


Retaining more regions through category reassignment


≥75% positive per bar • 81 regions in 4 categories • All previous 68 retained • Theta band: 4–8 Hz, 0–1 s

$\rho \leq 0$ $0 < \rho < 0.30$ $0.30 \leq \rho < 0.50$ $0.50 \leq \rho < 0.70$ $0.70 \leq \rho \leq 1.00$


A Attention-Qwen

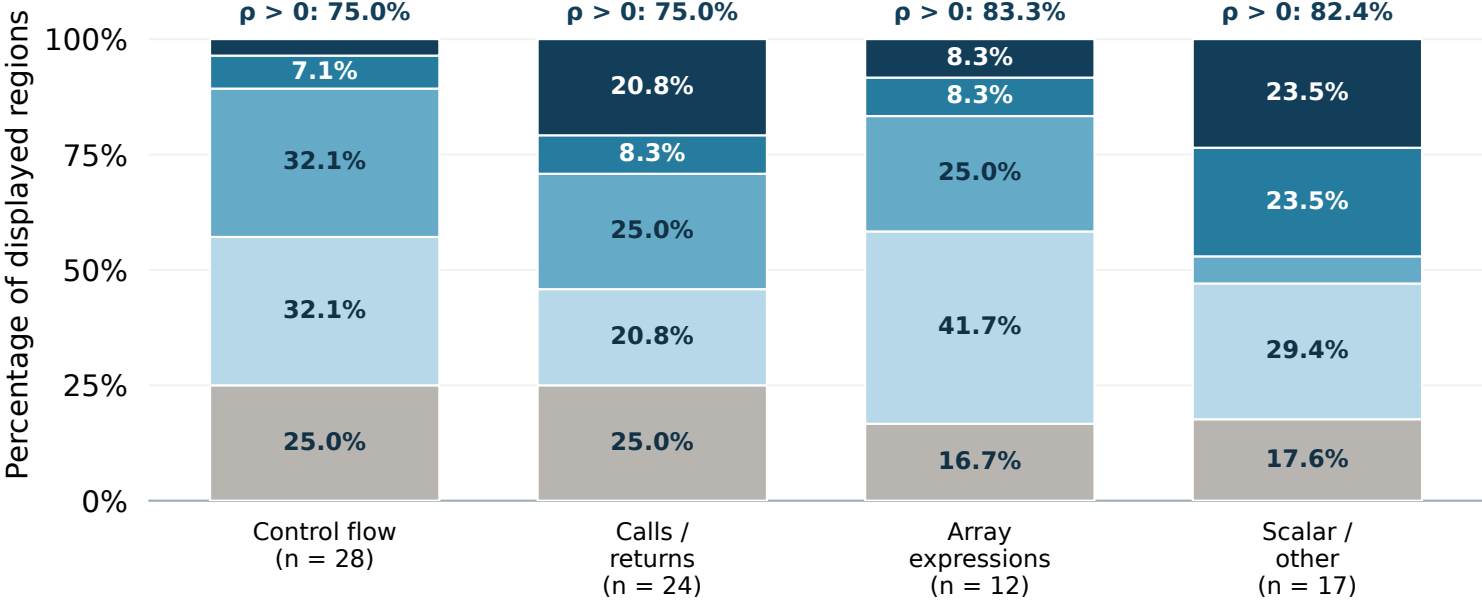


B Attention-GLM

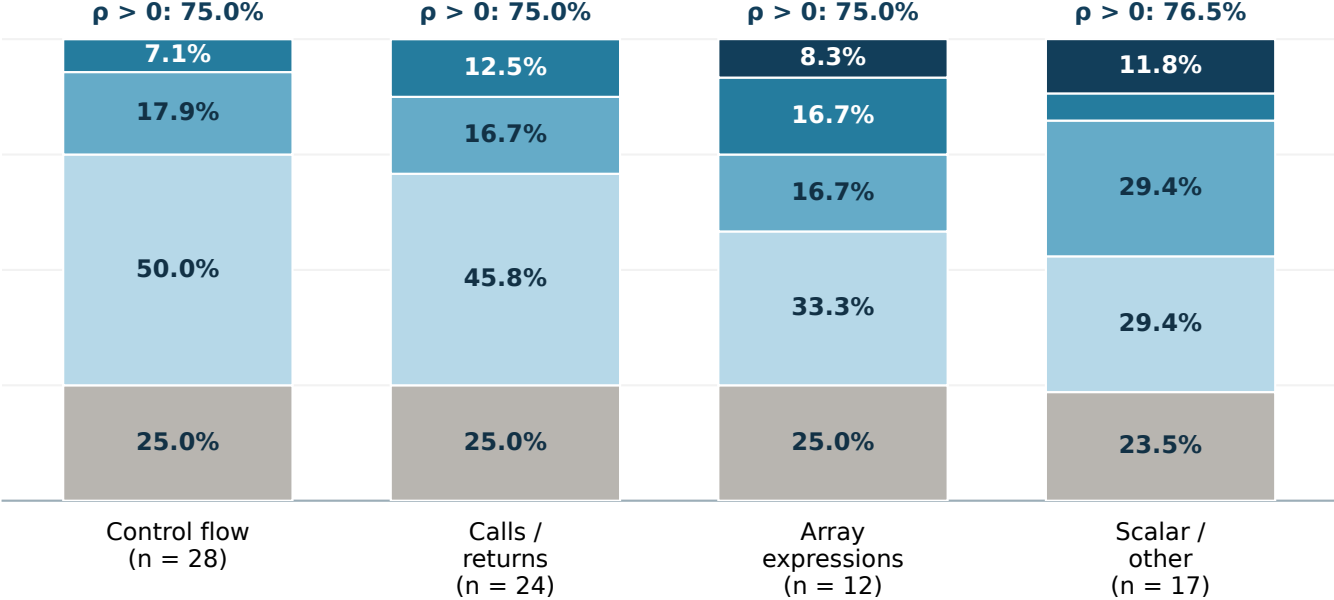

C EEG theta-band power-Qwen

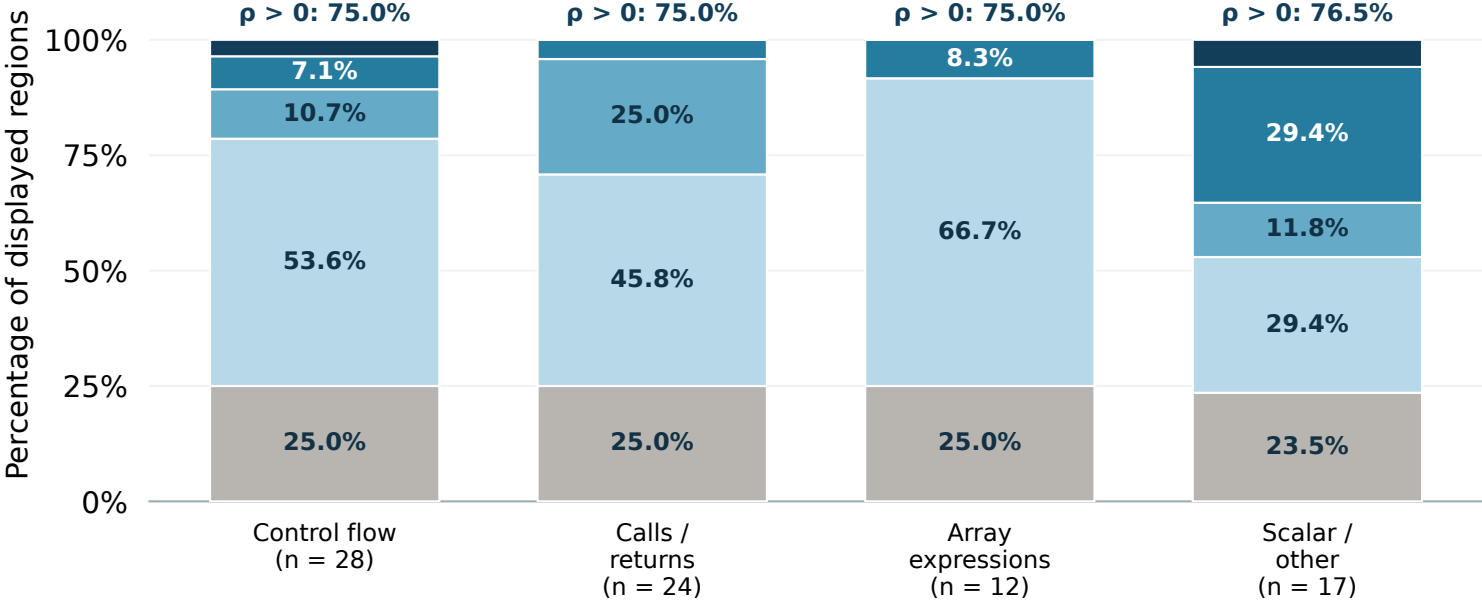

D EEG theta-band power-GLM

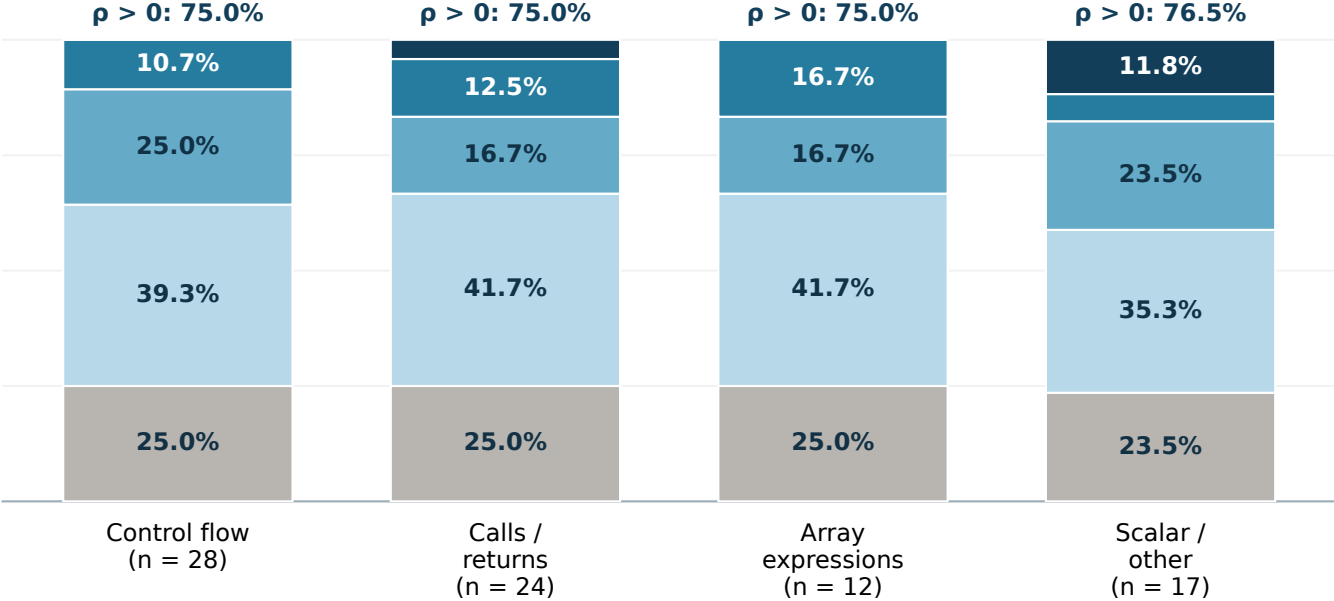

Code operation category

Code operation category

Each region appears once, in a category supported by its code. All four panels use identical region IDs and category denominators.

Added 13 regions from the original 135-region pool; 3 previous regions moved relative to the corresponding category scheme.

The optimizer first maximizes retained regions, then minimizes changes to previous assignments; every category contains at least five regions.

Original signed Spearman coefficients are unchanged. Grouping and inclusion are outcome-selected on these data, not independently validated.