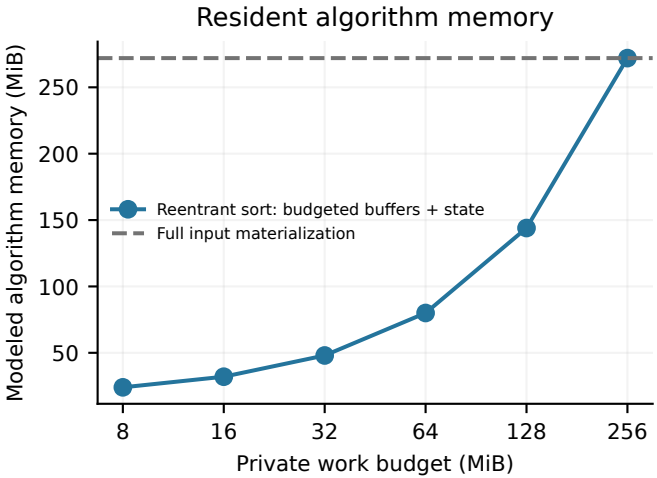
Resident algorithm memory
Modeled algorithm memory (MiB)
50
100
150
200
250
Reentrant sort: budgeted buffers + state
Full input materialization
8
16
32
64
128
256
Private work budget (MiB)

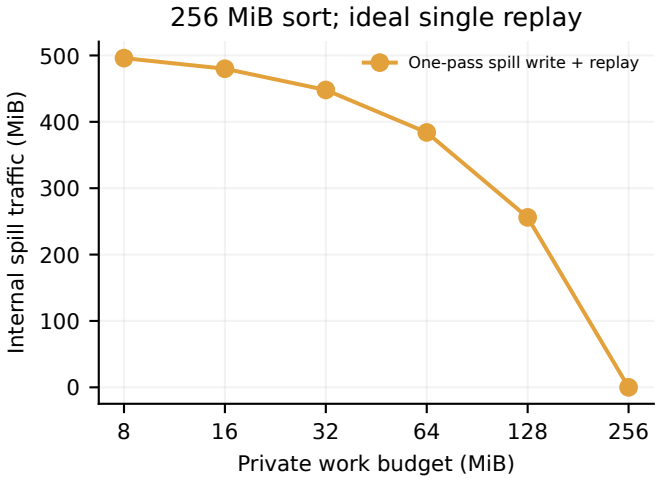
256 MiB sort; ideal single replay
Internal spill traffic (MiB)
0
100
200
300
400
500
One-pass spill write + replay
8
16
32
64
128
256
Private work budget (MiB)