

1 Available Escalations of the Personnel Time Management


This document describes the escalations available in PZW. If you want to activate an escalation, you must create a [configuration](#) for this escalation.

1.1 Clocking error of a person (PNR.CLOCKING_FAILURE)

If the work day evaluation generates the error *Wrong status sequence*, the escalation *PNR.CLOCKING_FAILURE* is generated. This escalation can be used to inform the supervisor by e-mail or the employee on the terminal.

If the recipient type *Automatic* is configured in the [Escalation configuration](#), the message is sent to the person that is the recipient of the escalation.

Configure the notification text in tab *Message*:

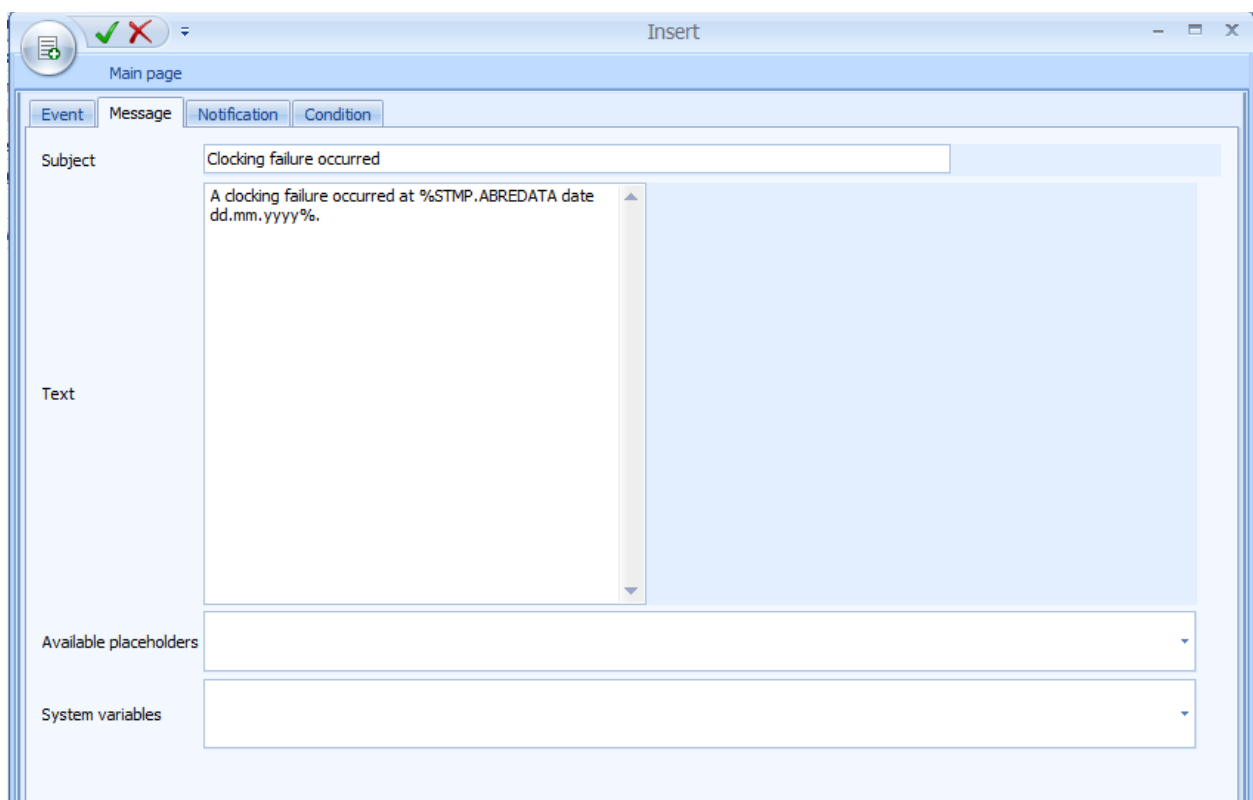

The screenshot shows a software window titled 'Main page' with a standard Windows-style title bar (minimize, maximize, close buttons). Inside the window, there are four tabs: 'Event', 'Message', 'Notification', and 'Condition'. The 'Message' tab is currently selected. The 'Message' tab contains two main text input areas. The first is labeled 'Subject' and contains the text 'Clocking failure occurred'. The second is labeled 'Text' and contains the text 'A clocking failure occurred at %STMP.ABREDATA date dd.mm.yyyy%'. Below these text areas, there are two dropdown menus. The first is labeled 'Available placeholders' and the second is labeled 'System variables'. Both dropdown menus are currently empty.

In tab *Notification*, you can define whether the message is sent by e-mail or displayed on the PZE terminal.

If you want to show the notifications on the terminal, the messages are cyclically transferred to the PZE terminals with the clocking authorizations. Consequently, the messages are available on the terminal (if the terminal is online) at the latest after the duration "cyclic loading" that is set in the [Terminal configuration](#) in tab *HR functions*. Once a message has been displayed, it is marked as read and is no longer transferred to the terminal with the next cyclic loading interval. However, the message can be displayed several times within one cyclic loading time.

If you have corrected a clocking error and performed the work day evaluation, the escalation is finished and the message to be displayed on the terminal is deleted, if it has not yet been shown. At the latest after the cyclic loading time, the message is no longer available and displayed on the terminal.

Note:

Messages can only be displayed on terminals of type CT-38x and CT-37x.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PNR.CLOCKING_FAILURE	PNR.PNR	Personnel number
	STMP.ABREDAT	Evaluation date
	PNR.NAME	Name of the person
	PNR.PNAME	Last name of the person
	PNR.PVORNAME	First name of the person
	PNR.FIR	Company of personnel number
	PNR.BER	Area of the person
	PNR.KST	Cost center of the person
	PNR.ABT	Department of the person
	PNR.PKREIS	Employee subgroup

The escalation is triggered in the following two cases:



- Clock-in time, but clock-out time is missing.
- Clock-out time, but clock-in time is missing.

With the escalation, you can automatically inform persons if faulty clockings were made and have them redo clockings.

1.2 Absence created (FZ.INSERTED)

The escalation *FZ.INSERTED* is generated if an absence is created. This escalation can be used to inform the supervisor by e-mail.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
FZ.INSERTED	FZ.FIR	Company
	FZ.PNR	Personnel number
	FZ.NAME:PNR	Name
	FZ.PNAME	Last name
	FZ.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	FZ.ENTLTMOD	Absence payment
	FZ.BEZK:ENTLTMOD	Absence abbreviation
	FZ.BEZL:ENTLTMOD	Absence designation
	FZ.KAT	Absence category
	FZ.DAT:APPLY	Date of request
	FZ.ZEI:APPLY	Time of request
	FZ.DATB	Start date
	FZ.DATE	End date
	FZ.BEZL	Comment
	FZ.VERWEIS	Unique record number

1.3 Absence changed (FZ.UPDATED)

The escalation *FZ.UPDATED* is generated if an absence is modified. This escalation can be used to inform the supervisor by e-mail.



The escalation *FZ.UPDATED* is only triggered if the time or the absence payment changes when the absence of a person is changed.

To create the message or to define conditions, the following placeholders are available:

Event	Identifiers	Description
FZ.UPDATED	FZ.FIR	Company
	FZ.PNR	Personnel number

	FZ.NAME:PNR	Name
	FZ.PNAME	Last name
	FZ.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	FZ.ENTLTMOD	Absence payment
	FZ.BEZE:ENTLTMOD	Absence abbreviation
	FZ.BEZE:ENTLTMOD	Absence designation
	FZ.KAT	Absence category
	FZ.DAT:APPLY	Date of request
	FZ.ZEI:APPLY	Time of request
	FZ.DATB	Start date
	FZ.DATE	End date
	FZ.BEZE	Comment
	FZ.VERWEIS	Unique record number
	FZ.ENTLTMODV	Previous absence payment
	FZ.BEZE:ENTLTMODV	Previous abbreviation of the absence
	FZ.BEZE:ENTLTMODV	Previous absence designation
	FZ.KATV	Previous absence category
	FZ.DATBV	Previous start date
	FZ.DATEV	Previous end date

1.4 Absence deleted (FZ.DELETED)

The escalation *FZ.DELETED* is generated if an absence is deleted. This escalation can be used to inform the supervisor by e-mail.


To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
FZ.DELETED	FZ.FIR	Company
	FZ.PNR	Personnel number
	FZ.NAME:PNR	Name
	FZ.PNAME	Last name
	FZ.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone

	PNR.EMAIL:FIR	Company e-mail
	FZ.ENTLTMOD	Absence payment
	FZ.BEZK:ENTLTMOD	Absence abbreviation
	FZ.BEZL:ENTLTMOD	Absence designation
	FZ.KAT	Absence category
	FZ.DAT:APPLY	Date of request
	FZ.ZEI:APPLY	Time of request
	FZ.DATB	Start date
	FZ.DATE	End date
	FZ.BEZL	Comment
	FZ.VERWEIS	Unique record number

1.5 A person joining the company (PNR.JOINING)

The escalation *PNR.JOINING* is generated daily up to 50 days before the person is joining the company. Using the variable *PNR.DAUER_EINTRITT*, you can use a condition to specify how many days the notification is made before the person is joining the company:

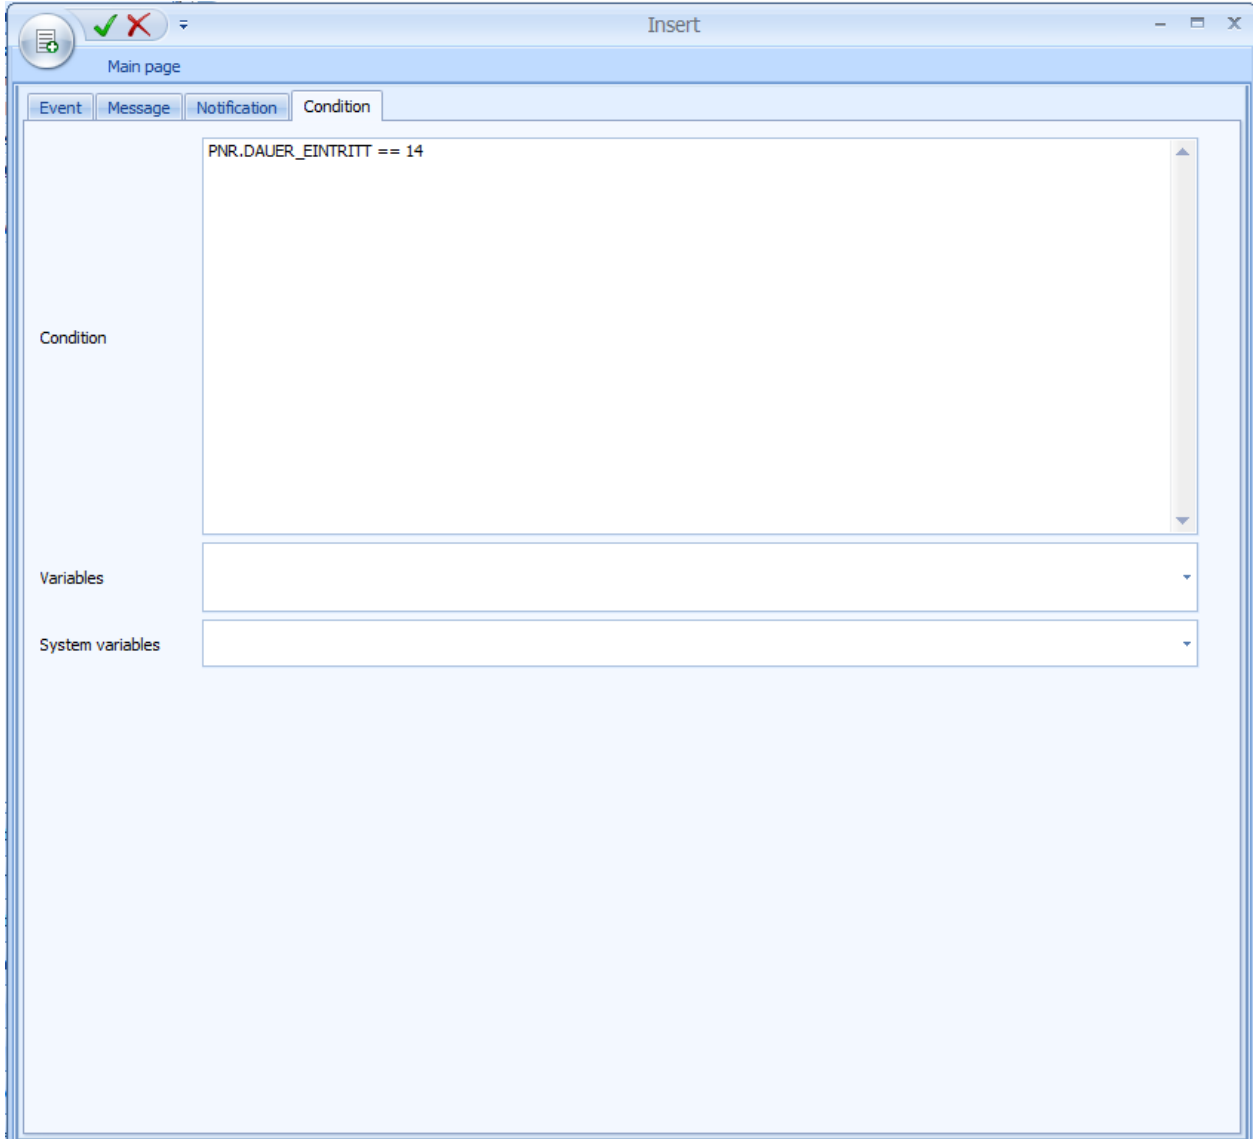

The screenshot shows a software window titled 'Insert'. It has a 'Main page' tab and a 'Condition' tab. The 'Condition' tab is active, and the text 'PNR.DAUER_EINTRITT == 14' is entered in the 'Condition' field. Below the condition field are two dropdown menus labeled 'Variables' and 'System variables'.

In this example, the message informing about a person joining the company is generated 14 days before the date of joining.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PNR.JOINING	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name


PNR.PNAME	Last name
PNR.PVORNAME	First name
PNR.BER	Area
PNR.KST	Cost center
PNR.ABT	Department
PNR.PKREIS	Employee subgroup
PNR.TAETIGKEIT	Activity of the person
PNR.BESCHVERH	Employment relationship
PNR.TEL:FIR	Company phone
PNR.EMAIL:FIR	Company e-mail
PNR.EINTRITT	Date of joining
PNR.DAUER_EINTRITT	Number of days before date of joining
PNR.VGS:PNR	Personnel number of supervisor
PNR.VGS:FIR	Company of supervisor



You can also use this escalation without the Personnel Time Management because the escalation is not triggered by the labor time calculation. The escalations are triggered by a cyclic process (scheduler), which is performed independent of the labor time calculation.

1.6 A person leaving the company (PNR.LEAVING)

The escalation *PNR.LEAVING* is generated on a daily basis up to 50 days before the person is leaving the company. The variable *PNR.DAUER_AUSTRITT* can be set in the condition wizard. This variable specifies how many days the message is displayed before the date of leaving:

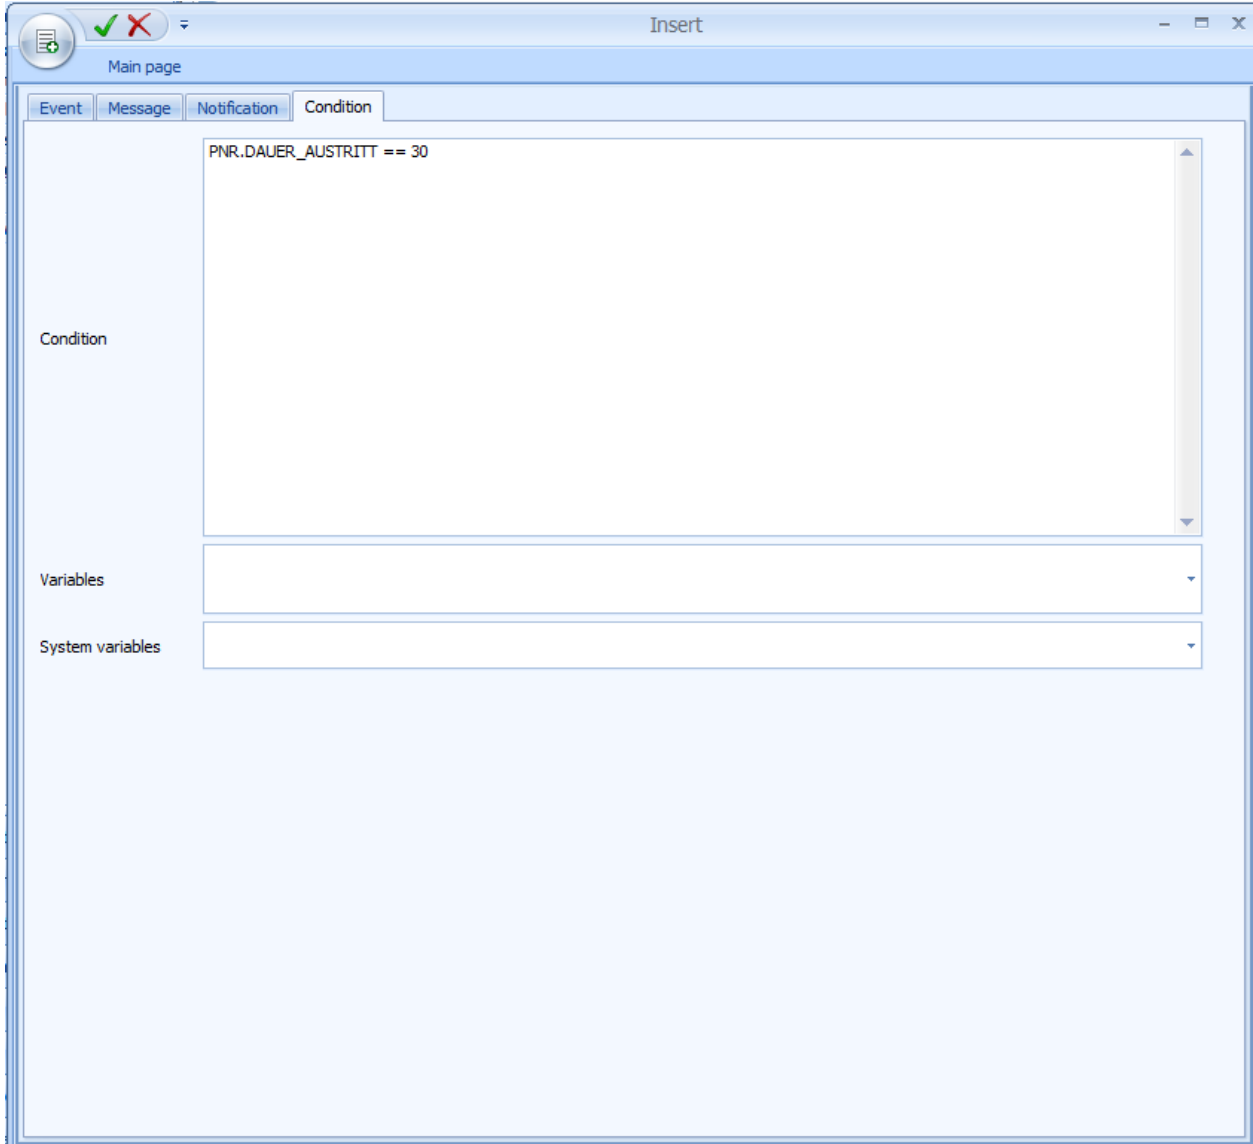

The screenshot shows a software window titled 'Insert'. It has a 'Main page' tab and a 'Condition' section. The 'Condition' section contains the text 'PNR.DAUER_AUSTRITT == 30'. Below this are two empty dropdown menus labeled 'Variables' and 'System variables'.

In this example the message informing about a person leaving the company is generated 30 days before the date of leaving.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PNR.LEAVING	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name


PNR.PNAME	Last name
PNR.PVORNAME	First name
PNR.BER	Area
PNR.KST	Cost center
PNR.ABT	Department
PNR.PKREIS	Employee subgroup
PNR.TAETIGKEIT	Activity of the person
PNR.BESCHVERH	Employment relationship
PNR.TEL:FIR	Company phone
PNR.EMAIL:FIR	Company e-mail
PNR.AUSTRITT	Date of leaving
PNR.DAUER_AUSTRITT	Number of days until date of leaving
PNR.VGS:PNR	Personnel number of supervisor
PNR.VGS:FIR	Company of supervisor



You can also use this escalation without the Personnel Time Management because the escalation is not triggered by the labor time calculation. The escalations are triggered by a cyclic process (scheduler), which is performed independent of the labor time calculation.

1.7 A person's birthday (PNR.BIRTHDAY)

The escalation *PNR.BIRTHDAY* is generated on a daily basis up to 50 days before a person's birthday. The variable *PNR.DAUER_GEBDAT* can be set in the condition wizard and defines how many days before the birthday the message is displayed:

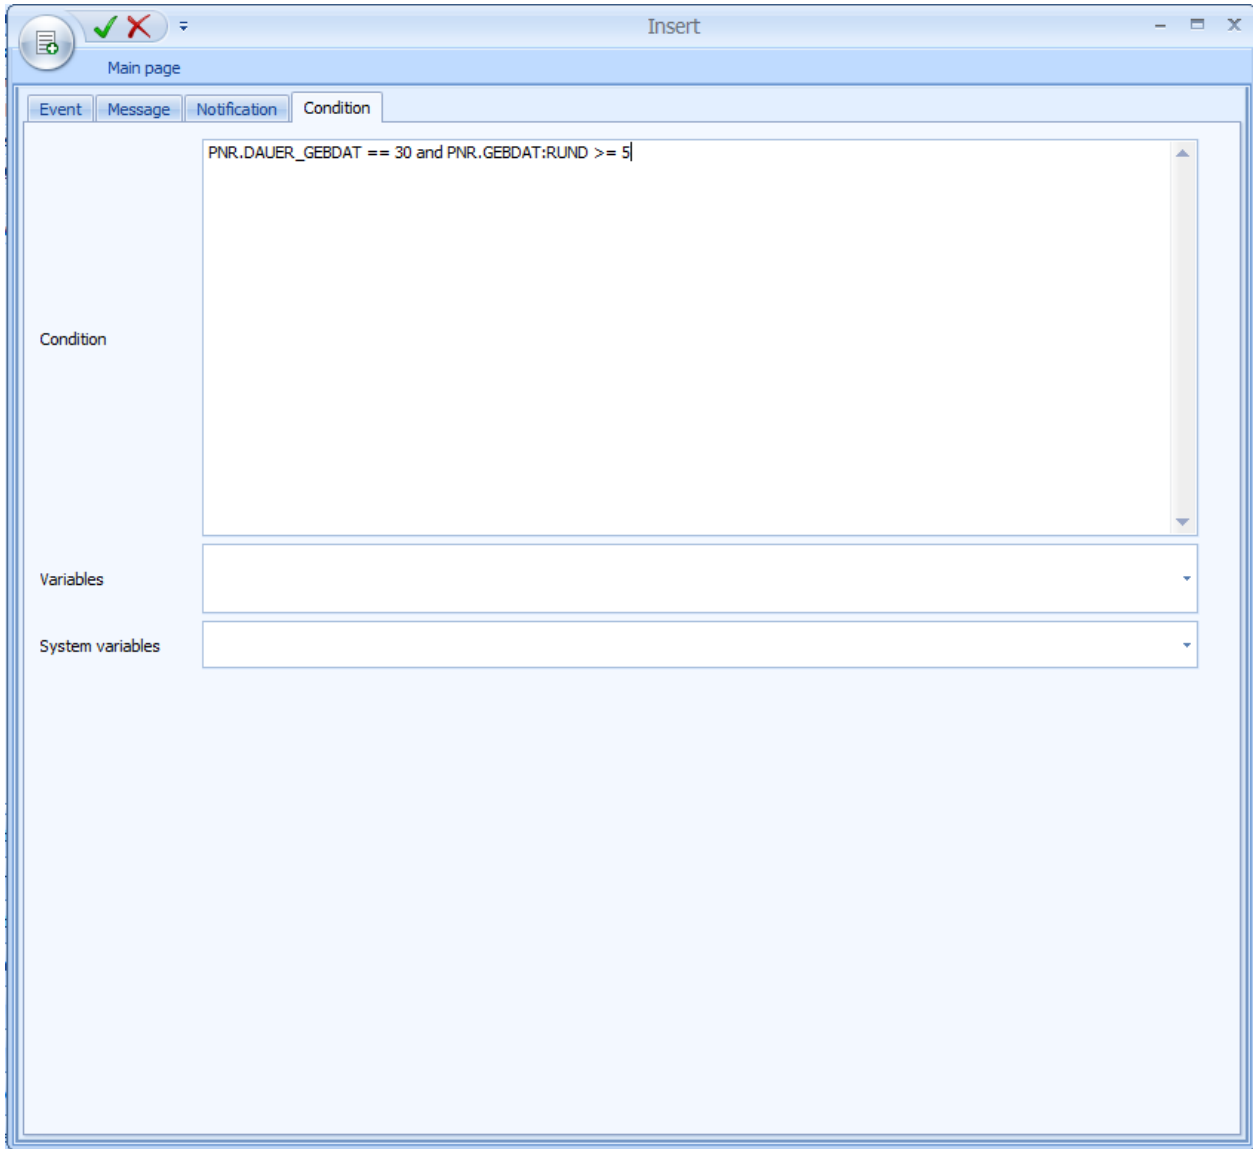

The screenshot shows a software window titled 'Main page' with a tabbed interface. The 'Condition' tab is active, displaying the text: `PNR.DAUER_GEBDAT == 30 and PNR.GEBDAT:RUND >= 5`. Below this text are two empty input fields labeled 'Variables' and 'System variables'.

In this example, the message informing about the person's birthday is generated on the day of the birthday if it is a milestone birthday that can be divided by 5 or 10.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PNR.BIRTHDAY	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name


PNR.PNAME	Last name
PNR.PVORNAME	First name
PNR.BER	Area
PNR.KST	Cost center
PNR.ABT	Department
PNR.PKREIS	Employee subgroup
PNR.TAETIGKEIT	Activity of the person
PNR.BESCHVERH	Employment relationship
PNR.TEL:FIR	Company phone
PNR.EMAIL:FIR	Company e-mail
PNR.GEBTG	Date of the next birthday
PNR.GEBDAT	Date of birth
PNR.DAUER_GEBDAT	Number of days until birthday
PNR.GEBDAT:RUND	Milestone birthdays: 10 = birthday can be divided by 10 5 = birthday can be divided by 5 1 = no milestone birthday
PNR.ALTER	Age in years
PNR.VGS:PNR	Personnel number of supervisor
PNR.VGS:FIR	Company of supervisor



You can also use this escalation without the Personnel Time Management because the escalation is not triggered by the labor time calculation. The escalations are triggered by a cyclic process (scheduler), which is performed independent of the labor time calculation.

1.8 A person's company anniversary (PNR.JUBILEE)

The escalation PNR.JUBILEE is generated on a daily basis up to 50 days before the person's company anniversary. The variable PNR.DAUER_JUBIDAT can be set in the condition wizard. This variable defines how many days before the anniversary the message is displayed:

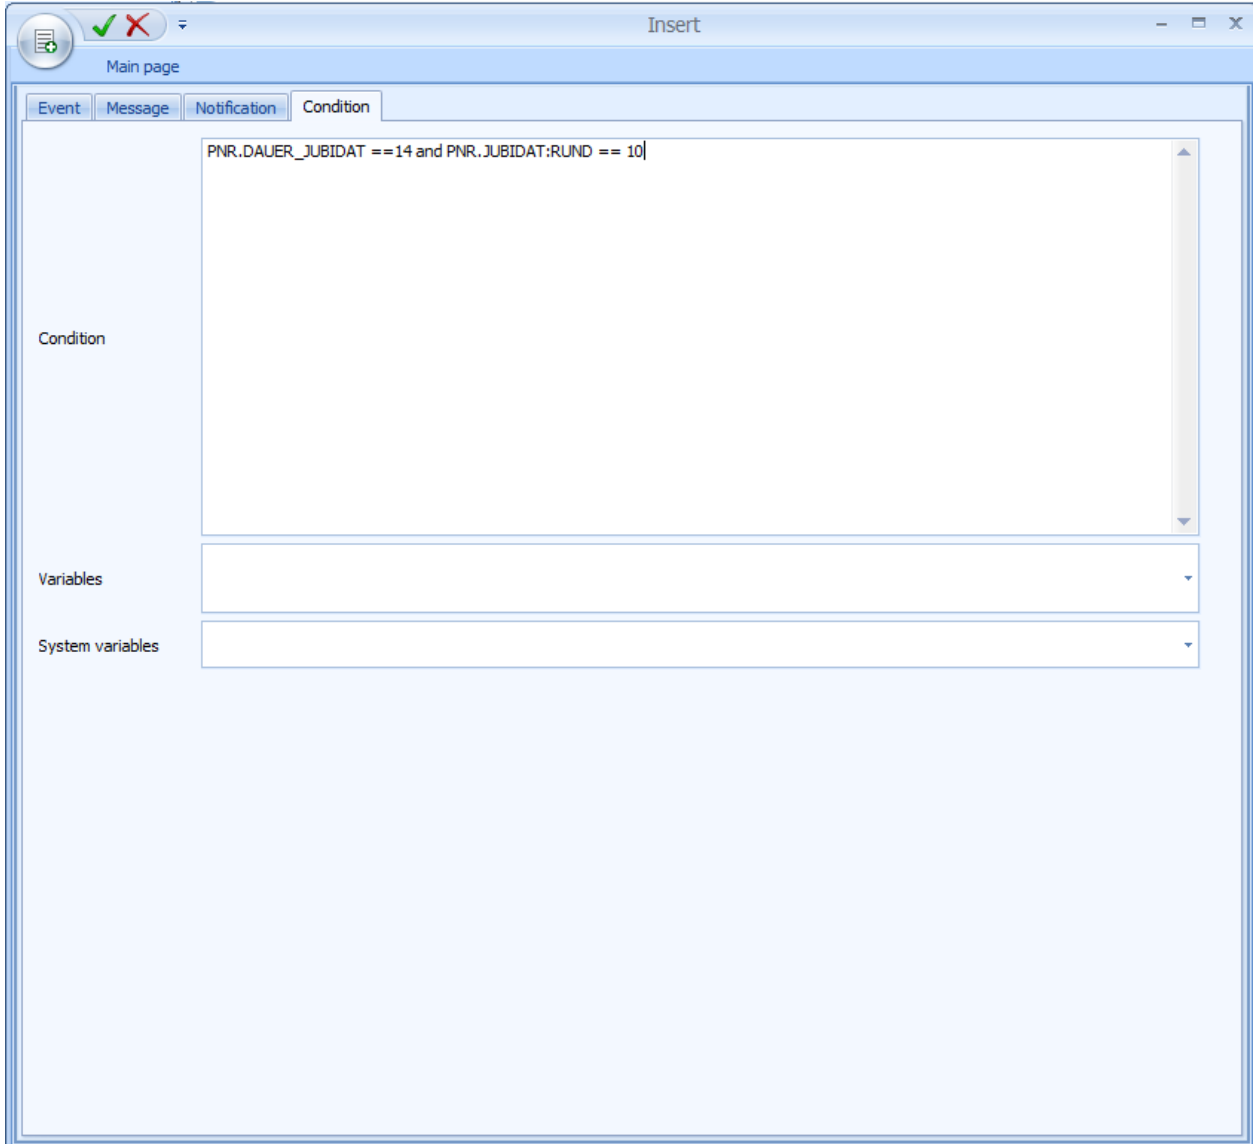

The screenshot shows a software window titled 'Insert'. It has a 'Main page' tab and a 'Condition' tab. The 'Condition' tab is active, displaying the text 'PNR.DAUER_JUBIDAT == 14 and PNR.JUBIDAT:RUND == 10'. Below this text are two dropdown menus labeled 'Variables' and 'System variables'.

In this example, the message informing about the person's company anniversary is generated 14 days before the date if it is a milestone anniversary that can be divided by 10.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PNR.JUBILEE	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name

PNR.PNAME	Last name
PNR.PVORNAME	First name
PNR.BER	Area
PNR.KST	Cost center
PNR.ABT	Department
PNR.PKREIS	Employee subgroup
PNR.TAETIGKEIT	Activity of the person
PNR.BESCHVERH	Employment relationship
PNR.TEL:FIR	Company phone
PNR.EMAIL:FIR	Company e-mail
PNR.EINTRITT	Date of joining
PNR.JUBIDAT	Date of company anniversary
PNR.DAUER_JUBIDAT	Number of days until anniversary
PNR.JUBIDAT:RUND	Milestone company anniversary: 10 = anniversary can be divided by 10 5 = anniversary can be divided by 5 1 = no milestone anniversary
PNR.JUBI	Company anniversary in years
PNR.VGS:PNR	Personnel number of supervisor
PNR.VGS:FIR	Company of supervisor




You can also use this escalation without the Personnel Time Management because the escalation is not triggered by the labor time calculation. The escalations are triggered by a cyclic process (scheduler), which is performed independent of the labor time calculation.

1.9 Unplanned absence (PNR.UNPLANNED_ABSENCE)

The escalation *PNR.UNPLANNED_ABSENCE* informs that an employee is absent unplanned. Using this escalation, a supervisor can be informed shortly after start of shift that an employee planned for the shift is not present (or has forgotten to clock-in).

This escalation is cyclically processed. In the [Escalation Configuration](#), you can configure the cycle time used to identify absent employees. Note: a cycle time of some minutes only can cause a high system load.

You can set the variable PNR.ABWDAU in the condition wizard. This variable defines how long the person must at least be absent unplanned before the escalation is triggered:

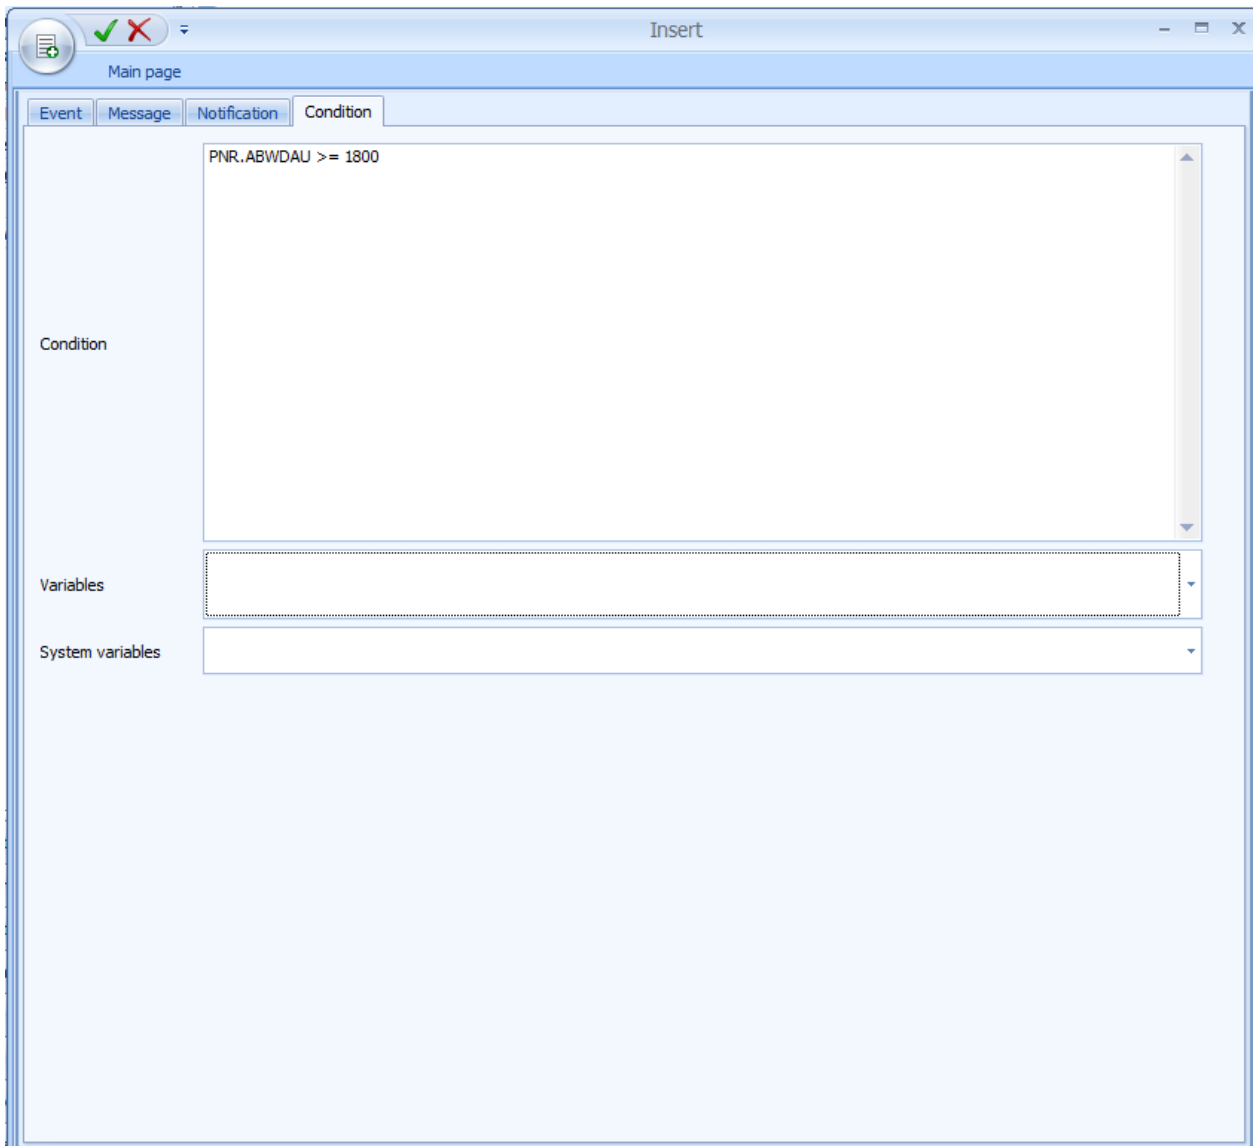

The screenshot shows a software window titled "Insert" with a "Main page" tab. Below the tab are four sub-tabs: "Event", "Message", "Notification", and "Condition". The "Condition" tab is active, displaying a text area with the condition "PNR.ABWDAU >= 1800". Below this text area are two empty input fields labeled "Variables" and "System variables".

In this example, the escalation is only triggered if the employee is absent (unplanned) for at least 30 minutes (1800 seconds).

To create the message or define conditions, the following placeholders are available:


Event	Identifiers	Description
PNR.UNPLANNED_ABSENCE	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.ABWDAT	Start date of unplanned absence
	PNR.ABWZEI	Start time of unplanned absence
	PNR.ABWDAU	Duration of unplanned absence up to now
	PNR.ANW	J = Person was present before N = Person was not present before
	PNR.VGS:PNR	Personnel number of supervisor
	PNR.VGS:FIR	Company of supervisor



The escalation is triggered, when no attendance time is available on a day with a target time stored for a person. Also subsequent clockings, which are not approved by the supervisor, will therefore trigger this escalation.

1.10 End of continued pay (PNR.END_OF_CONTINUED_PAY)

The escalation *PNR.END_OF_CONTINUED_PAY* is generated on a daily basis up to 50 days before the end of a person's continued pay. The variable *PNR.DAUER_OLFZ* can be set in the condition wizard. This variable defines how many days before the end of the continued pay the message is displayed:

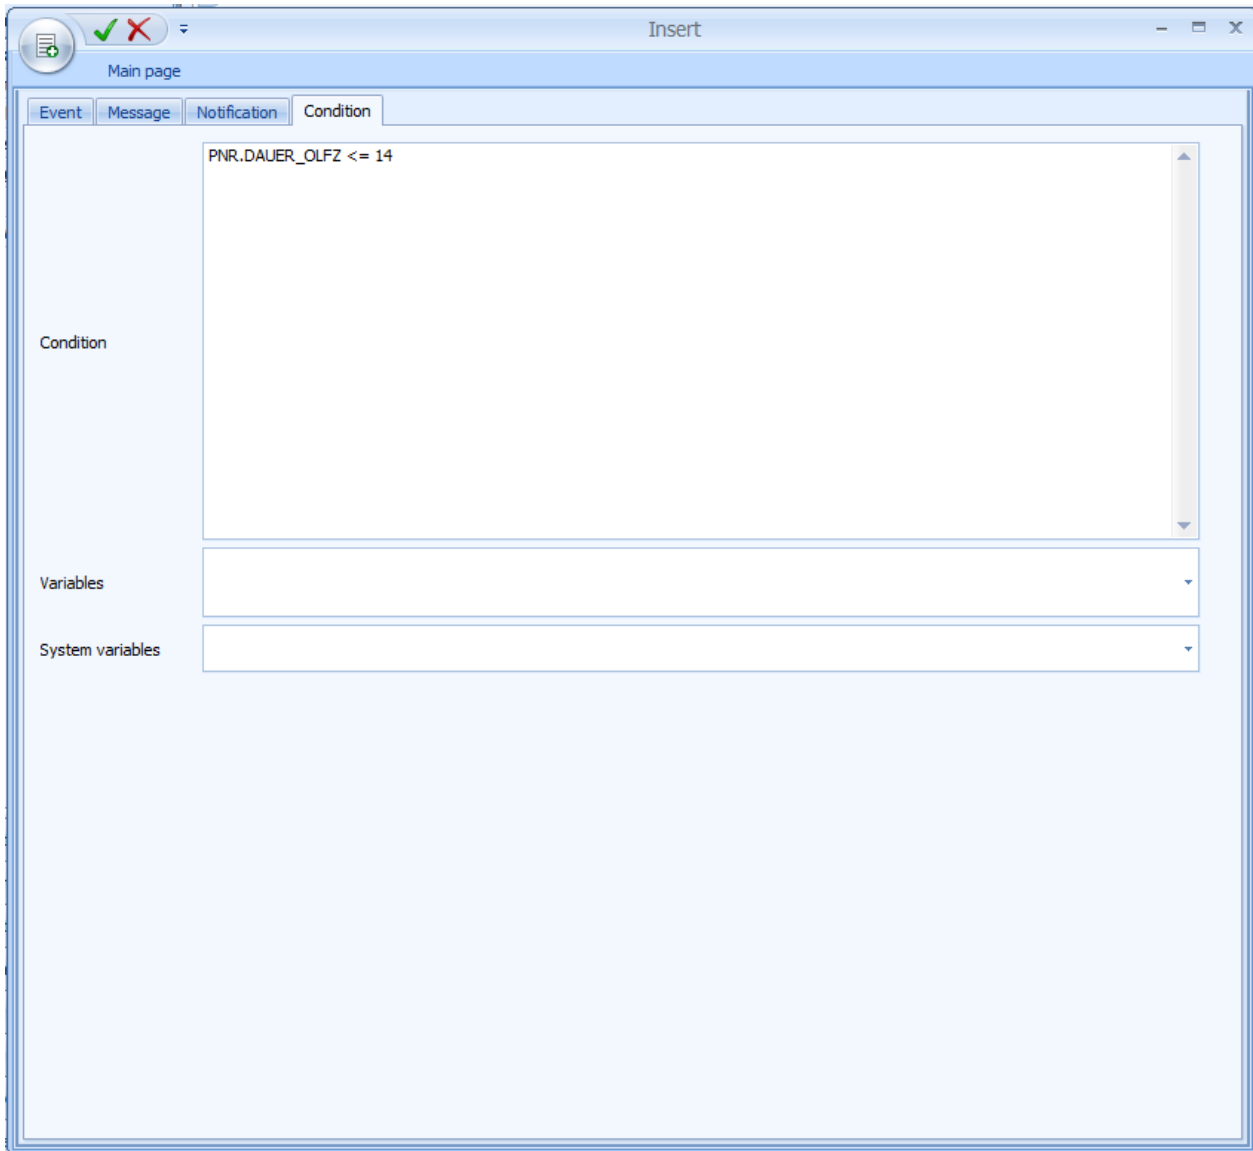

The screenshot shows a software window titled "Insert" with a "Main page" tab. Inside, there are four tabs: "Event", "Message", "Notification", and "Condition". The "Condition" tab is active, and it contains a text area with the condition `PNR.DAUER_OLFZ <= 14`. Below the text area, there are two empty dropdown menus labeled "Variables" and "System variables".

In this example, the message informing about a person is generated 14 days before the end of the continued pay. If you use the operator "`<=`" (less than or equal to), the message is also generated if the end of the continued pay is reached in less than 14 days, e.g. because of a short-term planning. As a result, the escalation is also generated on the next day if you have finished the escalation before the end of the continued pay. The escalation management creates this escalation on a daily basis, if the escalation is not available for the person and the end date of the continued pay. If you use the operator "`=`", the escalation is not generated several times. But the message is also not generated if the end of the continued pay is less than 14 days in the future, e.g. when a pre-existing illness is assigned in this period.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PNR.END_OF_CONTINUED_PAY	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.DATE_LFZ	End of continued pay
	PNR.DATB_OLFZ	First day without continued pay
	PNR.DAUER_OLFZ	Number of days until continued pay ends
	PNR.VGS:PNR	Personnel number of supervisor
	PNR.VGS:FIR	Company of supervisor



The escalation is triggered if an absence with a subsequent payment has been planned for a person and if the subsequent payment is due because the period of continued pay has exceeded. Use the variable PNR.DAUER_OLFZ to control when the escalation is triggered: number of days before the planned subsequent payment is due.

1.11 Escalation of PZE/PZW messages

General

You can trigger PNR.TIMESYSTEM_MESSAGE escalations when specified messages of the Personnel Time Management occur. The system can process messages of the *Labor time calculation* and of the *Monthly evaluation*.


The escalations can be used to inform the supervisor by e-mail or the employee on the terminal.

If the recipient type *Automatic* is configured in the *Escalation configuration*, the message is sent to the person that is the recipient of the escalation.

Escalation configuration					
Drag a column here to group by that column					
Event	Reference	Event	Designation	Recipient type	Recipient
	31	PNR.TIMESYSTEM_MESSAGE	PZE message 04 37 No Clock-IN or Clock...	Automatic	
	32	PNR.TIMESYSTEM_MESSAGE	PZE message 05 37 previous evaluation	Automatic	
	33	PNR.TIMESYSTEM_MESSAGE	PZE message 20 37 absent without abse...	Automatic	
	34	PNR.TIMESYSTEM_MESSAGE	PZE message 11 37 Target time not reac...	Automatic	

1.11.1 Configuration in HYDRA

When you configure the escalation in the *Escalation configuration*, you can set *Conditions* for the messages to control the escalations for the separate messages and to configure a good text for the specified message:

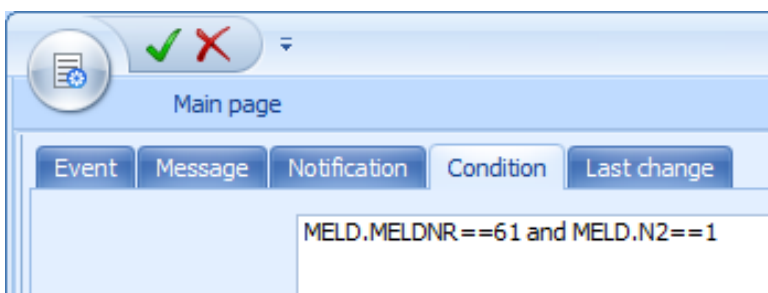


The screenshot above shows the condition of the message 61 for account number 1 (the account XX was limited from XXX to XXX):

MELD.MELDNR==61 and MELD.N2==1

The text of the notification can be configured in tab *Message*: The example shows the message of an output:

Neg. flexaccount person 906000 Schulz, Paul: -10.233

flexaccount limited from -59:52 to -34:52.

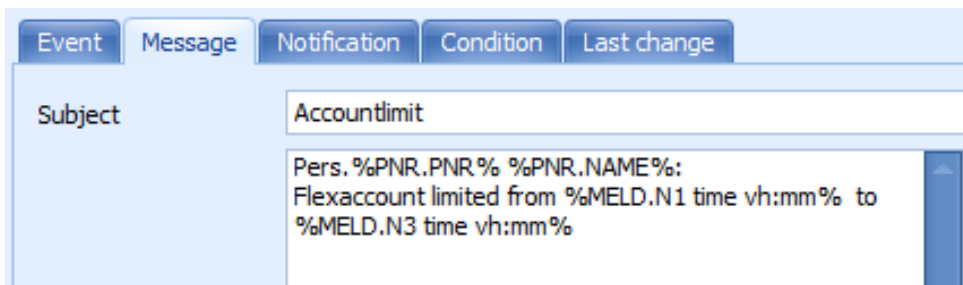

Find below a detailed list of all parameters that are available for the condition and the message.

Notes on the formatting of times and dates

Date

You must insert the date variables with formatting instruction to get an output in German format. Example:

```
%DAT date dd.mm.yy%
```

Durations and times

HYDRA internally processes durations and times in seconds and provides this value also for conditions and messages. To show these values as hours/minutes, you must also use a formatting instruction. Examples:

```
%MELD.N1 time vh:mm%
```

(formatting as duration/time in normal time, the "v" stands for the algebraic sign)

```
%MELD.N1 time vh,ii%
```

(formatting as duration/time in industrial minutes, the "v" stands for the algebraic sign)

If you use the letter "h" with several places, you can configure leading zeros:

```
%MELD.N1 time vhhh:mm%
```

In tab *Notification*, you can define whether the message is sent by e-mail or displayed on the PZE terminal.

If you want to show the notifications on the terminal, the messages are cyclically transferred to the PZE terminals with the clocking authorizations. Consequently, the messages are available on the terminal (if the terminal is online) at the latest after the duration *Cyclic loading* that is set in the *Terminal configuration* in tab *HR functions*. Once a message has been displayed, it is marked as read and is no longer transferred to the terminal with the next cyclic loading interval. However, the message can be displayed several times within one cyclic loading time.

If the cause of the message is eliminated and the labor time calculation or the monthly evaluation is performed a new time, then the escalation is finished and the message to be displayed on the terminal is deleted if it has not yet been shown. At the latest after the cyclic loading time, the message is no longer available and displayed on the terminal.

Note:

Messages can only be displayed on terminals of type CT-38x and CT-37x.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
-------	-------------	-------------

Event	Identifiers	Description
PNR.TIMESYSTEM_MESSAGE	MELD.DAT	Date of message
	MELD.MELDNR	Message number. Available message numbers see below.
	MELD.N1	Numeric parameter 1. Availability and meaning depend on the message number. See below.
	MELD.N2	Numeric parameter 2. Availability and meaning depend on the message number. See below.
	MELD.N3	Numeric parameter 3. Availability and meaning depend on the message number. See below.
	MELD.F1	Decimal parameter 1. Availability and meaning depend on the message number. See below.
	MELD.F2	Decimal parameter 2. Availability and meaning depend on the message number. See below.
	MELD.F3	Decimal parameter 3. Availability and meaning depend on the message number. See below.
	MELD.D1	Date parameter. Availability and meaning depend on the message number. See below.
	MELD.T1	Text parameter 1. Availability and meaning depend on the message number. See below.
	MELD.STUFE	"*": The message informs about an error. "C": The message informs about a posting that requires approval. Other: It is an information message.
	MELD.VERWEIS	Unique data record number of message
	PNR.PNR	Personnel number
	PNR.NAME	Name of person (first and last name)
	PNR.PNAME	Last name
	PNR.PVNAME	First name
	PNR.FIR	Company of the person
	PNR.BER	Area of the person
	PNR.KST	Cost center of the person
	PNR.ABT	Department of the person
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship of the person
	PNR.TEL:FIR	Telephone number (company)
	PNR.EMAIL:FIR	E-mail address (company)
	PNR.PNR:VGS	Personnel number of supervisor of the person

Event	Identifiers	Description
	KEY_1 KEY_2 KEY_3 KEY_4	Used internally by HYDRA: Combined keys to guarantee a unique assignment of a message to the escalation

Message numbers and available parameters

The parameters F1 to F3 are equivalent to the parameters N1 to N3 and include the same value converted in hours or days as floating point number.

No.	Posting	Parameter	Content
1	Shift type not in shift day type	-	-
2	No valid payment day type found	-	-
3	No valid shift or flextime day type	-	-
4	Wrong status sequence	N1/F1	Clock-in time, but clock-out time is missing
		N2/F2	Clock-out time, but clock-in time is missing
5	Previous evaluation of ????.???? not ok.	D1	Date when the evaluation is not ok
8	Absence payment: ??? ??????	N1	Number of the absence payment
		T1	Name of absence payment
10	Several clocking-ins exist	-	-
11	Target time has not been reached	N1/F1	Working time
		N2/F2	Target time
		N3/F3	Difference target time - working time
12	Clock-IN too late	N1/F1	Clock-in time
		N2/F2	Target start
		N3/F2	Difference actual - target
13	Clock-OUT too early	N1/F1	Clock-in time
		N2/F2	Target end
		N3/F2	Difference target - actual
14	Present although absence planned	N1	Number of the actually planned absence payment
17	Max. working time exceeded	N1/F1	Working time
		N2/F2	Maximum working time
		N3/F3	Difference working time - maximum time
19	Please authorize wage type posting	N1/F1	Start of wage type postings that require authorization
		N2/F2	End of wage type postings that require authorization
		N3/F3	Duration of wage type postings that require authorization

		T1	Wage type
20	Absent although working time planned	-	-
22	Locked by application ??? on MOC ??? when day evaluation was performed.	T1	Abbreviation of application
23	Locked by application ??? on MOC ??? when wage type posting was performed.	T1	Abbreviation of application
24	Monthly evaluation / Please authorize wage type posting	N1/F1	Start of wage type postings that require authorization
		N2/F2	End of wage type postings that require authorization
25	Locked by application ??? on MOC ??? when monthly evaluation was performed.	T1	Abbreviation of program
28	Violation of rest period	N1/F1	Actual rest period
		N2/F2	Target rest period
		N3/F3	Difference target - actual
29	Core time violation	N1/F1	Time from
		N2/F2	Time to
		N3/F3	Duration
51	Negative account 1 -???:??:??	N1/F1	Account balance
To	To	N2	Account number
58	Negative account 8 -???:??:??	T1	Name of the account
61	Account 1 has been limited from ???:?? to ???:??	N1/F1	Account balance before limitation
To	To	N2	Account number
68	Account 8 has been limited from ???:?? to ???:??	T1	Name of the account
90	The overtime period on the ??..??..???? is missing for company ???	T1	Company
		D1	Date
91	The month period for year ??? is missing for company ??? Period ??	T1	Company
		D1	Date

1.12 Escalation for shift plan changes (personal day types, models and working times)

General

You can change the shift plan and the planned working times using the functions *Personal day types*, *Personal models* and *Personal working time*. You can use the escalations PTYP.*, PMOD.* and PAZ.* to inform the employees and supervisors about the changes of the shift plan.

For the 3 functions, the application provides 3 escalations each when a planning is created, changed and deleted.

1.12.1 Configuration in HYDRA

1.12.1.1 Personal day type created (PTYP.INSERTED)

The escalation *PTYP.INSERTED* is generated when a Personal day type has been created. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PTYP.INSERTED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PTYP.DATB	Start date
	PTYP.DATE	End date
	PTYP.GUELT	V=The Personal day type is completely in the past H=The Personal day type is valid on the current day or on future days Z=The Personal day type is only valid on future days
	PTYP.WTG	Week day: MON=Monday TUE=Tuesday WED=Wednesday THU=Thursday FRI=Friday SAT=Saturday SUN=Sunday ALL=All weekdays
	PTYP.GLZTMOD	Working time day type
	PTYP.BEZ:GLZTMOD	Name of the working time day type
	PTYP.SCHZART	Shift type
	PTYP.ENTLTMOD	Payment day type
	PTYP.BEZK:ENTLTMOD	Short name of the payment day type
	PTYP.BEZ:ENTLTMOD	Name of the payment day type
	PTYP.BEM	Comment
	PTYP.VERWEIS	Unique record number

1.12.1.2 Personal day type changed (PTYP.UPDATED)

The escalation *PTYP.UPDATED* is generated when a Personal day type has been changed. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PTYP.UPDATED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PTYP.DATBV	Previous start date
	PTYP.DATEV	Previous end date
	PTYP.DATB	Start date
	PTYP.DATE	End date
	PTYP.GUELT	V=The Personal day type was completely in the past before and after the change H=The Personal day type was or is valid on the current day or on future days Z=The Personal day type was or is only valid on future days
	PTYP.WTGV	Previous week day: MON=Monday TUE=Tuesday WED=Wednesday THU=Thursday FRI=Friday SAT=Saturday SUN=Sunday ALL=All weekdays
	PTYP.WTG	Week day: MON=Monday TUE=Tuesday WED=Wednesday THU=Thursday FRI=Friday SAT=Saturday SUN=Sunday ALL=All weekdays

	PTYP.GLZTMODV	Previous working time day type
	PTYP.BEZ:GLZTMODV	Name of the previous working time day type
	PTYP.GLZTMOD	Working time day type
	PTYP.BEZ:GLZTMOD	Name of the working time day type
	PTYP.SCHZARTV	Previous shift type
	PTYP.SCHZART	Shift type
	PTYP.ENTLTMODV	Previous payment day type
	PTYP.BEZK:ENTLTMODV	Short name of the previous payment day type
	PTYP.BEZ:ENTLTMODV	Name of the previous payment day type
	PTYP.ENTLTMOD	Payment day type
	PTYP.BEZK:ENTLTMOD	Short name of the payment day type
	PTYP.BEZ:ENTLTMOD	Name of the payment day type
	PTYP.BEMV	Previous comment
	PTYP.BEM	Comment
	PTYP.VERWEIS	Unique record number



The fields that include the previous value of a field always refer to the value that the field contained before the personal day type has been changed.

1.12.1.3 Personal day type deleted (PTYP.DELETED)

The escalation *PTYP.DELETED* is generated when a Personal day type has been deleted. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PTYP.DELETED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PTYP.DATB	Start date
	PTYP.DATE	End date

	PTYP.GUELT	V=The Personal day type was completely in the past H=The Personal day type was valid on the current day or on future days Z=The Personal day type was only valid on future days
	PTYP.WTG	Week day: MON=Monday TUE=Tuesday WED=Wednesday THU=Thursday FRI=Friday SAT=Saturday SUN=Sunday ALL=All weekdays
	PTYP.GLZTMOD	Working time day type
	PTYP.BEZ:GLZTMOD	Name of the working time day type
	PTYP.SCHZART	Shift type
	PTYP.ENTLTMOD	Payment day type
	PTYP.BEZK:ENTLTMOD	Short name of the payment day type
	PTYP.BEZ:ENTLTMOD	Name of the payment day type
	PTYP.BEM	Comment
	PTYP.VERWEIS	Unique record number

1.12.1.4 Personal model created (PMOD.INSERTED)

The escalation *PMOD.INSERTED* is generated when a Personal model has been created. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PMOD.INSERTED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PMOD.DATB	Start date
	PMOD.DATE	End date

	PMOD.GUELT	V=The Personal model is completely in the past H=The Personal model is valid on the current day or on future days H=The Personal model is only valid on future days
	PMOD.GLZJMOD	Working time model
	PMOD.BEZ:GLZJMOD	Name of the working time model
	PMOD.SCHZARTMOD	Shift rhythm model
	PMOD.BEZ:SCHZARTMOD	Name of the shift rhythm model
	PMOD.ENTLJMOD	Payment model
	PMOD.BEZ:ENTLJMOD	Name of the payment model
	PMOD.MEHRARBTyp	Overtime type
	PMOD.BEZ:MEHRARBTyp	Name of the overtime type
	PMOD.BEM	Reserved for future extension
	PMOD.VERWEIS	Unique record number

1.12.1.5 Personal model changed (PMOD.UPDATED)

The escalation *PMOD.UPDATED* is generated when a Personal model has been changed. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PMOD.UPDATED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PMOD.DATBV	Previous start date
	PMOD.DATEV	Previous end date
	PMOD.DATB	Start date
	PMOD.DATE	End date
	PMOD.GUELT	V=The Personal model was completely in the past before and after the change H=The Personal model was or is valid on the current day or on future days Z=The Personal model was or is only valid on future days
	PMOD.GLZJMODV	Previous working time model

	PMOD.BEZ:GLZJMODV	Name of the previous working time model
	PMOD.GLZJMOD	Working time model
	PMOD.BEZ:GLZJMOD	Name of the working time model
	PMOD.SCHZARTMODV	Previous shift rhythm model
	PMOD.BEZ:SCHZARTMODV	Name of the previous shift rhythm model
	PMOD.SCHZARTMOD	Shift rhythm model
	PMOD.BEZ:SCHZARTMOD	Name of the shift rhythm model
	PMOD.ENTLJMODV	Previous payment model
	PMOD.BEZ:ENTLJMODV	Name of the previous payment model
	PMOD.ENTLJMOD	Payment model
	PMOD.BEZ:ENTLJMOD	Name of the payment model
	PMOD.MEHRARBTYPV	Previous overtime type
	PMOD.BEZ:MEHRARBTYPV	Name of the previous overtime type
	PMOD.MEHRARBTYP	Overtime type
	PMOD.BEZ:MEHRARBTYP	Name of the overtime type
	PMOD.BEMV	Reserved for future extension
	PMOD.BEM	Reserved for future extension
	PMOD.VERWEIS	Unique record number



The fields that include the previous value of a field always refer to the value that the field contained before the personal model has been changed.

1.12.1.6 Personal model deleted (PMOD.DELETED)

The escalation *PMOD.DELETED* is generated when a Personal model has been deleted. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PMOD.DELETED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PMOD.DATB	Start date

	PMOD.DATE	End date
	PMOD.GUFLT	V=The Personal model was completely in the past H=The Personal model was valid on the current day or on future days Z=The Personal model was only valid on future days
	PMOD.GLZJMOD	Working time model
	PMOD.BEZ:GLZJMOD	Name of the working time model
	PMOD.SCHZARTMOD	Shift rhythm model
	PMOD.BEZ:SCHZARTMOD	Name of the shift rhythm model
	PMOD.ENTLJMOD	Payment model
	PMOD.BEZ:ENTLJMOD	Name of the payment model
	PMOD.MEHRARBTyp	Overtime type
	PMOD.BEZ:MEHRARBTyp	Name of the overtime type
	PMOD.BEM	Reserved for future extension
	PMOD.VERWEIS	Unique record number

1.12.1.7 Personal working time created (PAZ.INSERTED)

The escalation *PAZ.INSERTED* is generated when a Personal working time has been created. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PAZ.INSERTED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PAZ.GLZTMOD	Working time day type on which the personal working time is based
	PAZ.BEZ:GLZTMOD	Name of the personal working time
	PAZ.SCHZART	Shift type
	PAZ.DATB	Start date
	PAZ.DATE	End date

	PAZ.GUELT	V=The Personal working time is completely in the past H=The Personal working time is valid on the current day or on future days Z=The Personal working time is only valid on future days The validity is identified using the field PAZ.DATE.NORMB.
	PAZ.DATB:NORMB	Start date which refers to the beginning of normal time: If the night shift starts on the day before, this start date and the respective end date are one day earlier.
	PAZ.DATE:NORMB	End date which refers to beginning of normal time
	PAZ.NORMB	Beginning of normal time
	PAZ.NORME	End of normal time
	PAZ.SZ	Target time
	PAZ.STBYB:1	Start of on-call duty 1
	PAZ.STBYE:1	End of on-call duty 1
	PAZ.STBYB:2	Start of on-call duty 2
	PAZ.STBYE:2	End of on-call duty 2
	PAZ.VERWEIS	Unique record number



The start and end times of this escalation are standardized and must be between 0:00 and 23.59. For example, if a night shift starts on the day before, then this shift is configured with the beginning of normal time -2:00 and is output in the escalation with 22:00.

1.12.1.8 Personal working time changed (PAZ.UPDATED)

The escalation *PAZ.UPDATED* is generated when a Personal working time has been changed. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PAZ.UPDATED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person

PNR.BESCHVERH	Employment relationship
PNR.TEL:FIR	Company phone
PNR.EMAIL:FIR	Company e-mail
PNR.VGS:PNR	Personnel number of supervisor
PAZ.GLZTMODV	Previous working time day type on which the personal working time was based.
PAZ.BEZ:GLZTMODV	Previous name of the personal working time
PAZ.GLZTMOD	Working time day type on which the personal working time is based
PAZ.BEZ:GLZTMOD	Name of the personal working time
PAZ.SCHZARTV	Previous shift type
PAZ.SCHZART	Shift type
PAZ.DATB	Start date
PAZ.DATE	End date
PAZ.GUelt	V=The Personal working time is completely in the past H=The Personal working time is valid on the current day or on future days Z=The Personal working time is only valid on future days The validity is identified using the field PAZ.DATE.NORMB.
PAZ.DATB:NORMBV	Previous start date which refers to beginning of normal time
PAZ.DATE:NORMBV	Previous end date which refers to beginning of normal time
PAZ.DATB:NORMB	Start date which refers to the beginning of normal time: If the night shift starts on the day before, this start date and the respective end date are one day earlier.
PAZ.DATE:NORMB	End date which refers to beginning of normal time
PAZ.NORMBV	Previous beginning of normal time
PAZ.NORMEV	Previous end of normal time
PAZ.NORMB	Beginning of normal time
PAZ.NORME	End of normal time
PAZ.SZV	Previous target time
PAZ.SZ	Target time
PAZ.STBYBV:1	Previous start of on-call duty 1
PAZ.STBYEV:1	Previous end of on-call duty 1
PAZ.STBYB:1	Start of on-call duty 1
PAZ.STBYE:1	End of on-call duty 1
PAZ.STBYBV:2	Previous start of on-call duty 2
PAZ.STBYEV:2	Previous end of on-call duty 2
PAZ.STBYB:2	Start of on-call duty 2
PAZ.STBYE:2	End of on-call duty 2
PAZ.VERWEIS	Unique record number



The start and end times of this escalation are standardized and must be between 0:00 and 23:59. For example, if a night shift starts on the day before, then this shift is configured with the

beginning of normal time -2:00 and is output in the escalation with 22:00.



The fields that include the previous value of a field always refer to the value that the field contained before the personal working time has been changed.

1.12.1.9 Personal working time deleted (PAZ.DELETED)

The escalation *PAZ.DELETED* is generated when a Personal working time has been deleted. This escalation can be used to inform the employee on the PZE terminal, for example.

To create the message or define conditions, the following placeholders are available:

Event	Identifiers	Description
PAZ.DELETED	PNR.FIR	Company
	PNR.PNR	Personnel number
	PNR.NAME:PNR	Name
	PNR.PNAME	Last name
	PNR.PVORNAME	First name
	PNR.BER	Area
	PNR.KST	Cost center
	PNR.ABT	Department
	PNR.PKREIS	Employee subgroup
	PNR.TAETIGKEIT	Activity of the person
	PNR.BESCHVERH	Employment relationship
	PNR.TEL:FIR	Company phone
	PNR.EMAIL:FIR	Company e-mail
	PNR.VGS:PNR	Personnel number of supervisor
	PAZ.GLZTMOD	Working time day type on which the personal working time is based
	PAZ.BEZ:GLZTMOD	Name of the personal working time
	PAZ.SCHZART	Shift type
	PAZ.DATB	Start date
	PAZ.DATE	End date
	PAZ.GUOLT	V=The Personal working time was completely in the past H=The Personal working time was valid on the current day or on future days Z=The Personal working time was only valid on future days The validity is identified using the field PAZ.DATE.NORMB.
	PAZ.DATB:NORMB	Start date which refers to the beginning of normal time: If the night shift starts on the day before, this start date and the respective end date are one day earlier.
	PAZ.DATE:NORMB	End date which refers to beginning of normal time

	PAZ.NORMB	Beginning of normal time
	PAZ.NORME	End of normal time
	PAZ.SZ	Target time
	PAZ.STBYB:1	Start of on-call duty 1
	PAZ.STBYE:1	End of on-call duty 1
	PAZ.STBYB:2	Start of on-call duty 2
	PAZ.STBYE:2	End of on-call duty 2
	PAZ.VERWEIS	Unique record number



The start and end times of this escalation are standardized and must be between 0:00 and 23:59. For example, if a night shift starts on the day before, then this shift is configured with the beginning of normal time -2:00 and is output in the escalation with 22:00.