

Migrating IP Phones from Unified Communications Manager to Webex Calling Multi-Tenant

cisco Live !

Joe Martini, CCIE #35601
Customer Delivery Engineering Technical Leader

Webex App


Questions?

Use Webex App to chat with the speaker after the session

How

- 1 Find this session in the Cisco Events App
- 2 Click “Join the Discussion”
- 3 Install the Webex App or go directly to the Webex space
- 4 Enter messages/questions in the Webex space

Webex spaces will be moderated by the speaker until February 27, 2026.

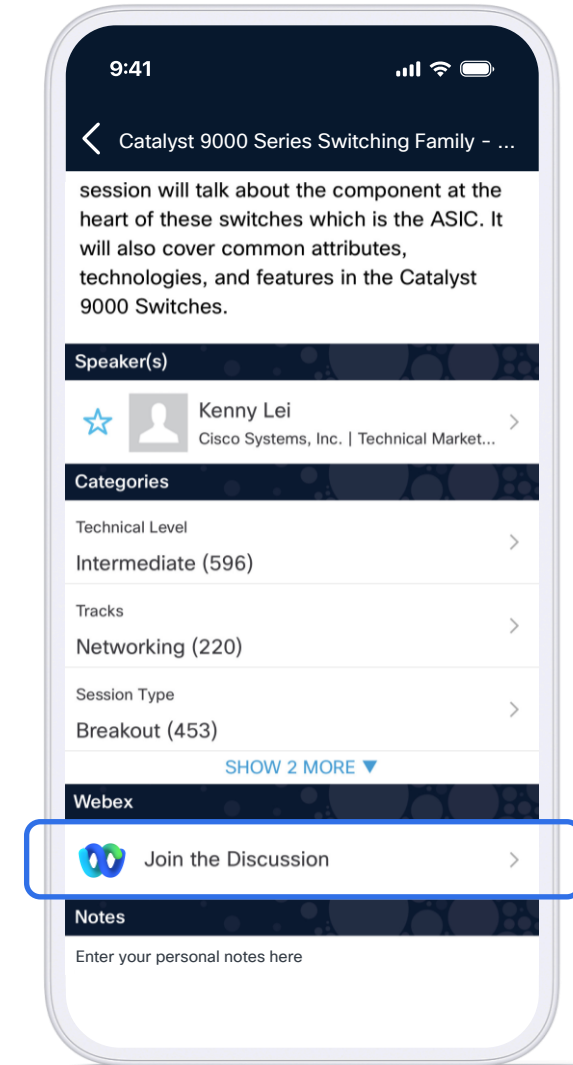

Welcome

Enter activation code

Provide the migration license.

Continue



Settings

Agenda

- 01 What is a Phone Migration**
- 02 Phone Eligibility**
- 03 Migration Licensing**
- 04 Firmware Conversion**

What is a Phone Migration

Cisco 7800 Series IP Phones




Cisco 8800 Series IP Phones



What Is a Phone Migration – 7800 & 8800


Phone migrations are for people who already have existing phones

Enterprise Phone Firmware (ENT)

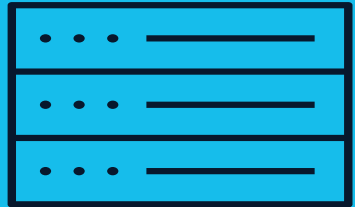

Webex Calling
Dedicated Instance (DI)

Cisco Unified
Communications
Manager (CUCM)




CP-78XX-K9
CP-88XX-K9

Multiplatform Phone Firmware (MPP)



Webex Calling
Multi-Tenant
(WxC MT)



CP-78XX-3PCC-K9
CP-88XX-3PCC-K9

Migrate

7800 & 8800 Series Phone Migration

Enterprise Firmware

Alice Smith
4085264000

Jun 7 3:06 PM

↶

Alice Smith

↶

Eric Schultz

↶

Sam Stevenson

↶

Jim Goldberg

↶

Ranjani Gupta

Tony Lee

↶

Emma Winston

↶

Robert Brown

↶

Amy Patel

↶

Daniel Miller

↶


Redial

New call

Forward all

7800 & 8800 Series Phone Migration

Enterprise Firmware

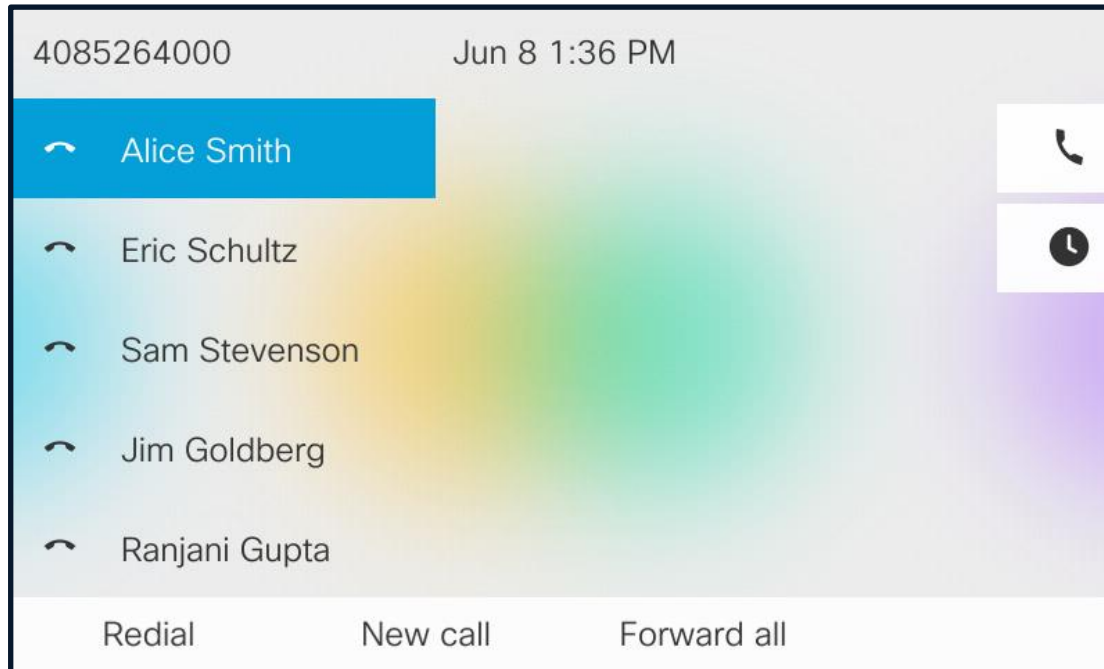

7800 & 8800 Series Phone Migration

Enterprise Firmware

Alice Smith
4085264000

Jun 7 3:06 PM

↶

Alice Smith

↶

Eric Schultz

↶

Sam Stevenson

↶

Jim Goldberg

↶

Ranjani Gupta

Tony Lee

↶

Emma Winston

↶

Robert Brown

↶

Amy Patel

↶

Daniel Miller

↶

Redial

New call

Forward all

7800 & 8800 Series Phone Migration

Enterprise Firmware

Alice Smith
4085264000

Jun 7 3:06 PM

📞

Alice Smith

📞

Eric Schultz

📞

Sam Stevenson

📞

Jim Goldberg

📞

Ranjani Gupta

📞

Tony Lee

📞

Emma Winston

📞

Robert Brown

📞

Amy Patel

📞

Daniel Miller

Redial

New call

Forward all

Multiplatform Firmware

+19199992684

Jun 08 4:12 PM

📞

Alice Smith

📞

Eric Schultz

📞

Sam Stevenson

📞

Jim Goldberg

📞

Rajani Gupta

📞

Tony Lee

📞

Emma Winston

📞

Robert Brown

📞

Amy Patel

📞

Daniel Miller

Redial

New call

Forward

⋮

7800 & 8800 Series Phone Migration

Enterprise Firmware

Alice Smith
4085264000

Jun 7 3:06 PM

Alice Smith

Eric Schultz

Sam Stevenson

Jim Goldberg

Ranjani Gupta

Tony Lee

Emma Winston

Robert Brown

Amy Patel

Daniel Miller

Redial

New call

Forward all

Multiplatform Firmware

+19199992684

Jun 08 4:12 PM

Alice Smith

Eric Schultz

Sam Stevenson

Jim Goldberg

Rajani Gupta

Tony Lee

Emma Winston

Robert Brown

Amy Patel

Daniel Miller

Redial

New call

Forward

CP-8851-K9

7800 & 8800 Series Phone Migration

Enterprise Firmware

Alice Smith
4085264000

Jun 7 3:06 PM

Alice Smith	Tony Lee
Eric Schultz	Emma Winston
Sam Stevenson	Robert Brown
Jim Goldberg	Amy Patel
Ranjani Gupta	Daniel Miller

Redial

New call

Forward all

CP-8851-K9

Multiplatform Firmware

+19199992684

Jun 08 4:12 PM

Alice Smith	Tony Lee
Eric Schultz	Emma Winston
Sam Stevenson	Robert Brown
Jim Goldberg	Amy Patel
Rajani Gupta	Daniel Miller

Redial

New call

Forward

CP-8851-3PCC-K9

What about the 9800s?

7800 / 8800




ENT



MPP

8875 / 9800

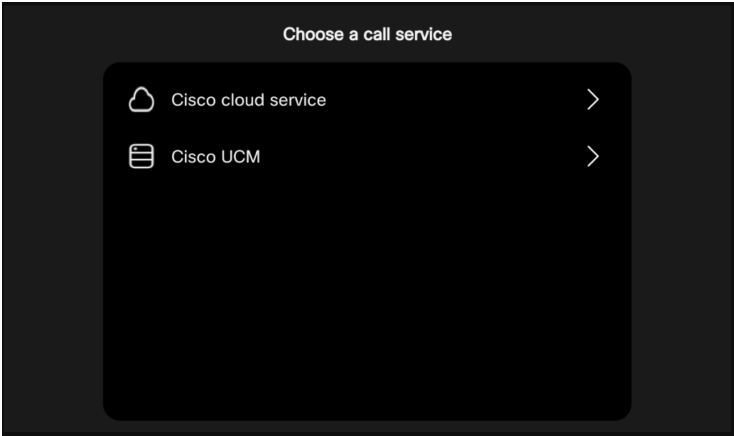




7800 and 8800 Series (except 8875)

8875 and 9800 Series

Firmware	Multiplatform Firmware (MPP) Enterprise Firmware (ENT)	PhoneOS
Firmware Conversion	Yes	No
Product ID (PID)	CP-78XX-3PCC-K9 CP-88XX-3PCC-K9 CP-78XX-K9 CP-88XX-K9	CP-8875-K9 DP-98XX-K9
Migration License Required	Yes	No

Migrating 8875/9800s from UCM to WxC MT

Factory
Reset

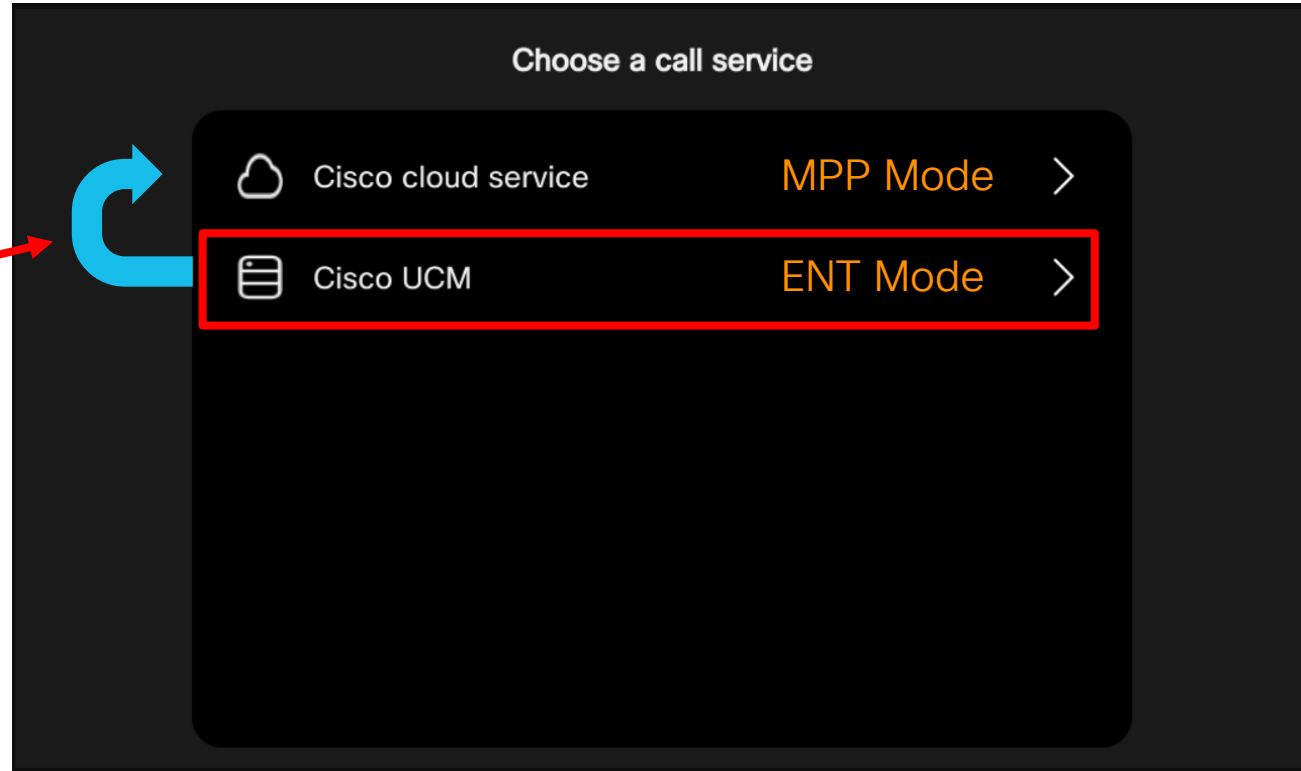

Remote Factory Reset from UCM

☒ Perform Factory Reset

- Individually per device
- Bulk Administration Tool (BAT)
- Set in the phone's TFTP configuration file
- Preserves UCM config (device not deleted)
- Possible reboot loop when set if phone is not cloud provisioned

Phone Eligibility

7800 & 8800 Series

Which Phones can Migrate?



Supported Phone Models for Migration

7800 Series (* limitations apply)	8800 Audio series	8800 Video series
CP-7811-K9=	CP-8811-K9=	CP-8845-K9=
CP-7821-K9= *(V03 or later)	CP-8841-K9=	CP-8865-K9=
CP-7841-K9= *(V04 or later)	CP-8851-K9=	
CP-7861-K9= *(V03 or later)	CP-8861-K9=	
CP-7832-K9=	CP-8832-K9=	

Recommended - FN74296

Some older Cisco 8800 Series phones may experience reduced performance or a degraded user experience after migrating to MPP firmware.

8845/8865 End of Life

7800 Series (* limitations apply)	8800 Audio series (** recommended)	8800 Video series (** recommended)
CP-7811-K9=	CP-8811-K9= ** (V15 or later)	CP-8845-K9= ** (none)
CP-7821-K9= *(V03 or later)	CP-8841-K9= ** (V15 or later)	CP-8865-K9= ** (none)
CP-7841-K9= *(V04 or later)	CP-8851-K9= ** (V15 or later)	
CP-7861-K9= *(V03 or later)	CP-8861-K9= ** (V15 or later)	
CP-7832-K9=	CP-8832-K9= ** (V15 or later)	

The Sticker

7800 Series (* limitations apply)

CP-7811-K9=

CP-7821-K9= *(V03 or later)

CP-7841-K9= *(V04 or later)

CP-7861-K9= *(V03 or later)

CP-7832-K9=





Cisco Unified CM Administration

For Cisco Unified Communications Solutions

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ **Device ▾** Application ▾ User Management ▾

CTI Route Point

Gatekeeper

Gateway

Phone

Trunk

Remote Destination

Device Settings ▶

Cisco Unified CM Administration

System version: 15.0.1.13901-2

VMware Installation: 8 vCPU Intel(R) Xeon(R) CPU E5-2680 v4 @ 2.5GHz

Web Access*

Enabled



Phone Type

Product Type: Cisco 8851


Device Protocol: SIP

Real-time Device Status

Registration: Registered with Cisco Unified Communications Manager

IPv4 Address: [192.168.1.133](#)

Active Load ID: sip88xx.14-2-1-0001-14

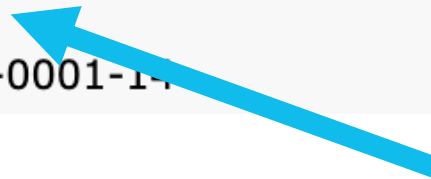



Device information

Cisco IP Phone CP-8851 (SEPB000B4BA1DFA)

[Device information](#)

[Network setup](#)

Network statistics

[Ethernet information](#)

[Access](#)

[Network](#)

Device logs

[Console logs](#)

[Core dumps](#)

[Status messages](#)

[Debug display](#)

Streaming statistics

[Stream 1](#)

[Stream 2](#)

[Stream 3](#)

[Stream 4](#)

[Stream 5](#)

Service mode	On-premise
Service domain	
Service state	Idle
MAC address	B000B4BA1DFA
Host name	SEPB000B4BA1DFA
Phone DN	1003
App load ID	rootfs88xx.14-2-1-0001-14
Boot load ID	sb288xx.BE-01-028
Version	sip88xx.14-2-1-0001-14
Key expansion module 1	
Key expansion module 2	
Hardware revision	V01
Serial number	FCH18219LDW
Model number	CP-8851
Message waiting	No
UDI	phone Cisco IP Phone 8851, Global CP-8851 V01 FCH18219LDW

Wrong!

Hardware Version





Unified Communications Manager Information

☐ Enable Phone Web Access Temporarily (for best results)

☒ Check 7800 series phones

☒ Check 8800 series phones

Submit



Multiplatform Phone (MPP) Firmware Readiness

Download to CSV

Search:

Ready: 0 | Not Ready: 0 | Unknown: 0 | Total: 14

- 1 Not recommended due to hardware version (please see field notice [FN74296](#) for more information)

2 End of Support (please see field notice [FN74296](#) for more information)

3 Possibly not recommended (please see field notice [FN74296](#) for more information)

Device Name	Device Pool	Phone Model	Firmware	Description	IP Address	Serial	HW Ver	MPP Capable
SEP2834A2829D7D	Default	Cisco 8861	sip88xx.14-4-1-0001-36	Auto 1501	10.82.3.47	FCH18219QMN	V01	Yes ¹
SEP2C3124CDB4BF	Default	Cisco 8865	sip8845_65.14-4-1-0001-36	Auto 1510	10.82.3.91	PUC21398MR2	V04	Yes ²
SEPF8B7E29432D1	Default	Cisco 8865	sip8845_65.14-4-1-0001-36	Auto 1508	10.82.3.38	unknown	unknown	Yes ²
SEPF8B7E2943328	Default	Cisco 8851	sip88xx.14-4-1-0001-36	Auto 1506	10.82.3.90	unknown	unknown	Yes ³
SEP3C08F67A916D	Default	Cisco 7841	sip78xx.14-4-1-0001-36	Auto 1502	10.82.3.31	WZP1750049G	V01	No

https://github.com/joemar2/mpp_readiness_check



Control Hub Eligibility Check

Verify Device Migration Eligibility

Ensure all devices are eligible to be migrated to Webex Calling. All devices with an unknown migration eligibility status may succeed or fail when firmware migration is attempted. See [Firmware migration \(Overview\)](#) to manually verify the device migration eligibility.

Total Devices	Eligible Devices	Ineligible Devices	Devices with Unknown Eligibility
5	3	1	1
	These are ready to be migrated	These cannot be migrated	These devices may be unsuccessful

All[Eligibility]

5 devices

Download

Name	Type	Location	DID	Webex Extension	Model	MAC Address	Eligibility
admin@joemar2.webexsa...		HQ			Cisco 7821	5067AE206398	Ineligible
joe@joemar2.webexsand...		HQ			Cisco 8851	B000B4BA1DFA	Eligible
Lobby		HQ		3002	Cisco 8865	4C5D3CF28FBF	Unknown
smith@joemar2.webexsa...		HQ			Cisco 7841	701F5384ABCD	Eligible
user@joemar2.webexsan...		HQ			Cisco 8851	B000B4BA216E	Eligible



Migration Insights

SERVICES

Updates & Migrations

Messaging

Meeting

Calling

PSTN & Routing

Vidcast

Events

Connected UC

Migration utilities

User/contact synchronization

Synchronization of endusers and organizational contacts from Unified CM to Webex.

Get started

Migration Insights

- Plan your move to cloud effectively
- Gain insight into the on-premises features

Get Started

Migrate features from UCM

- Transform data from UCM
- Provision into Webex Calling

Get Started


DeviceEligibility.csv

Device Name	Model	Device VID	DNs	E.164	Eligibility	Notes
SEP00562B05421A	Cisco 8861	4	1031 1040	1031	Eligible*	Upgrade Advised, See Field Notice FN74296
SEP0CD5D39E9CC9	Cisco 9841		1027	1027	Eligible	
SEP4C5D3CF28FB8	Cisco 8865	13	1012	1012	Eligible*	Upgrade Advised, See Field Notice FN74296
SEP64A0E7157C51	Cisco 7965		1002 4442	4442	Ineligible	
SEP6C13D53F31AC	Cisco 8861	11	1015	1015	Eligible*	Upgrade Advised, See Field Notice FN74296

Migration Licensing

7800 & 8800 Series

Phone Migration Licensing – Old Way

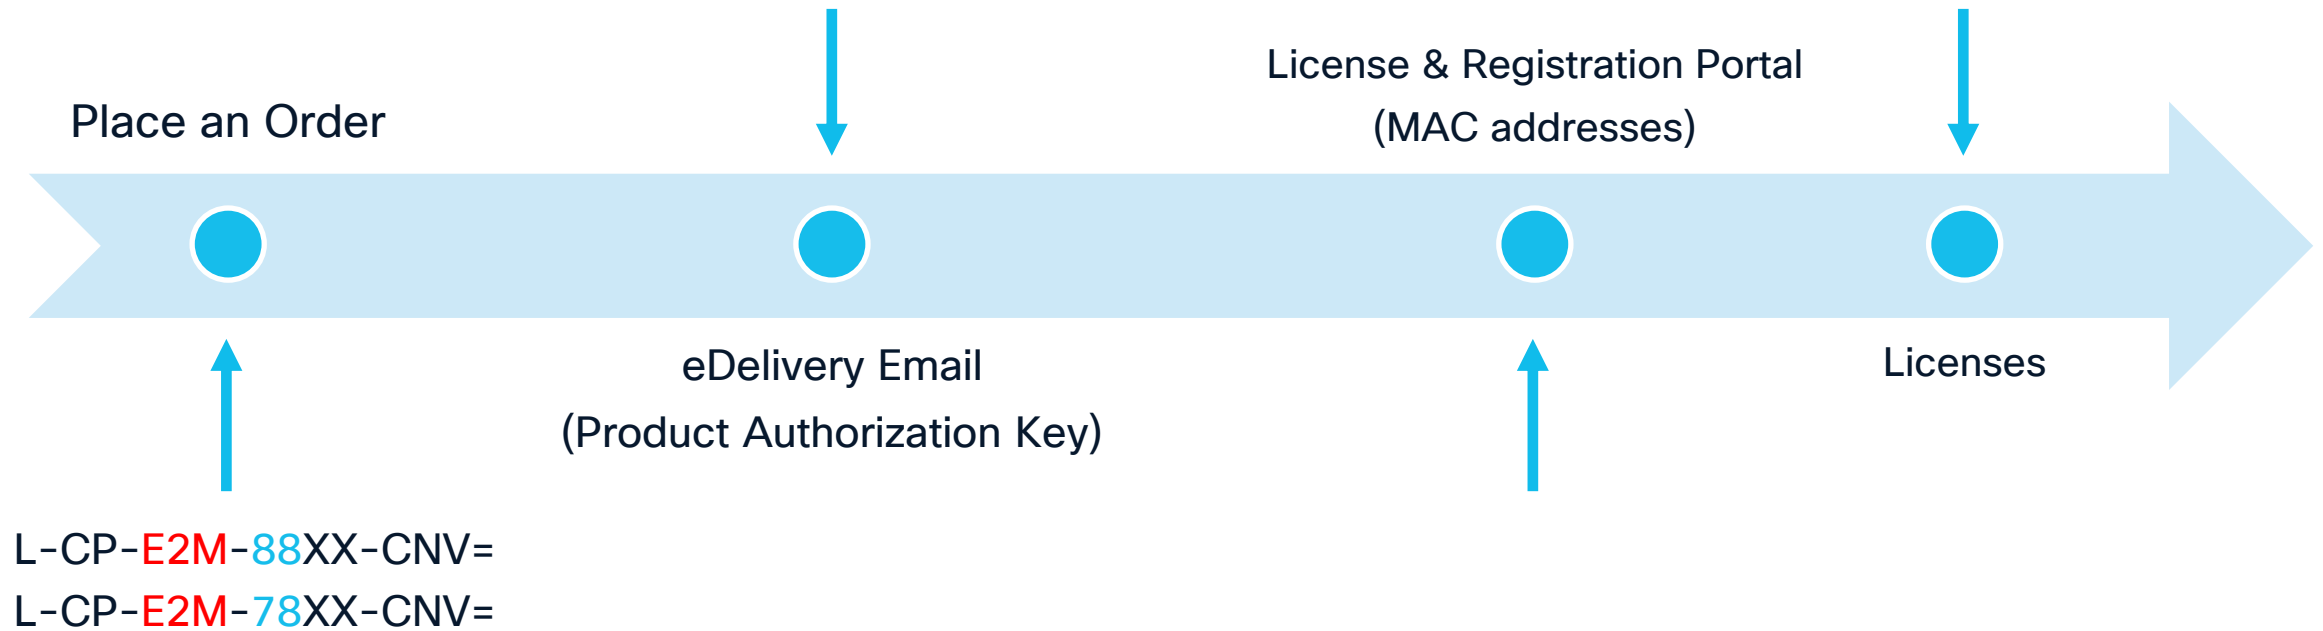

Phone Migration Licensing – New Way

- **Fully automated** when using the Control Hub migration tool
- No additional cost
- Authorized only for use with Webex Calling
- Only required for migrated phones
- Permanent (within Webex Calling)



E2M: Licenses authorize registration

Org-ID & MAC Address Specific Licenses

lab.example.com




abcd.abcd.abcd




cisco.com



abcd.abcd.abcd



Org-ID & MAC Address Specific License Fix



Migrate Enterprise phones to Multiplatform (MPP) firmware

Convert and assign your Enterprise phones to existing Webex users/workspaces.

Task Name

Give a name to your task. You may use a combination of cluster name, date of creation, user type etc to easily recognize your task.

Cisco Live 2026


Migration option Select between generating a license and adding device or just generating a license.

Generate device license only 

ⓘ Device will not be added to Webex calling.

Before initiating device migration from Unified CM, devices must be configured in Webex calling.

Demo: Migration Task



Migrate Enterprise phones to Multiplatform (MPP) firmware

Convert and assign your Enterprise phones to existing Webex users/workspaces.

Task Name

Give a name to your task. You may use a combination of cluster name, date of creation, user type etc to easily recognize your task.

Cisco Live 2026

Migration option

Select between generating a license and adding device or just generating a license.

Generate device license and add device

Generate device license and add device

Generate device license only



MAC Address Onboarding


- Overview
- Alerts Center

- MONITORING
- Analytics
 - Troubleshooting
 - Reports


- MANAGEMENT
- Users
 - Groups
 - Locations
 - Workspaces
 - Devices**
 - Apps
 - Account
 - Security
 - Organization Settings

Add Device

What kind of device do you want to set up for this user?



Cisco Collaboration device
e.g. Cisco Navigator, Room, Board, and Desk Series device



Cisco IP Phone
e.g. Cisco 8845, 8865, 8800 and Analog Telephone Adapter ports

Select Device

Cisco 8845

How would you like to setup this device?

☐ By Activation Code

☒ By Mac Address

Enter MAC Address

Enter the MAC address of the IP phone you want to add.

ABCDABCDABCD

Back

Save

Devices

Devices

Templates

Settings

Find devices by status, type, and more

Filter by

Online (1)

Expired (0)

Offline (0)


Select one or more devices for bulk actions

☐	Type	Product
☐	Phones	 Cisco 8851
☐	Phones	 Cisco 8851

Customer Device Activation (CDA)

A.K.A
EDOS

MAC Address Onboarding

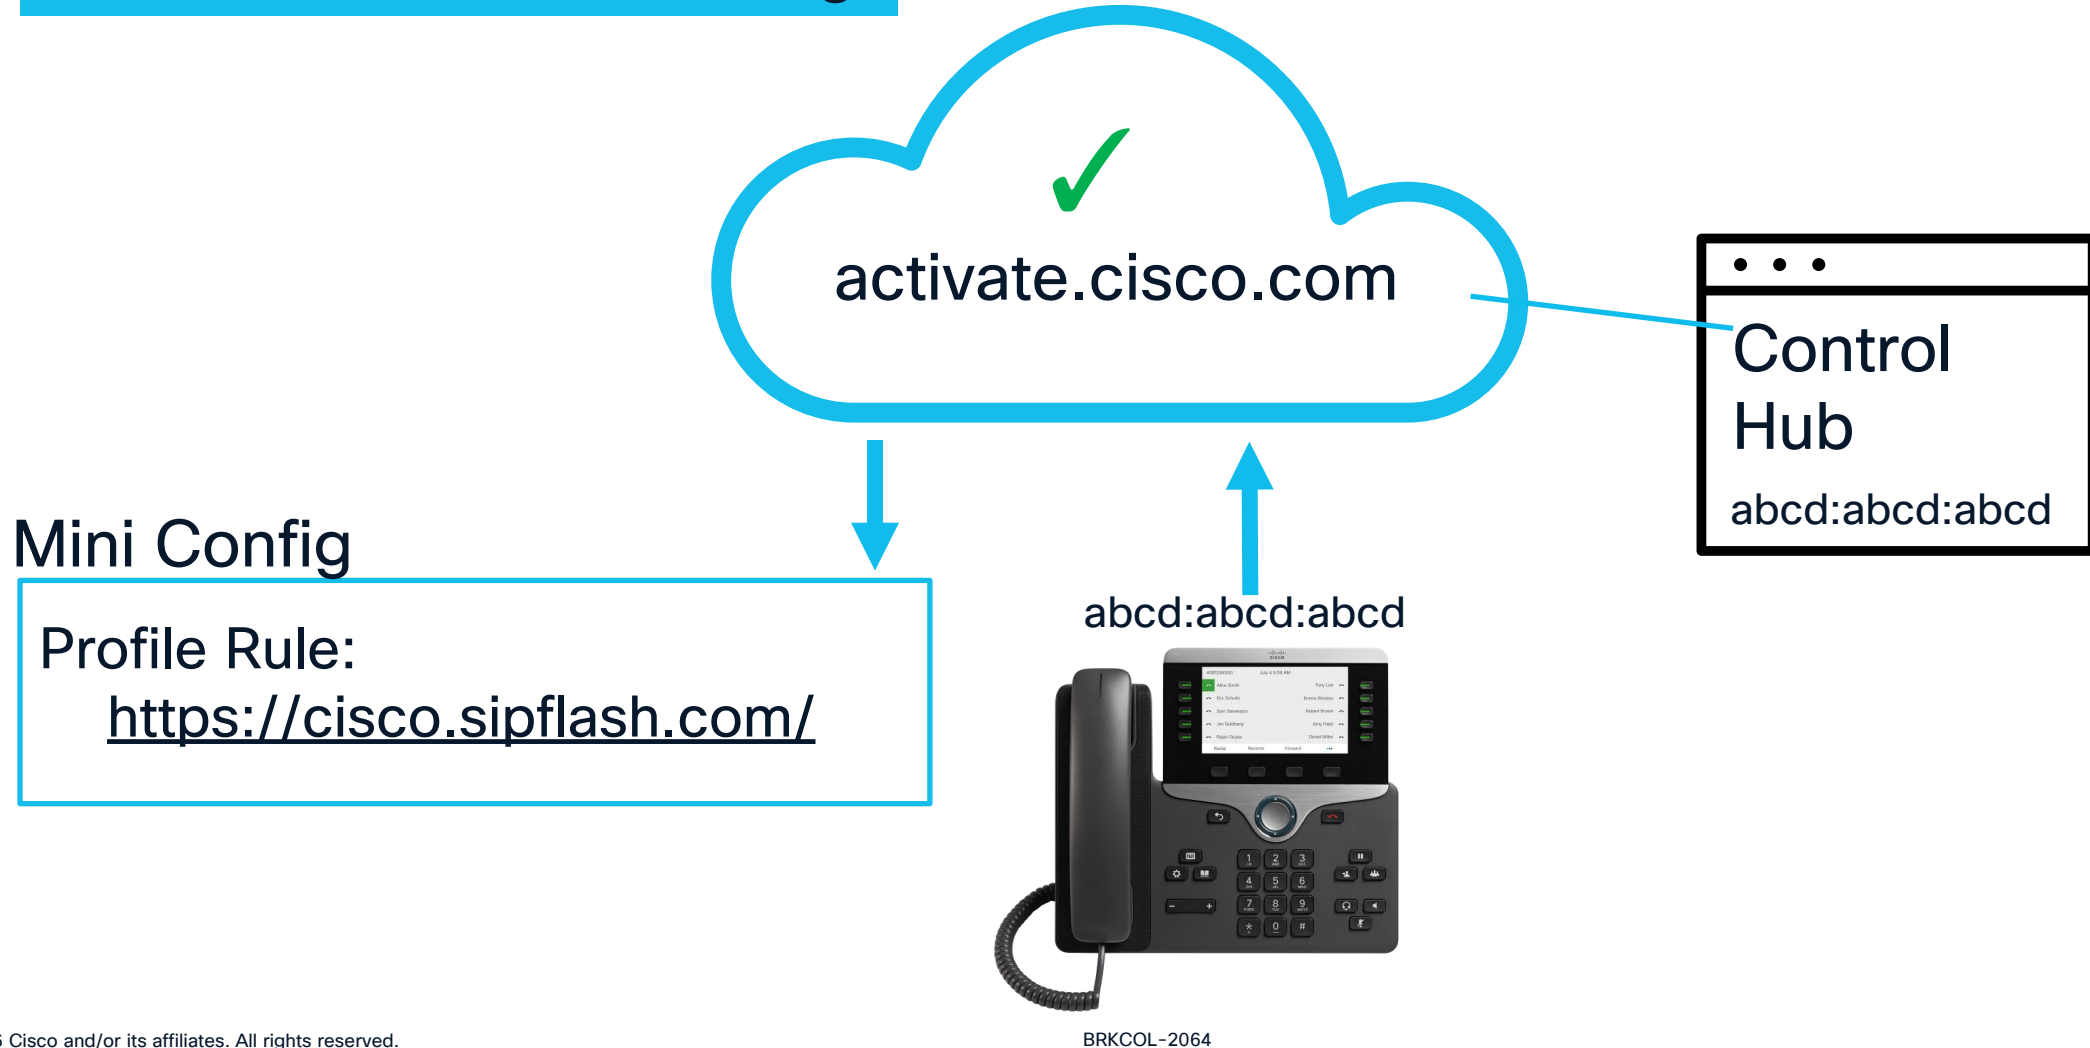



Task Name



Add Devices



Verify Devices

Migrate Enterprise phones to Multiplatform (MPP) firmware

Convert and assign your Enterprise phones to existing Webex users/workspaces.

Task Name

Give a name to your task. You may use a combination of cluster name, date of creation, user type etc to easily recognize your task.

Cisco Live 2026

Migration option

Select between generating a license and adding device or just generating a license.

Generate device license and add device

Generate device license and add device


Generate device license only



Activation Code Onboarding


Add Device

What kind of device do you want to set up for this user?



Cisco Collaboration device

e.g. Cisco Navigator, Room, Board, and Desk Series device



Cisco IP Phone

e.g. Cisco 8841, 8865, 8800 and Analog Telephone Adapter ports

Select Device

Cisco 8851

How would you like to setup this device?

☒ By Activation Code

☐ By Mac Address

Back

Next

5466-8755-9632-7684

Welcome

Enter activation code

Provide the migration license.

Continue



Settings




Expected

Customer Device Activation (CDA)

A.K.A
EDOS

Activation Code Onboarding

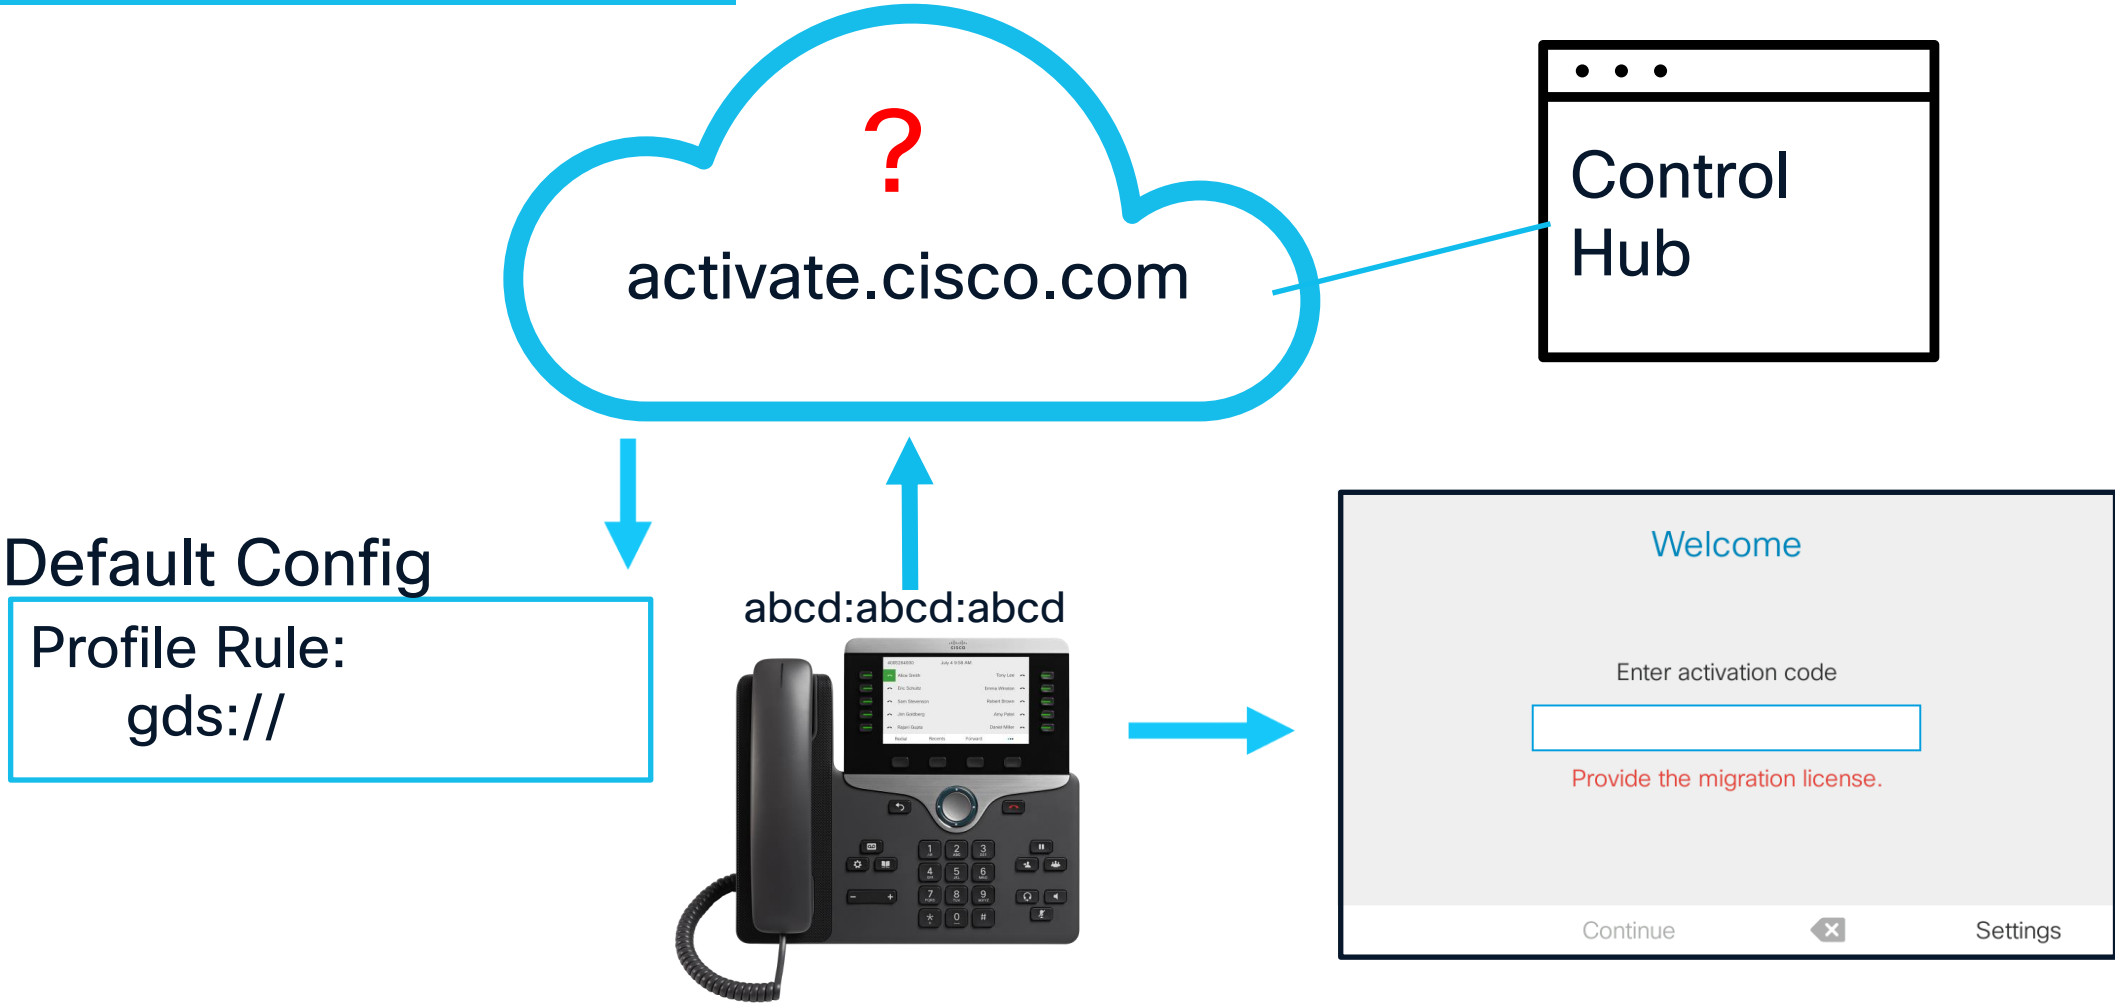

May 30 7:59 AM

May 30 8:00 AM



Your network might require an HTTP proxy to connect to Cisco Service.

Skip

Setup

Ready for Migration

Migrate Enterprise phones to Multiplatform (MPP) firmware

[Learn more](#)

Convert and assign your Enterprise phones to existing Webex users/workspaces



▼ Step 1: Review migration prerequisites (3)

^ Step 2: Firmware migration

Filter by status ▼

50 tasks

Start New Task +

Task name	Last modified	Modified by	Status	Devices	Errors	
Cisco Live 2026	Jan 1, 2026 09:29 AM	Joe M	Ready for migration	3	None	Complete migration +



Firmware Conversion

7800 & 8800 Series

Firmware Conversion

Recommended

14.3.1
or later



12-0-5
or later

Minimum

14.1.1
or later



11-3-5
or later



ENT



MPP

Cloud Upgrader

<https://upgrade.cisco.com>

1. Alternate TFTP
2. Staging Environment
3. UCM Registered Phones

About

Enterprise -> MPP
(For Webex Calling only) ^

Overview

Prepare your environment

Run Migration

Troubleshooting

Enterprise -> MPP
(For BroadWorks/Other 3PCC) ^

Overview

Prepare your environment

Run Migration

Troubleshooting

MPP -> Enterprise

Upgrade DX Android to CE

Upgrade MPP Firmware

Upgrade Accessories

FAQ


Feedback

Enterprise to MPP Firmware Migration for Webex Calling

This service allows customers and partners to perform the migration of CUCM/HCS Enterprise Phones to MPP Phones by upgrading to the different firmware and to enable the calling service by applying the licenses. This page describes the migration procedures specifically for Webex Calling.

After successful migration, your phones will be converted to the MPP firmware version - **12-0-7MPP0001-46**

Overview

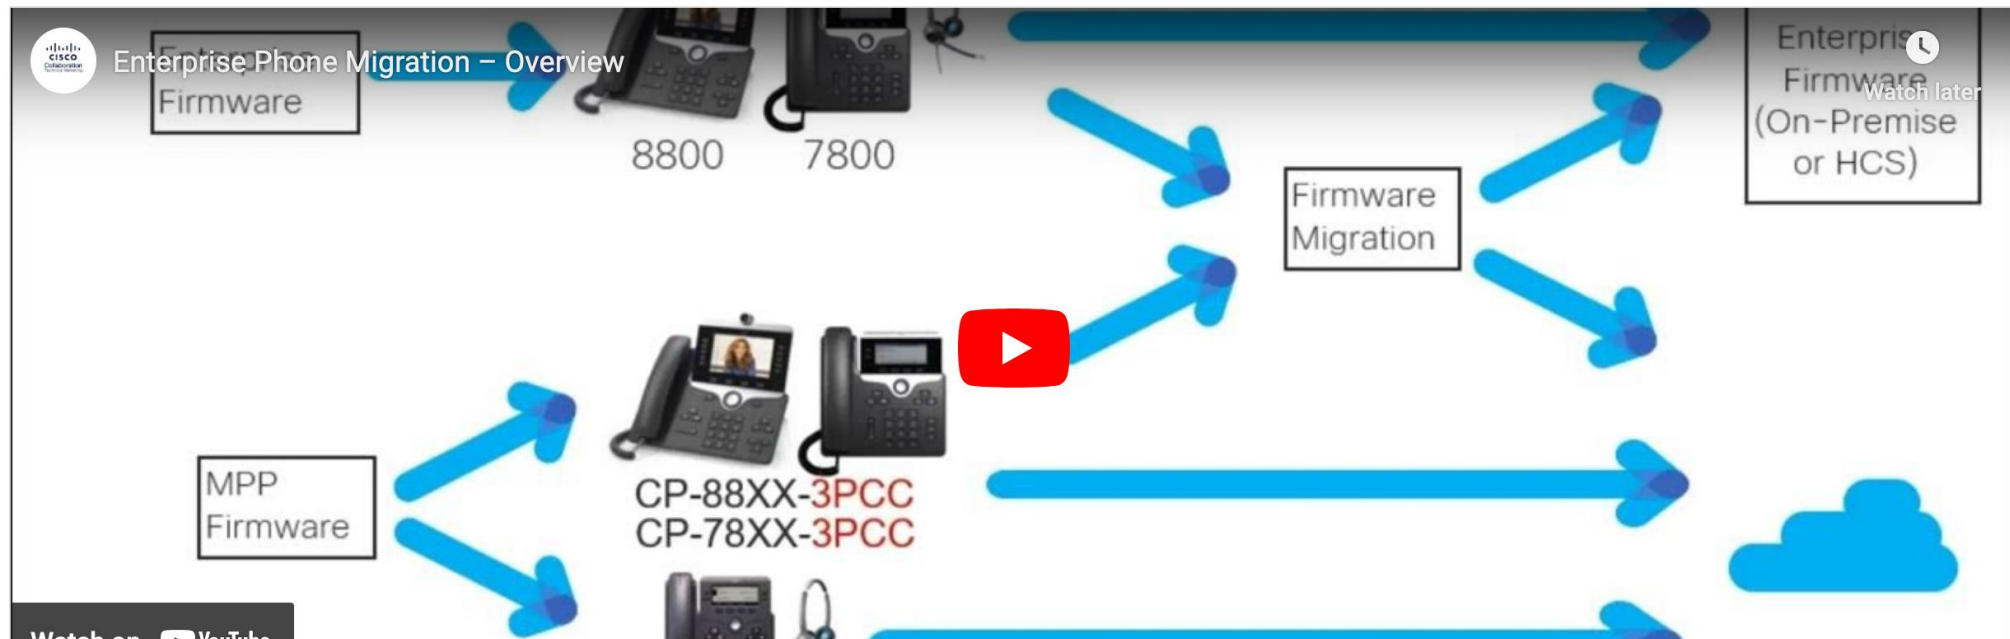

Run Migration

Bulk migration with CUCM (CUCM-registered phones)

Bulk migration with DHCP (Phones' staging facility)

Manual migration (Lab/PoC/Several devices)

Introduction

Task Name: Migrate Enterprise Phones to MPP Firmware in Webex Control Hub - Update

Add Enterprise Devices

Download and edit the CSV template file, and then upload the edited version to add devices. Ensure your enterprise phone firmware version is 12.5(1)SR2 or higher.

Upload

Drag and drop your CSV file here or click to browse

Maximum 1000 devices allowed

Download Template Files

Export user attributes

Download CSV template

If your CSV file contains Unicode characters (e.g. ß, φ, i, ü, ß), import your file in the UTF-8 format. [Learn more](#)

Need help? [Step-by-step instructions](#)

Watch on YouTube

Requirements

- The procedures in migration assistant tool have been completed.
- The model-grouped device text files have been downloaded from migration assistant tool. Refer to [document](#).
- The phones that you intend to migrate, should be registered with CUCM over ethernet connection.

Steps

Step 1 Navigate to CUCM <https://<IP or FQDN>/ccmadmin>

1. Alternate TFTP

Phones **cannot have a trust list** installed!

IPv4 setup

7 DNS server 3

8 Alternate TFTP On

9 TFTP server 1

10 TFTP server 2

11 BOOTP server Off

Exit Apply Revert ✕

IPv4 setup

7 DNS server 3

Trust list installed

 A trust list is installed on this phone. If the new TFTP server is not in the Trust List, changing the TFTP address may not be successful. Press Erase to erase the Trust List. Press Continue to continue applying changes without erasing the Trust List.

Erase Continue


2. Staging Environment

Phones **cannot have a trust list** installed!

```
option 150 ip 3.14.211.49  
option 66 ascii cloudupgrader.webex.com
```



ENT to MPP (E2M) Firmware Conversion

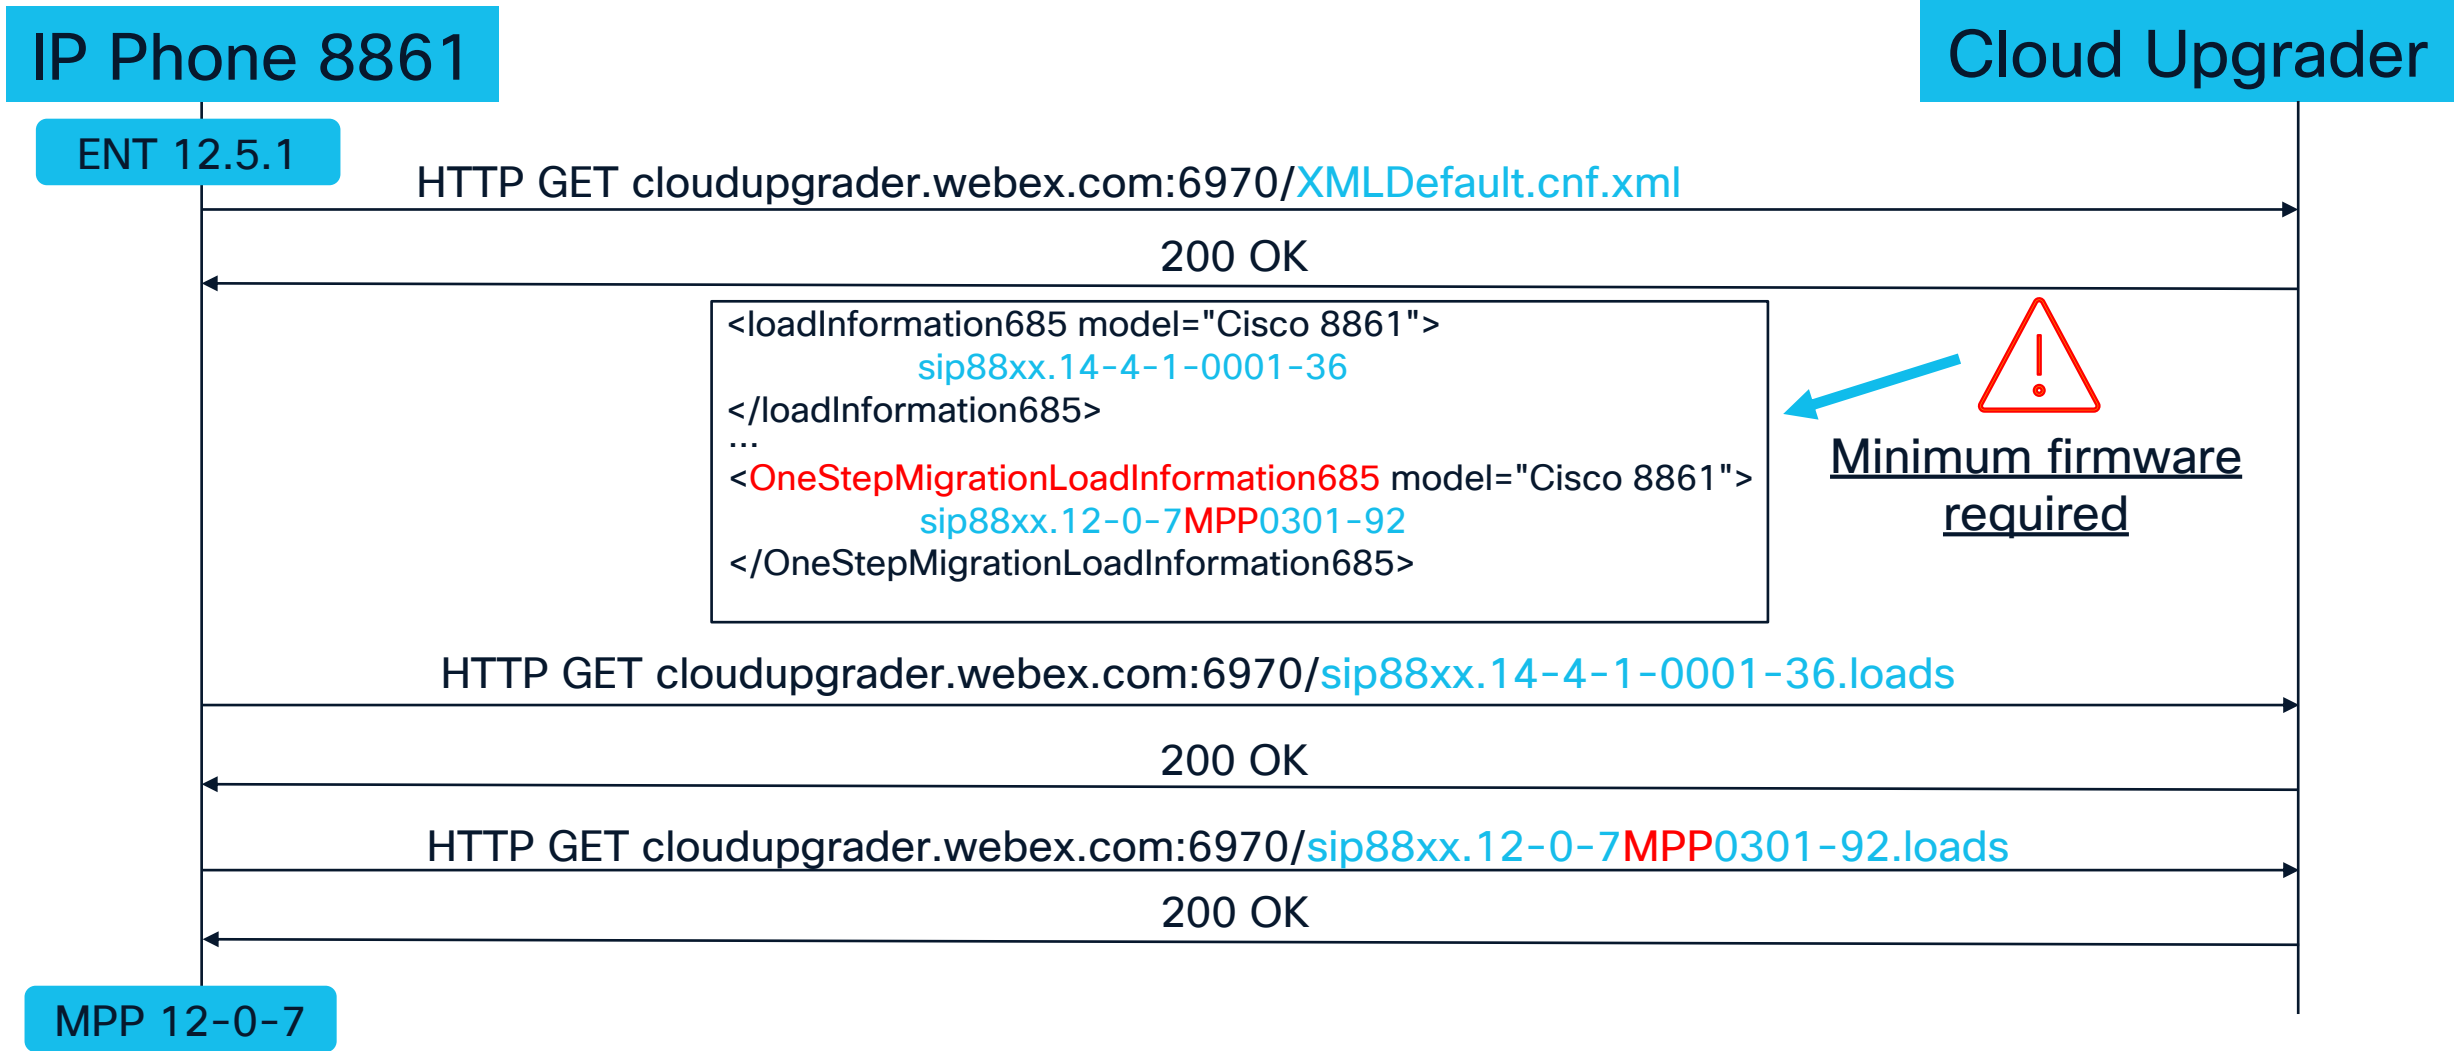

3. UCM Registered Phones

Migrate Enterprise phones to Multiplatform (MPP) firmware

[Learn more](#)

Convert and assign your Enterprise phones to existing Webex users/workspaces



Step 1: Review migration prerequisites (3)

Step 2: Firmware migration

Filter by status ▼

50 tasks

Start New Task +

Task name	Last modified	Modified by	Status	Devices	Errors	
Cisco Live 2026	Jan 1, 2026 09:29 AM	Joe M	Ready for migration	3	None	Complete migration +

Trust List Installed

Firmware Conversion for UCM Registered Phones

Complete phone migration

Select how you would like to proceed with your phone migration. Once started, you may experience downtime in the calling service for the selected phones.

Migration wireless devices or devices without any association to Cisco Unified Communications Manager? [See how to complete migration from the device](#)

Auto Complete

CCUC Required

Phone firmware will automatically migrate to webex. Phones will be migrated in batches of 100.

Manually Complete



Once the task status is ready for migration, manually migrate the phone loads to complete migration to webex calling.


Auto Complete

Phone firmware will automatically migrate to webex. Phones will be migrated in batches of 100.

Manually Complete


Once the task status is ready for migration, manually migrate the phone loads to complete migration to webex calling.

How it works?

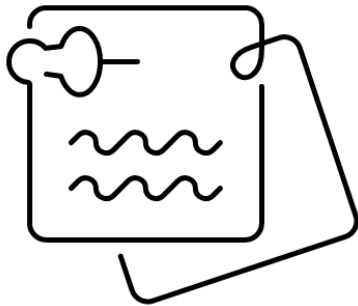


Export ready, download the BAT file export.

[Download Export](#)



Upgrade and connect all phones to the server with a wired connection.

[Manually upgrade phone load](#)

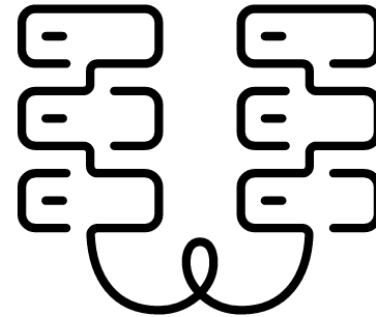

Log into Cisco Unified Communications Manager to

[How to upload files](#)



Cisco Unified CM Administration

For Cisco Unified Communications Solutions

Navigation Cisco Unified CM Administration ▾ Go

administrator |

Search Documentation |

About |

Logout

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾

Bulk Administration ▾

Help ▾

Upload/Download Files

Bulk Administration ▾

Help ▾

Upload/Download Files

Phones ▶

Phone Template

Users ▶

Phone File Format ▶

Phones & Users ▶

Validate Phones

Managers/Assistants ▶

Insert Phones

User Device Profiles ▶

Update Phones ▶

Gateways ▶

Delete Phones ▶

Query

Custom File

Step 1

Phone Load Name

sip88xx.14-4-1-0001-36

Load Server

cloudupgrader.webex.com

☒

Load Server

☐

OR

Cloud Upgrader

About

Enterprise -> MPP
(For Webex Calling only)

Overview

Prepare your environment

Run Migration

Troubleshooting

Step 7

Configure **Load Server** to cloudupgrader.webex.com

☒ Load Server cloudupgrader.webex.com ☒

Step 8

Configure **Phone Load** according to the table below:

Device Type	Phone Load
7832	sip7832.14-4-1-0001-36
Other 78xx	sip78xx.14-4-1-0001-36
8832	sip8832.14-4-1-0001-36
8845/8865	sip8845_65.14-4-1-0001-36
Other 88xx	sip88xx.14-4-1-0001-36

Step 2

Phone Load Name

sip88xx.12-0-7MPP0301-92

Load Server

cloudupgrader.webex.com

✓

OR

Load Server

☐

Peer Firmware Sharing*

Disabled

✓

Cloud Upgrader

About

Enterprise -> MPP
(For Webex Calling only)

Overview

Prepare your environment

Run Migration

Troubleshooting

Step 13 Set **Peer Firmware Sharing** to **Disabled**.

☒ Peer Firmware Sharing*

Disabled

☒

Step 14 Configure **Phone Load** according to the table below:

Device Type	Phone Load
7832	sip7832.12-0-7MPP0301-92
Other 78xx	sip78xx.12-0-7MPP0301-92
8832	sip8832.12-0-7MPP0301-92
8845/8865	sip8845_65.12-0-7MPP0201-66
Other 88xx	sip88xx.12-0-7MPP0301-92

IP Phone 8861 with Multiplatform Firmware

Release 12.0.7

 [My Notifications](#)

Related Links and Documentation

- No related links or documentation -

File Information	Release Date	Size	
Multiplatform Phone Firmware Release: 12.0.7	22-Jan-2025	190.78 MB	  
cmterm-88xx.12-0-7MPP0001-46_REL.zip Advisories 			



Cisco Unified Operating System Administration

For Cisco Unified Communications Solutions

Show ▼

Settings ▼

Security ▼

Software Upgrades ▼

Services ▼

Help ▼

Install/Upgrade

Install/Upgrade Cluster

Reboot Cluster

TFTP File Management



WARNING: No ba

This is required

Restart TFTP Service

Firmware Conversion

Phone Type

Product Type: Cisco 8851

Device Protocol: SIP

Real-time Device Status

Registration: Registered with Cisco Unified Communications Manager

IPv4 Address: [192.168.1.125](#)

Active Load ID: sip88xx.12-5-1SR2-2


Inactive Load ID: sip88xx.11-7-1-17

Download Status: Failed

Requested Load ID: sip88xx.12-0-1MPP0001-245

Download Server: 192.168.1.20

Inactive Load Failure Reason Internal Phone Error

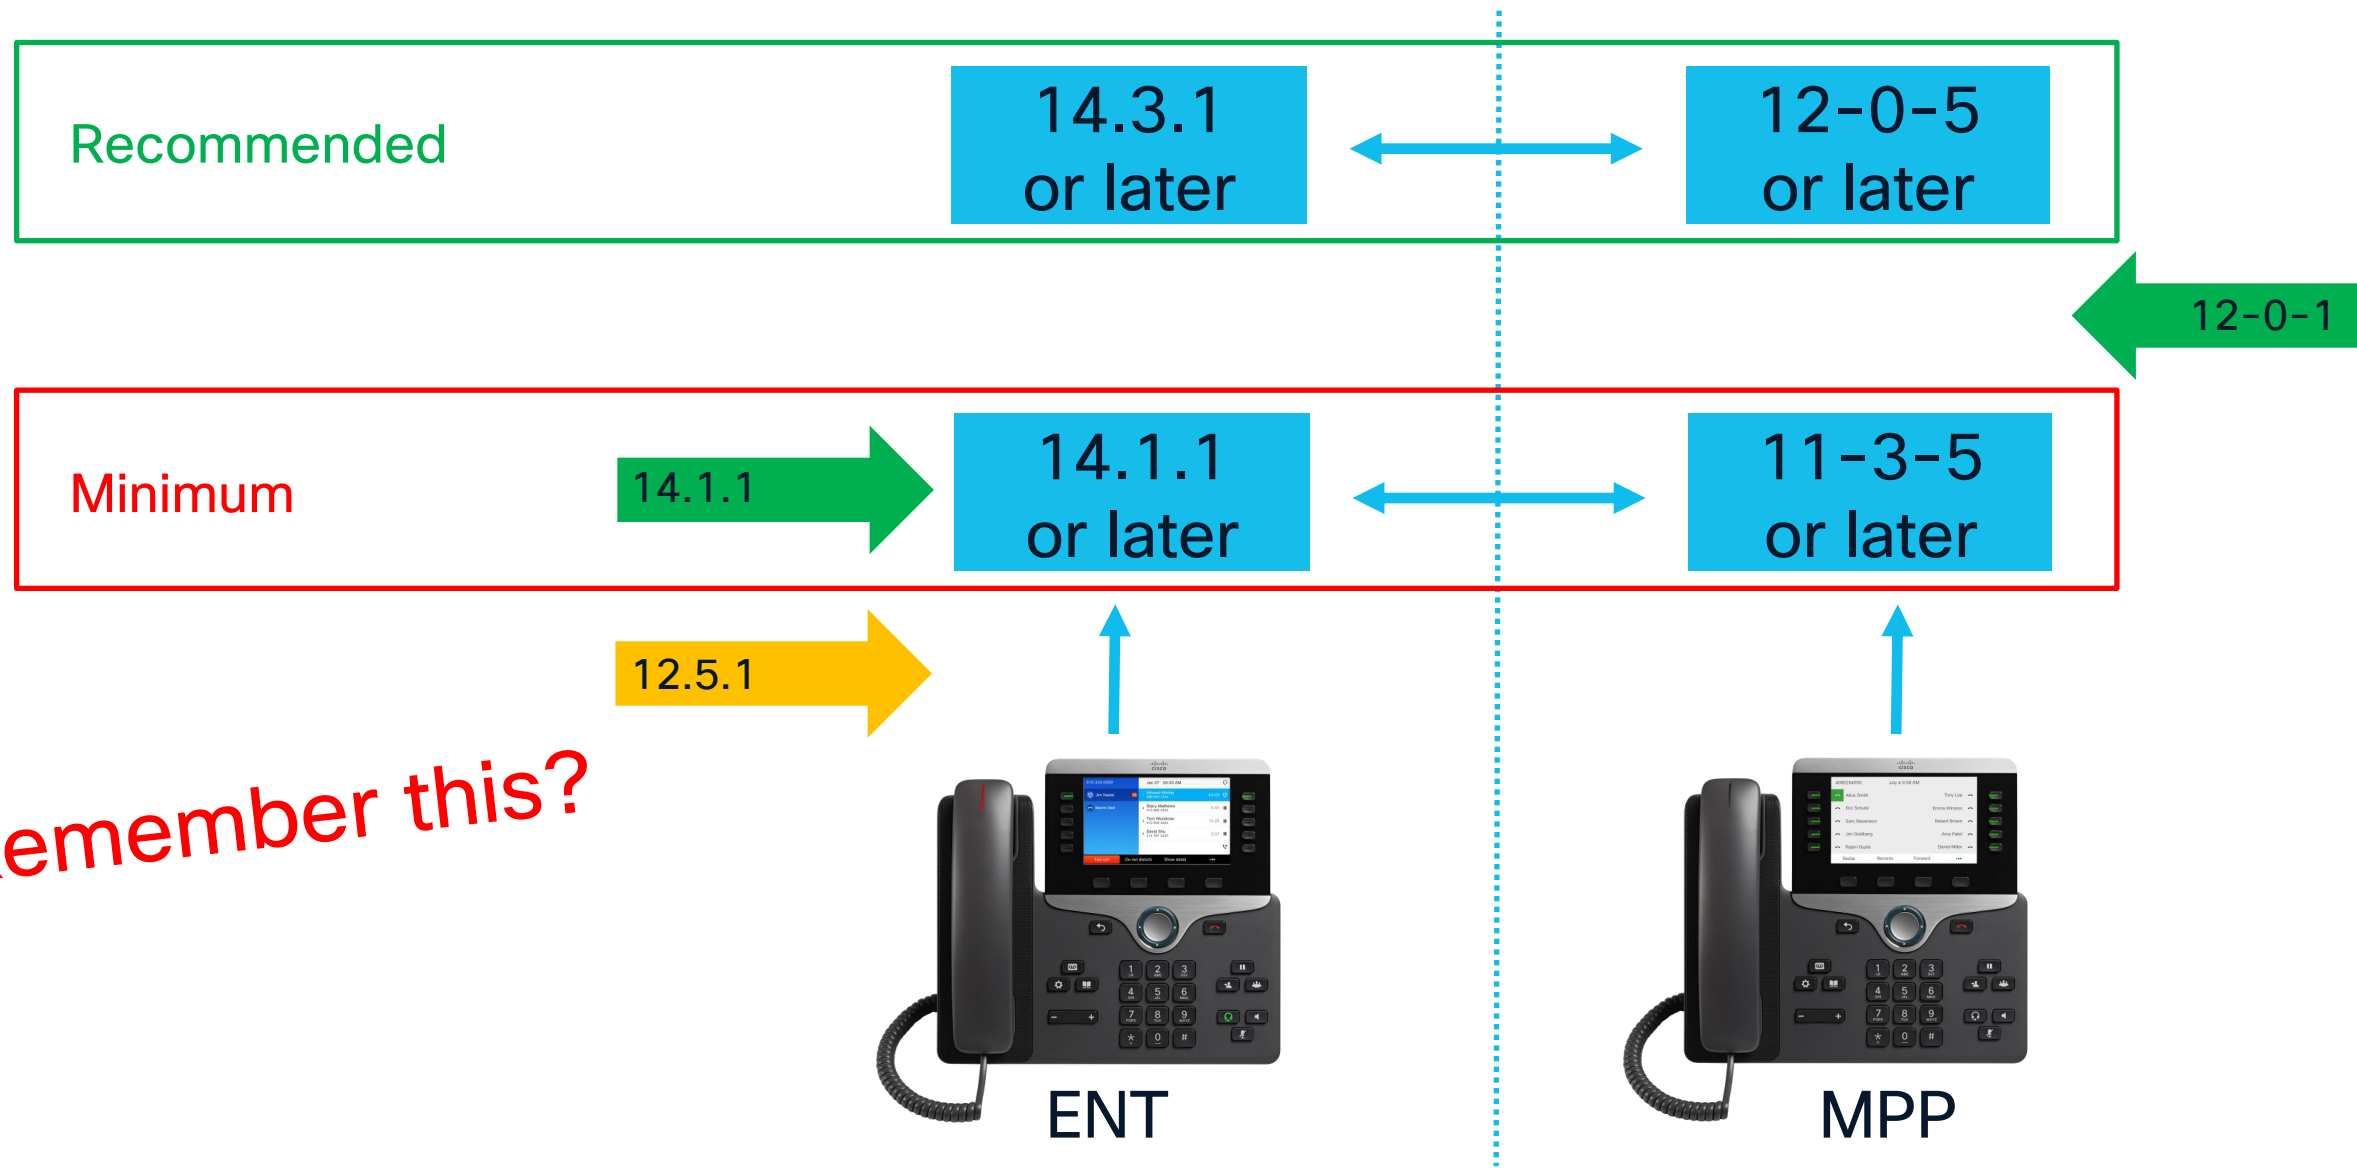

Firmware Conversion

Phones protect themselves

Phone Type	
Product Type:	Cisco 8851
Device Protocol:	SIP
Real-time Device Status	
Registration:	Registered with Cisco Unified Communications Manager
IPv4 Address:	192.168.1.125
Active Load ID:	sip88xx.12-5-1SR2-2
Inactive Load ID:	sip88xx.11-7-1-17
Download Status:	Failed
Requested Load ID:	sip88xx.12-0-1MPP0001-245
Download Server:	192.168.1.20
Inactive Load Failure Reason	<u>Internal Phone Error</u>

Ineligible HW version does this too

Cloud-Connected UC (CCUC)

Cloud-Connected UC

Capabilities and benefits



Global operations view

Get a global view of UCM and UCM Cloud system health and performance.



Simplify certificate management

Reduce overhead in managing device security by more than 80 percent.



Analytics insights

Use the rich analytics dashboard in [Webex Control Hub](#) to gain insights and trends into global utilization and service quality and performance.



Automate upgrades

Receive notifications of service and security updates, with one-touch deployment automation.



Centralized troubleshooting

Accelerate end-to-end troubleshooting processes, from discovery, through diagnostics, to remediation.



Security & Privacy

Organization Settings

SERVICES

Updates & Migrations

Messaging

Meeting

Calling

PSTN & Routing

Vidcast

Connected UC

Hybrid


Connected UC

Cisco Webex

Cloud-Connected UC

Enable Cisco Webex Cloud-Connected Unified Communication and connect your on-premises UC applications (such as UCM and IM&P) to Control Hub.

Enable Connected UC

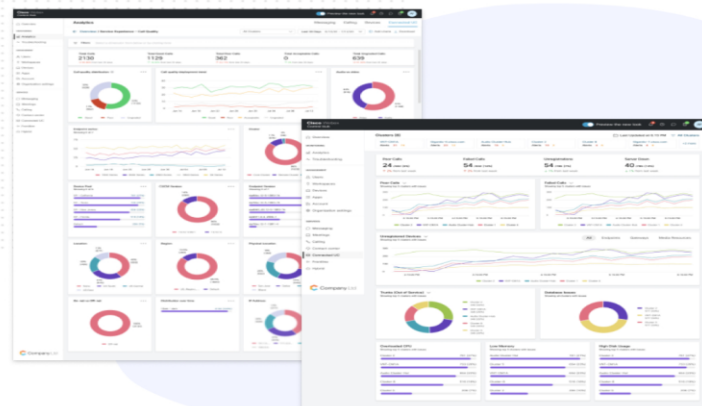

Enhance your deployment
with our services like:

- Deep Insight Analytics
- Deployment Insights and more.

[Learn more](#)

- 🔒

Security & Privacy
- ⚙️

Organization Settings

SERVICES

- 🔄

Updates & Migrations
- 💬

Messaging
- 📅

Meeting
- 📞

Calling
- 📠

PSTN & Routing
- ▶

Vidcast
- 📶

Connected UC
- ☁️

Hybrid

Connected UC

UC Management



Inventory

Agent Install Files

Telemetry Module Invent...

Events History

< UC Management



All 1



Show Cluster Groups

Cluster Group	Description	Status
joemar2	joemar2 RTP	● Online Info

🔒

Security & Privacy

⚙️

Organization Settings

SERVICES

🔄

Updates & Migrations

💬

Messaging

📅

Meeting

☎️

Calling

📞

PSTN & Routing

▶️

Vidcast

📶

Connected UC

☁️

Hybrid

Migrate Enterprise phones to Multiplatform (MPP) firmware

Learn more



Convert and assign your Enterprise phones to existing Webex users/workspaces

▼ Step 1: Review migration prerequisites (3)

^ Step 2: Firmware migration

🔍 Search

Filter by status ▼

50 tasks

Start New Task +

Task name	Last modified	Modified by	Status	Devices	Errors
Cisco Live	Jan 1, 2021 09:29 AM	Joe M	Ready for migration	3	None

Complete migration +

Complete phone migration

Select how you would like to proceed with your phone migration. Once started, you may experience downtime in the calling service for the selected phones. Migration wireless devices or devices without any association to Cisco Unified Communications Manager? [See how to complete migration from the device](#)

Auto Complete

Phone firmware will automatically migrate to webex. Phones will be migrated in batches of 100.

Manually Complete

Once the task status is ready for migration, manually migrate the phone loads to complete migration to webex calling.

Select the Unified CM cluster

Choose the cluster loads where the phone loads are to be migrated from

UCM Cluster

StandAloneCluster - testcucm.... ▾

Select TFTP server type


UCM Based ▾

Migrate Devices



Starts Immediately!

Before you begin



Connect all phones to server with a wired connection.

Control Hub
Cloud-Connected UC
(CCUC)



TFTP Service

Download 14.3.1 ENT
Download 12-0-7 MPP



Running: 12.5.1
Install: 14.3.1
Install: 12-0-7 MPP



Running: 14.3.1
Install: 12-0-7 MPP



Running: 12.5.1
Install: 14.3.1
Install: 12-0-7 MPP

How Do I Know I'm Done?

MANAGEMENT

 Users

 Groups

 Locations

 Workspaces

 **Devices**

☐	Type	Product	Status
☐	Phones	 Cisco 8851	● Online

Device Management

The users and workspaces that appear on this device are displayed below in the order of appearance.

To add and remove users and workspaces, select **Configure Lines**.

To customize the programmable Line Keys, select **Configure Layout**.

To set up the display settings and dialing options, select **Device Settings**.

Line	Name	Number/Extension	Reg.
1	Alice Smith	NA/4050	Registered 

MANAGEMENT

 Users

 Groups

 Locations

 Workspaces

 **Devices**

 Apps

 Account

Devices

 **Devices**

 Templates

 XOD Devices

 Settings

 issues:register



Issues

containing **register**

(0)

SIP not **registered**, Webex services connected

(0)

es (0)

SIP **registered**, Webex services not connected

(0)

MANAGEMENT

 Users

 Groups

 Locations

 Workspaces

 Devices

 Apps

 Account

Devices

 Devices

 Templates

 XOD Devices

 Settings

 Software

 Resources

 Find devices by status, type, and more



3 devices

Filter by

Online (0)

Expired (0)

Offline (0)

Issues (0)

Offline: deep sleep (0)

Status unavailable (3)

Back to Our Story

Not Using Activation Codes

Welcome

Enter activation code

Provide the migration license.

Continue  Settings

Activation Code Screen?

Task name	Last modified	Modified by	Status	Devices	Errors
Add device default task	Apr 25,2023 02:28 PM	Joe M		0	None
license_and_add_device	Apr 24,2023 06:45 PM	Joe M	Ready for migration	200	None

 Devices

☐	Type	Product
☐	Phones	 Cisco 7841
☐	Phones	 Cisco 8865
☐	Phones	 Cisco 8865

What Happened?

Task name	Last modified	Modified by	Status	Devices	Errors
Add device default task	Apr 25,2023 02:28 PM	Joe M		0	None
license_and_add_device	Apr 24,2023 06:45 PM	Joe M	Ready for migration	200	None

Info

Voice

Call History

Personal Directory

Status

Debug Info

Download Status

Network Statistics

Provisioning Status

Provisioning Status 1:[1]04/24/2023 18:38:18[https://activate.cisco.com:443/*]Resync Succeeded

Possible Solution

Welcome

Enter activation code

Provide the migration license.


Continue  Settings

Automation

```
import ipaddress, requests

for ip in ipaddress.IPv4Network('192.168.1.0/24'):
    url = f'http://{ip}/admin/direct-factory-reset'
    requests.get(url)
```

This won't happen anymore!

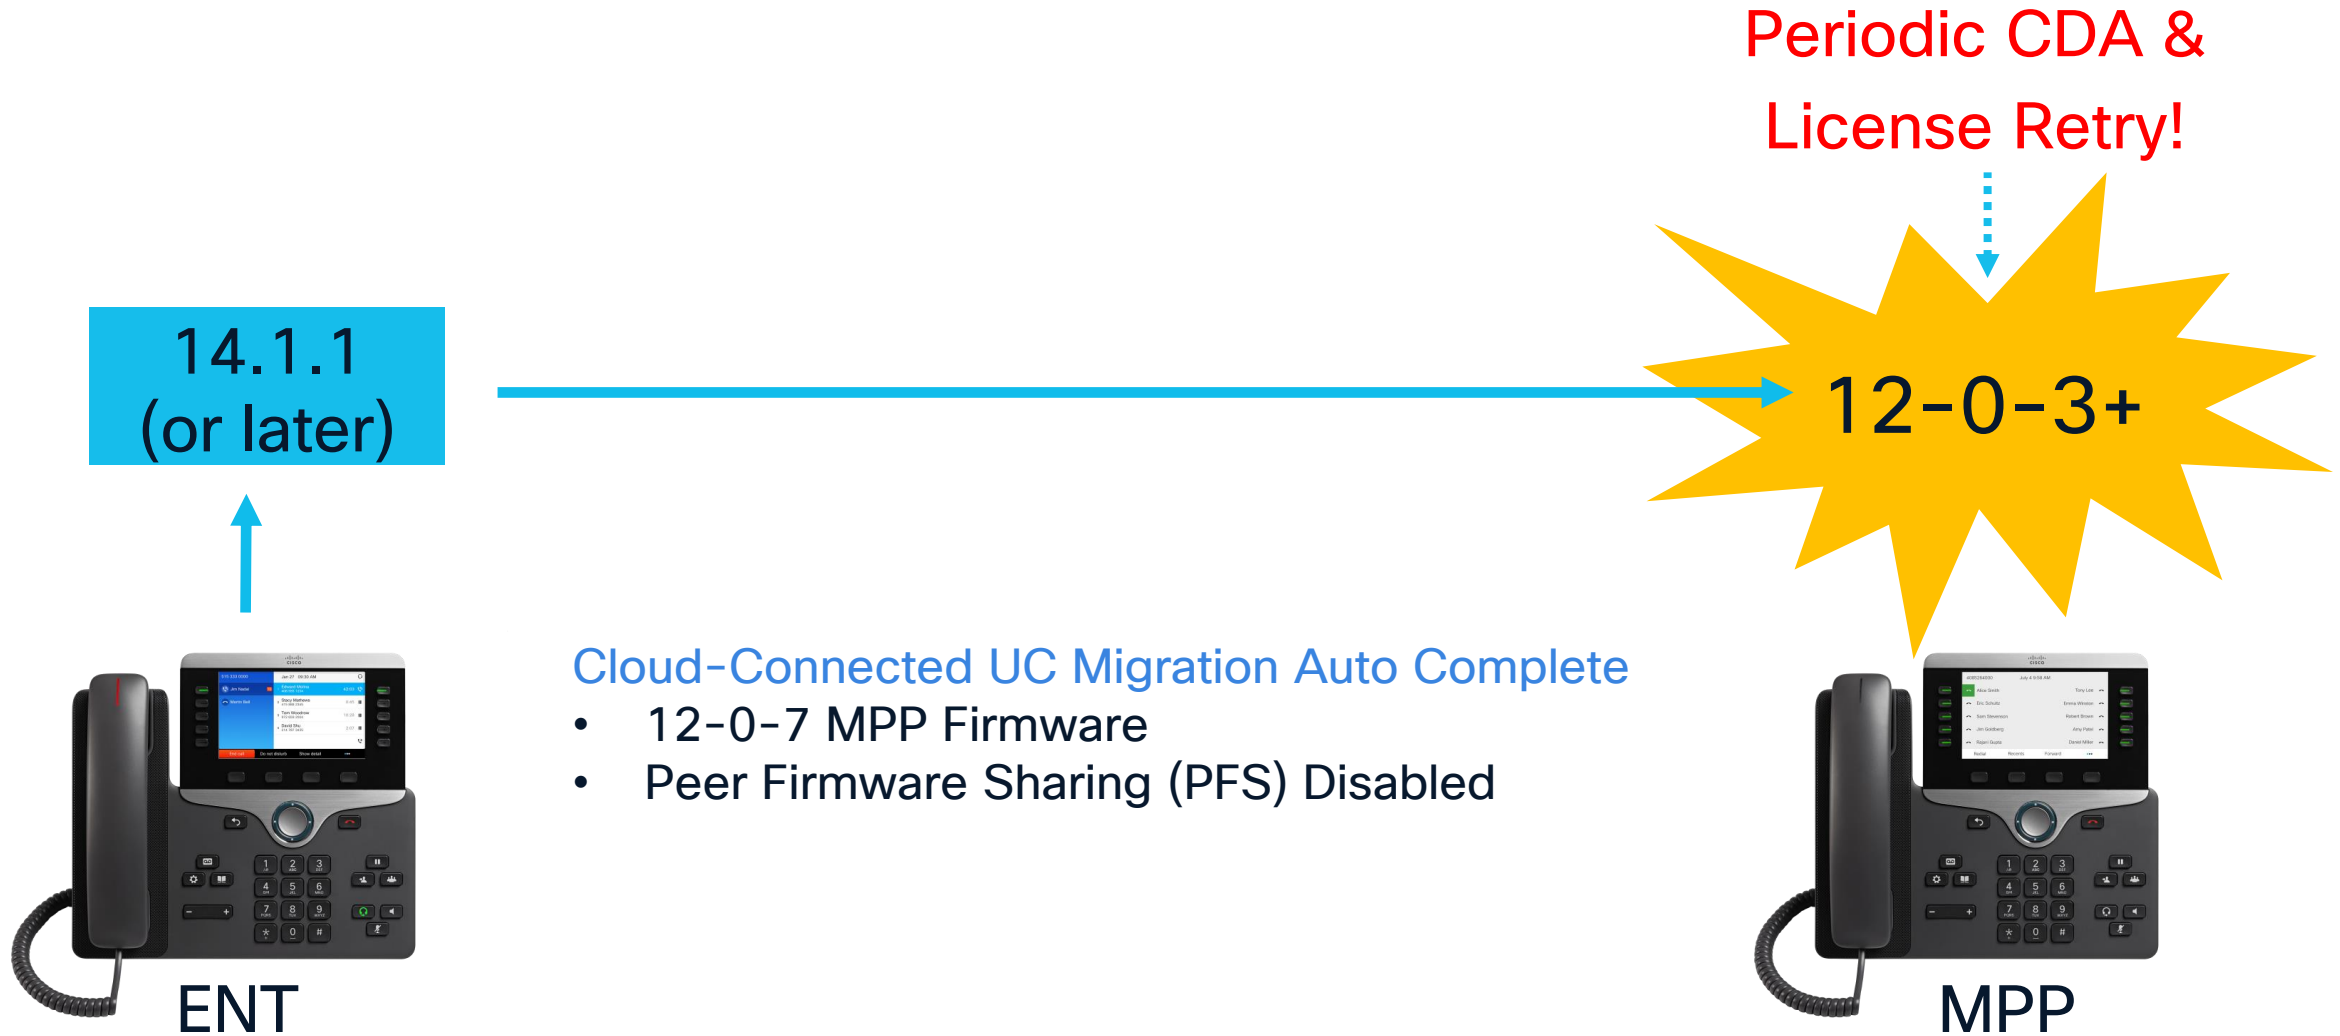


Need Help – Ask Cloud Upgrader!

Webex App

It's a perfect place to ask your questions.

Join the Ask Cloud Upgrader room

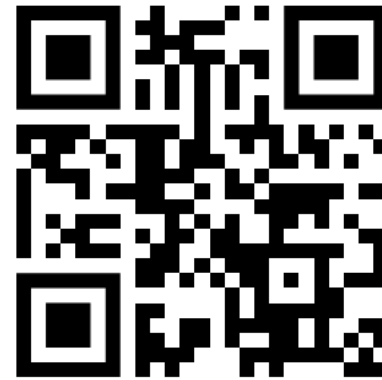

<https://upgrade.cisco.com/contact>

Complete your session surveys



Complete your surveys in the Cisco Events App.



Complete a minimum of 4 session surveys and the overall event survey to receive a unique Cisco Live t-shirt.
(from 11:30 on Thursday, while supplies last)

Continue your education



Visit the Cisco Showcase for related demos



Book your one-on-one Meet the Engineer meeting

Visit the Technical Solutions Clinics to discuss your technical questions



Attend the interactive education with DevNet, Capture the Flag, and Walk-in Labs



Visit the On-Demand Library for more sessions at CiscoLive.com/On-Demand

Contact me at: joemar2@cisco.com

Thank you

CISCO Live !

