

MediaLedger

User Manual

Every page, dialog and setting, with numbered screenshots

Version	Build date	Document date
2.4.0	2026-09-30	2026-10-01

MediaLedger inventories the video files on a network share, tracks what changes between scans, finds what is missing or weak, and keeps your corrections. It runs as a Windows desktop application and as a web server on a Raspberry Pi; both show the same pages.

The screenshots in this manual show a fictional library generated for the purpose. No title, person or address in them is real.

Contents

Contents	2
1. Installing and first launch	5
1.1 System requirements	5
1.2 Installing the desktop application	5
1.3 Installing the web server on a Raspberry Pi	5
1.4 First launch	6
1.4.1 Welcome guide	6
2. The interface	10
2.1 The sidebar in full	11
2.2 The three ways MediaLedger runs	13
2.3 Colour themes	13
3. Library	14
3.1 Dashboard	14
3.2 Dashboard, edit mode	17
3.3 Add a card dialog	18
3.4 Card options dialog	20
3.5 TV Shows	21
3.6 Poster wall view	23
3.7 Poster wall: details card	24
3.8 Series page (episodes)	26
3.9 Movies	27
3.10 Movie page (versions)	28
3.11 Web videos	29
3.12 Adult library	30
4. Review	32
4.1 Missing episodes	32
4.2 Match dialog	35
4.3 Collect dialog	36
4.4 Issues: Problems	37
4.5 Fix dialog	39
4.6 Issues: Duplicates	40
4.7 Quality	42
4.8 Upgrade candidates	43
4.9 Reclaim space	44

4.10 Ratings.....	45
4.11 Watch tonight	47
4.12 Watched.....	48
4.13 Requests.....	50
4.14 Request page for phones	52
5. Maintenance	55
5.1 Change log.....	55
5.2 Movie names.....	56
5.3 Rename TV / anime.....	59
5.4 Rename confirmation dialog.....	61
5.5 CSV export.....	62
6. Application	65
6.1 System.....	65
6.2 Family portal (administration)	66
6.3 Invite created, with its QR code.....	68
6.4 Log.....	69
6.5 Security	70
6.6 Two-factor setup.....	73
6.7 About.....	74
7. Settings.....	76
7.1 Settings: Appearance and Library roots.....	76
7.2 Settings: Network shares (Raspberry Pi server).....	77
7.3 Connect a network share dialog	79
7.4 Settings: Scanning, ffprobe, lookups and folder watch	80
7.5 Settings: Renaming, adult content, quality thresholds and CSV export	82
7.6 Settings: Schedules	84
7.7 Settings: Data, backups and posters	85
7.8 Restore from a backup dialog	87
7.9 Folder browser dialog (web server)	88
7.10 Settings: Updates and notifications	89
7.11 Settings: Plex.....	90
8. The family portal.....	93
8.1 Family portal: Library	93
8.2 Family portal: a series	94
8.3 Family portal: Tonight.....	96
8.4 Family portal: Requests.....	97

8.5 Family portal: Settings	99
8.6 Portal admin: Requests	101
8.7 Portal admin: Invites	102
8.8 Portal admin: Status.....	104
9. Short dialogs	107
9.1 Confirm it is you (password again).....	107
9.2 One at a time	107
9.3 Dry run result	107
9.4 Batch items	107
9.5 Undo batch.....	107
9.6 Rename movie files, live	108
9.7 Movie batch result	108
9.8 Set source for selected.....	108
9.9 Ignore the other files	108
9.10 Card settings (before version 2.0).....	108
10. Common tasks from start to finish	109
10.1 Find and fill the gaps in a series	109
10.2 Tidy the names of a group of episodes	109
10.3 Arrange the Dashboard.....	110
10.4 Give a family member access.....	111
10.5 Back up, and restore	112
10.6 Find out why something did not happen.....	112
11. Settings reference	114
11.1 What is remembered in the browser only.....	117
12. Keyboard shortcuts	118
13. Troubleshooting and frequently asked questions	119
13.1 Every message in one place	119
14. Glossary.....	123

Page numbers are filled in when the document is opened in Word, or when it is exported.

1. Installing and first launch

1.1 System requirements

	Desktop application	Web server
Computer	A 64-bit Windows computer. The installer is built for x64 only.	Raspberry Pi 4B or 5 recommended; a Pi 3 works on a 64-bit system but scans slowly. Any Linux computer with Node 22 also works.
Operating system	Windows 10 or 11, 64-bit.	Raspberry Pi OS Lite (64-bit), Trixie or newer. 32-bit is not supported.
Storage	About 300 MB for the application. The database for a library of 25,000 files is about 25 MB; posters about 100 MB.	32 GB microSD (class A2) or a USB solid-state drive.
Network	Access to the share that holds the media.	Ethernet on the same network as the file server. Port 8080 by default.
Also needed	ffprobe (part of ffmpeg). The application offers to download it on first launch.	Installed by the installer: Node 22, ffmpeg, cifs-utils, smbclient, curl, openssl.
Memory and processor	UNVERIFIED: no minimum has been measured. A scan uses one ffprobe process per parallel probe (8 by default).	UNVERIFIED: no minimum has been measured. Runs on a Pi 4 with 4 GB.

1.2 Installing the desktop application

1. Download `medialedger-2.4.0-setup.exe` from the Releases page of the project on GitHub.
2. Run it. The installer needs no questions answered and installs for the current user.
3. Windows may warn that the publisher is unknown, because the installer is not code-signed. Choose **More info**, then **Run anyway**.
4. MediaLedger starts when the installer finishes.

Data is kept apart from the program, in `%APPDATA%\MediaLedger`. Updating, reinstalling or uninstalling never touches it.

1.3 Installing the web server on a Raspberry Pi

1. Flash Raspberry Pi OS Lite (64-bit) with SSH enabled and start the Pi.
2. Connect over SSH and run the installer:


```
curl -fsSL https://raw.githubusercontent.com/AxialForge/medialedger/main/server/install.sh -o install.sh && sudo bash install.sh
```
1. Type the address of the file server that holds the media, then a user name and password that may read it. The installer lists the shares that server offers.
2. Type the numbers of the shares to use (or `all`). Each is connected under `/mnt/medialedger/`.
3. Choose a web password of at least 8 characters.
4. Open `http://<address of the Pi>:8080` and sign in as `admin`. The welcome guide opens.

The separate document **Installing MediaLedger on a Raspberry Pi** goes through this step by step, with what the terminal shows at each question.

The installer is safe to run again. It creates a service that starts with the Pi, connects the shares, and installs these commands:

Command	What it does
<code>sudo medialedger-setup</code>	The questions again: connect more shares, set the password, show the addresses.
<code>sudo medialedger-update</code>	Downloads the newest release, checks it, installs it and restarts. Data is untouched.
<code>sudo medialedger --set-password</code>	Sets or resets the web password and signs everyone out.
<code>sudo bash install.sh --update-only --port=8080</code>	Moves the service to another port.
<code>sudo bash install.sh --auto-update</code>	Adds a nightly update at about 04:30. <code>--no-auto-update</code> removes it.

1.4 First launch

A new installation opens the **welcome guide** instead of an empty Dashboard. It is one page with four steps:

1. **Connect your storage.** On the Raspberry Pi server, sign in to the file server and tick its shares. On the desktop application there is nothing to connect.
2. **Point at the folders.** Pick the folder for TV shows, for Anime and for Movies with **Browse**, or press **Find them for me**. Press **Save and check the folders**.
3. **Check.** Every line should show a tick: ffprobe is installed, and each folder can be read.
4. **First scan.** Press **Start the first scan**. It reads and measures every file, which takes a while; later scans only read what changed.
5. Press **Finish and open the dashboard**. Optional next: connect Plex, and set a backup folder, both under **Settings**.

1.4.1 Welcome guide

The first page of a new installation. It takes a new server from nothing to a first scan on one page, and can be opened again at any time from Settings, Library.

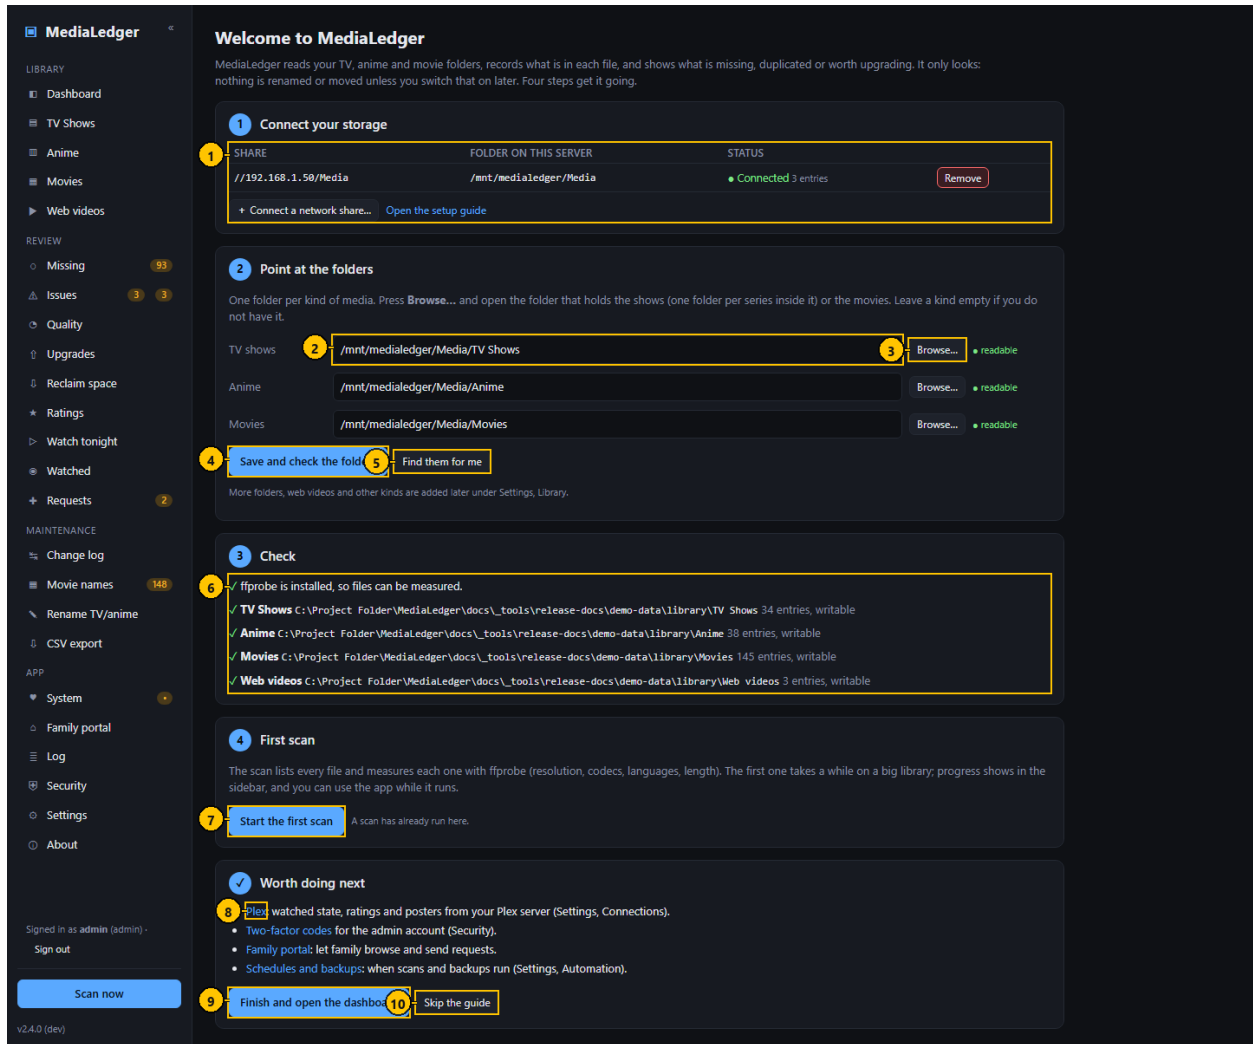


Figure 1. Welcome guide. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Connected shares	Table	The same list and buttons as Settings, Network shares.	–	–	On the desktop application this step is an explanation only.
2	Folder	Text field	The folder that holds that kind of media: one folder per series, or the movies.	A path on the server.	the saved root of that kind	One field each for TV shows, Anime and Movies.
3	Browse	Button	Opens the folder browser.	–	–	–
4	Save and check the folders	Button	Saves the three folders as library roots and checks each can be read.	–	–	Roots of other kinds are kept.
5	Find them for me	Button	Fills the fields from folders named like TV, Shows, Series, Anime, Movies or Films inside the connected shares.	–	–	Check the result before saving.
6	Check	Status	Whether ffprobe is installed and whether each folder can be read, with the number of entries.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Start the first scan	Button	Starts a scan. Progress shows in the sidebar.	–	–	–
8	Worth doing next	Link	Shortcuts to Plex, two-factor codes, the family portal and the schedules.	–	–	–
9	Finish and open the dashboard	Button	Marks the guide as done and opens the Dashboard.	–	–	–
10	Skip the guide	Button	Marks the guide as done without doing the steps.	–	–	–

Typical workflow

1. Step 1: connect the file server (Raspberry Pi server only).
2. Step 2: pick the folder for TV shows, for Anime and for Movies, or press Find them for me. Press Save and check the folders.
3. Step 3: read the check. Every line should have a tick.
4. Step 4: press Start the first scan.
5. Press Finish and open the dashboard.

Features

- Opens by itself while no scan has ever run and the guide has not been finished or skipped.
- Find them for me looks one and two levels into each connected share for folders with the usual names.
- A kind you do not have is simply left empty.

Edge cases

- Only an administrator sees the guide.
- Skip the guide and Finish do the same thing: they stop it opening by itself. Nothing else is lost by skipping.
- More folders, web videos and other kinds are added afterwards on the Settings page.

Messages and what they mean

Message	Meaning and what to do
Connect a share first (step 1)	Find them for me has nowhere to look yet.
No folders with the usual names. Use Browse...	The folders are named differently; pick them by hand.
Saved, but check step 3	At least one folder could not be read. Step 3 says which.

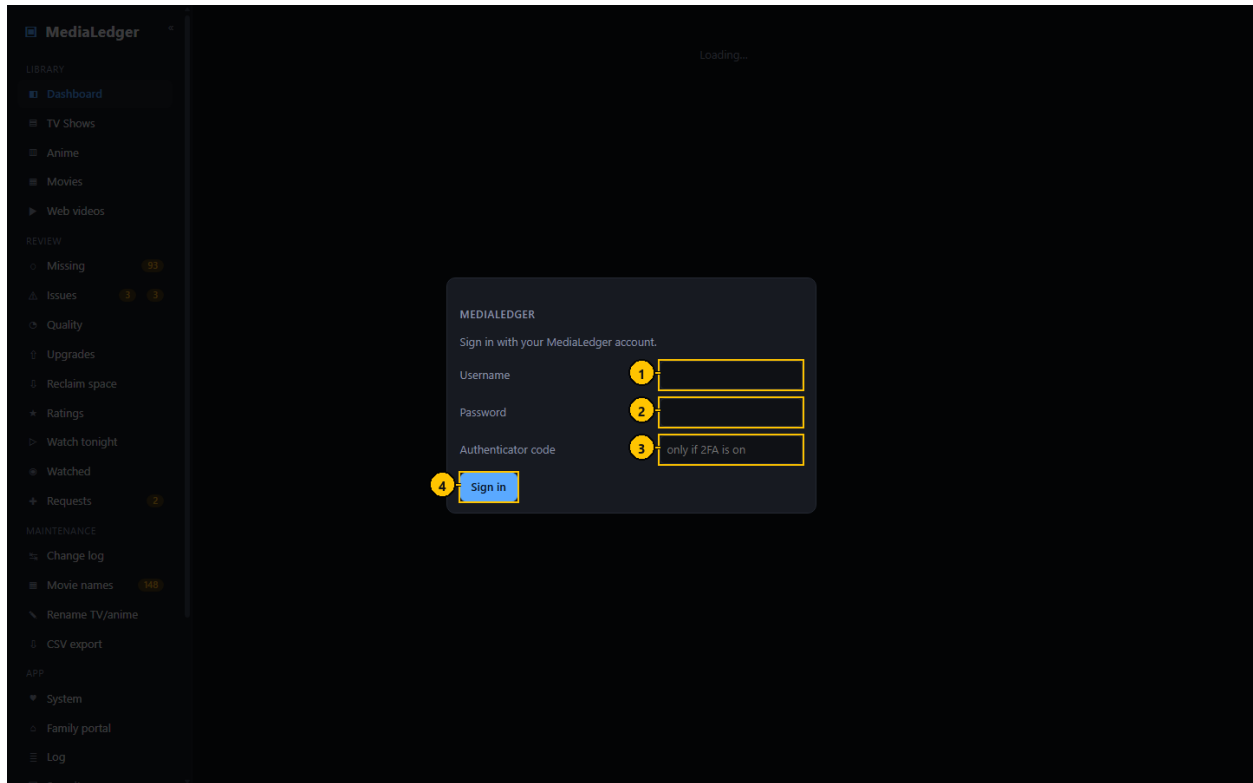


Figure 2. The sign-in dialog of the web server.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	User name	Text field	The account to sign in as.	Letters, digits, dot, dash and underscore; not case sensitive.	admin	The installer creates the account "admin".
2	Password	Password field	The password of that account.	At least 8 characters.	empty	Never stored in the browser by the application.
3	Authenticator code	Text field	The six-digit code, when two-factor codes are on.	6 digits	empty	Leave empty when two-factor codes are off.
4	Sign in	Button	Checks the pair and opens a session.	–	–	Pressing Enter in either field does the same.

Messages and what they mean

Message	Meaning and what to do
Wrong user name or password	The pair did not match an account. The attempt is counted towards the lockout.
Too many failed attempts; this address is locked for 15 minutes	Wait, or sign in from another address. The lockout is per address, not per account.
No account exists yet. On the server run: <code>sudo medialedger --set-password</code>	The server has never had a password set. Run the command on the Raspberry Pi.
Enter the 6-digit code from your authenticator	The password was right; two-factor codes are on and the code is the second step.

2. The interface

Everything happens in one window: a sidebar on the left that never changes, and the page you chose on the right. The desktop application and the web server show the same window; a few buttons that open folders exist only on the desktop.



Figure 3. The main window. The numbers match the table below.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Application name	Label	Shows which application this is. Not clickable.	—	—	—
2	Library group	Navigation	Dashboard, TV Shows, Anime, Movies and Web videos: what is in the library.	—	Dashboard	The page you were last on is highlighted.
3	Review group	Navigation	Missing, Issues, Quality, Upgrades, Reclaim space, Ratings, Watch tonight, Watched and Requests.	—	—	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
4	Count pill	Indicator	How many items wait on that page: missing episodes, open problems, duplicates, pending requests, movie names to tidy.	–	hidden when zero	Amber for attention, red for a fault.
5	Maintenance group	Navigation	Change log, Movie names, Rename TV/anime and CSV export.	–	–	The two rename pages are the only ones that write to the share.
6	App group	Navigation	System, Family portal, Log, Security, Settings and About.	–	–	–
7	Scan now	Button	Starts a scan of every enabled library root.	–	–	Turns into a progress line while a scan runs; a second scan cannot be started until the first ends.
8	Page title	Heading	The name of the page on the right.	–	–	–
9	Fold the sidebar	Button	Folds the sidebar to a strip of icons and back.	–	unfolded	Remembered in this browser. Wide screens only; a phone has the menu button instead.

Finding your way

1. Pick a page in the sidebar.
2. Read the tiles at the top of the page for the summary, then the table or cards below for detail.
3. Click a row to open the title or file it describes.
4. Use the browser Back button, or the back link on a title page, to return.
 - The sidebar is grouped: Library (what you have), Review (what needs attention), Maintenance (tools that change things), App (the application itself).
 - Coloured pills beside a sidebar entry count what is waiting there.
 - On a phone the sidebar is hidden behind the menu button at the top left.
 - Pages that a guest or a standard user may not open are not listed in their sidebar at all.
 - The Adult entry only appears when adult content is switched on for the session.

2.1 The sidebar in full

The sidebar is the application's only menu. It is present on every page.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Menu button	Button	Shows and hides the sidebar on a narrow screen.	–	–	Phones and narrow windows only.
–	Dashboard	Navigation link	Opens the Dashboard page.	–	–	–
–	TV Shows	Navigation link	Opens the TV Shows page.	–	–	–
–	Anime	Navigation link	Opens the Anime page.	–	–	–
–	Movies	Navigation link	Opens the Movies page.	–	–	–
–	Web videos	Navigation link	Opens the Web videos page.	–	–	–

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Adult	Navigation link	Opens the Adult page.	–	–	Hidden until adult content is switched on.
–	Missing	Navigation link	Opens the Missing page.	–	–	–
–	Issues	Navigation link	Opens the Issues page.	–	–	–
–	Quality	Navigation link	Opens the Quality page.	–	–	–
–	Upgrades	Navigation link	Opens the Upgrades page.	–	–	–
–	Reclaim space	Navigation link	Opens the Reclaim space page.	–	–	–
–	Ratings	Navigation link	Opens the Ratings page.	–	–	–
–	Watch tonight	Navigation link	Opens the Watch tonight page.	–	–	–
–	Watched	Navigation link	Opens the Watched page.	–	–	–
–	Requests	Navigation link	Opens the Requests page.	–	–	–
–	Change log	Navigation link	Opens the Change log page.	–	–	–
–	Movie names	Navigation link	Opens the Movie names page.	–	–	–
–	Rename TV/anime	Navigation link	Opens the Rename TV/anime page.	–	–	–
–	CSV export	Navigation link	Opens the CSV export page.	–	–	–
–	System	Navigation link	Opens the System page.	–	–	–
–	Family portal	Navigation link	Opens the Family portal page.	–	–	–
–	Log	Navigation link	Opens the Log page.	–	–	–
–	Security	Navigation link	Opens the Security page.	–	–	–
–	Settings	Navigation link	Opens the Settings page.	–	–	–
–	About	Navigation link	Opens the About page.	–	–	–
–	Account line	Label with link	Who is signed in, with a link to sign out; for a guest, a link to sign in.	–	–	Web server only.
–	Show adult content	Check box	Shows adult titles for this session.	–	off	Not offered to guests.
–	Scan now	Button	Starts a scan of every enabled root.	–	–	Administrators only on the web server.
–	Cancel scan	Button	Stops the running scan.	–	–	Shown only while a scan runs.
–	Scan progress	Progress bar	How far the scan is, and the file being read.	–	–	–
–	Lookup progress	Progress bar	How far the episode lookups are.	–	–	–
–	Folder watch line	Label	Says that folders are being watched and when a change was last seen.	–	–	Shown when folder watch is on.
–	Update pill	Indicator	Appears on About when a newer version is available or downloaded.	–	–	–
–	Version	Label	The version that is running.	–	–	"(dev)" when run from source.
–	Message	Notice	Short confirmations and errors appear at the bottom of the window and fade.	–	–	Red for an error.

2.2 The three ways MediaLedger runs

	What it is	Who uses it
Desktop application	A window on your Windows computer. Reads and writes your own data folder.	You, at your desk.
Web server	The same pages in a browser, served from a Raspberry Pi. Accounts, roles and a security log.	You and the people you give an account, on your network.
Family portal	A separate, small, read-only site with its own address.	People you invite, anywhere.

2.3 Colour themes

The application has eight colour themes, all of them dark. This is Gunmetal on the Movies poster wall. There is no light theme.

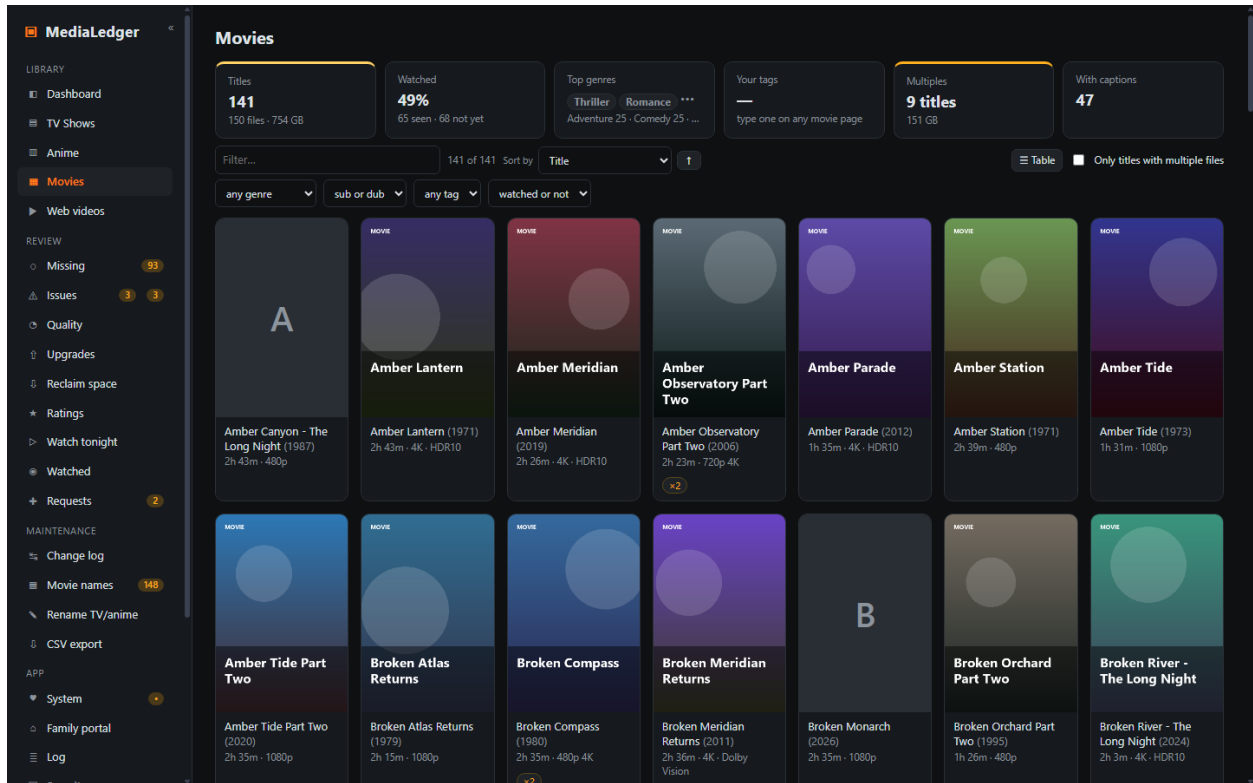


Figure 4. The Gunmetal theme.

- Graphite (the default), Midnight blue, Obsidian, Forest, Rose, Lavender, Gunmetal and Crimson.
- The choice is stored in the browser, so every device and person can have their own.

3. Library

What you have. The Dashboard summarises it; the list pages show it title by title.

3.1 Dashboard

The Dashboard answers "how is the library doing" in one look. Every element is a card; you choose which cards are shown, in what order and how wide (see Dashboard, edit mode).



Figure 5. Dashboard. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Trend period	Drop-down list	Sets the period of every trend card that does not have its own.	last 30 days, last 90 days, last year, all time	last 90 days	Remembered in this browser.
2	Edit dashboard	Button	Turns on edit mode.	–	–	Not shown to guests.
3	Library tile	Tile	Files, total size and hours of video across every library.	–	–	–
4	Linked tile	Tile (link)	A tile that opens the page behind its number: TV Shows, Anime, Movies, Missing, Requests and others.	–	–	The pointer changes to a hand over linked tiles.
5	Coloured tile	Tile with a colour rule	The top edge is green, amber or red according to the thresholds of that card.	Thresholds per card, in the card options.	Shipped defaults, for example library health amber at 97 % and red at 90 %.	–
6	Bar chart card	Chart	One bar per value, split by library. Count and share are printed beside each bar.	–	Ten bars	Square-root scale. Hover for details, click a segment to open the filtered list.
7	Donut card	Chart	Shares of a whole: anime by sub or dub, watched against not yet.	–	–	Click a legend row to open the matching list where one exists.
8	Trend card	Chart	A value over time from the daily snapshots, with the change since the start of the period.	Follows the trend period unless the card has its own.	–	Green or red says whether the change is good for that value.

Typical workflow

1. Read the notices at the top, if any: an overdue job, an unreachable family portal address, or a newer version.
2. Read the number tiles: green is fine, amber wants attention, red wants it now.
3. Click a tile to open the page behind the number.
4. Hover a bar in a chart for the exact count and the split by library; click a bar to open that list already filtered.
5. Change the trend period at the top to see a month, a quarter, a year or everything.

Features

- Number tiles with colour rules; the thresholds are yours to change per card.
- Bar charts on a square-root scale, so a small value is still visible next to a large one; the numbers beside each bar are exact.
- Donut charts for shares, trend lines from the daily snapshots.
- Tables: recently added, largest series, largest movie files, most missing episodes, scan history, next up.

Edge cases

- A trend card needs two daily snapshots before it can draw a line; until then it says so.
- Cards about who watched what are left out for guests, and the overdue-jobs card is shown to administrators only.
- The numbers are held in memory for up to a minute while nothing in the library changes; any change refreshes them at once.

Messages and what they mean

Message	Meaning and what to do
<job> is overdue: last ran N h ago, expected within N h	A scheduled job has not run for twice its interval. Open Settings, Schedules.
Family portal: <address> is not reachable	The server could not open its own portal address twice in a row. Open Family portal.
MediaLedger <version> is available	Web server only. Run the update command on the Raspberry Pi.

3.2 Dashboard, edit mode

Edit mode is where you arrange the Dashboard. Each account keeps its own arrangement on the web server; guests see the administrator's; the desktop application keeps one.

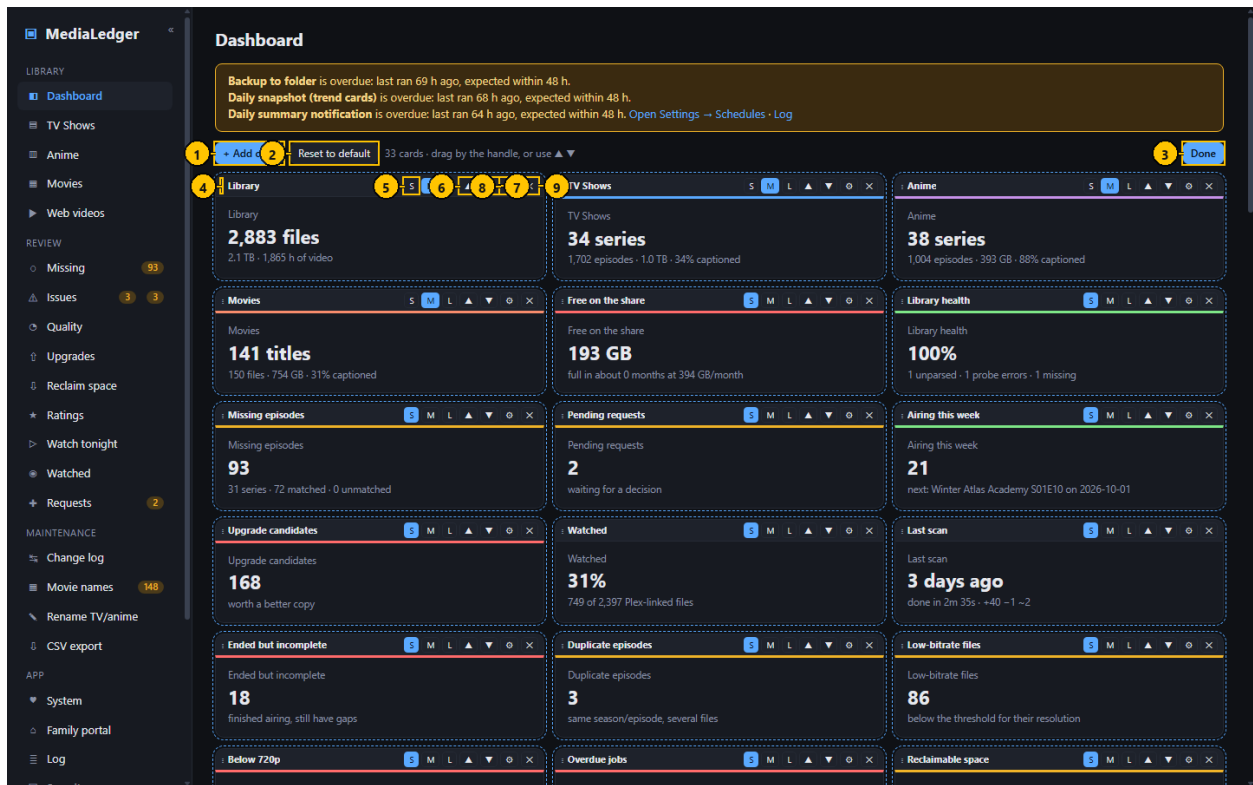


Figure 6. Dashboard, edit mode. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Add card	Button	Opens the catalog of cards.	—	—	—
2	Reset to default	Button	Replaces your arrangement with the original one.	—	—	Asks first. Cannot be undone.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
3	Done	Button	Leaves edit mode and saves.	–	–	–
4	Drag handle	Handle	Drag to move the card. A blue edge on another card shows where it will land.	–	–	Mouse only; use the arrows on a touch screen.
5	Size buttons	Button group	Set the width of the card.	S, M, L, XL; a card offers only the sizes that suit it.	Per card	The current size is highlighted.
6	Move up	Button	Moves the card one place earlier.	–	–	–
7	Move down	Button	Moves the card one place later.	–	–	–
8	Card options	Button	Opens the options of this card.	–	–	–
9	Remove	Button	Takes the card off the Dashboard.	–	–	The card stays in the catalog and can be added again.

Typical workflow

1. Press Edit dashboard.
2. Drag a card by its handle to move it, or press the up and down arrows.
3. Press S, M, L or XL on the handle to change the width.
4. Press the gear to change the title, the period, the rows or the colour thresholds of that card.
5. Press the cross to remove a card, and Add card to put one in.
6. Press Done. The arrangement is saved.

Features

- A grid six columns wide: S is one column, M two, L three (half the width), XL all six.
- Cards can be added more than once, for example one trend over a month and the same trend over a year.
- Reset to default puts the original arrangement back.

Edge cases

- While you edit, the cards are drawn from the numbers already on screen, so moving and resizing is immediate; fresh numbers load when you press Done.
- On narrow screens cards widen by themselves; S becomes half the width and everything larger takes the full width.
- Links inside cards are switched off in edit mode so a click never navigates away by accident.

Messages and what they mean

Message	Meaning and what to do
Layout not saved: <reason>	The arrangement could not be stored on the server. It is kept in this browser and saved on the next change.

3.3 Add a card dialog

The catalog lists every card the Dashboard can show, in eight groups: Library, Health, Quality, Activity, Storage, Watching, Charts and Trends.

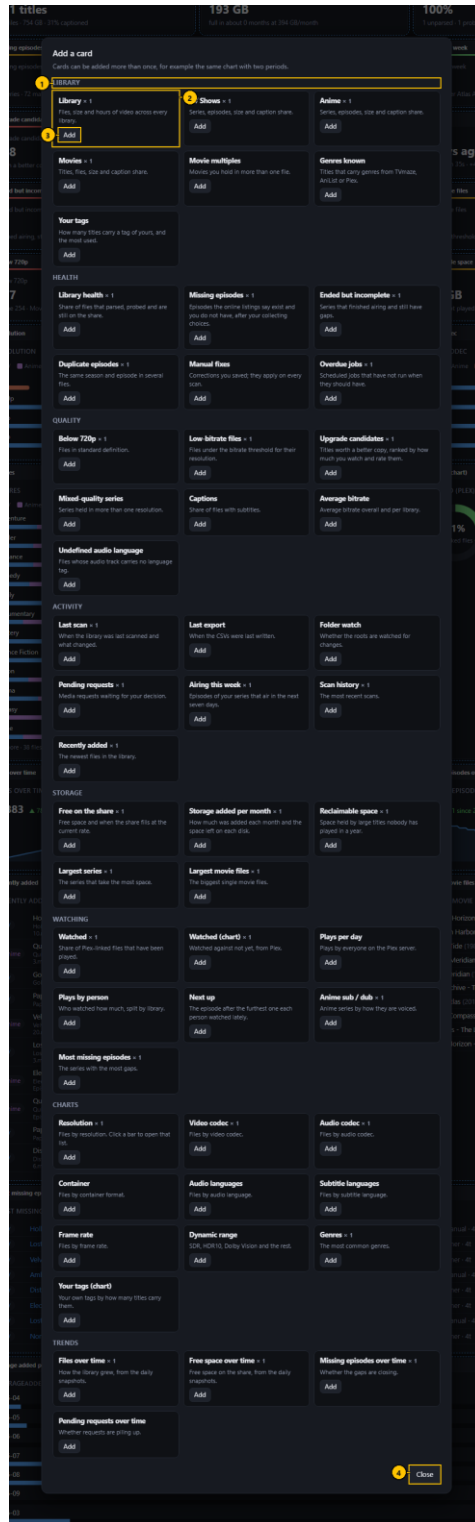


Figure 7. Add a card dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Group heading	Heading	Names the group of cards below it.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Catalog card	Entry	One card: its name and what it shows.	–	–	–
3	Add	Button	Puts that card on the Dashboard at its usual size.	–	–	–
4	Close	Button	Closes the catalog without adding anything.	–	–	The Escape key does the same.

Typical workflow

1. In edit mode press Add card.
2. Find the card; each has one line saying what it shows.
3. Press Add. The card is placed last and the page scrolls to it.
4. Move and size it as you like.

Features

- A small count beside a name shows how many times that card is already on the Dashboard.

Edge cases

- Guests are offered only the cards they are allowed to see.

3.4 Card options dialog

Each card has a few options. How many are shown depends on the "Options shown" level, which is remembered for your account, so a simple need stays simple.

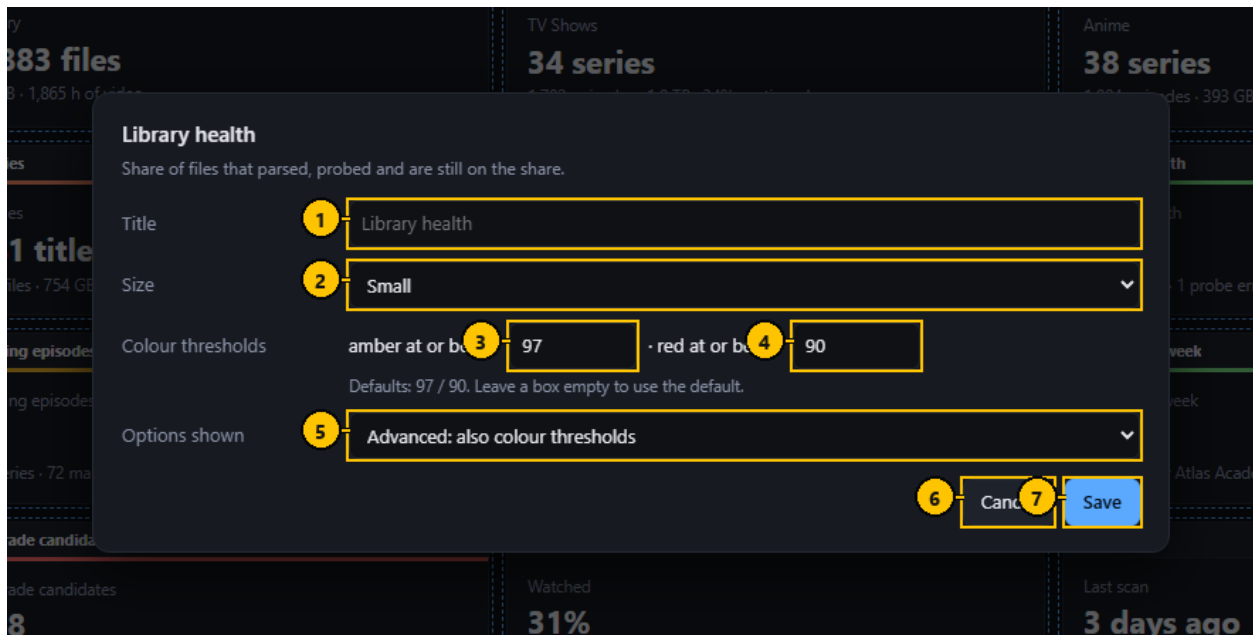


Figure 8. Card options dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Title	Text field	Replaces the name printed on the card.	Free text	The name from the catalog	Leave empty to use the usual name.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Size	Drop-down list	The width of the card.	Small, Medium, Half width, Full width; only the sizes that suit the card.	Per card	The same as the size buttons on the handle.
3	Amber threshold	Number field	The value at which the tile turns amber.	Any number	Per card	Advanced level only. Whether amber means "at or above" or "at or below" is printed beside the field.
4	Red threshold	Number field	The value at which the tile turns red.	Any number	Per card	Advanced level only.
5	Options shown	Drop-down list	How much this dialog offers.	Simple, Standard, Advanced	Standard	Saved for your account at once; the dialog redraws.
6	Cancel	Button	Closes without saving.	–	–	–
7	Save	Button	Saves the options of this card.	–	–	–

Typical workflow

1. In edit mode press the gear on a card.
2. Change what you need.
3. Press Save. The card is redrawn.

Features

- Simple shows the title and the size.
- Standard adds the period for trend cards and the number of rows for lists.
- Advanced adds the colour thresholds for number tiles.

Edge cases

- Thresholds set with the gear on a tile before version 2.0 are carried over.
- Emptying a threshold returns it to the shipped default.

3.5 TV Shows

One row per series. TV Shows and Anime are the same page over two libraries; Anime adds the sub or dub figures.

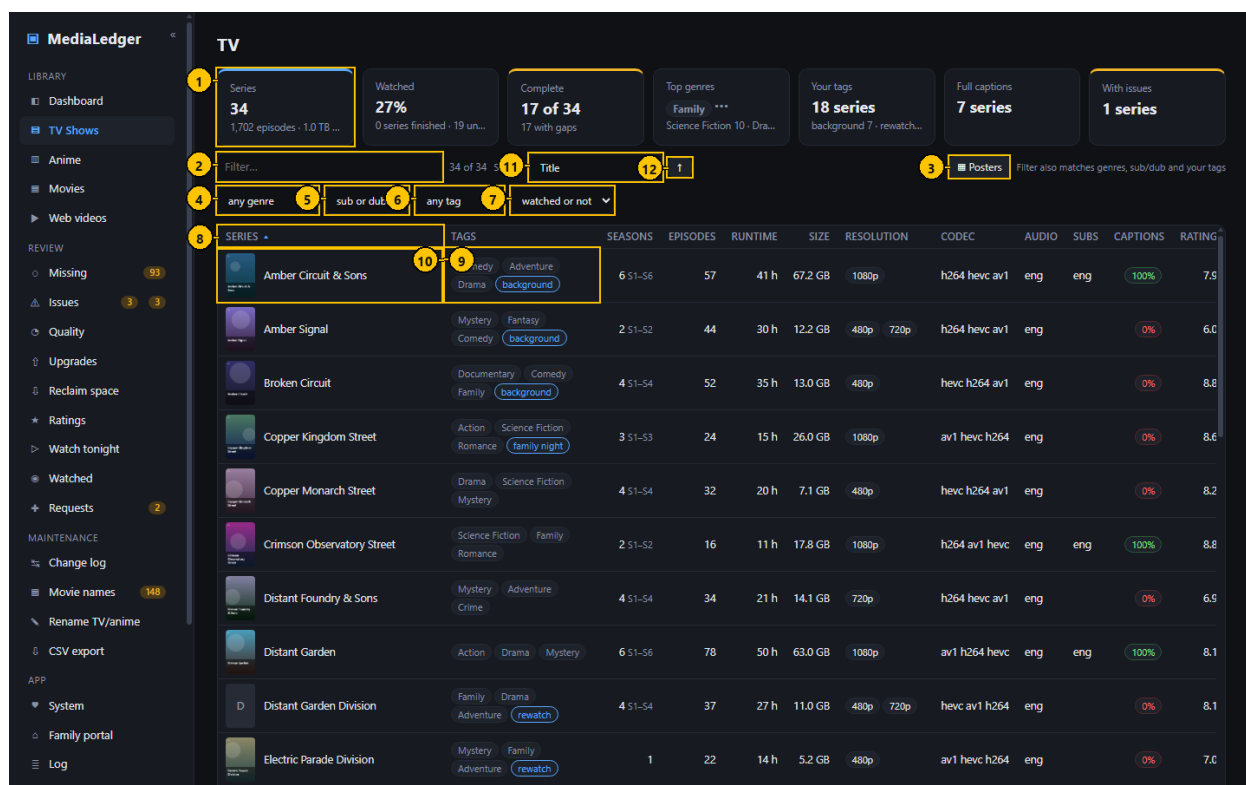


Figure 9. TV Shows. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Series, watched share, complete series, top genres, your tags, captions, series with issues.	—	—	Complete and With issues are links.
2	Filter	Search field	Keeps the rows that contain what you type.	Any text	empty	Matches title, genres, sub or dub, tags, resolution, codec and languages.
3	Posters / Table	Button	Switches between the table and a wall of posters.	—	Table	Remembered in this browser for every list.
4	Genre	Drop-down list	Keeps the series with that genre.	Every genre present in this library	any genre	—
5	Sub or dub	Drop-down list	Keeps the series voiced that way.	Subbed, Dubbed, Dual audio, Mixed	sub or dub	Mostly useful for Anime.
6	Tag	Drop-down list	Keeps the series carrying that tag of yours.	Every tag in use	any tag	—
7	Watched	Drop-down list	Keeps unwatched, partly watched, watched, or series Plex does not have.	—	watched or not	From Plex play counts.
8	Column heading	Sortable heading	Sorts the table by that column.	—	Series, A to Z	A small arrow marks the sorted column.
9	Series	Cell	Poster and name. A series with no poster shows its first letter.	—	—	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
10	Tags	Cell	Genres in grey, sub or dub in colour, your own tags outlined.	–	–	A "+N" means more than fit.
11	Sort by	Dropdown	What the list is ordered by.	Title, Year, Online rating, Audience rating, Critic rating, My rating, Unwatched episodes, Last episode added, Date added, Date viewed, Plays, Episodes, Seasons, Duration, Size, Resolution, Bitrate, Missing episodes, Randomly	Title	Remembered per list in this browser. Titles with no value sort last.
12	Sort direction	Button	Switches between ascending and descending.	–	ascending	With Randomly, shuffles again.

Typical workflow

1. Read the tiles for the library as a whole.
2. Narrow the list with the filter box and the four drop-down lists.
3. Click a column heading to sort by it; click again to reverse.
4. Click a row to open the series.

Features

- A poster thumbnail beside each title.
- Genres come from the online match or from Plex; sub or dub is worked out from the audio and subtitle languages of the files; your own tags are typed on the series page.
- The Missing column counts episodes that aired and that you do not have, after your collecting choices.

Edge cases

- A series without an online match has no expected count, so Missing is empty rather than zero.
- The filter box also matches genres, sub or dub and tags.
- A link such as #tv?q=4K, which the Dashboard charts produce, opens the list already filtered.

3.6 Poster wall view

The same list as a wall of posters. It is a view of the table, not a separate page, so the filter box, the drop-down lists and the sort order all keep working.

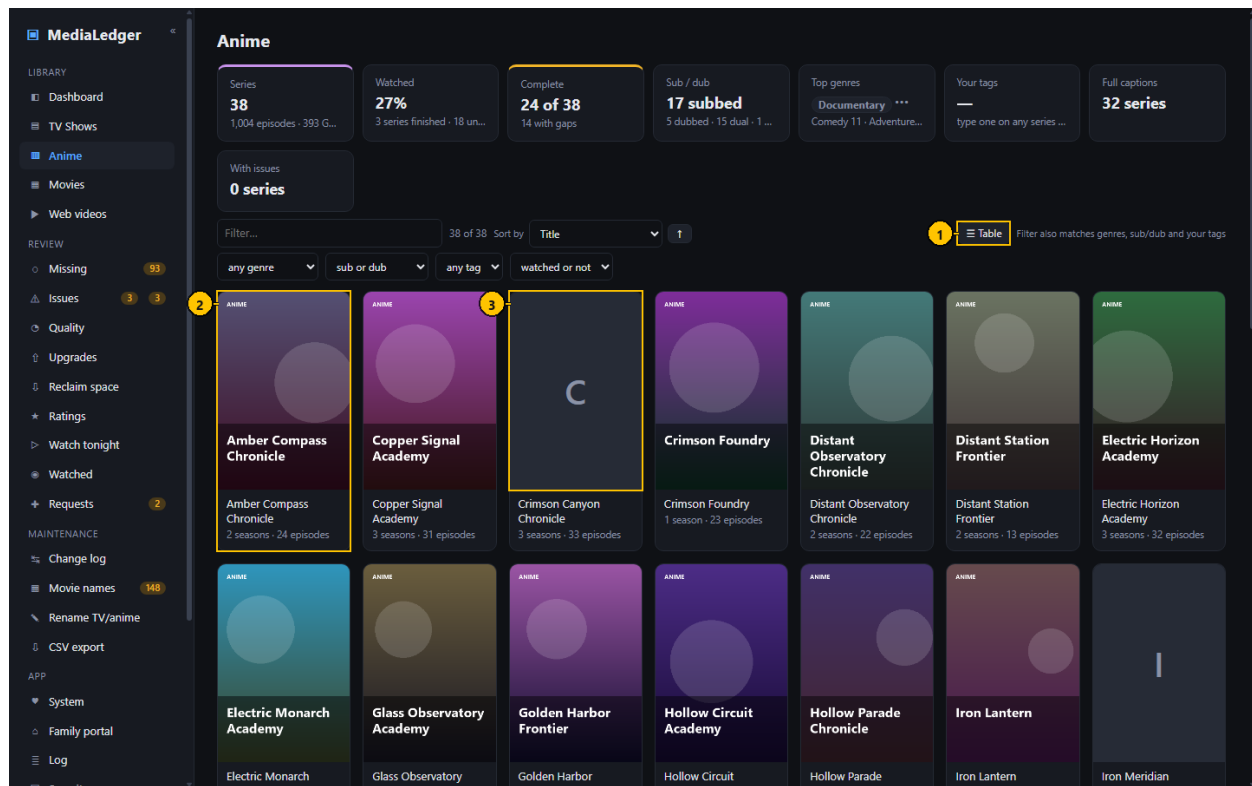


Figure 10. Poster wall view. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Table	Button	Returns to the table.	—	—	—
2	Poster tile	Tile	One title. Click to open it.	—	—	—
3	Title without a poster	Tile	Shown when no source had art for the title.	—	—	It is asked for again after two weeks.

Typical workflow

1. Press Posters in the toolbar of a list.
2. Scroll, filter or search as usual.
3. Click a poster to open the title.
4. Press Table to return.

Features

- Posters load as they scroll into view.
- Titles without art show their first letter on a plain tile.

Edge cases

- The column headings are hidden on the wall; choose the sort order in the table first.

3.7 Poster wall: details card

On the poster wall, resting the pointer on a tile opens a card with the rest of what the table would show for that title, so the wall can be browsed without switching back.

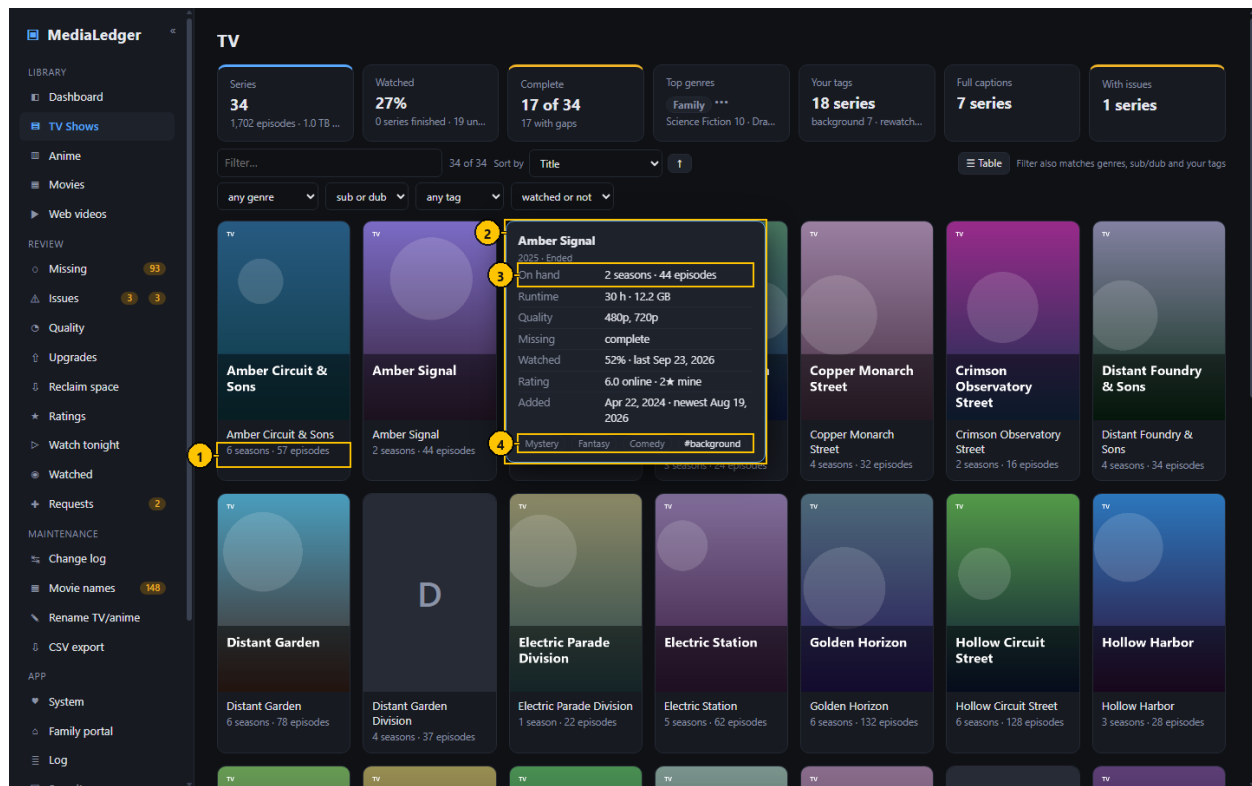


Figure 11. Poster wall: details card. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Facts line	Label	Seasons and episodes on hand under the title; for a movie, length and quality.	—	—	Shown on the wall only.
2	Details card	Card	Opens after the pointer rests on a tile for about a third of a second.	—	closed	Cannot be clicked; it is information only.
3	Fact rows	Label	One row per fact: On hand, Runtime, Quality, Missing, Watched, Rating, Next episode, Added.	—	—	Empty facts are left out.
4	Genres and tags	Label	Up to five genres, then your own tags with a # in front.	—	—	—

Typical workflow

1. Switch a list to the poster wall with Posters in the toolbar.
2. Rest the pointer on a tile for a moment. The card opens beside it.
3. Move away, scroll or click and the card closes. Clicking the tile opens the title as usual.

Features

- Series: seasons and episodes on hand, runtime and size, quality, missing episodes, watched share and last viewed, ratings, next episode, dates added, genres and tags.
- Movies: versions and size, quality with bitrate, editions, plays, ratings, audio and subtitle languages, date added.
- The card stays inside the window: it opens to the left of a tile near the right edge.

Edge cases

- A line is left out when there is nothing to say, for example Watched before Plex has been synced.
- Touch screens have no pointer to rest, so the card is not shown there.

3.8 Series page (episodes)

Everything about one series: what you have, what is missing, and the details of every file.

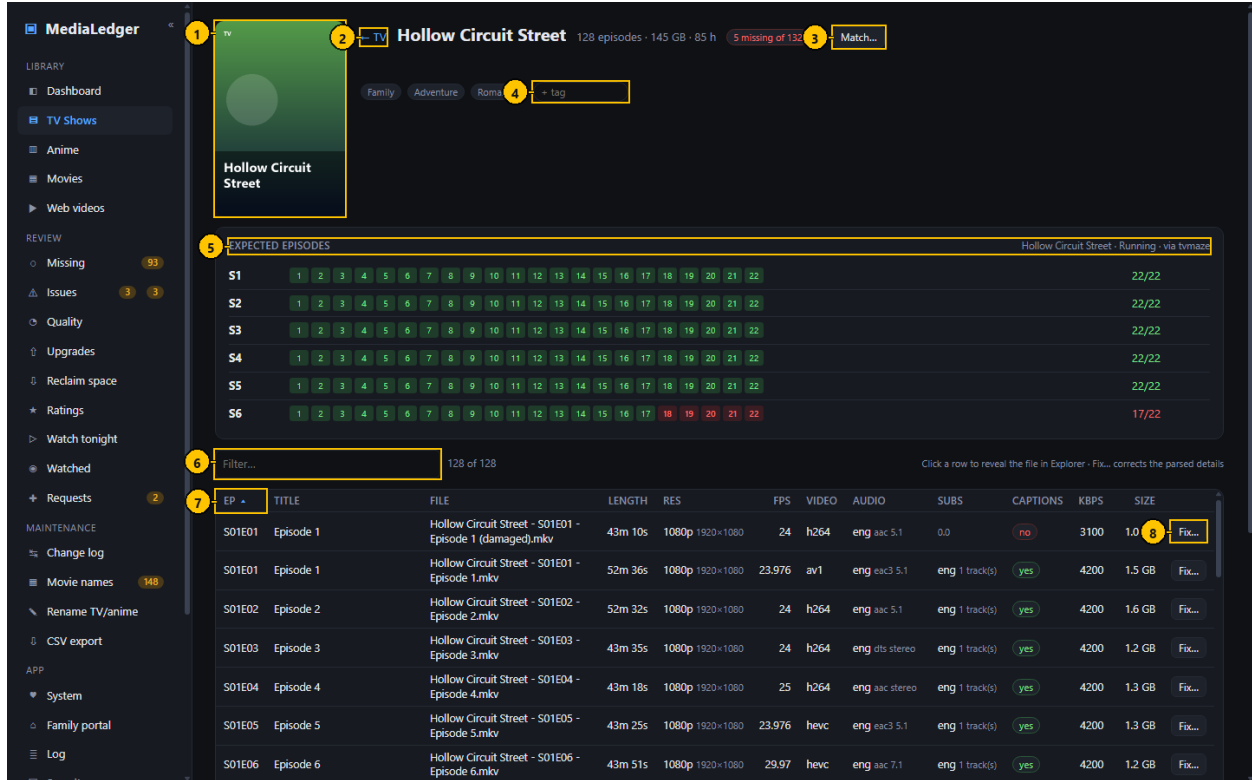


Figure 12. Series page (episodes). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Poster	Image	The poster of the series.	—	—	From Plex, AniList or TVmaze.
2	Back link	Link	Returns to the list.	—	—	—
3	Match	Button	Opens the Match dialog for this series.	—	—	—
4	Add a tag	Text field	Adds a tag of your own to the series.	Up to 40 characters	empty	Press Enter to add.
5	Expected episodes	Card	One row per season with a box per episode.	—	—	The count on the right is episodes on hand out of episodes expected.
6	Filter	Search field	Keeps the files that contain what you type.	—	empty	—
7	Column heading	Sortable heading	Sorts the files.	—	Episode order	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
8	Fix	Button	Opens the Fix dialog for that file.	–	–	Administrators only on the web server.

Typical workflow

1. Read the Expected episodes card: a green number is an episode you have, a red one is missing.
2. Type a tag and press Enter to add it; click a tag of yours to remove it.
3. Click a row to show the file in its folder (desktop), or press Fix to correct how the file was read.
4. Press Match if the online listing is the wrong series.

Features

- A large poster beside the title.
- The expected episodes come from TVmaze or AniList; episodes that have not aired yet are not counted.

Edge cases

- "absolute numbering" appears when the files are numbered straight through while the listing is split into seasons; that season is skipped rather than reported as hundreds of gaps.
- A file that was present and has vanished from the share is listed last and marked missing.

3.9 Movies

One row per movie. A movie held in several files, for example two editions or two qualities, is one row with a count.

The screenshot shows the MediaLedger interface for the 'Movies' section. Numbered callouts point to the following elements:

- 1: Titles card showing 141 titles and 754 GB.
- 2: Filter input field.
- 3: Filter dropdown menu.
- 4: Filter dropdown menu.
- 5: Filter dropdown menu.
- 6: Filter dropdown menu.
- 7: Filter dropdown menu.
- 8: Title input field.
- 9: Filter dropdown menu.

The main table lists movies with columns: TITLE, YEAR, TAGS, FILES, VERSIONS, LENGTH, CODEC, AUDIO, SUBS, CAPTIONS, and SIZE. The first row is 'Amber Canyon - The Long Night (1987)'.

TITLE	YEAR	TAGS	FILES	VERSIONS	LENGTH	CODEC	AUDIO	SUBS	CAPTIONS	SIZE
Amber Canyon - The Long Night (1987)	1987	Thriller Crime	1	480p	2h 43m	h264	eng		no	1.1 GB
Amber Lantern (1971)	1971	Documentary Family	1	4K	2h 43m	av1	eng		no	15.0 GB
Amber Meridian (2019)	2019	Romance Family	1	4K	2h 26m	hevc	eng		no	13.8 GB
Amber Observatory Part Two (2006)	2006	Adventure Action	2	720p 4K extended	2h 23m	h264 av1	eng		no	13.5 GB
Amber Parade (2012)	2012	Documentary Thriller	1	4K	1h 35m	av1	eng		no	9.2 GB
Amber Station (1971)	1971	Comedy Documentary	1	480p	2h 39m	h264	eng		no	949 MB
Amber Tide (1973)	1973	Family Action	1	1080p	1h 31m	hevc	eng		no	2.1 GB
Amber Tide Part Two (2020)	2020	Romance Thriller	1	1080p	2h 35m	av1	eng	eng	yes	4.1 GB
Broken Atlas Returns (1979)	1979	Romance Mystery	1	1080p	2h 15m	av1	eng		no	3.7 GB
Broken Compass (1980)	1980	Science Fiction Drama	2	480p 4K extended	2h 35m	h264 hevc	eng		no	17.1 GB

Figure 13. Movies. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Titles, watched share, top genres, your tags, multiples, captions.	–	–	Multiples is a link to the Duplicates tab.
2	Filter	Search field	Keeps the rows that contain what you type.	–	empty	Matches title, year, genres, tags, resolution, codec and dynamic range.
3	Posters / Table	Button	Switches between the table and the poster wall.	–	Table	–
4	Only titles with multiple files	Check box	Keeps the movies that have more than one file.	–	off	–
5	Genre	Drop-down list	Keeps the movies with that genre.	–	any genre	–
6	Watched	Drop-down list	Keeps unwatched or watched movies, or the ones Plex does not have.	–	watched or not	–
7	Title	Cell	Poster, name and year; an amber "x2" when there are several files.	–	–	–
8	Sort by	Dropdown	What the list is ordered by.	Title, Year, Audience rating, My rating, Duration, Progress, Plays, Date added, Date viewed, Resolution, Bitrate, Size, Versions, Randomly	Title	Remembered in this browser.
9	Sort direction	Button	Switches between ascending and descending.	–	ascending	–

Typical workflow

1. Narrow the list with the filter box and the drop-down lists.
2. Tick "Only titles with multiple files" to review duplicates and editions.
3. Click a row to open the movie.

Features

- Versions lists every resolution on hand and the edition names.
- Genres come from Plex.

Edge cases

- A file in a movie folder whose name carries a season and episode marker is reported on the Issues page, not silently shown as a movie.

3.10 Movie page (versions)

The files that make up one movie, side by side, so you can see which copy is the better one.

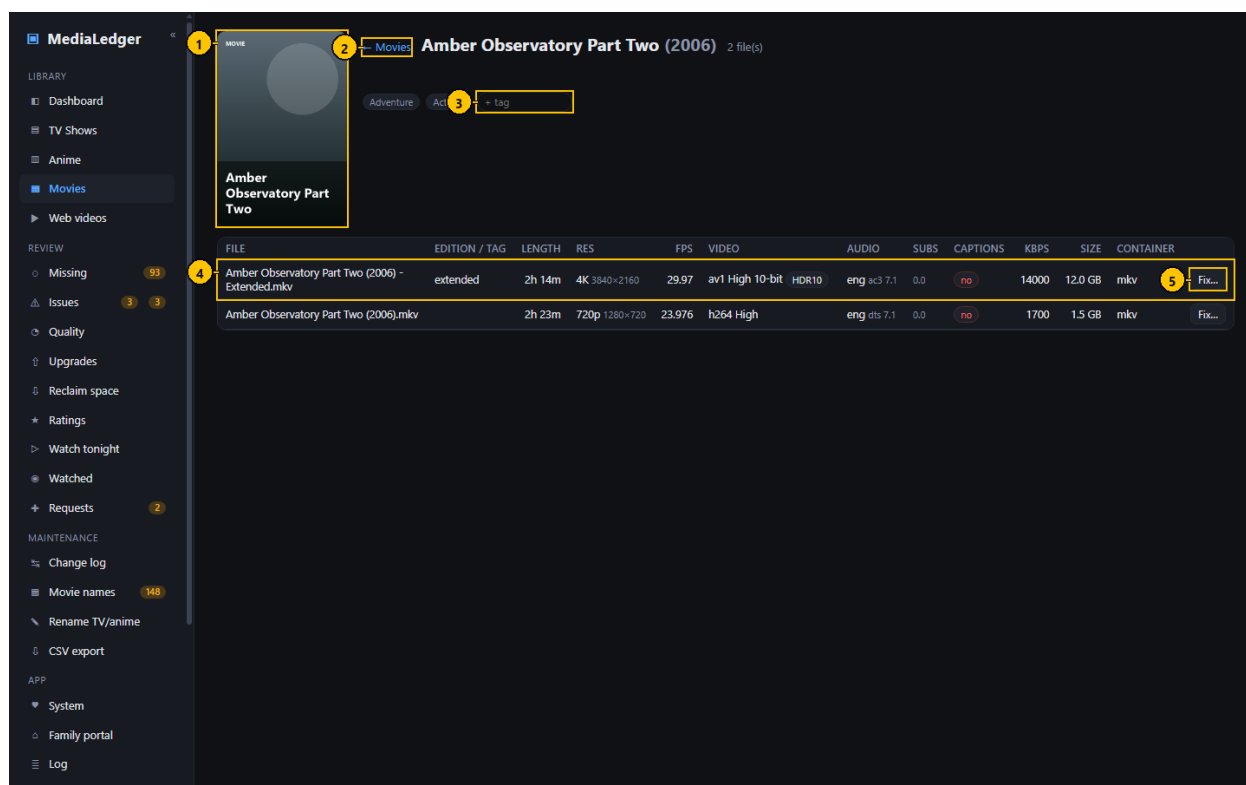


Figure 14. Movie page (versions). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Poster	Image	The poster of the movie.	—	—	—
2	Back link	Link	Returns to Movies.	—	—	—
3	Add a tag	Text field	Adds a tag of your own.	Up to 40 characters	empty	Press Enter to add.
4	File row	Row	One file of this movie with its measured details.	—	—	Click to show the file in its folder (desktop).
5	Fix	Button	Opens the Fix dialog for that file.	—	—	—

Typical workflow

1. Compare resolution, bitrate, size, audio and subtitles.
2. Press Fix on a file that was read wrongly, for example to give it an edition name.

Features

- Tags work as on a series page.

3.11 Web videos

Downloaded web videos, grouped by channel. The channel is the folder name and the video identifier is read from the square brackets in the file name.

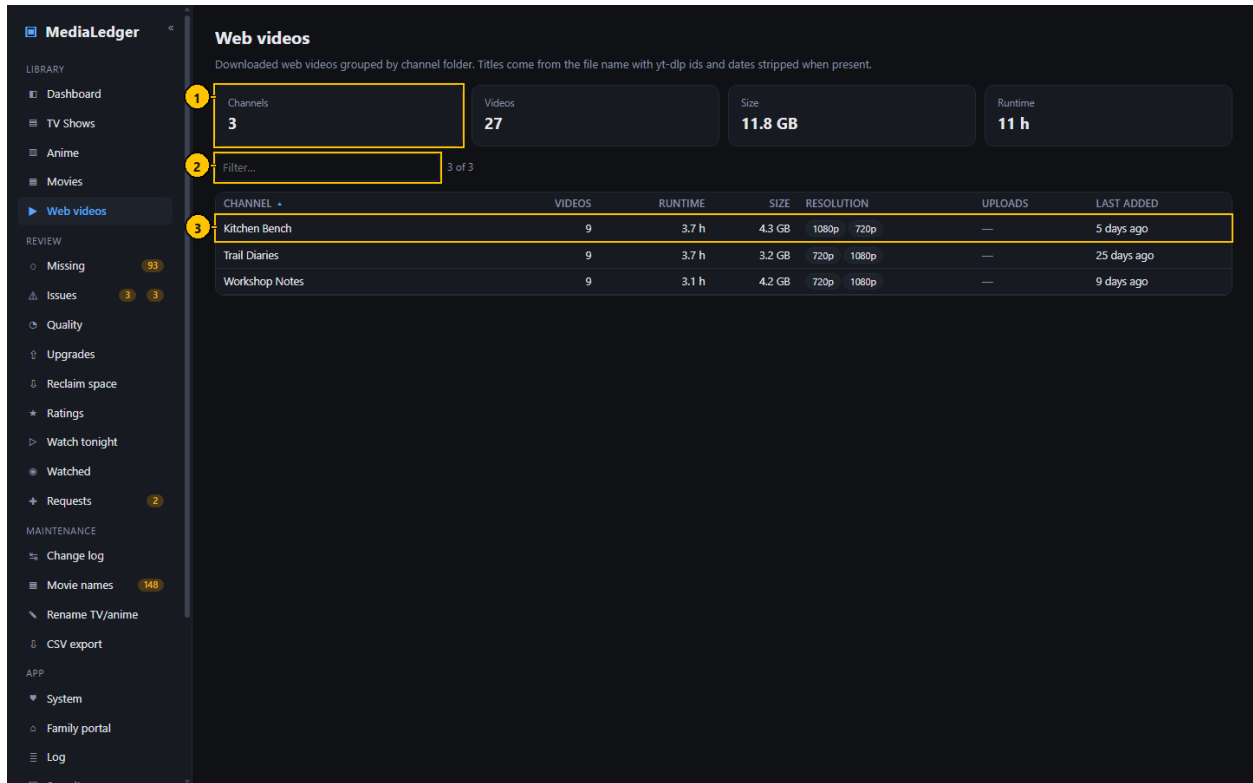


Figure 15. Web videos. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Channels, videos, total size and hours.	—	—	—
2	Filter	Search field	Keeps the channels that contain what you type.	—	empty	—
3	Channel row	Row	One channel with its count, size and the resolutions present.	—	—	Click to open the channel.

Typical workflow

1. Click a channel to list its videos.
2. Use the filter box to find a channel.

Features

- Videos are kept out of the missing-episode and movie logic; they are listed and measured, nothing more.

3.12 Adult library

Roots of the type Adult are scanned like any other but kept apart: hidden by default, out of the CSV files unless you allow it, never given a poster, and never shown on the family portal.

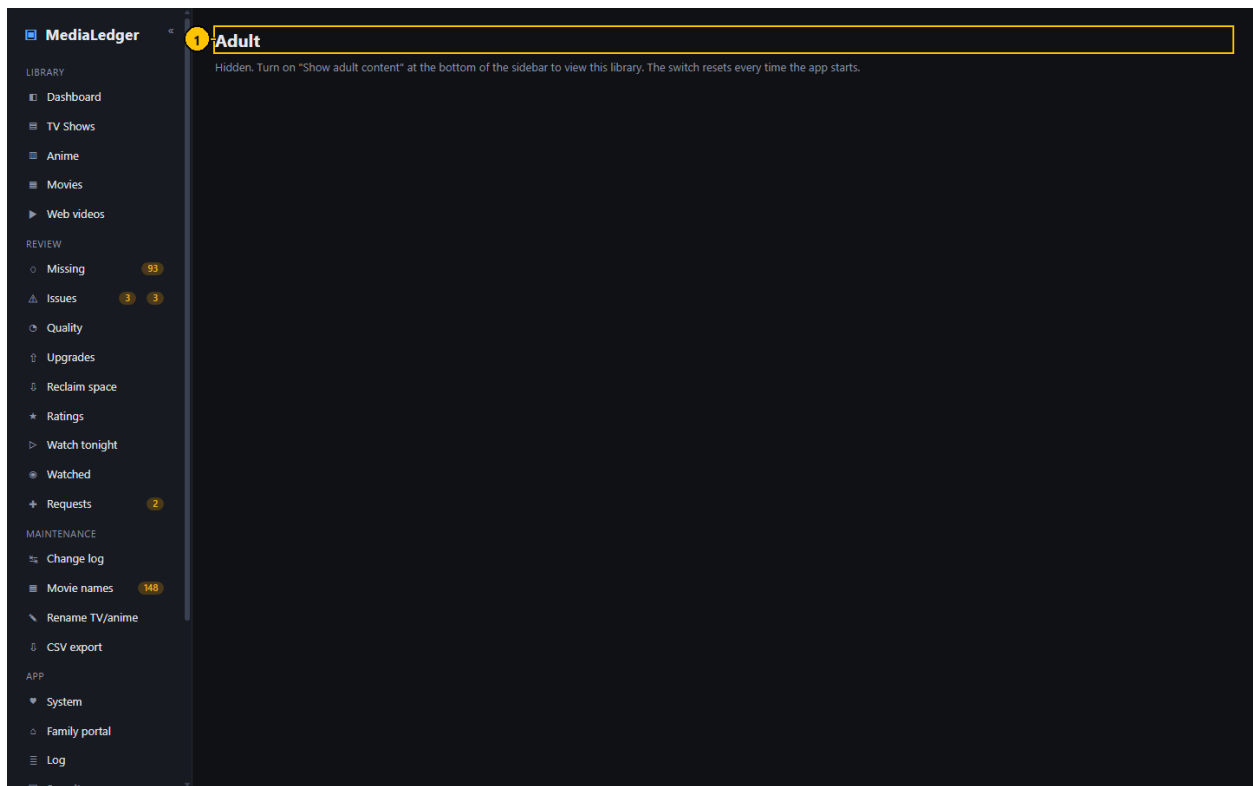


Figure 16. Adult library. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Page title	Heading	Adult. With the switch off the page only explains how to turn it on.	–	–	–

Typical workflow

1. Switch "Show adult content" on at the bottom of the sidebar; on the web server this applies to your session only.
2. The Adult entry appears in the sidebar and adult titles join the other pages.

Edge cases

- Guests cannot switch adult content on.
- With the switch off this page says so and lists nothing.

4. Review

What needs attention, and what to do next.

4.1 Missing episodes

Compares the episodes you have with the episodes that exist according to TVmaze (TV) and AniList (anime), and lists the gaps.

MediaLedger

LIBRARY

Dashboard

TV Shows

Anime

Movies

Web videos

REVIEW

Missing 93

Issues 3 3

Quality

Upgrades

Reclaim space

Ratings

Watch tonight

Watched

Requests 2

MAINTENANCE

Change log

Movie names 148

Rename TV/anime

CSV export

APP

System

Family portal

Log

Security

Settings

About

Signed in as admin (admin) · Sign out

Scan now

V2.4.0 (dev)

Missing episodes

Expected episode counts come from lookups that are currently disabled in Settings. Compared with what is on disk per season. Use Match... when a series was matched to the wrong entry, was not found, or you want to enter counts by hand.

Series with gaps 31
93 episodes missing

Complete series 41

No match found 0
use Match... to search

Not looked up yet 0

Locked by you 0
manual matches or counts

AIRING NEXT

FROM TVMAZE / ANILIST; THE 'MISSING' COUNT LEAVES OUT EPISODES THAT HAVE NOT AIRED

today	2026-10-01	Winter Atlas Academy S01E10	4 missing
tomorrow	2026-10-02	Distant Garden Division S04E08	3 missing
tomorrow	2026-10-02	Electric Monarch Academy S03E13	up to date
tomorrow	2026-10-02	Hollow Harbor S03E09	2 missing
Saturday	2026-10-03	Lost Archive Division S06E11	up to date
Saturday	2026-10-03	Midnight Archive Frontier S02E11	2 missing
Saturday	2026-10-03	Midnight Harbor S01E25	up to date
Sunday	2026-10-04	Distant Observatory Chronicle S02E11	2 missing
Sunday	2026-10-04	Hollow Circuit Street S06E18	5 missing
Sunday	2026-10-04	Lost Observatory & Sons S06E06	5 missing
Sunday	2026-10-04	Salt River Frontier S02E13	up to date
Sunday	2026-10-04	Seventh Circuit S01E23	up to date
Monday	2026-10-05	Crimson Canyon Chronicle S03E10	3 missing
Monday	2026-10-05	Distant Station Frontier S01E13	up to date
Monday	2026-10-05	Northern Monarch Division S06E07	2 missing
Monday	2026-10-05	Winter Observatory S06E11	3 missing
Tuesday	2026-10-06	Amber Compass Chronicle S02E13	up to date
Tuesday	2026-10-06	Copper Monarch Street S04E09	up to date
Tuesday	2026-10-06	Electric Parade Division S01E23	up to date
Tuesday	2026-10-06	Paper Tide Division S04E23	up to date
Tuesday	2026-10-06	Velvet River Chronicle S01E25	up to date

FINISHED AIRING, STILL INCOMPLETE

Velvet River Ended	4 of 50
Amber Circuit & Sons Ended	3 of 60
Electric Station Ended	3 of 65
Lost Atlas Division Ended	3 of 78
Northern Monarch & Sons Ended	3 of 66
Paper Horizon Division Ended	3 of 8
Quiet Archive Ended	3 of 32
Quiet Station & Sons Ended	3 of 65
Salt Signal Ended	3 of 40
Velvet Lantern Division Ended	2 of 110
Lost Signal Division Ended	1 of 65
Copper Signal Academy FINISHED	5 of 36
Paper Harbor FINISHED	5 of 13
Electric Horizon Academy FINISHED	4 of 36
Hollow Circuit Academy FINISHED	2 of 25
Quiet Signal Academy FINISHED	2 of 36
Quiet Parade FINISHED	1 of 39
Winter Garden Frontier FINISHED	1 of 36

Look up new series

Re-check all unlocked series

Rate-limited: roughly 1-2 series per second.

Filter...

72 of 72

LIBRARY	SERIES	SOURCE	STATUS	EXPECTED	HAVE	MISSING	WHICH		
TV	Hollow Circuit Street	tmaze	Running	132	127	5	S6: 18,19,20,21,22	Match...	Collect...
TV	Lost Observatory & Sons	tmaze	Running	60	55	5	S6: 6,7,8,9,10	Match...	Collect...
Anime	Copper Signal Academy	anilist	FINISHED	36	31	5	S3: 8,9,10,11,12	Match...	Collect...
Anime	Paper Harbor	anilist	FINISHED	13	8	5	S1: 9,10,11,12,13	Match...	Collect...
TV	Velvet River	tmaze	Ended	50	46	4	S5: 7,8,9,10	Match...	Collect...
Anime	Electric Horizon Academy	anilist	FINISHED	36	32	4	S3: 9,10,11,12	Match...	Collect...
Anime	Paper Foundry Frontier	anilist	RELEASING	12	8	4	S1: 9,10,11,12	Match...	Collect...
Anime	Salt Kingdom	anilist	RELEASING	12	8	4	S1: 9,10,11,12	Match...	Collect...
Anime	Winter Atlas Academy	anilist	RELEASING	13	9	4	S1: 10,11,12,13	Match...	Collect...
TV	Amber Circuit & Sons	tmaze	Ended	60	57	3	S6: 8,9,10	Match...	Collect...
TV	Distant Garden Division	tmaze	Running	40	37	3	S4: 8,9,10	Match...	Collect...
TV	Electric Station	tmaze	Ended	65	62	3	S5: 11,12,13	Match...	Collect...
TV	Lost Atlas Division	tmaze	Ended	78	75	3	S6: 11,12,13	Match...	Collect...
TV	Northern Monarch & Sons	tmaze	Ended	66	63	3	S3: 20,21,22	Match...	Collect...
TV	Paper Horizon Division	tmaze	Ended	8	5	3	S1: 6,7,8	Match...	Collect...
TV	Quiet Archive	tmaze	Ended	32	29	3	S4: 6,7,8	Match...	Collect...
TV	Quiet Station & Sons	tmaze	Ended	65	62	3	S5: 11,12,13	Match...	Collect...
TV	Salt Signal	tmaze	Ended	40	37	3	S5: 6,7,8	Match...	Collect...
TV	Winter Observatory	tmaze	Running	78	75	3	S6: 11,12,13	Match...	Collect...
Anime	Crimson Canyon Chronicle	anilist	RELEASING	36	33	3	S3: 10,11,12	Match...	Collect...
Anime	Iron Meridian Academy	anilist	RELEASING	24	21	3	S2: 10,11,12	Match...	Collect...

Figure 17. Missing episodes. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Series with gaps, complete series, no match found, lookups pending, locked by you.	–	–	–
2	Airing next	Card	The next episode of each running series with its date; this week first.	–	25 rows	Dates come with the episode lookup.
3	Look up new series	Button	Looks up the series that have never been matched.	–	–	Runs in the background.
4	Re-check all unlocked series	Button	Looks every series up again except the locked ones.	–	–	Slow by design: about one series a second.
5	Filter	Search field	Keeps the series that contain what you type.	–	empty	–
6	Column heading	Sortable heading	Sorts the table.	–	Missing, most first	–
7	Policy badge	Badge	"muted" or "from S2E1" when a collecting choice applies; the tooltip gives the full count.	–	–	–
8	Match	Button	Opens the Match dialog.	–	–	–
9	Collect	Button	Opens the Collect dialog.	–	–	–

Typical workflow

1. Read the tiles: series with gaps, complete series, series without a match.
2. Read "Airing next" for what is coming this week.
3. Sort the table by Missing to work from the biggest gap.
4. Press Match when the listing is the wrong series or no listing was found.
5. Press Collect to say what you are collecting of a long-running series.

Features

- Episodes that have not aired yet are never counted as missing.
- A collecting choice (from an episode onward, or muted) changes the count everywhere: Dashboard, sidebar, daily summary and the status address.
- A locked match is never replaced by an automatic lookup.

Edge cases

- The online services allow about one request a second, so "Re-check all" takes a while on a large library.
- "absolute numbering" marks a season that was skipped because the files are numbered straight through.

Messages and what they mean

Message	Meaning and what to do
HTTP 403 from graphql.anilist.co	AniList refused the request, usually because too many were sent. It is tried again on the next lookup.
no match	Neither service had a series with a close enough name. Use Match.

4.2 Match dialog

Chooses which online listing a series is compared with, or lets you type the episode counts yourself.

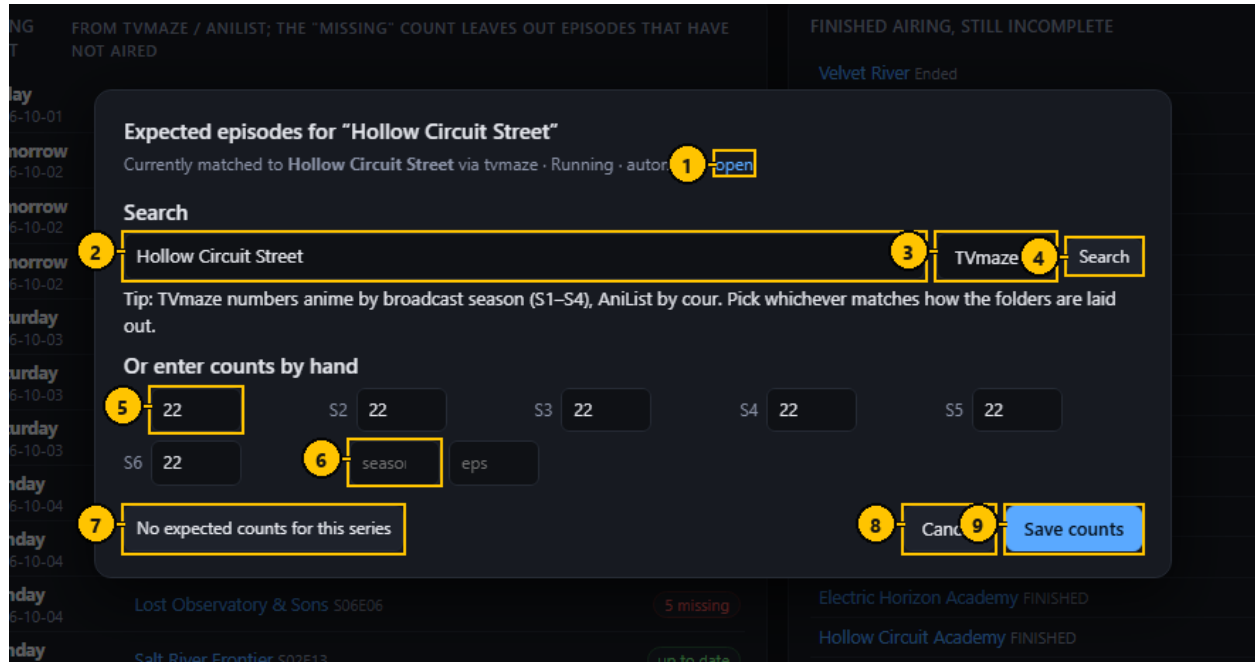


Figure 18. Match dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Open	Link	Opens the current listing on the service's own site.	–	–	Desktop: in your browser.
2	Search words	Text field	What to search the service for.	Any text	The series name	Enter starts the search.
3	Service	Drop-down list	Which service to search.	Tvmaze, AniList	Tvmaze for TV, AniList for Anime	–
4	Search	Button	Searches and lists the results.	–	–	–
5	Episodes per season	Number fields	The counts to compare against when you enter them by hand.	Whole numbers	The current counts	One field per season.
6	Add a season	Number fields	A season number and its episode count, to add one that is not listed.	–	empty	–
7	No expected counts for this series	Button	Records that the series has no listing, so it is not reported as unmatched.	–	–	–
8	Cancel	Button	Closes without saving.	–	–	–
9	Save counts	Button	Saves the counts you typed and locks them.	–	–	–

Typical workflow

1. Change the search words if the folder name is unusual, pick the service, press Search.
2. Pick the right result from the list. The match is saved and locked.
3. If no listing fits, type the number of episodes per season and press Save counts.

- Press "No expected counts" for a series that should never be compared.

Features

- A locked match survives every later lookup until you unlock it.

Edge cases

- TVmaze numbers anime by broadcast season while AniList lists each cour separately; pick whichever matches how your folders are laid out.

Messages and what they mean

Message	Meaning and what to do
Nothing found	The service had no series for those words. Shorten them or try the other service.

4.3 Collect dialog

Says what you are collecting of one series, so a long runner you joined late does not fill the Missing page with episodes you never meant to keep. No file is touched.

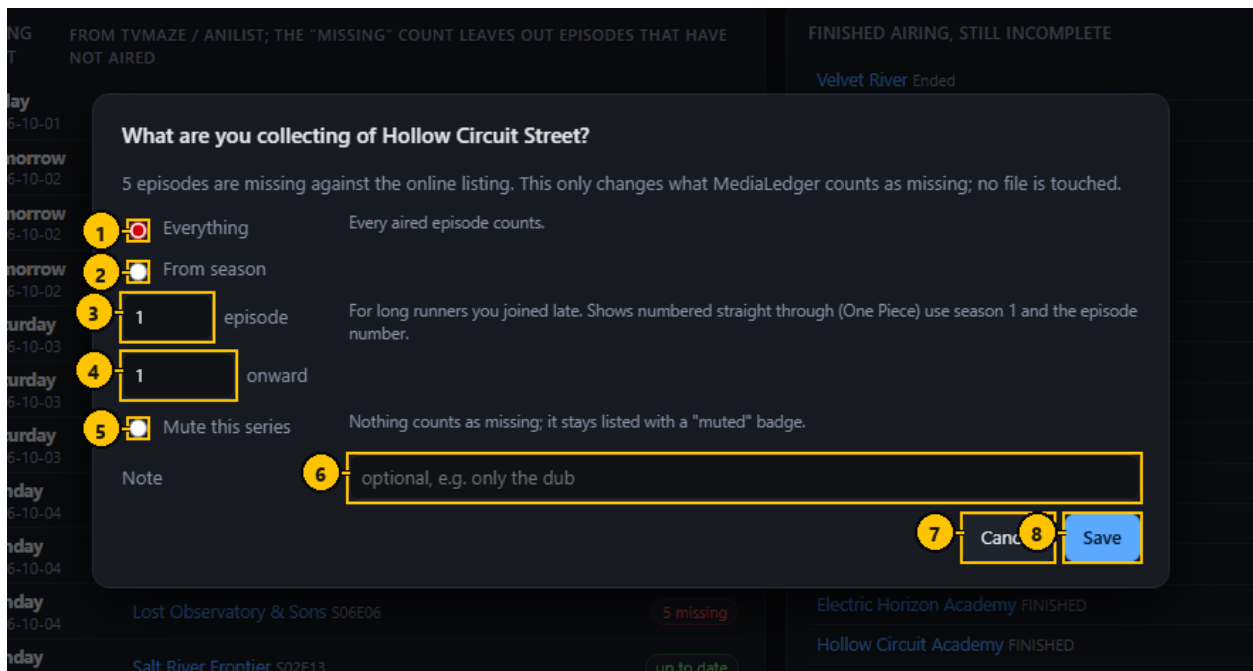


Figure 19. Collect dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Everything	Option	Every aired episode counts.	–	selected	–
2	From a season and episode onward	Option	Earlier seasons, and earlier episodes of that season, are not counted.	–	–	–
3	Season	Number field	The first season you collect.	0 or more	1	–
4	Episode	Number field	The first episode you collect in that season.	1 or more	1	–
5	Mute this series	Option	Nothing counts as missing.	–	–	The series stays listed.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Note	Text field	A reminder for yourself.	Up to 200 characters	empty	–
7	Cancel	Button	Closes without saving.	–	–	–
8	Save	Button	Saves the choice.	–	–	–

Typical workflow

1. Choose Everything, From a season and episode onward, or Mute.
2. Optionally type a note to remind yourself why.
3. Press Save.

Features

- The row on the Missing page keeps a badge with the full count in its tooltip.

Edge cases

- For series numbered straight through, use season 1 and the episode number.
- Choosing Everything removes the choice.

4.4 Issues: Problems

Everything the scan could not make sense of, in one place: names it could not read, files ffprobe could not open, files that vanished, episodes filed under Movies, and the fixes you have saved.

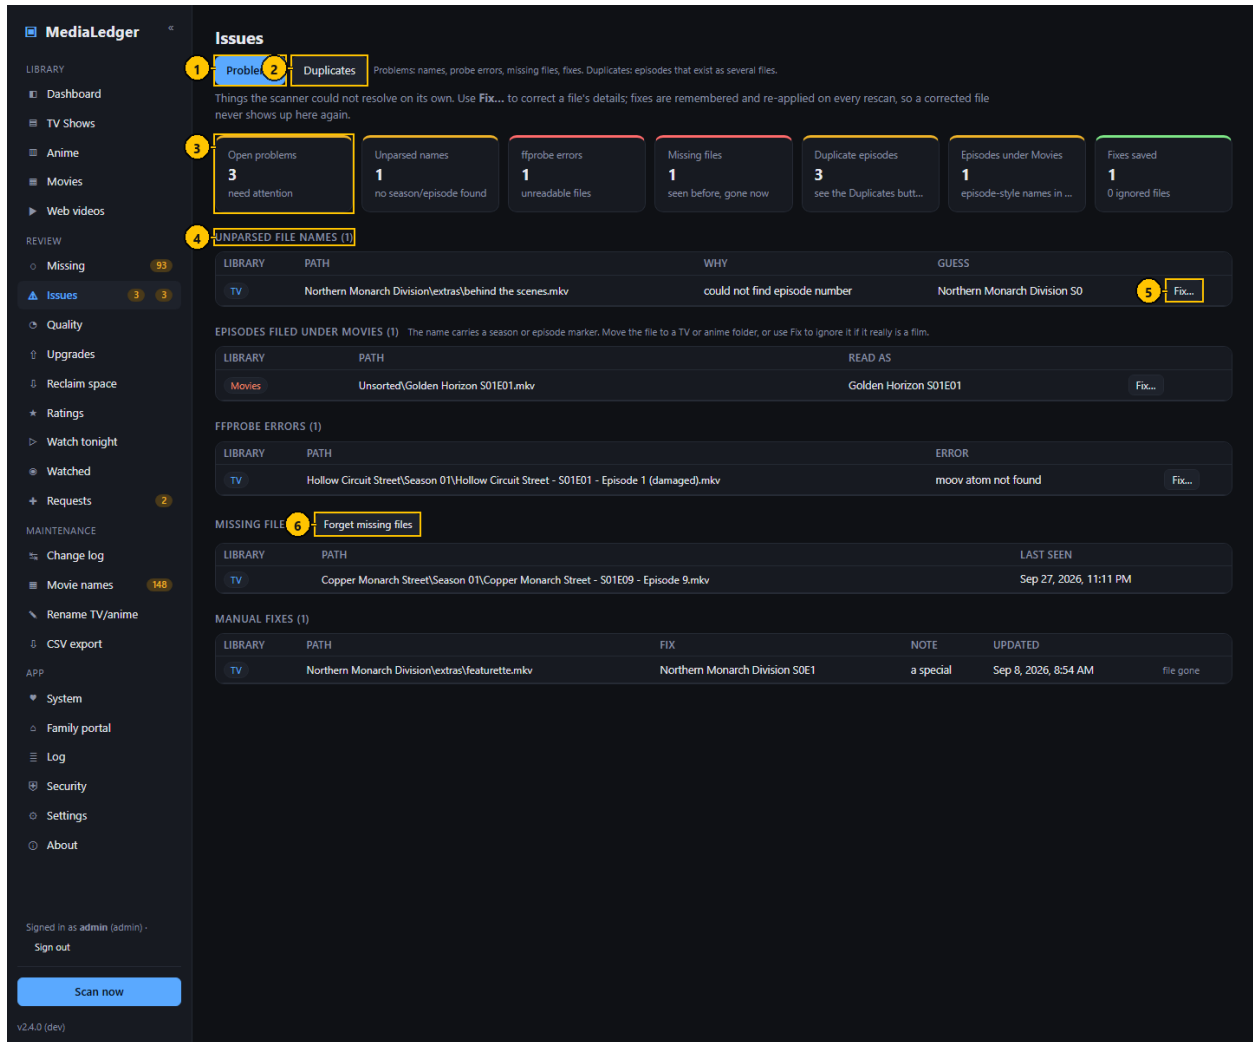


Figure 20. Issues: Problems. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Problems tab	Tab	This page.	—	selected	—
2	Duplicates tab	Tab	Opens the Duplicates tab.	—	—	—
3	Summary tiles	Tiles	Open problems, unparsed names, ffprobe errors, missing files, duplicate episodes, episodes under Movies, fixes saved.	—	—	—
4	Section heading	Heading	Names the kind of problem and counts the rows.	—	—	—
5	Fix	Button	Opens the Fix dialog for that file.	—	—	—
6	Forget missing files	Button	Removes the rows of files that are no longer on the share.	—	—	Only the records are removed; nothing on disk changes.

Typical workflow

1. Start with the tiles to see which kind of problem there is.

2. Press Fix on a row to correct how the file is read, or to ignore it.
3. Move an episode that sits in a movie folder to the right library.
4. Press "Forget missing files" once you are sure the vanished files are gone for good.

Features

- Fixes are stored in the database and applied on every scan, so they survive a rescan and a rename.

Edge cases

- A bare "Episode 1" in a movie name is not flagged, so numbered film series are safe.

Messages and what they mean

Message	Meaning and what to do
moov atom not found	ffprobe could not read the file: it is incomplete or damaged.
no season or episode found in the name	The name has no recognisable marker. Use Fix.

4.5 Fix dialog

Tells MediaLedger how a file should be read when its name does not say. The fix is a record in the database; the file itself is not changed.

Fix episode details
Northern Monarch Division\extras\behind the scenes.mkv

Parser currently thinks: Northern Monarch Division no episode · could not find episode number

Series: 1 Northern Monarch Division

Season: 2 0

Episode: 3 [] 4 (double ep)

Episode title: 5 []

Ignore this file: 6 ☐ Not a media file to track (sample, trailer, junk). Hidden from lists and CSVs.

Note: 7 optional

8 Cancel 9 Save fix

Saved fixes are stored in MediaLedger's database and re-applied on every future scan, even if the file is re-indexed. The file on the share is not touched.

Figure 21. Fix dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Series	Text field	The series the file belongs to.	Text	The current reading	For a movie this field is the title.
2	Season	Number field	The season number.	0 for specials	The current reading	–
3	Episode	Number field	The episode number.	1 or more	The current reading	–
4	Last episode	Number field	For a file that holds two episodes: the number of the second.	–	empty	–
5	Episode title	Text field	The name of the episode.	–	empty	Used by the rename pages.
6	Ignore this file	Check box	Hides the file from every list and count.	–	off	It is listed under Manual fixes.
7	Note	Text field	Why the fix was made.	–	empty	–
8	Cancel	Button	Closes without saving.	–	–	–
9	Save fix	Button	Saves the fix and applies it at once.	–	–	–

Typical workflow

1. Correct the series, season and episode, or the title and year of a movie.
2. Tick "Ignore this file" for a sample, trailer or junk file.
3. Press Save fix. The file is read that way from now on.

Features

- The dialog shows what the parser currently thinks and why it gave up.

Edge cases

- A fix follows the file by its path; renaming through MediaLedger keeps the fix attached.

4.6 Issues: Duplicates

Episodes that exist in more than one file, shown side by side so you can decide which to keep.

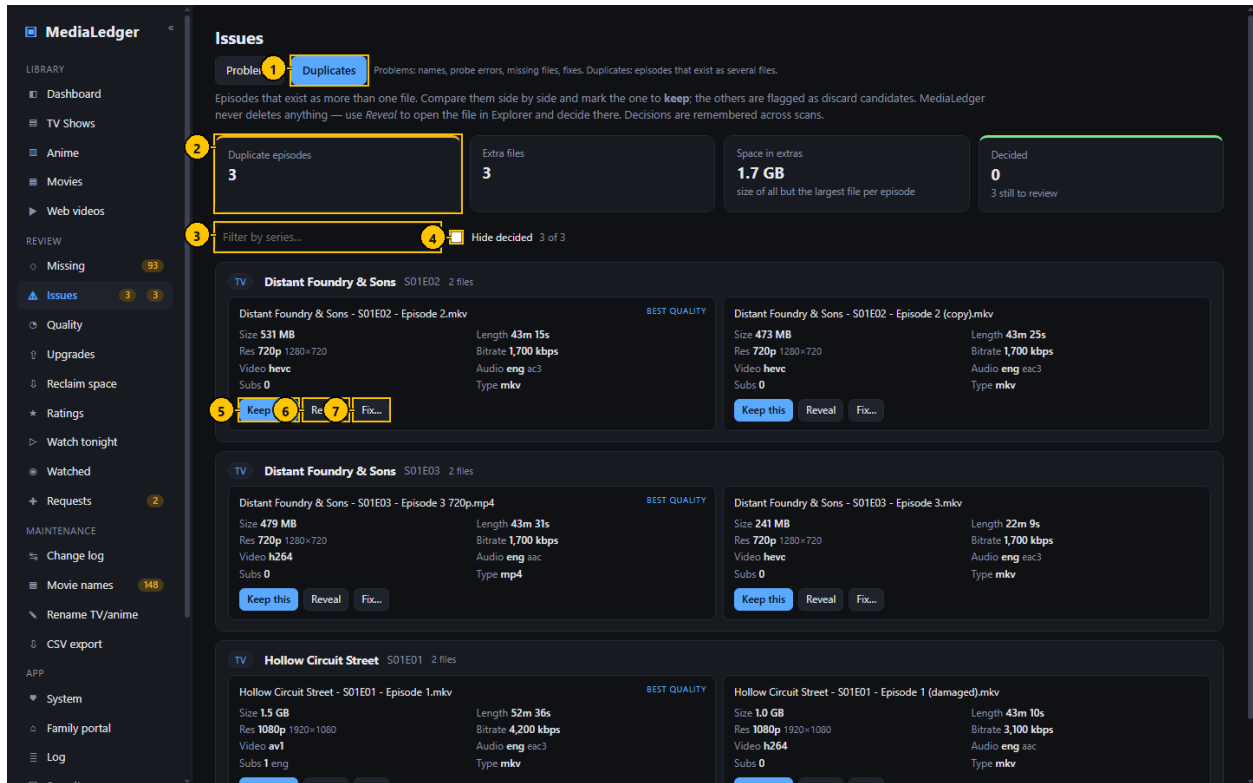


Figure 22. Issues: Duplicates. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Duplicates tab	Tab	This page.	—	—	—
2	Summary tiles	Tiles	Duplicate episodes, extra files and the space they take, decided and still to review.	—	—	—
3	Filter by series	Search field	Keeps the groups of that series.	—	empty	—
4	Hide decided	Check box	Hides the groups you have decided on.	—	off	—
5	Keep this	Button	Marks this copy as the one to keep.	—	—	—
6	Reveal	Button	Shows the file in its folder.	—	—	Desktop only; does nothing in a browser.
7	Fix	Button	Opens the Fix dialog, for a copy that is really a different episode.	—	—	—

Typical workflow

1. Compare the copies: resolution, bitrate, size, languages.
2. Press "Keep this" on the copy you want. The others are marked as the ones to remove.
3. Remove the others yourself; MediaLedger never deletes media.

Features

- "Hide decided" keeps the list to the ones still to review.

Edge cases

- A decision is a note, not an action. Nothing on the share changes.

4.7 Quality

Finds the weak copies: series in mixed resolutions, files with a low bitrate for their resolution, audio without a language, files with no audio, and very short files.

Quality

Files and series whose technical quality looks off: seasons that mix resolutions, files whose bitrate is unusually low for their resolution, and files with no audio, no language tag or a suspiciously short runtime. Thresholds (kbps): 4K < 6000 · 1440p < 3000 · 1080p < 1500 · 720p < 700 · 576p < 400 · 480p < 350 · SD < 250 — change them in Settings.

Summary Tiles:

- Mixed-resolution series: 10
- Mixed seasons: 29 (one season, several resolutions...)
- Low-bitrate files: 86
- Undefined audio language: 0
- No audio track: 0
- Under 2 minutes: 0 (samples, trailers, broken files)

MIXED-RESOLUTION SERIES (10)

LIBRARY	SERIES	FILES	RESOLUTIONS	CODECS
TV	Velvet Lantern Division	108	480p 720p	av1 h264 hevc
TV	Lost Signal Division	64	480p 720p	hevc h264 av1
Anime	Salt River Chronicle	48	1080p 720p	hevc h264 av1
TV	Northern Monarch Division	47	720p 1080p	hevc av1 h264
TV	Amber Signal	44	480p 720p	h264 hevc av1
TV	Iron Horizon Street	40	480p 720p	h264 av1 hevc
TV	Distant Garden Division	37	480p 720p	hevc av1 h264
Anime	Seventh Meridian Chronicle	36	480p 720p	h264 hevc av1
Anime	Winter Garden Frontier	35	1080p 720p	hevc h264 av1
Anime	Paper Harbor	8	480p 720p	h264 av1 hevc

MIXED SEASONS (29)

LIBRARY	SERIES	SEASON	FILES	RESOLUTIONS
TV	Amber Signal	S1	22	480p 720p
TV	Amber Signal	S2	22	480p 720p
TV	Distant Garden Division	S1	10	480p 720p
TV	Distant Garden Division	S2	10	480p 720p
TV	Distant Garden Division	S3	10	480p 720p
TV	Distant Garden Division	S4	7	480p 720p
TV	Iron Horizon Street	S1	10	480p 720p
TV	Iron Horizon Street	S2	10	480p 720p
TV	Iron Horizon Street	S3	10	480p 720p
TV	Iron Horizon Street	S4	10	480p 720p
TV	Lost Signal Division	S1	13	480p 720p
TV	Lost Signal Division	S2	13	480p 720p
TV	Lost Signal Division	S3	13	480p 720p

LOW-BITRATE FILES (86)

LIBRARY	PATH	RES	KBPS	CODEC	LENGTH	SIZE	
TV	Electric Station/Season 01/Electric Station - S01E11 - Episode 11.mkv	1080p	1,085 / 1500	hevc	43m 44s	359 MB	Fix...
TV	Electric Station/Season 03/Electric Station - S03E06 - Episode 6.mkv	1080p	1,085 / 1500	hevc	22m 54s	166 MB	Fix...

Figure 23. Quality. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Mixed-resolution series, low-bitrate files, undefined audio language, no audio track, under two minutes.	—	—	—
2	Section heading	Heading	Names the kind of finding and counts the rows.	—	—	—
3	Column heading	Sortable heading	Sorts that section.	—	—	—
4	Fix	Button	Opens the Fix dialog for that file.	—	—	—

Typical workflow

1. Read the tiles.
2. Open a section and sort by the column that matters.
3. Click a row to open the title.

Features

- The bitrate thresholds per resolution are set under Settings, Quality thresholds.

Edge cases

- "Undefined audio language" means the track has no language tag, not that the audio is missing.

4.8 Upgrade candidates

Ranks the titles most worth replacing with a better copy: those you watch and rate highly but hold in a low resolution or bitrate.

Figure 24. Upgrade candidates. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Worth upgrading, not worth it, and the totals behind them.	—	—	—
2	Filter	Search field	Keeps the titles that contain what you type.	—	empty	—
3	Column heading	Sortable heading	Sorts the table.	—	Score, highest first	—
4	Title	Cell	The title and its library.	—	—	—

Typical workflow

1. Work from the top of the list.
2. Read the reasons beside each score.
3. Click a row to open the title.

Features

- The score multiplies how far the copy falls short of 1080p (plus a low bitrate) by how much you care: plays, your stars, and the online rating.
- 4K and HDR copies score zero, and so does a title that was never played, is unrated and has a fine bitrate.

Edge cases

- Without a Plex sync there are no plays, so only your stars and the online rating count.

4.9 Reclaim space

The mirror image of Upgrades: large titles nobody on the Plex server has played for a long time, or ever. It is a list to think about; MediaLedger never deletes media.

Figure 25. Reclaim space. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Not played for	Drop-down list	How long a title must have gone unplayed, and how long it must have been in the library.	6, 12, 24 or 36 months	12 months	Remembered in this browser.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	At least	Number field	The smallest total size of a title worth listing, in gigabytes.	0 or more	2	–
3	Summary tiles	Tiles	Candidates, the space they hold together, how many were never played, free space now.	–	–	–
4	Column heading	Sortable heading	Sorts the table.	–	Size, largest first	–

Typical workflow

1. Choose the period and the smallest size worth listing.
2. Sort by size and work from the top.
3. Click a row to open the title.

Features

- "Played" covers every Plex account, from the play history.
- Titles you rated four stars or higher are left out.

Edge cases

- "Added" is the older of the file's own date and the day MediaLedger first saw it, so a young ledger does not make everything look new.
- On a machine with no Plex sync every title reads as unplayed; the page says so rather than imply the whole library is dead weight.

Messages and what they mean

Message	Meaning and what to do
None of these titles is linked to Plex on this machine	There is no play data behind the list. Sync Plex here, or open the page on the server that does.

4.10 Ratings

Your own rating and note for every title, next to the online rating and your Plex rating.

Figure 26. Ratings. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Titles, rated by you with the average, rated in Plex, online ratings known.	—	—	—
2	Library	Drop-down list	Keeps one library.	all libraries, TV, Anime, Movies, Web channels	all libraries	—
3	Rated by me	Check box	Keeps the titles you have rated.	—	off	—
4	With my Plex rating	Check box	Keeps the titles you rated in Plex.	—	off	—
5	Not rated yet	Check box	Keeps the titles you have not rated.	—	off	—
6	Filter	Search field	Keeps the titles that contain what you type.	—	empty	—
7	Stars	Rating control	Your rating of the title.	1 to 5 stars	none	Click the same star again to clear.
8	Note	Text field	A note of your own.	Free text	empty	Saved when you leave the field.

Typical workflow

1. Click a star to rate; click the same star again to clear.
2. Type a note and leave the field to save it.
3. Use the check boxes to list only what you rated, or only what you have not.

Features

- Your stars and notes are exported in the series and movie CSV files.
- Stars feed the Upgrades ranking and protect titles on the Reclaim page.

Edge cases

- Your notes are never shown on the family portal; your stars are, unless you switch that off there.

4.11 Watch tonight

One list across every series and movie, made for the "what shall we watch" moment.

TITLE	TAGS	LENGTH	UNWATCHED	COMPLETE	MINE	RATING	BEST	ADDED
TV Hollow Circuit Street	Family Adventure Romance	40 min × 128	62 of 128	gaps	★★★★★	6.6	1080p	5 days ago
TV Golden Horizon	Crime Comedy Family rewatch	39 min × 132	not in Plex	yes	★★★★★	8.6	720p	5 days ago
Anime Quiet Signal Academy	Romance Mystery Comedy Isekai Dual audio	25 min × 34	10 of 34	gaps	★★★★★	7.9	1080p	5 days ago
TV Paper Tide Division	Adventure Romance Mystery background	40 min × 88	88 of 88	yes	★★★★★	8.8	1080p	5 days ago
Anime Velvet River Chronicle	Adventure Documentary Mecha Subbed	25 min × 24	19 of 24	yes	★★★★★	6.3	1080p	5 days ago
TV Lost Observatory & Sons	Romance Documentary Mystery rewatch	40 min × 55	55 of 55	gaps	★★★★★	6.2	1080p	5 days ago
Anime Electric Monarch Academy	Science Fiction Mystery Documentary Dual audio	25 min × 36	not in Plex	yes	★★★★★	7.9	480p	5 days ago
Anime Quiet Observatory Frontier	Comedy Science Fiction Romance School Subbed	24 min × 24	24 of 24	yes	★★★★★	6.1	1080p	5 days ago
TV Distant Garden Division	Family Drama Adventure rewatch	43 min × 37	37 of 37	gaps	★★★★★	8.1	720p	5 days ago
TV Distant Garden	Action Drama Mystery	39 min × 78	2 of 78	yes	★★★★★	8.1	1080p	5 days ago
TV Iron Meridian	Action Thriller background	38 min × 22	22 of 22	yes	★★★★★	7.8	1080p	5 days ago
Anime Quiet Harbor	Comedy Adventure Fantasy Mecha Subbed	25 min × 36	36 of 36	yes	★★★★★	7.5	480p	5 days ago
TV Northern Monarch & Sons	Drama Action Science Fiction background	43 min × 63	62 of 63	gaps	★★★★★	8.5	720p	5 days ago
Movie Glass Monarch (1973)	Science Fiction Comedy	1h 30m	yes		★★★★★	6.7	4K	5 days ago
Anime Seventh Archive Academy	Thriller Mystery Romance School Subbed	24 min × 48	25 of 48	yes	★★★★★	6.5	1080p	5 days ago
Anime Salt River Frontier	Romance Science Fiction Comedy Mecha Dubbed	24 min × 24	24 of 24	yes	★★★★★	6.2	480p	5 days ago
Anime Crimson Canyon Chronicle	Comedy Adventure Fantasy Isekai Subbed	25 min × 33	29 of 33	gaps	★★★★★	6.2	720p	6 days ago

Figure 27. Watch tonight. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Kind	Drop-down list	Series, movies or both.	—	series and movies	—
2	Unwatched only	Check box	Keeps the titles with something left to watch.	—	on	From Plex play counts.
3	Complete series only	Check box	Keeps the series with no missing episodes.	—	off	—
4	Up to ... minutes	Number field	The longest length you have time for.	Minutes, in steps of 5	any	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
5	My rating at least	Drop-down list	Keeps the titles you rated that high or higher.	any, 1 to 5 stars	any	–
6	Pick for me	Button	Chooses one title at random from the filtered list.	–	–	–
7	Genre	Drop-down list	Keeps the titles with that genre.	–	any genre	–
8	Tonight	Card	The title that was picked, with its poster, length and rating.	–	–	–
9	Open	Button	Opens the picked title.	–	–	–
10	Pick another	Button	Picks again.	–	–	–

Typical workflow

1. Choose series, movies or both.
2. Leave "unwatched only" ticked, set how long you have, and pick a genre or tag.
3. Press "Pick for me" to have one chosen at random from what is left.
4. Press Open to go to the title, or Pick another.

Features

- The choices are remembered in this browser.
- Length is the episode length for a series and the running time for a movie.

Edge cases

- Titles Plex does not have stay in the list when "unwatched only" is ticked, because nothing says they were watched.
- "Complete series only" needs an online match; unmatched series are left out.

Messages and what they mean

Message	Meaning and what to do
Nothing matches; loosen the filters	No title passes every filter.

4.12 Watched

The play history of the whole Plex server: who watched what, when, and on which device.

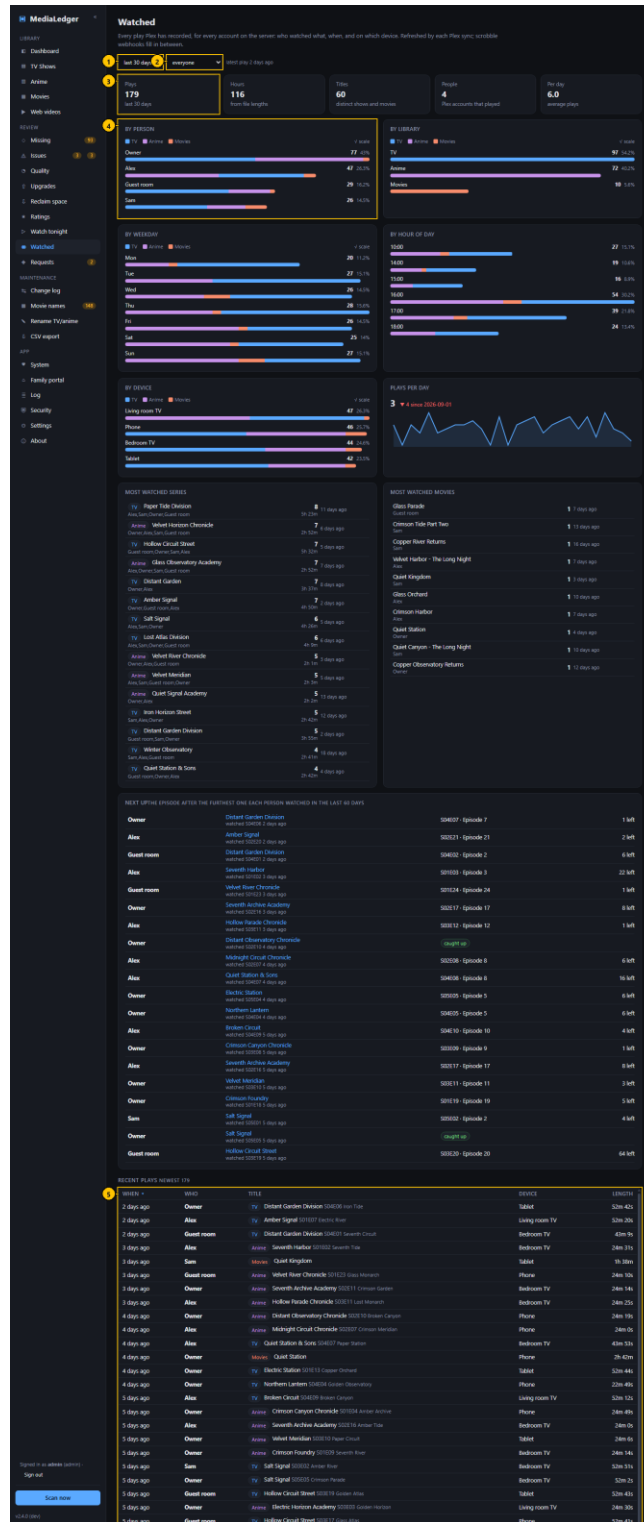


Figure 28. Watched. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Period	Drop-down list	The period the page covers.	last 7, 30 or 90 days, last year, all time	last 30 days	Remembered in this browser.
2	Person	Drop-down list	Keeps the plays of one Plex account.	Every account, with its play count	everyone	–
3	Summary tiles	Tiles	Plays, hours (from the lengths of the files), distinct titles, people, average plays per day.	–	–	–
4	Charts	Charts	By person, by library, by weekday, by hour of day, by device, and plays per day.	–	–	Weekday and hour use a linear scale.
5	Recent plays	Table	The newest plays: when, who, title, device, length.	–	500 rows	Searchable and sortable.

Typical workflow

1. Choose the period and, if you like, one person.
2. Read the tiles and the charts.
3. Scroll to Recent plays and search it; click a row to open the title.

Features

- Charts by person, library, weekday, hour of day and device, and plays per day.
- Most watched series and movies with who watched them.
- Next up: for each person and show, the episode after the furthest one they watched in the last 60 days.
- Binges: sittings of three or more episodes of one show.

Edge cases

- Plays are attributed by Plex account; a shared account shows as one person.
- Plex keeps history only as far back as its own setting allows.
- Each Plex sync pulls new history; the webhook adds plays in between and the next sync replaces those rows with Plex's own, so nothing is counted twice.

Messages and what they mean

Message	Meaning and what to do
Nothing here yet	No history has been pulled. Run a Plex sync.

4.13 Requests

A wish list for the library. Anyone who can open the application may ask for a title; only an administrator decides.

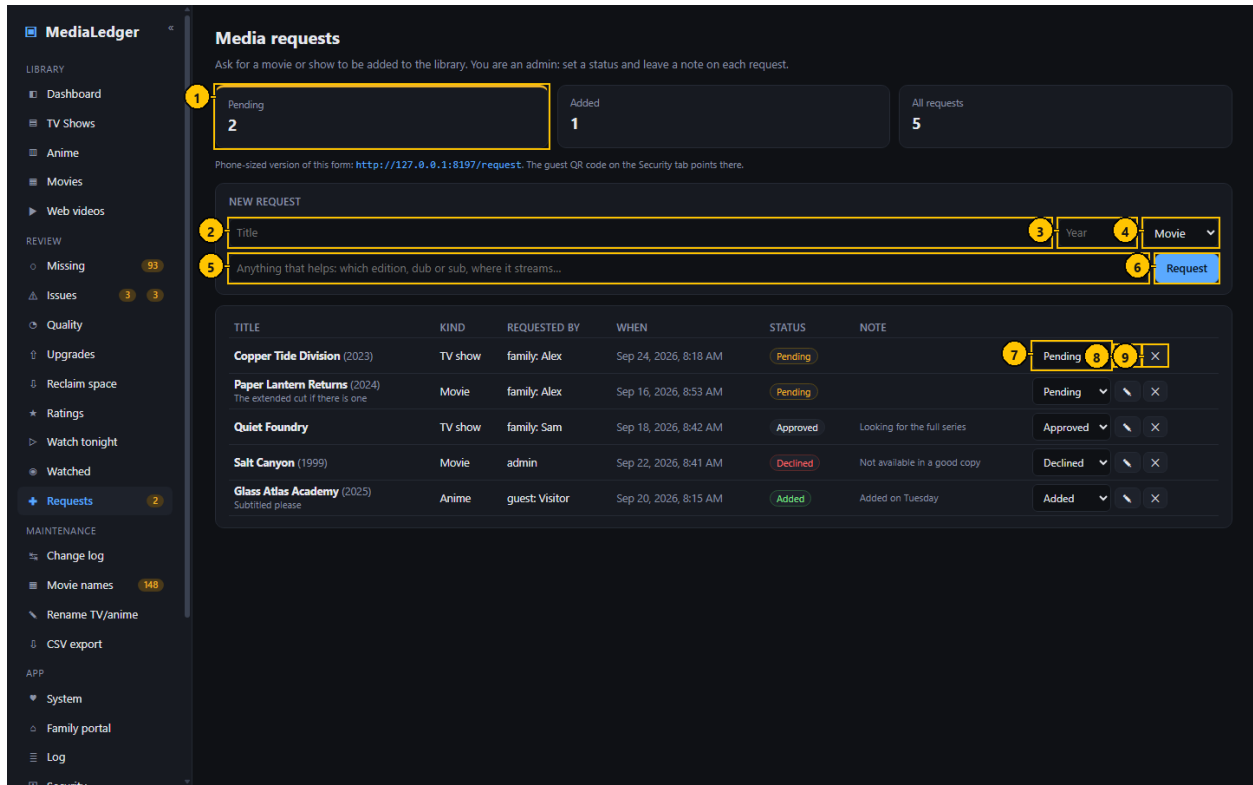


Figure 29. Requests. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Pending, added and all requests.	—	—	—
2	Title	Text field	What is being asked for.	Up to 120 characters	empty	—
3	Year	Number field	The year of release, to tell remakes apart.	1900 to 2100	empty	Optional.
4	Kind	Drop-down list	Movie, TV show, Anime or Other.	—	Movie	—
5	Note	Text field	Edition, dub or sub, where it streams.	Free text	empty	Optional.
6	Request	Button	Files the request.	—	—	—
7	Status	Drop-down list	Sets the status of that request.	Pending, Approved, Added, Declined	Pending	Administrators only.
8	Note to the requester	Button	Writes a note the requester can read.	—	—	Administrators only.
9	Delete	Button	Deletes the request.	—	—	Administrators only. Asks first.

Typical workflow

1. Type the title, the year if you know it, the kind, and anything that helps.
2. Press Request.
3. As an administrator: set the status, leave a note for the person who asked, or delete the request.

Features

- Statuses: Pending, Approved, Added, Declined.
- Requests from the family portal arrive marked "family:" and the name on the invite; guests type their own name.
- A notification is sent for every new request when notifications are set up.

Edge cases

- Requests do not download anything and do not talk to Plex.

4.14 Request page for phones

A page with nothing on it but the request form, sized for a phone. The guest QR code on the Security page points here.

 **MediaLedger**

Ask for something

A movie or show you would like added to the library. Whoever runs it sees the list and marks what happens.

TITLE

1

KIND

2

Movie

YEAR (IF YOU KNOW IT)

3

ANYTHING THAT HELPS

4

5

Send request

[Open the full site](#)

Figure 30. Request page for phones. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Title	Text field	What should be added.	Up to 120 characters	empty	–
2	Kind	Drop-down list	Movie, TV show, Anime or Other.	–	Movie	–
3	Year	Number field	The year of release.	–	empty	Optional.
4	Note	Text area	Anything that helps.	–	empty	Optional.
5	Send request	Button	Files the request.	–	–	–

Typical workflow

1. Scan the QR code or open the address ending in /request.
2. Type your name once; the phone remembers it.
3. Type the title and press Send request.

Edge cases

- Guest access must be enabled on the Security page, otherwise the page asks the visitor to sign in.

Maintenance

The tools that change things. The two rename pages are the only part of MediaLedger that writes to your share.

5.1 Change log

What each scan found: files added, removed, modified and returned. It is how you notice that a folder emptied or a batch of files was replaced.

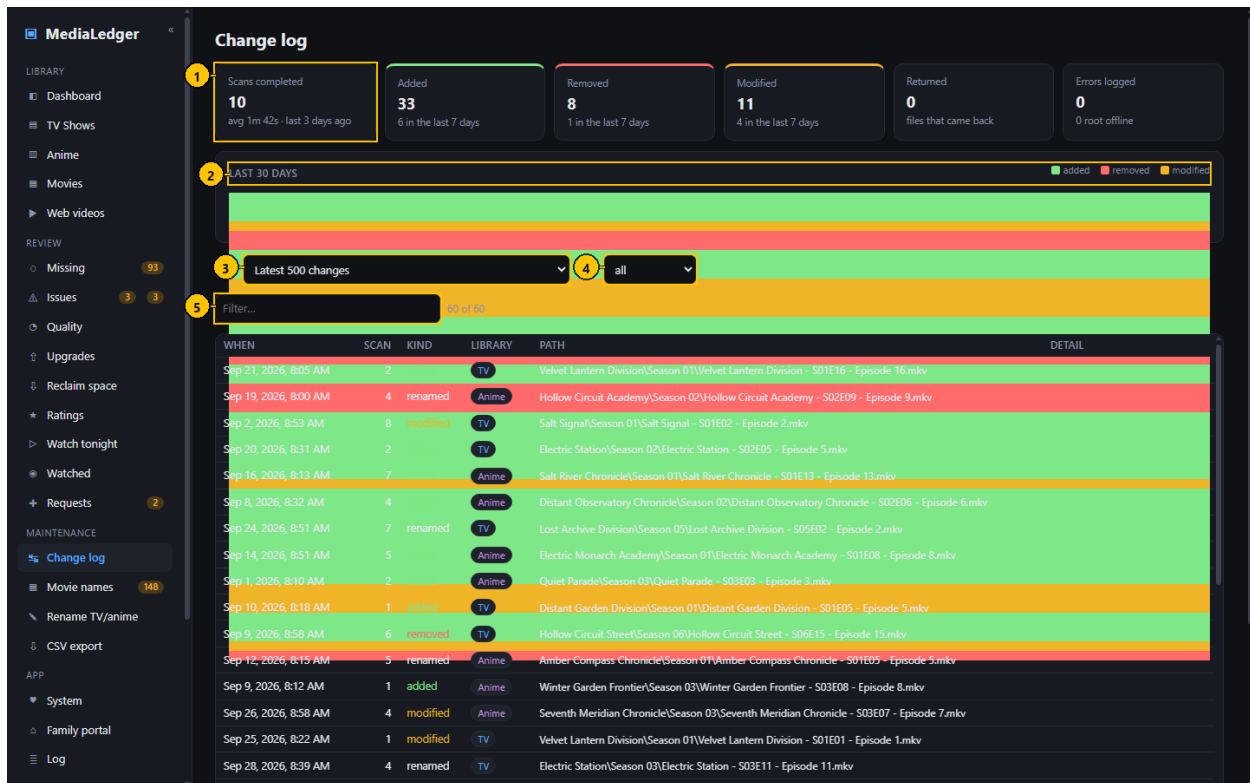


Figure 31. Change log. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Scans completed with their average length, and files added, removed and modified.	—	—	—
2	30-day chart	Chart	Changes per day by kind.	—	—	—
3	Scan	Drop-down list	Shows the changes of one scan.	The latest 500 changes, or any recent scan	Latest 500 changes	—
4	Kind	Drop-down list	Keeps one kind of change.	added, removed, modified, returned, probe error, renamed	all	—
5	Filter	Search field	Keeps the paths that contain what you type.	—	empty	—

Typical workflow

1. Read the tiles and the 30-day chart.
2. Pick one scan, or leave it on the latest 500 changes.
3. Pick a kind and type in the filter box to narrow the list.

Features

- "returned" marks a file that had vanished and came back.
- Renames made through MediaLedger are recorded as renames, not as a removal and an addition.

Edge cases

- "modified" means the size or the date of the file changed; the file is probed again.

5.2 Movie names

Proposes tidy names for movie files and renames them in batches. With Rename TV / anime it is the only part of MediaLedger that writes to your share.

Movie names

Builds Title (Year) - Source Resolution HDR Codec [Audio] [[edition-]].ext from the parsed title and year plus probed resolution, colour, codec and audio. Anything the probe cannot prove becomes a placeholder word for you to fill in; anything unsafe is blocked. Every batch is a dry run unless you flip the live switch, is pre-flighted as a whole, verified file by file, journaled, and can be undone.

Summary:

- Ready: 148 (would be renamed)
- Already correct: 0
- Blocked: 2 (never renamed until fixed)
- With placeholders: 1 (Year / Source words in the n...)
- Flagged: 44 (renamed, but worth a look)
- Live renames: **ALLOWED** (the switch below is armed)

BATCH SETTINGS

Layout: **rename in place** | Batch: **200** | Title & year: **file name + my fixes** | **Allow live ren** | **Save**

Folder layout copies, verifies size and a head/tail hash, then deletes the original. In-place uses an atomic rename.

Name: **Title (Year)** | Resolution | Source | HDR/SDR | Codec | [Audio] | [edition] | Sub/Dub

Click a part to leave it out or put it back; + - move it. The same works by clicking a word in any proposed name below. Preview: Movie (2019) - 1080p.mkv

Filters:

- Filter: **ready** | any flag | 148 of 150
- 15 Dry run | 16 Rename 0 | 17 One at a time
- 10 Select all | 11 5 | 12 Select sh | 13 C | 14 Set source for selected...

CURRENT NAME	PROPOSED NAME	FLAGS
Amber Canyon - The Long Night (1987).mkv Amber Canyon - The Long Night (1987)	→ Amber Canyon - The Long Night (1987) - 480p.mkv	Fix... Rename
Amber Lantern (1971).mkv Amber Lantern (1971)	→ Amber Lantern (1971) - 4K.mkv	Fix... Rename
Amber Meridian (2019).mkv Amber Meridian (2019)	→ Amber Meridian (2019) - 4K.mkv	Fix... Rename
Amber Observatory Part Two (2006) - Extended.mkv Amber Observatory Part Two (2006)	→ Amber Observatory Part Two (2006) - 4K.mkv	Fix... Rename
Amber Observatory Part Two (2006).mkv Amber Observatory Part Two (2006)	→ Amber Observatory Part Two (2006) - 720p.mkv	Fix... Rename
Amber Parade (2012).mkv Amber Parade (2012)	→ Amber Parade (2012) - 4K.mkv	Fix... Rename
Amber Station (1971).mkv Amber Station (1971)	→ Amber Station (1971) - 480p.mkv	Fix... Rename
Amber Tide (1973).mkv Amber Tide (1973)	→ Amber Tide (1973) - 1080p.mkv	Fix... Rename
Amber Tide Part Two (2020).1080p.BluRay.x264.mkv Amber Tide Part Two	→ Amber Tide Part Two (2020) - 1080p.mkv	Fix... Rename
Broken Atlas Returns.1979.2160p.WEB-DL.x264.mkv Broken Atlas Returns	→ Broken Atlas Returns (1979) - 1080p.mkv	res_mismatch:4K→1080p Fix... Rename
Broken Compass (1980) - Extended.mkv Broken Compass (1980)	→ Broken Compass (1980) - 4K.mkv	Fix... Rename
Broken Compass.1980.2160p.HDTV.x264.mkv Broken Compass	→ Broken Compass (1980) - 480p.mkv	res_mismatch:4K→480p Fix... Rename
Broken Meridian Returns.2011.1080p.WEB-DL.x264.mkv Broken Meridian Returns	→ Broken Meridian Returns (2011) - 4K.mkv	res_mismatch:1080p→4K Fix... Rename
Broken Monarch.2026.1080p.WEB-DL.x264.mkv Broken Monarch	→ Broken Monarch (2026) - 1080p.mkv	Fix... Rename
Broken Orchard Part Two (1995).mkv Broken Orchard Part Two (1995)	→ Broken Orchard Part Two (1995) - 480p.mkv	Fix... Rename
Broken River - The Long Night (2024).mkv Broken River - The Long Night (2024)	→ Broken River - The Long Night (2024) - 4K.mkv	Fix... Rename
Copper Garden - The Long Night.1985.720p.BluRay.x264.mkv Copper Garden - The Long Night	→ Copper Garden - The Long Night (1985) - 4K.mkv	res_mismatch:720p→4K Fix... Rename
Copper Observatory Returns (1972).mkv Copper Observatory Returns (1972)	→ Copper Observatory Returns (1972) - 1080p.mkv	Fix... Rename
Copper River Returns (1990).mkv Copper River Returns (1990)	→ Copper River Returns (1990) - 480p.mkv	Fix... Rename
Copper Signal Part Two (1980).mkv Copper Signal Part Two (1980)	→ Copper Signal Part Two (1980) - 1080p.mkv	Fix... Rename
Crimson Atlas.1970.1080p.BluRay.x264.mkv Crimson Atlas	→ Crimson Atlas (1970) - 1080p.mkv	Fix... Rename
Crimson Canyon (1968).mkv Crimson Canyon (1968)	→ Crimson Canyon (1968) - 480p.mkv	Fix... Rename
Crimson Circuit Returns (1987).mkv Crimson Circuit Returns (1987)	→ Crimson Circuit Returns (1987) - 1080p.mkv	Fix... Rename
Crimson Foundry Part Two.2001.720p.HDTV.x264.mkv Crimson Foundry Part Two	→ Crimson Foundry Part Two (2001) - 4K.mkv	res_mismatch:720p→4K Fix... Rename
Crimson Harbor (2022).mkv Crimson Harbor (2022)	→ Crimson Harbor (2022) - 4K.mkv	Fix... Rename
Crimson Harbor - The Long Night (2002).mkv Crimson Harbor - The Long Night (2002)	→ Crimson Harbor - The Long Night (2002) - 4K.mkv	Fix... Rename
Crimson Horizon (1987).mkv Crimson Horizon (1987)	→ Crimson Horizon (1987) - 720p.mkv	Fix... Rename
Crimson Monarch.1992.1080p.BluRay.x264.mkv Crimson Monarch	→ Crimson Monarch (1992) - 720p.mkv	res_mismatch:1080p→720p Fix... Rename
Crimson Tide.2001.2160p.HDTV.x264.mkv Crimson Tide	→ Crimson Tide (2001) - 720p.mkv	res_mismatch:4K→720p Fix... Rename
Crimson Tide Part Two (2015).mkv Crimson Tide Part Two (2015)	→ Crimson Tide Part Two (2015) - 4K.mkv	Fix... Rename
Distant Canyon Part Two.1972.720p.WEB-DL.x264.mkv Distant Canyon Part Two	→ Distant Canyon Part Two (1972) - 1080p.mkv	res_mismatch:720p→1080p Fix... Rename

Figure 32. Movie names. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Ready, flagged, blocked, already tidy, and renamed so far.	—	—	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Layout	Drop-down list	Rename in place, or also move each movie into a folder named "Title (Year)".	–	rename in place	–
3	Batch limit	Number field	The most files one batch may rename.	1 to 5000	200	A safety stop, enforced by the server as well.
4	Source of the title	Drop-down list	Whether the name is built from the file name and your fixes, or from the Plex match.	–	file name + my fixes	–
5	Live renaming allowed	Check box	Arms the live button. While it is off only dry runs are possible.	–	off	–
6	Save	Button	Saves the batch settings.	–	–	–
7	Name parts	Chips	Click a part to leave it out of the name or put it back.	Title (Year) is fixed; Source, Resolution, Dynamic range, Codec, Audio, Edition and Sub/Dub are optional	Source, Resolution, Dynamic range, Codec, Audio, Edition	The proposed names update at once.
8	Filter	Search field	Keeps the files that contain what you type.	–	empty	–
9	Status	Drop-down list	Keeps ready, flagged, placeholder or blocked files.	–	ready	–
10	Select next	Button	Clears the selection and ticks only the next group of listed files.	–	–	After the batch those files leave the list, so pressing it again takes the following group.
11	How many	Number field	The size of the group "Select next" ticks.	1 to 200	10	Remembered in this browser.
12	Select shown	Button	Ticks every ready file in the list.	–	–	Asks first above 50.
13	Clear	Button	Unticks everything.	–	–	–
14	Set source for selected	Drop-down list	Records where the ticked copies came from, for the Source part of the name.	Web, Rip, Broadcast and others	–	–
15	Dry run	Button	Runs the batch without touching any file and records the result.	–	–	–
16	Rename live	Button	Renames the ticked files.	–	–	Disabled until live renaming is allowed.
17	One at a time	Button	Walks through the ticked files, asking before each.	–	–	–

Typical workflow

1. Choose the parts of the name by clicking the chips; the preview shows the result.
2. Set the layout and the batch limit and press Save.
3. Press "Select next" to tick a small group, check the proposed names.
4. Press "Dry run" first: it records what would happen and changes nothing.
5. Press "Rename live" when the dry run looks right.
6. Use Undo in the Batches table if you change your mind.

Features

- Every file is Ready, Flagged or Blocked. Blocked files are never renamed until the cause is fixed.
- A batch is checked as a whole before anything is renamed: the file is still there, its size is unchanged, the new name is free, the folder is writable.
- Each rename is verified and written to a journal. The Batches table at the bottom of the page lists every batch with its mode, status and counts; Items lists its files and Undo renames them back after checking each one.

Edge cases

- "Select shown" asks first when more than 50 files would be ticked.
- Two files that would end up with the same name are listed under Name collisions and neither is renamed.
- Renaming is off until you switch it on under Settings, Renaming.

Messages and what they mean

Message	Meaning and what to do
Renaming is off	Switch it on under Settings, Renaming.
target exists	A file with the proposed name is already there. Nothing is overwritten.
size changed since the scan	The file was altered after it was scanned. Scan again.

5.3 Rename TV / anime

The same batch engine for episodes: proposes "Show - S01E02 - Title" and renames in place.

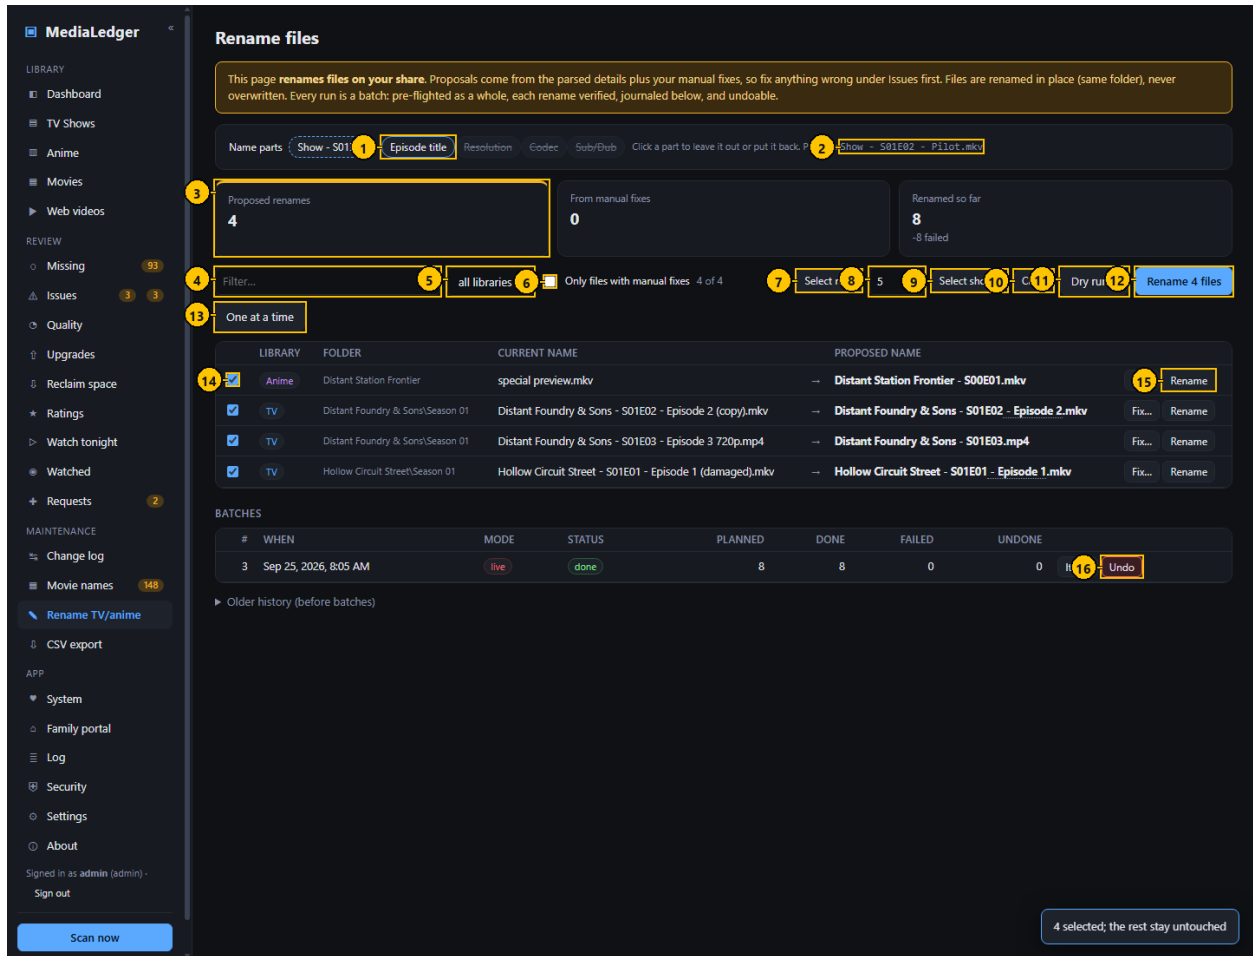


Figure 33. Rename TV / anime. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Name parts	Chips	Click a part to leave it out or put it back.	Episode title, Resolution, Codec, Sub/Dub	Episode title	"Show - S01E02" is fixed, because Plex matches on it.
2	Preview	Label	An example of the name the chosen parts produce.	—	—	—
3	Summary tiles	Tiles	Proposed renames, how many come from your fixes, renamed so far.	—	—	—
4	Filter	Search field	Keeps the files that contain what you type.	—	empty	—
5	Library	Drop-down list	Keeps one library.	—	all libraries	—
6	Only files with manual fixes	Check box	Keeps the files whose proposal comes from a fix of yours.	—	off	—
7	Select next	Button	Clears the selection and ticks only the next group.	—	—	—
8	How many	Number field	The size of that group.	1 to 200	10	Remembered in this browser.
9	Select shown	Button	Ticks every file in the list.	—	—	Asks first above 50.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
10	Clear	Button	Unticks everything.	–	–	–
11	Dry run	Button	Shows what would happen to the ticked files.	–	–	–
12	Rename	Button	Opens the confirmation for the ticked files.	–	–	–
13	One at a time	Button	Walks through the ticked files, asking before each.	–	–	–
14	Tick box	Check box	Includes that file in the batch.	–	off	–
15	Rename this file	Button	Renames that one file after a confirmation.	–	–	–
16	Undo	Button	Renames the files of that batch back.	–	–	–

Typical workflow

1. Choose the name parts with the chips.
2. Set the number beside "Select next" and press it.
3. Check the ticked rows: current name on the left, proposed name on the right.
4. Press "Dry run", then "Rename".
5. Repeat for the next group.

Features

- Files are renamed in their folder, never moved and never overwritten.
- A rename button on each row renames just that file.

Edge cases

- Proposals come from the parsed details plus your fixes, so correct anything wrong under Issues first.
- While a batch runs, scans are held back.

Messages and what they mean

Message	Meaning and what to do
scan skipped: rename batch in progress	A scan was due while a batch was running. It runs at the next opportunity.

5.4 Rename confirmation dialog

The last stop before files are renamed: it lists every file and its new name.

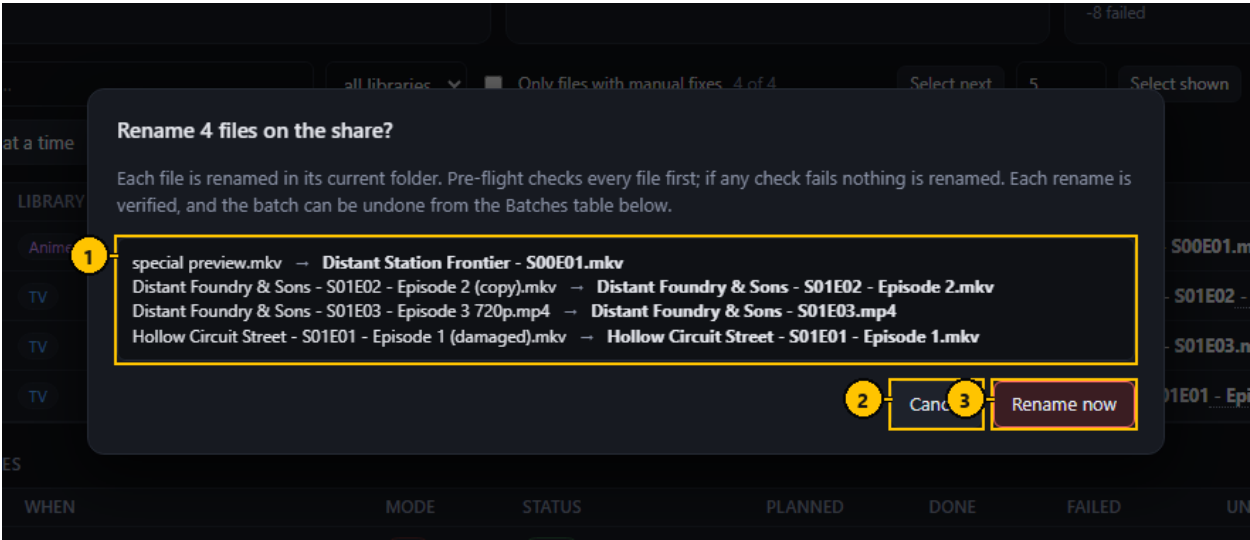


Figure 34. Rename confirmation dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	What will be renamed	List	Each current name and the name it will get.	–	–	–
2	Cancel	Button	Closes without renaming.	–	–	–
3	Rename now	Button	Runs the batch.	–	–	–

Typical workflow

- 1. Read the list.
- 2. Press "Rename now", or Cancel.

Features

- If any check fails, nothing is renamed.

5.5 CSV export

Writes the library to CSV files for a spreadsheet or another tool.

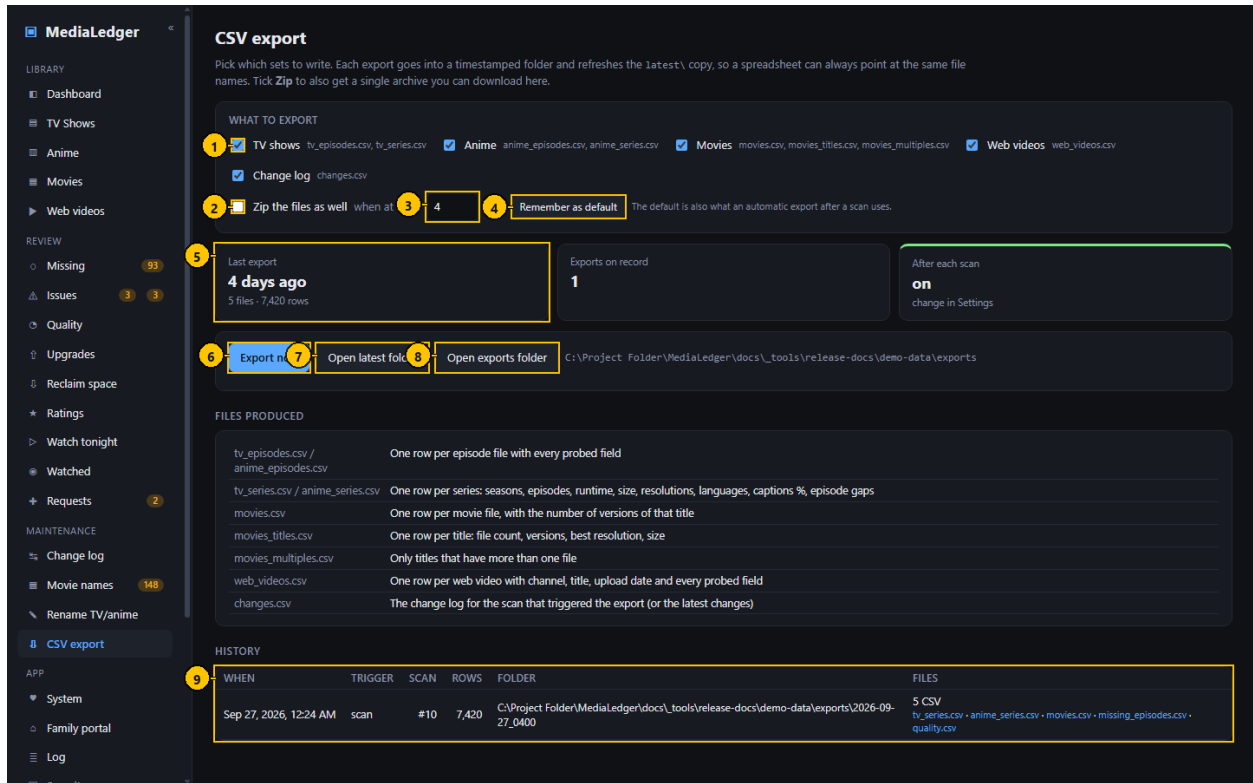


Figure 35. CSV export. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Sets to export	Check boxes	Which files to write.	—	TV, Anime, Movies, Web videos, Changes	—
2	Zip the files	Check box	Puts the files of one export in a single zip file.	—	off	—
3	Zip when more than	Number field	The number of files above which a zip file is made.	1 or more	4	—
4	Remember as default	Button	Saves the ticks for the automatic export.	—	—	—
5	Summary tiles	Tiles	The last export, and whether exports run after each scan.	—	—	—
6	Export now	Button	Writes the ticked sets.	—	—	—
7	Open latest folder	Button	Opens the folder of the newest export.	—	—	Desktop only.
8	Open exports folder	Button	Opens the folder that holds every export.	—	—	Desktop only.
9	History	Table	Past exports with their files; on the web server each file is a download link.	—	—	—

Typical workflow

1. Tick the sets you want.
2. Choose whether to put them in one zip file.

3. Press "Export now".
4. Download the files from History, or open the folder on the desktop.

Features

- Sets: TV series, anime series, movies, episodes, missing episodes, quality, changes, requests and web videos.
- An export can run by itself after every scan.

Edge cases

- A zip file is made only when more files are exported than the number beside the check box.
- Adult titles are left out unless you allow them under Settings, Adult content.

6. Application

The application itself: the machine it runs on, who may use it, and what it has been doing.

6.1 System

Watches the machine MediaLedger runs on. On the Raspberry Pi that is the board itself, where temperature and power matter.

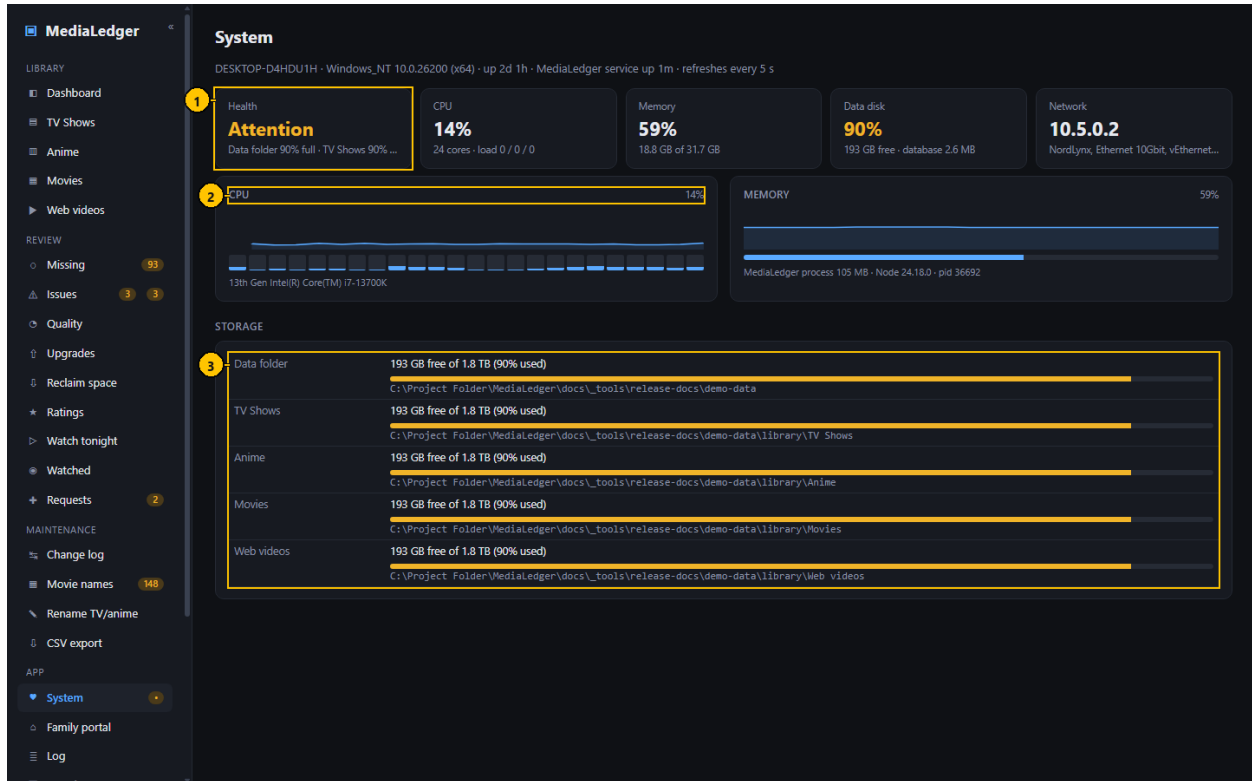


Figure 36. System. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Health, processor, memory, data disk, and on a Raspberry Pi the chip temperature.	—	—	—
2	Charts	Charts	Processor per core, memory, temperature, network.	—	—	—
3	Storage	Table	Free space of every root with a bar.	—	—	—

Typical workflow

1. Read the Health tile: All good, Attention or Problem, with the rules that triggered.
2. Read the charts for the last few minutes.
3. Read Storage for the free space on every root.

Features

- Sampled every five seconds while the page is open.

- On a Raspberry Pi: chip temperature, clock speed, core voltage, throttling and under-voltage.

Edge cases

- The figures in this manual come from the computer the screenshots were made on.

Messages and what they mean

Message	Meaning and what to do
not reachable	A root or disk could not be read. Check the mount.

6.2 Family portal (administration)

Runs the family portal: a second, separate site for people you invite, where they can browse the libraries, pick something for tonight and send requests, and nothing else.

Figure 37. Family portal (administration). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Portal	Tile	Whether the portal is on and listening.	—	—	—
2	Public address	Tile	Whether the public address works, the response time, when it was checked, and the days left on its certificate.	—	—	Amber after one failed check, red after two.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
3	Check the addresses now	Button	Tests both addresses at once.	–	–	–
4	Name	Text field	Who the invite is for. Requests arrive under this name.	Up to 40 characters	empty	–
5	Expires	Drop-down list	How long the invite works.	never, 7 days, 30 days, 1 year	never expires	–
6	May browse, use tonight, request	Check boxes	What the person may do.	–	All three	–
7	Create invite	Button	Creates the invite and shows its link and QR code once.	–	–	Asks for your password again on the web server.
8	New link	Button	Makes a new link; the old link and every device using it stop working.	–	–	–
9	Revoke	Button	Ends that person's access at once.	–	–	–
10	Public address	Text field	What people away from home open.	https://name	empty	With Tailscale Funnel, the address the funnel command prints.
11	Home address	Text field	A name served on your own network.	http:// or https://name	empty	Optional.
12	Portal on	Check box	Starts or stops the portal.	–	off	–
13	Port	Number field	The port the portal listens on.	1024 to 65535	8090	–
14	Reachable from	Drop-down list	This machine only, or the whole network.	–	this machine only	Keep "this machine only" when Caddy or Tailscale is in front.
15	Check the addresses every	Number field	Minutes between automatic checks.	0 (off) or 1 to 1440	15	–
16	Show my star ratings	Check box	Whether the portal shows your stars.	–	on	Your notes are never shown.
17	Save	Button	Saves the addresses and the server settings.	–	–	–
18	Admin sign-in from outside	Checkbox	Lets an administrator sign in at the portal address followed by /admin.	–	unticked	Turn on two-factor codes first. Unticking ends every such session.

Typical workflow

1. Set the public address (and a home address if you serve one) and press Save.
2. Tick "on" and press Save.
3. Type a name, choose an expiry and what the person may do, press "Create invite".
4. Send the link or let them scan the QR code. It is shown once.
5. Use "New link" or "Revoke" in the table when needed.

Features

- The portal is its own listener on its own port with its own short list of operations; sign-in, settings, scans, renames and logs do not exist there.
- Replies are built from a fixed list of fields, so paths, Plex keys, watch history and notes never leave the server; adult titles are never included.
- The server tests its own addresses on a timer and tells you when one stops working.

Edge cases

- "Create invite" is disabled until an address is set, because the link is built from it.
- Only a fingerprint of each link is stored; a lost link cannot be shown again, only replaced.
- Switching the portal off closes it for everyone at once and keeps the invites.

Messages and what they mean

Message	Meaning and what to do
Set a public or home address first	An invite needs an address to build its link.
<name> already has an active invite; use New link on it	One active invite per name.
port N is already in use	Another program listens on that port. Choose another.
the name does not resolve (DNS)	The address check could not look the name up. A new Tailscale address takes about fifteen minutes to appear.
a different MediaLedger portal answers on this address	The name points at another server.

6.3 Invite created, with its QR code

What appears after "Create invite" or "New link": the link and its QR code, once.

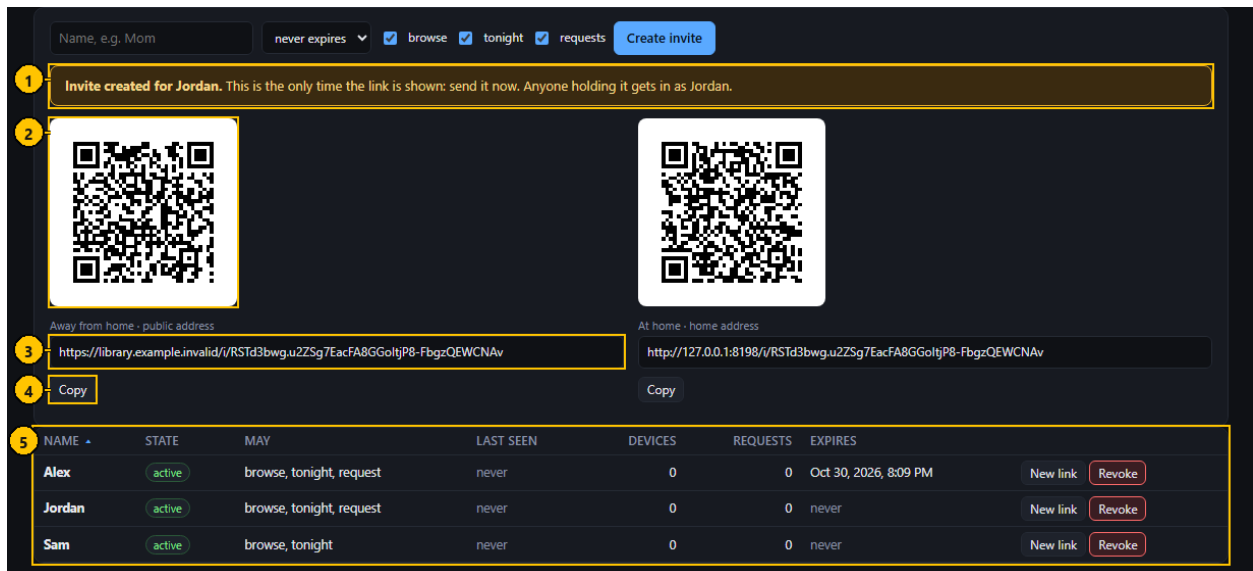


Figure 38. Invite created, with its QR code. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Notice	Notice	Says who the invite is for and that the link is shown only now.	—	—	—
2	QR code	Image	The link as a code for a phone camera.	—	—	—
3	Link	Text field	The link as text. Click to select it.	—	—	Read-only.
4	Copy	Button	Copies the link.	—	—	—
5	Invites	Table	Every invite: state, permissions, last seen, devices, requests, expiry.	—	—	—

Typical workflow

1. Scan the code with the phone that should get access, or copy the link and send it.
2. The phone opens the portal and is remembered for six months.

Features

- "Away from home" uses the public address; "At home" uses the home address.

Edge cases

- Leaving the page discards the link. Use "New link" to get another.

6.4 Log

The tail of the log file: scans, Plex syncs, backups, database upgrades, restores and every failure. It means diagnosing the server does not need a terminal.

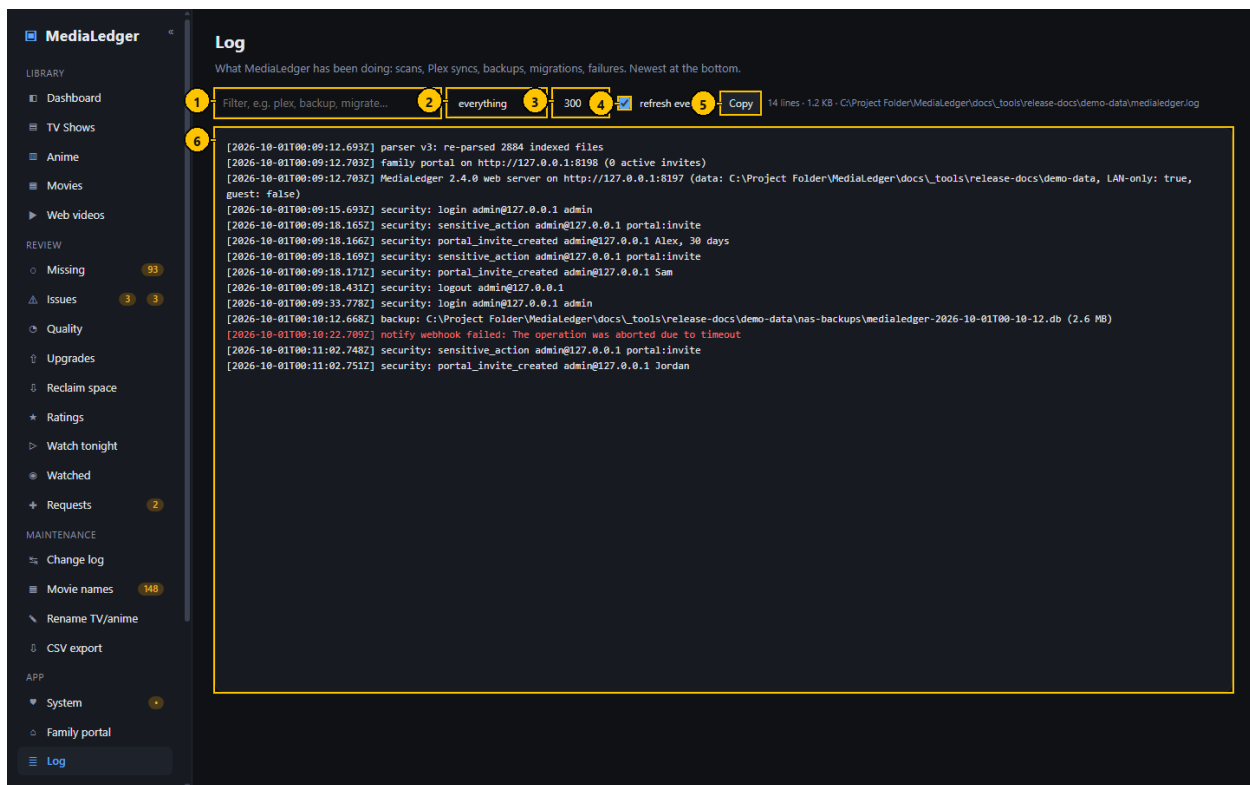


Figure 39. Log. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Filter	Search field	Keeps the lines that contain what you type.	—	empty	—
2	Level	Drop-down list	Everything, or problems only.	—	everything	—
3	Lines	Drop-down list	How many lines to show.	300, 1000, 2000	300	—
4	Refresh every 5 s	Check box	Keeps the view current.	—	on	—
5	Copy	Button	Copies the lines shown.	—	—	—
6	Log lines	Text	The lines, newest at the bottom.	—	—	—

Typical workflow

1. Type a word in the filter, for example plex or backup.
2. Switch to "problems only" to see failures.
3. Press Copy to take the lines elsewhere.

Features

- Refreshes every five seconds while the box is ticked.
- Failures are red, warnings amber.

Edge cases

- Only the last two megabytes of the file are read.
- Administrators only on the web server.

6.5 Security

Accounts, sessions and the protections of the web server. The desktop application shows this page only to explain that it applies to the server.

The screenshot shows the MediaLedger Security settings page. The left sidebar contains navigation links: Library (Dashboard, TV Shows, Anime, Movies, Web videos), Review (Missing, Issues, Quality, Upgrades, Reclaim space, Ratings, Watch tonight, Watched, Requests), Maintenance (Change log, Movie names, Rename TV/anime, CSV export), and App (System, Family portal, Log, Security, Settings, About). The main content area is titled 'Security' and includes a status bar: 'Web server on HTTP port 8197 · 1 active session · 0 failed sign-ins in 24 h · 0 addresses locked out'.

Numbered callouts (1-16) point to the following elements:

- 1: Security status bar
- 2: Current password field
- 3: New password field
- 4: Change password button
- 5: LAN only checkbox
- 6: Idle sign-out minutes input
- 7: Guest access checkbox
- 8: Save options button
- 9: User dropdown menu
- 10: Reset password button
- 11: Username input field
- 12: Add user button
- 13: Set up 2FA button
- 14: Turn on HTTPS button
- 15: Sign out other session button
- 16: Sign out here button

The page also includes sections for Two-factor codes, HTTPS, Sessions, Users, and an Audit log.

Figure 40. Security. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Checklist	Card	Each protection with a tick or a warning.	—	—	—
2	Current password	Password field	Your password now.	—	empty	—
3	New password	Password field	The password to change to.	At least 8 characters	empty	—
4	Change password	Button	Changes your password and signs out your other sessions.	—	—	—
5	LAN only	Check box	Refuses every address outside your network.	—	on	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Sign out when idle	Number field	Minutes without activity after which a session ends.	0 (never) or more	0	–
7	Guest access	Check box	Lets people look without signing in, read-only.	–	off	Guests can also file requests.
8	Save options	Button	Saves the three options above.	–	–	–
9	Role	Drop-down list	The role of that user.	admin, standard	–	–
10	Reset password	Button	Sets a new password for that user.	–	–	–
11	New user	Text field	The name of the account to add.	–	empty	–
12	Add user	Button	Creates the account.	–	–	–
13	Set up 2FA	Button	Starts two-factor setup.	–	–	–
14	Turn on HTTPS	Button	Creates a self-signed certificate and restarts on HTTPS.	–	–	Use "Turn HTTPS off" instead when a reverse proxy holds the certificate.
15	Sign out other sessions	Button	Ends every session but this one.	–	–	–
16	Sign out here	Button	Ends this session.	–	–	–

Typical workflow

1. Read the checklist at the top: each line is a protection and whether it is in place.
2. Change your password, add users, set their roles.
3. Switch on two-factor codes.
4. Decide whether guests may look without signing in.
5. Sign out other sessions if a device was lost.

Features

- Three roles: administrator (everything), standard (read, plus requests and ratings) and guest (read-only, no account).
- LAN only refuses every address outside your network.
- Sensitive actions ask for your password again when your last confirmation is more than five minutes old.
- Every sign-in, refusal and sensitive action is written to a security log, shown at the bottom.

Edge cases

- The last administrator cannot be deleted or demoted.
- Behind a reverse proxy the visitor's real address is read from the proxy, and only when the connection comes from this machine.

Messages and what they mean

Message	Meaning and what to do
Password must be at least 8 characters	Choose a longer password.
Please re-enter your password for this action	The action is sensitive and your last confirmation is too old.
LAN only	The request came from outside your network and was refused.

6.6 Two-factor setup

Adds a six-digit code from an authenticator application to the sign-in, so a leaked password alone is not enough.

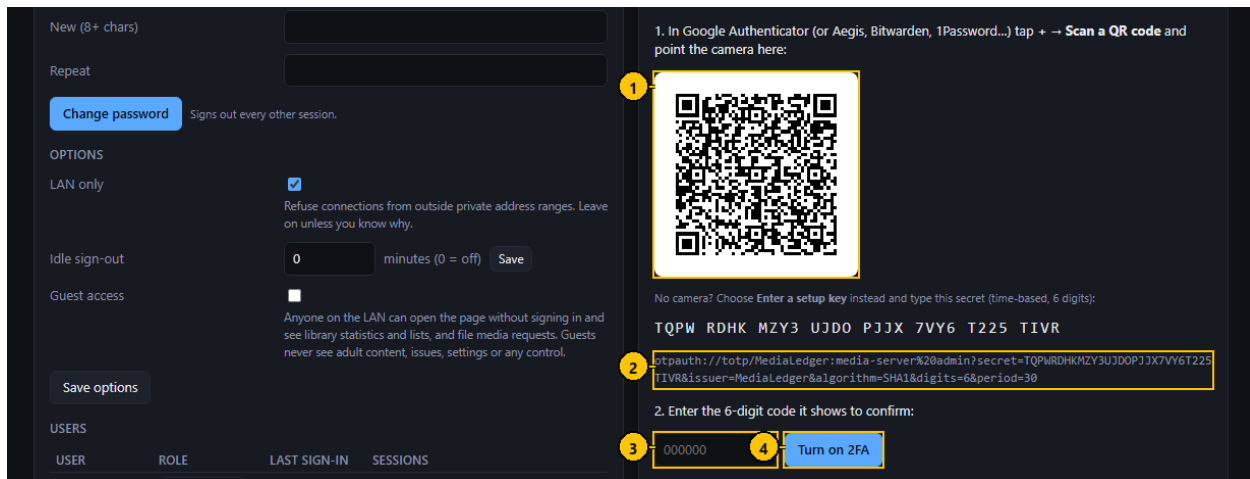


Figure 41. Two-factor setup. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	QR code	Image	The setup key as a code for the authenticator application.	—	—	—
2	Setup key	Text	The same key as text, for typing by hand.	—	—	—
3	Code	Text field	The six digits the application shows.	6 digits	empty	—
4	Turn on 2FA	Button	Confirms the code and switches two-factor codes on.	—	—	—

Typical workflow

1. In the authenticator application choose "Scan a QR code" and point the camera at the code.
2. Or type the key shown under the code.
3. Type the six digits the application shows and press "Turn on 2FA".

Features

- Works with Google Authenticator, Aegis, Bitwarden, 1Password and any application that follows the same standard.

Edge cases

- Setup is not finished until a code has been confirmed.
- Turning two-factor codes off asks for your password.

Messages and what they mean

Message	Meaning and what to do
That code is not right	The six digits did not match. Check the clock of the phone and try the next code.

6.7 About

Which version is running, where its data lives, and how to update.

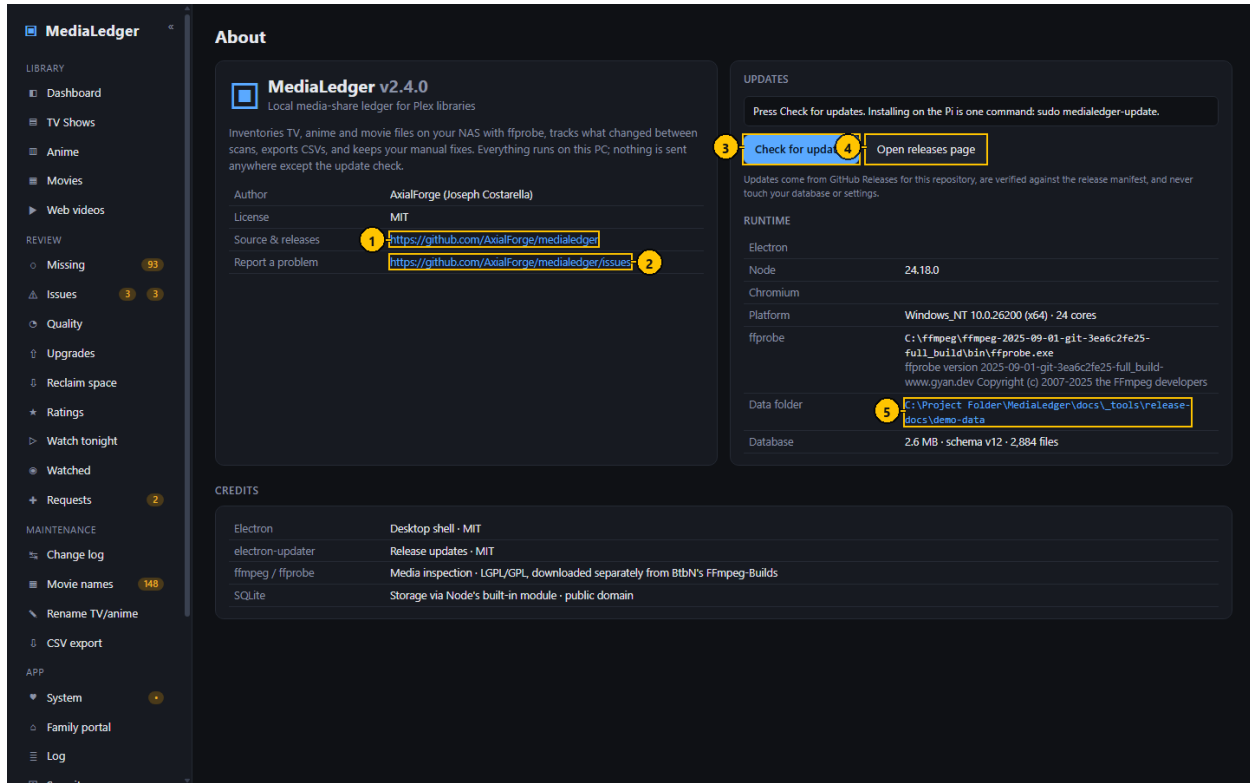


Figure 42. About. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Repository	Link	Opens the project on GitHub.	—	—	—
2	Report a problem	Link	Opens the issue list.	—	—	—
3	Check for updates	Button	Asks GitHub for the newest release.	—	—	—
4	Open releases page	Button	Opens the list of releases.	—	—	—
5	Data folder	Link	The folder that holds the database, the settings and the log.	—	—	Desktop: opens the folder.

Typical workflow

1. Press "Check for updates".
2. On the desktop, a newer version downloads by itself and is applied on the next restart.
3. On the web server the page names the command to run.

Features

- Lists the versions of the parts it is built on and the path of the database.

Edge cases

- The desktop application checks at launch and every six hours when automatic updates are on.

Messages and what they mean

Message	Meaning and what to do
Could not reach GitHub	No connection, or GitHub is limiting requests. Try later.

7. Settings

Everything on the Settings page, section by section. The page has a tab for each group of sections (Library, Episodes and quality, Automation, Connections, Renaming, Backup and data, Appearance), an **All** tab, and a **Find a setting** box; the pictures below each show a few sections with the rest hidden. Nothing on the page takes effect until **Save settings** at the bottom is pressed. The values are stored in `settings.json` in the data folder; section 10 lists every one.

7.1 Settings: Appearance and Library roots

The colour theme, and the folders MediaLedger scans. Nothing is scanned until a root is listed here and enabled.

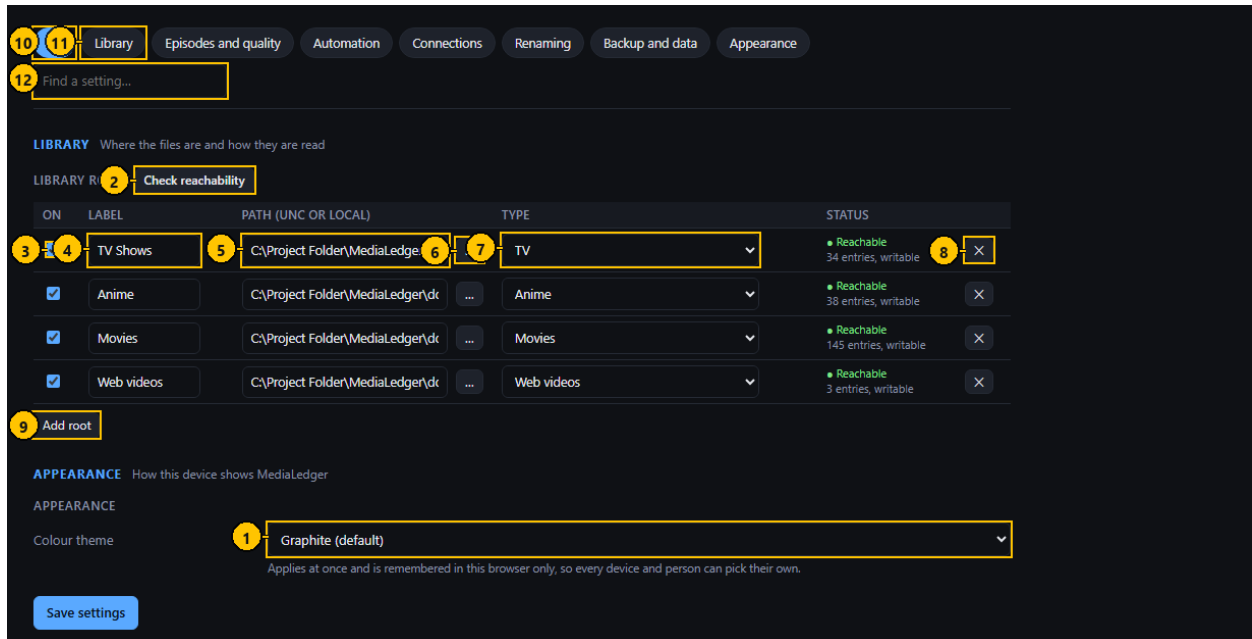


Figure 43. Settings: Appearance and Library roots. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Colour theme	Drop-down list	Changes the colours of the application.	Graphite, Midnight blue, Obsidian, Forest, Rose, Lavender, Gunmetal, Crimson	Graphite	Stored in the browser, per device.
2	Check reachability	Button	Tests every root now and shows the result beside it.	—	—	—
3	On	Check box	Whether this root is scanned.	—	on	—
4	Label	Text field	The name shown for the root.	Free text	—	—
5	Path	Text field	The folder to scan.	A network path or a local folder	—	Windows: \\server\share\folder. Raspberry Pi: /mnt/media/folder.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Browse	Button	Chooses the folder.	–	–	Desktop: the system dialog. Web server: the folder browser.
7	Type	Drop-down list	How the files in this root are read.	TV, Anime, Movies, Web videos, Adult	–	–
8	Remove root	Button	Removes the root from the list.	–	–	–
9	Add root	Button	Adds an empty row.	–	–	–
10	All	Button	Shows every section under its group heading.	–	selected	–
11	Group tabs	Button group	Library, Episodes and quality, Automation, Connections, Renaming, Backup and data, Appearance: shows that group only.	–	–	The tab is remembered in this browser.
12	Find a setting	Search field	Shows only the sections that contain the words typed, across every group.	–	empty	–

Typical workflow

1. Pick a theme; it applies at once.
2. For each library folder add a root: a label, the path, and the type.
3. Press "Check reachability" to confirm every root can be read.
4. Press "Save settings" at the bottom of the page.

Features

- Types: TV, Anime, Movies, Web videos, Adult.
- When a root cannot be reached the page says why: the file server does not answer, the share is not mounted, or the folder is missing.

Edge cases

- On the web server the path is typed or chosen with the folder browser, which lists folders only.
- On the Raspberry Pi an armed automount is nudged before a share is reported as not mounted.
- Removing a root does not delete its records until the next scan marks the files missing.

Messages and what they mean

Message	Meaning and what to do
Share not mounted	The file server answers but the share is not mounted. On the Raspberry Pi: sudo mount, or wait a minute for the watchdog.
does not answer on port 445	The file server is off or unreachable.

7.2 Settings: Network shares (Raspberry Pi server)

On the Raspberry Pi server the media lives on a file server, and the server has to be connected to it before a folder can be picked. This section lists the connected shares and connects new ones. The desktop application has no such section: Windows reaches a share by its path.

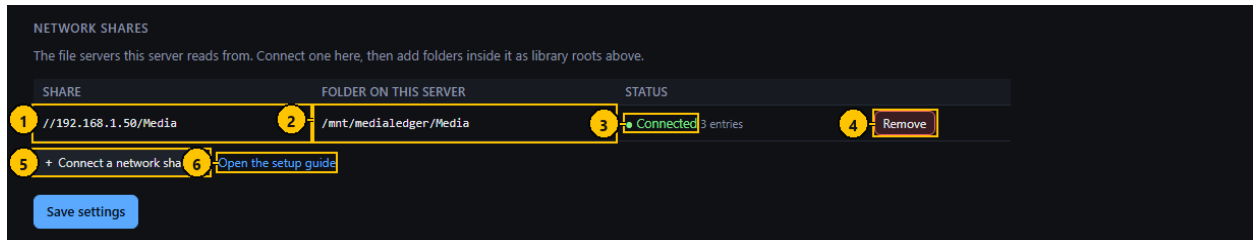


Figure 44. Settings: Network shares (Raspberry Pi server). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Share	Table	The address of the share on the file server.	–	–	–
2	Folder on this server	Table	Where the share appears on the Pi. Pick library folders inside it.	–	/mnt/medialedger/<share>	–
3	Status	Status	Connected with the number of entries, or Not connected.	–	–	Checked each time the page is opened.
4	Remove	Button	Disconnects the share and deletes its stored sign-in.	–	–	Asks first, then asks for your password.
5	Connect a network share	Button	Opens the dialog that signs in to a file server.	–	–	–
6	Open the setup guide	Link	Opens the welcome guide.	–	–	–

Typical workflow

1. Press Connect a network share.
2. Type the address of the file server, a user name and a password, and press Find shares.
3. Tick the shares that hold media and press Connect.
4. Each share appears here as a folder under /mnt/medialedger. Add folders inside it as library roots.

Features

- A share that drops (the file server restarted, the network blinked) is reconnected within a minute by a watchdog on the Pi.
- The sign-in is kept on the Pi in a file only root can read. It is never written to settings.json and never shown again.
- Connecting and removing ask for your password again, like every action that changes what the server can reach.

Edge cases

- A share made by the installer before version 2.4 is listed and marked "installer"; it is changed in /etc/fstab, not here.
- Removing a share changes nothing on the file server. Library roots inside it show as unreachable until it is connected again.
- On a server installed before 2.4 the button is greyed out until the installer has been run once more.

Messages and what they mean

Message	Meaning and what to do
The server refused the username or password	The file server answered but did not accept the sign-in. Check both and that the account may read the share.
... did not answer as a file server. Check the address and that file sharing (SMB) is on	Nothing answered at that address, or it does not share files.
The share helper did not answer	The helper that does the connecting is not running on the Pi. Run the command the message names.
That share was not connected from here	The share was made by the installer; remove it in /etc/fstab.

7.3 Connect a network share dialog

Signs in to a file server, lists the shares it offers, and connects the ones you tick. Reached from Settings, from the folder browser and from the welcome guide.

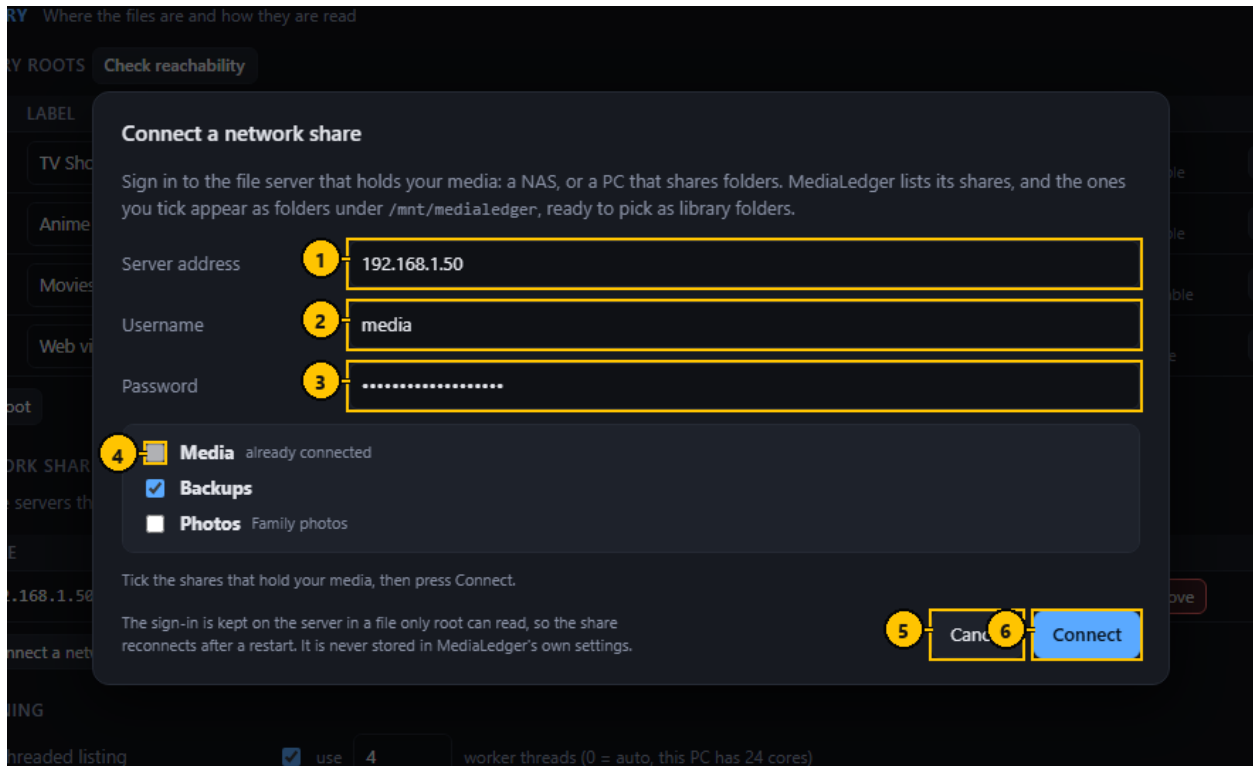


Figure 45. Connect a network share dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Server address	Text field	The file server to sign in to.	An IP address or a name. No slashes.	the server of the first connected share	—
2	Username	Text field	An account on the file server.	No % or = sign.	empty	—
3	Password	Password field	The password of that account.	One line.	empty	Stored on the Pi in a file only root can read.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
4	Share	Checkbox	Tick each share to connect.	–	unticked	Greyed out when already connected.
5	Cancel	Button	Closes the dialog. Shares already connected stay connected.	–	–	–
6	Find shares, then Connect, then Done	Button	First lists the shares, then connects the ticked ones, then closes.	–	Find shares	The label changes with the step.

Typical workflow

1. Type the address of the file server: its IP address, or its name.
2. Type the user name and password of an account on that server that may read the media.
3. Press Find shares. The shares the server offers to that account are listed.
4. Tick the ones that hold media and press Connect.
5. Press Done. The folder browser opens inside the first share connected.

Features

- Shares that are already connected are listed greyed out.
- Hidden administrative shares (names ending in \$) are left out.
- When the tool that lists shares is not installed on the server, a Share name field appears and the share is connected by name.

Edge cases

- The folder a share gets is its name with spaces turned into underscores.
- A share that fails to connect leaves nothing behind: no stored password and no entry that could slow the next start of the Pi.

Messages and what they mean

Message	Meaning and what to do
The server refused the username or password	Wrong sign-in, or the account may not use that share.
The server has no share with that name	Typed by hand and misspelt, or removed on the file server.
The server did not answer. Check the address and that it is switched on	Nothing answered at that address.
The server address must be an IP address or a name, like 192.168.1.204 or nas.home	The address field holds something else, for example a path with slashes.

7.4 Settings: Scanning, ffprobe, lookups and folder watch

How a scan walks the folders and measures the files, where ffprobe is, whether episode counts are looked up online, and whether folders are watched for changes.

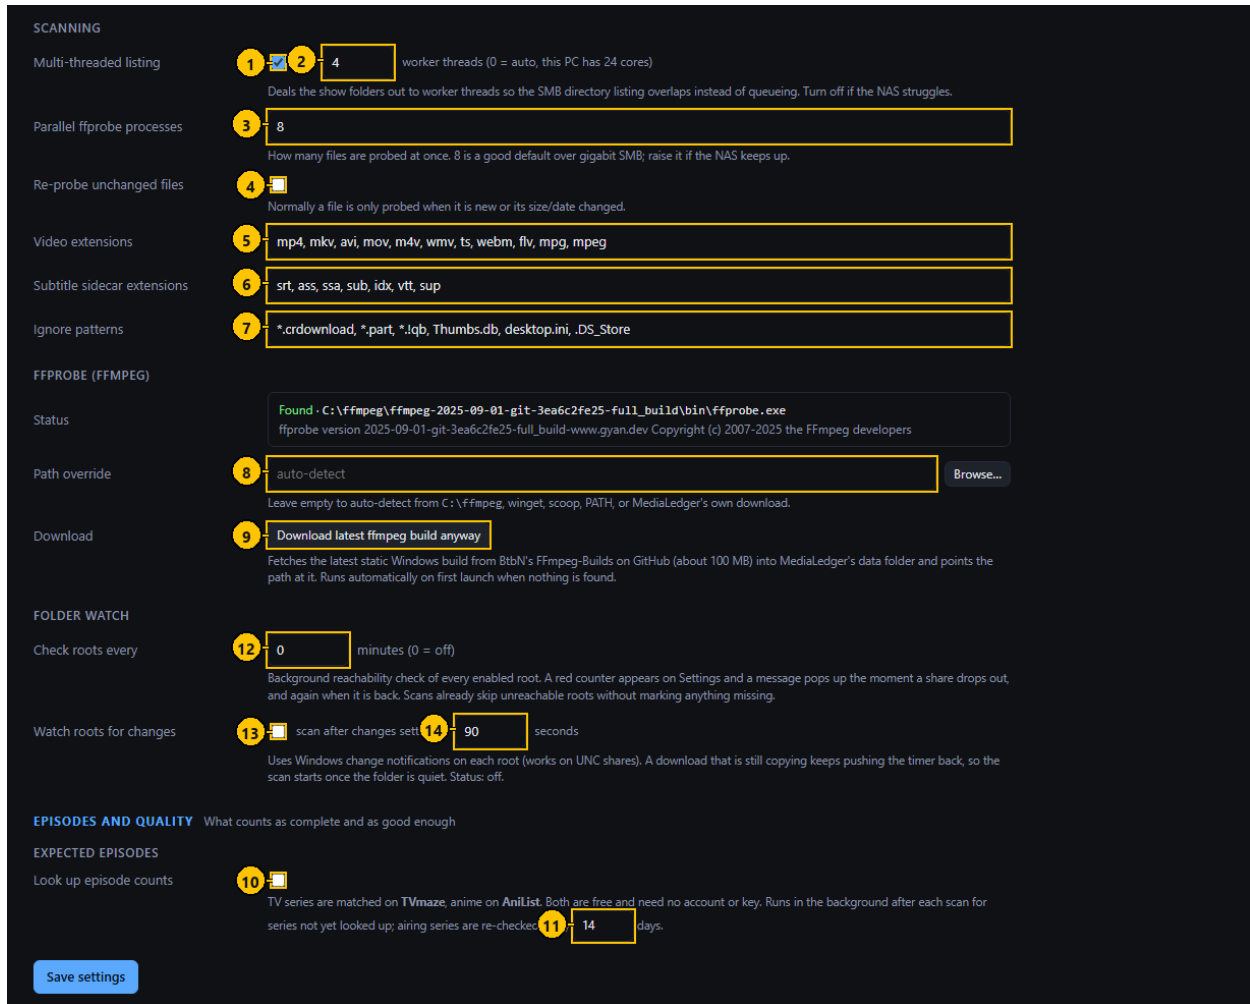


Figure 46. Settings: Scanning, ffprobe, lookups and folder watch. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Multi-threaded scan	Check box	Walks the roots with several threads.	–	on	–
2	Threads	Number field	How many threads walk the folders.	0 to 32; 0 chooses by itself	0	–
3	Parallel probes	Number field	How many ffprobe processes run at once.	1 or more	8	–
4	Probe unchanged files again	Check box	Measures every file again, even when its size and date are unchanged.	–	off	Makes a scan much slower.
5	Video extensions	Text field	Which file types count as video.	Comma separated	mp4, mkv, avi, mov, m4v, wmv, ts, webm, flv, mpg, mpeg	–
6	Subtitle extensions	Text field	Which file types count as subtitles beside a video.	Comma separated	srt, ass, ssa, sub, idx, vtt, sup	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Ignore patterns	Text field	Files to skip.	Comma separated, * as wildcard	*.crdownload, *.part, *.!qb, Thumbs.db, desktop.ini, .DS_Store	–
8	ffprobe path	Text field	Where ffprobe is.	A file path	empty (found automatically)	–
9	Download ffmpeg	Button	Downloads a current ffmpeg build, which includes ffprobe.	–	–	Desktop only.
10	Look up expected episodes	Check box	Asks TVmaze and AniList how many episodes each series has.	–	on	–
11	Check running series again after	Number field	Days before a series that is still airing is looked up again.	1 or more	14	–
12	Check the roots every	Number field	Minutes between reachability checks.	0 (off) or more	5	–
13	Watch the folders	Check box	Starts a scan when files change.	–	off	–
14	Wait for changes to settle	Number field	Seconds of quiet before that scan starts.	–	90	–

Typical workflow

1. Leave the defaults unless scans are slow or something is missed.
2. Press "Save settings".

Features

- A scan walks the roots with several threads, then probes new and changed files with ffprobe.
- Episode lookups use TVmaze and AniList; both are free and need no account.

Edge cases

- Probing is limited by the network share more than by the processor; raising the number of parallel probes beyond 8 rarely helps.
- Folder watch does not work on every network share; the daily scan is the safety net.

Messages and what they mean

Message	Meaning and what to do
ffprobe not found	Press the download button, or point the path at an existing ffprobe.

7.5 Settings: Renaming, adult content, quality thresholds and CSV export

The switches for the rename tools, how adult content is treated, the bitrate below which a file counts as low quality, and where CSV files go.

ADULT CONTENT

Include in CSV exports 2 ☐ Off by default: adult roots are left out of every CSV. In the app they are hidden until the "Show adult content" switch in the sidebar is on; the switch resets each launch.

When unsure, treat as 3 **Anime** Adult roots classify each file as anime, TV or movie from its folder and name. Files that match none of the patterns fall back to this.

EPISODES AND QUALITY What counts as complete and as good enough

QUALITY THRESHOLDS

Minimum bitrate (kbps) 4 **6000** 1440p 3000 1080p 1500 720p 700 576p 400 480p 350 SD 250 Files below these values for their resolution are listed under Quality → Low-bitrate files.

CONNECTIONS Other programs MediaLedger talks to

CSV EXPORT

Output folder 5 C:\Project Folder\MediaLedger\docs\tools\release-docs\demo-data\exports Browse... Open

Export after every scan 6 ☒

RENAMING Changes to file names on the share

RENAMING **WRITES TO THE SHARE**

Enable rename tool 1 ☒ Unlocks the Rename files page, which proposes Plex-standard names and renames only the files you tick, in place, never overwriting, through the same batch engine as the movie tool (pre-flight, verification, journal, undo). Off by default because it is the one feature that modifies the NAS.

[Save settings](#)

Figure 47. Settings: Renaming, adult content, quality thresholds and CSV export. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Renaming	Check box	Enables the Rename TV / anime page.	–	off	Marked "writes to the share".
2	Adult titles in CSV files	Check box	Includes adult titles in exports.	–	off	–
3	Read adult files as	Drop-down list	Whether files in an Adult root are read as anime or as TV.	Anime, TV	Anime	–
4	Minimum bitrate	Number fields	Below this bitrate a file of that resolution counts as low quality.	Kilobits per second, per resolution	4K 6000, 1440p 3000, 1080p 1500, 720p 700, 576p 400, 480p 350, SD 250	Feeds the Quality page and the Upgrades ranking.
5	CSV folder	Text field	Where exports are written.	A folder	empty (the exports folder beside the database)	–
6	Export after each scan	Check box	Writes the CSV files whenever a scan finishes.	–	on	–

Typical workflow

1. Switch renaming on only when you intend to use the rename pages.
2. Adjust the thresholds to your own idea of acceptable quality.
3. Press "Save settings".

Edge cases

- Renaming writes to your share. It is off until you switch it on.

7.6 Settings: Schedules

Every job MediaLedger runs by itself, in one table, with when it last ran and when it runs next.

SCHEDULES

JOB	WHEN	LAST RUN	NEXT
Library scan	manual only	3 days ago done	—
Plex sync	after each scan · every 6 h	3 days ago timer	—
Episode counts and airing dates	off	2 days ago	—
Backup to folder	daily at 03:30 · keep 7	just now C:\Project Folder\MediaLedger\docs\tools\release-docs\demo-data\nas-backups\vned	Oct 1, 2026, 3:30 AM
Daily snapshot (trend cards)	after each scan, else at 03:05	just now	Oct 1, 2026, 3:05 AM
Daily summary notification	daily at 08:00	just now	Oct 1, 2026, 8:00 AM
Posters	after each scan and Plex sync	3 days ago 193 of 213 titles	—
Family portal address check	off	2 min ago library.example.invalid: the name does not resolve (DNS) - 127.0.0.1:8198: worki	—

Everything MediaLedger does on its own, with the last and next run. **Run now** starts a job straight away. Change the timing below and press Save.

Plex sync **6** hours (0 = only after scans)
Pulls ratings, watched state and the play history for every account. A timer keeps the Watched tab current on days without a scan; 6 hours is a sensible value.

Backup **4** 03:30 AM **5** 7 newest
Turn it on and choose the folder under Data.

Daily snapshot **6** 03:05 AM **if no scan has taken one that day**

Daily summary **7** 08:00 AM
Sent by webhook or e-mail as set under Notifications.

In-app scan timer **8** **9** 24 hours
Runs only while MediaLedger is open. Next run: off

Windows Task Scheduler **10** 03:00 AM **11** Install / update task Remove task Run task now
Runs even when the app is closed: launches MediaLedger with --scan, scans, exports and exits. If the app is already open, the open window runs the scan instead.

No scheduled task installed.

Save settings

Figure 48. Settings: Schedules. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Jobs table	Table	Each job, when it runs, the last run and its result, and the next run.	—	—	—
2	Run now	Button	Starts that job.	—	—	—
3	Plex sync every	Number field	Hours between syncs that do not wait for a scan.	0 (only after scans) or more	6	—
4	Backup at	Time field	When the daily backup runs.	Time of day	03:30	—
5	Keep	Number field	How many backup sets to keep.	1 to 60	7	—
6	Daily snapshot at	Time field	When the snapshot is taken if no scan has taken one that day.	Time of day	03:05	—
7	Daily summary at	Time field	When the summary notification goes out.	Time of day	08:00	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
8	In-app scan timer	Check box	Scans on a timer while the application is open.	–	off	–
9	Every	Number field	Hours between those scans.	0.25 or more	24	–
10	Windows scheduled task at	Time field	When the task runs each day.	Time of day	03:00	Desktop only.
11	Install or update task	Button	Creates the scheduled task.	–	–	Desktop only.

Typical workflow

1. Read the table: a red "overdue" badge marks a job that has not run when it should have.
2. Press "Run now" to start a job at once.
3. Change the timing below and press "Save settings".

Features

- Jobs: library scan, Plex sync, episode counts and airing dates, backup, daily snapshot, daily summary, posters, and on the web server the family portal address check.
- A job is overdue when it has not run for twice its interval, 48 hours for the daily ones, or when the last backup failed.

Edge cases

- The in-app scan timer runs only while the application is open; the Windows scheduled task runs even when it is closed.
- On the Raspberry Pi the application is always running, so the in-app timer is the one to use.

7.7 Settings: Data, backups and posters

Where the database is, how it is backed up and restored, and where posters are kept.

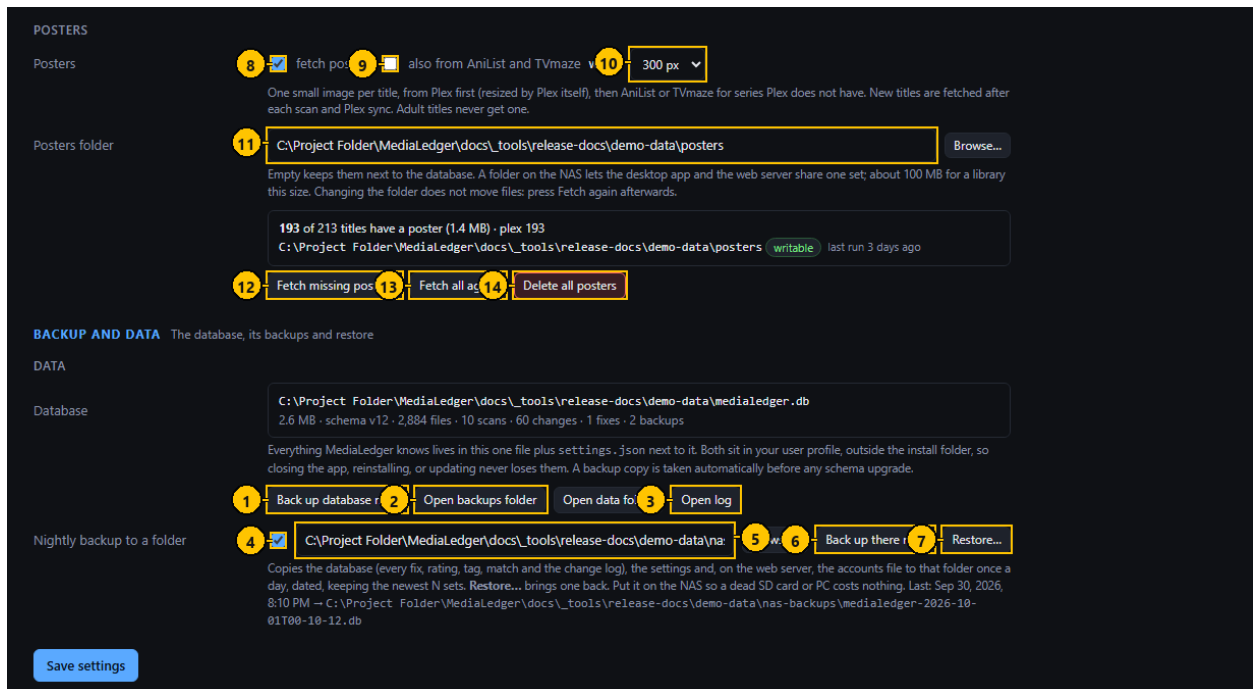


Figure 49. Settings: Data, backups and posters. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Back up database now	Button	Copies the database into the backups folder beside it.	–	–	–
2	Open backups folder	Button	Opens that folder.	–	–	Desktop only.
3	Open log	Button	Opens the log file.	–	–	Desktop only. The Log page works everywhere.
4	Daily backup to a folder	Check box	Copies a backup set to the folder once a day.	–	off	–
5	Backup folder	Text field	Where the sets go.	A folder	empty	–
6	Back up there now	Button	Writes a set at once, which also tests the folder.	–	–	–
7	Restore	Button	Opens the Restore dialog.	–	–	–
8	Fetch posters	Check box	Fetches posters after each scan and Plex sync.	–	on	–
9	Also from AniList and TVmaze	Check box	Uses the online services for series Plex does not have.	–	on	–
10	Width	Drop-down list	The width posters are fetched at.	200, 300 or 400 pixels	300	–
11	Posters folder	Text field	Where posters are kept.	A folder	empty (the posters folder beside the database)	–
12	Fetch missing posters	Button	Fetches posters for titles that have none.	–	–	–
13	Fetch all again	Button	Fetches every poster again.	–	–	Asks first.
14	Delete all posters	Button	Deletes the poster files.	–	–	Asks first. They can be fetched again.

Typical workflow

1. Tick the backup box, set the folder (the NAS is the right place) and press "Back up there now" to test it.
2. Set the posters folder and press "Fetch missing posters".
3. Press "Save settings".

Features

- A backup is a set with one date stamp: the database, the settings and, on the web server, the accounts and portal files.
- A backup is also taken automatically before every database upgrade.
- Posters come from Plex first, then AniList and TVmaze; adult titles never get one.

Edge cases

- The accounts file holds password fingerprints and two-factor keys; keep the backup folder private.
- Changing the posters folder does not move files; fetch again afterwards.
- A title with no art anywhere is asked for again after two weeks.

Messages and what they mean

Message	Meaning and what to do
No backup folder set	Type a folder before backing up.
The posters folder is not writable	The folder does not exist or the application may not write there. On the Raspberry Pi, mount the share for the medialedger user.
Copied backup is empty	The copy failed; the folder may be full or read-only.

7.8 Restore from a backup dialog

Brings the database back from a backup set.

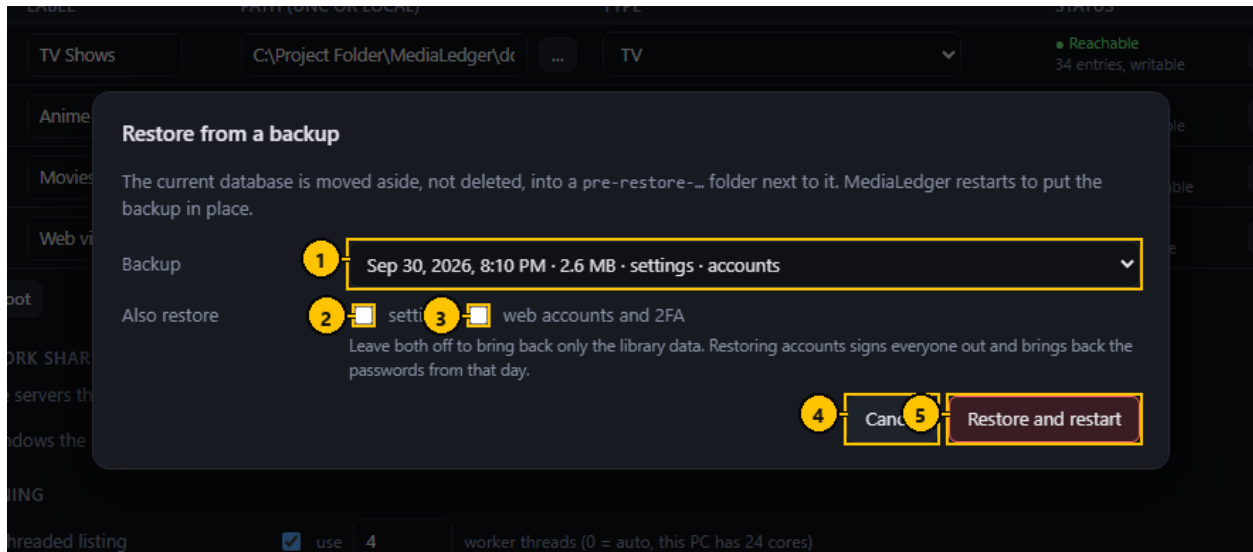


Figure 50. Restore from a backup dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Backup	Drop-down list	The set to restore: its date, size and what it contains.	–	The newest	–
2	Also restore settings	Check box	Brings the settings back too.	–	off	–
3	Also restore web accounts and 2FA	Check box	Brings the accounts, two-factor keys and portal invites back too.	–	off	–
4	Cancel	Button	Closes without restoring.	–	–	–
5	Restore and restart	Button	Checks the backup, restarts, and puts it in place.	–	–	Asks for your password again on the web server.

Typical workflow

1. Pick the set by its date.
2. Tick whether the settings and the accounts should come back as well.
3. Press "Restore and restart" and confirm.

Features

- The backup is opened read-only and checked before anything happens.

- The files it replaces are moved into a folder named pre-restore with the date, beside the database. Nothing is deleted.

Edge cases

- A backup from a newer version is refused; update first.
- Restoring accounts signs everyone out and brings back the passwords of that day.

Messages and what they mean

Message	Meaning and what to do
The backup failed its integrity check	The file is damaged. Choose another set.
The backup is schema vN; this build understands up to vM	The backup is from a newer version.
A scan is running; restore when it has finished	Wait for the scan.

7.9 Folder browser dialog (web server)

Chooses a folder on the server when the application runs in a browser, where the system folder dialog is not available.

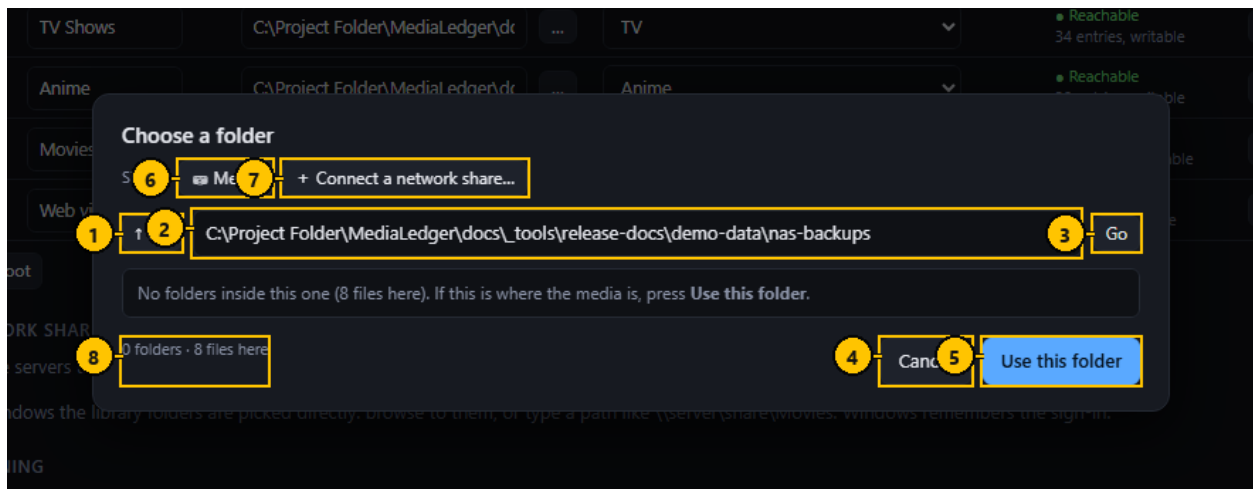


Figure 51. Folder browser dialog (web server). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Up	Button	Goes to the folder above.	–	–	–
2	Path	Text field	The folder being shown.	–	–	Enter does the same as Go.
3	Go	Button	Opens the typed path.	–	–	–
4	Cancel	Button	Closes without choosing.	–	–	–
5	Use this folder	Button	Puts the path into the field you came from.	–	–	–
6	Connected share	Button	Jumps to the folder of that share.	–	–	One button per connected share. Raspberry Pi server only.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Connect a network share	Button	Opens the dialog that signs in to a file server, then returns here inside the new share.	–	–	Raspberry Pi server only.
8	Count	Label	How many folders are listed and how many files this folder holds.	–	–	Up to 2,000 folders are listed.

Typical workflow

1. Type a path and press Go, or click a folder in the list.
2. Press "Use this folder".

Edge cases

- Folders only; files and hidden folders are not listed.

7.10 Settings: Updates and notifications

Whether the desktop application updates itself, and how MediaLedger tells you that something happened.

UPDATES

Automatic updates ☒ 1

Installed builds check GitHub Releases on launch and every 6 hours, download silently and apply on the next restart. Your database and settings are untouched by updates.

GitHub token 2

not needed – the repository is public

Leave empty. Only needed if the AxiolForge/medialedger repository is ever made private again (fine-grained token, Contents: read). Takes effect on the next Check for updates.

NOTIFICATIONS

Webhook URL 3

https://home.example.invalid/api/webhook/medialedger

MediaLedger POSTs a small JSON body (event, title, message, ...) here for every event below. Works with a Home Assistant webhook trigger, ntfy (https://ntfy.sh/your-topic), Discord or anything that accepts a POST.

E-mail 4 5 6 7 8 9

smtp.example.invalid 587 TLS or ledger@example.invalid

password / app pass owner@example.invalid

Any ordinary mailbox. Gmail: host smtp.gmail.com, port 587, your address as user and an app password (Google account → Security → App passwords). The password stays in settings.json on this machine.

Send for 10

☒ new media request ☒ daily summary ☒ backup failed ☒ a scheduled job is overdue

☒ family portal not reachable ☒ episodes airing (in the summ) 11

Send a test

Home Assistant status 12

http://127.0.0.1:8197/api/status?key=TyFRfdEgc6uyMHU_z_T

New key

A read-only JSON summary (files, free space, pending requests, missing episodes, what airs this week, last scan) at a URL with its own key. In Home Assistant add a RESTful sensor with that URL and pick values with value_template, e.g. {{ value_json.pending_requests }}.

Save settings

Figure 52. Settings: Updates and notifications. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Automatic updates	Check box	Checks GitHub at launch and every six hours.	–	on	Desktop only.
2	GitHub token	Password field	Only needed if the repository is made private.	–	empty	Leave empty.
3	Webhook address	Text field	Where event messages are sent.	An https or http address	empty	–
4	E-mail on	Check box	Sends events by e-mail.	–	off	–
5	Mail server	Text field	The outgoing mail server.	–	empty	–
6	Port	Number field	The port of the mail server.	–	587	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Account	Text field	The account to send from.	–	empty	–
8	Password	Password field	The password of that account.	–	empty	–
9	Recipient	Text field	Who receives the e-mail.	–	empty	–
10	Events	Check boxes	Which events are sent: new request, daily summary, backup failed, scheduled job overdue, family portal not reachable, episodes airing.	–	All ticked	–
11	Send a test	Button	Sends a test message through everything that is set up.	–	–	–
12	New key	Button	Replaces the key of the status address.	–	–	The old address stops working.

Typical workflow

1. For a webhook, paste the address and press "Send a test".
2. For e-mail, fill in the server, the account and the recipient, then test.
3. Tick the events you want.
4. Press "Save settings".

Features

- A webhook receives a small JSON message per event; Home Assistant, ntfy and Discord all accept it.
- The status address gives a read-only summary for Home Assistant, protected by its own key.

Edge cases

- For Gmail use an application password, not the account password.
- The update switch applies to the desktop application; the web server is updated with a command.

Messages and what they mean

Message	Meaning and what to do
No webhook or e-mail configured	Set one before testing.

7.11 Settings: Plex

Connects MediaLedger to your Plex Media Server on the local network, to read titles, ratings, watched state and the play history.

PLEX

Plex URL 1 Your Plex Media Server on the LAN, e.g. `http://192.168.1.204:32400` if Plex runs on the NAS.

Plex token 2 3 **Test**
In Plex Web: any item → ... → Get Info → View XML; copy the value after `X-Plex-Token=` in that page's address. Stored only in settings.json on this PC.

Paste the XML address 4 The easy way to get the token. In Plex Web open any movie or episode, click ... → Get Info → View XML. A new tab opens: copy its whole address from the browser's address bar and paste it here. The token (and the server address, when the page came from your LAN) are filled in above; the pasted text itself is not kept. Then press **Test** and **Save settings**.

Sync after every scan 5 ☒ Pulls every movie and show section, links each Plex item to a file by path, and stores Plex's title, year, ids, your Plex rating, audience rating and watched state. Read-only against Plex.

Path mapping 6 → X
7 **Add mapping** How Plex's file paths translate to yours. Derived automatically from the first match; edit if Plex runs elsewhere.
8 **Sync now** Syncs run after each scan when enabled above, and on a timer: every 6 hours. Set the interval under **Schedules** further up this page.

9 **Last sync Sep 28, 2026, 2:06 AM: 2,397 of 2,409 Plex items matched to files · 2,397 of 2,883 files linked · 749 watched · 352 with your Plex rating**
300+ files not in Plex, e.g. `Amber Compass Chronicle\Season 01\Amber Compass Chronicle - S01E01 - Episode 1.mkv · Amber Compass Chronicle\Season 01\Amber Compass Chronicle - S01E02 - Episode 2.mkv · Amber Compass Chronicle\Season 01\Amber Compass Chronicle - S01E03 - Episode 3.mkv`

PLEX LIBRARY	ITEMS	MATCHED	UNMATCHED	WHY
Movies	131	131	0	
TV Shows	2,900	2,900	0	
Anime	2,400	2,388	12	12 × file is not in a scanned root <code>/media/Anime/Example Show/Example Show - S01E01.mkv → C:\Project Folder\MediaLedger\docs_tools\release-docs\demo-data\library\Anime\Example Show\Example Show - S01E01.mkv</code>

Webhook (Plex Pass) 10 ☒ Enabled
Plex calls this server the moment something is added, watched or rated: additions queue a scan two minutes later, watched and rated update the linked file at once. In Plex Web: Settings → Webhooks → Add webhook, paste the URL. LAN-only still applies and the key in the URL is the credential.

11 **Save settings**

Figure 53. Settings: Plex. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Plex address	Text field	The address of the Plex server.	<code>http://address:32400</code>	<code>http://192.168.1.204:32400</code>	–
2	Plex token	Password field	The token that lets MediaLedger read from Plex.	–	empty	Shown as dots; never sent anywhere but your Plex server.
3	Test	Button	Connects and lists the libraries found.	–	–	–
4	Paste the XML address	Text field	Takes the token out of an address copied from Plex.	–	empty	In Plex: an item, the three dots, Get Info, View XML, then copy the address.
5	Sync after each scan	Check box	Runs a sync whenever a scan finishes.	–	off	–
6	Path mapping	Text fields	How a path as Plex reports it translates to the path MediaLedger knows.	–	Worked out on the first sync	–
7	Add mapping	Button	Adds a mapping row.	–	–	–
8	Sync now	Button	Starts a sync.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
9	Last sync	Status	The result of the last sync and the table per library.	–	–	–
10	Webhook enabled	Check box	Accepts reports from Plex.	–	off	Web server only.
11	Save settings	Button	Saves everything on the Settings page.	–	–	Nothing on this page is saved until it is pressed.

Typical workflow

1. Type the address of the Plex server.
2. Paste the XML address from Plex into the box below; the token is taken from it.
3. Press Test.
4. Tick "Sync after each scan" and press "Sync now".
5. Read the table under the last sync for anything unmatched.

Features

- Files are matched by their path; the path mapping translates how Plex sees a file into how MediaLedger sees it, and is worked out by itself on the first sync.
- The table breaks the sync down per Plex library, with the reason for anything unmatched.
- The webhook lets Plex report plays and ratings the moment they happen (Plex Pass).

Edge cases

- "file is not in a scanned root" means Plex has a library MediaLedger does not scan; add the root or ignore the row.
- "no path mapping covers this folder" means that library lives under a path no mapping translates; add a mapping.

Messages and what they mean

Message	Meaning and what to do
Plex rejected the token (401)	The token is wrong or has been revoked. Take a new one.
Could not reach Plex	The address is wrong or the server is off.

8. The family portal

A separate site for the people you invite. It is set up from the Family portal page (section 6) and reached at its own address. These are the pages a visitor sees, shown at the size of a phone, followed by the three pages of the owner's own sign-in at `/admin`.

8.1 Family portal: Library

The family portal is a separate small site for invited people. Library lists what is in the three libraries.

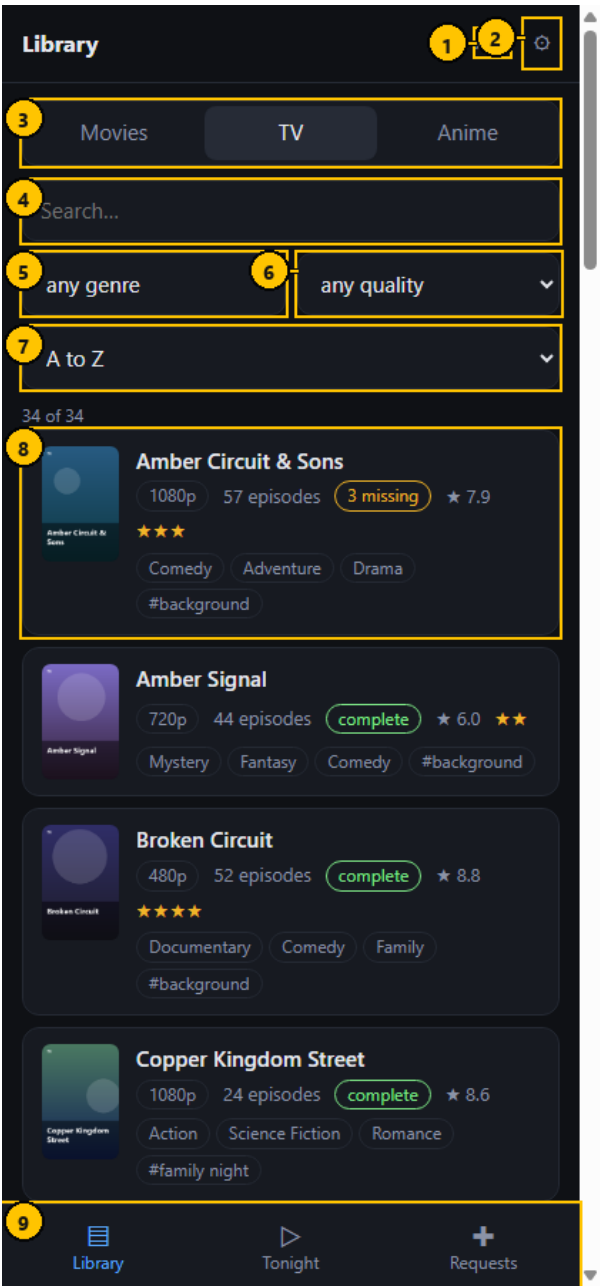


Figure 54. Family portal: Library. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Your name	Label	The name on the invite.	–	–	–
2	Settings	Button	Opens the theme and sign-out page.	–	–	–
3	Library	Tabs	Movies, TV or Anime.	–	Movies	Remembered on this device.
4	Search	Search field	Keeps the titles that contain what you type.	–	empty	Also matches tags.
5	Genre	Drop-down list	Keeps the titles with that genre.	–	any genre	–
6	Quality	Drop-down list	Keeps the titles whose best copy has that resolution.	4K, 1080p, 720p	any quality	–
7	Sort	Drop-down list	Alphabetical, best rated, or newest first.	–	A to Z	–
8	Title	Row	Poster, name, quality, length or episode count, rating, genres.	–	–	Tap to open.
9	Tabs	Navigation	Library, Tonight and Requests, as far as the invite allows.	–	–	–

Typical workflow

1. Tap Movies, TV or Anime.
2. Type in the search box, or choose a genre, a quality or a sort order.
3. Tap a title to open it.

Features

- Posters throughout.
- Series show whether they are complete or how many episodes are missing.

Edge cases

- Adult titles are never listed.
- Without an invite on this device the page only says that an invite is needed.

Messages and what they mean

Message	Meaning and what to do
Invite needed	Open the invite link on this device.
Too many requests; wait a minute	The portal limits how fast one device may ask.

8.2 Family portal: a series

What is on hand of one title.

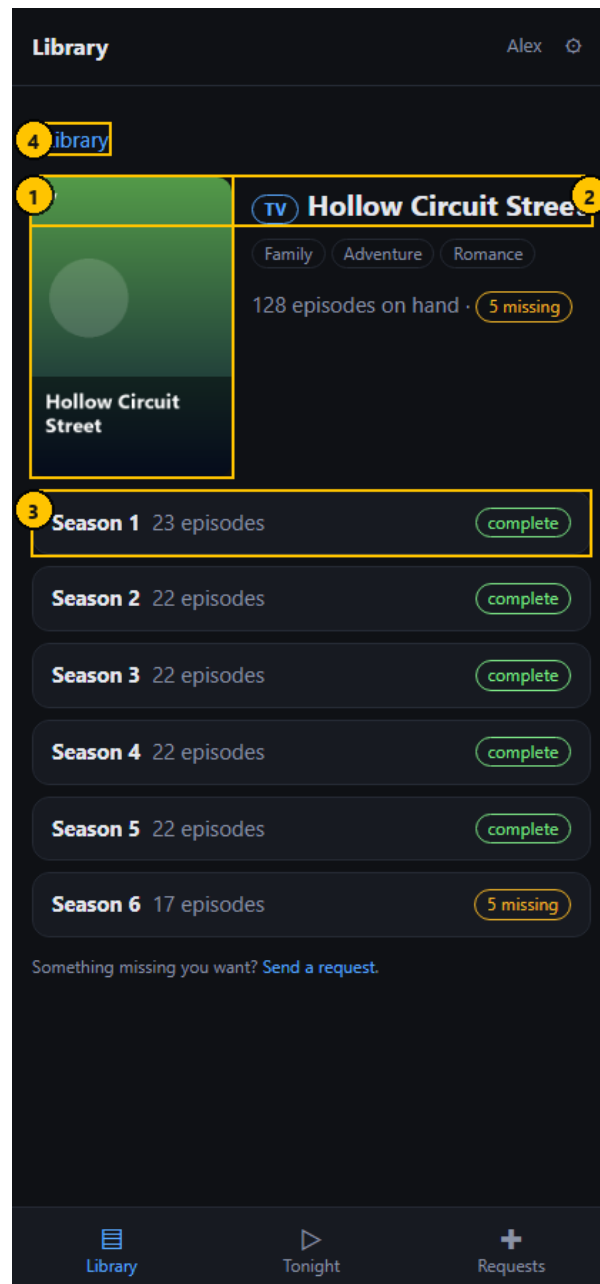


Figure 55. Family portal: a series. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Poster	Image	The poster of the title.	–	–	–
2	Title	Heading	The name and its library.	–	–	–
3	Season	Expandable row	A season with its episode count and whether it is complete.	–	Closed	Tap to open.
4	Back	Link	Returns to the Library.	–	–	–

Typical workflow

1. Tap a season to open it.

- Red lines are episodes that are not in the library.

Features

- A long run of missing episodes is shown as ranges, for example 1 to 60.

Messages and what they mean

Message	Meaning and what to do
Not in the library	The title was removed since the list was loaded.

8.3 Family portal: Tonight

Helps a family member choose something to watch.

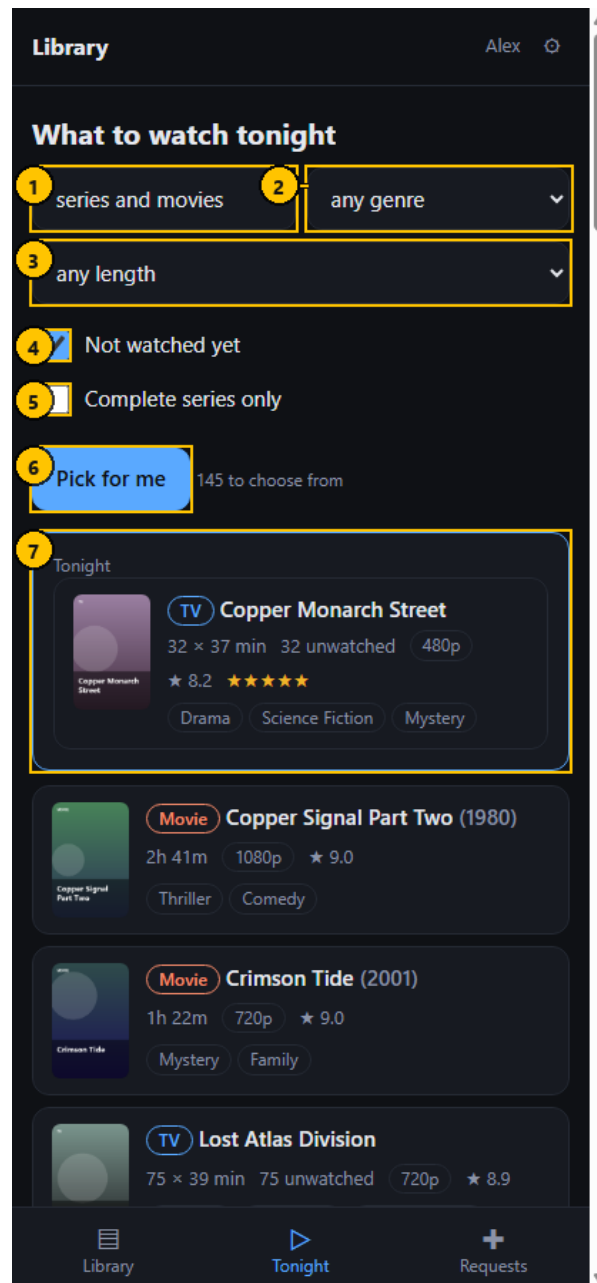


Figure 56. Family portal: Tonight. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Kind	Drop-down list	Series, movies or both.	–	series and movies	–
2	Genre	Drop-down list	Keeps the titles with that genre.	–	any genre	–
3	Length	Drop-down list	The longest length you have time for.	30 minutes to 2 hours 10 minutes	any length	–
4	Not watched yet	Check box	Keeps the titles with something left to watch.	–	on	–
5	Complete series only	Check box	Keeps the series with no missing episodes.	–	off	–
6	Pick for me	Button	Chooses one at random.	–	–	–
7	Tonight	Card	The title that was picked.	–	–	–

Typical workflow

1. Choose the kind, a genre and how long you have.
2. Tap "Pick for me".

Edge cases

- "Not watched yet" follows the Plex account of the household, not the visitor's.

8.4 Family portal: Requests

Lets a family member ask for a title and follow what became of it.

Library Alex

Ask for something

Title
1 Winter Garden Frontier

Kind 2 Anime 3 Year (optional)

Note (optional)
4 Edition, dub or sub, where it streams...

5 **Already in the library:**
 Winter Garden Frontier Anime
 Winter Garden (1979) Movie

6 ☐ Ask anyway (another edition, better quality...)

7 **Send request**

YOUR REQUESTS

8 **Copper Tide Division (2023)** waiting
 TV show 9/24/2026

Paper Lantern Returns (2024) waiting
 Movie 9/16/2026
 The extended cut if there is one

Library Tonight Requests

Figure 57. Family portal: Requests. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Title	Text field	What should be added.	Up to 120 characters	empty	–
2	Kind	Drop-down list	Movie, TV show, Anime or Other.	–	Movie	–
3	Year	Number field	The year of release.	1900 to 2100	empty	Optional.
4	Note	Text area	Edition, dub or sub, where it streams.	Up to 400 characters	empty	Optional.
5	Already in the library	Notice	Lists the matching titles, each a link.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Ask anyway	Button	Sends the request although the title exists.	–	–	–
7	Send request	Button	Sends the request.	–	–	–
8	Your requests	List	Each request with its status and the reply, if any.	–	–	–

Typical workflow

1. Type the title and choose the kind.
2. Tap "Send request".
3. If the title is already in the library the page says so; tap "Ask anyway" for another edition or a better copy.
4. Read "Your requests" for the status and any reply.

Features

- The request arrives in the administrator's Requests page under the name on the invite.

Edge cases

- Six requests an hour and twenty-five a day per invite.
- Only your own requests are listed.

Messages and what they mean

Message	Meaning and what to do
That is a lot of requests; try again in an hour	The hourly or daily limit was reached.
Type the title	The title is missing or too short.
Your invite does not include this	The invite was made without permission to request.

8.5 Family portal: Settings

The visitor's own settings: the colour theme of this device, and forgetting the device.

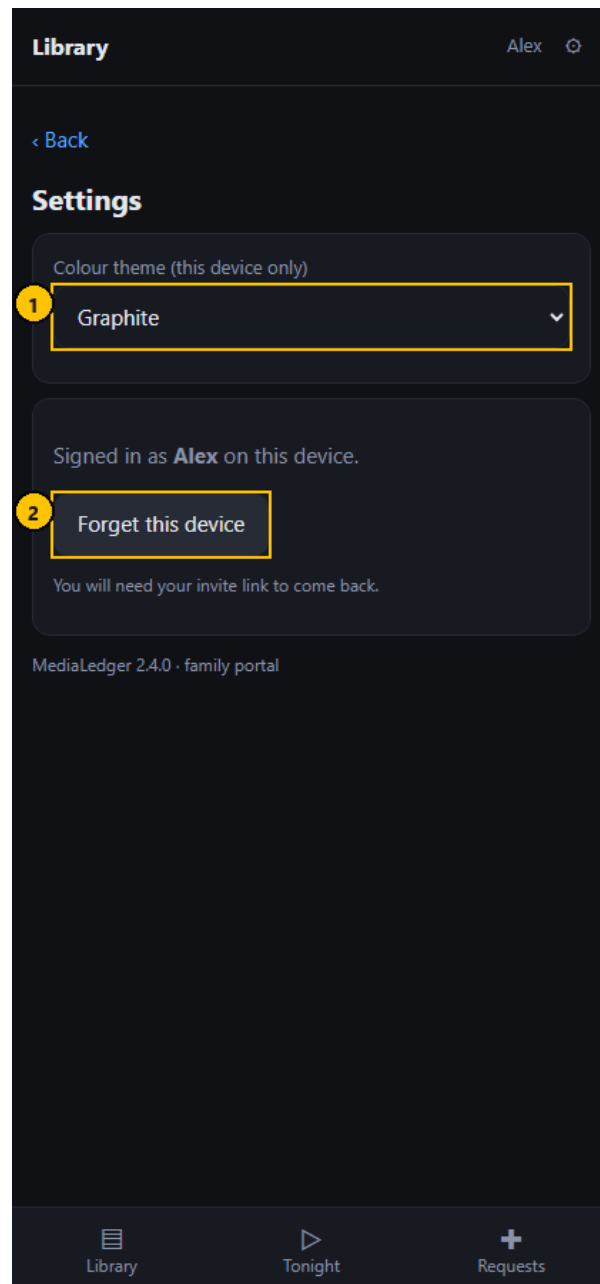


Figure 58. Family portal: Settings. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Colour theme	Drop-down list	Changes the colours on this device.	Eight themes	Graphite	–
2	Forget this device	Button	Signs this device out of the portal.	–	–	Asks first.

Typical workflow

1. Pick a theme.
2. Tap "Forget this device" to sign this device out.

Edge cases

- After forgetting the device, the invite link is needed to come back.

8.6 Portal admin: Requests

The owner's own page on the family portal, at the portal address followed by /admin. It lets an administrator deal with requests from anywhere without being on the home network. It is switched on with "Admin sign-in from outside" on the Family portal page.

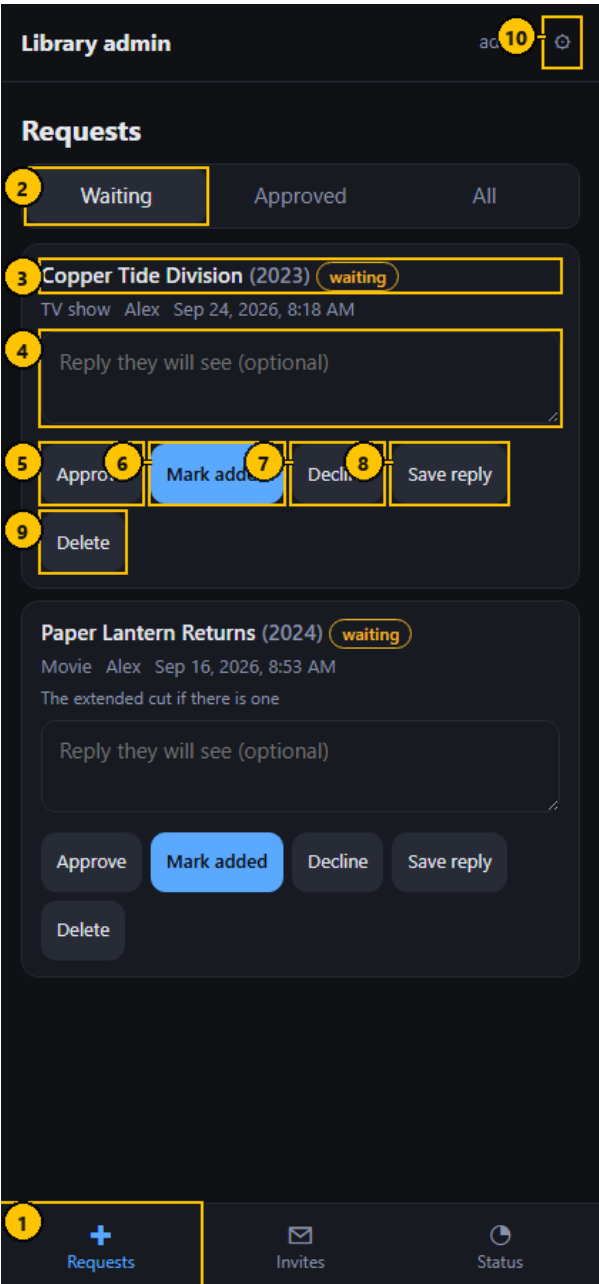


Figure 59. Portal admin: Requests. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Tabs	Navigation	Requests, Invites and Status.	–	Requests	–
2	Waiting, Approved, All	Button group	Which requests are listed.	–	Waiting	–
3	Request	Label	Title, year, kind, who asked and when, with their note.	–	–	–
4	Reply	Text field	A line the requester sees.	Up to 1,000 characters.	empty	Sent with the next button pressed.
5	Approve	Button	Marks the request approved.	–	–	–
6	Mark added	Button	Marks the request as now in the library.	–	–	–
7	Decline	Button	Marks the request declined.	–	–	–
8	Save reply	Button	Saves the reply without changing the status.	–	–	–
9	Delete	Button	Removes the request.	–	–	Asks first.
10	Account	Button	Shows who is signed in and the Sign out button.	–	–	–

Typical workflow

1. Open the portal address followed by /admin and sign in with an administrator account.
2. The Requests tab opens with the requests that are waiting.
3. Type a reply if you want one, then press Approve, Mark added or Decline.

Features

- The same password, lockout and two-factor code as the web application; standard accounts are refused.
- Sessions end after twelve hours, or one hour without use.
- Settings, renames, folders, files and logs do not exist here.

Edge cases

- Switching the option off on the Family portal page ends every session here at once.
- The person who asked sees the status and the reply on their own Requests tab.

Messages and what they mean

Message	Meaning and what to do
Only an admin account can sign in here	The account is a standard one.
Too many attempts; wait fifteen minutes	Twelve sign-in attempts from one address in fifteen minutes.
Not available	Admin sign-in from outside is switched off.

8.7 Portal admin: Invites

Creates and manages family invites from outside the home network.

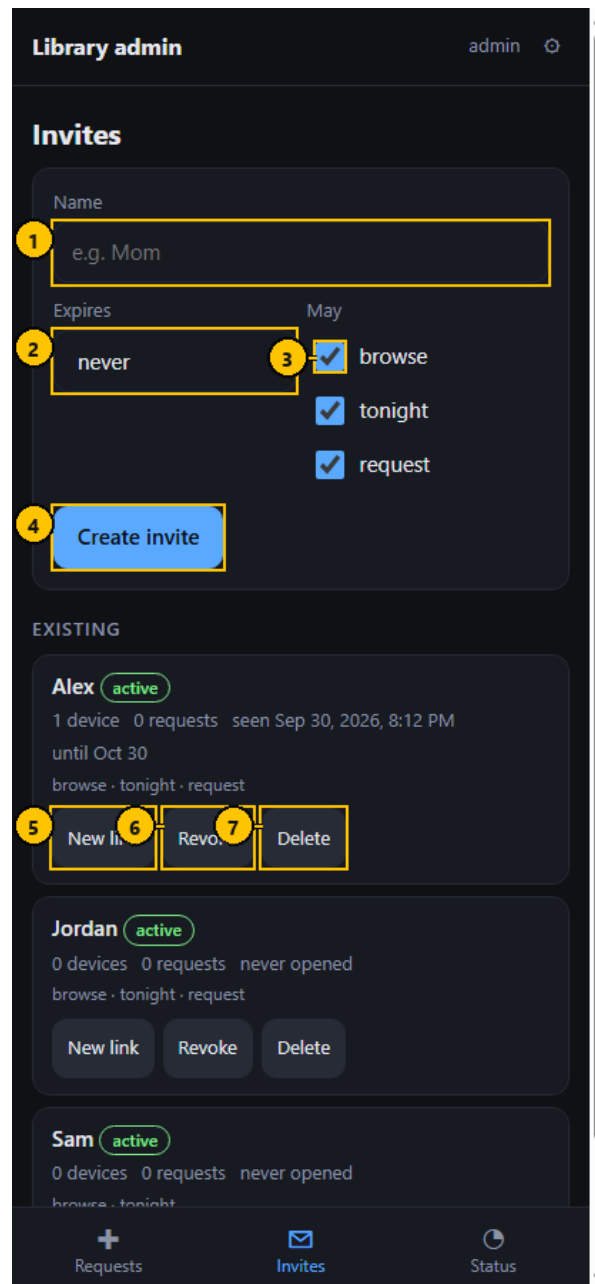


Figure 60. Portal admin: Invites. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Name	Text field	Who the invite is for.	Up to 40 characters.	empty	–
2	Expires	Dropdown	When the invite stops working.	never, 7 days, 30 days, 1 year	never	–
3	May browse, tonight, request	Checkbox	What the invite allows.	–	all ticked	Three checkboxes.
4	Create invite	Button	Makes the invite and shows its link and QR code.	–	–	–
5	New link	Button	Replaces the link of that invite.	–	–	Asks first.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Revoke	Button	Closes the invite.	–	–	Asks first.
7	Delete	Button	Removes the invite.	–	–	Asks first.

Typical workflow

1. Type a name, choose when the invite expires and what it allows.
2. Press Create invite. The link and its QR code are shown once.
3. Send the link, or let the person scan the code.

Features

- New link replaces a lost link; the old link and the devices that used it stop working.
- Revoke closes an invite and keeps it in the list. Delete removes it.

Edge cases

- An address must be set on the Family portal page at home before an invite can be made.
- Two active invites cannot share a name.

Messages and what they mean

Message	Meaning and what to do
... already has an active invite; use New link on it	There is an active invite with that name.
Give the invite a name	The name field is empty.

8.8 Portal admin: Status

How the server is doing, and a way to start its routine jobs, from outside the home network.

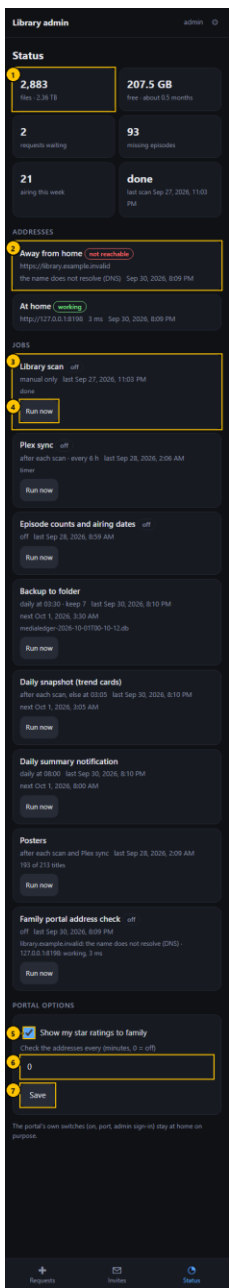


Figure 61. Portal admin: Status. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Tiles	Tile	Files and size, free space, requests waiting, missing episodes, airing this week, last scan.	—	—	—
2	Address check	Status	Whether each portal address answers, how fast, and when it was checked.	—	—	—
3	Job	Status	A scheduled job: when it runs, when it last ran and what it said.	—	—	Overdue jobs are outlined.
4	Run now	Button	Starts that job.	—	—	—

#	Control name	Type	What it does	Inputs and limits	Default	Notes
5	Show my star ratings to family	Checkbox	Whether visitors see your ratings.	–	ticked	–
6	Check the addresses every	Number field	Minutes between address checks.	0 (off) to 1440	15	–
7	Save	Button	Saves the two options.	–	–	–

Typical workflow

1. Read the tiles and the address checks.
2. Press Run now beside a job to start it.
3. Change the two portal options and press Save.

Features

- Jobs: scan, Plex sync, metadata, posters, backup, snapshot, daily summary and the address check.
- File paths never appear here: a note that names a file shows the file name only.

Edge cases

- The portal's own switches (on, port, addresses, admin sign-in) can only be changed at home.

Messages and what they mean

Message	Meaning and what to do
That job cannot be started from outside	Only the listed routine jobs may be started here.

9. Short dialogs

These dialogs have one or two buttons and appear in the middle of a task. They have no screenshot of their own.

9.1 Confirm it is you (password again)

Web server only. Before an action that changes files or security settings, the server asks for your password again unless you confirmed within the last five minutes.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Password	Password field	Your password.	–	empty	–
–	Confirm	Button	Confirms and carries on with the action.	–	–	–

9.2 One at a time

Walks through the ticked files, showing the current and the proposed name of each and asking before every rename. Used by both rename pages.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Rename this file	Button	Renames the file shown and moves to the next.	–	–	–
–	Skip	Button	Leaves this file as it is and moves to the next.	–	–	–
–	Stop	Button	Ends the walk; files already renamed stay renamed.	–	–	–

9.3 Dry run result

Lists what a rename would do to each ticked file, with a tick or a cross and the reason for a cross. Nothing on the share changes.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Close	Button	Closes the result.	–	–	–

9.4 Batch items

Lists the files of one batch with the status of each: done, failed, aborted or undone.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Close	Button	Closes the list.	–	–	–

9.5 Undo batch

Confirms renaming the files of a batch back. Each file is checked first: still present, same size, original name free.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Cancel	Button	Closes without undoing.	–	–	–
–	Undo now	Button	Renames the files back.	–	–	–

9.6 Rename movie files, live

The confirmation before a live movie batch. It lists the files (the first sixty) and asks you to type RENAME, so a live run cannot be started by a stray click.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Type RENAME to confirm	Text field	Type the word RENAME.	Exactly RENAME	empty	The rename button stays disabled until it matches.
–	Cancel	Button	Closes without renaming.	–	–	–
–	Rename now	Button	Runs the live batch.	–	disabled	Enabled once RENAME is typed.

9.7 Movie batch result

Shows the outcome of a movie batch, dry or live: how many files were renamed, skipped and failed.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Close	Button	Closes the result.	–	–	–

9.8 Set source for selected

Confirms recording where the ticked copies came from, which the Source part of the name uses.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Cancel	Button	Closes without changing.	–	–	–
–	Apply	Button	Saves the source as a fix on each ticked file.	–	–	–

9.9 Ignore the other files

When several files would get the same name, keeps one and marks the others as ignored. The ignored files stay on disk.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Cancel	Button	Closes without changing.	–	–	–
–	Ignore them	Button	Marks the other files as ignored.	–	–	–

9.10 Card settings (before version 2.0)

The colour-rule dialog of versions 1.9 to 1.12, opened by a gear on a tile. Version 2.0 replaced it with the card options dialog; the code remains but no gear opens it.


This dialog is not reachable from the interface in version 2.4.0.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Editor level	Drop-down list	Simple, Standard or Advanced.	–	Standard	–
–	Colour rule	Group	Amber and red thresholds.	–	–	Advanced only.

10. Common tasks from start to finish

10.1 Find and fill the gaps in a series

1. Open **Missing** and sort by Missing.
2. If the series is listed against the wrong title, press **Match**, search, and pick the right one.
3. If you joined the series late, press **Collect** and choose the first episode you want.
4. Open the series page to see exactly which episodes are red.
5. Add the files to the share, then press **Scan now**. The gaps close by themselves.

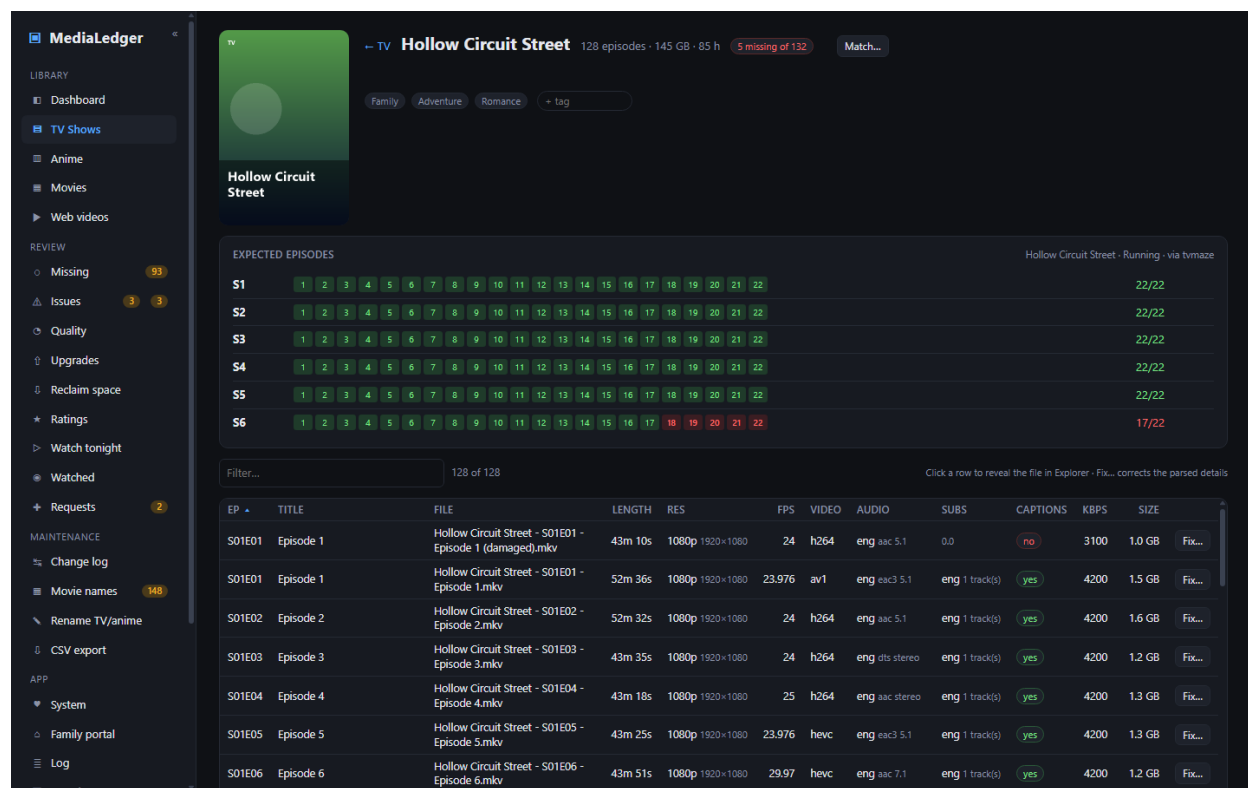

The screenshot shows the MediaLedger interface for the series 'Hollow Circuit Street'. The left sidebar contains navigation options like Library, Review, Maintenance, and App. The main area shows the series page with a 'TV' icon and a 'Match...' button. Below the series title, there's a section for 'EXPECTED EPISODES' with a progress bar for each episode (S1 to S6). The progress bars show that episodes S1 to S6 are all on hand (green) except for S1, which is marked as missing (red). Below this is a table of episode details.

EP	TITLE	FILE	LENGTH	RES	FPS	VIDEO	AUDIO	SUBS	CAPTIONS	KBPS	SIZE		
S01E01	Episode 1	Hollow Circuit Street - S01E01 - Episode 1 (damaged).mkv	43m 10s	1080p	1920x1080	24	h264	eng aac 5.1	0.0	no	3100	1.0 GB	Fix...
S01E01	Episode 1	Hollow Circuit Street - S01E01 - Episode 1.mkv	52m 36s	1080p	1920x1080	23.976	av1	eng eac3 5.1	eng 1 track(s)	yes	4200	1.5 GB	Fix...
S01E02	Episode 2	Hollow Circuit Street - S01E02 - Episode 2.mkv	52m 32s	1080p	1920x1080	24	h264	eng aac 5.1	eng 1 track(s)	yes	4200	1.6 GB	Fix...
S01E03	Episode 3	Hollow Circuit Street - S01E03 - Episode 3.mkv	43m 35s	1080p	1920x1080	24	h264	eng dts stereo	eng 1 track(s)	yes	4200	1.2 GB	Fix...
S01E04	Episode 4	Hollow Circuit Street - S01E04 - Episode 4.mkv	43m 18s	1080p	1920x1080	25	h264	eng aac stereo	eng 1 track(s)	yes	4200	1.3 GB	Fix...
S01E05	Episode 5	Hollow Circuit Street - S01E05 - Episode 5.mkv	43m 25s	1080p	1920x1080	23.976	hevc	eng eac3 5.1	eng 1 track(s)	yes	4200	1.3 GB	Fix...
S01E06	Episode 6	Hollow Circuit Street - S01E06 - Episode 6.mkv	43m 51s	1080p	1920x1080	29.97	hevc	eng aac 7.1	eng 1 track(s)	yes	4200	1.2 GB	Fix...

Figure 62. A series page: green is on hand, red is missing.

10.2 Tidy the names of a group of episodes

1. Open **Settings, Renaming**, switch renaming on, and save.
2. Open **Rename TV/anime**. Choose the name parts with the chips.
3. Set the number beside **Select next** to a small group, for example 5, and press it.
4. Press **Dry run** and read the result.
5. Press **Rename**, read the list in the confirmation, and press **Rename now**.
6. Press **Select next** again for the following group.
7. If something went wrong, press **Undo** on the batch in the Batches table.

Rename files

This page **renames files on your share**. Proposals come from the parsed details plus your manual fixes, so fix anything wrong under **Issues** first. Files are renamed in place (same folder), never overwritten. Every run is a batch: pre-flighted as a whole, each rename verified, journaled below, and undoable.

Name parts: **Show - S01E02** **Episode title** Resolution Codec Sub/Dub Click a part to leave it out or put it back. Preview: Show - S01E02 - Pilot.mkv

Proposed renames: **4** From manual fixes: **0** Renamed so far: **8** -8 failed

Filter... all libraries Only files with manual fixes 4 of 4 Select next 5 Select shown Clear Dry run 4 **Rename 4 files**

One at a time

LIBRARY	FOLDER	CURRENT NAME	PROPOSED NAME	Fix...	Rename
☒ Anime	Distant Station Frontier	special preview.mkv	→ Distant Station Frontier - S00E01.mkv	Fix...	Rename
☒ TV	Distant Foundry & Sons\Season 01	Distant Foundry & Sons - S01E02 - Episode 2 (copy).mkv	→ Distant Foundry & Sons - S01E02 - Episode 2.mkv	Fix...	Rename
☒ TV	Distant Foundry & Sons\Season 01	Distant Foundry & Sons - S01E03 - Episode 3 720p.mp4	→ Distant Foundry & Sons - S01E03.mp4	Fix...	Rename
☒ TV	Hollow Circuit Street\Season 01	Hollow Circuit Street - S01E01 - Episode 1 (damaged).mkv	→ Hollow Circuit Street - S01E01 - Episode 1.mkv	Fix...	Rename

BATCHES

#	WHEN	MODE	STATUS	PLANNED	DONE	FAILED	UNDONE	Items	Undo
3	Sep 25, 2026, 8:05 AM	live	done	8	8	0	0	0	Undo

Older history (before batches)

4 selected; the rest stay untouched

Figure 63. Five files ticked with *Select next*.

10.3 Arrange the Dashboard

1. Press **Edit dashboard**.
2. Remove the cards you never read with the cross on their handle.
3. Press **Add card** and add the ones you want.
4. Drag cards into order and set their width with S, M, L and XL.
5. Press the gear on a number tile to set when it turns amber and red (choose **Advanced** under "Options shown" first).
6. Press **Done**.

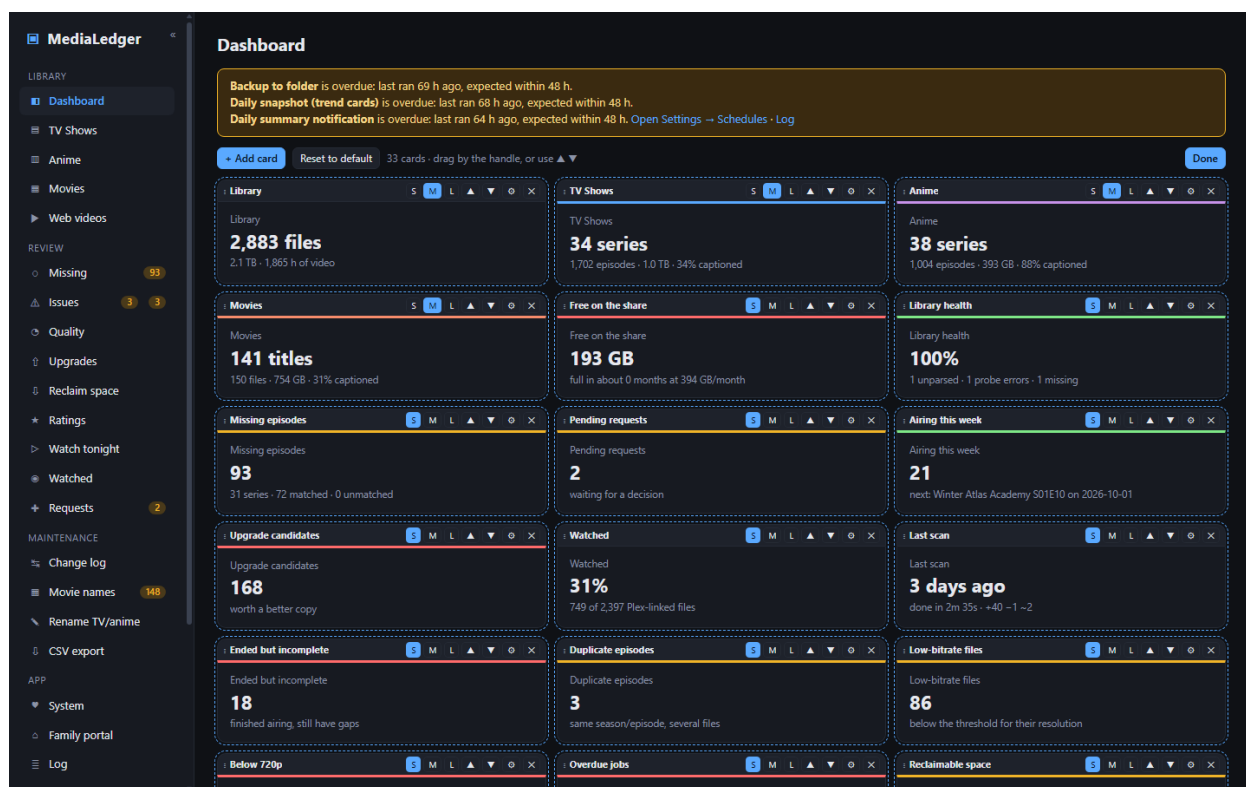


Figure 64. The Dashboard in edit mode.

10.4 Give a family member access

1. Open **Family portal**. Set the public address and press **Save**.
2. Tick **on** and press **Save**.
3. Type the name, choose an expiry, press **Create invite**.
4. Have them scan the QR code with their phone, or send them the link.
5. Their requests appear under **Requests**, marked with their name.
6. To end their access, press **Revoke** on their row.

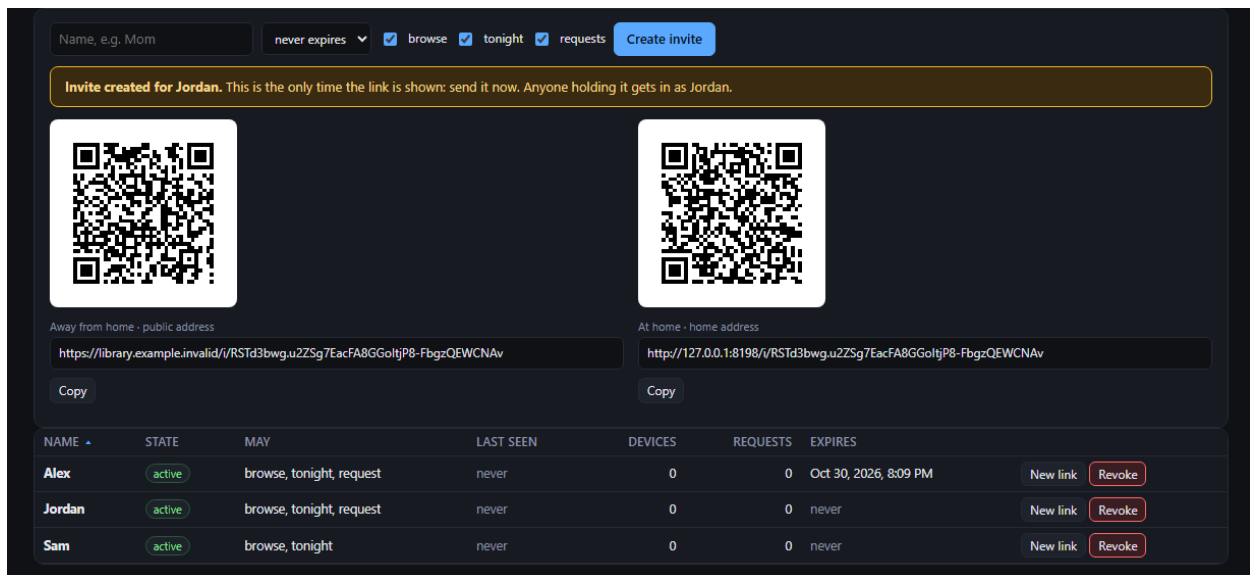


Figure 65. The invite with its QR code, shown once.

10.5 Back up, and restore

1. Open **Settings, Data**. Tick the daily backup, type the folder, press **Back up there now**.
2. Save the settings. A set is written every day at the time under **Schedules**.
3. To restore: press **Restore**, pick the set by date, choose whether settings and accounts should come back too.
4. Press **Restore and restart**. The application restarts on the restored data; the replaced files are kept in a pre-restore folder.

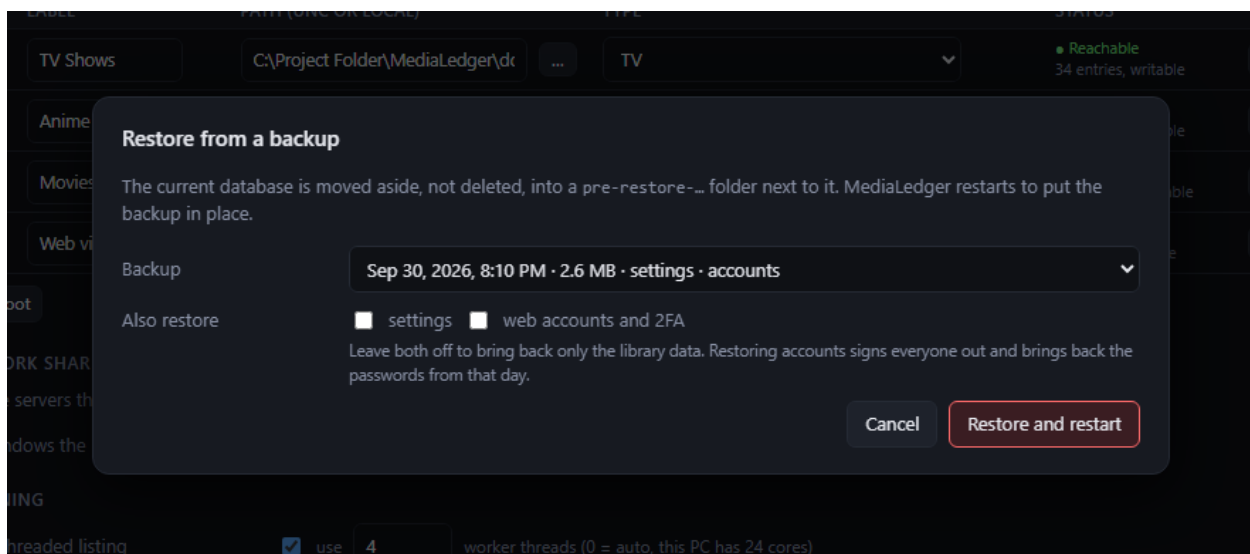


Figure 66. The Restore dialog.

10.6 Find out why something did not happen

1. Open **Settings, Schedules** and look for a red "overdue" badge and the result of the last run.
2. Open **Log**, type a word such as plex or backup, and switch to **problems only**.
3. Press **Run now** on the job and watch the log.

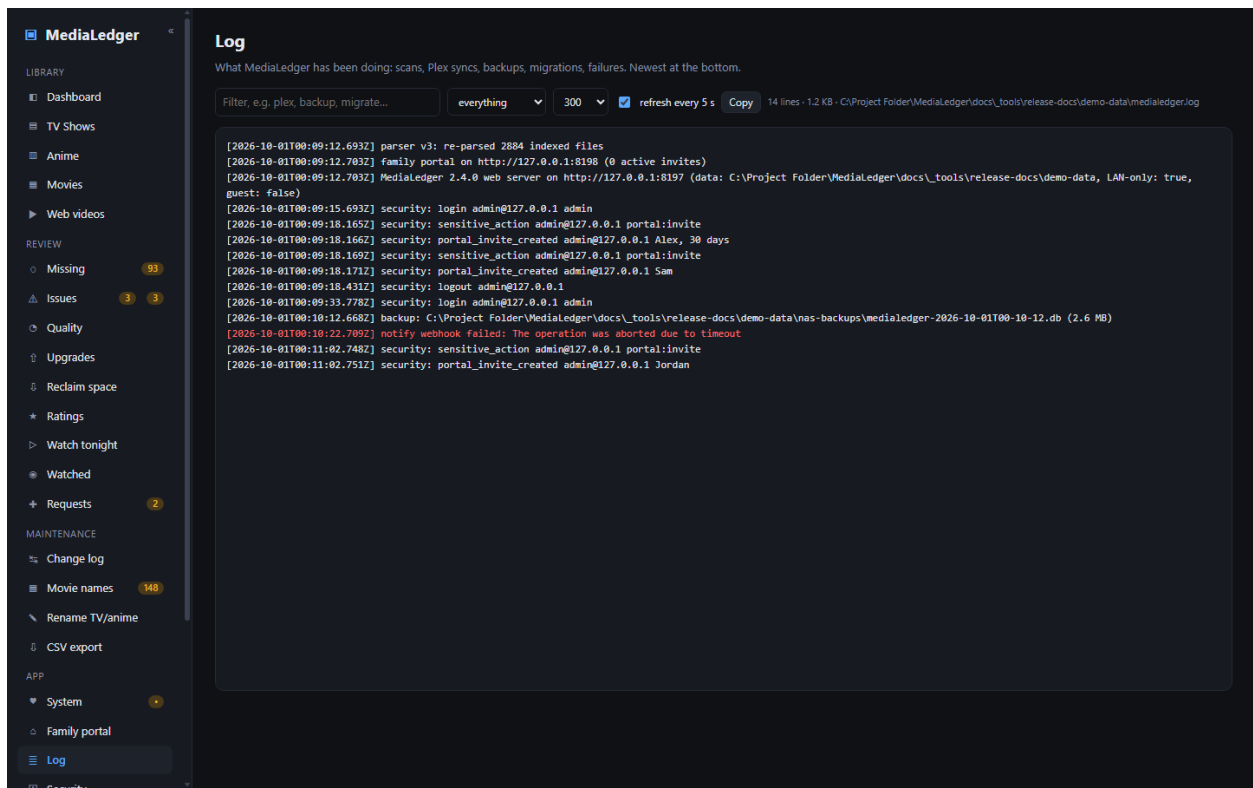


Figure 67. The Log page.

11. Settings reference

Every option on the Settings page and the pages that keep their own settings. "Stored in" says which file holds the value; all of them are in the data folder (%APPDATA%\MediaLedger on the desktop, /var/lib/medialedger on the Raspberry Pi) unless the browser is named.

Section	Option	What it does	Default	Stored in
Appearance and Library roots	Colour theme	Changes the colours of the application.	Graphite	The browser (local storage)
Appearance and Library roots	On	Whether this root is scanned.	on	settings.json
Appearance and Library roots	Label	The name shown for the root.	–	settings.json
Appearance and Library roots	Path	The folder to scan.	–	settings.json
Appearance and Library roots	Type	How the files in this root are read.	–	settings.json
Appearance and Library roots	Find a setting	Shows only the sections that contain the words typed, across every group.	empty	settings.json
Scanning, ffprobe, lookups and folder watch	Multi-threaded scan	Walks the roots with several threads.	on	settings.json
Scanning, ffprobe, lookups and folder watch	Threads	How many threads walk the folders.	0	settings.json
Scanning, ffprobe, lookups and folder watch	Parallel probes	How many ffprobe processes run at once.	8	settings.json
Scanning, ffprobe, lookups and folder watch	Probe unchanged files again	Measures every file again, even when its size and date are unchanged.	off	settings.json
Scanning, ffprobe, lookups and folder watch	Video extensions	Which file types count as video.	mp4, mkv, avi, mov, m4v, wmv, ts, webm, flv, mpg, mpeg	settings.json
Scanning, ffprobe, lookups and folder watch	Subtitle extensions	Which file types count as subtitles beside a video.	srt, ass, ssa, sub, idx, vtt, sup	settings.json
Scanning, ffprobe, lookups and folder watch	Ignore patterns	Files to skip.	*.crdownload, *.part, *.lqb, Thumbs.db, desktop.ini, .DS_Store	settings.json
Scanning, ffprobe, lookups and folder watch	ffprobe path	Where ffprobe is.	empty (found automatically)	settings.json
Scanning, ffprobe, lookups and folder watch	Look up expected episodes	Asks TVmaze and AniList how many episodes each series has.	on	settings.json
Scanning, ffprobe, lookups and folder watch	Check running series again after	Days before a series that is still airing is looked up again.	14	settings.json
Scanning, ffprobe, lookups and folder watch	Check the roots every	Minutes between reachability checks.	5	settings.json
Scanning, ffprobe, lookups and folder watch	Watch the folders	Starts a scan when files change.	off	settings.json
Scanning, ffprobe, lookups and folder watch	Wait for changes to settle	Seconds of quiet before that scan starts.	90	settings.json
Renaming, adult content, quality thresholds and CSV export	Renaming	Enables the Rename TV / anime page.	off	settings.json

Section	Option	What it does	Default	Stored in
Renaming, adult content, quality thresholds and CSV export	Adult titles in CSV files	Includes adult titles in exports.	off	settings.json
Renaming, adult content, quality thresholds and CSV export	Read adult files as	Whether files in an Adult root are read as anime or as TV.	Anime	settings.json
Renaming, adult content, quality thresholds and CSV export	Minimum bitrate	Below this bitrate a file of that resolution counts as low quality.	4K 6000, 1440p 3000, 1080p 1500, 720p 700, 576p 400, 480p 350, SD 250	settings.json
Renaming, adult content, quality thresholds and CSV export	CSV folder	Where exports are written.	empty (the exports folder beside the database)	settings.json
Renaming, adult content, quality thresholds and CSV export	Export after each scan	Writes the CSV files whenever a scan finishes.	on	settings.json
Schedules	Plex sync every	Hours between syncs that do not wait for a scan.	6	settings.json
Schedules	Backup at	When the daily backup runs.	03:30	settings.json
Schedules	Keep	How many backup sets to keep.	7	settings.json
Schedules	Daily snapshot at	When the snapshot is taken if no scan has taken one that day.	03:05	settings.json
Schedules	Daily summary at	When the summary notification goes out.	08:00	settings.json
Schedules	In-app scan timer	Scans on a timer while the application is open.	off	settings.json
Schedules	Every	Hours between those scans.	24	settings.json
Schedules	Windows scheduled task at	When the task runs each day.	03:00	settings.json
Data, backups and posters	Daily backup to a folder	Copies a backup set to the folder once a day.	off	settings.json
Data, backups and posters	Backup folder	Where the sets go.	empty	settings.json
Data, backups and posters	Fetch posters	Fetches posters after each scan and Plex sync.	on	settings.json
Data, backups and posters	Also from AniList and TVmaze	Uses the online services for series Plex does not have.	on	settings.json
Data, backups and posters	Width	The width posters are fetched at.	300	settings.json
Data, backups and posters	Posters folder	Where posters are kept.	empty (the posters folder beside the database)	settings.json
Updates and notifications	Automatic updates	Checks GitHub at launch and every six hours.	on	settings.json
Updates and notifications	GitHub token	Only needed if the repository is made private.	empty	settings.json
Updates and notifications	Webhook address	Where event messages are sent.	empty	settings.json
Updates and notifications	E-mail on	Sends events by e-mail.	off	settings.json
Updates and notifications	Mail server	The outgoing mail server.	empty	settings.json
Updates and notifications	Port	The port of the mail server.	587	settings.json
Updates and notifications	Account	The account to send from.	empty	settings.json

Section	Option	What it does	Default	Stored in
Updates and notifications	Password	The password of that account.	empty	settings.json
Updates and notifications	Recipient	Who receives the e-mail.	empty	settings.json
Updates and notifications	Events	Which events are sent: new request, daily summary, backup failed, scheduled job overdue, family portal not reachable, episodes airing.	All ticked	settings.json
Plex	Plex address	The address of the Plex server.	http://192.168.1.204:32400	settings.json
Plex	Plex token	The token that lets MediaLedger read from Plex.	empty	settings.json
Plex	Paste the XML address	Takes the token out of an address copied from Plex.	empty	settings.json
Plex	Sync after each scan	Runs a sync whenever a scan finishes.	off	settings.json
Plex	Path mapping	How a path as Plex reports it translates to the path MediaLedger knows.	Worked out on the first sync	settings.json
Plex	Webhook enabled	Accepts reports from Plex.	off	settings.json
Family portal (administration)	Name	Who the invite is for. Requests arrive under this name.	empty	portal.json
Family portal (administration)	Expires	How long the invite works.	never expires	portal.json
Family portal (administration)	May browse, use tonight, request	What the person may do.	All three	portal.json
Family portal (administration)	Public address	What people away from home open.	empty	portal.json
Family portal (administration)	Home address	A name served on your own network.	empty	portal.json
Family portal (administration)	Portal on	Starts or stops the portal.	off	portal.json
Family portal (administration)	Port	The port the portal listens on.	8090	portal.json
Family portal (administration)	Reachable from	This machine only, or the whole network.	this machine only	portal.json
Family portal (administration)	Check the addresses every	Minutes between automatic checks.	15	portal.json
Family portal (administration)	Show my star ratings	Whether the portal shows your stars.	on	portal.json
Family portal (administration)	Admin sign-in from outside	Lets an administrator sign in at the portal address followed by /admin.	unticked	portal.json
Security	Current password	Your password now.	empty	web.json
Security	New password	The password to change to.	empty	web.json
Security	LAN only	Refuses every address outside your network.	on	web.json
Security	Sign out when idle	Minutes without activity after which a session ends.	0	web.json
Security	Guest access	Lets people look without signing in, read-only.	off	web.json
Security	Role	The role of that user.	–	web.json
Security	New user	The name of the account to add.	empty	web.json

Section	Option	What it does	Default	Stored in
Card options dialog	Title	Replaces the name printed on the card.	The name from the catalog	Account preferences: web.json (web server) or settings.json (desktop)
Card options dialog	Size	The width of the card.	Per card	Account preferences: web.json (web server) or settings.json (desktop)
Card options dialog	Amber threshold	The value at which the tile turns amber.	Per card	Account preferences: web.json (web server) or settings.json (desktop)
Card options dialog	Red threshold	The value at which the tile turns red.	Per card	Account preferences: web.json (web server) or settings.json (desktop)
Card options dialog	Options shown	How much this dialog offers.	Standard	Account preferences: web.json (web server) or settings.json (desktop)

11.1 What is remembered in the browser only

What	Where it is set
Colour theme	Settings, Appearance (and the portal's Settings page)
Table or poster wall	The Posters button of any list
Trend period of the Dashboard	The period list above the cards
Filters of Watch tonight, Watched and Reclaim space	On those pages
The number beside "Select next"	The rename pages

12. Keyboard shortcuts

MediaLedger is operated with the mouse or by touch. It defines no application-wide shortcuts and no menu of its own; the keys below work inside fields and dialogs.

Key	Where	What it does
Escape	Any dialog	Closes the dialog without saving.
Enter	Tag field on a series or movie page	Adds the typed tag.
Enter	Search words in the Match dialog	Starts the search.
Enter	Path in the folder browser	Opens the typed path.
Enter	Sign-in and confirmation dialogs	Submits the dialog.
Alt	Desktop application	Shows the standard Electron menu bar, which is hidden by default. MediaLedger defines no menu of its own and no application-wide shortcuts.

Standard browser and Windows keys apply as usual: Tab moves between fields, Space ticks a box, and in the desktop application F11 and the window keys behave as in any window.

Not present	Note
Context menus	None. No right-click menu is defined anywhere in the renderer.
Toolbars	No application toolbar. Pages carry their own filter row, listed with each page.
Application menu	None defined. The desktop window hides the default Electron menu bar.
Light theme	None. All eight colour themes are dark.

13. Troubleshooting and frequently asked questions

Question or symptom	Answer
The roots show "Share not mounted" on the Raspberry Pi.	The file server answers but the share is not mounted, usually after a restart. From version 1.12.1 the application nudges the mount itself and a watchdog mounts it within a minute. If it stays red, run <code>sudo mount /mnt/media</code> on the Pi and read the message.
The site cannot be reached by its name, but works by address.	The name is not being resolved. A virtual private network on your computer often sends lookups to its own servers, which do not know names on your network. Add the name to the hosts file of the computer, or point the network at your router for lookups.
The Watched page is empty.	Play history is pulled during a Plex sync. Run one under Settings, Plex, and set the sync timer under Schedules.
The Missing page is dominated by one very long series.	Press Collect on that series and choose "from an episode onward", or mute it.
A movie shows up that is really an episode.	It is listed under Issues, Problems, "Episodes filed under Movies". Move the file to a TV or anime folder.
Plex reports hundreds of unmatched files.	Read the table under the last sync. "File is not in a scanned root" means a Plex library MediaLedger does not scan; "no path mapping covers this folder" means a mapping is missing.
Create invite is greyed out.	Set a public or home address on the Family portal page and save first.
The invite link says the site cannot be found.	A new Tailscale address takes about fifteen minutes to appear on the internet. The tiles on the Family portal page tell you when it works.
Windows warns about the installer.	The installer is not code-signed. Choose More info, then Run anyway.
Editing the Dashboard is slow.	Update to version 2.1.1 or newer, which no longer reloads the data on every edit.
I forgot the web password.	On the Raspberry Pi run <code>sudo medialedger --set-password</code> .
How do I move to a new computer or a new card?	Install MediaLedger, then use Restore with your latest backup set and tick settings and accounts.
Does MediaLedger ever delete or move my media?	No. It renames files only on the two rename pages, only when you switch renaming on, and every rename can be undone. It never deletes media.
Does anything leave my network?	Episode lookups go to TVmaze and AniList, poster lookups to the same two, and the update check to GitHub. Nothing about your library is sent; the lookups contain only series names.

13.1 Every message in one place

Message	Where	Meaning and what to do
Wrong user name or password	Sign-in dialog (web server)	The pair did not match an account. The attempt is counted towards the lockout.
Too many failed attempts; this address is locked for 15 minutes	Sign-in dialog (web server)	Wait, or sign in from another address. The lockout is per address, not per account.
No account exists yet. On the server run: <code>sudo medialedger --set-password</code>	Sign-in dialog (web server)	The server has never had a password set. Run the command on the Raspberry Pi.
Enter the 6-digit code from your authenticator	Sign-in dialog (web server)	The password was right; two-factor codes are on and the code is the second step.
<job> is overdue: last ran N h ago, expected within N h	Dashboard	A scheduled job has not run for twice its interval. Open Settings, Schedules.
Family portal: <address> is not reachable	Dashboard	The server could not open its own portal address twice in a row. Open Family portal.

Message	Where	Meaning and what to do
MediaLedger <version> is available	Dashboard	Web server only. Run the update command on the Raspberry Pi.
Layout not saved: <reason>	Dashboard, edit mode	The arrangement could not be stored on the server. It is kept in this browser and saved on the next change.
HTTP 403 from graphql.anilist.co	Missing episodes	AniList refused the request, usually because too many were sent. It is tried again on the next lookup.
no match	Missing episodes	Neither service had a series with a close enough name. Use Match.
Nothing found	Match dialog	The service had no series for those words. Shorten them or try the other service.
moov atom not found	Issues: Problems	ffprobe could not read the file: it is incomplete or damaged.
no season or episode found in the name	Issues: Problems	The name has no recognisable marker. Use Fix.
None of these titles is linked to Plex on this machine	Reclaim space	There is no play data behind the list. Sync Plex here, or open the page on the server that does.
Nothing matches; loosen the filters	Watch tonight	No title passes every filter.
Nothing here yet	Watched	No history has been pulled. Run a Plex sync.
Renaming is off	Movie names	Switch it on under Settings, Renaming.
target exists	Movie names	A file with the proposed name is already there. Nothing is overwritten.
size changed since the scan	Movie names	The file was altered after it was scanned. Scan again.
scan skipped: rename batch in progress	Rename TV / anime	A scan was due while a batch was running. It runs at the next opportunity.
not reachable	System	A root or disk could not be read. Check the mount.
Set a public or home address first	Family portal (administration)	An invite needs an address to build its link.
<name> already has an active invite; use New link on it	Family portal (administration)	One active invite per name.
port N is already in use	Family portal (administration)	Another program listens on that port. Choose another.
the name does not resolve (DNS)	Family portal (administration)	The address check could not look the name up. A new Tailscale address takes about fifteen minutes to appear.
a different MediaLedger portal answers on this address	Family portal (administration)	The name points at another server.
Password must be at least 8 characters	Security	Choose a longer password.
Please re-enter your password for this action	Security	The action is sensitive and your last confirmation is too old.
LAN only	Security	The request came from outside your network and was refused.
That code is not right	Two-factor setup	The six digits did not match. Check the clock of the phone and try the next code.
Share not mounted	Settings: Appearance and Library roots	The file server answers but the share is not mounted. On the Raspberry Pi: sudo mount, or wait a minute for the watchdog.
does not answer on port 445	Settings: Appearance and Library roots	The file server is off or unreachable.
ffprobe not found	Settings: Scanning, ffprobe, lookups and folder watch	Press the download button, or point the path at an existing ffprobe.
No backup folder set	Settings: Data, backups and posters	Type a folder before backing up.

Message	Where	Meaning and what to do
The posters folder is not writable	Settings: Data, backups and posters	The folder does not exist or the application may not write there. On the Raspberry Pi, mount the share for the medialedger user.
Copied backup is empty	Settings: Data, backups and posters	The copy failed; the folder may be full or read-only.
No webhook or e-mail configured	Settings: Updates and notifications	Set one before testing.
Plex rejected the token (401)	Settings: Plex	The token is wrong or has been revoked. Take a new one.
Could not reach Plex	Settings: Plex	The address is wrong or the server is off.
The backup failed its integrity check	Restore from a backup dialog	The file is damaged. Choose another set.
The backup is schema vN; this build understands up to vM	Restore from a backup dialog	The backup is from a newer version.
A scan is running; restore when it has finished	Restore from a backup dialog	Wait for the scan.
The server refused the username or password	Settings: Network shares (Raspberry Pi server)	The file server answered but did not accept the sign-in. Check both and that the account may read the share.
... did not answer as a file server. Check the address and that file sharing (SMB) is on	Settings: Network shares (Raspberry Pi server)	Nothing answered at that address, or it does not share files.
The share helper did not answer	Settings: Network shares (Raspberry Pi server)	The helper that does the connecting is not running on the Pi. Run the command the message names.
That share was not connected from here	Settings: Network shares (Raspberry Pi server)	The share was made by the installer; remove it in /etc/fstab.
The server refused the username or password	Connect a network share dialog	Wrong sign-in, or the account may not use that share.
The server has no share with that name	Connect a network share dialog	Typed by hand and misspelt, or removed on the file server.
The server did not answer. Check the address and that it is switched on	Connect a network share dialog	Nothing answered at that address.
The server address must be an IP address or a name, like 192.168.1.204 or nas.home	Connect a network share dialog	The address field holds something else, for example a path with slashes.
Connect a share first (step 1)	Welcome guide	Find them for me has nowhere to look yet.
No folders with the usual names. Use Browse...	Welcome guide	The folders are named differently; pick them by hand.
Saved, but check step 3	Welcome guide	At least one folder could not be read. Step 3 says which.
Could not reach GitHub	About	No connection, or GitHub is limiting requests. Try later.
Invite needed	Family portal: Library	Open the invite link on this device.
Too many requests; wait a minute	Family portal: Library	The portal limits how fast one device may ask.
Not in the library	Family portal: a series	The title was removed since the list was loaded.
That is a lot of requests; try again in an hour	Family portal: Requests	The hourly or daily limit was reached.
Type the title	Family portal: Requests	The title is missing or too short.
Your invite does not include this	Family portal: Requests	The invite was made without permission to request.
Only an admin account can sign in here	Portal admin: Requests	The account is a standard one.
Too many attempts; wait fifteen minutes	Portal admin: Requests	Twelve sign-in attempts from one address in fifteen minutes.

Message	Where	Meaning and what to do
Not available	Portal admin: Requests	Admin sign-in from outside is switched off.
... already has an active invite; use New link on it	Portal admin: Invites	There is an active invite with that name.
Give the invite a name	Portal admin: Invites	The name field is empty.
That job cannot be started from outside	Portal admin: Status	Only the listed routine jobs may be started here.

14. Glossary

Term	Meaning
Root	A folder MediaLedger scans, with a type: TV, Anime, Movies, Web videos or Adult.
Scan	Walking the roots to find files, then measuring new and changed files with ffprobe.
Probe	Reading the technical details of one file with ffprobe: length, resolution, codecs, languages.
Match	The online listing a series is compared with.
Locked match	A match you chose; automatic lookups leave it alone.
Collecting policy	What counts as missing for one series: everything, from an episode onward, or nothing.
Fix	A correction of how a file is read, stored in the database and applied on every scan.
Batch	One run of the rename tool over a group of files, checked as a whole, recorded and undoable.
Dry run	A batch that records what would happen and changes nothing.
Snapshot	One row a day describing the library, from which the trend cards are drawn.
Card	One element of the Dashboard.
Backup set	The files of one backup, sharing a date stamp: database, settings, and on the web server the accounts and portal files.
Invite	Permission for one person to use the family portal, given as a link.
Family portal	The separate read-only site for invited people.
Role	What an account on the web server may do: administrator, standard or guest.
Two-factor codes	Six-digit codes from an authenticator application, asked for after the password.
Webhook	An address another program calls when something happens.
Reverse proxy	A program such as Caddy that receives requests for several names on one machine and hands each to the right service.
Sub, dub, dual	Original audio with subtitles; audio in your language; both audio tracks present.
Square-root scale	A chart scale on which a small value is still visible beside a large one. The printed numbers are exact.