

SQMS DFX System

System Architecture Overview
Operation Guide



- What is DFX
- How Delta Execute DFX before?
- Smart Quality Management System – DQA DFX
 - Architecture & Roles and Responsibility
 - Operating Instruction


What is DFX

DFX

=

Design for
Excellence

Excellence in design, and the word “Excellence” can be extended to various fields and oriented, hoping that the product can be designed more excellent and perfect.

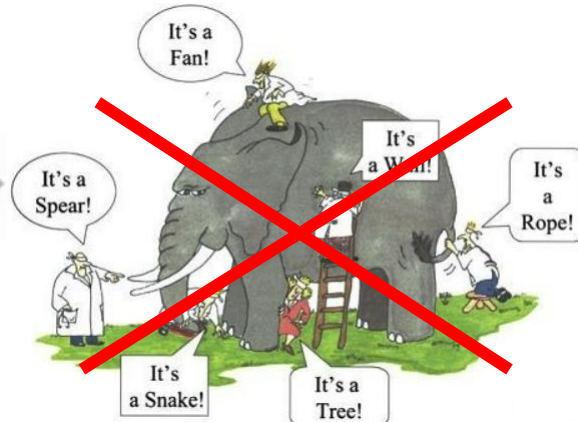

- What is DFX
- How Delta Execute DFX before?
- Smart Quality Management System – DQA DFX
 - Architecture & Roles and Responsibility
 - Operating Instruction
- Q&A

How Delta Execute DfX



DELTA ELECTRONICS, INC.

DfX Score Card Report

Rev. A14

2021/01/20

BG/BU :

☐ HF
 ☐ 300-HF
 ☐ Power Supply
 ☐ Adapter
 ☐ ISO13485
 ☐ TS16949
 ☐ ISO 9001

Model Name		Customer		Class	
Place of Manufacture		Review Date			
Function Team Member		Thermal	Magnetic	QE	Safety
Layout	SWQA	IE	CPC	Cost	
EE	Mfg (NUDD)	Spec	TE		
CE (NUDD)	Ultrasonic	Tooling	QA		

Function	Stage	RFQ	RFQ	EV1	EV2	DVT
Product Revision		RFQ				
DfX Target		N/A	Fail	Fail	Fail	Fail
			* EV1 > 90%			
			* EV2 > 96%			
			* DVT > 95%			
Layout	DfX PWB layout	N/A	DEIC	DEIC	DEIC	DEIC
EE	DfEee electrical	DRFMEA	DEIC	DEIC	DEIC	DEIC
CE	DfEee&ME Component	N/A	DEIC	DET	DET	DET
FE	DfF firmware	N/A	DEIC	DEIC	DEIC	DEIC
SWQA	DfEeqs software quality assurance	N/A	DEIC	DEIC	DEIC	DEIC
ME	DfA assembly	DRFMEA	DEIC	DET	DET	DET
			DEIC	DET	DET	DET
ME	DfMud&me customer	N/A	DEIC	DEIC	DEIC	DEIC
ME	DfC&b cable parts	N/A	DEIC	DEIC	DEIC	DEIC
Ultrasonic	DfU Ultrasonic	N/A	DEIC	DEIC	DEIC	DEIC
Thermal	DfTh thermal	N/A	DEIC	DEIC	DEIC	DEIC
	DfM manufacturing	DRFMEA	DEIC	DET	DET	DET
IE	DfAuto manu/facturing	N/A	DEIC	DET	DET	DET
Spec	DfCs component standard	N/A	DEIC	DEIC	DEIC	DEIC
	DfMnt metal Case Tooling parts	N/A	DEIC	DET	DET	DET
ME	DfPt plastic tooling parts	N/A	DEIC	DEIC	DEIC	DEIC
			DEIC	DET	DET	DET
Magnetic	DfMag magnetics	N/A	DEIC	DET	DET	DET
			DEIC	DET	DET	DET
CE	DfCe component	N/A	DEIC	DET	DET	DET
CPC	DfFee COS/Coat	N/A	DEIC	DEIC	DEIC	DEIC
Spec	DfFms nutlike source	N/A	DEIC	DEIC	DEIC	DEIC
TE	DfT testing	N/A	DEIC	DET	DET	DET
TE	DfAuto test	N/A	DEIC	DET	DET	DET
QA	DfQ quality	N/A	DEIC	DET	DET	DET
QE	DfR reliability	N/A	DEIC	DEIC	DEIC	DEIC
Safety	DfR safety and Reliability	N/A	DEIC	DEIC	DEIC	DEIC
Cost	DfQc RFQ cost	N/A	N/A	N/A	N/A	N/A
	DfQc Internal cost	N/A	DEIC	DEIC	DEIC	DEIC
Product Design		N/A	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
Average	Product Support	N/A	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!
	Product Verification	N/A	#DIV/0!	#DIV/0!	#DIV/0!	#DIV/0!

SQMS-DFx Structure overview

DFx Architecture

System Link

PJM Kick off Task

[illegible]

Updated Dfx via OA

E-8D



Issue Mgr.

Jira

Issue Mgr.

Issues

SQMS-ISSUE / SQMSISSUE-717973

SDHV24W100AG-EVT1(EVT)1-A-000004

Edit

Add comment

Assign

More

In Change

Details

Type:

Dfx Test Failed

Priority:

High

Component/s:

DQA

Project Kick off

Database Maintain

Online Scoring

Issue Management

Data Analysis

Gate Control

Features

Mini Tools

[illegible]

Mini Professor




Design Guideline

Procedure Define


DFx item



Dashboard

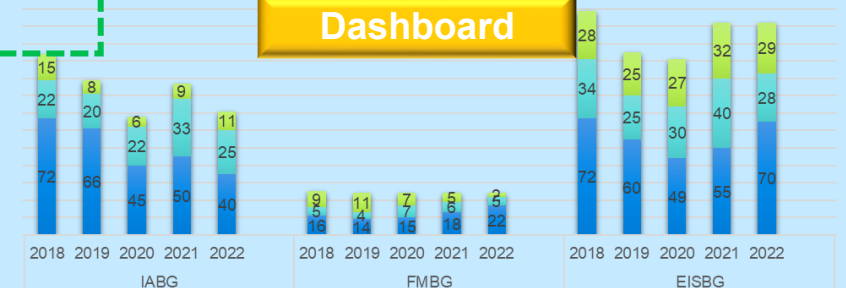

Platform of whole DFx system

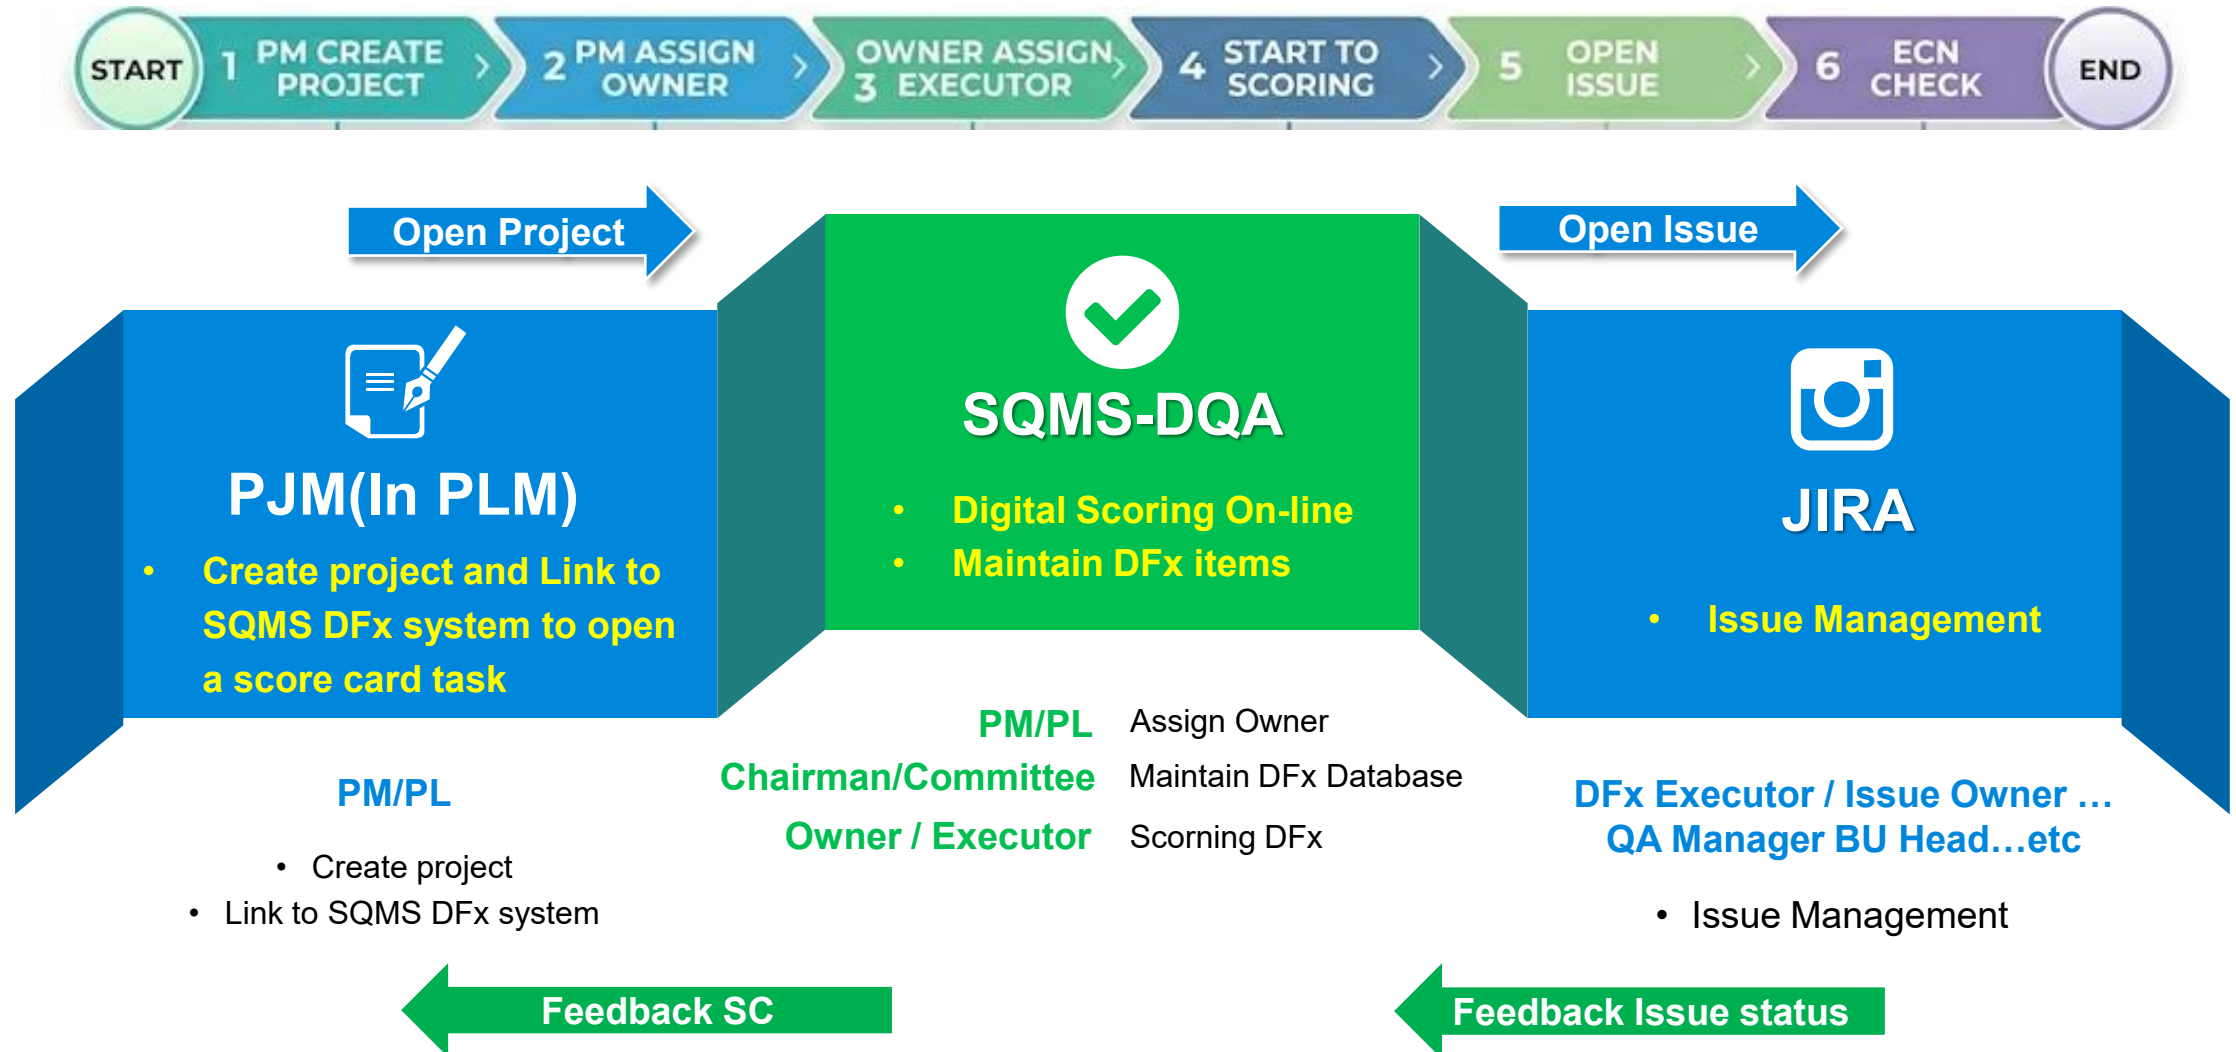

Excel-Based vs. Online System Evaluation

Drawbacks of Continuing to Use Excel



Version Chaos & File Conflicts



Low Efficiency & Time-Consuming



High Risk of Human Errors



Lack of Data Security



Poor Collaboration



Limited Data Analysis & Visualization



Data Inconsistency & Silos



Difficult to Track Changes



Weak Auditability & Compliance



Hard to Scale & Maintain

V.S.

Benefits of Using a System



Real-time Data & Updates



Higher Efficiency & Automation



Improved Data Accuracy & Consistency



Stronger Data Security & Access Control



Better Collaboration & Transparency



Advanced Analytics & Visualization



Centralized Data & Single Source of Truth



Full Traceability & Version Control



Auditability & Compliance Ready




Scalability & Easy Maintenance


Architecture & Roles and Responsibility

Rules and Regulations of DFX items

Every DFX clause is established with **BG**, **Stage**, and **PA** information

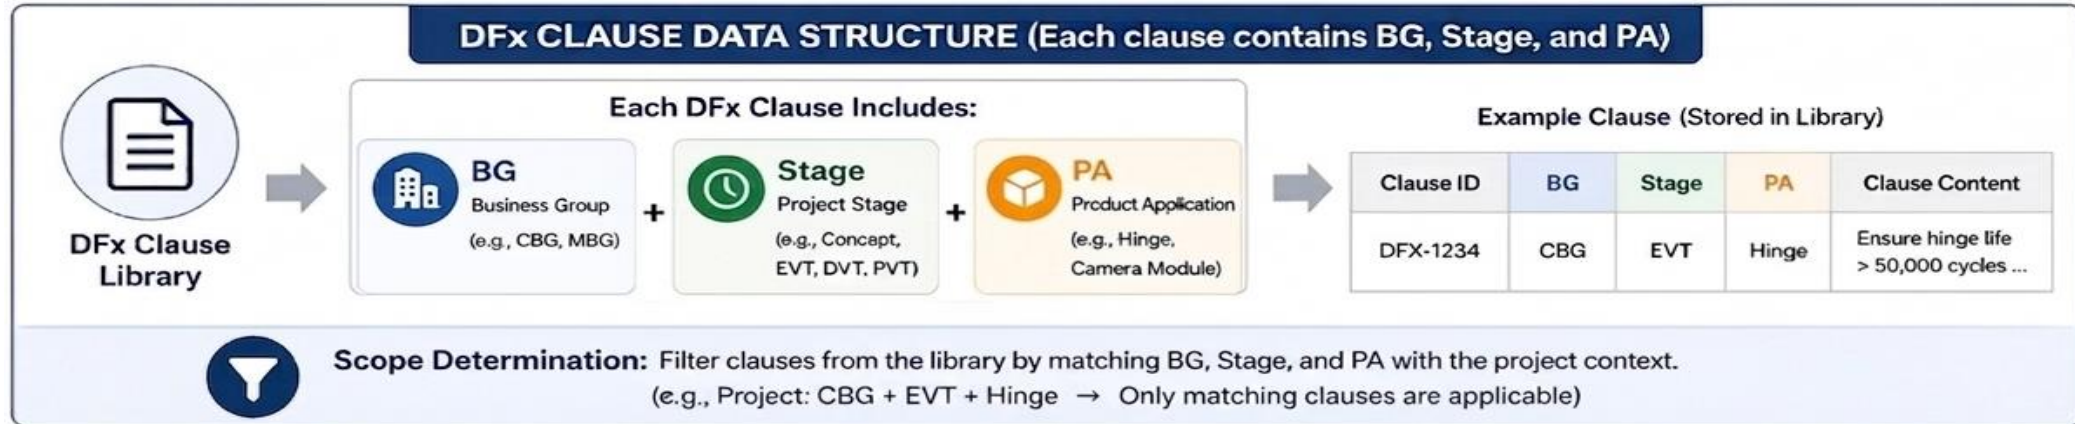

PA breaks BU boundaries and enables cross-BU clause sharing

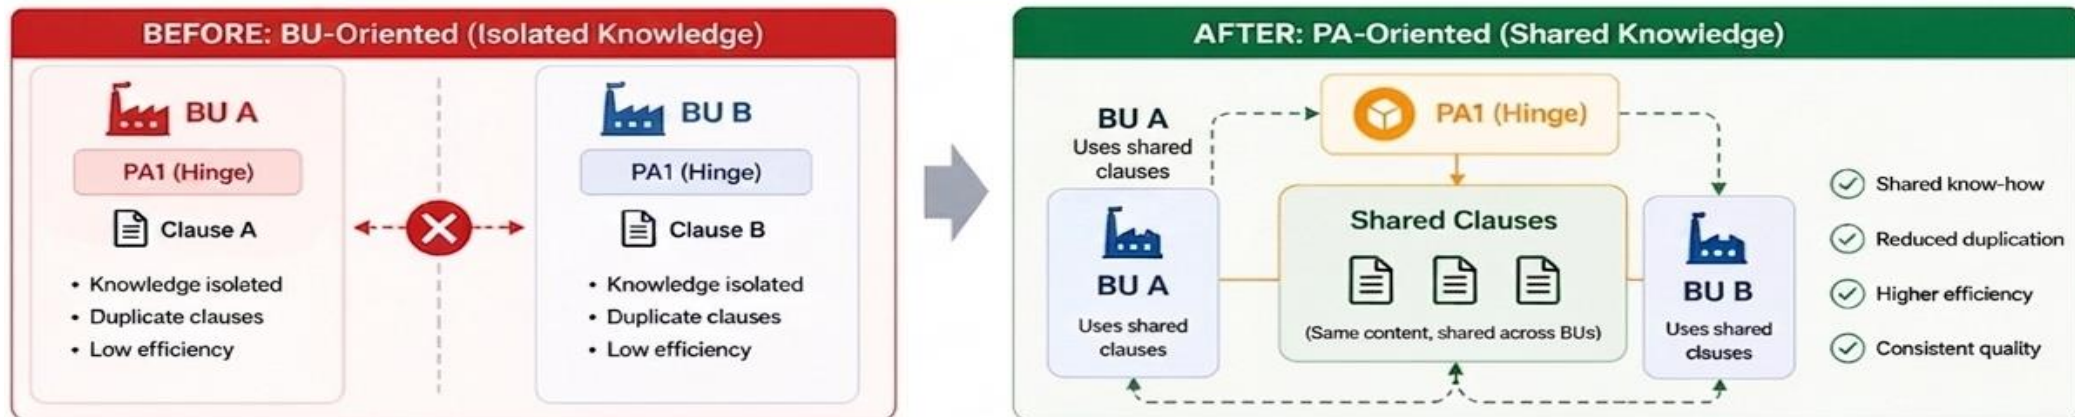

By defining DFX clauses with BG, Stage, and PA, we leverage PA as the key dimension to connect different BUs and enable reuse of best practices across BUs.

What's PA?

Product Application Introduction - Label attributes belonging to three levels

PA=Level1/Level2/Level3

◆ Three Levels of PA



Level 1
產品

- ◆ **Level 1 產品** = Defines the product type as a single option when creating a project.
Like: Adapter、UPS、PSU...etc

BG	Product	Product Description (for PM)
PSBG	Adapter	將AC轉換成DC的外置電源供應器，為可移動設備，工作模式為CV模式，不是CC架構。
PSBG	Charger	是一種可以透過變壓器或通過不來相提供輸入電壓並加以整流，充電器可具有溫度感測器以確保電池不超過過充電值，以安全地調節充電電流和電壓，並在充電結束時切斷。
PSBG	DC-DC Converter	DC/DC轉換器是一種從DC轉換成DC的模塊，將欲改變一種利用DC轉換電壓的裝置，IC等電子機器由於可動作之電壓範圍各自不同，因此需要一最佳化之變壓。
PSBG	Power Board	內部於系統板中將AC轉換成DC的電源板，沒有電源板外殼，為Open Frame產品。
PSBG	PSU	Power Supply Unit 電源供應單元，主要功能為將標準AC轉換成穩定的DC，或直接将DC轉換成穩定的DC結果能帶來的器材使用，與Adapter差異為通常為不可移動且為機殼外殼，而輸出通常為多組電壓 / 電流。
PSBG	UPS	不斷電系統Uninterrupted Power Supply是在應變電源系統（如停電、欠壓、干擾或頻率調節時提供下不間斷的高電壓負載電提供保護交流電源，供電裝置正常運作的裝置，當電壓以下不電力供給時供應電（尤其是伺服器），或交換機等關鍵性使用裝置保護數據的不間斷運行，防止數據資料遺失，電腦硬件損壞或中斷微電腦失控制。



Level 2
產業

- ◆ **Level 2 產業** = When creating a project, you can check it to define the industry that the product will use.
Like: IT、Industrial...etc

Industry	Industry Description (for PM)
IT	電腦硬體與軟體、網路與通訊技術、Data Center、Telecom、遊戲機、AR/VR、Monitor、Server、NB
Home Appliance	Domestic appliance, Electric appliance or household appliance，如家用電器、小家電、洗衣機、冰箱、冷氣、電視
Industrial	輕工業、重工業用相關設備產品



Level 3
應用

- ◆ **Level 3 應用** = When creating a project, you can check it to define a special application or customer.
If no, select General.
For example: NB、Type-C...etc


Product	Industry	Application / Customer	Remark
Adapter	IT	Notebook	筆電設備
		Networking	網通設備
		POS	銷售點終端機
		Printer	印表機設備
Charger	Industrial	Power tool	電動手工具
Power Board	Industrial	Industrial Equipment	工業設備
PSU	IT	Server	伺服器
UPS	IT	Data Center	資料中心



PA (Product Application) helps us classify DFX clauses more precisely and enables knowledge sharing across different BGs.

By defining product type, industry, and specific application/customer, we create a common language for better collaboration and reuse.

Rules and Regulations of DFx items

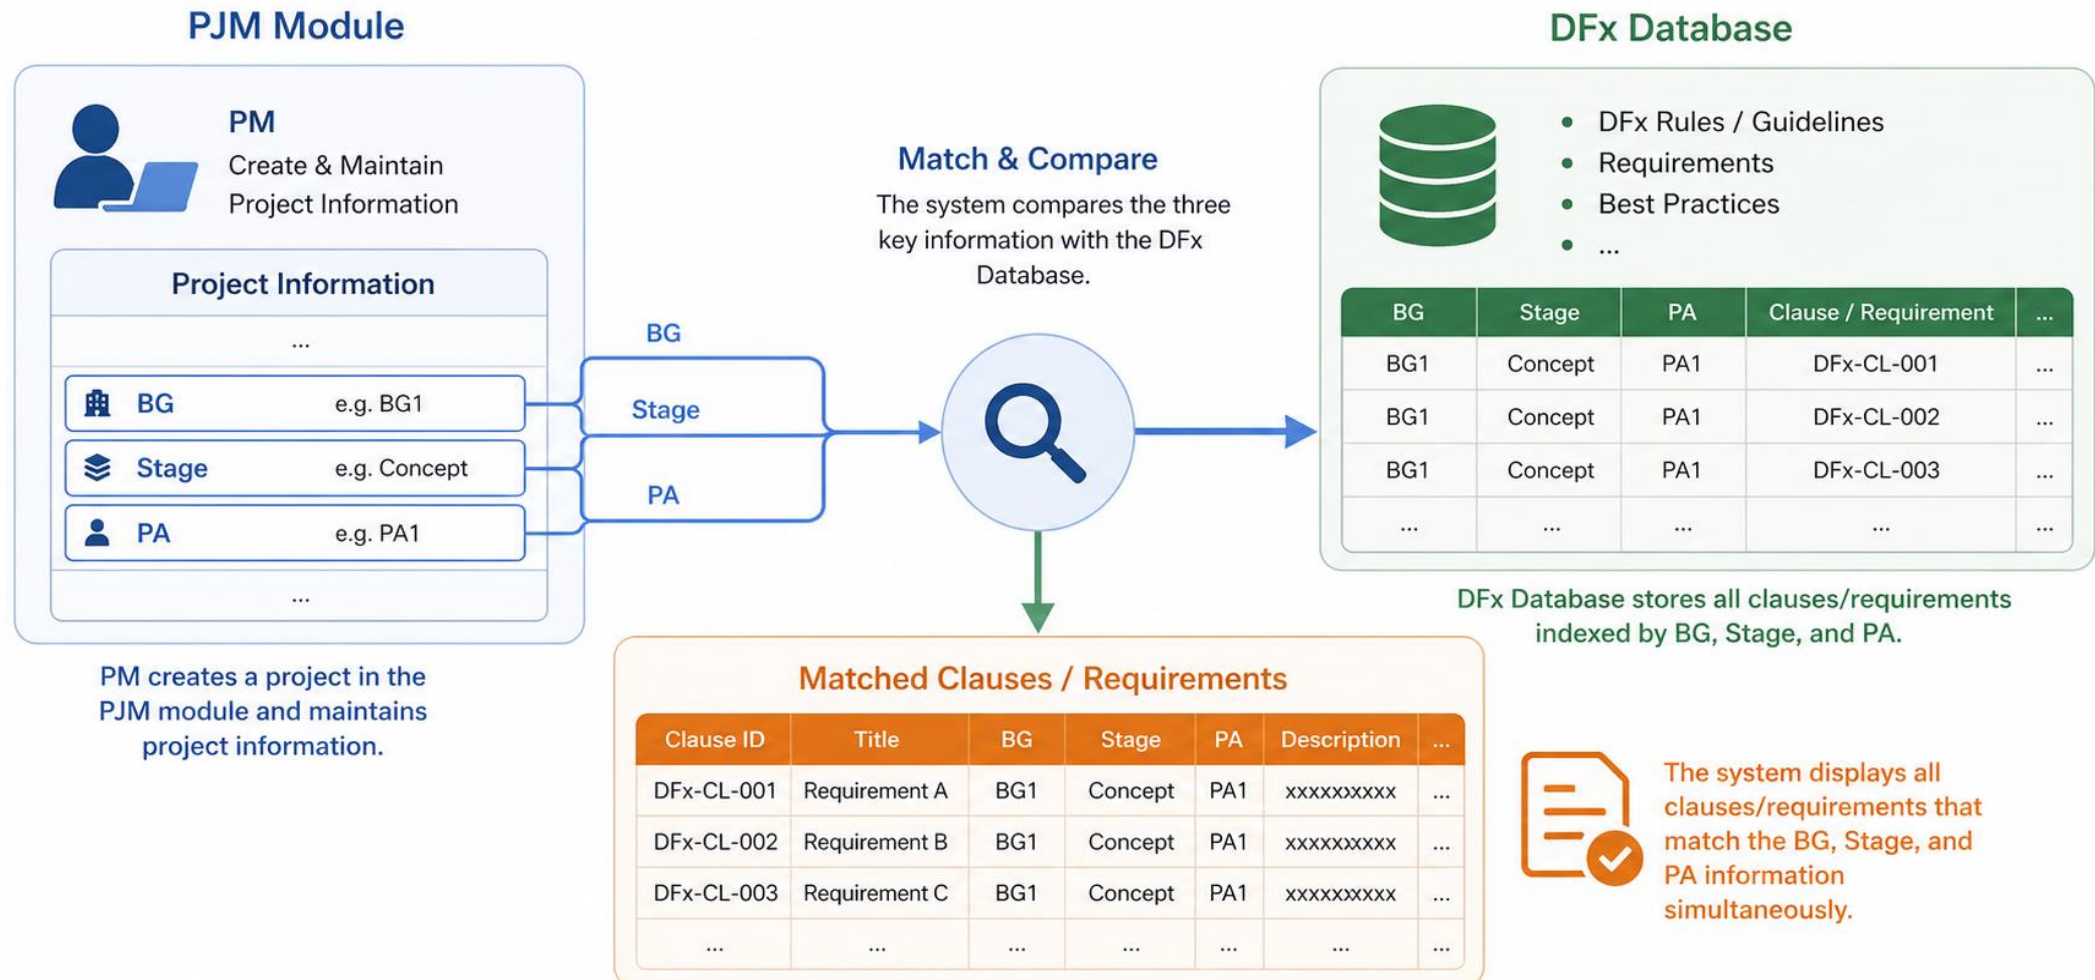

Roles and Responsibility



◆ Project Manager/ Project Leader

專案進度控管者，負責開案並收集分數的角色

A project progress controller who is responsible for creating projects and collecting scorecard

◆ DFx Owner/ Executor

各門派DFx的評分者或者是評分者的主管上司

The grader of each DFx or the grader's supervisor



◆ DFx Committee/Chairman

各門派的該BG代表，該門派的專家團隊成員，負責條文審查
Representatives of BG from each DFx, Expert team member, are responsible for DFx items database Maintain

DFx items Change Process



Who Can Initiate?

DFx Owner / DFX Committee / DFX Chairman
can request to **New** / **Revise** / **Delete** clauses.

Change Types



New



Revise



Delete

1 Submit Change Request



Submit change request
in DFX system
(New / Revise / Delete)

Initiator

DFx Owner / Committee /
Chairman

2 DFX Committee Approval



DFX Committee reviews
and approves the request
in OA.

DFX Committee

3 DFX Chairman Approval



DFX Chairman reviews
and gives final approval
in OA.

DFX Chairman

4 Release to DFX System



Once approved in OA
the clause is released
to the DFX system.

Clause Released



All clause changes go through Committee and Chairman approval in OA
before being released to the DFX system.

DFx Version alignment

- ECN進版邏輯：當所有issue closed後，cover page會進版做版本對齊，需要所有DFx門派別針對改版後的產品在進行一次評分確認
ECN Version Up-logic: Once all issues are closed, the cover page will be versioned up for synchronization. All DFx categories must then conduct a final scoring confirmation for the revised product.



Stage	EVT1(EVT)	EVT1(EVT)
Version	1	2
Status	All DFx Pass Submit	In Verification
Result	PASS	FAIL
ECN		
Product Revision		
Place of Manufacturing		
DFa	100	TODO
DFauto	100	TODO
DFb	100	TODO
DFcc	100	TODO
DFce	100	TODO
DFdc	100	Expire on 2023-02-21
DFelec	100	TODO

DELTA

Hello, Sir/Madam

There is a Scorecard Project Stage has been has In Verification, Please help verification the DFx Item.

Project Code 15868347147

BG: PSBG

BU: MMPBU

Project: MBC-PS001 A

Stage:

<https://sgms-dqa-dev.deltaww.com/#/ScoreCard/Project/Scoring/dd35cd86-510a-4c23-b7e6-04d16788240d>

(Attention, this link only can using in Delta internal web.)

Copyright © 2020 Delta IT, Inc. All Rights Reserved.

Project Manager: JUSTIN ST TSAI | Project Lead: JUSTIN ST TSAI | DFx Owner: ARTHUR MD CHANG | DFx Executor: ARTHUR MD CHANG, JACKLO, JOHN SY WU, NEIL H CHEN

Product Application: Power Board-IT-General | Stage: EVT1(EVT) | Model: MBC-PS001 A

DFx Info: DFx: DF1 | Threshold: 90 | DFx Status: In Process | [DFx Issue Log]

Product Revision	ECN	Version	EVT1(EVT)	EVT2	DVT	PVT	MP	Result	Total	Pass	Failed
RFQ	Prototype	Concept Design	Detailed Design	InVerification					61	61	0

Buttons: Save, Submit, InVerification

Table Item S:

ItemNo	ItemCat	Requirement	AP	Background	M	YES	NO	Score	Upload
A-000784	Component	1. ESD/TS 規格指定產品應用於外部環境時，應符合 EMC 測試標準，並符合 CE、CISPR XX 等之 EMC 標準。 2. 所有電子材料應符合 RoHS 指令。	H						
A-000785	Component	1. 所有產品應符合 EMC 測試標準，並符合 CE、CISPR XX 等之 EMC 標準。 2. 所有電子材料應符合 RoHS 指令。	H						
A-000786	Component	1. 所有產品應符合 EMC 測試標準，並符合 CE、CISPR XX 等之 EMC 標準。 2. 所有電子材料應符合 RoHS 指令。	H						

需先點擊此橘色按鈕，才能開始重新評分
You must click this orange button before you can begin the re-scoring process.

SQMS DQA_DFx interface introduction

DQA Homepage

DELTA SQMS DQA

Return to ARTHUR.MD.CHANG English Welcome, MINCHI LIN

DQA

設定評分窗口 **DFx Owner (PM/ PL)**

Assign DFX Owner

Assign DFX Executor

PA Working Days

PA BG Setting

設定 **DFx Due date (DFx Owner)**

設定評分者 **DFx Executor (DFx Owner)**

SCORECARD (DFx)

Project

Work List

Setting

Training Material Get Ready for DFX

資料庫設定 Database Setting (**DFx Owner/ DFX Committee**)

工作清單列表 Scoring Work List (**DFx Owner/ DFX Executor** , if you don't have any project, then you'll not see this icon)

專案清單列表 Project List (All people, if you don't have any project, then you'll not see this icon)

DQA Homepage > Project

 **SQMS DQA**

 FMEA

 Scorecard

 DQA

 ScoreCard(archived)

SwitchUser

English

Welcome, RUBY.LI

Search

模糊搜尋以下資訊
Fuzzy search for the following information

Project Status:

Undo

As

PM/Owner/Executor

Committee

Chairman

Corp or BG/BU Head

以其他權限檢視專案 (DFx Committee/ Chairman有權限閱讀該DFx執行結果)

切換開關分為->進行中/所有案件
Switch to -> In progress/All projects

Project Action	Stage Action	Project Name	Product	BG	BU	Customer	Product App
  	  	MP 2025-04-03 00:38:23 test0402_3	test0402_3	PSBG	CDBU		ITTest-IT-202
  	  	IMP 2025-04-02 18:46:08 test0402_2	test0402_2	PSBG	CDBU		ITTest-IT-202
  	  	DVI 2025-04-01 10:21:52 IT TEST SQMS	IT TEST SQMS 0401	PSBG	CDBU		ITTest-IT-202
  	  	TEST1111 2025-04-02 16:25:20	TEST1111	PSBG	APBU		Adapter-IT-G
  	  	test2 2025-06-06 14:30:30	test2	PSBG	APBU		Adapter-IT-G
  	  	FVT1(FVT)					

同專案同一時間內僅能有一個啟動中的評分任務

Only one scoring task can be started at a time for the same project

DQA Homepage > Project

 SQMS DQA

FMEA

Scorecard

DQA

ScoreCard(archived)

Return to ARTHUR.MD.CHANG

English

Welcome, AARON.LIN

Search

Display as Committee or Chairman

Model	BG	BU	Customer	Product Application	Project Manager	Project Lead	Project Code	Stage	Task ID	Version	Other Action
ADP-H001 A	PSBG	MMPBU		Adapter-Industrial-General	AARON.LIN		10088850935	EVT1(EVT)	2312332320 3		

Showing 1 to 1 of 1 entries

刪除專案 (PM/ PL在任一DFx Executor提供分數前可刪除專案)

Delete projects (PM/ PL can delete projects before any DFx Executor provides scores)

此功能主要避免兩種情境：

1. 專案資訊設定錯誤

2. 機種需要改名

This feature avoids two scenarios:

1. Project information setting error

2. Model needs to be renamed

20 Delta Confidential



**1. Create Project in PJM
to start a Smart-DFx**

1. 登入PLM系統(Log in to the PLM system)

- 瀏覽器請使用**Edge**或**Chrome**登入PLM系統(Please use Edge or Chrome to log in to the PLM system.)。
 - 測試環境(Test website) : <https://plmqa.deltaww.com/Windchill/app/#ptc1/homepage>
 - 正式環境(Formal website) : <https://plm.deltaww.com/Windchill/app/#ptc1/homepage>

Sign in to access this site

Please pay attention to whether you are logged in to the test area or the formal area.

Authorization required by <https://plmqa.deltaww.com> ※ 請留意自己登入的是測試區或正式區

Username

Password

Sign in Cancel

◎ 測試環境

Account : AD Name 帳號 : AD名稱
Password:123 密碼 : 123

◎ 正式環境


Account : AD Name 帳號 : AD名稱
Password: AD Password 密碼 : AD密碼

※ 備註 : AD名稱不用輸入@deltaww.com

進入PJM模組(Enter into PJM module)

- PLM系統中分為很多模組，PJM為進行專案管理的模組。

(The PLM system is divided into many modules. PJM is the module for project management.)

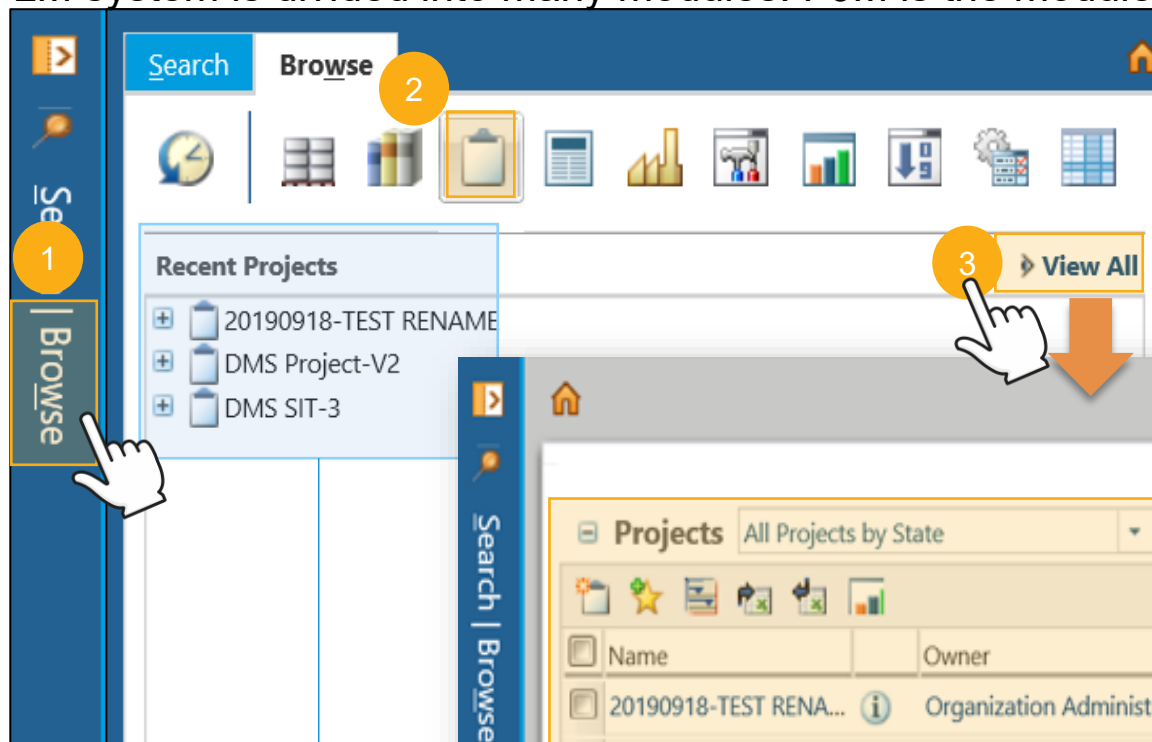

使用者會看到自己有權限的所有專案與相關基本資訊。Users will see all projects to which they have permission and related basic information.

※ Recent Projects
Not a list of all projects, only selected projects are displayed.
非所有專案清單，
僅呈現有點選過的專案。

The screenshot shows the 'Projects' table in the PJM module. The table has columns for Name, Owner, Host, Category, and Phase. It displays four projects: '20190918-TEST RENA...', 'DMS Project-V2', 'DMS SIT-4', and 'DMS SIT-3'. The table is titled 'Projects' and 'All Projects by State'. A search bar is located at the top right of the table. The status '(4 objects)' is shown at the top right, and '(0 objects selected)' is shown at the bottom left.

Name	Owner	Host	Category	Phase
20190918-TEST RENA...	Organization Administrator	Delta	General	Kickoff
DMS Project-V2	MARTINA.HUANG	Delta	General	Kickoff
DMS SIT-4	angus.chi	Delta	General	Kickoff
DMS SIT-3	angus.chi	Delta	General	Kickoff

PJM開立專案-1(PJM Create Project--1)

1 建立新專案Create new project

2 系統依組織設定，自動帶出適用的專案類型The system automatically brings out applicable project types based on organizational settings.

3 設定專案名稱fill in project name

4 請按左圖選擇選單內容

5

6

7

New Project

*Type: Project EVSBG

Attributes

*Context Name: anteia.tseng_training project.1

*Business Type: ODM

*Function Type: Hardware

*Product Type: ALL

*Template: EVSBG_PT_(ODM_HW_Class B_APABU from prototype)

*Owner: anteia.tseng

5

6

7

8

Find Plan Template

Project Type: Project EVSBG

Business Type: ODM

Function Type: Hardware

Product Type: ALL

Plan Template Name:

Results (5 objects)

Plan Template ID	Plan Template Name	BG Name	Business Type	Function Type	F
EVSAPDHWB02024090301	EVSBG_PT_(ODM_HW_Class B_APABU from prototype)	EVSBG	ODM	Hardware	A
EVSAPDHWB02024100101	EVSBG_PT_(ODM_HW_Class C_APABU from DV)	EVSBG	ODM	Hardware	A
EVSAPDHWB02024100101	EVSBG_PT_(ODM_HW_Class D_APABU from PV)	EVSBG	ODM	Hardware	A
EVSBGDHWB02024100101	EVSBG_PT_(ODM_HW_Class B_Inverter Form)	EVSBG	ODM	Hardware	A
EVSEMDHWB02024100101	EVSBG_PT_(ODM_HW_Class B_EMBU From RFQ)	EVSBG	ODM	Hardware	A

(0 objects selected)

● 維護專案基本資料Maintenance project basic information :

1. 選擇適用專案範疇定義的範本Select the template that applies to the project scope definition
2. 專案名稱Project name(僅可輸入英文，請勿輸入中文或特殊符號Only English can be entered, please do not enter Chinese or special symbols)

PJM開立專案-2 (PJM Create Project--2)

選擇Product Code，系統自動帶出BG/BU
Select Product Code and the system will automatically bring up BG/BU

輸入Product Code後加*才能查出資料
Enter the Product Code followed by * to find out the information

Budget:

Rational Project Area Link: URL:

Choose Organizations Information

*Authorization Group: 

*BG:

*BU:

Project Related Information

Project No.:

Customer Name:

*Product Name:

* Indicates required fields.

plmqa.deltaww.com/Windchill/netmarkets/jsp/ext/delta/edm/attributes/authGroupPic...

Find Product Name

Product Name: 

Authorization Group (1 objects)

prodCode	prodName
168A	168A-Automotive Traction Inverter

(0 objects selected)

PJM開立專案-3

(PJM Create Project--3)

New Project

Project Related Information

Project No.:

Customer Name:

* Product Name:

anteia.tseng_training project.1

RFQ Number:

Related System:

Rational

+

SQMS-DFMEA

-

SQMS-Dfx

-

DMS

-

Remark:

若要串接SQMS系統，請務必填寫上面區塊的Model Name(必要資訊)，以及此區塊的資訊(*代表必要資訊)。建立專案後，專案成員需維護Project Leader。

Model Name:

test

+

* Product Application:

ITTest

ITTest

* Product Application Child Node:

IT-General

IT-General : For EISBG

Project Class:

A

Project Phase:

RFQ

☒ Allow sharing to other projects and programs

☐ Identify out-of-sync shared objects

☐ Start project and send invitations to team

Execution Control:

☐ Manually control project execution

☒ Automatically execute activities and deliver tasks

☒ Link deliverables with project activities

OK

Cancel

可自行定義Product Name

必填! 持續點擊2次【+】後，分別固定選擇【Rational、SQMS-DFMEA、SQMS-Dfx、DMS】
After clicking [+] twice continuously, select [Rational, SQMS-DFMEA, SQMS-Dfx, DMS] respectively.

輸入Model Name
Enter Model Name

專案等級Project level
目前專案階段 project stage

依BG/BU列出Product Application
依選擇的Product Application列出可選擇的Product Application Chile Node

List Product Application by BG/BU
Lists the selectable Product Application Chile Node according to the selected Product Application.

點擊OK
Click OK

圖一 * Indicates required fields.

26 Delta Confidential

PJM開立專案-4 (PJM Create Project--4)

專案建立成功

Project established successfully

系統會自動導向專案頁面

The system will automatically direct you to the project page

搜尋專案

Search project

亦可使用搜尋找到專案 You can also use search to find projects
使用右上角查詢功能，選擇 All Types 並輸入要搜尋專案名稱，按下搜尋
Use the search function in the upper right corner, select All Types and enter the project name you want to search for, then click Search

Projects > IT-Test-20210316-CP

Actions | Project CP - IT-Test-20210316-CP

Details | Maintain Project Team Member | Maintain Project Team History

Attributes | More Attributes

Attributes

Name: IT-Test-20210316-CP Number: 000902
State: Defined Status: ?
Owner: Organization Administrator
Description: Phase: Kickoff

System

Category: General
Private Access: Project Members Only
Synchronize Sharing: Manual synchronization only
Sharing Enabled: Yes
Sharing Filter:
Site:
Created By: Organization Administrator
Last Modified: 2021-03-16 11:53 CST
Template: Delta CPBG Project Template for 3D(Complete
Is New Project: Y
Authorization Group: 188C
BG: CPBG
BU: CSEBU

windchill PLM Production 12524@TWTPEPLMFG02

Search | Browse

Search History and Saved Searches | Advanced Search | Classification Explorer

<< Edit Search Criteria

Criteria: Keyword=LX766-L85VVEA;Type=All Types;Context=All Contexts

Search Results Default

	Number	Name	Context	Ver
	LX766-L85VVEA	EOL PROJECTOR H...	Part	B.2
		LX766-L85VVEA	LX766-L85VVEA	
	014337	LX766-L85VVEA	Delta	
		LX766-L85VVEA	LX766-L85VVEA	

(0 objects selected)

點選尋結果

Click to find results

Search | Browse

Recent Projects

- LX766-L85VVEA
 - Details
 - Folders
 - Workspaces
 - Network
 - Plan
 - Packages
 - Resources
 - Meetings
 - Tasks
 - Discussions
 - Templates
 - Reports

回到您的 Recent Project
中 即可找該專案
Back to your Recent
Projects
You can find the project

圖九

圖十

維護專案成員-1

Single maintenance project member

- 置換dummy_user Replace dummy_user

Project Manager跟Project Leader一定要有指派人員

Both Project Manager (PM) and Project Leader (PL) information is mandatory.

Project Manager 跟 Project Leader 一定要指派人員

Both Project Manager (PM) and Project Leader (PL) information is mandatory.

1

2

3

4

5

成功更換成員
Successfully changed members

- ## 置換dummy_user 將實際成員加至專案

維護專案成員-2

Single maintenance project member

- 角色增加成員 Adding members to a role

成功新增成員
Successfully added member

新增成員至角色中
Add members to the role

1. Project IA - DMS SIT-3

2. Maintain Project Team Member

3. Replace Member in Team - [InPrivate] - Microsoft Edge

4. Search for: User

5. Full Name: Morgan.lin

6. User Name:

7. Email:

8. Organization Name:

9. Search

10. Clear

11. Search Results:

12. Morgan.lin

13. Participant:

14. Morgan.lin

15. Add >>

16. Remove

17. OK

18. Cancel

Object Type	Roles/Members	Actions	Desc	Mani
dummy_manual				
Manufacture Quality Assura...			Manufacture Quality Assur...	Yes
dummy_mqa				
Manufacturing			Manufacturing	Yes
mei.wu				

1. 啟動專案-1 Start project

- 啟動專案 Start project

- 點選 Browse → Project → Details → Actions → Start

The screenshot shows the software interface for project management. The left sidebar has a 'Browse' button highlighted with a yellow box and the number 1. The top navigation bar has 'Search' and 'Browse' tabs. The main content area shows the 'Project IA - DMS SIT-3' details. The 'Actions' menu is open, and the 'Start' button is highlighted with a yellow box and the number 4. A yellow arrow points from the 'Start' button to a 'Running' status indicator in the top right corner of the main content area.

Recent Projects

- DMS SIT-3
 - Details
 - Folders
 - Network
 - Plan
 - Plans
 - Packages
 - Resources
 - Meetings
 - Tasks
 - Discussions
 - Reports

Actions

- Start
- Edit
- New Part
- New Multiple Parts
- New Baseline
- Create Plan
- Import from File
- Save As New Project
- Save as Template
- Export as Template
- Export to File
- Add to Favorites
- Remove from Favorites
- Edit Access Control
- Subscribe

Defined ?


Running ?

★ 專案啟動後，才能做往下啟動WBS
After the project is started, you can start the WBS

啟動計畫(WBS) -1 Start Project

- 啟動專案計畫Start Project

- 點選Browse → Project → Plan → Actions → Start Autoexecution

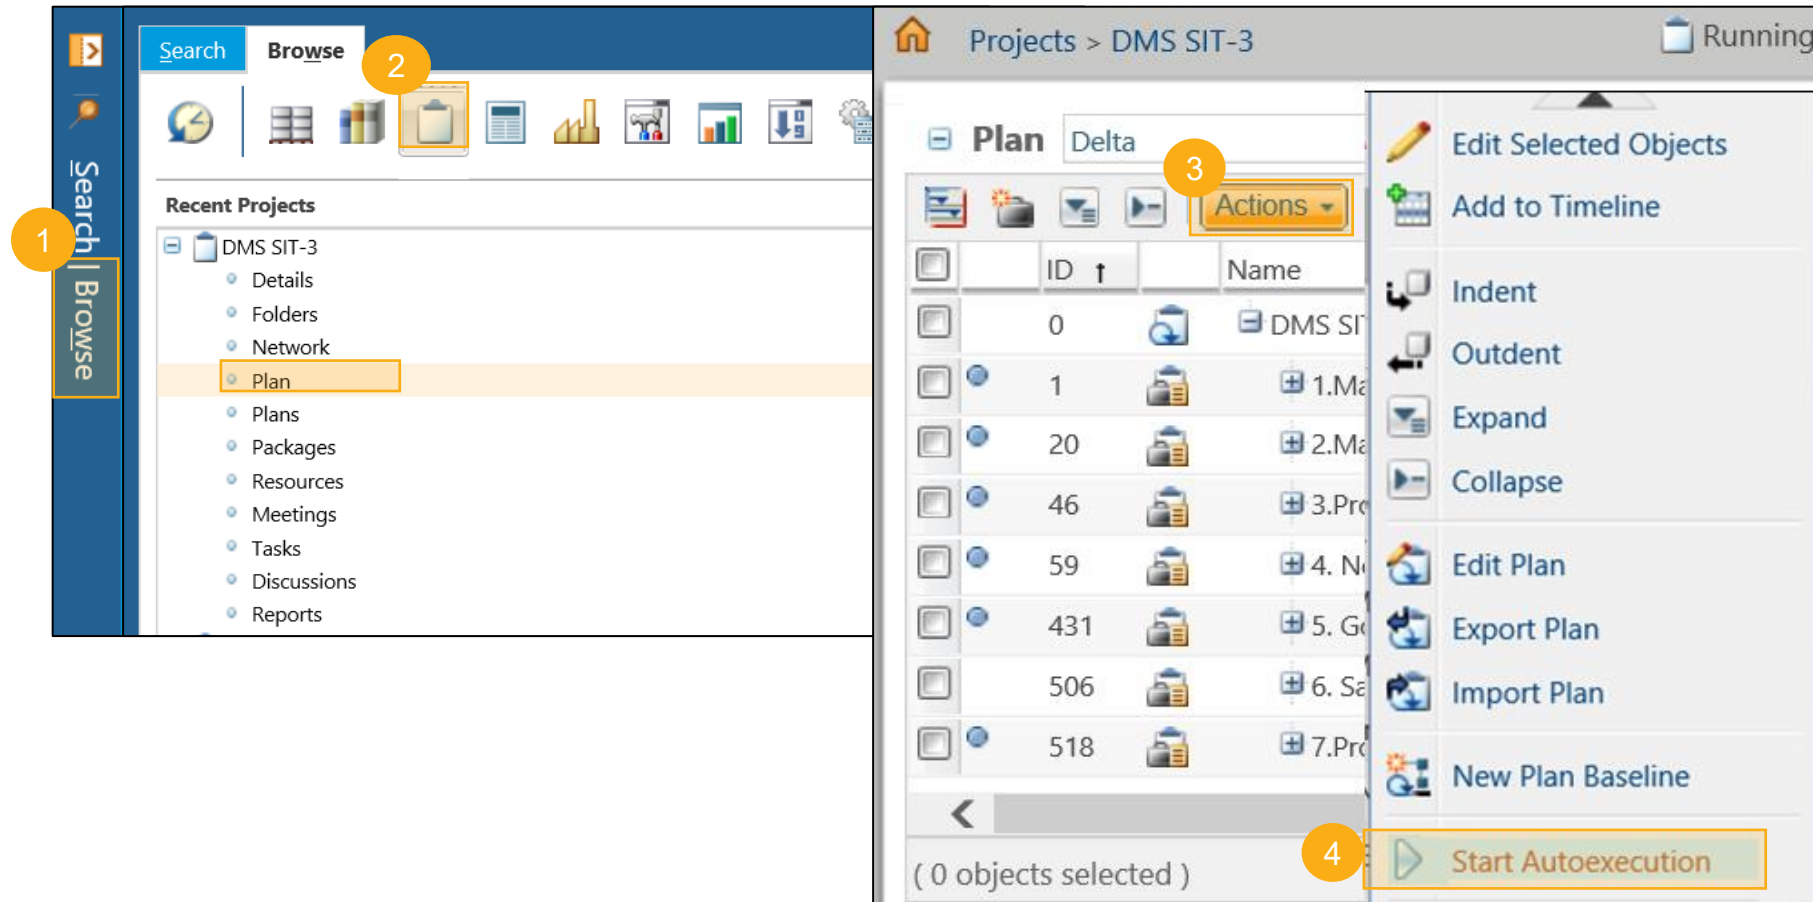

啟動計畫(WBS) -2


- 任務的預計開始時間會自動更新為執行當下的時間
The estimated start time of the task will be automatically updated to the current execution time
- 系統自動寄送相關通知The system automatically sends relevant notifications

系統開始計算各任務的實際開始日
The system starts calculating the actual start date of each task

ID	Name	Estimated Start	Estimated Finish	Actual Start	Actual Finish	Ow
0	DMS SIT-3	9/18/19 11:39 AM	10/09/33 11:39 AM	9/18/19 11:39 AM		
1	1.Market Selection	9/18/19 11:39 AM	12/11/19 11:39 AM	9/18/19 11:39 AM		
2	1-1.Macro & Micro Analysis (Ecosyst...	9/18/19 11:39 AM	10/23/19 11:39 AM	9/18/19 11:39 AM		
3	1-1-1 Macro Environmental Anal...	9/18/19 11:39 AM	10/02/19 11:39 AM	9/18/19 11:39 AM		
4	Industry Trend Analysis	9/18/19 11:39 AM	9/25/19 11:39 AM	9/18/19 11:39 AM		
5	Ecosystem Analysis	9/18/19 11:39 AM	9/25/19 11:39 AM	9/18/19 11:39 AM		
6	Opportunity & Threat Summ...	9/25/19 11:39 AM	10/02/19 11:39 AM			
7	1-1-2 Micro Environmental Analy...	10/02/19 11:39 AM	10/09/19 11:39 AM			
8	Strength & Weakness Analy...	10/02/19 11:39 AM	10/09/19 11:39 AM			
9	1-1-3 Strategic Focus	10/09/19 11:39 AM	10/23/19 11:39 AM			
10	SWOT Analysis	10/09/19 11:39 AM	10/16/19 11:39 AM			

Link to SQMS-DFx

確認該任務系統排程時間，若尚未到該時間，可以對該任務按下右鍵來手動啟動該任務
Check the system schedule of the task. If it is ahead of schedule, right-click on the task to trigger a manual start.

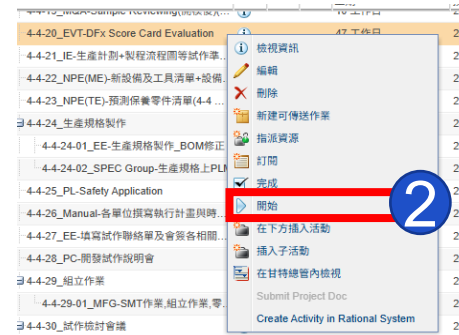

Actions Plan - IT Test 202406 PSBG Component.1

Details Schedule Baselines New Tab 1

Schedule

Schedule Delta

ID	Name	Activity Related ...	Activity Stage	State
1	4_Product Development & Field Test			In Process
2	4-1_Rfq Stage			In Process
3	4-1-01_Design Proposal			In Process
4	4-1-02_Project Kickoff			Scheduled
5	4-1-03_Sample Making			Scheduled
6	4-2_Planning Stage			Scheduled
7	4-2-01_EE Design			Scheduled
8	4-2-02_IE Verification Planning			Scheduled
9	4-2-03_ME Design			Scheduled
10	4-2-04_Specification and BOM			Scheduled
11	4-2-05_C			Scheduled
12	4-2-06_P			Scheduled
13	4-3_EVT Stage			In Process
14	4-3-01_Forma Specification and BOM			Scheduled
15	4-3-02_EVT DFX			In Process
16	4-3-03_Sample Verification			Scheduled
17	4-3-04_DFMEA			In Process

點擊該任務的資訊icon
Click the "info" icon of the task.

Activity - 4-3-02_EVT DFX In Process ?

Details Baselines Related Objects New Tab 1

Attributes | More Attributes

Overdue
Maintain
Date:
Status
Description:

Activity Common Information

Project Name: PJP
Project ID:

Activity Related System: SQMS-DFX

Predecessors:
Gate Number:
Gate Review Id:
Activity Created On: 2024-06-15 20:57 CST
Activity Last Modified: 2024-09-19 13:57 CST

Peripheral System Rational information

點擊該任務的資訊中出現的DFx網址
Click the DFX URL provided in the task information.

Peripheral System SQMS DQA information

Activity Stage: EVT1(EVT)

Dfx Project Link(Cover Page Link): <https://sqms-dqa-qas.deltaww.com/#/ScoreCard/Project/CoverPage/a0775633-0ace-4af5-9236-20b2d5d4e9c4>

DFMEA

SQMS DQA

Organization Project Info

BO: PSBG BU: CNBU Project Code: 24549215933

Participants

Project Manager: JANE LU, JACK CHOU, JESSICA L.T.YANG

Project Lead:

Product Info

Product Application: PSU-IT-Del PSU-IT-General Model: DPS-1400AB-10 A

Project Issue Log

即可開啟該機種的cover page
URL will link to the cover page of the project

5

Stage(Info)	RFQ	Prototype	Concept Design	Detailed Design	EVT1(EVT)	EVT2	DVT
Task Start							2023-12-08 10:43 UTC(+08:00)
Status							InProcess
Duration(Days)							286
Pass Item							334/ 1078= 30.98 %
Failed Item							1/ 1078= 0.09 %
First Score							
Last Score							

Stage Display All Stage

Version

Status

Result

ECN

DVT


1

In Process

FAIL

完成SQMS DQA Dfx Activity-2

- SQMS DQA DFX完成評分且通過後，會即時通知PJM Activity 進行Completed，並自動啟後後續Activity (After SQMS DQA DFX completes the scoring and passes, it will immediately notify the PJM Activity that it is Completed and automatically start the subsequent Activity.)

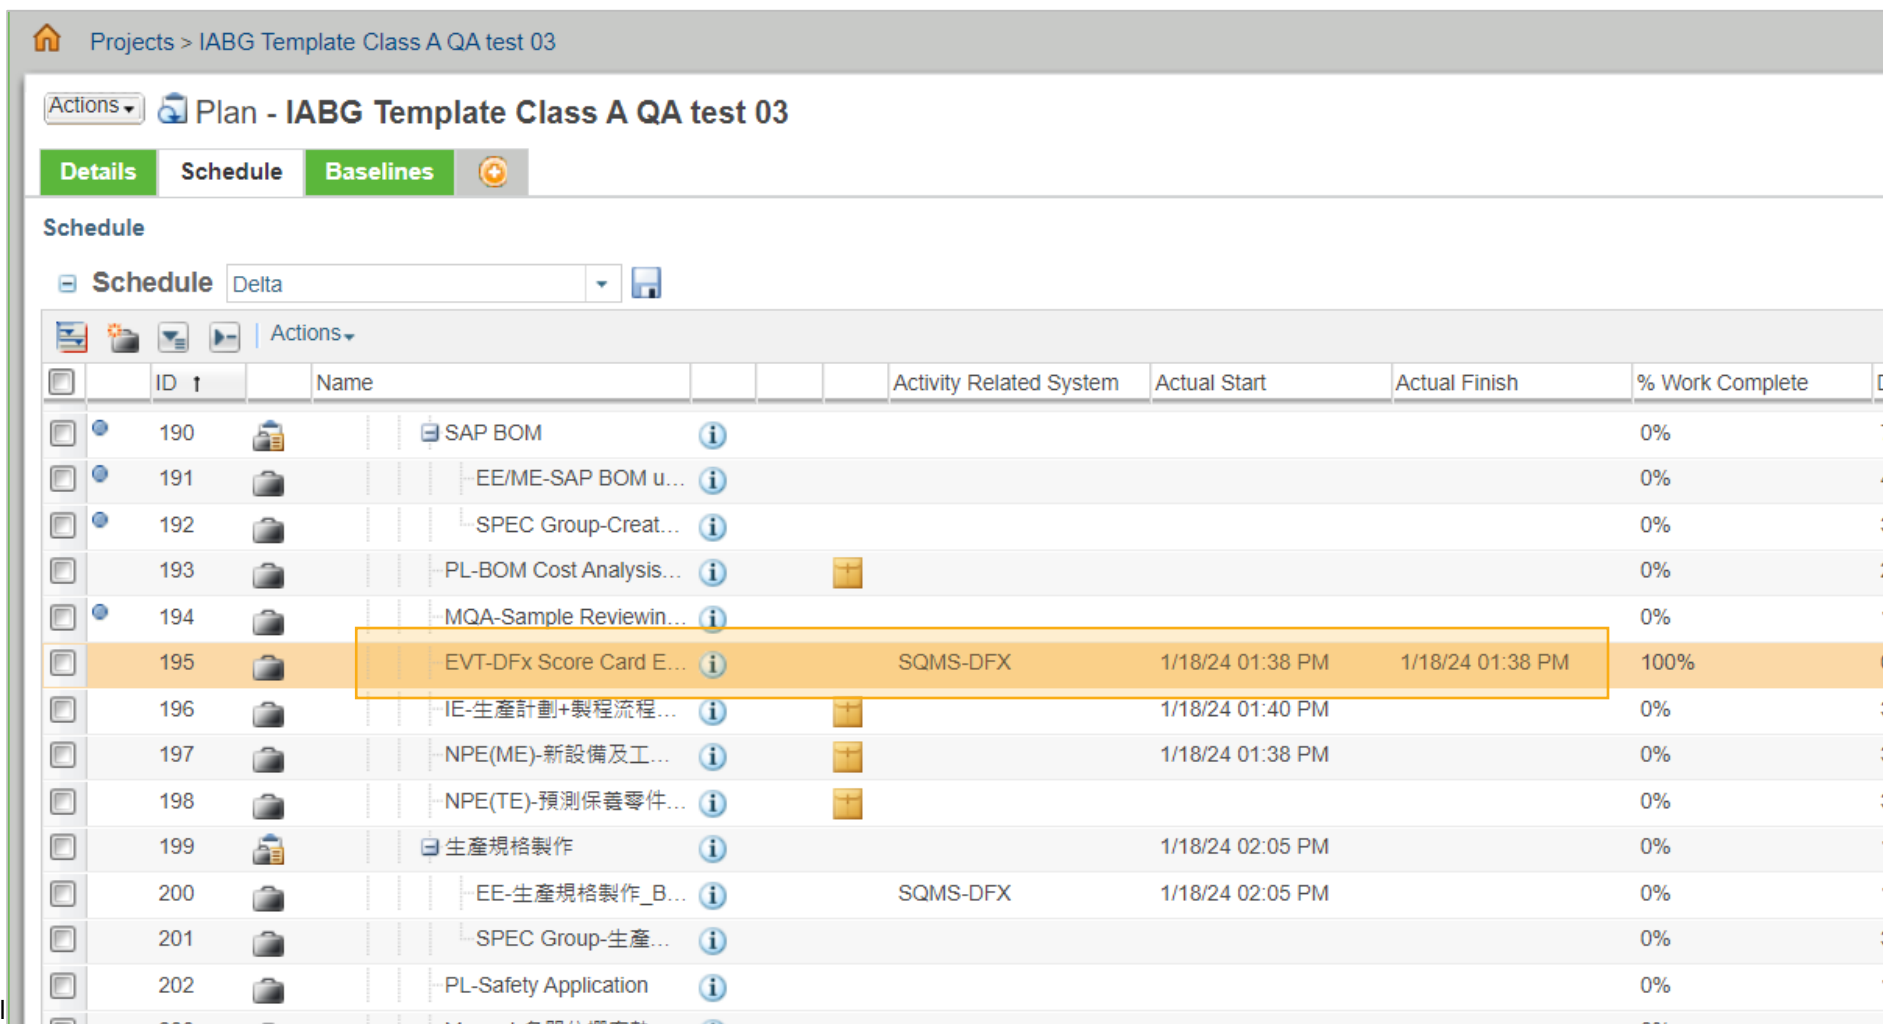

Projects > IABG Template Class A QA test 03

Actions Plan - IABG Template Class A QA test 03

Details Schedule Baselines

Schedule

Schedule Delta

ID	Name	Activity Related System	Actual Start	Actual Finish	% Work Complete	Duration
190	SAP BOM				0%	7 d
191	EE/ME-SAP BOM u...				0%	4 d
192	SPEC Group-Creat...				0%	3 d
193	PL-BOM Cost Analysis...				0%	2 d
194	MQA-Sample Reviewin...				0%	10 d
195	EVT-DFx Score Card E...	SQMS-DFX	1/18/24 01:38 PM	1/18/24 01:38 PM	100%	0 d
196	IE-生產計劃+製程流程...		1/18/24 01:40 PM		0%	30 d
197	NPE(ME)-新設備及工...		1/18/24 01:38 PM		0%	30 d
198	NPE(TE)-預測保養零件...				0%	30 d
199	生產規格製作		1/18/24 02:05 PM		0%	17 d
200	EE-生產規格製作_B...	SQMS-DFX	1/18/24 02:05 PM		0%	14 d
201	SPEC Group-生產...				0%	3 d
202	PL-Safety Application				0%	1 d

2. DFx role settings first

Project Manager/ Leader

DFx Committee/ Owner/ Executor

DQA Homepage > Assign Dfx Owner

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Search

Stage Action	Project Name	Model	BG	BU	Customer	Product Application	Project Manager	Project Lead	Project Code	Stage	Task
	ADP-H001 A	ADP-H001 A	PSBG	MMPBU	Adapter-Industrial-General		AARON.LIN		10088850935	EVT1(EVT)	2312:3

Showing 1 to 1 of 1 entries

Re-Assign Dfx Owner (若PM/ PL設定錯誤人選，原被指定的Dfx Owner可重新選擇)

Re-Assign Dfx Owner (If the PM/ PL is incorrectly assigned, the assigned Dfx Owner can be re-assigned)

Assign Dfx Executor 指定評分者 (選項為當前帳號的下兩階人事組織圖)

Assign Dfx Executor (options are the current account itself and the next two levels of the personnel organization chart)

DQA

Web 3.4.0-alpha_791102e4 Apr 3.3.9-4-g791102e

Assign Dfx Owner

Assign Dfx Executor

PA Working Days

PA BG Setting

Authorized

Archived Old Data

SCORECARD (Dfx)

Project

Work List

Setting

Authorized

Dfx Owner/ Executor

專案會在此清單保留至專案評分完畢 (因應出勤或人員異動的調整需求)

Projects will remain on this list until project scoring is complete (adjusting requirements for attendance or personnel changes)

Copyright © 2022 Delta IT . All Rights Reserved.



DQA Homepage > Project > Assign DFX Owner

Assign Owner

DFa KAI.HSIAO 蕭為凱

InProcess

DFauto All

NoThreshold KAI.HSIAO 蕭為凱

DFb ROBERT.LUO 羅志成

InProcess NI.WAT.W NI.WAT WONGJUK

DFcc THANAKORN.SITT THANAKORN SITTHISORN

InProcess TIM.TSAI 蔡宇祥

DFelec JASON.SC.WANG 王世宗 JESSE.CHENG 鄭富偉

InProcess

DFf MAXWILLION.CHEN 陳哲民 CL.LIU 劉連隆

InProcess

DFm YS.CHUNG 鍾元亨

InProcess

DFms IRIS.WANG 王玉玲

InProcess

DFmt MARTIN.WU 吳振興

InProcess

DFpt HONGCHOU.CHEN 陳鴻洲 DENNIS.HO 何登英 MITCHELL.LIU 劉志鴻 ETHAN.LIU 劉彥宏 YONG.LAI 賴勇 JR.HUA 華家銳 MARTIN.WU 吳振興 ETHAN.KC.LIU 劉冠群 YYONG.XIAO 肖義勇

InProcess

DFq ARTHUR.MD.CHANG 張家維

InProcess

DFr ARTHUR.MD.CHANG 張家維

DFt ARTHUR.MD.CHANG 張家維

InProcess

DFth CHEN 曾士凱

DFx Owner 成員清單選項由 Setting > Role 決定
若無法找到對應的人員，可通知 DFX Owner / DFX Committee 角色，即時修正就會有對應的人選

DFx Owner list is control by Setting > Role Database
If you cannot find right person, please inform DFX Owner or DFX Committee to fix it.



若分數不卡關，則會顯示 No Threshold = 無過關分數要求 (無法進行評分)
發現顯示 No Threshold，可通知 DFX Committee 角色即時修正

If it shows "No Threshold" means this DFX no score control (unable to execute)
Please inform DFX Committee to fix it

專案評分任務完成前，皆可修改成員
Members can be modified until the project scoring task is completed

Authorized PM/ PL

Copyright © 2022 Delta IT. All Rights Reserved.

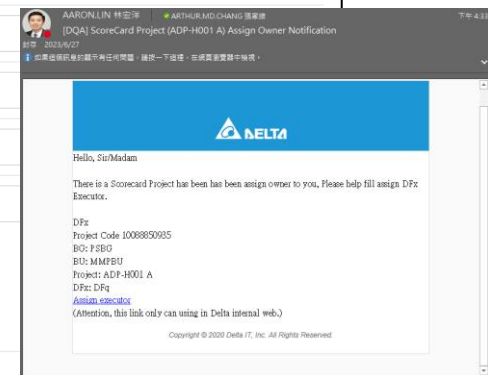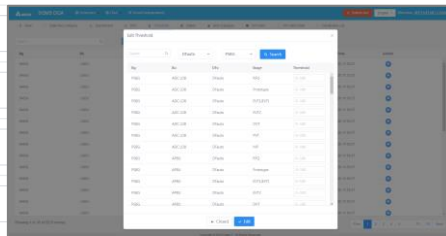

DQA Homepage > Assign DFX Executor

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

Switch User

English

Welcome, ARTHUR.MD.CHANG

Search

Stage Action	Project Name	Model	BG	BU	Customer	Product Application	Project Manager	Project Lead	Project Code	Stage	Task
 	ADP-H001 A	ADP-H001 A	PSBG	MMPBU		Adapter-Industrial-General	AARON.LIN		10088850935	EVT1(EVT)	2312:3

Showing 1 to 1 of 1 entries

Re-Assign DFX Owner (若PM/ PL設定錯誤人選，原被指定的DFX Owner可重新選擇)

Re-Assign DFX Owner (If the PM/ PL is incorrectly assigned, the assigned DFX Owner can be re-assigned)

Assign DFX Executor 指定評分者 (選項為當前帳號的下兩階人事組織圖)

Assign DFX Executor (options are the current account itself and the next two levels of the personnel organization chart)

專案會在此清單保留至專案評分完畢 (因應出勤或人員異動的調整需求)

Projects will remain on this list until project scoring is complete (adjusting requirements for attendance or personnel changes)

Copyright © 2022 Delta IT . All Rights Reserved.

Authorized

DFX Owner/ Executor

DQA Homepage > Assign Dfx Executor

Assign Executor

DFa InProgress	Select	Inprocess Comment	0/100%	☒ InProcess
DFauto InProgress	Select	Inprocess Comment	0/100%	☒ InProcess
DFb InProgress	Select	Inprocess Comment	0/100%	☒ InProcess
DFcc InProgress	Select	Inprocess Comment	0/100%	☒ InProcess
DFce InProgress	Select	Inprocess Comment	0/100%	☒ InProcess
DFelec InProgress	Select	Inprocess Comment	0/100%	☒ InProcess
DFf Ignore	GEORGE.CHENG	N/A, w/o FW	11/100%	☐ Ignore
	Select	Inprocess Comment	0/100%	☒ InProcess

← Closed

Assign Dfx Executor 指定評分者 (選項為當前帳號自己及其下兩階人事組織圖)
Assign Dfx Executor Assign the rater (options are the current account itself and the next two levels of the personnel organization chart)

若**DFx Owner**決定此專案不需要進行該**DFx**評分，填寫原因後可直接關閉評分任務
If the **DFx Owner** decides that this project does not need **DFx** scoring, you can directly close the scoring task after filling in the reason

Authorized

DFx Owner/ Executor

DQA Homepage > Setting

Role

Objective Category

Department

DFx

Threshold

Safety

Item Category

DFx Item

DFx Item Draft

OA Review List

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Role角色權限設定

Role list and role permission

+ Add

BG	BU	DFx	Type	AD Account	Action
PSBG	MMPBU	DFa	OWNER	KAI.HSIAO 蕭為凱 ROBERT.LUO 羅志成 NIWAT.W NIWAT WONGJUK THANAKORN.SITT.THANA	
PSBG	MMPBU	DFauto	OWNER	YS.CHUNG 鍾元亨 SUELLI.LI 李秀利 WORAWIT.WORAWIT WISUTSAWAT PH	
PSBG	MMPBU	DFb	OWNER	SANDY.YR.CHEN 陳怡容	
PSBG	MMPBU				
PSBG	MMPBU				
PSBG	MMPBU				
PSBG	MMPBU				
PSBG	MMPBU				
PSBG	MMPBU	DFm	OWNER	YS.CHUNG 鍾元亨 SUELLI.LI 李秀利 WORAWIT.WORAWIT WISUTSAWAT PH	
PSBG	MMPBU	DFms	OWNER	IRIS.WANG 王玉玲	
		DFmt	OWNER	MARTIN.WU 吳振興	
		DFpt	OWNER	HONGCHOU.CHEN 陳鴻洲 DENNIS.HO 何登英 MITCHELL.LIU 劉志鴻 ETHAN.LIU 劉彥宏 YONG.LAI 賴勇 JR.HUA 華家銳 MARTIN.WU 吳振興 ETHAN.KC.LIU 劉冠群 YIYONG.XIAO 肖義勇	
				FRANCIS FRANCIS CHI-TAI LIU HAYES.ZHANG 張駝 RANGSINEE.CHAI RANGSINEE CHAIKLANG SARUN.L SARUN LASOONGNOEN ARTHUR.MD.CHANG 張家維	

Create Role

Build new role(committee)

Role

BG

BU

DFx

OWNER

DSBU

DSBU

DFauto

Closed

Create

Assign User Role

Adjust members list

Anyone who is already on the list has the authority to add new people to the list.

Role

BG

BU

DFx

OWNER

PSBG

MMPBU

DFa

* If User Not found, please enter full AD Name

KAI.HSIAO 蕭為凱 ROBERT.LUO 羅志成 Niwat.W NIWAT WONGJUK

Thanakorn.Sitt THANAKORN SITTHISORN TIM.TSAI 蔡宇祥

Closed

Assign

Authorized

DFx Owner/ Executor

DFx Committee

permissions	PM/ PL	DFx Owner	DFx Committee
	Read	Read/ Edit	Read/ Edit

3. Start to Scoring

DQA Homepage > Project

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

Return to ARTHUR.MD.CHANG

English

Welcome, NEIL.HH.CHE

Search

Display as Committee or Chairman

Project Action	Stage Action	Project Name	Model	BG	BU	Customer	Product Application	Project Manager	Project Lead	Project Code	Stage	Task ID
		ADP-H001 A	ADP-H001 A	PSBG	MMPBU		Adapter-Industrial-General	AARON.LIN		10088850935	EVT1(EVT)	2329257521 4

Showing 1 to 1 of 1 entries

Scoring 開始評分

Start scoring this project

Select Optional Item 選擇備選條文，可選用並非預設選取的條文到此專案

You can add more optional (not default) DFx items to this project

DQA

Web: 3.4.0-alpha_7f91b2e4 Api: 3.3.9-4-g7f91b2e

Assign DFx Owner

Assign DFx Executor

PA Working Days

PA BG Setting

Authorized

Archived Old Data

SCORECARD (DFx)

Project

Work List

Setting

Authorized

DFx Owner/ Executor

DQA Homepage > Project > Select Optional Item

Organization Project Info

BG: PSBG BU: MMPBU Project Code: 10088850935 Project Name:ADP-H001 A Project Class: A

Participants

Project Manager: AARON LIN Project Lead: DfX Owner: ARTHUR.MD.CHANG DfX Executor: NEIL.HH.CHEN

Product Info

Product Application: Adapter-Industrial-General Stage: EVT1(EVT) Model: ADP-H001 A

DfX Info

DfX: DfQ Threshold: 90 DfX Status: In Process [DfX Issue Log](#)

Selected DfX Items

Remove

All DfX Item

Item No	Item Category	Review Stage	Requirement	AP	Background	Version	Note
A-000004	SN	DVT,EVT1(EVT),EVT2,Prototype,RFQ	生產注意事項必須完整敘述生產相關資訊外, 也須涵蓋下列事項: 1. 需定義出貨包裝的配件內容(例如: 軟體、USB、說明書...等) 2. 機構件的圖面或生產注意事項的敘述需與實物相符合, 且列於bom內(如電	H		1	
A-000005	Packing	DVT,EVT1(EVT),EVT2	1. 產品的輸出線在包裝時不可置放在外殼的label面或有Logo面且產品由紙盒或紙箱拿出時, 輸出線不可露出PE bag外。 2. 產品包裝如有附輸出線材, 輸出線材應建立料號在BOM裡, 產品測試時需搭配此	H		1	
A-000006	Packing	DVT,EVT1(EVT),EVT2	1. 彩盒上需有各功能說明, 以利使用者快速判讀使用 (例如: 開關、插座、指示燈、USB、網路孔、電話線...) 2. 產品需定義彩盒的材質、表面處理方式、黏貼強度等, 且黏貼強度需滿足以下標準:	H		1	
A-000007	Packing	DVT,EVT1(EVT),EVT2	產品需定義彩盒的材質、表面處理方式、黏貼強度等, 且黏貼強度需滿足以下標準: 確認背膠在上、下兩端都必須沾到膠, 且空白處不可大於4mm(只能在盒下方)	H		1	
A-000008	Packing	DVT,EVT1(EVT),EVT2	產品需定義彩盒的材質、表面處理方式、黏貼強度等, 且黏貼強度需滿足以下標準: 背膠寬度須大於8 mm	H		1	
A-000010	TS	DVT,EVT1(EVT),EVT2,Prototype,RFQ	(1). 產品的防塵防水測試, 其條件及結果需符合TS與客人要求等級 (2). 產品規格有要求防水功能, 在EVT2或DVT階段需提供第三方認證單位或內部實驗室之測試報告。 (3). 醫療電源Adapt	H		1	
	Safety	DVT,EVT1(EVT),EVT2	用於機上盒客戶Comcast的機種, 其鋼球撞擊測試是一台產品必需撞六次共6面, 除了安規測試都必須滿足外, 電氣需輸出正常, 塑膠外殼外觀不可以有任何裂痕。 The product for set-to	H		1	
	Safety	DVT,EVT1(EVT),EVT2	須通過落地試驗與鋼球撞擊試驗, 結果判斷必須同時符合安規距離及電氣要求。(參考規範10000-0258) (1). Wall mount機種: 帶鋼球撞擊試驗 (2). Open frame機種:	H		1	
		DVT,EVT2	產品外殼需通過拉力/側向推力測試, EX: 超音波拉力、Wall mount adapter本體與轉接頭拉力、外殼側向推力 等(參考10000-0258及 Bench MS test 測試流程) Pro	H		1	

專案基本資訊

Basic project information

Selected DfX Items 已選用的條文 (深綠底色為預設條文不可修改)

Dark green background is the default clause and cannot be modified)

Authorized

DfX Owner/ Executor

DQA Homepage > Project > Select Optional Item

Search

Optional DFX Items

Add

Select Test Item

Optional 可選用的條文 (深綠底色為預設條文不可修改; 白底色可以選擇新增或删除)

The white background color can be added or deleted

	Item No	Item Category	Review Stage	Requirement	AP	Background	Version	Note
☐	A-000001	Connector	DVT,EVT1(EVT),EVT2	For Innergie: 需定義plug的內外徑,長度與Tip轉接頭尺寸,避免不同型態的Tip轉接頭無法插入DC plug。(Innergie產品)	H		1	
☐	A-000002	Connector	DVT,EVT1(EVT),EVT2	For Innergie <65W: 避免漏電流對人體造成危害,初次級側間的 Y 電容選用需滿足以下之條件 需選用220pF(含)以下,若無法滿足電容選材要求,驗證結果需滿足安規判定要求。	H		1	
☐	A-000003	Connector	DVT,EVT1(EVT),EVT2	For Innergie 65W~90W: 避免漏電流對人體造成危害,初次級側間的 Y 電容選用需滿足以下之條件需選用 330pF(含)以下 若無法滿足電容選材要求,驗證結果需滿足安規判定要求。	H		1	
☒	A-000004	SN	DVT,EVT1(EVT),EVT2,Prototype,RFQ	生產注意事項必須完整敘述生產相關資訊外,也須涵蓋下列事項: 1.需定義出貨包裝的配件內容(例如:軟體、USB、說明書...等) 2.機構件的圖面或生產注意事項的敘述需與實物相符合,且列於bom內(如電	H		1	
☒	A-000005	Packing	DVT,EVT1(EVT),EVT2	1.產品的輸出線在包裝時不可置放在外殼的label面或有Logo面且產品由紙盒或紙箱拿出時,輸出線不可露出PE bag外。 2.產品包裝如有附輸出線材,輸出線材應建立料號在BOM裡,產品測試時需指配此	H		1	
☒	A-000006	Packing	DVT,EVT1(EVT),EVT2	1.彩盒上需有各功能說明,以利使用者快速判讀使用(例如:開關,插座,指示燈,USB,網路孔,電話線...) 2.產品需定義彩盒的材質、表面處理方式、黏貼強度等,且黏貼強度需滿足以下標準:	H		1	
☒	A-000007	Packing	DVT,EVT1(EVT),EVT2	產品需定義彩盒的材質、表面處理方式、黏貼強度等,且黏貼強度需滿足以下標準: 確認背膠在上、下兩端都必須沾到膠,且空白處不可大於4mm(只能在盒下方)	H		1	
☒	A-000008	Packing	DVT,EVT1(EVT),EVT2	產品需定義彩盒的材質、表面處理方式、黏貼強度等,且黏貼強度需滿足以下標準:背膠寬度須大於8 mm	H		1	
☐	A-000009	BOM	DVT,EVT1(EVT),EVT2,Prototype,RFQ	贈博電玩產品若需交警局備案者,機種名與料號需管控並製作材料樣品卡。 EV T1 - 確認機種名需帶有"G"; 材料料號必須帶有 "P", 耗材除外(像包材、紅膠、solder、flux、白膠) EVT2	H		1	
☒	A-000010	TS	DVT,EVT1(EVT),EVT2,Prototype,RFQ	(1) 產品的防塵防水測試,其條件及結果需符合TS與客人要求等級 (2). 產品規格有要求防水功能,在EVT2或DVT階段需提供第三方認證單位或內部實驗室之測試報告。(3). 醫療電源Adapt	H		1	
☒	A-000011	Safety	DVT,EVT1(EVT),EVT2	用於機上盒客戶Comcast的機種,其鋼球撞擊測試是一台產品必需撞六次共6面,除了安規測試都必須滿足外, 電氣需輸出正常,塑膠外殼外觀不可以有任何裂痕。 The product for set-to	H		1	
		Safety	DVT,EVT1(EVT),EVT2	須通過落地試驗與鋼球撞擊試驗,結果判斷必須同時符合安規距離及電氣要求。(參考規範10000-0258) (1). Wall mount機種: 需鋼球撞擊試驗 (2). Open frame機種:	H		1	
		Safety	DVT,EVT1(EVT),EVT2	產品外殼需通過拉力/側向推力測試,EX:超音波拉力、Wall mount adapter本體與轉接頭拉力、外殼側向推力等(參考10000-0258及 Bench MS test 測試流程) Pro	H		1	

Authorized

DFx Owner/ Executor

Prev

1

2

3

4

5

Next



DQA Homepage > Work List

 **SQMS DQA**

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Search

點擊後可直接移動到該專案的評分工作 Click to move directly to the scoring work for that project

Status	DFx	BG	BU	BU	Model Name	Stage	ProjectClass	Created Date	DFx Score	DFx Executor	ProjectManager
InProcess	DFq	PSBG	MMPBU	MMPBU	ADP-H001 A	EVT1(EVT)	A	2022-12-29 10:57:44	0		AARON.LIN
InProcess	DFr	PSBG	MMPBU	MMPBU	ADP-H001 A	EVT1(EVT)	A	2022-12-29 10:57:44	0	ARTHUR.MD.CHANG, JACK.LO	AARON.LIN
InProcess	DFt	PSBG	MMPBU	MMPBU	ADP-H001 A	EVT1(EVT)	A	2022-12-29 10:57:45	0	ARTHUR.MD.CHANG, JACK.LO	AARON.LIN

Showing 1 to 3 of 3 entries

評分未完成(全部條文打完) = In Process ; 評分已完成分數未達標 = Open ; 評分完成且分數達標 = Finish
Not submit all items = In Process; all items submit but not pass = Open; all items submit and pass = Finish

DQA

Web: 3.4.0-alpha_7f91b2e4 Api: 3.3.9-4-g7f91b2e

Assign DFX Owner

Assign DFX Executor

PA Working Days

PA BG Setting

Authorized

Archived Old Data

SCORECARD (DFx)

Project

Work List

Setting

Copyright © 2022 Delta IT . All Rights Reserved.

Authorized

DFx Owner/ Executor

DQA Homepage > Work List > Scoring

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Organization Project Info

BG: PSBG BU: MMPBU Project Code: 10088850935 Project Name:ADP-H001 A Project Class: A

Participants

Project Manager: AARON.LIN Project Lead: DfX Owner: ARTHUR.MD.CHANG DfX Executor: ARTHUR.MD.CHANG JACK.LO

Product Info

Product Application: Adapter-Industrial-General Stage: EVT1(EVT) Model: ADP-H001 A

DfX Info

DfX: DfX Threshold: 90 DfX Status: In Process DfX Issue Log

Product Reversion: ECN: Version: 1

RFQ Prototype EVT1(EVT) EVT2 DVT PVT MP

InProcess

模糊搜尋以下資訊
Fuzzy search for the following information

Search + Save Submit Table Item Size: 50

ItemNo ItemCat Requirement AP Background Measure Value Compliance Points Scoring Note Upload File Toolkit / References Issue Status

A-000001 Specification 產品送入前需檢驗 : (before sample verification) 1. 產品送樣驗證前, 需將客戶規格上傳至PTC或PLM系統給驗證單位確認 (包含產品規格及客戶通用規格) . B 1. 材料的限制(包含禁用料)必需依據客戶及台達要求. (包含DC cable及module上的零件) Material is restricted should follow customer requirement. 產品送入前需檢驗 : (before sample verification) 1. 產品送樣驗證前, 需將客戶規格上傳至PTC或PLM系統給驗證單位確認 (包含產品規格及客戶通用規格) . B 1. 材料的限制(包含禁用料)必需依據客戶及台達要求. (包含DC cable及module上的零件) Material is restricted should follow customer requirement. 產品送入前需檢驗 : (before sample verification) 1. 產品送樣驗證前, 需將客戶規格上傳至PTC或PLM系統給驗證單位確認 (包含產品規格及客戶通用規格) . B 1. 材料的限制(包含禁用料)必需依據客戶及台達要求. (包含DC cable及module上的零件) Material is restricted should follow customer requirement.

Authorized DfX Owner/ Executor

Copyright © 2022 Delta IT . All Rights Reserved.

此專案此門派的Issue log
Issue log of this project and this DfX

可切換DfX門派，都可以檢視其他DfX的內容，但若沒有權限無法編輯
You can switch DfX door to view other DfX contents, but cannot edit without permission

模糊搜尋以下資訊
Fuzzy search for the following information

隱藏部分專案細節資訊
Hide some project details

46 Delta Confidential

DELTA

DQA Homepage > Work List > Scoring

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Organization Project Info

BG: PSBG

BU: MMPBU

Project Code: 10088850935

Project Name:ADP-H001 A

Project Class: A

Participants

Project Manager:
AARON.LIN

Project Lead:

DFx Owner:
ARTHUR.MD.CHANG

DFx Executor:
ARTHUR.MD.CHANG
JACK.LO

Product Info

Product Application: Adapter-Industrial-General

Stage: EVT1(EVT)

Model: ADP-H001 A

DFx Info

DFx: DFr

Threshold: 90

DFx Status: In Process

DFx Issue Log

Product Reversion: ECN: Version: 1

RFQ

Prototype

EVT1(EVT)

EVT2

DVT

PVT

MP

InProcess

Result	Total	Pass	Failed
	73	0	0
FAIL	0%	0/73 = 0%	0/73 = 0%

Search

+ Save

Submit

Table Item Size: 50

ItemNo	ItemCat	Requirement	AP	Background	Measure Value	Compliance Points	Scoring Note	Upload File	Toolkit / References	Issue Status	Se
A-000001	Specification	產品送入前需檢驗：(before sample verification) 1. 產品送樣驗證前，需將客戶規格上傳至PTC或PLM系統給驗證單位確認 (包含產品規格及客戶通用規格) . B	H		Select	Select	0/250	Upload			
		1. 材料的限制(包含禁用料)必需依據客戶及台達要求. (包含DC cable及module上的零件) Material is restricted should follow customer	H		Select	Select	0/250	Upload			
		on Film / Metal Film resistors, 且必須使	M		Select	Select	0/250	Upload			

Copyright © 2022 Delta IT . All Rights Reserved.

儲存評分進度 (若有Fail項目可開立issue)

Save scoring progress (issue can be opened if there are Fail items)

送出最終評分結果 (所有條文接完成評分)

Send out the final score results (all clauses will be graded)

設定一頁顯示的條文數

Set the number of articles to be displayed on a page

Authorized

DFx Owner/ Executor

DQA Homepage > Work List > Scoring

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

90

Product Reversion: ECN: Version: 1

RFQ

Prototype

EVT1(EVT)

EVT2

DVT

PVT

MP

InProcess

Result	Total	Pass	Failed
	73	0	0
FAIL	0%	0/73 = 0%	0/73 = 0%

Search

+ Save

Submit

Table Item Size: 100

ItemNo	ItemCat	Requirement	AP	Background	Measure Value	Compliance Points	Scoring Note	Upload File	Toolkit / References	Issue Status
A-000004	Environment	符合以下條件之一者,需執行產品包裝震動與落下試驗,並需定義在TS規格中。 Meet one of following criteria, it should be done the packaging	M		Select	Select	0/250	Upload		
A-000005	Noise	1.噪音(風扇,蜂鳴器,變壓器聲音...等等) 測試結果必須符合客戶規格及 Delta 規格 10000-0258, 並需確認樣品點膠位置需與 SN 規格一致。 Audible noise(Fan)	M		Select	Select	0/250	Upload		
A-000006	Environment	1. 所有的環境測試條件及結果需符合TS和客戶要求。 All the environment test condition and test result have to meet the	H		Select	Select	0/250	Upload		
		1. HALT 測試程序和結果必須符合客戶或台達要求。 Test procedure and result of HALT shall meet customer demand or Delta demand.			Select	Select	0/250	Upload		
		2. 如果POS 為客戶要求的測試, 產品要能通過POS測試。 If POS test is necessary for customer demand, test result shall be pass.			Select	Select	0/250	Upload		
		3. 加速壽命測試程序和結果必須符合客戶或台達要求。 Test procedure and result of ALT shall meet customer demand or Delta demand.			Select	Select	0/250	Upload		
	S & A	1. HALT 測試程序和結果必須符合客戶或台達要求 Test procedure and result of HALT shall meet customer demand or Delta	H		Select	Select	0/250	Upload		
		2. 若產品有風扇點膠時, (If the product has a fan, the glue point should be defined in the TS specification.)	H		Select	Select	0/250	Upload		
		1. 針對Wall Mount			Select	Select	0/250	Upload		

評分答案/數值
Scoring result

評分備註
Scoring remark

得分與否
Compliance Points

佐證文件
Refer files

完整顯示條文內容
Full display of the provisions

Authorized
DFx Owner/ Executor

DQA Homepage > Work List > Scoring > Open issue

Search

Trigger Issue To Jira * if you can't find a person, please try use full "AD account name"

Action	ItemNo	ItemCat	Requirement	AP	Backgr	Issue Note
+	A-000005	Noise	1.噪音(風扇,蜂鳴器,變壓器異音....等等) 測試結果必須符合客戶規格及 Delta 規格 10000-0258, 並需確認樣品點膠位置需與 SN 規格一致. Audible noise(Fan	M		
+	A-000005	Noise	1.噪音(風扇,蜂鳴器,變壓器異音....等等) 測試結果必須符合客戶規格及 Delta 規格 10000-0258, 並需確認樣品點膠位置需與 SN 規格一致. Audible noise(Fan	M		
+	A-000005	Noise	1.噪音(風扇,蜂鳴器,變壓器異音....等等) 測試結果必須符合客戶規格及 Delta 規格 10000-0258, 並需確認樣品點膠位置需與 SN 規格一致. Audible noise(Fan	M	NO	NO
+	A-000005	Noise	1.噪音(風扇,蜂鳴器,變壓器異音....等等) 測試結果必須符合客戶規格及 Delta 規格 10000-0258, 並需確認樣品點膠位置需與 SN 規格一致. Audible noise(Fan	M	NO	NO

指定Issue Owner
Assign Issue Owner

填寫不良原因
Issue description, Test conditions ,Measured result

← Closed

✓ Submit

評分過程中，只要有一條issue fail，當按下SAVE或是Submit後，就會跳出此視窗來建立issue

During the scoring process, if there is an issue fail, when you press SAVE or Submit, this window will pop up to create an issue

一條條文可對應多條issue
One DFx can open multiple issues

Authorized

DFx Owner/ Executor

DQA Homepage > Work List > Scoring

The screenshot shows the 'Scoring' section of the DQA system. At the top, there is a search bar, an 'Item Category' dropdown, and buttons for '+ Save' and '✓ Submit'. A 'Table Item Size' dropdown is set to 50. Below this is a table with columns: 'Version', 'Measure Value', 'Compliance Points', 'Scoring Note', 'Upload File', and 'Selected Note'. The table is currently empty. To the right of the table, there is a large text area for 'Scoring Note' with a '0' character count and a '250' limit. Below this is an 'Upload' button. A callout box on the right side of the interface provides instructions on how to manage issues.

Issue submit後，從條文的issue status可以看出issue狀態，並且點擊後可以直接連線至jira系統進行issue管理
After submitting an issue, you can see the issue status from the issue status in the clause, and click it to connect directly to the jira system for issue management

Jira Issue:
SQMSISSUE-57266

BETTY.QIU
2025-07-10 14:00
issue open:紅燈(Red)
Issue closed:綠燈(green)

若誤開issue，也可以直接從這裡刪除
If you open an issue by mistake, you can delete it directly from here

Authorized

DFx Owner/ Executor

4. Issue Management

Issue Management

Jira Dev									
Dashboards ▾ Projects ▾ Issues ▾ Boards ▾ Structure ▾ Plans ▾ Calendar ▾ Create									
» Search Save as									
SQMS-ISSUE ▾ DFX Test Failed ▾ Status: All ▾ Assignee: All ▾ Contains text More ▾ Search Advanced									
Project Name: 1013_SQMS_DE... ▾									
Columns ▾									
DFx	Issue 條文	不良現象	對策	H/M/L	狀態	當前處理者			
DFx	DFx Item Requirement	Description	Issue Solution	P	Status	Assignee			
Dfa	插模式的產品(例如Direct Plug-in Adapter)申請歐規GS-Mark時，需要符合EN50075對於歐規插頭滾筒測試的要求 插頭大於100克做500次滾筒測試；小於100克做1000次滾筒測試 做完測試後，不可以有任何零件脫落，或是鬆動；Pin腳不可以變形，要能放得進gauge裡；Pin腳的尺寸要能符合標準的要求。 Wall mount product(ex:Direct Plug-in Adapter) apply EU safety,Need to meet EN50075 tumbling barrel test requirement.Product with out cord mass exceeds100g with 500 times and does not exceeds 100g with 1000 times tumbling barrel test. 1. No part shall have become detached and loosened, 2. Also the AC pins shall not have become so deformed that plug can't be introduced into the gauge, Pin dimension must satisfy specification criteria. 3. The pin shall not turn when a torque of 0.4 Nm is applied.	5	"Solution"	⬆	IN PROGRESS	LIZONG.WEI 韋利聰	...		
Dfa	解決測試fail問題時，需先考量從結構強度方面解決，相關建議如下： 1. choke可增加底座，以增加強度。 2. 將吃錫pad改成梅花型，以增加吃錫面積。 3. 若非有必要，點膠為最後解決方案。 4. IC橫跨初次級側須增加電木PAD或者附近Case長Rib的結構進行強度支撐。 5. 避免在T1下方layout零件，不可避免時必須在T1下方點膠，防止撞擊開裂後零件間打火。 T1設計時可選擇韌性較好的tape如#1388或#1205以增加防破裂強度。 To improve the structure strength for test failure, as below suggestion: 1. choke can add a base to enhance the structure strength. 2. Change pad to star shape, that will increase soldering area. 3. If necessary, the glue process is last solution. 4. IC components cross over Pri. and Sec. side need have bakelite pad or nearby case's rib etc sturcture for strength support. 5. Avoid to layout components underneath X'FMR.Choice the more toughness tape(eg. #1388 or #1205 etc) to enhance tape anti-puncture issue.	4	"Solution"	⬆	DONE	CINDY.YEH 葉偉致			
Dfa	以下條件須通過Packing的Shock・Vibration 測試,(EVT 2 階段測試) 1. 客戶規格已定義須執行包裝Vibration及Drop測試之產品。 2. 產品包裝直接到end-user之產品(ex. 如innergie產品)。 3. 有零件突出產品外型(connector, frame...突出)之產品(ex. 如IPS產品)。 Must pass packing Shock・Vibration test,(EVT 2 Stage test)	3	"Solution"	⬆	DONE	CINDY.YEH 葉偉致			

Issue Management

Jira Software

Dashboards

Projects

Issues

Boards

Structure

Test Management

Calendar

Create

SQMS-ISSUE

Summary

Issues

Reports

Components

Structure

PROJECT SHORTCUTS

Task management ideas

Working in a project

SQMS-ISSUE / SQMSISSUE-316

NBBU-20200803 Project Test-EVT1-B_PSBG_DFdc.000001

Edit

Comment

Assign

More

To Do

Details

Type: DFX Test Failed

Priority: Low

Component/s: DQA

Labels: DFX

Status: DONE (View Workflow)

Resolution: Unresolved

Security Level: Issue Related Personnel Only

Basic

Doc Change

Stage ID: EVT1

BG: PSBG

BU: NBBU

Customer: ASUS

Issue Note: TEST1

Measurement Value: YES

Project Name: 20200803 Project Test

Model Name: ADP-SAMPLE

DFx: DFdc

DFx Item Category: Cost

DFx Item Name: B_PSBG_DFdc.000001

DFx Item Requirement: 此機種是否有零件無系統單價, 需要向統購詢價.
If there is any cost of component need to be maintained by CPC, this issue will not be passed.

Issue Solution: "Solution"

Waive Reason: Arthur.MD.CHANG

Description

None

Attachments

Drop files to attach, or browse.

People

Assignee: ARTHUR.MD.CHANG 張家維

Reporter: SRV-SQMS.ISSUE

SQMS Admin: SRV-SQMS.ISSUE

BU Head: ARTHUR.MD.CHANG 張家維

Issue Owner: ARTHUR.MD.CHANG 張家維

Executor: JACK.LO 羅義然

Executor Manager: ARTHUR.MD.CHANG 張家維

Project Manager: ARTHUR.MD.CHANG 張家維

Team:

Votes: 0 Vote for this issue

Watchers: 1 Start watching this issue

Dates

Issue訊息
不良原因 / 不良條文...etc.
Issue message Reasons for
failure/bad provisions...etc.

角色	描述
Assignee	Issue 階段負責人 Issue Stage leader
Reporter	Issue 發起人(Admin) Issue sponsor
SQMS Admin	專案負責帳號 Account responsible for the project
BU Head	WAIVE第一關同意負責人 WAIVE first level consent person in charge
Issue Owner	Issue 負責人 Issue person in charge
Executor	DFX/Issue 評分人
Executor Manager	WAIVE最後一關同意負責人 WAIVE agrees with the person in charge at the last level

Jira 頁面

#建議使用Edge/Chrome開啟

Jira page#It is recommended to use
Edge/Chrome to open it

53 Delta Confidential

Issue Management

ISSUE狀態(Status) :

Standard process

標準流程


- ◆ Open ----- 被DFx Executor開立後第一個狀態
(The first state after being opened by DFX Executor)
- ◆ In Progress ----- Issue Owner按下START後的狀態
(The status after Issue Owner presses START)
- ◆ In Solution Review ----- Issue Owner送出對策後的狀態
(The status after Issue Owner sends countermeasures)
- ◆ In Change ----- DFX Executor同意對策後的等待變更狀態
(DFX Executor waits for change status after agreeing to countermeasures)
- ◆ In ECN Verify ----- Issue Owner送出ECN單號後的系統驗證狀態
(System verification status after Issue Owner sends ECN order number)
- ◆ In Verify ----- 除ECN以外的變更等待DFX Executor驗證狀態
(Changes other than ECN await DFX Executor verification status)
- ◆ Done ----- DFX Executor於SQMS DQA將該Issue改成PASS後的狀態
(The status after DFX Executor changes the Issue to PASS in SQMS DQA)
- ◆ In Issue Owner Manager review ----- Issue Owner按下Waive的狀態
(The status of Issue Owner pressing Waive)

Waive process


特採

- ◆ In Executor Manager review ----- issue owner manager同意Waive的狀態
(issue owner manager agrees with Waive's status)
- ◆ In BU Head review ----- Executor Manager同意Waive的狀態
(H level item and Executor Manager agrees with Waive's status)
- ◆ Waived ----- executor檢查的狀態
(Executor commend result and submit)
- ◆ Done ----- 完成Waive的狀態
(finish the waive process)

Issue Management- Workflow

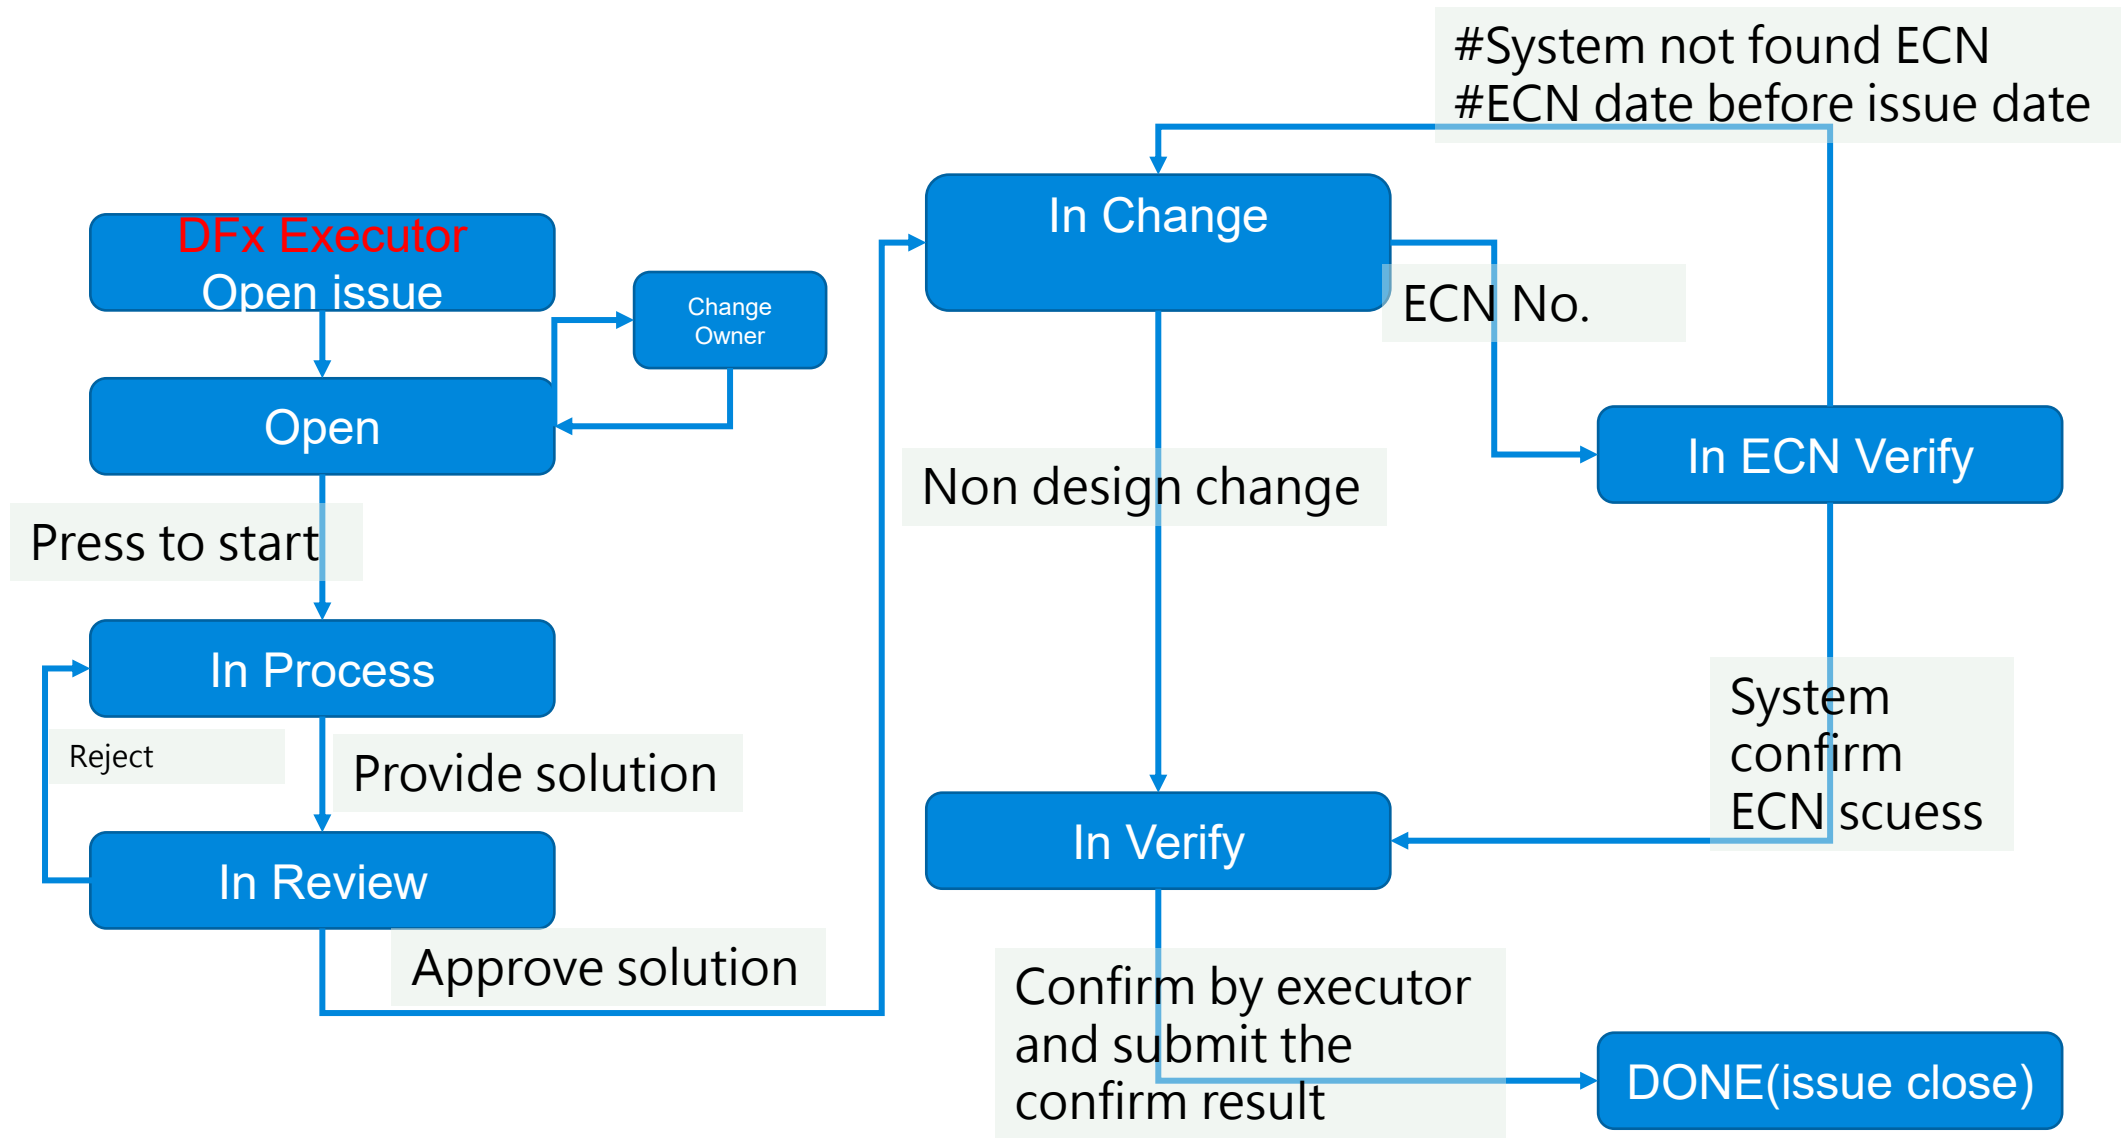

Issue Management-Workflow_Waive

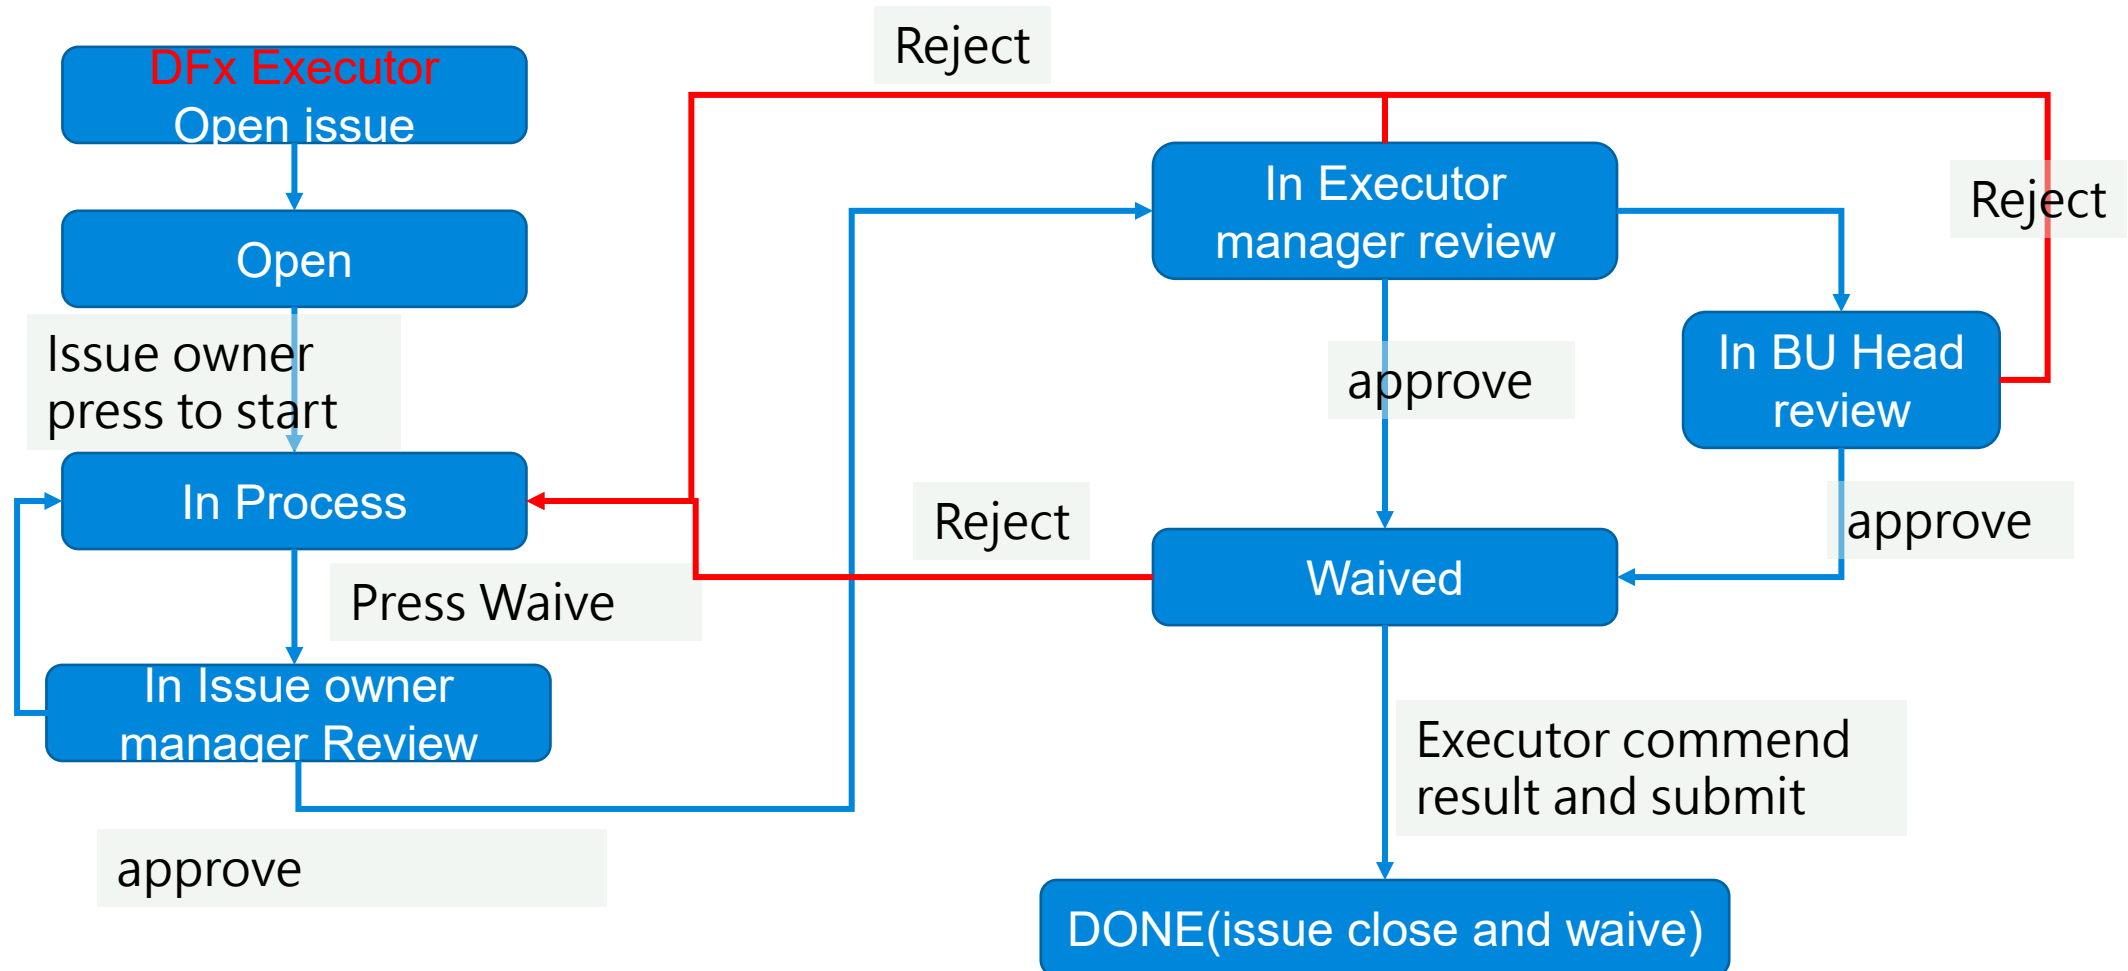

Issue Management

 SQMS-ISSUE / SQMSISSUE-725056

202209027-for_Demo_testmmpbu-EVT1(EVT)1-A-000005

Edit

Add comment

Assign

More

Open

Admin Status → ADMIN STATUS

Change Issue Owner → OPEN

START → IN PROGRESS

View workflow

Model Name List: ModelA,ModelB,ModelC,ModelD,ModelE

DFx: DFa

DFx Item Category: SPEC.

DFx Item Name: A-000005

DFx Item Requirement: 客戶規格外觀確認:
1. 顏色(ex. Pantone No.)及色差值定義.(色差值需明確標示. (DELTA SPEC. $\Delta a < 0.5$, $\Delta b < 0.5$, $\Delta E < 0.9$))
2. 印刷需確認色號/字型/位置定義.

Step1 Press IN PROGRESS start to process

 SQMS-ISSUE / SQMSISSUE-725056

202209027-for_Demo_testmmpbu-EVT1(EVT)1-A-000005

Edit

Add comment

Assign

More

In Progress

Model Name List: ModelA,ModelB,ModelC,ModelD,ModelE

DFx: DFa

DFx Item Category: SPEC.

DFx Item Name: A-000005

DFx Item Requirement: 客戶規格外觀確認:
1. 顏色(ex. Pantone No.)及色差值定義.(色差值需明確標示. (DELTA SPEC. $\Delta a < 0.5$, $\Delta b < 0.5$, $\Delta E < 0.9$))
2. 印刷需確認色號/字型/位置定義.
3. 產品與系統的相關位置及組裝方式, 包含固定孔位置及配合尺寸.
4. DC power cord線材長度定義基準如下, 客戶規格自有定義除外!

流程操作

TO DO

START

IN PROGRESS

START	
動作描述	確認開始處理Issue
彈窗	無
檢查欄位	無
Email	無
Assignee	Issue Owner
限定操作	Issue Owner/Assignee

#In Progress = Issue Owner處理中



Issue Management

Step2 Press “In Solution Review” to submit solution

The screenshot displays the SQMS-ISSUE interface for issue 202209027-for_Demo. The top section shows the issue details: Type: DFX Test Failed V2, Priority: High, Component/s: DQA, Labels: DFX, Stage ID: EVT1(EVT). The 'In Progress' status is highlighted with a red box. Below this, the 'Solution Submit(Solution)' button is highlighted with a red box and a green arrow pointing to the 'IN SOLUTION REVIEW' button. The bottom section shows the 'IN SOLUTION REVIEW' status, with a red box around the 'IN SOLUTION REVIEW' button and a green arrow pointing to it. The 'Details' section on the right shows Resolution: Unresolved and Security Level: Issue Related Personnel Or personnel in issue field co this issue).

流程操作

IN PROGRESS

SOLUTION
_SUBMIT

IN REVIEW

SOLUTION SUBMIT	
動作描述	提交解決方案
彈窗	Issue Solution
檢查欄位	Issue Solution
Email	Executor
Assignee	Executor
限定操作	Issue Owner/Assignee

#In Solution Review = 等待DFx Executor確認對策

Issue Management

SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testm

Step1 Press Approve or Reject

IN SOLUTION REVIEW

Admin Status → ADMIN STATUS

Reject → IN PROGRESS

Approve → IN CHANGE

View workflow

personnel in issue field could this issue)

Visual Text Viewable by All Users

Approve Cancel

IN REVIEW

ACCEPT

IN CHANGE

ACCEPT	
動作描述	Executor 同意Solution
彈窗	有
檢查欄位	無
Email	Issue Owner
Assignee	Issue Owner
限定操作	Executor

SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testm

#Approve後變成In Change

In Change

Details

Type: DFX Test Failed V2

Priority: High

Component/s: DQA

Labels: DFX

Stage ID: EVT1(EVT)

Resolution: Unresolved

Security Level: Issue Related Pers
personnel in issue
this issue)

#In Change = 等待Issue Owner變更設計/文件/規格...etc

Issue Management

SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testmmp

Step1 Design Change need to key in ECN No.

Edit
Add comment
Assign
More
In Change

Details
Type: DFX Test Failed V2
Priority: High
Component/s: DQA
Labels: DFX
Stage ID: EVT1(EVT)

Admin → ADMIN STATUS
Design Change → IN CHANGE
Non-Design Change → IN VERIFY
Reject → IN SOLUTION REVIEW
View workflow

DESIGN_CHANGE

Changed ECN NO.

Issue Solution

Step2 key in ECN No.

IN CHANGE

DESIGN_CHANGE

IN ECN VERIFY

SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testmmp

EVT1(EVT)1-A-000005

Edit
Add comment
Assign
More
In Verify

DESING_CHANGE	
動作描述	提交流程文件修改(設計修改)
彈窗	Changed ECN NO./ Issue Solution
檢查欄位	Changed ECN NO.
Email	無
Assignee	無
限定操作	Issue Owner/ Assignee

#In ECN Verify = 等待系統確認ECN是否正確發行

Issue Management



SQMS-ISSUE / SQMSISSUE-725056

202209027-for_Demo_testmmpbu Step1 Press Confirm value 2th

Edit

Add comment

Assign

More

In Verify

Component/s: DQA

Labels: DFX

Stage ID: EVT1(EVT)

BG: PSBG

BU: MMPBU

Customer Name: HP

Admin Status → ADMIN STATUS

Reject → IN CHANGE

Confirm Value 2(In Veri... → IN VERIFY

View workflow

Confirm Value 2(In Veri...)

Re-Measurement* Value-List None

Comment

Style B I U A

Step2 key in measure value
(若本來判斷方式為數值，就要key in 數值，本來是 YES/NO，則key in YES/NO
(If the original judgment method is to judge by value, you need to key in the value. If it is YES/NO, then key in YES/NO))

Confirm value2

DESING_CHANGE	
動作描述	Executor key in final value
彈窗	Re-measurement value
檢查欄位	Measurement value
Email	無
Assignee	無
限定操作	Exrcutor



SQMS-ISSUE / SQMSISSUE-725056

202209027-for_Demo_testmmpbu-EVT1(EVT)1-A-000005

Edit

Add comment

Assign

More

Done

Done

Component/s: DQA

Security Level: Issue Related Pers
personnel in issue
this issue)

Labels: DFX

BG: PSBG
BU: MMPBU

#Confirm value=重新判斷此條文結果

Issue Management

Step2 Press Waive to process waive

SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo mmpbu-EVT1(EVT)1-A-000005

Edit Add comment Assign More In Progress

Details

Type: DFX Test Failed V2

Priority: High

Component/s: DQA

Labels: DFX

Stage ID: EVT1(EVT)

Admin Status → ADMIN STATUS

Solution Submit(Soluti... → IN SOLUTION REVIEW

Waive → IN ISSUE OWNER MANAGER R...

View workflow

流程操作-申請特批

IN PROGRESS

WAIVE

IN MANGER REVIEW

WAIVE	
動作描述	Issue Owner 選擇進行Waive動作
彈窗	Waive Reason/ BU Head
檢查欄位	Waive Reason/ BU Head
Email	BU Head
Assignee	BU Head
限定操作	Issue Owner/Assignee

Step1 key in the waive reason

SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testmmpbu-EVT1(EVT)1

Edit Add comment Assign More In Issue Owner Manager...

Component/s: DQA

Labels: DFX

Stage ID: EVT1(EVT)

Security Level: Issue Related Per personnel in issu this issue)

#IN issue Manager Review 等待issue manager同意特採

Issue Management

 SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testmmpbu-EVT1(EVT)1-A-000005

 Edit  Add comment Assign More ▾ **In Issue Owner Manager...** ▾

Admin Status → **ADMIN STATUS**

Reject → **IN PROGRESS**

Approve → **IN EXECUTOR MANAGER REVI...**

View workflow

Component/s: DQA

Approve

In Issue Owner Manager Comment

Waive Reason Code Cost ▾

Waive Reason 1

Risk Analysis 1

Further Action 1

Approve Cancel

 SQMS-ISSUE / SQMSISSUE-725056
202209027-for_Demo_testmmpbu-EVT1(EVT)1-A-000005

 Edit  Add comment Assign More ▾ **In Executor Manager Re...** ▾

Component/s: DQA

Security Level: Issue Related Personnel in issue this issue

Labels: DFX

Stage ID: EVT1(EVT)

BG: PSBG

流程操作-申請特批

In Issue Manager review

APPROVE	
動作描述	Executor manager 同意特材
彈窗	有
檢查欄位	無
Email	Executor Manager
Assignee	Executor Manager
限定操作	BU Head

Step1 choose Approve or Reject

If Approve then go to Executor Manager

In Executor Manager review

#IN Executor Manager Review 等待Executor Manager同意特採

Issue Management

 [SQMS-ISSUE / SQMSISSUE-725056](#)
202209027-for_Demo_testmm

 Edit  Add comment  Assign  More  In Executor Manager Re... ▾

Component/s: [DQA](#)

Approve To In BU Head Review

BU Head*  

Comment*  Style ▾  B  I  U  A ▾        + ▾

Visual  Text  Viewable by All Users

 Approve To In BU Head Review  Cancel

 [SQMS-ISSUE / SQMSISSUE-725056](#)
202209027-for_Demo_testmm EVT1(EVT)1-A-000005

 Edit  Add comment  Assign  More  In BU Head Review ▾

Component/s: [DOA](#) Security Level: [Issue Related Per](#)

Step1 choose Approve or Reject

流程操作-申請特批

In Executor Manager review

Step2 指定BU Head

Approve then go to BU head

In BU Head review

APPROVE	
動作描述	BU Head 同意特批
彈窗	無
檢查欄位	無
Email	Executor Manager
Assignee	Executor Manager
限定操作	BU Head

APPROVE

#IN BU Head Review 等待BU Head同意特採



SQMS-ISSUE / SQMSISSUE-725056

202209027-for_Demo_testmmpbu-EVT1(EVT)1-A-000005

Issue Management

Edit Add comment Assign More

Component/s: DQA

Labels: DFX

Stage ID: EVT1(EVT)

BG: PSBG

BU: MMPBU

Admin Status → ADMIN STATUS

Approve → WAIVED

Reject → IN PROGRESS

Step1 choose Approve or Reject

流程操作-申請特批

IN Q MANAGER REVIEW

APPROVE

WAIVED

After Approve status turn to WAIVED

APPROVE	
動作描述	Executor Manager 同意特批
彈窗	無
檢查欄位	無
Email	Executor (SC發)
Assignee	Admin(SC中的Executor)
限定操作	Executor Manager

SQMS-ISSUE / SQMSISSUE-133
test

Edit Comment Assign More NOTE_TO_DONE

Details

Type: DFX Test Failed Status: **WAIVED** (View Workflow)

Priority: Medium Resolution: Unresolved

Component/s: DQA Security Level: Issue Related Personnel Only

Labels: DFX

BG: X X

BU: X X

#WAIVED = 等待DFx Executor更改分數

5. About DFx Cover page

DQA Homepage > Project > Cover Page>Refresh

Organization Project Info

BG: PSBG BU: APBU Project Code: 78332327781 Project Name: AP-P780AM A Project Class: A

Participants

Project Manager: SHERRY.WU PY.WEI JUDY.SHIAU
Project Lead: JUDY.SHIAU

Product Info

Product Application: Power Board-Home Appliance- Sony,Power Board-Home Appliance-General Model:

Stage(Info)	RFQ	Prototype	Concept Design
Task Start			
Status			
Duration(Days)			
Pass Item			
Failed Item			
First Score			
Last Score			

Stage Display All Stage

Version

Status

Refresh Project Item

Refresh 專案的DFx item
Refresh this project's Dfx item

Refresh Project

選擇要refresh的stage
Choose the stage

choose Stage

Select

選擇要refresh的DFx門派，
如果都不選就是refresh 整個專案所有門派

choose Dfx

Select the Dfx faction you want to refresh.If you don't select any, it will refresh all Dfx in the entire project.

Select

← Closed ✓ Refresh

After refreshing the project, the score must be resubmitted to reflect the updated score.

Prototype	DVT
	2025-05-27 21:06 UTC(+08:00)
	InProcess
	76

DQA Homepage > Project > Cover Page

 **SQMS DQA**

 FMEA

 Scorecard

 DQA

 ScoreCard(archived)

Return to ARTHUR.MD.CHANG

English

Welcome, AARON.LIN

Organization Project Info

BG: PSBG

BU: MMPBU

Project Code: 10088850935

Project Name:ADP-H001 A

Project Class: A

Participants

Project Manager:
AARON.LIN

Project Lead:

Product Info

Product Application: Adapter-Industrial-General

Model: ADP-H001 A

Project Issue Log

此專案的Issue log
Issue log of this project

Stage(Info)	RFQ	Prototype	EVT1(EVT)	EVT2	DVT	PVT	MP
Task Start			2022-12-29 10:57:44				
Status			InProcess				
Duration(Days)			0				
Pass Item			0/ 1666= 0 %				
Failed Item			0/ 1666= 0 %				
First Score							
Last Score							

> Owner

> Executor

Stage

Display All Stage

EVT1(EVT)

1

In Process

FAIL

Version

Status

Result

ECN

Product Revision

Place of Manufacturing

此專案的DFx Owner/ DFx Executor
DFx Owner/ DFx Executor of this project

DQA Homepage > Project > Cover Page

DELTA

SQMS DQA

FMEA

Scorecard

DQA

ScoreCard(archived)

Return to ARTHUR.MD.CHANG

English

Welcome, AARON.LIN

Last Score

Owner

ME (DFa)

FE (DFf)

QE (DFr)

IE (DFauto)

IE (DFm)

TE (DFt)

Layout (DFb)

Spec (DFms)

Thermal (DFth)

CPC (DFcc)

ME (DFmt)

CE (DFce)

ME (DFpt)

EE (DFelec)

QA (DFq)

ARTHUR.MD.CHANG

DFx Owner/ DFx Executor

DFx Owner/ DFx Executor of this project

PM/ PL can manually send a letter to remind you of the scoring task

PM/ PL 可手動派信提醒評分任務

Executor

ME (DFa)

FE (DFf)

QE (DFr)

IE (DFauto)

IE (DFm)

TE (DFt)

Layout (DFb)

Spec (DFms)

Thermal (DFth)

EE (DFelec)

QA (DFq)

Stage

Display All Stage

EVT1(EVT)

1

In Progress

AARON.LIN 林宏洋

ARTHUR.MD.CHANG 張家維

下午 4:03

[DQA] ScoreCard Project (ADP-H001 A) Assign Owner Notification

新增 2023/6/27

如果此通知顯示有任何問題，請按一下這裡，在網頁瀏覽器中檢視。

DELTA

Hello, Sir/Madam

There is a Scorecard Project has been assign owner to you, Please help fill assign DFx Executor.

DFx
Project Code 1008850935
BG: PSBG
BU: MMPBU
Project: ADP-H001 A
DFx: DFq
[Assign executor](#)
(Attention, this link only can using in Delta internal web.)

Copyright © 2020 Delta IT, Inc. All Rights Reserved.

DQA Homepage > Project > Cover Page

Stage	Display All Stage	EVT1(EVT)
Version	可展開看所有進版評分的歷程	1
Status	Check scoring history	In Process
Result		FAIL
ECN		
Product Revision		
Place of Manufacturing	任何專案成員都可以更新此兩個欄位資訊 Any one in this project can update this two information	
DFa		98.63
DFauto		78.72
DFcc		TODO
DFdc		100
DFelec		TODO
DFf		TODO
DFm		93.15
DFms		100
DFmt		92.86
DFpt		100
DFq		TODO
DFr		TODO
DFsr		TODO
DFt		TODO
DFth		TODO
Comment	任何專案成員都可以更新此備註欄 Anyone in this project can update this "Comment"	

分數欄位狀態(scoring status)

TO DO→尚未進行評分 No scoring yet

TO DO(96)→已評分只SAVE沒有按Submit
Already scoring, but only saved it
and didn't Submit

96→已完成評分Already scoring and submit

96(comment:...)→Comment by Owner

N/A-->Ignore this stage by Owner

Expired on xxxx/xx/xx→逾期提醒(不影響評分)Overdue reminders(will not affect scoring)

+ Save Product Revision or Place Of Manufacturing

Print PDF

將專案進度資訊轉存PDF (開發中)
Saving project progress Information to PDF (under development)

About DFx Setting

DQA Homepage > Department

The screenshot displays the 'Department' management interface in the SQMS DQA system. The top navigation bar includes the 'Department' tab, which is highlighted. Below the navigation bar, there is a search bar and a '+ Add' button. The main content area shows a table of departments with columns for 'name' and 'Action'. The 'name' column lists departments such as Biochemistry, CE, Cost, CPC, EE, FE, IE, Layout, ME, QA, QE, and Safety. The 'Action' column contains blue square icons and red circular icons. Two pop-up windows are shown: 'Add Department' and 'Update Department'. The 'Add Department' window has a 'Name' field and 'Closed' and 'Create' buttons. The 'Update Department' window has a 'Name' field with the value 'Biochemistry' and 'Closed' and 'Update' buttons. A blue arrow points from the 'Add Department' button to the 'Add Department' pop-up window. Another blue arrow points from the blue square icon in the 'Action' column to the 'Update Department' pop-up window. A yellow box with the text 'Authorized' and a blue box with the text 'DfX Admin' are overlaid on the bottom left. A table at the bottom right shows the roles 'PM/ PL', 'DfX Owner', and 'DfX Committee' with the action 'Read'.

name	Action
Biochemistry	 
CE	 
Cost	 
CPC	 
EE	 
FE	 
IE	 
Layout	 
ME	 
QA	 
QE	 
Safety	 

PM/ PL	DfX Owner	DfX Committee
Read	Read	Read

DQA Homepage > DFX

Scorecard

DQA

ScoreCard(archived)

SwitchUserEnglishWelcome, ARTHUR.MD.CHANG

RoleObjective CategoryDepartmentDFXThresholdSafetyItem CategoryDFx ItemDFx Item DraftOA Review List

Search

+ Add

DFx列表主檔
List of DFX names

DFx	Description	Department	Action
DFa	Design for Assembly	ME	
DFauto	Design for Automation	IE	
DFb	Design for Board Layout	Layout	
DFbio	Design for Biochemistry	Biochemistry	
DFcc	Design for COS/Cost	CPC	
DFce	Design for Component	CE	
DFdc	Design for Design Cost	Cost	
DFdct	Design for Die Casting Tooling Parts	ME	
DFelec	Design for Electrical	EE	
DFf	Design for Firmware	FE	
DFimage	Design for Image	System	
DFm	Design for Manufacturing	IE	
	Design for Multiple Source	Spec	
	Design for Metal Tooling Parts	ME	

Update DFX

Name:

DFa3/50

Description:

Design for Assembly19/50

Department:

ME

Closed

Update

Authorized

DFx Admin

PM/ PL	DFx Owner	DFx Committee
Read	Read	Read

DQA Homepage > Threshold

DFx適用BU及其過關分數設定
DFx use for which BU and how much score can pass setting

Bg	Bu	DFx	Stage	Threshold	Modified Time	Action
BABG	LSBU	DFb	DVT	90	2021-10-28 11:39:27	
BABG	LSBU	DFcc	DVT	80		
BABG	LSBU	DFce	DVT	95		
BABG	LSBU	DFq	DVT	85		
BABG	LSBU	DFr	DVT			
BABG	LSBU	DFsr	DVT	85		
BABG	LSBU	DFb	EVT1(EVT)	95		
BABG	LSBU	DFcc	EVT1(EVT)	95		
BABG	LSBU	DFce	EVT1(EVT)	95		
BABG	LSBU	DFq	EVT1(EVT)	95		
BABG	LSBU	DFr	EVT1(EVT)			
BABG	LSBU	DFsr	EVT1(EVT)	95		
	LSBU	DFb	EVT2	95		
	LSBU	DFcc	EVT2	95		

Edit Threshold

Search

DFa

PSBG

Search

Bg	Bu	DFx	Stage	Threshold
PSBG	CDBU	DFa	Concept Design	0~100
PSBG	CNBU	DFa	RFQ	90
PSBG	CNBU	DFa	Prototype	90
PSBG	CNBU	DFa	EVT1(EVT)	90
PSBG	CNBU	DFa	EVT2	95
PSBG	CNBU	DFa	DVT	95
PSBG	CNBU	DFa	PVT	95
PSBG	CNBU	DFa	MP	0~100
PSBG	CNBU	DFa	Concept Design	0~100
PSBG	DCBU	DFa	RFQ	95
PSBG	DCBU	DFa	Prototype	95

Closed

Edit

Authorized
DFx Committee

PM/ PL	DFx Owner	DFx Committee
Read	Read	Read/Edit

DQA Homepage > Safety

DELTA

SQMS DQA

FMEA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Role

Objective Category

Department

DFx

Threshold

Safety

Item Category

DFx Item

DFx Item Draft

OA Review List

Search

+ Add

安規依據法條設定
Safety rules are set according to the law

Safety	Create Time	Modified Time	Action
ABYC A-20	2021-10-28 11:39:21	2021-10-28 11:39:21	
BQB	2021-10-28 11:39:21		
CEC Title 24	2021-10-28 11:39:21		
CISPR15/EN 55015	2021-10-28 11:39:21		
CISPR32/EN 55032	2021-10-28 11:39:21		
CISPR35/EN 55035	2021-10-28 11:39:21		
CNS 14115	2021-10-28 11:39:21		
CNS 14335	2021-10-28 11:39:21	2021-10-28 11:39:21	
CNS 14336-1	2021-10-28 11:39:21	2021-10-28 11:39:21	
CNS 15233	2021-10-28 11:39:21	2021-10-28 11:39:21	
CNS13781-1:102	2021-10-28 11:39:21	2021-10-28 11:39:21	
CNS15663:102	2021-10-28 11:39:21	2021-10-28 11:39:21	
	2021-10-28 11:39:21	2021-10-28 11:39:21	
	2021-10-28 11:39:21	2021-10-28 11:39:21	

Update Safety

* Name:

ABYC A-20

9/50

BG/BU:

IABG / AMBU

IABG / IABG HQ

IABG / IMSBU

IABG / MDSBU

IABG / PLCBU

IABG / SSM LOB

IABG / SSMDB

Closed

Update

Authorized

DFx Committee

PM/ PL

DFx Owner

DFx Committee

Read

Read

Read/Edit (DFsr)

Prev

1

2

3

4

5

Next



DQA Homepage > Item Category

DELTA

SQMS DQA

FMEA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Role

Objective Category

Department

DFx

Threshold

Safety

Item Category

DFx Item

DFx Item Draft

OA Review List

DFx: DFa

Item Cate L1: Document

Item Cate L2: Document

Item Cate L3: Pick a Item Cat...

Add

Item Cate. L1/ L2/ L3為三階層的分類，可各自選擇後按下Add加入DFx中

Item Cate which can be selected by pressing Add to DFx

每個DFx自己內部的分類

Each DFx has its own internal classification

Item Category L1	Item Category L2	Item Category L3	Action
Document	Document	Document Check	
Document	Document	other	
Document	Document	Regulations	
Mechanical	Mechanical	Cable	
Mechanical	Mechanical	Connector	
Mechanical	Mechanical	Contact Spring, Clip	
Mechanical	Mechanical	Fan	
Mechanical	Mechanical	Frame	
Mechanical	Mechanical	Gear	
Mechanical	Mechanical	HSK	
Mechanical	Mechanical	Insulator	
Mechanical	Mechanical	Label	
Mechanical	Mechanical	Machining parts	

Authorized

DFx Admin

PM/ PL

DFx Owner

DFx Committee

Prev

1

2

3

4

Next

76 Delta Confidential

DQA Homepage > DFx Item

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Role

Objective Category

Department

DFx

Threshold

Safety

Item Category

DFx Item

DFx Item Draft

QA Review List

BG: Pick BG

Stage: Pick Stage

Product Application: Please select BG First

Search

DFx: DFa

Status: ALL

Time: Last start Update

Last end Update

Delete

Action	Item No	Item Category	Requirement	Create Time	Last Updated	Status	Version
	A-000001	SPEC.	Shock & Vibration 以及drop or Acoustic noise(若無客戶drop and noise 規格時, 參考10000-0258) 客戶規格是否定義清楚?且需通過測	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	
	A-000002	Material	若為 Whitebox(OEM) 機種, 客戶BOM 表資料是否完整 包括零件之料號 與設計件之圖面. If whitebox project, make sure AVL is clear for a	ARTHUR.MD.CHANG	ARTHUR.MD.CHANG	AVAILABLE	
	A-000003	Material	所有機構零件的設計/選用, 需先依照10000-1030要求, 確認 重部品; 當該零件為安置部品時, 需在規格中將安置尺寸前方增加 列為重要尺寸管控. Befor				
	A-000004	NUDD	1. 確認新材料/新零件的相關特性及參數是否符合設計應用 過設計應用測試. 2. 如選用材料的作業方式與一般適用狀況不同, 應用方式定義在SN中管控. Check new mate				
	A-000005	SPEC.	客戶規格外觀確認: 1. 顏色(ex. Pantone No.)及色差值定義. 確標示. (DELTA SPEC. $\Delta a < 0.5$, $\Delta b < 0.5$, $\Delta E < 0.9$) 2. 印刷需確認色				
	A-000006	Material	設計應考慮無鉛波焊或 Reflow 製程後, 功能性機構件不能有熔損或變形. 其它如定位功能不在此限制, Reflow的環境130+30度, 150~180s 波焊的環境2 55+5度, 3~5秒 (2012	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	
	A-000007	Socket	當 SOCKET 外觀面非為enclosure時, 而被其他COVER所涵蓋時, 需參照I EC 320的標準 AC CONNECTOR做3D組件的確認(AC CONNECTOR頂面須能 接觸到SOCKET底面	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	
	A-000008	Material	零件與零件的尺寸公差必須在3D軟體確認碰撞搭配的合理性, 避免worst 情況下產生干涉問題(除干涉的設計外). Check the dimension tolerances betwe en part	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	
			機殼內耳掛或螺柱或Standoff高度, 在扣除絕緣片之厚度, 小板與大板的 零件線腳應有足夠之空間, 如備註所示, 以避免組立後因空間不足所造成之應力 於零件線腳及PWB上, 長期易造成線腳刺破絕緣片及電氣不良。	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	
			客戶系統的固定孔位置與螺紋種類與長度必須與客戶確認, 且系統孔周圍 (螺絲長度+5 和 螺絲外徑+5) mm 之範圍內不可有任何零件侵入,尤其是線材. 但二次測元件若符合SELV與LCC線路架構,改以	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	
		Matel Case	零件鬆脫 1) 須確保外部機構結構不會因鬆脫而落入機殼內部。 (不可使 用有可能因鬆脫而落入機殼內部之零件) 2) 避免使用這類組合元件於機殼, 或提供另一方法確保這類元件不會因鬆脫落入機殼內部。 3)	ARTHUR.MD.CHANG 2021-10-28 11:39:24	ARTHUR.MD.CHANG 2021-10-28 11:39:24	AVAILABLE	

Showing 1 to 30 of 1738 entries

PM/ PL

DFx Owner

DFx Committee

Read

Read/Edit

Read/Edit

Prev

1

2

3

4

5

...

57

58

Next

條文要求資料庫

DFx requirement database

可透過BG+ Stage+ PA檢查條文狀態及數量

亦可模糊搜尋/ 時間區段搜尋變更/ Status可查核變更狀態

BG+ Stage+ PA can be used to check the condition and quantity of pro

Fuzzy search/time segment search change/Status can also be used to

the change status

Authorized

Owner/ Executor

Committee

DQA Homepage > DFX Item Draft

DELTA

SQMS DQA

FMEA

Scorecard

DQA

ScoreCard(archived)

Switch User

English

Welcome, ARTHUR.MD.CHANG

Role

Objective Category

Department

DFx

Threshold

Safety

Item Category

DFx Item

DFx Item Draft

OA Review List

Search

DFx: DfA

Approve

Add

Import Excel

Delete

Item No

Item Category

Requirement

Create Time

Status

OA Status

Action

A-000004

NUDD

1. 確認新材料/新零件的相關特性及參數是否符合設計應用需求, 並須通過設計應用測試. 2. 如選用材料的作業方式與一般通用狀況不同, 需依照實際應用方式定義在SN中管控. Check new materials/new component related characteristics and parameters, whether can meet design application requirements or not, it also need to be passed the application test by design.

2022-12-14 14:49:50

DELETE

INIT

A-000005

SPEC.

1 1

2022-12-22 17:03:48

MODIFY

INIT

A-000008

Tape

Demo IF Test Demo IF Test Demo IF Test

2022-12-16 10:46:41

MODIFY

INIT

A-000009

Tape

Demo IF Test Demo IF Test Demo IF Test

2022-12-16 10:46:41

MODIFY

INIT

A-000010

Matel Case

客戶系統的固定孔位置與螺紋種類與長度必須與客戶確認,且系統孔周圍 (螺絲長度+5 and 螺絲外徑+5) mm 之範圍內不可有任何零件侵入,尤其是線材.但二次測元件若符合SELV與LCC線路架構,改以(螺絲長度+2 and 螺絲外徑+2)判斷之. The mounting hole, screw type & length for system should get confirmation from customer, and there shouldn't have any components on the area (screw length+5 and screw diameter+5) mm refer to the system screw. If second side componets meet SELV & LCC circuit, it change to be judged distance by (screw length+2 and screw diameter+2).

2022-12-16 10:46:41

DELETE

INIT

A-000011

Matel Case

零件鬆脫 1) 須確保外部機構結構不會因鬆脫而落入機殼內部。 (不可使用有可能因鬆脫而落入機殼內部之零件) 2) 避免使用這類組合元件於機殼, 或提供另一方法確保這類元件不會因鬆脫落入機殼內部。 3) 機械卡栓不能因鎖釘破壞而鬆脫落入機殼內部。 4)Latch button 不能有鬆脫的現象. 5)EMI 彈片:EMI I彈片著裝必須是牢靠的, 機械式的成型是最好的. 用膠貼附 (諸如泡棉) 的設計, 在重複搬動時並不可靠。 Loose parts: 1) Ensure that external mechanical structures cannot come loose inside the chassis. (Parts which can potentially come loose inside the PSU chassis must not be used.) 2) Avoid using these type of parts by integrating their function into the chassis, OR, provide a secondary method to ensure that these parts CANNOT come loose inside the PSU. 3) a mechanical latch CANNOT come loose inside PSU due to broken rivets.

2022-12-16 10:46:41

DELETE

INIT

A-001631

Tape

Demo IF Test Demo THEN Test Demo ELSE Test

2022-12-14 14:49:50

ADD

INIT

A-001632

Tape

Demo IF Test Demo THEN Test Demo ELSE Test

2022-12-14 14:49:50

ADD

INIT

Demo IF Test Demo IF Test Demo IF Test

2022-12-16 10:46:40

ADD

INIT

Demo IF Test Demo IF Test Demo IF Test

2022-12-16 10:46:40

ADD

INIT

2022-12-22 11:12:37

ADD

INIT

刪除未核准的變更申請
Delete unapproved change requests

送出未核准的變更OA申請
Send unapproved OA change request

使用Excel格式批量新增條文
Add DfX in bulk in Excel format

逐條新增條文
Add DfX one by one

Authorized

DFx Owner/ Executor

DFx Committee

PM/ PL

DFx Owner

DFx Committee

Read

Read/Edit

Read/Edit



DQA Homepage > DFx Item Draft

DELTA

SQMS DQA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHAN

Role

Objective Category

Department

DFx

Threshold

Safety

Item Category

DFx Item

DFx Item Draft

OA Review List

BG: Pick BG

Stage: Pick Stage

Product Application: Please select BG First

Search

DFx: DFa

Send To QA Review

+ Add

+ Import Excel

Delete

Action	Item No	Item Category	Requirement	Create Time	Status	OAStatus
☐	A-000002	Material	若為 Whitebox(OEM) 機種 客戶BOM 表資料是否完整 包括零件之料號與設計件之圖面	ARTHUR.MD.CHANG 2023-01-31 15:15:56	MODIFY	INIT

Showing 1 to 1 of 1 entries

送出未核准的變更OA申請
Send unapproved OA change request

刪除未核准的變更申請
Delete unapproved change requests

使用Excel格式批量新增條文 (建議大量新增時使用)
Add DFx in bulk in Excel format

逐條新增條文
Add DFx one by one

Authorized

DFx Owner/ Executor

DFx Committee

PM/ PL	DFx Owner	DFx Committee
Read	Read/Edit	Read/Edit



Relocation_Setting→Role

Authorized Roles: BG Window / Committee

1 Click 'Role' in the sidebar.

2 Click 'Relocation Role' button.

3 Select the original BG.

4 Select the BG to transfer to.

5 Select the BU to transfer to.

6 If no change, you can choose ignore.

7 click icon "Relocation".

BG	BU	DFx	Type	AD Account
		DFa	CHAIRMAN	AILEEN.HSU 徐惠珍
	ABCD	CHAIRMAN		BETTY.QIU 邱翊菁
		DFsr	CHAIRMAN	BETTY.QIU 邱翊菁
		DFauto	CHAIRMAN	BETTY.QIU 邱翊菁
		DFb	CHAIRMAN	BETTY.QIU 邱翊菁
	EASON_DFX	CHAIRMAN		BETTY.QIU 邱翊菁
		CORP		EVA.MYHUANG 黃
		DFr	CHAIRMAN	BETTY.QIU 邱翊菁
BABG			BGWINDOW	
BABG			BGQMANAGER	ARES.CHEN 陳盈潔
BABG	BASBU	DFb	OWNER	BETTY.QIU 邱翊菁
BABG	ABCD	COMMITTEE		JERRY.JK.CHANG 張峻綱

Relocation_Setting→Threshold

Authorized Roles: BG Window / Committee

1

2

3 Select the original BG

4 Select the BG to transfer to.

5 Select the BU to transfer to.

6 If no change, you can choose ignore

7 click icon "Relocation"

Bg	Bu	DFx	Stage
BABG	LSBU	DFb	DVT
BABG	LSBU	DFr	DVT
BABG	LSBU	DFsr	DVT
BABG	LSBU	DFb	EVT1(EVT)
BABG	LSBU	DFr	EVT1(EVT)
BABG	LSBU	DFsr	EVT1(EVT)
BABG	LSBU	DFb	EVT2
BABG	LSBU	DFr	EVT2
BABG	LSBU	DFsr	EVT2
BABG	LSBU	DFb	Prototype
BABG	LSBU	DFr	Prototype
BABG	LSBU	DFb	PVT
BABG	LSBU	DFr	PVT

Relocation Role

Please choose the BG to copy

old BG: BABG new BG: EISBG

Please select the corresponding BU, if there is no BU to move please select "Ignore".
Please do not select the same BU more than once!

old BU: BASBU → new BU: IELOB

old BU: DHVAC BD → new BU: MVD8D

old BU: LSBU → new BU: EISBG HQ

old BU: PLBU → new BU: SESBU

Ignore InProcess InProcess InProcess

← Closed ✓ Relocation

Relocation_Setting→DFx item

Authorized Roles: BG Window / Committee

SwitchUser English Welcome, BETTY.QIU

Role Objective Category Department DFX Threshold Safety Item Category DFX Item Preview DFX Item DFX Item Draft

BG: PSBG x Stage: Pick Stage Product Application: Please select Product Application Clear PA

Search DFX: ABCD Status: AVAILABLE Time: Last start Update Last end Update Delete Existed Item Relocation Item

Action Item No Item Category Requirement EnglishRequirement AP ItemMethod Create Time Last

DELTA SQMS DQA FMEA Scorecard DQA ScoreCard(archived)

SwitchUser English Welcome, BETTY.QIU

Choose the BG or Product Application copy to New BG

③ Select the original BG & PA
Please choose the BG or Product Application to copy

old BG: BABG product Application: Please select Product Application Clear PA

Please choose the BG to add

new BG: Pick BG ④ Select the BG & PA to transfer to.

Cancel Change ⑤ click icon "Change"

Relocation Item

OA Form No	BG	DFx	OA Result Time	Create Time	OA Status	File
2-fa47ba62b-416			8:00)	8:00)		
11b6ada8-9790-4caf-b764-17e50db5b82b	DSBU,EVSBG,BABG,EISBG,IABG	ABCD	BETTY.QIU 2026-04-29 14:03 UTC(+08:00)	BETTY.QIU 2026-04-29 14:03 UTC(+08:00)	APPROVE	
75e92e15-866e-4cc7-ae c7-36dc7d4fd316	BABG,FMBG,PSBG,IABG	DFr	BETTY.QIU 2026-04-29 14:03 UTC(+08:00)	BETTY.QIU 2026-04-29 14:03 UTC(+08:00)	APPROVE	
1bb65ddf-c238-4198-9ef e-dad5e656bbec	BABG,IABG	ABCD	BETTY.QIU 2026-04-29 14:03 UTC(+08:00)	BETTY.QIU 2026-04-29 14:03 UTC(+08:00)	APPROVE	
a7485d4a-e9c6-4762-aff5-9fb942882f92	IABG	DFa	BETTY.QIU 2026-04-29 14:08 UTC(+08:00)	BETTY.QIU 2026-04-29 14:08 UTC(+08:00)	APPROVE	
082427c0-7802-446c-baea-d82f060ffdc1	BABG	DFsr	BETTY.QIU 2026-05-05 17:40 UTC(+08:00)	BETTY.QIU 2026-05-05 17:40 UTC(+08:00)	APPROVE	

⑤ Automatically submit to the OA system for review.

Maintain DFX database

[DQA Homepage](#) > [Setting](#) > [Add DFx Item](#) ERIN.KANG

DELTA

SQMS DQA

FMEA Scorecard DQA ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Step1: 建立條文背景說明 (Background)

* Reason
Pick a value

Cannot be blank

Brief Detail Of Inquiry

Observation

Recommendation

Setp1 Build 條文背景說明Background of the Clauses :
Reason 原因為必須填寫
Brief Detail Of Inquiry 說明細節
Observation 觀察現象
Recommendation 建議措施

Step2: 設定適用範圍 (Target Setting)

* BG
PSBG ×

* DFx
DFq

* Item No
A-000046

* Review Stage
DVT × EVT2 × EVT1(EVT) ×

* Product Application
Adapter / IT / General + 7

Step2 設定適用範圍Define Scope of Application
BG 選擇適用的BG
DFx 選擇適用的DFx
Item No. 條文ID為系統自動帶入
Review Stage 設定條文評估的Stage
Product Application 設定條文適用的產品/ 產業/ 應用

Step3: 條文屬性分類 (Classification)

* Object Category
Mechanical

Authorized
DFx Owner/ Executor
DFx Committee

Step3 條文屬性分類Classification of Clause Attributes
Item Cate. DFx自身的分類
Object Cate. 全台達共用的分類

Requirement Setting)

PM/ PL

DFx Owner

DFx Committee

Read

Read/Edit

Read/Edit

DQA Homepage > Setting > Add DFX Item

DELTA

SQMS DQA

FMEA

Scorecard

DQA

ScoreCard(archived)

SwitchUser

English

Welcome, ARTHUR.MD.CHANG

Step4: 建立條文規範內容 (Requirement Setting)

IF

非塑膠殼之 adapter 產品其高壓 (>400V)之 TO-220 零件

38/1500

THEN

其中間線腳需錫腳加工且 ≥ 3.5 mm

21/1500

ELSE

避免灰塵沾覆造成 arcing 跳火

19/1500

Item Requirement

非塑膠殼之 adapter 產品其高壓 (>400V)之 TO-220 零件
其中間線腳需錫腳加工且 ≥ 3.5 mm
避免灰塵沾覆造成 arcing 跳火

Item Requirement (English)

Non-plastic shell adapter products
of which the architrave feet processing and ≥ 3.5 mm

AP

5

H

PM/ PL

DFx Owner

DFx Committee

Read

Read/Edit

Read/Edit

Setp4 Build 條文規範內容 contents of this DFX item :

IF 說明條文前提
THEN 說明條文要求內容
ELSE 說明條文要避免的風險
Item Requirement. 自動將上述三格合併
Item Requirement. English. 請填寫全文英文版本
設定O/ S/ D 黃色按鈕AP可參考設定標準(1-10分)

Authorized
DFx Owner/ Executor
DFx Committee

DQA Homepage > Setting > Add DFX Item

Non-plastic shell adapter products

Its high (> 400 v) of the TO - 220 parts of which the architrave feet processing and ≥ 3.5 mm

Avoid arcing fires caused by dust.

* O

9

* S

8

* D

5

AP

H

Step5: 設定評分方式 (Scoring Method Setting)

* Need Upload File

☐ True ☒ False

* Item Method

MeasurevalueA

* Measure Pass Rule

3.5

1000

Step6: 相關參考文件及工具 (References & Others)

E.Form.No of SQA

0/1500

Tutorial Url

Formula Url

V&V Id

Remark

0/1500

Authorized

DFx Owner/ Executor

DFx Committee

PM/ PL	DFx Owner	DFx Committee
Read	Read/Edit	Read/Edit

回到角色選擇

Back to role selection

Setp5 設定評分方式Set Grading Criteria :

Need Upload File 評分者是否需要上傳佐證文件

Item Method 條文評分方式

Situational 是非題

Measure value A 數值填空題

Measure Pass Rule 填空題過關範圍

Setp6 相關參考文件及工具 Related References and Tools :

E.Form. No 數位8D系統編號

V&V ID 測試項目編號

Tutorial Url 依據文件連結

Formula Url 小工具連結

Remark 條文備註

“Refer Files Upload” 評分協助圖片及檔案

86 Delta Confidential

DELTA

DQA Homepage > Setting > Add Dfx Item

➤ Dfx條文送出簽核，需先在Dfx item Draft 將要送出的條文勾選後，再按下Send to OA Review

After submit the Dfx items, the Dfx items will go into "Dfx item Draft", please select the items, and click "Send to OA Review"

DELTA SQMS DQA FMEA Scorecard DQA ScoreCard(archived) English Welcome, PENNY.PAI

Role Objective Category Department Dfx Threshold Safety Item Category Dfx Item Preview Dfx Item Draft OA Review List

BG: FMBG x Stage: Pick Stage Product Application: DC Fan / IT / Telecom x Clear PA

Search Q Dfx: DFa

3 Send To OA Review + Add + Import Excel Delete

Action	Item No	Item Category	Requirement	AP	ItemMethod	Create Time	BG	Status	OASatus
2 ☒	A-003877	Fan	熱熔結構鐵殼需有定位孔,且符合以下要求 A.定位孔為圓形 B.定位孔直徑Min2.0mm	H	Situational	PENNY.PAI 2024-07-19 10:45 UTC(+08:00)	FMBG	ADD	INIT

請特別注意不同BG不要一起勾選送OA Review(因為簽核人員不同)，下圖範例，紅色框選處可以一起送，綠色框選處可以一起送，但是紅色框綠色框選的條文不可以一起送OA(不同BG因為簽核人員不一樣)

Important: Avoid submitting different BGs for OA review together (different approvers required).

Red box selections: Can be submitted together.

Green box selections: Can be submitted together.

Red + Green mixed: Cannot be submitted together due to differing BG reviewers.

Item No	Item Category	Requirement	English Requirement	AP	ItemMethod	Create Time	BG	Status
A-001903	EMC EMS	理線時, 電源線與訊號線需分開, 避免干擾問題發生	理線時, 電源線與訊號線需分開, 避免干擾問題發生	H	Situational	CHAOFAN ZHANG 2025-05-29 13:06 UTC(+08:00)	EISBG,PESBG	MODIFY
A-001973	Drawing	CASE在設計時需要作 Tolerance analysis , 重要尺寸須於2D圖上以*號顯示。 Tolerance analysis is required during designing cas	CASE在設計時需要作 Tolerance analysis , 重要尺寸須於2D圖上以*號顯示。 Tolerance analysis is required during designing cas	H	Situational	CHAOFAN ZHANG 2025-05-29 13:16 UTC(+08:00)	EISBG,PESBG	MODIFY
A-001990	Material	Connector 下腳長度必須配合板PCB厚度, 大於板厚 1.4 mm 以上, 以避免無線尾。 The lead of c onnector must compliant with the thickn	Connector 下腳長度必須配合板PCB厚度, 大於板厚 1.4 mm 以上, 以避免無線尾。 The lead of c onnector must compliant with the thickn	M	Situational	VIC.TSAI 2025-03-18 17:23 UTC(+08:00)	EISBG,PESBG,PSBG	MODIFY
A-002037	Fan	FAN組立 1. 附近所有零件需確認保持距離, 不可觸碰扇葉導致異音。 2. FAN組立方式需在S/N註明 3. FAN wire與其他易受外力移動的物體(如: 輸出線) 有接觸時 應切金線與零件間之	FAN組立 1. 附近所有零件需確認保持距離, 不可觸碰扇葉導致異音。 2. FAN組立方式需在S/N註明 3. FAN wire與其他易受外力移動的物體(如: 輸出線) 有接觸時 應切金線與零件間之	H	Situational	VIC.TSAI 2025-03-18 17:24 UTC(+08:00)	EISBG,PESBG,PSBG	MODIFY

DQA Homepage > Setting > Modify DFX Item

1

Click edit to modify DFX item

2

3

Into DFX item

Step1: 建立條文背景說明 (Background)

Reason
Pick a value
Cannot be blank

Brief Detail Of Inquiry

Observation

Recommendation

Step2: 設定適用範圍 (Target Setting)

* BG
PSBG

* DFX
DFq

* Item No
A-000046

* Review Stage
DVT × EVT2 × EVT1/EVT

* Product Application
Adapter / IT / General

Step3: 條文屬性分類 (Classification)

* Item Category
Mechanical-Mechanical-Safety

* Object Category
Mechanical

Step4: 建立條文規範內容 (Requirement Setting)

IE

Copyright © 2023 Delta IT. All Rights Reserved.

Action	Item No	Item Category	Requirement	English Requirement	AP	Item Method	Create
	A-000001	LAYOUT	PWB Layout 必須與Schematic的Net List及零件吻合 The PWB layout must match the schematic's netlist and compon		H	Situational	ART 202 (+08
	A-000001	SiC	Supplier should be selected based on course ng plan - ST, Wolf speed(C				ART 888
	A-000001	Connector	For Innergie: 需定義轉接頭尺寸 避免不同型號的				

DQA Homepage > Setting > Modify DFX Item

➤ DFX條文送出簽核，需先在DFX item Draft 將要送出的條文勾選後，再按下Send to OA Review

After submit the DFX items, the DFX items will go into “DFX item Draft”, please select the items, and click “Send to OA Review”

DELTA SQMS DQA FMEA Scorecard DQA ScoreCard(archived) English Welcome, PENNY.PAI

Role Objective Category Department DFX Threshold Safety Item Category DFX Item Preview DFX Item Draft OA Review List

BG: FMBG Stage: Pick Stage Product Application: DC Fan / IT / Telecom Clear PA

Search DFX: DFa

Send To OA Review Add Import Excel Delete

Action	Item No	Item Category	Requirement	AP	ItemMethod	Create Time	BG	Status	OAStatus
☒	A-003877	Fan	熱熔結構鐵殼需有定位孔,且符合以下要求 A.定位孔為圓形 B.定位孔直徑Min2.0mm	H	Situational	PENNY.PAI 2024-07-19 10:45 UTC(+08:00)	FMBG	ADD	INIT

請特別注意不同BG不要一起勾選送OA Review(因為簽核人員不同)，下圖範例，紅色框選處可以一起送，

綠色框選處可以一起送，但是紅色框選處的條文不可以一起送OA(不同BG因為簽核人員不一樣)

Important: Avoid submitting different BGs for OA review together (different approvers required).

Red box selections: Can be submitted together.

Green box selections: Can be submitted together.

Red + Green mixed: Cannot be submitted together due to differing BG reviewers.

Item No	Item Category	Requirement	English Requirement	AP	ItemMethod	Create Time	BG	Status
A-001903	EMC EMS	理線時, 電源線與訊號線需分開, 避免干擾問題發生	理線時, 電源線與訊號線需分開, 避免干擾問題發生	H	Situational	CHAOFAN ZHANG 2025-05-29 13:06 UTC(+08:00)	EISBG,PESBG	MODIFY
A-001973	Drawing	CASE在設計時需要作 Tolerance analysis , 重要尺寸須於2D圖上以*號顯示。 Tolerance analysis is required during designing cas	CASE在設計時需要作 Tolerance analysis , 重要尺寸須於2D圖上以*號顯示。 Tolerance analysis is required during designing cas	H	Situational	CHAOFAN ZHANG 2025-05-29 13:16 UTC(+08:00)	EISBG,PESBG	MODIFY
A-001990	Material	Connector 下腳長度必須配合板PCB厚度, 大於板厚 1.4 mm 以上, 以避免無線尾。 The lead of c onnector must compliant with the thickn	Connector 下腳長度必須配合板PCB厚度, 大於板厚 1.4 mm 以上, 以避免無線尾。 The lead of c onnector must compliant with the thickn	M	Situational	VIC.TSAI 2025-03-18 17:23 UTC(+08:00)	EISBG,PESBG,PSBG	MODIFY
A-002037	Fan	FAN組立 1. 附近所有零件需確認保持距離, 不可觸碰扇葉導致異音。 2. FAN組立方式需在S/N註明 3. FAN wire與其他易受外力移動的物體(如: 輸出線) 有接觸時 請勿拉扯其他零件	FAN組立 1. 附近所有零件需確認保持距離, 不可觸碰扇葉導致異音。 2. FAN組立方式需在S/N註明 3. FAN wire與其他易受外力移動的物體(如: 輸出線) 有接觸時 請勿拉扯其他零件	H	Situational	VIC.TSAI 2025-03-18 17:24 UTC(+08:00)	EISBG,PESBG,PSBG	MODIFY

DQA Homepage > Setting > Add DFX Item(Import)

- **下載格式:** DFX item > Existed item > Send Exist DFX item to you by mail > 收到mail並按下download · 系統會自動下載至個人電腦Upon receiving the email, click "download" and the system will automatically download the file to your PC.

The screenshot shows the top navigation bar of the DQA system. The 'DFx Item' tab is highlighted with a red box and a circled '1'. Below the navigation bar, there are search filters: 'BG: Pick BG', 'Stage: Pick Stage', 'Product Application: Please select BG First', and a 'Clear PA' button. A search bar contains 'DFx: DFa' and 'Status: AVAILABLE'. A green box with a circled '2' highlights the 'Existed Item' button.




The screenshot shows a dialog box titled 'Download DFX Item Excel'. It contains fields for 'BG: FMBG' and 'DFx: DFa', and a checkbox labeled 'Have Delete Item'. A green box with a circled '3' highlights the 'Send Exist DFX Item to you by mail' button. A 'Cancel' button is also visible.

4

Hint!

Scorecard system has sent the Exist DFX Item excel file to your mailbox, please wait

OK

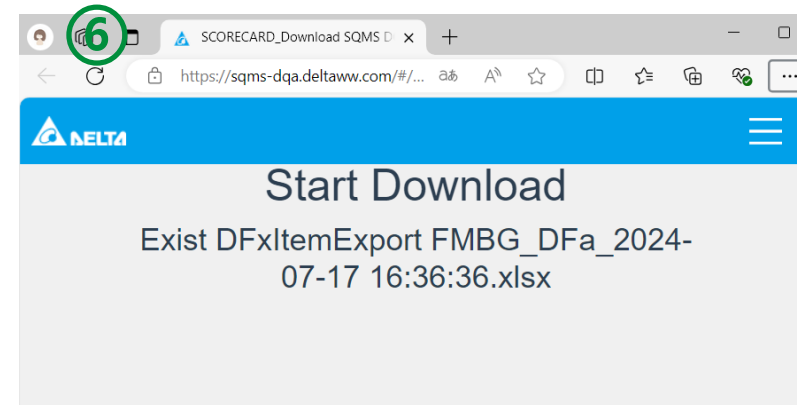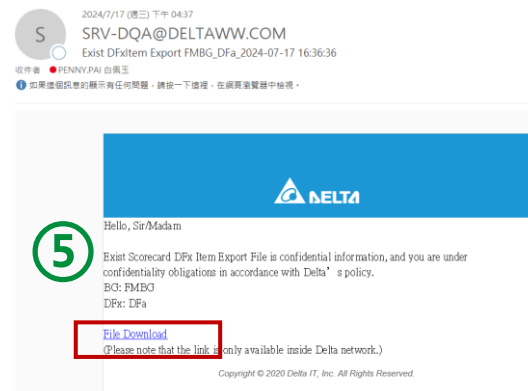

Excel資料結構說明

Excel Structure intro

依照條文新增需求提出，若無特殊，選Regulation
Submit new requests according to the clauses.
Choose "Regulation" by default unless specified
otherwise.

依照條文內容選擇適合的選項
by clause chose these two item

No	Type	DFx	ItemNo	DeleteComment	Reason	ObjectiveCategory	ItemCategory
1	MODIFY	DFa	A-003694		Regulation requirements	Mechanical	Design @ Design @ Other
2	MODIFY	DFa	A-003695		Regulation requirements	Mechanical	Design @ Design @ Other
3	MODIFY	DFa	A-003696		Regulation requirements	Mechanical	Design @ Design @ Other
4	MODIFY	DFa	A-003697		Regulation requirements	Mechanical	Design @ Design @ Other
5	MODIFY	DFa	A-003698		Regulation requirements	Mechanical	Design @ Design @ Other
6	MODIFY	DFa	A-003699		Regulation requirements	Mechanical	Design @ Design @ Other
7	MODIFY	DFa	A-003700		Regulation requirements	Mechanical	Design @ Design @ Other
8	MODIFY	DFa	A-003701		Regulation requirements	Mechanical	Design @ Design @ Other
9	MODIFY	DFa	A-003702		Regulation requirements	Mechanical	Design @ Design @ Other
10	MODIFY	DFa	A-003703		Regulation requirements	Mechanical	Design @ Design @ Other
11	MODIFY	DFa	A-003704		Regulation requirements	Mechanical	Design @ Design @ Other


If	Then	Else	ItemRequirementEnglish	ItemMethod	MeasurePassRuleMin	MeasurePassRuleMax
免Label設計沖壓件表面刻字需滿足: 1 字元高度為1.5~3.0mm (最小不可低於1.0mm) 2 字碼內容盡可能簡化(如左圖): 若字碼內容無法簡化(如右圖),則產品平面度需加大20%	IF 欄位放條文內容			Situational	- Situational: Y/N - MeasurevalueA: 使用時機為條文可以用數據判定，Ex. H/S 長度需 2~10，則 - MeasurePassRuleMin : 2 - MeasurePassRuleMax : 10	
Pillow & cover鐵件: 1. 若為鑄造結構產品,只能用SUS材質; 2. 若為表面局部裸露結構,則選用SPCC材質(或不銹鋼),禁用SPCC/SECC,避免鐵件裸露處氧化生銹. (若客戶指定SECC則此處打N並提供證明) 3. 不影響外觀 或客戶可接受情況下評估使用預鍍材 以降低材料成本 (比如 , 只要求內側是黑色時可使用預鍍材)				Situational		

O	S	D	Brief	Obse	Recc	EFor	Tutor	Form	V&V	Rem	Stage @ RFQ	Stage @ Prototype	Stage @ Concept Design	Stage @ Detailed Design	Stage @ EVT1(EVT)	Stage @ EVT2	Stage @ DVT	Stage @ PVT	Stage @ MP			
6	8	4	與DFx 分數不同 OSD 對照AP table 的結果 需和DFx Priority 一樣 mapping with AP table to come out the SOD										選單: Prototype / EVT /EVT2/DVT/PVT					V	V	V		

[illegible]

DQA Homepage > Setting > Add Dfx Item(Import)

Excel資料結構說明 Excel Structure intro

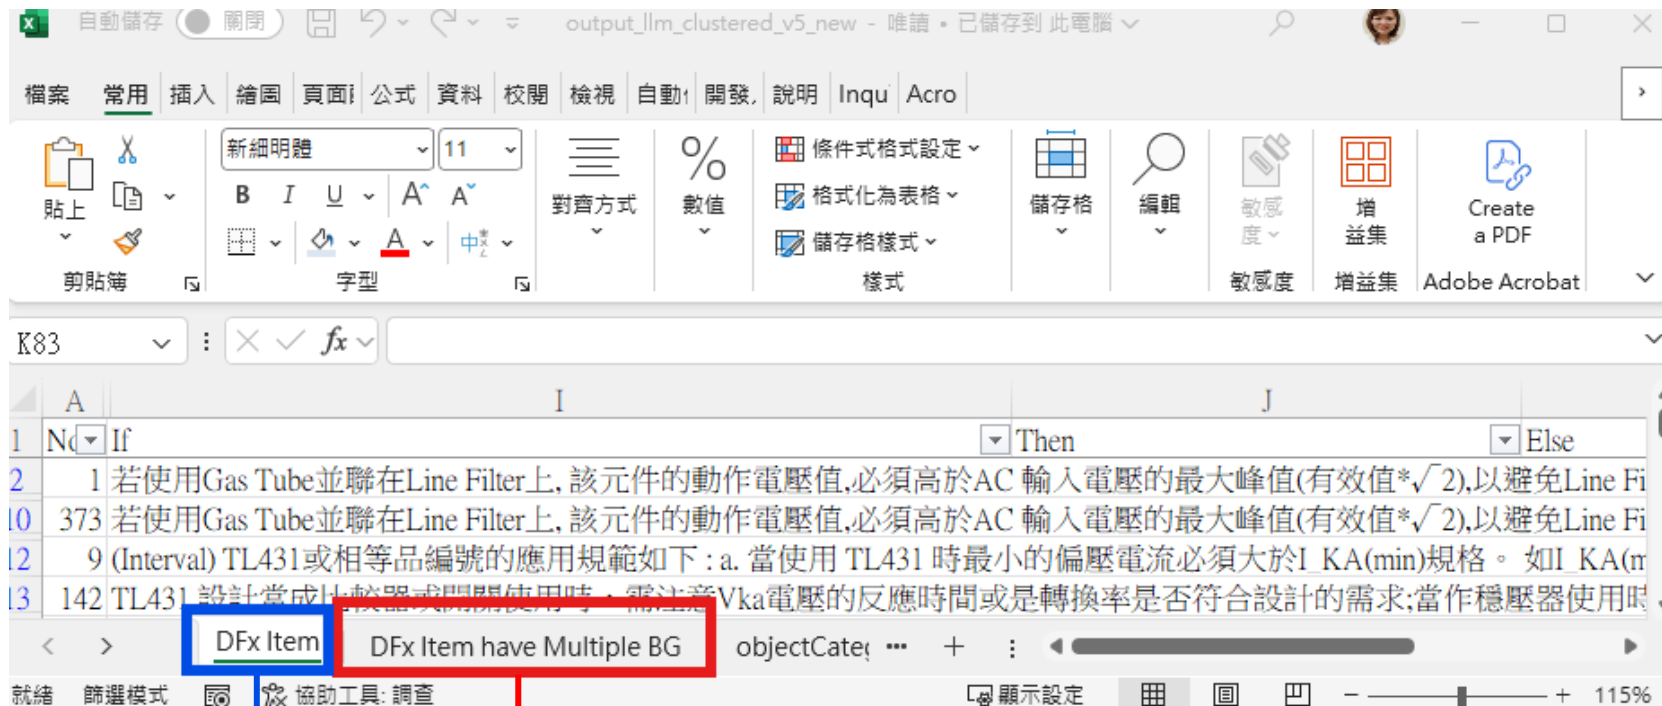

該BG現行於系統上存在的條文
Dfx items of which BG in system

與其他BG共用的條文
Clauses shared with other BGs

兩者條文並不重複
There is no overlap between two sheet of clauses

DQA Homepage > Setting > Add DFX Item(Import)

上傳條文upload the DFX items:

English Welcome, PENNY.PAI

Role Objective Category Department DFX Threshold Safety Item Category DFX Item Preview DFX Item Draft OA Review List

BG: FMBG Stage: Pick Stage Product Application: Please select Product Application Clear PA

Search DFX: DFa Send To OA Review + Add + Import Excel Delete

3

Upload DFX Item Excel

BG: FMBG DFX: DFa

Hint

1. 請確定上傳的Excel 與最新版的 Excel Template 其 Column 是否一致
2. ADD 或 MODIFY 的Item 其所有必填欄位必須有值
3. MODIFY 的Item 如果有跨 BG，將不會更新
4. 如缺少 Object Category，請於 Object Category [主檔頁維護](#)
5. 如缺少 Item Category，請於 ItemCategory [主檔頁維護](#)
6. 如缺少 Product Application，請 DFX Admin 於 PA BG [主檔頁維護](#)
7. AP Value 對應矩陣[點此](#)
8. 將產出匯入結果的Excel

- 一定要先選，檔案才會成功上傳
Selection is required prior to a successful file upload.

4 拖曳的方式上傳

Please drag the excel file here

Exist DFXItemExport FMBG_DFa_2024-07-17 16_36_36.xlsx

Cancel

- 上傳後，系統會自動下載Import result
After uploaded will download the import result automatically

近期下載記錄

Exist DFXItemExport
FMBG_DFa_2024-07-19 2024-07-19
10_45_18 Import Result.xlsx
3.3 KB • 53 分鐘前

完整下載記錄

- 成功將回傳Success,
- 失敗會回傳失敗的原因
- 只要有一個條文失敗，整份都會上傳失敗
If any single clause fails, the entire upload will fail.

	A	
1	No	Res
2	1	Success
3	2	Item Category is Empty

DQA Homepage > Setting > Add DFX Item(Import)

- **DFx條文送出簽核**，需先在DFx item Draft 將要送出的條文勾選後，再按下Send to OA Review

After submit the DfX items, the DfX items will go into “DfX item Draft” , please select the items, and click “Send to OA Review”

SQMS DQA
FMEA
Scorecard
DQA
ScoreCard(archived)
English
Welcome, PENNY.PAI

Role
Objective Category
Department
DFx
Threshold
Safety
Item Category
DFx Item Preview
DFx Item Draft
OA Review List

BG: FMBG
Stage: Pick Stage
Product Application: DC Fan / IT / Telecom
Clear PA

Search
DFx: DFa

Send To OA Review
Add
Import Excel
Delete

Action	Item No	Item Category	Requirement	AP	ItemMethod	Create Time	BG	Status	OAStatus
☒	A-003877	Fan	熱熔結構鐵殼需有定位孔,且符合以下要求 A.定位孔為圓形 B.定位孔直徑Min2.0mm	H	Situational	PENNY.PAI 2024-07-19 10:45 UTC(+08:00)	FMBG	ADD	INIT

請特別注意不同BG不要一起勾選送OA Review(因為簽核人員不同)，下圖範例，紅色框選處可以一起送，綠色框選處可以一起送，但是紅色框綠色框選的條文不可以一起送OA(不同BG因為簽核人員不一樣)

Important: Avoid submitting different BGs for OA review together (different approvers required).

Red box selections: Can be submitted together.

Green box selections: Can be submitted together.

Red + Green mixed: Cannot be submitted together due to differing BG reviewers.

Important: Not submitting different BG for different together (different reviewers together)

Red box selections: Can be submitted together.

Green box selections: Can be submitted together.

Red + Green mixed: Cannot be submitted together due to differing BG reviewers.

Item No	Item Category	Requirement	English Requirement	AP	Item Method	Create Time	BG	Status
A-001903	EMC EMS	理線時,電源線與訊號線需分開,避免干擾問題發生	理線時,電源線與訊號線需分開,避免干擾問題發生	H	Situational	CHAOFAN ZHANG 2025-05-29 13:06 UTC (+08:00)	EISBG,PESBG	MODIFY
A-001973	Drawing	CASE在設計時需要作 Tolerance analysis , 重要尺寸須於2D圖上以"號顯示"。 Tolerance analysis is required during designing cas	CASE在設計時需要作 Tolerance analysis , 重要尺寸須於2D圖上以"號顯示"。 Tolerance analysis is required during designing cas	H	Situational	CHAOFAN ZHANG 2025-05-29 13:16 UTC (+08:00)	EISBG,PESBG	MODIFY
A-001990	Material	Connector 下腳長度必須配合板PCB厚度,大於板厚 1.4 mm 以上,以免避免無尾。 The lead of c onnector must compliant with the thickn	Connector 下腳長度必須配合板PCB厚度,大於板厚 1.4 mm 以上,以免避免無尾。 The lead of c onnector must compliant with the thickn	M	Situational	VIC TSAI 2025-03-18 17:23 UTC (+08:00)	EISBG,PESBG,PSBG	MODIFY
A-002037	Fan	FAN組立 1. 附近所有零件需確認保持距離,不可觸碰扇葉導致異音。 2. FAN組立方式需在S/N註明 3. FAN wire與其他易受外力移動的物體(如:輸出線)	FAN組立 1. 附近所有零件需確認保持距離,不可觸碰扇葉導致異音。 2. FAN組立方式需在S/N註明 3. FAN wire與其他易受外力移動的物體(如:輸出線)	H	Situational	VIC TSAI 2025-03-18 17:24 UTC (+08:00)	EISBG,PESBG,PSBG	MODIFY

DQA Homepage > Setting > Add DFX Item(Import)

➤ OA 簽核:

全部	我的						
表單單號	主旨	申請人	狀態	處理日期	收到日期		
2023110208504	New model評估報告 - DQA Head審核:ITM DVT 評核_LCND0	FLONA.LEE 李艷	簽核完成	2023/11/30 11:16:12	2023/11/30 10:57:23		
2023110264863	DFx eForm Excel - Finish	PENNY.PAI 白佩玉	Finish		2023/11/29 17:13:28		

DFx eForm Excel

Form ID: 2023110264863

中文FAQHelp

Requester: PENNY.PAI 白佩玉Applicant: PENNY.PAI 白佩玉Apply Date: 2023/11/29

DFx Info

DFx : DFqDFX Item List

Approver List

Operations	Approver LV	Approver
	Chairman	GAVIN.CHIU
	Chairman	BRAD.WANG
	Chairman	ARTHUR.MD.CHANG
	Chairman	TIM.TSAI
	FMBG_Committee	CHANEL.LAI
	FMBG_Committee	TOM.TAI
	FMBG_Committee	ESME.LIU
	FMBG_Committee	ALYSON.PING
	FMBG_Committee	PENNY.PAI
	Owner	CHANEL.LAI

3389-DFx eForm Excel(2023110264863)Sign RecordsShare

2023/11/29 15:58

Start PENNY.PAI 白佩玉

Send

2023/11/29 16:15

FMBG_Committee PENNY.PAI 白佩玉

Approve

白佩玉 has already approved this e-form. Remaining approvers in this step no longer need to approve.

2023/11/29 17:13

Chairman BRAD.WANG 王千峰

Approve

王千峰 has already approved this e-form. Remaining approvers in this step no longer need to approve.


Close

-- 需經過committee 與Chairman簽核，才能算完成
need to sign by committee and Chairman
-- 條文變更會在簽核完後新開案機種才會變更，舊有已開案的，仍保持原本內容Changes apply to new projects post-approval; existing projects remain unaffected and keep original content.

Q&A

Q&A

- Q: 身為DFx Committee如何操作建立DFx Database How to establish a DFx Database as a DFx Committee member

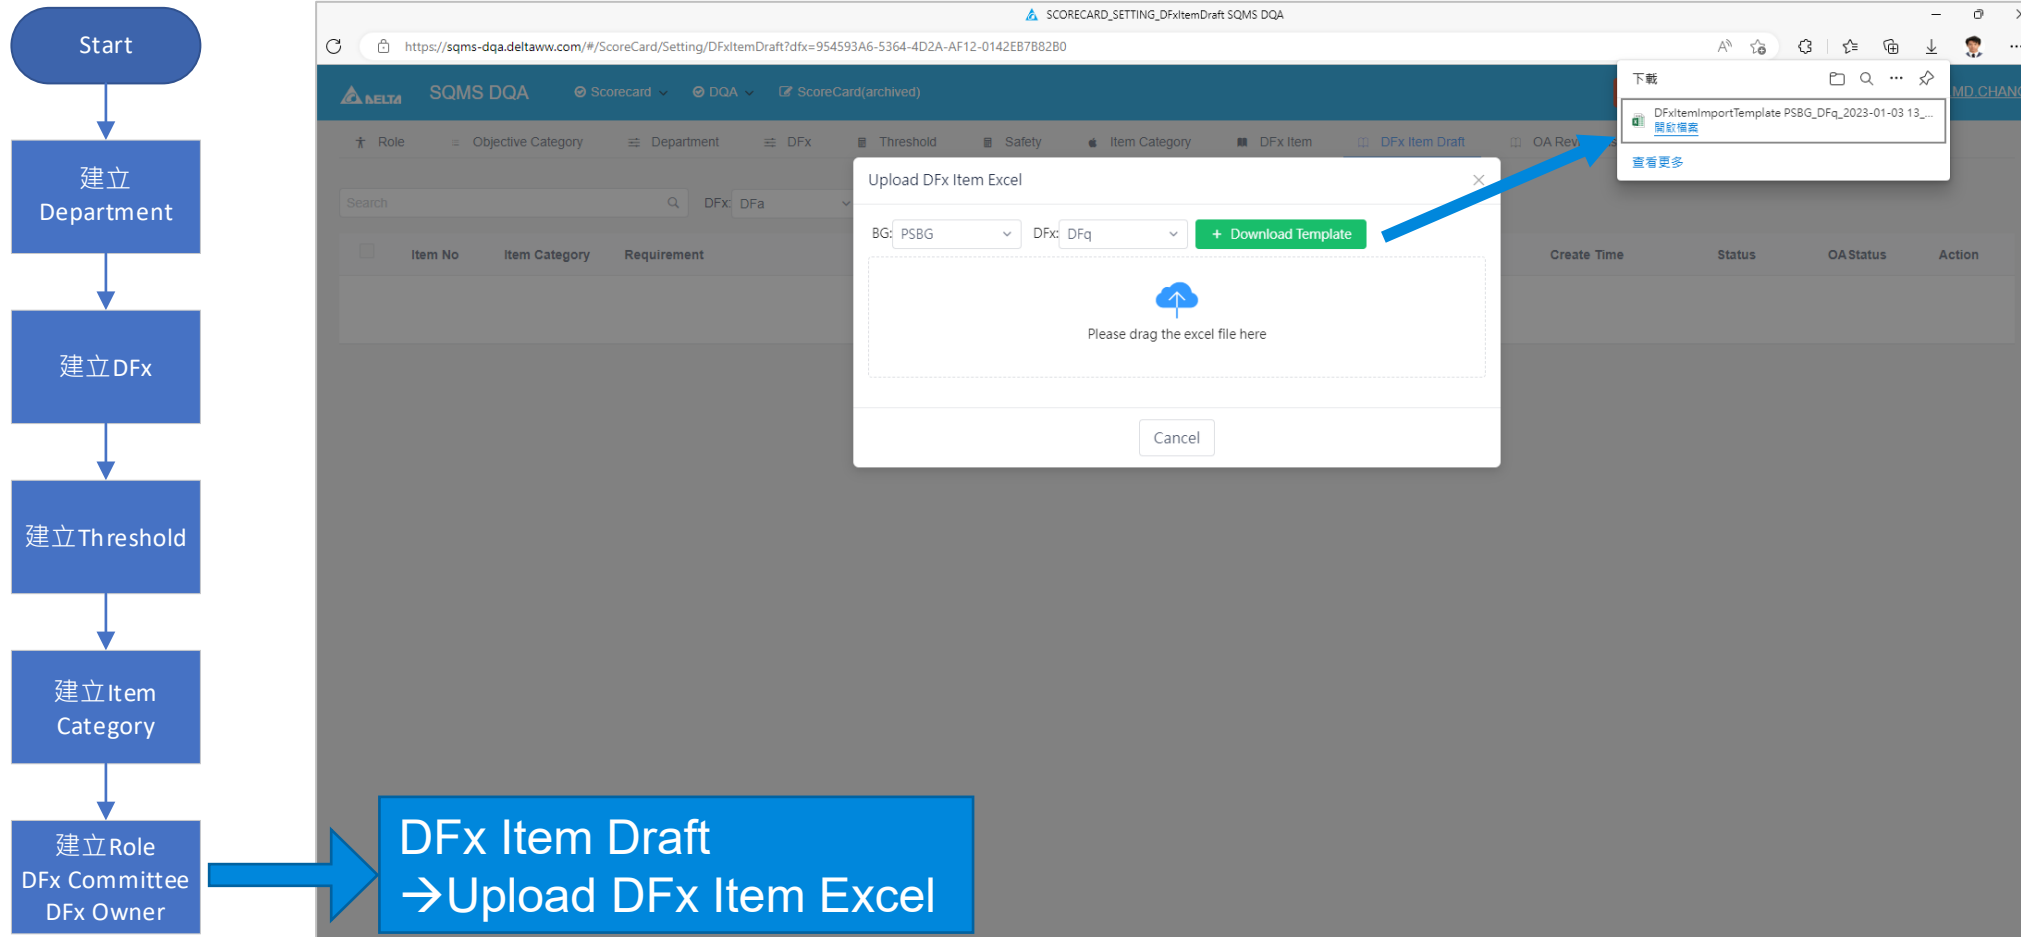

Q&A

- Q: 身為DFx Committee如何操作建立DFx Database How to establish a DFx Database as a DFx Committee member

要修改或刪除的條文，當Type為Mod或Del時，就要設定
The clause to be modified or deleted is set when Type is Mod or Del

	B	C	D	E	
1	Type	ItemNo	DeleteComment	Reason	ObjectiveCategory
2	ADD			Customer requirements	Product Performance
3	MODIA-000112			Customer requirements	Risk Management

當動作為刪除要填寫原因
If Type is Del, enter the reason

Type設定變更動作，有Add新增 / Mod修改 / Del刪除。提醒：Mod時，是全部設定覆蓋，並非只修改變更部分
Type Specifies the change action, including Add, Mod, and Del。Note: When Mod, all Settings are overwritten, not only changes

No	Type	ItemNo	DeleteComment	Reason	ObjectiveCategory	ItemCategory
1	ADD			Customer requirements	Product Performance	
2	MOD	000112		Customer requirements	Risk Management	
3	MOD	000112		Customer requirements	Risk Management	

可從此處複製你的條文分類貼到主檔DFx Item
From here you can copy your clause categories to the main file DFx Item

DFx Item	objectCategory	itemCategory
----------	----------------	--------------


Q&A

- **Q: 身為PM/ PL為何無法Create DFx in Score Card System? Why can't the PM/PL create a DFx in the Score Card System?**

→請先確認專案以下資訊必須填寫：Please confirm that the following information is required for this project:

1. Product Application 不可為空
2. Product Application Child Node 不可為空
3. Model Name 不可為空
4. PM 不可為空
5. Stage 不可為空
6. Score Type 為 Y

進入Task → Actions → Create DFx in Score Card System

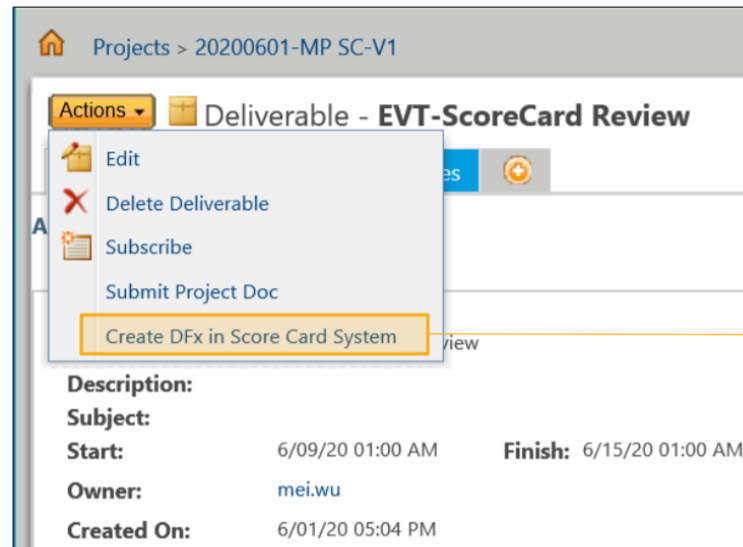

- 須符合以下條件，才能觸發此功能(P.23 有圖示說明)
1. 屬Phase 1所Rollout的BG/BU所開的專案
 2. 執行人為Task Owner
 3. Task被定義為Score Card Review的Task
 4. 尚未執行過此功能

Q&A

- **Q: 身為PM/ PL為何更新了PJM專案資訊後，DFx沒有跟著更新？ As the PM/PL, why didn't Dfx update its information after the PJM project information was updated?**
→ 紅色框選的兩個欄位必須填寫，才能同步PJM跟DFx The two fields highlighted in red must be filled in for PJM and Dfx to be synchronized.

PJM開立專案-3 (PJM Create Project--3)

The screenshot shows the 'New Project' dialog box with the following fields and annotations:

- Project No.:** Text input field.
- Customer Name:** Text input field.
- * Product Name:** Text input field containing 'lanteia.tseng_training project.1'. Annotation: 可自行定義Product Name (Can be self-defined Product Name).
- DFx Number:** Text input field.
- Related System:** A group of dropdown menus with '+' and '-' buttons. The dropdowns are set to 'Rational', 'SQMS-DFMEA', 'SQMS-Dfx', and 'DMS'. Annotation: 必填! 持續點擊2次【+】後，分別固定選擇【Rational、SQMS-DFMEA、SQMS-Dfx、DMS】。After clicking [+] twice continuously, select [Rational, SQMS-DFMEA, SQMS-Dfx, DMS] respectively.
- Remark:** Text input field.
- Model Name:** Text input field containing 'test'. Annotation: 輸入Model Name (Enter Model Name).
- * Product Application:** Dropdown menu set to 'ITTest'.
- * Product Application Child Node:** Dropdown menu set to 'IT-General : For EISBG'.
- Project Class:** Dropdown menu set to 'A'.
- Project Phase:** Dropdown menu set to 'RFQ'. Annotation: 目前專案階段 project stage (Current project stage).
- Execution Control:** Radio buttons for 'Manually control project execution' and 'Automatically execute activities and deliver tasks' (selected).
- Link deliverables with project activities:** Checkmark.

Annotations on the left side of the dialog box:

- 專案等級Project level (Project level)
- 目前專案階段 project stage (Current project stage)

Annotation on the right side of the dialog box:

- 依BG/BU列出Product Application 依選擇的Product Application列出可選擇的Product Application Chile Node (List Product Application by BG/BU. Lists the selectable Product Application Chile Node according to the selected Product Application.)

Annotation at the bottom right:

- 點擊OK Click OK (Click OK)

Q&A

- **Q: 更新PJM的PA後，DFx的條文沒有更新？ After updating the PA of PJM, the clauses of DFX were not updated?**

→需要請PM至coverpage按下refresh bottom

PM need to go to the cover page and press refresh bottom.

DQA Homepage > Project > Cover Page

The screenshot displays the DQA system interface. At the top, there's a navigation bar with 'SQMS DQA' and various tabs like 'FMEA', 'Scorecard', 'DQA', and 'ScoreCard(archived)'. The main content area shows 'Organization Project Info' for Project Code: 78332327781, Project Name: AP-P780AM A, and Project Class: A. Below this, there's a 'Participants' section with Project Manager: SHERRY WU and Project Lead: JUDY SHIAU. A 'Refresh Project Item' button is highlighted with a red box and a callout: 'Refresh 專案的DFx item Refresh this project's DFX item'.

Overlaid on the interface is a 'Refresh Project' dialog box. It contains two dropdown menus: 'choose Stage' and 'choose Dfx'. The 'choose Stage' dropdown is highlighted with a red box and a callout: '選擇要refresh的stage Choose the stage'. The 'choose Dfx' dropdown is also highlighted with a red box and a callout: '選擇要refresh的DFx門派。 如果都不選就是refresh 整個專案所有門派 Select the DFX faction you want to refresh. If you don't select any, it will refresh all DFX in the entire project.' The dialog box has 'Closed' and 'Refresh' buttons. Below the dialog box, there's a red note: 'After refreshing the project, the score must be resubmitted to reflect the updated score.'

Q&A

- Q: 身為PM/ PL為何無法找到我想指定的DFx Owner

As a PM/PL, why can't I find the DFX Owner I want to designate?

→請聯繫DFx Owner前往Setting進行Role調整 Please contact the DFX Owner to adjust the Role in Settings.

SQMS DQA

Scorecard | DQA | ScoreCard(archived)

SwitchUser | English | Welcome, ARTHUR.MD.CHANG

Role

Objective Category | Department | DFx | Threshold | Safety | Item Category | DFx Item | DFx Item Draft | OA Review List

Role角色權限設定
Role list and role permission

+ Add

BG	BU	DFx	Type	AD Account	Action
PSBG	MMPBU	DFa	OWNER	KAI.HSIAO 蕭為凱 ROBERT.LUO 羅志成 NI.WAT.W NI.WAT WONG.JUK THANAKORN.SITT THANAKORN SITTTHISORN TIM.TSAI 蔡宇祥	
PSBG	MMPBU	DFauto	OWNER	Y.S.CHUNG 鍾元豪 SUJELI.LI 李秀利 WORAWIT.WORAWIT WISUTSAWAT PH	
PSBG	MMPBU	DFb	OWNER	SANDYYR.CHEN 陳怡蓉	

Create Role

Build new role

Role

BG

BU

DFx

OWNER

DSBU

DSBU

DFauto

Closed Create

Assign User Role

DfX Owner/ DfX Committee編輯調整權限

Adjust members list

Role:

BG:

BU:

DFx:

OWNER

PSBG

MMPBU

DFa

* If User Not found, please enter full AD Name

KAI.HSIAO 蕭為凱

ROBERT.LUO 羅志成

Ni.wat.W NI.WAT WONG.JUK

Thanakorn.Sitt THANAKORN SITTTHISORN

TIM.TSAI 蔡宇祥

Closed Assign

DFx Owner/ Executor

DFx Committee

PM/ PL	DFx Owner	DFx Committee
Read	Read/ Edit	Read/ Edit

回到角色選擇

Back to role selection

Q&A

Q4: issue已經Closed，為何cover page沒有更新分數？

The issue has been closed, so why isn't the score updated on the cover page?

→ 需要至打分頁按下submit，cover page的分數才會更新 You need to click submit on the scoring page for the score on the cover page to update.

Q5: cover page出現TODO(分數)代表什麼呢？ What does the "TODO (score)" sign on the cover page represent?


→ 代表該門派別尚未Submit，只有單純save分數，若要更新Cover page分數，請按出submit即會更新

This means that this Dfx has not yet submitted; only the score has been saved. To update the Cover page score, please click "submit."

Q6: 版本對齊產生進版後，評分者無法重新評分？ After version alignment generates a new version, raters are unable to re-rating?

→ 須按下橘色按鈕後，才能重新評分

You must press the orange button to re-scoring.

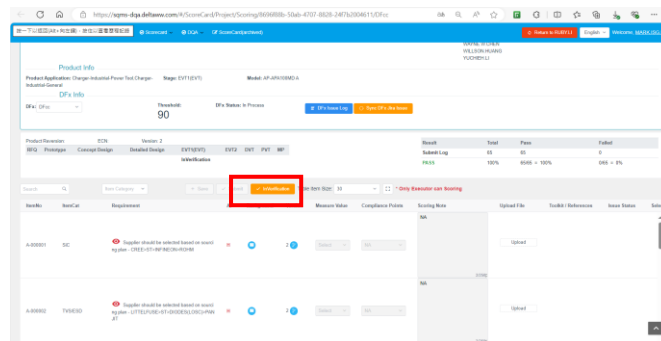

Q&A

- Q: 如何export機種該階段的所有issue?

Step1:
從coverpage link to jira

Step2:
選擇List View

Step3:
選擇columns裡的My Defaults
此處可以選擇想要倒出來的欄位

Step4:
選擇Excel (Current fields)

Delta Issue Log Table:

Key	Dfx	Status	Resolution	P	Updated	Due	Issue Owner	Issue Solution
SQMSISSUE-716950	Dfm	TO DO	Unresolved		03/Jan/24	19/Jan/24	VINCE.WANG 汪君宇	C505、C506且徑為16mm
SQMSISSUE-716948	Dfm	TO DO	Unresolved		03/Jan/24	19/Jan/24	VINCE.WANG 汪君宇	CY1~6、CY602 / 603皆有套鐵芯
SQMSISSUE-716949	Dfm	TO DO	Unresolved		03/Jan/24	19/Jan/24	VINCE.WANG 汪君宇	主板臥式AI件僅3顆
SQMSISSUE-716947	Dfm	TO DO	Unresolved		03/Jan/24	19/Jan/24	MARK.CHUNG 鍾皓任	連片利用率不足
SQMSISSUE-716929	Dfauto	TO DO	Unresolved		03/Jan/24	19/Jan/24	VINCE.WANG 汪君宇	Y電容與晶體皆有套鐵芯

Q&A

- **Q: 為什麼我看不到我機種的Jira issue? Why can't I see the Jira issue for my project?**

→Jira issue是在觸發的當下帶入相關權限人員，如果是在後期才加入專案團隊就會看不到，此時可以請PM協助加入，加入方式如下，點擊SQMS Watcher欄位出現的筆，並進行維護即可Jira issues are added to the relevant permissions at the time they are triggered. If someone joins the project team later, they won't see the issue. In this case, you can ask a PM to assist in adding them. The method is as follows: click the pen icon that appears in the SQMS Watcher section and perform maintenance.

SQMS-ISSUE / SQMSISSUE-732612

AP-P960AM A-EVT1(EVT)1-A-000006

1 of 31

Return to search

EditAdd commentAssignMoreDone

Export

Details

Type:DFx Test Failed V2Resolution:Done

Priority:High

Component/s:DQA

Labels:DFX

Stage ID:EVT1(EVT)

BG:PSBG

BU:APBU

Customer Name:SONY

Issue Note:前期驗證樣品，無環境測試

Measurement Value:MO

People

Assignee:RUBY.LI 李慧茹

Reporter:RUBY.LI 李慧茹

SQMS Watchers:AARON.SHE 余斐源, ABELYANG 楊靜, ACHIA.LU 呂振嘉, ALEC.HUANG 黃振傑, ALEX.WAN 萬鴻均, ALEX.ZHOU 周亮, ALLEN.HO 何家民, ALLEN.YU 尤文麟, ANDY.FY.HSIAO 蕭復元, ANDY.HSU 徐隆德, ANGEL.LIN 林繼利, ANGELO.YE 葉蘇林, ANTHONY.LIN 林璟, Anuwat.W, ARES.CHEN 陳盈源, ARTHUR.TING 丁昊宇, Atthapon, BARRY.YQ.CHEN 陳亦謙, BENSON.CHENG 鄭俊騰, BETTY.QIU 邱翊菁, BILLTER.CHAN 詹主民, Bomb, BQ.CHENG 陳寶泉, BRIAN.HSIEH, BRIAN.HUANG 黃哲偉, BRIAN.ZHOU 周代強, CADE.ZHANG 張晨晨, CAMILLE.WANG 王威帆, CANDY.LEE 李寶珍, CANDY.MA 馬文君, CAROL.HC.LIU 劉慧真, CAROL.YH.CHANG 張郁

Smarter. Greener. Together.