INTRODUCTION

Netziya is a technology-driven platform founded in 2025 with the objective of providing clear, reliable, and centralized visibility into network endpoints and web-accessible assets. The foundation of Netziya was driven by real operational challenges faced by organizations in managing distributed infrastructure, limited asset awareness, service availability issues, and increasing security risks.

The primary motive behind establishing Netziya is to eliminate fragmented monitoring approaches and provide organizations with a single, structured view of their digital environment. By enabling accurate identification and continuous monitoring of endpoints, web services, and security-related components, Netziya helps organizations maintain operational stability, reduce risk, and improve infrastructure oversight.

The mission of Netziya is to enable organizations to confidently monitor, manage, and secure their network and web assets through consistent visibility and actionable insights. The platform is designed to support proactive operations, early issue detection, and informed decision-making across IT and security functions.

Netziya focuses on key functional areas including endpoint reachability monitoring, web endpoint availability analysis, SSL/TLS certificate discovery and lifecycle monitoring, network asset identification, and operational status reporting. These capabilities are delivered through an integrated system designed for accuracy, scalability, and ease of use.

Netziya is intended for IT operations teams, network administrators, security professionals, and managed service providers who require dependable insight into their infrastructure for both daily operations and long-term governance. The platform supports organizations of varying sizes by offering structured visibility without reliance on multiple disconnected tools.

Official information, product updates, and documentation are available on the company website:
https://www.netziya.com

INTENDED USE & SCOPE

Netziya is designed to provide organizations with centralized visibility into network endpoints, web-accessible assets, and related operational and security indicators. The platform is intended to support continuous monitoring, discovery, and status assessment of infrastructure components that are owned, managed, or explicitly authorized for observation by the organization using the system.

The primary use of Netziya is to assist IT operations, network administration, and security teams in maintaining awareness of endpoint reachability, web service availability, SSL/TLS certificate status, and overall asset presence within a defined digital environment. Netziya enables early identification of operational issues, availability disruptions, and potential risk conditions through structured monitoring and reporting mechanisms.

Netziya is not intended to function as an active exploitation, penetration testing, or offensive security tool. The platform does not perform intrusive attacks, vulnerability exploitation, or unauthorized reconnaissance activities. It is not designed to replace dedicated vulnerability scanners, intrusion detection systems, or incident response platforms, but rather to complement existing operational and security workflows by improving visibility and awareness.

The platform is intended for use within enterprise, service provider, and organizational environments where monitoring authorization is established. Supported use cases include internal network monitoring, externally exposed service availability tracking, certificate lifecycle monitoring, and asset inventory validation across on-premises, cloud, and hybrid infrastructures. Use of Netziya should align with organizational policies, contractual obligations, and applicable regulatory or compliance requirements.

Users are responsible for ensuring that all monitored endpoints, domains, and assets fall within their ownership, administrative control, or documented permission scope. Proper configuration, access management, and responsible operation of the platform remain the responsibility of the organization and its authorized users. Netziya assumes no responsibility for misuse arising from unauthorized monitoring, misconfiguration, or violation of internal or external governance standards

KEY FEATURES & CAPABILITIES

Netziya provides a set of integrated capabilities designed to deliver consistent visibility into network endpoints and web-accessible assets. These features enable organizations to monitor availability, identify operational issues, and maintain awareness of asset status through a centralized platform.

End Point Visibility

- Real-time discovery of all endpoints across the network infrastructure
- Identification of managed and unmanaged devices
- Detection of servers, workstations, virtual machines, and network appliances
- OS and device fingerprinting using protocol and stack analysis
- IP, MAC address, hostname, and vendor identification
- Continuous monitoring of endpoint availability and status changes
- Visibility into endpoint service exposure and open ports
- Asset change tracking with historical endpoint records
- Foundation for security posture assessment and asset governance

Certyon (Certificate & TLS Visibility)

- Centralized visibility of SSL/TLS certificates across network assets
- Detection of expired, expiring, and misconfigured certificates
- Identification of weak encryption algorithms and deprecated TLS versions
- Certificate chain validation and trust verification
- Monitoring of certificate issuer, validity period, and key strength
- Alerts for certificate expiry and compliance violations
- Support for TLS 1.0, 1.1, 1.2, and 1.3 analysis
- Improved compliance with security and regulatory standards

Webyon (Web & Application Visibility)

- Discovery of web applications and web services across the network
- Identification of HTTP and HTTPS services running on endpoints
- Detection of exposed web ports and virtual hosts
- Web server fingerprinting and technology identification
- Visibility into application service versions and response headers
- Detection of unsecured or misconfigured web services
- Support for internal and externally accessible web assets
- Enhanced web attack surface awareness

Security & Access Control

- Role-Based Access Control (RBAC) with granular permissions
- Scoped access at organization, site, and subnet levels
- Secure authentication and session management
- Enforcement of least-privilege access principles
- Comprehensive audit logging for compliance and accountability

Scalability & Performance

- Optimized scanning and data processing for large networks
- Scalable architecture supporting enterprise and multi-site deployments
- Efficient handling of high-volume endpoint and flow data
- Designed for high availability and operational resilience

Single Sign-On (SSO) – Azure Integration

- Support for Single Sign-On (SSO) using Microsoft Azure Active Directory
- Secure authentication using OAuth 2.0 and OpenID Connect (OIDC)
- Centralized identity management through Azure AD
- Role and user mapping based on enterprise identity policies
- Elimination of local credential management
- Seamless user login experience across the platform
- Improved security posture through centralized authentication
- Alignment with enterprise IAM and Zero Trust architecture

SYSTEM REQUIREMENTS

This section outlines the minimum and recommended system requirements necessary for the reliable operation of the platform.

The software performs parallel subnet scanning, endpoint analysis, and continuous monitoring, all of which require sufficient system resources to ensure accuracy, stability, and optimal performance.

Supported Platforms

- Microsoft Windows Operating Systems only
- Windows 10 (64-bit)
- Windows Server 2019 (64-bit)
- Windows Server 2022 (64-bit)
- Supported on both physical and virtual machines

Recommended System Requirements

1. CPU:
   - 8-core or higher processor
   - Enables faster scanning and higher parallelism across multiple subnets

2. Memory (RAM):
   - 16 GB or more
   - Recommended for large-scale environments and intensive scanning workloads.

3. Storage:
   - SSD storage recommended for improved performance and faster data access

Performance Considerations

- Systems with fewer than 4 CPU cores are not supported
- Insufficient CPU resources may result in:
- Slower scan execution
- Incomplete subnet or port scans
- Reduced accuracy and responsivenes
- CPU cores are utilized to perform parallel subnet and port scanning operations
- Adequate system resources are required for optimal stability and performance

Resource Protection & CPU Throttling

- The platform includes a built-in resource protection mechanism to prevent system overload.
- When CPU utilization reaches **70% or higher**, active scanning services are automatically paused.
- Scanning and background services resume automatically once CPU utilization returns to safe levels.
- This mechanism ensures:
  - System stability
  - No impact on other critical workloads
  - Safe operation on shared or production systems
- Resource monitoring runs continuously and requires no manual intervention.

Deployment Notes

The platform is optimized for on-premise deployment on Windows systems

Can be installed on:

- Windows desktops
- Windows Server environments

Administrative privileges are required for:


- Installation
- Network scanning operations
- Service management

INSTALLATION STEPS


This section describes the end-to-end process to download, install, and access the Netziya platform.

Step 1: Start Trial & Download Installer


1. Go to netziya website www.netziya.com and on home page find start free trail click on it

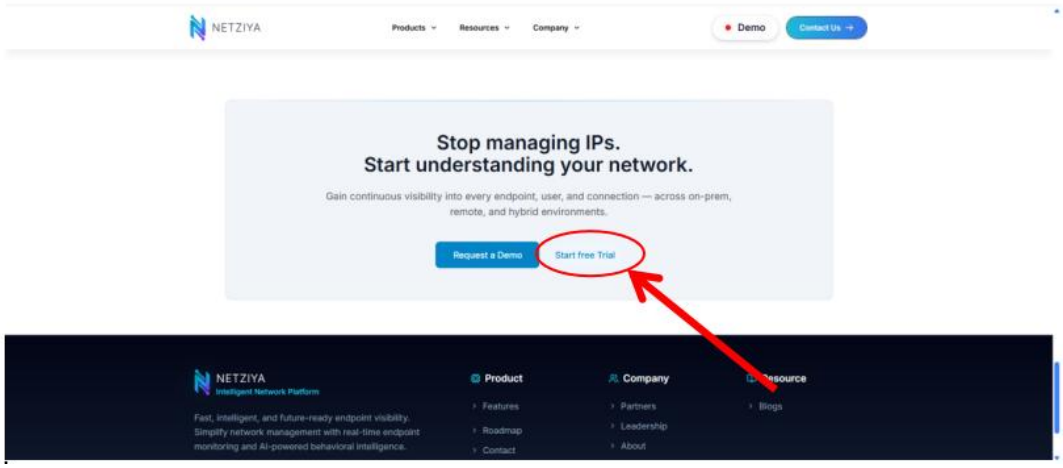


2. On start free trail page clik on get free trail

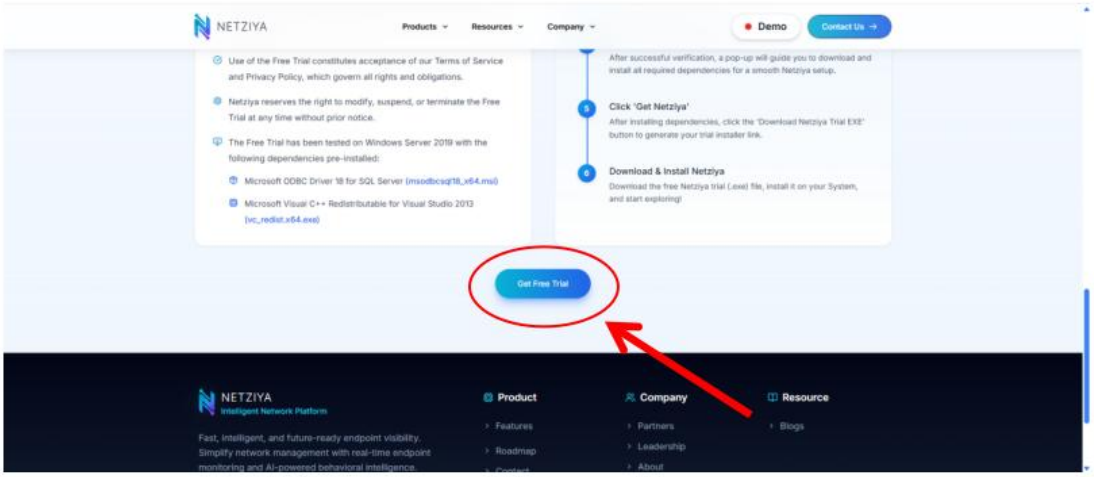

A) Fill the from open

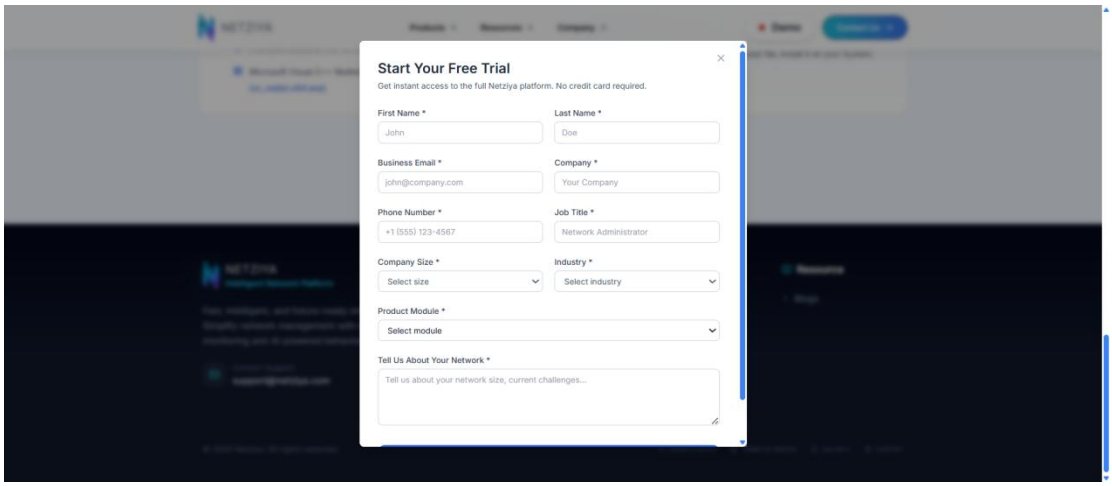


B) On submit on form enter otp (otp send to email filed in form)

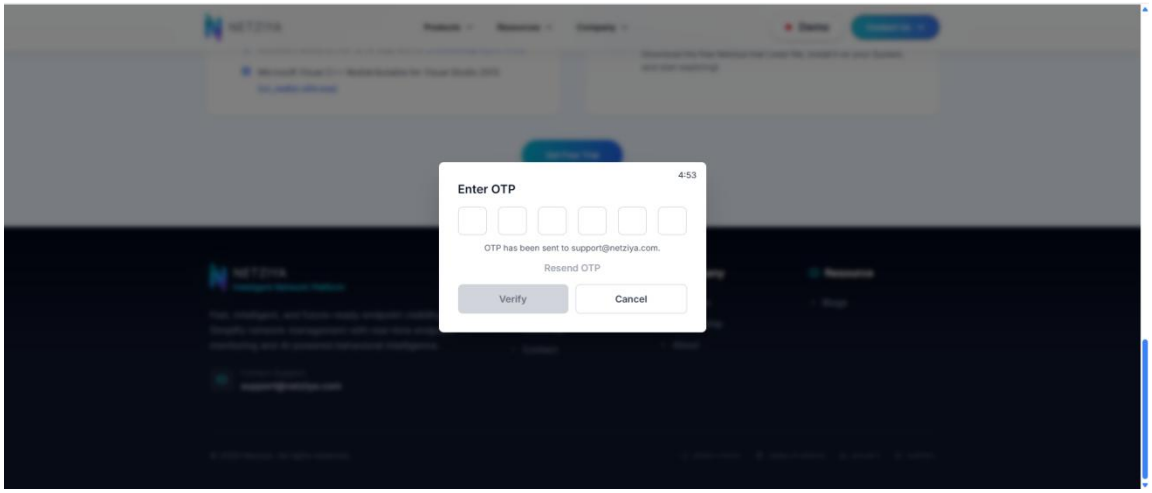


C) Once the OTP is verified, two required installation files will be provided to proceed with the Netziya installation

1. Install odbc driver
2. Install vc++ redistributable

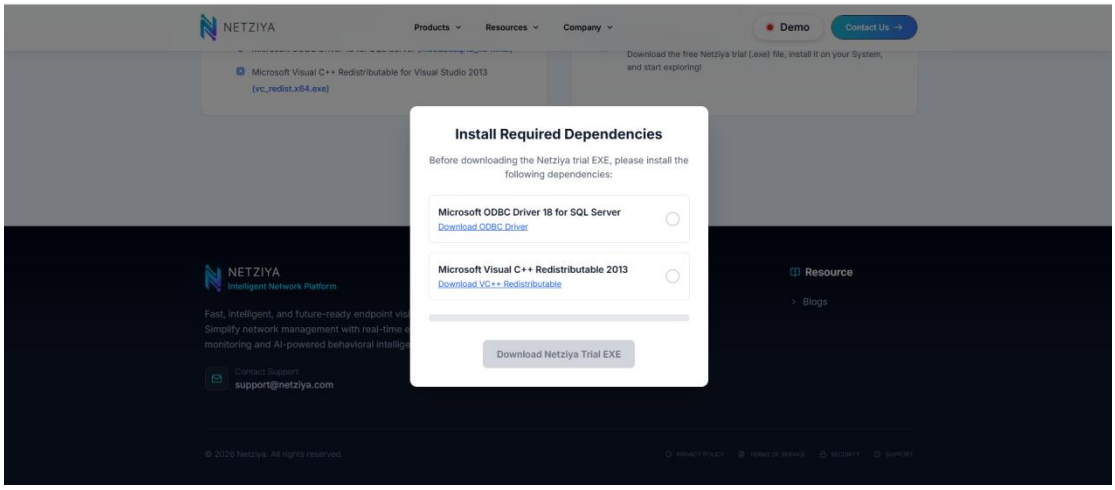

D) After downloading both required dependencies, the Netziya installer (EXE) will become available for download.

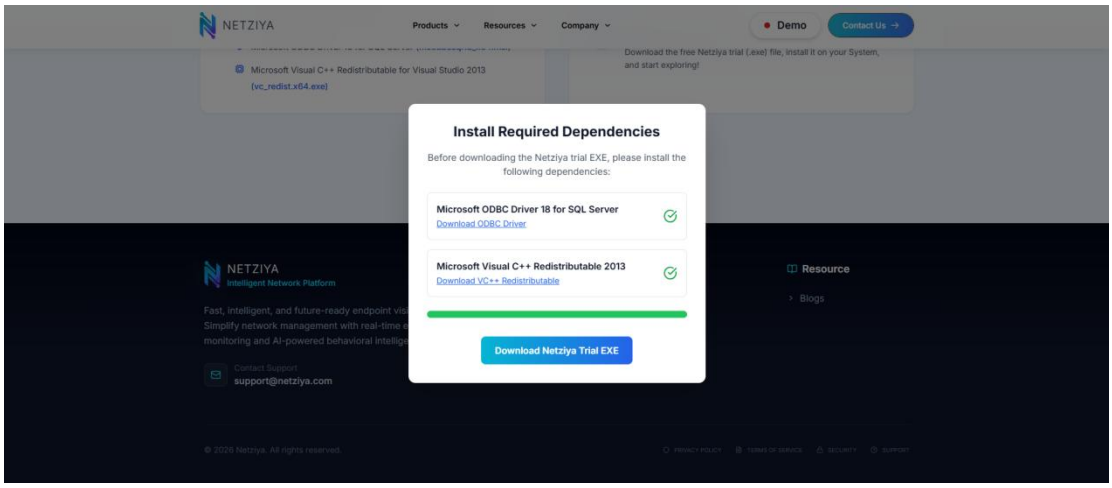


Step 2: Prepare the Target System

- Ensure the system meets the minimum system requirements.
- Select the preferred Windows machine or server where the platform will be installed.
- Confirm administrative privileges are available on the system

Step 3: Run the Installer.


- Launch the downloaded .exe installer on the selected system.
- Follow the on-screen installation wizard.
- Accept the license terms and proceed with installation

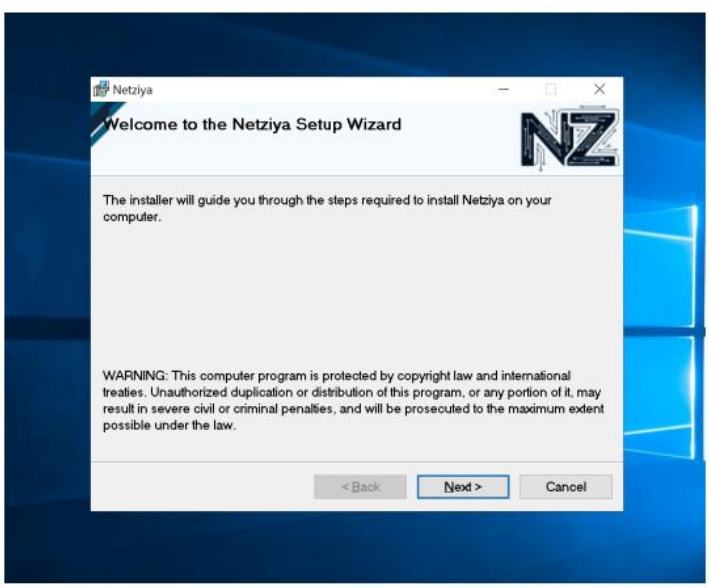



Step 4: Select the installation location for the Netziya application.

- Review and accept the license agreement, then click **Next** to proceed.
- Choose the desired location where the Netziya application will be installed

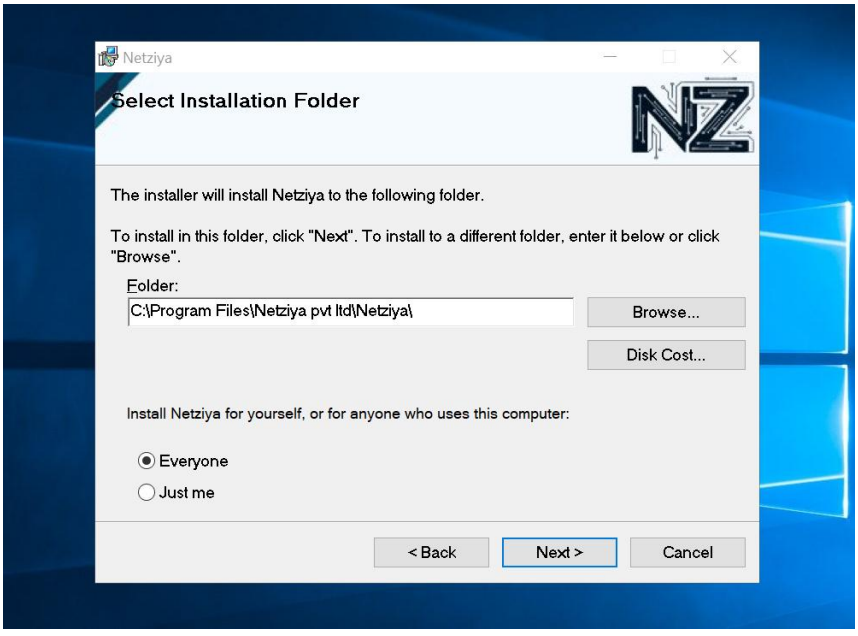


Step 5: Database Selection & Configuration


- During installation, a configuration prompt will appear to select the database type.


Supported database options:

- SQLite – Recommended for lightweight or standalone deployments
- Microsoft SQL Server (MSSQL) – Recommended for enterprise and large-scale environments
- PostgreSQL – Recommended for scalable and performance-oriented deployments

- Select the database type as per your deployment requirement.
- Provide the required database connection details (if applicable).
- Complete the installation process.

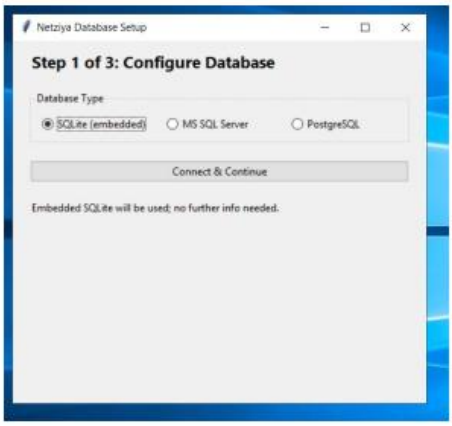

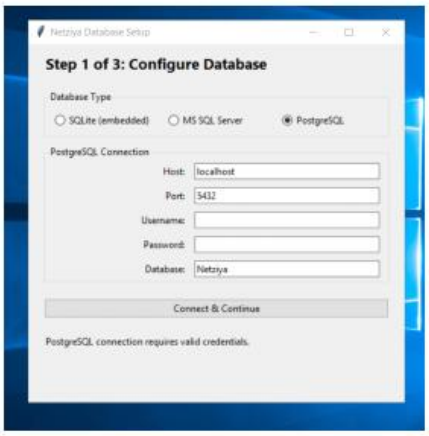

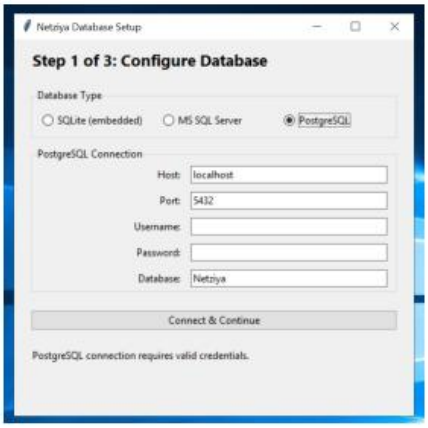

- After successful installation, all required services are automatically initialized
- The platform is now ready for operation.
- No manual service start is required unless explicitly configured.

Step 6: Access the Application


- Open Google Chrome (recommended browser).
- Were appliction installed on such server only
- Enter the ipam/login URL in the browser.
- You will be redirected to the Netziya Login Page.

Step 7: Login to the Platform

- Log in using your Netziya credentials
- Upon successful authentication, you will be redirected to the Home Page.
- The platform is now ready for use.

Installation Completion

- Installation is complete once the Home Page is accessible.
- Users can proceed with configuration, discovery, and monitoring activities.

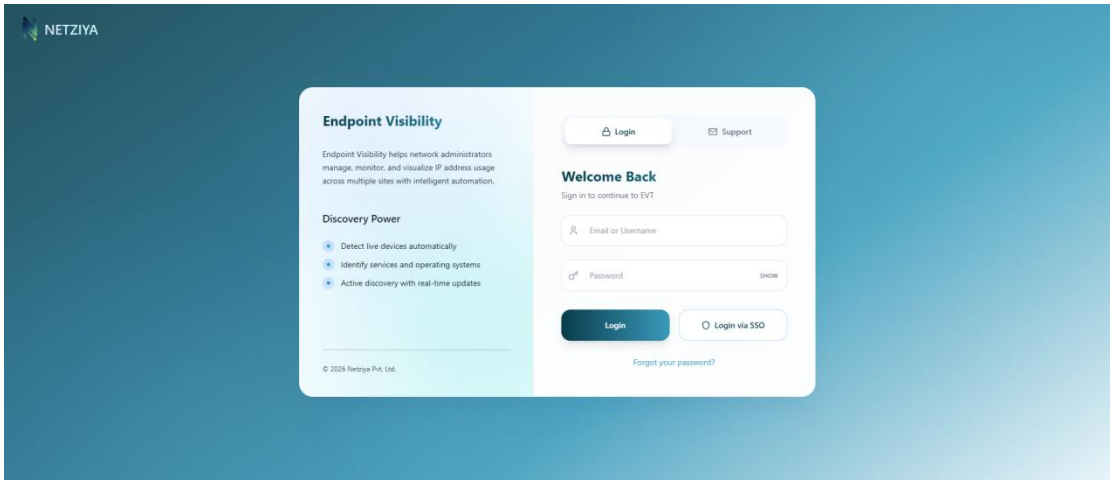


Now on first time user login to home page it start with license creation

ONBOARDING SLIDESHOW CONTENT & BEHAVIOR

Upon the first successful login, Netziya presents an onboarding slideshow on the Home Screen. This slideshow provides a guided introduction to the platform, its capabilities, and the
required next steps before operational use.

The slideshow is designed to auto-play while allowing manual navigation and is intended to familiarize users with Netziya before license activation.

Were it has 6 slide from 1 to 6 slide were on 6th slide it has get started button on clik of it will redirect to licnese page

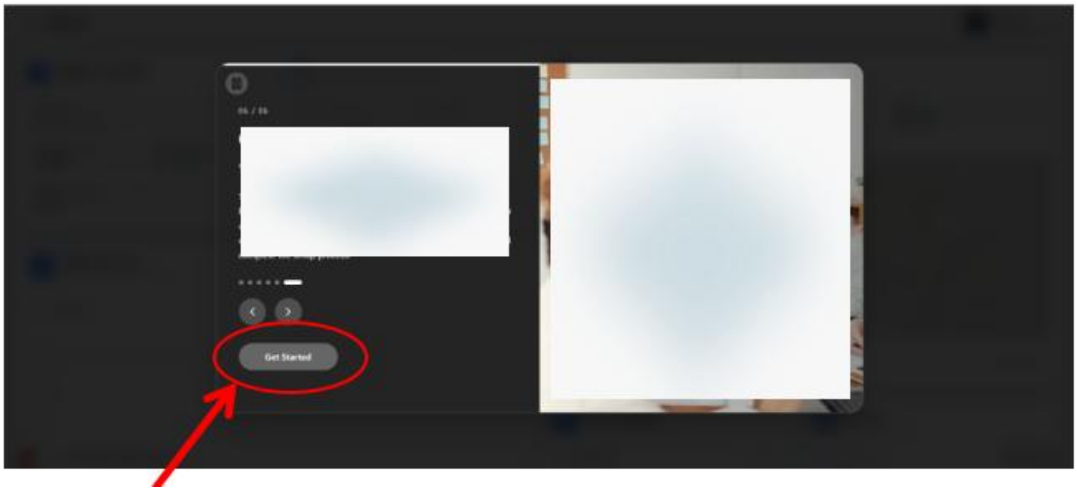

LICENSE MANAGEMENT & ACTIVATION

This section describes the complete license management workflow in Netziya, including adding an existing license, generating a new license, free license behavior, and post-activation actions.

License activation is mandatory before accessing full platform functionality.

License Page Overview

After completing the onboarding slideshow and clicking **Get Started**, the user is redirected to the **License Page**.


On this page, the system displays the following prompt

“Do you want to restore your previous license or start fresh?”

Two action options are provided:

- **Add Existing License**
- **Generate New License**

These options allow users to either activate a previously issued license or request a new one.

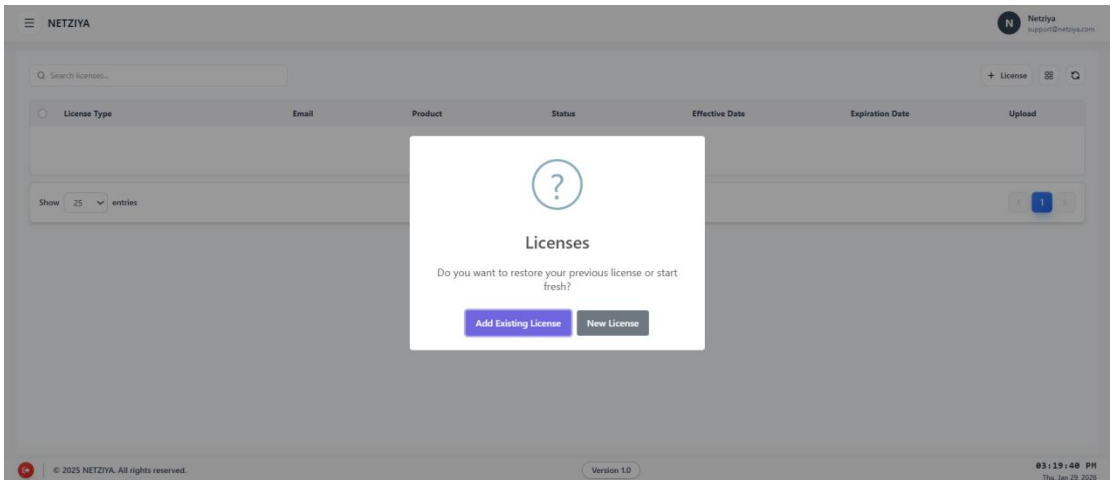


1. Add Existing License Flow


The **Add Existing License** option is intended for users who already possess a valid Netziya license key and license file.

Step 1: Select Add Existing License

- Click **Add Existing License**

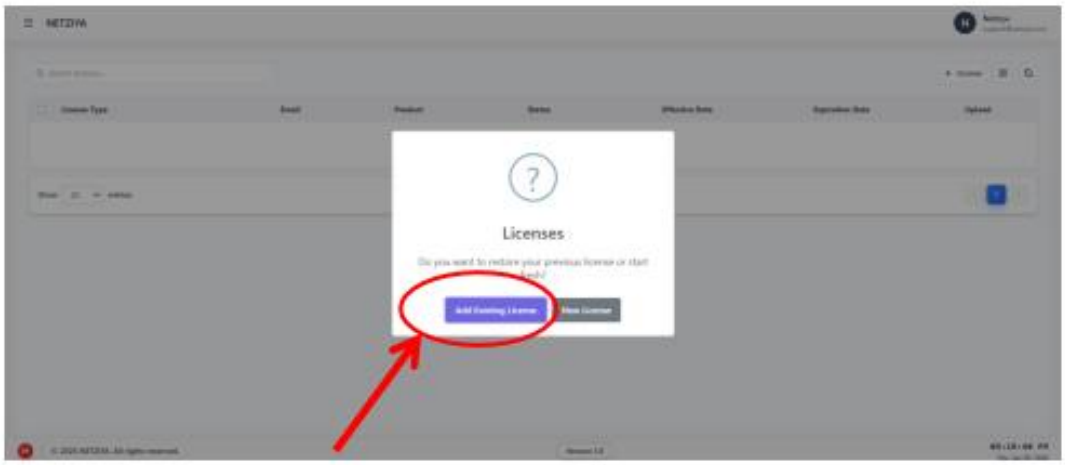

- A license activation form is displayed

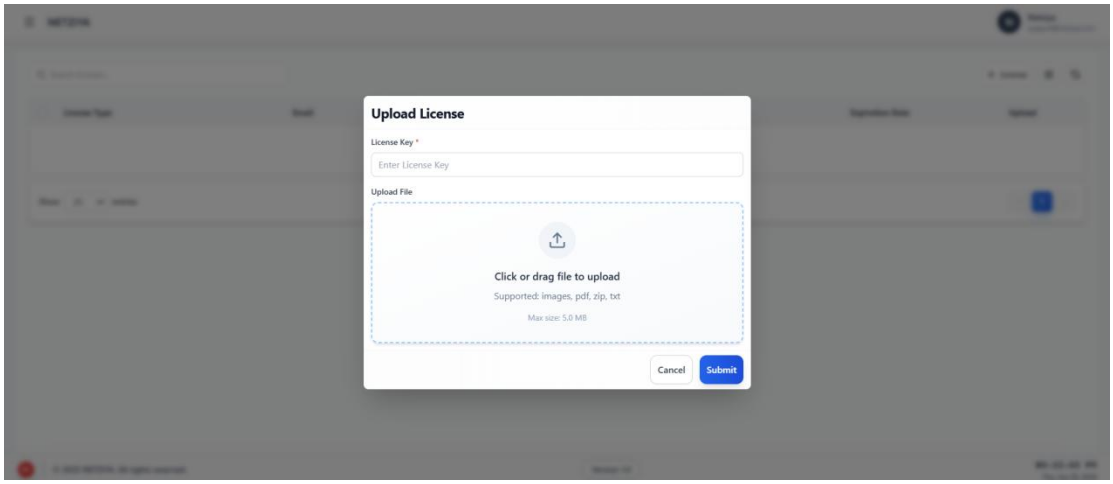

Step 2: Enter License Details

In the license activation form, the user must provide:

- License Key * (Required)
- License File * (Required)


Both fields are mandatory

Step 3: Submit & Validate License

After submitting the form:

- The system validates the license key and file
- If the license is valid:
  - The license is activated **immediately**
  - License status is updated in the system
  - No restart or manual intervention is required

If validation fails, an appropriate error message is displayed and activation is not completed.

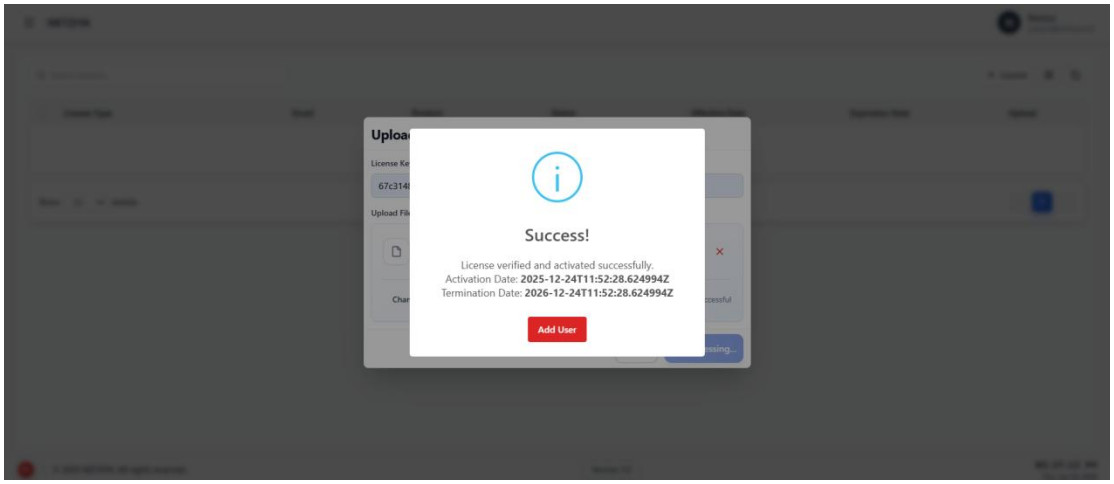


2. Generate New License Flow


The **Generate New License** option is intended for first-time users or users requesting a new license.

Step 1: Open License Generation Form

When **Generate New License** is selected

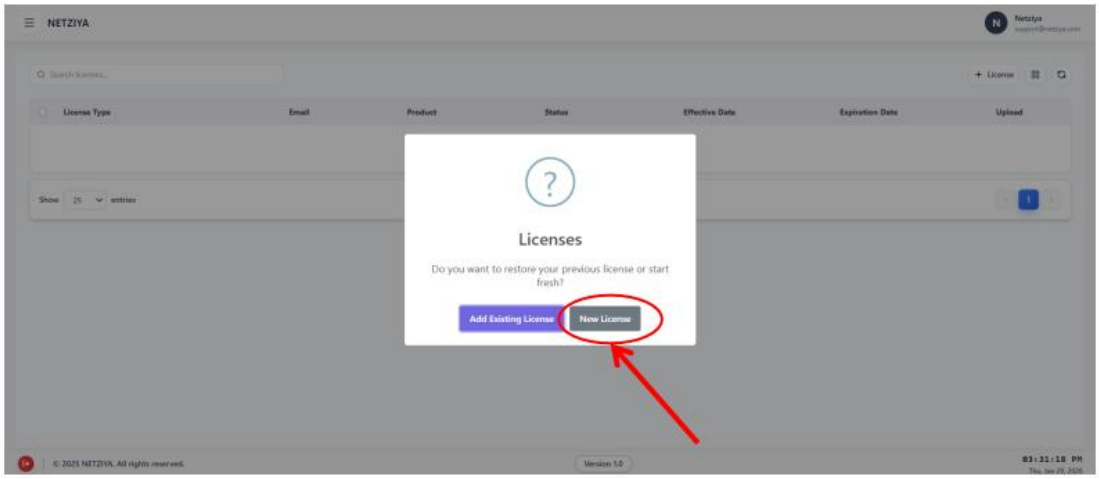

A license generation form is displayed

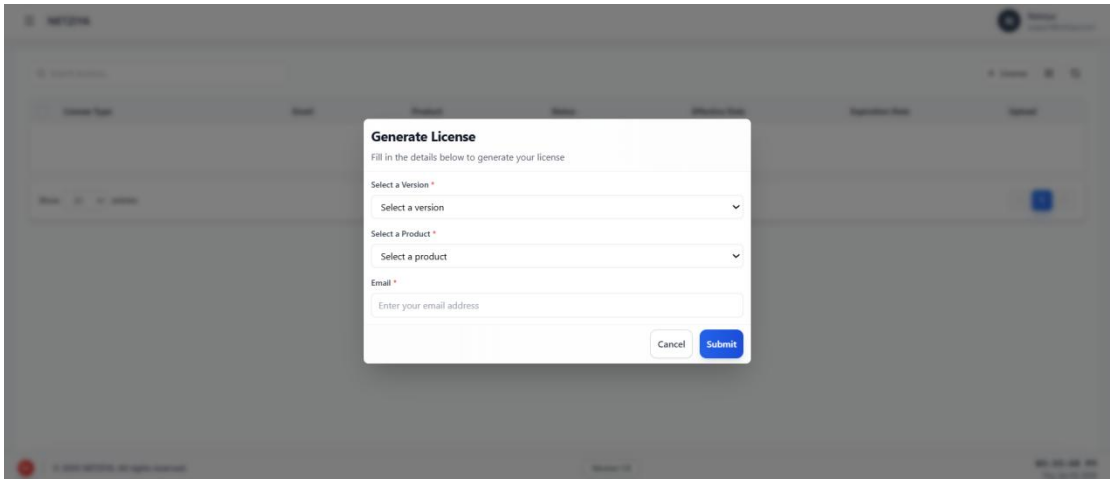

The user must enter the following details:

- **Version Type** (Free or Standard) * (Required)
- **Product Selection** * (Required)
- **Email Address** * (Required)

All fields are required to proceed.


Step 2: Submit License Request


<u>If user go with standard version</u>

After submitting the form:

- A **license request file** is generated automatically
- The file is downloaded to the user's system
- The user's default **email client opens automatically**

The user must attach the downloaded license request file

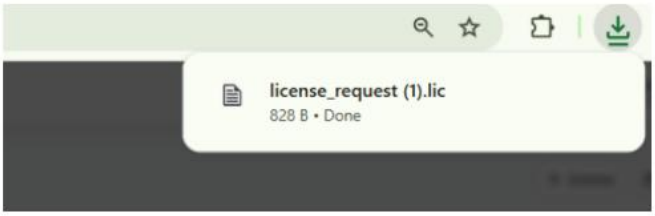

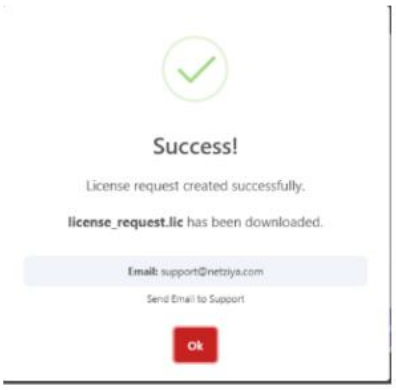

- Send the email to **support@netziya.com**
- The email address should match the one entered in the form

License Issuance

- The Netziya support team validates the request
- A **license key** and **license file** are generated
- License details are sent to the user via email

Expected turnaround time: within **24 hours**




Client_License_e17189b9-6acd-4fa6-af2f-c48c3ea6ebfd.lic


Step 4: Activate Received License

After receiving the license key and license file from the Netziya support team

- Navigate back to the **License Management Page**
- In the **License Table section**, locate the **Upload icon**

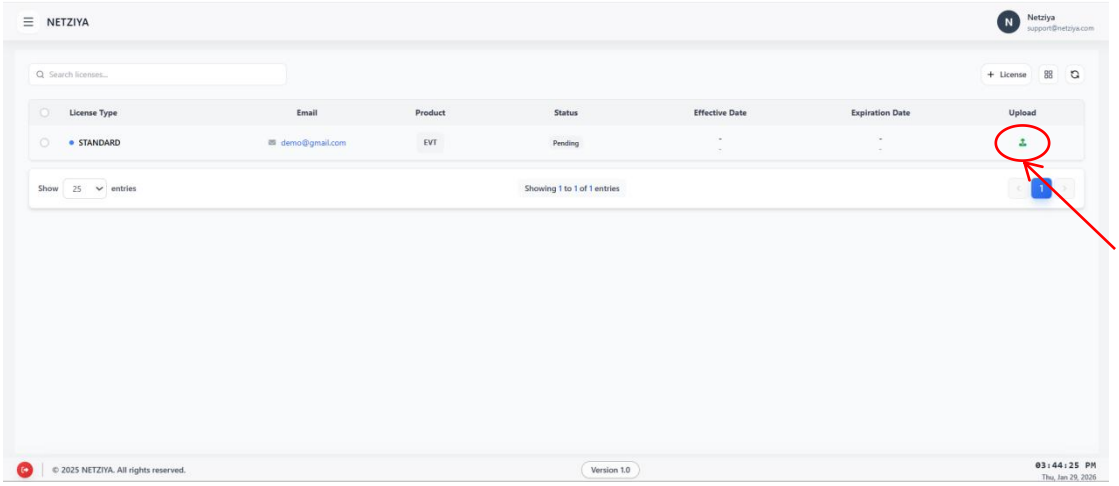

- Click the **Upload icon** to open the **License Upload Form**

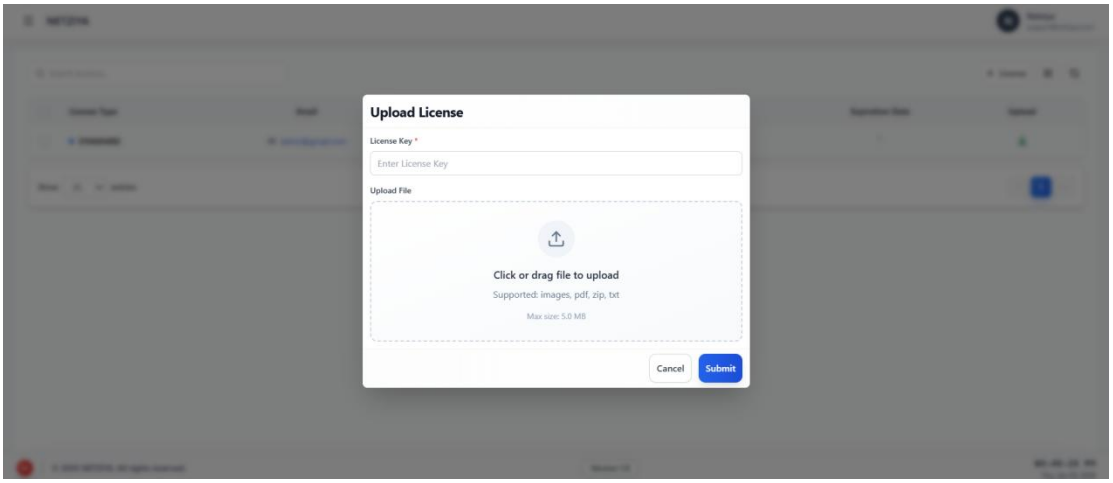

In the license upload form:

- Enter the **received License Key**
- Upload the **received License File**

- Submit the form

If the submitted license key and file are valid:

- The license is **validated and activated immediately**
- License status is updated in the license table
- No system restart or manual intervention is required

Free Version License Behavior

When **Free Version** is selected during license generation:

The user selects:

- Version Type: **Free**
- Product
- Email Address

No manual interaction with the support team is required

After submission:


- The free license is **activated automatically**
- The license validity period is **1 month**
- Feature access may be limited based on free-tier restrictions

After expiration, the user must generate or add a Standard license to continue using the platform.

Post-License Activation Action

After **successful activation of any license** (Free or Standard):

- The system displays a confirmation alert prompting the user to **add users**

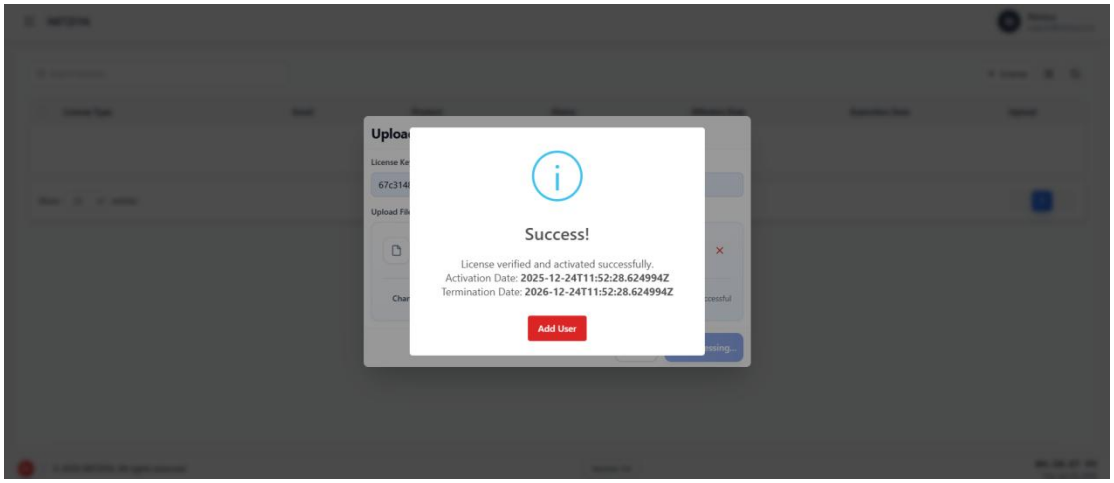

- On click of **Add User**
- The user is redirected to the **Administration Page**

This marks the transition from licensing to platform configuration and access control.

ADMINISTRATION INITIAL SETUP FLOW

This section describes the mandatory administrative setup process that occurs after successful license activation. This flow ensures secure ownership transfer from the default system account to a customer-defined administrator account.

Redirection to Administration Page

After successful license activation (Free or Standard):

- The system automatically redirects first time user to the **Administration Page**
- A system popup is displayed prompting the user to initialize administrative credentials

This process is mandatory and must be completed before normal platform usage.

Root User Credential Initialization

The root user represents the system-level administrative account created during installation. For security reasons, the default root credentials must be reset during first-time setup.

Step 1: Initialize Root User Credentials


Upon redirection to the Administration page:

- A popup titled **Initialize Root User** is displayed
- The username is pre-filled as *Netziya*

- The user is required to:
  - Set a **new password** for the root user

Actions available:

- **Submit** – applies the new password
- **Cancel** – exits the process (platform access remains restricted)

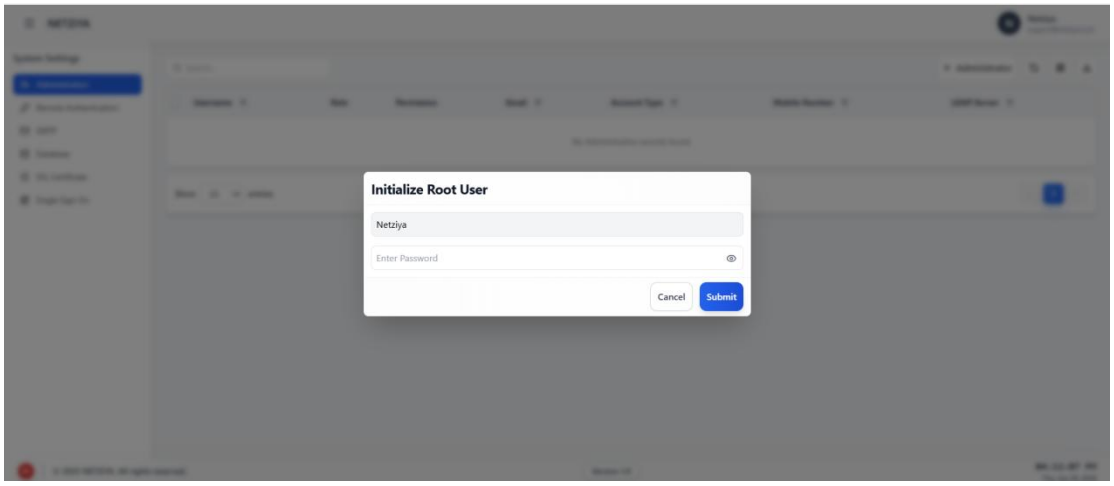

Step 2: Submit Root Password Reset

After entering the new password and clicking **Submit**:

- The root user password is updated successfully
- The system immediately proceeds to the next administrative step
- No manual logout is required at this stage

After root credential initialization, the platform enforces the creation of a **Software Administrator** account.


This account is intended for daily operational use and should be used instead of the root user.

Step 3: Open Add Administrator Form

- A form titled **Add Administrator** is displayed automatically
- This form captures the primary administrator details for the platform

Step 4: Enter Administrator Details

The user must provide the following information:

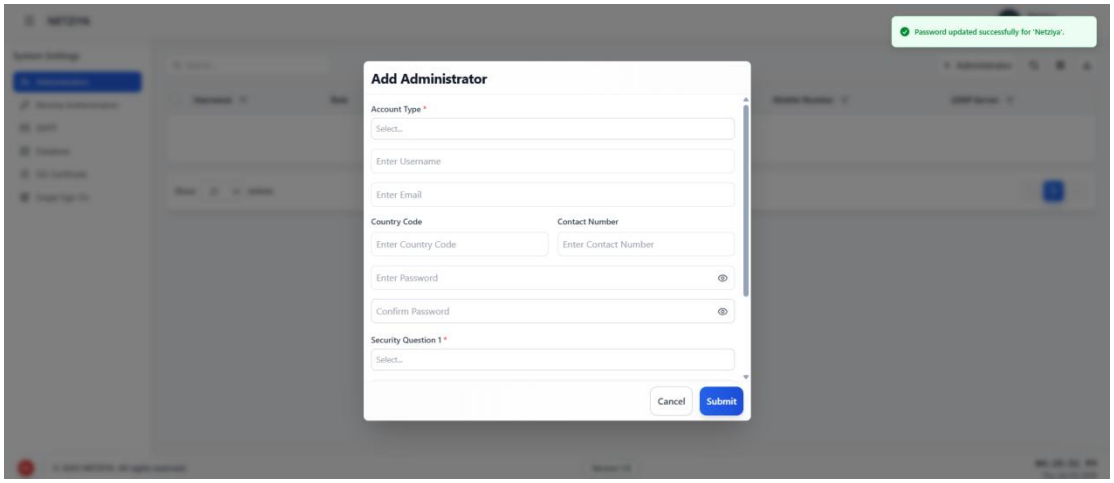

Account Information

- Account Type (local account) * (Required)
- Username * (Required)
- Email Address * (Required)

Contact Information

- Country Code * (Required)
- Contact Number * (Required)

Authentication Details

- Password * (Required)
- Confirm Password * (Required)

Security Configuration

- Security Question 1 and Answer * (Required)
- Security Question 2 and Answer * (Required)

All mandatory fields must be completed to proceed.

Step 5: Create Software Administrator

After completing the form:

- Click **Submit**
- The system validates the entered details

If validation is successful:

- The **Software Administrator account is created**
- A success confirmation popup is displayed


Confirmation & Automatic Logout

After successful administrator creation, the system displays a confirmation message:

“Software Admin added successfully. Please sign in with your Software Admin credentials.”

Automatic Logout

- Upon clicking **OK** on the success message

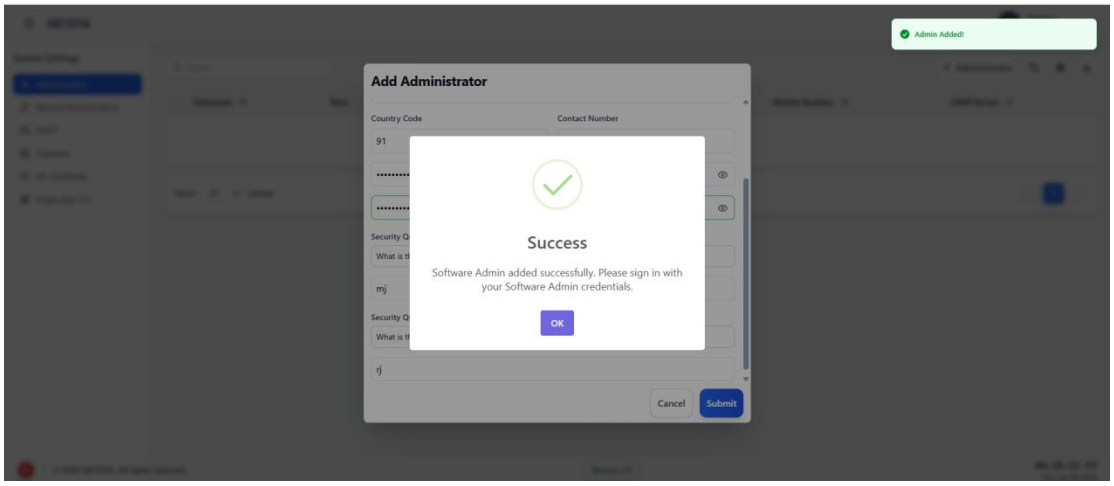

- The user is **automatically logged out**
- The current session is terminated securely

This ensures that the platform is accessed only through the newly created Software Administrator account.

Login with Software Administrator

After logout:

- The user logs in using the **Software Administrator credentials**
- Full access to the platform is granted based on assigned administrative privileges

The user can now:

- Add additional users
- Configure roles and permissions
- Perform asset discovery
- Access all licensed modules and tools

CONFIGURATION LAYER


The **Configuration Layer** allows administrators to configure system-wide settings that control authentication, communication, data storage, integrations, and security behavior across the Netziya platform.

This layer is accessible only to authorized administrative users and is critical for stable, secure, and compliant operation of the system.


Accessing the Configuration Layer

From the left-hand sidebar:

- Click **on Systemt Setting**

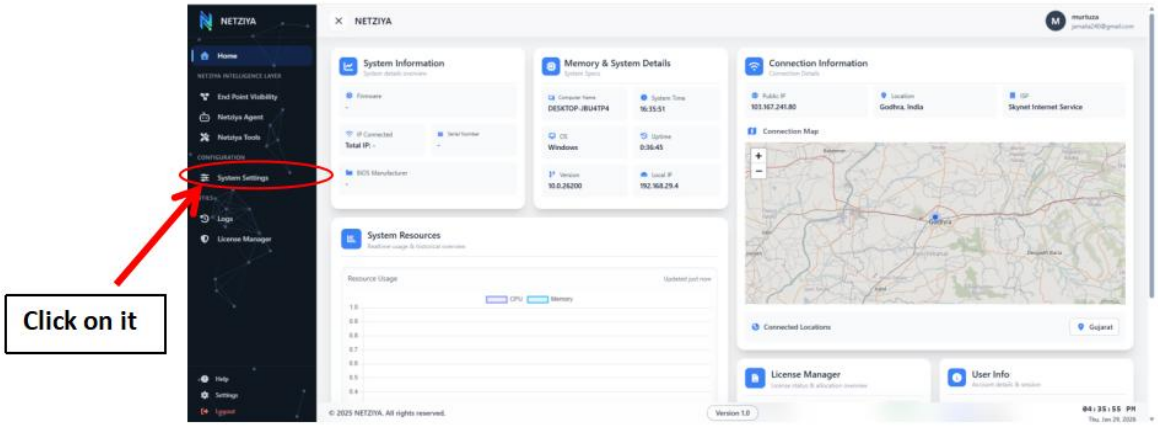

- The system opens the **Systemt Setting Page**
- A list of configuration modules is displayed on the left panel

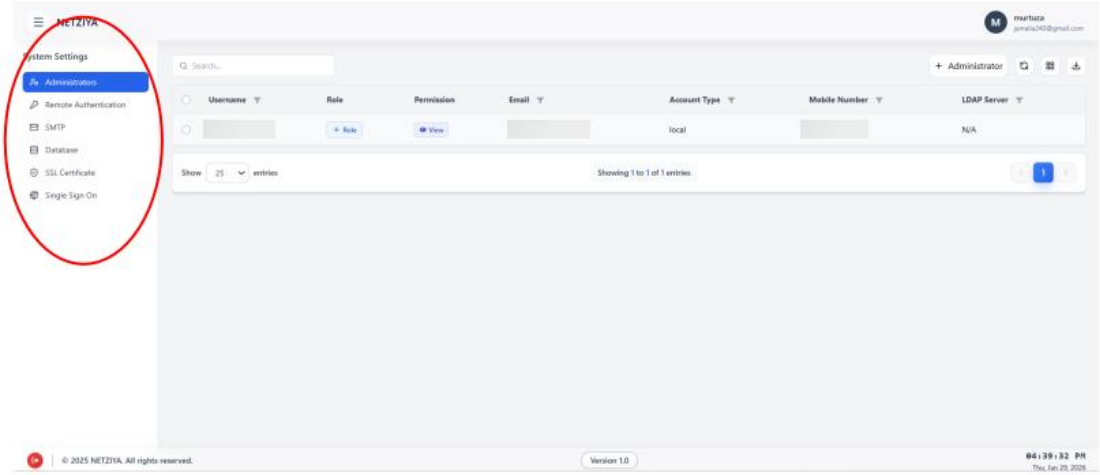

- Each configuration module controls a specific aspect of platform behavior.

Configuration Modules Overview

The Configuration Layer includes the following modules:

1. **Administrators**
2. **Remote Authentication**
3. **SMTP**
4. **Database**
5. **SSL Certificate**
6. **Single Sign-On (SSO)**

1. Administrators

The **Administrators** module is used to manage user accounts with administrative access to the Netziya platform.

Key Capabilities

- View all existing administrator accounts
- Add new administrators
- Assign roles and permissions
- View account type (Local / LDAP/SSO)
- Manage contact and authentication metadata

Typical Use Cases

- Creating additional admins for operations or security teams
- Reviewing role assignments
- Managing local and directory-based users


Note:- By default, the **Administrators** module is active when the Configuration layer is opened.

Administrators – Add New User, Roles & Permissions


Accessing the Add Administrator Form

To add a new administrator:

- Navigate to **Systemt Setting → Administrators**
- Click the **Add Administrator** button (top-right)

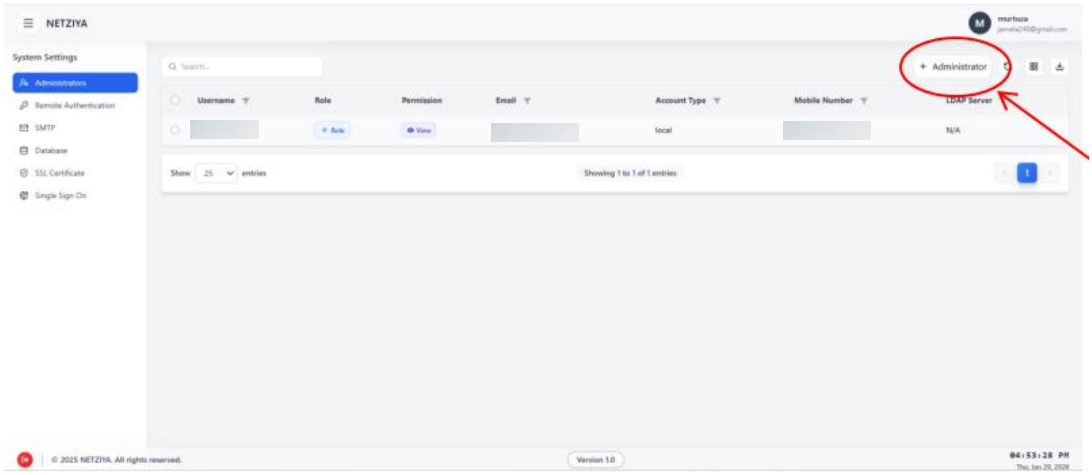

- An **Add Administrator** popup form is displayed

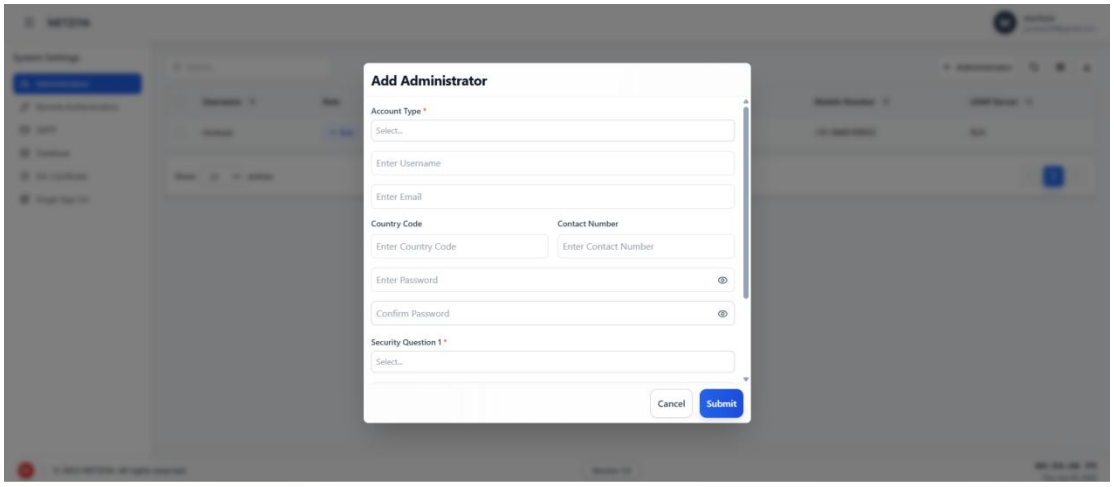

Filling the Add Administrator Form

The administrator creation form requires the following details:

Account Information

- Account Type (LOCAL/LDAP/SSO) * (Required)
- Username * (Required)
- Email Address * (Required)

Contact Information

- Country Code * (Required)
- Contact Number * (Required)

Authentication Details (note:- if local account)

- Password * (Required)
- Confirm Password * (Required)

Security Configuration (note:- if local account)

- Security Question 1 and Answer * (Required)
- Security Question 2 and Answer * (Required)

All mandatory fields must be completed.

Default Administrator Created During Setup

During initial platform setup:

- The **first administrator** is created automatically

This user is assigned:


- **Role:** Software Admin
- **Permissions:** Read & Write

This administrator has full operational access to the platform for day-to-day usage


Role Assignment & Permission Configuration

To assign or modify a role:

In the Administrators table, click **Role** for a user

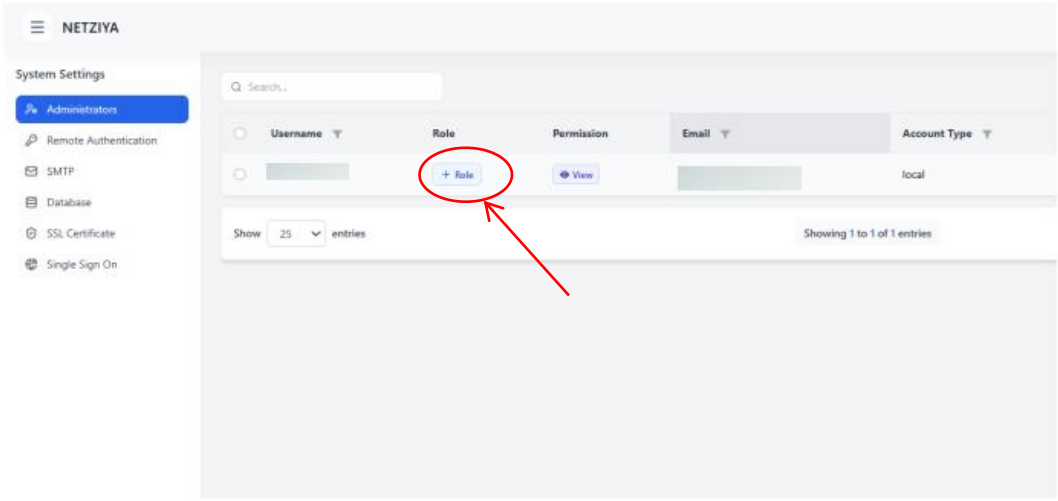

- A **Manage Role** popup opens

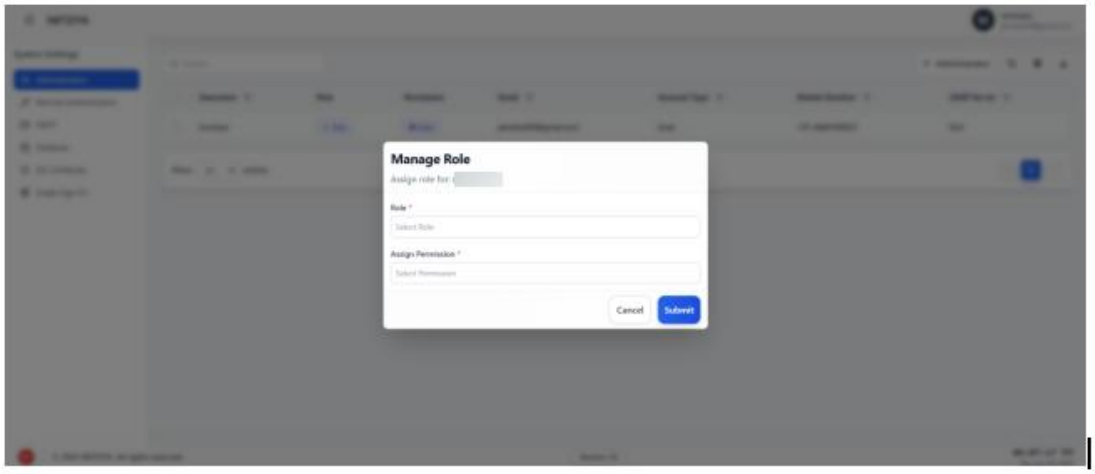

- Select: **Role**
- **Permission Level**

Click **Submit**

Netziya supports the following hierarchical roles:

Role	Scope of Access
Super Admin	Full access across organization, sites, subnets, IPs, history
Org Admin	Full access to assigned organization, its sites, subnets, IPs
Site Admin	Access to specific site, its subnets and IPs
Subnet Admin	Access to specific subnet and its IPs
IP Admin	Access only to assigned IP and its history

Permission Levels

Each role can be assigned one of the following permissions:

Read

- View data only
- No ability to modify, add, or delete

Write

- View, add, edit, and manage data within assigned scope
- **Super Admin** supports both Read and Write permissions and has unrestricted access.

Role Hierarchy & User Creation Rights

User creation is **hierarchy-based** and restricted by scope.


Role	**Can Create Users Of**
Super Admin	All roles
Org Admin	Site Admin, Subnet Admin, IP Admin (within own org scope)
Site Admin	Subnet Admin, IP Admin (within assigned site)
Subnet Admin	IP Admin (within assigned subnet)

Multiple Roles & Permissions

- A user may be assigned **multiple roles**
- Each role may apply to different scopes (Org, Site, Subnet, IP)
- Effective permissions are calculated based on assigned roles


Viewing Assigned Roles & Permissions

- Click the **View** button in the Permission column

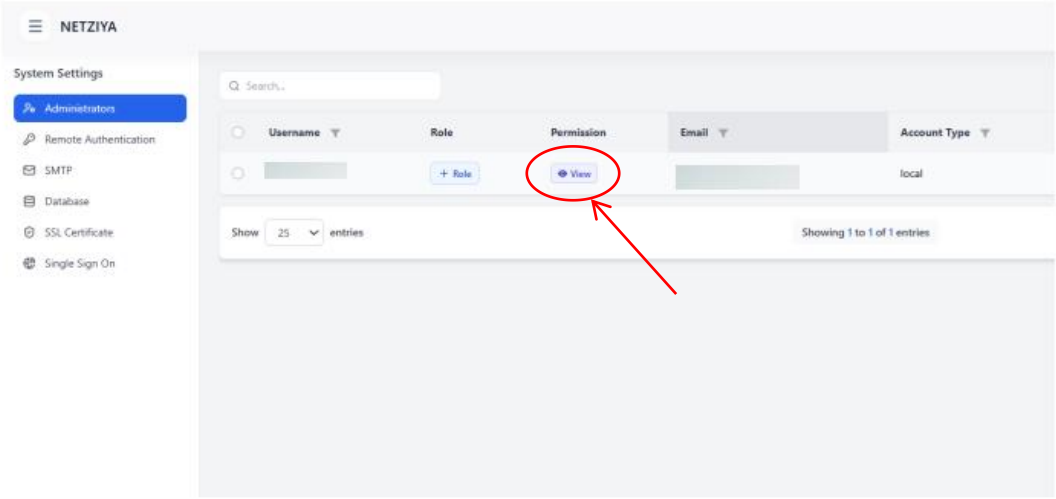


A popup displays:

- Assigned roles
- Organization, site, subnet, and IP scope
- Permission level (Read / Write)
- Assigned roles
- Organization, site, subnet, and IP scope
- Permission level (Read / Write)

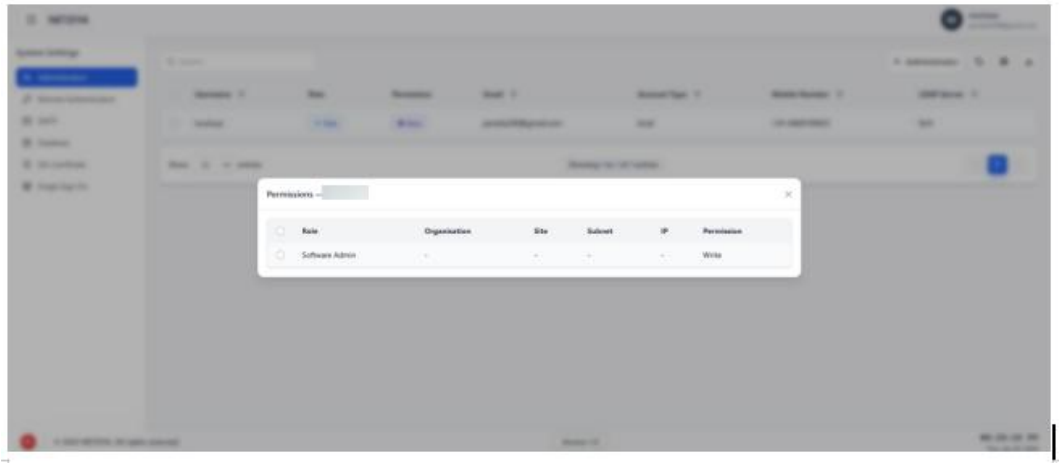

Edit Administrator or Role


- Select a user using the checkbox
- Click the **Edit (pencil) icon**
- The edit form opens
- Modify details as permitted by role hierarchy
- Submit changes

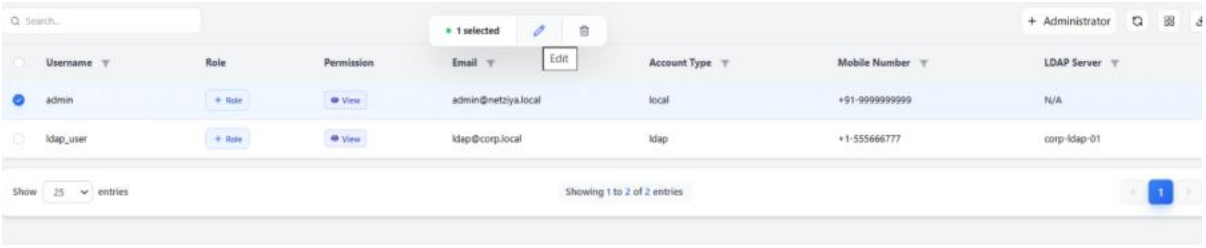

Edits are applied immediately after validation.

Deleting Administrators & Roles

- Select one or more users using checkboxes

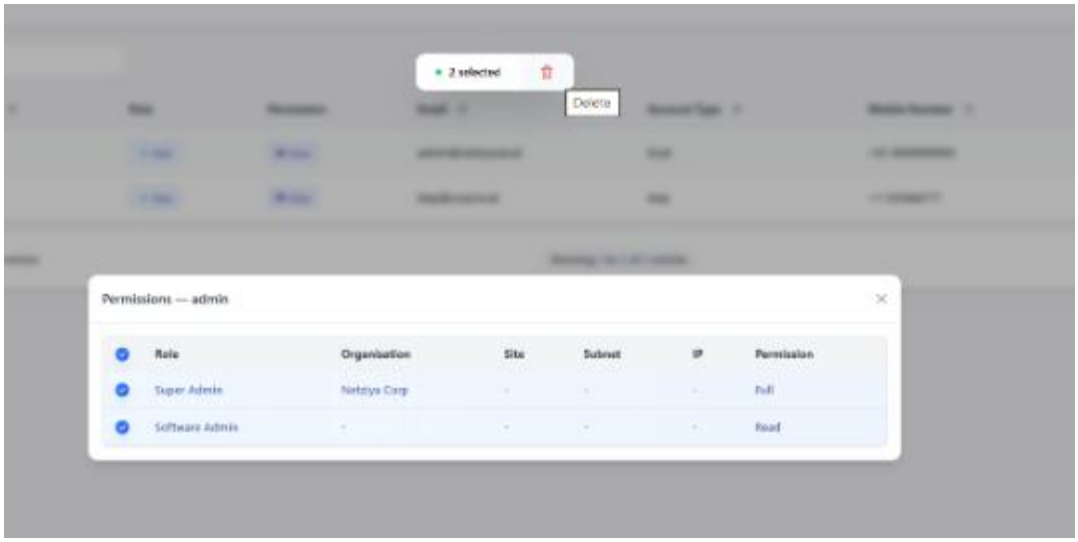

- A popup action bar appears
- Click the **Delete (trash) icon**
- Confirm deletion

Remote Authentication – LDAP Configuration


The **Remote Authentication** module allows Netziya to integrate with external directory services using **LDAP**, enabling centralized user authentication and directory-based administrator management.

This module simplifies user management by allowing administrators to create users directly from LDAP servers instead of maintaining local credentials.

Accessing Remote Authentication

To open the Remote Authentication module:


- Navigate to **Configuration** from the sidebar
- Click **Remote Authentication**
- The **LDAP** configuration page opens by default

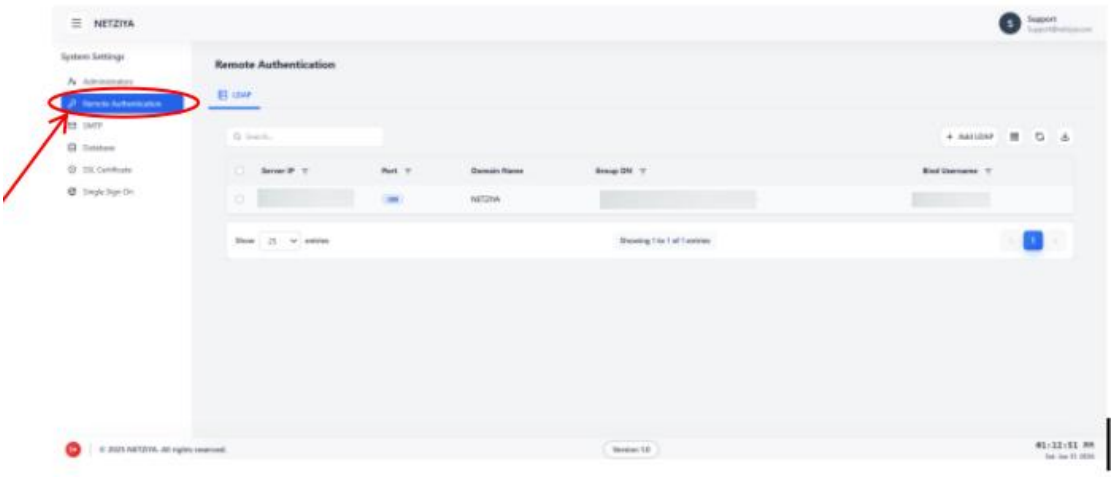

LDAP Configuration Page Overview

The LDAP configuration page contains:

- Search bar for LDAP entries
- **Add LDAP** button

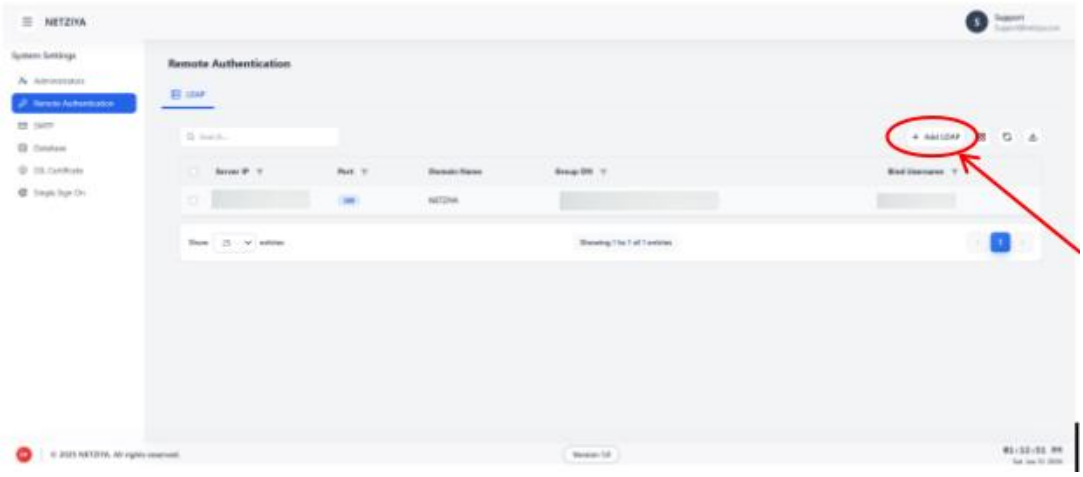


- LDAP server table
- Utility actions (Refresh, Manage Columns, Export)

Initially, the table may display **“No LDAP servers configured”**.

Step 1: Open Add LDAP Form

- Click **Add LDAP**
- The **Add LDAP Server** popup form open

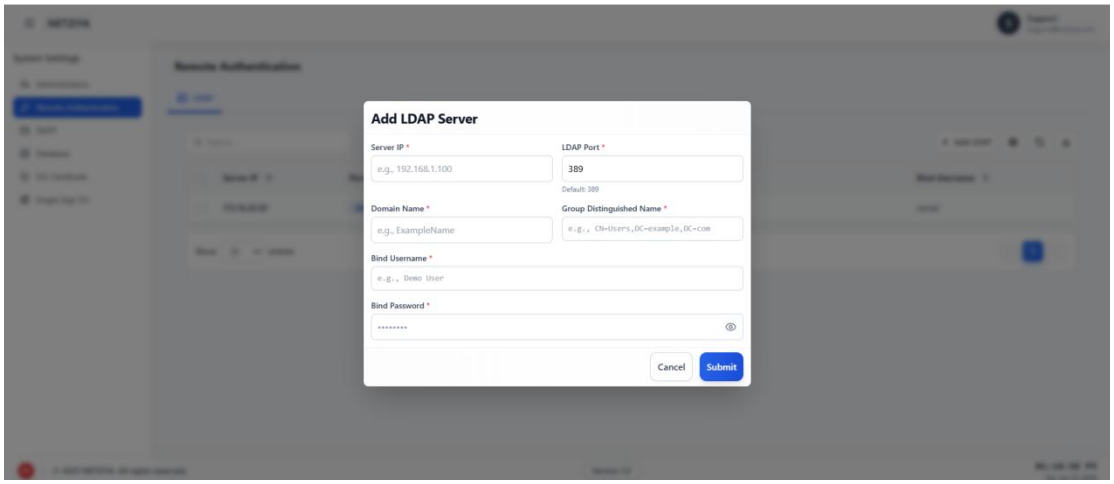

Step 2: Enter LDAP Server Details

The following fields are required:

Server Information

- **Server IP**
  Example: 192.168.1.100

- **LDAP Port**
  Default: 389
  secure LDAP (LDAPS): 636

Directory Details

- **Domain Name**
  Example: corp.demo.local

- **Group Distinguished Name (DN)**
  Example:
  CN=Admins,OU=Groups,DC=corp,DC=demo,DC=local

Bind Credentials

- **Bind Username**
- **Bind Password**

These credentials are used to authenticate and query the LDAP directory.

Step 3: Submit LDAP Configuration

- Click **Submit**
- The system validates the LDAP connection and credentials
- If validation is successful:
- The LDAP server is added
- The entry appears immediately in the LDAP table

Managing LDAP Server Entries


Edit LDAP Server

- Select an LDAP entry using the checkbox
- Click the **Edit (pencil) icon**
- Update required fields
- Submit changes

Edits are applied immediately after validation.

Delete LDAP Server

- Select one or more LDAP entries using checkboxes
- A bulk action bar appears
- Click the **Delete (trash) icon**
- Confirm deletion

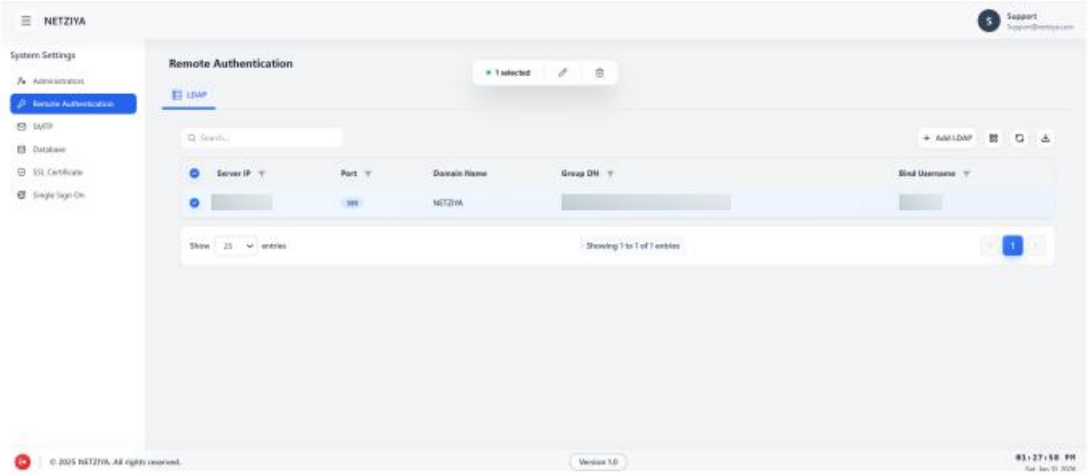


Creating Administrators Using LDAP

Once at least one LDAP server is configured, administrators can create users directly from LDAP.

Add Administrator via LDAP

1. Navigate to **Configuration → Administrators**
2. Click **Add Administrator**
3. In **Account Type**, select **Create via LDAP**

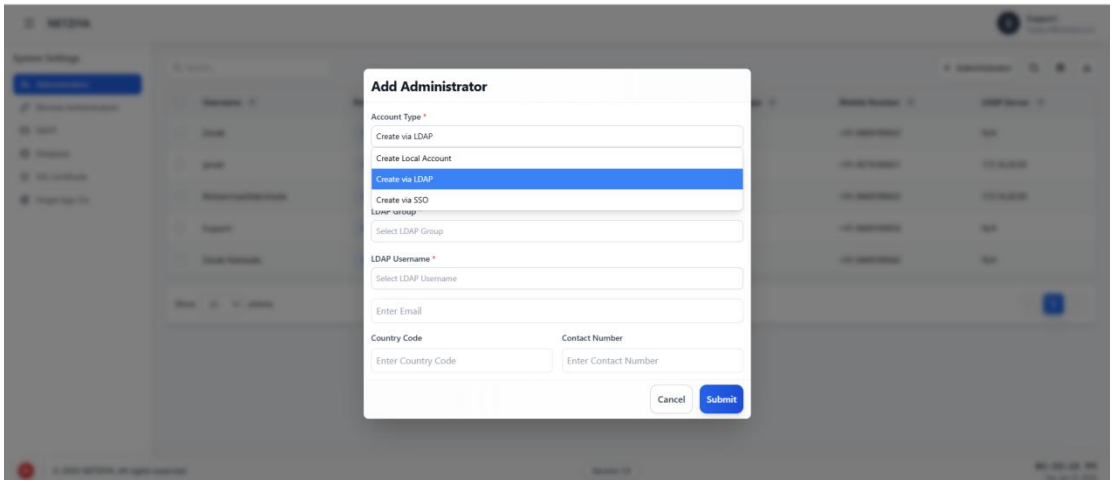

LDAP User Creation Fields

When LDAP account type is selected, the form displays:

- **LDAP Server** – select configured server
- **LDAP Group** – select available group
- **LDAP Username** – select directory user
- **Email Address**
- **Country Code**
- **Contact Number**

Passwords are not required, as authentication is handled by LDAP.

Submit LDAP Administrator

- Click **Submit**
- The system validates LDAP mapping
- If successful:
- The LDAP-based administrator is created
- The user appears in the Administrators table
- Account Type is shown as **LDAP**

LDAP users authenticate using directory credentials, not local passwords

LDAP Authentication Behavior

- LDAP users log in using their directory credentials
- Password policies are enforced by the LDAP server
- Role and permission enforcement is handled by Netziya
- LDAP authentication does not bypass role-based access control

SMTP Configuration

The **SMTP Configuration** module enables outbound email communication from the Netziya platform. SMTP is required for sending user credentials, system notifications, scheduled reports, and alert emails.


Once configured successfully, SMTP services are used across multiple platform modules.

Accessing SMTP Settings

To open the SMTP configuration page:

- Navigate to **Configuration** from the sidebar
- Click **SMTP**
- The **SMTP Settings** page opens


If no SMTP server is configured, the table displays **“No SMTP settings found”**.

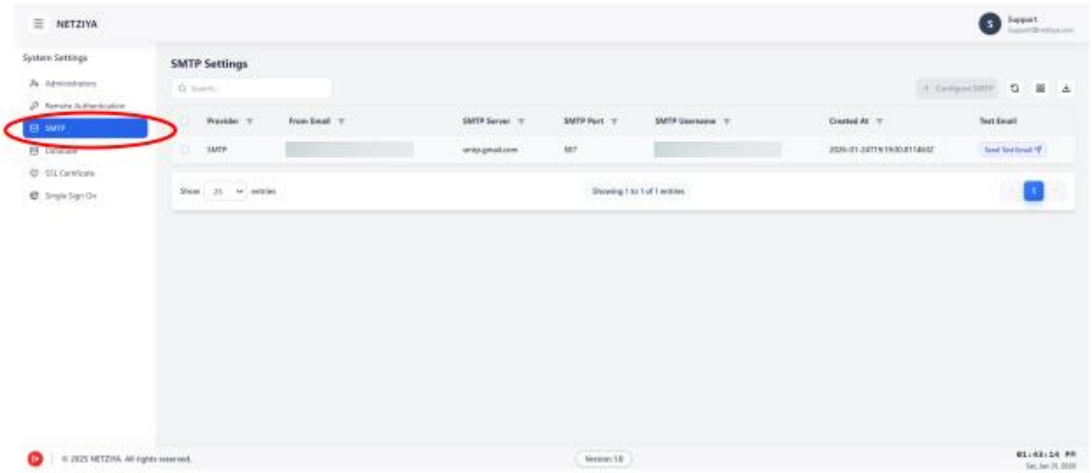

The SMTP page includes:

- Search bar
- **Configure SMTP / Add SMTP** button
- SMTP configuration table
- Utility actions:
- Refresh
- Manage Columns
- Export

Only **one SMTP provider configuration** is allowed at a time.

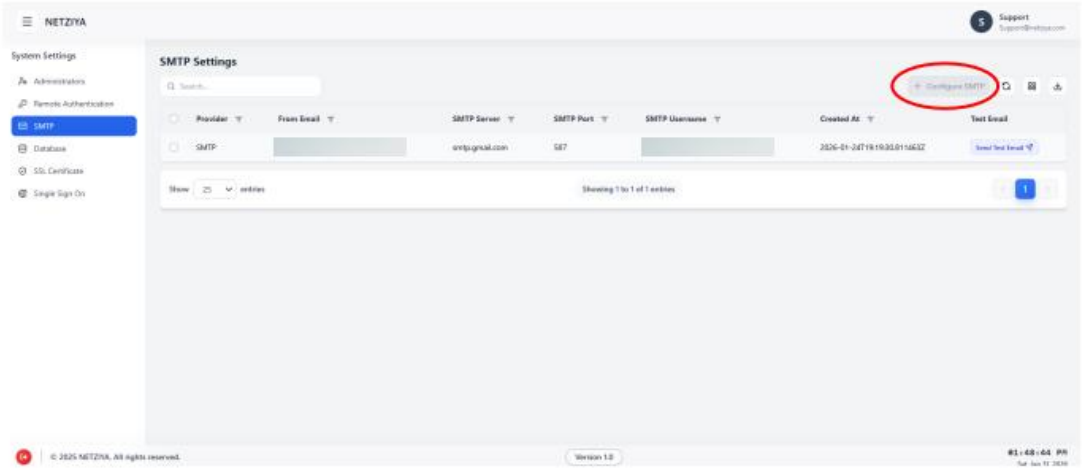


Step 2: Select SMTP Provider

In the **Provider** field, select one of the supported providers:

- **Office365 / External SMTP**
- **Internal SMTP**
- **SendGrid**

The form dynamically changes based on the selected provider.

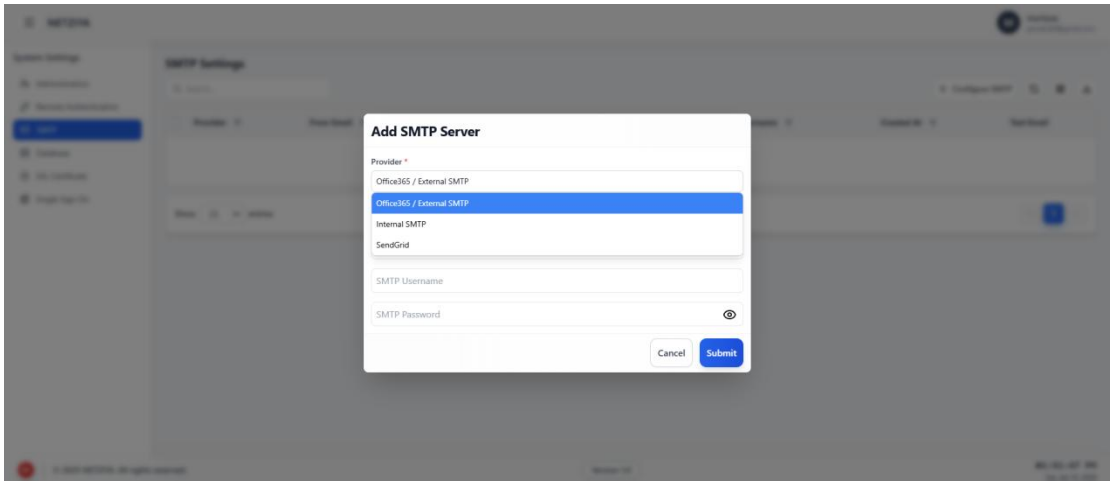


Provider-Specific Configuration

Office365 / External SMTP

When **Office365 / External SMTP** is selected, the following fields are required:

- **SMTP Server**
- **SMTP Port**
- **SMTP Username**
- **SMTP Password**

This option is commonly used for Microsoft 365, Google Workspace, or other external SMTP services.

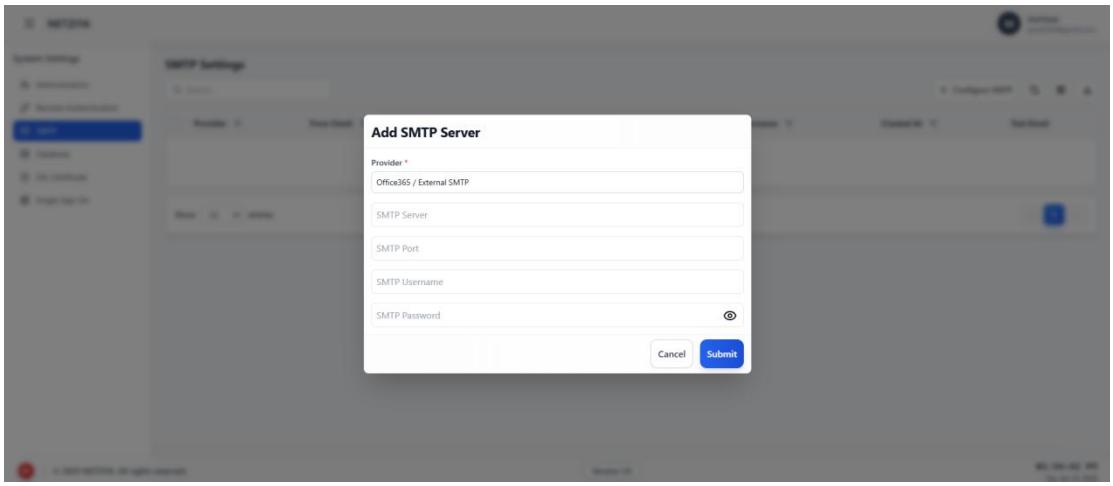

Internal SMTP

When **Internal SMTP** is selected:

- **SMTP Server**
- **SMTP Port**


Optional

Enable Authentication

If enabled, the following fields appear:

- SMTP Username
- SMTP Password

This option is typically used for on-premise or relay-based mail servers.

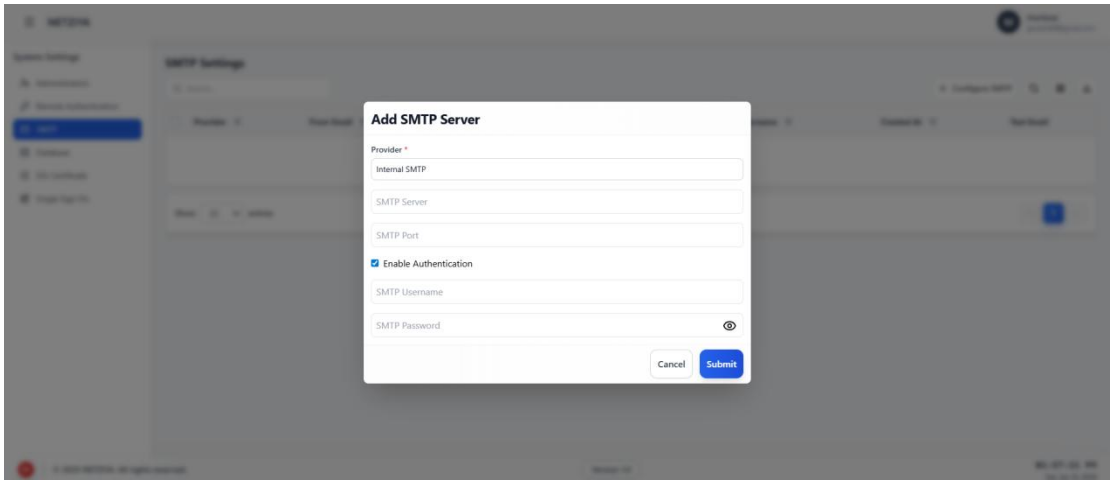


SendGrid

When **SendGrid** is selected:

- **From Email**
- **SendGrid API Key**

No SMTP server or port is required, as authentication is handled using the API key.

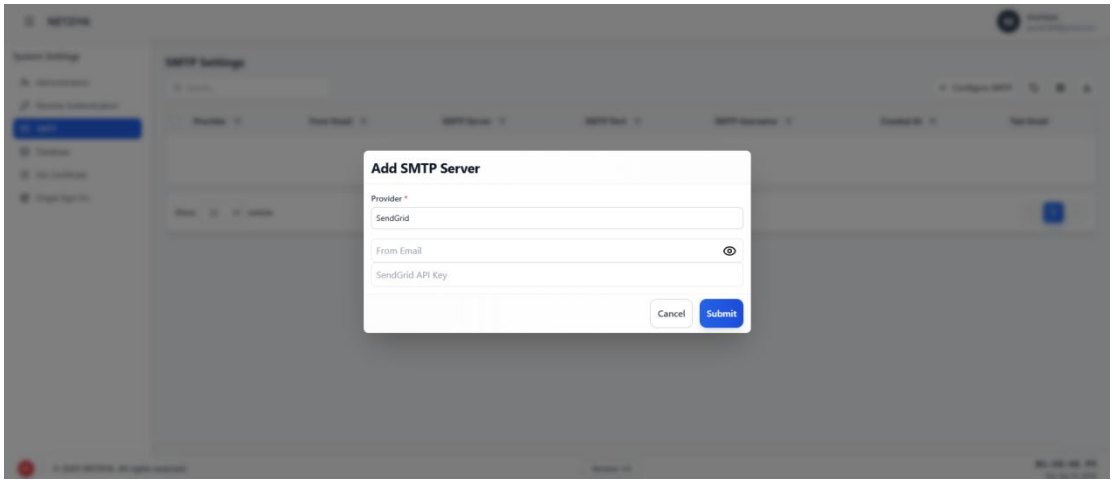

Step 3: Submit SMTP Configuration

- Click **Submit**
- The system validates the SMTP configuration

If validation is successful:


- The SMTP configuration is saved
- The entry appears in the SMTP table
- Email services are activated immediately

Only one provider configuration can exist at a time. Adding a new provider replaces the existing configuration.

SMTP Configuration Table

Once configured, the SMTP table displays:

- Provider
- From Email
- SMTP Server
- SMTP Port
- SMTP Username
- Created Date
- **Test Email** action

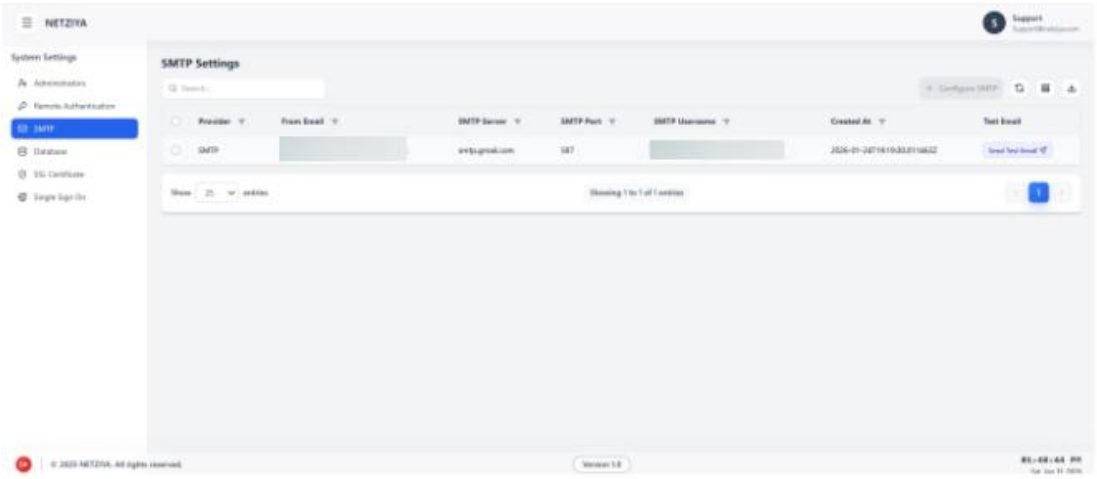


Test Email Functionality

Each SMTP configuration includes a **Test Email** option.

Sending a Test Email

- Click **Test Email** in the SMTP table
- The system sends a test message using the configured SMTP provider
- Successful delivery confirms:
- Server connectivity
- Authentication validity
- Email routing

This is recommended immediately after configuration.

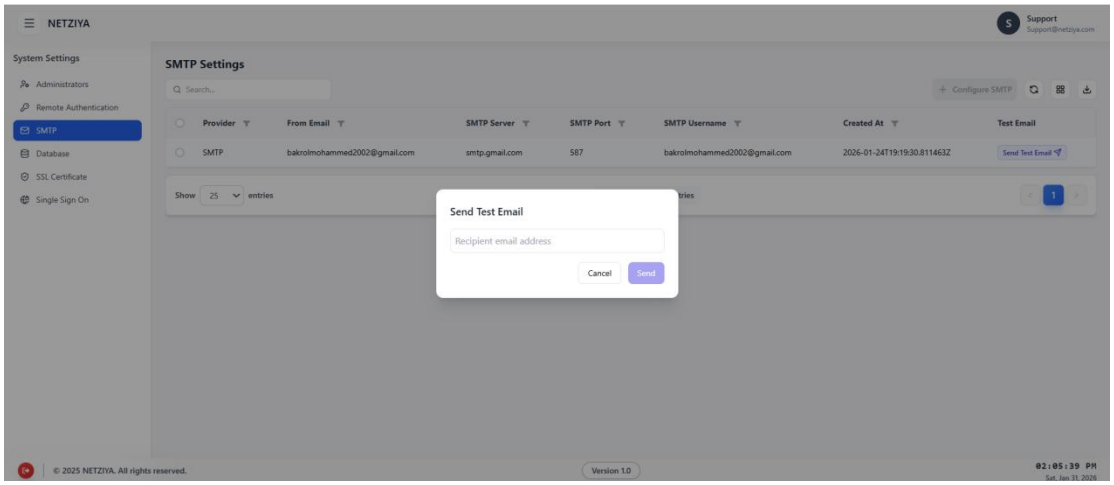

Edit SMTP Configuration

- Select the SMTP entry using the checkbox
- Click the **Edit (pencil) icon**
- Update configuration details
- Submit changes

Changes take effect immediately.

Delete SMTP Configuration

- Select the SMTP entry using the checkbox
- Click the **Delete (trash) icon**
- Confirm deletion

Deleting SMTP disables all email-based features until a new configuration is added.

Platform Features Enabled by SMTP

Once SMTP is configured successfully, the following features become active:

User Management

- New user credential emails are sent automatically
- Administrator notifications are enabled

Endpoint Visibility

- Scheduled reports are emailed automatically
- Endpoint-level alerts are delivered

Network Alerts


- Organization-level alerts
- Site-level alerts
- Subnet-level alerts
- IP-level alerts

SMTP is a **mandatory dependency** for all email-based notifications and reporting features more other

SSL Certificate Configuration

The **SSL Certificate** module allows administrators to generate Certificate Signing Requests (CSR), upload signed SSL certificates, and apply secure HTTPS communication for the Netziya platform.

This module is used to secure browser access to the application and is a critical component for security and compliance

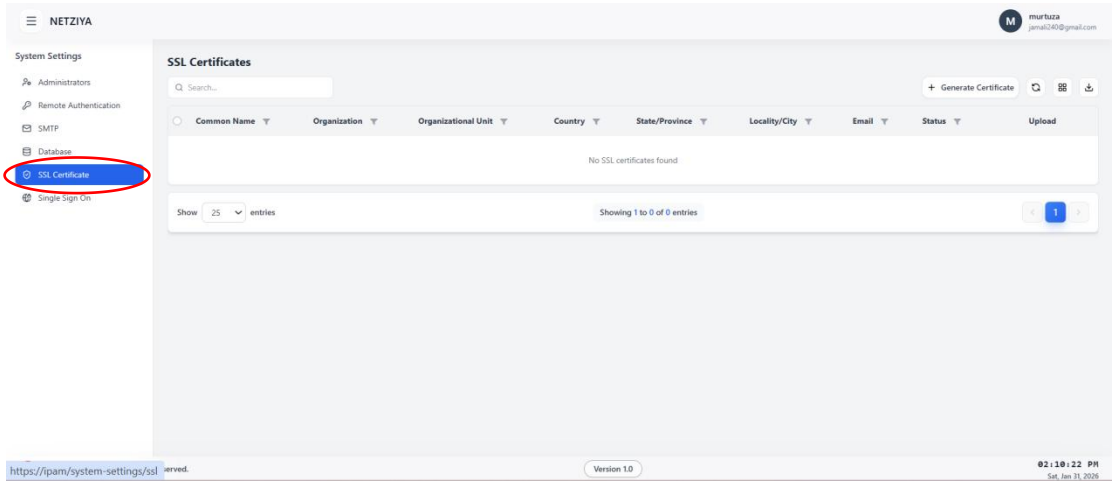

Accessing SSL Certificate Settings

To open the SSL Certificate configuration page:

- Navigate to **Configuration** from the sidebar
- Click **SSL Certificate**

The **SSL Certificates** page opens

If no certificates are configured, the table displays **“No SSL certificates found”**.

The SSL Certificate page includes:

- Search bar

Generate Certificate button
- SSL certificate table

Utility actions:
- Refresh
- Manage Columns
- Export

Generate CSR (Certificate Signing Request)


Step 1: Open Generate CSR Form

To add a new SSL certificate:

- Click **Generate Certificate**
- The **Generate CSR** popup form opens

Step 2: Fill CSR Details

The following details must be entered:

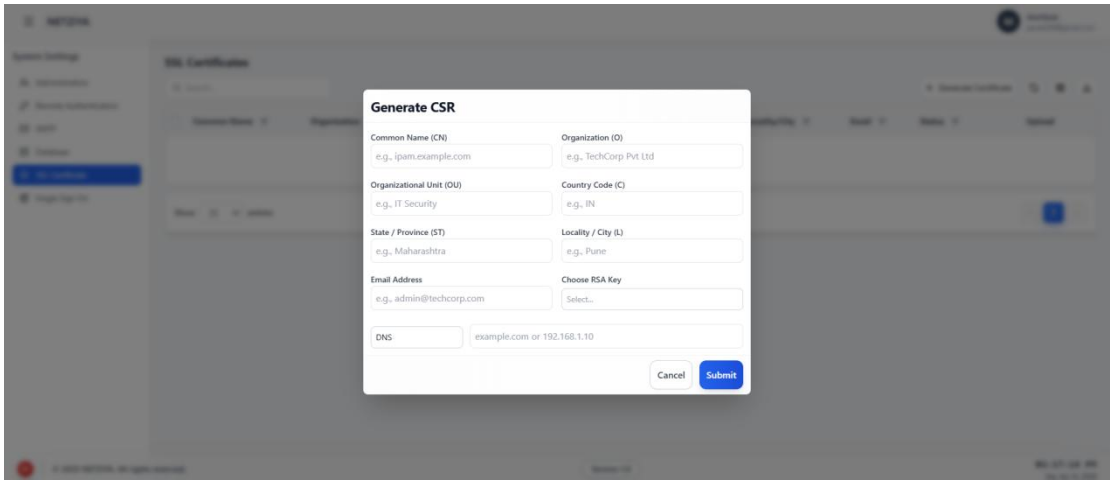

- Certificate Identity
- Common Name (CN) (Domain name or IP, e.g. ipam.example.com)
- Organization (O)
- Organizational Unit (OU)
- Location Details
- Country Code (C) (e.g. IN)
- State / Province (ST)
- Locality / City (L)
- Contact & Security
- Email Address
- RSA Key Size (e.g. 2048 / 4096)
- Subject Alternative Name (SAN)
- DNS name or IP address (if required)


Step 3: Submit CSR Request

- Click **Submit**
- The system generates a CSR
- A new entry appears in the SSL certificate table
- Certificate status is shown as **Pending**

Download CSR File

After CSR generation:


- Locate the certificate entry in the table
- In the **Upload** column, click the **Blue Download icon**
- The **CSR file (.csr)** is downloaded to your system

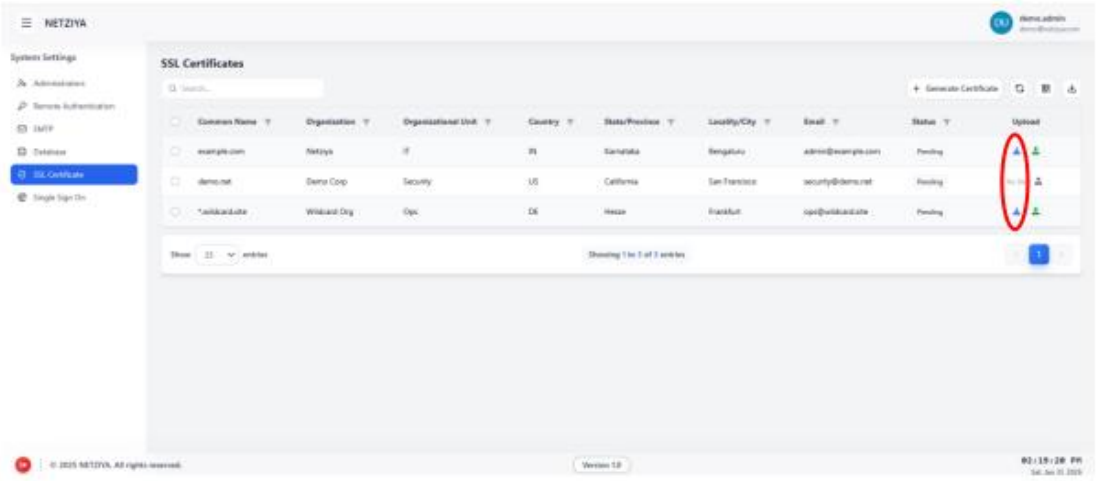

Submit CSR to Certificate Authority

After downloading the CSR file:

- Upload the CSR file to your SSL certificate issuer (e.g. internal CA or public certificate authority)
- Complete domain/organization validation as required
- The certificate authority provides a **signed/encrypted certificate file**

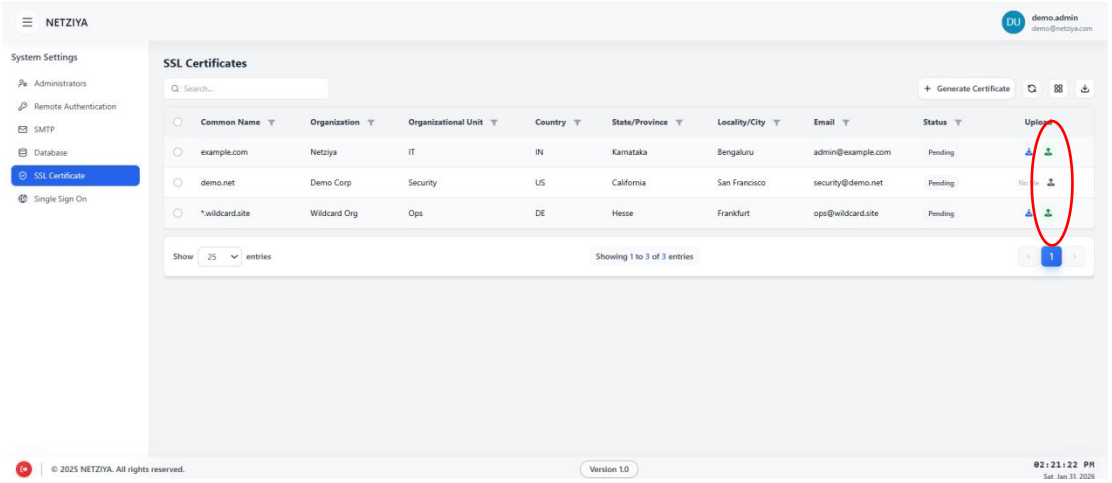


Upload Signed Certificate

Step 4: Open Upload Certificate Form

Once the signed certificate is received:

- Return to the **SSL Certificate** page
- In the **Upload** column, click the **Green Upload icon**
- The **Upload Certificate** popup opens

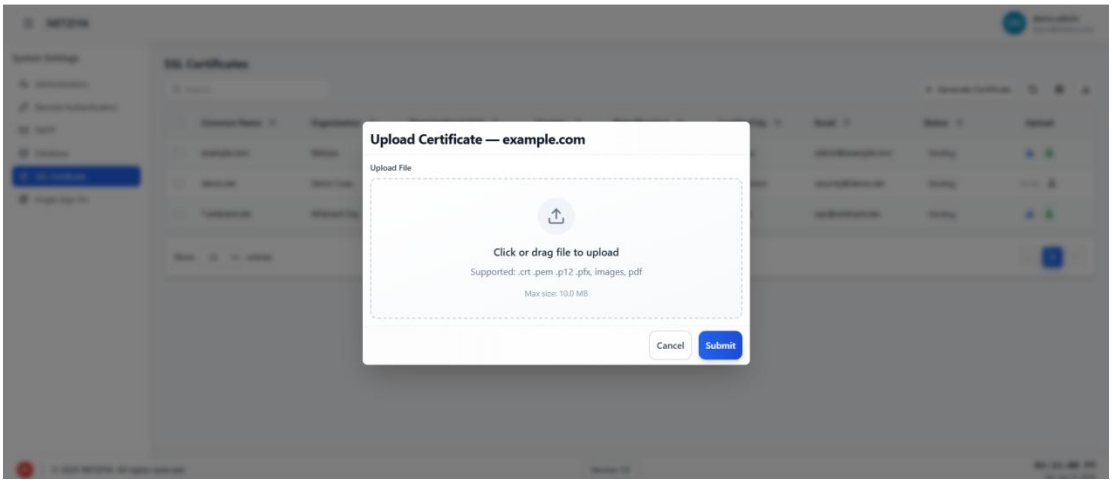

Step 5: Upload Certificate File

Upload the signed certificate file
Supported formats:

- .crt
- .pem
- .p12
- .pfx

Maximum file size: **10 MB**

Click **Submit** to apply the certificate.

Certificate Application & System Restart

After successful upload:


- The SSL certificate is applied to the system
- In some cases, the certificate is applied **automatically**

Best practice: Restart the Netziya system to ensure:

- Complete certificate activation
- Proper HTTPS binding
- Avoidance of browser caching issues

Edit Certificate

- Select a certificate using the checkbox
- Click the **Edit (pencil) icon**

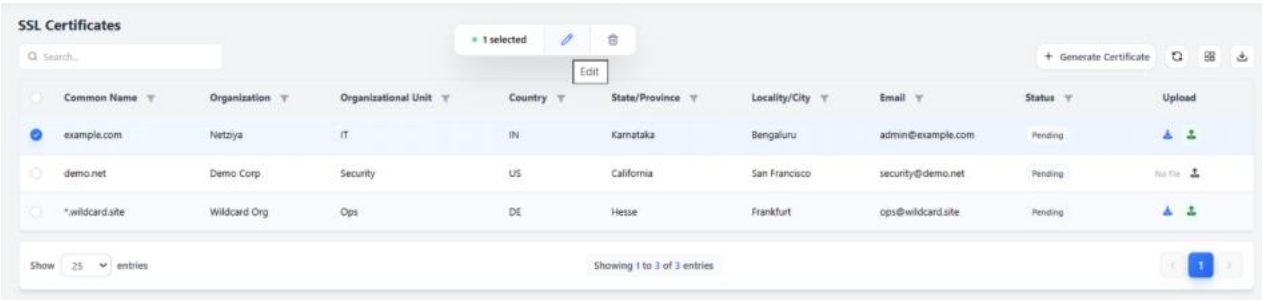

- Update certificate metadata if permitted

Security & Best Practices

- Always use **strong RSA keys (2048 or higher)**
- Use certificates issued by trusted authorities
- Restart the system after certificate upload
- Monitor certificate expiration dates
- Replace certificates before expiry to avoid service disruption

SSL configuration is considered complete when:

- CSR is generated successfully
- Signed certificate is uploaded
- HTTPS access is functional
- System restart (recommended) is completed

At this stage, the Netziya platform is secured using SSL/TLS encryption.

Single Sign-On (SSO) Configuration


The **Single Sign-On (SSO)** module enables users to authenticate into the Netziya platform using **Microsoft Azure Active Directory (Azure AD)**. This allows centralized identity management, improved security, and seamless user login without local passwords.

Note: Netziya currently supports **Azure AD–based SSO only**.

Accessing SSO Configuration

To open the SSO configuration page:

1. Navigate to **Configuration** from the sidebar

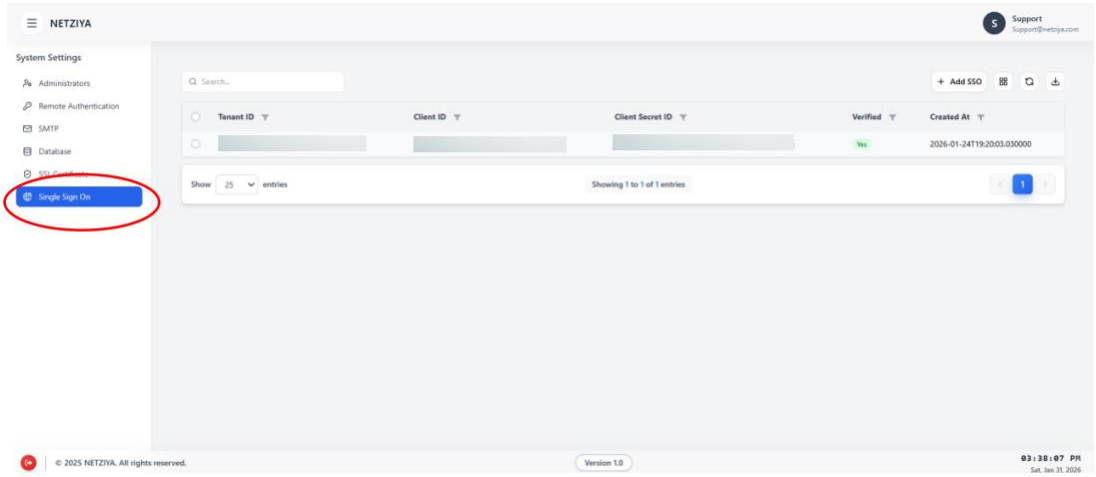

2. Click **Single Sign-On**
3. The **SSO Configuration** page opens
4.

If no SSO configuration exists, the table displays **“No SSO configurations found”**.


The SSO page includes:

- Search bar
- **Add SSO** button
- SSO configuration table
- Utility actions:
- Refresh
- Manage Columns

Add SSO Configuration

Step 1: Open Add SSO Form

- Click **Add SSO**
- The **Add SSO Configuration** popup opens

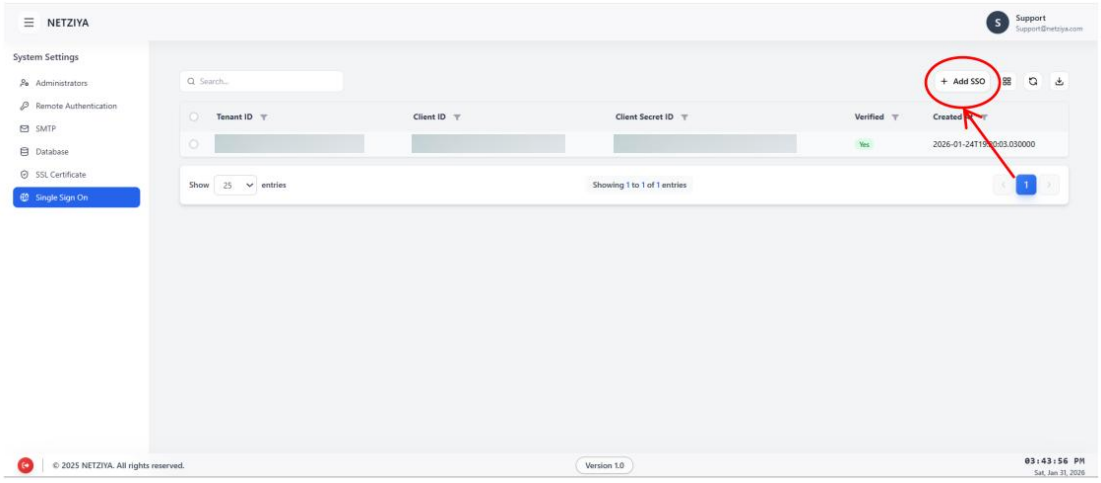

Step 2: Enter Azure AD Details


The administrator must enter the following details obtained from **Azure Active Directory**:

- **Tenant ID**
- **Client App ID**
- **Client Secret ID**
- **SSO Server Name** (display name)

These values are generated while registering the Netziya application in Azure AD.

Step 3: Submit SSO Configuration

Click **Submit**
An **SSO Verification Required** popup appears

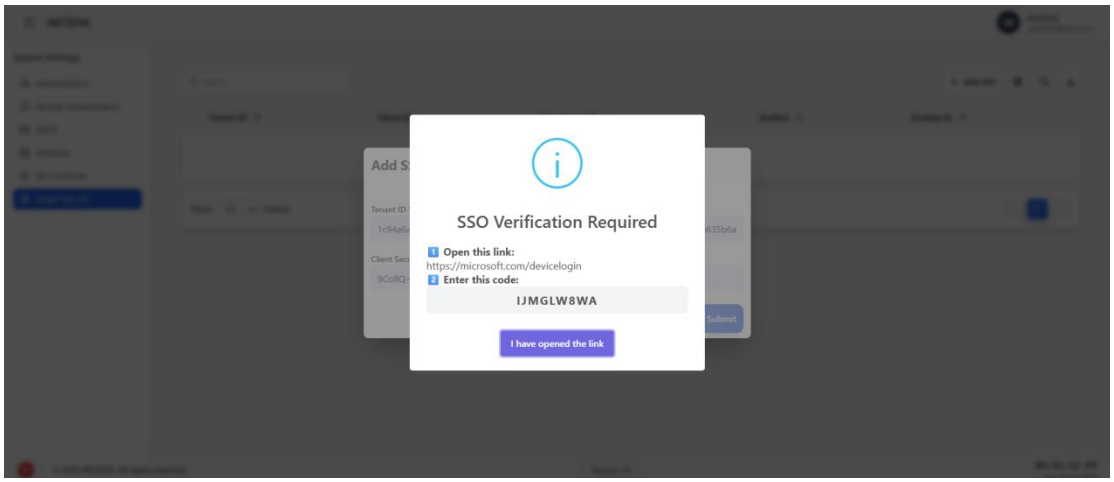


SSO Verification Process (Azure AD)

To complete verification:

Step 4: Open Microsoft Verification Link


- Click the **verification link** shown in the popup
  (example: https://microsoft.com/devicelogin)

- A Microsoft verification page opens in the browser

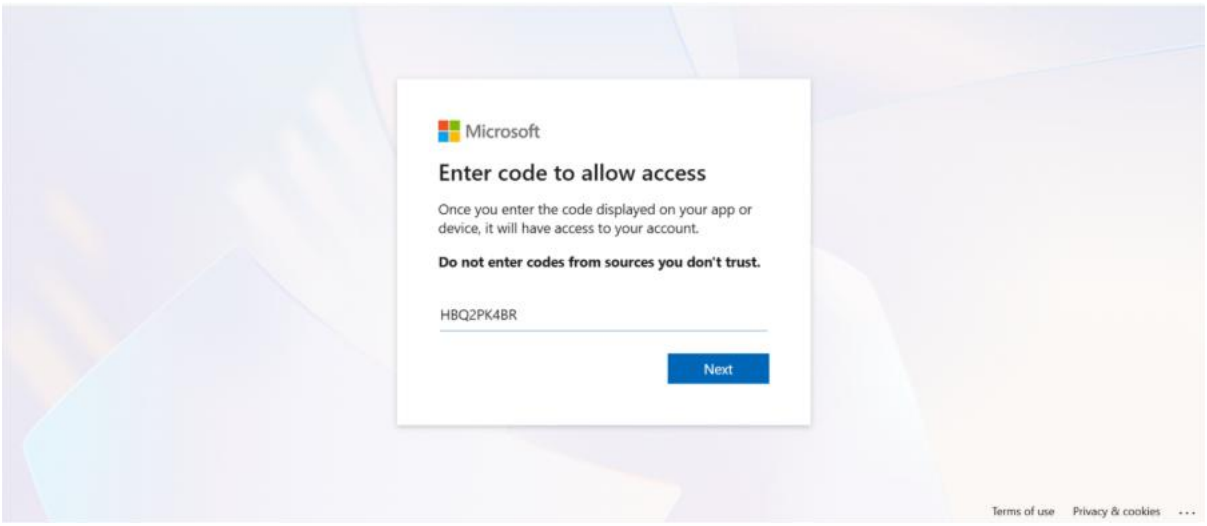

Step 5: Enter Verification Code

- Enter the **OTP / verification code** displayed in the Netziya popup
- Click **Next**

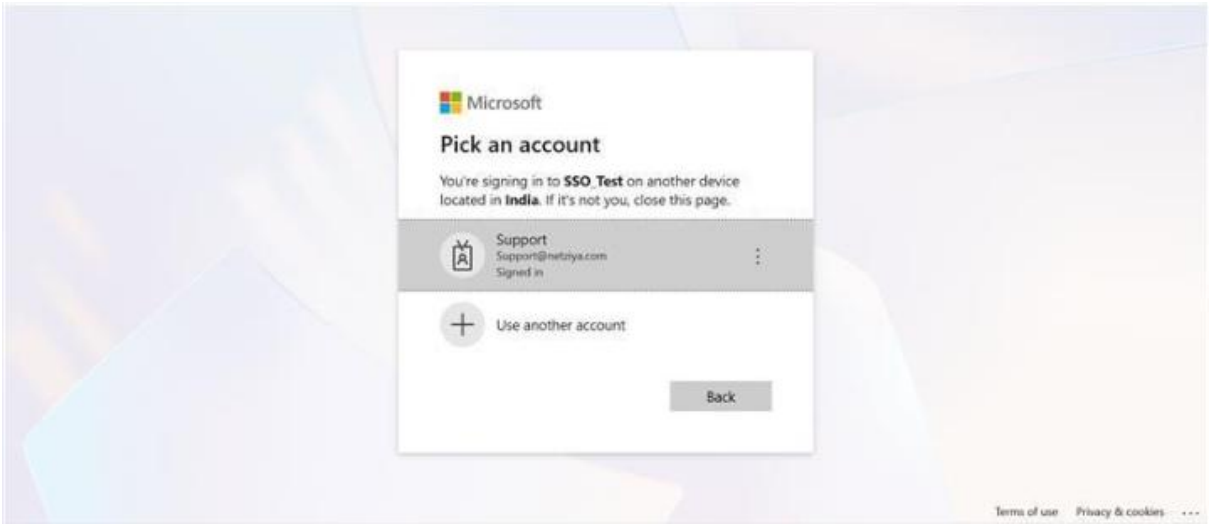


Step 6: Select Azure Account

- Select the Azure account to authorize Netziya
- Review permissions
- Continue and approve access

Step 7: Complete Verification

- Return to the Netziya verification popup
- Click **I have opened the link**

The system verifies the authorization and completes SSO configuration.

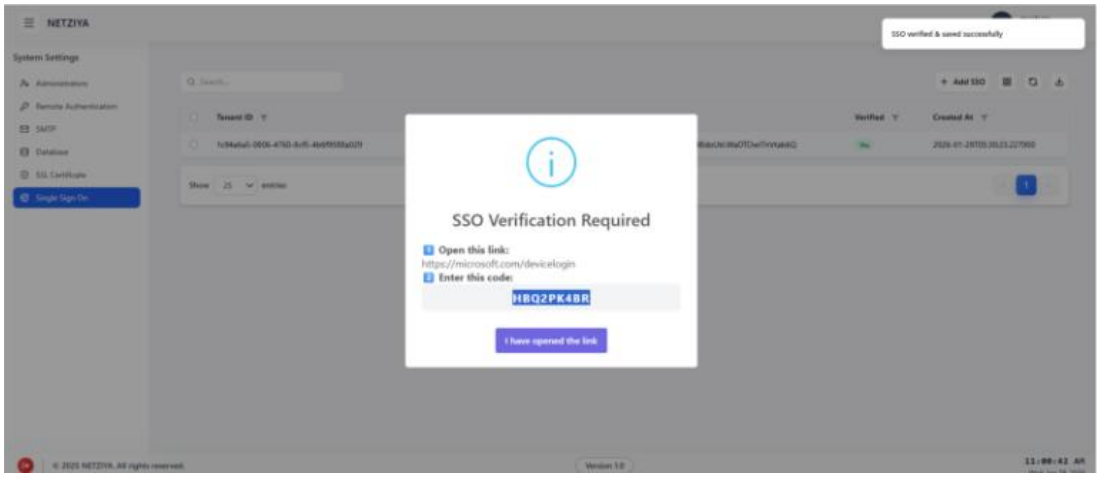

SSO Configuration Completion

After successful verification:


- The SSO configuration appears in the table
- The **Verified** status is enabled
- SSO is now active and ready for use

Creating Users with SSO


To use SSO for login, users must be created via SSO

Add Administrator via SSO

1. Navigate to **Configuration → Administrators**

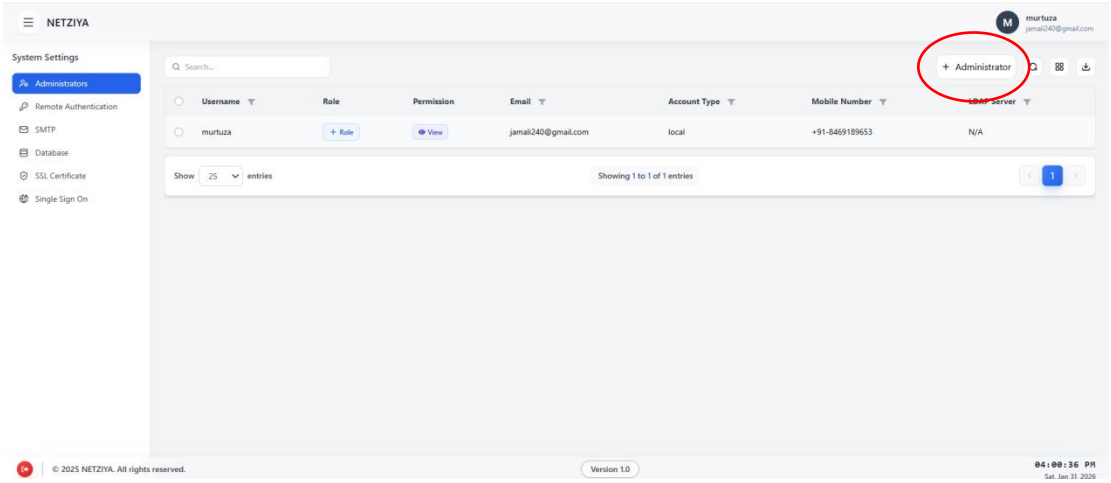

2. Click **Add Administrator**
3. Select **Account Type: Create via SSO**

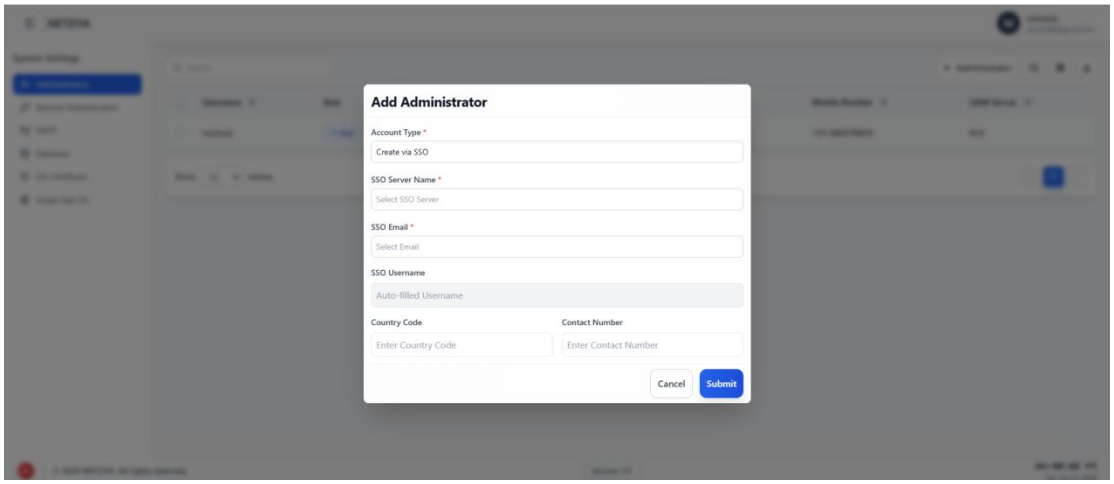

SSO User Details

The administrator provides:


- **SSO Server Name**
- **SSO Email**
- **SSO Username**
- **Contact details (optional)**

Passwords are **not required**, as authentication is handled by Azure AD.

Login Using SSO

After creation:

- User navigates to the Netziya login page
- Selects **Login with SSO**
- Authentication is redirected to Azure AD
- Upon successful login, user is redirected back to Netziya

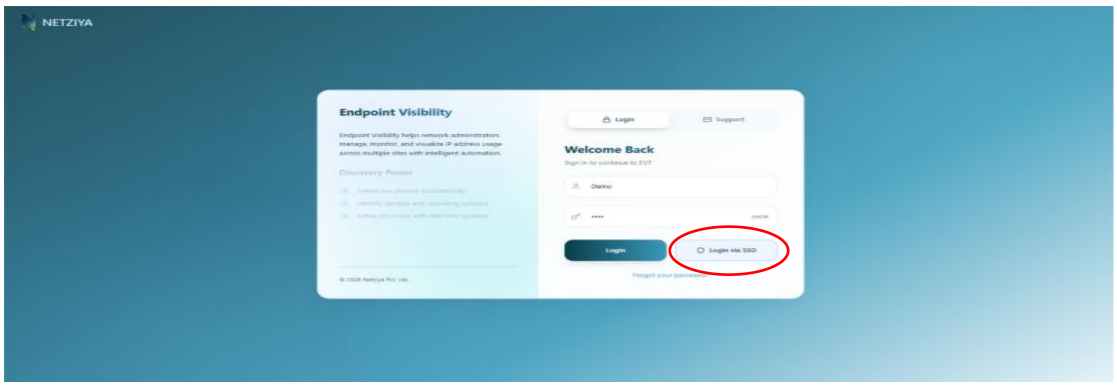


Logs (UTILS Layer)

The **Logs** module provides centralized visibility into system, service, and integration activities across the Netziya platform.
It is a **read-only monitoring module** designed for troubleshooting, auditing, and operational awareness.


Accessing Logs

To access logs:

1. Navigate to **UTILS** from the sidebar
2. Click **Logs**

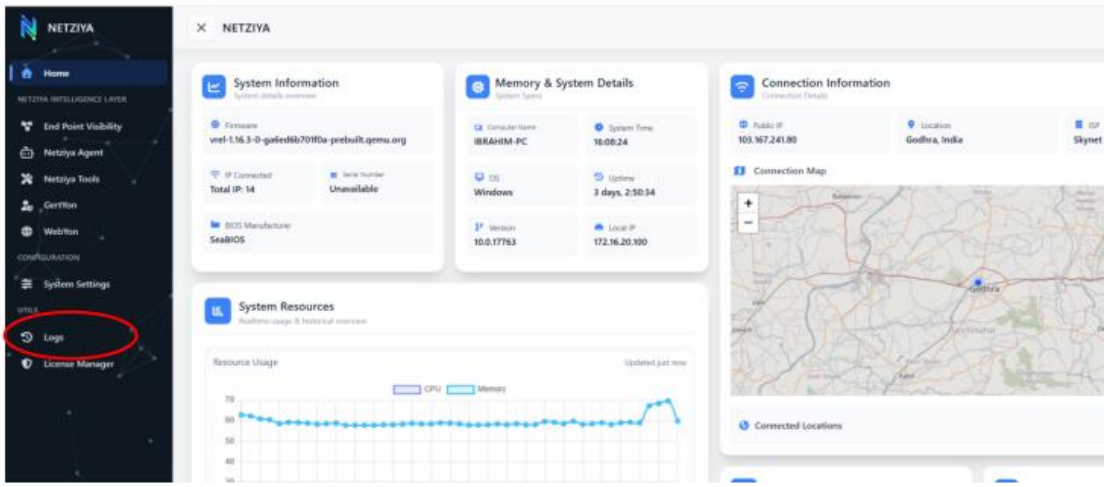

3. The Logs interface opens with a dedicated **Logs sidebar**

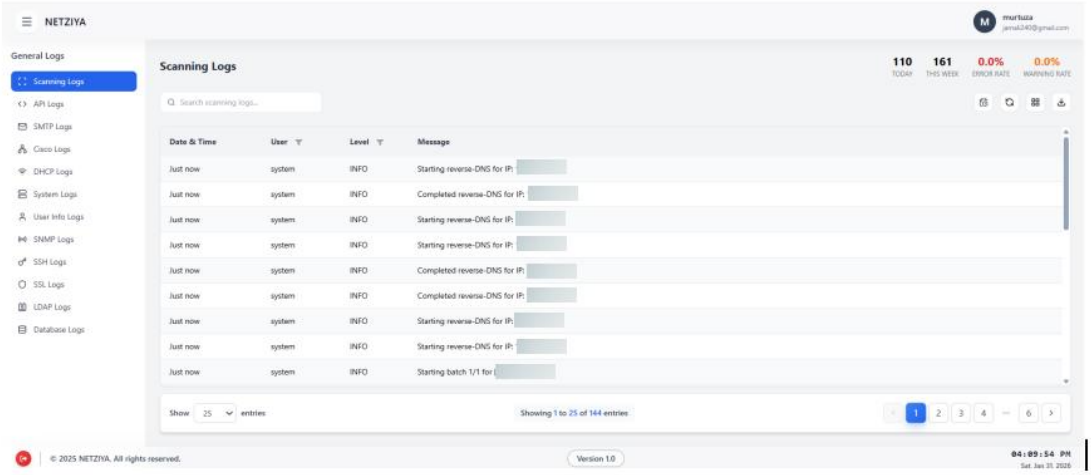

Logs Sidebar Overview

The Logs sidebar allows users to switch between different log categories:

- Scanning Logs
- API Logs
- SMTP Logs
- Cisco Logs
- DHCP Logs
- System Logs
- User Info Logs
- SNMP Logs
- SSH Logs
- SSL Logs
- LDAP Logs
- Database Logs

Each log type displays logs **only related to that service or integration**.

Logs Page Layout

Each log page follows a consistent layout:

- Search bar for quick text-based filtering
- Log statistics cards (top-right)
- Logs table
- Time filter
- Table-level filters
- Utility actions (Refresh, Manage Columns, Export)

Log Statistics

At the top-right of the page, summary cards display:

- **Today** – total logs generated today
- **This Week** – logs generated in the last 7 days
- **Error Rate (%)**
- **Warning Rate (%)**

These indicators help quickly assess system health and abnormal behavior.

Each log entry contains:

- **Date & Time**
- **User / Service Name**
- **Log Level**
  - INFO
  - WARNING
  - ERROR
- **Message**

Logs are displayed in chronological order.

Time-Based Log Filtering

Users can filter logs based on time range.

Available Time Filters

- All Time
- Last Month
- Last Week
- Last 24 Hours
- Custom Range

Custom Range Filter

- Select **From** and **To** date & time
- Click **Apply**
- Logs update instantly based on selection

Log Level Filtering

- INFO
- WARNING
- ERROR

Features:

- Select / deselect levels using checkboxes
- Search within filter
- Clear selection
- Apply selected filters

This allows users to focus only on relevant log types.

Log Types – Description

- **Scanning Logs** – Records all endpoint, subnet, and network scanning activities and related events.
- **API Logs** – Captures all inbound and outbound API requests, responses, and integration activity.
- **SMTP Logs** – Tracks email delivery attempts, successes, failures, and SMTP communication status.
- **Cisco Logs** – Displays logs generated from Cisco device integrations and telemetry events.
- **DHCP Logs** – Shows IP address allocation, lease events, and DHCP service interactions.
- **System Logs** – Contains operating system–level and internal service logs from the Netziya platform.
- **User Info Logs** – Records user login, logout, session, and account-related activities.
- **SNMP Logs** – Logs SNMP polling, traps, and monitoring events from network devices.
- **SSH Logs** – Tracks SSH-based access, command execution, and authentication attempts.
- **SSL Logs** – Displays SSL/TLS certificate operations, validation results, and encryption events.
- **LDAP Logs** – Captures directory authentication, user lookup, and LDAP synchronization events.
- **Database Logs** – Records database connections, queries, performance events, and errors.

Note: When the Logs page is opened, Scanning Logs are displayed by default

Netziya Intelligence Layer


Endpoint Visibility (EV) – Step-by-Step User Guide

1. Accessing Endpoint Visibility (EV)

After successful **login and license validation**, the user will see **Endpoint Visibility (EV)** available in the **sidebar menu**.

Steps:

1. Log in to Netziya.
2. Complete license verification (if applicable).
3. From the **sidebar**, click on **Endpoint Visibility (EV)**.
4. You will be redirected to the **Organization page** of EV.

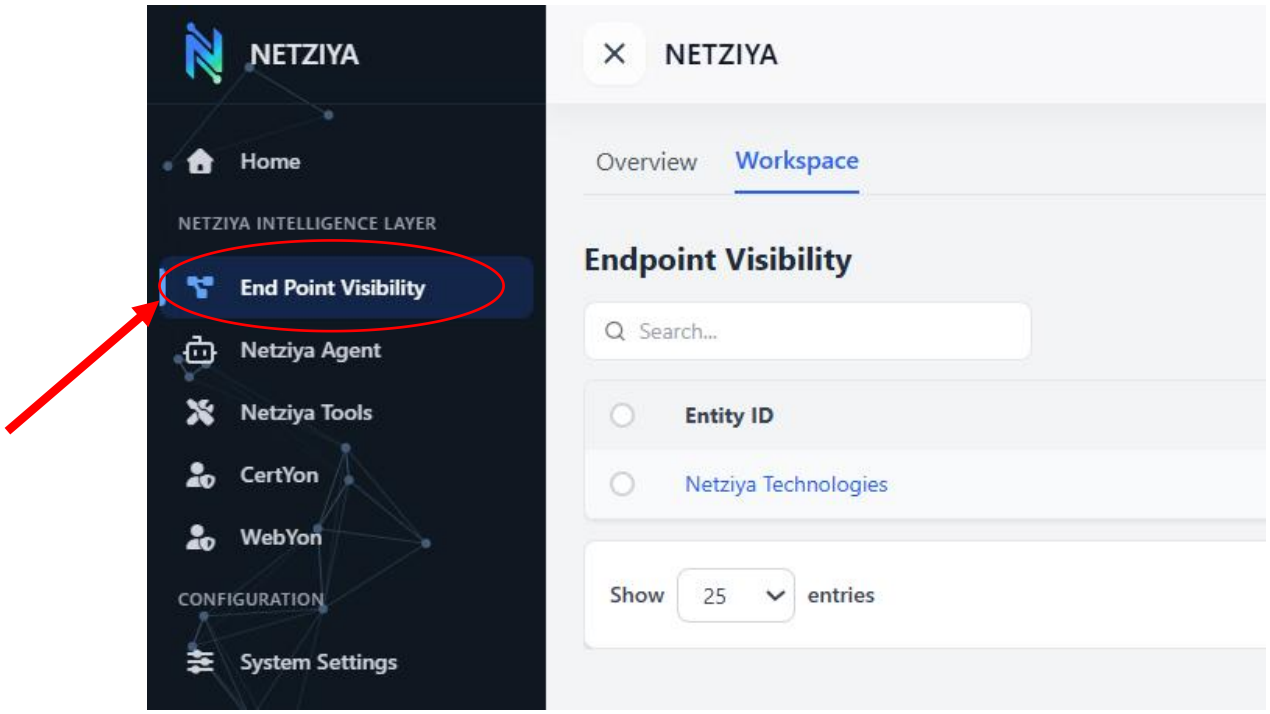

2. EV Page

The EV module is divided into **two main tabs**:

- **Workspace** – Used for all operational tasks
- **Overview** – Provides an organization-level dashboard and visual insights

Workspace


Where users **create, manage, and operate** organizations


Used for onboarding, imports, exports, and navigation

Overview

Displays **organization-based dashboard**

Shows **Mind Map view** of the organization structure
(Organization → Sites → Subnets → IPs)

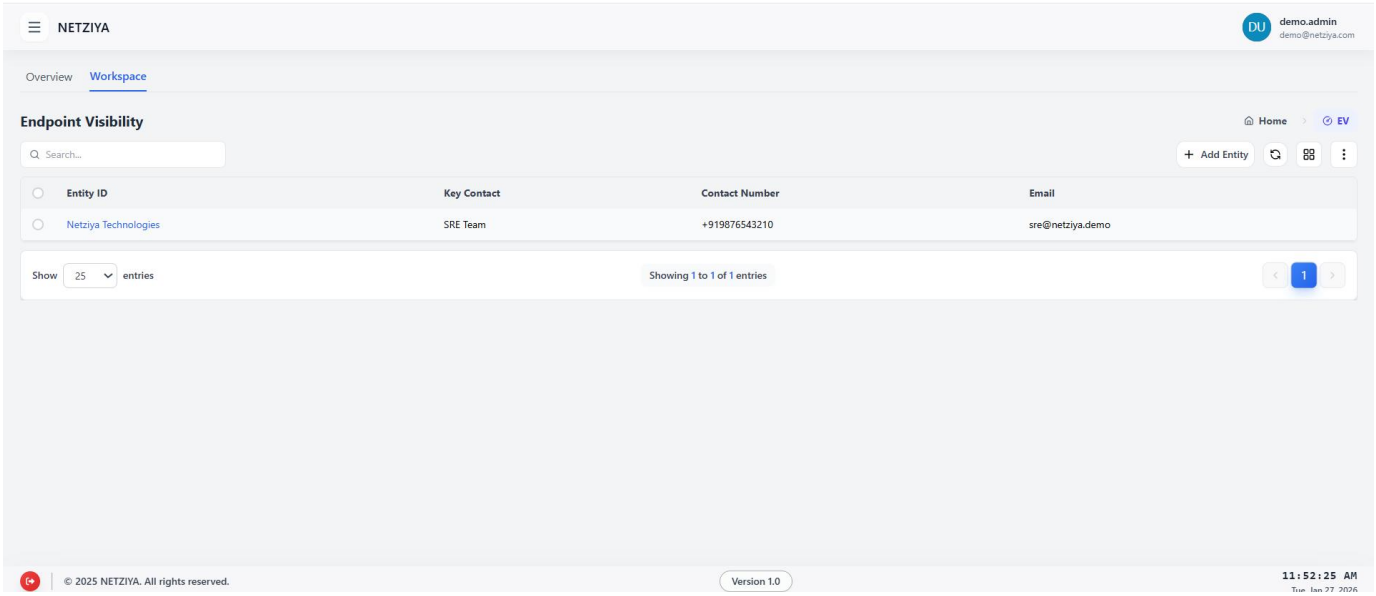



3. Organization Page (EV Landing Page)

Once inside EV, users land on the **Organization list page**.

Key Features on This Page:

- Organization list table
- Search and pagination
- Manual and automatic refresh
- Column management
- Import / Export options
- Organization-level actions.

4. Creating a New Organization

To create a new organization:

Steps:


Click **Add Entity**

Fill in the required organization details:

- **Organization Name *(**Required)
- **Key Contact Name**
- **Email Address**
- **Mobile Number**
- **Organization / Company Logo**

Click **Submit**

The organization will be added to the EV workspace And able to see in Ev Table.

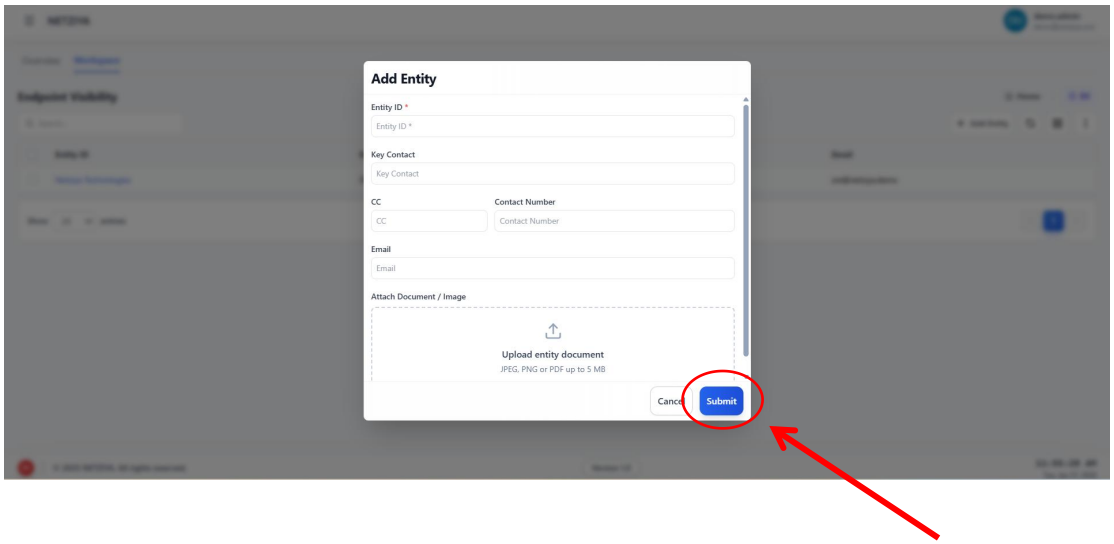


5. Refresh Functionality

The EV page supports both **manual and automatic refresh**.

Refresh Options:

- **Manual Refresh**
  Click the refresh button to reload data instantly.
- **Auto Refresh**
  Automatically refreshes data at predefined time intervals.

This ensures users always see **up-to-date organization and scan information**.

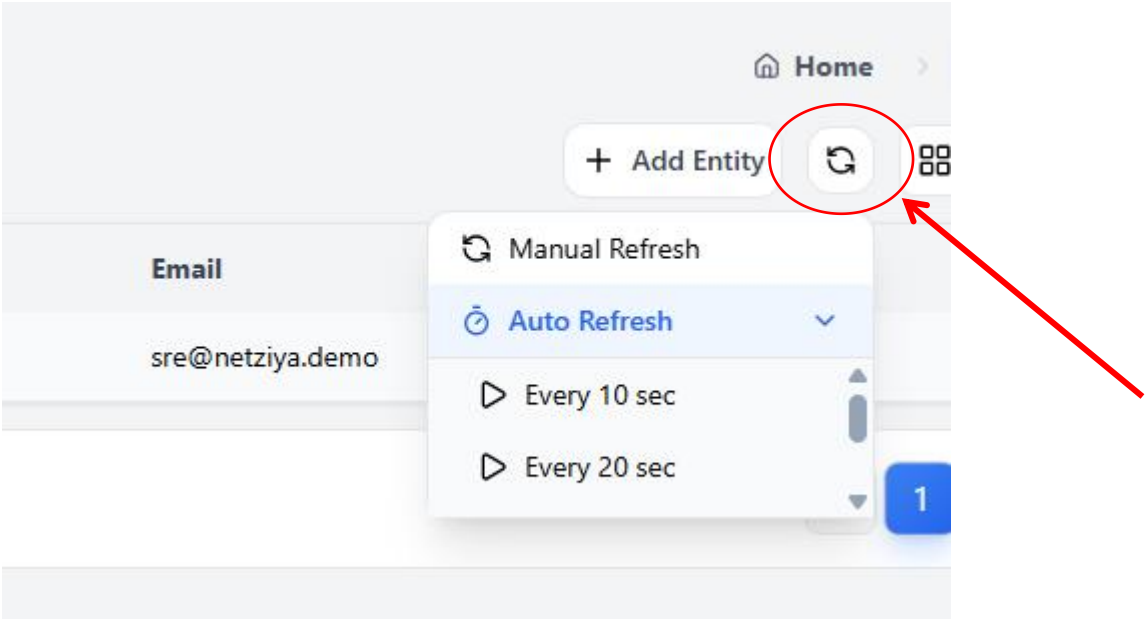


6. Manage Columns (Session-Based Customization)

Users can customize the organization table using **Manage Columns**.

Features:

- First column will be sticky only not able to change first column
- Show or hide table columns
- Rearrange column order by priority
- Locked columns cannot be change in manage column
- Changes are **session-based** (reset on new session)

This helps users focus only on the data that matters to them.

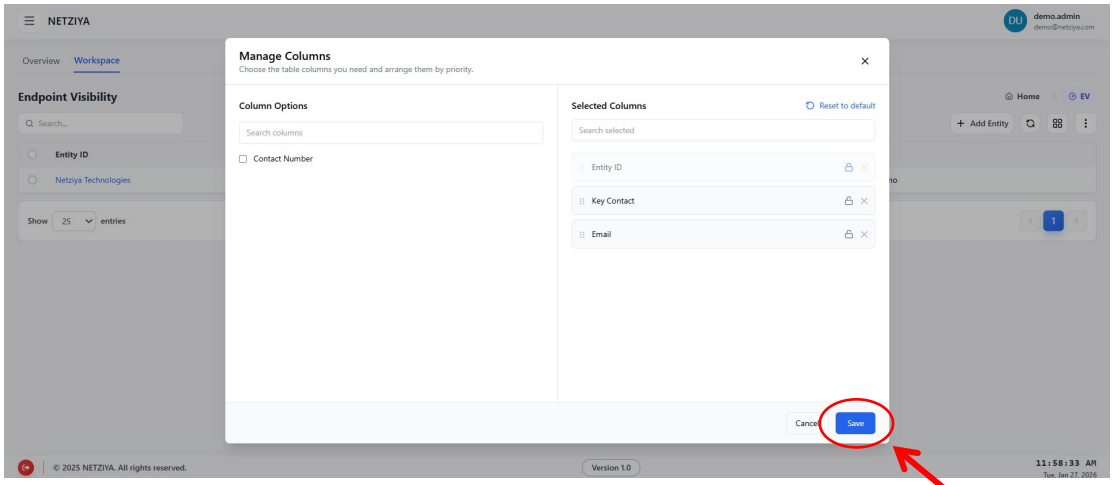

7. Import & Export Capabilities

The Organization page supports **data portability** through templates and exports.


Supported Actions:

- Template Download for Import
- Import Organizations
- Export Organization Data

Global Options:

- Global Template Download for Import
- Global Import
- Global Export

This is useful for bulk onboarding and data sharing.

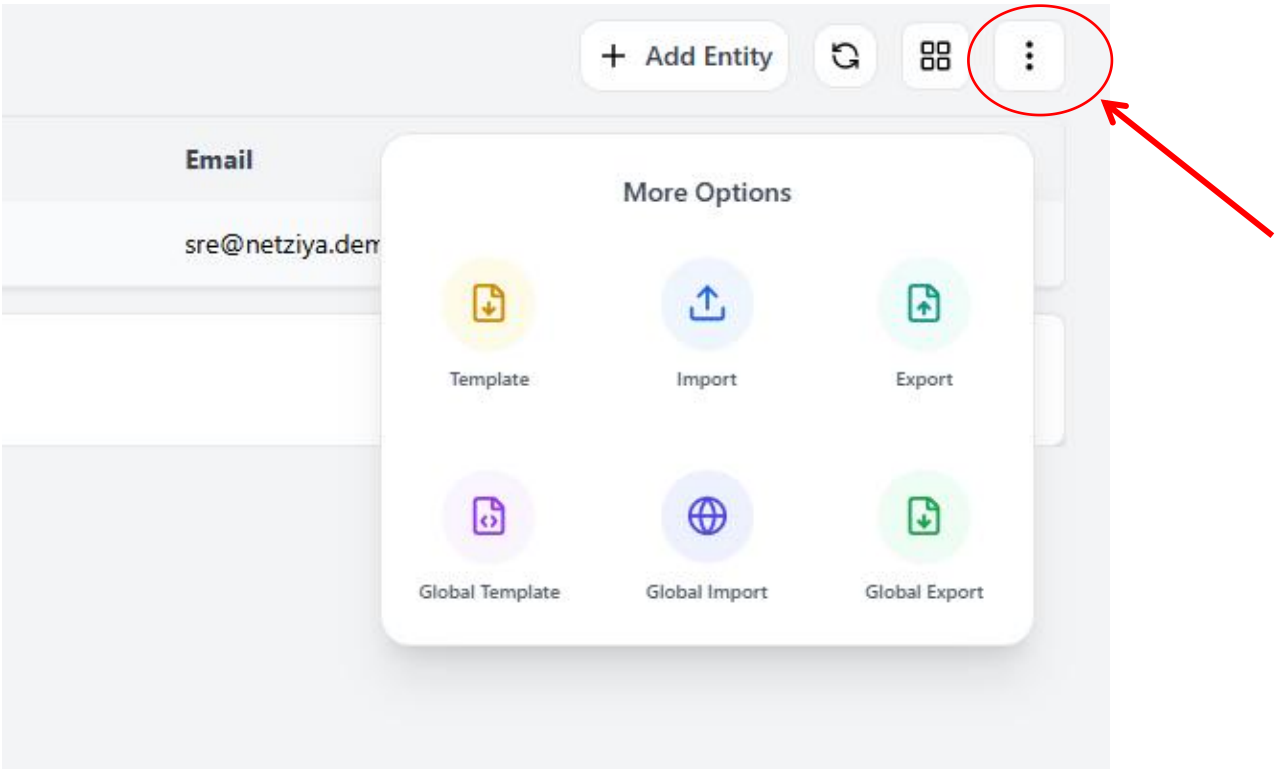

8. Organization-Level Actions (Edit / Delete)


Users can manage organizations directly from the table.

Steps:

1. Select an organization using the checkbox provide in Ev Organization Table
2. Available actions:

- **Edit Organization**
- **Delete Organization**

These actions are permission-based and controlled by user roles

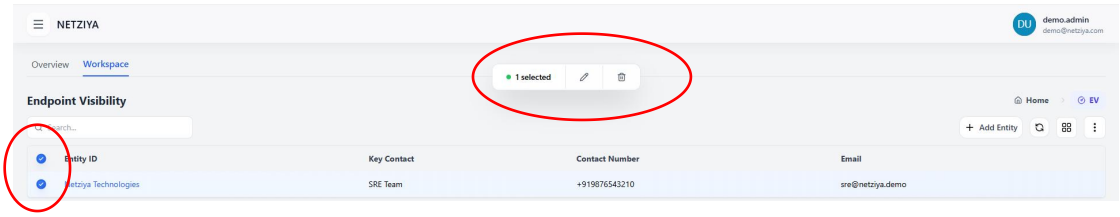


9. Navigating Inside an Organization

Clicking on an organization name in Ev or Organization table opens **four navigation options**:

Available Sections:

1. **Dashboard** : Organization-level metrics and insights
2. **Report** : Generated and historical reports
3. **Network** : Sites, subnets, IP and IP-history discovery scans
4. **IP Mapping** : IP-level visibility and history tracking

Users can freely move between these sections.

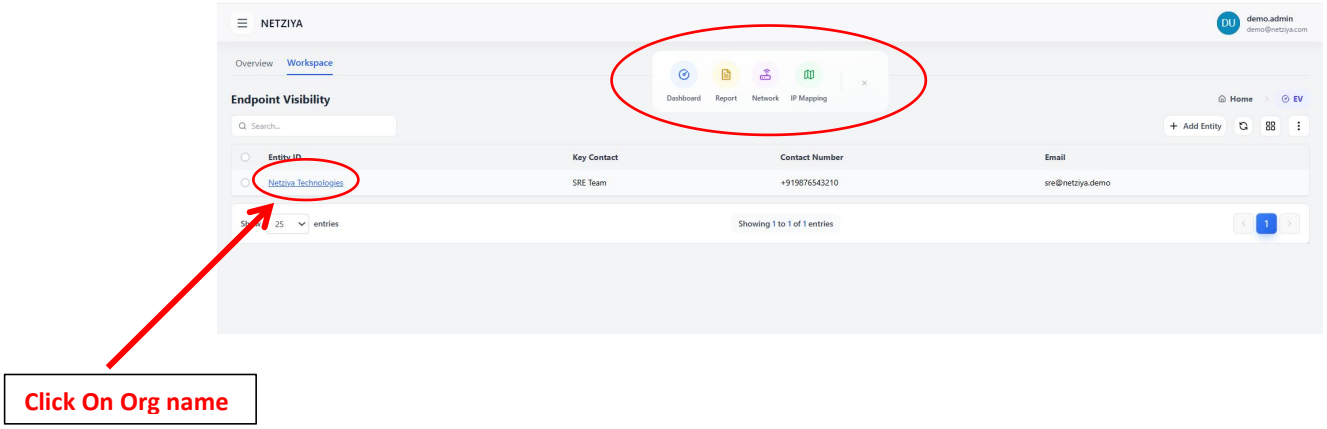


10. Breadcrumb Navigation

To ensure smooth navigation, **breadcrumbs** are available across pages.

Benefits:

- Easily move back to previous levels
- Clear visibility of current location
- Faster navigation between Organization, Site, Subnet, IP pages and IP History

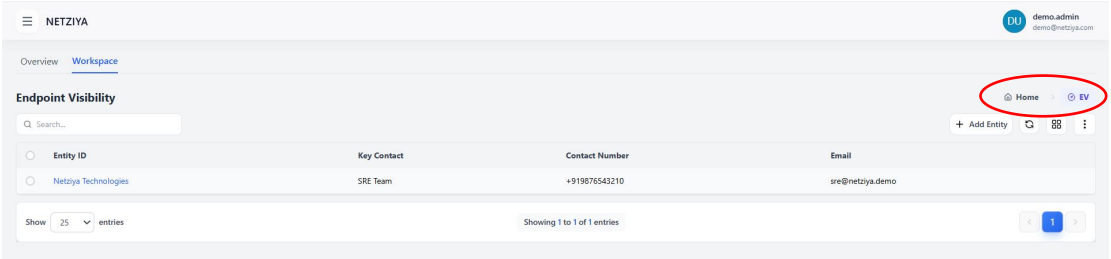


11. Organization Mind Map View (Overview Tab)

What It Shows:

- Organization at the center with org Logo
- Connected Sites to such organization
- Subnets under each Site
- Device count per subnet

This gives users an **instant visual understanding** of their infrastructure.

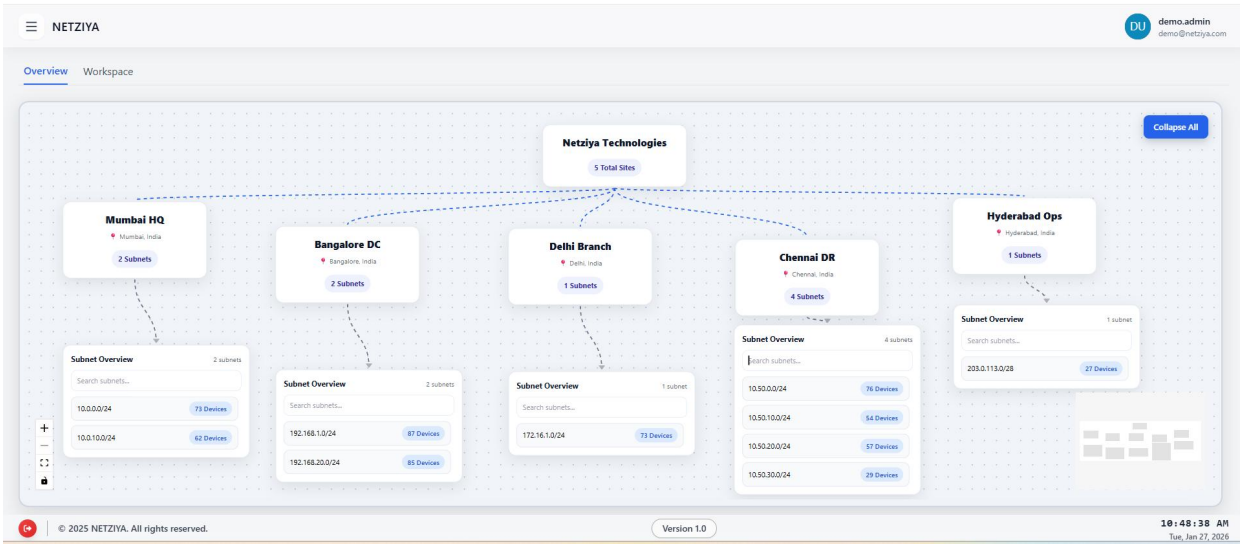

Summary

The Endpoint Visibility (EV) Organization page enables users to:

- Create and manage organizations
- Customize views per session
- Import and export data efficiently
- Navigate easily using breadcrumbs
- Visualize infrastructure using a mind map
- Access dashboards, reports, networks, and IP mapping seamlessly

Endpoint Visibility (EV) – Site (Branch) Management User Guide

1. Navigating from Organization to Site Page


After selecting an **Organization**, users will see **four navigation options**:

1. Dashboard
2. Report
3. **Network (ON CLICK)**
4. IP Mapping

Steps:

1. Click on an **Organization name**
2. Select **Network**
3. You will be redirected to the **Site (Branch) page**

The Site page is the **second level** in the EV hierarchy:
Organization → Site → Subnet → IP

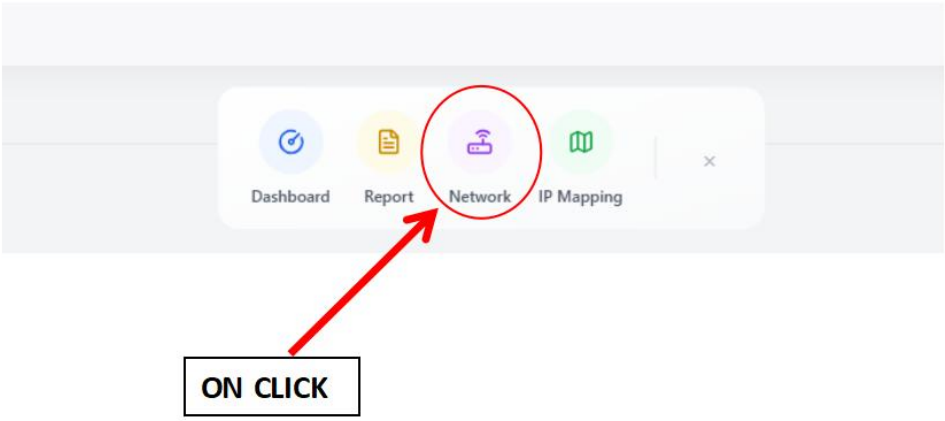

2. Site Page Structure

Similar to the Organization page, the **Site page has two tabs**:


- **Workspace** : Used for configuration and operations
- **Overview** : Visual and geographic representation of sites

3. Site Workspace Page (Landing Page)

When users land on the **Site Workspace page**, they can view and manage all sites under the selected organization.

Key Features:

- Site (Branch) table view
- Search, pagination, and filters
- **Add Branch** button
- Refresh , manage columns ,export and import
- Integration management (Add / View)
- Breadcrumb navigation for easy backtracking

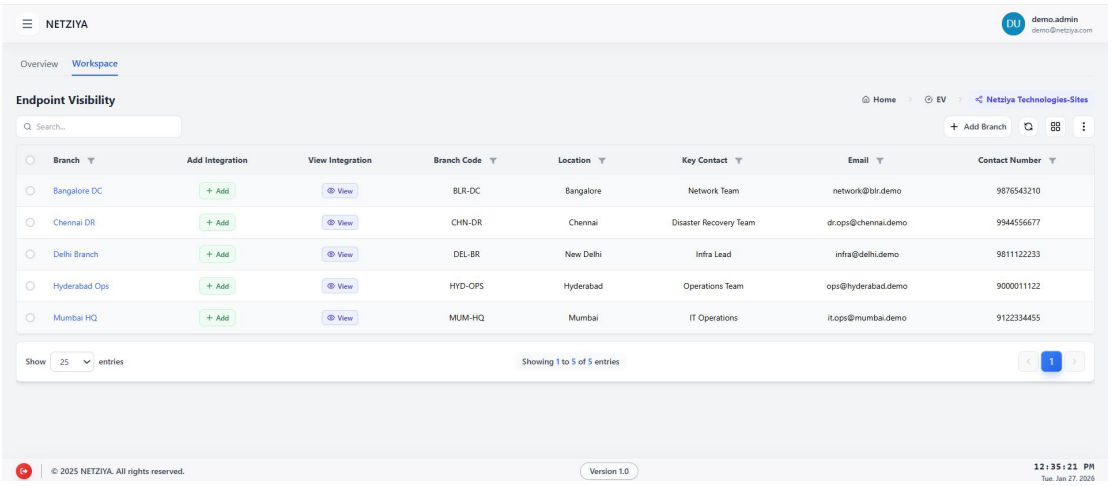

4. Adding a New Site (Branch)

To create a new site under an organization:

Steps:

1. Click **Add Branch**
2. Fill in the required details:

Branch Details

- Branch Name * *(Required)*
- Branch Code
- Location * *(Required)*

Contact Information


- Key Contact
- Email
- Mobile Number

DNS Configuration

- Standard Primary DNS * *(Required)*
- Standard Secondary DNS * *(Required)*

3. Click **Submit**

After Successful submission, the site will appear in the **Site table view**.

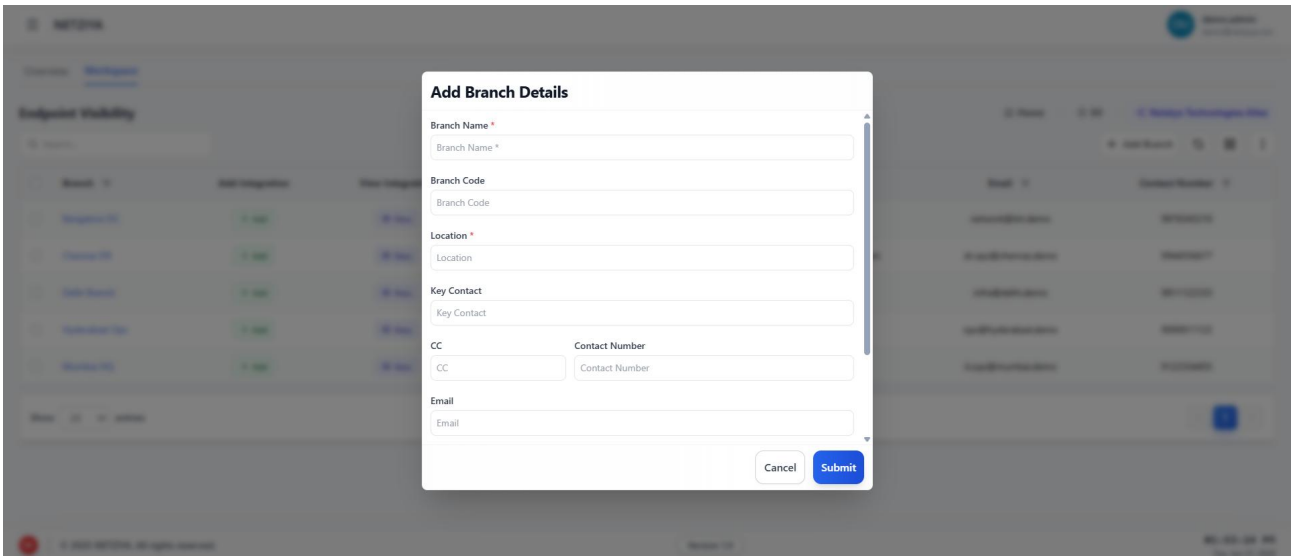

5. Site Table View

Each site entry displays key operational information:

- Branch Name
- Branch Code
- Location
- Key Contact
- Email
- Contact Number
- Integration status (Add / View)

This table acts as the **central control point** for all site-level operations.

6. Overview Tab – Site Map & Card View

Switching to the **Overview tab** provides a **visual and geographic view** of all sites.

Left Panel – Site Cards

Each site card displays:


- Site name
- Total **Subnet count**
- **Live Scan** status


Live Scan Logs

- Clicking on **Live Scan** shows scanning logs for that site
- Helps users track scan activity and status

Right Panel – Global Map

- Displays all sites on a world map
- Click a site card to zoom to its location
- Zoom in/out for detailed geographic visibility
- Site markers show detailed site information on interaction

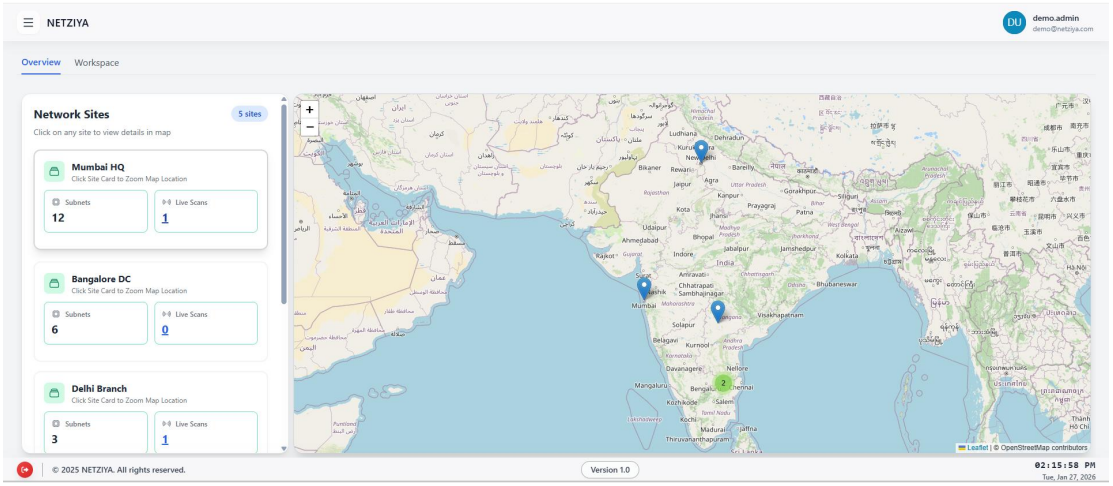

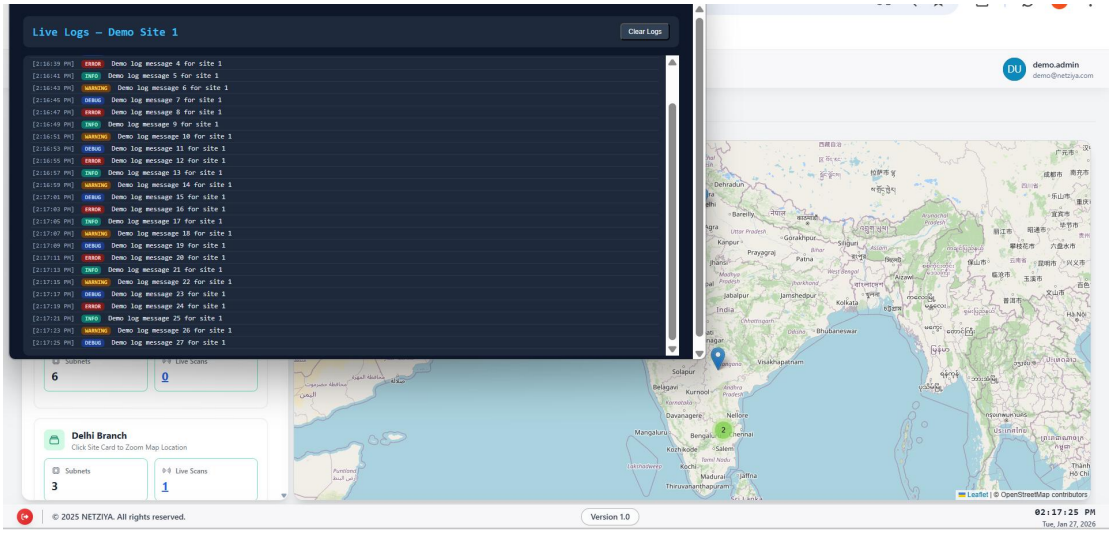


7. Site-Level Integration Management

Each site supports **multiple integrations**, configurable using the **Add** button in the table.

These integrations form the **core engines** of Endpoint Visibility at the site level.

- Active Discovery Engine (Default)
- Infrastructure Integration Engine
- SNMP Telemetry & Polling Engine
- VPN Telemetry & Polling Engine

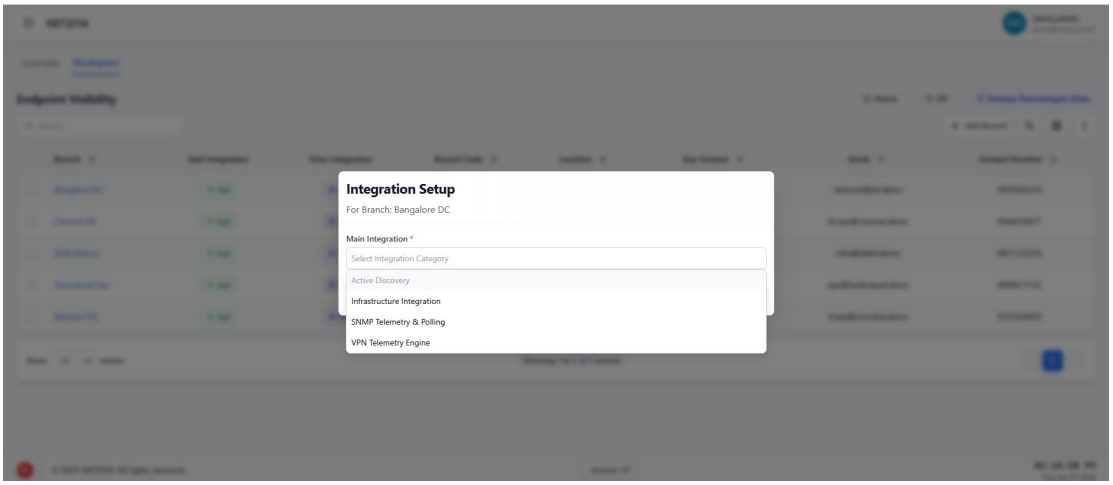

1. Active Discovery Engine (Default)

- Enabled by default
- No configuration required

Capabilities:

- ICMP Ping
- Port Scanning
- DNS Resolution
- OS Detection

This engine provides **baseline discovery** for every site.

2. Infrastructure Integration Engine

Infrastructure integrations allow Netziya to collect **authoritative device data**.

Supported Integration Types:

a) API Integration

- Fortinet

b) SSH Integration

Supported platforms include:

- Cisco IOS XE
- Cisco Nexus
- Cisco ASA
- Cisco Firepower
- Cisco Router
- Cisco VXLAN
- Cisco Dot1X
- Fortinet
- Palo Alto
- Check Point
- Arista
- Aruba

c) DHCP Integration

- **Windows DHCP** (via WinRM)
- **Linux DHCP** (via SSH)


These integrations enable deeper and more accurate visibility.

3. SNMP Telemetry & Polling Engine

- Supports **SNMP v2**
- Used for detailed infrastructure telemetry

Data Collected:

- Device status
- Interface metrics
- Performance and availability information

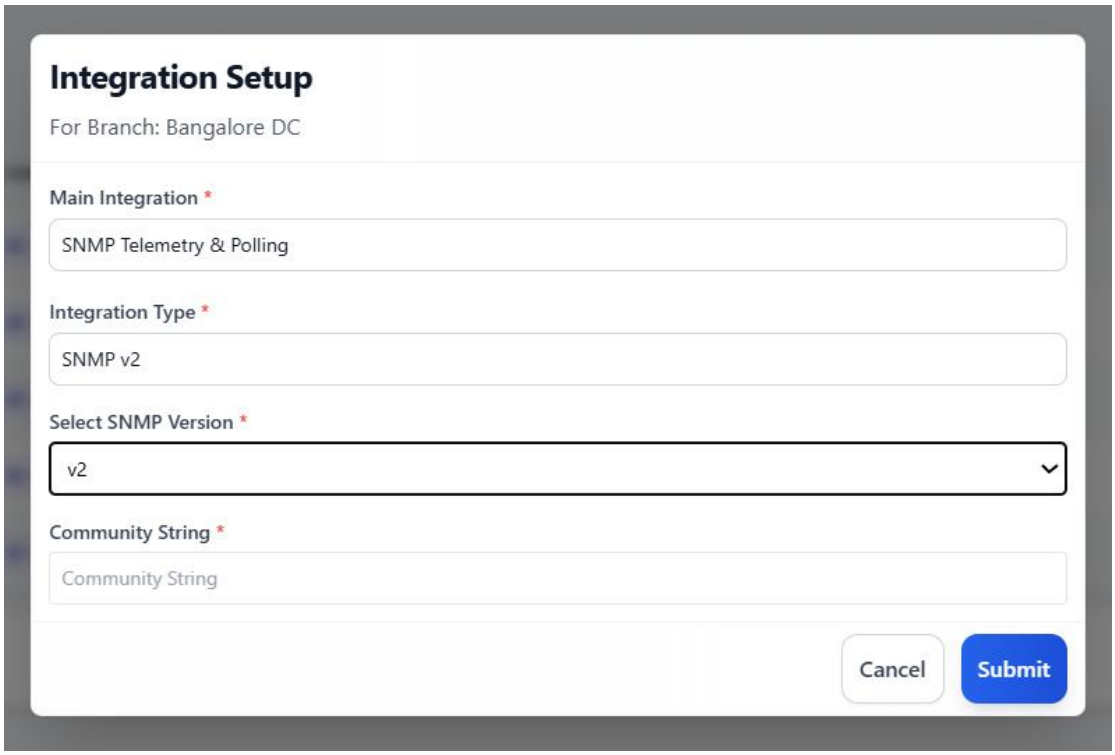

4. VPN Telemetry & Polling Engine


Provides visibility into VPN usage at the site level.

Supported VPN Platforms:

- Fortinet VPN
- Palo Alto VPN
- Cisco ASA VPN
- Check Point VPN

This engine helps track:

- Active VPN sessions
- User and IP associations

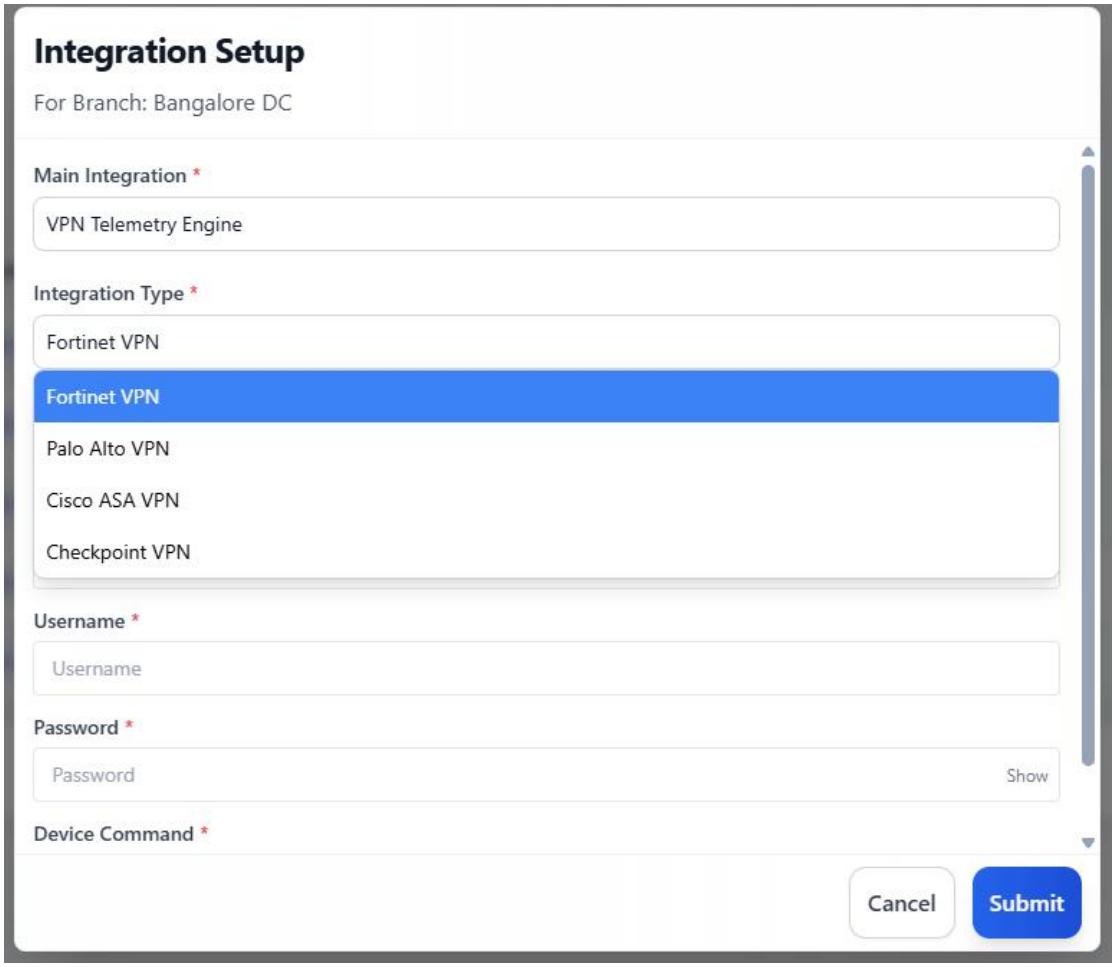


8. Viewing & Managing Site Integrations

Each site has a **View** button for integrations.

Using View Integration:

- See all integrations configured for the site
- Identify which engines are active
- Edit integration settings
- Delete integrations if no longer required

This ensures users always understand **what data is being collected and how**.

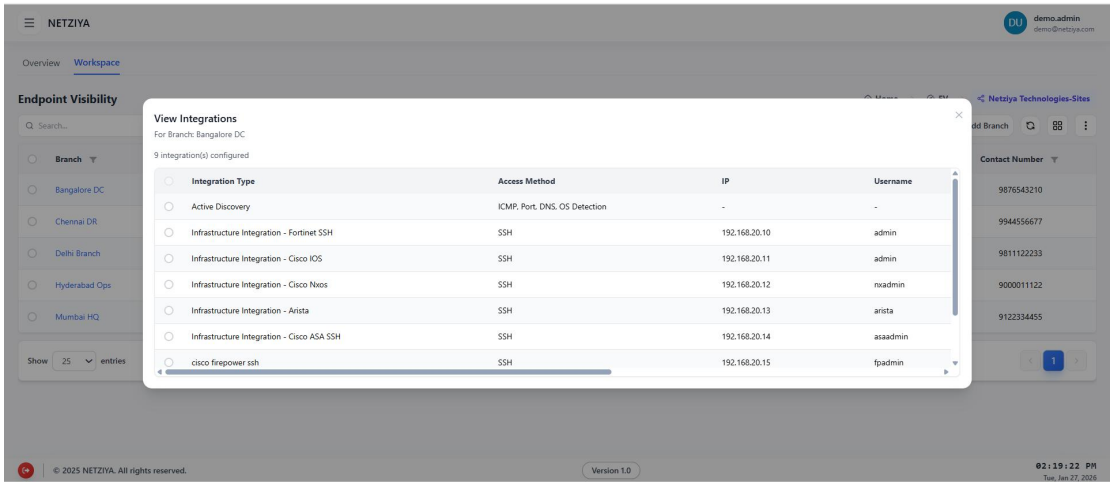


9. Breadcrumb Navigation

Breadcrumbs are available across the Site module to help users navigate easily:

Home → EV → Organization → Site

This allows quick movement between pages without losing context.

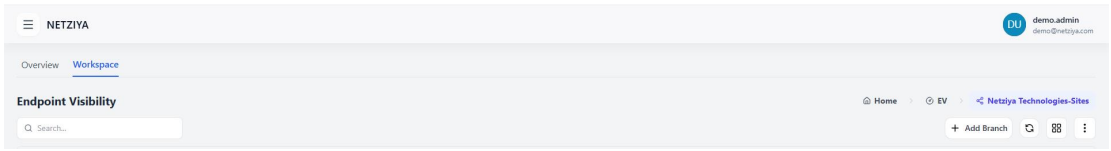

10. Summary

The EV Site page allows users to:

- Create and manage branches/sites
- Visualize sites on a global map
- Monitor subnet counts and live scans
- Configure multiple discovery and telemetry engines
- View, edit, and delete site-level integrations
- Navigate easily using breadcrumbs and tabs

Endpoint Visibility (EV) – Subnet Management User Guide

1. Navigating to the Subnet Page

The Subnet page is the **third level** in the EV hierarchy:

Organization → Site → Subnet → IP

Steps:

- Navigate to **Endpoint Visibility (EV)**
- Select an **Organization**
- Click **Network**
- Select a **Site (Branch)**
- Click on the **Site name**


You will be redirected directly to the **Subnet page** for that site.

2. Subnet Page Structure

Similar to other EV modules, the Subnet page contains **two tabs**:

- **Workspace** – Operational and configuration tasks
- **Overview** – Visual, health, and analytical insights

By default, users land on the **Workspace tab**.

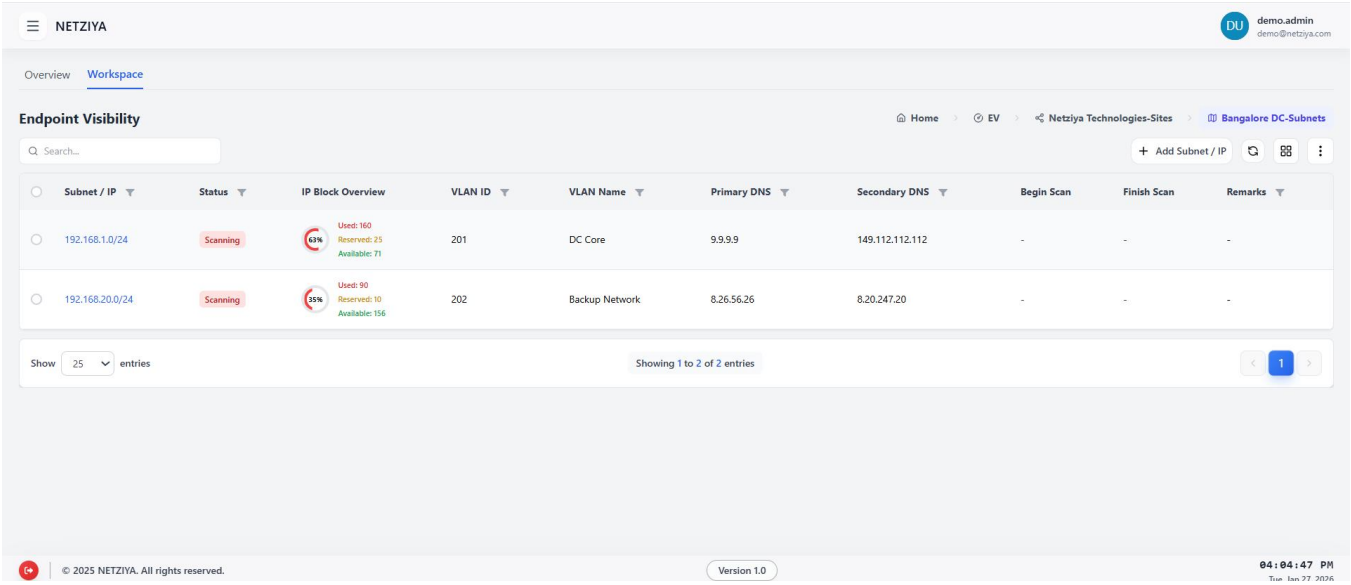

3. Subnet Workspace Page (Landing Page)

The Workspace page displays **all subnets** configured under the selected site.

Key Features:

- Subnet table view
- **Add Subnet / IP** button
- Manual refresh
- Column management
- Template download
- Import and export options
- Breadcrumb navigation

4. Adding a New Subnet

To add a subnet:

Steps:

1. Click **Add Subnet / IP**
2. The **Add Subnet** form opens
3. Enter subnet details and scan preferences
4. Click **Submit**

The Subnet form provides **multiple scan control options**, allowing flexible scanning behavior.

a) Available Scan Check Box Options:

1. Scan Local Network

- Automatically detects the local subnet
- No need to manually enter the network address
- Useful for on-premise environments

2. No Scan

- Disables all scanning for the subnet
- Suitable for guest or restricted networks
- Subnet data is stored without active scanning
- When enabled, other scan options are automatically disabled.

3. Scan All Ports

- Scans all **65,535 ports**
- Used for deep security assessment
- May increase scan duration

4. Ports / Status Alert

- Enables alerting for port or device status changes
- Requires an **Alert Email ID**
- Alerts are sent automatically (**IF SMTP EMAIL IS CONFIGURED**)

5. Public IP

- Enables deep scanning for public-facing IP addresses
- Useful for perimeter and internet-exposed assets
- Isp asn and organiztion name are able to fetched

6. SSL Certificate *(CertYon Licensed)*

- Available only if **CertYon** license is active
- Collects SSL certificate details for IPs
- Enables certificate expiry alerts

7. URL Checker *(WebYon Licensed)*

- Available only if **WebYon** license is active
- Performs website and URL analysis
- Alerts enabled for web-related findings



b) Scan Frequency Configuration

Users can define how often the subnet is scanned.

Available Options:

- Default (every 15 minutes)
- 2 Hours
- 4 Hours
- 6 Hours
- 12 Hours

If no changes are made, Netziya performs **automatic scans every 15 minutes**.

c) Enter Custom Port

- Able to add custom port number of user want in it able to make scan on subnet on enter of subnet



d) DNS Auto-Population

- **Primary DNS** and **Secondary DNS** are automatically pre-filled
- Values are inherited from the **Site configuration**
- Users can modify them if required




e) Approval & Notification **(IF SMTP EMAIL IS CONFIGURED)**

When an **Approval Email ID** is provided:

An email notification is sent on:

- Subnet creation ,Subnet update ,Useful for change approval and audit tracking



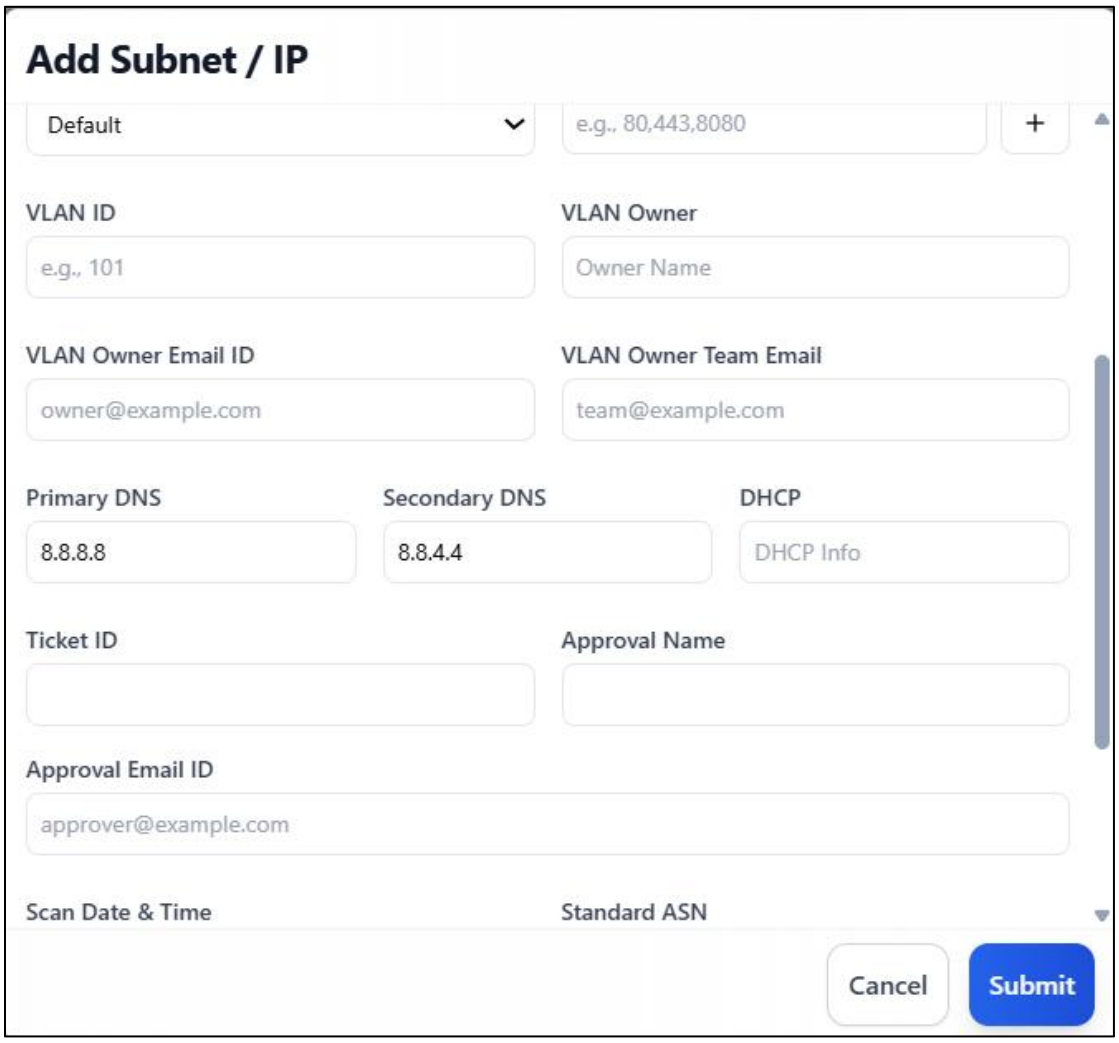

5. Subnet Status & Live Scanning

Once a subnet is added, users can see real-time scan status.

Subnet Status States:

- **Queued**
- **Scanning**
- **Scanned**

Table View Insights:

- Used IP count
- Reserved IP count
- Available IP count
- Visual utilization percentage
- Last scan time
- Scan completion time


This helps users monitor **capacity planning** and avoid IP exhaustion.

6. Subnet Overview Tab

The **Overview tab** provides analytical and visual insights for the site for all subnets

New & Retired Devices

- Shows devices added or removed in the last 7 days
- Helps track infrastructure changes




Integration Status

Displays which integrations are configured:


- Infrastructure Integration
- SNMP Telemetry
- VPN Integration
- Infrastructre Integrations list

Lists all active integration modules

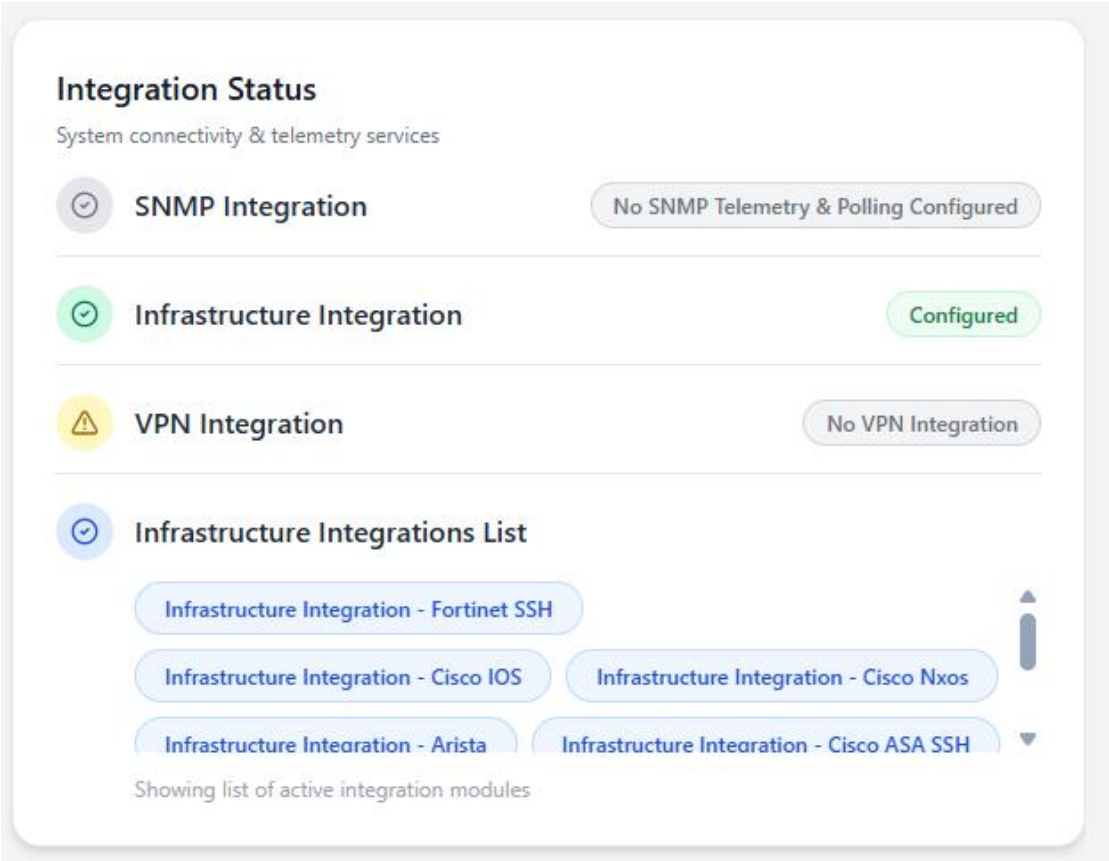

Subnet Health & Capacity

- Total IP addresses
- Used IP addresses
- Available IP addresses
- Utilization percentage
- Health indicator (Normal / High Usage)

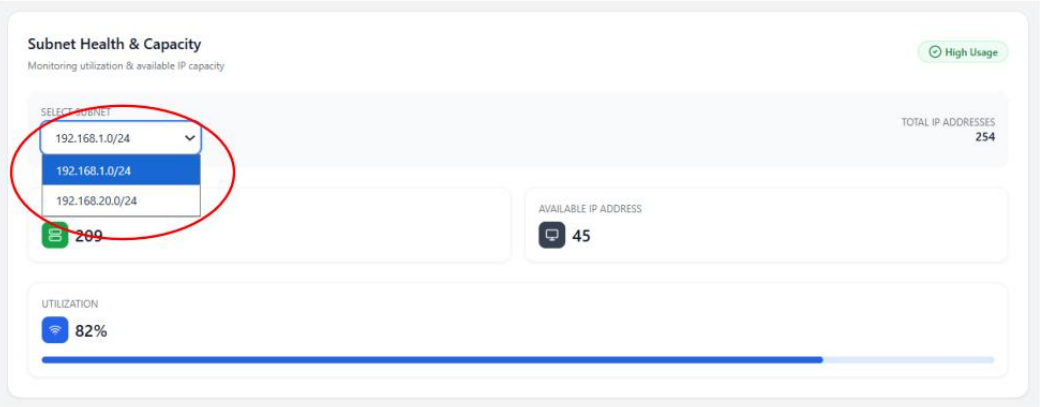

Live Device Summary

Provides real-time device insights:

Used IP count

Total devices discovered

Reachable device percentage

IPs with open ports



Open Ports Details

Clicking **IP with Open Ports** shows:

Open ports

Services (HTTP, HTTPS, SSH, SMB, FTP, etc.)



Top OS by Device Count

Displays operating system distribution within the subnet.


Examples:

- Windows
- Linux
- Network OS




OS Drill-Down:

Clicking an OS redirects to the **OS-based device list**

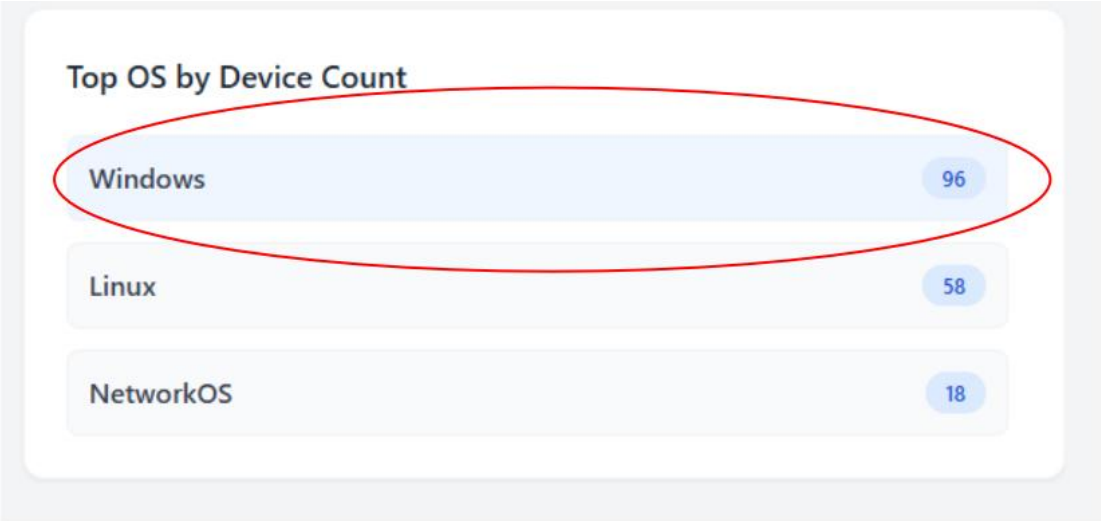


Shows:

- IP address
- Hostname
- Vendor
- Open ports
- Scan status

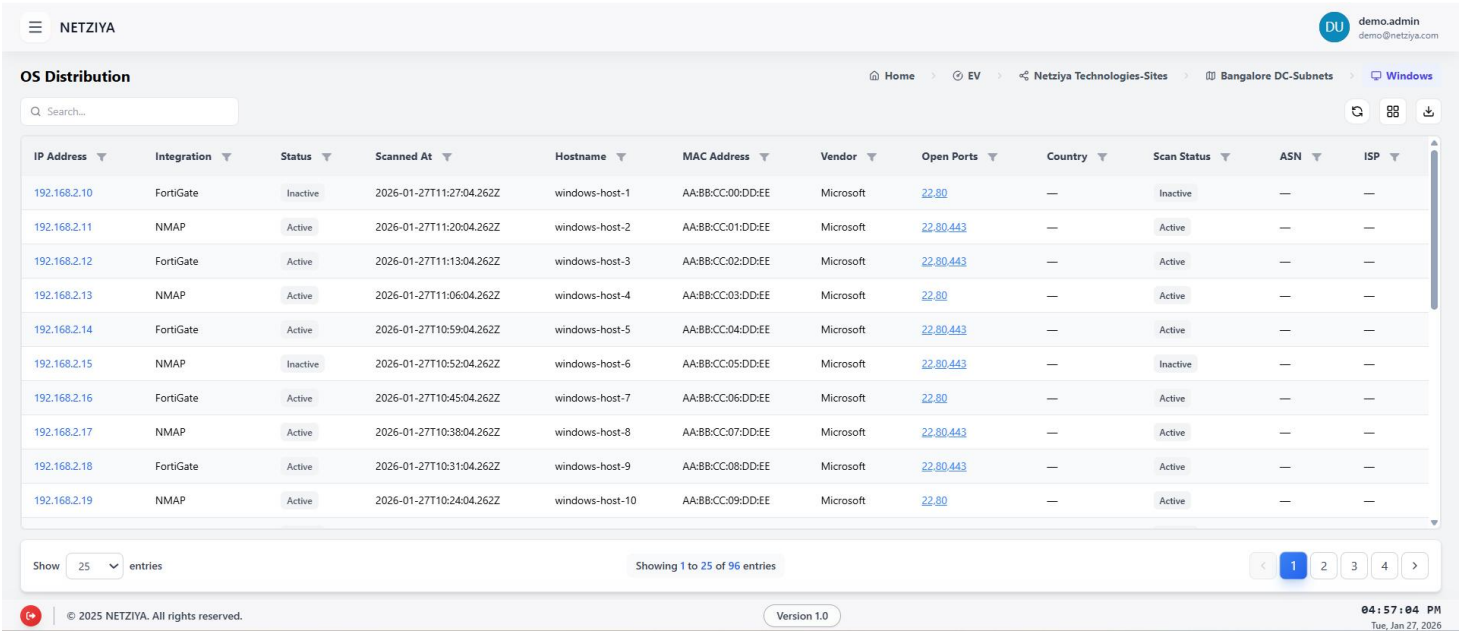

IF VPN IS CONFIGURED ON SITE

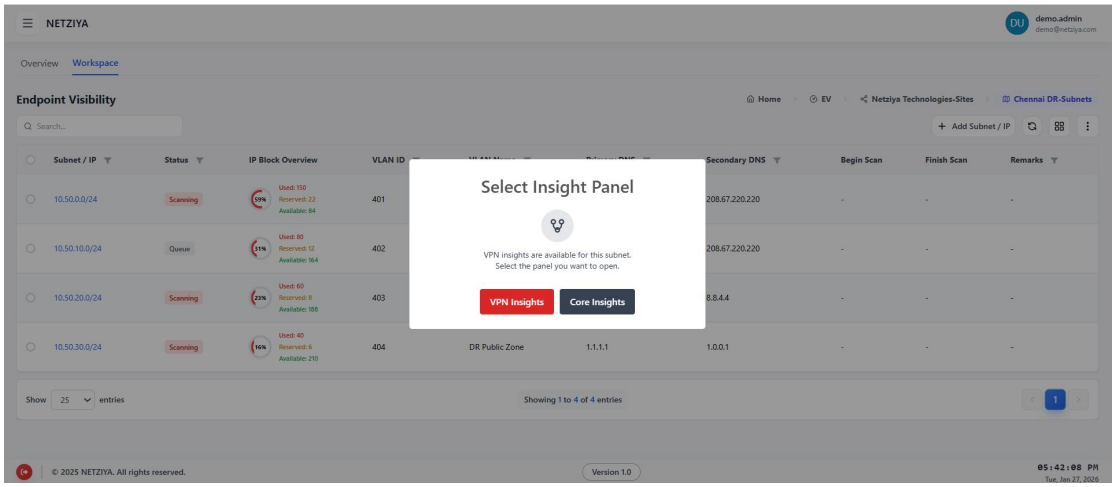

When VPN Telemetry is configured for a site, Netziya provides users with an additional insight layer at the subnet level. This ensures clear separation between core network visibility and VPN-specific visibility, while maintaining a consistent navigation experience.

If VPN integration is enabled for a site, then **upon clicking a subnet**, the system displays a **"Select Insight Panel"** dialog.

This prompt allows the user to choose which dataset they want to explore for the selected subnet.

Available Options

1. **Core Insights**
2. **VPN Insights**

On click of vpn insights go to vpn ip page and on click of core insight redirect to core IP page

Summary

The Subnet page enables users to:

- Add and manage subnets
- Control scanning behavior per subnet
- Monitor live scan status
- Track IP usage and capacity
- View device and OS distribution
- Drill down to IP-level visibility
- Receive alerts and notifications
- Integrate SSL and Web intelligence (CertYon & WebYon)

Endpoint Visibility (EV) – IP Address Page User Guide

1. Navigating to the IP Page

The IP page is the **fourth** in the EV hierarchy:

Organization → Site → Subnet → IP

Steps:

1. Open **Endpoint Visibility (EV)**
2. Select an **Organization**
3. Go to **Network**
4. Select a **Site**
5. Click on a **Subnet**
6. Click on the **Subnet name**


You will be redirected to the **IP Address page** for that subnet.

2. IP Page Structure

The IP page is divided into **two tabs**:

- **Workspace** : Detailed IP-level data (Landing page)
- **Overview** : Summary and statistics for the subnet

By default, users land on the **Workspace tab**.

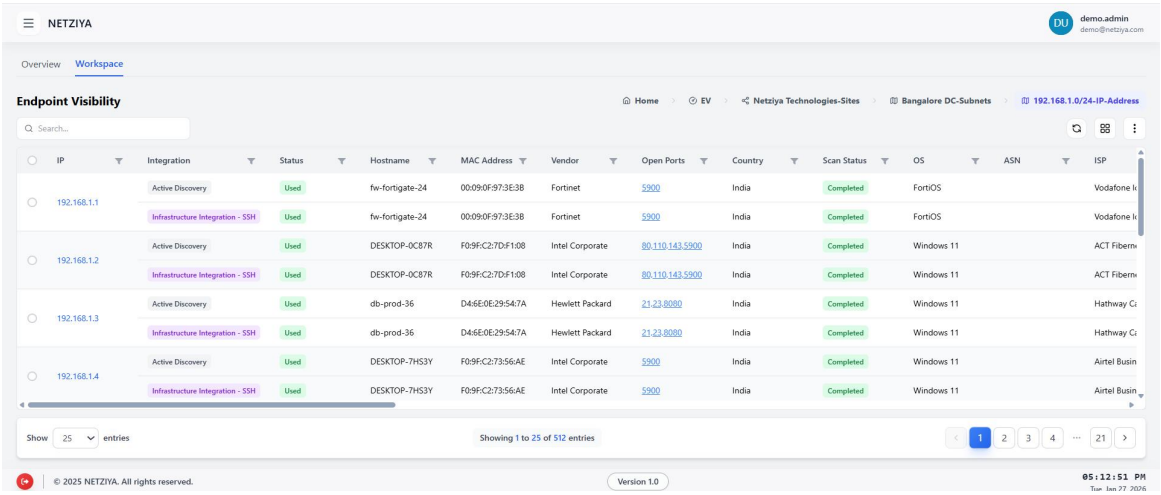

3. IP Workspace Page (Landing Page)

The Workspace tab displays a **read-only list of all scanned IP addresses** within the selected subnet.

Key Characteristics:

- No IPs can be added or edited from this page
- Data is automatically populated from scans
- Used for **analysis and monitoring only**

4. IP Table Overview

Each row in the table represents an **IP address**, enriched with data collected from **multiple engines**.

Displayed Information Includes:

- IP Address
- Integration source
- Usage status
- Hostname
- MAC Address
- Vendor
- Open ports
- Country
- Scan status
- Operating System
- ASN
- ISP
- And many more other too..

A) Row-Span Integration View

The IP table is designed using a **row-span layout** to improve readability.

How It Works:

A single IP address may appear across **multiple rows**

Each row represents data from a **different integration**

- Active Discovery
- Infrastructure Integration (SSH / API)
- SNMP etc.

This allows users to:

- Compare data from multiple sources
- Clearly understand **which integration discovered which details**
- Avoid confusion caused by duplicated IP entries

5. Common Actions on IP Page

Al though IP data is read-only, users have the following actions:

Available Actions:


Refresh : Reload the latest scan data

Manage Columns : Show or hide table columns (session-based)

Export : Download IP data for reporting or audits

No import or manual modification is allowed at the IP level.

6. IP Overview Tab

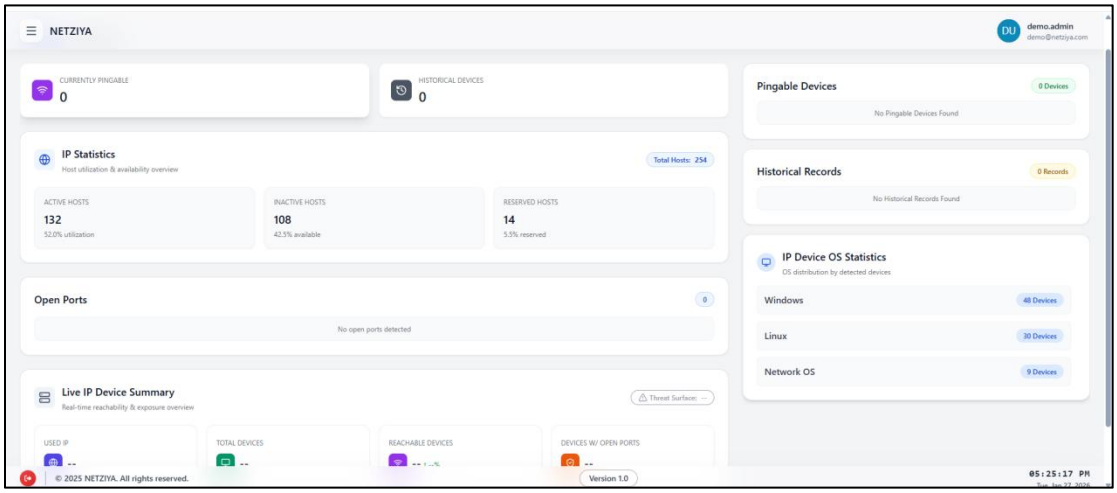

Pingable IP Count

- Number of IPs responding to ping
- Helps assess network reachability

Historical IP Count

- Tracks IP changes over time
- Useful for trend analysis and audits

IP Statistics

- Total IPs in the subnet
- Used vs unused IPs
- Overall IP utilization

These cards give a **quick health snapshot** of the subnet.

7. Breadcrumb Navigation


Breadcrumbs are available at the top of the page:

Home → EV → Organization → Site → Subnet → IP

This allows users to:

- Quickly move back to Subnet, Site, or Organization
- Maintain context at all times

IF VPN IS CONFIGURED ON SITE AND SUBNET

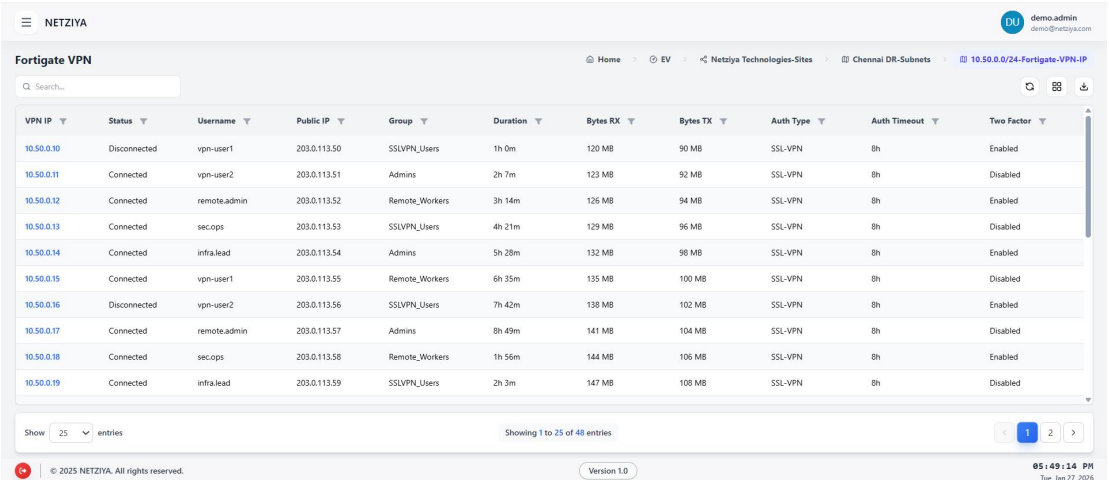

When a user selects **VPN Insights** at the subnet level, Netziya redirects to the **VPN IP page**.

The VPN IP page is **read-only** and is designed for monitoring, auditing, and troubleshooting VPN user activity.

Each row in the table represents a **VPN-assigned IP address** along with detailed session and authentication information retrieved from the VPN integration (e.g., FortiGate VPN).

The table includes the following key fields:

Core Identification

- **VPN IP**
  Internal IP address assigned to the VPN user.
- **Username**
  Authenticated VPN user associated with the IP.
- **Group**
  VPN user group or policy group (e.g., SSLVPN_Users, Admins, Remote_Workers).

Connection & Session Status

- **Status**
  Indicates whether the VPN session is currently **Connected** or **Disconnected**.
- **Duration**
  Total active session time for the VPN connection.
- **Auth Type**
  VPN authentication method used (e.g., SSL-VPN).
- **Auth Timeout**
  Configured authentication session timeout value.
- **Two-Factor Authentication**
  Indicates whether MFA / two-factor authentication is **Enabled** or **Disabled** for the session.

Network & Traffic Details

- **Public IP**
  Source public IP address from which the VPN user is connected.
- **Bytes RX**
  Total data received by the VPN client.
- **Bytes TX**
  Total data transmitted by the VPN client.

These metrics help administrators understand **bandwidth usage and session behavior** per VPN user.

Page Controls

On the VPN IP page, users can:

- **Refresh** data manually
- **Manage columns** (session-based)
- **Export** VPN IP data for reporting or audits

No add, edit, or delete actions are available on this page to ensure data integrity.

8. Summary

The IP Address page enables users to:

- View all scanned IPs under a subnet
- Understand device details at IP level
- Compare data from multiple integrations
- Identify open ports and exposed services
- Monitor scan status and OS information
- Export IP data for compliance and reporting
- Analyze subnet health through overview metrics

Endpoint Visibility (EV) – IP History Page User Guide

1. Navigating to the IP History Page

The **IP History page** is the **last and deepest level** in the EV navigation hierarchy:

Organization → Site → Subnet → IP → IP History

Steps:

- Open **Endpoint Visibility (EV)**
- Select an **Organization**
- Navigate to **Network**
- Select a **Site**
- Click on a **Subnet**
- Click on an **IP address**
- Select **IP History**

You will be redirected to the **IP History page** for the selected IP address.

2. Purpose of the IP History Page

The IP History page is designed to provide **historical visibility** for a **specific IP address**.

What this page does:

- Stores **historical scan records** of an IP
- Shows how IP data changes over time
- Preserves visibility across **multiple integrations**
- Supports **audit, compliance, and investigation use cases**

This page is **read-only** and does **not allow editing or configuration**.

3. Available Actions

Although the IP History page is read-only, users can perform the following actions:

Refresh

- Reloads the latest historical records
- Useful after a new scan cycle completes

Manage Columns

- Show or hide columns based on preference
- Rearrange columns for better analysis

- Works on a **session basis**

Export

- Export IP history data
- Useful for audits, reports, and investigations

4. Breadcrumb Navigation


Breadcrumbs are available at the top of the page:

Home → EV → Organization → Site → Subnet → IP → IP History

This allows users to:

- Navigate back to IP, Subnet, Site, or Organization
- Maintain full context while investigating history

IF VPN IS CONFIGURED ON SITE ,SUBNET AND IP

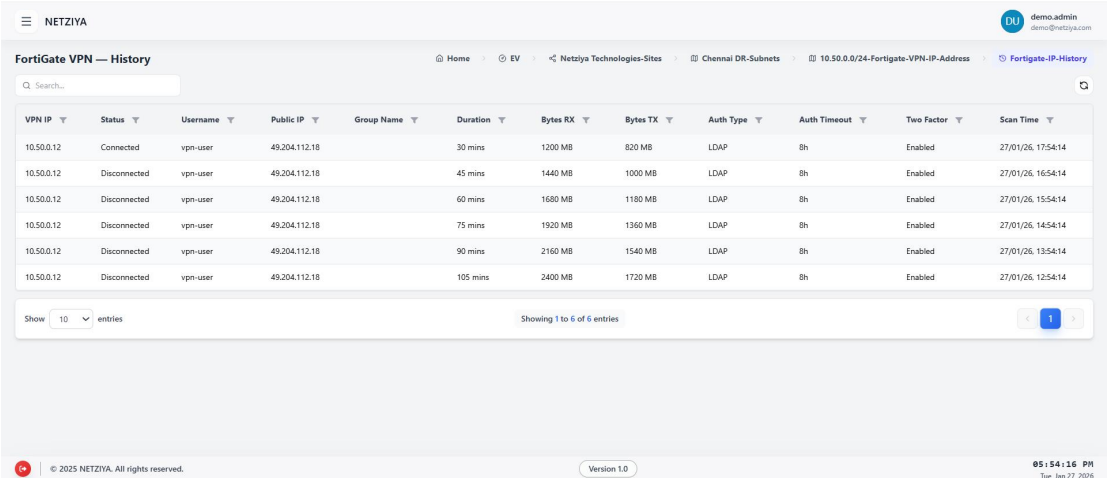

When a user clicks on a **VPN IP address** from the VPN IP table, the system automatically redirects to the **VPN IP History page**.

The VPN IP History page displays the **complete historical record** for the selected VPN IP address, including:

- Past VPN sessions
- Authentication details
- Connection and disconnection events
- Integration-specific scan history
- User and group associations over time

This page represents the **deepest visibility level** in VPN telemetry and is intended for **auditing, investigation, and compliance analysis**.

Navigation Flow

Organization → Site → Subnet → VPN Insights → VPN IP → VPN IP History

Summary

The IP History page enables users to:


- View complete historical records for a specific IP
- Track changes across scans and integrations
- Analyze open port evolution
- Validate scan consistency
- Export historical data for reporting
- Perform audits and forensic investigations

This page acts as the **historical audit layer** of Endpoint Visibility.

Endpoint Visibility – Reports Guide

When the user clicks **Endpoint Visibility** from the sidebar, the **Workspace** page opens showing the list of available organizations (entities).

- Clicking on an **Organization name** in the table opens a quick action popup.
- From this popup, selecting **Report** navigates the user to the **Reports Workspace** for that organization.

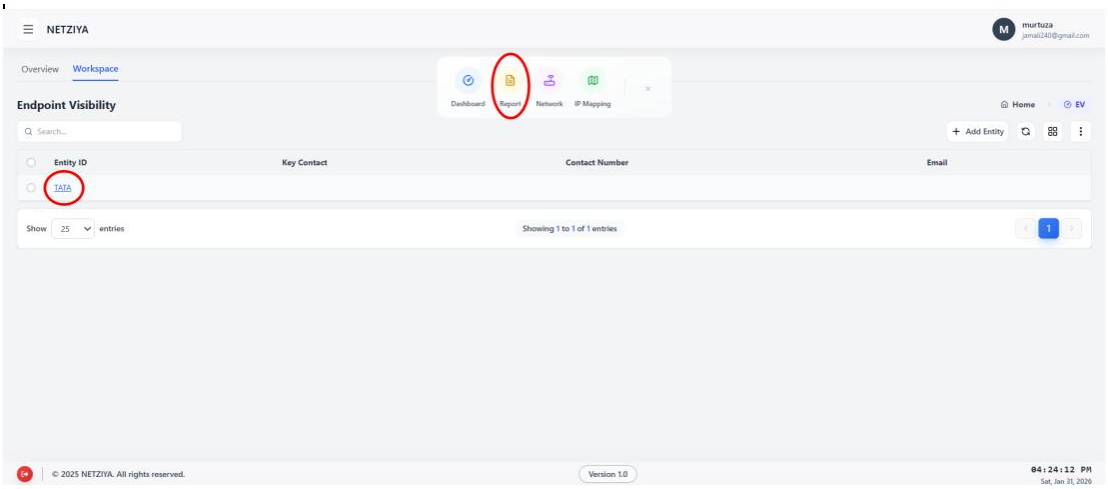


Reports Workspace

- The Reports Workspace allows users to **view, generate, export, and schedule network & security reports** for the selected organization.
- By default, the **Subnet Utilization Report** is opened when the Reports page loads.

Available Report Types

Users can switch between different reports using the report tabs, including:

- Subnet Utilization
- Scan Summary Report
- Port Exposure & Risk
- IP Address Utilization
- MAC Address Report
- OS Summary Report
- VPN Summary Report
- Additional reports are available under **More Reports**.

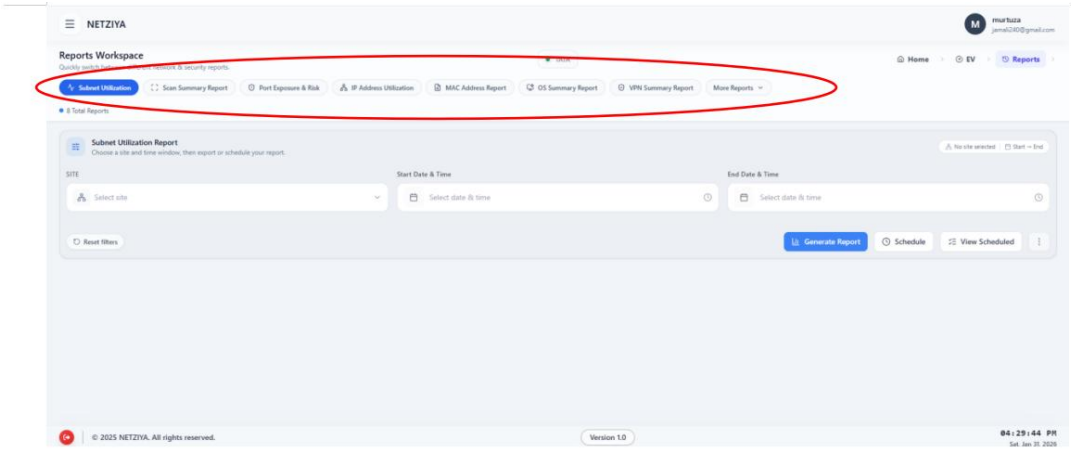


Accessing the Report

- From the sidebar, click **Endpoint Visibility**.
- The Endpoint Visibility page opens showing the list of entities.
- Click on the **Entity name (Organization)** from the table.
- A quick-action popup appears—select **Report**.
- The **Reports Workspace** opens.
- By default, the **Subnet Utilization Report** is selected and displayed.


Generating the Report

- Select a **Site** from the Site dropdown.
- Select a **Subnet** from the Subnet dropdown. (if it there)
- Choose a **Start Date & Time**.
- Choose an **End Date & Time**.
- Click **Generate Report**.

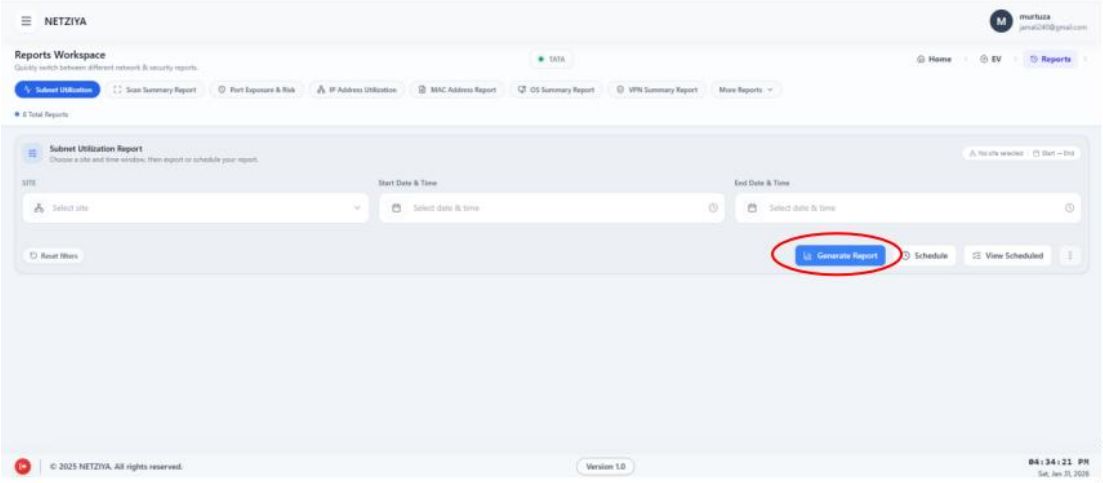


After Report Generation

- The **filter panel automatically hides** to provide a clear view of the report.
- A **Show Filters** option appears on the right to reopen the filter panel when needed.
- The report table is populated with subnet utilization data.

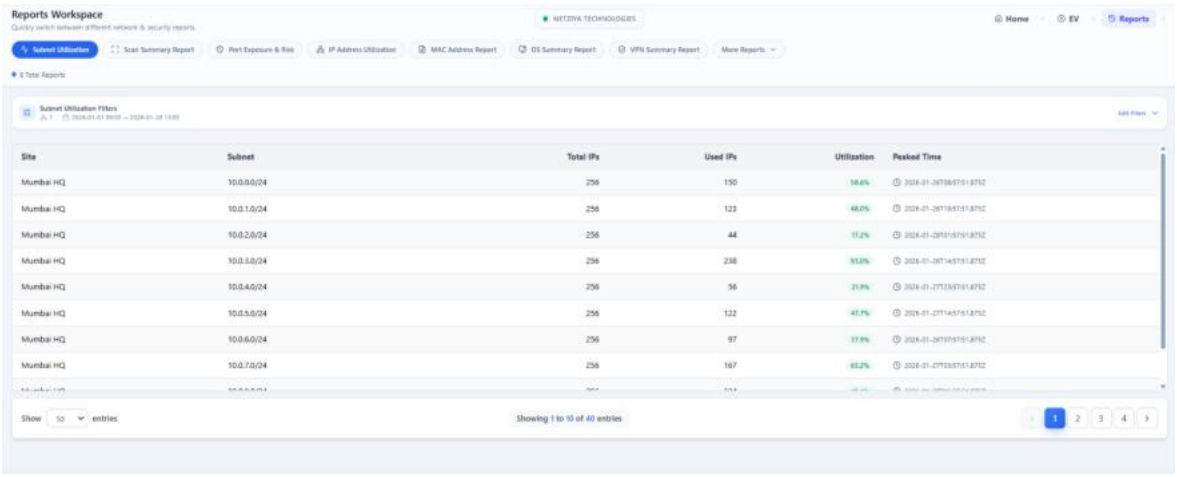


Scheduling the Report

- Click the **Schedule** button (enabled only after the report is generated).

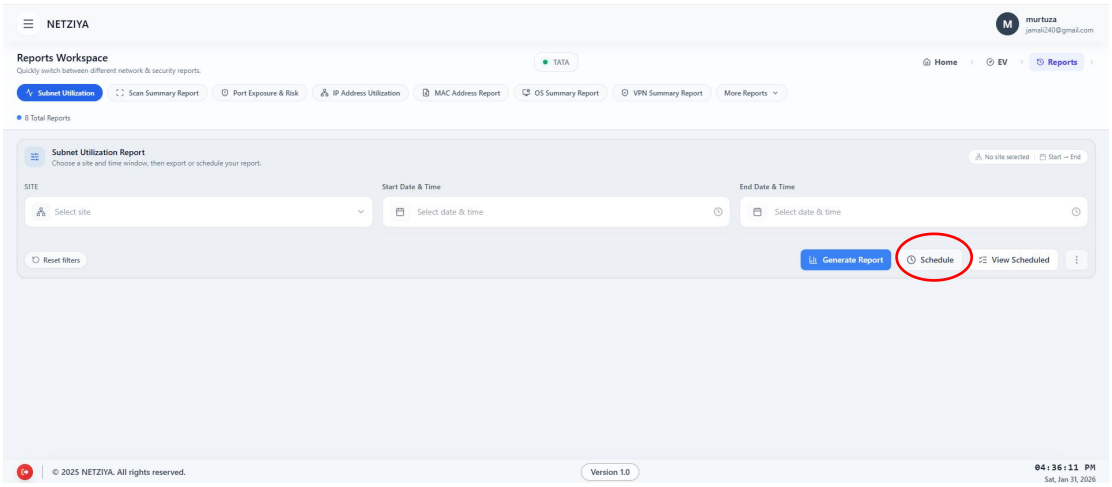

A scheduling form opens where you can:

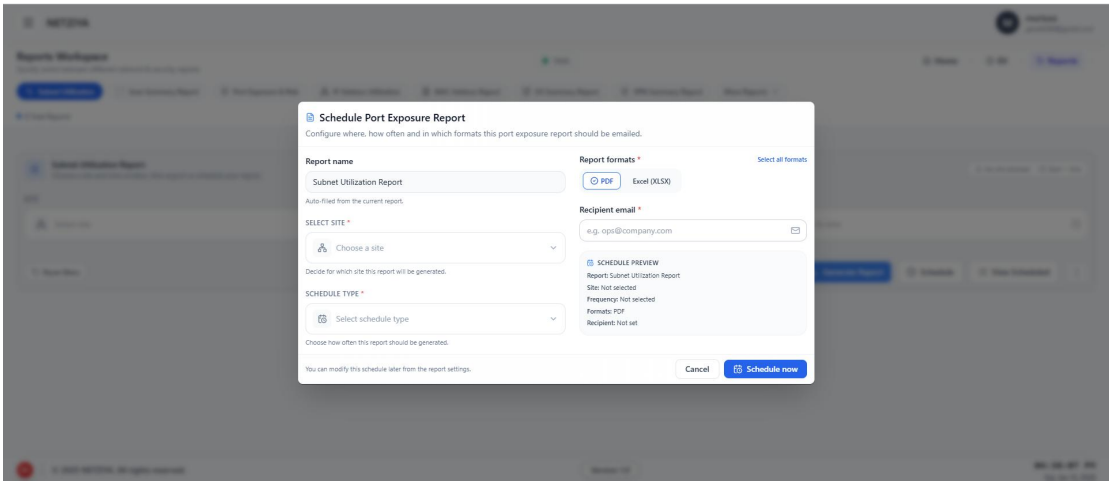


- Select **report format** (PDF / Excel).
- Choose **recipient email**.
- Set **schedule frequency**.
- Click **Schedule Now** to save.

Important Notes:

SMTP must be configured to email scheduled reports.
The Schedule option remains disabled until a report is generated at least once.

Viewing Scheduled Reports

Click **View Scheduled** to open the scheduling table.

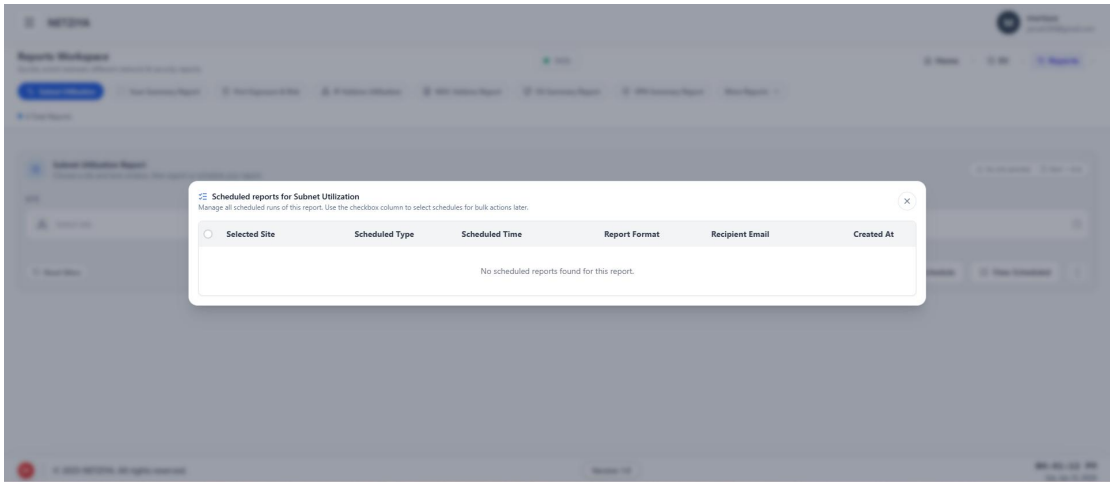

This table displays:

- Selected site
- Schedule type
- Scheduled time
- Report format
- Recipient email
- Users can **delete scheduled reports** from this view.

Exporting the Report

Click the **three-dot (:) menu** on the report

Choose to export the current report in:

- **Excel**
- **PDF**
- **HTML**

Note : Three dot enable only on genrate of report user able to dawonload data on **Generate** of report only


Endpoint Visibility – Dashboard Section Guide

Overview

The **Dashboard section** provides a real-time, visual overview of network utilization and device distribution across the organization. It helps administrators quickly understand IP usage patterns, device spread, and subnet health without generating reports.

How to Access the Dashboard

1. Open the **left navigation bar**
2. Click on **Endpoint Visibility**
3. The **Endpoint Visibility workspace** opens
4. Click on the organization Name.
5. A **quick action popup** appears.
6. Click on **Dashboard**.
7.

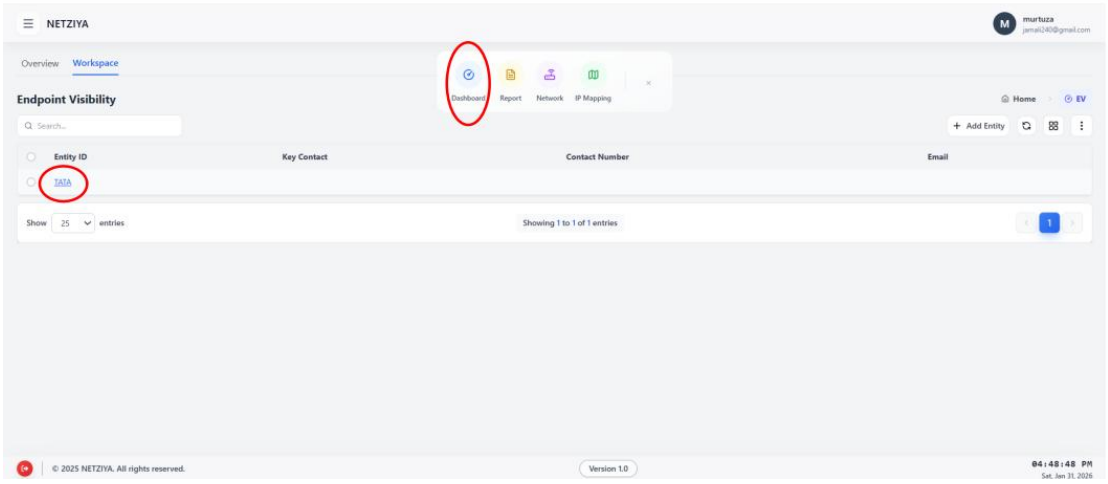

8. The dashboard workspace loads for the selected organization.

Note: By default, the Subnet Utilization Dashboard opens as the first dashboard.

Default Dashboard


What This Dashboard Shows

The **Subnet Utilization , Unique IP Analysis , Device Distribution Dashboard** provides a centralized view of IP usage across all sites and subnets within the organization.


It displays

- Overall subnet-wise IP utilization
- Used vs available IP addresses
- VLAN association per subnet
- Usage percentage with progress indicators
- Site-level grouping of subnets


Subnet Utilization Dashboard

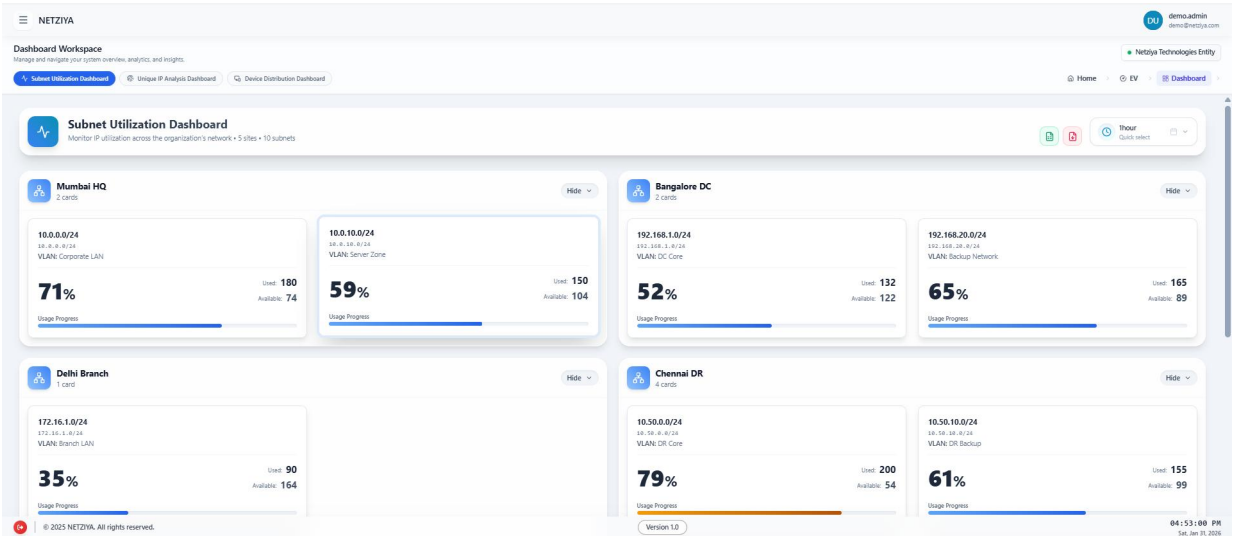

Unique IP Analysis

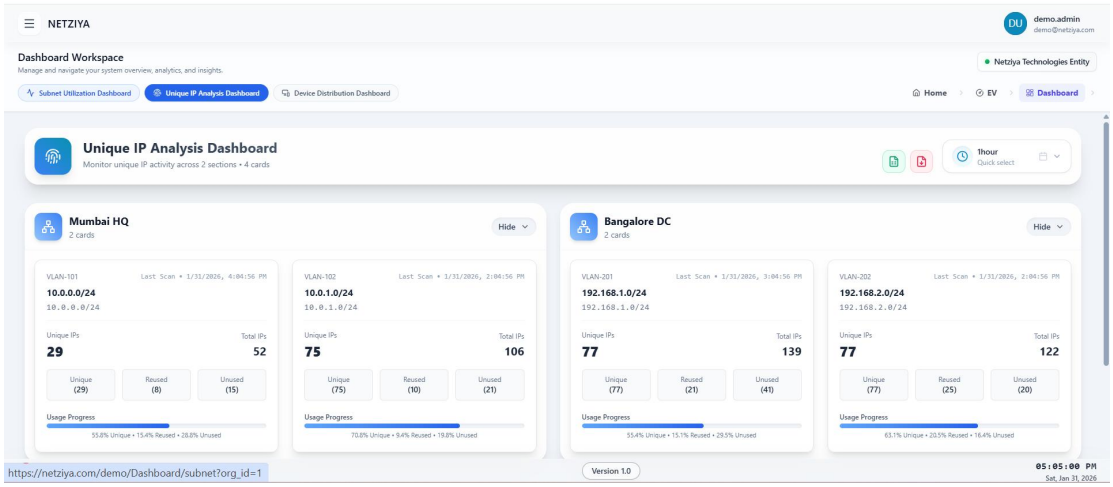

Device Distribution

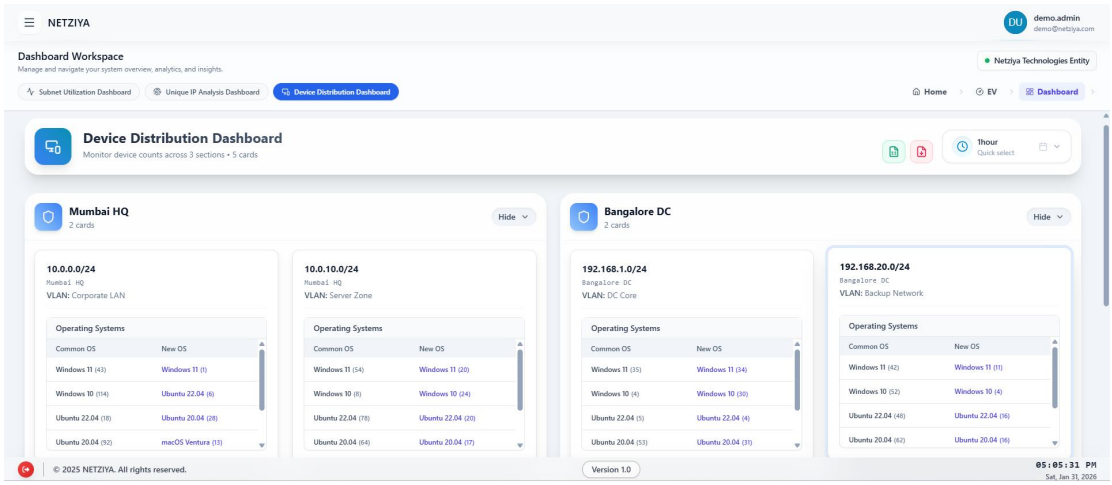

Dashboard Layout

1. Organization-Level View

- Displays **all sites** (e.g., Mumbai HQ, Bangalore DC, Delhi Branch, Chennai DR)
- Each site contains **subnet cards**

Every card shows:

- Subnet CIDR
- VLAN information
- Utilization percentage
- Used IPs
- Available IPs
- Progress bar for quick visual reference

This view gives a **high-level snapshot** of IP usage across the entire organization.

2. Time Filter (Top Right)

Available options:

- 1 hour (default)
- 6 hours
- 12 hours
- 1 day
- Custom

Custom Time Range

- Opens a popup card
- Select:
- Start Date & Time
- End Date & Time
- Click **Apply Time Range**

Subnet Drill-Down (Inner Card View)

Clicking on any **subnet card** opens a detailed inner view.

Inner Card Includes:

1. Usage Trend Graph

- Line chart showing IP usage over time
- Hovering shows exact usage at a specific timestamp
- Reflects the currently selected time range

2. Export Options

- Excel
- PDF

These exports apply **only to the selected subnet**, not the entire dashboard.

3. Devices in Subnet Table


Displays detailed device-level information, including:

- IP Address
- Status (Used / Available)
- Hostname
- Open Ports
- Operating System
- Integration source (e.g., Active Discovery)
- Risk Level


This table helps identify:

- High-usage devices
- Risk-prone endpoints
- OS and port exposure within a subnet


Subnet Utilization Dashboard

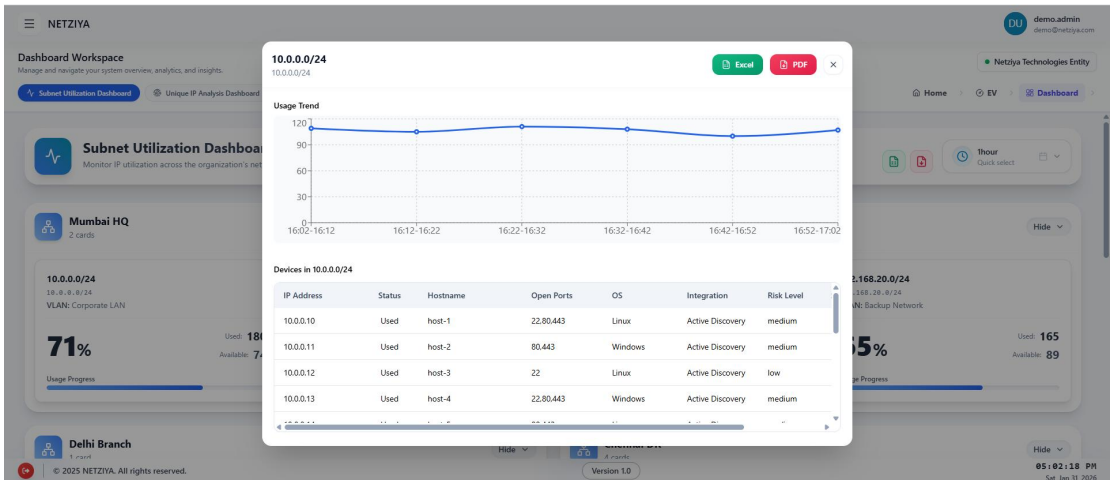

Unique IP Analysis

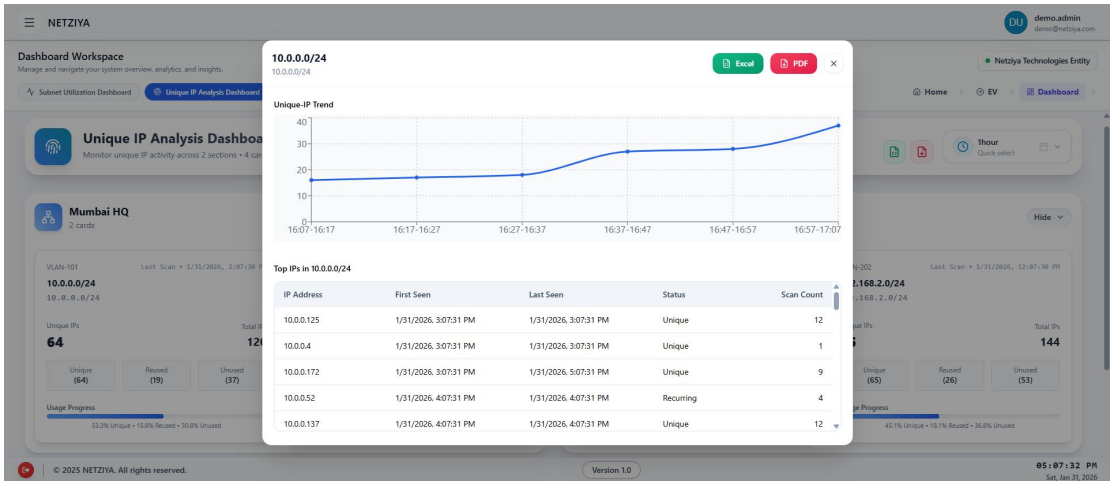

Device Distribution

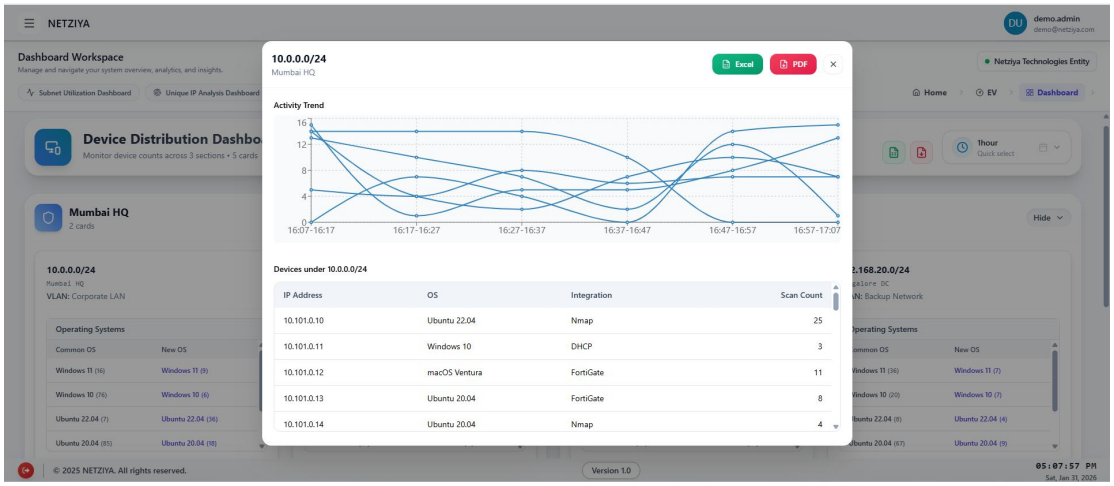

Key Notes & Behavior

- **Default Time Filter:** 1 hour
- **Dashboard Export:** Overall data only
- **Inner Card Export:** Subnet-specific data
- **Time Filter Behavior:** Applies globally across the dashboard
- **Inner Card Layout:** Graph + export buttons + detailed table
- **UI Consistency:** Filters and exports behave the same as reports

Netziya Agent – Activation & Management User Guide

In addition to the four network-based engines, Netziya includes its **own native Endpoint Agent**, which acts as the **fifth engine** in the Endpoint Visibility platform.


The Netziya Agent provides **deep endpoint-level visibility** by securely collecting system and performance data directly from user machines and servers where the agent is installed.

1. Accessing the Netziya Agent Page

The Netziya Agent page allows users to **activate, manage, and monitor the Netziya Agent** installed on endpoints.

Steps:

- Log in to **Netziya**
- From the **sidebar menu**, click on **Netziya Agent**
- You will be redirected to the **Agent Management page**

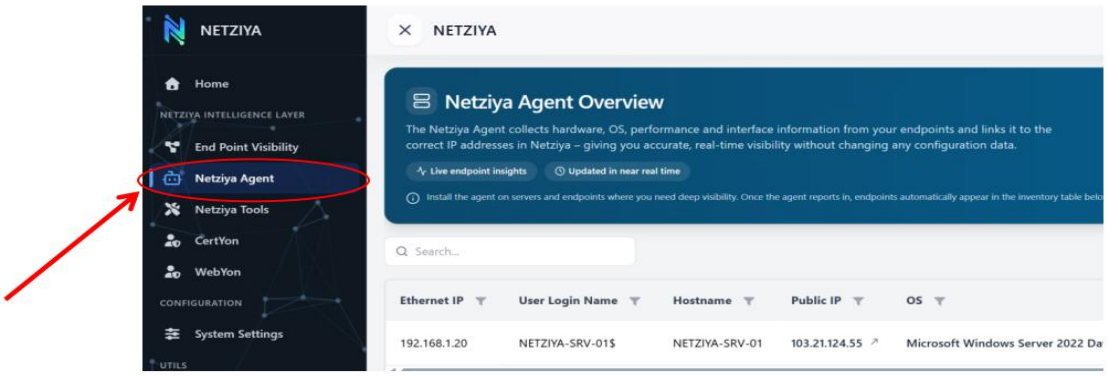

2. Supported Platforms


The Netziya Agent is supported on:

1. **Microsoft Windows**
2. **Linux**

The agent operates on:

- Devices connected to the **corporate network**
- Devices connected via **VPN**
- Remote employee systems

Important:
The Netziya Agent reports data **only when it is explicitly installed** on the endpoint. No data is collected from devices without the agent.

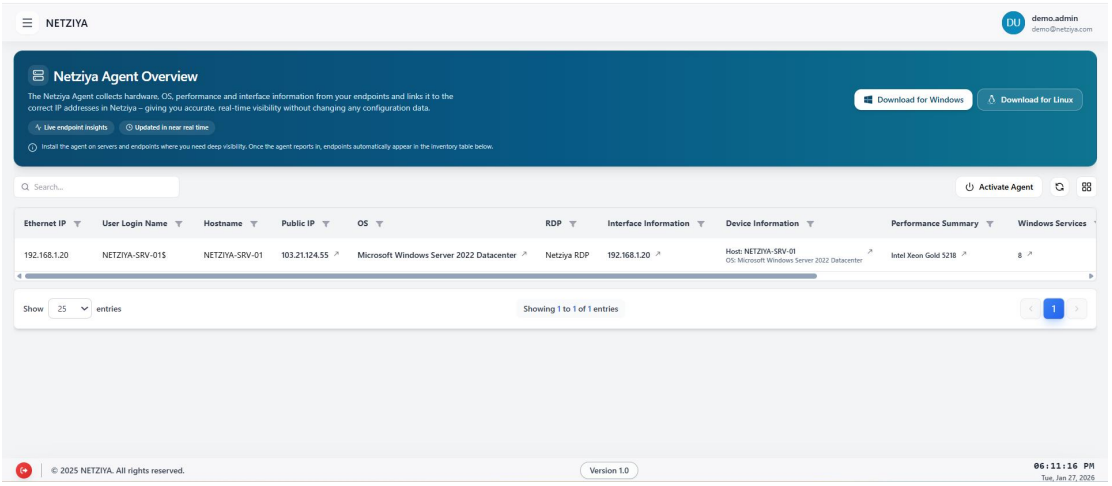

3. Activating the Netziya Agent

To activate the agent:

Steps:

1. Click the **Activate Agent** button
2. An **Agent Activation Form** will open
3. The form is **pre-filled by Netziya** with the following details:

- Domain Name
- Primary DNS
- Secondary DNS
- Certificate Name

- Hostname (FQDN)
- API Key (used for secure communication)

These values are generated and managed by Netziya to ensure secure and accurate agent communication.

4. Click **Submit**

4. Agent Configuration & Communication

After submission:

- The configuration is **saved securely on the Netziya server**
- The Netziya Agent establishes communication with the platform
- Agent status changes to **Active**

This enables continuous data collection and reporting from the endpoint.

5. Deactivating the Netziya Agent

Once the agent is active, the **Activate Agent** button changes to **Deactivate Agent**.

Steps:

- Click **Deactivate Agent**
- A confirmation prompt appears
- Confirm the deactivation

After confirmation:

- Agent communication with Netziya stops
- Agent status changes to **Inactive**
- No further data is collected until reactivated