Schema documentation for component_schema.xsd

august 31, 2016

Table of Contents

Namespace: ""

Schema(s)

Main schema `component_schema.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`
	element form default:	`qualified`

Included schema `common_elements.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`
	element form default:	`qualified`

Included schema `common_types.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`
	element form default:	`qualified`

Included schema `channel_schema.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`
	element form default:	`qualified`

Included schema `command_schema.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`
	element form default:	`qualified`

Included schema `event_schema.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`
	element form default:	`qualified`

Included schema `internal_interface_schema.xsd`

Namespace	No namespace	
Properties	attribute form default:	`unqualified`

	element form default: `qualified`

Included schema `parameters_schema.xsd`

Namespace	No namespace
Properties	attribute form default: `unqualified` element form default: `qualified`

Element(s)

Element `component`

Namespace	No namespace
Annotations	`Component root tag.`
Diagram	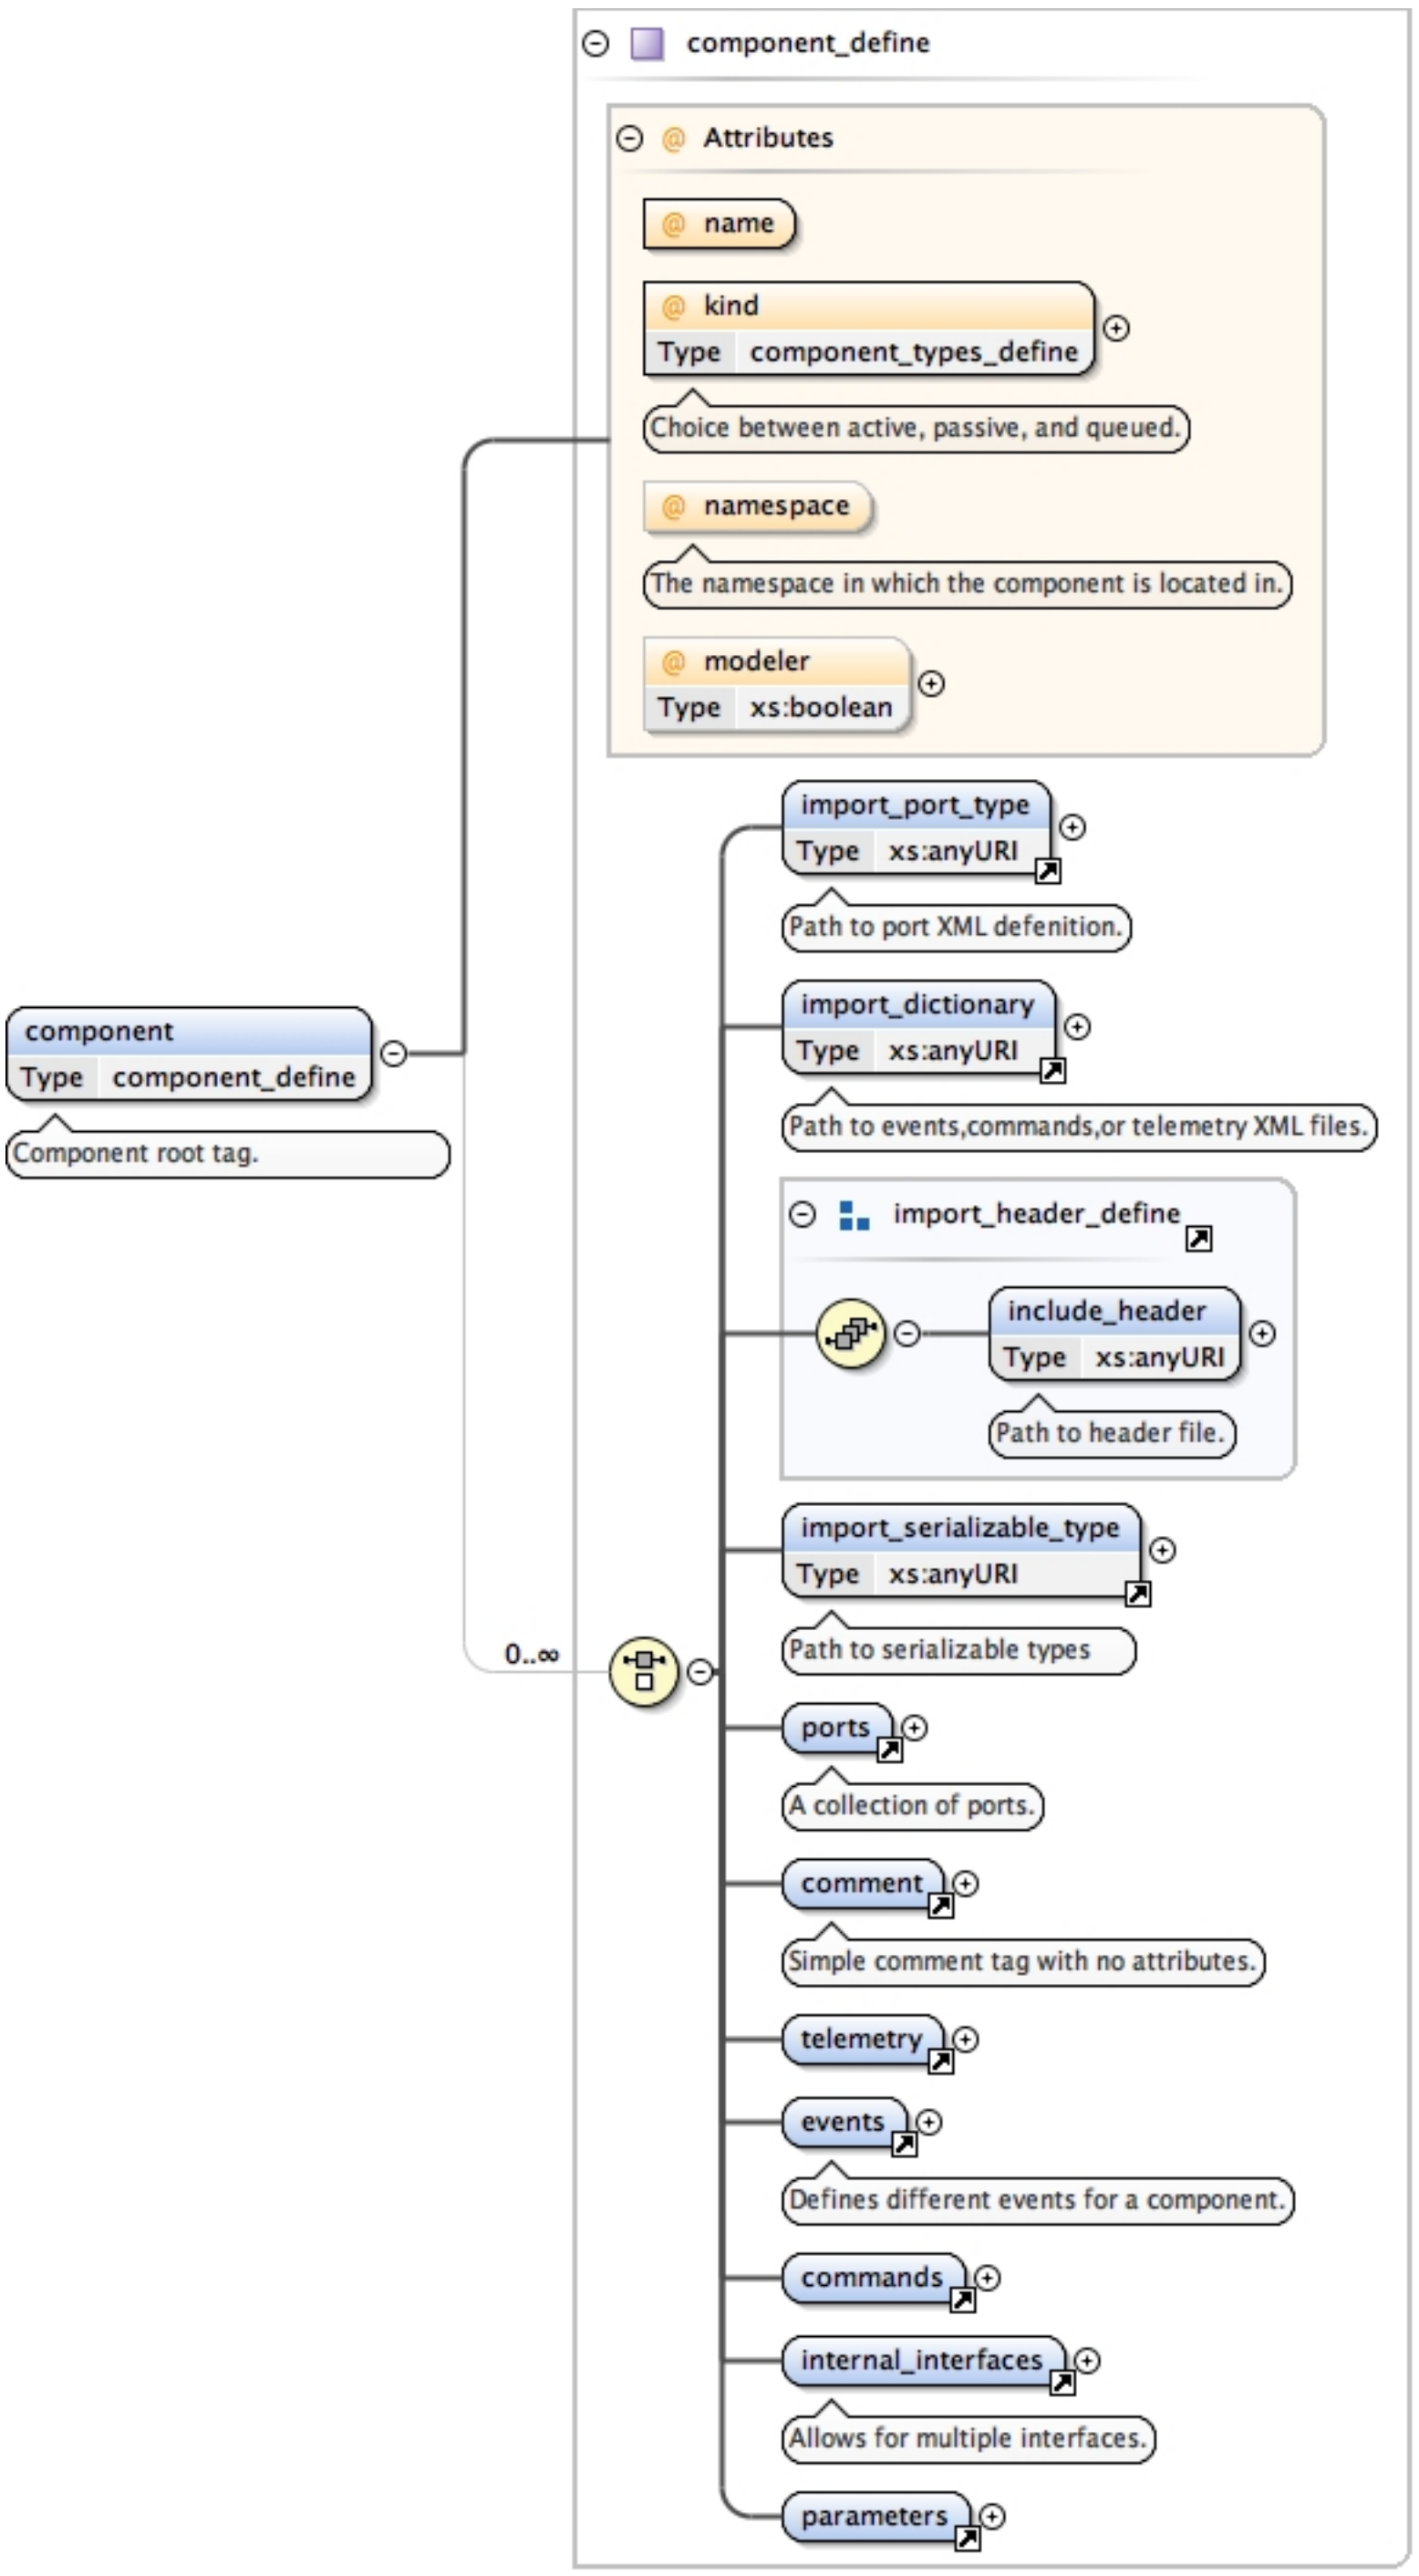

<table>
<tr><td>Type</td><td>component_define</td></tr>
<tr><td>Properties</td><td>content: complex</td></tr>
<tr><td>Model</td><td>import_port_type | import_dictionary | (include_header) | import_serializable_type | ports | comment | telemetry | events | commands | internal_interfaces | parameters</td></tr>
<tr><td>Children</td><td>commands, comment, events, import_dictionary, import_port_type, import_serializable_type, include_header, internal_interfaces, parameters, ports, telemetry</td></tr>
<tr><td>Instance</td><td><pre>
<component kind="" modeler="" name="" namespace="">
  <import_port_type>{1,1}</import_port_type>
  <import_dictionary>{1,1}</import_dictionary>
  <include_header>{1,1}</include_header>
  <import_serializable_type>{1,1}</import_serializable_type>
  <ports>{1,1}</ports>
  <comment>{1,1}</comment>
  <telemetry telemetry_base="">{1,1}</telemetry>
  <events event_base="">{1,1}</events>
  <commands opcode_base="">{1,1}</commands>
  <internal_interfaces>{1,1}</internal_interfaces>
  <parameters opcode_base="" parameter_base="">{1,1}</parameters>
</component>
</pre></td></tr>
<tr><td>Attributes</td><td><table>
<tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr>
<tr><td><b>kind</b></td><td>component_types_define</td><td>required</td><td></td></tr>
<tr><td></td><td colspan="3">Choice between active, passive, and queued.</td></tr>
<tr><td><b>modeler</b></td><td>xs:boolean</td><td>optional</td><td></td></tr>
<tr><td><b>name</b></td><td></td><td>required</td><td></td></tr>
<tr><td><b>namespace</b></td><td></td><td>optional</td><td></td></tr>
<tr><td></td><td colspan="3">The namespace in which the component is located in.</td></tr>
</table></td></tr>
<tr><td>Source</td><td><pre>
<xs:element name="component" type="component_define">
  <xs:annotation>
    <xs:documentation>Component root tag.</xs:documentation>
  </xs:annotation>
</xs:element>
</pre></td></tr>
</table>

Element `import_port_type`

<table>
<tr><td>Namespace</td><td>No namespace</td></tr>
<tr><td>Annotations</td><td>Path to port XML defenition.</td></tr>
<tr><td>Diagram</td><td>
import_port_type
Type xs:anyURI
xs:anyURI
Path to port XML defenition.
Built-in primitive type. The anyURI datatype represents a Uniform Resource Identifier Reference (URI).

</td></tr>
<tr><td>Type</td><td>xs:anyURI</td></tr>
<tr><td>Properties</td><td>content: simple</td></tr>
<tr><td>Used by</td><td>Complex Type component_define</td></tr>
<tr><td>Source</td><td><pre>
<xs:element name="import_port_type" type="xs:anyURI">
  <xs:annotation>
    <xs:documentation>Path to port XML defenition.</xs:documentation>
  </xs:annotation>
</xs:element>
</pre></td></tr>
</table>

Element `import_dictionary`

<table>
<tr><td>Namespace</td><td>No namespace</td></tr>
<tr><td>Annotations</td><td>Path to events,commands,or telemetry XML files.</td></tr>
<tr><td>Diagram</td><td>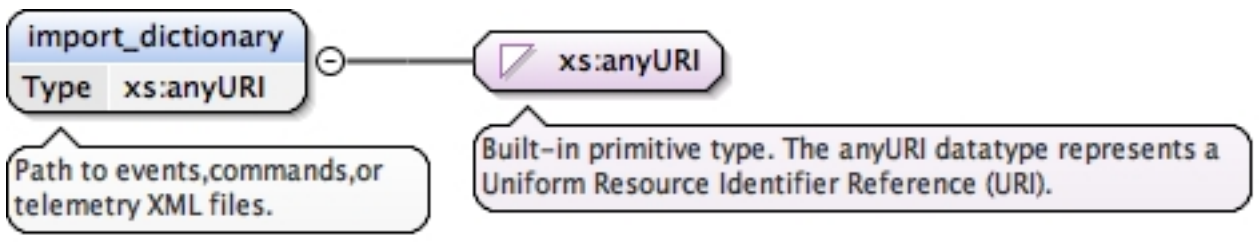
import_dictionary
Type xs:anyURI
xs:anyURI
Path to events,commands,or telemetry XML files.
Built-in primitive type. The anyURI datatype represents a Uniform Resource Identifier Reference (URI).

</td></tr>
<tr><td>Type</td><td>xs:anyURI</td></tr>
<tr><td>Properties</td><td>content: simple</td></tr>
<tr><td>Used by</td><td>Complex Type component_define</td></tr>
</table>

Source	<xs:element name="import_dictionary" type="xs:anyURI">
	  <xs:annotation>
	    <xs:documentation>Path to events,commands,or telemetry XML files.</xs:documentation>
	  </xs:annotation>
	</xs:element>

Element `import_header_define / include_header`

Namespace	No namespace
Annotations	Path to header file.
Diagram	 include_header Type xs:anyURI xs:anyURI Path to header file. Built-in primitive type. The anyURI datatype represents a Uniform Resource Identifier Reference (URI).
Type	xs:anyURI
Properties	content: simple
Source	<xs:element name="include_header" type="xs:anyURI"> <xs:annotation> <xs:documentation>Path to header file.</xs:documentation> </xs:annotation> </xs:element>

Element `import_serializable_type`

Namespace	No namespace
Annotations	Path to serializable types
Diagram	 import_serializable_type Type xs:anyURI xs:anyURI Path to serializable types Built-in primitive type. The anyURI datatype represents a Uniform Resource Identifier Reference (URI).
Type	xs:anyURI
Properties	content: simple
Used by	Complex Type component_define
Source	<xs:element name="import_serializable_type" type="xs:anyURI"> <xs:annotation> <xs:documentation>Path to serializable types</xs:documentation> </xs:annotation> </xs:element>

Element `ports`

Namespace	No namespace
Annotations	A collection of ports.
Diagram	 ports 1..∞ port A collection of ports. Element that specifies eternal interfaces that can connect and be connected to.
Properties	content: complex
Used by	Complex Type component_define
Model	port+
Children	port
Instance	<ports> <port data_type="" full="" kind="" max_number="" name="" priority="" role="">{1,unbounded}</port> </ports>

Source	<xs:element name="ports">
	  <xs:annotation>
	    <xs:documentation>A collection of ports.</xs:documentation>
	  </xs:annotation>
	  <xs:complexType>
	    <xs:sequence>

```
      <xs:element maxOccurs="unbounded" ref="port"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Element port

Namespace	No namespace
Annotations	Element that specifies eternal interfaces that can connect and be connected to.
Diagram	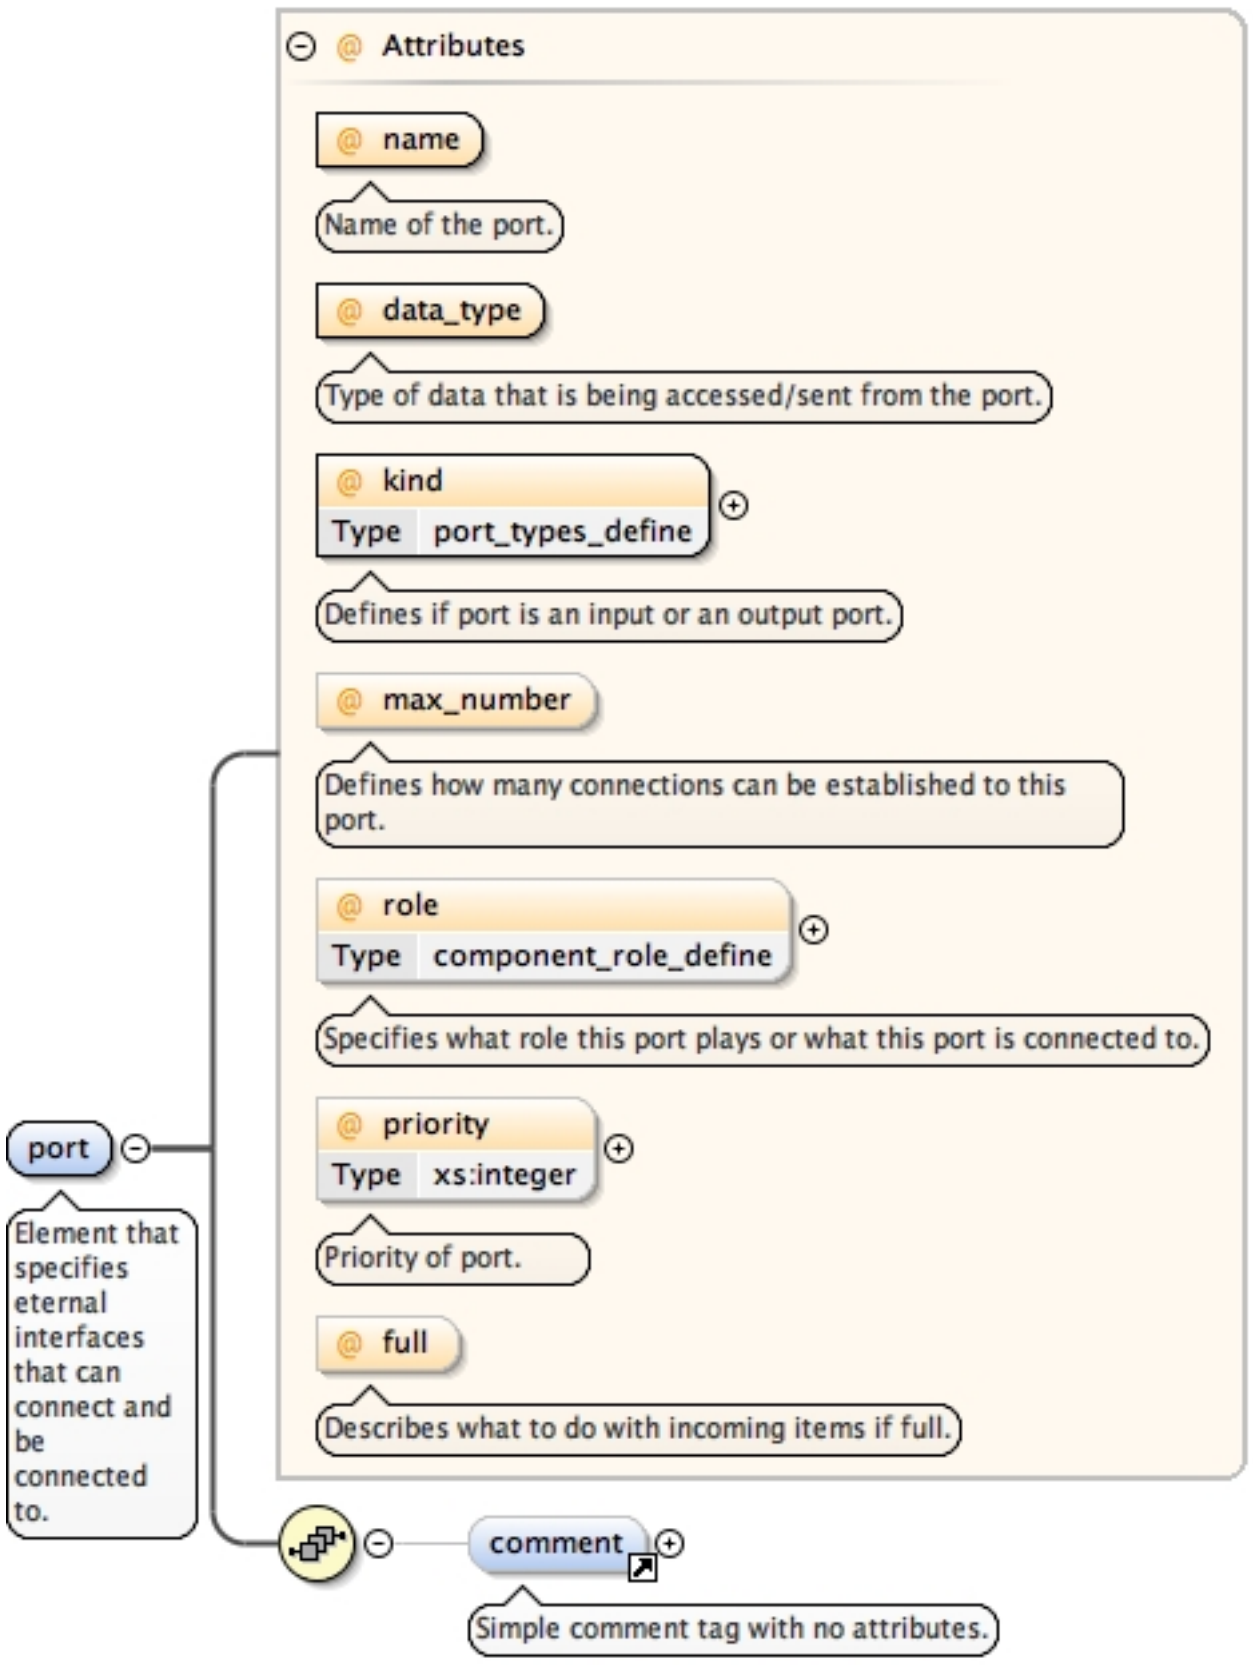 Attributes name Name of the port. data_type Type of data that is being accessed/sent from the port. kind Type port_types_define Defines if port is an input or an output port. max_number Defines how many connections can be established to this port. role Type component_role_define Specifies what role this port plays or what this port is connected to. priority Type xs:integer Priority of port. full Describes what to do with incoming items if full. port Element that specifies eternal interfaces that can connect and be connected to. comment Simple comment tag with no attributes.
Properties	content: complex
Used by	Element ports
Model	comment{0,1}
Children	comment
Instance	<port data_type="" full="" kind="" max_number="" name="" priority="" role=""> <comment>{0,1}</comment> </port>

Attributes

QName	Type	Use	
data_type		required	
	Type of data that is being accessed/sent from the port.		
full		optional	
	Describes what to do with incoming items if full.		
kind	port_types_define	required	
	Defines if port is an input or an output port.		
max_number		optional	
	Defines how many connections can be established to this port.		
name		required	
	Name of the port.		
priority	xs:integer	optional	
	Priority of port.		
role	component_role_define	optional	

QName	Type	Use	
	Specifies what role this port plays or what this port is connected to.		

Source

```
<xs:element name="port">
  <xs:annotation>
    <xs:documentation>Element that specifies eternal interfaces that can connect and be connected
 to.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" ref="comment"/>
    </xs:sequence>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Name of the port.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="data_type" use="required">
      <xs:annotation>
        <xs:documentation>Type of data that is being accessed/sent from the port.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="kind" use="required" type="port_types_define">
      <xs:annotation>
        <xs:documentation>Defines if port is an input or an output port.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="max_number">
      <xs:annotation>
        <xs:documentation>Defines how many connections can be established to this port.</
xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="role" type="component_role_define">
      <xs:annotation>
        <xs:documentation>Specifies what role this port plays or what this port is connected to.</
xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="priority" type="xs:integer">
      <xs:annotation>
        <xs:documentation>Priority of port.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="full">
      <xs:annotation>
        <xs:documentation>Describes what to do with incoming items if full.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element comment

Namespace	No namespace
Annotations	Simple comment tag with no attributes.
Diagram	 comment xs:string Simple comment tag with no attributes. Built-in primitive type. The string datatype represents character strings in XML.
Type	xs:string
Properties	content: simple
Used by	Elements: arg_define/arg, channel, command, event, external_arg_define/arg, parameter, port, return Complex Types: component_define, interface_define

Source

```
<xs:element name="comment" type="xs:string">
  <xs:annotation>
    <xs:documentation>Simple comment tag with no attributes.</xs:documentation>
  </xs:annotation>
</xs:element>
```

Element telemetry

Namespace	No namespace

Diagram	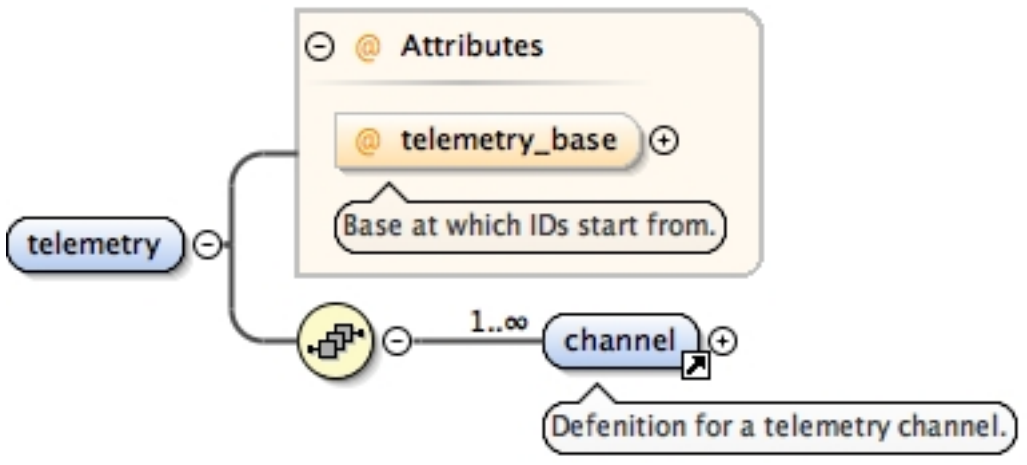 Attributes telemetry_base Base at which IDs start from. telemetry 1..∞ channel Defenition for a telemetry channel.
Properties	content: complex
Used by	Complex Type component_define
Model	channel+
Children	channel
Instance	<telemetry telemetry_base=""> <channel abbrev="" data_type="" format_string="" high_orange="" high_red="" high_yellow="" id="" low_orange="" lo channel> </telemetry>
Attributes	**QName** · **Type** · **Use** **telemetry_base** · base_code_define · optional Base at which IDs start from.

Source	<xs:element name="telemetry">
	  <xs:complexType>
	    <xs:sequence>
	      <xs:element maxOccurs="unbounded" ref="channel"/>
	    </xs:sequence>
	    <xs:attribute name="telemetry_base" type="base_code_define">
	      <xs:annotation>
	        <xs:documentation>Base at which IDs start from.</xs:documentation>
	      </xs:annotation>
	    </xs:attribute>
	  </xs:complexType>
	</xs:element>

Element channel

Namespace	No namespace
Annotations	Defenition for a telemetry channel.

<table>
<tr><td>Diagram</td><td>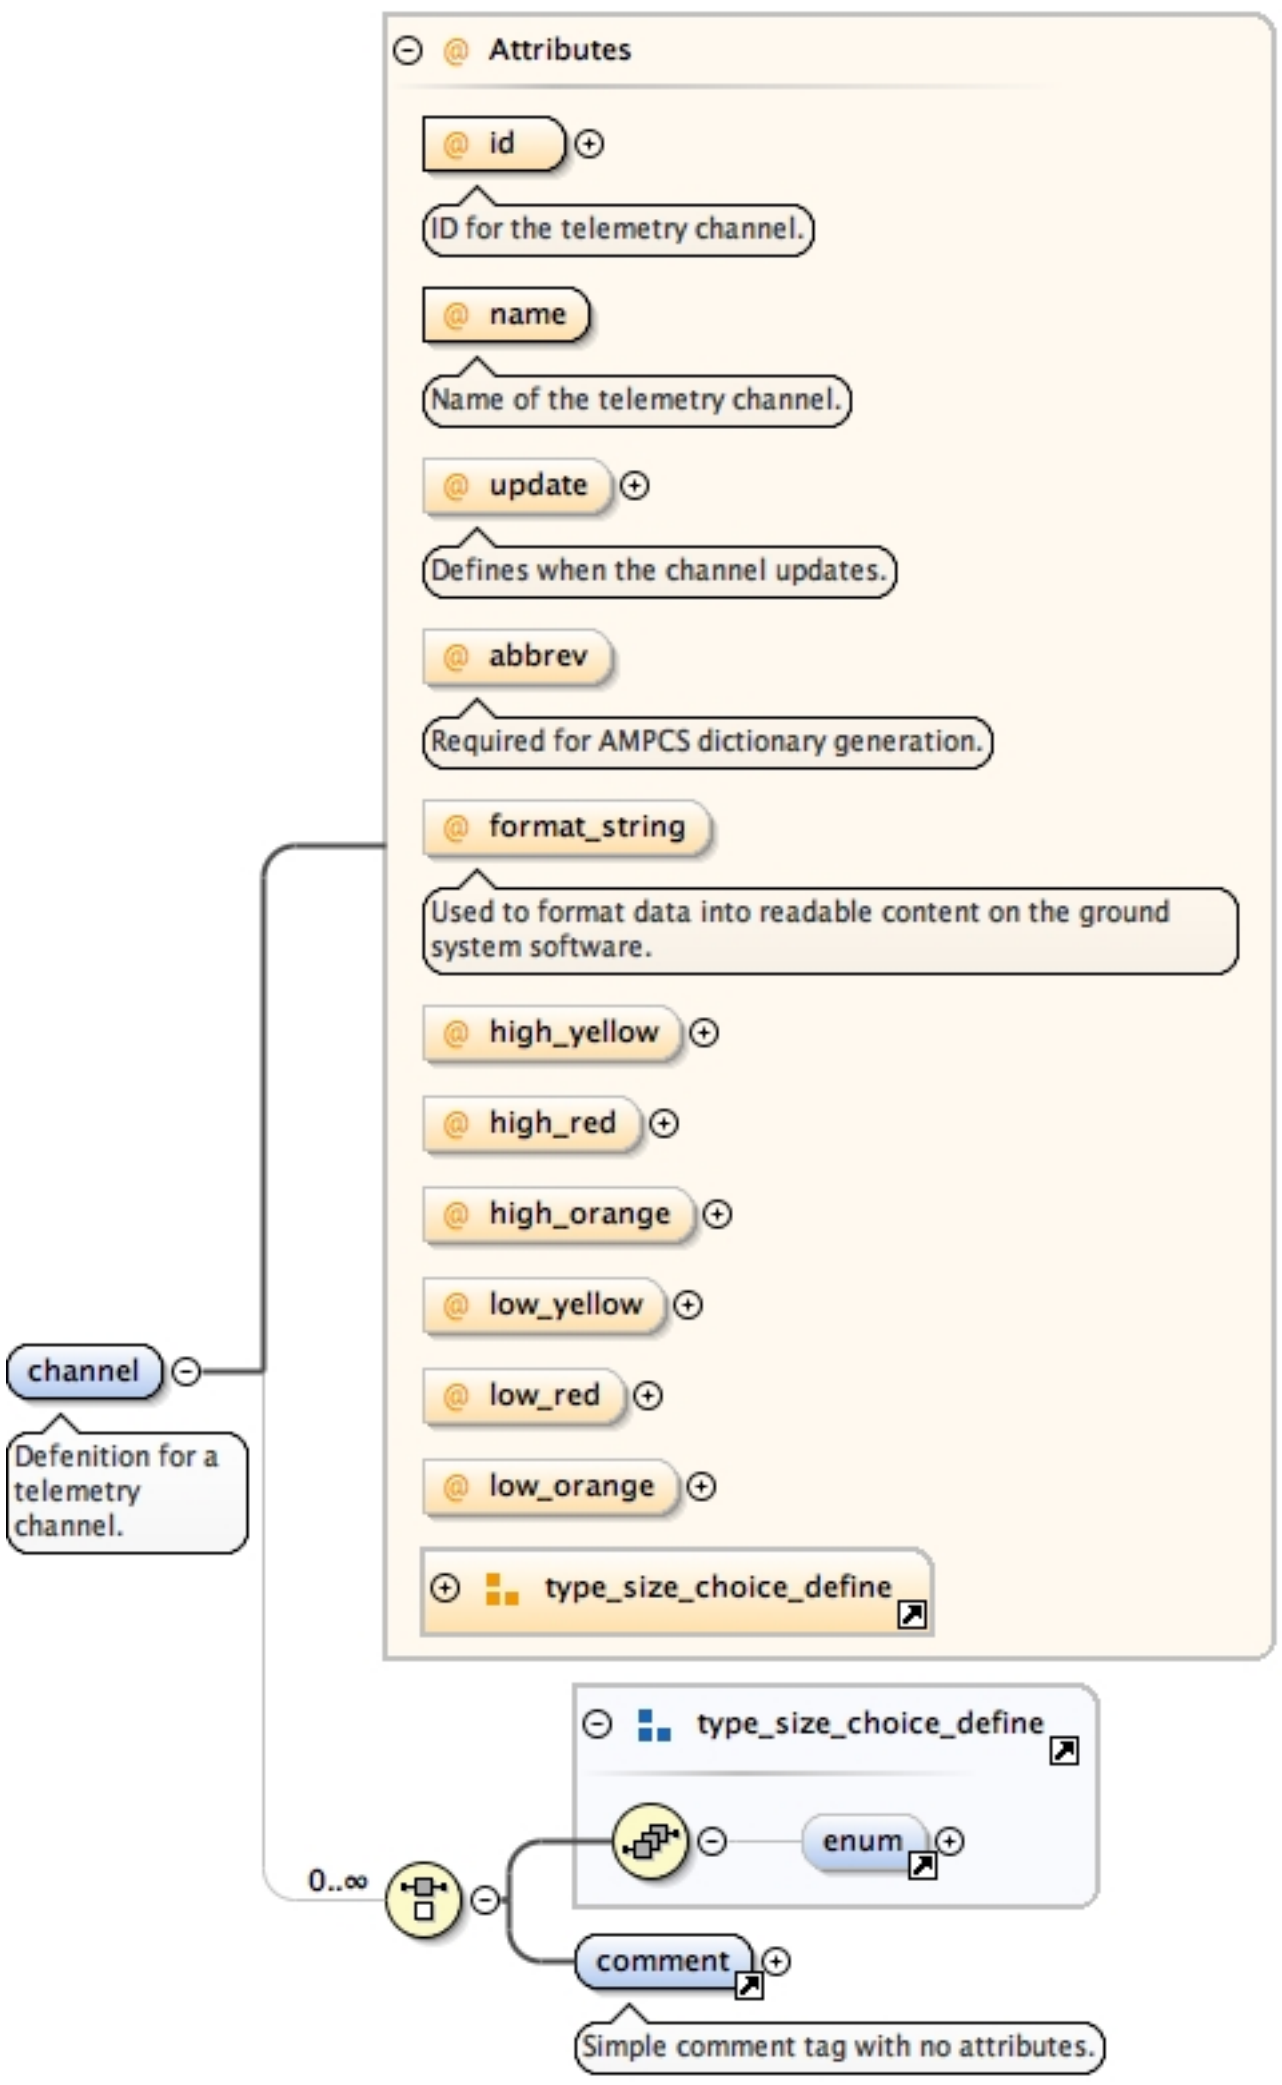
Attributes
id
ID for the telemetry channel.
name
Name of the telemetry channel.
update
Defines when the channel updates.
abbrev
Required for AMPCS dictionary generation.
format_string
Used to format data into readable content on the ground system software.
high_yellow
high_red
high_orange
low_yellow
low_red
low_orange
type_size_choice_define
channel
Defenition for a telemetry channel.
type_size_choice_define
enum
0..∞
comment
Simple comment tag with no attributes.

</td></tr>
<tr><td>Properties</td><td>content: complex</td></tr>
<tr><td>Used by</td><td>Element telemetry</td></tr>
<tr><td>Model</td><td>(enum{0,1}) | comment</td></tr>
<tr><td>Children</td><td>comment, enum</td></tr>
<tr><td>Instance</td><td><pre>&lt;channel abbrev="" data_type="" format_string="" high_orange="" high_red="" high_yellow="" id="" low_orange="" low_
  <enum name="">{0,1}</enum>
  <comment>{1,1}</comment>
</channel&gt;</pre></td></tr>
<tr><td>Attributes</td><td>
<table>
<tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr>
<tr><td><b>abbrev</b></td><td></td><td>optional</td><td></td></tr>
<tr><td></td><td colspan="3">Required for AMPCS dictionary generation.</td></tr>
<tr><td><b>data_type</b></td><td>union of(xs:string, restriction of xs:token, restriction of xs:token)</td><td>optional</td><td></td></tr>
<tr><td><b>format_string</b></td><td></td><td>optional</td><td></td></tr>
<tr><td></td><td colspan="3">Used to format data into readable content on the ground system software.</td></tr>
<tr><td><b>high_orange</b></td><td>xs:decimal</td><td>optional</td><td></td></tr>
<tr><td><b>high_red</b></td><td>xs:decimal</td><td>optional</td><td></td></tr>
<tr><td><b>high_yellow</b></td><td>xs:decimal</td><td>optional</td><td></td></tr>
<tr><td><b>id</b></td><td>id_define</td><td>required</td><td></td></tr>
<tr><td></td><td colspan="3">ID for the telemetry channel.</td></tr>
<tr><td><b>low_orange</b></td><td>xs:decimal</td><td>optional</td><td></td></tr>
</table>
</td></tr>
</table>

QName	Type	Use	
low_red	xs:decimal	optional	
low_yellow	xs:decimal	optional	
name		required	
	`Name of the telemetry channel.`		
size	xs:nonNegativeInteger	optional	
	`The size of the argument.`		
type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	
update	channel_update_define	optional	
	`Defines when the channel updates.`		

Source

```
<xs:element name="channel">
  <xs:annotation>
    <xs:documentation>Defenition for a telemetry channel.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:group ref="type_size_choice_define"/>
      <xs:element ref="comment"/>
    </xs:choice>
    <xs:attribute name="id" use="required" type="id_define">
      <xs:annotation>
        <xs:documentation>ID for the telemetry channel.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Name of the telemetry channel.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="update" type="channel_update_define">
      <xs:annotation>
        <xs:documentation>Defines when the channel updates.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="abbrev">
      <xs:annotation>
        <xs:documentation>Required for AMPCS dictionary generation.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="format_string">
      <xs:annotation>
        <xs:documentation>Used to format data into readable content on the ground system software.</
xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="high_yellow" type="xs:decimal"/>
    <xs:attribute name="high_red" type="xs:decimal"/>
    <xs:attribute name="high_orange" type="xs:decimal"/>
    <xs:attribute name="low_yellow" type="xs:decimal"/>
    <xs:attribute name="low_red" type="xs:decimal"/>
    <xs:attribute name="low_orange" type="xs:decimal"/>
    <xs:attributeGroup ref="type_size_choice_define"/>
  </xs:complexType>
</xs:element>
```

Element enum

Namespace	No namespace
Diagram	
Properties	content: `complex`
Used by	Element Group type_size_choice_define

	Complex Type	data_type_and_default_define
	Element	parameter
Model	item+	
Children	item	

Instance

```
<enum name="">
  <item comment="" name="" value="">{1,unbounded}</item>
</enum>
```

Attributes	QName	Type	Use	
	name		required	
		Enum Name.		

Source

```
<xs:element name="enum">
  <xs:complexType>
    <xs:sequence>
      <xs:element maxOccurs="unbounded" ref="item"/>
    </xs:sequence>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Enum Name.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element `item`

Namespace	No namespace	
Diagram	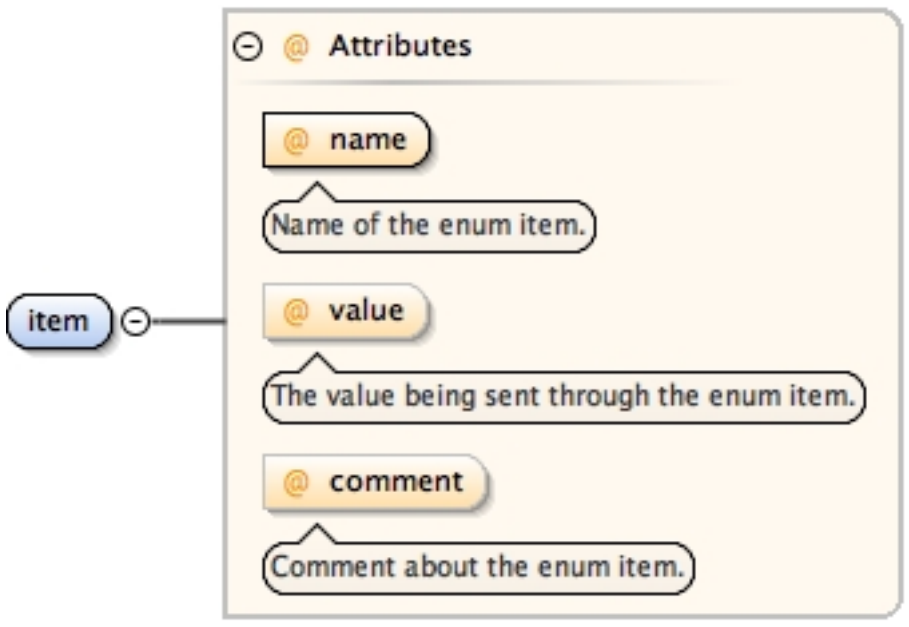 Attributes name Name of the enum item. value The value being sent through the enum item. comment Comment about the enum item. item	
Properties	content:	complex
Used by	Element	enum

Attributes	QName	Type	Use	
	comment		optional	
		Comment about the enum item.		
	name		required	
		Name of the enum item.		
	value		optional	
		The value being sent through the enum item.		

Source

```
<xs:element name="item">
  <xs:complexType>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Name of the enum item.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="value">
      <xs:annotation>
        <xs:documentation>The value being sent through the enum item.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="comment">
      <xs:annotation>
        <xs:documentation>Comment about the enum item.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
```

	</xs:element>

Element events

<table>
<tr><td>Namespace</td><td>No namespace</td></tr>
<tr><td>Annotations</td><td>Defines different events for a component.</td></tr>
<tr><td>Diagram</td><td>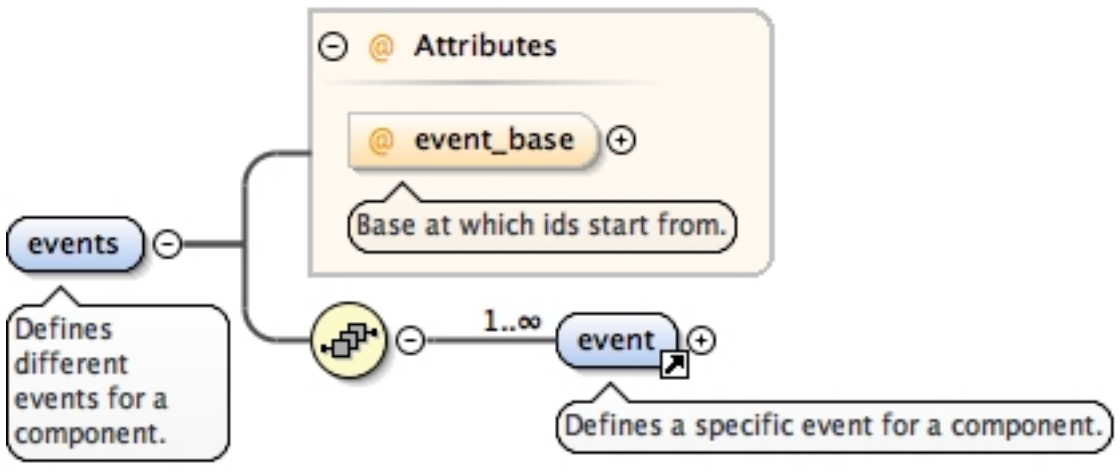
Attributes
event_base
Base at which ids start from.
events
Defines different events for a component.
1..∞
event
Defines a specific event for a component.

</td></tr>
<tr><td>Properties</td><td>content: complex</td></tr>
<tr><td>Used by</td><td>Complex Type component_define</td></tr>
<tr><td>Model</td><td>event+</td></tr>
<tr><td>Children</td><td>event</td></tr>
<tr><td>Instance</td><td><events event_base="">
  <event format_string="" id="" name="" severity="" throttle="">{1,unbounded}</event>
</events></td></tr>
<tr><td>Attributes</td><td><table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td><b>event_base</b></td><td>base_code_define</td><td>optional</td><td></td></tr><tr><td></td><td>Base at which ids start from.</td><td></td><td></td></tr></table></td></tr>
<tr><td>Source</td><td><xs:element name="events">
  <xs:annotation>
    <xs:documentation>Defines different events for a component.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element maxOccurs="unbounded" ref="event"/>
    </xs:sequence>
    <xs:attribute name="event_base" type="base_code_define">
      <xs:annotation>
        <xs:documentation>Base at which ids start from.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element></td></tr>
</table>

Element event

Namespace	No namespace
Annotations	Defines a specific event for a component.

Diagram

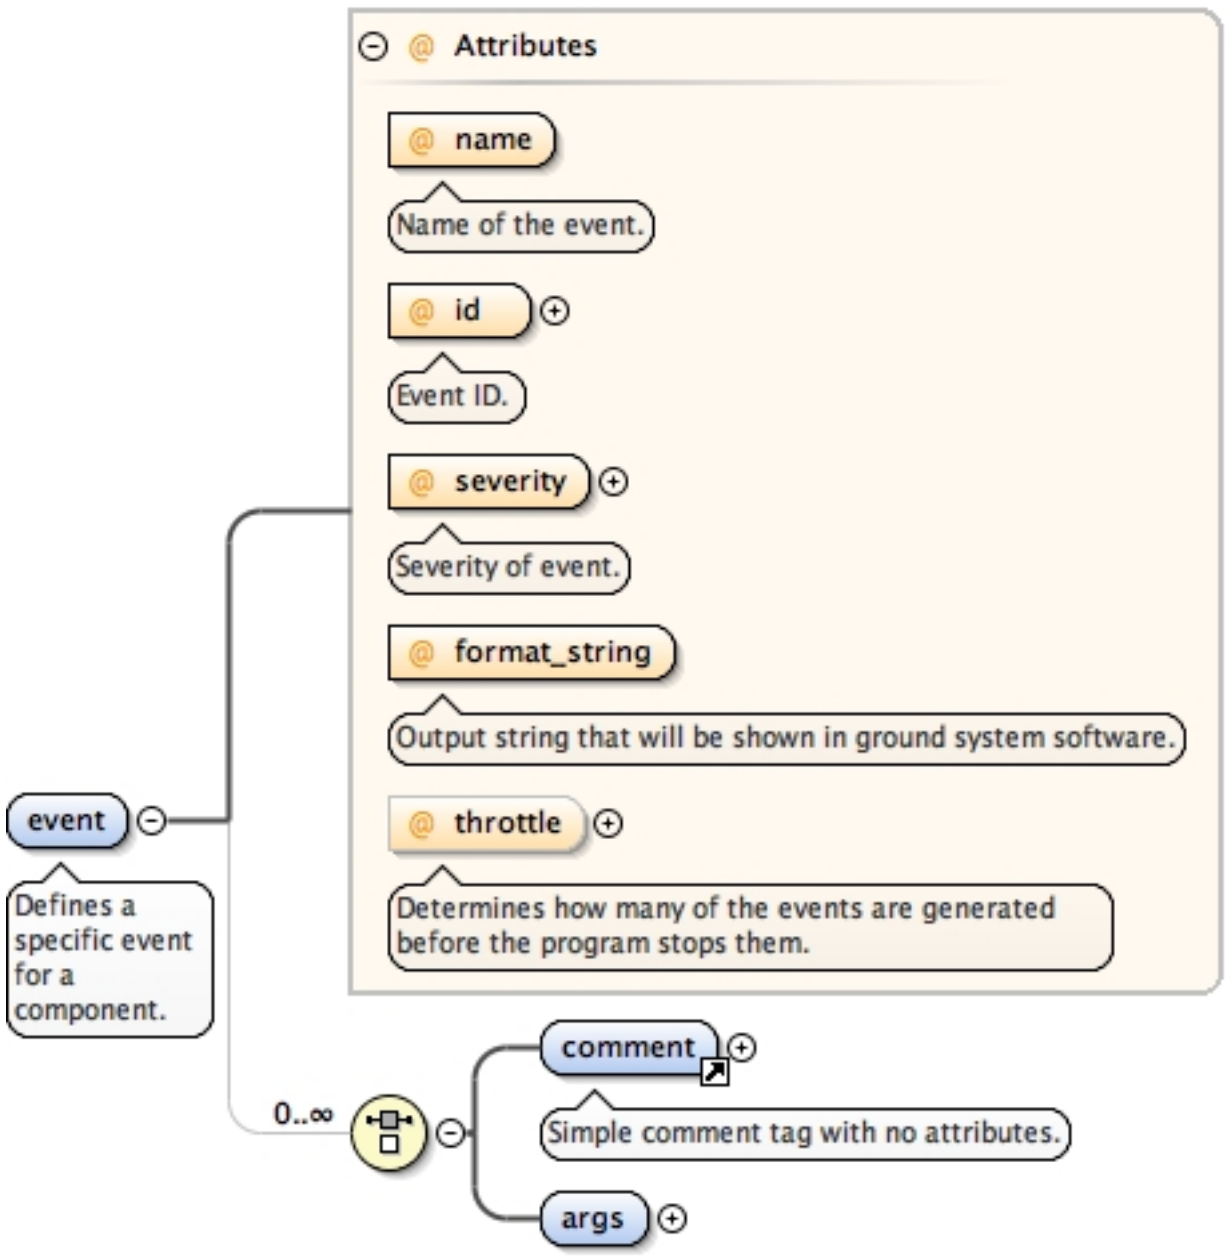
Attributes
name
Name of the event.
id
Event ID.
severity
Severity of event.
format_string
Output string that will be shown in ground system software.
throttle
Determines how many of the events are generated before the program stops them.
event
Defines a specific event for a component.
0..∞
comment
Simple comment tag with no attributes.
args

Properties

content:	`complex`

Used by

Element	events

Model

comment | args

Children

args, comment

Instance

```
<event format_string="" id="" name="" severity="" throttle="">
  <comment>{1,1}</comment>
  <args>{1,1}</args>
</event>
```

Attributes

QName	Type	Use	
format_string		required	
	Output string that will be shown in ground system software.		
id	id_define	required	
	Event ID.		
name		required	
	Name of the event.		
severity	severity_define	required	
	Severity of event.		
throttle	xs:nonNegativeInteger	optional	
	Determines how many of the events are generated before the program stops them.		

Source

```
<xs:element name="event">
  <xs:annotation>
    <xs:documentation>Defines a specific event for a component.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:element ref="comment"/>
      <xs:element name="args">
        <xs:complexType>
          <xs:group minOccurs="0" maxOccurs="unbounded" ref="external_arg_define"/>
        </xs:complexType>
      </xs:element>
    </xs:choice>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Name of the event.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="id" use="required" type="id_define">
      <xs:annotation>
        <xs:documentation>Event ID.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="severity" use="required" type="severity_define">
      <xs:annotation>
        <xs:documentation>Severity of event.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="format_string" use="required">
      <xs:annotation>
        <xs:documentation>Output string that will be shown in ground system software.</
xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="throttle" type="xs:nonNegativeInteger">
      <xs:annotation>
        <xs:documentation>Determines how many of the events are generated before the program stops
 them.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element event / args

Namespace	No namespace
Diagram	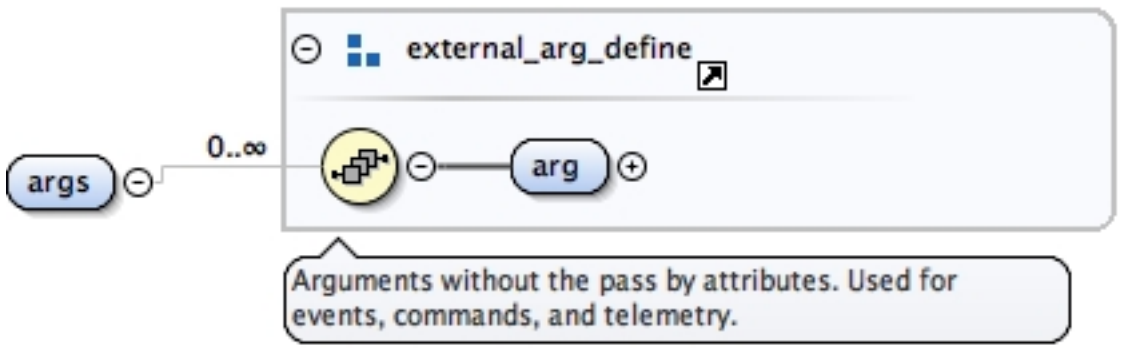 external_arg_define args 0..∞ arg Arguments without the pass by attributes. Used for events, commands, and telemetry.
Properties	content: `complex`
Model	arg
Children	arg

Instance	`<args>`
	`  <arg comment="" data_type="" name="" size="" type="">{1,1}</arg>`
	`</args>`

Source	`<xs:element name="args">`
	`  <xs:complexType>`
	`    <xs:group minOccurs="0" maxOccurs="unbounded" ref="external_arg_define"/>`
	`  </xs:complexType>`
	`</xs:element>`

Element external_arg_define / arg

Namespace	No namespace
Diagram	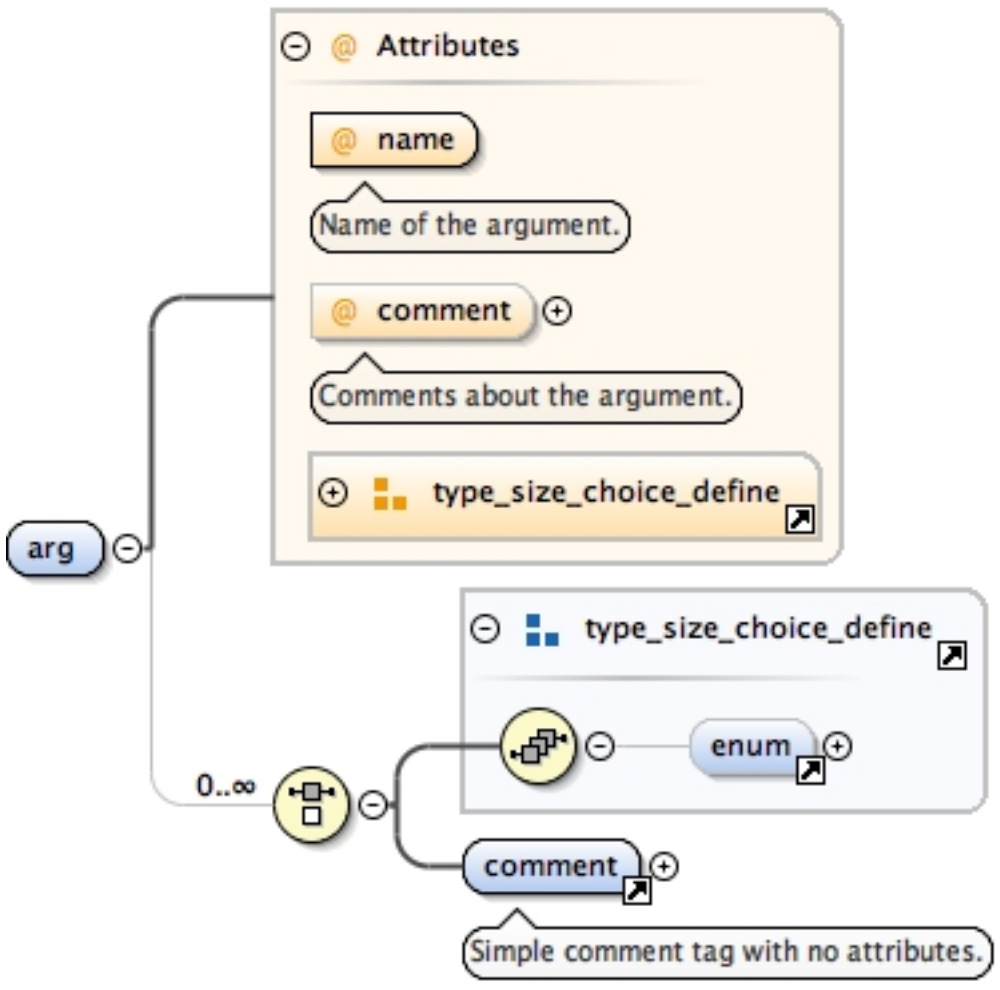 Attributes name Name of the argument. comment Comments about the argument. type_size_choice_define arg type_size_choice_define enum 0..∞ comment Simple comment tag with no attributes.
Properties	content: `complex`
Model	(enum{0,1}) | comment
Children	comment, enum
Instance	`<arg comment="" data_type="" name="" size="" type="">`

```
  <enum name="">{0,1}</enum>
  <comment>{1,1}</comment>
</arg>
```

Attributes

QName	Type	Use	
comment	xs:string	optional	
	Comments about the argument.		
data_type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	
name		required	
	Name of the argument.		
size	xs:nonNegativeInteger	optional	
	The size of the argument.		
type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	

Source

```
<xs:element name="arg">
  <xs:complexType>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:group ref="type_size_choice_define"/>
      <xs:element ref="comment"/>
    </xs:choice>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Name of the argument.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="comment" type="xs:string">
      <xs:annotation>
        <xs:documentation>Comments about the argument.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attributeGroup ref="type_size_choice_define"/>
  </xs:complexType>
</xs:element>
```

Element commands

Namespace	No namespace

Diagram

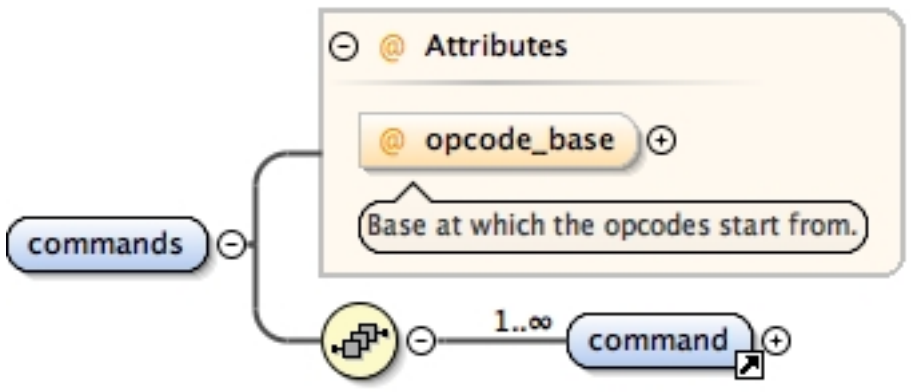

Properties	content:	complex
Used by	Complex Type	component_define
Model	command+	
Children	command	

Instance

```
<commands opcode_base="">
  <command full="" kind="" mnemonic="" opcode="" priority="">{1,unbounded}</command>
</commands>
```

Attributes

QName	Type	Use	
opcode_base	base_code_define	optional	
	Base at which the opcodes start from.		

Source

```
<xs:element name="commands">
  <xs:complexType>
    <xs:sequence>
      <xs:element maxOccurs="unbounded" ref="command"/>
    </xs:sequence>
    <xs:attribute name="opcode_base" type="base_code_define">
      <xs:annotation>
        <xs:documentation>Base at which the opcodes start from.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element command

Namespace	No namespace
Diagram	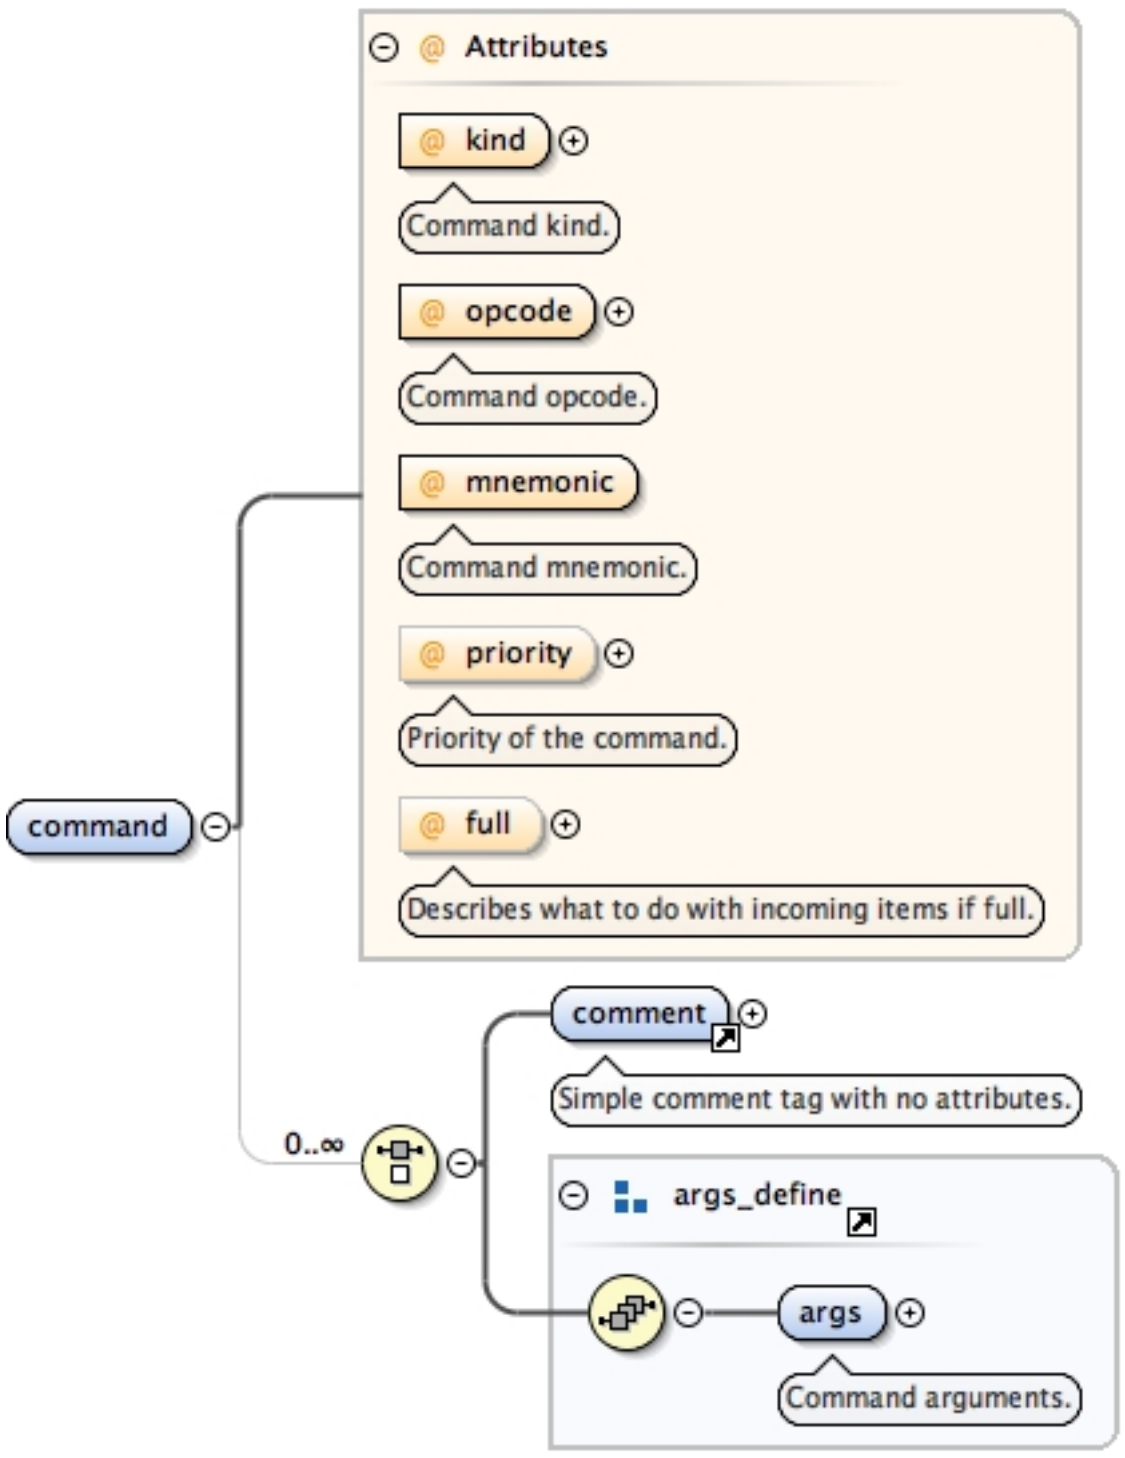

Properties	content:	complex
Used by	Element	commands
Model	comment | (args)	
Children	args, comment	

Instance

```
<command full="" kind="" mnemonic="" opcode="" priority="">
  <comment>{1,1}</comment>
  <args>{1,1}</args>
</command>
```

Attributes

QName	Type	Use	
full	full_items_define	optional	
	Describes what to do with incoming items if full.		
kind	command_kind_define	required	
	Command kind.		
mnemonic		required	
	Command mnemonic.		
opcode	id_define	required	
	Command opcode.		
priority	xs:integer	optional	
	Priority of the command.		

Source

```
<xs:element name="command">
  <xs:complexType>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:element ref="comment"/>
      <xs:group ref="args_define"/>
    </xs:choice>
    <xs:attribute name="kind" use="required" type="command_kind_define">
      <xs:annotation>
        <xs:documentation>Command kind.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="opcode" use="required" type="id_define">
      <xs:annotation>
        <xs:documentation>Command opcode.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="mnemonic" use="required">
      <xs:annotation>
        <xs:documentation>Command mnemonic.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="priority" type="xs:integer">
      <xs:annotation>
        <xs:documentation>Priority of the command.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="full" type="full_items_define">
      <xs:annotation>
        <xs:documentation>Describes what to do with incoming items if full.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element `args_define / args`

Namespace	No namespace
Annotations	Command arguments.
Diagram	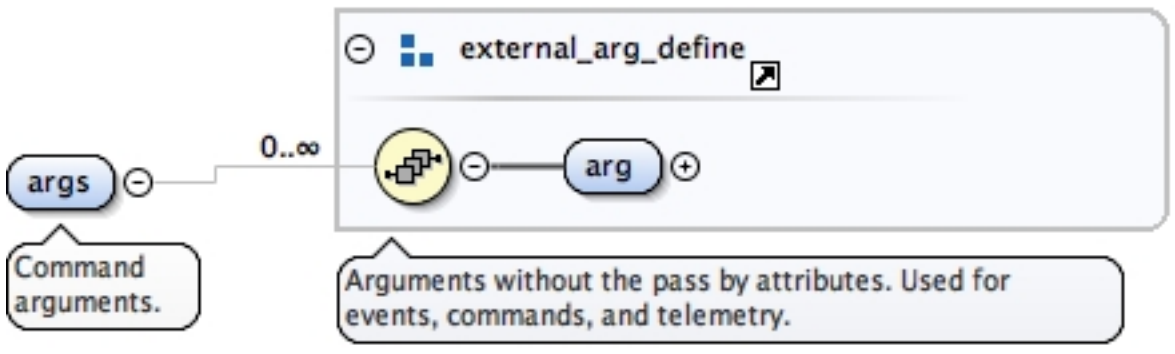 external_arg_define 0..∞ args arg Command arguments. Arguments without the pass by attributes. Used for events, commands, and telemetry.
Properties	content: complex
Model	arg
Children	arg

Instance	`<args>`
	`  <arg comment="" data_type="" name="" size="" type="">{1,1}</arg>`
	`</args>`

Source	`<xs:element name="args">`
	`  <xs:annotation>`
	`    <xs:documentation>Command arguments.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`    <xs:group minOccurs="0" maxOccurs="unbounded" ref="external_arg_define"/>`
	`  </xs:complexType>`
	`</xs:element>`

Element `internal_interfaces`

Namespace	No namespace
Annotations	Allows for multiple interfaces.
Diagram	 internal_interfaces 1..∞ internal_interface Allows for multiple interfaces.
Properties	content: complex
Used by	Complex Type component_define
Model	internal_interface+
Children	internal_interface

Instance	`<internal_interfaces>`
	`  <internal_interface name="" priority="">{1,unbounded}</internal_interface>`
	`</internal_interfaces>`

Source	`<xs:element name="internal_interfaces">`
	`  <xs:annotation>`
	`    <xs:documentation>Allows for multiple interfaces.</xs:documentation>`
	`  </xs:annotation>`

```
  <xs:complexType>
    <xs:sequence>
      <xs:element maxOccurs="unbounded" ref="internal_interface"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Element internal_interface

<table>
<tr><td>Namespace</td><td>No namespace</td></tr>
<tr><td>Diagram</td><td>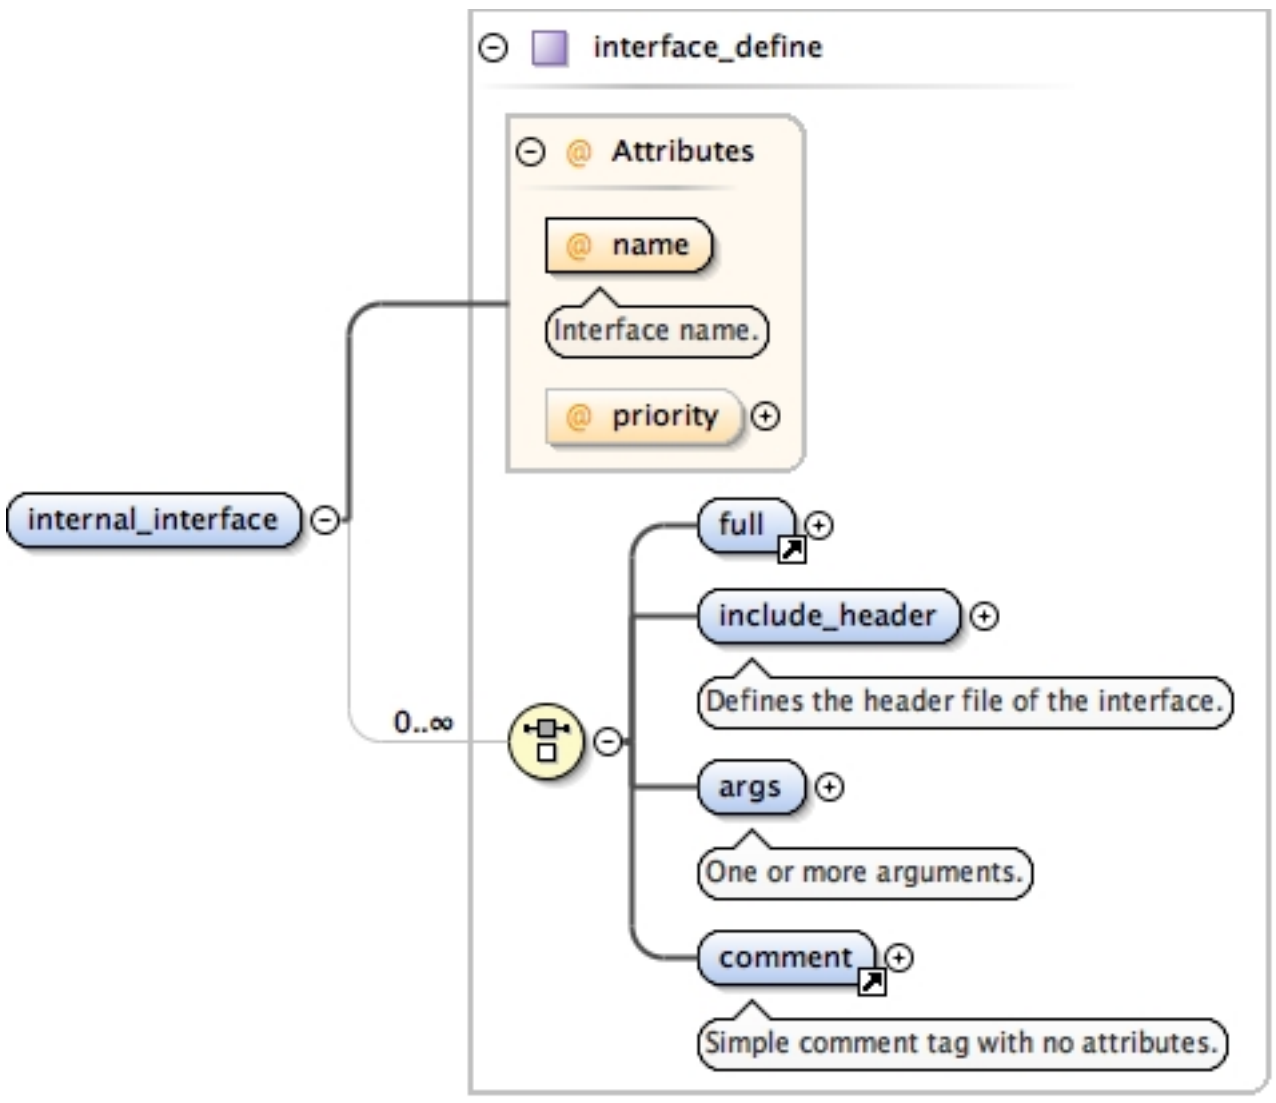
interface_define
Attributes
name
Interface name.
priority
internal_interface
0..∞
full
include_header
Defines the header file of the interface.
args
One or more arguments.
comment
Simple comment tag with no attributes.

</td></tr>
<tr><td>Type</td><td>interface_define</td></tr>
<tr><td>Properties</td><td>content: <code>complex</code></td></tr>
<tr><td>Used by</td><td>Element internal_interfaces</td></tr>
<tr><td>Model</td><td>full | include_header | args | comment</td></tr>
<tr><td>Children</td><td>args, comment, full, include_header</td></tr>
<tr><td>Instance</td><td><code>&lt;internal_interface name="" priority="">
  <full>{1,1}</full>
  <include_header>{1,1}</include_header>
  <args>{1,1}</args>
  <comment>{1,1}</comment>
</internal_interface&gt;</code></td></tr>
<tr><td>Attributes</td><td><table>
<tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr>
<tr><td><b>name</b></td><td></td><td>required</td><td></td></tr>
<tr><td></td><td colspan="3"><code>Interface name.</code></td></tr>
<tr><td><b>priority</b></td><td>xs:integer</td><td>optional</td><td></td></tr>
</table></td></tr>
<tr><td>Source</td><td><code>&lt;xs:element name="internal_interface" type="interface_define"/&gt;</code></td></tr>
</table>

Element full

Namespace	No namespace
Diagram	
Type	full_items_define
Properties	content: `simple`
Facets	enumeration `drop` enumeration `assert` enumeration `block`
Used by	Complex Type interface_define
Source	`<xs:element name="full" type="full_items_define"/>`

Element interface_define / include_header

Namespace	No namespace
Annotations	Defines the header file of the interface.
Diagram	 include_header xs:anyURI Defines the header file of the interface. Built-in primitive type. The anyURI datatype represents a Uniform Resource Identifier Reference (URI).
Type	xs:anyURI
Properties	content: simple

Source	`<xs:element name="include_header" type="xs:anyURI">`
	`  <xs:annotation>`
	`    <xs:documentation>Defines the header file of the interface.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:element>`

Element interface_define / args

Namespace	No namespace
Annotations	One or more arguments.
Diagram	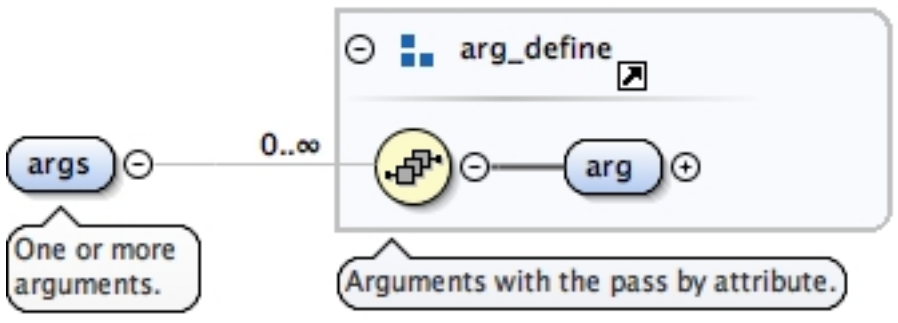 arg_define 0..∞ args arg One or more arguments. Arguments with the pass by attribute.
Properties	content: complex
Model	arg
Children	arg

Instance	`<args>`
	`  <arg comment="" data_type="" name="" pass_by="" size="" type="">{1,1}</arg>`
	`</args>`

Source	`<xs:element name="args">`
	`  <xs:annotation>`
	`    <xs:documentation>One or more arguments.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:complexType>`
	`    <xs:group minOccurs="0" maxOccurs="unbounded" ref="arg_define"/>`
	`  </xs:complexType>`
	`</xs:element>`

Element arg_define / arg

Namespace	No namespace
Diagram	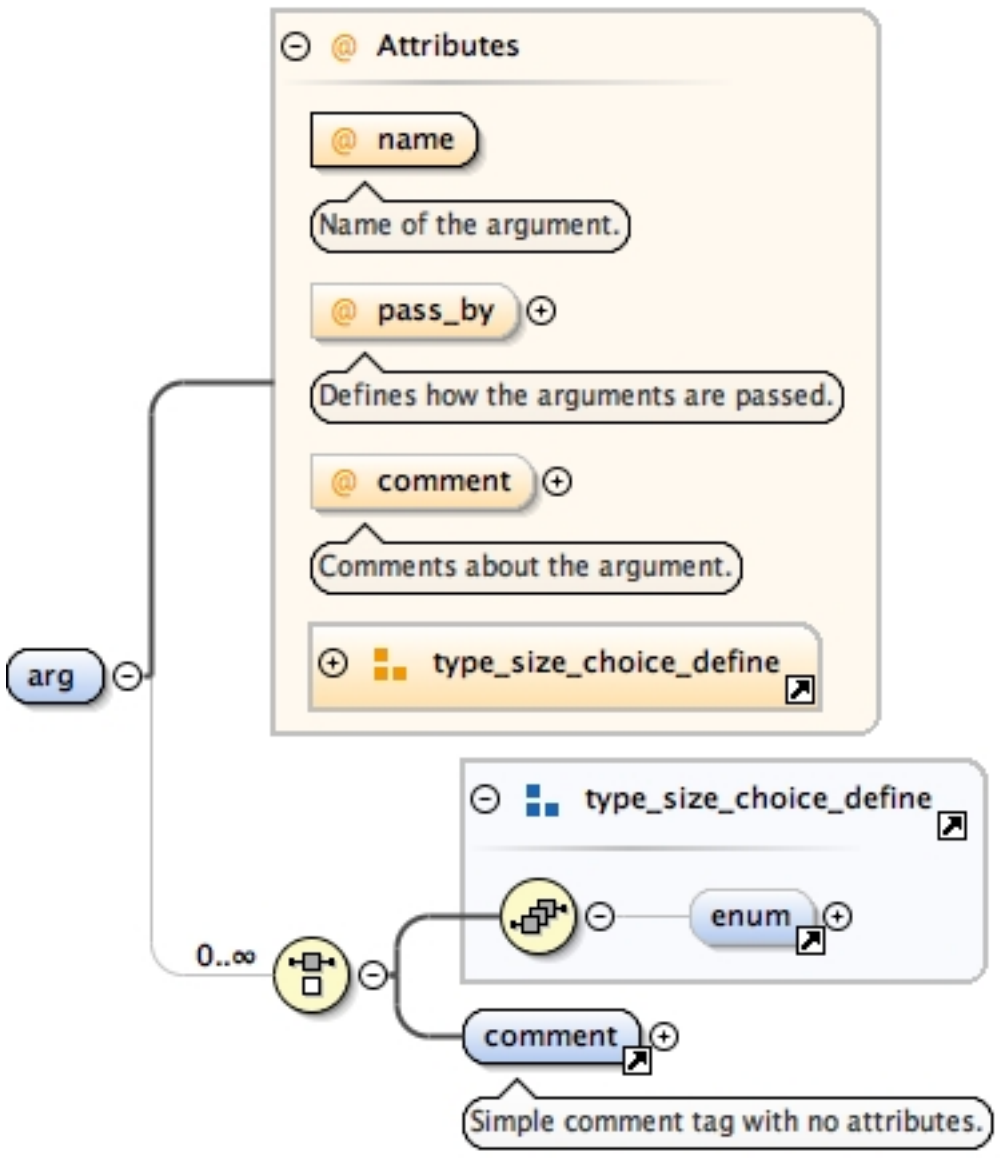 Attributes name Name of the argument. pass_by Defines how the arguments are passed. comment Comments about the argument. type_size_choice_define arg type_size_choice_define enum 0..∞ comment Simple comment tag with no attributes.

Properties	content: `complex`
Model	(enum{0,1}) | comment
Children	comment, enum

Instance

```
<arg comment="" data_type="" name="" pass_by="" size="" type="">
  <enum name="">{0,1}</enum>
  <comment>{1,1}</comment>
</arg>
```

Attributes

QName	Type	Use	
comment	xs:string	optional	
	Comments about the argument.		
data_type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	
name		required	
	Name of the argument.		
pass_by	pass_by_define	optional	
	Defines how the arguments are passed.		
size	xs:nonNegativeInteger	optional	
	The size of the argument.		
type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	

Source

```
<xs:element name="arg">
  <xs:complexType>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:group ref="type_size_choice_define"/>
      <xs:element ref="comment"/>
    </xs:choice>
    <xs:attribute name="name" use="required">
      <xs:annotation>
        <xs:documentation>Name of the argument.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="pass_by" type="pass_by_define">
      <xs:annotation>
        <xs:documentation>Defines how the arguments are passed.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="comment" type="xs:string">
      <xs:annotation>
        <xs:documentation>Comments about the argument.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attributeGroup ref="type_size_choice_define"/>
  </xs:complexType>
</xs:element>
```

Element `parameters`

Namespace	No namespace
Diagram	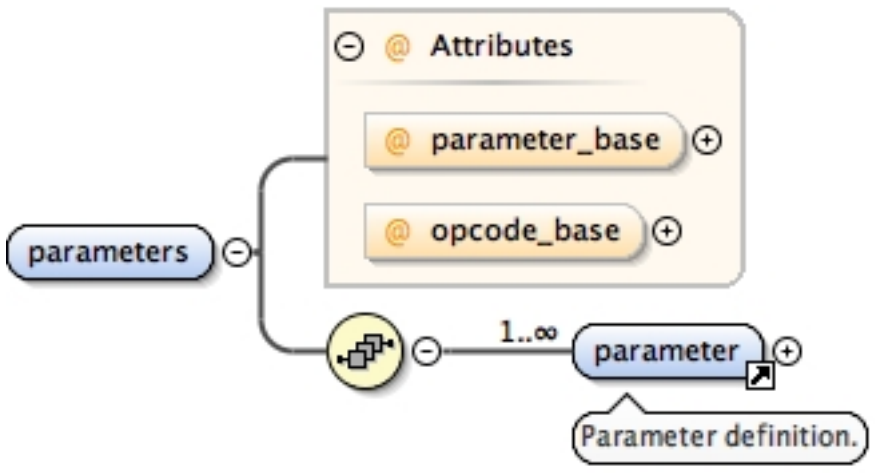

Properties	content:	`complex`
Used by	Complex Type	component_define
Model	parameter+	
Children	parameter	

Instance

```
<parameters opcode_base="" parameter_base="">
```

```
  <parameter data_type="" default="" id="" name="" save_opcode="" set_opcode="" size="">{1,unbounded}</
parameter>
</parameters>
```

Attributes

QName	Type	Use	
opcode_base	base_code_define	optional	
parameter_base	base_code_define	optional	

Source

```
<xs:element name="parameters">
  <xs:complexType>
    <xs:sequence>
      <xs:element maxOccurs="unbounded" ref="parameter"/>
    </xs:sequence>
    <xs:attribute name="parameter_base" type="base_code_define">
      <xs:annotation>
        <xs:documentation/>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="opcode_base" type="base_code_define">
      <xs:annotation>
        <xs:documentation/>
      </xs:annotation>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

Element `parameter`

Namespace	No namespace
Annotations	`Parameter definition.`
Diagram	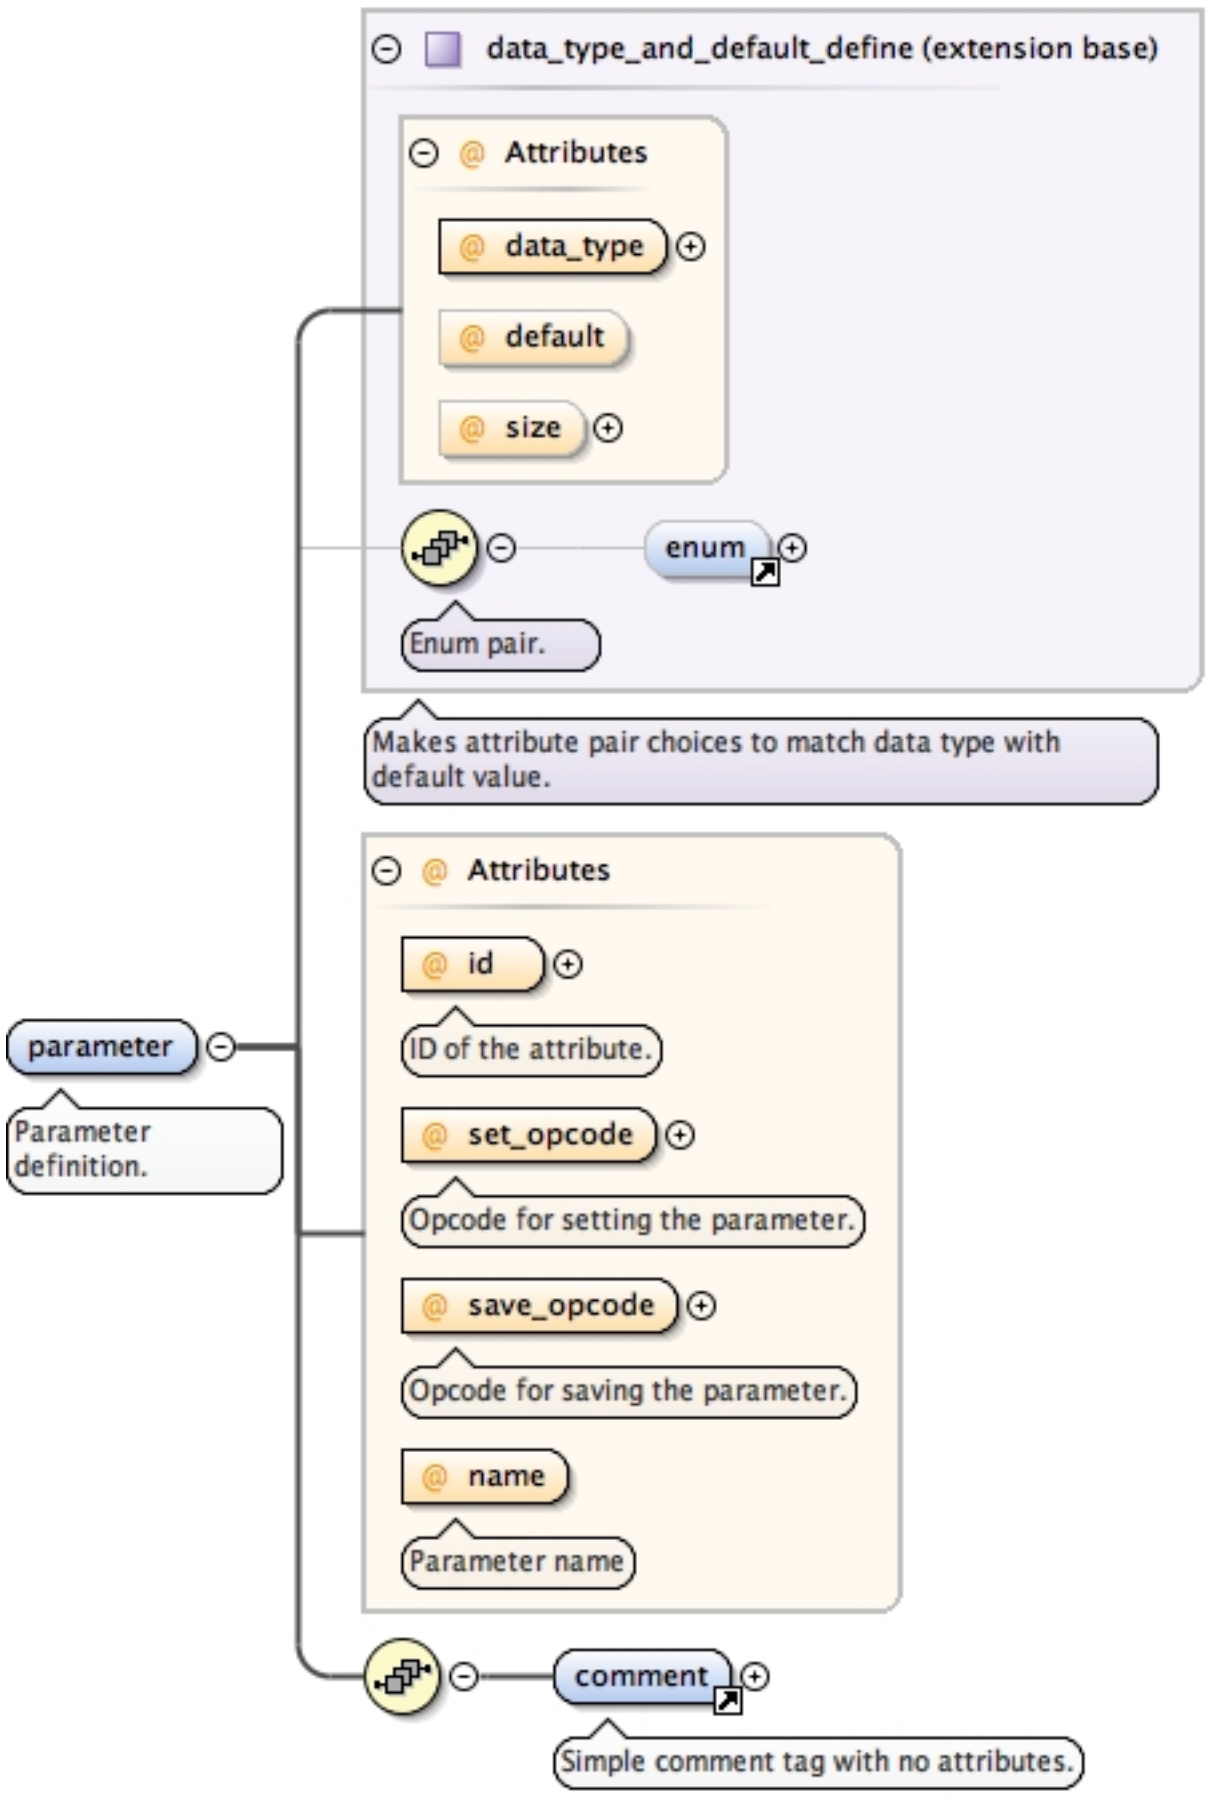
Type	extension of data_type_and_default_define
Type hierarchy	• data_type_and_default_define

data_type_and_default_define (extension base)
Attributes
data_type
default
size
enum
Enum pair.
Makes attribute pair choices to match data type with default value.
Attributes
id
ID of the attribute.
set_opcode
Opcode for setting the parameter.
save_opcode
Opcode for saving the parameter.
name
Parameter name
parameter
Parameter definition.
comment
Simple comment tag with no attributes.

Properties	content:	complex
Used by	Element	parameters
Model	enum{0,1} , comment	
Children	comment, enum	

Instance

```
<parameter data_type="" default="" id="" name="" save_opcode="" set_opcode="" size="">
  <enum name="">{0,1}</enum>
  <comment>{1,1}</comment>
</parameter>
```

Attributes

QName	Type	Use	
data_type	union of(not_user_cpp_type_define, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token)	required	
default		optional	
id	id_define	required	
	ID of the attribute.		
name		required	
	Parameter name		
save_opcode	id_define	required	
	Opcode for saving the parameter.		
set_opcode	id_define	required	
	Opcode for setting the parameter.		
size	positive_integer_define	optional	

Source

```
<xs:element name="parameter">
  <xs:annotation>
    <xs:documentation>Parameter definition.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:complexContent>
      <xs:extension base="data_type_and_default_define">
        <xs:sequence>
          <xs:element ref="comment"/>
        </xs:sequence>
        <xs:attribute name="id" use="required" type="id_define">
          <xs:annotation>
            <xs:documentation>ID of the attribute.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attribute name="set_opcode" use="required" type="id_define">
          <xs:annotation>
            <xs:documentation>Opcode for setting the parameter.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attribute name="save_opcode" use="required" type="id_define">
          <xs:annotation>
            <xs:documentation>Opcode for saving the parameter.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attribute name="name" use="required">
          <xs:annotation>
            <xs:documentation>Parameter name</xs:documentation>
          </xs:annotation>
        </xs:attribute>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
```

```
</xs:element>
```

Element `return`

Namespace	No namespace
Diagram	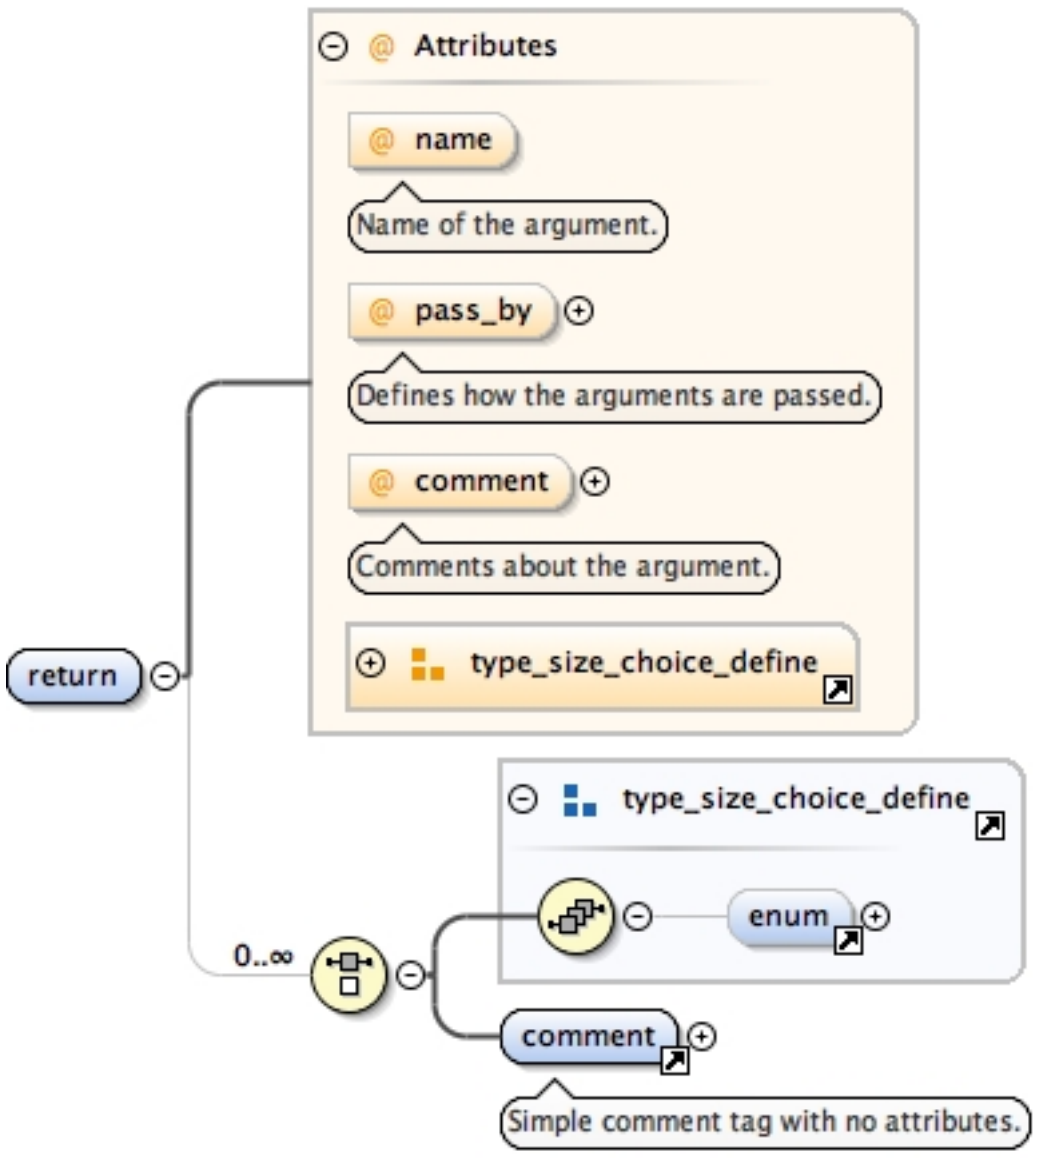 Attributes name Name of the argument. pass_by Defines how the arguments are passed. comment Comments about the argument. type_size_choice_define return type_size_choice_define enum 0..∞ comment Simple comment tag with no attributes.
Properties	content: complex
Model	(enum{0,1}) | comment
Children	comment, enum

Instance

```
<return comment="" data_type="" name="" pass_by="" size="" type="">
  <enum name="">{0,1}</enum>
  <comment>{1,1}</comment>
</return>
```

Attributes

QName	Type	Use	
comment	xs:string	optional	
	Comments about the argument.		
data_type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	
name		optional	
	Name of the argument.		
pass_by	pass_by_define	optional	
	Defines how the arguments are passed.		
size	xs:nonNegativeInteger	optional	
	The size of the argument.		
type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	

Source

```
<xs:element name="return">
  <xs:complexType>
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:group ref="type_size_choice_define"/>
      <xs:element ref="comment"/>
    </xs:choice>
    <xs:attribute name="name">
      <xs:annotation>
        <xs:documentation>Name of the argument.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="pass_by" type="pass_by_define">
      <xs:annotation>
        <xs:documentation>Defines how the arguments are passed.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attribute name="comment" type="xs:string">
```

```
      <xs:annotation>
        <xs:documentation>Comments about the argument.</xs:documentation>
      </xs:annotation>
    </xs:attribute>
    <xs:attributeGroup ref="type_size_choice_define"/>
  </xs:complexType>
</xs:element>
```

Complex Type(s)

Complex Type `component_define`

Namespace	No namespace
Diagram	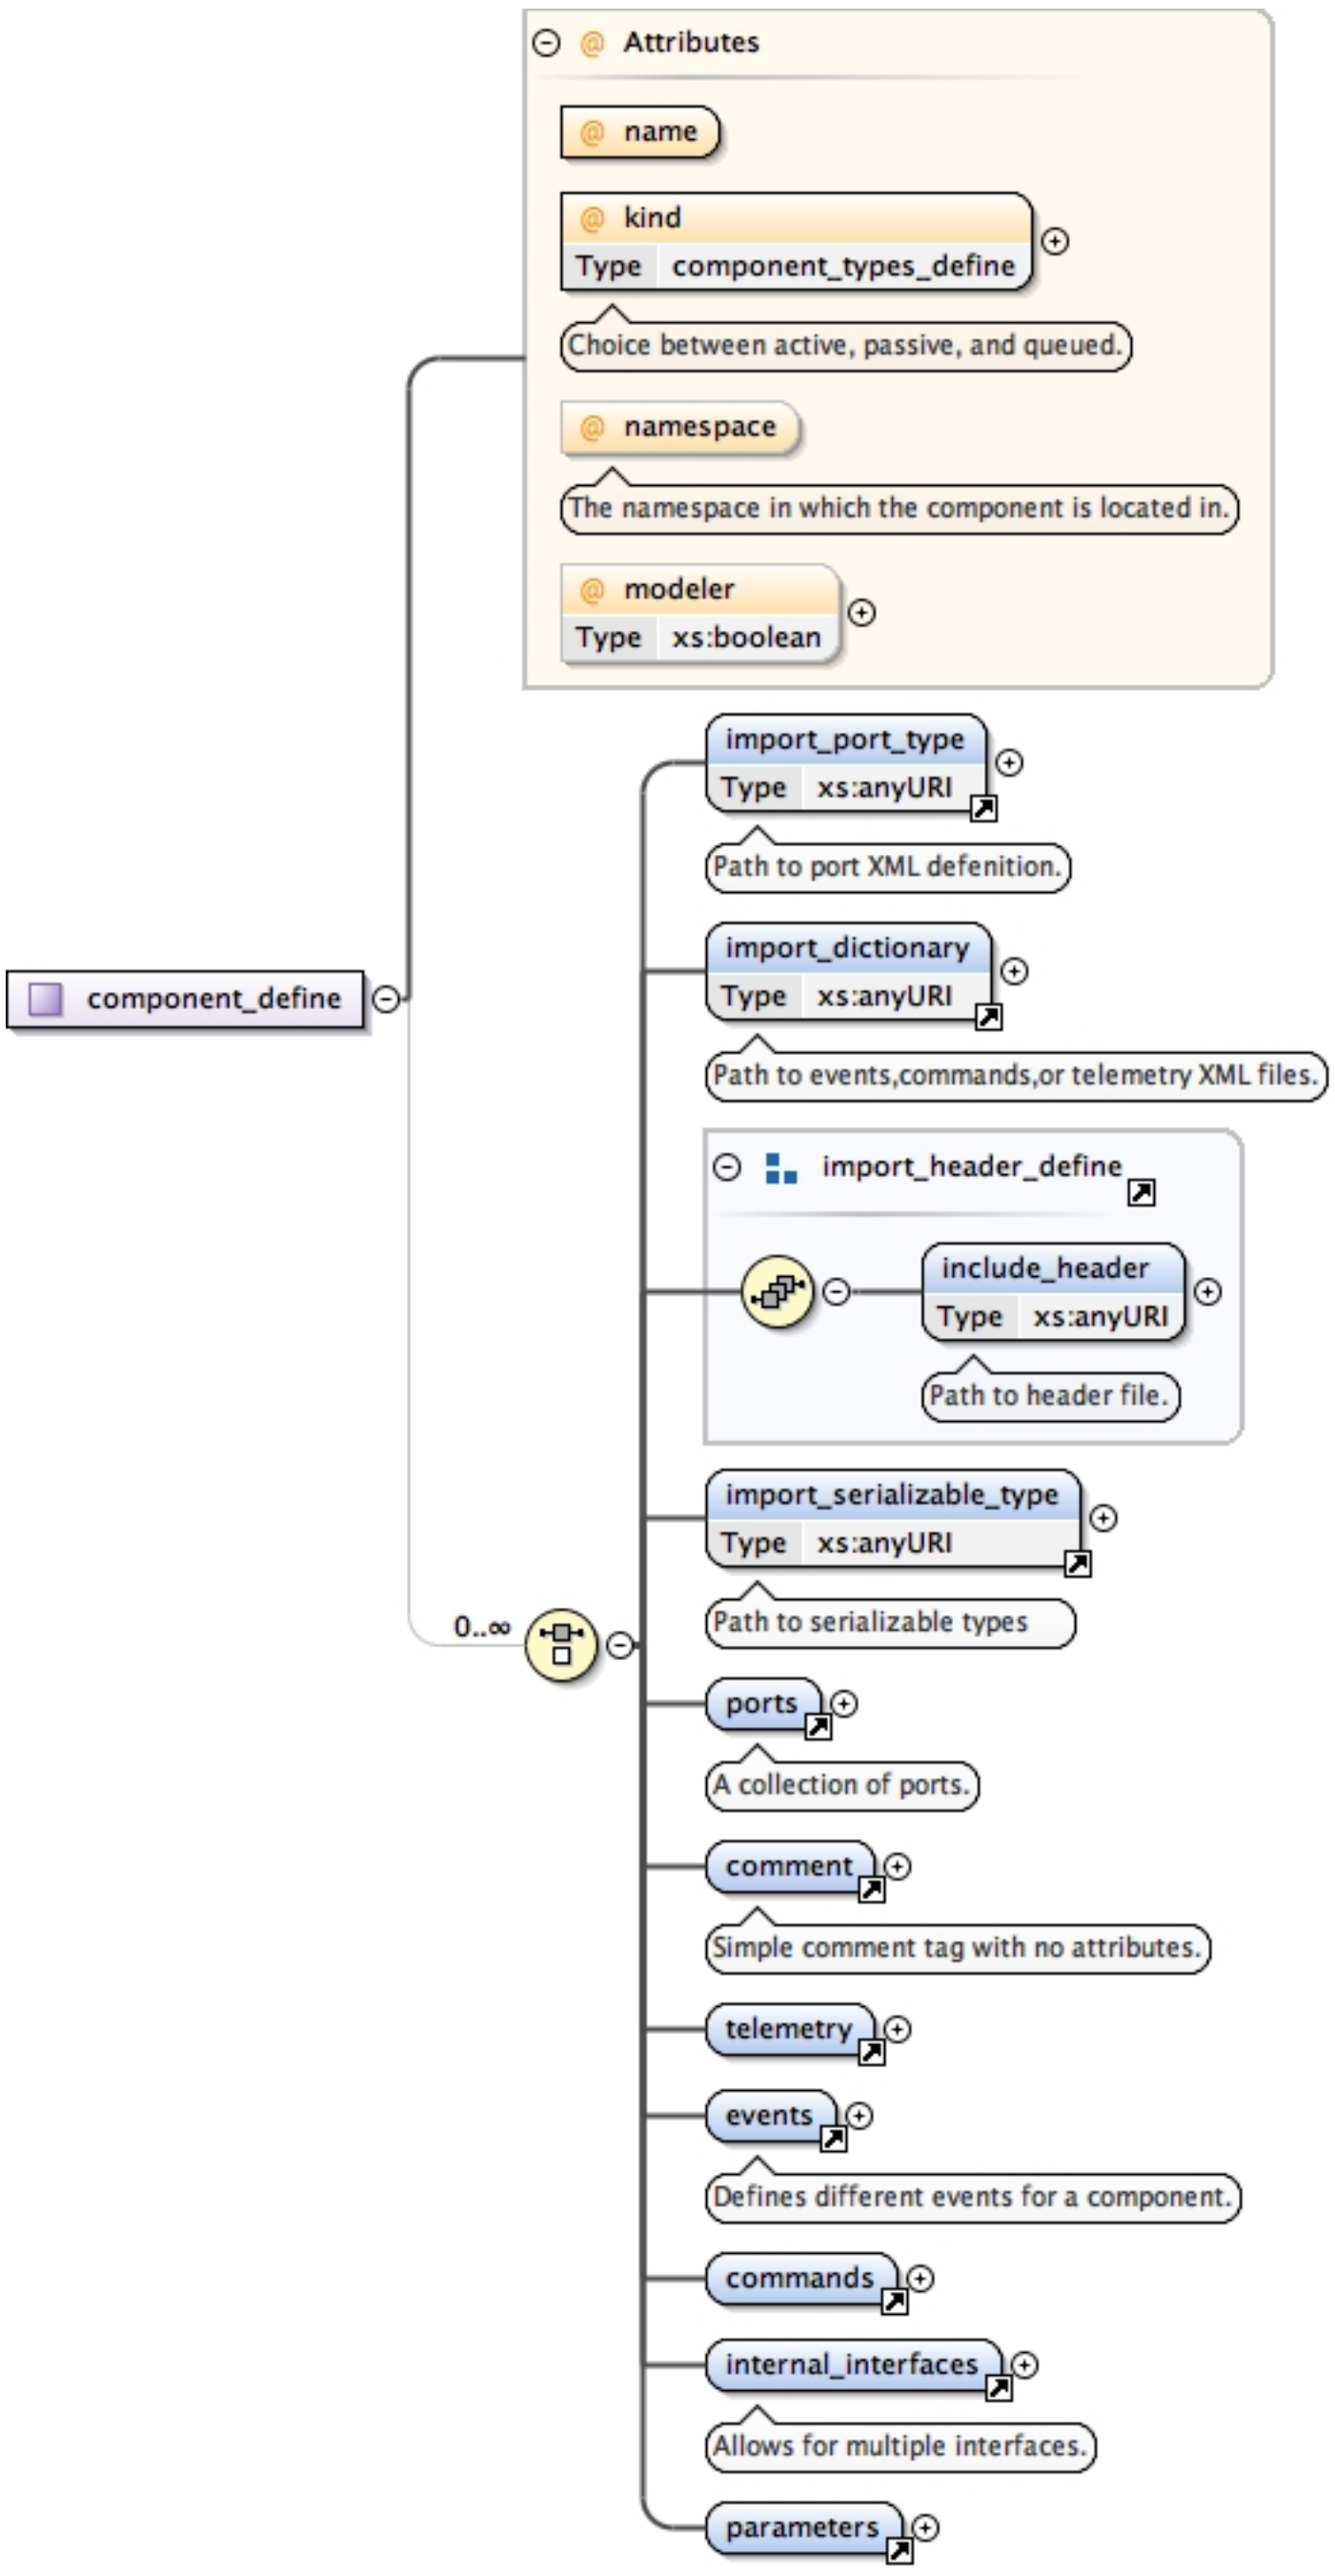 Attributes name kind Type component_types_define Choice between active, passive, and queued. namespace The namespace in which the component is located in. modeler Type xs:boolean component_define 0..∞ import_port_type Type xs:anyURI Path to port XML defenition. import_dictionary Type xs:anyURI Path to events,commands,or telemetry XML files. import_header_define include_header Type xs:anyURI Path to header file. import_serializable_type Type xs:anyURI Path to serializable types ports A collection of ports. comment Simple comment tag with no attributes. telemetry events Defines different events for a component. commands internal_interfaces Allows for multiple interfaces. parameters
Used by	Element component
Model	import_port_type | import_dictionary | (include_header) | import_serializable_type | ports | comment | telemetry | events | commands | internal_interfaces | parameters
Children	commands, comment, events, import_dictionary, import_port_type, import_serializable_type, include_header, internal_interfaces, parameters, ports, telemetry

Attributes	QName	Type	Use	
	kind	component_types_define	required	
		`Choice between active, passive, and queued.`		
	modeler	xs:boolean	optional	
	name		required	
	namespace		optional	
		`The namespace in which the component is located in.`		

Source

```
<xs:complexType name="component_define">
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:element ref="import_port_type"/>
    <xs:element ref="import_dictionary"/>
    <xs:group ref="import_header_define"/>
    <xs:element ref="import_serializable_type"/>
    <xs:element ref="ports"/>
    <xs:element ref="comment"/>
    <xs:element ref="telemetry"/>
    <xs:element ref="events"/>
    <xs:element ref="commands"/>
    <xs:element ref="internal_interfaces"/>
    <xs:element ref="parameters"/>
  </xs:choice>
  <xs:attribute name="name" use="required"/>
  <xs:attribute name="kind" use="required" type="component_types_define">
    <xs:annotation>
      <xs:documentation>Choice between active, passive, and queued.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
  <xs:attribute name="namespace">
    <xs:annotation>
      <xs:documentation>The namespace in which the component is located in.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
  <xs:attribute name="modeler" type="xs:boolean"/>
</xs:complexType>
```

Complex Type `interface_define`

Namespace	No namespace
Diagram	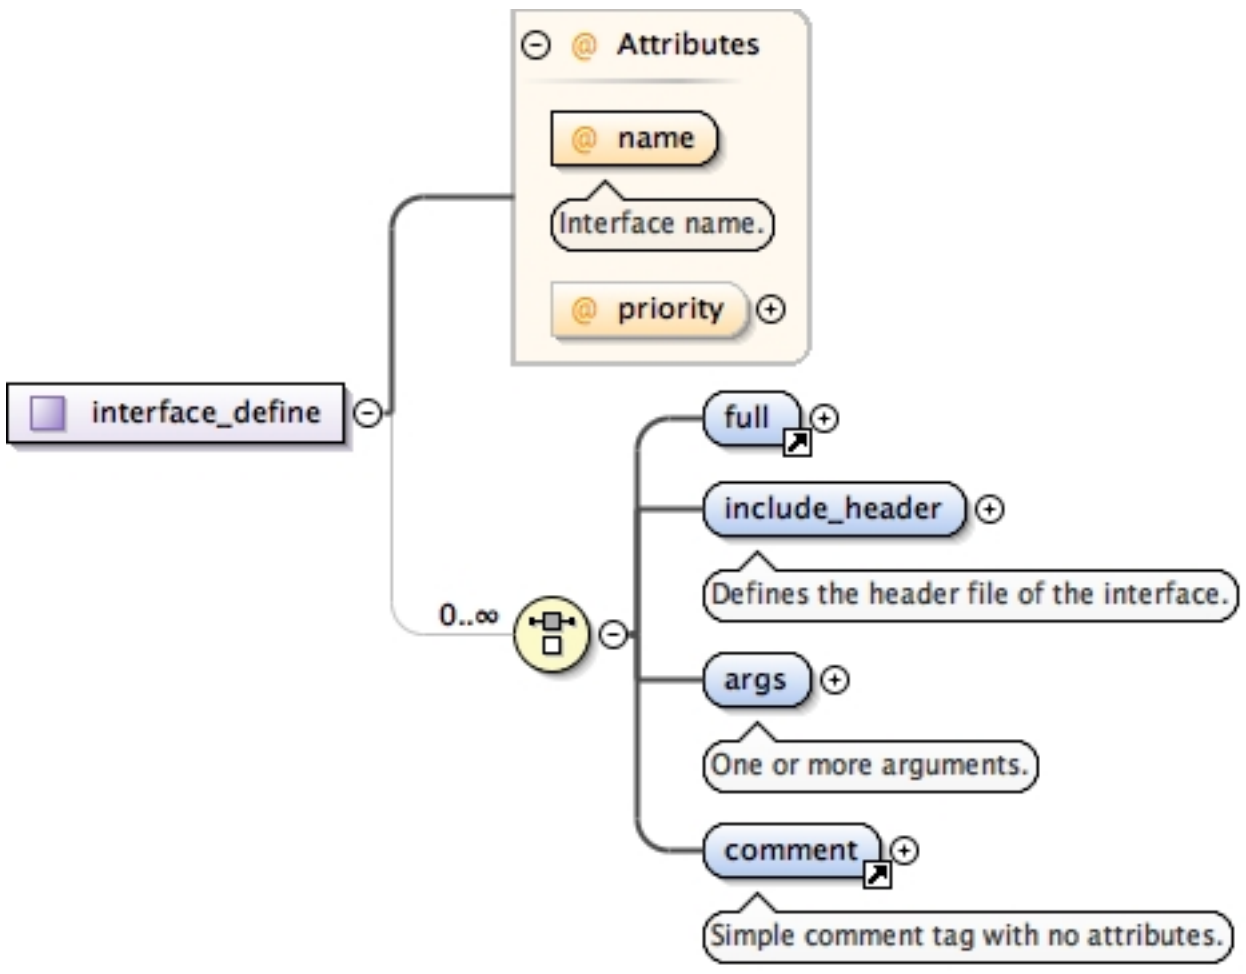

Used by	Element internal_interface
Model	full | include_header | args | comment
Children	args, comment, full, include_header

Attributes	QName	Type	Use	
	name		required	
		`Interface name.`		
	priority	xs:integer	optional	

Source

```
<xs:complexType name="interface_define">
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:element ref="full"/>
    <xs:element name="include_header" type="xs:anyURI">
      <xs:annotation>
        <xs:documentation>Defines the header file of the interface.</xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="args">
      <xs:annotation>
        <xs:documentation>One or more arguments.</xs:documentation>
      </xs:annotation>
      <xs:complexType>
        <xs:group minOccurs="0" maxOccurs="unbounded" ref="arg_define"/>
      </xs:complexType>
    </xs:element>
    <xs:element ref="comment"/>
  </xs:choice>
  <xs:attribute name="name" use="required">
    <xs:annotation>
      <xs:documentation>Interface name.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
  <xs:attribute name="priority" type="xs:integer"/>
</xs:complexType>
```

Complex Type `data_type_and_default_define`

Namespace	No namespace
Annotations	Makes attribute pair choices to match data type with default value.
Diagram	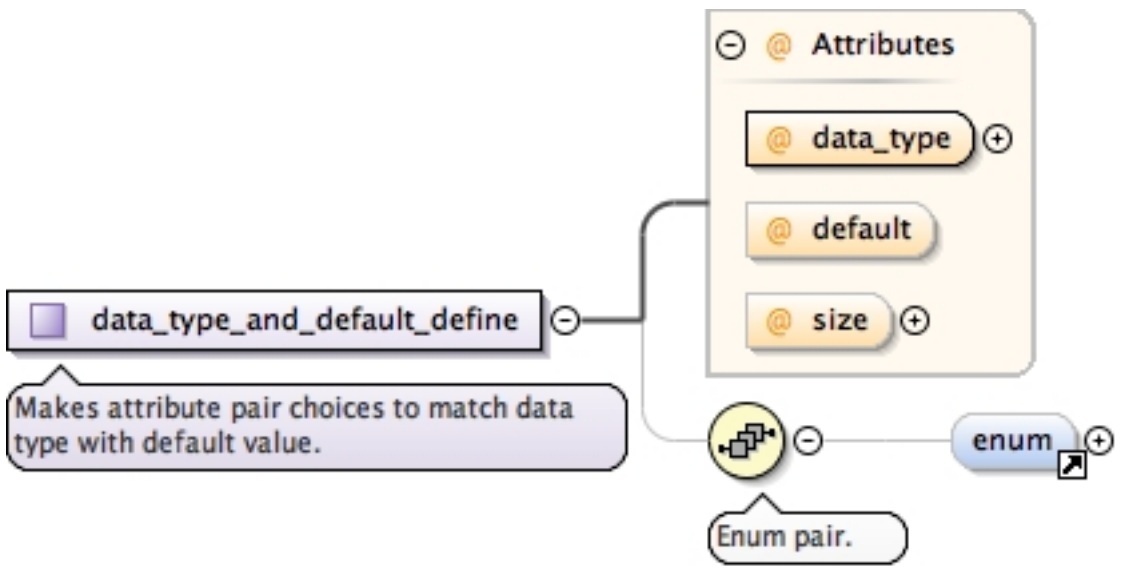 Attributes data_type default size data_type_and_default_define Makes attribute pair choices to match data type with default value. enum Enum pair.
Used by	Element parameter
Model	enum{0,1}
Children	enum

Attributes

QName	Type	Use	
data_type	union of(not_user_cpp_type_define, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token)	required	
default		optional	
size	positive_integer_define	optional	

Source

```
<xs:complexType name="data_type_and_default_define">
  <xs:annotation>
    <xs:documentation>Makes attribute pair choices to match data type with default value.</
xs:documentation>
  </xs:annotation>
  <xs:sequence minOccurs="0">
    <xs:annotation>
      <xs:documentation>Enum pair.</xs:documentation>
    </xs:annotation>
    <xs:element minOccurs="0" ref="enum"/>
  </xs:sequence>
  <xs:attribute name="data_type" use="required">
    <xs:simpleType>
      <xs:union memberTypes="not_user_cpp_type_define">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="ENUM"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="string"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="I8"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="U8"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="I16"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="U16"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="I32"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="U32"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="I64"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="U64"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="F32"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="F64"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="NATIVE_INT_TYPE"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="NATIVE_UINT_TYPE"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:union>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="default"/>
  <xs:attribute name="size" type="positive_integer_define"/>
</xs:complexType>
```

Simple Type(s)

Simple Type `port_types_define`

Namespace	No namespace
Annotations	`Choice between different port types.`
Diagram	port_types_define xs:token Choice between different port types. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration `input` enumeration `sync_input` enumeration `guarded_input` enumeration `async_input` enumeration `model_input` enumeration `output`
Used by	Attribute port/@kind
Source	see below

```
<xs:simpleType name="port_types_define">
  <xs:annotation>
    <xs:documentation>Choice between different port types.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="input"/>
    <xs:enumeration value="sync_input"/>
    <xs:enumeration value="guarded_input"/>
    <xs:enumeration value="async_input"/>
    <xs:enumeration value="model_input"/>
    <xs:enumeration value="output"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type `component_role_define`

Namespace	No namespace
Annotations	`Choice for component roles.`
Diagram	 component_role_define xs:token Choice for component roles. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration `LogEvent` enumeration `LogTextEvent` enumeration `TimeGet` enumeration `ParamSet` enumeration `ParamGet` enumeration `Telemetry` enumeration `CmdRegistration` enumeration `Cmd` enumeration `CmdResponse`
Used by	Attribute port/@role
Source	see below

```
<xs:simpleType name="component_role_define">
  <xs:annotation>
    <xs:documentation>Choice for component roles.</xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="LogEvent"/>
    <xs:enumeration value="LogTextEvent"/>
    <xs:enumeration value="TimeGet"/>
    <xs:enumeration value="ParamSet"/>
```

	`<xs:enumeration value="ParamGet"/>`
	    `<xs:enumeration value="Telemetry"/>`
	    `<xs:enumeration value="CmdRegistration"/>`
	    `<xs:enumeration value="Cmd"/>`
	    `<xs:enumeration value="CmdResponse"/>`
	  `</xs:restriction>`
	`</xs:simpleType>`

Simple Type `id_define`

Namespace	No namespace
Annotations	Defines a ID data type. Acceptable values formats include "10" , "0xA" , "xA".
Diagram	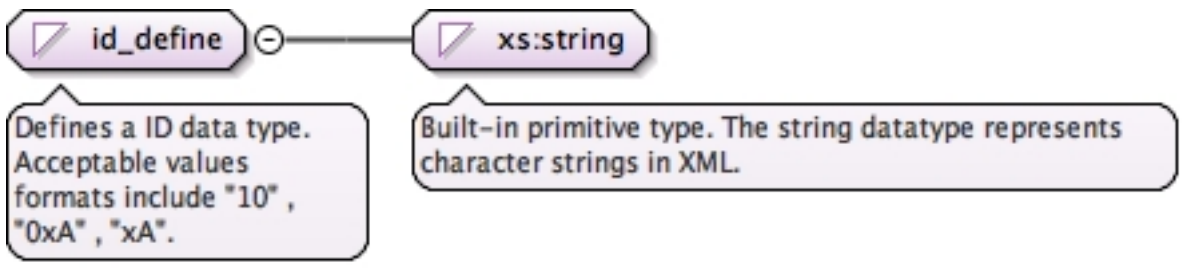 id_define xs:string Defines a ID data type. Acceptable values formats include "10" , "0xA" , "xA". Built-in primitive type. The string datatype represents character strings in XML.
Type	restriction of xs:string
Facets	pattern ((0?x\d+)|\d+)
Used by	Attributes channel/@id, command/@opcode, event/@id, parameter/@id, parameter/@save_opcode, parameter/@set_opcode

Source	`<xs:simpleType name="id_define">`
	  `<xs:annotation>`
	    `<xs:documentation>Defines a ID data type. Acceptable values formats include "10" , "0xA" , "xA".</xs:documentation>`
	  `</xs:annotation>`
	  `<xs:restriction base="xs:string">`
	    `<xs:pattern value="((0?x\d+)|\d+)"/>`
	  `</xs:restriction>`
	`</xs:simpleType>`

Simple Type `channel_update_define`

Namespace	No namespace
Annotations	Choice between always and on_change. This is used in the channel 'update' tag.
Diagram	 channel_update_define xs:token Choice between always and on_change. This is used in the channel 'update' tag. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration always enumeration on_change
Used by	Attribute channel/@update

Source	`<xs:simpleType name="channel_update_define">`
	  `<xs:annotation>`
	    `<xs:documentation>Choice between always and on_change. This is used in the channel 'update' tag.</xs:documentation>`
	  `</xs:annotation>`
	  `<xs:restriction base="xs:token">`
	    `<xs:enumeration value="always"/>`
	    `<xs:enumeration value="on_change"/>`
	  `</xs:restriction>`
	`</xs:simpleType>`

Simple Type `base_code_define`

Namespace	No namespace
Annotations	Made for base codes, ie 0x100,0x200
Diagram	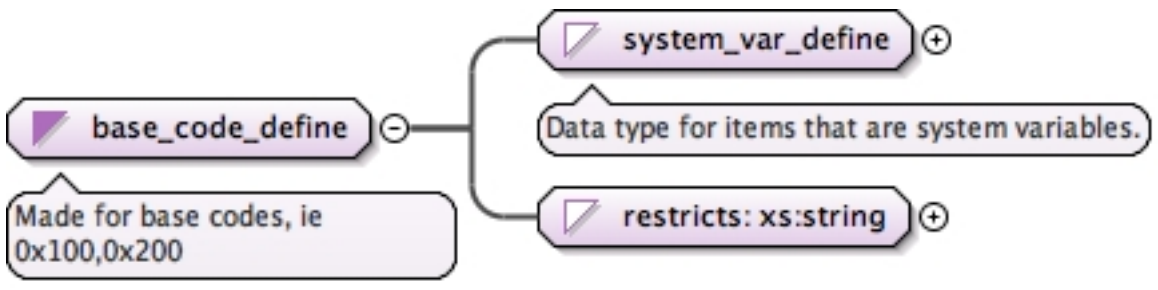 system_var_define Data type for items that are system variables. base_code_define Made for base codes, ie 0x100,0x200 restricts: xs:string
Type	union of(system_var_define, restriction of xs:string)

Used by	Attributes	commands/@opcode_base, events/@event_base, parameters/@opcode_base, parameters/@parameter_base, telemetry/@telemetry_base

Source

```
<xs:simpleType name="base_code_define">
  <xs:annotation>
    <xs:documentation>Made for base codes, ie 0x100,0x200</xs:documentation>
  </xs:annotation>
  <xs:union memberTypes="system_var_define">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:pattern value="(((0?x\d+)|\d+)(,?))+"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:union>
</xs:simpleType>
```

Simple Type severity_define

Namespace	No namespace
Annotations	Set of valid severity values. This is used for an event 'severity' tag.
Diagram	 severity_define xs:token Set of valid severity values. This is used for an event 'severity' tag. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration COMMAND enumeration ACTIVITY_LO enumeration ACTIVITY_HI enumeration WARNING_LO enumeration WARNING_HI enumeration DIAGNOSTIC enumeration FATAL
Used by	Attribute event/@severity

Source

```
<xs:simpleType name="severity_define">
  <xs:annotation>
    <xs:documentation>Set of valid severity values. This is used for an event 'severity' tag.</
xs:documentation>
  </xs:annotation>
  <xs:restriction base="xs:token">
    <xs:enumeration value="COMMAND"/>
    <xs:enumeration value="ACTIVITY_LO"/>
    <xs:enumeration value="ACTIVITY_HI"/>
    <xs:enumeration value="WARNING_LO"/>
    <xs:enumeration value="WARNING_HI"/>
    <xs:enumeration value="DIAGNOSTIC"/>
    <xs:enumeration value="FATAL"/>
  </xs:restriction>
</xs:simpleType>
```

Simple Type command_kind_define

Namespace	No namespace
Annotations	Choice between different command kinds.
Diagram	 command_kind_define xs:token Choice between different command kinds. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration async enumeration sync enumeration guarded
Used by	Attribute command/@kind

Source

```
<xs:simpleType name="command_kind_define">
```

	`  <xs:annotation>`
	`    <xs:documentation>Choice between different command kinds.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:token">`
	`    <xs:enumeration value="async"/>`
	`    <xs:enumeration value="sync"/>`
	`    <xs:enumeration value="guarded"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `full_items_define`

Namespace	No namespace
Annotations	Valid values for the full tag.
Diagram	full_items_define xs:token Valid values for the full tag. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration `drop` enumeration `assert` enumeration `block`
Used by	Attribute command/@full Element full

Source	`<xs:simpleType name="full_items_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Valid values for the full tag.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:token">`
	`    <xs:enumeration value="drop"/>`
	`    <xs:enumeration value="assert"/>`
	`    <xs:enumeration value="block"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `pass_by_define`

Namespace	No namespace
Annotations	Defines how the variable is being passed.
Diagram	 pass_by_define xs:token Defines how the variable is being passed. Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration `reference` enumeration `value` enumeration `pointer`
Used by	Attributes arg_define/arg/@pass_by, return/@pass_by

Source	`<xs:simpleType name="pass_by_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Defines how the variable is being passed.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:token">`
	`    <xs:enumeration value="reference"/>`
	`    <xs:enumeration value="value"/>`
	`    <xs:enumeration value="pointer"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `positive_integer_define`

Namespace	No namespace
Annotations	Positive, non-zero, whole numbers.

Diagram	 positive_integer_define Positive, non-zero, whole numbers. xs:integer Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...
Type	restriction of xs:integer
Facets	minInclusive 1
Used by	Attribute data_type_and_default_define/@size

Source	`<xs:simpleType name="positive_integer_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Positive, non-zero, whole numbers.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:integer">`
	`    <xs:minInclusive value="1"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `component_types_define`

Namespace	No namespace
Annotations	Choice between active, passive, or queued.
Diagram	 component_types_define Choice between active, passive, or queued. xs:token Built-in derived type. The token datatype represents tokenized strings. The base type of token is normalizedString.
Type	restriction of xs:token
Facets	enumeration active enumeration passive enumeration queued
Used by	Attribute component_define/@kind

Source	`<xs:simpleType name="component_types_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Choice between active, passive, or queued.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:token">`
	`    <xs:enumeration value="active"/>`
	`    <xs:enumeration value="passive"/>`
	`    <xs:enumeration value="queued"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `id_or_system_var_define`

Namespace	No namespace
Annotations	Data types for items that can either be numbers or references to system variables that have numbers.
Diagram	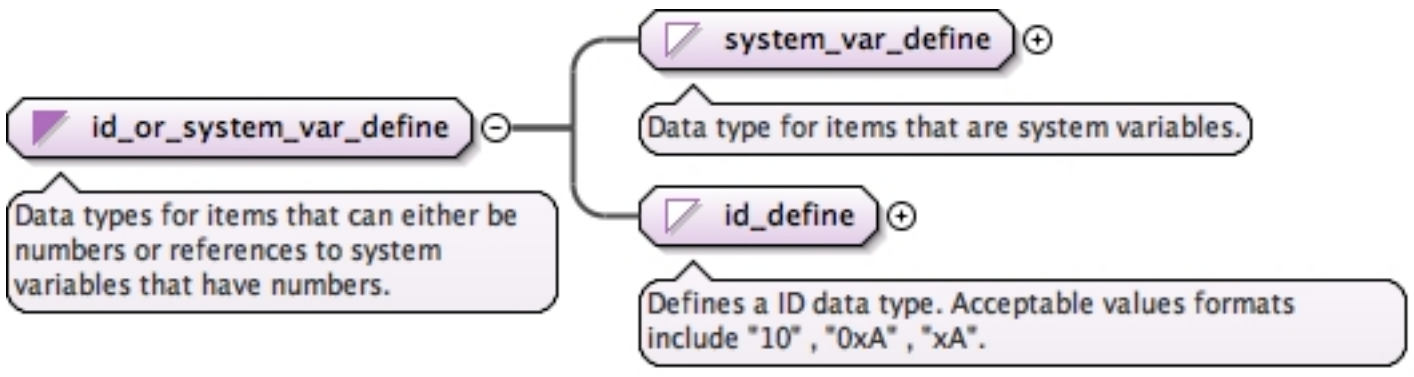 id_or_system_var_define Data types for items that can either be numbers or references to system variables that have numbers. system_var_define Data type for items that are system variables. id_define Defines a ID data type. Acceptable values formats include "10" , "0xA" , "xA".
Type	union of(system_var_define, id_define)

Source	`<xs:simpleType name="id_or_system_var_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Data types for items that can either be numbers or references to system variables that have numbers.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:union memberTypes="system_var_define id_define"/>`
	`</xs:simpleType>`

Simple Type `system_var_define`

Namespace	No namespace

Annotations	Data type for items that are system variables.
Diagram	 system_var_define xs:string Data type for items that are system variables. Built-in primitive type. The string datatype represents character strings in XML.
Type	restriction of xs:string
Facets	pattern $[\w|_|\-]+
Source	<xs:simpleType name="system_var_define"> <xs:annotation> <xs:documentation>Data type for items that are system variables.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:pattern value="$[\w|_|\-]+"/> </xs:restriction> </xs:simpleType>

Simple Type int8_t_define

Namespace	No namespace
Annotations	Signed 8 bit integer.
Diagram	 int8_t_define xs:int Signed 8 bit integer. Built-in derived type. The int datatype is derived from long by setting the value of maxInclusive to be 2147483647 and...
Type	restriction of xs:int
Facets	maxInclusive 127 minInclusive -128
Used by	Simple Type I8_define
Source	<xs:simpleType name="int8_t_define"> <xs:annotation> <xs:documentation>Signed 8 bit integer.</xs:documentation> </xs:annotation> <xs:restriction base="xs:int"> <xs:minInclusive value="-128"/> <xs:maxInclusive value="127"/> </xs:restriction> </xs:simpleType>

Simple Type uint8_t_define

Namespace	No namespace
Annotations	Unsigned 8 bit integer
Diagram	 uint8_t_define xs:unsignedByte Unsigned 8 bit integer Built-in derived type. The unsignedByte datatype is derived from unsignedShort by setting the value of maxInclusive to...
Type	restriction of xs:unsignedByte
Facets	maxInclusive 255 minInclusive 0
Used by	Simple Type U8_define
Source	<xs:simpleType name="uint8_t_define"> <xs:annotation> <xs:documentation>Unsigned 8 bit integer</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedByte"> <xs:minInclusive value="0"/> <xs:maxInclusive value="255"/> </xs:restriction> </xs:simpleType>

Simple Type int16_t_define

Namespace	No namespace

Annotations	Signed 16 bit integer.
Diagram	 int16_t_define xs:int Signed 16 bit integer. Built-in derived type. The int datatype is derived from long by setting the value of maxInclusive to be 2147483647 and...
Type	restriction of xs:int
Facets	maxInclusive 32767 minInclusive -32768
Used by	Simple Type I16_define

Source	`<xs:simpleType name="int16_t_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Signed 16 bit integer.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:int">`
	`    <xs:minInclusive value="-32768"/>`
	`    <xs:maxInclusive value="32767"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `uint16_t_define`

Namespace	No namespace
Annotations	Unsigned 16 bit integer
Diagram	 uint16_t_define xs:int Unsigned 16 bit integer Built-in derived type. The int datatype is derived from long by setting the value of maxInclusive to be 2147483647 and...
Type	restriction of xs:int
Facets	maxInclusive 65535 minInclusive 0
Used by	Simple Type U16_define

Source	`<xs:simpleType name="uint16_t_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Unsigned 16 bit integer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:int">`
	`    <xs:minInclusive value="0"/>`
	`    <xs:maxInclusive value="65535"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `int32_t_define`

Namespace	No namespace
Annotations	Signed 32 bit integer.
Diagram	 int32_t_define xs:integer Signed 32 bit integer. Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...
Type	restriction of xs:integer
Facets	maxInclusive 2147483647 minInclusive -2147483648
Used by	Simple Types I32_define, NATIVE_INT_TYPE_define

Source	`<xs:simpleType name="int32_t_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Signed 32 bit integer.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:integer">`
	`    <xs:minInclusive value="-2147483648"/>`
	`    <xs:maxInclusive value="2147483647"/>`

	</xs:restriction> </xs:simpleType>	

Simple Type uint32_t_define

Namespace	No namespace	
Annotations	Unsigned 32 bit integer	
Diagram	 uint32_t_define xs:integer Unsigned 32 bit integer Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...	
Type	restriction of xs:integer	
Facets	maxInclusive	4294967295
	minInclusive	0
Used by	Simple Types	NATIVE_UINT_TYPE_define, U32_define
Source	<xs:simpleType name="uint32_t_define"> <xs:annotation> <xs:documentation>Unsigned 32 bit integer</xs:documentation> </xs:annotation> <xs:restriction base="xs:integer"> <xs:minInclusive value="0"/> <xs:maxInclusive value="4294967295"/> </xs:restriction> </xs:simpleType>	

Simple Type int64_t_define

Namespace	No namespace	
Annotations	Signed 64 bit integer.	
Diagram	 int64_t_define xs:integer Signed 64 bit integer. Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...	
Type	restriction of xs:integer	
Facets	maxInclusive	9223372036854775807
	minInclusive	-9223372036854775808
Used by	Simple Type	I64_define
Source	<xs:simpleType name="int64_t_define"> <xs:annotation> <xs:documentation>Signed 64 bit integer.</xs:documentation> </xs:annotation> <xs:restriction base="xs:integer"> <xs:minInclusive value="-9223372036854775808"/> <xs:maxInclusive value="9223372036854775807"/> </xs:restriction> </xs:simpleType>	

Simple Type uint64_t_define

Namespace	No namespace	
Annotations	Unsigned 64 bit integer	
Diagram	 uint64_t_define xs:integer Unsigned 64 bit integer Built-in derived type. The integer datatype is derived from decimal by fixing the value of fractionDigits to be 0. This...	
Type	restriction of xs:integer	
Facets	maxInclusive	18446744073709551615
	minInclusive	0
Used by	Simple Type	U64_define

Source	`<xs:simpleType name="uint64_t_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Unsigned 64 bit integer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:integer">`
	`    <xs:minInclusive value="0"/>`
	`    <xs:maxInclusive value="18446744073709551615"/>`
	`  </xs:restriction>`
	`</xs:simpleType>`

Simple Type `not_user_cpp_type_define`

Namespace	No namespace
Annotations	Ensures data is not of the names of any other user defined C++ name.
Diagram	 not_user_cpp_type_define xs:string Ensures data is not of the names of any other user defined C++ name. Built-in primitive type. The string datatype represents character strings in XML.
Type	xs:string

Source	`<xs:simpleType name="not_user_cpp_type_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Ensures data is not of the names of any other user defined C++ name.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:string"/>`
	`</xs:simpleType>`

Simple Type `NATIVE_INT_TYPE_define`

Namespace	No namespace
Annotations	native integer type declaration
Diagram	 NATIVE_INT_TYPE_define int32_t_define native integer type declaration Signed 32 bit integer.
Type	int32_t_define
Type hierarchy	• xs:integer • int32_t_define • NATIVE_INT_TYPE_define
Facets	maxInclusive 2147483647 minInclusive -2147483648

Source	`<xs:simpleType name="NATIVE_INT_TYPE_define">`
	`  <xs:annotation>`
	`    <xs:documentation>native integer type declaration</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="int32_t_define"/>`
	`</xs:simpleType>`

Simple Type `NATIVE_UINT_TYPE_define`

Namespace	No namespace
Annotations	native unsigned integer type declaration
Diagram	 NATIVE_UINT_TYPE_define uint32_t_define native unsigned integer type declaration Unsigned 32 bit integer
Type	uint32_t_define
Type hierarchy	• xs:integer • uint32_t_define • NATIVE_UINT_TYPE_define
Facets	maxInclusive 4294967295 minInclusive 0

Source	`<xs:simpleType name="NATIVE_UINT_TYPE_define">`
	`  <xs:annotation>`
	`    <xs:documentation>native unsigned integer type declaration</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="uint32_t_define"/>`
	`</xs:simpleType>`

Simple Type `I8_define`

Namespace	No namespace
Annotations	8-bit signed integer
Diagram	 I8_define int8_t_define 8-bit signed integer Signed 8 bit integer.
Type	int8_t_define
Type hierarchy	• xs:int • int8_t_define • I8_define
Facets	maxInclusive 127 minInclusive -128

Source	`<xs:simpleType name="I8_define">`
	`  <xs:annotation>`
	`    <xs:documentation>8-bit signed integer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="int8_t_define"/>`
	`</xs:simpleType>`

Simple Type `U8_define`

Namespace	No namespace
Annotations	8-bit unsigned integer
Diagram	 U8_define uint8_t_define 8-bit unsigned integer Unsigned 8 bit integer
Type	uint8_t_define
Type hierarchy	• xs:unsignedByte • uint8_t_define • U8_define
Facets	maxInclusive 255 minInclusive 0
Used by	Simple Type BYTE_define

Source	`<xs:simpleType name="U8_define">`
	`  <xs:annotation>`
	`    <xs:documentation>8-bit unsigned integer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="uint8_t_define"/>`
	`</xs:simpleType>`

Simple Type `BYTE_define`

Namespace	No namespace
Annotations	byte type
Diagram	 BYTE_define U8_define byte type 8-bit unsigned integer
Type	U8_define
Type hierarchy	• xs:unsignedByte

	• uint8_t_define • U8_define • BYTE_define
Facets	maxInclusive 255 minInclusive 0

Source	`<xs:simpleType name="BYTE_define">`
	`  <xs:annotation>`
	`    <xs:documentation>byte type</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="U8_define"/>`
	`</xs:simpleType>`

Simple Type `I16_define`

Namespace	No namespace
Diagram	
Type	int16_t_define
Type hierarchy	• xs:int • int16_t_define • I16_define
Facets	maxInclusive 32767 minInclusive -32768

Source	`<xs:simpleType name="I16_define">`
	`  <xs:restriction base="int16_t_define"/>`
	`</xs:simpleType>`

Simple Type `U16_define`

Namespace	No namespace
Annotations	16-bit unsigned integer
Diagram	 U16_define uint16_t_define 16-bit unsigned integer Unsigned 16 bit integer
Type	uint16_t_define
Type hierarchy	• xs:int • uint16_t_define • U16_define
Facets	maxInclusive 65535 minInclusive 0

Source	`<xs:simpleType name="U16_define">`
	`  <xs:annotation>`
	`    <xs:documentation>16-bit unsigned integer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="uint16_t_define"/>`
	`</xs:simpleType>`

Simple Type `I32_define`

Namespace	No namespace
Annotations	32-bit signed integer
Diagram	 I32_define int32_t_define 32-bit signed integer Signed 32 bit integer.

Type	int32_t_define
Type hierarchy	• xs:integer • int32_t_define • I32_define
Facets	maxInclusive 2147483647 minInclusive -2147483648

Source	<xs:simpleType name="I32_define">
	  <xs:annotation>
	    <xs:documentation>32-bit signed integer</xs:documentation>
	  </xs:annotation>
	  <xs:restriction base="int32_t_define"/>
	</xs:simpleType>

Simple Type U32_define

Namespace	No namespace
Annotations	16-bit unsigned integer
Diagram	 U32_define uint32_t_define 16-bit unsigned integer Unsigned 32 bit integer
Type	uint32_t_define
Type hierarchy	• xs:integer • uint32_t_define • U32_define
Facets	maxInclusive 4294967295 minInclusive 0

Source	<xs:simpleType name="U32_define">
	  <xs:annotation>
	    <xs:documentation>16-bit unsigned integer</xs:documentation>
	  </xs:annotation>
	  <xs:restriction base="uint32_t_define"/>
	</xs:simpleType>

Simple Type I64_define

Namespace	No namespace
Annotations	64-bit unsigned integer
Diagram	 I64_define int64_t_define 64-bit unsigned integer Signed 64 bit integer.
Type	int64_t_define
Type hierarchy	• xs:integer • int64_t_define • I64_define
Facets	maxInclusive 9223372036854775807 minInclusive -9223372036854775808

Source	<xs:simpleType name="I64_define">
	  <xs:annotation>
	    <xs:documentation>64-bit unsigned integer</xs:documentation>
	  </xs:annotation>
	  <xs:restriction base="int64_t_define"/>
	</xs:simpleType>

Simple Type U64_define

Namespace	No namespace
Annotations	64-bit unsigned integer

Diagram	 U64_define uint64_t_define 64-bit unsigned integer Unsigned 64 bit integer
Type	uint64_t_define
Type hierarchy	• xs:integer • uint64_t_define • U64_define
Facets	maxInclusive 18446744073709551615 minInclusive 0

Source	`<xs:simpleType name="U64_define">`
	`  <xs:annotation>`
	`    <xs:documentation>64-bit unsigned integer</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="uint64_t_define"/>`
	`</xs:simpleType>`

Simple Type F32_define

Namespace	No namespace
Annotations	32 bit float
Diagram	 F32_define xs:float 32 bit float Built-in primitive type. Corresponds to the IEEE single-precision 32-bit floating point type [IEEE 754-1985].
Type	xs:float

Source	`<xs:simpleType name="F32_define">`
	`  <xs:annotation>`
	`    <xs:documentation>32 bit float</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:float"/>`
	`</xs:simpleType>`

Simple Type F64_define

Namespace	No namespace
Annotations	64 bit float
Diagram	 F64_define xs:double 64 bit float Built-in primitive type. The double datatype corresponds to IEEE double-precision 64-bit floating point type [IEEE...
Type	xs:double

Source	`<xs:simpleType name="F64_define">`
	`  <xs:annotation>`
	`    <xs:documentation>64 bit float</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:restriction base="xs:double"/>`
	`</xs:simpleType>`

Attribute(s)

Attribute port / @name

Namespace	No namespace
Annotations	Name of the port.
Properties	use: required
Used by	Element port

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`
	`    <xs:documentation>Name of the port.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute port / @data_type

Namespace	No namespace
Annotations	Type of data that is being accessed/sent from the port.
Properties	use: required
Used by	Element port
Source	<xs:attribute name="data_type" use="required"> <xs:annotation> <xs:documentation>Type of data that is being accessed/sent from the port.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute port / @kind

Namespace	No namespace
Annotations	Defines if port is an input or an output port.
Type	port_types_define
Properties	use: required
Facets	enumeration input enumeration sync_input enumeration guarded_input enumeration async_input enumeration model_input enumeration output
Used by	Element port
Source	<xs:attribute name="kind" use="required" type="port_types_define"> <xs:annotation> <xs:documentation>Defines if port is an input or an output port.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute port / @max_number

Namespace	No namespace
Annotations	Defines how many connections can be established to this port.
Used by	Element port
Source	<xs:attribute name="max_number"> <xs:annotation> <xs:documentation>Defines how many connections can be established to this port.</ xs:documentation> </xs:annotation> </xs:attribute>

Attribute port / @role

Namespace	No namespace
Annotations	Specifies what role this port plays or what this port is connected to.
Type	component_role_define
Properties	content: simple
Facets	enumeration LogEvent enumeration LogTextEvent enumeration TimeGet enumeration ParamSet enumeration ParamGet enumeration Telemetry enumeration CmdRegistration

	enumeration	Cmd
	enumeration	CmdResponse
Used by	Element	port
Source	<xs:attribute name="role" type="component_role_define"> <xs:annotation> <xs:documentation>Specifies what role this port plays or what this port is connected to.</ xs:documentation> </xs:annotation> </xs:attribute>	

Attribute port / @priority

Namespace	No namespace	
Annotations	Priority of port.	
Type	xs:integer	
Properties	content:	simple
Used by	Element	port

Source	<xs:attribute name="priority" type="xs:integer">
	  <xs:annotation>
	    <xs:documentation>Priority of port.</xs:documentation>
	  </xs:annotation>
	</xs:attribute>	

Attribute port / @full

Namespace	No namespace	
Annotations	Describes what to do with incoming items if full.	
Used by	Element	port
Source	<xs:attribute name="full"> <xs:annotation> <xs:documentation>Describes what to do with incoming items if full.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute item / @name

Namespace	No namespace	
Annotations	Name of the enum item.	
Properties	use:	required
Used by	Element	item
Source	<xs:attribute name="name" use="required"> <xs:annotation> <xs:documentation>Name of the enum item.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute item / @value

Namespace	No namespace	
Annotations	The value being sent through the enum item.	
Used by	Element	item
Source	<xs:attribute name="value"> <xs:annotation> <xs:documentation>The value being sent through the enum item.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute item / @comment

Namespace	No namespace

Annotations	Comment about the enum item.
Used by	Element item

Source	`<xs:attribute name="comment">`
	`  <xs:annotation>`
	`    <xs:documentation>Comment about the enum item.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute enum / @name

Namespace	No namespace
Annotations	Enum Name.
Properties	use: required
Used by	Element enum

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`
	`    <xs:documentation>Enum Name.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute channel / @id

Namespace	No namespace
Annotations	ID for the telemetry channel.
Type	id_define
Properties	use: required
Facets	pattern ((0?x\d+)|\d+)
Used by	Element channel

Source	`<xs:attribute name="id" use="required" type="id_define">`
	`  <xs:annotation>`
	`    <xs:documentation>ID for the telemetry channel.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute channel / @name

Namespace	No namespace
Annotations	Name of the telemetry channel.
Properties	use: required
Used by	Element channel

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`
	`    <xs:documentation>Name of the telemetry channel.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute channel / @update

Namespace	No namespace
Annotations	Defines when the channel updates.
Type	channel_update_define
Properties	content: simple
Facets	enumeration always enumeration on_change
Used by	Element channel

Source	`<xs:attribute name="update" type="channel_update_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Defines when the channel updates.</xs:documentation>`

	`  </xs:annotation>`
	`</xs:attribute>`

Attribute channel / @abbrev

Namespace	No namespace
Annotations	Required for AMPCS dictionary generation.
Used by	Element channel

Source	`<xs:attribute name="abbrev">`
	`  <xs:annotation>`
	`    <xs:documentation>Required for AMPCS dictionary generation.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute channel / @format_string

Namespace	No namespace
Annotations	Used to format data into readable content on the ground system software.
Used by	Element channel

Source	`<xs:attribute name="format_string">`
	`  <xs:annotation>`
	`    <xs:documentation>Used to format data into readable content on the ground system software.</`
	`xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute channel / @high_yellow

Namespace	No namespace
Type	xs:decimal
Properties	content: simple
Used by	Element channel
Source	`<xs:attribute name="high_yellow" type="xs:decimal"/>`

Attribute channel / @high_red

Namespace	No namespace
Type	xs:decimal
Properties	content: simple
Used by	Element channel
Source	`<xs:attribute name="high_red" type="xs:decimal"/>`

Attribute channel / @high_orange

Namespace	No namespace
Type	xs:decimal
Properties	content: simple
Used by	Element channel
Source	`<xs:attribute name="high_orange" type="xs:decimal"/>`

Attribute channel / @low_yellow

Namespace	No namespace
Type	xs:decimal
Properties	content: simple
Used by	Element channel

Source	<xs:attribute name="low_yellow" type="xs:decimal"/>

Attribute channel / @low_red

Namespace	No namespace
Type	xs:decimal
Properties	content: simple
Used by	Element channel
Source	<xs:attribute name="low_red" type="xs:decimal"/>

Attribute channel / @low_orange

Namespace	No namespace
Type	xs:decimal
Properties	content: simple
Used by	Element channel
Source	<xs:attribute name="low_orange" type="xs:decimal"/>

Attribute type_size_choice_define / @data_type

Namespace	No namespace
Type	union of(xs:string, restriction of xs:token, restriction of xs:token)
Properties	content: simple
Used by	Attribute Group type_size_choice_define

Source	<xs:attribute name="data_type">
	  <xs:simpleType>
	    <xs:union memberTypes="xs:string">
	      <xs:simpleType>
	        <xs:restriction base="xs:token">
	          <xs:enumeration value="string"/>
	        </xs:restriction>
	      </xs:simpleType>
	      <xs:simpleType>
	        <xs:restriction base="xs:token">
	          <xs:enumeration value="ENUM"/>
	        </xs:restriction>
	      </xs:simpleType>
	    </xs:union>
	  </xs:simpleType>
	</xs:attribute>

Attribute type_size_choice_define / @type

Namespace	No namespace
Type	union of(xs:string, restriction of xs:token, restriction of xs:token)
Properties	content: simple
Used by	Attribute Group type_size_choice_define

Source	<xs:attribute name="type">
	  <xs:simpleType>
	    <xs:union memberTypes="xs:string">
	      <xs:simpleType>
	        <xs:restriction base="xs:token">
	          <xs:enumeration value="string"/>
	        </xs:restriction>
	      </xs:simpleType>
	      <xs:simpleType>
	        <xs:restriction base="xs:token">
	          <xs:enumeration value="ENUM"/>
	        </xs:restriction>
	      </xs:simpleType>
	    </xs:union>
	  </xs:simpleType>
	</xs:attribute>

Attribute type_size_choice_define / @size

Namespace	No namespace
Annotations	The size of the argument.
Type	xs:nonNegativeInteger
Properties	content: simple
Used by	Attribute Group type_size_choice_define

Source	`<xs:attribute name="size" type="xs:nonNegativeInteger">`
	`  <xs:annotation>`
	`    <xs:documentation>The size of the argument.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute telemetry / @telemetry_base

Namespace	No namespace
Annotations	Base at which IDs start from.
Type	base_code_define
Properties	content: simple
Used by	Element telemetry

Source	`<xs:attribute name="telemetry_base" type="base_code_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Base at which IDs start from.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute external_arg_define / arg / @name

Namespace	No namespace
Annotations	Name of the argument.
Properties	use: required
Used by	Element external_arg_define/arg

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`
	`    <xs:documentation>Name of the argument.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute external_arg_define / arg / @comment

Namespace	No namespace
Annotations	Comments about the argument.
Type	xs:string
Properties	content: simple
Used by	Element external_arg_define/arg

Source	`<xs:attribute name="comment" type="xs:string">`
	`  <xs:annotation>`
	`    <xs:documentation>Comments about the argument.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute event / @name

Namespace	No namespace
Annotations	Name of the event.
Properties	use: required
Used by	Element event

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`

	<xs:documentation>Name of the event.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute event / @id

Namespace	No namespace
Annotations	Event ID.
Type	id_define
Properties	use: required
Facets	pattern ((0?x\d+)|\d+)
Used by	Element event
Source	<xs:attribute name="id" use="required" type="id_define"> <xs:annotation> <xs:documentation>Event ID.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute event / @severity

Namespace	No namespace
Annotations	Severity of event.
Type	severity_define
Properties	use: required
Facets	enumeration COMMAND enumeration ACTIVITY_LO enumeration ACTIVITY_HI enumeration WARNING_LO enumeration WARNING_HI enumeration DIAGNOSTIC enumeration FATAL
Used by	Element event
Source	<xs:attribute name="severity" use="required" type="severity_define"> <xs:annotation> <xs:documentation>Severity of event.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute event / @format_string

Namespace	No namespace
Annotations	Output string that will be shown in ground system software.
Properties	use: required
Used by	Element event
Source	<xs:attribute name="format_string" use="required"> <xs:annotation> <xs:documentation>Output string that will be shown in ground system software.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute event / @throttle

Namespace	No namespace
Annotations	Determines how many of the events are generated before the program stops them.
Type	xs:nonNegativeInteger
Properties	content: simple
Used by	Element event

Source	<xs:attribute name="throttle" type="xs:nonNegativeInteger"> <xs:annotation> <xs:documentation>Determines how many of the events are generated before the program stops them.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute events / @event_base

Namespace	No namespace
Annotations	Base at which ids start from.
Type	base_code_define
Properties	content: simple
Used by	Element events
Source	<xs:attribute name="event_base" type="base_code_define"> <xs:annotation> <xs:documentation>Base at which ids start from.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute command / @kind

Namespace	No namespace
Annotations	Command kind.
Type	command_kind_define
Properties	use: required
Facets	enumeration async enumeration sync enumeration guarded
Used by	Element command

Source	<xs:attribute name="kind" use="required" type="command_kind_define">
	  <xs:annotation>
	    <xs:documentation>Command kind.</xs:documentation>
	  </xs:annotation>
	</xs:attribute>

Attribute command / @opcode

Namespace	No namespace
Annotations	Command opcode.
Type	id_define
Properties	use: required
Facets	pattern ((0?x\d+)|\d+)
Used by	Element command

Source	<xs:attribute name="opcode" use="required" type="id_define">
	  <xs:annotation>
	    <xs:documentation>Command opcode.</xs:documentation>
	  </xs:annotation>
	</xs:attribute>

Attribute command / @mnemonic

Namespace	No namespace
Annotations	Command mnemonic.
Properties	use: required
Used by	Element command

Source	<xs:attribute name="mnemonic" use="required">
	  <xs:annotation>
	    <xs:documentation>Command mnemonic.</xs:documentation>

	</xs:annotation> </xs:attribute>	

Attribute command / @priority

Namespace	No namespace	
Annotations	Priority of the command.	
Type	xs:integer	
Properties	content:	simple
Used by	Element	command
Source	<xs:attribute name="priority" type="xs:integer"> <xs:annotation> <xs:documentation>Priority of the command.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute command / @full

Namespace	No namespace	
Annotations	Describes what to do with incoming items if full.	
Type	full_items_define	
Properties	content:	simple
Facets	enumeration	drop
	enumeration	assert
	enumeration	block
Used by	Element	command
Source	<xs:attribute name="full" type="full_items_define"> <xs:annotation> <xs:documentation>Describes what to do with incoming items if full.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute commands / @opcode_base

Namespace	No namespace	
Annotations	Base at which the opcodes start from.	
Type	base_code_define	
Properties	content:	simple
Used by	Element	commands
Source	<xs:attribute name="opcode_base" type="base_code_define"> <xs:annotation> <xs:documentation>Base at which the opcodes start from.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute arg_define / arg / @name

Namespace	No namespace	
Annotations	Name of the argument.	
Properties	use:	required
Used by	Element	arg_define/arg
Source	<xs:attribute name="name" use="required"> <xs:annotation> <xs:documentation>Name of the argument.</xs:documentation> </xs:annotation> </xs:attribute>	

Attribute arg_define / arg / @pass_by

Namespace	No namespace

Annotations	Defines how the arguments are passed.
Type	pass_by_define
Properties	content: simple
Facets	enumeration reference enumeration value enumeration pointer
Used by	Element arg_define/arg

Source	`<xs:attribute name="pass_by" type="pass_by_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Defines how the arguments are passed.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute arg_define / arg / @comment

Namespace	No namespace
Annotations	Comments about the argument.
Type	xs:string
Properties	content: simple
Used by	Element arg_define/arg

Source	`<xs:attribute name="comment" type="xs:string">`
	`  <xs:annotation>`
	`    <xs:documentation>Comments about the argument.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute interface_define / @name

Namespace	No namespace
Annotations	Interface name.
Properties	use: required
Used by	Complex Type interface_define

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`
	`    <xs:documentation>Interface name.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute interface_define / @priority

Namespace	No namespace
Type	xs:integer
Properties	content: simple
Used by	Complex Type interface_define
Source	`<xs:attribute name="priority" type="xs:integer"/>`

Attribute data_type_and_default_define / @data_type

Namespace	No namespace
Type	union of(not_user_cpp_type_define, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token, restriction of xs:token)
Properties	use: required
Used by	Complex Type data_type_and_default_define

Source	`<xs:attribute name="data_type" use="required">`
	`  <xs:simpleType>`

```
    <xs:union memberTypes="not_user_cpp_type_define">
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="ENUM"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="string"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="I8"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="U8"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="I16"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="U16"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="I32"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="U32"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="I64"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="U64"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="F32"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="F64"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="NATIVE_INT_TYPE"/>
        </xs:restriction>
      </xs:simpleType>
      <xs:simpleType>
        <xs:restriction base="xs:token">
          <xs:enumeration value="NATIVE_UINT_TYPE"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:union>
  </xs:simpleType>
</xs:attribute>
```

Attribute data_type_and_default_define / @default

Namespace	No namespace
Used by	Complex Type data_type_and_default_define
Source	`<xs:attribute name="default"/>`

Attribute `data_type_and_default_define / @size`

Namespace	No namespace
Type	positive_integer_define
Properties	content: simple
Facets	minInclusive 1
Used by	Complex Type data_type_and_default_define
Source	`<xs:attribute name="size" type="positive_integer_define"/>`

Attribute `parameter / @id`

Namespace	No namespace
Annotations	ID of the attribute.
Type	id_define
Properties	use: required
Facets	pattern ((0?x\d+)|\d+)
Used by	Element parameter

Source	`<xs:attribute name="id" use="required" type="id_define">`
	`  <xs:annotation>`
	`    <xs:documentation>ID of the attribute.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute `parameter / @set_opcode`

Namespace	No namespace
Annotations	Opcode for setting the parameter.
Type	id_define
Properties	use: required
Facets	pattern ((0?x\d+)|\d+)
Used by	Element parameter

Source	`<xs:attribute name="set_opcode" use="required" type="id_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Opcode for setting the parameter.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute `parameter / @save_opcode`

Namespace	No namespace
Annotations	Opcode for saving the parameter.
Type	id_define
Properties	use: required
Facets	pattern ((0?x\d+)|\d+)
Used by	Element parameter

Source	`<xs:attribute name="save_opcode" use="required" type="id_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Opcode for saving the parameter.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`

Attribute `parameter / @name`

Namespace	No namespace
Annotations	Parameter name

Properties	use:	`required`
Used by	Element	parameter

Source	`<xs:attribute name="name" use="required">`
	`  <xs:annotation>`
	`    <xs:documentation>Parameter name</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`	

Attribute parameters / @parameter_base

Namespace	No namespace	
Annotations		
Type	base_code_define	
Properties	content:	`simple`
Used by	Element	parameters

Source	`<xs:attribute name="parameter_base" type="base_code_define">`
	`  <xs:annotation>`
	`    <xs:documentation/>`
	`  </xs:annotation>`
	`</xs:attribute>`	

Attribute parameters / @opcode_base

Namespace	No namespace	
Annotations		
Type	base_code_define	
Properties	content:	`simple`
Used by	Element	parameters

Source	`<xs:attribute name="opcode_base" type="base_code_define">`
	`  <xs:annotation>`
	`    <xs:documentation/>`
	`  </xs:annotation>`
	`</xs:attribute>`	

Attribute component_define / @name

Namespace	No namespace	
Properties	use:	`required`
Used by	Complex Type	component_define
Source	`<xs:attribute name="name" use="required"/>`	

Attribute component_define / @kind

Namespace	No namespace	
Annotations	`Choice between active, passive, and queued.`	
Type	component_types_define	
Properties	use:	`required`
Facets	enumeration	`active`
	enumeration	`passive`
	enumeration	`queued`
Used by	Complex Type	component_define

Source	`<xs:attribute name="kind" use="required" type="component_types_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Choice between active, passive, and queued.</xs:documentation>`
	`  </xs:annotation>`
	`</xs:attribute>`	

Attribute component_define / @namespace

Namespace	No namespace
Annotations	The namespace in which the component is located in.
Used by	Complex Type component_define
Source	<xs:attribute name="namespace"> <xs:annotation> <xs:documentation>The namespace in which the component is located in.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute component_define / @modeler

Namespace	No namespace
Type	xs:boolean
Properties	content: simple
Used by	Complex Type component_define
Source	<xs:attribute name="modeler" type="xs:boolean"/>

Attribute return / @name

Namespace	No namespace
Annotations	Name of the argument.
Used by	Element return
Source	<xs:attribute name="name"> <xs:annotation> <xs:documentation>Name of the argument.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute return / @pass_by

Namespace	No namespace
Annotations	Defines how the arguments are passed.
Type	pass_by_define
Properties	content: simple
Facets	enumeration reference enumeration value enumeration pointer
Used by	Element return
Source	<xs:attribute name="pass_by" type="pass_by_define"> <xs:annotation> <xs:documentation>Defines how the arguments are passed.</xs:documentation> </xs:annotation> </xs:attribute>

Attribute return / @comment

Namespace	No namespace
Annotations	Comments about the argument.
Type	xs:string
Properties	content: simple
Used by	Element return
Source	<xs:attribute name="comment" type="xs:string"> <xs:annotation> <xs:documentation>Comments about the argument.</xs:documentation> </xs:annotation> </xs:attribute>

Element Group(s)

Element Group `import_header_define`

Namespace	No namespace
Diagram	 import_header_define include_header Type xs:anyURI Path to header file.
Used by	Complex Type component_define
Model	include_header
Children	include_header

Source	`<xs:group name="import_header_define">`
	`  <xs:sequence>`
	`    <xs:element name="include_header" type="xs:anyURI">`
	`      <xs:annotation>`
	`        <xs:documentation>Path to header file.</xs:documentation>`
	`      </xs:annotation>`
	`    </xs:element>`
	`  </xs:sequence>`
	`</xs:group>`

Element Group `type_size_choice_define`

Namespace	No namespace
Diagram	
Used by	Elements arg_define/arg, channel, external_arg_define/arg, return
Model	enum{0,1}
Children	enum

Source	`<xs:group name="type_size_choice_define">`
	`  <xs:sequence>`
	`    <xs:element minOccurs="0" ref="enum"/>`
	`  </xs:sequence>`
	`</xs:group>`

Element Group `external_arg_define`

Namespace	No namespace
Annotations	`Arguments without the pass by attributes. Used for events, commands, and telemetry.`
Diagram	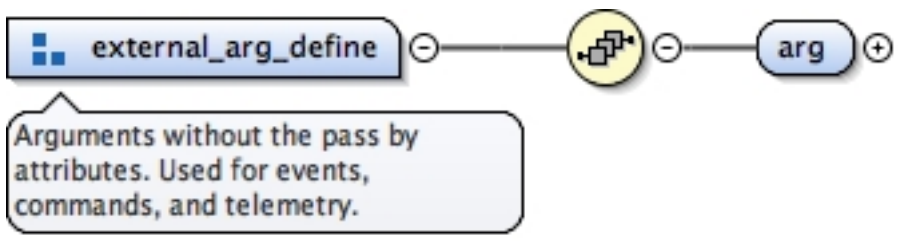 external_arg_define arg Arguments without the pass by attributes. Used for events, commands, and telemetry.
Used by	Elements args_define/args, event/args
Model	arg
Children	arg

Source	`<xs:group name="external_arg_define">`
	`  <xs:annotation>`
	`    <xs:documentation>Arguments without the pass by attributes. Used for events, commands, and telemetry.</xs:documentation>`
	`  </xs:annotation>`
	`  <xs:sequence>`
	`    <xs:element name="arg">`
	`      <xs:complexType>`
	`        <xs:choice minOccurs="0" maxOccurs="unbounded">`
	`          <xs:group ref="type_size_choice_define"/>`
	`          <xs:element ref="comment"/>`
	`        </xs:choice>`
	`        <xs:attribute name="name" use="required">`
	`          <xs:annotation>`
	`            <xs:documentation>Name of the argument.</xs:documentation>`
	`          </xs:annotation>`
	`        </xs:attribute>`
	`        <xs:attribute name="comment" type="xs:string">`

```
          <xs:annotation>
            <xs:documentation>Comments about the argument.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attributeGroup ref="type_size_choice_define"/>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:group>
```

Element Group `args_define`

Namespace	No namespace
Diagram	
Used by	Element command
Model	args
Children	args
Source	

```
<xs:group name="args_define">
  <xs:sequence>
    <xs:element name="args">
      <xs:annotation>
        <xs:documentation>Command arguments.</xs:documentation>
      </xs:annotation>
      <xs:complexType>
        <xs:group minOccurs="0" maxOccurs="unbounded" ref="external_arg_define"/>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:group>
```

Element Group `arg_define`

Namespace	No namespace
Annotations	Arguments with the pass by attribute.
Diagram	
Used by	Element interface_define/args
Model	arg
Children	arg
Source	

```
<xs:group name="arg_define">
  <xs:annotation>
    <xs:documentation>Arguments with the pass by attribute.</xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="arg">
      <xs:complexType>
        <xs:choice minOccurs="0" maxOccurs="unbounded">
          <xs:group ref="type_size_choice_define"/>
          <xs:element ref="comment"/>
        </xs:choice>
        <xs:attribute name="name" use="required">
          <xs:annotation>
            <xs:documentation>Name of the argument.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attribute name="pass_by" type="pass_by_define">
          <xs:annotation>
            <xs:documentation>Defines how the arguments are passed.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attribute name="comment" type="xs:string">
          <xs:annotation>
            <xs:documentation>Comments about the argument.</xs:documentation>
          </xs:annotation>
        </xs:attribute>
        <xs:attributeGroup ref="type_size_choice_define"/>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:group>
```

Attribute Group(s)

Attribute Group `type_size_choice_define`

Namespace	No namespace
Diagram	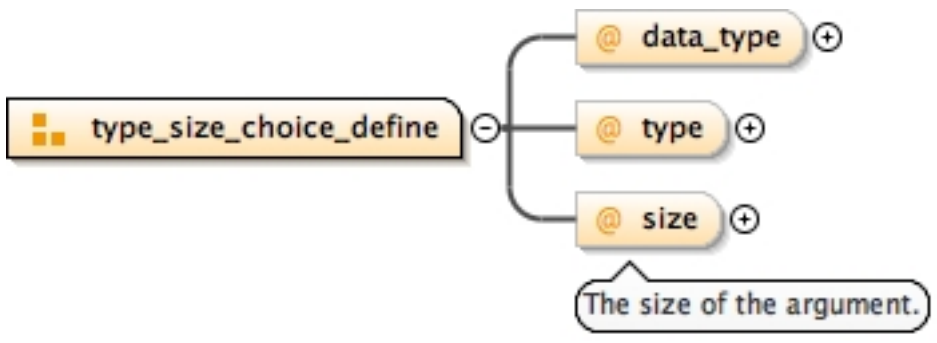 type_size_choice_define data_type type size The size of the argument.
Used by	Elements arg_define/arg, channel, external_arg_define/arg, return

Attributes

QName	Type	Use	
data_type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	
size	xs:nonNegativeInteger	optional	
	The size of the argument.		
type	union of(xs:string, restriction of xs:token, restriction of xs:token)	optional	

Source

```
<xs:attributeGroup name="type_size_choice_define">
  <xs:attribute name="data_type">
    <xs:simpleType>
      <xs:union memberTypes="xs:string">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="string"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="ENUM"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:union>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="type">
    <xs:simpleType>
      <xs:union memberTypes="xs:string">
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="string"/>
          </xs:restriction>
        </xs:simpleType>
        <xs:simpleType>
          <xs:restriction base="xs:token">
            <xs:enumeration value="ENUM"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:union>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="size" type="xs:nonNegativeInteger">
    <xs:annotation>
      <xs:documentation>The size of the argument.</xs:documentation>
    </xs:annotation>
  </xs:attribute>
</xs:attributeGroup>
```