



Message Implementation Guideline

BPI (Bring Parcels AB) subset BIG14

based on

IFTMIN

Instruction message

Bring IFTMIN

Version: 1
Variant: 3
Issue date: 2015-05-29
Author: Eva H Walldow

1 Message Structure	3
2 Branching Diagram	5
3 Segments	7
4 Example	38

Change Log BPI IFTMIN

Date	Version	Comments
2013-10-29	Version 1_2	<ul style="list-style-type: none">- New services (FTX+SSR) added: 0015,0016,0017,0033,0034,0094- -Text added (RFF+SRN) 'and also mandatory for product 349 to Sweden'
2014-05-23	Version 1_3	<ul style="list-style-type: none">- New products added: 0011 – Box delivery , 0348 – CarryOn HomeShopping BulkSplit Return- New service added: 0018 – Swap- NAD+ZRR and NAD+DP separated- NAD+DP required for PickUP Point/Locker delivery
2015-05-29	Version 1_3	<ul style="list-style-type: none">- Products 0319 and 0360 removed- Service 0033 corrected to 1133- Service 0034 corrected to 1134- Service 0094 corrected to 1063- New services added: 1094 – Delivery notification to sender- New services added: 1095 - Delivery notification to 3rd party

Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0000	1	UNA	R	1	0	Service string advice
0000	2	UNB	M	1	0	Interchange header
0010	3	UNH	M	1	0	Message header
0020	4	BGM	M	1	0	Beginning of message
0030	5	CTA	C	1	0	Contact information
0040	6	COM	C	3	1	Communication contact
0050	7	DTM	R	1	1	Date/time/period
0050	8	DTM	C	1	1	Date/time/period
0080	9	MOA	C	1	1	Monetary amount
0090	10	FTX	R	1	1	Free text
0090	11	FTX	C	99	1	Free text
0090	12	FTX	C	1	1	Free text
0100	13	CNT	R	3	1	Control total
0190		SG3	C	3	1	RFF
0200	14	RFF	M	1	1	Reference
0470		SG8	R	1	1	TDT
0480	15	TDT	M	1	1	Transport information
0570		SG11	M	2	1	NAD-SG12
0580	16	NAD	M	1	1	Name and address
0610		SG12	C	1	2	CTA-COM
0620	17	CTA	M	1	2	Contact information
0630	18	COM	C	3	3	Communication contact
0570		SG11	M	1	1	NAD
0580	19	NAD	M	1	1	Name and address
0570		SG11	C	1	1	NAD
0580	20	NAD	M	1	1	Name and address
0570		SG11	C	1	1	NAD
0580	21	NAD	M	1	1	Name and address
0570		SG11	C	1	1	NAD-SG15
0580	22	NAD	M	1	1	Name and address
0750		SG15	C	4	2	RFF
0760	23	RFF	R	1	2	Reference
0900		SG18	R	999	1	GID-SG20-SG21-SG23
0910	24	GID	M	1	1	Goods item details
1060		SG20	C	3	2	MEA
1070	25	MEA	M	1	2	Measurements
1090		SG21	C	1	2	DIM

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used


Counter	No	Tag	St	MaxOcc	Level	Content
1100	26	DIM	M	1	2	Dimensions
1150		SG23	R	1	2	PCI-RFF
1160	27	PCI	R	1	2	Package identification
1170	28	RFF	C	1	3	Reference
2000	29	UNT	M	1	0	Message trailer
0000	30	UNZ	M	1	0	Interchange trailer

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

BPI (Bring Parcels AB) subset BIG14


IFTMIN

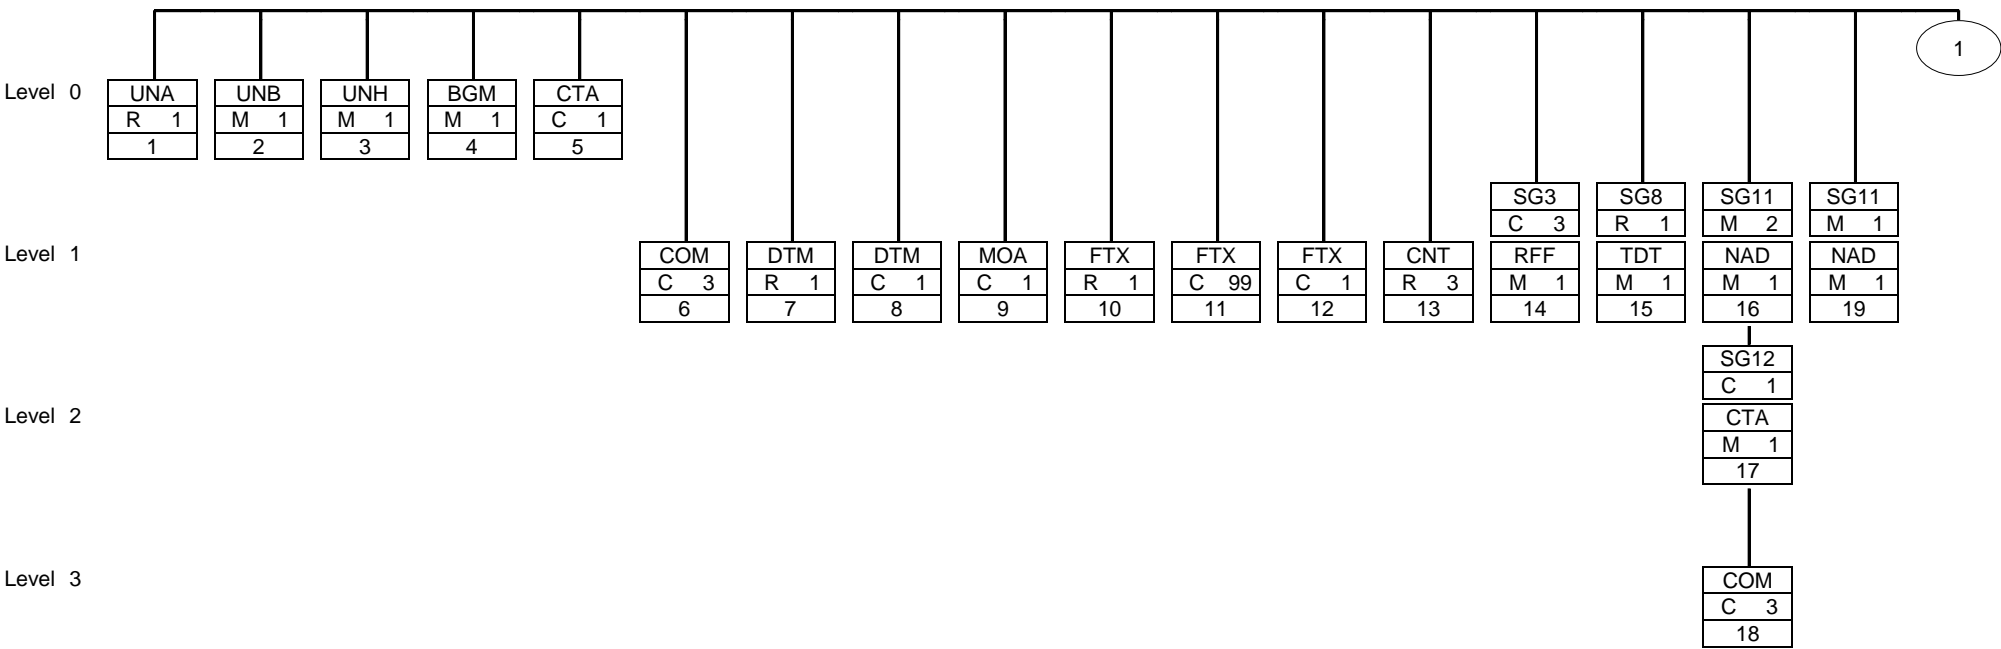

This is a branching diagram. Every variant of a segment or segment group described in the MIG appears exactly one times. The letters M and R characterise a 'mandatory' application status, whereas O means optional. The letter D is used for 'dependent' and the dependency will be described in comments. The number on the right-hand side explains the maximum occurence of this segment or segment group. The undermost number is the consecutive number of the segment within the guide.

BPI (Bring Parcels AB) subset BIG14

IFTMIN

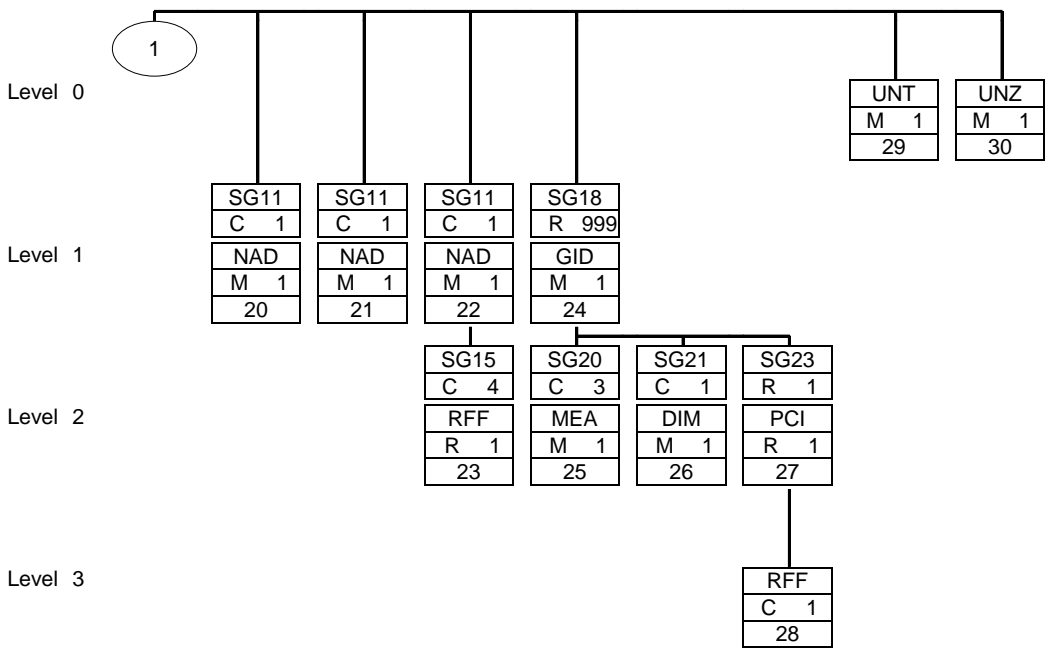

This is a branching diagram. Every variant of a segment or segment group described in the MIG appears exactly one times. The letters M and R characterise a 'mandatory' application status, whereas O means optional. The letter D is used for 'dependent' and the dependency will be described in comments. The number on the right-hand side explains the maximum occurrence of this segment or segment group. The undermost number is the consecutive number of the segment within the guide.

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

UNA

Seq. No.: 1
Status: R

Level: 0
Max. Occ.: 1

Service string advice

Description of segment: The service string advice shall begin with the upper case UNA immediately followed by six characters in the order shown below.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
UNA1	Component data element separator	an1	M	: = Component data element separator
UNA2	Data element separator	an1	M	+ = Data element separator
UNA3	Decimal notation	an1	M	Decimal mark may be . (point) or , (comma) . = Decimal notation
UNA4	Release indicator	an1	M	? = Release indicator
UNA5	Reserved for future use	an1	M	Insert a space character
UNA6	Segment terminator	an1	M	' = Segment terminator

Comment:

Example:

UNA:+.? '
UNA:+,? '

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

UNB

Seq. No.: 2
Status: M

Level: 0
Max. Occ.: 1

Interchange header

Description of segment: To identify an interchange.

Notes:

1. S001/0002 shall be 3 to indicate this version of the syntax.
2. The combination of the values carried in data elements S002, S003 and 0020 shall be used to identify uniquely the interchange, for the purpose of acknowledgement.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
S001	Syntax identifier		M	
0001	Syntax identifier	a4	M	UNOC = UN/ECE level C
0002	Syntax version number	n1	M	3 = Version 3
S002	Interchange sender		M	
0004	Sender identification	an..35	M	Sender's EDI-ID
0007	Partner identification code qualifier	an..4	R	30 = ISO 6523: Organization identification 14 = EAN International ZZZ = Mutually agreed with Bring
0008	Address for reverse routing	an..14	N	
S003	Interchange recipient		M	
0010	Recipient identification	an..35	M	Receiver's EDI-ID normally 7080003248381
0007	Partner identification code qualifier	an..4	R	14 = EAN International
0014	Routing address	an..14	N	
S004	Date/time of preparation		M	
0017	Date of preparation	n6	M	Date of preparation, format YYMMDD
0019	Time of preparation	n4	M	Time of preparation, format HHMM
0020	Interchange control reference	an..14	M	Interchange control reference (same as UNZ/0020)
S005	Recipient's reference, password		N	
0022	Recipient's reference/password	an..14	N	
0025	Recipient's reference/password qualifier	an2	N	
0026	Application reference	an..14	C	Name of originating system/application
0029	Processing priority code	a1	N	
0031	Acknowledgement request	n1	C	1 = Acknowledgement requested
0032	Communications agreement ID	an..35	N	
0035	Test indicator	n1	C	1 = Interchange is a test

Comment:

Values are only used as examples and must be replaced by relevant data

Example:

UNB+UNOC:3+BP01234567:ZZZ+7080003248381:14+101201:1105+1234567890++++1++1'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

UNH

Seq. No.: 3
Status: M

Level: 0
Max. Occ.: 1

Message header

Description of segment: A service segment starting and uniquely identifying a message. The message type code for the instruction message is IFTMIN.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
0062	Message reference number	an..14	M	Message reference number
S009	Message identifier		M	
0065	Message type	an..6	M	IFTMIN = Instruction message
0052	Message version number	an..3	M	D = Draft version/UN/EDIFACT Directory
0054	Message release number	an..3	M	04A = Release 2004 - A
0051	Controlling agency	an..2	M	UN = UN/CEFACT
0057	Association assigned code	an..6	R	BIG14 = Bring Interchange Group
0068	Common access reference	an..35	N	
S010	Status of the transfer		N	
0070	Sequence of transfers	n..2	N	
0073	First and last transfer	a1	N	

Comment:

Example:

UNH+1234+IFTMIN:D:04A:UN:BIG14'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

BGM

Seq. No.: 4
Status: M

Level: 0
Max. Occ.: 1

Beginning of message

Description of segment: A segment to indicate the beginning of a message and to transmit identifying number and type of the message.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C002	Document/message name		R	610 = Forwarding instructions
1001	Document name code	an..3	R	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
1000	Document name	an..35	N	
C106	Document/message identification		R	Message identifier
1004	Document identifier	an..35	R	
1056	Version identifier	an..9	N	
1060	Revision identifier	an..6	N	
1225	Message function code	an..3	R	1 = Cancellation 5 = Replace 9 = Original
4343	Response type code	an..3	N	

Comment:

Use of replace and cancellation is allowed to Bring Parcels for B2B packages to DK,NO and SE and for B2C parcels to Norway provided that the package has not yet been scanned.
Consignment note number/ order number/ booking number/ date-time may be used as message identifier.

Example:

BGM+610+70123451234567898+9'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

CTA

Seq. No.: 5
Status: C

Level: 0
Max. Occ.: 1

Contact information

Description of segment: To identify a person or a department to whom communication should be directed.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
3139	Contact function code	an..3	R	BK = Electronic data interchange coordinator
C056	Department or employee details		C	
3413	Department or employee name code	an..17	N	
3412	Department or employee name	an..35	C	Department/employee name

Comment:

Example:

CTA+BK+:EDI dep./ Eva HW'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

COM

Seq. No.: 6
Status: C

Level: 1
Max. Occ.: 3

Communication contact

Description of segment: A segment to identify a communication number of a person or department to whom communication should be directed.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C076	Communication contact		M	
3148	Communication address identifier	an..512	M	Phone number/e-mail address
3155	Communication address code qualifier	an..3	M	TE = Telephone AL = Cellular phone EM = Electronic mail

Comment:

Example:

COM+eva.hw@bring.com:EM'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

DTM

Seq. No.: 7
Status: R

Level: 1
Max. Occ.: 1

Date/time/period

Description of segment: A segment to indicate a date and time applying to the whole message, e.g., date and time of document issue.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C507	Date/time/period		M	
2005	Date or time or period function code qualifier	an..3	M	137 = Document/message date/time
2380	Date or time or period text	an..35	R	Document date/time
2379	Date or time or period format code	an..3	R	102 = CCYYMMDD 203 = CCYYMMDDHHMM

Comment:

Example:

DTM+137:20100810:102'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

DTM

Seq. No.: 8
Status: C

Level: 1
Max. Occ.: 1

Date/time/period

Description of segment: A segment to indicate a date and time applying to the whole message, e.g., date and time of document issue.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C507	Date/time/period		M	
2005	Date or time or period function code qualifier	an..3	M	234 = Collection date/time, earliest
2380	Date or time or period text	an..35	R	Document date/time
2379	Date or time or period format code	an..3	R	102 = CCYYMMDD 203 = CCYYMMDDHHMM

Comment:

Code 234 should be used for collection date/time - for future use.

Example:

DTM+234:20100810:102'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

MOA

Seq. No.: 9
Status: C

Level: 1
Max. Occ.: 1

Monetary amount

Description of segment: A segment to indicate a monetary value for entire consignment, e.g. insured value, invoice amount, disbursements, etc.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C516	Monetary amount		M	
5025	Monetary amount type code qualifier	an..3	M	22 = Cash on delivery amount
5004	Monetary amount	n..35	R	Amount
6345	Currency identification code	an..3	R	DKK = Danish Crowns EUR = Euro NOK = Norwegian Crowns SEK = Swedish Crowns Use ISO 4217 3 alpha code
6343	Currency type code qualifier	an..3	N	
4405	Status description code	an..3	N	

Comment:

Example:

MOA+22:4530.50:SEK'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

FTX

Seq. No.: 10

Level: 1

Free text

Status: R

Max. Occ.: 1

Description of segment: A segment to specify free form or processable supplementary information, such as status of transport, remarks to be printed on the transport documents (where required), consignment remarks, insurance instructions, etc., or any other additional information.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
4451	Text subject code qualifier	an..3	M	PRD = Product information
4453	Free text function code	an..3	N	
C107	Text reference		N	
4441	Free text description code	an..17	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
C108	Text literal		R	
4440	Free text	an..512	R	
				0330 = CarryOn Business 0331 = CarryOn Business Return 0332 = CarryOn Business BulkSplit 0333 = CarryOn Business BulkReturn 0334 = CarryOn Business BulkSplit 09.00 0335 = CarryOn Business 09.00 (limited use) 0336 = CarryOn Business Pallet 0337 = CarryOn Business Pallet Return (limited use) 0339 = CarryOn Business Pallet 09.00 (limited use) 0340 = CarryOn HomeShopping 0341 = CarryOn HomeShopping Return 0342 = CarryOn HomeShopping BulkSplit 0343 = CarryOn HomeShopping BulkReturn 0345 = CarryOn HomeShopping BulkSplit Mini 0348 = CarryOn HomeShopping Bulksplit Home Return 0349 = CarryOn HomeShopping BulkSplit Home 0350 = CarryOn Cash (limited use) 0359 = CarryOn Budget 0391 = CarryOn Business VIP (customer unique) 0392 = CarryOn Business Pallet VIP (customer unique)
4440	Free text	an..512	N	
4440	Free text	an..512	N	
4440	Free text	an..512	N	
3453	Language name code	an..3	N	
4447	Free text format code	an..3	N	

Comment:

Example:

FTX+PRD+++0342'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

FTX

Seq. No.: 11
Status: C

Level: 1
Max. Occ.: 99

Free text

Description of segment: A segment to specify free form or processable supplementary information, such as status of transport, remarks to be printed on the transport documents (where required), consignment remarks, insurance instructions, etc., or any other additional information.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
4451	Text subject code qualifier	an..3	M	SSR = Special service request
4453	Free text function code	an..3	N	
C107	Text reference		N	
4441	Free text description code	an..17	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
C108	Text literal		C	
4440	Free text	an..512	R	
				Additional service codes
				0003 = LQ (Limited quantity of dangerous goods)
				0010 = Optional Pickup Point
				0011 = Pickup Locker
				0015 = Delivery/Pickup evening
				0016 = Delivery/Pickup weekend
				0017 = Express
				0018 = Swap
				0019 = Desktop Delivery (customer unique)
				0029 = Special Services (customer unique)
				0039 = Delivery Indoors
				0041 = Flex Delivery
				0051 = COD (Cash On Delivery)
				0058 = MPS (Multi Parcel Shipment)
				0061 = ½ Pallet
				0062 = ¼ Pallet
				0069 = Domestic Air
				0079 = Delivery before 12:00 (for future use)
				0086 = Without Delivery
				0087 = Without Pickup
				0089 = Ad Hoc Pickup (limited use)
				0091 = eAdvising
				0097 = Flexi Size
				1063 = Contract-ID
				1094 = Delivery Notification to Sender
				1095 = Delivery Notification to 3. party
				1133 = ID Verification
				1134 = ID Individual Verification
4440	Free text	an..512	N	
4440	Free text	an..512	N	
4440	Free text	an..512	N	
3453	Language name code	an..3	N	
4447	Free text format code	an..3	N	

Comment:

Segment to be used once for each service.

Example:

FTX+SSR+++0051'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

FTX

Seq. No.: 12
Status: C

Level: 1
Max. Occ.: 1

Free text

Description of segment: A segment to specify free form or processable supplementary information, such as status of transport, remarks to be printed on the transport documents (where required), consignment remarks, insurance instructions, etc., or any other additional information.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
4451	Text subject code qualifier	an..3	M	ICN = Information for consignee
4453	Free text function code	an..3	N	
C107	Text reference		N	
4441	Free text description code	an..17	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
C108	Text literal		C	
4440	Free text	an..512	R	
4440	Free text	an..512	N	
4440	Free text	an..512	N	
4440	Free text	an..512	N	
3453	Language name code	an..3	N	
4447	Free text format code	an..3	N	
				Free text

Comment:

ICN -Information for consignee

Example:

FTX+ICN+++Stilles i garagen'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

CNT

Seq. No.: 13
Status: R

Level: 1
Max. Occ.: 3

Control total

Description of segment: A segment to specify totals for a consignment.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C270	Control		M	
6069	Control total type code qualifier	an..3	M	7 = Total gross weight 11 = Total number of packages 15 = Total consignment, cube
6066	Control total quantity	n..18	M	Quantity
6411	Measurement unit code	an..8	C	KGM = kilogram MTQ = cubic metre PCE = pieces

Comment:

6069 - code 11 required. Code 7 and/or 15 is optional

Example:

CNT+11:1:PCE'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG3	Status: C	Max. Occ.: 3	RFF
Segment:	RFF	Seq. No.: 14 Status: M	Level: 1 Max. Occ.: 1	Reference

Description of segment: A segment to express a reference which applies to the entire message such as: the document/ message number that is to be updated by this very message (according to data element 1225 Message function code in segment BGM), booking reference, order number, insurance contract, etc.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C506	Reference		M	ANT = Consignee's reference (for future use) CU = Consignor's reference number SRN = Shipment reference number Reference
1153	Reference code qualifier	an..3	M	
1154	Reference identifier	an..70	R	
1156	Document line identifier	an..6	N	
4000	Reference version identifier	an..35	N	
1060	Revision identifier	an..6	N	

Comment:

For Bring Parcels: SRN is used for GS1 shipment id for Parcels shipped to the same recipient at the same time and also mandatory for product 349 to Sweden.

Example:

RFF+SRN:70123451234567898'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG8	Status: R	Max. Occ.: 1	TDT
Segment:	TDT	Seq. No.: 15 Status: M	Level: 1 Max. Occ.: 1	Transport information

Description of segment: A segment to indicate information related to a certain stage of the transport, such as mode, means and carrier.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
8051	Transport stage code qualifier	an..3	M	20 = Main-carriage transport
8028	Means of transport journey identifier	an..17	C	Trip-/Journey-/Flight identifier Only used between carriers
C220	Mode of transport		C	Use UN/ECE Recommendation No 19
8067	Transport mode name code	an..3	N	
8066	Transport mode name	an..17	N	
C001	Transport means		N	
8179	Transport means description code	an..8	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
8178	Transport means description	an..17	N	
C040	Carrier		R	For transport only shown codes are valid
3127	Carrier identifier	an..17	R	BPI = Bring Parcels AB
1131	Code list identification code	an..17	C	Not in use
3055	Code list responsible agency code	an..3	R	87 = Assigned by carrier
3128	Carrier name	an..35	N	
8101	Transit direction indicator code	an..3	N	
C401	Excess transportation information		N	
8457	Excess transportation reason code	an..3	N	
8459	Excess transportation responsibility code	an..3	N	
7130	Customer shipment authorisation identifier	an..17	N	
C222	Transport identification		N	
8213	Transport means identification name identifier	an..9	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
8212	Transport means identification name	an..35	N	
8453	Transport means nationality code	an..3	N	
8281	Transport means ownership indicator code	an..3	N	

Comment:

Example:

TDT+20++++BPI::87'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: M	Max. Occ.: 2	NAD-SG12
Segment:	NAD	Seq. No.: 16 Status: M	Level: 1 Max. Occ.: 1	Name and address

Description of segment: A segment to identify the party's name, address, and function.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
3035	Party function code qualifier	an..3	M	CZ = Consignor CN = Consignee
C082	Party identification details		C	
3039	Party identifier	an..35	M	Consignor/ Consignee identification number
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	R	87 = Assigned by carrier 91 = Assigned by seller or seller's agent
C058	Name and address		N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
C080	Party name		R	Consignor/Consignee Name Additional information (not handled by all Bring companies)
3036	Party name	an..35	M	
3036	Party name	an..35	C	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3045	Party name format code	an..3	N	
C059	Street		R	Consignor/Consignee Street address To be used for additional information.
3042	Street and number or post office box identifier	an..35	M	
3042	Street and number or post office box identifier	an..35	C	
3042	Street and number or post office box identifier	an..35	N	
3042	Street and number or post office box identifier	an..35	N	
3164	City name	an..35	R	Consignor/Consignee City Name
C819	Country sub-entity details		C	
3229	Country sub-entity name code	an..9	C	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
3228	Country sub-entity name	an..70	N	
3251	Postal identification code	an..17	R	
3207	Country name code	an..3	R	

Comment:

Example:

NAD+CZ+01234567::87++Consignor Name:Additional text+Vesterbrogade 5:3 etg.+Copenhagen V++1674+DK'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: M	Max. Occ.: 2	NAD-SG12
Group:	SG12	Status: C	Max. Occ.: 1	CTA-COM
Segment:	CTA	Seq. No.: 17 Status: M	Level: 2 Max. Occ.: 1	Contact information

Description of segment: A segment to identify a person or department within a party.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
3139	Contact function code	an..3	C	IC = Information contact
C056	Department or employee details		C	
3413	Department or employee name code	an..17	N	
3412	Department or employee name	an..35	C	

Comment:

Example:

CTA+IC+:Kalle'
CTA+IC'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: M	Max. Occ.: 2	NAD-SG12
Group:	SG12	Status: C	Max. Occ.: 1	CTA-COM
Segment:	COM	Seq. No.: 18 Status: C	Level: 3 Max. Occ.: 3	Communication contact

Description of segment: A segment to identify a communication number of a person or department to whom communication should be directed.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C076	Communication contact		M	
3148	Communication address identifier	an..512	M	Telephone number, Cellular number, E-mail address AL = Cellular phone TE = Telephone EM = Electronic mail
3155	Communication address code qualifier	an..3	M	

Comment:

Telephone number is only accepted in international format (containing + without blanks and dashes, and country number) or national format
Cellular number (qualifier AL) connected to Consignee is used for eAdvising

Example:

COM+?+46232498520:TE'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: M	Max. Occ.: 1	NAD
Segment:	NAD	Seq. No.: 19 Status: M	Level: 1 Max. Occ.: 1	Name and address

Description of segment: A segment to identify the party's name, address, and function.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
3035	Party function code qualifier	an..3	M	FP = Freight/charges payer
C082	Party identification details		R	
3039	Party identifier	an..35	M	Freight Payer identification number
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	R	87 = Assigned by carrier
C058	Name and address		N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
C080	Party name		N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3045	Party name format code	an..3	N	
C059	Street		N	
3042	Street and number or post office box identifier	an..35	N	
3042	Street and number or post office box identifier	an..35	N	
3042	Street and number or post office box identifier	an..35	N	
3042	Street and number or post office box identifier	an..35	N	
3164	City name	an..35	N	
C819	Country sub-entity details		N	
3229	Country sub-entity name code	an..9	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
3228	Country sub-entity name	an..70	N	
3251	Postal identification code	an..17	N	
3207	Country name code	an..3	N	

Comment:

This segment is mandatory and must contain the Bring Parcels customer number (8 or 11 digits)

Example:

NAD+FP+01234567::87'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: C	Max. Occ.: 1	NAD
Segment:	NAD	Seq. No.: 20 Status: M	Level: 1 Max. Occ.: 1	Name and address

Description of segment: A segment to identify the party's name, address, and function.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
3035	Party function code qualifier	an..3	M	DP = Delivery party
C082	Party identification details		R	
3039	Party identifier	an..35	R	4 or 6 digit PickUp Point/Locker ID
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	C	87 = Assigned by carrier
C058	Name and address		N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
C080	Party name		R	
3036	Party name	an..35	R	PickUp Point/Locker Name
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3045	Party name format code	an..3	N	
C059	Street		R	
3042	Street and number or post office box identifier	an..35	M	PickUp Point/Locker Street address
3042	Street and number or post office box identifier	an..35	C	To be used for additional information.
3042	Street and number or post office box identifier	an..35	N	
3042	Street and number or post office box identifier	an..35	N	
3164	City name	an..35	R	PickUp Point/Locker City Name
C819	Country sub-entity details		N	
3229	Country sub-entity name code	an..9	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
3228	Country sub-entity name	an..70	N	
3251	Postal identification code	an..17	R	PickUp Point/Locker Postal Code
3207	Country name code	an..3	R	PickUp Point/Locker Country Code ISO 3166 2 Alpha to be used

Comment:

Party DP is required for Optional PickUp Point/PickUp Locker to/in Denmark and recommended for Pick-up Point to/in Sweden

Example:

NAD+DP+1080::87++SwipBox Bilka+Skovvangen 40-42:X+Kolding++6000+DK'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: C	Max. Occ.: 1	NAD
Segment:	NAD	Seq. No.: 21 Status: M	Level: 1 Max. Occ.: 1	Name and address

Description of segment: A segment to identify the party's name, address, and function.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
3035	Party function code qualifier	an..3	M	ZRR = Return Address
C082	Party identification details		N	
3039	Party identifier	an..35	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
C058	Name and address		N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
3124	Name and address description	an..35	N	
C080	Party name		R	
3036	Party name	an..35	R	
3036	Party name	an..35	C	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3036	Party name	an..35	N	
3045	Party name format code	an..3	N	
C059	Street		R	Party Street and Number
3042	Street and number or post office box identifier	an..35	M	
3042	Street and number or post office box identifier	an..35	C	
3042	Street and number or post office box identifier	an..35	N	
3042	Street and number or post office box identifier	an..35	N	
3164	City name	an..35	R	City Name
C819	Country sub-entity details		N	
3229	Country sub-entity name code	an..9	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
3228	Country sub-entity name	an..70	N	Postal Code
3251	Postal identification code	an..17	R	
3207	Country name code	an..3	R	
				Country Code ISO 3166 2 Alpha to be used

Comment:

ZRR is to be used as return address when undeliverable goods is to be returned to other than consignor

Example:

NAD+ZRR+++Customer c/o Bring Parcels:c/o Andersson+Bordsvägen 3:X+Jönköping++55810+SE'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG11	Status: C	Max. Occ.: 1	NAD-SG15
Group:	SG15	Status: C	Max. Occ.: 4	RFF
Segment:	RFF	Seq. No.: 23 Status: R	Level: 2 Max. Occ.: 1	Reference

Description of segment: A segment to identify a reference used by a party.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C506	Reference		M	
1153	Reference code qualifier	an..3	M	ADE = Account number (For SE use Z01 or Z04) PQ = Payment reference (OCR/KID reference) ZCH = Check Digit (digit for amount - Required for OCR account NO) ZKK = Account type (DK) SS = Sellers reference number (Text reference) Z01 = Bankgiro account (SE only) Z04 = Postgiro account (SE only)
1154	Reference identifier	an..70	R	Account number/reference
1156	Document line identifier	an..6	N	
4000	Reference version identifier	an..35	N	
1060	Revision identifier	an..6	N	

Comment:

COD (Cash On Delivery) information

Example:

RFF+Z01:8719114'
 RFF+ADE:FI03040506060601'
 RFF+ZKK:11'
 RFF+ZCH:1'
 RFF+PQ:8485811688700304'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group: **SG18** Status: R Max. Occ.: 999 GID-SG20-SG21-SG23

Segment: **GID** Seq. No.: 24 Level: 1 **Goods item details**
Status: M Max. Occ.: 1

Description of segment: A segment to identify a goods item for which transport is undertaken. A goods item can be identified by up to three levels of packaging.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
1496	Goods item number	n..5	R	Consignment- or customs line number (sequential) Quantity CT = Carton - Package
C213	Number and type of packages		R	
7224	Package quantity	n..8	R	
7065	Package type description code	an..17	R	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
7064	Type of packages	an..35	N	
7233	Packaging related description code	an..3	N	
C213	Number and type of packages		N	
7224	Package quantity	n..8	N	
7065	Package type description code	an..17	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
7064	Type of packages	an..35	N	
7233	Packaging related description code	an..3	N	
C213	Number and type of packages		N	
7224	Package quantity	n..8	N	
7065	Package type description code	an..17	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
7064	Type of packages	an..35	N	
7233	Packaging related description code	an..3	N	
C213	Number and type of packages		N	
7224	Package quantity	n..8	N	
7065	Package type description code	an..17	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	
7064	Type of packages	an..35	N	

BPI (Bring Parcels AB) subset BIG14

IFTMIN

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
7233	Packaging related description code	an..3	N	

Comment:

For Bring Parcels the GID group (SG18) must be repeated for each package.

Example:

GID+1+1:CT'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group: **SG18** Status: R Max. Occ.: 999 GID-SG20-SG21-SG23

Group: **SG20** Status: C Max. Occ.: 3 MEA

Segment: **MEA** Seq. No.: 25 Level: 2 **Measurements**
Status: M Max. Occ.: 1

Description of segment: A segment to specify measurements, other than dimensions, applicable to a goods item.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
6311	Measurement purpose code qualifier	an..3	M	VOL = Volume WT = Weights AAW = Gross volume G = Gross weight ZLQ = Limited Quantity of dangerous goods KGM = kilogram MTQ = cubic metre Value/quantity
C502	Measurement details		R	
6313	Measured attribute code	an..3	R	
6321	Measurement significance code	an..3	N	
6155	Non-discrete measurement name code	an..17	N	
6154	Non-discrete measurement name	an..70	N	
C174	Value/range		R	
6411	Measurement unit code	an..8	M	
6314	Measure	an..18	R	
6162	Range minimum quantity	n..18	N	
6152	Range maximum quantity	n..18	N	
6432	Significant digits quantity	n..2	N	
7383	Surface or layer code	an..3	N	

Comment:

Weight and/or volume is normally not required for Bring Parcels

Example:

MEA+WT+G+KGM:6.5'

MEA+VOL+AAW+MTQ:0.5'

MEA+WT+ZLQ+KGM:4'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group: **SG18** Status: R Max. Occ.: 999 GID-SG20-SG21-SG23

Group: **SG21** Status: C Max. Occ.: 1 DIM

Segment: **DIM** Seq. No.: 26 Level: 2 **Dimensions**
Status: M Max. Occ.: 1

Description of segment: To specify dimensions applicable to a goods item.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
6145	Dimension type code qualifier	an..3	M	2 = Package dimensions (including goods) CMT = centimetre MTR = metre
C211	Dimensions		M	
6411	Measurement unit code	an..8	M	
6168	Length measure	n..15	R	
6140	Width measure	n..15	R	
6008	Height measure	n..15	R	

Comment:

Example:

DIM+2+CMT:60:50:100'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group:	SG18	Status: R	Max. Occ.: 999	GID-SG20-SG21-SG23
Group:	SG23	Status: R	Max. Occ.: 1	PCI-RFF
Segment:	PCI	Seq. No.: 27 Status: R	Level: 2 Max. Occ.: 1	Package identification

Description of segment: A segment to specify marks and numbers of a goods item.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
4233	Marking instructions code	an..3	R	18 = Carrier's instructions Code 39 30 = Mark serial shipping container code UCC/EAN-128 SSCC (Serial shipping container code)
C210	Marks & labels		R	
7102	Shipping marks description	an..35	M	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
7102	Shipping marks description	an..35	N	
8275	Container or package contents indicator code	an..3	N	
C827	Type of marking		N	
7511	Marking type code	an..3	N	
1131	Code list identification code	an..17	N	
3055	Code list responsible agency code	an..3	N	

Comment:

Segment required for Bring Parcels

Example:

PCI+30+370404600000010750'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Group: **SG18** Status: R Max. Occ.: 999 GID-SG20-SG21-SG23

Group: **SG23** Status: R Max. Occ.: 1 PCI-RFF

Segment: **RFF** Seq. No.: 28 Level: 3 **Reference**
Status: C Max. Occ.: 1

Description of segment: A segment to identify a reference relating to the marks and numbers.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
C506	Reference		M	
1153	Reference code qualifier	an..3	M	CW = Package number
1154	Reference identifier	an..70	R	Package id
1156	Document line identifier	an..6	N	
4000	Reference version identifier	an..35	N	
1060	Revision identifier	an..6	N	

Comment:

This segment is used to state original package id issued by consignor.

Example:

RFF+CW:123456'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Segment:

UNT

Seq. No.: 29
Status: M

Level: 0
Max. Occ.: 1

Message trailer

Description of segment: A service segment ending a message, giving the total number of segments in the message (including the UNH & UNT) and the control reference number of the message.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
0074	Number of segments in the message	n..6	M	
0062	Message reference number	an..14	M	

Comment:

Example:

UNT+27+1234'

BPI (Bring Parcels AB) subset BIG14**IFTMIN****Segment:****UNZ**Seq. No.: 30
Status: MLevel: 0
Max. Occ.: 1**Interchange trailer****Description of segment:** To end and check the completeness of an interchange.

EDIFACT			Application	
Tag	Name	Format	St	Use / Comments
0036	Interchange control count	n..6	M	
0020	Interchange control reference	an..14	M	

Comment:**Example:**

UNZ+1+1234567890'

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Example message

No.	Tag	Example
01	UNA	UNA:+.? ' UNA:+,? '
02	UNB	UNB+UNOC:3+BP01234567:ZZZ+7080003248381:14+101201:1105+12345678 90++++1++1 '
03	UNH	UNH+1234+IFTMIN:D:04A:UN:BIG14 '
04	BGM	BGM+610+70123451234567898+9 '
05	CTA	CTA+BK+:EDI dep./ Eva HW '
06	COM	COM+eva.hw@bring.com:EM '
07	DTM	DTM+137:20100810:102 '
08	DTM	DTM+234:20100810:102 '
09	MOA	MOA+22:4530.50:SEK '
10	FTX	FTX+PRD+++0342 '
11	FTX	FTX+SSR+++0051 '
12	FTX	FTX+ICN+++Stilles i garagen '
13	CNT	CNT+11:1:PCE '
14	SG3	
	RFF	RFF+SRN:70123451234567898 '
15	SG8	
	TDT	TDT+20++++BPI::87 '
16	SG11	
	NAD	NAD+CZ+01234567::87++Consignor Name:Additional text+Vesterbroga de 5:3 etg.+Copenhagen V++1674+DK '
17	SG12	
	CTA	CTA+IC+:Kalle ' CTA+IC '
18	COM	COM+?+46232498520:TE '
19	SG11	
	NAD	NAD+FP+01234567::87 '
20	SG11	
	NAD	NAD+DP+1080::87++SwipBox Bilka+Skovvangen 40-42:X+Kolding++6000 +DK '
21	SG11	
	NAD	NAD+ZRR+++Customer c/o Bring Parcels:c/o Andersson+Bordsvägen 3 :X+Jönköping++55810+SE '
22	SG11	
	NAD	NAD+PE+++COD recipient+Gustavlundsvägen 151E:X+Bromma++16714+SE ,
	SG15	

BPI (Bring Parcels AB) subset BIG14

IFTMIN

Example message

No.	Tag	Example
23	RFF	RFF+Z01:8719114 ' RFF+ADE:FI0304050606060601 ' RFF+ZKK:11 ' RFF+ZCH:1 ' RFF+PQ:8485811688700304 '
	SG18	
24	GID	GID+1+1:CT '
	SG20	
25	MEA	MEA+WT+G+KGM:6.5 ' MEA+VOL+AAW+MTQ:0.5 ' MEA+WT+ZLQ+KGM:4 '
	SG21	
26	DIM	DIM+2+CMT:60:50:100 '
	SG23	
27	PCI	PCI+30+370404600000010750 '
28	RFF	RFF+CW:123456 '
29	UNT	UNT+27+1234 '
30	UNZ	UNZ+1+1234567890 '