BRAC IT Change Request Document

Title	Asset Addition with Reference Number with existing asset		
CR ID	FAHOV2-643		
JIRA ID	FAHOV2-643		
Created by	Abu Saleh Md. Nafis	Business Analyst	BRAC IT Services Limited
Reviewed by	Rafijur Rahman	Sr. Business Analyst	BRAC IT Services Limited

Confidential Level – External (Protected)

This document contains proprietary and confidential information of BRAC IT. The information enclosed in this Software Requirement Specification (SRS) is intended solely for the use of BRAC IT and the designated client, its nominated individuals, and/or partners. Unauthorized access, use, distribution, or disclosure of any information contained herein is strictly prohibited. The contents of this document must not be disclosed to any third party without prior written consent from BRAC IT. All rights to this document and the information contained within are reserved by BRAC IT.

Revision History

Date	Version	Created by	Description of change	Impacted Pages
7-Dec-25	1.0	Abu Saleh Md. Nafis	Initial Draft	
14-Dec-25	1.1	Abu Saleh Md. Nafis	Changes incorporated: • Asset Expenditure Feature Incorporated • Asset Expenditure Approval Feature Incorporated • Impacted Reports Feature Incorporated	 33 34 48
21-Dec-25	1.2	Abu Saleh Md. Nafis	Changes incorporated: • Asset Addition List Report Incorporated	 48
15-Jan-26	1.3	Abu Saleh Md. Nafis	Changes incorporated: • Asset Addition sequence format is changed • Child asset naming is replaced with Asset extension • Extension Asset can be sold separately • Extension Asset can be written off separately • Validation to restrict asset split for assets having asset extension • Additional field required in the asset split user story is removed from the document • Additional column added in the asset addition list report	 8 All 41 36 44 46 45
05-Apr-26	1.4	Abu Saleh Md. Nafis	Changes incorporated: • New Validation added for asset transactions having extended assets during asset addition • Validation added for asset sale and write-off during bulk upload via excel • Automatically asset assignments with asset transaction will take place if any asset has already been assigned to any employee and new extended asset is added. • Asset Sale value will be assigned to parent asset and then gradually to extended assets.	 8 37,41 12 41
16-Apr-26	1.5	Abu Saleh Md. Nafis	Changes incorporated: • All the impairment related business has been removed from entire document	 All
29-Apr-26	1.6	Abu Saleh Md. Nafis	Changes incorporated: • Parent asset will be restricted from Transfer, Shipment, Write-off, and Sale when a new child asset addition is acknowledged but pending approval. • Child asset addition will be restricted in HOFIN if the parent asset is already involved in a Transfer, Shipment, Write-off, or Sale transaction. • Parent asset will be restricted from Transfer, Shipment, Write-off, and Sale while the new child asset addition is pending acknowledgement. • Individual disposal is allowed only for child assets. Selecting a parent asset for disposal will dispose of the parent and all associated child assets together. A parent without child assets can be disposed of independently. • To dispose of an individual child asset, both the parent and child assets must first be unassigned. After disposal, the remaining assets can be reassigned as required. • Child Disposal in Progress: During child asset addition, if any associated child asset is under a disposal process, the parent asset will be restricted from all applicable transactions.	 All

Purpose

The current fixed asset management system handles asset additions by simply aggregating the cost of additions with the existing parent asset's price and recalculating the unit price. The proposed change introduces the concept of creating a separate asset entity under the parent asset for each addition, ensuring better control, traceability, and compliance with accounting standards. The change will also enforce a minimum asset price threshold, ensure proper depreciation calculation, and introduce parent & added asset relationships in the system. The Change and scope of this CR is applicable across the whole fixed asset system (FOFA & HOFA)

Users

The users of this document are Business Analysts, Software Engineers, Quality Assurance, Product Owner, Project Manager and Stakeholders from BRAC Bangladesh Fixed Asset users.

Scope of this CR

Scope Identification	Description
In Scope	The scope of this document includes, – New process for asset addition in the system by generating a new asset entity instead of merging costs with the parent asset. – Strengthen asset tracking and reporting through parent & extended/subsidiary asset relationships. – Introduce new fields for parent asset details in the asset profile. – New tab for addition history on asset profile details. – New validation on extended/subsidiary assets. – New list view for extended/subsidiary assets. – Asset split conditions and extended validation with additional fields. – The Change and scope of this CR is applicable across the whole fixed asset system (FOFA & HOFA)
Out of Scope	• Extended asset addition from branch offices is out of scope; extended assets can only be added through the Head Office Finance (HOFIN) module • Anything not mentioned in the SRS is out of scope.

Workflow

N/A

Table of Contents

List of Features & Stories 6

Features 8

1. Asset Serial Global List | F01 | <Feature JIRA ID> 8
   - 1.1. A new asset will be added to the Global Asset Serial List upon asset addition from HOFIN| < Story ID> | <Story JIRA ID> 8
   - 1.2. Parent asset information in the Asset Profile Details pop-up window | < Story ID> | <Story JIRA ID> 9
2. Asset Assign | F02 | <Feature JIRA ID> 11
   - 2.1. New validation will be added on not letting the user select any extended/subsidiary asset | F02S01 | <Story JIRA ID> 11
3. Asset Unassign | F03 | <Feature JIRA ID> 13
   - 3.1. New validation will be added on not letting the user select any extended/subsidiary asset | F03S01 | <Story JIRA ID> 13
4. Internal Movement | F04 | <Feature JIRA ID> 15
   - 4.1. New validation will be added on not letting the user select any extended/subsidiary asset | F04S01 | <Story JIRA ID> 15
5. Transaction List | F05 | <Feature JIRA ID> 17
   - 5.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F05S01 | <Story JIRA ID> 17
6. Transaction Approval List | F06 | <Feature JIRA ID> 18
   - 6.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F06S01 | <Story JIRA ID> 18
7. Asset Assign Acknowledgement | F07 | <Feature JIRA ID> 19
   - 7.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F07S01 | <Story JIRA ID> 19
8. Asset Shipment | F08 | <Feature JIRA ID> 20
   - 8.1. New validation will be added on not letting the user select any extended/subsidiary asset | F08S01 | <Story JIRA ID> 20
9. Asset Shipment Challan Approval List | F09 | <Feature JIRA ID> 23
   - 9.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F09S01 | <Story JIRA ID> 23
10. Asset Shipment In-Challan | F10 | <Feature JIRA ID> 24
    - 10.1. New validation will be added on not letting the user select any extended/subsidiary asset and | F10S01 | <Story JIRA ID> 24
11. Asset Single Out Challan | F11 | <Feature JIRA ID> 26
    - 11.1. New validation will be added on not letting the user select any extended/subsidiary asset | F11S01 | <Story JIRA ID> 26
12. Asset Single Out Challan Approval List | F12 | <Feature JIRA ID> 29
    - 12.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F12S01 | <Story JIRA ID> 29
13. Asset Single In-Challan | F13 | <Feature JIRA ID> 30
    - 13.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F13S01 | <Story JIRA ID> 30
14. Asset Receivable List | F14 | <Feature JIRA ID> 32
    - 14.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F14S01 | <Story JIRA ID> 32
15. Asset Returnable List | F15 | <Feature JIRA ID> 33
    - 15.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F15S01 | <Story JIRA ID> 33
16. Asset Expenditure | F16 | <Feature JIRA ID> 34
    - 16.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F16S01 | <Story JIRA ID> 34
17. Asset Expenditure Approval| F17 | <Feature JIRA ID> 35
    - 17.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F17S01 | <Story JIRA ID> 35
18. Asset Write Off | F18 | <Feature JIRA ID> 36
    - 18.1. New validation will be added on not letting the user select any extended/subsidiary asset | F18S01 | <Story JIRA ID> 36
19. Asset Write Off List | F19 | <Feature JIRA ID> 38
    - 19.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F19S01 | <Story JIRA ID> 38
20. Asset Write Off Approval List | F20 | <Feature JIRA ID> 39
    - 20.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F20S01 | <Story JIRA ID> 39
21. Asset Sale | F21 | <Feature JIRA ID> 40
    - 21.1. New validation will be added on not letting the user select any extended/subsidiary asset | F21S01 | <Story JIRA ID> 40
22. Asset Sale List | F22 | <Feature JIRA ID> 42
    - 22.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F22S01 | <Story JIRA ID> 42
23. Asset Sale Approval List | F23 | <Feature JIRA ID> 43
    - 23.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F23S01 | <Story JIRA ID> 43
24. Asset Split | F24 | <Feature JIRA ID> 45
    - 24.1. Validation to Restrict Asset Split for Assets Having Assets Extension | F24S01 | <Story JIRA ID> 45
25. New and Existing Impacted Reports | F25 | <Feature JIRA ID> 46
    - 25.1. Asset Addition List Report | F25S01 | <Story JIRA ID> 46
    - 25.2. Asset List Report | F25S02 | <Story JIRA ID> 48
    - 25.3. Asset Register Report | F25S03 | <Story JIRA ID> 49

25.4. Asset Schedule Report | F25S04 | <Story JIRA ID> 50
25.5. Asset Disposal Sale Report | F25S05 | <Story JIRA ID> 51
25.6. Asset Write off & Offline Transfer Report | F25S06 | <Story JIRA ID> 52
25.7. Asset Valuation Report | F25S07 | <Story JIRA ID> 53
25.8. Asset Transaction History Report | F25S08 | <Story JIRA ID> 54
25.9. Asset Receivable Report | F25S09 | <Story JIRA ID> 55
25.10. Asset Returnable Report | F25S10 | <Story JIRA ID> 56
25.11. Asset Tracking Report | F25S11 | <Story JIRA ID> 57
25.12. Asset Registration Report | F25S12 | <Story JIRA ID> 58
25.13. Asset Depreciation Statement (Serial wise) | F25S13 | <Story JIRA ID> 59
25.14. Asset Depreciation Statement (Group wise) | F25S14 | <Story JIRA ID> 60
25.15. Asset Depreciation History (Serial wise) | F25S15 | <Story JIRA ID> 61
25.16. Asset Depreciation History (Group wise) | F25S16 | <Story JIRA ID> 62

Risk Analysis 64

Change Effort Estimation 64

1. Effort Estimation 64

2. CR Accumulation 64

List of Features & Stories

Feature ID	Feature Title	Story ID	JIRA ID	Story Title
F01	Asset Serial Global List	F01S01		A new asset will be added to the Global Asset Serial List upon asset addition
		F01S02		Parent asset information in the Asset Profile Details pop-up window
F02	Asset Assign	F02S01		New validation will be added on not letting the user select any extended/subsidiary asset
F03	Asset Unassign	F03S01		New validation will be added on not letting the user select any extended/subsidiary asset
F04	Internal Movement	F04S01		New validation will be added on not letting the user select any extended/subsidiary asset
F05	Transaction List	F05S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F06	Transaction Approval List	F06S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F07	Asset Assign Acknowledgement	F07S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F08	Asset Shipment	F08S01		New validation will be added on not letting the user select any extended/subsidiary asset
F09	Asset Shipment Challan Approval List	F09S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F10	Asset Shipment In-Challan	F10S01		New validation will be added on not letting the user select any extended/subsidiary asset
F11	Asset Single Out Challan	F11S01		New validation will be added on not letting the user select any extended/subsidiary asset
F12	Asset Single Out Challan Approval List	F12S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F13	Asset Single In-Challan	F13S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F14	Asset Receivable List	F14S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F15	Asset Returnable List	F15S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F16	Asset Expenditure	F16S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F17	Asset Expenditure Approval List	F17S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F18	Asset Write-Off	F18S01		New validation will be added on not letting the user select any extended/subsidiary asset
F19	Asset Write-Off List	F19S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F20	Asset Write-Off Approval List	F20S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F21	Asset Sale	F21S01		New validation will be added on not letting the user select any extended/subsidiary asset
F22	Asset Sale List	F22S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F23	Asset Sale Approval List	F23S01		Extended/Subsidiary asset will show with right indentation below parent asset on the list view
F24	Asset Split	F24S01		Validation to Restrict Asset Split for Assets Having Assets Extension
F25	New and Existing Impacted Reports	F25S01		Asset Addition List Report
		F25S02		Asset List Report
		F25S03		Asset Register Report
		F25S04		Asset Schedule Report
		F25S05		Asset Disposal Sale Report
		F25S06		Asset Write-off & Offline Transfer Report
		F25S07		Asset Valuation Report
		F25S08		Asset Transaction History Report
		F25S09		Asset Receivable Report
		F25S10		Asset Returnable Report

		F25S11		Asset Tracking Report
		F25S12		Asset Registration Report
		F25S13		Asset Depreciation Statement (Serial Wise) Report
		F25S14		Asset Depreciation Statement (Group Wise) Report
		F25S15		Asset Depreciation History (Serial Wise) Report
		F25S16		Asset Depreciation History (Group Wise) Report

Features

1. Asset Serial Global List | F01 | <Feature JIRA ID>

1.1. A new asset will be added to the Global Asset Serial List upon asset addition from HOFIN| < Story ID> | <Story JIRA ID>

1.1.1. User Story:

As an authorized user, I want the system to create a new asset record in the Global Asset Serial List for every asset addition so that I can access, identify, and track the added asset separately as an individual asset entity.

1.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Profile from the top menu bar.
- Select and click on the Asset Serial Global List feature.

1.1.3. Actors:

- Authorized user.

1.1.4. Scope:

- **Current Scope:** Currently fixed asset management system handles asset additions by simply aggregating the cost of additions with the existing parent asset's price and recalculating the unit price.
- **New Scope:**
  i. The proposed change introduces the concept of creating a separate asset entity under the parent asset for each addition, ensuring better control, traceability, and compliance with accounting standards.

1.1.5. Pre-condition:

- Parent asset must already exist and be active.
- Asset addition amount must meet the minimum asset capitalization threshold defined in the system.
- Asset registration must be done with the asset addition condition.

1.1.6. Impacted Areas:

- Asset Serial Global List
- Reports:
  i. Asset List,
  ii. Asset Register,
  iii. Fixed Asset Tracking Report,
  iv. Asset Transaction History

1.1.7. Mock-up/ Prototypes:

N/A

1.1.8. Requirements:

- When an asset addition is approved and executed in the fixed asset system, via HOFIN, the system will register the additional asset as a separate standalone asset in the Asset Serial Global List,
  i. A new standalone asset will be listed in the Asset Serial Global List with same serial number of parent asset with hyphen **(i.e. BBDASRXXXXXX-1, BBDASRXXXXXX-2).**
  ii. Asset will be listed directly in the asset serial global list and can be found individually from the list upon search.
  iii. System must generate a unique Asset Serial Number for each asset addition.
  iv. Parent Asset information for the asset addition will be presented in the added asset's Asset Profile Details pop-up window. [F01S02].
- No impact will be made on the Parent Asset (the asset with which new asset is being added) on the Asset Serail Global List. Purchase value, Written Down Value, Remaining Lifetime, and all the other information will remain unchanged.
- No new asset can be added under an extended asset. Asset addition will only be allowed at the parent asset level.
- When initiating asset addition from the Head Office Finance module, the Asset dropdown must display only Parent Asset serials. Extended assets must not appear in the selection list.
- During asset addition, if the asset (with or without) extended asset is involved in any pending asset transaction—such as Asset Assign, Unassign, Internal Movement, Transaction List, Transaction Approval List, or Asset Assign Acknowledgement—the system will restrict the addition process and will not allow the operation to proceed until the pending transaction is completed. The system will show following validation message for these two scenarios.
  - For parent asset in another pending transaction: "**Asset addition is not allowed. Parent asset % is pending in another transaction flow**.
  - For attempting addition under an extended asset: **"Asset addition is not allowed under an extended asset. Reference Asset ID: %."**
- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.

1.1.9. Assumptions:

- Minimum asset capitalization threshold is defined for the asset groups in the system.

1.1.10. Non-functional Requirements:

- N/A

1.1.11. Acceptance Criteria:

- When a user submits an asset addition, the system must generate a new unique Asset Serial Number.
- The newly created asset must appear in the Global Asset Serial List as a separate and standalone asset.

1.1.12. Exceptions:

- N/A

1.2. Parent asset information in the Asset Profile Details pop-up window | < Story ID> | <Story JIRA ID>

1.2.1. User Story:

As an authorized user, I want the system to present the parent asset information and the asset addition history in the Asset Profile Details pop-up window so that I can view and track the parent–extended asset relationship of assets and understand the addition history of any asset.

1.2.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Profile from the top menu bar.
- Select and click on the Asset Serial Global List feature.
- Click on the asset serial number.

1.2.3. Actors:

- Authorized user.

1.2.4. Scope:

- Current Scope: Currently there is no field for parent asset information and no tab particularly for the asset addition history in the Asset Profile Details pop-up window.
- New Scope:
  i. A new field will be added to the asset profile details pop-up window named- Parent Asset.
  ii. Asset serial number of parent assets will be shown in the newly added Parent Asset field in the Asset Profile Details of the assets added as an addition to existing assets.
  iii. A new tab will be added to the Asset Profile Details pop-up window named Asset Addition containing the list of added Extended/subsidiary asset added under that particular asset with other relevant information.

1.2.5. Pre-condition:

- Asset addition must be acknowledged and approved in the HOFA and HOFIN system respectively.

1.2.6. Impacted Areas:

- Asset Global Serial List feature- Asset Profile Details pop-up window.

1.2.7. Mock-up/ Prototypes:

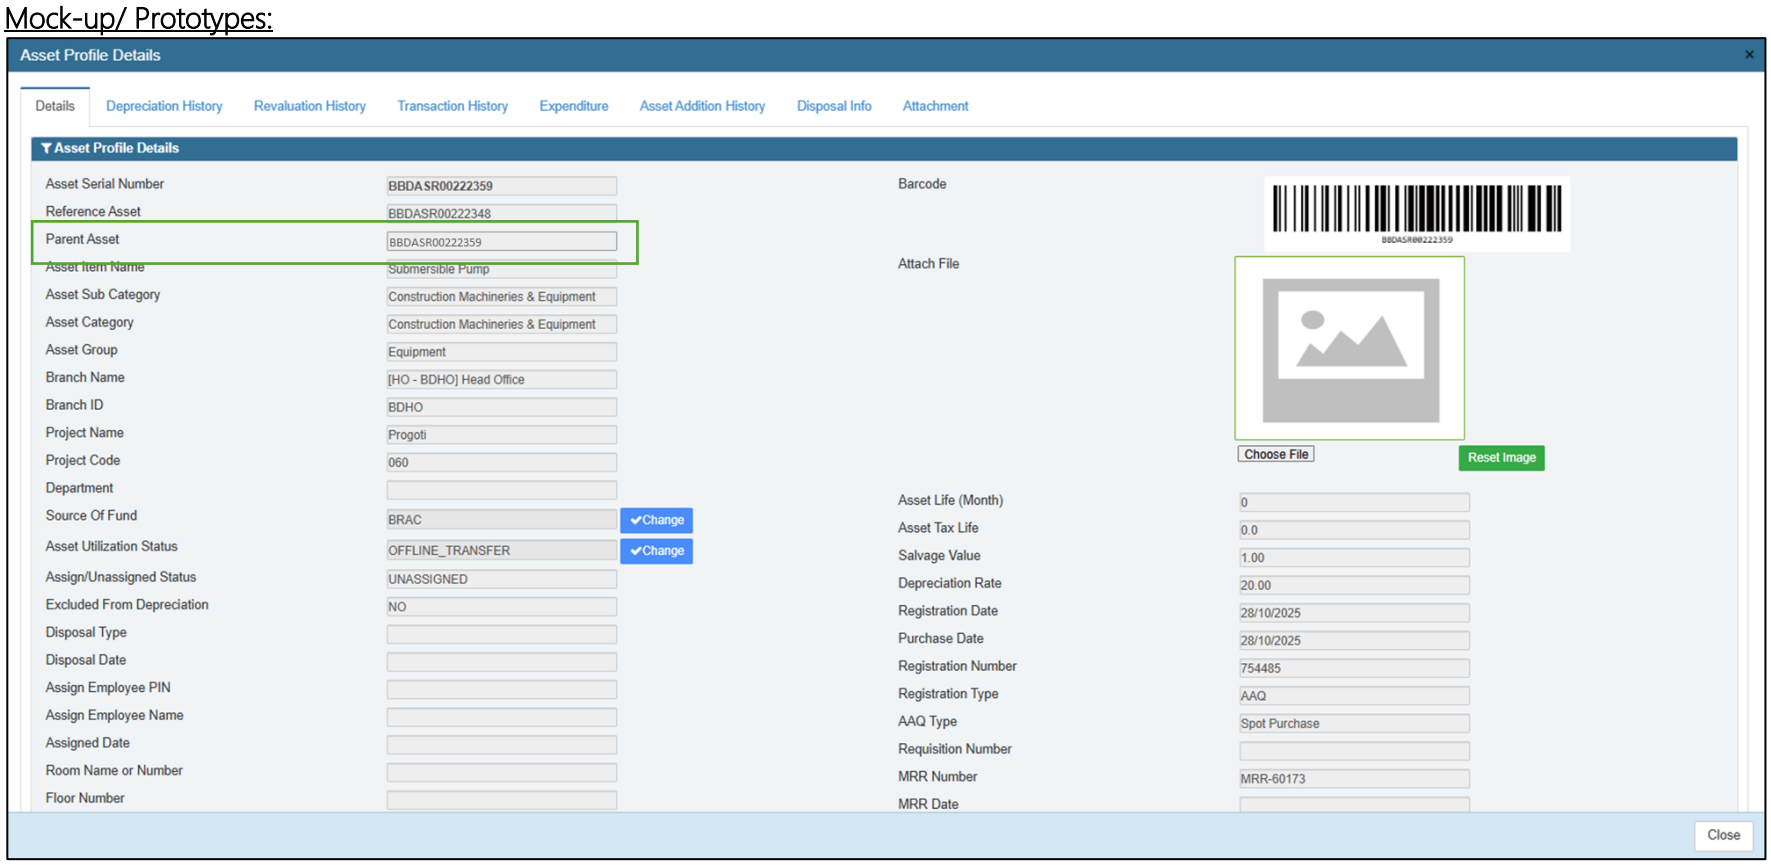


Figure: Newly added **Parent Asset** field- only for extended assets.

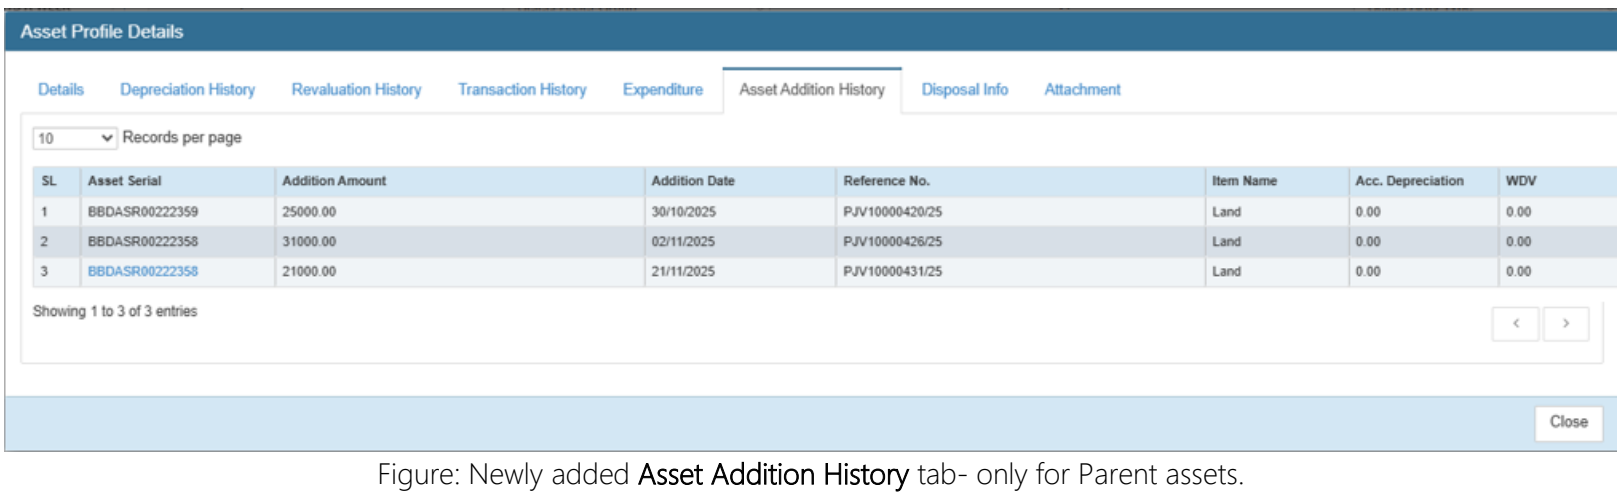


Figure: Newly added **Asset Addition History** tab- only for Parent assets.

1.2.8. Requirements:

- A new field will be added to the Asset Profile Details pop-up window named "**Parent Asset**" that will contain the asset serial number of the parent asset.
- The "**Parent Asset**" field will be visible for **only the Extended Assets** in the Asset Serial Global List. Only the extended/subsidiary asset will have the parent asset field and information in the Asset Profile Details.

- An additional tab will be added to the Asset Profile Details pop-up window named Addition History. The tab will be available only for the parent asset. No extended/subsidiary asset's Asset Profile Details pop-up window will contain the Asset Addition History tab. The Addition History tab will contain following requirements,
    i. Records per page: User can select the number of entries to view in a single list page from the record per page drop down. The drop-down values will be 10, 20, 50, and 100 with 10 being the default value.
    ii. Asset addition history data grid: Asset addition history data grid will contain the list of asset added to the particular parent assets over the time with
        a) **SL:** Serial number for the number of entries in a page.
        b) **Asset Serial:** Asset serial numbers of the added extended/subsidiary assets under the parent asset. Asset serial number will be hyperlinked to the Asset Profile Details window for the particular extended/subsidiary asset. A pop-up over pop-up layout will be implemented when user clicks on the hyperlinked active extended/subsidiary asset serial number. Closing the latest pop-up will lead the user to exactly previous pop-up or page.
        c) **Addition Amount:** Price of the added asset.
        d) **Addition Date:** Date of asset addition registration.
        e) **Reference Number:** Asset addition registration posted voucher number from HOFIN.
        f) **Item Name:** Item name of the additional asset.
        g) **Acc. Depreciation:** Accumulated depreciation of the additional extended/subsidiary assets.
        h) **WDV:** Written Down Value of the Extended/Subsidiary assets.
    iii. Entries per page: The page will show the range of entries in a given list page out of all the entries in the whole list.
- The Addition History tab will not be populated with data in the data grid if there is no asset added or registered as an asset addition for the particular asset but the Addition History tab will be visible for all the parent assets in the asset global serial list.
    - The Utilization Status of an extended asset can be updated independently without affecting the Utilization Status of its corresponding parent asset.
    - However, whenever the Assign/Unassign Status or Utilization Status of the parent asset is updated, the system will automatically synchronize the same status to all associated extended assets, overriding their existing status.

1.2.9. Assumptions:

- N/A

1.2.10. Non-functional Requirements:

- N/A

1.2.11. Acceptance Criteria:

- Parent Asset field appears under Details tab for only the extended/subsidiary assets' Asset Profile Details tab.
- Addition History tab is added to the Asset Profile Details pop-up window, and it is visible only for all the parent assets in the asset serial global list.
- All extended/subsidiary assets are accurately listed with details on Asset Serial, Addition Amount, Addition Date, Reference Number, Item Name, Acc. Depreciation, WDV as appropriate.

1.2.12. Exceptions:

- N/A

2. Asset Assign | F02 | <Feature JIRA ID>

2.1. New validation will be added on not letting the user select any extended/subsidiary asset | F02S01 | <Story JIRA ID>

2.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Assign** and ensure that when I perform **Asset Assign** on a parent asset, all associated extended/subsidiary assets automatically **be assigned** with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

2.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transaction from the top menu bar.
- Select and click on the Asset Assign feature.

2.1.3. Actors:

- Authorized user.

2.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  i. The user will not be able to select the extended/subsidiary assets.
  ii. Only parent assets will be available for selection.
  iii. When a transaction/operation is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.


2.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

2.1.6. Impacted Areas:

- Asset Assign
- Transaction List
- Transaction Approval List
- Asset Assign Acknowledgement

2.1.7. Mock-up/ Prototypes:

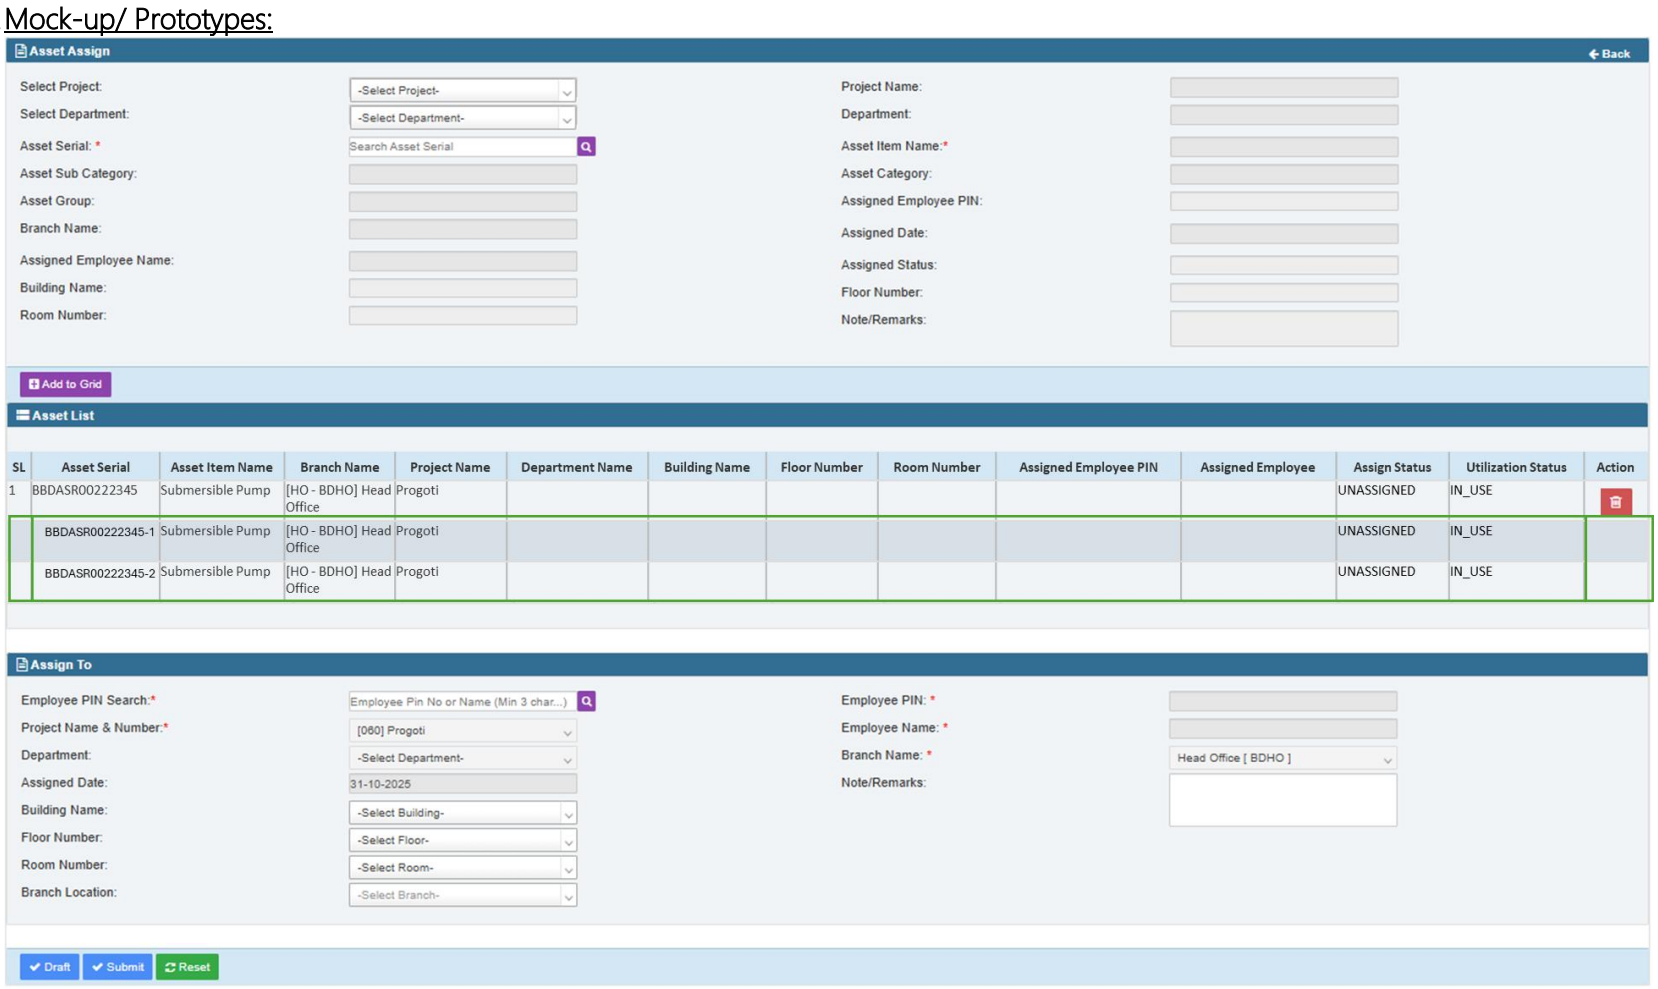

2.1.8. Requirements:

- Extended/subsidiary assets must not appear as selectable individually without the parent asset for **asset assign** feature when searched via Asset Serial field.
- If the user enters the asset serial number for a extended/subsidiary asset, system will show a validation message stating the selected asset not found.
- When a parent asset is selected, the system must automatically:
  i. Fetch all associated active extended/subsidiary assets and include them in the Asset List of Asset Assign feature.
  ii. For every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button for the extended/subsidiary assets.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  iv. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included list.

v. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.

- Upon submission, the system will behave as per current flow and list the transaction as per approval workflow.
- If a parent asset has one or more extended assets already assigned to an employee, any newly registered extended asset under the same parent will be automatically assigned to that same employee through the asset assignment and asset transaction functionality.
- During the asset assignment and transaction process, the system will automatically populate and record the Employee Name, PIN, Building, Floor, and Room details based on the existing assignment information.
- If an asset is already assigned to an employee, any newly added extended asset under that parent will be automatically assigned to the same employee through the asset transaction process, ensuring consistency in asset assignment. Here system will trigger both asset assignment and asset transaction approval automatically in the system.
-

2.1.9. Assumptions:

- N/A

2.1.10. Non-functional Requirements:

- N/A

2.1.11. Acceptance Criteria:

- Extended/subsidiary assets must not appear as selectable individually without the parent asset in the **Asset Assign** feature when searched via Asset Serial field.
- When a user manually enters an extended/subsidiary asset serial number, the system displays a validation message indicating that extended/subsidiary assets cannot be selected for Asset Assign.
- When a parent asset is selected, the system must automatically fetch and include all associated active extended/subsidiary assets to the **Asset List**.
- Auto-included extended/subsidiary assets must appear immediately under the parent asset in the **Asset List** with proper right indentation for visual distinction with no action buttons for the extended/subsidiary assets.
- Users must not be able to deselect or remove any extended/subsidiary asset that is auto included under a parent asset.
- Removing a parent asset from the assignment grid must automatically remove all associated extended/subsidiary assets from the grid.
- Inactive extended/subsidiary assets must not appear in the asset list.
- The system must apply the **Asset Assign** activity equally to the parent asset and all extended/subsidiary assets in the list.
- The parent asset and its extended/subsidiary assets must appear together in the **Transaction List, Transaction Approval List, and Asset Assign Acknowledgement** as part of the same transaction.

2.1.12. Exceptions:

- Upon **Asset Assign**, only the currently active and not merged extended/subsidiary assets will be considered for the above-mentioned requirements.

3. Asset Unassign | F03 | <Feature JIRA ID>

3.1. New validation will be added on not letting the user select any extended/subsidiary asset | F03S01 | <Story JIRA ID>

3.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Unassign** and ensure that when I perform **Asset Unassign** on a parent asset, all associated extended/subsidiary assets automatically **be unassign** with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

3.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transaction from the top menu bar.
- Select and click on the Asset Unassign feature.

3.1.3. Actors:

- Authorized user.

3.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  - i. The user will not be able to select the Extended/subsidiary assets individually.
  - ii. Only parent assets will be available for selection.
  - iii. When a transaction/operation is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.

3.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

3.1.6. Impacted Areas:

- Asset Unassign
- Transaction List
- Transaction Approval List
- Asset Assign Acknowledgement

3.1.7. Mock-up/ Prototypes:

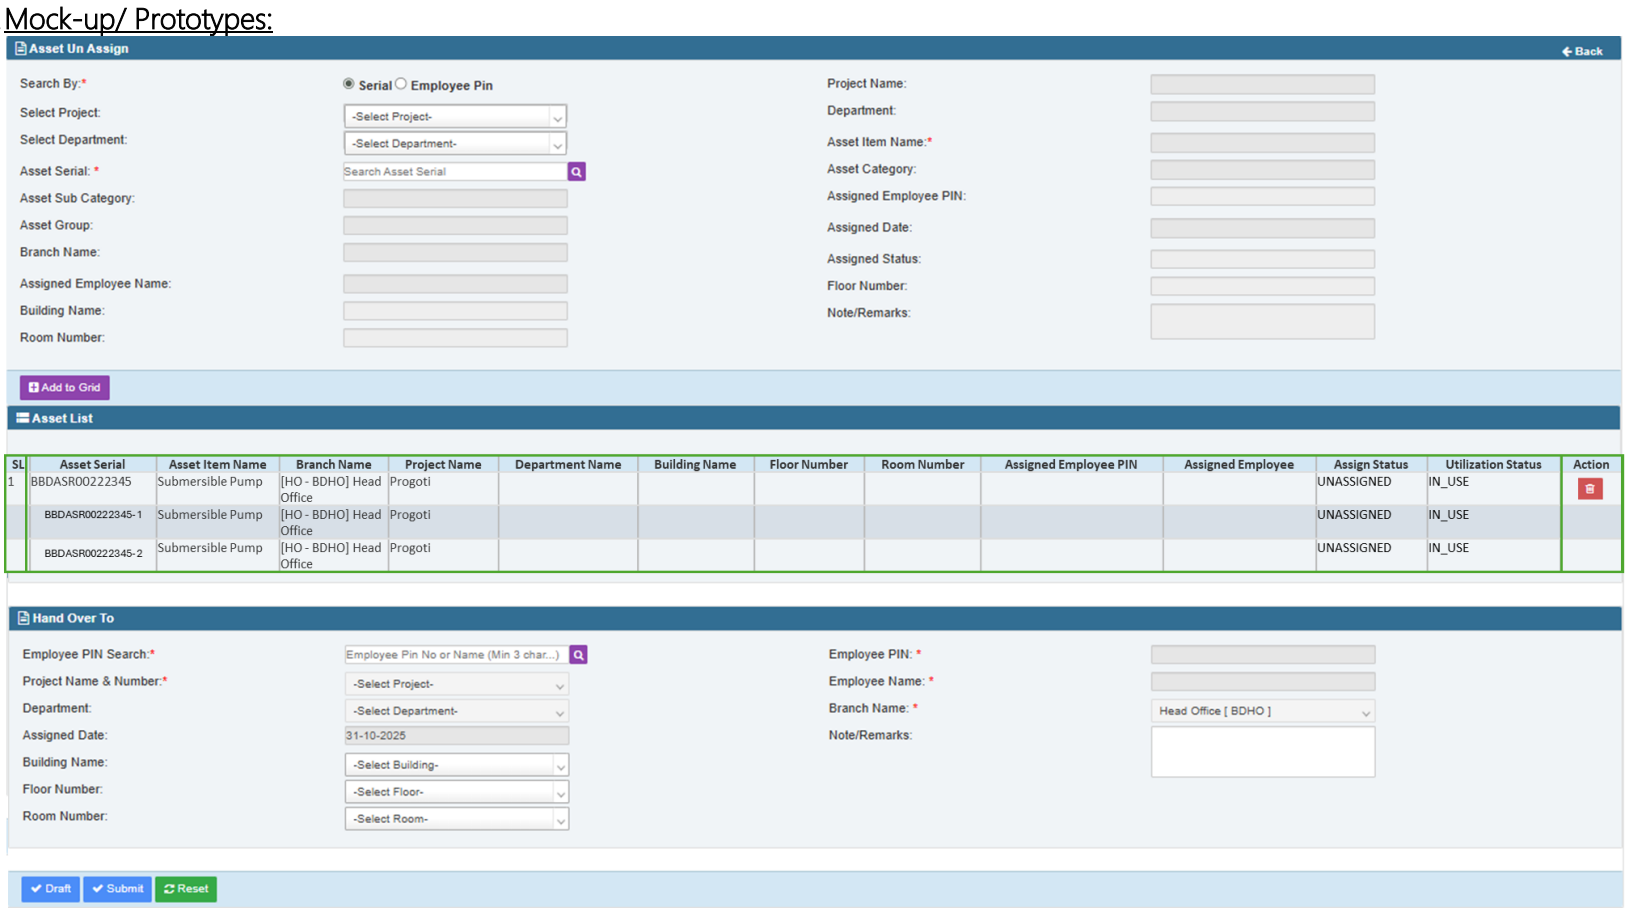


Figure: Asset List for Asset Unassign via asset serial.

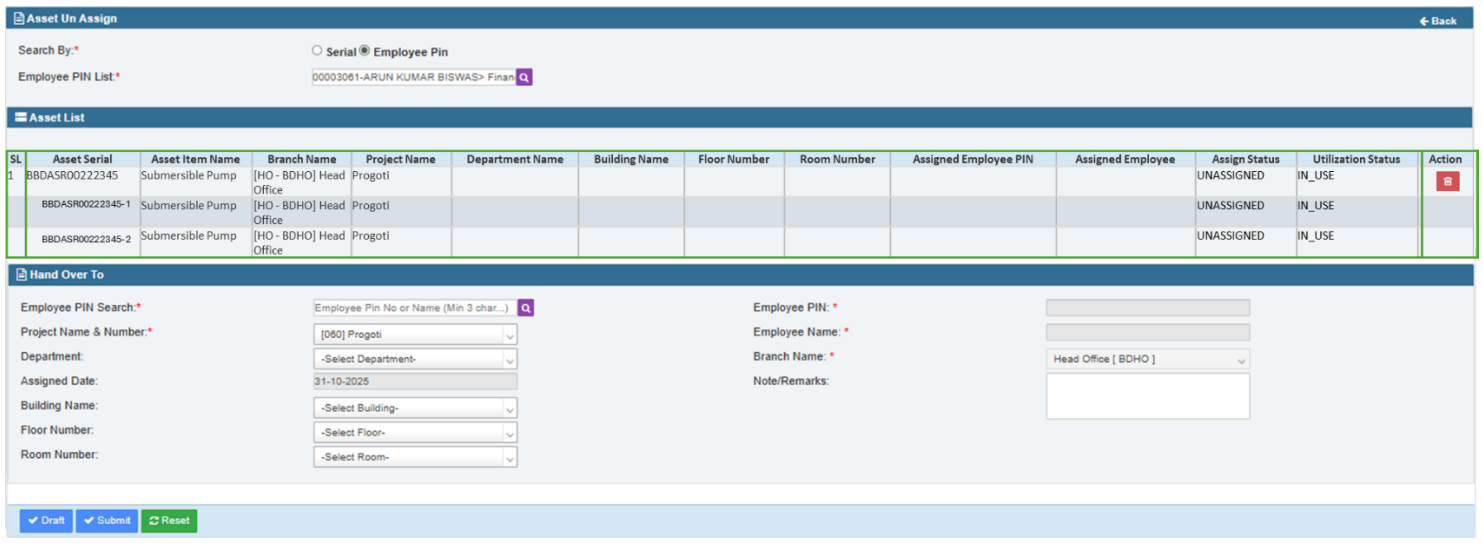


Figure: Figure: Asset List for Asset Unassign via employee PIN.

3.1.8. Requirements:

- Extended/subsidiary assets must not appear as selectable individually without the parent asset for **asset unassign** feature when searched via Asset Serial field.
- If the user enters the asset serial number for a extended/subsidiary asset, system will show a validation message stating the selected asset not found.
- When a parent asset is selected, the system must automatically:
  i. Fetch all associated extended/subsidiary assets and include them in the Asset List of **Asset Unassign** feature.
  ii. For every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button for the extended/subsidiary assets.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  iv. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included asset list.
  v. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.
- Asset List will be impacted in a similar way as mentioned above for the Search By employee PIN option as well.
- Upon submission, the system will behave as per current flow and list the transaction as per approval workflow.

3.1.9. Assumptions:

- N/A

3.1.10. Non-functional Requirements:

- N/A

3.1.11. Acceptance Criteria:

- Extended/subsidiary assets must not appear as selectable individually without the parent asset in the **Asset Unassign** feature when searched via Asset Serial field.
- When a user manually enters a extended/subsidiary asset serial number, the system is displaying a validation message indicating that extended/subsidiary assets cannot be selected for **Asset Unassign**.
- When a parent asset is selected, the system must automatically fetch and include all associated active extended/subsidiary assets to the **Asset List**.
- Auto-included extended/subsidiary assets must appear immediately under the parent asset in the **Asset List** with proper right indentation for visual distinction with no action buttons for the extended/subsidiary assets.
- Users must not be able to deselect or remove any extended/subsidiary asset that is auto-included under a parent asset.
- Removing a parent asset from the assignment grid must automatically remove all associated extended/subsidiary assets from the grid.
- Inactive extended/subsidiary assets must not appear in the **asset list**.
- The system must apply the **Asset Unassign** activity equally to the parent asset and all extended/subsidiary assets in the list.
- The parent asset and its extended/subsidiary assets must appear together in the **Transaction List, Transaction Approval List, and Asset Assign Acknowledgement** as part of the same transaction.

3.1.12. Exceptions:

- Upon **Asset Unassign**, only the currently active and not merged extended/subsidiary assets will be considered for the above-mentioned requirements.

4. Internal Movement | F04 | <Feature JIRA ID>

4.1. New validation will be added on not letting the user select any extended/subsidiary asset | F04S01 | <Story JIRA ID>

4.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for Asset Internal Movement and ensure that when I perform Asset Internal Movement on a parent asset, all associated extended/subsidiary assets automatically move with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

4.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transaction from the top menu bar.
- Select and click on the Asset Internal Movement feature.

4.1.3. Actors:

- Authorized user.

4.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- New Scope:
  i. The user will not be able to select the Extended/subsidiary assets individually.
  ii. Only parent assets will be available for selection.
  iii. When a transaction/operation is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.

4.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

4.1.6. Impacted Areas:

- Asset Internal Movement
- Transaction List
- Transaction Approval List

4.1.7. Mock-up/ Prototypes:

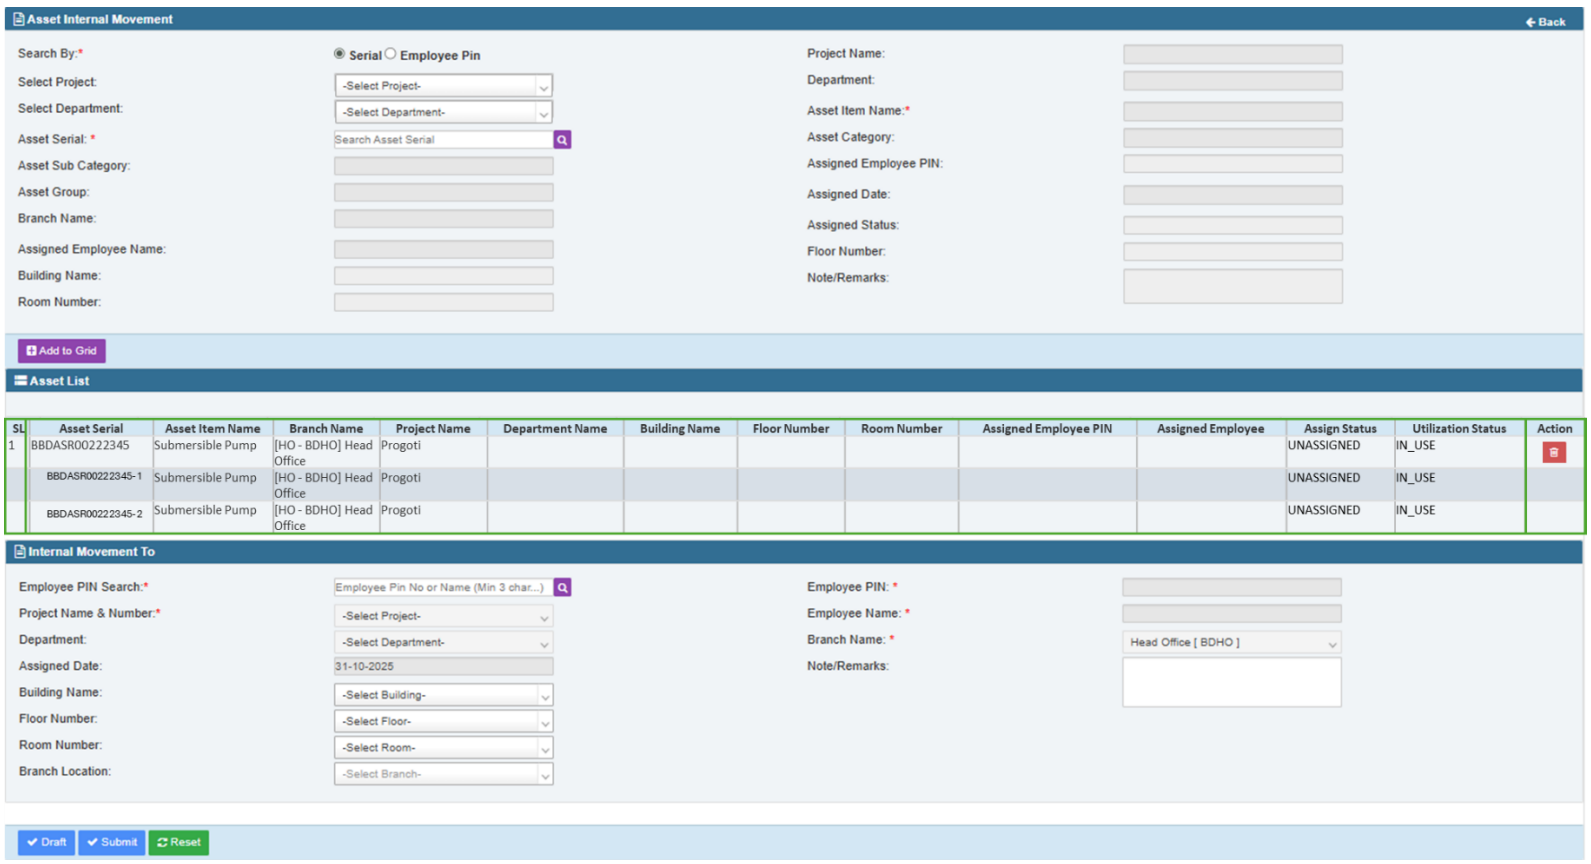


Figure: Asset List for Asset Internal Movement via asset serial.

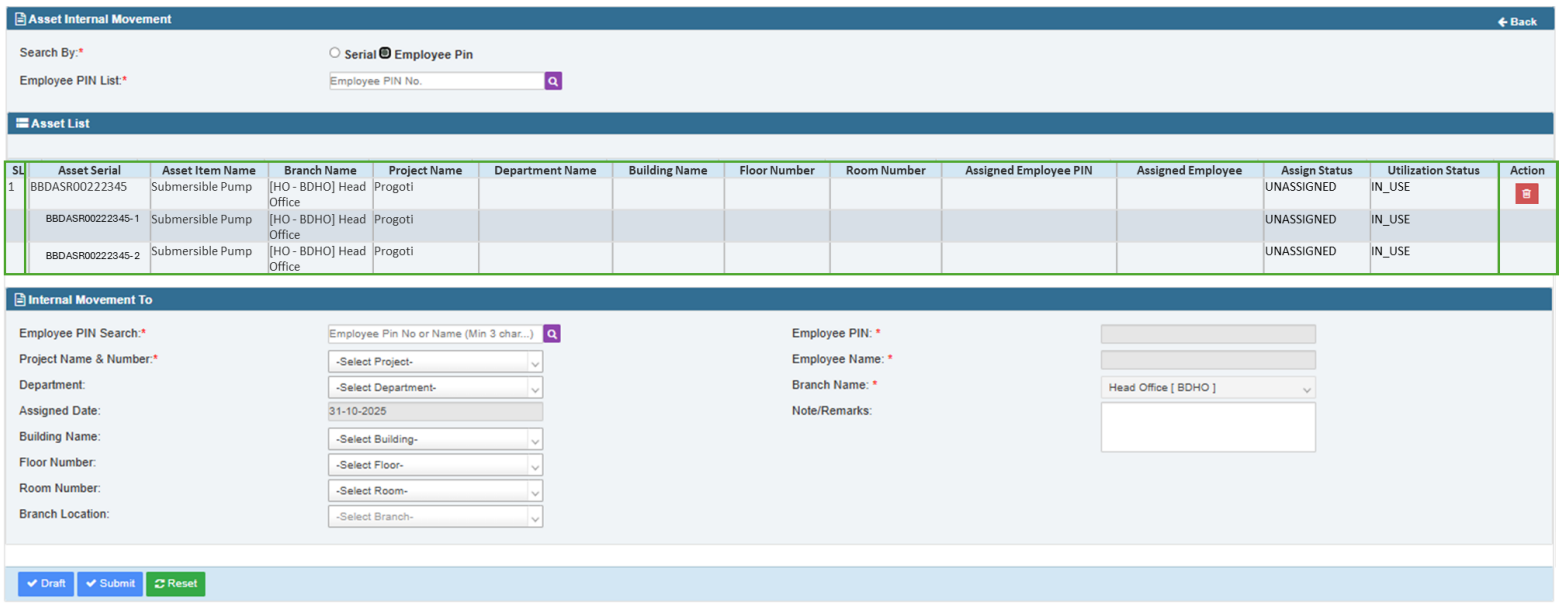


Figure: Figure: Asset List for Asset Internal Movement via employee PIN.

4.1.8. Requirements:

- Extended/subsidiary assets must not appear as selectable individually without the parent asset for **asset internal movement** feature when searched via Asset Serial field.
- If the user enters the asset serial number for a extended/subsidiary asset, system will show a validation message stating the selected asset not found.
- When a parent asset is selected, the system must automatically:
  i. Fetch all associated active extended/subsidiary assets and include them in the Asset List of **Asset Internal Movement** feature.
  ii. For every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button for the extended/subsidiary assets.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  iv. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included asset list.
  v. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.
- Asset List will be impacted in a similar way as mentioned above for the Search By employee PIN option as well.
- Upon submission, the system will behave as per current flow and list the transaction as per approval workflow.

4.1.9. Assumptions:

- N/A

4.1.10. Non-functional Requirements:

- N/A

4.1.11. Acceptance Criteria:

- Extended/subsidiary assets must not appear as selectable individually without the parent asset in the **Asset Internal Movement** feature when searched via Asset Serial field.
- When a user manually enters a extended/subsidiary asset serial number, the system is displaying a validation message indicating that extended/subsidiary assets cannot be selected for **Asset Internal Movement**.
- When a parent asset is selected, the system must automatically fetch and include all associated active extended/subsidiary assets to the **Asset List**.
- Auto-included extended/subsidiary assets must appear immediately under the parent asset in the **Asset List** with right indentation for visual distinction with no action buttons for the extended/subsidiary assets.
- Users must not be able to deselect or remove any extended/subsidiary asset that is auto-included under a parent asset.
- Removing a parent asset from the assignment grid must automatically remove all associated extended/subsidiary assets from the grid.
- Inactive extended/subsidiary assets must not appear in the **asset list**.
- The system must apply the **Asset Internal Movement** activity equally to the parent asset and all extended/subsidiary assets in the list.
- The parent asset and its extended/subsidiary assets must appear together in the **Transaction List and Transaction Approval List,** as part of the same transaction.

4.1.12. Exceptions:

- Upon **Asset Internal Movement**, only the currently active and not merged extended/subsidiary assets will be considered for the above mentioned requirements.

5. Transaction List | F05 | <Feature JIRA ID>

5.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F05S01 | <Story JIRA ID>

5.1.1. User Story:

As an authorized user, I want the system to show the extended/subsidiary assets immediately below their respective parent asset with right indentation in asset serial number and no list serial number for list pages so that I can visually distinguish the extended/subsidiary assets from the parent assets in a list.

5.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transaction from the top menu bar.
- Select and click on the Transaction List feature.
- Click on the Details button from the Transaction List of Asset Assign/Un Assign/Internal Movement data grid.

5.1.3. Actors:

- Authorized user.

5.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no distinctions between them.
- **New Scope:**
  i. In a given list page, where there might be parent asset as well as extended/subsidiary assets, the system will present the extended/subsidiary assets with no list Sl. Number and with the asset serial number being indented towards right side for visual distinction.

5.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

5.1.6. Impacted Areas:

- Asset Transaction Details (Assign/UnAssign/Internal Movement) pop-up window.

5.1.7. Mock-up/ Prototypes:

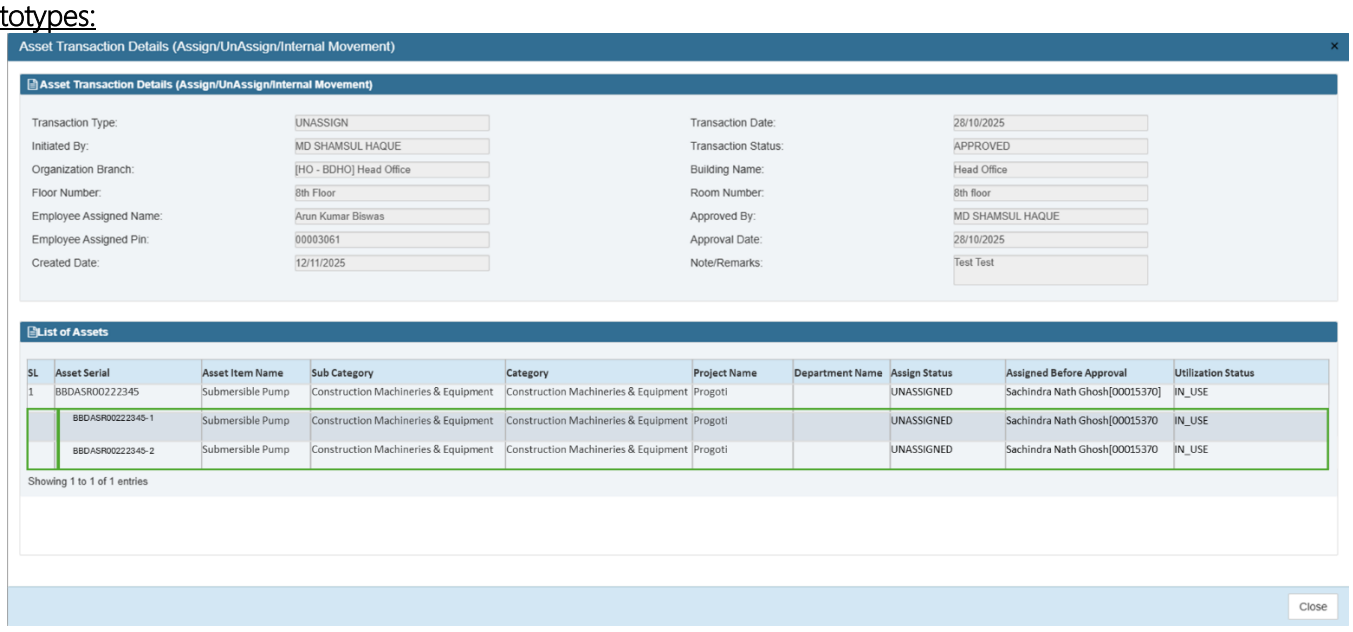


Figure: Asset List for Asset Transaction Details (Assign/UnAssign/Internal Movement) pop-up window.

5.1.8. Requirements:

- When both parent and extended/assets in the list page, the list will show following behavior,
  i. For every parent asset in the list with extended/subsidiary asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset seria.
  ii. Extended/Subsidiary asset will not contain any list SL No.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**

5.1.9. Assumptions:

- N/A

5.1.10. Non-functional Requirements:

- N/A

5.1.11. Acceptance Criteria:

- Extended/subsidiary assets must appear immediately below their respective parent asset in the **Transaction List**.
- Extended/subsidiary assets must not display any List Serial Number (SL No.) in the list view.
- The asset serial number of every extended/subsidiary asset must be visually indented to the right to distinguish it from parent assets.
- Only active extended/subsidiary assets must appear under the parent asset.

5.1.12. Exceptions:

- Only the currently active and not merged extended/subsidiary assets will be listed in list pages.

6. Transaction Approval List | F06 | <Feature JIRA ID>

6.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F06S01 | <Story JIRA ID>

6.1.1. User Story:

As an authorized user, I want the system to show the extended/subsidiary assets immediately below their respective parent asset with right indentation in asset serial number and no list serial number for list pages so that I can visually distinguish the extended/subsidiary assets from the parent assets in a list.

6.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transaction from the top menu bar.
- Select and click on the Transaction Approval List feature.
- Click on the Details button from the Approval List of Transaction (Assign/UnAssign/Internal Movement) data grid.

6.1.3. Actors:

- Authorized user.

6.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no distinctions between them.
- **New Scope:**
  i. In a given list page, where there might be parent asset as well as extended/subsidiary assets, the system will present the extended/subsidiary assets with no list Sl. Number and with the asset serial number being indented towards right side for visual distinction.

6.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

6.1.6. Impacted Areas:

- Asset Transaction Details (Assign/UnAssign/Internal Movement) pop-up window.

6.1.7. Mock-up/ Prototypes:

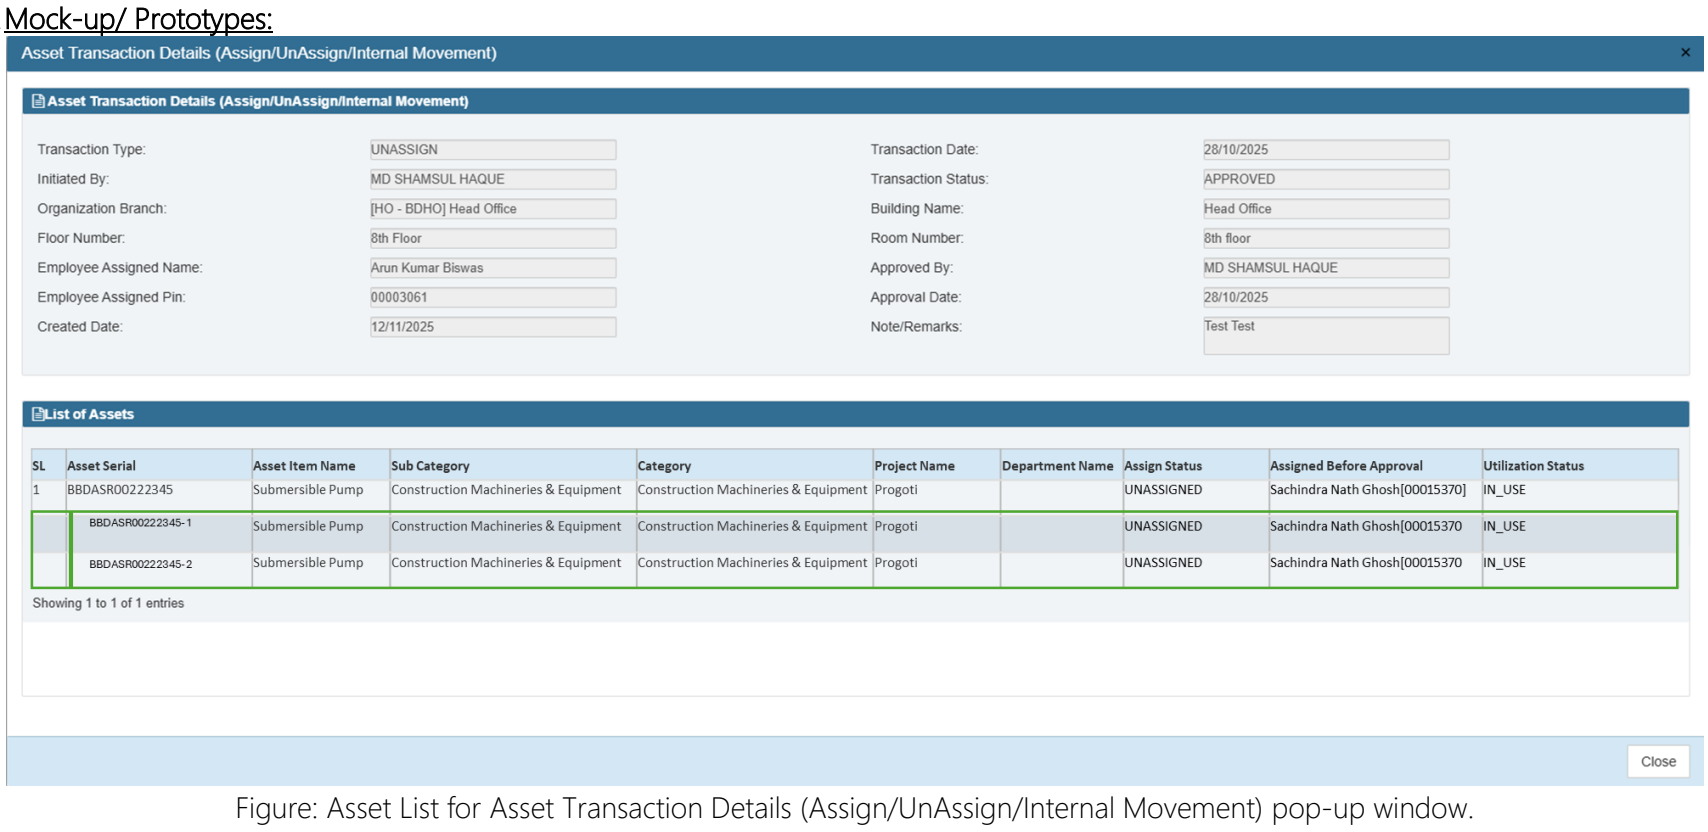


Figure: Asset List for Asset Transaction Details (Assign/UnAssign/Internal Movement) pop-up window.

6.1.8. Requirements:

- When both parent and extended/assets in the list page, the list will show following behavior,
  i. For every parent asset in the list with extended/subsidiary asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/Subsidiary asset will not contain any list SL No.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**

6.1.9. Assumptions:

- N/A

6.1.10. Non-functional Requirements:

- N/A

6.1.11. Acceptance Criteria:

- Extended/subsidiary assets must appear immediately below their respective parent asset in the **Transaction Approval List**.
- Extended/subsidiary assets must not display any List Serial Number (SL No.) in the list view.
- The asset serial number of every extended/subsidiary asset must be visually indented to the right to distinguish it from parent assets.
- Only active extended/subsidiary assets must appear under the parent asset.

6.1.12. Exceptions:

- Only the currently active and not merged extended/subsidiary assets will be listed in list pages.

7. Asset Assign Acknowledgement | F07 | <Feature JIRA ID>

7.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F07S01 | <Story JIRA ID>

7.1.1. User Story:

As an authorized user, I want the system to show the extended/subsidiary assets immediately below their respective parent asset with right indentation in asset serial number and no list serial number for list pages so that I can visually distinguish the extended/subsidiary assets from the parent assets in a list.

7.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transaction from the top menu bar.
- Select and click on the Asset Assign acknowledgement feature.
- Click on the Details button from the Details column of the Pending Asset Acknowledgement data grid.

7.1.3. Actors:

- Authorized user.

7.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no distinctions between them.
- **New Scope:**
  i. In a given list page, where there might be parent assets as well as extended/subsidiary assets, the system will present the extended/subsidiary assets with no list serial number (SL.) and with the asset serial number being indented towards right side for visual distinction.

7.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

7.1.6. Impacted Areas:

- Asset Transaction Details (Assign/UnAssign/Internal Movement) pop-up window.

7.1.7. Mock-up/ Prototypes:

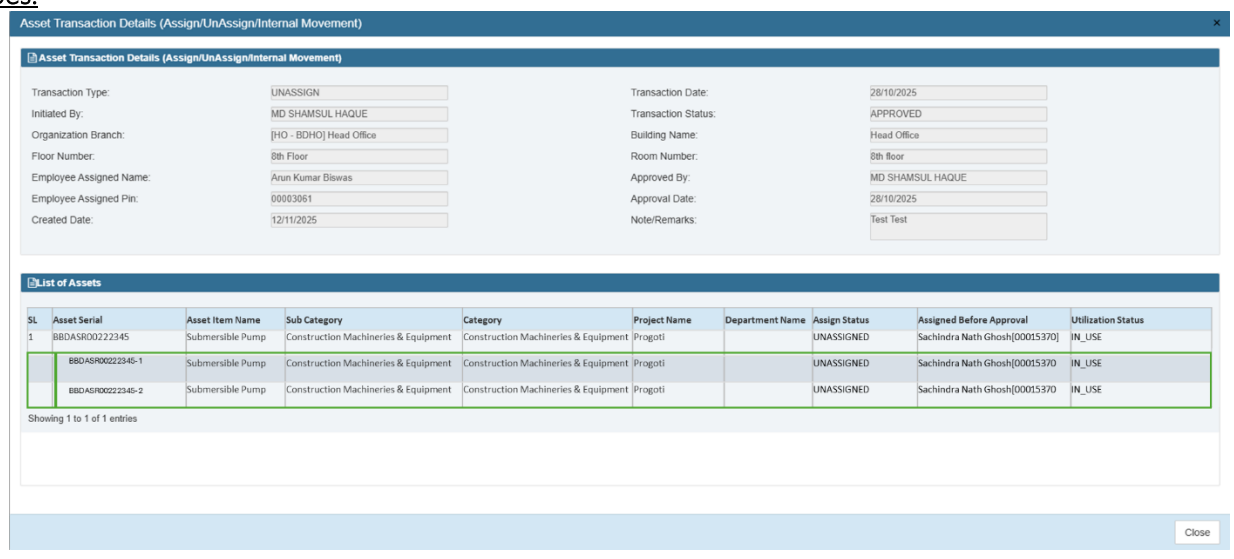


Figure: Asset List for Asset Transaction Details (Assign/UnAssign/Internal Movement) pop-up window.

7.1.8. Requirements:

- When both parent and extended/assets in the list page, the list will show following behavior,
  i. For every parent asset in the list with extended/subsidiary asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/Subsidiary asset will not contain any list serial number (SL.).
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**

7.1.9. Assumptions:

- N/A

7.1.10. Non-functional Requirements:

- N/A

7.1.11. Acceptance Criteria:

- Extended/subsidiary assets must appear immediately below their respective parent asset in the **Asset Transaction Details (Assign/UnAssign/Internal Movement)** pop-up window of **Asset Assign Acknowledgement** feature.
- Extended/subsidiary assets must not display any List Serial Number (SL No.) in the list view.
- The asset serial number of every extended/subsidiary asset must be visually indented to the right to distinguish it from parent assets.
- Only active extended/subsidiary assets appear under the parent asset.

7.1.12. Exceptions:

- Only the currently active and not merged extended/subsidiary assets will be listed in list pages.

8. Asset Shipment | F08 | <Feature JIRA ID>

8.1. New validation will be added on not letting the user select any extended/subsidiary asset | F08S01 | <Story JIRA ID>

8.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Shipment Challan** and ensure that when I perform **Asset Transfer via Shipment** on a parent asset, all associated extended/subsidiary assets automatically **be transferred** to the destination project/branch with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

8.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transfer from the top menu bar.
- Select and click on the Asset Shipment feature.
- Click on the shipment number hyperlinked.
- Select the Add Serial Tab for directly adding the asset serial or select the Transfer Challan tab to access a particular challan and then click on the Add Serial button to open Add Asset Serial pop-up window.

8.1.3. Actors:

- Authorized user.

8.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  i. The user will not be able to select the Extended/subsidiary assets.
  ii. Only parent assets will be available for selection.
  iii. When a transfer is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.
  iv. During any shipment transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

8.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

8.1.6. Impacted Areas:

- Asset Shipment
- Asset Shipment Challan Approval List
- Asset Shipment In Challan

8.1.7. Mock-up/ Prototypes:

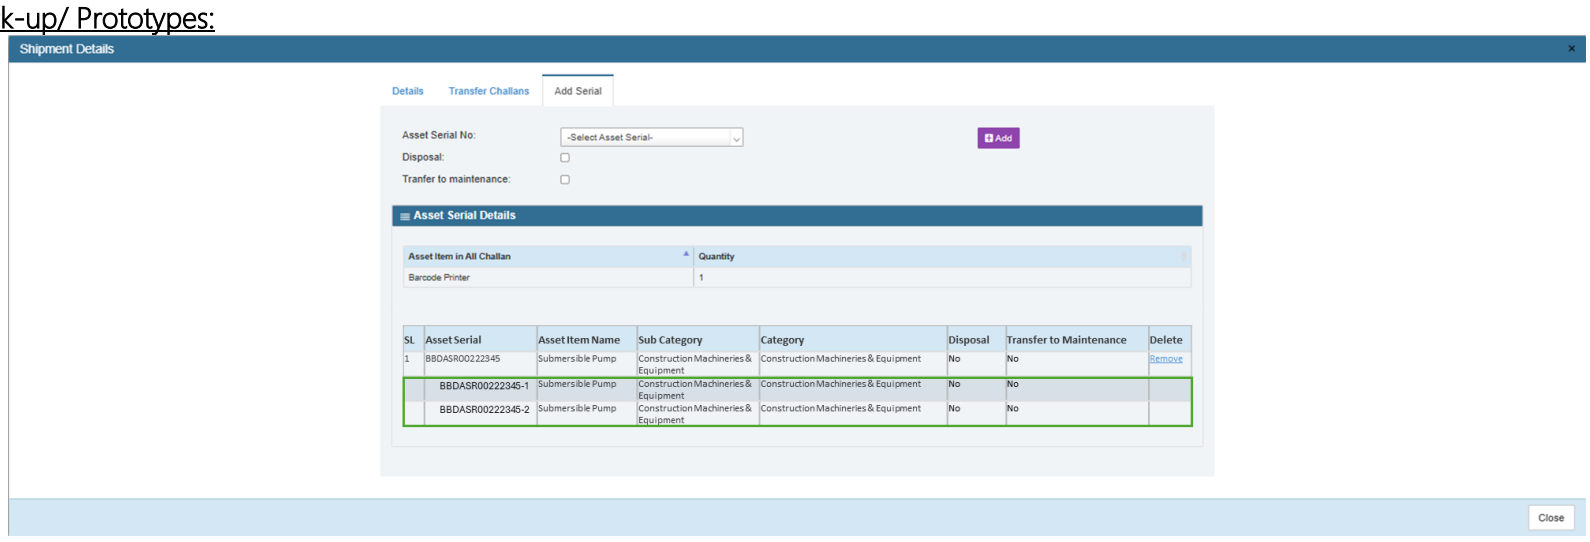


Figure: Changes in Add Serial tab under Shipment Details pop-up window.

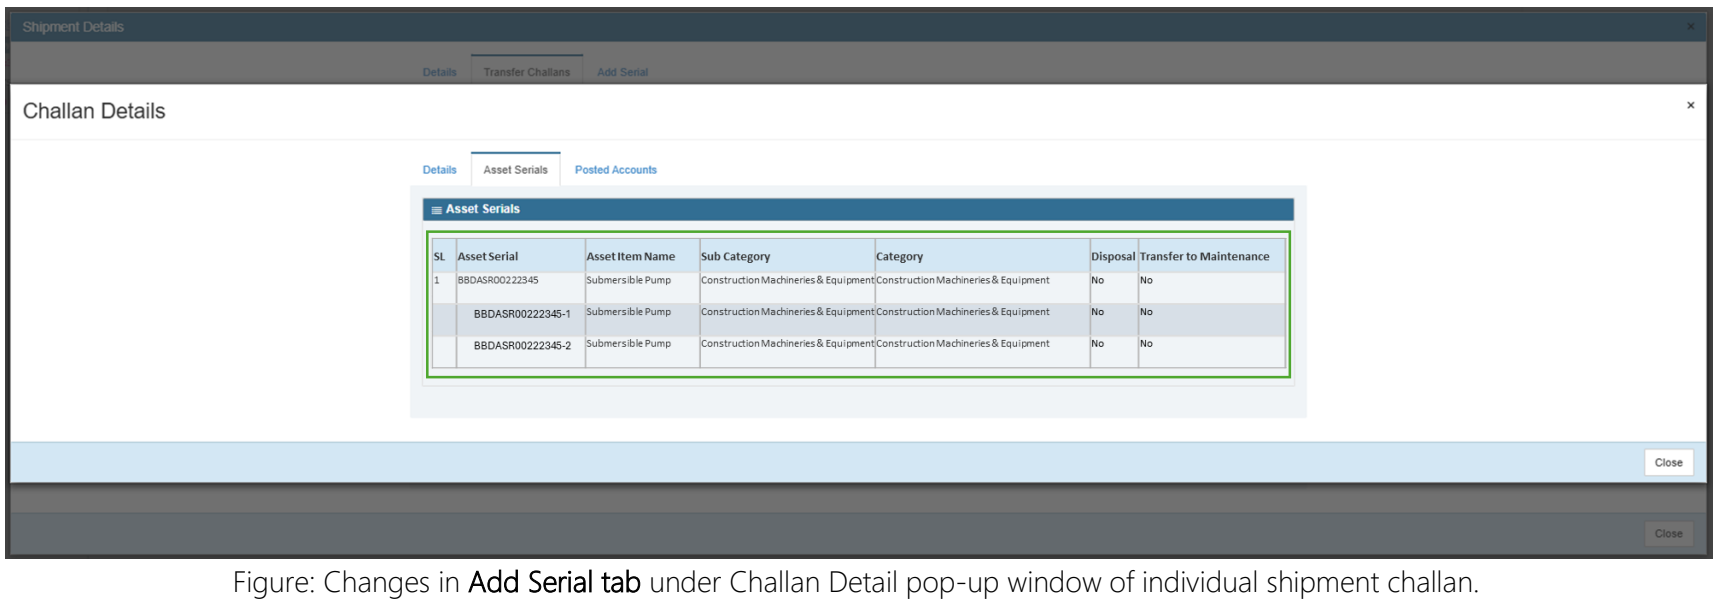


Figure: Changes in **Add Serial tab** under Challan Detail pop-up window of individual shipment challan.

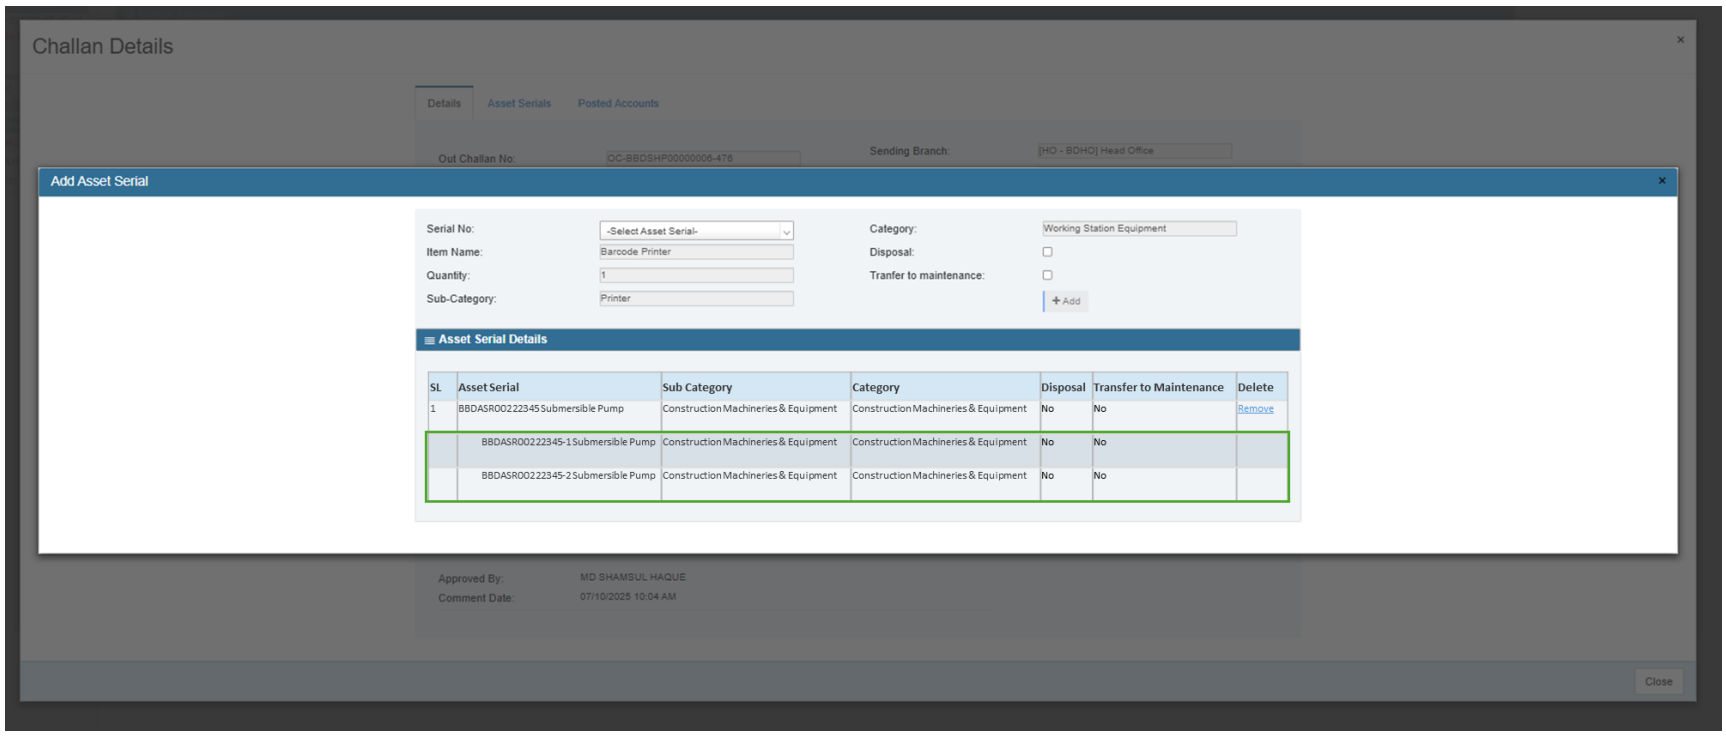


Figure: Changes in **Add Asset Serial pop-up window** under Challan Detail pop-up window of individual shipment challan.

8.1.8. **Requirements:**

- For the **Add Serial tab** in the Shipment Details of the Asset Shipment feature,
  - i. Asset Serial No. drop-down field will only list the Parent Assets.
  - ii. No extended/subsidiary asset should be shown in the drop-down values of the Asset Serial No. field.
  - iii. When a user selects a parent asset with extended/subsidiary assets via Add button, the system will record and show the quantity for the parent asset only and will fetch all associated extended/subsidiary assets and include them in the asset serial list data grid below the Asset Serial Details section.
  - iv. In the Asset Serial List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - v. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  - vi. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  - vii. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included list.
  - viii. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.
- For the **Add Serial tab** (*Asset Shipment feature> Shipment No. (hyperlinked)> Transfer Challans tab> Out Challan No.> Add Serial*),
  - i. In the Asset Serial data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  - iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
- For the **Add Asset Serial pop-up window** (*Asset Shipment feature> Shipment No. (hyperlinked)> Transfer Challans tab> Out Challan No.> Add Serial button from Item Details Data grid*),
  - i. Serial No. drop-down field will only list the Parent Assets.
  - ii. No extended/subsidiary asset should be shown in the drop-down values of the Serial No. field.
  - iii. When a user selects a parent asset with extended/subsidiary assets via Add button, the system will fetch all associated extended/subsidiary assets and include them in the asset serial list data grid below the Asset Serial Details section.
  - iv. In the Asset Serial List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - v. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  - vi. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  - vii. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included list.
  - viii. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.
- Fixed asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.
- During a new extended asset addition, when it is already acknowledged in HOFA but pending approval in HOFIN the parent asset (with/without extended asset) will be restricted from transactions like Transfer/Shipment/Write-off/Sale in fixed asset module.
- During a new extended asset addition, when acknowledgement is pending in HOFA then the parent asset (with/without extended asset) will be restricted for transactions like Transfer/Shipment/Write-off/Sale in fixed asset module

8.1.9. **Assumptions:**

- N/A

8.1.10. Non-functional Requirements:

- N/A

8.1.11. Acceptance Criteria:

- Extended/subsidiary assets must not appear as selectable in the Asset Serial No. or Serial No. dropdown fields in both the **Add Serial tab** and **Add Asset Serial pop-up window**.
- When a user manually enters or attempts to select a extended/subsidiary asset, the system must prevent the selection and allow only valid parent assets to be added.
- When a parent asset is added through the Add button, the system must automatically fetch all associated extended/subsidiary assets and include them in the Asset Serial List data grid.
- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.
- No action button (remove/delete) must be available for the auto-included extended/subsidiary assets in any grid or pop-up window.
- Users must not be able to deselect or remove extended/subsidiary assets at any stage of the shipment process.
- Removing or deleting a parent asset from the list/grid must automatically remove its associated extended/subsidiary assets as well.
- The system must correctly transfer both the parent asset and all auto-included active extended/subsidiary assets to the destination project/branch as part of the same shipment/shipment challan transaction.
- The system must maintain the parent–extended grouping structure throughout the shipment workflow, including the Shipment Details pop-up windows and Shipment Challans.

8.1.12. Exceptions:

- On **Asset Shipment**, only the currently active and not merged extended/subsidiary assets will be considered for the above-mentioned requirements.

9. Asset Shipment Challan Approval List | F09 | <Feature JIRA ID>

9.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F09S01 | <Story JIRA ID>

9.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

9.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transfer from the top menu bar.
- Select and click on the Asset Shipment Approval List feature.
- Click on the shipment number hyperlinked.
- Click on the Show Serial button to open Show Asset Serial pop-up window.

9.1.3. Actors:

- Authorized user.

9.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

9.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

9.1.6. Impacted Areas:

- N/A

9.1.7. Mock-up/ Prototypes:

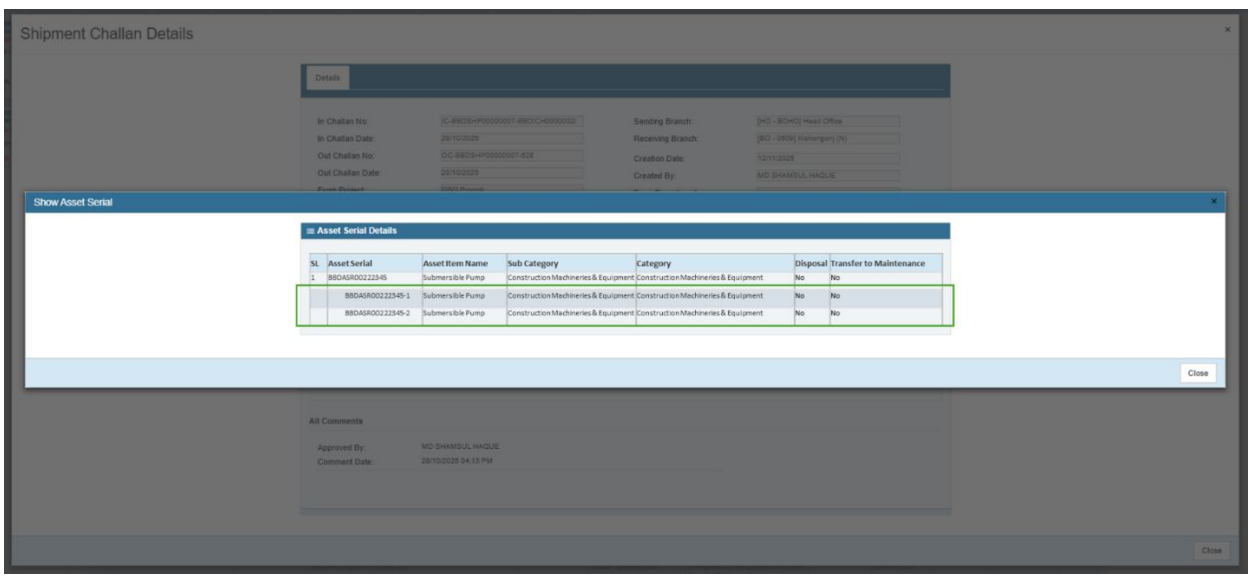


Figure: Changes in Show Asset Serial pop-up window under Shipment Challan Detail pop-up window.

9.1.8. Requirements:

- For the Show Asset Serial pop-up window under Shipment Challan Details pop-up window,
  i. In the Asset Serial Details data grid, for every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
- Fixed asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

9.1.9. Assumptions:

- N/A

9.1.10. Non-functional Requirements:

- N/A

9.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

9.1.12. Exceptions:

- Upon Asset Shipment, only the currently active and not merged extended/subsidiary assets will be considered for the above-mentioned requirements.

10. Asset Shipment In-Challan | F10 | <Feature JIRA ID>

10.1. New validation will be added on not letting the user select any extended/subsidiary asset and | F10S01 | <Story JIRA ID>

10.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Shipment In-Challan** and ensure that when I receive a parent asset via **Asset Shipment Transfer**, all associated extended/subsidiary assets automatically **be received** to the destination project/branch with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

10.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Transfer from the top menu bar.
- Select and click on the Asset Shipment In-Challan feature.
- Click on the shipment number hyperlinked.
- Click on the Show Serial button to open Add Asset Serial pop-up window.

10.1.3. Actors:

- Authorized user.

10.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  i. The user will not be able to select the Extended/subsidiary assets.
  ii. Only parent assets will be available for selection.
  iii. When a transfer receive is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.
  iv. During any shipment, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

10.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

10.1.6. Impacted Areas:

- Asset Serial Global List

10.1.7. Mock-up/ Prototypes:

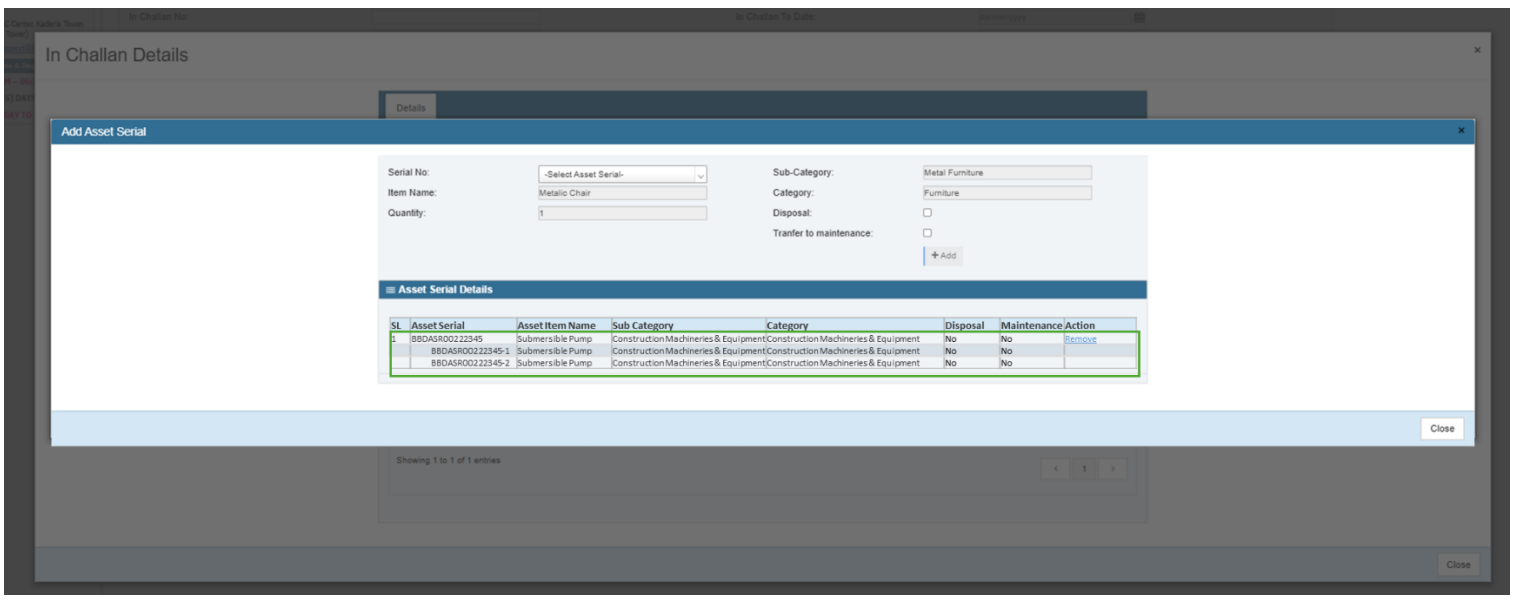


Figure: Changes in **Add Asset Serial pop-up window** under In Challan Detail pop-up window.

10.1.8. Requirements:

- For the **Add Asset Serial** pop-up window under the In Challan Details pop-up window,
  i. Serial No. drop-down field will only list the Parent Assets.
  ii. No extended/subsidiary asset should be shown in the drop-down values of the Serial No. field.
  iii. When a user selects a parent asset with extended/subsidiary assets via Add button, the system will fetch all associated extended/subsidiary assets and include them in the asset serial list data grid below the Asset Serial Details section.
  iv. In the Asset Serial List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  v. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  vi. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  vii. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included list.
  viii. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.
- Upon successful acknowledgement of the shipment in-challan that contains parent and extended/subsidiary assets in it, the extended/subsidiary asset(s) will also be listed in the asset serial global list of the destined project/branch and will contain all the

behavior and validations related to the extended/subsidiary assets while being tagged with the parent asset in the destined project/branch.

- Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.
- During a new extended asset addition, when it is already acknowledged in HOFA but pending approval in HOFIN the parent asset (with/without extended asset) will be restricted from transactions like Transfer/Shipment/Write-off/Sale in fixed asset module.
- During a new extended asset addition, when acknowledgement is pending in HOFA then the parent asset (with/without extended asset) will be restricted for transactions like Transfer/Shipment/Write-off/Sale in fixed asset module

10.1.9. Assumptions:

- N/A

10.1.10. Non-functional Requirements:

- N/A

10.1.11. Acceptance Criteria:

- Extended/subsidiary assets must not appear as selectable in the Serial No. dropdown field in the Add Asset Serial pop-up window.
- When a user manually enters or attempts to select a extended/subsidiary asset, the system must prevent the selection and allow only valid parent assets to be added.
- When a parent asset is added through the Add button, the system must automatically fetch all associated extended/subsidiary assets and include them in the Asset Serial List data grid.
- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.
- No action button (remove/delete) must be available for the auto-included extended/subsidiary assets in any grid or pop-up window.
- Users must not be able to deselect or remove extended/subsidiary assets at any stage of the shipment process.
- Removing or deleting a parent asset from the list/grid must automatically remove its associated extended/subsidiary assets as well.
- The system must correctly transfer both the parent asset and all auto-included active extended/subsidiary assets to the destination project/branch as part of the same shipment/shipment challan transaction.
- The system must maintain the parent–extended grouping structure throughout the shipment workflow, including the Shipment Details pop-up windows and Shipment Challans.

10.1.12. Exceptions:

- N/A

11. Asset Single Out Challan | F11 | <Feature JIRA ID>

11.1. New validation will be added on not letting the user select any extended/subsidiary asset | F11S01 | <Story JIRA ID>

11.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Single Out Challan** and ensure that when I perform **Asset Transfer via Single Out Challan** on a parent asset, all associated extended/subsidiary assets automatically **be transferred** to the destination project/branch with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

11.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Single Challan from the top menu bar.
- Select and click on the Asset Single Out Challan feature.
- Click on the out-challan number hyperlinked.
- Click on the Add Serial/Show Serial button to open Add Asset Serial pop-up window.

11.1.3. Actors:

- Authorized user.

11.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary relationship that exists in the system hence there is no such validation on extended/subsidiary assets not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  i. The user will not be able to select the Extended/subsidiary assets.
  ii. Only parent assets will be available for selection.
  iii. When a transfer is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.
  iv. Extended/Subsidiary assets will be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  v. During any challan, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

11.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

11.1.6. Impacted Areas:

- Asset Single Out Challan
- Asset Single Out Challan Approval List
- Asset Single In Challan
- Asset Receivables List
- Asset Returnable List

11.1.7. Mock-up/ Prototypes:

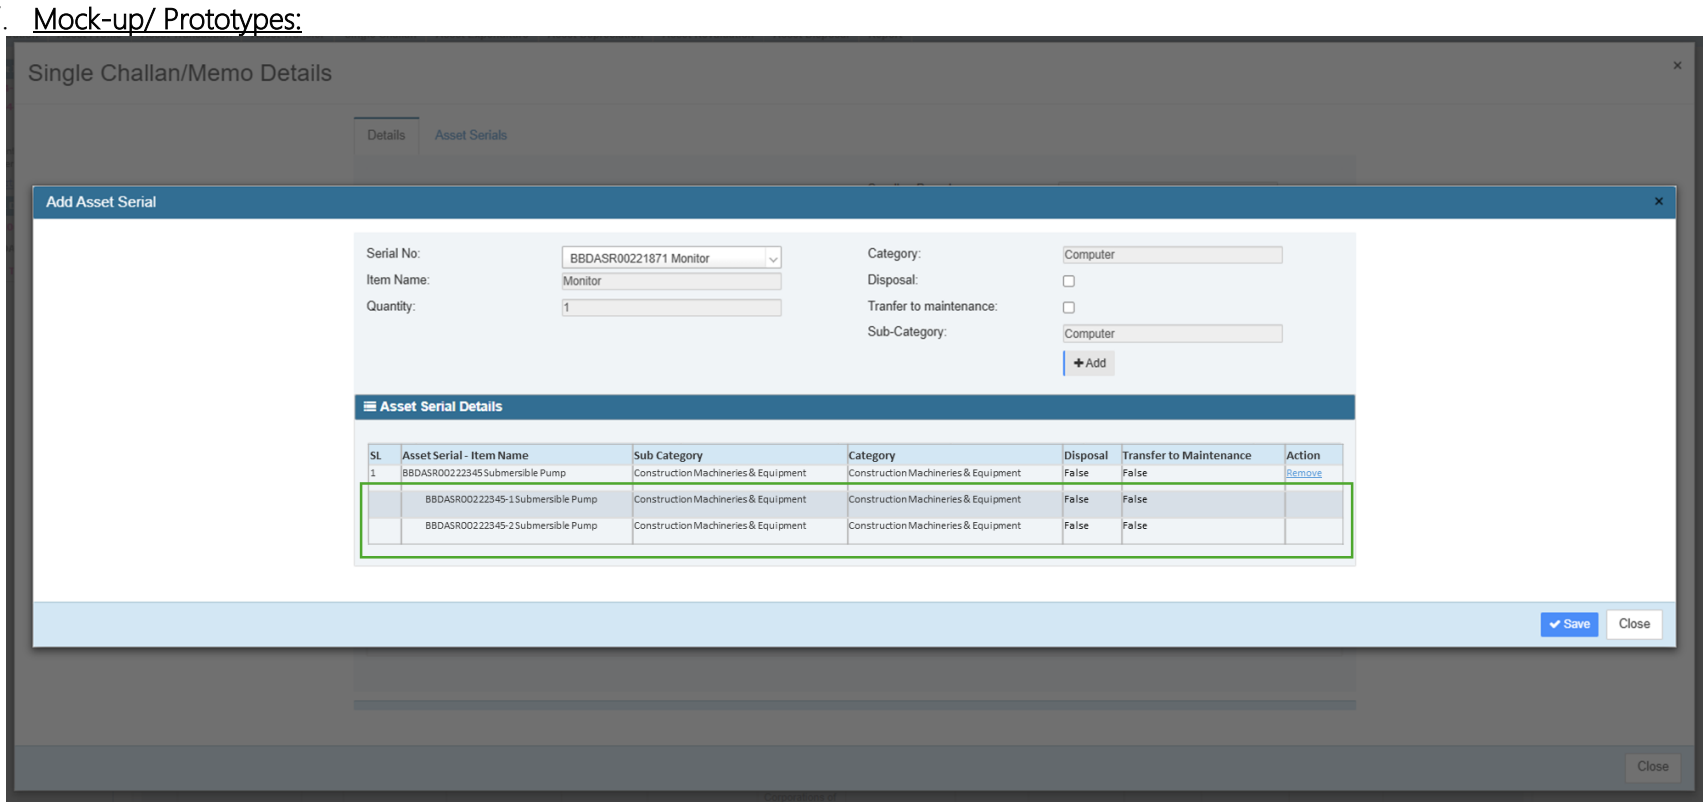


Figure: Changes in **Add Asset Serial pop-up window** under Single Challan/Memo Detail pop-up window via **Add Serial button**.

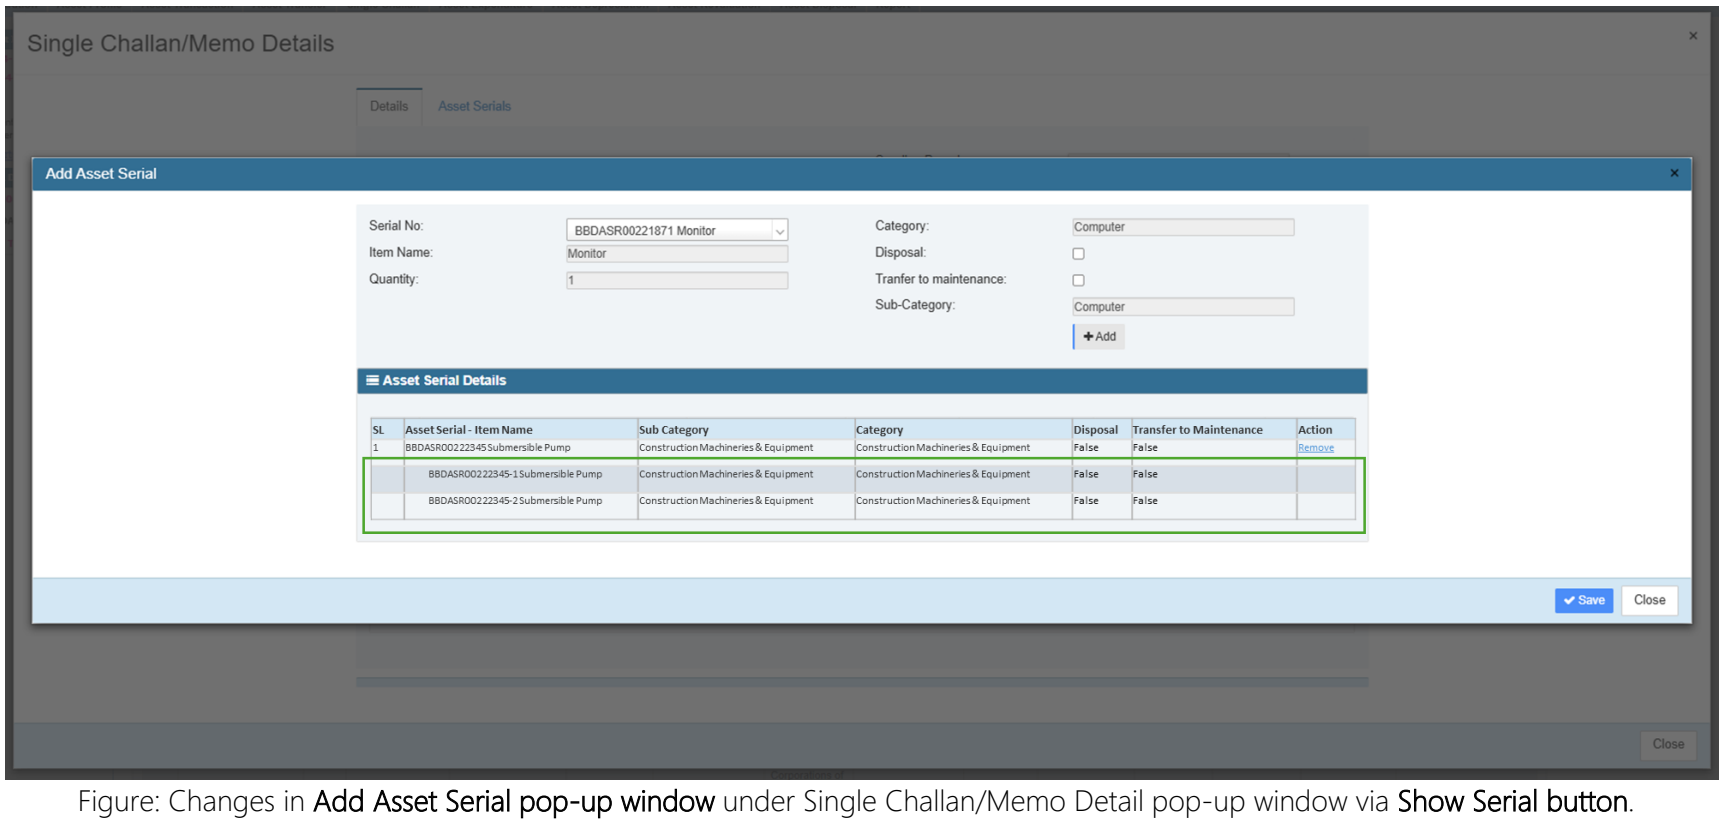


Figure: Changes in **Add Asset Serial pop-up window** under Single Challan/Memo Detail pop-up window via **Show Serial button**.



Figure: Changes in **Add Serial tab** under Single Challan/Memo Detail pop-up window.

11.1.8. <u>Requirements:</u>

- For the **Add Asset Serial pop-up window** under Single Challan/Memo Detail pop-up window via **Add Serial button**,
  - i. Asset Serial No. drop-down field will only list the Parent Assets.
  - ii. No extended/subsidiary asset should be shown in the drop-down values of the Asset Serial No. field.
  - iii. When a user selects a parent asset with extended/subsidiary assets via Add button, the system will fetch all associated extended/subsidiary assets and include them in the asset serial list data grid in the Asset Serial Details section.
  - iv. In the Asset Serial List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - v. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  - vi. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  - vii. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included list.
  - viii. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.
- For the **Add Asset Serial pop-up window** under Single Challan/Memo Detail pop-up window via **Show Serial button,**
  - i. In the Asset Serial data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  - iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
- For the **Add Serial tab** under Single Challan/Memo Detail pop-up window,
  - i. In the Asset Serial data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  - iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
- Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.

- During a new extended asset addition, when it is already acknowledged in HOFA but pending approval in HOFIN the parent asset (with/without extended asset) will be restricted from transactions like Transfer/Shipment/Write-off/Sale in fixed asset module.
- During a new extended asset addition, when acknowledgement is pending in HOFA then the parent asset (with/without extended asset) will be restricted for transactions like Transfer/Shipment/Write-off/Sale in fixed asset module

11.1.9. Assumptions:

- N/A

11.1.10. Non-functional Requirements:

- N/A

11.1.11. Acceptance Criteria:

- Extended/subsidiary assets must not appear as selectable in the Asset Single Out Challan feature.
- When a user manually enters or attempts to select a extended/subsidiary asset, the system must prevent the selection and allow only valid parent assets to be added.
- When a parent asset is added through the Add button, the system must automatically fetch all associated extended/subsidiary assets and include them in the Asset Serial List data grid.
- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.
- No action button (remove/delete) must be available for the auto-included extended/subsidiary assets in any grid or pop-up window.
- Users must not be able to deselect or remove extended/subsidiary assets at any stage of the shipment process.
- Removing or deleting a parent asset from the list/grid must automatically remove its associated extended/subsidiary assets as well.
- The system must correctly transfer both the parent asset and all auto-included active extended/subsidiary assets to the destination project/branch as part of the same challan.

11.1.12. Exceptions:

- N/A

12. Asset Single Out Challan Approval List | F12 | <Feature JIRA ID>

12.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F12S01 | <Story JIRA ID>

12.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

12.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Single Challan from the top menu bar.
- Select and click on the Asset Single Out Challan Approval List feature.
- Click on the Single Out Challan number hyperlinked.
- Click on the Show Serial button to open Add Asset Serial pop-up window.

12.1.3. Actors:

- Authorized user.

12.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

12.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

12.1.6. Impacted Areas:

- N/A

12.1.7. Mock-up/ Prototypes:

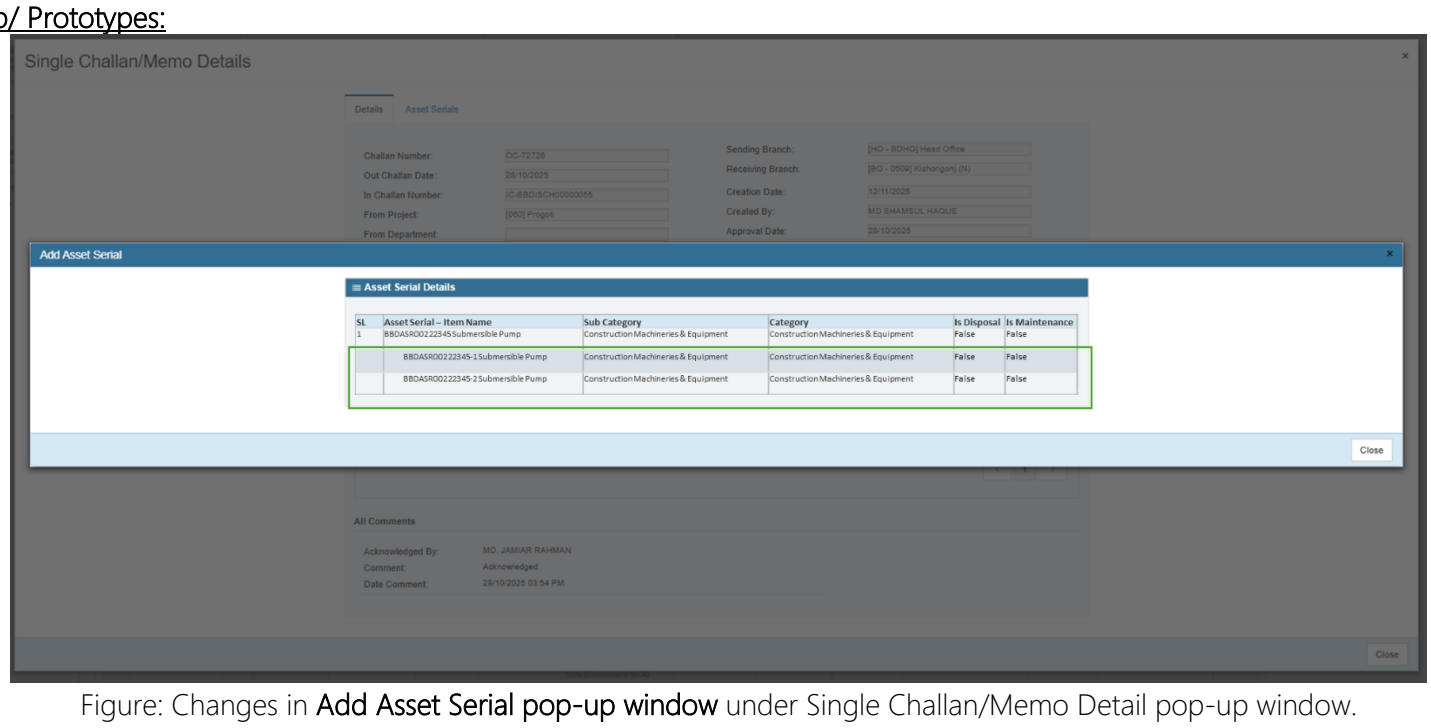


Figure: Changes in **Add Asset Serial pop-up window** under Single Challan/Memo Detail pop-up window.

12.1.8. Requirements:

- For the **Add Asset Serial pop-up window** under Shipment Challan Details pop-up window,
  i. In the Asset Serial Details data grid, for every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
- Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

12.1.9. Assumptions:

- N/A

12.1.10. Non-functional Requirements:

- N/A

12.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

12.1.12. Exceptions:

- N/A

13. Asset Single In-Challan | F13 | <Feature JIRA ID>

13.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F13S01 | <Story JIRA ID>

13.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

13.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Single Challan from the top menu bar.
- Select and click on the Asset Single In-Challan feature.
- Click on the Single Out Challan number hyperlinked.
- Click on the Show Serial button to open Add Asset Serial pop-up window.

13.1.3. Actors:

- Authorized user.

13.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.
  ii. During any challan transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

13.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

13.1.6. Impacted Areas:

- N/A

13.1.7. Mock-up/ Prototypes:

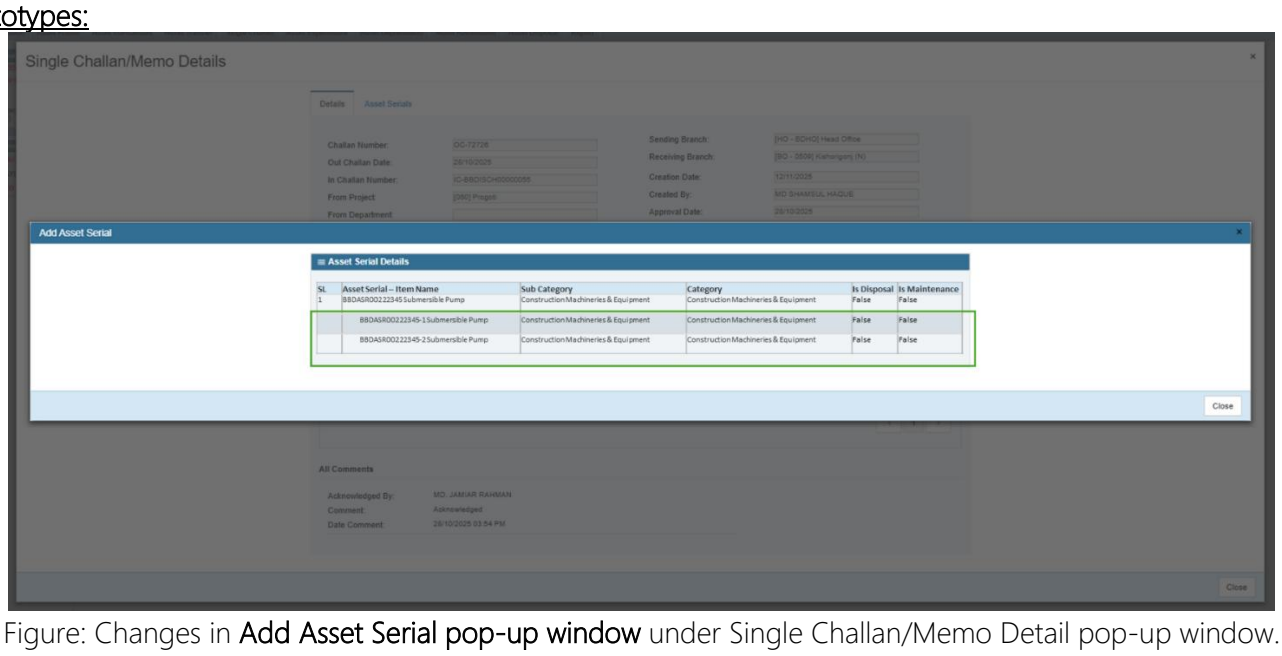


Figure: Changes in **Add Asset Serial pop-up window** under Single Challan/Memo Detail pop-up window.

13.1.8. Requirements:

- For the **Add Asset Serial pop-up window** under Shipment Challan Details pop-up window,
  i. In the Asset Serial Details data grid, for every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
- During challan transaction, Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.
- During a new extended asset addition, when it is already acknowledged in HOFA but pending approval in HOFIN the parent asset (with/without extended asset) will be restricted from transactions like Transfer/Shipment/Write-off/Sale in fixed asset module.
- During a new extended asset addition, when acknowledgement is pending in HOFA then the parent asset (with/without extended asset) will be restricted for transactions like Transfer/Shipment/Write-off/Sale in fixed asset module

13.1.9. Assumptions:

- N/A

13.1.10. Non-functional Requirements:

- N/A

13.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

13.1.12. Exceptions:

- N/A

14. Asset Receivable List | F14 | <Feature JIRA ID>

14.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F14S01 | <Story JIRA ID>

14.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

14.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Single Challan from the top menu bar.
- Select and click on the Asset Receivables List feature.

14.1.3. Actors:

- Authorized user.

14.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

14.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

14.1.6. Impacted Areas:

- N/A

14.1.7. Mock-up/ Prototypes:

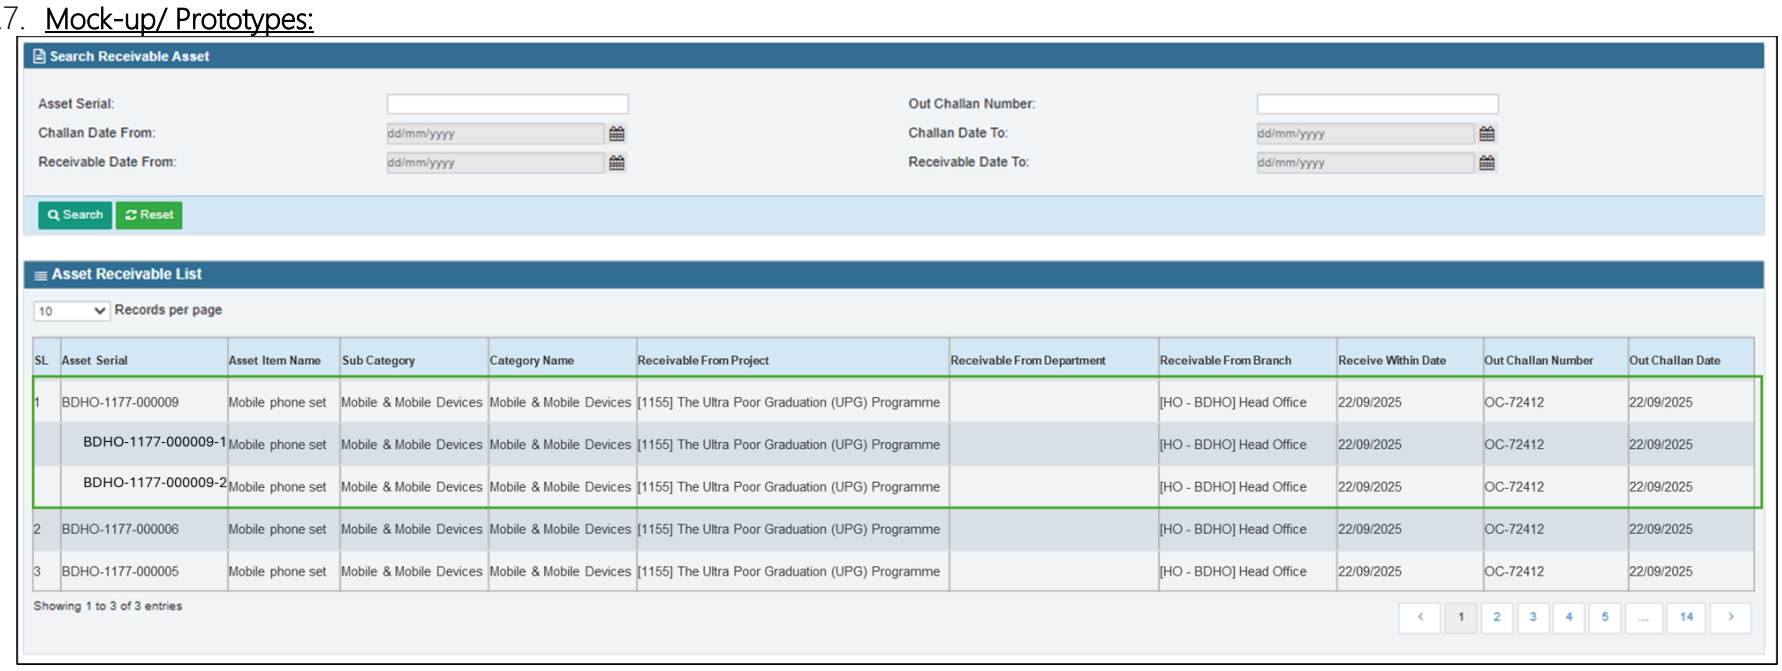


Figure: Changes in Asset Receivables List.

14.1.8. Requirements:

- For the **Add Asset Receivables List data grid**,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**

14.1.9. Assumptions:

- N/A

14.1.10. Non-functional Requirements:

- N/A

14.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

14.1.12. Exceptions:

- N/A

15. Asset Returnable List | F15 | <Feature JIRA ID>

15.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F15S01 | <Story JIRA ID>

15.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

15.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Single Challan from the top menu bar.
- Select and click on the Asset Returnable List feature.

15.1.3. Actors:

- Authorized user.

15.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

15.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

15.1.6. Impacted Areas:

- N/A

15.1.7. Mock-up/ Prototypes:

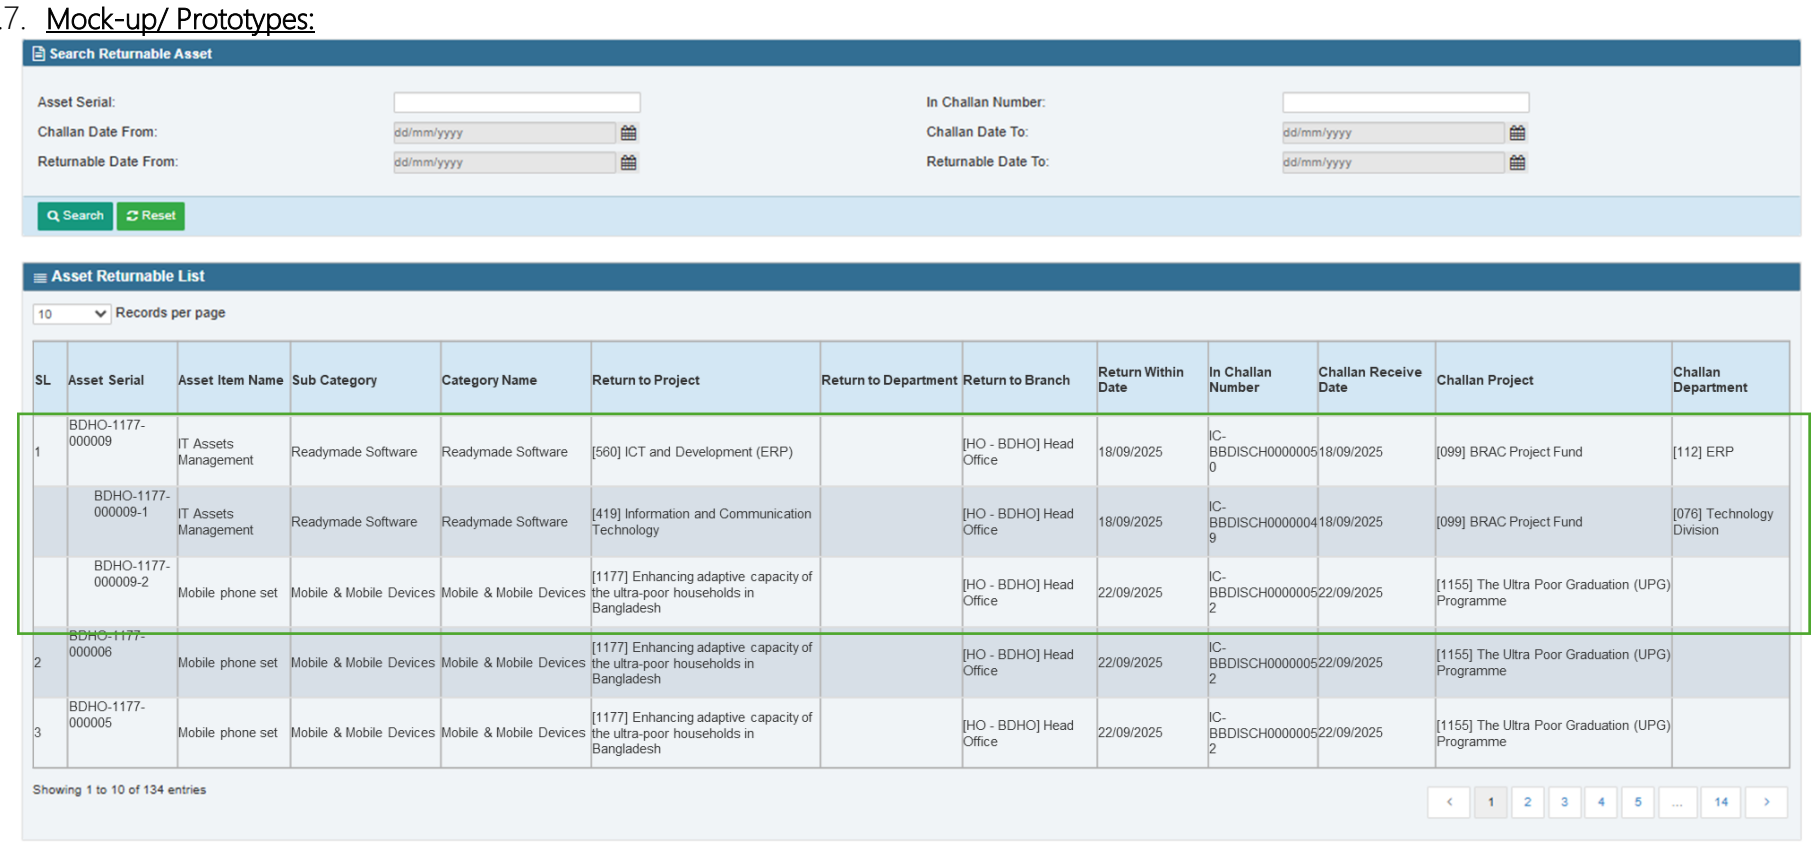


Figure: Changes in Asset Returnable List.

15.1.8. Requirements:

- For the Add Asset Returnable List data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.

15.1.9. Assumptions:

- N/A

15.1.10. Non-functional Requirements:

- N/A

15.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

15.1.12. Exceptions:

- N/A

16. Asset Expenditure | F16 | <Feature JIRA ID>

16.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F16S01 | <Story JIRA ID>

16.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborate view of the asset expenditure.

16.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Expenditure from the top menu bar.
- Select and click on the Asset Expenditure feature.

16.1.3. Actors:

- Authorized user.

16.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

16.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

16.1.6. Impacted Areas:

- Asset Expenditure

16.1.7. Mock-up/ Prototypes:

SL	Asset Serial	Asset Item Name	Asset Sub Category	Asset Category	Asset Group	Branch Name	Project Name	Expense Amount	Action
1	BBDASR00214677	Sr. Executive Chair	Furniture	Furniture	Furniture and Fixture	[HO - BDHO] Head Office	[015] Microfinance (Dabi)	0.00	
	BBDASR00214677-1	Sr. Executive Chair	Furniture	Furniture	Furniture and Fixture	[HO - BDHO] Head Office	[015] Microfinance (Dabi)	0.00	
	BBDASR00214677-2	Sr. Executive Chair	Furniture	Furniture	Furniture and Fixture	[HO - BDHO] Head Office	[015] Microfinance (Dabi)	0.00	
	BBDASR00214677-3	Sr. Executive Chair	Furniture	Furniture	Furniture and Fixture	[HO - BDHO] Head Office	[015] Microfinance (Dabi)	0.00	

Figure: List of Asset data grid in Asset Expenditure Details pop-up window.

16.1.8. Requirements:

- For **List of Asset** data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
  iv. In asset serial field, there will be no extended asset serial can be fetched if searched. Users can input expense for both asset and extended assets.
  v. Assets having only 'IN USE' status will be shown in the list.

16.1.9. Assumptions:

- N/A

16.1.10. Non-functional Requirements:

- N/A

16.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

16.1.12. Exceptions:

- N/A

17. Asset Expenditure Approval| F17 | <Feature JIRA ID>

17.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F17S01 | <Story JIRA ID>

17.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset expenditure approval.

17.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Expenditure from the top menu bar.
- Select and click on the Asset Expenditure Approval List feature.

17.1.3. Actors:

- Authorized user.

17.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.
  ii. During asset expense transactions, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

17.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

17.1.6. Impacted Areas:

- Asset Sale Approval List

17.1.7. Mock-up/ Prototypes:

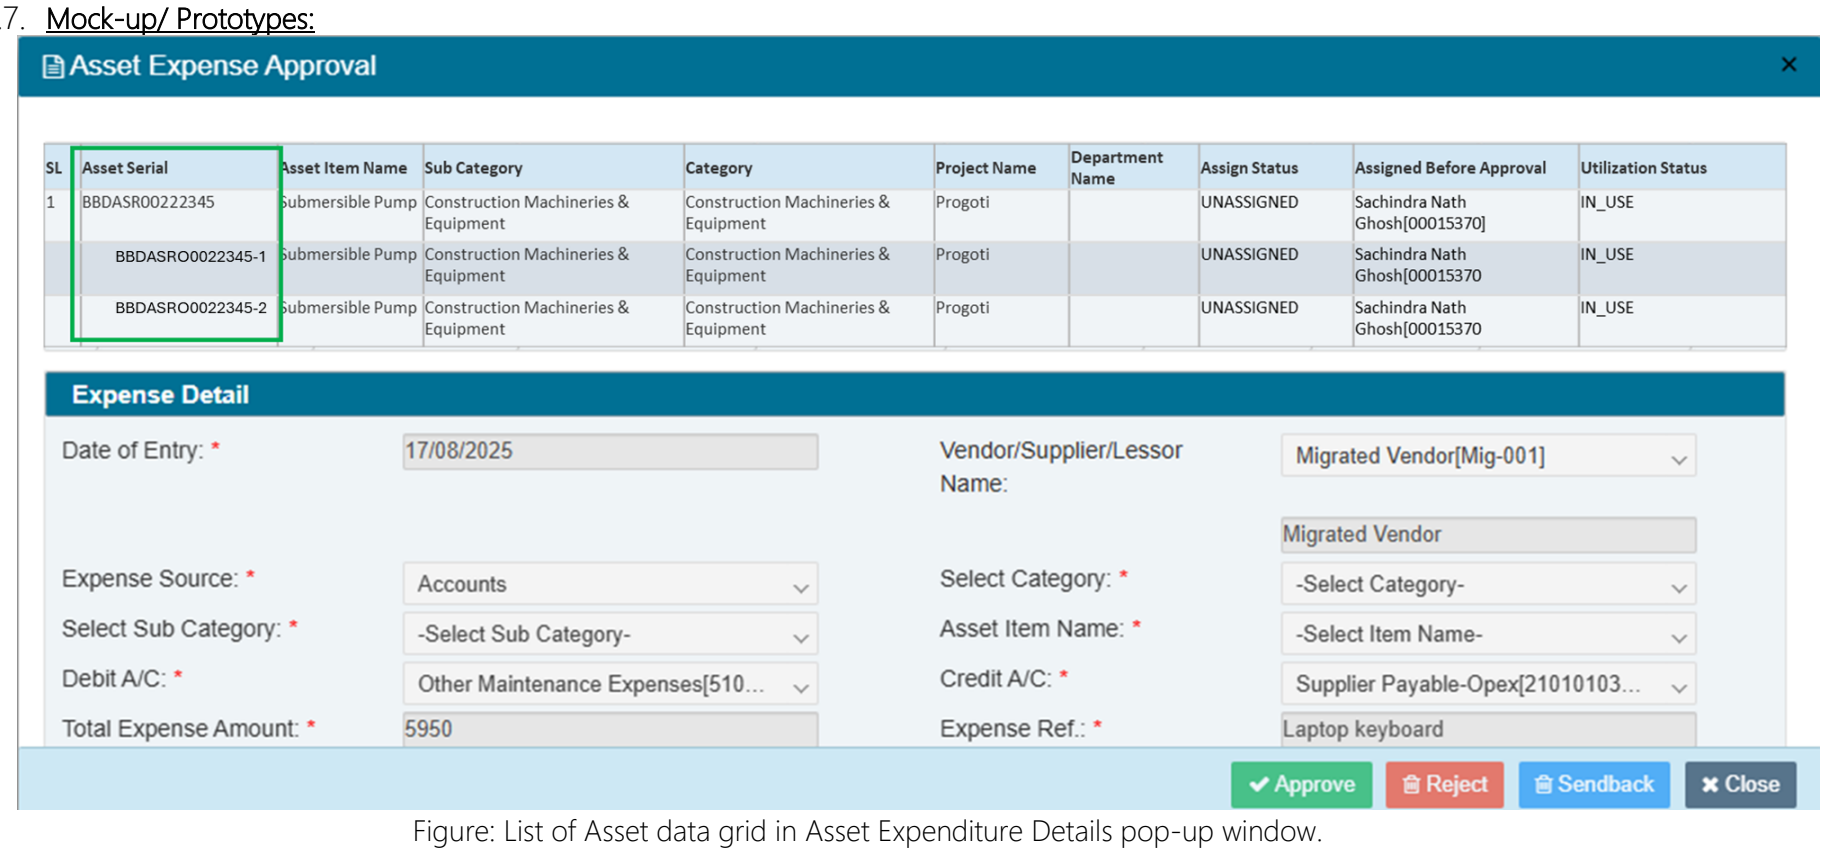


Figure: List of Asset data grid in Asset Expenditure Details pop-up window.

17.1.8. Requirements:

- For List of Asset data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
- During asset expenditure transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

17.1.9. Assumptions:

- N/A

17.1.10. Non-functional Requirements:

- N/A

17.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

17.1.12. Exceptions:

- N/A

18. Asset Write Off | F18 | <Feature JIRA ID>

18.1. New validation will be added on not letting the user select any extended/subsidiary asset | F18S01 | <Story JIRA ID>

18.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Disposal Write off** and ensure that when I perform **Asset Disposal via Write off** on a parent asset, all associated extended/subsidiary assets automatically **be disposed** with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

18.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Disposal from the top menu bar.
- Select and click on the Asset Write-Off feature.

18.1.3. Actors:

- Authorized user.

18.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  i. The user will not be able to select the Extended/subsidiary assets.
  ii. Only parent assets will be available for selection.
  iii. When a transfer is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.
  iv. Extended/Subsidiary assets will be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  v. During any write-off, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

18.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

18.1.6. Impacted Areas:

- Asset Write-Off
- Asset Write-Off List
- Asset Write-Off Approval List

18.1.7. Mock-up/ Prototypes:

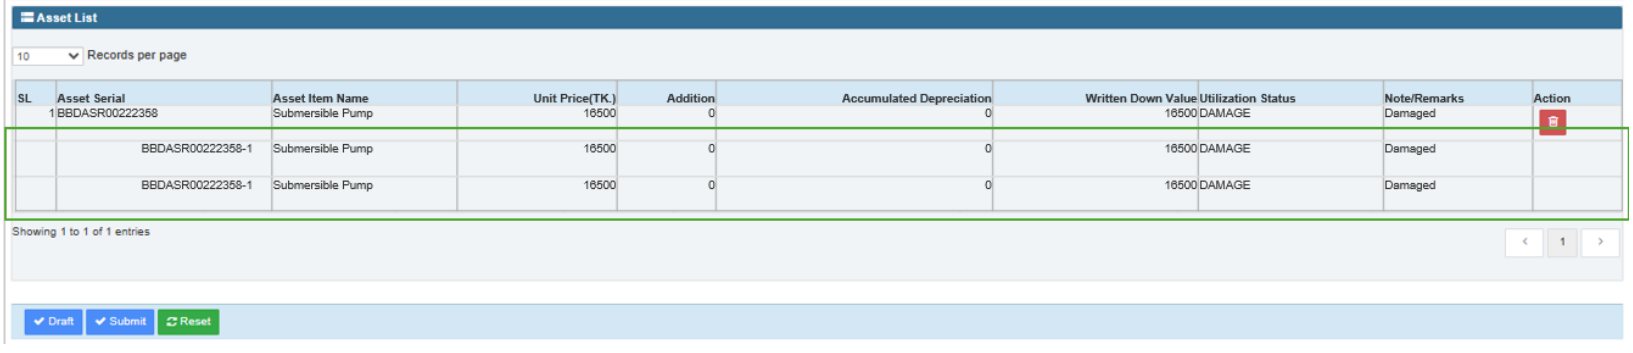


Figure: Asset List Data grid in Asset Write-Off feature.

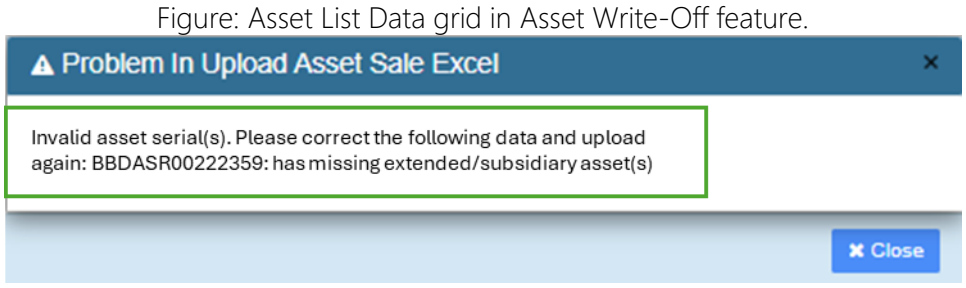


Figure: Validation Message for selecting extended/subsidiary asset in bulk upload via excel template.

18.1.8. Requirements:

- For asset disposal via **Write-Off** purpose,
  i. **One By One:** The Asset Serial dropdown will display both parent assets and extended (child) assets. During single (one-by-one) processing, the system will validate whether the selected asset is a parent or an extended asset and will not allow the selection of both types within the same request. Users may select extended assets independently and execute the operation accordingly. However, if a parent asset is selected, the system will automatically include all associated extended (child) assets in the operation.
  ii. **Bulk Operation:** During bulk upload via the Excel template, the system will validate whether the uploaded data contains extended (subsidiary) assets, either individually or along with their corresponding parent assets. If a parent asset is included in the file, the system will verify that all associated extended (subsidiary) assets under that parent are also included in the upload. If any required extended assets are missing, the system will restrict the upload and display a validation message such as:
  "Invalid asset serial(s). Please correct the following data and upload again: [Parent Asset Serial] has missing extended/subsidiary asset(s)."
- When a user selects a parent asset with extended/subsidiary assets via Add button for **One-by-One upload** or via **excel upload**, the system will fetch all associated extended/subsidiary assets and include them in the Asset List data grid.
- For **Asset List** data grid,

i. In the Asset List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
iv. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove an extended asset from the auto-included list.
v. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.

- During any write-off transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- For assets, the write-off of an extended asset can be performed independently, without requiring the parent asset to be written off. To do so, the system will consider Utilization Status other than "IN_USE" and Assigned status to be "Unassigned".
- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.
- During a new extended asset addition, when it is already acknowledged in HOFA but pending approval in HOFIN the parent asset (with/without extended asset) will be restricted from transactions like Transfer/Shipment/Write-off/Sale in fixed asset module.
- During a new extended asset addition, when acknowledgement is pending in HOFA then the parent asset (with/without extended asset) will be restricted for transactions like Transfer/Shipment/Write-off/Sale in fixed asset module
- During the asset addition, if extended asset is in progress for disposal (utilization status changed or submitted for disposal) Parent asset(with/without extended asset) will be restricted for any transaction like Shipment/Challan/Disposal.

18.1.9. Assumptions:
- N/A

18.1.10. Non-functional Requirements:
- N/A

18.1.11. Acceptance Criteria:
- The Asset Serial dropdown field in the One-by-One write-off process must only display parent assets, and no extended or subsidiary asset may appear in the dropdown list.
- When uploading asset serials through the Excel bulk upload template, the system is validating the file and preventing completion of the upload if any extended or subsidiary assets are included, displaying a validation message with the invalid extended/subsidiary serial numbers from the file.
- When a parent asset is selected for write-off (in both One-by-One and bulk upload processes), the system must automatically fetch all associated active extended/subsidiary assets and include them in the Asset List data grid.
- In the Asset List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
- Removing a parent asset from the Asset List grid must automatically remove all associated extended/subsidiary assets from the list.
- The system must dispose of the parent asset and all auto-included extended/subsidiary assets together as part of the same write-off transaction.
- After submission, the write-off transaction must follow the existing approval workflow, and parent and extended/subsidiary assets must appear together in all downstream transactions and approval records.

18.1.12. Exceptions:
- N/A

19. Asset Write Off List | F19 | <Feature JIRA ID>

19.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F19S01 | <Story JIRA ID>

19.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

19.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Disposal from the top menu bar.
- Select and click on the Asset Write-Off List feature.

19.1.3. Actors:

- Authorized user.

19.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

19.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

19.1.6. Impacted Areas:

- Asset Write-Off List

19.1.7. Mock-up/ Prototypes:

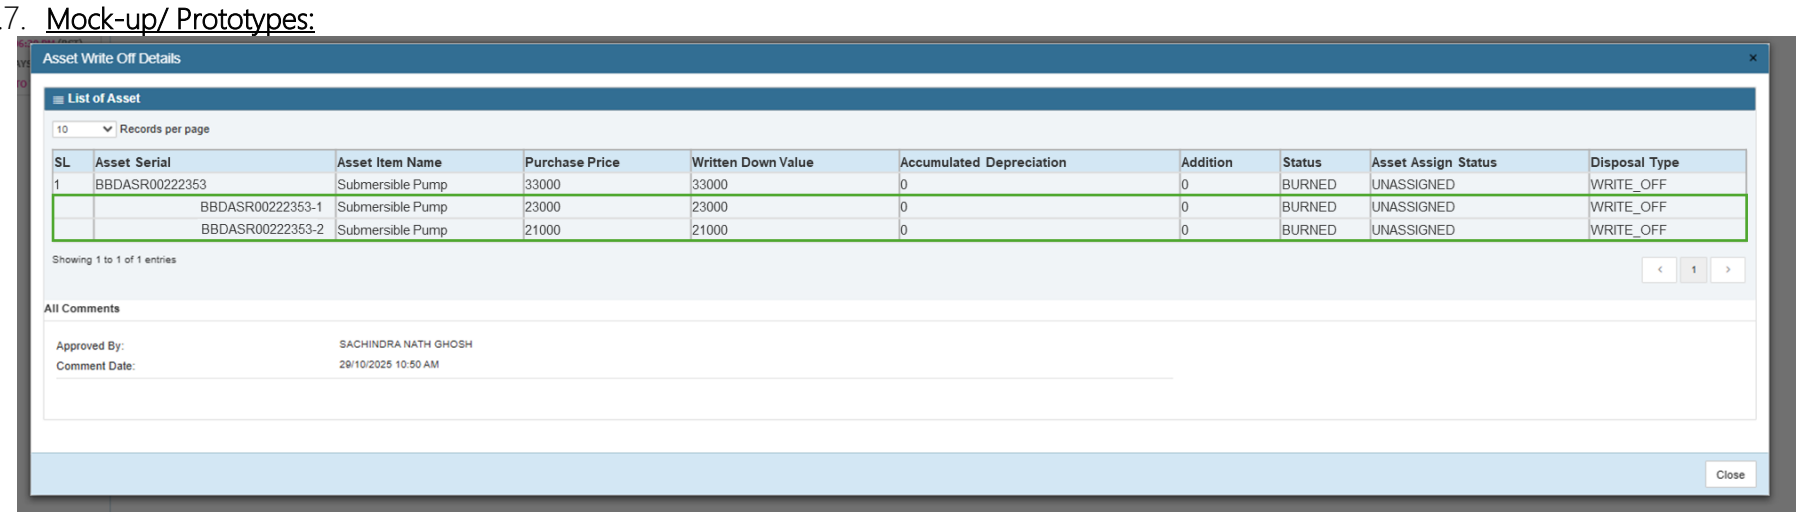


Figure: List of Asset data grid in Asset Write Off Details pop-up window.

19.1.8. Requirements:

- For List of Asset data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
- For assets, the write-off of an extended asset can be performed independently, without requiring the parent asset to be written off. To do so, the system will consider Utilization Status other than "IN_USE" and Assigned status to be "Unassigned".

19.1.9. Assumptions:

- N/A

19.1.10. Non-functional Requirements:

- N/A

19.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

19.1.12. Exceptions:

- N/A

20. Asset Write Off Approval List | F20 | <Feature JIRA ID>

20.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F20S01 | <Story JIRA ID>

20.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset transfers via shipment.

20.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Disposal from the top menu bar.
- Select and click on the Asset Write-Off Approval List feature.

20.1.3. Actors:

- Authorized user.

20.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.
  ii. During any write-off transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

20.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

20.1.6. Impacted Areas:

- Asset Write-Off Approval List

20.1.7. Mock-up/ Prototypes:

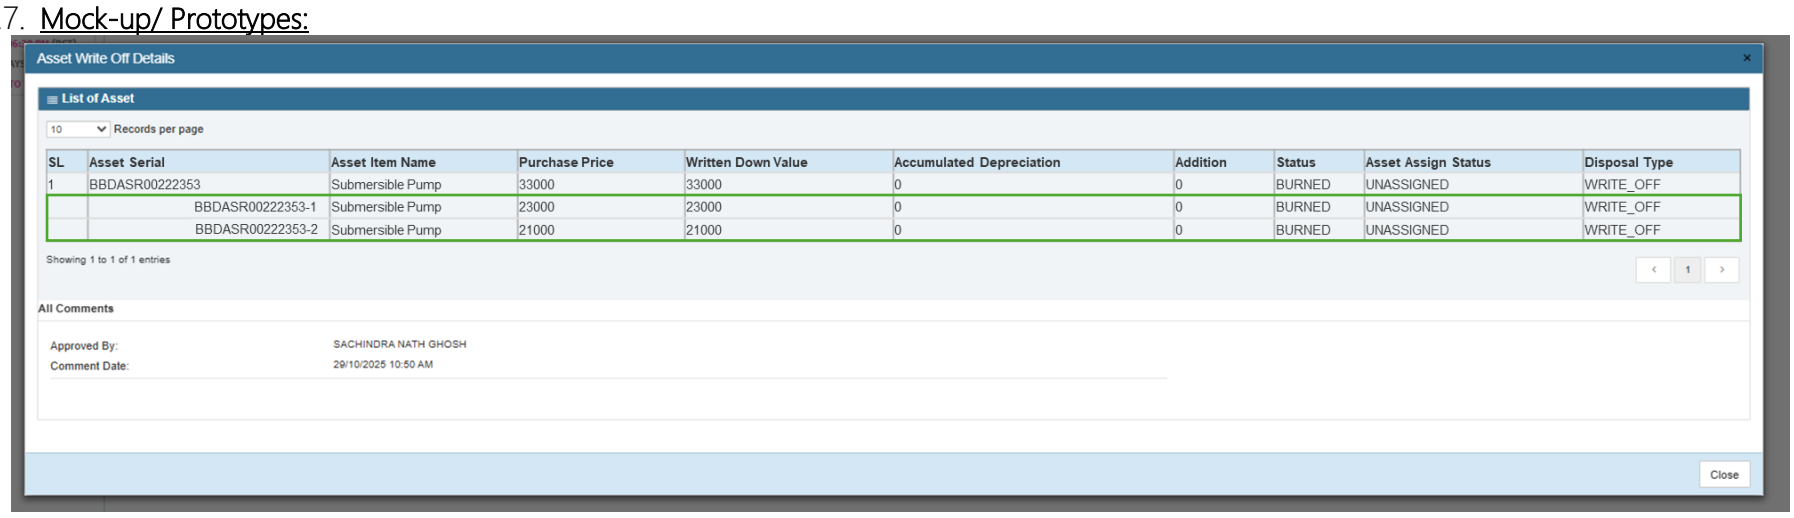


Figure: List of Asset data grid in Asset Write Off Details pop-up window.

20.1.8. Requirements:

- For List of Asset data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
- During any write-off transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- For assets, the write-off of an extended asset can be performed independently, without requiring the parent asset to be written off. To do so, the system will consider Utilization Status other than "IN_USE" and Assigned status to be "Unassigned".

20.1.9. Assumptions:

- N/A

20.1.10. Non-functional Requirements:

- N/A

20.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

20.1.12. Exceptions:

- N/A

21. Asset Sale | F21 | <Feature JIRA ID>

21.1. New validation will be added on not letting the user select any extended/subsidiary asset | F21S01 | <Story JIRA ID>

21.1.1. User Story:

As an authorized user, I want the system to prevent extended/subsidiary assets from being selected for **Asset Disposal Sale** and ensure that when I perform **Asset Disposal via Sale** on a parent asset, all associated extended/subsidiary assets automatically be disposed with the parent asset, so that the asset hierarchy remains consistent, and parent-extended/subsidiary asset relationship is maintained appropriately across the system.

21.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Disposal from the top menu bar.
- Select and click on the Asset Sale feature.

21.1.3. Actors:

- Authorized user.

21.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system hence there is no such validation on extended/subsidiary asset not being selected and any activity on parent asset to impact extended/subsidiary asset as well.
- **New Scope:**
  - i. The user will be able to select the Extended/subsidiary assets.
  - ii. Parent assets will be available for selection as well.
  - iii. When a transfer is completed with parent asset, the transaction/operation will also impact the extended/subsidiary asset to that particular parent asset similarly.
  - iv. Extended/Subsidiary assets will be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  - v. During asset sale transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

21.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

21.1.6. Impacted Areas:

- Asset Sale
- Asset Sale List
- Asset Sale Approval List

21.1.7. Mock-up/ Prototypes:

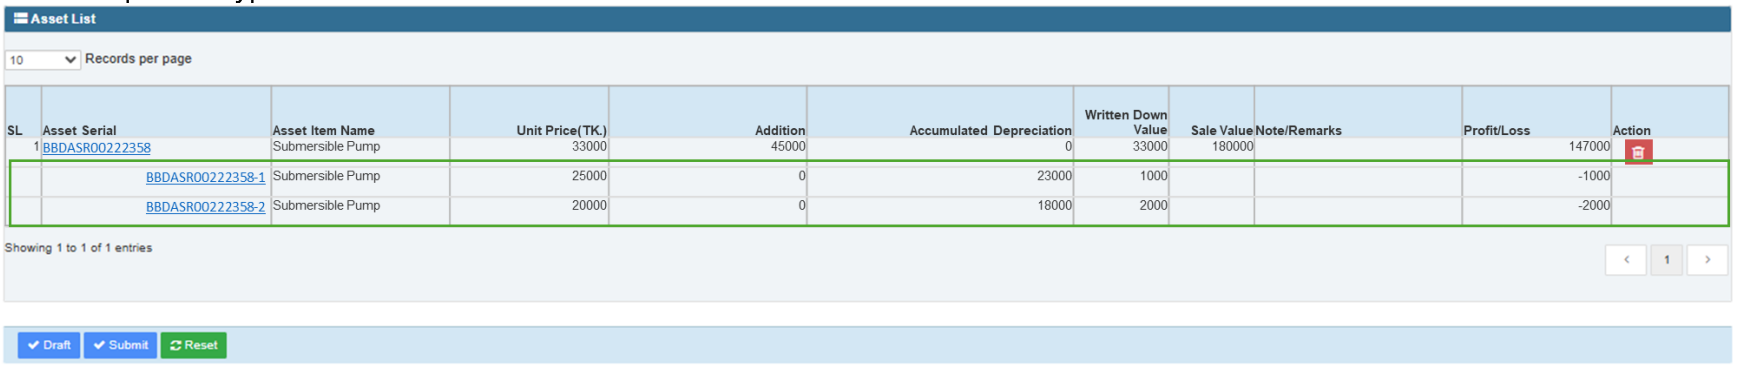


Figure: Asset List Data grid in Asset Sale feature.

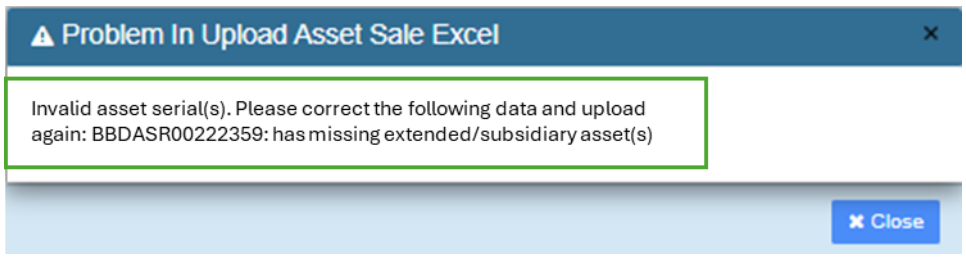


Figure: Validation Message for selecting extended/subsidiary asset in bulk upload via excel template.

21.1.8. Requirements:

- For asset disposal via **Sale** purpose,
  - i. **One By One:** The Asset Serial dropdown will display both parent assets and extended assets. During single (one-by-one) processing, the system will validate whether the selected asset is a parent or an extended asset and will not allow the selection of both types within the same request. Users may select extended assets independently and execute the operation accordingly. However, if a parent asset is selected, the system will automatically include all associated extended (child) assets in the operation.
  - ii. **Bulk Operation:** During bulk upload via the Excel template, the system will validate whether the uploaded data contains extended (subsidiary) assets, either individually or along with their corresponding parent assets. If a parent asset is included in the file, the system will verify that all associated extended (subsidiary) assets under that parent are also included in the upload. If any required extended assets are missing, the system will restrict the upload and display a validation message such as: **"Invalid asset serial(s). Please correct the following data and upload again: [Parent Asset Serial] has missing extended/subsidiary asset(s)."**
- When a user selects a parent asset with extended/subsidiary assets via Add button for **One-by-One upload** or via **excel upload**, the system will fetch all associated extended/subsidiary assets and include them in the Asset List data grid.
- For **Asset List** data grid,

i. In the Asset List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
iv. No action button will be available for the extended/subsidiary assets. Users cannot deselect or remove a extended asset from the auto-included list.
v. Any activity on the parent asset, such as removing the parent asset from the grid, will have a similar impact on the extended/subsidiary asset as well.

- During asset sale transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- For assets, the sale of an extended asset can be performed independently, without requiring the parent asset to be sale.
- The Gain/Loss will be calculated based on the total sale price of the asset. The system will first allocate the full sale price to the parent asset and calculate its Gain/Loss. Any remaining sale value will then be gradually distributed among the extended (child) assets, and Gain/Loss will be calculated sequentially for each child asset based on the allocated amount. An example scenario is provided below for better understanding.

Total Sale amount assigned to Parent asset then gradually extended assets				
Asset	Purchase Price	WDV	Sale Price	Gain/Loss
Parent Asset	33000	33000	180000	147000
Extended Asset 1	25000	1000	0	-1000
Extended Asset 2	20000	2000	0	-2000

- During a new extended asset addition, if the parent asset (with/without extended asset) is already within a transaction like Transfer/Shipment/Write-off/Sale then the extended asset addition needs to be restricted in HOFIN module during submission of the request.
- During a new extended asset addition, when it is already acknowledged in HOFA but pending approval in HOFIN the parent asset (with/without extended asset) will be restricted from transactions like Transfer/Shipment/Write-off/Sale in fixed asset module.
- During a new extended asset addition, when acknowledgement is pending in HOFA then the parent asset (with/without extended asset) will be restricted for transactions like Transfer/Shipment/Write-off/Sale in fixed asset module
- During the asset addition, if extended asset is in progress for disposal (utilization status changed or submitted for disposal) Parent asset(with/without extended asset) will be restricted for any transaction like Shipment/Challan/Disposal.

21.1.9. Assumptions:
- N/A

21.1.10. Non-functional Requirements:
- N/A

21.1.11. Acceptance Criteria:
- The Asset Serial dropdown field in the One-by-One Sale Disposal process must only display parent assets, and no extended or subsidiary asset may appear in the dropdown list.
- When uploading asset serials through the Excel bulk upload template, the system is validating the file and preventing completion of the upload if any extended or subsidiary assets are included, displaying a validation message with the invalid extended/subsidiary serial numbers from the file.
- When a parent asset is selected for Sale Disposal (in both One-by-One and bulk upload processes), the system must automatically fetch all associated active extended/subsidiary assets and include them in the Asset List data grid.
- In the Asset List data grid, for every parent asset selected, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
- Removing a parent asset from the Asset List grid must automatically remove all associated extended/subsidiary assets from the list.
- The system must dispose of the parent asset and all auto-included extended/subsidiary assets together as part of the same Disposal Sale transaction.
- After submission, the Disposal Sale transaction must follow the existing approval workflow, and parent and extended/subsidiary assets must appear together in all downstream transactions and approval records.

21.1.12. Exceptions:
- N/A

22. Asset Sale List | F22 | <Feature JIRA ID>

22.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F22S01 | <Story JIRA ID>

22.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset sale.

22.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Disposal from the top menu bar.
- Select and click on the Asset Sale List feature.

22.1.3. Actors:

- Authorized user.

22.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.

22.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

22.1.6. Impacted Areas:

- Asset Sale List

22.1.7. Mock-up/ Prototypes:

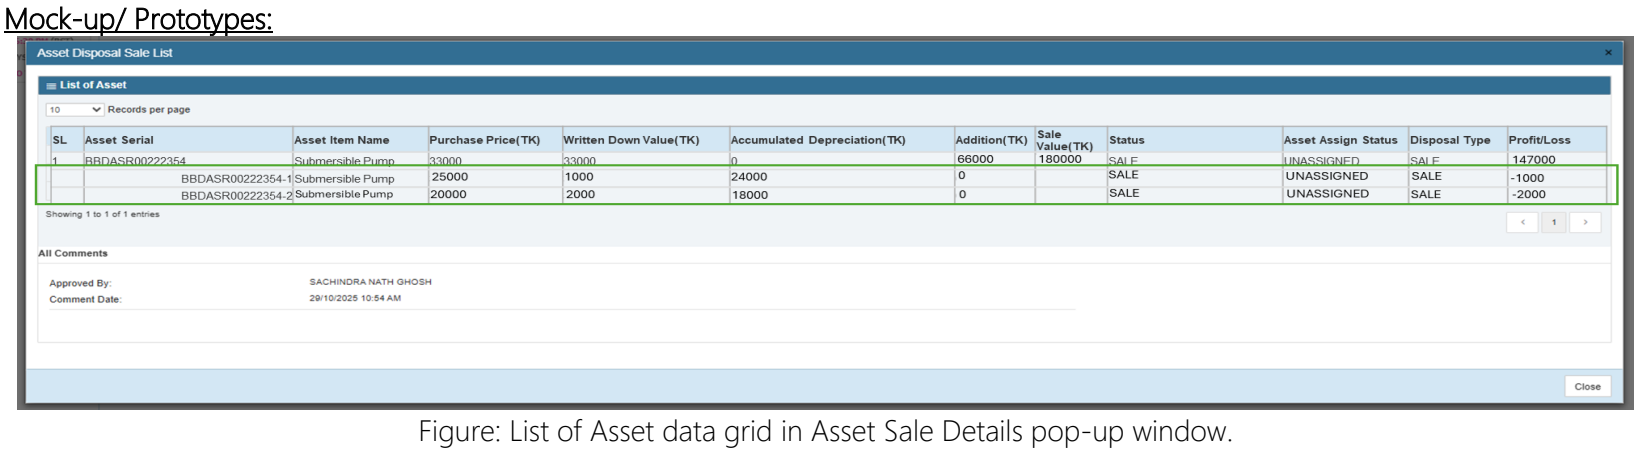


Figure: List of Asset data grid in Asset Sale Details pop-up window.

22.1.8. Requirements:

- For List of Asset data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. 4 space indentation will be applied.
- For assets, the sale of an extended asset can be performed independently, without requiring the parent asset to be sale. To do so, the system will consider Utilization Status other than "IN_USE" and Assigned status to be "Unassigned".
- The Gain/Loss will be calculated based on the total sale price of the asset. The system will first allocate the full sale price to the parent asset and calculate its Gain/Loss. Any remaining sale value will then be gradually distributed among the extended (child) assets, and Gain/Loss will be calculated sequentially for each child asset based on the allocated amount. An example scenario is provided below for better understanding.

Total Sale amount assigned to Parent asset then gradually extended assets				
Asset	Purchase Price	WDV	Sale Price	Gain/Loss
Parent Asset	33000	33000	180000	147000
Extended Asset 1	25000	1000	0	-1000
Extended Asset 2	20000	2000	0	-2000

22.1.9. Assumptions:

- N/A

22.1.10. Non-functional Requirements:

- N/A

22.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.
- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

22.1.12. Exceptions:

- N/A

23. Asset Sale Approval List | F23 | <Feature JIRA ID>

23.1. Extended/Subsidiary asset will show with right indentation below parent asset on the list view | F23S01 | <Story JIRA ID>

23.1.1. User Story:

As an authorized user, I want the system to show and list the extended/subsidiary assets under the parent assets in the list pages so that I can have an accurate and elaborated view of the asset sale approval list.

23.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Disposal from the top menu bar.
- Select and click on the Asset Sale Approval List feature.

23.1.3. Actors:

- Authorized user.

23.1.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Extended/subsidiary assets will be shown and listed below their designated parent asset.
  ii. During asset sale transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.

23.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

23.1.6. Impacted Areas:

- Asset Sale Approval List

23.1.7. Mock-up/ Prototypes:

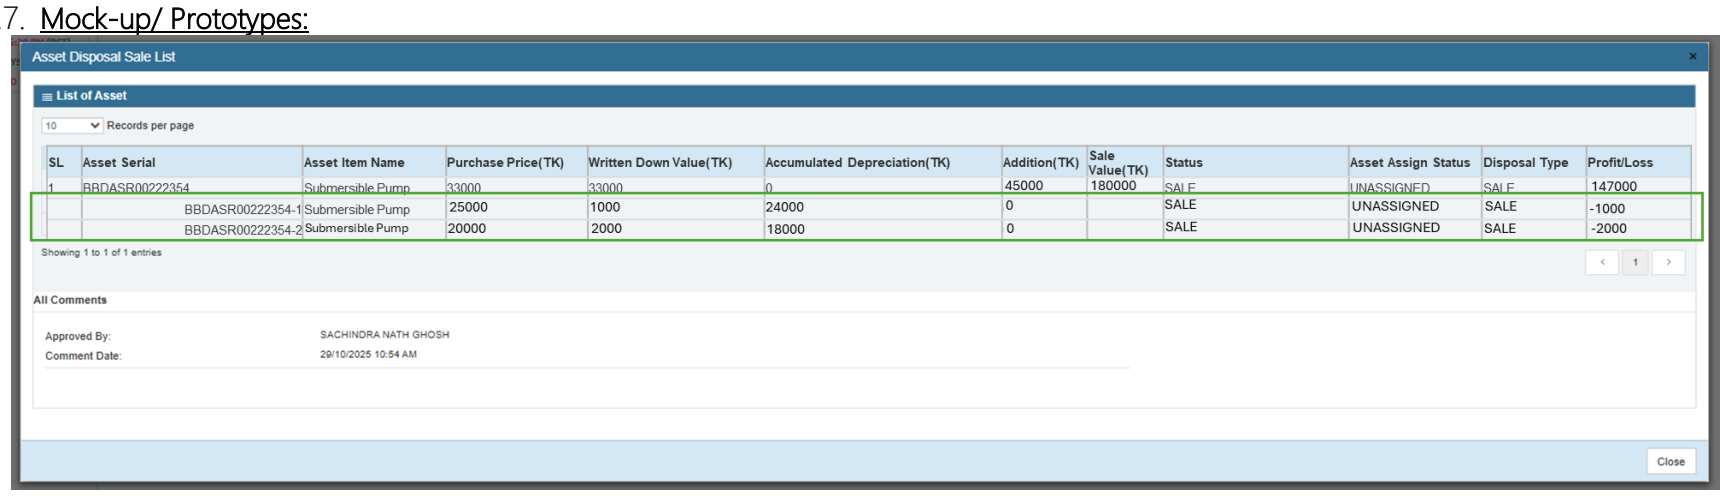


Figure: List of Asset data grid in Asset Sale Details pop-up window.

23.1.8. Requirements:

- For **List of Asset** data grid,
  i. For every parent asset, the related extended/subsidiary asset(s) (if any) will also be listed below the parent asset with right indentation on the asset serial and no action button (remove/delete) for the extended/subsidiary assets.
  ii. Extended/subsidiary assets under a parent asset will not contain the list serial no (SL) in the list.
  iii. The asset serial numbers of the extended asset in the Asset Serial column will be indented to the right for visual distinction. **4 space indentation will be applied.**
- During asset sale transaction, the Fixed Asset module will transmit the combined accumulated data of both parent and extended assets to the respective finance module using the Parent Asset Serial JSON reference value.
- For assets, the sale of an extended asset can be performed independently, without requiring the parent asset to be sale. To do so, the system will consider Utilization Status other than "IN_USE" and Assigned status to be "Unassigned".
- The Gain/Loss will be calculated based on the total sale price of the asset. The system will first allocate the full sale price to the parent asset and calculate its Gain/Loss. Any remaining sale value will then be gradually distributed among the extended (child) assets, and Gain/Loss will be calculated sequentially for each child asset based on the allocated amount. An example scenario is provided below for better understanding.

Total Sale amount assigned to Parent asset then gradually extended assets				
Asset	Purchase Price	WDV	Sale Price	Gain/Loss
Parent Asset	33000	33000	180000	147000
Extended Asset 1	25000	1000	0	-1000
Extended Asset 2	20000	2000	0	-2000

23.1.9. Assumptions:

- N/A

23.1.10. Non-functional Requirements:

- N/A

23.1.11. Acceptance Criteria:

- Extended/subsidiary assets included under a parent asset must appear immediately below the parent asset with right indentation of the asset serial number for clear visual distinction.

- Extended/subsidiary assets must not display any list serial number (SL) in the grid.

23.1.12. Exceptions:

- N/A

24. Asset Split | F24 | <Feature JIRA ID>

24.1. Validation to Restrict Asset Split for Assets Having Assets Extension | F24S01 | <Story JIRA ID>

24.1.1. User Story:

As an authorized user, I want the system to restrict asset split for any asset that has associated extended/subsidiary assets, so that assets with parent–extended/subsidiary relationships cannot be split, and data integrity is maintained.

24.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Asset Profile from the top menu bar.
- Select and click on the Asset Split feature.

24.1.3. Actors:

- Authorized user.

24.1.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. The system will not show any extended/subsidiary asset(s) in the List of Global Asset Serial data grid under the Asset Split feature.
  ii. Validation to restrict asset split for assets having extended/subsidiary assets

24.1.5. Pre-condition:

- Parent–extended/subsidiary asset relationship must exist and be approved through asset addition.

24.1.6. Impacted Areas:

- Asset Split

24.1.7. Mock-up/ Prototypes:

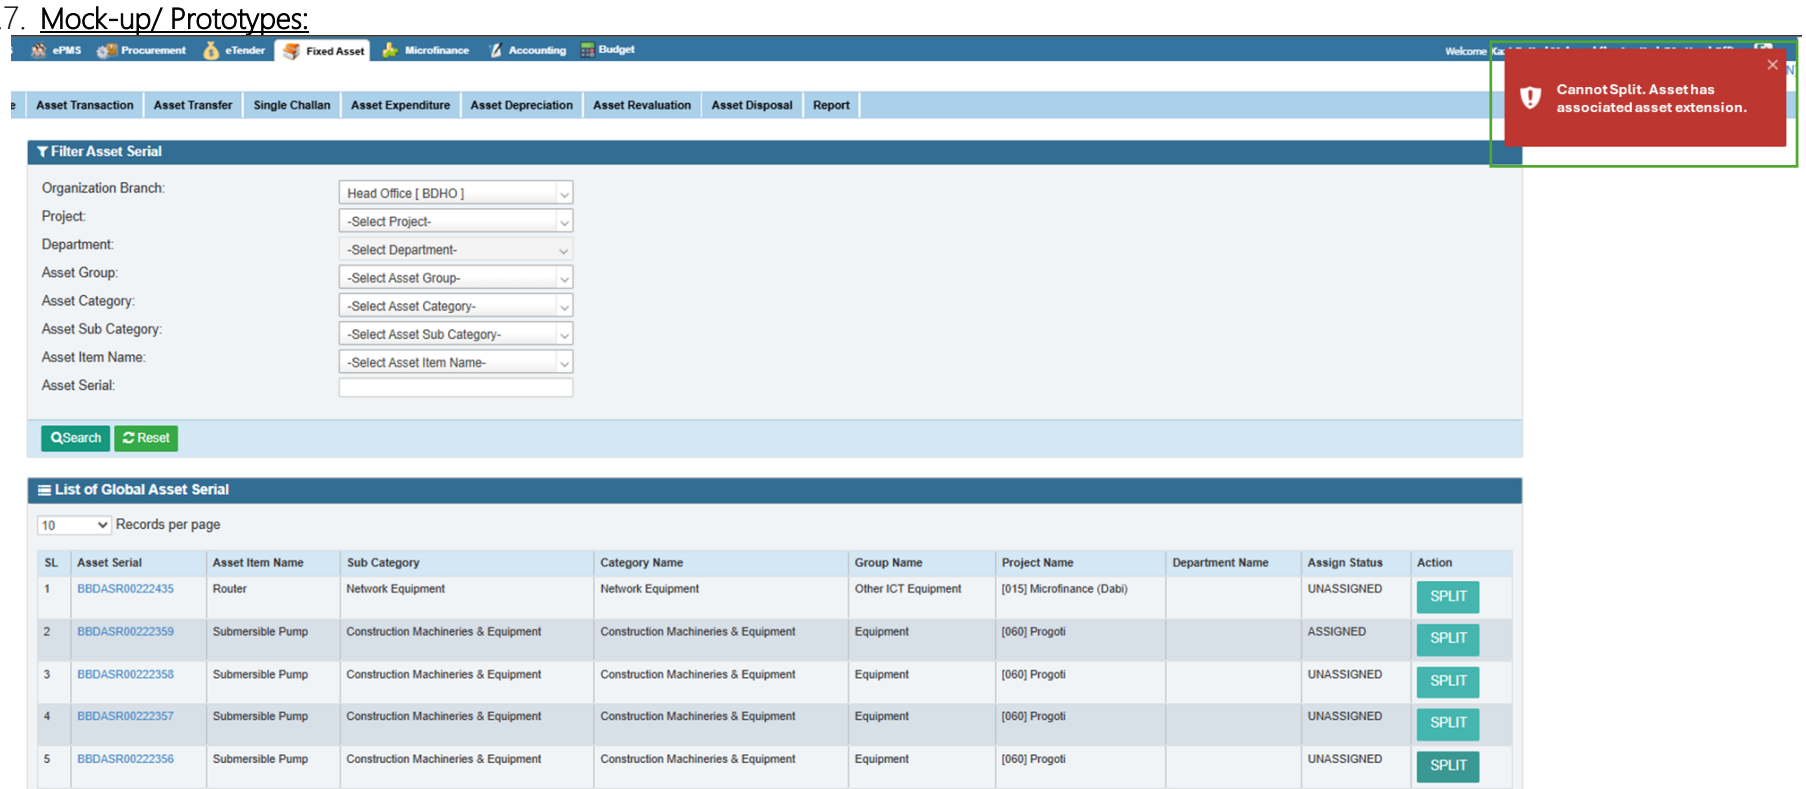


Figure: Validation message for extended/subsidiary asset's measurement unit not being above zero.

24.1.8. Requirements:

- In the List of Global Asset Serial data grid, no extended/subsidiary asset will be shown for the user to select.
- When a parent asset is selected for asset split, the system must check whether any active extended/subsidiary asset is associated with it.
- If one or more active extended/subsidiary assets exist under the selected parent asset, the system must prevent the asset split operation.
- When users click on split button, the system must display a validation message stating: "Cannot Split. Asset has associated asset extension."
- Other than this, Asset Split will follow the current process of Asset Split.

24.1.9. Assumptions:

- N/A

24.1.10. Non-functional Requirements:

- N/A

24.1.11. Acceptance Criteria:

- The Asset Split feature must display only parent assets in the List of Global Asset Serial data grid.
- If a selected parent asset has one or more active extended/subsidiary assets, the system must block the asset split operation.
- The system must display a clear validation message when the split operation is restricted.

24.1.12. Exceptions:

- N/A

25. New and Existing Impacted Reports | F25 | <Feature JIRA ID>

25.1. Asset Addition List Report | F25S01 | <Story JIRA ID>

25.1.1. User Story:

As an authorized user, I want to view a new Asset Addition List Report so that I can view the Parent and extended asset List report as per selected criteria.

25.1.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Addition List.

25.1.3. Actors:

- Authorized HO User

25.1.4. Scope:

- **Current Scope:** Currently there is no asset addition list report in the system.
- **New Scope:**
  i. This report will display both parent assets and their associated extended assets as maintained in the Fixed Asset module.

25.1.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.1.6. Impacted Areas:

- Asset Addition List Report

25.1.7. Mock-up/ Prototypes:

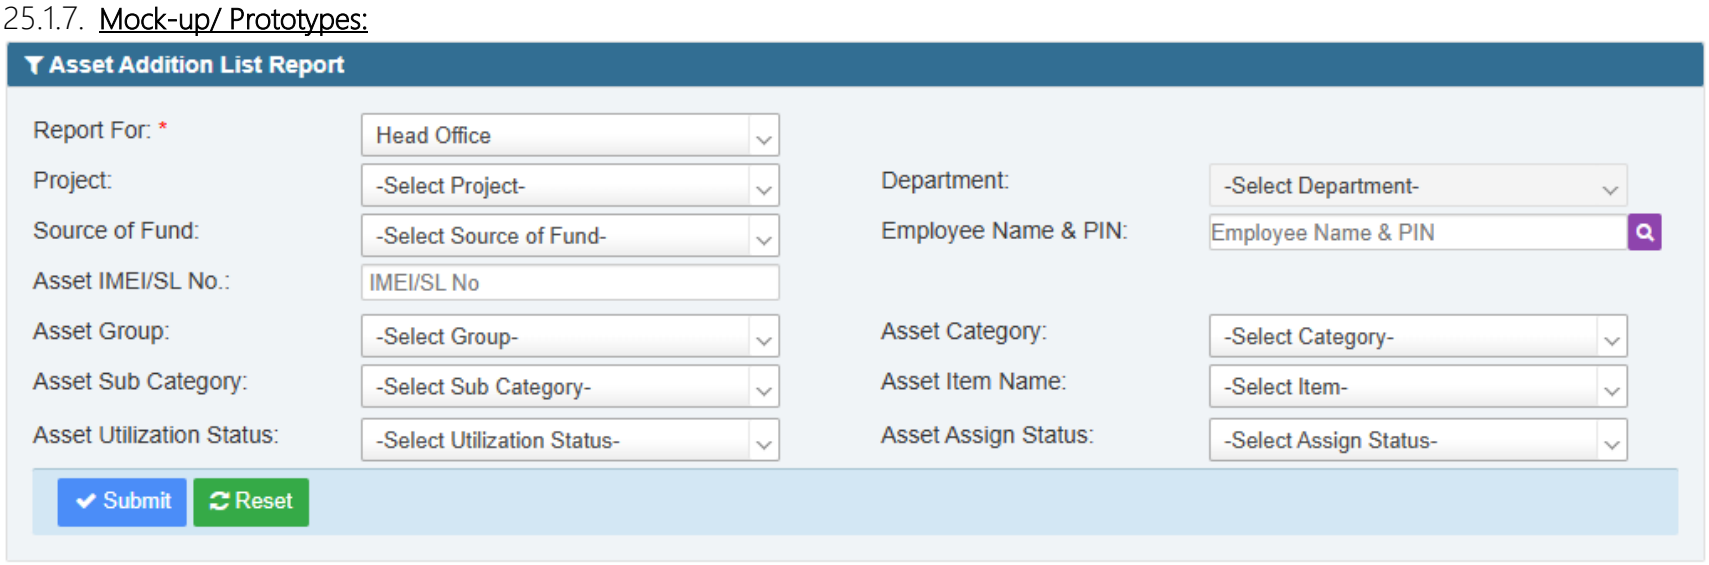


Figure: Filtering Criteria (Head Office)

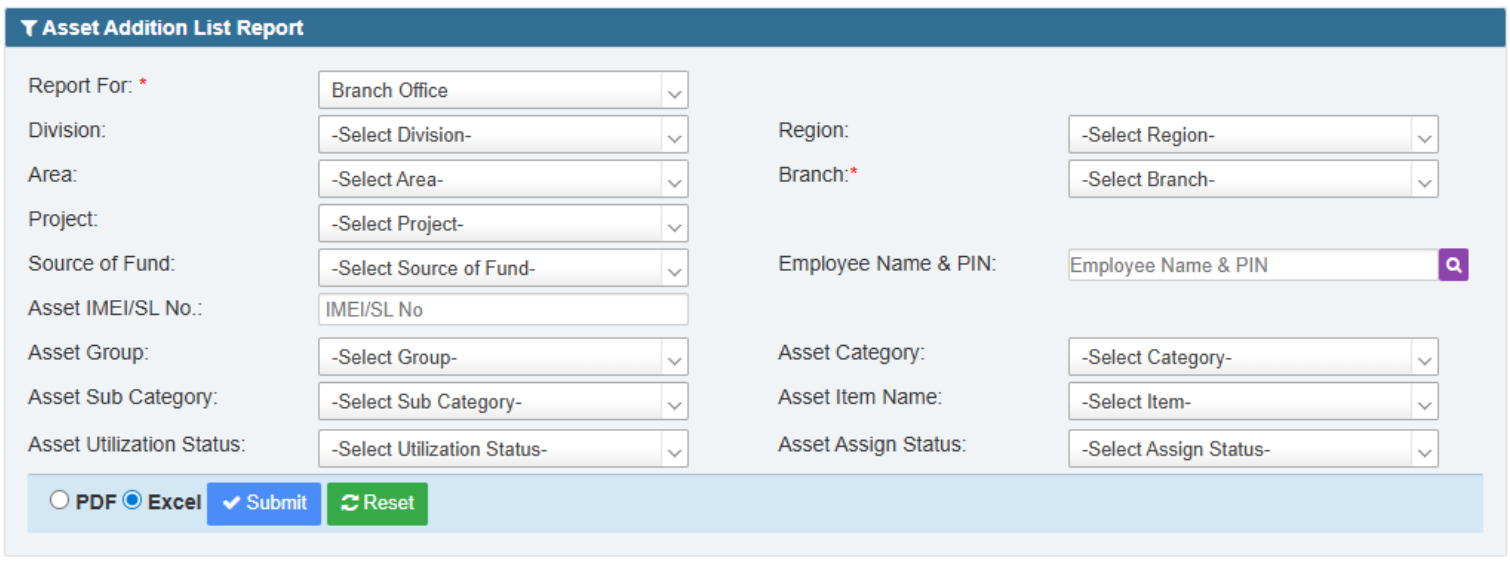


Figure: Filtering Criteria (Branch Office)

BRAC
Location: [BO - 0605] Gulshan

List of Asset Addition

Project: All | Source of Fund: All | As on Date: 2/12/2025

SL	Asset Serial	RFID	Asset IMEI/SL No.	Asset Name	Sub Category	Category	Group	Asset Purchase/Addition Date	Asset Registration Date	Project	Department	Current Location	Assign Status	Employee Name & PIN	Utilization Status	Purchase/ Addition Price	Accumulated Depreciation	Written Down Value
1	BBDASR00223096			Sofa	Wooden Furniture	Furniture	Furniture and Fixture	31/10/2025	1/12/2025	[015] Microfinance (Dabi)			UNASSIGNED		IN_USE	10000	2000	8000
2	BBDASR00223067		5CD5113WMX	Laptop	Laptop	Laptop	Computer/Laptop	1/12/2025	1/12/2025	[099] BRAC Project Fund			ASSIGNED	Shekh Mosammat Rokeya Akter-00128306	IN_USE	2000	500	1500
3	BBDASR00223067-1		5CD5113WMX	Laptop	Laptop	Laptop	Computer/Laptop	1/12/2025	1/12/2025	[099] BRAC Project Fund			ASSIGNED	Mohammad Mahabubur Rahman-00034157	IN_USE	1500	250	1250
4	BBDASR00223067-2		5CD5113WNW	Laptop	Laptop	Laptop	Computer/Laptop	27/11/2025	30/11/2025	[706] Climate Change Programme			UNASSIGNED		IN_USE	3000	700	2300
5	BBDASR00223067-3		5CD5113WNW	Laptop	Laptop	Laptop	Computer/Laptop	27/11/2025	30/11/2025	[706] Climate Change Programme			UNASSIGNED		IN_USE	1500	1000	500

Figure: Asset Addition List Report

25.1.8. Requirements:

- This report will only show parent assets having one or multiple extended assets in the fixed asset module

- User will be able to select from the following filtering criteria:
    i. Report For: This field will be the drop-down field with Head Office and Branch Office. If selected Head Office, then the system will show the following fields for report filtering criteria. If selected Branch Office, then system will show additional field: Division, Region, Area and Branch (as per existing business for report calling feature for Branch Office from Head Office).
    ii. Project (Drop-down, Optional)
    iii. Department (Drop-down, Optional): This field will be applicable to the selected project where required.
    iv. Source of Fund (Drop-down, Optional)
    v. Employee Name & PIN (Drop-down, Optional)
    vi. Asset Group (Drop-down, Optional)
    vii. Asset Category (Drop-down, Optional)
    viii. Asset Sub Category (Drop-down, Optional)
    ix. Asset Item Name (Drop-down, Optional)
    x. Asset Utilization Status (Drop-down, Optional)
    xi. Asset Assign Status (Drop-down, Optional)
- User have to select PDF or Excel from the radio button (if selected branch office only, otherwise for the head office there will be no PDF/Excel button as the report will be in CSV format.)
- User will click on Submit button to generate the report.
- User will be able to click on Reset button to reset the filtering criteria.
- If the user selects the PDF radio button, then system will generate PDF version of the report and show it in another tab in the browser (Only for the branch offices).

1. Report Header: The downloaded Report will have the following report header:
    a) BRAC (Only for Branch Office)
    b) Location: Name of the branch office user selected in filtering criteria (Only for Branch Office)
    c) List of Asset Addition (Only for Branch Office)
    d) Project: Show the names of selected Project during report filtering criteria. If no project is selected, mention "All"
    e) Department: Show the names of selected asset department during report filtering criteria. If no department is selected, mention "All". (Only for Head Office)
    f) Source of Fund: Show the names of selected asset source of fund during report filtering criteria. If no source of fund is selected, mention "All"
    g) As on Date: System will show as on date business date based on the report download date
2. Report Format and Columns: The report format is shared in the Mock-up/ Prototype section and details of the report are given below:
    I. SL: Auto-generated serial number for each asset in the report. This will be incremental in the downloaded report and will show total rows for the report.
    II. Asset Serial: This column will show the parent asset serial number.
    III. RFID: This column will show the parent asset RFID.
    IV. Asset IMEI/SL No.: This column will show the parent asset IMEI/SL No.
    V. Asset Name: This column will show the parent asset name.
    VI. Sub Category: This column will show the parent asset subcategory.
    VII. Category: This column will show the parent asset category.
    VIII. Group: This column will show the parent asset group.
    IX. Asset Purchase/ Addition Date: This column will show the purchase/addition date of parent/extended asset.
    X. Asset Registration Date: This column will show the parent asset registration business date.
    XI. Project: This column will show the project code and name associated with the parent asset.
    XII. Department: This column will show the department code and name associated with the parent asset.
    XIII. Current Location: This column will show the location associated with the parent asset.
    XIV. Assign Status: This column will show the assign status of asset based on the filtering criteria.
    XV. Employee Name & PIN: This column will display the name and PIN of the employee to whom the parent asset is assigned.
    XVI. Utilization Status: This column will show the utilization status of assets based on the filtering criteria.
    XVII. Purchase/ Addition Price: The column will show the purchase price of the parent Asset or extended assets.
    XVIII. Accumulated Depreciation: Total accumulated depreciation that has been charged against that specific parent/extended Asset.
    XIX. Written Down Value: This column will show the Written Down Value of the parent/extended Asset against each Asset. Calculation: Total Unit Price – Accumulated Depreciation.

25.1.9. Assumptions:
- N/A

25.1.10. Non-functional Requirements:
- N/A

25.1.11. Acceptance Criteria:
- The system is generating report as per selected filtering criteria.
- The system is generating the report as per selected (for branch Offices) /CSV (for Head Offices) format.

25.1.12. Exceptions:
- N/A

25.2. Asset List Report | F25S02 | <Story JIRA ID>

25.2.1. User Story:

As an authorized user, I want to view the Asset List Report so that I can view the Asset List report as per selected criteria.

25.2.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset List.

25.2.3. Actors:

- Authorized user.

25.2.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.2.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.2.6. Impacted Areas:

- Asset List Report

25.2.7. Mock-up/ Prototypes:

Location:	[HO - BDHO] Head Office															
Project:	All															
Departmen	All															
Source of F	All															
As on Date	1/12/2025															
SL	Asset Serial	FID	Asset IMEI/	Asset Nam	Sub Categc	Category	Group	Purchase D	Registratior	Project	Departmen	Current Loc	Employee I	Utilization S	Assign Status	
1	BBDASR002	23067	5CD5113W	Laptop	Laptop	Laptop	Computer/	1/12/2025	1/12/2025	[099] BRAC	[009] Finance and Accounts-HO			IN_USE	UNASSIGNED	
2	BBDASR002	23050	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
3	BBDASR002	23049	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
4	BBDASR002	23048	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
5	BBDASR002	23047	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
6	BBDASR002	23046	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
7	BBDASR002	23045	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
8	BBDASR002	23044	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
9	BBDASR002	23043	5CD5113W	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[706] Climate Change Programme				IN_USE	UNASSIGNED	
10	BBDASR002	23042	5CD437FC(	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[967] BRAC Learning and Leadership Developr				IN_USE	UNASSIGNED	
11	BBDASR002	23041	5CD437FC(	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[967] BRAC Learning and Leadership Developr				IN_USE	UNASSIGNED	
12	BBDASR002	23040	5CD437FC(	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[967] BRAC Learning and Leadership Developr				IN_USE	UNASSIGNED	
13	BBDASR002	23039	5CD437FC(	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[967] BRAC Learning and Leadership Developr				IN_USE	UNASSIGNED	
14	BBDASR002	23038	5CD437FC(	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[967] BRAC Learning and Leadership Developr				IN_USE	UNASSIGNED	
15	BBDASR002	23037	5CD437FC'	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[099] BRAC	[018] HRD			IN_USE	UNASSIGNED	
16	BBDASR002	23036	5CD437FC'	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[099] BRAC	[018] HRD			IN_USE	UNASSIGNED	
17	BBDASR002	23035	5CD437FC'	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[099] BRAC	[018] HRD			IN_USE	UNASSIGNED	
18	BBDASR002	23034	5CD437FC'	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[099] BRAC	[018] HRD			IN_USE	UNASSIGNED	
19	BBDASR00223033		5CD437FC'	Laptop	Laptop	Laptop	Computer/	27/11/2025	30/11/2025	[099] BRAC	[018] HRD			IN_USE	UNASSIGNED	
20	BBDASR00223032		S7ABMF00'	Mini Comp	Computer	Computer	Computer/	26/11/2025	30/11/2025	[1363] Sir Fazle Hasan Abed-Knowledge Hub F				IN_USE	UNASSIGNED	

Figure: Asset List Report

25.2.8. Requirements:

- Asset Serial column will always show parent asset serial number.
- Extended Asset serial will not be shown in this report.

25.2.9. Assumptions:

- N/A

25.2.10. Non-functional Requirements:

- N/A

25.2.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.2.12. Exceptions:

- N/A

25.3. Asset Register Report | F25S03 | <Story JIRA ID>

25.3.1. User Story:

As an authorized user, I want to view the Asset Register Report so that I can view the Asset Register report as per selected criteria.

25.3.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Register Report.

25.3.3. Actors:

- Authorized user.

25.3.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.3.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.3.6. Impacted Areas:

- Asset Register Report

25.3.7. Mock-up/ Prototypes:

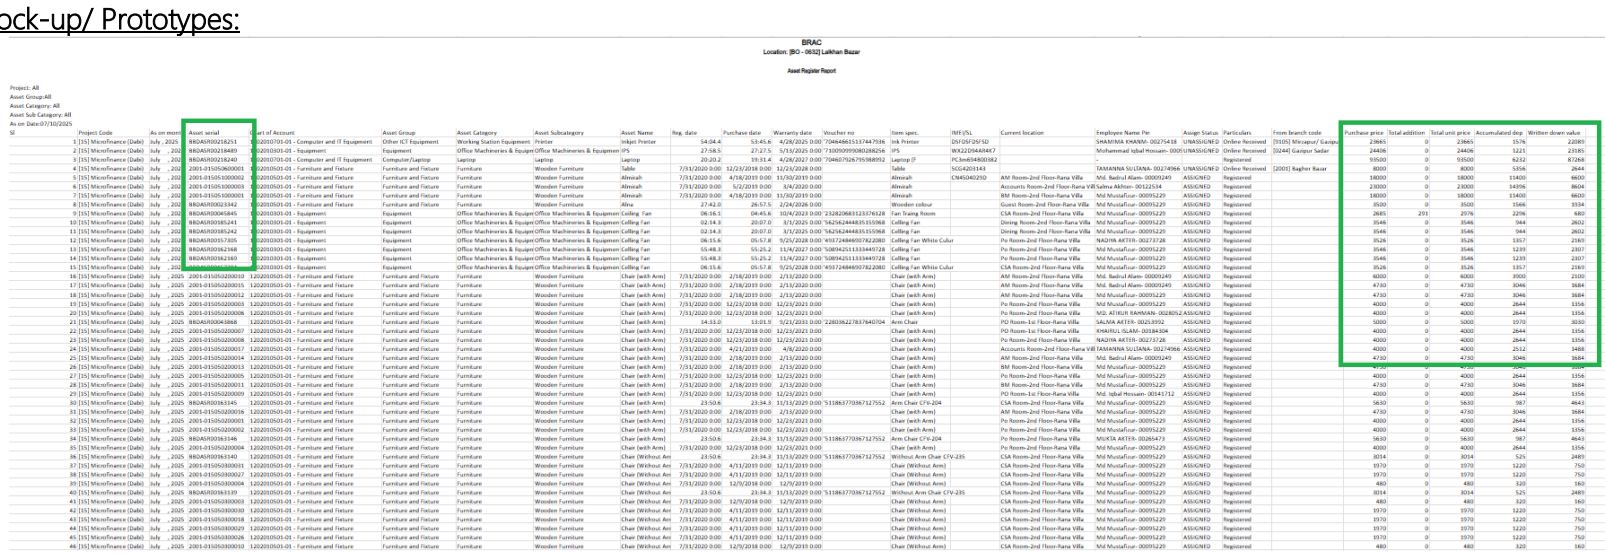


Figure: Asset Register Report

25.3.8. Requirements:

The following column values in the Asset Register Report will be updated as part of the new parent–extended asset handling logic:

- Asset Serial: The Asset Serial column will always display the Parent Asset Serial.
- Total Addition: The Total Addition column will represent the combined purchase value of all extended assets under the parent asset.
- Total unit price: System will show the total unit price of the Fixed Asset. Formula: Purchase Price + Total Addition.
- Accumulated Depreciation: The Accumulated Depreciation column will show the aggregated accumulated depreciation of both the parent asset and all associated extended assets.
- Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values.

25.3.9. Assumptions:

- N/A

25.3.10. Non-Functional Requirement

- N/A

25.3.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.3.12. Exceptions:

- N/A

25.4. Asset Schedule Report | F25S04 | <Story JIRA ID>

25.4.1. User Story:

As an authorized user, I want to view the Asset Schedule Report so that I can view the Asset Schedule report as per selected criteria.

25.4.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Schedule Report.

25.4.3. Actors:

- Authorized user.

25.4.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.4.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.4.6. Impacted Areas:

- Asset List Report

25.4.7. Mock-up/ Prototypes:

BRAC
Location: [BO - 0544] Naogaon Sadar
Fixed Asset Schedule Report

Project: Microfinance (Debi) [15]
From Date: 01/07/2025
To Date: 31/07/2025

S/N	Group of Fixed Asset	Cost Value						Depreciation						Written down value
		Opening Balance	Additions During The Period	Received Another Branch/Project	Transfer Another Branch/Project	Disposals During The Period	Closing Balance	Opening Balance	Charged During The Period	Receive Another Project/Branch	Transfer Another Project/Branch	Disposal During The Period	Closing balance	
1	Bicycles	13,000	-	-	-	-	13,000	12,998	-	-	-	-	12,998	-
2	Building	3,400,592,861	-	-	-	-	3,400,592,861	1,379,329,998	8,075,010	-	-	-	1,387,405,008	2,013,187,85
3	Computer/Laptop	345,595,864	398,747	2,169,132	1,998,479	1,701,782	344,463,482	278,561,170	4,386,681	1,599,265	1,406,449	1,668,450	279,872,932	64,590,55
4	Electrical & Electronics	358,870	-	-	-	-	358,870	81,660	5,981	-	-	-	87,641	271,22
5	Equipment	314,919,587	1,942,792	1,058,236	503,113	293,363	317,124,139	196,193,634	3,831,466	669,914	217,950	276,413	199,530,737	117,593,40
6	Furniture and Fixture	959,133,898	1,891,491	3,683,493	1,588,859	872,924	962,047,099	571,025,314	8,535,198	2,323,081	890,240	749,680	577,920,592	384,126,50
7	Land	331,189,037	1,014,540	-	-	77,686	332,125,891	-	-	-	-	-	-	332,125,8
8	Mobile & Mobile Devices	54,788,278	-	251,710	371,214	969,160	53,699,614	55,122,466	275,868	251,694	371,195	969,097	54,058,042	(358,42
9	Motorcycles	10,495	-	-	-	-	10,495	10,494	-	-	-	-	10,494	-
10	Other ICT Equipment	106,366,465	2,498,406	469,923	396,550	936,891	108,001,553	70,886,116	1,429,343	192,482	140,600	823,971	71,352,888	36,648,66
11	Plant & Machinery	159,890,114	39,784	1,177,194	1,173,193	124,100	159,809,799	144,926,269	1,897,034	1,147,948	1,143,946	124,097	145,555,260	14,254,53
12	Semi Pucca Building	5,060,821	-	-	-	-	5,060,821	436,021	21,087	-	-	-	457,108	4,603,71
13	Vehicles	6,054,223	-	-	-	-	6,054,223	6,054,222	-	-	-	-	6,054,222	-
	Grand Total	5,683,973,313	7,585,760	8,809,688	6,031,408	4,975,706	5,689,361,647	2,702,642,362	28,457,648	6,184,384	4,170,380	4,611,708	2,722,317,922	2,967,043,72

Figure: Asset Schedule Report

25.4.8. Requirements:

The following column values in the report will be updated as part of the new parent–extended asset handling logic:

- Cost Value: Under cost value heading following individuals will change
  i. Additions During the Period: The system will show the combined purchase value of all extended assets under the respective parent asset group.
  ii. Received from Branch/Project: The system will display the total value of parent and extended assets received from other branches or projects
  iii. Transfer to Branch/Project: The system will display the total value of parent and extended assets transferred out to other branches or projects
  iv. Disposals During the Period: This value represents the combined disposal value of the parent and all extended assets under each asset group
  v. Closing Balance: System will show the closing balance of the selected period in this column against each Fixed Asset group. Calculation: Opening Balance + Additions During the Period + Received from Branch/Project – Transfer to Branch/Project – Disposal During the Period.
- Depreciation: Under depreciation value heading following individuals will change
  i. Charged During the Period: The system will show the total depreciation charged during the selected period for the parent asset and all extended assets under the asset group.
  ii. Received from Branch/Project: The system will show the combined accumulated depreciation (parent + extended) for assets received from other branches.
  iii. Transfer to Branch/Project: The system will show the combined accumulated depreciation (parent + extended) for assets transferred out
  iv. Disposals During the Period: System will show the sum of Accumulated Depreciation of the Fixed Asset in each Asset Group that has been Disposed using Disposal Sale, Fixed Asset Write Off, and Backend Support Sale/ Write-Off.
  v. Closing Balance: System will show the closing balance of the selected period in this column against each Fixed Asset group. Calculation: Opening Balance + Charged during the Period + Received from Branch/Project – Transfer to Branch/Project – Disposal During the Period.

25.4.9. Assumptions:

- N/A

25.4.10. Non-functional Requirements:

- N/A

25.4.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.4.12. Exceptions:

- N/A

25.5. Asset Disposal Sale Report | F25S05 | <Story JIRA ID>

25.5.1. User Story:

As an authorized user, I want to view the Asset Disposal Sale Report so that I can view the Asset Disposal Sale report as per selected criteria.

25.5.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Disposal Sale Report.

25.5.3. Actors:

- Authorized user.

25.5.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  - i. Report will display the Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  - ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group during parent asset sale. For child asset respective value will be shown.

27.3.1. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.5.5. Impacted Areas:

- Asset Disposal Sale Report

25.5.6. Mock-up/ Prototypes:

BRAC
Location: [BO - 0605] Gulshan
Asset Disposal Sale Report

From Date: 01/01/2025 **To Date: 07/10/2025**

SL	Project Code	Project Name	Asset Serial	Asset Name	Sub Category	Category	Group	Item Spec.	IMEI/SL	Present Condition	Sale Date	Total Unit Price	Written Down Value	Sale Price	Gain/Loss	Sale Proceeds Status	Note /Remarks
1	15	Microfinance (Dabi)	BDHO-0015-000490	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	27/08/2025	71462	53596	71462	17866	Profit	Sr. Director TAB Sale
2	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00109539	Tablet	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17200	1	100	99	Profit	
3	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00109468	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17200	1	100	99	Profit	
4	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00109467	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17200	1	100	99	Profit	
5	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00109466	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17200	1	100	99	Profit	
6	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00086574	Tablet	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17989	1	100	99	Profit	
7	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00071948	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17200	1	100	99	Profit	
8	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00065260	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	15530	1	100	99	Profit	
9	1155	The Ultra Poor Graduation (UPG) Programme	BBDASR00016717	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17200	1	100	99	Profit	
10	1155	The Ultra Poor Graduation (UPG) Programme	0606-553230100001	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	17450	1	100	99	Profit	
11	1155	The Ultra Poor	0371-553230100006	TAB	Mobile & Mobile Devices	Mobile & Mobile Devices				Sale	17/03/2025	22933	1	100	99	Profit	

Figure: Asset Disposal Sale Report

25.5.7. Requirements:

The following column values in the Asset Disposal Sale Report will be updated as part of the new parent–extended asset handling logic:

- Asset Serial: The Asset Serial column will always display the Parent Asset Serial while aggregated asset will be sold. When individual child asset will be sold then it will show child asset's serial number.
- Total unit price: System will show the total unit price of the Fixed Asset. Formula for parent asset: Purchase Price + Total Addition (combined purchase value of all extended assets). For child asset only its own purchase price will be shown.
- Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values while asset will be sold on aggregated. But for child asset it will be shown only child asset written down value.
- Sale Price: The amount at which the Fixed Asset has been sold.
- Gain/Loss: System will show the amount of gain/loss that has occurred due to disposal processes. Gain/Loss= Sale Price - Written Down Value.

25.5.8. Assumptions:

- N/A

25.5.9. Non-functional Requirements:

- N/A

25.5.10. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.5.11. Exceptions:

- N/A

25.6. Asset Write off & Offline Transfer Report | F25S06 | <Story JIRA ID>

25.6.1. User Story:

As an authorized user, I want to view the Asset Write-off & Offline Transfer Report so that I can view the Asset Write-off & Offline transfer report as per selected criteria.

25.6.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Write-off & Offline Transfer Report.

25.6.3. Actors:

- Authorized user.

25.6.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group during parent asset write-off. For child asset respective value will be shown.

25.6.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.6.6. Impacted Areas:

- Asset Write-off & Offline Transfer Report

25.6.7. Mock-up/ Prototypes:

BRAC
Location:[BO - 0605] Gulshan

Asset Disposal Write-off & Offline Transfer Report

From Date: 01/05/2025 To Date: 30/08/2025

SL	Project Code	Project Name	Asset Serial	Asset Name	Sub Category	Category	Group	Item Spec.	IMEI/SL	Present Condition	Write-off Approval Date	Total Unit Price	Written Down Value	Accumulated Depreciation	Note /Remarks
1	60	Progoti	BBDASR00141527	Desktop Computer	Computer	Computer				DONATED	6/5/2025	1	1	0	Donated
2	15	Microfinance (Dabi)	0394-060090100008	Desktop Computer	Computer	Computer				DONATED	25/08/2025	54700	1	54699	Ownership Transfer
3	15	Microfinance (Dabi)	0543-015090100101	Desktop Computer	Computer	Computer				DONATED	24/05/2025	55900	1	55899	Donated
											Grand Total	110601	3	110598	

Figure: Asset Write-off & Offline Transfer Report

25.6.8. Requirements:

The following column values in the Asset Write-off & Offline transfer Report will be updated as part of the new parent–extended asset handling logic:

- Asset Serial: The Asset Serial column will always display the Parent Asset Serial while aggregated asset will be write-off. When individual child asset will be write-off then it will shown child asset's serial number.
- Total unit price: System will show the total unit price of the Fixed Asset. Formula: Purchase Price + Total Addition (combined purchase value of all extended assets). For child asset only its own purchase price will be shown.
- Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values while asset will be written on s aggregated. But for child asset it will be shown only child asset written down value.
- Sale Price: The amount at which the Fixed Asset has been sold.
- Accumulated Depreciation: The Accumulated Depreciation column will show the aggregated accumulated depreciation of both the parent asset and all associated extended assets. But for child asset it will be shown only child asset Accumulated depreciation value.

25.6.9. Assumptions:

- N/A

25.6.10. Non-functional Requirements:

- N/A

25.6.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.6.12. Exceptions:

- N/A

25.7. Asset Valuation Report | F25S07 | <Story JIRA ID>

25.7.1. User Story:

As an authorized user, I want to view the Asset Valuation Report so that I can view the Asset Valuation report as per selected criteria.

25.7.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Valuation Report.

25.7.3. Actors:

- Authorized user.

25.7.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.7.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.7.6. Impacted Areas:

- Asset Valuation Report

25.7.7. Mock-up/ Prototypes:

BRAC

Location: [HO - BDHO] Head Office

Asset Valuation Report

Project: [015] Microfinance (Dabi) | Department: All | Source of Fund: All | As on Date: 12/08/2025

SL	Group	Category	Total Asset	Purchase Price	Total Addition	Total Unit Price	Accumulated Depreciation	Written Down Value
1	Electrical & Electronics	Electrical &	57	2336123.00	0.00	2336123.00	2154441.00	181682.00
2	Furniture and Fixture	Furniture	261	1909695.00	0.00	1909695.00	378093.00	1531602.00
3	Other ICT Equipment	Data Center Equipment	3	14340.00	0.00	14340.00	7677.00	6663.00
4	Other ICT Equipment	Telecom Equipment	3	18725848.00	0.00	18725848.00	18725845.00	3.00
5	Other ICT Equipment	Working Station Equipment	17	393791.00	0.00	393791.00	389412.00	4379.00
6	Plant & Machinery	Industrial & Factory	2	4780.00	0.00	4780.00	4778.00	2.00
7	Plant & Machinery	Industrial Machineries & Equipment	1	3499700.00	0.00	3499700.00	3499699.00	1.00
8	Vehicles	Motor Vehicles	61	288444728.00	0.00	288444728.00	171267223.00	117177505.00
9	Land	Land	420	7138279683.00	0.00	7138279683.00	0.00	7138279683.00
10	Building	Building	3	18393042.00	0.00	18393042.00	10384449.00	8008593.00
11	Computer/Laptop	Computer	99	2124590.00	0.00	2124590.00	1573172.00	551418.00
12	Computer/Laptop	Laptop	480	45555679.00	0.00	45555679.00	27528272.00	18027407.00
13	Mobile & Mobile Devices	Mobile & Mobile Devices	72	3184120.00	0.00	3184120.00	1690735.00	1493385.00
14	Local Software	Readymade Software	15	777731673.00	0.00	777731673.00	216486083.00	561245590.00
15	Equipment	Office Machineries & Equipment	75	7072818.00	0.00	7072818.00	5541477.00	1531341.00
		Grand Total	**1569**	**8307670610.00**	**0.00**	**8307670610.00**	**459631356.00**	**7848039254.00**

Figure: Asset Valuation Report

25.7.8. Requirements:

The following column values in the Asset Valuation Report will be updated as part of the new parent–extended asset handling logic:

- Purchase Price: System will show the total purchase price of all parent asset under the asset group.
- Total Addition: The Total Addition column will represent the combined purchase value of all extended assets under the parent asset of asset group.
- Total unit price: System will show the total unit price of the Fixed Asset for asset groups. Formula: Purchase Price + Total Addition.
- Accumulated Depreciation: The Accumulated Depreciation column will show the aggregated accumulated depreciation of both the parent asset and all associated extended assets for specific asset groups.
- Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values for asset groups.

25.7.9. Assumptions:

- N/A

25.7.10. Non-functional Requirements:

- N/A

25.7.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.7.12. Exceptions:

- N/A

25.8. Asset Transaction History Report | F25S08 | <Story JIRA ID>

25.8.1. User Story:

As an authorized user, I want to view the Asset Transaction History Report so that I can view the Asset Transaction History report as per selected criteria.

25.8.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Transaction History Report.

25.8.3. Actors:

- Authorized user.

25.8.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  - i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  - ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.8.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.8.6. Impacted Areas:

- Asset Transaction History Report

25.8.7. Mock-up/ Prototypes:

BRAC

Location: [HO - BDHO] Head Office

Transaction History

Asset Group: All Asset Category: All Asset Sub Category: All As on Date: 01/12/2025

From Date: 01/01/2025 To Date: 01/12/2025

SL	Asset Serial	Asset Name	Approval Date	Transaction Type	Employee Name & PIN	Project	Department	Current Location	Utilization Status	Assign Status
1	BDHO-0679-000001	TAB	30/06/2025	UNASSIGN	-	[679] Mothers at Work			DAMAGE	UNASSIGNED
2	0100-015090100154	Desktop Computer	02/09/2025	ASSIGN	Samir Baran Bhuiyan-00002122	[015] Microfinance (Dabi)			IN_USE	UNASSIGNED

Figure: Asset Transaction History Report

25.8.8. Requirements:

- Asset Serial column will always show parent asset serial number

25.8.9. Assumptions:

- N/A

25.8.10. Non-functional Requirements:

- N/A

25.8.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.8.12. Exceptions:

- N/A

25.9. Asset Receivable Report | F25S09 | <Story JIRA ID>

25.9.1. User Story:

As an authorized user, I want to view the Asset Receivable Report so that I can view the Asset Receivable report as per selected criteria.

25.9.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Receivable Report.

25.9.3. Actors:

- Authorized user.

25.9.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.9.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.9.6. Impacted Areas:

- Asset Receivable Report

25.9.7. Mock-up/ Prototypes:

BRAC
Location: [BO - 0605] Gulshan

List of Receivable Asset

As on Date: 02/12/2025

SL	Asset Serial	Asset Name	Sender Project	Sender Department	Receiver Branch	Receiver Project	Receiver Department	Out Challan Number	Sending Date	Approx. Return Date	Actual Return Date
1	BBDASR00212592	Laptop	[015] Microfinance (Dabi)		[BO - 0289] Singair	[015] Microfinance (Dabi)		OC-71745	02/09/2025	21/09/2025	30/09/2025

Figure: Asset Receivable Report

25.9.8. Requirements:

- Asset Serial column will always show parent asset serial number

25.9.9. Assumptions:

- N/A

25.9.10. Non-functional Requirements:

- N/A

25.9.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.9.12. Exceptions:

- N/A

25.10. Asset Returnable Report | F25S10 | <Story JIRA ID>

25.10.1. User Story:

As an authorized user, I want to view the Asset Returnable Report so that I can view the Asset Returnable Report as per selected criteria.

25.10.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Returnable Report.

25.10.3. Actors:

- Authorized user.

25.10.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.10.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.10.6. Impacted Areas:

- Asset Returnable Report

25.10.7. Mock-up/ Prototypes:

BRAC

Location: [BO - 0605] Gulshan

List of Receivable Asset

As on Date: 02/12/2025

SL	Asset Serial	Asset Name	Sender Project	Sender Department	Receiver Branch	Receiver Project	Receiver Department	Out Challan Number	Sending Date	Approx. Return Date	Actual Return Date
1	BBDASR00212592	Laptop	[015] Microfinance (Dabi)		[BO - 0289] Singair	[015] Microfinance (Dabi)		OC-71745	02/09/2025	21/09/2025	30/09/2025

Figure: Asset Returnable Report

25.10.8. Requirements:

- Asset Serial column will always show parent asset serial number

25.10.9. Assumptions:

- N/A

25.10.10. Non-functional Requirements:

- N/A

25.10.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.10.12. Exceptions:

- N/A

25.11. Asset Tracking Report | F25S11 | <Story JIRA ID>

25.11.1. User Story:

As an authorized user, I want to view the Asset Tracking Report so that I can view the Asset Tracking Report as per selected criteria.

25.11.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Tracking Report.

25.11.3. Actors:

- Authorized user.

25.11.4. Scope:

- **Current Scope:** Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- **New Scope:**
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.11.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.11.6. Impacted Areas:

- Asset List Report

25.11.7. Mock-up/ Prototypes:


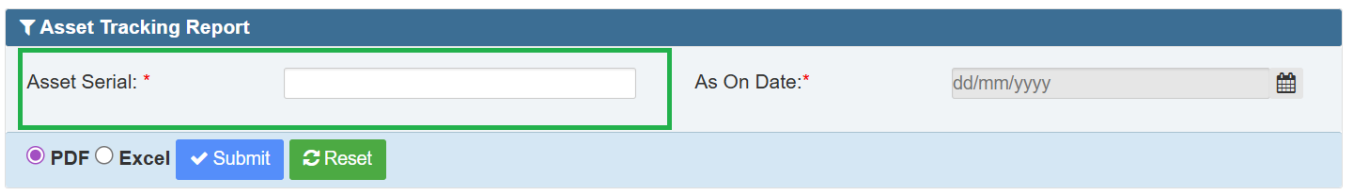


Figure: Asset Tracking Report UI

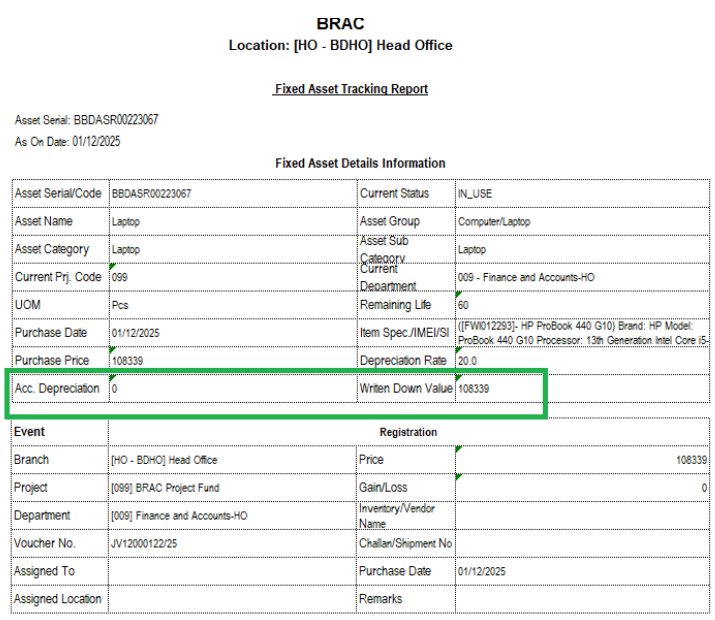

BRAC
Location: [HO - BDHO] Head Office

Fixed Asset Tracking Report

Asset Serial: BBDASR00223067
As On Date: 01/12/2025

Fixed Asset Details Information

Asset Serial/Code	BBDASR00223067	Current Status	IN_USE
Asset Name	Laptop	Asset Group	Computer/Laptop
Asset Category	Laptop	Asset Sub Category	Laptop
Current Prj. Code	099	Current Department	009 - Finance and Accounts-HO
UOM	Pcs	Remaining Life	60
Purchase Date	01/12/2025	Item Spec./IMEI/Sl	([FW012293]- HP ProBook 440 G10) Brand: HP Model: ProBook 440 G10 Processor: 13th Generation Intel Core i5-
Purchase Price	108339	Depreciation Rate	20.0
Acc. Depreciation	0	Written Down Value	108339

Event	Registration		
Branch	[HO - BDHO] Head Office	Price	108339
Project	[099] BRAC Project Fund	Gain/Loss	0
Department	[009] Finance and Accounts-HO	Inventory/Vendor Name	
Voucher No.	JV12000122/25	Challan/Shipment No	
Assigned To		Purchase Date	01/12/2025
Assigned Location		Remarks	

Figure: Asset Tracking Report

25.11.8. Requirements:

1. The following column values in the Asset Tracking Report will be updated as part of the new parent–extended asset handling logic:
   - **Asset Serial:** The Asset Serial column will always display the Parent Asset Serial in both UI and report details.
   - **Total unit price:** System will show the total unit price of the Fixed Asset. Formula: Purchase Price + Total Addition.
   - **Accumulated Depreciation:** The Accumulated Depreciation column will show the aggregated accumulated depreciation of both the parent asset and all associated extended assets.
   - **Written Down Value:** The Written Down Value column will present the total written-down value, combining parent and extended asset values.
2. Addition impact will be shown in the tracking report under event section for each addition.

25.11.9. Assumptions:

- N/A

25.11.10. Non-functional Requirements:

- N/A

25.11.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.11.12. Exceptions:

- N/A

25.12. Asset Registration Report | F25S12 | <Story JIRA ID>

25.12.1. User Story:

As an authorized user, I want to view the Asset Registration Report so that I can view the Asset Registration Report as per selected criteria.

25.12.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Registration Report.

25.12.3. Actors:

- Authorized user.

25.12.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.12.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.12.6. Impacted Areas:

- Asset Register Report

25.12.7. Mock-up/ Prototypes:

Location:	[HO - BDHO] Head Office
Project:	All
Department:	All
Source of Fund:	All
Asset Group:	All
Asset Category:	All
Asset Sub Category:	All
From Date:	01-01-25
To Date:	01-12-25

SL	Reg. Date	Reg. Ty	Particulars	Voucher Numb	Asset Serial	Asset Name	Current Lo	Purchase Date	Purchase Price	Cost Value	Total Addition	Total Unit Price	Total Expense	Accumulated Dep.	Written Down Value	Utilization Status
1	01-12-25	MRR	793-BPD/2025/FO-4415	JV12000122/25	BBDASR00223067	Laptop		01-12-25	108339.45			108339.45			108339.45	N_USE
2	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223050	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
3	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223049	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
4	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223048	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
5	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223047	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
6	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223046	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
7	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223045	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
8	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223044	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
9	30-11-25	MRR	DEL/2025-20257897-BPD/2025/FO-500	JV11012902/25	BBDASR00223043	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
10	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012611/25	BBDASR00223042	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
11	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012611/25	BBDASR00223041	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
12	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012611/25	BBDASR00223040	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	N_USE
13	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012611/25	BBDASR00223039	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE
14	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012611/25	BBDASR00223038	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE
15	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012605/25	BBDASR00223037	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE
16	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012605/25	BBDASR00223036	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE
17	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012605/25	BBDASR00223035	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE
18	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012605/25	BBDASR00223034	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE
19	30-11-25	MRR	DEL/2025-20257070-BPD/2025/FO-229	JV11012605/25	BBDASR00223033	Laptop		27-11-25	108339.45			108339.45		1806	106533.45	IN_USE

Figure: Asset Registration Report

25.12.8. Requirements:

The following column values in the Asset Registration Report will be updated as part of the new parent–extended asset handling logic:

- Asset Serial: The Asset Serial column will always display the Parent Asset Serial.
- Total Addition: The Total Addition column will represent the combined purchase value of all extended assets under the parent asset.
- Total unit price: System will show the total unit price of the Fixed Asset. Formula: Purchase Price + Total Addition.
- Accumulated Depreciation: The Accumulated Depreciation column will show the aggregated accumulated depreciation of both the parent asset and all associated extended assets.
- Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values.

25.12.9. Assumptions:

- N/A

25.12.10. Non-functional Requirements:

- N/A

25.12.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.12.12. Exceptions:

- N/A

25.13. Asset Depreciation Statement (Serial wise) | F25S13 | <Story JIRA ID>

25.13.1. User Story:

As an authorized user, I want to view the Asset Depreciation Statement Serial Wise Report so that I can view the Asset Depreciation Statement Serial Wise as per selected criteria.

25.13.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Depreciation Statement Serial Wise

25.13.3. Actors:

- Authorized user.

25.13.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.13.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.13.6. Impacted Areas:

- Asset Depreciation Statement Serial Wise

25.13.7. Mock-up/ Prototypes:

BRAC
Location: [BO - 0605] Gulshan

Asset Depreciation Statement (Serial Wise) Report

Project : All
Source of Fund : All
From Date: 01/01/2020 To Date : 01/12/2025

SL	Asset Serial	Asset Name	Cost					Total Expense	Dep. Rate	Depreciation					WDV
			Opening	Purchase	Receive	Addition	Disposal	Total			Opening	Charge	Receive	Disposal	Total	
1	BBDASR00222414	Refrigerator	0.00	44400.00	0.00	0.00	0.00	44400.00	0.00	20.00	0.00	740.00	0.00	0.00	740.00	43660.00
2	BBDASR00222253	Laptop	0.00	94651.00	0.00	0.00	0.00	94651.00	0.00	20.00	0.00	4733.00	0.00	0.00	4733.00	89918.00
3	BBDASR00222252	Laptop	0.00	94651.00	0.00	0.00	0.00	94651.00	0.00	20.00	0.00	4733.00	0.00	0.00	4733.00	89918.00
4	BBDASR00221202	Multifunction Color Printer-01	0.00	37919.00	0.00	0.00	0.00	37919.00	0.00	20.00	0.00	1896.00	0.00	0.00	1896.00	36023.00
5	BBDASR00220760	Monitor	0.00	1.00	0.00	0.00	0.00	1.00	0.00	20.00	0.00	0.00	0.00	0.00	0.00	1.00
6	BBDASR00220747	Laptop	0.00	1.00	0.00	0.00	0.00	1.00	0.00	20.00	0.00	0.00	0.00	0.00	0.00	1.00
7	BBDASR00220746	Laptop	0.00	1.00	0.00	0.00	0.00	1.00	0.00	20.00	0.00	0.00	0.00	0.00	0.00	1.00
8	BBDASR00218987	Laser Printer	0.00	34486.00	0.00	0.00	0.00	34486.00	0.00	20.00	0.00	3450.00	0.00	0.00	3450.00	31036.00
9	BDHO-0015-000490	TAB	0.00	0.00	71462.00	0.00	71462.00	0.00	0.00	50.00	0.00	0.00	17866.00	17866.00	0.00	0.00
10	BBDASR00218525	Laptop	0.00	93500.00	0.00	0.00	93500.00	0.00	0.00	20.00	0.00	0.00	0.00	0.00	0.00	0.00
11	BBDASR00218168	Laptop	0.00	93500.00	0.00	0.00	93500.00	0.00	0.00	20.00	0.00	1558.00	0.00	1558.00	0.00	0.00
12	BBDASR00218167	Laptop	0.00	93500.00	0.00	0.00	93500.00	0.00	0.00	20.00	0.00	1558.00	0.00	1558.00	0.00	0.00
13	BBDASR00215224	Mobile Phone Set (Samsung)	0.00	25850.00	0.00	0.00	0.00	25850.00	0.00	50.00	0.00	21540.00	0.00	0.00	21540.00	4310.00
14	BBDASR00215026	32" Monitor With wall mount stand.	0.00	30267.00	0.00	0.00	0.00	30267.00	0.00	20.00	0.00	6555.00	0.00	0.00	6555.00	23712.00
15	BBDASR00214854	Network Printer	0.00	34513.00	0.00	0.00	0.00	34513.00	0.00	20.00	0.00	7475.00	0.00	0.00	7475.00	27038.00
16	BBDASR00214725	Network Printer	0.00	34500.00	0.00	0.00	0.00	34500.00	0.00	20.00	0.00	7475.00	0.00	0.00	7475.00	27025.00
17	BBDASR00214636	Fridge/Refrigerator	0.00	41948.00	0.00	0.00	0.00	41948.00	0.00	20.00	0.00	9786.00	0.00	0.00	9786.00	32162.00
18	BBDASR00214561	Cash Counting Machine	0.00	118181.00	0.00	0.00	0.00	118181.00	0.00	20.00	0.00	51905.00	0.00	0.00	51905.00	67115.00

Figure: Asset Depreciation Statement Serial Wise

25.13.8. Requirements:

The following column values in the report will be updated as part of the new parent–extended asset handling logic:

- Asset Serial: The Asset Serial column will always display the Parent Asset Serial.
- Cost Value: Under cost value heading following individuals will change
  i. Addition: The system will show the combined purchase value of all extended assets under the respective parent asset.
  ii. Received: The system will display the total value of parent and extended assets received from other branches or projects
  iii. Disposals: This value represents the combined disposal value of the parent and all extended assets under each asset.
  iv. Total: System will show the closing balance of the selected period in this column against each Fixed Asset. Calculation: Opening Balance + Additions During the Period + Received from Branch/Project – Disposal During the Period.
- Depreciation: Under depreciation value heading following individuals will change
  i. Charge: The system will show the total depreciation charged during the selected period for the parent asset and all extended assets under the parent asset.
  ii. Receive: The system will show the combined accumulated depreciation (parent + extended) for assets received from other branches.
  iii. Disposal: System will show the sum of Accumulated Depreciation of the Fixed Asset that has been Disposed using Disposal Sale, Fixed Asset Write Off, and Backend Support Sale/ Write-Off.
  iv. Total: System will show the closing balance of the selected period in this column against each Fixed Asset. Calculation: Opening Balance + Charged during the Period + Received from Branch/Project –Disposal During the Period.
  v. Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values.

25.13.9. Assumptions:

- N/A

25.13.10. Non-functional Requirements:

- N/A

25.13.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.13.12. Exceptions:

- N/A

25.14. Asset Depreciation Statement (Group wise) | F25S14 | <Story JIRA ID>

25.14.1. User Story:

As an authorized user, I want to view the Asset Depreciation Statement Serial Wise Report so that I can view the Asset Depreciation Statement Serial Wise as per selected criteria.

25.14.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Depreciation Statement Group Wise

25.14.3. Actors:

- Authorized user.

25.14.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  - i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  - ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.14.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.14.6. Impacted Areas:

- Asset Depreciation Statement Group Wise

25.14.7. Mock-up/ Prototypes:

BRAC

Location: [HO - BDHO] Head Office

Asset Depreciation Statement (Group Wise) Report

Project : All
Department : All
Source of Fund : All
From Date : 01/01/2025 To Date: 01/12/2025

SL	Group Name	Cost						Total Expense	Dep. Rate	Depreciation					WDV
		Opening	Purchase	Receive	Addition	Disposal	Total			Opening	Charge	Receive	Disposal	Total	
1	Bicycles	0.00	1044741.00	0.00	0.00	0.00	1044741.00	0.00	20.00	0.00	1033645.00	0.00	0.00	1033645.00	11096.00
2	Building	0.00	1983918259.00	24435992.00	0.00	0.00	2008354251.00	0.00	2.50	0.00	480600938.00	0.00	0.00	480600938.00	15277533 13.00
3	Computer/Laptop	0.00	420607573.45	20720704.00	0.00	33384999.00	407943278.45	0.00	20.00	0.00	234858544.00	14889128.00	21738930.00	228006742.00	179934535.45
4	Electrical & Electronics	0.00	5027227.52	0.00	0.00	0.00	5027227.52	0.00	20.00	0.00	2762005.00	0.00	0.00	2762005.00	2265222.52
5	Equipment	0.00	599962430.87	19705320.00	0.00	22421993.00	597245757.87	0.00	20.00	0.00	414289780.00	12573495.00	14424479.00	412438796.00	184806961.87
6	Furniture and Fixture	0.00	52539753.06	653842.00	0.00	655314.00	52538281.06	0.00	10.00	0.00	22818734.00	1655695.00	286677.00	22697752.00	29840529.06
7	Land	0.00	9191713460.00	0.00	0.00	845982.00	9190867478.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	91908674 78.00
8	Local Software	0.00	661044020.67	184617886.00	0.00	184617886.00	661044020.67	0.00	20.00	0.00	194522715.00	42492097.00	42492097.00	194522715.00	46652130 5.67
9	Mobile & Mobile Devices	0.00	30487031.95	1661002.00	0.00	3368442.00	28779591.95	0.00	50.00	0.00	20846136.00	1604623.00	3202074.00	19246685.00	9530906.95
10	Motorcycles	0.00	2255280.00	0.00	0.00	0.00	2255280.00	0.00	20.00	0.00	1453094.00	0.00	0.00	1453094.00	802186.00
11	Other ICT Equipment	0.00	148625536.00	4911927.00	0.00	6567649.00	146969814.00	0.00	20.00	0.00	91171081.00	2807888.00	3730281.00	90246688.00	56721126.00
12	Plant & Machinery	0.00	4108413.00	544833.00	0.00	544833.00	4108413.00	0.00	20.00	0.00	3852494.00	236106.00	236106.00	3852494.00	255919.00
13	Vehicles	0.00	1179075468.00	5083193.00	0.00	24411442.00	1159747219.00	0.00	20.00	0.00	875508691.00	5083191.00	24411432.00	856180450.00	303566769.00
	Grand Total	**0.00**	**14280409194.52**	**262334699.00**	**0.00**	**276810540.00**	**14265925353.52**	**0.00**		**0.00**	**2343717857.00**	**79852223.00**	**110522076.00**	**2313048004.00**	**11952877349.52**

Figure: Asset Depreciation Statement Group Wise

25.14.8. Requirements:

The following column values in the report will be updated as part of the new parent–extended asset handling logic:

- Cost Value: Under cost value heading following individuals will change
  - v. Addition: The system will show the combined purchase value of all extended assets under the respective parent asset group.
  - vi. Received: The system will display the total value of parent and extended assets received from other branches or projects
  - vii. Disposals: This value represents the combined disposal value of the parent and all extended assets under each asset group
  - viii. Total: System will show the closing balance of the selected period in this column against each Fixed Asset group. Calculation: Opening Balance + Additions During the Period + Received from Branch/Project – Disposal During the Period.
- Depreciation: Under depreciation value heading following individuals will change
  - vi. Charge: The system will show the total depreciation charged during the selected period for the parent asset and all extended assets under the asset group.
  - vii. Receive: The system will show the combined accumulated depreciation (parent + extended) for assets received from other branches.
  - viii. Disposal: System will show the sum of Accumulated Depreciation of the Fixed Asset in each Asset Group that has been Disposed using Disposal Sale, Fixed Asset Write Off, and Backend Support Sale/ Write-Off.
  - ix. Total: System will show the closing balance of the selected period in this column against each Fixed Asset group. Calculation: Opening Balance + Charged during the Period + Received from Branch/Project –Disposal During the Period.
  - x. Written Down Value: The Written Down Value column will present the total written-down value, combining parent and extended asset values for the asset group.

25.14.9. Assumptions:

- N/A

25.14.10. Non-functional Requirements:

- N/A

25.14.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.14.12. Exceptions:

- N/A

25.15. Asset Depreciation History (Serial wise) | F25S15 | <Story JIRA ID>

25.15.1. User Story:

As an authorized user, I want to view the Asset Depreciation History Serial Wise Report so that I can view the Asset Depreciation History Serial Wise as per selected criteria.

25.15.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Depreciation History Serial Wise

25.15.3. Actors:

- Authorized user.

25.15.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  - i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  - ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.15.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.15.6. Impacted Areas:

- Asset Depreciation History Serial Wise

25.15.7. Mock-up/ Prototypes:

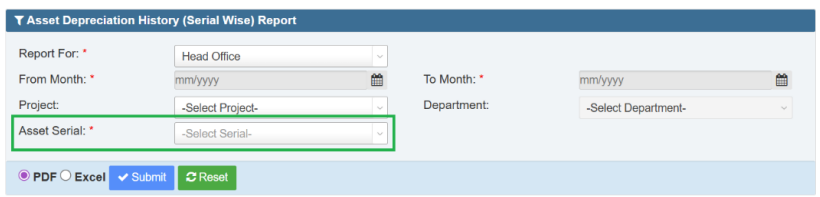
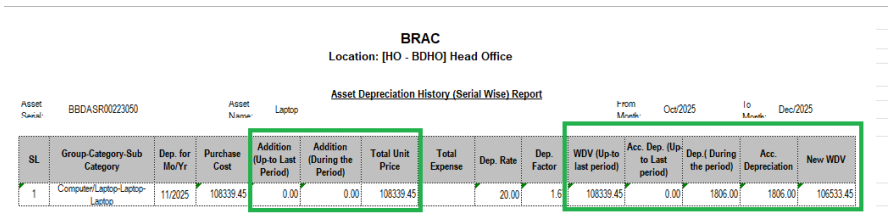


Figure: Asset Depreciation history Serial Wise UI


BRAC

Location: [HO - BDHO] Head Office

Asset Depreciation History (Serial Wise) Report

Asset Serial: BBDASR00223050 Asset Name: Laptop From Month: Oct/2025 To Month: Dec/2025

SL	Group-Category-Sub Category	Dep. for Mo/Yr	Purchase Cost	Addition (Up-to Last Period)	Addition (During the Period)	Total Unit Price	Total Expense	Dep. Rate	Dep. Factor	WDV (Up-to last period)	Acc. Dep. (Up-to Last period)	Dep.(During the period)	Acc. Depreciation	New WDV
1	Computer/Laptop-Laptop-Laptop	11/2025	108339.45	0.00	0.00	108339.45		20.00	1.6	108339.45	0.00	1806.00	1806.00	106533.45

Figure: Asset Depreciation History Serial Wise Report

25.15.8. Requirements:

The following column values in the report will be updated as part of the new parent–extended asset handling logic:

- Addition (Up-to Last Period): This column will display the total purchase value of all extended assets that were added prior to the selected reporting period. The system will not consider the parent asset's own purchase cost in this value; only the cumulative cost of extended assets created before the last period will be included.
- Addition (During the Period): This field will show the purchase value of extended assets added within the selected reporting period. Any new extended asset creation or extended-level addition captured during the selected date range will be reflected here.
- Total Unit Price: The system will present the combined purchase cost of the parent asset plus all associated extended assets. This represents the full capitalized value displayed under the parent asset serial in the UI.
- WDV (Up-to last period): This column will display the written-down value up to the previous period by deducting the combined accumulated depreciation (parent + extended) from the total purchase cost of the parent and extended assets recorded up to that point.
- Acc. Dep. (Up-to Last period): The accumulated depreciation up to the previous period will show the total depreciation charged on the parent asset and all extended assets until the last closing month.
- Dep. (During the period): This field will show the depreciation charged during the selected period for both the parent and extended assets.
- Acc. Depreciation: The accumulated depreciation column will display the updated total by adding the period's depreciation to the accumulated depreciation of the previous period for the entire parent–extended hierarchy.
- New WDV: The New Written-Down Value will represent the closing value of the asset group by subtracting the updated accumulated depreciation from the total unit price of the parent asset and all extended assets.

25.15.9. Assumptions:

- N/A

25.15.10. Non-functional Requirements:

- N/A

25.15.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.15.12. Exceptions:

- N/A

25.16. Asset Depreciation History (Group wise) | F25S16 | <Story JIRA ID>

25.16.1. User Story:

As an authorized user, I want to view the Asset Depreciation History Group Wise Report so that I can view the Asset Depreciation History Group Wise Report as per selected criteria.

25.16.2. User Journey:

- Log into the system.
- Go to Fixed Asset Module.
- Select Report from the top menu bar.
- Select and click on the Asset List.
- Fixed Asset Module> Report > Asset Depreciation History Group Wise Report

25.16.3. Actors:

- Authorized user.

25.16.4. Scope:

- Current Scope: Currently there is no parent-extended/subsidiary asset relationship that exists in the system.
- New Scope:
  i. Report will display the Parent Asset Serial as the primary identifier, regardless of whether the asset has one or multiple extended assets.
  ii. Transactional values associated with extended assets will be aggregated and presented under the corresponding Parent Asset Serial/Asset Group.

25.16.5. Pre-condition:

- Users must be authorized and logged into the system.
- User will click on the submit button to generate the report.

25.16.6. Impacted Areas:

- Asset Depreciation History Group Wise Report

25.16.7. Mock-up/ Prototypes:

BRAC
Location: [HO - BDHO] Head Office

Asset Depreciation History (Group Wise) Report

Asset Group: Furniture and Fixture Asset Category: Furniture As on Date: 01/12/2025

SL	Dep. for Mo/Yr	Purchase Cost	Addition (Up-to Last Period)	Addition (During The Period)	Total Unit Price	Total Expenses (For the Period)	Dep. Rate	Dep. Factor	Accumulated Dep. (Up-to Last Period)	WDV (Up-to Last Period)	Dep. (During The Period)	Accumulated Depreciation	New WDV
1	05/2025	49151409.0	0.00	0.00	49151409.00		10.00	0.3	0.00	0.00	20579244.00	20579244.00	28572165.00
2	05/2025	902436.0	0.00	0.00	902436.00		10.00	0.3	0.00	0.00	7521.00	7521.00	894915.00
3	05/2025	52000.0	0.00	0.00	52000.00		10.00	0.3	0.00	0.00	866.00	866.00	51134.00
4	06/2025	52000.0	0.00	0.00	52000.00		10.00	0.3	866.00	51134.00	433.00	1299.00	50701.00
5	06/2025	45302429.1	0.00	0.00	45302429.14		10.00	0.3	15011216.00	30291213.14	370472.00	15381688.00	29920741.14
6	07/2025	44960839.1	0.00	0.00	44960839.14		10.00	0.3	15064672.00	29896167.14	375703.00	15440375.00	29520464.14
7	08/2025	44994945.1	0.00	0.00	44994945.14		10.00	0.3	15391780.00	29603165.14	376197.00	15767977.00	29226968.14
8	09/2025	45088120.4	0.00	0.00	45088120.47		10.00	0.3	15482442.00	29605678.47	368800.00	15851242.00	29236878.47
9	10/2025	46396490.0	0.00	0.00	46396490.06		10.00	0.3	15851242.00	30545248.06	372623.00	16223865.00	30172625.06
10	11/2025	46429490.0	0.00	0.00	46429490.06		10.00	0.3	16223865.00	30205625.06	366001.00	16589866.00	29839624.06

Figure: Asset Depreciation History Group Wise Report

25.16.8. Requirements:

The following column values in the report will be updated as part of the new parent–extended asset handling logic:

- Addition (Up-to Last Period): This column will display the total purchase value of all extended assets that were added prior to the selected reporting period. The system will not consider the parent asset's own purchase cost in this value; only the cumulative cost of extended assets created before the last period will be included.
- Addition (During the Period): This field will show the purchase value of extended assets added within the selected reporting period. Any new extended asset creation or extended-level addition captured during the selected date range will be reflected here.
- Total Unit Price: The system will present the combined purchase cost of the parent asset plus all associated extended assets. This represents the full capitalized value displayed under the parent asset serial in the UI.
- WDV (Up-to last period): This column will display the written-down value up to the previous period by deducting the combined accumulated depreciation (parent + extended) from the total purchase cost of the parent and extended assets recorded up to that point.
- Acc. Dep. (Up-to Last period): The accumulated depreciation up to the previous period will show the total depreciation charged on the parent asset and all extended assets until the last closing month.
- Dep. (During the period): This field will show the depreciation charged during the selected period for both the parent and extended assets.
- Acc. Depreciation: The accumulated depreciation column will display the updated total by adding the period's depreciation to the accumulated depreciation of the previous period for the entire parent–extended hierarchy.
- New WDV: The New Written-Down Value will represent the closing value of the asset group by subtracting the updated accumulated depreciation from the total unit price of the parent asset and all extended assets.

25.16.9. Assumptions:

- N/A

25.16.10. Non-functional Requirements:

- N/A

25.16.11. Acceptance Criteria:

- All filtering criteria, user interface elements, and report generation procedures will remain unchanged and will follow the existing behavior of the Fixed Asset module.

25.16.12. Exceptions:

- N/A

Risk Analysis

This section evaluates potential project risks by assigning a Risk Level (High/Medium/Low), assessing the Likelihood of the Event, and outlining a Mitigation Plan. It aims to proactively identify and manage uncertainties to ensure effective risk mitigation throughout the project lifecycle.

SL	Risk	Level (High/Medium/Low)	Likelihood of Event	Mitigation Plan

Change Effort Estimation

1. Effort Estimation

The Effort Estimation section provides a detailed breakdown of the anticipated effort required for each activity given the successful implementation of the proposed changes. This includes estimating the amount of time in hours and the total billable effort hour will be considered as the final invoice.

SL	Item	Days
1	Project Management	
2	Business Analysis	
3	Development	
4	SQA	
5	Implementation	
	Total	

Note: *If any*

2. CR Accumulation

CR Initiated by	[Insert Client Name]	
CR Initiated on		
Type of CR	Category of CR	Accumulation (%)
Regular ☐		X%
Ad-Hoc (No accumulation) ☐	New Addition ☐	
Data Entry (No accumulation) ☐	Full Replacement ☐	
Data Correction (No accumulation) ☐	Partial Modification ☐	

Note: *Effort given in the "Regular" type of CR and Category in "New Addition" and "Partial Modification" will be included in AMC as per Accumulation percentage.*