



Message Implementation Guideline

Practice_2

based on

INVOIC

Invoice message

UN D.96A S3

Version: 1-DEV
Variant: RITMxxxxxx
Issue date: 2025/03/18
Author: EXT.Priyanka.Palli



Changes Log

No	Description of Changes	
01	Date (YYYY-MM-DD)	2025-02-13
	Author	Priyanka Palli
	SRQ Number	RITM0891509
	Location	/ UNB / S003 . 0010
	Change Description	updated ReceiverID logic for EAN reference & VAT reference related logics in map instructions 1 & 3
02	Date (YYYY-MM-DD)	2024-11-20
	Author	EXT.Priyanka Palli
	SRQ Number	RITM0550625
	Location	/ UNB / .
	Change Description	No change in the Spec but added Release Charatcer to resolve the issue with segemnt delimiter issue at output side

No = Consecutive segment number

New Changes Summary

No	Description of Changes	
01	Location	/ UNB / S003 . 0010
	Instruction Number	1
	Change Flag	Change
	Condition	If ALIe01/3239 is not equal to "NO" and SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "EAN" then
02	Map Instruction	Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154
	Location	/ UNB / S003 . 0010
	Instruction Number	2
	Change Flag	Change
03	Condition	If Map Instruction-1 is not satisfied then check SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VAT" and the last three characters of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 is equal to "MVA" then
	Map Instruction	Remove first two and last three characters (which is MVA) and Map rest of value from SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 and map the resulting value
	Additional Info	eg: SE12345678MVA -----> 12345678
	Location	/ UNB / S003 . 0010
03	Instruction Number	3
	Change Flag	Change
	Condition	If Map Instruction-1 & Map Instruction -2 are not satisfied then check SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" then
	Map Instruction	Remove first two characters from SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 and map the resulting value
03	Additional Info	eg: SE12345678912 -----> 12345678912

No = Consecutive segment number

Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0000	1	UNB	M	1	0	INTERCHANGE HEADER
0010	2	UNH	M	1	0	MESSAGE HEADER
0020	3	BGM	M	1	0	Beginning of message
0030	4	DTM	M	35	1	Date/time/period
0070	5	FTX	C	10	1	Free text
0110		SG2	C	99	1	NAD-FII-SG3
0120	6	NAD	M	1	1	Name and address
0140	7	FII	C	5	2	Financial institution information
0150		SG3	C	9999	2	RFF
0160	8	RFF	M	1	2	Reference
0110		SG2	C	99	1	NAD-SG3-SG5
0120	9	NAD	M	1	1	Name and address
0150		SG3	C	9999	2	RFF
0160	10	RFF	M	1	2	Reference
0210		SG5	C	5	2	CTA-COM
0220	11	CTA	M	1	2	Contact information
0230	12	COM	C	5	3	Communication contact
0280		SG7	C	5	1	CUX
0290	13	CUX	M	1	1	Currencies
0310		SG8	C	10	1	PAT-DTM
0320	14	PAT	M	1	1	Payment terms basis
0330	15	DTM	C	5	2	Date/time/period
0890		SG25	C	9999999	1	LIN-MEA-MEA-MEA-DTM-SG26-SG29-SG29-SG30-SG33-SG34-SG34-SG34-SG34-SG38
0900	16	LIN	M	1	1	Line item
0930	17	MEA	C	5	2	Measurements
0930	18	MEA	C	5	2	Measurements
0930	19	MEA	C	5	2	Measurements
0970	20	DTM	C	35	2	Date/time/period
1030		SG26	C	5	2	MOA
1040	21	MOA	M	1	2	Monetary amount
1160		SG29	C	10	2	RFF
1170	22	RFF	M	1	2	Reference
1160		SG29	C	10	2	RFF
1170	23	RFF	M	1	2	Reference
1190		SG30	C	10	2	PAC
1200	24	PAC	M	1	2	Package
1310		SG33	C	99	2	TAX-MOA

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used




	Counter	No	Tag	St	MaxOcc	Level	Content
	1320	25	TAX	M	1	2	Duty/tax/fee details
	1330	26	MOA	C	1	3	Monetary amount
	1350		SG34	C	20	2	NAD
	1360	27	NAD	M	1	2	Name and address
	1350		SG34	C	20	2	NAD
	1360	28	NAD	M	1	2	Name and address
	1350		SG34	C	20	2	NAD
	1360	29	NAD	M	1	2	Name and address
	1350		SG34	C	20	2	NAD
	1360	30	NAD	M	1	2	Name and address
	1470		SG38	C	15	2	ALC-SG41-SG43
	1480	31	ALC	M	1	2	Allowance or charge
	1570		SG41	C	2	3	MOA
	1580	32	MOA	M	1	3	Monetary amount
	1630		SG43	C	5	3	TAX-MOA
	1640	33	TAX	M	1	3	Duty/tax/fee details
	1650	34	MOA	C	1	4	Monetary amount
	1790	35	UNS	M	1	0	SECTION CONTROL
	1810		SG48	M	100	1	MOA
	1820	36	MOA	M	1	1	Monetary amount
	1810		SG48	M	100	1	MOA
	1820	37	MOA	M	1	1	Monetary amount
	1810		SG48	M	100	1	MOA
	1820	38	MOA	M	1	1	Monetary amount
	1860		SG50	C	10	1	TAX-MOA-MOA
	1870	39	TAX	M	1	1	Duty/tax/fee details
	1880	40	MOA	C	2	2	Monetary amount
	1880	41	MOA	C	2	2	Monetary amount
	1930	42	UNT	M	1	0	MESSAGE TRAILER

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used




Branching Diagram of Used Segments/Groups

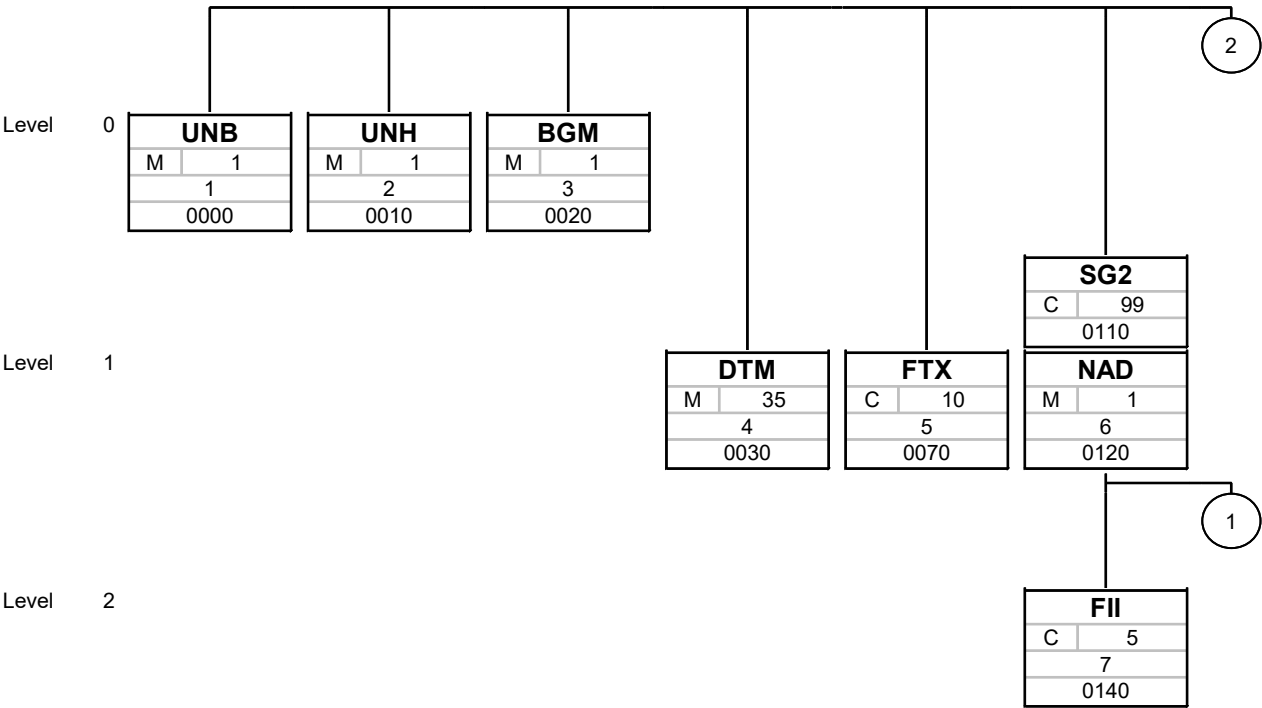


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

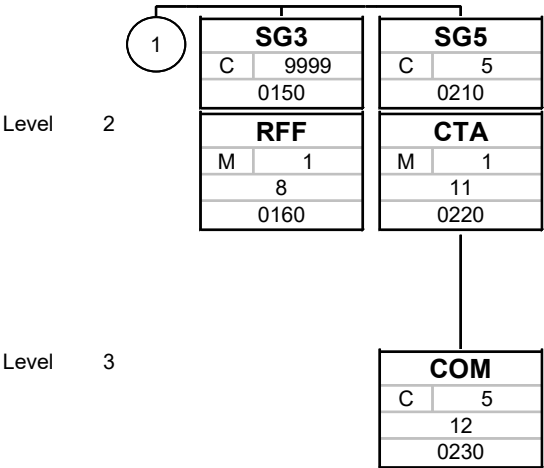


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

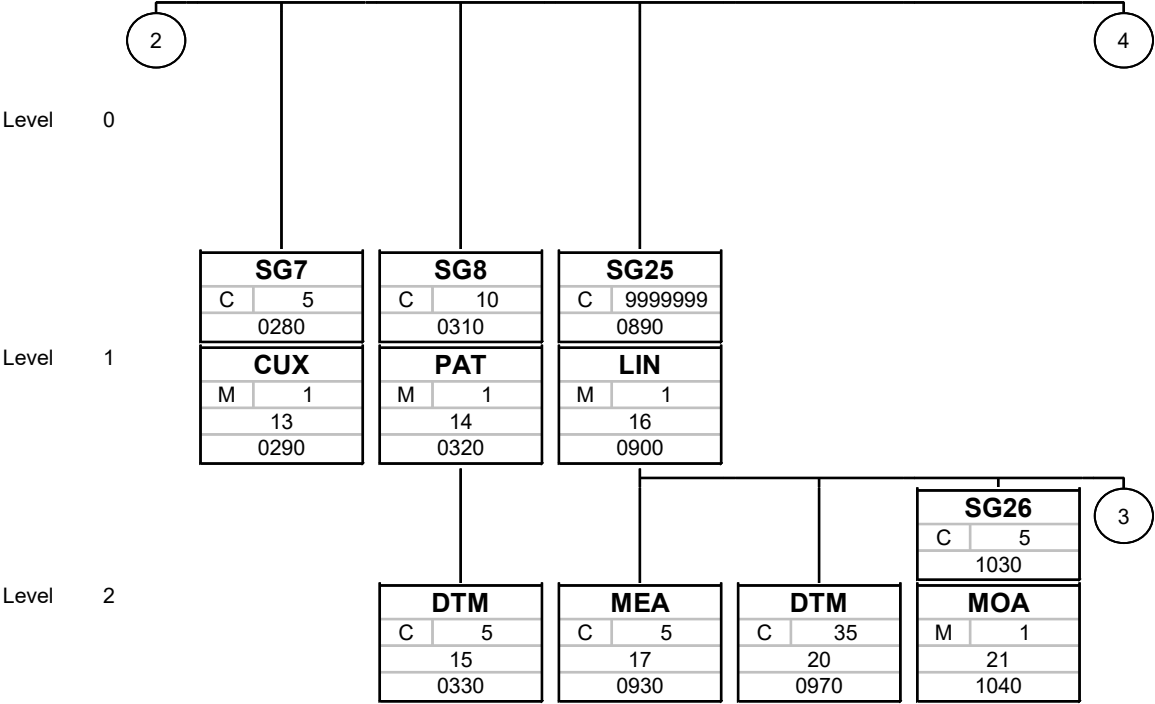


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

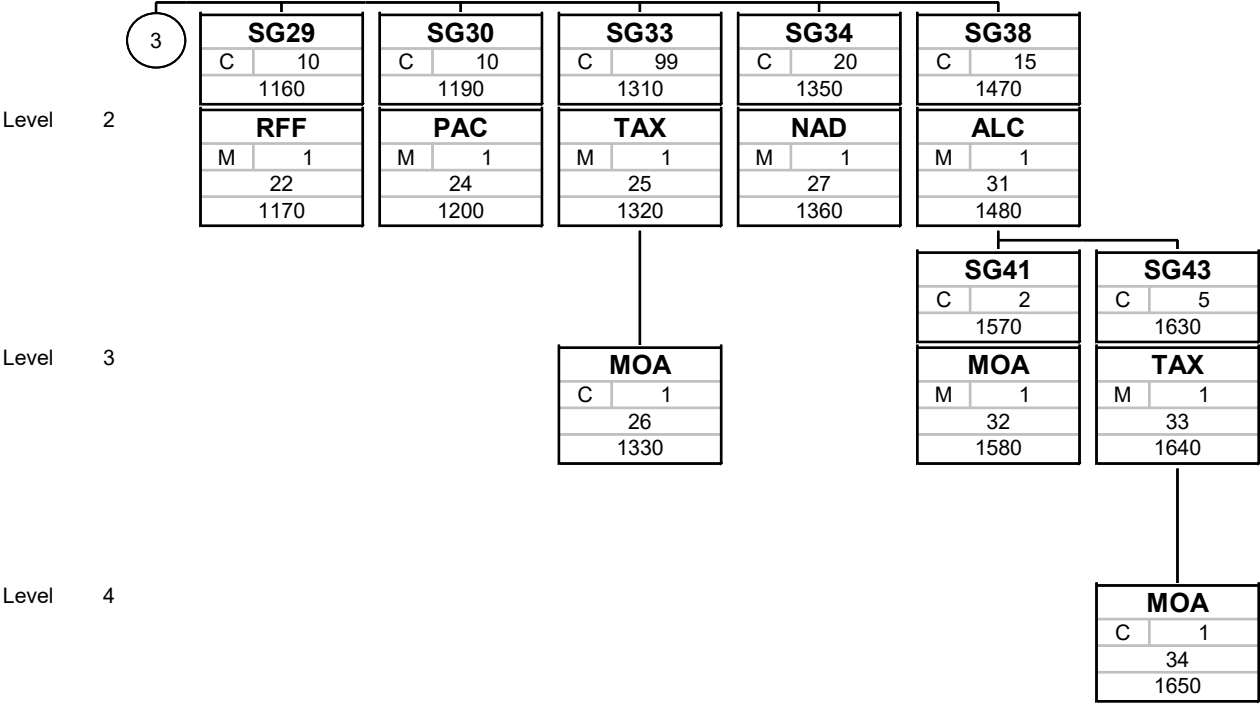

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

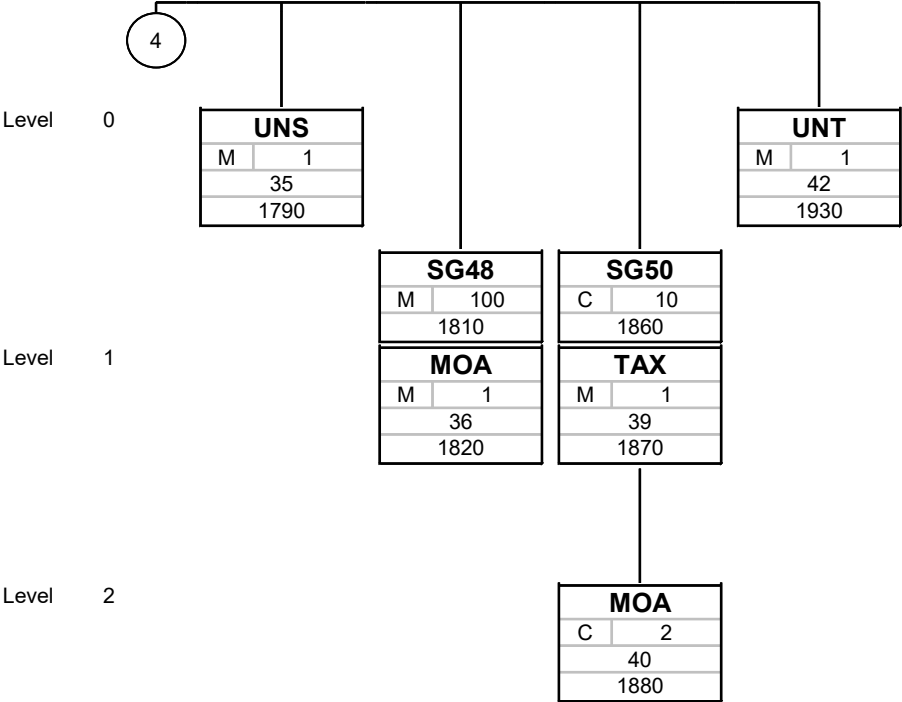

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	1	UNB	M	1	0	INTERCHANGE HEADER
------	---	------------	---	---	---	--------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNB				
S001	SYNTAX IDENTIFIER	M	M	
0001	Syntax identifier	M a4	M a4	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "UNOC"
0002	Syntax version number	M n1	M n1	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "3"
S002	INTERCHANGE SENDER	M	M	
0004	Sender identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If ALle01/3239 = "NO" then <i>Instruction</i> Map "NODSV" Instruction nr 2 <i>Condition</i> If Map Instruction-1 is not satisfied then <i>Instruction</i> Map "5790000834129"
0007	Partner identification code qualifier	C an..4	C an..4	Map Instructions Instruction nr 1 <i>Condition</i> If ALle01/3239 = "NO" then <i>Instruction</i> Map "30" Instruction nr 2 <i>Condition</i> If Map Instruction-1 is not satisfied then <i>Instruction</i> Map "14"
0008	Address for reverse routing	C an..14	N	
S003	INTERCHANGE RECIPIENT	M	M	
0010	Recipient identification	M an..35	M an..35	Map Instructions Instruction nr 1 Change <i>Condition</i> If ALle01/3239 is not equal to "NO" and SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "EAN" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 Change <i>Condition</i> If Map Instruction-1 is not satisfied then check SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VAT" and the last three characters of SG2_NAD/SG3_RFF/

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				RFFe01/C506e02/1154 is equal to "MVA" then <i>Instruction</i> Remove first two and last three characters (which is MVA) and Map rest of value from SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 and map the resulting value <i>Add. Info</i> eg: SE12345678MVA -----> 12345678 Instruction nr 3 Change <i>Condition</i> If Map Instruction-1 & Map Instruction -2 are not satisfied then check SG2_NAD/NADE01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" then <i>Instruction</i> Remove first two characters from SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 and map the resulting value <i>Add. Info</i> eg: SE12345678912 -----> 12345678912
0007	Partner identification code qualifier	C an..4	C an..4	Map Instructions Instruction nr 1 <i>Condition</i> If ALle01/3239 = "NO" then <i>Instruction</i> Map "30" Instruction nr 2 <i>Condition</i> If Map Instruction-1 is not satisfied then <i>Instruction</i> Map "14"
0014	Routing address	C an..14	N	
S004	DATE/TIME OF PREPARATION	M	M	
0017	Date of preparation	M n6	M n6	Map Instructions Instruction nr 1 <i>Instruction</i> Map Current System Date eg: format : 240314(YYMMDD)
0019	Time of preparation	M n4	M n4	Map Instructions Instruction nr 1 <i>Instruction</i> Map Current System Time eg: format : 0945(HHMM)
0020	Interchange control reference	M an..14	M an..14	Map Instructions Instruction nr 1 <i>Instruction</i> Map sequence number starting from 000001
S005	RECIPIENT'S REFERENCE PASSWORD	C	N	
0022	Recipient's reference/password	M an..14	N	
0025	Recipient's reference/password qualifier	C an2	N	
0026	Application reference	C an..14	N	
0029	Processing priority code	C a1	N	
0031	Acknowledgement request	C n1	N	
0032	Communications agreement ID	C an..35	N	
0035	Test indicator	C n1	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Segment Remarks:

Map Instructions

Instruction nr 1

Instruction No change in the Spec but added Release Charatcer to resolve the issue with segemnt delimiter issue at output side

Example:

UNB+UNOC:3+X:1+X:1+240314:0801+X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0010	2	UNH	M	1	0	MESSAGE HEADER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	Map Instructions Instruction nr 1 <i>Instruction</i> Map "1"
S009	MESSAGE IDENTIFIER	M	M	
0065	Message type identifier	M an..6	M an..6	Map Instructions Instruction nr 1 <i>Instruction</i> Map "INVOIC"
0052	Message type version number	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Map "D"
0054	Message type release number	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Map "96A"
0051	Controlling agency	M an..2	M an..2	Map Instructions Instruction nr 1 <i>Instruction</i> Map "UN"
0057	Association assigned code	C an..6	C an..6	Map Instructions Instruction nr 1 <i>Instruction</i> Map "DFDS01"
0068	Common access reference	C an..35	N	
S010	STATUS OF THE TRANSFER	C	N	
0070	Sequence message transfer number	M n..2	N	
0073	First/last sequence message transfer indication	C a1	N	

Segment Remarks:**Example:**

UNH+1+INVOIC:D:96A:UN:DFDS01'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0020	3	BGM	M	1	0	Beginning of message

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	Document/message name	C	C	
1001	Document/message name, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If BGMe01/C1002/1001 = "380" then <i>Instruction</i> Hardcode "780" Instruction nr 2 <i>Condition</i> If BGMe01/C1002/1001 != "380" then <i>Instruction</i> Map BGMe01/C1002/1001
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
1000	Document/message name	C an..35	N	
1004	Document/message number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Instruction</i> Concatenate ALle01/3239 with BGMe02/C106/1004 and then Map the resulting value
1225	Message function, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "9"
4343	Response type, coded	C an..3	N	

Segment Remarks:**Example:**

BGM+780+DK12345+9'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0030	4	DTM	M	35	1	Date/time/period
------	---	------------	---	----	---	------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If DTMe01/C507/2380 exists & DTMe01/C507/2005 = "3" then <i>Instruction</i> Hardcode "137"
2380	Date/time/period	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If DTMe01/C507/2380 exists & DTMe01/C507/2005 = "3" then <i>Instruction</i> Map DTMe01/C507/2380
2379	Date/time/period format qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If DTMe01/C507/2380 exists & DTMe01/C507/2005 = "3" then <i>Instruction</i> Hardcode "102"

Segment Remarks:**Example:**

DTM+137:20240214:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0070	5	FTX	C	10	1	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If the value of (Header)FTXe04/C108e01/4440 (Target side) exists then <i>Instruction</i> Hardcode "AAI"
4453	Text function, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If the value of (Header)FTXe04/C108e01/4440 (Target side) exists then <i>Instruction</i> Hardcode "3"
C107	Text reference	C	N	
4441	Free text, coded	M an..3	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..70	M an..70	Map Instructions Instruction nr 1 <i>Condition</i> If ALIe01/3239 = "NO" & SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "ORG" then <i>Instruction</i> Concatenate "EAN:" + SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> If ALIe01/3239 = "NO" & SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "GCR" then <i>Instruction</i> Concatenate "EAN:" + SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 3 <i>Condition</i> If ALIe01/3239 != "NO" & SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "EAN" then <i>Instruction</i> Concatenate "EAN:" + SG2_NAD/SG3_RFF/RFFe01/C506e02/1154
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	N	
4440	Free text	C an..70	N	
4440	Free text	C an..70	N	
3453	Language, coded	C an..3	N	

Segment Remarks:**Example:**

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



FTX+AAA+1++X:X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0110		SG2	C	99	1	NAD-FII-SG3
		Map Instructions Instruction nr 1 <i>Instruction</i> Populate only when SG2_NAD/NADe01/3035 = "II"				
0120	6	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" then <i>Instruction</i> Hardcode "II"
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" then <i>Instruction</i> Map SG2_NAD/NADe02/C082e01/3039
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" then <i>Instruction</i> Map SG2_NAD/NADe04/C080e01/3036
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format, coded	C an..3	N	
C059	Street	C	C	Map Instructions Instruction nr 1
3042	Street and number/p.o. box	M an..35	M an..35	Map Instructions Instruction nr 1

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				<i>Condition</i> If SG2_NAD/NADe01/3035 = "I" then <i>Instruction</i> Map SG2_NAD/NADe05/C059e01/3042
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3164	City name	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "I" then <i>Instruction</i> Map SG2_NAD/NADe06/3164
3229	Country sub-entity identification	C an..9	N	
3251	Postcode identification	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "I" then <i>Instruction</i> Map SG2_NAD/NADe08/3251
3207	Country, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "I" then <i>Instruction</i> Map SG2_NAD/NADe09/3207

Segment Remarks:**Example:**

NAD+AA+X++X+X+X++X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0110		SG2	C	99	1	NAD-FII-SG3
		Map Instructions Instruction nr 1 <i>Instruction</i> Populate only when SG2_NAD/NADe01/3035 = "II"				
0140	7	FII	C	5	2	Financial institution information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FII				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" then <i>Instruction</i> Hardcode "BF"
C078	Account identification	C	C	
3194	Account holder number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "IBA" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and if SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 != "IBA" then <i>Instruction</i> Map SG2_NAD/FIle03/C088e04/3434
3192	Account holder name	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "BLZ" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and if SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 != "BLZ" then <i>Instruction</i> Map SG2_NAD/FIle03/C088e08/3436
3192	Account holder name	C an..35	N	
6345	Currency, coded	C an..3	N	
C088	Institution identification	C	C	
3433	Institution name identification	C an..11	C an..11	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "SWF" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and if SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 != "SWF" then

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
1131	Code list qualifier	C an..3	N	<i>Instruction</i> Map SG2_NAD/Flle03/C088e01/3433
3055	Code list responsible agency, coded	C an..3	N	
3434	Institution branch number	C an..17	C an..17	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "BNK" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and if SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 != "BNK" then <i>Instruction</i> Map SG2_NAD/Flle02/C078e01/3194
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3432	Institution name	C an..70	C an..70	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "ACC" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and if SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 != "ACC" then <i>Instruction</i> Map SG2_NAD/Flle03/C088e07/3432
3436	Institution branch place	C an..70	N	
3207	Country, coded	C an..3	N	

Segment Remarks:**Example:**

FII+AA+X:X+X:::X:::X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0150		SG3	C	9999	2	RFF
0160	8	RFF	M	1	2	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" then <i>Instruction</i> Hardcode "VA"
1154	Reference number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" and if the value of SG2_NAD/SG3_RFF/RFFe01/C506e03/1156 exists then (check the first two characters of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 is equal to the value of SG2_NAD/SG3_RFF/RFFe01/C506e03/1156) then <i>Instruction</i> Do not trim anything in the value of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154, Map entire value Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "II" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" and If SG2_NAD/SG3_RFF/RFFe01/C506e03/1156 is null or empty then <i>Instruction</i> Trim First two characters in the value of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154, Map the rest of value
1156	Line number	C an..6	N	
4000	Reference version number	C an..35	N	

Segment Remarks:**Example:**

RFF+AAA:X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0110		SG2	C	99	1	NAD-SG3-SG5
		Map Instructions Instruction nr 1 <i>Instruction</i> Populate only when SG2_NAD/NADe01/3035 = "IV"				
0120	9	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Hardcode "IV"
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If ALLe01/3239 = "NO" & SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "EAN" then <i>Instruction</i> Map SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 Instruction nr 2 <i>Condition</i> Incase above condition was not satisfied then check If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Map SG2_NAD/NADe02/C082e01/3039
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Hardcode "91"
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Map SG2_NAD/NADe04/C080e01/3036
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format, coded	C an..3	N	
C059	Street	C	C	Map Instructions Instruction nr 1
3042	Street and number/p.o. box	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Map SG2_NAD/NADe05/C059e01/3042
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3164	City name	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Map SG2_NAD/NADe06/3164
3229	Country sub-entity identification	C an..9	N	
3251	Postcode identification	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Map SG2_NAD/NADe08/3251
3207	Country, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" then <i>Instruction</i> Map SG2_NAD/NADe09/3207

Segment Remarks:**Example:**

NAD+AA+X::91++X+X+X+X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0150		SG3	C	9999	2	RFF
0160	10	RFF	M	1	2	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" then <i>Instruction</i> Hardcode "VA"
1154	Reference number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" and if the value of SG2_NAD/SG3_RFF/RFFe01/C506e03/1156 exists then (check the first two characters of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154 is equal to the value of SG2_NAD/SG3_RFF/RFFe01/C506e03/1156) then <i>Instruction</i> Do not trim anything in the value of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154, Map entire value Instruction nr 2 <i>Condition</i> If SG2_NAD/NADe01/3035 = "IV" and SG2_NAD/SG3_RFF/RFFe01/C506e01/1153 = "VA" and If SG2_NAD/SG3_RFF/RFFe01/C506e03/1156 is null or empty then <i>Instruction</i> Trim First two characters in the value of SG2_NAD/SG3_RFF/RFFe01/C506e02/1154, Map the rest of value
1156	Line number	C an..6	C an..6	
4000	Reference version number	C an..35	C an..35	

Segment Remarks:**Example:**

RFF+AAA:X:X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0210		SG5	C	5	2	CTA-COM
0220	11	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/SG5_CTA/CTAe02/C056e01/3413 (Target side) exists then <i>Instruction</i> Hardcode "IC"
C056	Department or employee details	C	C	
3413	Department or employee identification	C an..17	C an..17	Map Instructions Instruction nr 1 <i>Condition</i> if (Header)FTXe01/4451 = "ZCF" and (Header)FTXe04/C108e01 should not have "@" init when FTXe04/C108e02 = "BookedBy" then <i>Instruction</i> Map (Header)FTXe04/C108e01 Instruction nr 2 <i>Condition</i> If above Map instruction 1 is not satisfied then check If SG2_NAD/NADe01/3035 = "IV" and if the value of SG2_NAD/SG5_CTA/CTAe02/C056e02/3412 exists then <i>Instruction</i> Map SG2_NAD/SG5_CTA/CTAe02/C056e02/3412 Instruction nr 3 <i>Condition</i> If above Map Instructions 1&2 were not satisfied then check SG27_LIN/SG36_NAD/NADe01/3035 = "CN" and if the value of SG27_LIN/SG36_NAD/SG39_CTA/CTAe02/C056e02/3412 exists then <i>Instruction</i> Map SG27_LIN/SG36_NAD/SG39_CTA/CTAe02/C056e02/3412
3412	Department or employee	C an..35	N	

Segment Remarks:**Example:**

CTA+IC+X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0210		SG5	C	5	2	CTA-COM
0230	12	COM	C	5	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication number	M an..512	M an..512	Map Instructions Instruction nr 1 <i>Condition</i> if (Header)FTXe01/4451 = "ZCF" and (Header)FTXe04/C108e02 = "BookedBy" and if the value of (Header)FTXe04/C108e01 has "@" init then <i>Instruction</i> Map (Header)FTXe04/C108e01 Instruction nr 2 <i>Condition</i> If above Map instruction 1 is not satisfied then check If SG2_NAD/NADe01/3035 = "IV" and if the value of SG2_NAD/SG5_CTA/COMe01/C076e01/3148 exists then <i>Instruction</i> Map SG2_NAD/SG5_CTA/COMe01/C076e01/3148 Instruction nr 3 <i>Condition</i> If above Map Instructions 1&2 were not satisfied then check SG27_LIN/SG36_NAD/NADe01/3035 = "CN" and if the value of SG27_LIN/SG36_NAD/SG39_CTA/COMe01/C076e01/3148 exists then <i>Instruction</i> Map SG27_LIN/SG36_NAD/SG39_CTA/COMe01/C076e01/3148
3155	Communication channel qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG2_NAD/SG5_CTA/COMe01/C076e01/3148 (Target side) exists then <i>Instruction</i> Hardcode "EM"

Segment Remarks:**Example:**

COM+X:AA'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0280		SG7	C	5	1	CUX
0290	13	CUX	M	1	1	Currencies

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CUX				
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345(target side) exists then <i>Instruction</i> Hardcode "2"
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345(target side) exists then <i>Instruction</i> Hardcode "10"
6348	Currency rate base	C n..4	N	
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe02/C504e02/6345 (target side) exists then <i>Instruction</i> Hardcode "3"
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe02/C504e02/6345 (target side) exists then <i>Instruction</i> Hardcode "11"
6348	Currency rate base	C n..4	N	
5402	Rate of exchange	C n..12	N	
6341	Currency market exchange, coded	C an..3	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Segment Remarks:

Example:

CUX+1:ADP:1+1:ADP:1'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0310		SG8	C	10	1	PAT-DTM
0320	14	PAT	M	1	1	Payment terms basis

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PAT				
4279	Payment terms type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If BGMe02/1004 (Target side) exists then <i>Instruction</i> Hardcode "3"
C110	Payment terms	C	N	
4277	Terms of payment identification	M an..17	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
4276	Terms of payment	C an..35	N	
4276	Terms of payment	C an..35	N	
C112	Terms/time information	C	N	
2475	Payment time reference, coded	M an..3	N	
2009	Time relation, coded	C an..3	N	
2151	Type of period, coded	C an..3	N	
2152	Number of periods	C n..3	N	

Segment Remarks:**Example:**

PAT+1'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0310		SG8	C	10	1	PAT-DTM
0330	15	DTM	C	5	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG8_PYT/DTMe01/C507e02 exists then <i>Instruction</i> Hardcode "13"
2380	Date/time/period	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG8_PYT/DTMe01/C507e02 exists then <i>Instruction</i> Map SG8_PYT/DTMe01/C507e02
2379	Date/time/period format qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG8_PYT/DTMe01/C507e02 exists then <i>Instruction</i> Hardcode "102"

Segment Remarks:**Example:**

DTM+13:X:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0890		SG25	C	9999999	1	LIN-MEA-DTM-SG26-SG29-SG30-SG33-SG34-SG38
0900	16	LIN	M	1	1	Line item

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LIN				
1082	Line item number	C n..6	C n..6	Map Instructions Instruction nr 1 <i>Condition</i> If BGMe02/1004 (Target side) exists then <i>Instruction</i> Hardcode "1"
1229	Action request/notification, coded	C an..3	N	
C212	Item number identification	C	N	
7140	Item number	C an..35	N	
7143	Item number type, coded	C an..3	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C829	Sub-line information	C	N	
5495	Sub-line indicator, coded	C an..3	N	
1082	Line item number	C n..6	N	
1222	Configuration level	C n..2	N	
7083	Configuration, coded	C an..3	N	

Segment Remarks:**Example:**

LIN+1 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0890		SG25	C	9999999	1	LIN-MEA-DTM-SG26-SG29-SG30-SG33-SG34-SG38
0930	17	MEA	C	5	2	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement application qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "WT"
C502	Measurement details	C	C	
6313	Measurement dimension, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "AAD"
6321	Measurement significance, coded	C an..3	N	
6155	Measurement attribute, coded	C an..3	N	
6154	Measurement attribute	C an..70	N	
C174	Value/range	C	C	
6411	Measure unit qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "KGM"
6314	Measurement value	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> if SG27_LIN/MEAe02/C506e01/6313 = "ACG" then <i>Instruction</i> Map SG27_LIN/MEA03/C174e02/6314 <i>Add. Info</i> Note: if the value of SG27_LIN/MEA03/C174e02/6314 having any 0's at the end then remove them and map the resulting value eg: 1234.500 -----> 1234.5
6162	Range minimum	C n..18	N	
6152	Range maximum	C n..18	N	
6432	Significant digits	C n..2	N	
7383	Surface/layer indicator, coded	C an..3	N	

Segment Remarks:**Example:**

MEA+AAA+A+04:9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0890		SG25	C	9999999	1	LIN-MEA-DTM-SG26-SG29-SG30-SG33-SG34-SG38
0930	18	MEA	C	5	2	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement application qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "CHW"
C502	Measurement details	C	C	
6313	Measurement dimension, coded	C an..3	C an..3	
6321	Measurement significance, coded	C an..3	N	
6155	Measurement attribute, coded	C an..3	N	
6154	Measurement attribute	C an..70	N	
C174	Value/range	C	C	
6411	Measure unit qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "KGM"
6314	Measurement value	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> if SG27_LIN/MEA02/C506e01/6313 = "AAD" then <i>Instruction</i> Map SG27_LIN/MEA03/C174e02/6314 <i>Add. Info</i> Note: if the value of SG27_LIN/MEA03/C174e02/6314 having any 0's at the end then remove them and map the resulting value eg: 1234.500 -----> 1234.5
6162	Range minimum	C n..18	N	
6152	Range maximum	C n..18	N	
6432	Significant digits	C n..2	N	
7383	Surface/layer indicator, coded	C an..3	N	

Segment Remarks:**Example:**

MEA+CHW++KGM: 9 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0890		SG25	C	9999999	1	LIN-MEA-DTM-SG26-SG29-SG30-SG33-SG34-SG38
0930	19	MEA	C	5	2	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement application qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "VOL"
C502	Measurement details	C	C	
6313	Measurement dimension, coded	C an..3	C an..3	Map Instructions Instruction nr 1
6321	Measurement significance, coded	C an..3	N	
6155	Measurement attribute, coded	C an..3	N	
6154	Measurement attribute	C an..70	N	
C174	Value/range	C	C	
6411	Measure unit qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "MTQ"
6314	Measurement value	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> if SG14_PAC/MEAe01/6311 = "VOL" then <i>Instruction</i> Map SG14_PAC/MEA03/C174e02/6314 <i>Add. Info</i> Note: If we have multiple SG14_PAC groups, consider the last one and if the value of SG14_PAC/MEA03/C174e02/6314 having any 0's at the end then remove them and map the resulting value eg: 1234.500 -----> 1234.5
6162	Range minimum	C n..18	N	
6152	Range maximum	C n..18	N	
6432	Significant digits	C n..2	N	
7383	Surface/layer indicator, coded	C an..3	N	

Segment Remarks:**Example:**

MEA+VOL++MTQ:9'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0890		SG25	C	9999999	1	LIN-MEA-DTM-SG26-SG29-SG30-SG33-SG34-SG38
0970	20	DTM	C	35	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG25_LIN/DTMe01/C507e02/2380 (Target side) exists then <i>Instruction</i> Hardcode "2"
2380	Date/time/period	C an..35	C an..35	
				Map Instructions Instruction nr 1 <i>Condition</i> If ALIe01/3239 = "NO" and SG27_LIN/DTMe01/C507e01/2005 = "479" then <i>Instruction</i> Map SG27_LIN/DTMe01/C507e02/2380
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1030		SG26	C	5	2	MOA
1040	21	MOA	M	1	2	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "203"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG52_MOA/MOAe01/C516e01/5025 = "125" and If the value of SG52_MOA/MOAe01/C516e02/5004 exists then <i>Instruction</i> Map SG52_MOA/MOAe01/C516e02/5004 <i>Add. Info</i> Note: If the value of SG52_MOA/MOAe01/C516e02/5004 is started with "." then remove that special character & check if the value has any "." and have decimal values after the "." -----> incase there is no decimal values then concatenate with ".00"(resulting value should have four decimal values after ".") eg: -2222 -----> 2222.00 -----> incase there is only two decimal values after the "." then concatenate with "00" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.44 ----> 2222.4400 -----> incase there is only one decimal values after the "." then concatenate with "000" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.4 ----> 2222.4000 -----> Incase if the value is 0 then Map 0.0000
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:**Example:**

MOA+203:9:USD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1160		SG29	C	10	2	RFF
1170	22	RFF	M	1	2	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If the value of SG29_RFF/RFFe01/C506e02 (Target side) exists <i>Instruction</i> Hardcode "BN"
1154	Reference number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG1_RFF/RFFe01/C506e01/1153 = "AAM" then <i>Instruction</i> Map SG1_RFF/RFFe01/C506e01/1154
1156	Line number	C an..6	N	
4000	Reference version number	C an..35	N	

Segment Remarks:**Example:**

RFF+BN:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1160		SG29	C	10	2	RFF
1170	23	RFF	M	1	2	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> If the value of SG29_RFF/RFFe01/C506e02 (Target side) exists <i>Instruction</i> Hardcode "CU"
1154	Reference number	C an..35	C an..35	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG1_RFF/RFFe01/C506e01/1153 = "ZCU" then <i>Instruction</i> Map SG1_RFF/RFFe01/C506e01/1154 Incase if we have multiple values with the same qualifer then Concatenate all and seperated them by a space eg: 1234-1 & 4321-2 -----> 1234-1 4321-2
1156	Line number	C an..6	N	
4000	Reference version number	C an..35	N	

Segment Remarks:**Example:**

RFF+CU:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1190		SG30	C	10	2	PAC
1200	24	PAC	M	1	2	Package

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PAC				
7224	Number of packages	C n..8	C n..8	Map Instructions Instruction nr 1 <i>Condition</i> If the value of SG14_PAC/PACe01/7224 exists then <i>Instruction</i> Map SG14_PAC/PACe01/7224 <i>Add. Info</i> Note: if we have multiple SG14_PAC/PAC then populate the first iteration value
C531	Packaging details	C	N	
7075	Packaging level, coded	C an..3	N	
7233	Packaging related information, coded	C an..3	N	
7073	Packaging terms and conditions, coded	C an..3	N	
C202	Package type	C	C	
7065	Type of packages identification	C an..17	C an..17	Map Instructions Instruction nr 1 <i>Condition</i> If SG14_PAC/PACe03/C202e01/7065 = "PLL" or "PLT" then <i>Instruction</i> Map "PLL" Instruction nr 2 <i>Condition</i> if above Map Instruction-1 is not satisfied then <i>Instruction</i> Map "CLL"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
7064	Type of packages	C an..35	N	
C402	Package type identification	C	N	
7077	Item description type, coded	M an..3	N	
7064	Type of packages	M an..35	N	
7143	Item number type, coded	C an..3	N	
7064	Type of packages	C an..35	N	
7143	Item number type, coded	C an..3	N	
C532	Returnable package details	C	N	
8395	Returnable package freight payment responsibility, coded	C an..3	N	
8393	Returnable package load contents, coded	C an..3	N	

Segment Remarks:**Example:**

PAC+9++1A1'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

1310 **SG33** C 99 2 **TAX-MOA**

Map Instructions

Instruction nr 1

Instruction Loop based on SG27_LIN/SG35_TAX only when the value of SG27_LIN/SG35_TAX/TAXe05/C243e04/5278 is exists when SG27_LIN/SG35_TAX/TAXe01/5283 = "7" and different in each iteration.
Incase if all the iterations have same values then populate only one time.

1320 25 **TAX** M 1 2 **Duty/tax/fee details**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TAX				
5283	Duty/tax/fee function qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "7"
C241	Duty/tax/fee type	C	C	
5153	Duty/tax/fee type, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "VAT"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5152	Duty/tax/fee type	C an..35	N	
C533	Duty/tax/fee account detail	C	N	
5289	Duty/tax/fee account identification	M an..6	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5286	Duty/tax/fee assessment basis	C an..15	N	
C243	Duty/tax/fee detail	C	C	
5279	Duty/tax/fee rate identification	C an..7	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5278	Duty/tax/fee rate	C an..17	C an..17	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG35_TAX/TAXe05/C243e04/5278 exists when SG27_LIN/SG35_TAX/TAXe01/5283 = "7" then <i>Instruction</i> Map SG27_LIN/SG35_TAX/TAXe05/C243e04/5278
5273	Duty/tax/fee rate basis identification	C an..12	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5305	Duty/tax/fee category, coded	C an..3	C an..3	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG35_TAX/TAXe05/C243e04/5278 = "0.000" or "0" then <i>Instruction</i> Hardcode "E" Instruction nr 2 <i>Condition</i> If Map Instruction-1 is not satisfied then <i>Instruction</i> Hardcode "S"
3446	Party tax identification number	C an..20	N	

Segment Remarks:**Example:**

TAX+7+VAT+++:::X+A'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

1310 **SG33** C 99 2 **TAX-MOA**

Map Instructions

Instruction nr 1

Instruction Loop based on SG27_LIN/SG35_TAX only when the value of SG27_LIN/SG35_TAX/TAXe05/C243e04/5278 is exists when SG27_LIN/SG35_TAX/TAXe01/5283 = "7" and different in each iteration.
Incise if all the iterations have same values then populate only one time.

1330 26 **MOA** C 1 3 **Monetary amount**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	
				Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "124"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG35_TAX/MOAe01/C516e01/5025 = "124" then <i>Instruction</i> Map SG27_LIN/SG35_TAX/MOAe01/C516e01/5004 Incase if the value of SG27_LIN/SG35_TAX/TAXe05/C243e04/5278 is same for couple of iterations when SG27_LIN/SG35_TAX/TAXe01/5283 = "7" then do the addition of values of SG27_LIN/SG35_TAX/MOAe01/C516e01/5004 and populate it in one iteration.
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:

Example:

MOA+124:9:USD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1350		SG34	C	20	2	NAD
1360	27	NAD	M	1	2	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "CZ"
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe02/C082e01/3039
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe04/C080e01/3036
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format, coded	C an..3	N	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe05/C059e01/3042
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3164	City name	C an..35	C an..35	Map Instructions

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe06/3164
3229	Country sub-entity identification	C an..9	N	
3251	Postcode identification	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe08/3251
3207	Country, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe09/3207

Segment Remarks:**Example:**

NAD+CZ+X++X+X+X++X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1350		SG34	C	20	2	NAD
1360	28	NAD	M	1	2	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "PW"
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe02/C082e01/3039
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe04/C080e01/3036
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format, coded	C an..3	N	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe05/C059e01/3042
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3164	City name	C an..35	C an..35	Map Instructions

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe06/3164
3229	Country sub-entity identification	C an..9	N	
3251	Postcode identification	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe08/3251
3207	Country, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CZ" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe09/3207

Segment Remarks:**Example:**

NAD+PW+X++X+X+X++X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1350		SG34	C	20	2	NAD
1360	29	NAD	M	1	2	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "CN"
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe02/C082e01/3039
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe04/C080e01/3036
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format, coded	C an..3	N	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe05/C059e01/3042
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3164	City name	C an..35	C an..35	Map Instructions

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe06/3164
3229	Country sub-entity identification	C an..9	N	
3251	Postcode identification	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe08/3251
3207	Country, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe09/3207

Segment Remarks:**Example:**

NAD+CN+X++X+X+X++X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1350		SG34	C	20	2	NAD
1360	30	NAD	M	1	2	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "DP"
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe02/C082e01/3039
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	N	
3124	Name and address line	M an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
3124	Name and address line	C an..35	N	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe04/C080e01/3036
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3036	Party name	C an..35	N	
3045	Party name format, coded	C an..3	N	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe05/C059e01/3042
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3042	Street and number/p.o. box	C an..35	N	
3164	City name	C an..35	C an..35	Map Instructions

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe06/3164
3229	Country sub-entity identification	C an..9	N	
3251	Postcode identification	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe08/3251
3207	Country, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG36_NAD/NADe01/3035 = "CN" then <i>Instruction</i> Map SG27_LIN/SG36_NAD/NADe09/3207

Segment Remarks:**Example:**

NAD+DP+X++X+X+X++X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1470		SG38	C	15	2	ALC-SG41-SG43
		Map Instructions Instruction nr 1 <i>Instruction</i> Loop based on SG27_LIN/SG40_ALC				
1480	31	ALC	M	1	2	Allowance or charge

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
ALC				
5463	Allowance or charge qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "C"
C552	Allowance/charge information	C	C	
1230	Allowance or charge number	C an..35	C an..35	
5189	Charge/allowance description, coded	C an..3	N	
4471	Settlement, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "6"
1227	Calculation sequence indicator, coded	C an..3	N	
C214	Special services identification	C	C	
7161	Special services, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "ACT"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "87"
7160	Special service	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Instruction</i> Map SG27_LIN/SG40_ALC/ALCe05/C214e04/7160
7160	Special service	C an..35	N	

Segment Remarks:**Example:**

ALC+C++6++ACT': :87:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1570		SG41	C	2	3	MOA
		Map Instructions Instruction nr 1 <i>Instruction</i> Loop based on SG27_LIN/SG40_ALC/SG43_MOA				
1580	32	MOA	M	1	3	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "8"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG40_ALC/SG43_MOA/MOAe01/C516e01/5025 = "8" then <i>Instruction</i> Map SG27_LIN/SG40_ALC/SG43_MOA/MOAe01/C516e01/5004 <i>Add. Info</i> Note: If the value of SG27_LIN/SG40_ALC/SG43_MOA/MOAe01/C516e01/5004 is started with "." then remove that special character & check if the value has any "." and have decimal values after the "." -----> incase there is no decimal values then concatenate with ".00"(resulting value should have four decimal values after ".") eg: -2222 -----> 2222.00 -----> incase there is only two decimal values after the "." then concatenate with "00" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.44 ----> 2222.4400 -----> incase there is only one decimal values after the "." then concatenate with "000" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.4 ----> 2222.4000
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Segment Remarks:

Example:

MOA+1:2222.00:ADP'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

1630 **SG43** C 5 3 **TAX-MOA**

Map Instructions

Instruction nr 1

Instruction Loop based on SG27_LIN/SG40_ALC/SG45_TAX

1640 33 **TAX** M 1 3 **Duty/tax/fee details**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TAX				
5283	Duty/tax/fee function qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "7"
C241	Duty/tax/fee type	C	C	
5153	Duty/tax/fee type, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "VAT"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5152	Duty/tax/fee type	C an..35	N	
C533	Duty/tax/fee account detail	C	N	
5289	Duty/tax/fee account identification	M an..6	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5286	Duty/tax/fee assessment basis	C an..15	N	
C243	Duty/tax/fee detail	C	C	
5279	Duty/tax/fee rate identification	C an..7	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5278	Duty/tax/fee rate	C an..17	C an..17	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG40_ALC/SG45_TAX/TAXe01/5283 = "7" then <i>Instruction</i> Map SG27_LIN/SG40_ALC/SG45_TAX/TAXe05/C243e04
5273	Duty/tax/fee rate basis identification	C an..12	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5305	Duty/tax/fee category, coded	C an..3	C an..3	Map Instructions

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Condition</i> If SG27_LIN/SG40_ALC/SG45_TAX/TAXe05/ C243e04/5278 = "0.000" or "0" then <i>Instruction</i> Hardcode "E" Instruction nr 2 <i>Condition</i> If Map Instruction-1 is not satisfied then <i>Instruction</i> Hardcode "S"
3446	Party tax identification number	C an..20	N	

Segment Remarks:**Example:**

TAX+1+AAA+++:::X+A'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1630		SG43	C	5	3	TAX-MOA
		Map Instructions Instruction nr 1 <i>Instruction</i> Loop based on SG27_LIN/SG40_ALC/SG45_TAX				
1650	34	MOA	C	1	4	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "124"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG27_LIN/SG40_ALC/SG45_TAX/MOAe01/C516e01/5025 = "124" then <i>Instruction</i> Map SG27_LIN/SG40_ALC/SG45_TAX/MOAe01/C516e01/5004
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:**Example:**

MOA+124:9:USD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1790	35	UNS	M	1	0	SECTION CONTROL

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNS				
0081	Section identification	M a1	M a1	Map Instructions Instruction nr 1 <i>Condition</i> If BGMe02/1004 (Target side) exists then <i>Instruction</i> Hardcode "S"

Segment Remarks:**Example:**

UNS+S'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1810		SG48	M	100	1	MOA
1820	36	MOA	M	1	1	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "125"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG52_MOA/MOAe01/C516e01/5025 = "125" then <i>Instruction</i> Map SG52_MOA/MOAe01/C516e02/5004 <i>Add. Info</i> Note: If the value of SG52_MOA/MOAe01/C516e02/5004 is started with "." then remove that special character & check if the value has any "." and have decimal values after the "." -----> incase there is no decimal values then concatenate with ".00"(resulting value should have four decimal values after ".") eg: -2222 -----> 2222.00 -----> incase there is only two decimal values after the "." then concatenate with "00" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.44 ----> 2222.4400 -----> incase there is only one decimal values after the "." then concatenate with "000" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.4 ----> 2222.4000 -----> Incase if the value is 0 then Map 0.0000
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:**Example:**

MOA+125:9:USD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1810		SG48	M	100	1	MOA
1820	37	MOA	M	1	1	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "86"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG52_MOA/MOAe01/C516e01/5025 = "128" then <i>Instruction</i> Map SG52_MOA/MOAe01/C516e02/5004 <i>Add. Info</i> Note: If the value of SG52_MOA/MOAe01/C516e02/5004 is started with "." then remove that special character & check if the value has any "." and have decimal values after the "." -----> incase there is no decimal values then concatenate with ".00"(resulting value should have four decimal values after ".") eg: -2222 -----> 2222.00 -----> incase there is only two decimal values after the "." then concatenate with "00" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.44 ----> 2222.4400 -----> incase there is only one decimal values after the "." then concatenate with "000" at the end of the resulting value(resulting value should have four decimal values after ".") eg: -2222.4 ----> 2222.4000 -----> Incase if the value is 0 then Map 0.0000
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:**Example:**

MOA+86:9:USD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1810		SG48	M	100	1	MOA
1820	38	MOA	M	1	1	Monetary amount

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "176"
5004	Monetary amount	C n..18	C n..18	Map Instructions Instruction nr 1 <i>Condition</i> If SG52_MOA/MOAe01/C516e01/5025 = "176" then <i>Instruction</i> Map SG52_MOA/MOAe01/C516e02/5004 <i>Add. Info</i> Note: If the value of SG52_MOA/MOAe01/C516e02/5004 is started with "." then remove that special character & check if the value has any "." and have decimal values after the "." -----> incase there is no decimal values then concatenate with ".00"(resulting value should have two decimal values after ".") eg: -2222 -----> 2222.00 -----> incase there is only one decimal values after the "." then concatenate with "0" at the end of the resulting value(resulting value should have two decimal values after ".") eg: -2222.4 ----> 2222.40 ----->If the value is "0" then Map "0.00"
6345	Currency, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:**Example:**

MOA+86:9:USD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

1860 **SG50** C 10 1 **TAX-MOA**

Map Instructions

Instruction nr 1

Instruction Loop based on SG54_TAX only when the value of SG54_TAX/TAXe05/C243e04/5278 is exist and different in each iteration.
Incase if all the iterations have same values then populate only one time.

1870 39 **TAX** M 1 1 **Duty/tax/fee details**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TAX				
5283	Duty/tax/fee function qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "7"
C241	Duty/tax/fee type	C	C	
5153	Duty/tax/fee type, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "VAT"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5152	Duty/tax/fee type	C an..35	N	
C533	Duty/tax/fee account detail	C	N	
5289	Duty/tax/fee account identification	M an..6	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5286	Duty/tax/fee assessment basis	C an..15	N	
C243	Duty/tax/fee detail	C	C	
5279	Duty/tax/fee rate identification	C an..7	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5278	Duty/tax/fee rate	C an..17	C an..17	Map Instructions Instruction nr 1 <i>Condition</i> If SG54_TAX/TAXe01/5283 = "7" then <i>Instruction</i> Map SG54_TAX/TAXe05/C243e04/5278
5273	Duty/tax/fee rate basis identification	C an..12	N	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
5305	Duty/tax/fee category, coded	C an..3	C an..3	Map Instructions

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Instruction nr 1 <i>Condition</i> If SG54_TAX/TAXe05/C243e04/5278 = "0.000" or "0" then <i>Instruction</i> Hardcode "E" Instruction nr 2 <i>Condition</i> If Map Instruction-1 is not satisfied then <i>Instruction</i> Hardcode "S"
3446	Party tax identification number	C an..20	N	

Segment Remarks:**Example:**

TAX+7+VAT+++:::X+A'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

1860 **SG50** C 10 1 **TAX-MOA**

Map Instructions

Instruction nr 1

Instruction Loop based on SG54_TAX only when the value of SG54_TAX/TAXe05/C243e04/5278 is exist and different in each iteration.
Incise if all the iterations have same values then populate only one time.

1880 40 **MOA** C 2 2 **Monetary amount**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	
				Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "125"
5004	Monetary amount	C n..18	C n..18	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG54_TAX/MOAe01/C516e01/5025 = "125" then <i>Instruction</i> Map SG52_MOA/MOAe01/C516e02/5004 Incise if we multiple entries of SG54_TAX/ MOAe01/C516e01/5025 = "125" then Sum up all values of SG52_MOA/MOAe01/C516e02/5004 and map
6345	Currency, coded	C an..3	C an..3	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:

Example:

MOA+125:9:USD'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

1860 **SG50** C 10 1 **TAX-MOA**

Map Instructions

Instruction nr 1

Instruction Loop based on SG54_TAX only when the value of SG54_TAX/TAXe05/C243e04/5278 is exist and different in each iteration.
Incase if all the iterations have same values then populate only one time.

1880 41 **MOA** C 2 2 **Monetary amount**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MOA				
C516	Monetary amount	M	M	
5025	Monetary amount type qualifier	M an..3	M an..3	
				Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "124"
5004	Monetary amount	C n..18	C n..18	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG54_TAX/MOAe01/C516e01/5025 = "176" then <i>Instruction</i> Map SG52_MOA/MOAe01/C516e02/5004
6345	Currency, coded	C an..3	C an..3	
				Map Instructions Instruction nr 1 <i>Condition</i> If SG7_CUX/CUXe01/C504e02/6345 exists then <i>Instruction</i> Map SG7_CUX/CUXe01/C504e02/6345
6343	Currency qualifier	C an..3	N	
4405	Status, coded	C an..3	N	

Segment Remarks:

Example:

MOA+124:9:USD'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
1930	42	UNT	M	1	0	MESSAGE TRAILER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNT				
0074	Number of segments in a message	M n..6	M n..6	
0062	Message reference number	M an..14	M an..14	

Segment Remarks:**Example:**

UNT+142+X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Example Message

No	Tag	Example
01	UNB	UNB+UNOC:3+X:1+X:1+240314:0801+X'
02	UNH	UNH+1+INVOIC:D:96A:UN:DFDS01'
03	BGM	BGM+780+DK12345+9'
04	DTM	DTM+137:20240214:102'
05	FTX	FTX+AAA+1++X:X'
SG2		
06	NAD	NAD+AA+X++X+X+X++X+AD'
07	FII	FII+AA+X:X+X:::X:::X'
SG3		
08	RFF	RFF+AAA:X'
SG2		
09	NAD	NAD+AA+X::91++X+X+X++X+AD'
SG3		
10	RFF	RFF+AAA:X:X:X'
SG5		
11	CTA	CTA+IC+X'
12	COM	COM+X:AA'
SG7		
13	CUX	CUX+1:ADP:1+1:ADP:1'
SG8		
14	PAT	PAT+1'
15	DTM	DTM+13:X:102'
SG25		
16	LIN	LIN+1'
17	MEA	MEA+AAA+A+04:9'
18	MEA	MEA+CHW++KGM:9'
19	MEA	MEA+VOL++MTQ:9'
20	DTM	DTM+2:X:102'
SG26		
21	MOA	MOA+203:9:USD'
SG29		
22	RFF	RFF+BN:X'
SG29		
23	RFF	RFF+CU:X'
SG30		
24	PAC	PAC+9++1A1'

No = Consecutive segment number



No	Tag	Example
	SG33	
25	TAX	TAX+7+VAT+++:::X+A'
26	MOA	MOA+124:9:USD'
	SG34	
27	NAD	NAD+CZ+X+X+X+X+X+AD'
	SG34	
28	NAD	NAD+PW+X+X+X+X+X+AD'
	SG34	
29	NAD	NAD+CN+X+X+X+X+X+AD'
	SG34	
30	NAD	NAD+DP+X+X+X+X+X+AD'
	SG38	
31	ALC	ALC+C++6++ACT::87:X'
	SG41	
32	MOA	MOA+1:2222.00:ADP'
	SG43	
33	TAX	TAX+1+AAA+++:::X+A'
34	MOA	MOA+124:9:USD'
35	UNS	UNS+S'
	SG48	
36	MOA	MOA+125:9:USD'
	SG48	
37	MOA	MOA+86:9:USD'
	SG48	
38	MOA	MOA+86:9:USD'
	SG50	
39	TAX	TAX+7+VAT+++:::X+A'
40	MOA	MOA+125:9:USD'
41	MOA	MOA+124:9:USD'
42	UNT	UNT+142+X'

No = Consecutive segment number