



Message Implementation Guideline

D_TX_NE_CHIxxxxSHPV1xxSTSD10BIE

based on

IFTSTA

International multimodal status report message

UN D.10B S4

Version: 1-DEV
Variant: EDIT0003407
Issue date: 26.02.2024
Author: André Ganho


Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0010	1	UNH	M	1	0	Message header
0020	2	BGM	M	1	0	Beginning of message
0130	3	LOC	C	9	1	Place/location identification
0500		SG13	C	99999	1	CNI-SG14
0510	4	CNI	M	1	1	Consignment information
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0550	5	STS	M	1	2	Status
0560	6	RFF	C	999	3	Reference
0570	7	DTM	C	9	3	Date/time/period
0590	8	FTX	C	9	3	Free text
0590	9	FTX	C	9	3	Free text
0650	10	LOC	C	1	3	Place/location identification
0670		SG17	C	99	3	TDT
0680	11	TDT	M	1	3	Transport information
0500		SG13	C	99999	1	CNI-SG14
0510	12	CNI	M	1	1	Consignment information
0540		SG14	M	99	2	STS-DTM-FTX-LOC-SG17
0550	13	STS	M	1	2	Status
0570	14	DTM	C	9	3	Date/time/period
0590	15	FTX	C	9	3	Free text
0590	16	FTX	C	9	3	Free text
0650	17	LOC	C	1	3	Place/location identification
0670		SG17	C	99	3	TDT
0680	18	TDT	M	1	3	Transport information
0000	19	UNZ	M	1	0	Interchange trailer

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Branching Diagram of Used Segments/Groups

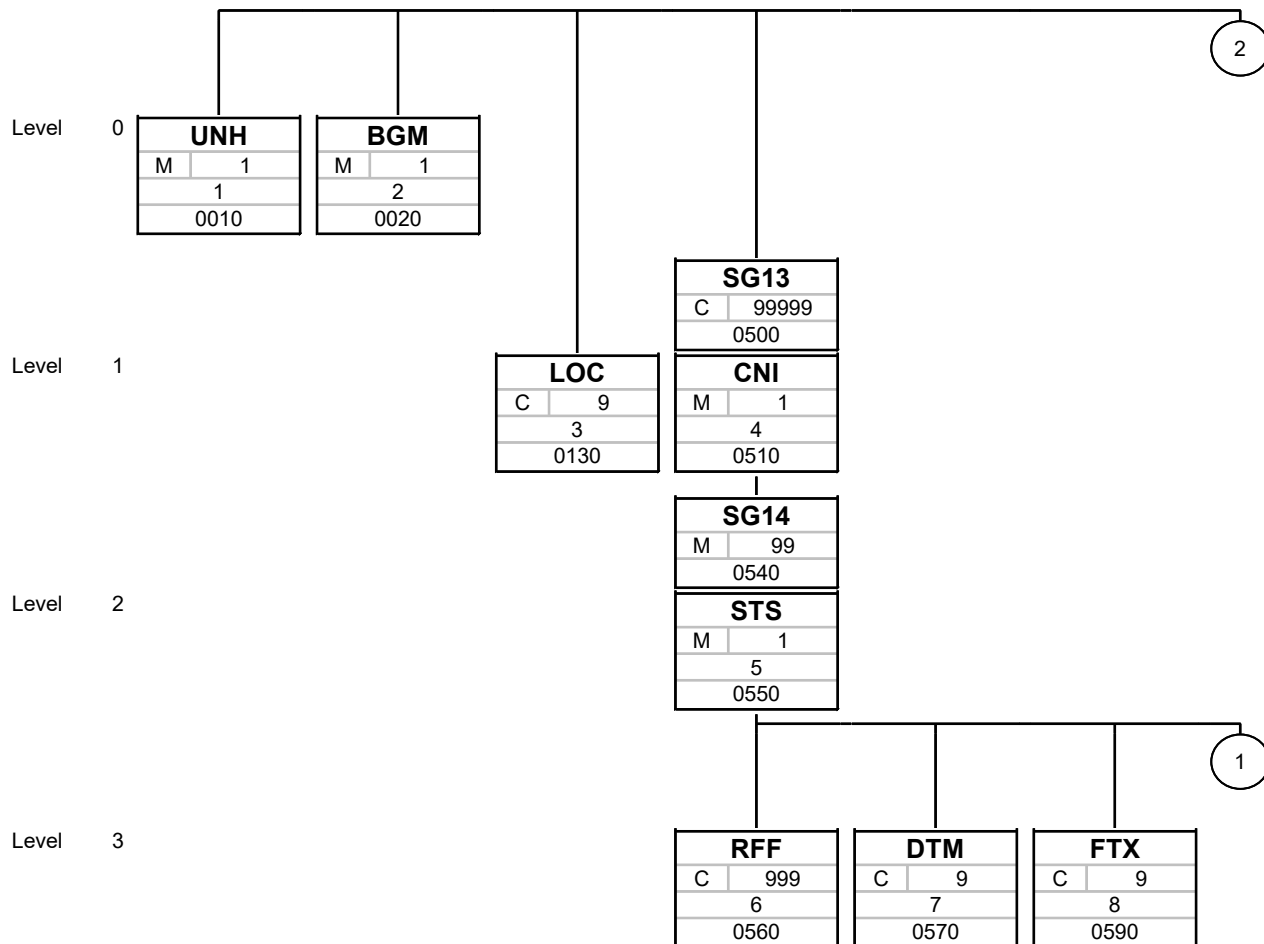

Tag
St MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group


No = Consecutive segment number

Counter = Counter of segment/group within the standard

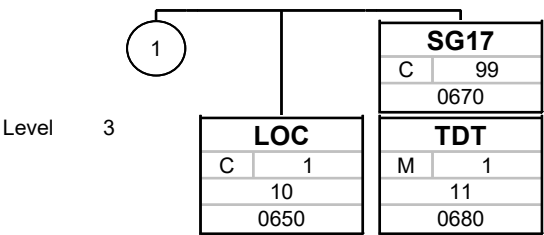

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

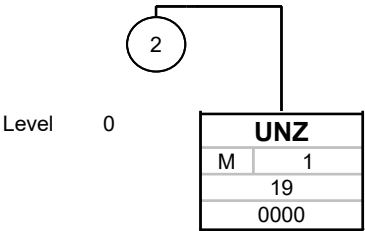

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0010	1	UNH	M	1	0	Message header
------	---	------------	---	---	---	----------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	
S009	Message identifier	M	M	
0065	Message type	M an..6	M an..6	
0052	Message version number	M an..3	M an..3	
0054	Message release number	M an..3	M an..3	
0051	Controlling agency, coded	M an..3	M an..3	
0057	Association assigned code	C an..6	C an..6	
0110	Code list directory version number	C an..6	C an..6	
0113	Message type sub-function identification	C an..6	C an..6	
0068	Common access reference	C an..35	C an..35	
S010	Status of the transfer	C	C	
0070	Sequence of transfers	M n..2	M n..2	
0073	First and last transfer	C a1	C a1	
S016	Message subset identification	C	C	
0115	Message subset identification	M an..14	M an..14	
0116	Message subset version number	C an..3	C an..3	
0118	Message subset release number	C an..3	C an..3	
0051	Controlling agency, coded	C an..3	C an..3	
S017	Message implementation guideline identification	C	C	
0121	Message implementation guideline identification	M an..14	M an..14	
0122	Message implementation guideline version number	C an..3	C an..3	
0124	Message implementation guideline release number	C an..3	C an..3	
0051	Controlling agency, coded	C an..3	C an..3	
S018	Scenario identification	C	C	
0127	Scenario identification	M an..14	M an..14	
0128	Scenario version number	C an..3	C an..3	
0130	Scenario release number	C an..3	C an..3	
0051	Controlling agency, coded	C an..3	C an..3	

Segment Remarks:

Example:

UNH+X+IFTSTA:D:10B:UN:X:X:AA+X+9:C+X:X:X:UN+X:X:X:UN+X:X:X:UN'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0020	2	BGM	M	1	0	Beginning of message

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	Document/message name	C	C	
1001	Document name code	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "77"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
1000	Document name	C an..35	N	
C106	Document/message identification	C	C	
1004	Document identifier	C an..70	C an..70	Map Instructions Instruction nr 1 <i>Condition</i> if value found in "master""additional_api_data""cw_id" <i>Instruction</i> Map from "master""additional_api_data""cw_id" if not found move on with instruction 2 <i>Add. Info</i> CCN2954251 Instruction nr 2 <i>Condition</i> if value found in "master""number" <i>Instruction</i> Map from "master""number" <i>Add. Info</i> 99908064114
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	
1225	Message function code	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Hardcode "9"
4343	Response type code	C an..3	N	

Segment Remarks:**Map Instructions****Instruction nr 1**

Add. Info Each input file can create multiple CNI segments. Each unique value found in master_number should create CNI segment with "TransportMaster" tag. Each unique value in shipments/hawb_number should create CNI segment without any additional tag.

Scenario 1:

One master_number & one shipments/hawb_number = 2 CNI segments

Scenario 2:

One master_number & multiple shipments/hawb_number = 1 CNI segment with "TransportMaster" & multiple CNI without the tag

Scenario 3:

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

Counter = Counter of segment/group within the standard

St = Status

EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent,

A=Advised, N=Not used



NO master_number & multiple shipments/hawb_number = multiple CNL segments without "TransportMaster"

Example:

BGM+77+CCN2954251+9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0130	3	LOC	C	9	1	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if value found in Master__number OR if vlaue found in shipments/hawb_number <i>Instruction</i> map "193"
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> if value found in master_number OR if vlaue found in shipments/hawb_number <i>Instruction</i> map "DE"
1131	Code list identification code	C an..17	C an..17	Map Instructions Instruction nr 1 <i>Condition</i> if value found in master_number OR if vlaue found in shipments/hawb_number <i>Instruction</i> map "162"
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	N	
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**Example:**

LOC+193+DE:162'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0500		SG13	C	99999	1	CNI-SG14
0510	4	CNI	M	1	1	Consignment information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CNI				
1490	Consolidation item number	C n..5	C n..5	Map Instructions Instruction nr 1 <i>Instruction</i> Insert counter starting with one and incrementing by one on each occurrence of master_number
C503	Document/message details	C	C	
1004	Document identifier	C an..70	C an..70	Map Instructions Instruction nr 1 <i>Condition</i> if data found in master_number <i>Instruction</i> map from master_number
1373	Document status code	C an..3	N	
1366	Document source description	C an..70	C an..70	Map Instructions Instruction nr 1 <i>Condition</i> if data found in master_number <i>Instruction</i> map "TransportMaster"
3453	Language name code	C an..3	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	
1312	Consignment load sequence identifier	C n..4	N	

Segment Remarks:**General Notes**

CONSOL LEVEL UPDATE - create as many CNI as unique values in master_number with "TransportMaster" value in CNI/C503.1366

Example:

CNI+1+17672387663::TransportMaster'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0550	5	STS	M	1	2	Status

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
STS				
C601	Status category	C	C	
9015	Status category code	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "ZCN"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C555	Status	C	C	
4405	Status description code	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if data found in master_number <i>Instruction</i> map "RCV"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
4404	Status description	C an..35	N	Instruction nr 2 <i>Condition</i> ELSE <i>Instruction</i> do not create CNI segment
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
	code			
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	

Segment Remarks:

Example:

STS+ZCN+RCV'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0560	6	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if data found in /id <i>Instruction</i> map "SID"
1154	Reference identifier	C an..70	C an..70	Map Instructions Instruction nr 1 <i>Condition</i> if data found in /id <i>Instruction</i> map from /id
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	C an..9	Map Instructions Instruction nr 1 <i>Condition</i> if data found in /id <i>Instruction</i> Hardcode "PASSTHRU"
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+SID:f3faaff73-8ae6-4192-98fa-2f9912f8fa13: :PASSTHRU'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0570	7	DTM	C	9	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcoded "334" List of valid codes 334 Status change date/time
2380	Date or time or period text	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /brokendown_at <i>Instruction</i> remove special characters and map from /brokendown_at
2379	Date or time or period format code	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcoded "203" List of valid codes 203 CCYYMMDDHHMM

Segment Remarks:**Example:**

DTM+334:received:203'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0590	8	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "ZEP"
4453	Free text function code	C an..3	N	
C107	Text reference	C	C	
4441	Free text description code	M an..17	M an..17	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "Location"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	Map Instructions Instruction nr 1 <i>Instruction</i> "sum up all values on shipment level from, "pieces " and create \$pieces <i>Add. Info</i> 5 Instruction nr 2 <i>Instruction</i> Concatenate(" ", "FAC=CFS", " ", "LOC=DEFRA", " ", add "QTY=\$pieces ") <i>Add. Info</i> " FAC=CFS LOC=DEFRA QTY=5"
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZEP++Location+|FAC=CFS|LOC=DEFRA|QTY=5'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0590	9	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcoded "ZTF"
4453	Free text function code	C an..3	N	
C107	Text reference	C	C	
4441	Free text description code	M an..17	M an..17	Map Instructions Instruction nr 1 <i>Condition</i> if "images" are available on master level <i>Instruction</i> map the links of "images" that are found
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZTF++Images '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-LOC-SG17
0650	10	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if data found in master_number <i>Instruction</i> map "Z01"
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> if data found in master_number <i>Instruction</i> map "CHI FRA"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	N	
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**Example:**

LOC+Z01+CHI FRA'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	11	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "20"
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "4"
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
	code			
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:

Example:

TDT+20++4'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0500		SG13	C	99999	1	CNI-SG14
0510	12	CNI	M	1	1	Consignment information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CNI				
1490	Consolidation item number	C n..5	C n..5	Map Instructions Instruction nr 1 <i>Instruction</i> Insert counter starting with one and incrementing by one on each occurrence of shipments/hawb_number
C503	Document/message details	C	C	
1004	Document identifier	C an..70	C an..70	Map Instructions Instruction nr 1 <i>Condition</i> if value found in shipments/additional_api_data/cw_id <i>Instruction</i> Map from shipments/additional_api_data/cw_id, if no data found go to instruction 2 Instruction nr 2 <i>Instruction</i> Concatenate: ("S", shipments/hawb_number)
1373	Document status code	C an..3	N	
1366	Document source description	C an..70	N	
3453	Language name code	C an..3	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	
1312	Consignment load sequence identifier	C n..4	N	

Segment Remarks:**General Notes****Additional Notes**

SHIPMENT LEVEL UPDATE - create as many CNI as manu unique values in shipments/hawb_number
 Shipment level must not have any value under CNI/C503.1366

Example:

CNI+2+cw_id'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-DTM-FTX-LOC-SG17
0550	13	STS	M	1	2	Status

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
STS				
C601	Status category	C	C	
9015	Status category code	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /type <i>Instruction</i> map "ZCN"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C555	Status	C	C	
4405	Status description code	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /type <i>Instruction</i> map "CCI"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
4404	Status description	C an..35	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
C556	Status reason	C	N	
9013	Status reason description code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	

Segment Remarks:**Example:**

STS+ZCN+CCI '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-DTM-FTX-LOC-SG17
0570	14	DTM	C	9	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "334" List of valid codes 334 Status change date/time
2380	Date or time or period text	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /brokendown_at <i>Instruction</i> remove special signs and map from /brokendown_at Instruction nr 2 <i>Condition</i> if value not found in /brokendown_at <i>Instruction</i> do not create DTM segment
2379	Date or time or period format code	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "203" List of valid codes 203 CCYYMMDDHHMM

Segment Remarks:**Example:**

DTM+334:cargo checked in:203'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-DTM-FTX-LOC-SG17
0590	15	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /shipments/additional_api_data/cw_id or if value found shipments/hawb_number <i>Instruction</i> map "ZEP"
4453	Free text function code	C an..3	N	
C107	Text reference	C	C	
4441	Free text description code	M an..17	M an..17	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /shipments/additional_api_data/cw_id or if value found shipments/hawb_number <i>Instruction</i> map "Location"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	Map Instructions Instruction nr 1 <i>Condition</i> if shipments/pieces available <i>Instruction</i> Concatenate(" ", "FAC=CFS", " ", "LOC=DEFRA", " ", "QTY=", "pieces") <i>Add. Info</i> FAC=CFS LOC=DEFRA QTY=3 Instruction nr 2 <i>Condition</i> if condition 1 has no result <i>Instruction</i> Hardcode "DEFRA"
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZEP++Location+|FAC=CFS|LOC=DEFRA|QTY=3'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-DTM-FTX-LOC-SG17
0590	16	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "ZTF"
4453	Free text function code	C an..3	N	
C107	Text reference	C	C	
4441	Free text description code	M an..17	M an..17	Map Instructions Instruction nr 1 <i>Condition</i> if "images" are available on level "shipments" <i>Instruction</i> map all the links of "images" that are found in the realted shipment
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZTF++Images '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-DTM-FTX-LOC-SG17
0650	17	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /shipments/additional_api_data/cw_id or if value found shipments/hawb_number <i>Instruction</i> map "Z01"
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> if value found in /shipments/additional_api_data/cw_id or if value found shipments/hawb_number <i>Instruction</i> Hardcode "CHI"
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	N	
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**Example:**

LOC+Z01+CHI-C'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	18	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "20" List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> hardcode "4" List of valid codes 4 Air transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification	C an..35	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
	name identifier			
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Example:**

TDT+20++4'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	19	UNZ	M	1	0	Interchange trailer
------	----	------------	---	---	---	---------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNZ				
0036	Interchange control count	M n..6	M n..6	
0020	Interchange control reference	M an..14	M an..14	

Segment Remarks:

Example:
UNZ+1+X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Example Message

No	Tag	Example
01	UNH	UNH+X+IFTSTA:D:10B:UN:X:X:AA+X+9:C+X:X:X:UN+X:X:X:UN+X:X:X:UN'
02	BGM	BGM+77+CCN2954251+9'
03	LOC	LOC+193+DE:162'
	SG13	
04	CNI	CNI+1+17672387663::TransportMaster'
	SG14	
05	STS	STS+ZCN+RCV'
06	RFF	RFF+SID:f3faff73-8ae6-4192-98fa-2f9912f8fa13::PASSTHRU'
07	DTM	DTM+334:received:203'
08	FTX	FTX+ZEP++Location+ FAC=CFS LOC=DEFRA QTY=5'
09	FTX	FTX+ZTF++Images'
10	LOC	LOC+Z01+CHI FRA'
	SG17	
11	TDT	TDT+20++4'
	SG13	
12	CNI	CNI+2+cw_id'
	SG14	
13	STS	STS+ZCN+CCI'
14	DTM	DTM+334:cargo checked in:203'
15	FTX	FTX+ZEP++Location+ FAC=CFS LOC=DEFRA QTY=3'
16	FTX	FTX+ZTF++Images'
17	LOC	LOC+Z01+CHI-C'
	SG17	
18	TDT	TDT+20++4'
19	UNZ	UNZ+1+X'

No = Consecutive segment number