



Message Implementation Guideline

D_TX_XE_AUSCJHxINMV1xxINRD96BOR

based on

INVRPT

Inventory report message

UN D.96B S3

Version: 2-DEV
Variant: RITM0461522
Issue date: 21-11-2024
Author: EXT.Julfiur.Rahman



Changes Log

No		Description of Changes
01	Date (YYYY-MM-DD)	2025-01-31
	Location	SG11 / QTY / C186 . 6060
	Change Description	Change QTY-6060 element mapping as per business. removing sum logic

No = Consecutive segment number

New Changes Summary

No	Description of Changes	
01	Location	SG11 / QTY / C186 . 6060
	Instruction Number	1
	Change Flag	!2025-01-31
	Condition	If QTY.6063="17"
	Map Instruction	Map InventoryCount.Total_Qty
02	Location	SG11 / QTY / C186 . 6060
	Instruction Number	2
	Change Flag	!2025-01-31
	Condition	If QTY.6063="60"
	Map Instruction	Map InventoryCount.Total_Qty

No = Consecutive segment number

Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0010	1	UNH	M	1	0	MESSAGE HEADER
0020	2	BGM	M	1	0	Beginning of message
0030	3	FTX	C	99	1	Free text
0040	4	DTM	M	10	1	Date/time/period
0050		SG1	C	10	1	RFF-DTM
0060	5	RFF	M	1	1	Reference
0070	6	DTM	C	1	2	Date/time/period
0080		SG2	C	20	1	NAD-LOC-SG3-SG4
0090	7	NAD	M	1	1	Name and address
0100	8	LOC	C	5	2	Place/location identification
0110		SG3	C	99	2	RFF-DTM
0120	9	RFF	M	1	2	Reference
0130	10	DTM	C	1	3	Date/time/period
0140		SG4	C	10	2	CTA-COM
0150	11	CTA	M	1	2	Contact information
0160	12	COM	C	5	3	Communication contact
0170		SG5	C	5	1	CUX-DTM
0180	13	CUX	M	1	1	Currencies
0190	14	DTM	C	1	2	Date/time/period
0200		SG6	C	9999	1	CPS-SG7
0210	15	CPS	M	1	1	Consignment packing sequence
0220		SG7	C	999	2	PAC-PCI-SG8
0230	16	PAC	M	1	2	Package
0240	17	PCI	C	1000	3	Package identification
0250		SG8	C	9999	3	QTY-GIN-DTM
0260	18	QTY	M	1	3	Quantity
0270	19	GIN	C	9999	4	Goods identity number
0280	20	DTM	C	5	4	Date/time/period
0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
0300	21	LIN	M	1	1	Line item
0310	22	PIA	C	10	2	Additional product id
0320	23	IMD	C	10	2	Item description
0330	24	NAD	C	1	2	Name and address
0340	25	MEA	C	10	2	Measurements
0350	26	ALI	C	10	2	Additional information
0360	27	LOC	C	5	2	Place/location identification
0370	28	DTM	C	5	2	Date/time/period
0380	29	FTX	C	99	2	Free text

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used


Counter	No	Tag	St	MaxOcc	Level	Content
0390		SG10	C	10	2	RFF-DTM
0400	30	RFF	M	1	2	Reference
0410	31	DTM	C	1	3	Date/time/period
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0430	32	QTY	M	1	2	Quantity
0440	33	INV	C	1	3	Inventory management related details
0450	34	GIN	C	9999	3	Goods identity number
0460	35	LOC	C	5	3	Place/location identification
0470	36	DTM	C	5	3	Date/time/period
0480	37	STS	C	9	3	Status
0490		SG12	C	5	3	NAD-LOC
0500	38	NAD	M	1	3	Name and address
0510	39	LOC	C	1	4	Place/location identification
0520		SG13	C	5	3	PRI-CUX-DTM
0530	40	PRI	M	1	3	Price details
0540	41	CUX	C	1	4	Currencies
0550	42	DTM	C	1	4	Date/time/period
0560		SG14	C	10	3	RFF-DTM
0570	43	RFF	M	1	3	Reference
0580	44	DTM	C	1	4	Date/time/period
0590		SG15	C	9999	3	CPS-SG16
0600	45	CPS	M	1	3	Consignment packing sequence
0610		SG16	C	9999	4	PAC-MEA-QTY-SG17
0620	46	PAC	M	1	4	Package
0630	47	MEA	C	10	5	Measurements
0640	48	QTY	C	10	5	Quantity
0650		SG17	C	9999	5	PCI-RFF-DTM-GIN
0660	49	PCI	M	1	5	Package identification
0670	50	RFF	C	1	6	Reference
0680	51	DTM	C	5	6	Date/time/period
0690	52	GIN	C	9999	6	Goods identity number
0700	53	UNT	M	1	0	MESSAGE TRAILER

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used




Branching Diagram of Used Segments/Groups

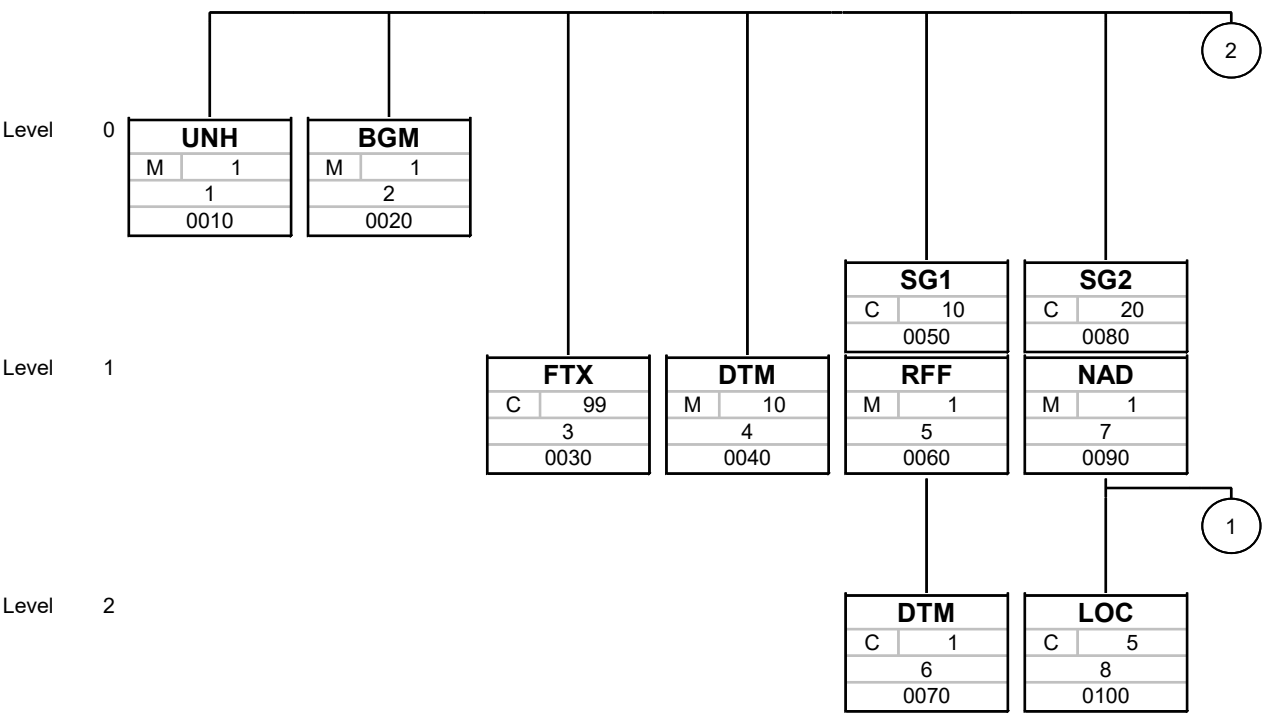


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

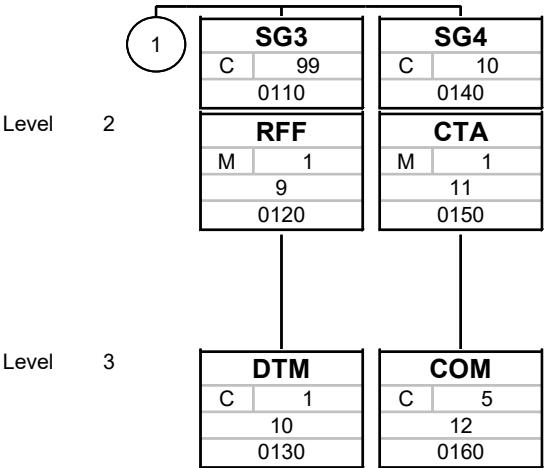

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

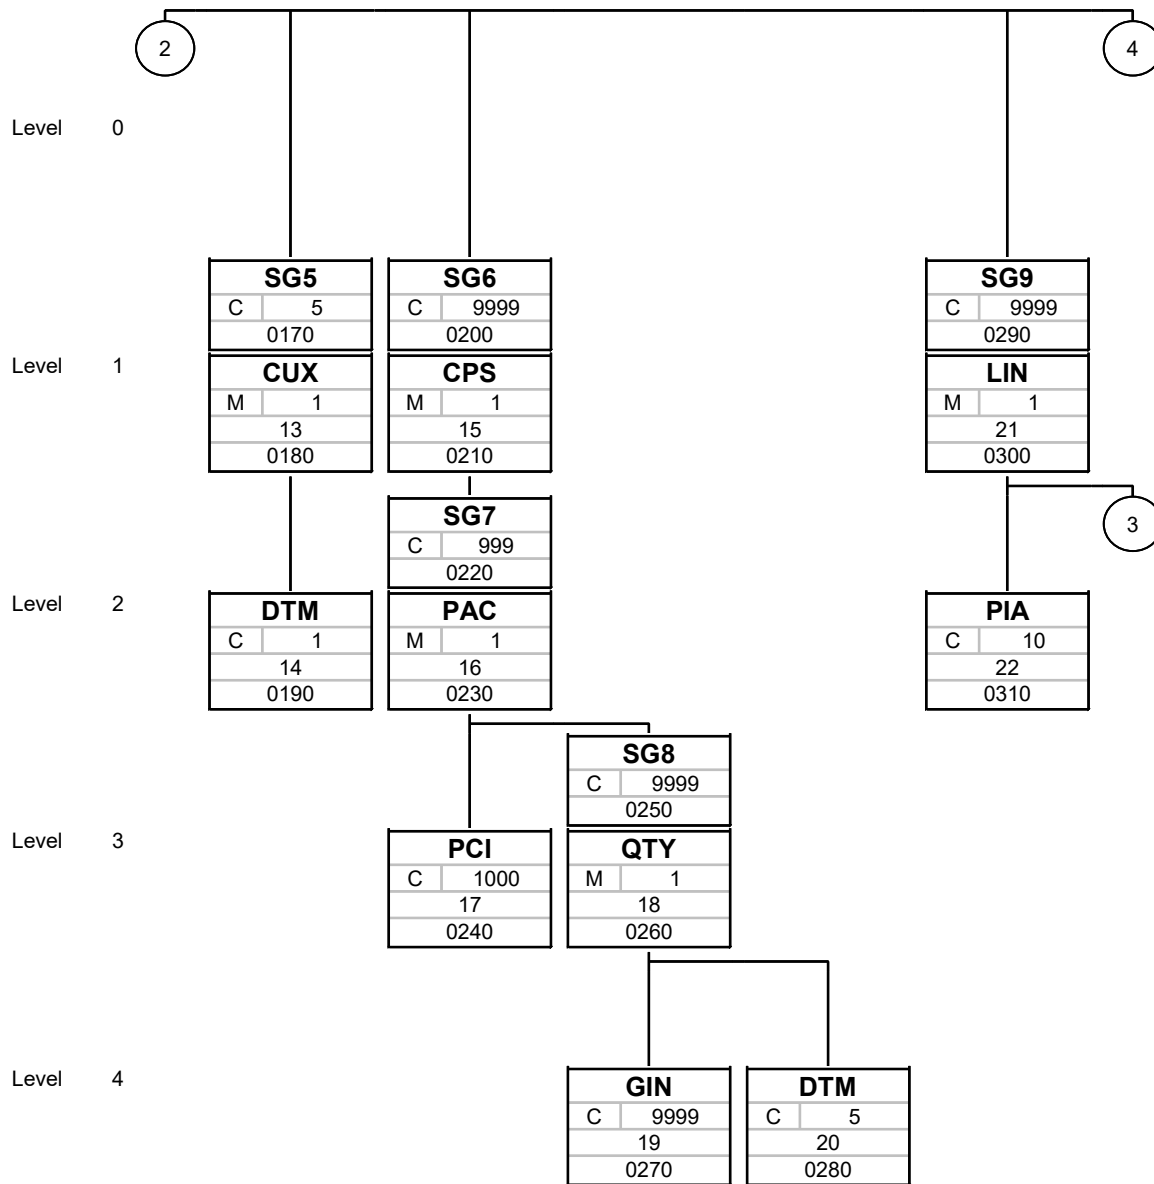

Tag
St
MaxOcc
No
Counter


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group


No = Consecutive segment number

Counter = Counter of segment/group within the standard

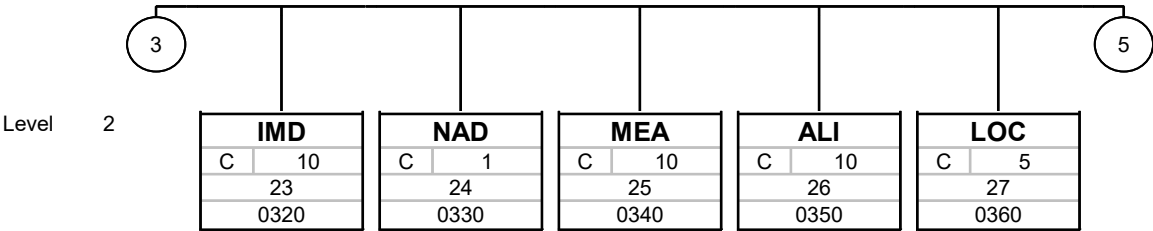


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

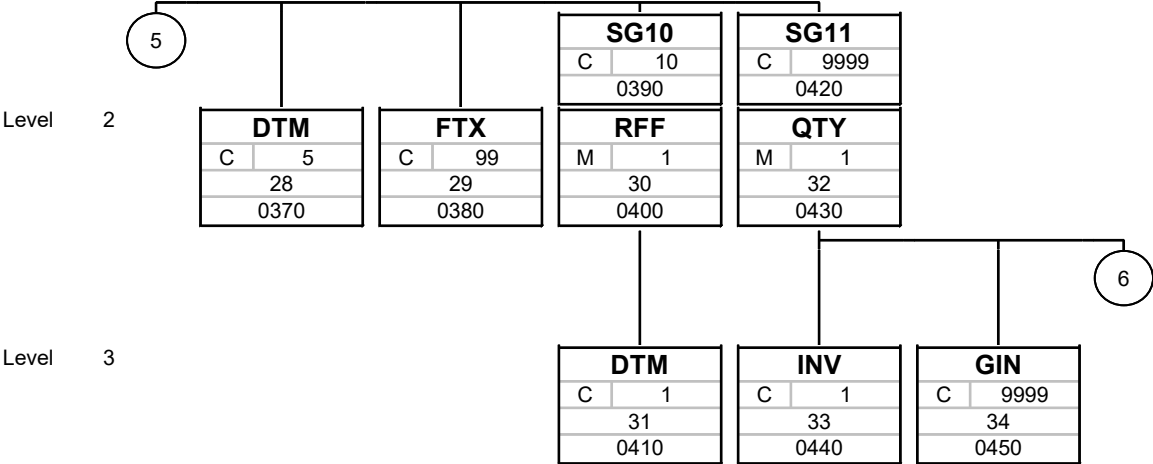


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

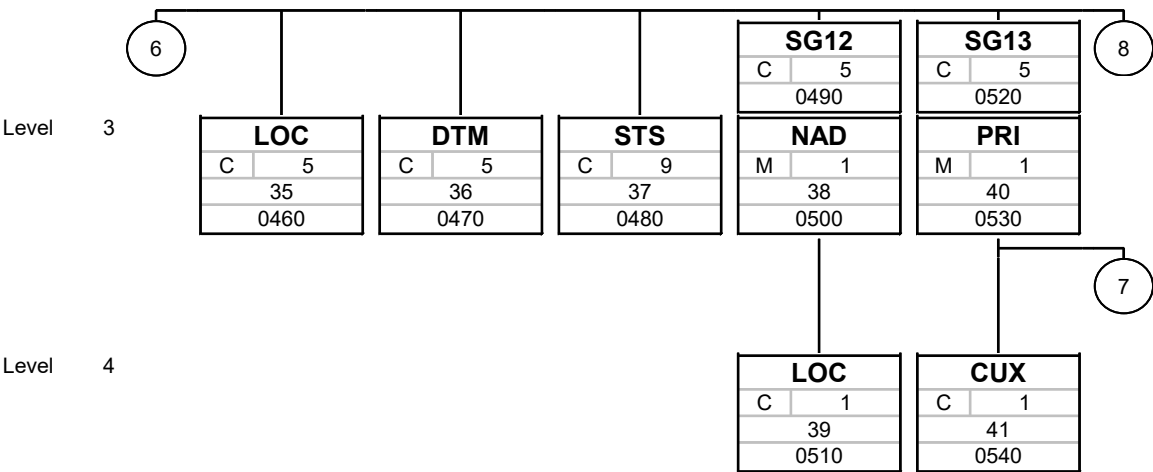


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

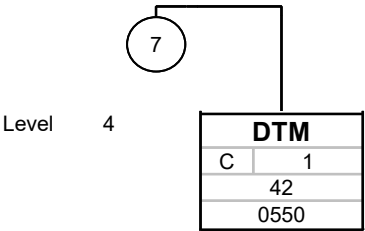


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

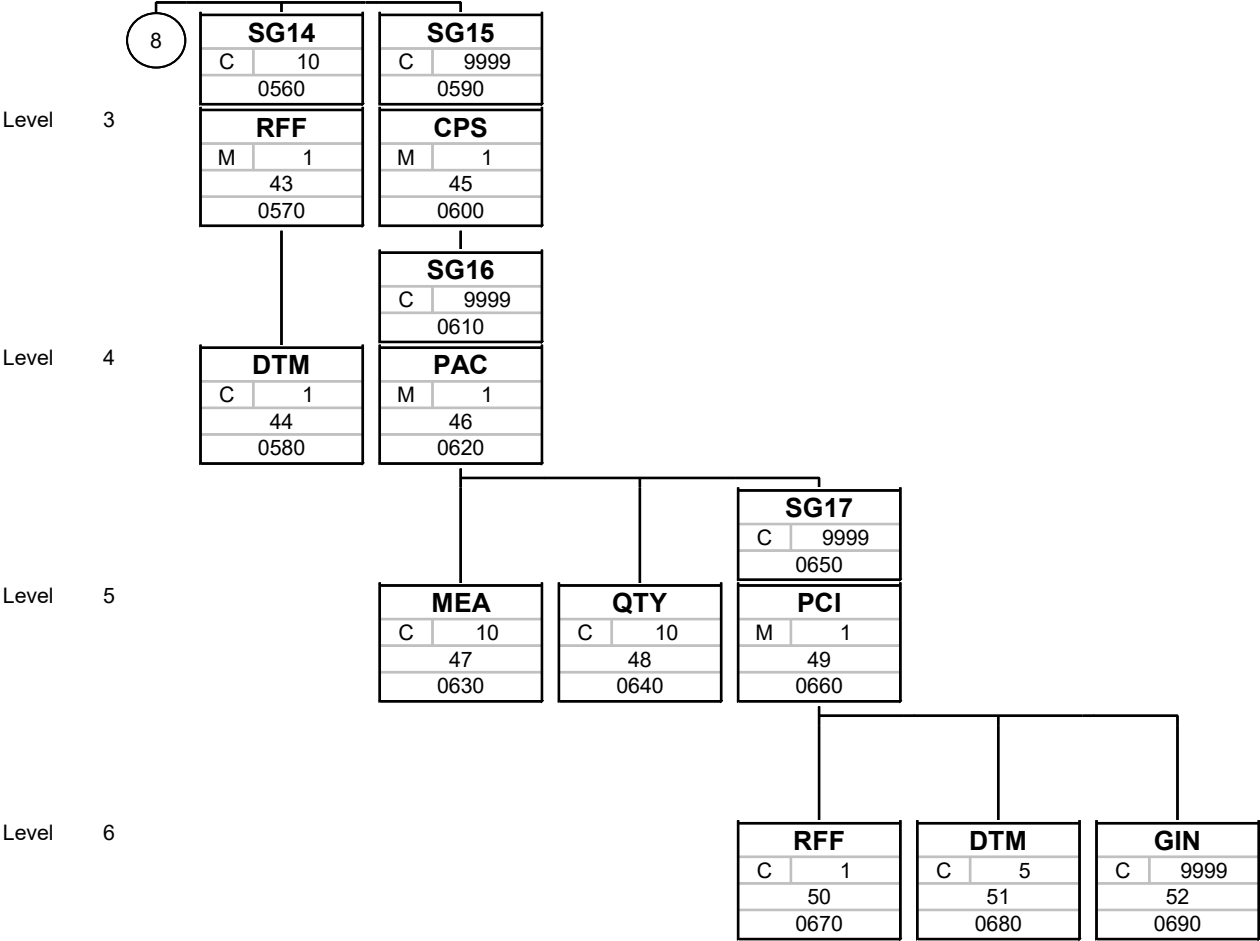

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

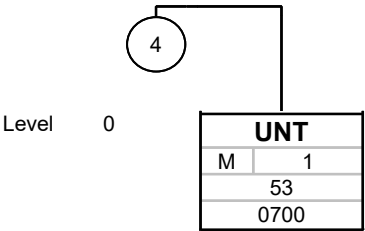

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0010	1	UNH	M	1	0	MESSAGE HEADER
------	---	------------	---	---	---	----------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	Map Instructions Instruction nr 1 <i>Instruction</i> Unique message number in sequence
S009	MESSAGE IDENTIFIER	M	M	
0065	Message type identifier	M an..6	M an..6	Map Instructions Instruction nr 1 <i>Instruction</i> "INVRPT"
0052	Message type version number	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "D"
0054	Message type release number	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "96B"
0051	Controlling agency	M an..2	M an..2	Map Instructions Instruction nr 1 <i>Instruction</i> "UN"
0057	Association assigned code	C an..6	C an..6	
0068	Common access reference	C an..35	C an..35	
S010	STATUS OF THE TRANSFER	C	C	
0070	Sequence message transfer number	M n..2	M n..2	
0073	First/last sequence message transfer indication	C a1	C a1	

Segment Remarks:

Example:

UNH+X+INVRPT:D:96B:UN:X+X+9:C'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0020	2	BGM	M	1	0	Beginning of message

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	Document/message name	C	C	
1001	Document/message name, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "35"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
1000	Document/message name	C an..35	C an..35	
C106	Document/message identification	C	C	
1004	Document/message number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Instruction</i> Map from DSV_WMS_Inventory.HEAD.Date_Time <i>Add. Info</i> Format: CCYYDDMMHMMSS
1056	Version	C an..9	C an..9	
1060	Revision number	C an..6	C an..6	
1225	Message function, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "9"
4343	Response type, coded	C an..3	C an..3	

Segment Remarks:**Example:**

BGM+1:::X+X:X:X+1+AA'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0030	3	FTX	C	99	1	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject qualifier	M an..3	M an..3	
4453	Text function, coded	C an..3	C an..3	
C107	Text reference	C	C	
4441	Free text identification	M an..17	M an..17	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..70	M an..70	
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	C an..70	
3453	Language, coded	C an..3	C an..3	

Segment Remarks:**Example:**

FTX+AAA+1+X+X:X:X:X+aa'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0040	4	DTM	M	10	1	Date/time/period
------	---	------------	---	----	---	------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "137" Instruction nr 2 <i>Instruction</i> "366"
2380	Date/time/period	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Condition</i> If DTM.2005="137" <i>Instruction</i> Map from DSV_WMS_Inventory.HEAD.Date_Time Instruction nr 2 <i>Condition</i> If DTM.2005="366" <i>Instruction</i> Map from DSV_WMS_Inventory.HEAD.Date_Time
2379	Date/time/period format qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "102"

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0050		SG1	C	10	1	RFF-DTM
0060	5	RFF	M	1	1	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	
1154	Reference number	C an..35	C an..35	
1156	Line number	C an..6	C an..6	
4000	Reference version number	C an..35	C an..35	

Segment Remarks:**Example:**

RFF+AAA:X:X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0050		SG1	C	10	1	RFF-DTM
0070	6	DTM	C	1	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG2	C	20	1	NAD-LOC-SG3-SG4
0090	7	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	C	
3124	Name and address line	M an..35	M an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3045	Party name format, coded	C an..3	C an..3	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3164	City name	C an..35	C an..35	
3229	Country sub-entity identification	C an..9	C an..9	
3251	Postcode identification	C an..9	C an..9	
3207	Country, coded	C an..3	C an..3	

Segment Remarks:**Example:**

NAD+AA+X+X:X:X:X+X:X:X:X:1+X:X:X+X+X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG2	C	20	1	NAD-LOC-SG3-SG4
0100	8	LOC	C	5	2	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Place/location qualifier	M an..3	M an..3	
C517	Location identification	C	C	
3225	Place/location identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3224	Place/location	C an..70	C an..70	
C519	Related location one identification	C	C	
3223	Related place/location one identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3222	Related place/location one	C an..70	C an..70	
C553	Related location two identification	C	C	
3233	Related place/location two identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3232	Related place/location two	C an..70	C an..70	
5479	Relation, coded	C an..3	C an..3	

Segment Remarks:**Example:**

LOC+1+X:::X+X:::X+X:::X+X '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0110		SG3	C	99	2	RFF-DTM
0120	9	RFF	M	1	2	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	
1154	Reference number	C an..35	C an..35	
1156	Line number	C an..6	C an..6	
4000	Reference version number	C an..35	C an..35	

Segment Remarks:**Example:**

RFF+AAA:X:X:X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0110		SG3	C	99	2	RFF-DTM
0130	10	DTM	C	1	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0140		SG4	C	10	2	CTA-COM
0150	11	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function, coded	C an..3	C an..3	
C056	Department or employee details	C	C	
3413	Department or employee identification	C an..17	C an..17	
3412	Department or employee	C an..35	C an..35	

Segment Remarks:**Example:**

CTA+AA+X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0140		SG4	C	10	2	CTA-COM
0160	12	COM	C	5	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication number	M an..512	M an..512	
3155	Communication channel qualifier	M an..3	M an..3	

Segment Remarks:**Example:**

COM+X:AA'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0170		SG5	C	5	1	CUX-DTM
0180	13	CUX	M	1	1	Currencies

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CUX				
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	
6345	Currency, coded	C an..3	C an..3	
6343	Currency qualifier	C an..3	C an..3	
6348	Currency rate base	C n..4	C n..4	
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	
6345	Currency, coded	C an..3	C an..3	
6343	Currency qualifier	C an..3	C an..3	
6348	Currency rate base	C n..4	C n..4	
5402	Rate of exchange	C n..12	C n..12	
6341	Currency market exchange, coded	C an..3	C an..3	

Segment Remarks:**Example:**

CUX+1:ADP:1:9+1:ADP:1:9+9+AAA'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0170		SG5	C	5	1	CUX-DTM
0190	14	DTM	C	1	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0200		SG6	C	9999	1	CPS-SG7
0210	15	CPS	M	1	1	Consignment packing sequence

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CPS				
7164	Hierarchical id. number	M an..12	M an..12	
7166	Hierarchical parent id.	C an..12	C an..12	
7075	Packaging level, coded	C an..3	C an..3	

Segment Remarks:**Example:**

CPS+X+X+1 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0220		SG7	C	999	2	PAC-PCI-SG8
0230	16	PAC	M	1	2	Package

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PAC				
7224	Number of packages	C n..8	C n..8	
C531	Packaging details	C	C	
7075	Packaging level, coded	C an..3	C an..3	
7233	Packaging related information, coded	C an..3	C an..3	
7073	Packaging terms and conditions, coded	C an..3	C an..3	
C202	Package type	C	C	
7065	Type of packages identification	C an..17	C an..17	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
7064	Type of packages	C an..35	C an..35	
C402	Package type identification	C	C	
7077	Item description type, coded	M an..3	M an..3	
7064	Type of packages	M an..35	M an..35	
7143	Item number type, coded	C an..3	C an..3	
7064	Type of packages	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
C532	Returnable package details	C	C	
8395	Returnable package freight payment responsibility, coded	C an..3	C an..3	
8393	Returnable package load contents, coded	C an..3	C an..3	

Segment Remarks:**Example:**

PAC+9+1:34:1+1A1::X+A:X:AA:X:AA+1:1'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0220		SG7	C	999	2	PAC-PCI-SG8
0240	17	PCI	C	1000	3	Package identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PCI				
4233	Marking instructions, coded	C an..3	C an..3	
C210	Marks & labels	C	C	
7102	Shipping marks	M an..35	M an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
8275	Container/package status, coded	C an..3	C an..3	
C827	Type of marking	C	C	
7511	Type of marking, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	

Segment Remarks:**Example:**

PCI+1+X:X:X:X:X:X:X:X:X+1+X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0250		SG8	C	9999	3	QTY-GIN-DTM
0260	18	QTY	M	1	3	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	Quantity details	M	M	
6063	Quantity qualifier	M an..3	M an..3	
6060	Quantity	M n..15	M n..15	
6411	Measure unit qualifier	C an..3	C an..3	

Segment Remarks:

Example:
QTY+1:9:04'

Counter	No	Tag	St	MaxOcc	Level	Name
0250		SG8	C	9999	3	QTY-GIN-DTM
0270	19	GIN	C	9999	4	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Identity number qualifier	M an..3	M an..3	
C208	Identity number range	M	M	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	

Segment Remarks:**Example:**

GIN+AA+X:X+X:X+X:X+X:X+X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0250		SG8	C	9999	3	QTY-GIN-DTM
0280	20	DTM	C	5	4	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2 : X : 2 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
		Map Instructions Instruction nr 1 <i>Instruction</i> Repeat this loop for every InventoryCount loop in the input file				
0300	21	LIN	M	1	1	Line item

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LIN				
1082	Line item number	C n..6	C n..6	Map Instructions Instruction nr 1 <i>Instruction</i> Increment for every count of InventoryCount loop in the input data
1229	Action request/notification, coded	C an..3	C an..3	
C212	Item number identification	C	C	
7140	Item number	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C829	Sub-line information	C	C	
5495	Sub-line indicator, coded	C an..3	C an..3	
1082	Line item number	C n..6	C n..6	
1222	Configuration level	C n..2	C n..2	
7083	Configuration, coded	C an..3	C an..3	

Segment Remarks:**Example:**

LIN+9+1+X:AA+1:9+9+A'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
		Map Instructions Instruction nr 1 <i>Instruction</i> Repeat this loop for every InventoryCount loop in the input file				
0310	22	PIA	C	10	2	Additional product id

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PIA				
4347	Product id. function qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "1"
C212	Item number identification	M	M	
7140	Item number	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Instruction</i> Map from Inventory.InventoryCount.SKU_ID
7143	Item number type, coded	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "VN"
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C212	Item number identification	C	C	
7140	Item number	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C212	Item number identification	C	C	
7140	Item number	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C212	Item number identification	C	C	
7140	Item number	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C212	Item number identification	C	C	
7140	Item number	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
1131	Code list qualifier	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3055	Code list responsible agency, coded	C an..3	N	

Segment Remarks:

Example:

PIA+1+X:AA+X:AA+X:AA+X:AA+X:AA '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
------	--	------------	---	------	---	---

Map Instructions

Instruction nr 1

Instruction Repeat this loop for every InventoryCount loop in the input file

0320	23	IMD	C	10	2	Item description
------	----	------------	---	----	---	------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IMD				
7077	Item description type, coded	C an..3	C an..3	
7081	Item characteristic, coded	C an..3	C an..3	
C273	Item description	C	C	
7009	Item description identification	C an..17	C an..17	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
7008	Item description	C an..35	C an..35	
7008	Item description	C an..35	C an..35	
3453	Language, coded	C an..3	C an..3	
7383	Surface/layer indicator, coded	C an..3	C an..3	

Segment Remarks:

Example:

IMD+A+1+X:::X:X:aa+1S'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
		Map Instructions				
		Instruction nr 1				
		<i>Instruction</i> Repeat this loop for every InventoryCount loop in the input file				
0330	24	NAD	C	1	2	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	C	
3124	Name and address line	M an..35	M an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3045	Party name format, coded	C an..3	C an..3	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3164	City name	C an..35	C an..35	
3229	Country sub-entity identification	C an..9	C an..9	
3251	Postcode identification	C an..9	C an..9	
3207	Country, coded	C an..3	C an..3	

Segment Remarks:**Example:**

NAD+AA+X+X:X:X:X+X:X:X:X:X:1+X:X:X:X+X+X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0290 **SG9** C 9999 1 LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11

Map Instructions

Instruction nr 1

Instruction Repeat this loop for every InventoryCount loop in the input file

0340 25 **MEA** C 10 2 **Measurements**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement application qualifier	M an..3	M an..3	
C502	Measurement details	C	C	
6313	Measurement dimension, coded	C an..3	C an..3	
6321	Measurement significance, coded	C an..3	C an..3	
6155	Measurement attribute identification	C an..17	C an..17	
6154	Measurement attribute	C an..70	C an..70	
C174	Value/range	C	C	
6411	Measure unit qualifier	M an..3	M an..3	
6314	Measurement value	C an..18	C an..18	
6162	Range minimum	C n..18	C n..18	
6152	Range maximum	C n..18	C n..18	
6432	Significant digits	C n..2	C n..2	
7383	Surface/layer indicator, coded	C an..3	C an..3	

Segment Remarks:

Example:

MEA+AAA+A:3:1:X+04:X:9:9:9+1S'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
Map Instructions						
Instruction nr 1						
<i>Instruction</i> Repeat this loop for every InventoryCount loop in the input file						
0350	26	ALI	C	10	2	Additional information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
ALI				
3239	Country of origin, coded	C an..3	C an..3	
9213	Type of duty regime, coded	C an..3	C an..3	
4183	Special conditions, coded	C an..3	C an..3	
4183	Special conditions, coded	C an..3	C an..3	
4183	Special conditions, coded	C an..3	C an..3	
4183	Special conditions, coded	C an..3	C an..3	
4183	Special conditions, coded	C an..3	C an..3	

Segment Remarks:**Example:**

ALI+AD+1+1+1+1+1+1 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0290 **SG9** C 9999 1 LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11

Map Instructions

Instruction nr 1

Instruction Repeat this loop for every InventoryCount loop in the input file

0360 27 **LOC** C 5 2 Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Place/location qualifier	M an..3	M an..3	
C517	Location identification	C	C	
3225	Place/location identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3224	Place/location	C an..70	C an..70	
C519	Related location one identification	C	C	
3223	Related place/location one identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3222	Related place/location one	C an..70	C an..70	
C553	Related location two identification	C	C	
3233	Related place/location two identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3232	Related place/location two	C an..70	C an..70	
5479	Relation, coded	C an..3	C an..3	

Segment Remarks:

Example:

LOC+1+X::X+X::X+X::X+X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0290 **SG9** C 9999 1 LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11

Map Instructions

Instruction nr 1

Instruction Repeat this loop for every InventoryCount loop in the input file

0370 28 **DTM** C 5 2 Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:

Example:

DTM+2:X:2'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0290		SG9	C	9999	1	LIN-PIA-IMD-NAD-MEA-ALI-LOC-DTM-FTX-SG10-SG11
		Map Instructions				
		Instruction nr 1				
		<i>Instruction</i> Repeat this loop for every InventoryCount loop in the input file				
0380	29	FTX	C	99	2	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject qualifier	M an..3	M an..3	
4453	Text function, coded	C an..3	C an..3	
C107	Text reference	C	C	
4441	Free text identification	M an..17	M an..17	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..70	M an..70	
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	C an..70	
4440	Free text	C an..70	C an..70	
3453	Language, coded	C an..3	C an..3	

Segment Remarks:**Example:**

FTX+AAA+1+X+X:X:X:X+aa '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0390		SG10	C	10	2	RFF-DTM
0400	30	RFF	M	1	2	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	
1154	Reference number	C an..35	C an..35	
1156	Line number	C an..6	C an..6	
4000	Reference version number	C an..35	C an..35	

Segment Remarks:**Example:**

RFF+AAA:X:X:X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0390		SG10	C	10	2	RFF-DTM
0410	31	DTM	C	1	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0430	32	QTY	M	1	2	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	Quantity details	M	M	
6063	Quantity qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> Map "17" Instruction nr 2 <i>Instruction</i> Map "60"
6060	Quantity	M n..15	M n..15	Map Instructions Instruction nr 1 !2025-01-31 <i>Condition</i> If QTY.6063="17" <i>Instruction</i> Map InventoryCount.Total_Qty Instruction nr 2 !2025-01-31 <i>Condition</i> If QTY.6063="60" <i>Instruction</i> Map InventoryCount.Total_Qty
6411	Measure unit qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "EA"

Segment Remarks:**Example:**

QTY+1:9:04'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0440	33	INV	C	1	3	Inventory management related details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
INV				
4501	Inventory movement direction, coded	C an..3	C an..3	
7491	Type of inventory affected, coded	C an..3	C an..3	
4499	Reason for inventory movement, coded	C an..3	C an..3	
4503	Inventory balance method, coded	C an..3	C an..3	
C522	Instruction	C	C	
4403	Instruction qualifier	M an..3	M an..3	
4401	Instruction, coded	C an..3	C an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
4400	Instruction	C an..35	C an..35	

Segment Remarks:**Example:**

INV+1+1+1+1+1:AA:::X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0450	34	GIN	C	9999	3	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Identity number qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "BX"
C208	Identity number range	M	M	
7402	Identity number	M an..35	M an..35	Map Instructions Instruction nr 1 <i>Instruction</i> Map from Inventory.InventoryCount.Batch_Id
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	

Segment Remarks:**Example:**

GIN+AA+X:X+X:X+X:X+X:X+X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0460	35	LOC	C	5	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Place/location qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "19"
C517	Location identification	C	C	
3225	Place/location identification	C an..25	C an..25	Map Instructions Instruction nr 1 <i>Condition</i> If data found inodelist DSV_CL_AUSCJ_RECADV_OB_SITEID_EE_cl for RECEIVERCODE where SENDERCODE is Inventory.InventoryCount.Site_Id <i>Instruction</i> Map RECEIVERCODE, else map from Inventory. InventoryCount.Site_Id
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3224	Place/location	C an..70	C an..70	
C519	Related location one identification	C	C	
3223	Related place/location one identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3222	Related place/location one	C an..70	C an..70	
C553	Related location two identification	C	C	
3233	Related place/location two identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3232	Related place/location two	C an..70	C an..70	
5479	Relation, coded	C an..3	C an..3	

Segment Remarks:**Example:**

LOC+1+X:::X+X:::X+X:::X+X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0470	36	DTM	C	5	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "36"
2380	Date/time/period	C an..35	C an..35	Map Instructions Instruction nr 1 <i>Instruction</i> Map from Inventory.InventoryCount.Expiry_Date <i>Add. Info</i> Format CCYMMDD
2379	Date/time/period format qualifier	C an..3	C an..3	Map Instructions Instruction nr 1 <i>Instruction</i> "102"

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0420		SG11	C	9999	2	QTY-INV-GIN-LOC-DTM-STS-SG12-SG13-SG14-SG15
0480	37	STS	C	9	3	Status

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
STS				
C601	Status type	C	C	
9015	Status type, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C555	Status event	C	C	
9011	Status event, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
9010	Status event	C an..35	C an..35	
C556	Status reason	C	C	
9013	Status reason, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
9012	Status reason	C an..35	C an..35	
C556	Status reason	C	C	
9013	Status reason, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
9012	Status reason	C an..35	C an..35	
C556	Status reason	C	C	
9013	Status reason, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
9012	Status reason	C an..35	C an..35	
C556	Status reason	C	C	
9013	Status reason, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
9012	Status reason	C an..35	C an..35	
C556	Status reason	C	C	
9013	Status reason, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
9012	Status reason	C an..35	C an..35	

Segment Remarks:**Example:**

STS+1+1::X+1::X+1::X+1::X+1::X+1::X+1::X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0490		SG12	C	5	3	NAD-LOC
0500	38	NAD	M	1	3	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	
C082	Party identification details	C	C	
3039	Party id. identification	M an..35	M an..35	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
C058	Name and address	C	C	
3124	Name and address line	M an..35	M an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
3124	Name and address line	C an..35	C an..35	
C080	Party name	C	C	
3036	Party name	M an..35	M an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	C an..35	
3045	Party name format, coded	C an..3	C an..3	
C059	Street	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3042	Street and number/p.o. box	C an..35	C an..35	
3164	City name	C an..35	C an..35	
3229	Country sub-entity identification	C an..9	C an..9	
3251	Postcode identification	C an..9	C an..9	
3207	Country, coded	C an..3	C an..3	

Segment Remarks:**Example:**

NAD+AA+X+X:X:X:X+X:X:X:X:1+X:X:X+X+X+AD'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0490		SG12	C	5	3	NAD-LOC
0510	39	LOC	C	1	4	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Place/location qualifier	M an..3	M an..3	
C517	Location identification	C	C	
3225	Place/location identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3224	Place/location	C an..70	C an..70	
C519	Related location one identification	C	C	
3223	Related place/location one identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3222	Related place/location one	C an..70	C an..70	
C553	Related location two identification	C	C	
3233	Related place/location two identification	C an..25	C an..25	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
3232	Related place/location two	C an..70	C an..70	
5479	Relation, coded	C an..3	C an..3	

Segment Remarks:**Example:**

LOC+1+X:::X+X:::X+X:::X+X '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0520		SG13	C	5	3	PRI-CUX-DTM
0530	40	PRI	M	1	3	Price details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PRI				
C509	Price information	C	C	
5125	Price qualifier	M an..3	M an..3	
5118	Price	C n..15	C n..15	
5375	Price type, coded	C an..3	C an..3	
5387	Price type qualifier	C an..3	C an..3	
5284	Unit price basis	C n..9	C n..9	
6411	Measure unit qualifier	C an..3	C an..3	
5213	Sub-line price change, coded	C an..3	C an..3	

Segment Remarks:**Example:**

PRI+AAA:9:AA:AAA:9:04+A'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0520		SG13	C	5	3	PRI-CUX-DTM
0540	41	CUX	C	1	4	Currencies

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CUX				
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	
6345	Currency, coded	C an..3	C an..3	
6343	Currency qualifier	C an..3	C an..3	
6348	Currency rate base	C n..4	C n..4	
C504	Currency details	C	C	
6347	Currency details qualifier	M an..3	M an..3	
6345	Currency, coded	C an..3	C an..3	
6343	Currency qualifier	C an..3	C an..3	
6348	Currency rate base	C n..4	C n..4	
5402	Rate of exchange	C n..12	C n..12	
6341	Currency market exchange, coded	C an..3	C an..3	

Segment Remarks:**Example:**

CUX+1:ADP:1:9+1:ADP:1:9+9+AAA'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0520		SG13	C	5	3	PRI-CUX-DTM
0550	42	DTM	C	1	4	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0560		SG14	C	10	3	RFF-DTM
0570	43	RFF	M	1	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	
1154	Reference number	C an..35	C an..35	
1156	Line number	C an..6	C an..6	
4000	Reference version number	C an..35	C an..35	

Segment Remarks:**Example:**

RFF+AAA:X:X:X'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0560		SG14	C	10	3	RFF-DTM
0580	44	DTM	C	1	4	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2:X:2'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0590		SG15	C	9999	3	CPS-SG16
0600	45	CPS	M	1	3	Consignment packing sequence

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CPS				
7164	Hierarchical id. number	M an..12	M an..12	
7166	Hierarchical parent id.	C an..12	C an..12	
7075	Packaging level, coded	C an..3	C an..3	

Segment Remarks:

Example:
CPS+X+X+1 '



Counter	No	Tag	St	MaxOcc	Level	Name
0610		SG16	C	9999	4	PAC-MEA-QTY-SG17
0620	46	PAC	M	1	4	Package

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PAC				
7224	Number of packages	C n..8	C n..8	
C531	Packaging details	C	C	
7075	Packaging level, coded	C an..3	C an..3	
7233	Packaging related information, coded	C an..3	C an..3	
7073	Packaging terms and conditions, coded	C an..3	C an..3	
C202	Package type	C	C	
7065	Type of packages identification	C an..17	C an..17	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	
7064	Type of packages	C an..35	C an..35	
C402	Package type identification	C	C	
7077	Item description type, coded	M an..3	M an..3	
7064	Type of packages	M an..35	M an..35	
7143	Item number type, coded	C an..3	C an..3	
7064	Type of packages	C an..35	C an..35	
7143	Item number type, coded	C an..3	C an..3	
C532	Returnable package details	C	C	
8395	Returnable package freight payment responsibility, coded	C an..3	C an..3	
8393	Returnable package load contents, coded	C an..3	C an..3	

Segment Remarks:**Example:**

PAC+9+1:34:1+1A1::X+A:X:AA:X:AA+1:1'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0610		SG16	C	9999	4	PAC-MEA-QTY-SG17
0630	47	MEA	C	10	5	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement application qualifier	M an..3	M an..3	
C502	Measurement details	C	C	
6313	Measurement dimension, coded	C an..3	C an..3	
6321	Measurement significance, coded	C an..3	C an..3	
6155	Measurement attribute identification	C an..17	C an..17	
6154	Measurement attribute	C an..70	C an..70	
C174	Value/range	C	C	
6411	Measure unit qualifier	M an..3	M an..3	
6314	Measurement value	C an..18	C an..18	
6162	Range minimum	C n..18	C n..18	
6152	Range maximum	C n..18	C n..18	
6432	Significant digits	C n..2	C n..2	
7383	Surface/layer indicator, coded	C an..3	C an..3	

Segment Remarks:**Example:**

MEA+AAA+A:3:1:X+04:X:9:9:9+1S'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0610		SG16	C	9999	4	PAC-MEA-QTY-SG17
0640	48	QTY	C	10	5	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	Quantity details	M	M	
6063	Quantity qualifier	M an..3	M an..3	
6060	Quantity	M n..15	M n..15	
6411	Measure unit qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

QTY+1:9:04'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0650		SG17	C	9999	5	PCI-RFF-DTM-GIN
0660	49	PCI	M	1	5	Package identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PCI				
4233	Marking instructions, coded	C an..3	C an..3	
C210	Marks & labels	C	C	
7102	Shipping marks	M an..35	M an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
7102	Shipping marks	C an..35	C an..35	
8275	Container/package status, coded	C an..3	C an..3	
C827	Type of marking	C	C	
7511	Type of marking, coded	M an..3	M an..3	
1131	Code list qualifier	C an..3	N	
3055	Code list responsible agency, coded	C an..3	N	

Segment Remarks:**Example:**

PCI+1+X:X:X:X:X:X:X:X:X+1+X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0650		SG17	C	9999	5	PCI-RFF-DTM-GIN
0670	50	RFF	C	1	6	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference qualifier	M an..3	M an..3	
1154	Reference number	C an..35	C an..35	
1156	Line number	C an..6	C an..6	
4000	Reference version number	C an..35	C an..35	

Segment Remarks:**Example:**

RFF+AAA:X:X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0650		SG17	C	9999	5	PCI-RFF-DTM-GIN
0680	51	DTM	C	5	6	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	
2380	Date/time/period	C an..35	C an..35	
2379	Date/time/period format qualifier	C an..3	C an..3	

Segment Remarks:**Example:**

DTM+2 : X : 2 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0650		SG17	C	9999	5	PCI-RFF-DTM-GIN
0690	52	GIN	C	9999	6	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Identity number qualifier	M an..3	M an..3	
C208	Identity number range	M	M	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Identity number	M an..35	M an..35	
7402	Identity number	C an..35	C an..35	

Segment Remarks:**Example:**

GIN+AA+X:X+X:X+X:X+X:X+X:X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Counter	No	Tag	St	MaxOcc	Level	Name
0700	53	UNT	M	1	0	MESSAGE TRAILER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNT				
0074	Number of segments in a message	M n..6	M n..6	Map Instructions Instruction nr 1 <i>Instruction</i> Count and map number of lines from UNH to UNT loop
0062	Message reference number	M an..14	M an..14	Map Instructions Instruction nr 1 <i>Instruction</i> Map UNH.01

Segment Remarks:**Example:**

UNT+53+X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Example Message

No	Tag	Example
01	UNH	UNH+X+INVRPT:D:96B:UN:X+X+9:C'
02	BGM	BGM+1:::X+X:X:X+1+AA'
03	FTX	FTX+AAA+1+X+X:X:X:X+aa'
04	DTM	DTM+2:X:2'
SG1		
05	RFF	RFF+AAA:X:X:X'
06	DTM	DTM+2:X:2'
SG2		
07	NAD	NAD+AA+X+X:X:X:X:X:X:X:X:X:1+X:X:X:X+X+X+AD'
08	LOC	LOC+1+X:::X+X:::X+X:::X+X'
SG3		
09	RFF	RFF+AAA:X:X:X'
10	DTM	DTM+2:X:2'
SG4		
11	CTA	CTA+AA+X:X'
12	COM	COM+X:AA'
SG5		
13	CUX	CUX+1:ADP:1:9+1:ADP:1:9+9+AAA'
14	DTM	DTM+2:X:2'
SG6		
15	CPS	CPS+X+X+1'
SG7		
16	PAC	PAC+9+1:34:1+1A1:::X+A:X:AA:X:AA+1:1'
17	PCI	PCI+1+X:X:X:X:X:X:X:X:X+1+X'
SG8		
18	QTY	QTY+1:9:04'
19	GIN	GIN+AA+X:X+X:X+X:X+X:X'
20	DTM	DTM+2:X:2'
SG9		
21	LIN	LIN+9+1+X:AA+1:9+9+A'
22	PIA	PIA+1+X:AA+X:AA+X:AA+X:AA+X:AA'
23	IMD	IMD+A+1+X:::X:X:aa+1S'
24	NAD	NAD+AA+X+X:X:X:X:X:X:X:X:1+X:X:X:X+X+X+AD'
25	MEA	MEA+AAA+A:3:1:X+04:X:9:9+1S'
26	ALI	ALI+AD+1+1+1+1+1+1'

No = Consecutive segment number

No	Tag	Example
27	LOC	LOC+1+X::X+X::X+X::X+X'
28	DTM	DTM+2:X:2'
29	FTX	FTX+AAA+1+X+X:X:X:X+aa'
SG10		
30	RFF	RFF+AAA:X:X:X'
31	DTM	DTM+2:X:2'
SG11		
32	QTY	QTY+1:9:04'
33	INV	INV+1+1+1+1+1:AA::X'
34	GIN	GIN+AA+X:X+X:X+X:X+X:X+X'
35	LOC	LOC+1+X::X+X::X+X::X+X'
36	DTM	DTM+2:X:2'
37	STS	STS+1+1::X+1::X+1::X+1::X+1::X+1::X'
SG12		
38	NAD	NAD+AA+X+X:X:X:X+X:X:X:X:X:1+X:X:X:X+X+X+AD'
39	LOC	LOC+1+X::X+X::X+X::X+X'
SG13		
40	PRI	PRI+AAA:9:AA:AAA:9:04+A'
41	CUX	CUX+1:ADP:1:9+1:ADP:1:9+9+AAA'
42	DTM	DTM+2:X:2'
SG14		
43	RFF	RFF+AAA:X:X:X'
44	DTM	DTM+2:X:2'
SG15		
45	CPS	CPS+X+X+1'
SG16		
46	PAC	PAC+9+1:34:1+1A1::X+A:X:AA:X:AA+1:1'
47	MEA	MEA+AAA+A:3:1:X+04:X:9:9:9+1S'
48	QTY	QTY+1:9:04'
SG17		
49	PCI	PCI+1+X:X:X:X:X:X:X:X:X+1+X'
50	RFF	RFF+AAA:X:X:X'
51	DTM	DTM+2:X:2'
52	GIN	GIN+AA+X:X+X:X+X:X+X:X+X'
53	UNT	UNT+53+X'

No = Consecutive segment number