

```
#include <iodefine.h>
```



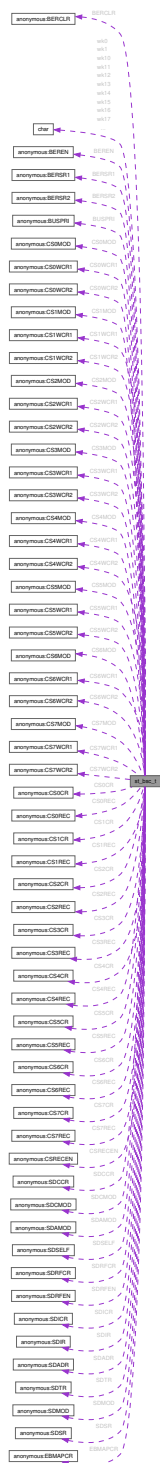

union { ... } st_bsc_t::BERCLR

union { ... } st_bsc_t::BEREN

union { ... } st_bsc_t::BERSR1

union { ... } st_bsc_t::BERSR2

union { ... } st_bsc_t::BUSPRI

union { ... } st_bsc_t::CS0CR

union { ... } st_bsc_t::CS0MOD

union { ... } st_bsc_t::CS0REC

union { ... } st_bsc_t::CS0WCR1

union { ... } st_bsc_t::CS0WCR2

union { ... } st_bsc_t::CS1CR

union { ... } st_bsc_t::CS1MOD

union { ... } st_bsc_t::CS1REC

union { ... } st_bsc_t::CS1WCR1

union { ... } st_bsc_t::CS1WCR2

union { ... } st_bsc_t::CS2CR

union { ... } st_bsc_t::CS2MOD

union { ... } st_bsc_t::CS2REC

union { ... } st_bsc_t::CS2WCR1

union { ... } st_bsc_t::CS2WCR2

union { ... } st_bsc_t::CS3CR

union { ... } st_bsc_t::CS3MOD

union { ... } st_bsc_t::CS3REC

union { ... } st_bsc_t::CS3WCR1

union { ... } st_bsc_t::CS3WCR2

union { ... } st_bsc_t::CS4CR

union { ... } st_bsc_t::CS4MOD

union { ... } st_bsc_t::CS4REC

union { ... } st_bsc_t::CS4WCR1

union { ... } st_bsc_t::CS4WCR2

union { ... } st_bsc_t::CS5CR

union { ... } st_bsc_t::CS5MOD

union { ... } st_bsc_t::CS5REC

union { ... } st_bsc_t::CS5WCR1

union { ... } st_bsc_t::CS5WCR2

union { ... } st_bsc_t::CS6CR

union { ... } st_bsc_t::CS6MOD

union { ... } st_bsc_t::CS6REC

union { ... } st_bsc_t::CS6WCR1

union { ... } st_bsc_t::CS6WCR2

union { ... } st_bsc_t::CS7CR

union { ... } st_bsc_t::CS7MOD

union { ... } st_bsc_t::CS7REC

union { ... } st_bsc_t::CS7WCR1

union { ... } st_bsc_t::CS7WCR2

union { ... } st_bsc_t::CSRECEN

union { ... } st_bsc_t::EBMAPCR

union { ... } st_bsc_t::SDADR

union { ... } st_bsc_t::SDAMOD

union { ... } st_bsc_t::SDCCR

union { ... } st_bsc_t::SDCMOD

union { ... } st_bsc_t::SDICR

union { ... } st_bsc_t::SDIR

union { ... } st_bsc_t::SDMOD

union { ... } st_bsc_t::SDRFCR

union { ... } st_bsc_t::SDRFEN

union { ... } st_bsc_t::SDSELF

union { ... } st_bsc_t::SDSR

union { ... } st_bsc_t::SDTR

char st_bsc_t::wk0[3]

char st_bsc_t::wk1[3]

char st_bsc_t::wk10[6]

char st_bsc_t::wk11[6]

char st_bsc_t::wk12[1926]

char st_bsc_t::wk13[6]

char st_bsc_t::wk14[6]

char st_bsc_t::wk15[6]

char st_bsc_t::wk16[6]

char st_bsc_t::wk17[6]

char st_bsc_t::wk18[6]

char st_bsc_t::wk19[6]

char st_bsc_t::wk2[1]

char st_bsc_t::wk20[6]

char st_bsc_t::wk21[6]

char st_bsc_t::wk22[6]

char st_bsc_t::wk23[6]

char st_bsc_t::wk24[6]

char st_bsc_t::wk25[6]

char st_bsc_t::wk26[6]

char st_bsc_t::wk27[6]

char st_bsc_t::wk28[4]

char st_bsc_t::wk29[894]

char st_bsc_t::wk3[4]

char st_bsc_t::wk30[13]

char st_bsc_t::wk31[3]

char st_bsc_t::wk32[9]

char st_bsc_t::wk33[3]

char st_bsc_t::wk34[26]

char st_bsc_t::wk35[3]

char st_bsc_t::wk36[6]

char st_bsc_t::wk37[269231]

```
char st_bsc_t::wk4[7408]
```

```
char st_bsc_t::wk5[6]
```


```
char st_bsc_t::wk6[6]
```

```
char st_bsc_t::wk7[6]
```

```
char st_bsc_t::wk8[6]
```

```
char st_bsc_t::wk9[6]
```

```
#include <iodef.h>
```

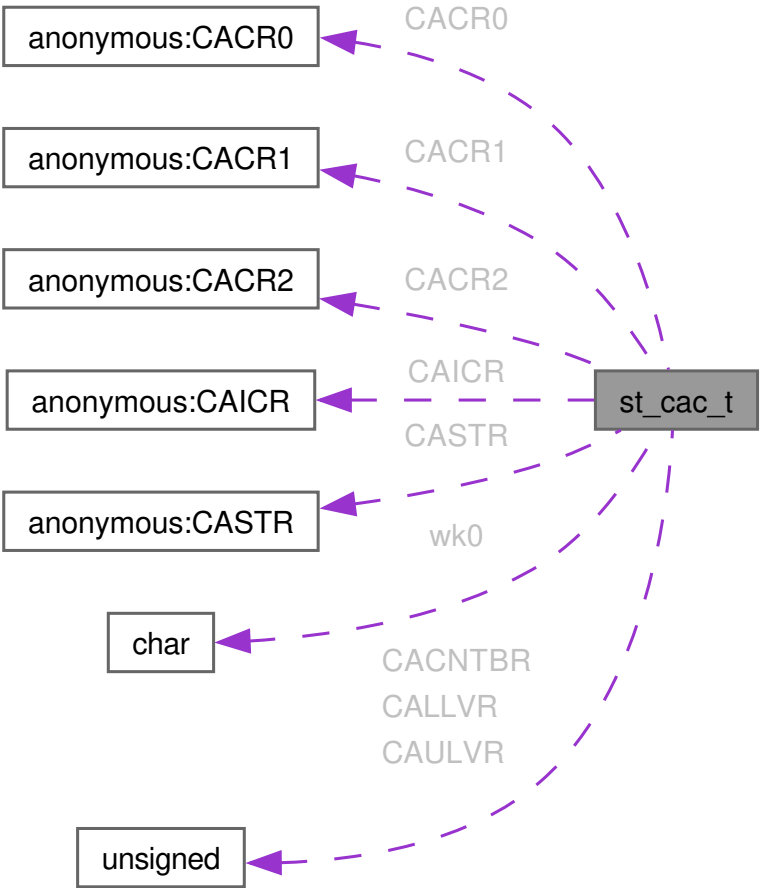

unsigned short st_cac_t::CACNTBR

union { ... } st_cac_t::CACR0

union { ... } st_cac_t::CACR1

union { ... } st_cac_t::CACR2

union { ... } st_cac_t::CAICR


unsigned short st_cac_t::CALLVR

union { ... } st_cac_t::CASTR

unsigned short st_cac_t::CAULVR

char st_cac_t::wk0[1]

```
#include <iodefine.h>
```

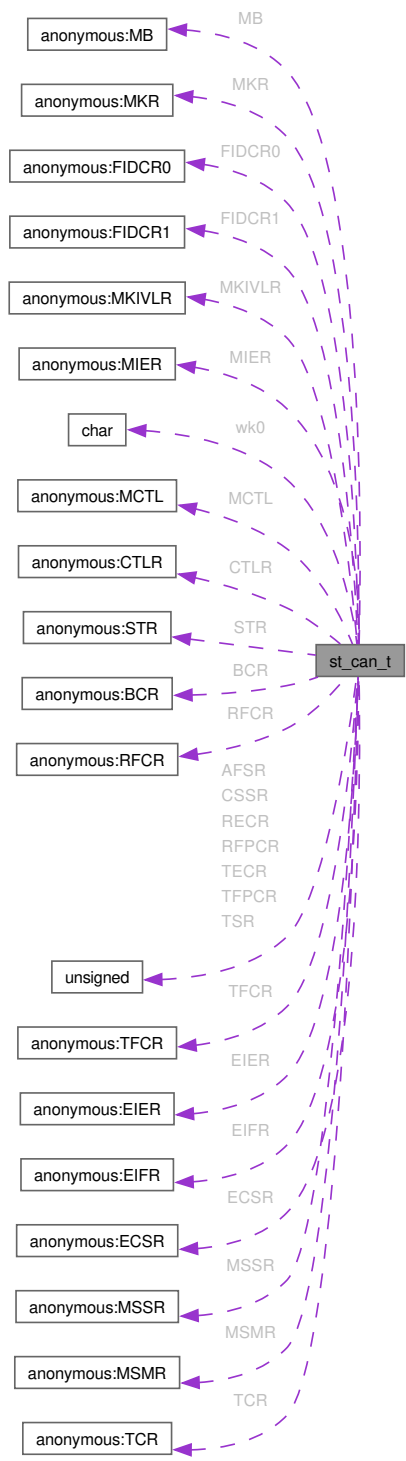

unsigned short st_can_t::AFSR

union { ... } st_can_t::BCR

unsigned char st_can_t::CSSR

union { ... } st_can_t::CTLR

union { ... } st_can_t::ECSR

union { ... } st_can_t::EIER

union { ... } st_can_t::EIFR

union { ... } st_can_t::FIDCR0

union { ... } st_can_t::FIDCR1

struct { ... } st_can_t::MB[32]

union { ... } st_can_t::MCTL[32]

union { ... } st_can_t::MIER

union { ... } st_can_t::MKIVLR

union { ... } st_can_t::MKR[8]

union { ... } st_can_t::MSMR

union { ... } st_can_t::MSSR

unsigned char st_can_t::RECR

union { ... } st_can_t::RFCR

unsigned char st_can_t::RFPCR

union { ... } st_can_t::STR

union { ... } st_can_t::TCR

unsigned char st_can_t::TECR


union { ... } st_can_t::TFCR

unsigned char st_can_t::TFPCR

unsigned short st_can_t::TSR

char st_can_t::wk0[1008]

```
#include <iodef.h>
```

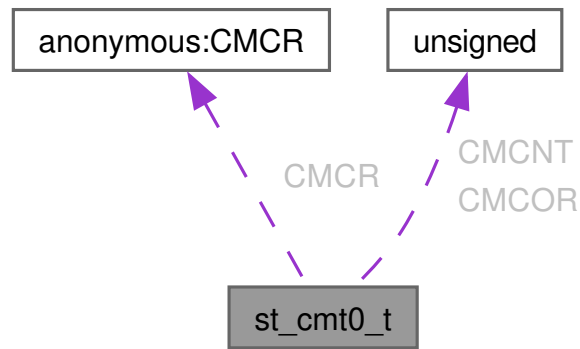


unsigned short st_cmt0_t::CMCNT

unsigned short st_cmt0_t::CMCOR

union { ... } st_cmt0_t::CMCR

#include <iodefine.h>

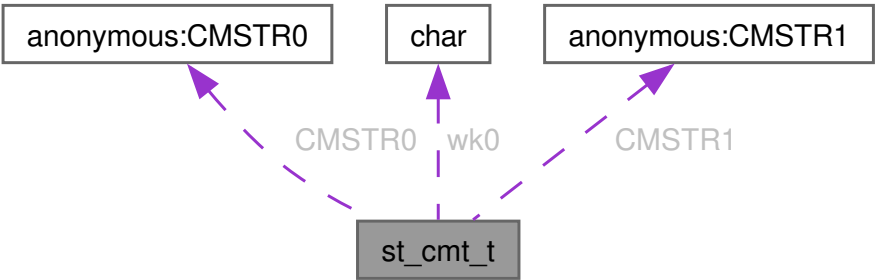


```
union { ... } st_cmt_t::CMSTR0
```

```
union { ... } st_cmt_t::CMSTR1
```

```
char st_cmt_t::wk0[14]
```

```
#include <iodef.h>
```

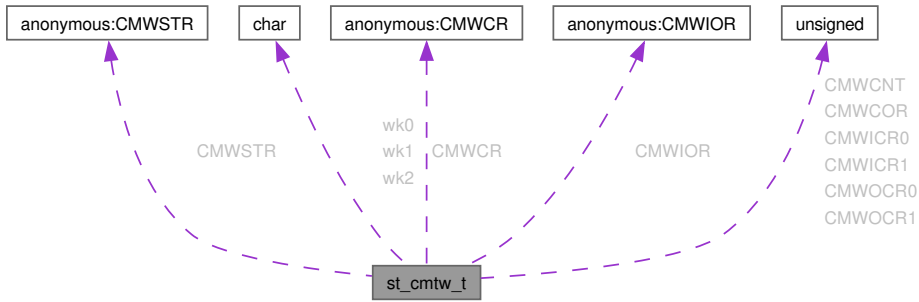

unsigned long st_cmtw_t::CMWCNT

unsigned long st_cmtw_t::CMWCOR

union { ... } st_cmtw_t::CMWCR

unsigned long st_cmtw_t::CMWICR0

unsigned long st_cmtw_t::CMWICR1

union { ... } st_cmtw_t::CMWIOR

unsigned long st_cmtw_t::CMWOCR0

unsigned long st_cmtw_t::CMWOCR1


union { ... } st_cmtw_t::CMWSTR

char st_cmtw_t::wk0[2]

char st_cmtw_t::wk1[2]

char st_cmtw_t::wk2[6]

```
#include <iodef.h>
```

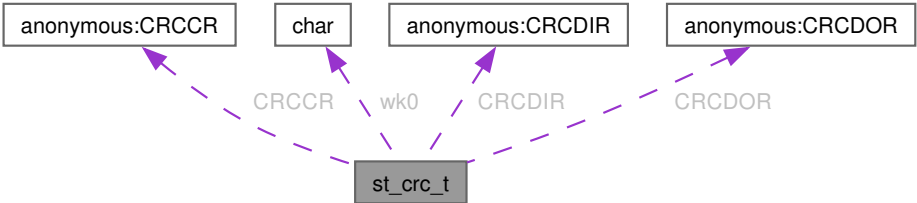


```
union { ... } st_crc_t::CRCCR
```

```
union { ... } st_crc_t::CRCDIR
```

```
union { ... } st_crc_t::CRCDOR
```

```
char st_crc_t::wk0[3]
```

```
#include <iodef.h>
```

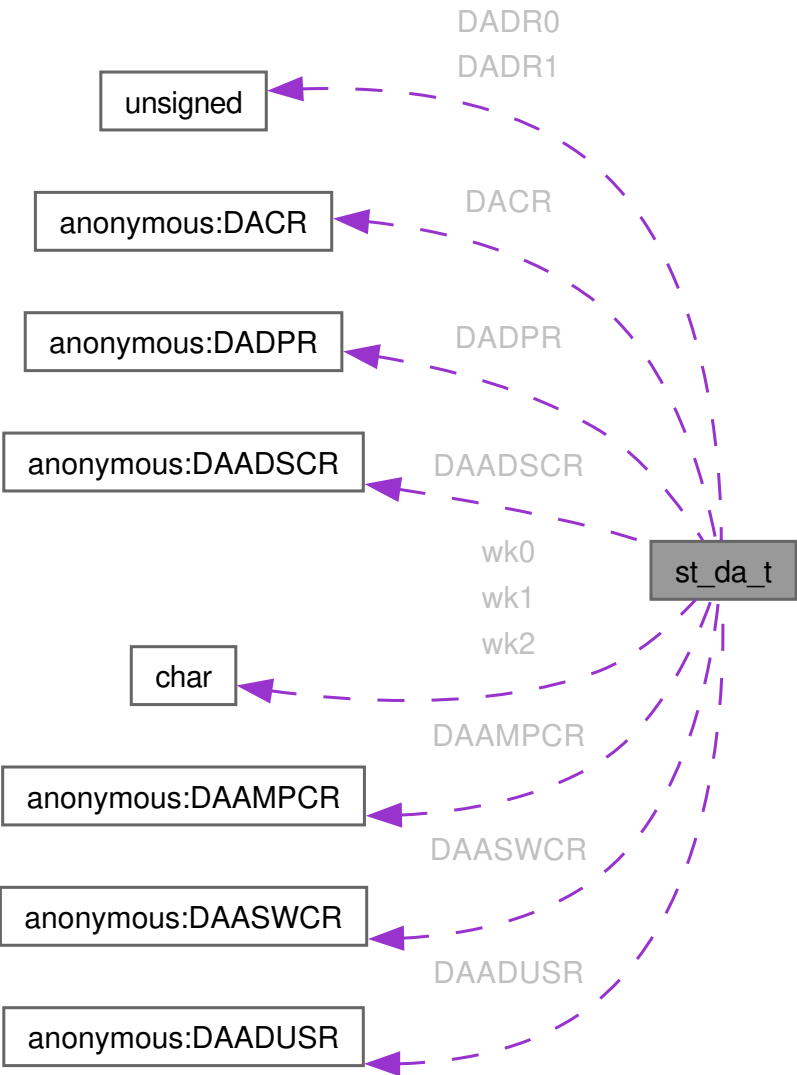

union { ... } st_da_t::DAADSCR

union { ... } st_da_t::DAADUSR

union { ... } st_da_t::DAAMPCR

union { ... } st_da_t::DAASWCR

union { ... } st_da_t::DACR

union { ... } st_da_t::DADPR

unsigned short st_da_t::DADR0


unsigned short st_da_t::DADR1

char st_da_t::wk0[1]

char st_da_t::wk1[19]

char st_da_t::wk2[17763]

#include <iodefine.h>

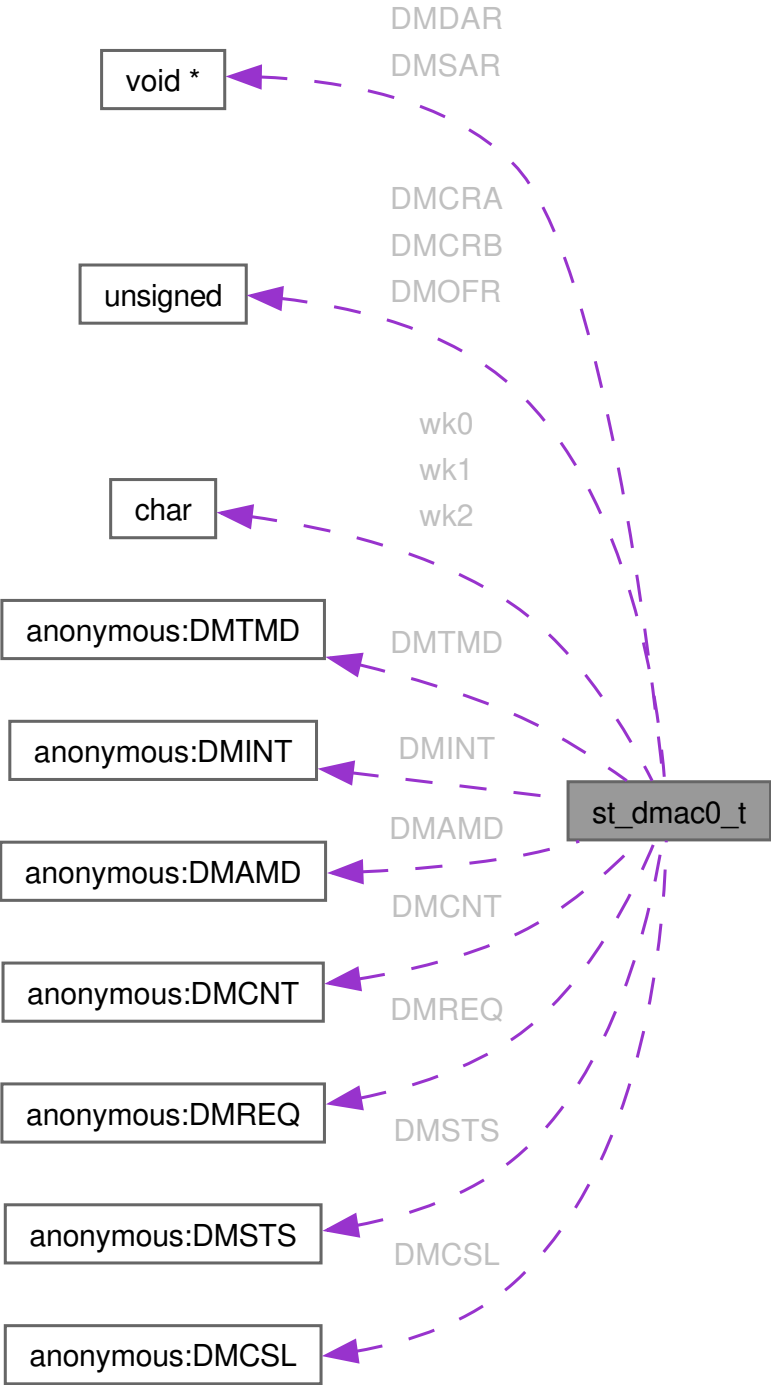

*
*

union { ... } st_dmac0_t::DMAMD

union { ... } st_dmac0_t::DMCNT

unsigned long st_dmac0_t::DMCRA

unsigned short st_dmac0_t::DMCRB

union { ... } st_dmac0_t::DMCSL

void* st_dmac0_t::DMDAR

union { ... } st_dmac0_t::DMINT

unsigned long st_dmac0_t::DMOFR

union { ... } st_dmac0_t::DMREQ

void* st_dmac0_t::DMSAR

union { ... } st_dmac0_t::DMSTS


union { ... } st_dmac0_t::DMTMD

char st_dmac0_t::wk0[2]

```
char st_dmac0_t::wk1[1]
```

```
char st_dmac0_t::wk2[2]
```

```
#include <iodefine.h>
```

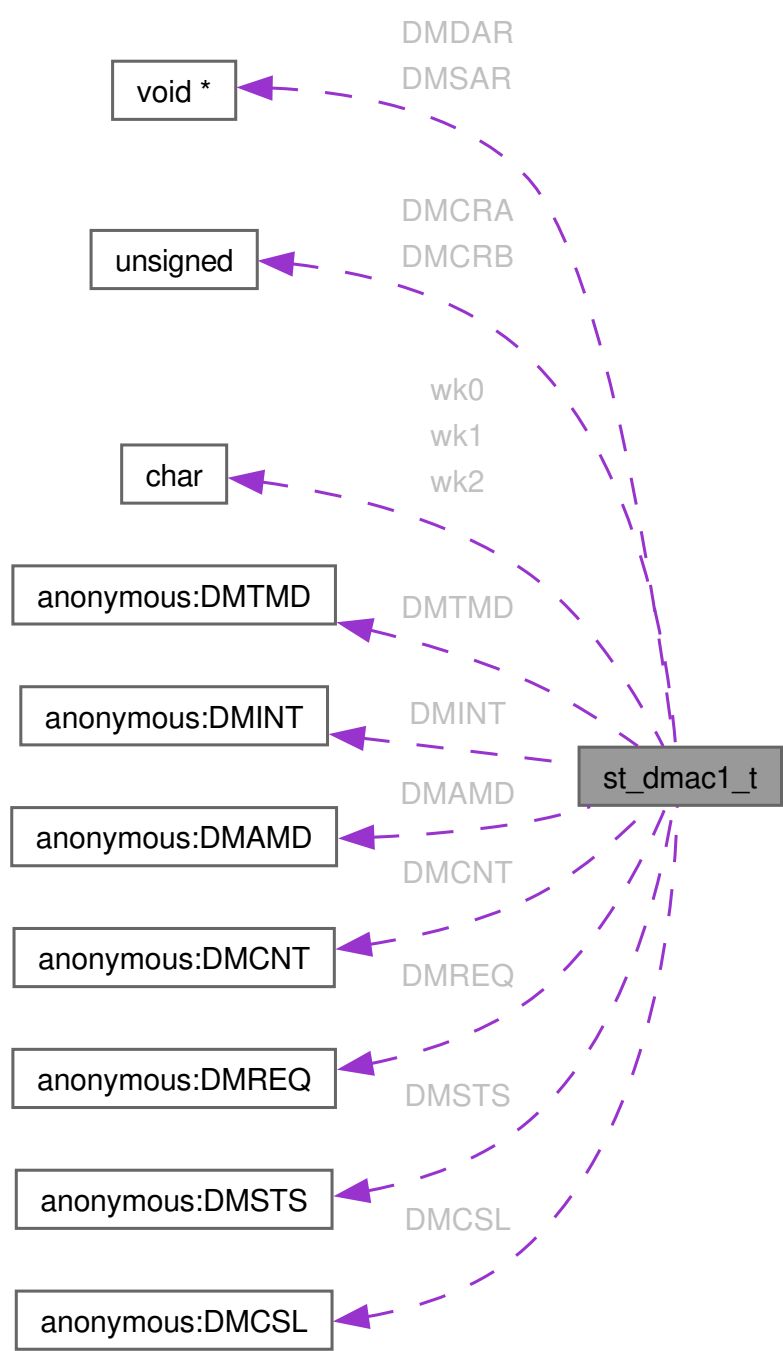

*
*

union { ... } st_dmac1_t::DMAMD

union { ... } st_dmac1_t::DMCNT

unsigned long st_dmac1_t::DMCRA

unsigned short st_dmac1_t::DMCRB

union { ... } st_dmac1_t::DMCSL

void* st_dmac1_t::DMDAR

union { ... } st_dmac1_t::DMINT

union { ... } st_dmac1_t::DMREQ

void* st_dmac1_t::DMSAR

union { ... } st_dmac1_t::DMSTS


union { ... } st_dmac1_t::DMTMD

char st_dmac1_t::wk0[2]

char st_dmac1_t::wk1[1]

```
char st_dmac1_t::wk2[6]
```

```
#include <iodefine.h>
```

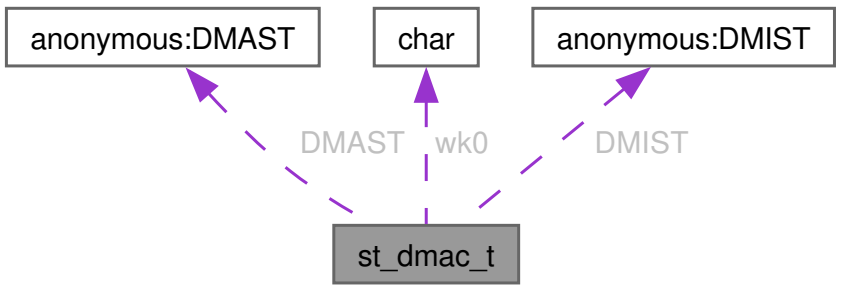


```
union { ... } st_dmac_t::DMAST
```

```
union { ... } st_dmac_t::DMIST
```

```
char st_dmac_t::wk0[3]
```

```
#include <iodef.h>
```

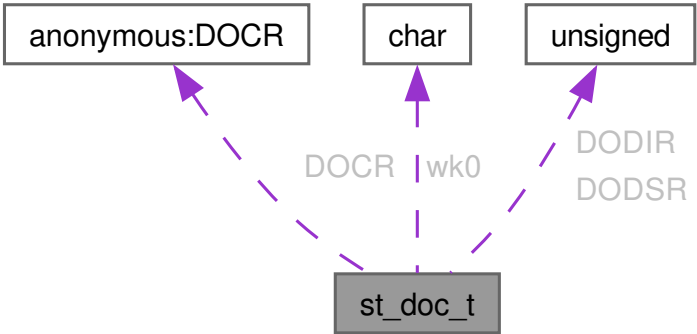


```
union { ... } st_doc_t::DOCR
```

```
unsigned short st_doc_t::DODIR
```

```
unsigned short st_doc_t::DODSR
```

```
char st_doc_t::wk0[1]
```

```
#include <iodefne.h>
```

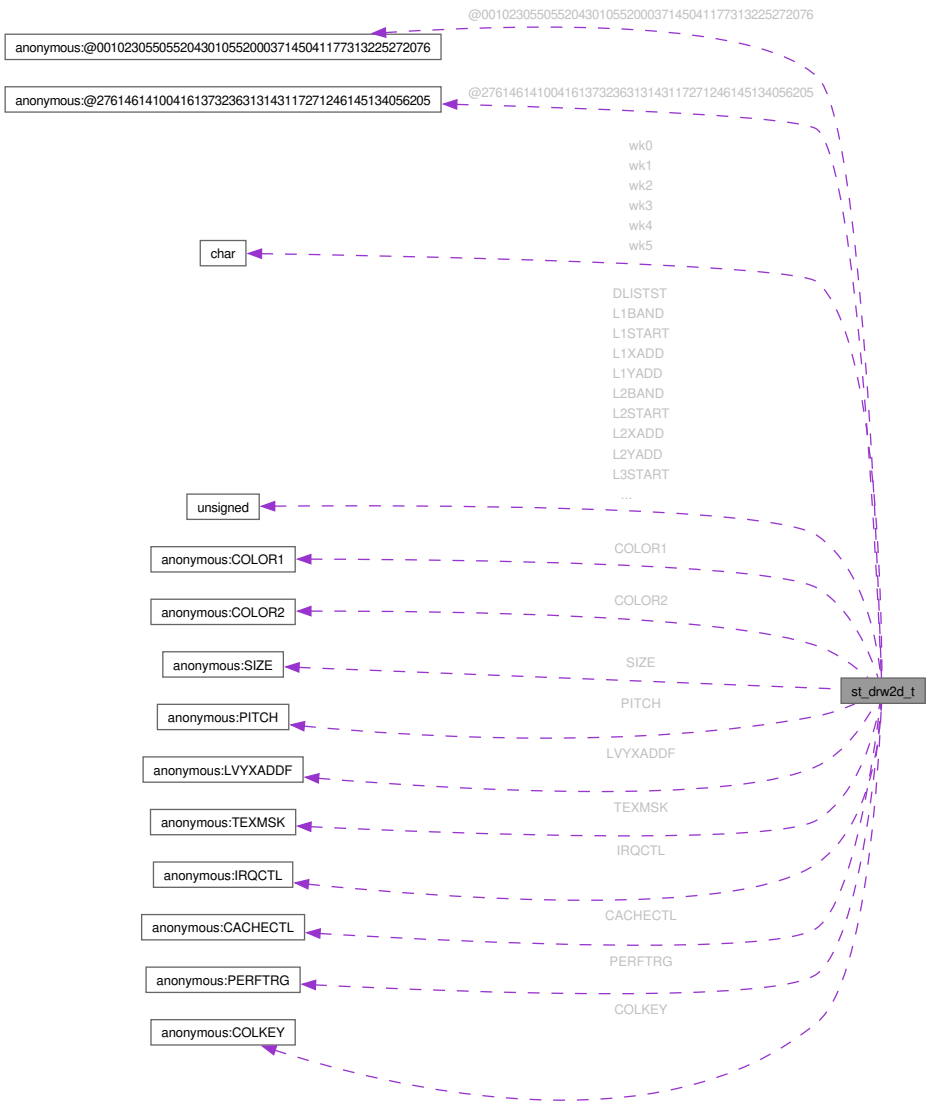

union { ... } [st_drw2d_t](#)

union { ... } [st_drw2d_t](#)

union { ... } st_drw2d_t::CACHECTL

union { ... } st_drw2d_t::COLKEY

union { ... } st_drw2d_t::COLOR1

union { ... } st_drw2d_t::COLOR2

unsigned long st_drw2d_t::DLISTST

union { ... } st_drw2d_t::IRQCTL

unsigned long st_drw2d_t::L1BAND

unsigned long st_drw2d_t::L1START

unsigned long st_drw2d_t::L1XADD

unsigned long st_drw2d_t::L1YADD

unsigned long st_drw2d_t::L2BAND

unsigned long st_drw2d_t::L2START

unsigned long st_drw2d_t::L2XADD

unsigned long st_drw2d_t::L2YADD

unsigned long st_drw2d_t::L3START

unsigned long st_drw2d_t::L3XADD

unsigned long st_drw2d_t::L3YADD

unsigned long st_drw2d_t::L4START

unsigned long st_drw2d_t::L4XADD

unsigned long st_drw2d_t::L4YADD

unsigned long st_drw2d_t::L5START

unsigned long st_drw2d_t::L5XADD

unsigned long st_drw2d_t::L5YADD

unsigned long st_drw2d_t::L6START

unsigned long st_drw2d_t::L6XADD

unsigned long st_drw2d_t::L6YADD

unsigned long st_drw2d_t::LUST

unsigned long st_drw2d_t::LUXADD

unsigned long st_drw2d_t::LUYADD

unsigned long st_drw2d_t::LVSTF

unsigned long st_drw2d_t::LVSTI

unsigned long st_drw2d_t::LVXADDI

unsigned long st_drw2d_t::LVYADDI

union { ... } st_drw2d_t::LVYXADDF

unsigned long st_drw2d_t::ORIGIN

unsigned long st_drw2d_t::PATTERN

unsigned long st_drw2d_t::PERFCNT1

unsigned long st_drw2d_t::PERFCNT2

union { ... } st_drw2d_t::PERFTRG

union { ... } st_drw2d_t::PITCH

union { ... } st_drw2d_t::SIZE

unsigned long st_drw2d_t::TEXCLADDR

unsigned long st_drw2d_t::TEXCLDATA

unsigned long st_drw2d_t::TEXCLOFST

union { ... } st_drw2d_t::TEXMSK

unsigned long st_drw2d_t::TEXORG

unsigned long st_drw2d_t::TEXPITCH

char st_drw2d_t::wk0[8]

char st_drw2d_t::wk1[4]


char st_drw2d_t::wk2[8]

```
char st_drw2d_t::wk3[12]
```

```
char st_drw2d_t::wk4[4]
```

```
char st_drw2d_t::wk5[4]
```

```
#include <iodef.h>
```

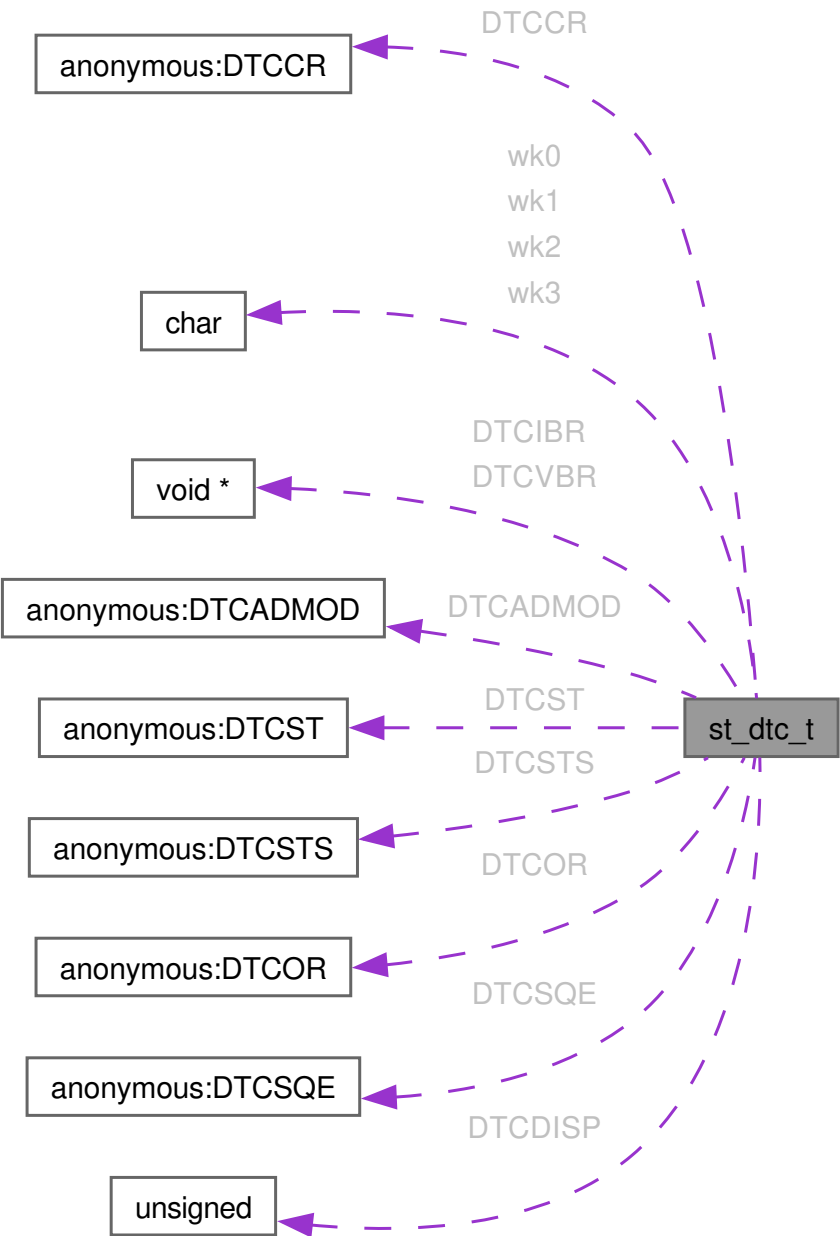

*

*

union { ... } st_dtc_t::DTCADMOD

union { ... } st_dtc_t::DTCCR

unsigned long st_dtc_t::DTCDISP

void* st_dtc_t::DTCIBR

union { ... } st_dtc_t::DTCOR

union { ... } st_dtc_t::DTCSQE

union { ... } st_dtc_t::DTCST

union { ... } st_dtc_t::DTCSTS

void* st_dtc_t::DTCVBR


char st_dtc_t::wk0[3]

char st_dtc_t::wk1[3]

char st_dtc_t::wk2[1]

char st_dtc_t::wk3[1]

```
#include <iodef.h>
```

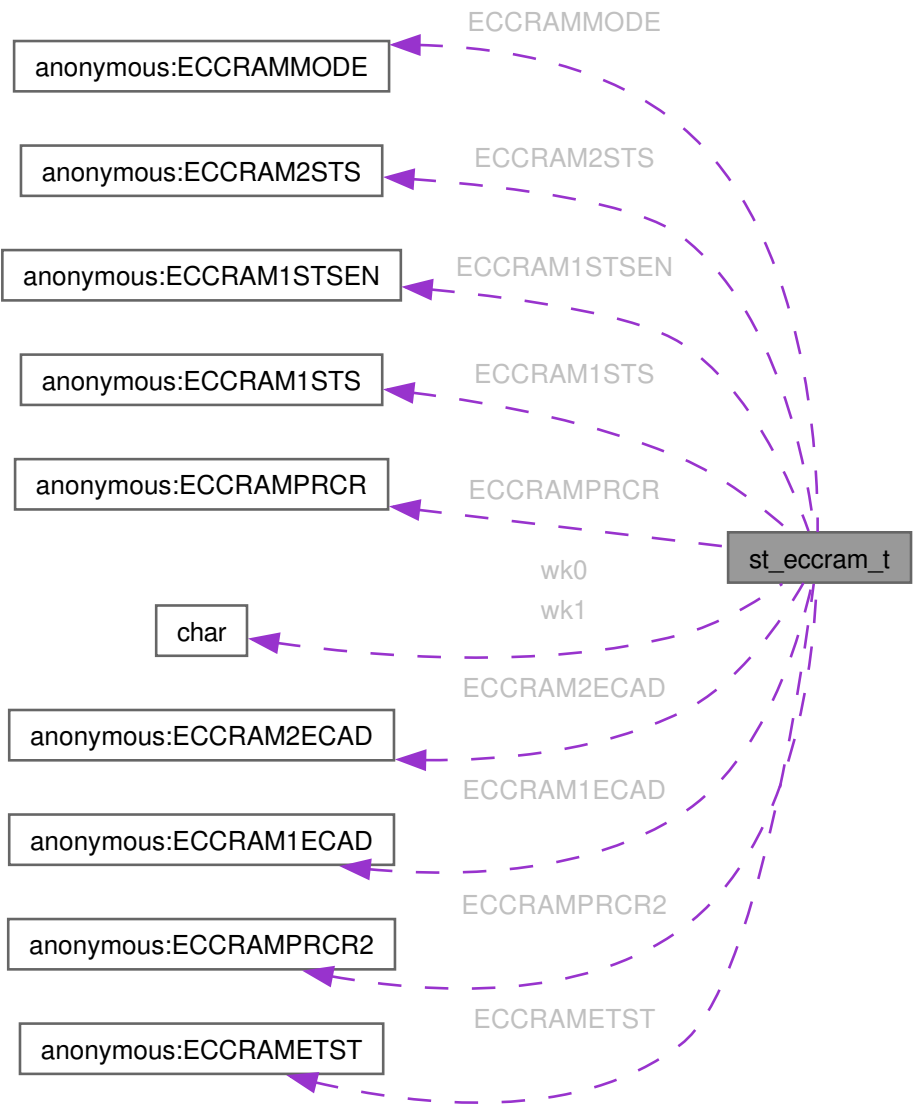

union { ... } st_eccram_t::ECCRAM1ECAD

union { ... } st_eccram_t::ECCRAM1STS

union { ... } st_eccram_t::ECCRAM1STSEN

union { ... } st_eccram_t::ECCRAM2ECAD

union { ... } st_eccram_t::ECCRAM2STS

union { ... } st_eccram_t::ECCRAMETST

union { ... } st_eccram_t::ECCRAMMODE


union { ... } st_eccram_t::ECCRAMPRCR

union { ... } st_eccram_t::ECCRAMPRCR2

char st_eccram_t::wk0[3]

char st_eccram_t::wk1[3]

```
#include <iodefine.h>
```

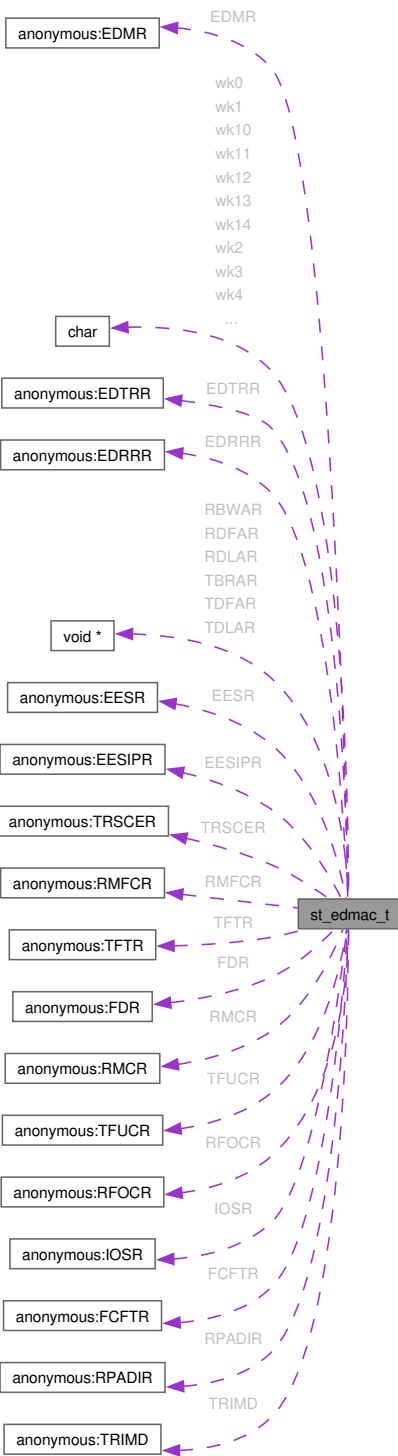

*

*

*
*

*
*

union { ... } st_edmac_t::EDMR
union { ... } st_edmac_t::EDRRR
union { ... } st_edmac_t::EDTRR
union { ... } st_edmac_t::EESIPR
union { ... } st_edmac_t::EESR
union { ... } st_edmac_t::FCFTR
union { ... } st_edmac_t::FDR
union { ... } st_edmac_t::IOSR
void* st_edmac_t::RBWAR

void* st_edmac_t::RDFAR

void* st_edmac_t::RDLAR

union { ... } st_edmac_t::RFOCR
union { ... } st_edmac_t::RMCR
union { ... } st_edmac_t::RMFCR

union { ... } st_edmac_t::RPADIR

void* st_edmac_t::TBRAR

void* st_edmac_t::TDFAR

void* st_edmac_t::TDLAR

union { ... } st_edmac_t::TFTR

union { ... } st_edmac_t::TFUCR

union { ... } st_edmac_t::TRIMD

union { ... } st_edmac_t::TRSCER

char st_edmac_t::wk0[4]

char st_edmac_t::wk1[4]

char st_edmac_t::wk10[4]

char st_edmac_t::wk11[8]

char st_edmac_t::wk12[4]

char st_edmac_t::wk13[72]

char st_edmac_t::wk14[4]

char st_edmac_t::wk2[4]

char st_edmac_t::wk3[4]

char st_edmac_t::wk4[4]

char st_edmac_t::wk5[4]


char st_edmac_t::wk6[4]

char st_edmac_t::wk7[4]

char st_edmac_t::wk8[4]

char st_edmac_t::wk9[4]

```
#include <iodefine.h>
```

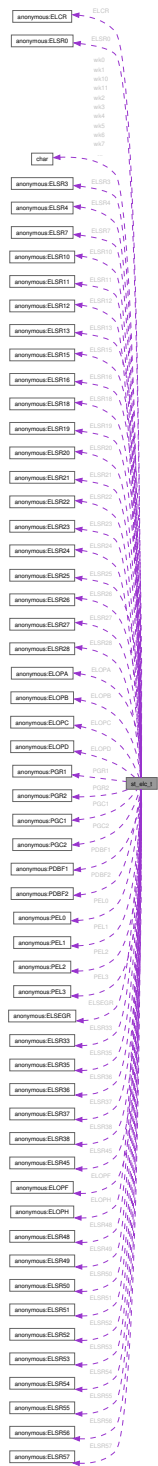

union { ... } st_elc_t::ELCR
union { ... } st_elc_t::ELOPA
union { ... } st_elc_t::ELOPB
union { ... } st_elc_t::ELOPC
union { ... } st_elc_t::ELOPD
union { ... } st_elc_t::ELOPF
union { ... } st_elc_t::ELOPH
union { ... } st_elc_t::ELSEGR

union { ... } st_elc_t::ELSR0

union { ... } st_elc_t::ELSR10

union { ... } st_elc_t::ELSR11

union { ... } st_elc_t::ELSR12

union { ... } st_elc_t::ELSR13

union { ... } st_elc_t::ELSR15

union { ... } st_elc_t::ELSR16

union { ... } st_elc_t::ELSR18

union { ... } st_elc_t::ELSR19

union { ... } st_elc_t::ELSR20

union { ... } st_elc_t::ELSR21

union { ... } st_elc_t::ELSR22

union { ... } st_elc_t::ELSR23

union { ... } st_elc_t::ELSR24

union { ... } st_elc_t::ELSR25

union { ... } st_elc_t::ELSR26

union { ... } st_elc_t::ELSR27

union { ... } st_elc_t::ELSR28

union { ... } st_elc_t::ELSR3

union { ... } st_elc_t::ELSR33

union { ... } st_elc_t::ELSR35

union { ... } st_elc_t::ELSR36

union { ... } st_elc_t::ELSR37

union { ... } st_elc_t::ELSR38

union { ... } st_elc_t::ELSR4

union { ... } st_elc_t::ELSR45

union { ... } st_elc_t::ELSR48

union { ... } st_elc_t::ELSR49

union { ... } st_elc_t::ELSR50

union { ... } st_elc_t::ELSR51

union { ... } st_elc_t::ELSR52

union { ... } st_elc_t::ELSR53

union { ... } st_elc_t::ELSR54

union { ... } st_elc_t::ELSR55

union { ... } st_elc_t::ELSR56

union { ... } st_elc_t::ELSR57

union { ... } st_elc_t::ELSR7

union { ... } st_elc_t::PDBF1

union { ... } st_elc_t::PDBF2

union { ... } st_elc_t::PEL0

union { ... } st_elc_t::PEL1

union { ... } st_elc_t::PEL2

union { ... } st_elc_t::PEL3

union { ... } st_elc_t::PGC1

union { ... } st_elc_t::PGC2

union { ... } st_elc_t::PGR1

union { ... } st_elc_t::PGR2

char st_elc_t::wk0[2]

char st_elc_t::wk1[2]

char st_elc_t::wk10[1]

char st_elc_t::wk11[4]

char st_elc_t::wk2[2]

char st_elc_t::wk3[1]

char st_elc_t::wk4[1]

char st_elc_t::wk5[1]


char st_elc_t::wk6[3]

char st_elc_t::wk7[1]

char st_elc_t::wk8[6]

char st_elc_t::wk9[1]

```
#include <iodefine.h>
```

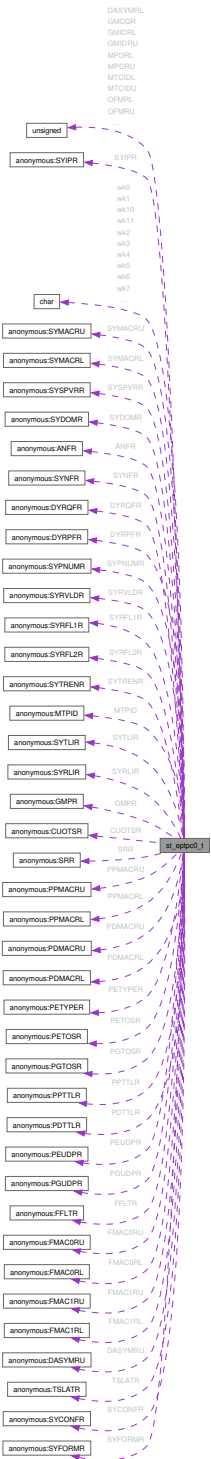

union { ... } st_eptpc0_t::ANFR

union { ... } st_eptpc0_t::CUOTSR

unsigned long st_eptpc0_t::DASYMRL

union { ... } st_eptpc0_t::DASYMRU

union { ... } st_eptpc0_t::DYRPFR

union { ... } st_eptpc0_t::DYRQFR

union { ... } st_eptpc0_t::FFLTR

union { ... } st_eptpc0_t::FMAC0RL

union { ... } st_eptpc0_t::FMAC0RU

union { ... } st_eptpc0_t::FMAC1RL

union { ... } st_eptpc0_t::FMAC1RU

unsigned long st_eptpc0_t::GMCQR

unsigned long st_eptpc0_t::GMIDRL

unsigned long st_eptpc0_t::GMIDRU

union { ... } st_eptpc0_t::GMPR

unsigned long st_eptpc0_t::MPDRL

unsigned long st_eptpc0_t::MPDRU

unsigned long st_eptpc0_t::MTCIDL

unsigned long st_eptpc0_t::MTCIDU

union { ... } st_eptpc0_t::MTPID

unsigned long st_eptpc0_t::OFMRL

unsigned long st_eptpc0_t::OFMRU

unsigned long st_eptpc0_t::PDIPR

union { ... } st_eptpc0_t::PDMACRL

union { ... } st_eptpc0_t::PDMACRU

union { ... } st_eptpc0_t::PDTTLR

union { ... } st_eptpc0_t::PETOSR

union { ... } st_eptpc0_t::PETYPER

union { ... } st_eptpc0_t::PEUDPR

union { ... } st_eptpc0_t::PGTOSR

union { ... } st_eptpc0_t::PGUDPR

unsigned long st_eptpc0_t::PPIPR

union { ... } st_eptpc0_t::PPMACRL

union { ... } st_eptpc0_t::PPMACRU

union { ... } st_eptpc0_t::PPTTLR

unsigned long st_eptpc0_t::RSTOUTR

union { ... } st_eptpc0_t::SRR

unsigned long st_eptpc0_t::SYCIDRL

unsigned long st_eptpc0_t::SYCIDRU

union { ... } st_eptpc0_t::SYCONFR

union { ... } st_eptpc0_t::SYDOMR

union { ... } st_eptpc0_t::SYFORMR

unsigned long st_eptpc0_t::SYIPADDR

union { ... } st_eptpc0_t::SYIPR

unsigned long st_eptpc0_t::SYLLCCTL

union { ... } st_eptpc0_t::SYMACRL

union { ... } st_eptpc0_t::SYMACRU

union { ... } st_eptpc0_t::SYNFR

union { ... } st_eptpc0_t::SYPNUMR

union { ... } st_eptpc0_t::SYRFL1R

union { ... } st_eptpc0_t::SYRFL2R

union { ... } st_eptpc0_t::SYRLIR

union { ... } st_eptpc0_t::SYRVLDR

union { ... } st_eptpc0_t::SYSPVRR

unsigned long st_eptpc0_t::SYSR

union { ... } st_eptpc0_t::SYTLIR

union { ... } st_eptpc0_t::SYTRENR

union { ... } st_eptpc0_t::TSLATR

char st_eptpc0_t::wk0[8]

char st_eptpc0_t::wk1[32]

char st_eptpc0_t::wk10[28]

char st_eptpc0_t::wk11[80]

char st_eptpc0_t::wk2[8]

char st_eptpc0_t::wk3[20]

char st_eptpc0_t::wk4[12]

char st_eptpc0_t::wk5[4]


char st_eptpc0_t::wk6[20]

char st_eptpc0_t::wk7[8]

char st_eptpc0_t::wk8[8]

char st_eptpc0_t::wk9[12]

```
#include <iodefne.h>
```

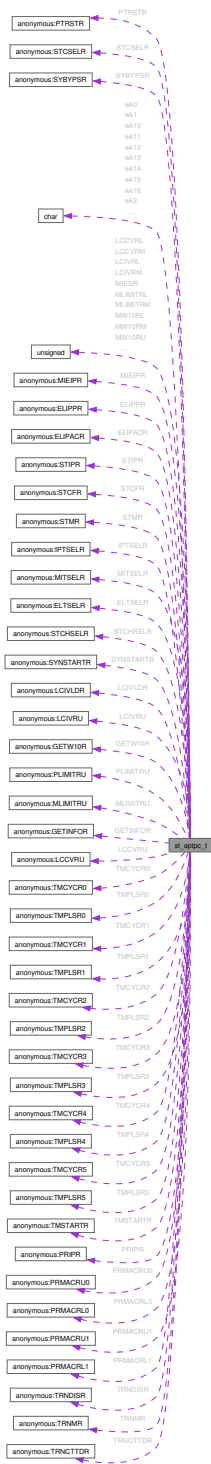

union { ... } st_eptpc_t::ELIPACR

union { ... } st_eptpc_t::ELIPPR

union { ... } st_eptpc_t::ELTSELR

union { ... } st_eptpc_t::GETINFOR

union { ... } st_eptpc_t::GETW10R

union { ... } st_eptpc_t::IPTSELR

unsigned long st_eptpc_t::LCCVRL

unsigned long st_eptpc_t::LCCVRM

union { ... } st_eptpc_t::LCCVRU

union { ... } st_eptpc_t::LCIVLDR

unsigned long st_eptpc_t::LCIVRL

unsigned long st_eptpc_t::LCIVRM

union { ... } st_eptpc_t::LCIVRU

union { ... } st_eptpc_t::MIEIPR

unsigned long st_eptpc_t::MIESR

union { ... } st_eptpc_t::MITSELR

unsigned long st_eptpc_t::MLIMITRL

unsigned long st_eptpc_t::MLIMITRM

union { ... } st_eptpc_t::MLIMITRU

unsigned long st_eptpc_t::MW10RL

unsigned long st_eptpc_t::MW10RM

unsigned long st_eptpc_t::MW10RU

unsigned long st_eptpc_t::PLIMITRL

unsigned long st_eptpc_t::PLIMITRM

union { ... } st_eptpc_t::PLIMITRU

union { ... } st_eptpc_t::PRIPR

union { ... } st_eptpc_t::PRMACRL0

union { ... } st_eptpc_t::PRMACRL1

union { ... } st_eptpc_t::PRMACRU0

union { ... } st_eptpc_t::PRMACRU1

unsigned long st_eptpc_t::PRSR

union { ... } st_eptpc_t::PTRSTR

unsigned long st_eptpc_t::PW10VRL

unsigned long st_eptpc_t::PW10VRM

unsigned long st_eptpc_t::PW10VRU

union { ... } st_eptpc_t::STCFR

union { ... } st_eptpc_t::STCHSELR

union { ... } st_eptpc_t::STCSELR

union { ... } st_eptpc_t::STIPR

union { ... } st_eptpc_t::STMIR

unsigned long st_eptpc_t::STSR

union { ... } st_eptpc_t::SYBYPSR

union { ... } st_eptpc_t::SYNSTARTR

unsigned long st_eptpc_t::SYNTDARL

unsigned long st_eptpc_t::SYNTDARU

unsigned long st_eptpc_t::SYNTDBRL

unsigned long st_eptpc_t::SYNTDBRU

unsigned long st_eptpc_t::SYNTOR

union { ... } st_eptpc_t::TMCYCR0

union { ... } st_eptpc_t::TMCYCR1

union { ... } st_eptpc_t::TMCYCR2

union { ... } st_eptpc_t::TMCYCR3

union { ... } st_eptpc_t::TMCYCR4

union { ... } st_eptpc_t::TMCYCR5

union { ... } st_eptpc_t::TMPLSR0

union { ... } st_eptpc_t::TMPLSR1

union { ... } st_eptpc_t::TMPLSR2

union { ... } st_eptpc_t::TMPLSR3

union { ... } st_eptpc_t::TMPLSR4

union { ... } st_eptpc_t::TMPLSR5

union { ... } st_eptpc_t::TMSTARTR

unsigned long st_eptpc_t::TMSTTRL0

unsigned long st_eptpc_t::TMSTTRL1

unsigned long st_eptpc_t::TMSTTRL2

unsigned long st_eptpc_t::TMSTTRL3

unsigned long st_eptpc_t::TMSTTRL4

unsigned long st_eptpc_t::TMSTTRL5

unsigned long st_eptpc_t::TMSTTRU0

unsigned long st_eptpc_t::TMSTTRU1

unsigned long st_eptpc_t::TMSTTRU2

unsigned long st_eptpc_t::TMSTTRU3

unsigned long st_eptpc_t::TMSTTRU4

unsigned long st_eptpc_t::TMSTTRU5

union { ... } st_eptpc_t::TRNCTTDR

union { ... } st_eptpc_t::TRNDISR

union { ... } st_eptpc_t::TRNMR

char st_eptpc_t::wk0[15092]

char st_eptpc_t::wk1[8]

char st_eptpc_t::wk10[148]

char st_eptpc_t::wk11[180]

char st_eptpc_t::wk12[36]

char st_eptpc_t::wk13[28]

char st_eptpc_t::wk14[128]

char st_eptpc_t::wk15[8]

char st_eptpc_t::wk16[12]

char st_eptpc_t::wk2[40]

char st_eptpc_t::wk3[8]

char st_eptpc_t::wk4[4]

char st_eptpc_t::wk5[16]


char st_eptpc_t::wk6[8]

char st_eptpc_t::wk7[16]

char st_eptpc_t::wk8[104]

char st_eptpc_t::wk9[44]

```
#include <iodefine.h>
```

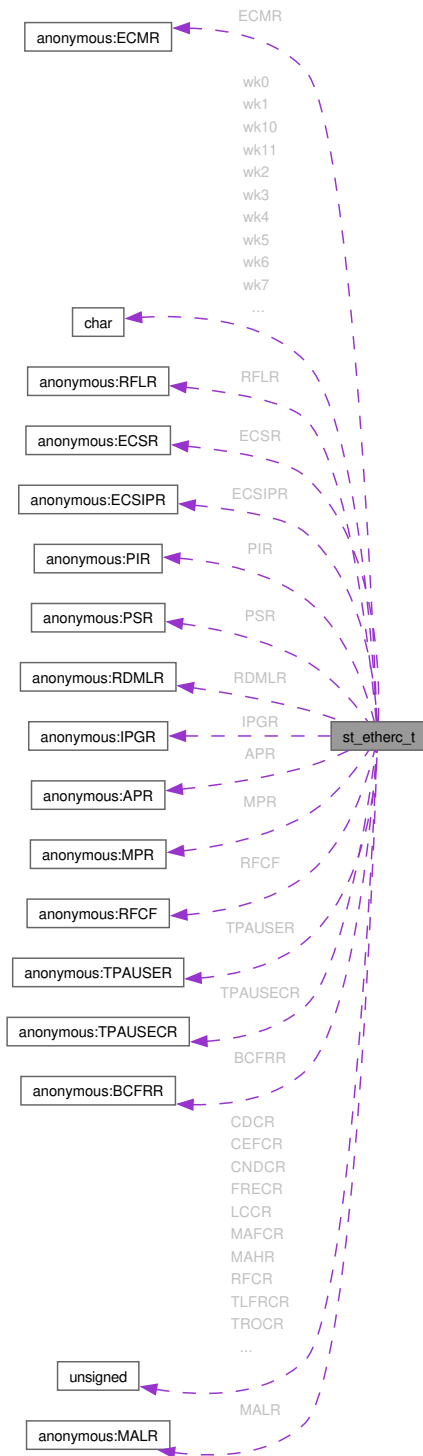

union { ... } st_etherc_t::APR

union { ... } st_etherc_t::BCFRR

unsigned long st_etherc_t::CDCR

unsigned long st_etherc_t::CEFCR

unsigned long st_etherc_t::CNDCCR

union { ... } st_etherc_t::ECMR

union { ... } st_etherc_t::ECSIPR

union { ... } st_etherc_t::ECSR

unsigned long st_etherc_t::FRECCR

union { ... } st_etherc_t::IPGR

unsigned long st_etherc_t::LCCR

unsigned long st_etherc_t::MAFCR

unsigned long st_etherc_t::MAHR

union { ... } st_etherc_t::MALR

union { ... } st_etherc_t::MPR

union { ... } st_etherc_t::PIR

union { ... } st_etherc_t::PSR

union { ... } st_etherc_t::RDMLR

union { ... } st_etherc_t::RFCF

unsigned long st_etherc_t::RFCR

union { ... } st_etherc_t::RFLR

unsigned long st_etherc_t::TLFRCR

union { ... } st_etherc_t::TPAUSECR

union { ... } st_etherc_t::TPAUSER

unsigned long st_etherc_t::TROCR

unsigned long st_etherc_t::TSFRCCR

char st_etherc_t::wk0[4]

char st_etherc_t::wk1[4]

char st_etherc_t::wk10[4]

char st_etherc_t::wk11[4]

char st_etherc_t::wk2[4]

char st_etherc_t::wk3[4]

char st_etherc_t::wk4[4]

char st_etherc_t::wk5[20]


char st_etherc_t::wk6[12]

char st_etherc_t::wk7[4]

char st_etherc_t::wk8[80]

char st_etherc_t::wk9[4]

```
#include <iodefne.h>
```

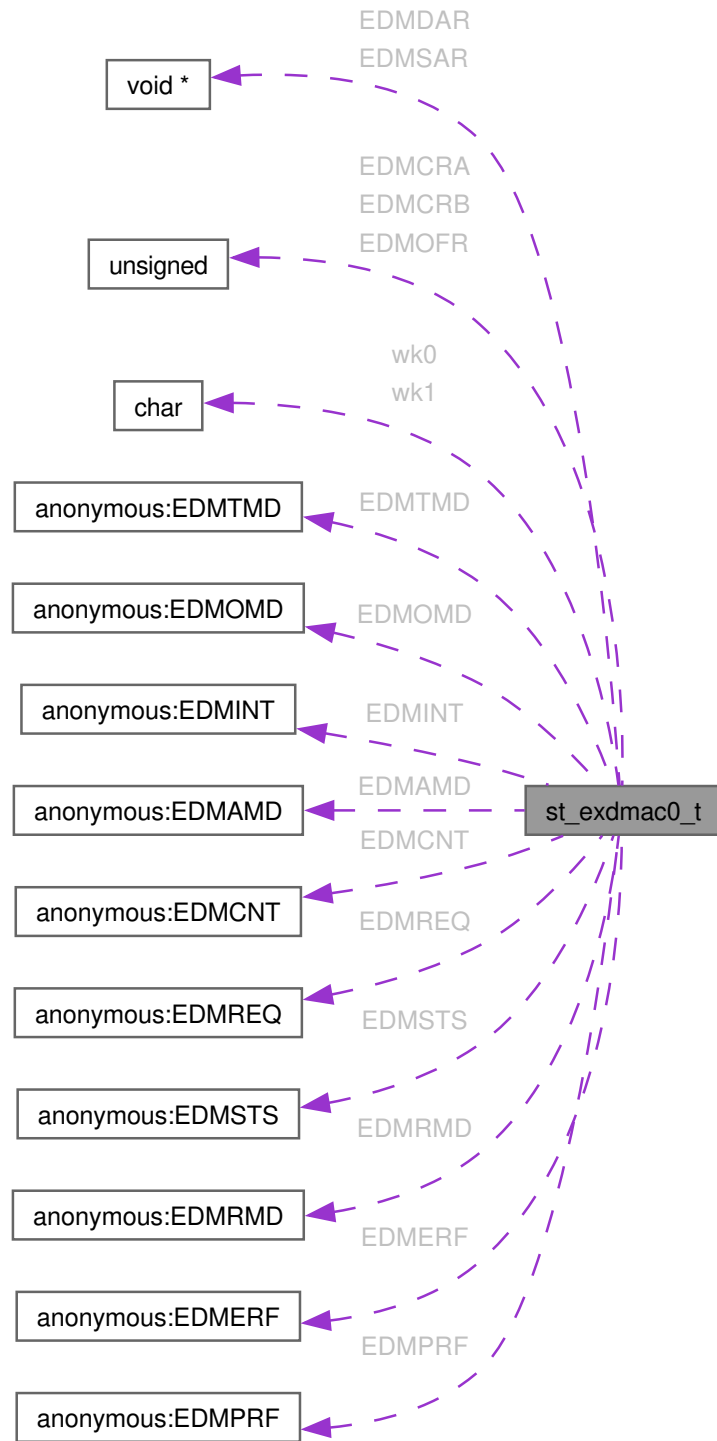

*
*

union { ... } st_exdmac0_t::EDMAMD

union { ... } st_exdmac0_t::EDMCNT

unsigned long st_exdmac0_t::EDMCRA

unsigned short st_exdmac0_t::EDMCRB

void* st_exdmac0_t::EDMDAR

union { ... } st_exdmac0_t::EDMERF

union { ... } st_exdmac0_t::EDMINT

unsigned long st_exdmac0_t::EDMOFR

union { ... } st_exdmac0_t::EDMOMD

union { ... } st_exdmac0_t::EDMPRF

union { ... } st_exdmac0_t::EDMREQ

union { ... } st_exdmac0_t::EDMRMD

void* st_exdmac0_t::EDMSAR


union { ... } st_exdmac0_t::EDMSTS

union { ... } st_exdmac0_t::EDMTMD

char st_exdmac0_t::wk0[2]

char st_exdmac0_t::wk1[1]

```
#include <iodefine.h>
```

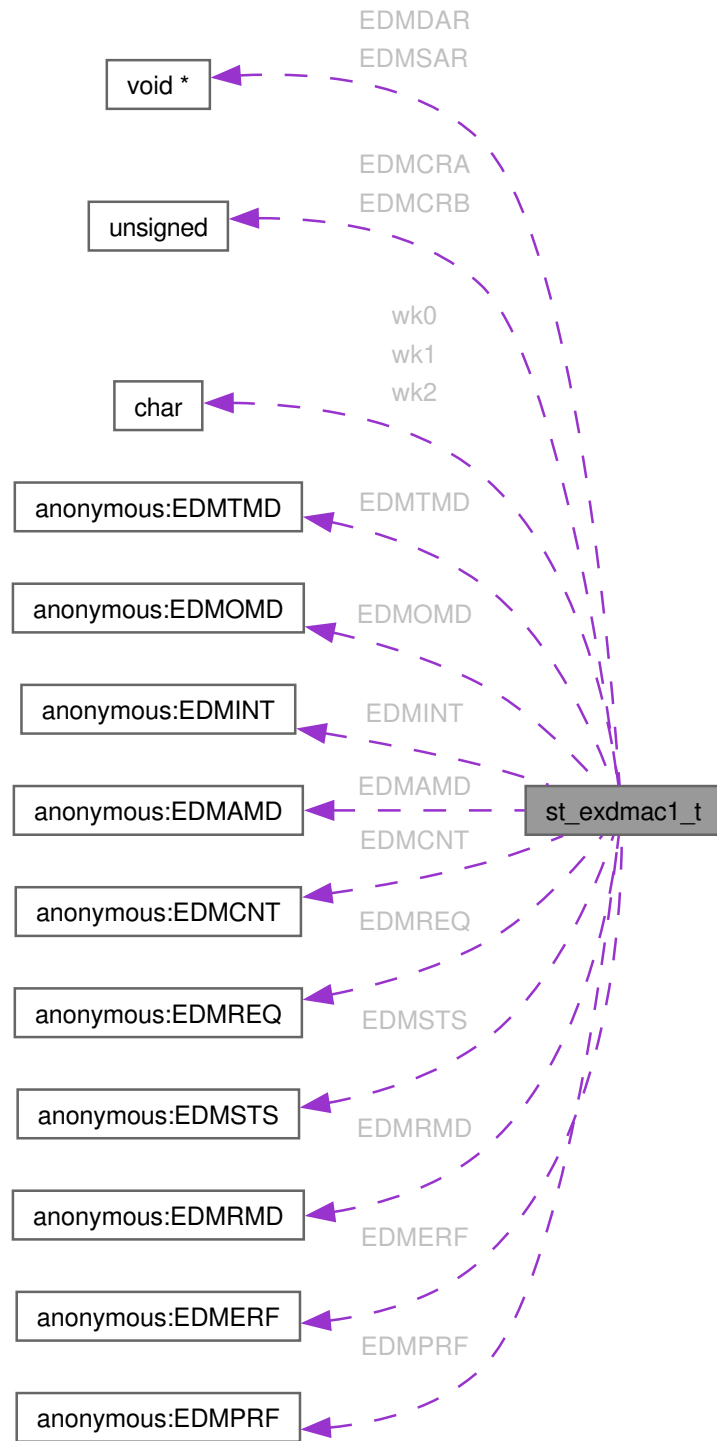

*
*

union { ... } st_exdmac1_t::EDMAMD

union { ... } st_exdmac1_t::EDMCNT

unsigned long st_exdmac1_t::EDMCRA

unsigned short st_exdmac1_t::EDMCRB

void* st_exdmac1_t::EDMDAR

```
union { ... } st_exdmac1_t::EDMERF
```

```
union { ... } st_exdmac1_t::EDMINT
```

```
union { ... } st_exdmac1_t::EDMOMD
```

```
union { ... } st_exdmac1_t::EDMPRF
```

```
union { ... } st_exdmac1_t::EDMREQ
```

```
union { ... } st_exdmac1_t::EDMRMD
```

```
void* st_exdmac1_t::EDMSAR
```

```
union { ... } st_exdmac1_t::EDMSTS
```


```
union { ... } st_exdmac1_t::EDMTMD
```

```
char st_exdmac1_t::wk0[2]
```

```
char st_exdmac1_t::wk1[4]
```

```
char st_exdmac1_t::wk2[1]
```

```
#include <iodef.h>
```

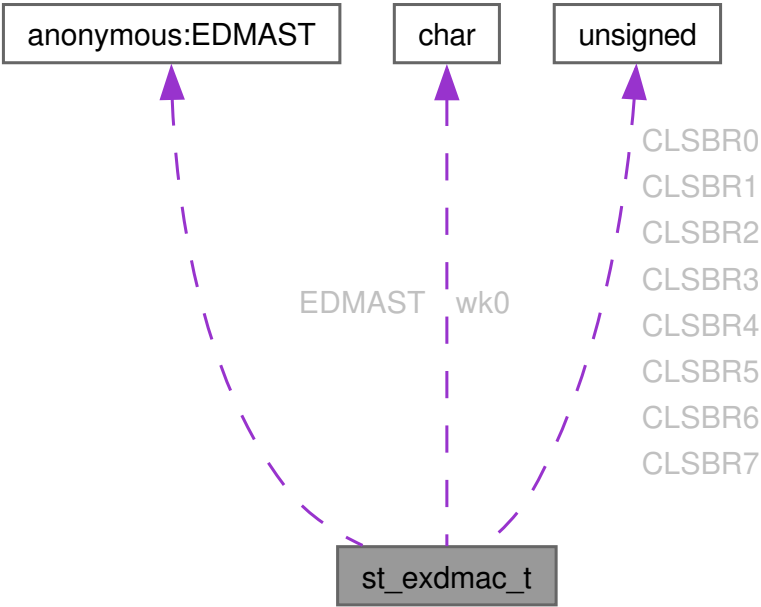

unsigned long st_exdmac_t::CLSBR0

unsigned long st_exdmac_t::CLSBR1

unsigned long st_exdmac_t::CLSBR2

unsigned long st_exdmac_t::CLSBR3

unsigned long st_exdmac_t::CLSBR4

unsigned long st_exdmac_t::CLSBR5


unsigned long st_exdmac_t::CLSBR6

unsigned long st_exdmac_t::CLSBR7

union { ... } st_exdmac_t::EDMAST

```
char st_exdmac_t::wk0[479]
```

```
#include <iodefne.h>
```

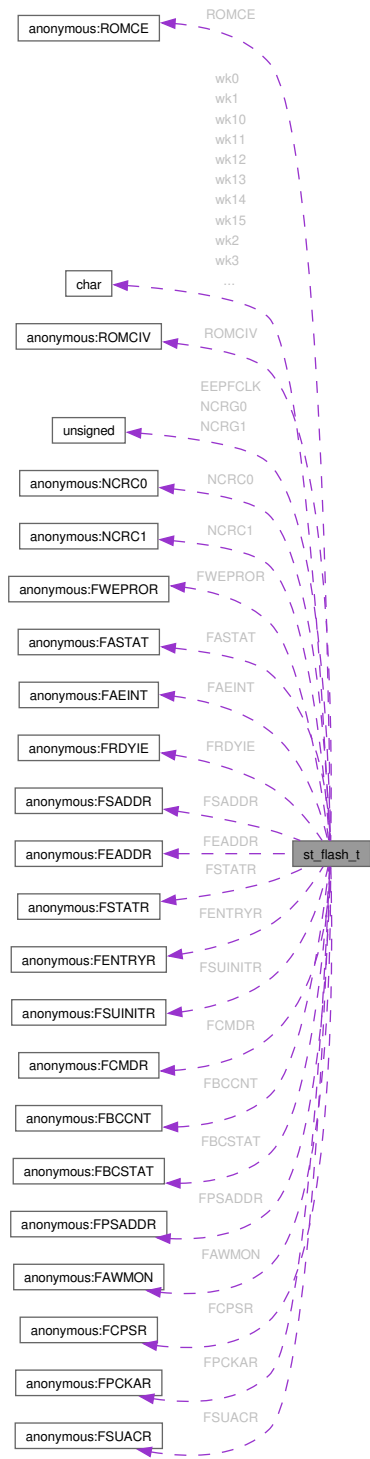

unsigned char st_flash_t::EEPCLK

union { ... } st_flash_t::FAEINT

union { ... } st_flash_t::FASTAT

union { ... } st_flash_t::FAWMON

union { ... } st_flash_t::FBCCNT

union { ... } st_flash_t::FBCSTAT

union { ... } st_flash_t::FCMDR

union { ... } st_flash_t::FCPSR

union { ... } st_flash_t::FEADDR

union { ... } st_flash_t::FENTRYR

union { ... } st_flash_t::FPCKAR

union { ... } st_flash_t::FPSADDR

union { ... } st_flash_t::FRDYIE

union { ... } st_flash_t::FSADDR

union { ... } st_flash_t::FSTATR

union { ... } st_flash_t::FSUACR

union { ... } st_flash_t::FSUINTR

union { ... } st_flash_t::FWEPROR

union { ... } st_flash_t::NCRC0

union { ... } st_flash_t::NCRC1

unsigned long st_flash_t::NCRG0

unsigned long st_flash_t::NCRG1

union { ... } st_flash_t::ROMCE

union { ... } st_flash_t::ROMCIV

char st_flash_t::wk0[2]

char st_flash_t::wk1[58]

char st_flash_t::wk10[18]

char st_flash_t::wk11[46]

char st_flash_t::wk12[3]

char st_flash_t::wk13[3]

char st_flash_t::wk14[2]

char st_flash_t::wk15[2]

char st_flash_t::wk2[45638]

char st_flash_t::wk3[7798185]

char st_flash_t::wk4[8143]

char st_flash_t::wk5[3]


char st_flash_t::wk6[3]

char st_flash_t::wk7[23]

char st_flash_t::wk8[72]

char st_flash_t::wk9[6]

```
#include <iodefine.h>
```



union { ... } st_glcdc_t::BGCOLOR

union { ... } st_glcdc_t::BGEN

union { ... } st_glcdc_t::BGHSIZE

union { ... } st_glcdc_t::BGMON

union { ... } st_glcdc_t::BGPRI

union { ... } st_glcdc_t::BGSYNC

union { ... } st_glcdc_t::BGVSIZE

union { ... } st_glcdc_t::BRIGHT1

union { ... } st_glcdc_t::BRIGHT2

union { ... } st_glcdc_t::CLKPHASE

union { ... } st_glcdc_t::CONTRAST

union { ... } st_glcdc_t::DTCTEN

union { ... } st_glcdc_t::GAMBAREA1

union { ... } st_glcdc_t::GAMBAREA2

union { ... } st_glcdc_t::GAMBAREA3

union { ... } st_glcdc_t::GAMBAREA4

union { ... } st_glcdc_t::GAMBAREA5

union { ... } st_glcdc_t::GAMBLUT1

union { ... } st_glcdc_t::GAMBLUT2

union { ... } st_glcdc_t::GAMBLUT3

union { ... } st_glcdc_t::GAMBLUT4

union { ... } st_glcdc_t::GAMBLUT5

union { ... } st_glcdc_t::GAMBLUT6

union { ... } st_glcdc_t::GAMBLUT7

union { ... } st_glcdc_t::GAMBLUT8

union { ... } st_glcdc_t::GAMBVEN

union { ... } st_glcdc_t::GAMGAREA1

union { ... } st_glcdc_t::GAMGAREA2

union { ... } st_glcdc_t::GAMGAREA3

union { ... } st_glcdc_t::GAMGAREA4

union { ... } st_glcde_t::GAMGAREA5

union { ... } st_glcde_t::GAMGLUT1

union { ... } st_glcde_t::GAMGLUT2

union { ... } st_glcde_t::GAMGLUT3

union { ... } st_glcde_t::GAMGLUT4

union { ... } st_glcde_t::GAMGLUT5

union { ... } st_glcde_t::GAMGLUT6

union { ... } st_glcde_t::GAMGLUT7

union { ... } st_glcde_t::GAMGLUT8

union { ... } st_glcde_t::GAMGVEN

union { ... } st_glcde_t::GAMRAREA1

union { ... } st_glcde_t::GAMRAREA2

union { ... } st_glcde_t::GAMRAREA3

union { ... } st_glcde_t::GAMRAREA4

union { ... } st_glcde_t::GAMRAREA5

union { ... } st_glcde_t::GAMRLUT1

union { ... } st_glcde_t::GAMRLUT2

union { ... } st_glcde_t::GAMRLUT3

union { ... } st_glcde_t::GAMRLUT4

union { ... } st_glcde_t::GAMRLUT5

union { ... } st_glcde_t::GAMRLUT6

union { ... } st_glcde_t::GAMRLUT7

union { ... } st_glcde_t::GAMRLUT8

union { ... } st_glcde_t::GAMRVEN

union { ... } st_glcde_t::GAMSW

union { ... } st_glcde_t::GR1AB1

union { ... } st_glcde_t::GR1AB2

union { ... } st_glcde_t::GR1AB3

union { ... } st_glcde_t::GR1AB4

union { ... } st_glcde_t::GR1AB5

union { ... } st_glcde_t::GR1AB6

union { ... } st_glcde_t::GR1AB7

union { ... } st_glcde_t::GR1AB8

union { ... } st_glcde_t::GR1AB9

union { ... } st_glcde_t::GR1BASE

union { ... } st_glcde_t::GR1CLUT0[256]

union { ... } st_glcde_t::GR1CLUT1[256]

union { ... } st_glcde_t::GR1CLUTINT

unsigned long st_glcde_t::GR1FLM2

union { ... } st_glcde_t::GR1FLM3

union { ... } st_glcde_t::GR1FLM5

union { ... } st_glcde_t::GR1FLM6

union { ... } st_glcde_t::GR1FLMRD

union { ... } st_glcde_t::GR1MON

union { ... } st_glcde_t::GR1VEN

union { ... } st_glcde_t::GR2AB1

union { ... } st_glcde_t::GR2AB2

union { ... } st_glcde_t::GR2AB3

union { ... } st_glcde_t::GR2AB4

union { ... } st_glcde_t::GR2AB5

union { ... } st_glcde_t::GR2AB6

union { ... } st_glcde_t::GR2AB7

union { ... } st_glcde_t::GR2AB8

union { ... } st_glcde_t::GR2AB9

union { ... } st_glcde_t::GR2BASE

union { ... } st_glcde_t::GR2CLUT0[256]

union { ... } st_glcde_t::GR2CLUT1[256]

union { ... } st_glcde_t::GR2CLUTINT

unsigned long st_glcdc_t::GR2FLM2

union { ... } st_glcdc_t::GR2FLM3

union { ... } st_glcdc_t::GR2FLM5

union { ... } st_glcdc_t::GR2FLM6

union { ... } st_glcdc_t::GR2FLMRD

union { ... } st_glcdc_t::GR2MON

union { ... } st_glcdc_t::GR2VEN

union { ... } st_glcdc_t::INTEN

union { ... } st_glcdc_t::OUTSET

union { ... } st_glcdc_t::OUTVEN

union { ... } st_glcdc_t::PANELCLK

union { ... } st_glcdc_t::PANELDTHA

union { ... } st_glcdc_t::STCLR

union { ... } st_glcdc_t::STMON

union { ... } st_glcdc_t::TCONDE

union { ... } st_glcdc_t::TCONSTHA1

union { ... } st_glcdc_t::TCONSTHA2

union { ... } st_glcdc_t::TCONSTHB1

union { ... } st_glcdc_t::TCONSTHB2

union { ... } st_glcdc_t::TCONSTVA1

union { ... } st_glcdc_t::TCONSTVA2

union { ... } st_glcdc_t::TCONSTVB1

union { ... } st_glcdc_t::TCONSTVB2

union { ... } st_glcdc_t::TCONTIM

char st_glcdc_t::wk0[228]

char st_glcdc_t::wk1[4]

char st_glcde_t::wk10[4]

char st_glcde_t::wk11[4]

char st_glcde_t::wk12[4]

char st_glcde_t::wk13[4]

char st_glcde_t::wk14[12]

char st_glcde_t::wk15[28]

char st_glcde_t::wk16[20]

char st_glcde_t::wk2[4]

char st_glcde_t::wk3[8]

char st_glcde_t::wk4[168]

char st_glcde_t::wk5[4]


char st_glcde_t::wk6[4]

char st_glcde_t::wk7[8]

char st_glcde_t::wk8[168]

char st_glcde_t::wk9[4]

```
#include <iodefine.h>
```

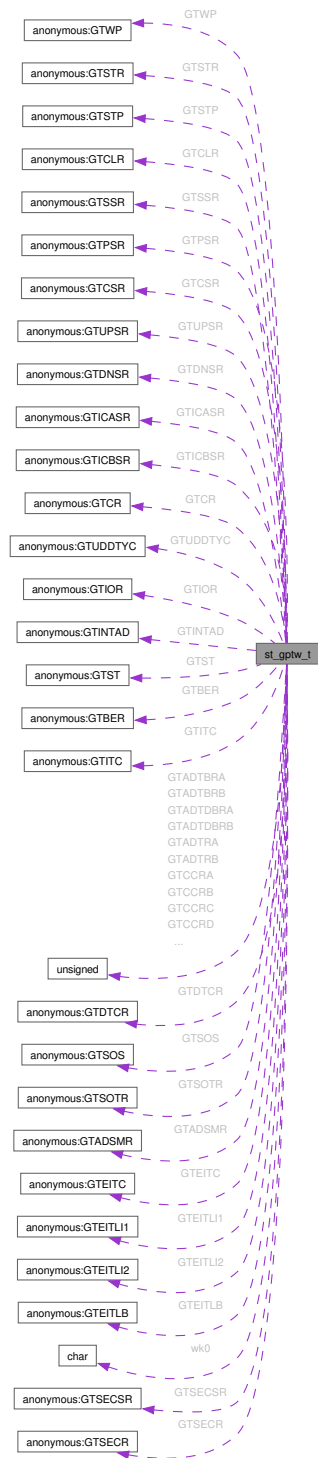

unsigned long st_gptw_t::GTADTBRA

unsigned long st_gptw_t::GTADTBRB

unsigned long st_gptw_t::GTADTDBRA

unsigned long st_gptw_t::GTADTDBRB

unsigned long st_gptw_t::GTADTRA

unsigned long st_gptw_t::GTADTRB

union { ... } st_gptw_t::GTBER

unsigned long st_gptw_t::GTCCRA

unsigned long st_gptw_t::GTCCRB

unsigned long st_gptw_t::GTCCRC

unsigned long st_gptw_t::GTCCRD

unsigned long st_gptw_t::GTCCRE

unsigned long st_gptw_t::GTCCRF

union { ... } st_gptw_t::GTCLR

unsigned long st_gptw_t::GTCNT

union { ... } st_gptw_t::GTCR

union { ... } st_gptw_t::GTCSR

unsigned long st_gptw_t::GTDBD

unsigned long st_gptw_t::GTDBU

union { ... } st_gptw_t::GTDNSR

union { ... } st_gptw_t::GTDTCR

unsigned long st_gptw_t::GTDVD

unsigned long st_gptw_t::GTDVU

union { ... } st_gptw_t::GTEITC

union { ... } st_gptw_t::GTEITLB

union { ... } st_gptw_t::GTEITLI1

union { ... } st_gptw_t::GTEITLI2

union { ... } st_gptw_t::GTICASR

union { ... } st_gptw_t::GTICBSR

union { ... } st_gptw_t::GTINTAD

union { ... } st_gptw_t::GTIOR

union { ... } st_gptw_t::GTITC

unsigned long st_gptw_t::GTPBR

unsigned long st_gptw_t::GTPDBR

unsigned long st_gptw_t::GTPR

union { ... } st_gptw_t::GTPSR

union { ... } st_gptw_t::GTSECR

union { ... } st_gptw_t::GTSECSR

union { ... } st_gptw_t::GTSOS

union { ... } st_gptw_t::GTSOTR

```
union { ... } st_gptw_t::GTSSR
union { ... } st_gptw_t::GTST
union { ... } st_gptw_t::GTSTP
union { ... } st_gptw_t::GTSTR
union { ... } st_gptw_t::GTUDDTYC
union { ... } st_gptw_t::GTUPSR
union { ... } st_gptw_t::GTWP
char st_gptw_t::wk0[24]
```

```
#include <iodefne.h>
```



unsigned char st_icu_t::DMRSR0

unsigned char st_icu_t::DMRSR1

unsigned char st_icu_t::DMRSR2

unsigned char st_icu_t::DMRSR3

unsigned char st_icu_t::DMRSR4

unsigned char st_icu_t::DMRSR5

unsigned char st_icu_t::DMRSR6

unsigned char st_icu_t::DMRSR7

union { ... } st_icu_t::DTCER[256]

union { ... } st_icu_t::EXNMICLR

union { ... } st_icu_t::EXNMIER

union { ... } st_icu_t::EXNMISR

union { ... } st_icu_t::FIR

union { ... } st_icu_t::GCRBE0

union { ... } st_icu_t::GCRIE0

union { ... } st_icu_t::GENAL0

union { ... } st_icu_t::GENAL1

union { ... } st_icu_t::GENBE0

union { ... } st_icu_t::GENBL0

union { ... } st_icu_t::GENBL1

union { ... } st_icu_t::GENBL2

union { ... } st_icu_t::GENIE0

union { ... } st_icu_t::GRPAL0

union { ... } st_icu_t::GRPAL1

union { ... } st_icu_t::GRPBEO

union { ... } st_icu_t::GRPBL0

union { ... } st_icu_t::GRPBL1

union { ... } st_icu_t::GRPBL2

union { ... } st_icu_t::GRPIEO

union { ... } st_icu_t::IER[32]

union { ... } st_icu_t::IPR[256]

union { ... } st_icu_t::IR[256]

union { ... } st_icu_t::IRQCR[16]

union { ... } st_icu_t::IRQFLTC0

union { ... } st_icu_t::IRQFLTC1

union { ... } st_icu_t::IRQFLTE0

union { ... } st_icu_t::IRQFLTE1

union { ... } st_icu_t::NMICLR

union { ... } st_icu_t::NMICR

union { ... } st_icu_t::NMIER

union { ... } st_icu_t::NMIFLTC

union { ... } st_icu_t::NMIFLTE

union { ... } st_icu_t::NMISR

union { ... } st_icu_t::PIAR0

union { ... } st_icu_t::PIAR1

union { ... } st_icu_t::PIAR2

union { ... } st_icu_t::PIAR3

union { ... } st_icu_t::PIAR4

union { ... } st_icu_t::PIAR5

union { ... } st_icu_t::PIAR6

union { ... } st_icu_t::PIAR7

union { ... } st_icu_t::PIAR8

union { ... } st_icu_t::PIAR9

union { ... } st_icu_t::PIARA

union { ... } st_icu_t::PIARC

union { ... } st_icu_t::PIBR0

union { ... } st_icu_t::PIBR1

union { ... } st_icu_t::PIBR2

union { ... } st_icu_t::PIBR3

union { ... } st_icu_t::PIBR4

union { ... } st_icu_t::PIBR5

union { ... } st_icu_t::PIBR6

union { ... } st_icu_t::PIBR7

union { ... } st_icu_t::PIBR8

union { ... } st_icu_t::PIBR9

union { ... } st_icu_t::PIBRA

union { ... } st_icu_t::PIBRB

union { ... } st_icu_t::SELEXDR

union { ... } st_icu_t::SLIAR208

union { ... } st_icu_t::SLIAR209

union { ... } st_icu_t::SLIAR210

union { ... } st_icu_t::SLIAR211

union { ... } st_icu_t::SLIAR212

union { ... } st_icu_t::SLIAR213

union { ... } st_icu_t::SLIAR214

union { ... } st_icu_t::SLIAR215

union { ... } st_icu_t::SLIAR216

union { ... } st_icu_t::SLIAR217

union { ... } st_icu_t::SLIAR218

union { ... } st_icu_t::SLIAR219

union { ... } st_icu_t::SLIAR220

union { ... } st_icu_t::SLIAR221

union { ... } st_icu_t::SLIAR222

union { ... } st_icu_t::SLIAR223

union { ... } st_icu_t::SLIAR224

union { ... } st_icu_t::SLIAR225

union { ... } st_icu_t::SLIAR226

union { ... } st_icu_t::SLIAR227

union { ... } st_icu_t::SLIAR228

union { ... } st_icu_t::SLIAR229

union { ... } st_icu_t::SLIAR230

union { ... } st_icu_t::SLIAR231

union { ... } st_icu_t::SLIAR232

union { ... } st_icu_t::SLIAR233

union { ... } st_icu_t::SLIAR234

union { ... } st_icu_t::SLIAR235

union { ... } st_icu_t::SLIAR236

union { ... } st_icu_t::SLIAR237

union { ... } st_icu_t::SLIAR238

union { ... } st_icu_t::SLIAR239

union { ... } st_icu_t::SLIAR240

union { ... } st_icu_t::SLIAR241

union { ... } st_icu_t::SLIAR242

union { ... } st_icu_t::SLIAR243

union { ... } st_icu_t::SLIAR244

union { ... } st_icu_t::SLIAR245

union { ... } st_icu_t::SLIAR246

union { ... } st_icu_t::SLIAR247

union { ... } st_icu_t::SLIAR248

union { ... } st_icu_t::SLIAR249

union { ... } st_icu_t::SLIAR250

union { ... } st_icu_t::SLIAR251

union { ... } st_icu_t::SLIAR252

union { ... } st_icu_t::SLIAR253

union { ... } st_icu_t::SLIAR254

union { ... } st_icu_t::SLIAR255

union { ... } st_icu_t::SLIBR144

union { ... } st_icu_t::SLIBR145

union { ... } st_icu_t::SLIBR146

union { ... } st_icu_t::SLIBR147

union { ... } st_icu_t::SLIBR148

union { ... } st_icu_t::SLIBR149

union { ... } st_icu_t::SLIBR150

union { ... } st_icu_t::SLIBR151

union { ... } st_icu_t::SLIBR152

union { ... } st_icu_t::SLIBR153

union { ... } st_icu_t::SLIBR154

union { ... } st_icu_t::SLIBR155

union { ... } st_icu_t::SLIBR156

union { ... } st_icu_t::SLIBR157

union { ... } st_icu_t::SLIBR158

union { ... } st_icu_t::SLIBR159

union { ... } st_icu_t::SLIBR160

union { ... } st_icu_t::SLIBR161

union { ... } st_icu_t::SLIBR162

union { ... } st_icu_t::SLIBR163

union { ... } st_icu_t::SLIBR164

union { ... } st_icu_t::SLIBR165

union { ... } st_icu_t::SLIBR166

union { ... } st_icu_t::SLIBR167

union { ... } st_icu_t::SLIBR168

union { ... } st_icu_t::SLIBR169

union { ... } st_icu_t::SLIBR170

union { ... } st_icu_t::SLIBR171

union { ... } st_icu_t::SLIBR172

union { ... } st_icu_t::SLIBR173

union { ... } st_icu_t::SLIBR174

union { ... } st_icu_t::SLIBR175

union { ... } st_icu_t::SLIBR176

union { ... } st_icu_t::SLIBR177

union { ... } st_icu_t::SLIBR178

union { ... } st_icu_t::SLIBR179

union { ... } st_icu_t::SLIBR180

union { ... } st_icu_t::SLIBR181

union { ... } st_icu_t::SLIBR182

union { ... } st_icu_t::SLIBR183

union { ... } st_icu_t::SLIBR184

union { ... } st_icu_t::SLIBR185

union { ... } st_icu_t::SLIBR186

union { ... } st_icu_t::SLIBR187

union { ... } st_icu_t::SLIBR188

union { ... } st_icu_t::SLIBR189

union { ... } st_icu_t::SLIBR190

union { ... } st_icu_t::SLIBR191

union { ... } st_icu_t::SLIBR192

union { ... } st_icu_t::SLIBR193

union { ... } st_icu_t::SLIBR194

union { ... } st_icu_t::SLIBR195

union { ... } st_icu_t::SLIBR196

union { ... } st_icu_t::SLIBR197

union { ... } st_icu_t::SLIBR198

union { ... } st_icu_t::SLIBR199

union { ... } st_icu_t::SLIBR200

union { ... } st_icu_t::SLIBR201

union { ... } st_icu_t::SLIBR202

union { ... } st_icu_t::SLIBR203

union { ... } st_icu_t::SLIBR204

union { ... } st_icu_t::SLIBR205

union { ... } st_icu_t::SLIBR206

union { ... } st_icu_t::SLIBR207

union { ... } st_icu_t::SLIBXR128

union { ... } st_icu_t::SLIBXR129

union { ... } st_icu_t::SLIBXR130

union { ... } st_icu_t::SLIBXR131

union { ... } st_icu_t::SLIBXR132

union { ... } st_icu_t::SLIBXR133

union { ... } st_icu_t::SLIBXR134

union { ... } st_icu_t::SLIBXR135

union { ... } st_icu_t::SLIBXR136

union { ... } st_icu_t::SLIBXR137

union { ... } st_icu_t::SLIBXR138

union { ... } st_icu_t::SLIBXR139

union { ... } st_icu_t::SLIBXR140

union { ... } st_icu_t::SLIBXR141

union { ... } st_icu_t::SLIBXR142

union { ... } st_icu_t::SLIBXR143

union { ... } st_icu_t::SLIPRCR

union { ... } st_icu_t::SWINT2R

```
union { ... } st_icu_t::SWINTR
```

```
char st_icu_t::wk0[192]
```

```
char st_icu_t::wk1[14]
```

```
char st_icu_t::wk10[227]
```

```
char st_icu_t::wk11[16]
```

```
char st_icu_t::wk12[6]
```

```
char st_icu_t::wk13[84]
```

```
char st_icu_t::wk14[9]
```

```
char st_icu_t::wk15[3]
```

```
char st_icu_t::wk16[27]
```

```
char st_icu_t::wk17[68]
```

```
char st_icu_t::wk18[44]
```

```
char st_icu_t::wk19[4]
```

```
char st_icu_t::wk2[14]
```

```
char st_icu_t::wk20[44]
```

char st_icu_t::wk21[4]

char st_icu_t::wk22[124]

char st_icu_t::wk23[116]

char st_icu_t::wk24[96]

char st_icu_t::wk25[56]

char st_icu_t::wk26[136]

char st_icu_t::wk27[1]

char st_icu_t::wk28[195]

char st_icu_t::wk3[3]

char st_icu_t::wk4[3]

char st_icu_t::wk5[3]


char st_icu_t::wk6[3]

char st_icu_t::wk7[3]

char st_icu_t::wk8[3]

char st_icu_t::wk9[3]

```
#include <iodef.h>
```

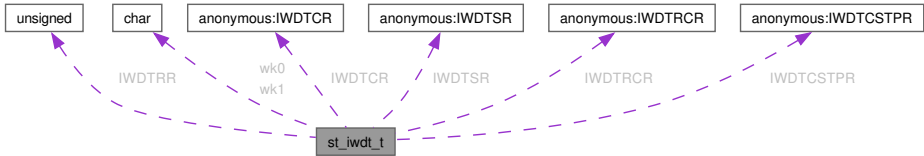

union { ... } st_iwdt_t::IWDTCR

union { ... } st_iwdt_t::IWDTCSTPR

union { ... } st_iwdt_t::IWDTRCR


unsigned char st_iwdt_t::IWDTRR

union { ... } st_iwdt_t::IWDTSR

char st_iwdt_t::wk0[1]

char st_iwdt_t::wk1[1]

```
#include <iodef.h>
```

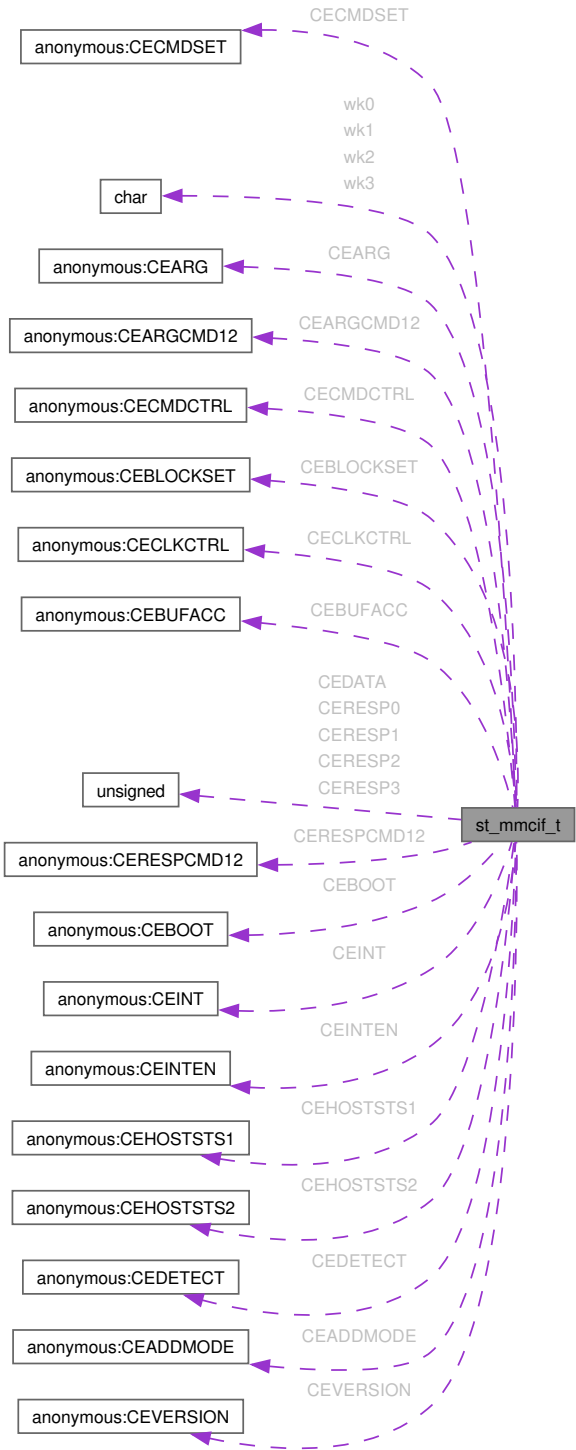

union { ... } st_mmcif_t::CEADDMODE

union { ... } st_mmcif_t::CEARG

union { ... } st_mmcif_t::CEARGCMD12

union { ... } st_mmcif_t::CEBLOCKSET

union { ... } st_mmcif_t::CEBOOT

union { ... } st_mmcif_t::CEBUFACC

union { ... } st_mmcif_t::CECLKCTRL

union { ... } st_mmcif_t::CECMDCTRL

union { ... } st_mmcif_t::CECMDSET

unsigned long st_mmcif_t::CEDATA

union { ... } st_mmcif_t::CEDETECT

union { ... } st_mmcif_t::CEHOSTSTS1

union { ... } st_mmcif_t::CEHOSTSTS2

union { ... } st_mmcif_t::CEINT

union { ... } st_mmcif_t::CEINTEN

unsigned long st_mmcif_t::CERESP0

unsigned long st_mmcif_t::CERESP1

unsigned long st_mmcif_t::CERESP2

unsigned long st_mmcif_t::CERESP3

union { ... } st_mmcif_t::CERESPCMD12

union { ... } st_mmcif_t::CEVERSION


char st_mmcif_t::wk0[4]

char st_mmcif_t::wk1[4]

char st_mmcif_t::wk2[32]

char st_mmcif_t::wk3[4]

```
#include <iodefine.h>
```



union { ... } st_mpc_t::P00PFS

union { ... } st_mpc_t::P01PFS

union { ... } st_mpc_t::P02PFS

union { ... } st_mpc_t::P03PFS

union { ... } st_mpc_t::P05PFS

union { ... } st_mpc_t::P07PFS

union { ... } st_mpc_t::P10PFS

union { ... } st_mpc_t::P11PFS

union { ... } st_mpc_t::P12PFS

union { ... } st_mpc_t::P13PFS

union { ... } st_mpc_t::P14PFS

union { ... } st_mpc_t::P15PFS

union { ... } st_mpc_t::P16PFS

union { ... } st_mpc_t::P17PFS

union { ... } st_mpc_t::P20PFS

union { ... } st_mpc_t::P21PFS

union { ... } st_mpc_t::P22PFS

union { ... } st_mpc_t::P23PFS

union { ... } st_mpc_t::P24PFS

union { ... } st_mpc_t::P25PFS

union { ... } st_mpc_t::P26PFS

union { ... } st_mpc_t::P27PFS

union { ... } st_mpc_t::P30PFS

union { ... } st_mpc_t::P31PFS

union { ... } st_mpc_t::P32PFS

union { ... } st_mpc_t::P33PFS

union { ... } st_mpc_t::P34PFS

union { ... } st_mpc_t::P40PFS

union { ... } st_mpc_t::P41PFS

union { ... } st_mpc_t::P42PFS

union { ... } st_mpc_t::P43PFS

union { ... } st_mpc_t::P44PFS

union { ... } st_mpc_t::P45PFS

union { ... } st_mpc_t::P46PFS

union { ... } st_mpc_t::P47PFS

union { ... } st_mpc_t::P50PFS

union { ... } st_mpc_t::P51PFS

union { ... } st_mpc_t::P52PFS

union { ... } st_mpc_t::P54PFS

union { ... } st_mpc_t::P55PFS

union { ... } st_mpc_t::P56PFS

union { ... } st_mpc_t::P57PFS

union { ... } st_mpc_t::P60PFS

union { ... } st_mpc_t::P61PFS

union { ... } st_mpc_t::P62PFS

union { ... } st_mpc_t::P63PFS

union { ... } st_mpc_t::P64PFS

union { ... } st_mpc_t::P66PFS

union { ... } st_mpc_t::P67PFS

union { ... } st_mpc_t::P71PFS

union { ... } st_mpc_t::P72PFS

union { ... } st_mpc_t::P73PFS

union { ... } st_mpc_t::P74PFS

union { ... } st_mpc_t::P75PFS

union { ... } st_mpc_t::P76PFS

union { ... } st_mpc_t::P77PFS

union { ... } st_mpc_t::P80PFS

union { ... } st_mpc_t::P81PFS

union { ... } st_mpc_t::P82PFS

union { ... } st_mpc_t::P83PFS

union { ... } st_mpc_t::P84PFS

union { ... } st_mpc_t::P85PFS

union { ... } st_mpc_t::P86PFS

union { ... } st_mpc_t::P87PFS

union { ... } st_mpc_t::P90PFS

union { ... } st_mpc_t::P91PFS

union { ... } st_mpc_t::P92PFS

union { ... } st_mpc_t::P93PFS

union { ... } st_mpc_t::P94PFS

union { ... } st_mpc_t::P95PFS

union { ... } st_mpc_t::P96PFS

union { ... } st_mpc_t::P97PFS

union { ... } st_mpc_t::PA0PFS

union { ... } st_mpc_t::PA1PFS

union { ... } st_mpc_t::PA2PFS

union { ... } st_mpc_t::PA3PFS

union { ... } st_mpc_t::PA4PFS

union { ... } st_mpc_t::PA5PFS

union { ... } st_mpc_t::PA6PFS

union { ... } st_mpc_t::PA7PFS

union { ... } st_mpc_t::PB0PFS

union { ... } st_mpc_t::PB1PFS

union { ... } st_mpc_t::PB2PFS

union { ... } st_mpc_t::PB3PFS

union { ... } st_mpc_t::PB4PFS

union { ... } st_mpc_t::PB5PFS

union { ... } st_mpc_t::PB6PFS

union { ... } st_mpc_t::PB7PFS

union { ... } st_mpc_t::PC0PFS

union { ... } st_mpc_t::PC1PFS

union { ... } st_mpc_t::PC2PFS

union { ... } st_mpc_t::PC3PFS

union { ... } st_mpc_t::PC4PFS

union { ... } st_mpc_t::PC5PFS

union { ... } st_mpc_t::PC6PFS

union { ... } st_mpc_t::PC7PFS

union { ... } st_mpc_t::PD0PFS

union { ... } st_mpc_t::PD1PFS

union { ... } st_mpc_t::PD2PFS

union { ... } st_mpc_t::PD3PFS

union { ... } st_mpc_t::PD4PFS

union { ... } st_mpc_t::PD5PFS

union { ... } st_mpc_t::PD6PFS

union { ... } st_mpc_t::PD7PFS

union { ... } st_mpc_t::PE0PFS

union { ... } st_mpc_t::PE1PFS

union { ... } st_mpc_t::PE2PFS

union { ... } st_mpc_t::PE3PFS

union { ... } st_mpc_t::PE4PFS

union { ... } st_mpc_t::PE5PFS

union { ... } st_mpc_t::PE6PFS

union { ... } st_mpc_t::PE7PFS

union { ... } st_mpc_t::PF0PFS

union { ... } st_mpc_t::PF1PFS

union { ... } st_mpc_t::PF2PFS

union { ... } st_mpc_t::PF5PFS

union { ... } st_mpc_t::PFAOE0

union { ... } st_mpc_t::PFAOE1

union { ... } st_mpc_t::PFBCR0

union { ... } st_mpc_t::PFBCR1

union { ... } st_mpc_t::PFBCR2

union { ... } st_mpc_t::PFBCR3

union { ... } st_mpc_t::PFCSE

union { ... } st_mpc_t::PFCSS0

union { ... } st_mpc_t::PFCSS1

union { ... } st_mpc_t::PFENET

union { ... } st_mpc_t::PG0PFS

union { ... } st_mpc_t::PG1PFS

union { ... } st_mpc_t::PG2PFS

union { ... } st_mpc_t::PG3PFS

union { ... } st_mpc_t::PG4PFS

union { ... } st_mpc_t::PG5PFS

union { ... } st_mpc_t::PG6PFS

union { ... } st_mpc_t::PG7PFS

union { ... } st_mpc_t::PH0PFS

union { ... } st_mpc_t::PH1PFS

union { ... } st_mpc_t::PH2PFS

union { ... } st_mpc_t::PH3PFS

union { ... } st_mpc_t::PH4PFS

union { ... } st_mpc_t::PH5PFS

union { ... } st_mpc_t::PH6PFS

union { ... } st_mpc_t::PH7PFS

union { ... } st_mpc_t::PJ0PFS

union { ... } st_mpc_t::PJ1PFS

union { ... } st_mpc_t::PJ2PFS

union { ... } st_mpc_t::PJ3PFS

union { ... } st_mpc_t::PJ5PFS

union { ... } st_mpc_t::PK0PFS

union { ... } st_mpc_t::PK1PFS

union { ... } st_mpc_t::PK2PFS

union { ... } st_mpc_t::PK3PFS

union { ... } st_mpc_t::PK4PFS

union { ... } st_mpc_t::PK5PFS

union { ... } st_mpc_t::PK6PFS

union { ... } st_mpc_t::PK7PFS

union { ... } st_mpc_t::PL0PFS

union { ... } st_mpc_t::PL1PFS

union { ... } st_mpc_t::PL2PFS

union { ... } st_mpc_t::PL3PFS

union { ... } st_mpc_t::PL4PFS

union { ... } st_mpc_t::PL5PFS

union { ... } st_mpc_t::PL6PFS

union { ... } st_mpc_t::PL7PFS

union { ... } st_mpc_t::PM0PFS

union { ... } st_mpc_t::PM1PFS

union { ... } st_mpc_t::PM2PFS

union { ... } st_mpc_t::PM3PFS

union { ... } st_mpc_t::PM4PFS

union { ... } st_mpc_t::PM5PFS

union { ... } st_mpc_t::PM6PFS

union { ... } st_mpc_t::PM7PFS

union { ... } st_mpc_t::PN0PFS

union { ... } st_mpc_t::PN1PFS

union { ... } st_mpc_t::PN2PFS

union { ... } st_mpc_t::PN3PFS

union { ... } st_mpc_t::PN4PFS

union { ... } st_mpc_t::PN5PFS

union { ... } st_mpc_t::PQ0PFS

union { ... } st_mpc_t::PQ1PFS

union { ... } st_mpc_t::PQ2PFS

union { ... } st_mpc_t::PQ3PFS

union { ... } st_mpc_t::PQ4PFS

union { ... } st_mpc_t::PQ5PFS

union { ... } st_mpc_t::PQ6PFS

union { ... } st_mpc_t::PQ7PFS

union { ... } st_mpc_t::PWPR

char st_mpc_t::wk0[1]

char st_mpc_t::wk1[4]

char st_mpc_t::wk10[2]

char st_mpc_t::wk11[2]

char st_mpc_t::wk12[1]

char st_mpc_t::wk13[2]

char st_mpc_t::wk14[2]

char st_mpc_t::wk2[16]

char st_mpc_t::wk3[32]

char st_mpc_t::wk4[1]

char st_mpc_t::wk5[1]


char st_mpc_t::wk6[3]

char st_mpc_t::wk7[1]

char st_mpc_t::wk8[1]

```
char st_mpc_t::wk9[1]
```

```
#include <iodefine.h>
```

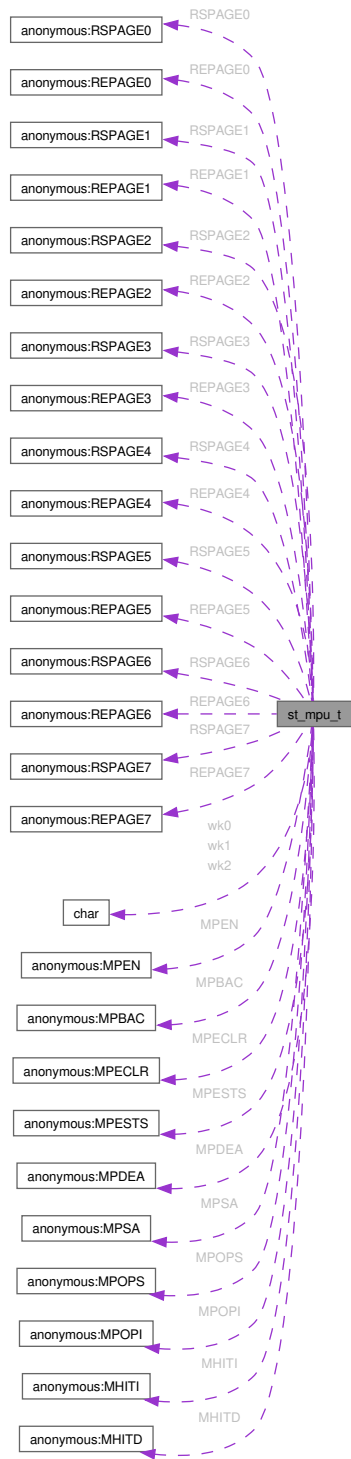

union { ... } st_mpu_t::MHITD

union { ... } st_mpu_t::MHITI

union { ... } st_mpu_t::MPBAC

union { ... } st_mpu_t::MPDEA

union { ... } st_mpu_t::MPECLR

union { ... } st_mpu_t::MPEN

union { ... } st_mpu_t::MPESTS

union { ... } st_mpu_t::MPOPI

union { ... } st_mpu_t::MPOPS

union { ... } st_mpu_t::MPSA

union { ... } st_mpu_t::REPAGE0

union { ... } st_mpu_t::REPAGE1

union { ... } st_mpu_t::REPAGE2

union { ... } st_mpu_t::REPAGE3

union { ... } st_mpu_t::REPAGE4

union { ... } st_mpu_t::REPAGE5

union { ... } st_mpu_t::REPAGE6

union { ... } st_mpu_t::REPAGE7

union { ... } st_mpu_t::RSPAGE0

union { ... } st_mpu_t::RSPAGE1

union { ... } st_mpu_t::RSPAGE2

union { ... } st_mpu_t::RSPAGE3

union { ... } st_mpu_t::RSPAGE4

union { ... } st_mpu_t::RSPAGE5

union { ... } st_mpu_t::RSPAGE6


union { ... } st_mpu_t::RSPAGE7

char st_mpu_t::wk0[192]

char st_mpu_t::wk1[4]

char st_mpu_t::wk2[8]

```
#include <iodefine.h>
```

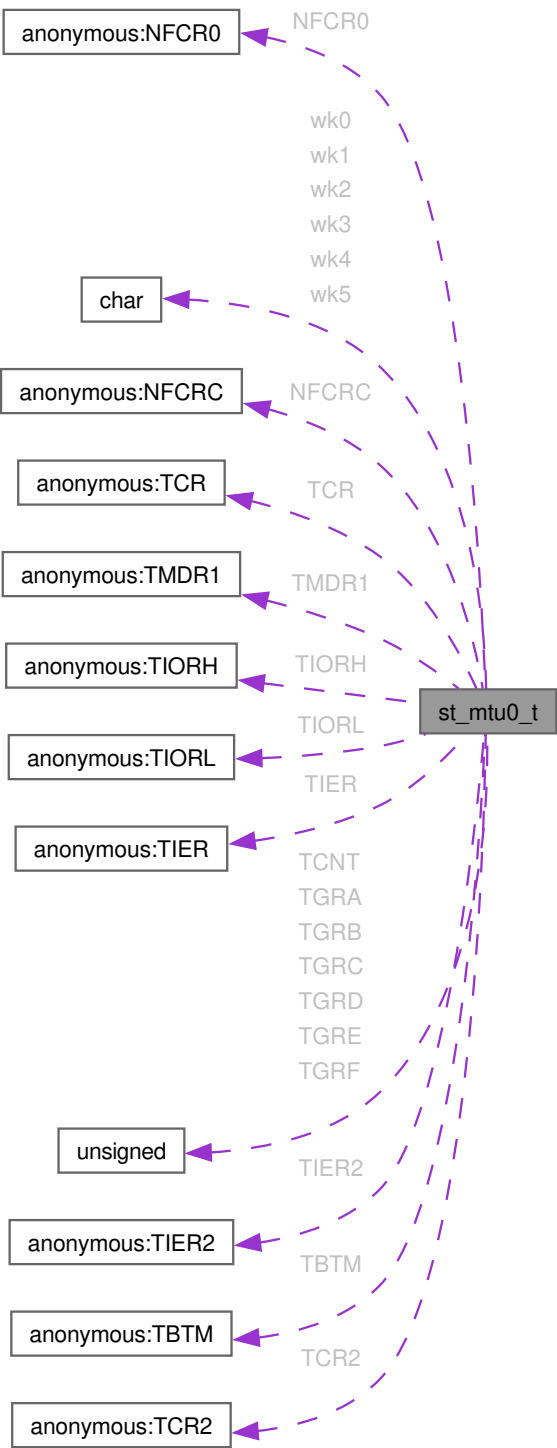

union { ... } st_mtu0_t::NFCR0

union { ... } st_mtu0_t::NFCRC

union { ... } st_mtu0_t::TBTM

unsigned short st_mtu0_t::TCNT

union { ... } st_mtu0_t::TCR

union { ... } st_mtu0_t::TCR2

unsigned short st_mtu0_t::TGRA

unsigned short st_mtu0_t::TGRB

unsigned short st_mtu0_t::TGRC

unsigned short st_mtu0_t::TGRD

unsigned short st_mtu0_t::TGRE

unsigned short st_mtu0_t::TGRF

union { ... } st_mtu0_t::TIER

union { ... } st_mtu0_t::TIER2

union { ... } st_mtu0_t::TIORH

union { ... } st_mtu0_t::TIORL

union { ... } st_mtu0_t::TMDR1

char st_mtu0_t::wk0[8]

char st_mtu0_t::wk1[102]


char st_mtu0_t::wk2[1]

```
char st_mtu0_t::wk3[16]
```

```
char st_mtu0_t::wk4[1]
```

```
char st_mtu0_t::wk5[1]
```

```
#include <iodef.h>
```

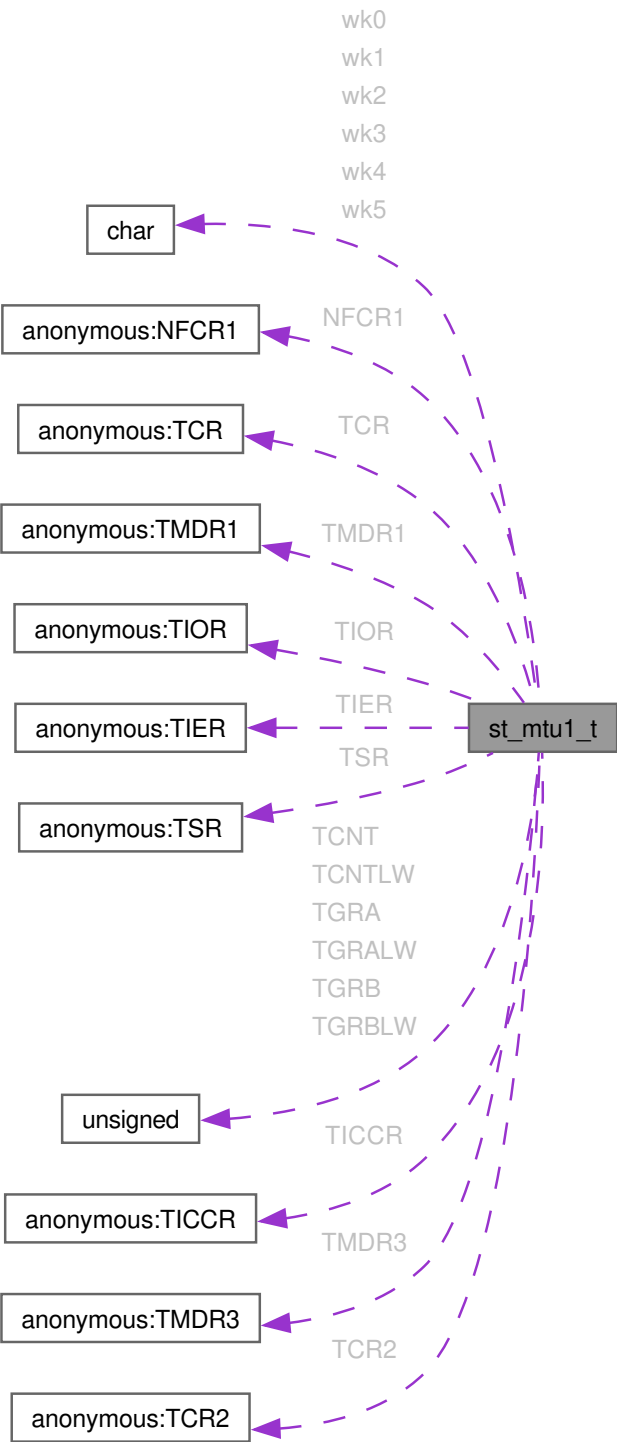

union { ... } st_mtu1_t::NFCR1

unsigned short st_mtu1_t::TCNT

unsigned long st_mtu1_t::TCNTLW

union { ... } st_mtu1_t::TCR

union { ... } st_mtu1_t::TCR2

unsigned short st_mtu1_t::TGRA

unsigned long st_mtu1_t::TGRALW

unsigned short st_mtu1_t::TGRB

unsigned long st_mtu1_t::TGRBLW

union { ... } st_mtu1_t::TICCR

union { ... } st_mtu1_t::TIER

union { ... } st_mtu1_t::TIOR

union { ... } st_mtu1_t::TMDR1

union { ... } st_mtu1_t::TMDR3

union { ... } st_mtu1_t::TSR

char st_mtu1_t::wk0[1]

char st_mtu1_t::wk1[238]


char st_mtu1_t::wk2[1]

char st_mtu1_t::wk3[4]

char st_mtu1_t::wk4[2]

char st_mtu1_t::wk5[11]

```
#include <iodef.h>
```

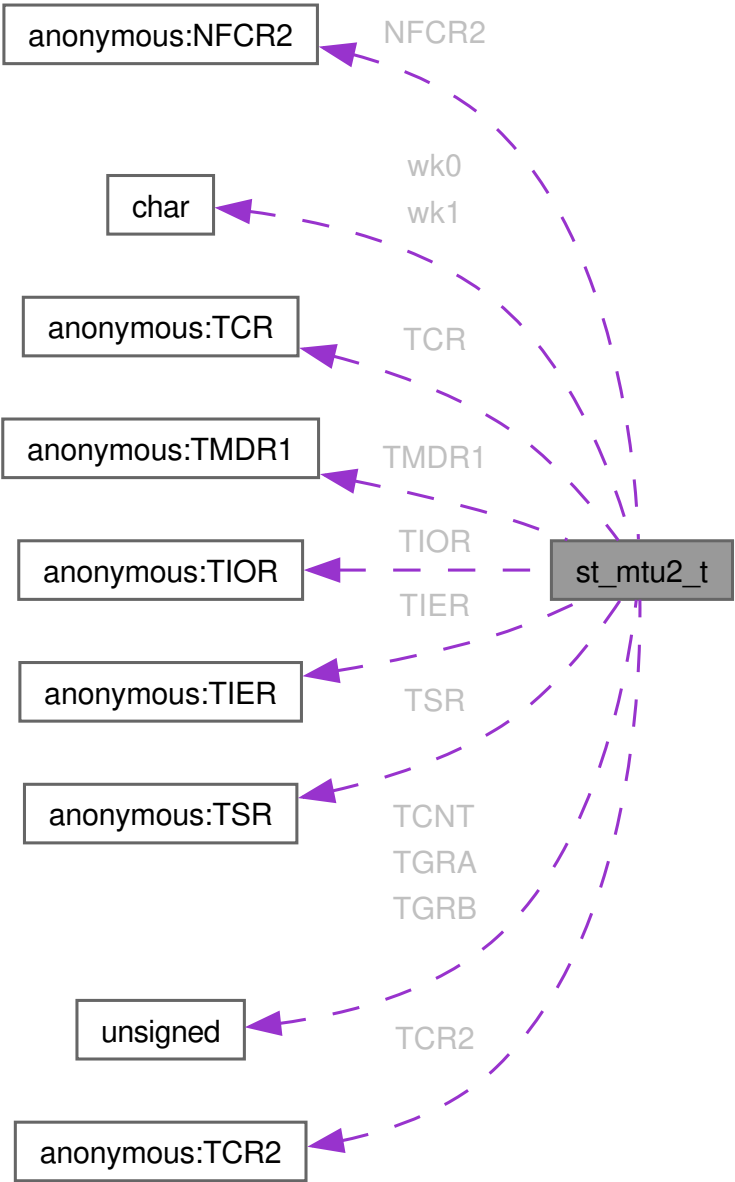

union { ... } st_mtu2_t::NFCR2

unsigned short st_mtu2_t::TCNT

union { ... } st_mtu2_t::TCR

union { ... } st_mtu2_t::TCR2

unsigned short st_mtu2_t::TGRA

unsigned short st_mtu2_t::TGRB

union { ... } st_mtu2_t::TIER

union { ... } st_mtu2_t::TIOR


union { ... } st_mtu2_t::TMDR1

union { ... } st_mtu2_t::TSR

char st_mtu2_t::wk0[365]

char st_mtu2_t::wk1[1]

```
#include <iodefine.h>
```

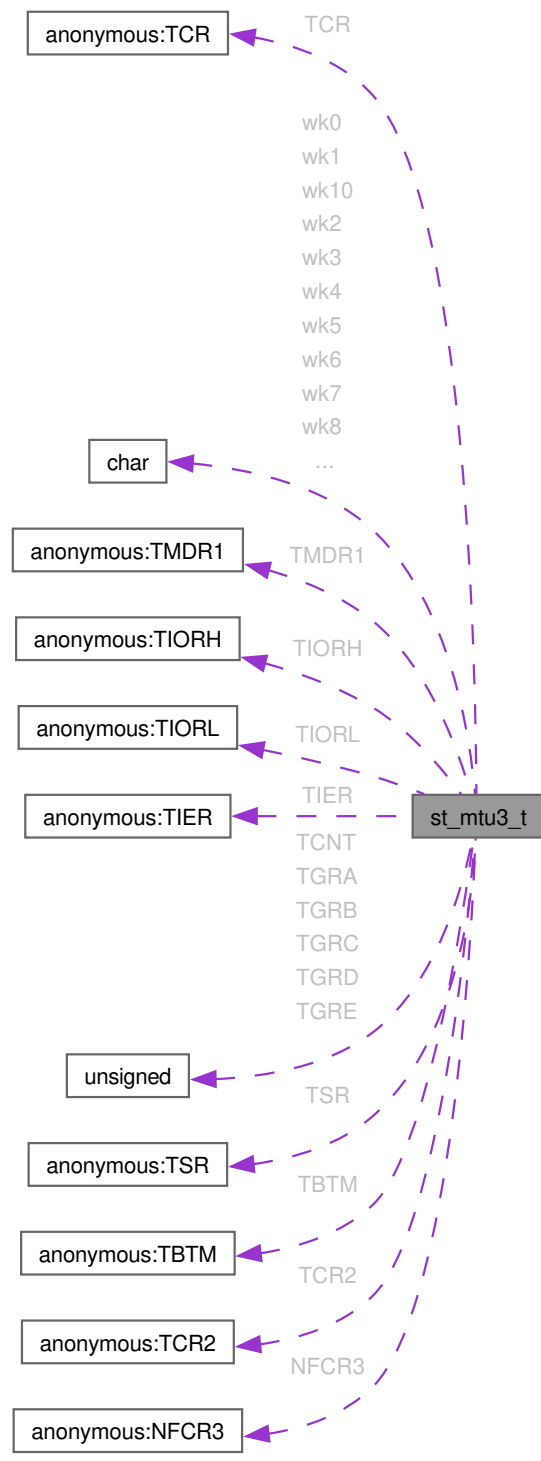

union { ... } st_mtu3_t::NFCR3

union { ... } st_mtu3_t::TBTM

unsigned short st_mtu3_t::TCNT

union { ... } st_mtu3_t::TCR

union { ... } st_mtu3_t::TCR2

unsigned short st_mtu3_t::TGRA

unsigned short st_mtu3_t::TGRB

unsigned short st_mtu3_t::TGRC

unsigned short st_mtu3_t::TGRD

unsigned short st_mtu3_t::TGRE

union { ... } st_mtu3_t::TIER

union { ... } st_mtu3_t::TIORH

union { ... } st_mtu3_t::TIORL

union { ... } st_mtu3_t::TMDR1

union { ... } st_mtu3_t::TSR

char st_mtu3_t::wk0[1]

char st_mtu3_t::wk1[1]

char st_mtu3_t::wk10[31]

char st_mtu3_t::wk2[2]

char st_mtu3_t::wk3[7]

char st_mtu3_t::wk4[6]

char st_mtu3_t::wk5[8]


char st_mtu3_t::wk6[4]

char st_mtu3_t::wk7[11]

char st_mtu3_t::wk8[19]

char st_mtu3_t::wk9[37]

```
#include <iodefine.h>
```

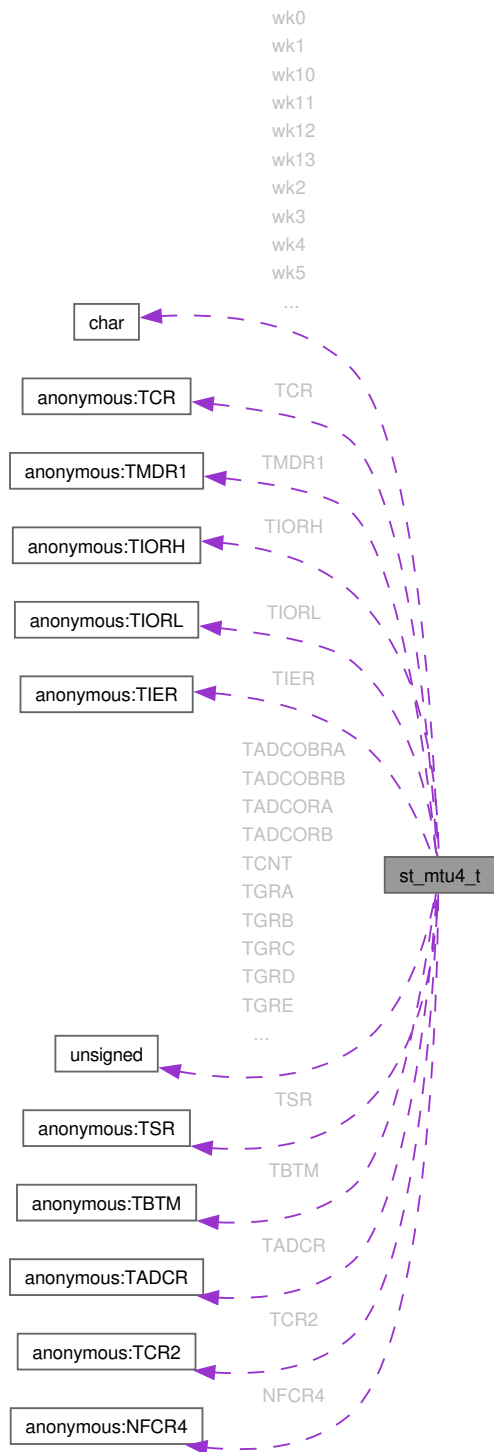

union { ... } st_mtu4_t::NFCR4

unsigned short st_mtu4_t::TADCOBRA

unsigned short st_mtu4_t::TADCOBRB

unsigned short st_mtu4_t::TADCORA

unsigned short st_mtu4_t::TADCORB

union { ... } st_mtu4_t::TADCR

union { ... } st_mtu4_t::TBTM

unsigned short st_mtu4_t::TCNT

union { ... } st_mtu4_t::TCR

union { ... } st_mtu4_t::TCR2

unsigned short st_mtu4_t::TGRA

unsigned short st_mtu4_t::TGRB

unsigned short st_mtu4_t::TGRC

unsigned short st_mtu4_t::TGRD

unsigned short st_mtu4_t::TGRE

unsigned short st_mtu4_t::TGRF

union { ... } st_mtu4_t::TIER

union { ... } st_mtu4_t::TIORH

union { ... } st_mtu4_t::TIORL

union { ... } st_mtu4_t::TMDR1

union { ... } st_mtu4_t::TSR

char st_mtu4_t::wk0[1]

char st_mtu4_t::wk1[1]

char st_mtu4_t::wk10[2]

char st_mtu4_t::wk11[1]

char st_mtu4_t::wk12[38]

char st_mtu4_t::wk13[28]

char st_mtu4_t::wk2[2]

char st_mtu4_t::wk3[1]

char st_mtu4_t::wk4[8]

char st_mtu4_t::wk5[8]


char st_mtu4_t::wk6[8]

```
char st_mtu4_t::wk7[1]
```

```
char st_mtu4_t::wk8[11]
```

```
char st_mtu4_t::wk9[6]
```

```
#include <iodef.h>
```

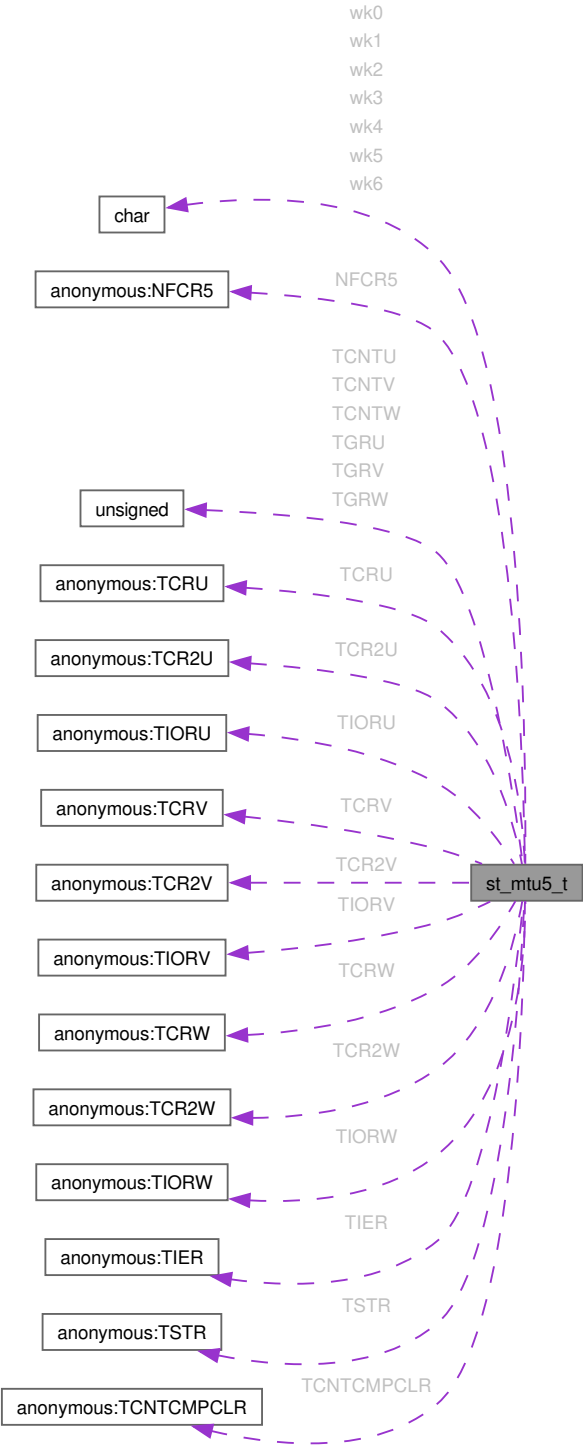

union { ... } st_mtu5_t::NFCR5

union { ... } st_mtu5_t::TCNTCMPCLR

unsigned short st_mtu5_t::TCNTU

unsigned short st_mtu5_t::TCNTV

unsigned short st_mtu5_t::TCNTW

union { ... } st_mtu5_t::TCR2U

union { ... } st_mtu5_t::TCR2V

union { ... } st_mtu5_t::TCR2W

union { ... } st_mtu5_t::TCRU

union { ... } st_mtu5_t::TCRV

union { ... } st_mtu5_t::TCRW

unsigned short st_mtu5_t::TGRU

unsigned short st_mtu5_t::TGRV

unsigned short st_mtu5_t::TGRW

union { ... } st_mtu5_t::TIER

```
union { ... } st_mtu5_t::TIORU
```

```
union { ... } st_mtu5_t::TIORV
```

```
union { ... } st_mtu5_t::TIORW
```

```
union { ... } st_mtu5_t::TSTR
```

```
char st_mtu5_t::wk0[1]
```

```
char st_mtu5_t::wk1[490]
```

```
char st_mtu5_t::wk2[9]
```


```
char st_mtu5_t::wk3[9]
```

```
char st_mtu5_t::wk4[11]
```

```
char st_mtu5_t::wk5[1]
```

```
char st_mtu5_t::wk6[1]
```

```
#include <iodefine.h>
```

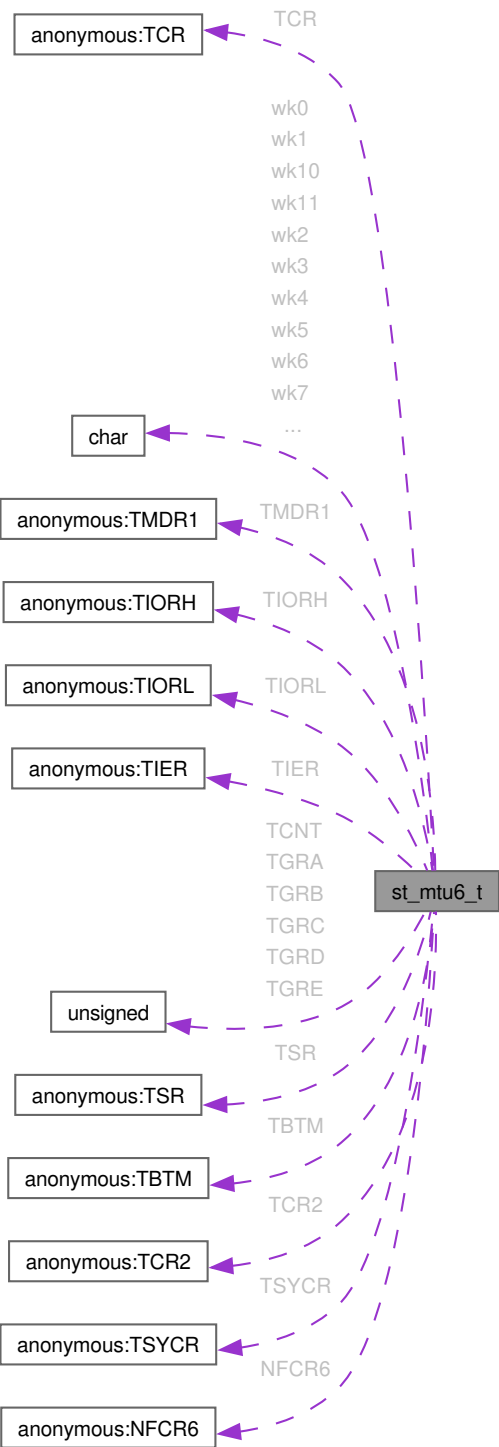

union { ... } st_mtu6_t::NFCR6

union { ... } st_mtu6_t::TBTM

unsigned short st_mtu6_t::TCNT

union { ... } st_mtu6_t::TCR

union { ... } st_mtu6_t::TCR2

unsigned short st_mtu6_t::TGRA

unsigned short st_mtu6_t::TGRB

unsigned short st_mtu6_t::TGRC

unsigned short st_mtu6_t::TGRD

unsigned short st_mtu6_t::TGRE

union { ... } st_mtu6_t::TIER

union { ... } st_mtu6_t::TIORH

union { ... } st_mtu6_t::TIORL

union { ... } st_mtu6_t::TMDR1

union { ... } st_mtu6_t::TSR

union { ... } st_mtu6_t::TSYCR

char st_mtu6_t::wk0[1]

char st_mtu6_t::wk1[1]

char st_mtu6_t::wk10[33]

char st_mtu6_t::wk11[31]

char st_mtu6_t::wk2[2]

char st_mtu6_t::wk3[7]

char st_mtu6_t::wk4[6]

char st_mtu6_t::wk5[8]


char st_mtu6_t::wk6[4]

char st_mtu6_t::wk7[11]

char st_mtu6_t::wk8[19]

char st_mtu6_t::wk9[3]

```
#include <iodefine.h>
```

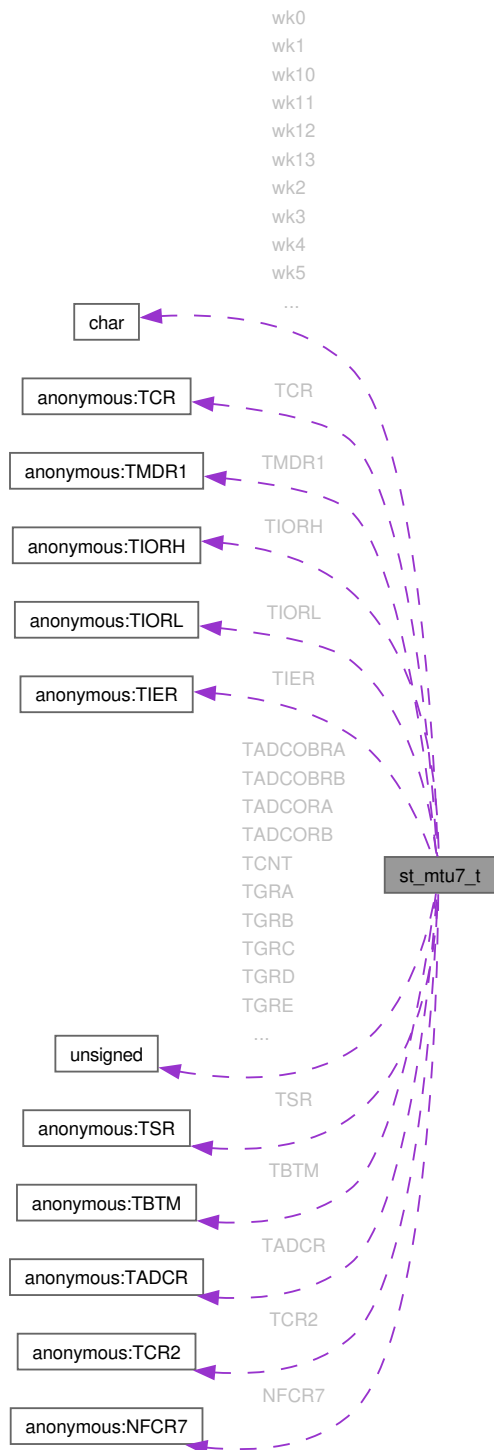

union { ... } st_mtu7_t::NFCR7

unsigned short st_mtu7_t::TADCOBRA

unsigned short st_mtu7_t::TADCOBRB

unsigned short st_mtu7_t::TADCORA

unsigned short st_mtu7_t::TADCORB

union { ... } st_mtu7_t::TADCR

union { ... } st_mtu7_t::TBTM

unsigned short st_mtu7_t::TCNT

union { ... } st_mtu7_t::TCR

union { ... } st_mtu7_t::TCR2

unsigned short st_mtu7_t::TGRA

unsigned short st_mtu7_t::TGRB

unsigned short st_mtu7_t::TGRC

unsigned short st_mtu7_t::TGRD

unsigned short st_mtu7_t::TGRE

unsigned short st_mtu7_t::TGRF

union { ... } st_mtu7_t::TIER

union { ... } st_mtu7_t::TIORH

union { ... } st_mtu7_t::TIORL

union { ... } st_mtu7_t::TMDR1

union { ... } st_mtu7_t::TSR

char st_mtu7_t::wk0[1]

char st_mtu7_t::wk1[1]

char st_mtu7_t::wk10[2]

char st_mtu7_t::wk11[1]

char st_mtu7_t::wk12[38]

char st_mtu7_t::wk13[28]

char st_mtu7_t::wk2[2]

char st_mtu7_t::wk3[1]

char st_mtu7_t::wk4[8]

char st_mtu7_t::wk5[8]


char st_mtu7_t::wk6[8]

```
char st_mtu7_t::wk7[1]
```

```
char st_mtu7_t::wk8[11]
```

```
char st_mtu7_t::wk9[6]
```

```
#include <iodef.h>
```

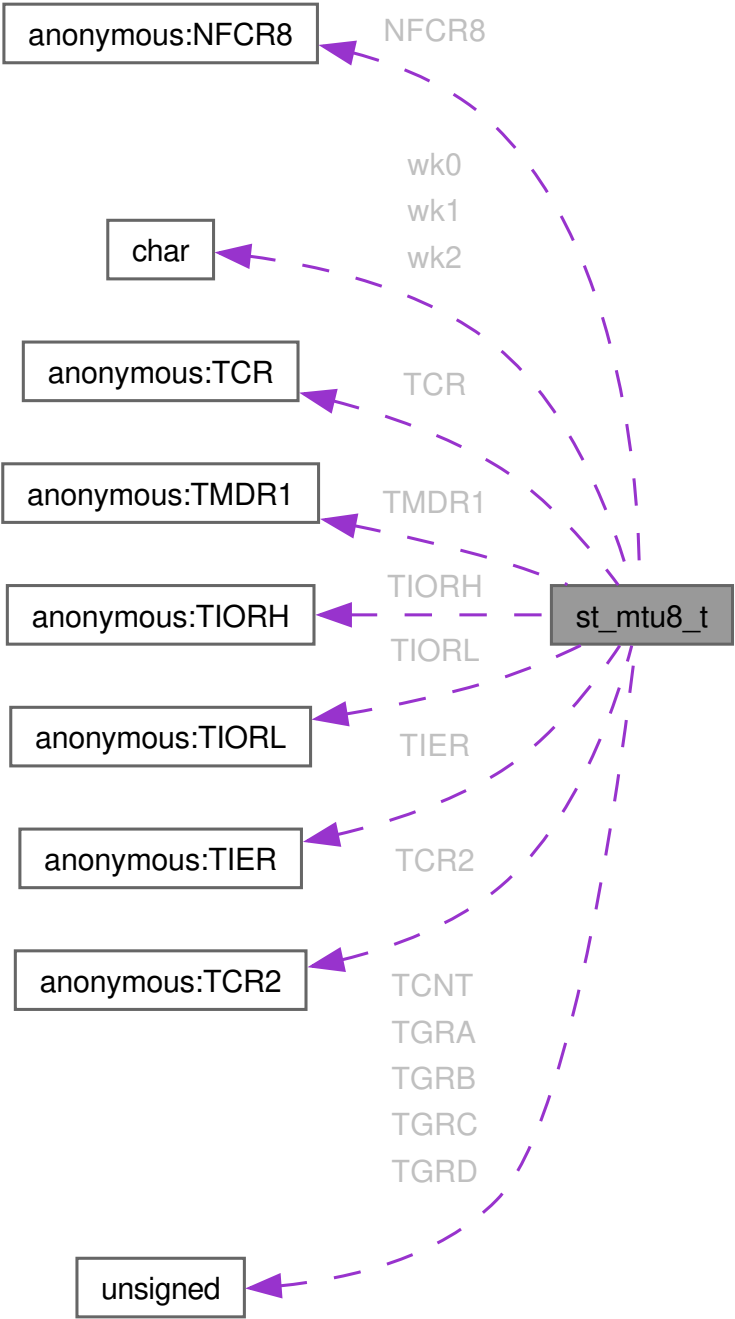

union { ... } st_mtu8_t::NFCR8

unsigned long st_mtu8_t::TCNT

union { ... } st_mtu8_t::TCR

union { ... } st_mtu8_t::TCR2

unsigned long st_mtu8_t::TGRA

unsigned long st_mtu8_t::TGRB

unsigned long st_mtu8_t::TGRC

unsigned long st_mtu8_t::TGRD

union { ... } st_mtu8_t::TIER

union { ... } st_mtu8_t::TIORH

union { ... } st_mtu8_t::TIORL


union { ... } st_mtu8_t::TMDR1

char st_mtu8_t::wk0[871]

char st_mtu8_t::wk1[1]

```
char st_mtu8_t::wk2[1]
```

```
#include <iodefine.h>
```

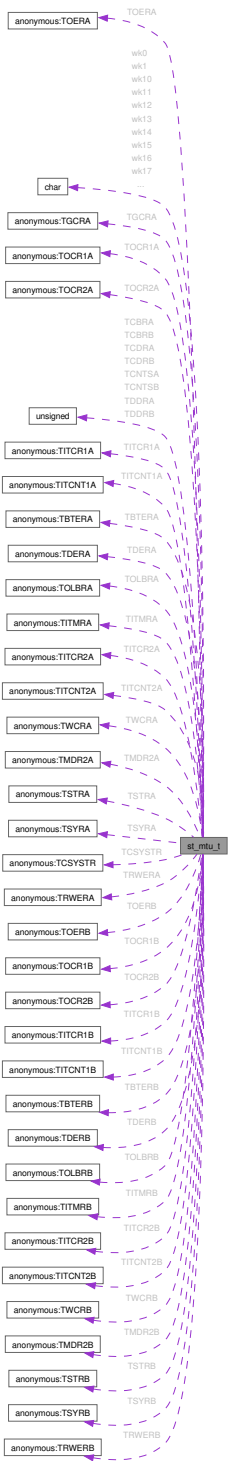

union { ... } st_mtu_t::TBTERA

union { ... } st_mtu_t::TBTERB

unsigned short st_mtu_t::TCBRA

unsigned short st_mtu_t::TCBRB

unsigned short st_mtu_t::TCDRA

unsigned short st_mtu_t::TCDRB

unsigned short st_mtu_t::TCNTSA

unsigned short st_mtu_t::TCNTSB

union { ... } st_mtu_t::TCSYSTR

unsigned short st_mtu_t::TDDRA

unsigned short st_mtu_t::TDDRB

union { ... } st_mtu_t::TDERA

union { ... } st_mtu_t::TDERB

union { ... } st_mtu_t::TGCRA

union { ... } st_mtu_t::TITCNT1A

union { ... } st_mtu_t::TITCNT1B

union { ... } st_mtu_t::TITCNT2A

union { ... } st_mtu_t::TITCNT2B

union { ... } st_mtu_t::TITCR1A

union { ... } st_mtu_t::TITCR1B

union { ... } st_mtu_t::TITCR2A

union { ... } st_mtu_t::TITCR2B

union { ... } st_mtu_t::TITMRA

union { ... } st_mtu_t::TITMRB

union { ... } st_mtu_t::TMDR2A

union { ... } st_mtu_t::TMDR2B

union { ... } st_mtu_t::TOCR1A

union { ... } st_mtu_t::TOCR1B

union { ... } st_mtu_t::TOCR2A

union { ... } st_mtu_t::TOCR2B

union { ... } st_mtu_t::TOERA

union { ... } st_mtu_t::TOERB

union { ... } st_mtu_t::TOLBRA

union { ... } st_mtu_t::TOLBRB

union { ... } st_mtu_t::TRWERA

union { ... } st_mtu_t::TRWERB

union { ... } st_mtu_t::TSTRA

union { ... } st_mtu_t::TSTRB

union { ... } st_mtu_t::TSYRA

union { ... } st_mtu_t::TSYRB

union { ... } st_mtu_t::TWCRA

union { ... } st_mtu_t::TWCRB

char st_mtu_t::wk0[2]

char st_mtu_t::wk1[4]

char st_mtu_t::wk10[1]

char st_mtu_t::wk11[1925]

char st_mtu_t::wk12[3]

char st_mtu_t::wk13[4]

char st_mtu_t::wk14[8]

char st_mtu_t::wk15[12]

char st_mtu_t::wk16[1]

char st_mtu_t::wk17[1]

char st_mtu_t::wk18[3]

char st_mtu_t::wk19[35]

char st_mtu_t::wk2[8]

char st_mtu_t::wk20[15]

char st_mtu_t::wk21[15]

char st_mtu_t::wk22[2]

char st_mtu_t::wk3[12]

char st_mtu_t::wk4[1]

char st_mtu_t::wk5[1]


char st_mtu_t::wk6[3]

char st_mtu_t::wk7[35]

char st_mtu_t::wk8[15]

char st_mtu_t::wk9[15]

```
#include <iodefne.h>
```

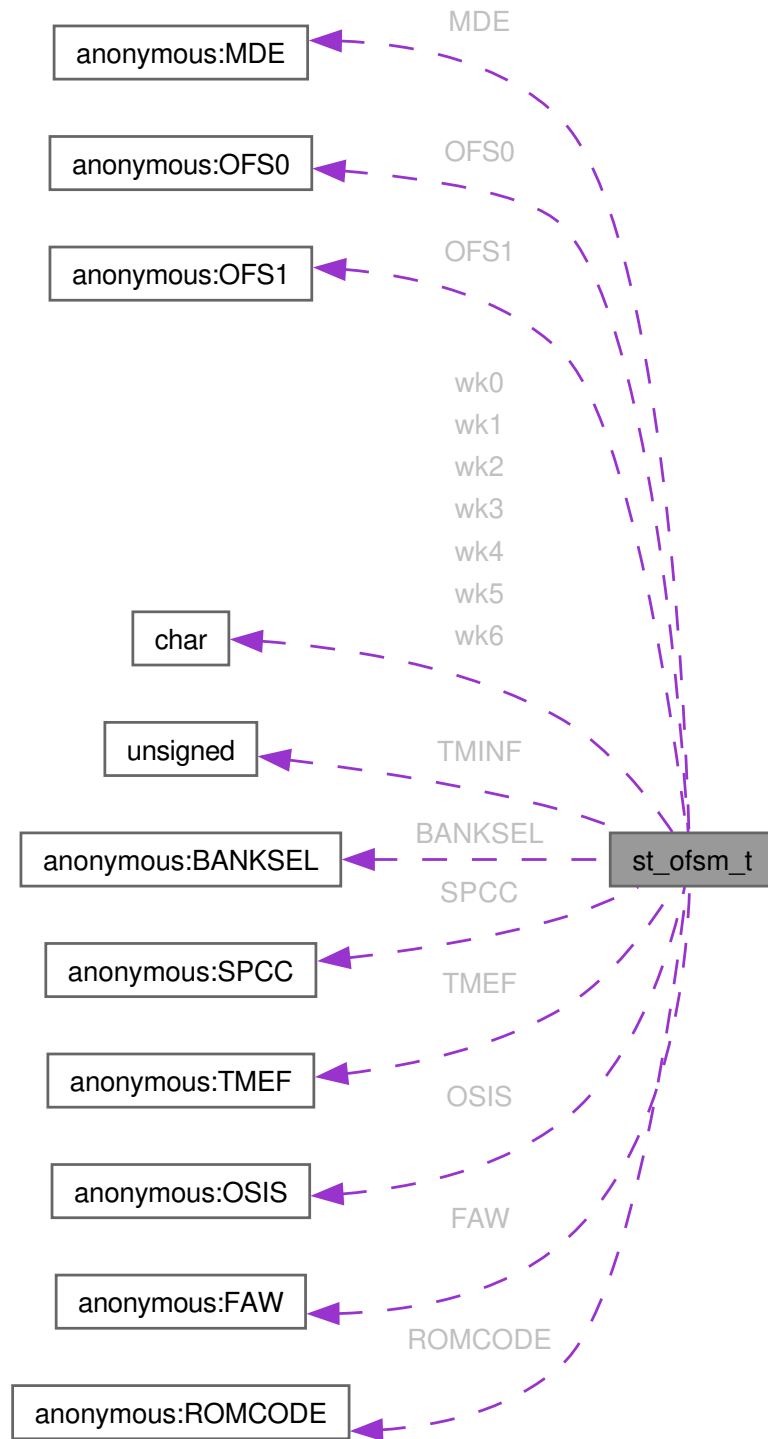

union { ... } st_ofsm_t::BANKSEL

union { ... } st_ofsm_t::FAW

union { ... } st_ofsm_t::MDE

union { ... } st_ofsm_t::OFS0

union { ... } st_ofsm_t::OFS1

union { ... } st_ofsm_t::OSIS

union { ... } st_ofsm_t::ROMCODE

union { ... } st_ofsm_t::SPCC

union { ... } st_ofsm_t::TMEF

unsigned long st_ofsm_t::TMINF

char st_ofsm_t::wk0[4]

char st_ofsm_t::wk1[12]

char st_ofsm_t::wk2[28]


char st_ofsm_t::wk3[4]

char st_ofsm_t::wk4[4]

char st_ofsm_t::wk5[4]

char st_ofsm_t::wk6[8]

```
#include <iodef.h>
```

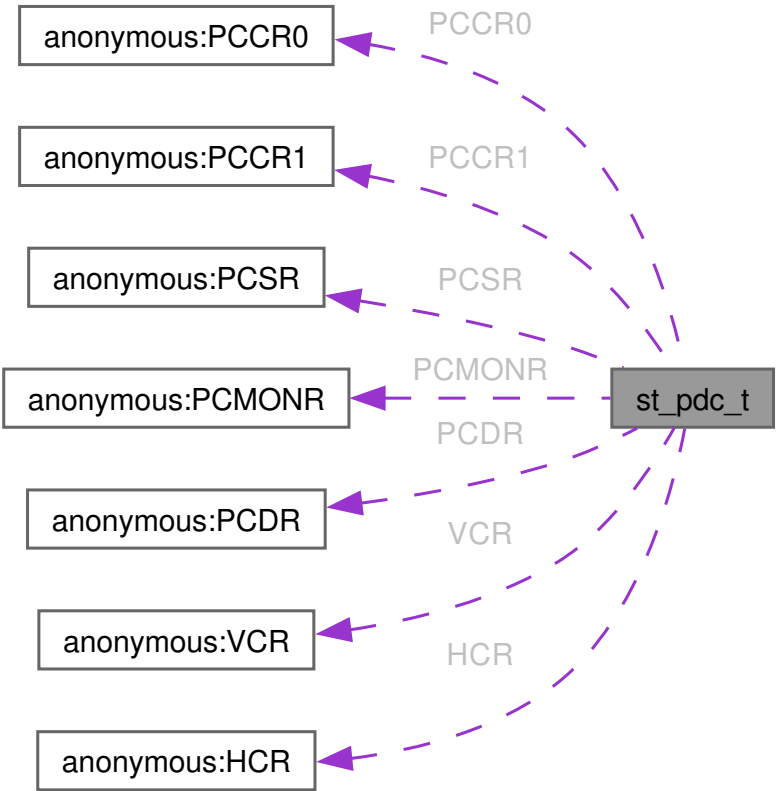

union { ... } st_pdc_t::HCR

union { ... } st_pdc_t::PCCR0

union { ... } st_pdc_t::PCCR1


union { ... } st_pdc_t::PCDR

union { ... } st_pdc_t::PCMONR

union { ... } st_pdc_t::PCSR

union { ... } st_pdc_t::VCR


```
#include <iodef.h>
```

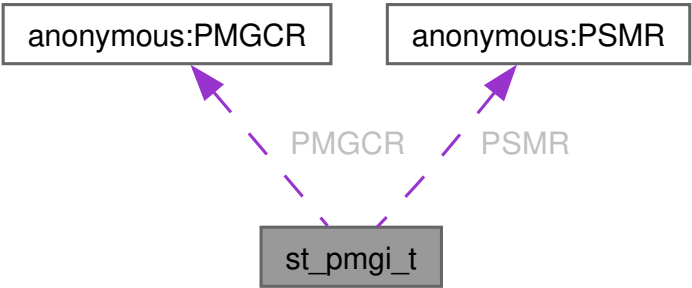

```
union { ... } st_pmg_t::PMGCR
```

```
union { ... } st_pmg_i_t::PSMR
```

```
#include <iodef.h>
```

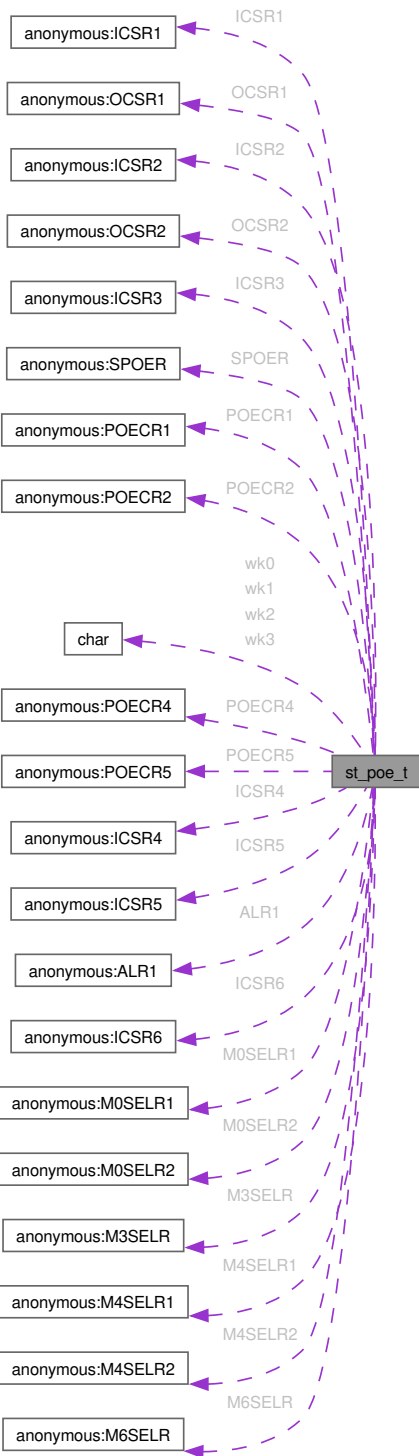

union { ... } st_poe_t::ALR1

union { ... } st_poe_t::ICSR1

union { ... } st_poe_t::ICSR2

union { ... } st_poe_t::ICSR3

union { ... } st_poe_t::ICSR4

union { ... } st_poe_t::ICSR5

union { ... } st_poe_t::ICSR6

union { ... } st_poe_t::M0SELR1

union { ... } st_poe_t::M0SELR2

union { ... } st_poe_t::M3SELR

union { ... } st_poe_t::M4SELR1

```
union { ... } st_poe_t::M4SELR2
```

```
union { ... } st_poe_t::M6SELR
```

```
union { ... } st_poe_t::OCSR1
```

```
union { ... } st_poe_t::OCSR2
```

```
union { ... } st_poe_t::POECR1
```

```
union { ... } st_poe_t::POECR2
```

```
union { ... } st_poe_t::POECR4
```

```
union { ... } st_poe_t::POECR5
```

```
union { ... } st_poe_t::SPOER
```


```
char st_poe_t::wk0[2]
```

```
char st_poe_t::wk1[2]
```

```
char st_poe_t::wk2[6]
```

```
char st_poe_t::wk3[1]
```

```
#include <iodefine.h>
```

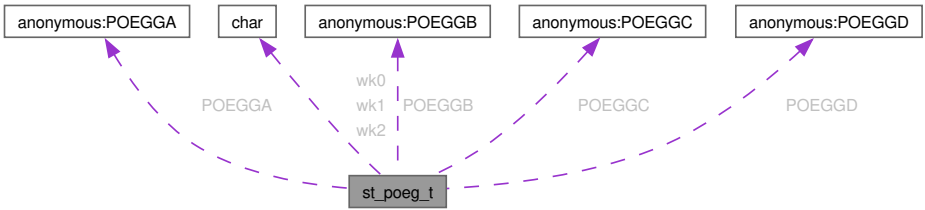

```
union { ... } st_poeg_t::POEGGA
```

```
union { ... } st_poeg_t::POEGGB
```

```
union { ... } st_poeg_t::POEGGC
```


```
union { ... } st_poeg_t::POEGGD
```

```
char st_poeg_t::wk0[252]
```

```
char st_poeg_t::wk1[252]
```

char st_poeg_t::wk2[252]

```
#include <iodef.h>
```

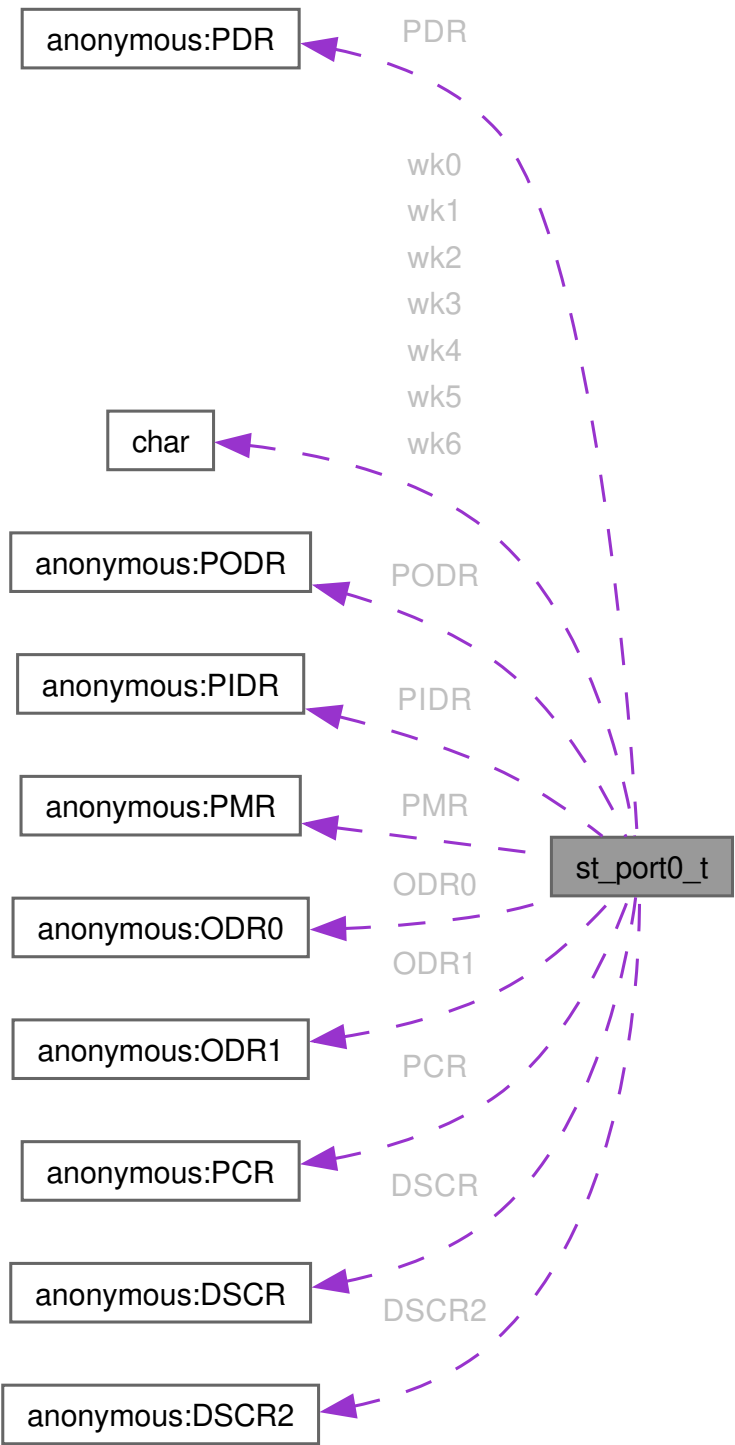

union { ... } st_port0_t::DSCR

union { ... } st_port0_t::DSCR2

union { ... } st_port0_t::ODR0

union { ... } st_port0_t::ODR1

union { ... } st_port0_t::PCR

union { ... } st_port0_t::PDR

union { ... } st_port0_t::PIDR

union { ... } st_port0_t::PMR

union { ... } st_port0_t::PODR

char st_port0_t::wk0[31]

char st_port0_t::wk1[31]

char st_port0_t::wk2[31]


char st_port0_t::wk3[31]

char st_port0_t::wk4[62]

char st_port0_t::wk5[31]

char st_port0_t::wk6[71]

```
#include <iodefne.h>
```

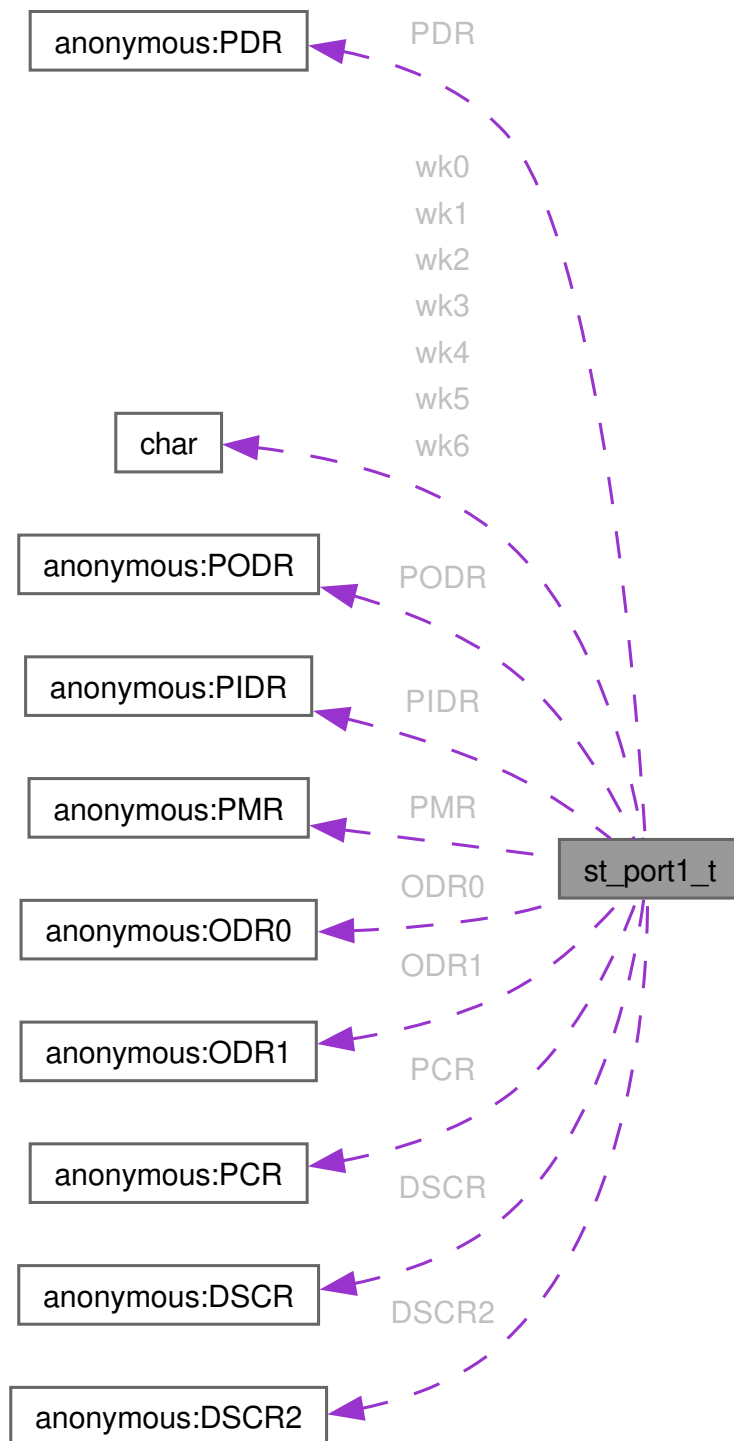

union { ... } st_port1_t::DSCR

union { ... } st_port1_t::DSCR2

union { ... } st_port1_t::ODR0

union { ... } st_port1_t::ODR1

union { ... } st_port1_t::PCR

union { ... } st_port1_t::PDR

union { ... } st_port1_t::PIDR

union { ... } st_port1_t::PMR

union { ... } st_port1_t::PODR

char st_port1_t::wk0[31]

char st_port1_t::wk1[31]

char st_port1_t::wk2[31]


char st_port1_t::wk3[32]

char st_port1_t::wk4[61]

char st_port1_t::wk5[31]

char st_port1_t::wk6[71]

```
#include <iodefine.h>
```

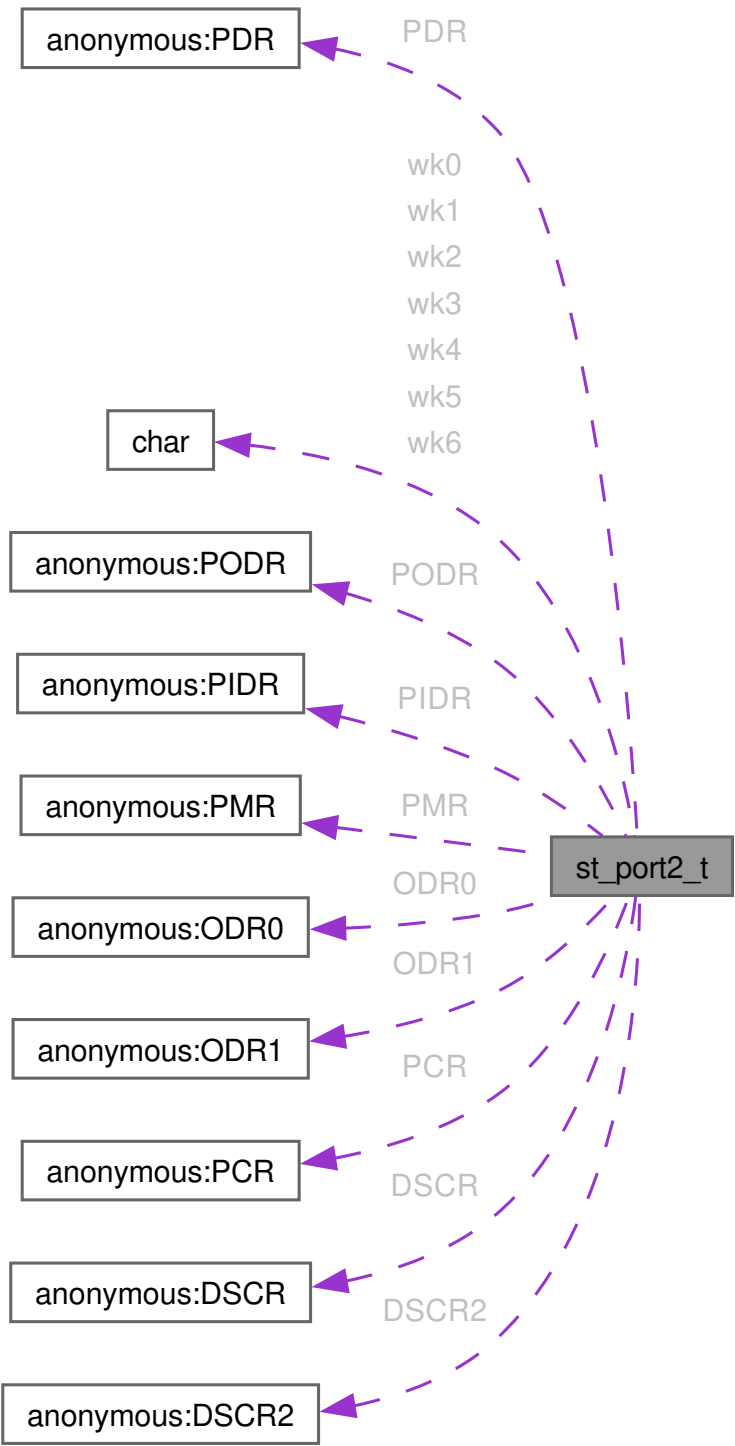

union { ... } st_port2_t::DSCR

union { ... } st_port2_t::DSCR2

union { ... } st_port2_t::ODR0

union { ... } st_port2_t::ODR1

union { ... } st_port2_t::PCR

union { ... } st_port2_t::PDR

union { ... } st_port2_t::PIDR

union { ... } st_port2_t::PMR

union { ... } st_port2_t::PODR

char st_port2_t::wk0[31]

char st_port2_t::wk1[31]

char st_port2_t::wk2[31]


char st_port2_t::wk3[33]

char st_port2_t::wk4[60]

char st_port2_t::wk5[31]

char st_port2_t::wk6[71]

```
#include <iodef.h>
```

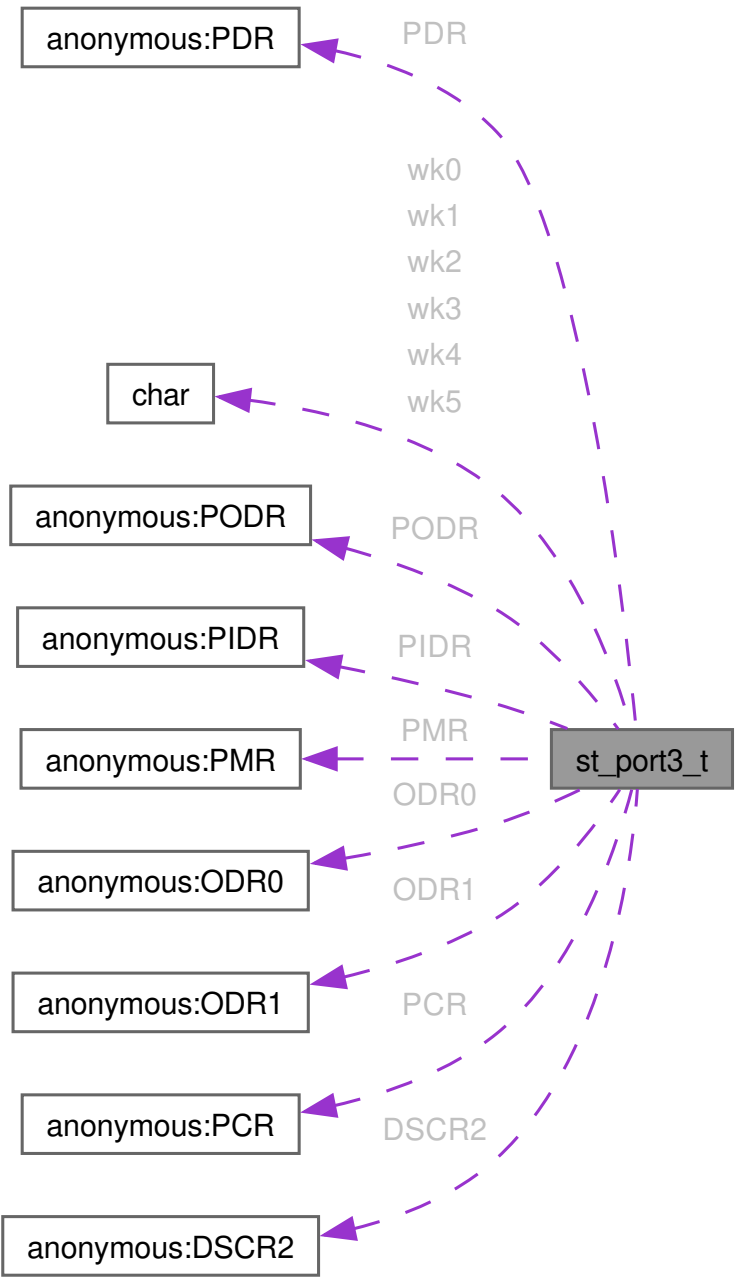

union { ... } st_port3_t::DSCR2

union { ... } st_port3_t::ODR0

union { ... } st_port3_t::ODR1

union { ... } st_port3_t::PCR

union { ... } st_port3_t::PDR

union { ... } st_port3_t::PIDR

union { ... } st_port3_t::PMR

```
union { ... } st_port3_t::PODR
```

```
char st_port3_t::wk0[31]
```

```
char st_port3_t::wk1[31]
```


```
char st_port3_t::wk2[31]
```

```
char st_port3_t::wk3[34]
```

```
char st_port3_t::wk4[59]
```

```
char st_port3_t::wk5[103]
```

```
#include <iodefne.h>
```

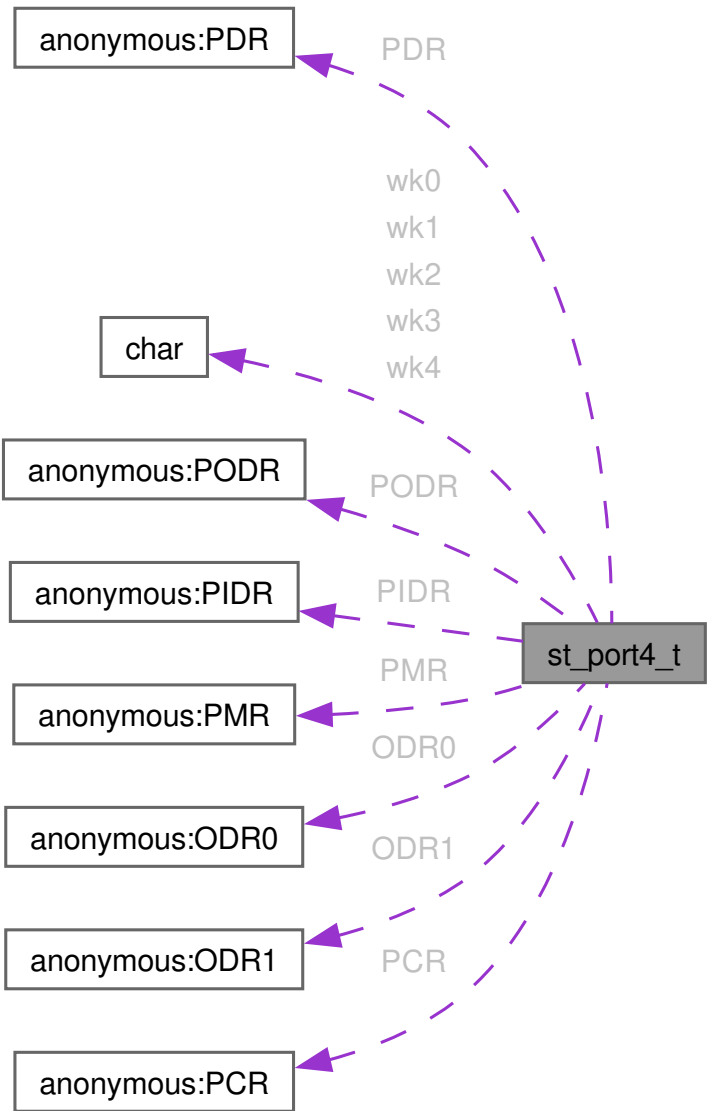

```
union { ... } st_port4_t::ODR0
```

```
union { ... } st_port4_t::ODR1
```

```
union { ... } st_port4_t::PCR
```

```
union { ... } st_port4_t::PDR
```

```
union { ... } st_port4_t::PIDR
```

```
union { ... } st_port4_t::PMR
```

```
union { ... } st_port4_t::PODR
```

```
char st_port4_t::wk0[31]
```


```
char st_port4_t::wk1[31]
```

```
char st_port4_t::wk2[31]
```

```
char st_port4_t::wk3[35]
```

```
char st_port4_t::wk4[58]
```

```
#include <iodefine.h>
```

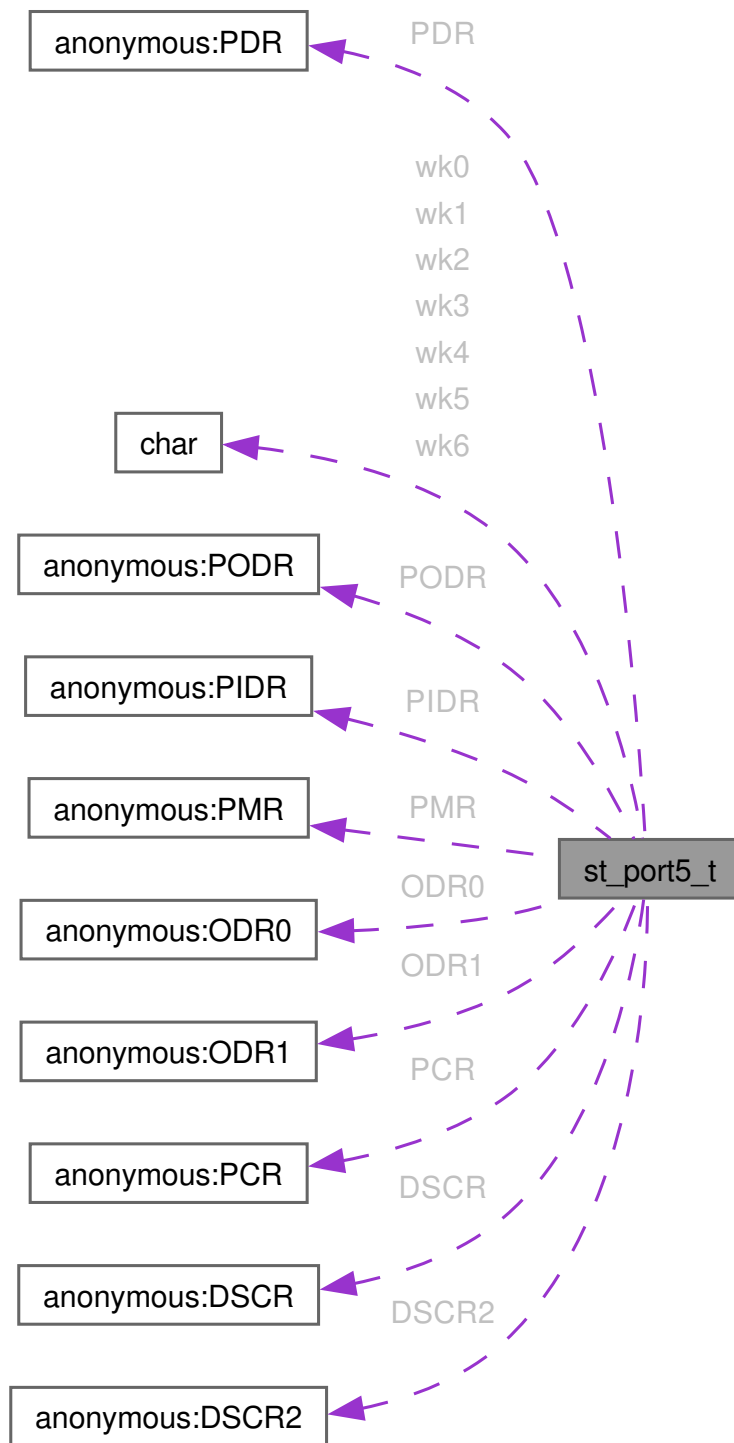

```
union { ... } st_port5_t::DSCR
union { ... } st_port5_t::DSCR2
union { ... } st_port5_t::ODR0
union { ... } st_port5_t::ODR1
union { ... } st_port5_t::PCR
union { ... } st_port5_t::PDR
union { ... } st_port5_t::PIDR
union { ... } st_port5_t::PMR
union { ... } st_port5_t::PODR

char st_port5_t::wk0[31]

char st_port5_t::wk1[31]

char st_port5_t::wk2[31]


char st_port5_t::wk3[36]

char st_port5_t::wk4[57]

char st_port5_t::wk5[31]

char st_port5_t::wk6[71]
```

```
#include <iodef.h>
```

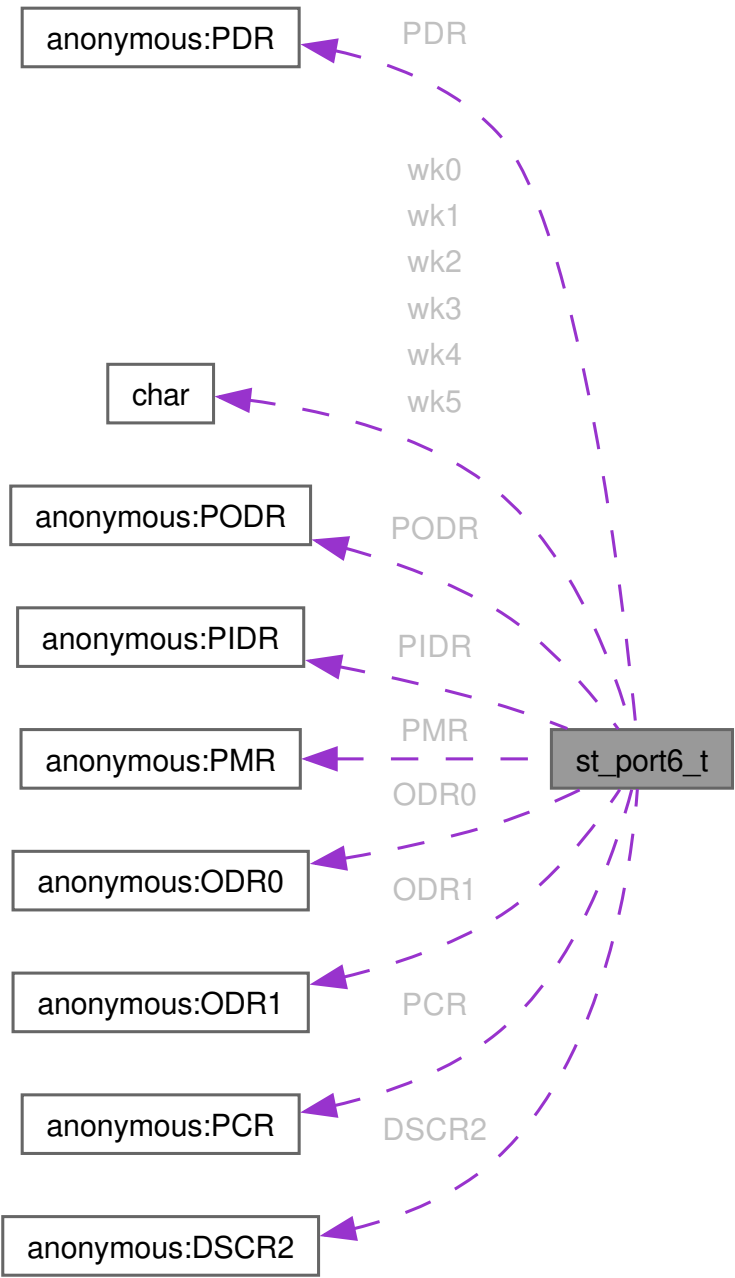

union { ... } st_port6_t::DSCR2

union { ... } st_port6_t::ODR0

union { ... } st_port6_t::ODR1

union { ... } st_port6_t::PCR

```
union { ... } st_port6_t::PDR
```

```
union { ... } st_port6_t::PIDR
```

```
union { ... } st_port6_t::PMR
```

```
union { ... } st_port6_t::PODR
```

```
char st_port6_t::wk0[31]
```

```
char st_port6_t::wk1[31]
```


```
char st_port6_t::wk2[31]
```

```
char st_port6_t::wk3[37]
```

```
char st_port6_t::wk4[56]
```

```
char st_port6_t::wk5[103]
```

```
#include <iodefine.h>
```

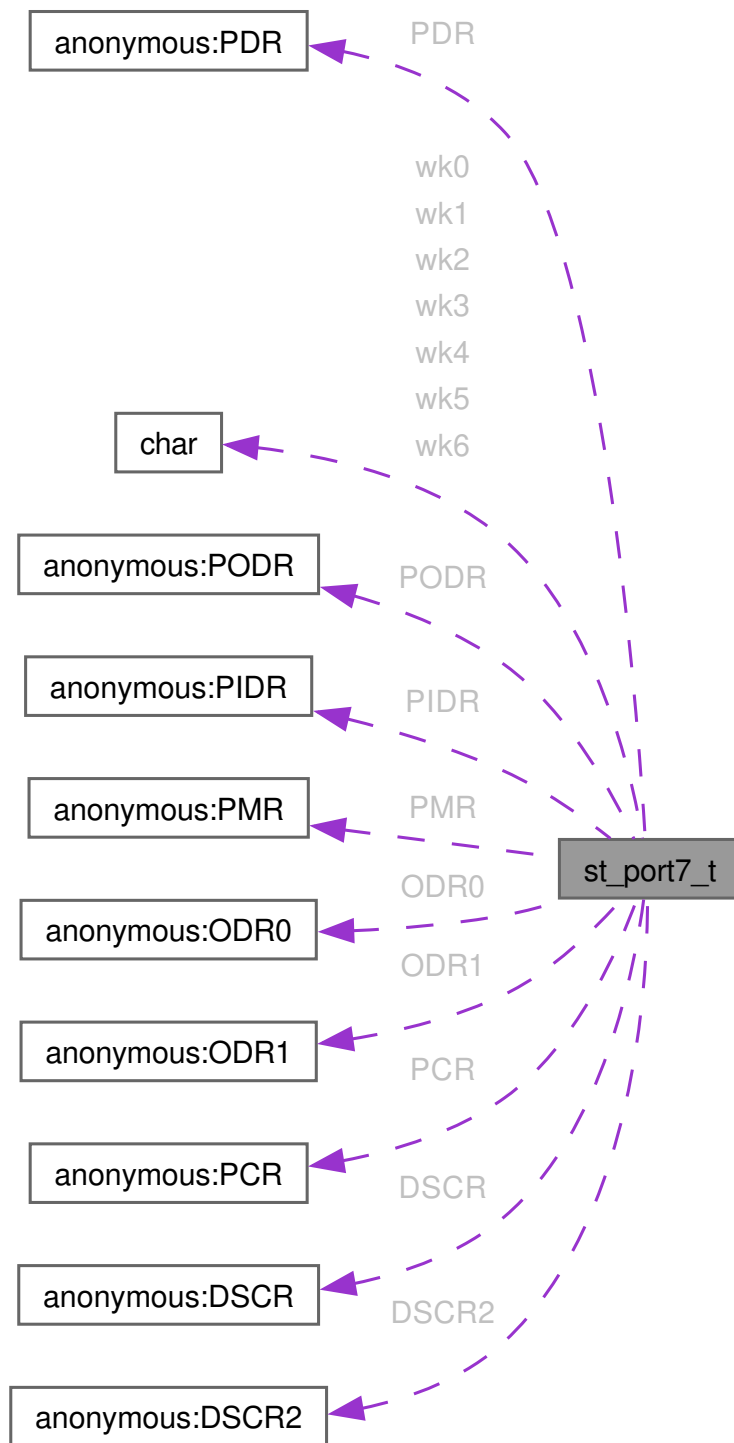

union { ... } st_port7_t::DSCR

union { ... } st_port7_t::DSCR2

union { ... } st_port7_t::ODR0

union { ... } st_port7_t::ODR1

union { ... } st_port7_t::PCR

union { ... } st_port7_t::PDR

union { ... } st_port7_t::PIDR

union { ... } st_port7_t::PMR

union { ... } st_port7_t::PODR

char st_port7_t::wk0[31]

char st_port7_t::wk1[31]

char st_port7_t::wk2[31]


char st_port7_t::wk3[38]

char st_port7_t::wk4[55]

char st_port7_t::wk5[31]

char st_port7_t::wk6[71]

```
#include <iodef.h>
```

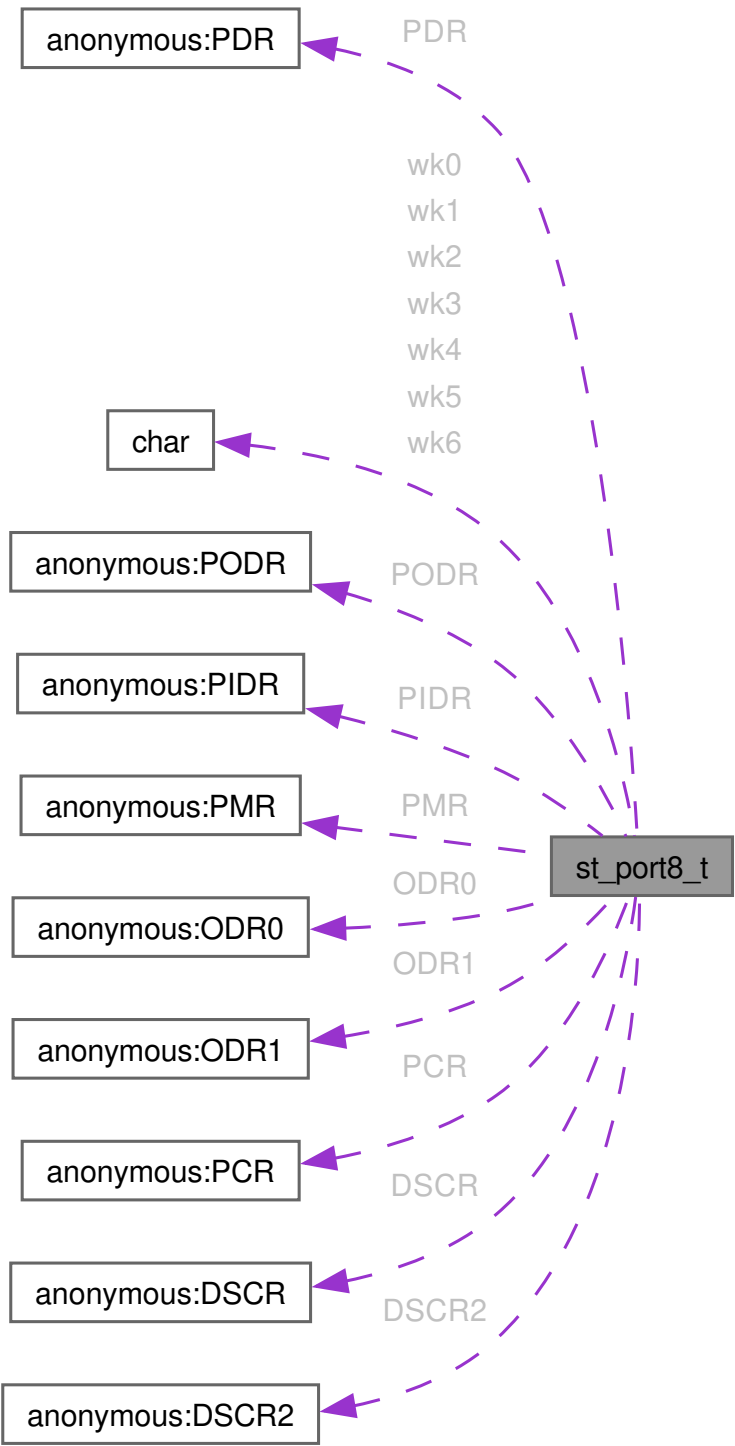

```
union { ... } st_port8_t::DSCR
union { ... } st_port8_t::DSCR2
union { ... } st_port8_t::ODR0
union { ... } st_port8_t::ODR1
union { ... } st_port8_t::PCR
union { ... } st_port8_t::PDR
union { ... } st_port8_t::PIDR
union { ... } st_port8_t::PMR
union { ... } st_port8_t::PODR
char st_port8_t::wk0[31]
```

```
char st_port8_t::wk1[31]
```

```
char st_port8_t::wk2[31]
```


```
char st_port8_t::wk3[39]
```

```
char st_port8_t::wk4[54]
```

```
char st_port8_t::wk5[31]
```

```
char st_port8_t::wk6[71]
```

```
#include <iodef.h>
```

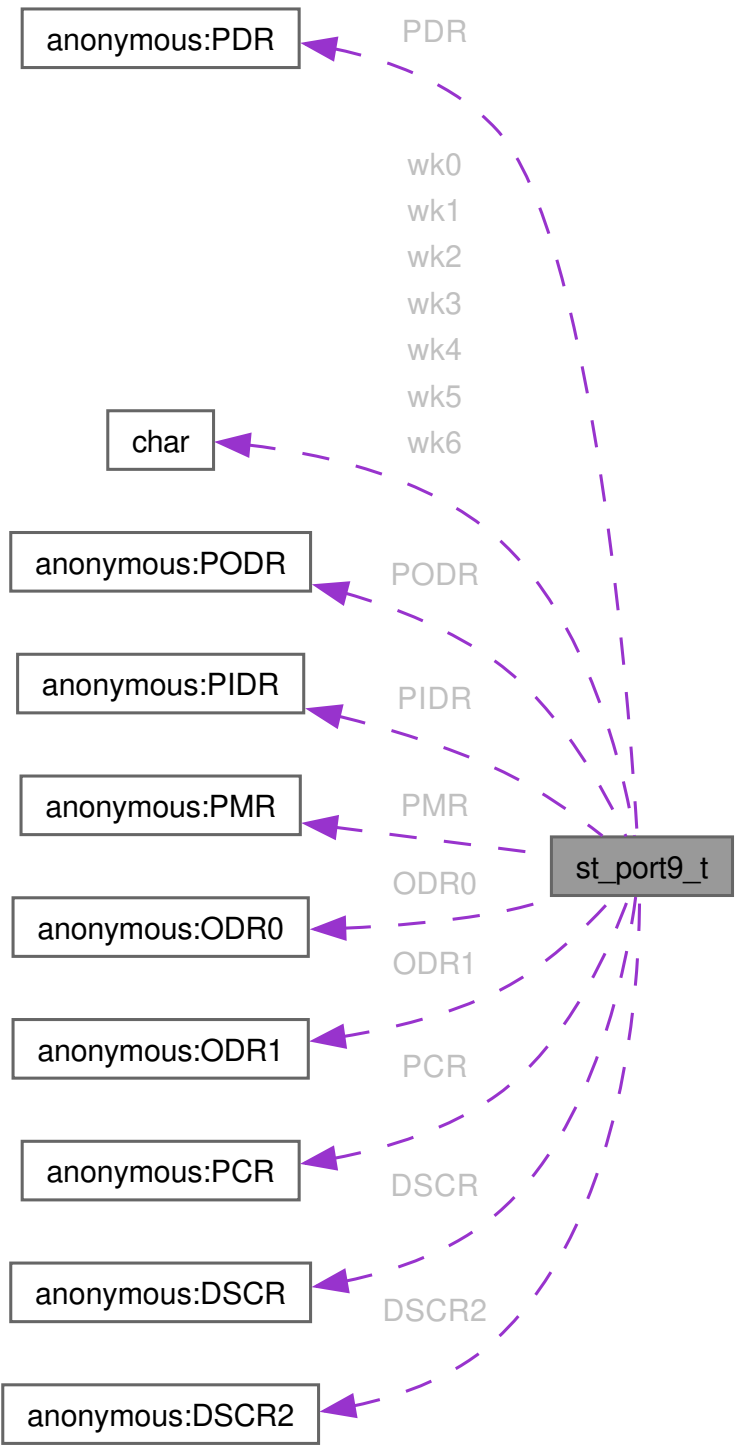

```
union { ... } st_port9_t::DSCR
```

```
union { ... } st_port9_t::DSCR2
```

```
union { ... } st_port9_t::ODR0
```

```
union { ... } st_port9_t::ODR1
```

```
union { ... } st_port9_t::PCR
```

```
union { ... } st_port9_t::PDR
```

```
union { ... } st_port9_t::PIDR
```

```
union { ... } st_port9_t::PMR
```

```
union { ... } st_port9_t::PODR
```

```
char st_port9_t::wk0[31]
```

```
char st_port9_t::wk1[31]
```

```
char st_port9_t::wk2[31]
```


```
char st_port9_t::wk3[40]
```

```
char st_port9_t::wk4[53]
```

```
char st_port9_t::wk5[31]
```

```
char st_port9_t::wk6[71]
```

```
#include <iodef.h>
```

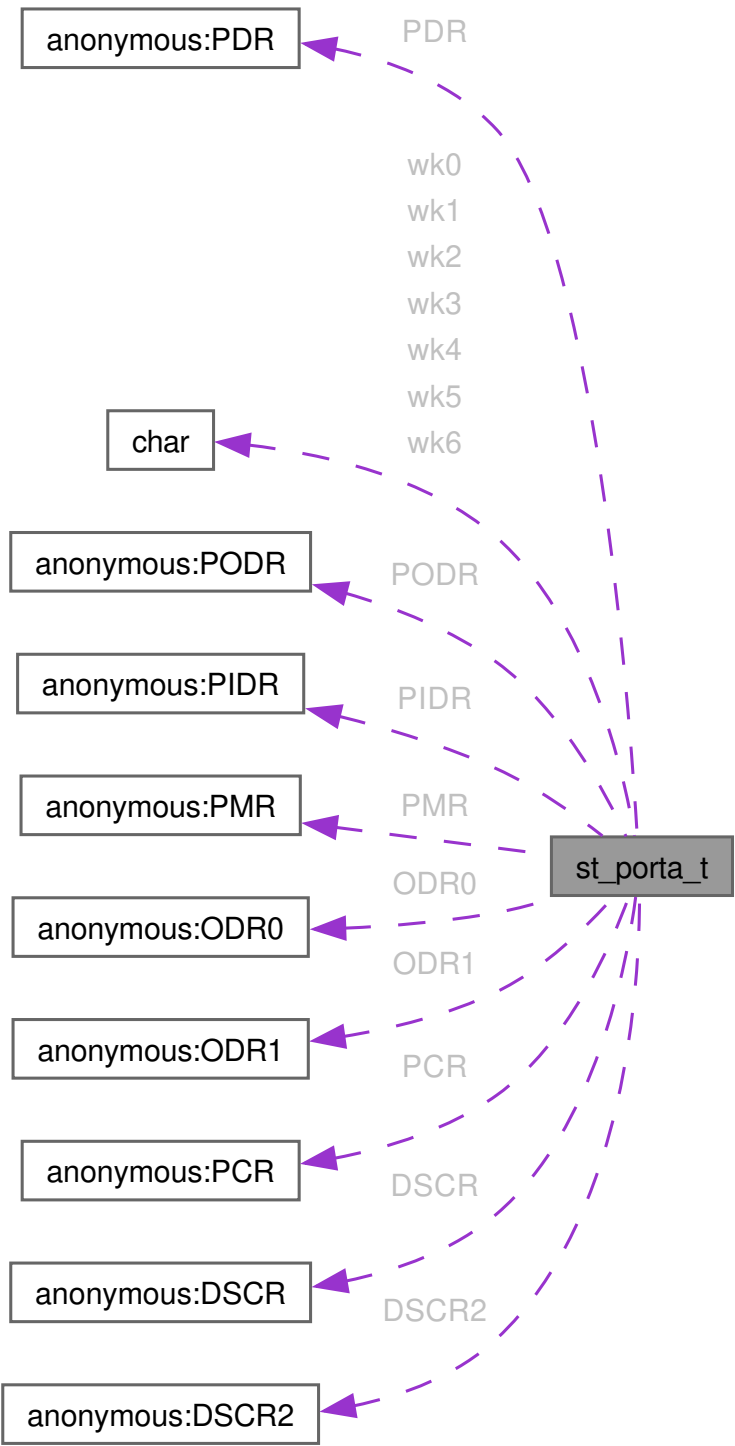

union { ... } st_porta_t::DSCR

union { ... } st_porta_t::DSCR2

union { ... } st_porta_t::ODR0

union { ... } st_porta_t::ODR1

union { ... } st_porta_t::PCR

union { ... } st_porta_t::PDR

union { ... } st_porta_t::PIDR

union { ... } st_porta_t::PMR

union { ... } st_porta_t::PODR

char st_porta_t::wk0[31]

char st_porta_t::wk1[31]

char st_porta_t::wk2[31]


char st_porta_t::wk3[41]

char st_porta_t::wk4[52]

char st_porta_t::wk5[31]

```
char st_porta_t::wk6[71]
```

```
#include <iodefine.h>
```

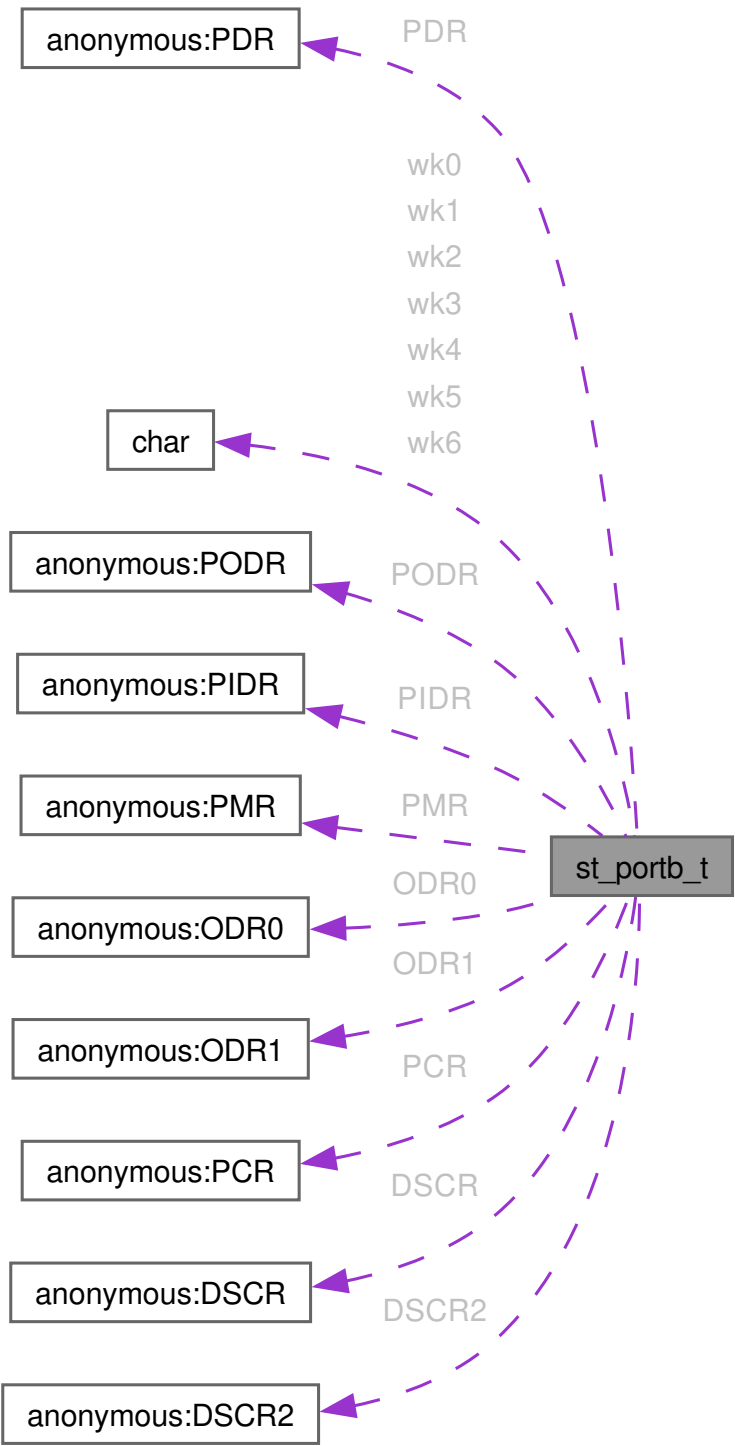

```
union { ... } st_portb_t::DSCR
```

```
union { ... } st_portb_t::DSCR2
```

```
union { ... } st_portb_t::ODR0
```

```
union { ... } st_portb_t::ODR1
```

```
union { ... } st_portb_t::PCR
```

```
union { ... } st_portb_t::PDR
```

```
union { ... } st_portb_t::PIDR
```

```
union { ... } st_portb_t::PMR
```

```
union { ... } st_portb_t::PODR
```

```
char st_portb_t::wk0[31]
```

```
char st_portb_t::wk1[31]
```

```
char st_portb_t::wk2[31]
```


```
char st_portb_t::wk3[42]
```

```
char st_portb_t::wk4[51]
```

```
char st_portb_t::wk5[31]
```

```
char st_portb_t::wk6[71]
```

```
#include <iodef.h>
```

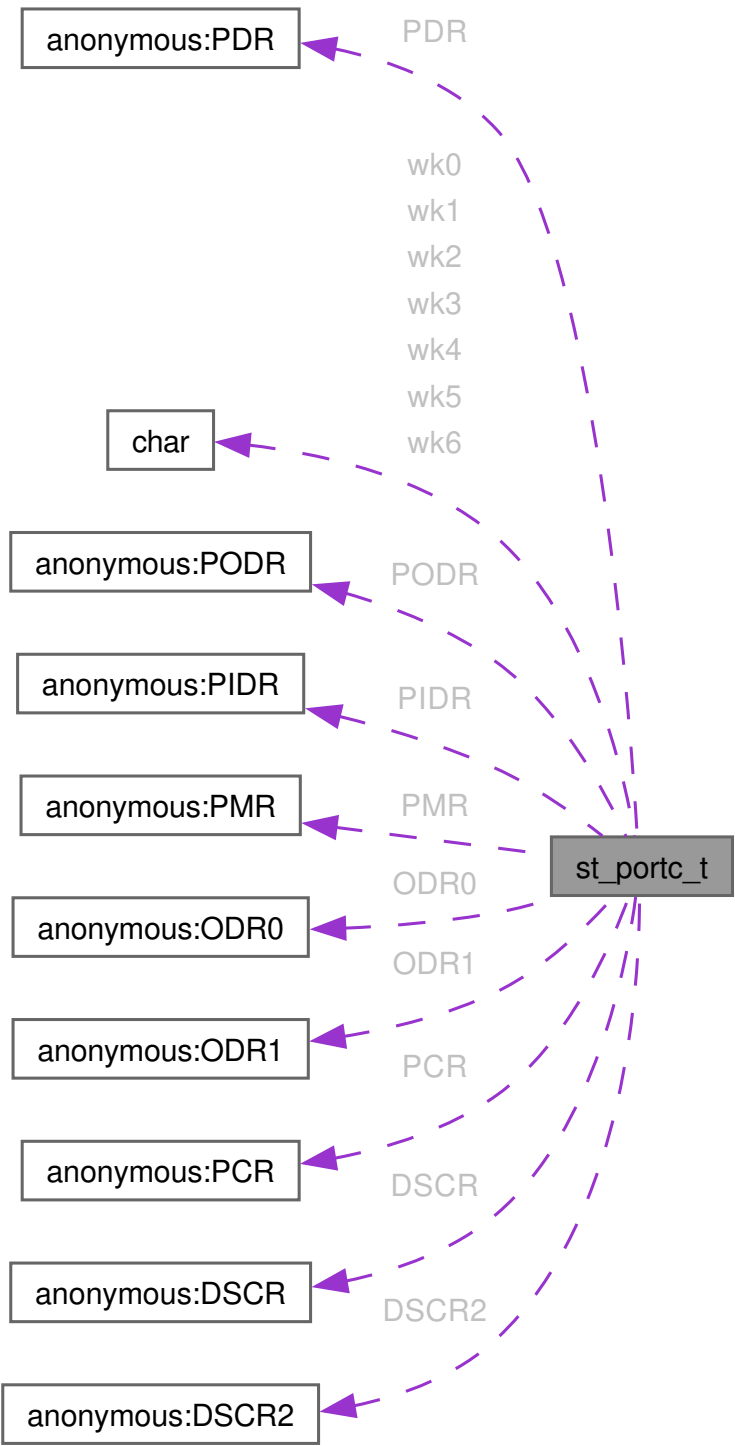

union { ... } st_portc_t::DSCR

union { ... } st_portc_t::DSCR2

union { ... } st_portc_t::ODR0

union { ... } st_portc_t::ODR1

union { ... } st_portc_t::PCR

union { ... } st_portc_t::PDR

union { ... } st_portc_t::PIDR

union { ... } st_portc_t::PMR

union { ... } st_portc_t::PODR

char st_portc_t::wk0[31]

char st_portc_t::wk1[31]

char st_portc_t::wk2[31]


char st_portc_t::wk3[43]

char st_portc_t::wk4[50]

char st_portc_t::wk5[31]

```
char st_portc_t::wk6[71]
```

```
#include <iodef.h>
```

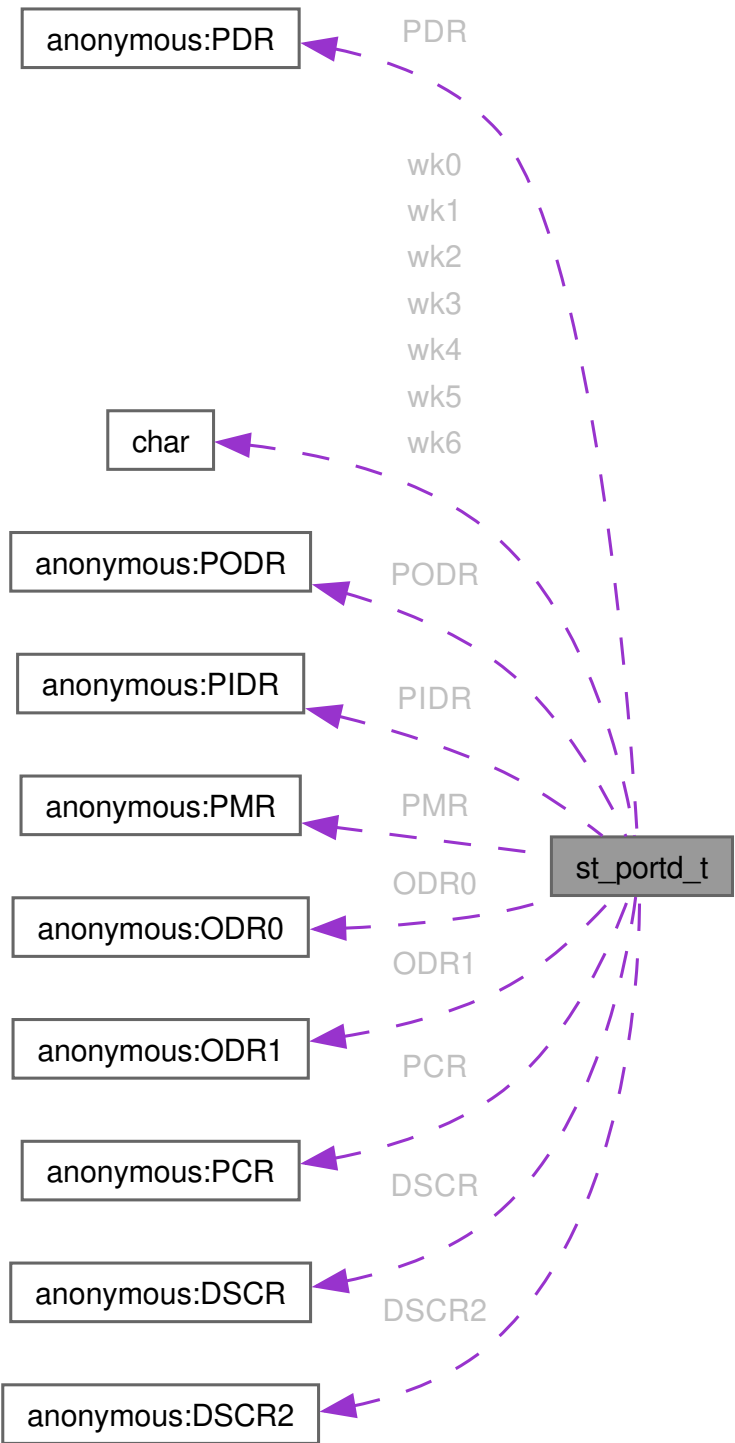

```
union { ... } st_portd_t::DSCR
union { ... } st_portd_t::DSCR2
union { ... } st_portd_t::ODR0
union { ... } st_portd_t::ODR1
union { ... } st_portd_t::PCR
union { ... } st_portd_t::PDR
union { ... } st_portd_t::PIDR
union { ... } st_portd_t::PMR
union { ... } st_portd_t::PODR
char st_portd_t::wk0[31]
```

```
char st_portd_t::wk1[31]
```

```
char st_portd_t::wk2[31]
```


```
char st_portd_t::wk3[44]
```

```
char st_portd_t::wk4[49]
```

```
char st_portd_t::wk5[31]
```

```
char st_portd_t::wk6[71]
```

```
#include <iodef.h>
```

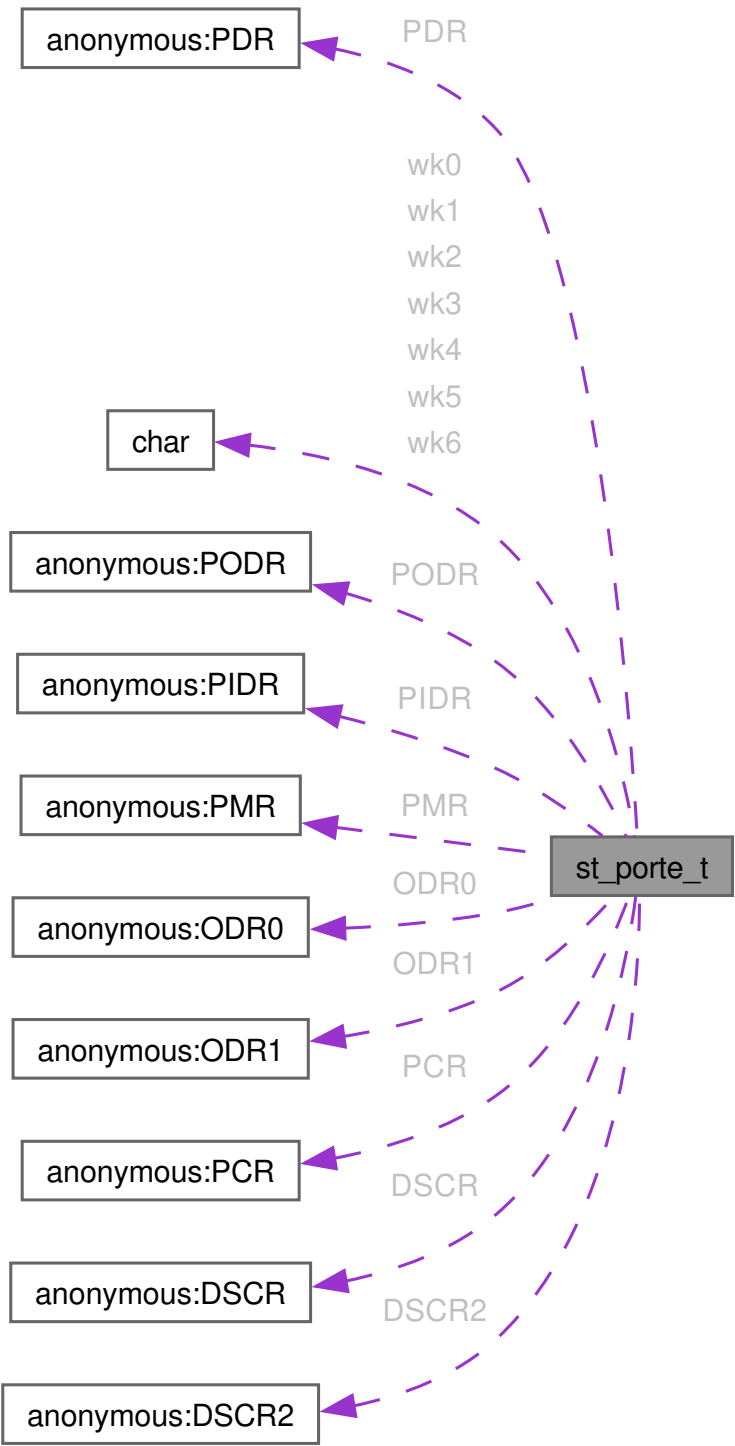

union { ... } st_porte_t::DSCR

union { ... } st_porte_t::DSCR2

union { ... } st_porte_t::ODR0

union { ... } st_porte_t::ODR1

union { ... } st_porte_t::PCR

union { ... } st_porte_t::PDR

union { ... } st_porte_t::PIDR

union { ... } st_porte_t::PMR

union { ... } st_porte_t::PODR

char st_porte_t::wk0[31]

char st_porte_t::wk1[31]

char st_porte_t::wk2[31]


char st_porte_t::wk3[45]

char st_porte_t::wk4[48]

char st_porte_t::wk5[31]

```
char st_porte_t::wk6[71]
```

```
#include <iodefine.h>
```

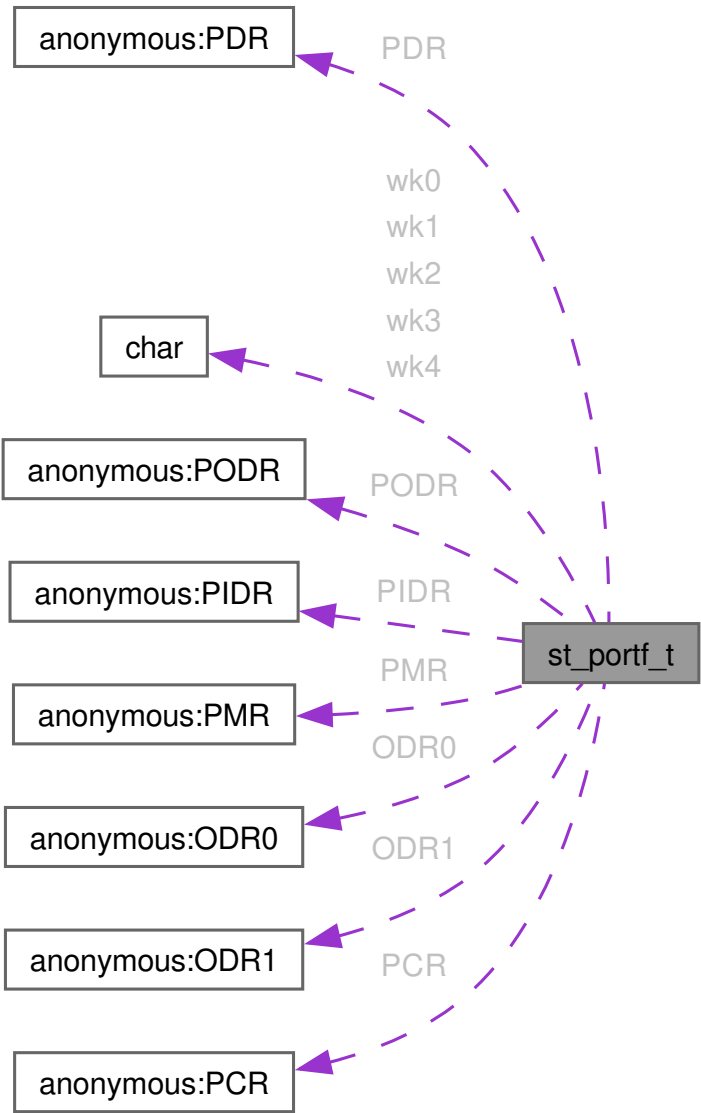

union { ... } st_portf_t::ODR0

union { ... } st_portf_t::ODR1

union { ... } st_portf_t::PCR

union { ... } st_portf_t::PDR

union { ... } st_portf_t::PIDR

union { ... } st_portf_t::PMR

union { ... } st_portf_t::PODR

char st_portf_t::wk0[31]


char st_portf_t::wk1[31]

char st_portf_t::wk2[31]

char st_portf_t::wk3[46]

char st_portf_t::wk4[47]

```
#include <iodef.h>
```

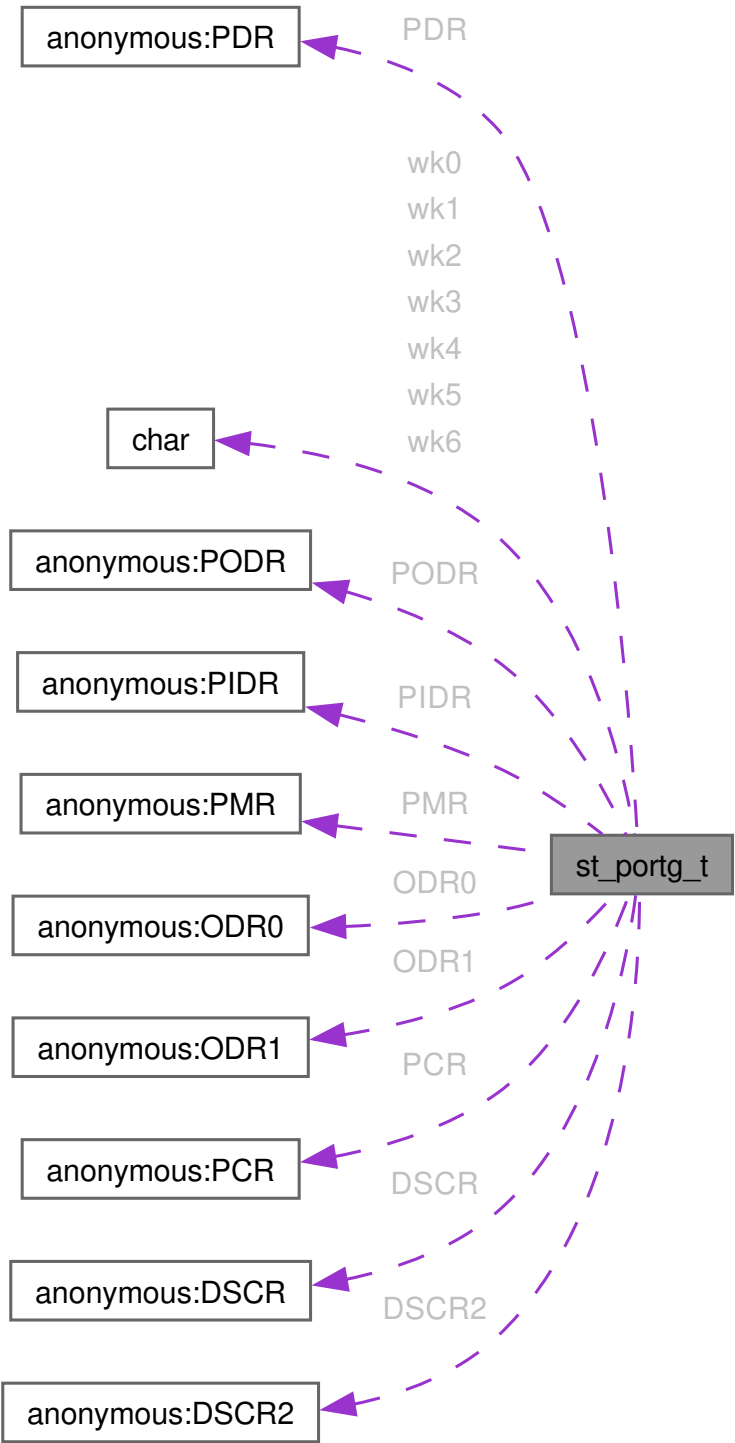

```
union { ... } st_portg_t::DSCR
union { ... } st_portg_t::DSCR2
union { ... } st_portg_t::ODR0
union { ... } st_portg_t::ODR1
union { ... } st_portg_t::PCR
union { ... } st_portg_t::PDR
union { ... } st_portg_t::PIDR
union { ... } st_portg_t::PMR
union { ... } st_portg_t::PODR
char st_portg_t::wk0[31]
```

```
char st_portg_t::wk1[31]
```

```
char st_portg_t::wk2[31]
```


```
char st_portg_t::wk3[47]
```

```
char st_portg_t::wk4[46]
```

```
char st_portg_t::wk5[31]
```

```
char st_portg_t::wk6[71]
```

```
#include <iodefine.h>
```

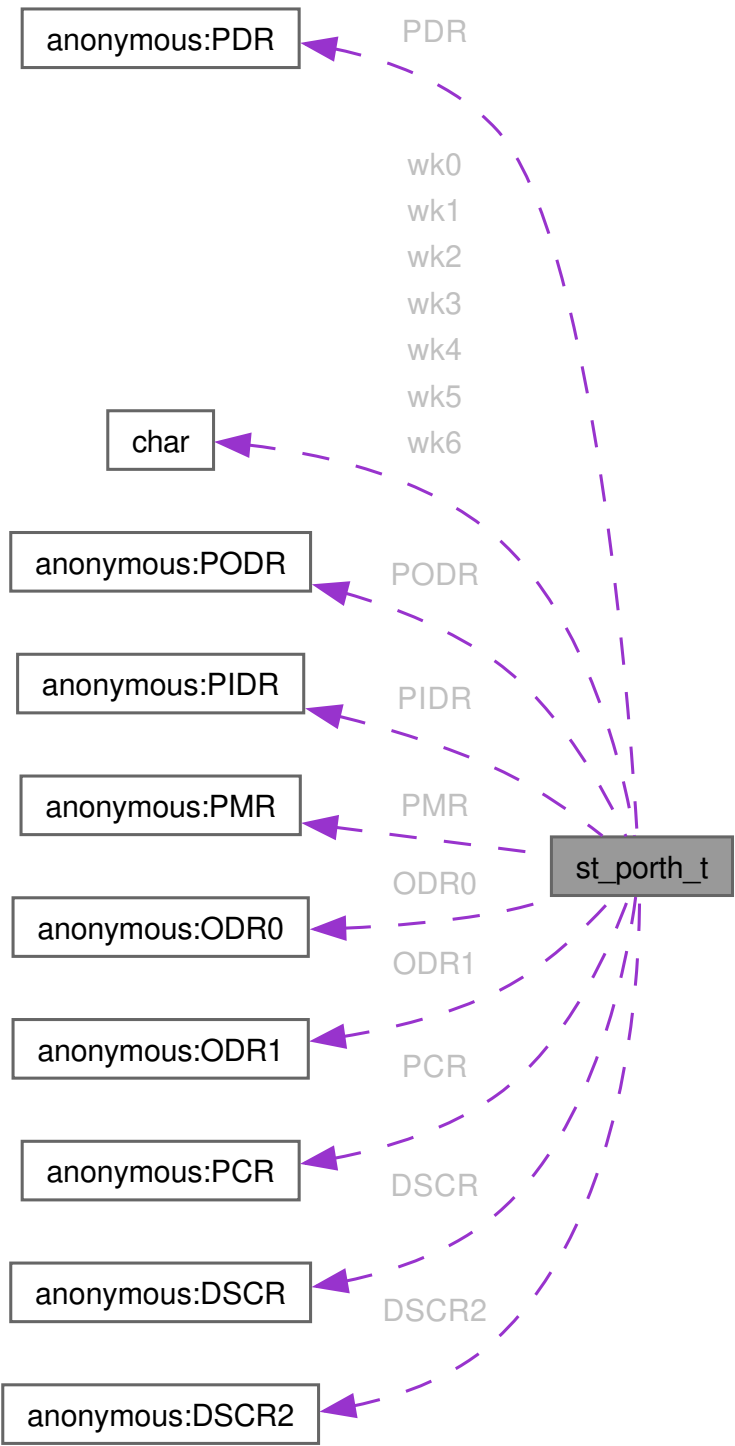

```
union { ... } st_porth_t::DSCR
union { ... } st_porth_t::DSCR2
union { ... } st_porth_t::ODR0
union { ... } st_porth_t::ODR1
union { ... } st_porth_t::PCR
union { ... } st_porth_t::PDR
union { ... } st_porth_t::PIDR
union { ... } st_porth_t::PMR
union { ... } st_porth_t::PODR
char st_porth_t::wk0[31]
```

```
char st_porth_t::wk1[31]
```

```
char st_porth_t::wk2[31]
```


```
char st_porth_t::wk3[48]
```

```
char st_porth_t::wk4[45]
```

```
char st_porth_t::wk5[31]
```

char st_porth_t::wk6[71]

```
#include <iodefine.h>
```

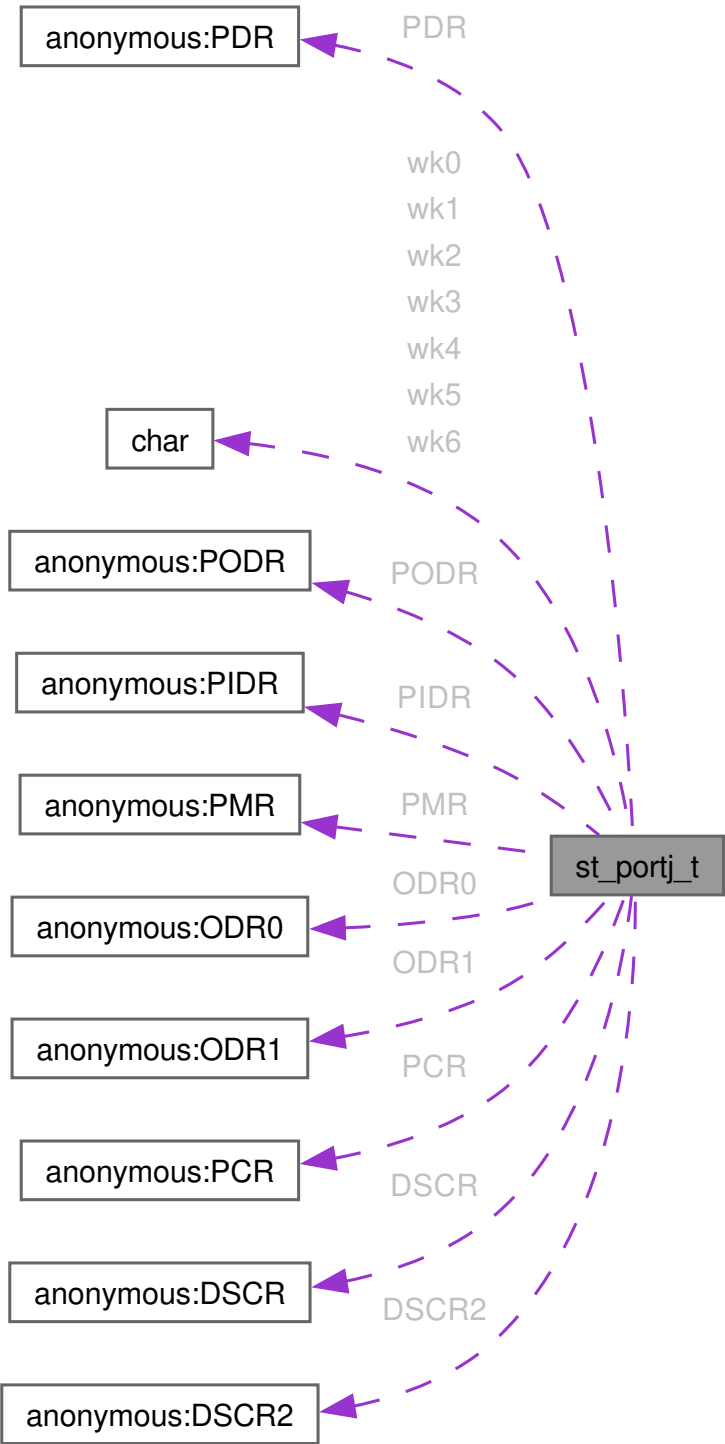

union { ... } st_portj_t::DSCR

union { ... } st_portj_t::DSCR2

union { ... } st_portj_t::ODR0

union { ... } st_portj_t::ODR1

```
union { ... } st_portj_t::PCR
```

```
union { ... } st_portj_t::PDR
```

```
union { ... } st_portj_t::PIDR
```

```
union { ... } st_portj_t::PMR
```

```
union { ... } st_portj_t::PODR
```

```
char st_portj_t::wk0[31]
```

```
char st_portj_t::wk1[31]
```

```
char st_portj_t::wk2[31]
```


```
char st_portj_t::wk3[49]
```

```
char st_portj_t::wk4[44]
```

```
char st_portj_t::wk5[31]
```

```
char st_portj_t::wk6[71]
```

```
#include <iodef.h>
```

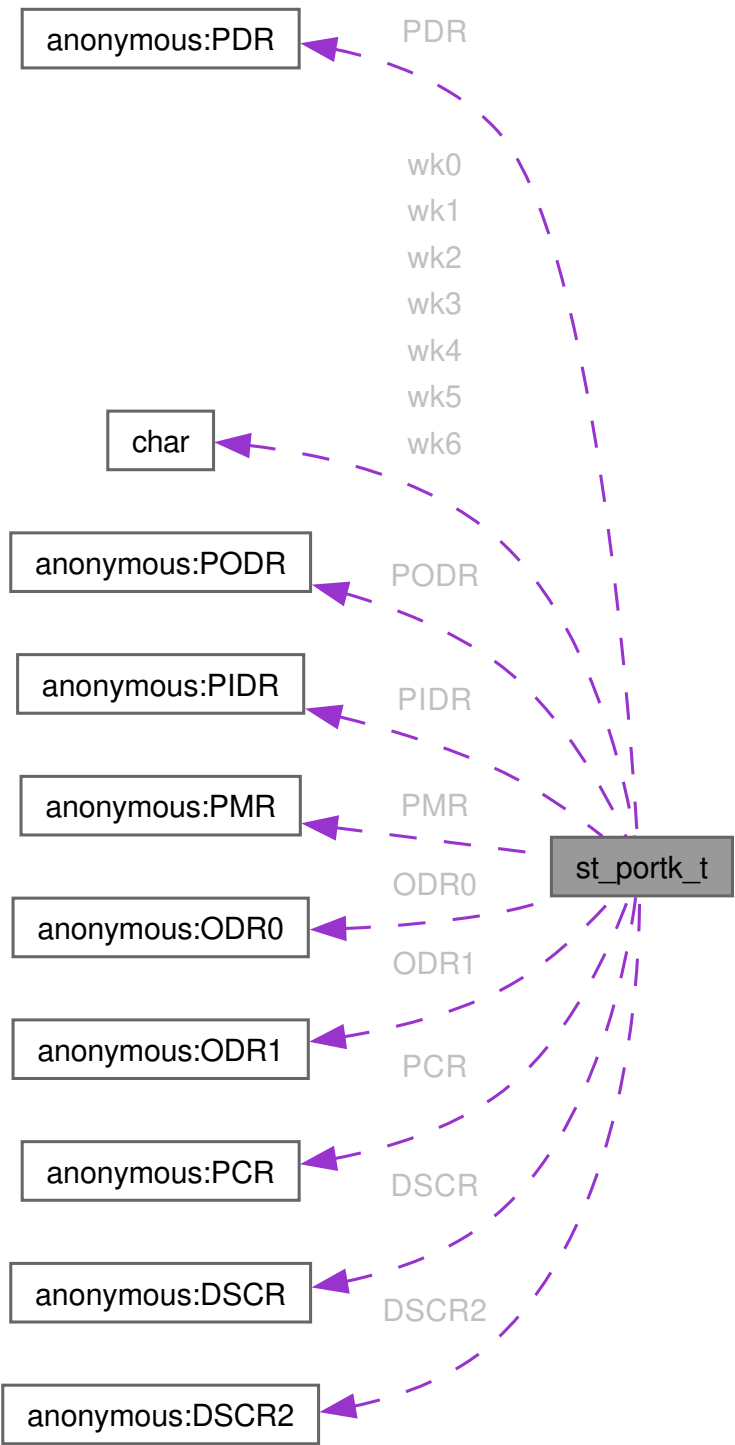

union { ... } st_portk_t::DSCR

union { ... } st_portk_t::DSCR2

union { ... } st_portk_t::ODR0

union { ... } st_portk_t::ODR1

union { ... } st_portk_t::PCR

union { ... } st_portk_t::PDR

union { ... } st_portk_t::PIDR

union { ... } st_portk_t::PMR

union { ... } st_portk_t::PODR

char st_portk_t::wk0[31]

char st_portk_t::wk1[31]

char st_portk_t::wk2[31]


char st_portk_t::wk3[50]

char st_portk_t::wk4[43]

```
char st_portk_t::wk5[31]
```

```
char st_portk_t::wk6[71]
```

```
#include <iodefine.h>
```

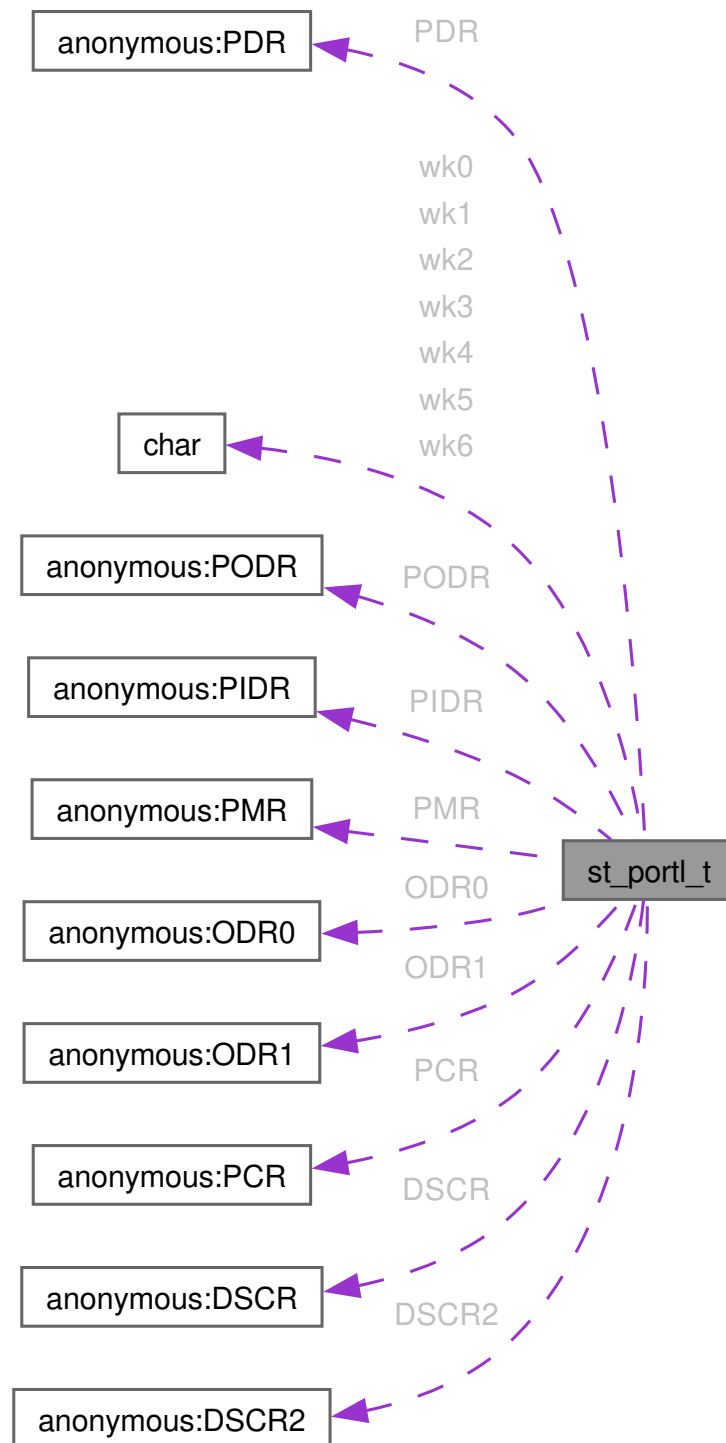

union { ... } st_portl_t::DSCR

union { ... } st_portl_t::DSCR2

union { ... } st_portl_t::ODR0

union { ... } st_portl_t::ODR1

union { ... } st_portl_t::PCR

union { ... } st_portl_t::PDR

union { ... } st_portl_t::PIDR

union { ... } st_portl_t::PMR

union { ... } st_portl_t::PODR

char st_portl_t::wk0[31]

char st_portl_t::wk1[31]

char st_portl_t::wk2[31]


char st_portl_t::wk3[51]

char st_portl_t::wk4[42]

char st_portl_t::wk5[31]

char st_portl_t::wk6[71]

```
#include <iodefine.h>
```

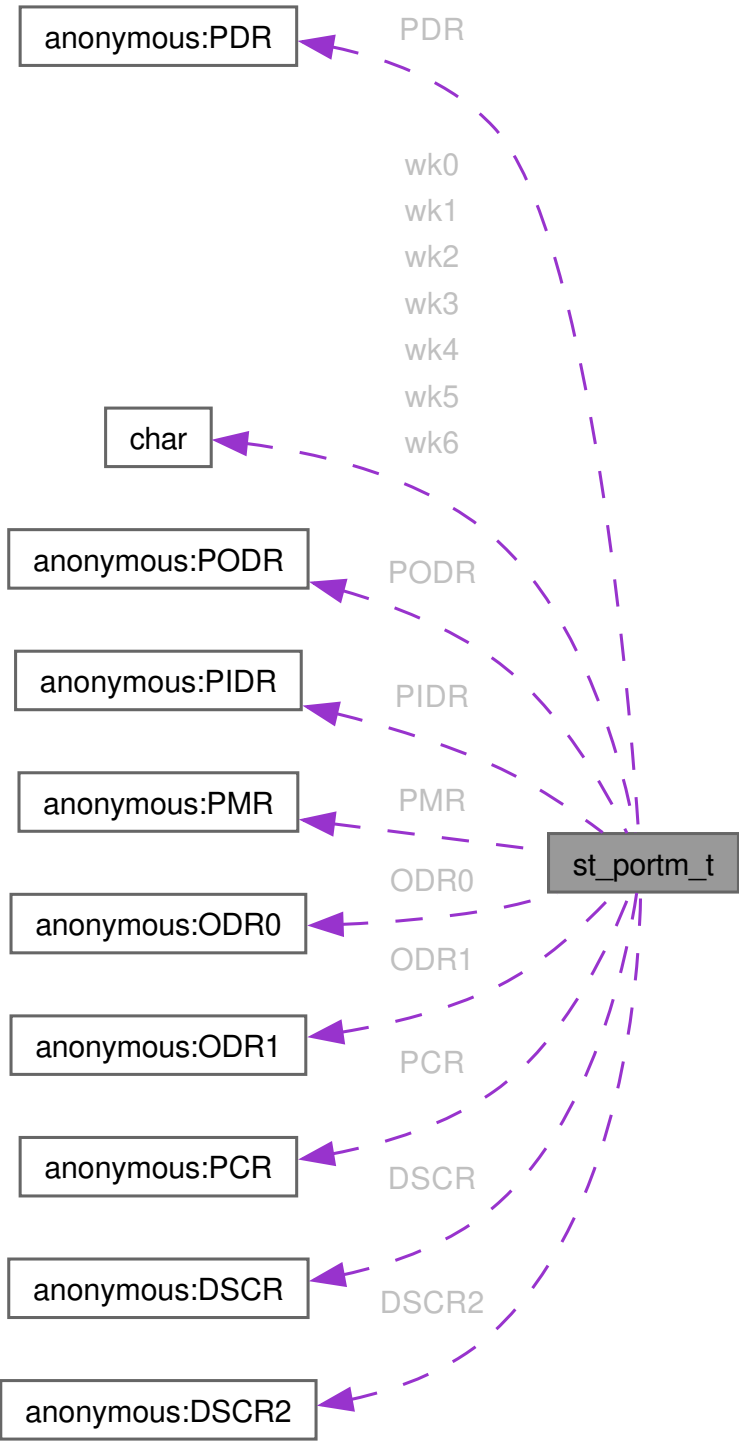

union { ... } st_portm_t::DSCR

union { ... } st_portm_t::DSCR2

union { ... } st_portm_t::ODR0

union { ... } st_portm_t::ODR1

union { ... } st_portm_t::PCR

union { ... } st_portm_t::PDR

union { ... } st_portm_t::PIDR

union { ... } st_portm_t::PMR

union { ... } st_portm_t::PODR

char st_portm_t::wk0[31]

char st_portm_t::wk1[31]

char st_portm_t::wk2[31]


char st_portm_t::wk3[52]

char st_portm_t::wk4[41]

char st_portm_t::wk5[31]

```
char st_portm_t::wk6[71]
```

```
#include <iodefine.h>
```

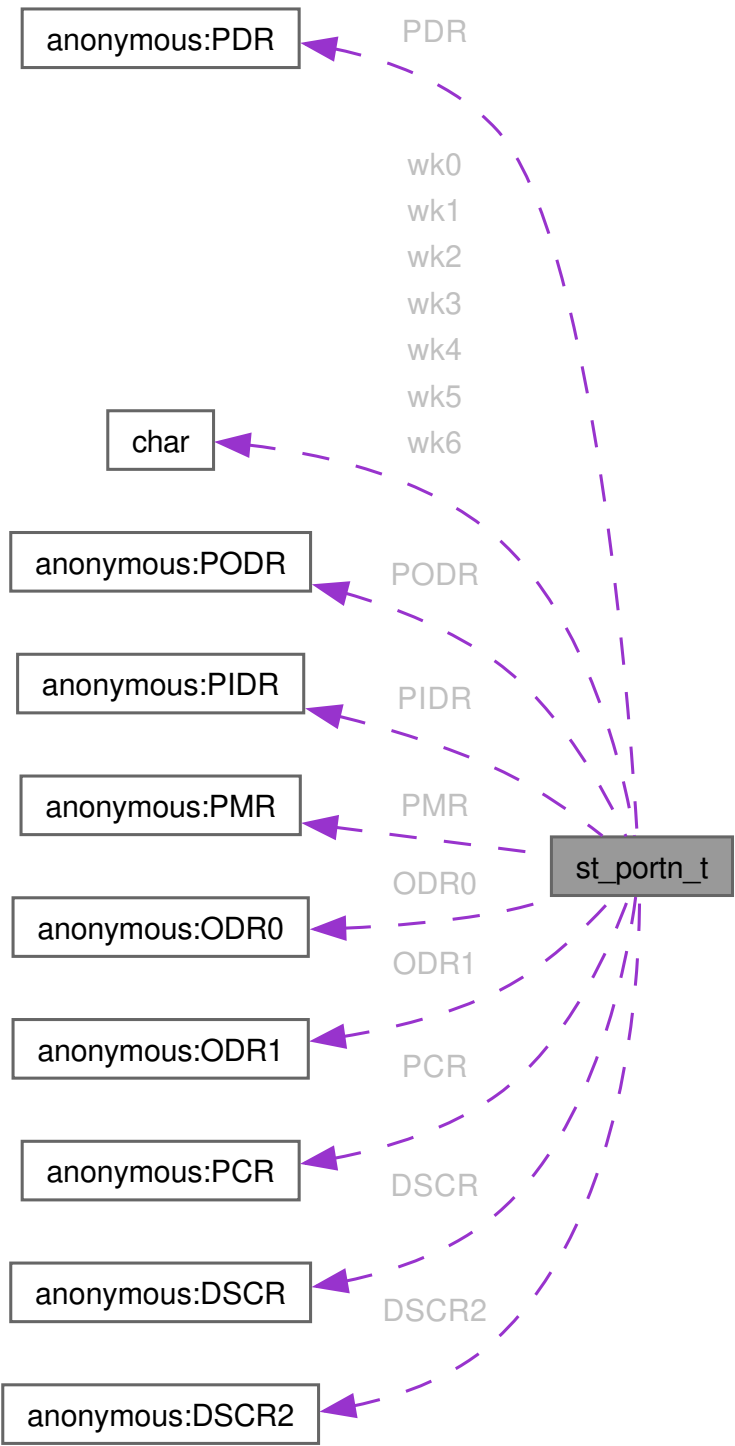

union { ... } st_portn_t::DSCR

union { ... } st_portn_t::DSCR2

union { ... } st_portn_t::ODR0

union { ... } st_portn_t::ODR1

union { ... } st_portn_t::PCR

union { ... } st_portn_t::PDR

union { ... } st_portn_t::PIDR

union { ... } st_portn_t::PMR

union { ... } st_portn_t::PODR

char st_portn_t::wk0[31]

char st_portn_t::wk1[31]

char st_portn_t::wk2[31]


char st_portn_t::wk3[53]

char st_portn_t::wk4[40]

char st_portn_t::wk5[31]

char st_portn_t::wk6[71]

```
#include <iodefine.h>
```

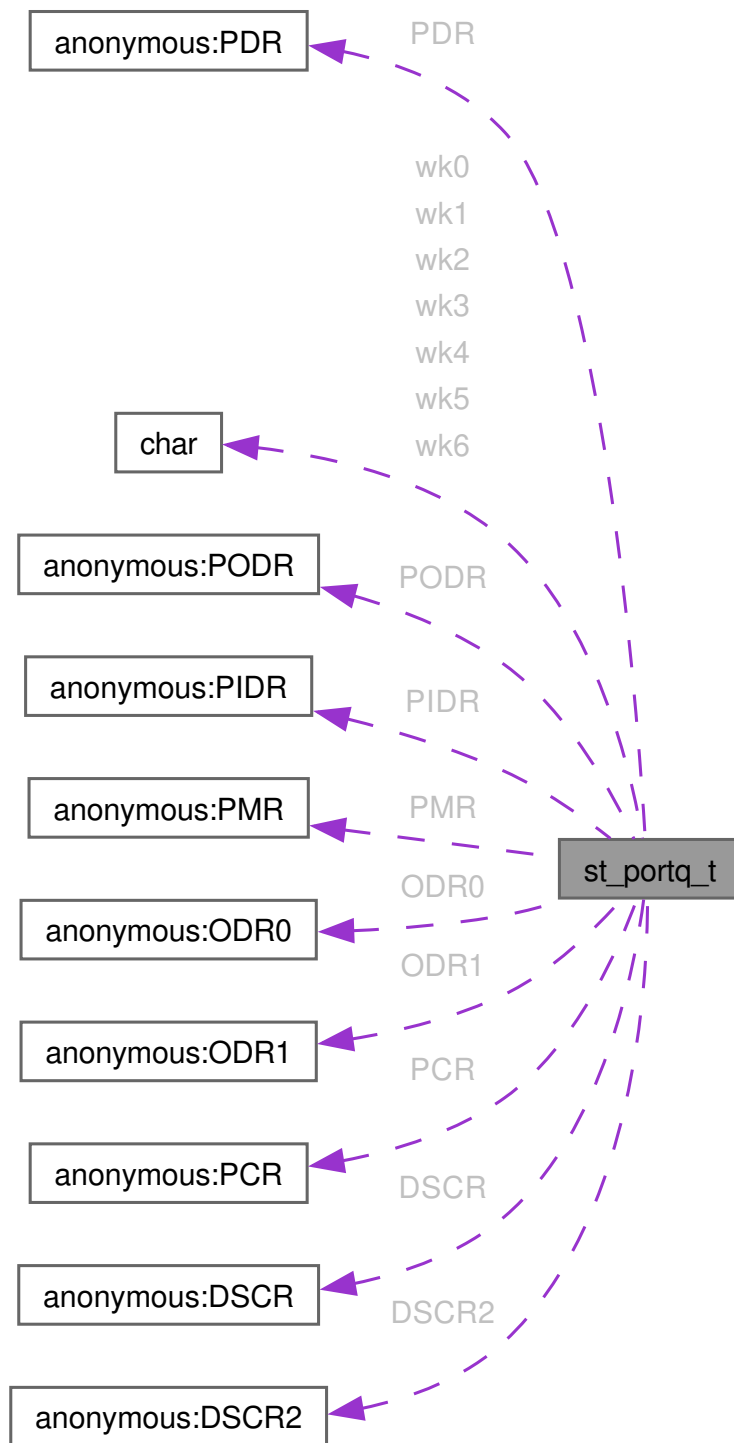

```
union { ... } st_portq_t::DSCR
union { ... } st_portq_t::DSCR2
union { ... } st_portq_t::ODR0
union { ... } st_portq_t::ODR1
union { ... } st_portq_t::PCR
union { ... } st_portq_t::PDR
union { ... } st_portq_t::PIDR
union { ... } st_portq_t::PMR
union { ... } st_portq_t::PODR
char st_portq_t::wk0[31]

char st_portq_t::wk1[31]

char st_portq_t::wk2[31]


char st_portq_t::wk3[54]

char st_portq_t::wk4[39]

char st_portq_t::wk5[31]

char st_portq_t::wk6[71]
```

```
#include <iodefine.h>
```

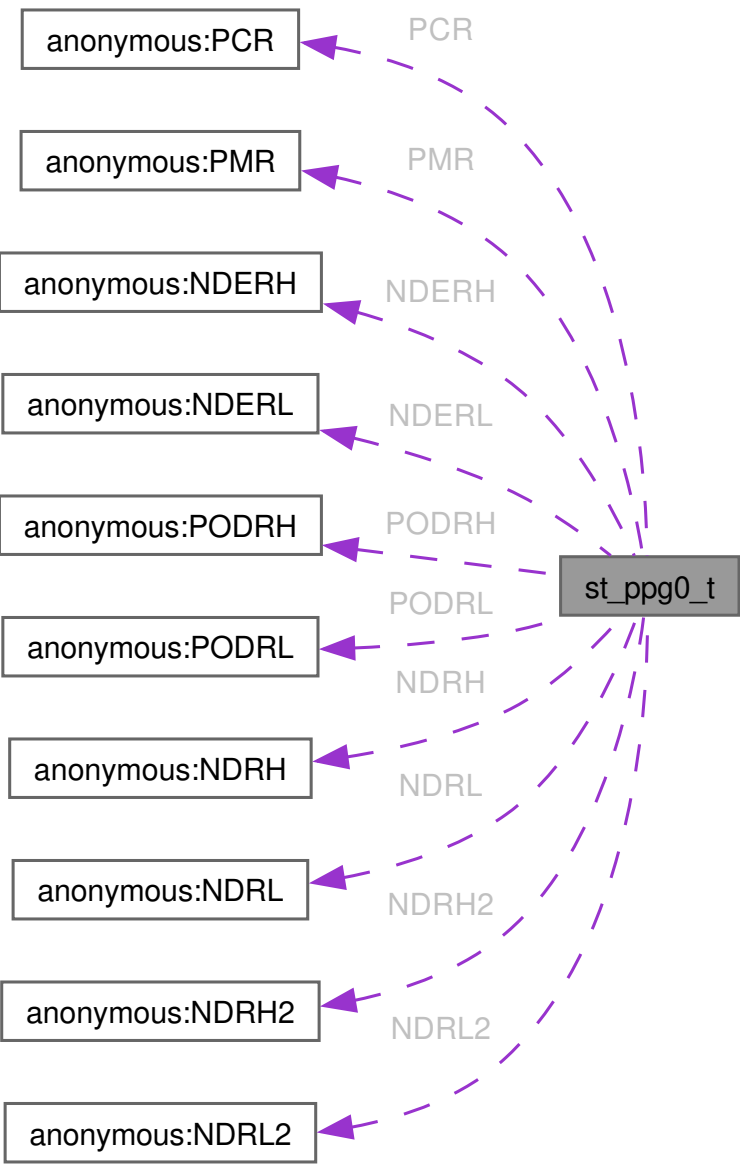

union { ... } st_ppg0_t::NDERH

union { ... } st_ppg0_t::NDERL

union { ... } st_ppg0_t::NDRH

union { ... } st_ppg0_t::NDRH2

union { ... } st_ppg0_t::NDRL

union { ... } st_ppg0_t::NDRL2


union { ... } st_ppg0_t::PCR

union { ... } st_ppg0_t::PMR

union { ... } st_ppg0_t::PODRH

union { ... } st_ppg0_t::PODRL

```
#include <iodefine.h>
```

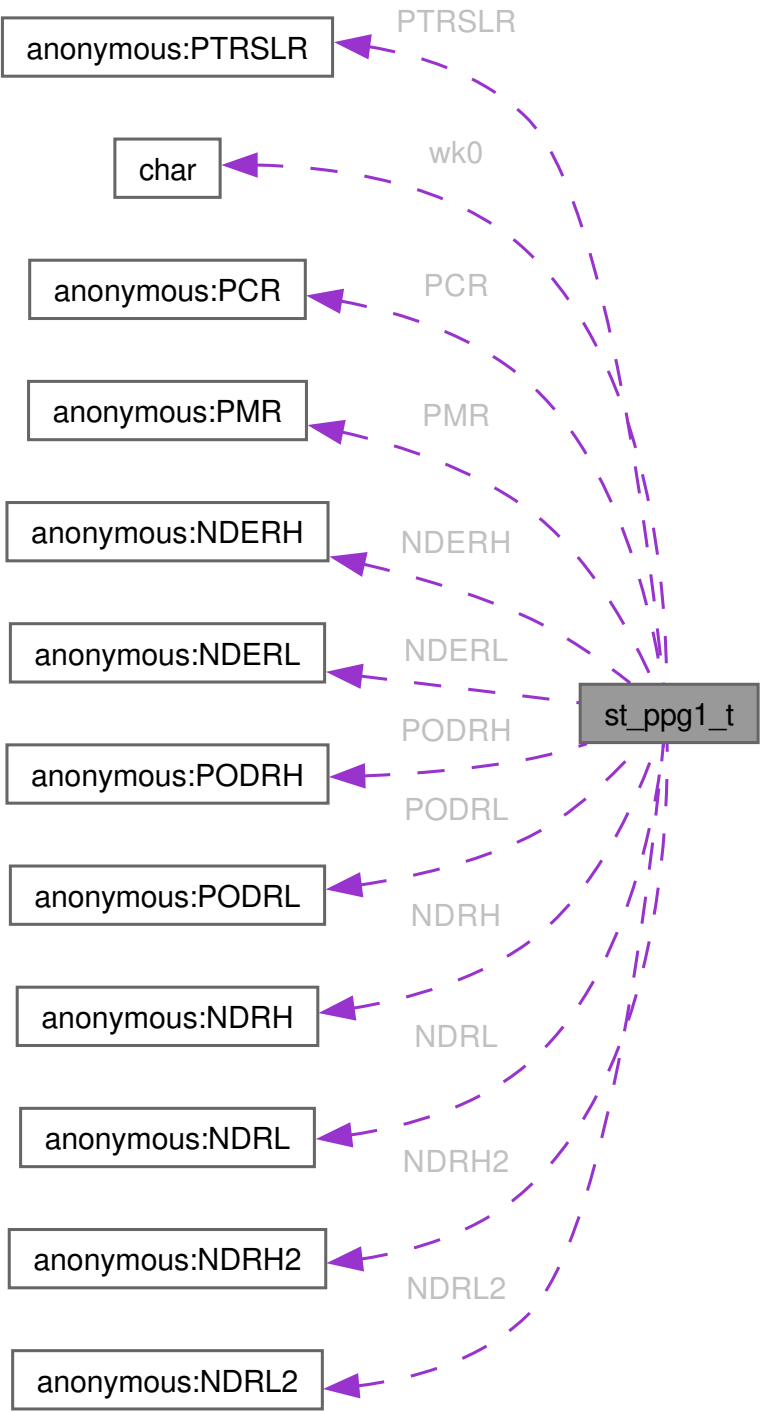

union { ... } st_ppg1_t::NDERH

union { ... } st_ppg1_t::NDERL

union { ... } st_ppg1_t::NDRH

union { ... } st_ppg1_t::NDRH2

union { ... } st_ppg1_t::NDRL

union { ... } st_ppg1_t::NDRL2

union { ... } st_ppg1_t::PCR

union { ... } st_ppg1_t::PMR


union { ... } st_ppg1_t::PODRH

union { ... } st_ppg1_t::PODRL

union { ... } st_ppg1_t::PTRSLR

char st_ppg1_t::wk0[5]

```
#include <iodefine.h>
```

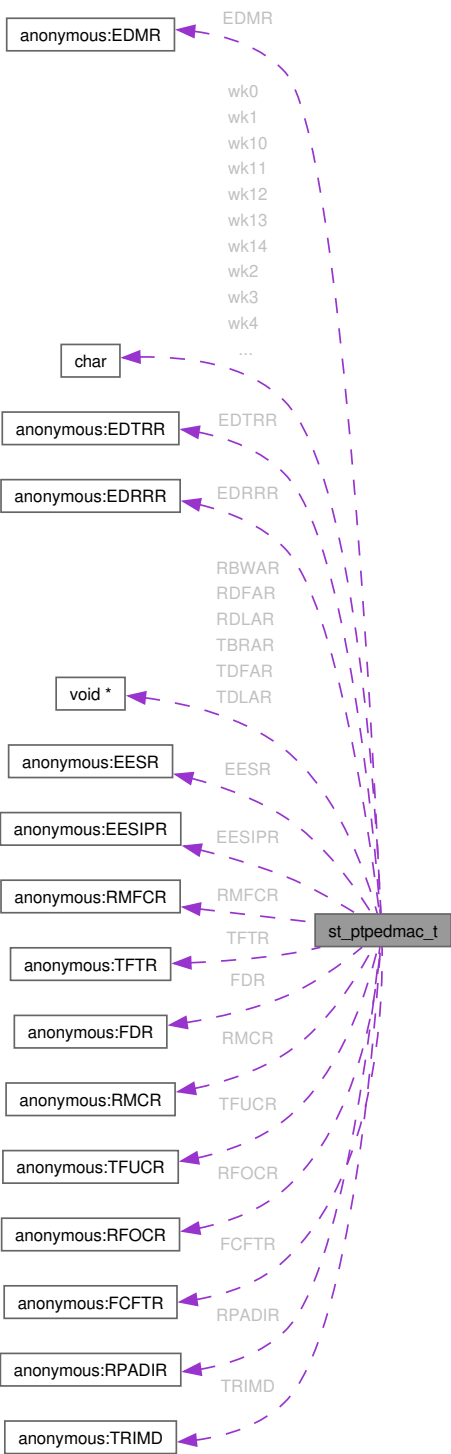

*

*

*
*

*
*

union { ... } st_ptpedmac_t::EDMR
union { ... } st_ptpedmac_t::EDRRR
union { ... } st_ptpedmac_t::EDTRR
union { ... } st_ptpedmac_t::EESIPR
union { ... } st_ptpedmac_t::EESR

union { ... } st_ptpedmac_t::FCFTR

union { ... } st_ptpedmac_t::FDR

void* st_ptpedmac_t::RBWAR

void* st_ptpedmac_t::RDFAR

void* st_ptpedmac_t::RDLAR

union { ... } st_ptpedmac_t::RFOCR

union { ... } st_ptpedmac_t::RMCR

union { ... } st_ptpedmac_t::RMFCR

union { ... } st_ptpedmac_t::RPADIR

void* st_ptpedmac_t::TBRAR

void* st_ptpedmac_t::TDFAR

void* st_ptpedmac_t::TDLAR

union { ... } st_ptpedmac_t::TFTR

union { ... } st_ptpedmac_t::TFUCR

union { ... } st_ptpedmac_t::TRIMD

char st_ptpedmac_t::wk0[4]

char st_ptpedmac_t::wk1[4]

char st_ptpedmac_t::wk10[8]

char st_ptpedmac_t::wk11[4]

char st_ptpedmac_t::wk12[4]

char st_ptpedmac_t::wk13[72]

char st_ptpedmac_t::wk14[4]

char st_ptpedmac_t::wk2[4]

char st_ptpedmac_t::wk3[4]

char st_ptpedmac_t::wk4[4]

char st_ptpedmac_t::wk5[4]


char st_ptpedmac_t::wk6[12]

char st_ptpedmac_t::wk7[4]

char st_ptpedmac_t::wk8[4]

char st_ptpedmac_t::wk9[4]

```
#include <iodef.h>
```

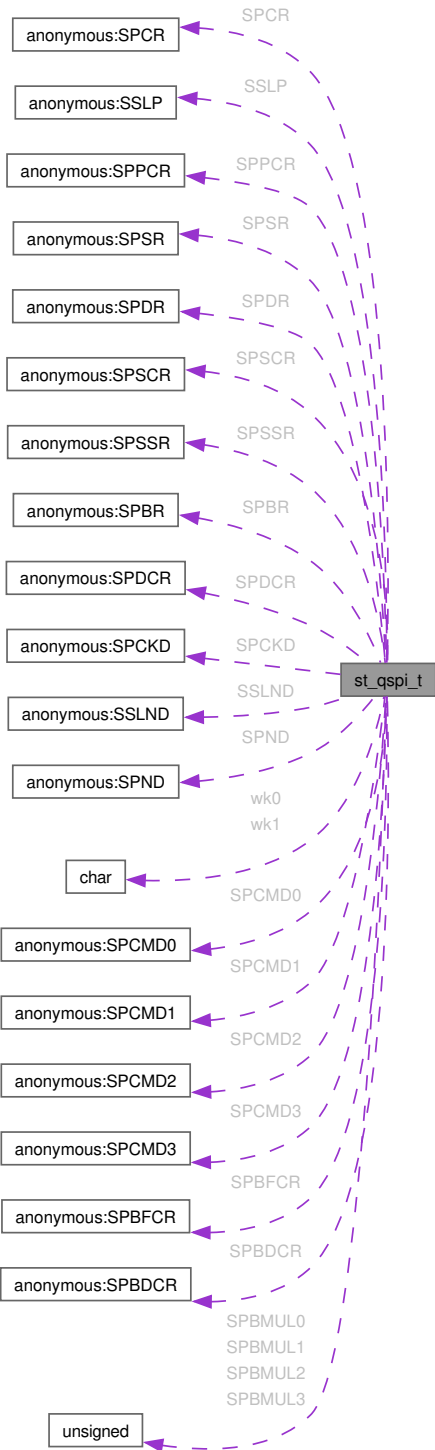

union { ... } st_qspi_t::SPBDCR

union { ... } st_qspi_t::SPBFCR

unsigned long st_qspi_t::SPBMUL0

unsigned long st_qspi_t::SPBMUL1

unsigned long st_qspi_t::SPBMUL2

unsigned long st_qspi_t::SPBMUL3

union { ... } st_qspi_t::SPBR

union { ... } st_qspi_t::SPCKD

union { ... } st_qspi_t::SPCMD0

union { ... } st_qspi_t::SPCMD1

union { ... } st_qspi_t::SPCMD2

union { ... } st_qspi_t::SPCMD3

union { ... } st_qspi_t::SPCR

union { ... } st_qspi_t::SPDCR

union { ... } st_qspi_t::SPDR

union { ... } st_qspi_t::SPND

union { ... } st_qspi_t::SPPCR

union { ... } st_qspi_t::SPSCR

union { ... } st_qspi_t::SPSR

union { ... } st_qspi_t::SPSSR


union { ... } st_qspi_t::SSLND

union { ... } st_qspi_t::SSLP

char st_qspi_t::wk0[1]

char st_qspi_t::wk1[1]

```
#include <iodef.h>
```

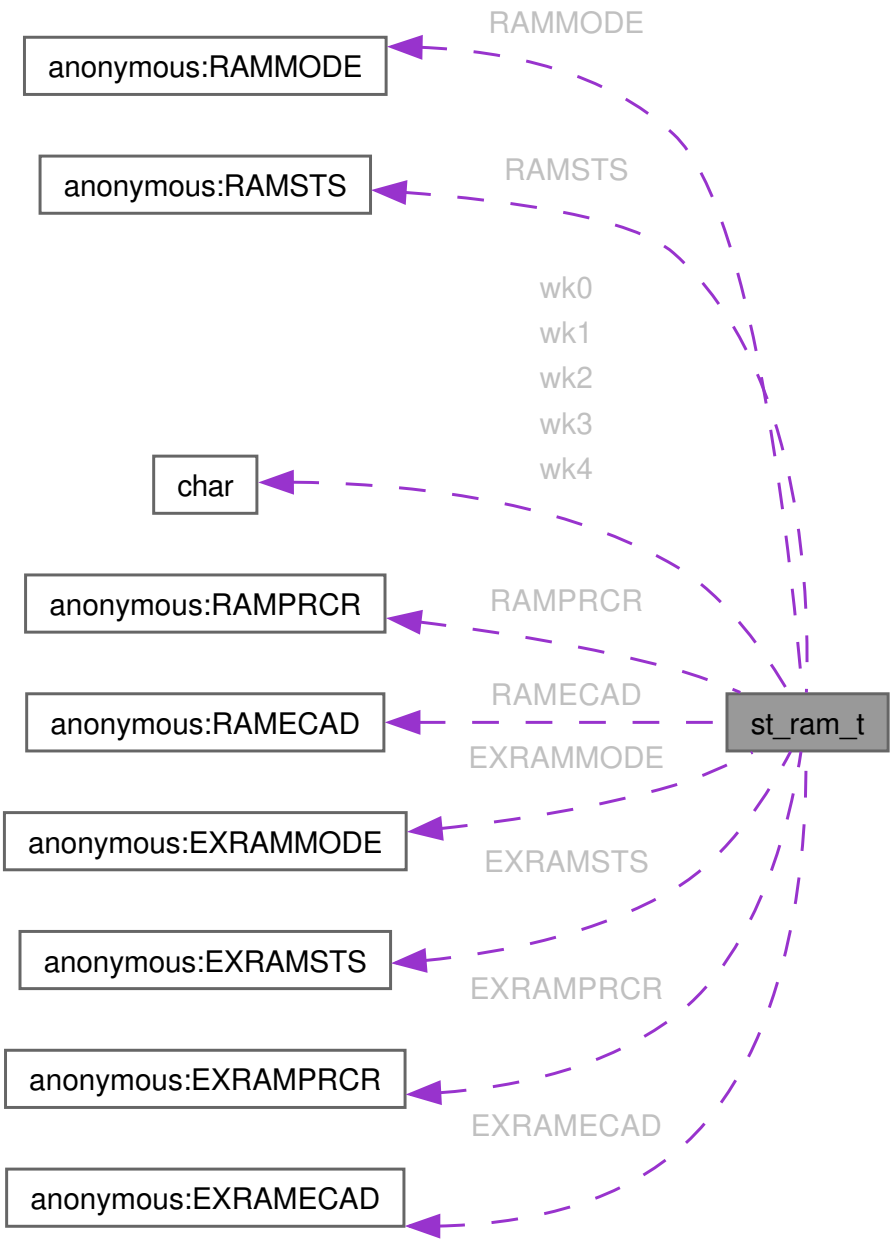

```
union { ... } st_ram_t::EXRAMECAD
```

```
union { ... } st_ram_t::EXRAMMODE
```

```
union { ... } st_ram_t::EXRAMPRCR
```

```
union { ... } st_ram_t::EXRAMSTS
```

```
union { ... } st_ram_t::RAMECAD
```

```
union { ... } st_ram_t::RAMMODE
```

```
union { ... } st_ram_t::RAMPRCR
```

```
union { ... } st_ram_t::RAMSTS
```

```
char st_ram_t::wk0[2]
```


```
char st_ram_t::wk1[3]
```

```
char st_ram_t::wk2[52]
```

```
char st_ram_t::wk3[2]
```

```
char st_ram_t::wk4[3]
```

```
#include <iodefine.h>
```

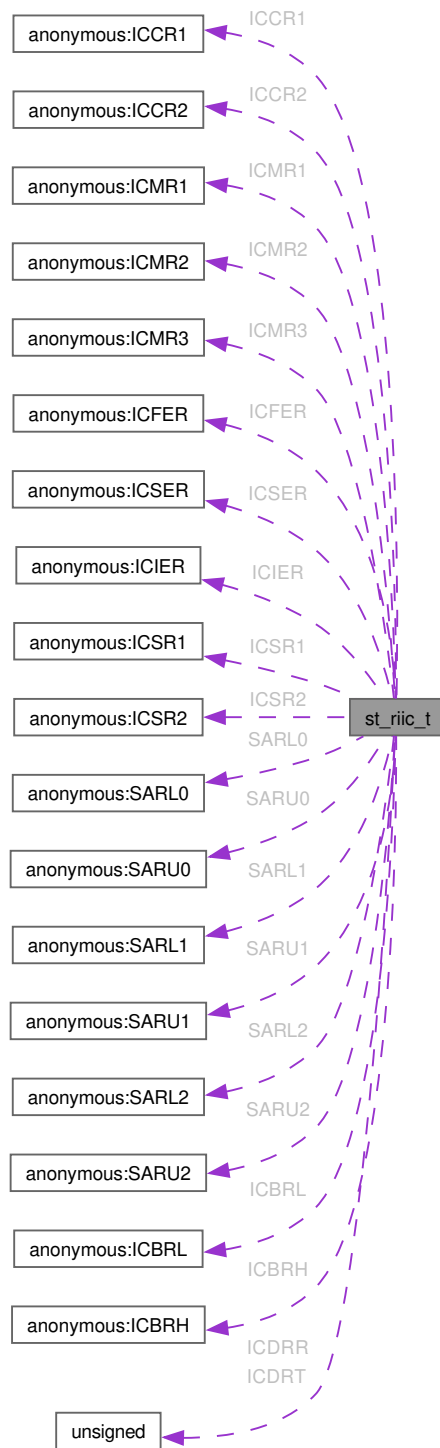

union { ... } st_riic_t::ICBRH

union { ... } st_riic_t::ICBRL

union { ... } st_riic_t::ICCR1

union { ... } st_riic_t::ICCR2

unsigned char st_riic_t::ICDRR

unsigned char st_riic_t::ICDRT

union { ... } st_riic_t::ICFER

union { ... } st_riic_t::ICIER

union { ... } st_riic_t::ICMR1

union { ... } st_riic_t::ICMR2

union { ... } st_riic_t::ICMR3

union { ... } st_riic_t::ICSER

union { ... } st_riic_t::ICSR1

union { ... } st_riic_t::ICSR2

union { ... } st_riic_t::SARL0

union { ... } st_riic_t::SARL1


union { ... } st_riic_t::SARL2

union { ... } st_riic_t::SARU0

union { ... } st_riic_t::SARU1

union { ... } st_riic_t::SARU2

```
#include <iodefinc.h>
```

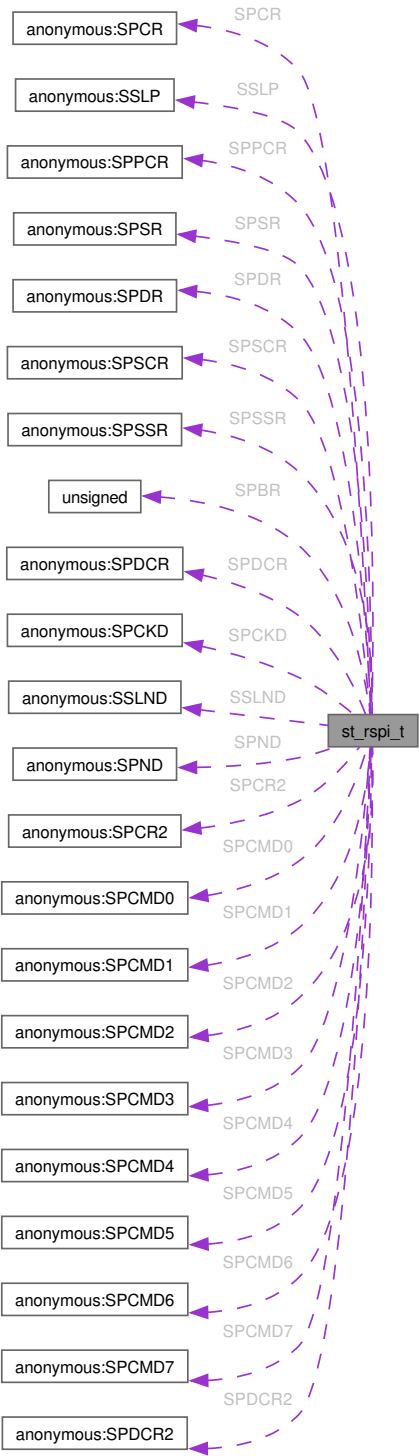

unsigned char st_rspi_t::SPBR

union { ... } st_rspi_t::SPCKD

union { ... } st_rspi_t::SPCMD0

union { ... } st_rspi_t::SPCMD1

union { ... } st_rspi_t::SPCMD2

union { ... } st_rspi_t::SPCMD3

union { ... } st_rspi_t::SPCMD4

union { ... } st_rspi_t::SPCMD5

union { ... } st_rspi_t::SPCMD6

union { ... } st_rspi_t::SPCMD7

union { ... } st_rspi_t::SPCR

union { ... } st_rspi_t::SPCR2

union { ... } st_rspi_t::SPDCR

union { ... } st_rspi_t::SPDCR2

union { ... } st_rspi_t::SPDR

union { ... } st_rspi_t::SPND

union { ... } st_rspi_t::SPPCR

union { ... } st_rspi_t::SPSCR


union { ... } st_rspi_t::SPSR

union { ... } st_rspi_t::SPSSR

union { ... } st_rspi_t::SSLND

union { ... } st_rspi_t::SSLP

```
#include <iodefine.h>
```

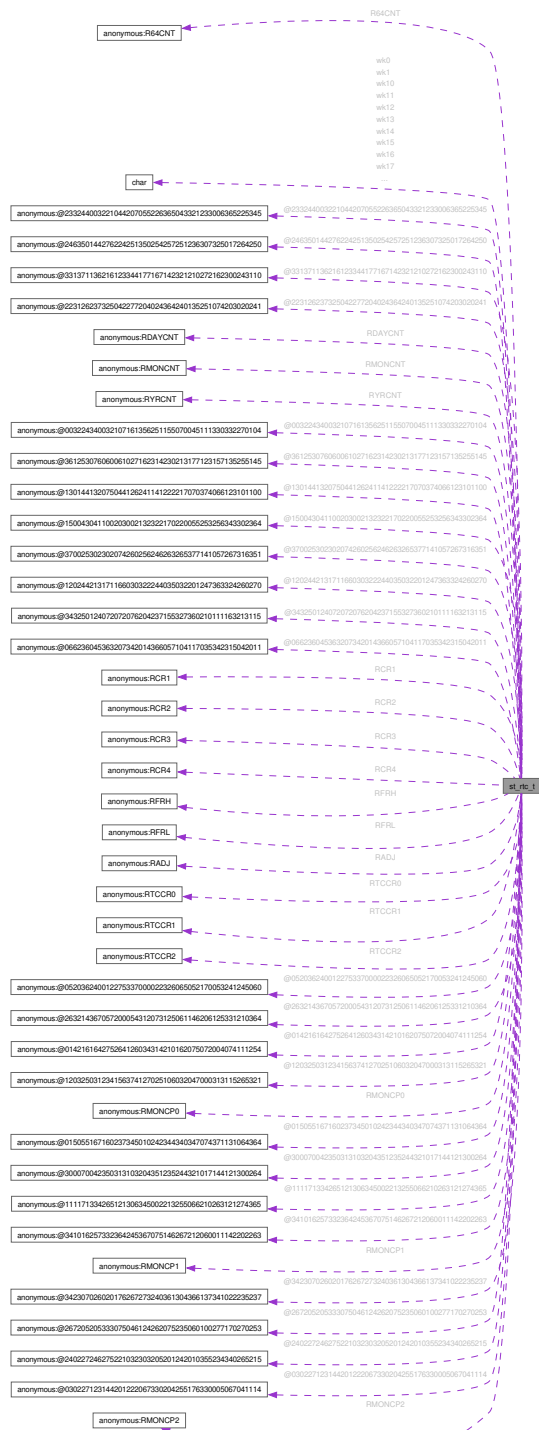

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } [st_rtc_t](#)

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t

union { ... } st_rtc_t::R64CNT

union { ... } st_rtc_t::RADJ

union { ... } st_rtc_t::RCR1

union { ... } st_rtc_t::RCR2

union { ... } st_rtc_t::RCR3

union { ... } st_rtc_t::RCR4

union { ... } st_rtc_t::RDAYCNT

union { ... } st_rtc_t::RFRH

union { ... } st_rtc_t::RFRL

union { ... } st_rtc_t::RMONCNT

union { ... } st_rtc_t::RMONCP0

union { ... } st_rtc_t::RMONCP1

union { ... } st_rtc_t::RMONCP2

union { ... } st_rtc_t::RTCCR0

union { ... } st_rtc_t::RTCCR1

union { ... } st_rtc_t::RTCCR2

union { ... } st_rtc_t::RYRCNT

char st_rtc_t::wk0[1]

char st_rtc_t::wk1[1]

char st_rtc_t::wk10[1]

char st_rtc_t::wk11[1]

char st_rtc_t::wk12[1]

char st_rtc_t::wk13[3]

char st_rtc_t::wk14[1]

char st_rtc_t::wk15[1]

char st_rtc_t::wk16[1]

char st_rtc_t::wk17[1]

char st_rtc_t::wk18[17]

char st_rtc_t::wk19[1]

char st_rtc_t::wk2[1]

char st_rtc_t::wk20[1]

char st_rtc_t::wk21[13]

char st_rtc_t::wk22[1]

char st_rtc_t::wk23[1]

char st_rtc_t::wk24[3]

char st_rtc_t::wk25[1]

char st_rtc_t::wk26[5]

char st_rtc_t::wk27[1]

char st_rtc_t::wk28[1]

char st_rtc_t::wk29[3]

char st_rtc_t::wk3[1]

char st_rtc_t::wk30[1]

char st_rtc_t::wk31[5]

char st_rtc_t::wk32[1]

char st_rtc_t::wk33[1]

char st_rtc_t::wk34[3]

char st_rtc_t::wk35[1]

char st_rtc_t::wk4[1]

char st_rtc_t::wk5[1]


char st_rtc_t::wk6[1]

char st_rtc_t::wk7[1]

char st_rtc_t::wk8[1]

char st_rtc_t::wk9[1]

`#include <iodefne.h>`

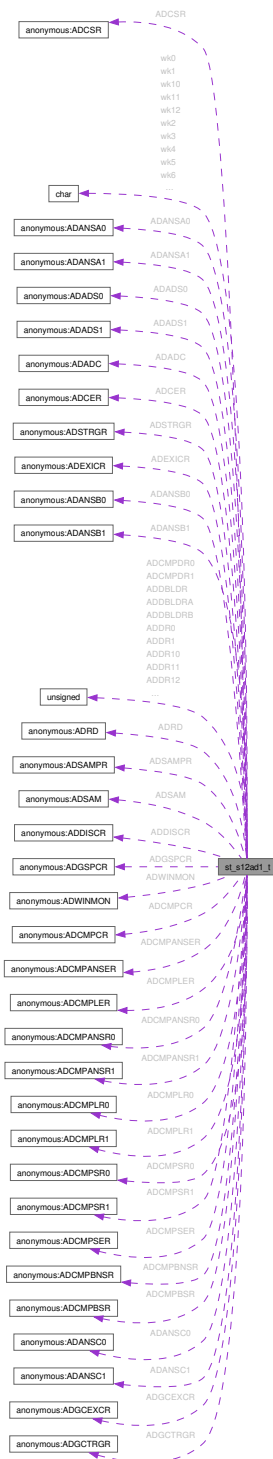

union { ... } st_s12ad1_t::ADADC

union { ... } st_s12ad1_t::ADADS0

union { ... } st_s12ad1_t::ADADS1

union { ... } st_s12ad1_t::ADANSA0

union { ... } st_s12ad1_t::ADANSA1

union { ... } st_s12ad1_t::ADANSB0

union { ... } st_s12ad1_t::ADANSB1

union { ... } st_s12ad1_t::ADANSC0

union { ... } st_s12ad1_t::ADANSC1

union { ... } st_s12ad1_t::ADCER

union { ... } st_s12ad1_t::ADCMPANSER

union { ... } st_s12ad1_t::ADCMPANSR0

union { ... } st_s12ad1_t::ADCMPANSR1

union { ... } st_s12ad1_t::ADCM PBNSR

union { ... } st_s12ad1_t::ADCM PBSR

union { ... } st_s12ad1_t::ADCM PCR

unsigned short st_s12ad1_t::ADCM PDR0

unsigned short st_s12ad1_t::ADCM PDR1

union { ... } st_s12ad1_t::ADCM PLER

union { ... } st_s12ad1_t::ADCM PLR0

union { ... } st_s12ad1_t::ADCM PLR1

union { ... } st_s12ad1_t::ADCM PSER

union { ... } st_s12ad1_t::ADCM PSR0

union { ... } st_s12ad1_t::ADCM PSR1

union { ... } st_s12ad1_t::ADCSR

unsigned short st_s12ad1_t::ADDBLDR

unsigned short st_s12ad1_t::ADDBLDRA

unsigned short st_s12ad1_t::ADDBLDRB

union { ... } st_s12ad1_t::ADDISCR

unsigned short st_s12ad1_t::ADDR0

unsigned short st_s12ad1_t::ADDR1

unsigned short st_s12ad1_t::ADDR10

unsigned short st_s12ad1_t::ADDR11

unsigned short st_s12ad1_t::ADDR12

unsigned short st_s12ad1_t::ADDR13

unsigned short st_s12ad1_t::ADDR14

unsigned short st_s12ad1_t::ADDR15

unsigned short st_s12ad1_t::ADDR16

unsigned short st_s12ad1_t::ADDR17

unsigned short st_s12ad1_t::ADDR18

unsigned short st_s12ad1_t::ADDR19

unsigned short st_s12ad1_t::ADDR2

unsigned short st_s12ad1_t::ADDR20

unsigned short st_s12ad1_t::ADDR3

unsigned short st_s12ad1_t::ADDR4

unsigned short st_s12ad1_t::ADDR5

unsigned short st_s12ad1_t::ADDR6

unsigned short st_s12ad1_t::ADDR7

unsigned short st_s12ad1_t::ADDR8

unsigned short st_s12ad1_t::ADDR9

union { ... } st_s12ad1_t::ADEXICR

union { ... } st_s12ad1_t::ADGCCEXCR

union { ... } st_s12ad1_t::ADGCTRGR

union { ... } st_s12ad1_t::ADGSPCR

unsigned short st_s12ad1_t::ADOCDR

union { ... } st_s12ad1_t::ADRD

union { ... } st_s12ad1_t::ADSAM

union { ... } st_s12ad1_t::ADSAMPR

unsigned char st_s12ad1_t::ADSSTR0

unsigned char st_s12ad1_t::ADSSTR1

unsigned char st_s12ad1_t::ADSSTR10

unsigned char st_s12ad1_t::ADSSTR11

unsigned char st_s12ad1_t::ADSSTR12

unsigned char st_s12ad1_t::ADSSTR13

unsigned char st_s12ad1_t::ADSSTR14

unsigned char st_s12ad1_t::ADSSTR15

unsigned char st_s12ad1_t::ADSSTR2

unsigned char st_s12ad1_t::ADSSTR3

unsigned char st_s12ad1_t::ADSSTR4

unsigned char st_s12ad1_t::ADSSTR5

unsigned char st_s12ad1_t::ADSSTR6

unsigned char st_s12ad1_t::ADSSTR7

unsigned char st_s12ad1_t::ADSSTR8

unsigned char st_s12ad1_t::ADSSTR9

unsigned char st_s12ad1_t::ADSSTRL

unsigned char st_s12ad1_t::ADSSTRO

unsigned char st_s12ad1_t::ADSSTRT

union { ... } st_s12ad1_t::ADSTRGR

unsigned short st_s12ad1_t::ADTSDR

unsigned short st_s12ad1_t::ADWINLLB

union { ... } st_s12ad1_t::ADWINMON

unsigned short st_s12ad1_t::ADWINULB

char st_s12ad1_t::wk0[2]

char st_s12ad1_t::wk1[1]

char st_s12ad1_t::wk10[1]

char st_s12ad1_t::wk11[39]

char st_s12ad1_t::wk12[3]

char st_s12ad1_t::wk2[25]

char st_s12ad1_t::wk3[10]

char st_s12ad1_t::wk4[10]

char st_s12ad1_t::wk5[5]

char st_s12ad1_t::wk6[2]

char st_s12ad1_t::wk7[4]

char st_s12ad1_t::wk8[3]

char st_s12ad1_t::wk9[1]

```
union { ... } st_s12ad_t::ADADC
union { ... } st_s12ad_t::ADADS0
union { ... } st_s12ad_t::ADANSA0
union { ... } st_s12ad_t::ADANSB0
union { ... } st_s12ad_t::ADANSC0
union { ... } st_s12ad_t::ADCER
union { ... } st_s12ad_t::ADCMPANSR0
union { ... } st_s12ad_t::ADCMPBNSR
union { ... } st_s12ad_t::ADCMPBSR
union { ... } st_s12ad_t::ADCMPCR
unsigned short st_s12ad_t::ADCMPDR0

unsigned short st_s12ad_t::ADCMPDR1
```

union { ... } st_s12ad_t::ADCMPLR0

union { ... } st_s12ad_t::ADCMPSR0

union { ... } st_s12ad_t::ADCSR

union { ... } st_s12ad_t::ADDBLDR

unsigned short st_s12ad_t::ADDBLDRA

unsigned short st_s12ad_t::ADDBLDRB

union { ... } st_s12ad_t::ADDISCR

unsigned short st_s12ad_t::ADDR0

unsigned short st_s12ad_t::ADDR1

unsigned short st_s12ad_t::ADDR2

unsigned short st_s12ad_t::ADDR3

unsigned short st_s12ad_t::ADDR4

unsigned short st_s12ad_t::ADDR5

unsigned short st_s12ad_t::ADDR6

unsigned short st_s12ad_t::ADDR7

union { ... } st_s12ad_t::ADGCTRGR

union { ... } st_s12ad_t::ADGSPCR

union { ... } st_s12ad_t::ADRD

union { ... } st_s12ad_t::ADSAM

union { ... } st_s12ad_t::ADSAMPR

union { ... } st_s12ad_t::ADSHCR

union { ... } st_s12ad_t::ADSHMSR

unsigned char st_s12ad_t::ADSSTR0

unsigned char st_s12ad_t::ADSSTR1

unsigned char st_s12ad_t::ADSSTR2

unsigned char st_s12ad_t::ADSSTR3

unsigned char st_s12ad_t::ADSSTR4

unsigned char st_s12ad_t::ADSSTR5

unsigned char st_s12ad_t::ADSSTR6

unsigned char st_s12ad_t::ADSSTR7

union { ... } st_s12ad_t::ADSTRGR

unsigned short st_s12ad_t::ADWINLLB

union { ... } st_s12ad_t::ADWINMON

unsigned short st_s12ad_t::ADWINULB

char st_s12ad_t::wk0[2]

char st_s12ad_t::wk1[2]

char st_s12ad_t::wk10[10]

char st_s12ad_t::wk11[1]

char st_s12ad_t::wk12[3]

char st_s12ad_t::wk13[2]

char st_s12ad_t::wk14[4]

char st_s12ad_t::wk15[3]

char st_s12ad_t::wk16[2]

char st_s12ad_t::wk17[2]

char st_s12ad_t::wk18[2]

char st_s12ad_t::wk19[4]

char st_s12ad_t::wk2[2]

char st_s12ad_t::wk20[1]

char st_s12ad_t::wk21[39]

char st_s12ad_t::wk22[3]

char st_s12ad_t::wk23[6]

char st_s12ad_t::wk3[1]

char st_s12ad_t::wk4[2]

char st_s12ad_t::wk5[2]


char st_s12ad_t::wk6[4]

char st_s12ad_t::wk7[51]

char st_s12ad_t::wk8[2]

char st_s12ad_t::wk9[6]

```
#include <iodefine.h>
```

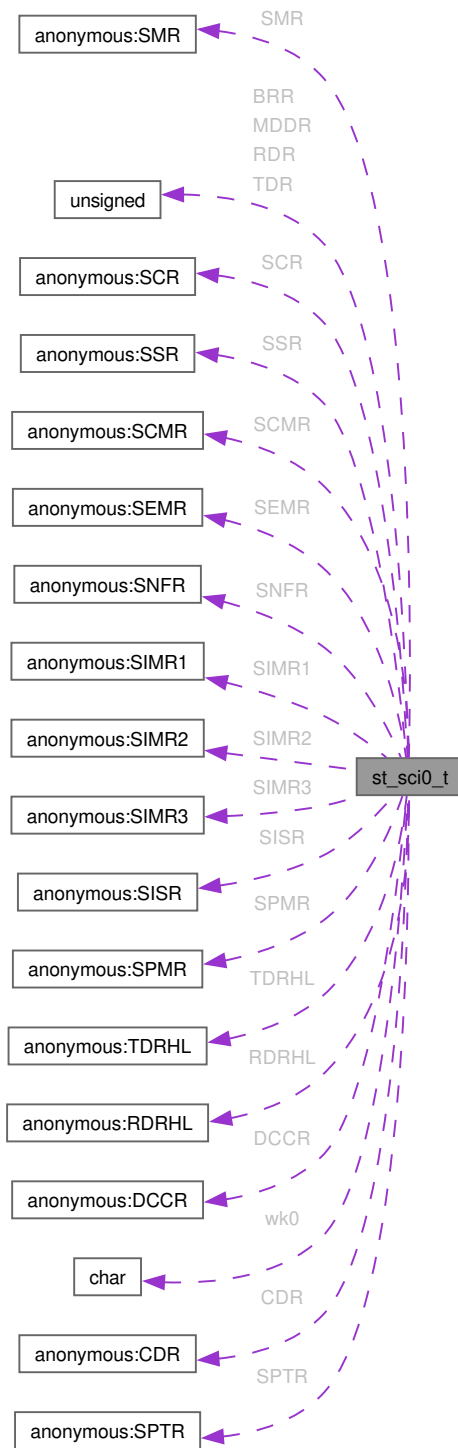

unsigned char st_sci0_t::BRR

union { ... } st_sci0_t::CDR

union { ... } st_sci0_t::DCCR

unsigned char st_sci0_t::MDDR

unsigned char st_sci0_t::RDR

union { ... } st_sci0_t::RDRHL

union { ... } st_sci0_t::SCMR

union { ... } st_sci0_t::SCR

union { ... } st_sci0_t::SEMR

union { ... } st_sci0_t::SIMR1

union { ... } st_sci0_t::SIMR2

union { ... } st_sci0_t::SIMR3

union { ... } st_sci0_t::SISR

union { ... } st_sci0_t::SMR

union { ... } st_sci0_t::SNFR

union { ... } st_sci0_t::SPMR

union { ... } st_sci0_t::SPTR


union { ... } st_sci0_t::SSR

unsigned char st_sci0_t::TDR

union { ... } st_sci0_t::TDRHL

char st_sci0_t::wk0[6]

```
#include <iodefine.h>
```

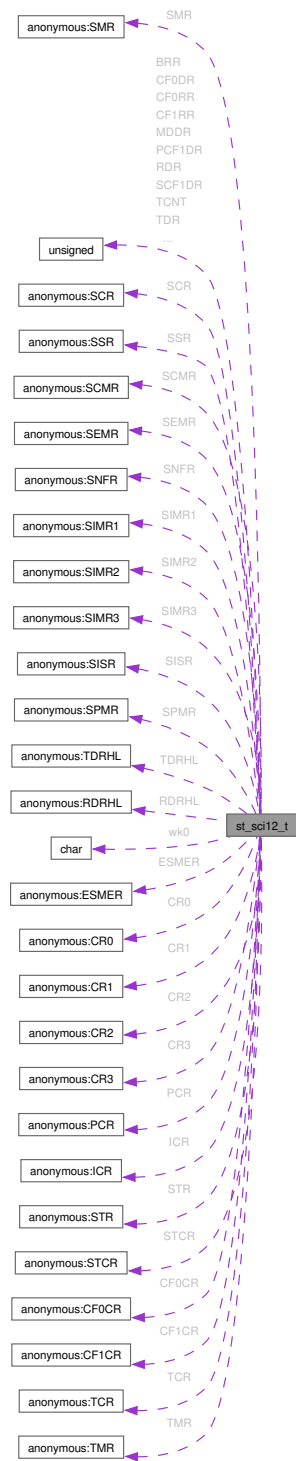

unsigned char st_sci12_t::BRR

union { ... } st_sci12_t::CF0CR

unsigned char st_sci12_t::CF0DR

unsigned char st_sci12_t::CF0RR

union { ... } st_sci12_t::CF1CR

unsigned char st_sci12_t::CF1RR

union { ... } st_sci12_t::CR0

union { ... } st_sci12_t::CR1

union { ... } st_sci12_t::CR2

union { ... } st_sci12_t::CR3

union { ... } st_sci12_t::ESMER

union { ... } st_sci12_t::ICR

unsigned char st_sci12_t::MDDR

unsigned char st_sci12_t::PCF1DR

union { ... } st_sci12_t::PCR

unsigned char st_sci12_t::RDR

union { ... } st_sci12_t::RDRHL

unsigned char st_sci12_t::SCF1DR

union { ... } st_sci12_t::SCMR

union { ... } st_sci12_t::SCR

union { ... } st_sci12_t::SEMR

union { ... } st_sci12_t::SIMR1

union { ... } st_sci12_t::SIMR2

union { ... } st_sci12_t::SIMR3

union { ... } st_sci12_t::SISR

union { ... } st_sci12_t::SMR

union { ... } st_sci12_t::SNFR

union { ... } st_sci12_t::SPMR

union { ... } st_sci12_t::SSR

union { ... } st_sci12_t::STCR

union { ... } st_sci12_t::STR

unsigned char st_sci12_t::TCNT

union { ... } st_sci12_t::TCR

unsigned char st_sci12_t::TDR


union { ... } st_sci12_t::TDRHL

union { ... } st_sci12_t::TMR

unsigned char st_sci12_t::TPRE

char st_sci12_t::wk0[13]

#include <iodefine.h>

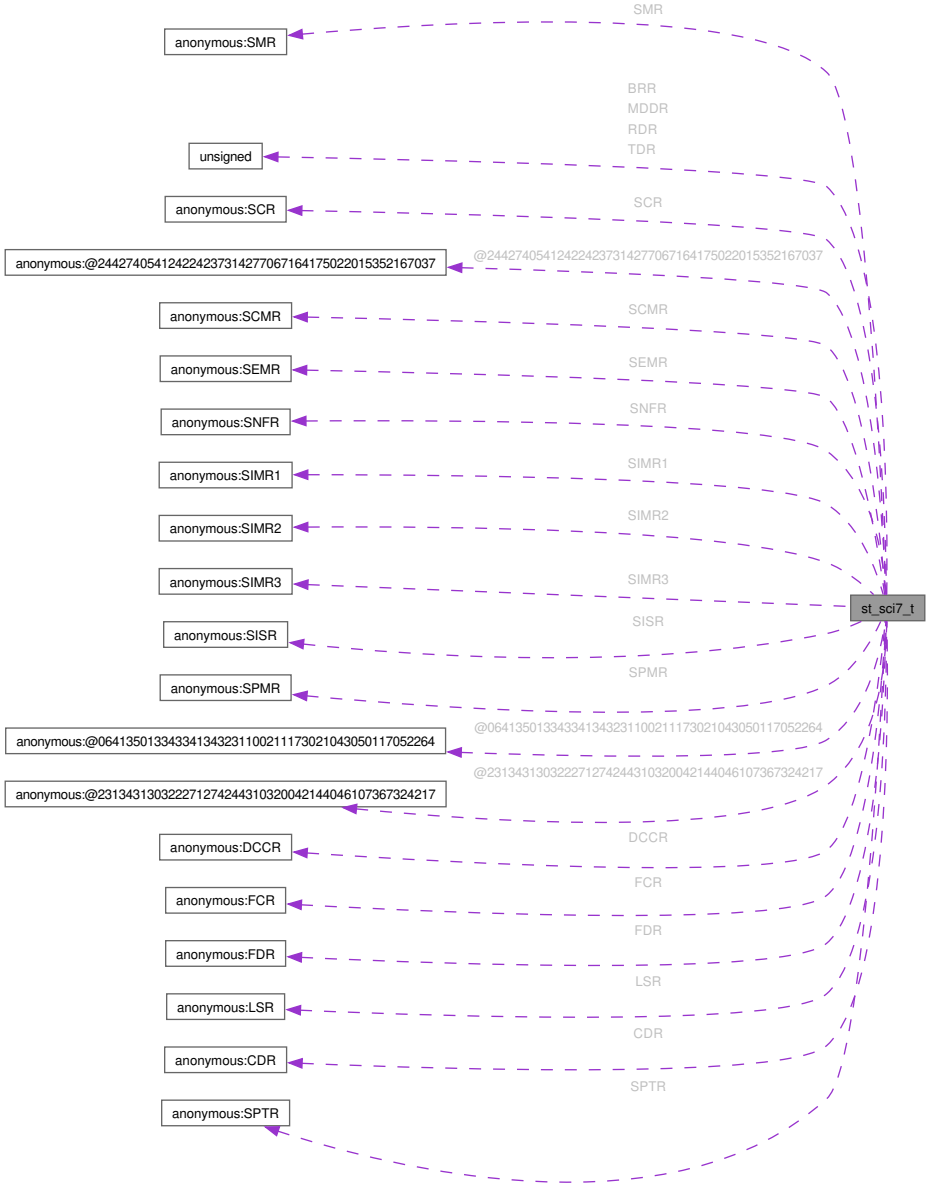

union { ... } st_sci7_t

union { ... } st_sci7_t

union { ... } st_sci7_t

unsigned char st_sci7_t::BRR

union { ... } st_sci7_t::CDR

union { ... } st_sci7_t::DCCR

union { ... } st_sci7_t::FCR

union { ... } st_sci7_t::FDR


union { ... } st_sci7_t::LSR

unsigned char st_sci7_t::MDDR

unsigned char st_sci7_t::RDR

```
union { ... } st_sci7_t::SCMR
union { ... } st_sci7_t::SCR
union { ... } st_sci7_t::SEMR
union { ... } st_sci7_t::SIMR1
union { ... } st_sci7_t::SIMR2
union { ... } st_sci7_t::SIMR3
union { ... } st_sci7_t::SISR
union { ... } st_sci7_t::SMR
union { ... } st_sci7_t::SNFR
union { ... } st_sci7_t::SPMR
union { ... } st_sci7_t::SPTR
unsigned char st_sci7_t::TDR
```

```
#include <iodefine.h>
```

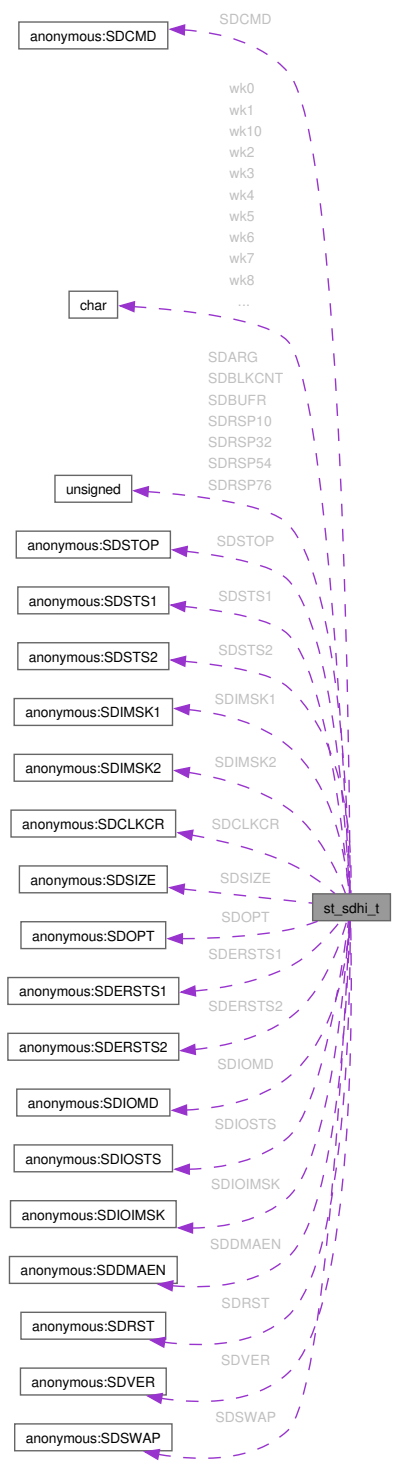

unsigned long st_sdhi_t::SDARG

unsigned long st_sdhi_t::SDBLKCNT

unsigned long st_sdhi_t::SDBUFR

union { ... } st_sdhi_t::SDCLKCR

union { ... } st_sdhi_t::SDCMD

union { ... } st_sdhi_t::SDDMAEN

union { ... } st_sdhi_t::SDERSTS1

union { ... } st_sdhi_t::SDERSTS2

union { ... } st_sdhi_t::SDIMSK1

union { ... } st_sdhi_t::SDIMSK2

union { ... } st_sdhi_t::SDIOIMSK

union { ... } st_sdhi_t::SDIOMD

union { ... } st_sdhi_t::SDIOSTS

union { ... } st_sdhi_t::SDOPT

unsigned long st_sdhi_t::SDRSP10

unsigned long st_sdhi_t::SDRSP32

unsigned long st_sdhi_t::SDRSP54

unsigned long st_sdhi_t::SDRSP76

union { ... } st_sdhi_t::SDRST

union { ... } st_sdhi_t::SDSIZE

union { ... } st_sdhi_t::SDSTOP

union { ... } st_sdhi_t::SDSTS1

union { ... } st_sdhi_t::SDSTS2

union { ... } st_sdhi_t::SDSWAP

union { ... } st_sdhi_t::SDVER

char st_sdhi_t::wk0[4]

char st_sdhi_t::wk1[4]

char st_sdhi_t::wk10[24]

char st_sdhi_t::wk2[4]

char st_sdhi_t::wk3[4]

char st_sdhi_t::wk4[4]

char st_sdhi_t::wk5[4]


char st_sdhi_t::wk6[4]

char st_sdhi_t::wk7[4]

char st_sdhi_t::wk8[316]

char st_sdhi_t::wk9[12]

```
#include <iodefine.h>
```

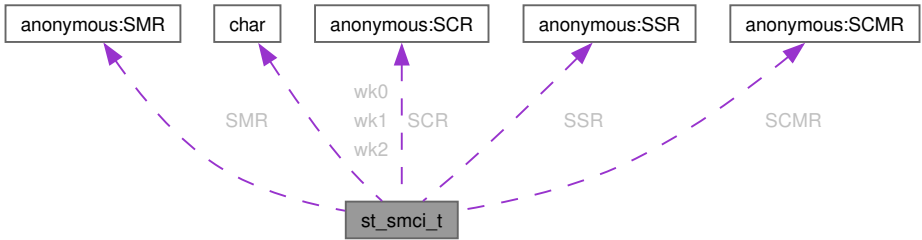

```
union { ... } st_smci_t::SCMR
```

```
union { ... } st_smci_t::SCR
```

```
union { ... } st_smci_t::SMR
```


```
union { ... } st_smci_t::SSR
```

```
char st_smci_t::wk0[1]
```

```
char st_smci_t::wk1[1]
```

```
char st_smci_t::wk2[1]
```

```
#include <iodef.h>
```

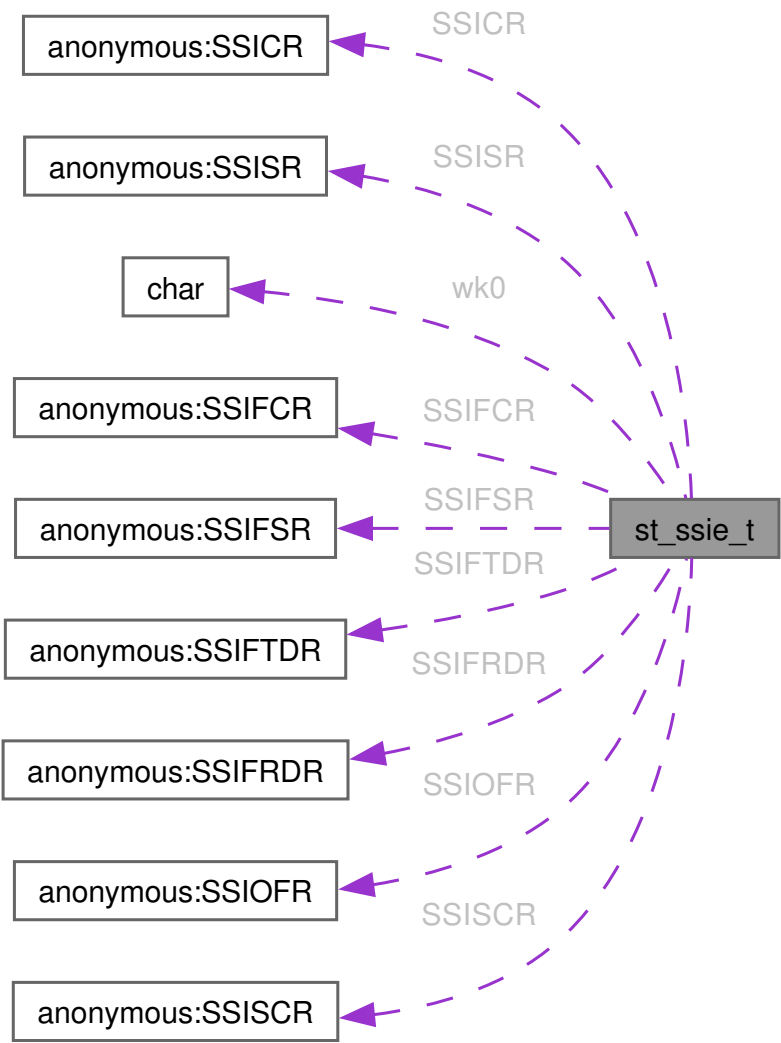

union { ... } st_ssie_t::SSICR

union { ... } st_ssie_t::SSIFCR

union { ... } st_ssie_t::SSIFRDR

union { ... } st_ssie_t::SSIFSR

union { ... } st_ssie_t::SSIFTDR


union { ... } st_ssie_t::SSIOFR

union { ... } st_ssie_t::SSISCR

union { ... } st_ssie_t::SSISR

```
char st_ssie_t::wk0[8]
```

`#include <iodefne.h>`

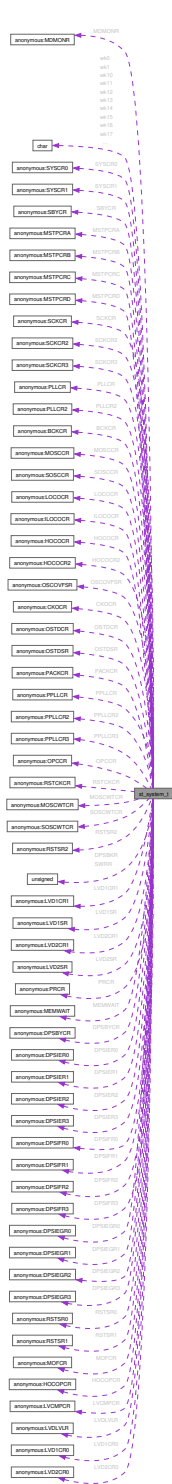

union { ... } st_system_t::BCKCR

union { ... } st_system_t::CKOCR

unsigned char st_system_t::DPSBKR[32]

union { ... } st_system_t::DPSBYCR

union { ... } st_system_t::DPSIEGR0

union { ... } st_system_t::DPSIEGR1

union { ... } st_system_t::DPSIEGR2

union { ... } st_system_t::DPSIEGR3

union { ... } st_system_t::DPSIER0

union { ... } st_system_t::DPSIER1

union { ... } st_system_t::DPSIER2

union { ... } st_system_t::DPSIER3

union { ... } st_system_t::DPSIFR0

union { ... } st_system_t::DPSIFR1

union { ... } st_system_t::DPSIFR2

union { ... } st_system_t::DPSIFR3

union { ... } st_system_t::HOCOCCR

union { ... } st_system_t::HOCOCCR2

union { ... } st_system_t::HOCOPCR

union { ... } st_system_t::ILOCOCCR

union { ... } st_system_t::LOCOCCR

union { ... } st_system_t::LVCMPCCR

union { ... } st_system_t::LVD1CR0

union { ... } st_system_t::LVD1CR1

union { ... } st_system_t::LVD1SR

union { ... } st_system_t::LVD2CR0

union { ... } st_system_t::LVD2CR1

union { ... } st_system_t::LVD2SR

union { ... } st_system_t::LVDLVLRL

union { ... } st_system_t::MDMONR

union { ... } st_system_t::MEMWAIT

union { ... } st_system_t::MOFCR

union { ... } st_system_t::MOSCCR

union { ... } st_system_t::MOSCWTCR

union { ... } st_system_t::MSTPCRA

union { ... } st_system_t::MSTPCRB

union { ... } st_system_t::MSTPCRC

union { ... } st_system_t::MSTPCRD

union { ... } st_system_t::OPCCR

union { ... } st_system_t::OSCOVFSR

union { ... } st_system_t::OSTDCR

```
union { ... } st_system_t::OSTDSR

union { ... } st_system_t::PACKCR

union { ... } st_system_t::PLLCR

union { ... } st_system_t::PLLCR2

union { ... } st_system_t::PLLCR

union { ... } st_system_t::PLLCR2

union { ... } st_system_t::PLLCR3

union { ... } st_system_t::PRCR

union { ... } st_system_t::RSTCKCR

union { ... } st_system_t::RSTSR0

union { ... } st_system_t::RSTSR1

union { ... } st_system_t::RSTSR2

union { ... } st_system_t::SBYCR

union { ... } st_system_t::SCKCR

union { ... } st_system_t::SCKCR2

union { ... } st_system_t::SCKCR3

union { ... } st_system_t::SOSCCR

union { ... } st_system_t::SOSCWTCR

unsigned short st_system_t::SWRR


union { ... } st_system_t::SYSCR0

union { ... } st_system_t::SYSCR1

char st_system_t::wk0[4]


char st_system_t::wk1[2]


char st_system_t::wk10[28]


char st_system_t::wk11[1]
```

char st_system_t::wk12[28]

char st_system_t::wk13[794]

char st_system_t::wk14[3100]

char st_system_t::wk15[45667]

char st_system_t::wk16[1]

char st_system_t::wk17[2]

char st_system_t::wk18[1]

char st_system_t::wk19[2]

char st_system_t::wk2[2]

char st_system_t::wk20[1]

char st_system_t::wk21[4]

char st_system_t::wk3[5]

char st_system_t::wk4[1]

char st_system_t::wk5[4]


char st_system_t::wk6[1]

```
char st_system_t::wk7[2]
```

```
char st_system_t::wk8[2]
```


```
char st_system_t::wk9[84]
```

```
#include <iodefine.h>
```

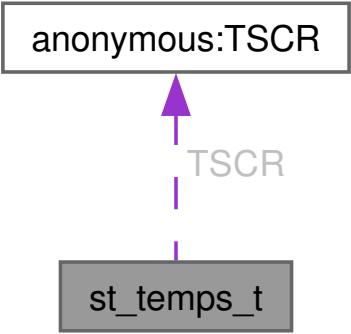

```
union { ... } st_temps_t::TSCR
```

```
#include <iodef.h>
```

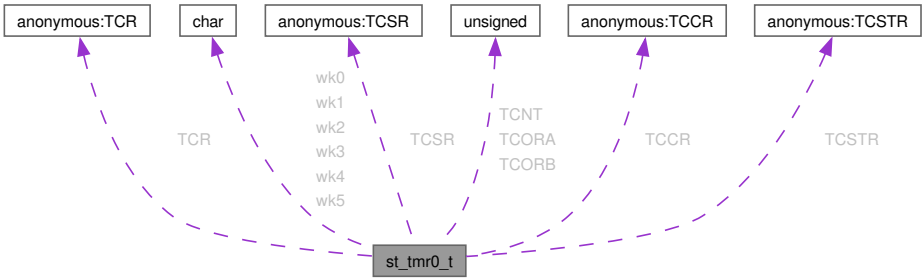

union { ... } st_tmr0_t::TCCR

unsigned char st_tmr0_t::TCNT

unsigned char st_tmr0_t::TCORA

unsigned char st_tmr0_t::TCORB

union { ... } st_tmr0_t::TCR

union { ... } st_tmr0_t::TCSR

union { ... } st_tmr0_t::TCSTR

char st_tmr0_t::wk0[1]

char st_tmr0_t::wk1[1]


char st_tmr0_t::wk2[1]

```
char st_tmr_t::wk3[1]
```

```
char st_tmr_t::wk4[1]
```

```
char st_tmr_t::wk5[1]
```

```
#include <iodef.h>
```

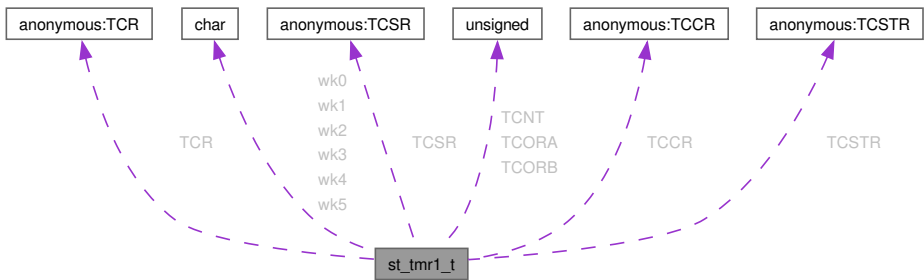

```
union { ... } st_tmr1_t::TCCR
```

unsigned char st_tmr1_t::TCNT

unsigned char st_tmr1_t::TCORA

unsigned char st_tmr1_t::TCORB

union { ... } st_tmr1_t::TCR

union { ... } st_tmr1_t::TCSR

union { ... } st_tmr1_t::TCSTR

char st_tmr1_t::wk0[1]

char st_tmr1_t::wk1[1]


char st_tmr1_t::wk2[1]

char st_tmr1_t::wk3[1]

char st_tmr1_t::wk4[1]

char st_tmr1_t::wk5[1]

```
#include <iodef.h>
```

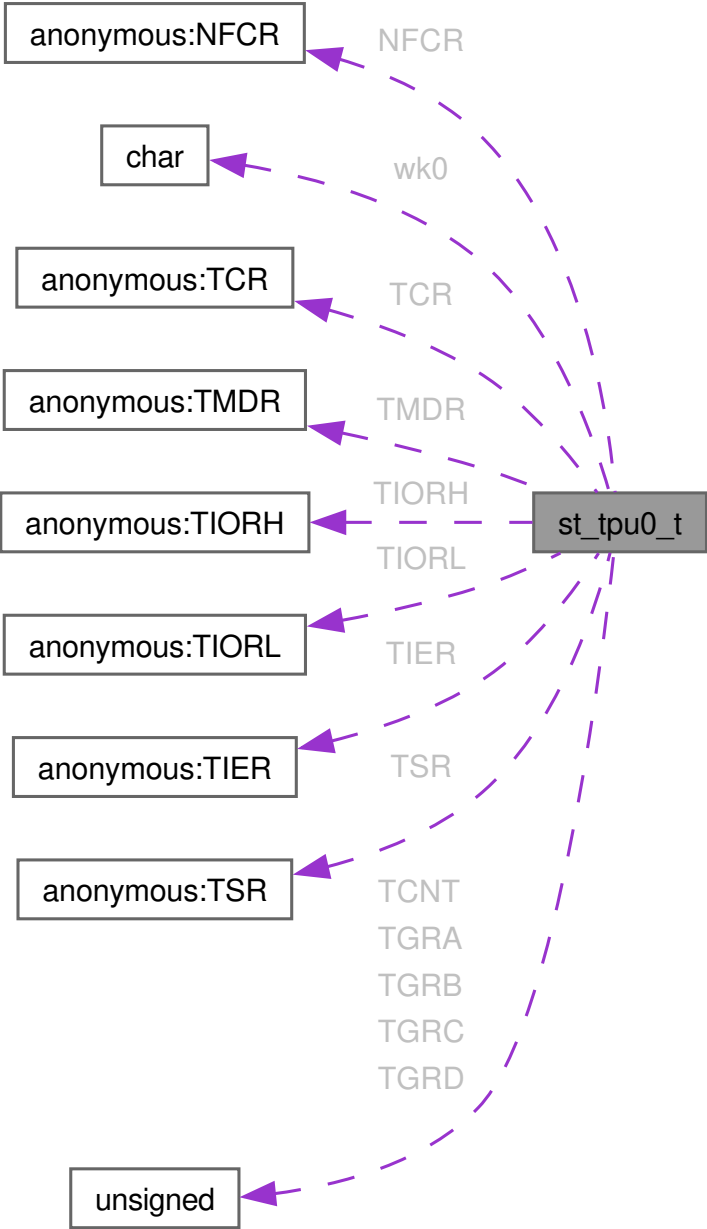

union { ... } st_tpu0_t::NFCR

unsigned short st_tpu0_t::TCNT

union { ... } st_tpu0_t::TCR

unsigned short st_tpu0_t::TGRA

unsigned short st_tpu0_t::TGRB

unsigned short st_tpu0_t::TGRC

unsigned short st_tpu0_t::TGRD

union { ... } st_tpu0_t::TIER

union { ... } st_tpu0_t::TIORH


union { ... } st_tpu0_t::TIORL

```
union { ... } st_tpu0_t::TMDR
```

```
union { ... } st_tpu0_t::TSR
```

```
char st_tpu0_t::wk0[7]
```

```
#include <iodef.h>
```

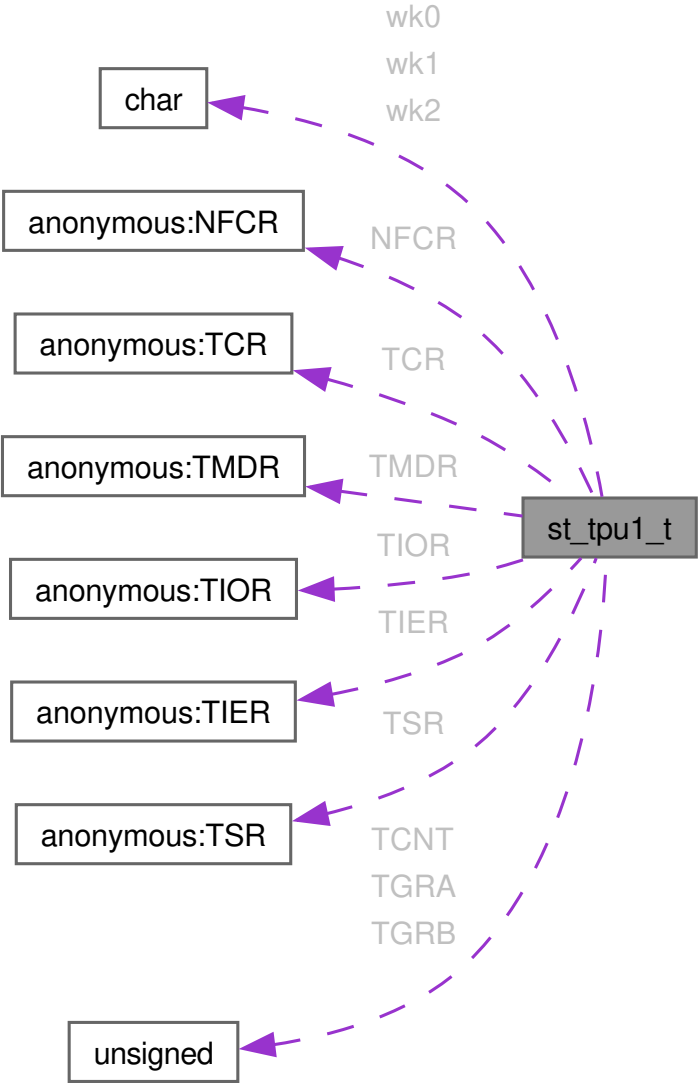

union { ... } st_tpu1_t::NFCR

unsigned short st_tpu1_t::TCNT

union { ... } st_tpu1_t::TCR

unsigned short st_tpu1_t::TGRA

unsigned short st_tpu1_t::TGRB

union { ... } st_tpu1_t::TIER

union { ... } st_tpu1_t::TIOR

union { ... } st_tpu1_t::TMDR


union { ... } st_tpu1_t::TSR

char st_tpu1_t::wk0[1]

char st_tpu1_t::wk1[22]

char st_tpu1_t::wk2[1]

```
#include <iodef.h>
```

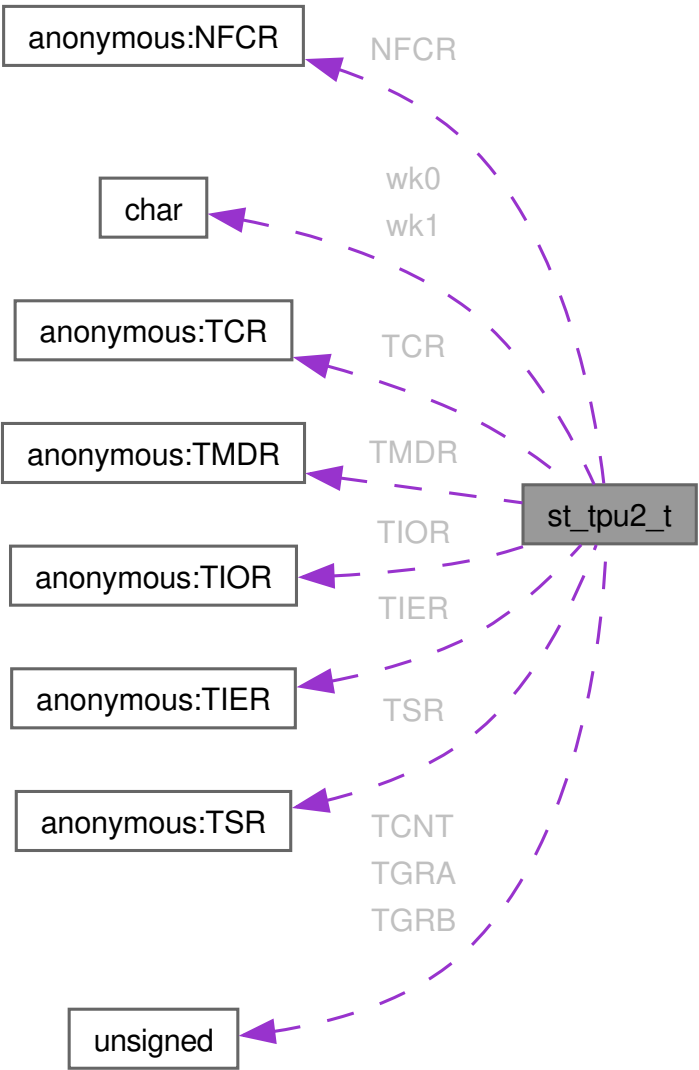

union { ... } st_tpu2_t::NFCR

unsigned short st_tpu2_t::TCNT

union { ... } st_tpu2_t::TCR

unsigned short st_tpu2_t::TGRA

unsigned short st_tpu2_t::TGRB

union { ... } st_tpu2_t::TIER

union { ... } st_tpu2_t::TIOR


union { ... } st_tpu2_t::TMDR

union { ... } st_tpu2_t::TSR

char st_tpu2_t::wk0[37]

char st_tpu2_t::wk1[1]

```
#include <iodef.h>
```

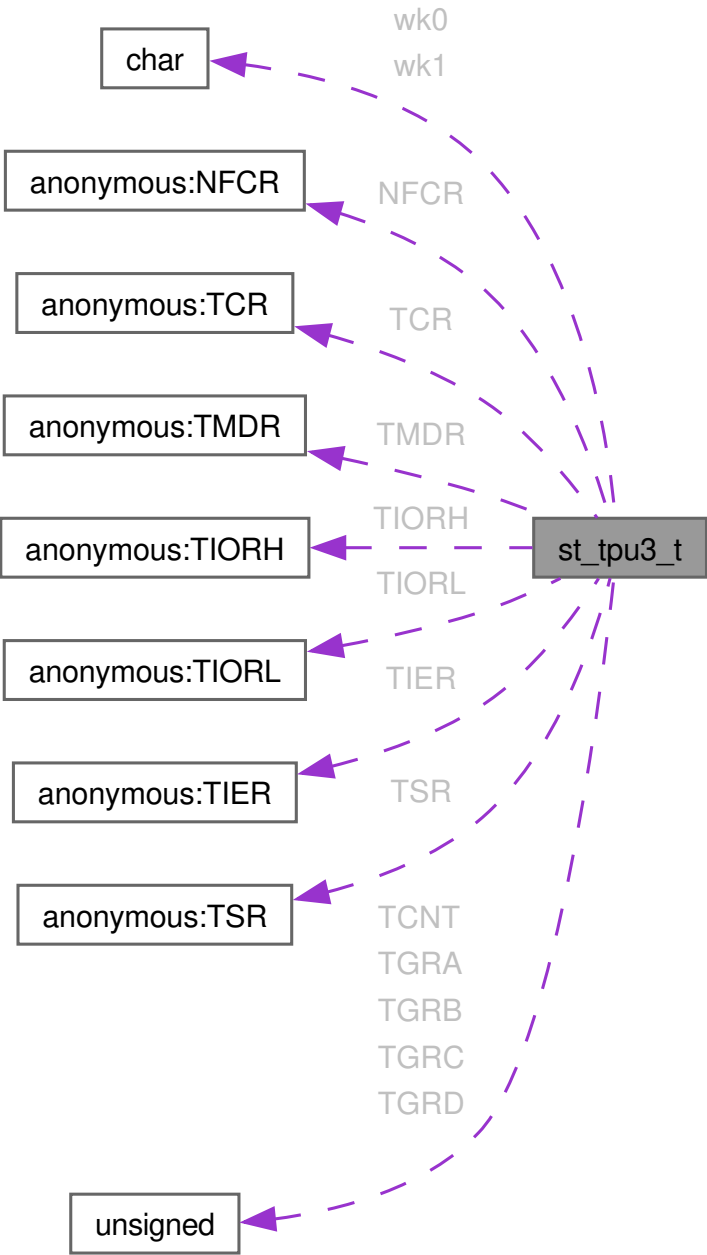

union { ... } st_tpu3_t::NFCR

unsigned short st_tpu3_t::TCNT

union { ... } st_tpu3_t::TCR

unsigned short st_tpu3_t::TGRA

unsigned short st_tpu3_t::TGRB

unsigned short st_tpu3_t::TGRC

unsigned short st_tpu3_t::TGRD

union { ... } st_tpu3_t::TIER

union { ... } st_tpu3_t::TIORH

union { ... } st_tpu3_t::TIORL


union { ... } st_tpu3_t::TMDR

union { ... } st_tpu3_t::TSR

char st_tpu3_t::wk0[1]

```
char st_tpu3_t::wk1[52]
```

```
#include <iodef.h>
```

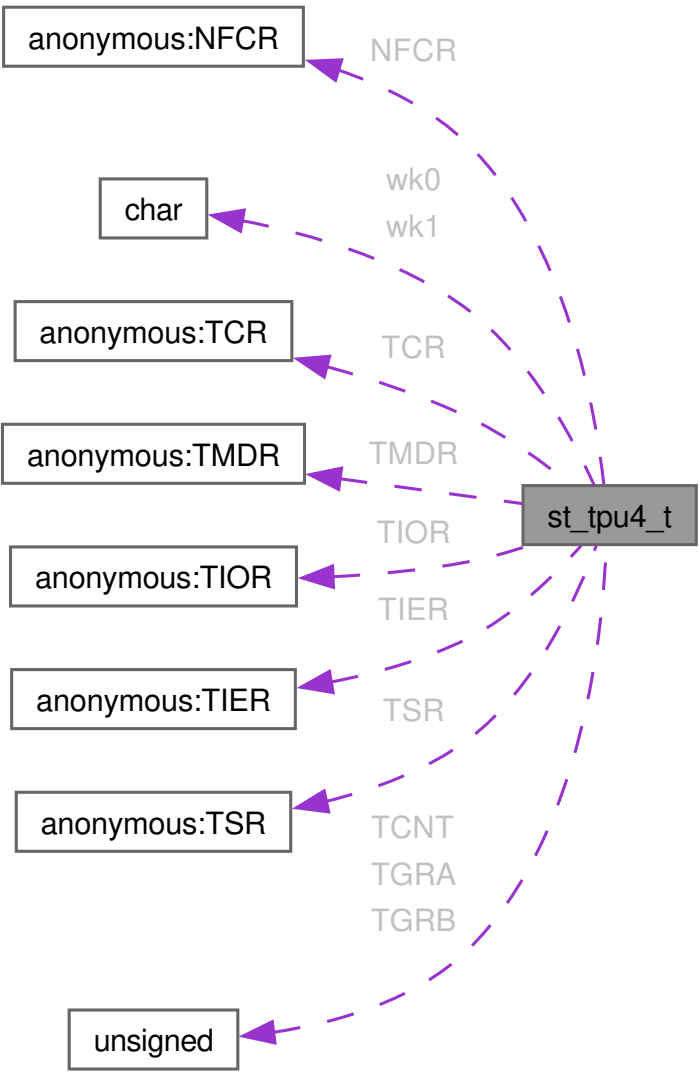

unsigned short st_tpu4_t::TCNT

union { ... } st_tpu4_t::TCR

unsigned short st_tpu4_t::TGRA

unsigned short st_tpu4_t::TGRB

union { ... } st_tpu4_t::TIER

union { ... } st_tpu4_t::TIOR


union { ... } st_tpu4_t::TMDR

union { ... } st_tpu4_t::TSR

char st_tpu4_t::wk0[67]

char st_tpu4_t::wk1[1]

```
#include <iodef.h>
```

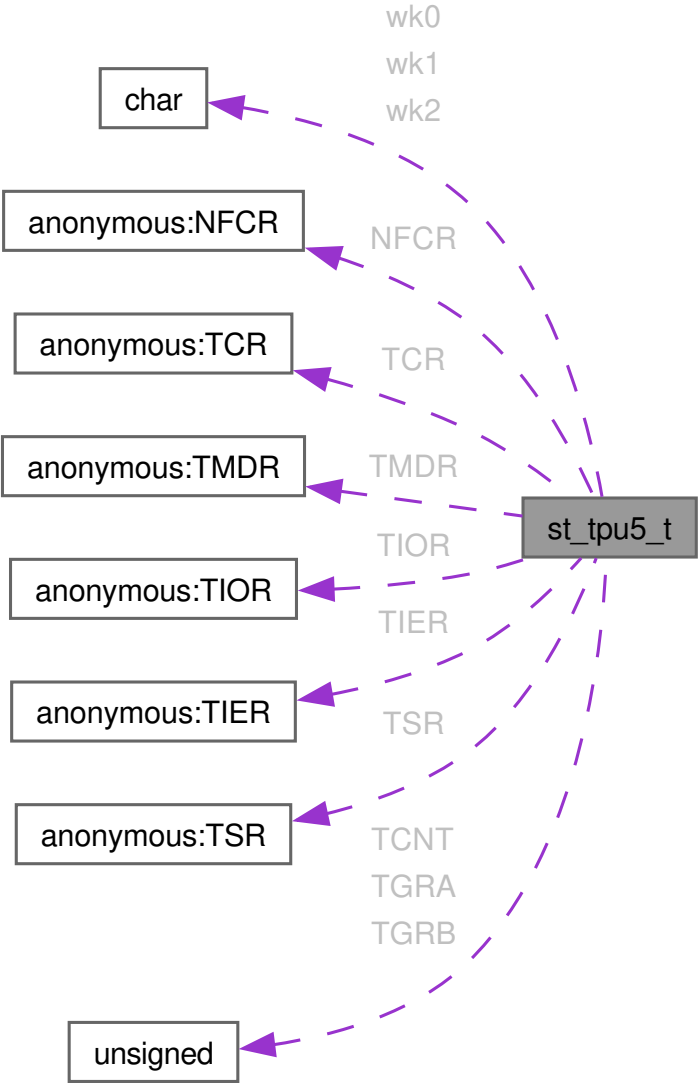

union { ... } st_tpu5_t::NFCR

unsigned short st_tpu5_t::TCNT

union { ... } st_tpu5_t::TCR

unsigned short st_tpu5_t::TGRA

unsigned short st_tpu5_t::TGRB

union { ... } st_tpu5_t::TIER

union { ... } st_tpu5_t::TIOR

union { ... } st_tpu5_t::TMDR


union { ... } st_tpu5_t::TSR

char st_tpu5_t::wk0[1]

char st_tpu5_t::wk1[82]

char st_tpu5_t::wk2[1]

```
#include <iodefine.h>
```

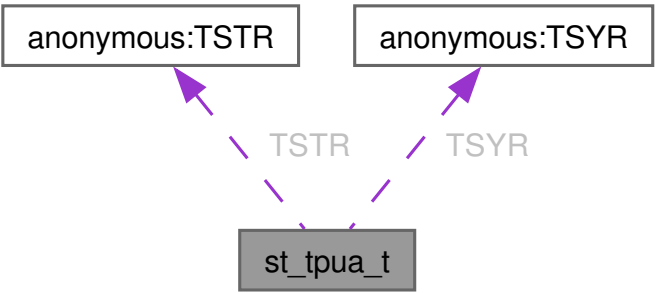

```
union { ... } st_tpua_t::TSTR  
union { ... } st_tpua_t::TSYR
```

union { ... } st_usb0_t::BEMPENB

union { ... } st_usb0_t::BEMPSTS

union { ... } st_usb0_t::BRDYENB

union { ... } st_usb0_t::BRDYSTS

union { ... } st_usb0_t::CFIFO

union { ... } st_usb0_t::CFIFOCTR

union { ... } st_usb0_t::CFIFOSEL

union { ... } st_usb0_t::D0FIFO

union { ... } st_usb0_t::D0FIFOCTR

union { ... } st_usb0_t::D0FIFOSEL

union { ... } st_usb0_t::D1FIFO

union { ... } st_usb0_t::D1FIFOCTR

union { ... } st_usb0_t::D1FIFOSEL

union { ... } st_usb0_t::DCPCFG

union { ... } st_usb0_t::DCPCTR

union { ... } st_usb0_t::DCPMAXP

union { ... } st_usb0_t::DEVADD0

union { ... } st_usb0_t::DEVADD1

union { ... } st_usb0_t::DEVADD2

union { ... } st_usb0_t::DEVADD3

union { ... } st_usb0_t::DEVADD4

union { ... } st_usb0_t::DEVADD5

union { ... } st_usb0_t::DVCHGR

union { ... } st_usb0_t::DVSTCTR0

union { ... } st_usb0_t::FRMNUM

union { ... } st_usb0_t::INTENB0

union { ... } st_usb0_t::INTENB1

union { ... } st_usb0_t::INTSTS0

union { ... } st_usb0_t::INTSTS1

union { ... } st_usb0_t::NRDYENB

union { ... } st_usb0_t::NRDYSTS

union { ... } st_usb0_t::PHYSLEW

union { ... } st_usb0_t::PIPE1CTR

union { ... } st_usb0_t::PIPE1TRE

unsigned short st_usb0_t::PIPE1TRN

union { ... } st_usb0_t::PIPE2CTR

union { ... } st_usb0_t::PIPE2TRE

unsigned short st_usb0_t::PIPE2TRN

union { ... } st_usb0_t::PIPE3CTR

union { ... } st_usb0_t::PIPE3TRE

unsigned short st_usb0_t::PIPE3TRN

union { ... } st_usb0_t::PIPE4CTR

union { ... } st_usb0_t::PIPE4TRE

unsigned short st_usb0_t::PIPE4TRN

union { ... } st_usb0_t::PIPE5CTR

union { ... } st_usb0_t::PIPE5TRE

unsigned short st_usb0_t::PIPE5TRN

union { ... } st_usb0_t::PIPE6CTR

union { ... } st_usb0_t::PIPE7CTR

union { ... } st_usb0_t::PIPE8CTR

union { ... } st_usb0_t::PIPE9CTR

union { ... } st_usb0_t::PIPECFG

union { ... } st_usb0_t::PIPEMAXP

union { ... } st_usb0_t::PIPEPERI

union { ... } st_usb0_t::PIPESEL

union { ... } st_usb0_t::SOFCFG

union { ... } st_usb0_t::SYSCFG

union { ... } st_usb0_t::SYSSTS0

union { ... } st_usb0_t::USBADDR

unsigned short st_usb0_t::USBINDX

unsigned short st_usb0_t::USBLENG

union { ... } st_usb0_t::USBREQ

unsigned short st_usb0_t::USBVAL

char st_usb0_t::wk0[2]

char st_usb0_t::wk1[2]

char st_usb0_t::wk10[2]

char st_usb0_t::wk11[2]

char st_usb0_t::wk12[2]

char st_usb0_t::wk13[2]

char st_usb0_t::wk14[14]

char st_usb0_t::wk15[44]

char st_usb0_t::wk16[20]

char st_usb0_t::wk2[10]

char st_usb0_t::wk3[2]

char st_usb0_t::wk4[2]

char st_usb0_t::wk5[2]


char st_usb0_t::wk6[4]

char st_usb0_t::wk7[2]

char st_usb0_t::wk8[2]

char st_usb0_t::wk9[2]


```
#include <iodefine.h>
```

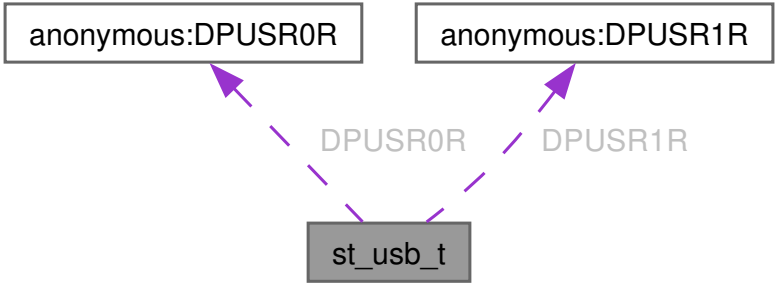

```
union { ... } st_usb_t::DPUSR0R
```

```
union { ... } st_usb_t::DPUSR1R
```

```
#include <iodef.h>
```

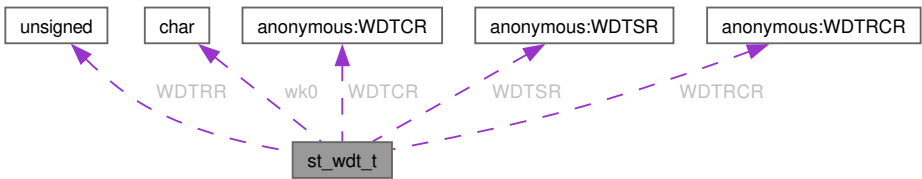


```
union { ... } st_wdt_t::WDTCR
```

```
union { ... } st_wdt_t::WDTRCR
```

```
unsigned char st_wdt_t::WDTRR
```

```
union { ... } st_wdt_t::WDTSR  
char st_wdt_t::wk0[1]
```

```
#include <stdint.h>  
#include "iodefine.h"
```

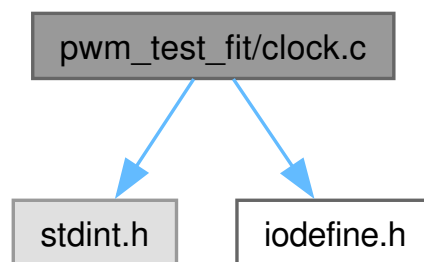

>>

```
#define MEMWAIT_ADDR (0x0008101CU)
```


```
#define PACKCR_ADDR (0x00080044U)
```

```
#define PRCR_KEY_LOCK ((uint16_t)0xA500U)
```

```
#define PRCR_KEY_UNLOCK_PRC0_PRC1 ((uint16_t)0xA503U)
```

```
void clock_init (  
    void )
```


```
00034 {  
00035     volatile uint16_t * const prcr = (volatile uint16_t *)&SYSTEM.PRCR.WORD;  
00036     volatile uint8_t * const memwait = (volatile uint8_t *)MEMWAIT_ADDR;  
00037     volatile uint16_t * const packcr = (volatile uint16_t *)PACKCR_ADDR;  
00038  
00039     /* Unlock PRC0 (clock) + PRC1 (module stop). */  
00040     *prcr = PRCR_KEY_UNLOCK_PRC0_PRC1;  
00041  
00042     /* Start HOCO. */  
00043     SYSTEM.HOCOCR.BYTE = 0x00U;  
00044     while (SYSTEM.OSCOVFSR.BIT.HCOVF == 0U) { __asm__ volatile("nop"); }  
00045  
00046     /* PLL: HOCO 16 MHz / 1 * 12 = 192 MHz (PLIDIV=00, PLLSRCSEL=1, STC=23). */  
00047     SYSTEM.PLLCR.WORD = 0x1710U;  
00048     SYSTEM.PLLCR2.BYTE = 0x00U;  
00049     while (SYSTEM.OSCOVFSR.BIT.PLOVF == 0U) { __asm__ volatile("nop"); }  
00050  
00051     /* MEMWAIT = 1 (required for ICLK > 120 MHz; harmless for us). */  
00052     *memwait = 0x01U;  
00053  
00054     /* SCKCR: FCK=/4, ICK=/2, PSTOP1=1, PSTOP0=1, BCK=/4,  
00055      *      PCKA=/2 (96 MHz), PCKB=/4 (48 MHz), PCKC=/2, PCKD=/2. */  
00056     SYSTEM.SCKCR.LONG = 0x21C21211U;  
00057  
00058     /* UPLLSEL = 0 : route UCLK divider input from main PLL. */  
00059     *packcr = 0x0000U;  
00060  
00061     /* SCKCR2: UCK = /4 (48 MHz), bits [3:0] reserved = 1. */  
00062     SYSTEM.SCKCR2.WORD = 0x0031U;  
00063  
00064     /* SCKCR3: select PLL as system clock source. */  
00065     SYSTEM.SCKCR3.WORD = 0x0400U;  
00066  
00067     /* Relock PRCR. */  
00068     *prcr = PRCR_KEY_LOCK;  
00069 }
```



```

00001 /**
00002  * @file clock.c
00003  * @brief RX72N clock init using Renesas iodefne.h register structs.
00004  *
00005  * HOCO 16 MHz -> PLL 192 -> ICLK 96 MHz, PCKA 96 MHz, PCKB 48 MHz.
00006  * Identical register writes to pwm_test/clock.c but via iodefne.h instead
00007  * of STAR's rx72n_regs.h. This lets us share the same iodefne with the
00008  * GPTW-bringup code in main.c and guarantees addresses/bitfields come
00009  * straight from the authoritative Renesas BSP.
00010  *
00011  * No external crystal -- HOCO is the PLL source.
00012  *
00013  * SPDX-License-Identifier: MIT
00014  * @copyright Copyright (c) 2026 Locked Inc.
00015  */
00016
00017 #include <stdint.h>
00018
00019 #include "iodefne.h"
00020
00021 /* PRCR key/enable constants (PRCR is a 16-bit write-only control register
00022  * and cannot be expressed via the iodefne bitfield union on writes). */
00023 #define PRCR_KEY_UNLOCK_PRC0_PRC1 ((uint16_t)0xA503U)
00024 #define PRCR_KEY_LOCK ((uint16_t)0xA500U)
00025
00026 /* PACKCR is not modeled as a standalone field in iodefne; address from manual. */
00027 #define PACKCR_ADDR (0x00080044U)
00028
00029 /* MEMWAIT address and value (used for ICLK > 120 MHz). Our ICLK is 96 MHz
00030  * so this write is defensive; replicate pwm_test/clock.c for determinism. */
00031 #define MEMWAIT_ADDR (0x0008101CU)
00032
00033 void clock_init(void)
00034 {
00035     volatile uint16_t * const prcr = (volatile uint16_t *)&SYSTEM.PRCR.WORD;
00036     volatile uint8_t * const memwait = (volatile uint8_t *)MEMWAIT_ADDR;
00037     volatile uint16_t * const packcr = (volatile uint16_t *)PACKCR_ADDR;
00038
00039     /* Unlock PRC0 (clock) + PRC1 (module stop). */
00040     *prcr = PRCR_KEY_UNLOCK_PRC0_PRC1;
00041
00042     /* Start HOCO. */
00043     SYSTEM.HOCOCR.BYTE = 0x00U;
00044     while (SYSTEM.OSCOVFSR.BIT.HCOVF == 0U) { __asm__ volatile("nop"); }
00045
00046     /* PLL: HOCO 16 MHz / 1 * 12 = 192 MHz (PLIDIV=00, PLLSRCSEL=1, STC=23). */
00047     SYSTEM.PLLCR.WORD = 0x1710U;
00048     SYSTEM.PLLCR2.BYTE = 0x00U;
00049     while (SYSTEM.OSCOVFSR.BIT.PLOVF == 0U) { __asm__ volatile("nop"); }
00050
00051     /* MEMWAIT = 1 (required for ICLK > 120 MHz; harmless for us). */
00052     *memwait = 0x01U;
00053
00054     /* SCKCR: FCK=/4, ICK=/2, PSTOP1=1, PSTOP0=1, BCK=/4,
00055      * PCKA=/2 (96 MHz), PCKB=/4 (48 MHz), PCKC=/2, PCKD=/2. */
00056     SYSTEM.SCKCR.LONG = 0x21C21211U;
00057
00058     /* UPLLSEL = 0 : route UCLK divider input from main PLL. */
00059     *packcr = 0x0000U;
00060
00061     /* SCKCR2: UCK = /4 (48 MHz), bits [3:0] reserved = 1. */
00062     SYSTEM.SCKCR2.WORD = 0x0031U;
00063
00064     /* SCKCR3: select PLL as system clock source. */
00065     SYSTEM.SCKCR3.WORD = 0x0400U;
00066
00067     /* Relock PRCR. */
00068     *prcr = PRCR_KEY_LOCK;
00069 }

```

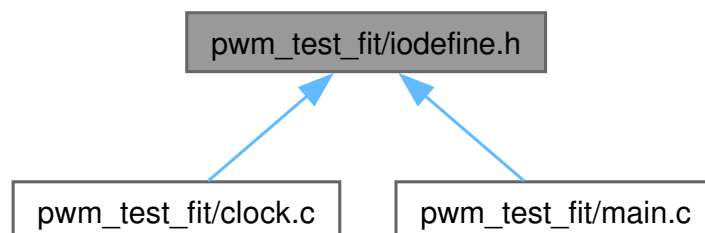

[illegible]

[illegible]

[illegible]

unsigned



TCCR

TCNT

TCORA

TCORB



st_tmr01_t

unsigned



UIDR0

UIDR1


UIDR2

UIDR3



st_flashconst_t

--	--	--



--	--	--

[illegible]

[illegible]

--	--	--	--

--	--	--

--	--	--	--

--	--	--

--	--	--

[illegible][illegible]

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

[illegible]

--	--	--	--

--	--	--

--	--	--

--	--	--	--

--	--	--

--	--	--

[illegible]

--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--

[illegible]

--	--	--

--	--	--

[illegible]

[illegible][illegible]

[illegible][illegible]

[illegible]

[illegible]

[illegible][illegible]

[illegible][illegible]

[illegible]

[illegible]

--	--	--

--	--	--







--	--	--







--	--	--

--	--	--

--	--	--

--	--	--





--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--







--	--	--







--	--	--

--	--	--

--	--	--

--	--	--





[illegible]

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

[illegible]

[illegible]

--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--

--	--	--

--	--	--

[illegible]

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--	--

[illegible]

[illegible][illegible][illegible]

[illegible][illegible]

--	--	--	--

[illegible][illegible][illegible]

[illegible][illegible]

[illegible][illegible][illegible]

[illegible][illegible]

--	--	--	--

--	--	--	--

[illegible][illegible][illegible]

--	--	--	--

[illegible]

--	--	--

--	--	--

[illegible][illegible][illegible]

--	--	--	--

--	--	--

--	--	--

--	--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

[illegible][illegible]

--	--	--	--

--	--	--

--	--	--

--	--	--

--	--	--

[illegible]

--	--	--	--

[illegible]

[illegible]

--	--	--	--

--	--	--	--

--	--	--	--

--	--	--

--	--	--

--	--	--

[illegible]

[illegible][illegible]

--	--	--

--	--	--

--	--	--

--	--	--

--	--	--	--








--	--	--	--

--	--	--

--	--	--

--	--	--	--

--	--	--



#define __CLR(
x)

ICU.GCR ## x.BIT.CLR ## x

```
#define __DTCE(  
    x)
```

```
ICU.DTCER[ DTCE ## x ].BIT.DTCE
```

```
#define __EN(  
    x)
```

```
ICU.GEN ## x.BIT.EN ## x
```

```
#define __IEN(  
    x)
```

```
ICU.IER[ IER ## x ].BIT.IEN ## x
```

```
#define __IPR(  
    x)
```

```
ICU.IPR[ IPR ## x ].BIT.IPR
```

```
#define __IR(  
    x)
```

```
ICU.IR[ IR ## x ].BIT.IR
```

```
#define __IS(  
    x)
```

```
ICU.GRP ## x.BIT.IS ## x
```

```
#define __MSTP(  
    x)
```

```
MSTP ## x
```

```
#define __VECT(  
    x)
```

```
VECT ## x
```

```
#define _CLR(  
    x)
```

```
__CLR( x )
```

```
#define _DTCE(  
    x)
```

```
__DTCE( x )
```

```
#define _EN(  
    x)
```

```
__EN( x )
```

```
#define _IEN(  
    x)
```

```
__IEN( x )
```

```
#define _IPR(  
    x)
```

```
__IPR( x )
```

```
#define _IR(  
    x)
```

```
__IR( x )
```

```
#define __IS(  
    x)
```

```
__IS( x )
```

```
#define __MSTP(  
    x)
```

```
__MSTP( x )
```

```
#define __VECT(  
    x)
```

```
__VECT( x )
```

```
#define BSC (*(volatile struct st_bsc *)0x81300)
```

```
#define CAC (*(volatile struct st_cac *)0x8B000)
```

```
#define CAN0 (*(volatile struct st_can *)0x90200)
```

```
#define CAN1 (*(volatile struct st_can *)0x91200)
```

```
#define CAN2 (*(volatile struct st_can *)0x92200)
```

```
#define CLR(  
    x,  
    y)
```

```
__CLR( __ ## x ## __ ## y )
```

```
#define CLR_CAN0_ERS0 CLR0
```

```
#define CLR_CAN1_ERS1 CLR1
```

```
#define CLR_CAN2_ERS2 CLR2
```

```
#define CLR_DPFPUP_DPFPUEX CLR0
```

```
#define CMT (*(volatile struct st_cmt *)0x88000)
```

```
#define CMT0 (*(volatile struct st_cmt0 *)0x88002)
```

```
#define CMT1 (*(volatile struct st_cmt0 *)0x88008)
```

```
#define CMT2 (*(volatile struct st_cmt0 *)0x88012)
```

```
#define CMT3 (*(volatile struct st_cmt0 *)0x88018)
```

```
#define CMTW0 (*(volatile struct st_cmtw *)0x94200)
```

```
#define CMTW1 (*(volatile struct st_cmtw *)0x94280)
```

```
#define CRC (*(volatile struct st_crc *)0x88280)
```

```
#define DA (*(volatile struct st_da *)0x88040)
```

```
#define DMAC (*(volatile struct st_dmac *)0x82200)
```

```
#define DMAC0 (*(volatile struct st_dmac0 *)0x82000)
```

```
#define DMAC1 (*(volatile struct st_dmac1 *)0x82040)
```

```
#define DMAC2 (*(volatile struct st_dmac1 *)0x82080)
```

```
#define DMAC3 (*(volatile struct st_dmac1 *)0x820C0)
```

```
#define DMAC4 (*(volatile struct st_dmac1 *)0x82100)
```

```
#define DMAC5 (*(volatile struct st_dmac1 *)0x82140)
```

```
#define DMAC6 (*(volatile struct st_dmac1 *)0x82180)
```

```
#define DMAC7 (*(volatile struct st_dmac1 *)0x821C0)
```

```
#define DOC (*(volatile struct st_doc *)0x8B080)
```

```
#define DRW2D (*(volatile struct st_drw2d *)0xE3000)
```

```
#define DTC (*(volatile struct st_dtc *)0x82400)
```

```
#define DTCE(  
    x,  
    y)
```

```
__DTCE( __ ## x ## __ ## y )
```

```
#define ECCRAM (*(volatile struct st_eccram *)0x812C0)
```

```
#define EDMAC0 (*(volatile struct st_edmac *)0xC0000)
```

```
#define EDMAC1 (*(volatile struct st_edmac *)0xC0200)
```

```
#define ELC (*(volatile struct st_elc *)0x8B100)
```

```
#define EN(
```

```
    x,  
    y)
```

```
__EN( __ ## x ## __ ## y )
```

```
#define EN_CAC_FERRI EN26
```

```
#define EN_CAC_MENDI EN27
```

```
#define EN_CAC_OVFI EN28
```

```
#define EN_CAN0_ERS0 EN0
```

```
#define EN_CAN1_ERS1 EN1
```

```
#define EN_CAN2_ERS2 EN2
```

```
#define EN_DOC_DOPCI EN29
```

```
#define EN_DPFPU_DPFPUEx EN0
```

```
#define EN_DRW2D_DRWIRQ EN11
```

```
#define EN_EDMAC0_EINT0 EN4
```

```
#define EN_EDMAC1_EINT1 EN5
```

```
#define EN_EPTPC_MINT EN0
```

```
#define EN_GLCDC_GR1UF EN9
```

#define EN_GLCDC_GR2UF EN10

#define EN_GLCDC_VPOS EN8

#define EN_MMCIF_ACCIO EN8

#define EN_MMCIF_CDETIO EN6

#define EN_MMCIF_ERRIO EN7

#define EN_PDC_PCERI EN31

#define EN_PDC_PCFEI EN30

#define EN_POE3_OEI1 EN9

#define EN_POE3_OEI2 EN10

#define EN_POE3_OEI3 EN11

#define EN_POE3_OEI4 EN12

#define EN_POEG_POEGGAI EN7

#define EN_POEG_POEGGBI EN8

#define EN_POEG_POEGGCI EN9

#define EN_POEG_POEGGDI EN10

#define EN_PTPEDMAC_PINT EN1

#define EN_QSPI_QSPSLI EN24

#define EN_RIIC0_EEI0 EN14

#define EN_RIIC0_TEI0 EN13

#define EN_RIIC1_EEI1 EN29

#define EN_RIIC1_TEI1 EN28

#define EN_RIIC2_EEI2 EN16

#define EN_RIIC2_TEI2 EN15

#define EN_RSPI0_SPEI0 EN17

#define EN_RSPI0_SPII0 EN16

#define EN_RSPI1_SPEI1 EN19

#define EN_RSPI1_SPII1 EN18

#define EN_RSPI2_SPEI2 EN21

#define EN_RSPI2_SPII2 EN20

#define EN_S12AD1_S12CMPAI1 EN22

```
#define EN_S12AD1_S12CMPBI1 EN23
```

```
#define EN_S12AD_S12CMPAI EN20
```

```
#define EN_S12AD_S12CMPBI EN21
```

```
#define EN_SCI0_ERI0 EN1
```

```
#define EN_SCI0_TEI0 EN0
```

```
#define EN_SCI10_ERI10 EN9
```

```
#define EN_SCI10_TEI10 EN8
```

```
#define EN_SCI11_ERI11 EN13
```

```
#define EN_SCI11_TEI11 EN12
```

```
#define EN_SCI12_ERI12 EN17
```

```
#define EN_SCI12_SCIX0 EN18
```

```
#define EN_SCI12_SCIX1 EN19
```

```
#define EN_SCI12_SCIX2 EN20
```

```
#define EN_SCI12_SCIX3 EN21
```

```
#define EN_SCI12_TEI12 EN16
```

#define EN_SCI1_ERI1 EN3

#define EN_SCI1_TEI1 EN2

#define EN_SCI2_ERI2 EN5

#define EN_SCI2_TEI2 EN4

#define EN_SCI3_ERI3 EN7

#define EN_SCI3_TEI3 EN6

#define EN_SCI4_ERI4 EN9

#define EN_SCI4_TEI4 EN8

#define EN_SCI5_ERI5 EN11

#define EN_SCI5_TEI5 EN10

#define EN_SCI6_ERI6 EN13

#define EN_SCI6_TEI6 EN12

#define EN_SCI7_ERI7 EN23

#define EN_SCI7_TEI7 EN22

#define EN_SCI8_ERI8 EN1

```
#define EN_SCI8_TEI8 EN0
```

```
#define EN_SCI9_ERI9 EN5
```

```
#define EN_SCI9_TEI9 EN4
```

```
#define EN_SDHI_CACI EN4
```

```
#define EN_SDHI_CDETI EN3
```

```
#define EN_SDHI_SDACI EN5
```

```
#define EN_SSIE0_SSIF0 EN17
```

```
#define EN_SSIE1_SSIF1 EN18
```

```
#define EPTPC (*(volatile struct st_eptpc *)0xC0500)
```

```
#define EPTPC0 (*(volatile struct st_eptpc0 *)0xC4800)
```

```
#define EPTPC1 (*(volatile struct st_eptpc0 *)0xC4C00)
```

```
#define ETHERC0 (*(volatile struct st_etherc *)0xC0100)
```

```
#define ETHERC1 (*(volatile struct st_etherc *)0xC0300)
```

```
#define EXDMAC (*(volatile struct st_exdmac *)0x82A00)
```

```
#define EXDMAC0 (*(volatile struct st_exdmac0 *)0x82800)
```

```
#define EXDMAC1 (*(volatile struct st_exdmac1 *)0x82840)
```

```
#define FLASH (*(volatile struct st_flash *)0x81000)
```

```
#define FLASHCONST (*(volatile struct st_flashconst *)0xFE7F7D90)
```

```
#define GCR_CAN0_ERS0 GCRBE0
```

```
#define GCR_CAN1_ERS1 GCRBE0
```

```
#define GCR_CAN2_ERS2 GCRBE0
```

```
#define GCR_DPFPU_DPFPUEX GCRIE0
```

```
#define GEN_CAC_FERRI GENBL0
```

```
#define GEN_CAC_MENDI GENBL0
```

```
#define GEN_CAC_OVFI GENBL0
```

```
#define GEN_CAN0_ERS0 GENBE0
```

```
#define GEN_CAN1_ERS1 GENBE0
```

```
#define GEN_CAN2_ERS2 GENBE0
```

```
#define GEN_DOC_DOPCI GENBL0
```

```
#define GEN_DPFPU_DPFPUEX GENIE0
```

```
#define GEN_DRW2D_DRWIRQ GENAL1
```

```
#define GEN_EDMAC0_EINT0 GENAL1
```

```
#define GEN_EDMAC1_EINT1 GENAL1
```

```
#define GEN_EPTPC_MINT GENAL1
```

```
#define GEN_GLCDC_GR1UF GENAL1
```

```
#define GEN_GLCDC_GR2UF GENAL1
```

```
#define GEN_GLCDC_VPOS GENAL1
```

```
#define GEN_MMCIF_ACCIO GENBL1
```

```
#define GEN_MMCIF_CDETIO GENBL1
```

```
#define GEN_MMCIF_ERRIO GENBL1
```

```
#define GEN_PDC_PCERI GENBL0
```

```
#define GEN_PDC_PCFEI GENBL0
```

```
#define GEN_POE3_OEI1 GENBL1
```

```
#define GEN_POE3_OEI2 GENBL1
```

```
#define GEN_POE3_OEI3 GENBL1
```

```
#define GEN_POE3_OEI4 GENBL1
```

```
#define GEN_POEG_POEGGAI GENBL2
```

```
#define GEN_POEG_POEGGBI GENBL2
```

```
#define GEN_POEG_POEGGCI GENBL2
```

```
#define GEN_POEG_POEGGDI GENBL2
```

```
#define GEN_PTPEDMAC_PINT GENAL1
```

```
#define GEN_QSPI_QSPSLI GENBL0
```

```
#define GEN_RIIC0_EEI0 GENBL1
```

```
#define GEN_RIIC0_TEI0 GENBL1
```

```
#define GEN_RIIC1_EEI1 GENBL1
```

```
#define GEN_RIIC1_TEI1 GENBL1
```

```
#define GEN_RIIC2_EEI2 GENBL1
```

```
#define GEN_RIIC2_TEI2 GENBL1
```

```
#define GEN_RSPI0_SPEI0 GENAL0
```

```
#define GEN_RSPI0_SPII0 GENAL0
```

```
#define GEN_RSPI1_SPEI1 GENAL0
```

```
#define GEN_RSPI1_SPII1 GENAL0
```

```
#define GEN_RSPI2_SPEI2 GENAL0
```

```
#define GEN_RSPI2_SPII2 GENAL0
```

```
#define GEN_S12AD1_S12CMPAI1 GENBL1
```

```
#define GEN_S12AD1_S12CMPBI1 GENBL1
```

```
#define GEN_S12AD_S12CMPAI GENBL1
```

```
#define GEN_S12AD_S12CMPBI GENBL1
```

```
#define GEN_SCI0_ERI0 GENBL0
```

```
#define GEN_SCI0_TEI0 GENBL0
```

```
#define GEN_SCI10_ERI10 GENAL0
```

```
#define GEN_SCI10_TEI10 GENAL0
```

```
#define GEN_SCI11_ERI11 GENAL0
```

```
#define GEN_SCI11_TEI11 GENAL0
```

```
#define GEN_SCI12_ERI12 GENBL0
```

```
#define GEN_SCI12_SCIX0 GENBL0
```

```
#define GEN_SCI12_SCIX1 GENBL0
```

```
#define GEN_SCI12_SCIX2 GENBL0
```

```
#define GEN_SCI12_SCIX3 GENBL0
```

```
#define GEN_SCI12_TEI12 GENBL0
```

```
#define GEN_SCI1_ERI1 GENBL0
```

```
#define GEN_SCI1_TEI1 GENBL0
```

```
#define GEN_SCI2_ERI2 GENBL0
```

```
#define GEN_SCI2_TEI2 GENBL0
```

```
#define GEN_SCI3_ERI3 GENBL0
```

```
#define GEN_SCI3_TEI3 GENBL0
```

```
#define GEN_SCI4_ERI4 GENBL0
```

```
#define GEN_SCI4_TEI4 GENBL0
```

```
#define GEN_SCI5_ERI5 GENBL0
```

```
#define GEN_SCI5_TEI5 GENBL0
```

```
#define GEN_SCI6_ERI6 GENBL0
```

```
#define GEN_SCI6_TEI6 GENBL0
```

```
#define GEN_SCI7_ERI7 GENAL0
```

```
#define GEN_SCI7_TEI7 GENAL0
```

```
#define GEN_SCI8_ERI8 GENAL0
```

```
#define GEN_SCI8_TEI8 GENAL0
```

```
#define GEN_SCI9_ERI9 GENAL0
```

```
#define GEN_SCI9_TEI9 GENAL0
```

```
#define GEN_SDHI_CACI GENBL1
```

```
#define GEN_SDHI_CDETI GENBL1
```

```
#define GEN_SDHI_SDACI GENBL1
```

```
#define GEN_SSIE0_SSIF0 GENBL1
```

```
#define GEN_SSIE1_SSIF1 GENBL1
```

```
#define GLCDC (*(volatile struct st_glcdc *)0xE0000)
```

```
#define GPTW0 (*(volatile struct st_gptw *)0xC2000)
```

```
#define GPTW1 (*(volatile struct st_gptw *)0xC2100)
```

```
#define GPTW2 (*(volatile struct st_gptw *)0xC2200)
```

```
#define GPTW3 (*(volatile struct st_gptw *)0xC2300)
```

```
#define GRP_CAC_FERRI GRPBL0
```

```
#define GRP_CAC_MENDI GRPBL0
```

```
#define GRP_CAC_OVFI GRPBL0
```

```
#define GRP_CAN0_ERS0 GRPBEO
```

```
#define GRP_CAN1_ERS1 GRPBEO
```

```
#define GRP_CAN2_ERS2 GRPBEO
```

```
#define GRP_DOC_DOPCI GRPBL0
```

```
#define GRP_DPFPUP_DPFPUEX GRPIEO
```

```
#define GRP_DRW2D_DRWIRQ GRPAL1
```

```
#define GRP_EDMAC0_EINT0 GRPAL1
```

#define GRP_EDMAC1_EINT1 GRPAL1

#define GRP_EPTPC_MINT GRPAL1

#define GRP_GLCDC_GR1UF GRPAL1

#define GRP_GLCDC_GR2UF GRPAL1

#define GRP_GLCDC_VPOS GRPAL1

#define GRP_MMCIF_ACCIO GRPBL1

#define GRP_MMCIF_CDETIO GRPBL1

#define GRP_MMCIF_ERRIO GRPBL1

#define GRP_PDC_PCERI GRPBL0

#define GRP_PDC_PCFEI GRPBL0

#define GRP_POE3_OEI1 GRPBL1

#define GRP_POE3_OEI2 GRPBL1

#define GRP_POE3_OEI3 GRPBL1

#define GRP_POE3_OEI4 GRPBL1

#define GRP_POEG_POEGGAI GRPBL2

#define GRP_POEG_POEGGBI GRPBL2

#define GRP_POEG_POEGGCI GRPBL2

#define GRP_POEG_POEGGDI GRPBL2

#define GRP_PTPEDMAC_PINT GRPAL1

#define GRP_QSPI_QSPSLI GRPBL0

#define GRP_RIIC0_EEI0 GRPBL1

#define GRP_RIIC0_TEI0 GRPBL1

#define GRP_RIIC1_EEI1 GRPBL1

#define GRP_RIIC1_TEI1 GRPBL1

#define GRP_RIIC2_EEI2 GRPBL1

#define GRP_RIIC2_TEI2 GRPBL1

#define GRP_RSPI0_SPEI0 GRPAL0

#define GRP_RSPI0_SPII0 GRPAL0

#define GRP_RSPI1_SPEI1 GRPAL0

#define GRP_RSPI1_SPII1 GRPAL0

```
#define GRP_RSPI2_SPEI2 GRPAL0
```

```
#define GRP_RSPI2_SPII2 GRPAL0
```

```
#define GRP_S12AD1_S12CMPAI1 GRPBL1
```

```
#define GRP_S12AD1_S12CMPBI1 GRPBL1
```

```
#define GRP_S12AD_S12CMPAI GRPBL1
```

```
#define GRP_S12AD_S12CMPBI GRPBL1
```

```
#define GRP_SCI0_ERI0 GRPBL0
```

```
#define GRP_SCI0_TEI0 GRPBL0
```

```
#define GRP_SCI10_ERI10 GRPAL0
```

```
#define GRP_SCI10_TEI10 GRPAL0
```

```
#define GRP_SCI11_ERI11 GRPAL0
```

```
#define GRP_SCI11_TEI11 GRPAL0
```

```
#define GRP_SCI12_ERI12 GRPBL0
```

```
#define GRP_SCI12_SCIX0 GRPBL0
```

```
#define GRP_SCI12_SCIX1 GRPBL0
```

```
#define GRP_SCI12_SCIX2 GRPBL0
```

```
#define GRP_SCI12_SCIX3 GRPBL0
```

```
#define GRP_SCI12_TEI12 GRPBL0
```

```
#define GRP_SCI1_ERI1 GRPBL0
```

```
#define GRP_SCI1_TEI1 GRPBL0
```

```
#define GRP_SCI2_ERI2 GRPBL0
```

```
#define GRP_SCI2_TEI2 GRPBL0
```

```
#define GRP_SCI3_ERI3 GRPBL0
```

```
#define GRP_SCI3_TEI3 GRPBL0
```

```
#define GRP_SCI4_ERI4 GRPBL0
```

```
#define GRP_SCI4_TEI4 GRPBL0
```

```
#define GRP_SCI5_ERI5 GRPBL0
```

```
#define GRP_SCI5_TEI5 GRPBL0
```

```
#define GRP_SCI6_ERI6 GRPBL0
```

```
#define GRP_SCI6_TEI6 GRPBL0
```

```
#define GRP_SCI7_ERI7 GRPAL0
```

```
#define GRP_SCI7_TEI7 GRPAL0
```

```
#define GRP_SCI8_ERI8 GRPAL0
```

```
#define GRP_SCI8_TEI8 GRPAL0
```

```
#define GRP_SCI9_ERI9 GRPAL0
```

```
#define GRP_SCI9_TEI9 GRPAL0
```

```
#define GRP_SDHI_CACI GRPBL1
```

```
#define GRP_SDHI_CDETI GRPBL1
```

```
#define GRP_SDHI_SDACI GRPBL1
```

```
#define GRP_SSIE0_SSIF0 GRPBL1
```

```
#define GRP_SSIE1_SSIF1 GRPBL1
```

```
#define ICU (*(volatile struct st_icu *)0x87000)
```

```
#define IEN(  
    x,  
    y)
```

```
_IEN( _ ## x ## _ ## y )
```

```
#define IEN_BSC_BUSERR IEN0
```

```
#define IEN_CMT0_CMI0 IEN4
```

```
#define IEN_CMT1_CMI1 IEN5
```

```
#define IEN_CMTW0_CMWI0 IEN6
```

```
#define IEN_CMTW1_CMWI1 IEN7
```

```
#define IEN_DMAC_DMAC0I IEN0
```

```
#define IEN_DMAC_DMAC1I IEN1
```

```
#define IEN_DMAC_DMAC2I IEN2
```

```
#define IEN_DMAC_DMAC3I IEN3
```

```
#define IEN_DMAC_DMAC74I IEN4
```

```
#define IEN_EXDMAC_EXDMAC0I IEN6
```

```
#define IEN_EXDMAC_EXDMAC1I IEN7
```

```
#define IEN_FCU_FIFERR IEN5
```

```
#define IEN_FCU_FRDYI IEN7
```

```
#define IEN_ICU_GROUPAL0 IEN0
```

```
#define IEN_ICU_GROUPAL1 IEN1
```

```
#define IEN_ICU_GROUPBE0 IEN2
```

```
#define IEN_ICU_GROUPBL0 IEN6
```

```
#define IEN_ICU_GROUPBL1 IEN7
```

```
#define IEN_ICU_GROUPBL2 IEN3
```

```
#define IEN_ICU_GROUPIE0 IEN1
```

```
#define IEN_ICU_IRQ0 IEN0
```

```
#define IEN_ICU_IRQ1 IEN1
```

```
#define IEN_ICU_IRQ10 IEN2
```

```
#define IEN_ICU_IRQ11 IEN3
```

```
#define IEN_ICU_IRQ12 IEN4
```

```
#define IEN_ICU_IRQ13 IEN5
```

```
#define IEN_ICU_IRQ14 IEN6
```

```
#define IEN_ICU_IRQ15 IEN7
```

```
#define IEN_ICU_IRQ2 IEN2
```

```
#define IEN_ICU_IRQ3 IEN3
```

```
#define IEN_ICU_IRQ4 IEN4
```

```
#define IEN_ICU_IRQ5 IEN5
```

```
#define IEN_ICU_IRQ6 IEN6
```

```
#define IEN_ICU_IRQ7 IEN7
```

```
#define IEN_ICU_IRQ8 IEN0
```

```
#define IEN_ICU_IRQ9 IEN1
```

```
#define IEN_ICU_SWINT IEN3
```

```
#define IEN_ICU_SWINT2 IEN2
```

```
#define IEN_IWDT_IWUNI IEN7
```

```
#define IEN_LVD1_LVD1 IEN0
```

```
#define IEN_LVD2_LVD2 IEN1
```

```
#define IEN_MMCIF_MBFAI IEN5
```

```
#define IEN_OST_OSTDI IEN5
```

```
#define IEN_PDC_PCDFI IEN1
```

```
#define IEN_PERIA_INTA208 IEN0
```

#define IEN_PERIA_INTA209 IEN1

#define IEN_PERIA_INTA210 IEN2

#define IEN_PERIA_INTA211 IEN3

#define IEN_PERIA_INTA212 IEN4

#define IEN_PERIA_INTA213 IEN5

#define IEN_PERIA_INTA214 IEN6

#define IEN_PERIA_INTA215 IEN7

#define IEN_PERIA_INTA216 IEN0

#define IEN_PERIA_INTA217 IEN1

#define IEN_PERIA_INTA218 IEN2

#define IEN_PERIA_INTA219 IEN3

#define IEN_PERIA_INTA220 IEN4

#define IEN_PERIA_INTA221 IEN5

#define IEN_PERIA_INTA222 IEN6

#define IEN_PERIA_INTA223 IEN7

```
#define IEN_PERIA_INTA224 IEN0
```

```
#define IEN_PERIA_INTA225 IEN1
```

```
#define IEN_PERIA_INTA226 IEN2
```

```
#define IEN_PERIA_INTA227 IEN3
```

```
#define IEN_PERIA_INTA228 IEN4
```

```
#define IEN_PERIA_INTA229 IEN5
```

```
#define IEN_PERIA_INTA230 IEN6
```

```
#define IEN_PERIA_INTA231 IEN7
```

```
#define IEN_PERIA_INTA232 IEN0
```

```
#define IEN_PERIA_INTA233 IEN1
```

```
#define IEN_PERIA_INTA234 IEN2
```

```
#define IEN_PERIA_INTA235 IEN3
```

```
#define IEN_PERIA_INTA236 IEN4
```

```
#define IEN_PERIA_INTA237 IEN5
```

```
#define IEN_PERIA_INTA238 IEN6
```

```
#define IEN_PERIA_INTA239 IEN7
```

```
#define IEN_PERIA_INTA240 IEN0
```

```
#define IEN_PERIA_INTA241 IEN1
```

```
#define IEN_PERIA_INTA242 IEN2
```

```
#define IEN_PERIA_INTA243 IEN3
```

```
#define IEN_PERIA_INTA244 IEN4
```

```
#define IEN_PERIA_INTA245 IEN5
```

```
#define IEN_PERIA_INTA246 IEN6
```

```
#define IEN_PERIA_INTA247 IEN7
```

```
#define IEN_PERIA_INTA248 IEN0
```

```
#define IEN_PERIA_INTA249 IEN1
```

```
#define IEN_PERIA_INTA250 IEN2
```

```
#define IEN_PERIA_INTA251 IEN3
```

```
#define IEN_PERIA_INTA252 IEN4
```

```
#define IEN_PERIA_INTA253 IEN5
```

```
#define IEN_PERIA_INTA254 IEN6
```

```
#define IEN_PERIA_INTA255 IEN7
```

```
#define IEN_PERIB_INTB128 IEN0
```

```
#define IEN_PERIB_INTB129 IEN1
```

```
#define IEN_PERIB_INTB130 IEN2
```

```
#define IEN_PERIB_INTB131 IEN3
```

```
#define IEN_PERIB_INTB132 IEN4
```

```
#define IEN_PERIB_INTB133 IEN5
```

```
#define IEN_PERIB_INTB134 IEN6
```

```
#define IEN_PERIB_INTB135 IEN7
```

```
#define IEN_PERIB_INTB136 IEN0
```

```
#define IEN_PERIB_INTB137 IEN1
```

```
#define IEN_PERIB_INTB138 IEN2
```

```
#define IEN_PERIB_INTB139 IEN3
```

```
#define IEN_PERIB_INTB140 IEN4
```

```
#define IEN_PERIB_INTB141 IEN5
```

```
#define IEN_PERIB_INTB142 IEN6
```

```
#define IEN_PERIB_INTB143 IEN7
```

```
#define IEN_PERIB_INTB144 IEN0
```

```
#define IEN_PERIB_INTB145 IEN1
```

```
#define IEN_PERIB_INTB146 IEN2
```

```
#define IEN_PERIB_INTB147 IEN3
```

```
#define IEN_PERIB_INTB148 IEN4
```

```
#define IEN_PERIB_INTB149 IEN5
```

```
#define IEN_PERIB_INTB150 IEN6
```

```
#define IEN_PERIB_INTB151 IEN7
```

```
#define IEN_PERIB_INTB152 IEN0
```

```
#define IEN_PERIB_INTB153 IEN1
```

```
#define IEN_PERIB_INTB154 IEN2
```

```
#define IEN_PERIB_INTB155 IEN3
```

```
#define IEN_PERIB_INTB156 IEN4
```

```
#define IEN_PERIB_INTB157 IEN5
```

```
#define IEN_PERIB_INTB158 IEN6
```

```
#define IEN_PERIB_INTB159 IEN7
```

```
#define IEN_PERIB_INTB160 IEN0
```

```
#define IEN_PERIB_INTB161 IEN1
```

```
#define IEN_PERIB_INTB162 IEN2
```

```
#define IEN_PERIB_INTB163 IEN3
```

```
#define IEN_PERIB_INTB164 IEN4
```

```
#define IEN_PERIB_INTB165 IEN5
```

```
#define IEN_PERIB_INTB166 IEN6
```

```
#define IEN_PERIB_INTB167 IEN7
```

```
#define IEN_PERIB_INTB168 IEN0
```

```
#define IEN_PERIB_INTB169 IEN1
```

```
#define IEN_PERIB_INTB170 IEN2
```

```
#define IEN_PERIB_INTB171 IEN3
```

```
#define IEN_PERIB_INTB172 IEN4
```

```
#define IEN_PERIB_INTB173 IEN5
```

```
#define IEN_PERIB_INTB174 IEN6
```

```
#define IEN_PERIB_INTB175 IEN7
```

```
#define IEN_PERIB_INTB176 IEN0
```

```
#define IEN_PERIB_INTB177 IEN1
```

```
#define IEN_PERIB_INTB178 IEN2
```

```
#define IEN_PERIB_INTB179 IEN3
```

```
#define IEN_PERIB_INTB180 IEN4
```

```
#define IEN_PERIB_INTB181 IEN5
```

```
#define IEN_PERIB_INTB182 IEN6
```

```
#define IEN_PERIB_INTB183 IEN7
```

```
#define IEN_PERIB_INTB184 IEN0
```

```
#define IEN_PERIB_INTB185 IEN1
```

```
#define IEN_PERIB_INTB186 IEN2
```

```
#define IEN_PERIB_INTB187 IEN3
```

```
#define IEN_PERIB_INTB188 IEN4
```

```
#define IEN_PERIB_INTB189 IEN5
```

```
#define IEN_PERIB_INTB190 IEN6
```

```
#define IEN_PERIB_INTB191 IEN7
```

```
#define IEN_PERIB_INTB192 IEN0
```

```
#define IEN_PERIB_INTB193 IEN1
```

```
#define IEN_PERIB_INTB194 IEN2
```

```
#define IEN_PERIB_INTB195 IEN3
```

```
#define IEN_PERIB_INTB196 IEN4
```

```
#define IEN_PERIB_INTB197 IEN5
```

```
#define IEN_PERIB_INTB198 IEN6
```

```
#define IEN_PERIB_INTB199 IEN7
```

```
#define IEN_PERIB_INTB200 IEN0
```

```
#define IEN_PERIB_INTB201 IEN1
```

```
#define IEN_PERIB_INTB202 IEN2
```

```
#define IEN_PERIB_INTB203 IEN3
```

```
#define IEN_PERIB_INTB204 IEN4
```

```
#define IEN_PERIB_INTB205 IEN5
```

```
#define IEN_PERIB_INTB206 IEN6
```

```
#define IEN_PERIB_INTB207 IEN7
```

```
#define IEN_QSPI_SPRI IEN2
```

```
#define IEN_QSPI_SPTI IEN3
```

```
#define IEN_RAM_RAMERR IEN2
```

```
#define IEN_RIIC0_RXI0 IEN4
```

```
#define IEN_RIIC0_TXI0 IEN5
```

```
#define IEN_RIIC1_RXI1 IEN2
```

```
#define IEN_RIIC1_TXI1 IEN3
```

```
#define IEN_RIIC2_RXI2 IEN6
```

```
#define IEN_RIIC2_TXI2 IEN7
```

```
#define IEN_RSPI0_SPRI0 IEN6
```

```
#define IEN_RSPI0_SPTI0 IEN7
```

```
#define IEN_RSPI1_SPRI1 IEN0
```

```
#define IEN_RSPI1_SPTI1 IEN1
```

```
#define IEN_RSPI2_SPRI2 IEN4
```

```
#define IEN_RSPI2_SPTI2 IEN5
```

```
#define IEN_RTC_ALM IEN4
```

```
#define IEN_RTC_PRD IEN5
```

```
#define IEN_SCI0_RXI0 IEN2
```

```
#define IEN_SCI0_TXI0 IEN3
```

```
#define IEN_SCI10_RXI10 IEN0
```

```
#define IEN_SCI10_TXI10 IEN1
```

```
#define IEN_SCI11_RXI11 IEN2
```

```
#define IEN_SCI11_TXI11 IEN3
```

```
#define IEN_SCI12_RXI12 IEN4
```

```
#define IEN_SCI12_TXI12 IEN5
```

```
#define IEN_SCI1_RXI1 IEN4
```

```
#define IEN_SCI1_TXI1 IEN5
```

```
#define IEN_SCI2_RXI2 IEN6
```

```
#define IEN_SCI2_TXI2 IEN7
```

```
#define IEN_SCI3_RXI3 IEN0
```

```
#define IEN_SCI3_TXI3 IEN1
```

```
#define IEN_SCI4_RXI4 IEN2
```

```
#define IEN_SCI4_TXI4 IEN3
```

```
#define IEN_SCI5_RXI5 IEN4
```

```
#define IEN_SCI5_TXI5 IEN5
```

```
#define IEN_SCI6_RXI6 IEN6
```

```
#define IEN_SCI6_TXI6 IEN7
```

```
#define IEN_SCI7_RXI7 IEN2
```

```
#define IEN_SCI7_TXI7 IEN3
```

```
#define IEN_SCI8_RXI8 IEN4
```

```
#define IEN_SCI8_TXI8 IEN5
```

```
#define IEN_SCI9_RXI9 IEN6
```

```
#define IEN_SCI9_TXI9 IEN7
```

```
#define IEN_SDHI_SBFBI IEN4
```

```
#define IEN_SSIE0_SSIRXI0 IEN7
```

```
#define IEN_SSIE0_SSITXI0 IEN6
```

```
#define IEN_SSIE1_SSIRTI1 IEN0
```

```
#define IEN_USB0_D0FIFO0 IEN2
```

```
#define IEN_USB0_D1FIFO0 IEN3
```

```
#define IEN_USB0_USBR0 IEN2
```

```
#define IEN_WDT_WUNI IEN0
```

```
#define IPR(  
    x,  
    y)
```

```
_IPR( _ ## x ## _ ## y )
```

```
#define IR(
```

```
    x,  
    y)
```

```
_IR( _ ## x ## _ ## y )
```

```
#define IS(
```

```
    x,  
    y)
```

```
_IS( _ ## x ## _ ## y )
```

```
#define IS_CAC_FERRI IS26
```

```
#define IS_CAC_MENDI IS27
```

```
#define IS_CAC_OVFI IS28
```

```
#define IS_CAN0_ERS0 IS0
```

```
#define IS_CAN1_ERS1 IS1
```

```
#define IS_CAN2_ERS2 IS2
```

```
#define IS_DOC_DOPCI IS29
```

```
#define IS_DPFPD_DPFPD IS0
```

```
#define IS_DRW2D_DRWIRQ IS11
```

```
#define IS_EDMAC0_EINT0 IS4
```

#define IS_EDMAC1_EINT1 IS5

#define IS_EPTPC_MINT IS0

#define IS_GLCDC_GR1UF IS9

#define IS_GLCDC_GR2UF IS10

#define IS_GLCDC_VPOS IS8

#define IS_MMCIF_ACCIO IS8

#define IS_MMCIF_CDETIO IS6

#define IS_MMCIF_ERRIO IS7

#define IS_PDC_PCERI IS31

#define IS_PDC_PCFEI IS30

#define IS_POE3_OEI1 IS9

#define IS_POE3_OEI2 IS10

#define IS_POE3_OEI3 IS11

#define IS_POE3_OEI4 IS12

#define IS_POEG_POEGGAI IS7

#define IS_POEG_POEGGBI IS8

#define IS_POEG_POEGGCI IS9

#define IS_POEG_POEGGDI IS10

#define IS_PTPEDMAC_PINT IS1

#define IS_QSPI_QSPSLI IS24

#define IS_RIIC0_EEI0 IS14

#define IS_RIIC0_TEI0 IS13

#define IS_RIIC1_EEI1 IS29

#define IS_RIIC1_TEI1 IS28

#define IS_RIIC2_EEI2 IS16

#define IS_RIIC2_TEI2 IS15

#define IS_RSPI0_SPEI0 IS17

#define IS_RSPI0_SPII0 IS16

#define IS_RSPI1_SPEI1 IS19

#define IS_RSPI1_SPII1 IS18

```
#define IS_RSPI2_SPEI2 IS21
```

```
#define IS_RSPI2_SPII2 IS20
```

```
#define IS_S12AD1_S12CMPAI1 IS22
```

```
#define IS_S12AD1_S12CMPBI1 IS23
```

```
#define IS_S12AD_S12CMPAI IS20
```

```
#define IS_S12AD_S12CMPBI IS21
```

```
#define IS_SCI0_ERI0 IS1
```

```
#define IS_SCI0_TEI0 IS0
```

```
#define IS_SCI10_ERI10 IS9
```

```
#define IS_SCI10_TEI10 IS8
```

```
#define IS_SCI11_ERI11 IS13
```

```
#define IS_SCI11_TEI11 IS12
```

```
#define IS_SCI12_ERI12 IS17
```

```
#define IS_SCI12_SCIX0 IS18
```

```
#define IS_SCI12_SCIX1 IS19
```

#define IS_SCI12_SCIX2 IS20

#define IS_SCI12_SCIX3 IS21

#define IS_SCI12_TEI12 IS16

#define IS_SCI1_ERI1 IS3

#define IS_SCI1_TEI1 IS2

#define IS_SCI2_ERI2 IS5

#define IS_SCI2_TEI2 IS4

#define IS_SCI3_ERI3 IS7

#define IS_SCI3_TEI3 IS6

#define IS_SCI4_ERI4 IS9

#define IS_SCI4_TEI4 IS8

#define IS_SCI5_ERI5 IS11

#define IS_SCI5_TEI5 IS10

#define IS_SCI6_ERI6 IS13

#define IS_SCI6_TEI6 IS12

```
#define IS_SCI7_ERI7 IS23
```

```
#define IS_SCI7_TEI7 IS22
```

```
#define IS_SCI8_ERI8 IS1
```

```
#define IS_SCI8_TEI8 IS0
```

```
#define IS_SCI9_ERI9 IS5
```

```
#define IS_SCI9_TEI9 IS4
```

```
#define IS_SDHI_CACI IS4
```

```
#define IS_SDHI_CDETI IS3
```

```
#define IS_SDHI_SDACI IS5
```

```
#define IS_SSIE0_SSIF0 IS17
```

```
#define IS_SSIE1_SSIF1 IS18
```

```
#define IWDT (*(volatile struct st_iwdt *)0x88030)
```

```
#define MMCIF (*(volatile struct st_mmcif *)0x88500)
```

```
#define MPC (*(volatile struct st_mpc *)0x8C100)
```

```
#define MPU (*(volatile struct st_mpu *)0x86400)
```

```
#define MSTP(  
    x)
```

```
_MSTP( _ ## x )
```

```
#define MSTP_CAC SYSTEM.MSTPCRC.BIT.MSTPC19
```

```
#define MSTP_CAN0 SYSTEM.MSTPCRB.BIT.MSTPB0
```

```
#define MSTP_CAN1 SYSTEM.MSTPCRB.BIT.MSTPB1
```

```
#define MSTP_CAN2 SYSTEM.MSTPCRB.BIT.MSTPB2
```

```
#define MSTP_CMT0 SYSTEM.MSTPCRA.BIT.MSTPA15
```

```
#define MSTP_CMT1 SYSTEM.MSTPCRA.BIT.MSTPA15
```

```
#define MSTP_CMT2 SYSTEM.MSTPCRA.BIT.MSTPA14
```

```
#define MSTP_CMT3 SYSTEM.MSTPCRA.BIT.MSTPA14
```

```
#define MSTP_CMTW0 SYSTEM.MSTPCRA.BIT.MSTPA1
```

```
#define MSTP_CMTW1 SYSTEM.MSTPCRA.BIT.MSTPA0
```

```
#define MSTP_CRC SYSTEM.MSTPCRB.BIT.MSTPB23
```

#define MSTP_DA SYSTEM.MSTPCRA.BIT.MSTPA19

#define MSTP_DMAC SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC0 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC1 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC2 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC3 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC4 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC5 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC6 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DMAC7 SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_DOC SYSTEM.MSTPCRB.BIT.MSTPB6

#define MSTP_DRW2D SYSTEM.MSTPCRC.BIT.MSTPC28

#define MSTP_DTC SYSTEM.MSTPCRA.BIT.MSTPA28

#define MSTP_ECCRAM SYSTEM.MSTPCRC.BIT.MSTPC6

#define MSTP_EDMAC0 SYSTEM.MSTPCRB.BIT.MSTPB15

#define MSTP_EDMAC1 SYSTEM.MSTPCRB.BIT.MSTPB14

#define MSTP_ELC SYSTEM.MSTPCRB.BIT.MSTPB9

#define MSTP_EPTPC SYSTEM.MSTPCRB.BIT.MSTPB13

#define MSTP_EPTPC0 SYSTEM.MSTPCRB.BIT.MSTPB13

#define MSTP_EPTPC1 SYSTEM.MSTPCRB.BIT.MSTPB13

#define MSTP_ETHERC0 SYSTEM.MSTPCRB.BIT.MSTPB15

#define MSTP_ETHERC1 SYSTEM.MSTPCRB.BIT.MSTPB14

#define MSTP_EXDMAC SYSTEM.MSTPCRA.BIT.MSTPA29

#define MSTP_EXDMAC0 SYSTEM.MSTPCRA.BIT.MSTPA29

#define MSTP_EXDMAC1 SYSTEM.MSTPCRA.BIT.MSTPA29

#define MSTP_GLCDC SYSTEM.MSTPCRC.BIT.MSTPC29

#define MSTP_GPTW SYSTEM.MSTPCRA.BIT.MSTPA7

#define MSTP_GPTW0 SYSTEM.MSTPCRA.BIT.MSTPA7

#define MSTP_GPTW1 SYSTEM.MSTPCRA.BIT.MSTPA7

#define MSTP_GPTW2 SYSTEM.MSTPCRA.BIT.MSTPA7

```
#define MSTP_GPTW3 SYSTEM.MSTPCRA.BIT.MSTPA7
```

```
#define MSTP_MMCIF SYSTEM.MSTPCRD.BIT.MSTPD21
```

```
#define MSTP_MTU SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU0 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU1 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU2 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU3 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU4 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU5 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU6 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU7 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_MTU8 SYSTEM.MSTPCRA.BIT.MSTPA9
```

```
#define MSTP_PDC SYSTEM.MSTPCRB.BIT.MSTPB22
```

```
#define MSTP_PMG10 SYSTEM.MSTPCRB.BIT.MSTPB15
```

```
#define MSTP_PMG11 SYSTEM.MSTPCRB.BIT.MSTPB14
```

#define MSTP_POEG SYSTEM.MSTPCRA.BIT.MSTPA7

#define MSTP_PPG0 SYSTEM.MSTPCRA.BIT.MSTPA11

#define MSTP_PPG1 SYSTEM.MSTPCRA.BIT.MSTPA10

#define MSTP_PTPEDMAC SYSTEM.MSTPCRB.BIT.MSTPB13

#define MSTP_QSPI SYSTEM.MSTPCRC.BIT.MSTPC23

#define MSTP_RAM0 SYSTEM.MSTPCRC.BIT.MSTPC0

#define MSTP_RAM2 SYSTEM.MSTPCRC.BIT.MSTPC2

#define MSTP_RIIC0 SYSTEM.MSTPCRB.BIT.MSTPB21

#define MSTP_RIIC1 SYSTEM.MSTPCRB.BIT.MSTPB20

#define MSTP_RIIC2 SYSTEM.MSTPCRC.BIT.MSTPC17

#define MSTP_RSPI0 SYSTEM.MSTPCRB.BIT.MSTPB17

#define MSTP_RSPI1 SYSTEM.MSTPCRB.BIT.MSTPB16

#define MSTP_RSPI2 SYSTEM.MSTPCRC.BIT.MSTPC22

#define MSTP_S12AD SYSTEM.MSTPCRA.BIT.MSTPA17

#define MSTP_S12AD1 SYSTEM.MSTPCRA.BIT.MSTPA16

#define MSTP_SCI0 SYSTEM.MSTPCRB.BIT.MSTPB31

#define MSTP_SCI1 SYSTEM.MSTPCRB.BIT.MSTPB30

#define MSTP_SCI10 SYSTEM.MSTPCRC.BIT.MSTPC25

#define MSTP_SCI11 SYSTEM.MSTPCRC.BIT.MSTPC24

#define MSTP_SCI12 SYSTEM.MSTPCRB.BIT.MSTPB4

#define MSTP_SCI2 SYSTEM.MSTPCRB.BIT.MSTPB29

#define MSTP_SCI3 SYSTEM.MSTPCRB.BIT.MSTPB28

#define MSTP_SCI4 SYSTEM.MSTPCRB.BIT.MSTPB27

#define MSTP_SCI5 SYSTEM.MSTPCRB.BIT.MSTPB26

#define MSTP_SCI6 SYSTEM.MSTPCRB.BIT.MSTPB25

#define MSTP_SCI7 SYSTEM.MSTPCRB.BIT.MSTPB24

#define MSTP_SCI8 SYSTEM.MSTPCRC.BIT.MSTPC27

#define MSTP_SCI9 SYSTEM.MSTPCRC.BIT.MSTPC26

#define MSTP_SDHI SYSTEM.MSTPCRD.BIT.MSTPD19

#define MSTP_SMCI0 SYSTEM.MSTPCRB.BIT.MSTPB31

#define MSTP_SMCI1 SYSTEM.MSTPCRB.BIT.MSTPB30

#define MSTP_SMCI10 SYSTEM.MSTPCRC.BIT.MSTPC25

#define MSTP_SMCI11 SYSTEM.MSTPCRC.BIT.MSTPC24

#define MSTP_SMCI12 SYSTEM.MSTPCRB.BIT.MSTPB4

#define MSTP_SMCI2 SYSTEM.MSTPCRB.BIT.MSTPB29

#define MSTP_SMCI3 SYSTEM.MSTPCRB.BIT.MSTPB28

#define MSTP_SMCI4 SYSTEM.MSTPCRB.BIT.MSTPB27

#define MSTP_SMCI5 SYSTEM.MSTPCRB.BIT.MSTPB26

#define MSTP_SMCI6 SYSTEM.MSTPCRB.BIT.MSTPB25

#define MSTP_SMCI7 SYSTEM.MSTPCRB.BIT.MSTPB24

#define MSTP_SMCI8 SYSTEM.MSTPCRC.BIT.MSTPC27

#define MSTP_SMCI9 SYSTEM.MSTPCRC.BIT.MSTPC26

#define MSTP_SSIE0 SYSTEM.MSTPCRD.BIT.MSTPD15

#define MSTP_SSIE1 SYSTEM.MSTPCRD.BIT.MSTPD14

#define MSTP_STBYRAM SYSTEM.MSTPCRC.BIT.MSTPC7

#define MSTP_TEMP1 SYSTEM.MSTPCRB.BIT.MSTPB8

#define MSTP_TMR0 SYSTEM.MSTPCRA.BIT.MSTPA5

#define MSTP_TMR01 SYSTEM.MSTPCRA.BIT.MSTPA5

#define MSTP_TMR1 SYSTEM.MSTPCRA.BIT.MSTPA5

#define MSTP_TMR2 SYSTEM.MSTPCRA.BIT.MSTPA4

#define MSTP_TMR23 SYSTEM.MSTPCRA.BIT.MSTPA4

#define MSTP_TMR3 SYSTEM.MSTPCRA.BIT.MSTPA4

#define MSTP_TPU0 SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TPU1 SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TPU2 SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TPU3 SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TPU4 SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TPU5 SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TPUA SYSTEM.MSTPCRA.BIT.MSTPA13

#define MSTP_TSIP SYSTEM.MSTPCRD.BIT.MSTPD27

```
#define MSTP_USB0 SYSTEM.MSTPCRB.BIT.MSTPB19
```

```
#define MTU (*(volatile struct st_mtu *)0xC120A)
```

```
#define MTU0 (*(volatile struct st_mtu0 *)0xC1290)
```

```
#define MTU1 (*(volatile struct st_mtu1 *)0xC1290)
```

```
#define MTU2 (*(volatile struct st_mtu2 *)0xC1292)
```

```
#define MTU3 (*(volatile struct st_mtu3 *)0xC1200)
```

```
#define MTU4 (*(volatile struct st_mtu4 *)0xC1200)
```

```
#define MTU5 (*(volatile struct st_mtu5 *)0xC1A94)
```

```
#define MTU6 (*(volatile struct st_mtu6 *)0xC1A00)
```

```
#define MTU7 (*(volatile struct st_mtu7 *)0xC1A00)
```

```
#define MTU8 (*(volatile struct st_mtu8 *)0xC1298)
```

```
#define OFSM (*(volatile struct st_ofsm *)0xFE7F5D00)
```

```
#define PDC (*(volatile struct st_pdc *)0xA0500)
```

```
#define PMGI0 (*(volatile struct st_pmgi *)0xC5880)
```

```
#define PMGI1 (*(volatile struct st_pmgi *)0xC5890)
```

```
#define POE3 (*(volatile struct st_poe *)0x8C4C0)
```

```
#define POEG (*(volatile struct st_poeg *)0x9E000)
```

```
#define PORT0 (*(volatile struct st_port0 *)0x8C000)
```

```
#define PORT1 (*(volatile struct st_port1 *)0x8C001)
```

```
#define PORT2 (*(volatile struct st_port2 *)0x8C002)
```

```
#define PORT3 (*(volatile struct st_port3 *)0x8C003)
```

```
#define PORT4 (*(volatile struct st_port4 *)0x8C004)
```

```
#define PORT5 (*(volatile struct st_port5 *)0x8C005)
```

```
#define PORT6 (*(volatile struct st_port6 *)0x8C006)
```

```
#define PORT7 (*(volatile struct st_port7 *)0x8C007)
```

```
#define PORT8 (*(volatile struct st_port8 *)0x8C008)
```

```
#define PORT9 (*(volatile struct st_port9 *)0x8C009)
```

```
#define PORTA (*(volatile struct st_porta *)0x8C00A)
```

```
#define PORTB (*(volatile struct st_portb *)0x8C00B)
```

```
#define PORTC (*(volatile struct st_portc *)0x8C00C)
```

```
#define PORTD (*(volatile struct st_portd *)0x8C00D)
```

```
#define PORTE (*(volatile struct st_porte *)0x8C00E)
```

```
#define PORTF (*(volatile struct st_portf *)0x8C00F)
```

```
#define PORTG (*(volatile struct st_portg *)0x8C010)
```

```
#define PORTH (*(volatile struct st_porth *)0x8C011)
```

```
#define PORTJ (*(volatile struct st_portj *)0x8C012)
```

```
#define PORTK (*(volatile struct st_portk *)0x8C013)
```

```
#define PORTL (*(volatile struct st_portl *)0x8C014)
```

```
#define PORTM (*(volatile struct st_portm *)0x8C015)
```

```
#define PORTN (*(volatile struct st_portn *)0x8C016)
```

```
#define PORTQ (*(volatile struct st_portq *)0x8C017)
```

```
#define PPG0 (*(volatile struct st_ppg0 *)0x881E6)
```

```
#define PPG1 (*(volatile struct st_ppg1 *)0x881F0)
```

```
#define PTPEDMAC (*(volatile struct st_ptpedmac *)0xC0400)
```

```
#define QSPI (*(volatile struct st_qspi *)0x89E00)
```

```
#define RAM (*(volatile struct st_ram *)0x81200)
```

```
#define RIIC0 (*(volatile struct st_riic *)0x88300)
```

```
#define RIIC1 (*(volatile struct st_riic *)0x88320)
```

```
#define RIIC2 (*(volatile struct st_riic *)0x88340)
```

```
#define RSPI0 (*(volatile struct st_rspi *)0xD0100)
```

```
#define RSPI1 (*(volatile struct st_rspi *)0xD0140)
```

```
#define RSPI2 (*(volatile struct st_rspi *)0xD0300)
```

```
#define RTC (*(volatile struct st_rtc *)0x8C400)
```

```
#define S12AD (*(volatile struct st_s12ad *)0x89000)
```

```
#define S12AD1 (*(volatile struct st_s12ad1 *)0x89100)
```

```
#define SCI0 (*(volatile struct st_sci *)0x8A000)
```

```
#define SCI1 (*(volatile struct st_sci *)0x8A020)
```

```
#define SCI10 (*(volatile struct st_sci7 *)0xD0040)
```

```
#define SCI11 (*(volatile struct st_sci7 *)0xD0060)
```

```
#define SCI12 (*(volatile struct st_sci12 *)0x8B300)
```

```
#define SCI2 (*(volatile struct st_sci0 *)0x8A040)
```

```
#define SCI3 (*(volatile struct st_sci0 *)0x8A060)
```

```
#define SCI4 (*(volatile struct st_sci0 *)0x8A080)
```

```
#define SCI5 (*(volatile struct st_sci0 *)0x8A0A0)
```

```
#define SCI6 (*(volatile struct st_sci0 *)0x8A0C0)
```

```
#define SCI7 (*(volatile struct st_sci7 *)0xD00E0)
```

```
#define SCI8 (*(volatile struct st_sci7 *)0xD0000)
```

```
#define SCI9 (*(volatile struct st_sci7 *)0xD0020)
```

```
#define SDHI (*(volatile struct st_sdhi *)0x8AC00)
```

```
#define SMCI0 (*(volatile struct st_smci *)0x8A000)
```

```
#define SMCI1 (*(volatile struct st_smci *)0x8A020)
```

```
#define SMCI10 (*(volatile struct st_smci *)0xD0040)
```

```
#define SMCI11 (*(volatile struct st_smci *)0xD0060)
```

```
#define SMCI12 (*(volatile struct st_smci *)0x8B300)
```

```
#define SMCI2 (*(volatile struct st_smci *)0x8A040)
```

```
#define SMCI3 (*(volatile struct st_smci *)0x8A060)
```

```
#define SMCI4 (*(volatile struct st_smci *)0x8A080)
```

```
#define SMCI5 (*(volatile struct st_smci *)0x8A0A0)
```

```
#define SMCI6 (*(volatile struct st_smci *)0x8A0C0)
```

```
#define SMCI7 (*(volatile struct st_smci *)0xD00E0)
```

```
#define SMCI8 (*(volatile struct st_smci *)0xD0000)
```

```
#define SMCI9 (*(volatile struct st_smci *)0xD0020)
```

```
#define SSIE0 (*(volatile struct st_ssie *)0x8A500)
```

```
#define SSIE1 (*(volatile struct st_ssie *)0x8A540)
```

```
#define SYSTEM (*(volatile struct st_system *)0x80000)
```

```
#define TEMPS (*(volatile struct st_temps *)0x8C500)
```

```
#define TEMPSCONST (*(volatile struct st_tempsconst *)0xFE7F7D7C)
```

```
#define TMR0 (*(volatile struct st_tmr0 *)0x88200)
```

```
#define TMR01 (*(volatile struct st_tmr01 *)0x88204)
```

```
#define TMR1 (*(volatile struct st_tmr1 *)0x88201)
```

```
#define TMR2 (*(volatile struct st_tmr0 *)0x88210)
```

```
#define TMR23 (*(volatile struct st_tmr01 *)0x88214)
```

```
#define TMR3 (*(volatile struct st_tmr1 *)0x88211)
```

```
#define TPU0 (*(volatile struct st_tpu0 *)0x88108)
```

```
#define TPU1 (*(volatile struct st_tpu1 *)0x88108)
```

```
#define TPU2 (*(volatile struct st_tpu2 *)0x8810A)
```

```
#define TPU3 (*(volatile struct st_tpu3 *)0x8810A)
```

```
#define TPU4 (*(volatile struct st_tpu4 *)0x8810C)
```

```
#define TPU5 (*(volatile struct st_tpu5 *)0x8810C)
```

```
#define TPUA (*(volatile struct st_tpu4 *)0x88100)
```

```
#define USB (*(volatile struct st_usb *)0xA0400)
```

```
#define USB0 (*(volatile struct st_usb0 *)0xA0000)
```

```
#define VECT(
```

```
    x,  
    y)
```

```
_VECT( _ ## x ## _ ## y )
```

```
#define VECT_BSC_BUSERR 16
```

```
#define VECT_CMT0_CMI0 28
```

```
#define VECT_CMT1_CMI1 29
```

```
#define VECT_CMTW0_CMWI0 30
```

```
#define VECT_CMTW1_CMWI1 31
```

```
#define VECT_DMAC_DMAC0I 120
```

```
#define VECT_DMAC_DMAC1I 121
```

```
#define VECT_DMAC_DMAC2I 122
```

```
#define VECT_DMAC_DMAC3I 123
```

```
#define VECT_DMAC_DMAC74I 124
```

```
#define VECT_EXDMAC_EXDMAC0I 126
```

```
#define VECT_EXDMAC_EXDMAC1I 127
```

```
#define VECT_FCU_FIFERR 21
```

```
#define VECT_FCU_FRDYI 23
```

```
#define VECT_ICU_GROUPAL0 112
```

```
#define VECT_ICU_GROUPAL1 113
```

```
#define VECT_ICU_GROUPBE0 106
```

```
#define VECT_ICU_GROUPBL0 110
```

```
#define VECT_ICU_GROUPBL1 111
```

```
#define VECT_ICU_GROUPBL2 107
```

```
#define VECT_ICU_GROUPIE0 17
```

```
#define VECT_ICU_IRQ0 64
```

```
#define VECT_ICU_IRQ1 65
```

```
#define VECT_ICU_IRQ10 74
```

```
#define VECT_ICU_IRQ11 75
```

```
#define VECT_ICU_IRQ12 76
```

```
#define VECT_ICU_IRQ13 77
```

```
#define VECT_ICU_IRQ14 78
```

#define VECT_ICU_IRQ15 79

#define VECT_ICU_IRQ2 66

#define VECT_ICU_IRQ3 67

#define VECT_ICU_IRQ4 68

#define VECT_ICU_IRQ5 69

#define VECT_ICU_IRQ6 70

#define VECT_ICU_IRQ7 71

#define VECT_ICU_IRQ8 72

#define VECT_ICU_IRQ9 73

#define VECT_ICU_SWINT 27

#define VECT_ICU_SWINT2 26

#define VECT_IWDT_IWUNI 95

#define VECT_LVD1_LVD1 88

#define VECT_LVD2_LVD2 89

#define VECT_MMCIF_MBFAI 45

```
#define VECT_OST_OSTDI 125
```

```
#define VECT_PDC_PCDFI 97
```

```
#define VECT_PERIA_INTA208 208
```

```
#define VECT_PERIA_INTA209 209
```

```
#define VECT_PERIA_INTA210 210
```

```
#define VECT_PERIA_INTA211 211
```

```
#define VECT_PERIA_INTA212 212
```

```
#define VECT_PERIA_INTA213 213
```

```
#define VECT_PERIA_INTA214 214
```

```
#define VECT_PERIA_INTA215 215
```

```
#define VECT_PERIA_INTA216 216
```

```
#define VECT_PERIA_INTA217 217
```

```
#define VECT_PERIA_INTA218 218
```

```
#define VECT_PERIA_INTA219 219
```

```
#define VECT_PERIA_INTA220 220
```

```
#define VECT_PERIA_INTA221 221
```

```
#define VECT_PERIA_INTA222 222
```

```
#define VECT_PERIA_INTA223 223
```

```
#define VECT_PERIA_INTA224 224
```

```
#define VECT_PERIA_INTA225 225
```

```
#define VECT_PERIA_INTA226 226
```

```
#define VECT_PERIA_INTA227 227
```

```
#define VECT_PERIA_INTA228 228
```

```
#define VECT_PERIA_INTA229 229
```

```
#define VECT_PERIA_INTA230 230
```

```
#define VECT_PERIA_INTA231 231
```

```
#define VECT_PERIA_INTA232 232
```

```
#define VECT_PERIA_INTA233 233
```

```
#define VECT_PERIA_INTA234 234
```

```
#define VECT_PERIA_INTA235 235
```

#define VECT_PERIA_INTA236 236

#define VECT_PERIA_INTA237 237

#define VECT_PERIA_INTA238 238

#define VECT_PERIA_INTA239 239

#define VECT_PERIA_INTA240 240

#define VECT_PERIA_INTA241 241

#define VECT_PERIA_INTA242 242

#define VECT_PERIA_INTA243 243

#define VECT_PERIA_INTA244 244

#define VECT_PERIA_INTA245 245

#define VECT_PERIA_INTA246 246

#define VECT_PERIA_INTA247 247

#define VECT_PERIA_INTA248 248

#define VECT_PERIA_INTA249 249

#define VECT_PERIA_INTA250 250

```
#define VECT_PERIA_INTA251 251
```

```
#define VECT_PERIA_INTA252 252
```

```
#define VECT_PERIA_INTA253 253
```

```
#define VECT_PERIA_INTA254 254
```

```
#define VECT_PERIA_INTA255 255
```

```
#define VECT_PERIB_INTB128 128
```

```
#define VECT_PERIB_INTB129 129
```

```
#define VECT_PERIB_INTB130 130
```

```
#define VECT_PERIB_INTB131 131
```

```
#define VECT_PERIB_INTB132 132
```

```
#define VECT_PERIB_INTB133 133
```

```
#define VECT_PERIB_INTB134 134
```

```
#define VECT_PERIB_INTB135 135
```

```
#define VECT_PERIB_INTB136 136
```

```
#define VECT_PERIB_INTB137 137
```

#define VECT_PERIB_INTB138 138

#define VECT_PERIB_INTB139 139

#define VECT_PERIB_INTB140 140

#define VECT_PERIB_INTB141 141

#define VECT_PERIB_INTB142 142

#define VECT_PERIB_INTB143 143

#define VECT_PERIB_INTB144 144

#define VECT_PERIB_INTB145 145

#define VECT_PERIB_INTB146 146

#define VECT_PERIB_INTB147 147

#define VECT_PERIB_INTB148 148

#define VECT_PERIB_INTB149 149

#define VECT_PERIB_INTB150 150

#define VECT_PERIB_INTB151 151

#define VECT_PERIB_INTB152 152

```
#define VECT_PERIB_INTB153 153
```

```
#define VECT_PERIB_INTB154 154
```

```
#define VECT_PERIB_INTB155 155
```

```
#define VECT_PERIB_INTB156 156
```

```
#define VECT_PERIB_INTB157 157
```

```
#define VECT_PERIB_INTB158 158
```

```
#define VECT_PERIB_INTB159 159
```

```
#define VECT_PERIB_INTB160 160
```

```
#define VECT_PERIB_INTB161 161
```

```
#define VECT_PERIB_INTB162 162
```

```
#define VECT_PERIB_INTB163 163
```

```
#define VECT_PERIB_INTB164 164
```

```
#define VECT_PERIB_INTB165 165
```

```
#define VECT_PERIB_INTB166 166
```

```
#define VECT_PERIB_INTB167 167
```

```
#define VECT_PERIB_INTB168 168
```

```
#define VECT_PERIB_INTB169 169
```

```
#define VECT_PERIB_INTB170 170
```

```
#define VECT_PERIB_INTB171 171
```

```
#define VECT_PERIB_INTB172 172
```

```
#define VECT_PERIB_INTB173 173
```

```
#define VECT_PERIB_INTB174 174
```

```
#define VECT_PERIB_INTB175 175
```

```
#define VECT_PERIB_INTB176 176
```

```
#define VECT_PERIB_INTB177 177
```

```
#define VECT_PERIB_INTB178 178
```

```
#define VECT_PERIB_INTB179 179
```

```
#define VECT_PERIB_INTB180 180
```

```
#define VECT_PERIB_INTB181 181
```

```
#define VECT_PERIB_INTB182 182
```

```
#define VECT_PERIB_INTB183 183
```

```
#define VECT_PERIB_INTB184 184
```

```
#define VECT_PERIB_INTB185 185
```

```
#define VECT_PERIB_INTB186 186
```

```
#define VECT_PERIB_INTB187 187
```

```
#define VECT_PERIB_INTB188 188
```

```
#define VECT_PERIB_INTB189 189
```

```
#define VECT_PERIB_INTB190 190
```

```
#define VECT_PERIB_INTB191 191
```

```
#define VECT_PERIB_INTB192 192
```

```
#define VECT_PERIB_INTB193 193
```

```
#define VECT_PERIB_INTB194 194
```

```
#define VECT_PERIB_INTB195 195
```

```
#define VECT_PERIB_INTB196 196
```

```
#define VECT_PERIB_INTB197 197
```

```
#define VECT_PERIB_INTB198 198
```

```
#define VECT_PERIB_INTB199 199
```

```
#define VECT_PERIB_INTB200 200
```

```
#define VECT_PERIB_INTB201 201
```

```
#define VECT_PERIB_INTB202 202
```

```
#define VECT_PERIB_INTB203 203
```

```
#define VECT_PERIB_INTB204 204
```

```
#define VECT_PERIB_INTB205 205
```

```
#define VECT_PERIB_INTB206 206
```

```
#define VECT_PERIB_INTB207 207
```

```
#define VECT_QSPI_SPRI 42
```

```
#define VECT_QSPI_SPTI 43
```

```
#define VECT_RAM_RAMERR 18
```

```
#define VECT_RIIC0_RXI0 52
```

```
#define VECT_RIIC0_TXI0 53
```

```
#define VECT_RIIC1_RXI1 50
```

```
#define VECT_RIIC1_TXI1 51
```

```
#define VECT_RIIC2_RXI2 54
```

```
#define VECT_RIIC2_TXI2 55
```

```
#define VECT_RSPI0_SPRI0 38
```

```
#define VECT_RSPI0_SPTI0 39
```

```
#define VECT_RSPI1_SPRI1 40
```

```
#define VECT_RSPI1_SPTI1 41
```

```
#define VECT_RSPI2_SPRI2 108
```

```
#define VECT_RSPI2_SPTI2 109
```

```
#define VECT_RTC_ALM 92
```

```
#define VECT_RTC_PRD 93
```

```
#define VECT_SCI0_RXI0 58
```

```
#define VECT_SCI0_TXI0 59
```

```
#define VECT_SCI10_RXI10 104
```

```
#define VECT_SCI10_TXI10 105
```

```
#define VECT_SCI11_RXI11 114
```

```
#define VECT_SCI11_TXI11 115
```

```
#define VECT_SCI12_RXI12 116
```

```
#define VECT_SCI12_TXI12 117
```

```
#define VECT_SCI1_RXI1 60
```

```
#define VECT_SCI1_TXI1 61
```

```
#define VECT_SCI2_RXI2 62
```

```
#define VECT_SCI2_TXI2 63
```

```
#define VECT_SCI3_RXI3 80
```

```
#define VECT_SCI3_TXI3 81
```

```
#define VECT_SCI4_RXI4 82
```

```
#define VECT_SCI4_TXI4 83
```

```
#define VECT_SCI5_RXI5 84
```

```
#define VECT_SCI5_TXI5 85
```

```
#define VECT_SCI6_RXI6 86
```

```
#define VECT_SCI6_TXI6 87
```

```
#define VECT_SCI7_RXI7 98
```

```
#define VECT_SCI7_TXI7 99
```

```
#define VECT_SCI8_RXI8 100
```

```
#define VECT_SCI8_TXI8 101
```

```
#define VECT_SCI9_RXI9 102
```

```
#define VECT_SCI9_TXI9 103
```

```
#define VECT_SDHI_SBFBI 44
```

```
#define VECT_SSIE0_SSIRXI0 47
```

```
#define VECT_SSIE0_SSITXI0 46
```

```
#define VECT_SSIE1_SSIRTI1 48
```

```
#define VECT_USB0_D0FIFO0 34
```

```
#define VECT_USB0_D1FIFO0 35
```

```
#define VECT_USB0_USBR0 90
```

[illegible]

[illegible]

[illegible]

[illegible]

01237 {
01238 DTCE_ICU_SWINT2=26,DTCE_ICU_SWINT,
01239 DTCE_CMT0_CMI0,
01240 DTCE_CMT1_CMI1,
01241 DTCE_CMTW0_CMWI0,
01242 DTCE_CMTW1_CMWI1,
01243 DTCE_USB0_D0FIFO0=34,DTCE_USB0_D1FIFO0,
01244 DTCE_RSPI0_SPRI0=38,DTCE_RSPI0_SPTI0,
01245 DTCE_RSPI1_SPRI1,DTCE_RSPI1_SPTI1,
01246 DTCE_QSPI_SPRI,DTCE_QSPI_SPTI,
01247 DTCE_SDHI_SBFAL,
01248 DTCE_MMCI MBFAL,
01249 DTCE_SSIE0_SSITXI0,DTCE_SSIE0_SSIRXI0,
01250 DTCE_SSIE1_SSIRT11,
01251 DTCE_RIIC1_RXI1=50,DTCE_RIIC1_TXI1,
01252 DTCE_RIIC0_RXI0,DTCE_RIIC0_TXI0,
01253 DTCE_RIIC2_RXI2,DTCE_RIIC2_TXI2,
01254 DTCE_SCI0_RXI0=58,DTCE_SCI0_TXI0,
01255 DTCE_SCI1_RXI1,DTCE_SCI1_TXI1,
01256 DTCE_SCI2_RXI2,DTCE_SCI2_TXI2,
01257 DTCE_ICU_IRQ0,DTCE_ICU_IRQ1,DTCE_ICU_IRQ2,DTCE_ICU_IRQ3,DTCE_ICU_IRQ4,DTCE_ICU_IRQ5,DTCE_ICU_IRQ6,DTCE_ICU_IRQ7,
01258 DTCE_ICU_IRQ8,DTCE_ICU_IRQ9,DTCE_ICU_IRQ10,DTCE_ICU_IRQ11,DTCE_ICU_IRQ12,DTCE_ICU_IRQ13,DTCE_ICU_IRQ14,DTCE_ICU_IRQ15,
01259 DTCE_SCI3_RXI3,DTCE_SCI3_TXI3,
01260 DTCE_SCI4_RXI4,DTCE_SCI4_TXI4,
01261 DTCE_SCI5_RXI5,DTCE_SCI5_TXI5,
01262 DTCE_SCI6_RXI6,DTCE_SCI6_TXI6,
01263 DTCE_PDC_PCDFI=97,
01264 DTCE_SCI7_RXI7,DTCE_SCI7_TXI7,
01265 DTCE_SCI8_RXI8,DTCE_SCI8_TXI8,
01266 DTCE_SCI9_RXI9,DTCE_SCI9_TXI9,
01267 DTCE_SCI10_RXI10,DTCE_SCI10_TXI10,
01268 DTCE_RSPI2_SPRI2=108,DTCE_RSPI2_SPTI2,
01269 DTCE_SCI11_RXI11=114,DTCE_SCI11_TXI11,
01270 DTCE_SCI12_RXI12,DTCE_SCI12_TXI12,
01271 DTCE_DMAC_DMAC0I=120,DTCE_DMAC_DMAC1I,DTCE_DMAC_DMAC2I,DTCE_DMAC_DMAC3I,
01272 DTCE_EXDMAC_EXDMAC0I=126,DTCE_EXDMAC_EXDMAC1I,
01273 DTCE_PERIB_INTB128,DTCE_PERIB_INTB129,DTCE_PERIB_INTB130,DTCE_PERIB_INTB131,DTCE_PERIB_INTB132,DTCE_PERIB_INTB133,
01274 DTCE_PERIB_INTB133,DTCE_PERIB_INTB134,DTCE_PERIB_INTB135,DTCE_PERIB_INTB136,DTCE_PERIB_INTB137,DTCE_PERIB_INTB138,
01275 DTCE_PERIB_INTB138,DTCE_PERIB_INTB139,DTCE_PERIB_INTB140,DTCE_PERIB_INTB141,DTCE_PERIB_INTB142,DTCE_PERIB_INTB143,
01276 DTCE_PERIB_INTB143,DTCE_PERIB_INTB144,DTCE_PERIB_INTB145,DTCE_PERIB_INTB146,DTCE_PERIB_INTB147,DTCE_PERIB_INTB148,
01277 DTCE_PERIB_INTB148,DTCE_PERIB_INTB149,DTCE_PERIB_INTB150,DTCE_PERIB_INTB151,DTCE_PERIB_INTB152,DTCE_PERIB_INTB153,
01278 DTCE_PERIB_INTB153,DTCE_PERIB_INTB154,DTCE_PERIB_INTB155,DTCE_PERIB_INTB156,DTCE_PERIB_INTB157,DTCE_PERIB_INTB158,
01279 DTCE_PERIB_INTB158,DTCE_PERIB_INTB159,DTCE_PERIB_INTB160,DTCE_PERIB_INTB161,DTCE_PERIB_INTB162,DTCE_PERIB_INTB163,
01280 DTCE_PERIB_INTB163,DTCE_PERIB_INTB164,DTCE_PERIB_INTB165,DTCE_PERIB_INTB166,DTCE_PERIB_INTB167,DTCE_PERIB_INTB168,
01281 DTCE_PERIB_INTB168,DTCE_PERIB_INTB169,DTCE_PERIB_INTB170,DTCE_PERIB_INTB171,DTCE_PERIB_INTB172,DTCE_PERIB_INTB173,
01282 DTCE_PERIB_INTB173,DTCE_PERIB_INTB174,DTCE_PERIB_INTB175,DTCE_PERIB_INTB176,DTCE_PERIB_INTB177,DTCE_PERIB_INTB178,
01283 DTCE_PERIB_INTB178,DTCE_PERIB_INTB179,DTCE_PERIB_INTB180,DTCE_PERIB_INTB181,DTCE_PERIB_INTB182,DTCE_PERIB_INTB183,
01284 DTCE_PERIB_INTB183,DTCE_PERIB_INTB184,DTCE_PERIB_INTB185,DTCE_PERIB_INTB186,DTCE_PERIB_INTB187,DTCE_PERIB_INTB188,
01285 DTCE_PERIB_INTB188,DTCE_PERIB_INTB189,DTCE_PERIB_INTB190,DTCE_PERIB_INTB191,DTCE_PERIB_INTB192,DTCE_PERIB_INTB193,
01286 DTCE_PERIB_INTB193,DTCE_PERIB_INTB194,DTCE_PERIB_INTB195,DTCE_PERIB_INTB196,DTCE_PERIB_INTB197,DTCE_PERIB_INTB198,
01287 DTCE_PERIB_INTB198,DTCE_PERIB_INTB199,DTCE_PERIB_INTB200,DTCE_PERIB_INTB201,DTCE_PERIB_INTB202,DTCE_PERIB_INTB203,
01288 DTCE_PERIB_INTB203,DTCE_PERIB_INTB204,DTCE_PERIB_INTB205,DTCE_PERIB_INTB206,DTCE_PERIB_INTB207,DTCE_PERIB_INTB208,
01289 DTCE_PERIA_INTA208,DTCE_PERIA_INTA209,DTCE_PERIA_INTA210,DTCE_PERIA_INTA211,DTCE_PERIA_INTA212,DTCE_PERIA_INTA213,
01290 DTCE_PERIA_INTA213,DTCE_PERIA_INTA214,DTCE_PERIA_INTA215,DTCE_PERIA_INTA216,DTCE_PERIA_INTA217,DTCE_PERIA_INTA218,
01291 DTCE_PERIA_INTA218,DTCE_PERIA_INTA219,DTCE_PERIA_INTA220,DTCE_PERIA_INTA221,DTCE_PERIA_INTA222,DTCE_PERIA_INTA223,
01292 DTCE_PERIA_INTA223,DTCE_PERIA_INTA224,DTCE_PERIA_INTA225,DTCE_PERIA_INTA226,DTCE_PERIA_INTA227,DTCE_PERIA_INTA228,

```

01293 DTCE_PERIA_INTA228,DTCE_PERIA_INTA229,DTCE_PERIA_INTA230,DTCE_PERIA_INTA231,DTCE_PERIA_INTA232,
01294 DTCE_PERIA_INTA233,DTCE_PERIA_INTA234,DTCE_PERIA_INTA235,DTCE_PERIA_INTA236,DTCE_PERIA_INTA237,
01295 DTCE_PERIA_INTA238,DTCE_PERIA_INTA239,DTCE_PERIA_INTA240,DTCE_PERIA_INTA241,DTCE_PERIA_INTA242,
01296 DTCE_PERIA_INTA243,DTCE_PERIA_INTA244,DTCE_PERIA_INTA245,DTCE_PERIA_INTA246,DTCE_PERIA_INTA247,
01297 DTCE_PERIA_INTA248,DTCE_PERIA_INTA249,DTCE_PERIA_INTA250,DTCE_PERIA_INTA251,DTCE_PERIA_INTA252,
01298 DTCE_PERIA_INTA253,DTCE_PERIA_INTA254,DTCE_PERIA_INTA255
01299 } enum_dtce_t;

```

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

```
01301      {  
01302 IER_BSC_BUSERR=0x02,  
01303 IER_ICU_GROUPIE0=0x02,  
01304 IER_RAM_RAMERR=0x02,  
01305 IER_FCU_FIFERR=0x02,IER_FCU_FRDYI=0x02,  
01306 IER_ICU_SWINT2=0x03,IER_ICU_SWINT=0x03,  
01307 IER_CMT0_CMI0=0x03,  
01308 IER_CMT1_CMI1=0x03,  
01309 IER_CMTW0_CMWI0=0x03,  
01310 IER_CMTW1_CMWI1=0x03,  
01311 IER_USB0_D0FIFO0=0x04,IER_USB0_D1FIFO0=0x04,  
01312 IER_RSPI0_SPRI0=0x04,IER_RSPI0_SPTI0=0x04,  
01313 IER_RSPI1_SPRI1=0x05,IER_RSPI1_SPTI1=0x05,  
01314 IER_QSPI_SPRI=0x05,IER_QSPI_SPTI=0x05,  
01315 IER_SDHI_SBFBI=0x05,  
01316 IER_MMCIF_MBFAI=0x05,  
01317 IER_SSIE0_SSTXI0=0x05,IER_SSIE0_SSIRXI0=0x05,  
01318 IER_SSIE1_SSIRTI1=0x06,  
01319 IER_RIIC1_RXI1=0x06,IER_RIIC1_TXI1=0x06,  
01320 IER_RIIC0_RXI0=0x06,IER_RIIC0_TXI0=0x06,  
01321 IER_RIIC2_RXI2=0x06,IER_RIIC2_TXI2=0x06,  
01322 IER_SCIO_RXI0=0x07,IER_SCIO_TXI0=0x07,  
01323 IER_SCI1_RXI1=0x07,IER_SCI1_TXI1=0x07,  
01324 IER_SCI2_RXI2=0x07,IER_SCI2_TXI2=0x07,  
01325  
IER_ICU_IRQ0=0x08,IER_ICU_IRQ1=0x08,IER_ICU_IRQ2=0x08,IER_ICU_IRQ3=0x08,IER_ICU_IRQ4=0x08,IER_ICU_IRQ5=0x08,I  
01326  
IER_ICU_IRQ8=0x09,IER_ICU_IRQ9=0x09,IER_ICU_IRQ10=0x09,IER_ICU_IRQ11=0x09,IER_ICU_IRQ12=0x09,IER_ICU_IRQ13=0  
01327 IER_SCI3_RXI3=0x0A,IER_SCI3_TXI3=0x0A,  
01328 IER_SCI4_RXI4=0x0A,IER_SCI4_TXI4=0x0A,  
01329 IER_SCI5_RXI5=0x0A,IER_SCI5_TXI5=0x0A,  
01330 IER_SCI6_RXI6=0x0A,IER_SCI6_TXI6=0x0A,  
01331 IER_LVD1_LVD1=0x0B,  
01332 IER_LVD2_LVD2=0x0B,  
01333 IER_USB0_USBR0=0x0B,  
01334 IER_RTC_ALM=0x0B,IER_RTC_PRD=0x0B.
```

```
01335 IER_IWDT_IWUNI=0x0B,
01336 IER_WDT_WUNI=0x0C,
01337 IER_PDC_PCDFI=0x0C,
01338 IER_SCI7_RXI7=0x0C,IER_SCI7_TXI7=0x0C,
01339 IER_SCI8_RXI8=0x0C,IER_SCI8_TXI8=0x0C,
01340 IER_SCI9_RXI9=0x0C,IER_SCI9_TXI9=0x0C,
01341 IER_SCI10_RXI10=0x0D,IER_SCI10_TXI10=0x0D,
01342 IER_ICU_GROUPBE0=0x0D,IER_ICU_GROUPBL2=0x0D,
01343 IER_RSPI2_SPRI2=0x0D,IER_RSPI2_SPTI2=0x0D,
01344 IER_ICU_GROUPBL0=0x0D,IER_ICU_GROUPBL1=0x0D,IER_ICU_GROUPAL0=0x0E,IER_ICU_GROUPAL1=0x0E,
01345 IER_SCI11_RXI11=0x0E,IER_SCI11_TXI11=0x0E,
01346 IER_SCI12_RXI12=0x0E,IER_SCI12_TXI12=0x0E,
01347 IER_DMAC_DMAC0I=0x0F,IER_DMAC_DMAC1I=0x0F,IER_DMAC_DMAC2I=0x0F,IER_DMAC_DMAC3I=0x0F,IER_DMAC_DMA
01348 IER_OST_OSTD1=0x0F,
01349 IER_EXDMAC_EXDMAC0I=0x0F,IER_EXDMAC_EXDMAC1I=0x0F,
01350 IER_PERIB_INTB128=0x10,IER_PERIB_INTB129=0x10,IER_PERIB_INTB130=0x10,IER_PERIB_INTB131=0x10,IER_PERIB_INTB
01351 IER_PERIB_INTB133=0x10,IER_PERIB_INTB134=0x10,IER_PERIB_INTB135=0x10,IER_PERIB_INTB136=0x11,IER_PERIB_INTB
01352 IER_PERIB_INTB138=0x11,IER_PERIB_INTB139=0x11,IER_PERIB_INTB140=0x11,IER_PERIB_INTB141=0x11,IER_PERIB_INTB
01353 IER_PERIB_INTB143=0x11,IER_PERIB_INTB144=0x12,IER_PERIB_INTB145=0x12,IER_PERIB_INTB146=0x12,IER_PERIB_INTB
01354 IER_PERIB_INTB148=0x12,IER_PERIB_INTB149=0x12,IER_PERIB_INTB150=0x12,IER_PERIB_INTB151=0x12,IER_PERIB_INTB
01355 IER_PERIB_INTB153=0x13,IER_PERIB_INTB154=0x13,IER_PERIB_INTB155=0x13,IER_PERIB_INTB156=0x13,IER_PERIB_INTB
01356 IER_PERIB_INTB158=0x13,IER_PERIB_INTB159=0x13,IER_PERIB_INTB160=0x14,IER_PERIB_INTB161=0x14,IER_PERIB_INTB
01357 IER_PERIB_INTB163=0x14,IER_PERIB_INTB164=0x14,IER_PERIB_INTB165=0x14,IER_PERIB_INTB166=0x14,IER_PERIB_INTB
01358 IER_PERIB_INTB168=0x15,IER_PERIB_INTB169=0x15,IER_PERIB_INTB170=0x15,IER_PERIB_INTB171=0x15,IER_PERIB_INTB
01359 IER_PERIB_INTB173=0x15,IER_PERIB_INTB174=0x15,IER_PERIB_INTB175=0x15,IER_PERIB_INTB176=0x16,IER_PERIB_INTB
01360 IER_PERIB_INTB178=0x16,IER_PERIB_INTB179=0x16,IER_PERIB_INTB180=0x16,IER_PERIB_INTB181=0x16,IER_PERIB_INTB
01361 IER_PERIB_INTB183=0x16,IER_PERIB_INTB184=0x17,IER_PERIB_INTB185=0x17,IER_PERIB_INTB186=0x17,IER_PERIB_INTB
01362 IER_PERIB_INTB188=0x17,IER_PERIB_INTB189=0x17,IER_PERIB_INTB190=0x17,IER_PERIB_INTB191=0x17,IER_PERIB_INTB
01363 IER_PERIB_INTB193=0x18,IER_PERIB_INTB194=0x18,IER_PERIB_INTB195=0x18,IER_PERIB_INTB196=0x18,IER_PERIB_INTB
01364 IER_PERIB_INTB198=0x18,IER_PERIB_INTB199=0x18,IER_PERIB_INTB200=0x19,IER_PERIB_INTB201=0x19,IER_PERIB_INTB
01365 IER_PERIB_INTB203=0x19,IER_PERIB_INTB204=0x19,IER_PERIB_INTB205=0x19,IER_PERIB_INTB206=0x19,IER_PERIB_INTB
01366 IER_PERIA_INTA208=0x1A,IER_PERIA_INTA209=0x1A,IER_PERIA_INTA210=0x1A,IER_PERIA_INTA211=0x1A,IER_PERIA_INT
01367 IER_PERIA_INTA213=0x1A,IER_PERIA_INTA214=0x1A,IER_PERIA_INTA215=0x1A,IER_PERIA_INTA216=0x1B,IER_PERIA_INT
01368 IER_PERIA_INTA218=0x1B,IER_PERIA_INTA219=0x1B,IER_PERIA_INTA220=0x1B,IER_PERIA_INTA221=0x1B,IER_PERIA_INT
01369 IER_PERIA_INTA223=0x1B,IER_PERIA_INTA224=0x1C,IER_PERIA_INTA225=0x1C,IER_PERIA_INTA226=0x1C,IER_PERIA_INT
01370 IER_PERIA_INTA228=0x1C,IER_PERIA_INTA229=0x1C,IER_PERIA_INTA230=0x1C,IER_PERIA_INTA231=0x1C,IER_PERIA_INT
01371 IER_PERIA_INTA233=0x1D,IER_PERIA_INTA234=0x1D,IER_PERIA_INTA235=0x1D,IER_PERIA_INTA236=0x1D,IER_PERIA_INT
01372 IER_PERIA_INTA238=0x1D,IER_PERIA_INTA239=0x1D,IER_PERIA_INTA240=0x1E,IER_PERIA_INTA241=0x1E,IER_PERIA_INT
01373 IER_PERIA_INTA243=0x1E,IER_PERIA_INTA244=0x1E,IER_PERIA_INTA245=0x1E,IER_PERIA_INTA246=0x1E,IER_PERIA_INT
01374 IER_PERIA_INTA248=0x1F,IER_PERIA_INTA249=0x1F,IER_PERIA_INTA250=0x1F,IER_PERIA_INTA251=0x1F,IER_PERIA_INT
01375 IER_PERIA_INTA253=0x1F,IER_PERIA_INTA254=0x1F,IER_PERIA_INTA255=0x1F
01376 } enum_ier_t;
```

enum [enum_ipr_t](#)

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

```

01378      {
01379 IPR_BSC_BUSERR=0,
01380 IPR_ICU_GROUPIE0=0,
01381 IPR_RAM_RAMERR=0,
01382 IPR_FCU_FIFERR=1,IPR_FCU_FRDYI=2,
01383 IPR_ICU_SWINT2=3,IPR_ICU_SWINT=3,
01384 IPR_CMT0_CMI0=4,
01385 IPR_CMT1_CMI1=5,
01386 IPR_CMTW0_CMWI0=6,
01387 IPR_CMTW1_CMWI1=7,
01388 IPR_USB0_D0FIFO0=34,IPR_USB0_D1FIFO0=35,
01389 IPR_RSPI0_SPRI0=38,IPR_RSPI0_SPTI0=39,
01390 IPR_RSPI1_SPRI1=40,IPR_RSPI1_SPTI1=41,
01391 IPR_QSPI_SPRI=42,IPR_QSPI_SPTI=43,
01392 IPR_SDHI_SBFBI=44,
01393 IPR_MMCFB_MBFBI=45,
01394 IPR_SSIE0_SSI0=46,IPR_SSIE0_SSI1=47,
01395 IPR_SSIE1_SSI1=48,
01396 IPR_RIIC1_RXI1=50,IPR_RIIC1_TXI1=51,
01397 IPR_RIIC0_RXI0=52,IPR_RIIC0_TXI0=53,
01398 IPR_RIIC2_RXI2=54,IPR_RIIC2_TXI2=55,
01399 IPR_SCI0_RXI0=58,IPR_SCI0_TXI0=59,
01400 IPR_SCI1_RXI1=60,IPR_SCI1_TXI1=61,
01401 IPR_SCI2_RXI2=62,IPR_SCI2_TXI2=63,
01402      IPR_ICU_IRQ0=64,IPR_ICU_IRQ1=65,IPR_ICU_IRQ2=66,IPR_ICU_IRQ3=67,IPR_ICU_IRQ4=68,IPR_ICU_IRQ5=69,IPR_ICU_IRQ6=70,
01403      IPR_ICU_IRQ8=72,IPR_ICU_IRQ9=73,IPR_ICU_IRQ10=74,IPR_ICU_IRQ11=75,IPR_ICU_IRQ12=76,IPR_ICU_IRQ13=77,IPR_ICU_IRQ14=78,
01404 IPR_SCI3_RXI3=80,IPR_SCI3_TXI3=81,
01405 IPR_SCI4_RXI4=82,IPR_SCI4_TXI4=83,
01406 IPR_SCI5_RXI5=84,IPR_SCI5_TXI5=85,
01407 IPR_SCI6_RXI6=86,IPR_SCI6_TXI6=87,
01408 IPR_LVD1_LVD1=88,
01409 IPR_LVD2_LVD2=89,
01410 IPR_USB0_USBR0=90,
01411 IPR_RTC_ALM=92,IPR_RTC_PRD=93,

```

```
01412 IPR_IWDT_IWUNI=95,
01413 IPR_WDT_WUNI=96,
01414 IPR_PDC_PCDFI=97,
01415 IPR_SCI7_RXI7=98,IPR_SCI7_TXI7=99,
01416 IPR_SCI8_RXI8=100,IPR_SCI8_TXI8=101,
01417 IPR_SCI9_RXI9=102,IPR_SCI9_TXI9=103,
01418 IPR_SCI10_RXI10=104,IPR_SCI10_TXI10=105,
01419 IPR_ICU_GROUPBE0=106,IPR_ICU_GROUPBL2=107,
01420 IPR_RSPI2_SPRI2=108,IPR_RSPI2_SPTI2=109,
01421 IPR_ICU_GROUPBL0=110,IPR_ICU_GROUPBL1=111,IPR_ICU_GROUPAL0=112,IPR_ICU_GROUPAL1=113,
01422 IPR_SCI11_RXI11=114,IPR_SCI11_TXI11=115,
01423 IPR_SCI12_RXI12=116,IPR_SCI12_TXI12=117,
01424
    IPR_DMAC_DMAC0I=120,IPR_DMAC_DMAC1I=121,IPR_DMAC_DMAC2I=122,IPR_DMAC_DMAC3I=123,IPR_DMAC_DMAC74I=
01425 IPR_OST_OSTDI=125,
01426 IPR_EXDMAC_EXDMAC0I=126,IPR_EXDMAC_EXDMAC1I=127,
01427
    IPR_PERIB_INTB128=128,IPR_PERIB_INTB129=129,IPR_PERIB_INTB130=130,IPR_PERIB_INTB131=131,IPR_PERIB_INTB132=
01428
    IPR_PERIB_INTB133=133,IPR_PERIB_INTB134=134,IPR_PERIB_INTB135=135,IPR_PERIB_INTB136=136,IPR_PERIB_INTB137=
01429
    IPR_PERIB_INTB138=138,IPR_PERIB_INTB139=139,IPR_PERIB_INTB140=140,IPR_PERIB_INTB141=141,IPR_PERIB_INTB142=
01430
    IPR_PERIB_INTB143=143,IPR_PERIB_INTB144=144,IPR_PERIB_INTB145=145,IPR_PERIB_INTB146=146,IPR_PERIB_INTB147=
01431
    IPR_PERIB_INTB148=148,IPR_PERIB_INTB149=149,IPR_PERIB_INTB150=150,IPR_PERIB_INTB151=151,IPR_PERIB_INTB152=
01432
    IPR_PERIB_INTB153=153,IPR_PERIB_INTB154=154,IPR_PERIB_INTB155=155,IPR_PERIB_INTB156=156,IPR_PERIB_INTB157=
01433
    IPR_PERIB_INTB158=158,IPR_PERIB_INTB159=159,IPR_PERIB_INTB160=160,IPR_PERIB_INTB161=161,IPR_PERIB_INTB162=
01434
    IPR_PERIB_INTB163=163,IPR_PERIB_INTB164=164,IPR_PERIB_INTB165=165,IPR_PERIB_INTB166=166,IPR_PERIB_INTB167=
01435
    IPR_PERIB_INTB168=168,IPR_PERIB_INTB169=169,IPR_PERIB_INTB170=170,IPR_PERIB_INTB171=171,IPR_PERIB_INTB172=
01436
    IPR_PERIB_INTB173=173,IPR_PERIB_INTB174=174,IPR_PERIB_INTB175=175,IPR_PERIB_INTB176=176,IPR_PERIB_INTB177=
01437
    IPR_PERIB_INTB178=178,IPR_PERIB_INTB179=179,IPR_PERIB_INTB180=180,IPR_PERIB_INTB181=181,IPR_PERIB_INTB182=
01438
    IPR_PERIB_INTB183=183,IPR_PERIB_INTB184=184,IPR_PERIB_INTB185=185,IPR_PERIB_INTB186=186,IPR_PERIB_INTB187=
01439
    IPR_PERIB_INTB188=188,IPR_PERIB_INTB189=189,IPR_PERIB_INTB190=190,IPR_PERIB_INTB191=191,IPR_PERIB_INTB192=
01440
    IPR_PERIB_INTB193=193,IPR_PERIB_INTB194=194,IPR_PERIB_INTB195=195,IPR_PERIB_INTB196=196,IPR_PERIB_INTB197=
01441
    IPR_PERIB_INTB198=198,IPR_PERIB_INTB199=199,IPR_PERIB_INTB200=200,IPR_PERIB_INTB201=201,IPR_PERIB_INTB202=
01442
    IPR_PERIB_INTB203=203,IPR_PERIB_INTB204=204,IPR_PERIB_INTB205=205,IPR_PERIB_INTB206=206,IPR_PERIB_INTB207=
01443
    IPR_PERIA_INTA208=208,IPR_PERIA_INTA209=209,IPR_PERIA_INTA210=210,IPR_PERIA_INTA211=211,IPR_PERIA_INTA212=
01444
    IPR_PERIA_INTA213=213,IPR_PERIA_INTA214=214,IPR_PERIA_INTA215=215,IPR_PERIA_INTA216=216,IPR_PERIA_INTA217=
01445
    IPR_PERIA_INTA218=218,IPR_PERIA_INTA219=219,IPR_PERIA_INTA220=220,IPR_PERIA_INTA221=221,IPR_PERIA_INTA222=
01446
    IPR_PERIA_INTA223=223,IPR_PERIA_INTA224=224,IPR_PERIA_INTA225=225,IPR_PERIA_INTA226=226,IPR_PERIA_INTA227=
01447
    IPR_PERIA_INTA228=228,IPR_PERIA_INTA229=229,IPR_PERIA_INTA230=230,IPR_PERIA_INTA231=231,IPR_PERIA_INTA232=
01448
    IPR_PERIA_INTA233=233,IPR_PERIA_INTA234=234,IPR_PERIA_INTA235=235,IPR_PERIA_INTA236=236,IPR_PERIA_INTA237=
01449
    IPR_PERIA_INTA238=238,IPR_PERIA_INTA239=239,IPR_PERIA_INTA240=240,IPR_PERIA_INTA241=241,IPR_PERIA_INTA242=
01450
    IPR_PERIA_INTA243=243,IPR_PERIA_INTA244=244,IPR_PERIA_INTA245=245,IPR_PERIA_INTA246=246,IPR_PERIA_INTA247=
01451
    IPR_PERIA_INTA248=248,IPR_PERIA_INTA249=249,IPR_PERIA_INTA250=250,IPR_PERIA_INTA251=251,IPR_PERIA_INTA252=
01452 IPR_PERIA_INTA253=253,IPR_PERIA_INTA254=254,IPR_PERIA_INTA255=255,
01453 IPR_ICU_SWI=3,
01454 IPR_CMT0_=4,
01455 IPR_CMT1_=5,
01456 IPR_CMTW0_=6,
01457 IPR_CMTW1_=7,
01458 IPR_SDHI_=44,
01459 IPR_MMCFI_=45,
01460 IPR_SSIE1_=48,
01461 IPR_LVD1_=88,
01462 IPR_LVD2_=89,
01463 IPR_IWDT_=95,
01464 IPR_WDT_=96,
01465 IPR_PDC_=97,
01466 IPR_OST_=125
01467 } enum_ipr_t;
```

enum enum_ir_t

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

```

01161 {
01162 IR_BSC_BUSERR=16,IR_ICU_GROUPIE0=17,
01163 IR_RAM_RAMERR,
01164 IR_FCU_FIFERR=21,IR_FCU_FRDYI=23,
01165 IR_ICU_SWINT2=26,IR_ICU_SWINT,
01166 IR_CMT0_CMI0,
01167 IR_CMT1_CMI1,
01168 IR_CMTW0_CMWI0,
01169 IR_CMTW1_CMWI1,
01170 IR_USB0_D0FIFO0=34,IR_USB0_D1FIFO0,
01171 IR_RSPI0_SPRI0=38,IR_RSPI0_SPTI0,
01172 IR_RSPI1_SPRI1,IR_RSPI1_SPTI1,
01173 IR_QSPI_SPRI,IR_QSPI_SPTI,
01174 IR_SDHI_SBFAL,
01175 IR_MMCIF_MBFAL,
01176 IR_SSIE0_SSITXI0,IR_SSIE0_SSIRXI0,
01177 IR_SSIE1_SSIRTI1,
01178 IR_RIIC1_RXI1=50,IR_RIIC1_TXI1,
01179 IR_RIIC0_RXI0,IR_RIIC0_TXI0,
01180 IR_RIIC2_RXI2,IR_RIIC2_TXI2,
01181 IR_SCI0_RXI0=58,IR_SCI0_TXI0,
01182 IR_SCI1_RXI1,IR_SCI1_TXI1,
01183 IR_SCI2_RXI2,IR_SCI2_TXI2,
01184
    IR_ICU_IRQ0,IR_ICU_IRQ1,IR_ICU_IRQ2,IR_ICU_IRQ3,IR_ICU_IRQ4,IR_ICU_IRQ5,IR_ICU_IRQ6,IR_ICU_IRQ7,
01185
    IR_ICU_IRQ8,IR_ICU_IRQ9,IR_ICU_IRQ10,IR_ICU_IRQ11,IR_ICU_IRQ12,IR_ICU_IRQ13,IR_ICU_IRQ14,IR_ICU_IRQ15,
01186 IR_SCI3_RXI3,IR_SCI3_TXI3,
01187 IR_SCI4_RXI4,IR_SCI4_TXI4,
01188 IR_SCI5_RXI5,IR_SCI5_TXI5,
01189 IR_SCI6_RXI6,IR_SCI6_TXI6,
01190 IR_LVD1_LVD1,
01191 IR_LVD2_LVD2,
01192 IR_USB0_USBR0,
01193 IR_RTC_ALM=92,IR_RTC_PRD,
01194 IR_IWDT_IWUNI=95,
01195 IR_WDT_WUNI,
01196 IR_PDC_PCDFI,
01197 IR_SCI7_RXI7,IR_SCI7_TXI7,
01198 IR_SCI8_RXI8,IR_SCI8_TXI8,
01199 IR_SCI9_RXI9,IR_SCI9_TXI9,
01200 IR_SCI10_RXI10,IR_SCI10_TXI10,
01201 IR_ICU_GROUPBE0,IR_ICU_GROUPBL2,
01202 IR_RSPI2_SPRI2,IR_RSPI2_SPTI2,
01203 IR_ICU_GROUPBL0,IR_ICU_GROUPBL1,IR_ICU_GROUPAL0,IR_ICU_GROUPAL1,
01204 IR_SCI11_RXI11,IR_SCI11_TXI11,
01205 IR_SCI12_RXI12,IR_SCI12_TXI12,
01206 IR_DMACH_DMACH0=120,IR_DMACH_DMACH1,IR_DMACH_DMACH2,IR_DMACH_DMACH3,IR_DMACH_DMACH74I,
01207 IR_OST_OSTDI,
01208 IR_EXDMACH_EXDMACH0,IR_EXDMACH_EXDMACH1,
01209 IR_PERIB_INTB128,IR_PERIB_INTB129,IR_PERIB_INTB130,IR_PERIB_INTB131,IR_PERIB_INTB132,
01210 IR_PERIB_INTB133,IR_PERIB_INTB134,IR_PERIB_INTB135,IR_PERIB_INTB136,IR_PERIB_INTB137,
01211 IR_PERIB_INTB138,IR_PERIB_INTB139,IR_PERIB_INTB140,IR_PERIB_INTB141,IR_PERIB_INTB142,

```

```
01212 IR_PERIB_INTB143,IR_PERIB_INTB144,IR_PERIB_INTB145,IR_PERIB_INTB146,IR_PERIB_INTB147,
01213 IR_PERIB_INTB148,IR_PERIB_INTB149,IR_PERIB_INTB150,IR_PERIB_INTB151,IR_PERIB_INTB152,
01214 IR_PERIB_INTB153,IR_PERIB_INTB154,IR_PERIB_INTB155,IR_PERIB_INTB156,IR_PERIB_INTB157,
01215 IR_PERIB_INTB158,IR_PERIB_INTB159,IR_PERIB_INTB160,IR_PERIB_INTB161,IR_PERIB_INTB162,
01216 IR_PERIB_INTB163,IR_PERIB_INTB164,IR_PERIB_INTB165,IR_PERIB_INTB166,IR_PERIB_INTB167,
01217 IR_PERIB_INTB168,IR_PERIB_INTB169,IR_PERIB_INTB170,IR_PERIB_INTB171,IR_PERIB_INTB172,
01218 IR_PERIB_INTB173,IR_PERIB_INTB174,IR_PERIB_INTB175,IR_PERIB_INTB176,IR_PERIB_INTB177,
01219 IR_PERIB_INTB178,IR_PERIB_INTB179,IR_PERIB_INTB180,IR_PERIB_INTB181,IR_PERIB_INTB182,
01220 IR_PERIB_INTB183,IR_PERIB_INTB184,IR_PERIB_INTB185,IR_PERIB_INTB186,IR_PERIB_INTB187,
01221 IR_PERIB_INTB188,IR_PERIB_INTB189,IR_PERIB_INTB190,IR_PERIB_INTB191,IR_PERIB_INTB192,
01222 IR_PERIB_INTB193,IR_PERIB_INTB194,IR_PERIB_INTB195,IR_PERIB_INTB196,IR_PERIB_INTB197,
01223 IR_PERIB_INTB198,IR_PERIB_INTB199,IR_PERIB_INTB200,IR_PERIB_INTB201,IR_PERIB_INTB202,
01224 IR_PERIB_INTB203,IR_PERIB_INTB204,IR_PERIB_INTB205,IR_PERIB_INTB206,IR_PERIB_INTB207,
01225 IR_PERIA_INTA208,IR_PERIA_INTA209,IR_PERIA_INTA210,IR_PERIA_INTA211,IR_PERIA_INTA212,
01226 IR_PERIA_INTA213,IR_PERIA_INTA214,IR_PERIA_INTA215,IR_PERIA_INTA216,IR_PERIA_INTA217,
01227 IR_PERIA_INTA218,IR_PERIA_INTA219,IR_PERIA_INTA220,IR_PERIA_INTA221,IR_PERIA_INTA222,
01228 IR_PERIA_INTA223,IR_PERIA_INTA224,IR_PERIA_INTA225,IR_PERIA_INTA226,IR_PERIA_INTA227,
01229 IR_PERIA_INTA228,IR_PERIA_INTA229,IR_PERIA_INTA230,IR_PERIA_INTA231,IR_PERIA_INTA232,
01230 IR_PERIA_INTA233,IR_PERIA_INTA234,IR_PERIA_INTA235,IR_PERIA_INTA236,IR_PERIA_INTA237,
01231 IR_PERIA_INTA238,IR_PERIA_INTA239,IR_PERIA_INTA240,IR_PERIA_INTA241,IR_PERIA_INTA242,
01232 IR_PERIA_INTA243,IR_PERIA_INTA244,IR_PERIA_INTA245,IR_PERIA_INTA246,IR_PERIA_INTA247,
01233 IR_PERIA_INTA248,IR_PERIA_INTA249,IR_PERIA_INTA250,IR_PERIA_INTA251,IR_PERIA_INTA252,
01234 IR_PERIA_INTA253,IR_PERIA_INTA254,IR_PERIA_INTA255
01235 } enum_ir_t;
```

```
00001 /*
00002 * Copyright (c) 2019(2024,2025) Renesas Electronics Corporation and/or its affiliates
00003 *
00004 * SPDX-License-Identifier: BSD-3-Clause
00005 */
00006 /*****
00007 *
00008 * Device : RX/RX700/RX72N
00009 *
00010 * File Name : iodefne.h
00011 *
00012 * Abstract : Definition of I/O Register.
00013 *
00014 * History : V0.50 (2019-03-15) [Hardware Manual Revision : 0.50]
00015 *           V1.00C (2019-07-17) [Hardware Manual Revision : 1.00]
00016 *           V1.00D (2024-10-25) [Hardware Manual Revision : 1.00]
00017 *           V1.00E (2025-02-14) [Hardware Manual Revision : 1.00]
00018 *
00019 * NOTE : THIS IS A TYPICAL EXAMPLE.
00020 *
00021 *****/
00022 /*****
00023 */
00024 /* DESCRIPTION : Definition of ICU Register */
00025 /* CPU TYPE : RX72N */
00026 /*
00027 /* Usage : IR,DTCE,IER,IPR of ICU Register
00028 /* The following IR, DTCE, IEN, IPR macro functions simplify usage.
00029 /* The bit access operation is "Bit_Name(interrupt source,name)".
00030 /* A part of the name can be omitted.
00031 /* for example :
00032 /* IR(BSC,BUSERR) = 0; expands to :
00033 /* ICU.IR[16].BIT.IR = 0;
00034 /*
00035 /* DTCE(ICU,IRQ0) = 1; expands to :
00036 /* ICU.DTCER[64].BIT.DTCE = 1;
00037 /*
00038 /* IEN(CMT0,CMIO) = 1; expands to :
00039 /* ICU.IER[0x03].BIT.IEN4 = 1;
00040 /*
00041 /* IPR(ICU,SWINT2) = 2; expands to :
00042 /* IPR(ICU,SWI ) = 2; // SWINT2,SWINT share IPR level.
00043 /* ICU.IPR[3].BIT.IPR = 2;
00044 /*
00045 /* Usage : #pragma interrupt Function_Identifier(vect=**)
00046 /* The number of vector is "(interrupt source, name)".
00047 /* for example :
00048 /* #pragma interrupt INT_IRQ0(vect=VECT(ICU,IRQ0)) expands to : */
00049 /* #pragma interrupt INT_IRQ0(vect=64)
00050 /* #pragma interrupt INT_CMT0_CMIO(vect=VECT(CMT0,CMIO)) expands to : */
00051 /* #pragma interrupt INT_CMT0_CMIO(vect=28)
00052 /*
00053 /* Usage : MSTPCRA,MSTPCRB,MSTPCRC of SYSTEM Register
00054 /* The bit access operation is "MSTP(name)".
00055 /* The name that can be used is a macro name defined with "iodefne.h".
00056 /* for example :
00057 /* MSTP(TMR2) = 0; // TMR2,TMR3,TMR23 expands to : */
00058 /* SYSTEM.MSTPCRA.BIT.MSTPA4 = 0;
00059 /* MSTP(SCIO) = 0; // SCIO,SMCIO expands to : */
00060 /* SYSTEM.MSTPCRB.BIT.MSTPB31 = 0;
```

```

00061 /*      MSTP(MTU4) = 0;    // MTU,MTU0,MTU1,MTU2,MTU3,MTU4,... expands to : */
00062 /*      SYSTEM.MSTPCRA.BIT.MSTPA9 = 0;                                */
00063 /*      MSTP(TPU4) = 0;    // TPU0,TPU1,TPU2,TPU3,TPU4,TPU5,TPUA expands to : */
00064 /*      SYSTEM.MSTPCRA.BIT.MSTPA13 = 0;                                */
00065 /*      MSTP(CMT3) = 0;    // CMT2,CMT3                                expands to : */
00066 /*      SYSTEM.MSTPCRA.BIT.MSTPA14 = 0;                                */
00067 /*                                                                */
00068 /*                                                                */
00069 /******/
00070 #ifndef __RX72NIODEFINE_HEADER__
00071 #define __RX72NIODEFINE_HEADER__
00072
00073 #define IEN_BSC_BUSERR      IEN0
00074 #define IEN_ICU_GROUPIE0    IEN1
00075 #define IEN_RAM_RAMERR      IEN2
00076 #define IEN_FCU_FIFERR      IEN5
00077 #define IEN_FCU_FRDYI       IEN7
00078 #define IEN_ICU_SWINT2      IEN2
00079 #define IEN_ICU_SWINT       IEN3
00080 #define IEN_CMT0_CMI0       IEN4
00081 #define IEN_CMT1_CMI1       IEN5
00082 #define IEN_CMTW0_CMW10     IEN6
00083 #define IEN_CMTW1_CMW11     IEN7
00084 #define IEN_USB0_D0FIFO0    IEN2
00085 #define IEN_USB0_D1FIFO0    IEN3
00086 #define IEN_RSPI0_SPRI0     IEN6
00087 #define IEN_RSPI0_SPTI0     IEN7
00088 #define IEN_RSPI1_SPRI1     IEN0
00089 #define IEN_RSPI1_SPTI1     IEN1
00090 #define IEN_QSPI_SPRI       IEN2
00091 #define IEN_QSPI_SPTI       IEN3
00092 #define IEN_SDHI_SBFBI      IEN4
00093 #define IEN_MMCIF_MBFBI     IEN5
00094 #define IEN_SSIE0_SSIRXI0    IEN6
00095 #define IEN_SSIE0_SSIRXI0    IEN7
00096 #define IEN_SSIE1_SSIRTI1    IEN0
00097 #define IEN_RIIC1_RXI1       IEN2
00098 #define IEN_RIIC1_TXI1       IEN3
00099 #define IEN_RIIC0_RXI0       IEN4
00100 #define IEN_RIIC0_TXI0       IEN5
00101 #define IEN_RIIC2_RXI2       IEN6
00102 #define IEN_RIIC2_TXI2       IEN7
00103 #define IEN_SCI0_RXI0        IEN2
00104 #define IEN_SCI0_TXI0        IEN3
00105 #define IEN_SCI1_RXI1        IEN4
00106 #define IEN_SCI1_TXI1        IEN5
00107 #define IEN_SCI2_RXI2        IEN6
00108 #define IEN_SCI2_TXI2        IEN7
00109 #define IEN_ICU_IRQ0         IEN0
00110 #define IEN_ICU_IRQ1         IEN1
00111 #define IEN_ICU_IRQ2         IEN2
00112 #define IEN_ICU_IRQ3         IEN3
00113 #define IEN_ICU_IRQ4         IEN4
00114 #define IEN_ICU_IRQ5         IEN5
00115 #define IEN_ICU_IRQ6         IEN6
00116 #define IEN_ICU_IRQ7         IEN7
00117 #define IEN_ICU_IRQ8         IEN0
00118 #define IEN_ICU_IRQ9         IEN1
00119 #define IEN_ICU_IRQ10        IEN2
00120 #define IEN_ICU_IRQ11        IEN3
00121 #define IEN_ICU_IRQ12        IEN4
00122 #define IEN_ICU_IRQ13        IEN5
00123 #define IEN_ICU_IRQ14        IEN6
00124 #define IEN_ICU_IRQ15        IEN7
00125 #define IEN_SCI3_RXI3        IEN0
00126 #define IEN_SCI3_TXI3        IEN1
00127 #define IEN_SCI4_RXI4        IEN2
00128 #define IEN_SCI4_TXI4        IEN3
00129 #define IEN_SCI5_RXI5        IEN4
00130 #define IEN_SCI5_TXI5        IEN5
00131 #define IEN_SCI6_RXI6        IEN6
00132 #define IEN_SCI6_TXI6        IEN7
00133 #define IEN_LVD1_LVD1        IEN0
00134 #define IEN_LVD2_LVD2        IEN1
00135 #define IEN_USB0_USBR0       IEN2
00136 #define IEN_RTC_ALM          IEN4
00137 #define IEN_RTC_PRD          IEN5
00138 #define IEN_IWDT_IWUNI       IEN7
00139 #define IEN_WDT_WUNI         IEN0
00140 #define IEN_PDC_PCDFI        IEN1
00141 #define IEN_SCI7_RXI7        IEN2
00142 #define IEN_SCI7_TXI7        IEN3
00143 #define IEN_SCI8_RXI8        IEN4
00144 #define IEN_SCI8_TXI8        IEN5
00145 #define IEN_SCI9_RXI9        IEN6
00146 #define IEN_SCI9_TXI9        IEN7
00147 #define IEN_SCI10_RXI10       IEN0

```

```
00148 #define IEN_SCI10_TXI10    IEN1
00149 #define IEN_ICU_GROUPBE0    IEN2
00150 #define IEN_ICU_GROUPBL2    IEN3
00151 #define IEN_RSPI2_SPRI2     IEN4
00152 #define IEN_RSPI2_SPTI2     IEN5
00153 #define IEN_ICU_GROUPBL0    IEN6
00154 #define IEN_ICU_GROUPBL1    IEN7
00155 #define IEN_ICU_GROUPAL0    IEN0
00156 #define IEN_ICU_GROUPAL1    IEN1
00157 #define IEN_SCI11_RXI11     IEN2
00158 #define IEN_SCI11_TXI11     IEN3
00159 #define IEN_SCI12_RXI12     IEN4
00160 #define IEN_SCI12_TXI12     IEN5
00161 #define IEN_DMAC_DMAC0I     IEN0
00162 #define IEN_DMAC_DMAC1I     IEN1
00163 #define IEN_DMAC_DMAC2I     IEN2
00164 #define IEN_DMAC_DMAC3I     IEN3
00165 #define IEN_DMAC_DMAC74I    IEN4
00166 #define IEN_OST_OSTDI       IEN5
00167 #define IEN_EXDMAC_EXDMAC0I IEN6
00168 #define IEN_EXDMAC_EXDMAC1I IEN7
00169 #define IEN_PERIB_INTB128    IEN0
00170 #define IEN_PERIB_INTB129    IEN1
00171 #define IEN_PERIB_INTB130    IEN2
00172 #define IEN_PERIB_INTB131    IEN3
00173 #define IEN_PERIB_INTB132    IEN4
00174 #define IEN_PERIB_INTB133    IEN5
00175 #define IEN_PERIB_INTB134    IEN6
00176 #define IEN_PERIB_INTB135    IEN7
00177 #define IEN_PERIB_INTB136    IEN0
00178 #define IEN_PERIB_INTB137    IEN1
00179 #define IEN_PERIB_INTB138    IEN2
00180 #define IEN_PERIB_INTB139    IEN3
00181 #define IEN_PERIB_INTB140    IEN4
00182 #define IEN_PERIB_INTB141    IEN5
00183 #define IEN_PERIB_INTB142    IEN6
00184 #define IEN_PERIB_INTB143    IEN7
00185 #define IEN_PERIB_INTB144    IEN0
00186 #define IEN_PERIB_INTB145    IEN1
00187 #define IEN_PERIB_INTB146    IEN2
00188 #define IEN_PERIB_INTB147    IEN3
00189 #define IEN_PERIB_INTB148    IEN4
00190 #define IEN_PERIB_INTB149    IEN5
00191 #define IEN_PERIB_INTB150    IEN6
00192 #define IEN_PERIB_INTB151    IEN7
00193 #define IEN_PERIB_INTB152    IEN0
00194 #define IEN_PERIB_INTB153    IEN1
00195 #define IEN_PERIB_INTB154    IEN2
00196 #define IEN_PERIB_INTB155    IEN3
00197 #define IEN_PERIB_INTB156    IEN4
00198 #define IEN_PERIB_INTB157    IEN5
00199 #define IEN_PERIB_INTB158    IEN6
00200 #define IEN_PERIB_INTB159    IEN7
00201 #define IEN_PERIB_INTB160    IEN0
00202 #define IEN_PERIB_INTB161    IEN1
00203 #define IEN_PERIB_INTB162    IEN2
00204 #define IEN_PERIB_INTB163    IEN3
00205 #define IEN_PERIB_INTB164    IEN4
00206 #define IEN_PERIB_INTB165    IEN5
00207 #define IEN_PERIB_INTB166    IEN6
00208 #define IEN_PERIB_INTB167    IEN7
00209 #define IEN_PERIB_INTB168    IEN0
00210 #define IEN_PERIB_INTB169    IEN1
00211 #define IEN_PERIB_INTB170    IEN2
00212 #define IEN_PERIB_INTB171    IEN3
00213 #define IEN_PERIB_INTB172    IEN4
00214 #define IEN_PERIB_INTB173    IEN5
00215 #define IEN_PERIB_INTB174    IEN6
00216 #define IEN_PERIB_INTB175    IEN7
00217 #define IEN_PERIB_INTB176    IEN0
00218 #define IEN_PERIB_INTB177    IEN1
00219 #define IEN_PERIB_INTB178    IEN2
00220 #define IEN_PERIB_INTB179    IEN3
00221 #define IEN_PERIB_INTB180    IEN4
00222 #define IEN_PERIB_INTB181    IEN5
00223 #define IEN_PERIB_INTB182    IEN6
00224 #define IEN_PERIB_INTB183    IEN7
00225 #define IEN_PERIB_INTB184    IEN0
00226 #define IEN_PERIB_INTB185    IEN1
00227 #define IEN_PERIB_INTB186    IEN2
00228 #define IEN_PERIB_INTB187    IEN3
00229 #define IEN_PERIB_INTB188    IEN4
00230 #define IEN_PERIB_INTB189    IEN5
00231 #define IEN_PERIB_INTB190    IEN6
00232 #define IEN_PERIB_INTB191    IEN7
00233 #define IEN_PERIB_INTB192    IEN0
00234 #define IEN_PERIB_INTB193    IEN1
```

```
00235 #define IEN_PERIB_INTB194 IEN2
00236 #define IEN_PERIB_INTB195 IEN3
00237 #define IEN_PERIB_INTB196 IEN4
00238 #define IEN_PERIB_INTB197 IEN5
00239 #define IEN_PERIB_INTB198 IEN6
00240 #define IEN_PERIB_INTB199 IEN7
00241 #define IEN_PERIB_INTB200 IEN0
00242 #define IEN_PERIB_INTB201 IEN1
00243 #define IEN_PERIB_INTB202 IEN2
00244 #define IEN_PERIB_INTB203 IEN3
00245 #define IEN_PERIB_INTB204 IEN4
00246 #define IEN_PERIB_INTB205 IEN5
00247 #define IEN_PERIB_INTB206 IEN6
00248 #define IEN_PERIB_INTB207 IEN7
00249 #define IEN_PERIA_INTA208 IEN0
00250 #define IEN_PERIA_INTA209 IEN1
00251 #define IEN_PERIA_INTA210 IEN2
00252 #define IEN_PERIA_INTA211 IEN3
00253 #define IEN_PERIA_INTA212 IEN4
00254 #define IEN_PERIA_INTA213 IEN5
00255 #define IEN_PERIA_INTA214 IEN6
00256 #define IEN_PERIA_INTA215 IEN7
00257 #define IEN_PERIA_INTA216 IEN0
00258 #define IEN_PERIA_INTA217 IEN1
00259 #define IEN_PERIA_INTA218 IEN2
00260 #define IEN_PERIA_INTA219 IEN3
00261 #define IEN_PERIA_INTA220 IEN4
00262 #define IEN_PERIA_INTA221 IEN5
00263 #define IEN_PERIA_INTA222 IEN6
00264 #define IEN_PERIA_INTA223 IEN7
00265 #define IEN_PERIA_INTA224 IEN0
00266 #define IEN_PERIA_INTA225 IEN1
00267 #define IEN_PERIA_INTA226 IEN2
00268 #define IEN_PERIA_INTA227 IEN3
00269 #define IEN_PERIA_INTA228 IEN4
00270 #define IEN_PERIA_INTA229 IEN5
00271 #define IEN_PERIA_INTA230 IEN6
00272 #define IEN_PERIA_INTA231 IEN7
00273 #define IEN_PERIA_INTA232 IEN0
00274 #define IEN_PERIA_INTA233 IEN1
00275 #define IEN_PERIA_INTA234 IEN2
00276 #define IEN_PERIA_INTA235 IEN3
00277 #define IEN_PERIA_INTA236 IEN4
00278 #define IEN_PERIA_INTA237 IEN5
00279 #define IEN_PERIA_INTA238 IEN6
00280 #define IEN_PERIA_INTA239 IEN7
00281 #define IEN_PERIA_INTA240 IEN0
00282 #define IEN_PERIA_INTA241 IEN1
00283 #define IEN_PERIA_INTA242 IEN2
00284 #define IEN_PERIA_INTA243 IEN3
00285 #define IEN_PERIA_INTA244 IEN4
00286 #define IEN_PERIA_INTA245 IEN5
00287 #define IEN_PERIA_INTA246 IEN6
00288 #define IEN_PERIA_INTA247 IEN7
00289 #define IEN_PERIA_INTA248 IEN0
00290 #define IEN_PERIA_INTA249 IEN1
00291 #define IEN_PERIA_INTA250 IEN2
00292 #define IEN_PERIA_INTA251 IEN3
00293 #define IEN_PERIA_INTA252 IEN4
00294 #define IEN_PERIA_INTA253 IEN5
00295 #define IEN_PERIA_INTA254 IEN6
00296 #define IEN_PERIA_INTA255 IEN7
00297
00298 #define VECT_BSC_BUSERR 16
00299 #define VECT_ICU_GROUPIE0 17
00300 #define VECT_RAM_RAMERR 18
00301 #define VECT_FCU_FIFERR 21
00302 #define VECT_FCU_FRDYI 23
00303 #define VECT_ICU_SWINT2 26
00304 #define VECT_ICU_SWINT 27
00305 #define VECT_CMT0_CMIO 28
00306 #define VECT_CMT1_CMI1 29
00307 #define VECT_CMTW0_CMWIO 30
00308 #define VECT_CMTW1_CMWI1 31
00309 #define VECT_USB0_D0FIFO0 34
00310 #define VECT_USB0_D1FIFO0 35
00311 #define VECT_RSPIO_SPRI0 38
00312 #define VECT_RSPIO_SPTI0 39
00313 #define VECT_RSPI1_SPRI1 40
00314 #define VECT_RSPI1_SPTI1 41
00315 #define VECT_QSPI_SPRI 42
00316 #define VECT_QSPI_SPTI 43
00317 #define VECT_SDHI_SBFBI 44
00318 #define VECT_MMCI_F_MBFBI 45
00319 #define VECT_SSIE0_SSITXI0 46
00320 #define VECT_SSIE0_SSIRXI0 47
00321 #define VECT_SSIE1_SSIRTI1 48
```

```
00322 #define VECT_RIIC1_RXI1    50
00323 #define VECT_RIIC1_TXI1    51
00324 #define VECT_RIIC0_RXI0    52
00325 #define VECT_RIIC0_TXI0    53
00326 #define VECT_RIIC2_RXI2    54
00327 #define VECT_RIIC2_TXI2    55
00328 #define VECT_SCI0_RXI0      58
00329 #define VECT_SCI0_TXI0      59
00330 #define VECT_SCI1_RXI1      60
00331 #define VECT_SCI1_TXI1      61
00332 #define VECT_SCI2_RXI2      62
00333 #define VECT_SCI2_TXI2      63
00334 #define VECT_ICU_IRQ0       64
00335 #define VECT_ICU_IRQ1       65
00336 #define VECT_ICU_IRQ2       66
00337 #define VECT_ICU_IRQ3       67
00338 #define VECT_ICU_IRQ4       68
00339 #define VECT_ICU_IRQ5       69
00340 #define VECT_ICU_IRQ6       70
00341 #define VECT_ICU_IRQ7       71
00342 #define VECT_ICU_IRQ8       72
00343 #define VECT_ICU_IRQ9       73
00344 #define VECT_ICU_IRQ10      74
00345 #define VECT_ICU_IRQ11      75
00346 #define VECT_ICU_IRQ12      76
00347 #define VECT_ICU_IRQ13      77
00348 #define VECT_ICU_IRQ14      78
00349 #define VECT_ICU_IRQ15      79
00350 #define VECT_SCI3_RXI3       80
00351 #define VECT_SCI3_TXI3       81
00352 #define VECT_SCI4_RXI4       82
00353 #define VECT_SCI4_TXI4       83
00354 #define VECT_SCI5_RXI5       84
00355 #define VECT_SCI5_TXI5       85
00356 #define VECT_SCI6_RXI6       86
00357 #define VECT_SCI6_TXI6       87
00358 #define VECT_LVD1_LVD1      88
00359 #define VECT_LVD2_LVD2      89
00360 #define VECT_USB0_USBR0     90
00361 #define VECT_RTC_ALM        92
00362 #define VECT_RTC_PRD        93
00363 #define VECT_IWDT_IWUNI     95
00364 #define VECT_WDT_WUNI       96
00365 #define VECT_PDC_PCDFI      97
00366 #define VECT_SCI7_RXI7       98
00367 #define VECT_SCI7_TXI7       99
00368 #define VECT_SCI8_RXI8      100
00369 #define VECT_SCI8_TXI8      101
00370 #define VECT_SCI9_RXI9      102
00371 #define VECT_SCI9_TXI9      103
00372 #define VECT_SCI10_RXI10     104
00373 #define VECT_SCI10_TXI10     105
00374 #define VECT_ICU_GROUPBE0    106
00375 #define VECT_ICU_GROUPBL2    107
00376 #define VECT_RSPI2_SPRI2     108
00377 #define VECT_RSPI2_SPTI2     109
00378 #define VECT_ICU_GROUPBL0    110
00379 #define VECT_ICU_GROUPBL1    111
00380 #define VECT_ICU_GROUPPAL0    112
00381 #define VECT_ICU_GROUPPAL1    113
00382 #define VECT_SCI11_RXI11     114
00383 #define VECT_SCI11_TXI11     115
00384 #define VECT_SCI12_RXI12     116
00385 #define VECT_SCI12_TXI12     117
00386 #define VECT_DMACE0_DMACE0I  120
00387 #define VECT_DMACE0_DMACE0I  121
00388 #define VECT_DMACE0_DMACE0I  122
00389 #define VECT_DMACE0_DMACE0I  123
00390 #define VECT_DMACE0_DMACE0I  124
00391 #define VECT_OST_OSTDI       125
00392 #define VECT_EXDMACE0_EXDMACE0I 126
00393 #define VECT_EXDMACE0_EXDMACE0I 127
00394 #define VECT_PERIB_INTB128    128
00395 #define VECT_PERIB_INTB129    129
00396 #define VECT_PERIB_INTB130    130
00397 #define VECT_PERIB_INTB131    131
00398 #define VECT_PERIB_INTB132    132
00399 #define VECT_PERIB_INTB133    133
00400 #define VECT_PERIB_INTB134    134
00401 #define VECT_PERIB_INTB135    135
00402 #define VECT_PERIB_INTB136    136
00403 #define VECT_PERIB_INTB137    137
00404 #define VECT_PERIB_INTB138    138
00405 #define VECT_PERIB_INTB139    139
00406 #define VECT_PERIB_INTB140    140
00407 #define VECT_PERIB_INTB141    141
00408 #define VECT_PERIB_INTB142    142
```

```
00409 #define VECT_PERIB_INTB143 143
00410 #define VECT_PERIB_INTB144 144
00411 #define VECT_PERIB_INTB145 145
00412 #define VECT_PERIB_INTB146 146
00413 #define VECT_PERIB_INTB147 147
00414 #define VECT_PERIB_INTB148 148
00415 #define VECT_PERIB_INTB149 149
00416 #define VECT_PERIB_INTB150 150
00417 #define VECT_PERIB_INTB151 151
00418 #define VECT_PERIB_INTB152 152
00419 #define VECT_PERIB_INTB153 153
00420 #define VECT_PERIB_INTB154 154
00421 #define VECT_PERIB_INTB155 155
00422 #define VECT_PERIB_INTB156 156
00423 #define VECT_PERIB_INTB157 157
00424 #define VECT_PERIB_INTB158 158
00425 #define VECT_PERIB_INTB159 159
00426 #define VECT_PERIB_INTB160 160
00427 #define VECT_PERIB_INTB161 161
00428 #define VECT_PERIB_INTB162 162
00429 #define VECT_PERIB_INTB163 163
00430 #define VECT_PERIB_INTB164 164
00431 #define VECT_PERIB_INTB165 165
00432 #define VECT_PERIB_INTB166 166
00433 #define VECT_PERIB_INTB167 167
00434 #define VECT_PERIB_INTB168 168
00435 #define VECT_PERIB_INTB169 169
00436 #define VECT_PERIB_INTB170 170
00437 #define VECT_PERIB_INTB171 171
00438 #define VECT_PERIB_INTB172 172
00439 #define VECT_PERIB_INTB173 173
00440 #define VECT_PERIB_INTB174 174
00441 #define VECT_PERIB_INTB175 175
00442 #define VECT_PERIB_INTB176 176
00443 #define VECT_PERIB_INTB177 177
00444 #define VECT_PERIB_INTB178 178
00445 #define VECT_PERIB_INTB179 179
00446 #define VECT_PERIB_INTB180 180
00447 #define VECT_PERIB_INTB181 181
00448 #define VECT_PERIB_INTB182 182
00449 #define VECT_PERIB_INTB183 183
00450 #define VECT_PERIB_INTB184 184
00451 #define VECT_PERIB_INTB185 185
00452 #define VECT_PERIB_INTB186 186
00453 #define VECT_PERIB_INTB187 187
00454 #define VECT_PERIB_INTB188 188
00455 #define VECT_PERIB_INTB189 189
00456 #define VECT_PERIB_INTB190 190
00457 #define VECT_PERIB_INTB191 191
00458 #define VECT_PERIB_INTB192 192
00459 #define VECT_PERIB_INTB193 193
00460 #define VECT_PERIB_INTB194 194
00461 #define VECT_PERIB_INTB195 195
00462 #define VECT_PERIB_INTB196 196
00463 #define VECT_PERIB_INTB197 197
00464 #define VECT_PERIB_INTB198 198
00465 #define VECT_PERIB_INTB199 199
00466 #define VECT_PERIB_INTB200 200
00467 #define VECT_PERIB_INTB201 201
00468 #define VECT_PERIB_INTB202 202
00469 #define VECT_PERIB_INTB203 203
00470 #define VECT_PERIB_INTB204 204
00471 #define VECT_PERIB_INTB205 205
00472 #define VECT_PERIB_INTB206 206
00473 #define VECT_PERIB_INTB207 207
00474 #define VECT_PERIA_INTA208 208
00475 #define VECT_PERIA_INTA209 209
00476 #define VECT_PERIA_INTA210 210
00477 #define VECT_PERIA_INTA211 211
00478 #define VECT_PERIA_INTA212 212
00479 #define VECT_PERIA_INTA213 213
00480 #define VECT_PERIA_INTA214 214
00481 #define VECT_PERIA_INTA215 215
00482 #define VECT_PERIA_INTA216 216
00483 #define VECT_PERIA_INTA217 217
00484 #define VECT_PERIA_INTA218 218
00485 #define VECT_PERIA_INTA219 219
00486 #define VECT_PERIA_INTA220 220
00487 #define VECT_PERIA_INTA221 221
00488 #define VECT_PERIA_INTA222 222
00489 #define VECT_PERIA_INTA223 223
00490 #define VECT_PERIA_INTA224 224
00491 #define VECT_PERIA_INTA225 225
00492 #define VECT_PERIA_INTA226 226
00493 #define VECT_PERIA_INTA227 227
00494 #define VECT_PERIA_INTA228 228
00495 #define VECT_PERIA_INTA229 229
```

```
00496 #define VECT_PERIA_INTA230 230
00497 #define VECT_PERIA_INTA231 231
00498 #define VECT_PERIA_INTA232 232
00499 #define VECT_PERIA_INTA233 233
00500 #define VECT_PERIA_INTA234 234
00501 #define VECT_PERIA_INTA235 235
00502 #define VECT_PERIA_INTA236 236
00503 #define VECT_PERIA_INTA237 237
00504 #define VECT_PERIA_INTA238 238
00505 #define VECT_PERIA_INTA239 239
00506 #define VECT_PERIA_INTA240 240
00507 #define VECT_PERIA_INTA241 241
00508 #define VECT_PERIA_INTA242 242
00509 #define VECT_PERIA_INTA243 243
00510 #define VECT_PERIA_INTA244 244
00511 #define VECT_PERIA_INTA245 245
00512 #define VECT_PERIA_INTA246 246
00513 #define VECT_PERIA_INTA247 247
00514 #define VECT_PERIA_INTA248 248
00515 #define VECT_PERIA_INTA249 249
00516 #define VECT_PERIA_INTA250 250
00517 #define VECT_PERIA_INTA251 251
00518 #define VECT_PERIA_INTA252 252
00519 #define VECT_PERIA_INTA253 253
00520 #define VECT_PERIA_INTA254 254
00521 #define VECT_PERIA_INTA255 255
00522
00523 #define MSTP_EXDMAC SYSTEM.MSTPCRA.BIT.MSTPA29
00524 #define MSTP_EXDMAC0 SYSTEM.MSTPCRA.BIT.MSTPA29
00525 #define MSTP_EXDMAC1 SYSTEM.MSTPCRA.BIT.MSTPA29
00526 #define MSTP_DMAC SYSTEM.MSTPCRA.BIT.MSTPA28
00527 #define MSTP_DMAC0 SYSTEM.MSTPCRA.BIT.MSTPA28
00528 #define MSTP_DMAC1 SYSTEM.MSTPCRA.BIT.MSTPA28
00529 #define MSTP_DMAC2 SYSTEM.MSTPCRA.BIT.MSTPA28
00530 #define MSTP_DMAC3 SYSTEM.MSTPCRA.BIT.MSTPA28
00531 #define MSTP_DMAC4 SYSTEM.MSTPCRA.BIT.MSTPA28
00532 #define MSTP_DMAC5 SYSTEM.MSTPCRA.BIT.MSTPA28
00533 #define MSTP_DMAC6 SYSTEM.MSTPCRA.BIT.MSTPA28
00534 #define MSTP_DMAC7 SYSTEM.MSTPCRA.BIT.MSTPA28
00535 #define MSTP_DTC SYSTEM.MSTPCRA.BIT.MSTPA28
00536 #define MSTP_DA SYSTEM.MSTPCRA.BIT.MSTPA19
00537 #define MSTP_S12AD SYSTEM.MSTPCRA.BIT.MSTPA17
00538 #define MSTP_S12AD1 SYSTEM.MSTPCRA.BIT.MSTPA16
00539 #define MSTP_CMT0 SYSTEM.MSTPCRA.BIT.MSTPA15
00540 #define MSTP_CMT1 SYSTEM.MSTPCRA.BIT.MSTPA15
00541 #define MSTP_CMT2 SYSTEM.MSTPCRA.BIT.MSTPA14
00542 #define MSTP_CMT3 SYSTEM.MSTPCRA.BIT.MSTPA14
00543 #define MSTP_TPU0 SYSTEM.MSTPCRA.BIT.MSTPA13
00544 #define MSTP_TPU1 SYSTEM.MSTPCRA.BIT.MSTPA13
00545 #define MSTP_TPU2 SYSTEM.MSTPCRA.BIT.MSTPA13
00546 #define MSTP_TPU3 SYSTEM.MSTPCRA.BIT.MSTPA13
00547 #define MSTP_TPU4 SYSTEM.MSTPCRA.BIT.MSTPA13
00548 #define MSTP_TPU5 SYSTEM.MSTPCRA.BIT.MSTPA13
00549 #define MSTP_TPUA SYSTEM.MSTPCRA.BIT.MSTPA13
00550 #define MSTP_PPG0 SYSTEM.MSTPCRA.BIT.MSTPA11
00551 #define MSTP_PPG1 SYSTEM.MSTPCRA.BIT.MSTPA10
00552 #define MSTP_MTU SYSTEM.MSTPCRA.BIT.MSTPA9
00553 #define MSTP_MTU0 SYSTEM.MSTPCRA.BIT.MSTPA9
00554 #define MSTP_MTU1 SYSTEM.MSTPCRA.BIT.MSTPA9
00555 #define MSTP_MTU2 SYSTEM.MSTPCRA.BIT.MSTPA9
00556 #define MSTP_MTU3 SYSTEM.MSTPCRA.BIT.MSTPA9
00557 #define MSTP_MTU4 SYSTEM.MSTPCRA.BIT.MSTPA9
00558 #define MSTP_MTU5 SYSTEM.MSTPCRA.BIT.MSTPA9
00559 #define MSTP_MTU6 SYSTEM.MSTPCRA.BIT.MSTPA9
00560 #define MSTP_MTU7 SYSTEM.MSTPCRA.BIT.MSTPA9
00561 #define MSTP_MTU8 SYSTEM.MSTPCRA.BIT.MSTPA9
00562 #define MSTP_GPTW SYSTEM.MSTPCRA.BIT.MSTPA7
00563 #define MSTP_GPTW0 SYSTEM.MSTPCRA.BIT.MSTPA7
00564 #define MSTP_GPTW1 SYSTEM.MSTPCRA.BIT.MSTPA7
00565 #define MSTP_GPTW2 SYSTEM.MSTPCRA.BIT.MSTPA7
00566 #define MSTP_GPTW3 SYSTEM.MSTPCRA.BIT.MSTPA7
00567 #define MSTP_POEG SYSTEM.MSTPCRA.BIT.MSTPA7
00568 #define MSTP_TMR0 SYSTEM.MSTPCRA.BIT.MSTPA5
00569 #define MSTP_TMR1 SYSTEM.MSTPCRA.BIT.MSTPA5
00570 #define MSTP_TMR01 SYSTEM.MSTPCRA.BIT.MSTPA5
00571 #define MSTP_TMR2 SYSTEM.MSTPCRA.BIT.MSTPA4
00572 #define MSTP_TMR3 SYSTEM.MSTPCRA.BIT.MSTPA4
00573 #define MSTP_TMR23 SYSTEM.MSTPCRA.BIT.MSTPA4
00574 #define MSTP_CMTW0 SYSTEM.MSTPCRA.BIT.MSTPA1
00575 #define MSTP_CMTW1 SYSTEM.MSTPCRA.BIT.MSTPA0
00576 #define MSTP_SCI0 SYSTEM.MSTPCRB.BIT.MSTPB31
00577 #define MSTP_SMCIO SYSTEM.MSTPCRB.BIT.MSTPB31
00578 #define MSTP_SCI1 SYSTEM.MSTPCRB.BIT.MSTPB30
00579 #define MSTP_SMCII SYSTEM.MSTPCRB.BIT.MSTPB30
00580 #define MSTP_SCI2 SYSTEM.MSTPCRB.BIT.MSTPB29
00581 #define MSTP_SMCI2 SYSTEM.MSTPCRB.BIT.MSTPB29
00582 #define MSTP_SCI3 SYSTEM.MSTPCRB.BIT.MSTPB28
```

```

00583 #define MSTP_SMCI3    SYSTEM.MSTPCRB.BIT.MSTPB28
00584 #define MSTP_SCI4     SYSTEM.MSTPCRB.BIT.MSTPB27
00585 #define MSTP_SMCI4    SYSTEM.MSTPCRB.BIT.MSTPB27
00586 #define MSTP_SCI5     SYSTEM.MSTPCRB.BIT.MSTPB26
00587 #define MSTP_SMCI5    SYSTEM.MSTPCRB.BIT.MSTPB26
00588 #define MSTP_SCI6     SYSTEM.MSTPCRB.BIT.MSTPB25
00589 #define MSTP_SMCI6    SYSTEM.MSTPCRB.BIT.MSTPB25
00590 #define MSTP_SCI7     SYSTEM.MSTPCRB.BIT.MSTPB24
00591 #define MSTP_SMCI7    SYSTEM.MSTPCRB.BIT.MSTPB24
00592 #define MSTP_CRC       SYSTEM.MSTPCRB.BIT.MSTPB23
00593 #define MSTP_PDC       SYSTEM.MSTPCRB.BIT.MSTPB22
00594 #define MSTP_RIIC0    SYSTEM.MSTPCRB.BIT.MSTPB21
00595 #define MSTP_RIIC1    SYSTEM.MSTPCRB.BIT.MSTPB20
00596 #define MSTP_USB0     SYSTEM.MSTPCRB.BIT.MSTPB19
00597 #define MSTP_RSPI0    SYSTEM.MSTPCRB.BIT.MSTPB17
00598 #define MSTP_RSPI1    SYSTEM.MSTPCRB.BIT.MSTPB16
00599 #define MSTP_ETHERC0   SYSTEM.MSTPCRB.BIT.MSTPB15
00600 #define MSTP_EDMAC0    SYSTEM.MSTPCRB.BIT.MSTPB15
00601 #define MSTP_PMG10    SYSTEM.MSTPCRB.BIT.MSTPB15
00602 #define MSTP_ETHERC1   SYSTEM.MSTPCRB.BIT.MSTPB14
00603 #define MSTP_EDMAC1    SYSTEM.MSTPCRB.BIT.MSTPB14
00604 #define MSTP_PMG11    SYSTEM.MSTPCRB.BIT.MSTPB14
00605 #define MSTP_EPTPC     SYSTEM.MSTPCRB.BIT.MSTPB13
00606 #define MSTP_EPTPC0    SYSTEM.MSTPCRB.BIT.MSTPB13
00607 #define MSTP_EPTPC1    SYSTEM.MSTPCRB.BIT.MSTPB13
00608 #define MSTP_PTPEDMAC  SYSTEM.MSTPCRB.BIT.MSTPB13
00609 #define MSTP_ELC       SYSTEM.MSTPCRB.BIT.MSTPB9
00610 #define MSTP_TEMPS      SYSTEM.MSTPCRB.BIT.MSTPB8
00611 #define MSTP_DOC       SYSTEM.MSTPCRB.BIT.MSTPB6
00612 #define MSTP_SCI12     SYSTEM.MSTPCRB.BIT.MSTPB4
00613 #define MSTP_SMCI12    SYSTEM.MSTPCRB.BIT.MSTPB4
00614 #define MSTP_CAN2      SYSTEM.MSTPCRB.BIT.MSTPB2
00615 #define MSTP_CAN1      SYSTEM.MSTPCRB.BIT.MSTPB1
00616 #define MSTP_CAN0      SYSTEM.MSTPCRB.BIT.MSTPB0
00617 #define MSTP_GLCDC     SYSTEM.MSTPCRC.BIT.MSTPC29
00618 #define MSTP_DRW2D     SYSTEM.MSTPCRC.BIT.MSTPC28
00619 #define MSTP_SCI8      SYSTEM.MSTPCRC.BIT.MSTPC27
00620 #define MSTP_SMCI8     SYSTEM.MSTPCRC.BIT.MSTPC27
00621 #define MSTP_SCI9      SYSTEM.MSTPCRC.BIT.MSTPC26
00622 #define MSTP_SMCI9     SYSTEM.MSTPCRC.BIT.MSTPC26
00623 #define MSTP_SCI10     SYSTEM.MSTPCRC.BIT.MSTPC25
00624 #define MSTP_SMCI10    SYSTEM.MSTPCRC.BIT.MSTPC25
00625 #define MSTP_SCI11     SYSTEM.MSTPCRC.BIT.MSTPC24
00626 #define MSTP_SMCI11    SYSTEM.MSTPCRC.BIT.MSTPC24
00627 #define MSTP_QSPI      SYSTEM.MSTPCRC.BIT.MSTPC23
00628 #define MSTP_RSPI2     SYSTEM.MSTPCRC.BIT.MSTPC22
00629 #define MSTP_CAC        SYSTEM.MSTPCRC.BIT.MSTPC19
00630 #define MSTP_RIIC2     SYSTEM.MSTPCRC.BIT.MSTPC17
00631 #define MSTP_STBYRAM   SYSTEM.MSTPCRC.BIT.MSTPC7
00632 #define MSTP_ECCRAM    SYSTEM.MSTPCRC.BIT.MSTPC6
00633 #define MSTP_RAM2      SYSTEM.MSTPCRC.BIT.MSTPC2
00634 #define MSTP_RAM0      SYSTEM.MSTPCRC.BIT.MSTPC0
00635 #define MSTP_TSIP      SYSTEM.MSTPCRD.BIT.MSTPD27
00636 #define MSTP_MMCIIF    SYSTEM.MSTPCRD.BIT.MSTPD21
00637 #define MSTP_SDHI      SYSTEM.MSTPCRD.BIT.MSTPD19
00638 #define MSTP_SSIE0     SYSTEM.MSTPCRD.BIT.MSTPD15
00639 #define MSTP_SSIE1     SYSTEM.MSTPCRD.BIT.MSTPD14
00640
00641 #define IS_DPFPU_DPFPUEX    IS0
00642 #define IS_CAN0_ERS0        IS0
00643 #define IS_CAN1_ERS1        IS1
00644 #define IS_CAN2_ERS2        IS2
00645 #define IS_SCI0_TEI0        IS0
00646 #define IS_SCI0_ERI0        IS1
00647 #define IS_SCI1_TEI1        IS2
00648 #define IS_SCI1_ERI1        IS3
00649 #define IS_SCI2_TEI2        IS4
00650 #define IS_SCI2_ERI2        IS5
00651 #define IS_SCI3_TEI3        IS6
00652 #define IS_SCI3_ERI3        IS7
00653 #define IS_SCI4_TEI4        IS8
00654 #define IS_SCI4_ERI4        IS9
00655 #define IS_SCI5_TEI5        IS10
00656 #define IS_SCI5_ERI5        IS11
00657 #define IS_SCI6_TEI6        IS12
00658 #define IS_SCI6_ERI6        IS13
00659 #define IS_SCI12_TEI12      IS16
00660 #define IS_SCI12_ERI12      IS17
00661 #define IS_SCI12_SCIX0      IS18
00662 #define IS_SCI12_SCIX1      IS19
00663 #define IS_SCI12_SCIX2      IS20
00664 #define IS_SCI12_SCIX3      IS21
00665 #define IS_QSPI_QSPSLI      IS24
00666 #define IS_CAC_FERRI        IS26
00667 #define IS_CAC_MENDI        IS27
00668 #define IS_CAC_OVFI         IS28
00669 #define IS_DOC_DOPCI        IS29

```

```

00670 #define IS_PDC_PCFEI      IS30
00671 #define IS_PDC_PCERI      IS31
00672 #define IS_SDHI_CDETI     IS3
00673 #define IS_SDHI_CACI      IS4
00674 #define IS_SDHI_SDACI     IS5
00675 #define IS_MMCIF_CDETIO    IS6
00676 #define IS_MMCIF_ERRIO     IS7
00677 #define IS_MMCIF_ACCIO     IS8
00678 #define IS_POE3_OEI1      IS9
00679 #define IS_POE3_OEI2      IS10
00680 #define IS_POE3_OEI3      IS11
00681 #define IS_POE3_OEI4      IS12
00682 #define IS_RIIC0_TEI0     IS13
00683 #define IS_RIIC0_EEI0     IS14
00684 #define IS_RIIC2_TEI2     IS15
00685 #define IS_RIIC2_EEI2     IS16
00686 #define IS_SSIE0_SSIF0    IS17
00687 #define IS_SSIE1_SSIF1    IS18
00688 #define IS_S12AD_S12CMPAI  IS20
00689 #define IS_S12AD_S12CMPBI  IS21
00690 #define IS_S12AD1_S12CMPAI1 IS22
00691 #define IS_S12AD1_S12CMPBI1 IS23
00692 #define IS_RIIC1_TEI1      IS28
00693 #define IS_RIIC1_EEI1      IS29
00694 #define IS_POEG_POEGGAI     IS7
00695 #define IS_POEG_POEGGBI     IS8
00696 #define IS_POEG_POEGGCI     IS9
00697 #define IS_POEG_POEGGDI     IS10
00698 #define IS_SCI8_TEI8        IS0
00699 #define IS_SCI8_ERI8        IS1
00700 #define IS_SCI9_TEI9        IS4
00701 #define IS_SCI9_ERI9        IS5
00702 #define IS_SCI10_TEI10     IS8
00703 #define IS_SCI10_ERI10     IS9
00704 #define IS_SCI11_TEI11     IS12
00705 #define IS_SCI11_ERI11     IS13
00706 #define IS_RSPI0_SPII0     IS16
00707 #define IS_RSPI0_SPEI0     IS17
00708 #define IS_RSPI1_SPII1     IS18
00709 #define IS_RSPI1_SPEI1     IS19
00710 #define IS_RSPI2_SPII2     IS20
00711 #define IS_RSPI2_SPEI2     IS21
00712 #define IS_SCI7_TEI7        IS22
00713 #define IS_SCI7_ERI7        IS23
00714 #define IS_EPTPC_MINT      IS0
00715 #define IS_PTPEDMAC_PINT    IS1
00716 #define IS_EDMAC0_EINT0     IS4
00717 #define IS_EDMAC1_EINT1     IS5
00718 #define IS_GLCDC_VPOS      IS8
00719 #define IS_GLCDC_GRIUF      IS9
00720 #define IS_GLCDC_GR2UF      IS10
00721 #define IS_DRW2D_DRWIRQ     IS11
00722
00723 #define EN_DPFPU_DPFPUX      EN0
00724 #define EN_CAN0_ERS0        EN0
00725 #define EN_CAN1_ERS1        EN1
00726 #define EN_CAN2_ERS2        EN2
00727 #define EN_SCI0_TEI0        EN0
00728 #define EN_SCI0_ERI0        EN1
00729 #define EN_SCI1_TEI1        EN2
00730 #define EN_SCI1_ERI1        EN3
00731 #define EN_SCI2_TEI2        EN4
00732 #define EN_SCI2_ERI2        EN5
00733 #define EN_SCI3_TEI3        EN6
00734 #define EN_SCI3_ERI3        EN7
00735 #define EN_SCI4_TEI4        EN8
00736 #define EN_SCI4_ERI4        EN9
00737 #define EN_SCI5_TEI5        EN10
00738 #define EN_SCI5_ERI5        EN11
00739 #define EN_SCI6_TEI6        EN12
00740 #define EN_SCI6_ERI6        EN13
00741 #define EN_SCI12_TEI12     EN16
00742 #define EN_SCI12_ERI12     EN17
00743 #define EN_SCI12_SCIX0     EN18
00744 #define EN_SCI12_SCIX1     EN19
00745 #define EN_SCI12_SCIX2     EN20
00746 #define EN_SCI12_SCIX3     EN21
00747 #define EN_QSPI_QSPSSLI    EN24
00748 #define EN_CAC_FERRI       EN26
00749 #define EN_CAC_MENDI       EN27
00750 #define EN_CAC_OVFI        EN28
00751 #define EN_DOC_DOPCI       EN29
00752 #define EN_PDC_PCFEI      EN30
00753 #define EN_PDC_PCERI      EN31
00754 #define EN_SDHI_CDETI     EN3
00755 #define EN_SDHI_CACI      EN4
00756 #define EN_SDHI_SDACI     EN5

```

```
00757 #define EN_MMCIF_CDETIO      EN6
00758 #define EN_MMCIF_ERRIO        EN7
00759 #define EN_MMCIF_ACCIO         EN8
00760 #define EN_POE3_OEI1           EN9
00761 #define EN_POE3_OEI2           EN10
00762 #define EN_POE3_OEI3           EN11
00763 #define EN_POE3_OEI4           EN12
00764 #define EN_RIIC0_TEI0          EN13
00765 #define EN_RIIC0_EEI0          EN14
00766 #define EN_RIIC2_TEI2          EN15
00767 #define EN_RIIC2_EEI2          EN16
00768 #define EN_SSIE0_SSIF0         EN17
00769 #define EN_SSIE1_SSIF1         EN18
00770 #define EN_S12AD_S12CMPAI       EN20
00771 #define EN_S12AD_S12CMPBI       EN21
00772 #define EN_S12AD1_S12CMPAI1     EN22
00773 #define EN_S12AD1_S12CMPBI1     EN23
00774 #define EN_RIIC1_TEI1          EN28
00775 #define EN_RIIC1_EEI1          EN29
00776 #define EN_POEG_POEGGAI         EN7
00777 #define EN_POEG_POEGGBI         EN8
00778 #define EN_POEG_POEGGCI         EN9
00779 #define EN_POEG_POEGGDI         EN10
00780 #define EN_SCI8_TEI8           EN0
00781 #define EN_SCI8_ERI8           EN1
00782 #define EN_SCI9_TEI9           EN4
00783 #define EN_SCI9_ERI9           EN5
00784 #define EN_SCI10_TEI10         EN8
00785 #define EN_SCI10_ERI10         EN9
00786 #define EN_SCI11_TEI11         EN12
00787 #define EN_SCI11_ERI11         EN13
00788 #define EN_RSPI0_SPII0         EN16
00789 #define EN_RSPI0_SPEI0         EN17
00790 #define EN_RSPI1_SPII1         EN18
00791 #define EN_RSPI1_SPEI1         EN19
00792 #define EN_RSPI2_SPII2         EN20
00793 #define EN_RSPI2_SPEI2         EN21
00794 #define EN_SCI7_TEI7           EN22
00795 #define EN_SCI7_ERI7           EN23
00796 #define EN_EPTPC_MINT          EN0
00797 #define EN_PTPEDMAC_PINT        EN1
00798 #define EN_EDMAC0_EINT0         EN4
00799 #define EN_EDMAC1_EINT1         EN5
00800 #define EN_GLCDC_VPOS           EN8
00801 #define EN_GLCDC_GR1UF         EN9
00802 #define EN_GLCDC_GR2UF         EN10
00803 #define EN_DRW2D_DRWIRQ        EN11
00804
00805 #define CLR_DPFPU_DPFPUEX       CLR0
00806 #define CLR_CAN0_ERS0           CLR0
00807 #define CLR_CAN1_ERS1           CLR1
00808 #define CLR_CAN2_ERS2           CLR2
00809
00810 #define GEN_DPFPU_DPFPUEX       GENIE0
00811 #define GEN_CAN0_ERS0           GENBE0
00812 #define GEN_CAN1_ERS1           GENBE0
00813 #define GEN_CAN2_ERS2           GENBE0
00814 #define GEN_SCI0_TEI0           GENBL0
00815 #define GEN_SCI0_ERI0           GENBL0
00816 #define GEN_SCI1_TEI1           GENBL0
00817 #define GEN_SCI1_ERI1           GENBL0
00818 #define GEN_SCI2_TEI2           GENBL0
00819 #define GEN_SCI2_ERI2           GENBL0
00820 #define GEN_SCI3_TEI3           GENBL0
00821 #define GEN_SCI3_ERI3           GENBL0
00822 #define GEN_SCI4_TEI4           GENBL0
00823 #define GEN_SCI4_ERI4           GENBL0
00824 #define GEN_SCI5_TEI5           GENBL0
00825 #define GEN_SCI5_ERI5           GENBL0
00826 #define GEN_SCI6_TEI6           GENBL0
00827 #define GEN_SCI6_ERI6           GENBL0
00828 #define GEN_SCI12_TEI12         GENBL0
00829 #define GEN_SCI12_ERI12         GENBL0
00830 #define GEN_SCI12_SCIX0         GENBL0
00831 #define GEN_SCI12_SCIX1         GENBL0
00832 #define GEN_SCI12_SCIX2         GENBL0
00833 #define GEN_SCI12_SCIX3         GENBL0
00834 #define GEN_QSPI_QSPSSI         GENBL0
00835 #define GEN_CAC_FERRI           GENBL0
00836 #define GEN_CAC_MENDI          GENBL0
00837 #define GEN_CAC_OVFI            GENBL0
00838 #define GEN_DOC_DOPCI           GENBL0
00839 #define GEN_PDC_PCFEI           GENBL0
00840 #define GEN_PDC_PCERI           GENBL0
00841 #define GEN_SDHI_CDETI          GENBL1
00842 #define GEN_SDHI_CACI           GENBL1
00843 #define GEN_SDHI_SDACI          GENBL1
```

```
00844 #define GEN_MMCIF_CDETIO      GENBL1
00845 #define GEN_MMCIF_ERRIO        GENBL1
00846 #define GEN_MMCIF_ACCIO         GENBL1
00847 #define GEN_POE3_OEI1            GENBL1
00848 #define GEN_POE3_OEI2            GENBL1
00849 #define GEN_POE3_OEI3            GENBL1
00850 #define GEN_POE3_OEI4            GENBL1
00851 #define GEN_RIIC0_TEI0            GENBL1
00852 #define GEN_RIIC0_EEI0            GENBL1
00853 #define GEN_RIIC2_TEI2            GENBL1
00854 #define GEN_RIIC2_EEI2            GENBL1
00855 #define GEN_SSIE0_SSIF0          GENBL1
00856 #define GEN_SSIE1_SSIF1          GENBL1
00857 #define GEN_S12AD_S12CMPAI        GENBL1
00858 #define GEN_S12AD_S12CMPBI        GENBL1
00859 #define GEN_S12AD1_S12CMPAI1      GENBL1
00860 #define GEN_S12AD1_S12CMPBI1      GENBL1
00861 #define GEN_RIIC1_TEI1            GENBL1
00862 #define GEN_RIIC1_EEI1            GENBL1
00863 #define GEN_POEG_POEGGAI          GENBL2
00864 #define GEN_POEG_POEGGBI          GENBL2
00865 #define GEN_POEG_POEGGCI          GENBL2
00866 #define GEN_POEG_POEGGDI          GENBL2
00867 #define GEN_SCI8_TEI8              GENAL0
00868 #define GEN_SCI8_ERI8              GENAL0
00869 #define GEN_SCI9_TEI9              GENAL0
00870 #define GEN_SCI9_ERI9              GENAL0
00871 #define GEN_SCI10_TEI10           GENAL0
00872 #define GEN_SCI10_ERI10           GENAL0
00873 #define GEN_SCI11_TEI11           GENAL0
00874 #define GEN_SCI11_ERI11           GENAL0
00875 #define GEN_RSPI0_SPII0           GENAL0
00876 #define GEN_RSPI0_SPEI0           GENAL0
00877 #define GEN_RSPI1_SPII1           GENAL0
00878 #define GEN_RSPI1_SPEI1           GENAL0
00879 #define GEN_RSPI2_SPII2           GENAL0
00880 #define GEN_RSPI2_SPEI2           GENAL0
00881 #define GEN_SCI7_TEI7              GENAL0
00882 #define GEN_SCI7_ERI7              GENAL0
00883 #define GEN_EPTPC_MINT             GENAL1
00884 #define GEN_PTPEDMAC_PINT          GENAL1
00885 #define GEN_EDMAC0_EINT0           GENAL1
00886 #define GEN_EDMAC1_EINT1           GENAL1
00887 #define GEN_GLCDC_VPOS             GENAL1
00888 #define GEN_GLCDC_GR1UF            GENAL1
00889 #define GEN_GLCDC_GR2UF            GENAL1
00890 #define GEN_DRW2D_DRWIRQ           GENAL1
00891
00892 #define GRP_DPFPD_DPFPUEX          GRPIE0
00893 #define GRP_CAN0_ERS0              GRPBE0
00894 #define GRP_CAN1_ERS1              GRPBE0
00895 #define GRP_CAN2_ERS2              GRPBE0
00896 #define GRP_SCI0_TEI0              GRPBL0
00897 #define GRP_SCI0_ERI0              GRPBL0
00898 #define GRP_SCI1_TEI1              GRPBL0
00899 #define GRP_SCI1_ERI1              GRPBL0
00900 #define GRP_SCI2_TEI2              GRPBL0
00901 #define GRP_SCI2_ERI2              GRPBL0
00902 #define GRP_SCI3_TEI3              GRPBL0
00903 #define GRP_SCI3_ERI3              GRPBL0
00904 #define GRP_SCI4_TEI4              GRPBL0
00905 #define GRP_SCI4_ERI4              GRPBL0
00906 #define GRP_SCI5_TEI5              GRPBL0
00907 #define GRP_SCI5_ERI5              GRPBL0
00908 #define GRP_SCI6_TEI6              GRPBL0
00909 #define GRP_SCI6_ERI6              GRPBL0
00910 #define GRP_SCI12_TEI12            GRPBL0
00911 #define GRP_SCI12_ERI12            GRPBL0
00912 #define GRP_SCI12_SCIX0            GRPBL0
00913 #define GRP_SCI12_SCIX1            GRPBL0
00914 #define GRP_SCI12_SCIX2            GRPBL0
00915 #define GRP_SCI12_SCIX3            GRPBL0
00916 #define GRP_QSPI_QSPSSLI           GRPBL0
00917 #define GRP_CAC_FERRI              GRPBL0
00918 #define GRP_CAC_MENDI              GRPBL0
00919 #define GRP_CAC_OVFI               GRPBL0
00920 #define GRP_DOC_DOPCI              GRPBL0
00921 #define GRP_PDC_PCFEI              GRPBL0
00922 #define GRP_PDC_PCERI              GRPBL0
00923 #define GRP_SDHI_CDETI             GRPBL1
00924 #define GRP_SDHI_CACI              GRPBL1
00925 #define GRP_SDHI_SDACI             GRPBL1
00926 #define GRP_MMCIF_CDETIO          GRPBL1
00927 #define GRP_MMCIF_ERRIO            GRPBL1
00928 #define GRP_MMCIF_ACCIO            GRPBL1
00929 #define GRP_POE3_OEI1              GRPBL1
00930 #define GRP_POE3_OEI2              GRPBL1
```

```

00931 #define GRP_POE3_OEI3      GRPBL1
00932 #define GRP_POE3_OEI4      GRPBL1
00933 #define GRP_RIIC0_TEI0      GRPBL1
00934 #define GRP_RIIC0_EEI0      GRPBL1
00935 #define GRP_RIIC2_TEI2      GRPBL1
00936 #define GRP_RIIC2_EEI2      GRPBL1
00937 #define GRP_SSIE0_SSIF0      GRPBL1
00938 #define GRP_SSIE1_SSIF1      GRPBL1
00939 #define GRP_S12AD_S12CMPAI    GRPBL1
00940 #define GRP_S12AD_S12CMPBI    GRPBL1
00941 #define GRP_S12AD1_S12CMPAI1  GRPBL1
00942 #define GRP_S12AD1_S12CMPBI1  GRPBL1
00943 #define GRP_RIIC1_TEI1      GRPBL1
00944 #define GRP_RIIC1_EEI1      GRPBL1
00945 #define GRP_POEG_POEGGAI      GRPBL2
00946 #define GRP_POEG_POEGGBI      GRPBL2
00947 #define GRP_POEG_POEGGCI      GRPBL2
00948 #define GRP_POEG_POEGGDI      GRPBL2
00949 #define GRP_SCI8_TEI8      GRPAL0
00950 #define GRP_SCI8_ERI8      GRPAL0
00951 #define GRP_SCI9_TEI9      GRPAL0
00952 #define GRP_SCI9_ERI9      GRPAL0
00953 #define GRP_SCI10_TEI10     GRPAL0
00954 #define GRP_SCI10_ERI10     GRPAL0
00955 #define GRP_SCI11_TEI11     GRPAL0
00956 #define GRP_SCI11_ERI11     GRPAL0
00957 #define GRP_RSPI0_SPII0     GRPAL0
00958 #define GRP_RSPI0_SPEI0     GRPAL0
00959 #define GRP_RSPI1_SPII1     GRPAL0
00960 #define GRP_RSPI1_SPEI1     GRPAL0
00961 #define GRP_RSPI2_SPII2     GRPAL0
00962 #define GRP_RSPI2_SPEI2     GRPAL0
00963 #define GRP_SCI7_TEI7      GRPAL0
00964 #define GRP_SCI7_ERI7      GRPAL0
00965 #define GRP_EPTPC_MINT      GRPAL1
00966 #define GRP_PTPEDMAC_PINT   GRPAL1
00967 #define GRP_EDMAC0_EINT0     GRPAL1
00968 #define GRP_EDMAC1_EINT1     GRPAL1
00969 #define GRP_GLCDC_VPOS      GRPAL1
00970 #define GRP_GLCDC_GR1UF      GRPAL1
00971 #define GRP_GLCDC_GR2UF      GRPAL1
00972 #define GRP_DRW2D_DRWIRQ     GRPAL1
00973
00974 #define GCR_DPFPUP_DPFPUEX    GCRIE0
00975 #define GCR_CAN0_ERS0        GCRBE0
00976 #define GCR_CAN1_ERS1        GCRBE0
00977 #define GCR_CAN2_ERS2        GCRBE0
00978
00979 #define __IR( x )      ICU.IR[ IR ## x ].BIT.IR
00980 #define __IR( x )      IR( x )
00981 #define IR( x , y )    IR( _ ## x ## _ ## y )
00982 #define __DTCE( x )    ICU.DTCER[ DTCE ## x ].BIT.DTCE
00983 #define __DTCE( x )    DTCE( x )
00984 #define DTCE( x , y )  DTCE( _ ## x ## _ ## y )
00985 #define __IEN( x )     ICU.IER[ IER ## x ].BIT.IEN ## x
00986 #define __IEN( x )     IEN( x )
00987 #define IEN( x , y )   IEN( _ ## x ## _ ## y )
00988 #define __IPR( x )     ICU.IPR[ IPR ## x ].BIT.IPR
00989 #define __IPR( x )     IPR( x )
00990 #define IPR( x , y )   IPR( _ ## x ## _ ## y )
00991 #define __VECT( x )    VECT ## x
00992 #define __VECT( x )    VECT( x )
00993 #define VECT( x , y )  VECT( _ ## x ## _ ## y )
00994 #define __MSTP( x )    MSTP ## x
00995 #define __MSTP( x )    MSTP( x )
00996 #define MSTP( x )      _MSTP( _ ## x )
00997
00998 #define __IS( x )      ICU.GRP ## x.BIT.IS ## x
00999 #define __IS( x )      IS( x )
01000 #define IS( x , y )    IS( _ ## x ## _ ## y )
01001 #define __EN( x )      ICU.GEN ## x.BIT.EN ## x
01002 #define __EN( x )      EN( x )
01003 #define EN( x , y )    EN( _ ## x ## _ ## y )
01004 #define __CLR( x )      ICU.GCR ## x.BIT.CLR ## x
01005 #define __CLR( x )      CLR( x )
01006 #define CLR( x , y )    _CLR( _ ## x ## _ ## y )
01007
01008 #define BSC      (*(volatile struct st_bsc      *)0x81300)
01009 #define CAC      (*(volatile struct st_cac      *)0x8B000)
01010 #define CAN0     (*(volatile struct st_can      *)0x90200)
01011 #define CAN1     (*(volatile struct st_can      *)0x91200)
01012 #define CAN2     (*(volatile struct st_can      *)0x92200)
01013 #define CMT      (*(volatile struct st_cmt      *)0x88000)
01014 #define CMT0     (*(volatile struct st_cmt0     *)0x88002)
01015 #define CMT1     (*(volatile struct st_cmt0     *)0x88008)
01016 #define CMT2     (*(volatile struct st_cmt0     *)0x88012)
01017 #define CMT3     (*(volatile struct st_cmt0     *)0x88018)

```

```
01018 #define CMTW0      (*(volatile struct st_cmtw      *)0x94200)
01019 #define CMTW1      (*(volatile struct st_cmtw      *)0x94280)
01020 #define CRC          (*(volatile struct st_crc       *)0x88280)
01021 #define DA           (*(volatile struct st_da        *)0x88040)
01022 #define DMAC         (*(volatile struct st_dmac      *)0x82200)
01023 #define DMAC0        (*(volatile struct st_dmac0     *)0x82000)
01024 #define DMAC1        (*(volatile struct st_dmac1     *)0x82040)
01025 #define DMAC2        (*(volatile struct st_dmac1     *)0x82080)
01026 #define DMAC3        (*(volatile struct st_dmac1     *)0x820C0)
01027 #define DMAC4        (*(volatile struct st_dmac1     *)0x82100)
01028 #define DMAC5        (*(volatile struct st_dmac1     *)0x82140)
01029 #define DMAC6        (*(volatile struct st_dmac1     *)0x82180)
01030 #define DMAC7        (*(volatile struct st_dmac1     *)0x821C0)
01031 #define DOC          (*(volatile struct st_doc       *)0x8B080)
01032 #define DRW2D        (*(volatile struct st_drw2d     *)0xE3000)
01033 #define DTC          (*(volatile struct st_dtc       *)0x82400)
01034 #define ECCRAM       (*(volatile struct st_eccram     *)0x812C0)
01035 #define EDMAC0       (*(volatile struct st_edmac      *)0xC0000)
01036 #define EDMAC1       (*(volatile struct st_edmac      *)0xC0200)
01037 #define ELC          (*(volatile struct st_elc       *)0x8B100)
01038 #define EPTPC        (*(volatile struct st_eptpc     *)0xC0500)
01039 #define EPTPC0       (*(volatile struct st_eptpc0     *)0xC4800)
01040 #define EPTPC1       (*(volatile struct st_eptpc0     *)0xC4C00)
01041 #define ETHERC0      (*(volatile struct st_etherc    *)0xC0100)
01042 #define ETHERC1      (*(volatile struct st_etherc    *)0xC0300)
01043 #define EXDMAC       (*(volatile struct st_exdmac     *)0x82A00)
01044 #define EXDMAC0      (*(volatile struct st_exdmac0    *)0x82800)
01045 #define EXDMAC1      (*(volatile struct st_exdmac1    *)0x82840)
01046 #define FLASH        (*(volatile struct st_flash     *)0x81000)
01047 #define GLCDC        (*(volatile struct st_glcdc      *)0xE0000)
01048 #define GPTW0        (*(volatile struct st_gptw      *)0xC2000)
01049 #define GPTW1        (*(volatile struct st_gptw      *)0xC2100)
01050 #define GPTW2        (*(volatile struct st_gptw      *)0xC2200)
01051 #define GPTW3        (*(volatile struct st_gptw      *)0xC2300)
01052 #define ICU          (*(volatile struct st_icu       *)0x87000)
01053 #define IWDI         (*(volatile struct st_iwdt      *)0x88030)
01054 #define MMCI         (*(volatile struct st_mmcif     *)0x88500)
01055 #define MPC          (*(volatile struct st_mpc       *)0x8C100)
01056 #define MPU          (*(volatile struct st_mpu       *)0x86400)
01057 #define MTU          (*(volatile struct st_mtu       *)0xC120A)
01058 #define MTU0         (*(volatile struct st_mtu0      *)0xC1290)
01059 #define MTU1         (*(volatile struct st_mtu1      *)0xC1290)
01060 #define MTU2         (*(volatile struct st_mtu2      *)0xC1292)
01061 #define MTU3         (*(volatile struct st_mtu3      *)0xC1200)
01062 #define MTU4         (*(volatile struct st_mtu4      *)0xC1200)
01063 #define MTU5         (*(volatile struct st_mtu5      *)0xC1A94)
01064 #define MTU6         (*(volatile struct st_mtu6      *)0xC1A00)
01065 #define MTU7         (*(volatile struct st_mtu7      *)0xC1A00)
01066 #define MTU8         (*(volatile struct st_mtu8      *)0xC1298)
01067 #define OFSM         (*(volatile struct st_ofsm      *)0xFE7F5D00)
01068 #define PDC          (*(volatile struct st_pdc       *)0xA0500)
01069 #define PMGI         (*(volatile struct st_pmgi      *)0xC5880)
01070 #define PMGI1        (*(volatile struct st_pmgi      *)0xC5890)
01071 #define POE3         (*(volatile struct st_poe       *)0x8C4C0)
01072 #define POEG         (*(volatile struct st_poeg      *)0x9E000)
01073 #define PORT0        (*(volatile struct st_port0     *)0x8C000)
01074 #define PORT1        (*(volatile struct st_port1     *)0x8C001)
01075 #define PORT2        (*(volatile struct st_port2     *)0x8C002)
01076 #define PORT3        (*(volatile struct st_port3     *)0x8C003)
01077 #define PORT4        (*(volatile struct st_port4     *)0x8C004)
01078 #define PORT5        (*(volatile struct st_port5     *)0x8C005)
01079 #define PORT6        (*(volatile struct st_port6     *)0x8C006)
01080 #define PORT7        (*(volatile struct st_port7     *)0x8C007)
01081 #define PORT8        (*(volatile struct st_port8     *)0x8C008)
01082 #define PORT9        (*(volatile struct st_port9     *)0x8C009)
01083 #define PORTA        (*(volatile struct st_porta     *)0x8C00A)
01084 #define PORTB        (*(volatile struct st_portb     *)0x8C00B)
01085 #define PORTC        (*(volatile struct st_portc     *)0x8C00C)
01086 #define PORTD        (*(volatile struct st_portd     *)0x8C00D)
01087 #define PORTE        (*(volatile struct st_porte     *)0x8C00E)
01088 #define PORTF        (*(volatile struct st_portf     *)0x8C00F)
01089 #define PORTG        (*(volatile struct st_portg     *)0x8C010)
01090 #define PORTH        (*(volatile struct st_porth     *)0x8C011)
01091 #define PORTJ        (*(volatile struct st_portj     *)0x8C012)
01092 #define PORTK        (*(volatile struct st_portk     *)0x8C013)
01093 #define PORTL        (*(volatile struct st_portl     *)0x8C014)
01094 #define PORTM        (*(volatile struct st_portm     *)0x8C015)
01095 #define PORTN        (*(volatile struct st_portn     *)0x8C016)
01096 #define PORTQ        (*(volatile struct st_portq     *)0x8C017)
01097 #define PPG0         (*(volatile struct st_ppg0      *)0x881E6)
01098 #define PPG1         (*(volatile struct st_ppg1      *)0x881F0)
01099 #define PTPEDMAC     (*(volatile struct st_ptpedmac   *)0xC0400)
01100 #define QSPI         (*(volatile struct st_qspi      *)0x89E00)
01101 #define RAM          (*(volatile struct st_ram       *)0x81200)
01102 #define RIIC0        (*(volatile struct st_riic      *)0x88300)
01103 #define RIIC1        (*(volatile struct st_riic      *)0x88320)
01104 #define RIIC2        (*(volatile struct st_riic      *)0x88340)
```

```

01105 #define RSPi0      (*(volatile struct st_rspi      *)0xD0100)
01106 #define RSPi1      (*(volatile struct st_rspi      *)0xD0140)
01107 #define RSPi2      (*(volatile struct st_rspi      *)0xD0300)
01108 #define RTC         (*(volatile struct st_rtc       *)0x8C400)
01109 #define S12AD       (*(volatile struct st_s12ad      *)0x89000)
01110 #define S12AD1      (*(volatile struct st_s12ad1     *)0x89100)
01111 #define SCi0        (*(volatile struct st_sci0       *)0x8A000)
01112 #define SCi1        (*(volatile struct st_sci0       *)0x8A020)
01113 #define SCi2        (*(volatile struct st_sci0       *)0x8A040)
01114 #define SCi3        (*(volatile struct st_sci0       *)0x8A060)
01115 #define SCi4        (*(volatile struct st_sci0       *)0x8A080)
01116 #define SCi5        (*(volatile struct st_sci0       *)0x8A0A0)
01117 #define SCi6        (*(volatile struct st_sci0       *)0x8A0C0)
01118 #define SCi7        (*(volatile struct st_sci7       *)0xD00E0)
01119 #define SCi8        (*(volatile struct st_sci7       *)0xD0000)
01120 #define SCi9        (*(volatile struct st_sci7       *)0xD0020)
01121 #define SCi10       (*(volatile struct st_sci7       *)0xD0040)
01122 #define SCi11       (*(volatile struct st_sci7       *)0xD0060)
01123 #define SCi12       (*(volatile struct st_sci12      *)0x8B300)
01124 #define SDHi        (*(volatile struct st_sdhi       *)0x8AC00)
01125 #define SMCi0       (*(volatile struct st_smci      *)0x8A000)
01126 #define SMCi1       (*(volatile struct st_smci      *)0x8A020)
01127 #define SMCi2       (*(volatile struct st_smci      *)0x8A040)
01128 #define SMCi3       (*(volatile struct st_smci      *)0x8A060)
01129 #define SMCi4       (*(volatile struct st_smci      *)0x8A080)
01130 #define SMCi5       (*(volatile struct st_smci      *)0x8A0A0)
01131 #define SMCi6       (*(volatile struct st_smci      *)0x8A0C0)
01132 #define SMCi7       (*(volatile struct st_smci      *)0xD00E0)
01133 #define SMCi8       (*(volatile struct st_smci      *)0xD0000)
01134 #define SMCi9       (*(volatile struct st_smci      *)0xD0020)
01135 #define SMCi10      (*(volatile struct st_smci      *)0xD0040)
01136 #define SMCi11      (*(volatile struct st_smci      *)0xD0060)
01137 #define SMCi12      (*(volatile struct st_smci      *)0x8B300)
01138 #define SSIE0       (*(volatile struct st_ssie      *)0x8A500)
01139 #define SSIE1       (*(volatile struct st_ssie      *)0x8A540)
01140 #define SYSTEM      (*(volatile struct st_system    *)0x80000)
01141 #define TEMPS       (*(volatile struct st_temps     *)0x8C500)
01142 #define TMR0        (*(volatile struct st_tmr0      *)0x88200)
01143 #define TMR1        (*(volatile struct st_tmr1      *)0x88201)
01144 #define TMR2        (*(volatile struct st_tmr0      *)0x88210)
01145 #define TMR3        (*(volatile struct st_tmr1      *)0x88211)
01146 #define TMR01       (*(volatile struct st_tmr01     *)0x88204)
01147 #define TMR23       (*(volatile struct st_tmr01     *)0x88214)
01148 #define TPU0        (*(volatile struct st_tpu0      *)0x88108)
01149 #define TPU1        (*(volatile struct st_tpu1      *)0x88108)
01150 #define TPU2        (*(volatile struct st_tpu2      *)0x8810A)
01151 #define TPU3        (*(volatile struct st_tpu3      *)0x8810A)
01152 #define TPU4        (*(volatile struct st_tpu4      *)0x8810C)
01153 #define TPU5        (*(volatile struct st_tpu5      *)0x8810C)
01154 #define TPUA        (*(volatile struct st_tpua      *)0x88100)
01155 #define USB         (*(volatile struct st_usb       *)0xA0400)
01156 #define USB0        (*(volatile struct st_usb0      *)0xA0000)
01157 #define WDT         (*(volatile struct st_wdt       *)0x88020)
01158 #define FLASHCONST  (*(volatile struct st_flashconst *)0xFE7F7D90)
01159 #define TEMPSCONST  (*(volatile struct st_tempsconst *)0xFE7F7D7C)
01160
01161 typedef enum enum_ir {
01162 IR_BSC_BUSERR=16,IR_ICU_GROUPIE0=17,
01163 IR_RAM_RAMERR,
01164 IR_FCU_FIFERR=21,IR_FCU_FRDYI=23,
01165 IR_ICU_SWINT2=26,IR_ICU_SWINT,
01166 IR_CMT0_CMIO,
01167 IR_CMT1_CMII,
01168 IR_CMTW0_CMWI0,
01169 IR_CMTW1_CMWI1,
01170 IR_USB0_D0FIFO0=34,IR_USB0_D1FIFO0,
01171 IR_RSPi0_SPRI0=38,IR_RSPi0_SPTi0,
01172 IR_RSPi1_SPRI1,IR_RSPi1_SPTi1,
01173 IR_QSPI_SPRI,IR_QSPI_SPTI,
01174 IR_SDHi_SBFai,
01175 IR_MMCI_MBFai,
01176 IR_SSIE0_SSITXi0,IR_SSIE0_SSIRXi0,
01177 IR_SSIE1_SSIRTi1,
01178 IR_RiIC1_RXi1=50,IR_RiIC1_TXi1,
01179 IR_RiIC0_RXi0,IR_RiIC0_TXi0,
01180 IR_RiIC2_RXi2,IR_RiIC2_TXi2,
01181 IR_SCi0_RXi0=58,IR_SCi0_TXi0,
01182 IR_SCi1_RXi1,IR_SCi1_TXi1,
01183 IR_SCi2_RXi2,IR_SCi2_TXi2,
01184
IR_ICU_IRQ0,IR_ICU_IRQ1,IR_ICU_IRQ2,IR_ICU_IRQ3,IR_ICU_IRQ4,IR_ICU_IRQ5,IR_ICU_IRQ6,IR_ICU_IRQ7,
01185
IR_ICU_IRQ8,IR_ICU_IRQ9,IR_ICU_IRQ10,IR_ICU_IRQ11,IR_ICU_IRQ12,IR_ICU_IRQ13,IR_ICU_IRQ14,IR_ICU_IRQ15,
01186 IR_SCi3_RXi3,IR_SCi3_TXi3,
01187 IR_SCi4_RXi4,IR_SCi4_TXi4,
01188 IR_SCi5_RXi5,IR_SCi5_TXi5,
01189 IR_SCi6_RXi6,IR_SCi6_TXi6,

```

```
01190 IR_LVD1_LVD1,
01191 IR_LVD2_LVD2,
01192 IR_USB0_USBR0,
01193 IR_RTC_ALM=92,IR_RTC_PRD,
01194 IR_IWDT_IWUNI=95,
01195 IR_WDT_WUNI,
01196 IR_PDC_PCDFI,
01197 IR_SCI7_RXI7,IR_SCI7_TXI7,
01198 IR_SCI8_RXI8,IR_SCI8_TXI8,
01199 IR_SCI9_RXI9,IR_SCI9_TXI9,
01200 IR_SCI10_RXI10,IR_SCI10_TXI10,
01201 IR_ICU_GROUPBE0,IR_ICU_GROUPBL2,
01202 IR_RSPI2_SPRI2,IR_RSPI2_SPTI2,
01203 IR_ICU_GROUPBL0,IR_ICU_GROUPBL1,IR_ICU_GROUPAL0,IR_ICU_GROUPAL1,
01204 IR_SCI11_RXI11,IR_SCI11_TXI11,
01205 IR_SCI12_RXI12,IR_SCI12_TXI12,
01206 IR_DMAC_DMAC0I=120,IR_DMAC_DMAC1I,IR_DMAC_DMAC2I,IR_DMAC_DMAC3I,IR_DMAC_DMAC74I,
01207 IR_OST_OSTDI,
01208 IR_EXDMAC_EXDMAC0I,IR_EXDMAC_EXDMAC1I,
01209 IR_PERIB_INTB128,IR_PERIB_INTB129,IR_PERIB_INTB130,IR_PERIB_INTB131,IR_PERIB_INTB132,
01210 IR_PERIB_INTB133,IR_PERIB_INTB134,IR_PERIB_INTB135,IR_PERIB_INTB136,IR_PERIB_INTB137,
01211 IR_PERIB_INTB138,IR_PERIB_INTB139,IR_PERIB_INTB140,IR_PERIB_INTB141,IR_PERIB_INTB142,
01212 IR_PERIB_INTB143,IR_PERIB_INTB144,IR_PERIB_INTB145,IR_PERIB_INTB146,IR_PERIB_INTB147,
01213 IR_PERIB_INTB148,IR_PERIB_INTB149,IR_PERIB_INTB150,IR_PERIB_INTB151,IR_PERIB_INTB152,
01214 IR_PERIB_INTB153,IR_PERIB_INTB154,IR_PERIB_INTB155,IR_PERIB_INTB156,IR_PERIB_INTB157,
01215 IR_PERIB_INTB158,IR_PERIB_INTB159,IR_PERIB_INTB160,IR_PERIB_INTB161,IR_PERIB_INTB162,
01216 IR_PERIB_INTB163,IR_PERIB_INTB164,IR_PERIB_INTB165,IR_PERIB_INTB166,IR_PERIB_INTB167,
01217 IR_PERIB_INTB168,IR_PERIB_INTB169,IR_PERIB_INTB170,IR_PERIB_INTB171,IR_PERIB_INTB172,
01218 IR_PERIB_INTB173,IR_PERIB_INTB174,IR_PERIB_INTB175,IR_PERIB_INTB176,IR_PERIB_INTB177,
01219 IR_PERIB_INTB178,IR_PERIB_INTB179,IR_PERIB_INTB180,IR_PERIB_INTB181,IR_PERIB_INTB182,
01220 IR_PERIB_INTB183,IR_PERIB_INTB184,IR_PERIB_INTB185,IR_PERIB_INTB186,IR_PERIB_INTB187,
01221 IR_PERIB_INTB188,IR_PERIB_INTB189,IR_PERIB_INTB190,IR_PERIB_INTB191,IR_PERIB_INTB192,
01222 IR_PERIB_INTB193,IR_PERIB_INTB194,IR_PERIB_INTB195,IR_PERIB_INTB196,IR_PERIB_INTB197,
01223 IR_PERIB_INTB198,IR_PERIB_INTB199,IR_PERIB_INTB200,IR_PERIB_INTB201,IR_PERIB_INTB202,
01224 IR_PERIB_INTB203,IR_PERIB_INTB204,IR_PERIB_INTB205,IR_PERIB_INTB206,IR_PERIB_INTB207,
01225 IR_PERIA_INTA208,IR_PERIA_INTA209,IR_PERIA_INTA210,IR_PERIA_INTA211,IR_PERIA_INTA212,
01226 IR_PERIA_INTA213,IR_PERIA_INTA214,IR_PERIA_INTA215,IR_PERIA_INTA216,IR_PERIA_INTA217,
01227 IR_PERIA_INTA218,IR_PERIA_INTA219,IR_PERIA_INTA220,IR_PERIA_INTA221,IR_PERIA_INTA222,
01228 IR_PERIA_INTA223,IR_PERIA_INTA224,IR_PERIA_INTA225,IR_PERIA_INTA226,IR_PERIA_INTA227,
01229 IR_PERIA_INTA228,IR_PERIA_INTA229,IR_PERIA_INTA230,IR_PERIA_INTA231,IR_PERIA_INTA232,
01230 IR_PERIA_INTA233,IR_PERIA_INTA234,IR_PERIA_INTA235,IR_PERIA_INTA236,IR_PERIA_INTA237,
01231 IR_PERIA_INTA238,IR_PERIA_INTA239,IR_PERIA_INTA240,IR_PERIA_INTA241,IR_PERIA_INTA242,
01232 IR_PERIA_INTA243,IR_PERIA_INTA244,IR_PERIA_INTA245,IR_PERIA_INTA246,IR_PERIA_INTA247,
01233 IR_PERIA_INTA248,IR_PERIA_INTA249,IR_PERIA_INTA250,IR_PERIA_INTA251,IR_PERIA_INTA252,
01234 IR_PERIA_INTA253,IR_PERIA_INTA254,IR_PERIA_INTA255
01235 } enum_ir_t;
01236
01237 typedef enum enum_dtce {
01238 DTCE_ICU_SWINT2=26,DTCE_ICU_SWINT,
01239 DTCE_CMT0_CMI0,
01240 DTCE_CMT1_CMI1,
01241 DTCE_CMTW0_CMWI0,
01242 DTCE_CMTW1_CMWI1,
01243 DTCE_USB0_D0FIFO0=34,DTCE_USB0_D1FIFO0,
01244 DTCE_RSPI0_SPRI0=38,DTCE_RSPI0_SPTI0,
01245 DTCE_RSPI1_SPRI1,DTCE_RSPI1_SPTI1,
01246 DTCE_QSPI_SPRI,DTCE_QSPI_SPTI,
01247 DTCE_SDHI_SBFAl,
01248 DTCE_MMCI_F_MBFAl,
01249 DTCE_SSIE0_SSITXI0,DTCE_SSIE0_SSIRXI0,
01250 DTCE_SSIE1_SSIRTI1,
01251 DTCE_RIIC1_RXI1=50,DTCE_RIIC1_TXI1,
01252 DTCE_RIIC0_RXI0,DTCE_RIIC0_TXI0,
01253 DTCE_RIIC2_RXI2,DTCE_RIIC2_TXI2,
01254 DTCE_SCI0_RXI0=58,DTCE_SCI0_TXI0,
01255 DTCE_SCI1_RXI1,DTCE_SCI1_TXI1,
01256 DTCE_SCI2_RXI2,DTCE_SCI2_TXI2,
01257
    DTCE_ICU_IRQ0,DTCE_ICU_IRQ1,DTCE_ICU_IRQ2,DTCE_ICU_IRQ3,DTCE_ICU_IRQ4,DTCE_ICU_IRQ5,DTCE_ICU_IRQ6,DTCE_ICU_IRQ7,
01258
    DTCE_ICU_IRQ8,DTCE_ICU_IRQ9,DTCE_ICU_IRQ10,DTCE_ICU_IRQ11,DTCE_ICU_IRQ12,DTCE_ICU_IRQ13,DTCE_ICU_IRQ14,DTCE_ICU_IRQ15,
01259 DTCE_SCI3_RXI3,DTCE_SCI3_TXI3,
01260 DTCE_SCI4_RXI4,DTCE_SCI4_TXI4,
01261 DTCE_SCI5_RXI5,DTCE_SCI5_TXI5,
01262 DTCE_SCI6_RXI6,DTCE_SCI6_TXI6,
01263 DTCE_PDC_PCDFI=97,
01264 DTCE_SCI7_RXI7,DTCE_SCI7_TXI7,
01265 DTCE_SCI8_RXI8,DTCE_SCI8_TXI8,
01266 DTCE_SCI9_RXI9,DTCE_SCI9_TXI9,
01267 DTCE_SCI10_RXI10,DTCE_SCI10_TXI10,
01268 DTCE_RSPI2_SPRI2=108,DTCE_RSPI2_SPTI2,
01269 DTCE_SCI11_RXI11=114,DTCE_SCI11_TXI11,
01270 DTCE_SCI12_RXI12,DTCE_SCI12_TXI12,
01271 DTCE_DMAC_DMAC0I=120,DTCE_DMAC_DMAC1I,DTCE_DMAC_DMAC2I,DTCE_DMAC_DMAC3I,
01272 DTCE_EXDMAC_EXDMAC0I=126,DTCE_EXDMAC_EXDMAC1I,
01273
    DTCE_PERIB_INTB128,DTCE_PERIB_INTB129,DTCE_PERIB_INTB130,DTCE_PERIB_INTB131,DTCE_PERIB_INTB132,
```

```
01274 DTCE_PERIB_INTB133,DTCE_PERIB_INTB134,DTCE_PERIB_INTB135,DTCE_PERIB_INTB136,DTCE_PERIB_INTB137,
01275 DTCE_PERIB_INTB138,DTCE_PERIB_INTB139,DTCE_PERIB_INTB140,DTCE_PERIB_INTB141,DTCE_PERIB_INTB142,
01276 DTCE_PERIB_INTB143,DTCE_PERIB_INTB144,DTCE_PERIB_INTB145,DTCE_PERIB_INTB146,DTCE_PERIB_INTB147,
01277 DTCE_PERIB_INTB148,DTCE_PERIB_INTB149,DTCE_PERIB_INTB150,DTCE_PERIB_INTB151,DTCE_PERIB_INTB152,
01278 DTCE_PERIB_INTB153,DTCE_PERIB_INTB154,DTCE_PERIB_INTB155,DTCE_PERIB_INTB156,DTCE_PERIB_INTB157,
01279 DTCE_PERIB_INTB158,DTCE_PERIB_INTB159,DTCE_PERIB_INTB160,DTCE_PERIB_INTB161,DTCE_PERIB_INTB162,
01280 DTCE_PERIB_INTB163,DTCE_PERIB_INTB164,DTCE_PERIB_INTB165,DTCE_PERIB_INTB166,DTCE_PERIB_INTB167,
01281 DTCE_PERIB_INTB168,DTCE_PERIB_INTB169,DTCE_PERIB_INTB170,DTCE_PERIB_INTB171,DTCE_PERIB_INTB172,
01282 DTCE_PERIB_INTB173,DTCE_PERIB_INTB174,DTCE_PERIB_INTB175,DTCE_PERIB_INTB176,DTCE_PERIB_INTB177,
01283 DTCE_PERIB_INTB178,DTCE_PERIB_INTB179,DTCE_PERIB_INTB180,DTCE_PERIB_INTB181,DTCE_PERIB_INTB182,
01284 DTCE_PERIB_INTB183,DTCE_PERIB_INTB184,DTCE_PERIB_INTB185,DTCE_PERIB_INTB186,DTCE_PERIB_INTB187,
01285 DTCE_PERIB_INTB188,DTCE_PERIB_INTB189,DTCE_PERIB_INTB190,DTCE_PERIB_INTB191,DTCE_PERIB_INTB192,
01286 DTCE_PERIB_INTB193,DTCE_PERIB_INTB194,DTCE_PERIB_INTB195,DTCE_PERIB_INTB196,DTCE_PERIB_INTB197,
01287 DTCE_PERIB_INTB198,DTCE_PERIB_INTB199,DTCE_PERIB_INTB200,DTCE_PERIB_INTB201,DTCE_PERIB_INTB202,
01288 DTCE_PERIB_INTB203,DTCE_PERIB_INTB204,DTCE_PERIB_INTB205,DTCE_PERIB_INTB206,DTCE_PERIB_INTB207,
01289 DTCE_PERIA_INTA208,DTCE_PERIA_INTA209,DTCE_PERIA_INTA210,DTCE_PERIA_INTA211,DTCE_PERIA_INTA212,
01290 DTCE_PERIA_INTA213,DTCE_PERIA_INTA214,DTCE_PERIA_INTA215,DTCE_PERIA_INTA216,DTCE_PERIA_INTA217,
01291 DTCE_PERIA_INTA218,DTCE_PERIA_INTA219,DTCE_PERIA_INTA220,DTCE_PERIA_INTA221,DTCE_PERIA_INTA222,
01292 DTCE_PERIA_INTA223,DTCE_PERIA_INTA224,DTCE_PERIA_INTA225,DTCE_PERIA_INTA226,DTCE_PERIA_INTA227,
01293 DTCE_PERIA_INTA228,DTCE_PERIA_INTA229,DTCE_PERIA_INTA230,DTCE_PERIA_INTA231,DTCE_PERIA_INTA232,
01294 DTCE_PERIA_INTA233,DTCE_PERIA_INTA234,DTCE_PERIA_INTA235,DTCE_PERIA_INTA236,DTCE_PERIA_INTA237,
01295 DTCE_PERIA_INTA238,DTCE_PERIA_INTA239,DTCE_PERIA_INTA240,DTCE_PERIA_INTA241,DTCE_PERIA_INTA242,
01296 DTCE_PERIA_INTA243,DTCE_PERIA_INTA244,DTCE_PERIA_INTA245,DTCE_PERIA_INTA246,DTCE_PERIA_INTA247,
01297 DTCE_PERIA_INTA248,DTCE_PERIA_INTA249,DTCE_PERIA_INTA250,DTCE_PERIA_INTA251,DTCE_PERIA_INTA252,
01298 DTCE_PERIA_INTA253,DTCE_PERIA_INTA254,DTCE_PERIA_INTA255
01299 } enum_dtce_t;
01300
01301 typedef enum enum_ier {
01302 IER_BSC_BUSERR=0x02,
01303 IER_ICU_GROUPIE0=0x02,
01304 IER_RAM_RAMERR=0x02,
01305 IER_FCU_FIFERR=0x02,IER_FCU_FRDYI=0x02,
01306 IER_ICU_SWINT2=0x03,IER_ICU_SWINT=0x03,
01307 IER_CMT0_CMI0=0x03,
01308 IER_CMT1_CMI1=0x03,
01309 IER_CMTW0_CMWI0=0x03,
01310 IER_CMTW1_CMWI1=0x03,
01311 IER_USB0_D0FIFO0=0x04,IER_USB0_D1FIFO0=0x04,
01312 IER_RSPI0_SPRI0=0x04,IER_RSPI0_SPTI0=0x04,
01313 IER_RSPI1_SPRI1=0x05,IER_RSPI1_SPTI1=0x05,
01314 IER_QSPI_SPRI=0x05,IER_QSPI_SPTI=0x05,
01315 IER_SDHI_SBFBI=0x05,
01316 IER_MMCIF_MBFBI=0x05,
01317 IER_SSIE0_SSITXI0=0x05,IER_SSIE0_SSIRXI0=0x05,
01318 IER_SSIE1_SSIRTII=0x06,
01319 IER_RIIC1_RXI1=0x06,IER_RIIC1_TXI1=0x06,
01320 IER_RIIC0_RXI0=0x06,IER_RIIC0_TXI0=0x06,
01321 IER_RIIC2_RXI2=0x06,IER_RIIC2_TXI2=0x06,
01322 IER_SCI0_RXI0=0x07,IER_SCI0_TXI0=0x07,
01323 IER_SCI1_RXI1=0x07,IER_SCI1_TXI1=0x07,
01324 IER_SCI2_RXI2=0x07,IER_SCI2_TXI2=0x07,
01325 IER_ICU_IRQ0=0x08,IER_ICU_IRQ1=0x08,IER_ICU_IRQ2=0x08,IER_ICU_IRQ3=0x08,IER_ICU_IRQ4=0x08,IER_ICU_IRQ5=0x08,
01326 IER_ICU_IRQ8=0x09,IER_ICU_IRQ9=0x09,IER_ICU_IRQ10=0x09,IER_ICU_IRQ11=0x09,IER_ICU_IRQ12=0x09,IER_ICU_IRQ13=0x09,
01327 IER_SCI3_RXI3=0x0A,IER_SCI3_TXI3=0x0A,
01328 IER_SCI4_RXI4=0x0A,IER_SCI4_TXI4=0x0A,
01329 IER_SCI5_RXI5=0x0A,IER_SCI5_TXI5=0x0A,
01330 IER_SCI6_RXI6=0x0A,IER_SCI6_TXI6=0x0A,
01331 IER_LVD1_LVD1=0x0B,
01332 IER_LVD2_LVD2=0x0B,
01333 IER_USB0_USBR0=0x0B,
01334 IER_RTC_ALM=0x0B,IER_RTC_PRD=0x0B,
```

```
01335 IER_IWDT_IWUNI=0x0B,
01336 IER_WDT_WUNI=0x0C,
01337 IER_PDC_PCDFI=0x0C,
01338 IER_SCI7_RXI7=0x0C,IER_SCI7_TXI7=0x0C,
01339 IER_SCI8_RXI8=0x0C,IER_SCI8_TXI8=0x0C,
01340 IER_SCI9_RXI9=0x0C,IER_SCI9_TXI9=0x0C,
01341 IER_SCI10_RXI10=0x0D,IER_SCI10_TXI10=0x0D,
01342 IER_ICU_GROUPBE0=0x0D,IER_ICU_GROUPBL2=0x0D,
01343 IER_RSPI2_SPRI2=0x0D,IER_RSPI2_SPTI2=0x0D,
01344
    IER_ICU_GROUPBL0=0x0D,IER_ICU_GROUPBL1=0x0D,IER_ICU_GROUPAL0=0x0E,IER_ICU_GROUPAL1=0x0E,
01345 IER_SCI11_RXI11=0x0E,IER_SCI11_TXI11=0x0E,
01346 IER_SCI12_RXI12=0x0E,IER_SCI12_TXI12=0x0E,
01347
    IER_DMAC_DMAC0I=0x0F,IER_DMAC_DMAC1I=0x0F,IER_DMAC_DMAC2I=0x0F,IER_DMAC_DMAC3I=0x0F,IER_DMAC_DMA
01348 IER_OST_OSTDI=0x0F,
01349 IER_EXDMAC_EXDMAC0I=0x0F,IER_EXDMAC_EXDMAC1I=0x0F,
01350
    IER_PERIB_INTB128=0x10,IER_PERIB_INTB129=0x10,IER_PERIB_INTB130=0x10,IER_PERIB_INTB131=0x10,IER_PERIB_INTB
01351
    IER_PERIB_INTB133=0x10,IER_PERIB_INTB134=0x10,IER_PERIB_INTB135=0x10,IER_PERIB_INTB136=0x11,IER_PERIB_INTB
01352
    IER_PERIB_INTB138=0x11,IER_PERIB_INTB139=0x11,IER_PERIB_INTB140=0x11,IER_PERIB_INTB141=0x11,IER_PERIB_INTB
01353
    IER_PERIB_INTB143=0x11,IER_PERIB_INTB144=0x12,IER_PERIB_INTB145=0x12,IER_PERIB_INTB146=0x12,IER_PERIB_INTB
01354
    IER_PERIB_INTB148=0x12,IER_PERIB_INTB149=0x12,IER_PERIB_INTB150=0x12,IER_PERIB_INTB151=0x12,IER_PERIB_INTB
01355
    IER_PERIB_INTB153=0x13,IER_PERIB_INTB154=0x13,IER_PERIB_INTB155=0x13,IER_PERIB_INTB156=0x13,IER_PERIB_INTB
01356
    IER_PERIB_INTB158=0x13,IER_PERIB_INTB159=0x13,IER_PERIB_INTB160=0x14,IER_PERIB_INTB161=0x14,IER_PERIB_INTB
01357
    IER_PERIB_INTB163=0x14,IER_PERIB_INTB164=0x14,IER_PERIB_INTB165=0x14,IER_PERIB_INTB166=0x14,IER_PERIB_INTB
01358
    IER_PERIB_INTB168=0x15,IER_PERIB_INTB169=0x15,IER_PERIB_INTB170=0x15,IER_PERIB_INTB171=0x15,IER_PERIB_INTB
01359
    IER_PERIB_INTB173=0x15,IER_PERIB_INTB174=0x15,IER_PERIB_INTB175=0x15,IER_PERIB_INTB176=0x16,IER_PERIB_INTB
01360
    IER_PERIB_INTB178=0x16,IER_PERIB_INTB179=0x16,IER_PERIB_INTB180=0x16,IER_PERIB_INTB181=0x16,IER_PERIB_INTB
01361
    IER_PERIB_INTB183=0x16,IER_PERIB_INTB184=0x17,IER_PERIB_INTB185=0x17,IER_PERIB_INTB186=0x17,IER_PERIB_INTB
01362
    IER_PERIB_INTB188=0x17,IER_PERIB_INTB189=0x17,IER_PERIB_INTB190=0x17,IER_PERIB_INTB191=0x17,IER_PERIB_INTB
01363
    IER_PERIB_INTB193=0x18,IER_PERIB_INTB194=0x18,IER_PERIB_INTB195=0x18,IER_PERIB_INTB196=0x18,IER_PERIB_INTB
01364
    IER_PERIB_INTB198=0x18,IER_PERIB_INTB199=0x18,IER_PERIB_INTB200=0x19,IER_PERIB_INTB201=0x19,IER_PERIB_INTB
01365
    IER_PERIB_INTB203=0x19,IER_PERIB_INTB204=0x19,IER_PERIB_INTB205=0x19,IER_PERIB_INTB206=0x19,IER_PERIB_INTB
01366
    IER_PERIA_INTA208=0x1A,IER_PERIA_INTA209=0x1A,IER_PERIA_INTA210=0x1A,IER_PERIA_INTA211=0x1A,IER_PERIA_INT
01367
    IER_PERIA_INTA213=0x1A,IER_PERIA_INTA214=0x1A,IER_PERIA_INTA215=0x1A,IER_PERIA_INTA216=0x1B,IER_PERIA_INT
01368
    IER_PERIA_INTA218=0x1B,IER_PERIA_INTA219=0x1B,IER_PERIA_INTA220=0x1B,IER_PERIA_INTA221=0x1B,IER_PERIA_INT
01369
    IER_PERIA_INTA223=0x1B,IER_PERIA_INTA224=0x1C,IER_PERIA_INTA225=0x1C,IER_PERIA_INTA226=0x1C,IER_PERIA_INT
01370
    IER_PERIA_INTA228=0x1C,IER_PERIA_INTA229=0x1C,IER_PERIA_INTA230=0x1C,IER_PERIA_INTA231=0x1C,IER_PERIA_INT
01371
    IER_PERIA_INTA233=0x1D,IER_PERIA_INTA234=0x1D,IER_PERIA_INTA235=0x1D,IER_PERIA_INTA236=0x1D,IER_PERIA_INT
01372
    IER_PERIA_INTA238=0x1D,IER_PERIA_INTA239=0x1D,IER_PERIA_INTA240=0x1E,IER_PERIA_INTA241=0x1E,IER_PERIA_INT
01373
    IER_PERIA_INTA243=0x1E,IER_PERIA_INTA244=0x1E,IER_PERIA_INTA245=0x1E,IER_PERIA_INTA246=0x1E,IER_PERIA_INT
01374
    IER_PERIA_INTA248=0x1F,IER_PERIA_INTA249=0x1F,IER_PERIA_INTA250=0x1F,IER_PERIA_INTA251=0x1F,IER_PERIA_INT
01375 IER_PERIA_INTA253=0x1F,IER_PERIA_INTA254=0x1F,IER_PERIA_INTA255=0x1F
01376 } enum_ier_t;
01377
01378 typedef enum enum_ipr {
01379 IPR_BSC_BUSERR=0,
01380 IPR_ICU_GROUPIE0=0,
01381 IPR_RAM_RAMERR=0,
01382 IPR_FCU_FIFERR=1,IPR_FCU_FRDYI=2,
01383 IPR_ICU_SWINT2=3,IPR_ICU_SWINT=3,
01384 IPR_CMT0_CMI0=4,
01385 IPR_CMT1_CMI1=5,
01386 IPR_CMTW0_CMWI0=6,
01387 IPR_CMTW1_CMWI1=7,
01388 IPR_USB0_D0FIFO0=34,IPR_USB0_D1FIFO0=35,
01389 IPR_RSPI0_SPRI0=38,IPR_RSPI0_SPTI0=39,
01390 IPR_RSPI1_SPRI1=40,IPR_RSPI1_SPTI1=41,
01391 IPR_QSPI_SPRI=42,IPR_QSPI_SPTI=43,
01392 IPR_SDHI_SBFBI=44,
01393 IPR_MMCI0_MBFBI=45,
01394 IPR_SSIE0_SSITXI0=46,IPR_SSIE0_SSIRXI0=47,
```

```
01395 IPR_SSIE1_SSIRT1I=48,
01396 IPR_RHIC1_RXI1=50,IPR_RHIC1_TXI1=51,
01397 IPR_RHIC0_RXI0=52,IPR_RHIC0_TXI0=53,
01398 IPR_RHIC2_RXI2=54,IPR_RHIC2_TXI2=55,
01399 IPR_SCI0_RXI0=58,IPR_SCI0_TXI0=59,
01400 IPR_SCI1_RXI1=60,IPR_SCI1_TXI1=61,
01401 IPR_SCI2_RXI2=62,IPR_SCI2_TXI2=63,
01402 IPR_ICU_IRQ0=64,IPR_ICU_IRQ1=65,IPR_ICU_IRQ2=66,IPR_ICU_IRQ3=67,IPR_ICU_IRQ4=68,IPR_ICU_IRQ5=69,IPR_ICU_IRQ6=70,IPR_ICU_IRQ7=71,
01403 IPR_ICU_IRQ8=72,IPR_ICU_IRQ9=73,IPR_ICU_IRQ10=74,IPR_ICU_IRQ11=75,IPR_ICU_IRQ12=76,IPR_ICU_IRQ13=77,IPR_ICU_IRQ14=78,IPR_ICU_IRQ15=79,
01404 IPR_SCI3_RXI3=80,IPR_SCI3_TXI3=81,
01405 IPR_SCI4_RXI4=82,IPR_SCI4_TXI4=83,
01406 IPR_SCI5_RXI5=84,IPR_SCI5_TXI5=85,
01407 IPR_SCI6_RXI6=86,IPR_SCI6_TXI6=87,
01408 IPR_LVD1_LVD1=88,
01409 IPR_LVD2_LVD2=89,
01410 IPR_USB0_USBR0=90,
01411 IPR_RTC_ALM=92,IPR_RTC_PRD=93,
01412 IPR_IWDT_IWUNI=95,
01413 IPR_WDT_WUNI=96,
01414 IPR_PDC_PCDFI=97,
01415 IPR_SCI7_RXI7=98,IPR_SCI7_TXI7=99,
01416 IPR_SCI8_RXI8=100,IPR_SCI8_TXI8=101,
01417 IPR_SCI9_RXI9=102,IPR_SCI9_TXI9=103,
01418 IPR_SCI10_RXI10=104,IPR_SCI10_TXI10=105,
01419 IPR_ICU_GROUPBE0=106,IPR_ICU_GROUPBL2=107,
01420 IPR_RSPI2_SPRI2=108,IPR_RSPI2_SPTI2=109,
01421 IPR_ICU_GROUPBL0=110,IPR_ICU_GROUPBL1=111,IPR_ICU_GROUPAL0=112,IPR_ICU_GROUPAL1=113,
01422 IPR_SCI11_RXI11=114,IPR_SCI11_TXI11=115,
01423 IPR_SCI12_RXI12=116,IPR_SCI12_TXI12=117,
01424 IPR_DMACE0_DMACE0I=120,IPR_DMACE0_DMACE0I=121,IPR_DMACE0_DMACE0I=122,IPR_DMACE0_DMACE0I=123,IPR_DMACE0_DMACE0I=124,IPR_DMACE0_DMACE0I=125,IPR_DMACE0_DMACE0I=126,IPR_DMACE0_DMACE0I=127,
01425 IPR_OST_OSTDI=125,
01426 IPR_EXDMACE0_EXDMACE0I=126,IPR_EXDMACE0_EXDMACE0I=127,
01427 IPR_PERIB_INTB128=128,IPR_PERIB_INTB129=129,IPR_PERIB_INTB130=130,IPR_PERIB_INTB131=131,IPR_PERIB_INTB132=132,IPR_PERIB_INTB133=133,IPR_PERIB_INTB134=134,IPR_PERIB_INTB135=135,IPR_PERIB_INTB136=136,IPR_PERIB_INTB137=137,IPR_PERIB_INTB138=138,IPR_PERIB_INTB139=139,IPR_PERIB_INTB140=140,IPR_PERIB_INTB141=141,IPR_PERIB_INTB142=142,IPR_PERIB_INTB143=143,IPR_PERIB_INTB144=144,IPR_PERIB_INTB145=145,IPR_PERIB_INTB146=146,IPR_PERIB_INTB147=147,IPR_PERIB_INTB148=148,IPR_PERIB_INTB149=149,IPR_PERIB_INTB150=150,IPR_PERIB_INTB151=151,IPR_PERIB_INTB152=152,IPR_PERIB_INTB153=153,IPR_PERIB_INTB154=154,IPR_PERIB_INTB155=155,IPR_PERIB_INTB156=156,IPR_PERIB_INTB157=157,IPR_PERIB_INTB158=158,IPR_PERIB_INTB159=159,IPR_PERIB_INTB160=160,IPR_PERIB_INTB161=161,IPR_PERIB_INTB162=162,IPR_PERIB_INTB163=163,IPR_PERIB_INTB164=164,IPR_PERIB_INTB165=165,IPR_PERIB_INTB166=166,IPR_PERIB_INTB167=167,IPR_PERIB_INTB168=168,IPR_PERIB_INTB169=169,IPR_PERIB_INTB170=170,IPR_PERIB_INTB171=171,IPR_PERIB_INTB172=172,IPR_PERIB_INTB173=173,IPR_PERIB_INTB174=174,IPR_PERIB_INTB175=175,IPR_PERIB_INTB176=176,IPR_PERIB_INTB177=177,IPR_PERIB_INTB178=178,IPR_PERIB_INTB179=179,IPR_PERIB_INTB180=180,IPR_PERIB_INTB181=181,IPR_PERIB_INTB182=182,IPR_PERIB_INTB183=183,IPR_PERIB_INTB184=184,IPR_PERIB_INTB185=185,IPR_PERIB_INTB186=186,IPR_PERIB_INTB187=187,IPR_PERIB_INTB188=188,IPR_PERIB_INTB189=189,IPR_PERIB_INTB190=190,IPR_PERIB_INTB191=191,IPR_PERIB_INTB192=192,IPR_PERIB_INTB193=193,IPR_PERIB_INTB194=194,IPR_PERIB_INTB195=195,IPR_PERIB_INTB196=196,IPR_PERIB_INTB197=197,IPR_PERIB_INTB198=198,IPR_PERIB_INTB199=199,IPR_PERIB_INTB200=200,IPR_PERIB_INTB201=201,IPR_PERIB_INTB202=202,IPR_PERIB_INTB203=203,IPR_PERIB_INTB204=204,IPR_PERIB_INTB205=205,IPR_PERIB_INTB206=206,IPR_PERIB_INTB207=207,IPR_PERIB_INTB208=208,IPR_PERIB_INTB209=209,IPR_PERIB_INTB210=210,IPR_PERIB_INTB211=211,IPR_PERIB_INTB212=212,IPR_PERIB_INTB213=213,IPR_PERIB_INTB214=214,IPR_PERIB_INTB215=215,IPR_PERIB_INTB216=216,IPR_PERIB_INTB217=217,IPR_PERIB_INTB218=218,IPR_PERIB_INTB219=219,IPR_PERIB_INTB220=220,IPR_PERIB_INTB221=221,IPR_PERIB_INTB222=222,IPR_PERIB_INTB223=223,IPR_PERIB_INTB224=224,IPR_PERIB_INTB225=225,IPR_PERIB_INTB226=226,IPR_PERIB_INTB227=227,IPR_PERIB_INTB228=228,IPR_PERIB_INTB229=229,IPR_PERIB_INTB230=230,IPR_PERIB_INTB231=231,IPR_PERIB_INTB232=232,IPR_PERIB_INTB233=233,IPR_PERIB_INTB234=234,IPR_PERIB_INTB235=235,IPR_PERIB_INTB236=236,IPR_PERIB_INTB237=237,IPR_PERIB_INTB238=238,IPR_PERIB_INTB239=239,IPR_PERIB_INTB240=240,IPR_PERIB_INTB241=241,IPR_PERIB_INTB242=242,IPR_PERIB_INTB243=243,IPR_PERIB_INTB244=244,IPR_PERIB_INTB245=245,IPR_PERIB_INTB246=246,IPR_PERIB_INTB247=247,IPR_PERIB_INTB248=248,IPR_PERIB_INTB249=249,IPR_PERIB_INTB250=250,IPR_PERIB_INTB251=251,IPR_PERIB_INTB252=252,IPR_PERIB_INTB253=253,IPR_PERIB_INTB254=254,IPR_PERIB_INTB255=255,IPR_ICU_SWI=3,
```

```
01454 IPR_CMT0_=4,
01455 IPR_CMT1_=5,
01456 IPR_CMTW0_=6,
01457 IPR_CMTW1_=7,
01458 IPR_SDHI_=44,
01459 IPR_MMCIIF_=45,
01460 IPR_SSIE1_=48,
01461 IPR_LVD1_=88,
01462 IPR_LVD2_=89,
01463 IPR_IWDT_=95,
01464 IPR_WDT_=96,
01465 IPR_PDC_=97,
01466 IPR_OST_=125
01467 } enum_ipr_t;
01468
01469
01470 #pragma pack(4)
01471
01472
01473 typedef struct st_bsc {
01474     union {
01475         unsigned char BYTE;
01476         struct {
01477
01478 #ifdef __RX_LITTLE_ENDIAN__
01479         unsigned char STSCLR : 1;
01480         unsigned char : 7;
01481 #else
01482         unsigned char : 7;
01483         unsigned char STSCLR : 1;
01484 #endif
01485         } BIT;
01486         } BERCLR;
01487         char wk0[3];
01488         union {
01489             unsigned char BYTE;
01490             struct {
01491
01492 #ifdef __RX_LITTLE_ENDIAN__
01493             unsigned char IGAEN : 1;
01494             unsigned char TOEN : 1;
01495             unsigned char : 6;
01496 #else
01497             unsigned char : 6;
01498             unsigned char TOEN : 1;
01499             unsigned char IGAEN : 1;
01500 #endif
01501             } BIT;
01502             } BEREN;
01503             char wk1[3];
01504             union {
01505                 unsigned char BYTE;
01506                 struct {
01507
01508 #ifdef __RX_LITTLE_ENDIAN__
01509                 unsigned char IA : 1;
01510                 unsigned char TO : 1;
01511                 unsigned char : 2;
01512                 unsigned char MST : 3;
01513                 unsigned char : 1;
01514 #else
01515                 unsigned char : 1;
01516                 unsigned char MST : 3;
01517                 unsigned char : 2;
01518                 unsigned char TO : 1;
01519                 unsigned char IA : 1;
01520 #endif
01521                 } BIT;
01522                 } BERSR1;
01523                 char wk2[1];
01524                 union {
01525                     unsigned short WORD;
01526                     struct {
01527
01528 #ifdef __RX_LITTLE_ENDIAN__
01529                     unsigned short : 3;
01530                     unsigned short ADDR : 13;
01531 #else
01532                     unsigned short ADDR : 13;
01533                     unsigned short : 3;
01534 #endif
01535                     } BIT;
01536                     } BERSR2;
01537                     char wk3[4];
01538                     union {
01539                         unsigned short WORD;
01540                         struct {
```

```

01541
01542 #ifdef __RX_LITTLE_ENDIAN__
01543     unsigned short BPRA : 2;
01544     unsigned short BPRO : 2;
01545     unsigned short BPIB : 2;
01546     unsigned short BPGB : 2;
01547     unsigned short BPHB : 2;
01548     unsigned short BPFB : 2;
01549     unsigned short BPEB : 2;
01550     unsigned short : 2;
01551 #else
01552     unsigned short : 2;
01553     unsigned short BPEB : 2;
01554     unsigned short BPFB : 2;
01555     unsigned short BPHB : 2;
01556     unsigned short BPGB : 2;
01557     unsigned short BPIB : 2;
01558     unsigned short BPRO : 2;
01559     unsigned short BPRA : 2;
01560 #endif
01561 } BIT;
01562 } BUSPRI;
01563 char wk4[7408];
01564 union {
01565     unsigned short WORD;
01566     struct {
01567
01568 #ifdef __RX_LITTLE_ENDIAN__
01569         unsigned short WRMOD : 1;
01570         unsigned short : 2;
01571         unsigned short EWENB : 1;
01572         unsigned short : 4;
01573         unsigned short PRENB : 1;
01574         unsigned short PWENB : 1;
01575         unsigned short : 5;
01576         unsigned short PRMOD : 1;
01577 #else
01578         unsigned short PRMOD : 1;
01579         unsigned short : 5;
01580         unsigned short PWENB : 1;
01581         unsigned short PRENB : 1;
01582         unsigned short : 4;
01583         unsigned short EWENB : 1;
01584         unsigned short : 2;
01585         unsigned short WRMOD : 1;
01586 #endif
01587     } BIT;
01588     } CS0MOD;
01589     union {
01590         unsigned long LONG;
01591         struct {
01592
01593 #ifdef __RX_LITTLE_ENDIAN__
01594             unsigned long CSPWAIT : 3;
01595             unsigned long : 5;
01596             unsigned long CSPRWAIT : 3;
01597             unsigned long : 5;
01598             unsigned long CSWWAIT : 5;
01599             unsigned long : 3;
01600             unsigned long CSRWAIT : 5;
01601             unsigned long : 3;
01602 #else
01603             unsigned long : 3;
01604             unsigned long CSRWAIT : 5;
01605             unsigned long : 3;
01606             unsigned long CSWWAIT : 5;
01607             unsigned long : 5;
01608             unsigned long CSPRWAIT : 3;
01609             unsigned long : 5;
01610             unsigned long CSPWAIT : 3;
01611 #endif
01612         } BIT;
01613         } CS0WCR1;
01614         union {
01615             unsigned long LONG;
01616             struct {
01617
01618 #ifdef __RX_LITTLE_ENDIAN__
01619                 unsigned long CSROFF : 3;
01620                 unsigned long : 1;
01621                 unsigned long CSWOFF : 3;
01622                 unsigned long : 1;
01623                 unsigned long WDOFF : 3;
01624                 unsigned long : 1;
01625                 unsigned long AWAIT : 2;
01626                 unsigned long : 2;
01627                 unsigned long RDON : 3;

```

```
01628         unsigned long : 1;
01629         unsigned long WRON : 3;
01630         unsigned long : 1;
01631         unsigned long WDON : 3;
01632         unsigned long : 1;
01633         unsigned long CSON : 3;
01634         unsigned long : 1;
01635 #else
01636         unsigned long : 1;
01637         unsigned long CSON : 3;
01638         unsigned long : 1;
01639         unsigned long WDON : 3;
01640         unsigned long : 1;
01641         unsigned long WRON : 3;
01642         unsigned long : 1;
01643         unsigned long RDON : 3;
01644         unsigned long : 2;
01645         unsigned long AWAIT : 2;
01646         unsigned long : 1;
01647         unsigned long WDOFF : 3;
01648         unsigned long : 1;
01649         unsigned long CSWOFF : 3;
01650         unsigned long : 1;
01651         unsigned long CSROFF : 3;
01652 #endif
01653     } BIT;
01654     } CS0WCR2;
01655     char      wk5[6];
01656     union {
01657         unsigned short WORD;
01658         struct {
01659
01660 #ifdef __RX_LITTLE_ENDIAN__
01661         unsigned short WRMOD : 1;
01662         unsigned short : 2;
01663         unsigned short EWENB : 1;
01664         unsigned short : 4;
01665         unsigned short PRENB : 1;
01666         unsigned short PWENB : 1;
01667         unsigned short : 5;
01668         unsigned short PRMOD : 1;
01669 #else
01670         unsigned short PRMOD : 1;
01671         unsigned short : 5;
01672         unsigned short PWENB : 1;
01673         unsigned short PRENB : 1;
01674         unsigned short : 4;
01675         unsigned short EWENB : 1;
01676         unsigned short : 2;
01677         unsigned short WRMOD : 1;
01678 #endif
01679     } BIT;
01680     } CS1MOD;
01681     union {
01682         unsigned long LONG;
01683         struct {
01684
01685 #ifdef __RX_LITTLE_ENDIAN__
01686         unsigned long CSPWWAIT : 3;
01687         unsigned long : 5;
01688         unsigned long CSPRWAIT : 3;
01689         unsigned long : 5;
01690         unsigned long CSWWAIT : 5;
01691         unsigned long : 3;
01692         unsigned long CSRWAIT : 5;
01693         unsigned long : 3;
01694 #else
01695         unsigned long : 3;
01696         unsigned long CSRWAIT : 5;
01697         unsigned long : 3;
01698         unsigned long CSWWAIT : 5;
01699         unsigned long : 5;
01700         unsigned long CSPRWAIT : 3;
01701         unsigned long : 5;
01702         unsigned long CSPWWAIT : 3;
01703 #endif
01704     } BIT;
01705     } CS1WCR1;
01706     union {
01707         unsigned long LONG;
01708         struct {
01709
01710 #ifdef __RX_LITTLE_ENDIAN__
01711         unsigned long CSROFF : 3;
01712         unsigned long : 1;
01713         unsigned long CSWOFF : 3;
01714         unsigned long : 1;
```

```

01715         unsigned long WDOFF : 3;
01716         unsigned long : 1;
01717         unsigned long AWAIT : 2;
01718         unsigned long : 2;
01719         unsigned long RDON : 3;
01720         unsigned long : 1;
01721         unsigned long WRON : 3;
01722         unsigned long : 1;
01723         unsigned long WDON : 3;
01724         unsigned long : 1;
01725         unsigned long CSON : 3;
01726         unsigned long : 1;
01727 #else
01728         unsigned long : 1;
01729         unsigned long CSON : 3;
01730         unsigned long : 1;
01731         unsigned long WDON : 3;
01732         unsigned long : 1;
01733         unsigned long WRON : 3;
01734         unsigned long : 1;
01735         unsigned long RDON : 3;
01736         unsigned long : 2;
01737         unsigned long AWAIT : 2;
01738         unsigned long : 1;
01739         unsigned long WDOFF : 3;
01740         unsigned long : 1;
01741         unsigned long CSWOFF : 3;
01742         unsigned long : 1;
01743         unsigned long CSROFF : 3;
01744 #endif
01745     } BIT;
01746     } CS1WCR2;
01747     char        wk6[6];
01748     union {
01749         unsigned short WORD;
01750         struct {
01751
01752 #ifdef __RX_LITTLE_ENDIAN__
01753         unsigned short WRMOD : 1;
01754         unsigned short : 2;
01755         unsigned short EWENB : 1;
01756         unsigned short : 4;
01757         unsigned short PRENB : 1;
01758         unsigned short PWENB : 1;
01759         unsigned short : 5;
01760         unsigned short PRMOD : 1;
01761 #else
01762         unsigned short PRMOD : 1;
01763         unsigned short : 5;
01764         unsigned short PWENB : 1;
01765         unsigned short PRENB : 1;
01766         unsigned short : 4;
01767         unsigned short EWENB : 1;
01768         unsigned short : 2;
01769         unsigned short WRMOD : 1;
01770 #endif
01771         } BIT;
01772         } CS2MOD;
01773         union {
01774             unsigned long LONG;
01775             struct {
01776
01777 #ifdef __RX_LITTLE_ENDIAN__
01778             unsigned long CSPWAIT : 3;
01779             unsigned long : 5;
01780             unsigned long CSPRWAIT : 3;
01781             unsigned long : 5;
01782             unsigned long CSWWAIT : 5;
01783             unsigned long : 3;
01784             unsigned long CSRWAIT : 5;
01785             unsigned long : 3;
01786 #else
01787             unsigned long : 3;
01788             unsigned long CSRWAIT : 5;
01789             unsigned long : 3;
01790             unsigned long CSWWAIT : 5;
01791             unsigned long : 5;
01792             unsigned long CSPRWAIT : 3;
01793             unsigned long : 5;
01794             unsigned long CSPWAIT : 3;
01795 #endif
01796         } BIT;
01797         } CS2WCR1;
01798         union {
01799             unsigned long LONG;
01800             struct {
01801

```

```

01802 #ifndef __RX_LITTLE_ENDIAN__
01803     unsigned long CSROFF : 3;
01804     unsigned long : 1;
01805     unsigned long CSWOFF : 3;
01806     unsigned long : 1;
01807     unsigned long WDOFF : 3;
01808     unsigned long : 1;
01809     unsigned long AWAIT : 2;
01810     unsigned long : 2;
01811     unsigned long RDON : 3;
01812     unsigned long : 1;
01813     unsigned long WRON : 3;
01814     unsigned long : 1;
01815     unsigned long WDON : 3;
01816     unsigned long : 1;
01817     unsigned long CSON : 3;
01818     unsigned long : 1;
01819 #else
01820     unsigned long : 1;
01821     unsigned long CSON : 3;
01822     unsigned long : 1;
01823     unsigned long WDON : 3;
01824     unsigned long : 1;
01825     unsigned long WRON : 3;
01826     unsigned long : 1;
01827     unsigned long RDON : 3;
01828     unsigned long : 2;
01829     unsigned long AWAIT : 2;
01830     unsigned long : 1;
01831     unsigned long WDOFF : 3;
01832     unsigned long : 1;
01833     unsigned long CSWOFF : 3;
01834     unsigned long : 1;
01835     unsigned long CSROFF : 3;
01836 #endif
01837 } BIT;
01838 } CS2WCR2;
01839 char wk7[6];
01840 union {
01841     unsigned short WORD;
01842     struct {
01843
01844 #ifndef __RX_LITTLE_ENDIAN__
01845         unsigned short WRMOD : 1;
01846         unsigned short : 2;
01847         unsigned short EWENB : 1;
01848         unsigned short : 4;
01849         unsigned short PRENB : 1;
01850         unsigned short PWENB : 1;
01851         unsigned short : 5;
01852         unsigned short PRMOD : 1;
01853 #else
01854         unsigned short PRMOD : 1;
01855         unsigned short : 5;
01856         unsigned short PWENB : 1;
01857         unsigned short PRENB : 1;
01858         unsigned short : 4;
01859         unsigned short EWENB : 1;
01860         unsigned short : 2;
01861         unsigned short WRMOD : 1;
01862 #endif
01863     } BIT;
01864     } CS3MOD;
01865     union {
01866         unsigned long LONG;
01867         struct {
01868
01869 #ifndef __RX_LITTLE_ENDIAN__
01870             unsigned long CSPWAIT : 3;
01871             unsigned long : 5;
01872             unsigned long CSPRWAIT : 3;
01873             unsigned long : 5;
01874             unsigned long CSWWAIT : 5;
01875             unsigned long : 3;
01876             unsigned long CSRWAIT : 5;
01877             unsigned long : 3;
01878 #else
01879             unsigned long : 3;
01880             unsigned long CSRWAIT : 5;
01881             unsigned long : 3;
01882             unsigned long CSWWAIT : 5;
01883             unsigned long : 5;
01884             unsigned long CSPRWAIT : 3;
01885             unsigned long : 5;
01886             unsigned long CSPWAIT : 3;
01887 #endif
01888         } BIT;

```

```

01889     } CS3WCR1;
01890     union {
01891         unsigned long LONG;
01892         struct {
01893
01894 #ifdef __RX_LITTLE_ENDIAN__
01895         unsigned long CSROFF : 3;
01896         unsigned long : 1;
01897         unsigned long CSWOFF : 3;
01898         unsigned long : 1;
01899         unsigned long WDOFF : 3;
01900         unsigned long : 1;
01901         unsigned long AWAIT : 2;
01902         unsigned long : 2;
01903         unsigned long RDON : 3;
01904         unsigned long : 1;
01905         unsigned long WRON : 3;
01906         unsigned long : 1;
01907         unsigned long WDON : 3;
01908         unsigned long : 1;
01909         unsigned long CSON : 3;
01910         unsigned long : 1;
01911 #else
01912         unsigned long : 1;
01913         unsigned long CSON : 3;
01914         unsigned long : 1;
01915         unsigned long WDON : 3;
01916         unsigned long : 1;
01917         unsigned long WRON : 3;
01918         unsigned long : 1;
01919         unsigned long RDON : 3;
01920         unsigned long : 2;
01921         unsigned long AWAIT : 2;
01922         unsigned long : 1;
01923         unsigned long WDOFF : 3;
01924         unsigned long : 1;
01925         unsigned long CSWOFF : 3;
01926         unsigned long : 1;
01927         unsigned long CSROFF : 3;
01928 #endif
01929     } BIT;
01930     } CS3WCR2;
01931     char        wk8[6];
01932     union {
01933         unsigned short WORD;
01934         struct {
01935
01936 #ifdef __RX_LITTLE_ENDIAN__
01937         unsigned short WRMOD : 1;
01938         unsigned short : 2;
01939         unsigned short EWENB : 1;
01940         unsigned short : 4;
01941         unsigned short PRENB : 1;
01942         unsigned short PWENB : 1;
01943         unsigned short : 5;
01944         unsigned short PRMOD : 1;
01945 #else
01946         unsigned short PRMOD : 1;
01947         unsigned short : 5;
01948         unsigned short PWENB : 1;
01949         unsigned short PRENB : 1;
01950         unsigned short : 4;
01951         unsigned short EWENB : 1;
01952         unsigned short : 2;
01953         unsigned short WRMOD : 1;
01954 #endif
01955     } BIT;
01956     } CS4MOD;
01957     union {
01958         unsigned long LONG;
01959         struct {
01960
01961 #ifdef __RX_LITTLE_ENDIAN__
01962         unsigned long CSPWWAIT : 3;
01963         unsigned long : 5;
01964         unsigned long CSPRWAIT : 3;
01965         unsigned long : 5;
01966         unsigned long CSWWAIT : 5;
01967         unsigned long : 3;
01968         unsigned long CSRWAIT : 5;
01969         unsigned long : 3;
01970 #else
01971         unsigned long : 3;
01972         unsigned long CSRWAIT : 5;
01973         unsigned long : 3;
01974         unsigned long CSWWAIT : 5;
01975         unsigned long : 5;

```

```

01976         unsigned long CSPRWAIT : 3;
01977         unsigned long   : 5;
01978         unsigned long CSPPWAIT : 3;
01979 #endif
01980     } BIT;
01981     } CS4WCR1;
01982     union {
01983         unsigned long LONG;
01984         struct {
01985
01986 #ifdef __RX_LITTLE_ENDIAN__
01987         unsigned long CSROFF : 3;
01988         unsigned long   : 1;
01989         unsigned long CSWOFF : 3;
01990         unsigned long   : 1;
01991         unsigned long WDOFF : 3;
01992         unsigned long   : 1;
01993         unsigned long AWAIT : 2;
01994         unsigned long   : 2;
01995         unsigned long RDON : 3;
01996         unsigned long   : 1;
01997         unsigned long WRON : 3;
01998         unsigned long   : 1;
01999         unsigned long WDON : 3;
02000         unsigned long   : 1;
02001         unsigned long CSON : 3;
02002         unsigned long   : 1;
02003 #else
02004         unsigned long   : 1;
02005         unsigned long CSON : 3;
02006         unsigned long   : 1;
02007         unsigned long WDON : 3;
02008         unsigned long   : 1;
02009         unsigned long WRON : 3;
02010         unsigned long   : 1;
02011         unsigned long RDON : 3;
02012         unsigned long   : 2;
02013         unsigned long AWAIT : 2;
02014         unsigned long   : 1;
02015         unsigned long WDOFF : 3;
02016         unsigned long   : 1;
02017         unsigned long CSWOFF : 3;
02018         unsigned long   : 1;
02019         unsigned long CSROFF : 3;
02020 #endif
02021     } BIT;
02022     } CS4WCR2;
02023     char      wk9[6];
02024     union {
02025         unsigned short WORD;
02026         struct {
02027
02028 #ifdef __RX_LITTLE_ENDIAN__
02029         unsigned short WRMOD : 1;
02030         unsigned short   : 2;
02031         unsigned short EWENB : 1;
02032         unsigned short   : 4;
02033         unsigned short PRENB : 1;
02034         unsigned short PWENB : 1;
02035         unsigned short   : 5;
02036         unsigned short PRMOD : 1;
02037 #else
02038         unsigned short PRMOD : 1;
02039         unsigned short   : 5;
02040         unsigned short PWENB : 1;
02041         unsigned short PRENB : 1;
02042         unsigned short   : 4;
02043         unsigned short EWENB : 1;
02044         unsigned short   : 2;
02045         unsigned short WRMOD : 1;
02046 #endif
02047     } BIT;
02048     } CS5MOD;
02049     union {
02050         unsigned long LONG;
02051         struct {
02052
02053 #ifdef __RX_LITTLE_ENDIAN__
02054         unsigned long CSPPWAIT : 3;
02055         unsigned long   : 5;
02056         unsigned long CSPRWAIT : 3;
02057         unsigned long   : 5;
02058         unsigned long CSWWAIT : 5;
02059         unsigned long   : 3;
02060         unsigned long CSRWAIT : 5;
02061         unsigned long   : 3;
02062 #else

```

```

02063         unsigned long : 3;
02064         unsigned long CSRWAIT : 5;
02065         unsigned long : 3;
02066         unsigned long CSWWAIT : 5;
02067         unsigned long : 5;
02068         unsigned long CSPRWAIT : 3;
02069         unsigned long : 5;
02070         unsigned long CSPWWAIT : 3;
02071     #endif
02072     } BIT;
02073     } CS5WCR1;
02074     union {
02075         unsigned long LONG;
02076     struct {
02077
02078     #ifdef __RX_LITTLE_ENDIAN__
02079         unsigned long CSROFF : 3;
02080         unsigned long : 1;
02081         unsigned long CSWOFF : 3;
02082         unsigned long : 1;
02083         unsigned long WDOFF : 3;
02084         unsigned long : 1;
02085         unsigned long AWAIT : 2;
02086         unsigned long : 2;
02087         unsigned long RDON : 3;
02088         unsigned long : 1;
02089         unsigned long WRON : 3;
02090         unsigned long : 1;
02091         unsigned long WDON : 3;
02092         unsigned long : 1;
02093         unsigned long CSON : 3;
02094         unsigned long : 1;
02095     #else
02096         unsigned long : 1;
02097         unsigned long CSON : 3;
02098         unsigned long : 1;
02099         unsigned long WDON : 3;
02100         unsigned long : 1;
02101         unsigned long WRON : 3;
02102         unsigned long : 1;
02103         unsigned long RDON : 3;
02104         unsigned long : 2;
02105         unsigned long AWAIT : 2;
02106         unsigned long : 1;
02107         unsigned long WDOFF : 3;
02108         unsigned long : 1;
02109         unsigned long CSWOFF : 3;
02110         unsigned long : 1;
02111         unsigned long CSROFF : 3;
02112     #endif
02113     } BIT;
02114     } CS5WCR2;
02115     char          wk10[6];
02116     union {
02117         unsigned short WORD;
02118     struct {
02119
02120     #ifdef __RX_LITTLE_ENDIAN__
02121         unsigned short WRMOD : 1;
02122         unsigned short : 2;
02123         unsigned short EWENB : 1;
02124         unsigned short : 4;
02125         unsigned short PRENB : 1;
02126         unsigned short PWENB : 1;
02127         unsigned short : 5;
02128         unsigned short PRMOD : 1;
02129     #else
02130         unsigned short PRMOD : 1;
02131         unsigned short : 5;
02132         unsigned short PWENB : 1;
02133         unsigned short PRENB : 1;
02134         unsigned short : 4;
02135         unsigned short EWENB : 1;
02136         unsigned short : 2;
02137         unsigned short WRMOD : 1;
02138     #endif
02139     } BIT;
02140     } CS6MOD;
02141     union {
02142         unsigned long LONG;
02143     struct {
02144
02145     #ifdef __RX_LITTLE_ENDIAN__
02146         unsigned long CSPWWAIT : 3;
02147         unsigned long : 5;
02148         unsigned long CSPRWAIT : 3;
02149         unsigned long : 5;

```

```

02150         unsigned long CSWWAIT : 5;
02151         unsigned long  : 3;
02152         unsigned long CSRWAIT : 5;
02153         unsigned long  : 3;
02154 #else
02155         unsigned long  : 3;
02156         unsigned long CSRWAIT : 5;
02157         unsigned long  : 3;
02158         unsigned long CSWWAIT : 5;
02159         unsigned long  : 5;
02160         unsigned long CSPRWAIT : 3;
02161         unsigned long  : 5;
02162         unsigned long CSPWWAIT : 3;
02163 #endif
02164     } BIT;
02165     } CS6WCR1;
02166     union {
02167         unsigned long LONG;
02168     struct {
02169
02170 #ifdef __RX_LITTLE_ENDIAN__
02171         unsigned long CSROFF : 3;
02172         unsigned long  : 1;
02173         unsigned long CSWOFF : 3;
02174         unsigned long  : 1;
02175         unsigned long WDOFF : 3;
02176         unsigned long  : 1;
02177         unsigned long AWAIT : 2;
02178         unsigned long  : 2;
02179         unsigned long RDON : 3;
02180         unsigned long  : 1;
02181         unsigned long WRON : 3;
02182         unsigned long  : 1;
02183         unsigned long WDON : 3;
02184         unsigned long  : 1;
02185         unsigned long CSON : 3;
02186         unsigned long  : 1;
02187 #else
02188         unsigned long  : 1;
02189         unsigned long CSON : 3;
02190         unsigned long  : 1;
02191         unsigned long WDON : 3;
02192         unsigned long  : 1;
02193         unsigned long WRON : 3;
02194         unsigned long  : 1;
02195         unsigned long RDON : 3;
02196         unsigned long  : 2;
02197         unsigned long AWAIT : 2;
02198         unsigned long  : 1;
02199         unsigned long WDOFF : 3;
02200         unsigned long  : 1;
02201         unsigned long CSWOFF : 3;
02202         unsigned long  : 1;
02203         unsigned long CSROFF : 3;
02204 #endif
02205     } BIT;
02206     } CS6WCR2;
02207     char        wk11[6];
02208     union {
02209         unsigned short WORD;
02210     struct {
02211
02212 #ifdef __RX_LITTLE_ENDIAN__
02213         unsigned short WRMOD : 1;
02214         unsigned short  : 2;
02215         unsigned short EWENB : 1;
02216         unsigned short  : 4;
02217         unsigned short PRENB : 1;
02218         unsigned short PWENB : 1;
02219         unsigned short  : 5;
02220         unsigned short PRMOD : 1;
02221 #else
02222         unsigned short PRMOD : 1;
02223         unsigned short  : 5;
02224         unsigned short PWENB : 1;
02225         unsigned short PRENB : 1;
02226         unsigned short  : 4;
02227         unsigned short EWENB : 1;
02228         unsigned short  : 2;
02229         unsigned short WRMOD : 1;
02230 #endif
02231     } BIT;
02232     } CS7MOD;
02233     union {
02234         unsigned long LONG;
02235     struct {
02236

```

```

02237 #ifdef __RX_LITTLE_ENDIAN__
02238     unsigned long CSPWWAIT : 3;
02239     unsigned long : 5;
02240     unsigned long CSPRWAIT : 3;
02241     unsigned long : 5;
02242     unsigned long CSWWAIT : 5;
02243     unsigned long : 3;
02244     unsigned long CSRWAIT : 5;
02245     unsigned long : 3;
02246 #else
02247     unsigned long : 3;
02248     unsigned long CSRWAIT : 5;
02249     unsigned long : 3;
02250     unsigned long CSWWAIT : 5;
02251     unsigned long : 5;
02252     unsigned long CSPRWAIT : 3;
02253     unsigned long : 5;
02254     unsigned long CSPWWAIT : 3;
02255 #endif
02256 } BIT;
02257 } CS7WCR1;
02258 union {
02259     unsigned long LONG;
02260     struct {
02261
02262 #ifdef __RX_LITTLE_ENDIAN__
02263     unsigned long CSROFF : 3;
02264     unsigned long : 1;
02265     unsigned long CSWOFF : 3;
02266     unsigned long : 1;
02267     unsigned long WDOFF : 3;
02268     unsigned long : 1;
02269     unsigned long AWAIT : 2;
02270     unsigned long : 2;
02271     unsigned long RDON : 3;
02272     unsigned long : 1;
02273     unsigned long WRON : 3;
02274     unsigned long : 1;
02275     unsigned long WDON : 3;
02276     unsigned long : 1;
02277     unsigned long CSON : 3;
02278     unsigned long : 1;
02279 #else
02280     unsigned long : 1;
02281     unsigned long CSON : 3;
02282     unsigned long : 1;
02283     unsigned long WDON : 3;
02284     unsigned long : 1;
02285     unsigned long WRON : 3;
02286     unsigned long : 1;
02287     unsigned long RDON : 3;
02288     unsigned long : 2;
02289     unsigned long AWAIT : 2;
02290     unsigned long : 1;
02291     unsigned long WDOFF : 3;
02292     unsigned long : 1;
02293     unsigned long CSWOFF : 3;
02294     unsigned long : 1;
02295     unsigned long CSROFF : 3;
02296 #endif
02297     } BIT;
02298     } CS7WCR2;
02299     char wk12[1926];
02300     union {
02301         unsigned short WORD;
02302         struct {
02303
02304 #ifdef __RX_LITTLE_ENDIAN__
02305     unsigned short EXENB : 1;
02306     unsigned short : 3;
02307     unsigned short BSIZE : 2;
02308     unsigned short : 2;
02309     unsigned short EMODE : 1;
02310     unsigned short : 3;
02311     unsigned short MPXEN : 1;
02312     unsigned short : 3;
02313 #else
02314     unsigned short : 3;
02315     unsigned short MPXEN : 1;
02316     unsigned short : 3;
02317     unsigned short EMODE : 1;
02318     unsigned short : 2;
02319     unsigned short BSIZE : 2;
02320     unsigned short : 3;
02321     unsigned short EXENB : 1;
02322 #endif
02323     } BIT;

```

```

02324     } CS0CR;
02325     char          wk13[6];
02326     union {
02327         unsigned short WORD;
02328         struct {
02329
02330 #ifdef __RX_LITTLE_ENDIAN__
02331         unsigned short RRCV : 4;
02332         unsigned short : 4;
02333         unsigned short WRCV : 4;
02334         unsigned short : 4;
02335 #else
02336         unsigned short : 4;
02337         unsigned short WRCV : 4;
02338         unsigned short : 4;
02339         unsigned short RRCV : 4;
02340 #endif
02341     } BIT;
02342     } CS0REC;
02343     char          wk14[6];
02344     union {
02345         unsigned short WORD;
02346         struct {
02347
02348 #ifdef __RX_LITTLE_ENDIAN__
02349         unsigned short EXENB : 1;
02350         unsigned short : 3;
02351         unsigned short BSIZE : 2;
02352         unsigned short : 2;
02353         unsigned short EMODE : 1;
02354         unsigned short : 3;
02355         unsigned short MPXEN : 1;
02356         unsigned short : 3;
02357 #else
02358         unsigned short : 3;
02359         unsigned short MPXEN : 1;
02360         unsigned short : 3;
02361         unsigned short EMODE : 1;
02362         unsigned short : 2;
02363         unsigned short BSIZE : 2;
02364         unsigned short : 3;
02365         unsigned short EXENB : 1;
02366 #endif
02367     } BIT;
02368     } CS1CR;
02369     char          wk15[6];
02370     union {
02371         unsigned short WORD;
02372         struct {
02373
02374 #ifdef __RX_LITTLE_ENDIAN__
02375         unsigned short RRCV : 4;
02376         unsigned short : 4;
02377         unsigned short WRCV : 4;
02378         unsigned short : 4;
02379 #else
02380         unsigned short : 4;
02381         unsigned short WRCV : 4;
02382         unsigned short : 4;
02383         unsigned short RRCV : 4;
02384 #endif
02385     } BIT;
02386     } CS1REC;
02387     char          wk16[6];
02388     union {
02389         unsigned short WORD;
02390         struct {
02391
02392 #ifdef __RX_LITTLE_ENDIAN__
02393         unsigned short EXENB : 1;
02394         unsigned short : 3;
02395         unsigned short BSIZE : 2;
02396         unsigned short : 2;
02397         unsigned short EMODE : 1;
02398         unsigned short : 3;
02399         unsigned short MPXEN : 1;
02400         unsigned short : 3;
02401 #else
02402         unsigned short : 3;
02403         unsigned short MPXEN : 1;
02404         unsigned short : 3;
02405         unsigned short EMODE : 1;
02406         unsigned short : 2;
02407         unsigned short BSIZE : 2;
02408         unsigned short : 3;
02409         unsigned short EXENB : 1;
02410 #endif

```

```

02411     } BIT;
02412     } CS2CR;
02413     char          wk17[6];
02414     union {
02415         unsigned short WORD;
02416         struct {
02417
02418 #ifdef __RX_LITTLE_ENDIAN__
02419         unsigned short RRCV : 4;
02420         unsigned short : 4;
02421         unsigned short WRCV : 4;
02422         unsigned short : 4;
02423 #else
02424         unsigned short : 4;
02425         unsigned short WRCV : 4;
02426         unsigned short : 4;
02427         unsigned short RRCV : 4;
02428 #endif
02429     } BIT;
02430     } CS2REC;
02431     char          wk18[6];
02432     union {
02433         unsigned short WORD;
02434         struct {
02435
02436 #ifdef __RX_LITTLE_ENDIAN__
02437         unsigned short EXENB : 1;
02438         unsigned short : 3;
02439         unsigned short BSIZE : 2;
02440         unsigned short : 2;
02441         unsigned short EMODE : 1;
02442         unsigned short : 3;
02443         unsigned short MPXEN : 1;
02444         unsigned short : 3;
02445 #else
02446         unsigned short : 3;
02447         unsigned short MPXEN : 1;
02448         unsigned short : 3;
02449         unsigned short EMODE : 1;
02450         unsigned short : 2;
02451         unsigned short BSIZE : 2;
02452         unsigned short : 3;
02453         unsigned short EXENB : 1;
02454 #endif
02455     } BIT;
02456     } CS3CR;
02457     char          wk19[6];
02458     union {
02459         unsigned short WORD;
02460         struct {
02461
02462 #ifdef __RX_LITTLE_ENDIAN__
02463         unsigned short RRCV : 4;
02464         unsigned short : 4;
02465         unsigned short WRCV : 4;
02466         unsigned short : 4;
02467 #else
02468         unsigned short : 4;
02469         unsigned short WRCV : 4;
02470         unsigned short : 4;
02471         unsigned short RRCV : 4;
02472 #endif
02473     } BIT;
02474     } CS3REC;
02475     char          wk20[6];
02476     union {
02477         unsigned short WORD;
02478         struct {
02479
02480 #ifdef __RX_LITTLE_ENDIAN__
02481         unsigned short EXENB : 1;
02482         unsigned short : 3;
02483         unsigned short BSIZE : 2;
02484         unsigned short : 2;
02485         unsigned short EMODE : 1;
02486         unsigned short : 3;
02487         unsigned short MPXEN : 1;
02488         unsigned short : 3;
02489 #else
02490         unsigned short : 3;
02491         unsigned short MPXEN : 1;
02492         unsigned short : 3;
02493         unsigned short EMODE : 1;
02494         unsigned short : 2;
02495         unsigned short BSIZE : 2;
02496         unsigned short : 3;
02497         unsigned short EXENB : 1;

```

```

02498 #endif
02499     } BIT;
02500     } CS4CR;
02501     char          wk21[6];
02502     union {
02503         unsigned short WORD;
02504         struct {
02505
02506 #ifdef __RX_LITTLE_ENDIAN__
02507             unsigned short RRCV : 4;
02508             unsigned short      : 4;
02509             unsigned short WRCV : 4;
02510             unsigned short      : 4;
02511 #else
02512             unsigned short      : 4;
02513             unsigned short WRCV : 4;
02514             unsigned short      : 4;
02515             unsigned short RRCV : 4;
02516 #endif
02517         } BIT;
02518     } CS4REC;
02519     char          wk22[6];
02520     union {
02521         unsigned short WORD;
02522         struct {
02523
02524 #ifdef __RX_LITTLE_ENDIAN__
02525             unsigned short EXENB : 1;
02526             unsigned short      : 3;
02527             unsigned short BSIZE : 2;
02528             unsigned short      : 2;
02529             unsigned short EMODE : 1;
02530             unsigned short      : 3;
02531             unsigned short MPXEN : 1;
02532             unsigned short      : 3;
02533 #else
02534             unsigned short      : 3;
02535             unsigned short MPXEN : 1;
02536             unsigned short      : 3;
02537             unsigned short EMODE : 1;
02538             unsigned short      : 2;
02539             unsigned short BSIZE : 2;
02540             unsigned short      : 3;
02541             unsigned short EXENB : 1;
02542 #endif
02543         } BIT;
02544     } CS5CR;
02545     char          wk23[6];
02546     union {
02547         unsigned short WORD;
02548         struct {
02549
02550 #ifdef __RX_LITTLE_ENDIAN__
02551             unsigned short RRCV : 4;
02552             unsigned short      : 4;
02553             unsigned short WRCV : 4;
02554             unsigned short      : 4;
02555 #else
02556             unsigned short      : 4;
02557             unsigned short WRCV : 4;
02558             unsigned short      : 4;
02559             unsigned short RRCV : 4;
02560 #endif
02561         } BIT;
02562     } CS5REC;
02563     char          wk24[6];
02564     union {
02565         unsigned short WORD;
02566         struct {
02567
02568 #ifdef __RX_LITTLE_ENDIAN__
02569             unsigned short EXENB : 1;
02570             unsigned short      : 3;
02571             unsigned short BSIZE : 2;
02572             unsigned short      : 2;
02573             unsigned short EMODE : 1;
02574             unsigned short      : 3;
02575             unsigned short MPXEN : 1;
02576             unsigned short      : 3;
02577 #else
02578             unsigned short      : 3;
02579             unsigned short MPXEN : 1;
02580             unsigned short      : 3;
02581             unsigned short EMODE : 1;
02582             unsigned short      : 2;
02583             unsigned short BSIZE : 2;
02584             unsigned short      : 3;

```

```

02585         unsigned short EXENB : 1;
02586 #endif
02587     } BIT;
02588     } CS6CR;
02589     char          wk25[6];
02590     union {
02591         unsigned short WORD;
02592         struct {
02593
02594 #ifdef __RX_LITTLE_ENDIAN__
02595             unsigned short RRCV : 4;
02596             unsigned short : 4;
02597             unsigned short WRCV : 4;
02598             unsigned short : 4;
02599 #else
02600             unsigned short : 4;
02601             unsigned short WRCV : 4;
02602             unsigned short : 4;
02603             unsigned short RRCV : 4;
02604 #endif
02605         } BIT;
02606     } CS6REC;
02607     char          wk26[6];
02608     union {
02609         unsigned short WORD;
02610         struct {
02611
02612 #ifdef __RX_LITTLE_ENDIAN__
02613             unsigned short EXENB : 1;
02614             unsigned short : 3;
02615             unsigned short BSIZE : 2;
02616             unsigned short : 2;
02617             unsigned short EMODE : 1;
02618             unsigned short : 3;
02619             unsigned short MPXEN : 1;
02620             unsigned short : 3;
02621 #else
02622             unsigned short : 3;
02623             unsigned short MPXEN : 1;
02624             unsigned short : 3;
02625             unsigned short EMODE : 1;
02626             unsigned short : 2;
02627             unsigned short BSIZE : 2;
02628             unsigned short : 3;
02629             unsigned short EXENB : 1;
02630 #endif
02631         } BIT;
02632     } CS7CR;
02633     char          wk27[6];
02634     union {
02635         unsigned short WORD;
02636         struct {
02637
02638 #ifdef __RX_LITTLE_ENDIAN__
02639             unsigned short RRCV : 4;
02640             unsigned short : 4;
02641             unsigned short WRCV : 4;
02642             unsigned short : 4;
02643 #else
02644             unsigned short : 4;
02645             unsigned short WRCV : 4;
02646             unsigned short : 4;
02647             unsigned short RRCV : 4;
02648 #endif
02649         } BIT;
02650     } CS7REC;
02651     char          wk28[4];
02652     union {
02653         unsigned short WORD;
02654         struct {
02655
02656 #ifdef __RX_LITTLE_ENDIAN__
02657             unsigned short RCVEN0 : 1;
02658             unsigned short RCVEN1 : 1;
02659             unsigned short RCVEN2 : 1;
02660             unsigned short RCVEN3 : 1;
02661             unsigned short RCVEN4 : 1;
02662             unsigned short RCVEN5 : 1;
02663             unsigned short RCVEN6 : 1;
02664             unsigned short RCVEN7 : 1;
02665             unsigned short RCVENM0 : 1;
02666             unsigned short RCVENM1 : 1;
02667             unsigned short RCVENM2 : 1;
02668             unsigned short RCVENM3 : 1;
02669             unsigned short RCVENM4 : 1;
02670             unsigned short RCVENM5 : 1;
02671             unsigned short RCVENM6 : 1;

```

```

02672 unsigned short RCVENM7 : 1;
02673 #else
02674 unsigned short RCVENM7 : 1;
02675 unsigned short RCVENM6 : 1;
02676 unsigned short RCVENM5 : 1;
02677 unsigned short RCVENM4 : 1;
02678 unsigned short RCVENM3 : 1;
02679 unsigned short RCVENM2 : 1;
02680 unsigned short RCVENM1 : 1;
02681 unsigned short RCVENM0 : 1;
02682 unsigned short RCVEN7 : 1;
02683 unsigned short RCVEN6 : 1;
02684 unsigned short RCVEN5 : 1;
02685 unsigned short RCVEN4 : 1;
02686 unsigned short RCVEN3 : 1;
02687 unsigned short RCVEN2 : 1;
02688 unsigned short RCVEN1 : 1;
02689 unsigned short RCVEN0 : 1;
02690 #endif
02691 } BIT;
02692 } CSRECEN;
02693 char wk29[894];
02694 union {
02695 unsigned char BYTE;
02696 struct {
02697
02698 #ifdef __RX_LITTLE_ENDIAN__
02699 unsigned char EXENB : 1;
02700 unsigned char : 3;
02701 unsigned char BSIZE : 2;
02702 unsigned char : 2;
02703 #else
02704 unsigned char : 2;
02705 unsigned char BSIZE : 2;
02706 unsigned char : 3;
02707 unsigned char EXENB : 1;
02708 #endif
02709 } BIT;
02710 } SDCCR;
02711 union {
02712 unsigned char BYTE;
02713 struct {
02714
02715 #ifdef __RX_LITTLE_ENDIAN__
02716 unsigned char EMODE : 1;
02717 unsigned char : 7;
02718 #else
02719 unsigned char : 7;
02720 unsigned char EMODE : 1;
02721 #endif
02722 } BIT;
02723 } SDCMOD;
02724 union {
02725 unsigned char BYTE;
02726 struct {
02727
02728 #ifdef __RX_LITTLE_ENDIAN__
02729 unsigned char BE : 1;
02730 unsigned char : 7;
02731 #else
02732 unsigned char : 7;
02733 unsigned char BE : 1;
02734 #endif
02735 } BIT;
02736 } SDAMOD;
02737 char wk30[13];
02738 union {
02739 unsigned char BYTE;
02740 struct {
02741
02742 #ifdef __RX_LITTLE_ENDIAN__
02743 unsigned char SFEN : 1;
02744 unsigned char : 7;
02745 #else
02746 unsigned char : 7;
02747 unsigned char SFEN : 1;
02748 #endif
02749 } BIT;
02750 } SDSELF;
02751 char wk31[3];
02752 union {
02753 unsigned short WORD;
02754 struct {
02755
02756 #ifdef __RX_LITTLE_ENDIAN__
02757 unsigned short RFC : 12;
02758 unsigned short REFW : 4;

```

```

02759 #else
02760     unsigned short REFW : 4;
02761     unsigned short RFC : 12;
02762 #endif
02763     } BIT;
02764     } SDRFCR;
02765     union {
02766         unsigned char BYTE;
02767         struct {
02768
02769 #ifdef __RX_LITTLE_ENDIAN__
02770         unsigned char RFEN : 1;
02771         unsigned char : 7;
02772 #else
02773         unsigned char : 7;
02774         unsigned char RFEN : 1;
02775 #endif
02776     } BIT;
02777     } SDRFEN;
02778     char          wk32[9];
02779     union {
02780         unsigned char BYTE;
02781         struct {
02782
02783 #ifdef __RX_LITTLE_ENDIAN__
02784         unsigned char INIRQ : 1;
02785         unsigned char : 7;
02786 #else
02787         unsigned char : 7;
02788         unsigned char INIRQ : 1;
02789 #endif
02790     } BIT;
02791     } SDICR;
02792     char          wk33[3];
02793     union {
02794         unsigned short WORD;
02795         struct {
02796
02797 #ifdef __RX_LITTLE_ENDIAN__
02798         unsigned short ARFI : 4;
02799         unsigned short ARFC : 4;
02800         unsigned short PRC : 3;
02801         unsigned short : 5;
02802 #else
02803         unsigned short : 5;
02804         unsigned short PRC : 3;
02805         unsigned short ARFC : 4;
02806         unsigned short ARFI : 4;
02807 #endif
02808     } BIT;
02809     } SDIR;
02810     char          wk34[26];
02811     union {
02812         unsigned char BYTE;
02813         struct {
02814
02815 #ifdef __RX_LITTLE_ENDIAN__
02816         unsigned char MXC : 2;
02817         unsigned char : 6;
02818 #else
02819         unsigned char : 6;
02820         unsigned char MXC : 2;
02821 #endif
02822     } BIT;
02823     } SDADR;
02824     char          wk35[3];
02825     union {
02826         unsigned long LONG;
02827         struct {
02828
02829 #ifdef __RX_LITTLE_ENDIAN__
02830         unsigned long CL : 3;
02831         unsigned long : 5;
02832         unsigned long WR : 1;
02833         unsigned long RP : 3;
02834         unsigned long RCD : 2;
02835         unsigned long : 2;
02836         unsigned long RAS : 3;
02837         unsigned long : 13;
02838 #else
02839         unsigned long : 13;
02840         unsigned long RAS : 3;
02841         unsigned long : 2;
02842         unsigned long RCD : 2;
02843         unsigned long RP : 3;
02844         unsigned long WR : 1;
02845         unsigned long : 5;

```

```

02846         unsigned long CL : 3;
02847 #endif
02848     } BIT;
02849     } SDTR;
02850     union {
02851         unsigned short WORD;
02852         struct {
02853
02854 #ifdef __RX_LITTLE_ENDIAN__
02855             unsigned short MR : 15;
02856             unsigned short : 1;
02857 #else
02858             unsigned short : 1;
02859             unsigned short MR : 15;
02860 #endif
02861         } BIT;
02862         } SDMOD;
02863         char          wk36[6];
02864         union {
02865             unsigned char BYTE;
02866             struct {
02867
02868 #ifdef __RX_LITTLE_ENDIAN__
02869             unsigned char MRSST : 1;
02870             unsigned char : 2;
02871             unsigned char INIST : 1;
02872             unsigned char SRFST : 1;
02873             unsigned char : 3;
02874 #else
02875             unsigned char : 3;
02876             unsigned char SRFST : 1;
02877             unsigned char INIST : 1;
02878             unsigned char : 2;
02879             unsigned char MRSST : 1;
02880 #endif
02881         } BIT;
02882         } SDSR;
02883         char          wk37[269231];
02884         union {
02885             unsigned long LONG;
02886             struct {
02887
02888 #ifdef __RX_LITTLE_ENDIAN__
02889             unsigned long PR1SEL : 3;
02890             unsigned long : 1;
02891             unsigned long PR2SEL : 3;
02892             unsigned long : 1;
02893             unsigned long PR3SEL : 3;
02894             unsigned long : 1;
02895             unsigned long PR4SEL : 3;
02896             unsigned long : 1;
02897             unsigned long PR5SEL : 3;
02898             unsigned long : 12;
02899             unsigned long PRERR : 1;
02900 #else
02901             unsigned long PRERR : 1;
02902             unsigned long : 12;
02903             unsigned long PR5SEL : 3;
02904             unsigned long : 1;
02905             unsigned long PR4SEL : 3;
02906             unsigned long : 1;
02907             unsigned long PR3SEL : 3;
02908             unsigned long : 1;
02909             unsigned long PR2SEL : 3;
02910             unsigned long : 1;
02911             unsigned long PR1SEL : 3;
02912 #endif
02913         } BIT;
02914         } EBMAPCR;
02915     } st_bsc_t;
02916
02917 typedef struct st_cac {
02918     union {
02919         unsigned char BYTE;
02920         struct {
02921
02922 #ifdef __RX_LITTLE_ENDIAN__
02923             unsigned char CFME : 1;
02924             unsigned char : 7;
02925 #else
02926             unsigned char : 7;
02927             unsigned char CFME : 1;
02928 #endif
02929         } BIT;
02930         } CACR0;
02931         union {
02932             unsigned char BYTE;

```

```

02933     struct {
02934
02935 #ifdef __RX_LITTLE_ENDIAN__
02936     unsigned char CACREFE : 1;
02937     unsigned char FMCS : 3;
02938     unsigned char TCSS : 2;
02939     unsigned char EDGES : 2;
02940 #else
02941     unsigned char EDGES : 2;
02942     unsigned char TCSS : 2;
02943     unsigned char FMCS : 3;
02944     unsigned char CACREFE : 1;
02945 #endif
02946     } BIT;
02947     } CACR1;
02948     union {
02949         unsigned char BYTE;
02950         struct {
02951
02952 #ifdef __RX_LITTLE_ENDIAN__
02953         unsigned char RPS : 1;
02954         unsigned char RSCS : 3;
02955         unsigned char RCDS : 2;
02956         unsigned char DFS : 2;
02957 #else
02958         unsigned char DFS : 2;
02959         unsigned char RCDS : 2;
02960         unsigned char RSCS : 3;
02961         unsigned char RPS : 1;
02962 #endif
02963         } BIT;
02964         } CACR2;
02965         union {
02966             unsigned char BYTE;
02967             struct {
02968
02969 #ifdef __RX_LITTLE_ENDIAN__
02970             unsigned char FERRIE : 1;
02971             unsigned char MENDIE : 1;
02972             unsigned char OVFFIE : 1;
02973             unsigned char : 1;
02974             unsigned char FERRFCL : 1;
02975             unsigned char MENDFCL : 1;
02976             unsigned char OVFFCL : 1;
02977             unsigned char : 1;
02978 #else
02979             unsigned char : 1;
02980             unsigned char OVFFCL : 1;
02981             unsigned char MENDFCL : 1;
02982             unsigned char FERRFCL : 1;
02983             unsigned char : 1;
02984             unsigned char OVFFIE : 1;
02985             unsigned char MENDIE : 1;
02986             unsigned char FERRIE : 1;
02987 #endif
02988             } BIT;
02989             } CAICR;
02990             union {
02991                 unsigned char BYTE;
02992                 struct {
02993
02994 #ifdef __RX_LITTLE_ENDIAN__
02995                 unsigned char FERRF : 1;
02996                 unsigned char MENDF : 1;
02997                 unsigned char OVFF : 1;
02998                 unsigned char : 5;
02999 #else
03000                 unsigned char : 5;
03001                 unsigned char OVFF : 1;
03002                 unsigned char MENDF : 1;
03003                 unsigned char FERRF : 1;
03004 #endif
03005                 } BIT;
03006                 } CASTR;
03007                 char        wk0[1];
03008                 unsigned short CAULVR;
03009                 unsigned short CALLVR;
03010                 unsigned short CACNTBR;
03011             } st_cac_t;
03012
03013 typedef struct st_can {
03014     struct {
03015         union {
03016             unsigned long LONG;
03017             struct {
03018                 unsigned short H;
03019                 unsigned short L;

```

```

03020     } WORD;
03021     struct {
03022         unsigned char HH;
03023         unsigned char HL;
03024         unsigned char LH;
03025         unsigned char LL;
03026     } BYTE;
03027     struct {
03028
03029 #ifdef __RX_LITTLE_ENDIAN__
03030         unsigned long EID : 18;
03031         unsigned long SID : 11;
03032         unsigned long : 1;
03033         unsigned long RTR : 1;
03034         unsigned long IDE : 1;
03035 #else
03036         unsigned long IDE : 1;
03037         unsigned long RTR : 1;
03038         unsigned long : 1;
03039         unsigned long SID : 11;
03040         unsigned long EID : 18;
03041 #endif
03042     } BIT;
03043     } ID;
03044     unsigned short DLC;
03045     unsigned char DATA[8];
03046     unsigned short TS;
03047     } MB[32];
03048     union {
03049         unsigned long LONG;
03050         struct {
03051             unsigned short H;
03052             unsigned short L;
03053         } WORD;
03054         struct {
03055             unsigned char HH;
03056             unsigned char HL;
03057             unsigned char LH;
03058             unsigned char LL;
03059         } BYTE;
03060     } struct {
03061
03062 #ifdef __RX_LITTLE_ENDIAN__
03063         unsigned long EID : 18;
03064         unsigned long SID : 11;
03065         unsigned long : 3;
03066 #else
03067         unsigned long : 3;
03068         unsigned long SID : 11;
03069         unsigned long EID : 18;
03070 #endif
03071     } BIT;
03072     } MKR[8];
03073     union {
03074         unsigned long LONG;
03075         struct {
03076             unsigned short H;
03077             unsigned short L;
03078         } WORD;
03079         struct {
03080             unsigned char HH;
03081             unsigned char HL;
03082             unsigned char LH;
03083             unsigned char LL;
03084         } BYTE;
03085     } struct {
03086
03087 #ifdef __RX_LITTLE_ENDIAN__
03088         unsigned long EID : 18;
03089         unsigned long SID : 11;
03090         unsigned long : 1;
03091         unsigned long RTR : 1;
03092         unsigned long IDE : 1;
03093 #else
03094         unsigned long IDE : 1;
03095         unsigned long RTR : 1;
03096         unsigned long : 1;
03097         unsigned long SID : 11;
03098         unsigned long EID : 18;
03099 #endif
03100     } BIT;
03101     } FIDCR0;
03102     union {
03103         unsigned long LONG;
03104         struct {
03105             unsigned short H;
03106             unsigned short L;

```

```

03107     } WORD;
03108     struct {
03109         unsigned char HH;
03110         unsigned char HL;
03111         unsigned char LH;
03112         unsigned char LL;
03113     } BYTE;
03114     struct {
03115
03116 #ifdef __RX_LITTLE_ENDIAN__
03117         unsigned long EID : 18;
03118         unsigned long SID : 11;
03119         unsigned long : 1;
03120         unsigned long RTR : 1;
03121         unsigned long IDE : 1;
03122 #else
03123         unsigned long IDE : 1;
03124         unsigned long RTR : 1;
03125         unsigned long : 1;
03126         unsigned long SID : 11;
03127         unsigned long EID : 18;
03128 #endif
03129     } BIT;
03130     } FIDCR1;
03131     union {
03132         unsigned long LONG;
03133         struct {
03134             unsigned short H;
03135             unsigned short L;
03136         } WORD;
03137         struct {
03138             unsigned char HH;
03139             unsigned char HL;
03140             unsigned char LH;
03141             unsigned char LL;
03142         } BYTE;
03143     } struct {
03144
03145 #ifdef __RX_LITTLE_ENDIAN__
03146         unsigned long MB0 : 1;
03147         unsigned long MB1 : 1;
03148         unsigned long MB2 : 1;
03149         unsigned long MB3 : 1;
03150         unsigned long MB4 : 1;
03151         unsigned long MB5 : 1;
03152         unsigned long MB6 : 1;
03153         unsigned long MB7 : 1;
03154         unsigned long MB8 : 1;
03155         unsigned long MB9 : 1;
03156         unsigned long MB10 : 1;
03157         unsigned long MB11 : 1;
03158         unsigned long MB12 : 1;
03159         unsigned long MB13 : 1;
03160         unsigned long MB14 : 1;
03161         unsigned long MB15 : 1;
03162         unsigned long MB16 : 1;
03163         unsigned long MB17 : 1;
03164         unsigned long MB18 : 1;
03165         unsigned long MB19 : 1;
03166         unsigned long MB20 : 1;
03167         unsigned long MB21 : 1;
03168         unsigned long MB22 : 1;
03169         unsigned long MB23 : 1;
03170         unsigned long MB24 : 1;
03171         unsigned long MB25 : 1;
03172         unsigned long MB26 : 1;
03173         unsigned long MB27 : 1;
03174         unsigned long MB28 : 1;
03175         unsigned long MB29 : 1;
03176         unsigned long MB30 : 1;
03177         unsigned long MB31 : 1;
03178 #else
03179         unsigned long MB31 : 1;
03180         unsigned long MB30 : 1;
03181         unsigned long MB29 : 1;
03182         unsigned long MB28 : 1;
03183         unsigned long MB27 : 1;
03184         unsigned long MB26 : 1;
03185         unsigned long MB25 : 1;
03186         unsigned long MB24 : 1;
03187         unsigned long MB23 : 1;
03188         unsigned long MB22 : 1;
03189         unsigned long MB21 : 1;
03190         unsigned long MB20 : 1;
03191         unsigned long MB19 : 1;
03192         unsigned long MB18 : 1;
03193         unsigned long MB17 : 1;

```

```

03194         unsigned long MB16 : 1;
03195         unsigned long MB15 : 1;
03196         unsigned long MB14 : 1;
03197         unsigned long MB13 : 1;
03198         unsigned long MB12 : 1;
03199         unsigned long MB11 : 1;
03200         unsigned long MB10 : 1;
03201         unsigned long MB9 : 1;
03202         unsigned long MB8 : 1;
03203         unsigned long MB7 : 1;
03204         unsigned long MB6 : 1;
03205         unsigned long MB5 : 1;
03206         unsigned long MB4 : 1;
03207         unsigned long MB3 : 1;
03208         unsigned long MB2 : 1;
03209         unsigned long MB1 : 1;
03210         unsigned long MB0 : 1;
03211     #endif
03212     } BIT;
03213     } MKIVLR;
03214     union {
03215         unsigned long LONG;
03216         struct {
03217             unsigned short H;
03218             unsigned short L;
03219         } WORD;
03220         struct {
03221             unsigned char HH;
03222             unsigned char HL;
03223             unsigned char LH;
03224             unsigned char LL;
03225         } BYTE;
03226         struct {
03227
03228     #ifdef __RX_LITTLE_ENDIAN__
03229         unsigned long MB0 : 1;
03230         unsigned long MB1 : 1;
03231         unsigned long MB2 : 1;
03232         unsigned long MB3 : 1;
03233         unsigned long MB4 : 1;
03234         unsigned long MB5 : 1;
03235         unsigned long MB6 : 1;
03236         unsigned long MB7 : 1;
03237         unsigned long MB8 : 1;
03238         unsigned long MB9 : 1;
03239         unsigned long MB10 : 1;
03240         unsigned long MB11 : 1;
03241         unsigned long MB12 : 1;
03242         unsigned long MB13 : 1;
03243         unsigned long MB14 : 1;
03244         unsigned long MB15 : 1;
03245         unsigned long MB16 : 1;
03246         unsigned long MB17 : 1;
03247         unsigned long MB18 : 1;
03248         unsigned long MB19 : 1;
03249         unsigned long MB20 : 1;
03250         unsigned long MB21 : 1;
03251         unsigned long MB22 : 1;
03252         unsigned long MB23 : 1;
03253         unsigned long MB24 : 1;
03254         unsigned long MB25 : 1;
03255         unsigned long MB26 : 1;
03256         unsigned long MB27 : 1;
03257         unsigned long MB28 : 1;
03258         unsigned long MB29 : 1;
03259         unsigned long MB30 : 1;
03260         unsigned long MB31 : 1;
03261     #else
03262         unsigned long MB31 : 1;
03263         unsigned long MB30 : 1;
03264         unsigned long MB29 : 1;
03265         unsigned long MB28 : 1;
03266         unsigned long MB27 : 1;
03267         unsigned long MB26 : 1;
03268         unsigned long MB25 : 1;
03269         unsigned long MB24 : 1;
03270         unsigned long MB23 : 1;
03271         unsigned long MB22 : 1;
03272         unsigned long MB21 : 1;
03273         unsigned long MB20 : 1;
03274         unsigned long MB19 : 1;
03275         unsigned long MB18 : 1;
03276         unsigned long MB17 : 1;
03277         unsigned long MB16 : 1;
03278         unsigned long MB15 : 1;
03279         unsigned long MB14 : 1;
03280         unsigned long MB13 : 1;

```

```

03281         unsigned long MB12 : 1;
03282         unsigned long MB11 : 1;
03283         unsigned long MB10 : 1;
03284         unsigned long MB9 : 1;
03285         unsigned long MB8 : 1;
03286         unsigned long MB7 : 1;
03287         unsigned long MB6 : 1;
03288         unsigned long MB5 : 1;
03289         unsigned long MB4 : 1;
03290         unsigned long MB3 : 1;
03291         unsigned long MB2 : 1;
03292         unsigned long MB1 : 1;
03293         unsigned long MB0 : 1;
03294     #endif
03295     } BIT;
03296     } MIER;
03297     char          wk0[1008];
03298     union {
03299         unsigned char BYTE;
03300         union {
03301             struct {
03302
03303     #ifdef __RX_LITTLE_ENDIAN__
03304         unsigned char SENTDATA : 1;
03305         unsigned char TRMACTIVE : 1;
03306         unsigned char TRMABT : 1;
03307         unsigned char      : 1;
03308         unsigned char ONESHOT : 1;
03309         unsigned char      : 1;
03310         unsigned char RECREQ : 1;
03311         unsigned char TRMREQ : 1;
03312     #else
03313         unsigned char TRMREQ : 1;
03314         unsigned char RECREQ : 1;
03315         unsigned char      : 1;
03316         unsigned char ONESHOT : 1;
03317         unsigned char      : 1;
03318         unsigned char TRMABT : 1;
03319         unsigned char TRMACTIVE : 1;
03320         unsigned char SENTDATA : 1;
03321     #endif
03322         } TX;
03323         struct {
03324
03325     #ifdef __RX_LITTLE_ENDIAN__
03326         unsigned char NEWDATA : 1;
03327         unsigned char INVALIDDATA : 1;
03328         unsigned char MSGLOST : 1;
03329         unsigned char      : 1;
03330         unsigned char ONESHOT : 1;
03331         unsigned char      : 1;
03332         unsigned char RECREQ : 1;
03333         unsigned char TRMREQ : 1;
03334     #else
03335         unsigned char TRMREQ : 1;
03336         unsigned char RECREQ : 1;
03337         unsigned char      : 1;
03338         unsigned char ONESHOT : 1;
03339         unsigned char      : 1;
03340         unsigned char MSGLOST : 1;
03341         unsigned char INVALIDDATA : 1;
03342         unsigned char NEWDATA : 1;
03343     #endif
03344         } RX;
03345         } BIT;
03346     } MCTL[32];
03347     union {
03348         unsigned short WORD;
03349         struct {
03350             unsigned char H;
03351             unsigned char L;
03352         } BYTE;
03353         struct {
03354
03355     #ifdef __RX_LITTLE_ENDIAN__
03356         unsigned short MBM : 1;
03357         unsigned short IDFM : 2;
03358         unsigned short MLM : 1;
03359         unsigned short TPM : 1;
03360         unsigned short TSRC : 1;
03361         unsigned short TSPS : 2;
03362         unsigned short CANM : 2;
03363         unsigned short SLPM : 1;
03364         unsigned short BOM : 2;
03365         unsigned short RBOC : 1;
03366         unsigned short      : 2;
03367     #else

```

```

03368         unsigned short : 2;
03369         unsigned short RBOC : 1;
03370         unsigned short BOM : 2;
03371         unsigned short SLPM : 1;
03372         unsigned short CANM : 2;
03373         unsigned short TSPS : 2;
03374         unsigned short TSRC : 1;
03375         unsigned short TPM : 1;
03376         unsigned short MLM : 1;
03377         unsigned short IDFM : 2;
03378         unsigned short MBM : 1;
03379 #endif
03380     } BIT;
03381     } CTLR;
03382     union {
03383         unsigned short WORD;
03384         struct {
03385             unsigned char H;
03386             unsigned char L;
03387         } BYTE;
03388         struct {
03389
03390 #ifdef __RX_LITTLE_ENDIAN__
03391             unsigned short NDST : 1;
03392             unsigned short SDST : 1;
03393             unsigned short RFST : 1;
03394             unsigned short TFST : 1;
03395             unsigned short NMLST : 1;
03396             unsigned short FMLST : 1;
03397             unsigned short TABST : 1;
03398             unsigned short EST : 1;
03399             unsigned short RSTST : 1;
03400             unsigned short HLTST : 1;
03401             unsigned short SLPST : 1;
03402             unsigned short EPST : 1;
03403             unsigned short BOST : 1;
03404             unsigned short TRMST : 1;
03405             unsigned short RECST : 1;
03406             unsigned short : 1;
03407 #else
03408             unsigned short : 1;
03409             unsigned short RECST : 1;
03410             unsigned short TRMST : 1;
03411             unsigned short BOST : 1;
03412             unsigned short EPST : 1;
03413             unsigned short SLPST : 1;
03414             unsigned short HLTST : 1;
03415             unsigned short RSTST : 1;
03416             unsigned short EST : 1;
03417             unsigned short TABST : 1;
03418             unsigned short FMLST : 1;
03419             unsigned short NMLST : 1;
03420             unsigned short TFST : 1;
03421             unsigned short RFST : 1;
03422             unsigned short SDST : 1;
03423             unsigned short NDST : 1;
03424 #endif
03425         } BIT;
03426         } STR;
03427         union {
03428             unsigned long LONG;
03429             struct {
03430                 unsigned short H;
03431                 unsigned short L;
03432             } WORD;
03433             struct {
03434                 unsigned char HH;
03435                 unsigned char HL;
03436                 unsigned char LH;
03437                 unsigned char LL;
03438             } BYTE;
03439             struct {
03440
03441 #ifdef __RX_LITTLE_ENDIAN__
03442                 unsigned long CCLKS : 1;
03443                 unsigned long : 7;
03444                 unsigned long TSEG2 : 3;
03445                 unsigned long : 1;
03446                 unsigned long SJW : 2;
03447                 unsigned long : 2;
03448                 unsigned long BRP : 10;
03449                 unsigned long : 2;
03450                 unsigned long TSEG1 : 4;
03451 #else
03452                 unsigned long TSEG1 : 4;
03453                 unsigned long : 2;
03454                 unsigned long BRP : 10;

```

```

03455         unsigned long : 2;
03456         unsigned long SJW : 2;
03457         unsigned long : 1;
03458         unsigned long TSEG2 : 3;
03459         unsigned long : 7;
03460         unsigned long CCLKS : 1;
03461     #endif
03462     } BIT;
03463     } BCR;
03464     union {
03465         unsigned char BYTE;
03466         struct {
03467
03468     #ifdef __RX_LITTLE_ENDIAN__
03469         unsigned char RFE : 1;
03470         unsigned char RFUST : 3;
03471         unsigned char RFMLF : 1;
03472         unsigned char RFFST : 1;
03473         unsigned char RFWST : 1;
03474         unsigned char RFEST : 1;
03475     #else
03476         unsigned char RFEST : 1;
03477         unsigned char RFWST : 1;
03478         unsigned char RFFST : 1;
03479         unsigned char RFMLF : 1;
03480         unsigned char RFUST : 3;
03481         unsigned char RFE : 1;
03482     #endif
03483     } BIT;
03484     } RFCR;
03485     unsigned char RFPCR;
03486     union {
03487         unsigned char BYTE;
03488         struct {
03489
03490     #ifdef __RX_LITTLE_ENDIAN__
03491         unsigned char TFE : 1;
03492         unsigned char TFUST : 3;
03493         unsigned char : 2;
03494         unsigned char TFFST : 1;
03495         unsigned char TFEST : 1;
03496     #else
03497         unsigned char TFEST : 1;
03498         unsigned char TFFST : 1;
03499         unsigned char : 2;
03500         unsigned char TFUST : 3;
03501         unsigned char TFE : 1;
03502     #endif
03503     } BIT;
03504     } TFCR;
03505     unsigned char TFPCR;
03506     union {
03507         unsigned char BYTE;
03508         struct {
03509
03510     #ifdef __RX_LITTLE_ENDIAN__
03511         unsigned char BEIE : 1;
03512         unsigned char EWIE : 1;
03513         unsigned char EPIE : 1;
03514         unsigned char BOEIE : 1;
03515         unsigned char BORIE : 1;
03516         unsigned char ORIE : 1;
03517         unsigned char OLIE : 1;
03518         unsigned char BLIE : 1;
03519     #else
03520         unsigned char BLIE : 1;
03521         unsigned char OLIE : 1;
03522         unsigned char ORIE : 1;
03523         unsigned char BORIE : 1;
03524         unsigned char BOEIE : 1;
03525         unsigned char EPIE : 1;
03526         unsigned char EWIE : 1;
03527         unsigned char BEIE : 1;
03528     #endif
03529     } BIT;
03530     } EIER;
03531     union {
03532         unsigned char BYTE;
03533         struct {
03534
03535     #ifdef __RX_LITTLE_ENDIAN__
03536         unsigned char BEIF : 1;
03537         unsigned char EWIF : 1;
03538         unsigned char EPIF : 1;
03539         unsigned char BOEIF : 1;
03540         unsigned char BORIF : 1;
03541         unsigned char ORIF : 1;

```

```
03542         unsigned char OLIF : 1;
03543         unsigned char BLIF : 1;
03544 #else
03545         unsigned char BLIF : 1;
03546         unsigned char OLIF : 1;
03547         unsigned char ORIF : 1;
03548         unsigned char BORIF : 1;
03549         unsigned char BOEIF : 1;
03550         unsigned char EPIF : 1;
03551         unsigned char EWIF : 1;
03552         unsigned char BEIF : 1;
03553 #endif
03554     } BIT;
03555     } EIFR;
03556     unsigned char RECR;
03557     unsigned char TECR;
03558     union {
03559         unsigned char BYTE;
03560         struct {
03561
03562 #ifdef __RX_LITTLE_ENDIAN__
03563         unsigned char SEF : 1;
03564         unsigned char FEF : 1;
03565         unsigned char AEF : 1;
03566         unsigned char CEF : 1;
03567         unsigned char BE1F : 1;
03568         unsigned char BE0F : 1;
03569         unsigned char ADEF : 1;
03570         unsigned char EDPM : 1;
03571 #else
03572         unsigned char EDPM : 1;
03573         unsigned char ADEF : 1;
03574         unsigned char BE0F : 1;
03575         unsigned char BE1F : 1;
03576         unsigned char CEF : 1;
03577         unsigned char AEF : 1;
03578         unsigned char FEF : 1;
03579         unsigned char SEF : 1;
03580 #endif
03581     } BIT;
03582     } ECSR;
03583     unsigned char CSSR;
03584     union {
03585         unsigned char BYTE;
03586         struct {
03587
03588 #ifdef __RX_LITTLE_ENDIAN__
03589         unsigned char MBNST : 5;
03590         unsigned char : 2;
03591         unsigned char SEST : 1;
03592 #else
03593         unsigned char SEST : 1;
03594         unsigned char : 2;
03595         unsigned char MBNST : 5;
03596 #endif
03597     } BIT;
03598     } MSSR;
03599     union {
03600         unsigned char BYTE;
03601         struct {
03602
03603 #ifdef __RX_LITTLE_ENDIAN__
03604         unsigned char MBSM : 2;
03605         unsigned char : 6;
03606 #else
03607         unsigned char : 6;
03608         unsigned char MBSM : 2;
03609 #endif
03610     } BIT;
03611     } MSMR;
03612     unsigned short TSR;
03613     unsigned short AFSR;
03614     union {
03615         unsigned char BYTE;
03616         struct {
03617
03618 #ifdef __RX_LITTLE_ENDIAN__
03619         unsigned char TSTE : 1;
03620         unsigned char TSTM : 2;
03621         unsigned char : 5;
03622 #else
03623         unsigned char : 5;
03624         unsigned char TSTM : 2;
03625         unsigned char TSTE : 1;
03626 #endif
03627     } BIT;
03628     } TCR;
```

```

03629 } st_can_t;
03630
03631 typedef struct st_cmt {
03632     union {
03633         unsigned short WORD;
03634         struct {
03635
03636 #ifdef __RX_LITTLE_ENDIAN__
03637         unsigned short STR0 : 1;
03638         unsigned short STR1 : 1;
03639         unsigned short : 14;
03640 #else
03641         unsigned short : 14;
03642         unsigned short STR1 : 1;
03643         unsigned short STR0 : 1;
03644 #endif
03645         } BIT;
03646         } CMSTR0;
03647         char          wk0[14];
03648         union {
03649             unsigned short WORD;
03650             struct {
03651
03652 #ifdef __RX_LITTLE_ENDIAN__
03653             unsigned short STR2 : 1;
03654             unsigned short STR3 : 1;
03655             unsigned short : 14;
03656 #else
03657             unsigned short : 14;
03658             unsigned short STR3 : 1;
03659             unsigned short STR2 : 1;
03660 #endif
03661             } BIT;
03662             } CMSTR1;
03663     } st_cmt_t;
03664
03665 typedef struct st_cmt0 {
03666     union {
03667         unsigned short WORD;
03668         struct {
03669
03670 #ifdef __RX_LITTLE_ENDIAN__
03671         unsigned short CKS : 2;
03672         unsigned short : 4;
03673         unsigned short CMIE : 1;
03674         unsigned short : 9;
03675 #else
03676         unsigned short : 9;
03677         unsigned short CMIE : 1;
03678         unsigned short : 4;
03679         unsigned short CKS : 2;
03680 #endif
03681         } BIT;
03682         } CMCR;
03683         unsigned short CMCNT;
03684         unsigned short CMCOR;
03685     } st_cmt0_t;
03686
03687 typedef struct st_cmtw {
03688     union {
03689         unsigned short WORD;
03690         struct {
03691
03692 #ifdef __RX_LITTLE_ENDIAN__
03693         unsigned short STR : 1;
03694         unsigned short : 15;
03695 #else
03696         unsigned short : 15;
03697         unsigned short STR : 1;
03698 #endif
03699         } BIT;
03700         } CMWSTR;
03701         char          wk0[2];
03702         union {
03703             unsigned short WORD;
03704             struct {
03705
03706 #ifdef __RX_LITTLE_ENDIAN__
03707             unsigned short CKS : 2;
03708             unsigned short : 1;
03709             unsigned short CMWIE : 1;
03710             unsigned short IC0IE : 1;
03711             unsigned short IC1IE : 1;
03712             unsigned short OC0IE : 1;
03713             unsigned short OC1IE : 1;
03714             unsigned short : 1;
03715             unsigned short CMS : 1;

```

```

03716         unsigned short : 3;
03717         unsigned short CCLR : 3;
03718 #else
03719         unsigned short CCLR : 3;
03720         unsigned short : 3;
03721         unsigned short CMS : 1;
03722         unsigned short : 1;
03723         unsigned short OC1IE : 1;
03724         unsigned short OC0IE : 1;
03725         unsigned short IC1IE : 1;
03726         unsigned short IC0IE : 1;
03727         unsigned short CMWIE : 1;
03728         unsigned short : 1;
03729         unsigned short CKS : 2;
03730 #endif
03731     } BIT;
03732     } CMWCR;
03733     char        wk1[2];
03734     union {
03735         unsigned short WORD;
03736         struct {
03737
03738 #ifdef __RX_LITTLE_ENDIAN__
03739             unsigned short IC0 : 2;
03740             unsigned short IC1 : 2;
03741             unsigned short IC0E : 1;
03742             unsigned short IC1E : 1;
03743             unsigned short : 2;
03744             unsigned short OC0 : 2;
03745             unsigned short OC1 : 2;
03746             unsigned short OC0E : 1;
03747             unsigned short OC1E : 1;
03748             unsigned short : 1;
03749             unsigned short CMWE : 1;
03750 #else
03751             unsigned short CMWE : 1;
03752             unsigned short : 1;
03753             unsigned short OC1E : 1;
03754             unsigned short OC0E : 1;
03755             unsigned short OC1 : 2;
03756             unsigned short OC0 : 2;
03757             unsigned short : 2;
03758             unsigned short IC1E : 1;
03759             unsigned short IC0E : 1;
03760             unsigned short IC1 : 2;
03761             unsigned short IC0 : 2;
03762 #endif
03763         } BIT;
03764     } CMWIOR;
03765     char        wk2[6];
03766     unsigned long CMWCNT;
03767     unsigned long CMWCOR;
03768     unsigned long CMWICR0;
03769     unsigned long CMWICR1;
03770     unsigned long CMWOCR0;
03771     unsigned long CMWOCR1;
03772 } st_cmtw_t;
03773
03774 typedef struct st_crc {
03775     union {
03776         unsigned char BYTE;
03777         struct {
03778
03779 #ifdef __RX_LITTLE_ENDIAN__
03780             unsigned char GPS : 3;
03781             unsigned char : 3;
03782             unsigned char LMS : 1;
03783             unsigned char DORCLR : 1;
03784 #else
03785             unsigned char DORCLR : 1;
03786             unsigned char LMS : 1;
03787             unsigned char : 3;
03788             unsigned char GPS : 3;
03789 #endif
03790         } BIT;
03791     } CRCCR;
03792     char        wk0[3];
03793     union {
03794         unsigned long LONG;
03795         unsigned char BYTE;
03796     } CRCDIR;
03797     union {
03798         unsigned long LONG;
03799         unsigned short WORD;
03800         unsigned char BYTE;
03801     } CRCDOR;
03802 } st_crc_t;

```

```

03803
03804 typedef struct st_da {
03805     unsigned short DADR0;
03806     unsigned short DADR1;
03807     union {
03808         unsigned char BYTE;
03809         struct {
03810
03811 #ifdef __RX_LITTLE_ENDIAN__
03812         unsigned char : 5;
03813         unsigned char DAE : 1;
03814         unsigned char DAOE0 : 1;
03815         unsigned char DAOE1 : 1;
03816 #else
03817         unsigned char DAOE1 : 1;
03818         unsigned char DAOE0 : 1;
03819         unsigned char DAE : 1;
03820         unsigned char : 5;
03821 #endif
03822     } BIT;
03823     } DACR;
03824     union {
03825         unsigned char BYTE;
03826         struct {
03827
03828 #ifdef __RX_LITTLE_ENDIAN__
03829         unsigned char : 7;
03830         unsigned char DPSEL : 1;
03831 #else
03832         unsigned char DPSEL : 1;
03833         unsigned char : 7;
03834 #endif
03835     } BIT;
03836     } DADPR;
03837     union {
03838         unsigned char BYTE;
03839         struct {
03840
03841 #ifdef __RX_LITTLE_ENDIAN__
03842         unsigned char : 7;
03843         unsigned char DAADST : 1;
03844 #else
03845         unsigned char DAADST : 1;
03846         unsigned char : 7;
03847 #endif
03848     } BIT;
03849     } DAADSCR;
03850     char wk0[1];
03851     union {
03852         unsigned char BYTE;
03853         struct {
03854
03855 #ifdef __RX_LITTLE_ENDIAN__
03856         unsigned char : 6;
03857         unsigned char DAAMP0 : 1;
03858         unsigned char DAAMP1 : 1;
03859 #else
03860         unsigned char DAAMP1 : 1;
03861         unsigned char DAAMP0 : 1;
03862         unsigned char : 6;
03863 #endif
03864     } BIT;
03865     } DAAMPCR;
03866     char wk1[19];
03867     union {
03868         unsigned char BYTE;
03869         struct {
03870
03871 #ifdef __RX_LITTLE_ENDIAN__
03872         unsigned char : 6;
03873         unsigned char DAASW0 : 1;
03874         unsigned char DAASW1 : 1;
03875 #else
03876         unsigned char DAASW1 : 1;
03877         unsigned char DAASW0 : 1;
03878         unsigned char : 6;
03879 #endif
03880     } BIT;
03881     } DAASWCR;
03882     char wk2[17763];
03883     union {
03884         unsigned char BYTE;
03885         struct {
03886
03887 #ifdef __RX_LITTLE_ENDIAN__
03888         unsigned char : 1;
03889         unsigned char AMADSEL1 : 1;

```

```

03890         unsigned char : 6;
03891 #else
03892         unsigned char : 6;
03893         unsigned char AMADSEL1 : 1;
03894         unsigned char : 1;
03895 #endif
03896     } BIT;
03897     } DAADUSR;
03898 } st_da_t;
03899
03900 typedef struct st_dmac {
03901     union {
03902         unsigned char BYTE;
03903     } struct {
03904
03905 #ifdef __RX_LITTLE_ENDIAN__
03906         unsigned char DMST : 1;
03907         unsigned char : 7;
03908 #else
03909         unsigned char : 7;
03910         unsigned char DMST : 1;
03911 #endif
03912     } BIT;
03913     } DMAST;
03914     char          wk0[3];
03915     union {
03916         unsigned char BYTE;
03917     } struct {
03918
03919 #ifdef __RX_LITTLE_ENDIAN__
03920         unsigned char : 4;
03921         unsigned char DMIS4 : 1;
03922         unsigned char DMIS5 : 1;
03923         unsigned char DMIS6 : 1;
03924         unsigned char DMIS7 : 1;
03925 #else
03926         unsigned char DMIS7 : 1;
03927         unsigned char DMIS6 : 1;
03928         unsigned char DMIS5 : 1;
03929         unsigned char DMIS4 : 1;
03930         unsigned char : 4;
03931 #endif
03932     } BIT;
03933     } DMIST;
03934 } st_dmac_t;
03935
03936 typedef struct st_dmac0 {
03937     void          *DMSAR;
03938     void          *DMDAR;
03939     unsigned long  DMCRA;
03940     unsigned short DMCRB;
03941     char          wk0[2];
03942     union {
03943         unsigned short WORD;
03944     } struct {
03945
03946 #ifdef __RX_LITTLE_ENDIAN__
03947         unsigned short DCTG : 2;
03948         unsigned short : 6;
03949         unsigned short SZ : 2;
03950         unsigned short : 2;
03951         unsigned short DTS : 2;
03952         unsigned short MD : 2;
03953 #else
03954         unsigned short MD : 2;
03955         unsigned short DTS : 2;
03956         unsigned short : 2;
03957         unsigned short SZ : 2;
03958         unsigned short : 6;
03959         unsigned short DCTG : 2;
03960 #endif
03961     } BIT;
03962     } DMTMD;
03963     char          wk1[1];
03964     union {
03965         unsigned char BYTE;
03966     } struct {
03967
03968 #ifdef __RX_LITTLE_ENDIAN__
03969         unsigned char DARIE : 1;
03970         unsigned char SARIE : 1;
03971         unsigned char RPTIE : 1;
03972         unsigned char ESIE : 1;
03973         unsigned char DTIE : 1;
03974         unsigned char : 3;
03975 #else
03976         unsigned char : 3;

```

```
03977         unsigned char DTIE : 1;
03978         unsigned char ESIE : 1;
03979         unsigned char RPTIE : 1;
03980         unsigned char SARIE : 1;
03981         unsigned char DARIE : 1;
03982 #endif
03983     } BIT;
03984     } DMINT;
03985     union {
03986         unsigned short WORD;
03987     struct {
03988
03989 #ifdef __RX_LITTLE_ENDIAN__
03990         unsigned short DARA : 5;
03991         unsigned short : 1;
03992         unsigned short DM : 2;
03993         unsigned short SARA : 5;
03994         unsigned short : 1;
03995         unsigned short SM : 2;
03996 #else
03997         unsigned short SM : 2;
03998         unsigned short : 1;
03999         unsigned short SARA : 5;
04000         unsigned short DM : 2;
04001         unsigned short : 1;
04002         unsigned short DARA : 5;
04003 #endif
04004     } BIT;
04005     } DMAMD;
04006     char      wk2[2];
04007     unsigned long  DMOFR;
04008     union {
04009         unsigned char BYTE;
04010     struct {
04011
04012 #ifdef __RX_LITTLE_ENDIAN__
04013         unsigned char DTE : 1;
04014         unsigned char : 7;
04015 #else
04016         unsigned char : 7;
04017         unsigned char DTE : 1;
04018 #endif
04019     } BIT;
04020     } DMCNT;
04021     union {
04022         unsigned char BYTE;
04023     struct {
04024
04025 #ifdef __RX_LITTLE_ENDIAN__
04026         unsigned char SWREQ : 1;
04027         unsigned char : 3;
04028         unsigned char CLRS : 1;
04029         unsigned char : 3;
04030 #else
04031         unsigned char : 3;
04032         unsigned char CLRS : 1;
04033         unsigned char : 3;
04034         unsigned char SWREQ : 1;
04035 #endif
04036     } BIT;
04037     } DMREQ;
04038     union {
04039         unsigned char BYTE;
04040     struct {
04041
04042 #ifdef __RX_LITTLE_ENDIAN__
04043         unsigned char ESIF : 1;
04044         unsigned char : 3;
04045         unsigned char DTIF : 1;
04046         unsigned char : 2;
04047         unsigned char ACT : 1;
04048 #else
04049         unsigned char ACT : 1;
04050         unsigned char : 2;
04051         unsigned char DTIF : 1;
04052         unsigned char : 3;
04053         unsigned char ESIF : 1;
04054 #endif
04055     } BIT;
04056     } DMSTS;
04057     union {
04058         unsigned char BYTE;
04059     struct {
04060
04061 #ifdef __RX_LITTLE_ENDIAN__
04062         unsigned char DISEL : 1;
04063         unsigned char : 7;
```

```

04064 #else
04065         unsigned char : 7;
04066         unsigned char DISEL : 1;
04067 #endif
04068     } BIT;
04069     } DMCSSL;
04070 } st_dmac0_t;
04071
04072 typedef struct st_dmac1 {
04073     void *DMSAR;
04074     void *DMDAR;
04075     unsigned long DMCRA;
04076     unsigned short DMCRB;
04077     char wk0[2];
04078     union {
04079         unsigned short WORD;
04080     } struct {
04081
04082 #ifdef __RX_LITTLE_ENDIAN__
04083         unsigned short DCTG : 2;
04084         unsigned short : 6;
04085         unsigned short SZ : 2;
04086         unsigned short : 2;
04087         unsigned short DTS : 2;
04088         unsigned short MD : 2;
04089 #else
04090         unsigned short MD : 2;
04091         unsigned short DTS : 2;
04092         unsigned short : 2;
04093         unsigned short SZ : 2;
04094         unsigned short : 6;
04095         unsigned short DCTG : 2;
04096 #endif
04097     } BIT;
04098     } DMTMD;
04099     char wk1[1];
04100     union {
04101         unsigned char BYTE;
04102     } struct {
04103
04104 #ifdef __RX_LITTLE_ENDIAN__
04105         unsigned char DARIE : 1;
04106         unsigned char SARIE : 1;
04107         unsigned char RPTIE : 1;
04108         unsigned char ESIE : 1;
04109         unsigned char DTIE : 1;
04110         unsigned char : 3;
04111 #else
04112         unsigned char : 3;
04113         unsigned char DTIE : 1;
04114         unsigned char ESIE : 1;
04115         unsigned char RPTIE : 1;
04116         unsigned char SARIE : 1;
04117         unsigned char DARIE : 1;
04118 #endif
04119     } BIT;
04120     } DMINT;
04121     union {
04122         unsigned short WORD;
04123     } struct {
04124
04125 #ifdef __RX_LITTLE_ENDIAN__
04126         unsigned short DARA : 5;
04127         unsigned short : 1;
04128         unsigned short DM : 2;
04129         unsigned short SARA : 5;
04130         unsigned short : 1;
04131         unsigned short SM : 2;
04132 #else
04133         unsigned short SM : 2;
04134         unsigned short : 1;
04135         unsigned short SARA : 5;
04136         unsigned short DM : 2;
04137         unsigned short : 1;
04138         unsigned short DARA : 5;
04139 #endif
04140     } BIT;
04141     } DMAMD;
04142     char wk2[6];
04143     union {
04144         unsigned char BYTE;
04145     } struct {
04146
04147 #ifdef __RX_LITTLE_ENDIAN__
04148         unsigned char DTE : 1;
04149         unsigned char : 7;
04150 #else

```

```
04151         unsigned char : 7;
04152         unsigned char DTE : 1;
04153 #endif
04154     } BIT;
04155     } DMCNT;
04156     union {
04157         unsigned char BYTE;
04158     struct {
04159
04160 #ifdef __RX_LITTLE_ENDIAN__
04161         unsigned char SWREQ : 1;
04162         unsigned char : 3;
04163         unsigned char CLRS : 1;
04164         unsigned char : 3;
04165 #else
04166         unsigned char : 3;
04167         unsigned char CLRS : 1;
04168         unsigned char : 3;
04169         unsigned char SWREQ : 1;
04170 #endif
04171     } BIT;
04172     } DMREQ;
04173     union {
04174         unsigned char BYTE;
04175     struct {
04176
04177 #ifdef __RX_LITTLE_ENDIAN__
04178         unsigned char ESIF : 1;
04179         unsigned char : 3;
04180         unsigned char DTIF : 1;
04181         unsigned char : 2;
04182         unsigned char ACT : 1;
04183 #else
04184         unsigned char ACT : 1;
04185         unsigned char : 2;
04186         unsigned char DTIF : 1;
04187         unsigned char : 3;
04188         unsigned char ESIF : 1;
04189 #endif
04190     } BIT;
04191     } DMSTS;
04192     union {
04193         unsigned char BYTE;
04194     struct {
04195
04196 #ifdef __RX_LITTLE_ENDIAN__
04197         unsigned char DISEL : 1;
04198         unsigned char : 7;
04199 #else
04200         unsigned char : 7;
04201         unsigned char DISEL : 1;
04202 #endif
04203     } BIT;
04204     } DMCSL;
04205 } st_dmac1_t;
04206
04207 typedef struct st_doc {
04208     union {
04209         unsigned char BYTE;
04210     struct {
04211
04212 #ifdef __RX_LITTLE_ENDIAN__
04213         unsigned char OMS : 2;
04214         unsigned char DCSEL : 1;
04215         unsigned char : 1;
04216         unsigned char DOPCIE : 1;
04217         unsigned char DOPCF : 1;
04218         unsigned char DOPCFCL : 1;
04219         unsigned char : 1;
04220 #else
04221         unsigned char : 1;
04222         unsigned char DOPCFCL : 1;
04223         unsigned char DOPCF : 1;
04224         unsigned char DOPCIE : 1;
04225         unsigned char : 1;
04226         unsigned char DCSEL : 1;
04227         unsigned char OMS : 2;
04228 #endif
04229     } BIT;
04230     } DOCR;
04231     char          wk0[1];
04232     unsigned short DODIR;
04233     unsigned short DODSR;
04234 } st_doc_t;
04235
04236 typedef struct st_drw2d {
04237     union {
```

```

04238     union {
04239         unsigned long LONG;
04240     struct {
04241
04242 #ifdef __RX_LITTLE_ENDIAN__
04243         unsigned long LIM1EN : 1;
04244         unsigned long LIM2EN : 1;
04245         unsigned long LIM3EN : 1;
04246         unsigned long LIM4EN : 1;
04247         unsigned long LIM5EN : 1;
04248         unsigned long LIM6EN : 1;
04249         unsigned long QUAD1EN : 1;
04250         unsigned long QUAD2EN : 1;
04251         unsigned long QUAD3EN : 1;
04252         unsigned long LIM1TH : 1;
04253         unsigned long LIM2TH : 1;
04254         unsigned long LIM3TH : 1;
04255         unsigned long LIM4TH : 1;
04256         unsigned long LIM5TH : 1;
04257         unsigned long LIM6TH : 1;
04258         unsigned long BAND1EN : 1;
04259         unsigned long BAND2EN : 1;
04260         unsigned long UNION12 : 1;
04261         unsigned long UNION34 : 1;
04262         unsigned long UNION56 : 1;
04263         unsigned long UNIONAB : 1;
04264         unsigned long UNIONCD : 1;
04265         unsigned long SPANABT : 1;
04266         unsigned long SPANSTR : 1;
04267         unsigned long : 8;
04268 #else
04269         unsigned long : 8;
04270         unsigned long SPANSTR : 1;
04271         unsigned long SPANABT : 1;
04272         unsigned long UNIONCD : 1;
04273         unsigned long UNIONAB : 1;
04274         unsigned long UNION56 : 1;
04275         unsigned long UNION34 : 1;
04276         unsigned long UNION12 : 1;
04277         unsigned long BAND2EN : 1;
04278         unsigned long BAND1EN : 1;
04279         unsigned long LIM6TH : 1;
04280         unsigned long LIM5TH : 1;
04281         unsigned long LIM4TH : 1;
04282         unsigned long LIM3TH : 1;
04283         unsigned long LIM2TH : 1;
04284         unsigned long LIM1TH : 1;
04285         unsigned long QUAD3EN : 1;
04286         unsigned long QUAD2EN : 1;
04287         unsigned long QUAD1EN : 1;
04288         unsigned long LIM6EN : 1;
04289         unsigned long LIM5EN : 1;
04290         unsigned long LIM4EN : 1;
04291         unsigned long LIM3EN : 1;
04292         unsigned long LIM2EN : 1;
04293         unsigned long LIM1EN : 1;
04294 #endif
04295     } BIT;
04296     } CONTROL;
04297     union {
04298         unsigned long LONG;
04299     struct {
04300
04301 #ifdef __RX_LITTLE_ENDIAN__
04302         unsigned long BSYENUM : 1;
04303         unsigned long BSYWR : 1;
04304         unsigned long CACHEDTY : 1;
04305         unsigned long DLSTACT : 1;
04306         unsigned long ENUIR : 1;
04307         unsigned long DLIR : 1;
04308         unsigned long : 26;
04309 #else
04310         unsigned long : 26;
04311         unsigned long DLIR : 1;
04312         unsigned long ENUIR : 1;
04313         unsigned long DLSTACT : 1;
04314         unsigned long CACHEDTY : 1;
04315         unsigned long BSYWR : 1;
04316         unsigned long BSYENUM : 1;
04317 #endif
04318     } BIT;
04319     } STATUS;
04320 };
04321 union {
04322     union {
04323         unsigned long LONG;
04324     struct {

```

```

04325
04326 #ifdef __RX_LITTLE_ENDIAN__
04327     unsigned long PTNEN : 1;
04328     unsigned long TEXENA : 1;
04329     unsigned long PTNSRCL5 : 1;
04330     unsigned long USEACB : 1;
04331     unsigned long RDFMT2 : 2;
04332     unsigned long BSFA : 1;
04333     unsigned long BDFA : 1;
04334     unsigned long WRFMT2 : 1;
04335     unsigned long BSF : 1;
04336     unsigned long BDF : 1;
04337     unsigned long BSI : 1;
04338     unsigned long BDI : 1;
04339     unsigned long BC2 : 1;
04340     unsigned long TEXCLPX : 1;
04341     unsigned long TEXCLPY : 1;
04342     unsigned long TEXTFLT : 1;
04343     unsigned long TEXTFLT : 1;
04344     unsigned long RDFMT : 2;
04345     unsigned long WRFMT : 2;
04346     unsigned long WRALPHA : 2;
04347     unsigned long RLEEN : 1;
04348     unsigned long CLUTEN : 1;
04349     unsigned long COLKEYEN : 1;
04350     unsigned long CLUTFORM : 1;
04351     unsigned long BSIA : 1;
04352     unsigned long BDIA : 1;
04353     unsigned long RLEPIXW : 2;
04354 #else
04355     unsigned long RLEPIXW : 2;
04356     unsigned long BDIA : 1;
04357     unsigned long BSIA : 1;
04358     unsigned long CLUTFORM : 1;
04359     unsigned long COLKEYEN : 1;
04360     unsigned long CLUTEN : 1;
04361     unsigned long RLEEN : 1;
04362     unsigned long WRALPHA : 2;
04363     unsigned long WRFMT : 2;
04364     unsigned long RDFMT : 2;
04365     unsigned long TEXTFLT : 1;
04366     unsigned long TEXTFLT : 1;
04367     unsigned long TEXCLPY : 1;
04368     unsigned long TEXCLPX : 1;
04369     unsigned long BC2 : 1;
04370     unsigned long BDI : 1;
04371     unsigned long BSI : 1;
04372     unsigned long BDF : 1;
04373     unsigned long BSF : 1;
04374     unsigned long WRFMT2 : 1;
04375     unsigned long BDFA : 1;
04376     unsigned long BSFA : 1;
04377     unsigned long RDFMT2 : 2;
04378     unsigned long USEACB : 1;
04379     unsigned long PTNSRCL5 : 1;
04380     unsigned long TEXENA : 1;
04381     unsigned long PTNEN : 1;
04382 #endif
04383 } BIT;
04384 } CONTROL2;
04385 union {
04386     unsigned long LONG;
04387     struct {
04388
04389 #ifdef __RX_LITTLE_ENDIAN__
04390     unsigned long REV : 12;
04391     unsigned long : 5;
04392     unsigned long DLR : 1;
04393     unsigned long FBCACHE : 1;
04394     unsigned long TXCACHE : 1;
04395     unsigned long PERFCNT : 1;
04396     unsigned long TEXCLUT : 1;
04397     unsigned long : 1;
04398     unsigned long RLEUNIT : 1;
04399     unsigned long TEXCLUT256 : 1;
04400     unsigned long COLKEY : 1;
04401     unsigned long : 1;
04402     unsigned long ACBLD : 1;
04403     unsigned long : 4;
04404 #else
04405     unsigned long : 4;
04406     unsigned long ACBLD : 1;
04407     unsigned long : 1;
04408     unsigned long COLKEY : 1;
04409     unsigned long TEXCLUT256 : 1;
04410     unsigned long RLEUNIT : 1;
04411     unsigned long : 1;

```

```

04412     unsigned long TEXCLUT : 1;
04413     unsigned long PERFCNT : 1;
04414     unsigned long TXCACHE : 1;
04415     unsigned long FBCACHE : 1;
04416     unsigned long DLR : 1;
04417     unsigned long : 5;
04418     unsigned long REV : 12;
04419 #endif
04420 } BIT;
04421 } HWVER;
04422 };
04423 char      wk0[8];
04424 unsigned long  L1START;
04425 unsigned long  L2START;
04426 unsigned long  L3START;
04427 unsigned long  L4START;
04428 unsigned long  L5START;
04429 unsigned long  L6START;
04430 unsigned long  L1XADD;
04431 unsigned long  L2XADD;
04432 unsigned long  L3XADD;
04433 unsigned long  L4XADD;
04434 unsigned long  L5XADD;
04435 unsigned long  L6XADD;
04436 unsigned long  L1YADD;
04437 unsigned long  L2YADD;
04438 unsigned long  L3YADD;
04439 unsigned long  L4YADD;
04440 unsigned long  L5YADD;
04441 unsigned long  L6YADD;
04442 unsigned long  L1BAND;
04443 unsigned long  L2BAND;
04444 char      wk1[4];
04445 union {
04446     unsigned long LONG;
04447     struct {
04448
04449 #ifdef __RX_LITTLE_ENDIAN__
04450     unsigned long COL1B : 8;
04451     unsigned long COL1G : 8;
04452     unsigned long COL1R : 8;
04453     unsigned long COL1A : 8;
04454 #else
04455     unsigned long COL1A : 8;
04456     unsigned long COL1R : 8;
04457     unsigned long COL1G : 8;
04458     unsigned long COL1B : 8;
04459 #endif
04460 } BIT;
04461 } COLOR1;
04462 union {
04463     unsigned long LONG;
04464     struct {
04465
04466 #ifdef __RX_LITTLE_ENDIAN__
04467     unsigned long COL2B : 8;
04468     unsigned long COL2G : 8;
04469     unsigned long COL2R : 8;
04470     unsigned long COL2A : 8;
04471 #else
04472     unsigned long COL2A : 8;
04473     unsigned long COL2R : 8;
04474     unsigned long COL2G : 8;
04475     unsigned long COL2B : 8;
04476 #endif
04477 } BIT;
04478 } COLOR2;
04479 char      wk2[8];
04480 unsigned long  PATTERN;
04481 union {
04482     unsigned long LONG;
04483     struct {
04484
04485 #ifdef __RX_LITTLE_ENDIAN__
04486     unsigned long X : 16;
04487     unsigned long Y : 16;
04488 #else
04489     unsigned long Y : 16;
04490     unsigned long X : 16;
04491 #endif
04492 } BIT;
04493 } SIZE;
04494 union {
04495     unsigned long LONG;
04496     struct {
04497
04498 #ifdef __RX_LITTLE_ENDIAN__

```

```

04499         unsigned long PITCH : 16;
04500         unsigned long SSD : 16;
04501 #else
04502         unsigned long SSD : 16;
04503         unsigned long PITCH : 16;
04504 #endif
04505     } BIT;
04506     } PITCH;
04507     unsigned long ORIGIN;
04508     char          wk3[12];
04509     unsigned long LUST;
04510     unsigned long LUXADD;
04511     unsigned long LUYADD;
04512     unsigned long LVSTI;
04513     unsigned long LVSTF;
04514     unsigned long LVXADDI;
04515     unsigned long LVYADDI;
04516     union {
04517         unsigned long LONG;
04518     } struct {
04519
04520 #ifdef __RX_LITTLE_ENDIAN__
04521         unsigned long LVXADDF : 16;
04522         unsigned long LVYADDF : 16;
04523 #else
04524         unsigned long LVYADDF : 16;
04525         unsigned long LVXADDF : 16;
04526 #endif
04527     } BIT;
04528     } LVYXADDF;
04529     char          wk4[4];
04530     unsigned long TEXPITCH;
04531     union {
04532         unsigned long LONG;
04533     } struct {
04534
04535 #ifdef __RX_LITTLE_ENDIAN__
04536         unsigned long TEXUMSK : 11;
04537         unsigned long TEXVMSK : 21;
04538 #else
04539         unsigned long TEXVMSK : 21;
04540         unsigned long TEXUMSK : 11;
04541 #endif
04542     } BIT;
04543     } TEXMSK;
04544     unsigned long TEXORG;
04545     union {
04546         unsigned long LONG;
04547     } struct {
04548
04549 #ifdef __RX_LITTLE_ENDIAN__
04550         unsigned long ENUIREN : 1;
04551         unsigned long DLIREN : 1;
04552         unsigned long ENUIRCLR : 1;
04553         unsigned long DLIRCLR : 1;
04554         unsigned long      : 28;
04555 #else
04556         unsigned long      : 28;
04557         unsigned long DLIRCLR : 1;
04558         unsigned long ENUIRCLR : 1;
04559         unsigned long DLIREN : 1;
04560         unsigned long ENUIREN : 1;
04561 #endif
04562     } BIT;
04563     } IRQCTL;
04564     union {
04565         unsigned long LONG;
04566     } struct {
04567
04568 #ifdef __RX_LITTLE_ENDIAN__
04569         unsigned long CENFX : 1;
04570         unsigned long CFLUFX : 1;
04571         unsigned long CENTX : 1;
04572         unsigned long CFLUTX : 1;
04573         unsigned long      : 28;
04574 #else
04575         unsigned long      : 28;
04576         unsigned long CFLUTX : 1;
04577         unsigned long CENTX : 1;
04578         unsigned long CFLUFX : 1;
04579         unsigned long CENFX : 1;
04580 #endif
04581     } BIT;
04582     } CACHECTL;
04583     unsigned long DLISTST;
04584     unsigned long PERFCNT1;
04585     unsigned long PERFCNT2;

```

```

04586     union {
04587         unsigned long LONG;
04588     struct {
04589
04590 #ifdef __RX_LITTLE_ENDIAN__
04591     unsigned long TRG1 : 16;
04592     unsigned long TRG2 : 16;
04593 #else
04594     unsigned long TRG2 : 16;
04595     unsigned long TRG1 : 16;
04596 #endif
04597     } BIT;
04598     } PERFTRG;
04599     char        wk5[4];
04600     unsigned long  TEXCLADDR;
04601     unsigned long  TEXCLDATA;
04602     unsigned long  TEXCLOFST;
04603     union {
04604         unsigned long LONG;
04605     struct {
04606
04607 #ifdef __RX_LITTLE_ENDIAN__
04608     unsigned long B : 8;
04609     unsigned long G : 8;
04610     unsigned long R : 8;
04611     unsigned long  : 8;
04612 #else
04613     unsigned long  : 8;
04614     unsigned long R : 8;
04615     unsigned long G : 8;
04616     unsigned long B : 8;
04617 #endif
04618     } BIT;
04619     } COLKEY;
04620 } st_drw2d_t;
04621
04622 typedef struct st_dtc {
04623     union {
04624         unsigned char BYTE;
04625     struct {
04626
04627 #ifdef __RX_LITTLE_ENDIAN__
04628     unsigned char  : 4;
04629     unsigned char RRS : 1;
04630     unsigned char  : 3;
04631 #else
04632     unsigned char  : 3;
04633     unsigned char RRS : 1;
04634     unsigned char  : 4;
04635 #endif
04636     } BIT;
04637     } DTCCR;
04638     char        wk0[3];
04639     void        *DTCVBR;
04640     union {
04641         unsigned char BYTE;
04642     struct {
04643
04644 #ifdef __RX_LITTLE_ENDIAN__
04645     unsigned char SHORT : 1;
04646     unsigned char  : 7;
04647 #else
04648     unsigned char  : 7;
04649     unsigned char SHORT : 1;
04650 #endif
04651     } BIT;
04652     } DTCADMOD;
04653     char        wk1[3];
04654     union {
04655         unsigned char BYTE;
04656     struct {
04657
04658 #ifdef __RX_LITTLE_ENDIAN__
04659     unsigned char DTCST : 1;
04660     unsigned char  : 7;
04661 #else
04662     unsigned char  : 7;
04663     unsigned char DTCST : 1;
04664 #endif
04665     } BIT;
04666     } DTCST;
04667     char        wk2[1];
04668     union {
04669         unsigned short WORD;
04670     struct {
04671
04672 #ifdef __RX_LITTLE_ENDIAN__

```

```

04673         unsigned short VECN : 8;
04674         unsigned short : 7;
04675         unsigned short ACT : 1;
04676 #else
04677         unsigned short ACT : 1;
04678         unsigned short : 7;
04679         unsigned short VECN : 8;
04680 #endif
04681     } BIT;
04682     } DTCSTS;
04683     void *DTCIBR;
04684     union {
04685         unsigned char BYTE;
04686         struct {
04687
04688 #ifdef __RX_LITTLE_ENDIAN__
04689         unsigned char SQTFRRL : 1;
04690         unsigned char : 7;
04691 #else
04692         unsigned char : 7;
04693         unsigned char SQTFRRL : 1;
04694 #endif
04695     } BIT;
04696     } DTCOR;
04697     char wk3[1];
04698     union {
04699         unsigned short WORD;
04700         struct {
04701
04702 #ifdef __RX_LITTLE_ENDIAN__
04703         unsigned short VECN : 8;
04704         unsigned short : 7;
04705         unsigned short ESPSEL : 1;
04706 #else
04707         unsigned short ESPSEL : 1;
04708         unsigned short : 7;
04709         unsigned short VECN : 8;
04710 #endif
04711     } BIT;
04712     } DTCSQE;
04713     unsigned long DTCDISP;
04714 } st_dtc_t;
04715
04716 typedef struct st_eccram {
04717     union {
04718         unsigned char BYTE;
04719         struct {
04720
04721 #ifdef __RX_LITTLE_ENDIAN__
04722         unsigned char RAMMOD : 2;
04723         unsigned char : 6;
04724 #else
04725         unsigned char : 6;
04726         unsigned char RAMMOD : 2;
04727 #endif
04728     } BIT;
04729     } ECCRAMMODE;
04730     union {
04731         unsigned char BYTE;
04732         struct {
04733
04734 #ifdef __RX_LITTLE_ENDIAN__
04735         unsigned char ECC2ERR : 1;
04736         unsigned char : 7;
04737 #else
04738         unsigned char : 7;
04739         unsigned char ECC2ERR : 1;
04740 #endif
04741     } BIT;
04742     } ECCRAM2STS;
04743     union {
04744         unsigned char BYTE;
04745         struct {
04746
04747 #ifdef __RX_LITTLE_ENDIAN__
04748         unsigned char ECC1STSEN : 1;
04749         unsigned char : 7;
04750 #else
04751         unsigned char : 7;
04752         unsigned char ECC1STSEN : 1;
04753 #endif
04754     } BIT;
04755     } ECCRAM1STSEN;
04756     union {
04757         unsigned char BYTE;
04758         struct {
04759

```

```

04760 #ifndef __RX_LITTLE_ENDIAN__
04761     unsigned char ECC1ERR : 1;
04762     unsigned char : 7;
04763 #else
04764     unsigned char : 7;
04765     unsigned char ECC1ERR : 1;
04766 #endif
04767 } BIT;
04768 } ECCRAM1STS;
04769 union {
04770     unsigned char BYTE;
04771     struct {
04772
04773 #ifndef __RX_LITTLE_ENDIAN__
04774     unsigned char PRCR : 1;
04775     unsigned char KW : 7;
04776 #else
04777     unsigned char KW : 7;
04778     unsigned char PRCR : 1;
04779 #endif
04780 } BIT;
04781 } ECCRAMPRCR;
04782 char wk0[3];
04783 union {
04784     unsigned long LONG;
04785     struct {
04786
04787 #ifndef __RX_LITTLE_ENDIAN__
04788     unsigned long : 3;
04789     unsigned long ECC2EAD : 12;
04790     unsigned long : 17;
04791 #else
04792     unsigned long : 17;
04793     unsigned long ECC2EAD : 12;
04794     unsigned long : 3;
04795 #endif
04796 } BIT;
04797 } ECCRAM2ECAD;
04798 union {
04799     unsigned long LONG;
04800     struct {
04801
04802 #ifndef __RX_LITTLE_ENDIAN__
04803     unsigned long : 3;
04804     unsigned long ECC1EAD : 12;
04805     unsigned long : 17;
04806 #else
04807     unsigned long : 17;
04808     unsigned long ECC1EAD : 12;
04809     unsigned long : 3;
04810 #endif
04811 } BIT;
04812 } ECCRAM1ECAD;
04813 union {
04814     unsigned char BYTE;
04815     struct {
04816
04817 #ifndef __RX_LITTLE_ENDIAN__
04818     unsigned char PRCR2 : 1;
04819     unsigned char KW2 : 7;
04820 #else
04821     unsigned char KW2 : 7;
04822     unsigned char PRCR2 : 1;
04823 #endif
04824 } BIT;
04825 } ECCRAMPRCR2;
04826 char wk1[3];
04827 union {
04828     unsigned char BYTE;
04829     struct {
04830
04831 #ifndef __RX_LITTLE_ENDIAN__
04832     unsigned char TSTBYP : 1;
04833     unsigned char : 7;
04834 #else
04835     unsigned char : 7;
04836     unsigned char TSTBYP : 1;
04837 #endif
04838 } BIT;
04839 } ECCRAMETST;
04840 } st_eccram_t;
04841
04842 typedef struct st_edmac {
04843     union {
04844         unsigned long LONG;
04845         struct {
04846

```

```

04847 #ifdef __RX_LITTLE_ENDIAN__
04848     unsigned long SWR : 1;
04849     unsigned long : 3;
04850     unsigned long DL : 2;
04851     unsigned long DE : 1;
04852     unsigned long : 25;
04853 #else
04854     unsigned long : 25;
04855     unsigned long DE : 1;
04856     unsigned long DL : 2;
04857     unsigned long : 3;
04858     unsigned long SWR : 1;
04859 #endif
04860 } BIT;
04861 } EDMR;
04862 char    wk0[4];
04863 union {
04864     unsigned long LONG;
04865     struct {
04866
04867 #ifdef __RX_LITTLE_ENDIAN__
04868         unsigned long TR : 1;
04869         unsigned long : 31;
04870 #else
04871         unsigned long : 31;
04872         unsigned long TR : 1;
04873 #endif
04874     } BIT;
04875     } EDTRR;
04876 char    wk1[4];
04877 union {
04878     unsigned long LONG;
04879     struct {
04880
04881 #ifdef __RX_LITTLE_ENDIAN__
04882         unsigned long RR : 1;
04883         unsigned long : 31;
04884 #else
04885         unsigned long : 31;
04886         unsigned long RR : 1;
04887 #endif
04888     } BIT;
04889     } EDRRR;
04890 char    wk2[4];
04891 void    *TDLAR;
04892 char    wk3[4];
04893 void    *RDLAR;
04894 char    wk4[4];
04895 union {
04896     unsigned long LONG;
04897     struct {
04898
04899 #ifdef __RX_LITTLE_ENDIAN__
04900         unsigned long CERF : 1;
04901         unsigned long PRE : 1;
04902         unsigned long RTSF : 1;
04903         unsigned long RTLF : 1;
04904         unsigned long RRF : 1;
04905         unsigned long : 2;
04906         unsigned long RMAF : 1;
04907         unsigned long TRO : 1;
04908         unsigned long CD : 1;
04909         unsigned long DLC : 1;
04910         unsigned long CND : 1;
04911         unsigned long : 4;
04912         unsigned long RFOF : 1;
04913         unsigned long RDE : 1;
04914         unsigned long FR : 1;
04915         unsigned long TFUF : 1;
04916         unsigned long TDE : 1;
04917         unsigned long TC : 1;
04918         unsigned long ECI : 1;
04919         unsigned long : 1;
04920         unsigned long RFCOF : 1;
04921         unsigned long RABT : 1;
04922         unsigned long TABT : 1;
04923         unsigned long : 3;
04924         unsigned long TWB : 1;
04925         unsigned long : 1;
04926 #else
04927         unsigned long : 1;
04928         unsigned long TWB : 1;
04929         unsigned long : 3;
04930         unsigned long TABT : 1;
04931         unsigned long RABT : 1;
04932         unsigned long RFCOF : 1;
04933         unsigned long : 1;

```

```

04934     unsigned long ECI : 1;
04935     unsigned long TC : 1;
04936     unsigned long TDE : 1;
04937     unsigned long TFUF : 1;
04938     unsigned long FR : 1;
04939     unsigned long RDE : 1;
04940     unsigned long RFOF : 1;
04941     unsigned long : 4;
04942     unsigned long CND : 1;
04943     unsigned long DLC : 1;
04944     unsigned long CD : 1;
04945     unsigned long TRO : 1;
04946     unsigned long RMAF : 1;
04947     unsigned long : 2;
04948     unsigned long RRF : 1;
04949     unsigned long RTLF : 1;
04950     unsigned long RTSF : 1;
04951     unsigned long PRE : 1;
04952     unsigned long CERF : 1;
04953 #endif
04954 } BIT;
04955 } EESR;
04956 char      wk5[4];
04957 union {
04958     unsigned long LONG;
04959     struct {
04960
04961 #ifdef __RX_LITTLE_ENDIAN__
04962     unsigned long CERFIP : 1;
04963     unsigned long PREIP : 1;
04964     unsigned long RTSFIP : 1;
04965     unsigned long RTLFIP : 1;
04966     unsigned long RRFIP : 1;
04967     unsigned long : 2;
04968     unsigned long RMAFIP : 1;
04969     unsigned long TROIP : 1;
04970     unsigned long CDIP : 1;
04971     unsigned long DLCIP : 1;
04972     unsigned long CNDIP : 1;
04973     unsigned long : 4;
04974     unsigned long RFOFIP : 1;
04975     unsigned long RDEIP : 1;
04976     unsigned long FRIP : 1;
04977     unsigned long TFUFIP : 1;
04978     unsigned long TDEIP : 1;
04979     unsigned long TCIP : 1;
04980     unsigned long ECIIP : 1;
04981     unsigned long : 1;
04982     unsigned long RFCOFIP : 1;
04983     unsigned long RABTIP : 1;
04984     unsigned long TABTIP : 1;
04985     unsigned long : 3;
04986     unsigned long TWBIP : 1;
04987     unsigned long : 1;
04988 #else
04989     unsigned long : 1;
04990     unsigned long TWBIP : 1;
04991     unsigned long : 3;
04992     unsigned long TABTIP : 1;
04993     unsigned long RABTIP : 1;
04994     unsigned long RFCOFIP : 1;
04995     unsigned long : 1;
04996     unsigned long ECIIP : 1;
04997     unsigned long TCIP : 1;
04998     unsigned long TDEIP : 1;
04999     unsigned long TFUFIP : 1;
05000     unsigned long FRIP : 1;
05001     unsigned long RDEIP : 1;
05002     unsigned long RFOFIP : 1;
05003     unsigned long : 4;
05004     unsigned long CNDIP : 1;
05005     unsigned long DLCIP : 1;
05006     unsigned long CDIP : 1;
05007     unsigned long TROIP : 1;
05008     unsigned long RMAFIP : 1;
05009     unsigned long : 2;
05010     unsigned long RRFIP : 1;
05011     unsigned long RTLFIP : 1;
05012     unsigned long RTSFIP : 1;
05013     unsigned long PREIP : 1;
05014     unsigned long CERFIP : 1;
05015 #endif
05016 } BIT;
05017 } EESIPR;
05018 char      wk6[4];
05019 union {
05020     unsigned long LONG;

```

```

05021     struct {
05022
05023 #ifdef __RX_LITTLE_ENDIAN__
05024     unsigned long : 4;
05025     unsigned long RRFCE : 1;
05026     unsigned long : 2;
05027     unsigned long RMAFCE : 1;
05028     unsigned long : 24;
05029 #else
05030     unsigned long : 24;
05031     unsigned long RMAFCE : 1;
05032     unsigned long : 2;
05033     unsigned long RRFCE : 1;
05034     unsigned long : 4;
05035 #endif
05036 } BIT;
05037 } TRSCER;
05038 char      wk7[4];
05039 union {
05040     unsigned long LONG;
05041     struct {
05042
05043 #ifdef __RX_LITTLE_ENDIAN__
05044     unsigned long MFC : 16;
05045     unsigned long : 16;
05046 #else
05047     unsigned long : 16;
05048     unsigned long MFC : 16;
05049 #endif
05050 } BIT;
05051 } RMFCR;
05052 char      wk8[4];
05053 union {
05054     unsigned long LONG;
05055     struct {
05056
05057 #ifdef __RX_LITTLE_ENDIAN__
05058     unsigned long TFT : 11;
05059     unsigned long : 21;
05060 #else
05061     unsigned long : 21;
05062     unsigned long TFT : 11;
05063 #endif
05064 } BIT;
05065 } TFTR;
05066 char      wk9[4];
05067 union {
05068     unsigned long LONG;
05069     struct {
05070
05071 #ifdef __RX_LITTLE_ENDIAN__
05072     unsigned long RFD : 5;
05073     unsigned long : 3;
05074     unsigned long TFD : 5;
05075     unsigned long : 19;
05076 #else
05077     unsigned long : 19;
05078     unsigned long TFD : 5;
05079     unsigned long : 3;
05080     unsigned long RFD : 5;
05081 #endif
05082 } BIT;
05083 } FDR;
05084 char      wk10[4];
05085 union {
05086     unsigned long LONG;
05087     struct {
05088
05089 #ifdef __RX_LITTLE_ENDIAN__
05090     unsigned long RNR : 1;
05091     unsigned long : 31;
05092 #else
05093     unsigned long : 31;
05094     unsigned long RNR : 1;
05095 #endif
05096 } BIT;
05097 } RMCR;
05098 char      wk11[8];
05099 union {
05100     unsigned long LONG;
05101     struct {
05102
05103 #ifdef __RX_LITTLE_ENDIAN__
05104     unsigned long UNDER : 16;
05105     unsigned long : 16;
05106 #else
05107     unsigned long : 16;

```

```

05108         unsigned long UNDER : 16;
05109 #endif
05110     } BIT;
05111     } TFUCR;
05112     union {
05113         unsigned long LONG;
05114         struct {
05115
05116 #ifdef __RX_LITTLE_ENDIAN__
05117         unsigned long OVER : 16;
05118         unsigned long : 16;
05119 #else
05120         unsigned long : 16;
05121         unsigned long OVER : 16;
05122 #endif
05123     } BIT;
05124     } RFOCR;
05125     union {
05126         unsigned long LONG;
05127         struct {
05128
05129 #ifdef __RX_LITTLE_ENDIAN__
05130         unsigned long ELB : 1;
05131         unsigned long : 31;
05132 #else
05133         unsigned long : 31;
05134         unsigned long ELB : 1;
05135 #endif
05136     } BIT;
05137     } IOSR;
05138     union {
05139         unsigned long LONG;
05140         struct {
05141
05142 #ifdef __RX_LITTLE_ENDIAN__
05143         unsigned long RFDO : 3;
05144         unsigned long : 13;
05145         unsigned long RFFO : 3;
05146         unsigned long : 13;
05147 #else
05148         unsigned long : 13;
05149         unsigned long RFFO : 3;
05150         unsigned long : 13;
05151         unsigned long RFDO : 3;
05152 #endif
05153     } BIT;
05154     } FCFTR;
05155     char        wk12[4];
05156     union {
05157         unsigned long LONG;
05158         struct {
05159
05160 #ifdef __RX_LITTLE_ENDIAN__
05161         unsigned long PADR : 6;
05162         unsigned long : 10;
05163         unsigned long PADS : 2;
05164         unsigned long : 14;
05165 #else
05166         unsigned long : 14;
05167         unsigned long PADS : 2;
05168         unsigned long : 10;
05169         unsigned long PADR : 6;
05170 #endif
05171     } BIT;
05172     } RPADIR;
05173     union {
05174         unsigned long LONG;
05175         struct {
05176
05177 #ifdef __RX_LITTLE_ENDIAN__
05178         unsigned long TIS : 1;
05179         unsigned long : 3;
05180         unsigned long TIM : 1;
05181         unsigned long : 27;
05182 #else
05183         unsigned long : 27;
05184         unsigned long TIM : 1;
05185         unsigned long : 3;
05186         unsigned long TIS : 1;
05187 #endif
05188     } BIT;
05189     } TRIMD;
05190     char        wk13[72];
05191     void        *RBWAR;
05192     void        *RDFAR;
05193     char        wk14[4];
05194     void        *TBRAR;

```

```
05195     void          *TDFAR;
05196 } st_edmac_t;
05197
05198 typedef struct st_elc {
05199     union {
05200         unsigned char BYTE;
05201         struct {
05202
05203 #ifdef __RX_LITTLE_ENDIAN__
05204         unsigned char : 7;
05205         unsigned char ELCON : 1;
05206 #else
05207         unsigned char ELCON : 1;
05208         unsigned char : 7;
05209 #endif
05210         } BIT;
05211         } ELCR;
05212     union {
05213         unsigned char BYTE;
05214         struct {
05215
05216 #ifdef __RX_LITTLE_ENDIAN__
05217         unsigned char ELS : 8;
05218 #else
05219         unsigned char ELS : 8;
05220 #endif
05221         } BIT;
05222         } ELSR0;
05223     char          wk0[2];
05224     union {
05225         unsigned char BYTE;
05226         struct {
05227
05228 #ifdef __RX_LITTLE_ENDIAN__
05229         unsigned char ELS : 8;
05230 #else
05231         unsigned char ELS : 8;
05232 #endif
05233         } BIT;
05234         } ELSR3;
05235     union {
05236         unsigned char BYTE;
05237         struct {
05238
05239 #ifdef __RX_LITTLE_ENDIAN__
05240         unsigned char ELS : 8;
05241 #else
05242         unsigned char ELS : 8;
05243 #endif
05244         } BIT;
05245         } ELSR4;
05246     char          wk1[2];
05247     union {
05248         unsigned char BYTE;
05249         struct {
05250
05251 #ifdef __RX_LITTLE_ENDIAN__
05252         unsigned char ELS : 8;
05253 #else
05254         unsigned char ELS : 8;
05255 #endif
05256         } BIT;
05257         } ELSR7;
05258     char          wk2[2];
05259     union {
05260         unsigned char BYTE;
05261         struct {
05262
05263 #ifdef __RX_LITTLE_ENDIAN__
05264         unsigned char ELS : 8;
05265 #else
05266         unsigned char ELS : 8;
05267 #endif
05268         } BIT;
05269         } ELSR10;
05270     union {
05271         unsigned char BYTE;
05272         struct {
05273
05274 #ifdef __RX_LITTLE_ENDIAN__
05275         unsigned char ELS : 8;
05276 #else
05277         unsigned char ELS : 8;
05278 #endif
05279         } BIT;
05280         } ELSR11;
05281     union {
```

```
05282     unsigned char BYTE;
05283     struct {
05284
05285     #ifdef __RX_LITTLE_ENDIAN__
05286         unsigned char ELS : 8;
05287     #else
05288         unsigned char ELS : 8;
05289     #endif
05290     } BIT;
05291     } ELSR12;
05292     union {
05293         unsigned char BYTE;
05294     struct {
05295
05296     #ifdef __RX_LITTLE_ENDIAN__
05297         unsigned char ELS : 8;
05298     #else
05299         unsigned char ELS : 8;
05300     #endif
05301     } BIT;
05302     } ELSR13;
05303     char        wk3[1];
05304     union {
05305         unsigned char BYTE;
05306     struct {
05307
05308     #ifdef __RX_LITTLE_ENDIAN__
05309         unsigned char ELS : 8;
05310     #else
05311         unsigned char ELS : 8;
05312     #endif
05313     } BIT;
05314     } ELSR15;
05315     union {
05316         unsigned char BYTE;
05317     struct {
05318
05319     #ifdef __RX_LITTLE_ENDIAN__
05320         unsigned char ELS : 8;
05321     #else
05322         unsigned char ELS : 8;
05323     #endif
05324     } BIT;
05325     } ELSR16;
05326     char        wk4[1];
05327     union {
05328         unsigned char BYTE;
05329     struct {
05330
05331     #ifdef __RX_LITTLE_ENDIAN__
05332         unsigned char ELS : 8;
05333     #else
05334         unsigned char ELS : 8;
05335     #endif
05336     } BIT;
05337     } ELSR18;
05338     union {
05339         unsigned char BYTE;
05340     struct {
05341
05342     #ifdef __RX_LITTLE_ENDIAN__
05343         unsigned char ELS : 8;
05344     #else
05345         unsigned char ELS : 8;
05346     #endif
05347     } BIT;
05348     } ELSR19;
05349     union {
05350         unsigned char BYTE;
05351     struct {
05352
05353     #ifdef __RX_LITTLE_ENDIAN__
05354         unsigned char ELS : 8;
05355     #else
05356         unsigned char ELS : 8;
05357     #endif
05358     } BIT;
05359     } ELSR20;
05360     union {
05361         unsigned char BYTE;
05362     struct {
05363
05364     #ifdef __RX_LITTLE_ENDIAN__
05365         unsigned char ELS : 8;
05366     #else
05367         unsigned char ELS : 8;
05368     #endif
```

```
05369     } BIT;
05370     } ELSR21;
05371     union {
05372         unsigned char BYTE;
05373         struct {
05374
05375 #ifdef __RX_LITTLE_ENDIAN__
05376         unsigned char ELS : 8;
05377 #else
05378         unsigned char ELS : 8;
05379 #endif
05380     } BIT;
05381     } ELSR22;
05382     union {
05383         unsigned char BYTE;
05384         struct {
05385
05386 #ifdef __RX_LITTLE_ENDIAN__
05387         unsigned char ELS : 8;
05388 #else
05389         unsigned char ELS : 8;
05390 #endif
05391     } BIT;
05392     } ELSR23;
05393     union {
05394         unsigned char BYTE;
05395         struct {
05396
05397 #ifdef __RX_LITTLE_ENDIAN__
05398         unsigned char ELS : 8;
05399 #else
05400         unsigned char ELS : 8;
05401 #endif
05402     } BIT;
05403     } ELSR24;
05404     union {
05405         unsigned char BYTE;
05406         struct {
05407
05408 #ifdef __RX_LITTLE_ENDIAN__
05409         unsigned char ELS : 8;
05410 #else
05411         unsigned char ELS : 8;
05412 #endif
05413     } BIT;
05414     } ELSR25;
05415     union {
05416         unsigned char BYTE;
05417         struct {
05418
05419 #ifdef __RX_LITTLE_ENDIAN__
05420         unsigned char ELS : 8;
05421 #else
05422         unsigned char ELS : 8;
05423 #endif
05424     } BIT;
05425     } ELSR26;
05426     union {
05427         unsigned char BYTE;
05428         struct {
05429
05430 #ifdef __RX_LITTLE_ENDIAN__
05431         unsigned char ELS : 8;
05432 #else
05433         unsigned char ELS : 8;
05434 #endif
05435     } BIT;
05436     } ELSR27;
05437     union {
05438         unsigned char BYTE;
05439         struct {
05440
05441 #ifdef __RX_LITTLE_ENDIAN__
05442         unsigned char ELS : 8;
05443 #else
05444         unsigned char ELS : 8;
05445 #endif
05446     } BIT;
05447     } ELSR28;
05448     char          wk5[1];
05449     union {
05450         unsigned char BYTE;
05451         struct {
05452
05453 #ifdef __RX_LITTLE_ENDIAN__
05454         unsigned char MTU0MD : 2;
05455         unsigned char      : 4;
```

```
05456         unsigned char MTU3MD : 2;
05457 #else
05458         unsigned char MTU3MD : 2;
05459         unsigned char : 4;
05460         unsigned char MTU0MD : 2;
05461 #endif
05462     } BIT;
05463     } ELOPA;
05464     union {
05465         unsigned char BYTE;
05466         struct {
05467
05468 #ifdef __RX_LITTLE_ENDIAN__
05469         unsigned char MTU4MD : 2;
05470         unsigned char : 6;
05471 #else
05472         unsigned char : 6;
05473         unsigned char MTU4MD : 2;
05474 #endif
05475     } BIT;
05476     } ELOPB;
05477     union {
05478         unsigned char BYTE;
05479         struct {
05480
05481 #ifdef __RX_LITTLE_ENDIAN__
05482         unsigned char : 2;
05483         unsigned char CMT1MD : 2;
05484         unsigned char : 4;
05485 #else
05486         unsigned char : 4;
05487         unsigned char CMT1MD : 2;
05488         unsigned char : 2;
05489 #endif
05490     } BIT;
05491     } ELOPC;
05492     union {
05493         unsigned char BYTE;
05494         struct {
05495
05496 #ifdef __RX_LITTLE_ENDIAN__
05497         unsigned char TMR0MD : 2;
05498         unsigned char TMR1MD : 2;
05499         unsigned char TMR2MD : 2;
05500         unsigned char TMR3MD : 2;
05501 #else
05502         unsigned char TMR3MD : 2;
05503         unsigned char TMR2MD : 2;
05504         unsigned char TMR1MD : 2;
05505         unsigned char TMR0MD : 2;
05506 #endif
05507     } BIT;
05508     } ELOPD;
05509     union {
05510         unsigned char BYTE;
05511         struct {
05512
05513 #ifdef __RX_LITTLE_ENDIAN__
05514         unsigned char PGR0 : 1;
05515         unsigned char PGR1 : 1;
05516         unsigned char PGR2 : 1;
05517         unsigned char PGR3 : 1;
05518         unsigned char PGR4 : 1;
05519         unsigned char PGR5 : 1;
05520         unsigned char PGR6 : 1;
05521         unsigned char PGR7 : 1;
05522 #else
05523         unsigned char PGR7 : 1;
05524         unsigned char PGR6 : 1;
05525         unsigned char PGR5 : 1;
05526         unsigned char PGR4 : 1;
05527         unsigned char PGR3 : 1;
05528         unsigned char PGR2 : 1;
05529         unsigned char PGR1 : 1;
05530         unsigned char PGR0 : 1;
05531 #endif
05532     } BIT;
05533     } PGR1;
05534     union {
05535         unsigned char BYTE;
05536         struct {
05537
05538 #ifdef __RX_LITTLE_ENDIAN__
05539         unsigned char PGR0 : 1;
05540         unsigned char PGR1 : 1;
05541         unsigned char PGR2 : 1;
05542         unsigned char PGR3 : 1;
```

```

05543         unsigned char PGR4 : 1;
05544         unsigned char PGR5 : 1;
05545         unsigned char PGR6 : 1;
05546         unsigned char PGR7 : 1;
05547 #else
05548         unsigned char PGR7 : 1;
05549         unsigned char PGR6 : 1;
05550         unsigned char PGR5 : 1;
05551         unsigned char PGR4 : 1;
05552         unsigned char PGR3 : 1;
05553         unsigned char PGR2 : 1;
05554         unsigned char PGR1 : 1;
05555         unsigned char PGR0 : 1;
05556 #endif
05557     } BIT;
05558     } PGR2;
05559     union {
05560         unsigned char BYTE;
05561         struct {
05562
05563 #ifdef __RX_LITTLE_ENDIAN__
05564         unsigned char PGCI : 2;
05565         unsigned char PGCOVE : 1;
05566         unsigned char : 1;
05567         unsigned char PGCO : 3;
05568         unsigned char : 1;
05569 #else
05570         unsigned char : 1;
05571         unsigned char PGCO : 3;
05572         unsigned char : 1;
05573         unsigned char PGCOVE : 1;
05574         unsigned char PGCI : 2;
05575 #endif
05576     } BIT;
05577     } PGC1;
05578     union {
05579         unsigned char BYTE;
05580         struct {
05581
05582 #ifdef __RX_LITTLE_ENDIAN__
05583         unsigned char PGCI : 2;
05584         unsigned char PGCOVE : 1;
05585         unsigned char : 1;
05586         unsigned char PGCO : 3;
05587         unsigned char : 1;
05588 #else
05589         unsigned char : 1;
05590         unsigned char PGCO : 3;
05591         unsigned char : 1;
05592         unsigned char PGCOVE : 1;
05593         unsigned char PGCI : 2;
05594 #endif
05595     } BIT;
05596     } PGC2;
05597     union {
05598         unsigned char BYTE;
05599         struct {
05600
05601 #ifdef __RX_LITTLE_ENDIAN__
05602         unsigned char PDBF0 : 1;
05603         unsigned char PDBF1 : 1;
05604         unsigned char PDBF2 : 1;
05605         unsigned char PDBF3 : 1;
05606         unsigned char PDBF4 : 1;
05607         unsigned char PDBF5 : 1;
05608         unsigned char PDBF6 : 1;
05609         unsigned char PDBF7 : 1;
05610 #else
05611         unsigned char PDBF7 : 1;
05612         unsigned char PDBF6 : 1;
05613         unsigned char PDBF5 : 1;
05614         unsigned char PDBF4 : 1;
05615         unsigned char PDBF3 : 1;
05616         unsigned char PDBF2 : 1;
05617         unsigned char PDBF1 : 1;
05618         unsigned char PDBF0 : 1;
05619 #endif
05620     } BIT;
05621     } PDBF1;
05622     union {
05623         unsigned char BYTE;
05624         struct {
05625
05626 #ifdef __RX_LITTLE_ENDIAN__
05627         unsigned char PDBF0 : 1;
05628         unsigned char PDBF1 : 1;
05629         unsigned char PDBF2 : 1;

```

```
05630         unsigned char PDBF3 : 1;
05631         unsigned char PDBF4 : 1;
05632         unsigned char PDBF5 : 1;
05633         unsigned char PDBF6 : 1;
05634         unsigned char PDBF7 : 1;
05635 #else
05636         unsigned char PDBF7 : 1;
05637         unsigned char PDBF6 : 1;
05638         unsigned char PDBF5 : 1;
05639         unsigned char PDBF4 : 1;
05640         unsigned char PDBF3 : 1;
05641         unsigned char PDBF2 : 1;
05642         unsigned char PDBF1 : 1;
05643         unsigned char PDBF0 : 1;
05644 #endif
05645     } BIT;
05646     } PDBF2;
05647     union {
05648         unsigned char BYTE;
05649     struct {
05650
05651 #ifdef __RX_LITTLE_ENDIAN__
05652         unsigned char PSB : 3;
05653         unsigned char PSP : 2;
05654         unsigned char PSM : 2;
05655         unsigned char : 1;
05656 #else
05657         unsigned char : 1;
05658         unsigned char PSM : 2;
05659         unsigned char PSP : 2;
05660         unsigned char PSB : 3;
05661 #endif
05662     } BIT;
05663     } PEL0;
05664     union {
05665         unsigned char BYTE;
05666     struct {
05667
05668 #ifdef __RX_LITTLE_ENDIAN__
05669         unsigned char PSB : 3;
05670         unsigned char PSP : 2;
05671         unsigned char PSM : 2;
05672         unsigned char : 1;
05673 #else
05674         unsigned char : 1;
05675         unsigned char PSM : 2;
05676         unsigned char PSP : 2;
05677         unsigned char PSB : 3;
05678 #endif
05679     } BIT;
05680     } PEL1;
05681     union {
05682         unsigned char BYTE;
05683     struct {
05684
05685 #ifdef __RX_LITTLE_ENDIAN__
05686         unsigned char PSB : 3;
05687         unsigned char PSP : 2;
05688         unsigned char PSM : 2;
05689         unsigned char : 1;
05690 #else
05691         unsigned char : 1;
05692         unsigned char PSM : 2;
05693         unsigned char PSP : 2;
05694         unsigned char PSB : 3;
05695 #endif
05696     } BIT;
05697     } PEL2;
05698     union {
05699         unsigned char BYTE;
05700     struct {
05701
05702 #ifdef __RX_LITTLE_ENDIAN__
05703         unsigned char PSB : 3;
05704         unsigned char PSP : 2;
05705         unsigned char PSM : 2;
05706         unsigned char : 1;
05707 #else
05708         unsigned char : 1;
05709         unsigned char PSM : 2;
05710         unsigned char PSP : 2;
05711         unsigned char PSB : 3;
05712 #endif
05713     } BIT;
05714     } PEL3;
05715     union {
05716         unsigned char BYTE;
```

```
05717 #ifndef IODEFINE_H_HISTORY
05718     struct {
05719
05720 #ifndef __RX_LITTLE_ENDIAN__
05721         unsigned char SEG : 1;
05722         unsigned char : 5;
05723         unsigned char WE : 1;
05724         unsigned char WI : 1;
05725 #else
05726         unsigned char WI : 1;
05727         unsigned char WE : 1;
05728         unsigned char : 5;
05729         unsigned char SEG : 1;
05730 #endif
05731     } BIT;
05732 #endif
05733     } ELSEGR;
05734     char        wk6[3];
05735     union {
05736         unsigned char BYTE;
05737         struct {
05738
05739 #ifndef __RX_LITTLE_ENDIAN__
05740         unsigned char ELS : 8;
05741 #else
05742         unsigned char ELS : 8;
05743 #endif
05744     } BIT;
05745     } ELSR33;
05746     char        wk7[1];
05747     union {
05748         unsigned char BYTE;
05749         struct {
05750
05751 #ifndef __RX_LITTLE_ENDIAN__
05752         unsigned char ELS : 8;
05753 #else
05754         unsigned char ELS : 8;
05755 #endif
05756     } BIT;
05757     } ELSR35;
05758     union {
05759         unsigned char BYTE;
05760         struct {
05761
05762 #ifndef __RX_LITTLE_ENDIAN__
05763         unsigned char ELS : 8;
05764 #else
05765         unsigned char ELS : 8;
05766 #endif
05767     } BIT;
05768     } ELSR36;
05769     union {
05770         unsigned char BYTE;
05771         struct {
05772
05773 #ifndef __RX_LITTLE_ENDIAN__
05774         unsigned char ELS : 8;
05775 #else
05776         unsigned char ELS : 8;
05777 #endif
05778     } BIT;
05779     } ELSR37;
05780     union {
05781         unsigned char BYTE;
05782         struct {
05783
05784 #ifndef __RX_LITTLE_ENDIAN__
05785         unsigned char ELS : 8;
05786 #else
05787         unsigned char ELS : 8;
05788 #endif
05789     } BIT;
05790     } ELSR38;
05791     char        wk8[6];
05792     union {
05793         unsigned char BYTE;
05794         struct {
05795
05796 #ifndef __RX_LITTLE_ENDIAN__
05797         unsigned char ELS : 8;
05798 #else
05799         unsigned char ELS : 8;
05800 #endif
05801     } BIT;
05802     } ELSR45;
05803     char        wk9[1];
```

```
05804     union {
05805         unsigned char BYTE;
05806     struct {
05807
05808 #ifdef __RX_LITTLE_ENDIAN__
05809         unsigned char TPU0MD : 2;
05810         unsigned char TPU1MD : 2;
05811         unsigned char TPU2MD : 2;
05812         unsigned char TPU3MD : 2;
05813 #else
05814         unsigned char TPU3MD : 2;
05815         unsigned char TPU2MD : 2;
05816         unsigned char TPU1MD : 2;
05817         unsigned char TPU0MD : 2;
05818 #endif
05819     } BIT;
05820     } ELOPF;
05821     char        wk10[1];
05822     union {
05823         unsigned char BYTE;
05824     struct {
05825
05826 #ifdef __RX_LITTLE_ENDIAN__
05827         unsigned char CMTW0MD : 2;
05828         unsigned char      : 6;
05829 #else
05830         unsigned char      : 6;
05831         unsigned char CMTW0MD : 2;
05832 #endif
05833     } BIT;
05834     } ELOPH;
05835     char        wk11[4];
05836     union {
05837         unsigned char BYTE;
05838     struct {
05839
05840 #ifdef __RX_LITTLE_ENDIAN__
05841         unsigned char ELS : 8;
05842 #else
05843         unsigned char ELS : 8;
05844 #endif
05845     } BIT;
05846     } ELSR48;
05847     union {
05848         unsigned char BYTE;
05849     struct {
05850
05851 #ifdef __RX_LITTLE_ENDIAN__
05852         unsigned char ELS : 8;
05853 #else
05854         unsigned char ELS : 8;
05855 #endif
05856     } BIT;
05857     } ELSR49;
05858     union {
05859         unsigned char BYTE;
05860     struct {
05861
05862 #ifdef __RX_LITTLE_ENDIAN__
05863         unsigned char ELS : 8;
05864 #else
05865         unsigned char ELS : 8;
05866 #endif
05867     } BIT;
05868     } ELSR50;
05869     union {
05870         unsigned char BYTE;
05871     struct {
05872
05873 #ifdef __RX_LITTLE_ENDIAN__
05874         unsigned char ELS : 8;
05875 #else
05876         unsigned char ELS : 8;
05877 #endif
05878     } BIT;
05879     } ELSR51;
05880     union {
05881         unsigned char BYTE;
05882     struct {
05883
05884 #ifdef __RX_LITTLE_ENDIAN__
05885         unsigned char ELS : 8;
05886 #else
05887         unsigned char ELS : 8;
05888 #endif
05889     } BIT;
05890     } ELSR52;
```

```
05891     union {
05892         unsigned char BYTE;
05893     struct {
05894
05895 #ifdef __RX_LITTLE_ENDIAN__
05896         unsigned char ELS : 8;
05897 #else
05898         unsigned char ELS : 8;
05899 #endif
05900     } BIT;
05901     } ELSR53;
05902     union {
05903         unsigned char BYTE;
05904     struct {
05905
05906 #ifdef __RX_LITTLE_ENDIAN__
05907         unsigned char ELS : 8;
05908 #else
05909         unsigned char ELS : 8;
05910 #endif
05911     } BIT;
05912     } ELSR54;
05913     union {
05914         unsigned char BYTE;
05915     struct {
05916
05917 #ifdef __RX_LITTLE_ENDIAN__
05918         unsigned char ELS : 8;
05919 #else
05920         unsigned char ELS : 8;
05921 #endif
05922     } BIT;
05923     } ELSR55;
05924     union {
05925         unsigned char BYTE;
05926     struct {
05927
05928 #ifdef __RX_LITTLE_ENDIAN__
05929         unsigned char ELS : 8;
05930 #else
05931         unsigned char ELS : 8;
05932 #endif
05933     } BIT;
05934     } ELSR56;
05935     union {
05936         unsigned char BYTE;
05937     struct {
05938
05939 #ifdef __RX_LITTLE_ENDIAN__
05940         unsigned char ELS : 8;
05941 #else
05942         unsigned char ELS : 8;
05943 #endif
05944     } BIT;
05945     } ELSR57;
05946 } st_elc_t;
05947
05948 typedef struct st_eptpc {
05949     union {
05950         unsigned long LONG;
05951     struct {
05952
05953 #ifdef __RX_LITTLE_ENDIAN__
05954         unsigned long RESET : 1;
05955         unsigned long : 31;
05956 #else
05957         unsigned long : 31;
05958         unsigned long RESET : 1;
05959 #endif
05960     } BIT;
05961     } PTRSTR;
05962     union {
05963         unsigned long LONG;
05964     struct {
05965
05966 #ifdef __RX_LITTLE_ENDIAN__
05967         unsigned long SCLKDIV : 3;
05968         unsigned long : 5;
05969         unsigned long SCLKSEL : 3;
05970         unsigned long : 21;
05971 #else
05972         unsigned long : 21;
05973         unsigned long SCLKSEL : 3;
05974         unsigned long : 5;
05975         unsigned long SCLKDIV : 3;
05976 #endif
05977     } BIT;
```

```

05978     } STCSELR;
05979     union {
05980         unsigned long LONG;
05981         struct {
05982
05983 #ifdef __RX_LITTLE_ENDIAN__
05984         unsigned long BYPASS0 : 1;
05985         unsigned long : 15;
05986         unsigned long BYPASS1 : 1;
05987         unsigned long : 15;
05988 #else
05989         unsigned long : 15;
05990         unsigned long BYPASS1 : 1;
05991         unsigned long : 15;
05992         unsigned long BYPASS0 : 1;
05993 #endif
05994     } BIT;
05995     } SYBYP SR;
05996     char      wk0[15092];
05997     unsigned long MIESR;
05998     union {
05999         unsigned long LONG;
06000         struct {
06001
06002 #ifdef __RX_LITTLE_ENDIAN__
06003         unsigned long ST : 1;
06004         unsigned long SY0 : 1;
06005         unsigned long SY1 : 1;
06006         unsigned long PR : 1;
06007         unsigned long : 12;
06008         unsigned long CYC0 : 1;
06009         unsigned long CYC1 : 1;
06010         unsigned long CYC2 : 1;
06011         unsigned long CYC3 : 1;
06012         unsigned long CYC4 : 1;
06013         unsigned long CYC5 : 1;
06014         unsigned long : 10;
06015 #else
06016         unsigned long : 10;
06017         unsigned long CYC5 : 1;
06018         unsigned long CYC4 : 1;
06019         unsigned long CYC3 : 1;
06020         unsigned long CYC2 : 1;
06021         unsigned long CYC1 : 1;
06022         unsigned long CYC0 : 1;
06023         unsigned long : 12;
06024         unsigned long PR : 1;
06025         unsigned long SY1 : 1;
06026         unsigned long SY0 : 1;
06027         unsigned long ST : 1;
06028 #endif
06029     } BIT;
06030     } MIEIPR;
06031     char      wk1[8];
06032     union {
06033         unsigned long LONG;
06034         struct {
06035
06036 #ifdef __RX_LITTLE_ENDIAN__
06037         unsigned long CYCP0 : 1;
06038         unsigned long CYCP1 : 1;
06039         unsigned long CYCP2 : 1;
06040         unsigned long CYCP3 : 1;
06041         unsigned long CYCP4 : 1;
06042         unsigned long CYCP5 : 1;
06043         unsigned long : 2;
06044         unsigned long CYCN0 : 1;
06045         unsigned long CYCN1 : 1;
06046         unsigned long CYCN2 : 1;
06047         unsigned long CYCN3 : 1;
06048         unsigned long CYCN4 : 1;
06049         unsigned long CYCN5 : 1;
06050         unsigned long : 2;
06051         unsigned long PLSP : 1;
06052         unsigned long : 7;
06053         unsigned long PLSN : 1;
06054         unsigned long : 7;
06055 #else
06056         unsigned long : 7;
06057         unsigned long PLSN : 1;
06058         unsigned long : 7;
06059         unsigned long PLSP : 1;
06060         unsigned long : 2;
06061         unsigned long CYCN5 : 1;
06062         unsigned long CYCN4 : 1;
06063         unsigned long CYCN3 : 1;
06064         unsigned long CYCN2 : 1;

```

```

06065         unsigned long CYCN1 : 1;
06066         unsigned long CYCN0 : 1;
06067         unsigned long   : 2;
06068         unsigned long CYCP5 : 1;
06069         unsigned long CYCP4 : 1;
06070         unsigned long CYCP3 : 1;
06071         unsigned long CYCP2 : 1;
06072         unsigned long CYCP1 : 1;
06073         unsigned long CYCP0 : 1;
06074 #endif
06075     } BIT;
06076     } ELIPPR;
06077     union {
06078         unsigned long LONG;
06079         struct {
06080
06081 #ifdef __RX_LITTLE_ENDIAN__
06082         unsigned long CYCP0 : 1;
06083         unsigned long CYCP1 : 1;
06084         unsigned long CYCP2 : 1;
06085         unsigned long CYCP3 : 1;
06086         unsigned long CYCP4 : 1;
06087         unsigned long CYCP5 : 1;
06088         unsigned long   : 2;
06089         unsigned long CYCN0 : 1;
06090         unsigned long CYCN1 : 1;
06091         unsigned long CYCN2 : 1;
06092         unsigned long CYCN3 : 1;
06093         unsigned long CYCN4 : 1;
06094         unsigned long CYCN5 : 1;
06095         unsigned long   : 2;
06096         unsigned long PLSP : 1;
06097         unsigned long   : 7;
06098         unsigned long PLSN : 1;
06099         unsigned long   : 7;
06100 #else
06101         unsigned long   : 7;
06102         unsigned long PLSN : 1;
06103         unsigned long   : 7;
06104         unsigned long PLSP : 1;
06105         unsigned long   : 2;
06106         unsigned long CYCN5 : 1;
06107         unsigned long CYCN4 : 1;
06108         unsigned long CYCN3 : 1;
06109         unsigned long CYCN2 : 1;
06110         unsigned long CYCN1 : 1;
06111         unsigned long CYCN0 : 1;
06112         unsigned long   : 2;
06113         unsigned long CYCP5 : 1;
06114         unsigned long CYCP4 : 1;
06115         unsigned long CYCP3 : 1;
06116         unsigned long CYCP2 : 1;
06117         unsigned long CYCP1 : 1;
06118         unsigned long CYCP0 : 1;
06119 #endif
06120     } BIT;
06121     } ELIPACR;
06122     char          wk2[40];
06123     unsigned long STSR;
06124     union {
06125         unsigned long LONG;
06126         struct {
06127
06128 #ifdef __RX_LITTLE_ENDIAN__
06129         unsigned long SYNC : 1;
06130         unsigned long SYNCOUT : 1;
06131         unsigned long   : 1;
06132         unsigned long SYNTOUT : 1;
06133         unsigned long W10D : 1;
06134         unsigned long   : 27;
06135 #else
06136         unsigned long   : 27;
06137         unsigned long W10D : 1;
06138         unsigned long SYNTOUT : 1;
06139         unsigned long   : 1;
06140         unsigned long SYNCOUT : 1;
06141         unsigned long SYNC : 1;
06142 #endif
06143     } BIT;
06144     } STIPR;
06145     char          wk3[8];
06146     union {
06147         unsigned long LONG;
06148         struct {
06149
06150 #ifdef __RX_LITTLE_ENDIAN__
06151         unsigned long STCF : 2;

```

```

06152         unsigned long : 30;
06153 #else
06154         unsigned long : 30;
06155         unsigned long STCF : 2;
06156 #endif
06157     } BIT;
06158     } STCFR;
06159     union {
06160         unsigned long LONG;
06161         struct {
06162
06163 #ifdef __RX_LITTLE_ENDIAN__
06164         unsigned long WINT : 8;
06165         unsigned long : 5;
06166         unsigned long CMOD : 1;
06167         unsigned long : 1;
06168         unsigned long W10S : 1;
06169         unsigned long SYTH : 4;
06170         unsigned long DVTH : 4;
06171         unsigned long : 4;
06172         unsigned long ALEN0 : 1;
06173         unsigned long ALEN1 : 1;
06174         unsigned long : 2;
06175 #else
06176         unsigned long : 2;
06177         unsigned long ALEN1 : 1;
06178         unsigned long ALEN0 : 1;
06179         unsigned long : 4;
06180         unsigned long DVTH : 4;
06181         unsigned long SYTH : 4;
06182         unsigned long W10S : 1;
06183         unsigned long : 1;
06184         unsigned long CMOD : 1;
06185         unsigned long : 5;
06186         unsigned long WINT : 8;
06187 #endif
06188     } BIT;
06189     } STMR;
06190     unsigned long SYNTOR;
06191     char wk4[4];
06192     union {
06193         unsigned long LONG;
06194         struct {
06195
06196 #ifdef __RX_LITTLE_ENDIAN__
06197         unsigned long IPTSEL0 : 1;
06198         unsigned long IPTSEL1 : 1;
06199         unsigned long IPTSEL2 : 1;
06200         unsigned long IPTSEL3 : 1;
06201         unsigned long IPTSEL4 : 1;
06202         unsigned long IPTSEL5 : 1;
06203         unsigned long : 26;
06204 #else
06205         unsigned long : 26;
06206         unsigned long IPTSEL5 : 1;
06207         unsigned long IPTSEL4 : 1;
06208         unsigned long IPTSEL3 : 1;
06209         unsigned long IPTSEL2 : 1;
06210         unsigned long IPTSEL1 : 1;
06211         unsigned long IPTSEL0 : 1;
06212 #endif
06213     } BIT;
06214     } IPTSELR;
06215     union {
06216         unsigned long LONG;
06217         struct {
06218
06219 #ifdef __RX_LITTLE_ENDIAN__
06220         unsigned long MINTEN0 : 1;
06221         unsigned long MINTEN1 : 1;
06222         unsigned long MINTEN2 : 1;
06223         unsigned long MINTEN3 : 1;
06224         unsigned long MINTEN4 : 1;
06225         unsigned long MINTEN5 : 1;
06226         unsigned long : 26;
06227 #else
06228         unsigned long : 26;
06229         unsigned long MINTEN5 : 1;
06230         unsigned long MINTEN4 : 1;
06231         unsigned long MINTEN3 : 1;
06232         unsigned long MINTEN2 : 1;
06233         unsigned long MINTEN1 : 1;
06234         unsigned long MINTEN0 : 1;
06235 #endif
06236     } BIT;
06237     } MITSELR;
06238     union {

```

```

06239     unsigned long LONG;
06240     struct {
06241
06242 #ifdef __RX_LITTLE_ENDIAN__
06243     unsigned long ELTDIS0 : 1;
06244     unsigned long ELTDIS1 : 1;
06245     unsigned long ELTDIS2 : 1;
06246     unsigned long ELTDIS3 : 1;
06247     unsigned long ELTDIS4 : 1;
06248     unsigned long ELTDIS5 : 1;
06249     unsigned long   : 26;
06250 #else
06251     unsigned long   : 26;
06252     unsigned long ELTDIS5 : 1;
06253     unsigned long ELTDIS4 : 1;
06254     unsigned long ELTDIS3 : 1;
06255     unsigned long ELTDIS2 : 1;
06256     unsigned long ELTDIS1 : 1;
06257     unsigned long ELTDIS0 : 1;
06258 #endif
06259     } BIT;
06260     } ELTSEL;
06261     union {
06262     unsigned long LONG;
06263     struct {
06264
06265 #ifdef __RX_LITTLE_ENDIAN__
06266     unsigned long SYSEL : 1;
06267     unsigned long   : 31;
06268 #else
06269     unsigned long   : 31;
06270     unsigned long SYSEL : 1;
06271 #endif
06272     } BIT;
06273     } STCHSEL;
06274     char      wk5[16];
06275     union {
06276     unsigned long LONG;
06277     struct {
06278
06279 #ifdef __RX_LITTLE_ENDIAN__
06280     unsigned long STR : 1;
06281     unsigned long   : 31;
06282 #else
06283     unsigned long   : 31;
06284     unsigned long STR : 1;
06285 #endif
06286     } BIT;
06287     } SYNSTARTR;
06288     union {
06289     unsigned long LONG;
06290     struct {
06291
06292 #ifdef __RX_LITTLE_ENDIAN__
06293     unsigned long LOAD : 1;
06294     unsigned long   : 31;
06295 #else
06296     unsigned long   : 31;
06297     unsigned long LOAD : 1;
06298 #endif
06299     } BIT;
06300     } LCIVLDR;
06301     char      wk6[8];
06302     unsigned long SYNTDARU;
06303     unsigned long SYNTDARL;
06304     unsigned long SYNTDBRU;
06305     unsigned long SYNTDBRL;
06306     char      wk7[16];
06307     union {
06308     unsigned long LONG;
06309     struct {
06310
06311 #ifdef __RX_LITTLE_ENDIAN__
06312     unsigned long VALU : 16;
06313     unsigned long   : 16;
06314 #else
06315     unsigned long   : 16;
06316     unsigned long VALU : 16;
06317 #endif
06318     } BIT;
06319     } LCIVRU;
06320     unsigned long LCIVRM;
06321     unsigned long LCIVRL;
06322     char      wk8[104];
06323     union {
06324     unsigned long LONG;
06325     struct {

```

```

06326
06327 #ifdef __RX_LITTLE_ENDIAN__
06328     unsigned long GW10 : 1;
06329     unsigned long : 31;
06330 #else
06331     unsigned long : 31;
06332     unsigned long GW10 : 1;
06333 #endif
06334 } BIT;
06335 } GETW10R;
06336 union {
06337     unsigned long LONG;
06338     struct {
06339
06340 #ifdef __RX_LITTLE_ENDIAN__
06341     unsigned long LMTU : 31;
06342     unsigned long : 1;
06343 #else
06344     unsigned long : 1;
06345     unsigned long LMTU : 31;
06346 #endif
06347     } BIT;
06348     } PLIMITRU;
06349     unsigned long PLIMITRM;
06350     unsigned long PLIMITRL;
06351     union {
06352         unsigned long LONG;
06353         struct {
06354
06355 #ifdef __RX_LITTLE_ENDIAN__
06356     unsigned long LMTU : 31;
06357     unsigned long : 1;
06358 #else
06359     unsigned long : 1;
06360     unsigned long LMTU : 31;
06361 #endif
06362     } BIT;
06363     } MLIMITRU;
06364     unsigned long MLIMITRM;
06365     unsigned long MLIMITRL;
06366     union {
06367         unsigned long LONG;
06368         struct {
06369
06370 #ifdef __RX_LITTLE_ENDIAN__
06371     unsigned long INFO : 1;
06372     unsigned long : 31;
06373 #else
06374     unsigned long : 31;
06375     unsigned long INFO : 1;
06376 #endif
06377     } BIT;
06378     } GETINFOR;
06379     char wk9[44];
06380     union {
06381         unsigned long LONG;
06382         struct {
06383
06384 #ifdef __RX_LITTLE_ENDIAN__
06385     unsigned long CNTU : 16;
06386     unsigned long : 16;
06387 #else
06388     unsigned long : 16;
06389     unsigned long CNTU : 16;
06390 #endif
06391     } BIT;
06392     } LCCVRU;
06393     unsigned long LCCVRM;
06394     unsigned long LCCVRL;
06395     char wk10[148];
06396     unsigned long PW10VRU;
06397     unsigned long PW10VRM;
06398     unsigned long PW10VRL;
06399     char wk11[180];
06400     unsigned long MW10RU;
06401     unsigned long MW10RM;
06402     unsigned long MW10RL;
06403     char wk12[36];
06404     unsigned long TMSTTRU0;
06405     unsigned long TMSTTRL0;
06406     union {
06407         unsigned long LONG;
06408         struct {
06409
06410 #ifdef __RX_LITTLE_ENDIAN__
06411     unsigned long CYC : 30;
06412     unsigned long : 2;

```

```

06413  #else
06414      unsigned long : 2;
06415      unsigned long CYC : 30;
06416  #endif
06417      } BIT;
06418      } TMCYCR0;
06419      union {
06420          unsigned long LONG;
06421          struct {
06422
06423  #ifdef  _RX_LITTLE_ENDIAN
06424          unsigned long WTH : 29;
06425          unsigned long : 3;
06426  #else
06427          unsigned long : 3;
06428          unsigned long WTH : 29;
06429  #endif
06430      } BIT;
06431      } TEMPLSR0;
06432      unsigned long  TMSTTRU1;
06433      unsigned long  TMSTTRL1;
06434      union {
06435          unsigned long LONG;
06436          struct {
06437
06438  #ifdef  _RX_LITTLE_ENDIAN
06439          unsigned long CYC : 30;
06440          unsigned long : 2;
06441  #else
06442          unsigned long : 2;
06443          unsigned long CYC : 30;
06444  #endif
06445      } BIT;
06446      } TMCYCR1;
06447      union {
06448          unsigned long LONG;
06449          struct {
06450
06451  #ifdef  _RX_LITTLE_ENDIAN
06452          unsigned long WTH : 29;
06453          unsigned long : 3;
06454  #else
06455          unsigned long : 3;
06456          unsigned long WTH : 29;
06457  #endif
06458      } BIT;
06459      } TEMPLSR1;
06460      unsigned long  TMSTTRU2;
06461      unsigned long  TMSTTRL2;
06462      union {
06463          unsigned long LONG;
06464          struct {
06465
06466  #ifdef  _RX_LITTLE_ENDIAN
06467          unsigned long CYC : 30;
06468          unsigned long : 2;
06469  #else
06470          unsigned long : 2;
06471          unsigned long CYC : 30;
06472  #endif
06473      } BIT;
06474      } TMCYCR2;
06475      union {
06476          unsigned long LONG;
06477          struct {
06478
06479  #ifdef  _RX_LITTLE_ENDIAN
06480          unsigned long WTH : 29;
06481          unsigned long : 3;
06482  #else
06483          unsigned long : 3;
06484          unsigned long WTH : 29;
06485  #endif
06486      } BIT;
06487      } TEMPLSR2;
06488      unsigned long  TMSTTRU3;
06489      unsigned long  TMSTTRL3;
06490      union {
06491          unsigned long LONG;
06492          struct {
06493
06494  #ifdef  _RX_LITTLE_ENDIAN
06495          unsigned long CYC : 30;
06496          unsigned long : 2;
06497  #else
06498          unsigned long : 2;
06499          unsigned long CYC : 30;

```

```

06500 #endif
06501     } BIT;
06502     } TMCYCR3;
06503     union {
06504         unsigned long LONG;
06505         struct {
06506
06507 #ifdef __RX_LITTLE_ENDIAN__
06508         unsigned long WTH : 29;
06509         unsigned long : 3;
06510 #else
06511         unsigned long : 3;
06512         unsigned long WTH : 29;
06513 #endif
06514     } BIT;
06515     } TMPLSR3;
06516     unsigned long TMSTTRU4;
06517     unsigned long TMSTTRL4;
06518     union {
06519         unsigned long LONG;
06520         struct {
06521
06522 #ifdef __RX_LITTLE_ENDIAN__
06523         unsigned long CYC : 30;
06524         unsigned long : 2;
06525 #else
06526         unsigned long : 2;
06527         unsigned long CYC : 30;
06528 #endif
06529     } BIT;
06530     } TMCYCR4;
06531     union {
06532         unsigned long LONG;
06533         struct {
06534
06535 #ifdef __RX_LITTLE_ENDIAN__
06536         unsigned long WTH : 29;
06537         unsigned long : 3;
06538 #else
06539         unsigned long : 3;
06540         unsigned long WTH : 29;
06541 #endif
06542     } BIT;
06543     } TMPLSR4;
06544     unsigned long TMSTTRU5;
06545     unsigned long TMSTTRL5;
06546     union {
06547         unsigned long LONG;
06548         struct {
06549
06550 #ifdef __RX_LITTLE_ENDIAN__
06551         unsigned long CYC : 30;
06552         unsigned long : 2;
06553 #else
06554         unsigned long : 2;
06555         unsigned long CYC : 30;
06556 #endif
06557     } BIT;
06558     } TMCYCR5;
06559     union {
06560         unsigned long LONG;
06561         struct {
06562
06563 #ifdef __RX_LITTLE_ENDIAN__
06564         unsigned long WTH : 29;
06565         unsigned long : 3;
06566 #else
06567         unsigned long : 3;
06568         unsigned long WTH : 29;
06569 #endif
06570     } BIT;
06571     } TMPLSR5;
06572     char wk13[28];
06573     union {
06574         unsigned long LONG;
06575         struct {
06576
06577 #ifdef __RX_LITTLE_ENDIAN__
06578         unsigned long EN0 : 1;
06579         unsigned long EN1 : 1;
06580         unsigned long EN2 : 1;
06581         unsigned long EN3 : 1;
06582         unsigned long EN4 : 1;
06583         unsigned long EN5 : 1;
06584         unsigned long : 26;
06585 #else
06586         unsigned long : 26;

```

```

06587         unsigned long EN5 : 1;
06588         unsigned long EN4 : 1;
06589         unsigned long EN3 : 1;
06590         unsigned long EN2 : 1;
06591         unsigned long EN1 : 1;
06592         unsigned long EN0 : 1;
06593     #endif
06594     } BIT;
06595     } TMSTARTR;
06596     char          wk14[128];
06597     unsigned long PRSR;
06598     union {
06599         unsigned long LONG;
06600     struct {
06601
06602     #ifdef __RX_LITTLE_ENDIAN__
06603         unsigned long OVRE0 : 1;
06604         unsigned long OVRE1 : 1;
06605         unsigned long OVRE2 : 1;
06606         unsigned long OVRE3 : 1;
06607         unsigned long      : 4;
06608         unsigned long MACE : 1;
06609         unsigned long      : 19;
06610         unsigned long URE0 : 1;
06611         unsigned long URE1 : 1;
06612         unsigned long      : 2;
06613     #else
06614         unsigned long      : 2;
06615         unsigned long URE1 : 1;
06616         unsigned long URE0 : 1;
06617         unsigned long      : 19;
06618         unsigned long MACE : 1;
06619         unsigned long      : 4;
06620         unsigned long OVRE3 : 1;
06621         unsigned long OVRE2 : 1;
06622         unsigned long OVRE1 : 1;
06623         unsigned long OVRE0 : 1;
06624     #endif
06625     } BIT;
06626     } PRIPR;
06627     char          wk15[8];
06628     union {
06629         unsigned long LONG;
06630     struct {
06631
06632     #ifdef __RX_LITTLE_ENDIAN__
06633         unsigned long MACU : 24;
06634         unsigned long      : 8;
06635     #else
06636         unsigned long      : 8;
06637         unsigned long MACU : 24;
06638     #endif
06639     } BIT;
06640     } PRMACRU0;
06641     union {
06642         unsigned long LONG;
06643     struct {
06644
06645     #ifdef __RX_LITTLE_ENDIAN__
06646         unsigned long MACL : 24;
06647         unsigned long      : 8;
06648     #else
06649         unsigned long      : 8;
06650         unsigned long MACL : 24;
06651     #endif
06652     } BIT;
06653     } PRMACRL0;
06654     union {
06655         unsigned long LONG;
06656     struct {
06657
06658     #ifdef __RX_LITTLE_ENDIAN__
06659         unsigned long MACU : 24;
06660         unsigned long      : 8;
06661     #else
06662         unsigned long      : 8;
06663         unsigned long MACU : 24;
06664     #endif
06665     } BIT;
06666     } PRMACRU1;
06667     union {
06668         unsigned long LONG;
06669     struct {
06670
06671     #ifdef __RX_LITTLE_ENDIAN__
06672         unsigned long MACL : 24;
06673         unsigned long      : 8;

```

```

06674 #else
06675     unsigned long : 8;
06676     unsigned long MACL : 24;
06677 #endif
06678     } BIT;
06679     } PRMACRL1;
06680     union {
06681         unsigned long LONG;
06682         struct {
06683
06684 #ifdef __RX_LITTLE_ENDIAN__
06685         unsigned long TDIS : 2;
06686         unsigned long : 30;
06687 #else
06688         unsigned long : 30;
06689         unsigned long TDIS : 2;
06690 #endif
06691     } BIT;
06692     } TRNDISR;
06693     char wk16[12];
06694     union {
06695         unsigned long LONG;
06696         struct {
06697
06698 #ifdef __RX_LITTLE_ENDIAN__
06699         unsigned long MOD : 1;
06700         unsigned long : 7;
06701         unsigned long FWD0 : 1;
06702         unsigned long FWD1 : 1;
06703         unsigned long : 22;
06704 #else
06705         unsigned long : 22;
06706         unsigned long FWD1 : 1;
06707         unsigned long FWD0 : 1;
06708         unsigned long : 7;
06709         unsigned long MOD : 1;
06710 #endif
06711     } BIT;
06712     } TRNMR;
06713     union {
06714         unsigned long LONG;
06715         struct {
06716
06717 #ifdef __RX_LITTLE_ENDIAN__
06718         unsigned long THVAL : 11;
06719         unsigned long : 21;
06720 #else
06721         unsigned long : 21;
06722         unsigned long THVAL : 11;
06723 #endif
06724     } BIT;
06725     } TRNCTTDR;
06726 } st_eptpc_t;
06727
06728 typedef struct st_eptpc0 {
06729     unsigned long SYSR;
06730     union {
06731         unsigned long LONG;
06732         struct {
06733
06734 #ifdef __RX_LITTLE_ENDIAN__
06735         unsigned long OFMUD : 1;
06736         unsigned long INTCHG : 1;
06737         unsigned long MPDUD : 1;
06738         unsigned long : 1;
06739         unsigned long DRPTO : 1;
06740         unsigned long INTDEV : 1;
06741         unsigned long DRQOVR : 1;
06742         unsigned long : 5;
06743         unsigned long RECLP : 1;
06744         unsigned long : 1;
06745         unsigned long INFABT : 1;
06746         unsigned long : 1;
06747         unsigned long RESDN : 1;
06748         unsigned long GENDN : 1;
06749         unsigned long : 14;
06750 #else
06751         unsigned long : 14;
06752         unsigned long GENDN : 1;
06753         unsigned long RESDN : 1;
06754         unsigned long : 1;
06755         unsigned long INFABT : 1;
06756         unsigned long : 1;
06757         unsigned long RECLP : 1;
06758         unsigned long : 5;
06759         unsigned long DRQOVR : 1;
06760         unsigned long INTDEV : 1;

```

```

06761         unsigned long DRPTO : 1;
06762         unsigned long : 1;
06763         unsigned long MPDUD : 1;
06764         unsigned long INTCHG : 1;
06765         unsigned long OFMUD : 1;
06766     #endif
06767     } BIT;
06768     } SYIPR;
06769     char          wk0[8];
06770     union {
06771         unsigned long LONG;
06772         struct {
06773
06774     #ifdef __RX_LITTLE_ENDIAN__
06775         unsigned long MACU : 24;
06776         unsigned long : 8;
06777     #else
06778         unsigned long : 8;
06779         unsigned long MACU : 24;
06780     #endif
06781     } BIT;
06782     } SYMACRU;
06783     union {
06784         unsigned long LONG;
06785         struct {
06786
06787     #ifdef __RX_LITTLE_ENDIAN__
06788         unsigned long MACL : 24;
06789         unsigned long : 8;
06790     #else
06791         unsigned long : 8;
06792         unsigned long MACL : 24;
06793     #endif
06794     } BIT;
06795     } SYMACRL;
06796     unsigned long SYLLCCTLR;
06797     unsigned long SYIPADDRR;
06798     char          wk1[32];
06799     union {
06800         unsigned long LONG;
06801         struct {
06802
06803     #ifdef __RX_LITTLE_ENDIAN__
06804         unsigned long VER : 4;
06805         unsigned long TRSP : 4;
06806         unsigned long : 24;
06807     #else
06808         unsigned long : 24;
06809         unsigned long TRSP : 4;
06810         unsigned long VER : 4;
06811     #endif
06812     } BIT;
06813     } SYSPVRR;
06814     union {
06815         unsigned long LONG;
06816         struct {
06817
06818     #ifdef __RX_LITTLE_ENDIAN__
06819         unsigned long DNUM : 8;
06820         unsigned long : 24;
06821     #else
06822         unsigned long : 24;
06823         unsigned long DNUM : 8;
06824     #endif
06825     } BIT;
06826     } SYDOMR;
06827     char          wk2[8];
06828     union {
06829         unsigned long LONG;
06830         struct {
06831
06832     #ifdef __RX_LITTLE_ENDIAN__
06833         unsigned long FLAG0 : 1;
06834         unsigned long FLAG1 : 1;
06835         unsigned long FLAG2 : 1;
06836         unsigned long FLAG3 : 1;
06837         unsigned long FLAG4 : 1;
06838         unsigned long FLAG5 : 1;
06839         unsigned long : 2;
06840         unsigned long FLAG8 : 1;
06841         unsigned long : 1;
06842         unsigned long FLAG10 : 1;
06843         unsigned long : 2;
06844         unsigned long FLAG13 : 1;
06845         unsigned long FLAG14 : 1;
06846         unsigned long : 17;
06847     #else

```

```
06848         unsigned long : 17;
06849         unsigned long FLAG14 : 1;
06850         unsigned long FLAG13 : 1;
06851         unsigned long : 2;
06852         unsigned long FLAG10 : 1;
06853         unsigned long : 1;
06854         unsigned long FLAG8 : 1;
06855         unsigned long : 2;
06856         unsigned long FLAG5 : 1;
06857         unsigned long FLAG4 : 1;
06858         unsigned long FLAG3 : 1;
06859         unsigned long FLAG2 : 1;
06860         unsigned long FLAG1 : 1;
06861         unsigned long FLAG0 : 1;
06862     #endif
06863     } BIT;
06864     } ANFR;
06865     union {
06866         unsigned long LONG;
06867         struct {
06868
06869     #ifdef __RX_LITTLE_ENDIAN__
06870         unsigned long : 8;
06871         unsigned long FLAG8 : 1;
06872         unsigned long FLAG9 : 1;
06873         unsigned long FLAG10 : 1;
06874         unsigned long : 2;
06875         unsigned long FLAG13 : 1;
06876         unsigned long FLAG14 : 1;
06877         unsigned long : 17;
06878     #else
06879         unsigned long : 17;
06880         unsigned long FLAG14 : 1;
06881         unsigned long FLAG13 : 1;
06882         unsigned long : 2;
06883         unsigned long FLAG10 : 1;
06884         unsigned long FLAG9 : 1;
06885         unsigned long FLAG8 : 1;
06886         unsigned long : 8;
06887     #endif
06888     } BIT;
06889     } SYNFR;
06890     union {
06891         unsigned long LONG;
06892         struct {
06893
06894     #ifdef __RX_LITTLE_ENDIAN__
06895         unsigned long : 10;
06896         unsigned long FLAG10 : 1;
06897         unsigned long : 2;
06898         unsigned long FLAG13 : 1;
06899         unsigned long FLAG14 : 1;
06900         unsigned long : 17;
06901     #else
06902         unsigned long : 17;
06903         unsigned long FLAG14 : 1;
06904         unsigned long FLAG13 : 1;
06905         unsigned long : 2;
06906         unsigned long FLAG10 : 1;
06907         unsigned long : 10;
06908     #endif
06909     } BIT;
06910     } DYRQFR;
06911     union {
06912         unsigned long LONG;
06913         struct {
06914
06915     #ifdef __RX_LITTLE_ENDIAN__
06916         unsigned long : 8;
06917         unsigned long FLAG8 : 1;
06918         unsigned long FLAG9 : 1;
06919         unsigned long FLAG10 : 1;
06920         unsigned long : 2;
06921         unsigned long FLAG13 : 1;
06922         unsigned long FLAG14 : 1;
06923         unsigned long : 17;
06924     #else
06925         unsigned long : 17;
06926         unsigned long FLAG14 : 1;
06927         unsigned long FLAG13 : 1;
06928         unsigned long : 2;
06929         unsigned long FLAG10 : 1;
06930         unsigned long FLAG9 : 1;
06931         unsigned long FLAG8 : 1;
06932         unsigned long : 8;
06933     #endif
06934     } BIT;
```

```

06935     } DYRPFR;
06936     unsigned long  SYCIDRU;
06937     unsigned long  SYCIDRL;
06938     union {
06939         unsigned long LONG;
06940         struct {
06941
06942 #ifdef  __RX_LITTLE_ENDIAN__
06943         unsigned long PNUM : 16;
06944         unsigned long      : 16;
06945 #else
06946         unsigned long      : 16;
06947         unsigned long PNUM : 16;
06948 #endif
06949     } BIT;
06950     } SYPNUMR;
06951     char      wk3[20];
06952     union {
06953         unsigned long LONG;
06954         struct {
06955
06956 #ifdef  __RX_LITTLE_ENDIAN__
06957         unsigned long BMUP : 1;
06958         unsigned long STUP : 1;
06959         unsigned long ANUP : 1;
06960         unsigned long      : 29;
06961 #else
06962         unsigned long      : 29;
06963         unsigned long ANUP : 1;
06964         unsigned long STUP : 1;
06965         unsigned long BMUP : 1;
06966 #endif
06967     } BIT;
06968     } SYRVLDR;
06969     char      wk4[12];
06970     union {
06971         unsigned long LONG;
06972         struct {
06973
06974 #ifdef  __RX_LITTLE_ENDIAN__
06975         unsigned long ANCE : 2;
06976         unsigned long      : 2;
06977         unsigned long SYNC : 3;
06978         unsigned long      : 1;
06979         unsigned long FUP : 3;
06980         unsigned long      : 1;
06981         unsigned long DRQ : 3;
06982         unsigned long      : 1;
06983         unsigned long DRP : 3;
06984         unsigned long      : 1;
06985         unsigned long PDRQ : 3;
06986         unsigned long      : 1;
06987         unsigned long PDRP : 3;
06988         unsigned long      : 1;
06989         unsigned long PDFUP : 3;
06990         unsigned long      : 1;
06991 #else
06992         unsigned long      : 1;
06993         unsigned long PDFUP : 3;
06994         unsigned long      : 1;
06995         unsigned long PDRP : 3;
06996         unsigned long      : 1;
06997         unsigned long PDRQ : 3;
06998         unsigned long      : 1;
06999         unsigned long DRP : 3;
07000         unsigned long      : 1;
07001         unsigned long DRQ : 3;
07002         unsigned long      : 1;
07003         unsigned long FUP : 3;
07004         unsigned long      : 1;
07005         unsigned long SYNC : 3;
07006         unsigned long      : 2;
07007         unsigned long ANCE : 2;
07008 #endif
07009     } BIT;
07010     } SYRFL1R;
07011     union {
07012         unsigned long LONG;
07013         struct {
07014
07015 #ifdef  __RX_LITTLE_ENDIAN__
07016         unsigned long MAN : 2;
07017         unsigned long      : 2;
07018         unsigned long SIG : 2;
07019         unsigned long      : 22;
07020         unsigned long ILL : 2;
07021         unsigned long      : 2;

```

```

07022 #else
07023     unsigned long : 2;
07024     unsigned long ILL : 2;
07025     unsigned long : 22;
07026     unsigned long SIG : 2;
07027     unsigned long : 2;
07028     unsigned long MAN : 2;
07029 #endif
07030 } BIT;
07031 } SYRFL2R;
07032 union {
07033     unsigned long LONG;
07034     struct {
07035
07036 #ifdef __RX_LITTLE_ENDIAN__
07037         unsigned long ANCE : 1;
07038         unsigned long : 3;
07039         unsigned long SYNC : 1;
07040         unsigned long : 3;
07041         unsigned long DRQ : 1;
07042         unsigned long : 3;
07043         unsigned long PDRQ : 1;
07044         unsigned long : 19;
07045 #else
07046         unsigned long : 19;
07047         unsigned long PDRQ : 1;
07048         unsigned long : 3;
07049         unsigned long DRQ : 1;
07050         unsigned long : 3;
07051         unsigned long SYNC : 1;
07052         unsigned long : 3;
07053         unsigned long ANCE : 1;
07054 #endif
07055     } BIT;
07056     } SYTRENR;
07057     char wk5[4];
07058     unsigned long MTCIDU;
07059     unsigned long MTCIDL;
07060     union {
07061         unsigned long LONG;
07062         struct {
07063
07064 #ifdef __RX_LITTLE_ENDIAN__
07065         unsigned long PNUM : 16;
07066         unsigned long : 16;
07067 #else
07068         unsigned long : 16;
07069         unsigned long PNUM : 16;
07070 #endif
07071     } BIT;
07072     } MTPID;
07073     char wk6[20];
07074     union {
07075         unsigned long LONG;
07076         struct {
07077
07078 #ifdef __RX_LITTLE_ENDIAN__
07079         unsigned long ANCE : 8;
07080         unsigned long SYNC : 8;
07081         unsigned long DREQ : 8;
07082         unsigned long : 8;
07083 #else
07084         unsigned long : 8;
07085         unsigned long DREQ : 8;
07086         unsigned long SYNC : 8;
07087         unsigned long ANCE : 8;
07088 #endif
07089     } BIT;
07090     } SYTLIR;
07091     union {
07092         unsigned long LONG;
07093         struct {
07094
07095 #ifdef __RX_LITTLE_ENDIAN__
07096         unsigned long ANCE : 8;
07097         unsigned long SYNC : 8;
07098         unsigned long DRESP : 8;
07099         unsigned long : 8;
07100 #else
07101         unsigned long : 8;
07102         unsigned long DRESP : 8;
07103         unsigned long SYNC : 8;
07104         unsigned long ANCE : 8;
07105 #endif
07106     } BIT;
07107     } SYRLIR;
07108     unsigned long OFMRU;

```

```

07109 unsigned long OFMRL;
07110 unsigned long MPDRU;
07111 unsigned long MPDRL;
07112 char wk7[8];
07113 union {
07114     unsigned long LONG;
07115     struct {
07116
07117 #ifdef __RX_LITTLE_ENDIAN__
07118     unsigned long GMPR2 : 8;
07119     unsigned long : 8;
07120     unsigned long GMPR1 : 8;
07121     unsigned long : 8;
07122 #else
07123     unsigned long : 8;
07124     unsigned long GMPR1 : 8;
07125     unsigned long : 8;
07126     unsigned long GMPR2 : 8;
07127 #endif
07128     } BIT;
07129     } GMPR;
07130 unsigned long GMCQR;
07131 unsigned long GMIDRU;
07132 unsigned long GMIDRL;
07133 union {
07134     unsigned long LONG;
07135     struct {
07136
07137 #ifdef __RX_LITTLE_ENDIAN__
07138     unsigned long TSRC : 8;
07139     unsigned long : 8;
07140     unsigned long CUTO : 16;
07141 #else
07142     unsigned long CUTO : 16;
07143     unsigned long : 8;
07144     unsigned long TSRC : 8;
07145 #endif
07146     } BIT;
07147     } CUOTSR;
07148 union {
07149     unsigned long LONG;
07150     struct {
07151
07152 #ifdef __RX_LITTLE_ENDIAN__
07153     unsigned long SRMV : 16;
07154     unsigned long : 16;
07155 #else
07156     unsigned long : 16;
07157     unsigned long SRMV : 16;
07158 #endif
07159     } BIT;
07160     } SRR;
07161 char wk8[8];
07162 union {
07163     unsigned long LONG;
07164     struct {
07165
07166 #ifdef __RX_LITTLE_ENDIAN__
07167     unsigned long MACU : 24;
07168     unsigned long : 8;
07169 #else
07170     unsigned long : 8;
07171     unsigned long MACU : 24;
07172 #endif
07173     } BIT;
07174     } PPMACRU;
07175 union {
07176     unsigned long LONG;
07177     struct {
07178
07179 #ifdef __RX_LITTLE_ENDIAN__
07180     unsigned long MACL : 24;
07181     unsigned long : 8;
07182 #else
07183     unsigned long : 8;
07184     unsigned long MACL : 24;
07185 #endif
07186     } BIT;
07187     } PPMACRL;
07188 union {
07189     unsigned long LONG;
07190     struct {
07191
07192 #ifdef __RX_LITTLE_ENDIAN__
07193     unsigned long MACU : 24;
07194     unsigned long : 8;
07195 #else

```

```
07196         unsigned long : 8;
07197         unsigned long MACU : 24;
07198 #endif
07199     } BIT;
07200     } PDMACRU;
07201     union {
07202         unsigned long LONG;
07203         struct {
07204
07205 #ifdef __RX_LITTLE_ENDIAN__
07206         unsigned long MACL : 24;
07207         unsigned long : 8;
07208 #else
07209         unsigned long : 8;
07210         unsigned long MACL : 24;
07211 #endif
07212     } BIT;
07213     } PDMACRL;
07214     union {
07215         unsigned long LONG;
07216         struct {
07217
07218 #ifdef __RX_LITTLE_ENDIAN__
07219         unsigned long TYPE : 16;
07220         unsigned long : 16;
07221 #else
07222         unsigned long : 16;
07223         unsigned long TYPE : 16;
07224 #endif
07225     } BIT;
07226     } PETYPER;
07227     char        wk9[12];
07228     unsigned long PPIPR;
07229     unsigned long PDIPR;
07230     union {
07231         unsigned long LONG;
07232         struct {
07233
07234 #ifdef __RX_LITTLE_ENDIAN__
07235         unsigned long EVTO : 8;
07236         unsigned long : 24;
07237 #else
07238         unsigned long : 24;
07239         unsigned long EVTO : 8;
07240 #endif
07241     } BIT;
07242     } PETOSR;
07243     union {
07244         unsigned long LONG;
07245         struct {
07246
07247 #ifdef __RX_LITTLE_ENDIAN__
07248         unsigned long GETO : 8;
07249         unsigned long : 24;
07250 #else
07251         unsigned long : 24;
07252         unsigned long GETO : 8;
07253 #endif
07254     } BIT;
07255     } PGTO SR;
07256     union {
07257         unsigned long LONG;
07258         struct {
07259
07260 #ifdef __RX_LITTLE_ENDIAN__
07261         unsigned long PRTL : 8;
07262         unsigned long : 24;
07263 #else
07264         unsigned long : 24;
07265         unsigned long PRTL : 8;
07266 #endif
07267     } BIT;
07268     } PPTTLR;
07269     union {
07270         unsigned long LONG;
07271         struct {
07272
07273 #ifdef __RX_LITTLE_ENDIAN__
07274         unsigned long PDTL : 8;
07275         unsigned long : 24;
07276 #else
07277         unsigned long : 24;
07278         unsigned long PDTL : 8;
07279 #endif
07280     } BIT;
07281     } PDTTLR;
07282     union {
```

```

07283     unsigned long LONG;
07284     struct {
07285
07286 #ifdef __RX_LITTLE_ENDIAN__
07287     unsigned long EVUPT : 16;
07288     unsigned long : 16;
07289 #else
07290     unsigned long : 16;
07291     unsigned long EVUPT : 16;
07292 #endif
07293     } BIT;
07294     } PEUDPR;
07295     union {
07296     unsigned long LONG;
07297     struct {
07298
07299 #ifdef __RX_LITTLE_ENDIAN__
07300     unsigned long GEUPT : 16;
07301     unsigned long : 16;
07302 #else
07303     unsigned long : 16;
07304     unsigned long GEUPT : 16;
07305 #endif
07306     } BIT;
07307     } PGUDPR;
07308     union {
07309     unsigned long LONG;
07310     struct {
07311
07312 #ifdef __RX_LITTLE_ENDIAN__
07313     unsigned long SEL : 1;
07314     unsigned long PRT : 1;
07315     unsigned long ENB : 1;
07316     unsigned long : 13;
07317     unsigned long EXTPRM : 1;
07318     unsigned long : 15;
07319 #else
07320     unsigned long : 15;
07321     unsigned long EXTPRM : 1;
07322     unsigned long : 13;
07323     unsigned long ENB : 1;
07324     unsigned long PRT : 1;
07325     unsigned long SEL : 1;
07326 #endif
07327     } BIT;
07328     } FFLTR;
07329     char wk10[28];
07330     union {
07331     unsigned long LONG;
07332     struct {
07333
07334 #ifdef __RX_LITTLE_ENDIAN__
07335     unsigned long MACU : 24;
07336     unsigned long : 8;
07337 #else
07338     unsigned long : 8;
07339     unsigned long MACU : 24;
07340 #endif
07341     } BIT;
07342     } FMAC0RU;
07343     union {
07344     unsigned long LONG;
07345     struct {
07346
07347 #ifdef __RX_LITTLE_ENDIAN__
07348     unsigned long MACL : 24;
07349     unsigned long : 8;
07350 #else
07351     unsigned long : 8;
07352     unsigned long MACL : 24;
07353 #endif
07354     } BIT;
07355     } FMAC0RL;
07356     union {
07357     unsigned long LONG;
07358     struct {
07359
07360 #ifdef __RX_LITTLE_ENDIAN__
07361     unsigned long MACU : 24;
07362     unsigned long : 8;
07363 #else
07364     unsigned long : 8;
07365     unsigned long MACU : 24;
07366 #endif
07367     } BIT;
07368     } FMAC1RU;
07369     union {

```

```
07370     unsigned long LONG;
07371     struct {
07372
07373 #ifdef __RX_LITTLE_ENDIAN__
07374     unsigned long MACL : 24;
07375     unsigned long : 8;
07376 #else
07377     unsigned long : 8;
07378     unsigned long MACL : 24;
07379 #endif
07380     } BIT;
07381     } FMAC1RL;
07382     char wk11[80];
07383     union {
07384     unsigned long LONG;
07385     struct {
07386
07387 #ifdef __RX_LITTLE_ENDIAN__
07388     unsigned long ASYMU : 16;
07389     unsigned long : 16;
07390 #else
07391     unsigned long : 16;
07392     unsigned long ASYMU : 16;
07393 #endif
07394     } BIT;
07395     } DASYMRU;
07396     unsigned long DASYMRL;
07397     union {
07398     unsigned long LONG;
07399     struct {
07400
07401 #ifdef __RX_LITTLE_ENDIAN__
07402     unsigned long EGP : 16;
07403     unsigned long INGP : 16;
07404 #else
07405     unsigned long INGP : 16;
07406     unsigned long EGP : 16;
07407 #endif
07408     } BIT;
07409     } TSLATR;
07410     union {
07411     unsigned long LONG;
07412     struct {
07413
07414 #ifdef __RX_LITTLE_ENDIAN__
07415     unsigned long TCYC : 8;
07416     unsigned long : 4;
07417     unsigned long SBDIS : 1;
07418     unsigned long : 3;
07419     unsigned long FILDIS : 1;
07420     unsigned long : 3;
07421     unsigned long TCMOD : 1;
07422     unsigned long : 11;
07423 #else
07424     unsigned long : 11;
07425     unsigned long TCMOD : 1;
07426     unsigned long : 3;
07427     unsigned long FILDIS : 1;
07428     unsigned long : 3;
07429     unsigned long SBDIS : 1;
07430     unsigned long : 4;
07431     unsigned long TCYC : 8;
07432 #endif
07433     } BIT;
07434     } SYCONFR;
07435     union {
07436     unsigned long LONG;
07437     struct {
07438
07439 #ifdef __RX_LITTLE_ENDIAN__
07440     unsigned long FORM0 : 1;
07441     unsigned long FORM1 : 1;
07442     unsigned long : 30;
07443 #else
07444     unsigned long : 30;
07445     unsigned long FORM1 : 1;
07446     unsigned long FORM0 : 1;
07447 #endif
07448     } BIT;
07449     } SYFORMR;
07450     unsigned long RSTOUTR;
07451 } st_eptpc0_t;
07452
07453 typedef struct st_etherc {
07454     union {
07455     unsigned long LONG;
07456     struct {
```

```

07457
07458 #ifdef __RX_LITTLE_ENDIAN__
07459     unsigned long PRM : 1;
07460     unsigned long DM : 1;
07461     unsigned long RTM : 1;
07462     unsigned long ILB : 1;
07463     unsigned long : 1;
07464     unsigned long TE : 1;
07465     unsigned long RE : 1;
07466     unsigned long : 2;
07467     unsigned long MPDE : 1;
07468     unsigned long : 2;
07469     unsigned long PRCEF : 1;
07470     unsigned long : 3;
07471     unsigned long TXF : 1;
07472     unsigned long RXF : 1;
07473     unsigned long PFR : 1;
07474     unsigned long ZPF : 1;
07475     unsigned long TPC : 1;
07476     unsigned long : 11;
07477 #else
07478     unsigned long : 11;
07479     unsigned long TPC : 1;
07480     unsigned long ZPF : 1;
07481     unsigned long PFR : 1;
07482     unsigned long RXF : 1;
07483     unsigned long TXF : 1;
07484     unsigned long : 3;
07485     unsigned long PRCEF : 1;
07486     unsigned long : 2;
07487     unsigned long MPDE : 1;
07488     unsigned long : 2;
07489     unsigned long RE : 1;
07490     unsigned long TE : 1;
07491     unsigned long : 1;
07492     unsigned long ILB : 1;
07493     unsigned long RTM : 1;
07494     unsigned long DM : 1;
07495     unsigned long PRM : 1;
07496 #endif
07497 } BIT;
07498 } ECMR;
07499 char      wk0[4];
07500 union {
07501     unsigned long LONG;
07502     struct {
07503
07504 #ifdef __RX_LITTLE_ENDIAN__
07505         unsigned long RFL : 12;
07506         unsigned long : 20;
07507 #else
07508         unsigned long : 20;
07509         unsigned long RFL : 12;
07510 #endif
07511     } BIT;
07512     } RFLR;
07513 char      wk1[4];
07514 union {
07515     unsigned long LONG;
07516     struct {
07517
07518 #ifdef __RX_LITTLE_ENDIAN__
07519         unsigned long ICD : 1;
07520         unsigned long MPD : 1;
07521         unsigned long LCHNG : 1;
07522         unsigned long : 1;
07523         unsigned long PSRTO : 1;
07524         unsigned long BFR : 1;
07525         unsigned long : 26;
07526 #else
07527         unsigned long : 26;
07528         unsigned long BFR : 1;
07529         unsigned long PSRTO : 1;
07530         unsigned long : 1;
07531         unsigned long LCHNG : 1;
07532         unsigned long MPD : 1;
07533         unsigned long ICD : 1;
07534 #endif
07535     } BIT;
07536     } ECSR;
07537 char      wk2[4];
07538 union {
07539     unsigned long LONG;
07540     struct {
07541
07542 #ifdef __RX_LITTLE_ENDIAN__
07543         unsigned long ICDIP : 1;

```

```

07544         unsigned long MPDIP : 1;
07545         unsigned long LCHNGIP : 1;
07546         unsigned long : 1;
07547         unsigned long PSRTOIP : 1;
07548         unsigned long BFSIPR : 1;
07549         unsigned long : 26;
07550 #else
07551         unsigned long : 26;
07552         unsigned long BFSIPR : 1;
07553         unsigned long PSRTOIP : 1;
07554         unsigned long : 1;
07555         unsigned long LCHNGIP : 1;
07556         unsigned long MPDIP : 1;
07557         unsigned long ICDIP : 1;
07558 #endif
07559     } BIT;
07560     } ECSIPR;
07561     char        wk3[4];
07562     union {
07563         unsigned long LONG;
07564         struct {
07565
07566 #ifdef __RX_LITTLE_ENDIAN__
07567         unsigned long MDC : 1;
07568         unsigned long MMD : 1;
07569         unsigned long MDO : 1;
07570         unsigned long MDI : 1;
07571         unsigned long : 28;
07572 #else
07573         unsigned long : 28;
07574         unsigned long MDI : 1;
07575         unsigned long MDO : 1;
07576         unsigned long MMD : 1;
07577         unsigned long MDC : 1;
07578 #endif
07579     } BIT;
07580     } PIR;
07581     char        wk4[4];
07582     union {
07583         unsigned long LONG;
07584         struct {
07585
07586 #ifdef __RX_LITTLE_ENDIAN__
07587         unsigned long LMON : 1;
07588         unsigned long : 31;
07589 #else
07590         unsigned long : 31;
07591         unsigned long LMON : 1;
07592 #endif
07593     } BIT;
07594     } PSR;
07595     char        wk5[20];
07596     union {
07597         unsigned long LONG;
07598         struct {
07599
07600 #ifdef __RX_LITTLE_ENDIAN__
07601         unsigned long RMD : 20;
07602         unsigned long : 12;
07603 #else
07604         unsigned long : 12;
07605         unsigned long RMD : 20;
07606 #endif
07607     } BIT;
07608     } RDMLR;
07609     char        wk6[12];
07610     union {
07611         unsigned long LONG;
07612         struct {
07613
07614 #ifdef __RX_LITTLE_ENDIAN__
07615         unsigned long IPG : 5;
07616         unsigned long : 27;
07617 #else
07618         unsigned long : 27;
07619         unsigned long IPG : 5;
07620 #endif
07621     } BIT;
07622     } IPGR;
07623     union {
07624         unsigned long LONG;
07625         struct {
07626
07627 #ifdef __RX_LITTLE_ENDIAN__
07628         unsigned long AP : 16;
07629         unsigned long : 16;
07630 #else

```

```
07631         unsigned long : 16;
07632         unsigned long AP : 16;
07633 #endif
07634     } BIT;
07635     } APR;
07636     union {
07637         unsigned long LONG;
07638         struct {
07639
07640 #ifdef __RX_LITTLE_ENDIAN__
07641         unsigned long MP : 16;
07642         unsigned long : 16;
07643 #else
07644         unsigned long : 16;
07645         unsigned long MP : 16;
07646 #endif
07647     } BIT;
07648     } MPR;
07649     char        wk7[4];
07650     union {
07651         unsigned long LONG;
07652         struct {
07653
07654 #ifdef __RX_LITTLE_ENDIAN__
07655         unsigned long RPAUSE : 8;
07656         unsigned long : 24;
07657 #else
07658         unsigned long : 24;
07659         unsigned long RPAUSE : 8;
07660 #endif
07661     } BIT;
07662     } RFCF;
07663     union {
07664         unsigned long LONG;
07665         struct {
07666
07667 #ifdef __RX_LITTLE_ENDIAN__
07668         unsigned long TPAUSE : 16;
07669         unsigned long : 16;
07670 #else
07671         unsigned long : 16;
07672         unsigned long TPAUSE : 16;
07673 #endif
07674     } BIT;
07675     } TPAUSER;
07676     union {
07677         unsigned long LONG;
07678         struct {
07679
07680 #ifdef __RX_LITTLE_ENDIAN__
07681         unsigned long TXP : 8;
07682         unsigned long : 24;
07683 #else
07684         unsigned long : 24;
07685         unsigned long TXP : 8;
07686 #endif
07687     } BIT;
07688     } TPAUSECR;
07689     union {
07690         unsigned long LONG;
07691         struct {
07692
07693 #ifdef __RX_LITTLE_ENDIAN__
07694         unsigned long BCF : 16;
07695         unsigned long : 16;
07696 #else
07697         unsigned long : 16;
07698         unsigned long BCF : 16;
07699 #endif
07700     } BIT;
07701     } BCFRR;
07702     char        wk8[80];
07703     unsigned long MAHR;
07704     char        wk9[4];
07705     union {
07706         unsigned long LONG;
07707         struct {
07708
07709 #ifdef __RX_LITTLE_ENDIAN__
07710         unsigned long MA : 16;
07711         unsigned long : 16;
07712 #else
07713         unsigned long : 16;
07714         unsigned long MA : 16;
07715 #endif
07716     } BIT;
07717     } MALR;
```

```

07718     char          wk10[4];
07719     unsigned long   TROCR;
07720     unsigned long   CDCR;
07721     unsigned long   LCCR;
07722     unsigned long   CNDCR;
07723     char          wk11[4];
07724     unsigned long   CEFRCR;
07725     unsigned long   FRECR;
07726     unsigned long   TSFRRCR;
07727     unsigned long   TLFRCR;
07728     unsigned long   RFCR;
07729     unsigned long   MAFRCR;
07730 } st_etherc_t;
07731
07732 typedef struct st_exdmac {
07733     union {
07734         unsigned char BYTE;
07735         struct {
07736
07737 #ifdef __RX_LITTLE_ENDIAN__
07738         unsigned char DMST : 1;
07739         unsigned char : 7;
07740 #else
07741         unsigned char : 7;
07742         unsigned char DMST : 1;
07743 #endif
07744         } BIT;
07745         } EDMAST;
07746     char          wk0[479];
07747     unsigned long   CLSBR0;
07748     unsigned long   CLSBR1;
07749     unsigned long   CLSBR2;
07750     unsigned long   CLSBR3;
07751     unsigned long   CLSBR4;
07752     unsigned long   CLSBR5;
07753     unsigned long   CLSBR6;
07754     unsigned long   CLSBR7;
07755 } st_exdmac_t;
07756
07757 typedef struct st_exdmac0 {
07758     void          *EDMSAR;
07759     void          *EDMDAR;
07760     unsigned long   EDMCRA;
07761     unsigned short EDMCRB;
07762     char          wk0[2];
07763     union {
07764         unsigned short WORD;
07765         struct {
07766
07767 #ifdef __RX_LITTLE_ENDIAN__
07768         unsigned short DCTG : 2;
07769         unsigned short : 6;
07770         unsigned short SZ : 2;
07771         unsigned short : 2;
07772         unsigned short DTS : 2;
07773         unsigned short MD : 2;
07774 #else
07775         unsigned short MD : 2;
07776         unsigned short DTS : 2;
07777         unsigned short : 2;
07778         unsigned short SZ : 2;
07779         unsigned short : 6;
07780         unsigned short DCTG : 2;
07781 #endif
07782         } BIT;
07783         } EDMTMD;
07784     union {
07785         unsigned char BYTE;
07786         struct {
07787
07788 #ifdef __RX_LITTLE_ENDIAN__
07789         unsigned char DACKSEL : 1;
07790         unsigned char DACKW : 1;
07791         unsigned char DACKKE : 1;
07792         unsigned char DACKS : 1;
07793         unsigned char : 4;
07794 #else
07795         unsigned char : 4;
07796         unsigned char DACKS : 1;
07797         unsigned char DACKKE : 1;
07798         unsigned char DACKW : 1;
07799         unsigned char DACKSEL : 1;
07800 #endif
07801         } BIT;
07802         } EDMOMD;
07803     union {
07804         unsigned char BYTE;

```

```

07805     struct {
07806
07807 #ifdef __RX_LITTLE_ENDIAN__
07808     unsigned char DARIE : 1;
07809     unsigned char SARIE : 1;
07810     unsigned char RPTIE : 1;
07811     unsigned char ESIE : 1;
07812     unsigned char DTIE : 1;
07813     unsigned char : 3;
07814 #else
07815     unsigned char : 3;
07816     unsigned char DTIE : 1;
07817     unsigned char ESIE : 1;
07818     unsigned char RPTIE : 1;
07819     unsigned char SARIE : 1;
07820     unsigned char DARIE : 1;
07821 #endif
07822     } BIT;
07823     } EDMINT;
07824     union {
07825         unsigned long LONG;
07826         struct {
07827
07828 #ifdef __RX_LITTLE_ENDIAN__
07829         unsigned long DARA : 5;
07830         unsigned long : 1;
07831         unsigned long DM : 2;
07832         unsigned long SARA : 5;
07833         unsigned long : 1;
07834         unsigned long SM : 2;
07835         unsigned long DIR : 1;
07836         unsigned long AMS : 1;
07837         unsigned long : 14;
07838 #else
07839         unsigned long : 14;
07840         unsigned long AMS : 1;
07841         unsigned long DIR : 1;
07842         unsigned long SM : 2;
07843         unsigned long : 1;
07844         unsigned long SARA : 5;
07845         unsigned long DM : 2;
07846         unsigned long : 1;
07847         unsigned long DARA : 5;
07848 #endif
07849         } BIT;
07850         } EDMAMD;
07851         unsigned long EDMOFR;
07852         union {
07853             unsigned char BYTE;
07854             struct {
07855
07856 #ifdef __RX_LITTLE_ENDIAN__
07857             unsigned char DTE : 1;
07858             unsigned char : 7;
07859 #else
07860             unsigned char : 7;
07861             unsigned char DTE : 1;
07862 #endif
07863             } BIT;
07864             } EDMCNT;
07865             union {
07866                 unsigned char BYTE;
07867                 struct {
07868
07869 #ifdef __RX_LITTLE_ENDIAN__
07870                 unsigned char SWREQ : 1;
07871                 unsigned char : 3;
07872                 unsigned char CLRS : 1;
07873                 unsigned char : 3;
07874 #else
07875                 unsigned char : 3;
07876                 unsigned char CLRS : 1;
07877                 unsigned char : 3;
07878                 unsigned char SWREQ : 1;
07879 #endif
07880                 } BIT;
07881                 } EDMREQ;
07882                 union {
07883                     unsigned char BYTE;
07884                     struct {
07885
07886 #ifdef __RX_LITTLE_ENDIAN__
07887                     unsigned char ESIF : 1;
07888                     unsigned char : 3;
07889                     unsigned char DTIF : 1;
07890                     unsigned char : 2;
07891                     unsigned char ACT : 1;

```

```

07892 #else
07893     unsigned char ACT : 1;
07894     unsigned char  : 2;
07895     unsigned char DTIF : 1;
07896     unsigned char  : 3;
07897     unsigned char ESIF : 1;
07898 #endif
07899     } BIT;
07900     } EDMSTS;
07901     char      wk1[1];
07902     union {
07903         unsigned char BYTE;
07904         struct {
07905
07906 #ifdef __RX_LITTLE_ENDIAN__
07907         unsigned char DREQS : 2;
07908         unsigned char  : 6;
07909 #else
07910         unsigned char  : 6;
07911         unsigned char DREQS : 2;
07912 #endif
07913         } BIT;
07914         } EDMRMD;
07915         union {
07916             unsigned char BYTE;
07917             struct {
07918
07919 #ifdef __RX_LITTLE_ENDIAN__
07920             unsigned char EREQ : 1;
07921             unsigned char  : 7;
07922 #else
07923             unsigned char  : 7;
07924             unsigned char EREQ : 1;
07925 #endif
07926             } BIT;
07927             } EDMERF;
07928             union {
07929                 unsigned char BYTE;
07930                 struct {
07931
07932 #ifdef __RX_LITTLE_ENDIAN__
07933                 unsigned char PREQ : 1;
07934                 unsigned char  : 7;
07935 #else
07936                 unsigned char  : 7;
07937                 unsigned char PREQ : 1;
07938 #endif
07939                 } BIT;
07940                 } EDMPRF;
07941     } st_exdmac0_t;
07942
07943 typedef struct st_exdmac1 {
07944     void      *EDMSAR;
07945     void      *EDMDAR;
07946     unsigned long  EDMCRA;
07947     unsigned short EDMCRB;
07948     char      wk0[2];
07949     union {
07950         unsigned short WORD;
07951         struct {
07952
07953 #ifdef __RX_LITTLE_ENDIAN__
07954         unsigned short DCTG : 2;
07955         unsigned short  : 6;
07956         unsigned short SZ : 2;
07957         unsigned short  : 2;
07958         unsigned short DTS : 2;
07959         unsigned short MD : 2;
07960 #else
07961         unsigned short MD : 2;
07962         unsigned short DTS : 2;
07963         unsigned short  : 2;
07964         unsigned short SZ : 2;
07965         unsigned short  : 6;
07966         unsigned short DCTG : 2;
07967 #endif
07968         } BIT;
07969         } EDTMD;
07970         union {
07971             unsigned char BYTE;
07972             struct {
07973
07974 #ifdef __RX_LITTLE_ENDIAN__
07975             unsigned char DACKSEL : 1;
07976             unsigned char DACKW : 1;
07977             unsigned char DACK : 1;
07978             unsigned char DACKS : 1;

```

```

07979         unsigned char : 4;
07980 #else
07981         unsigned char : 4;
07982         unsigned char DACKS : 1;
07983         unsigned char DACKC : 1;
07984         unsigned char DACKW : 1;
07985         unsigned char DACKSEL : 1;
07986 #endif
07987     } BIT;
07988     } EDMOMD;
07989     union {
07990         unsigned char BYTE;
07991     struct {
07992
07993 #ifdef __RX_LITTLE_ENDIAN__
07994         unsigned char DARIE : 1;
07995         unsigned char SARIE : 1;
07996         unsigned char RPTIE : 1;
07997         unsigned char ESIE : 1;
07998         unsigned char DTIE : 1;
07999         unsigned char : 3;
08000 #else
08001         unsigned char : 3;
08002         unsigned char DTIE : 1;
08003         unsigned char ESIE : 1;
08004         unsigned char RPTIE : 1;
08005         unsigned char SARIE : 1;
08006         unsigned char DARIE : 1;
08007 #endif
08008     } BIT;
08009     } EDMINT;
08010     union {
08011         unsigned long LONG;
08012     struct {
08013
08014 #ifdef __RX_LITTLE_ENDIAN__
08015         unsigned long DARA : 5;
08016         unsigned long : 1;
08017         unsigned long DM : 2;
08018         unsigned long SARA : 5;
08019         unsigned long : 1;
08020         unsigned long SM : 2;
08021         unsigned long DIR : 1;
08022         unsigned long AMS : 1;
08023         unsigned long : 14;
08024 #else
08025         unsigned long : 14;
08026         unsigned long AMS : 1;
08027         unsigned long DIR : 1;
08028         unsigned long SM : 2;
08029         unsigned long : 1;
08030         unsigned long SARA : 5;
08031         unsigned long DM : 2;
08032         unsigned long : 1;
08033         unsigned long DARA : 5;
08034 #endif
08035     } BIT;
08036     } EDMAMD;
08037     char wk1[4];
08038     union {
08039         unsigned char BYTE;
08040     struct {
08041
08042 #ifdef __RX_LITTLE_ENDIAN__
08043         unsigned char DTE : 1;
08044         unsigned char : 7;
08045 #else
08046         unsigned char : 7;
08047         unsigned char DTE : 1;
08048 #endif
08049     } BIT;
08050     } EDMCNT;
08051     union {
08052         unsigned char BYTE;
08053     struct {
08054
08055 #ifdef __RX_LITTLE_ENDIAN__
08056         unsigned char SWREQ : 1;
08057         unsigned char : 3;
08058         unsigned char CLRS : 1;
08059         unsigned char : 3;
08060 #else
08061         unsigned char : 3;
08062         unsigned char CLRS : 1;
08063         unsigned char : 3;
08064         unsigned char SWREQ : 1;
08065 #endif
08066     }

```

```

08066     } BIT;
08067     } EDMREQ;
08068     union {
08069         unsigned char BYTE;
08070         struct {
08071
08072 #ifdef __RX_LITTLE_ENDIAN__
08073         unsigned char ESIF : 1;
08074         unsigned char : 3;
08075         unsigned char DTIF : 1;
08076         unsigned char : 2;
08077         unsigned char ACT : 1;
08078 #else
08079         unsigned char ACT : 1;
08080         unsigned char : 2;
08081         unsigned char DTIF : 1;
08082         unsigned char : 3;
08083         unsigned char ESIF : 1;
08084 #endif
08085     } BIT;
08086     } EDMSTS;
08087     char      wk2[1];
08088     union {
08089         unsigned char BYTE;
08090         struct {
08091
08092 #ifdef __RX_LITTLE_ENDIAN__
08093         unsigned char DREQS : 2;
08094         unsigned char : 6;
08095 #else
08096         unsigned char : 6;
08097         unsigned char DREQS : 2;
08098 #endif
08099     } BIT;
08100     } EDMRMD;
08101     union {
08102         unsigned char BYTE;
08103         struct {
08104
08105 #ifdef __RX_LITTLE_ENDIAN__
08106         unsigned char EREQ : 1;
08107         unsigned char : 7;
08108 #else
08109         unsigned char : 7;
08110         unsigned char EREQ : 1;
08111 #endif
08112     } BIT;
08113     } EDMERF;
08114     union {
08115         unsigned char BYTE;
08116         struct {
08117
08118 #ifdef __RX_LITTLE_ENDIAN__
08119         unsigned char PREQ : 1;
08120         unsigned char : 7;
08121 #else
08122         unsigned char : 7;
08123         unsigned char PREQ : 1;
08124 #endif
08125     } BIT;
08126     } EDMPRF;
08127 } st_exdmac1_t;
08128
08129 typedef struct st_flash {
08130     union {
08131         unsigned short WORD;
08132         struct {
08133
08134 #ifdef __RX_LITTLE_ENDIAN__
08135         unsigned short ROMCEN : 1;
08136         unsigned short : 15;
08137 #else
08138         unsigned short : 15;
08139         unsigned short ROMCEN : 1;
08140 #endif
08141     } BIT;
08142     } ROMCE;
08143     char      wk0[2];
08144     union {
08145         unsigned short WORD;
08146         struct {
08147
08148 #ifdef __RX_LITTLE_ENDIAN__
08149         unsigned short ROMCIV : 1;
08150         unsigned short : 15;
08151 #else
08152         unsigned short : 15;

```

```

08153         unsigned short ROMCIV : 1;
08154 #endif
08155     } BIT;
08156     } ROMCIV;
08157     char          wk1[58];
08158     unsigned long  NCRG0;
08159     union {
08160         unsigned long LONG;
08161         struct {
08162
08163 #ifdef __RX_LITTLE_ENDIAN__
08164         unsigned long  : 1;
08165         unsigned long  NC1E : 1;
08166         unsigned long  NC2E : 1;
08167         unsigned long  NC3E : 1;
08168         unsigned long  NCSZ : 17;
08169         unsigned long  : 11;
08170 #else
08171         unsigned long  : 11;
08172         unsigned long  NCSZ : 17;
08173         unsigned long  NC3E : 1;
08174         unsigned long  NC2E : 1;
08175         unsigned long  NC1E : 1;
08176         unsigned long  : 1;
08177 #endif
08178     } BIT;
08179     } NCRG0;
08180     unsigned long  NCRG1;
08181     union {
08182         unsigned long LONG;
08183         struct {
08184
08185 #ifdef __RX_LITTLE_ENDIAN__
08186         unsigned long  : 1;
08187         unsigned long  NC1E : 1;
08188         unsigned long  NC2E : 1;
08189         unsigned long  NC3E : 1;
08190         unsigned long  NCSZ : 17;
08191         unsigned long  : 11;
08192 #else
08193         unsigned long  : 11;
08194         unsigned long  NCSZ : 17;
08195         unsigned long  NC3E : 1;
08196         unsigned long  NC2E : 1;
08197         unsigned long  NC1E : 1;
08198         unsigned long  : 1;
08199 #endif
08200     } BIT;
08201     } NCRG1;
08202     char          wk2[45638];
08203     union {
08204         unsigned char BYTE;
08205         struct {
08206
08207 #ifdef __RX_LITTLE_ENDIAN__
08208         unsigned char FLWE : 2;
08209         unsigned char : 6;
08210 #else
08211         unsigned char : 6;
08212         unsigned char FLWE : 2;
08213 #endif
08214     } BIT;
08215     } FWEPROR;
08216     char          wk3[7798185];
08217     unsigned char EEPFCLK;
08218     char          wk4[8143];
08219     union {
08220         unsigned char BYTE;
08221         struct {
08222
08223 #ifdef __RX_LITTLE_ENDIAN__
08224         unsigned char : 3;
08225         unsigned char DFAE : 1;
08226         unsigned char CMDLK : 1;
08227         unsigned char : 2;
08228         unsigned char CFAE : 1;
08229 #else
08230         unsigned char CFAE : 1;
08231         unsigned char : 2;
08232         unsigned char CMDLK : 1;
08233         unsigned char DFAE : 1;
08234         unsigned char : 3;
08235 #endif
08236     } BIT;
08237     } FASTAT;
08238     char          wk5[3];
08239     union {

```

```

08240     unsigned char BYTE;
08241     struct {
08242
08243 #ifdef __RX_LITTLE_ENDIAN__
08244     unsigned char : 3;
08245     unsigned char DFAEIE : 1;
08246     unsigned char CMDLKIE : 1;
08247     unsigned char : 2;
08248     unsigned char CFAEIE : 1;
08249 #else
08250     unsigned char CFAEIE : 1;
08251     unsigned char : 2;
08252     unsigned char CMDLKIE : 1;
08253     unsigned char DFAEIE : 1;
08254     unsigned char : 3;
08255 #endif
08256     } BIT;
08257     } FAEINT;
08258     char      wk6[3];
08259     union {
08260     unsigned char BYTE;
08261     struct {
08262
08263 #ifdef __RX_LITTLE_ENDIAN__
08264     unsigned char FRDYIE : 1;
08265     unsigned char : 7;
08266 #else
08267     unsigned char : 7;
08268     unsigned char FRDYIE : 1;
08269 #endif
08270     } BIT;
08271     } FRDYIE;
08272     char      wk7[23];
08273     union {
08274     unsigned long LONG;
08275     struct {
08276
08277 #ifdef __RX_LITTLE_ENDIAN__
08278     unsigned long FSADDR : 32;
08279 #else
08280     unsigned long FSADDR : 32;
08281 #endif
08282     } BIT;
08283     } FSADDR;
08284     union {
08285     unsigned long LONG;
08286     struct {
08287
08288 #ifdef __RX_LITTLE_ENDIAN__
08289     unsigned long FEADDR : 32;
08290 #else
08291     unsigned long FEADDR : 32;
08292 #endif
08293     } BIT;
08294     } FEADDR;
08295     char      wk8[72];
08296     union {
08297     unsigned long LONG;
08298     struct {
08299
08300 #ifdef __RX_LITTLE_ENDIAN__
08301     unsigned long : 6;
08302     unsigned long FLWEERR : 1;
08303     unsigned long : 1;
08304     unsigned long PRGSPD : 1;
08305     unsigned long ERSSPD : 1;
08306     unsigned long DBFULL : 1;
08307     unsigned long SUSRDY : 1;
08308     unsigned long PRGERR : 1;
08309     unsigned long ERSERR : 1;
08310     unsigned long ILGLERR : 1;
08311     unsigned long FRDY : 1;
08312     unsigned long : 4;
08313     unsigned long OTERR : 1;
08314     unsigned long SECERR : 1;
08315     unsigned long FESETERR : 1;
08316     unsigned long ILGCOMERR : 1;
08317     unsigned long : 8;
08318 #else
08319     unsigned long : 8;
08320     unsigned long ILGCOMERR : 1;
08321     unsigned long FESETERR : 1;
08322     unsigned long SECERR : 1;
08323     unsigned long OTERR : 1;
08324     unsigned long : 4;
08325     unsigned long FRDY : 1;
08326     unsigned long ILGLERR : 1;

```

```

08327         unsigned long ERSERR : 1;
08328         unsigned long PRGERR : 1;
08329         unsigned long SUSRDY : 1;
08330         unsigned long DBFULL : 1;
08331         unsigned long ERSSPD : 1;
08332         unsigned long PRGSPD : 1;
08333         unsigned long      : 1;
08334         unsigned long FLWEERR : 1;
08335         unsigned long      : 6;
08336     #endif
08337     } BIT;
08338     } FSTATR;
08339     union {
08340         unsigned short WORD;
08341         struct {
08342
08343     #ifdef __RX_LITTLE_ENDIAN__
08344         unsigned short FENTRYC : 1;
08345         unsigned short      : 6;
08346         unsigned short FENTRYD : 1;
08347         unsigned short KEY : 8;
08348     #else
08349         unsigned short KEY : 8;
08350         unsigned short FENTRYD : 1;
08351         unsigned short      : 6;
08352         unsigned short FENTRYC : 1;
08353     #endif
08354     } BIT;
08355     } FENTRYR;
08356     char      wk9[6];
08357     union {
08358         unsigned short WORD;
08359         struct {
08360
08361     #ifdef __RX_LITTLE_ENDIAN__
08362         unsigned short SUINIT : 1;
08363         unsigned short      : 7;
08364         unsigned short KEY : 8;
08365     #else
08366         unsigned short KEY : 8;
08367         unsigned short      : 7;
08368         unsigned short SUINIT : 1;
08369     #endif
08370     } BIT;
08371     } FSUINITR;
08372     char      wk10[18];
08373     union {
08374         unsigned short WORD;
08375         struct {
08376
08377     #ifdef __RX_LITTLE_ENDIAN__
08378         unsigned short PCMDR : 8;
08379         unsigned short CMDR : 8;
08380     #else
08381         unsigned short CMDR : 8;
08382         unsigned short PCMDR : 8;
08383     #endif
08384     } BIT;
08385     } FCMRDR;
08386     char      wk11[46];
08387     union {
08388         unsigned char BYTE;
08389         struct {
08390
08391     #ifdef __RX_LITTLE_ENDIAN__
08392         unsigned char BCDIR : 1;
08393         unsigned char      : 7;
08394     #else
08395         unsigned char      : 7;
08396         unsigned char BCDIR : 1;
08397     #endif
08398     } BIT;
08399     } FBCCNT;
08400     char      wk12[3];
08401     union {
08402         unsigned char BYTE;
08403         struct {
08404
08405     #ifdef __RX_LITTLE_ENDIAN__
08406         unsigned char BCST : 1;
08407         unsigned char      : 7;
08408     #else
08409         unsigned char      : 7;
08410         unsigned char BCST : 1;
08411     #endif
08412     } BIT;
08413     } FBCSTAT;

```

```

08414     char            wk13[3];
08415     union {
08416         unsigned long LONG;
08417         struct {
08418
08419 #ifdef __RX_LITTLE_ENDIAN__
08420         unsigned long PSADR : 17;
08421         unsigned long      : 15;
08422 #else
08423         unsigned long      : 15;
08424         unsigned long PSADR : 17;
08425 #endif
08426     } BIT;
08427     } FPSADDR;
08428     union {
08429         unsigned long LONG;
08430         struct {
08431
08432 #ifdef __RX_LITTLE_ENDIAN__
08433         unsigned long FAWS : 12;
08434         unsigned long      : 3;
08435         unsigned long FSPR : 1;
08436         unsigned long FAWE : 12;
08437         unsigned long      : 3;
08438         unsigned long BTFLG : 1;
08439 #else
08440         unsigned long BTFLG : 1;
08441         unsigned long      : 3;
08442         unsigned long FAWE : 12;
08443         unsigned long FSPR : 1;
08444         unsigned long      : 3;
08445         unsigned long FAWS : 12;
08446 #endif
08447     } BIT;
08448     } FAWMON;
08449     union {
08450         unsigned short WORD;
08451         struct {
08452
08453 #ifdef __RX_LITTLE_ENDIAN__
08454         unsigned short ESUSPMD : 1;
08455         unsigned short      : 15;
08456 #else
08457         unsigned short      : 15;
08458         unsigned short ESUSPMD : 1;
08459 #endif
08460     } BIT;
08461     } FCPSR;
08462     char            wk14[2];
08463     union {
08464         unsigned short WORD;
08465         struct {
08466
08467 #ifdef __RX_LITTLE_ENDIAN__
08468         unsigned short PCKA : 8;
08469         unsigned short KEY : 8;
08470 #else
08471         unsigned short KEY : 8;
08472         unsigned short PCKA : 8;
08473 #endif
08474     } BIT;
08475     } FPCKAR;
08476     char            wk15[2];
08477     union {
08478         unsigned short WORD;
08479         struct {
08480
08481 #ifdef __RX_LITTLE_ENDIAN__
08482         unsigned short SAS : 2;
08483         unsigned short      : 6;
08484         unsigned short KEY : 8;
08485 #else
08486         unsigned short KEY : 8;
08487         unsigned short      : 6;
08488         unsigned short SAS : 2;
08489 #endif
08490     } BIT;
08491     } FSUACR;
08492 } st_flash_t;
08493
08494 typedef struct st_glcdc {
08495     union {
08496         unsigned long LONG;
08497         struct {
08498
08499 #ifdef __RX_LITTLE_ENDIAN__
08500         unsigned long B : 8;

```

```
08501         unsigned long G : 8;
08502         unsigned long R : 8;
08503         unsigned long A : 8;
08504 #else
08505         unsigned long A : 8;
08506         unsigned long R : 8;
08507         unsigned long G : 8;
08508         unsigned long B : 8;
08509 #endif
08510     } BIT;
08511     } GR1CLUT0[256];
08512     union {
08513         unsigned long LONG;
08514         struct {
08515
08516 #ifdef __RX_LITTLE_ENDIAN__
08517         unsigned long B : 8;
08518         unsigned long G : 8;
08519         unsigned long R : 8;
08520         unsigned long A : 8;
08521 #else
08522         unsigned long A : 8;
08523         unsigned long R : 8;
08524         unsigned long G : 8;
08525         unsigned long B : 8;
08526 #endif
08527     } BIT;
08528     } GR1CLUT1[256];
08529     union {
08530         unsigned long LONG;
08531         struct {
08532
08533 #ifdef __RX_LITTLE_ENDIAN__
08534         unsigned long B : 8;
08535         unsigned long G : 8;
08536         unsigned long R : 8;
08537         unsigned long A : 8;
08538 #else
08539         unsigned long A : 8;
08540         unsigned long R : 8;
08541         unsigned long G : 8;
08542         unsigned long B : 8;
08543 #endif
08544     } BIT;
08545     } GR2CLUT0[256];
08546     union {
08547         unsigned long LONG;
08548         struct {
08549
08550 #ifdef __RX_LITTLE_ENDIAN__
08551         unsigned long B : 8;
08552         unsigned long G : 8;
08553         unsigned long R : 8;
08554         unsigned long A : 8;
08555 #else
08556         unsigned long A : 8;
08557         unsigned long R : 8;
08558         unsigned long G : 8;
08559         unsigned long B : 8;
08560 #endif
08561     } BIT;
08562     } GR2CLUT1[256];
08563     union {
08564         unsigned long LONG;
08565         struct {
08566
08567 #ifdef __RX_LITTLE_ENDIAN__
08568         unsigned long EN : 1;
08569         unsigned long : 7;
08570         unsigned long VEN : 1;
08571         unsigned long : 7;
08572         unsigned long SWRST : 1;
08573         unsigned long : 15;
08574 #else
08575         unsigned long : 15;
08576         unsigned long SWRST : 1;
08577         unsigned long : 7;
08578         unsigned long VEN : 1;
08579         unsigned long : 7;
08580         unsigned long EN : 1;
08581 #endif
08582     } BIT;
08583     } BGEN;
08584     union {
08585         unsigned long LONG;
08586         struct {
08587
```

```
08588 #ifdef __RX_LITTLE_ENDIAN__
08589     unsigned long FH : 11;
08590     unsigned long : 5;
08591     unsigned long FV : 11;
08592     unsigned long : 5;
08593 #else
08594     unsigned long : 5;
08595     unsigned long FV : 11;
08596     unsigned long : 5;
08597     unsigned long FH : 11;
08598 #endif
08599 } BIT;
08600 } BGPERI;
08601 union {
08602     unsigned long LONG;
08603     struct {
08604
08605 #ifdef __RX_LITTLE_ENDIAN__
08606     unsigned long HP : 4;
08607     unsigned long : 12;
08608     unsigned long VP : 4;
08609     unsigned long : 12;
08610 #else
08611     unsigned long : 12;
08612     unsigned long VP : 4;
08613     unsigned long : 12;
08614     unsigned long HP : 4;
08615 #endif
08616 } BIT;
08617 } BGSYNC;
08618 union {
08619     unsigned long LONG;
08620     struct {
08621
08622 #ifdef __RX_LITTLE_ENDIAN__
08623     unsigned long VW : 11;
08624     unsigned long : 5;
08625     unsigned long VP : 11;
08626     unsigned long : 5;
08627 #else
08628     unsigned long : 5;
08629     unsigned long VP : 11;
08630     unsigned long : 5;
08631     unsigned long VW : 11;
08632 #endif
08633 } BIT;
08634 } BGVSIZ;
08635 union {
08636     unsigned long LONG;
08637     struct {
08638
08639 #ifdef __RX_LITTLE_ENDIAN__
08640     unsigned long HW : 11;
08641     unsigned long : 5;
08642     unsigned long HP : 11;
08643     unsigned long : 5;
08644 #else
08645     unsigned long : 5;
08646     unsigned long HP : 11;
08647     unsigned long : 5;
08648     unsigned long HW : 11;
08649 #endif
08650 } BIT;
08651 } BGHSIZ;
08652 union {
08653     unsigned long LONG;
08654     struct {
08655
08656 #ifdef __RX_LITTLE_ENDIAN__
08657     unsigned long B : 8;
08658     unsigned long G : 8;
08659     unsigned long R : 8;
08660     unsigned long : 8;
08661 #else
08662     unsigned long : 8;
08663     unsigned long R : 8;
08664     unsigned long G : 8;
08665     unsigned long B : 8;
08666 #endif
08667 } BIT;
08668 } BGCOLOR;
08669 union {
08670     unsigned long LONG;
08671     struct {
08672
08673 #ifdef __RX_LITTLE_ENDIAN__
08674     unsigned long EN : 1;
```

```

08675         unsigned long : 7;
08676         unsigned long VEN : 1;
08677         unsigned long : 7;
08678         unsigned long SWRST : 1;
08679         unsigned long : 15;
08680 #else
08681         unsigned long : 15;
08682         unsigned long SWRST : 1;
08683         unsigned long : 7;
08684         unsigned long VEN : 1;
08685         unsigned long : 7;
08686         unsigned long EN : 1;
08687 #endif
08688     } BIT;
08689     } BGMON;
08690     char        wk0[228];
08691     union {
08692         unsigned long LONG;
08693         struct {
08694
08695 #ifdef __RX_LITTLE_ENDIAN__
08696         unsigned long VEN : 1;
08697         unsigned long : 31;
08698 #else
08699         unsigned long : 31;
08700         unsigned long VEN : 1;
08701 #endif
08702     } BIT;
08703     } GR1VEN;
08704     union {
08705         unsigned long LONG;
08706         struct {
08707
08708 #ifdef __RX_LITTLE_ENDIAN__
08709         unsigned long RENB : 1;
08710         unsigned long : 31;
08711 #else
08712         unsigned long : 31;
08713         unsigned long RENB : 1;
08714 #endif
08715     } BIT;
08716     } GR1FLMRD;
08717     char        wk1[4];
08718     unsigned long GR1FLM2;
08719     union {
08720         unsigned long LONG;
08721         struct {
08722
08723 #ifdef __RX_LITTLE_ENDIAN__
08724         unsigned long : 16;
08725         unsigned long LNOFF : 16;
08726 #else
08727         unsigned long LNOFF : 16;
08728         unsigned long : 16;
08729 #endif
08730     } BIT;
08731     } GR1FLM3;
08732     char        wk2[4];
08733     union {
08734         unsigned long LONG;
08735         struct {
08736
08737 #ifdef __RX_LITTLE_ENDIAN__
08738         unsigned long DATANUM : 16;
08739         unsigned long LNNUM : 11;
08740         unsigned long : 5;
08741 #else
08742         unsigned long : 5;
08743         unsigned long LNNUM : 11;
08744         unsigned long DATANUM : 16;
08745 #endif
08746     } BIT;
08747     } GR1FLM5;
08748     union {
08749         unsigned long LONG;
08750         struct {
08751
08752 #ifdef __RX_LITTLE_ENDIAN__
08753         unsigned long : 28;
08754         unsigned long FORMAT : 3;
08755         unsigned long : 1;
08756 #else
08757         unsigned long : 1;
08758         unsigned long FORMAT : 3;
08759         unsigned long : 28;
08760 #endif
08761     } BIT;

```

```
08762     } GR1FLM6;
08763     union {
08764         unsigned long LONG;
08765         struct {
08766
08767 #ifdef __RX_LITTLE_ENDIAN__
08768         unsigned long DISPSEL : 2;
08769         unsigned long : 2;
08770         unsigned long GRCDISPON : 1;
08771         unsigned long : 3;
08772         unsigned long ARCDISPON : 1;
08773         unsigned long : 3;
08774         unsigned long ARCON : 1;
08775         unsigned long : 19;
08776 #else
08777         unsigned long : 19;
08778         unsigned long ARCON : 1;
08779         unsigned long : 3;
08780         unsigned long ARCDISPON : 1;
08781         unsigned long : 3;
08782         unsigned long GRCDISPON : 1;
08783         unsigned long : 2;
08784         unsigned long DISPSEL : 2;
08785 #endif
08786     } BIT;
08787     } GR1AB1;
08788     union {
08789         unsigned long LONG;
08790         struct {
08791
08792 #ifdef __RX_LITTLE_ENDIAN__
08793         unsigned long GRCVW : 11;
08794         unsigned long : 5;
08795         unsigned long GRCVS : 11;
08796         unsigned long : 5;
08797 #else
08798         unsigned long : 5;
08799         unsigned long GRCVS : 11;
08800         unsigned long : 5;
08801         unsigned long GRCVW : 11;
08802 #endif
08803     } BIT;
08804     } GR1AB2;
08805     union {
08806         unsigned long LONG;
08807         struct {
08808
08809 #ifdef __RX_LITTLE_ENDIAN__
08810         unsigned long GRCHW : 11;
08811         unsigned long : 5;
08812         unsigned long GRCHS : 11;
08813         unsigned long : 5;
08814 #else
08815         unsigned long : 5;
08816         unsigned long GRCHS : 11;
08817         unsigned long : 5;
08818         unsigned long GRCHW : 11;
08819 #endif
08820     } BIT;
08821     } GR1AB3;
08822     union {
08823         unsigned long LONG;
08824         struct {
08825
08826 #ifdef __RX_LITTLE_ENDIAN__
08827         unsigned long ARCVW : 11;
08828         unsigned long : 5;
08829         unsigned long ARCVS : 11;
08830         unsigned long : 5;
08831 #else
08832         unsigned long : 5;
08833         unsigned long ARCVS : 11;
08834         unsigned long : 5;
08835         unsigned long ARCVW : 11;
08836 #endif
08837     } BIT;
08838     } GR1AB4;
08839     union {
08840         unsigned long LONG;
08841         struct {
08842
08843 #ifdef __RX_LITTLE_ENDIAN__
08844         unsigned long ARCHW : 11;
08845         unsigned long : 5;
08846         unsigned long ARCHS : 11;
08847         unsigned long : 5;
08848 #else
```

```

08849         unsigned long : 5;
08850         unsigned long ARCHS : 11;
08851         unsigned long : 5;
08852         unsigned long ARCHW : 11;
08853     #endif
08854     } BIT;
08855     } GR1AB5;
08856     union {
08857         unsigned long LONG;
08858         struct {
08859
08860     #ifdef __RX_LITTLE_ENDIAN__
08861         unsigned long ARCRATE : 8;
08862         unsigned long : 8;
08863         unsigned long ARCCOEF : 9;
08864         unsigned long : 7;
08865     #else
08866         unsigned long : 7;
08867         unsigned long ARCCOEF : 9;
08868         unsigned long : 8;
08869         unsigned long ARCRATE : 8;
08870     #endif
08871     } BIT;
08872     } GR1AB6;
08873     union {
08874         unsigned long LONG;
08875         struct {
08876
08877     #ifdef __RX_LITTLE_ENDIAN__
08878         unsigned long CKON : 1;
08879         unsigned long : 15;
08880         unsigned long ARCADEF : 8;
08881         unsigned long : 8;
08882     #else
08883         unsigned long : 8;
08884         unsigned long ARCADEF : 8;
08885         unsigned long : 15;
08886         unsigned long CKON : 1;
08887     #endif
08888     } BIT;
08889     } GR1AB7;
08890     union {
08891         unsigned long LONG;
08892         struct {
08893
08894     #ifdef __RX_LITTLE_ENDIAN__
08895         unsigned long CKKR : 8;
08896         unsigned long CKKB : 8;
08897         unsigned long CKKG : 8;
08898         unsigned long : 8;
08899     #else
08900         unsigned long : 8;
08901         unsigned long CKKG : 8;
08902         unsigned long CKKB : 8;
08903         unsigned long CKKR : 8;
08904     #endif
08905     } BIT;
08906     } GR1AB8;
08907     union {
08908         unsigned long LONG;
08909         struct {
08910
08911     #ifdef __RX_LITTLE_ENDIAN__
08912         unsigned long CKR : 8;
08913         unsigned long CKB : 8;
08914         unsigned long CKG : 8;
08915         unsigned long CKA : 8;
08916     #else
08917         unsigned long CKA : 8;
08918         unsigned long CKG : 8;
08919         unsigned long CKB : 8;
08920         unsigned long CKR : 8;
08921     #endif
08922     } BIT;
08923     } GR1AB9;
08924     char          wk3[8];
08925     union {
08926         unsigned long LONG;
08927         struct {
08928
08929     #ifdef __RX_LITTLE_ENDIAN__
08930         unsigned long R : 8;
08931         unsigned long B : 8;
08932         unsigned long G : 8;
08933         unsigned long : 8;
08934     #else
08935         unsigned long : 8;

```

```
08936         unsigned long G : 8;
08937         unsigned long B : 8;
08938         unsigned long R : 8;
08939 #endif
08940     } BIT;
08941     } GRIBASE;
08942     union {
08943         unsigned long LONG;
08944         struct {
08945
08946 #ifdef __RX_LITTLE_ENDIAN__
08947         unsigned long LINE : 11;
08948         unsigned long : 5;
08949         unsigned long SEL : 1;
08950         unsigned long : 15;
08951 #else
08952         unsigned long : 15;
08953         unsigned long SEL : 1;
08954         unsigned long : 5;
08955         unsigned long LINE : 11;
08956 #endif
08957     } BIT;
08958     } GR1CLUTINT;
08959     union {
08960         unsigned long LONG;
08961         struct {
08962
08963 #ifdef __RX_LITTLE_ENDIAN__
08964         unsigned long ARCST : 1;
08965         unsigned long : 15;
08966         unsigned long UFST : 1;
08967         unsigned long : 15;
08968 #else
08969         unsigned long : 15;
08970         unsigned long UFST : 1;
08971         unsigned long : 15;
08972         unsigned long ARCST : 1;
08973 #endif
08974     } BIT;
08975     } GR1MON;
08976     char          wk4[168];
08977     union {
08978         unsigned long LONG;
08979         struct {
08980
08981 #ifdef __RX_LITTLE_ENDIAN__
08982         unsigned long VEN : 1;
08983         unsigned long : 31;
08984 #else
08985         unsigned long : 31;
08986         unsigned long VEN : 1;
08987 #endif
08988     } BIT;
08989     } GR2VEN;
08990     union {
08991         unsigned long LONG;
08992         struct {
08993
08994 #ifdef __RX_LITTLE_ENDIAN__
08995         unsigned long RENB : 1;
08996         unsigned long : 31;
08997 #else
08998         unsigned long : 31;
08999         unsigned long RENB : 1;
09000 #endif
09001     } BIT;
09002     } GR2FLMRD;
09003     char          wk5[4];
09004     unsigned long GR2FLM2;
09005     union {
09006         unsigned long LONG;
09007         struct {
09008
09009 #ifdef __RX_LITTLE_ENDIAN__
09010         unsigned long : 16;
09011         unsigned long LNOFF : 16;
09012 #else
09013         unsigned long LNOFF : 16;
09014         unsigned long : 16;
09015 #endif
09016     } BIT;
09017     } GR2FLM3;
09018     char          wk6[4];
09019     union {
09020         unsigned long LONG;
09021         struct {
09022
```

```
09023 #ifdef __RX_LITTLE_ENDIAN__
09024     unsigned long DATANUM : 16;
09025     unsigned long LNNUM : 11;
09026     unsigned long : 5;
09027 #else
09028     unsigned long : 5;
09029     unsigned long LNNUM : 11;
09030     unsigned long DATANUM : 16;
09031 #endif
09032 } BIT;
09033 } GR2FLM5;
09034 union {
09035     unsigned long LONG;
09036     struct {
09037
09038 #ifdef __RX_LITTLE_ENDIAN__
09039     unsigned long : 28;
09040     unsigned long FORMAT : 3;
09041     unsigned long : 1;
09042 #else
09043     unsigned long : 1;
09044     unsigned long FORMAT : 3;
09045     unsigned long : 28;
09046 #endif
09047     } BIT;
09048     } GR2FLM6;
09049     union {
09050         unsigned long LONG;
09051         struct {
09052
09053 #ifdef __RX_LITTLE_ENDIAN__
09054         unsigned long DISPSEL : 2;
09055         unsigned long : 2;
09056         unsigned long GRCDISPON : 1;
09057         unsigned long : 3;
09058         unsigned long ARCDISPON : 1;
09059         unsigned long : 3;
09060         unsigned long ARCON : 1;
09061         unsigned long : 19;
09062 #else
09063         unsigned long : 19;
09064         unsigned long ARCON : 1;
09065         unsigned long : 3;
09066         unsigned long ARCDISPON : 1;
09067         unsigned long : 3;
09068         unsigned long GRCDISPON : 1;
09069         unsigned long : 2;
09070         unsigned long DISPSEL : 2;
09071 #endif
09072         } BIT;
09073         } GR2AB1;
09074         union {
09075             unsigned long LONG;
09076             struct {
09077
09078 #ifdef __RX_LITTLE_ENDIAN__
09079             unsigned long GRCVW : 11;
09080             unsigned long : 5;
09081             unsigned long GRCVS : 11;
09082             unsigned long : 5;
09083 #else
09084             unsigned long : 5;
09085             unsigned long GRCVS : 11;
09086             unsigned long : 5;
09087             unsigned long GRCVW : 11;
09088 #endif
09089             } BIT;
09090             } GR2AB2;
09091             union {
09092                 unsigned long LONG;
09093                 struct {
09094
09095 #ifdef __RX_LITTLE_ENDIAN__
09096                 unsigned long GRCHW : 11;
09097                 unsigned long : 5;
09098                 unsigned long GRCHS : 11;
09099                 unsigned long : 5;
09100 #else
09101                 unsigned long : 5;
09102                 unsigned long GRCHS : 11;
09103                 unsigned long : 5;
09104                 unsigned long GRCHW : 11;
09105 #endif
09106                 } BIT;
09107                 } GR2AB3;
09108                 union {
09109                     unsigned long LONG;
```

```

09110     struct {
09111
09112 #ifdef __RX_LITTLE_ENDIAN__
09113     unsigned long ARCVW : 11;
09114     unsigned long  : 5;
09115     unsigned long ARCVS : 11;
09116     unsigned long  : 5;
09117 #else
09118     unsigned long  : 5;
09119     unsigned long ARCVS : 11;
09120     unsigned long  : 5;
09121     unsigned long ARCVW : 11;
09122 #endif
09123     } BIT;
09124     } GR2AB4;
09125     union {
09126     unsigned long LONG;
09127     struct {
09128
09129 #ifdef __RX_LITTLE_ENDIAN__
09130     unsigned long ARCHW : 11;
09131     unsigned long  : 5;
09132     unsigned long ARCHS : 11;
09133     unsigned long  : 5;
09134 #else
09135     unsigned long  : 5;
09136     unsigned long ARCHS : 11;
09137     unsigned long  : 5;
09138     unsigned long ARCHW : 11;
09139 #endif
09140     } BIT;
09141     } GR2AB5;
09142     union {
09143     unsigned long LONG;
09144     struct {
09145
09146 #ifdef __RX_LITTLE_ENDIAN__
09147     unsigned long ARCRATE : 8;
09148     unsigned long  : 8;
09149     unsigned long ARCCOEF : 9;
09150     unsigned long  : 7;
09151 #else
09152     unsigned long  : 7;
09153     unsigned long ARCCOEF : 9;
09154     unsigned long  : 8;
09155     unsigned long ARCRATE : 8;
09156 #endif
09157     } BIT;
09158     } GR2AB6;
09159     union {
09160     unsigned long LONG;
09161     struct {
09162
09163 #ifdef __RX_LITTLE_ENDIAN__
09164     unsigned long CKON : 1;
09165     unsigned long  : 15;
09166     unsigned long ARCDEF : 8;
09167     unsigned long  : 8;
09168 #else
09169     unsigned long  : 8;
09170     unsigned long ARCDEF : 8;
09171     unsigned long  : 15;
09172     unsigned long CKON : 1;
09173 #endif
09174     } BIT;
09175     } GR2AB7;
09176     union {
09177     unsigned long LONG;
09178     struct {
09179
09180 #ifdef __RX_LITTLE_ENDIAN__
09181     unsigned long CKKR : 8;
09182     unsigned long CKKB : 8;
09183     unsigned long CKKG : 8;
09184     unsigned long  : 8;
09185 #else
09186     unsigned long  : 8;
09187     unsigned long CKKG : 8;
09188     unsigned long CKKB : 8;
09189     unsigned long CKKR : 8;
09190 #endif
09191     } BIT;
09192     } GR2AB8;
09193     union {
09194     unsigned long LONG;
09195     struct {
09196

```

```

09197 #ifdef __RX_LITTLE_ENDIAN__
09198     unsigned long CKR : 8;
09199     unsigned long CKB : 8;
09200     unsigned long CKG : 8;
09201     unsigned long CKA : 8;
09202 #else
09203     unsigned long CKA : 8;
09204     unsigned long CKG : 8;
09205     unsigned long CKB : 8;
09206     unsigned long CKR : 8;
09207 #endif
09208 } BIT;
09209 } GR2AB9;
09210 char      wk7[8];
09211 union {
09212     unsigned long LONG;
09213     struct {
09214
09215 #ifdef __RX_LITTLE_ENDIAN__
09216     unsigned long R : 8;
09217     unsigned long B : 8;
09218     unsigned long G : 8;
09219     unsigned long  : 8;
09220 #else
09221     unsigned long  : 8;
09222     unsigned long G : 8;
09223     unsigned long B : 8;
09224     unsigned long R : 8;
09225 #endif
09226 } BIT;
09227 } GR2BASE;
09228 union {
09229     unsigned long LONG;
09230     struct {
09231
09232 #ifdef __RX_LITTLE_ENDIAN__
09233     unsigned long LINE : 11;
09234     unsigned long  : 5;
09235     unsigned long SEL : 1;
09236     unsigned long  : 15;
09237 #else
09238     unsigned long  : 15;
09239     unsigned long SEL : 1;
09240     unsigned long  : 5;
09241     unsigned long LINE : 11;
09242 #endif
09243 } BIT;
09244 } GR2CLUTINT;
09245 union {
09246     unsigned long LONG;
09247     struct {
09248
09249 #ifdef __RX_LITTLE_ENDIAN__
09250     unsigned long ARCST : 1;
09251     unsigned long  : 15;
09252     unsigned long UFST : 1;
09253     unsigned long  : 15;
09254 #else
09255     unsigned long  : 15;
09256     unsigned long UFST : 1;
09257     unsigned long  : 15;
09258     unsigned long ARCST : 1;
09259 #endif
09260 } BIT;
09261 } GR2MON;
09262 char      wk8[168];
09263 union {
09264     unsigned long LONG;
09265     struct {
09266
09267 #ifdef __RX_LITTLE_ENDIAN__
09268     unsigned long VEN : 1;
09269     unsigned long  : 31;
09270 #else
09271     unsigned long  : 31;
09272     unsigned long VEN : 1;
09273 #endif
09274 } BIT;
09275 } GAMGVEN;
09276 union {
09277     unsigned long LONG;
09278     struct {
09279
09280 #ifdef __RX_LITTLE_ENDIAN__
09281     unsigned long GAMON : 1;
09282     unsigned long  : 31;
09283 #else

```

```
09284         unsigned long : 31;
09285         unsigned long GAMON : 1;
09286 #endif
09287     } BIT;
09288     } GAMSW;
09289     union {
09290         unsigned long LONG;
09291         struct {
09292
09293 #ifdef __RX_LITTLE_ENDIAN__
09294         unsigned long GAIN01 : 11;
09295         unsigned long : 5;
09296         unsigned long GAIN00 : 11;
09297         unsigned long : 5;
09298 #else
09299         unsigned long : 5;
09300         unsigned long GAIN00 : 11;
09301         unsigned long : 5;
09302         unsigned long GAIN01 : 11;
09303 #endif
09304     } BIT;
09305     } GAMGLUT1;
09306     union {
09307         unsigned long LONG;
09308         struct {
09309
09310 #ifdef __RX_LITTLE_ENDIAN__
09311         unsigned long GAIN03 : 11;
09312         unsigned long : 5;
09313         unsigned long GAIN02 : 11;
09314         unsigned long : 5;
09315 #else
09316         unsigned long : 5;
09317         unsigned long GAIN02 : 11;
09318         unsigned long : 5;
09319         unsigned long GAIN03 : 11;
09320 #endif
09321     } BIT;
09322     } GAMGLUT2;
09323     union {
09324         unsigned long LONG;
09325         struct {
09326
09327 #ifdef __RX_LITTLE_ENDIAN__
09328         unsigned long GAIN05 : 11;
09329         unsigned long : 5;
09330         unsigned long GAIN04 : 11;
09331         unsigned long : 5;
09332 #else
09333         unsigned long : 5;
09334         unsigned long GAIN04 : 11;
09335         unsigned long : 5;
09336         unsigned long GAIN05 : 11;
09337 #endif
09338     } BIT;
09339     } GAMGLUT3;
09340     union {
09341         unsigned long LONG;
09342         struct {
09343
09344 #ifdef __RX_LITTLE_ENDIAN__
09345         unsigned long GAIN07 : 11;
09346         unsigned long : 5;
09347         unsigned long GAIN06 : 11;
09348         unsigned long : 5;
09349 #else
09350         unsigned long : 5;
09351         unsigned long GAIN06 : 11;
09352         unsigned long : 5;
09353         unsigned long GAIN07 : 11;
09354 #endif
09355     } BIT;
09356     } GAMGLUT4;
09357     union {
09358         unsigned long LONG;
09359         struct {
09360
09361 #ifdef __RX_LITTLE_ENDIAN__
09362         unsigned long GAIN09 : 11;
09363         unsigned long : 5;
09364         unsigned long GAIN08 : 11;
09365         unsigned long : 5;
09366 #else
09367         unsigned long : 5;
09368         unsigned long GAIN08 : 11;
09369         unsigned long : 5;
09370         unsigned long GAIN09 : 11;
```

```
09371 #endif
09372     } BIT;
09373     } GAMGLUT5;
09374     union {
09375         unsigned long LONG;
09376         struct {
09377
09378 #ifdef __RX_LITTLE_ENDIAN__
09379         unsigned long GAIN11 : 11;
09380         unsigned long : 5;
09381         unsigned long GAIN10 : 11;
09382         unsigned long : 5;
09383 #else
09384         unsigned long : 5;
09385         unsigned long GAIN10 : 11;
09386         unsigned long : 5;
09387         unsigned long GAIN11 : 11;
09388 #endif
09389     } BIT;
09390     } GAMGLUT6;
09391     union {
09392         unsigned long LONG;
09393         struct {
09394
09395 #ifdef __RX_LITTLE_ENDIAN__
09396         unsigned long GAIN13 : 11;
09397         unsigned long : 5;
09398         unsigned long GAIN12 : 11;
09399         unsigned long : 5;
09400 #else
09401         unsigned long : 5;
09402         unsigned long GAIN12 : 11;
09403         unsigned long : 5;
09404         unsigned long GAIN13 : 11;
09405 #endif
09406     } BIT;
09407     } GAMGLUT7;
09408     union {
09409         unsigned long LONG;
09410         struct {
09411
09412 #ifdef __RX_LITTLE_ENDIAN__
09413         unsigned long GAIN15 : 11;
09414         unsigned long : 5;
09415         unsigned long GAIN14 : 11;
09416         unsigned long : 5;
09417 #else
09418         unsigned long : 5;
09419         unsigned long GAIN14 : 11;
09420         unsigned long : 5;
09421         unsigned long GAIN15 : 11;
09422 #endif
09423     } BIT;
09424     } GAMGLUT8;
09425     union {
09426         unsigned long LONG;
09427         struct {
09428
09429 #ifdef __RX_LITTLE_ENDIAN__
09430         unsigned long TH03 : 10;
09431         unsigned long TH02 : 10;
09432         unsigned long TH01 : 10;
09433         unsigned long : 2;
09434 #else
09435         unsigned long : 2;
09436         unsigned long TH01 : 10;
09437         unsigned long TH02 : 10;
09438         unsigned long TH03 : 10;
09439 #endif
09440     } BIT;
09441     } GAMGAREA1;
09442     union {
09443         unsigned long LONG;
09444         struct {
09445
09446 #ifdef __RX_LITTLE_ENDIAN__
09447         unsigned long TH06 : 10;
09448         unsigned long TH05 : 10;
09449         unsigned long TH04 : 10;
09450         unsigned long : 2;
09451 #else
09452         unsigned long : 2;
09453         unsigned long TH04 : 10;
09454         unsigned long TH05 : 10;
09455         unsigned long TH06 : 10;
09456 #endif
09457     } BIT;
```

```

09458     } GAMGAREA2;
09459     union {
09460         unsigned long LONG;
09461         struct {
09462
09463 #ifdef __RX_LITTLE_ENDIAN__
09464         unsigned long TH09 : 10;
09465         unsigned long TH08 : 10;
09466         unsigned long TH07 : 10;
09467         unsigned long : 2;
09468 #else
09469         unsigned long : 2;
09470         unsigned long TH07 : 10;
09471         unsigned long TH08 : 10;
09472         unsigned long TH09 : 10;
09473 #endif
09474     } BIT;
09475     } GAMGAREA3;
09476     union {
09477         unsigned long LONG;
09478         struct {
09479
09480 #ifdef __RX_LITTLE_ENDIAN__
09481         unsigned long TH12 : 10;
09482         unsigned long TH11 : 10;
09483         unsigned long TH10 : 10;
09484         unsigned long : 2;
09485 #else
09486         unsigned long : 2;
09487         unsigned long TH10 : 10;
09488         unsigned long TH11 : 10;
09489         unsigned long TH12 : 10;
09490 #endif
09491     } BIT;
09492     } GAMGAREA4;
09493     union {
09494         unsigned long LONG;
09495         struct {
09496
09497 #ifdef __RX_LITTLE_ENDIAN__
09498         unsigned long TH15 : 10;
09499         unsigned long TH14 : 10;
09500         unsigned long TH13 : 10;
09501         unsigned long : 2;
09502 #else
09503         unsigned long : 2;
09504         unsigned long TH13 : 10;
09505         unsigned long TH14 : 10;
09506         unsigned long TH15 : 10;
09507 #endif
09508     } BIT;
09509     } GAMGAREA5;
09510     char          wk9[4];
09511     union {
09512         unsigned long LONG;
09513         struct {
09514
09515 #ifdef __RX_LITTLE_ENDIAN__
09516         unsigned long VEN : 1;
09517         unsigned long : 31;
09518 #else
09519         unsigned long : 31;
09520         unsigned long VEN : 1;
09521 #endif
09522     } BIT;
09523     } GAMBVEN;
09524     char          wk10[4];
09525     union {
09526         unsigned long LONG;
09527         struct {
09528
09529 #ifdef __RX_LITTLE_ENDIAN__
09530         unsigned long GAIN01 : 11;
09531         unsigned long : 5;
09532         unsigned long GAIN00 : 11;
09533         unsigned long : 5;
09534 #else
09535         unsigned long : 5;
09536         unsigned long GAIN00 : 11;
09537         unsigned long : 5;
09538         unsigned long GAIN01 : 11;
09539 #endif
09540     } BIT;
09541     } GAMBLUT1;
09542     union {
09543         unsigned long LONG;
09544         struct {

```

```
09545
09546 #ifdef __RX_LITTLE_ENDIAN__
09547     unsigned long GAIN03 : 11;
09548     unsigned long : 5;
09549     unsigned long GAIN02 : 11;
09550     unsigned long : 5;
09551 #else
09552     unsigned long : 5;
09553     unsigned long GAIN02 : 11;
09554     unsigned long : 5;
09555     unsigned long GAIN03 : 11;
09556 #endif
09557 } BIT;
09558 } GAMBLUT2;
09559 union {
09560     unsigned long LONG;
09561     struct {
09562
09563 #ifdef __RX_LITTLE_ENDIAN__
09564     unsigned long GAIN05 : 11;
09565     unsigned long : 5;
09566     unsigned long GAIN04 : 11;
09567     unsigned long : 5;
09568 #else
09569     unsigned long : 5;
09570     unsigned long GAIN04 : 11;
09571     unsigned long : 5;
09572     unsigned long GAIN05 : 11;
09573 #endif
09574 } BIT;
09575 } GAMBLUT3;
09576 union {
09577     unsigned long LONG;
09578     struct {
09579
09580 #ifdef __RX_LITTLE_ENDIAN__
09581     unsigned long GAIN07 : 11;
09582     unsigned long : 5;
09583     unsigned long GAIN06 : 11;
09584     unsigned long : 5;
09585 #else
09586     unsigned long : 5;
09587     unsigned long GAIN06 : 11;
09588     unsigned long : 5;
09589     unsigned long GAIN07 : 11;
09590 #endif
09591 } BIT;
09592 } GAMBLUT4;
09593 union {
09594     unsigned long LONG;
09595     struct {
09596
09597 #ifdef __RX_LITTLE_ENDIAN__
09598     unsigned long GAIN09 : 11;
09599     unsigned long : 5;
09600     unsigned long GAIN08 : 11;
09601     unsigned long : 5;
09602 #else
09603     unsigned long : 5;
09604     unsigned long GAIN08 : 11;
09605     unsigned long : 5;
09606     unsigned long GAIN09 : 11;
09607 #endif
09608 } BIT;
09609 } GAMBLUT5;
09610 union {
09611     unsigned long LONG;
09612     struct {
09613
09614 #ifdef __RX_LITTLE_ENDIAN__
09615     unsigned long GAIN11 : 11;
09616     unsigned long : 5;
09617     unsigned long GAIN10 : 11;
09618     unsigned long : 5;
09619 #else
09620     unsigned long : 5;
09621     unsigned long GAIN10 : 11;
09622     unsigned long : 5;
09623     unsigned long GAIN11 : 11;
09624 #endif
09625 } BIT;
09626 } GAMBLUT6;
09627 union {
09628     unsigned long LONG;
09629     struct {
09630
09631 #ifdef __RX_LITTLE_ENDIAN__
```

```
09632         unsigned long GAIN13 : 11;
09633         unsigned long : 5;
09634         unsigned long GAIN12 : 11;
09635         unsigned long : 5;
09636 #else
09637         unsigned long : 5;
09638         unsigned long GAIN12 : 11;
09639         unsigned long : 5;
09640         unsigned long GAIN13 : 11;
09641 #endif
09642     } BIT;
09643     } GAMBLUT7;
09644     union {
09645         unsigned long LONG;
09646         struct {
09647
09648 #ifdef __RX_LITTLE_ENDIAN__
09649         unsigned long GAIN15 : 11;
09650         unsigned long : 5;
09651         unsigned long GAIN14 : 11;
09652         unsigned long : 5;
09653 #else
09654         unsigned long : 5;
09655         unsigned long GAIN14 : 11;
09656         unsigned long : 5;
09657         unsigned long GAIN15 : 11;
09658 #endif
09659     } BIT;
09660     } GAMBLUT8;
09661     union {
09662         unsigned long LONG;
09663         struct {
09664
09665 #ifdef __RX_LITTLE_ENDIAN__
09666         unsigned long TH03 : 10;
09667         unsigned long TH02 : 10;
09668         unsigned long TH01 : 10;
09669         unsigned long : 2;
09670 #else
09671         unsigned long : 2;
09672         unsigned long TH01 : 10;
09673         unsigned long TH02 : 10;
09674         unsigned long TH03 : 10;
09675 #endif
09676     } BIT;
09677     } GAMBAREA1;
09678     union {
09679         unsigned long LONG;
09680         struct {
09681
09682 #ifdef __RX_LITTLE_ENDIAN__
09683         unsigned long TH06 : 10;
09684         unsigned long TH05 : 10;
09685         unsigned long TH04 : 10;
09686         unsigned long : 2;
09687 #else
09688         unsigned long : 2;
09689         unsigned long TH04 : 10;
09690         unsigned long TH05 : 10;
09691         unsigned long TH06 : 10;
09692 #endif
09693     } BIT;
09694     } GAMBAREA2;
09695     union {
09696         unsigned long LONG;
09697         struct {
09698
09699 #ifdef __RX_LITTLE_ENDIAN__
09700         unsigned long TH09 : 10;
09701         unsigned long TH08 : 10;
09702         unsigned long TH07 : 10;
09703         unsigned long : 2;
09704 #else
09705         unsigned long : 2;
09706         unsigned long TH07 : 10;
09707         unsigned long TH08 : 10;
09708         unsigned long TH09 : 10;
09709 #endif
09710     } BIT;
09711     } GAMBAREA3;
09712     union {
09713         unsigned long LONG;
09714         struct {
09715
09716 #ifdef __RX_LITTLE_ENDIAN__
09717         unsigned long TH12 : 10;
09718         unsigned long TH11 : 10;
```

```

09719         unsigned long TH10 : 10;
09720         unsigned long   : 2;
09721 #else
09722         unsigned long   : 2;
09723         unsigned long TH10 : 10;
09724         unsigned long TH11 : 10;
09725         unsigned long TH12 : 10;
09726 #endif
09727     } BIT;
09728     } GAMBAREAA4;
09729     union {
09730         unsigned long LONG;
09731     struct {
09732
09733 #ifdef __RX_LITTLE_ENDIAN__
09734         unsigned long TH15 : 10;
09735         unsigned long TH14 : 10;
09736         unsigned long TH13 : 10;
09737         unsigned long   : 2;
09738 #else
09739         unsigned long   : 2;
09740         unsigned long TH13 : 10;
09741         unsigned long TH14 : 10;
09742         unsigned long TH15 : 10;
09743 #endif
09744     } BIT;
09745     } GAMBAREAA5;
09746     char      wk11[4];
09747     union {
09748         unsigned long LONG;
09749     struct {
09750
09751 #ifdef __RX_LITTLE_ENDIAN__
09752         unsigned long VEN : 1;
09753         unsigned long   : 31;
09754 #else
09755         unsigned long   : 31;
09756         unsigned long VEN : 1;
09757 #endif
09758     } BIT;
09759     } GAMRVEN;
09760     char      wk12[4];
09761     union {
09762         unsigned long LONG;
09763     struct {
09764
09765 #ifdef __RX_LITTLE_ENDIAN__
09766         unsigned long GAIN01 : 11;
09767         unsigned long   : 5;
09768         unsigned long GAIN00 : 11;
09769         unsigned long   : 5;
09770 #else
09771         unsigned long   : 5;
09772         unsigned long GAIN00 : 11;
09773         unsigned long   : 5;
09774         unsigned long GAIN01 : 11;
09775 #endif
09776     } BIT;
09777     } GAMRLUT1;
09778     union {
09779         unsigned long LONG;
09780     struct {
09781
09782 #ifdef __RX_LITTLE_ENDIAN__
09783         unsigned long GAIN03 : 11;
09784         unsigned long   : 5;
09785         unsigned long GAIN02 : 11;
09786         unsigned long   : 5;
09787 #else
09788         unsigned long   : 5;
09789         unsigned long GAIN02 : 11;
09790         unsigned long   : 5;
09791         unsigned long GAIN03 : 11;
09792 #endif
09793     } BIT;
09794     } GAMRLUT2;
09795     union {
09796         unsigned long LONG;
09797     struct {
09798
09799 #ifdef __RX_LITTLE_ENDIAN__
09800         unsigned long GAIN05 : 11;
09801         unsigned long   : 5;
09802         unsigned long GAIN04 : 11;
09803         unsigned long   : 5;
09804 #else
09805         unsigned long   : 5;

```

```
09806         unsigned long GAIN04 : 11;
09807         unsigned long  : 5;
09808         unsigned long GAIN05 : 11;
09809 #endif
09810     } BIT;
09811     } GAMRLUT3;
09812     union {
09813         unsigned long LONG;
09814         struct {
09815
09816 #ifdef __RX_LITTLE_ENDIAN__
09817         unsigned long GAIN07 : 11;
09818         unsigned long  : 5;
09819         unsigned long GAIN06 : 11;
09820         unsigned long  : 5;
09821 #else
09822         unsigned long  : 5;
09823         unsigned long GAIN06 : 11;
09824         unsigned long  : 5;
09825         unsigned long GAIN07 : 11;
09826 #endif
09827     } BIT;
09828     } GAMRLUT4;
09829     union {
09830         unsigned long LONG;
09831         struct {
09832
09833 #ifdef __RX_LITTLE_ENDIAN__
09834         unsigned long GAIN09 : 11;
09835         unsigned long  : 5;
09836         unsigned long GAIN08 : 11;
09837         unsigned long  : 5;
09838 #else
09839         unsigned long  : 5;
09840         unsigned long GAIN08 : 11;
09841         unsigned long  : 5;
09842         unsigned long GAIN09 : 11;
09843 #endif
09844     } BIT;
09845     } GAMRLUT5;
09846     union {
09847         unsigned long LONG;
09848         struct {
09849
09850 #ifdef __RX_LITTLE_ENDIAN__
09851         unsigned long GAIN11 : 11;
09852         unsigned long  : 5;
09853         unsigned long GAIN10 : 11;
09854         unsigned long  : 5;
09855 #else
09856         unsigned long  : 5;
09857         unsigned long GAIN10 : 11;
09858         unsigned long  : 5;
09859         unsigned long GAIN11 : 11;
09860 #endif
09861     } BIT;
09862     } GAMRLUT6;
09863     union {
09864         unsigned long LONG;
09865         struct {
09866
09867 #ifdef __RX_LITTLE_ENDIAN__
09868         unsigned long GAIN13 : 11;
09869         unsigned long  : 5;
09870         unsigned long GAIN12 : 11;
09871         unsigned long  : 5;
09872 #else
09873         unsigned long  : 5;
09874         unsigned long GAIN12 : 11;
09875         unsigned long  : 5;
09876         unsigned long GAIN13 : 11;
09877 #endif
09878     } BIT;
09879     } GAMRLUT7;
09880     union {
09881         unsigned long LONG;
09882         struct {
09883
09884 #ifdef __RX_LITTLE_ENDIAN__
09885         unsigned long GAIN15 : 11;
09886         unsigned long  : 5;
09887         unsigned long GAIN14 : 11;
09888         unsigned long  : 5;
09889 #else
09890         unsigned long  : 5;
09891         unsigned long GAIN14 : 11;
09892         unsigned long  : 5;
```

```

09893         unsigned long GAIN15 : 11;
09894 #endif
09895     } BIT;
09896     } GAMRLUT8;
09897     union {
09898         unsigned long LONG;
09899         struct {
09900
09901 #ifdef __RX_LITTLE_ENDIAN__
09902         unsigned long TH03 : 10;
09903         unsigned long TH02 : 10;
09904         unsigned long TH01 : 10;
09905         unsigned long : 2;
09906 #else
09907         unsigned long : 2;
09908         unsigned long TH01 : 10;
09909         unsigned long TH02 : 10;
09910         unsigned long TH03 : 10;
09911 #endif
09912     } BIT;
09913     } GAMRAREA1;
09914     union {
09915         unsigned long LONG;
09916         struct {
09917
09918 #ifdef __RX_LITTLE_ENDIAN__
09919         unsigned long TH06 : 10;
09920         unsigned long TH05 : 10;
09921         unsigned long TH04 : 10;
09922         unsigned long : 2;
09923 #else
09924         unsigned long : 2;
09925         unsigned long TH04 : 10;
09926         unsigned long TH05 : 10;
09927         unsigned long TH06 : 10;
09928 #endif
09929     } BIT;
09930     } GAMRAREA2;
09931     union {
09932         unsigned long LONG;
09933         struct {
09934
09935 #ifdef __RX_LITTLE_ENDIAN__
09936         unsigned long TH09 : 10;
09937         unsigned long TH08 : 10;
09938         unsigned long TH07 : 10;
09939         unsigned long : 2;
09940 #else
09941         unsigned long : 2;
09942         unsigned long TH07 : 10;
09943         unsigned long TH08 : 10;
09944         unsigned long TH09 : 10;
09945 #endif
09946     } BIT;
09947     } GAMRAREA3;
09948     union {
09949         unsigned long LONG;
09950         struct {
09951
09952 #ifdef __RX_LITTLE_ENDIAN__
09953         unsigned long TH12 : 10;
09954         unsigned long TH11 : 10;
09955         unsigned long TH10 : 10;
09956         unsigned long : 2;
09957 #else
09958         unsigned long : 2;
09959         unsigned long TH10 : 10;
09960         unsigned long TH11 : 10;
09961         unsigned long TH12 : 10;
09962 #endif
09963     } BIT;
09964     } GAMRAREA4;
09965     union {
09966         unsigned long LONG;
09967         struct {
09968
09969 #ifdef __RX_LITTLE_ENDIAN__
09970         unsigned long TH15 : 10;
09971         unsigned long TH14 : 10;
09972         unsigned long TH13 : 10;
09973         unsigned long : 2;
09974 #else
09975         unsigned long : 2;
09976         unsigned long TH13 : 10;
09977         unsigned long TH14 : 10;
09978         unsigned long TH15 : 10;
09979 #endif

```

```

09980     } BIT;
09981     } GAMRAREA5;
09982     char        wk13[4];
09983     union {
09984         unsigned long LONG;
09985         struct {
09986
09987 #ifdef __RX_LITTLE_ENDIAN__
09988         unsigned long VEN : 1;
09989         unsigned long : 31;
09990 #else
09991         unsigned long : 31;
09992         unsigned long VEN : 1;
09993 #endif
09994     } BIT;
09995     } OUTVEN;
09996     union {
09997         unsigned long LONG;
09998         struct {
09999
10000 #ifdef __RX_LITTLE_ENDIAN__
10001         unsigned long PHASE : 2;
10002         unsigned long : 2;
10003         unsigned long DIRSEL : 1;
10004         unsigned long : 4;
10005         unsigned long FRQSEL : 1;
10006         unsigned long : 2;
10007         unsigned long FORMAT : 2;
10008         unsigned long : 10;
10009         unsigned long SWAPON : 1;
10010         unsigned long : 3;
10011         unsigned long ENDIANON : 1;
10012         unsigned long : 3;
10013 #else
10014         unsigned long : 3;
10015         unsigned long ENDIANON : 1;
10016         unsigned long : 3;
10017         unsigned long SWAPON : 1;
10018         unsigned long : 10;
10019         unsigned long FORMAT : 2;
10020         unsigned long : 2;
10021         unsigned long FRQSEL : 1;
10022         unsigned long : 4;
10023         unsigned long DIRSEL : 1;
10024         unsigned long : 2;
10025         unsigned long PHASE : 2;
10026 #endif
10027     } BIT;
10028     } OUTSET;
10029     union {
10030         unsigned long LONG;
10031         struct {
10032
10033 #ifdef __RX_LITTLE_ENDIAN__
10034         unsigned long BRTG : 10;
10035         unsigned long : 22;
10036 #else
10037         unsigned long : 22;
10038         unsigned long BRTG : 10;
10039 #endif
10040     } BIT;
10041     } BRIGHT1;
10042     union {
10043         unsigned long LONG;
10044         struct {
10045
10046 #ifdef __RX_LITTLE_ENDIAN__
10047         unsigned long BRTR : 10;
10048         unsigned long : 6;
10049         unsigned long BRTB : 10;
10050         unsigned long : 6;
10051 #else
10052         unsigned long : 6;
10053         unsigned long BRTB : 10;
10054         unsigned long : 6;
10055         unsigned long BRTR : 10;
10056 #endif
10057     } BIT;
10058     } BRIGHT2;
10059     union {
10060         unsigned long LONG;
10061         struct {
10062
10063 #ifdef __RX_LITTLE_ENDIAN__
10064         unsigned long CONTR : 8;
10065         unsigned long CONTB : 8;
10066         unsigned long CONTG : 8;

```

```

10067         unsigned long : 8;
10068 #else
10069         unsigned long : 8;
10070         unsigned long CONTG : 8;
10071         unsigned long CONTR : 8;
10072         unsigned long CONTR : 8;
10073 #endif
10074     } BIT;
10075     } CONTRAST;
10076     union {
10077         unsigned long LONG;
10078         struct {
10079
10080 #ifdef __RX_LITTLE_ENDIAN__
10081         unsigned long PD : 2;
10082         unsigned long : 2;
10083         unsigned long PC : 2;
10084         unsigned long : 2;
10085         unsigned long PB : 2;
10086         unsigned long : 2;
10087         unsigned long PA : 2;
10088         unsigned long : 2;
10089         unsigned long FORM : 2;
10090         unsigned long : 2;
10091         unsigned long SEL : 2;
10092         unsigned long : 10;
10093 #else
10094         unsigned long : 10;
10095         unsigned long SEL : 2;
10096         unsigned long : 2;
10097         unsigned long FORM : 2;
10098         unsigned long : 2;
10099         unsigned long PA : 2;
10100         unsigned long : 2;
10101         unsigned long PB : 2;
10102         unsigned long : 2;
10103         unsigned long PC : 2;
10104         unsigned long : 2;
10105         unsigned long PD : 2;
10106 #endif
10107     } BIT;
10108     } PANELDTHA;
10109     char        wk14[12];
10110     union {
10111         unsigned long LONG;
10112         struct {
10113
10114 #ifdef __RX_LITTLE_ENDIAN__
10115         unsigned long : 3;
10116         unsigned long TCON3EDG : 1;
10117         unsigned long TCON2EDG : 1;
10118         unsigned long TCON1EDG : 1;
10119         unsigned long TCON0EDG : 1;
10120         unsigned long : 1;
10121         unsigned long LCDEDG : 1;
10122         unsigned long : 3;
10123         unsigned long FRONTGAM : 1;
10124         unsigned long : 19;
10125 #else
10126         unsigned long : 19;
10127         unsigned long FRONTGAM : 1;
10128         unsigned long : 3;
10129         unsigned long LCDEDG : 1;
10130         unsigned long : 1;
10131         unsigned long TCON0EDG : 1;
10132         unsigned long TCON1EDG : 1;
10133         unsigned long TCON2EDG : 1;
10134         unsigned long TCON3EDG : 1;
10135         unsigned long : 3;
10136 #endif
10137     } BIT;
10138     } CLKPHASE;
10139     char        wk15[28];
10140     union {
10141         unsigned long LONG;
10142         struct {
10143
10144 #ifdef __RX_LITTLE_ENDIAN__
10145         unsigned long OFFSET : 11;
10146         unsigned long : 5;
10147         unsigned long HALF : 11;
10148         unsigned long : 5;
10149 #else
10150         unsigned long : 5;
10151         unsigned long HALF : 11;
10152         unsigned long : 5;
10153         unsigned long OFFSET : 11;

```

```

10154 #endif
10155     } BIT;
10156     } TCONTIM;
10157     union {
10158         unsigned long LONG;
10159         struct {
10160
10161 #ifdef __RX_LITTLE_ENDIAN__
10162         unsigned long VW : 11;
10163         unsigned long : 5;
10164         unsigned long VS : 11;
10165         unsigned long : 5;
10166 #else
10167         unsigned long : 5;
10168         unsigned long VS : 11;
10169         unsigned long : 5;
10170         unsigned long VW : 11;
10171 #endif
10172     } BIT;
10173     } TCONSTVA1;
10174     union {
10175         unsigned long LONG;
10176         struct {
10177
10178 #ifdef __RX_LITTLE_ENDIAN__
10179         unsigned long SEL : 3;
10180         unsigned long : 1;
10181         unsigned long INV : 1;
10182         unsigned long : 27;
10183 #else
10184         unsigned long : 27;
10185         unsigned long INV : 1;
10186         unsigned long : 1;
10187         unsigned long SEL : 3;
10188 #endif
10189     } BIT;
10190     } TCONSTVA2;
10191     union {
10192         unsigned long LONG;
10193         struct {
10194
10195 #ifdef __RX_LITTLE_ENDIAN__
10196         unsigned long VW : 11;
10197         unsigned long : 5;
10198         unsigned long VS : 11;
10199         unsigned long : 5;
10200 #else
10201         unsigned long : 5;
10202         unsigned long VS : 11;
10203         unsigned long : 5;
10204         unsigned long VW : 11;
10205 #endif
10206     } BIT;
10207     } TCONSTVB1;
10208     union {
10209         unsigned long LONG;
10210         struct {
10211
10212 #ifdef __RX_LITTLE_ENDIAN__
10213         unsigned long SEL : 3;
10214         unsigned long : 1;
10215         unsigned long INV : 1;
10216         unsigned long : 27;
10217 #else
10218         unsigned long : 27;
10219         unsigned long INV : 1;
10220         unsigned long : 1;
10221         unsigned long SEL : 3;
10222 #endif
10223     } BIT;
10224     } TCONSTVB2;
10225     union {
10226         unsigned long LONG;
10227         struct {
10228
10229 #ifdef __RX_LITTLE_ENDIAN__
10230         unsigned long HW : 11;
10231         unsigned long : 5;
10232         unsigned long HS : 11;
10233         unsigned long : 5;
10234 #else
10235         unsigned long : 5;
10236         unsigned long HS : 11;
10237         unsigned long : 5;
10238         unsigned long HW : 11;
10239 #endif
10240     } BIT;

```

```

10241     } TCONSTHA1;
10242     union {
10243         unsigned long LONG;
10244         struct {
10245
10246 #ifdef __RX_LITTLE_ENDIAN__
10247         unsigned long SEL : 3;
10248         unsigned long : 1;
10249         unsigned long INV : 1;
10250         unsigned long : 3;
10251         unsigned long HSSEL : 1;
10252         unsigned long : 23;
10253 #else
10254         unsigned long : 23;
10255         unsigned long HSSEL : 1;
10256         unsigned long : 3;
10257         unsigned long INV : 1;
10258         unsigned long : 1;
10259         unsigned long SEL : 3;
10260 #endif
10261     } BIT;
10262     } TCONSTHA2;
10263     union {
10264         unsigned long LONG;
10265         struct {
10266
10267 #ifdef __RX_LITTLE_ENDIAN__
10268         unsigned long HW : 11;
10269         unsigned long : 5;
10270         unsigned long HS : 11;
10271         unsigned long : 5;
10272 #else
10273         unsigned long : 5;
10274         unsigned long HS : 11;
10275         unsigned long : 5;
10276         unsigned long HW : 11;
10277 #endif
10278     } BIT;
10279     } TCONSTHB1;
10280     union {
10281         unsigned long LONG;
10282         struct {
10283
10284 #ifdef __RX_LITTLE_ENDIAN__
10285         unsigned long SEL : 3;
10286         unsigned long : 1;
10287         unsigned long INV : 1;
10288         unsigned long : 3;
10289         unsigned long HSSEL : 1;
10290         unsigned long : 23;
10291 #else
10292         unsigned long : 23;
10293         unsigned long HSSEL : 1;
10294         unsigned long : 3;
10295         unsigned long INV : 1;
10296         unsigned long : 1;
10297         unsigned long SEL : 3;
10298 #endif
10299     } BIT;
10300     } TCONSTHB2;
10301     union {
10302         unsigned long LONG;
10303         struct {
10304
10305 #ifdef __RX_LITTLE_ENDIAN__
10306         unsigned long INV : 1;
10307         unsigned long : 31;
10308 #else
10309         unsigned long : 31;
10310         unsigned long INV : 1;
10311 #endif
10312     } BIT;
10313     } TCONDE;
10314     char wk16[20];
10315     union {
10316         unsigned long LONG;
10317         struct {
10318
10319 #ifdef __RX_LITTLE_ENDIAN__
10320         unsigned long VPOSDTC : 1;
10321         unsigned long GRIUFDTC : 1;
10322         unsigned long GR2UFDTC : 1;
10323         unsigned long : 29;
10324 #else
10325         unsigned long : 29;
10326         unsigned long GR2UFDTC : 1;
10327         unsigned long GRIUFDTC : 1;

```

```

10328         unsigned long VPOSDTC : 1;
10329 #endif
10330     } BIT;
10331     } DTCTEN;
10332     union {
10333         unsigned long LONG;
10334         struct {
10335
10336 #ifdef __RX_LITTLE_ENDIAN__
10337         unsigned long VPOSINTEN : 1;
10338         unsigned long GR1UFINTEN : 1;
10339         unsigned long GR2UFINTEN : 1;
10340         unsigned long : 29;
10341 #else
10342         unsigned long : 29;
10343         unsigned long GR2UFINTEN : 1;
10344         unsigned long GR1UFINTEN : 1;
10345         unsigned long VPOSINTEN : 1;
10346 #endif
10347     } BIT;
10348     } INTEN;
10349     union {
10350         unsigned long LONG;
10351         struct {
10352
10353 #ifdef __RX_LITTLE_ENDIAN__
10354         unsigned long VPOSCLR : 1;
10355         unsigned long GR1UFCLR : 1;
10356         unsigned long GR2UFCLR : 1;
10357         unsigned long : 29;
10358 #else
10359         unsigned long : 29;
10360         unsigned long GR2UFCLR : 1;
10361         unsigned long GR1UFCLR : 1;
10362         unsigned long VPOSCLR : 1;
10363 #endif
10364     } BIT;
10365     } STCLR;
10366     union {
10367         unsigned long LONG;
10368         struct {
10369
10370 #ifdef __RX_LITTLE_ENDIAN__
10371         unsigned long VPOS : 1;
10372         unsigned long GR1UF : 1;
10373         unsigned long GR2UF : 1;
10374         unsigned long : 29;
10375 #else
10376         unsigned long : 29;
10377         unsigned long GR2UF : 1;
10378         unsigned long GR1UF : 1;
10379         unsigned long VPOS : 1;
10380 #endif
10381     } BIT;
10382     } STMON;
10383     union {
10384         unsigned long LONG;
10385         struct {
10386
10387 #ifdef __RX_LITTLE_ENDIAN__
10388         unsigned long DCDR : 6;
10389         unsigned long CLKEN : 1;
10390         unsigned long : 1;
10391         unsigned long CLKSEL : 1;
10392         unsigned long : 3;
10393         unsigned long PIXSEL : 1;
10394         unsigned long : 19;
10395 #else
10396         unsigned long : 19;
10397         unsigned long PIXSEL : 1;
10398         unsigned long : 3;
10399         unsigned long CLKSEL : 1;
10400         unsigned long : 1;
10401         unsigned long CLKEN : 1;
10402         unsigned long DCDR : 6;
10403 #endif
10404     } BIT;
10405     } PANELCLK;
10406 } st_glcdc_t;
10407
10408 typedef struct st_gptw {
10409     union {
10410         unsigned long LONG;
10411         struct {
10412
10413 #ifdef __RX_LITTLE_ENDIAN__
10414         unsigned long WP : 1;

```

```

10415         unsigned long STRWP : 1;
10416         unsigned long STPWP : 1;
10417         unsigned long CLRWP : 1;
10418         unsigned long CMNWP : 1;
10419         unsigned long : 3;
10420         unsigned long PRKEY : 8;
10421         unsigned long : 16;
10422 #else
10423         unsigned long : 16;
10424         unsigned long PRKEY : 8;
10425         unsigned long : 3;
10426         unsigned long CMNWP : 1;
10427         unsigned long CLRWP : 1;
10428         unsigned long STPWP : 1;
10429         unsigned long STRWP : 1;
10430         unsigned long WP : 1;
10431 #endif
10432     } BIT;
10433     } GTWP;
10434     union {
10435         unsigned long LONG;
10436         struct {
10437
10438 #ifdef __RX_LITTLE_ENDIAN__
10439         unsigned long CSTRT0 : 1;
10440         unsigned long CSTRT1 : 1;
10441         unsigned long CSTRT2 : 1;
10442         unsigned long CSTRT3 : 1;
10443         unsigned long : 28;
10444 #else
10445         unsigned long : 28;
10446         unsigned long CSTRT3 : 1;
10447         unsigned long CSTRT2 : 1;
10448         unsigned long CSTRT1 : 1;
10449         unsigned long CSTRT0 : 1;
10450 #endif
10451     } BIT;
10452     } GTSTR;
10453     union {
10454         unsigned long LONG;
10455         struct {
10456
10457 #ifdef __RX_LITTLE_ENDIAN__
10458         unsigned long CSTOP0 : 1;
10459         unsigned long CSTOP1 : 1;
10460         unsigned long CSTOP2 : 1;
10461         unsigned long CSTOP3 : 1;
10462         unsigned long : 28;
10463 #else
10464         unsigned long : 28;
10465         unsigned long CSTOP3 : 1;
10466         unsigned long CSTOP2 : 1;
10467         unsigned long CSTOP1 : 1;
10468         unsigned long CSTOP0 : 1;
10469 #endif
10470     } BIT;
10471     } GTSTP;
10472     union {
10473         unsigned long LONG;
10474         struct {
10475
10476 #ifdef __RX_LITTLE_ENDIAN__
10477         unsigned long CCLR0 : 1;
10478         unsigned long CCLR1 : 1;
10479         unsigned long CCLR2 : 1;
10480         unsigned long CCLR3 : 1;
10481         unsigned long : 28;
10482 #else
10483         unsigned long : 28;
10484         unsigned long CCLR3 : 1;
10485         unsigned long CCLR2 : 1;
10486         unsigned long CCLR1 : 1;
10487         unsigned long CCLR0 : 1;
10488 #endif
10489     } BIT;
10490     } GTCLR;
10491     union {
10492         unsigned long LONG;
10493         struct {
10494
10495 #ifdef __RX_LITTLE_ENDIAN__
10496         unsigned long SSGTRGAR : 1;
10497         unsigned long SSGTRGAF : 1;
10498         unsigned long SSGTRGBR : 1;
10499         unsigned long SSGTRGBF : 1;
10500         unsigned long SSGTRGCR : 1;
10501         unsigned long SSGTRGCF : 1;

```

```

10502     unsigned long SSGTRGDR : 1;
10503     unsigned long SSGTRGDF : 1;
10504     unsigned long SSCARBL : 1;
10505     unsigned long SSCARBH : 1;
10506     unsigned long SSCAFBL : 1;
10507     unsigned long SSCAFBH : 1;
10508     unsigned long SSCBRAL : 1;
10509     unsigned long SSCBRAH : 1;
10510     unsigned long SSCBFAL : 1;
10511     unsigned long SSCBFAH : 1;
10512     unsigned long SSELCA : 1;
10513     unsigned long SSELCB : 1;
10514     unsigned long SSELCC : 1;
10515     unsigned long SSELCD : 1;
10516     unsigned long SSELCE : 1;
10517     unsigned long SSELCF : 1;
10518     unsigned long SSELCG : 1;
10519     unsigned long SELCH : 1;
10520     unsigned long      : 7;
10521     unsigned long CSTRT : 1;
10522 #else
10523     unsigned long CSTRT : 1;
10524     unsigned long      : 7;
10525     unsigned long SELCH : 1;
10526     unsigned long SSELCG : 1;
10527     unsigned long SSELCF : 1;
10528     unsigned long SSELCE : 1;
10529     unsigned long SSELCD : 1;
10530     unsigned long SSELCC : 1;
10531     unsigned long SSELCB : 1;
10532     unsigned long SSELCA : 1;
10533     unsigned long SSCBFAH : 1;
10534     unsigned long SSCBFAL : 1;
10535     unsigned long SSCBRAH : 1;
10536     unsigned long SSCBRAL : 1;
10537     unsigned long SSCAFBH : 1;
10538     unsigned long SSCAFBL : 1;
10539     unsigned long SSCARBH : 1;
10540     unsigned long SSCARBL : 1;
10541     unsigned long SSGTRGDF : 1;
10542     unsigned long SSGTRGDR : 1;
10543     unsigned long SSGTRGCF : 1;
10544     unsigned long SSGTRGCR : 1;
10545     unsigned long SSGTRGBF : 1;
10546     unsigned long SSGTRGBR : 1;
10547     unsigned long SSGTRGAF : 1;
10548     unsigned long SSGTRGAR : 1;
10549 #endif
10550 } BIT;
10551 } GTSSR;
10552 union {
10553     unsigned long LONG;
10554     struct {
10555
10556 #ifdef __RX_LITTLE_ENDIAN__
10557     unsigned long PSGTRGAR : 1;
10558     unsigned long PSGTRGAF : 1;
10559     unsigned long PSGTRGBR : 1;
10560     unsigned long PSGTRGBF : 1;
10561     unsigned long PSGTRGCR : 1;
10562     unsigned long PSGTRGCF : 1;
10563     unsigned long PSGTRGDR : 1;
10564     unsigned long PSGTRGDF : 1;
10565     unsigned long PSCARBL : 1;
10566     unsigned long PSCARBH : 1;
10567     unsigned long PSCAFBL : 1;
10568     unsigned long PSCAFBH : 1;
10569     unsigned long PSCBRAL : 1;
10570     unsigned long PSCBRAH : 1;
10571     unsigned long PSCBFAL : 1;
10572     unsigned long PSCBFAH : 1;
10573     unsigned long PSELCA : 1;
10574     unsigned long PSELCB : 1;
10575     unsigned long PSELCC : 1;
10576     unsigned long PSELCD : 1;
10577     unsigned long PSELCE : 1;
10578     unsigned long PSELCF : 1;
10579     unsigned long PSELCG : 1;
10580     unsigned long PSELCH : 1;
10581     unsigned long      : 7;
10582     unsigned long CSTOP : 1;
10583 #else
10584     unsigned long CSTOP : 1;
10585     unsigned long      : 7;
10586     unsigned long PSELCH : 1;
10587     unsigned long PSELCG : 1;
10588     unsigned long PSELCF : 1;

```

```
10589     unsigned long PSELCE : 1;
10590     unsigned long PSELCD : 1;
10591     unsigned long PSELCC : 1;
10592     unsigned long PSELCB : 1;
10593     unsigned long PSELCA : 1;
10594     unsigned long PSCBFAH : 1;
10595     unsigned long PSCBFAL : 1;
10596     unsigned long PSCBRAH : 1;
10597     unsigned long PSCBRAL : 1;
10598     unsigned long PSCAFBH : 1;
10599     unsigned long PSCAFBL : 1;
10600     unsigned long PSCARBH : 1;
10601     unsigned long PSCARBL : 1;
10602     unsigned long PSGTRGDF : 1;
10603     unsigned long PSGTRGDR : 1;
10604     unsigned long PSGTRGCF : 1;
10605     unsigned long PSGTRGCR : 1;
10606     unsigned long PSGTRGBF : 1;
10607     unsigned long PSGTRGBR : 1;
10608     unsigned long PSGTRGAF : 1;
10609     unsigned long PSGTRGAR : 1;
10610 #endif
10611     } BIT;
10612     } GTPSR;
10613     union {
10614         unsigned long LONG;
10615         struct {
10616
10617 #ifdef __RX_LITTLE_ENDIAN__
10618         unsigned long CSGTRGAR : 1;
10619         unsigned long CSGTRGAF : 1;
10620         unsigned long CSGTRGBR : 1;
10621         unsigned long CSGTRGBF : 1;
10622         unsigned long CSGTRGCR : 1;
10623         unsigned long CSGTRGCF : 1;
10624         unsigned long CSGTRGDR : 1;
10625         unsigned long CSGTRGDF : 1;
10626         unsigned long CSCARBL : 1;
10627         unsigned long CSCARBH : 1;
10628         unsigned long CSCAFBL : 1;
10629         unsigned long CSCAFBH : 1;
10630         unsigned long CSCBRAL : 1;
10631         unsigned long CSCBRAH : 1;
10632         unsigned long CSCBFAL : 1;
10633         unsigned long CSCBFAH : 1;
10634         unsigned long CSELCA : 1;
10635         unsigned long CSELCB : 1;
10636         unsigned long CSELCC : 1;
10637         unsigned long CSELCD : 1;
10638         unsigned long CSELCE : 1;
10639         unsigned long CSELCF : 1;
10640         unsigned long CSELCG : 1;
10641         unsigned long CSELCH : 1;
10642         unsigned long : 7;
10643         unsigned long CCLR : 1;
10644 #else
10645         unsigned long CCLR : 1;
10646         unsigned long : 7;
10647         unsigned long CSELCH : 1;
10648         unsigned long CSELCG : 1;
10649         unsigned long CSELCF : 1;
10650         unsigned long CSELCE : 1;
10651         unsigned long CSELCD : 1;
10652         unsigned long CSELCC : 1;
10653         unsigned long CSELCB : 1;
10654         unsigned long CSELCA : 1;
10655         unsigned long CSCBFAH : 1;
10656         unsigned long CSCBFAL : 1;
10657         unsigned long CSCBRAH : 1;
10658         unsigned long CSCBRAL : 1;
10659         unsigned long CSCAFBH : 1;
10660         unsigned long CSCAFBL : 1;
10661         unsigned long CSCARBH : 1;
10662         unsigned long CSCARBL : 1;
10663         unsigned long CSGTRGDF : 1;
10664         unsigned long CSGTRGDR : 1;
10665         unsigned long CSGTRGCF : 1;
10666         unsigned long CSGTRGCR : 1;
10667         unsigned long CSGTRGBF : 1;
10668         unsigned long CSGTRGBR : 1;
10669         unsigned long CSGTRGAF : 1;
10670         unsigned long CSGTRGAR : 1;
10671 #endif
10672     } BIT;
10673     } GTCSSR;
10674     union {
10675         unsigned long LONG;
```

```

10676     struct {
10677
10678 #ifdef __RX_LITTLE_ENDIAN__
10679     unsigned long USGTRGAR : 1;
10680     unsigned long USGTRGAF : 1;
10681     unsigned long USGTRGBR : 1;
10682     unsigned long USGTRGBF : 1;
10683     unsigned long USGTRGCR : 1;
10684     unsigned long USGTRGCF : 1;
10685     unsigned long USGTRGDR : 1;
10686     unsigned long USGTRGDF : 1;
10687     unsigned long USCARBL : 1;
10688     unsigned long USCARBH : 1;
10689     unsigned long USCAFBL : 1;
10690     unsigned long USCAFBH : 1;
10691     unsigned long USCBRAL : 1;
10692     unsigned long USCBRAH : 1;
10693     unsigned long USCBFAL : 1;
10694     unsigned long USCBFAH : 1;
10695     unsigned long USELCA : 1;
10696     unsigned long USELCB : 1;
10697     unsigned long USELCC : 1;
10698     unsigned long USELCD : 1;
10699     unsigned long USELCE : 1;
10700     unsigned long USELCF : 1;
10701     unsigned long USELCG : 1;
10702     unsigned long USELCH : 1;
10703     unsigned long : 8;
10704 #else
10705     unsigned long : 8;
10706     unsigned long USELCH : 1;
10707     unsigned long USELCG : 1;
10708     unsigned long USELCF : 1;
10709     unsigned long USELCE : 1;
10710     unsigned long USELCD : 1;
10711     unsigned long USELCC : 1;
10712     unsigned long USELCB : 1;
10713     unsigned long USELCA : 1;
10714     unsigned long USCBFAH : 1;
10715     unsigned long USCBFAL : 1;
10716     unsigned long USCBRAH : 1;
10717     unsigned long USCBRAL : 1;
10718     unsigned long USCAFBH : 1;
10719     unsigned long USCAFBL : 1;
10720     unsigned long USCARBH : 1;
10721     unsigned long USCARBL : 1;
10722     unsigned long USGTRGDF : 1;
10723     unsigned long USGTRGDR : 1;
10724     unsigned long USGTRGCF : 1;
10725     unsigned long USGTRGCR : 1;
10726     unsigned long USGTRGBF : 1;
10727     unsigned long USGTRGBR : 1;
10728     unsigned long USGTRGAF : 1;
10729     unsigned long USGTRGAR : 1;
10730 #endif
10731     } BIT;
10732     } GTUPSR;
10733     union {
10734         unsigned long LONG;
10735         struct {
10736
10737 #ifdef __RX_LITTLE_ENDIAN__
10738         unsigned long DSGTRGAR : 1;
10739         unsigned long DSGTRGAF : 1;
10740         unsigned long DSGTRGBR : 1;
10741         unsigned long DSGTRGBF : 1;
10742         unsigned long DSGTRGCR : 1;
10743         unsigned long DSGTRGCF : 1;
10744         unsigned long DSGTRGDR : 1;
10745         unsigned long DSGTRGDF : 1;
10746         unsigned long DSCARBL : 1;
10747         unsigned long DSCARBH : 1;
10748         unsigned long DSCAFBL : 1;
10749         unsigned long DSCAFBH : 1;
10750         unsigned long DSCBRAL : 1;
10751         unsigned long DSCBRAH : 1;
10752         unsigned long DSCBFAL : 1;
10753         unsigned long DSCBFAH : 1;
10754         unsigned long DSELCA : 1;
10755         unsigned long DSELCB : 1;
10756         unsigned long DSELCC : 1;
10757         unsigned long DSELCD : 1;
10758         unsigned long DSELCE : 1;
10759         unsigned long DSELCF : 1;
10760         unsigned long DSELCG : 1;
10761         unsigned long DSELCH : 1;
10762         unsigned long : 8;

```

```

10763 #else
10764     unsigned long : 8;
10765     unsigned long DSELCH : 1;
10766     unsigned long DSELCHG : 1;
10767     unsigned long DSELCHF : 1;
10768     unsigned long DSELCE : 1;
10769     unsigned long DSELCD : 1;
10770     unsigned long DSELCC : 1;
10771     unsigned long DSELCEB : 1;
10772     unsigned long DSELCA : 1;
10773     unsigned long DSCBFAH : 1;
10774     unsigned long DSCBFAL : 1;
10775     unsigned long DSCBRAH : 1;
10776     unsigned long DSCBRAL : 1;
10777     unsigned long DSCAFBH : 1;
10778     unsigned long DSCAFBL : 1;
10779     unsigned long DSCARBH : 1;
10780     unsigned long DSCARBL : 1;
10781     unsigned long DSGTRGDF : 1;
10782     unsigned long DSGTRGDR : 1;
10783     unsigned long DSGTRGCF : 1;
10784     unsigned long DSGTRGCR : 1;
10785     unsigned long DSGTRGBF : 1;
10786     unsigned long DSGTRGBR : 1;
10787     unsigned long DSGTRGAF : 1;
10788     unsigned long DSGTRGAR : 1;
10789 #endif
10790 } BIT;
10791 } GTDNSR;
10792 union {
10793     unsigned long LONG;
10794     struct {
10795
10796 #ifdef __RX_LITTLE_ENDIAN__
10797     unsigned long ASGTRGAR : 1;
10798     unsigned long ASGTRGAF : 1;
10799     unsigned long ASGTRGBR : 1;
10800     unsigned long ASGTRGBF : 1;
10801     unsigned long ASGTRGCR : 1;
10802     unsigned long ASGTRGCF : 1;
10803     unsigned long ASGTRGDR : 1;
10804     unsigned long ASGTRGDF : 1;
10805     unsigned long ASCARBL : 1;
10806     unsigned long ASCARBH : 1;
10807     unsigned long ASCAFBL : 1;
10808     unsigned long ASCAFBH : 1;
10809     unsigned long ASCBRAL : 1;
10810     unsigned long ASCBRAH : 1;
10811     unsigned long ASCBFAL : 1;
10812     unsigned long ASCBFAH : 1;
10813     unsigned long ASELCA : 1;
10814     unsigned long ASELCEB : 1;
10815     unsigned long ASELCC : 1;
10816     unsigned long ASELCD : 1;
10817     unsigned long ASELCE : 1;
10818     unsigned long ASELCHF : 1;
10819     unsigned long ASELCHG : 1;
10820     unsigned long ASELCH : 1;
10821     unsigned long : 8;
10822 #else
10823     unsigned long : 8;
10824     unsigned long ASELCH : 1;
10825     unsigned long ASELCHG : 1;
10826     unsigned long ASELCHF : 1;
10827     unsigned long ASELCE : 1;
10828     unsigned long ASELCD : 1;
10829     unsigned long ASELCC : 1;
10830     unsigned long ASELCEB : 1;
10831     unsigned long ASELCA : 1;
10832     unsigned long ASCBFAH : 1;
10833     unsigned long ASCBFAL : 1;
10834     unsigned long ASCBRAH : 1;
10835     unsigned long ASCBRAL : 1;
10836     unsigned long ASCAFBH : 1;
10837     unsigned long ASCAFBL : 1;
10838     unsigned long ASCARBH : 1;
10839     unsigned long ASCARBL : 1;
10840     unsigned long ASGTRGDF : 1;
10841     unsigned long ASGTRGDR : 1;
10842     unsigned long ASGTRGCF : 1;
10843     unsigned long ASGTRGCR : 1;
10844     unsigned long ASGTRGBF : 1;
10845     unsigned long ASGTRGBR : 1;
10846     unsigned long ASGTRGAF : 1;
10847     unsigned long ASGTRGAR : 1;
10848 #endif
10849     } BIT;

```

```

10850     } GTICASR;
10851     union {
10852         unsigned long LONG;
10853         struct {
10854
10855 #ifdef __RX_LITTLE_ENDIAN__
10856         unsigned long BSGTRGAR : 1;
10857         unsigned long BSGTRGAF : 1;
10858         unsigned long BSGTRGBR : 1;
10859         unsigned long BSGTRGBF : 1;
10860         unsigned long BSGTRGCR : 1;
10861         unsigned long BSGTRGCF : 1;
10862         unsigned long BSGTRGDR : 1;
10863         unsigned long BSGTRGDF : 1;
10864         unsigned long BSCARBL : 1;
10865         unsigned long BSCARBH : 1;
10866         unsigned long BSCAFBL : 1;
10867         unsigned long BSCAFBH : 1;
10868         unsigned long BSCBRAL : 1;
10869         unsigned long BSCBRAH : 1;
10870         unsigned long BSCBFAL : 1;
10871         unsigned long BSCBFAH : 1;
10872         unsigned long BSELCA : 1;
10873         unsigned long BSELCB : 1;
10874         unsigned long BSELCC : 1;
10875         unsigned long BSELCD : 1;
10876         unsigned long BSELCE : 1;
10877         unsigned long BSELCF : 1;
10878         unsigned long BSELCG : 1;
10879         unsigned long BSELCH : 1;
10880         unsigned long : 8;
10881 #else
10882         unsigned long : 8;
10883         unsigned long BSELCH : 1;
10884         unsigned long BSELCG : 1;
10885         unsigned long BSELCF : 1;
10886         unsigned long BSELCE : 1;
10887         unsigned long BSELCD : 1;
10888         unsigned long BSELCC : 1;
10889         unsigned long BSELCB : 1;
10890         unsigned long BSELCA : 1;
10891         unsigned long BSCBFAH : 1;
10892         unsigned long BSCBFAL : 1;
10893         unsigned long BSCBRAH : 1;
10894         unsigned long BSCBRAL : 1;
10895         unsigned long BSCAFBH : 1;
10896         unsigned long BSCAFBL : 1;
10897         unsigned long BSCARBH : 1;
10898         unsigned long BSCARBL : 1;
10899         unsigned long BSGTRGDF : 1;
10900         unsigned long BSGTRGDR : 1;
10901         unsigned long BSGTRGCF : 1;
10902         unsigned long BSGTRGCR : 1;
10903         unsigned long BSGTRGBF : 1;
10904         unsigned long BSGTRGBR : 1;
10905         unsigned long BSGTRGAF : 1;
10906         unsigned long BSGTRGAR : 1;
10907 #endif
10908     } BIT;
10909     } GTICBSR;
10910     union {
10911         unsigned long LONG;
10912         struct {
10913
10914 #ifdef __RX_LITTLE_ENDIAN__
10915         unsigned long CST : 1;
10916         unsigned long : 7;
10917         unsigned long ICDS : 1;
10918         unsigned long : 7;
10919         unsigned long MD : 3;
10920         unsigned long : 4;
10921         unsigned long TPCS : 4;
10922         unsigned long : 5;
10923 #else
10924         unsigned long : 5;
10925         unsigned long TPCS : 4;
10926         unsigned long : 4;
10927         unsigned long MD : 3;
10928         unsigned long : 7;
10929         unsigned long ICDS : 1;
10930         unsigned long : 7;
10931         unsigned long CST : 1;
10932 #endif
10933     } BIT;
10934     } GTCR;
10935     union {
10936         unsigned long LONG;

```

```

10937     struct {
10938
10939 #ifdef __RX_LITTLE_ENDIAN__
10940     unsigned long UD : 1;
10941     unsigned long UDF : 1;
10942     unsigned long : 14;
10943     unsigned long OADTY : 2;
10944     unsigned long OADTYF : 1;
10945     unsigned long OADTYR : 1;
10946     unsigned long : 4;
10947     unsigned long OBDTY : 2;
10948     unsigned long OBDTYF : 1;
10949     unsigned long OBDTYR : 1;
10950     unsigned long : 4;
10951 #else
10952     unsigned long : 4;
10953     unsigned long OBDTYR : 1;
10954     unsigned long OBDTYF : 1;
10955     unsigned long OBDTY : 2;
10956     unsigned long : 4;
10957     unsigned long OADTYR : 1;
10958     unsigned long OADTYF : 1;
10959     unsigned long OADTY : 2;
10960     unsigned long : 14;
10961     unsigned long UDF : 1;
10962     unsigned long UD : 1;
10963 #endif
10964     } BIT;
10965     } GTUDDTYC;
10966     union {
10967         unsigned long LONG;
10968     struct {
10969
10970 #ifdef __RX_LITTLE_ENDIAN__
10971     unsigned long GTIOA : 5;
10972     unsigned long : 1;
10973     unsigned long OADFLT : 1;
10974     unsigned long OAHLA : 1;
10975     unsigned long OAE : 1;
10976     unsigned long OADF : 2;
10977     unsigned long : 2;
10978     unsigned long NFAEN : 1;
10979     unsigned long NFCSA : 2;
10980     unsigned long GTIOB : 5;
10981     unsigned long : 1;
10982     unsigned long OBDFLT : 1;
10983     unsigned long OBHLA : 1;
10984     unsigned long OBE : 1;
10985     unsigned long OBDF : 2;
10986     unsigned long : 2;
10987     unsigned long NFBEN : 1;
10988     unsigned long NFCSB : 2;
10989 #else
10990     unsigned long NFCSB : 2;
10991     unsigned long NFBEN : 1;
10992     unsigned long : 2;
10993     unsigned long OBDF : 2;
10994     unsigned long OBE : 1;
10995     unsigned long OBHLA : 1;
10996     unsigned long OBDFLT : 1;
10997     unsigned long : 1;
10998     unsigned long GTIOB : 5;
10999     unsigned long NFCSA : 2;
11000     unsigned long NFAEN : 1;
11001     unsigned long : 2;
11002     unsigned long OADF : 2;
11003     unsigned long OAE : 1;
11004     unsigned long OAHLA : 1;
11005     unsigned long OADFLT : 1;
11006     unsigned long : 1;
11007     unsigned long GTIOA : 5;
11008 #endif
11009     } BIT;
11010     } GTIOR;
11011     union {
11012         unsigned long LONG;
11013     struct {
11014
11015 #ifdef __RX_LITTLE_ENDIAN__
11016     unsigned long GTINTA : 1;
11017     unsigned long GTINTB : 1;
11018     unsigned long GTINTC : 1;
11019     unsigned long GTINTD : 1;
11020     unsigned long GTINTE : 1;
11021     unsigned long GTINTF : 1;
11022     unsigned long GTINTPR : 2;
11023     unsigned long : 8;

```

```

11024     unsigned long ADTRAUEN : 1;
11025     unsigned long ADTRADEN : 1;
11026     unsigned long ADTRBUEN : 1;
11027     unsigned long ADTRBDEN : 1;
11028     unsigned long      : 4;
11029     unsigned long GRP : 2;
11030     unsigned long      : 2;
11031     unsigned long GRPDTE : 1;
11032     unsigned long GRPABH : 1;
11033     unsigned long GRPABL : 1;
11034     unsigned long      : 1;
11035 #else
11036     unsigned long      : 1;
11037     unsigned long GRPABL : 1;
11038     unsigned long GRPABH : 1;
11039     unsigned long GRPDTE : 1;
11040     unsigned long      : 2;
11041     unsigned long GRP : 2;
11042     unsigned long      : 4;
11043     unsigned long ADTRBDEN : 1;
11044     unsigned long ADTRBUEN : 1;
11045     unsigned long ADTRADEN : 1;
11046     unsigned long ADTRAUEN : 1;
11047     unsigned long      : 8;
11048     unsigned long GTINTPR : 2;
11049     unsigned long GTINTF : 1;
11050     unsigned long GTINTE : 1;
11051     unsigned long GTINTD : 1;
11052     unsigned long GTINTC : 1;
11053     unsigned long GTINTB : 1;
11054     unsigned long GTINTA : 1;
11055 #endif
11056     } BIT;
11057     } GTINTAD;
11058     union {
11059         unsigned long LONG;
11060         struct {
11061
11062 #ifdef __RX_LITTLE_ENDIAN__
11063         unsigned long      : 8;
11064         unsigned long ITCNT : 3;
11065         unsigned long      : 4;
11066         unsigned long TUCF : 1;
11067         unsigned long ADTRAUF : 1;
11068         unsigned long ADTRADF : 1;
11069         unsigned long ADTRBUF : 1;
11070         unsigned long ADTRBDF : 1;
11071         unsigned long      : 4;
11072         unsigned long ODF : 1;
11073         unsigned long      : 3;
11074         unsigned long DTEF : 1;
11075         unsigned long OABHF : 1;
11076         unsigned long OABLF : 1;
11077         unsigned long      : 1;
11078 #else
11079         unsigned long      : 1;
11080         unsigned long OABLF : 1;
11081         unsigned long OABHF : 1;
11082         unsigned long DTEF : 1;
11083         unsigned long      : 3;
11084         unsigned long ODF : 1;
11085         unsigned long      : 4;
11086         unsigned long ADTRBDF : 1;
11087         unsigned long ADTRBUF : 1;
11088         unsigned long ADTRADF : 1;
11089         unsigned long ADTRAUF : 1;
11090         unsigned long TUCF : 1;
11091         unsigned long      : 4;
11092         unsigned long ITCNT : 3;
11093         unsigned long      : 8;
11094 #endif
11095         } BIT;
11096         } GTST;
11097         union {
11098             unsigned long LONG;
11099             struct {
11100
11101 #ifdef __RX_LITTLE_ENDIAN__
11102             unsigned long BD : 4;
11103             unsigned long      : 4;
11104             unsigned long DBRTECA : 1;
11105             unsigned long      : 1;
11106             unsigned long DBRTECB : 1;
11107             unsigned long      : 5;
11108             unsigned long CCRA : 2;
11109             unsigned long CCRB : 2;
11110             unsigned long PR : 2;

```

```

11111         unsigned long CCRSWT : 1;
11112         unsigned long : 1;
11113         unsigned long ADTTA : 2;
11114         unsigned long ADTDA : 1;
11115         unsigned long : 1;
11116         unsigned long ADTTB : 2;
11117         unsigned long ADTDB : 1;
11118         unsigned long : 1;
11119 #else
11120         unsigned long : 1;
11121         unsigned long ADTDB : 1;
11122         unsigned long ADTTB : 2;
11123         unsigned long : 1;
11124         unsigned long ADTDA : 1;
11125         unsigned long ADTTA : 2;
11126         unsigned long : 1;
11127         unsigned long CCRSWT : 1;
11128         unsigned long PR : 2;
11129         unsigned long CCRB : 2;
11130         unsigned long CCRA : 2;
11131         unsigned long : 5;
11132         unsigned long DBRTECB : 1;
11133         unsigned long : 1;
11134         unsigned long DBRTECA : 1;
11135         unsigned long : 4;
11136         unsigned long BD : 4;
11137 #endif
11138     } BIT;
11139     } GTBER;
11140     union {
11141         unsigned long LONG;
11142         struct {
11143
11144 #ifdef __RX_LITTLE_ENDIAN__
11145         unsigned long ITLA : 1;
11146         unsigned long ITLB : 1;
11147         unsigned long ITLC : 1;
11148         unsigned long ITLD : 1;
11149         unsigned long ITLE : 1;
11150         unsigned long ITLF : 1;
11151         unsigned long IVTC : 2;
11152         unsigned long IVTT : 3;
11153         unsigned long : 1;
11154         unsigned long ADTAL : 1;
11155         unsigned long : 1;
11156         unsigned long ADTBL : 1;
11157         unsigned long : 17;
11158 #else
11159         unsigned long : 17;
11160         unsigned long ADTBL : 1;
11161         unsigned long : 1;
11162         unsigned long ADTAL : 1;
11163         unsigned long : 1;
11164         unsigned long IVTT : 3;
11165         unsigned long IVTC : 2;
11166         unsigned long ITLF : 1;
11167         unsigned long ITLE : 1;
11168         unsigned long ITLD : 1;
11169         unsigned long ITLC : 1;
11170         unsigned long ITLB : 1;
11171         unsigned long ITLA : 1;
11172 #endif
11173     } BIT;
11174     } GTITC;
11175     unsigned long GTCNT;
11176     unsigned long GTCCRA;
11177     unsigned long GTCCRB;
11178     unsigned long GTCCRC;
11179     unsigned long GTCCRE;
11180     unsigned long GTCCRD;
11181     unsigned long GTCCRF;
11182     unsigned long GTPR;
11183     unsigned long GTPBR;
11184     unsigned long GTPDBR;
11185     unsigned long GTADTRA;
11186     unsigned long GTADTBRA;
11187     unsigned long GTADTDBRA;
11188     unsigned long GTADTRB;
11189     unsigned long GTADTDBRB;
11190     unsigned long GTADTDBRB;
11191     union {
11192         unsigned long LONG;
11193         struct {
11194
11195 #ifdef __RX_LITTLE_ENDIAN__
11196         unsigned long TDE : 1;
11197         unsigned long : 3;

```

```

11198         unsigned long TDBUE : 1;
11199         unsigned long TDBDE : 1;
11200         unsigned long : 2;
11201         unsigned long TDFER : 1;
11202         unsigned long : 23;
11203 #else
11204         unsigned long : 23;
11205         unsigned long TDFER : 1;
11206         unsigned long : 2;
11207         unsigned long TDBDE : 1;
11208         unsigned long TDBUE : 1;
11209         unsigned long : 3;
11210         unsigned long TDE : 1;
11211 #endif
11212     } BIT;
11213 } GTDTCR;
11214 unsigned long GTDVU;
11215 unsigned long GTDVD;
11216 unsigned long GTDBU;
11217 unsigned long GTDBD;
11218 union {
11219     unsigned long LONG;
11220     struct {
11221
11222 #ifdef __RX_LITTLE_ENDIAN__
11223         unsigned long SOS : 2;
11224         unsigned long : 30;
11225 #else
11226         unsigned long : 30;
11227         unsigned long SOS : 2;
11228 #endif
11229     } BIT;
11230 } GTSOS;
11231 union {
11232     unsigned long LONG;
11233     struct {
11234
11235 #ifdef __RX_LITTLE_ENDIAN__
11236         unsigned long SOTR : 1;
11237         unsigned long : 31;
11238 #else
11239         unsigned long : 31;
11240         unsigned long SOTR : 1;
11241 #endif
11242     } BIT;
11243 } GTSOTR;
11244 union {
11245     unsigned long LONG;
11246     struct {
11247
11248 #ifdef __RX_LITTLE_ENDIAN__
11249         unsigned long ADSMS0 : 2;
11250         unsigned long : 6;
11251         unsigned long ADSMEN0 : 1;
11252         unsigned long : 7;
11253         unsigned long ADSMS1 : 2;
11254         unsigned long : 6;
11255         unsigned long ADSMEN1 : 1;
11256         unsigned long : 7;
11257 #else
11258         unsigned long : 7;
11259         unsigned long ADSMEN1 : 1;
11260         unsigned long : 6;
11261         unsigned long ADSMS1 : 2;
11262         unsigned long : 7;
11263         unsigned long ADSMEN0 : 1;
11264         unsigned long : 6;
11265         unsigned long ADSMS0 : 2;
11266 #endif
11267     } BIT;
11268 } GTADSMR;
11269 union {
11270     unsigned long LONG;
11271     struct {
11272
11273 #ifdef __RX_LITTLE_ENDIAN__
11274         unsigned long EIVTC1 : 2;
11275         unsigned long : 2;
11276         unsigned long EIVTT1 : 4;
11277         unsigned long : 4;
11278         unsigned long EITCNT1 : 4;
11279         unsigned long EIVTC2 : 2;
11280         unsigned long : 2;
11281         unsigned long EIVTT2 : 4;
11282         unsigned long EITCNT2IV : 4;
11283         unsigned long EITCNT2 : 4;
11284 #else

```

```

11285         unsigned long EITCNT2 : 4;
11286         unsigned long EITCNT2IV : 4;
11287         unsigned long EIVTT2 : 4;
11288         unsigned long : 2;
11289         unsigned long EIVTC2 : 2;
11290         unsigned long EITCNT1 : 4;
11291         unsigned long : 4;
11292         unsigned long EIVTT1 : 4;
11293         unsigned long : 2;
11294         unsigned long EIVTC1 : 2;
11295     #endif
11296     } BIT;
11297     } GTEITC;
11298     union {
11299         unsigned long LONG;
11300     struct {
11301
11302     #ifdef __RX_LITTLE_ENDIAN__
11303         unsigned long EITLA : 3;
11304         unsigned long : 1;
11305         unsigned long EITLB : 3;
11306         unsigned long : 1;
11307         unsigned long EITLC : 3;
11308         unsigned long : 1;
11309         unsigned long EITLD : 3;
11310         unsigned long : 1;
11311         unsigned long EITLE : 3;
11312         unsigned long : 1;
11313         unsigned long EITLF : 3;
11314         unsigned long : 1;
11315         unsigned long EITLV : 3;
11316         unsigned long : 1;
11317         unsigned long EITLU : 3;
11318         unsigned long : 1;
11319     #else
11320         unsigned long : 1;
11321         unsigned long EITLU : 3;
11322         unsigned long : 1;
11323         unsigned long EITLV : 3;
11324         unsigned long : 1;
11325         unsigned long EITLF : 3;
11326         unsigned long : 1;
11327         unsigned long EITLE : 3;
11328         unsigned long : 1;
11329         unsigned long EITLD : 3;
11330         unsigned long : 1;
11331         unsigned long EITLC : 3;
11332         unsigned long : 1;
11333         unsigned long EITLB : 3;
11334         unsigned long : 1;
11335         unsigned long EITLA : 3;
11336     #endif
11337     } BIT;
11338     } GTEITLI1;
11339     union {
11340         unsigned long LONG;
11341     struct {
11342
11343     #ifdef __RX_LITTLE_ENDIAN__
11344         unsigned long EADTAL : 3;
11345         unsigned long : 1;
11346         unsigned long EADTBL : 3;
11347         unsigned long : 25;
11348     #else
11349         unsigned long : 25;
11350         unsigned long EADTBL : 3;
11351         unsigned long : 1;
11352         unsigned long EADTAL : 3;
11353     #endif
11354     } BIT;
11355     } GTEITLI2;
11356     union {
11357         unsigned long LONG;
11358     struct {
11359
11360     #ifdef __RX_LITTLE_ENDIAN__
11361         unsigned long EBTLCAL : 3;
11362         unsigned long : 1;
11363         unsigned long EBTLCB : 3;
11364         unsigned long : 1;
11365         unsigned long EBTLPAL : 3;
11366         unsigned long : 5;
11367         unsigned long EBTLADA : 3;
11368         unsigned long : 1;
11369         unsigned long EBTLADB : 3;
11370         unsigned long : 1;
11371         unsigned long EBTLDVU : 3;

```

```

11372         unsigned long : 1;
11373         unsigned long EBTLDVD : 3;
11374         unsigned long : 1;
11375     #else
11376         unsigned long : 1;
11377         unsigned long EBTLDVD : 3;
11378         unsigned long : 1;
11379         unsigned long EBTLDVU : 3;
11380         unsigned long : 1;
11381         unsigned long EBTLADB : 3;
11382         unsigned long : 1;
11383         unsigned long EBTLADA : 3;
11384         unsigned long : 5;
11385         unsigned long EBTLPUR : 3;
11386         unsigned long : 1;
11387         unsigned long EBTLCB : 3;
11388         unsigned long : 1;
11389         unsigned long EBTLCAL : 3;
11390     #endif
11391     } BIT;
11392     } GTEITLB;
11393     char      wk0[24];
11394     union {
11395         unsigned long LONG;
11396         struct {
11397
11398     #ifdef __RX_LITTLE_ENDIAN__
11399         unsigned long SECSEL0 : 1;
11400         unsigned long SECSEL1 : 1;
11401         unsigned long SECSEL2 : 1;
11402         unsigned long SECSEL3 : 1;
11403         unsigned long : 28;
11404     #else
11405         unsigned long : 28;
11406         unsigned long SECSEL3 : 1;
11407         unsigned long SECSEL2 : 1;
11408         unsigned long SECSEL1 : 1;
11409         unsigned long SECSEL0 : 1;
11410     #endif
11411     } BIT;
11412     } GTSECSR;
11413     union {
11414         unsigned long LONG;
11415         struct {
11416
11417     #ifdef __RX_LITTLE_ENDIAN__
11418         unsigned long SBDCE : 1;
11419         unsigned long SBDPE : 1;
11420         unsigned long SBDAE : 1;
11421         unsigned long SBDDE : 1;
11422         unsigned long : 4;
11423         unsigned long SBDCE : 1;
11424         unsigned long SBDPE : 1;
11425         unsigned long SBDAD : 1;
11426         unsigned long SBDDE : 1;
11427         unsigned long : 20;
11428     #else
11429         unsigned long : 20;
11430         unsigned long SBDDE : 1;
11431         unsigned long SBDAD : 1;
11432         unsigned long SBDPE : 1;
11433         unsigned long SBDCE : 1;
11434         unsigned long : 4;
11435         unsigned long SBDDE : 1;
11436         unsigned long SBDAE : 1;
11437         unsigned long SBDPE : 1;
11438         unsigned long SBDCE : 1;
11439     #endif
11440     } BIT;
11441     } GTSECR;
11442 } st_gptw_t;
11443
11444 typedef struct st_icu {
11445     union {
11446         unsigned char BYTE;
11447         struct {
11448
11449     #ifdef __RX_LITTLE_ENDIAN__
11450         unsigned char IR : 1;
11451         unsigned char : 7;
11452     #else
11453         unsigned char : 7;
11454         unsigned char IR : 1;
11455     #endif
11456     } BIT;
11457     } IR[256];
11458     union {

```

```

11459     unsigned char BYTE;
11460     struct {
11461
11462 #ifdef __RX_LITTLE_ENDIAN__
11463     unsigned char DTCE : 1;
11464     unsigned char : 7;
11465 #else
11466     unsigned char : 7;
11467     unsigned char DTCE : 1;
11468 #endif
11469     } BIT;
11470     } DTCE[256];
11471     union {
11472     unsigned char BYTE;
11473     struct {
11474
11475 #ifdef __RX_LITTLE_ENDIAN__
11476     unsigned char IEN0 : 1;
11477     unsigned char IEN1 : 1;
11478     unsigned char IEN2 : 1;
11479     unsigned char IEN3 : 1;
11480     unsigned char IEN4 : 1;
11481     unsigned char IEN5 : 1;
11482     unsigned char IEN6 : 1;
11483     unsigned char IEN7 : 1;
11484 #else
11485     unsigned char IEN7 : 1;
11486     unsigned char IEN6 : 1;
11487     unsigned char IEN5 : 1;
11488     unsigned char IEN4 : 1;
11489     unsigned char IEN3 : 1;
11490     unsigned char IEN2 : 1;
11491     unsigned char IEN1 : 1;
11492     unsigned char IEN0 : 1;
11493 #endif
11494     } BIT;
11495     } IER[32];
11496     char wk0[192];
11497     union {
11498     unsigned char BYTE;
11499     struct {
11500
11501 #ifdef __RX_LITTLE_ENDIAN__
11502     unsigned char SWINT : 1;
11503     unsigned char : 7;
11504 #else
11505     unsigned char : 7;
11506     unsigned char SWINT : 1;
11507 #endif
11508     } BIT;
11509     } SWINTR;
11510     union {
11511     unsigned char BYTE;
11512     struct {
11513
11514 #ifdef __RX_LITTLE_ENDIAN__
11515     unsigned char SWINT2 : 1;
11516     unsigned char : 7;
11517 #else
11518     unsigned char : 7;
11519     unsigned char SWINT2 : 1;
11520 #endif
11521     } BIT;
11522     } SWINT2R;
11523     char wk1[14];
11524     union {
11525     unsigned short WORD;
11526     struct {
11527
11528 #ifdef __RX_LITTLE_ENDIAN__
11529     unsigned short FVCT : 8;
11530     unsigned short : 7;
11531     unsigned short FIEN : 1;
11532 #else
11533     unsigned short FIEN : 1;
11534     unsigned short : 7;
11535     unsigned short FVCT : 8;
11536 #endif
11537     } BIT;
11538     } FIR;
11539     char wk2[14];
11540     union {
11541     unsigned char BYTE;
11542     struct {
11543
11544 #ifdef __RX_LITTLE_ENDIAN__
11545     unsigned char IPR : 4;

```

```

11546 unsigned char : 4;
11547 #else
11548 unsigned char : 4;
11549 unsigned char IPR : 4;
11550 #endif
11551 } BIT;
11552 } IPR[256];
11553 unsigned char DMRSR0;
11554 char wk3[3];
11555 unsigned char DMRSR1;
11556 char wk4[3];
11557 unsigned char DMRSR2;
11558 char wk5[3];
11559 unsigned char DMRSR3;
11560 char wk6[3];
11561 unsigned char DMRSR4;
11562 char wk7[3];
11563 unsigned char DMRSR5;
11564 char wk8[3];
11565 unsigned char DMRSR6;
11566 char wk9[3];
11567 unsigned char DMRSR7;
11568 char wk10[227];
11569 union {
11570 unsigned char BYTE;
11571 struct {
11572
11573 #ifdef __RX_LITTLE_ENDIAN__
11574 unsigned char : 2;
11575 unsigned char IRQMD : 2;
11576 unsigned char : 4;
11577 #else
11578 unsigned char : 4;
11579 unsigned char IRQMD : 2;
11580 unsigned char : 2;
11581 #endif
11582 } BIT;
11583 } IRQCR[16];
11584 char wk11[16];
11585 union {
11586 unsigned char BYTE;
11587 struct {
11588
11589 #ifdef __RX_LITTLE_ENDIAN__
11590 unsigned char FLTEN0 : 1;
11591 unsigned char FLTEN1 : 1;
11592 unsigned char FLTEN2 : 1;
11593 unsigned char FLTEN3 : 1;
11594 unsigned char FLTEN4 : 1;
11595 unsigned char FLTEN5 : 1;
11596 unsigned char FLTEN6 : 1;
11597 unsigned char FLTEN7 : 1;
11598 #else
11599 unsigned char FLTEN7 : 1;
11600 unsigned char FLTEN6 : 1;
11601 unsigned char FLTEN5 : 1;
11602 unsigned char FLTEN4 : 1;
11603 unsigned char FLTEN3 : 1;
11604 unsigned char FLTEN2 : 1;
11605 unsigned char FLTEN1 : 1;
11606 unsigned char FLTEN0 : 1;
11607 #endif
11608 } BIT;
11609 } IRQFLTE0;
11610 union {
11611 unsigned char BYTE;
11612 struct {
11613
11614 #ifdef __RX_LITTLE_ENDIAN__
11615 unsigned char FLTEN8 : 1;
11616 unsigned char FLTEN9 : 1;
11617 unsigned char FLTEN10 : 1;
11618 unsigned char FLTEN11 : 1;
11619 unsigned char FLTEN12 : 1;
11620 unsigned char FLTEN13 : 1;
11621 unsigned char FLTEN14 : 1;
11622 unsigned char FLTEN15 : 1;
11623 #else
11624 unsigned char FLTEN15 : 1;
11625 unsigned char FLTEN14 : 1;
11626 unsigned char FLTEN13 : 1;
11627 unsigned char FLTEN12 : 1;
11628 unsigned char FLTEN11 : 1;
11629 unsigned char FLTEN10 : 1;
11630 unsigned char FLTEN9 : 1;
11631 unsigned char FLTEN8 : 1;
11632 #endif
11633 } BIT;

```

```

11633     } BIT;
11634     } IRQFLTE1;
11635     char          wk12[6];
11636     union {
11637         unsigned short WORD;
11638         struct {
11639
11640 #ifdef __RX_LITTLE_ENDIAN__
11641         unsigned short FCLKSEL0 : 2;
11642         unsigned short FCLKSEL1 : 2;
11643         unsigned short FCLKSEL2 : 2;
11644         unsigned short FCLKSEL3 : 2;
11645         unsigned short FCLKSEL4 : 2;
11646         unsigned short FCLKSEL5 : 2;
11647         unsigned short FCLKSEL6 : 2;
11648         unsigned short FCLKSEL7 : 2;
11649 #else
11650         unsigned short FCLKSEL7 : 2;
11651         unsigned short FCLKSEL6 : 2;
11652         unsigned short FCLKSEL5 : 2;
11653         unsigned short FCLKSEL4 : 2;
11654         unsigned short FCLKSEL3 : 2;
11655         unsigned short FCLKSEL2 : 2;
11656         unsigned short FCLKSEL1 : 2;
11657         unsigned short FCLKSEL0 : 2;
11658 #endif
11659     } BIT;
11660     } IRQFLTC0;
11661     union {
11662         unsigned short WORD;
11663         struct {
11664
11665 #ifdef __RX_LITTLE_ENDIAN__
11666         unsigned short FCLKSEL8 : 2;
11667         unsigned short FCLKSEL9 : 2;
11668         unsigned short FCLKSEL10 : 2;
11669         unsigned short FCLKSEL11 : 2;
11670         unsigned short FCLKSEL12 : 2;
11671         unsigned short FCLKSEL13 : 2;
11672         unsigned short FCLKSEL14 : 2;
11673         unsigned short FCLKSEL15 : 2;
11674 #else
11675         unsigned short FCLKSEL15 : 2;
11676         unsigned short FCLKSEL14 : 2;
11677         unsigned short FCLKSEL13 : 2;
11678         unsigned short FCLKSEL12 : 2;
11679         unsigned short FCLKSEL11 : 2;
11680         unsigned short FCLKSEL10 : 2;
11681         unsigned short FCLKSEL9 : 2;
11682         unsigned short FCLKSEL8 : 2;
11683 #endif
11684     } BIT;
11685     } IRQFLTC1;
11686     char          wk13[84];
11687     union {
11688         unsigned char BYTE;
11689         struct {
11690
11691 #ifdef __RX_LITTLE_ENDIAN__
11692         unsigned char NMIST : 1;
11693         unsigned char OSTST : 1;
11694         unsigned char WDTST : 1;
11695         unsigned char IWDTST : 1;
11696         unsigned char LVD1ST : 1;
11697         unsigned char LVD2ST : 1;
11698         unsigned char EXNMIST : 1;
11699         unsigned char  : 1;
11700 #else
11701         unsigned char  : 1;
11702         unsigned char EXNMIST : 1;
11703         unsigned char LVD2ST : 1;
11704         unsigned char LVD1ST : 1;
11705         unsigned char IWDTST : 1;
11706         unsigned char WDTST : 1;
11707         unsigned char OSTST : 1;
11708         unsigned char NMIST : 1;
11709 #endif
11710     } BIT;
11711     } NMISR;
11712     union {
11713         unsigned char BYTE;
11714         struct {
11715
11716 #ifdef __RX_LITTLE_ENDIAN__
11717         unsigned char NMIEN : 1;
11718         unsigned char OSTEN : 1;
11719         unsigned char WDTEN : 1;

```

```

11720         unsigned char IWDTEN : 1;
11721         unsigned char LVD1EN : 1;
11722         unsigned char LVD2EN : 1;
11723         unsigned char EXNMIEN : 1;
11724         unsigned char : 1;
11725 #else
11726         unsigned char : 1;
11727         unsigned char EXNMIEN : 1;
11728         unsigned char LVD2EN : 1;
11729         unsigned char LVD1EN : 1;
11730         unsigned char IWDTEN : 1;
11731         unsigned char WDTEN : 1;
11732         unsigned char OSTEN : 1;
11733         unsigned char NMIEEN : 1;
11734 #endif
11735     } BIT;
11736     } NMIER;
11737     union {
11738         unsigned char BYTE;
11739         struct {
11740
11741 #ifdef __RX_LITTLE_ENDIAN__
11742         unsigned char NMICLR : 1;
11743         unsigned char OSTCLR : 1;
11744         unsigned char WDTCLR : 1;
11745         unsigned char IWDTCCLR : 1;
11746         unsigned char LVD1CLR : 1;
11747         unsigned char LVD2CLR : 1;
11748         unsigned char : 2;
11749 #else
11750         unsigned char : 2;
11751         unsigned char LVD2CLR : 1;
11752         unsigned char LVD1CLR : 1;
11753         unsigned char IWDTCCLR : 1;
11754         unsigned char WDTCLR : 1;
11755         unsigned char OSTCLR : 1;
11756         unsigned char NMICLR : 1;
11757 #endif
11758     } BIT;
11759     } NMICLR;
11760     union {
11761         unsigned char BYTE;
11762         struct {
11763
11764 #ifdef __RX_LITTLE_ENDIAN__
11765         unsigned char : 3;
11766         unsigned char NMIMD : 1;
11767         unsigned char : 4;
11768 #else
11769         unsigned char : 4;
11770         unsigned char NMIMD : 1;
11771         unsigned char : 3;
11772 #endif
11773     } BIT;
11774     } NMICR;
11775     union {
11776         unsigned char BYTE;
11777         struct {
11778
11779 #ifdef __RX_LITTLE_ENDIAN__
11780         unsigned char RAMST : 1;
11781         unsigned char DPFPUST : 1;
11782         unsigned char : 6;
11783 #else
11784         unsigned char : 6;
11785         unsigned char DPFPUST : 1;
11786         unsigned char RAMST : 1;
11787 #endif
11788     } BIT;
11789     } EXNMISR;
11790     union {
11791         unsigned char BYTE;
11792         struct {
11793
11794 #ifdef __RX_LITTLE_ENDIAN__
11795         unsigned char RAMEN : 1;
11796         unsigned char DPFPUN : 1;
11797         unsigned char : 6;
11798 #else
11799         unsigned char : 6;
11800         unsigned char DPFPUN : 1;
11801         unsigned char RAMEN : 1;
11802 #endif
11803     } BIT;
11804     } EXNMIER;
11805     union {
11806         unsigned char BYTE;

```

```

11807     struct {
11808
11809 #ifdef __RX_LITTLE_ENDIAN__
11810     unsigned char : 1;
11811     unsigned char DPFPUCLR : 1;
11812     unsigned char : 6;
11813 #else
11814     unsigned char : 6;
11815     unsigned char DPFPUCLR : 1;
11816     unsigned char : 1;
11817 #endif
11818     } BIT;
11819     } EXNMICLR;
11820     char      wk14[9];
11821     union {
11822     unsigned char BYTE;
11823     struct {
11824
11825 #ifdef __RX_LITTLE_ENDIAN__
11826     unsigned char NFLTEN : 1;
11827     unsigned char : 7;
11828 #else
11829     unsigned char : 7;
11830     unsigned char NFLTEN : 1;
11831 #endif
11832     } BIT;
11833     } NMIFLTE;
11834     char      wk15[3];
11835     union {
11836     unsigned char BYTE;
11837     struct {
11838
11839 #ifdef __RX_LITTLE_ENDIAN__
11840     unsigned char NFCLKSEL : 2;
11841     unsigned char : 6;
11842 #else
11843     unsigned char : 6;
11844     unsigned char NFCLKSEL : 2;
11845 #endif
11846     } BIT;
11847     } NMIFLTC;
11848     char      wk16[27];
11849     union {
11850     unsigned long LONG;
11851     struct {
11852
11853 #ifdef __RX_LITTLE_ENDIAN__
11854     unsigned long IS0 : 1;
11855     unsigned long IS1 : 1;
11856     unsigned long IS2 : 1;
11857     unsigned long IS3 : 1;
11858     unsigned long IS4 : 1;
11859     unsigned long IS5 : 1;
11860     unsigned long IS6 : 1;
11861     unsigned long IS7 : 1;
11862     unsigned long IS8 : 1;
11863     unsigned long IS9 : 1;
11864     unsigned long IS10 : 1;
11865     unsigned long IS11 : 1;
11866     unsigned long IS12 : 1;
11867     unsigned long IS13 : 1;
11868     unsigned long IS14 : 1;
11869     unsigned long IS15 : 1;
11870     unsigned long IS16 : 1;
11871     unsigned long IS17 : 1;
11872     unsigned long IS18 : 1;
11873     unsigned long IS19 : 1;
11874     unsigned long IS20 : 1;
11875     unsigned long IS21 : 1;
11876     unsigned long IS22 : 1;
11877     unsigned long IS23 : 1;
11878     unsigned long IS24 : 1;
11879     unsigned long IS25 : 1;
11880     unsigned long IS26 : 1;
11881     unsigned long IS27 : 1;
11882     unsigned long IS28 : 1;
11883     unsigned long IS29 : 1;
11884     unsigned long IS30 : 1;
11885     unsigned long IS31 : 1;
11886 #else
11887     unsigned long IS31 : 1;
11888     unsigned long IS30 : 1;
11889     unsigned long IS29 : 1;
11890     unsigned long IS28 : 1;
11891     unsigned long IS27 : 1;
11892     unsigned long IS26 : 1;
11893     unsigned long IS25 : 1;

```

```

11894     unsigned long IS24 : 1;
11895     unsigned long IS23 : 1;
11896     unsigned long IS22 : 1;
11897     unsigned long IS21 : 1;
11898     unsigned long IS20 : 1;
11899     unsigned long IS19 : 1;
11900     unsigned long IS18 : 1;
11901     unsigned long IS17 : 1;
11902     unsigned long IS16 : 1;
11903     unsigned long IS15 : 1;
11904     unsigned long IS14 : 1;
11905     unsigned long IS13 : 1;
11906     unsigned long IS12 : 1;
11907     unsigned long IS11 : 1;
11908     unsigned long IS10 : 1;
11909     unsigned long IS9 : 1;
11910     unsigned long IS8 : 1;
11911     unsigned long IS7 : 1;
11912     unsigned long IS6 : 1;
11913     unsigned long IS5 : 1;
11914     unsigned long IS4 : 1;
11915     unsigned long IS3 : 1;
11916     unsigned long IS2 : 1;
11917     unsigned long IS1 : 1;
11918     unsigned long IS0 : 1;
11919 #endif
11920     } BIT;
11921     } GRPIE0;
11922     union {
11923         unsigned long LONG;
11924         struct {
11925
11926 #ifdef __RX_LITTLE_ENDIAN__
11927         unsigned long EN0 : 1;
11928         unsigned long EN1 : 1;
11929         unsigned long EN2 : 1;
11930         unsigned long EN3 : 1;
11931         unsigned long EN4 : 1;
11932         unsigned long EN5 : 1;
11933         unsigned long EN6 : 1;
11934         unsigned long EN7 : 1;
11935         unsigned long EN8 : 1;
11936         unsigned long EN9 : 1;
11937         unsigned long EN10 : 1;
11938         unsigned long EN11 : 1;
11939         unsigned long EN12 : 1;
11940         unsigned long EN13 : 1;
11941         unsigned long EN14 : 1;
11942         unsigned long EN15 : 1;
11943         unsigned long EN16 : 1;
11944         unsigned long EN17 : 1;
11945         unsigned long EN18 : 1;
11946         unsigned long EN19 : 1;
11947         unsigned long EN20 : 1;
11948         unsigned long EN21 : 1;
11949         unsigned long EN22 : 1;
11950         unsigned long EN23 : 1;
11951         unsigned long EN24 : 1;
11952         unsigned long EN25 : 1;
11953         unsigned long EN26 : 1;
11954         unsigned long EN27 : 1;
11955         unsigned long EN28 : 1;
11956         unsigned long EN29 : 1;
11957         unsigned long EN30 : 1;
11958         unsigned long EN31 : 1;
11959 #else
11960         unsigned long EN31 : 1;
11961         unsigned long EN30 : 1;
11962         unsigned long EN29 : 1;
11963         unsigned long EN28 : 1;
11964         unsigned long EN27 : 1;
11965         unsigned long EN26 : 1;
11966         unsigned long EN25 : 1;
11967         unsigned long EN24 : 1;
11968         unsigned long EN23 : 1;
11969         unsigned long EN22 : 1;
11970         unsigned long EN21 : 1;
11971         unsigned long EN20 : 1;
11972         unsigned long EN19 : 1;
11973         unsigned long EN18 : 1;
11974         unsigned long EN17 : 1;
11975         unsigned long EN16 : 1;
11976         unsigned long EN15 : 1;
11977         unsigned long EN14 : 1;
11978         unsigned long EN13 : 1;
11979         unsigned long EN12 : 1;
11980         unsigned long EN11 : 1;

```

```
11981         unsigned long EN10 : 1;
11982         unsigned long EN9 : 1;
11983         unsigned long EN8 : 1;
11984         unsigned long EN7 : 1;
11985         unsigned long EN6 : 1;
11986         unsigned long EN5 : 1;
11987         unsigned long EN4 : 1;
11988         unsigned long EN3 : 1;
11989         unsigned long EN2 : 1;
11990         unsigned long EN1 : 1;
11991         unsigned long EN0 : 1;
11992     #endif
11993     } BIT;
11994     } GENIE0;
11995     union {
11996         unsigned long LONG;
11997     struct {
11998
11999     #ifdef __RX_LITTLE_ENDIAN__
12000         unsigned long CLR0 : 1;
12001         unsigned long CLR1 : 1;
12002         unsigned long CLR2 : 1;
12003         unsigned long CLR3 : 1;
12004         unsigned long CLR4 : 1;
12005         unsigned long CLR5 : 1;
12006         unsigned long CLR6 : 1;
12007         unsigned long CLR7 : 1;
12008         unsigned long CLR8 : 1;
12009         unsigned long CLR9 : 1;
12010         unsigned long CLR10 : 1;
12011         unsigned long CLR11 : 1;
12012         unsigned long CLR12 : 1;
12013         unsigned long CLR13 : 1;
12014         unsigned long CLR14 : 1;
12015         unsigned long CLR15 : 1;
12016         unsigned long CLR16 : 1;
12017         unsigned long CLR17 : 1;
12018         unsigned long CLR18 : 1;
12019         unsigned long CLR19 : 1;
12020         unsigned long CLR20 : 1;
12021         unsigned long CLR21 : 1;
12022         unsigned long CLR22 : 1;
12023         unsigned long CLR23 : 1;
12024         unsigned long CLR24 : 1;
12025         unsigned long CLR25 : 1;
12026         unsigned long CLR26 : 1;
12027         unsigned long CLR27 : 1;
12028         unsigned long CLR28 : 1;
12029         unsigned long CLR29 : 1;
12030         unsigned long CLR30 : 1;
12031         unsigned long CLR31 : 1;
12032     #else
12033         unsigned long CLR31 : 1;
12034         unsigned long CLR30 : 1;
12035         unsigned long CLR29 : 1;
12036         unsigned long CLR28 : 1;
12037         unsigned long CLR27 : 1;
12038         unsigned long CLR26 : 1;
12039         unsigned long CLR25 : 1;
12040         unsigned long CLR24 : 1;
12041         unsigned long CLR23 : 1;
12042         unsigned long CLR22 : 1;
12043         unsigned long CLR21 : 1;
12044         unsigned long CLR20 : 1;
12045         unsigned long CLR19 : 1;
12046         unsigned long CLR18 : 1;
12047         unsigned long CLR17 : 1;
12048         unsigned long CLR16 : 1;
12049         unsigned long CLR15 : 1;
12050         unsigned long CLR14 : 1;
12051         unsigned long CLR13 : 1;
12052         unsigned long CLR12 : 1;
12053         unsigned long CLR11 : 1;
12054         unsigned long CLR10 : 1;
12055         unsigned long CLR9 : 1;
12056         unsigned long CLR8 : 1;
12057         unsigned long CLR7 : 1;
12058         unsigned long CLR6 : 1;
12059         unsigned long CLR5 : 1;
12060         unsigned long CLR4 : 1;
12061         unsigned long CLR3 : 1;
12062         unsigned long CLR2 : 1;
12063         unsigned long CLR1 : 1;
12064         unsigned long CLR0 : 1;
12065     #endif
12066     } BIT;
12067     } GCRIE0;
```

```

12068     char            wk17[68];
12069     union {
12070         unsigned long LONG;
12071         struct {
12072
12073 #ifdef __RX_LITTLE_ENDIAN__
12074         unsigned long IS0 : 1;
12075         unsigned long IS1 : 1;
12076         unsigned long IS2 : 1;
12077         unsigned long IS3 : 1;
12078         unsigned long IS4 : 1;
12079         unsigned long IS5 : 1;
12080         unsigned long IS6 : 1;
12081         unsigned long IS7 : 1;
12082         unsigned long IS8 : 1;
12083         unsigned long IS9 : 1;
12084         unsigned long IS10 : 1;
12085         unsigned long IS11 : 1;
12086         unsigned long IS12 : 1;
12087         unsigned long IS13 : 1;
12088         unsigned long IS14 : 1;
12089         unsigned long IS15 : 1;
12090         unsigned long IS16 : 1;
12091         unsigned long IS17 : 1;
12092         unsigned long IS18 : 1;
12093         unsigned long IS19 : 1;
12094         unsigned long IS20 : 1;
12095         unsigned long IS21 : 1;
12096         unsigned long IS22 : 1;
12097         unsigned long IS23 : 1;
12098         unsigned long IS24 : 1;
12099         unsigned long IS25 : 1;
12100         unsigned long IS26 : 1;
12101         unsigned long IS27 : 1;
12102         unsigned long IS28 : 1;
12103         unsigned long IS29 : 1;
12104         unsigned long IS30 : 1;
12105         unsigned long IS31 : 1;
12106 #else
12107         unsigned long IS31 : 1;
12108         unsigned long IS30 : 1;
12109         unsigned long IS29 : 1;
12110         unsigned long IS28 : 1;
12111         unsigned long IS27 : 1;
12112         unsigned long IS26 : 1;
12113         unsigned long IS25 : 1;
12114         unsigned long IS24 : 1;
12115         unsigned long IS23 : 1;
12116         unsigned long IS22 : 1;
12117         unsigned long IS21 : 1;
12118         unsigned long IS20 : 1;
12119         unsigned long IS19 : 1;
12120         unsigned long IS18 : 1;
12121         unsigned long IS17 : 1;
12122         unsigned long IS16 : 1;
12123         unsigned long IS15 : 1;
12124         unsigned long IS14 : 1;
12125         unsigned long IS13 : 1;
12126         unsigned long IS12 : 1;
12127         unsigned long IS11 : 1;
12128         unsigned long IS10 : 1;
12129         unsigned long IS9 : 1;
12130         unsigned long IS8 : 1;
12131         unsigned long IS7 : 1;
12132         unsigned long IS6 : 1;
12133         unsigned long IS5 : 1;
12134         unsigned long IS4 : 1;
12135         unsigned long IS3 : 1;
12136         unsigned long IS2 : 1;
12137         unsigned long IS1 : 1;
12138         unsigned long IS0 : 1;
12139 #endif
12140     } BIT;
12141     } GRPBE0;
12142     char            wk18[44];
12143     union {
12144         unsigned long LONG;
12145         struct {
12146
12147 #ifdef __RX_LITTLE_ENDIAN__
12148         unsigned long IS0 : 1;
12149         unsigned long IS1 : 1;
12150         unsigned long IS2 : 1;
12151         unsigned long IS3 : 1;
12152         unsigned long IS4 : 1;
12153         unsigned long IS5 : 1;
12154         unsigned long IS6 : 1;

```

```
12155     unsigned long IS7 : 1;
12156     unsigned long IS8 : 1;
12157     unsigned long IS9 : 1;
12158     unsigned long IS10 : 1;
12159     unsigned long IS11 : 1;
12160     unsigned long IS12 : 1;
12161     unsigned long IS13 : 1;
12162     unsigned long IS14 : 1;
12163     unsigned long IS15 : 1;
12164     unsigned long IS16 : 1;
12165     unsigned long IS17 : 1;
12166     unsigned long IS18 : 1;
12167     unsigned long IS19 : 1;
12168     unsigned long IS20 : 1;
12169     unsigned long IS21 : 1;
12170     unsigned long IS22 : 1;
12171     unsigned long IS23 : 1;
12172     unsigned long IS24 : 1;
12173     unsigned long IS25 : 1;
12174     unsigned long IS26 : 1;
12175     unsigned long IS27 : 1;
12176     unsigned long IS28 : 1;
12177     unsigned long IS29 : 1;
12178     unsigned long IS30 : 1;
12179     unsigned long IS31 : 1;
12180 #else
12181     unsigned long IS31 : 1;
12182     unsigned long IS30 : 1;
12183     unsigned long IS29 : 1;
12184     unsigned long IS28 : 1;
12185     unsigned long IS27 : 1;
12186     unsigned long IS26 : 1;
12187     unsigned long IS25 : 1;
12188     unsigned long IS24 : 1;
12189     unsigned long IS23 : 1;
12190     unsigned long IS22 : 1;
12191     unsigned long IS21 : 1;
12192     unsigned long IS20 : 1;
12193     unsigned long IS19 : 1;
12194     unsigned long IS18 : 1;
12195     unsigned long IS17 : 1;
12196     unsigned long IS16 : 1;
12197     unsigned long IS15 : 1;
12198     unsigned long IS14 : 1;
12199     unsigned long IS13 : 1;
12200     unsigned long IS12 : 1;
12201     unsigned long IS11 : 1;
12202     unsigned long IS10 : 1;
12203     unsigned long IS9 : 1;
12204     unsigned long IS8 : 1;
12205     unsigned long IS7 : 1;
12206     unsigned long IS6 : 1;
12207     unsigned long IS5 : 1;
12208     unsigned long IS4 : 1;
12209     unsigned long IS3 : 1;
12210     unsigned long IS2 : 1;
12211     unsigned long IS1 : 1;
12212     unsigned long IS0 : 1;
12213 #endif
12214     } BIT;
12215     } GRPBL0;
12216     union {
12217         unsigned long LONG;
12218         struct {
12219
12220 #ifdef __RX_LITTLE_ENDIAN__
12221         unsigned long IS0 : 1;
12222         unsigned long IS1 : 1;
12223         unsigned long IS2 : 1;
12224         unsigned long IS3 : 1;
12225         unsigned long IS4 : 1;
12226         unsigned long IS5 : 1;
12227         unsigned long IS6 : 1;
12228         unsigned long IS7 : 1;
12229         unsigned long IS8 : 1;
12230         unsigned long IS9 : 1;
12231         unsigned long IS10 : 1;
12232         unsigned long IS11 : 1;
12233         unsigned long IS12 : 1;
12234         unsigned long IS13 : 1;
12235         unsigned long IS14 : 1;
12236         unsigned long IS15 : 1;
12237         unsigned long IS16 : 1;
12238         unsigned long IS17 : 1;
12239         unsigned long IS18 : 1;
12240         unsigned long IS19 : 1;
12241         unsigned long IS20 : 1;
```

```
12242     unsigned long IS21 : 1;
12243     unsigned long IS22 : 1;
12244     unsigned long IS23 : 1;
12245     unsigned long IS24 : 1;
12246     unsigned long IS25 : 1;
12247     unsigned long IS26 : 1;
12248     unsigned long IS27 : 1;
12249     unsigned long IS28 : 1;
12250     unsigned long IS29 : 1;
12251     unsigned long IS30 : 1;
12252     unsigned long IS31 : 1;
12253 #else
12254     unsigned long IS31 : 1;
12255     unsigned long IS30 : 1;
12256     unsigned long IS29 : 1;
12257     unsigned long IS28 : 1;
12258     unsigned long IS27 : 1;
12259     unsigned long IS26 : 1;
12260     unsigned long IS25 : 1;
12261     unsigned long IS24 : 1;
12262     unsigned long IS23 : 1;
12263     unsigned long IS22 : 1;
12264     unsigned long IS21 : 1;
12265     unsigned long IS20 : 1;
12266     unsigned long IS19 : 1;
12267     unsigned long IS18 : 1;
12268     unsigned long IS17 : 1;
12269     unsigned long IS16 : 1;
12270     unsigned long IS15 : 1;
12271     unsigned long IS14 : 1;
12272     unsigned long IS13 : 1;
12273     unsigned long IS12 : 1;
12274     unsigned long IS11 : 1;
12275     unsigned long IS10 : 1;
12276     unsigned long IS9 : 1;
12277     unsigned long IS8 : 1;
12278     unsigned long IS7 : 1;
12279     unsigned long IS6 : 1;
12280     unsigned long IS5 : 1;
12281     unsigned long IS4 : 1;
12282     unsigned long IS3 : 1;
12283     unsigned long IS2 : 1;
12284     unsigned long IS1 : 1;
12285     unsigned long IS0 : 1;
12286 #endif
12287 } BIT;
12288 } GRPBL1;
12289 union {
12290     unsigned long LONG;
12291     struct {
12292
12293 #ifdef __RX_LITTLE_ENDIAN__
12294     unsigned long IS0 : 1;
12295     unsigned long IS1 : 1;
12296     unsigned long IS2 : 1;
12297     unsigned long IS3 : 1;
12298     unsigned long IS4 : 1;
12299     unsigned long IS5 : 1;
12300     unsigned long IS6 : 1;
12301     unsigned long IS7 : 1;
12302     unsigned long IS8 : 1;
12303     unsigned long IS9 : 1;
12304     unsigned long IS10 : 1;
12305     unsigned long IS11 : 1;
12306     unsigned long IS12 : 1;
12307     unsigned long IS13 : 1;
12308     unsigned long IS14 : 1;
12309     unsigned long IS15 : 1;
12310     unsigned long IS16 : 1;
12311     unsigned long IS17 : 1;
12312     unsigned long IS18 : 1;
12313     unsigned long IS19 : 1;
12314     unsigned long IS20 : 1;
12315     unsigned long IS21 : 1;
12316     unsigned long IS22 : 1;
12317     unsigned long IS23 : 1;
12318     unsigned long IS24 : 1;
12319     unsigned long IS25 : 1;
12320     unsigned long IS26 : 1;
12321     unsigned long IS27 : 1;
12322     unsigned long IS28 : 1;
12323     unsigned long IS29 : 1;
12324     unsigned long IS30 : 1;
12325     unsigned long IS31 : 1;
12326 #else
12327     unsigned long IS31 : 1;
12328     unsigned long IS30 : 1;
```

```
12329     unsigned long IS29 : 1;
12330     unsigned long IS28 : 1;
12331     unsigned long IS27 : 1;
12332     unsigned long IS26 : 1;
12333     unsigned long IS25 : 1;
12334     unsigned long IS24 : 1;
12335     unsigned long IS23 : 1;
12336     unsigned long IS22 : 1;
12337     unsigned long IS21 : 1;
12338     unsigned long IS20 : 1;
12339     unsigned long IS19 : 1;
12340     unsigned long IS18 : 1;
12341     unsigned long IS17 : 1;
12342     unsigned long IS16 : 1;
12343     unsigned long IS15 : 1;
12344     unsigned long IS14 : 1;
12345     unsigned long IS13 : 1;
12346     unsigned long IS12 : 1;
12347     unsigned long IS11 : 1;
12348     unsigned long IS10 : 1;
12349     unsigned long IS9 : 1;
12350     unsigned long IS8 : 1;
12351     unsigned long IS7 : 1;
12352     unsigned long IS6 : 1;
12353     unsigned long IS5 : 1;
12354     unsigned long IS4 : 1;
12355     unsigned long IS3 : 1;
12356     unsigned long IS2 : 1;
12357     unsigned long IS1 : 1;
12358     unsigned long IS0 : 1;
12359 #endif
12360     } BIT;
12361     } GRPBL2;
12362     char          wk19[4];
12363     union {
12364         unsigned long LONG;
12365         struct {
12366
12367 #ifdef __RX_LITTLE_ENDIAN__
12368         unsigned long EN0 : 1;
12369         unsigned long EN1 : 1;
12370         unsigned long EN2 : 1;
12371         unsigned long EN3 : 1;
12372         unsigned long EN4 : 1;
12373         unsigned long EN5 : 1;
12374         unsigned long EN6 : 1;
12375         unsigned long EN7 : 1;
12376         unsigned long EN8 : 1;
12377         unsigned long EN9 : 1;
12378         unsigned long EN10 : 1;
12379         unsigned long EN11 : 1;
12380         unsigned long EN12 : 1;
12381         unsigned long EN13 : 1;
12382         unsigned long EN14 : 1;
12383         unsigned long EN15 : 1;
12384         unsigned long EN16 : 1;
12385         unsigned long EN17 : 1;
12386         unsigned long EN18 : 1;
12387         unsigned long EN19 : 1;
12388         unsigned long EN20 : 1;
12389         unsigned long EN21 : 1;
12390         unsigned long EN22 : 1;
12391         unsigned long EN23 : 1;
12392         unsigned long EN24 : 1;
12393         unsigned long EN25 : 1;
12394         unsigned long EN26 : 1;
12395         unsigned long EN27 : 1;
12396         unsigned long EN28 : 1;
12397         unsigned long EN29 : 1;
12398         unsigned long EN30 : 1;
12399         unsigned long EN31 : 1;
12400 #else
12401         unsigned long EN31 : 1;
12402         unsigned long EN30 : 1;
12403         unsigned long EN29 : 1;
12404         unsigned long EN28 : 1;
12405         unsigned long EN27 : 1;
12406         unsigned long EN26 : 1;
12407         unsigned long EN25 : 1;
12408         unsigned long EN24 : 1;
12409         unsigned long EN23 : 1;
12410         unsigned long EN22 : 1;
12411         unsigned long EN21 : 1;
12412         unsigned long EN20 : 1;
12413         unsigned long EN19 : 1;
12414         unsigned long EN18 : 1;
12415         unsigned long EN17 : 1;
```

```
12416         unsigned long EN16 : 1;
12417         unsigned long EN15 : 1;
12418         unsigned long EN14 : 1;
12419         unsigned long EN13 : 1;
12420         unsigned long EN12 : 1;
12421         unsigned long EN11 : 1;
12422         unsigned long EN10 : 1;
12423         unsigned long EN9 : 1;
12424         unsigned long EN8 : 1;
12425         unsigned long EN7 : 1;
12426         unsigned long EN6 : 1;
12427         unsigned long EN5 : 1;
12428         unsigned long EN4 : 1;
12429         unsigned long EN3 : 1;
12430         unsigned long EN2 : 1;
12431         unsigned long EN1 : 1;
12432         unsigned long EN0 : 1;
12433     #endif
12434     } BIT;
12435     } GENBE0;
12436     char      wk20[44];
12437     union {
12438         unsigned long LONG;
12439         struct {
12440
12441     #ifdef      RX_LITTLE_ENDIAN
12442         unsigned long EN0 : 1;
12443         unsigned long EN1 : 1;
12444         unsigned long EN2 : 1;
12445         unsigned long EN3 : 1;
12446         unsigned long EN4 : 1;
12447         unsigned long EN5 : 1;
12448         unsigned long EN6 : 1;
12449         unsigned long EN7 : 1;
12450         unsigned long EN8 : 1;
12451         unsigned long EN9 : 1;
12452         unsigned long EN10 : 1;
12453         unsigned long EN11 : 1;
12454         unsigned long EN12 : 1;
12455         unsigned long EN13 : 1;
12456         unsigned long EN14 : 1;
12457         unsigned long EN15 : 1;
12458         unsigned long EN16 : 1;
12459         unsigned long EN17 : 1;
12460         unsigned long EN18 : 1;
12461         unsigned long EN19 : 1;
12462         unsigned long EN20 : 1;
12463         unsigned long EN21 : 1;
12464         unsigned long EN22 : 1;
12465         unsigned long EN23 : 1;
12466         unsigned long EN24 : 1;
12467         unsigned long EN25 : 1;
12468         unsigned long EN26 : 1;
12469         unsigned long EN27 : 1;
12470         unsigned long EN28 : 1;
12471         unsigned long EN29 : 1;
12472         unsigned long EN30 : 1;
12473         unsigned long EN31 : 1;
12474     #else
12475         unsigned long EN31 : 1;
12476         unsigned long EN30 : 1;
12477         unsigned long EN29 : 1;
12478         unsigned long EN28 : 1;
12479         unsigned long EN27 : 1;
12480         unsigned long EN26 : 1;
12481         unsigned long EN25 : 1;
12482         unsigned long EN24 : 1;
12483         unsigned long EN23 : 1;
12484         unsigned long EN22 : 1;
12485         unsigned long EN21 : 1;
12486         unsigned long EN20 : 1;
12487         unsigned long EN19 : 1;
12488         unsigned long EN18 : 1;
12489         unsigned long EN17 : 1;
12490         unsigned long EN16 : 1;
12491         unsigned long EN15 : 1;
12492         unsigned long EN14 : 1;
12493         unsigned long EN13 : 1;
12494         unsigned long EN12 : 1;
12495         unsigned long EN11 : 1;
12496         unsigned long EN10 : 1;
12497         unsigned long EN9 : 1;
12498         unsigned long EN8 : 1;
12499         unsigned long EN7 : 1;
12500         unsigned long EN6 : 1;
12501         unsigned long EN5 : 1;
12502         unsigned long EN4 : 1;
```

```

12503         unsigned long EN3 : 1;
12504         unsigned long EN2 : 1;
12505         unsigned long EN1 : 1;
12506         unsigned long EN0 : 1;
12507     #endif
12508     } BIT;
12509     } GENBL0;
12510     union {
12511         unsigned long LONG;
12512         struct {
12513
12514     #ifdef __RX_LITTLE_ENDIAN__
12515         unsigned long EN0 : 1;
12516         unsigned long EN1 : 1;
12517         unsigned long EN2 : 1;
12518         unsigned long EN3 : 1;
12519         unsigned long EN4 : 1;
12520         unsigned long EN5 : 1;
12521         unsigned long EN6 : 1;
12522         unsigned long EN7 : 1;
12523         unsigned long EN8 : 1;
12524         unsigned long EN9 : 1;
12525         unsigned long EN10 : 1;
12526         unsigned long EN11 : 1;
12527         unsigned long EN12 : 1;
12528         unsigned long EN13 : 1;
12529         unsigned long EN14 : 1;
12530         unsigned long EN15 : 1;
12531         unsigned long EN16 : 1;
12532         unsigned long EN17 : 1;
12533         unsigned long EN18 : 1;
12534         unsigned long EN19 : 1;
12535         unsigned long EN20 : 1;
12536         unsigned long EN21 : 1;
12537         unsigned long EN22 : 1;
12538         unsigned long EN23 : 1;
12539         unsigned long EN24 : 1;
12540         unsigned long EN25 : 1;
12541         unsigned long EN26 : 1;
12542         unsigned long EN27 : 1;
12543         unsigned long EN28 : 1;
12544         unsigned long EN29 : 1;
12545         unsigned long EN30 : 1;
12546         unsigned long EN31 : 1;
12547     #else
12548         unsigned long EN31 : 1;
12549         unsigned long EN30 : 1;
12550         unsigned long EN29 : 1;
12551         unsigned long EN28 : 1;
12552         unsigned long EN27 : 1;
12553         unsigned long EN26 : 1;
12554         unsigned long EN25 : 1;
12555         unsigned long EN24 : 1;
12556         unsigned long EN23 : 1;
12557         unsigned long EN22 : 1;
12558         unsigned long EN21 : 1;
12559         unsigned long EN20 : 1;
12560         unsigned long EN19 : 1;
12561         unsigned long EN18 : 1;
12562         unsigned long EN17 : 1;
12563         unsigned long EN16 : 1;
12564         unsigned long EN15 : 1;
12565         unsigned long EN14 : 1;
12566         unsigned long EN13 : 1;
12567         unsigned long EN12 : 1;
12568         unsigned long EN11 : 1;
12569         unsigned long EN10 : 1;
12570         unsigned long EN9 : 1;
12571         unsigned long EN8 : 1;
12572         unsigned long EN7 : 1;
12573         unsigned long EN6 : 1;
12574         unsigned long EN5 : 1;
12575         unsigned long EN4 : 1;
12576         unsigned long EN3 : 1;
12577         unsigned long EN2 : 1;
12578         unsigned long EN1 : 1;
12579         unsigned long EN0 : 1;
12580     #endif
12581     } BIT;
12582     } GENBL1;
12583     union {
12584         unsigned long LONG;
12585         struct {
12586
12587     #ifdef __RX_LITTLE_ENDIAN__
12588         unsigned long EN0 : 1;
12589         unsigned long EN1 : 1;

```

```

12590     unsigned long EN2 : 1;
12591     unsigned long EN3 : 1;
12592     unsigned long EN4 : 1;
12593     unsigned long EN5 : 1;
12594     unsigned long EN6 : 1;
12595     unsigned long EN7 : 1;
12596     unsigned long EN8 : 1;
12597     unsigned long EN9 : 1;
12598     unsigned long EN10 : 1;
12599     unsigned long EN11 : 1;
12600     unsigned long EN12 : 1;
12601     unsigned long EN13 : 1;
12602     unsigned long EN14 : 1;
12603     unsigned long EN15 : 1;
12604     unsigned long EN16 : 1;
12605     unsigned long EN17 : 1;
12606     unsigned long EN18 : 1;
12607     unsigned long EN19 : 1;
12608     unsigned long EN20 : 1;
12609     unsigned long EN21 : 1;
12610     unsigned long EN22 : 1;
12611     unsigned long EN23 : 1;
12612     unsigned long EN24 : 1;
12613     unsigned long EN25 : 1;
12614     unsigned long EN26 : 1;
12615     unsigned long EN27 : 1;
12616     unsigned long EN28 : 1;
12617     unsigned long EN29 : 1;
12618     unsigned long EN30 : 1;
12619     unsigned long EN31 : 1;
12620 #else
12621     unsigned long EN31 : 1;
12622     unsigned long EN30 : 1;
12623     unsigned long EN29 : 1;
12624     unsigned long EN28 : 1;
12625     unsigned long EN27 : 1;
12626     unsigned long EN26 : 1;
12627     unsigned long EN25 : 1;
12628     unsigned long EN24 : 1;
12629     unsigned long EN23 : 1;
12630     unsigned long EN22 : 1;
12631     unsigned long EN21 : 1;
12632     unsigned long EN20 : 1;
12633     unsigned long EN19 : 1;
12634     unsigned long EN18 : 1;
12635     unsigned long EN17 : 1;
12636     unsigned long EN16 : 1;
12637     unsigned long EN15 : 1;
12638     unsigned long EN14 : 1;
12639     unsigned long EN13 : 1;
12640     unsigned long EN12 : 1;
12641     unsigned long EN11 : 1;
12642     unsigned long EN10 : 1;
12643     unsigned long EN9 : 1;
12644     unsigned long EN8 : 1;
12645     unsigned long EN7 : 1;
12646     unsigned long EN6 : 1;
12647     unsigned long EN5 : 1;
12648     unsigned long EN4 : 1;
12649     unsigned long EN3 : 1;
12650     unsigned long EN2 : 1;
12651     unsigned long EN1 : 1;
12652     unsigned long EN0 : 1;
12653 #endif
12654     } BIT;
12655     } GENBL2;
12656     char          wk21[4];
12657     union {
12658         unsigned long LONG;
12659         struct {
12660
12661 #ifdef __RX_LITTLE_ENDIAN__
12662         unsigned long CLR0 : 1;
12663         unsigned long CLR1 : 1;
12664         unsigned long CLR2 : 1;
12665         unsigned long CLR3 : 1;
12666         unsigned long CLR4 : 1;
12667         unsigned long CLR5 : 1;
12668         unsigned long CLR6 : 1;
12669         unsigned long CLR7 : 1;
12670         unsigned long CLR8 : 1;
12671         unsigned long CLR9 : 1;
12672         unsigned long CLR10 : 1;
12673         unsigned long CLR11 : 1;
12674         unsigned long CLR12 : 1;
12675         unsigned long CLR13 : 1;
12676         unsigned long CLR14 : 1;

```

```

12677     unsigned long CLR15 : 1;
12678     unsigned long CLR16 : 1;
12679     unsigned long CLR17 : 1;
12680     unsigned long CLR18 : 1;
12681     unsigned long CLR19 : 1;
12682     unsigned long CLR20 : 1;
12683     unsigned long CLR21 : 1;
12684     unsigned long CLR22 : 1;
12685     unsigned long CLR23 : 1;
12686     unsigned long CLR24 : 1;
12687     unsigned long CLR25 : 1;
12688     unsigned long CLR26 : 1;
12689     unsigned long CLR27 : 1;
12690     unsigned long CLR28 : 1;
12691     unsigned long CLR29 : 1;
12692     unsigned long CLR30 : 1;
12693     unsigned long CLR31 : 1;
12694 #else
12695     unsigned long CLR31 : 1;
12696     unsigned long CLR30 : 1;
12697     unsigned long CLR29 : 1;
12698     unsigned long CLR28 : 1;
12699     unsigned long CLR27 : 1;
12700     unsigned long CLR26 : 1;
12701     unsigned long CLR25 : 1;
12702     unsigned long CLR24 : 1;
12703     unsigned long CLR23 : 1;
12704     unsigned long CLR22 : 1;
12705     unsigned long CLR21 : 1;
12706     unsigned long CLR20 : 1;
12707     unsigned long CLR19 : 1;
12708     unsigned long CLR18 : 1;
12709     unsigned long CLR17 : 1;
12710     unsigned long CLR16 : 1;
12711     unsigned long CLR15 : 1;
12712     unsigned long CLR14 : 1;
12713     unsigned long CLR13 : 1;
12714     unsigned long CLR12 : 1;
12715     unsigned long CLR11 : 1;
12716     unsigned long CLR10 : 1;
12717     unsigned long CLR9 : 1;
12718     unsigned long CLR8 : 1;
12719     unsigned long CLR7 : 1;
12720     unsigned long CLR6 : 1;
12721     unsigned long CLR5 : 1;
12722     unsigned long CLR4 : 1;
12723     unsigned long CLR3 : 1;
12724     unsigned long CLR2 : 1;
12725     unsigned long CLR1 : 1;
12726     unsigned long CLR0 : 1;
12727 #endif
12728     } BIT;
12729     } GCRBE0;
12730     char      wk22[124];
12731     union {
12732         unsigned char BYTE;
12733         struct {
12734
12735 #ifdef __RX_LITTLE_ENDIAN__
12736         unsigned char PIR0 : 1;
12737         unsigned char PIR1 : 1;
12738         unsigned char PIR2 : 1;
12739         unsigned char PIR3 : 1;
12740         unsigned char PIR4 : 1;
12741         unsigned char PIR5 : 1;
12742         unsigned char PIR6 : 1;
12743         unsigned char PIR7 : 1;
12744 #else
12745         unsigned char PIR7 : 1;
12746         unsigned char PIR6 : 1;
12747         unsigned char PIR5 : 1;
12748         unsigned char PIR4 : 1;
12749         unsigned char PIR3 : 1;
12750         unsigned char PIR2 : 1;
12751         unsigned char PIR1 : 1;
12752         unsigned char PIR0 : 1;
12753 #endif
12754         } BIT;
12755         } PIBR0;
12756     union {
12757         unsigned char BYTE;
12758         struct {
12759
12760 #ifdef __RX_LITTLE_ENDIAN__
12761         unsigned char PIR0 : 1;
12762         unsigned char PIR1 : 1;
12763         unsigned char PIR2 : 1;

```

```
12764         unsigned char PIR3 : 1;
12765         unsigned char PIR4 : 1;
12766         unsigned char PIR5 : 1;
12767         unsigned char PIR6 : 1;
12768         unsigned char PIR7 : 1;
12769 #else
12770         unsigned char PIR7 : 1;
12771         unsigned char PIR6 : 1;
12772         unsigned char PIR5 : 1;
12773         unsigned char PIR4 : 1;
12774         unsigned char PIR3 : 1;
12775         unsigned char PIR2 : 1;
12776         unsigned char PIR1 : 1;
12777         unsigned char PIR0 : 1;
12778 #endif
12779     } BIT;
12780     } PIR1;
12781     union {
12782         unsigned char BYTE;
12783         struct {
12784
12785 #ifdef __RX_LITTLE_ENDIAN__
12786         unsigned char PIR0 : 1;
12787         unsigned char PIR1 : 1;
12788         unsigned char PIR2 : 1;
12789         unsigned char PIR3 : 1;
12790         unsigned char PIR4 : 1;
12791         unsigned char PIR5 : 1;
12792         unsigned char PIR6 : 1;
12793         unsigned char PIR7 : 1;
12794 #else
12795         unsigned char PIR7 : 1;
12796         unsigned char PIR6 : 1;
12797         unsigned char PIR5 : 1;
12798         unsigned char PIR4 : 1;
12799         unsigned char PIR3 : 1;
12800         unsigned char PIR2 : 1;
12801         unsigned char PIR1 : 1;
12802         unsigned char PIR0 : 1;
12803 #endif
12804     } BIT;
12805     } PIR2;
12806     union {
12807         unsigned char BYTE;
12808         struct {
12809
12810 #ifdef __RX_LITTLE_ENDIAN__
12811         unsigned char PIR0 : 1;
12812         unsigned char PIR1 : 1;
12813         unsigned char PIR2 : 1;
12814         unsigned char PIR3 : 1;
12815         unsigned char PIR4 : 1;
12816         unsigned char PIR5 : 1;
12817         unsigned char PIR6 : 1;
12818         unsigned char PIR7 : 1;
12819 #else
12820         unsigned char PIR7 : 1;
12821         unsigned char PIR6 : 1;
12822         unsigned char PIR5 : 1;
12823         unsigned char PIR4 : 1;
12824         unsigned char PIR3 : 1;
12825         unsigned char PIR2 : 1;
12826         unsigned char PIR1 : 1;
12827         unsigned char PIR0 : 1;
12828 #endif
12829     } BIT;
12830     } PIR3;
12831     union {
12832         unsigned char BYTE;
12833         struct {
12834
12835 #ifdef __RX_LITTLE_ENDIAN__
12836         unsigned char PIR0 : 1;
12837         unsigned char PIR1 : 1;
12838         unsigned char PIR2 : 1;
12839         unsigned char PIR3 : 1;
12840         unsigned char PIR4 : 1;
12841         unsigned char PIR5 : 1;
12842         unsigned char PIR6 : 1;
12843         unsigned char PIR7 : 1;
12844 #else
12845         unsigned char PIR7 : 1;
12846         unsigned char PIR6 : 1;
12847         unsigned char PIR5 : 1;
12848         unsigned char PIR4 : 1;
12849         unsigned char PIR3 : 1;
12850         unsigned char PIR2 : 1;
```

```
12851         unsigned char PIR1 : 1;
12852         unsigned char PIR0 : 1;
12853 #endif
12854     } BIT;
12855     } PIR4;
12856     union {
12857         unsigned char BYTE;
12858         struct {
12859
12860 #ifdef __RX_LITTLE_ENDIAN__
12861         unsigned char PIR0 : 1;
12862         unsigned char PIR1 : 1;
12863         unsigned char PIR2 : 1;
12864         unsigned char PIR3 : 1;
12865         unsigned char PIR4 : 1;
12866         unsigned char PIR5 : 1;
12867         unsigned char PIR6 : 1;
12868         unsigned char PIR7 : 1;
12869 #else
12870         unsigned char PIR7 : 1;
12871         unsigned char PIR6 : 1;
12872         unsigned char PIR5 : 1;
12873         unsigned char PIR4 : 1;
12874         unsigned char PIR3 : 1;
12875         unsigned char PIR2 : 1;
12876         unsigned char PIR1 : 1;
12877         unsigned char PIR0 : 1;
12878 #endif
12879     } BIT;
12880     } PIR5;
12881     union {
12882         unsigned char BYTE;
12883         struct {
12884
12885 #ifdef __RX_LITTLE_ENDIAN__
12886         unsigned char PIR0 : 1;
12887         unsigned char PIR1 : 1;
12888         unsigned char PIR2 : 1;
12889         unsigned char PIR3 : 1;
12890         unsigned char PIR4 : 1;
12891         unsigned char PIR5 : 1;
12892         unsigned char PIR6 : 1;
12893         unsigned char PIR7 : 1;
12894 #else
12895         unsigned char PIR7 : 1;
12896         unsigned char PIR6 : 1;
12897         unsigned char PIR5 : 1;
12898         unsigned char PIR4 : 1;
12899         unsigned char PIR3 : 1;
12900         unsigned char PIR2 : 1;
12901         unsigned char PIR1 : 1;
12902         unsigned char PIR0 : 1;
12903 #endif
12904     } BIT;
12905     } PIR6;
12906     union {
12907         unsigned char BYTE;
12908         struct {
12909
12910 #ifdef __RX_LITTLE_ENDIAN__
12911         unsigned char PIR0 : 1;
12912         unsigned char PIR1 : 1;
12913         unsigned char PIR2 : 1;
12914         unsigned char PIR3 : 1;
12915         unsigned char PIR4 : 1;
12916         unsigned char PIR5 : 1;
12917         unsigned char PIR6 : 1;
12918         unsigned char PIR7 : 1;
12919 #else
12920         unsigned char PIR7 : 1;
12921         unsigned char PIR6 : 1;
12922         unsigned char PIR5 : 1;
12923         unsigned char PIR4 : 1;
12924         unsigned char PIR3 : 1;
12925         unsigned char PIR2 : 1;
12926         unsigned char PIR1 : 1;
12927         unsigned char PIR0 : 1;
12928 #endif
12929     } BIT;
12930     } PIR7;
12931     union {
12932         unsigned char BYTE;
12933         struct {
12934
12935 #ifdef __RX_LITTLE_ENDIAN__
12936         unsigned char PIR0 : 1;
12937         unsigned char PIR1 : 1;
```

```

12938         unsigned char PIR2 : 1;
12939         unsigned char PIR3 : 1;
12940         unsigned char PIR4 : 1;
12941         unsigned char PIR5 : 1;
12942         unsigned char PIR6 : 1;
12943         unsigned char PIR7 : 1;
12944 #else
12945         unsigned char PIR7 : 1;
12946         unsigned char PIR6 : 1;
12947         unsigned char PIR5 : 1;
12948         unsigned char PIR4 : 1;
12949         unsigned char PIR3 : 1;
12950         unsigned char PIR2 : 1;
12951         unsigned char PIR1 : 1;
12952         unsigned char PIR0 : 1;
12953 #endif
12954     } BIT;
12955     } PIBR8;
12956     union {
12957         unsigned char BYTE;
12958         struct {
12959
12960 #ifdef __RX_LITTLE_ENDIAN__
12961         unsigned char PIR0 : 1;
12962         unsigned char PIR1 : 1;
12963         unsigned char PIR2 : 1;
12964         unsigned char PIR3 : 1;
12965         unsigned char PIR4 : 1;
12966         unsigned char PIR5 : 1;
12967         unsigned char PIR6 : 1;
12968         unsigned char PIR7 : 1;
12969 #else
12970         unsigned char PIR7 : 1;
12971         unsigned char PIR6 : 1;
12972         unsigned char PIR5 : 1;
12973         unsigned char PIR4 : 1;
12974         unsigned char PIR3 : 1;
12975         unsigned char PIR2 : 1;
12976         unsigned char PIR1 : 1;
12977         unsigned char PIR0 : 1;
12978 #endif
12979     } BIT;
12980     } PIBR9;
12981     union {
12982         unsigned char BYTE;
12983         struct {
12984
12985 #ifdef __RX_LITTLE_ENDIAN__
12986         unsigned char PIR0 : 1;
12987         unsigned char PIR1 : 1;
12988         unsigned char PIR2 : 1;
12989         unsigned char PIR3 : 1;
12990         unsigned char PIR4 : 1;
12991         unsigned char PIR5 : 1;
12992         unsigned char PIR6 : 1;
12993         unsigned char PIR7 : 1;
12994 #else
12995         unsigned char PIR7 : 1;
12996         unsigned char PIR6 : 1;
12997         unsigned char PIR5 : 1;
12998         unsigned char PIR4 : 1;
12999         unsigned char PIR3 : 1;
13000         unsigned char PIR2 : 1;
13001         unsigned char PIR1 : 1;
13002         unsigned char PIR0 : 1;
13003 #endif
13004     } BIT;
13005     } PIBRA;
13006     union {
13007         unsigned char BYTE;
13008         struct {
13009
13010 #ifdef __RX_LITTLE_ENDIAN__
13011         unsigned char PIR0 : 1;
13012         unsigned char PIR1 : 1;
13013         unsigned char PIR2 : 1;
13014         unsigned char PIR3 : 1;
13015         unsigned char PIR4 : 1;
13016         unsigned char PIR5 : 1;
13017         unsigned char PIR6 : 1;
13018         unsigned char PIR7 : 1;
13019 #else
13020         unsigned char PIR7 : 1;
13021         unsigned char PIR6 : 1;
13022         unsigned char PIR5 : 1;
13023         unsigned char PIR4 : 1;
13024         unsigned char PIR3 : 1;

```

```

13025         unsigned char PIR2 : 1;
13026         unsigned char PIR1 : 1;
13027         unsigned char PIR0 : 1;
13028 #endif
13029     } BIT;
13030     } PIBRB;
13031     char          wk23[116];
13032     union {
13033         unsigned char BYTE;
13034         struct {
13035
13036 #ifdef __RX_LITTLE_ENDIAN__
13037         unsigned char SLI : 8;
13038 #else
13039         unsigned char SLI : 8;
13040 #endif
13041         } BIT;
13042         } SLIBXR128;
13043         union {
13044             unsigned char BYTE;
13045             struct {
13046
13047 #ifdef __RX_LITTLE_ENDIAN__
13048             unsigned char SLI : 8;
13049 #else
13050             unsigned char SLI : 8;
13051 #endif
13052             } BIT;
13053             } SLIBXR129;
13054             union {
13055                 unsigned char BYTE;
13056                 struct {
13057
13058 #ifdef __RX_LITTLE_ENDIAN__
13059                 unsigned char SLI : 8;
13060 #else
13061                 unsigned char SLI : 8;
13062 #endif
13063                 } BIT;
13064                 } SLIBXR130;
13065                 union {
13066                     unsigned char BYTE;
13067                     struct {
13068
13069 #ifdef __RX_LITTLE_ENDIAN__
13070                     unsigned char SLI : 8;
13071 #else
13072                     unsigned char SLI : 8;
13073 #endif
13074                     } BIT;
13075                     } SLIBXR131;
13076                     union {
13077                         unsigned char BYTE;
13078                         struct {
13079
13080 #ifdef __RX_LITTLE_ENDIAN__
13081                         unsigned char SLI : 8;
13082 #else
13083                         unsigned char SLI : 8;
13084 #endif
13085                         } BIT;
13086                         } SLIBXR132;
13087                         union {
13088                             unsigned char BYTE;
13089                             struct {
13090
13091 #ifdef __RX_LITTLE_ENDIAN__
13092                             unsigned char SLI : 8;
13093 #else
13094                             unsigned char SLI : 8;
13095 #endif
13096                             } BIT;
13097                             } SLIBXR133;
13098                             union {
13099                                 unsigned char BYTE;
13100                                 struct {
13101
13102 #ifdef __RX_LITTLE_ENDIAN__
13103                                 unsigned char SLI : 8;
13104 #else
13105                                 unsigned char SLI : 8;
13106 #endif
13107                                 } BIT;
13108                                 } SLIBXR134;
13109                                 union {
13110                                     unsigned char BYTE;
13111                                     struct {

```

```

13112
13113 #ifdef __RX_LITTLE_ENDIAN__
13114     unsigned char SLI : 8;
13115 #else
13116     unsigned char SLI : 8;
13117 #endif
13118 } BIT;
13119 } SLIBXR135;
13120 union {
13121     unsigned char BYTE;
13122     struct {
13123
13124 #ifdef __RX_LITTLE_ENDIAN__
13125     unsigned char SLI : 8;
13126 #else
13127     unsigned char SLI : 8;
13128 #endif
13129     } BIT;
13130     } SLIBXR136;
13131 union {
13132     unsigned char BYTE;
13133     struct {
13134
13135 #ifdef __RX_LITTLE_ENDIAN__
13136     unsigned char SLI : 8;
13137 #else
13138     unsigned char SLI : 8;
13139 #endif
13140     } BIT;
13141     } SLIBXR137;
13142 union {
13143     unsigned char BYTE;
13144     struct {
13145
13146 #ifdef __RX_LITTLE_ENDIAN__
13147     unsigned char SLI : 8;
13148 #else
13149     unsigned char SLI : 8;
13150 #endif
13151     } BIT;
13152     } SLIBXR138;
13153 union {
13154     unsigned char BYTE;
13155     struct {
13156
13157 #ifdef __RX_LITTLE_ENDIAN__
13158     unsigned char SLI : 8;
13159 #else
13160     unsigned char SLI : 8;
13161 #endif
13162     } BIT;
13163     } SLIBXR139;
13164 union {
13165     unsigned char BYTE;
13166     struct {
13167
13168 #ifdef __RX_LITTLE_ENDIAN__
13169     unsigned char SLI : 8;
13170 #else
13171     unsigned char SLI : 8;
13172 #endif
13173     } BIT;
13174     } SLIBXR140;
13175 union {
13176     unsigned char BYTE;
13177     struct {
13178
13179 #ifdef __RX_LITTLE_ENDIAN__
13180     unsigned char SLI : 8;
13181 #else
13182     unsigned char SLI : 8;
13183 #endif
13184     } BIT;
13185     } SLIBXR141;
13186 union {
13187     unsigned char BYTE;
13188     struct {
13189
13190 #ifdef __RX_LITTLE_ENDIAN__
13191     unsigned char SLI : 8;
13192 #else
13193     unsigned char SLI : 8;
13194 #endif
13195     } BIT;
13196     } SLIBXR142;
13197 union {
13198     unsigned char BYTE;

```

```
13199     struct {
13200
13201 #ifdef __RX_LITTLE_ENDIAN__
13202     unsigned char SLI : 8;
13203 #else
13204     unsigned char SLI : 8;
13205 #endif
13206     } BIT;
13207     } SLIBXR143;
13208     union {
13209     unsigned char BYTE;
13210     struct {
13211
13212 #ifdef __RX_LITTLE_ENDIAN__
13213     unsigned char SLI : 8;
13214 #else
13215     unsigned char SLI : 8;
13216 #endif
13217     } BIT;
13218     } SLIBR144;
13219     union {
13220     unsigned char BYTE;
13221     struct {
13222
13223 #ifdef __RX_LITTLE_ENDIAN__
13224     unsigned char SLI : 8;
13225 #else
13226     unsigned char SLI : 8;
13227 #endif
13228     } BIT;
13229     } SLIBR145;
13230     union {
13231     unsigned char BYTE;
13232     struct {
13233
13234 #ifdef __RX_LITTLE_ENDIAN__
13235     unsigned char SLI : 8;
13236 #else
13237     unsigned char SLI : 8;
13238 #endif
13239     } BIT;
13240     } SLIBR146;
13241     union {
13242     unsigned char BYTE;
13243     struct {
13244
13245 #ifdef __RX_LITTLE_ENDIAN__
13246     unsigned char SLI : 8;
13247 #else
13248     unsigned char SLI : 8;
13249 #endif
13250     } BIT;
13251     } SLIBR147;
13252     union {
13253     unsigned char BYTE;
13254     struct {
13255
13256 #ifdef __RX_LITTLE_ENDIAN__
13257     unsigned char SLI : 8;
13258 #else
13259     unsigned char SLI : 8;
13260 #endif
13261     } BIT;
13262     } SLIBR148;
13263     union {
13264     unsigned char BYTE;
13265     struct {
13266
13267 #ifdef __RX_LITTLE_ENDIAN__
13268     unsigned char SLI : 8;
13269 #else
13270     unsigned char SLI : 8;
13271 #endif
13272     } BIT;
13273     } SLIBR149;
13274     union {
13275     unsigned char BYTE;
13276     struct {
13277
13278 #ifdef __RX_LITTLE_ENDIAN__
13279     unsigned char SLI : 8;
13280 #else
13281     unsigned char SLI : 8;
13282 #endif
13283     } BIT;
13284     } SLIBR150;
13285     union {
```

```
13286     unsigned char BYTE;
13287     struct {
13288
13289 #ifdef __RX_LITTLE_ENDIAN__
13290     unsigned char SLI : 8;
13291 #else
13292     unsigned char SLI : 8;
13293 #endif
13294     } BIT;
13295     } SLIBR151;
13296     union {
13297     unsigned char BYTE;
13298     struct {
13299
13300 #ifdef __RX_LITTLE_ENDIAN__
13301     unsigned char SLI : 8;
13302 #else
13303     unsigned char SLI : 8;
13304 #endif
13305     } BIT;
13306     } SLIBR152;
13307     union {
13308     unsigned char BYTE;
13309     struct {
13310
13311 #ifdef __RX_LITTLE_ENDIAN__
13312     unsigned char SLI : 8;
13313 #else
13314     unsigned char SLI : 8;
13315 #endif
13316     } BIT;
13317     } SLIBR153;
13318     union {
13319     unsigned char BYTE;
13320     struct {
13321
13322 #ifdef __RX_LITTLE_ENDIAN__
13323     unsigned char SLI : 8;
13324 #else
13325     unsigned char SLI : 8;
13326 #endif
13327     } BIT;
13328     } SLIBR154;
13329     union {
13330     unsigned char BYTE;
13331     struct {
13332
13333 #ifdef __RX_LITTLE_ENDIAN__
13334     unsigned char SLI : 8;
13335 #else
13336     unsigned char SLI : 8;
13337 #endif
13338     } BIT;
13339     } SLIBR155;
13340     union {
13341     unsigned char BYTE;
13342     struct {
13343
13344 #ifdef __RX_LITTLE_ENDIAN__
13345     unsigned char SLI : 8;
13346 #else
13347     unsigned char SLI : 8;
13348 #endif
13349     } BIT;
13350     } SLIBR156;
13351     union {
13352     unsigned char BYTE;
13353     struct {
13354
13355 #ifdef __RX_LITTLE_ENDIAN__
13356     unsigned char SLI : 8;
13357 #else
13358     unsigned char SLI : 8;
13359 #endif
13360     } BIT;
13361     } SLIBR157;
13362     union {
13363     unsigned char BYTE;
13364     struct {
13365
13366 #ifdef __RX_LITTLE_ENDIAN__
13367     unsigned char SLI : 8;
13368 #else
13369     unsigned char SLI : 8;
13370 #endif
13371     } BIT;
13372     } SLIBR158;
```

```
13373     union {
13374         unsigned char BYTE;
13375     struct {
13376
13377 #ifdef __RX_LITTLE_ENDIAN__
13378         unsigned char SLI : 8;
13379 #else
13380         unsigned char SLI : 8;
13381 #endif
13382     } BIT;
13383     } SLIBR159;
13384     union {
13385         unsigned char BYTE;
13386     struct {
13387
13388 #ifdef __RX_LITTLE_ENDIAN__
13389         unsigned char SLI : 8;
13390 #else
13391         unsigned char SLI : 8;
13392 #endif
13393     } BIT;
13394     } SLIBR160;
13395     union {
13396         unsigned char BYTE;
13397     struct {
13398
13399 #ifdef __RX_LITTLE_ENDIAN__
13400         unsigned char SLI : 8;
13401 #else
13402         unsigned char SLI : 8;
13403 #endif
13404     } BIT;
13405     } SLIBR161;
13406     union {
13407         unsigned char BYTE;
13408     struct {
13409
13410 #ifdef __RX_LITTLE_ENDIAN__
13411         unsigned char SLI : 8;
13412 #else
13413         unsigned char SLI : 8;
13414 #endif
13415     } BIT;
13416     } SLIBR162;
13417     union {
13418         unsigned char BYTE;
13419     struct {
13420
13421 #ifdef __RX_LITTLE_ENDIAN__
13422         unsigned char SLI : 8;
13423 #else
13424         unsigned char SLI : 8;
13425 #endif
13426     } BIT;
13427     } SLIBR163;
13428     union {
13429         unsigned char BYTE;
13430     struct {
13431
13432 #ifdef __RX_LITTLE_ENDIAN__
13433         unsigned char SLI : 8;
13434 #else
13435         unsigned char SLI : 8;
13436 #endif
13437     } BIT;
13438     } SLIBR164;
13439     union {
13440         unsigned char BYTE;
13441     struct {
13442
13443 #ifdef __RX_LITTLE_ENDIAN__
13444         unsigned char SLI : 8;
13445 #else
13446         unsigned char SLI : 8;
13447 #endif
13448     } BIT;
13449     } SLIBR165;
13450     union {
13451         unsigned char BYTE;
13452     struct {
13453
13454 #ifdef __RX_LITTLE_ENDIAN__
13455         unsigned char SLI : 8;
13456 #else
13457         unsigned char SLI : 8;
13458 #endif
13459     } BIT;
```

```
13460     } SLIBR166;
13461     union {
13462         unsigned char BYTE;
13463         struct {
13464
13465 #ifdef __RX_LITTLE_ENDIAN__
13466         unsigned char SLI : 8;
13467 #else
13468         unsigned char SLI : 8;
13469 #endif
13470     } BIT;
13471     } SLIBR167;
13472     union {
13473         unsigned char BYTE;
13474         struct {
13475
13476 #ifdef __RX_LITTLE_ENDIAN__
13477         unsigned char SLI : 8;
13478 #else
13479         unsigned char SLI : 8;
13480 #endif
13481     } BIT;
13482     } SLIBR168;
13483     union {
13484         unsigned char BYTE;
13485         struct {
13486
13487 #ifdef __RX_LITTLE_ENDIAN__
13488         unsigned char SLI : 8;
13489 #else
13490         unsigned char SLI : 8;
13491 #endif
13492     } BIT;
13493     } SLIBR169;
13494     union {
13495         unsigned char BYTE;
13496         struct {
13497
13498 #ifdef __RX_LITTLE_ENDIAN__
13499         unsigned char SLI : 8;
13500 #else
13501         unsigned char SLI : 8;
13502 #endif
13503     } BIT;
13504     } SLIBR170;
13505     union {
13506         unsigned char BYTE;
13507         struct {
13508
13509 #ifdef __RX_LITTLE_ENDIAN__
13510         unsigned char SLI : 8;
13511 #else
13512         unsigned char SLI : 8;
13513 #endif
13514     } BIT;
13515     } SLIBR171;
13516     union {
13517         unsigned char BYTE;
13518         struct {
13519
13520 #ifdef __RX_LITTLE_ENDIAN__
13521         unsigned char SLI : 8;
13522 #else
13523         unsigned char SLI : 8;
13524 #endif
13525     } BIT;
13526     } SLIBR172;
13527     union {
13528         unsigned char BYTE;
13529         struct {
13530
13531 #ifdef __RX_LITTLE_ENDIAN__
13532         unsigned char SLI : 8;
13533 #else
13534         unsigned char SLI : 8;
13535 #endif
13536     } BIT;
13537     } SLIBR173;
13538     union {
13539         unsigned char BYTE;
13540         struct {
13541
13542 #ifdef __RX_LITTLE_ENDIAN__
13543         unsigned char SLI : 8;
13544 #else
13545         unsigned char SLI : 8;
13546 #endif
```

```
13547     } BIT;
13548     } SLIBR174;
13549     union {
13550         unsigned char BYTE;
13551         struct {
13552
13553 #ifdef __RX_LITTLE_ENDIAN__
13554         unsigned char SLI : 8;
13555 #else
13556         unsigned char SLI : 8;
13557 #endif
13558     } BIT;
13559     } SLIBR175;
13560     union {
13561         unsigned char BYTE;
13562         struct {
13563
13564 #ifdef __RX_LITTLE_ENDIAN__
13565         unsigned char SLI : 8;
13566 #else
13567         unsigned char SLI : 8;
13568 #endif
13569     } BIT;
13570     } SLIBR176;
13571     union {
13572         unsigned char BYTE;
13573         struct {
13574
13575 #ifdef __RX_LITTLE_ENDIAN__
13576         unsigned char SLI : 8;
13577 #else
13578         unsigned char SLI : 8;
13579 #endif
13580     } BIT;
13581     } SLIBR177;
13582     union {
13583         unsigned char BYTE;
13584         struct {
13585
13586 #ifdef __RX_LITTLE_ENDIAN__
13587         unsigned char SLI : 8;
13588 #else
13589         unsigned char SLI : 8;
13590 #endif
13591     } BIT;
13592     } SLIBR178;
13593     union {
13594         unsigned char BYTE;
13595         struct {
13596
13597 #ifdef __RX_LITTLE_ENDIAN__
13598         unsigned char SLI : 8;
13599 #else
13600         unsigned char SLI : 8;
13601 #endif
13602     } BIT;
13603     } SLIBR179;
13604     union {
13605         unsigned char BYTE;
13606         struct {
13607
13608 #ifdef __RX_LITTLE_ENDIAN__
13609         unsigned char SLI : 8;
13610 #else
13611         unsigned char SLI : 8;
13612 #endif
13613     } BIT;
13614     } SLIBR180;
13615     union {
13616         unsigned char BYTE;
13617         struct {
13618
13619 #ifdef __RX_LITTLE_ENDIAN__
13620         unsigned char SLI : 8;
13621 #else
13622         unsigned char SLI : 8;
13623 #endif
13624     } BIT;
13625     } SLIBR181;
13626     union {
13627         unsigned char BYTE;
13628         struct {
13629
13630 #ifdef __RX_LITTLE_ENDIAN__
13631         unsigned char SLI : 8;
13632 #else
13633         unsigned char SLI : 8;
```

```
13634 #endif
13635     } BIT;
13636     } SLIBR182;
13637     union {
13638         unsigned char BYTE;
13639         struct {
13640
13641 #ifdef __RX_LITTLE_ENDIAN__
13642     unsigned char SLI : 8;
13643 #else
13644     unsigned char SLI : 8;
13645 #endif
13646     } BIT;
13647     } SLIBR183;
13648     union {
13649         unsigned char BYTE;
13650         struct {
13651
13652 #ifdef __RX_LITTLE_ENDIAN__
13653     unsigned char SLI : 8;
13654 #else
13655     unsigned char SLI : 8;
13656 #endif
13657     } BIT;
13658     } SLIBR184;
13659     union {
13660         unsigned char BYTE;
13661         struct {
13662
13663 #ifdef __RX_LITTLE_ENDIAN__
13664     unsigned char SLI : 8;
13665 #else
13666     unsigned char SLI : 8;
13667 #endif
13668     } BIT;
13669     } SLIBR185;
13670     union {
13671         unsigned char BYTE;
13672         struct {
13673
13674 #ifdef __RX_LITTLE_ENDIAN__
13675     unsigned char SLI : 8;
13676 #else
13677     unsigned char SLI : 8;
13678 #endif
13679     } BIT;
13680     } SLIBR186;
13681     union {
13682         unsigned char BYTE;
13683         struct {
13684
13685 #ifdef __RX_LITTLE_ENDIAN__
13686     unsigned char SLI : 8;
13687 #else
13688     unsigned char SLI : 8;
13689 #endif
13690     } BIT;
13691     } SLIBR187;
13692     union {
13693         unsigned char BYTE;
13694         struct {
13695
13696 #ifdef __RX_LITTLE_ENDIAN__
13697     unsigned char SLI : 8;
13698 #else
13699     unsigned char SLI : 8;
13700 #endif
13701     } BIT;
13702     } SLIBR188;
13703     union {
13704         unsigned char BYTE;
13705         struct {
13706
13707 #ifdef __RX_LITTLE_ENDIAN__
13708     unsigned char SLI : 8;
13709 #else
13710     unsigned char SLI : 8;
13711 #endif
13712     } BIT;
13713     } SLIBR189;
13714     union {
13715         unsigned char BYTE;
13716         struct {
13717
13718 #ifdef __RX_LITTLE_ENDIAN__
13719     unsigned char SLI : 8;
13720 #else
```

```
13721         unsigned char SLI : 8;
13722 #endif
13723     } BIT;
13724     } SLIBR190;
13725     union {
13726         unsigned char BYTE;
13727         struct {
13728
13729 #ifdef __RX_LITTLE_ENDIAN__
13730         unsigned char SLI : 8;
13731 #else
13732         unsigned char SLI : 8;
13733 #endif
13734     } BIT;
13735     } SLIBR191;
13736     union {
13737         unsigned char BYTE;
13738         struct {
13739
13740 #ifdef __RX_LITTLE_ENDIAN__
13741         unsigned char SLI : 8;
13742 #else
13743         unsigned char SLI : 8;
13744 #endif
13745     } BIT;
13746     } SLIBR192;
13747     union {
13748         unsigned char BYTE;
13749         struct {
13750
13751 #ifdef __RX_LITTLE_ENDIAN__
13752         unsigned char SLI : 8;
13753 #else
13754         unsigned char SLI : 8;
13755 #endif
13756     } BIT;
13757     } SLIBR193;
13758     union {
13759         unsigned char BYTE;
13760         struct {
13761
13762 #ifdef __RX_LITTLE_ENDIAN__
13763         unsigned char SLI : 8;
13764 #else
13765         unsigned char SLI : 8;
13766 #endif
13767     } BIT;
13768     } SLIBR194;
13769     union {
13770         unsigned char BYTE;
13771         struct {
13772
13773 #ifdef __RX_LITTLE_ENDIAN__
13774         unsigned char SLI : 8;
13775 #else
13776         unsigned char SLI : 8;
13777 #endif
13778     } BIT;
13779     } SLIBR195;
13780     union {
13781         unsigned char BYTE;
13782         struct {
13783
13784 #ifdef __RX_LITTLE_ENDIAN__
13785         unsigned char SLI : 8;
13786 #else
13787         unsigned char SLI : 8;
13788 #endif
13789     } BIT;
13790     } SLIBR196;
13791     union {
13792         unsigned char BYTE;
13793         struct {
13794
13795 #ifdef __RX_LITTLE_ENDIAN__
13796         unsigned char SLI : 8;
13797 #else
13798         unsigned char SLI : 8;
13799 #endif
13800     } BIT;
13801     } SLIBR197;
13802     union {
13803         unsigned char BYTE;
13804         struct {
13805
13806 #ifdef __RX_LITTLE_ENDIAN__
13807         unsigned char SLI : 8;
```

```
13808 #else
13809     unsigned char SLI : 8;
13810 #endif
13811     } BIT;
13812     } SLIBR198;
13813     union {
13814         unsigned char BYTE;
13815         struct {
13816
13817 #ifdef __RX_LITTLE_ENDIAN__
13818         unsigned char SLI : 8;
13819 #else
13820         unsigned char SLI : 8;
13821 #endif
13822         } BIT;
13823         } SLIBR199;
13824         union {
13825             unsigned char BYTE;
13826             struct {
13827
13828 #ifdef __RX_LITTLE_ENDIAN__
13829             unsigned char SLI : 8;
13830 #else
13831             unsigned char SLI : 8;
13832 #endif
13833             } BIT;
13834             } SLIBR200;
13835             union {
13836                 unsigned char BYTE;
13837                 struct {
13838
13839 #ifdef __RX_LITTLE_ENDIAN__
13840                 unsigned char SLI : 8;
13841 #else
13842                 unsigned char SLI : 8;
13843 #endif
13844                 } BIT;
13845                 } SLIBR201;
13846                 union {
13847                     unsigned char BYTE;
13848                     struct {
13849
13850 #ifdef __RX_LITTLE_ENDIAN__
13851                     unsigned char SLI : 8;
13852 #else
13853                     unsigned char SLI : 8;
13854 #endif
13855                     } BIT;
13856                     } SLIBR202;
13857                     union {
13858                         unsigned char BYTE;
13859                         struct {
13860
13861 #ifdef __RX_LITTLE_ENDIAN__
13862                         unsigned char SLI : 8;
13863 #else
13864                         unsigned char SLI : 8;
13865 #endif
13866                         } BIT;
13867                         } SLIBR203;
13868                         union {
13869                             unsigned char BYTE;
13870                             struct {
13871
13872 #ifdef __RX_LITTLE_ENDIAN__
13873                             unsigned char SLI : 8;
13874 #else
13875                             unsigned char SLI : 8;
13876 #endif
13877                             } BIT;
13878                             } SLIBR204;
13879                             union {
13880                                 unsigned char BYTE;
13881                                 struct {
13882
13883 #ifdef __RX_LITTLE_ENDIAN__
13884                                 unsigned char SLI : 8;
13885 #else
13886                                 unsigned char SLI : 8;
13887 #endif
13888                                 } BIT;
13889                                 } SLIBR205;
13890                                 union {
13891                                     unsigned char BYTE;
13892                                     struct {
13893
13894 #ifdef __RX_LITTLE_ENDIAN__
```

```

13895         unsigned char SLI : 8;
13896 #else
13897         unsigned char SLI : 8;
13898 #endif
13899     } BIT;
13900     } SLIBR206;
13901     union {
13902         unsigned char BYTE;
13903         struct {
13904
13905 #ifdef __RX_LITTLE_ENDIAN__
13906         unsigned char SLI : 8;
13907 #else
13908         unsigned char SLI : 8;
13909 #endif
13910     } BIT;
13911     } SLIBR207;
13912     char          wk24[96];
13913     union {
13914         unsigned long LONG;
13915         struct {
13916
13917 #ifdef __RX_LITTLE_ENDIAN__
13918         unsigned long IS0 : 1;
13919         unsigned long IS1 : 1;
13920         unsigned long IS2 : 1;
13921         unsigned long IS3 : 1;
13922         unsigned long IS4 : 1;
13923         unsigned long IS5 : 1;
13924         unsigned long IS6 : 1;
13925         unsigned long IS7 : 1;
13926         unsigned long IS8 : 1;
13927         unsigned long IS9 : 1;
13928         unsigned long IS10 : 1;
13929         unsigned long IS11 : 1;
13930         unsigned long IS12 : 1;
13931         unsigned long IS13 : 1;
13932         unsigned long IS14 : 1;
13933         unsigned long IS15 : 1;
13934         unsigned long IS16 : 1;
13935         unsigned long IS17 : 1;
13936         unsigned long IS18 : 1;
13937         unsigned long IS19 : 1;
13938         unsigned long IS20 : 1;
13939         unsigned long IS21 : 1;
13940         unsigned long IS22 : 1;
13941         unsigned long IS23 : 1;
13942         unsigned long IS24 : 1;
13943         unsigned long IS25 : 1;
13944         unsigned long IS26 : 1;
13945         unsigned long IS27 : 1;
13946         unsigned long IS28 : 1;
13947         unsigned long IS29 : 1;
13948         unsigned long IS30 : 1;
13949         unsigned long IS31 : 1;
13950 #else
13951         unsigned long IS31 : 1;
13952         unsigned long IS30 : 1;
13953         unsigned long IS29 : 1;
13954         unsigned long IS28 : 1;
13955         unsigned long IS27 : 1;
13956         unsigned long IS26 : 1;
13957         unsigned long IS25 : 1;
13958         unsigned long IS24 : 1;
13959         unsigned long IS23 : 1;
13960         unsigned long IS22 : 1;
13961         unsigned long IS21 : 1;
13962         unsigned long IS20 : 1;
13963         unsigned long IS19 : 1;
13964         unsigned long IS18 : 1;
13965         unsigned long IS17 : 1;
13966         unsigned long IS16 : 1;
13967         unsigned long IS15 : 1;
13968         unsigned long IS14 : 1;
13969         unsigned long IS13 : 1;
13970         unsigned long IS12 : 1;
13971         unsigned long IS11 : 1;
13972         unsigned long IS10 : 1;
13973         unsigned long IS9 : 1;
13974         unsigned long IS8 : 1;
13975         unsigned long IS7 : 1;
13976         unsigned long IS6 : 1;
13977         unsigned long IS5 : 1;
13978         unsigned long IS4 : 1;
13979         unsigned long IS3 : 1;
13980         unsigned long IS2 : 1;
13981         unsigned long IS1 : 1;

```

```
13982         unsigned long IS0 : 1;
13983 #endif
13984     } BIT;
13985     } GRPAL0;
13986     union {
13987         unsigned long LONG;
13988         struct {
13989
13990 #ifdef __RX_LITTLE_ENDIAN__
13991         unsigned long IS0 : 1;
13992         unsigned long IS1 : 1;
13993         unsigned long IS2 : 1;
13994         unsigned long IS3 : 1;
13995         unsigned long IS4 : 1;
13996         unsigned long IS5 : 1;
13997         unsigned long IS6 : 1;
13998         unsigned long IS7 : 1;
13999         unsigned long IS8 : 1;
14000         unsigned long IS9 : 1;
14001         unsigned long IS10 : 1;
14002         unsigned long IS11 : 1;
14003         unsigned long IS12 : 1;
14004         unsigned long IS13 : 1;
14005         unsigned long IS14 : 1;
14006         unsigned long IS15 : 1;
14007         unsigned long IS16 : 1;
14008         unsigned long IS17 : 1;
14009         unsigned long IS18 : 1;
14010         unsigned long IS19 : 1;
14011         unsigned long IS20 : 1;
14012         unsigned long IS21 : 1;
14013         unsigned long IS22 : 1;
14014         unsigned long IS23 : 1;
14015         unsigned long IS24 : 1;
14016         unsigned long IS25 : 1;
14017         unsigned long IS26 : 1;
14018         unsigned long IS27 : 1;
14019         unsigned long IS28 : 1;
14020         unsigned long IS29 : 1;
14021         unsigned long IS30 : 1;
14022         unsigned long IS31 : 1;
14023 #else
14024         unsigned long IS31 : 1;
14025         unsigned long IS30 : 1;
14026         unsigned long IS29 : 1;
14027         unsigned long IS28 : 1;
14028         unsigned long IS27 : 1;
14029         unsigned long IS26 : 1;
14030         unsigned long IS25 : 1;
14031         unsigned long IS24 : 1;
14032         unsigned long IS23 : 1;
14033         unsigned long IS22 : 1;
14034         unsigned long IS21 : 1;
14035         unsigned long IS20 : 1;
14036         unsigned long IS19 : 1;
14037         unsigned long IS18 : 1;
14038         unsigned long IS17 : 1;
14039         unsigned long IS16 : 1;
14040         unsigned long IS15 : 1;
14041         unsigned long IS14 : 1;
14042         unsigned long IS13 : 1;
14043         unsigned long IS12 : 1;
14044         unsigned long IS11 : 1;
14045         unsigned long IS10 : 1;
14046         unsigned long IS9 : 1;
14047         unsigned long IS8 : 1;
14048         unsigned long IS7 : 1;
14049         unsigned long IS6 : 1;
14050         unsigned long IS5 : 1;
14051         unsigned long IS4 : 1;
14052         unsigned long IS3 : 1;
14053         unsigned long IS2 : 1;
14054         unsigned long IS1 : 1;
14055         unsigned long IS0 : 1;
14056 #endif
14057     } BIT;
14058     } GRPAL1;
14059     char    wk25[56];
14060     union {
14061         unsigned long LONG;
14062         struct {
14063
14064 #ifdef __RX_LITTLE_ENDIAN__
14065         unsigned long EN0 : 1;
14066         unsigned long EN1 : 1;
14067         unsigned long EN2 : 1;
14068         unsigned long EN3 : 1;
```

```
14069     unsigned long EN4 : 1;
14070     unsigned long EN5 : 1;
14071     unsigned long EN6 : 1;
14072     unsigned long EN7 : 1;
14073     unsigned long EN8 : 1;
14074     unsigned long EN9 : 1;
14075     unsigned long EN10 : 1;
14076     unsigned long EN11 : 1;
14077     unsigned long EN12 : 1;
14078     unsigned long EN13 : 1;
14079     unsigned long EN14 : 1;
14080     unsigned long EN15 : 1;
14081     unsigned long EN16 : 1;
14082     unsigned long EN17 : 1;
14083     unsigned long EN18 : 1;
14084     unsigned long EN19 : 1;
14085     unsigned long EN20 : 1;
14086     unsigned long EN21 : 1;
14087     unsigned long EN22 : 1;
14088     unsigned long EN23 : 1;
14089     unsigned long EN24 : 1;
14090     unsigned long EN25 : 1;
14091     unsigned long EN26 : 1;
14092     unsigned long EN27 : 1;
14093     unsigned long EN28 : 1;
14094     unsigned long EN29 : 1;
14095     unsigned long EN30 : 1;
14096     unsigned long EN31 : 1;
14097 #else
14098     unsigned long EN31 : 1;
14099     unsigned long EN30 : 1;
14100     unsigned long EN29 : 1;
14101     unsigned long EN28 : 1;
14102     unsigned long EN27 : 1;
14103     unsigned long EN26 : 1;
14104     unsigned long EN25 : 1;
14105     unsigned long EN24 : 1;
14106     unsigned long EN23 : 1;
14107     unsigned long EN22 : 1;
14108     unsigned long EN21 : 1;
14109     unsigned long EN20 : 1;
14110     unsigned long EN19 : 1;
14111     unsigned long EN18 : 1;
14112     unsigned long EN17 : 1;
14113     unsigned long EN16 : 1;
14114     unsigned long EN15 : 1;
14115     unsigned long EN14 : 1;
14116     unsigned long EN13 : 1;
14117     unsigned long EN12 : 1;
14118     unsigned long EN11 : 1;
14119     unsigned long EN10 : 1;
14120     unsigned long EN9 : 1;
14121     unsigned long EN8 : 1;
14122     unsigned long EN7 : 1;
14123     unsigned long EN6 : 1;
14124     unsigned long EN5 : 1;
14125     unsigned long EN4 : 1;
14126     unsigned long EN3 : 1;
14127     unsigned long EN2 : 1;
14128     unsigned long EN1 : 1;
14129     unsigned long EN0 : 1;
14130 #endif
14131     } BIT;
14132     } GENAL0;
14133     union {
14134         unsigned long LONG;
14135         struct {
14136
14137 #ifdef __RX_LITTLE_ENDIAN__
14138         unsigned long EN0 : 1;
14139         unsigned long EN1 : 1;
14140         unsigned long EN2 : 1;
14141         unsigned long EN3 : 1;
14142         unsigned long EN4 : 1;
14143         unsigned long EN5 : 1;
14144         unsigned long EN6 : 1;
14145         unsigned long EN7 : 1;
14146         unsigned long EN8 : 1;
14147         unsigned long EN9 : 1;
14148         unsigned long EN10 : 1;
14149         unsigned long EN11 : 1;
14150         unsigned long EN12 : 1;
14151         unsigned long EN13 : 1;
14152         unsigned long EN14 : 1;
14153         unsigned long EN15 : 1;
14154         unsigned long EN16 : 1;
14155         unsigned long EN17 : 1;
```

```
14156     unsigned long EN18 : 1;
14157     unsigned long EN19 : 1;
14158     unsigned long EN20 : 1;
14159     unsigned long EN21 : 1;
14160     unsigned long EN22 : 1;
14161     unsigned long EN23 : 1;
14162     unsigned long EN24 : 1;
14163     unsigned long EN25 : 1;
14164     unsigned long EN26 : 1;
14165     unsigned long EN27 : 1;
14166     unsigned long EN28 : 1;
14167     unsigned long EN29 : 1;
14168     unsigned long EN30 : 1;
14169     unsigned long EN31 : 1;
14170 #else
14171     unsigned long EN31 : 1;
14172     unsigned long EN30 : 1;
14173     unsigned long EN29 : 1;
14174     unsigned long EN28 : 1;
14175     unsigned long EN27 : 1;
14176     unsigned long EN26 : 1;
14177     unsigned long EN25 : 1;
14178     unsigned long EN24 : 1;
14179     unsigned long EN23 : 1;
14180     unsigned long EN22 : 1;
14181     unsigned long EN21 : 1;
14182     unsigned long EN20 : 1;
14183     unsigned long EN19 : 1;
14184     unsigned long EN18 : 1;
14185     unsigned long EN17 : 1;
14186     unsigned long EN16 : 1;
14187     unsigned long EN15 : 1;
14188     unsigned long EN14 : 1;
14189     unsigned long EN13 : 1;
14190     unsigned long EN12 : 1;
14191     unsigned long EN11 : 1;
14192     unsigned long EN10 : 1;
14193     unsigned long EN9 : 1;
14194     unsigned long EN8 : 1;
14195     unsigned long EN7 : 1;
14196     unsigned long EN6 : 1;
14197     unsigned long EN5 : 1;
14198     unsigned long EN4 : 1;
14199     unsigned long EN3 : 1;
14200     unsigned long EN2 : 1;
14201     unsigned long EN1 : 1;
14202     unsigned long EN0 : 1;
14203 #endif
14204     } BIT;
14205     } GENAL1;
14206     char      wk26[136];
14207     union {
14208         unsigned char BYTE;
14209         struct {
14210
14211 #ifdef __RX_LITTLE_ENDIAN__
14212         unsigned char PIR0 : 1;
14213         unsigned char PIR1 : 1;
14214         unsigned char PIR2 : 1;
14215         unsigned char PIR3 : 1;
14216         unsigned char PIR4 : 1;
14217         unsigned char PIR5 : 1;
14218         unsigned char PIR6 : 1;
14219         unsigned char PIR7 : 1;
14220 #else
14221         unsigned char PIR7 : 1;
14222         unsigned char PIR6 : 1;
14223         unsigned char PIR5 : 1;
14224         unsigned char PIR4 : 1;
14225         unsigned char PIR3 : 1;
14226         unsigned char PIR2 : 1;
14227         unsigned char PIR1 : 1;
14228         unsigned char PIR0 : 1;
14229 #endif
14230         } BIT;
14231         } PIAR0;
14232     union {
14233         unsigned char BYTE;
14234         struct {
14235
14236 #ifdef __RX_LITTLE_ENDIAN__
14237         unsigned char PIR0 : 1;
14238         unsigned char PIR1 : 1;
14239         unsigned char PIR2 : 1;
14240         unsigned char PIR3 : 1;
14241         unsigned char PIR4 : 1;
14242         unsigned char PIR5 : 1;
```

```
14243         unsigned char PIR6 : 1;
14244         unsigned char PIR7 : 1;
14245 #else
14246         unsigned char PIR7 : 1;
14247         unsigned char PIR6 : 1;
14248         unsigned char PIR5 : 1;
14249         unsigned char PIR4 : 1;
14250         unsigned char PIR3 : 1;
14251         unsigned char PIR2 : 1;
14252         unsigned char PIR1 : 1;
14253         unsigned char PIR0 : 1;
14254 #endif
14255     } BIT;
14256     } PIAR1;
14257     union {
14258         unsigned char BYTE;
14259         struct {
14260
14261 #ifdef __RX_LITTLE_ENDIAN__
14262         unsigned char PIR0 : 1;
14263         unsigned char PIR1 : 1;
14264         unsigned char PIR2 : 1;
14265         unsigned char PIR3 : 1;
14266         unsigned char PIR4 : 1;
14267         unsigned char PIR5 : 1;
14268         unsigned char PIR6 : 1;
14269         unsigned char PIR7 : 1;
14270 #else
14271         unsigned char PIR7 : 1;
14272         unsigned char PIR6 : 1;
14273         unsigned char PIR5 : 1;
14274         unsigned char PIR4 : 1;
14275         unsigned char PIR3 : 1;
14276         unsigned char PIR2 : 1;
14277         unsigned char PIR1 : 1;
14278         unsigned char PIR0 : 1;
14279 #endif
14280     } BIT;
14281     } PIAR2;
14282     union {
14283         unsigned char BYTE;
14284         struct {
14285
14286 #ifdef __RX_LITTLE_ENDIAN__
14287         unsigned char PIR0 : 1;
14288         unsigned char PIR1 : 1;
14289         unsigned char PIR2 : 1;
14290         unsigned char PIR3 : 1;
14291         unsigned char PIR4 : 1;
14292         unsigned char PIR5 : 1;
14293         unsigned char PIR6 : 1;
14294         unsigned char PIR7 : 1;
14295 #else
14296         unsigned char PIR7 : 1;
14297         unsigned char PIR6 : 1;
14298         unsigned char PIR5 : 1;
14299         unsigned char PIR4 : 1;
14300         unsigned char PIR3 : 1;
14301         unsigned char PIR2 : 1;
14302         unsigned char PIR1 : 1;
14303         unsigned char PIR0 : 1;
14304 #endif
14305     } BIT;
14306     } PIAR3;
14307     union {
14308         unsigned char BYTE;
14309         struct {
14310
14311 #ifdef __RX_LITTLE_ENDIAN__
14312         unsigned char PIR0 : 1;
14313         unsigned char PIR1 : 1;
14314         unsigned char PIR2 : 1;
14315         unsigned char PIR3 : 1;
14316         unsigned char PIR4 : 1;
14317         unsigned char PIR5 : 1;
14318         unsigned char PIR6 : 1;
14319         unsigned char PIR7 : 1;
14320 #else
14321         unsigned char PIR7 : 1;
14322         unsigned char PIR6 : 1;
14323         unsigned char PIR5 : 1;
14324         unsigned char PIR4 : 1;
14325         unsigned char PIR3 : 1;
14326         unsigned char PIR2 : 1;
14327         unsigned char PIR1 : 1;
14328         unsigned char PIR0 : 1;
14329 #endif
14329 #endif
```

```
14330     } BIT;
14331     } PIAR4;
14332     union {
14333         unsigned char BYTE;
14334         struct {
14335
14336 #ifdef __RX_LITTLE_ENDIAN__
14337         unsigned char PIR0 : 1;
14338         unsigned char PIR1 : 1;
14339         unsigned char PIR2 : 1;
14340         unsigned char PIR3 : 1;
14341         unsigned char PIR4 : 1;
14342         unsigned char PIR5 : 1;
14343         unsigned char PIR6 : 1;
14344         unsigned char PIR7 : 1;
14345 #else
14346         unsigned char PIR7 : 1;
14347         unsigned char PIR6 : 1;
14348         unsigned char PIR5 : 1;
14349         unsigned char PIR4 : 1;
14350         unsigned char PIR3 : 1;
14351         unsigned char PIR2 : 1;
14352         unsigned char PIR1 : 1;
14353         unsigned char PIR0 : 1;
14354 #endif
14355     } BIT;
14356     } PIAR5;
14357     union {
14358         unsigned char BYTE;
14359         struct {
14360
14361 #ifdef __RX_LITTLE_ENDIAN__
14362         unsigned char PIR0 : 1;
14363         unsigned char PIR1 : 1;
14364         unsigned char PIR2 : 1;
14365         unsigned char PIR3 : 1;
14366         unsigned char PIR4 : 1;
14367         unsigned char PIR5 : 1;
14368         unsigned char PIR6 : 1;
14369         unsigned char PIR7 : 1;
14370 #else
14371         unsigned char PIR7 : 1;
14372         unsigned char PIR6 : 1;
14373         unsigned char PIR5 : 1;
14374         unsigned char PIR4 : 1;
14375         unsigned char PIR3 : 1;
14376         unsigned char PIR2 : 1;
14377         unsigned char PIR1 : 1;
14378         unsigned char PIR0 : 1;
14379 #endif
14380     } BIT;
14381     } PIAR6;
14382     union {
14383         unsigned char BYTE;
14384         struct {
14385
14386 #ifdef __RX_LITTLE_ENDIAN__
14387         unsigned char PIR0 : 1;
14388         unsigned char PIR1 : 1;
14389         unsigned char PIR2 : 1;
14390         unsigned char PIR3 : 1;
14391         unsigned char PIR4 : 1;
14392         unsigned char PIR5 : 1;
14393         unsigned char PIR6 : 1;
14394         unsigned char PIR7 : 1;
14395 #else
14396         unsigned char PIR7 : 1;
14397         unsigned char PIR6 : 1;
14398         unsigned char PIR5 : 1;
14399         unsigned char PIR4 : 1;
14400         unsigned char PIR3 : 1;
14401         unsigned char PIR2 : 1;
14402         unsigned char PIR1 : 1;
14403         unsigned char PIR0 : 1;
14404 #endif
14405     } BIT;
14406     } PIAR7;
14407     union {
14408         unsigned char BYTE;
14409         struct {
14410
14411 #ifdef __RX_LITTLE_ENDIAN__
14412         unsigned char PIR0 : 1;
14413         unsigned char PIR1 : 1;
14414         unsigned char PIR2 : 1;
14415         unsigned char PIR3 : 1;
14416         unsigned char PIR4 : 1;
```

```

14417         unsigned char PIR5 : 1;
14418         unsigned char PIR6 : 1;
14419         unsigned char PIR7 : 1;
14420 #else
14421         unsigned char PIR7 : 1;
14422         unsigned char PIR6 : 1;
14423         unsigned char PIR5 : 1;
14424         unsigned char PIR4 : 1;
14425         unsigned char PIR3 : 1;
14426         unsigned char PIR2 : 1;
14427         unsigned char PIR1 : 1;
14428         unsigned char PIR0 : 1;
14429 #endif
14430     } BIT;
14431     } PIAR8;
14432     union {
14433         unsigned char BYTE;
14434         struct {
14435
14436 #ifdef __RX_LITTLE_ENDIAN__
14437         unsigned char PIR0 : 1;
14438         unsigned char PIR1 : 1;
14439         unsigned char PIR2 : 1;
14440         unsigned char PIR3 : 1;
14441         unsigned char PIR4 : 1;
14442         unsigned char PIR5 : 1;
14443         unsigned char PIR6 : 1;
14444         unsigned char PIR7 : 1;
14445 #else
14446         unsigned char PIR7 : 1;
14447         unsigned char PIR6 : 1;
14448         unsigned char PIR5 : 1;
14449         unsigned char PIR4 : 1;
14450         unsigned char PIR3 : 1;
14451         unsigned char PIR2 : 1;
14452         unsigned char PIR1 : 1;
14453         unsigned char PIR0 : 1;
14454 #endif
14455     } BIT;
14456     } PIAR9;
14457     union {
14458         unsigned char BYTE;
14459         struct {
14460
14461 #ifdef __RX_LITTLE_ENDIAN__
14462         unsigned char PIR0 : 1;
14463         unsigned char PIR1 : 1;
14464         unsigned char PIR2 : 1;
14465         unsigned char PIR3 : 1;
14466         unsigned char PIR4 : 1;
14467         unsigned char PIR5 : 1;
14468         unsigned char PIR6 : 1;
14469         unsigned char PIR7 : 1;
14470 #else
14471         unsigned char PIR7 : 1;
14472         unsigned char PIR6 : 1;
14473         unsigned char PIR5 : 1;
14474         unsigned char PIR4 : 1;
14475         unsigned char PIR3 : 1;
14476         unsigned char PIR2 : 1;
14477         unsigned char PIR1 : 1;
14478         unsigned char PIR0 : 1;
14479 #endif
14480     } BIT;
14481     } PIARA;
14482     char          wk27[1];
14483     union {
14484         unsigned char BYTE;
14485         struct {
14486
14487 #ifdef __RX_LITTLE_ENDIAN__
14488         unsigned char PIR0 : 1;
14489         unsigned char PIR1 : 1;
14490         unsigned char PIR2 : 1;
14491         unsigned char PIR3 : 1;
14492         unsigned char PIR4 : 1;
14493         unsigned char PIR5 : 1;
14494         unsigned char PIR6 : 1;
14495         unsigned char PIR7 : 1;
14496 #else
14497         unsigned char PIR7 : 1;
14498         unsigned char PIR6 : 1;
14499         unsigned char PIR5 : 1;
14500         unsigned char PIR4 : 1;
14501         unsigned char PIR3 : 1;
14502         unsigned char PIR2 : 1;
14503         unsigned char PIR1 : 1;

```

```
14504         unsigned char PIR0 : 1;
14505 #endif
14506     } BIT;
14507     } PIARC;
14508     char      wk28[195];
14509     union {
14510         unsigned char BYTE;
14511     } SLIAR208;
14512     union {
14513         unsigned char BYTE;
14514     } SLIAR209;
14515     union {
14516         unsigned char BYTE;
14517     } SLIAR210;
14518     union {
14519         unsigned char BYTE;
14520     } SLIAR211;
14521     union {
14522         unsigned char BYTE;
14523     } SLIAR212;
14524     union {
14525         unsigned char BYTE;
14526     } SLIAR213;
14527     union {
14528         unsigned char BYTE;
14529     } SLIAR214;
14530     union {
14531         unsigned char BYTE;
14532     } SLIAR215;
14533     union {
14534         unsigned char BYTE;
14535     } SLIAR216;
14536     union {
14537         unsigned char BYTE;
14538     } SLIAR217;
14539     union {
14540         unsigned char BYTE;
14541     } SLIAR218;
14542     union {
14543         unsigned char BYTE;
14544     } SLIAR219;
14545     union {
14546         unsigned char BYTE;
14547     } SLIAR220;
14548     union {
14549         unsigned char BYTE;
14550     } SLIAR221;
14551     union {
14552         unsigned char BYTE;
14553     } SLIAR222;
14554     union {
14555         unsigned char BYTE;
14556     } SLIAR223;
14557     union {
14558         unsigned char BYTE;
14559     } SLIAR224;
14560     union {
14561         unsigned char BYTE;
14562     } SLIAR225;
14563     union {
14564         unsigned char BYTE;
14565     } SLIAR226;
14566     union {
14567         unsigned char BYTE;
14568     } SLIAR227;
14569     union {
14570         unsigned char BYTE;
14571     } SLIAR228;
14572     union {
14573         unsigned char BYTE;
14574     } SLIAR229;
14575     union {
14576         unsigned char BYTE;
14577     } SLIAR230;
14578     union {
14579         unsigned char BYTE;
14580     } SLIAR231;
14581     union {
14582         unsigned char BYTE;
14583     } SLIAR232;
14584     union {
14585         unsigned char BYTE;
14586     } SLIAR233;
14587     union {
14588         unsigned char BYTE;
14589     } SLIAR234;
14590     union {
```

```

14591     unsigned char BYTE;
14592 } SLIAR235;
14593 union {
14594     unsigned char BYTE;
14595 } SLIAR236;
14596 union {
14597     unsigned char BYTE;
14598 } SLIAR237;
14599 union {
14600     unsigned char BYTE;
14601 } SLIAR238;
14602 union {
14603     unsigned char BYTE;
14604 } SLIAR239;
14605 union {
14606     unsigned char BYTE;
14607 } SLIAR240;
14608 union {
14609     unsigned char BYTE;
14610 } SLIAR241;
14611 union {
14612     unsigned char BYTE;
14613 } SLIAR242;
14614 union {
14615     unsigned char BYTE;
14616 } SLIAR243;
14617 union {
14618     unsigned char BYTE;
14619 } SLIAR244;
14620 union {
14621     unsigned char BYTE;
14622 } SLIAR245;
14623 union {
14624     unsigned char BYTE;
14625 } SLIAR246;
14626 union {
14627     unsigned char BYTE;
14628 } SLIAR247;
14629 union {
14630     unsigned char BYTE;
14631 } SLIAR248;
14632 union {
14633     unsigned char BYTE;
14634 } SLIAR249;
14635 union {
14636     unsigned char BYTE;
14637 } SLIAR250;
14638 union {
14639     unsigned char BYTE;
14640 } SLIAR251;
14641 union {
14642     unsigned char BYTE;
14643 } SLIAR252;
14644 union {
14645     unsigned char BYTE;
14646 } SLIAR253;
14647 union {
14648     unsigned char BYTE;
14649 } SLIAR254;
14650 union {
14651     unsigned char BYTE;
14652 } SLIAR255;
14653 union {
14654     unsigned char BYTE;
14655     struct {
14656
14657 #ifdef __RX_LITTLE_ENDIAN__
14658     unsigned char WPRC : 1;
14659     unsigned char   : 7;
14660 #else
14661     unsigned char   : 7;
14662     unsigned char WPRC : 1;
14663 #endif
14664     } BIT;
14665     } SLIPRCR;
14666     union {
14667         unsigned char BYTE;
14668         struct {
14669
14670 #ifdef __RX_LITTLE_ENDIAN__
14671         unsigned char SELEXD0 : 1;
14672         unsigned char SELEXD1 : 1;
14673         unsigned char   : 6;
14674 #else
14675         unsigned char   : 6;
14676         unsigned char SELEXD1 : 1;
14677         unsigned char SELEXD0 : 1;

```

```

14678 #endif
14679     } BIT;
14680     } SELEXDR;
14681 } st_icu_t;
14682
14683 typedef struct st_iwdt {
14684     unsigned char IWDTRR;
14685     char          wk0[1];
14686     union {
14687         unsigned short WORD;
14688     } struct {
14689
14690 #ifdef __RX_LITTLE_ENDIAN__
14691         unsigned short TOPS : 2;
14692         unsigned short : 2;
14693         unsigned short CKS : 4;
14694         unsigned short RPES : 2;
14695         unsigned short : 2;
14696         unsigned short RPSS : 2;
14697         unsigned short : 2;
14698 #else
14699         unsigned short : 2;
14700         unsigned short RPSS : 2;
14701         unsigned short : 2;
14702         unsigned short RPES : 2;
14703         unsigned short CKS : 4;
14704         unsigned short : 2;
14705         unsigned short TOPS : 2;
14706 #endif
14707     } BIT;
14708     } IWDTCR;
14709     union {
14710         unsigned short WORD;
14711     } struct {
14712
14713 #ifdef __RX_LITTLE_ENDIAN__
14714         unsigned short CNTVAL : 14;
14715         unsigned short UNDFE : 1;
14716         unsigned short REFEF : 1;
14717 #else
14718         unsigned short REFEF : 1;
14719         unsigned short UNDFE : 1;
14720         unsigned short CNTVAL : 14;
14721 #endif
14722     } BIT;
14723     } IWDTSR;
14724     union {
14725         unsigned char BYTE;
14726     } struct {
14727
14728 #ifdef __RX_LITTLE_ENDIAN__
14729         unsigned char : 7;
14730         unsigned char RSTIRQS : 1;
14731 #else
14732         unsigned char RSTIRQS : 1;
14733         unsigned char : 7;
14734 #endif
14735     } BIT;
14736     } IWDTRCR;
14737     char          wk1[1];
14738     union {
14739         unsigned char BYTE;
14740     } struct {
14741
14742 #ifdef __RX_LITTLE_ENDIAN__
14743         unsigned char : 7;
14744         unsigned char SLCSTP : 1;
14745 #else
14746         unsigned char SLCSTP : 1;
14747         unsigned char : 7;
14748 #endif
14749     } BIT;
14750     } IWDTCSTPR;
14751 } st_iwdt_t;
14752
14753 typedef struct st_mmcif {
14754     union {
14755         unsigned long LONG;
14756 #ifdef IODEFINE_H_HISTORY
14757     } struct {
14758
14759 #ifdef __RX_LITTLE_ENDIAN__
14760         unsigned long DATW : 2;
14761         unsigned long : 1;
14762         unsigned long SBIT : 1;
14763         unsigned long : 2;
14764         unsigned long OPDM : 1;

```

```

14765     unsigned long TBIT : 1;
14766     unsigned long CRCSTE : 1;
14767     unsigned long BOOTACK : 1;
14768     unsigned long CRC16C : 1;
14769     unsigned long   : 1;
14770     unsigned long RCRC7C : 2;
14771     unsigned long RIDXC : 2;
14772     unsigned long CMD12EN : 1;
14773     unsigned long CMLTE : 1;
14774     unsigned long DWEN : 1;
14775     unsigned long WDAT : 1;
14776     unsigned long   : 1;
14777     unsigned long RBSY : 1;
14778     unsigned long RTYP : 2;
14779     unsigned long CMD : 6;
14780     unsigned long BOOT : 1;
14781     unsigned long   : 1;
14782 #else
14783     unsigned long   : 1;
14784     unsigned long BOOT : 1;
14785     unsigned long CMD : 6;
14786     unsigned long RTYP : 2;
14787     unsigned long RBSY : 1;
14788     unsigned long   : 1;
14789     unsigned long WDAT : 1;
14790     unsigned long DWEN : 1;
14791     unsigned long CMLTE : 1;
14792     unsigned long CMD12EN : 1;
14793     unsigned long RIDXC : 2;
14794     unsigned long RCRC7C : 2;
14795     unsigned long   : 1;
14796     unsigned long CRC16C : 1;
14797     unsigned long BOOTACK : 1;
14798     unsigned long CRCSTE : 1;
14799     unsigned long TBIT : 1;
14800     unsigned long OPDM : 1;
14801     unsigned long   : 2;
14802     unsigned long SBIT : 1;
14803     unsigned long   : 1;
14804     unsigned long DATW : 2;
14805 #endif
14806 } BIT;
14807 #endif
14808 } CECMDSET;
14809 char   wk0[4];
14810 union {
14811     unsigned long LONG;
14812 } CEARG;
14813 union {
14814     unsigned long LONG;
14815     struct {
14816
14817 #ifdef __RX_LITTLE_ENDIAN__
14818     unsigned long C12ARG : 32;
14819 #else
14820     unsigned long C12ARG : 32;
14821 #endif
14822     } BIT;
14823     } CEARGCMD12;
14824     union {
14825         unsigned long LONG;
14826         struct {
14827
14828 #ifdef __RX_LITTLE_ENDIAN__
14829         unsigned long BREAK : 1;
14830         unsigned long   : 31;
14831 #else
14832         unsigned long   : 31;
14833         unsigned long BREAK : 1;
14834 #endif
14835         } BIT;
14836         } CECMDCTRL;
14837         union {
14838             unsigned long LONG;
14839             struct {
14840
14841 #ifdef __RX_LITTLE_ENDIAN__
14842             unsigned long BLKSIZ : 16;
14843             unsigned long BLKCNT : 16;
14844 #else
14845             unsigned long BLKCNT : 16;
14846             unsigned long BLKSIZ : 16;
14847 #endif
14848             } BIT;
14849             } CEBLOCKSET;
14850             union {
14851                 unsigned long LONG;

```

```

14852     struct {
14853
14854 #ifdef __RX_LITTLE_ENDIAN__
14855     unsigned long : 4;
14856     unsigned long SRWDTO : 4;
14857     unsigned long SRBSYTO : 4;
14858     unsigned long SRSPTO : 2;
14859     unsigned long : 2;
14860     unsigned long CLKDIV : 4;
14861     unsigned long : 4;
14862     unsigned long CLKEN : 1;
14863     unsigned long : 6;
14864     unsigned long MMCBUSBSY : 1;
14865 #else
14866     unsigned long MMCBUSBSY : 1;
14867     unsigned long : 6;
14868     unsigned long CLKEN : 1;
14869     unsigned long : 4;
14870     unsigned long CLKDIV : 4;
14871     unsigned long : 2;
14872     unsigned long SRSPTO : 2;
14873     unsigned long SRBSYTO : 4;
14874     unsigned long SRWDTO : 4;
14875     unsigned long : 4;
14876 #endif
14877     } BIT;
14878     } CECLKCTRL;
14879     union {
14880         unsigned long LONG;
14881         struct {
14882
14883 #ifdef __RX_LITTLE_ENDIAN__
14884         unsigned long : 16;
14885         unsigned long ATYP : 1;
14886         unsigned long : 7;
14887         unsigned long DMAREN : 1;
14888         unsigned long DMAWEN : 1;
14889         unsigned long DMATYP : 1;
14890         unsigned long : 5;
14891 #else
14892         unsigned long : 5;
14893         unsigned long DMATYP : 1;
14894         unsigned long DMAWEN : 1;
14895         unsigned long DMAREN : 1;
14896         unsigned long : 7;
14897         unsigned long ATYP : 1;
14898         unsigned long : 16;
14899 #endif
14900         } BIT;
14901         } CEBUFACC;
14902         unsigned long CERESP3;
14903         unsigned long CERESP2;
14904         unsigned long CERESP1;
14905         unsigned long CERESP0;
14906         union {
14907             unsigned long LONG;
14908             struct {
14909
14910 #ifdef __RX_LITTLE_ENDIAN__
14911             unsigned long RSP12 : 32;
14912 #else
14913             unsigned long RSP12 : 32;
14914 #endif
14915             } BIT;
14916             } CERESPCMD12;
14917             unsigned long CEDATA;
14918             char wk1[4];
14919             union {
14920                 unsigned long LONG;
14921                 struct {
14922
14923 #ifdef __RX_LITTLE_ENDIAN__
14924                 unsigned long : 16;
14925                 unsigned long SBTDATTO : 4;
14926                 unsigned long SFSTBTDATTO : 4;
14927                 unsigned long SBTACKTO : 4;
14928                 unsigned long SBTCLKDIV : 4;
14929 #else
14930                 unsigned long SBTCLKDIV : 4;
14931                 unsigned long SBTACKTO : 4;
14932                 unsigned long SFSTBTDATTO : 4;
14933                 unsigned long SBTDATTO : 4;
14934                 unsigned long : 16;
14935 #endif
14936                 } BIT;
14937                 } CEBOOT;
14938             union {

```

```

14939     unsigned long LONG;
14940     struct {
14941
14942 #ifdef __RX_LITTLE_ENDIAN__
14943     unsigned long RSPTO : 1;
14944     unsigned long RBSYTO : 1;
14945     unsigned long RDATTO : 1;
14946     unsigned long WDATTO : 1;
14947     unsigned long CRCSTO : 1;
14948     unsigned long      : 3;
14949     unsigned long RSPERR : 1;
14950     unsigned long RIDXERR : 1;
14951     unsigned long RDATERR : 1;
14952     unsigned long WDATERR : 1;
14953     unsigned long      : 2;
14954     unsigned long BUFVIO : 1;
14955     unsigned long CMDVIO : 1;
14956     unsigned long CRSPE : 1;
14957     unsigned long RBSYE : 1;
14958     unsigned long      : 2;
14959     unsigned long BUFREN : 1;
14960     unsigned long BUFWEN : 1;
14961     unsigned long BUFRE : 1;
14962     unsigned long DTRANE : 1;
14963     unsigned long CMD12CRE : 1;
14964     unsigned long CMD12RBE : 1;
14965     unsigned long CMD12DRE : 1;
14966     unsigned long      : 5;
14967 #else
14968     unsigned long      : 5;
14969     unsigned long CMD12DRE : 1;
14970     unsigned long CMD12RBE : 1;
14971     unsigned long CMD12CRE : 1;
14972     unsigned long DTRANE : 1;
14973     unsigned long BUFRE : 1;
14974     unsigned long BUFWEN : 1;
14975     unsigned long BUFREN : 1;
14976     unsigned long      : 2;
14977     unsigned long RBSYE : 1;
14978     unsigned long CRSPE : 1;
14979     unsigned long CMDVIO : 1;
14980     unsigned long BUFVIO : 1;
14981     unsigned long      : 2;
14982     unsigned long WDATERR : 1;
14983     unsigned long RDATERR : 1;
14984     unsigned long RIDXERR : 1;
14985     unsigned long RSPERR : 1;
14986     unsigned long      : 3;
14987     unsigned long CRCSTO : 1;
14988     unsigned long WDATTO : 1;
14989     unsigned long RDATTO : 1;
14990     unsigned long RBSYTO : 1;
14991     unsigned long RSPTO : 1;
14992 #endif
14993     } BIT;
14994     } CEINT;
14995     union {
14996     unsigned long LONG;
14997     struct {
14998
14999 #ifdef __RX_LITTLE_ENDIAN__
15000     unsigned long MRSPTO : 1;
15001     unsigned long MRBSYTO : 1;
15002     unsigned long MRDATTO : 1;
15003     unsigned long MWDATTO : 1;
15004     unsigned long MCRCSTO : 1;
15005     unsigned long      : 3;
15006     unsigned long MRSPERR : 1;
15007     unsigned long MRIDXERR : 1;
15008     unsigned long MRDATERR : 1;
15009     unsigned long MWDATERR : 1;
15010     unsigned long      : 2;
15011     unsigned long MBUFVIO : 1;
15012     unsigned long MCMDVIO : 1;
15013     unsigned long MCRSPE : 1;
15014     unsigned long MRBSYE : 1;
15015     unsigned long      : 2;
15016     unsigned long MBUFREN : 1;
15017     unsigned long MBUFWEN : 1;
15018     unsigned long MBUFRE : 1;
15019     unsigned long MDTRANE : 1;
15020     unsigned long MCMD12CRE : 1;
15021     unsigned long MCMD12RBE : 1;
15022     unsigned long MCMD12DRE : 1;
15023     unsigned long      : 5;
15024 #else
15025     unsigned long      : 5;

```

```

15026     unsigned long MCMD12DRE : 1;
15027     unsigned long MCMD12RBE : 1;
15028     unsigned long MCMD12CRE : 1;
15029     unsigned long MDTRANE : 1;
15030     unsigned long MBUFRE : 1;
15031     unsigned long MBUFVEN : 1;
15032     unsigned long MBUFREN : 1;
15033     unsigned long : 2;
15034     unsigned long MRBSYE : 1;
15035     unsigned long MCRSPE : 1;
15036     unsigned long MCMDEVIO : 1;
15037     unsigned long MBUFVIO : 1;
15038     unsigned long : 2;
15039     unsigned long MWDATERR : 1;
15040     unsigned long MRDATERR : 1;
15041     unsigned long MRIDXERR : 1;
15042     unsigned long MRSPERR : 1;
15043     unsigned long : 3;
15044     unsigned long MCRCSTO : 1;
15045     unsigned long MWDATTO : 1;
15046     unsigned long MRDATTO : 1;
15047     unsigned long MRBSYTO : 1;
15048     unsigned long MRSPTO : 1;
15049 #endif
15050     } BIT;
15051     } CEINTEN;
15052     union {
15053         unsigned long LONG;
15054     struct {
15055
15056 #ifdef __RX_LITTLE_ENDIAN__
15057         unsigned long RCVBLK : 16;
15058         unsigned long DATSIG : 8;
15059         unsigned long RSPIDX : 6;
15060         unsigned long CMDSIG : 1;
15061         unsigned long CMDSEQ : 1;
15062 #else
15063         unsigned long CMDSEQ : 1;
15064         unsigned long CMDSIG : 1;
15065         unsigned long RSPIDX : 6;
15066         unsigned long DATSIG : 8;
15067         unsigned long RCVBLK : 16;
15068 #endif
15069     } BIT;
15070     } CEHOSTSTS1;
15071     union {
15072         unsigned long LONG;
15073     struct {
15074
15075 #ifdef __RX_LITTLE_ENDIAN__
15076         unsigned long : 5;
15077         unsigned long BTDATTO : 1;
15078         unsigned long FSTBTDATTO : 1;
15079         unsigned long BTACKTO : 1;
15080         unsigned long STRSPTO : 1;
15081         unsigned long AC12RSPTO : 1;
15082         unsigned long RSPBSYTO : 1;
15083         unsigned long AC12BSYTO : 1;
15084         unsigned long CRCSTTO : 1;
15085         unsigned long DATBSYTO : 1;
15086         unsigned long STRDATTO : 1;
15087         unsigned long : 1;
15088         unsigned long CRCST : 3;
15089         unsigned long : 1;
15090         unsigned long BTACKEBE : 1;
15091         unsigned long BTACKPATE : 1;
15092         unsigned long RSPIDX : 1;
15093         unsigned long AC12IDX : 1;
15094         unsigned long RSPEBE : 1;
15095         unsigned long AC12REBE : 1;
15096         unsigned long RDATEBE : 1;
15097         unsigned long CRCSTEBE : 1;
15098         unsigned long RSPCRC7E : 1;
15099         unsigned long AC12CRCE : 1;
15100         unsigned long CRC16E : 1;
15101         unsigned long CRCSTE : 1;
15102 #else
15103         unsigned long CRCSTE : 1;
15104         unsigned long CRC16E : 1;
15105         unsigned long AC12CRCE : 1;
15106         unsigned long RSPCRC7E : 1;
15107         unsigned long CRCSTEBE : 1;
15108         unsigned long RDATEBE : 1;
15109         unsigned long AC12REBE : 1;
15110         unsigned long RSPEBE : 1;
15111         unsigned long AC12IDX : 1;
15112         unsigned long RSPIDX : 1;

```

```

15113         unsigned long BTACKPATE : 1;
15114         unsigned long BTACKEBE : 1;
15115         unsigned long : 1;
15116         unsigned long CRCST : 3;
15117         unsigned long : 1;
15118         unsigned long STRDATTO : 1;
15119         unsigned long DATBSYTO : 1;
15120         unsigned long CRCSTTO : 1;
15121         unsigned long AC12BSYTO : 1;
15122         unsigned long RSPBSYTO : 1;
15123         unsigned long AC12RSPTO : 1;
15124         unsigned long STRSPTO : 1;
15125         unsigned long BTACKTO : 1;
15126         unsigned long FSTBTDATTO : 1;
15127         unsigned long BTDATTO : 1;
15128         unsigned long : 5;
15129 #endif
15130     } BIT;
15131     } CEHOSTSTS2;
15132     char        wk2[32];
15133     union {
15134         unsigned long LONG;
15135         struct {
15136
15137 #ifdef __RX_LITTLE_ENDIAN__
15138         unsigned long : 4;
15139         unsigned long MCDFALL : 1;
15140         unsigned long MCDRISE : 1;
15141         unsigned long : 6;
15142         unsigned long CDFALL : 1;
15143         unsigned long CDRISE : 1;
15144         unsigned long CDSIG : 1;
15145         unsigned long : 17;
15146 #else
15147         unsigned long : 17;
15148         unsigned long CDSIG : 1;
15149         unsigned long CDRISE : 1;
15150         unsigned long CDFALL : 1;
15151         unsigned long : 6;
15152         unsigned long MCDRISE : 1;
15153         unsigned long MCDFALL : 1;
15154         unsigned long : 4;
15155 #endif
15156     } BIT;
15157     } CEDETECT;
15158     union {
15159         unsigned long LONG;
15160         struct {
15161
15162 #ifdef __RX_LITTLE_ENDIAN__
15163         unsigned long : 19;
15164         unsigned long CLKMAIN : 1;
15165         unsigned long : 1;
15166         unsigned long RESNOUT : 1;
15167         unsigned long : 10;
15168 #else
15169         unsigned long : 10;
15170         unsigned long RESNOUT : 1;
15171         unsigned long : 1;
15172         unsigned long CLKMAIN : 1;
15173         unsigned long : 19;
15174 #endif
15175     } BIT;
15176     } CEADDMODE;
15177     char        wk3[4];
15178     union {
15179         unsigned long LONG;
15180         struct {
15181
15182 #ifdef __RX_LITTLE_ENDIAN__
15183         unsigned long VERSION : 16;
15184         unsigned long : 15;
15185         unsigned long SWRST : 1;
15186 #else
15187         unsigned long SWRST : 1;
15188         unsigned long : 15;
15189         unsigned long VERSION : 16;
15190 #endif
15191     } BIT;
15192     } CEVERSION;
15193 } st_mmcif_t;
15194
15195 typedef struct st_mpc {
15196     union {
15197         unsigned char BYTE;
15198         struct {
15199

```

```
15200 #ifdef __RX_LITTLE_ENDIAN__
15201     unsigned char CS0E : 1;
15202     unsigned char CS1E : 1;
15203     unsigned char CS2E : 1;
15204     unsigned char CS3E : 1;
15205     unsigned char CS4E : 1;
15206     unsigned char CS5E : 1;
15207     unsigned char CS6E : 1;
15208     unsigned char CS7E : 1;
15209 #else
15210     unsigned char CS7E : 1;
15211     unsigned char CS6E : 1;
15212     unsigned char CS5E : 1;
15213     unsigned char CS4E : 1;
15214     unsigned char CS3E : 1;
15215     unsigned char CS2E : 1;
15216     unsigned char CS1E : 1;
15217     unsigned char CS0E : 1;
15218 #endif
15219 } BIT;
15220 } PFCSE;
15221 char      wk0[1];
15222 union {
15223     unsigned char BYTE;
15224     struct {
15225
15226 #ifdef __RX_LITTLE_ENDIAN__
15227     unsigned char CS0S : 1;
15228     unsigned char  : 1;
15229     unsigned char CS1S : 2;
15230     unsigned char CS2S : 2;
15231     unsigned char CS3S : 2;
15232 #else
15233     unsigned char CS3S : 2;
15234     unsigned char CS2S : 2;
15235     unsigned char CS1S : 2;
15236     unsigned char  : 1;
15237     unsigned char CS0S : 1;
15238 #endif
15239 } BIT;
15240 } PFCSS0;
15241 union {
15242     unsigned char BYTE;
15243     struct {
15244
15245 #ifdef __RX_LITTLE_ENDIAN__
15246     unsigned char CS4S : 2;
15247     unsigned char CS5S : 2;
15248     unsigned char CS6S : 2;
15249     unsigned char CS7S : 2;
15250 #else
15251     unsigned char CS7S : 2;
15252     unsigned char CS6S : 2;
15253     unsigned char CS5S : 2;
15254     unsigned char CS4S : 2;
15255 #endif
15256 } BIT;
15257 } PFCSS1;
15258 union {
15259     unsigned char BYTE;
15260     struct {
15261
15262 #ifdef __RX_LITTLE_ENDIAN__
15263     unsigned char A8E : 1;
15264     unsigned char A9E : 1;
15265     unsigned char A10E : 1;
15266     unsigned char A11E : 1;
15267     unsigned char A12E : 1;
15268     unsigned char A13E : 1;
15269     unsigned char A14E : 1;
15270     unsigned char A15E : 1;
15271 #else
15272     unsigned char A15E : 1;
15273     unsigned char A14E : 1;
15274     unsigned char A13E : 1;
15275     unsigned char A12E : 1;
15276     unsigned char A11E : 1;
15277     unsigned char A10E : 1;
15278     unsigned char A9E : 1;
15279     unsigned char A8E : 1;
15280 #endif
15281 } BIT;
15282 } PFAOE0;
15283 union {
15284     unsigned char BYTE;
15285     struct {
15286
```

```

15287 #ifdef __RX_LITTLE_ENDIAN__
15288     unsigned char A16E : 1;
15289     unsigned char A17E : 1;
15290     unsigned char A18E : 1;
15291     unsigned char A19E : 1;
15292     unsigned char A20E : 1;
15293     unsigned char A21E : 1;
15294     unsigned char A22E : 1;
15295     unsigned char A23E : 1;
15296 #else
15297     unsigned char A23E : 1;
15298     unsigned char A22E : 1;
15299     unsigned char A21E : 1;
15300     unsigned char A20E : 1;
15301     unsigned char A19E : 1;
15302     unsigned char A18E : 1;
15303     unsigned char A17E : 1;
15304     unsigned char A16E : 1;
15305 #endif
15306     } BIT;
15307     } PFAOE1;
15308     union {
15309         unsigned char BYTE;
15310         struct {
15311
15312 #ifdef __RX_LITTLE_ENDIAN__
15313         unsigned char ADRLE : 1;
15314         unsigned char ADRHMS : 1;
15315         unsigned char ADRHMS2 : 1;
15316         unsigned char BCLKO : 1;
15317         unsigned char DHE : 1;
15318         unsigned char DH32E : 1;
15319         unsigned char WR1BC1E : 1;
15320         unsigned char WR32BC32E : 1;
15321 #else
15322         unsigned char WR32BC32E : 1;
15323         unsigned char WR1BC1E : 1;
15324         unsigned char DH32E : 1;
15325         unsigned char DHE : 1;
15326         unsigned char BCLKO : 1;
15327         unsigned char ADRHMS2 : 1;
15328         unsigned char ADRHMS : 1;
15329         unsigned char ADRLE : 1;
15330 #endif
15331         } BIT;
15332         } PFBCR0;
15333         union {
15334             unsigned char BYTE;
15335             struct {
15336
15337 #ifdef __RX_LITTLE_ENDIAN__
15338             unsigned char WAITS : 2;
15339             unsigned char ALEOE : 1;
15340             unsigned char ALES : 1;
15341             unsigned char MDSDE : 1;
15342             unsigned char : 1;
15343             unsigned char DQM1E : 1;
15344             unsigned char SDCLKE : 1;
15345 #else
15346             unsigned char SDCLKE : 1;
15347             unsigned char DQM1E : 1;
15348             unsigned char : 1;
15349             unsigned char MDSDE : 1;
15350             unsigned char ALES : 1;
15351             unsigned char ALEOE : 1;
15352             unsigned char WAITS : 2;
15353 #endif
15354             } BIT;
15355             } PFBCR1;
15356             union {
15357                 unsigned char BYTE;
15358                 struct {
15359
15360 #ifdef __RX_LITTLE_ENDIAN__
15361                 unsigned char D0S : 2;
15362                 unsigned char D1S : 2;
15363                 unsigned char D2S : 2;
15364                 unsigned char D3S : 2;
15365 #else
15366                 unsigned char D3S : 2;
15367                 unsigned char D2S : 2;
15368                 unsigned char D1S : 2;
15369                 unsigned char D0S : 2;
15370 #endif
15371                 } BIT;
15372                 } PFBCR2;
15373             union {

```

```

15374     unsigned char BYTE;
15375     struct {
15376
15377 #ifdef __RX_LITTLE_ENDIAN__
15378     unsigned char DLHS : 1;
15379     unsigned char : 5;
15380     unsigned char SDCLKDRV : 1;
15381     unsigned char WAITS2 : 1;
15382 #else
15383     unsigned char WAITS2 : 1;
15384     unsigned char SDCLKDRV : 1;
15385     unsigned char : 5;
15386     unsigned char DLHS : 1;
15387 #endif
15388     } BIT;
15389     } PFBCR3;
15390     char      wk1[4];
15391     union {
15392     unsigned char BYTE;
15393     struct {
15394
15395 #ifdef __RX_LITTLE_ENDIAN__
15396     unsigned char : 4;
15397     unsigned char PHYMODE0 : 1;
15398     unsigned char PHYMODE1 : 1;
15399     unsigned char : 2;
15400 #else
15401     unsigned char : 2;
15402     unsigned char PHYMODE1 : 1;
15403     unsigned char PHYMODE0 : 1;
15404     unsigned char : 4;
15405 #endif
15406     } BIT;
15407     } PFENET;
15408     char      wk2[16];
15409     union {
15410     unsigned char BYTE;
15411     struct {
15412
15413 #ifdef __RX_LITTLE_ENDIAN__
15414     unsigned char : 6;
15415     unsigned char PFSWE : 1;
15416     unsigned char B0WI : 1;
15417 #else
15418     unsigned char B0WI : 1;
15419     unsigned char PFSWE : 1;
15420     unsigned char : 6;
15421 #endif
15422     } BIT;
15423     } PWPR;
15424     char      wk3[32];
15425     union {
15426     unsigned char BYTE;
15427     struct {
15428
15429 #ifdef __RX_LITTLE_ENDIAN__
15430     unsigned char PSEL : 6;
15431     unsigned char ISEL : 1;
15432     unsigned char ASEL : 1;
15433 #else
15434     unsigned char ASEL : 1;
15435     unsigned char ISEL : 1;
15436     unsigned char PSEL : 6;
15437 #endif
15438     } BIT;
15439     } P00PFS;
15440     union {
15441     unsigned char BYTE;
15442     struct {
15443
15444 #ifdef __RX_LITTLE_ENDIAN__
15445     unsigned char PSEL : 6;
15446     unsigned char ISEL : 1;
15447     unsigned char ASEL : 1;
15448 #else
15449     unsigned char ASEL : 1;
15450     unsigned char ISEL : 1;
15451     unsigned char PSEL : 6;
15452 #endif
15453     } BIT;
15454     } P01PFS;
15455     union {
15456     unsigned char BYTE;
15457     struct {
15458
15459 #ifdef __RX_LITTLE_ENDIAN__
15460     unsigned char PSEL : 6;

```

```
15461         unsigned char ISEL : 1;
15462         unsigned char ASEL : 1;
15463     #else
15464         unsigned char ASEL : 1;
15465         unsigned char ISEL : 1;
15466         unsigned char PSEL : 6;
15467     #endif
15468     } BIT;
15469     } P02PFS;
15470     union {
15471         unsigned char BYTE;
15472         struct {
15473
15474     #ifdef __RX_LITTLE_ENDIAN__
15475         unsigned char : 6;
15476         unsigned char ISEL : 1;
15477         unsigned char ASEL : 1;
15478     #else
15479         unsigned char ASEL : 1;
15480         unsigned char ISEL : 1;
15481         unsigned char : 6;
15482     #endif
15483     } BIT;
15484     } P03PFS;
15485     char          wk4[1];
15486     union {
15487         unsigned char BYTE;
15488         struct {
15489
15490     #ifdef __RX_LITTLE_ENDIAN__
15491         unsigned char : 6;
15492         unsigned char ISEL : 1;
15493         unsigned char ASEL : 1;
15494     #else
15495         unsigned char ASEL : 1;
15496         unsigned char ISEL : 1;
15497         unsigned char : 6;
15498     #endif
15499     } BIT;
15500     } P05PFS;
15501     char          wk5[1];
15502     union {
15503         unsigned char BYTE;
15504         struct {
15505
15506     #ifdef __RX_LITTLE_ENDIAN__
15507         unsigned char PSEL : 6;
15508         unsigned char ISEL : 1;
15509         unsigned char : 1;
15510     #else
15511         unsigned char : 1;
15512         unsigned char ISEL : 1;
15513         unsigned char PSEL : 6;
15514     #endif
15515     } BIT;
15516     } P07PFS;
15517     union {
15518         unsigned char BYTE;
15519         struct {
15520
15521     #ifdef __RX_LITTLE_ENDIAN__
15522         unsigned char PSEL : 6;
15523         unsigned char ISEL : 1;
15524         unsigned char : 1;
15525     #else
15526         unsigned char : 1;
15527         unsigned char ISEL : 1;
15528         unsigned char PSEL : 6;
15529     #endif
15530     } BIT;
15531     } P10PFS;
15532     union {
15533         unsigned char BYTE;
15534         struct {
15535
15536     #ifdef __RX_LITTLE_ENDIAN__
15537         unsigned char PSEL : 6;
15538         unsigned char ISEL : 1;
15539         unsigned char : 1;
15540     #else
15541         unsigned char : 1;
15542         unsigned char ISEL : 1;
15543         unsigned char PSEL : 6;
15544     #endif
15545     } BIT;
15546     } P11PFS;
15547     union {
```

```

15548 unsigned char BYTE;
15549 struct {
15550
15551 #ifdef __RX_LITTLE_ENDIAN__
15552 unsigned char PSEL : 6;
15553 unsigned char ISEL : 1;
15554 unsigned char : 1;
15555 #else
15556 unsigned char : 1;
15557 unsigned char ISEL : 1;
15558 unsigned char PSEL : 6;
15559 #endif
15560 } BIT;
15561 } P12PFS;
15562 union {
15563 unsigned char BYTE;
15564 struct {
15565
15566 #ifdef __RX_LITTLE_ENDIAN__
15567 unsigned char PSEL : 6;
15568 unsigned char ISEL : 1;
15569 unsigned char : 1;
15570 #else
15571 unsigned char : 1;
15572 unsigned char ISEL : 1;
15573 unsigned char PSEL : 6;
15574 #endif
15575 } BIT;
15576 } P13PFS;
15577 union {
15578 unsigned char BYTE;
15579 struct {
15580
15581 #ifdef __RX_LITTLE_ENDIAN__
15582 unsigned char PSEL : 6;
15583 unsigned char ISEL : 1;
15584 unsigned char : 1;
15585 #else
15586 unsigned char : 1;
15587 unsigned char ISEL : 1;
15588 unsigned char PSEL : 6;
15589 #endif
15590 } BIT;
15591 } P14PFS;
15592 union {
15593 unsigned char BYTE;
15594 struct {
15595
15596 #ifdef __RX_LITTLE_ENDIAN__
15597 unsigned char PSEL : 6;
15598 unsigned char ISEL : 1;
15599 unsigned char : 1;
15600 #else
15601 unsigned char : 1;
15602 unsigned char ISEL : 1;
15603 unsigned char PSEL : 6;
15604 #endif
15605 } BIT;
15606 } P15PFS;
15607 union {
15608 unsigned char BYTE;
15609 struct {
15610
15611 #ifdef __RX_LITTLE_ENDIAN__
15612 unsigned char PSEL : 6;
15613 unsigned char ISEL : 1;
15614 unsigned char : 1;
15615 #else
15616 unsigned char : 1;
15617 unsigned char ISEL : 1;
15618 unsigned char PSEL : 6;
15619 #endif
15620 } BIT;
15621 } P16PFS;
15622 union {
15623 unsigned char BYTE;
15624 struct {
15625
15626 #ifdef __RX_LITTLE_ENDIAN__
15627 unsigned char PSEL : 6;
15628 unsigned char ISEL : 1;
15629 unsigned char : 1;
15630 #else
15631 unsigned char : 1;
15632 unsigned char ISEL : 1;
15633 unsigned char PSEL : 6;
15634 #endif

```

```
15635     } BIT;
15636     } P17PFS;
15637     union {
15638         unsigned char BYTE;
15639         struct {
15640
15641 #ifdef __RX_LITTLE_ENDIAN__
15642         unsigned char PSEL : 6;
15643         unsigned char ISEL : 1;
15644         unsigned char : 1;
15645 #else
15646         unsigned char : 1;
15647         unsigned char ISEL : 1;
15648         unsigned char PSEL : 6;
15649 #endif
15650     } BIT;
15651     } P20PFS;
15652     union {
15653         unsigned char BYTE;
15654         struct {
15655
15656 #ifdef __RX_LITTLE_ENDIAN__
15657         unsigned char PSEL : 6;
15658         unsigned char ISEL : 1;
15659         unsigned char : 1;
15660 #else
15661         unsigned char : 1;
15662         unsigned char ISEL : 1;
15663         unsigned char PSEL : 6;
15664 #endif
15665     } BIT;
15666     } P21PFS;
15667     union {
15668         unsigned char BYTE;
15669         struct {
15670
15671 #ifdef __RX_LITTLE_ENDIAN__
15672         unsigned char PSEL : 6;
15673         unsigned char : 2;
15674 #else
15675         unsigned char : 2;
15676         unsigned char PSEL : 6;
15677 #endif
15678     } BIT;
15679     } P22PFS;
15680     union {
15681         unsigned char BYTE;
15682         struct {
15683
15684 #ifdef __RX_LITTLE_ENDIAN__
15685         unsigned char PSEL : 6;
15686         unsigned char : 2;
15687 #else
15688         unsigned char : 2;
15689         unsigned char PSEL : 6;
15690 #endif
15691     } BIT;
15692     } P23PFS;
15693     union {
15694         unsigned char BYTE;
15695         struct {
15696
15697 #ifdef __RX_LITTLE_ENDIAN__
15698         unsigned char PSEL : 6;
15699         unsigned char : 2;
15700 #else
15701         unsigned char : 2;
15702         unsigned char PSEL : 6;
15703 #endif
15704     } BIT;
15705     } P24PFS;
15706     union {
15707         unsigned char BYTE;
15708         struct {
15709
15710 #ifdef __RX_LITTLE_ENDIAN__
15711         unsigned char PSEL : 6;
15712         unsigned char : 2;
15713 #else
15714         unsigned char : 2;
15715         unsigned char PSEL : 6;
15716 #endif
15717     } BIT;
15718     } P25PFS;
15719     union {
15720         unsigned char BYTE;
15721         struct {
```

```
15722
15723 #ifdef __RX_LITTLE_ENDIAN__
15724     unsigned char PSEL : 6;
15725     unsigned char : 2;
15726 #else
15727     unsigned char : 2;
15728     unsigned char PSEL : 6;
15729 #endif
15730 } BIT;
15731 } P26PFS;
15732 union {
15733     unsigned char BYTE;
15734     struct {
15735
15736 #ifdef __RX_LITTLE_ENDIAN__
15737     unsigned char PSEL : 6;
15738     unsigned char : 2;
15739 #else
15740     unsigned char : 2;
15741     unsigned char PSEL : 6;
15742 #endif
15743 } BIT;
15744 } P27PFS;
15745 union {
15746     unsigned char BYTE;
15747     struct {
15748
15749 #ifdef __RX_LITTLE_ENDIAN__
15750     unsigned char PSEL : 6;
15751     unsigned char ISEL : 1;
15752     unsigned char : 1;
15753 #else
15754     unsigned char : 1;
15755     unsigned char ISEL : 1;
15756     unsigned char PSEL : 6;
15757 #endif
15758 } BIT;
15759 } P30PFS;
15760 union {
15761     unsigned char BYTE;
15762     struct {
15763
15764 #ifdef __RX_LITTLE_ENDIAN__
15765     unsigned char PSEL : 6;
15766     unsigned char ISEL : 1;
15767     unsigned char : 1;
15768 #else
15769     unsigned char : 1;
15770     unsigned char ISEL : 1;
15771     unsigned char PSEL : 6;
15772 #endif
15773 } BIT;
15774 } P31PFS;
15775 union {
15776     unsigned char BYTE;
15777     struct {
15778
15779 #ifdef __RX_LITTLE_ENDIAN__
15780     unsigned char PSEL : 6;
15781     unsigned char ISEL : 1;
15782     unsigned char : 1;
15783 #else
15784     unsigned char : 1;
15785     unsigned char ISEL : 1;
15786     unsigned char PSEL : 6;
15787 #endif
15788 } BIT;
15789 } P32PFS;
15790 union {
15791     unsigned char BYTE;
15792     struct {
15793
15794 #ifdef __RX_LITTLE_ENDIAN__
15795     unsigned char PSEL : 6;
15796     unsigned char ISEL : 1;
15797     unsigned char : 1;
15798 #else
15799     unsigned char : 1;
15800     unsigned char ISEL : 1;
15801     unsigned char PSEL : 6;
15802 #endif
15803 } BIT;
15804 } P33PFS;
15805 union {
15806     unsigned char BYTE;
15807     struct {
15808
```

```
15809 #ifdef __RX_LITTLE_ENDIAN__
15810     unsigned char PSEL : 6;
15811     unsigned char ISEL : 1;
15812     unsigned char : 1;
15813 #else
15814     unsigned char : 1;
15815     unsigned char ISEL : 1;
15816     unsigned char PSEL : 6;
15817 #endif
15818     } BIT;
15819     } P34PFS;
15820     char          wk6[3];
15821     union {
15822         unsigned char BYTE;
15823         struct {
15824
15825 #ifdef __RX_LITTLE_ENDIAN__
15826         unsigned char : 6;
15827         unsigned char ISEL : 1;
15828         unsigned char ASEL : 1;
15829 #else
15830         unsigned char ASEL : 1;
15831         unsigned char ISEL : 1;
15832         unsigned char : 6;
15833 #endif
15834         } BIT;
15835         } P40PFS;
15836         union {
15837             unsigned char BYTE;
15838             struct {
15839
15840 #ifdef __RX_LITTLE_ENDIAN__
15841             unsigned char : 6;
15842             unsigned char ISEL : 1;
15843             unsigned char ASEL : 1;
15844 #else
15845             unsigned char ASEL : 1;
15846             unsigned char ISEL : 1;
15847             unsigned char : 6;
15848 #endif
15849             } BIT;
15850             } P41PFS;
15851             union {
15852                 unsigned char BYTE;
15853                 struct {
15854
15855 #ifdef __RX_LITTLE_ENDIAN__
15856                 unsigned char : 6;
15857                 unsigned char ISEL : 1;
15858                 unsigned char ASEL : 1;
15859 #else
15860                 unsigned char ASEL : 1;
15861                 unsigned char ISEL : 1;
15862                 unsigned char : 6;
15863 #endif
15864                 } BIT;
15865                 } P42PFS;
15866                 union {
15867                     unsigned char BYTE;
15868                     struct {
15869
15870 #ifdef __RX_LITTLE_ENDIAN__
15871                     unsigned char : 6;
15872                     unsigned char ISEL : 1;
15873                     unsigned char ASEL : 1;
15874 #else
15875                     unsigned char ASEL : 1;
15876                     unsigned char ISEL : 1;
15877                     unsigned char : 6;
15878 #endif
15879                     } BIT;
15880                     } P43PFS;
15881                     union {
15882                         unsigned char BYTE;
15883                         struct {
15884
15885 #ifdef __RX_LITTLE_ENDIAN__
15886                         unsigned char : 6;
15887                         unsigned char ISEL : 1;
15888                         unsigned char ASEL : 1;
15889 #else
15890                         unsigned char ASEL : 1;
15891                         unsigned char ISEL : 1;
15892                         unsigned char : 6;
15893 #endif
15894                         } BIT;
15895                         } P44PFS;
```

```
15896     union {
15897         unsigned char BYTE;
15898     struct {
15899
15900 #ifdef __RX_LITTLE_ENDIAN__
15901         unsigned char : 6;
15902         unsigned char ISEL : 1;
15903         unsigned char ASEL : 1;
15904 #else
15905         unsigned char ASEL : 1;
15906         unsigned char ISEL : 1;
15907         unsigned char : 6;
15908 #endif
15909     } BIT;
15910     } P45PFS;
15911     union {
15912         unsigned char BYTE;
15913     struct {
15914
15915 #ifdef __RX_LITTLE_ENDIAN__
15916         unsigned char : 6;
15917         unsigned char ISEL : 1;
15918         unsigned char ASEL : 1;
15919 #else
15920         unsigned char ASEL : 1;
15921         unsigned char ISEL : 1;
15922         unsigned char : 6;
15923 #endif
15924     } BIT;
15925     } P46PFS;
15926     union {
15927         unsigned char BYTE;
15928     struct {
15929
15930 #ifdef __RX_LITTLE_ENDIAN__
15931         unsigned char : 6;
15932         unsigned char ISEL : 1;
15933         unsigned char ASEL : 1;
15934 #else
15935         unsigned char ASEL : 1;
15936         unsigned char ISEL : 1;
15937         unsigned char : 6;
15938 #endif
15939     } BIT;
15940     } P47PFS;
15941     union {
15942         unsigned char BYTE;
15943     struct {
15944
15945 #ifdef __RX_LITTLE_ENDIAN__
15946         unsigned char PSEL : 6;
15947         unsigned char : 2;
15948 #else
15949         unsigned char : 2;
15950         unsigned char PSEL : 6;
15951 #endif
15952     } BIT;
15953     } P50PFS;
15954     union {
15955         unsigned char BYTE;
15956     struct {
15957
15958 #ifdef __RX_LITTLE_ENDIAN__
15959         unsigned char PSEL : 6;
15960         unsigned char : 2;
15961 #else
15962         unsigned char : 2;
15963         unsigned char PSEL : 6;
15964 #endif
15965     } BIT;
15966     } P51PFS;
15967     union {
15968         unsigned char BYTE;
15969     struct {
15970
15971 #ifdef __RX_LITTLE_ENDIAN__
15972         unsigned char PSEL : 6;
15973         unsigned char : 2;
15974 #else
15975         unsigned char : 2;
15976         unsigned char PSEL : 6;
15977 #endif
15978     } BIT;
15979     } P52PFS;
15980     char          wk7[1];
15981     union {
15982         unsigned char BYTE;
```

```
15983     struct {
15984
15985 #ifdef __RX_LITTLE_ENDIAN__
15986     unsigned char PSEL : 6;
15987     unsigned char  : 2;
15988 #else
15989     unsigned char  : 2;
15990     unsigned char PSEL : 6;
15991 #endif
15992     } BIT;
15993     } P54PFS;
15994     union {
15995     unsigned char BYTE;
15996     struct {
15997
15998 #ifdef __RX_LITTLE_ENDIAN__
15999     unsigned char PSEL : 6;
16000     unsigned char ISEL : 1;
16001     unsigned char  : 1;
16002 #else
16003     unsigned char  : 1;
16004     unsigned char ISEL : 1;
16005     unsigned char PSEL : 6;
16006 #endif
16007     } BIT;
16008     } P55PFS;
16009     union {
16010     unsigned char BYTE;
16011     struct {
16012
16013 #ifdef __RX_LITTLE_ENDIAN__
16014     unsigned char PSEL : 6;
16015     unsigned char  : 2;
16016 #else
16017     unsigned char  : 2;
16018     unsigned char PSEL : 6;
16019 #endif
16020     } BIT;
16021     } P56PFS;
16022     union {
16023     unsigned char BYTE;
16024     struct {
16025
16026 #ifdef __RX_LITTLE_ENDIAN__
16027     unsigned char PSEL : 6;
16028     unsigned char  : 2;
16029 #else
16030     unsigned char  : 2;
16031     unsigned char PSEL : 6;
16032 #endif
16033     } BIT;
16034     } P57PFS;
16035     union {
16036     unsigned char BYTE;
16037     struct {
16038
16039 #ifdef __RX_LITTLE_ENDIAN__
16040     unsigned char PSEL : 6;
16041     unsigned char  : 2;
16042 #else
16043     unsigned char  : 2;
16044     unsigned char PSEL : 6;
16045 #endif
16046     } BIT;
16047     } P60PFS;
16048     union {
16049     unsigned char BYTE;
16050     struct {
16051
16052 #ifdef __RX_LITTLE_ENDIAN__
16053     unsigned char PSEL : 6;
16054     unsigned char  : 2;
16055 #else
16056     unsigned char  : 2;
16057     unsigned char PSEL : 6;
16058 #endif
16059     } BIT;
16060     } P61PFS;
16061     union {
16062     unsigned char BYTE;
16063     struct {
16064
16065 #ifdef __RX_LITTLE_ENDIAN__
16066     unsigned char PSEL : 6;
16067     unsigned char  : 2;
16068 #else
16069     unsigned char  : 2;
```

```
16070         unsigned char PSEL : 6;
16071 #endif
16072     } BIT;
16073     } P62PFS;
16074     union {
16075         unsigned char BYTE;
16076         struct {
16077
16078 #ifdef __RX_LITTLE_ENDIAN__
16079         unsigned char PSEL : 6;
16080         unsigned char : 2;
16081 #else
16082         unsigned char : 2;
16083         unsigned char PSEL : 6;
16084 #endif
16085     } BIT;
16086     } P63PFS;
16087     union {
16088         unsigned char BYTE;
16089         struct {
16090
16091 #ifdef __RX_LITTLE_ENDIAN__
16092         unsigned char PSEL : 6;
16093         unsigned char : 2;
16094 #else
16095         unsigned char : 2;
16096         unsigned char PSEL : 6;
16097 #endif
16098     } BIT;
16099     } P64PFS;
16100     char          wk8[1];
16101     union {
16102         unsigned char BYTE;
16103         struct {
16104
16105 #ifdef __RX_LITTLE_ENDIAN__
16106         unsigned char PSEL : 6;
16107         unsigned char : 2;
16108 #else
16109         unsigned char : 2;
16110         unsigned char PSEL : 6;
16111 #endif
16112     } BIT;
16113     } P66PFS;
16114     union {
16115         unsigned char BYTE;
16116         struct {
16117
16118 #ifdef __RX_LITTLE_ENDIAN__
16119         unsigned char PSEL : 6;
16120         unsigned char ISEL : 1;
16121         unsigned char : 1;
16122 #else
16123         unsigned char : 1;
16124         unsigned char ISEL : 1;
16125         unsigned char PSEL : 6;
16126 #endif
16127     } BIT;
16128     } P67PFS;
16129     char          wk9[1];
16130     union {
16131         unsigned char BYTE;
16132         struct {
16133
16134 #ifdef __RX_LITTLE_ENDIAN__
16135         unsigned char PSEL : 6;
16136         unsigned char : 2;
16137 #else
16138         unsigned char : 2;
16139         unsigned char PSEL : 6;
16140 #endif
16141     } BIT;
16142     } P71PFS;
16143     union {
16144         unsigned char BYTE;
16145         struct {
16146
16147 #ifdef __RX_LITTLE_ENDIAN__
16148         unsigned char PSEL : 6;
16149         unsigned char : 2;
16150 #else
16151         unsigned char : 2;
16152         unsigned char PSEL : 6;
16153 #endif
16154     } BIT;
16155     } P72PFS;
16156     union {
```

```
16157     unsigned char BYTE;
16158     struct {
16159
16160 #ifdef __RX_LITTLE_ENDIAN__
16161     unsigned char PSEL : 6;
16162     unsigned char : 2;
16163 #else
16164     unsigned char : 2;
16165     unsigned char PSEL : 6;
16166 #endif
16167     } BIT;
16168     } P73PFS;
16169     union {
16170     unsigned char BYTE;
16171     struct {
16172
16173 #ifdef __RX_LITTLE_ENDIAN__
16174     unsigned char PSEL : 6;
16175     unsigned char : 2;
16176 #else
16177     unsigned char : 2;
16178     unsigned char PSEL : 6;
16179 #endif
16180     } BIT;
16181     } P74PFS;
16182     union {
16183     unsigned char BYTE;
16184     struct {
16185
16186 #ifdef __RX_LITTLE_ENDIAN__
16187     unsigned char PSEL : 6;
16188     unsigned char : 2;
16189 #else
16190     unsigned char : 2;
16191     unsigned char PSEL : 6;
16192 #endif
16193     } BIT;
16194     } P75PFS;
16195     union {
16196     unsigned char BYTE;
16197     struct {
16198
16199 #ifdef __RX_LITTLE_ENDIAN__
16200     unsigned char PSEL : 6;
16201     unsigned char : 2;
16202 #else
16203     unsigned char : 2;
16204     unsigned char PSEL : 6;
16205 #endif
16206     } BIT;
16207     } P76PFS;
16208     union {
16209     unsigned char BYTE;
16210     struct {
16211
16212 #ifdef __RX_LITTLE_ENDIAN__
16213     unsigned char PSEL : 6;
16214     unsigned char : 2;
16215 #else
16216     unsigned char : 2;
16217     unsigned char PSEL : 6;
16218 #endif
16219     } BIT;
16220     } P77PFS;
16221     union {
16222     unsigned char BYTE;
16223     struct {
16224
16225 #ifdef __RX_LITTLE_ENDIAN__
16226     unsigned char PSEL : 6;
16227     unsigned char : 2;
16228 #else
16229     unsigned char : 2;
16230     unsigned char PSEL : 6;
16231 #endif
16232     } BIT;
16233     } P80PFS;
16234     union {
16235     unsigned char BYTE;
16236     struct {
16237
16238 #ifdef __RX_LITTLE_ENDIAN__
16239     unsigned char PSEL : 6;
16240     unsigned char : 2;
16241 #else
16242     unsigned char : 2;
16243     unsigned char PSEL : 6;
```

```
16244 #endif
16245     } BIT;
16246     } P81PFS;
16247     union {
16248         unsigned char BYTE;
16249         struct {
16250
16251 #ifdef __RX_LITTLE_ENDIAN__
16252         unsigned char PSEL : 6;
16253         unsigned char : 2;
16254 #else
16255         unsigned char : 2;
16256         unsigned char PSEL : 6;
16257 #endif
16258     } BIT;
16259     } P82PFS;
16260     union {
16261         unsigned char BYTE;
16262         struct {
16263
16264 #ifdef __RX_LITTLE_ENDIAN__
16265         unsigned char PSEL : 6;
16266         unsigned char : 2;
16267 #else
16268         unsigned char : 2;
16269         unsigned char PSEL : 6;
16270 #endif
16271     } BIT;
16272     } P83PFS;
16273     union {
16274         unsigned char BYTE;
16275         struct {
16276
16277 #ifdef __RX_LITTLE_ENDIAN__
16278         unsigned char PSEL : 6;
16279         unsigned char : 2;
16280 #else
16281         unsigned char : 2;
16282         unsigned char PSEL : 6;
16283 #endif
16284     } BIT;
16285     } P84PFS;
16286     union {
16287         unsigned char BYTE;
16288         struct {
16289
16290 #ifdef __RX_LITTLE_ENDIAN__
16291         unsigned char PSEL : 6;
16292         unsigned char : 2;
16293 #else
16294         unsigned char : 2;
16295         unsigned char PSEL : 6;
16296 #endif
16297     } BIT;
16298     } P85PFS;
16299     union {
16300         unsigned char BYTE;
16301         struct {
16302
16303 #ifdef __RX_LITTLE_ENDIAN__
16304         unsigned char PSEL : 6;
16305         unsigned char : 2;
16306 #else
16307         unsigned char : 2;
16308         unsigned char PSEL : 6;
16309 #endif
16310     } BIT;
16311     } P86PFS;
16312     union {
16313         unsigned char BYTE;
16314         struct {
16315
16316 #ifdef __RX_LITTLE_ENDIAN__
16317         unsigned char PSEL : 6;
16318         unsigned char : 2;
16319 #else
16320         unsigned char : 2;
16321         unsigned char PSEL : 6;
16322 #endif
16323     } BIT;
16324     } P87PFS;
16325     union {
16326         unsigned char BYTE;
16327         struct {
16328
16329 #ifdef __RX_LITTLE_ENDIAN__
16330         unsigned char PSEL : 6;
```

```
16331         unsigned char : 1;
16332         unsigned char ASEL : 1;
16333     #else
16334         unsigned char ASEL : 1;
16335         unsigned char : 1;
16336         unsigned char PSEL : 6;
16337     #endif
16338     } BIT;
16339     } P90PFS;
16340     union {
16341         unsigned char BYTE;
16342         struct {
16343
16344     #ifdef __RX_LITTLE_ENDIAN__
16345         unsigned char PSEL : 6;
16346         unsigned char : 1;
16347         unsigned char ASEL : 1;
16348     #else
16349         unsigned char ASEL : 1;
16350         unsigned char : 1;
16351         unsigned char PSEL : 6;
16352     #endif
16353     } BIT;
16354     } P91PFS;
16355     union {
16356         unsigned char BYTE;
16357         struct {
16358
16359     #ifdef __RX_LITTLE_ENDIAN__
16360         unsigned char PSEL : 6;
16361         unsigned char : 1;
16362         unsigned char ASEL : 1;
16363     #else
16364         unsigned char ASEL : 1;
16365         unsigned char : 1;
16366         unsigned char PSEL : 6;
16367     #endif
16368     } BIT;
16369     } P92PFS;
16370     union {
16371         unsigned char BYTE;
16372         struct {
16373
16374     #ifdef __RX_LITTLE_ENDIAN__
16375         unsigned char PSEL : 6;
16376         unsigned char : 1;
16377         unsigned char ASEL : 1;
16378     #else
16379         unsigned char ASEL : 1;
16380         unsigned char : 1;
16381         unsigned char PSEL : 6;
16382     #endif
16383     } BIT;
16384     } P93PFS;
16385     union {
16386         unsigned char BYTE;
16387         struct {
16388
16389     #ifdef __RX_LITTLE_ENDIAN__
16390         unsigned char PSEL : 6;
16391         unsigned char : 2;
16392     #else
16393         unsigned char : 2;
16394         unsigned char PSEL : 6;
16395     #endif
16396     } BIT;
16397     } P94PFS;
16398     union {
16399         unsigned char BYTE;
16400         struct {
16401
16402     #ifdef __RX_LITTLE_ENDIAN__
16403         unsigned char PSEL : 6;
16404         unsigned char : 2;
16405     #else
16406         unsigned char : 2;
16407         unsigned char PSEL : 6;
16408     #endif
16409     } BIT;
16410     } P95PFS;
16411     union {
16412         unsigned char BYTE;
16413         struct {
16414
16415     #ifdef __RX_LITTLE_ENDIAN__
16416         unsigned char PSEL : 6;
16417         unsigned char : 2;
```

```
16418 #else
16419     unsigned char : 2;
16420     unsigned char PSEL : 6;
16421 #endif
16422 } BIT;
16423 } P96PFS;
16424 union {
16425     unsigned char BYTE;
16426     struct {
16427
16428 #ifdef __RX_LITTLE_ENDIAN__
16429     unsigned char PSEL : 6;
16430     unsigned char : 2;
16431 #else
16432     unsigned char : 2;
16433     unsigned char PSEL : 6;
16434 #endif
16435 } BIT;
16436 } P97PFS;
16437 union {
16438     unsigned char BYTE;
16439     struct {
16440
16441 #ifdef __RX_LITTLE_ENDIAN__
16442     unsigned char PSEL : 6;
16443     unsigned char : 2;
16444 #else
16445     unsigned char : 2;
16446     unsigned char PSEL : 6;
16447 #endif
16448 } BIT;
16449 } PA0PFS;
16450 union {
16451     unsigned char BYTE;
16452     struct {
16453
16454 #ifdef __RX_LITTLE_ENDIAN__
16455     unsigned char PSEL : 6;
16456     unsigned char ISEL : 1;
16457     unsigned char : 1;
16458 #else
16459     unsigned char : 1;
16460     unsigned char ISEL : 1;
16461     unsigned char PSEL : 6;
16462 #endif
16463 } BIT;
16464 } PA1PFS;
16465 union {
16466     unsigned char BYTE;
16467     struct {
16468
16469 #ifdef __RX_LITTLE_ENDIAN__
16470     unsigned char PSEL : 6;
16471     unsigned char : 2;
16472 #else
16473     unsigned char : 2;
16474     unsigned char PSEL : 6;
16475 #endif
16476 } BIT;
16477 } PA2PFS;
16478 union {
16479     unsigned char BYTE;
16480     struct {
16481
16482 #ifdef __RX_LITTLE_ENDIAN__
16483     unsigned char PSEL : 6;
16484     unsigned char ISEL : 1;
16485     unsigned char : 1;
16486 #else
16487     unsigned char : 1;
16488     unsigned char ISEL : 1;
16489     unsigned char PSEL : 6;
16490 #endif
16491 } BIT;
16492 } PA3PFS;
16493 union {
16494     unsigned char BYTE;
16495     struct {
16496
16497 #ifdef __RX_LITTLE_ENDIAN__
16498     unsigned char PSEL : 6;
16499     unsigned char ISEL : 1;
16500     unsigned char : 1;
16501 #else
16502     unsigned char : 1;
16503     unsigned char ISEL : 1;
16504     unsigned char PSEL : 6;
```

```
16505 #endif
16506     } BIT;
16507     } PA4PFS;
16508     union {
16509         unsigned char BYTE;
16510         struct {
16511
16512 #ifdef __RX_LITTLE_ENDIAN__
16513         unsigned char PSEL : 6;
16514         unsigned char : 2;
16515 #else
16516         unsigned char : 2;
16517         unsigned char PSEL : 6;
16518 #endif
16519     } BIT;
16520     } PA5PFS;
16521     union {
16522         unsigned char BYTE;
16523         struct {
16524
16525 #ifdef __RX_LITTLE_ENDIAN__
16526         unsigned char PSEL : 6;
16527         unsigned char : 2;
16528 #else
16529         unsigned char : 2;
16530         unsigned char PSEL : 6;
16531 #endif
16532     } BIT;
16533     } PA6PFS;
16534     union {
16535         unsigned char BYTE;
16536         struct {
16537
16538 #ifdef __RX_LITTLE_ENDIAN__
16539         unsigned char PSEL : 6;
16540         unsigned char : 2;
16541 #else
16542         unsigned char : 2;
16543         unsigned char PSEL : 6;
16544 #endif
16545     } BIT;
16546     } PA7PFS;
16547     union {
16548         unsigned char BYTE;
16549         struct {
16550
16551 #ifdef __RX_LITTLE_ENDIAN__
16552         unsigned char PSEL : 6;
16553         unsigned char ISEL : 1;
16554         unsigned char : 1;
16555 #else
16556         unsigned char : 1;
16557         unsigned char ISEL : 1;
16558         unsigned char PSEL : 6;
16559 #endif
16560     } BIT;
16561     } PB0PFS;
16562     union {
16563         unsigned char BYTE;
16564         struct {
16565
16566 #ifdef __RX_LITTLE_ENDIAN__
16567         unsigned char PSEL : 6;
16568         unsigned char ISEL : 1;
16569         unsigned char : 1;
16570 #else
16571         unsigned char : 1;
16572         unsigned char ISEL : 1;
16573         unsigned char PSEL : 6;
16574 #endif
16575     } BIT;
16576     } PB1PFS;
16577     union {
16578         unsigned char BYTE;
16579         struct {
16580
16581 #ifdef __RX_LITTLE_ENDIAN__
16582         unsigned char PSEL : 6;
16583         unsigned char : 2;
16584 #else
16585         unsigned char : 2;
16586         unsigned char PSEL : 6;
16587 #endif
16588     } BIT;
16589     } PB2PFS;
16590     union {
16591         unsigned char BYTE;
```

```
16592     struct {
16593
16594 #ifdef __RX_LITTLE_ENDIAN__
16595     unsigned char PSEL : 6;
16596     unsigned char : 2;
16597 #else
16598     unsigned char : 2;
16599     unsigned char PSEL : 6;
16600 #endif
16601     } BIT;
16602     } PB3PFS;
16603     union {
16604     unsigned char BYTE;
16605     struct {
16606
16607 #ifdef __RX_LITTLE_ENDIAN__
16608     unsigned char PSEL : 6;
16609     unsigned char : 2;
16610 #else
16611     unsigned char : 2;
16612     unsigned char PSEL : 6;
16613 #endif
16614     } BIT;
16615     } PB4PFS;
16616     union {
16617     unsigned char BYTE;
16618     struct {
16619
16620 #ifdef __RX_LITTLE_ENDIAN__
16621     unsigned char PSEL : 6;
16622     unsigned char : 2;
16623 #else
16624     unsigned char : 2;
16625     unsigned char PSEL : 6;
16626 #endif
16627     } BIT;
16628     } PB5PFS;
16629     union {
16630     unsigned char BYTE;
16631     struct {
16632
16633 #ifdef __RX_LITTLE_ENDIAN__
16634     unsigned char PSEL : 6;
16635     unsigned char : 2;
16636 #else
16637     unsigned char : 2;
16638     unsigned char PSEL : 6;
16639 #endif
16640     } BIT;
16641     } PB6PFS;
16642     union {
16643     unsigned char BYTE;
16644     struct {
16645
16646 #ifdef __RX_LITTLE_ENDIAN__
16647     unsigned char PSEL : 6;
16648     unsigned char : 2;
16649 #else
16650     unsigned char : 2;
16651     unsigned char PSEL : 6;
16652 #endif
16653     } BIT;
16654     } PB7PFS;
16655     union {
16656     unsigned char BYTE;
16657     struct {
16658
16659 #ifdef __RX_LITTLE_ENDIAN__
16660     unsigned char PSEL : 6;
16661     unsigned char ISEL : 1;
16662     unsigned char : 1;
16663 #else
16664     unsigned char : 1;
16665     unsigned char ISEL : 1;
16666     unsigned char PSEL : 6;
16667 #endif
16668     } BIT;
16669     } PC0PFS;
16670     union {
16671     unsigned char BYTE;
16672     struct {
16673
16674 #ifdef __RX_LITTLE_ENDIAN__
16675     unsigned char PSEL : 6;
16676     unsigned char ISEL : 1;
16677     unsigned char : 1;
16678 #else
```

```

16679         unsigned char : 1;
16680         unsigned char ISEL : 1;
16681         unsigned char PSEL : 6;
16682     #endif
16683     } BIT;
16684     } PC1PFS;
16685     union {
16686         unsigned char BYTE;
16687         struct {
16688
16689     #ifdef __RX_LITTLE_ENDIAN__
16690         unsigned char PSEL : 6;
16691         unsigned char : 2;
16692     #else
16693         unsigned char : 2;
16694         unsigned char PSEL : 6;
16695     #endif
16696     } BIT;
16697     } PC2PFS;
16698     union {
16699         unsigned char BYTE;
16700         struct {
16701
16702     #ifdef __RX_LITTLE_ENDIAN__
16703         unsigned char PSEL : 6;
16704         unsigned char : 2;
16705     #else
16706         unsigned char : 2;
16707         unsigned char PSEL : 6;
16708     #endif
16709     } BIT;
16710     } PC3PFS;
16711     union {
16712         unsigned char BYTE;
16713         struct {
16714
16715     #ifdef __RX_LITTLE_ENDIAN__
16716         unsigned char PSEL : 6;
16717         unsigned char : 2;
16718     #else
16719         unsigned char : 2;
16720         unsigned char PSEL : 6;
16721     #endif
16722     } BIT;
16723     } PC4PFS;
16724     union {
16725         unsigned char BYTE;
16726         struct {
16727
16728     #ifdef __RX_LITTLE_ENDIAN__
16729         unsigned char PSEL : 6;
16730         unsigned char : 2;
16731     #else
16732         unsigned char : 2;
16733         unsigned char PSEL : 6;
16734     #endif
16735     } BIT;
16736     } PC5PFS;
16737     union {
16738         unsigned char BYTE;
16739         struct {
16740
16741     #ifdef __RX_LITTLE_ENDIAN__
16742         unsigned char PSEL : 6;
16743         unsigned char ISEL : 1;
16744         unsigned char : 1;
16745     #else
16746         unsigned char : 1;
16747         unsigned char ISEL : 1;
16748         unsigned char PSEL : 6;
16749     #endif
16750     } BIT;
16751     } PC6PFS;
16752     union {
16753         unsigned char BYTE;
16754         struct {
16755
16756     #ifdef __RX_LITTLE_ENDIAN__
16757         unsigned char PSEL : 6;
16758         unsigned char ISEL : 1;
16759         unsigned char : 1;
16760     #else
16761         unsigned char : 1;
16762         unsigned char ISEL : 1;
16763         unsigned char PSEL : 6;
16764     #endif
16765     } BIT;

```

```

16766     } PC7PFS;
16767     union {
16768         unsigned char BYTE;
16769         struct {
16770
16771 #ifdef __RX_LITTLE_ENDIAN__
16772         unsigned char PSEL : 6;
16773         unsigned char ISEL : 1;
16774         unsigned char ASEL : 1;
16775 #else
16776         unsigned char ASEL : 1;
16777         unsigned char ISEL : 1;
16778         unsigned char PSEL : 6;
16779 #endif
16780     } BIT;
16781     } PD0PFS;
16782     union {
16783         unsigned char BYTE;
16784         struct {
16785
16786 #ifdef __RX_LITTLE_ENDIAN__
16787         unsigned char PSEL : 6;
16788         unsigned char ISEL : 1;
16789         unsigned char ASEL : 1;
16790 #else
16791         unsigned char ASEL : 1;
16792         unsigned char ISEL : 1;
16793         unsigned char PSEL : 6;
16794 #endif
16795     } BIT;
16796     } PD1PFS;
16797     union {
16798         unsigned char BYTE;
16799         struct {
16800
16801 #ifdef __RX_LITTLE_ENDIAN__
16802         unsigned char PSEL : 6;
16803         unsigned char ISEL : 1;
16804         unsigned char ASEL : 1;
16805 #else
16806         unsigned char ASEL : 1;
16807         unsigned char ISEL : 1;
16808         unsigned char PSEL : 6;
16809 #endif
16810     } BIT;
16811     } PD2PFS;
16812     union {
16813         unsigned char BYTE;
16814         struct {
16815
16816 #ifdef __RX_LITTLE_ENDIAN__
16817         unsigned char PSEL : 6;
16818         unsigned char ISEL : 1;
16819         unsigned char ASEL : 1;
16820 #else
16821         unsigned char ASEL : 1;
16822         unsigned char ISEL : 1;
16823         unsigned char PSEL : 6;
16824 #endif
16825     } BIT;
16826     } PD3PFS;
16827     union {
16828         unsigned char BYTE;
16829         struct {
16830
16831 #ifdef __RX_LITTLE_ENDIAN__
16832         unsigned char PSEL : 6;
16833         unsigned char ISEL : 1;
16834         unsigned char ASEL : 1;
16835 #else
16836         unsigned char ASEL : 1;
16837         unsigned char ISEL : 1;
16838         unsigned char PSEL : 6;
16839 #endif
16840     } BIT;
16841     } PD4PFS;
16842     union {
16843         unsigned char BYTE;
16844         struct {
16845
16846 #ifdef __RX_LITTLE_ENDIAN__
16847         unsigned char PSEL : 6;
16848         unsigned char ISEL : 1;
16849         unsigned char ASEL : 1;
16850 #else
16851         unsigned char ASEL : 1;
16852         unsigned char ISEL : 1;

```

```
16853         unsigned char PSEL : 6;
16854     #endif
16855     } BIT;
16856     } PD5PFS;
16857     union {
16858         unsigned char BYTE;
16859         struct {
16860
16861     #ifdef __RX_LITTLE_ENDIAN__
16862         unsigned char PSEL : 6;
16863         unsigned char ISEL : 1;
16864         unsigned char ASEL : 1;
16865     #else
16866         unsigned char ASEL : 1;
16867         unsigned char ISEL : 1;
16868         unsigned char PSEL : 6;
16869     #endif
16870     } BIT;
16871     } PD6PFS;
16872     union {
16873         unsigned char BYTE;
16874         struct {
16875
16876     #ifdef __RX_LITTLE_ENDIAN__
16877         unsigned char PSEL : 6;
16878         unsigned char ISEL : 1;
16879         unsigned char ASEL : 1;
16880     #else
16881         unsigned char ASEL : 1;
16882         unsigned char ISEL : 1;
16883         unsigned char PSEL : 6;
16884     #endif
16885     } BIT;
16886     } PD7PFS;
16887     union {
16888         unsigned char BYTE;
16889         struct {
16890
16891     #ifdef __RX_LITTLE_ENDIAN__
16892         unsigned char PSEL : 6;
16893         unsigned char : 1;
16894         unsigned char ASEL : 1;
16895     #else
16896         unsigned char ASEL : 1;
16897         unsigned char : 1;
16898         unsigned char PSEL : 6;
16899     #endif
16900     } BIT;
16901     } PE0PFS;
16902     union {
16903         unsigned char BYTE;
16904         struct {
16905
16906     #ifdef __RX_LITTLE_ENDIAN__
16907         unsigned char PSEL : 6;
16908         unsigned char : 1;
16909         unsigned char ASEL : 1;
16910     #else
16911         unsigned char ASEL : 1;
16912         unsigned char : 1;
16913         unsigned char PSEL : 6;
16914     #endif
16915     } BIT;
16916     } PE1PFS;
16917     union {
16918         unsigned char BYTE;
16919         struct {
16920
16921     #ifdef __RX_LITTLE_ENDIAN__
16922         unsigned char PSEL : 6;
16923         unsigned char ISEL : 1;
16924         unsigned char ASEL : 1;
16925     #else
16926         unsigned char ASEL : 1;
16927         unsigned char ISEL : 1;
16928         unsigned char PSEL : 6;
16929     #endif
16930     } BIT;
16931     } PE2PFS;
16932     union {
16933         unsigned char BYTE;
16934         struct {
16935
16936     #ifdef __RX_LITTLE_ENDIAN__
16937         unsigned char PSEL : 6;
16938         unsigned char : 1;
16939         unsigned char ASEL : 1;
```

```
16940 #else
16941     unsigned char ASEL : 1;
16942     unsigned char : 1;
16943     unsigned char PSEL : 6;
16944 #endif
16945 } BIT;
16946 } PE3PFS;
16947 union {
16948     unsigned char BYTE;
16949     struct {
16950
16951 #ifdef __RX_LITTLE_ENDIAN__
16952     unsigned char PSEL : 6;
16953     unsigned char : 1;
16954     unsigned char ASEL : 1;
16955 #else
16956     unsigned char ASEL : 1;
16957     unsigned char : 1;
16958     unsigned char PSEL : 6;
16959 #endif
16960 } BIT;
16961 } PE4PFS;
16962 union {
16963     unsigned char BYTE;
16964     struct {
16965
16966 #ifdef __RX_LITTLE_ENDIAN__
16967     unsigned char PSEL : 6;
16968     unsigned char ISEL : 1;
16969     unsigned char ASEL : 1;
16970 #else
16971     unsigned char ASEL : 1;
16972     unsigned char ISEL : 1;
16973     unsigned char PSEL : 6;
16974 #endif
16975 } BIT;
16976 } PE5PFS;
16977 union {
16978     unsigned char BYTE;
16979     struct {
16980
16981 #ifdef __RX_LITTLE_ENDIAN__
16982     unsigned char PSEL : 6;
16983     unsigned char ISEL : 1;
16984     unsigned char ASEL : 1;
16985 #else
16986     unsigned char ASEL : 1;
16987     unsigned char ISEL : 1;
16988     unsigned char PSEL : 6;
16989 #endif
16990 } BIT;
16991 } PE6PFS;
16992 union {
16993     unsigned char BYTE;
16994     struct {
16995
16996 #ifdef __RX_LITTLE_ENDIAN__
16997     unsigned char PSEL : 6;
16998     unsigned char ISEL : 1;
16999     unsigned char ASEL : 1;
17000 #else
17001     unsigned char ASEL : 1;
17002     unsigned char ISEL : 1;
17003     unsigned char PSEL : 6;
17004 #endif
17005 } BIT;
17006 } PE7PFS;
17007 union {
17008     unsigned char BYTE;
17009     struct {
17010
17011 #ifdef __RX_LITTLE_ENDIAN__
17012     unsigned char PSEL : 6;
17013     unsigned char : 2;
17014 #else
17015     unsigned char : 2;
17016     unsigned char PSEL : 6;
17017 #endif
17018 } BIT;
17019 } PF0PFS;
17020 union {
17021     unsigned char BYTE;
17022     struct {
17023
17024 #ifdef __RX_LITTLE_ENDIAN__
17025     unsigned char PSEL : 6;
17026     unsigned char : 2;
```

```
17027 #else
17028     unsigned char : 2;
17029     unsigned char PSEL : 6;
17030 #endif
17031     } BIT;
17032     } PF1PFS;
17033     union {
17034         unsigned char BYTE;
17035         struct {
17036
17037 #ifdef __RX_LITTLE_ENDIAN__
17038         unsigned char PSEL : 6;
17039         unsigned char : 2;
17040 #else
17041         unsigned char : 2;
17042         unsigned char PSEL : 6;
17043 #endif
17044     } BIT;
17045     } PF2PFS;
17046     char          wk10[2];
17047     union {
17048         unsigned char BYTE;
17049         struct {
17050
17051 #ifdef __RX_LITTLE_ENDIAN__
17052         unsigned char PSEL : 6;
17053         unsigned char ISEL : 1;
17054         unsigned char : 1;
17055 #else
17056         unsigned char : 1;
17057         unsigned char ISEL : 1;
17058         unsigned char PSEL : 6;
17059 #endif
17060     } BIT;
17061     } PF5PFS;
17062     char          wk11[2];
17063     union {
17064         unsigned char BYTE;
17065         struct {
17066
17067 #ifdef __RX_LITTLE_ENDIAN__
17068         unsigned char PSEL : 6;
17069         unsigned char : 2;
17070 #else
17071         unsigned char : 2;
17072         unsigned char PSEL : 6;
17073 #endif
17074     } BIT;
17075     } PG0PFS;
17076     union {
17077         unsigned char BYTE;
17078         struct {
17079
17080 #ifdef __RX_LITTLE_ENDIAN__
17081         unsigned char PSEL : 6;
17082         unsigned char : 2;
17083 #else
17084         unsigned char : 2;
17085         unsigned char PSEL : 6;
17086 #endif
17087     } BIT;
17088     } PG1PFS;
17089     union {
17090         unsigned char BYTE;
17091         struct {
17092
17093 #ifdef __RX_LITTLE_ENDIAN__
17094         unsigned char PSEL : 6;
17095         unsigned char : 2;
17096 #else
17097         unsigned char : 2;
17098         unsigned char PSEL : 6;
17099 #endif
17100     } BIT;
17101     } PG2PFS;
17102     union {
17103         unsigned char BYTE;
17104         struct {
17105
17106 #ifdef __RX_LITTLE_ENDIAN__
17107         unsigned char PSEL : 6;
17108         unsigned char : 2;
17109 #else
17110         unsigned char : 2;
17111         unsigned char PSEL : 6;
17112 #endif
17113     } BIT;
```

```
17114     } PG3PFS;
17115     union {
17116         unsigned char BYTE;
17117         struct {
17118
17119 #ifdef __RX_LITTLE_ENDIAN__
17120         unsigned char PSEL : 6;
17121         unsigned char : 2;
17122 #else
17123         unsigned char : 2;
17124         unsigned char PSEL : 6;
17125 #endif
17126     } BIT;
17127     } PG4PFS;
17128     union {
17129         unsigned char BYTE;
17130         struct {
17131
17132 #ifdef __RX_LITTLE_ENDIAN__
17133         unsigned char PSEL : 6;
17134         unsigned char : 2;
17135 #else
17136         unsigned char : 2;
17137         unsigned char PSEL : 6;
17138 #endif
17139     } BIT;
17140     } PG5PFS;
17141     union {
17142         unsigned char BYTE;
17143         struct {
17144
17145 #ifdef __RX_LITTLE_ENDIAN__
17146         unsigned char PSEL : 6;
17147         unsigned char : 2;
17148 #else
17149         unsigned char : 2;
17150         unsigned char PSEL : 6;
17151 #endif
17152     } BIT;
17153     } PG6PFS;
17154     union {
17155         unsigned char BYTE;
17156         struct {
17157
17158 #ifdef __RX_LITTLE_ENDIAN__
17159         unsigned char PSEL : 6;
17160         unsigned char : 2;
17161 #else
17162         unsigned char : 2;
17163         unsigned char PSEL : 6;
17164 #endif
17165     } BIT;
17166     } PG7PFS;
17167     union {
17168         unsigned char BYTE;
17169         struct {
17170
17171 #ifdef __RX_LITTLE_ENDIAN__
17172         unsigned char PSEL : 6;
17173         unsigned char : 2;
17174 #else
17175         unsigned char : 2;
17176         unsigned char PSEL : 6;
17177 #endif
17178     } BIT;
17179     } PH0PFS;
17180     union {
17181         unsigned char BYTE;
17182         struct {
17183
17184 #ifdef __RX_LITTLE_ENDIAN__
17185         unsigned char PSEL : 6;
17186         unsigned char : 2;
17187 #else
17188         unsigned char : 2;
17189         unsigned char PSEL : 6;
17190 #endif
17191     } BIT;
17192     } PH1PFS;
17193     union {
17194         unsigned char BYTE;
17195         struct {
17196
17197 #ifdef __RX_LITTLE_ENDIAN__
17198         unsigned char PSEL : 6;
17199         unsigned char : 2;
17200 #else
```

```
17201         unsigned char : 2;
17202         unsigned char PSEL : 6;
17203 #endif
17204     } BIT;
17205     } PH2PFS;
17206     union {
17207         unsigned char BYTE;
17208         struct {
17209
17210 #ifdef __RX_LITTLE_ENDIAN__
17211         unsigned char PSEL : 6;
17212         unsigned char : 2;
17213 #else
17214         unsigned char : 2;
17215         unsigned char PSEL : 6;
17216 #endif
17217     } BIT;
17218     } PH3PFS;
17219     union {
17220         unsigned char BYTE;
17221         struct {
17222
17223 #ifdef __RX_LITTLE_ENDIAN__
17224         unsigned char PSEL : 6;
17225         unsigned char : 2;
17226 #else
17227         unsigned char : 2;
17228         unsigned char PSEL : 6;
17229 #endif
17230     } BIT;
17231     } PH4PFS;
17232     union {
17233         unsigned char BYTE;
17234         struct {
17235
17236 #ifdef __RX_LITTLE_ENDIAN__
17237         unsigned char PSEL : 6;
17238         unsigned char : 2;
17239 #else
17240         unsigned char : 2;
17241         unsigned char PSEL : 6;
17242 #endif
17243     } BIT;
17244     } PH5PFS;
17245     union {
17246         unsigned char BYTE;
17247         struct {
17248
17249 #ifdef __RX_LITTLE_ENDIAN__
17250         unsigned char PSEL : 6;
17251         unsigned char : 2;
17252 #else
17253         unsigned char : 2;
17254         unsigned char PSEL : 6;
17255 #endif
17256     } BIT;
17257     } PH6PFS;
17258     union {
17259         unsigned char BYTE;
17260         struct {
17261
17262 #ifdef __RX_LITTLE_ENDIAN__
17263         unsigned char PSEL : 6;
17264         unsigned char : 2;
17265 #else
17266         unsigned char : 2;
17267         unsigned char PSEL : 6;
17268 #endif
17269     } BIT;
17270     } PH7PFS;
17271     union {
17272         unsigned char BYTE;
17273         struct {
17274
17275 #ifdef __RX_LITTLE_ENDIAN__
17276         unsigned char PSEL : 6;
17277         unsigned char : 2;
17278 #else
17279         unsigned char : 2;
17280         unsigned char PSEL : 6;
17281 #endif
17282     } BIT;
17283     } PJ0PFS;
17284     union {
17285         unsigned char BYTE;
17286         struct {
17287
```

```
17288 #ifdef __RX_LITTLE_ENDIAN__
17289     unsigned char PSEL : 6;
17290     unsigned char : 2;
17291 #else
17292     unsigned char : 2;
17293     unsigned char PSEL : 6;
17294 #endif
17295     } BIT;
17296     } PJ1PFS;
17297     union {
17298         unsigned char BYTE;
17299         struct {
17300
17301 #ifdef __RX_LITTLE_ENDIAN__
17302         unsigned char PSEL : 6;
17303         unsigned char : 2;
17304 #else
17305         unsigned char : 2;
17306         unsigned char PSEL : 6;
17307 #endif
17308         } BIT;
17309         } PJ2PFS;
17310         union {
17311             unsigned char BYTE;
17312             struct {
17313
17314 #ifdef __RX_LITTLE_ENDIAN__
17315             unsigned char PSEL : 6;
17316             unsigned char : 2;
17317 #else
17318             unsigned char : 2;
17319             unsigned char PSEL : 6;
17320 #endif
17321             } BIT;
17322             } PJ3PFS;
17323             char wk12[1];
17324             union {
17325                 unsigned char BYTE;
17326                 struct {
17327
17328 #ifdef __RX_LITTLE_ENDIAN__
17329                 unsigned char PSEL : 6;
17330                 unsigned char : 2;
17331 #else
17332                 unsigned char : 2;
17333                 unsigned char PSEL : 6;
17334 #endif
17335                 } BIT;
17336                 } PJ5PFS;
17337                 char wk13[2];
17338                 union {
17339                     unsigned char BYTE;
17340                     struct {
17341
17342 #ifdef __RX_LITTLE_ENDIAN__
17343                     unsigned char PSEL : 6;
17344                     unsigned char : 2;
17345 #else
17346                     unsigned char : 2;
17347                     unsigned char PSEL : 6;
17348 #endif
17349                     } BIT;
17350                     } PK0PFS;
17351                     union {
17352                         unsigned char BYTE;
17353                         struct {
17354
17355 #ifdef __RX_LITTLE_ENDIAN__
17356                         unsigned char PSEL : 6;
17357                         unsigned char : 2;
17358 #else
17359                         unsigned char : 2;
17360                         unsigned char PSEL : 6;
17361 #endif
17362                         } BIT;
17363                         } PK1PFS;
17364                         union {
17365                             unsigned char BYTE;
17366                             struct {
17367
17368 #ifdef __RX_LITTLE_ENDIAN__
17369                             unsigned char PSEL : 6;
17370                             unsigned char : 2;
17371 #else
17372                             unsigned char : 2;
17373                             unsigned char PSEL : 6;
17374 #endif
```

```
17375     } BIT;
17376     } PK2PFS;
17377     union {
17378         unsigned char BYTE;
17379         struct {
17380
17381 #ifdef __RX_LITTLE_ENDIAN__
17382         unsigned char PSEL : 6;
17383         unsigned char : 2;
17384 #else
17385         unsigned char : 2;
17386         unsigned char PSEL : 6;
17387 #endif
17388     } BIT;
17389     } PK3PFS;
17390     union {
17391         unsigned char BYTE;
17392         struct {
17393
17394 #ifdef __RX_LITTLE_ENDIAN__
17395         unsigned char PSEL : 6;
17396         unsigned char : 2;
17397 #else
17398         unsigned char : 2;
17399         unsigned char PSEL : 6;
17400 #endif
17401     } BIT;
17402     } PK4PFS;
17403     union {
17404         unsigned char BYTE;
17405         struct {
17406
17407 #ifdef __RX_LITTLE_ENDIAN__
17408         unsigned char PSEL : 6;
17409         unsigned char : 2;
17410 #else
17411         unsigned char : 2;
17412         unsigned char PSEL : 6;
17413 #endif
17414     } BIT;
17415     } PK5PFS;
17416     union {
17417         unsigned char BYTE;
17418         struct {
17419
17420 #ifdef __RX_LITTLE_ENDIAN__
17421         unsigned char PSEL : 6;
17422         unsigned char : 2;
17423 #else
17424         unsigned char : 2;
17425         unsigned char PSEL : 6;
17426 #endif
17427     } BIT;
17428     } PK6PFS;
17429     union {
17430         unsigned char BYTE;
17431         struct {
17432
17433 #ifdef __RX_LITTLE_ENDIAN__
17434         unsigned char PSEL : 6;
17435         unsigned char : 2;
17436 #else
17437         unsigned char : 2;
17438         unsigned char PSEL : 6;
17439 #endif
17440     } BIT;
17441     } PK7PFS;
17442     union {
17443         unsigned char BYTE;
17444         struct {
17445
17446 #ifdef __RX_LITTLE_ENDIAN__
17447         unsigned char PSEL : 6;
17448         unsigned char : 2;
17449 #else
17450         unsigned char : 2;
17451         unsigned char PSEL : 6;
17452 #endif
17453     } BIT;
17454     } PLOPFS;
17455     union {
17456         unsigned char BYTE;
17457         struct {
17458
17459 #ifdef __RX_LITTLE_ENDIAN__
17460         unsigned char PSEL : 6;
17461         unsigned char : 2;
```

```
17462 #else
17463     unsigned char : 2;
17464     unsigned char PSEL : 6;
17465 #endif
17466 } BIT;
17467 } PL1PFS;
17468 union {
17469     unsigned char BYTE;
17470     struct {
17471
17472 #ifdef __RX_LITTLE_ENDIAN__
17473     unsigned char PSEL : 6;
17474     unsigned char : 2;
17475 #else
17476     unsigned char : 2;
17477     unsigned char PSEL : 6;
17478 #endif
17479 } BIT;
17480 } PL2PFS;
17481 union {
17482     unsigned char BYTE;
17483     struct {
17484
17485 #ifdef __RX_LITTLE_ENDIAN__
17486     unsigned char PSEL : 6;
17487     unsigned char : 2;
17488 #else
17489     unsigned char : 2;
17490     unsigned char PSEL : 6;
17491 #endif
17492 } BIT;
17493 } PL3PFS;
17494 union {
17495     unsigned char BYTE;
17496     struct {
17497
17498 #ifdef __RX_LITTLE_ENDIAN__
17499     unsigned char PSEL : 6;
17500     unsigned char : 2;
17501 #else
17502     unsigned char : 2;
17503     unsigned char PSEL : 6;
17504 #endif
17505 } BIT;
17506 } PL4PFS;
17507 union {
17508     unsigned char BYTE;
17509     struct {
17510
17511 #ifdef __RX_LITTLE_ENDIAN__
17512     unsigned char PSEL : 6;
17513     unsigned char : 2;
17514 #else
17515     unsigned char : 2;
17516     unsigned char PSEL : 6;
17517 #endif
17518 } BIT;
17519 } PL5PFS;
17520 union {
17521     unsigned char BYTE;
17522     struct {
17523
17524 #ifdef __RX_LITTLE_ENDIAN__
17525     unsigned char PSEL : 6;
17526     unsigned char : 2;
17527 #else
17528     unsigned char : 2;
17529     unsigned char PSEL : 6;
17530 #endif
17531 } BIT;
17532 } PL6PFS;
17533 union {
17534     unsigned char BYTE;
17535     struct {
17536
17537 #ifdef __RX_LITTLE_ENDIAN__
17538     unsigned char PSEL : 6;
17539     unsigned char : 2;
17540 #else
17541     unsigned char : 2;
17542     unsigned char PSEL : 6;
17543 #endif
17544 } BIT;
17545 } PL7PFS;
17546 union {
17547     unsigned char BYTE;
17548     struct {
```

```
17549
17550 #ifdef __RX_LITTLE_ENDIAN__
17551     unsigned char PSEL : 6;
17552     unsigned char : 2;
17553 #else
17554     unsigned char : 2;
17555     unsigned char PSEL : 6;
17556 #endif
17557 } BIT;
17558 } PM0PFS;
17559 union {
17560     unsigned char BYTE;
17561     struct {
17562
17563 #ifdef __RX_LITTLE_ENDIAN__
17564     unsigned char PSEL : 6;
17565     unsigned char : 2;
17566 #else
17567     unsigned char : 2;
17568     unsigned char PSEL : 6;
17569 #endif
17570 } BIT;
17571 } PM1PFS;
17572 union {
17573     unsigned char BYTE;
17574     struct {
17575
17576 #ifdef __RX_LITTLE_ENDIAN__
17577     unsigned char PSEL : 6;
17578     unsigned char : 2;
17579 #else
17580     unsigned char : 2;
17581     unsigned char PSEL : 6;
17582 #endif
17583 } BIT;
17584 } PM2PFS;
17585 union {
17586     unsigned char BYTE;
17587     struct {
17588
17589 #ifdef __RX_LITTLE_ENDIAN__
17590     unsigned char PSEL : 6;
17591     unsigned char : 2;
17592 #else
17593     unsigned char : 2;
17594     unsigned char PSEL : 6;
17595 #endif
17596 } BIT;
17597 } PM3PFS;
17598 union {
17599     unsigned char BYTE;
17600     struct {
17601
17602 #ifdef __RX_LITTLE_ENDIAN__
17603     unsigned char PSEL : 6;
17604     unsigned char : 2;
17605 #else
17606     unsigned char : 2;
17607     unsigned char PSEL : 6;
17608 #endif
17609 } BIT;
17610 } PM4PFS;
17611 union {
17612     unsigned char BYTE;
17613     struct {
17614
17615 #ifdef __RX_LITTLE_ENDIAN__
17616     unsigned char PSEL : 6;
17617     unsigned char : 2;
17618 #else
17619     unsigned char : 2;
17620     unsigned char PSEL : 6;
17621 #endif
17622 } BIT;
17623 } PM5PFS;
17624 union {
17625     unsigned char BYTE;
17626     struct {
17627
17628 #ifdef __RX_LITTLE_ENDIAN__
17629     unsigned char PSEL : 6;
17630     unsigned char : 2;
17631 #else
17632     unsigned char : 2;
17633     unsigned char PSEL : 6;
17634 #endif
17635 } BIT;
```

```
17636     } PM6PFS;
17637     union {
17638         unsigned char BYTE;
17639         struct {
17640
17641 #ifdef __RX_LITTLE_ENDIAN__
17642         unsigned char PSEL : 6;
17643         unsigned char : 2;
17644 #else
17645         unsigned char : 2;
17646         unsigned char PSEL : 6;
17647 #endif
17648     } BIT;
17649     } PM7PFS;
17650     union {
17651         unsigned char BYTE;
17652         struct {
17653
17654 #ifdef __RX_LITTLE_ENDIAN__
17655         unsigned char PSEL : 6;
17656         unsigned char : 2;
17657 #else
17658         unsigned char : 2;
17659         unsigned char PSEL : 6;
17660 #endif
17661     } BIT;
17662     } PN0PFS;
17663     union {
17664         unsigned char BYTE;
17665         struct {
17666
17667 #ifdef __RX_LITTLE_ENDIAN__
17668         unsigned char PSEL : 6;
17669         unsigned char : 2;
17670 #else
17671         unsigned char : 2;
17672         unsigned char PSEL : 6;
17673 #endif
17674     } BIT;
17675     } PN1PFS;
17676     union {
17677         unsigned char BYTE;
17678         struct {
17679
17680 #ifdef __RX_LITTLE_ENDIAN__
17681         unsigned char PSEL : 6;
17682         unsigned char : 2;
17683 #else
17684         unsigned char : 2;
17685         unsigned char PSEL : 6;
17686 #endif
17687     } BIT;
17688     } PN2PFS;
17689     union {
17690         unsigned char BYTE;
17691         struct {
17692
17693 #ifdef __RX_LITTLE_ENDIAN__
17694         unsigned char PSEL : 6;
17695         unsigned char : 2;
17696 #else
17697         unsigned char : 2;
17698         unsigned char PSEL : 6;
17699 #endif
17700     } BIT;
17701     } PN3PFS;
17702     union {
17703         unsigned char BYTE;
17704         struct {
17705
17706 #ifdef __RX_LITTLE_ENDIAN__
17707         unsigned char PSEL : 6;
17708         unsigned char : 2;
17709 #else
17710         unsigned char : 2;
17711         unsigned char PSEL : 6;
17712 #endif
17713     } BIT;
17714     } PN4PFS;
17715     union {
17716         unsigned char BYTE;
17717         struct {
17718
17719 #ifdef __RX_LITTLE_ENDIAN__
17720         unsigned char PSEL : 6;
17721         unsigned char : 2;
17722 #else
```

```

17723         unsigned char : 2;
17724         unsigned char PSEL : 6;
17725 #endif
17726     } BIT;
17727     } PN5PFS;
17728     char          wk14[2];
17729     union {
17730         unsigned char BYTE;
17731         struct {
17732
17733 #ifdef __RX_LITTLE_ENDIAN__
17734         unsigned char PSEL : 6;
17735         unsigned char : 2;
17736 #else
17737         unsigned char : 2;
17738         unsigned char PSEL : 6;
17739 #endif
17740     } BIT;
17741     } PQ0PFS;
17742     union {
17743         unsigned char BYTE;
17744         struct {
17745
17746 #ifdef __RX_LITTLE_ENDIAN__
17747         unsigned char PSEL : 6;
17748         unsigned char : 2;
17749 #else
17750         unsigned char : 2;
17751         unsigned char PSEL : 6;
17752 #endif
17753     } BIT;
17754     } PQ1PFS;
17755     union {
17756         unsigned char BYTE;
17757         struct {
17758
17759 #ifdef __RX_LITTLE_ENDIAN__
17760         unsigned char PSEL : 6;
17761         unsigned char : 2;
17762 #else
17763         unsigned char : 2;
17764         unsigned char PSEL : 6;
17765 #endif
17766     } BIT;
17767     } PQ2PFS;
17768     union {
17769         unsigned char BYTE;
17770         struct {
17771
17772 #ifdef __RX_LITTLE_ENDIAN__
17773         unsigned char PSEL : 6;
17774         unsigned char : 2;
17775 #else
17776         unsigned char : 2;
17777         unsigned char PSEL : 6;
17778 #endif
17779     } BIT;
17780     } PQ3PFS;
17781     union {
17782         unsigned char BYTE;
17783         struct {
17784
17785 #ifdef __RX_LITTLE_ENDIAN__
17786         unsigned char PSEL : 6;
17787         unsigned char : 2;
17788 #else
17789         unsigned char : 2;
17790         unsigned char PSEL : 6;
17791 #endif
17792     } BIT;
17793     } PQ4PFS;
17794     union {
17795         unsigned char BYTE;
17796         struct {
17797
17798 #ifdef __RX_LITTLE_ENDIAN__
17799         unsigned char PSEL : 6;
17800         unsigned char : 2;
17801 #else
17802         unsigned char : 2;
17803         unsigned char PSEL : 6;
17804 #endif
17805     } BIT;
17806     } PQ5PFS;
17807     union {
17808         unsigned char BYTE;
17809         struct {

```

```
17810
17811 #ifdef __RX_LITTLE_ENDIAN__
17812     unsigned char PSEL : 6;
17813     unsigned char : 2;
17814 #else
17815     unsigned char : 2;
17816     unsigned char PSEL : 6;
17817 #endif
17818     } BIT;
17819     } PQ6PFS;
17820     union {
17821         unsigned char BYTE;
17822         struct {
17823
17824 #ifdef __RX_LITTLE_ENDIAN__
17825         unsigned char PSEL : 6;
17826         unsigned char : 2;
17827 #else
17828         unsigned char : 2;
17829         unsigned char PSEL : 6;
17830 #endif
17831         } BIT;
17832         } PQ7PFS;
17833 } st_mpc_t;
17834
17835 typedef struct st_mpu {
17836     union {
17837         unsigned long LONG;
17838         struct {
17839
17840 #ifdef __RX_LITTLE_ENDIAN__
17841         unsigned long : 4;
17842         unsigned long RSPN : 28;
17843 #else
17844         unsigned long RSPN : 28;
17845         unsigned long : 4;
17846 #endif
17847         } BIT;
17848         } RSPAGE0;
17849     union {
17850         unsigned long LONG;
17851         struct {
17852
17853 #ifdef __RX_LITTLE_ENDIAN__
17854         unsigned long V : 1;
17855         unsigned long UAC : 3;
17856         unsigned long REPN : 28;
17857 #else
17858         unsigned long REPN : 28;
17859         unsigned long UAC : 3;
17860         unsigned long V : 1;
17861 #endif
17862         } BIT;
17863         } REPAGE0;
17864     union {
17865         unsigned long LONG;
17866         struct {
17867
17868 #ifdef __RX_LITTLE_ENDIAN__
17869         unsigned long : 4;
17870         unsigned long RSPN : 28;
17871 #else
17872         unsigned long RSPN : 28;
17873         unsigned long : 4;
17874 #endif
17875         } BIT;
17876         } RSPAGE1;
17877     union {
17878         unsigned long LONG;
17879         struct {
17880
17881 #ifdef __RX_LITTLE_ENDIAN__
17882         unsigned long V : 1;
17883         unsigned long UAC : 3;
17884         unsigned long REPN : 28;
17885 #else
17886         unsigned long REPN : 28;
17887         unsigned long UAC : 3;
17888         unsigned long V : 1;
17889 #endif
17890         } BIT;
17891         } REPAGE1;
17892     union {
17893         unsigned long LONG;
17894         struct {
17895
17896 #ifdef __RX_LITTLE_ENDIAN__
```

```
17897         unsigned long : 4;
17898         unsigned long RSPN : 28;
17899 #else
17900         unsigned long RSPN : 28;
17901         unsigned long : 4;
17902 #endif
17903     } BIT;
17904     } RSPAGE2;
17905     union {
17906         unsigned long LONG;
17907         struct {
17908
17909 #ifdef __RX_LITTLE_ENDIAN__
17910         unsigned long V : 1;
17911         unsigned long UAC : 3;
17912         unsigned long REPN : 28;
17913 #else
17914         unsigned long REPN : 28;
17915         unsigned long UAC : 3;
17916         unsigned long V : 1;
17917 #endif
17918     } BIT;
17919     } REPAGE2;
17920     union {
17921         unsigned long LONG;
17922         struct {
17923
17924 #ifdef __RX_LITTLE_ENDIAN__
17925         unsigned long : 4;
17926         unsigned long RSPN : 28;
17927 #else
17928         unsigned long RSPN : 28;
17929         unsigned long : 4;
17930 #endif
17931     } BIT;
17932     } RSPAGE3;
17933     union {
17934         unsigned long LONG;
17935         struct {
17936
17937 #ifdef __RX_LITTLE_ENDIAN__
17938         unsigned long V : 1;
17939         unsigned long UAC : 3;
17940         unsigned long REPN : 28;
17941 #else
17942         unsigned long REPN : 28;
17943         unsigned long UAC : 3;
17944         unsigned long V : 1;
17945 #endif
17946     } BIT;
17947     } REPAGE3;
17948     union {
17949         unsigned long LONG;
17950         struct {
17951
17952 #ifdef __RX_LITTLE_ENDIAN__
17953         unsigned long : 4;
17954         unsigned long RSPN : 28;
17955 #else
17956         unsigned long RSPN : 28;
17957         unsigned long : 4;
17958 #endif
17959     } BIT;
17960     } RSPAGE4;
17961     union {
17962         unsigned long LONG;
17963         struct {
17964
17965 #ifdef __RX_LITTLE_ENDIAN__
17966         unsigned long V : 1;
17967         unsigned long UAC : 3;
17968         unsigned long REPN : 28;
17969 #else
17970         unsigned long REPN : 28;
17971         unsigned long UAC : 3;
17972         unsigned long V : 1;
17973 #endif
17974     } BIT;
17975     } REPAGE4;
17976     union {
17977         unsigned long LONG;
17978         struct {
17979
17980 #ifdef __RX_LITTLE_ENDIAN__
17981         unsigned long : 4;
17982         unsigned long RSPN : 28;
17983 #else
```

```

17984         unsigned long RSPN : 28;
17985         unsigned long : 4;
17986 #endif
17987     } BIT;
17988     } RSPAGE5;
17989     union {
17990         unsigned long LONG;
17991         struct {
17992
17993 #ifdef __RX_LITTLE_ENDIAN__
17994         unsigned long V : 1;
17995         unsigned long UAC : 3;
17996         unsigned long REPN : 28;
17997 #else
17998         unsigned long REPN : 28;
17999         unsigned long UAC : 3;
18000         unsigned long V : 1;
18001 #endif
18002     } BIT;
18003     } REPAGE5;
18004     union {
18005         unsigned long LONG;
18006         struct {
18007
18008 #ifdef __RX_LITTLE_ENDIAN__
18009         unsigned long : 4;
18010         unsigned long RSPN : 28;
18011 #else
18012         unsigned long RSPN : 28;
18013         unsigned long : 4;
18014 #endif
18015     } BIT;
18016     } RSPAGE6;
18017     union {
18018         unsigned long LONG;
18019         struct {
18020
18021 #ifdef __RX_LITTLE_ENDIAN__
18022         unsigned long V : 1;
18023         unsigned long UAC : 3;
18024         unsigned long REPN : 28;
18025 #else
18026         unsigned long REPN : 28;
18027         unsigned long UAC : 3;
18028         unsigned long V : 1;
18029 #endif
18030     } BIT;
18031     } REPAGE6;
18032     union {
18033         unsigned long LONG;
18034         struct {
18035
18036 #ifdef __RX_LITTLE_ENDIAN__
18037         unsigned long : 4;
18038         unsigned long RSPN : 28;
18039 #else
18040         unsigned long RSPN : 28;
18041         unsigned long : 4;
18042 #endif
18043     } BIT;
18044     } RSPAGE7;
18045     union {
18046         unsigned long LONG;
18047         struct {
18048
18049 #ifdef __RX_LITTLE_ENDIAN__
18050         unsigned long V : 1;
18051         unsigned long UAC : 3;
18052         unsigned long REPN : 28;
18053 #else
18054         unsigned long REPN : 28;
18055         unsigned long UAC : 3;
18056         unsigned long V : 1;
18057 #endif
18058     } BIT;
18059     } REPAGE7;
18060     char wk0[192];
18061     union {
18062         unsigned long LONG;
18063         struct {
18064
18065 #ifdef __RX_LITTLE_ENDIAN__
18066         unsigned long MPEN : 1;
18067         unsigned long : 31;
18068 #else
18069         unsigned long : 31;
18070         unsigned long MPEN : 1;

```

```

18071 #endif
18072     } BIT;
18073     } MPEN;
18074     union {
18075         unsigned long LONG;
18076         struct {
18077
18078 #ifdef __RX_LITTLE_ENDIAN__
18079         unsigned long : 1;
18080         unsigned long UBAC : 3;
18081         unsigned long : 28;
18082 #else
18083         unsigned long : 28;
18084         unsigned long UBAC : 3;
18085         unsigned long : 1;
18086 #endif
18087     } BIT;
18088     } MPBAC;
18089     union {
18090         unsigned long LONG;
18091         struct {
18092
18093 #ifdef __RX_LITTLE_ENDIAN__
18094         unsigned long CLR : 1;
18095         unsigned long : 31;
18096 #else
18097         unsigned long : 31;
18098         unsigned long CLR : 1;
18099 #endif
18100     } BIT;
18101     } MPECLR;
18102     union {
18103         unsigned long LONG;
18104         struct {
18105
18106 #ifdef __RX_LITTLE_ENDIAN__
18107         unsigned long IMPER : 1;
18108         unsigned long DMPER : 1;
18109         unsigned long DRW : 1;
18110         unsigned long : 29;
18111 #else
18112         unsigned long : 29;
18113         unsigned long DRW : 1;
18114         unsigned long DMPER : 1;
18115         unsigned long IMPER : 1;
18116 #endif
18117     } BIT;
18118     } MPESTS;
18119     char        wk1[4];
18120     union {
18121         unsigned long LONG;
18122         struct {
18123
18124 #ifdef __RX_LITTLE_ENDIAN__
18125         unsigned long DEA : 32;
18126 #else
18127         unsigned long DEA : 32;
18128 #endif
18129     } BIT;
18130     } MPDEA;
18131     char        wk2[8];
18132     union {
18133         unsigned long LONG;
18134         struct {
18135
18136 #ifdef __RX_LITTLE_ENDIAN__
18137         unsigned long SA : 32;
18138 #else
18139         unsigned long SA : 32;
18140 #endif
18141     } BIT;
18142     } MPSA;
18143     union {
18144         unsigned short WORD;
18145         struct {
18146
18147 #ifdef __RX_LITTLE_ENDIAN__
18148         unsigned short S : 1;
18149         unsigned short : 15;
18150 #else
18151         unsigned short : 15;
18152         unsigned short S : 1;
18153 #endif
18154     } BIT;
18155     } MPOPS;
18156     union {
18157         unsigned short WORD;

```

```

18158     struct {
18159
18160 #ifdef __RX_LITTLE_ENDIAN__
18161     unsigned short INV : 1;
18162     unsigned short : 15;
18163 #else
18164     unsigned short : 15;
18165     unsigned short INV : 1;
18166 #endif
18167     } BIT;
18168     } MPOPI;
18169     union {
18170     unsigned long LONG;
18171     struct {
18172
18173 #ifdef __RX_LITTLE_ENDIAN__
18174     unsigned long : 1;
18175     unsigned long UHACI : 3;
18176     unsigned long : 12;
18177     unsigned long HITI : 8;
18178     unsigned long : 8;
18179 #else
18180     unsigned long : 8;
18181     unsigned long HITI : 8;
18182     unsigned long : 12;
18183     unsigned long UHACI : 3;
18184     unsigned long : 1;
18185 #endif
18186     } BIT;
18187     } MHITI;
18188     union {
18189     unsigned long LONG;
18190     struct {
18191
18192 #ifdef __RX_LITTLE_ENDIAN__
18193     unsigned long : 1;
18194     unsigned long UHACD : 3;
18195     unsigned long : 12;
18196     unsigned long HITD : 8;
18197     unsigned long : 8;
18198 #else
18199     unsigned long : 8;
18200     unsigned long HITD : 8;
18201     unsigned long : 12;
18202     unsigned long UHACD : 3;
18203     unsigned long : 1;
18204 #endif
18205     } BIT;
18206     } MHITD;
18207 } st_mpu_t;
18208
18209 typedef struct st_mtu {
18210     union {
18211     unsigned char BYTE;
18212     struct {
18213
18214 #ifdef __RX_LITTLE_ENDIAN__
18215     unsigned char OE3B : 1;
18216     unsigned char OE4A : 1;
18217     unsigned char OE4B : 1;
18218     unsigned char OE3D : 1;
18219     unsigned char OE4C : 1;
18220     unsigned char OE4D : 1;
18221     unsigned char : 2;
18222 #else
18223     unsigned char : 2;
18224     unsigned char OE4D : 1;
18225     unsigned char OE4C : 1;
18226     unsigned char OE3D : 1;
18227     unsigned char OE4B : 1;
18228     unsigned char OE4A : 1;
18229     unsigned char OE3B : 1;
18230 #endif
18231     } BIT;
18232     } TOERA;
18233     char wk0[2];
18234     union {
18235     unsigned char BYTE;
18236     struct {
18237
18238 #ifdef __RX_LITTLE_ENDIAN__
18239     unsigned char UF : 1;
18240     unsigned char VF : 1;
18241     unsigned char WF : 1;
18242     unsigned char FB : 1;
18243     unsigned char P : 1;
18244     unsigned char N : 1;

```

```

18245         unsigned char BDC : 1;
18246         unsigned char : 1;
18247 #else
18248         unsigned char : 1;
18249         unsigned char BDC : 1;
18250         unsigned char N : 1;
18251         unsigned char P : 1;
18252         unsigned char FB : 1;
18253         unsigned char WF : 1;
18254         unsigned char VF : 1;
18255         unsigned char UF : 1;
18256 #endif
18257     } BIT;
18258     } TGCRA;
18259     union {
18260         unsigned char BYTE;
18261     struct {
18262
18263 #ifdef __RX_LITTLE_ENDIAN__
18264         unsigned char OLSP : 1;
18265         unsigned char OLSN : 1;
18266         unsigned char TOCS : 1;
18267         unsigned char TOCL : 1;
18268         unsigned char : 2;
18269         unsigned char PSYE : 1;
18270         unsigned char : 1;
18271 #else
18272         unsigned char : 1;
18273         unsigned char PSYE : 1;
18274         unsigned char : 2;
18275         unsigned char TOCL : 1;
18276         unsigned char TOCS : 1;
18277         unsigned char OLSN : 1;
18278         unsigned char OLSP : 1;
18279 #endif
18280     } BIT;
18281     } TOCR1A;
18282     union {
18283         unsigned char BYTE;
18284     struct {
18285
18286 #ifdef __RX_LITTLE_ENDIAN__
18287         unsigned char OLS1P : 1;
18288         unsigned char OLS1N : 1;
18289         unsigned char OLS2P : 1;
18290         unsigned char OLS2N : 1;
18291         unsigned char OLS3P : 1;
18292         unsigned char OLS3N : 1;
18293         unsigned char BF : 2;
18294 #else
18295         unsigned char BF : 2;
18296         unsigned char OLS3N : 1;
18297         unsigned char OLS3P : 1;
18298         unsigned char OLS2N : 1;
18299         unsigned char OLS2P : 1;
18300         unsigned char OLS1N : 1;
18301         unsigned char OLS1P : 1;
18302 #endif
18303     } BIT;
18304     } TOCR2A;
18305     char wk1[4];
18306     unsigned short TCDRA;
18307     unsigned short TDDRA;
18308     char wk2[8];
18309     unsigned short TCNTSA;
18310     unsigned short TCBRA;
18311     char wk3[12];
18312     union {
18313         unsigned char BYTE;
18314     struct {
18315
18316 #ifdef __RX_LITTLE_ENDIAN__
18317         unsigned char T4VCOR : 3;
18318         unsigned char T4VEN : 1;
18319         unsigned char T3ACOR : 3;
18320         unsigned char T3AEN : 1;
18321 #else
18322         unsigned char T3AEN : 1;
18323         unsigned char T3ACOR : 3;
18324         unsigned char T4VEN : 1;
18325         unsigned char T4VCOR : 3;
18326 #endif
18327     } BIT;
18328     } TITCR1A;
18329     union {
18330         unsigned char BYTE;
18331     struct {

```

```

18332
18333 #ifndef __RX_LITTLE_ENDIAN__
18334     unsigned char T4VCNT : 3;
18335     unsigned char : 1;
18336     unsigned char T3ACNT : 3;
18337     unsigned char : 1;
18338 #else
18339     unsigned char : 1;
18340     unsigned char T3ACNT : 3;
18341     unsigned char : 1;
18342     unsigned char T4VCNT : 3;
18343 #endif
18344 } BIT;
18345 } TITCNT1A;
18346 union {
18347     unsigned char BYTE;
18348     struct {
18349
18350 #ifndef __RX_LITTLE_ENDIAN__
18351     unsigned char BTE : 2;
18352     unsigned char : 6;
18353 #else
18354     unsigned char : 6;
18355     unsigned char BTE : 2;
18356 #endif
18357     } BIT;
18358     } TBTERA;
18359     char wk4[1];
18360     union {
18361     unsigned char BYTE;
18362     struct {
18363
18364 #ifndef __RX_LITTLE_ENDIAN__
18365     unsigned char TDER : 1;
18366     unsigned char : 7;
18367 #else
18368     unsigned char : 7;
18369     unsigned char TDER : 1;
18370 #endif
18371     } BIT;
18372     } TDERA;
18373     char wk5[1];
18374     union {
18375     unsigned char BYTE;
18376     struct {
18377
18378 #ifndef __RX_LITTLE_ENDIAN__
18379     unsigned char OLS1P : 1;
18380     unsigned char OLS1N : 1;
18381     unsigned char OLS2P : 1;
18382     unsigned char OLS2N : 1;
18383     unsigned char OLS3P : 1;
18384     unsigned char OLS3N : 1;
18385     unsigned char : 2;
18386 #else
18387     unsigned char : 2;
18388     unsigned char OLS3N : 1;
18389     unsigned char OLS3P : 1;
18390     unsigned char OLS2N : 1;
18391     unsigned char OLS2P : 1;
18392     unsigned char OLS1N : 1;
18393     unsigned char OLS1P : 1;
18394 #endif
18395     } BIT;
18396     } TOLBRA;
18397     char wk6[3];
18398     union {
18399     unsigned char BYTE;
18400     struct {
18401
18402 #ifndef __RX_LITTLE_ENDIAN__
18403     unsigned char TITM : 1;
18404     unsigned char : 7;
18405 #else
18406     unsigned char : 7;
18407     unsigned char TITM : 1;
18408 #endif
18409     } BIT;
18410     } TITMRA;
18411     union {
18412     unsigned char BYTE;
18413     struct {
18414
18415 #ifndef __RX_LITTLE_ENDIAN__
18416     unsigned char TRG4COR : 3;
18417     unsigned char : 5;
18418 #else

```

```

18419         unsigned char : 5;
18420         unsigned char TRG4COR : 3;
18421     #endif
18422     } BIT;
18423     } TITCR2A;
18424     union {
18425         unsigned char BYTE;
18426         struct {
18427
18428     #ifdef __RX_LITTLE_ENDIAN__
18429         unsigned char TRG4CNT : 3;
18430         unsigned char : 5;
18431     #else
18432         unsigned char : 5;
18433         unsigned char TRG4CNT : 3;
18434     #endif
18435     } BIT;
18436     } TITCNT2A;
18437     char          wk7[35];
18438     union {
18439         unsigned char BYTE;
18440         struct {
18441
18442     #ifdef __RX_LITTLE_ENDIAN__
18443         unsigned char WRE : 1;
18444         unsigned char SCC : 1;
18445         unsigned char : 5;
18446         unsigned char CCE : 1;
18447     #else
18448         unsigned char CCE : 1;
18449         unsigned char : 5;
18450         unsigned char SCC : 1;
18451         unsigned char WRE : 1;
18452     #endif
18453     } BIT;
18454     } TWCRA;
18455     char          wk8[15];
18456     union {
18457         unsigned char BYTE;
18458         struct {
18459
18460     #ifdef __RX_LITTLE_ENDIAN__
18461         unsigned char DRS : 1;
18462         unsigned char : 7;
18463     #else
18464         unsigned char : 7;
18465         unsigned char DRS : 1;
18466     #endif
18467     } BIT;
18468     } TMDR2A;
18469     char          wk9[15];
18470     union {
18471         unsigned char BYTE;
18472         struct {
18473
18474     #ifdef __RX_LITTLE_ENDIAN__
18475         unsigned char CST0 : 1;
18476         unsigned char CST1 : 1;
18477         unsigned char CST2 : 1;
18478         unsigned char CST8 : 1;
18479         unsigned char : 2;
18480         unsigned char CST3 : 1;
18481         unsigned char CST4 : 1;
18482     #else
18483         unsigned char CST4 : 1;
18484         unsigned char CST3 : 1;
18485         unsigned char : 2;
18486         unsigned char CST8 : 1;
18487         unsigned char CST2 : 1;
18488         unsigned char CST1 : 1;
18489         unsigned char CST0 : 1;
18490     #endif
18491     } BIT;
18492     } TSTRA;
18493     union {
18494         unsigned char BYTE;
18495         struct {
18496
18497     #ifdef __RX_LITTLE_ENDIAN__
18498         unsigned char SYNC0 : 1;
18499         unsigned char SYNC1 : 1;
18500         unsigned char SYNC2 : 1;
18501         unsigned char : 3;
18502         unsigned char SYNC3 : 1;
18503         unsigned char SYNC4 : 1;
18504     #else
18505         unsigned char SYNC4 : 1;

```

```

18506         unsigned char SYNC3 : 1;
18507         unsigned char  : 3;
18508         unsigned char SYNC2 : 1;
18509         unsigned char SYNC1 : 1;
18510         unsigned char SYNC0 : 1;
18511     #endif
18512     } BIT;
18513     } TSYRA;
18514     union {
18515         unsigned char BYTE;
18516         struct {
18517
18518     #ifdef __RX_LITTLE_ENDIAN__
18519         unsigned char SCH7 : 1;
18520         unsigned char SCH6 : 1;
18521         unsigned char  : 1;
18522         unsigned char SCH4 : 1;
18523         unsigned char SCH3 : 1;
18524         unsigned char SCH2 : 1;
18525         unsigned char SCH1 : 1;
18526         unsigned char SCH0 : 1;
18527     #else
18528         unsigned char SCH0 : 1;
18529         unsigned char SCH1 : 1;
18530         unsigned char SCH2 : 1;
18531         unsigned char SCH3 : 1;
18532         unsigned char SCH4 : 1;
18533         unsigned char  : 1;
18534         unsigned char SCH6 : 1;
18535         unsigned char SCH7 : 1;
18536     #endif
18537     } BIT;
18538     } TCSYSTR;
18539     char      wk10[1];
18540     union {
18541         unsigned char BYTE;
18542         struct {
18543
18544     #ifdef __RX_LITTLE_ENDIAN__
18545         unsigned char RWE : 1;
18546         unsigned char  : 7;
18547     #else
18548         unsigned char  : 7;
18549         unsigned char RWE : 1;
18550     #endif
18551     } BIT;
18552     } TRWERA;
18553     char      wk11[1925];
18554     union {
18555         unsigned char BYTE;
18556         struct {
18557
18558     #ifdef __RX_LITTLE_ENDIAN__
18559         unsigned char OE6B : 1;
18560         unsigned char OE7A : 1;
18561         unsigned char OE7B : 1;
18562         unsigned char OE6D : 1;
18563         unsigned char OE7C : 1;
18564         unsigned char OE7D : 1;
18565         unsigned char  : 2;
18566     #else
18567         unsigned char  : 2;
18568         unsigned char OE7D : 1;
18569         unsigned char OE7C : 1;
18570         unsigned char OE6D : 1;
18571         unsigned char OE7B : 1;
18572         unsigned char OE7A : 1;
18573         unsigned char OE6B : 1;
18574     #endif
18575     } BIT;
18576     } TOERB;
18577     char      wk12[3];
18578     union {
18579         unsigned char BYTE;
18580         struct {
18581
18582     #ifdef __RX_LITTLE_ENDIAN__
18583         unsigned char OLSP : 1;
18584         unsigned char OLSN : 1;
18585         unsigned char TOCS : 1;
18586         unsigned char TOCL : 1;
18587         unsigned char  : 2;
18588         unsigned char PSYE : 1;
18589         unsigned char  : 1;
18590     #else
18591         unsigned char  : 1;
18592         unsigned char PSYE : 1;

```

```

18593         unsigned char : 2;
18594         unsigned char TOCL : 1;
18595         unsigned char TOCS : 1;
18596         unsigned char OLSN : 1;
18597         unsigned char OLSP : 1;
18598     #endif
18599     } BIT;
18600     } TOCR1B;
18601     union {
18602         unsigned char BYTE;
18603     struct {
18604
18605     #ifdef __RX_LITTLE_ENDIAN__
18606         unsigned char OLS1P : 1;
18607         unsigned char OLS1N : 1;
18608         unsigned char OLS2P : 1;
18609         unsigned char OLS2N : 1;
18610         unsigned char OLS3P : 1;
18611         unsigned char OLS3N : 1;
18612         unsigned char BF : 2;
18613     #else
18614         unsigned char BF : 2;
18615         unsigned char OLS3N : 1;
18616         unsigned char OLS3P : 1;
18617         unsigned char OLS2N : 1;
18618         unsigned char OLS2P : 1;
18619         unsigned char OLS1N : 1;
18620         unsigned char OLS1P : 1;
18621     #endif
18622     } BIT;
18623     } TOCR2B;
18624     char        wk13[4];
18625     unsigned short TCDRB;
18626     unsigned short TDDRb;
18627     char        wk14[8];
18628     unsigned short TCNTSB;
18629     unsigned short TCB RB;
18630     char        wk15[12];
18631     union {
18632         unsigned char BYTE;
18633     struct {
18634
18635     #ifdef __RX_LITTLE_ENDIAN__
18636         unsigned char T7VCOR : 3;
18637         unsigned char T7VEN : 1;
18638         unsigned char T6ACOR : 3;
18639         unsigned char T6AEN : 1;
18640     #else
18641         unsigned char T6AEN : 1;
18642         unsigned char T6ACOR : 3;
18643         unsigned char T7VEN : 1;
18644         unsigned char T7VCOR : 3;
18645     #endif
18646     } BIT;
18647     } TITCR1B;
18648     union {
18649         unsigned char BYTE;
18650     struct {
18651
18652     #ifdef __RX_LITTLE_ENDIAN__
18653         unsigned char T7VCNT : 3;
18654         unsigned char : 1;
18655         unsigned char T6ACNT : 3;
18656         unsigned char : 1;
18657     #else
18658         unsigned char : 1;
18659         unsigned char T6ACNT : 3;
18660         unsigned char : 1;
18661         unsigned char T7VCNT : 3;
18662     #endif
18663     } BIT;
18664     } TITCNT1B;
18665     union {
18666         unsigned char BYTE;
18667     struct {
18668
18669     #ifdef __RX_LITTLE_ENDIAN__
18670         unsigned char BTE : 2;
18671         unsigned char : 6;
18672     #else
18673         unsigned char : 6;
18674         unsigned char BTE : 2;
18675     #endif
18676     } BIT;
18677     } TBTERB;
18678     char        wk16[1];
18679     union {

```

```

18680     unsigned char BYTE;
18681     struct {
18682
18683 #ifdef __RX_LITTLE_ENDIAN__
18684     unsigned char TDER : 1;
18685     unsigned char : 7;
18686 #else
18687     unsigned char : 7;
18688     unsigned char TDER : 1;
18689 #endif
18690     } BIT;
18691     } TDERB;
18692     char      wk17[1];
18693     union {
18694     unsigned char BYTE;
18695     struct {
18696
18697 #ifdef __RX_LITTLE_ENDIAN__
18698     unsigned char OLS1P : 1;
18699     unsigned char OLS1N : 1;
18700     unsigned char OLS2P : 1;
18701     unsigned char OLS2N : 1;
18702     unsigned char OLS3P : 1;
18703     unsigned char OLS3N : 1;
18704     unsigned char : 2;
18705 #else
18706     unsigned char : 2;
18707     unsigned char OLS3N : 1;
18708     unsigned char OLS3P : 1;
18709     unsigned char OLS2N : 1;
18710     unsigned char OLS2P : 1;
18711     unsigned char OLS1N : 1;
18712     unsigned char OLS1P : 1;
18713 #endif
18714     } BIT;
18715     } TOLBRB;
18716     char      wk18[3];
18717     union {
18718     unsigned char BYTE;
18719     struct {
18720
18721 #ifdef __RX_LITTLE_ENDIAN__
18722     unsigned char TITM : 1;
18723     unsigned char : 7;
18724 #else
18725     unsigned char : 7;
18726     unsigned char TITM : 1;
18727 #endif
18728     } BIT;
18729     } TITMRB;
18730     union {
18731     unsigned char BYTE;
18732     struct {
18733
18734 #ifdef __RX_LITTLE_ENDIAN__
18735     unsigned char TRG7COR : 3;
18736     unsigned char : 5;
18737 #else
18738     unsigned char : 5;
18739     unsigned char TRG7COR : 3;
18740 #endif
18741     } BIT;
18742     } TITCR2B;
18743     union {
18744     unsigned char BYTE;
18745     struct {
18746
18747 #ifdef __RX_LITTLE_ENDIAN__
18748     unsigned char TRG7CNT : 3;
18749     unsigned char : 5;
18750 #else
18751     unsigned char : 5;
18752     unsigned char TRG7CNT : 3;
18753 #endif
18754     } BIT;
18755     } TITCNT2B;
18756     char      wk19[35];
18757     union {
18758     unsigned char BYTE;
18759     struct {
18760
18761 #ifdef __RX_LITTLE_ENDIAN__
18762     unsigned char WRE : 1;
18763     unsigned char SCC : 1;
18764     unsigned char : 5;
18765     unsigned char CCE : 1;
18766 #else

```

```

18767         unsigned char CCE : 1;
18768         unsigned char : 5;
18769         unsigned char SCC : 1;
18770         unsigned char WRE : 1;
18771     #endif
18772     } BIT;
18773     } TWCRB;
18774     char          wk20[15];
18775     union {
18776         unsigned char BYTE;
18777         struct {
18778
18779     #ifdef __RX_LITTLE_ENDIAN__
18780         unsigned char DRS : 1;
18781         unsigned char : 7;
18782     #else
18783         unsigned char : 7;
18784         unsigned char DRS : 1;
18785     #endif
18786     } BIT;
18787     } TMDR2B;
18788     char          wk21[15];
18789     union {
18790         unsigned char BYTE;
18791         struct {
18792
18793     #ifdef __RX_LITTLE_ENDIAN__
18794         unsigned char : 6;
18795         unsigned char CST6 : 1;
18796         unsigned char CST7 : 1;
18797     #else
18798         unsigned char CST7 : 1;
18799         unsigned char CST6 : 1;
18800         unsigned char : 6;
18801     #endif
18802     } BIT;
18803     } TSTRB;
18804     union {
18805         unsigned char BYTE;
18806         struct {
18807
18808     #ifdef __RX_LITTLE_ENDIAN__
18809         unsigned char : 6;
18810         unsigned char SYNC6 : 1;
18811         unsigned char SYNC7 : 1;
18812     #else
18813         unsigned char SYNC7 : 1;
18814         unsigned char SYNC6 : 1;
18815         unsigned char : 6;
18816     #endif
18817     } BIT;
18818     } TSYRB;
18819     char          wk22[2];
18820     union {
18821         unsigned char BYTE;
18822         struct {
18823
18824     #ifdef __RX_LITTLE_ENDIAN__
18825         unsigned char RWE : 1;
18826         unsigned char : 7;
18827     #else
18828         unsigned char : 7;
18829         unsigned char RWE : 1;
18830     #endif
18831     } BIT;
18832     } TRWERB;
18833 } st_mtu_t;
18834
18835 typedef struct st_mtu0 {
18836     union {
18837         unsigned char BYTE;
18838         struct {
18839
18840     #ifdef __RX_LITTLE_ENDIAN__
18841         unsigned char NFAEN : 1;
18842         unsigned char NFBEN : 1;
18843         unsigned char NFCEN : 1;
18844         unsigned char NFDEN : 1;
18845         unsigned char NFCS : 2;
18846         unsigned char : 2;
18847     #else
18848         unsigned char : 2;
18849         unsigned char NFCS : 2;
18850         unsigned char NFDEN : 1;
18851         unsigned char NFCEN : 1;
18852         unsigned char NFBEN : 1;
18853         unsigned char NFAEN : 1;

```

```

18854 #endif
18855     } BIT;
18856     } NFCR0;
18857     char          wk0[8];
18858     union {
18859         unsigned char BYTE;
18860         struct {
18861
18862 #ifdef __RX_LITTLE_ENDIAN__
18863         unsigned char NFAEN : 1;
18864         unsigned char NFBEN : 1;
18865         unsigned char NFCEN : 1;
18866         unsigned char NFDEN : 1;
18867         unsigned char NFCS : 2;
18868         unsigned char      : 2;
18869 #else
18870         unsigned char      : 2;
18871         unsigned char NFCS : 2;
18872         unsigned char NFDEN : 1;
18873         unsigned char NFCEN : 1;
18874         unsigned char NFBEN : 1;
18875         unsigned char NFAEN : 1;
18876 #endif
18877     } BIT;
18878     } NFCRC;
18879     char          wk1[102];
18880     union {
18881         unsigned char BYTE;
18882         struct {
18883
18884 #ifdef __RX_LITTLE_ENDIAN__
18885         unsigned char TPSC : 3;
18886         unsigned char CKEG : 2;
18887         unsigned char CCLR : 3;
18888 #else
18889         unsigned char CCLR : 3;
18890         unsigned char CKEG : 2;
18891         unsigned char TPSC : 3;
18892 #endif
18893     } BIT;
18894     } TCR;
18895     union {
18896         unsigned char BYTE;
18897         struct {
18898
18899 #ifdef __RX_LITTLE_ENDIAN__
18900         unsigned char MD : 4;
18901         unsigned char BFA : 1;
18902         unsigned char BFB : 1;
18903         unsigned char BFE : 1;
18904         unsigned char      : 1;
18905 #else
18906         unsigned char      : 1;
18907         unsigned char BFE : 1;
18908         unsigned char BFB : 1;
18909         unsigned char BFA : 1;
18910         unsigned char MD : 4;
18911 #endif
18912     } BIT;
18913     } TMDR1;
18914     union {
18915         unsigned char BYTE;
18916         struct {
18917
18918 #ifdef __RX_LITTLE_ENDIAN__
18919         unsigned char IOA : 4;
18920         unsigned char IOB : 4;
18921 #else
18922         unsigned char IOB : 4;
18923         unsigned char IOA : 4;
18924 #endif
18925     } BIT;
18926     } TIORH;
18927     union {
18928         unsigned char BYTE;
18929         struct {
18930
18931 #ifdef __RX_LITTLE_ENDIAN__
18932         unsigned char IOC : 4;
18933         unsigned char IOD : 4;
18934 #else
18935         unsigned char IOD : 4;
18936         unsigned char IOC : 4;
18937 #endif
18938     } BIT;
18939     } TIORL;
18940     union {

```

```

18941     unsigned char BYTE;
18942     struct {
18943
18944 #ifdef __RX_LITTLE_ENDIAN__
18945     unsigned char TGIEA : 1;
18946     unsigned char TGIEB : 1;
18947     unsigned char TGIEC : 1;
18948     unsigned char TGIED : 1;
18949     unsigned char TCIEV : 1;
18950     unsigned char : 2;
18951     unsigned char TTGE : 1;
18952 #else
18953     unsigned char TTGE : 1;
18954     unsigned char : 2;
18955     unsigned char TCIEV : 1;
18956     unsigned char TGIED : 1;
18957     unsigned char TGIEC : 1;
18958     unsigned char TGIEB : 1;
18959     unsigned char TGIEA : 1;
18960 #endif
18961     } BIT;
18962     } TIER;
18963     char          wk2[1];
18964     unsigned short TCNT;
18965     unsigned short TGRA;
18966     unsigned short TGRB;
18967     unsigned short TGRC;
18968     unsigned short TGRD;
18969     char          wk3[16];
18970     unsigned short TGRE;
18971     unsigned short TGRF;
18972     union {
18973         unsigned char BYTE;
18974     } struct {
18975
18976 #ifdef __RX_LITTLE_ENDIAN__
18977     unsigned char TGIEE : 1;
18978     unsigned char TGIEF : 1;
18979     unsigned char : 5;
18980     unsigned char TTGE2 : 1;
18981 #else
18982     unsigned char TTGE2 : 1;
18983     unsigned char : 5;
18984     unsigned char TGIEF : 1;
18985     unsigned char TGIEE : 1;
18986 #endif
18987     } BIT;
18988     } TIER2;
18989     char          wk4[1];
18990     union {
18991         unsigned char BYTE;
18992     } struct {
18993
18994 #ifdef __RX_LITTLE_ENDIAN__
18995     unsigned char TTSA : 1;
18996     unsigned char TTSB : 1;
18997     unsigned char TTSE : 1;
18998     unsigned char : 5;
18999 #else
19000     unsigned char : 5;
19001     unsigned char TTSE : 1;
19002     unsigned char TTSB : 1;
19003     unsigned char TTSA : 1;
19004 #endif
19005     } BIT;
19006     } TBTM;
19007     char          wk5[1];
19008     union {
19009         unsigned char BYTE;
19010     } struct {
19011
19012 #ifdef __RX_LITTLE_ENDIAN__
19013     unsigned char TPSC2 : 3;
19014     unsigned char : 5;
19015 #else
19016     unsigned char : 5;
19017     unsigned char TPSC2 : 3;
19018 #endif
19019     } BIT;
19020     } TCR2;
19021 } st_mtu0_t;
19022
19023 typedef struct st_mtu1 {
19024     char          wk0[1];
19025     union {
19026         unsigned char BYTE;
19027     } struct {

```

```
19028
19029 #ifdef __RX_LITTLE_ENDIAN__
19030     unsigned char NFAEN : 1;
19031     unsigned char NFBEN : 1;
19032     unsigned char NFCEN : 1;
19033     unsigned char NFDEN : 1;
19034     unsigned char NFCS : 2;
19035     unsigned char : 2;
19036 #else
19037     unsigned char : 2;
19038     unsigned char NFCS : 2;
19039     unsigned char NFDEN : 1;
19040     unsigned char NFCEN : 1;
19041     unsigned char NFBEN : 1;
19042     unsigned char NFAEN : 1;
19043 #endif
19044     } BIT;
19045     } NFCR1;
19046     char          wk1[238];
19047     union {
19048         unsigned char BYTE;
19049         struct {
19050
19051 #ifdef __RX_LITTLE_ENDIAN__
19052         unsigned char TPSC : 3;
19053         unsigned char CKEG : 2;
19054         unsigned char CCLR : 2;
19055         unsigned char : 1;
19056 #else
19057         unsigned char : 1;
19058         unsigned char CCLR : 2;
19059         unsigned char CKEG : 2;
19060         unsigned char TPSC : 3;
19061 #endif
19062         } BIT;
19063         } TCR;
19064         union {
19065             unsigned char BYTE;
19066             struct {
19067
19068 #ifdef __RX_LITTLE_ENDIAN__
19069             unsigned char MD : 4;
19070             unsigned char : 4;
19071 #else
19072             unsigned char : 4;
19073             unsigned char MD : 4;
19074 #endif
19075             } BIT;
19076             } TMDR1;
19077             union {
19078                 unsigned char BYTE;
19079                 struct {
19080
19081 #ifdef __RX_LITTLE_ENDIAN__
19082                 unsigned char IOA : 4;
19083                 unsigned char IOB : 4;
19084 #else
19085                 unsigned char IOB : 4;
19086                 unsigned char IOA : 4;
19087 #endif
19088                 } BIT;
19089                 } TIOR;
19090                 char          wk2[1];
19091                 union {
19092                     unsigned char BYTE;
19093                     struct {
19094
19095 #ifdef __RX_LITTLE_ENDIAN__
19096                     unsigned char TGIEA : 1;
19097                     unsigned char TGIEB : 1;
19098                     unsigned char : 2;
19099                     unsigned char TCIEV : 1;
19100                     unsigned char TCIEU : 1;
19101                     unsigned char : 1;
19102                     unsigned char TTGE : 1;
19103 #else
19104                     unsigned char TTGE : 1;
19105                     unsigned char : 1;
19106                     unsigned char TCIEU : 1;
19107                     unsigned char TCIEV : 1;
19108                     unsigned char : 2;
19109                     unsigned char TGIEB : 1;
19110                     unsigned char TGIEA : 1;
19111 #endif
19112                     } BIT;
19113                     } TIER;
19114                     union {
```

```

19115     unsigned char BYTE;
19116     struct {
19117
19118 #ifdef __RX_LITTLE_ENDIAN__
19119     unsigned char : 7;
19120     unsigned char TCFD : 1;
19121 #else
19122     unsigned char TCFD : 1;
19123     unsigned char : 7;
19124 #endif
19125     } BIT;
19126     } TSR;
19127     unsigned short TCNT;
19128     unsigned short TGRA;
19129     unsigned short TGRB;
19130     char          wk3[4];
19131     union {
19132     unsigned char BYTE;
19133     struct {
19134
19135 #ifdef __RX_LITTLE_ENDIAN__
19136     unsigned char I1AE : 1;
19137     unsigned char I1BE : 1;
19138     unsigned char I2AE : 1;
19139     unsigned char I2BE : 1;
19140     unsigned char : 4;
19141 #else
19142     unsigned char : 4;
19143     unsigned char I2BE : 1;
19144     unsigned char I2AE : 1;
19145     unsigned char I1BE : 1;
19146     unsigned char I1AE : 1;
19147 #endif
19148     } BIT;
19149     } TICCR;
19150     union {
19151     unsigned char BYTE;
19152     struct {
19153
19154 #ifdef __RX_LITTLE_ENDIAN__
19155     unsigned char LWA : 1;
19156     unsigned char PHCKSEL : 1;
19157     unsigned char : 6;
19158 #else
19159     unsigned char : 6;
19160     unsigned char PHCKSEL : 1;
19161     unsigned char LWA : 1;
19162 #endif
19163     } BIT;
19164     } TMDR3;
19165     char          wk4[2];
19166     union {
19167     unsigned char BYTE;
19168     struct {
19169
19170 #ifdef __RX_LITTLE_ENDIAN__
19171     unsigned char TPSC2 : 3;
19172     unsigned char PCB : 2;
19173     unsigned char : 3;
19174 #else
19175     unsigned char : 3;
19176     unsigned char PCB : 2;
19177     unsigned char TPSC2 : 3;
19178 #endif
19179     } BIT;
19180     } TCR2;
19181     char          wk5[11];
19182     unsigned long TCNTLW;
19183     unsigned long TGRALW;
19184     unsigned long TGRBLW;
19185 } st_mtu1_t;
19186
19187 typedef struct st_mtu2 {
19188     union {
19189     unsigned char BYTE;
19190     struct {
19191
19192 #ifdef __RX_LITTLE_ENDIAN__
19193     unsigned char NFAEN : 1;
19194     unsigned char NFBEN : 1;
19195     unsigned char NFCEN : 1;
19196     unsigned char NFDEN : 1;
19197     unsigned char NFCS : 2;
19198     unsigned char : 2;
19199 #else
19200     unsigned char : 2;
19201     unsigned char NFCS : 2;

```

```

19202         unsigned char NFDEN : 1;
19203         unsigned char NFCEN : 1;
19204         unsigned char NFBEN : 1;
19205         unsigned char NFAEN : 1;
19206 #endif
19207     } BIT;
19208     } NFCR2;
19209     char          wk0[365];
19210     union {
19211         unsigned char BYTE;
19212         struct {
19213
19214 #ifdef __RX_LITTLE_ENDIAN__
19215         unsigned char TPSC : 3;
19216         unsigned char CKEG : 2;
19217         unsigned char CCLR : 2;
19218         unsigned char  : 1;
19219 #else
19220         unsigned char  : 1;
19221         unsigned char CCLR : 2;
19222         unsigned char CKEG : 2;
19223         unsigned char TPSC : 3;
19224 #endif
19225     } BIT;
19226     } TCR;
19227     union {
19228         unsigned char BYTE;
19229         struct {
19230
19231 #ifdef __RX_LITTLE_ENDIAN__
19232         unsigned char MD : 4;
19233         unsigned char  : 4;
19234 #else
19235         unsigned char  : 4;
19236         unsigned char MD : 4;
19237 #endif
19238     } BIT;
19239     } TMDR1;
19240     union {
19241         unsigned char BYTE;
19242         struct {
19243
19244 #ifdef __RX_LITTLE_ENDIAN__
19245         unsigned char IOA : 4;
19246         unsigned char IOB : 4;
19247 #else
19248         unsigned char IOB : 4;
19249         unsigned char IOA : 4;
19250 #endif
19251     } BIT;
19252     } TIOR;
19253     char          wk1[1];
19254     union {
19255         unsigned char BYTE;
19256         struct {
19257
19258 #ifdef __RX_LITTLE_ENDIAN__
19259         unsigned char TGIEA : 1;
19260         unsigned char TGIEB : 1;
19261         unsigned char  : 2;
19262         unsigned char TCIEV : 1;
19263         unsigned char TCIEU : 1;
19264         unsigned char  : 1;
19265         unsigned char TTGE : 1;
19266 #else
19267         unsigned char TTGE : 1;
19268         unsigned char  : 1;
19269         unsigned char TCIEU : 1;
19270         unsigned char TCIEV : 1;
19271         unsigned char  : 2;
19272         unsigned char TGIEB : 1;
19273         unsigned char TGIEA : 1;
19274 #endif
19275     } BIT;
19276     } TIER;
19277     union {
19278         unsigned char BYTE;
19279         struct {
19280
19281 #ifdef __RX_LITTLE_ENDIAN__
19282         unsigned char  : 7;
19283         unsigned char TCFD : 1;
19284 #else
19285         unsigned char TCFD : 1;
19286         unsigned char  : 7;
19287 #endif
19288     } BIT;

```

```

19289     } TSR;
19290     unsigned short TCNT;
19291     unsigned short TGRA;
19292     unsigned short TGRB;
19293     union {
19294         unsigned char BYTE;
19295         struct {
19296
19297 #ifdef __RX_LITTLE_ENDIAN__
19298         unsigned char TPSC2 : 3;
19299         unsigned char PCB : 2;
19300         unsigned char : 3;
19301 #else
19302         unsigned char : 3;
19303         unsigned char PCB : 2;
19304         unsigned char TPSC2 : 3;
19305 #endif
19306     } BIT;
19307     } TCR2;
19308 } st_mtu2_t;
19309
19310 typedef struct st_mtu3 {
19311     union {
19312         unsigned char BYTE;
19313         struct {
19314
19315 #ifdef __RX_LITTLE_ENDIAN__
19316         unsigned char TPSC : 3;
19317         unsigned char CKEG : 2;
19318         unsigned char CCLR : 3;
19319 #else
19320         unsigned char CCLR : 3;
19321         unsigned char CKEG : 2;
19322         unsigned char TPSC : 3;
19323 #endif
19324     } BIT;
19325     } TCR;
19326     char wk0[1];
19327     union {
19328         unsigned char BYTE;
19329         struct {
19330
19331 #ifdef __RX_LITTLE_ENDIAN__
19332         unsigned char MD : 4;
19333         unsigned char BFA : 1;
19334         unsigned char BFB : 1;
19335         unsigned char : 2;
19336 #else
19337         unsigned char : 2;
19338         unsigned char BFB : 1;
19339         unsigned char BFA : 1;
19340         unsigned char MD : 4;
19341 #endif
19342     } BIT;
19343     } TMDR1;
19344     char wk1[1];
19345     union {
19346         unsigned char BYTE;
19347         struct {
19348
19349 #ifdef __RX_LITTLE_ENDIAN__
19350         unsigned char IOA : 4;
19351         unsigned char IOB : 4;
19352 #else
19353         unsigned char IOB : 4;
19354         unsigned char IOA : 4;
19355 #endif
19356     } BIT;
19357     } TIORH;
19358     union {
19359         unsigned char BYTE;
19360         struct {
19361
19362 #ifdef __RX_LITTLE_ENDIAN__
19363         unsigned char IOC : 4;
19364         unsigned char IOD : 4;
19365 #else
19366         unsigned char IOD : 4;
19367         unsigned char IOC : 4;
19368 #endif
19369     } BIT;
19370     } TIORL;
19371     char wk2[2];
19372     union {
19373         unsigned char BYTE;
19374         struct {
19375

```

```

19376 #ifndef __RX_LITTLE_ENDIAN__
19377     unsigned char TGIEA : 1;
19378     unsigned char TGIEB : 1;
19379     unsigned char TGIEC : 1;
19380     unsigned char TGIED : 1;
19381     unsigned char TCIEV : 1;
19382     unsigned char : 2;
19383     unsigned char TTGE : 1;
19384 #else
19385     unsigned char TTGE : 1;
19386     unsigned char : 2;
19387     unsigned char TCIEV : 1;
19388     unsigned char TGIED : 1;
19389     unsigned char TGIEC : 1;
19390     unsigned char TGIEB : 1;
19391     unsigned char TGIEA : 1;
19392 #endif
19393 } BIT;
19394 } TIER;
19395 char      wk3[7];
19396 unsigned short TCNT;
19397 char      wk4[6];
19398 unsigned short TGRA;
19399 unsigned short TGRB;
19400 char      wk5[8];
19401 unsigned short TGRC;
19402 unsigned short TGRD;
19403 char      wk6[4];
19404 union {
19405     unsigned char BYTE;
19406     struct {
19407
19408 #ifndef __RX_LITTLE_ENDIAN__
19409     unsigned char : 7;
19410     unsigned char TCFD : 1;
19411 #else
19412     unsigned char TCFD : 1;
19413     unsigned char : 7;
19414 #endif
19415     } BIT;
19416     } TSR;
19417 char      wk7[11];
19418 union {
19419     unsigned char BYTE;
19420     struct {
19421
19422 #ifndef __RX_LITTLE_ENDIAN__
19423     unsigned char TTSA : 1;
19424     unsigned char TTSB : 1;
19425     unsigned char : 6;
19426 #else
19427     unsigned char : 6;
19428     unsigned char TTSB : 1;
19429     unsigned char TTSA : 1;
19430 #endif
19431     } BIT;
19432     } TBTM;
19433 char      wk8[19];
19434 union {
19435     unsigned char BYTE;
19436     struct {
19437
19438 #ifndef __RX_LITTLE_ENDIAN__
19439     unsigned char TPSC2 : 3;
19440     unsigned char : 5;
19441 #else
19442     unsigned char : 5;
19443     unsigned char TPSC2 : 3;
19444 #endif
19445     } BIT;
19446     } TCR2;
19447 char      wk9[37];
19448 unsigned short TGRE;
19449 char      wk10[31];
19450 union {
19451     unsigned char BYTE;
19452     struct {
19453
19454 #ifndef __RX_LITTLE_ENDIAN__
19455     unsigned char NFAEN : 1;
19456     unsigned char NFBEN : 1;
19457     unsigned char NFCEN : 1;
19458     unsigned char NFDEN : 1;
19459     unsigned char NFCS : 2;
19460     unsigned char : 2;
19461 #else
19462     unsigned char : 2;

```

```
19463         unsigned char NFCS : 2;
19464         unsigned char NFDEN : 1;
19465         unsigned char NFCEN : 1;
19466         unsigned char NFBEN : 1;
19467         unsigned char NFAEN : 1;
19468     #endif
19469     } BIT;
19470     } NFCR3;
19471 } st_mtu3_t;
19472
19473 typedef struct st_mtu4 {
19474     char          wk0[1];
19475     union {
19476         unsigned char BYTE;
19477         struct {
19478
19479     #ifdef __RX_LITTLE_ENDIAN__
19480         unsigned char TPSC : 3;
19481         unsigned char CKEG : 2;
19482         unsigned char CCLR : 3;
19483     #else
19484         unsigned char CCLR : 3;
19485         unsigned char CKEG : 2;
19486         unsigned char TPSC : 3;
19487     #endif
19488     } BIT;
19489     } TCR;
19490     char          wk1[1];
19491     union {
19492         unsigned char BYTE;
19493         struct {
19494
19495     #ifdef __RX_LITTLE_ENDIAN__
19496         unsigned char MD : 4;
19497         unsigned char BFA : 1;
19498         unsigned char BFB : 1;
19499         unsigned char  : 2;
19500     #else
19501         unsigned char  : 2;
19502         unsigned char BFB : 1;
19503         unsigned char BFA : 1;
19504         unsigned char MD : 4;
19505     #endif
19506     } BIT;
19507     } TMDR1;
19508     char          wk2[2];
19509     union {
19510         unsigned char BYTE;
19511         struct {
19512
19513     #ifdef __RX_LITTLE_ENDIAN__
19514         unsigned char IOA : 4;
19515         unsigned char IOB : 4;
19516     #else
19517         unsigned char IOB : 4;
19518         unsigned char IOA : 4;
19519     #endif
19520     } BIT;
19521     } TIORH;
19522     union {
19523         unsigned char BYTE;
19524         struct {
19525
19526     #ifdef __RX_LITTLE_ENDIAN__
19527         unsigned char IOC : 4;
19528         unsigned char IOD : 4;
19529     #else
19530         unsigned char IOD : 4;
19531         unsigned char IOC : 4;
19532     #endif
19533     } BIT;
19534     } TIORL;
19535     char          wk3[1];
19536     union {
19537         unsigned char BYTE;
19538         struct {
19539
19540     #ifdef __RX_LITTLE_ENDIAN__
19541         unsigned char TGIEA : 1;
19542         unsigned char TGIEB : 1;
19543         unsigned char TGIEC : 1;
19544         unsigned char TGIED : 1;
19545         unsigned char TCIEV : 1;
19546         unsigned char  : 1;
19547         unsigned char TTGE2 : 1;
19548         unsigned char TTGE : 1;
19549     #else
```

```

19550         unsigned char TTGE : 1;
19551         unsigned char TTGE2 : 1;
19552         unsigned char : 1;
19553         unsigned char TCIEV : 1;
19554         unsigned char TGIED : 1;
19555         unsigned char TGIEC : 1;
19556         unsigned char TGIEB : 1;
19557         unsigned char TGIEA : 1;
19558     #endif
19559     } BIT;
19560     } TIER;
19561     char          wk4[8];
19562     unsigned short TCNT;
19563     char          wk5[8];
19564     unsigned short TGRA;
19565     unsigned short TGRB;
19566     char          wk6[8];
19567     unsigned short TGRC;
19568     unsigned short TGRD;
19569     char          wk7[1];
19570     union {
19571         unsigned char BYTE;
19572     struct {
19573
19574     #ifdef __RX_LITTLE_ENDIAN__
19575         unsigned char : 7;
19576         unsigned char TCFD : 1;
19577     #else
19578         unsigned char TCFD : 1;
19579         unsigned char : 7;
19580     #endif
19581     } BIT;
19582     } TSR;
19583     char          wk8[11];
19584     union {
19585         unsigned char BYTE;
19586     struct {
19587
19588     #ifdef __RX_LITTLE_ENDIAN__
19589         unsigned char TTSA : 1;
19590         unsigned char TTSB : 1;
19591         unsigned char : 6;
19592     #else
19593         unsigned char : 6;
19594         unsigned char TTSB : 1;
19595         unsigned char TTSA : 1;
19596     #endif
19597     } BIT;
19598     } TBTM;
19599     char          wk9[6];
19600     union {
19601         unsigned short WORD;
19602     struct {
19603
19604     #ifdef __RX_LITTLE_ENDIAN__
19605         unsigned short ITB4VE : 1;
19606         unsigned short ITB3AE : 1;
19607         unsigned short ITA4VE : 1;
19608         unsigned short ITA3AE : 1;
19609         unsigned short DT4BE : 1;
19610         unsigned short UT4BE : 1;
19611         unsigned short DT4AE : 1;
19612         unsigned short UT4AE : 1;
19613         unsigned short : 6;
19614         unsigned short BF : 2;
19615     #else
19616         unsigned short BF : 2;
19617         unsigned short : 6;
19618         unsigned short UT4AE : 1;
19619         unsigned short DT4AE : 1;
19620         unsigned short UT4BE : 1;
19621         unsigned short DT4BE : 1;
19622         unsigned short ITA3AE : 1;
19623         unsigned short ITA4VE : 1;
19624         unsigned short ITB3AE : 1;
19625         unsigned short ITB4VE : 1;
19626     #endif
19627     } BIT;
19628     } TADCR;
19629     char          wk10[2];
19630     unsigned short TADCORA;
19631     unsigned short TADCORB;
19632     unsigned short TADCOBRA;
19633     unsigned short TADCOBRB;
19634     char          wk11[1];
19635     union {
19636         unsigned char BYTE;

```

```

19637     struct {
19638
19639 #ifdef __RX_LITTLE_ENDIAN__
19640     unsigned char TPSC2 : 3;
19641     unsigned char : 5;
19642 #else
19643     unsigned char : 5;
19644     unsigned char TPSC2 : 3;
19645 #endif
19646     } BIT;
19647     } TCR2;
19648     char wk12[38];
19649     unsigned short TGRE;
19650     unsigned short TGRF;
19651     char wk13[28];
19652     union {
19653         unsigned char BYTE;
19654         struct {
19655
19656 #ifdef __RX_LITTLE_ENDIAN__
19657         unsigned char NFAEN : 1;
19658         unsigned char NFBEN : 1;
19659         unsigned char NFCEN : 1;
19660         unsigned char NFDEN : 1;
19661         unsigned char NFCS : 2;
19662         unsigned char : 2;
19663 #else
19664         unsigned char : 2;
19665         unsigned char NFCS : 2;
19666         unsigned char NFDEN : 1;
19667         unsigned char NFCEN : 1;
19668         unsigned char NFBEN : 1;
19669         unsigned char NFAEN : 1;
19670 #endif
19671         } BIT;
19672         } NFCR4;
19673 } st_mtu4_t;
19674
19675 typedef struct st_mtu5 {
19676     char wk0[1];
19677     union {
19678         unsigned char BYTE;
19679         struct {
19680
19681 #ifdef __RX_LITTLE_ENDIAN__
19682         unsigned char NFUEN : 1;
19683         unsigned char NFVEN : 1;
19684         unsigned char NFWEN : 1;
19685         unsigned char : 1;
19686         unsigned char NFCS : 2;
19687         unsigned char : 2;
19688 #else
19689         unsigned char : 2;
19690         unsigned char NFCS : 2;
19691         unsigned char : 1;
19692         unsigned char NFWEN : 1;
19693         unsigned char NFVEN : 1;
19694         unsigned char NFUEN : 1;
19695 #endif
19696         } BIT;
19697         } NFCR5;
19698     char wk1[490];
19699     unsigned short TCNTU;
19700     unsigned short TGRU;
19701     union {
19702         unsigned char BYTE;
19703         struct {
19704
19705 #ifdef __RX_LITTLE_ENDIAN__
19706         unsigned char TPSC : 2;
19707         unsigned char : 6;
19708 #else
19709         unsigned char : 6;
19710         unsigned char TPSC : 2;
19711 #endif
19712         } BIT;
19713         } TCRU;
19714     union {
19715         unsigned char BYTE;
19716         struct {
19717
19718 #ifdef __RX_LITTLE_ENDIAN__
19719         unsigned char TPSC2 : 3;
19720         unsigned char CKEG : 2;
19721         unsigned char : 3;
19722 #else
19723         unsigned char : 3;

```

```

19724         unsigned char CKEG : 2;
19725         unsigned char TPSC2 : 3;
19726     #endif
19727     } BIT;
19728     } TCR2U;
19729     union {
19730         unsigned char BYTE;
19731         struct {
19732
19733     #ifdef __RX_LITTLE_ENDIAN__
19734         unsigned char IOC : 5;
19735         unsigned char : 3;
19736     #else
19737         unsigned char : 3;
19738         unsigned char IOC : 5;
19739     #endif
19740     } BIT;
19741     } TIORU;
19742     char          wk2[9];
19743     unsigned short TCNTV;
19744     unsigned short TGRV;
19745     union {
19746         unsigned char BYTE;
19747         struct {
19748
19749     #ifdef __RX_LITTLE_ENDIAN__
19750         unsigned char TPSC : 2;
19751         unsigned char : 6;
19752     #else
19753         unsigned char : 6;
19754         unsigned char TPSC : 2;
19755     #endif
19756     } BIT;
19757     } TCRV;
19758     union {
19759         unsigned char BYTE;
19760         struct {
19761
19762     #ifdef __RX_LITTLE_ENDIAN__
19763         unsigned char TPSC2 : 3;
19764         unsigned char CKEG : 2;
19765         unsigned char : 3;
19766     #else
19767         unsigned char : 3;
19768         unsigned char CKEG : 2;
19769         unsigned char TPSC2 : 3;
19770     #endif
19771     } BIT;
19772     } TCR2V;
19773     union {
19774         unsigned char BYTE;
19775         struct {
19776
19777     #ifdef __RX_LITTLE_ENDIAN__
19778         unsigned char IOC : 5;
19779         unsigned char : 3;
19780     #else
19781         unsigned char : 3;
19782         unsigned char IOC : 5;
19783     #endif
19784     } BIT;
19785     } TIORV;
19786     char          wk3[9];
19787     unsigned short TCNTW;
19788     unsigned short TGRW;
19789     union {
19790         unsigned char BYTE;
19791         struct {
19792
19793     #ifdef __RX_LITTLE_ENDIAN__
19794         unsigned char TPSC : 2;
19795         unsigned char : 6;
19796     #else
19797         unsigned char : 6;
19798         unsigned char TPSC : 2;
19799     #endif
19800     } BIT;
19801     } TCRW;
19802     union {
19803         unsigned char BYTE;
19804         struct {
19805
19806     #ifdef __RX_LITTLE_ENDIAN__
19807         unsigned char TPSC2 : 3;
19808         unsigned char CKEG : 2;
19809         unsigned char : 3;
19810     #else

```

```

19811         unsigned char : 3;
19812         unsigned char CKEG : 2;
19813         unsigned char TPSC2 : 3;
19814     #endif
19815     } BIT;
19816     } TCR2W;
19817     union {
19818         unsigned char BYTE;
19819         struct {
19820
19821     #ifdef __RX_LITTLE_ENDIAN__
19822         unsigned char IOC : 5;
19823         unsigned char : 3;
19824     #else
19825         unsigned char : 3;
19826         unsigned char IOC : 5;
19827     #endif
19828     } BIT;
19829     } TIORW;
19830     char wk4[11];
19831     union {
19832         unsigned char BYTE;
19833         struct {
19834
19835     #ifdef __RX_LITTLE_ENDIAN__
19836         unsigned char TGIE5W : 1;
19837         unsigned char TGIE5V : 1;
19838         unsigned char TGIE5U : 1;
19839         unsigned char : 5;
19840     #else
19841         unsigned char : 5;
19842         unsigned char TGIE5U : 1;
19843         unsigned char TGIE5V : 1;
19844         unsigned char TGIE5W : 1;
19845     #endif
19846     } BIT;
19847     } TIER;
19848     char wk5[1];
19849     union {
19850         unsigned char BYTE;
19851         struct {
19852
19853     #ifdef __RX_LITTLE_ENDIAN__
19854         unsigned char CSTW5 : 1;
19855         unsigned char CSTV5 : 1;
19856         unsigned char CSTU5 : 1;
19857         unsigned char : 5;
19858     #else
19859         unsigned char : 5;
19860         unsigned char CSTU5 : 1;
19861         unsigned char CSTV5 : 1;
19862         unsigned char CSTW5 : 1;
19863     #endif
19864     } BIT;
19865     } TSTR;
19866     char wk6[1];
19867     union {
19868         unsigned char BYTE;
19869         struct {
19870
19871     #ifdef __RX_LITTLE_ENDIAN__
19872         unsigned char CMPCLR5W : 1;
19873         unsigned char CMPCLR5V : 1;
19874         unsigned char CMPCLR5U : 1;
19875         unsigned char : 5;
19876     #else
19877         unsigned char : 5;
19878         unsigned char CMPCLR5U : 1;
19879         unsigned char CMPCLR5V : 1;
19880         unsigned char CMPCLR5W : 1;
19881     #endif
19882     } BIT;
19883     } TCNTCMPCLR;
19884 } st_mtu5_t;
19885
19886 typedef struct st_mtu6 {
19887     union {
19888         unsigned char BYTE;
19889         struct {
19890
19891     #ifdef __RX_LITTLE_ENDIAN__
19892         unsigned char TPSC : 3;
19893         unsigned char CKEG : 2;
19894         unsigned char CCLR : 3;
19895     #else
19896         unsigned char CCLR : 3;
19897         unsigned char CKEG : 2;

```

```

19898         unsigned char TPSC : 3;
19899 #endif
19900     } BIT;
19901     } TCR;
19902     char          wk0[1];
19903     union {
19904         unsigned char BYTE;
19905         struct {
19906
19907 #ifdef __RX_LITTLE_ENDIAN__
19908         unsigned char MD : 4;
19909         unsigned char BFA : 1;
19910         unsigned char BFB : 1;
19911         unsigned char  : 2;
19912 #else
19913         unsigned char  : 2;
19914         unsigned char BFB : 1;
19915         unsigned char BFA : 1;
19916         unsigned char MD : 4;
19917 #endif
19918     } BIT;
19919     } TMDR1;
19920     char          wk1[1];
19921     union {
19922         unsigned char BYTE;
19923         struct {
19924
19925 #ifdef __RX_LITTLE_ENDIAN__
19926         unsigned char IOA : 4;
19927         unsigned char IOB : 4;
19928 #else
19929         unsigned char IOB : 4;
19930         unsigned char IOA : 4;
19931 #endif
19932     } BIT;
19933     } TIORH;
19934     union {
19935         unsigned char BYTE;
19936         struct {
19937
19938 #ifdef __RX_LITTLE_ENDIAN__
19939         unsigned char IOC : 4;
19940         unsigned char IOD : 4;
19941 #else
19942         unsigned char IOD : 4;
19943         unsigned char IOC : 4;
19944 #endif
19945     } BIT;
19946     } TIORL;
19947     char          wk2[2];
19948     union {
19949         unsigned char BYTE;
19950         struct {
19951
19952 #ifdef __RX_LITTLE_ENDIAN__
19953         unsigned char TGIEA : 1;
19954         unsigned char TGIEB : 1;
19955         unsigned char TGIEC : 1;
19956         unsigned char TGIED : 1;
19957         unsigned char TCIEV : 1;
19958         unsigned char  : 2;
19959         unsigned char TTGE : 1;
19960 #else
19961         unsigned char TTGE : 1;
19962         unsigned char  : 2;
19963         unsigned char TCIEV : 1;
19964         unsigned char TGIED : 1;
19965         unsigned char TGIEC : 1;
19966         unsigned char TGIEB : 1;
19967         unsigned char TGIEA : 1;
19968 #endif
19969     } BIT;
19970     } TIER;
19971     char          wk3[7];
19972     unsigned short TCNT;
19973     char          wk4[6];
19974     unsigned short TGRA;
19975     unsigned short TGRB;
19976     char          wk5[8];
19977     unsigned short TGRC;
19978     unsigned short TGRD;
19979     char          wk6[4];
19980     union {
19981         unsigned char BYTE;
19982         struct {
19983
19984 #ifdef __RX_LITTLE_ENDIAN__

```

```

19985         unsigned char : 7;
19986         unsigned char TCFD : 1;
19987 #else
19988         unsigned char TCFD : 1;
19989         unsigned char : 7;
19990 #endif
19991     } BIT;
19992     } TSR;
19993     char          wk7[11];
19994     union {
19995         unsigned char BYTE;
19996         struct {
19997
19998 #ifdef __RX_LITTLE_ENDIAN__
19999         unsigned char TTSA : 1;
20000         unsigned char TTSB : 1;
20001         unsigned char : 6;
20002 #else
20003         unsigned char : 6;
20004         unsigned char TTSB : 1;
20005         unsigned char TTSA : 1;
20006 #endif
20007     } BIT;
20008     } TBTM;
20009     char          wk8[19];
20010     union {
20011         unsigned char BYTE;
20012         struct {
20013
20014 #ifdef __RX_LITTLE_ENDIAN__
20015         unsigned char TPSC2 : 3;
20016         unsigned char : 5;
20017 #else
20018         unsigned char : 5;
20019         unsigned char TPSC2 : 3;
20020 #endif
20021     } BIT;
20022     } TCR2;
20023     char          wk9[3];
20024     union {
20025         unsigned char BYTE;
20026         struct {
20027
20028 #ifdef __RX_LITTLE_ENDIAN__
20029         unsigned char CE2B : 1;
20030         unsigned char CE2A : 1;
20031         unsigned char CE1B : 1;
20032         unsigned char CE1A : 1;
20033         unsigned char CE0D : 1;
20034         unsigned char CE0C : 1;
20035         unsigned char CE0B : 1;
20036         unsigned char CE0A : 1;
20037 #else
20038         unsigned char CE0A : 1;
20039         unsigned char CE0B : 1;
20040         unsigned char CE0C : 1;
20041         unsigned char CE0D : 1;
20042         unsigned char CE1A : 1;
20043         unsigned char CE1B : 1;
20044         unsigned char CE2A : 1;
20045         unsigned char CE2B : 1;
20046 #endif
20047     } BIT;
20048     } TSYCR;
20049     char          wk10[33];
20050     unsigned short TGRE;
20051     char          wk11[31];
20052     union {
20053         unsigned char BYTE;
20054         struct {
20055
20056 #ifdef __RX_LITTLE_ENDIAN__
20057         unsigned char NFAEN : 1;
20058         unsigned char NFBEN : 1;
20059         unsigned char NFCEN : 1;
20060         unsigned char NFDEN : 1;
20061         unsigned char NFCS : 2;
20062         unsigned char : 2;
20063 #else
20064         unsigned char : 2;
20065         unsigned char NFCS : 2;
20066         unsigned char NFDEN : 1;
20067         unsigned char NFCEN : 1;
20068         unsigned char NFBEN : 1;
20069         unsigned char NFAEN : 1;
20070 #endif
20071     } BIT;

```

```

20072     } NFCR6;
20073 } st_mtu6_t;
20074
20075 typedef struct st_mtu7 {
20076     char        wk0[1];
20077     union {
20078         unsigned char BYTE;
20079     } struct {
20080
20081 #ifdef __RX_LITTLE_ENDIAN__
20082         unsigned char TPSC : 3;
20083         unsigned char CKEG : 2;
20084         unsigned char CCLR : 3;
20085 #else
20086         unsigned char CCLR : 3;
20087         unsigned char CKEG : 2;
20088         unsigned char TPSC : 3;
20089 #endif
20090     } BIT;
20091     } TCR;
20092     char        wk1[1];
20093     union {
20094         unsigned char BYTE;
20095     } struct {
20096
20097 #ifdef __RX_LITTLE_ENDIAN__
20098         unsigned char MD : 4;
20099         unsigned char BFA : 1;
20100         unsigned char BFB : 1;
20101         unsigned char  : 2;
20102 #else
20103         unsigned char  : 2;
20104         unsigned char BFB : 1;
20105         unsigned char BFA : 1;
20106         unsigned char MD : 4;
20107 #endif
20108     } BIT;
20109     } TMDR1;
20110     char        wk2[2];
20111     union {
20112         unsigned char BYTE;
20113     } struct {
20114
20115 #ifdef __RX_LITTLE_ENDIAN__
20116         unsigned char IOA : 4;
20117         unsigned char IOB : 4;
20118 #else
20119         unsigned char IOB : 4;
20120         unsigned char IOA : 4;
20121 #endif
20122     } BIT;
20123     } TIORH;
20124     union {
20125         unsigned char BYTE;
20126     } struct {
20127
20128 #ifdef __RX_LITTLE_ENDIAN__
20129         unsigned char IOC : 4;
20130         unsigned char IOD : 4;
20131 #else
20132         unsigned char IOD : 4;
20133         unsigned char IOC : 4;
20134 #endif
20135     } BIT;
20136     } TIORL;
20137     char        wk3[1];
20138     union {
20139         unsigned char BYTE;
20140     } struct {
20141
20142 #ifdef __RX_LITTLE_ENDIAN__
20143         unsigned char TGIEA : 1;
20144         unsigned char TGIEB : 1;
20145         unsigned char TGIEC : 1;
20146         unsigned char TGIED : 1;
20147         unsigned char TCIEV : 1;
20148         unsigned char  : 1;
20149         unsigned char TTGE2 : 1;
20150         unsigned char TTGE : 1;
20151 #else
20152         unsigned char TTGE : 1;
20153         unsigned char TTGE2 : 1;
20154         unsigned char  : 1;
20155         unsigned char TCIEV : 1;
20156         unsigned char TGIED : 1;
20157         unsigned char TGIEC : 1;
20158         unsigned char TGIEB : 1;

```

```

20159         unsigned char TGIEA : 1;
20160 #endif
20161     } BIT;
20162     } TIER;
20163     char        wk4[8];
20164     unsigned short TCNT;
20165     char        wk5[8];
20166     unsigned short TGRA;
20167     unsigned short TGRB;
20168     char        wk6[8];
20169     unsigned short TGRC;
20170     unsigned short TGRD;
20171     char        wk7[1];
20172     union {
20173         unsigned char BYTE;
20174         struct {
20175
20176 #ifdef __RX_LITTLE_ENDIAN__
20177         unsigned char : 7;
20178         unsigned char TCFD : 1;
20179 #else
20180         unsigned char TCFD : 1;
20181         unsigned char : 7;
20182 #endif
20183     } BIT;
20184     } TSR;
20185     char        wk8[11];
20186     union {
20187         unsigned char BYTE;
20188         struct {
20189
20190 #ifdef __RX_LITTLE_ENDIAN__
20191         unsigned char TTSA : 1;
20192         unsigned char TTSA : 1;
20193         unsigned char : 6;
20194 #else
20195         unsigned char : 6;
20196         unsigned char TTSA : 1;
20197         unsigned char : 6;
20198 #endif
20199     } BIT;
20200     } TBTM;
20201     char        wk9[6];
20202     union {
20203         unsigned short WORD;
20204         struct {
20205
20206 #ifdef __RX_LITTLE_ENDIAN__
20207         unsigned short ITB7VE : 1;
20208         unsigned short ITB6AE : 1;
20209         unsigned short ITA7VE : 1;
20210         unsigned short ITA6AE : 1;
20211         unsigned short DT7BE : 1;
20212         unsigned short UT7BE : 1;
20213         unsigned short DT7AE : 1;
20214         unsigned short UT7AE : 1;
20215         unsigned short : 6;
20216         unsigned short BF : 2;
20217 #else
20218         unsigned short BF : 2;
20219         unsigned short : 6;
20220         unsigned short UT7AE : 1;
20221         unsigned short DT7AE : 1;
20222         unsigned short UT7BE : 1;
20223         unsigned short DT7BE : 1;
20224         unsigned short ITA6AE : 1;
20225         unsigned short ITA7VE : 1;
20226         unsigned short ITB6AE : 1;
20227         unsigned short ITB7VE : 1;
20228 #endif
20229     } BIT;
20230     } TADCR;
20231     char        wk10[2];
20232     unsigned short TADCORA;
20233     unsigned short TADCORB;
20234     unsigned short TADCOBRA;
20235     unsigned short TADCOBRB;
20236     char        wk11[1];
20237     union {
20238         unsigned char BYTE;
20239         struct {
20240
20241 #ifdef __RX_LITTLE_ENDIAN__
20242         unsigned char TPSC2 : 3;
20243         unsigned char : 5;
20244 #else
20245         unsigned char : 5;

```

```

20246         unsigned char TPSC2 : 3;
20247 #endif
20248     } BIT;
20249     } TCR2;
20250     char        wk12[38];
20251     unsigned short TGRE;
20252     unsigned short TGRF;
20253     char        wk13[28];
20254     union {
20255         unsigned char BYTE;
20256         struct {
20257
20258 #ifdef __RX_LITTLE_ENDIAN__
20259         unsigned char NFAEN : 1;
20260         unsigned char NFBEN : 1;
20261         unsigned char NFCEN : 1;
20262         unsigned char NFDEN : 1;
20263         unsigned char NFCS : 2;
20264         unsigned char      : 2;
20265 #else
20266         unsigned char      : 2;
20267         unsigned char NFCS : 2;
20268         unsigned char NFDEN : 1;
20269         unsigned char NFCEN : 1;
20270         unsigned char NFBEN : 1;
20271         unsigned char NFAEN : 1;
20272 #endif
20273     } BIT;
20274     } NFCR7;
20275 } st_mtu7_t;
20276
20277 typedef struct st_mtu8 {
20278     union {
20279         unsigned char BYTE;
20280         struct {
20281
20282 #ifdef __RX_LITTLE_ENDIAN__
20283         unsigned char NFAEN : 1;
20284         unsigned char NFBEN : 1;
20285         unsigned char NFCEN : 1;
20286         unsigned char NFDEN : 1;
20287         unsigned char NFCS : 2;
20288         unsigned char      : 2;
20289 #else
20290         unsigned char      : 2;
20291         unsigned char NFCS : 2;
20292         unsigned char NFDEN : 1;
20293         unsigned char NFCEN : 1;
20294         unsigned char NFBEN : 1;
20295         unsigned char NFAEN : 1;
20296 #endif
20297     } BIT;
20298     } NFCR8;
20299     char        wk0[871];
20300     union {
20301         unsigned char BYTE;
20302         struct {
20303
20304 #ifdef __RX_LITTLE_ENDIAN__
20305         unsigned char TPSC : 3;
20306         unsigned char CKEG : 2;
20307         unsigned char CCLR : 3;
20308 #else
20309         unsigned char CCLR : 3;
20310         unsigned char CKEG : 2;
20311         unsigned char TPSC : 3;
20312 #endif
20313     } BIT;
20314     } TCR;
20315     union {
20316         unsigned char BYTE;
20317         struct {
20318
20319 #ifdef __RX_LITTLE_ENDIAN__
20320         unsigned char MD : 4;
20321         unsigned char BFA : 1;
20322         unsigned char BFB : 1;
20323         unsigned char      : 2;
20324 #else
20325         unsigned char      : 2;
20326         unsigned char BFB : 1;
20327         unsigned char BFA : 1;
20328         unsigned char MD : 4;
20329 #endif
20330     } BIT;
20331     } TMDR1;
20332     union {

```

```

20333     unsigned char BYTE;
20334     struct {
20335
20336 #ifdef __RX_LITTLE_ENDIAN__
20337     unsigned char IOA : 4;
20338     unsigned char IOB : 4;
20339 #else
20340     unsigned char IOB : 4;
20341     unsigned char IOA : 4;
20342 #endif
20343     } BIT;
20344     } TIORH;
20345     union {
20346     unsigned char BYTE;
20347     struct {
20348
20349 #ifdef __RX_LITTLE_ENDIAN__
20350     unsigned char IOC : 4;
20351     unsigned char IOD : 4;
20352 #else
20353     unsigned char IOD : 4;
20354     unsigned char IOC : 4;
20355 #endif
20356     } BIT;
20357     } TIORL;
20358     union {
20359     unsigned char BYTE;
20360     struct {
20361
20362 #ifdef __RX_LITTLE_ENDIAN__
20363     unsigned char TGIEA : 1;
20364     unsigned char TGIEB : 1;
20365     unsigned char TGIEC : 1;
20366     unsigned char TGIED : 1;
20367     unsigned char TCIEV : 1;
20368     unsigned char   : 3;
20369 #else
20370     unsigned char   : 3;
20371     unsigned char TCIEV : 1;
20372     unsigned char TGIED : 1;
20373     unsigned char TGIEC : 1;
20374     unsigned char TGIEB : 1;
20375     unsigned char TGIEA : 1;
20376 #endif
20377     } BIT;
20378     } TIER;
20379     char          wk1[1];
20380     union {
20381     unsigned char BYTE;
20382     struct {
20383
20384 #ifdef __RX_LITTLE_ENDIAN__
20385     unsigned char TPSC2 : 3;
20386     unsigned char   : 5;
20387 #else
20388     unsigned char   : 5;
20389     unsigned char TPSC2 : 3;
20390 #endif
20391     } BIT;
20392     } TCR2;
20393     char          wk2[1];
20394     unsigned long TCNT;
20395     unsigned long TGRA;
20396     unsigned long TGRB;
20397     unsigned long TGRC;
20398     unsigned long TGRD;
20399 } st_mtu8_t;
20400
20401 typedef struct st_ofsm {
20402     union {
20403     unsigned long LONG;
20404     struct {
20405
20406 #ifdef __RX_LITTLE_ENDIAN__
20407     unsigned long MDE : 3;
20408     unsigned long   : 1;
20409     unsigned long BANKMD : 3;
20410     unsigned long   : 25;
20411 #else
20412     unsigned long   : 25;
20413     unsigned long BANKMD : 3;
20414     unsigned long   : 1;
20415     unsigned long MDE : 3;
20416 #endif
20417     } BIT;
20418     } MDE;
20419     union {

```

```

20420 unsigned long LONG;
20421 struct {
20422
20423 #ifdef __RX_LITTLE_ENDIAN__
20424     unsigned long : 1;
20425     unsigned long IWDTSTRT : 1;
20426     unsigned long IWDTTOPS : 2;
20427     unsigned long IWDTCKS : 4;
20428     unsigned long IWDTRPES : 2;
20429     unsigned long IWDTRPSS : 2;
20430     unsigned long IWDTRSTIRQS : 1;
20431     unsigned long : 1;
20432     unsigned long IWDTSLCSTP : 1;
20433     unsigned long : 2;
20434     unsigned long WDTSTRT : 1;
20435     unsigned long WDTTOPS : 2;
20436     unsigned long WDTCKS : 4;
20437     unsigned long WDRTPES : 2;
20438     unsigned long WDTRPSS : 2;
20439     unsigned long WDTRSTIRQS : 1;
20440     unsigned long : 3;
20441 #else
20442     unsigned long : 3;
20443     unsigned long WDRTRSTIRQS : 1;
20444     unsigned long WDTRPSS : 2;
20445     unsigned long WDRTPES : 2;
20446     unsigned long WDTCKS : 4;
20447     unsigned long WDTTOPS : 2;
20448     unsigned long WDTSTRT : 1;
20449     unsigned long : 2;
20450     unsigned long IWDTSLCSTP : 1;
20451     unsigned long : 1;
20452     unsigned long IWDTRSTIRQS : 1;
20453     unsigned long IWDTRPSS : 2;
20454     unsigned long IWDTRPES : 2;
20455     unsigned long IWDTCKS : 4;
20456     unsigned long IWDTTOPS : 2;
20457     unsigned long IWDTSTRT : 1;
20458     unsigned long : 1;
20459 #endif
20460 } BIT;
20461 } OFS0;
20462 union {
20463     unsigned long LONG;
20464     struct {
20465
20466 #ifdef __RX_LITTLE_ENDIAN__
20467     unsigned long VDSEL : 2;
20468     unsigned long LVDAS : 1;
20469     unsigned long : 5;
20470     unsigned long HOCOEN : 1;
20471     unsigned long : 23;
20472 #else
20473     unsigned long : 23;
20474     unsigned long HOCOEN : 1;
20475     unsigned long : 5;
20476     unsigned long LVDAS : 1;
20477     unsigned long VDSEL : 2;
20478 #endif
20479 } BIT;
20480 } OFS1;
20481 char wk0[4];
20482 unsigned long TMINF;
20483 char wk1[12];
20484 union {
20485     unsigned long LONG;
20486     struct {
20487
20488 #ifdef __RX_LITTLE_ENDIAN__
20489     unsigned long BANKSWP : 3;
20490     unsigned long : 29;
20491 #else
20492     unsigned long : 29;
20493     unsigned long BANKSWP : 3;
20494 #endif
20495 } BIT;
20496 } BANKSEL;
20497 char wk2[28];
20498 union {
20499     unsigned long LONG;
20500     struct {
20501
20502 #ifdef __RX_LITTLE_ENDIAN__
20503     unsigned long : 27;
20504     unsigned long SPE : 1;
20505     unsigned long : 4;
20506 #else

```

```
20507         unsigned long : 4;
20508         unsigned long SPE : 1;
20509         unsigned long : 27;
20510 #endif
20511     } BIT;
20512     } SPCC;
20513     char          wk3[4];
20514     union {
20515         unsigned long LONG;
20516         struct {
20517
20518 #ifdef __RX_LITTLE_ENDIAN__
20519         unsigned long : 24;
20520         unsigned long TMEF : 3;
20521         unsigned long : 1;
20522         unsigned long TMEFDB : 3;
20523         unsigned long : 1;
20524 #else
20525         unsigned long : 1;
20526         unsigned long TMEFDB : 3;
20527         unsigned long : 1;
20528         unsigned long TMEF : 3;
20529         unsigned long : 24;
20530 #endif
20531     } BIT;
20532     } TMEF;
20533     char          wk4[4];
20534     union {
20535         struct {
20536             unsigned long ID4:8;
20537             unsigned long ID3:8;
20538             unsigned long ID2:8;
20539             unsigned long ID1:8;
20540             unsigned long ID8:8;
20541             unsigned long ID7:8;
20542             unsigned long ID6:8;
20543             unsigned long ID5:8;
20544             unsigned long ID12:8;
20545             unsigned long ID11:8;
20546             unsigned long ID10:8;
20547             unsigned long ID9:8;
20548             unsigned long ID16:8;
20549             unsigned long ID15:8;
20550             unsigned long ID14:8;
20551             unsigned long ID13:8;
20552         } BIT;
20553     } OSIS;
20554     char          wk5[4];
20555     union {
20556         unsigned long LONG;
20557         struct {
20558
20559 #ifdef __RX_LITTLE_ENDIAN__
20560         unsigned long FAWS : 12;
20561         unsigned long : 3;
20562         unsigned long FSPR : 1;
20563         unsigned long FAWF : 12;
20564         unsigned long : 3;
20565         unsigned long BTFLG : 1;
20566 #else
20567         unsigned long BTFLG : 1;
20568         unsigned long : 3;
20569         unsigned long FAWF : 12;
20570         unsigned long FSPR : 1;
20571         unsigned long : 3;
20572         unsigned long FAWS : 12;
20573 #endif
20574     } BIT;
20575     } FAW;
20576     char          wk6[8];
20577     union {
20578         unsigned long LONG;
20579         struct {
20580
20581 #ifdef __RX_LITTLE_ENDIAN__
20582         unsigned long CODE : 32;
20583 #else
20584         unsigned long CODE : 32;
20585 #endif
20586     } BIT;
20587     } ROMCODE;
20588 } st_ofsm_t;
20589
20590 typedef struct st_pdc {
20591     union {
20592         unsigned long LONG;
20593         struct {
```

```

20594
20595 #ifdef __RX_LITTLE_ENDIAN__
20596     unsigned long PCKE : 1;
20597     unsigned long VPS : 1;
20598     unsigned long HPS : 1;
20599     unsigned long PRST : 1;
20600     unsigned long DFIE : 1;
20601     unsigned long FEIE : 1;
20602     unsigned long OVIE : 1;
20603     unsigned long UDRIE : 1;
20604     unsigned long VERIE : 1;
20605     unsigned long HERIE : 1;
20606     unsigned long PCKOE : 1;
20607     unsigned long PCKDIV : 3;
20608     unsigned long EDS : 1;
20609     unsigned long : 17;
20610 #else
20611     unsigned long : 17;
20612     unsigned long EDS : 1;
20613     unsigned long PCKDIV : 3;
20614     unsigned long PCKOE : 1;
20615     unsigned long HERIE : 1;
20616     unsigned long VERIE : 1;
20617     unsigned long UDRIE : 1;
20618     unsigned long OVIE : 1;
20619     unsigned long FEIE : 1;
20620     unsigned long DFIE : 1;
20621     unsigned long PRST : 1;
20622     unsigned long HPS : 1;
20623     unsigned long VPS : 1;
20624     unsigned long PCKE : 1;
20625 #endif
20626 } BIT;
20627 } PCCR0;
20628 union {
20629     unsigned long LONG;
20630     struct {
20631
20632 #ifdef __RX_LITTLE_ENDIAN__
20633     unsigned long PCE : 1;
20634     unsigned long : 31;
20635 #else
20636     unsigned long : 31;
20637     unsigned long PCE : 1;
20638 #endif
20639 } BIT;
20640 } PCCR1;
20641 union {
20642     unsigned long LONG;
20643     struct {
20644
20645 #ifdef __RX_LITTLE_ENDIAN__
20646     unsigned long FBSY : 1;
20647     unsigned long FEMPF : 1;
20648     unsigned long FEF : 1;
20649     unsigned long OVRF : 1;
20650     unsigned long UDRF : 1;
20651     unsigned long VERF : 1;
20652     unsigned long HERF : 1;
20653     unsigned long : 25;
20654 #else
20655     unsigned long : 25;
20656     unsigned long HERF : 1;
20657     unsigned long VERF : 1;
20658     unsigned long UDRF : 1;
20659     unsigned long OVRF : 1;
20660     unsigned long FEF : 1;
20661     unsigned long FEMPF : 1;
20662     unsigned long FBSY : 1;
20663 #endif
20664 } BIT;
20665 } PCSR;
20666 union {
20667     unsigned long LONG;
20668     struct {
20669
20670 #ifdef __RX_LITTLE_ENDIAN__
20671     unsigned long VSYNC : 1;
20672     unsigned long HSYNC : 1;
20673     unsigned long : 30;
20674 #else
20675     unsigned long : 30;
20676     unsigned long HSYNC : 1;
20677     unsigned long VSYNC : 1;
20678 #endif
20679 } BIT;
20680 } PCMONR;

```

```

20681     union {
20682         unsigned long LONG;
20683     } PCDR;
20684     union {
20685         unsigned long LONG;
20686         struct {
20687
20688 #ifdef __RX_LITTLE_ENDIAN__
20689         unsigned long VST : 12;
20690         unsigned long : 4;
20691         unsigned long VSZ : 12;
20692         unsigned long : 4;
20693 #else
20694         unsigned long : 4;
20695         unsigned long VSZ : 12;
20696         unsigned long : 4;
20697         unsigned long VST : 12;
20698 #endif
20699     } BIT;
20700     } VCR;
20701     union {
20702         unsigned long LONG;
20703         struct {
20704
20705 #ifdef __RX_LITTLE_ENDIAN__
20706         unsigned long HST : 12;
20707         unsigned long : 4;
20708         unsigned long HSZ : 12;
20709         unsigned long : 4;
20710 #else
20711         unsigned long : 4;
20712         unsigned long HSZ : 12;
20713         unsigned long : 4;
20714         unsigned long HST : 12;
20715 #endif
20716     } BIT;
20717     } HCR;
20718 } st_pdc_t;
20719
20720 typedef struct st_pmg {
20721     union {
20722         unsigned long LONG;
20723         struct {
20724
20725 #ifdef __RX_LITTLE_ENDIAN__
20726         unsigned long : 8;
20727         unsigned long PSMCS : 6;
20728         unsigned long : 1;
20729         unsigned long PSMDB : 1;
20730         unsigned long PSMHT : 3;
20731         unsigned long : 1;
20732         unsigned long PSMCT : 3;
20733         unsigned long : 9;
20734 #else
20735         unsigned long : 9;
20736         unsigned long PSMCT : 3;
20737         unsigned long : 1;
20738         unsigned long PSMHT : 3;
20739         unsigned long PSMDB : 1;
20740         unsigned long : 1;
20741         unsigned long PSMCS : 6;
20742         unsigned long : 8;
20743 #endif
20744     } BIT;
20745     } PMGCR;
20746     union {
20747         unsigned long LONG;
20748         struct {
20749
20750 #ifdef __RX_LITTLE_ENDIAN__
20751         unsigned long PSME : 1;
20752         unsigned long PSMAD : 1;
20753         unsigned long : 1;
20754         unsigned long PDA : 5;
20755         unsigned long PRA : 5;
20756         unsigned long : 3;
20757         unsigned long PRD : 16;
20758 #else
20759         unsigned long PRD : 16;
20760         unsigned long : 3;
20761         unsigned long PRA : 5;
20762         unsigned long PDA : 5;
20763         unsigned long : 1;
20764         unsigned long PSMAD : 1;
20765         unsigned long PSME : 1;
20766 #endif
20767     } BIT;

```

```

20768     } PSMR;
20769 } st_pmg1_t;
20770
20771 typedef struct st_poe {
20772     union {
20773         unsigned short WORD;
20774         struct {
20775
20776 #ifdef __RX_LITTLE_ENDIAN__
20777         unsigned short POE0M : 2;
20778         unsigned short : 6;
20779         unsigned short PIE1 : 1;
20780         unsigned short : 3;
20781         unsigned short POE0F : 1;
20782         unsigned short : 3;
20783 #else
20784         unsigned short : 3;
20785         unsigned short POE0F : 1;
20786         unsigned short : 3;
20787         unsigned short PIE1 : 1;
20788         unsigned short : 6;
20789         unsigned short POE0M : 2;
20790 #endif
20791     } BIT;
20792     } ICSR1;
20793     union {
20794         unsigned short WORD;
20795         struct {
20796
20797 #ifdef __RX_LITTLE_ENDIAN__
20798         unsigned short : 8;
20799         unsigned short OIE1 : 1;
20800         unsigned short OCE1 : 1;
20801         unsigned short : 5;
20802         unsigned short OSF1 : 1;
20803 #else
20804         unsigned short OSF1 : 1;
20805         unsigned short : 5;
20806         unsigned short OCE1 : 1;
20807         unsigned short OIE1 : 1;
20808         unsigned short : 8;
20809 #endif
20810     } BIT;
20811     } OCSR1;
20812     union {
20813         unsigned short WORD;
20814         struct {
20815
20816 #ifdef __RX_LITTLE_ENDIAN__
20817         unsigned short POE4M : 2;
20818         unsigned short : 6;
20819         unsigned short PIE2 : 1;
20820         unsigned short : 3;
20821         unsigned short POE4F : 1;
20822         unsigned short : 3;
20823 #else
20824         unsigned short : 3;
20825         unsigned short POE4F : 1;
20826         unsigned short : 3;
20827         unsigned short PIE2 : 1;
20828         unsigned short : 6;
20829         unsigned short POE4M : 2;
20830 #endif
20831     } BIT;
20832     } ICSR2;
20833     union {
20834         unsigned short WORD;
20835         struct {
20836
20837 #ifdef __RX_LITTLE_ENDIAN__
20838         unsigned short : 8;
20839         unsigned short OIE2 : 1;
20840         unsigned short OCE2 : 1;
20841         unsigned short : 5;
20842         unsigned short OSF2 : 1;
20843 #else
20844         unsigned short OSF2 : 1;
20845         unsigned short : 5;
20846         unsigned short OCE2 : 1;
20847         unsigned short OIE2 : 1;
20848         unsigned short : 8;
20849 #endif
20850     } BIT;
20851     } OCSR2;
20852     union {
20853         unsigned short WORD;
20854         struct {

```

```
20855
20856 #ifdef __RX_LITTLE_ENDIAN__
20857     unsigned short POE8M : 2;
20858     unsigned short : 6;
20859     unsigned short PIE3 : 1;
20860     unsigned short POE8E : 1;
20861     unsigned short : 2;
20862     unsigned short POE8F : 1;
20863     unsigned short : 3;
20864 #else
20865     unsigned short : 3;
20866     unsigned short POE8F : 1;
20867     unsigned short : 2;
20868     unsigned short POE8E : 1;
20869     unsigned short PIE3 : 1;
20870     unsigned short : 6;
20871     unsigned short POE8M : 2;
20872 #endif
20873 } BIT;
20874 } ICSR3;
20875 union {
20876     unsigned char BYTE;
20877     struct {
20878
20879 #ifdef __RX_LITTLE_ENDIAN__
20880     unsigned char MTUCH34HIZ : 1;
20881     unsigned char MTUCH67HIZ : 1;
20882     unsigned char MTUCH0HIZ : 1;
20883     unsigned char : 5;
20884 #else
20885     unsigned char : 5;
20886     unsigned char MTUCH0HIZ : 1;
20887     unsigned char MTUCH67HIZ : 1;
20888     unsigned char MTUCH34HIZ : 1;
20889 #endif
20890     } BIT;
20891     } SPOER;
20892     union {
20893         unsigned char BYTE;
20894         struct {
20895
20896 #ifdef __RX_LITTLE_ENDIAN__
20897     unsigned char MTU0AZE : 1;
20898     unsigned char MTU0BZE : 1;
20899     unsigned char MTU0CZE : 1;
20900     unsigned char MTU0DZE : 1;
20901     unsigned char : 4;
20902 #else
20903     unsigned char : 4;
20904     unsigned char MTU0DZE : 1;
20905     unsigned char MTU0CZE : 1;
20906     unsigned char MTU0BZE : 1;
20907     unsigned char MTU0AZE : 1;
20908 #endif
20909     } BIT;
20910     } POECR1;
20911     union {
20912         unsigned short WORD;
20913         struct {
20914
20915 #ifdef __RX_LITTLE_ENDIAN__
20916     unsigned short MTU7BDZE : 1;
20917     unsigned short MTU7ACZE : 1;
20918     unsigned short MTU6BDZE : 1;
20919     unsigned short : 5;
20920     unsigned short MTU4BDZE : 1;
20921     unsigned short MTU4ACZE : 1;
20922     unsigned short MTU3BDZE : 1;
20923     unsigned short : 5;
20924 #else
20925     unsigned short : 5;
20926     unsigned short MTU3BDZE : 1;
20927     unsigned short MTU4ACZE : 1;
20928     unsigned short MTU4BDZE : 1;
20929     unsigned short : 5;
20930     unsigned short MTU6BDZE : 1;
20931     unsigned short MTU7ACZE : 1;
20932     unsigned short MTU7BDZE : 1;
20933 #endif
20934     } BIT;
20935     } POECR2;
20936     char wk0[2];
20937     union {
20938         unsigned short WORD;
20939         struct {
20940
20941 #ifdef __RX_LITTLE_ENDIAN__
```

```

20942         unsigned short : 2;
20943         unsigned short IC2ADDMT34ZE : 1;
20944         unsigned short IC3ADDMT34ZE : 1;
20945         unsigned short IC4ADDMT34ZE : 1;
20946         unsigned short IC5ADDMT34ZE : 1;
20947         unsigned short : 3;
20948         unsigned short IC1ADDMT67ZE : 1;
20949         unsigned short : 1;
20950         unsigned short IC3ADDMT67ZE : 1;
20951         unsigned short IC4ADDMT67ZE : 1;
20952         unsigned short IC5ADDMT67ZE : 1;
20953         unsigned short : 2;
20954 #else
20955         unsigned short : 2;
20956         unsigned short IC5ADDMT67ZE : 1;
20957         unsigned short IC4ADDMT67ZE : 1;
20958         unsigned short IC3ADDMT67ZE : 1;
20959         unsigned short : 1;
20960         unsigned short IC1ADDMT67ZE : 1;
20961         unsigned short : 3;
20962         unsigned short IC5ADDMT34ZE : 1;
20963         unsigned short IC4ADDMT34ZE : 1;
20964         unsigned short IC3ADDMT34ZE : 1;
20965         unsigned short IC2ADDMT34ZE : 1;
20966         unsigned short : 2;
20967 #endif
20968     } BIT;
20969     } POECR4;
20970     union {
20971         unsigned short WORD;
20972         struct {
20973
20974 #ifdef __RX_LITTLE_ENDIAN__
20975         unsigned short : 1;
20976         unsigned short IC1ADDMT0ZE : 1;
20977         unsigned short IC2ADDMT0ZE : 1;
20978         unsigned short : 1;
20979         unsigned short IC4ADDMT0ZE : 1;
20980         unsigned short IC5ADDMT0ZE : 1;
20981         unsigned short : 10;
20982 #else
20983         unsigned short : 10;
20984         unsigned short IC5ADDMT0ZE : 1;
20985         unsigned short IC4ADDMT0ZE : 1;
20986         unsigned short : 1;
20987         unsigned short IC2ADDMT0ZE : 1;
20988         unsigned short IC1ADDMT0ZE : 1;
20989         unsigned short : 1;
20990 #endif
20991     } BIT;
20992     } POECR5;
20993     char        wk1[2];
20994     union {
20995         unsigned short WORD;
20996         struct {
20997
20998 #ifdef __RX_LITTLE_ENDIAN__
20999         unsigned short POE10M : 2;
21000         unsigned short : 6;
21001         unsigned short PIE4 : 1;
21002         unsigned short POE10E : 1;
21003         unsigned short : 2;
21004         unsigned short POE10F : 1;
21005         unsigned short : 3;
21006 #else
21007         unsigned short : 3;
21008         unsigned short POE10F : 1;
21009         unsigned short : 2;
21010         unsigned short POE10E : 1;
21011         unsigned short PIE4 : 1;
21012         unsigned short : 6;
21013         unsigned short POE10M : 2;
21014 #endif
21015     } BIT;
21016     } ICSR4;
21017     union {
21018         unsigned short WORD;
21019         struct {
21020
21021 #ifdef __RX_LITTLE_ENDIAN__
21022         unsigned short POE11M : 2;
21023         unsigned short : 6;
21024         unsigned short PIE5 : 1;
21025         unsigned short POE11E : 1;
21026         unsigned short : 2;
21027         unsigned short POE11F : 1;
21028         unsigned short : 3;

```

```

21029 #else
21030     unsigned short : 3;
21031     unsigned short POE11F : 1;
21032     unsigned short : 2;
21033     unsigned short POE11E : 1;
21034     unsigned short PIE5 : 1;
21035     unsigned short : 6;
21036     unsigned short POE11M : 2;
21037 #endif
21038 } BIT;
21039 } ICSR5;
21040 union {
21041     unsigned short WORD;
21042     struct {
21043
21044 #ifdef __RX_LITTLE_ENDIAN__
21045     unsigned short OLSG0A : 1;
21046     unsigned short OLSG0B : 1;
21047     unsigned short OLSG1A : 1;
21048     unsigned short OLSG1B : 1;
21049     unsigned short OLSG2A : 1;
21050     unsigned short OLSG2B : 1;
21051     unsigned short : 1;
21052     unsigned short OLSEN : 1;
21053     unsigned short : 8;
21054 #else
21055     unsigned short : 8;
21056     unsigned short OLSEN : 1;
21057     unsigned short : 1;
21058     unsigned short OLSG2B : 1;
21059     unsigned short OLSG2A : 1;
21060     unsigned short OLSG1B : 1;
21061     unsigned short OLSG1A : 1;
21062     unsigned short OLSG0B : 1;
21063     unsigned short OLSG0A : 1;
21064 #endif
21065 } BIT;
21066 } ALR1;
21067 union {
21068     unsigned short WORD;
21069     struct {
21070
21071 #ifdef __RX_LITTLE_ENDIAN__
21072     unsigned short : 9;
21073     unsigned short OSTSTE : 1;
21074     unsigned short : 2;
21075     unsigned short OSTSTF : 1;
21076     unsigned short : 3;
21077 #else
21078     unsigned short : 3;
21079     unsigned short OSTSTF : 1;
21080     unsigned short : 2;
21081     unsigned short OSTSTE : 1;
21082     unsigned short : 9;
21083 #endif
21084 } BIT;
21085 } ICSR6;
21086 char      wk2[6];
21087 union {
21088     unsigned char BYTE;
21089     struct {
21090
21091 #ifdef __RX_LITTLE_ENDIAN__
21092     unsigned char M0ASEL : 4;
21093     unsigned char M0BSEL : 4;
21094 #else
21095     unsigned char M0BSEL : 4;
21096     unsigned char M0ASEL : 4;
21097 #endif
21098 } BIT;
21099 } M0SELR1;
21100 union {
21101     unsigned char BYTE;
21102     struct {
21103
21104 #ifdef __RX_LITTLE_ENDIAN__
21105     unsigned char M0CSEL : 4;
21106     unsigned char M0DSEL : 4;
21107 #else
21108     unsigned char M0DSEL : 4;
21109     unsigned char M0CSEL : 4;
21110 #endif
21111 } BIT;
21112 } M0SELR2;
21113 union {
21114     unsigned char BYTE;
21115     struct {

```

```

21116
21117 #ifdef __RX_LITTLE_ENDIAN__
21118     unsigned char M3BSEL : 4;
21119     unsigned char M3DSEL : 4;
21120 #else
21121     unsigned char M3DSEL : 4;
21122     unsigned char M3BSEL : 4;
21123 #endif
21124     } BIT;
21125     } M3SELR;
21126     union {
21127         unsigned char BYTE;
21128         struct {
21129
21130 #ifdef __RX_LITTLE_ENDIAN__
21131         unsigned char M4ASEL : 4;
21132         unsigned char M4CSEL : 4;
21133 #else
21134         unsigned char M4CSEL : 4;
21135         unsigned char M4ASEL : 4;
21136 #endif
21137         } BIT;
21138         } M4SELR1;
21139         union {
21140             unsigned char BYTE;
21141             struct {
21142
21143 #ifdef __RX_LITTLE_ENDIAN__
21144             unsigned char M4BSEL : 4;
21145             unsigned char M4DSEL : 4;
21146 #else
21147             unsigned char M4DSEL : 4;
21148             unsigned char M4BSEL : 4;
21149 #endif
21150             } BIT;
21151             } M4SELR2;
21152             char          wk3[1];
21153             union {
21154                 unsigned char BYTE;
21155                 struct {
21156
21157 #ifdef __RX_LITTLE_ENDIAN__
21158                 unsigned char M6BSEL : 4;
21159                 unsigned char M6DSEL : 4;
21160 #else
21161                 unsigned char M6DSEL : 4;
21162                 unsigned char M6BSEL : 4;
21163 #endif
21164                 } BIT;
21165                 } M6SELR;
21166         } st_poe_t;
21167
21168 typedef struct st_poeg {
21169     union {
21170         unsigned long LONG;
21171         struct {
21172
21173 #ifdef __RX_LITTLE_ENDIAN__
21174         unsigned long PIDF : 1;
21175         unsigned long IOCF : 1;
21176         unsigned long OSTPF : 1;
21177         unsigned long SSF : 1;
21178         unsigned long PIDE : 1;
21179         unsigned long IOCE : 1;
21180         unsigned long OSTPE : 1;
21181         unsigned long  : 9;
21182         unsigned long ST : 1;
21183         unsigned long  : 11;
21184         unsigned long INV : 1;
21185         unsigned long NFEN : 1;
21186         unsigned long NFCS : 2;
21187 #else
21188         unsigned long NFCS : 2;
21189         unsigned long NFEN : 1;
21190         unsigned long INV : 1;
21191         unsigned long  : 11;
21192         unsigned long ST : 1;
21193         unsigned long  : 9;
21194         unsigned long OSTPE : 1;
21195         unsigned long IOCE : 1;
21196         unsigned long PIDE : 1;
21197         unsigned long SSF : 1;
21198         unsigned long OSTPF : 1;
21199         unsigned long IOCF : 1;
21200         unsigned long PIDF : 1;
21201 #endif
21202         } BIT;

```

```

21203     } POEGGA;
21204     char          wk0[252];
21205     union {
21206         unsigned long LONG;
21207         struct {
21208
21209 #ifdef __RX_LITTLE_ENDIAN__
21210         unsigned long PIDF : 1;
21211         unsigned long IOCF : 1;
21212         unsigned long OSTPF : 1;
21213         unsigned long SSF : 1;
21214         unsigned long PIDE : 1;
21215         unsigned long IOCE : 1;
21216         unsigned long OSTPE : 1;
21217         unsigned long      : 9;
21218         unsigned long ST : 1;
21219         unsigned long      : 11;
21220         unsigned long INV : 1;
21221         unsigned long NFEN : 1;
21222         unsigned long NFCS : 2;
21223 #else
21224         unsigned long NFCS : 2;
21225         unsigned long NFEN : 1;
21226         unsigned long INV : 1;
21227         unsigned long      : 11;
21228         unsigned long ST : 1;
21229         unsigned long      : 9;
21230         unsigned long OSTPE : 1;
21231         unsigned long IOCE : 1;
21232         unsigned long PIDE : 1;
21233         unsigned long SSF : 1;
21234         unsigned long OSTPF : 1;
21235         unsigned long IOCF : 1;
21236         unsigned long PIDF : 1;
21237 #endif
21238     } BIT;
21239     } POEGGB;
21240     char          wk1[252];
21241     union {
21242         unsigned long LONG;
21243         struct {
21244
21245 #ifdef __RX_LITTLE_ENDIAN__
21246         unsigned long PIDF : 1;
21247         unsigned long IOCF : 1;
21248         unsigned long OSTPF : 1;
21249         unsigned long SSF : 1;
21250         unsigned long PIDE : 1;
21251         unsigned long IOCE : 1;
21252         unsigned long OSTPE : 1;
21253         unsigned long      : 9;
21254         unsigned long ST : 1;
21255         unsigned long      : 11;
21256         unsigned long INV : 1;
21257         unsigned long NFEN : 1;
21258         unsigned long NFCS : 2;
21259 #else
21260         unsigned long NFCS : 2;
21261         unsigned long NFEN : 1;
21262         unsigned long INV : 1;
21263         unsigned long      : 11;
21264         unsigned long ST : 1;
21265         unsigned long      : 9;
21266         unsigned long OSTPE : 1;
21267         unsigned long IOCE : 1;
21268         unsigned long PIDE : 1;
21269         unsigned long SSF : 1;
21270         unsigned long OSTPF : 1;
21271         unsigned long IOCF : 1;
21272         unsigned long PIDF : 1;
21273 #endif
21274     } BIT;
21275     } POEGGC;
21276     char          wk2[252];
21277     union {
21278         unsigned long LONG;
21279         struct {
21280
21281 #ifdef __RX_LITTLE_ENDIAN__
21282         unsigned long PIDF : 1;
21283         unsigned long IOCF : 1;
21284         unsigned long OSTPF : 1;
21285         unsigned long SSF : 1;
21286         unsigned long PIDE : 1;
21287         unsigned long IOCE : 1;
21288         unsigned long OSTPE : 1;
21289         unsigned long      : 9;

```

```

21290         unsigned long ST : 1;
21291         unsigned long  : 11;
21292         unsigned long INV : 1;
21293         unsigned long NFEN : 1;
21294         unsigned long NFCS : 2;
21295 #else
21296         unsigned long NFCS : 2;
21297         unsigned long NFEN : 1;
21298         unsigned long INV : 1;
21299         unsigned long  : 11;
21300         unsigned long ST : 1;
21301         unsigned long  : 9;
21302         unsigned long OSTPE : 1;
21303         unsigned long IOCE : 1;
21304         unsigned long PIDE : 1;
21305         unsigned long SSF : 1;
21306         unsigned long OSTPF : 1;
21307         unsigned long IOCF : 1;
21308         unsigned long PIDF : 1;
21309 #endif
21310     } BIT;
21311     } POEGGD;
21312 } st_poeg_t;
21313
21314 typedef struct st_port0 {
21315     union {
21316         unsigned char BYTE;
21317         struct {
21318
21319 #ifdef __RX_LITTLE_ENDIAN__
21320         unsigned char B0 : 1;
21321         unsigned char B1 : 1;
21322         unsigned char B2 : 1;
21323         unsigned char B3 : 1;
21324         unsigned char  : 1;
21325         unsigned char B5 : 1;
21326         unsigned char  : 1;
21327         unsigned char B7 : 1;
21328 #else
21329         unsigned char B7 : 1;
21330         unsigned char  : 1;
21331         unsigned char B5 : 1;
21332         unsigned char  : 1;
21333         unsigned char B3 : 1;
21334         unsigned char B2 : 1;
21335         unsigned char B1 : 1;
21336         unsigned char B0 : 1;
21337 #endif
21338     } BIT;
21339     } PDR;
21340     char      wk0[31];
21341     union {
21342         unsigned char BYTE;
21343         struct {
21344
21345 #ifdef __RX_LITTLE_ENDIAN__
21346         unsigned char B0 : 1;
21347         unsigned char B1 : 1;
21348         unsigned char B2 : 1;
21349         unsigned char B3 : 1;
21350         unsigned char  : 1;
21351         unsigned char B5 : 1;
21352         unsigned char  : 1;
21353         unsigned char B7 : 1;
21354 #else
21355         unsigned char B7 : 1;
21356         unsigned char  : 1;
21357         unsigned char B5 : 1;
21358         unsigned char  : 1;
21359         unsigned char B3 : 1;
21360         unsigned char B2 : 1;
21361         unsigned char B1 : 1;
21362         unsigned char B0 : 1;
21363 #endif
21364     } BIT;
21365     } PODR;
21366     char      wk1[31];
21367     union {
21368         unsigned char BYTE;
21369         struct {
21370
21371 #ifdef __RX_LITTLE_ENDIAN__
21372         unsigned char B0 : 1;
21373         unsigned char B1 : 1;
21374         unsigned char B2 : 1;
21375         unsigned char B3 : 1;
21376         unsigned char  : 1;

```

```

21377         unsigned char B5 : 1;
21378         unsigned char : 1;
21379         unsigned char B7 : 1;
21380 #else
21381         unsigned char B7 : 1;
21382         unsigned char : 1;
21383         unsigned char B5 : 1;
21384         unsigned char : 1;
21385         unsigned char B3 : 1;
21386         unsigned char B2 : 1;
21387         unsigned char B1 : 1;
21388         unsigned char B0 : 1;
21389 #endif
21390     } BIT;
21391     } PIDR;
21392     char          wk2[31];
21393     union {
21394         unsigned char BYTE;
21395         struct {
21396
21397 #ifdef __RX_LITTLE_ENDIAN__
21398         unsigned char B0 : 1;
21399         unsigned char B1 : 1;
21400         unsigned char B2 : 1;
21401         unsigned char B3 : 1;
21402         unsigned char : 1;
21403         unsigned char B5 : 1;
21404         unsigned char : 1;
21405         unsigned char B7 : 1;
21406 #else
21407         unsigned char B7 : 1;
21408         unsigned char : 1;
21409         unsigned char B5 : 1;
21410         unsigned char : 1;
21411         unsigned char B3 : 1;
21412         unsigned char B2 : 1;
21413         unsigned char B1 : 1;
21414         unsigned char B0 : 1;
21415 #endif
21416     } BIT;
21417     } PMR;
21418     char          wk3[31];
21419     union {
21420         unsigned char BYTE;
21421         struct {
21422
21423 #ifdef __RX_LITTLE_ENDIAN__
21424         unsigned char B0 : 1;
21425         unsigned char : 1;
21426         unsigned char B2 : 1;
21427         unsigned char : 1;
21428         unsigned char B4 : 1;
21429         unsigned char : 1;
21430         unsigned char B6 : 1;
21431         unsigned char : 1;
21432 #else
21433         unsigned char : 1;
21434         unsigned char B6 : 1;
21435         unsigned char : 1;
21436         unsigned char B4 : 1;
21437         unsigned char : 1;
21438         unsigned char B2 : 1;
21439         unsigned char : 1;
21440         unsigned char B0 : 1;
21441 #endif
21442     } BIT;
21443     } ODR0;
21444     union {
21445         unsigned char BYTE;
21446         struct {
21447
21448 #ifdef __RX_LITTLE_ENDIAN__
21449         unsigned char : 2;
21450         unsigned char B2 : 1;
21451         unsigned char : 3;
21452         unsigned char B6 : 1;
21453         unsigned char : 1;
21454 #else
21455         unsigned char : 1;
21456         unsigned char B6 : 1;
21457         unsigned char : 3;
21458         unsigned char B2 : 1;
21459         unsigned char : 2;
21460 #endif
21461     } BIT;
21462     } ODR1;
21463     char          wk4[62];

```

```

21464     union {
21465         unsigned char BYTE;
21466     struct {
21467
21468 #ifdef __RX_LITTLE_ENDIAN__
21469         unsigned char B0 : 1;
21470         unsigned char B1 : 1;
21471         unsigned char B2 : 1;
21472         unsigned char B3 : 1;
21473         unsigned char : 1;
21474         unsigned char B5 : 1;
21475         unsigned char : 1;
21476         unsigned char B7 : 1;
21477 #else
21478         unsigned char B7 : 1;
21479         unsigned char : 1;
21480         unsigned char B5 : 1;
21481         unsigned char : 1;
21482         unsigned char B3 : 1;
21483         unsigned char B2 : 1;
21484         unsigned char B1 : 1;
21485         unsigned char B0 : 1;
21486 #endif
21487     } BIT;
21488     } PCR;
21489     char          wk5[31];
21490     union {
21491         unsigned char BYTE;
21492     struct {
21493
21494 #ifdef __RX_LITTLE_ENDIAN__
21495         unsigned char B0 : 1;
21496         unsigned char B1 : 1;
21497         unsigned char B2 : 1;
21498         unsigned char : 5;
21499 #else
21500         unsigned char : 5;
21501         unsigned char B2 : 1;
21502         unsigned char B1 : 1;
21503         unsigned char B0 : 1;
21504 #endif
21505     } BIT;
21506     } DSCR;
21507     char          wk6[71];
21508     union {
21509         unsigned char BYTE;
21510     struct {
21511
21512 #ifdef __RX_LITTLE_ENDIAN__
21513         unsigned char B0 : 1;
21514         unsigned char B1 : 1;
21515         unsigned char B2 : 1;
21516         unsigned char : 5;
21517 #else
21518         unsigned char : 5;
21519         unsigned char B2 : 1;
21520         unsigned char B1 : 1;
21521         unsigned char B0 : 1;
21522 #endif
21523     } BIT;
21524     } DSCR2;
21525 } st_port0_t;
21526
21527 typedef struct st_port1 {
21528     union {
21529         unsigned char BYTE;
21530     struct {
21531
21532 #ifdef __RX_LITTLE_ENDIAN__
21533         unsigned char B0 : 1;
21534         unsigned char B1 : 1;
21535         unsigned char B2 : 1;
21536         unsigned char B3 : 1;
21537         unsigned char B4 : 1;
21538         unsigned char B5 : 1;
21539         unsigned char B6 : 1;
21540         unsigned char B7 : 1;
21541 #else
21542         unsigned char B7 : 1;
21543         unsigned char B6 : 1;
21544         unsigned char B5 : 1;
21545         unsigned char B4 : 1;
21546         unsigned char B3 : 1;
21547         unsigned char B2 : 1;
21548         unsigned char B1 : 1;
21549         unsigned char B0 : 1;
21550 #endif

```

```

21551     } BIT;
21552     } PDR;
21553     char          wk0[31];
21554     union {
21555         unsigned char BYTE;
21556         struct {
21557
21558 #ifdef __RX_LITTLE_ENDIAN__
21559         unsigned char B0 : 1;
21560         unsigned char B1 : 1;
21561         unsigned char B2 : 1;
21562         unsigned char B3 : 1;
21563         unsigned char B4 : 1;
21564         unsigned char B5 : 1;
21565         unsigned char B6 : 1;
21566         unsigned char B7 : 1;
21567 #else
21568         unsigned char B7 : 1;
21569         unsigned char B6 : 1;
21570         unsigned char B5 : 1;
21571         unsigned char B4 : 1;
21572         unsigned char B3 : 1;
21573         unsigned char B2 : 1;
21574         unsigned char B1 : 1;
21575         unsigned char B0 : 1;
21576 #endif
21577     } BIT;
21578     } PODR;
21579     char          wk1[31];
21580     union {
21581         unsigned char BYTE;
21582         struct {
21583
21584 #ifdef __RX_LITTLE_ENDIAN__
21585         unsigned char B0 : 1;
21586         unsigned char B1 : 1;
21587         unsigned char B2 : 1;
21588         unsigned char B3 : 1;
21589         unsigned char B4 : 1;
21590         unsigned char B5 : 1;
21591         unsigned char B6 : 1;
21592         unsigned char B7 : 1;
21593 #else
21594         unsigned char B7 : 1;
21595         unsigned char B6 : 1;
21596         unsigned char B5 : 1;
21597         unsigned char B4 : 1;
21598         unsigned char B3 : 1;
21599         unsigned char B2 : 1;
21600         unsigned char B1 : 1;
21601         unsigned char B0 : 1;
21602 #endif
21603     } BIT;
21604     } PIDR;
21605     char          wk2[31];
21606     union {
21607         unsigned char BYTE;
21608         struct {
21609
21610 #ifdef __RX_LITTLE_ENDIAN__
21611         unsigned char B0 : 1;
21612         unsigned char B1 : 1;
21613         unsigned char B2 : 1;
21614         unsigned char B3 : 1;
21615         unsigned char B4 : 1;
21616         unsigned char B5 : 1;
21617         unsigned char B6 : 1;
21618         unsigned char B7 : 1;
21619 #else
21620         unsigned char B7 : 1;
21621         unsigned char B6 : 1;
21622         unsigned char B5 : 1;
21623         unsigned char B4 : 1;
21624         unsigned char B3 : 1;
21625         unsigned char B2 : 1;
21626         unsigned char B1 : 1;
21627         unsigned char B0 : 1;
21628 #endif
21629     } BIT;
21630     } PMR;
21631     char          wk3[32];
21632     union {
21633         unsigned char BYTE;
21634         struct {
21635
21636 #ifdef __RX_LITTLE_ENDIAN__
21637         unsigned char B0 : 1;

```

```

21638         unsigned char : 1;
21639         unsigned char B2 : 1;
21640         unsigned char : 1;
21641         unsigned char B4 : 1;
21642         unsigned char : 1;
21643         unsigned char B6 : 1;
21644         unsigned char : 1;
21645 #else
21646         unsigned char : 1;
21647         unsigned char B6 : 1;
21648         unsigned char : 1;
21649         unsigned char B4 : 1;
21650         unsigned char : 1;
21651         unsigned char B2 : 1;
21652         unsigned char : 1;
21653         unsigned char B0 : 1;
21654 #endif
21655     } BIT;
21656     } ODR0;
21657     union {
21658         unsigned char BYTE;
21659         struct {
21660
21661 #ifdef __RX_LITTLE_ENDIAN__
21662         unsigned char B0 : 1;
21663         unsigned char : 1;
21664         unsigned char B2 : 1;
21665         unsigned char : 1;
21666         unsigned char B4 : 1;
21667         unsigned char : 1;
21668         unsigned char B6 : 1;
21669         unsigned char : 1;
21670 #else
21671         unsigned char : 1;
21672         unsigned char B6 : 1;
21673         unsigned char : 1;
21674         unsigned char B4 : 1;
21675         unsigned char : 1;
21676         unsigned char B2 : 1;
21677         unsigned char : 1;
21678         unsigned char B0 : 1;
21679 #endif
21680     } BIT;
21681     } ODR1;
21682     char          wk4[61];
21683     union {
21684         unsigned char BYTE;
21685         struct {
21686
21687 #ifdef __RX_LITTLE_ENDIAN__
21688         unsigned char B0 : 1;
21689         unsigned char B1 : 1;
21690         unsigned char B2 : 1;
21691         unsigned char B3 : 1;
21692         unsigned char B4 : 1;
21693         unsigned char B5 : 1;
21694         unsigned char B6 : 1;
21695         unsigned char B7 : 1;
21696 #else
21697         unsigned char B7 : 1;
21698         unsigned char B6 : 1;
21699         unsigned char B5 : 1;
21700         unsigned char B4 : 1;
21701         unsigned char B3 : 1;
21702         unsigned char B2 : 1;
21703         unsigned char B1 : 1;
21704         unsigned char B0 : 1;
21705 #endif
21706     } BIT;
21707     } PCR;
21708     char          wk5[31];
21709     union {
21710         unsigned char BYTE;
21711         struct {
21712
21713 #ifdef __RX_LITTLE_ENDIAN__
21714         unsigned char : 1;
21715         unsigned char B1 : 1;
21716         unsigned char B2 : 1;
21717         unsigned char B3 : 1;
21718         unsigned char B4 : 1;
21719         unsigned char : 3;
21720 #else
21721         unsigned char : 3;
21722         unsigned char B4 : 1;
21723         unsigned char B3 : 1;
21724         unsigned char B2 : 1;

```

```
21725         unsigned char B1 : 1;
21726         unsigned char : 1;
21727 #endif
21728     } BIT;
21729     } DSCR;
21730     char          wk6[71];
21731     union {
21732         unsigned char BYTE;
21733         struct {
21734
21735 #ifdef __RX_LITTLE_ENDIAN__
21736         unsigned char : 1;
21737         unsigned char B1 : 1;
21738         unsigned char B2 : 1;
21739         unsigned char B3 : 1;
21740         unsigned char B4 : 1;
21741         unsigned char : 2;
21742         unsigned char B7 : 1;
21743 #else
21744         unsigned char B7 : 1;
21745         unsigned char : 2;
21746         unsigned char B4 : 1;
21747         unsigned char B3 : 1;
21748         unsigned char B2 : 1;
21749         unsigned char B1 : 1;
21750         unsigned char : 1;
21751 #endif
21752     } BIT;
21753     } DSCR2;
21754 } st_port1_t;
21755
21756 typedef struct st_port2 {
21757     union {
21758         unsigned char BYTE;
21759         struct {
21760
21761 #ifdef __RX_LITTLE_ENDIAN__
21762         unsigned char B0 : 1;
21763         unsigned char B1 : 1;
21764         unsigned char B2 : 1;
21765         unsigned char B3 : 1;
21766         unsigned char B4 : 1;
21767         unsigned char B5 : 1;
21768         unsigned char B6 : 1;
21769         unsigned char B7 : 1;
21770 #else
21771         unsigned char B7 : 1;
21772         unsigned char B6 : 1;
21773         unsigned char B5 : 1;
21774         unsigned char B4 : 1;
21775         unsigned char B3 : 1;
21776         unsigned char B2 : 1;
21777         unsigned char B1 : 1;
21778         unsigned char B0 : 1;
21779 #endif
21780     } BIT;
21781     } PDR;
21782     char          wk0[31];
21783     union {
21784         unsigned char BYTE;
21785         struct {
21786
21787 #ifdef __RX_LITTLE_ENDIAN__
21788         unsigned char B0 : 1;
21789         unsigned char B1 : 1;
21790         unsigned char B2 : 1;
21791         unsigned char B3 : 1;
21792         unsigned char B4 : 1;
21793         unsigned char B5 : 1;
21794         unsigned char B6 : 1;
21795         unsigned char B7 : 1;
21796 #else
21797         unsigned char B7 : 1;
21798         unsigned char B6 : 1;
21799         unsigned char B5 : 1;
21800         unsigned char B4 : 1;
21801         unsigned char B3 : 1;
21802         unsigned char B2 : 1;
21803         unsigned char B1 : 1;
21804         unsigned char B0 : 1;
21805 #endif
21806     } BIT;
21807     } PODR;
21808     char          wk1[31];
21809     union {
21810         unsigned char BYTE;
21811         struct {
```

```
21812
21813 #ifdef __RX_LITTLE_ENDIAN__
21814     unsigned char B0 : 1;
21815     unsigned char B1 : 1;
21816     unsigned char B2 : 1;
21817     unsigned char B3 : 1;
21818     unsigned char B4 : 1;
21819     unsigned char B5 : 1;
21820     unsigned char B6 : 1;
21821     unsigned char B7 : 1;
21822 #else
21823     unsigned char B7 : 1;
21824     unsigned char B6 : 1;
21825     unsigned char B5 : 1;
21826     unsigned char B4 : 1;
21827     unsigned char B3 : 1;
21828     unsigned char B2 : 1;
21829     unsigned char B1 : 1;
21830     unsigned char B0 : 1;
21831 #endif
21832 } BIT;
21833 } PIDR;
21834 char          wk2[31];
21835 union {
21836     unsigned char BYTE;
21837     struct {
21838
21839 #ifdef __RX_LITTLE_ENDIAN__
21840     unsigned char B0 : 1;
21841     unsigned char B1 : 1;
21842     unsigned char B2 : 1;
21843     unsigned char B3 : 1;
21844     unsigned char B4 : 1;
21845     unsigned char B5 : 1;
21846     unsigned char B6 : 1;
21847     unsigned char B7 : 1;
21848 #else
21849     unsigned char B7 : 1;
21850     unsigned char B6 : 1;
21851     unsigned char B5 : 1;
21852     unsigned char B4 : 1;
21853     unsigned char B3 : 1;
21854     unsigned char B2 : 1;
21855     unsigned char B1 : 1;
21856     unsigned char B0 : 1;
21857 #endif
21858 } BIT;
21859 } PMR;
21860 char          wk3[33];
21861 union {
21862     unsigned char BYTE;
21863     struct {
21864
21865 #ifdef __RX_LITTLE_ENDIAN__
21866     unsigned char B0 : 1;
21867     unsigned char : 1;
21868     unsigned char B2 : 1;
21869     unsigned char : 1;
21870     unsigned char B4 : 1;
21871     unsigned char : 1;
21872     unsigned char B6 : 1;
21873     unsigned char : 1;
21874 #else
21875     unsigned char : 1;
21876     unsigned char B6 : 1;
21877     unsigned char : 1;
21878     unsigned char B4 : 1;
21879     unsigned char : 1;
21880     unsigned char B2 : 1;
21881     unsigned char : 1;
21882     unsigned char B0 : 1;
21883 #endif
21884 } BIT;
21885 } ODR0;
21886 union {
21887     unsigned char BYTE;
21888     struct {
21889
21890 #ifdef __RX_LITTLE_ENDIAN__
21891     unsigned char B0 : 1;
21892     unsigned char : 1;
21893     unsigned char B2 : 1;
21894     unsigned char : 1;
21895     unsigned char B4 : 1;
21896     unsigned char : 1;
21897     unsigned char B6 : 1;
21898     unsigned char : 1;
```

```

21899 #else
21900     unsigned char : 1;
21901     unsigned char B6 : 1;
21902     unsigned char : 1;
21903     unsigned char B4 : 1;
21904     unsigned char : 1;
21905     unsigned char B2 : 1;
21906     unsigned char : 1;
21907     unsigned char B0 : 1;
21908 #endif
21909     } BIT;
21910     } ODR1;
21911     char          wk4[60];
21912     union {
21913         unsigned char BYTE;
21914         struct {
21915
21916 #ifdef __RX_LITTLE_ENDIAN__
21917         unsigned char B0 : 1;
21918         unsigned char B1 : 1;
21919         unsigned char B2 : 1;
21920         unsigned char B3 : 1;
21921         unsigned char B4 : 1;
21922         unsigned char B5 : 1;
21923         unsigned char B6 : 1;
21924         unsigned char B7 : 1;
21925 #else
21926         unsigned char B7 : 1;
21927         unsigned char B6 : 1;
21928         unsigned char B5 : 1;
21929         unsigned char B4 : 1;
21930         unsigned char B3 : 1;
21931         unsigned char B2 : 1;
21932         unsigned char B1 : 1;
21933         unsigned char B0 : 1;
21934 #endif
21935     } BIT;
21936     } PCR;
21937     char          wk5[31];
21938     union {
21939         unsigned char BYTE;
21940         struct {
21941
21942 #ifdef __RX_LITTLE_ENDIAN__
21943         unsigned char : 7;
21944         unsigned char B7 : 1;
21945 #else
21946         unsigned char B7 : 1;
21947         unsigned char : 7;
21948 #endif
21949     } BIT;
21950     } DSCR;
21951     char          wk6[71];
21952     union {
21953         unsigned char BYTE;
21954         struct {
21955
21956 #ifdef __RX_LITTLE_ENDIAN__
21957         unsigned char B0 : 1;
21958         unsigned char B1 : 1;
21959         unsigned char B2 : 1;
21960         unsigned char B3 : 1;
21961         unsigned char : 3;
21962         unsigned char B7 : 1;
21963 #else
21964         unsigned char B7 : 1;
21965         unsigned char : 3;
21966         unsigned char B3 : 1;
21967         unsigned char B2 : 1;
21968         unsigned char B1 : 1;
21969         unsigned char B0 : 1;
21970 #endif
21971     } BIT;
21972     } DSCR2;
21973 } st_port2_t;
21974
21975 typedef struct st_port3 {
21976     union {
21977         unsigned char BYTE;
21978         struct {
21979
21980 #ifdef __RX_LITTLE_ENDIAN__
21981         unsigned char B0 : 1;
21982         unsigned char B1 : 1;
21983         unsigned char B2 : 1;
21984         unsigned char B3 : 1;
21985         unsigned char B4 : 1;

```

```

21986         unsigned char : 1;
21987         unsigned char B6 : 1;
21988         unsigned char B7 : 1;
21989 #else
21990         unsigned char B7 : 1;
21991         unsigned char B6 : 1;
21992         unsigned char : 1;
21993         unsigned char B4 : 1;
21994         unsigned char B3 : 1;
21995         unsigned char B2 : 1;
21996         unsigned char B1 : 1;
21997         unsigned char B0 : 1;
21998 #endif
21999     } BIT;
22000     } PDR;
22001     char          wk0[31];
22002     union {
22003         unsigned char BYTE;
22004         struct {
22005
22006 #ifdef __RX_LITTLE_ENDIAN__
22007         unsigned char B0 : 1;
22008         unsigned char B1 : 1;
22009         unsigned char B2 : 1;
22010         unsigned char B3 : 1;
22011         unsigned char B4 : 1;
22012         unsigned char : 1;
22013         unsigned char B6 : 1;
22014         unsigned char B7 : 1;
22015 #else
22016         unsigned char B7 : 1;
22017         unsigned char B6 : 1;
22018         unsigned char : 1;
22019         unsigned char B4 : 1;
22020         unsigned char B3 : 1;
22021         unsigned char B2 : 1;
22022         unsigned char B1 : 1;
22023         unsigned char B0 : 1;
22024 #endif
22025     } BIT;
22026     } PODR;
22027     char          wk1[31];
22028     union {
22029         unsigned char BYTE;
22030         struct {
22031
22032 #ifdef __RX_LITTLE_ENDIAN__
22033         unsigned char B0 : 1;
22034         unsigned char B1 : 1;
22035         unsigned char B2 : 1;
22036         unsigned char B3 : 1;
22037         unsigned char B4 : 1;
22038         unsigned char B5 : 1;
22039         unsigned char B6 : 1;
22040         unsigned char B7 : 1;
22041 #else
22042         unsigned char B7 : 1;
22043         unsigned char B6 : 1;
22044         unsigned char B5 : 1;
22045         unsigned char B4 : 1;
22046         unsigned char B3 : 1;
22047         unsigned char B2 : 1;
22048         unsigned char B1 : 1;
22049         unsigned char B0 : 1;
22050 #endif
22051     } BIT;
22052     } PIDR;
22053     char          wk2[31];
22054     union {
22055         unsigned char BYTE;
22056         struct {
22057
22058 #ifdef __RX_LITTLE_ENDIAN__
22059         unsigned char B0 : 1;
22060         unsigned char B1 : 1;
22061         unsigned char B2 : 1;
22062         unsigned char B3 : 1;
22063         unsigned char B4 : 1;
22064         unsigned char : 1;
22065         unsigned char B6 : 1;
22066         unsigned char B7 : 1;
22067 #else
22068         unsigned char B7 : 1;
22069         unsigned char B6 : 1;
22070         unsigned char : 1;
22071         unsigned char B4 : 1;
22072         unsigned char B3 : 1;

```

```

22073         unsigned char B2 : 1;
22074         unsigned char B1 : 1;
22075         unsigned char B0 : 1;
22076 #endif
22077     } BIT;
22078     } PMR;
22079     char        wk3[34];
22080     union {
22081         unsigned char BYTE;
22082         struct {
22083
22084 #ifdef __RX_LITTLE_ENDIAN__
22085         unsigned char B0 : 1;
22086         unsigned char : 1;
22087         unsigned char B2 : 1;
22088         unsigned char : 1;
22089         unsigned char B4 : 1;
22090         unsigned char : 1;
22091         unsigned char B6 : 1;
22092         unsigned char : 1;
22093 #else
22094         unsigned char : 1;
22095         unsigned char B6 : 1;
22096         unsigned char : 1;
22097         unsigned char B4 : 1;
22098         unsigned char : 1;
22099         unsigned char B2 : 1;
22100         unsigned char : 1;
22101         unsigned char B0 : 1;
22102 #endif
22103     } BIT;
22104     } ODR0;
22105     union {
22106         unsigned char BYTE;
22107         struct {
22108
22109 #ifdef __RX_LITTLE_ENDIAN__
22110         unsigned char B0 : 1;
22111         unsigned char : 3;
22112         unsigned char B4 : 1;
22113         unsigned char : 1;
22114         unsigned char B6 : 1;
22115         unsigned char : 1;
22116 #else
22117         unsigned char : 1;
22118         unsigned char B6 : 1;
22119         unsigned char : 1;
22120         unsigned char B4 : 1;
22121         unsigned char : 3;
22122         unsigned char B0 : 1;
22123 #endif
22124     } BIT;
22125     } ODR1;
22126     char        wk4[59];
22127     union {
22128         unsigned char BYTE;
22129         struct {
22130
22131 #ifdef __RX_LITTLE_ENDIAN__
22132         unsigned char B0 : 1;
22133         unsigned char B1 : 1;
22134         unsigned char B2 : 1;
22135         unsigned char B3 : 1;
22136         unsigned char B4 : 1;
22137         unsigned char : 1;
22138         unsigned char B6 : 1;
22139         unsigned char B7 : 1;
22140 #else
22141         unsigned char B7 : 1;
22142         unsigned char B6 : 1;
22143         unsigned char : 1;
22144         unsigned char B4 : 1;
22145         unsigned char B3 : 1;
22146         unsigned char B2 : 1;
22147         unsigned char B1 : 1;
22148         unsigned char B0 : 1;
22149 #endif
22150     } BIT;
22151     } PCR;
22152     char        wk5[103];
22153     union {
22154         unsigned char BYTE;
22155         struct {
22156
22157 #ifdef __RX_LITTLE_ENDIAN__
22158         unsigned char B0 : 1;
22159         unsigned char B1 : 1;

```

```

22160         unsigned char : 6;
22161 #else
22162         unsigned char : 6;
22163         unsigned char B1 : 1;
22164         unsigned char B0 : 1;
22165 #endif
22166     } BIT;
22167     } DSCR2;
22168 } st_port3_t;
22169
22170 typedef struct st_port4 {
22171     union {
22172         unsigned char BYTE;
22173         struct {
22174
22175 #ifdef __RX_LITTLE_ENDIAN__
22176         unsigned char B0 : 1;
22177         unsigned char B1 : 1;
22178         unsigned char B2 : 1;
22179         unsigned char B3 : 1;
22180         unsigned char B4 : 1;
22181         unsigned char B5 : 1;
22182         unsigned char B6 : 1;
22183         unsigned char B7 : 1;
22184 #else
22185         unsigned char B7 : 1;
22186         unsigned char B6 : 1;
22187         unsigned char B5 : 1;
22188         unsigned char B4 : 1;
22189         unsigned char B3 : 1;
22190         unsigned char B2 : 1;
22191         unsigned char B1 : 1;
22192         unsigned char B0 : 1;
22193 #endif
22194     } BIT;
22195     } PDR;
22196     char          wk0[31];
22197     union {
22198         unsigned char BYTE;
22199         struct {
22200
22201 #ifdef __RX_LITTLE_ENDIAN__
22202         unsigned char B0 : 1;
22203         unsigned char B1 : 1;
22204         unsigned char B2 : 1;
22205         unsigned char B3 : 1;
22206         unsigned char B4 : 1;
22207         unsigned char B5 : 1;
22208         unsigned char B6 : 1;
22209         unsigned char B7 : 1;
22210 #else
22211         unsigned char B7 : 1;
22212         unsigned char B6 : 1;
22213         unsigned char B5 : 1;
22214         unsigned char B4 : 1;
22215         unsigned char B3 : 1;
22216         unsigned char B2 : 1;
22217         unsigned char B1 : 1;
22218         unsigned char B0 : 1;
22219 #endif
22220     } BIT;
22221     } PODR;
22222     char          wk1[31];
22223     union {
22224         unsigned char BYTE;
22225         struct {
22226
22227 #ifdef __RX_LITTLE_ENDIAN__
22228         unsigned char B0 : 1;
22229         unsigned char B1 : 1;
22230         unsigned char B2 : 1;
22231         unsigned char B3 : 1;
22232         unsigned char B4 : 1;
22233         unsigned char B5 : 1;
22234         unsigned char B6 : 1;
22235         unsigned char B7 : 1;
22236 #else
22237         unsigned char B7 : 1;
22238         unsigned char B6 : 1;
22239         unsigned char B5 : 1;
22240         unsigned char B4 : 1;
22241         unsigned char B3 : 1;
22242         unsigned char B2 : 1;
22243         unsigned char B1 : 1;
22244         unsigned char B0 : 1;
22245 #endif
22246     } BIT;

```

```

22247     } PIDR;
22248     char          wk2[31];
22249     union {
22250         unsigned char BYTE;
22251         struct {
22252
22253 #ifdef __RX_LITTLE_ENDIAN__
22254         unsigned char B0 : 1;
22255         unsigned char B1 : 1;
22256         unsigned char B2 : 1;
22257         unsigned char B3 : 1;
22258         unsigned char B4 : 1;
22259         unsigned char B5 : 1;
22260         unsigned char B6 : 1;
22261         unsigned char B7 : 1;
22262 #else
22263         unsigned char B7 : 1;
22264         unsigned char B6 : 1;
22265         unsigned char B5 : 1;
22266         unsigned char B4 : 1;
22267         unsigned char B3 : 1;
22268         unsigned char B2 : 1;
22269         unsigned char B1 : 1;
22270         unsigned char B0 : 1;
22271 #endif
22272     } BIT;
22273     } PMR;
22274     char          wk3[35];
22275     union {
22276         unsigned char BYTE;
22277         struct {
22278
22279 #ifdef __RX_LITTLE_ENDIAN__
22280         unsigned char B0 : 1;
22281         unsigned char  : 1;
22282         unsigned char B2 : 1;
22283         unsigned char  : 1;
22284         unsigned char B4 : 1;
22285         unsigned char  : 1;
22286         unsigned char B6 : 1;
22287         unsigned char  : 1;
22288 #else
22289         unsigned char  : 1;
22290         unsigned char B6 : 1;
22291         unsigned char  : 1;
22292         unsigned char B4 : 1;
22293         unsigned char  : 1;
22294         unsigned char B2 : 1;
22295         unsigned char  : 1;
22296         unsigned char B0 : 1;
22297 #endif
22298     } BIT;
22299     } ODR0;
22300     union {
22301         unsigned char BYTE;
22302         struct {
22303
22304 #ifdef __RX_LITTLE_ENDIAN__
22305         unsigned char B0 : 1;
22306         unsigned char  : 1;
22307         unsigned char B2 : 1;
22308         unsigned char  : 1;
22309         unsigned char B4 : 1;
22310         unsigned char  : 1;
22311         unsigned char B6 : 1;
22312         unsigned char  : 1;
22313 #else
22314         unsigned char  : 1;
22315         unsigned char B6 : 1;
22316         unsigned char  : 1;
22317         unsigned char B4 : 1;
22318         unsigned char  : 1;
22319         unsigned char B2 : 1;
22320         unsigned char  : 1;
22321         unsigned char B0 : 1;
22322 #endif
22323     } BIT;
22324     } ODR1;
22325     char          wk4[58];
22326     union {
22327         unsigned char BYTE;
22328         struct {
22329
22330 #ifdef __RX_LITTLE_ENDIAN__
22331         unsigned char B0 : 1;
22332         unsigned char B1 : 1;
22333         unsigned char B2 : 1;

```

```
22334         unsigned char B3 : 1;
22335         unsigned char B4 : 1;
22336         unsigned char B5 : 1;
22337         unsigned char B6 : 1;
22338         unsigned char B7 : 1;
22339 #else
22340         unsigned char B7 : 1;
22341         unsigned char B6 : 1;
22342         unsigned char B5 : 1;
22343         unsigned char B4 : 1;
22344         unsigned char B3 : 1;
22345         unsigned char B2 : 1;
22346         unsigned char B1 : 1;
22347         unsigned char B0 : 1;
22348 #endif
22349     } BIT;
22350     } PCR;
22351 } st_port4_t;
22352
22353 typedef struct st_port5 {
22354     union {
22355         unsigned char BYTE;
22356         struct {
22357
22358 #ifdef __RX_LITTLE_ENDIAN__
22359         unsigned char B0 : 1;
22360         unsigned char B1 : 1;
22361         unsigned char B2 : 1;
22362         unsigned char B3 : 1;
22363         unsigned char B4 : 1;
22364         unsigned char B5 : 1;
22365         unsigned char B6 : 1;
22366         unsigned char B7 : 1;
22367 #else
22368         unsigned char B7 : 1;
22369         unsigned char B6 : 1;
22370         unsigned char B5 : 1;
22371         unsigned char B4 : 1;
22372         unsigned char B3 : 1;
22373         unsigned char B2 : 1;
22374         unsigned char B1 : 1;
22375         unsigned char B0 : 1;
22376 #endif
22377     } BIT;
22378     } PDR;
22379     char          wk0[31];
22380     union {
22381         unsigned char BYTE;
22382         struct {
22383
22384 #ifdef __RX_LITTLE_ENDIAN__
22385         unsigned char B0 : 1;
22386         unsigned char B1 : 1;
22387         unsigned char B2 : 1;
22388         unsigned char B3 : 1;
22389         unsigned char B4 : 1;
22390         unsigned char B5 : 1;
22391         unsigned char B6 : 1;
22392         unsigned char B7 : 1;
22393 #else
22394         unsigned char B7 : 1;
22395         unsigned char B6 : 1;
22396         unsigned char B5 : 1;
22397         unsigned char B4 : 1;
22398         unsigned char B3 : 1;
22399         unsigned char B2 : 1;
22400         unsigned char B1 : 1;
22401         unsigned char B0 : 1;
22402 #endif
22403     } BIT;
22404     } PODR;
22405     char          wk1[31];
22406     union {
22407         unsigned char BYTE;
22408         struct {
22409
22410 #ifdef __RX_LITTLE_ENDIAN__
22411         unsigned char B0 : 1;
22412         unsigned char B1 : 1;
22413         unsigned char B2 : 1;
22414         unsigned char B3 : 1;
22415         unsigned char B4 : 1;
22416         unsigned char B5 : 1;
22417         unsigned char B6 : 1;
22418         unsigned char B7 : 1;
22419 #else
22420         unsigned char B7 : 1;
```

```
22421         unsigned char B6 : 1;
22422         unsigned char B5 : 1;
22423         unsigned char B4 : 1;
22424         unsigned char B3 : 1;
22425         unsigned char B2 : 1;
22426         unsigned char B1 : 1;
22427         unsigned char B0 : 1;
22428     #endif
22429     } BIT;
22430     } PIDR;
22431     char          wk2[31];
22432     union {
22433         unsigned char BYTE;
22434         struct {
22435
22436     #ifdef __RX_LITTLE_ENDIAN__
22437         unsigned char B0 : 1;
22438         unsigned char B1 : 1;
22439         unsigned char B2 : 1;
22440         unsigned char B3 : 1;
22441         unsigned char B4 : 1;
22442         unsigned char B5 : 1;
22443         unsigned char B6 : 1;
22444         unsigned char B7 : 1;
22445     #else
22446         unsigned char B7 : 1;
22447         unsigned char B6 : 1;
22448         unsigned char B5 : 1;
22449         unsigned char B4 : 1;
22450         unsigned char B3 : 1;
22451         unsigned char B2 : 1;
22452         unsigned char B1 : 1;
22453         unsigned char B0 : 1;
22454     #endif
22455     } BIT;
22456     } PMR;
22457     char          wk3[36];
22458     union {
22459         unsigned char BYTE;
22460         struct {
22461
22462     #ifdef __RX_LITTLE_ENDIAN__
22463         unsigned char B0 : 1;
22464         unsigned char  : 1;
22465         unsigned char B2 : 1;
22466         unsigned char  : 1;
22467         unsigned char B4 : 1;
22468         unsigned char  : 1;
22469         unsigned char B6 : 1;
22470         unsigned char  : 1;
22471     #else
22472         unsigned char  : 1;
22473         unsigned char B6 : 1;
22474         unsigned char  : 1;
22475         unsigned char B4 : 1;
22476         unsigned char  : 1;
22477         unsigned char B2 : 1;
22478         unsigned char  : 1;
22479         unsigned char B0 : 1;
22480     #endif
22481     } BIT;
22482     } ODR0;
22483     union {
22484         unsigned char BYTE;
22485         struct {
22486
22487     #ifdef __RX_LITTLE_ENDIAN__
22488         unsigned char B0 : 1;
22489         unsigned char  : 1;
22490         unsigned char B2 : 1;
22491         unsigned char  : 1;
22492         unsigned char B4 : 1;
22493         unsigned char  : 1;
22494         unsigned char B6 : 1;
22495         unsigned char  : 1;
22496     #else
22497         unsigned char  : 1;
22498         unsigned char B6 : 1;
22499         unsigned char  : 1;
22500         unsigned char B4 : 1;
22501         unsigned char  : 1;
22502         unsigned char B2 : 1;
22503         unsigned char  : 1;
22504         unsigned char B0 : 1;
22505     #endif
22506     } BIT;
22507     } ODR1;
```

```

22508     char            wk4[57];
22509     union {
22510         unsigned char BYTE;
22511         struct {
22512
22513 #ifdef __RX_LITTLE_ENDIAN__
22514         unsigned char B0 : 1;
22515         unsigned char B1 : 1;
22516         unsigned char B2 : 1;
22517         unsigned char B3 : 1;
22518         unsigned char B4 : 1;
22519         unsigned char B5 : 1;
22520         unsigned char B6 : 1;
22521         unsigned char B7 : 1;
22522 #else
22523         unsigned char B7 : 1;
22524         unsigned char B6 : 1;
22525         unsigned char B5 : 1;
22526         unsigned char B4 : 1;
22527         unsigned char B3 : 1;
22528         unsigned char B2 : 1;
22529         unsigned char B1 : 1;
22530         unsigned char B0 : 1;
22531 #endif
22532     } BIT;
22533     } PCR;
22534     char            wk5[31];
22535     union {
22536         unsigned char BYTE;
22537         struct {
22538
22539 #ifdef __RX_LITTLE_ENDIAN__
22540         unsigned char B0 : 1;
22541         unsigned char B1 : 1;
22542         unsigned char B2 : 1;
22543         unsigned char : 1;
22544         unsigned char B4 : 1;
22545         unsigned char B5 : 1;
22546         unsigned char B6 : 1;
22547         unsigned char B7 : 1;
22548 #else
22549         unsigned char B7 : 1;
22550         unsigned char B6 : 1;
22551         unsigned char B5 : 1;
22552         unsigned char B4 : 1;
22553         unsigned char : 1;
22554         unsigned char B2 : 1;
22555         unsigned char B1 : 1;
22556         unsigned char B0 : 1;
22557 #endif
22558     } BIT;
22559     } DSCR;
22560     char            wk6[71];
22561     union {
22562         unsigned char BYTE;
22563         struct {
22564
22565 #ifdef __RX_LITTLE_ENDIAN__
22566         unsigned char B0 : 1;
22567         unsigned char B1 : 1;
22568         unsigned char B2 : 1;
22569         unsigned char B3 : 1;
22570         unsigned char B4 : 1;
22571         unsigned char B5 : 1;
22572         unsigned char B6 : 1;
22573         unsigned char B7 : 1;
22574 #else
22575         unsigned char B7 : 1;
22576         unsigned char B6 : 1;
22577         unsigned char B5 : 1;
22578         unsigned char B4 : 1;
22579         unsigned char B3 : 1;
22580         unsigned char B2 : 1;
22581         unsigned char B1 : 1;
22582         unsigned char B0 : 1;
22583 #endif
22584     } BIT;
22585     } DSCR2;
22586 } st_port5_t;
22587
22588 typedef struct st_port6 {
22589     union {
22590         unsigned char BYTE;
22591         struct {
22592
22593 #ifdef __RX_LITTLE_ENDIAN__
22594         unsigned char B0 : 1;

```

```
22595         unsigned char B1 : 1;
22596         unsigned char B2 : 1;
22597         unsigned char B3 : 1;
22598         unsigned char B4 : 1;
22599         unsigned char B5 : 1;
22600         unsigned char B6 : 1;
22601         unsigned char B7 : 1;
22602 #else
22603         unsigned char B7 : 1;
22604         unsigned char B6 : 1;
22605         unsigned char B5 : 1;
22606         unsigned char B4 : 1;
22607         unsigned char B3 : 1;
22608         unsigned char B2 : 1;
22609         unsigned char B1 : 1;
22610         unsigned char B0 : 1;
22611 #endif
22612     } BIT;
22613     } PDR;
22614     char          wk0[31];
22615     union {
22616         unsigned char BYTE;
22617         struct {
22618
22619 #ifdef __RX_LITTLE_ENDIAN__
22620         unsigned char B0 : 1;
22621         unsigned char B1 : 1;
22622         unsigned char B2 : 1;
22623         unsigned char B3 : 1;
22624         unsigned char B4 : 1;
22625         unsigned char B5 : 1;
22626         unsigned char B6 : 1;
22627         unsigned char B7 : 1;
22628 #else
22629         unsigned char B7 : 1;
22630         unsigned char B6 : 1;
22631         unsigned char B5 : 1;
22632         unsigned char B4 : 1;
22633         unsigned char B3 : 1;
22634         unsigned char B2 : 1;
22635         unsigned char B1 : 1;
22636         unsigned char B0 : 1;
22637 #endif
22638     } BIT;
22639     } PODR;
22640     char          wk1[31];
22641     union {
22642         unsigned char BYTE;
22643         struct {
22644
22645 #ifdef __RX_LITTLE_ENDIAN__
22646         unsigned char B0 : 1;
22647         unsigned char B1 : 1;
22648         unsigned char B2 : 1;
22649         unsigned char B3 : 1;
22650         unsigned char B4 : 1;
22651         unsigned char B5 : 1;
22652         unsigned char B6 : 1;
22653         unsigned char B7 : 1;
22654 #else
22655         unsigned char B7 : 1;
22656         unsigned char B6 : 1;
22657         unsigned char B5 : 1;
22658         unsigned char B4 : 1;
22659         unsigned char B3 : 1;
22660         unsigned char B2 : 1;
22661         unsigned char B1 : 1;
22662         unsigned char B0 : 1;
22663 #endif
22664     } BIT;
22665     } PIDR;
22666     char          wk2[31];
22667     union {
22668         unsigned char BYTE;
22669         struct {
22670
22671 #ifdef __RX_LITTLE_ENDIAN__
22672         unsigned char B0 : 1;
22673         unsigned char B1 : 1;
22674         unsigned char B2 : 1;
22675         unsigned char B3 : 1;
22676         unsigned char B4 : 1;
22677         unsigned char B5 : 1;
22678         unsigned char B6 : 1;
22679         unsigned char B7 : 1;
22680 #else
22681         unsigned char B7 : 1;
```

```

22682         unsigned char B6 : 1;
22683         unsigned char B5 : 1;
22684         unsigned char B4 : 1;
22685         unsigned char B3 : 1;
22686         unsigned char B2 : 1;
22687         unsigned char B1 : 1;
22688         unsigned char B0 : 1;
22689     #endif
22690     } BIT;
22691     } PMR;
22692     char          wk3[37];
22693     union {
22694         unsigned char BYTE;
22695         struct {
22696
22697     #ifdef __RX_LITTLE_ENDIAN__
22698         unsigned char B0 : 1;
22699         unsigned char  : 1;
22700         unsigned char B2 : 1;
22701         unsigned char  : 1;
22702         unsigned char B4 : 1;
22703         unsigned char  : 1;
22704         unsigned char B6 : 1;
22705         unsigned char  : 1;
22706     #else
22707         unsigned char  : 1;
22708         unsigned char B6 : 1;
22709         unsigned char  : 1;
22710         unsigned char B4 : 1;
22711         unsigned char  : 1;
22712         unsigned char B2 : 1;
22713         unsigned char  : 1;
22714         unsigned char B0 : 1;
22715     #endif
22716     } BIT;
22717     } ODR0;
22718     union {
22719         unsigned char BYTE;
22720         struct {
22721
22722     #ifdef __RX_LITTLE_ENDIAN__
22723         unsigned char B0 : 1;
22724         unsigned char  : 1;
22725         unsigned char B2 : 1;
22726         unsigned char  : 1;
22727         unsigned char B4 : 1;
22728         unsigned char  : 1;
22729         unsigned char B6 : 1;
22730         unsigned char  : 1;
22731     #else
22732         unsigned char  : 1;
22733         unsigned char B6 : 1;
22734         unsigned char  : 1;
22735         unsigned char B4 : 1;
22736         unsigned char  : 1;
22737         unsigned char B2 : 1;
22738         unsigned char  : 1;
22739         unsigned char B0 : 1;
22740     #endif
22741     } BIT;
22742     } ODR1;
22743     char          wk4[56];
22744     union {
22745         unsigned char BYTE;
22746         struct {
22747
22748     #ifdef __RX_LITTLE_ENDIAN__
22749         unsigned char B0 : 1;
22750         unsigned char B1 : 1;
22751         unsigned char B2 : 1;
22752         unsigned char B3 : 1;
22753         unsigned char B4 : 1;
22754         unsigned char B5 : 1;
22755         unsigned char B6 : 1;
22756         unsigned char B7 : 1;
22757     #else
22758         unsigned char B7 : 1;
22759         unsigned char B6 : 1;
22760         unsigned char B5 : 1;
22761         unsigned char B4 : 1;
22762         unsigned char B3 : 1;
22763         unsigned char B2 : 1;
22764         unsigned char B1 : 1;
22765         unsigned char B0 : 1;
22766     #endif
22767     } BIT;
22768     } PCR;

```

```

22769     char          wk5[103];
22770     union {
22771         unsigned char BYTE;
22772         struct {
22773
22774 #ifdef __RX_LITTLE_ENDIAN__
22775         unsigned char B0 : 1;
22776         unsigned char B1 : 1;
22777         unsigned char B2 : 1;
22778         unsigned char B3 : 1;
22779         unsigned char B4 : 1;
22780         unsigned char B5 : 1;
22781         unsigned char B6 : 1;
22782         unsigned char B7 : 1;
22783 #else
22784         unsigned char B7 : 1;
22785         unsigned char B6 : 1;
22786         unsigned char B5 : 1;
22787         unsigned char B4 : 1;
22788         unsigned char B3 : 1;
22789         unsigned char B2 : 1;
22790         unsigned char B1 : 1;
22791         unsigned char B0 : 1;
22792 #endif
22793     } BIT;
22794     } DSCR2;
22795 } st_port6_t;
22796
22797 typedef struct st_port7 {
22798     union {
22799         unsigned char BYTE;
22800         struct {
22801
22802 #ifdef __RX_LITTLE_ENDIAN__
22803         unsigned char B0 : 1;
22804         unsigned char B1 : 1;
22805         unsigned char B2 : 1;
22806         unsigned char B3 : 1;
22807         unsigned char B4 : 1;
22808         unsigned char B5 : 1;
22809         unsigned char B6 : 1;
22810         unsigned char B7 : 1;
22811 #else
22812         unsigned char B7 : 1;
22813         unsigned char B6 : 1;
22814         unsigned char B5 : 1;
22815         unsigned char B4 : 1;
22816         unsigned char B3 : 1;
22817         unsigned char B2 : 1;
22818         unsigned char B1 : 1;
22819         unsigned char B0 : 1;
22820 #endif
22821     } BIT;
22822     } PDR;
22823     char          wk0[31];
22824     union {
22825         unsigned char BYTE;
22826         struct {
22827
22828 #ifdef __RX_LITTLE_ENDIAN__
22829         unsigned char B0 : 1;
22830         unsigned char B1 : 1;
22831         unsigned char B2 : 1;
22832         unsigned char B3 : 1;
22833         unsigned char B4 : 1;
22834         unsigned char B5 : 1;
22835         unsigned char B6 : 1;
22836         unsigned char B7 : 1;
22837 #else
22838         unsigned char B7 : 1;
22839         unsigned char B6 : 1;
22840         unsigned char B5 : 1;
22841         unsigned char B4 : 1;
22842         unsigned char B3 : 1;
22843         unsigned char B2 : 1;
22844         unsigned char B1 : 1;
22845         unsigned char B0 : 1;
22846 #endif
22847     } BIT;
22848     } PODR;
22849     char          wk1[31];
22850     union {
22851         unsigned char BYTE;
22852         struct {
22853
22854 #ifdef __RX_LITTLE_ENDIAN__
22855         unsigned char B0 : 1;

```

```
22856         unsigned char B1 : 1;
22857         unsigned char B2 : 1;
22858         unsigned char B3 : 1;
22859         unsigned char B4 : 1;
22860         unsigned char B5 : 1;
22861         unsigned char B6 : 1;
22862         unsigned char B7 : 1;
22863 #else
22864         unsigned char B7 : 1;
22865         unsigned char B6 : 1;
22866         unsigned char B5 : 1;
22867         unsigned char B4 : 1;
22868         unsigned char B3 : 1;
22869         unsigned char B2 : 1;
22870         unsigned char B1 : 1;
22871         unsigned char B0 : 1;
22872 #endif
22873     } BIT;
22874     } PIDR;
22875     char          wk2[31];
22876     union {
22877         unsigned char BYTE;
22878         struct {
22879
22880 #ifdef __RX_LITTLE_ENDIAN__
22881         unsigned char B0 : 1;
22882         unsigned char B1 : 1;
22883         unsigned char B2 : 1;
22884         unsigned char B3 : 1;
22885         unsigned char B4 : 1;
22886         unsigned char B5 : 1;
22887         unsigned char B6 : 1;
22888         unsigned char B7 : 1;
22889 #else
22890         unsigned char B7 : 1;
22891         unsigned char B6 : 1;
22892         unsigned char B5 : 1;
22893         unsigned char B4 : 1;
22894         unsigned char B3 : 1;
22895         unsigned char B2 : 1;
22896         unsigned char B1 : 1;
22897         unsigned char B0 : 1;
22898 #endif
22899     } BIT;
22900     } PMR;
22901     char          wk3[38];
22902     union {
22903         unsigned char BYTE;
22904         struct {
22905
22906 #ifdef __RX_LITTLE_ENDIAN__
22907         unsigned char B0 : 1;
22908         unsigned char  : 1;
22909         unsigned char B2 : 1;
22910         unsigned char  : 1;
22911         unsigned char B4 : 1;
22912         unsigned char  : 1;
22913         unsigned char B6 : 1;
22914         unsigned char  : 1;
22915 #else
22916         unsigned char  : 1;
22917         unsigned char B6 : 1;
22918         unsigned char  : 1;
22919         unsigned char B4 : 1;
22920         unsigned char  : 1;
22921         unsigned char B2 : 1;
22922         unsigned char  : 1;
22923         unsigned char B0 : 1;
22924 #endif
22925     } BIT;
22926     } ODR0;
22927     union {
22928         unsigned char BYTE;
22929         struct {
22930
22931 #ifdef __RX_LITTLE_ENDIAN__
22932         unsigned char B0 : 1;
22933         unsigned char  : 1;
22934         unsigned char B2 : 1;
22935         unsigned char  : 1;
22936         unsigned char B4 : 1;
22937         unsigned char  : 1;
22938         unsigned char B6 : 1;
22939         unsigned char  : 1;
22940 #else
22941         unsigned char  : 1;
22942         unsigned char B6 : 1;
```

```

22943         unsigned char : 1;
22944         unsigned char B4 : 1;
22945         unsigned char : 1;
22946         unsigned char B2 : 1;
22947         unsigned char : 1;
22948         unsigned char B0 : 1;
22949     #endif
22950     } BIT;
22951     } ODR1;
22952     char          wk4[55];
22953     union {
22954         unsigned char BYTE;
22955         struct {
22956
22957     #ifdef __RX_LITTLE_ENDIAN__
22958         unsigned char B0 : 1;
22959         unsigned char B1 : 1;
22960         unsigned char B2 : 1;
22961         unsigned char B3 : 1;
22962         unsigned char B4 : 1;
22963         unsigned char B5 : 1;
22964         unsigned char B6 : 1;
22965         unsigned char B7 : 1;
22966     #else
22967         unsigned char B7 : 1;
22968         unsigned char B6 : 1;
22969         unsigned char B5 : 1;
22970         unsigned char B4 : 1;
22971         unsigned char B3 : 1;
22972         unsigned char B2 : 1;
22973         unsigned char B1 : 1;
22974         unsigned char B0 : 1;
22975     #endif
22976     } BIT;
22977     } PCR;
22978     char          wk5[31];
22979     union {
22980         unsigned char BYTE;
22981         struct {
22982
22983     #ifdef __RX_LITTLE_ENDIAN__
22984         unsigned char : 2;
22985         unsigned char B2 : 1;
22986         unsigned char : 1;
22987         unsigned char B4 : 1;
22988         unsigned char B5 : 1;
22989         unsigned char B6 : 1;
22990         unsigned char B7 : 1;
22991     #else
22992         unsigned char B7 : 1;
22993         unsigned char B6 : 1;
22994         unsigned char B5 : 1;
22995         unsigned char B4 : 1;
22996         unsigned char : 1;
22997         unsigned char B2 : 1;
22998         unsigned char : 2;
22999     #endif
23000     } BIT;
23001     } DSCR;
23002     char          wk6[71];
23003     union {
23004         unsigned char BYTE;
23005         struct {
23006
23007     #ifdef __RX_LITTLE_ENDIAN__
23008         unsigned char B0 : 1;
23009         unsigned char : 1;
23010         unsigned char B2 : 1;
23011         unsigned char B3 : 1;
23012         unsigned char B4 : 1;
23013         unsigned char B5 : 1;
23014         unsigned char B6 : 1;
23015         unsigned char B7 : 1;
23016     #else
23017         unsigned char B7 : 1;
23018         unsigned char B6 : 1;
23019         unsigned char B5 : 1;
23020         unsigned char B4 : 1;
23021         unsigned char B3 : 1;
23022         unsigned char B2 : 1;
23023         unsigned char : 1;
23024         unsigned char B0 : 1;
23025     #endif
23026     } BIT;
23027     } DSCR2;
23028 } st_port7_t;
23029

```

```
23030 typedef struct st_port8 {
23031     union {
23032         unsigned char BYTE;
23033         struct {
23034
23035 #ifdef __RX_LITTLE_ENDIAN__
23036         unsigned char B0 : 1;
23037         unsigned char B1 : 1;
23038         unsigned char B2 : 1;
23039         unsigned char B3 : 1;
23040         unsigned char B4 : 1;
23041         unsigned char B5 : 1;
23042         unsigned char B6 : 1;
23043         unsigned char B7 : 1;
23044 #else
23045         unsigned char B7 : 1;
23046         unsigned char B6 : 1;
23047         unsigned char B5 : 1;
23048         unsigned char B4 : 1;
23049         unsigned char B3 : 1;
23050         unsigned char B2 : 1;
23051         unsigned char B1 : 1;
23052         unsigned char B0 : 1;
23053 #endif
23054     } BIT;
23055     } PDR;
23056     char        wk0[31];
23057     union {
23058         unsigned char BYTE;
23059         struct {
23060
23061 #ifdef __RX_LITTLE_ENDIAN__
23062         unsigned char B0 : 1;
23063         unsigned char B1 : 1;
23064         unsigned char B2 : 1;
23065         unsigned char B3 : 1;
23066         unsigned char B4 : 1;
23067         unsigned char B5 : 1;
23068         unsigned char B6 : 1;
23069         unsigned char B7 : 1;
23070 #else
23071         unsigned char B7 : 1;
23072         unsigned char B6 : 1;
23073         unsigned char B5 : 1;
23074         unsigned char B4 : 1;
23075         unsigned char B3 : 1;
23076         unsigned char B2 : 1;
23077         unsigned char B1 : 1;
23078         unsigned char B0 : 1;
23079 #endif
23080     } PODR;
23081     char        wk1[31];
23082     union {
23083         unsigned char BYTE;
23084         struct {
23085
23086 #ifdef __RX_LITTLE_ENDIAN__
23087         unsigned char B0 : 1;
23088         unsigned char B1 : 1;
23089         unsigned char B2 : 1;
23090         unsigned char B3 : 1;
23091         unsigned char B4 : 1;
23092         unsigned char B5 : 1;
23093         unsigned char B6 : 1;
23094         unsigned char B7 : 1;
23095 #else
23096         unsigned char B7 : 1;
23097         unsigned char B6 : 1;
23098         unsigned char B5 : 1;
23099         unsigned char B4 : 1;
23100         unsigned char B3 : 1;
23101         unsigned char B2 : 1;
23102         unsigned char B1 : 1;
23103         unsigned char B0 : 1;
23104 #endif
23105     } PIDR;
23106     char        wk2[31];
23107     union {
23108         unsigned char BYTE;
23109         struct {
23110
23111 #ifdef __RX_LITTLE_ENDIAN__
23112         unsigned char B0 : 1;
23113         unsigned char B1 : 1;
23114         unsigned char B2 : 1;
```

```

23117         unsigned char B3 : 1;
23118         unsigned char B4 : 1;
23119         unsigned char B5 : 1;
23120         unsigned char B6 : 1;
23121         unsigned char B7 : 1;
23122 #else
23123         unsigned char B7 : 1;
23124         unsigned char B6 : 1;
23125         unsigned char B5 : 1;
23126         unsigned char B4 : 1;
23127         unsigned char B3 : 1;
23128         unsigned char B2 : 1;
23129         unsigned char B1 : 1;
23130         unsigned char B0 : 1;
23131 #endif
23132     } BIT;
23133     } PMR;
23134     char          wk3[39];
23135     union {
23136         unsigned char BYTE;
23137         struct {
23138
23139 #ifdef __RX_LITTLE_ENDIAN__
23140         unsigned char B0 : 1;
23141         unsigned char : 1;
23142         unsigned char B2 : 1;
23143         unsigned char : 1;
23144         unsigned char B4 : 1;
23145         unsigned char : 1;
23146         unsigned char B6 : 1;
23147         unsigned char : 1;
23148 #else
23149         unsigned char : 1;
23150         unsigned char B6 : 1;
23151         unsigned char : 1;
23152         unsigned char B4 : 1;
23153         unsigned char : 1;
23154         unsigned char B2 : 1;
23155         unsigned char : 1;
23156         unsigned char B0 : 1;
23157 #endif
23158     } BIT;
23159     } ODR0;
23160     union {
23161         unsigned char BYTE;
23162         struct {
23163
23164 #ifdef __RX_LITTLE_ENDIAN__
23165         unsigned char B0 : 1;
23166         unsigned char : 1;
23167         unsigned char B2 : 1;
23168         unsigned char : 1;
23169         unsigned char B4 : 1;
23170         unsigned char : 1;
23171         unsigned char B6 : 1;
23172         unsigned char : 1;
23173 #else
23174         unsigned char : 1;
23175         unsigned char B6 : 1;
23176         unsigned char : 1;
23177         unsigned char B4 : 1;
23178         unsigned char : 1;
23179         unsigned char B2 : 1;
23180         unsigned char : 1;
23181         unsigned char B0 : 1;
23182 #endif
23183     } BIT;
23184     } ODR1;
23185     char          wk4[54];
23186     union {
23187         unsigned char BYTE;
23188         struct {
23189
23190 #ifdef __RX_LITTLE_ENDIAN__
23191         unsigned char B0 : 1;
23192         unsigned char B1 : 1;
23193         unsigned char B2 : 1;
23194         unsigned char B3 : 1;
23195         unsigned char B4 : 1;
23196         unsigned char B5 : 1;
23197         unsigned char B6 : 1;
23198         unsigned char B7 : 1;
23199 #else
23200         unsigned char B7 : 1;
23201         unsigned char B6 : 1;
23202         unsigned char B5 : 1;
23203         unsigned char B4 : 1;

```

```

23204         unsigned char B3 : 1;
23205         unsigned char B2 : 1;
23206         unsigned char B1 : 1;
23207         unsigned char B0 : 1;
23208     #endif
23209     } BIT;
23210     } PCR;
23211     char          wk5[31];
23212     union {
23213         unsigned char BYTE;
23214         struct {
23215
23216     #ifdef __RX_LITTLE_ENDIAN__
23217         unsigned char B0 : 1;
23218         unsigned char B1 : 1;
23219         unsigned char B2 : 1;
23220         unsigned char B3 : 1;
23221         unsigned char B4 : 1;
23222         unsigned char B5 : 1;
23223         unsigned char  : 2;
23224     #else
23225         unsigned char  : 2;
23226         unsigned char B5 : 1;
23227         unsigned char B4 : 1;
23228         unsigned char B3 : 1;
23229         unsigned char B2 : 1;
23230         unsigned char B1 : 1;
23231         unsigned char B0 : 1;
23232     #endif
23233     } BIT;
23234     } DSCR;
23235     char          wk6[71];
23236     union {
23237         unsigned char BYTE;
23238         struct {
23239
23240     #ifdef __RX_LITTLE_ENDIAN__
23241         unsigned char B0 : 1;
23242         unsigned char B1 : 1;
23243         unsigned char B2 : 1;
23244         unsigned char B3 : 1;
23245         unsigned char B4 : 1;
23246         unsigned char B5 : 1;
23247         unsigned char  : 1;
23248         unsigned char B7 : 1;
23249     #else
23250         unsigned char B7 : 1;
23251         unsigned char  : 1;
23252         unsigned char B5 : 1;
23253         unsigned char B4 : 1;
23254         unsigned char B3 : 1;
23255         unsigned char B2 : 1;
23256         unsigned char B1 : 1;
23257         unsigned char B0 : 1;
23258     #endif
23259     } BIT;
23260     } DSCR2;
23261 } st_port8_t;
23262
23263 typedef struct st_port9 {
23264     union {
23265         unsigned char BYTE;
23266         struct {
23267
23268     #ifdef __RX_LITTLE_ENDIAN__
23269         unsigned char B0 : 1;
23270         unsigned char B1 : 1;
23271         unsigned char B2 : 1;
23272         unsigned char B3 : 1;
23273         unsigned char B4 : 1;
23274         unsigned char B5 : 1;
23275         unsigned char B6 : 1;
23276         unsigned char B7 : 1;
23277     #else
23278         unsigned char B7 : 1;
23279         unsigned char B6 : 1;
23280         unsigned char B5 : 1;
23281         unsigned char B4 : 1;
23282         unsigned char B3 : 1;
23283         unsigned char B2 : 1;
23284         unsigned char B1 : 1;
23285         unsigned char B0 : 1;
23286     #endif
23287     } BIT;
23288     } PDR;
23289     char          wk0[31];
23290     union {

```

```

23291     unsigned char BYTE;
23292     struct {
23293
23294 #ifdef __RX_LITTLE_ENDIAN__
23295     unsigned char B0 : 1;
23296     unsigned char B1 : 1;
23297     unsigned char B2 : 1;
23298     unsigned char B3 : 1;
23299     unsigned char B4 : 1;
23300     unsigned char B5 : 1;
23301     unsigned char B6 : 1;
23302     unsigned char B7 : 1;
23303 #else
23304     unsigned char B7 : 1;
23305     unsigned char B6 : 1;
23306     unsigned char B5 : 1;
23307     unsigned char B4 : 1;
23308     unsigned char B3 : 1;
23309     unsigned char B2 : 1;
23310     unsigned char B1 : 1;
23311     unsigned char B0 : 1;
23312 #endif
23313     } BIT;
23314     } PODR;
23315     char        wk1[31];
23316     union {
23317     unsigned char BYTE;
23318     struct {
23319
23320 #ifdef __RX_LITTLE_ENDIAN__
23321     unsigned char B0 : 1;
23322     unsigned char B1 : 1;
23323     unsigned char B2 : 1;
23324     unsigned char B3 : 1;
23325     unsigned char B4 : 1;
23326     unsigned char B5 : 1;
23327     unsigned char B6 : 1;
23328     unsigned char B7 : 1;
23329 #else
23330     unsigned char B7 : 1;
23331     unsigned char B6 : 1;
23332     unsigned char B5 : 1;
23333     unsigned char B4 : 1;
23334     unsigned char B3 : 1;
23335     unsigned char B2 : 1;
23336     unsigned char B1 : 1;
23337     unsigned char B0 : 1;
23338 #endif
23339     } BIT;
23340     } PIDR;
23341     char        wk2[31];
23342     union {
23343     unsigned char BYTE;
23344     struct {
23345
23346 #ifdef __RX_LITTLE_ENDIAN__
23347     unsigned char B0 : 1;
23348     unsigned char B1 : 1;
23349     unsigned char B2 : 1;
23350     unsigned char B3 : 1;
23351     unsigned char B4 : 1;
23352     unsigned char B5 : 1;
23353     unsigned char B6 : 1;
23354     unsigned char B7 : 1;
23355 #else
23356     unsigned char B7 : 1;
23357     unsigned char B6 : 1;
23358     unsigned char B5 : 1;
23359     unsigned char B4 : 1;
23360     unsigned char B3 : 1;
23361     unsigned char B2 : 1;
23362     unsigned char B1 : 1;
23363     unsigned char B0 : 1;
23364 #endif
23365     } BIT;
23366     } PMR;
23367     char        wk3[40];
23368     union {
23369     unsigned char BYTE;
23370     struct {
23371
23372 #ifdef __RX_LITTLE_ENDIAN__
23373     unsigned char B0 : 1;
23374     unsigned char B1 : 1;
23375     unsigned char B2 : 1;
23376     unsigned char B3 : 1;
23377     unsigned char B4 : 1;

```

```
23378         unsigned char : 1;
23379         unsigned char B6 : 1;
23380         unsigned char : 1;
23381 #else
23382         unsigned char : 1;
23383         unsigned char B6 : 1;
23384         unsigned char : 1;
23385         unsigned char B4 : 1;
23386         unsigned char : 1;
23387         unsigned char B2 : 1;
23388         unsigned char : 1;
23389         unsigned char B0 : 1;
23390 #endif
23391     } BIT;
23392     } ODR0;
23393     union {
23394         unsigned char BYTE;
23395         struct {
23396
23397 #ifdef __RX_LITTLE_ENDIAN__
23398         unsigned char B0 : 1;
23399         unsigned char : 1;
23400         unsigned char B2 : 1;
23401         unsigned char : 1;
23402         unsigned char B4 : 1;
23403         unsigned char : 1;
23404         unsigned char B6 : 1;
23405         unsigned char : 1;
23406 #else
23407         unsigned char : 1;
23408         unsigned char B6 : 1;
23409         unsigned char : 1;
23410         unsigned char B4 : 1;
23411         unsigned char : 1;
23412         unsigned char B2 : 1;
23413         unsigned char : 1;
23414         unsigned char B0 : 1;
23415 #endif
23416     } BIT;
23417     } ODR1;
23418     char          wk4[53];
23419     union {
23420         unsigned char BYTE;
23421         struct {
23422
23423 #ifdef __RX_LITTLE_ENDIAN__
23424         unsigned char B0 : 1;
23425         unsigned char B1 : 1;
23426         unsigned char B2 : 1;
23427         unsigned char B3 : 1;
23428         unsigned char B4 : 1;
23429         unsigned char B5 : 1;
23430         unsigned char B6 : 1;
23431         unsigned char B7 : 1;
23432 #else
23433         unsigned char B7 : 1;
23434         unsigned char B6 : 1;
23435         unsigned char B5 : 1;
23436         unsigned char B4 : 1;
23437         unsigned char B3 : 1;
23438         unsigned char B2 : 1;
23439         unsigned char B1 : 1;
23440         unsigned char B0 : 1;
23441 #endif
23442     } BIT;
23443     } PCR;
23444     char          wk5[31];
23445     union {
23446         unsigned char BYTE;
23447         struct {
23448
23449 #ifdef __RX_LITTLE_ENDIAN__
23450         unsigned char B0 : 1;
23451         unsigned char B1 : 1;
23452         unsigned char B2 : 1;
23453         unsigned char B3 : 1;
23454         unsigned char B4 : 1;
23455         unsigned char B5 : 1;
23456         unsigned char B6 : 1;
23457         unsigned char B7 : 1;
23458 #else
23459         unsigned char B7 : 1;
23460         unsigned char B6 : 1;
23461         unsigned char B5 : 1;
23462         unsigned char B4 : 1;
23463         unsigned char B3 : 1;
23464         unsigned char B2 : 1;
```

```
23465         unsigned char B1 : 1;
23466         unsigned char B0 : 1;
23467 #endif
23468     } BIT;
23469     } DSCR;
23470     char          wk6[71];
23471     union {
23472         unsigned char BYTE;
23473         struct {
23474
23475 #ifdef __RX_LITTLE_ENDIAN__
23476         unsigned char B0 : 1;
23477         unsigned char B1 : 1;
23478         unsigned char B2 : 1;
23479         unsigned char B3 : 1;
23480         unsigned char B4 : 1;
23481         unsigned char B5 : 1;
23482         unsigned char B6 : 1;
23483         unsigned char B7 : 1;
23484 #else
23485         unsigned char B7 : 1;
23486         unsigned char B6 : 1;
23487         unsigned char B5 : 1;
23488         unsigned char B4 : 1;
23489         unsigned char B3 : 1;
23490         unsigned char B2 : 1;
23491         unsigned char B1 : 1;
23492         unsigned char B0 : 1;
23493 #endif
23494     } BIT;
23495     } DSCR2;
23496 } st_port9_t;
23497
23498 typedef struct st_porta {
23499     union {
23500         unsigned char BYTE;
23501         struct {
23502
23503 #ifdef __RX_LITTLE_ENDIAN__
23504         unsigned char B0 : 1;
23505         unsigned char B1 : 1;
23506         unsigned char B2 : 1;
23507         unsigned char B3 : 1;
23508         unsigned char B4 : 1;
23509         unsigned char B5 : 1;
23510         unsigned char B6 : 1;
23511         unsigned char B7 : 1;
23512 #else
23513         unsigned char B7 : 1;
23514         unsigned char B6 : 1;
23515         unsigned char B5 : 1;
23516         unsigned char B4 : 1;
23517         unsigned char B3 : 1;
23518         unsigned char B2 : 1;
23519         unsigned char B1 : 1;
23520         unsigned char B0 : 1;
23521 #endif
23522     } BIT;
23523     } PDR;
23524     char          wk0[31];
23525     union {
23526         unsigned char BYTE;
23527         struct {
23528
23529 #ifdef __RX_LITTLE_ENDIAN__
23530         unsigned char B0 : 1;
23531         unsigned char B1 : 1;
23532         unsigned char B2 : 1;
23533         unsigned char B3 : 1;
23534         unsigned char B4 : 1;
23535         unsigned char B5 : 1;
23536         unsigned char B6 : 1;
23537         unsigned char B7 : 1;
23538 #else
23539         unsigned char B7 : 1;
23540         unsigned char B6 : 1;
23541         unsigned char B5 : 1;
23542         unsigned char B4 : 1;
23543         unsigned char B3 : 1;
23544         unsigned char B2 : 1;
23545         unsigned char B1 : 1;
23546         unsigned char B0 : 1;
23547 #endif
23548     } BIT;
23549     } PODR;
23550     char          wk1[31];
23551     union {
```

```

23552     unsigned char BYTE;
23553     struct {
23554
23555 #ifdef __RX_LITTLE_ENDIAN__
23556     unsigned char B0 : 1;
23557     unsigned char B1 : 1;
23558     unsigned char B2 : 1;
23559     unsigned char B3 : 1;
23560     unsigned char B4 : 1;
23561     unsigned char B5 : 1;
23562     unsigned char B6 : 1;
23563     unsigned char B7 : 1;
23564 #else
23565     unsigned char B7 : 1;
23566     unsigned char B6 : 1;
23567     unsigned char B5 : 1;
23568     unsigned char B4 : 1;
23569     unsigned char B3 : 1;
23570     unsigned char B2 : 1;
23571     unsigned char B1 : 1;
23572     unsigned char B0 : 1;
23573 #endif
23574     } BIT;
23575     } PIDR;
23576     char          wk2[31];
23577     union {
23578         unsigned char BYTE;
23579         struct {
23580
23581 #ifdef __RX_LITTLE_ENDIAN__
23582         unsigned char B0 : 1;
23583         unsigned char B1 : 1;
23584         unsigned char B2 : 1;
23585         unsigned char B3 : 1;
23586         unsigned char B4 : 1;
23587         unsigned char B5 : 1;
23588         unsigned char B6 : 1;
23589         unsigned char B7 : 1;
23590 #else
23591         unsigned char B7 : 1;
23592         unsigned char B6 : 1;
23593         unsigned char B5 : 1;
23594         unsigned char B4 : 1;
23595         unsigned char B3 : 1;
23596         unsigned char B2 : 1;
23597         unsigned char B1 : 1;
23598         unsigned char B0 : 1;
23599 #endif
23600         } BIT;
23601         } PMR;
23602     char          wk3[41];
23603     union {
23604         unsigned char BYTE;
23605         struct {
23606
23607 #ifdef __RX_LITTLE_ENDIAN__
23608         unsigned char B0 : 1;
23609         unsigned char  : 1;
23610         unsigned char B2 : 1;
23611         unsigned char  : 1;
23612         unsigned char B4 : 1;
23613         unsigned char  : 1;
23614         unsigned char B6 : 1;
23615         unsigned char  : 1;
23616 #else
23617         unsigned char  : 1;
23618         unsigned char B6 : 1;
23619         unsigned char  : 1;
23620         unsigned char B4 : 1;
23621         unsigned char  : 1;
23622         unsigned char B2 : 1;
23623         unsigned char  : 1;
23624         unsigned char B0 : 1;
23625 #endif
23626         } BIT;
23627         } ODR0;
23628     union {
23629         unsigned char BYTE;
23630         struct {
23631
23632 #ifdef __RX_LITTLE_ENDIAN__
23633         unsigned char B0 : 1;
23634         unsigned char  : 1;
23635         unsigned char B2 : 1;
23636         unsigned char  : 1;
23637         unsigned char B4 : 1;
23638         unsigned char  : 1;

```

```
23639         unsigned char B6 : 1;
23640         unsigned char   : 1;
23641 #else
23642         unsigned char   : 1;
23643         unsigned char B6 : 1;
23644         unsigned char   : 1;
23645         unsigned char B4 : 1;
23646         unsigned char   : 1;
23647         unsigned char B2 : 1;
23648         unsigned char   : 1;
23649         unsigned char B0 : 1;
23650 #endif
23651     } BIT;
23652     } ODR1;
23653     char          wk4[52];
23654     union {
23655         unsigned char BYTE;
23656         struct {
23657
23658 #ifdef __RX_LITTLE_ENDIAN__
23659         unsigned char B0 : 1;
23660         unsigned char B1 : 1;
23661         unsigned char B2 : 1;
23662         unsigned char B3 : 1;
23663         unsigned char B4 : 1;
23664         unsigned char B5 : 1;
23665         unsigned char B6 : 1;
23666         unsigned char B7 : 1;
23667 #else
23668         unsigned char B7 : 1;
23669         unsigned char B6 : 1;
23670         unsigned char B5 : 1;
23671         unsigned char B4 : 1;
23672         unsigned char B3 : 1;
23673         unsigned char B2 : 1;
23674         unsigned char B1 : 1;
23675         unsigned char B0 : 1;
23676 #endif
23677     } BIT;
23678     } PCR;
23679     char          wk5[31];
23680     union {
23681         unsigned char BYTE;
23682         struct {
23683
23684 #ifdef __RX_LITTLE_ENDIAN__
23685         unsigned char B0 : 1;
23686         unsigned char B1 : 1;
23687         unsigned char B2 : 1;
23688         unsigned char B3 : 1;
23689         unsigned char B4 : 1;
23690         unsigned char B5 : 1;
23691         unsigned char B6 : 1;
23692         unsigned char B7 : 1;
23693 #else
23694         unsigned char B7 : 1;
23695         unsigned char B6 : 1;
23696         unsigned char B5 : 1;
23697         unsigned char B4 : 1;
23698         unsigned char B3 : 1;
23699         unsigned char B2 : 1;
23700         unsigned char B1 : 1;
23701         unsigned char B0 : 1;
23702 #endif
23703     } BIT;
23704     } DSCR;
23705     char          wk6[71];
23706     union {
23707         unsigned char BYTE;
23708         struct {
23709
23710 #ifdef __RX_LITTLE_ENDIAN__
23711         unsigned char B0 : 1;
23712         unsigned char B1 : 1;
23713         unsigned char B2 : 1;
23714         unsigned char B3 : 1;
23715         unsigned char B4 : 1;
23716         unsigned char B5 : 1;
23717         unsigned char B6 : 1;
23718         unsigned char B7 : 1;
23719 #else
23720         unsigned char B7 : 1;
23721         unsigned char B6 : 1;
23722         unsigned char B5 : 1;
23723         unsigned char B4 : 1;
23724         unsigned char B3 : 1;
23725         unsigned char B2 : 1;
```

```
23726         unsigned char B1 : 1;
23727         unsigned char B0 : 1;
23728 #endif
23729     } BIT;
23730     } DSCR2;
23731 } st_porta_t;
23732
23733 typedef struct st_portb {
23734     union {
23735         unsigned char BYTE;
23736         struct {
23737
23738 #ifdef __RX_LITTLE_ENDIAN__
23739         unsigned char B0 : 1;
23740         unsigned char B1 : 1;
23741         unsigned char B2 : 1;
23742         unsigned char B3 : 1;
23743         unsigned char B4 : 1;
23744         unsigned char B5 : 1;
23745         unsigned char B6 : 1;
23746         unsigned char B7 : 1;
23747 #else
23748         unsigned char B7 : 1;
23749         unsigned char B6 : 1;
23750         unsigned char B5 : 1;
23751         unsigned char B4 : 1;
23752         unsigned char B3 : 1;
23753         unsigned char B2 : 1;
23754         unsigned char B1 : 1;
23755         unsigned char B0 : 1;
23756 #endif
23757     } BIT;
23758     } PDR;
23759     char        wk0[31];
23760     union {
23761         unsigned char BYTE;
23762         struct {
23763
23764 #ifdef __RX_LITTLE_ENDIAN__
23765         unsigned char B0 : 1;
23766         unsigned char B1 : 1;
23767         unsigned char B2 : 1;
23768         unsigned char B3 : 1;
23769         unsigned char B4 : 1;
23770         unsigned char B5 : 1;
23771         unsigned char B6 : 1;
23772         unsigned char B7 : 1;
23773 #else
23774         unsigned char B7 : 1;
23775         unsigned char B6 : 1;
23776         unsigned char B5 : 1;
23777         unsigned char B4 : 1;
23778         unsigned char B3 : 1;
23779         unsigned char B2 : 1;
23780         unsigned char B1 : 1;
23781         unsigned char B0 : 1;
23782 #endif
23783     } BIT;
23784     } PODR;
23785     char        wk1[31];
23786     union {
23787         unsigned char BYTE;
23788         struct {
23789
23790 #ifdef __RX_LITTLE_ENDIAN__
23791         unsigned char B0 : 1;
23792         unsigned char B1 : 1;
23793         unsigned char B2 : 1;
23794         unsigned char B3 : 1;
23795         unsigned char B4 : 1;
23796         unsigned char B5 : 1;
23797         unsigned char B6 : 1;
23798         unsigned char B7 : 1;
23799 #else
23800         unsigned char B7 : 1;
23801         unsigned char B6 : 1;
23802         unsigned char B5 : 1;
23803         unsigned char B4 : 1;
23804         unsigned char B3 : 1;
23805         unsigned char B2 : 1;
23806         unsigned char B1 : 1;
23807         unsigned char B0 : 1;
23808 #endif
23809     } BIT;
23810     } PIDR;
23811     char        wk2[31];
23812     union {
```

```

23813     unsigned char BYTE;
23814     struct {
23815
23816 #ifdef __RX_LITTLE_ENDIAN__
23817     unsigned char B0 : 1;
23818     unsigned char B1 : 1;
23819     unsigned char B2 : 1;
23820     unsigned char B3 : 1;
23821     unsigned char B4 : 1;
23822     unsigned char B5 : 1;
23823     unsigned char B6 : 1;
23824     unsigned char B7 : 1;
23825 #else
23826     unsigned char B7 : 1;
23827     unsigned char B6 : 1;
23828     unsigned char B5 : 1;
23829     unsigned char B4 : 1;
23830     unsigned char B3 : 1;
23831     unsigned char B2 : 1;
23832     unsigned char B1 : 1;
23833     unsigned char B0 : 1;
23834 #endif
23835     } BIT;
23836     } PMR;
23837     char      wk3[42];
23838     union {
23839     unsigned char BYTE;
23840     struct {
23841
23842 #ifdef __RX_LITTLE_ENDIAN__
23843     unsigned char B0 : 1;
23844     unsigned char  : 1;
23845     unsigned char B2 : 1;
23846     unsigned char  : 1;
23847     unsigned char B4 : 1;
23848     unsigned char  : 1;
23849     unsigned char B6 : 1;
23850     unsigned char  : 1;
23851 #else
23852     unsigned char  : 1;
23853     unsigned char B6 : 1;
23854     unsigned char  : 1;
23855     unsigned char B4 : 1;
23856     unsigned char  : 1;
23857     unsigned char B2 : 1;
23858     unsigned char  : 1;
23859     unsigned char B0 : 1;
23860 #endif
23861     } BIT;
23862     } ODR0;
23863     union {
23864     unsigned char BYTE;
23865     struct {
23866
23867 #ifdef __RX_LITTLE_ENDIAN__
23868     unsigned char B0 : 1;
23869     unsigned char  : 1;
23870     unsigned char B2 : 1;
23871     unsigned char  : 1;
23872     unsigned char B4 : 1;
23873     unsigned char  : 1;
23874     unsigned char B6 : 1;
23875     unsigned char  : 1;
23876 #else
23877     unsigned char  : 1;
23878     unsigned char B6 : 1;
23879     unsigned char  : 1;
23880     unsigned char B4 : 1;
23881     unsigned char  : 1;
23882     unsigned char B2 : 1;
23883     unsigned char  : 1;
23884     unsigned char B0 : 1;
23885 #endif
23886     } BIT;
23887     } ODR1;
23888     char      wk4[51];
23889     union {
23890     unsigned char BYTE;
23891     struct {
23892
23893 #ifdef __RX_LITTLE_ENDIAN__
23894     unsigned char B0 : 1;
23895     unsigned char B1 : 1;
23896     unsigned char B2 : 1;
23897     unsigned char B3 : 1;
23898     unsigned char B4 : 1;
23899     unsigned char B5 : 1;

```

```

23900         unsigned char B6 : 1;
23901         unsigned char B7 : 1;
23902 #else
23903         unsigned char B7 : 1;
23904         unsigned char B6 : 1;
23905         unsigned char B5 : 1;
23906         unsigned char B4 : 1;
23907         unsigned char B3 : 1;
23908         unsigned char B2 : 1;
23909         unsigned char B1 : 1;
23910         unsigned char B0 : 1;
23911 #endif
23912     } BIT;
23913     } PCR;
23914     char        wk5[31];
23915     union {
23916         unsigned char BYTE;
23917         struct {
23918
23919 #ifdef __RX_LITTLE_ENDIAN__
23920         unsigned char B0 : 1;
23921         unsigned char B1 : 1;
23922         unsigned char B2 : 1;
23923         unsigned char B3 : 1;
23924         unsigned char B4 : 1;
23925         unsigned char B5 : 1;
23926         unsigned char B6 : 1;
23927         unsigned char B7 : 1;
23928 #else
23929         unsigned char B7 : 1;
23930         unsigned char B6 : 1;
23931         unsigned char B5 : 1;
23932         unsigned char B4 : 1;
23933         unsigned char B3 : 1;
23934         unsigned char B2 : 1;
23935         unsigned char B1 : 1;
23936         unsigned char B0 : 1;
23937 #endif
23938     } BIT;
23939     } DSCR;
23940     char        wk6[71];
23941     union {
23942         unsigned char BYTE;
23943         struct {
23944
23945 #ifdef __RX_LITTLE_ENDIAN__
23946         unsigned char B0 : 1;
23947         unsigned char B1 : 1;
23948         unsigned char B2 : 1;
23949         unsigned char B3 : 1;
23950         unsigned char B4 : 1;
23951         unsigned char B5 : 1;
23952         unsigned char B6 : 1;
23953         unsigned char B7 : 1;
23954 #else
23955         unsigned char B7 : 1;
23956         unsigned char B6 : 1;
23957         unsigned char B5 : 1;
23958         unsigned char B4 : 1;
23959         unsigned char B3 : 1;
23960         unsigned char B2 : 1;
23961         unsigned char B1 : 1;
23962         unsigned char B0 : 1;
23963 #endif
23964     } BIT;
23965     } DSCR2;
23966 } st_portb_t;
23967
23968 typedef struct st_portc {
23969     union {
23970         unsigned char BYTE;
23971         struct {
23972
23973 #ifdef __RX_LITTLE_ENDIAN__
23974         unsigned char B0 : 1;
23975         unsigned char B1 : 1;
23976         unsigned char B2 : 1;
23977         unsigned char B3 : 1;
23978         unsigned char B4 : 1;
23979         unsigned char B5 : 1;
23980         unsigned char B6 : 1;
23981         unsigned char B7 : 1;
23982 #else
23983         unsigned char B7 : 1;
23984         unsigned char B6 : 1;
23985         unsigned char B5 : 1;
23986         unsigned char B4 : 1;

```

```
23987         unsigned char B3 : 1;
23988         unsigned char B2 : 1;
23989         unsigned char B1 : 1;
23990         unsigned char B0 : 1;
23991     #endif
23992     } BIT;
23993     } PDR;
23994     char          wk0[31];
23995     union {
23996         unsigned char BYTE;
23997         struct {
23998
23999     #ifdef __RX_LITTLE_ENDIAN__
24000         unsigned char B0 : 1;
24001         unsigned char B1 : 1;
24002         unsigned char B2 : 1;
24003         unsigned char B3 : 1;
24004         unsigned char B4 : 1;
24005         unsigned char B5 : 1;
24006         unsigned char B6 : 1;
24007         unsigned char B7 : 1;
24008     #else
24009         unsigned char B7 : 1;
24010         unsigned char B6 : 1;
24011         unsigned char B5 : 1;
24012         unsigned char B4 : 1;
24013         unsigned char B3 : 1;
24014         unsigned char B2 : 1;
24015         unsigned char B1 : 1;
24016         unsigned char B0 : 1;
24017     #endif
24018     } BIT;
24019     } PODR;
24020     char          wk1[31];
24021     union {
24022         unsigned char BYTE;
24023         struct {
24024
24025     #ifdef __RX_LITTLE_ENDIAN__
24026         unsigned char B0 : 1;
24027         unsigned char B1 : 1;
24028         unsigned char B2 : 1;
24029         unsigned char B3 : 1;
24030         unsigned char B4 : 1;
24031         unsigned char B5 : 1;
24032         unsigned char B6 : 1;
24033         unsigned char B7 : 1;
24034     #else
24035         unsigned char B7 : 1;
24036         unsigned char B6 : 1;
24037         unsigned char B5 : 1;
24038         unsigned char B4 : 1;
24039         unsigned char B3 : 1;
24040         unsigned char B2 : 1;
24041         unsigned char B1 : 1;
24042         unsigned char B0 : 1;
24043     #endif
24044     } BIT;
24045     } PIDR;
24046     char          wk2[31];
24047     union {
24048         unsigned char BYTE;
24049         struct {
24050
24051     #ifdef __RX_LITTLE_ENDIAN__
24052         unsigned char B0 : 1;
24053         unsigned char B1 : 1;
24054         unsigned char B2 : 1;
24055         unsigned char B3 : 1;
24056         unsigned char B4 : 1;
24057         unsigned char B5 : 1;
24058         unsigned char B6 : 1;
24059         unsigned char B7 : 1;
24060     #else
24061         unsigned char B7 : 1;
24062         unsigned char B6 : 1;
24063         unsigned char B5 : 1;
24064         unsigned char B4 : 1;
24065         unsigned char B3 : 1;
24066         unsigned char B2 : 1;
24067         unsigned char B1 : 1;
24068         unsigned char B0 : 1;
24069     #endif
24070     } BIT;
24071     } PMR;
24072     char          wk3[43];
24073     union {
```

```
24074     unsigned char BYTE;
24075     struct {
24076
24077 #ifdef __RX_LITTLE_ENDIAN__
24078     unsigned char B0 : 1;
24079     unsigned char : 1;
24080     unsigned char B2 : 1;
24081     unsigned char : 1;
24082     unsigned char B4 : 1;
24083     unsigned char : 1;
24084     unsigned char B6 : 1;
24085     unsigned char : 1;
24086 #else
24087     unsigned char : 1;
24088     unsigned char B6 : 1;
24089     unsigned char : 1;
24090     unsigned char B4 : 1;
24091     unsigned char : 1;
24092     unsigned char B2 : 1;
24093     unsigned char : 1;
24094     unsigned char B0 : 1;
24095 #endif
24096     } BIT;
24097     } ODR0;
24098     union {
24099     unsigned char BYTE;
24100     struct {
24101
24102 #ifdef __RX_LITTLE_ENDIAN__
24103     unsigned char B0 : 1;
24104     unsigned char : 1;
24105     unsigned char B2 : 1;
24106     unsigned char : 1;
24107     unsigned char B4 : 1;
24108     unsigned char : 1;
24109     unsigned char B6 : 1;
24110     unsigned char : 1;
24111 #else
24112     unsigned char : 1;
24113     unsigned char B6 : 1;
24114     unsigned char : 1;
24115     unsigned char B4 : 1;
24116     unsigned char : 1;
24117     unsigned char B2 : 1;
24118     unsigned char : 1;
24119     unsigned char B0 : 1;
24120 #endif
24121     } BIT;
24122     } ODR1;
24123     char wk4[50];
24124     union {
24125     unsigned char BYTE;
24126     struct {
24127
24128 #ifdef __RX_LITTLE_ENDIAN__
24129     unsigned char B0 : 1;
24130     unsigned char B1 : 1;
24131     unsigned char B2 : 1;
24132     unsigned char B3 : 1;
24133     unsigned char B4 : 1;
24134     unsigned char B5 : 1;
24135     unsigned char B6 : 1;
24136     unsigned char B7 : 1;
24137 #else
24138     unsigned char B7 : 1;
24139     unsigned char B6 : 1;
24140     unsigned char B5 : 1;
24141     unsigned char B4 : 1;
24142     unsigned char B3 : 1;
24143     unsigned char B2 : 1;
24144     unsigned char B1 : 1;
24145     unsigned char B0 : 1;
24146 #endif
24147     } BIT;
24148     } PCR;
24149     char wk5[31];
24150     union {
24151     unsigned char BYTE;
24152     struct {
24153
24154 #ifdef __RX_LITTLE_ENDIAN__
24155     unsigned char B0 : 1;
24156     unsigned char B1 : 1;
24157     unsigned char B2 : 1;
24158     unsigned char B3 : 1;
24159     unsigned char B4 : 1;
24160     unsigned char B5 : 1;
```

```

24161         unsigned char B6 : 1;
24162         unsigned char B7 : 1;
24163 #else
24164         unsigned char B7 : 1;
24165         unsigned char B6 : 1;
24166         unsigned char B5 : 1;
24167         unsigned char B4 : 1;
24168         unsigned char B3 : 1;
24169         unsigned char B2 : 1;
24170         unsigned char B1 : 1;
24171         unsigned char B0 : 1;
24172 #endif
24173     } BIT;
24174     } DSCR;
24175     char        wk6[71];
24176     union {
24177         unsigned char BYTE;
24178         struct {
24179
24180 #ifdef __RX_LITTLE_ENDIAN__
24181         unsigned char B0 : 1;
24182         unsigned char B1 : 1;
24183         unsigned char B2 : 1;
24184         unsigned char B3 : 1;
24185         unsigned char B4 : 1;
24186         unsigned char B5 : 1;
24187         unsigned char B6 : 1;
24188         unsigned char B7 : 1;
24189 #else
24190         unsigned char B7 : 1;
24191         unsigned char B6 : 1;
24192         unsigned char B5 : 1;
24193         unsigned char B4 : 1;
24194         unsigned char B3 : 1;
24195         unsigned char B2 : 1;
24196         unsigned char B1 : 1;
24197         unsigned char B0 : 1;
24198 #endif
24199     } BIT;
24200     } DSCR2;
24201 } st_portc_t;
24202
24203 typedef struct st_portd {
24204     union {
24205         unsigned char BYTE;
24206         struct {
24207
24208 #ifdef __RX_LITTLE_ENDIAN__
24209         unsigned char B0 : 1;
24210         unsigned char B1 : 1;
24211         unsigned char B2 : 1;
24212         unsigned char B3 : 1;
24213         unsigned char B4 : 1;
24214         unsigned char B5 : 1;
24215         unsigned char B6 : 1;
24216         unsigned char B7 : 1;
24217 #else
24218         unsigned char B7 : 1;
24219         unsigned char B6 : 1;
24220         unsigned char B5 : 1;
24221         unsigned char B4 : 1;
24222         unsigned char B3 : 1;
24223         unsigned char B2 : 1;
24224         unsigned char B1 : 1;
24225         unsigned char B0 : 1;
24226 #endif
24227     } BIT;
24228     } PDR;
24229     char        wk0[31];
24230     union {
24231         unsigned char BYTE;
24232         struct {
24233
24234 #ifdef __RX_LITTLE_ENDIAN__
24235         unsigned char B0 : 1;
24236         unsigned char B1 : 1;
24237         unsigned char B2 : 1;
24238         unsigned char B3 : 1;
24239         unsigned char B4 : 1;
24240         unsigned char B5 : 1;
24241         unsigned char B6 : 1;
24242         unsigned char B7 : 1;
24243 #else
24244         unsigned char B7 : 1;
24245         unsigned char B6 : 1;
24246         unsigned char B5 : 1;
24247         unsigned char B4 : 1;

```

```

24248         unsigned char B3 : 1;
24249         unsigned char B2 : 1;
24250         unsigned char B1 : 1;
24251         unsigned char B0 : 1;
24252     #endif
24253     } BIT;
24254     } PODR;
24255     char          wk1[31];
24256     union {
24257         unsigned char BYTE;
24258         struct {
24259
24260     #ifdef __RX_LITTLE_ENDIAN__
24261         unsigned char B0 : 1;
24262         unsigned char B1 : 1;
24263         unsigned char B2 : 1;
24264         unsigned char B3 : 1;
24265         unsigned char B4 : 1;
24266         unsigned char B5 : 1;
24267         unsigned char B6 : 1;
24268         unsigned char B7 : 1;
24269     #else
24270         unsigned char B7 : 1;
24271         unsigned char B6 : 1;
24272         unsigned char B5 : 1;
24273         unsigned char B4 : 1;
24274         unsigned char B3 : 1;
24275         unsigned char B2 : 1;
24276         unsigned char B1 : 1;
24277         unsigned char B0 : 1;
24278     #endif
24279     } BIT;
24280     } PIDR;
24281     char          wk2[31];
24282     union {
24283         unsigned char BYTE;
24284         struct {
24285
24286     #ifdef __RX_LITTLE_ENDIAN__
24287         unsigned char B0 : 1;
24288         unsigned char B1 : 1;
24289         unsigned char B2 : 1;
24290         unsigned char B3 : 1;
24291         unsigned char B4 : 1;
24292         unsigned char B5 : 1;
24293         unsigned char B6 : 1;
24294         unsigned char B7 : 1;
24295     #else
24296         unsigned char B7 : 1;
24297         unsigned char B6 : 1;
24298         unsigned char B5 : 1;
24299         unsigned char B4 : 1;
24300         unsigned char B3 : 1;
24301         unsigned char B2 : 1;
24302         unsigned char B1 : 1;
24303         unsigned char B0 : 1;
24304     #endif
24305     } BIT;
24306     } PMR;
24307     char          wk3[44];
24308     union {
24309         unsigned char BYTE;
24310         struct {
24311
24312     #ifdef __RX_LITTLE_ENDIAN__
24313         unsigned char B0 : 1;
24314         unsigned char  : 1;
24315         unsigned char B2 : 1;
24316         unsigned char  : 1;
24317         unsigned char B4 : 1;
24318         unsigned char  : 1;
24319         unsigned char B6 : 1;
24320         unsigned char  : 1;
24321     #else
24322         unsigned char  : 1;
24323         unsigned char B6 : 1;
24324         unsigned char  : 1;
24325         unsigned char B4 : 1;
24326         unsigned char  : 1;
24327         unsigned char B2 : 1;
24328         unsigned char  : 1;
24329         unsigned char B0 : 1;
24330     #endif
24331     } BIT;
24332     } ODR0;
24333     union {
24334         unsigned char BYTE;

```

```

24335     struct {
24336
24337 #ifdef __RX_LITTLE_ENDIAN__
24338     unsigned char B0 : 1;
24339     unsigned char : 1;
24340     unsigned char B2 : 1;
24341     unsigned char : 1;
24342     unsigned char B4 : 1;
24343     unsigned char : 1;
24344     unsigned char B6 : 1;
24345     unsigned char : 1;
24346 #else
24347     unsigned char : 1;
24348     unsigned char B6 : 1;
24349     unsigned char : 1;
24350     unsigned char B4 : 1;
24351     unsigned char : 1;
24352     unsigned char B2 : 1;
24353     unsigned char : 1;
24354     unsigned char B0 : 1;
24355 #endif
24356     } BIT;
24357     } ODR1;
24358     char          wk4[49];
24359     union {
24360         unsigned char BYTE;
24361         struct {
24362
24363 #ifdef __RX_LITTLE_ENDIAN__
24364         unsigned char B0 : 1;
24365         unsigned char B1 : 1;
24366         unsigned char B2 : 1;
24367         unsigned char B3 : 1;
24368         unsigned char B4 : 1;
24369         unsigned char B5 : 1;
24370         unsigned char B6 : 1;
24371         unsigned char B7 : 1;
24372 #else
24373         unsigned char B7 : 1;
24374         unsigned char B6 : 1;
24375         unsigned char B5 : 1;
24376         unsigned char B4 : 1;
24377         unsigned char B3 : 1;
24378         unsigned char B2 : 1;
24379         unsigned char B1 : 1;
24380         unsigned char B0 : 1;
24381 #endif
24382         } BIT;
24383         } PCR;
24384         char          wk5[31];
24385         union {
24386             unsigned char BYTE;
24387             struct {
24388
24389 #ifdef __RX_LITTLE_ENDIAN__
24390             unsigned char B0 : 1;
24391             unsigned char B1 : 1;
24392             unsigned char B2 : 1;
24393             unsigned char B3 : 1;
24394             unsigned char B4 : 1;
24395             unsigned char B5 : 1;
24396             unsigned char B6 : 1;
24397             unsigned char B7 : 1;
24398 #else
24399             unsigned char B7 : 1;
24400             unsigned char B6 : 1;
24401             unsigned char B5 : 1;
24402             unsigned char B4 : 1;
24403             unsigned char B3 : 1;
24404             unsigned char B2 : 1;
24405             unsigned char B1 : 1;
24406             unsigned char B0 : 1;
24407 #endif
24408             } BIT;
24409             } DSCR;
24410             char          wk6[71];
24411             union {
24412                 unsigned char BYTE;
24413                 struct {
24414
24415 #ifdef __RX_LITTLE_ENDIAN__
24416                 unsigned char B0 : 1;
24417                 unsigned char B1 : 1;
24418                 unsigned char B2 : 1;
24419                 unsigned char B3 : 1;
24420                 unsigned char B4 : 1;
24421                 unsigned char B5 : 1;

```

```
24422         unsigned char B6 : 1;
24423         unsigned char B7 : 1;
24424 #else
24425         unsigned char B7 : 1;
24426         unsigned char B6 : 1;
24427         unsigned char B5 : 1;
24428         unsigned char B4 : 1;
24429         unsigned char B3 : 1;
24430         unsigned char B2 : 1;
24431         unsigned char B1 : 1;
24432         unsigned char B0 : 1;
24433 #endif
24434     } BIT;
24435     } DSCR2;
24436 } st_portd_t;
24437
24438 typedef struct st_porte {
24439     union {
24440         unsigned char BYTE;
24441         struct {
24442
24443 #ifdef __RX_LITTLE_ENDIAN__
24444         unsigned char B0 : 1;
24445         unsigned char B1 : 1;
24446         unsigned char B2 : 1;
24447         unsigned char B3 : 1;
24448         unsigned char B4 : 1;
24449         unsigned char B5 : 1;
24450         unsigned char B6 : 1;
24451         unsigned char B7 : 1;
24452 #else
24453         unsigned char B7 : 1;
24454         unsigned char B6 : 1;
24455         unsigned char B5 : 1;
24456         unsigned char B4 : 1;
24457         unsigned char B3 : 1;
24458         unsigned char B2 : 1;
24459         unsigned char B1 : 1;
24460         unsigned char B0 : 1;
24461 #endif
24462     } BIT;
24463     } PDR;
24464     char          wk0[31];
24465     union {
24466         unsigned char BYTE;
24467         struct {
24468
24469 #ifdef __RX_LITTLE_ENDIAN__
24470         unsigned char B0 : 1;
24471         unsigned char B1 : 1;
24472         unsigned char B2 : 1;
24473         unsigned char B3 : 1;
24474         unsigned char B4 : 1;
24475         unsigned char B5 : 1;
24476         unsigned char B6 : 1;
24477         unsigned char B7 : 1;
24478 #else
24479         unsigned char B7 : 1;
24480         unsigned char B6 : 1;
24481         unsigned char B5 : 1;
24482         unsigned char B4 : 1;
24483         unsigned char B3 : 1;
24484         unsigned char B2 : 1;
24485         unsigned char B1 : 1;
24486         unsigned char B0 : 1;
24487 #endif
24488     } BIT;
24489     } PODR;
24490     char          wk1[31];
24491     union {
24492         unsigned char BYTE;
24493         struct {
24494
24495 #ifdef __RX_LITTLE_ENDIAN__
24496         unsigned char B0 : 1;
24497         unsigned char B1 : 1;
24498         unsigned char B2 : 1;
24499         unsigned char B3 : 1;
24500         unsigned char B4 : 1;
24501         unsigned char B5 : 1;
24502         unsigned char B6 : 1;
24503         unsigned char B7 : 1;
24504 #else
24505         unsigned char B7 : 1;
24506         unsigned char B6 : 1;
24507         unsigned char B5 : 1;
24508         unsigned char B4 : 1;
```

```
24509         unsigned char B3 : 1;
24510         unsigned char B2 : 1;
24511         unsigned char B1 : 1;
24512         unsigned char B0 : 1;
24513     #endif
24514     } BIT;
24515     } PIDR;
24516     char          wk2[31];
24517     union {
24518         unsigned char BYTE;
24519         struct {
24520
24521     #ifdef __RX_LITTLE_ENDIAN__
24522         unsigned char B0 : 1;
24523         unsigned char B1 : 1;
24524         unsigned char B2 : 1;
24525         unsigned char B3 : 1;
24526         unsigned char B4 : 1;
24527         unsigned char B5 : 1;
24528         unsigned char B6 : 1;
24529         unsigned char B7 : 1;
24530     #else
24531         unsigned char B7 : 1;
24532         unsigned char B6 : 1;
24533         unsigned char B5 : 1;
24534         unsigned char B4 : 1;
24535         unsigned char B3 : 1;
24536         unsigned char B2 : 1;
24537         unsigned char B1 : 1;
24538         unsigned char B0 : 1;
24539     #endif
24540     } BIT;
24541     } PMR;
24542     char          wk3[45];
24543     union {
24544         unsigned char BYTE;
24545         struct {
24546
24547     #ifdef __RX_LITTLE_ENDIAN__
24548         unsigned char B0 : 1;
24549         unsigned char  : 1;
24550         unsigned char B2 : 1;
24551         unsigned char B3 : 1;
24552         unsigned char B4 : 1;
24553         unsigned char  : 1;
24554         unsigned char B6 : 1;
24555         unsigned char  : 1;
24556     #else
24557         unsigned char  : 1;
24558         unsigned char B6 : 1;
24559         unsigned char  : 1;
24560         unsigned char B4 : 1;
24561         unsigned char B3 : 1;
24562         unsigned char B2 : 1;
24563         unsigned char  : 1;
24564         unsigned char B0 : 1;
24565     #endif
24566     } BIT;
24567     } ODR0;
24568     union {
24569         unsigned char BYTE;
24570         struct {
24571
24572     #ifdef __RX_LITTLE_ENDIAN__
24573         unsigned char B0 : 1;
24574         unsigned char  : 1;
24575         unsigned char B2 : 1;
24576         unsigned char  : 1;
24577         unsigned char B4 : 1;
24578         unsigned char  : 1;
24579         unsigned char B6 : 1;
24580         unsigned char  : 1;
24581     #else
24582         unsigned char  : 1;
24583         unsigned char B6 : 1;
24584         unsigned char  : 1;
24585         unsigned char B4 : 1;
24586         unsigned char  : 1;
24587         unsigned char B2 : 1;
24588         unsigned char  : 1;
24589         unsigned char B0 : 1;
24590     #endif
24591     } BIT;
24592     } ODR1;
24593     char          wk4[48];
24594     union {
24595         unsigned char BYTE;
```

```
24596     struct {
24597
24598 #ifdef __RX_LITTLE_ENDIAN__
24599     unsigned char B0 : 1;
24600     unsigned char B1 : 1;
24601     unsigned char B2 : 1;
24602     unsigned char B3 : 1;
24603     unsigned char B4 : 1;
24604     unsigned char B5 : 1;
24605     unsigned char B6 : 1;
24606     unsigned char B7 : 1;
24607 #else
24608     unsigned char B7 : 1;
24609     unsigned char B6 : 1;
24610     unsigned char B5 : 1;
24611     unsigned char B4 : 1;
24612     unsigned char B3 : 1;
24613     unsigned char B2 : 1;
24614     unsigned char B1 : 1;
24615     unsigned char B0 : 1;
24616 #endif
24617     } BIT;
24618     } PCR;
24619     char      wk5[31];
24620     union {
24621         unsigned char BYTE;
24622         struct {
24623
24624 #ifdef __RX_LITTLE_ENDIAN__
24625         unsigned char B0 : 1;
24626         unsigned char B1 : 1;
24627         unsigned char B2 : 1;
24628         unsigned char B3 : 1;
24629         unsigned char B4 : 1;
24630         unsigned char B5 : 1;
24631         unsigned char B6 : 1;
24632         unsigned char B7 : 1;
24633 #else
24634         unsigned char B7 : 1;
24635         unsigned char B6 : 1;
24636         unsigned char B5 : 1;
24637         unsigned char B4 : 1;
24638         unsigned char B3 : 1;
24639         unsigned char B2 : 1;
24640         unsigned char B1 : 1;
24641         unsigned char B0 : 1;
24642 #endif
24643         } BIT;
24644         } DSCR;
24645     char      wk6[71];
24646     union {
24647         unsigned char BYTE;
24648         struct {
24649
24650 #ifdef __RX_LITTLE_ENDIAN__
24651         unsigned char B0 : 1;
24652         unsigned char B1 : 1;
24653         unsigned char B2 : 1;
24654         unsigned char B3 : 1;
24655         unsigned char B4 : 1;
24656         unsigned char B5 : 1;
24657         unsigned char B6 : 1;
24658         unsigned char B7 : 1;
24659 #else
24660         unsigned char B7 : 1;
24661         unsigned char B6 : 1;
24662         unsigned char B5 : 1;
24663         unsigned char B4 : 1;
24664         unsigned char B3 : 1;
24665         unsigned char B2 : 1;
24666         unsigned char B1 : 1;
24667         unsigned char B0 : 1;
24668 #endif
24669         } BIT;
24670         } DSCR2;
24671 } st_porte_t;
24672
24673 typedef struct st_portf {
24674     union {
24675         unsigned char BYTE;
24676         struct {
24677
24678 #ifdef __RX_LITTLE_ENDIAN__
24679         unsigned char B0 : 1;
24680         unsigned char B1 : 1;
24681         unsigned char B2 : 1;
24682         unsigned char B3 : 1;
```

```
24683         unsigned char B4 : 1;
24684         unsigned char B5 : 1;
24685         unsigned char : 2;
24686 #else
24687         unsigned char : 2;
24688         unsigned char B5 : 1;
24689         unsigned char B4 : 1;
24690         unsigned char B3 : 1;
24691         unsigned char B2 : 1;
24692         unsigned char B1 : 1;
24693         unsigned char B0 : 1;
24694 #endif
24695     } BIT;
24696     } PDR;
24697     char          wk0[31];
24698     union {
24699         unsigned char BYTE;
24700         struct {
24701
24702 #ifdef __RX_LITTLE_ENDIAN__
24703         unsigned char B0 : 1;
24704         unsigned char B1 : 1;
24705         unsigned char B2 : 1;
24706         unsigned char B3 : 1;
24707         unsigned char B4 : 1;
24708         unsigned char B5 : 1;
24709         unsigned char : 2;
24710 #else
24711         unsigned char : 2;
24712         unsigned char B5 : 1;
24713         unsigned char B4 : 1;
24714         unsigned char B3 : 1;
24715         unsigned char B2 : 1;
24716         unsigned char B1 : 1;
24717         unsigned char B0 : 1;
24718 #endif
24719     } BIT;
24720     } PODR;
24721     char          wk1[31];
24722     union {
24723         unsigned char BYTE;
24724         struct {
24725
24726 #ifdef __RX_LITTLE_ENDIAN__
24727         unsigned char B0 : 1;
24728         unsigned char B1 : 1;
24729         unsigned char B2 : 1;
24730         unsigned char B3 : 1;
24731         unsigned char B4 : 1;
24732         unsigned char B5 : 1;
24733         unsigned char : 2;
24734 #else
24735         unsigned char : 2;
24736         unsigned char B5 : 1;
24737         unsigned char B4 : 1;
24738         unsigned char B3 : 1;
24739         unsigned char B2 : 1;
24740         unsigned char B1 : 1;
24741         unsigned char B0 : 1;
24742 #endif
24743     } BIT;
24744     } PIDR;
24745     char          wk2[31];
24746     union {
24747         unsigned char BYTE;
24748         struct {
24749
24750 #ifdef __RX_LITTLE_ENDIAN__
24751         unsigned char B0 : 1;
24752         unsigned char B1 : 1;
24753         unsigned char B2 : 1;
24754         unsigned char B3 : 1;
24755         unsigned char B4 : 1;
24756         unsigned char B5 : 1;
24757         unsigned char : 2;
24758 #else
24759         unsigned char : 2;
24760         unsigned char B5 : 1;
24761         unsigned char B4 : 1;
24762         unsigned char B3 : 1;
24763         unsigned char B2 : 1;
24764         unsigned char B1 : 1;
24765         unsigned char B0 : 1;
24766 #endif
24767     } BIT;
24768     } PMR;
24769     char          wk3[46];
```

```
24770     union {
24771         unsigned char BYTE;
24772     struct {
24773
24774 #ifdef __RX_LITTLE_ENDIAN__
24775         unsigned char B0 : 1;
24776         unsigned char : 1;
24777         unsigned char B2 : 1;
24778         unsigned char : 1;
24779         unsigned char B4 : 1;
24780         unsigned char : 1;
24781         unsigned char B6 : 1;
24782         unsigned char : 1;
24783 #else
24784         unsigned char : 1;
24785         unsigned char B6 : 1;
24786         unsigned char : 1;
24787         unsigned char B4 : 1;
24788         unsigned char : 1;
24789         unsigned char B2 : 1;
24790         unsigned char : 1;
24791         unsigned char B0 : 1;
24792 #endif
24793     } BIT;
24794     } ODR0;
24795     union {
24796         unsigned char BYTE;
24797     struct {
24798
24799 #ifdef __RX_LITTLE_ENDIAN__
24800         unsigned char B0 : 1;
24801         unsigned char : 1;
24802         unsigned char B2 : 1;
24803         unsigned char : 5;
24804 #else
24805         unsigned char : 5;
24806         unsigned char B2 : 1;
24807         unsigned char : 1;
24808         unsigned char B0 : 1;
24809 #endif
24810     } BIT;
24811     } ODR1;
24812     char          wk4[47];
24813     union {
24814         unsigned char BYTE;
24815     struct {
24816
24817 #ifdef __RX_LITTLE_ENDIAN__
24818         unsigned char B0 : 1;
24819         unsigned char B1 : 1;
24820         unsigned char B2 : 1;
24821         unsigned char B3 : 1;
24822         unsigned char B4 : 1;
24823         unsigned char B5 : 1;
24824         unsigned char : 2;
24825 #else
24826         unsigned char : 2;
24827         unsigned char B5 : 1;
24828         unsigned char B4 : 1;
24829         unsigned char B3 : 1;
24830         unsigned char B2 : 1;
24831         unsigned char B1 : 1;
24832         unsigned char B0 : 1;
24833 #endif
24834     } BIT;
24835     } PCR;
24836 } st_portf_t;
24837
24838 typedef struct st_portg {
24839     union {
24840         unsigned char BYTE;
24841     struct {
24842
24843 #ifdef __RX_LITTLE_ENDIAN__
24844         unsigned char B0 : 1;
24845         unsigned char B1 : 1;
24846         unsigned char B2 : 1;
24847         unsigned char B3 : 1;
24848         unsigned char B4 : 1;
24849         unsigned char B5 : 1;
24850         unsigned char B6 : 1;
24851         unsigned char B7 : 1;
24852 #else
24853         unsigned char B7 : 1;
24854         unsigned char B6 : 1;
24855         unsigned char B5 : 1;
24856         unsigned char B4 : 1;
```

```
24857         unsigned char B3 : 1;
24858         unsigned char B2 : 1;
24859         unsigned char B1 : 1;
24860         unsigned char B0 : 1;
24861     #endif
24862     } BIT;
24863     } PDR;
24864     char          wk0[31];
24865     union {
24866         unsigned char BYTE;
24867         struct {
24868
24869     #ifdef __RX_LITTLE_ENDIAN__
24870         unsigned char B0 : 1;
24871         unsigned char B1 : 1;
24872         unsigned char B2 : 1;
24873         unsigned char B3 : 1;
24874         unsigned char B4 : 1;
24875         unsigned char B5 : 1;
24876         unsigned char B6 : 1;
24877         unsigned char B7 : 1;
24878     #else
24879         unsigned char B7 : 1;
24880         unsigned char B6 : 1;
24881         unsigned char B5 : 1;
24882         unsigned char B4 : 1;
24883         unsigned char B3 : 1;
24884         unsigned char B2 : 1;
24885         unsigned char B1 : 1;
24886         unsigned char B0 : 1;
24887     #endif
24888     } BIT;
24889     } PODR;
24890     char          wk1[31];
24891     union {
24892         unsigned char BYTE;
24893         struct {
24894
24895     #ifdef __RX_LITTLE_ENDIAN__
24896         unsigned char B0 : 1;
24897         unsigned char B1 : 1;
24898         unsigned char B2 : 1;
24899         unsigned char B3 : 1;
24900         unsigned char B4 : 1;
24901         unsigned char B5 : 1;
24902         unsigned char B6 : 1;
24903         unsigned char B7 : 1;
24904     #else
24905         unsigned char B7 : 1;
24906         unsigned char B6 : 1;
24907         unsigned char B5 : 1;
24908         unsigned char B4 : 1;
24909         unsigned char B3 : 1;
24910         unsigned char B2 : 1;
24911         unsigned char B1 : 1;
24912         unsigned char B0 : 1;
24913     #endif
24914     } BIT;
24915     } PIDR;
24916     char          wk2[31];
24917     union {
24918         unsigned char BYTE;
24919         struct {
24920
24921     #ifdef __RX_LITTLE_ENDIAN__
24922         unsigned char B0 : 1;
24923         unsigned char B1 : 1;
24924         unsigned char B2 : 1;
24925         unsigned char B3 : 1;
24926         unsigned char B4 : 1;
24927         unsigned char B5 : 1;
24928         unsigned char B6 : 1;
24929         unsigned char B7 : 1;
24930     #else
24931         unsigned char B7 : 1;
24932         unsigned char B6 : 1;
24933         unsigned char B5 : 1;
24934         unsigned char B4 : 1;
24935         unsigned char B3 : 1;
24936         unsigned char B2 : 1;
24937         unsigned char B1 : 1;
24938         unsigned char B0 : 1;
24939     #endif
24940     } BIT;
24941     } PMR;
24942     char          wk3[47];
24943     union {
```

```

24944     unsigned char BYTE;
24945     struct {
24946
24947 #ifdef __RX_LITTLE_ENDIAN__
24948     unsigned char B0 : 1;
24949     unsigned char : 1;
24950     unsigned char B2 : 1;
24951     unsigned char : 1;
24952     unsigned char B4 : 1;
24953     unsigned char : 1;
24954     unsigned char B6 : 1;
24955     unsigned char : 1;
24956 #else
24957     unsigned char : 1;
24958     unsigned char B6 : 1;
24959     unsigned char : 1;
24960     unsigned char B4 : 1;
24961     unsigned char : 1;
24962     unsigned char B2 : 1;
24963     unsigned char : 1;
24964     unsigned char B0 : 1;
24965 #endif
24966     } BIT;
24967     } ODR0;
24968     union {
24969     unsigned char BYTE;
24970     struct {
24971
24972 #ifdef __RX_LITTLE_ENDIAN__
24973     unsigned char B0 : 1;
24974     unsigned char : 1;
24975     unsigned char B2 : 1;
24976     unsigned char : 1;
24977     unsigned char B4 : 1;
24978     unsigned char : 1;
24979     unsigned char B6 : 1;
24980     unsigned char : 1;
24981 #else
24982     unsigned char : 1;
24983     unsigned char B6 : 1;
24984     unsigned char : 1;
24985     unsigned char B4 : 1;
24986     unsigned char : 1;
24987     unsigned char B2 : 1;
24988     unsigned char : 1;
24989     unsigned char B0 : 1;
24990 #endif
24991     } BIT;
24992     } ODR1;
24993     char          wk4[46];
24994     union {
24995     unsigned char BYTE;
24996     struct {
24997
24998 #ifdef __RX_LITTLE_ENDIAN__
24999     unsigned char B0 : 1;
25000     unsigned char B1 : 1;
25001     unsigned char B2 : 1;
25002     unsigned char B3 : 1;
25003     unsigned char B4 : 1;
25004     unsigned char B5 : 1;
25005     unsigned char B6 : 1;
25006     unsigned char B7 : 1;
25007 #else
25008     unsigned char B7 : 1;
25009     unsigned char B6 : 1;
25010     unsigned char B5 : 1;
25011     unsigned char B4 : 1;
25012     unsigned char B3 : 1;
25013     unsigned char B2 : 1;
25014     unsigned char B1 : 1;
25015     unsigned char B0 : 1;
25016 #endif
25017     } BIT;
25018     } PCR;
25019     char          wk5[31];
25020     union {
25021     unsigned char BYTE;
25022     struct {
25023
25024 #ifdef __RX_LITTLE_ENDIAN__
25025     unsigned char B0 : 1;
25026     unsigned char B1 : 1;
25027     unsigned char : 6;
25028 #else
25029     unsigned char : 6;
25030     unsigned char B1 : 1;

```

```
25031         unsigned char B0 : 1;
25032 #endif
25033     } BIT;
25034     } DSCR;
25035     char          wk6[71];
25036     union {
25037         unsigned char BYTE;
25038         struct {
25039
25040 #ifdef __RX_LITTLE_ENDIAN__
25041         unsigned char B0 : 1;
25042         unsigned char B1 : 1;
25043         unsigned char B2 : 1;
25044         unsigned char B3 : 1;
25045         unsigned char B4 : 1;
25046         unsigned char B5 : 1;
25047         unsigned char B6 : 1;
25048         unsigned char B7 : 1;
25049 #else
25050         unsigned char B7 : 1;
25051         unsigned char B6 : 1;
25052         unsigned char B5 : 1;
25053         unsigned char B4 : 1;
25054         unsigned char B3 : 1;
25055         unsigned char B2 : 1;
25056         unsigned char B1 : 1;
25057         unsigned char B0 : 1;
25058 #endif
25059     } BIT;
25060     } DSCR2;
25061 } st_portg_t;
25062
25063 typedef struct st_porth {
25064     union {
25065         unsigned char BYTE;
25066         struct {
25067
25068 #ifdef __RX_LITTLE_ENDIAN__
25069         unsigned char B0 : 1;
25070         unsigned char B1 : 1;
25071         unsigned char B2 : 1;
25072         unsigned char B3 : 1;
25073         unsigned char B4 : 1;
25074         unsigned char B5 : 1;
25075         unsigned char B6 : 1;
25076         unsigned char B7 : 1;
25077 #else
25078         unsigned char B7 : 1;
25079         unsigned char B6 : 1;
25080         unsigned char B5 : 1;
25081         unsigned char B4 : 1;
25082         unsigned char B3 : 1;
25083         unsigned char B2 : 1;
25084         unsigned char B1 : 1;
25085         unsigned char B0 : 1;
25086 #endif
25087     } BIT;
25088     } PDR;
25089     char          wk0[31];
25090     union {
25091         unsigned char BYTE;
25092         struct {
25093
25094 #ifdef __RX_LITTLE_ENDIAN__
25095         unsigned char B0 : 1;
25096         unsigned char B1 : 1;
25097         unsigned char B2 : 1;
25098         unsigned char B3 : 1;
25099         unsigned char B4 : 1;
25100         unsigned char B5 : 1;
25101         unsigned char B6 : 1;
25102         unsigned char B7 : 1;
25103 #else
25104         unsigned char B7 : 1;
25105         unsigned char B6 : 1;
25106         unsigned char B5 : 1;
25107         unsigned char B4 : 1;
25108         unsigned char B3 : 1;
25109         unsigned char B2 : 1;
25110         unsigned char B1 : 1;
25111         unsigned char B0 : 1;
25112 #endif
25113     } BIT;
25114     } PODR;
25115     char          wk1[31];
25116     union {
25117         unsigned char BYTE;
```

```
25118     struct {
25119
25120 #ifdef __RX_LITTLE_ENDIAN__
25121     unsigned char B0 : 1;
25122     unsigned char B1 : 1;
25123     unsigned char B2 : 1;
25124     unsigned char B3 : 1;
25125     unsigned char B4 : 1;
25126     unsigned char B5 : 1;
25127     unsigned char B6 : 1;
25128     unsigned char B7 : 1;
25129 #else
25130     unsigned char B7 : 1;
25131     unsigned char B6 : 1;
25132     unsigned char B5 : 1;
25133     unsigned char B4 : 1;
25134     unsigned char B3 : 1;
25135     unsigned char B2 : 1;
25136     unsigned char B1 : 1;
25137     unsigned char B0 : 1;
25138 #endif
25139     } BIT;
25140     } PIDR;
25141     char      wk2[31];
25142     union {
25143         unsigned char BYTE;
25144         struct {
25145
25146 #ifdef __RX_LITTLE_ENDIAN__
25147         unsigned char B0 : 1;
25148         unsigned char B1 : 1;
25149         unsigned char B2 : 1;
25150         unsigned char B3 : 1;
25151         unsigned char B4 : 1;
25152         unsigned char B5 : 1;
25153         unsigned char B6 : 1;
25154         unsigned char B7 : 1;
25155 #else
25156         unsigned char B7 : 1;
25157         unsigned char B6 : 1;
25158         unsigned char B5 : 1;
25159         unsigned char B4 : 1;
25160         unsigned char B3 : 1;
25161         unsigned char B2 : 1;
25162         unsigned char B1 : 1;
25163         unsigned char B0 : 1;
25164 #endif
25165         } BIT;
25166         } PMR;
25167     char      wk3[48];
25168     union {
25169         unsigned char BYTE;
25170         struct {
25171
25172 #ifdef __RX_LITTLE_ENDIAN__
25173         unsigned char B0 : 1;
25174         unsigned char  : 1;
25175         unsigned char B2 : 1;
25176         unsigned char  : 1;
25177         unsigned char B4 : 1;
25178         unsigned char  : 1;
25179         unsigned char B6 : 1;
25180         unsigned char  : 1;
25181 #else
25182         unsigned char  : 1;
25183         unsigned char B6 : 1;
25184         unsigned char  : 1;
25185         unsigned char B4 : 1;
25186         unsigned char  : 1;
25187         unsigned char B2 : 1;
25188         unsigned char  : 1;
25189         unsigned char B0 : 1;
25190 #endif
25191         } BIT;
25192         } ODR0;
25193     union {
25194         unsigned char BYTE;
25195         struct {
25196
25197 #ifdef __RX_LITTLE_ENDIAN__
25198         unsigned char B0 : 1;
25199         unsigned char  : 1;
25200         unsigned char B2 : 1;
25201         unsigned char  : 1;
25202         unsigned char B4 : 1;
25203         unsigned char  : 1;
25204         unsigned char B6 : 1;
```

```

25205         unsigned char : 1;
25206 #else
25207         unsigned char : 1;
25208         unsigned char B6 : 1;
25209         unsigned char : 1;
25210         unsigned char B4 : 1;
25211         unsigned char : 1;
25212         unsigned char B2 : 1;
25213         unsigned char : 1;
25214         unsigned char B0 : 1;
25215 #endif
25216     } BIT;
25217     } ODR1;
25218     char          wk4[45];
25219     union {
25220         unsigned char BYTE;
25221         struct {
25222
25223 #ifdef __RX_LITTLE_ENDIAN__
25224         unsigned char B0 : 1;
25225         unsigned char B1 : 1;
25226         unsigned char B2 : 1;
25227         unsigned char B3 : 1;
25228         unsigned char B4 : 1;
25229         unsigned char B5 : 1;
25230         unsigned char B6 : 1;
25231         unsigned char B7 : 1;
25232 #else
25233         unsigned char B7 : 1;
25234         unsigned char B6 : 1;
25235         unsigned char B5 : 1;
25236         unsigned char B4 : 1;
25237         unsigned char B3 : 1;
25238         unsigned char B2 : 1;
25239         unsigned char B1 : 1;
25240         unsigned char B0 : 1;
25241 #endif
25242     } BIT;
25243     } PCR;
25244     char          wk5[31];
25245     union {
25246         unsigned char BYTE;
25247         struct {
25248
25249 #ifdef __RX_LITTLE_ENDIAN__
25250         unsigned char B0 : 1;
25251         unsigned char B1 : 1;
25252         unsigned char B2 : 1;
25253         unsigned char B3 : 1;
25254         unsigned char B4 : 1;
25255         unsigned char B5 : 1;
25256         unsigned char B6 : 1;
25257         unsigned char B7 : 1;
25258 #else
25259         unsigned char B7 : 1;
25260         unsigned char B6 : 1;
25261         unsigned char B5 : 1;
25262         unsigned char B4 : 1;
25263         unsigned char B3 : 1;
25264         unsigned char B2 : 1;
25265         unsigned char B1 : 1;
25266         unsigned char B0 : 1;
25267 #endif
25268     } BIT;
25269     } DSCR;
25270     char          wk6[71];
25271     union {
25272         unsigned char BYTE;
25273         struct {
25274
25275 #ifdef __RX_LITTLE_ENDIAN__
25276         unsigned char B0 : 1;
25277         unsigned char B1 : 1;
25278         unsigned char B2 : 1;
25279         unsigned char B3 : 1;
25280         unsigned char B4 : 1;
25281         unsigned char B5 : 1;
25282         unsigned char B6 : 1;
25283         unsigned char B7 : 1;
25284 #else
25285         unsigned char B7 : 1;
25286         unsigned char B6 : 1;
25287         unsigned char B5 : 1;
25288         unsigned char B4 : 1;
25289         unsigned char B3 : 1;
25290         unsigned char B2 : 1;
25291         unsigned char B1 : 1;

```

```

25292         unsigned char B0 : 1;
25293 #endif
25294     } BIT;
25295     } DSCR2;
25296 } st_porth_t;
25297
25298 typedef struct st_portj {
25299     union {
25300         unsigned char BYTE;
25301         struct {
25302
25303 #ifdef __RX_LITTLE_ENDIAN__
25304         unsigned char B0 : 1;
25305         unsigned char B1 : 1;
25306         unsigned char B2 : 1;
25307         unsigned char B3 : 1;
25308         unsigned char : 1;
25309         unsigned char B5 : 1;
25310         unsigned char : 2;
25311 #else
25312         unsigned char : 2;
25313         unsigned char B5 : 1;
25314         unsigned char : 1;
25315         unsigned char B3 : 1;
25316         unsigned char B2 : 1;
25317         unsigned char B1 : 1;
25318         unsigned char B0 : 1;
25319 #endif
25320     } BIT;
25321     } PDR;
25322     char          wk0[31];
25323     union {
25324         unsigned char BYTE;
25325         struct {
25326
25327 #ifdef __RX_LITTLE_ENDIAN__
25328         unsigned char B0 : 1;
25329         unsigned char B1 : 1;
25330         unsigned char B2 : 1;
25331         unsigned char B3 : 1;
25332         unsigned char : 1;
25333         unsigned char B5 : 1;
25334         unsigned char : 2;
25335 #else
25336         unsigned char : 2;
25337         unsigned char B5 : 1;
25338         unsigned char : 1;
25339         unsigned char B3 : 1;
25340         unsigned char B2 : 1;
25341         unsigned char B1 : 1;
25342         unsigned char B0 : 1;
25343 #endif
25344     } BIT;
25345     } PODR;
25346     char          wk1[31];
25347     union {
25348         unsigned char BYTE;
25349         struct {
25350
25351 #ifdef __RX_LITTLE_ENDIAN__
25352         unsigned char B0 : 1;
25353         unsigned char B1 : 1;
25354         unsigned char B2 : 1;
25355         unsigned char B3 : 1;
25356         unsigned char : 1;
25357         unsigned char B5 : 1;
25358         unsigned char : 2;
25359 #else
25360         unsigned char : 2;
25361         unsigned char B5 : 1;
25362         unsigned char : 1;
25363         unsigned char B3 : 1;
25364         unsigned char B2 : 1;
25365         unsigned char B1 : 1;
25366         unsigned char B0 : 1;
25367 #endif
25368     } BIT;
25369     } PIDR;
25370     char          wk2[31];
25371     union {
25372         unsigned char BYTE;
25373         struct {
25374
25375 #ifdef __RX_LITTLE_ENDIAN__
25376         unsigned char B0 : 1;
25377         unsigned char B1 : 1;
25378         unsigned char B2 : 1;

```

```

25379         unsigned char B3 : 1;
25380         unsigned char : 1;
25381         unsigned char B5 : 1;
25382         unsigned char : 2;
25383 #else
25384         unsigned char : 2;
25385         unsigned char B5 : 1;
25386         unsigned char : 1;
25387         unsigned char B3 : 1;
25388         unsigned char B2 : 1;
25389         unsigned char B1 : 1;
25390         unsigned char B0 : 1;
25391 #endif
25392     } BIT;
25393     } PMR;
25394     char          wk3[49];
25395     union {
25396         unsigned char BYTE;
25397         struct {
25398
25399 #ifdef __RX_LITTLE_ENDIAN__
25400         unsigned char B0 : 1;
25401         unsigned char : 1;
25402         unsigned char B2 : 1;
25403         unsigned char : 1;
25404         unsigned char B4 : 1;
25405         unsigned char : 1;
25406         unsigned char B6 : 1;
25407         unsigned char : 1;
25408 #else
25409         unsigned char : 1;
25410         unsigned char B6 : 1;
25411         unsigned char : 1;
25412         unsigned char B4 : 1;
25413         unsigned char : 1;
25414         unsigned char B2 : 1;
25415         unsigned char : 1;
25416         unsigned char B0 : 1;
25417 #endif
25418     } BIT;
25419     } ODR0;
25420     union {
25421         unsigned char BYTE;
25422         struct {
25423
25424 #ifdef __RX_LITTLE_ENDIAN__
25425         unsigned char : 2;
25426         unsigned char B2 : 1;
25427         unsigned char : 5;
25428 #else
25429         unsigned char : 5;
25430         unsigned char B2 : 1;
25431         unsigned char : 2;
25432 #endif
25433     } BIT;
25434     } ODR1;
25435     char          wk4[44];
25436     union {
25437         unsigned char BYTE;
25438         struct {
25439
25440 #ifdef __RX_LITTLE_ENDIAN__
25441         unsigned char B0 : 1;
25442         unsigned char B1 : 1;
25443         unsigned char B2 : 1;
25444         unsigned char B3 : 1;
25445         unsigned char : 1;
25446         unsigned char B5 : 1;
25447         unsigned char : 2;
25448 #else
25449         unsigned char : 2;
25450         unsigned char B5 : 1;
25451         unsigned char : 1;
25452         unsigned char B3 : 1;
25453         unsigned char B2 : 1;
25454         unsigned char B1 : 1;
25455         unsigned char B0 : 1;
25456 #endif
25457     } BIT;
25458     } PCR;
25459     char          wk5[31];
25460     union {
25461         unsigned char BYTE;
25462         struct {
25463
25464 #ifdef __RX_LITTLE_ENDIAN__
25465         unsigned char B0 : 1;

```

```

25466         unsigned char B1 : 1;
25467         unsigned char B2 : 1;
25468         unsigned char : 5;
25469 #else
25470         unsigned char : 5;
25471         unsigned char B2 : 1;
25472         unsigned char B1 : 1;
25473         unsigned char B0 : 1;
25474 #endif
25475     } BIT;
25476     } DSCR;
25477     char        wk6[71];
25478     union {
25479         unsigned char BYTE;
25480         struct {
25481
25482 #ifdef __RX_LITTLE_ENDIAN__
25483         unsigned char B0 : 1;
25484         unsigned char B1 : 1;
25485         unsigned char B2 : 1;
25486         unsigned char : 5;
25487 #else
25488         unsigned char : 5;
25489         unsigned char B2 : 1;
25490         unsigned char B1 : 1;
25491         unsigned char B0 : 1;
25492 #endif
25493     } BIT;
25494     } DSCR2;
25495 } st_portj_t;
25496
25497 typedef struct st_portk {
25498     union {
25499         unsigned char BYTE;
25500         struct {
25501
25502 #ifdef __RX_LITTLE_ENDIAN__
25503         unsigned char B0 : 1;
25504         unsigned char B1 : 1;
25505         unsigned char B2 : 1;
25506         unsigned char B3 : 1;
25507         unsigned char B4 : 1;
25508         unsigned char B5 : 1;
25509         unsigned char B6 : 1;
25510         unsigned char B7 : 1;
25511 #else
25512         unsigned char B7 : 1;
25513         unsigned char B6 : 1;
25514         unsigned char B5 : 1;
25515         unsigned char B4 : 1;
25516         unsigned char B3 : 1;
25517         unsigned char B2 : 1;
25518         unsigned char B1 : 1;
25519         unsigned char B0 : 1;
25520 #endif
25521     } BIT;
25522     } PDR;
25523     char        wk0[31];
25524     union {
25525         unsigned char BYTE;
25526         struct {
25527
25528 #ifdef __RX_LITTLE_ENDIAN__
25529         unsigned char B0 : 1;
25530         unsigned char B1 : 1;
25531         unsigned char B2 : 1;
25532         unsigned char B3 : 1;
25533         unsigned char B4 : 1;
25534         unsigned char B5 : 1;
25535         unsigned char B6 : 1;
25536         unsigned char B7 : 1;
25537 #else
25538         unsigned char B7 : 1;
25539         unsigned char B6 : 1;
25540         unsigned char B5 : 1;
25541         unsigned char B4 : 1;
25542         unsigned char B3 : 1;
25543         unsigned char B2 : 1;
25544         unsigned char B1 : 1;
25545         unsigned char B0 : 1;
25546 #endif
25547     } BIT;
25548     } PODR;
25549     char        wk1[31];
25550     union {
25551         unsigned char BYTE;
25552         struct {

```

```
25553
25554 #ifdef __RX_LITTLE_ENDIAN__
25555     unsigned char B0 : 1;
25556     unsigned char B1 : 1;
25557     unsigned char B2 : 1;
25558     unsigned char B3 : 1;
25559     unsigned char B4 : 1;
25560     unsigned char B5 : 1;
25561     unsigned char B6 : 1;
25562     unsigned char B7 : 1;
25563 #else
25564     unsigned char B7 : 1;
25565     unsigned char B6 : 1;
25566     unsigned char B5 : 1;
25567     unsigned char B4 : 1;
25568     unsigned char B3 : 1;
25569     unsigned char B2 : 1;
25570     unsigned char B1 : 1;
25571     unsigned char B0 : 1;
25572 #endif
25573 } BIT;
25574 } PIDR;
25575 char          wk2[31];
25576 union {
25577     unsigned char BYTE;
25578     struct {
25579
25580 #ifdef __RX_LITTLE_ENDIAN__
25581     unsigned char B0 : 1;
25582     unsigned char B1 : 1;
25583     unsigned char B2 : 1;
25584     unsigned char B3 : 1;
25585     unsigned char B4 : 1;
25586     unsigned char B5 : 1;
25587     unsigned char B6 : 1;
25588     unsigned char B7 : 1;
25589 #else
25590     unsigned char B7 : 1;
25591     unsigned char B6 : 1;
25592     unsigned char B5 : 1;
25593     unsigned char B4 : 1;
25594     unsigned char B3 : 1;
25595     unsigned char B2 : 1;
25596     unsigned char B1 : 1;
25597     unsigned char B0 : 1;
25598 #endif
25599 } BIT;
25600 } PMR;
25601 char          wk3[50];
25602 union {
25603     unsigned char BYTE;
25604     struct {
25605
25606 #ifdef __RX_LITTLE_ENDIAN__
25607     unsigned char B0 : 1;
25608     unsigned char B1 : 1;
25609     unsigned char B2 : 1;
25610     unsigned char B3 : 1;
25611     unsigned char B4 : 1;
25612     unsigned char B5 : 1;
25613     unsigned char B6 : 1;
25614     unsigned char B7 : 1;
25615 #else
25616     unsigned char B7 : 1;
25617     unsigned char B6 : 1;
25618     unsigned char B5 : 1;
25619     unsigned char B4 : 1;
25620     unsigned char B3 : 1;
25621     unsigned char B2 : 1;
25622     unsigned char B1 : 1;
25623     unsigned char B0 : 1;
25624 #endif
25625 } BIT;
25626 } ODR0;
25627 union {
25628     unsigned char BYTE;
25629     struct {
25630
25631 #ifdef __RX_LITTLE_ENDIAN__
25632     unsigned char B0 : 1;
25633     unsigned char B1 : 1;
25634     unsigned char B2 : 1;
25635     unsigned char B3 : 1;
25636     unsigned char B4 : 1;
25637     unsigned char B5 : 1;
25638     unsigned char B6 : 1;
25639     unsigned char B7 : 1;
```

```
25640 #else
25641     unsigned char : 1;
25642     unsigned char B6 : 1;
25643     unsigned char : 1;
25644     unsigned char B4 : 1;
25645     unsigned char : 1;
25646     unsigned char B2 : 1;
25647     unsigned char : 1;
25648     unsigned char B0 : 1;
25649 #endif
25650 } BIT;
25651 } ODR1;
25652 char      wk4[43];
25653 union {
25654     unsigned char BYTE;
25655     struct {
25656
25657 #ifdef __RX_LITTLE_ENDIAN__
25658     unsigned char B0 : 1;
25659     unsigned char B1 : 1;
25660     unsigned char B2 : 1;
25661     unsigned char B3 : 1;
25662     unsigned char B4 : 1;
25663     unsigned char B5 : 1;
25664     unsigned char B6 : 1;
25665     unsigned char B7 : 1;
25666 #else
25667     unsigned char B7 : 1;
25668     unsigned char B6 : 1;
25669     unsigned char B5 : 1;
25670     unsigned char B4 : 1;
25671     unsigned char B3 : 1;
25672     unsigned char B2 : 1;
25673     unsigned char B1 : 1;
25674     unsigned char B0 : 1;
25675 #endif
25676 } BIT;
25677 } PCR;
25678 char      wk5[31];
25679 union {
25680     unsigned char BYTE;
25681     struct {
25682
25683 #ifdef __RX_LITTLE_ENDIAN__
25684     unsigned char B0 : 1;
25685     unsigned char B1 : 1;
25686     unsigned char B2 : 1;
25687     unsigned char B3 : 1;
25688     unsigned char B4 : 1;
25689     unsigned char B5 : 1;
25690     unsigned char B6 : 1;
25691     unsigned char B7 : 1;
25692 #else
25693     unsigned char B7 : 1;
25694     unsigned char B6 : 1;
25695     unsigned char B5 : 1;
25696     unsigned char B4 : 1;
25697     unsigned char B3 : 1;
25698     unsigned char B2 : 1;
25699     unsigned char B1 : 1;
25700     unsigned char B0 : 1;
25701 #endif
25702 } BIT;
25703 } DSCR;
25704 char      wk6[71];
25705 union {
25706     unsigned char BYTE;
25707     struct {
25708
25709 #ifdef __RX_LITTLE_ENDIAN__
25710     unsigned char B0 : 1;
25711     unsigned char B1 : 1;
25712     unsigned char B2 : 1;
25713     unsigned char B3 : 1;
25714     unsigned char B4 : 1;
25715     unsigned char B5 : 1;
25716     unsigned char B6 : 1;
25717     unsigned char B7 : 1;
25718 #else
25719     unsigned char B7 : 1;
25720     unsigned char B6 : 1;
25721     unsigned char B5 : 1;
25722     unsigned char B4 : 1;
25723     unsigned char B3 : 1;
25724     unsigned char B2 : 1;
25725     unsigned char B1 : 1;
25726     unsigned char B0 : 1;
```

```
25727 #endif
25728     } BIT;
25729     } DSCR2;
25730 } st_portk_t;
25731
25732 typedef struct st_portl {
25733     union {
25734         unsigned char BYTE;
25735         struct {
25736
25737 #ifdef __RX_LITTLE_ENDIAN__
25738         unsigned char B0 : 1;
25739         unsigned char B1 : 1;
25740         unsigned char B2 : 1;
25741         unsigned char B3 : 1;
25742         unsigned char B4 : 1;
25743         unsigned char B5 : 1;
25744         unsigned char B6 : 1;
25745         unsigned char B7 : 1;
25746 #else
25747         unsigned char B7 : 1;
25748         unsigned char B6 : 1;
25749         unsigned char B5 : 1;
25750         unsigned char B4 : 1;
25751         unsigned char B3 : 1;
25752         unsigned char B2 : 1;
25753         unsigned char B1 : 1;
25754         unsigned char B0 : 1;
25755 #endif
25756     } BIT;
25757     } PDR;
25758     char          wk0[31];
25759     union {
25760         unsigned char BYTE;
25761         struct {
25762
25763 #ifdef __RX_LITTLE_ENDIAN__
25764         unsigned char B0 : 1;
25765         unsigned char B1 : 1;
25766         unsigned char B2 : 1;
25767         unsigned char B3 : 1;
25768         unsigned char B4 : 1;
25769         unsigned char B5 : 1;
25770         unsigned char B6 : 1;
25771         unsigned char B7 : 1;
25772 #else
25773         unsigned char B7 : 1;
25774         unsigned char B6 : 1;
25775         unsigned char B5 : 1;
25776         unsigned char B4 : 1;
25777         unsigned char B3 : 1;
25778         unsigned char B2 : 1;
25779         unsigned char B1 : 1;
25780         unsigned char B0 : 1;
25781 #endif
25782     } BIT;
25783     } PODR;
25784     char          wk1[31];
25785     union {
25786         unsigned char BYTE;
25787         struct {
25788
25789 #ifdef __RX_LITTLE_ENDIAN__
25790         unsigned char B0 : 1;
25791         unsigned char B1 : 1;
25792         unsigned char B2 : 1;
25793         unsigned char B3 : 1;
25794         unsigned char B4 : 1;
25795         unsigned char B5 : 1;
25796         unsigned char B6 : 1;
25797         unsigned char B7 : 1;
25798 #else
25799         unsigned char B7 : 1;
25800         unsigned char B6 : 1;
25801         unsigned char B5 : 1;
25802         unsigned char B4 : 1;
25803         unsigned char B3 : 1;
25804         unsigned char B2 : 1;
25805         unsigned char B1 : 1;
25806         unsigned char B0 : 1;
25807 #endif
25808     } BIT;
25809     } PIDR;
25810     char          wk2[31];
25811     union {
25812         unsigned char BYTE;
25813         struct {
```

```
25814
25815 #ifndef __RX_LITTLE_ENDIAN__
25816     unsigned char B0 : 1;
25817     unsigned char B1 : 1;
25818     unsigned char B2 : 1;
25819     unsigned char B3 : 1;
25820     unsigned char B4 : 1;
25821     unsigned char B5 : 1;
25822     unsigned char B6 : 1;
25823     unsigned char B7 : 1;
25824 #else
25825     unsigned char B7 : 1;
25826     unsigned char B6 : 1;
25827     unsigned char B5 : 1;
25828     unsigned char B4 : 1;
25829     unsigned char B3 : 1;
25830     unsigned char B2 : 1;
25831     unsigned char B1 : 1;
25832     unsigned char B0 : 1;
25833 #endif
25834 } BIT;
25835 } PMR;
25836 char      wk3[51];
25837 union {
25838     unsigned char BYTE;
25839     struct {
25840
25841 #ifndef __RX_LITTLE_ENDIAN__
25842     unsigned char B0 : 1;
25843     unsigned char  : 1;
25844     unsigned char B2 : 1;
25845     unsigned char  : 1;
25846     unsigned char B4 : 1;
25847     unsigned char  : 1;
25848     unsigned char B6 : 1;
25849     unsigned char  : 1;
25850 #else
25851     unsigned char  : 1;
25852     unsigned char B6 : 1;
25853     unsigned char  : 1;
25854     unsigned char B4 : 1;
25855     unsigned char  : 1;
25856     unsigned char B2 : 1;
25857     unsigned char  : 1;
25858     unsigned char B0 : 1;
25859 #endif
25860     } BIT;
25861     } ODR0;
25862     union {
25863         unsigned char BYTE;
25864         struct {
25865
25866 #ifndef __RX_LITTLE_ENDIAN__
25867     unsigned char B0 : 1;
25868     unsigned char  : 1;
25869     unsigned char B2 : 1;
25870     unsigned char  : 1;
25871     unsigned char B4 : 1;
25872     unsigned char  : 1;
25873     unsigned char B6 : 1;
25874     unsigned char  : 1;
25875 #else
25876     unsigned char  : 1;
25877     unsigned char B6 : 1;
25878     unsigned char  : 1;
25879     unsigned char B4 : 1;
25880     unsigned char  : 1;
25881     unsigned char B2 : 1;
25882     unsigned char  : 1;
25883     unsigned char B0 : 1;
25884 #endif
25885     } BIT;
25886     } ODR1;
25887     char      wk4[42];
25888     union {
25889         unsigned char BYTE;
25890         struct {
25891
25892 #ifndef __RX_LITTLE_ENDIAN__
25893     unsigned char B0 : 1;
25894     unsigned char B1 : 1;
25895     unsigned char B2 : 1;
25896     unsigned char B3 : 1;
25897     unsigned char B4 : 1;
25898     unsigned char B5 : 1;
25899     unsigned char B6 : 1;
25900     unsigned char B7 : 1;
```

```
25901 #else
25902     unsigned char B7 : 1;
25903     unsigned char B6 : 1;
25904     unsigned char B5 : 1;
25905     unsigned char B4 : 1;
25906     unsigned char B3 : 1;
25907     unsigned char B2 : 1;
25908     unsigned char B1 : 1;
25909     unsigned char B0 : 1;
25910 #endif
25911     } BIT;
25912     } PCR;
25913     char        wk5[31];
25914     union {
25915         unsigned char BYTE;
25916         struct {
25917
25918 #ifdef __RX_LITTLE_ENDIAN__
25919         unsigned char B0 : 1;
25920         unsigned char B1 : 1;
25921         unsigned char B2 : 1;
25922         unsigned char B3 : 1;
25923         unsigned char B4 : 1;
25924         unsigned char B5 : 1;
25925         unsigned char B6 : 1;
25926         unsigned char B7 : 1;
25927 #else
25928         unsigned char B7 : 1;
25929         unsigned char B6 : 1;
25930         unsigned char B5 : 1;
25931         unsigned char B4 : 1;
25932         unsigned char B3 : 1;
25933         unsigned char B2 : 1;
25934         unsigned char B1 : 1;
25935         unsigned char B0 : 1;
25936 #endif
25937     } BIT;
25938     } DSCR;
25939     char        wk6[71];
25940     union {
25941         unsigned char BYTE;
25942         struct {
25943
25944 #ifdef __RX_LITTLE_ENDIAN__
25945         unsigned char B0 : 1;
25946         unsigned char B1 : 1;
25947         unsigned char B2 : 1;
25948         unsigned char B3 : 1;
25949         unsigned char B4 : 1;
25950         unsigned char B5 : 1;
25951         unsigned char B6 : 1;
25952         unsigned char B7 : 1;
25953 #else
25954         unsigned char B7 : 1;
25955         unsigned char B6 : 1;
25956         unsigned char B5 : 1;
25957         unsigned char B4 : 1;
25958         unsigned char B3 : 1;
25959         unsigned char B2 : 1;
25960         unsigned char B1 : 1;
25961         unsigned char B0 : 1;
25962 #endif
25963     } BIT;
25964     } DSCR2;
25965 } st_portl_t;
25966
25967 typedef struct st_portm {
25968     union {
25969         unsigned char BYTE;
25970         struct {
25971
25972 #ifdef __RX_LITTLE_ENDIAN__
25973         unsigned char B0 : 1;
25974         unsigned char B1 : 1;
25975         unsigned char B2 : 1;
25976         unsigned char B3 : 1;
25977         unsigned char B4 : 1;
25978         unsigned char B5 : 1;
25979         unsigned char B6 : 1;
25980         unsigned char B7 : 1;
25981 #else
25982         unsigned char B7 : 1;
25983         unsigned char B6 : 1;
25984         unsigned char B5 : 1;
25985         unsigned char B4 : 1;
25986         unsigned char B3 : 1;
25987         unsigned char B2 : 1;
```

```
25988         unsigned char B1 : 1;
25989         unsigned char B0 : 1;
25990 #endif
25991     } BIT;
25992     } PDR;
25993     char          wk0[31];
25994     union {
25995         unsigned char BYTE;
25996         struct {
25997
25998 #ifdef __RX_LITTLE_ENDIAN__
25999         unsigned char B0 : 1;
26000         unsigned char B1 : 1;
26001         unsigned char B2 : 1;
26002         unsigned char B3 : 1;
26003         unsigned char B4 : 1;
26004         unsigned char B5 : 1;
26005         unsigned char B6 : 1;
26006         unsigned char B7 : 1;
26007 #else
26008         unsigned char B7 : 1;
26009         unsigned char B6 : 1;
26010         unsigned char B5 : 1;
26011         unsigned char B4 : 1;
26012         unsigned char B3 : 1;
26013         unsigned char B2 : 1;
26014         unsigned char B1 : 1;
26015         unsigned char B0 : 1;
26016 #endif
26017     } BIT;
26018     } PODR;
26019     char          wk1[31];
26020     union {
26021         unsigned char BYTE;
26022         struct {
26023
26024 #ifdef __RX_LITTLE_ENDIAN__
26025         unsigned char B0 : 1;
26026         unsigned char B1 : 1;
26027         unsigned char B2 : 1;
26028         unsigned char B3 : 1;
26029         unsigned char B4 : 1;
26030         unsigned char B5 : 1;
26031         unsigned char B6 : 1;
26032         unsigned char B7 : 1;
26033 #else
26034         unsigned char B7 : 1;
26035         unsigned char B6 : 1;
26036         unsigned char B5 : 1;
26037         unsigned char B4 : 1;
26038         unsigned char B3 : 1;
26039         unsigned char B2 : 1;
26040         unsigned char B1 : 1;
26041         unsigned char B0 : 1;
26042 #endif
26043     } BIT;
26044     } PIDR;
26045     char          wk2[31];
26046     union {
26047         unsigned char BYTE;
26048         struct {
26049
26050 #ifdef __RX_LITTLE_ENDIAN__
26051         unsigned char B0 : 1;
26052         unsigned char B1 : 1;
26053         unsigned char B2 : 1;
26054         unsigned char B3 : 1;
26055         unsigned char B4 : 1;
26056         unsigned char B5 : 1;
26057         unsigned char B6 : 1;
26058         unsigned char B7 : 1;
26059 #else
26060         unsigned char B7 : 1;
26061         unsigned char B6 : 1;
26062         unsigned char B5 : 1;
26063         unsigned char B4 : 1;
26064         unsigned char B3 : 1;
26065         unsigned char B2 : 1;
26066         unsigned char B1 : 1;
26067         unsigned char B0 : 1;
26068 #endif
26069     } BIT;
26070     } PMR;
26071     char          wk3[52];
26072     union {
26073         unsigned char BYTE;
26074         struct {
```

```
26075
26076 #ifndef __RX_LITTLE_ENDIAN__
26077     unsigned char B0 : 1;
26078     unsigned char : 1;
26079     unsigned char B2 : 1;
26080     unsigned char : 1;
26081     unsigned char B4 : 1;
26082     unsigned char : 1;
26083     unsigned char B6 : 1;
26084     unsigned char : 1;
26085 #else
26086     unsigned char : 1;
26087     unsigned char B6 : 1;
26088     unsigned char : 1;
26089     unsigned char B4 : 1;
26090     unsigned char : 1;
26091     unsigned char B2 : 1;
26092     unsigned char : 1;
26093     unsigned char B0 : 1;
26094 #endif
26095 } BIT;
26096 } ODR0;
26097 union {
26098     unsigned char BYTE;
26099     struct {
26100
26101 #ifndef __RX_LITTLE_ENDIAN__
26102     unsigned char B0 : 1;
26103     unsigned char : 1;
26104     unsigned char B2 : 1;
26105     unsigned char : 1;
26106     unsigned char B4 : 1;
26107     unsigned char : 1;
26108     unsigned char B6 : 1;
26109     unsigned char : 1;
26110 #else
26111     unsigned char : 1;
26112     unsigned char B6 : 1;
26113     unsigned char : 1;
26114     unsigned char B4 : 1;
26115     unsigned char : 1;
26116     unsigned char B2 : 1;
26117     unsigned char : 1;
26118     unsigned char B0 : 1;
26119 #endif
26120 } BIT;
26121 } ODR1;
26122 char      wk4[41];
26123 union {
26124     unsigned char BYTE;
26125     struct {
26126
26127 #ifndef __RX_LITTLE_ENDIAN__
26128     unsigned char B0 : 1;
26129     unsigned char B1 : 1;
26130     unsigned char B2 : 1;
26131     unsigned char B3 : 1;
26132     unsigned char B4 : 1;
26133     unsigned char B5 : 1;
26134     unsigned char B6 : 1;
26135     unsigned char B7 : 1;
26136 #else
26137     unsigned char B7 : 1;
26138     unsigned char B6 : 1;
26139     unsigned char B5 : 1;
26140     unsigned char B4 : 1;
26141     unsigned char B3 : 1;
26142     unsigned char B2 : 1;
26143     unsigned char B1 : 1;
26144     unsigned char B0 : 1;
26145 #endif
26146 } BIT;
26147 } PCR;
26148 char      wk5[31];
26149 union {
26150     unsigned char BYTE;
26151     struct {
26152
26153 #ifndef __RX_LITTLE_ENDIAN__
26154     unsigned char B0 : 1;
26155     unsigned char B1 : 1;
26156     unsigned char B2 : 1;
26157     unsigned char B3 : 1;
26158     unsigned char B4 : 1;
26159     unsigned char B5 : 1;
26160     unsigned char B6 : 1;
26161     unsigned char B7 : 1;
```

```
26162 #else
26163     unsigned char B7 : 1;
26164     unsigned char B6 : 1;
26165     unsigned char B5 : 1;
26166     unsigned char B4 : 1;
26167     unsigned char B3 : 1;
26168     unsigned char B2 : 1;
26169     unsigned char B1 : 1;
26170     unsigned char B0 : 1;
26171 #endif
26172 } BIT;
26173 } DSCR;
26174 char      wk6[71];
26175 union {
26176     unsigned char BYTE;
26177     struct {
26178
26179 #ifdef __RX_LITTLE_ENDIAN__
26180     unsigned char B0 : 1;
26181     unsigned char B1 : 1;
26182     unsigned char B2 : 1;
26183     unsigned char B3 : 1;
26184     unsigned char B4 : 1;
26185     unsigned char B5 : 1;
26186     unsigned char B6 : 1;
26187     unsigned char B7 : 1;
26188 #else
26189     unsigned char B7 : 1;
26190     unsigned char B6 : 1;
26191     unsigned char B5 : 1;
26192     unsigned char B4 : 1;
26193     unsigned char B3 : 1;
26194     unsigned char B2 : 1;
26195     unsigned char B1 : 1;
26196     unsigned char B0 : 1;
26197 #endif
26198 } BIT;
26199 } DSCR2;
26200 } st_portm_t;
26201
26202 typedef struct st_portn {
26203     union {
26204         unsigned char BYTE;
26205         struct {
26206
26207 #ifdef __RX_LITTLE_ENDIAN__
26208     unsigned char B0 : 1;
26209     unsigned char B1 : 1;
26210     unsigned char B2 : 1;
26211     unsigned char B3 : 1;
26212     unsigned char B4 : 1;
26213     unsigned char B5 : 1;
26214     unsigned char : 2;
26215 #else
26216     unsigned char : 2;
26217     unsigned char B5 : 1;
26218     unsigned char B4 : 1;
26219     unsigned char B3 : 1;
26220     unsigned char B2 : 1;
26221     unsigned char B1 : 1;
26222     unsigned char B0 : 1;
26223 #endif
26224 } BIT;
26225 } PDR;
26226 char      wk0[31];
26227 union {
26228     unsigned char BYTE;
26229     struct {
26230
26231 #ifdef __RX_LITTLE_ENDIAN__
26232     unsigned char B0 : 1;
26233     unsigned char B1 : 1;
26234     unsigned char B2 : 1;
26235     unsigned char B3 : 1;
26236     unsigned char B4 : 1;
26237     unsigned char B5 : 1;
26238     unsigned char : 2;
26239 #else
26240     unsigned char : 2;
26241     unsigned char B5 : 1;
26242     unsigned char B4 : 1;
26243     unsigned char B3 : 1;
26244     unsigned char B2 : 1;
26245     unsigned char B1 : 1;
26246     unsigned char B0 : 1;
26247 #endif
26248 } BIT;
```

```
26249     } PODR;
26250     char          wk1[31];
26251     union {
26252         unsigned char BYTE;
26253         struct {
26254
26255 #ifdef __RX_LITTLE_ENDIAN__
26256         unsigned char B0 : 1;
26257         unsigned char B1 : 1;
26258         unsigned char B2 : 1;
26259         unsigned char B3 : 1;
26260         unsigned char B4 : 1;
26261         unsigned char B5 : 1;
26262         unsigned char  : 2;
26263 #else
26264         unsigned char  : 2;
26265         unsigned char B5 : 1;
26266         unsigned char B4 : 1;
26267         unsigned char B3 : 1;
26268         unsigned char B2 : 1;
26269         unsigned char B1 : 1;
26270         unsigned char B0 : 1;
26271 #endif
26272     } BIT;
26273     } PIDR;
26274     char          wk2[31];
26275     union {
26276         unsigned char BYTE;
26277         struct {
26278
26279 #ifdef __RX_LITTLE_ENDIAN__
26280         unsigned char B0 : 1;
26281         unsigned char B1 : 1;
26282         unsigned char B2 : 1;
26283         unsigned char B3 : 1;
26284         unsigned char B4 : 1;
26285         unsigned char B5 : 1;
26286         unsigned char  : 2;
26287 #else
26288         unsigned char  : 2;
26289         unsigned char B5 : 1;
26290         unsigned char B4 : 1;
26291         unsigned char B3 : 1;
26292         unsigned char B2 : 1;
26293         unsigned char B1 : 1;
26294         unsigned char B0 : 1;
26295 #endif
26296     } BIT;
26297     } PMR;
26298     char          wk3[53];
26299     union {
26300         unsigned char BYTE;
26301         struct {
26302
26303 #ifdef __RX_LITTLE_ENDIAN__
26304         unsigned char B0 : 1;
26305         unsigned char  : 1;
26306         unsigned char B2 : 1;
26307         unsigned char  : 1;
26308         unsigned char B4 : 1;
26309         unsigned char  : 1;
26310         unsigned char B6 : 1;
26311         unsigned char  : 1;
26312 #else
26313         unsigned char  : 1;
26314         unsigned char B6 : 1;
26315         unsigned char  : 1;
26316         unsigned char B4 : 1;
26317         unsigned char  : 1;
26318         unsigned char B2 : 1;
26319         unsigned char  : 1;
26320         unsigned char B0 : 1;
26321 #endif
26322     } BIT;
26323     } ODR0;
26324     union {
26325         unsigned char BYTE;
26326         struct {
26327
26328 #ifdef __RX_LITTLE_ENDIAN__
26329         unsigned char B0 : 1;
26330         unsigned char  : 1;
26331         unsigned char B2 : 1;
26332         unsigned char  : 5;
26333 #else
26334         unsigned char  : 5;
26335         unsigned char B2 : 1;
```

```

26336         unsigned char : 1;
26337         unsigned char B0 : 1;
26338 #endif
26339     } BIT;
26340     } ODR1;
26341     char          wk4[40];
26342     union {
26343         unsigned char BYTE;
26344         struct {
26345
26346 #ifdef __RX_LITTLE_ENDIAN__
26347         unsigned char B0 : 1;
26348         unsigned char B1 : 1;
26349         unsigned char B2 : 1;
26350         unsigned char B3 : 1;
26351         unsigned char B4 : 1;
26352         unsigned char B5 : 1;
26353         unsigned char : 2;
26354 #else
26355         unsigned char : 2;
26356         unsigned char B5 : 1;
26357         unsigned char B4 : 1;
26358         unsigned char B3 : 1;
26359         unsigned char B2 : 1;
26360         unsigned char B1 : 1;
26361         unsigned char B0 : 1;
26362 #endif
26363     } BIT;
26364     } PCR;
26365     char          wk5[31];
26366     union {
26367         unsigned char BYTE;
26368         struct {
26369
26370 #ifdef __RX_LITTLE_ENDIAN__
26371         unsigned char B0 : 1;
26372         unsigned char B1 : 1;
26373         unsigned char B2 : 1;
26374         unsigned char B3 : 1;
26375         unsigned char B4 : 1;
26376         unsigned char B5 : 1;
26377         unsigned char : 2;
26378 #else
26379         unsigned char : 2;
26380         unsigned char B5 : 1;
26381         unsigned char B4 : 1;
26382         unsigned char B3 : 1;
26383         unsigned char B2 : 1;
26384         unsigned char B1 : 1;
26385         unsigned char B0 : 1;
26386 #endif
26387     } BIT;
26388     } DSCR;
26389     char          wk6[71];
26390     union {
26391         unsigned char BYTE;
26392         struct {
26393
26394 #ifdef __RX_LITTLE_ENDIAN__
26395         unsigned char B0 : 1;
26396         unsigned char B1 : 1;
26397         unsigned char B2 : 1;
26398         unsigned char B3 : 1;
26399         unsigned char B4 : 1;
26400         unsigned char B5 : 1;
26401         unsigned char : 2;
26402 #else
26403         unsigned char : 2;
26404         unsigned char B5 : 1;
26405         unsigned char B4 : 1;
26406         unsigned char B3 : 1;
26407         unsigned char B2 : 1;
26408         unsigned char B1 : 1;
26409         unsigned char B0 : 1;
26410 #endif
26411     } BIT;
26412     } DSCR2;
26413 } st_portn_t;
26414
26415 typedef struct st_portq {
26416     union {
26417         unsigned char BYTE;
26418         struct {
26419
26420 #ifdef __RX_LITTLE_ENDIAN__
26421         unsigned char B0 : 1;
26422         unsigned char B1 : 1;

```

```

26423         unsigned char B2 : 1;
26424         unsigned char B3 : 1;
26425         unsigned char B4 : 1;
26426         unsigned char B5 : 1;
26427         unsigned char B6 : 1;
26428         unsigned char B7 : 1;
26429 #else
26430         unsigned char B7 : 1;
26431         unsigned char B6 : 1;
26432         unsigned char B5 : 1;
26433         unsigned char B4 : 1;
26434         unsigned char B3 : 1;
26435         unsigned char B2 : 1;
26436         unsigned char B1 : 1;
26437         unsigned char B0 : 1;
26438 #endif
26439     } BIT;
26440     } PDR;
26441     char          wk0[31];
26442     union {
26443         unsigned char BYTE;
26444         struct {
26445
26446 #ifdef __RX_LITTLE_ENDIAN__
26447         unsigned char B0 : 1;
26448         unsigned char B1 : 1;
26449         unsigned char B2 : 1;
26450         unsigned char B3 : 1;
26451         unsigned char B4 : 1;
26452         unsigned char B5 : 1;
26453         unsigned char B6 : 1;
26454         unsigned char B7 : 1;
26455 #else
26456         unsigned char B7 : 1;
26457         unsigned char B6 : 1;
26458         unsigned char B5 : 1;
26459         unsigned char B4 : 1;
26460         unsigned char B3 : 1;
26461         unsigned char B2 : 1;
26462         unsigned char B1 : 1;
26463         unsigned char B0 : 1;
26464 #endif
26465     } BIT;
26466     } PODR;
26467     char          wk1[31];
26468     union {
26469         unsigned char BYTE;
26470         struct {
26471
26472 #ifdef __RX_LITTLE_ENDIAN__
26473         unsigned char B0 : 1;
26474         unsigned char B1 : 1;
26475         unsigned char B2 : 1;
26476         unsigned char B3 : 1;
26477         unsigned char B4 : 1;
26478         unsigned char B5 : 1;
26479         unsigned char B6 : 1;
26480         unsigned char B7 : 1;
26481 #else
26482         unsigned char B7 : 1;
26483         unsigned char B6 : 1;
26484         unsigned char B5 : 1;
26485         unsigned char B4 : 1;
26486         unsigned char B3 : 1;
26487         unsigned char B2 : 1;
26488         unsigned char B1 : 1;
26489         unsigned char B0 : 1;
26490 #endif
26491     } BIT;
26492     } PIDR;
26493     char          wk2[31];
26494     union {
26495         unsigned char BYTE;
26496         struct {
26497
26498 #ifdef __RX_LITTLE_ENDIAN__
26499         unsigned char B0 : 1;
26500         unsigned char B1 : 1;
26501         unsigned char B2 : 1;
26502         unsigned char B3 : 1;
26503         unsigned char B4 : 1;
26504         unsigned char B5 : 1;
26505         unsigned char B6 : 1;
26506         unsigned char B7 : 1;
26507 #else
26508         unsigned char B7 : 1;
26509         unsigned char B6 : 1;

```

```
26510         unsigned char B5 : 1;
26511         unsigned char B4 : 1;
26512         unsigned char B3 : 1;
26513         unsigned char B2 : 1;
26514         unsigned char B1 : 1;
26515         unsigned char B0 : 1;
26516 #endif
26517     } BIT;
26518     } PMR;
26519     char        wk3[54];
26520     union {
26521         unsigned char BYTE;
26522         struct {
26523
26524 #ifdef __RX_LITTLE_ENDIAN__
26525         unsigned char B0 : 1;
26526         unsigned char  : 1;
26527         unsigned char B2 : 1;
26528         unsigned char  : 1;
26529         unsigned char B4 : 1;
26530         unsigned char  : 1;
26531         unsigned char B6 : 1;
26532         unsigned char  : 1;
26533 #else
26534         unsigned char  : 1;
26535         unsigned char B6 : 1;
26536         unsigned char  : 1;
26537         unsigned char B4 : 1;
26538         unsigned char  : 1;
26539         unsigned char B2 : 1;
26540         unsigned char  : 1;
26541         unsigned char B0 : 1;
26542 #endif
26543     } BIT;
26544     } ODR0;
26545     union {
26546         unsigned char BYTE;
26547         struct {
26548
26549 #ifdef __RX_LITTLE_ENDIAN__
26550         unsigned char B0 : 1;
26551         unsigned char  : 1;
26552         unsigned char B2 : 1;
26553         unsigned char  : 1;
26554         unsigned char B4 : 1;
26555         unsigned char  : 1;
26556         unsigned char B6 : 1;
26557         unsigned char  : 1;
26558 #else
26559         unsigned char  : 1;
26560         unsigned char B6 : 1;
26561         unsigned char  : 1;
26562         unsigned char B4 : 1;
26563         unsigned char  : 1;
26564         unsigned char B2 : 1;
26565         unsigned char  : 1;
26566         unsigned char B0 : 1;
26567 #endif
26568     } BIT;
26569     } ODR1;
26570     char        wk4[39];
26571     union {
26572         unsigned char BYTE;
26573         struct {
26574
26575 #ifdef __RX_LITTLE_ENDIAN__
26576         unsigned char B0 : 1;
26577         unsigned char B1 : 1;
26578         unsigned char B2 : 1;
26579         unsigned char B3 : 1;
26580         unsigned char B4 : 1;
26581         unsigned char B5 : 1;
26582         unsigned char B6 : 1;
26583         unsigned char B7 : 1;
26584 #else
26585         unsigned char B7 : 1;
26586         unsigned char B6 : 1;
26587         unsigned char B5 : 1;
26588         unsigned char B4 : 1;
26589         unsigned char B3 : 1;
26590         unsigned char B2 : 1;
26591         unsigned char B1 : 1;
26592         unsigned char B0 : 1;
26593 #endif
26594     } BIT;
26595     } PCR;
26596     char        wk5[31];
```

```

26597     union {
26598         unsigned char BYTE;
26599     struct {
26600
26601 #ifdef __RX_LITTLE_ENDIAN__
26602     unsigned char B0 : 1;
26603     unsigned char B1 : 1;
26604     unsigned char B2 : 1;
26605     unsigned char B3 : 1;
26606     unsigned char B4 : 1;
26607     unsigned char B5 : 1;
26608     unsigned char B6 : 1;
26609     unsigned char B7 : 1;
26610 #else
26611     unsigned char B7 : 1;
26612     unsigned char B6 : 1;
26613     unsigned char B5 : 1;
26614     unsigned char B4 : 1;
26615     unsigned char B3 : 1;
26616     unsigned char B2 : 1;
26617     unsigned char B1 : 1;
26618     unsigned char B0 : 1;
26619 #endif
26620     } BIT;
26621     } DSCR;
26622     char          wk6[71];
26623     union {
26624         unsigned char BYTE;
26625     struct {
26626
26627 #ifdef __RX_LITTLE_ENDIAN__
26628     unsigned char B0 : 1;
26629     unsigned char B1 : 1;
26630     unsigned char B2 : 1;
26631     unsigned char B3 : 1;
26632     unsigned char B4 : 1;
26633     unsigned char B5 : 1;
26634     unsigned char B6 : 1;
26635     unsigned char B7 : 1;
26636 #else
26637     unsigned char B7 : 1;
26638     unsigned char B6 : 1;
26639     unsigned char B5 : 1;
26640     unsigned char B4 : 1;
26641     unsigned char B3 : 1;
26642     unsigned char B2 : 1;
26643     unsigned char B1 : 1;
26644     unsigned char B0 : 1;
26645 #endif
26646     } BIT;
26647     } DSCR2;
26648 } st_portq_t;
26649
26650 typedef struct st_ppg0 {
26651     union {
26652         unsigned char BYTE;
26653     struct {
26654
26655 #ifdef __RX_LITTLE_ENDIAN__
26656     unsigned char G0CMS : 2;
26657     unsigned char G1CMS : 2;
26658     unsigned char G2CMS : 2;
26659     unsigned char G3CMS : 2;
26660 #else
26661     unsigned char G3CMS : 2;
26662     unsigned char G2CMS : 2;
26663     unsigned char G1CMS : 2;
26664     unsigned char G0CMS : 2;
26665 #endif
26666     } BIT;
26667     } PCR;
26668     union {
26669         unsigned char BYTE;
26670     struct {
26671
26672 #ifdef __RX_LITTLE_ENDIAN__
26673     unsigned char G0NOV : 1;
26674     unsigned char G1NOV : 1;
26675     unsigned char G2NOV : 1;
26676     unsigned char G3NOV : 1;
26677     unsigned char G0INV : 1;
26678     unsigned char G1INV : 1;
26679     unsigned char G2INV : 1;
26680     unsigned char G3INV : 1;
26681 #else
26682     unsigned char G3INV : 1;
26683     unsigned char G2INV : 1;

```

```

26684         unsigned char G1INV : 1;
26685         unsigned char G0INV : 1;
26686         unsigned char G3NOV : 1;
26687         unsigned char G2NOV : 1;
26688         unsigned char G1NOV : 1;
26689         unsigned char G0NOV : 1;
26690     #endif
26691     } BIT;
26692     } PMR;
26693     union {
26694         unsigned char BYTE;
26695         struct {
26696
26697     #ifdef __RX_LITTLE_ENDIAN__
26698         unsigned char NDER8 : 1;
26699         unsigned char NDER9 : 1;
26700         unsigned char NDER10 : 1;
26701         unsigned char NDER11 : 1;
26702         unsigned char NDER12 : 1;
26703         unsigned char NDER13 : 1;
26704         unsigned char NDER14 : 1;
26705         unsigned char NDER15 : 1;
26706     #else
26707         unsigned char NDER15 : 1;
26708         unsigned char NDER14 : 1;
26709         unsigned char NDER13 : 1;
26710         unsigned char NDER12 : 1;
26711         unsigned char NDER11 : 1;
26712         unsigned char NDER10 : 1;
26713         unsigned char NDER9 : 1;
26714         unsigned char NDER8 : 1;
26715     #endif
26716     } BIT;
26717     } NDERH;
26718     union {
26719         unsigned char BYTE;
26720         struct {
26721
26722     #ifdef __RX_LITTLE_ENDIAN__
26723         unsigned char NDER0 : 1;
26724         unsigned char NDER1 : 1;
26725         unsigned char NDER2 : 1;
26726         unsigned char NDER3 : 1;
26727         unsigned char NDER4 : 1;
26728         unsigned char NDER5 : 1;
26729         unsigned char NDER6 : 1;
26730         unsigned char NDER7 : 1;
26731     #else
26732         unsigned char NDER7 : 1;
26733         unsigned char NDER6 : 1;
26734         unsigned char NDER5 : 1;
26735         unsigned char NDER4 : 1;
26736         unsigned char NDER3 : 1;
26737         unsigned char NDER2 : 1;
26738         unsigned char NDER1 : 1;
26739         unsigned char NDER0 : 1;
26740     #endif
26741     } BIT;
26742     } NDERL;
26743     union {
26744         unsigned char BYTE;
26745         struct {
26746
26747     #ifdef __RX_LITTLE_ENDIAN__
26748         unsigned char POD8 : 1;
26749         unsigned char POD9 : 1;
26750         unsigned char POD10 : 1;
26751         unsigned char POD11 : 1;
26752         unsigned char POD12 : 1;
26753         unsigned char POD13 : 1;
26754         unsigned char POD14 : 1;
26755         unsigned char POD15 : 1;
26756     #else
26757         unsigned char POD15 : 1;
26758         unsigned char POD14 : 1;
26759         unsigned char POD13 : 1;
26760         unsigned char POD12 : 1;
26761         unsigned char POD11 : 1;
26762         unsigned char POD10 : 1;
26763         unsigned char POD9 : 1;
26764         unsigned char POD8 : 1;
26765     #endif
26766     } BIT;
26767     } PODRH;
26768     union {
26769         unsigned char BYTE;
26770         struct {

```

```
26771
26772 #ifdef __RX_LITTLE_ENDIAN__
26773     unsigned char POD0 : 1;
26774     unsigned char POD1 : 1;
26775     unsigned char POD2 : 1;
26776     unsigned char POD3 : 1;
26777     unsigned char POD4 : 1;
26778     unsigned char POD5 : 1;
26779     unsigned char POD6 : 1;
26780     unsigned char POD7 : 1;
26781 #else
26782     unsigned char POD7 : 1;
26783     unsigned char POD6 : 1;
26784     unsigned char POD5 : 1;
26785     unsigned char POD4 : 1;
26786     unsigned char POD3 : 1;
26787     unsigned char POD2 : 1;
26788     unsigned char POD1 : 1;
26789     unsigned char POD0 : 1;
26790 #endif
26791 } BIT;
26792 } PODRL;
26793 union {
26794     unsigned char BYTE;
26795     struct {
26796
26797 #ifdef __RX_LITTLE_ENDIAN__
26798     unsigned char NDR8 : 1;
26799     unsigned char NDR9 : 1;
26800     unsigned char NDR10 : 1;
26801     unsigned char NDR11 : 1;
26802     unsigned char NDR12 : 1;
26803     unsigned char NDR13 : 1;
26804     unsigned char NDR14 : 1;
26805     unsigned char NDR15 : 1;
26806 #else
26807     unsigned char NDR15 : 1;
26808     unsigned char NDR14 : 1;
26809     unsigned char NDR13 : 1;
26810     unsigned char NDR12 : 1;
26811     unsigned char NDR11 : 1;
26812     unsigned char NDR10 : 1;
26813     unsigned char NDR9 : 1;
26814     unsigned char NDR8 : 1;
26815 #endif
26816 } BIT;
26817 } NDRH;
26818 union {
26819     unsigned char BYTE;
26820     struct {
26821
26822 #ifdef __RX_LITTLE_ENDIAN__
26823     unsigned char NDR0 : 1;
26824     unsigned char NDR1 : 1;
26825     unsigned char NDR2 : 1;
26826     unsigned char NDR3 : 1;
26827     unsigned char NDR4 : 1;
26828     unsigned char NDR5 : 1;
26829     unsigned char NDR6 : 1;
26830     unsigned char NDR7 : 1;
26831 #else
26832     unsigned char NDR7 : 1;
26833     unsigned char NDR6 : 1;
26834     unsigned char NDR5 : 1;
26835     unsigned char NDR4 : 1;
26836     unsigned char NDR3 : 1;
26837     unsigned char NDR2 : 1;
26838     unsigned char NDR1 : 1;
26839     unsigned char NDR0 : 1;
26840 #endif
26841 } BIT;
26842 } NDRL;
26843 union {
26844     unsigned char BYTE;
26845     struct {
26846
26847 #ifdef __RX_LITTLE_ENDIAN__
26848     unsigned char NDR8 : 1;
26849     unsigned char NDR9 : 1;
26850     unsigned char NDR10 : 1;
26851     unsigned char NDR11 : 1;
26852     unsigned char : 4;
26853 #else
26854     unsigned char : 4;
26855     unsigned char NDR11 : 1;
26856     unsigned char NDR10 : 1;
26857     unsigned char NDR9 : 1;
```

```

26858         unsigned char NDR8 : 1;
26859     #endif
26860     } BIT;
26861     } NDRH2;
26862     union {
26863         unsigned char BYTE;
26864         struct {
26865
26866     #ifdef __RX_LITTLE_ENDIAN__
26867         unsigned char NDR0 : 1;
26868         unsigned char NDR1 : 1;
26869         unsigned char NDR2 : 1;
26870         unsigned char NDR3 : 1;
26871         unsigned char : 4;
26872     #else
26873         unsigned char : 4;
26874         unsigned char NDR3 : 1;
26875         unsigned char NDR2 : 1;
26876         unsigned char NDR1 : 1;
26877         unsigned char NDR0 : 1;
26878     #endif
26879     } BIT;
26880     } NDRL2;
26881 } st_ppg0_t;
26882
26883 typedef struct st_ppg1 {
26884     union {
26885         unsigned char BYTE;
26886         struct {
26887
26888     #ifdef __RX_LITTLE_ENDIAN__
26889         unsigned char PTRSL : 1;
26890         unsigned char : 7;
26891     #else
26892         unsigned char : 7;
26893         unsigned char PTRSL : 1;
26894     #endif
26895     } BIT;
26896     } PTRSLR;
26897     char      wk0[5];
26898     union {
26899         unsigned char BYTE;
26900         struct {
26901
26902     #ifdef __RX_LITTLE_ENDIAN__
26903         unsigned char G0CMS : 2;
26904         unsigned char G1CMS : 2;
26905         unsigned char G2CMS : 2;
26906         unsigned char G3CMS : 2;
26907     #else
26908         unsigned char G3CMS : 2;
26909         unsigned char G2CMS : 2;
26910         unsigned char G1CMS : 2;
26911         unsigned char G0CMS : 2;
26912     #endif
26913     } BIT;
26914     } PCR;
26915     union {
26916         unsigned char BYTE;
26917         struct {
26918
26919     #ifdef __RX_LITTLE_ENDIAN__
26920         unsigned char G0NOV : 1;
26921         unsigned char G1NOV : 1;
26922         unsigned char G2NOV : 1;
26923         unsigned char G3NOV : 1;
26924         unsigned char G0INV : 1;
26925         unsigned char G1INV : 1;
26926         unsigned char G2INV : 1;
26927         unsigned char G3INV : 1;
26928     #else
26929         unsigned char G3INV : 1;
26930         unsigned char G2INV : 1;
26931         unsigned char G1INV : 1;
26932         unsigned char G0INV : 1;
26933         unsigned char G3NOV : 1;
26934         unsigned char G2NOV : 1;
26935         unsigned char G1NOV : 1;
26936         unsigned char G0NOV : 1;
26937     #endif
26938     } BIT;
26939     } PMR;
26940     union {
26941         unsigned char BYTE;
26942         struct {
26943
26944     #ifdef __RX_LITTLE_ENDIAN__

```

```

26945         unsigned char NDER24 : 1;
26946         unsigned char NDER25 : 1;
26947         unsigned char NDER26 : 1;
26948         unsigned char NDER27 : 1;
26949         unsigned char NDER28 : 1;
26950         unsigned char NDER29 : 1;
26951         unsigned char NDER30 : 1;
26952         unsigned char NDER31 : 1;
26953 #else
26954         unsigned char NDER31 : 1;
26955         unsigned char NDER30 : 1;
26956         unsigned char NDER29 : 1;
26957         unsigned char NDER28 : 1;
26958         unsigned char NDER27 : 1;
26959         unsigned char NDER26 : 1;
26960         unsigned char NDER25 : 1;
26961         unsigned char NDER24 : 1;
26962 #endif
26963     } BIT;
26964     } NDERH;
26965     union {
26966         unsigned char BYTE;
26967         struct {
26968
26969 #ifdef __RX_LITTLE_ENDIAN__
26970         unsigned char NDER16 : 1;
26971         unsigned char NDER17 : 1;
26972         unsigned char NDER18 : 1;
26973         unsigned char NDER19 : 1;
26974         unsigned char NDER20 : 1;
26975         unsigned char NDER21 : 1;
26976         unsigned char NDER22 : 1;
26977         unsigned char NDER23 : 1;
26978 #else
26979         unsigned char NDER23 : 1;
26980         unsigned char NDER22 : 1;
26981         unsigned char NDER21 : 1;
26982         unsigned char NDER20 : 1;
26983         unsigned char NDER19 : 1;
26984         unsigned char NDER18 : 1;
26985         unsigned char NDER17 : 1;
26986         unsigned char NDER16 : 1;
26987 #endif
26988     } BIT;
26989     } NDERL;
26990     union {
26991         unsigned char BYTE;
26992         struct {
26993
26994 #ifdef __RX_LITTLE_ENDIAN__
26995         unsigned char POD24 : 1;
26996         unsigned char POD25 : 1;
26997         unsigned char POD26 : 1;
26998         unsigned char POD27 : 1;
26999         unsigned char POD28 : 1;
27000         unsigned char POD29 : 1;
27001         unsigned char POD30 : 1;
27002         unsigned char POD31 : 1;
27003 #else
27004         unsigned char POD31 : 1;
27005         unsigned char POD30 : 1;
27006         unsigned char POD29 : 1;
27007         unsigned char POD28 : 1;
27008         unsigned char POD27 : 1;
27009         unsigned char POD26 : 1;
27010         unsigned char POD25 : 1;
27011         unsigned char POD24 : 1;
27012 #endif
27013     } BIT;
27014     } PODRH;
27015     union {
27016         unsigned char BYTE;
27017         struct {
27018
27019 #ifdef __RX_LITTLE_ENDIAN__
27020         unsigned char POD16 : 1;
27021         unsigned char POD17 : 1;
27022         unsigned char POD18 : 1;
27023         unsigned char POD19 : 1;
27024         unsigned char POD20 : 1;
27025         unsigned char POD21 : 1;
27026         unsigned char POD22 : 1;
27027         unsigned char POD23 : 1;
27028 #else
27029         unsigned char POD23 : 1;
27030         unsigned char POD22 : 1;
27031         unsigned char POD21 : 1;

```

```

27032         unsigned char POD20 : 1;
27033         unsigned char POD19 : 1;
27034         unsigned char POD18 : 1;
27035         unsigned char POD17 : 1;
27036         unsigned char POD16 : 1;
27037     #endif
27038     } BIT;
27039     } PODRL;
27040     union {
27041         unsigned char BYTE;
27042         struct {
27043
27044     #ifdef __RX_LITTLE_ENDIAN__
27045         unsigned char NDR24 : 1;
27046         unsigned char NDR25 : 1;
27047         unsigned char NDR26 : 1;
27048         unsigned char NDR27 : 1;
27049         unsigned char NDR28 : 1;
27050         unsigned char NDR29 : 1;
27051         unsigned char NDR30 : 1;
27052         unsigned char NDR31 : 1;
27053     #else
27054         unsigned char NDR31 : 1;
27055         unsigned char NDR30 : 1;
27056         unsigned char NDR29 : 1;
27057         unsigned char NDR28 : 1;
27058         unsigned char NDR27 : 1;
27059         unsigned char NDR26 : 1;
27060         unsigned char NDR25 : 1;
27061         unsigned char NDR24 : 1;
27062     #endif
27063     } BIT;
27064     } NDRH;
27065     union {
27066         unsigned char BYTE;
27067         struct {
27068
27069     #ifdef __RX_LITTLE_ENDIAN__
27070         unsigned char NDR16 : 1;
27071         unsigned char NDR17 : 1;
27072         unsigned char NDR18 : 1;
27073         unsigned char NDR19 : 1;
27074         unsigned char NDR20 : 1;
27075         unsigned char NDR21 : 1;
27076         unsigned char NDR22 : 1;
27077         unsigned char NDR23 : 1;
27078     #else
27079         unsigned char NDR23 : 1;
27080         unsigned char NDR22 : 1;
27081         unsigned char NDR21 : 1;
27082         unsigned char NDR20 : 1;
27083         unsigned char NDR19 : 1;
27084         unsigned char NDR18 : 1;
27085         unsigned char NDR17 : 1;
27086         unsigned char NDR16 : 1;
27087     #endif
27088     } BIT;
27089     } NDRL;
27090     union {
27091         unsigned char BYTE;
27092         struct {
27093
27094     #ifdef __RX_LITTLE_ENDIAN__
27095         unsigned char NDR24 : 1;
27096         unsigned char NDR25 : 1;
27097         unsigned char NDR26 : 1;
27098         unsigned char NDR27 : 1;
27099         unsigned char : 4;
27100     #else
27101         unsigned char : 4;
27102         unsigned char NDR27 : 1;
27103         unsigned char NDR26 : 1;
27104         unsigned char NDR25 : 1;
27105         unsigned char NDR24 : 1;
27106     #endif
27107     } BIT;
27108     } NDRH2;
27109     union {
27110         unsigned char BYTE;
27111         struct {
27112
27113     #ifdef __RX_LITTLE_ENDIAN__
27114         unsigned char NDR16 : 1;
27115         unsigned char NDR17 : 1;
27116         unsigned char NDR18 : 1;
27117         unsigned char NDR19 : 1;
27118         unsigned char : 4;

```

```

27119 #else
27120     unsigned char : 4;
27121     unsigned char NDR19 : 1;
27122     unsigned char NDR18 : 1;
27123     unsigned char NDR17 : 1;
27124     unsigned char NDR16 : 1;
27125 #endif
27126 } BIT;
27127 } NDRL2;
27128 } st_ppg1_t;
27129
27130 typedef struct st_ptpedmac {
27131     union {
27132         unsigned long LONG;
27133         struct {
27134
27135 #ifdef __RX_LITTLE_ENDIAN__
27136         unsigned long SWR : 1;
27137         unsigned long : 3;
27138         unsigned long DL : 2;
27139         unsigned long DE : 1;
27140         unsigned long : 25;
27141 #else
27142         unsigned long : 25;
27143         unsigned long DE : 1;
27144         unsigned long DL : 2;
27145         unsigned long : 3;
27146         unsigned long SWR : 1;
27147 #endif
27148     } BIT;
27149     } EDMR;
27150     char wk0[4];
27151     union {
27152         unsigned long LONG;
27153         struct {
27154
27155 #ifdef __RX_LITTLE_ENDIAN__
27156         unsigned long TR : 1;
27157         unsigned long : 31;
27158 #else
27159         unsigned long : 31;
27160         unsigned long TR : 1;
27161 #endif
27162     } BIT;
27163     } EDTRR;
27164     char wk1[4];
27165     union {
27166         unsigned long LONG;
27167         struct {
27168
27169 #ifdef __RX_LITTLE_ENDIAN__
27170         unsigned long RR : 1;
27171         unsigned long : 31;
27172 #else
27173         unsigned long : 31;
27174         unsigned long RR : 1;
27175 #endif
27176     } BIT;
27177     } EDRRR;
27178     char wk2[4];
27179     void *TDLAR;
27180     char wk3[4];
27181     void *RDLAR;
27182     char wk4[4];
27183     union {
27184         unsigned long LONG;
27185         struct {
27186
27187 #ifdef __RX_LITTLE_ENDIAN__
27188         unsigned long TYPE : 4;
27189         unsigned long PVER : 1;
27190         unsigned long : 2;
27191         unsigned long RPORT : 1;
27192         unsigned long MACE : 1;
27193         unsigned long : 7;
27194         unsigned long RFOF : 1;
27195         unsigned long RDE : 1;
27196         unsigned long FR : 1;
27197         unsigned long TFUF : 1;
27198         unsigned long TDE : 1;
27199         unsigned long TC : 1;
27200         unsigned long : 2;
27201         unsigned long RFCOF : 1;
27202         unsigned long : 1;
27203         unsigned long TABT : 1;
27204         unsigned long : 3;
27205         unsigned long TWB : 1;

```

```

27206         unsigned long : 1;
27207 #else
27208         unsigned long : 1;
27209         unsigned long TWB : 1;
27210         unsigned long : 3;
27211         unsigned long TABT : 1;
27212         unsigned long : 1;
27213         unsigned long RFCOF : 1;
27214         unsigned long : 2;
27215         unsigned long TC : 1;
27216         unsigned long TDE : 1;
27217         unsigned long TFUF : 1;
27218         unsigned long FR : 1;
27219         unsigned long RDE : 1;
27220         unsigned long RFOF : 1;
27221         unsigned long : 7;
27222         unsigned long MACE : 1;
27223         unsigned long RPORT : 1;
27224         unsigned long : 2;
27225         unsigned long PVER : 1;
27226         unsigned long TYPE : 4;
27227 #endif
27228     } BIT;
27229     } EESR;
27230     char          wk5[4];
27231     union {
27232         unsigned long LONG;
27233         struct {
27234
27235 #ifdef __RX_LITTLE_ENDIAN__
27236         unsigned long : 4;
27237         unsigned long PVERIP : 1;
27238         unsigned long : 2;
27239         unsigned long RPORTIP : 1;
27240         unsigned long MACEIP : 1;
27241         unsigned long : 7;
27242         unsigned long RFOFIP : 1;
27243         unsigned long RDEIP : 1;
27244         unsigned long FRIP : 1;
27245         unsigned long TFUFIP : 1;
27246         unsigned long TDEIP : 1;
27247         unsigned long TCIP : 1;
27248         unsigned long : 2;
27249         unsigned long RFCOFIP : 1;
27250         unsigned long : 1;
27251         unsigned long TABTIP : 1;
27252         unsigned long : 3;
27253         unsigned long TWBIP : 1;
27254         unsigned long : 1;
27255 #else
27256         unsigned long : 1;
27257         unsigned long TWBIP : 1;
27258         unsigned long : 3;
27259         unsigned long TABTIP : 1;
27260         unsigned long : 1;
27261         unsigned long RFCOFIP : 1;
27262         unsigned long : 2;
27263         unsigned long TCIP : 1;
27264         unsigned long TDEIP : 1;
27265         unsigned long TFUFIP : 1;
27266         unsigned long FRIP : 1;
27267         unsigned long RDEIP : 1;
27268         unsigned long RFOFIP : 1;
27269         unsigned long : 7;
27270         unsigned long MACEIP : 1;
27271         unsigned long RPORTIP : 1;
27272         unsigned long : 2;
27273         unsigned long PVERIP : 1;
27274         unsigned long : 4;
27275 #endif
27276     } BIT;
27277     } EESIPR;
27278     char          wk6[12];
27279     union {
27280         unsigned long LONG;
27281         struct {
27282
27283 #ifdef __RX_LITTLE_ENDIAN__
27284         unsigned long MFC : 16;
27285         unsigned long : 16;
27286 #else
27287         unsigned long : 16;
27288         unsigned long MFC : 16;
27289 #endif
27290     } BIT;
27291     } RMFCR;
27292     char          wk7[4];

```

```

27293     union {
27294         unsigned long LONG;
27295     struct {
27296
27297 #ifdef __RX_LITTLE_ENDIAN__
27298     unsigned long TFT : 11;
27299     unsigned long  : 21;
27300 #else
27301     unsigned long  : 21;
27302     unsigned long TFT : 11;
27303 #endif
27304     } BIT;
27305     } TFTR;
27306     char      wk8[4];
27307     union {
27308         unsigned long LONG;
27309     struct {
27310
27311 #ifdef __RX_LITTLE_ENDIAN__
27312     unsigned long RFD : 5;
27313     unsigned long  : 3;
27314     unsigned long TFD : 5;
27315     unsigned long  : 19;
27316 #else
27317     unsigned long  : 19;
27318     unsigned long TFD : 5;
27319     unsigned long  : 3;
27320     unsigned long RFD : 5;
27321 #endif
27322     } BIT;
27323     } FDR;
27324     char      wk9[4];
27325     union {
27326         unsigned long LONG;
27327     struct {
27328
27329 #ifdef __RX_LITTLE_ENDIAN__
27330     unsigned long RNR : 1;
27331     unsigned long  : 31;
27332 #else
27333     unsigned long  : 31;
27334     unsigned long RNR : 1;
27335 #endif
27336     } BIT;
27337     } RMCR;
27338     char      wk10[8];
27339     union {
27340         unsigned long LONG;
27341     struct {
27342
27343 #ifdef __RX_LITTLE_ENDIAN__
27344     unsigned long UNDER : 16;
27345     unsigned long  : 16;
27346 #else
27347     unsigned long  : 16;
27348     unsigned long UNDER : 16;
27349 #endif
27350     } BIT;
27351     } TFUCR;
27352     union {
27353         unsigned long LONG;
27354     struct {
27355
27356 #ifdef __RX_LITTLE_ENDIAN__
27357     unsigned long OVER : 16;
27358     unsigned long  : 16;
27359 #else
27360     unsigned long  : 16;
27361     unsigned long OVER : 16;
27362 #endif
27363     } BIT;
27364     } RFOCR;
27365     char      wk11[4];
27366     union {
27367         unsigned long LONG;
27368     struct {
27369
27370 #ifdef __RX_LITTLE_ENDIAN__
27371     unsigned long RFDO : 3;
27372     unsigned long  : 13;
27373     unsigned long RFFO : 3;
27374     unsigned long  : 13;
27375 #else
27376     unsigned long  : 13;
27377     unsigned long RFFO : 3;
27378     unsigned long  : 13;
27379     unsigned long RFDO : 3;

```

```

27380 #endif
27381     } BIT;
27382     } FCFTR;
27383     char          wk12[4];
27384     union {
27385         unsigned long LONG;
27386         struct {
27387
27388 #ifdef __RX_LITTLE_ENDIAN__
27389         unsigned long PADR : 6;
27390         unsigned long : 10;
27391         unsigned long PADS : 2;
27392         unsigned long : 14;
27393 #else
27394         unsigned long : 14;
27395         unsigned long PADS : 2;
27396         unsigned long : 10;
27397         unsigned long PADR : 6;
27398 #endif
27399     } BIT;
27400     } RPADIR;
27401     union {
27402         unsigned long LONG;
27403         struct {
27404
27405 #ifdef __RX_LITTLE_ENDIAN__
27406         unsigned long TIS : 1;
27407         unsigned long : 3;
27408         unsigned long TIM : 1;
27409         unsigned long : 27;
27410 #else
27411         unsigned long : 27;
27412         unsigned long TIM : 1;
27413         unsigned long : 3;
27414         unsigned long TIS : 1;
27415 #endif
27416     } BIT;
27417     } TRIMD;
27418     char          wk13[72];
27419     void          *RBWAR;
27420     void          *RDFAR;
27421     char          wk14[4];
27422     void          *TBRAR;
27423     void          *TDFAR;
27424 } st_ptpedmac_t;
27425
27426 typedef struct st_qspi {
27427     union {
27428         unsigned char BYTE;
27429         struct {
27430
27431 #ifdef __RX_LITTLE_ENDIAN__
27432         unsigned char : 1;
27433         unsigned char SPSSLIE : 1;
27434         unsigned char : 1;
27435         unsigned char MSTR : 1;
27436         unsigned char : 1;
27437         unsigned char SPTIE : 1;
27438         unsigned char SPE : 1;
27439         unsigned char SPRIE : 1;
27440 #else
27441         unsigned char SPRIE : 1;
27442         unsigned char SPE : 1;
27443         unsigned char SPTIE : 1;
27444         unsigned char : 1;
27445         unsigned char MSTR : 1;
27446         unsigned char : 1;
27447         unsigned char SPSSLIE : 1;
27448         unsigned char : 1;
27449 #endif
27450     } BIT;
27451     } SPCR;
27452     union {
27453         unsigned char BYTE;
27454         struct {
27455
27456 #ifdef __RX_LITTLE_ENDIAN__
27457         unsigned char SSLP : 1;
27458         unsigned char : 7;
27459 #else
27460         unsigned char : 7;
27461         unsigned char SSLP : 1;
27462 #endif
27463     } BIT;
27464     } SSLP;
27465     union {
27466         unsigned char BYTE;

```

```

27467     struct {
27468
27469 #ifdef __RX_LITTLE_ENDIAN__
27470     unsigned char SPLP : 1;
27471     unsigned char IO2FV : 1;
27472     unsigned char IO3FV : 1;
27473     unsigned char : 1;
27474     unsigned char MOIFV : 1;
27475     unsigned char MOIFE : 1;
27476     unsigned char : 2;
27477 #else
27478     unsigned char : 2;
27479     unsigned char MOIFE : 1;
27480     unsigned char MOIFV : 1;
27481     unsigned char : 1;
27482     unsigned char IO3FV : 1;
27483     unsigned char IO2FV : 1;
27484     unsigned char SPLP : 1;
27485 #endif
27486     } BIT;
27487     } SPPCR;
27488     union {
27489         unsigned char BYTE;
27490         struct {
27491
27492 #ifdef __RX_LITTLE_ENDIAN__
27493         unsigned char : 4;
27494         unsigned char SPSSLF : 1;
27495         unsigned char SPTEF : 1;
27496         unsigned char TREND : 1;
27497         unsigned char SPRFF : 1;
27498 #else
27499         unsigned char SPRFF : 1;
27500         unsigned char TREND : 1;
27501         unsigned char SPTEF : 1;
27502         unsigned char SPSSLF : 1;
27503         unsigned char : 4;
27504 #endif
27505         } BIT;
27506         } SPSR;
27507         union {
27508             unsigned long LONG;
27509             struct {
27510                 unsigned short H;
27511             } WORD;
27512             struct {
27513                 unsigned char HH;
27514             } BYTE;
27515         } SPDR;
27516         union {
27517             unsigned char BYTE;
27518             struct {
27519
27520 #ifdef __RX_LITTLE_ENDIAN__
27521             unsigned char SPSC : 2;
27522             unsigned char : 6;
27523 #else
27524             unsigned char : 6;
27525             unsigned char SPSC : 2;
27526 #endif
27527             } BIT;
27528             } SPSCR;
27529             union {
27530                 unsigned char BYTE;
27531                 struct {
27532
27533 #ifdef __RX_LITTLE_ENDIAN__
27534                 unsigned char SPSS : 2;
27535                 unsigned char : 6;
27536 #else
27537                 unsigned char : 6;
27538                 unsigned char SPSS : 2;
27539 #endif
27540                 } BIT;
27541                 } SPSSR;
27542                 union {
27543                     unsigned char BYTE;
27544                     struct {
27545
27546 #ifdef __RX_LITTLE_ENDIAN__
27547                     unsigned char SPBR0 : 1;
27548                     unsigned char SPBR1 : 1;
27549                     unsigned char SPBR2 : 1;
27550                     unsigned char SPBR3 : 1;
27551                     unsigned char SPBR4 : 1;
27552                     unsigned char SPBR5 : 1;
27553                     unsigned char SPBR6 : 1;

```

```

27554         unsigned char SPBR7 : 1;
27555 #else
27556         unsigned char SPBR7 : 1;
27557         unsigned char SPBR6 : 1;
27558         unsigned char SPBR5 : 1;
27559         unsigned char SPBR4 : 1;
27560         unsigned char SPBR3 : 1;
27561         unsigned char SPBR2 : 1;
27562         unsigned char SPBR1 : 1;
27563         unsigned char SPBR0 : 1;
27564 #endif
27565     } BIT;
27566     } SPBR;
27567     union {
27568         unsigned char BYTE;
27569         struct {
27570
27571 #ifdef __RX_LITTLE_ENDIAN__
27572         unsigned char : 7;
27573         unsigned char TXDMY : 1;
27574 #else
27575         unsigned char TXDMY : 1;
27576         unsigned char : 7;
27577 #endif
27578     } BIT;
27579     } SPDCR;
27580     union {
27581         unsigned char BYTE;
27582         struct {
27583
27584 #ifdef __RX_LITTLE_ENDIAN__
27585         unsigned char SCKDL : 3;
27586         unsigned char : 5;
27587 #else
27588         unsigned char : 5;
27589         unsigned char SCKDL : 3;
27590 #endif
27591     } BIT;
27592     } SPCKD;
27593     union {
27594         unsigned char BYTE;
27595         struct {
27596
27597 #ifdef __RX_LITTLE_ENDIAN__
27598         unsigned char SLNDL : 3;
27599         unsigned char : 5;
27600 #else
27601         unsigned char : 5;
27602         unsigned char SLNDL : 3;
27603 #endif
27604     } BIT;
27605     } SSLND;
27606     union {
27607         unsigned char BYTE;
27608         struct {
27609
27610 #ifdef __RX_LITTLE_ENDIAN__
27611         unsigned char SPNDL : 3;
27612         unsigned char : 5;
27613 #else
27614         unsigned char : 5;
27615         unsigned char SPNDL : 3;
27616 #endif
27617     } BIT;
27618     } SPND;
27619     char          wk0[1];
27620     union {
27621         unsigned short WORD;
27622         struct {
27623
27624 #ifdef __RX_LITTLE_ENDIAN__
27625         unsigned short CPHA : 1;
27626         unsigned short CPOL : 1;
27627         unsigned short BRDV : 2;
27628         unsigned short SPRW : 1;
27629         unsigned short SPIMOD : 2;
27630         unsigned short SSLKP : 1;
27631         unsigned short SPB : 4;
27632         unsigned short LSBF : 1;
27633         unsigned short SPNDEN : 1;
27634         unsigned short SLNDEN : 1;
27635         unsigned short SCKDEN : 1;
27636 #else
27637         unsigned short SCKDEN : 1;
27638         unsigned short SLNDEN : 1;
27639         unsigned short SPNDEN : 1;
27640         unsigned short LSBF : 1;

```

```

27641         unsigned short SPB : 4;
27642         unsigned short SSLKP : 1;
27643         unsigned short SPIMOD : 2;
27644         unsigned short SPRW : 1;
27645         unsigned short BRDV : 2;
27646         unsigned short CPOL : 1;
27647         unsigned short CPHA : 1;
27648     #endif
27649     } BIT;
27650     } SPCMD0;
27651     union {
27652         unsigned short WORD;
27653     struct {
27654
27655     #ifdef __RX_LITTLE_ENDIAN__
27656         unsigned short CPHA : 1;
27657         unsigned short CPOL : 1;
27658         unsigned short BRDV : 2;
27659         unsigned short SPRW : 1;
27660         unsigned short SPIMOD : 2;
27661         unsigned short SSLKP : 1;
27662         unsigned short SPB : 4;
27663         unsigned short LSBF : 1;
27664         unsigned short SPNDEN : 1;
27665         unsigned short SLNDEN : 1;
27666         unsigned short SCKDEN : 1;
27667     #else
27668         unsigned short SCKDEN : 1;
27669         unsigned short SLNDEN : 1;
27670         unsigned short SPNDEN : 1;
27671         unsigned short LSBF : 1;
27672         unsigned short SPB : 4;
27673         unsigned short SSLKP : 1;
27674         unsigned short SPIMOD : 2;
27675         unsigned short SPRW : 1;
27676         unsigned short BRDV : 2;
27677         unsigned short CPOL : 1;
27678         unsigned short CPHA : 1;
27679     #endif
27680     } BIT;
27681     } SPCMD1;
27682     union {
27683         unsigned short WORD;
27684     struct {
27685
27686     #ifdef __RX_LITTLE_ENDIAN__
27687         unsigned short CPHA : 1;
27688         unsigned short CPOL : 1;
27689         unsigned short BRDV : 2;
27690         unsigned short SPRW : 1;
27691         unsigned short SPIMOD : 2;
27692         unsigned short SSLKP : 1;
27693         unsigned short SPB : 4;
27694         unsigned short LSBF : 1;
27695         unsigned short SPNDEN : 1;
27696         unsigned short SLNDEN : 1;
27697         unsigned short SCKDEN : 1;
27698     #else
27699         unsigned short SCKDEN : 1;
27700         unsigned short SLNDEN : 1;
27701         unsigned short SPNDEN : 1;
27702         unsigned short LSBF : 1;
27703         unsigned short SPB : 4;
27704         unsigned short SSLKP : 1;
27705         unsigned short SPIMOD : 2;
27706         unsigned short SPRW : 1;
27707         unsigned short BRDV : 2;
27708         unsigned short CPOL : 1;
27709         unsigned short CPHA : 1;
27710     #endif
27711     } BIT;
27712     } SPCMD2;
27713     union {
27714         unsigned short WORD;
27715     struct {
27716
27717     #ifdef __RX_LITTLE_ENDIAN__
27718         unsigned short CPHA : 1;
27719         unsigned short CPOL : 1;
27720         unsigned short BRDV : 2;
27721         unsigned short SPRW : 1;
27722         unsigned short SPIMOD : 2;
27723         unsigned short SSLKP : 1;
27724         unsigned short SPB : 4;
27725         unsigned short LSBF : 1;
27726         unsigned short SPNDEN : 1;
27727         unsigned short SLNDEN : 1;

```

```

27728         unsigned short SCKDEN : 1;
27729 #else
27730         unsigned short SCKDEN : 1;
27731         unsigned short SLNDEN : 1;
27732         unsigned short SPNDEN : 1;
27733         unsigned short LSBF : 1;
27734         unsigned short SPB : 4;
27735         unsigned short SSLKP : 1;
27736         unsigned short SPIMOD : 2;
27737         unsigned short SPRW : 1;
27738         unsigned short BRDV : 2;
27739         unsigned short CPOL : 1;
27740         unsigned short CPHA : 1;
27741 #endif
27742     } BIT;
27743     } SPCMD3;
27744     union {
27745         unsigned char BYTE;
27746         struct {
27747
27748 #ifdef __RX_LITTLE_ENDIAN__
27749         unsigned char RXTRG : 3;
27750         unsigned char TXTRGEX : 1;
27751         unsigned char TXTRG : 2;
27752         unsigned char RXRST : 1;
27753         unsigned char TXRST : 1;
27754 #else
27755         unsigned char TXRST : 1;
27756         unsigned char RXRST : 1;
27757         unsigned char TXTRG : 2;
27758         unsigned char TXTRGEX : 1;
27759         unsigned char RXTRG : 3;
27760 #endif
27761     } BIT;
27762     } SPBFCR;
27763     char        wk1[1];
27764     union {
27765         unsigned short WORD;
27766         struct {
27767
27768 #ifdef __RX_LITTLE_ENDIAN__
27769         unsigned short RXBC : 6;
27770         unsigned short : 2;
27771         unsigned short TXBC : 6;
27772         unsigned short : 2;
27773 #else
27774         unsigned short : 2;
27775         unsigned short TXBC : 6;
27776         unsigned short : 2;
27777         unsigned short RXBC : 6;
27778 #endif
27779     } BIT;
27780     } SPBDCR;
27781     unsigned long SPBMUL0;
27782     unsigned long SPBMUL1;
27783     unsigned long SPBMUL2;
27784     unsigned long SPBMUL3;
27785 } st_qspi_t;
27786
27787 typedef struct st_ram {
27788     union {
27789         unsigned char BYTE;
27790         struct {
27791
27792 #ifdef __RX_LITTLE_ENDIAN__
27793         unsigned char RAMMODE : 2;
27794         unsigned char : 6;
27795 #else
27796         unsigned char : 6;
27797         unsigned char RAMMODE : 2;
27798 #endif
27799     } BIT;
27800     } RAMMODE;
27801     union {
27802         unsigned char BYTE;
27803         struct {
27804
27805 #ifdef __RX_LITTLE_ENDIAN__
27806         unsigned char RAMERR : 1;
27807         unsigned char : 7;
27808 #else
27809         unsigned char : 7;
27810         unsigned char RAMERR : 1;
27811 #endif
27812     } BIT;
27813     } RAMSTS;
27814     char        wk0[2];

```

```

27815     union {
27816         unsigned char BYTE;
27817         struct {
27818
27819 #ifdef __RX_LITTLE_ENDIAN__
27820         unsigned char RAMPRCR : 1;
27821         unsigned char KW : 7;
27822 #else
27823         unsigned char KW : 7;
27824         unsigned char RAMPRCR : 1;
27825 #endif
27826     } BIT;
27827     } RAMPRCR;
27828     char        wk1[3];
27829     union {
27830         unsigned long LONG;
27831         struct {
27832
27833 #ifdef __RX_LITTLE_ENDIAN__
27834         unsigned long : 3;
27835         unsigned long READ : 16;
27836         unsigned long : 13;
27837 #else
27838         unsigned long : 13;
27839         unsigned long READ : 16;
27840         unsigned long : 3;
27841 #endif
27842     } BIT;
27843     } RAMECAD;
27844     char        wk2[52];
27845     union {
27846         unsigned char BYTE;
27847         struct {
27848
27849 #ifdef __RX_LITTLE_ENDIAN__
27850         unsigned char EXRAMMODE : 2;
27851         unsigned char : 6;
27852 #else
27853         unsigned char : 6;
27854         unsigned char EXRAMMODE : 2;
27855 #endif
27856     } BIT;
27857     } EXRAMMODE;
27858     union {
27859         unsigned char BYTE;
27860         struct {
27861
27862 #ifdef __RX_LITTLE_ENDIAN__
27863         unsigned char EXRAMERR : 1;
27864         unsigned char : 7;
27865 #else
27866         unsigned char : 7;
27867         unsigned char EXRAMERR : 1;
27868 #endif
27869     } BIT;
27870     } EXRAMSTS;
27871     char        wk3[2];
27872     union {
27873         unsigned char BYTE;
27874         struct {
27875
27876 #ifdef __RX_LITTLE_ENDIAN__
27877         unsigned char EXRAMPRCR : 1;
27878         unsigned char KW : 7;
27879 #else
27880         unsigned char KW : 7;
27881         unsigned char EXRAMPRCR : 1;
27882 #endif
27883     } BIT;
27884     } EXRAMPRCR;
27885     char        wk4[3];
27886     union {
27887         unsigned long LONG;
27888         struct {
27889
27890 #ifdef __RX_LITTLE_ENDIAN__
27891         unsigned long : 3;
27892         unsigned long READ : 16;
27893         unsigned long : 13;
27894 #else
27895         unsigned long : 13;
27896         unsigned long READ : 16;
27897         unsigned long : 3;
27898 #endif
27899     } BIT;
27900     } EXRAMECAD;
27901 } st_ram_t;

```

```

27902
27903 typedef struct st_riic {
27904     union {
27905         unsigned char BYTE;
27906     } struct {
27907
27908 #ifdef __RX_LITTLE_ENDIAN__
27909     unsigned char SDAI : 1;
27910     unsigned char SCLI : 1;
27911     unsigned char SDAO : 1;
27912     unsigned char SCLO : 1;
27913     unsigned char SOWP : 1;
27914     unsigned char CLO : 1;
27915     unsigned char IICRST : 1;
27916     unsigned char ICE : 1;
27917 #else
27918     unsigned char ICE : 1;
27919     unsigned char IICRST : 1;
27920     unsigned char CLO : 1;
27921     unsigned char SOWP : 1;
27922     unsigned char SCLO : 1;
27923     unsigned char SDAO : 1;
27924     unsigned char SCLI : 1;
27925     unsigned char SDAI : 1;
27926 #endif
27927     } BIT;
27928     } ICCR1;
27929     union {
27930         unsigned char BYTE;
27931     } struct {
27932
27933 #ifdef __RX_LITTLE_ENDIAN__
27934     unsigned char : 1;
27935     unsigned char ST : 1;
27936     unsigned char RS : 1;
27937     unsigned char SP : 1;
27938     unsigned char : 1;
27939     unsigned char TRS : 1;
27940     unsigned char MST : 1;
27941     unsigned char BBSY : 1;
27942 #else
27943     unsigned char BBSY : 1;
27944     unsigned char MST : 1;
27945     unsigned char TRS : 1;
27946     unsigned char : 1;
27947     unsigned char SP : 1;
27948     unsigned char RS : 1;
27949     unsigned char ST : 1;
27950     unsigned char : 1;
27951 #endif
27952     } BIT;
27953     } ICCR2;
27954     union {
27955         unsigned char BYTE;
27956     } struct {
27957
27958 #ifdef __RX_LITTLE_ENDIAN__
27959     unsigned char BC : 3;
27960     unsigned char BCWP : 1;
27961     unsigned char CKS : 3;
27962     unsigned char MTWP : 1;
27963 #else
27964     unsigned char MTWP : 1;
27965     unsigned char CKS : 3;
27966     unsigned char BCWP : 1;
27967     unsigned char BC : 3;
27968 #endif
27969     } BIT;
27970     } ICMR1;
27971     union {
27972         unsigned char BYTE;
27973     } struct {
27974
27975 #ifdef __RX_LITTLE_ENDIAN__
27976     unsigned char TMOS : 1;
27977     unsigned char TMOL : 1;
27978     unsigned char TMOH : 1;
27979     unsigned char : 1;
27980     unsigned char SDDL : 3;
27981     unsigned char DLCS : 1;
27982 #else
27983     unsigned char DLCS : 1;
27984     unsigned char SDDL : 3;
27985     unsigned char : 1;
27986     unsigned char TMOH : 1;
27987     unsigned char TMOL : 1;
27988     unsigned char TMOS : 1;

```

```

27989 #endif
27990     } BIT;
27991     } ICMR2;
27992     union {
27993         unsigned char BYTE;
27994         struct {
27995
27996 #ifdef __RX_LITTLE_ENDIAN__
27997         unsigned char NF : 2;
27998         unsigned char ACKBR : 1;
27999         unsigned char ACKBT : 1;
28000         unsigned char ACKWP : 1;
28001         unsigned char RDRFS : 1;
28002         unsigned char WAIT : 1;
28003         unsigned char SMBS : 1;
28004 #else
28005         unsigned char SMBS : 1;
28006         unsigned char WAIT : 1;
28007         unsigned char RDRFS : 1;
28008         unsigned char ACKWP : 1;
28009         unsigned char ACKBT : 1;
28010         unsigned char ACKBR : 1;
28011         unsigned char NF : 2;
28012 #endif
28013     } BIT;
28014     } ICMR3;
28015     union {
28016         unsigned char BYTE;
28017         struct {
28018
28019 #ifdef __RX_LITTLE_ENDIAN__
28020         unsigned char TMOE : 1;
28021         unsigned char MALE : 1;
28022         unsigned char NALE : 1;
28023         unsigned char SALE : 1;
28024         unsigned char NACKKE : 1;
28025         unsigned char NFE : 1;
28026         unsigned char SCLE : 1;
28027         unsigned char FMPE : 1;
28028 #else
28029         unsigned char FMPE : 1;
28030         unsigned char SCLE : 1;
28031         unsigned char NFE : 1;
28032         unsigned char NACKKE : 1;
28033         unsigned char SALE : 1;
28034         unsigned char NALE : 1;
28035         unsigned char MALE : 1;
28036         unsigned char TMOE : 1;
28037 #endif
28038     } BIT;
28039     } ICFER;
28040     union {
28041         unsigned char BYTE;
28042         struct {
28043
28044 #ifdef __RX_LITTLE_ENDIAN__
28045         unsigned char SAR0E : 1;
28046         unsigned char SAR1E : 1;
28047         unsigned char SAR2E : 1;
28048         unsigned char GCAE : 1;
28049         unsigned char : 1;
28050         unsigned char DIDE : 1;
28051         unsigned char : 1;
28052         unsigned char HOAE : 1;
28053 #else
28054         unsigned char HOAE : 1;
28055         unsigned char : 1;
28056         unsigned char DIDE : 1;
28057         unsigned char : 1;
28058         unsigned char GCAE : 1;
28059         unsigned char SAR2E : 1;
28060         unsigned char SAR1E : 1;
28061         unsigned char SAR0E : 1;
28062 #endif
28063     } BIT;
28064     } ICSE;
28065     union {
28066         unsigned char BYTE;
28067         struct {
28068
28069 #ifdef __RX_LITTLE_ENDIAN__
28070         unsigned char TMOIE : 1;
28071         unsigned char ALIE : 1;
28072         unsigned char STIE : 1;
28073         unsigned char SPIE : 1;
28074         unsigned char NAKIE : 1;
28075         unsigned char RIE : 1;

```

```
28076         unsigned char TEIE : 1;
28077         unsigned char TIE : 1;
28078 #else
28079         unsigned char TIE : 1;
28080         unsigned char TEIE : 1;
28081         unsigned char RIE : 1;
28082         unsigned char NAKIE : 1;
28083         unsigned char SPIE : 1;
28084         unsigned char STIE : 1;
28085         unsigned char ALIE : 1;
28086         unsigned char TMOIE : 1;
28087 #endif
28088     } BIT;
28089     } ICIER;
28090     union {
28091         unsigned char BYTE;
28092     struct {
28093
28094 #ifdef __RX_LITTLE_ENDIAN__
28095         unsigned char AAS0 : 1;
28096         unsigned char AAS1 : 1;
28097         unsigned char AAS2 : 1;
28098         unsigned char GCA : 1;
28099         unsigned char : 1;
28100         unsigned char DID : 1;
28101         unsigned char : 1;
28102         unsigned char HOA : 1;
28103 #else
28104         unsigned char HOA : 1;
28105         unsigned char : 1;
28106         unsigned char DID : 1;
28107         unsigned char : 1;
28108         unsigned char GCA : 1;
28109         unsigned char AAS2 : 1;
28110         unsigned char AAS1 : 1;
28111         unsigned char AAS0 : 1;
28112 #endif
28113     } BIT;
28114     } ICSR1;
28115     union {
28116         unsigned char BYTE;
28117     struct {
28118
28119 #ifdef __RX_LITTLE_ENDIAN__
28120         unsigned char TMOF : 1;
28121         unsigned char AL : 1;
28122         unsigned char START : 1;
28123         unsigned char STOP : 1;
28124         unsigned char NACKF : 1;
28125         unsigned char RDRF : 1;
28126         unsigned char TEND : 1;
28127         unsigned char TDRE : 1;
28128 #else
28129         unsigned char TDRE : 1;
28130         unsigned char TEND : 1;
28131         unsigned char RDRF : 1;
28132         unsigned char NACKF : 1;
28133         unsigned char STOP : 1;
28134         unsigned char START : 1;
28135         unsigned char AL : 1;
28136         unsigned char TMOF : 1;
28137 #endif
28138     } BIT;
28139     } ICSR2;
28140     union {
28141         unsigned char BYTE;
28142     struct {
28143
28144 #ifdef __RX_LITTLE_ENDIAN__
28145         unsigned char SVA0 : 1;
28146         unsigned char SVA : 7;
28147 #else
28148         unsigned char SVA : 7;
28149         unsigned char SVA0 : 1;
28150 #endif
28151     } BIT;
28152     } SARL0;
28153     union {
28154         unsigned char BYTE;
28155     struct {
28156
28157 #ifdef __RX_LITTLE_ENDIAN__
28158         unsigned char FS : 1;
28159         unsigned char SVA : 2;
28160         unsigned char : 5;
28161 #else
28162         unsigned char : 5;
```

```
28163         unsigned char SVA : 2;
28164         unsigned char FS : 1;
28165     #endif
28166     } BIT;
28167     } SARU0;
28168     union {
28169         unsigned char BYTE;
28170         struct {
28171
28172     #ifdef __RX_LITTLE_ENDIAN__
28173         unsigned char SVA0 : 1;
28174         unsigned char SVA : 7;
28175     #else
28176         unsigned char SVA : 7;
28177         unsigned char SVA0 : 1;
28178     #endif
28179     } BIT;
28180     } SARL1;
28181     union {
28182         unsigned char BYTE;
28183         struct {
28184
28185     #ifdef __RX_LITTLE_ENDIAN__
28186         unsigned char FS : 1;
28187         unsigned char SVA : 2;
28188         unsigned char : 5;
28189     #else
28190         unsigned char : 5;
28191         unsigned char SVA : 2;
28192         unsigned char FS : 1;
28193     #endif
28194     } BIT;
28195     } SARU1;
28196     union {
28197         unsigned char BYTE;
28198         struct {
28199
28200     #ifdef __RX_LITTLE_ENDIAN__
28201         unsigned char SVA0 : 1;
28202         unsigned char SVA : 7;
28203     #else
28204         unsigned char SVA : 7;
28205         unsigned char SVA0 : 1;
28206     #endif
28207     } BIT;
28208     } SARL2;
28209     union {
28210         unsigned char BYTE;
28211         struct {
28212
28213     #ifdef __RX_LITTLE_ENDIAN__
28214         unsigned char FS : 1;
28215         unsigned char SVA : 2;
28216         unsigned char : 5;
28217     #else
28218         unsigned char : 5;
28219         unsigned char SVA : 2;
28220         unsigned char FS : 1;
28221     #endif
28222     } BIT;
28223     } SARU2;
28224     union {
28225         unsigned char BYTE;
28226         struct {
28227
28228     #ifdef __RX_LITTLE_ENDIAN__
28229         unsigned char BRL : 5;
28230         unsigned char : 3;
28231     #else
28232         unsigned char : 3;
28233         unsigned char BRL : 5;
28234     #endif
28235     } BIT;
28236     } ICBRL;
28237     union {
28238         unsigned char BYTE;
28239         struct {
28240
28241     #ifdef __RX_LITTLE_ENDIAN__
28242         unsigned char BRH : 5;
28243         unsigned char : 3;
28244     #else
28245         unsigned char : 3;
28246         unsigned char BRH : 5;
28247     #endif
28248     } BIT;
28249     } ICBRH;
```

```

28250     unsigned char   ICDRT;
28251     unsigned char   ICDRR;
28252 } st_riic_t;
28253
28254 typedef struct st_rspi {
28255     union {
28256         unsigned char BYTE;
28257         struct {
28258
28259 #ifdef __RX_LITTLE_ENDIAN__
28260         unsigned char SPMS : 1;
28261         unsigned char TXMD : 1;
28262         unsigned char MODFEN : 1;
28263         unsigned char MSTR : 1;
28264         unsigned char SPEIE : 1;
28265         unsigned char SPTIE : 1;
28266         unsigned char SPE : 1;
28267         unsigned char SPRIE : 1;
28268 #else
28269         unsigned char SPRIE : 1;
28270         unsigned char SPE : 1;
28271         unsigned char SPTIE : 1;
28272         unsigned char SPEIE : 1;
28273         unsigned char MSTR : 1;
28274         unsigned char MODFEN : 1;
28275         unsigned char TXMD : 1;
28276         unsigned char SPMS : 1;
28277 #endif
28278     } BIT;
28279     } SPCR;
28280     union {
28281         unsigned char BYTE;
28282         struct {
28283
28284 #ifdef __RX_LITTLE_ENDIAN__
28285         unsigned char SSL0P : 1;
28286         unsigned char SSL1P : 1;
28287         unsigned char SSL2P : 1;
28288         unsigned char SSL3P : 1;
28289         unsigned char : 4;
28290 #else
28291         unsigned char : 4;
28292         unsigned char SSL3P : 1;
28293         unsigned char SSL2P : 1;
28294         unsigned char SSL1P : 1;
28295         unsigned char SSL0P : 1;
28296 #endif
28297     } BIT;
28298     } SSLP;
28299     union {
28300         unsigned char BYTE;
28301         struct {
28302
28303 #ifdef __RX_LITTLE_ENDIAN__
28304         unsigned char SPLP : 1;
28305         unsigned char SPLP2 : 1;
28306         unsigned char : 2;
28307         unsigned char MOIFV : 1;
28308         unsigned char MOIFE : 1;
28309         unsigned char : 2;
28310 #else
28311         unsigned char : 2;
28312         unsigned char MOIFE : 1;
28313         unsigned char MOIFV : 1;
28314         unsigned char : 2;
28315         unsigned char SPLP2 : 1;
28316         unsigned char SPLP : 1;
28317 #endif
28318     } BIT;
28319     } SPPCR;
28320     union {
28321         unsigned char BYTE;
28322         struct {
28323
28324 #ifdef __RX_LITTLE_ENDIAN__
28325         unsigned char OVRF : 1;
28326         unsigned char IDLNF : 1;
28327         unsigned char MODF : 1;
28328         unsigned char PERF : 1;
28329         unsigned char UDRF : 1;
28330         unsigned char SPTEF : 1;
28331         unsigned char : 1;
28332         unsigned char SPRF : 1;
28333 #else
28334         unsigned char SPRF : 1;
28335         unsigned char : 1;
28336         unsigned char SPTEF : 1;

```

```

28337         unsigned char UDRF : 1;
28338         unsigned char PERF : 1;
28339         unsigned char MODF : 1;
28340         unsigned char IDLNF : 1;
28341         unsigned char OVRF : 1;
28342     #endif
28343     } BIT;
28344     } SPDR;
28345     union {
28346         unsigned long LONG;
28347         struct {
28348             unsigned short H;
28349         } WORD;
28350         struct {
28351             unsigned char HH;
28352         } BYTE;
28353     } SPDR;
28354     union {
28355         unsigned char BYTE;
28356         struct {
28357
28358     #ifdef __RX_LITTLE_ENDIAN__
28359         unsigned char SPSLN : 3;
28360         unsigned char : 5;
28361     #else
28362         unsigned char : 5;
28363         unsigned char SPSLN : 3;
28364     #endif
28365     } BIT;
28366     } SPSCR;
28367     union {
28368         unsigned char BYTE;
28369         struct {
28370
28371     #ifdef __RX_LITTLE_ENDIAN__
28372         unsigned char SPCP : 3;
28373         unsigned char : 1;
28374         unsigned char SPECM : 3;
28375         unsigned char : 1;
28376     #else
28377         unsigned char : 1;
28378         unsigned char SPECM : 3;
28379         unsigned char : 1;
28380         unsigned char SPCP : 3;
28381     #endif
28382     } BIT;
28383     } SPSSR;
28384     unsigned char SPBR;
28385     union {
28386         unsigned char BYTE;
28387         struct {
28388
28389     #ifdef __RX_LITTLE_ENDIAN__
28390         unsigned char SPFC : 2;
28391         unsigned char : 2;
28392         unsigned char SPRDTD : 1;
28393         unsigned char SPLW : 1;
28394         unsigned char SPBYT : 1;
28395         unsigned char : 1;
28396     #else
28397         unsigned char : 1;
28398         unsigned char SPBYT : 1;
28399         unsigned char SPLW : 1;
28400         unsigned char SPRDTD : 1;
28401         unsigned char : 2;
28402         unsigned char SPFC : 2;
28403     #endif
28404     } BIT;
28405     } SPDCR;
28406     union {
28407         unsigned char BYTE;
28408         struct {
28409
28410     #ifdef __RX_LITTLE_ENDIAN__
28411         unsigned char SCKDL : 3;
28412         unsigned char : 5;
28413     #else
28414         unsigned char : 5;
28415         unsigned char SCKDL : 3;
28416     #endif
28417     } BIT;
28418     } SPCKD;
28419     union {
28420         unsigned char BYTE;
28421         struct {
28422
28423     #ifdef __RX_LITTLE_ENDIAN__

```

```

28424         unsigned char SLNDL : 3;
28425         unsigned char : 5;
28426 #else
28427         unsigned char : 5;
28428         unsigned char SLNDL : 3;
28429 #endif
28430     } BIT;
28431     } SSLND;
28432     union {
28433         unsigned char BYTE;
28434     struct {
28435
28436 #ifdef __RX_LITTLE_ENDIAN__
28437         unsigned char SPNDL : 3;
28438         unsigned char : 5;
28439 #else
28440         unsigned char : 5;
28441         unsigned char SPNDL : 3;
28442 #endif
28443     } BIT;
28444     } SPND;
28445     union {
28446         unsigned char BYTE;
28447     struct {
28448
28449 #ifdef __RX_LITTLE_ENDIAN__
28450         unsigned char SPPE : 1;
28451         unsigned char SPOE : 1;
28452         unsigned char SPIE : 1;
28453         unsigned char PTE : 1;
28454         unsigned char SCKASE : 1;
28455         unsigned char : 3;
28456 #else
28457         unsigned char : 3;
28458         unsigned char SCKASE : 1;
28459         unsigned char PTE : 1;
28460         unsigned char SPIE : 1;
28461         unsigned char SPOE : 1;
28462         unsigned char SPPE : 1;
28463 #endif
28464     } BIT;
28465     } SPCR2;
28466     union {
28467         unsigned short WORD;
28468     struct {
28469
28470 #ifdef __RX_LITTLE_ENDIAN__
28471         unsigned short CPHA : 1;
28472         unsigned short CPOL : 1;
28473         unsigned short BRDV : 2;
28474         unsigned short SSLA : 3;
28475         unsigned short SSLKP : 1;
28476         unsigned short SPB : 4;
28477         unsigned short LSBF : 1;
28478         unsigned short SPNDEN : 1;
28479         unsigned short SLNDEN : 1;
28480         unsigned short SCKDEN : 1;
28481 #else
28482         unsigned short SCKDEN : 1;
28483         unsigned short SLNDEN : 1;
28484         unsigned short SPNDEN : 1;
28485         unsigned short LSBF : 1;
28486         unsigned short SPB : 4;
28487         unsigned short SSLKP : 1;
28488         unsigned short SSLA : 3;
28489         unsigned short BRDV : 2;
28490         unsigned short CPOL : 1;
28491         unsigned short CPHA : 1;
28492 #endif
28493     } BIT;
28494     } SPCMD0;
28495     union {
28496         unsigned short WORD;
28497     struct {
28498
28499 #ifdef __RX_LITTLE_ENDIAN__
28500         unsigned short CPHA : 1;
28501         unsigned short CPOL : 1;
28502         unsigned short BRDV : 2;
28503         unsigned short SSLA : 3;
28504         unsigned short SSLKP : 1;
28505         unsigned short SPB : 4;
28506         unsigned short LSBF : 1;
28507         unsigned short SPNDEN : 1;
28508         unsigned short SLNDEN : 1;
28509         unsigned short SCKDEN : 1;
28510 #else

```

```

28511         unsigned short SCKDEN : 1;
28512         unsigned short SLNDEN : 1;
28513         unsigned short SPNDEN : 1;
28514         unsigned short LSBF : 1;
28515         unsigned short SPB : 4;
28516         unsigned short SSLKP : 1;
28517         unsigned short SSLA : 3;
28518         unsigned short BRDV : 2;
28519         unsigned short CPOL : 1;
28520         unsigned short CPHA : 1;
28521     #endif
28522     } BIT;
28523     } SPCMD1;
28524     union {
28525         unsigned short WORD;
28526         struct {
28527
28528     #ifdef __RX_LITTLE_ENDIAN__
28529         unsigned short CPHA : 1;
28530         unsigned short CPOL : 1;
28531         unsigned short BRDV : 2;
28532         unsigned short SSLA : 3;
28533         unsigned short SSLKP : 1;
28534         unsigned short SPB : 4;
28535         unsigned short LSBF : 1;
28536         unsigned short SPNDEN : 1;
28537         unsigned short SLNDEN : 1;
28538         unsigned short SCKDEN : 1;
28539     #else
28540         unsigned short SCKDEN : 1;
28541         unsigned short SLNDEN : 1;
28542         unsigned short SPNDEN : 1;
28543         unsigned short LSBF : 1;
28544         unsigned short SPB : 4;
28545         unsigned short SSLKP : 1;
28546         unsigned short SSLA : 3;
28547         unsigned short BRDV : 2;
28548         unsigned short CPOL : 1;
28549         unsigned short CPHA : 1;
28550     #endif
28551     } BIT;
28552     } SPCMD2;
28553     union {
28554         unsigned short WORD;
28555         struct {
28556
28557     #ifdef __RX_LITTLE_ENDIAN__
28558         unsigned short CPHA : 1;
28559         unsigned short CPOL : 1;
28560         unsigned short BRDV : 2;
28561         unsigned short SSLA : 3;
28562         unsigned short SSLKP : 1;
28563         unsigned short SPB : 4;
28564         unsigned short LSBF : 1;
28565         unsigned short SPNDEN : 1;
28566         unsigned short SLNDEN : 1;
28567         unsigned short SCKDEN : 1;
28568     #else
28569         unsigned short SCKDEN : 1;
28570         unsigned short SLNDEN : 1;
28571         unsigned short SPNDEN : 1;
28572         unsigned short LSBF : 1;
28573         unsigned short SPB : 4;
28574         unsigned short SSLKP : 1;
28575         unsigned short SSLA : 3;
28576         unsigned short BRDV : 2;
28577         unsigned short CPOL : 1;
28578         unsigned short CPHA : 1;
28579     #endif
28580     } BIT;
28581     } SPCMD3;
28582     union {
28583         unsigned short WORD;
28584         struct {
28585
28586     #ifdef __RX_LITTLE_ENDIAN__
28587         unsigned short CPHA : 1;
28588         unsigned short CPOL : 1;
28589         unsigned short BRDV : 2;
28590         unsigned short SSLA : 3;
28591         unsigned short SSLKP : 1;
28592         unsigned short SPB : 4;
28593         unsigned short LSBF : 1;
28594         unsigned short SPNDEN : 1;
28595         unsigned short SLNDEN : 1;
28596         unsigned short SCKDEN : 1;
28597     #else

```

```
28598     unsigned short SCKDEN : 1;
28599     unsigned short SLNDEN : 1;
28600     unsigned short SPNDEN : 1;
28601     unsigned short LSBF : 1;
28602     unsigned short SPB : 4;
28603     unsigned short SSLKP : 1;
28604     unsigned short SSLA : 3;
28605     unsigned short BRDV : 2;
28606     unsigned short CPOL : 1;
28607     unsigned short CPHA : 1;
28608 #endif
28609     } BIT;
28610     } SPCMD4;
28611     union {
28612         unsigned short WORD;
28613         struct {
28614
28615 #ifdef __RX_LITTLE_ENDIAN__
28616         unsigned short CPHA : 1;
28617         unsigned short CPOL : 1;
28618         unsigned short BRDV : 2;
28619         unsigned short SSLA : 3;
28620         unsigned short SSLKP : 1;
28621         unsigned short SPB : 4;
28622         unsigned short LSBF : 1;
28623         unsigned short SPNDEN : 1;
28624         unsigned short SLNDEN : 1;
28625         unsigned short SCKDEN : 1;
28626 #else
28627         unsigned short SCKDEN : 1;
28628         unsigned short SLNDEN : 1;
28629         unsigned short SPNDEN : 1;
28630         unsigned short LSBF : 1;
28631         unsigned short SPB : 4;
28632         unsigned short SSLKP : 1;
28633         unsigned short SSLA : 3;
28634         unsigned short BRDV : 2;
28635         unsigned short CPOL : 1;
28636         unsigned short CPHA : 1;
28637 #endif
28638     } BIT;
28639     } SPCMD5;
28640     union {
28641         unsigned short WORD;
28642         struct {
28643
28644 #ifdef __RX_LITTLE_ENDIAN__
28645         unsigned short CPHA : 1;
28646         unsigned short CPOL : 1;
28647         unsigned short BRDV : 2;
28648         unsigned short SSLA : 3;
28649         unsigned short SSLKP : 1;
28650         unsigned short SPB : 4;
28651         unsigned short LSBF : 1;
28652         unsigned short SPNDEN : 1;
28653         unsigned short SLNDEN : 1;
28654         unsigned short SCKDEN : 1;
28655 #else
28656         unsigned short SCKDEN : 1;
28657         unsigned short SLNDEN : 1;
28658         unsigned short SPNDEN : 1;
28659         unsigned short LSBF : 1;
28660         unsigned short SPB : 4;
28661         unsigned short SSLKP : 1;
28662         unsigned short SSLA : 3;
28663         unsigned short BRDV : 2;
28664         unsigned short CPOL : 1;
28665         unsigned short CPHA : 1;
28666 #endif
28667     } BIT;
28668     } SPCMD6;
28669     union {
28670         unsigned short WORD;
28671         struct {
28672
28673 #ifdef __RX_LITTLE_ENDIAN__
28674         unsigned short CPHA : 1;
28675         unsigned short CPOL : 1;
28676         unsigned short BRDV : 2;
28677         unsigned short SSLA : 3;
28678         unsigned short SSLKP : 1;
28679         unsigned short SPB : 4;
28680         unsigned short LSBF : 1;
28681         unsigned short SPNDEN : 1;
28682         unsigned short SLNDEN : 1;
28683         unsigned short SCKDEN : 1;
28684 #else
```

```

28685         unsigned short SCKDEN : 1;
28686         unsigned short SLNDEN : 1;
28687         unsigned short SPNDEN : 1;
28688         unsigned short LSBF : 1;
28689         unsigned short SPB : 4;
28690         unsigned short SSLKP : 1;
28691         unsigned short SSLA : 3;
28692         unsigned short BRDV : 2;
28693         unsigned short CPOL : 1;
28694         unsigned short CPHA : 1;
28695     #endif
28696     } BIT;
28697     } SPCMD7;
28698     union {
28699         unsigned char BYTE;
28700     struct {
28701
28702     #ifdef __RX_LITTLE_ENDIAN__
28703         unsigned char BYSW : 1;
28704         unsigned char : 7;
28705     #else
28706         unsigned char : 7;
28707         unsigned char BYSW : 1;
28708     #endif
28709     } BIT;
28710     } SPDCCR2;
28711 } st_rspi_t;
28712
28713 typedef struct st_rtc {
28714     union {
28715         unsigned char BYTE;
28716     struct {
28717
28718     #ifdef __RX_LITTLE_ENDIAN__
28719         unsigned char F64HZ : 1;
28720         unsigned char F32HZ : 1;
28721         unsigned char F16HZ : 1;
28722         unsigned char F8HZ : 1;
28723         unsigned char F4HZ : 1;
28724         unsigned char F2HZ : 1;
28725         unsigned char F1HZ : 1;
28726         unsigned char : 1;
28727     #else
28728         unsigned char : 1;
28729         unsigned char F1HZ : 1;
28730         unsigned char F2HZ : 1;
28731         unsigned char F4HZ : 1;
28732         unsigned char F8HZ : 1;
28733         unsigned char F16HZ : 1;
28734         unsigned char F32HZ : 1;
28735         unsigned char F64HZ : 1;
28736     #endif
28737     } BIT;
28738     } R64CNT;
28739     char          wk0[1];
28740     union {
28741         union {
28742             unsigned char BYTE;
28743         struct {
28744
28745     #ifdef __RX_LITTLE_ENDIAN__
28746         unsigned char SEC1 : 4;
28747         unsigned char SEC10 : 3;
28748         unsigned char : 1;
28749     #else
28750         unsigned char : 1;
28751         unsigned char SEC10 : 3;
28752         unsigned char SEC1 : 4;
28753     #endif
28754     } BIT;
28755     } RSECCNT;
28756     union {
28757         unsigned char BYTE;
28758     struct {
28759
28760     #ifdef __RX_LITTLE_ENDIAN__
28761         unsigned char BCNT : 8;
28762     #else
28763         unsigned char BCNT : 8;
28764     #endif
28765     } BIT;
28766     } BCNT0;
28767     };
28768     char          wk1[1];
28769     union {
28770         union {
28771             unsigned char BYTE;

```

```

28772     struct {
28773
28774 #ifdef __RX_LITTLE_ENDIAN__
28775     unsigned char MIN1 : 4;
28776     unsigned char MIN10 : 3;
28777     unsigned char : 1;
28778 #else
28779     unsigned char : 1;
28780     unsigned char MIN10 : 3;
28781     unsigned char MIN1 : 4;
28782 #endif
28783     } BIT;
28784     } RMINCNT;
28785     union {
28786     unsigned char BYTE;
28787     struct {
28788
28789 #ifdef __RX_LITTLE_ENDIAN__
28790     unsigned char BCNT : 8;
28791 #else
28792     unsigned char BCNT : 8;
28793 #endif
28794     } BIT;
28795     } BCNT1;
28796     };
28797     char          wk2[1];
28798     union {
28799     union {
28800     unsigned char BYTE;
28801     struct {
28802
28803 #ifdef __RX_LITTLE_ENDIAN__
28804     unsigned char HR1 : 4;
28805     unsigned char HR10 : 2;
28806     unsigned char PM : 1;
28807     unsigned char : 1;
28808 #else
28809     unsigned char : 1;
28810     unsigned char PM : 1;
28811     unsigned char HR10 : 2;
28812     unsigned char HR1 : 4;
28813 #endif
28814     } BIT;
28815     } RHRCNT;
28816     union {
28817     unsigned char BYTE;
28818     struct {
28819
28820 #ifdef __RX_LITTLE_ENDIAN__
28821     unsigned char BCNT : 8;
28822 #else
28823     unsigned char BCNT : 8;
28824 #endif
28825     } BIT;
28826     } BCNT2;
28827     };
28828     char          wk3[1];
28829     union {
28830     union {
28831     unsigned char BYTE;
28832     struct {
28833
28834 #ifdef __RX_LITTLE_ENDIAN__
28835     unsigned char DAYW : 3;
28836     unsigned char : 5;
28837 #else
28838     unsigned char : 5;
28839     unsigned char DAYW : 3;
28840 #endif
28841     } BIT;
28842     } RWKCNT;
28843     union {
28844     unsigned char BYTE;
28845     struct {
28846
28847 #ifdef __RX_LITTLE_ENDIAN__
28848     unsigned char BCNT : 8;
28849 #else
28850     unsigned char BCNT : 8;
28851 #endif
28852     } BIT;
28853     } BCNT3;
28854     };
28855     char          wk4[1];
28856     union {
28857     unsigned char BYTE;
28858     struct {

```

```

28859
28860 #ifdef __RX_LITTLE_ENDIAN__
28861     unsigned char DATE1 : 4;
28862     unsigned char DATE10 : 2;
28863     unsigned char : 2;
28864 #else
28865     unsigned char : 2;
28866     unsigned char DATE10 : 2;
28867     unsigned char DATE1 : 4;
28868 #endif
28869     } BIT;
28870     } RDAYCNT;
28871     char wk5[1];
28872     union {
28873         unsigned char BYTE;
28874         struct {
28875
28876 #ifdef __RX_LITTLE_ENDIAN__
28877         unsigned char MON1 : 4;
28878         unsigned char MON10 : 1;
28879         unsigned char : 3;
28880 #else
28881         unsigned char : 3;
28882         unsigned char MON10 : 1;
28883         unsigned char MON1 : 4;
28884 #endif
28885         } BIT;
28886         } RMONCNT;
28887         char wk6[1];
28888         union {
28889             unsigned short WORD;
28890             struct {
28891
28892 #ifdef __RX_LITTLE_ENDIAN__
28893             unsigned short YR1 : 4;
28894             unsigned short YR10 : 4;
28895             unsigned short : 8;
28896 #else
28897             unsigned short : 8;
28898             unsigned short YR10 : 4;
28899             unsigned short YR1 : 4;
28900 #endif
28901             } BIT;
28902             } RYRCNT;
28903             union {
28904                 union {
28905                     unsigned char BYTE;
28906                     struct {
28907
28908 #ifdef __RX_LITTLE_ENDIAN__
28909                     unsigned char SEC1 : 4;
28910                     unsigned char SEC10 : 3;
28911                     unsigned char ENB : 1;
28912 #else
28913                     unsigned char ENB : 1;
28914                     unsigned char SEC10 : 3;
28915                     unsigned char SEC1 : 4;
28916 #endif
28917                     } BIT;
28918                     } RSECAR;
28919                     union {
28920                         unsigned char BYTE;
28921                         struct {
28922
28923 #ifdef __RX_LITTLE_ENDIAN__
28924                         unsigned char BCNTAR : 8;
28925 #else
28926                         unsigned char BCNTAR : 8;
28927 #endif
28928                         } BIT;
28929                         } BCNT0AR;
28930                     };
28931                     char wk7[1];
28932                     union {
28933                         union {
28934                             unsigned char BYTE;
28935                             struct {
28936
28937 #ifdef __RX_LITTLE_ENDIAN__
28938                             unsigned char MIN1 : 4;
28939                             unsigned char MIN10 : 3;
28940                             unsigned char ENB : 1;
28941 #else
28942                             unsigned char ENB : 1;
28943                             unsigned char MIN10 : 3;
28944                             unsigned char MIN1 : 4;
28945 #endif

```

```

28946     } BIT;
28947     } RMINAR;
28948     union {
28949         unsigned char BYTE;
28950     struct {
28951
28952 #ifdef __RX_LITTLE_ENDIAN__
28953         unsigned char BCNTAR : 8;
28954 #else
28955         unsigned char BCNTAR : 8;
28956 #endif
28957     } BIT;
28958     } BCNT1AR;
28959 };
28960 char          wk8[1];
28961 union {
28962     union {
28963         unsigned char BYTE;
28964     struct {
28965
28966 #ifdef __RX_LITTLE_ENDIAN__
28967         unsigned char HR1 : 4;
28968         unsigned char HR10 : 2;
28969         unsigned char PM : 1;
28970         unsigned char ENB : 1;
28971 #else
28972         unsigned char ENB : 1;
28973         unsigned char PM : 1;
28974         unsigned char HR10 : 2;
28975         unsigned char HR1 : 4;
28976 #endif
28977     } BIT;
28978     } RHRAR;
28979     union {
28980         unsigned char BYTE;
28981     struct {
28982
28983 #ifdef __RX_LITTLE_ENDIAN__
28984         unsigned char BCNTAR : 8;
28985 #else
28986         unsigned char BCNTAR : 8;
28987 #endif
28988     } BIT;
28989     } BCNT2AR;
28990 };
28991 char          wk9[1];
28992 union {
28993     union {
28994         unsigned char BYTE;
28995     struct {
28996
28997 #ifdef __RX_LITTLE_ENDIAN__
28998         unsigned char DAYW : 3;
28999         unsigned char : 4;
29000         unsigned char ENB : 1;
29001 #else
29002         unsigned char ENB : 1;
29003         unsigned char : 4;
29004         unsigned char DAYW : 3;
29005 #endif
29006     } BIT;
29007     } RWKAR;
29008     union {
29009         unsigned char BYTE;
29010     struct {
29011
29012 #ifdef __RX_LITTLE_ENDIAN__
29013         unsigned char BCNTAR : 8;
29014 #else
29015         unsigned char BCNTAR : 8;
29016 #endif
29017     } BIT;
29018     } BCNT3AR;
29019 };
29020 char          wk10[1];
29021 union {
29022     union {
29023         unsigned char BYTE;
29024     struct {
29025
29026 #ifdef __RX_LITTLE_ENDIAN__
29027         unsigned char DATE1 : 4;
29028         unsigned char DATE10 : 2;
29029         unsigned char : 1;
29030         unsigned char ENB : 1;
29031 #else
29032         unsigned char ENB : 1;

```

```
29033         unsigned char : 1;
29034         unsigned char DATE10 : 2;
29035         unsigned char DATE1 : 4;
29036     #endif
29037     } BIT;
29038     } RDAYAR;
29039     union {
29040         unsigned char BYTE;
29041         struct {
29042
29043     #ifdef __RX_LITTLE_ENDIAN__
29044         unsigned char ENB : 8;
29045     #else
29046         unsigned char ENB : 8;
29047     #endif
29048     } BIT;
29049     } BCNT0AER;
29050     };
29051     char          wk11[1];
29052     union {
29053         union {
29054             unsigned char BYTE;
29055             struct {
29056
29057     #ifdef __RX_LITTLE_ENDIAN__
29058         unsigned char MON1 : 4;
29059         unsigned char MON10 : 1;
29060         unsigned char : 2;
29061         unsigned char ENB : 1;
29062     #else
29063         unsigned char ENB : 1;
29064         unsigned char : 2;
29065         unsigned char MON10 : 1;
29066         unsigned char MON1 : 4;
29067     #endif
29068     } BIT;
29069     } RMONAR;
29070     union {
29071         unsigned char BYTE;
29072         struct {
29073
29074     #ifdef __RX_LITTLE_ENDIAN__
29075         unsigned char ENB : 8;
29076     #else
29077         unsigned char ENB : 8;
29078     #endif
29079     } BIT;
29080     } BCNT1AER;
29081     };
29082     char          wk12[1];
29083     union {
29084         union {
29085             unsigned short WORD;
29086             struct {
29087
29088     #ifdef __RX_LITTLE_ENDIAN__
29089         unsigned short YR1 : 4;
29090         unsigned short YR10 : 4;
29091         unsigned short : 8;
29092     #else
29093         unsigned short : 8;
29094         unsigned short YR10 : 4;
29095         unsigned short YR1 : 4;
29096     #endif
29097     } BIT;
29098     } RYRAR;
29099     union {
29100         unsigned short WORD;
29101         struct {
29102
29103     #ifdef __RX_LITTLE_ENDIAN__
29104         unsigned short ENB : 8;
29105         unsigned short : 8;
29106     #else
29107         unsigned short : 8;
29108         unsigned short ENB : 8;
29109     #endif
29110     } BIT;
29111     } BCNT2AER;
29112     };
29113     union {
29114         union {
29115             unsigned char BYTE;
29116             struct {
29117
29118     #ifdef __RX_LITTLE_ENDIAN__
29119         unsigned char : 7;
```

```

29120         unsigned char ENB : 1;
29121 #else
29122         unsigned char ENB : 1;
29123         unsigned char : 7;
29124 #endif
29125     } BIT;
29126     } RYRAREN;
29127     union {
29128         unsigned char BYTE;
29129     struct {
29130
29131 #ifdef __RX_LITTLE_ENDIAN__
29132         unsigned char ENB : 8;
29133 #else
29134         unsigned char ENB : 8;
29135 #endif
29136     } BIT;
29137     } BCNT3AER;
29138 };
29139 char          wk13[3];
29140 union {
29141     unsigned char BYTE;
29142     struct {
29143
29144 #ifdef __RX_LITTLE_ENDIAN__
29145         unsigned char AIE : 1;
29146         unsigned char CIE : 1;
29147         unsigned char PIE : 1;
29148         unsigned char RTCOS : 1;
29149         unsigned char PES : 4;
29150 #else
29151         unsigned char PES : 4;
29152         unsigned char RTCOS : 1;
29153         unsigned char PIE : 1;
29154         unsigned char CIE : 1;
29155         unsigned char AIE : 1;
29156 #endif
29157     } BIT;
29158     } RCR1;
29159 char          wk14[1];
29160 union {
29161     unsigned char BYTE;
29162     struct {
29163
29164 #ifdef __RX_LITTLE_ENDIAN__
29165         unsigned char START : 1;
29166         unsigned char RESET : 1;
29167         unsigned char ADJ30 : 1;
29168         unsigned char RTCOE : 1;
29169         unsigned char AADJE : 1;
29170         unsigned char AADJP : 1;
29171         unsigned char HR24 : 1;
29172         unsigned char CNTMD : 1;
29173 #else
29174         unsigned char CNTMD : 1;
29175         unsigned char HR24 : 1;
29176         unsigned char AADJP : 1;
29177         unsigned char AADJE : 1;
29178         unsigned char RTCOE : 1;
29179         unsigned char ADJ30 : 1;
29180         unsigned char RESET : 1;
29181         unsigned char START : 1;
29182 #endif
29183     } BIT;
29184     } RCR2;
29185 char          wk15[1];
29186 union {
29187     unsigned char BYTE;
29188     struct {
29189
29190 #ifdef __RX_LITTLE_ENDIAN__
29191         unsigned char RTCEN : 1;
29192         unsigned char RTCDV : 3;
29193         unsigned char : 4;
29194 #else
29195         unsigned char : 4;
29196         unsigned char RTCDV : 3;
29197         unsigned char RTCEN : 1;
29198 #endif
29199     } BIT;
29200     } RCR3;
29201 char          wk16[1];
29202 union {
29203     unsigned char BYTE;
29204     struct {
29205
29206 #ifdef __RX_LITTLE_ENDIAN__

```

```

29207         unsigned char RCKSEL : 1;
29208         unsigned char   : 7;
29209 #else
29210         unsigned char   : 7;
29211         unsigned char RCKSEL : 1;
29212 #endif
29213     } BIT;
29214     } RCR4;
29215     char          wk17[1];
29216     union {
29217         unsigned short WORD;
29218         struct {
29219
29220 #ifdef __RX_LITTLE_ENDIAN__
29221         unsigned short RFC : 1;
29222         unsigned short   : 15;
29223 #else
29224         unsigned short   : 15;
29225         unsigned short RFC : 1;
29226 #endif
29227     } BIT;
29228     } RFRH;
29229     union {
29230         unsigned short WORD;
29231         struct {
29232
29233 #ifdef __RX_LITTLE_ENDIAN__
29234         unsigned short RFC : 16;
29235 #else
29236         unsigned short RFC : 16;
29237 #endif
29238     } BIT;
29239     } RFRL;
29240     union {
29241         unsigned char BYTE;
29242         struct {
29243
29244 #ifdef __RX_LITTLE_ENDIAN__
29245         unsigned char ADJ : 6;
29246         unsigned char PMADJ : 2;
29247 #else
29248         unsigned char PMADJ : 2;
29249         unsigned char ADJ : 6;
29250 #endif
29251     } BIT;
29252     } RADI;
29253     char          wk18[17];
29254     union {
29255         unsigned char BYTE;
29256         struct {
29257
29258 #ifdef __RX_LITTLE_ENDIAN__
29259         unsigned char TCCT : 2;
29260         unsigned char TCST : 1;
29261         unsigned char   : 1;
29262         unsigned char TCNF : 2;
29263         unsigned char   : 1;
29264         unsigned char TCEN : 1;
29265 #else
29266         unsigned char TCEN : 1;
29267         unsigned char   : 1;
29268         unsigned char TCNF : 2;
29269         unsigned char   : 1;
29270         unsigned char TCST : 1;
29271         unsigned char TCCT : 2;
29272 #endif
29273     } BIT;
29274     } RTCCR0;
29275     char          wk19[1];
29276     union {
29277         unsigned char BYTE;
29278         struct {
29279
29280 #ifdef __RX_LITTLE_ENDIAN__
29281         unsigned char TCCT : 2;
29282         unsigned char TCST : 1;
29283         unsigned char   : 1;
29284         unsigned char TCNF : 2;
29285         unsigned char   : 1;
29286         unsigned char TCEN : 1;
29287 #else
29288         unsigned char TCEN : 1;
29289         unsigned char   : 1;
29290         unsigned char TCNF : 2;
29291         unsigned char   : 1;
29292         unsigned char TCST : 1;
29293         unsigned char TCCT : 2;

```

```

29294 #endif
29295     } BIT;
29296     } RTCCR1;
29297     char          wk20[1];
29298     union {
29299         unsigned char BYTE;
29300         struct {
29301
29302 #ifdef __RX_LITTLE_ENDIAN__
29303         unsigned char TCCT : 2;
29304         unsigned char TCST : 1;
29305         unsigned char   : 1;
29306         unsigned char TCNF : 2;
29307         unsigned char   : 1;
29308         unsigned char TCEN : 1;
29309 #else
29310         unsigned char TCEN : 1;
29311         unsigned char   : 1;
29312         unsigned char TCNF : 2;
29313         unsigned char   : 1;
29314         unsigned char TCST : 1;
29315         unsigned char TCCT : 2;
29316 #endif
29317     } BIT;
29318     } RTCCR2;
29319     char          wk21[13];
29320     union {
29321         union {
29322             unsigned char BYTE;
29323             struct {
29324
29325 #ifdef __RX_LITTLE_ENDIAN__
29326             unsigned char SEC1 : 4;
29327             unsigned char SEC10 : 3;
29328             unsigned char   : 1;
29329 #else
29330             unsigned char   : 1;
29331             unsigned char SEC10 : 3;
29332             unsigned char SEC1 : 4;
29333 #endif
29334         } BIT;
29335         } RSECCP0;
29336         union {
29337             unsigned char BYTE;
29338             struct {
29339
29340 #ifdef __RX_LITTLE_ENDIAN__
29341             unsigned char BCNTCP0 : 8;
29342 #else
29343             unsigned char BCNTCP0 : 8;
29344 #endif
29345         } BIT;
29346         } BCNT0CP0;
29347     };
29348     char          wk22[1];
29349     union {
29350         union {
29351             unsigned char BYTE;
29352             struct {
29353
29354 #ifdef __RX_LITTLE_ENDIAN__
29355             unsigned char MIN1 : 4;
29356             unsigned char MIN10 : 3;
29357             unsigned char   : 1;
29358 #else
29359             unsigned char   : 1;
29360             unsigned char MIN10 : 3;
29361             unsigned char MIN1 : 4;
29362 #endif
29363         } BIT;
29364         } RMINCP0;
29365         union {
29366             unsigned char BYTE;
29367             struct {
29368
29369 #ifdef __RX_LITTLE_ENDIAN__
29370             unsigned char BCNTCP0 : 8;
29371 #else
29372             unsigned char BCNTCP0 : 8;
29373 #endif
29374         } BIT;
29375         } BCNT1CP0;
29376     };
29377     char          wk23[1];
29378     union {
29379         union {
29380             unsigned char BYTE;

```

```

29381     struct {
29382
29383 #ifdef __RX_LITTLE_ENDIAN__
29384     unsigned char HR1 : 4;
29385     unsigned char HR10 : 2;
29386     unsigned char PM : 1;
29387     unsigned char : 1;
29388 #else
29389     unsigned char : 1;
29390     unsigned char PM : 1;
29391     unsigned char HR10 : 2;
29392     unsigned char HR1 : 4;
29393 #endif
29394     } BIT;
29395     } RHRCP0;
29396     union {
29397     unsigned char BYTE;
29398     struct {
29399
29400 #ifdef __RX_LITTLE_ENDIAN__
29401     unsigned char BCNTCP0 : 8;
29402 #else
29403     unsigned char BCNTCP0 : 8;
29404 #endif
29405     } BIT;
29406     } BCNT2CP0;
29407     };
29408     char          wk24[3];
29409     union {
29410     union {
29411     unsigned char BYTE;
29412     struct {
29413
29414 #ifdef __RX_LITTLE_ENDIAN__
29415     unsigned char DATE1 : 4;
29416     unsigned char DATE10 : 2;
29417     unsigned char : 2;
29418 #else
29419     unsigned char : 2;
29420     unsigned char DATE10 : 2;
29421     unsigned char DATE1 : 4;
29422 #endif
29423     } BIT;
29424     } RDAYCP0;
29425     union {
29426     unsigned char BYTE;
29427     struct {
29428
29429 #ifdef __RX_LITTLE_ENDIAN__
29430     unsigned char BCNTCP0 : 8;
29431 #else
29432     unsigned char BCNTCP0 : 8;
29433 #endif
29434     } BIT;
29435     } BCNT3CP0;
29436     };
29437     char          wk25[1];
29438     union {
29439     unsigned char BYTE;
29440     struct {
29441
29442 #ifdef __RX_LITTLE_ENDIAN__
29443     unsigned char MON1 : 4;
29444     unsigned char MON10 : 1;
29445     unsigned char : 3;
29446 #else
29447     unsigned char : 3;
29448     unsigned char MON10 : 1;
29449     unsigned char MON1 : 4;
29450 #endif
29451     } BIT;
29452     } RMONCP0;
29453     char          wk26[5];
29454     union {
29455     union {
29456     unsigned char BYTE;
29457     struct {
29458
29459 #ifdef __RX_LITTLE_ENDIAN__
29460     unsigned char SEC1 : 4;
29461     unsigned char SEC10 : 3;
29462     unsigned char : 1;
29463 #else
29464     unsigned char : 1;
29465     unsigned char SEC10 : 3;
29466     unsigned char SEC1 : 4;
29467 #endif

```

```

29468     } BIT;
29469     } RSECCP1;
29470     union {
29471         unsigned char BYTE;
29472         struct {
29473
29474 #ifdef __RX_LITTLE_ENDIAN__
29475         unsigned char BCNTCP1 : 8;
29476 #else
29477         unsigned char BCNTCP1 : 8;
29478 #endif
29479     } BIT;
29480     } BCNT0CP1;
29481 };
29482 char          wk27[1];
29483 union {
29484     union {
29485         unsigned char BYTE;
29486         struct {
29487
29488 #ifdef __RX_LITTLE_ENDIAN__
29489         unsigned char MIN1 : 4;
29490         unsigned char MIN10 : 3;
29491         unsigned char   : 1;
29492 #else
29493         unsigned char   : 1;
29494         unsigned char MIN10 : 3;
29495         unsigned char MIN1 : 4;
29496 #endif
29497     } BIT;
29498     } RMINCP1;
29499     union {
29500         unsigned char BYTE;
29501         struct {
29502
29503 #ifdef __RX_LITTLE_ENDIAN__
29504         unsigned char BCNTCP1 : 8;
29505 #else
29506         unsigned char BCNTCP1 : 8;
29507 #endif
29508     } BIT;
29509     } BCNT1CP1;
29510 };
29511 char          wk28[1];
29512 union {
29513     union {
29514         unsigned char BYTE;
29515         struct {
29516
29517 #ifdef __RX_LITTLE_ENDIAN__
29518         unsigned char HR1 : 4;
29519         unsigned char HR10 : 2;
29520         unsigned char PM : 1;
29521         unsigned char   : 1;
29522 #else
29523         unsigned char   : 1;
29524         unsigned char PM : 1;
29525         unsigned char HR10 : 2;
29526         unsigned char HR1 : 4;
29527 #endif
29528     } BIT;
29529     } RHRC1;
29530     union {
29531         unsigned char BYTE;
29532         struct {
29533
29534 #ifdef __RX_LITTLE_ENDIAN__
29535         unsigned char BCNTCP1 : 8;
29536 #else
29537         unsigned char BCNTCP1 : 8;
29538 #endif
29539     } BIT;
29540     } BCNT2CP1;
29541 };
29542 char          wk29[3];
29543 union {
29544     union {
29545         unsigned char BYTE;
29546         struct {
29547
29548 #ifdef __RX_LITTLE_ENDIAN__
29549         unsigned char DATE1 : 4;
29550         unsigned char DATE10 : 2;
29551         unsigned char   : 2;
29552 #else
29553         unsigned char   : 2;
29554         unsigned char DATE10 : 2;

```

```

29555         unsigned char DATE1 : 4;
29556 #endif
29557     } BIT;
29558     } RDAYCP1;
29559     union {
29560         unsigned char BYTE;
29561         struct {
29562
29563 #ifdef __RX_LITTLE_ENDIAN__
29564         unsigned char BCNTCP1 : 8;
29565 #else
29566         unsigned char BCNTCP1 : 8;
29567 #endif
29568     } BIT;
29569     } BCNT3CP1;
29570 };
29571 char          wk30[1];
29572 union {
29573     unsigned char BYTE;
29574     struct {
29575
29576 #ifdef __RX_LITTLE_ENDIAN__
29577     unsigned char MON1 : 4;
29578     unsigned char MON10 : 1;
29579     unsigned char   : 3;
29580 #else
29581     unsigned char   : 3;
29582     unsigned char MON10 : 1;
29583     unsigned char MON1 : 4;
29584 #endif
29585     } BIT;
29586     } RMONCP1;
29587 char          wk31[5];
29588 union {
29589     union {
29590         unsigned char BYTE;
29591         struct {
29592
29593 #ifdef __RX_LITTLE_ENDIAN__
29594         unsigned char SEC1 : 4;
29595         unsigned char SEC10 : 3;
29596         unsigned char   : 1;
29597 #else
29598         unsigned char   : 1;
29599         unsigned char SEC10 : 3;
29600         unsigned char SEC1 : 4;
29601 #endif
29602     } BIT;
29603     } RSECCP2;
29604     union {
29605         unsigned char BYTE;
29606         struct {
29607
29608 #ifdef __RX_LITTLE_ENDIAN__
29609         unsigned char BCNTCP2 : 8;
29610 #else
29611         unsigned char BCNTCP2 : 8;
29612 #endif
29613     } BIT;
29614     } BCNT0CP2;
29615 };
29616 char          wk32[1];
29617 union {
29618     union {
29619         unsigned char BYTE;
29620         struct {
29621
29622 #ifdef __RX_LITTLE_ENDIAN__
29623         unsigned char MIN1 : 4;
29624         unsigned char MIN10 : 3;
29625         unsigned char   : 1;
29626 #else
29627         unsigned char   : 1;
29628         unsigned char MIN10 : 3;
29629         unsigned char MIN1 : 4;
29630 #endif
29631     } BIT;
29632     } RMINCP2;
29633     union {
29634         unsigned char BYTE;
29635         struct {
29636
29637 #ifdef __RX_LITTLE_ENDIAN__
29638         unsigned char BCNTCP2 : 8;
29639 #else
29640         unsigned char BCNTCP2 : 8;
29641 #endif

```

```

29642     } BIT;
29643     } BCNT1CP2;
29644 };
29645 char          wk33[1];
29646 union {
29647     union {
29648         unsigned char BYTE;
29649     struct {
29650
29651 #ifdef __RX_LITTLE_ENDIAN__
29652     unsigned char HR1 : 4;
29653     unsigned char HR10 : 2;
29654     unsigned char PM : 1;
29655     unsigned char : 1;
29656 #else
29657     unsigned char : 1;
29658     unsigned char PM : 1;
29659     unsigned char HR10 : 2;
29660     unsigned char HR1 : 4;
29661 #endif
29662     } BIT;
29663     } RHRCP2;
29664     union {
29665         unsigned char BYTE;
29666     struct {
29667
29668 #ifdef __RX_LITTLE_ENDIAN__
29669     unsigned char BCNTCP2 : 8;
29670 #else
29671     unsigned char BCNTCP2 : 8;
29672 #endif
29673     } BIT;
29674     } BCNT2CP2;
29675 };
29676 char          wk34[3];
29677 union {
29678     union {
29679         unsigned char BYTE;
29680     struct {
29681
29682 #ifdef __RX_LITTLE_ENDIAN__
29683     unsigned char DATE1 : 4;
29684     unsigned char DATE10 : 2;
29685     unsigned char : 2;
29686 #else
29687     unsigned char : 2;
29688     unsigned char DATE10 : 2;
29689     unsigned char DATE1 : 4;
29690 #endif
29691     } BIT;
29692     } RDAYCP2;
29693     union {
29694         unsigned char BYTE;
29695     struct {
29696
29697 #ifdef __RX_LITTLE_ENDIAN__
29698     unsigned char BCNTCP2 : 8;
29699 #else
29700     unsigned char BCNTCP2 : 8;
29701 #endif
29702     } BIT;
29703     } BCNT3CP2;
29704 };
29705 char          wk35[1];
29706 union {
29707     unsigned char BYTE;
29708     struct {
29709
29710 #ifdef __RX_LITTLE_ENDIAN__
29711     unsigned char MON1 : 4;
29712     unsigned char MON10 : 1;
29713     unsigned char : 3;
29714 #else
29715     unsigned char : 3;
29716     unsigned char MON10 : 1;
29717     unsigned char MON1 : 4;
29718 #endif
29719     } BIT;
29720     } RMONCP2;
29721 } st_rtc_t;
29722
29723 typedef struct st_s12ad {
29724     union {
29725         unsigned short WORD;
29726     struct {
29727
29728 #ifdef __RX_LITTLE_ENDIAN__

```

```

29729         unsigned short DBLANS : 5;
29730         unsigned short : 1;
29731         unsigned short GBADIE : 1;
29732         unsigned short DBLE : 1;
29733         unsigned short EXTRG : 1;
29734         unsigned short TRGE : 1;
29735         unsigned short : 2;
29736         unsigned short ADIE : 1;
29737         unsigned short ADCS : 2;
29738         unsigned short ADST : 1;
29739 #else
29740         unsigned short ADST : 1;
29741         unsigned short ADCS : 2;
29742         unsigned short ADIE : 1;
29743         unsigned short : 2;
29744         unsigned short TRGE : 1;
29745         unsigned short EXTRG : 1;
29746         unsigned short DBLE : 1;
29747         unsigned short GBADIE : 1;
29748         unsigned short : 1;
29749         unsigned short DBLANS : 5;
29750 #endif
29751     } BIT;
29752     } ADCSR;
29753     char          wk0[2];
29754     union {
29755         unsigned short WORD;
29756         struct {
29757
29758 #ifdef __RX_LITTLE_ENDIAN__
29759         unsigned short ANSA000 : 1;
29760         unsigned short ANSA001 : 1;
29761         unsigned short ANSA002 : 1;
29762         unsigned short ANSA003 : 1;
29763         unsigned short ANSA004 : 1;
29764         unsigned short ANSA005 : 1;
29765         unsigned short ANSA006 : 1;
29766         unsigned short ANSA007 : 1;
29767         unsigned short : 8;
29768 #else
29769         unsigned short : 8;
29770         unsigned short ANSA007 : 1;
29771         unsigned short ANSA006 : 1;
29772         unsigned short ANSA005 : 1;
29773         unsigned short ANSA004 : 1;
29774         unsigned short ANSA003 : 1;
29775         unsigned short ANSA002 : 1;
29776         unsigned short ANSA001 : 1;
29777         unsigned short ANSA000 : 1;
29778 #endif
29779     } BIT;
29780     } ADANSA0;
29781     char          wk1[2];
29782     union {
29783         unsigned short WORD;
29784         struct {
29785
29786 #ifdef __RX_LITTLE_ENDIAN__
29787         unsigned short ADS000 : 1;
29788         unsigned short ADS001 : 1;
29789         unsigned short ADS002 : 1;
29790         unsigned short ADS003 : 1;
29791         unsigned short ADS004 : 1;
29792         unsigned short ADS005 : 1;
29793         unsigned short ADS006 : 1;
29794         unsigned short ADS007 : 1;
29795         unsigned short : 8;
29796 #else
29797         unsigned short : 8;
29798         unsigned short ADS007 : 1;
29799         unsigned short ADS006 : 1;
29800         unsigned short ADS005 : 1;
29801         unsigned short ADS004 : 1;
29802         unsigned short ADS003 : 1;
29803         unsigned short ADS002 : 1;
29804         unsigned short ADS001 : 1;
29805         unsigned short ADS000 : 1;
29806 #endif
29807     } BIT;
29808     } ADADS0;
29809     char          wk2[2];
29810     union {
29811         unsigned char BYTE;
29812         struct {
29813
29814 #ifdef __RX_LITTLE_ENDIAN__
29815         unsigned char ADC : 3;

```

```

29816         unsigned char : 4;
29817         unsigned char AVEE : 1;
29818 #else
29819         unsigned char AVEE : 1;
29820         unsigned char : 4;
29821         unsigned char ADC : 3;
29822 #endif
29823     } BIT;
29824     } ADADC;
29825     char          wk3[1];
29826     union {
29827         unsigned short WORD;
29828     struct {
29829
29830 #ifdef __RX_LITTLE_ENDIAN__
29831         unsigned short : 1;
29832         unsigned short ADPRC : 2;
29833         unsigned short : 2;
29834         unsigned short ACE : 1;
29835         unsigned short : 2;
29836         unsigned short DIAGVAL : 2;
29837         unsigned short DIAGLD : 1;
29838         unsigned short DIAGM : 1;
29839         unsigned short : 3;
29840         unsigned short ADRFMT : 1;
29841 #else
29842         unsigned short ADRFMT : 1;
29843         unsigned short : 3;
29844         unsigned short DIAGM : 1;
29845         unsigned short DIAGLD : 1;
29846         unsigned short DIAGVAL : 2;
29847         unsigned short : 2;
29848         unsigned short ACE : 1;
29849         unsigned short : 2;
29850         unsigned short ADPRC : 2;
29851         unsigned short : 1;
29852 #endif
29853     } BIT;
29854     } ADCER;
29855     union {
29856         unsigned short WORD;
29857     struct {
29858
29859 #ifdef __RX_LITTLE_ENDIAN__
29860         unsigned short TRSB : 6;
29861         unsigned short : 2;
29862         unsigned short TRSA : 6;
29863         unsigned short : 2;
29864 #else
29865         unsigned short : 2;
29866         unsigned short TRSA : 6;
29867         unsigned short : 2;
29868         unsigned short TRSB : 6;
29869 #endif
29870     } BIT;
29871     } ADSTRGR;
29872     char          wk4[2];
29873     union {
29874         unsigned short WORD;
29875     struct {
29876
29877 #ifdef __RX_LITTLE_ENDIAN__
29878         unsigned short ANSB000 : 1;
29879         unsigned short ANSB001 : 1;
29880         unsigned short ANSB002 : 1;
29881         unsigned short ANSB003 : 1;
29882         unsigned short ANSB004 : 1;
29883         unsigned short ANSB005 : 1;
29884         unsigned short ANSB006 : 1;
29885         unsigned short ANSB007 : 1;
29886         unsigned short : 8;
29887 #else
29888         unsigned short : 8;
29889         unsigned short ANSB007 : 1;
29890         unsigned short ANSB006 : 1;
29891         unsigned short ANSB005 : 1;
29892         unsigned short ANSB004 : 1;
29893         unsigned short ANSB003 : 1;
29894         unsigned short ANSB002 : 1;
29895         unsigned short ANSB001 : 1;
29896         unsigned short ANSB000 : 1;
29897 #endif
29898     } BIT;
29899     } ADANSB0;
29900     char          wk5[2];
29901     union {
29902         unsigned short WORD;

```

```
29903     } ADDBLDR;
29904     char          wk6[4];
29905     union {
29906         unsigned short WORD;
29907         union {
29908             struct {
29909
29910 #ifdef __RX_LITTLE_ENDIAN__
29911             unsigned short AD : 12;
29912             unsigned short : 2;
29913             unsigned short DIAGST : 2;
29914 #else
29915             unsigned short DIAGST : 2;
29916             unsigned short : 2;
29917             unsigned short AD : 12;
29918 #endif
29919         } RIGHT;
29920         struct {
29921
29922 #ifdef __RX_LITTLE_ENDIAN__
29923             unsigned short DIAGST : 2;
29924             unsigned short : 2;
29925             unsigned short AD : 12;
29926 #else
29927             unsigned short AD : 12;
29928             unsigned short : 2;
29929             unsigned short DIAGST : 2;
29930 #endif
29931         } LEFT;
29932         } BIT;
29933     } ADDR;
29934     unsigned short ADDR0;
29935     unsigned short ADDR1;
29936     unsigned short ADDR2;
29937     unsigned short ADDR3;
29938     unsigned short ADDR4;
29939     unsigned short ADDR5;
29940     unsigned short ADDR6;
29941     unsigned short ADDR7;
29942     char          wk7[51];
29943     union {
29944         unsigned char BYTE;
29945         struct {
29946
29947 #ifdef __RX_LITTLE_ENDIAN__
29948             unsigned char PRO : 2;
29949             unsigned char : 6;
29950 #else
29951             unsigned char : 6;
29952             unsigned char PRO : 2;
29953 #endif
29954         } BIT;
29955     } ADSAMPR;
29956     char          wk8[2];
29957     union {
29958         unsigned short WORD;
29959         struct {
29960
29961 #ifdef __RX_LITTLE_ENDIAN__
29962             unsigned short SSTSH : 8;
29963             unsigned short SHANS : 3;
29964             unsigned short : 5;
29965 #else
29966             unsigned short : 5;
29967             unsigned short SHANS : 3;
29968             unsigned short SSTSH : 8;
29969 #endif
29970         } BIT;
29971     } ADSHCR;
29972     char          wk9[6];
29973     union {
29974         unsigned short WORD;
29975         struct {
29976
29977 #ifdef __RX_LITTLE_ENDIAN__
29978             unsigned short : 5;
29979             unsigned short SAM : 1;
29980             unsigned short : 10;
29981 #else
29982             unsigned short : 10;
29983             unsigned short SAM : 1;
29984             unsigned short : 5;
29985 #endif
29986         } BIT;
29987     } ADSAM;
29988     char          wk10[10];
29989     union {
```

```

29990     unsigned char BYTE;
29991     struct {
29992
29993 #ifdef __RX_LITTLE_ENDIAN__
29994     unsigned char ADNDIS : 5;
29995     unsigned char : 3;
29996 #else
29997     unsigned char : 3;
29998     unsigned char ADNDIS : 5;
29999 #endif
30000     } BIT;
30001     } ADDISCR;
30002     char      wk11[1];
30003     union {
30004         unsigned char BYTE;
30005         struct {
30006
30007 #ifdef __RX_LITTLE_ENDIAN__
30008         unsigned char SHMD : 1;
30009         unsigned char : 7;
30010 #else
30011         unsigned char : 7;
30012         unsigned char SHMD : 1;
30013 #endif
30014         } BIT;
30015         } ADSHMSR;
30016         char      wk12[3];
30017         union {
30018             unsigned short WORD;
30019             struct {
30020
30021 #ifdef __RX_LITTLE_ENDIAN__
30022             unsigned short PGS : 1;
30023             unsigned short GBRSCN : 1;
30024             unsigned short : 12;
30025             unsigned short LGRRS : 1;
30026             unsigned short GBRP : 1;
30027 #else
30028             unsigned short GBRP : 1;
30029             unsigned short LGRRS : 1;
30030             unsigned short : 12;
30031             unsigned short GBRSCN : 1;
30032             unsigned short PGS : 1;
30033 #endif
30034             } BIT;
30035             } ADGSPCR;
30036             char      wk13[2];
30037             unsigned short ADDBLDRA;
30038             unsigned short ADDBLDRB;
30039             char      wk14[4];
30040             union {
30041                 unsigned char BYTE;
30042                 struct {
30043
30044 #ifdef __RX_LITTLE_ENDIAN__
30045                 unsigned char MONCOMB : 1;
30046                 unsigned char : 3;
30047                 unsigned char MONCMPA : 1;
30048                 unsigned char MONCMPB : 1;
30049                 unsigned char : 2;
30050 #else
30051                 unsigned char : 2;
30052                 unsigned char MONCMPB : 1;
30053                 unsigned char MONCMPA : 1;
30054                 unsigned char : 3;
30055                 unsigned char MONCOMB : 1;
30056 #endif
30057                 } BIT;
30058                 } ADWINMON;
30059                 char      wk15[3];
30060                 union {
30061                     unsigned short WORD;
30062                     struct {
30063
30064 #ifdef __RX_LITTLE_ENDIAN__
30065                     unsigned short CMPAB : 2;
30066                     unsigned short : 7;
30067                     unsigned short CMPBE : 1;
30068                     unsigned short : 1;
30069                     unsigned short CMPAE : 1;
30070                     unsigned short : 1;
30071                     unsigned short CMPBIE : 1;
30072                     unsigned short WCMPE : 1;
30073                     unsigned short CMPAIE : 1;
30074 #else
30075                     unsigned short CMPAIE : 1;
30076                     unsigned short WCMPE : 1;

```

```

30077         unsigned short CMPBIE : 1;
30078         unsigned short : 1;
30079         unsigned short CMPAE : 1;
30080         unsigned short : 1;
30081         unsigned short CMPBE : 1;
30082         unsigned short : 7;
30083         unsigned short CMPAB : 2;
30084     #endif
30085     } BIT;
30086     } ADCMPCR;
30087     char          wk16[2];
30088     union {
30089         unsigned short WORD;
30090         struct {
30091
30092     #ifdef __RX_LITTLE_ENDIAN__
30093         unsigned short CMPCHA000 : 1;
30094         unsigned short CMPCHA001 : 1;
30095         unsigned short CMPCHA002 : 1;
30096         unsigned short CMPCHA003 : 1;
30097         unsigned short CMPCHA004 : 1;
30098         unsigned short CMPCHA005 : 1;
30099         unsigned short CMPCHA006 : 1;
30100         unsigned short CMPCHA007 : 1;
30101         unsigned short : 8;
30102     #else
30103         unsigned short : 8;
30104         unsigned short CMPCHA007 : 1;
30105         unsigned short CMPCHA006 : 1;
30106         unsigned short CMPCHA005 : 1;
30107         unsigned short CMPCHA004 : 1;
30108         unsigned short CMPCHA003 : 1;
30109         unsigned short CMPCHA002 : 1;
30110         unsigned short CMPCHA001 : 1;
30111         unsigned short CMPCHA000 : 1;
30112     #endif
30113     } BIT;
30114     } ADCMPANSR0;
30115     char          wk17[2];
30116     union {
30117         unsigned short WORD;
30118         struct {
30119
30120     #ifdef __RX_LITTLE_ENDIAN__
30121         unsigned short CMPLCHA000 : 1;
30122         unsigned short CMPLCHA001 : 1;
30123         unsigned short CMPLCHA002 : 1;
30124         unsigned short CMPLCHA003 : 1;
30125         unsigned short CMPLCHA004 : 1;
30126         unsigned short CMPLCHA005 : 1;
30127         unsigned short CMPLCHA006 : 1;
30128         unsigned short CMPLCHA007 : 1;
30129         unsigned short : 8;
30130     #else
30131         unsigned short : 8;
30132         unsigned short CMPLCHA007 : 1;
30133         unsigned short CMPLCHA006 : 1;
30134         unsigned short CMPLCHA005 : 1;
30135         unsigned short CMPLCHA004 : 1;
30136         unsigned short CMPLCHA003 : 1;
30137         unsigned short CMPLCHA002 : 1;
30138         unsigned short CMPLCHA001 : 1;
30139         unsigned short CMPLCHA000 : 1;
30140     #endif
30141     } BIT;
30142     } ADCMPLR0;
30143     char          wk18[2];
30144     unsigned short ADCMPDR0;
30145     unsigned short ADCMPDR1;
30146     union {
30147         unsigned short WORD;
30148         struct {
30149
30150     #ifdef __RX_LITTLE_ENDIAN__
30151         unsigned short CMPSTCHA000 : 1;
30152         unsigned short CMPSTCHA001 : 1;
30153         unsigned short CMPSTCHA002 : 1;
30154         unsigned short CMPSTCHA003 : 1;
30155         unsigned short CMPSTCHA004 : 1;
30156         unsigned short CMPSTCHA005 : 1;
30157         unsigned short CMPSTCHA006 : 1;
30158         unsigned short CMPSTCHA007 : 1;
30159         unsigned short : 8;
30160     #else
30161         unsigned short : 8;
30162         unsigned short CMPSTCHA007 : 1;
30163         unsigned short CMPSTCHA006 : 1;

```

```

30164         unsigned short CMPSTCHA005 : 1;
30165         unsigned short CMPSTCHA004 : 1;
30166         unsigned short CMPSTCHA003 : 1;
30167         unsigned short CMPSTCHA002 : 1;
30168         unsigned short CMPSTCHA001 : 1;
30169         unsigned short CMPSTCHA000 : 1;
30170     #endif
30171     } BIT;
30172     } ADCMPSPSR0;
30173     char          wk19[4];
30174     union {
30175         unsigned char BYTE;
30176         struct {
30177
30178     #ifdef __RX_LITTLE_ENDIAN__
30179         unsigned char CMPCHB : 6;
30180         unsigned char  : 1;
30181         unsigned char CMPLB : 1;
30182     #else
30183         unsigned char CMPLB : 1;
30184         unsigned char  : 1;
30185         unsigned char CMPCHB : 6;
30186     #endif
30187     } BIT;
30188     } ADCMPBNSR;
30189     char          wk20[1];
30190     unsigned short ADWINLLB;
30191     unsigned short ADWINULB;
30192     union {
30193         unsigned char BYTE;
30194         struct {
30195
30196     #ifdef __RX_LITTLE_ENDIAN__
30197         unsigned char CMPSTB : 1;
30198         unsigned char  : 7;
30199     #else
30200         unsigned char  : 7;
30201         unsigned char CMPSTB : 1;
30202     #endif
30203     } BIT;
30204     } ADCMPBSR;
30205     char          wk21[39];
30206     union {
30207         unsigned short WORD;
30208         struct {
30209
30210     #ifdef __RX_LITTLE_ENDIAN__
30211         unsigned short ANSC000 : 1;
30212         unsigned short ANSC001 : 1;
30213         unsigned short ANSC002 : 1;
30214         unsigned short ANSC003 : 1;
30215         unsigned short ANSC004 : 1;
30216         unsigned short ANSC005 : 1;
30217         unsigned short ANSC006 : 1;
30218         unsigned short ANSC007 : 1;
30219         unsigned short  : 8;
30220     #else
30221         unsigned short  : 8;
30222         unsigned short ANSC007 : 1;
30223         unsigned short ANSC006 : 1;
30224         unsigned short ANSC005 : 1;
30225         unsigned short ANSC004 : 1;
30226         unsigned short ANSC003 : 1;
30227         unsigned short ANSC002 : 1;
30228         unsigned short ANSC001 : 1;
30229         unsigned short ANSC000 : 1;
30230     #endif
30231     } BIT;
30232     } ADANSC0;
30233     char          wk22[3];
30234     union {
30235         unsigned char BYTE;
30236         struct {
30237
30238     #ifdef __RX_LITTLE_ENDIAN__
30239         unsigned char TRSC : 6;
30240         unsigned char GCADIE : 1;
30241         unsigned char GRCE : 1;
30242     #else
30243         unsigned char GRCE : 1;
30244         unsigned char GCADIE : 1;
30245         unsigned char TRSC : 6;
30246     #endif
30247     } BIT;
30248     } ADGCTRGR;
30249     char          wk23[6];
30250     unsigned char ADSSTR0;

```

```
30251 unsigned char ADSSTR1;
30252 unsigned char ADSSTR2;
30253 unsigned char ADSSTR3;
30254 unsigned char ADSSTR4;
30255 unsigned char ADSSTR5;
30256 unsigned char ADSSTR6;
30257 unsigned char ADSSTR7;
30258 } st_s12ad_t;
30259
30260 typedef struct st_s12ad1 {
30261     union {
30262         unsigned short WORD;
30263         struct {
30264
30265 #ifdef __RX_LITTLE_ENDIAN__
30266         unsigned short DBLANS : 5;
30267         unsigned short : 1;
30268         unsigned short GBADIE : 1;
30269         unsigned short DBLE : 1;
30270         unsigned short EXTRG : 1;
30271         unsigned short TRGE : 1;
30272         unsigned short : 2;
30273         unsigned short ADIE : 1;
30274         unsigned short ADCS : 2;
30275         unsigned short ADST : 1;
30276 #else
30277         unsigned short ADST : 1;
30278         unsigned short ADCS : 2;
30279         unsigned short ADIE : 1;
30280         unsigned short : 2;
30281         unsigned short TRGE : 1;
30282         unsigned short EXTRG : 1;
30283         unsigned short DBLE : 1;
30284         unsigned short GBADIE : 1;
30285         unsigned short : 1;
30286         unsigned short DBLANS : 5;
30287 #endif
30288     } BIT;
30289     } ADCSR;
30290     char wk0[2];
30291     union {
30292         unsigned short WORD;
30293         struct {
30294
30295 #ifdef __RX_LITTLE_ENDIAN__
30296         unsigned short ANSA000 : 1;
30297         unsigned short ANSA001 : 1;
30298         unsigned short ANSA002 : 1;
30299         unsigned short ANSA003 : 1;
30300         unsigned short ANSA004 : 1;
30301         unsigned short ANSA005 : 1;
30302         unsigned short ANSA006 : 1;
30303         unsigned short ANSA007 : 1;
30304         unsigned short ANSA008 : 1;
30305         unsigned short ANSA009 : 1;
30306         unsigned short ANSA010 : 1;
30307         unsigned short ANSA011 : 1;
30308         unsigned short ANSA012 : 1;
30309         unsigned short ANSA013 : 1;
30310         unsigned short ANSA014 : 1;
30311         unsigned short ANSA015 : 1;
30312 #else
30313         unsigned short ANSA015 : 1;
30314         unsigned short ANSA014 : 1;
30315         unsigned short ANSA013 : 1;
30316         unsigned short ANSA012 : 1;
30317         unsigned short ANSA011 : 1;
30318         unsigned short ANSA010 : 1;
30319         unsigned short ANSA009 : 1;
30320         unsigned short ANSA008 : 1;
30321         unsigned short ANSA007 : 1;
30322         unsigned short ANSA006 : 1;
30323         unsigned short ANSA005 : 1;
30324         unsigned short ANSA004 : 1;
30325         unsigned short ANSA003 : 1;
30326         unsigned short ANSA002 : 1;
30327         unsigned short ANSA001 : 1;
30328         unsigned short ANSA000 : 1;
30329 #endif
30330     } BIT;
30331     } ADANSA0;
30332     union {
30333         unsigned short WORD;
30334         struct {
30335
30336 #ifdef __RX_LITTLE_ENDIAN__
30337         unsigned short ANSA100 : 1;
```

```

30338         unsigned short ANSA101 : 1;
30339         unsigned short ANSA102 : 1;
30340         unsigned short ANSA103 : 1;
30341         unsigned short ANSA104 : 1;
30342         unsigned short : 11;
30343 #else
30344         unsigned short : 11;
30345         unsigned short ANSA104 : 1;
30346         unsigned short ANSA103 : 1;
30347         unsigned short ANSA102 : 1;
30348         unsigned short ANSA101 : 1;
30349         unsigned short ANSA100 : 1;
30350 #endif
30351     } BIT;
30352     } ADANSA1;
30353     union {
30354         unsigned short WORD;
30355         struct {
30356
30357 #ifdef __RX_LITTLE_ENDIAN__
30358         unsigned short ADS000 : 1;
30359         unsigned short ADS001 : 1;
30360         unsigned short ADS002 : 1;
30361         unsigned short ADS003 : 1;
30362         unsigned short ADS004 : 1;
30363         unsigned short ADS005 : 1;
30364         unsigned short ADS006 : 1;
30365         unsigned short ADS007 : 1;
30366         unsigned short ADS008 : 1;
30367         unsigned short ADS009 : 1;
30368         unsigned short ADS010 : 1;
30369         unsigned short ADS011 : 1;
30370         unsigned short ADS012 : 1;
30371         unsigned short ADS013 : 1;
30372         unsigned short ADS014 : 1;
30373         unsigned short ADS015 : 1;
30374 #else
30375         unsigned short ADS015 : 1;
30376         unsigned short ADS014 : 1;
30377         unsigned short ADS013 : 1;
30378         unsigned short ADS012 : 1;
30379         unsigned short ADS011 : 1;
30380         unsigned short ADS010 : 1;
30381         unsigned short ADS009 : 1;
30382         unsigned short ADS008 : 1;
30383         unsigned short ADS007 : 1;
30384         unsigned short ADS006 : 1;
30385         unsigned short ADS005 : 1;
30386         unsigned short ADS004 : 1;
30387         unsigned short ADS003 : 1;
30388         unsigned short ADS002 : 1;
30389         unsigned short ADS001 : 1;
30390         unsigned short ADS000 : 1;
30391 #endif
30392     } BIT;
30393     } ADADS0;
30394     union {
30395         unsigned short WORD;
30396         struct {
30397
30398 #ifdef __RX_LITTLE_ENDIAN__
30399         unsigned short ADS100 : 1;
30400         unsigned short ADS101 : 1;
30401         unsigned short ADS102 : 1;
30402         unsigned short ADS103 : 1;
30403         unsigned short ADS104 : 1;
30404         unsigned short : 11;
30405 #else
30406         unsigned short : 11;
30407         unsigned short ADS104 : 1;
30408         unsigned short ADS103 : 1;
30409         unsigned short ADS102 : 1;
30410         unsigned short ADS101 : 1;
30411         unsigned short ADS100 : 1;
30412 #endif
30413     } BIT;
30414     } ADADS1;
30415     union {
30416         unsigned char BYTE;
30417         struct {
30418
30419 #ifdef __RX_LITTLE_ENDIAN__
30420         unsigned char ADC : 3;
30421         unsigned char : 4;
30422         unsigned char AVEE : 1;
30423 #else
30424         unsigned char AVEE : 1;

```

```

30425         unsigned char : 4;
30426         unsigned char ADC : 3;
30427 #endif
30428     } BIT;
30429     } ADADC;
30430     char      wk1[1];
30431     union {
30432         unsigned short WORD;
30433         struct {
30434
30435 #ifdef __RX_LITTLE_ENDIAN__
30436         unsigned short : 1;
30437         unsigned short ADPRC : 2;
30438         unsigned short : 2;
30439         unsigned short ACE : 1;
30440         unsigned short : 2;
30441         unsigned short DIAGVAL : 2;
30442         unsigned short DIAGLD : 1;
30443         unsigned short DIAGM : 1;
30444         unsigned short : 3;
30445         unsigned short ADRFMT : 1;
30446 #else
30447         unsigned short ADRFMT : 1;
30448         unsigned short : 3;
30449         unsigned short DIAGM : 1;
30450         unsigned short DIAGLD : 1;
30451         unsigned short DIAGVAL : 2;
30452         unsigned short : 2;
30453         unsigned short ACE : 1;
30454         unsigned short : 2;
30455         unsigned short ADPRC : 2;
30456         unsigned short : 1;
30457 #endif
30458     } BIT;
30459     } ADCER;
30460     union {
30461         unsigned short WORD;
30462         struct {
30463
30464 #ifdef __RX_LITTLE_ENDIAN__
30465         unsigned short TRSB : 6;
30466         unsigned short : 2;
30467         unsigned short TRSA : 6;
30468         unsigned short : 2;
30469 #else
30470         unsigned short : 2;
30471         unsigned short TRSA : 6;
30472         unsigned short : 2;
30473         unsigned short TRSB : 6;
30474 #endif
30475     } BIT;
30476     } ADSTRGR;
30477     union {
30478         unsigned short WORD;
30479         struct {
30480
30481 #ifdef __RX_LITTLE_ENDIAN__
30482         unsigned short TSSAD : 1;
30483         unsigned short OCSAD : 1;
30484         unsigned short : 6;
30485         unsigned short TSSA : 1;
30486         unsigned short OCSA : 1;
30487         unsigned short TSSB : 1;
30488         unsigned short OCSB : 1;
30489         unsigned short : 1;
30490         unsigned short EXSEL : 2;
30491         unsigned short EXOEN : 1;
30492 #else
30493         unsigned short EXOEN : 1;
30494         unsigned short EXSEL : 2;
30495         unsigned short : 1;
30496         unsigned short OCSB : 1;
30497         unsigned short TSSB : 1;
30498         unsigned short OCSA : 1;
30499         unsigned short TSSA : 1;
30500         unsigned short : 6;
30501         unsigned short OCSAD : 1;
30502         unsigned short TSSAD : 1;
30503 #endif
30504     } BIT;
30505     } ADEXICR;
30506     union {
30507         unsigned short WORD;
30508         struct {
30509
30510 #ifdef __RX_LITTLE_ENDIAN__
30511         unsigned short ANSB000 : 1;

```

```

30512     unsigned short ANSB001 : 1;
30513     unsigned short ANSB002 : 1;
30514     unsigned short ANSB003 : 1;
30515     unsigned short ANSB004 : 1;
30516     unsigned short ANSB005 : 1;
30517     unsigned short ANSB006 : 1;
30518     unsigned short ANSB007 : 1;
30519     unsigned short ANSB008 : 1;
30520     unsigned short ANSB009 : 1;
30521     unsigned short ANSB010 : 1;
30522     unsigned short ANSB011 : 1;
30523     unsigned short ANSB012 : 1;
30524     unsigned short ANSB013 : 1;
30525     unsigned short ANSB014 : 1;
30526     unsigned short ANSB015 : 1;
30527 #else
30528     unsigned short ANSB015 : 1;
30529     unsigned short ANSB014 : 1;
30530     unsigned short ANSB013 : 1;
30531     unsigned short ANSB012 : 1;
30532     unsigned short ANSB011 : 1;
30533     unsigned short ANSB010 : 1;
30534     unsigned short ANSB009 : 1;
30535     unsigned short ANSB008 : 1;
30536     unsigned short ANSB007 : 1;
30537     unsigned short ANSB006 : 1;
30538     unsigned short ANSB005 : 1;
30539     unsigned short ANSB004 : 1;
30540     unsigned short ANSB003 : 1;
30541     unsigned short ANSB002 : 1;
30542     unsigned short ANSB001 : 1;
30543     unsigned short ANSB000 : 1;
30544 #endif
30545     } BIT;
30546     } ADANSB0;
30547     union {
30548         unsigned short WORD;
30549         struct {
30550
30551 #ifdef __RX_LITTLE_ENDIAN__
30552         unsigned short ANSB100 : 1;
30553         unsigned short ANSB101 : 1;
30554         unsigned short ANSB102 : 1;
30555         unsigned short ANSB103 : 1;
30556         unsigned short ANSB104 : 1;
30557         unsigned short : 11;
30558 #else
30559         unsigned short : 11;
30560         unsigned short ANSB104 : 1;
30561         unsigned short ANSB103 : 1;
30562         unsigned short ANSB102 : 1;
30563         unsigned short ANSB101 : 1;
30564         unsigned short ANSB100 : 1;
30565 #endif
30566         } BIT;
30567         } ADANSB1;
30568         unsigned short ADDBLDR;
30569         unsigned short ADTSDR;
30570         unsigned short ADOCDR;
30571         union {
30572             unsigned short WORD;
30573             union {
30574                 struct {
30575
30576 #ifdef __RX_LITTLE_ENDIAN__
30577                 unsigned short AD : 12;
30578                 unsigned short : 2;
30579                 unsigned short DIAGST : 2;
30580 #else
30581                 unsigned short DIAGST : 2;
30582                 unsigned short : 2;
30583                 unsigned short AD : 12;
30584 #endif
30585             } RIGHT;
30586             struct {
30587
30588 #ifdef __RX_LITTLE_ENDIAN__
30589                 unsigned short DIAGST : 2;
30590                 unsigned short : 2;
30591                 unsigned short AD : 12;
30592 #else
30593                 unsigned short AD : 12;
30594                 unsigned short : 2;
30595                 unsigned short DIAGST : 2;
30596 #endif
30597             } LEFT;
30598             } BIT;

```

```

30599     } ADDR;
30600     unsigned short ADDR0;
30601     unsigned short ADDR1;
30602     unsigned short ADDR2;
30603     unsigned short ADDR3;
30604     unsigned short ADDR4;
30605     unsigned short ADDR5;
30606     unsigned short ADDR6;
30607     unsigned short ADDR7;
30608     unsigned short ADDR8;
30609     unsigned short ADDR9;
30610     unsigned short ADDR10;
30611     unsigned short ADDR11;
30612     unsigned short ADDR12;
30613     unsigned short ADDR13;
30614     unsigned short ADDR14;
30615     unsigned short ADDR15;
30616     unsigned short ADDR16;
30617     unsigned short ADDR17;
30618     unsigned short ADDR18;
30619     unsigned short ADDR19;
30620     unsigned short ADDR20;
30621     char          wk2[25];
30622     union {
30623         unsigned char BYTE;
30624         struct {
30625
30626 #ifdef __RX_LITTLE_ENDIAN__
30627         unsigned char PRO : 2;
30628         unsigned char : 6;
30629 #else
30630         unsigned char : 6;
30631         unsigned char PRO : 2;
30632 #endif
30633         } BIT;
30634         } ADSAMPR;
30635     char          wk3[10];
30636     union {
30637         unsigned short WORD;
30638         struct {
30639
30640 #ifdef __RX_LITTLE_ENDIAN__
30641         unsigned short : 5;
30642         unsigned short SAM : 1;
30643         unsigned short : 10;
30644 #else
30645         unsigned short : 10;
30646         unsigned short SAM : 1;
30647         unsigned short : 5;
30648 #endif
30649         } BIT;
30650         } ADSAM;
30651     char          wk4[10];
30652     union {
30653         unsigned char BYTE;
30654         struct {
30655
30656 #ifdef __RX_LITTLE_ENDIAN__
30657         unsigned char ADNDIS : 5;
30658         unsigned char : 3;
30659 #else
30660         unsigned char : 3;
30661         unsigned char ADNDIS : 5;
30662 #endif
30663         } BIT;
30664         } ADDISCR;
30665     char          wk5[5];
30666     union {
30667         unsigned short WORD;
30668         struct {
30669
30670 #ifdef __RX_LITTLE_ENDIAN__
30671         unsigned short PGS : 1;
30672         unsigned short GBRSCN : 1;
30673         unsigned short : 12;
30674         unsigned short LGRRS : 1;
30675         unsigned short GBRP : 1;
30676 #else
30677         unsigned short GBRP : 1;
30678         unsigned short LGRRS : 1;
30679         unsigned short : 12;
30680         unsigned short GBRSCN : 1;
30681         unsigned short PGS : 1;
30682 #endif
30683         } BIT;
30684         } ADGSPCR;
30685     char          wk6[2];

```

```

30686 unsigned short ADDBLDRA;
30687 unsigned short ADDBLDRB;
30688 char wk7[4];
30689 union {
30690     unsigned char BYTE;
30691     struct {
30692
30693 #ifdef __RX_LITTLE_ENDIAN__
30694     unsigned char MONCOMB : 1;
30695     unsigned char : 3;
30696     unsigned char MONCMPA : 1;
30697     unsigned char MONCMPB : 1;
30698     unsigned char : 2;
30699 #else
30700     unsigned char : 2;
30701     unsigned char MONCMPB : 1;
30702     unsigned char MONCMPA : 1;
30703     unsigned char : 3;
30704     unsigned char MONCOMB : 1;
30705 #endif
30706     } BIT;
30707     } ADWINMON;
30708 char wk8[3];
30709 union {
30710     unsigned short WORD;
30711     struct {
30712
30713 #ifdef __RX_LITTLE_ENDIAN__
30714     unsigned short CMPAB : 2;
30715     unsigned short : 7;
30716     unsigned short CMPBE : 1;
30717     unsigned short : 1;
30718     unsigned short CMPAE : 1;
30719     unsigned short : 1;
30720     unsigned short CMPBIE : 1;
30721     unsigned short WCMPE : 1;
30722     unsigned short CMPAIE : 1;
30723 #else
30724     unsigned short CMPAIE : 1;
30725     unsigned short WCMPE : 1;
30726     unsigned short CMPBIE : 1;
30727     unsigned short : 1;
30728     unsigned short CMPAE : 1;
30729     unsigned short : 1;
30730     unsigned short CMPBE : 1;
30731     unsigned short : 7;
30732     unsigned short CMPAB : 2;
30733 #endif
30734     } BIT;
30735     } ADCMPCCR;
30736 union {
30737     unsigned char BYTE;
30738     struct {
30739
30740 #ifdef __RX_LITTLE_ENDIAN__
30741     unsigned char CMPSTS : 1;
30742     unsigned char CMPSOC : 1;
30743     unsigned char : 6;
30744 #else
30745     unsigned char : 6;
30746     unsigned char CMPSOC : 1;
30747     unsigned char CMPSTS : 1;
30748 #endif
30749     } BIT;
30750     } ADCMPANSER;
30751 union {
30752     unsigned char BYTE;
30753     struct {
30754
30755 #ifdef __RX_LITTLE_ENDIAN__
30756     unsigned char CMPLTS : 1;
30757     unsigned char CMPLOC : 1;
30758     unsigned char : 6;
30759 #else
30760     unsigned char : 6;
30761     unsigned char CMPLOC : 1;
30762     unsigned char CMPLTS : 1;
30763 #endif
30764     } BIT;
30765     } ADCMPLER;
30766 union {
30767     unsigned short WORD;
30768     struct {
30769
30770 #ifdef __RX_LITTLE_ENDIAN__
30771     unsigned short CMPCHA000 : 1;
30772     unsigned short CMPCHA001 : 1;

```

```

30773      unsigned short CMPCHA002 : 1;
30774      unsigned short CMPCHA003 : 1;
30775      unsigned short CMPCHA004 : 1;
30776      unsigned short CMPCHA005 : 1;
30777      unsigned short CMPCHA006 : 1;
30778      unsigned short CMPCHA007 : 1;
30779      unsigned short CMPCHA008 : 1;
30780      unsigned short CMPCHA009 : 1;
30781      unsigned short CMPCHA010 : 1;
30782      unsigned short CMPCHA011 : 1;
30783      unsigned short CMPCHA012 : 1;
30784      unsigned short CMPCHA013 : 1;
30785      unsigned short CMPCHA014 : 1;
30786      unsigned short CMPCHA015 : 1;
30787 #else
30788      unsigned short CMPCHA015 : 1;
30789      unsigned short CMPCHA014 : 1;
30790      unsigned short CMPCHA013 : 1;
30791      unsigned short CMPCHA012 : 1;
30792      unsigned short CMPCHA011 : 1;
30793      unsigned short CMPCHA010 : 1;
30794      unsigned short CMPCHA009 : 1;
30795      unsigned short CMPCHA008 : 1;
30796      unsigned short CMPCHA007 : 1;
30797      unsigned short CMPCHA006 : 1;
30798      unsigned short CMPCHA005 : 1;
30799      unsigned short CMPCHA004 : 1;
30800      unsigned short CMPCHA003 : 1;
30801      unsigned short CMPCHA002 : 1;
30802      unsigned short CMPCHA001 : 1;
30803      unsigned short CMPCHA000 : 1;
30804 #endif
30805     } BIT;
30806     } ADCMPANSR0;
30807     union {
30808         unsigned short WORD;
30809     struct {
30810
30811 #ifdef __RX_LITTLE_ENDIAN__
30812         unsigned short CMPCHA100 : 1;
30813         unsigned short CMPCHA101 : 1;
30814         unsigned short CMPCHA102 : 1;
30815         unsigned short CMPCHA103 : 1;
30816         unsigned short CMPCHA104 : 1;
30817         unsigned short      : 11;
30818 #else
30819         unsigned short      : 11;
30820         unsigned short CMPCHA104 : 1;
30821         unsigned short CMPCHA103 : 1;
30822         unsigned short CMPCHA102 : 1;
30823         unsigned short CMPCHA101 : 1;
30824         unsigned short CMPCHA100 : 1;
30825 #endif
30826     } BIT;
30827     } ADCMPANSR1;
30828     union {
30829         unsigned short WORD;
30830     struct {
30831
30832 #ifdef __RX_LITTLE_ENDIAN__
30833         unsigned short CMPLCHA000 : 1;
30834         unsigned short CMPLCHA001 : 1;
30835         unsigned short CMPLCHA002 : 1;
30836         unsigned short CMPLCHA003 : 1;
30837         unsigned short CMPLCHA004 : 1;
30838         unsigned short CMPLCHA005 : 1;
30839         unsigned short CMPLCHA006 : 1;
30840         unsigned short CMPLCHA007 : 1;
30841         unsigned short CMPLCHA008 : 1;
30842         unsigned short CMPLCHA009 : 1;
30843         unsigned short CMPLCHA010 : 1;
30844         unsigned short CMPLCHA011 : 1;
30845         unsigned short CMPLCHA012 : 1;
30846         unsigned short CMPLCHA013 : 1;
30847         unsigned short CMPLCHA014 : 1;
30848         unsigned short CMPLCHA015 : 1;
30849 #else
30850         unsigned short CMPLCHA015 : 1;
30851         unsigned short CMPLCHA014 : 1;
30852         unsigned short CMPLCHA013 : 1;
30853         unsigned short CMPLCHA012 : 1;
30854         unsigned short CMPLCHA011 : 1;
30855         unsigned short CMPLCHA010 : 1;
30856         unsigned short CMPLCHA009 : 1;
30857         unsigned short CMPLCHA008 : 1;
30858         unsigned short CMPLCHA007 : 1;
30859         unsigned short CMPLCHA006 : 1;

```

```

30860         unsigned short CMPLCHA005 : 1;
30861         unsigned short CMPLCHA004 : 1;
30862         unsigned short CMPLCHA003 : 1;
30863         unsigned short CMPLCHA002 : 1;
30864         unsigned short CMPLCHA001 : 1;
30865         unsigned short CMPLCHA000 : 1;
30866     #endif
30867     } BIT;
30868     } ADCMPLR0;
30869     union {
30870         unsigned short WORD;
30871         struct {
30872
30873     #ifdef __RX_LITTLE_ENDIAN__
30874         unsigned short CMPLCHA100 : 1;
30875         unsigned short CMPLCHA101 : 1;
30876         unsigned short CMPLCHA102 : 1;
30877         unsigned short CMPLCHA103 : 1;
30878         unsigned short CMPLCHA104 : 1;
30879         unsigned short : 11;
30880     #else
30881         unsigned short : 11;
30882         unsigned short CMPLCHA104 : 1;
30883         unsigned short CMPLCHA103 : 1;
30884         unsigned short CMPLCHA102 : 1;
30885         unsigned short CMPLCHA101 : 1;
30886         unsigned short CMPLCHA100 : 1;
30887     #endif
30888     } BIT;
30889     } ADCMPLR1;
30890     unsigned short ADCMPDR0;
30891     unsigned short ADCMPDR1;
30892     union {
30893         unsigned short WORD;
30894         struct {
30895
30896     #ifdef __RX_LITTLE_ENDIAN__
30897         unsigned short CMPSTCHA000 : 1;
30898         unsigned short CMPSTCHA001 : 1;
30899         unsigned short CMPSTCHA002 : 1;
30900         unsigned short CMPSTCHA003 : 1;
30901         unsigned short CMPSTCHA004 : 1;
30902         unsigned short CMPSTCHA005 : 1;
30903         unsigned short CMPSTCHA006 : 1;
30904         unsigned short CMPSTCHA007 : 1;
30905         unsigned short CMPSTCHA008 : 1;
30906         unsigned short CMPSTCHA009 : 1;
30907         unsigned short CMPSTCHA010 : 1;
30908         unsigned short CMPSTCHA011 : 1;
30909         unsigned short CMPSTCHA012 : 1;
30910         unsigned short CMPSTCHA013 : 1;
30911         unsigned short CMPSTCHA014 : 1;
30912         unsigned short CMPSTCHA015 : 1;
30913     #else
30914         unsigned short CMPSTCHA015 : 1;
30915         unsigned short CMPSTCHA014 : 1;
30916         unsigned short CMPSTCHA013 : 1;
30917         unsigned short CMPSTCHA012 : 1;
30918         unsigned short CMPSTCHA011 : 1;
30919         unsigned short CMPSTCHA010 : 1;
30920         unsigned short CMPSTCHA009 : 1;
30921         unsigned short CMPSTCHA008 : 1;
30922         unsigned short CMPSTCHA007 : 1;
30923         unsigned short CMPSTCHA006 : 1;
30924         unsigned short CMPSTCHA005 : 1;
30925         unsigned short CMPSTCHA004 : 1;
30926         unsigned short CMPSTCHA003 : 1;
30927         unsigned short CMPSTCHA002 : 1;
30928         unsigned short CMPSTCHA001 : 1;
30929         unsigned short CMPSTCHA000 : 1;
30930     #endif
30931     } BIT;
30932     } ADCMPDR0;
30933     union {
30934         unsigned short WORD;
30935         struct {
30936
30937     #ifdef __RX_LITTLE_ENDIAN__
30938         unsigned short CMPSTCHA100 : 1;
30939         unsigned short CMPSTCHA101 : 1;
30940         unsigned short CMPSTCHA102 : 1;
30941         unsigned short CMPSTCHA103 : 1;
30942         unsigned short CMPSTCHA104 : 1;
30943         unsigned short : 11;
30944     #else
30945         unsigned short : 11;
30946         unsigned short CMPSTCHA104 : 1;

```

```

30947         unsigned short CMPSTCHA103 : 1;
30948         unsigned short CMPSTCHA102 : 1;
30949         unsigned short CMPSTCHA101 : 1;
30950         unsigned short CMPSTCHA100 : 1;
30951     #endif
30952     } BIT;
30953     } ADCMPSTR1;
30954     union {
30955         unsigned char BYTE;
30956         struct {
30957
30958     #ifdef __RX_LITTLE_ENDIAN__
30959         unsigned char CMPFTS : 1;
30960         unsigned char CMPFOC : 1;
30961         unsigned char : 6;
30962     #else
30963         unsigned char : 6;
30964         unsigned char CMPFOC : 1;
30965         unsigned char CMPFTS : 1;
30966     #endif
30967     } BIT;
30968     } ADCMPSESR;
30969     char wk9[1];
30970     union {
30971         unsigned char BYTE;
30972         struct {
30973
30974     #ifdef __RX_LITTLE_ENDIAN__
30975         unsigned char CMPCHB : 6;
30976         unsigned char : 1;
30977         unsigned char CMPLB : 1;
30978     #else
30979         unsigned char CMPLB : 1;
30980         unsigned char : 1;
30981         unsigned char CMPCHB : 6;
30982     #endif
30983     } BIT;
30984     } ADCMPBNSR;
30985     char wk10[1];
30986     unsigned short ADWINLLB;
30987     unsigned short ADWINULB;
30988     union {
30989         unsigned char BYTE;
30990         struct {
30991
30992     #ifdef __RX_LITTLE_ENDIAN__
30993         unsigned char CMPSTB : 1;
30994         unsigned char : 7;
30995     #else
30996         unsigned char : 7;
30997         unsigned char CMPSTB : 1;
30998     #endif
30999     } BIT;
31000     } ADCMPBSR;
31001     char wk11[39];
31002     union {
31003         unsigned short WORD;
31004         struct {
31005
31006     #ifdef __RX_LITTLE_ENDIAN__
31007         unsigned short ANSC000 : 1;
31008         unsigned short ANSC001 : 1;
31009         unsigned short ANSC002 : 1;
31010         unsigned short ANSC003 : 1;
31011         unsigned short ANSC004 : 1;
31012         unsigned short ANSC005 : 1;
31013         unsigned short ANSC006 : 1;
31014         unsigned short ANSC007 : 1;
31015         unsigned short ANSC008 : 1;
31016         unsigned short ANSC009 : 1;
31017         unsigned short ANSC010 : 1;
31018         unsigned short ANSC011 : 1;
31019         unsigned short ANSC012 : 1;
31020         unsigned short ANSC013 : 1;
31021         unsigned short ANSC014 : 1;
31022         unsigned short ANSC015 : 1;
31023     #else
31024         unsigned short ANSC015 : 1;
31025         unsigned short ANSC014 : 1;
31026         unsigned short ANSC013 : 1;
31027         unsigned short ANSC012 : 1;
31028         unsigned short ANSC011 : 1;
31029         unsigned short ANSC010 : 1;
31030         unsigned short ANSC009 : 1;
31031         unsigned short ANSC008 : 1;
31032         unsigned short ANSC007 : 1;
31033         unsigned short ANSC006 : 1;

```

```

31034         unsigned short ANSC005 : 1;
31035         unsigned short ANSC004 : 1;
31036         unsigned short ANSC003 : 1;
31037         unsigned short ANSC002 : 1;
31038         unsigned short ANSC001 : 1;
31039         unsigned short ANSC000 : 1;
31040     #endif
31041     } BIT;
31042     } ADANSC0;
31043     union {
31044         unsigned short WORD;
31045         struct {
31046
31047     #ifdef __RX_LITTLE_ENDIAN__
31048         unsigned short ANSC100 : 1;
31049         unsigned short ANSC101 : 1;
31050         unsigned short ANSC102 : 1;
31051         unsigned short ANSC103 : 1;
31052         unsigned short ANSC104 : 1;
31053         unsigned short : 11;
31054     #else
31055         unsigned short : 11;
31056         unsigned short ANSC104 : 1;
31057         unsigned short ANSC103 : 1;
31058         unsigned short ANSC102 : 1;
31059         unsigned short ANSC101 : 1;
31060         unsigned short ANSC100 : 1;
31061     #endif
31062     } BIT;
31063     } ADANSC1;
31064     union {
31065         unsigned char BYTE;
31066         struct {
31067
31068     #ifdef __RX_LITTLE_ENDIAN__
31069         unsigned char TSSC : 1;
31070         unsigned char OCSC : 1;
31071         unsigned char : 6;
31072     #else
31073         unsigned char : 6;
31074         unsigned char OCSC : 1;
31075         unsigned char TSSC : 1;
31076     #endif
31077     } BIT;
31078     } ADGCEXCR;
31079     union {
31080         unsigned char BYTE;
31081         struct {
31082
31083     #ifdef __RX_LITTLE_ENDIAN__
31084         unsigned char TRSC : 6;
31085         unsigned char GCADIE : 1;
31086         unsigned char GRCE : 1;
31087     #else
31088         unsigned char GRCE : 1;
31089         unsigned char GCADIE : 1;
31090         unsigned char TRSC : 6;
31091     #endif
31092     } BIT;
31093     } ADGCTRGR;
31094     char      wk12[3];
31095     unsigned char ADSSTRL;
31096     unsigned char ADSSTRT;
31097     unsigned char ADSSTRO;
31098     unsigned char ADSSTR0;
31099     unsigned char ADSSTR1;
31100     unsigned char ADSSTR2;
31101     unsigned char ADSSTR3;
31102     unsigned char ADSSTR4;
31103     unsigned char ADSSTR5;
31104     unsigned char ADSSTR6;
31105     unsigned char ADSSTR7;
31106     unsigned char ADSSTR8;
31107     unsigned char ADSSTR9;
31108     unsigned char ADSSTR10;
31109     unsigned char ADSSTR11;
31110     unsigned char ADSSTR12;
31111     unsigned char ADSSTR13;
31112     unsigned char ADSSTR14;
31113     unsigned char ADSSTR15;
31114 } st_s12ad1_t;
31115
31116 typedef struct st_sci0 {
31117     union {
31118         unsigned char BYTE;
31119         struct {
31120

```

```

31121 #ifndef __RX_LITTLE_ENDIAN__
31122     unsigned char CKS : 2;
31123     unsigned char MP : 1;
31124     unsigned char STOP : 1;
31125     unsigned char PM : 1;
31126     unsigned char PE : 1;
31127     unsigned char CHR : 1;
31128     unsigned char CM : 1;
31129 #else
31130     unsigned char CM : 1;
31131     unsigned char CHR : 1;
31132     unsigned char PE : 1;
31133     unsigned char PM : 1;
31134     unsigned char STOP : 1;
31135     unsigned char MP : 1;
31136     unsigned char CKS : 2;
31137 #endif
31138 } BIT;
31139 } SMR;
31140 unsigned char BRR;
31141 union {
31142     unsigned char BYTE;
31143     struct {
31144
31145 #ifndef __RX_LITTLE_ENDIAN__
31146     unsigned char CKE : 2;
31147     unsigned char TEIE : 1;
31148     unsigned char MPIE : 1;
31149     unsigned char RE : 1;
31150     unsigned char TE : 1;
31151     unsigned char RIE : 1;
31152     unsigned char TIE : 1;
31153 #else
31154     unsigned char TIE : 1;
31155     unsigned char RIE : 1;
31156     unsigned char TE : 1;
31157     unsigned char RE : 1;
31158     unsigned char MPIE : 1;
31159     unsigned char TEIE : 1;
31160     unsigned char CKE : 2;
31161 #endif
31162     } BIT;
31163     } SCR;
31164     unsigned char TDR;
31165     union {
31166         unsigned char BYTE;
31167         struct {
31168
31169 #ifndef __RX_LITTLE_ENDIAN__
31170         unsigned char MPBT : 1;
31171         unsigned char MPB : 1;
31172         unsigned char TEND : 1;
31173         unsigned char PER : 1;
31174         unsigned char FER : 1;
31175         unsigned char ORER : 1;
31176         unsigned char RDRF : 1;
31177         unsigned char TDRE : 1;
31178 #else
31179         unsigned char TDRE : 1;
31180         unsigned char RDRF : 1;
31181         unsigned char ORER : 1;
31182         unsigned char FER : 1;
31183         unsigned char PER : 1;
31184         unsigned char TEND : 1;
31185         unsigned char MPB : 1;
31186         unsigned char MPBT : 1;
31187 #endif
31188         } BIT;
31189         } SSR;
31190     unsigned char RDR;
31191     union {
31192         unsigned char BYTE;
31193         struct {
31194
31195 #ifndef __RX_LITTLE_ENDIAN__
31196         unsigned char SMIF : 1;
31197         unsigned char : 1;
31198         unsigned char SINV : 1;
31199         unsigned char SDIR : 1;
31200         unsigned char CHR1 : 1;
31201         unsigned char : 2;
31202         unsigned char BCP2 : 1;
31203 #else
31204         unsigned char BCP2 : 1;
31205         unsigned char : 2;
31206         unsigned char CHR1 : 1;
31207         unsigned char SDIR : 1;

```

```
31208         unsigned char SINV : 1;
31209         unsigned char : 1;
31210         unsigned char SMIF : 1;
31211     #endif
31212     } BIT;
31213     } SCMR;
31214     union {
31215         unsigned char BYTE;
31216         struct {
31217
31218     #ifdef __RX_LITTLE_ENDIAN__
31219         unsigned char ACS0 : 1;
31220         unsigned char : 1;
31221         unsigned char BRME : 1;
31222         unsigned char ABCSE : 1;
31223         unsigned char ABCS : 1;
31224         unsigned char NFEN : 1;
31225         unsigned char BGDM : 1;
31226         unsigned char RXDESEL : 1;
31227     #else
31228         unsigned char RXDESEL : 1;
31229         unsigned char BGDM : 1;
31230         unsigned char NFEN : 1;
31231         unsigned char ABCS : 1;
31232         unsigned char ABCSE : 1;
31233         unsigned char BRME : 1;
31234         unsigned char : 1;
31235         unsigned char ACS0 : 1;
31236     #endif
31237     } BIT;
31238     } SEMR;
31239     union {
31240         unsigned char BYTE;
31241         struct {
31242
31243     #ifdef __RX_LITTLE_ENDIAN__
31244         unsigned char NFCS : 3;
31245         unsigned char : 5;
31246     #else
31247         unsigned char : 5;
31248         unsigned char NFCS : 3;
31249     #endif
31250     } BIT;
31251     } SNFR;
31252     union {
31253         unsigned char BYTE;
31254         struct {
31255
31256     #ifdef __RX_LITTLE_ENDIAN__
31257         unsigned char IICM : 1;
31258         unsigned char : 2;
31259         unsigned char IICDL : 5;
31260     #else
31261         unsigned char IICDL : 5;
31262         unsigned char : 2;
31263         unsigned char IICM : 1;
31264     #endif
31265     } BIT;
31266     } SIMR1;
31267     union {
31268         unsigned char BYTE;
31269         struct {
31270
31271     #ifdef __RX_LITTLE_ENDIAN__
31272         unsigned char IICINTM : 1;
31273         unsigned char IICCSC : 1;
31274         unsigned char : 3;
31275         unsigned char IICACKT : 1;
31276         unsigned char : 2;
31277     #else
31278         unsigned char : 2;
31279         unsigned char IICACKT : 1;
31280         unsigned char : 3;
31281         unsigned char IICCSC : 1;
31282         unsigned char IICINTM : 1;
31283     #endif
31284     } BIT;
31285     } SIMR2;
31286     union {
31287         unsigned char BYTE;
31288         struct {
31289
31290     #ifdef __RX_LITTLE_ENDIAN__
31291         unsigned char IICSTAREQ : 1;
31292         unsigned char IICRSTAREQ : 1;
31293         unsigned char IICSTPREQ : 1;
31294         unsigned char IICSTIF : 1;
```

```

31295         unsigned char IICSDAS : 2;
31296         unsigned char IICSCLS : 2;
31297     #else
31298         unsigned char IICSCLS : 2;
31299         unsigned char IICSDAS : 2;
31300         unsigned char IICSTIF : 1;
31301         unsigned char IICSTPREQ : 1;
31302         unsigned char IICRSTAREQ : 1;
31303         unsigned char IICSTAREQ : 1;
31304     #endif
31305     } BIT;
31306     } SIMR3;
31307     union {
31308         unsigned char BYTE;
31309         struct {
31310
31311         #ifdef __RX_LITTLE_ENDIAN__
31312             unsigned char IICACKR : 1;
31313             unsigned char : 7;
31314         #else
31315             unsigned char : 7;
31316             unsigned char IICACKR : 1;
31317         #endif
31318         } BIT;
31319         } SISR;
31320     union {
31321         unsigned char BYTE;
31322         struct {
31323
31324         #ifdef __RX_LITTLE_ENDIAN__
31325             unsigned char SSE : 1;
31326             unsigned char CTSE : 1;
31327             unsigned char MSS : 1;
31328             unsigned char : 1;
31329             unsigned char MFF : 1;
31330             unsigned char : 1;
31331             unsigned char CKPOL : 1;
31332             unsigned char CKPH : 1;
31333         #else
31334             unsigned char CKPH : 1;
31335             unsigned char CKPOL : 1;
31336             unsigned char : 1;
31337             unsigned char MFF : 1;
31338             unsigned char : 1;
31339             unsigned char MSS : 1;
31340             unsigned char CTSE : 1;
31341             unsigned char SSE : 1;
31342         #endif
31343         } BIT;
31344         } SPMR;
31345     union {
31346         unsigned short WORD;
31347         struct {
31348             unsigned char TDRH;
31349             unsigned char TDRL;
31350         } BYTE;
31351     } TDRHL;
31352     union {
31353         unsigned short WORD;
31354         struct {
31355             unsigned char RDRH;
31356             unsigned char RDRL;
31357         } BYTE;
31358     } RDRHL;
31359     unsigned char MDDR;
31360     union {
31361         unsigned char BYTE;
31362         struct {
31363
31364         #ifdef __RX_LITTLE_ENDIAN__
31365             unsigned char DCMF : 1;
31366             unsigned char : 2;
31367             unsigned char DPER : 1;
31368             unsigned char DFER : 1;
31369             unsigned char : 1;
31370             unsigned char IDSEL : 1;
31371             unsigned char DCME : 1;
31372         #else
31373             unsigned char DCME : 1;
31374             unsigned char IDSEL : 1;
31375             unsigned char : 1;
31376             unsigned char DFER : 1;
31377             unsigned char DPER : 1;
31378             unsigned char : 2;
31379             unsigned char DCMF : 1;
31380         #endif
31381         } BIT;

```

```

31382     } DCCR;
31383     char          wk0[6];
31384     union {
31385         unsigned short WORD;
31386         struct {
31387             unsigned char H;
31388             unsigned char L;
31389         } BYTE;
31390     } struct {
31391
31392 #ifdef __RX_LITTLE_ENDIAN__
31393         unsigned short CMPD : 9;
31394         unsigned short : 7;
31395 #else
31396         unsigned short : 7;
31397         unsigned short CMPD : 9;
31398 #endif
31399     } BIT;
31400     } CDR;
31401     union {
31402         unsigned char BYTE;
31403     } struct {
31404
31405 #ifdef __RX_LITTLE_ENDIAN__
31406         unsigned char RXDMON : 1;
31407         unsigned char SPB2DT : 1;
31408         unsigned char SPB2IO : 1;
31409         unsigned char : 5;
31410 #else
31411         unsigned char : 5;
31412         unsigned char SPB2IO : 1;
31413         unsigned char SPB2DT : 1;
31414         unsigned char RXDMON : 1;
31415 #endif
31416     } BIT;
31417     } SPTR;
31418 } st_sci0_t;
31419
31420 typedef struct st_sci7 {
31421     union {
31422         unsigned char BYTE;
31423     } struct {
31424
31425 #ifdef __RX_LITTLE_ENDIAN__
31426         unsigned char CKS : 2;
31427         unsigned char MP : 1;
31428         unsigned char STOP : 1;
31429         unsigned char PM : 1;
31430         unsigned char PE : 1;
31431         unsigned char CHR : 1;
31432         unsigned char CM : 1;
31433 #else
31434         unsigned char CM : 1;
31435         unsigned char CHR : 1;
31436         unsigned char PE : 1;
31437         unsigned char PM : 1;
31438         unsigned char STOP : 1;
31439         unsigned char MP : 1;
31440         unsigned char CKS : 2;
31441 #endif
31442     } BIT;
31443     } SMR;
31444     unsigned char BRR;
31445     union {
31446         unsigned char BYTE;
31447     } struct {
31448
31449 #ifdef __RX_LITTLE_ENDIAN__
31450         unsigned char CKE : 2;
31451         unsigned char TEIE : 1;
31452         unsigned char MPIE : 1;
31453         unsigned char RE : 1;
31454         unsigned char TE : 1;
31455         unsigned char RIE : 1;
31456         unsigned char TIE : 1;
31457 #else
31458         unsigned char TIE : 1;
31459         unsigned char RIE : 1;
31460         unsigned char TE : 1;
31461         unsigned char RE : 1;
31462         unsigned char MPIE : 1;
31463         unsigned char TEIE : 1;
31464         unsigned char CKE : 2;
31465 #endif
31466     } BIT;
31467     } SCR;
31468     unsigned char TDR;

```

```

31469     union {
31470         union {
31471             unsigned char BYTE;
31472         struct {
31473
31474 #ifdef __RX_LITTLE_ENDIAN__
31475             unsigned char MPBT : 1;
31476             unsigned char MPB : 1;
31477             unsigned char TEND : 1;
31478             unsigned char PER : 1;
31479             unsigned char FER : 1;
31480             unsigned char ORER : 1;
31481             unsigned char RDRF : 1;
31482             unsigned char TDRE : 1;
31483 #else
31484             unsigned char TDRE : 1;
31485             unsigned char RDRF : 1;
31486             unsigned char ORER : 1;
31487             unsigned char FER : 1;
31488             unsigned char PER : 1;
31489             unsigned char TEND : 1;
31490             unsigned char MPB : 1;
31491             unsigned char MPBT : 1;
31492 #endif
31493         } BIT;
31494     } SSR;
31495     union {
31496         unsigned char BYTE;
31497     struct {
31498
31499 #ifdef __RX_LITTLE_ENDIAN__
31500         unsigned char DR : 1;
31501         unsigned char : 1;
31502         unsigned char TEND : 1;
31503         unsigned char PER : 1;
31504         unsigned char FER : 1;
31505         unsigned char ORER : 1;
31506         unsigned char RDF : 1;
31507         unsigned char TDFE : 1;
31508 #else
31509         unsigned char TDFE : 1;
31510         unsigned char RDF : 1;
31511         unsigned char ORER : 1;
31512         unsigned char FER : 1;
31513         unsigned char PER : 1;
31514         unsigned char TEND : 1;
31515         unsigned char : 1;
31516         unsigned char DR : 1;
31517 #endif
31518     } BIT;
31519     } SSRFIFO;
31520 };
31521 unsigned char RDR;
31522 union {
31523     unsigned char BYTE;
31524 struct {
31525
31526 #ifdef __RX_LITTLE_ENDIAN__
31527     unsigned char SMIF : 1;
31528     unsigned char : 1;
31529     unsigned char SINV : 1;
31530     unsigned char SDIR : 1;
31531     unsigned char CHR1 : 1;
31532     unsigned char : 2;
31533     unsigned char BCP2 : 1;
31534 #else
31535     unsigned char BCP2 : 1;
31536     unsigned char : 2;
31537     unsigned char CHR1 : 1;
31538     unsigned char SDIR : 1;
31539     unsigned char SINV : 1;
31540     unsigned char : 1;
31541     unsigned char SMIF : 1;
31542 #endif
31543 } BIT;
31544 } SCMR;
31545 union {
31546     unsigned char BYTE;
31547 struct {
31548
31549 #ifdef __RX_LITTLE_ENDIAN__
31550     unsigned char ACS0 : 1;
31551     unsigned char : 1;
31552     unsigned char BRME : 1;
31553     unsigned char ABCSE : 1;
31554     unsigned char ABCS : 1;
31555     unsigned char NFEN : 1;

```

```

31556         unsigned char BGDM : 1;
31557         unsigned char RXDESEL : 1;
31558     #else
31559         unsigned char RXDESEL : 1;
31560         unsigned char BGDM : 1;
31561         unsigned char NFEN : 1;
31562         unsigned char ABCS : 1;
31563         unsigned char ABCSE : 1;
31564         unsigned char BRME : 1;
31565         unsigned char : 1;
31566         unsigned char ACS0 : 1;
31567     #endif
31568     } BIT;
31569     } SEMR;
31570     union {
31571         unsigned char BYTE;
31572         struct {
31573
31574     #ifdef __RX_LITTLE_ENDIAN__
31575         unsigned char NFCS : 3;
31576         unsigned char : 5;
31577     #else
31578         unsigned char : 5;
31579         unsigned char NFCS : 3;
31580     #endif
31581     } BIT;
31582     } SNFR;
31583     union {
31584         unsigned char BYTE;
31585         struct {
31586
31587     #ifdef __RX_LITTLE_ENDIAN__
31588         unsigned char IICM : 1;
31589         unsigned char : 2;
31590         unsigned char IICDL : 5;
31591     #else
31592         unsigned char IICDL : 5;
31593         unsigned char : 2;
31594         unsigned char IICM : 1;
31595     #endif
31596     } BIT;
31597     } SIMR1;
31598     union {
31599         unsigned char BYTE;
31600         struct {
31601
31602     #ifdef __RX_LITTLE_ENDIAN__
31603         unsigned char IICINTM : 1;
31604         unsigned char IICCSC : 1;
31605         unsigned char : 3;
31606         unsigned char IICACKT : 1;
31607         unsigned char : 2;
31608     #else
31609         unsigned char : 2;
31610         unsigned char IICACKT : 1;
31611         unsigned char : 3;
31612         unsigned char IICCSC : 1;
31613         unsigned char IICINTM : 1;
31614     #endif
31615     } BIT;
31616     } SIMR2;
31617     union {
31618         unsigned char BYTE;
31619         struct {
31620
31621     #ifdef __RX_LITTLE_ENDIAN__
31622         unsigned char IICSTAREQ : 1;
31623         unsigned char IICRSTAREQ : 1;
31624         unsigned char IICSTPREQ : 1;
31625         unsigned char IICSTIF : 1;
31626         unsigned char IICSDAS : 2;
31627         unsigned char IICSCLS : 2;
31628     #else
31629         unsigned char IICSCLS : 2;
31630         unsigned char IICSDAS : 2;
31631         unsigned char IICSTIF : 1;
31632         unsigned char IICSTPREQ : 1;
31633         unsigned char IICRSTAREQ : 1;
31634         unsigned char IICSTAREQ : 1;
31635     #endif
31636     } BIT;
31637     } SIMR3;
31638     union {
31639         unsigned char BYTE;
31640         struct {
31641
31642     #ifdef __RX_LITTLE_ENDIAN__

```

```

31643         unsigned char IICACKR : 1;
31644         unsigned char   : 7;
31645 #else
31646         unsigned char   : 7;
31647         unsigned char IICACKR : 1;
31648 #endif
31649     } BIT;
31650     } SISR;
31651     union {
31652         unsigned char BYTE;
31653         struct {
31654
31655 #ifdef __RX_LITTLE_ENDIAN__
31656         unsigned char SSE : 1;
31657         unsigned char CTSE : 1;
31658         unsigned char MSS : 1;
31659         unsigned char   : 1;
31660         unsigned char MFF : 1;
31661         unsigned char   : 1;
31662         unsigned char CKPOL : 1;
31663         unsigned char CKPH : 1;
31664 #else
31665         unsigned char CKPH : 1;
31666         unsigned char CKPOL : 1;
31667         unsigned char   : 1;
31668         unsigned char MFF : 1;
31669         unsigned char   : 1;
31670         unsigned char MSS : 1;
31671         unsigned char CTSE : 1;
31672         unsigned char SSE : 1;
31673 #endif
31674     } BIT;
31675     } SPMR;
31676     union {
31677         union {
31678             unsigned short WORD;
31679             struct {
31680                 unsigned char TDRH;
31681                 unsigned char TDRL;
31682             } BYTE;
31683         } TDRHL;
31684         union {
31685             unsigned short WORD;
31686             struct {
31687                 unsigned char H;
31688                 unsigned char L;
31689             } BYTE;
31690             struct {
31691
31692 #ifdef __RX_LITTLE_ENDIAN__
31693             unsigned short TDAT : 9;
31694             unsigned short MPBT : 1;
31695             unsigned short   : 6;
31696 #else
31697             unsigned short   : 6;
31698             unsigned short MPBT : 1;
31699             unsigned short TDAT : 9;
31700 #endif
31701         } BIT;
31702         } FTDR;
31703     };
31704     union {
31705         union {
31706             unsigned short WORD;
31707             struct {
31708                 unsigned char RDRH;
31709                 unsigned char RDRL;
31710             } BYTE;
31711         } RDRHL;
31712         union {
31713             unsigned short WORD;
31714             struct {
31715                 unsigned char H;
31716                 unsigned char L;
31717             } BYTE;
31718             struct {
31719
31720 #ifdef __RX_LITTLE_ENDIAN__
31721             unsigned short RDAT : 9;
31722             unsigned short MPB : 1;
31723             unsigned short DR : 1;
31724             unsigned short PER : 1;
31725             unsigned short FER : 1;
31726             unsigned short ORER : 1;
31727             unsigned short RDF : 1;
31728             unsigned short   : 1;
31729 #else

```

```

31730         unsigned short : 1;
31731         unsigned short RDF : 1;
31732         unsigned short ORER : 1;
31733         unsigned short FER : 1;
31734         unsigned short PER : 1;
31735         unsigned short DR : 1;
31736         unsigned short MPB : 1;
31737         unsigned short RDAT : 9;
31738 #endif
31739     } BIT;
31740     } FRDR;
31741 };
31742 unsigned char MDDR;
31743 union {
31744     unsigned char BYTE;
31745     struct {
31746
31747 #ifdef __RX_LITTLE_ENDIAN__
31748         unsigned char DCMF : 1;
31749         unsigned char : 2;
31750         unsigned char DPER : 1;
31751         unsigned char DFER : 1;
31752         unsigned char : 1;
31753         unsigned char IDSEL : 1;
31754         unsigned char DCME : 1;
31755 #else
31756         unsigned char DCME : 1;
31757         unsigned char IDSEL : 1;
31758         unsigned char : 1;
31759         unsigned char DFER : 1;
31760         unsigned char DPER : 1;
31761         unsigned char : 2;
31762         unsigned char DCMF : 1;
31763 #endif
31764     } BIT;
31765     } DCCR;
31766     union {
31767         unsigned short WORD;
31768         struct {
31769             unsigned char H;
31770             unsigned char L;
31771         } BYTE;
31772     } struct {
31773
31774 #ifdef __RX_LITTLE_ENDIAN__
31775         unsigned short FM : 1;
31776         unsigned short RFRST : 1;
31777         unsigned short TFRST : 1;
31778         unsigned short DRES : 1;
31779         unsigned short TTRG : 4;
31780         unsigned short RTRG : 4;
31781         unsigned short RSTRG : 4;
31782 #else
31783         unsigned short RSTRG : 4;
31784         unsigned short RTRG : 4;
31785         unsigned short TTRG : 4;
31786         unsigned short DRES : 1;
31787         unsigned short TFRST : 1;
31788         unsigned short RFRST : 1;
31789         unsigned short FM : 1;
31790 #endif
31791     } BIT;
31792     } FCR;
31793     union {
31794         unsigned short WORD;
31795         struct {
31796             unsigned char H;
31797             unsigned char L;
31798         } BYTE;
31799     } struct {
31800
31801 #ifdef __RX_LITTLE_ENDIAN__
31802         unsigned short R : 5;
31803         unsigned short : 3;
31804         unsigned short T : 5;
31805         unsigned short : 3;
31806 #else
31807         unsigned short : 3;
31808         unsigned short T : 5;
31809         unsigned short : 3;
31810         unsigned short R : 5;
31811 #endif
31812     } BIT;
31813     } FDR;
31814     union {
31815         unsigned short WORD;
31816         struct {

```

```

31817         unsigned char H;
31818         unsigned char L;
31819     } BYTE;
31820     struct {
31821
31822 #ifdef __RX_LITTLE_ENDIAN__
31823         unsigned short ORER : 1;
31824         unsigned short : 1;
31825         unsigned short FNUM : 5;
31826         unsigned short : 1;
31827         unsigned short PNUM : 5;
31828         unsigned short : 3;
31829 #else
31830         unsigned short : 3;
31831         unsigned short PNUM : 5;
31832         unsigned short : 1;
31833         unsigned short FNUM : 5;
31834         unsigned short : 1;
31835         unsigned short ORER : 1;
31836 #endif
31837     } BIT;
31838     } LSR;
31839     union {
31840         unsigned short WORD;
31841         struct {
31842             unsigned char H;
31843             unsigned char L;
31844         } BYTE;
31845     } struct {
31846
31847 #ifdef __RX_LITTLE_ENDIAN__
31848         unsigned short CMPD : 9;
31849         unsigned short : 7;
31850 #else
31851         unsigned short : 7;
31852         unsigned short CMPD : 9;
31853 #endif
31854     } BIT;
31855     } CDR;
31856     union {
31857         unsigned char BYTE;
31858     } struct {
31859
31860 #ifdef __RX_LITTLE_ENDIAN__
31861         unsigned char RXDMON : 1;
31862         unsigned char SPB2DT : 1;
31863         unsigned char SPB2IO : 1;
31864         unsigned char : 5;
31865 #else
31866         unsigned char : 5;
31867         unsigned char SPB2IO : 1;
31868         unsigned char SPB2DT : 1;
31869         unsigned char RXDMON : 1;
31870 #endif
31871     } BIT;
31872     } SPTR;
31873 } st_sci7_t;
31874
31875 typedef struct st_sci12 {
31876     union {
31877         unsigned char BYTE;
31878     } struct {
31879
31880 #ifdef __RX_LITTLE_ENDIAN__
31881         unsigned char CKS : 2;
31882         unsigned char MP : 1;
31883         unsigned char STOP : 1;
31884         unsigned char PM : 1;
31885         unsigned char PE : 1;
31886         unsigned char CHR : 1;
31887         unsigned char CM : 1;
31888 #else
31889         unsigned char CM : 1;
31890         unsigned char CHR : 1;
31891         unsigned char PE : 1;
31892         unsigned char PM : 1;
31893         unsigned char STOP : 1;
31894         unsigned char MP : 1;
31895         unsigned char CKS : 2;
31896 #endif
31897     } BIT;
31898     } SMR;
31899     unsigned char BRR;
31900     union {
31901         unsigned char BYTE;
31902     } struct {
31903

```

```

31904 #ifdef __RX_LITTLE_ENDIAN__
31905     unsigned char CKE : 2;
31906     unsigned char TEIE : 1;
31907     unsigned char MPIE : 1;
31908     unsigned char RE : 1;
31909     unsigned char TE : 1;
31910     unsigned char RIE : 1;
31911     unsigned char TIE : 1;
31912 #else
31913     unsigned char TIE : 1;
31914     unsigned char RIE : 1;
31915     unsigned char TE : 1;
31916     unsigned char RE : 1;
31917     unsigned char MPIE : 1;
31918     unsigned char TEIE : 1;
31919     unsigned char CKE : 2;
31920 #endif
31921     } BIT;
31922     } SCR;
31923     unsigned char TDR;
31924     union {
31925         unsigned char BYTE;
31926         struct {
31927
31928 #ifdef __RX_LITTLE_ENDIAN__
31929         unsigned char MPBT : 1;
31930         unsigned char MPB : 1;
31931         unsigned char TEND : 1;
31932         unsigned char PER : 1;
31933         unsigned char FER : 1;
31934         unsigned char ORER : 1;
31935         unsigned char RDRF : 1;
31936         unsigned char TDRE : 1;
31937 #else
31938         unsigned char TDRE : 1;
31939         unsigned char RDRF : 1;
31940         unsigned char ORER : 1;
31941         unsigned char FER : 1;
31942         unsigned char PER : 1;
31943         unsigned char TEND : 1;
31944         unsigned char MPB : 1;
31945         unsigned char MPBT : 1;
31946 #endif
31947         } BIT;
31948         } SSR;
31949         unsigned char RDR;
31950         union {
31951             unsigned char BYTE;
31952             struct {
31953
31954 #ifdef __RX_LITTLE_ENDIAN__
31955             unsigned char SMIF : 1;
31956             unsigned char : 1;
31957             unsigned char SINV : 1;
31958             unsigned char SDIR : 1;
31959             unsigned char CHR1 : 1;
31960             unsigned char : 2;
31961             unsigned char BCP2 : 1;
31962 #else
31963             unsigned char BCP2 : 1;
31964             unsigned char : 2;
31965             unsigned char CHR1 : 1;
31966             unsigned char SDIR : 1;
31967             unsigned char SINV : 1;
31968             unsigned char : 1;
31969             unsigned char SMIF : 1;
31970 #endif
31971             } BIT;
31972             } SCMR;
31973             union {
31974                 unsigned char BYTE;
31975                 struct {
31976
31977 #ifdef __RX_LITTLE_ENDIAN__
31978                 unsigned char ACS0 : 1;
31979                 unsigned char : 1;
31980                 unsigned char BRME : 1;
31981                 unsigned char : 1;
31982                 unsigned char ABCS : 1;
31983                 unsigned char NFEN : 1;
31984                 unsigned char BGDM : 1;
31985                 unsigned char RXDESEL : 1;
31986 #else
31987                 unsigned char RXDESEL : 1;
31988                 unsigned char BGDM : 1;
31989                 unsigned char NFEN : 1;
31990                 unsigned char ABCS : 1;

```

```
31991         unsigned char : 1;
31992         unsigned char BRME : 1;
31993         unsigned char : 1;
31994         unsigned char ACS0 : 1;
31995 #endif
31996     } BIT;
31997     } SEMR;
31998     union {
31999         unsigned char BYTE;
32000     struct {
32001
32002 #ifdef __RX_LITTLE_ENDIAN__
32003         unsigned char NFCS : 3;
32004         unsigned char : 5;
32005 #else
32006         unsigned char : 5;
32007         unsigned char NFCS : 3;
32008 #endif
32009     } BIT;
32010     } SNFR;
32011     union {
32012         unsigned char BYTE;
32013     struct {
32014
32015 #ifdef __RX_LITTLE_ENDIAN__
32016         unsigned char IICM : 1;
32017         unsigned char : 2;
32018         unsigned char IICDL : 5;
32019 #else
32020         unsigned char IICDL : 5;
32021         unsigned char : 2;
32022         unsigned char IICM : 1;
32023 #endif
32024     } BIT;
32025     } SIMR1;
32026     union {
32027         unsigned char BYTE;
32028     struct {
32029
32030 #ifdef __RX_LITTLE_ENDIAN__
32031         unsigned char IICINTM : 1;
32032         unsigned char IICCSC : 1;
32033         unsigned char : 3;
32034         unsigned char IICACKT : 1;
32035         unsigned char : 2;
32036 #else
32037         unsigned char : 2;
32038         unsigned char IICACKT : 1;
32039         unsigned char : 3;
32040         unsigned char IICCSC : 1;
32041         unsigned char IICINTM : 1;
32042 #endif
32043     } BIT;
32044     } SIMR2;
32045     union {
32046         unsigned char BYTE;
32047     struct {
32048
32049 #ifdef __RX_LITTLE_ENDIAN__
32050         unsigned char IICSTAREQ : 1;
32051         unsigned char IICRSTAREQ : 1;
32052         unsigned char IICSTPREQ : 1;
32053         unsigned char IICSTIF : 1;
32054         unsigned char IICSDAS : 2;
32055         unsigned char IICSCLS : 2;
32056 #else
32057         unsigned char IICSCLS : 2;
32058         unsigned char IICSDAS : 2;
32059         unsigned char IICSTIF : 1;
32060         unsigned char IICSTPREQ : 1;
32061         unsigned char IICRSTAREQ : 1;
32062         unsigned char IICSTAREQ : 1;
32063 #endif
32064     } BIT;
32065     } SIMR3;
32066     union {
32067         unsigned char BYTE;
32068     struct {
32069
32070 #ifdef __RX_LITTLE_ENDIAN__
32071         unsigned char IICACKR : 1;
32072         unsigned char : 7;
32073 #else
32074         unsigned char : 7;
32075         unsigned char IICACKR : 1;
32076 #endif
32077     } BIT;
```

```

32078     } SISR;
32079     union {
32080         unsigned char BYTE;
32081         struct {
32082
32083 #ifdef __RX_LITTLE_ENDIAN__
32084         unsigned char SSE : 1;
32085         unsigned char CTSE : 1;
32086         unsigned char MSS : 1;
32087         unsigned char : 1;
32088         unsigned char MFF : 1;
32089         unsigned char : 1;
32090         unsigned char CKPOL : 1;
32091         unsigned char CKPH : 1;
32092 #else
32093         unsigned char CKPH : 1;
32094         unsigned char CKPOL : 1;
32095         unsigned char : 1;
32096         unsigned char MFF : 1;
32097         unsigned char : 1;
32098         unsigned char MSS : 1;
32099         unsigned char CTSE : 1;
32100         unsigned char SSE : 1;
32101 #endif
32102     } BIT;
32103     } SPMR;
32104     union {
32105         unsigned short WORD;
32106         struct {
32107             unsigned char TDRH;
32108             unsigned char TDRL;
32109         } BYTE;
32110     } TDRHL;
32111     union {
32112         unsigned short WORD;
32113         struct {
32114             unsigned char RDRH;
32115             unsigned char RDRL;
32116         } BYTE;
32117     } RDRHL;
32118     unsigned char MDDR;
32119     char wk0[13];
32120     union {
32121         unsigned char BYTE;
32122         struct {
32123
32124 #ifdef __RX_LITTLE_ENDIAN__
32125         unsigned char ESME : 1;
32126         unsigned char : 7;
32127 #else
32128         unsigned char : 7;
32129         unsigned char ESME : 1;
32130 #endif
32131     } BIT;
32132     } ESMER;
32133     union {
32134         unsigned char BYTE;
32135         struct {
32136
32137 #ifdef __RX_LITTLE_ENDIAN__
32138         unsigned char : 1;
32139         unsigned char SFSF : 1;
32140         unsigned char RXDSF : 1;
32141         unsigned char BRME : 1;
32142         unsigned char : 4;
32143 #else
32144         unsigned char : 4;
32145         unsigned char BRME : 1;
32146         unsigned char RXDSF : 1;
32147         unsigned char SFSF : 1;
32148         unsigned char : 1;
32149 #endif
32150     } BIT;
32151     } CR0;
32152     union {
32153         unsigned char BYTE;
32154         struct {
32155
32156 #ifdef __RX_LITTLE_ENDIAN__
32157         unsigned char BFE : 1;
32158         unsigned char CF0RE : 1;
32159         unsigned char CF1DS : 2;
32160         unsigned char PIBE : 1;
32161         unsigned char PIBS : 3;
32162 #else
32163         unsigned char PIBS : 3;
32164         unsigned char PIBE : 1;

```

```

32165         unsigned char CF1DS : 2;
32166         unsigned char CF0RE : 1;
32167         unsigned char BFE : 1;
32168     #endif
32169     } BIT;
32170     } CR1;
32171     union {
32172         unsigned char BYTE;
32173         struct {
32174
32175     #ifdef __RX_LITTLE_ENDIAN__
32176         unsigned char DFCS : 3;
32177         unsigned char : 1;
32178         unsigned char BCCS : 2;
32179         unsigned char RTS : 2;
32180     #else
32181         unsigned char RTS : 2;
32182         unsigned char BCCS : 2;
32183         unsigned char : 1;
32184         unsigned char DFCS : 3;
32185     #endif
32186     } BIT;
32187     } CR2;
32188     union {
32189         unsigned char BYTE;
32190         struct {
32191
32192     #ifdef __RX_LITTLE_ENDIAN__
32193         unsigned char SDST : 1;
32194         unsigned char : 7;
32195     #else
32196         unsigned char : 7;
32197         unsigned char SDST : 1;
32198     #endif
32199     } BIT;
32200     } CR3;
32201     union {
32202         unsigned char BYTE;
32203         struct {
32204
32205     #ifdef __RX_LITTLE_ENDIAN__
32206         unsigned char TXDXPS : 1;
32207         unsigned char RXDXPS : 1;
32208         unsigned char : 2;
32209         unsigned char SHARPS : 1;
32210         unsigned char : 3;
32211     #else
32212         unsigned char : 3;
32213         unsigned char SHARPS : 1;
32214         unsigned char : 2;
32215         unsigned char RXDXPS : 1;
32216         unsigned char TXDXPS : 1;
32217     #endif
32218     } BIT;
32219     } PCR;
32220     union {
32221         unsigned char BYTE;
32222         struct {
32223
32224     #ifdef __RX_LITTLE_ENDIAN__
32225         unsigned char BFDIE : 1;
32226         unsigned char CF0MIE : 1;
32227         unsigned char CF1MIE : 1;
32228         unsigned char PIBDIE : 1;
32229         unsigned char BCDIE : 1;
32230         unsigned char AEDIE : 1;
32231         unsigned char : 2;
32232     #else
32233         unsigned char : 2;
32234         unsigned char AEDIE : 1;
32235         unsigned char BCDIE : 1;
32236         unsigned char PIBDIE : 1;
32237         unsigned char CF1MIE : 1;
32238         unsigned char CF0MIE : 1;
32239         unsigned char BFDIE : 1;
32240     #endif
32241     } BIT;
32242     } ICR;
32243     union {
32244         unsigned char BYTE;
32245         struct {
32246
32247     #ifdef __RX_LITTLE_ENDIAN__
32248         unsigned char BFDF : 1;
32249         unsigned char CF0MF : 1;
32250         unsigned char CF1MF : 1;
32251         unsigned char PIBDF : 1;

```

```

32252         unsigned char BCDF : 1;
32253         unsigned char AEDF : 1;
32254         unsigned char : 2;
32255 #else
32256         unsigned char : 2;
32257         unsigned char AEDF : 1;
32258         unsigned char BCDF : 1;
32259         unsigned char PIBDF : 1;
32260         unsigned char CF1MF : 1;
32261         unsigned char CF0MF : 1;
32262         unsigned char BFDf : 1;
32263 #endif
32264     } BIT;
32265     } STR;
32266     union {
32267         unsigned char BYTE;
32268     struct {
32269
32270 #ifdef __RX_LITTLE_ENDIAN__
32271         unsigned char BFDCL : 1;
32272         unsigned char CF0MCL : 1;
32273         unsigned char CF1MCL : 1;
32274         unsigned char PIBDCL : 1;
32275         unsigned char BCDCL : 1;
32276         unsigned char AEDCL : 1;
32277         unsigned char : 2;
32278 #else
32279         unsigned char : 2;
32280         unsigned char AEDCL : 1;
32281         unsigned char BCDCL : 1;
32282         unsigned char PIBDCL : 1;
32283         unsigned char CF1MCL : 1;
32284         unsigned char CF0MCL : 1;
32285         unsigned char BFDCL : 1;
32286 #endif
32287     } BIT;
32288     } STCR;
32289     unsigned char CF0DR;
32290     union {
32291         unsigned char BYTE;
32292     struct {
32293
32294 #ifdef __RX_LITTLE_ENDIAN__
32295         unsigned char CF0CE0 : 1;
32296         unsigned char CF0CE1 : 1;
32297         unsigned char CF0CE2 : 1;
32298         unsigned char CF0CE3 : 1;
32299         unsigned char CF0CE4 : 1;
32300         unsigned char CF0CE5 : 1;
32301         unsigned char CF0CE6 : 1;
32302         unsigned char CF0CE7 : 1;
32303 #else
32304         unsigned char CF0CE7 : 1;
32305         unsigned char CF0CE6 : 1;
32306         unsigned char CF0CE5 : 1;
32307         unsigned char CF0CE4 : 1;
32308         unsigned char CF0CE3 : 1;
32309         unsigned char CF0CE2 : 1;
32310         unsigned char CF0CE1 : 1;
32311         unsigned char CF0CE0 : 1;
32312 #endif
32313     } BIT;
32314     } CF0CR;
32315     unsigned char CF0RR;
32316     unsigned char PCF1DR;
32317     unsigned char SCF1DR;
32318     union {
32319         unsigned char BYTE;
32320     struct {
32321
32322 #ifdef __RX_LITTLE_ENDIAN__
32323         unsigned char CF1CE0 : 1;
32324         unsigned char CF1CE1 : 1;
32325         unsigned char CF1CE2 : 1;
32326         unsigned char CF1CE3 : 1;
32327         unsigned char CF1CE4 : 1;
32328         unsigned char CF1CE5 : 1;
32329         unsigned char CF1CE6 : 1;
32330         unsigned char CF1CE7 : 1;
32331 #else
32332         unsigned char CF1CE7 : 1;
32333         unsigned char CF1CE6 : 1;
32334         unsigned char CF1CE5 : 1;
32335         unsigned char CF1CE4 : 1;
32336         unsigned char CF1CE3 : 1;
32337         unsigned char CF1CE2 : 1;
32338         unsigned char CF1CE1 : 1;

```

```

32339         unsigned char CF1CE0 : 1;
32340 #endif
32341     } BIT;
32342 } CF1CR;
32343     unsigned char CF1RR;
32344     union {
32345         unsigned char BYTE;
32346     struct {
32347
32348 #ifdef __RX_LITTLE_ENDIAN__
32349         unsigned char TCST : 1;
32350         unsigned char : 7;
32351 #else
32352         unsigned char : 7;
32353         unsigned char TCST : 1;
32354 #endif
32355     } BIT;
32356     } TCR;
32357     union {
32358         unsigned char BYTE;
32359     struct {
32360
32361 #ifdef __RX_LITTLE_ENDIAN__
32362         unsigned char TOMS : 2;
32363         unsigned char : 1;
32364         unsigned char TWRC : 1;
32365         unsigned char TCSS : 3;
32366         unsigned char : 1;
32367 #else
32368         unsigned char : 1;
32369         unsigned char TCSS : 3;
32370         unsigned char TWRC : 1;
32371         unsigned char : 1;
32372         unsigned char TOMS : 2;
32373 #endif
32374     } BIT;
32375     } TMR;
32376     unsigned char TPPE;
32377     unsigned char TCNT;
32378 } st_sci12_t;
32379
32380 typedef struct st_sdhi {
32381     union {
32382         unsigned long LONG;
32383 #ifdef IODEFINE_H_HISTORY
32384     struct {
32385
32386 #ifdef __RX_LITTLE_ENDIAN__
32387         unsigned long CMDIDX : 6;
32388         unsigned long ACMD : 2;
32389         unsigned long RSPT : 3;
32390         unsigned long CMDTP : 1;
32391         unsigned long CMDRW : 1;
32392         unsigned long TRSTP : 1;
32393         unsigned long CMD12AT : 2;
32394         unsigned long : 16;
32395 #else
32396         unsigned long : 16;
32397         unsigned long CMD12AT : 2;
32398         unsigned long TRSTP : 1;
32399         unsigned long CMDRW : 1;
32400         unsigned long CMDTP : 1;
32401         unsigned long RSPT : 3;
32402         unsigned long ACMD : 2;
32403         unsigned long CMDIDX : 6;
32404 #endif
32405     } BIT;
32406 #endif
32407     } SDCMD;
32408     char wk0[4];
32409     unsigned long SDARG;
32410     char wk1[4];
32411     union {
32412         unsigned long LONG;
32413     struct {
32414
32415 #ifdef __RX_LITTLE_ENDIAN__
32416         unsigned long STP : 1;
32417         unsigned long : 7;
32418         unsigned long SDBLKCNTEN : 1;
32419         unsigned long : 23;
32420 #else
32421         unsigned long : 23;
32422         unsigned long SDBLKCNTEN : 1;
32423         unsigned long : 7;
32424         unsigned long STP : 1;
32425 #endif

```

```

32426     } BIT;
32427     } SDSTOP;
32428     unsigned long  SDBLKCNT;
32429     unsigned long  SDRSP10;
32430     char           wk2[4];
32431     unsigned long  SDRSP32;
32432     char           wk3[4];
32433     unsigned long  SDRSP54;
32434     char           wk4[4];
32435     unsigned long  SDRSP76;
32436     char           wk5[4];
32437     union {
32438         unsigned long LONG;
32439     } struct {
32440
32441     #ifdef __RX_LITTLE_ENDIAN__
32442         unsigned long RSPEND : 1;
32443         unsigned long  : 1;
32444         unsigned long ACEND : 1;
32445         unsigned long SDCDRM : 1;
32446         unsigned long SDCDIN : 1;
32447         unsigned long SDCDMON : 1;
32448         unsigned long  : 1;
32449         unsigned long SDWPMON : 1;
32450         unsigned long SDD3RM : 1;
32451         unsigned long SDD3IN : 1;
32452         unsigned long SDD3MON : 1;
32453         unsigned long  : 21;
32454     #else
32455         unsigned long  : 21;
32456         unsigned long SDD3MON : 1;
32457         unsigned long SDD3IN : 1;
32458         unsigned long SDD3RM : 1;
32459         unsigned long SDWPMON : 1;
32460         unsigned long  : 1;
32461         unsigned long SDCDMON : 1;
32462         unsigned long SDCDIN : 1;
32463         unsigned long SDCDRM : 1;
32464         unsigned long ACEND : 1;
32465         unsigned long  : 1;
32466         unsigned long RSPEND : 1;
32467     #endif
32468     } BIT;
32469     } SDSTS1;
32470     union {
32471         unsigned long LONG;
32472     } struct {
32473
32474     #ifdef __RX_LITTLE_ENDIAN__
32475         unsigned long CMDE : 1;
32476         unsigned long CRCE : 1;
32477         unsigned long ENDE : 1;
32478         unsigned long DTO : 1;
32479         unsigned long ILW : 1;
32480         unsigned long ILR : 1;
32481         unsigned long RSPTO : 1;
32482         unsigned long SDD0MON : 1;
32483         unsigned long BRE : 1;
32484         unsigned long BWE : 1;
32485         unsigned long  : 3;
32486         unsigned long SDCLKCREN : 1;
32487         unsigned long CBSY : 1;
32488         unsigned long ILA : 1;
32489         unsigned long  : 16;
32490     #else
32491         unsigned long  : 16;
32492         unsigned long ILA : 1;
32493         unsigned long CBSY : 1;
32494         unsigned long SDCLKCREN : 1;
32495         unsigned long  : 3;
32496         unsigned long BWE : 1;
32497         unsigned long BRE : 1;
32498         unsigned long SDD0MON : 1;
32499         unsigned long RSPTO : 1;
32500         unsigned long ILR : 1;
32501         unsigned long ILW : 1;
32502         unsigned long DTO : 1;
32503         unsigned long ENDE : 1;
32504         unsigned long CRCE : 1;
32505         unsigned long CMDE : 1;
32506     #endif
32507     } BIT;
32508     } SDSTS2;
32509     union {
32510         unsigned long LONG;
32511     } struct {
32512

```

```

32513 #ifdef __RX_LITTLE_ENDIAN__
32514     unsigned long RSPENDM : 1;
32515     unsigned long : 1;
32516     unsigned long ACENDM : 1;
32517     unsigned long SDCDRMM : 1;
32518     unsigned long SDCDINM : 1;
32519     unsigned long : 3;
32520     unsigned long SDD3RMM : 1;
32521     unsigned long SDD3INM : 1;
32522     unsigned long : 22;
32523 #else
32524     unsigned long : 22;
32525     unsigned long SDD3INM : 1;
32526     unsigned long SDD3RMM : 1;
32527     unsigned long : 3;
32528     unsigned long SDCDINM : 1;
32529     unsigned long SDCDRMM : 1;
32530     unsigned long ACENDM : 1;
32531     unsigned long : 1;
32532     unsigned long RSPENDM : 1;
32533 #endif
32534 } BIT;
32535 } SDIMSK1;
32536 union {
32537     unsigned long LONG;
32538     struct {
32539
32540 #ifdef __RX_LITTLE_ENDIAN__
32541     unsigned long CMDEM : 1;
32542     unsigned long CRCM : 1;
32543     unsigned long ENDEM : 1;
32544     unsigned long DTTOM : 1;
32545     unsigned long ILWM : 1;
32546     unsigned long ILRM : 1;
32547     unsigned long RSPTOM : 1;
32548     unsigned long : 1;
32549     unsigned long BREM : 1;
32550     unsigned long BWEM : 1;
32551     unsigned long : 5;
32552     unsigned long ILAM : 1;
32553     unsigned long : 16;
32554 #else
32555     unsigned long : 16;
32556     unsigned long ILAM : 1;
32557     unsigned long : 5;
32558     unsigned long BWEM : 1;
32559     unsigned long BREM : 1;
32560     unsigned long : 1;
32561     unsigned long RSPTOM : 1;
32562     unsigned long ILRM : 1;
32563     unsigned long ILWM : 1;
32564     unsigned long DTTOM : 1;
32565     unsigned long ENDEM : 1;
32566     unsigned long CRCM : 1;
32567     unsigned long CMDEM : 1;
32568 #endif
32569 } BIT;
32570 } SDIMSK2;
32571 union {
32572     unsigned long LONG;
32573     struct {
32574
32575 #ifdef __RX_LITTLE_ENDIAN__
32576     unsigned long CLKSEL : 8;
32577     unsigned long CLKEN : 1;
32578     unsigned long CLKCTRLLEN : 1;
32579     unsigned long : 22;
32580 #else
32581     unsigned long : 22;
32582     unsigned long CLKCTRLLEN : 1;
32583     unsigned long CLKEN : 1;
32584     unsigned long CLKSEL : 8;
32585 #endif
32586 } BIT;
32587 } SDCLKCR;
32588 union {
32589     unsigned long LONG;
32590     struct {
32591
32592 #ifdef __RX_LITTLE_ENDIAN__
32593     unsigned long LEN : 10;
32594     unsigned long : 22;
32595 #else
32596     unsigned long : 22;
32597     unsigned long LEN : 10;
32598 #endif
32599 } BIT;

```

```

32600     } SDSIZE;
32601     union {
32602         unsigned long LONG;
32603     struct {
32604
32605 #ifdef __RX_LITTLE_ENDIAN__
32606         unsigned long CTOP : 4;
32607         unsigned long TOP : 4;
32608         unsigned long : 7;
32609         unsigned long WIDTH : 1;
32610         unsigned long : 16;
32611 #else
32612         unsigned long : 16;
32613         unsigned long WIDTH : 1;
32614         unsigned long : 7;
32615         unsigned long TOP : 4;
32616         unsigned long CTOP : 4;
32617 #endif
32618     } BIT;
32619     } SDOPT;
32620     char        wk6[4];
32621     union {
32622         unsigned long LONG;
32623     struct {
32624
32625 #ifdef __RX_LITTLE_ENDIAN__
32626         unsigned long CMDE0 : 1;
32627         unsigned long CMDE1 : 1;
32628         unsigned long RSPLNE0 : 1;
32629         unsigned long RSPLNE1 : 1;
32630         unsigned long RDLENE : 1;
32631         unsigned long CRCLNE : 1;
32632         unsigned long : 2;
32633         unsigned long RSPCRCE0 : 1;
32634         unsigned long RSPCRCE1 : 1;
32635         unsigned long RDCRCE : 1;
32636         unsigned long CRCTK : 1;
32637         unsigned long CRCTK : 3;
32638         unsigned long : 17;
32639 #else
32640         unsigned long : 17;
32641         unsigned long CRCTK : 3;
32642         unsigned long CRCTK : 1;
32643         unsigned long RDCRCE : 1;
32644         unsigned long RSPCRCE1 : 1;
32645         unsigned long RSPCRCE0 : 1;
32646         unsigned long : 2;
32647         unsigned long CRCLNE : 1;
32648         unsigned long RDLENE : 1;
32649         unsigned long RSPLNE1 : 1;
32650         unsigned long RSPLNE0 : 1;
32651         unsigned long CMDE1 : 1;
32652         unsigned long CMDE0 : 1;
32653 #endif
32654     } BIT;
32655     } SDERSTS1;
32656     union {
32657         unsigned long LONG;
32658     struct {
32659
32660 #ifdef __RX_LITTLE_ENDIAN__
32661         unsigned long RSPTO0 : 1;
32662         unsigned long RSPTO1 : 1;
32663         unsigned long BSYTO0 : 1;
32664         unsigned long BSYTO1 : 1;
32665         unsigned long RDTO : 1;
32666         unsigned long CRCTO : 1;
32667         unsigned long CRCBSYTO : 1;
32668         unsigned long : 25;
32669 #else
32670         unsigned long : 25;
32671         unsigned long CRCBSYTO : 1;
32672         unsigned long CRCTO : 1;
32673         unsigned long RDTO : 1;
32674         unsigned long BSYTO1 : 1;
32675         unsigned long BSYTO0 : 1;
32676         unsigned long RSPTO1 : 1;
32677         unsigned long RSPTO0 : 1;
32678 #endif
32679     } BIT;
32680     } SDERSTS2;
32681     unsigned long SDBUFR;
32682     char        wk7[4];
32683     union {
32684         unsigned long LONG;
32685     struct {
32686

```

```

32687 #ifdef __RX_LITTLE_ENDIAN__
32688     unsigned long INTEN : 1;
32689     unsigned long : 1;
32690     unsigned long RWREQ : 1;
32691     unsigned long : 5;
32692     unsigned long IOABT : 1;
32693     unsigned long C52PUB : 1;
32694     unsigned long : 22;
32695 #else
32696     unsigned long : 22;
32697     unsigned long C52PUB : 1;
32698     unsigned long IOABT : 1;
32699     unsigned long : 5;
32700     unsigned long RWREQ : 1;
32701     unsigned long : 1;
32702     unsigned long INTEN : 1;
32703 #endif
32704     } BIT;
32705     } SDIOMD;
32706     union {
32707         unsigned long LONG;
32708         struct {
32709
32710 #ifdef __RX_LITTLE_ENDIAN__
32711         unsigned long IOIRQ : 1;
32712         unsigned long : 13;
32713         unsigned long EXPUB52 : 1;
32714         unsigned long EXWT : 1;
32715         unsigned long : 16;
32716 #else
32717         unsigned long : 16;
32718         unsigned long EXWT : 1;
32719         unsigned long EXPUB52 : 1;
32720         unsigned long : 13;
32721         unsigned long IOIRQ : 1;
32722 #endif
32723         } BIT;
32724         } SDIOSTS;
32725         union {
32726             unsigned long LONG;
32727             struct {
32728
32729 #ifdef __RX_LITTLE_ENDIAN__
32730             unsigned long IOIRQM : 1;
32731             unsigned long : 13;
32732             unsigned long EXPUB52M : 1;
32733             unsigned long EXWTM : 1;
32734             unsigned long : 16;
32735 #else
32736             unsigned long : 16;
32737             unsigned long EXWTM : 1;
32738             unsigned long EXPUB52M : 1;
32739             unsigned long : 13;
32740             unsigned long IOIRQM : 1;
32741 #endif
32742             } BIT;
32743             } SDIOIMSK;
32744             char wk8[316];
32745             union {
32746                 unsigned long LONG;
32747                 struct {
32748
32749 #ifdef __RX_LITTLE_ENDIAN__
32750                 unsigned long : 1;
32751                 unsigned long DMAEN : 1;
32752                 unsigned long : 30;
32753 #else
32754                 unsigned long : 30;
32755                 unsigned long DMAEN : 1;
32756                 unsigned long : 1;
32757 #endif
32758                 } BIT;
32759                 } SDDMAEN;
32760                 char wk9[12];
32761                 union {
32762                     unsigned long LONG;
32763                     struct {
32764
32765 #ifdef __RX_LITTLE_ENDIAN__
32766                     unsigned long SDRST : 1;
32767                     unsigned long : 31;
32768 #else
32769                     unsigned long : 31;
32770                     unsigned long SDRST : 1;
32771 #endif
32772                     } BIT;
32773                     } SDRST;

```

```

32774     union {
32775         unsigned long LONG;
32776     struct {
32777
32778 #ifdef __RX_LITTLE_ENDIAN__
32779         unsigned long IP1 : 8;
32780         unsigned long IP2 : 4;
32781         unsigned long   : 2;
32782         unsigned long CLKRAT : 1;
32783         unsigned long CPRM : 1;
32784         unsigned long   : 16;
32785 #else
32786         unsigned long   : 16;
32787         unsigned long CPRM : 1;
32788         unsigned long CLKRAT : 1;
32789         unsigned long   : 2;
32790         unsigned long IP2 : 4;
32791         unsigned long IP1 : 8;
32792 #endif
32793     } BIT;
32794     } SDVER;
32795     char          wk10[24];
32796     union {
32797         unsigned long LONG;
32798     struct {
32799
32800 #ifdef __RX_LITTLE_ENDIAN__
32801         unsigned long   : 6;
32802         unsigned long BWSWP : 1;
32803         unsigned long BRSWP : 1;
32804         unsigned long   : 24;
32805 #else
32806         unsigned long   : 24;
32807         unsigned long BRSWP : 1;
32808         unsigned long BWSWP : 1;
32809         unsigned long   : 6;
32810 #endif
32811     } BIT;
32812     } SDSWAP;
32813 } st_sdhi_t;
32814
32815 typedef struct st_smci {
32816     union {
32817         unsigned char BYTE;
32818     struct {
32819
32820 #ifdef __RX_LITTLE_ENDIAN__
32821         unsigned char CKS : 2;
32822         unsigned char BCP : 2;
32823         unsigned char PM : 1;
32824         unsigned char PE : 1;
32825         unsigned char BLK : 1;
32826         unsigned char GM : 1;
32827 #else
32828         unsigned char GM : 1;
32829         unsigned char BLK : 1;
32830         unsigned char PE : 1;
32831         unsigned char PM : 1;
32832         unsigned char BCP : 2;
32833         unsigned char CKS : 2;
32834 #endif
32835     } BIT;
32836     } SMR;
32837     char          wk0[1];
32838     union {
32839         unsigned char BYTE;
32840     struct {
32841
32842 #ifdef __RX_LITTLE_ENDIAN__
32843         unsigned char CKE : 2;
32844         unsigned char TEIE : 1;
32845         unsigned char MPIE : 1;
32846         unsigned char RE : 1;
32847         unsigned char TE : 1;
32848         unsigned char RIE : 1;
32849         unsigned char TIE : 1;
32850 #else
32851         unsigned char TIE : 1;
32852         unsigned char RIE : 1;
32853         unsigned char TE : 1;
32854         unsigned char RE : 1;
32855         unsigned char MPIE : 1;
32856         unsigned char TEIE : 1;
32857         unsigned char CKE : 2;
32858 #endif
32859     } BIT;
32860     } SCR;

```

```

32861     char            wk1[1];
32862     union {
32863         unsigned char BYTE;
32864         struct {
32865
32866 #ifdef __RX_LITTLE_ENDIAN__
32867         unsigned char MPBT : 1;
32868         unsigned char MPB : 1;
32869         unsigned char TEND : 1;
32870         unsigned char PER : 1;
32871         unsigned char ERS : 1;
32872         unsigned char ORER : 1;
32873         unsigned char RDRF : 1;
32874         unsigned char TDRE : 1;
32875 #else
32876         unsigned char TDRE : 1;
32877         unsigned char RDRF : 1;
32878         unsigned char ORER : 1;
32879         unsigned char ERS : 1;
32880         unsigned char PER : 1;
32881         unsigned char TEND : 1;
32882         unsigned char MPB : 1;
32883         unsigned char MPBT : 1;
32884 #endif
32885     } BIT;
32886     } SSR;
32887     char            wk2[1];
32888     union {
32889         unsigned char BYTE;
32890         struct {
32891
32892 #ifdef __RX_LITTLE_ENDIAN__
32893         unsigned char SMIF : 1;
32894         unsigned char : 1;
32895         unsigned char SINV : 1;
32896         unsigned char SDIR : 1;
32897         unsigned char CHR1 : 1;
32898         unsigned char : 2;
32899         unsigned char BCP2 : 1;
32900 #else
32901         unsigned char BCP2 : 1;
32902         unsigned char : 2;
32903         unsigned char CHR1 : 1;
32904         unsigned char SDIR : 1;
32905         unsigned char SINV : 1;
32906         unsigned char : 1;
32907         unsigned char SMIF : 1;
32908 #endif
32909     } BIT;
32910     } SCMR;
32911 } st_smci_t;
32912
32913 typedef struct st_ssie {
32914     union {
32915         unsigned long LONG;
32916         struct {
32917
32918 #ifdef __RX_LITTLE_ENDIAN__
32919         unsigned long REN : 1;
32920         unsigned long TEN : 1;
32921         unsigned long : 1;
32922         unsigned long MUEN : 1;
32923         unsigned long CKDV : 4;
32924         unsigned long DEL : 1;
32925         unsigned long PDTA : 1;
32926         unsigned long SDTA : 1;
32927         unsigned long SPDP : 1;
32928         unsigned long LRCKP : 1;
32929         unsigned long BCKP : 1;
32930         unsigned long MST : 1;
32931         unsigned long : 1;
32932         unsigned long SWL : 3;
32933         unsigned long DWL : 3;
32934         unsigned long FRM : 2;
32935         unsigned long : 1;
32936         unsigned long IIEN : 1;
32937         unsigned long ROIEN : 1;
32938         unsigned long RUIEN : 1;
32939         unsigned long TOIEN : 1;
32940         unsigned long TUIEN : 1;
32941         unsigned long : 2;
32942 #else
32943         unsigned long : 2;
32944         unsigned long TUIEN : 1;
32945         unsigned long TOIEN : 1;
32946         unsigned long RUIEN : 1;
32947         unsigned long ROIEN : 1;

```

```

32948     unsigned long IIEN : 1;
32949     unsigned long  : 1;
32950     unsigned long FRM : 2;
32951     unsigned long DWL : 3;
32952     unsigned long SWL : 3;
32953     unsigned long  : 1;
32954     unsigned long MST : 1;
32955     unsigned long BCKP : 1;
32956     unsigned long LRCKP : 1;
32957     unsigned long SPDP : 1;
32958     unsigned long SDTA : 1;
32959     unsigned long PDTA : 1;
32960     unsigned long DEL : 1;
32961     unsigned long CKDV : 4;
32962     unsigned long MUEN : 1;
32963     unsigned long  : 1;
32964     unsigned long TEN : 1;
32965     unsigned long REN : 1;
32966 #endif
32967     } BIT;
32968     } SSICR;
32969     union {
32970         unsigned long LONG;
32971         struct {
32972
32973 #ifdef __RX_LITTLE_ENDIAN__
32974         unsigned long  : 25;
32975         unsigned long IIRQ : 1;
32976         unsigned long ROIRQ : 1;
32977         unsigned long RUIRQ : 1;
32978         unsigned long TOIRQ : 1;
32979         unsigned long TUIRQ : 1;
32980         unsigned long  : 2;
32981 #else
32982         unsigned long  : 2;
32983         unsigned long TUIRQ : 1;
32984         unsigned long TOIRQ : 1;
32985         unsigned long RUIRQ : 1;
32986         unsigned long ROIRQ : 1;
32987         unsigned long IIRQ : 1;
32988         unsigned long  : 25;
32989 #endif
32990     } BIT;
32991     } SSISR;
32992     char      wk0[8];
32993     union {
32994         unsigned long LONG;
32995         struct {
32996
32997 #ifdef __RX_LITTLE_ENDIAN__
32998         unsigned long RFRST : 1;
32999         unsigned long TFRST : 1;
33000         unsigned long RIE : 1;
33001         unsigned long TIE : 1;
33002         unsigned long  : 7;
33003         unsigned long BSW : 1;
33004         unsigned long  : 4;
33005         unsigned long SSIRST : 1;
33006         unsigned long  : 14;
33007         unsigned long AUCKE : 1;
33008 #else
33009         unsigned long AUCKE : 1;
33010         unsigned long  : 14;
33011         unsigned long SSIRST : 1;
33012         unsigned long  : 4;
33013         unsigned long BSW : 1;
33014         unsigned long  : 7;
33015         unsigned long TIE : 1;
33016         unsigned long RIE : 1;
33017         unsigned long TFRST : 1;
33018         unsigned long RFRST : 1;
33019 #endif
33020     } BIT;
33021     } SSIFCR;
33022     union {
33023         unsigned long LONG;
33024         struct {
33025
33026 #ifdef __RX_LITTLE_ENDIAN__
33027         unsigned long RDF : 1;
33028         unsigned long  : 7;
33029         unsigned long RDC : 6;
33030         unsigned long  : 2;
33031         unsigned long TDE : 1;
33032         unsigned long  : 7;
33033         unsigned long TDC : 6;
33034         unsigned long  : 2;

```

```

33035 #else
33036     unsigned long : 2;
33037     unsigned long TDC : 6;
33038     unsigned long : 7;
33039     unsigned long TDE : 1;
33040     unsigned long : 2;
33041     unsigned long RDC : 6;
33042     unsigned long : 7;
33043     unsigned long RDF : 1;
33044 #endif
33045 } BIT;
33046 } SSIFSR;
33047 union {
33048     unsigned long LONG;
33049     struct {
33050         unsigned short H;
33051     } WORD;
33052     struct {
33053         unsigned char HH;
33054     } BYTE;
33055 } SSIFTDR;
33056 union {
33057     unsigned long LONG;
33058     struct {
33059         unsigned short H;
33060     } WORD;
33061     struct {
33062         unsigned char HH;
33063     } BYTE;
33064 } SSIFRDR;
33065 union {
33066     unsigned long LONG;
33067     struct {
33068
33069 #ifdef __RX_LITTLE_ENDIAN__
33070         unsigned long OMOD : 2;
33071         unsigned long : 6;
33072         unsigned long LRCONT : 1;
33073         unsigned long BCKASTP : 1;
33074         unsigned long : 22;
33075 #else
33076         unsigned long : 22;
33077         unsigned long BCKASTP : 1;
33078         unsigned long LRCONT : 1;
33079         unsigned long : 6;
33080         unsigned long OMOD : 2;
33081 #endif
33082     } BIT;
33083     } SSIOFR;
33084     union {
33085         unsigned long LONG;
33086         struct {
33087
33088 #ifdef __RX_LITTLE_ENDIAN__
33089         unsigned long RDFS : 5;
33090         unsigned long : 3;
33091         unsigned long TDES : 5;
33092         unsigned long : 19;
33093 #else
33094         unsigned long : 19;
33095         unsigned long TDES : 5;
33096         unsigned long : 3;
33097         unsigned long RDFS : 5;
33098 #endif
33099     } BIT;
33100     } SSISCR;
33101 } st_ssie_t;
33102
33103 typedef struct st_system {
33104     union {
33105         unsigned short WORD;
33106         struct {
33107
33108 #ifdef __RX_LITTLE_ENDIAN__
33109         unsigned short MD : 1;
33110         unsigned short : 15;
33111 #else
33112         unsigned short : 15;
33113         unsigned short MD : 1;
33114 #endif
33115     } BIT;
33116     } MDMONR;
33117     char wk0[4];
33118     union {
33119         unsigned short WORD;
33120         struct {
33121

```

```

33122 #ifdef __RX_LITTLE_ENDIAN__
33123     unsigned short ROME : 1;
33124     unsigned short EXBE : 1;
33125     unsigned short : 6;
33126     unsigned short KEY : 8;
33127 #else
33128     unsigned short KEY : 8;
33129     unsigned short : 6;
33130     unsigned short EXBE : 1;
33131     unsigned short ROME : 1;
33132 #endif
33133     } BIT;
33134     } SYSCR0;
33135     union {
33136         unsigned short WORD;
33137         struct {
33138
33139 #ifdef __RX_LITTLE_ENDIAN__
33140         unsigned short RAME : 1;
33141         unsigned short : 5;
33142         unsigned short ECCRAME : 1;
33143         unsigned short SBYRAME : 1;
33144         unsigned short : 8;
33145 #else
33146         unsigned short : 8;
33147         unsigned short SBYRAME : 1;
33148         unsigned short ECCRAME : 1;
33149         unsigned short : 5;
33150         unsigned short RAME : 1;
33151 #endif
33152         } BIT;
33153         } SYSCR1;
33154         char          wk1[2];
33155         union {
33156             unsigned short WORD;
33157             struct {
33158
33159 #ifdef __RX_LITTLE_ENDIAN__
33160             unsigned short : 14;
33161             unsigned short OPE : 1;
33162             unsigned short SSBY : 1;
33163 #else
33164             unsigned short SSBY : 1;
33165             unsigned short OPE : 1;
33166             unsigned short : 14;
33167 #endif
33168             } BIT;
33169             } SBYCR;
33170             char          wk2[2];
33171             union {
33172                 unsigned long LONG;
33173                 struct {
33174
33175 #ifdef __RX_LITTLE_ENDIAN__
33176                 unsigned long MSTPA0 : 1;
33177                 unsigned long MSTPA1 : 1;
33178                 unsigned long : 2;
33179                 unsigned long MSTPA4 : 1;
33180                 unsigned long MSTPA5 : 1;
33181                 unsigned long : 1;
33182                 unsigned long MSTPA7 : 1;
33183                 unsigned long : 1;
33184                 unsigned long MSTPA9 : 1;
33185                 unsigned long MSTPA10 : 1;
33186                 unsigned long MSTPA11 : 1;
33187                 unsigned long : 1;
33188                 unsigned long MSTPA13 : 1;
33189                 unsigned long MSTPA14 : 1;
33190                 unsigned long MSTPA15 : 1;
33191                 unsigned long MSTPA16 : 1;
33192                 unsigned long MSTPA17 : 1;
33193                 unsigned long : 1;
33194                 unsigned long MSTPA19 : 1;
33195                 unsigned long : 4;
33196                 unsigned long MSTPA24 : 1;
33197                 unsigned long : 2;
33198                 unsigned long MSTPA27 : 1;
33199                 unsigned long MSTPA28 : 1;
33200                 unsigned long MSTPA29 : 1;
33201                 unsigned long : 1;
33202                 unsigned long ACSE : 1;
33203 #else
33204                 unsigned long ACSE : 1;
33205                 unsigned long : 1;
33206                 unsigned long MSTPA29 : 1;
33207                 unsigned long MSTPA28 : 1;
33208                 unsigned long MSTPA27 : 1;

```

```

33209         unsigned long : 2;
33210         unsigned long MSTPA24 : 1;
33211         unsigned long : 4;
33212         unsigned long MSTPA19 : 1;
33213         unsigned long : 1;
33214         unsigned long MSTPA17 : 1;
33215         unsigned long MSTPA16 : 1;
33216         unsigned long MSTPA15 : 1;
33217         unsigned long MSTPA14 : 1;
33218         unsigned long MSTPA13 : 1;
33219         unsigned long : 1;
33220         unsigned long MSTPA11 : 1;
33221         unsigned long MSTPA10 : 1;
33222         unsigned long MSTPA9 : 1;
33223         unsigned long : 1;
33224         unsigned long MSTPA7 : 1;
33225         unsigned long : 1;
33226         unsigned long MSTPA5 : 1;
33227         unsigned long MSTPA4 : 1;
33228         unsigned long : 2;
33229         unsigned long MSTPA1 : 1;
33230         unsigned long MSTPA0 : 1;
33231     #endif
33232     } BIT;
33233     } MSTPCRA;
33234     union {
33235         unsigned long LONG;
33236         struct {
33237
33238     #ifdef __RX_LITTLE_ENDIAN__
33239         unsigned long MSTPB0 : 1;
33240         unsigned long MSTPB1 : 1;
33241         unsigned long MSTPB2 : 1;
33242         unsigned long : 1;
33243         unsigned long MSTPB4 : 1;
33244         unsigned long : 1;
33245         unsigned long MSTPB6 : 1;
33246         unsigned long : 1;
33247         unsigned long MSTPB8 : 1;
33248         unsigned long MSTPB9 : 1;
33249         unsigned long : 3;
33250         unsigned long MSTPB13 : 1;
33251         unsigned long MSTPB14 : 1;
33252         unsigned long MSTPB15 : 1;
33253         unsigned long MSTPB16 : 1;
33254         unsigned long MSTPB17 : 1;
33255         unsigned long : 1;
33256         unsigned long MSTPB19 : 1;
33257         unsigned long MSTPB20 : 1;
33258         unsigned long MSTPB21 : 1;
33259         unsigned long MSTPB22 : 1;
33260         unsigned long MSTPB23 : 1;
33261         unsigned long MSTPB24 : 1;
33262         unsigned long MSTPB25 : 1;
33263         unsigned long MSTPB26 : 1;
33264         unsigned long MSTPB27 : 1;
33265         unsigned long MSTPB28 : 1;
33266         unsigned long MSTPB29 : 1;
33267         unsigned long MSTPB30 : 1;
33268         unsigned long MSTPB31 : 1;
33269     #else
33270         unsigned long MSTPB31 : 1;
33271         unsigned long MSTPB30 : 1;
33272         unsigned long MSTPB29 : 1;
33273         unsigned long MSTPB28 : 1;
33274         unsigned long MSTPB27 : 1;
33275         unsigned long MSTPB26 : 1;
33276         unsigned long MSTPB25 : 1;
33277         unsigned long MSTPB24 : 1;
33278         unsigned long MSTPB23 : 1;
33279         unsigned long MSTPB22 : 1;
33280         unsigned long MSTPB21 : 1;
33281         unsigned long MSTPB20 : 1;
33282         unsigned long MSTPB19 : 1;
33283         unsigned long : 1;
33284         unsigned long MSTPB17 : 1;
33285         unsigned long MSTPB16 : 1;
33286         unsigned long MSTPB15 : 1;
33287         unsigned long MSTPB14 : 1;
33288         unsigned long MSTPB13 : 1;
33289         unsigned long : 3;
33290         unsigned long MSTPB9 : 1;
33291         unsigned long MSTPB8 : 1;
33292         unsigned long : 1;
33293         unsigned long MSTPB6 : 1;
33294         unsigned long : 1;
33295         unsigned long MSTPB4 : 1;

```

```

33296         unsigned long : 1;
33297         unsigned long MSTPB2 : 1;
33298         unsigned long MSTPB1 : 1;
33299         unsigned long MSTPB0 : 1;
33300 #endif
33301     } BIT;
33302     } MSTPCRB;
33303     union {
33304         unsigned long LONG;
33305         struct {
33306
33307 #ifdef __RX_LITTLE_ENDIAN__
33308         unsigned long MSTPC0 : 1;
33309         unsigned long : 1;
33310         unsigned long MSTPC2 : 1;
33311         unsigned long : 3;
33312         unsigned long MSTPC6 : 1;
33313         unsigned long MSTPC7 : 1;
33314         unsigned long : 9;
33315         unsigned long MSTPC17 : 1;
33316         unsigned long : 1;
33317         unsigned long MSTPC19 : 1;
33318         unsigned long : 2;
33319         unsigned long MSTPC22 : 1;
33320         unsigned long MSTPC23 : 1;
33321         unsigned long MSTPC24 : 1;
33322         unsigned long MSTPC25 : 1;
33323         unsigned long MSTPC26 : 1;
33324         unsigned long MSTPC27 : 1;
33325         unsigned long MSTPC28 : 1;
33326         unsigned long MSTPC29 : 1;
33327         unsigned long : 2;
33328 #else
33329         unsigned long : 2;
33330         unsigned long MSTPC29 : 1;
33331         unsigned long MSTPC28 : 1;
33332         unsigned long MSTPC27 : 1;
33333         unsigned long MSTPC26 : 1;
33334         unsigned long MSTPC25 : 1;
33335         unsigned long MSTPC24 : 1;
33336         unsigned long MSTPC23 : 1;
33337         unsigned long MSTPC22 : 1;
33338         unsigned long : 2;
33339         unsigned long MSTPC19 : 1;
33340         unsigned long : 1;
33341         unsigned long MSTPC17 : 1;
33342         unsigned long : 9;
33343         unsigned long MSTPC7 : 1;
33344         unsigned long MSTPC6 : 1;
33345         unsigned long : 3;
33346         unsigned long MSTPC2 : 1;
33347         unsigned long : 1;
33348         unsigned long MSTPC0 : 1;
33349 #endif
33350     } BIT;
33351     } MSTPCRC;
33352     union {
33353         unsigned long LONG;
33354         struct {
33355
33356 #ifdef __RX_LITTLE_ENDIAN__
33357         unsigned long MSTPD0 : 1;
33358         unsigned long MSTPD1 : 1;
33359         unsigned long MSTPD2 : 1;
33360         unsigned long MSTPD3 : 1;
33361         unsigned long MSTPD4 : 1;
33362         unsigned long MSTPD5 : 1;
33363         unsigned long MSTPD6 : 1;
33364         unsigned long MSTPD7 : 1;
33365         unsigned long : 6;
33366         unsigned long MSTPD14 : 1;
33367         unsigned long MSTPD15 : 1;
33368         unsigned long : 3;
33369         unsigned long MSTPD19 : 1;
33370         unsigned long : 1;
33371         unsigned long MSTPD21 : 1;
33372         unsigned long : 5;
33373         unsigned long MSTPD27 : 1;
33374         unsigned long : 4;
33375 #else
33376         unsigned long : 4;
33377         unsigned long MSTPD27 : 1;
33378         unsigned long : 5;
33379         unsigned long MSTPD21 : 1;
33380         unsigned long : 1;
33381         unsigned long MSTPD19 : 1;
33382         unsigned long : 3;

```

```

33383         unsigned long MSTPD15 : 1;
33384         unsigned long MSTPD14 : 1;
33385         unsigned long      : 6;
33386         unsigned long MSTPD7 : 1;
33387         unsigned long MSTPD6 : 1;
33388         unsigned long MSTPD5 : 1;
33389         unsigned long MSTPD4 : 1;
33390         unsigned long MSTPD3 : 1;
33391         unsigned long MSTPD2 : 1;
33392         unsigned long MSTPD1 : 1;
33393         unsigned long MSTPD0 : 1;
33394     #endif
33395     } BIT;
33396     } MSTPCRD;
33397     union {
33398         unsigned long LONG;
33399     struct {
33400
33401     #ifdef __RX_LITTLE_ENDIAN__
33402         unsigned long PCKD : 4;
33403         unsigned long PCKC : 4;
33404         unsigned long PCKB : 4;
33405         unsigned long PCKA : 4;
33406         unsigned long BCK : 4;
33407         unsigned long      : 2;
33408         unsigned long PSTOP0 : 1;
33409         unsigned long PSTOP1 : 1;
33410         unsigned long ICK : 4;
33411         unsigned long FCK : 4;
33412     #else
33413         unsigned long FCK : 4;
33414         unsigned long ICK : 4;
33415         unsigned long PSTOP1 : 1;
33416         unsigned long PSTOP0 : 1;
33417         unsigned long      : 2;
33418         unsigned long BCK : 4;
33419         unsigned long PCKA : 4;
33420         unsigned long PCKB : 4;
33421         unsigned long PCKC : 4;
33422         unsigned long PCKD : 4;
33423     #endif
33424     } BIT;
33425     } SCKCR;
33426     union {
33427         unsigned short WORD;
33428     struct {
33429
33430     #ifdef __RX_LITTLE_ENDIAN__
33431         unsigned short      : 4;
33432         unsigned short UCK : 4;
33433         unsigned short      : 8;
33434     #else
33435         unsigned short      : 8;
33436         unsigned short UCK : 4;
33437         unsigned short      : 4;
33438     #endif
33439     } BIT;
33440     } SCKCR2;
33441     union {
33442         unsigned short WORD;
33443     struct {
33444
33445     #ifdef __RX_LITTLE_ENDIAN__
33446         unsigned short      : 8;
33447         unsigned short CKSEL : 3;
33448         unsigned short      : 5;
33449     #else
33450         unsigned short      : 5;
33451         unsigned short CKSEL : 3;
33452         unsigned short      : 8;
33453     #endif
33454     } BIT;
33455     } SCKCR3;
33456     union {
33457         unsigned short WORD;
33458     struct {
33459
33460     #ifdef __RX_LITTLE_ENDIAN__
33461         unsigned short PLIDIV : 2;
33462         unsigned short      : 2;
33463         unsigned short PLLSRCSEL : 1;
33464         unsigned short      : 3;
33465         unsigned short STC : 6;
33466         unsigned short      : 2;
33467     #else
33468         unsigned short      : 2;
33469         unsigned short STC : 6;

```

```

33470         unsigned short : 3;
33471         unsigned short PLLSRCSEL : 1;
33472         unsigned short : 2;
33473         unsigned short PLIDIV : 2;
33474     #endif
33475     } BIT;
33476     } PLLCR;
33477     union {
33478         unsigned char BYTE;
33479         struct {
33480
33481     #ifdef __RX_LITTLE_ENDIAN__
33482         unsigned char PLEN : 1;
33483         unsigned char : 7;
33484     #else
33485         unsigned char : 7;
33486         unsigned char PLEN : 1;
33487     #endif
33488     } BIT;
33489     } PLLCR2;
33490     char          wk3[5];
33491     union {
33492         unsigned char BYTE;
33493         struct {
33494
33495     #ifdef __RX_LITTLE_ENDIAN__
33496         unsigned char BCLKDIV : 1;
33497         unsigned char : 7;
33498     #else
33499         unsigned char : 7;
33500         unsigned char BCLKDIV : 1;
33501     #endif
33502     } BIT;
33503     } BCKCR;
33504     char          wk4[1];
33505     union {
33506         unsigned char BYTE;
33507         struct {
33508
33509     #ifdef __RX_LITTLE_ENDIAN__
33510         unsigned char MOSTP : 1;
33511         unsigned char : 7;
33512     #else
33513         unsigned char : 7;
33514         unsigned char MOSTP : 1;
33515     #endif
33516     } BIT;
33517     } MOSCCR;
33518     union {
33519         unsigned char BYTE;
33520         struct {
33521
33522     #ifdef __RX_LITTLE_ENDIAN__
33523         unsigned char SOSTP : 1;
33524         unsigned char : 7;
33525     #else
33526         unsigned char : 7;
33527         unsigned char SOSTP : 1;
33528     #endif
33529     } BIT;
33530     } SOSCCR;
33531     union {
33532         unsigned char BYTE;
33533         struct {
33534
33535     #ifdef __RX_LITTLE_ENDIAN__
33536         unsigned char LCSTP : 1;
33537         unsigned char : 7;
33538     #else
33539         unsigned char : 7;
33540         unsigned char LCSTP : 1;
33541     #endif
33542     } BIT;
33543     } LOCCR;
33544     union {
33545         unsigned char BYTE;
33546         struct {
33547
33548     #ifdef __RX_LITTLE_ENDIAN__
33549         unsigned char ILCSTP : 1;
33550         unsigned char : 7;
33551     #else
33552         unsigned char : 7;
33553         unsigned char ILCSTP : 1;
33554     #endif
33555     } BIT;
33556     } ILOCCR;

```

```

33557     union {
33558         unsigned char BYTE;
33559     struct {
33560
33561 #ifdef __RX_LITTLE_ENDIAN__
33562         unsigned char HCSTP : 1;
33563         unsigned char : 7;
33564 #else
33565         unsigned char : 7;
33566         unsigned char HCSTP : 1;
33567 #endif
33568     } BIT;
33569     } HOCOCR;
33570     union {
33571         unsigned char BYTE;
33572     struct {
33573
33574 #ifdef __RX_LITTLE_ENDIAN__
33575         unsigned char HCFRQ : 2;
33576         unsigned char : 6;
33577 #else
33578         unsigned char : 6;
33579         unsigned char HCFRQ : 2;
33580 #endif
33581     } BIT;
33582     } HOCOCR2;
33583     char        wk5[4];
33584     union {
33585         unsigned char BYTE;
33586     struct {
33587
33588 #ifdef __RX_LITTLE_ENDIAN__
33589         unsigned char MOOVF : 1;
33590         unsigned char SOOVF : 1;
33591         unsigned char PLOVF : 1;
33592         unsigned char HCOVF : 1;
33593         unsigned char ILCOVF : 1;
33594         unsigned char PPLOVF : 1;
33595         unsigned char : 2;
33596 #else
33597         unsigned char : 2;
33598         unsigned char PPLOVF : 1;
33599         unsigned char ILCOVF : 1;
33600         unsigned char HCOVF : 1;
33601         unsigned char PLOVF : 1;
33602         unsigned char SOOVF : 1;
33603         unsigned char MOOVF : 1;
33604 #endif
33605     } BIT;
33606     } OSCOVFSR;
33607     char        wk6[1];
33608     union {
33609         unsigned short WORD;
33610     struct {
33611
33612 #ifdef __RX_LITTLE_ENDIAN__
33613         unsigned short : 8;
33614         unsigned short CKOSEL : 3;
33615         unsigned short : 1;
33616         unsigned short CKODIV : 3;
33617         unsigned short CKOSTP : 1;
33618 #else
33619         unsigned short CKOSTP : 1;
33620         unsigned short CKODIV : 3;
33621         unsigned short : 1;
33622         unsigned short CKOSEL : 3;
33623         unsigned short : 8;
33624 #endif
33625     } BIT;
33626     } CKOCR;
33627     union {
33628         unsigned char BYTE;
33629     struct {
33630
33631 #ifdef __RX_LITTLE_ENDIAN__
33632         unsigned char OSTDIE : 1;
33633         unsigned char : 6;
33634         unsigned char OSTDE : 1;
33635 #else
33636         unsigned char OSTDE : 1;
33637         unsigned char : 6;
33638         unsigned char OSTDIE : 1;
33639 #endif
33640     } BIT;
33641     } OSTDCR;
33642     union {
33643         unsigned char BYTE;

```

```

33644     struct {
33645
33646 #ifdef __RX_LITTLE_ENDIAN__
33647     unsigned char OSTDF : 1;
33648     unsigned char  : 7;
33649 #else
33650     unsigned char  : 7;
33651     unsigned char OSTDF : 1;
33652 #endif
33653     } BIT;
33654     } OSTDSR;
33655     char      wk7[2];
33656     union {
33657         unsigned short WORD;
33658         struct {
33659
33660 #ifdef __RX_LITTLE_ENDIAN__
33661         unsigned short : 4;
33662         unsigned short OUTCKSEL : 1;
33663         unsigned short : 7;
33664         unsigned short UPLLSEL : 1;
33665         unsigned short : 3;
33666 #else
33667         unsigned short : 3;
33668         unsigned short UPLLSEL : 1;
33669         unsigned short : 7;
33670         unsigned short OUTCKSEL : 1;
33671         unsigned short : 4;
33672 #endif
33673         } BIT;
33674         } PACKCR;
33675         char      wk8[2];
33676         union {
33677             unsigned short WORD;
33678             struct {
33679
33680 #ifdef __RX_LITTLE_ENDIAN__
33681             unsigned short PPLIDIV : 2;
33682             unsigned short : 6;
33683             unsigned short PPLSTC : 6;
33684             unsigned short : 2;
33685 #else
33686             unsigned short : 2;
33687             unsigned short PPLSTC : 6;
33688             unsigned short : 6;
33689             unsigned short PPLIDIV : 2;
33690 #endif
33691             } BIT;
33692             } PPLLCR;
33693             union {
33694                 unsigned char BYTE;
33695                 struct {
33696
33697 #ifdef __RX_LITTLE_ENDIAN__
33698                 unsigned char PPLLEN : 1;
33699                 unsigned char  : 7;
33700 #else
33701                 unsigned char  : 7;
33702                 unsigned char PPLLEN : 1;
33703 #endif
33704                 } BIT;
33705                 } PPLLCR2;
33706                 union {
33707                     unsigned char BYTE;
33708                     struct {
33709
33710 #ifdef __RX_LITTLE_ENDIAN__
33711                     unsigned char PPLCK : 4;
33712                     unsigned char  : 4;
33713 #else
33714                     unsigned char : 4;
33715                     unsigned char PPLCK : 4;
33716 #endif
33717                     } BIT;
33718                     } PPLLCR3;
33719                     char      wk9[84];
33720                     union {
33721                         unsigned char BYTE;
33722                         struct {
33723
33724 #ifdef __RX_LITTLE_ENDIAN__
33725                         unsigned char OPCM : 3;
33726                         unsigned char  : 1;
33727                         unsigned char OPCMTSF : 1;
33728                         unsigned char  : 3;
33729 #else
33730                         unsigned char : 3;

```

```

33731         unsigned char OPCMTSF : 1;
33732         unsigned char : 1;
33733         unsigned char OPCM : 3;
33734     #endif
33735     } BIT;
33736     } OPCCR;
33737     union {
33738         unsigned char BYTE;
33739         struct {
33740
33741     #ifdef __RX_LITTLE_ENDIAN__
33742         unsigned char RSTCKSEL : 3;
33743         unsigned char : 4;
33744         unsigned char RSTCKEN : 1;
33745     #else
33746         unsigned char RSTCKEN : 1;
33747         unsigned char : 4;
33748         unsigned char RSTCKSEL : 3;
33749     #endif
33750     } BIT;
33751     } RSTCKCR;
33752     union {
33753         unsigned char BYTE;
33754         struct {
33755
33756     #ifdef __RX_LITTLE_ENDIAN__
33757         unsigned char MSTSEL : 8;
33758     #else
33759         unsigned char MSTSEL : 8;
33760     #endif
33761     } BIT;
33762     } MOSCWTCR;
33763     union {
33764         unsigned char BYTE;
33765         struct {
33766
33767     #ifdef __RX_LITTLE_ENDIAN__
33768         unsigned char SSTS : 8;
33769     #else
33770         unsigned char SSTS : 8;
33771     #endif
33772     } BIT;
33773     } SOSCWTCR;
33774     char wk10[28];
33775     union {
33776         unsigned char BYTE;
33777         struct {
33778
33779     #ifdef __RX_LITTLE_ENDIAN__
33780         unsigned char IWDTRF : 1;
33781         unsigned char WDTRF : 1;
33782         unsigned char SWRF : 1;
33783         unsigned char : 5;
33784     #else
33785         unsigned char : 5;
33786         unsigned char SWRF : 1;
33787         unsigned char WDTRF : 1;
33788         unsigned char IWDTRF : 1;
33789     #endif
33790     } BIT;
33791     } RSTSR2;
33792     char wk11[1];
33793     unsigned short SWRR;
33794     char wk12[28];
33795     union {
33796         unsigned char BYTE;
33797         struct {
33798
33799     #ifdef __RX_LITTLE_ENDIAN__
33800         unsigned char LVD1IDTSEL : 2;
33801         unsigned char LVD1IRQSEL : 1;
33802         unsigned char : 5;
33803     #else
33804         unsigned char : 5;
33805         unsigned char LVD1IRQSEL : 1;
33806         unsigned char LVD1IDTSEL : 2;
33807     #endif
33808     } BIT;
33809     } LVD1CR1;
33810     union {
33811         unsigned char BYTE;
33812         struct {
33813
33814     #ifdef __RX_LITTLE_ENDIAN__
33815         unsigned char LVD1DET : 1;
33816         unsigned char LVD1MON : 1;
33817         unsigned char : 6;

```

```

33818 #else
33819     unsigned char : 6;
33820     unsigned char LVD1MON : 1;
33821     unsigned char LVD1DET : 1;
33822 #endif
33823 } BIT;
33824 } LVD1SR;
33825 union {
33826     unsigned char BYTE;
33827     struct {
33828
33829 #ifdef __RX_LITTLE_ENDIAN__
33830     unsigned char LVD2IDTSEL : 2;
33831     unsigned char LVD2IRQSEL : 1;
33832     unsigned char : 5;
33833 #else
33834     unsigned char : 5;
33835     unsigned char LVD2IRQSEL : 1;
33836     unsigned char LVD2IDTSEL : 2;
33837 #endif
33838 } BIT;
33839 } LVD2CR1;
33840 union {
33841     unsigned char BYTE;
33842     struct {
33843
33844 #ifdef __RX_LITTLE_ENDIAN__
33845     unsigned char LVD2DET : 1;
33846     unsigned char LVD2MON : 1;
33847     unsigned char : 6;
33848 #else
33849     unsigned char : 6;
33850     unsigned char LVD2MON : 1;
33851     unsigned char LVD2DET : 1;
33852 #endif
33853 } BIT;
33854 } LVD2SR;
33855 char          wk13[794];
33856 union {
33857     unsigned short WORD;
33858     struct {
33859
33860 #ifdef __RX_LITTLE_ENDIAN__
33861     unsigned short PRC0 : 1;
33862     unsigned short PRC1 : 1;
33863     unsigned short : 1;
33864     unsigned short PRC3 : 1;
33865     unsigned short : 4;
33866     unsigned short PRKEY : 8;
33867 #else
33868     unsigned short PRKEY : 8;
33869     unsigned short : 4;
33870     unsigned short PRC3 : 1;
33871     unsigned short : 1;
33872     unsigned short PRC1 : 1;
33873     unsigned short PRC0 : 1;
33874 #endif
33875 } BIT;
33876 } PRCR;
33877 char          wk14[3100];
33878 union {
33879     unsigned char BYTE;
33880     struct {
33881
33882 #ifdef __RX_LITTLE_ENDIAN__
33883     unsigned char MEMWAIT : 1;
33884     unsigned char : 7;
33885 #else
33886     unsigned char : 7;
33887     unsigned char MEMWAIT : 1;
33888 #endif
33889 } BIT;
33890 } MEMWAIT;
33891 char          wk15[45667];
33892 union {
33893     unsigned char BYTE;
33894     struct {
33895
33896 #ifdef __RX_LITTLE_ENDIAN__
33897     unsigned char DEEPCUT : 2;
33898     unsigned char : 4;
33899     unsigned char IOKEEP : 1;
33900     unsigned char DPSBY : 1;
33901 #else
33902     unsigned char DPSBY : 1;
33903     unsigned char IOKEEP : 1;
33904     unsigned char : 4;

```

```

33905         unsigned char DEEPCUT : 2;
33906 #endif
33907     } BIT;
33908     } DPSBYCR;
33909     char          wk16[1];
33910     union {
33911         unsigned char BYTE;
33912         struct {
33913
33914 #ifdef __RX_LITTLE_ENDIAN__
33915         unsigned char DIRQ0E : 1;
33916         unsigned char DIRQ1E : 1;
33917         unsigned char DIRQ2E : 1;
33918         unsigned char DIRQ3E : 1;
33919         unsigned char DIRQ4E : 1;
33920         unsigned char DIRQ5E : 1;
33921         unsigned char DIRQ6E : 1;
33922         unsigned char DIRQ7E : 1;
33923 #else
33924         unsigned char DIRQ7E : 1;
33925         unsigned char DIRQ6E : 1;
33926         unsigned char DIRQ5E : 1;
33927         unsigned char DIRQ4E : 1;
33928         unsigned char DIRQ3E : 1;
33929         unsigned char DIRQ2E : 1;
33930         unsigned char DIRQ1E : 1;
33931         unsigned char DIRQ0E : 1;
33932 #endif
33933     } BIT;
33934     } DPSIER0;
33935     union {
33936         unsigned char BYTE;
33937         struct {
33938
33939 #ifdef __RX_LITTLE_ENDIAN__
33940         unsigned char DIRQ8E : 1;
33941         unsigned char DIRQ9E : 1;
33942         unsigned char DIRQ10E : 1;
33943         unsigned char DIRQ11E : 1;
33944         unsigned char DIRQ12E : 1;
33945         unsigned char DIRQ13E : 1;
33946         unsigned char DIRQ14E : 1;
33947         unsigned char DIRQ15E : 1;
33948 #else
33949         unsigned char DIRQ15E : 1;
33950         unsigned char DIRQ14E : 1;
33951         unsigned char DIRQ13E : 1;
33952         unsigned char DIRQ12E : 1;
33953         unsigned char DIRQ11E : 1;
33954         unsigned char DIRQ10E : 1;
33955         unsigned char DIRQ9E : 1;
33956         unsigned char DIRQ8E : 1;
33957 #endif
33958     } BIT;
33959     } DPSIER1;
33960     union {
33961         unsigned char BYTE;
33962         struct {
33963
33964 #ifdef __RX_LITTLE_ENDIAN__
33965         unsigned char DLVD1IE : 1;
33966         unsigned char DLVD2IE : 1;
33967         unsigned char DRTCIE : 1;
33968         unsigned char DRTCAIE : 1;
33969         unsigned char DNMIE : 1;
33970         unsigned char DRIICDIE : 1;
33971         unsigned char DRIICCIE : 1;
33972         unsigned char DUSBIE : 1;
33973 #else
33974         unsigned char DUSBIE : 1;
33975         unsigned char DRIICCIE : 1;
33976         unsigned char DRIICDIE : 1;
33977         unsigned char DNMIE : 1;
33978         unsigned char DRTCAIE : 1;
33979         unsigned char DRTCIE : 1;
33980         unsigned char DLVD2IE : 1;
33981         unsigned char DLVD1IE : 1;
33982 #endif
33983     } BIT;
33984     } DPSIER2;
33985     union {
33986         unsigned char BYTE;
33987         struct {
33988
33989 #ifdef __RX_LITTLE_ENDIAN__
33990         unsigned char DCANIE : 1;
33991         unsigned char      : 7;

```

```

33992 #else
33993     unsigned char : 7;
33994     unsigned char DCANIE : 1;
33995 #endif
33996 } BIT;
33997 } DPSIER3;
33998 union {
33999     unsigned char BYTE;
34000     struct {
34001
34002 #ifdef __RX_LITTLE_ENDIAN__
34003     unsigned char DIRQ0F : 1;
34004     unsigned char DIRQ1F : 1;
34005     unsigned char DIRQ2F : 1;
34006     unsigned char DIRQ3F : 1;
34007     unsigned char DIRQ4F : 1;
34008     unsigned char DIRQ5F : 1;
34009     unsigned char DIRQ6F : 1;
34010     unsigned char DIRQ7F : 1;
34011 #else
34012     unsigned char DIRQ7F : 1;
34013     unsigned char DIRQ6F : 1;
34014     unsigned char DIRQ5F : 1;
34015     unsigned char DIRQ4F : 1;
34016     unsigned char DIRQ3F : 1;
34017     unsigned char DIRQ2F : 1;
34018     unsigned char DIRQ1F : 1;
34019     unsigned char DIRQ0F : 1;
34020 #endif
34021 } BIT;
34022 } DPSIFR0;
34023 union {
34024     unsigned char BYTE;
34025     struct {
34026
34027 #ifdef __RX_LITTLE_ENDIAN__
34028     unsigned char DIRQ8F : 1;
34029     unsigned char DIRQ9F : 1;
34030     unsigned char DIRQ10F : 1;
34031     unsigned char DIRQ11F : 1;
34032     unsigned char DIRQ12F : 1;
34033     unsigned char DIRQ13F : 1;
34034     unsigned char DIRQ14F : 1;
34035     unsigned char DIRQ15F : 1;
34036 #else
34037     unsigned char DIRQ15F : 1;
34038     unsigned char DIRQ14F : 1;
34039     unsigned char DIRQ13F : 1;
34040     unsigned char DIRQ12F : 1;
34041     unsigned char DIRQ11F : 1;
34042     unsigned char DIRQ10F : 1;
34043     unsigned char DIRQ9F : 1;
34044     unsigned char DIRQ8F : 1;
34045 #endif
34046 } BIT;
34047 } DPSIFR1;
34048 union {
34049     unsigned char BYTE;
34050     struct {
34051
34052 #ifdef __RX_LITTLE_ENDIAN__
34053     unsigned char DLVD11F : 1;
34054     unsigned char DLVD21F : 1;
34055     unsigned char DRTCIIF : 1;
34056     unsigned char DRTCAIF : 1;
34057     unsigned char DNMIF : 1;
34058     unsigned char DRIICDIF : 1;
34059     unsigned char DRIICCIF : 1;
34060     unsigned char DUSBIF : 1;
34061 #else
34062     unsigned char DUSBIF : 1;
34063     unsigned char DRIICCIF : 1;
34064     unsigned char DRIICDIF : 1;
34065     unsigned char DNMIF : 1;
34066     unsigned char DRTCAIF : 1;
34067     unsigned char DRTCIIF : 1;
34068     unsigned char DLVD21F : 1;
34069     unsigned char DLVD11F : 1;
34070 #endif
34071 } BIT;
34072 } DPSIFR2;
34073 union {
34074     unsigned char BYTE;
34075     struct {
34076
34077 #ifdef __RX_LITTLE_ENDIAN__
34078     unsigned char DCANIF : 1;

```

```

34079         unsigned char : 7;
34080 #else
34081         unsigned char : 7;
34082         unsigned char DCANIF : 1;
34083 #endif
34084     } BIT;
34085     } DPSIFR3;
34086     union {
34087         unsigned char BYTE;
34088         struct {
34089
34090 #ifdef __RX_LITTLE_ENDIAN__
34091         unsigned char DIRQ0EG : 1;
34092         unsigned char DIRQ1EG : 1;
34093         unsigned char DIRQ2EG : 1;
34094         unsigned char DIRQ3EG : 1;
34095         unsigned char DIRQ4EG : 1;
34096         unsigned char DIRQ5EG : 1;
34097         unsigned char DIRQ6EG : 1;
34098         unsigned char DIRQ7EG : 1;
34099 #else
34100         unsigned char DIRQ7EG : 1;
34101         unsigned char DIRQ6EG : 1;
34102         unsigned char DIRQ5EG : 1;
34103         unsigned char DIRQ4EG : 1;
34104         unsigned char DIRQ3EG : 1;
34105         unsigned char DIRQ2EG : 1;
34106         unsigned char DIRQ1EG : 1;
34107         unsigned char DIRQ0EG : 1;
34108 #endif
34109     } BIT;
34110     } DPSIEGR0;
34111     union {
34112         unsigned char BYTE;
34113         struct {
34114
34115 #ifdef __RX_LITTLE_ENDIAN__
34116         unsigned char DIRQ8EG : 1;
34117         unsigned char DIRQ9EG : 1;
34118         unsigned char DIRQ10EG : 1;
34119         unsigned char DIRQ11EG : 1;
34120         unsigned char DIRQ12EG : 1;
34121         unsigned char DIRQ13EG : 1;
34122         unsigned char DIRQ14EG : 1;
34123         unsigned char DIRQ15EG : 1;
34124 #else
34125         unsigned char DIRQ15EG : 1;
34126         unsigned char DIRQ14EG : 1;
34127         unsigned char DIRQ13EG : 1;
34128         unsigned char DIRQ12EG : 1;
34129         unsigned char DIRQ11EG : 1;
34130         unsigned char DIRQ10EG : 1;
34131         unsigned char DIRQ9EG : 1;
34132         unsigned char DIRQ8EG : 1;
34133 #endif
34134     } BIT;
34135     } DPSIEGR1;
34136     union {
34137         unsigned char BYTE;
34138         struct {
34139
34140 #ifdef __RX_LITTLE_ENDIAN__
34141         unsigned char DLVD1EG : 1;
34142         unsigned char DLVD2EG : 1;
34143         unsigned char : 2;
34144         unsigned char DNMIEG : 1;
34145         unsigned char DRIICDEG : 1;
34146         unsigned char DRIICCEG : 1;
34147         unsigned char : 1;
34148 #else
34149         unsigned char : 1;
34150         unsigned char DRIICCEG : 1;
34151         unsigned char DRIICDEG : 1;
34152         unsigned char DNMIEG : 1;
34153         unsigned char : 2;
34154         unsigned char DLVD2EG : 1;
34155         unsigned char DLVD1EG : 1;
34156 #endif
34157     } BIT;
34158     } DPSIEGR2;
34159     union {
34160         unsigned char BYTE;
34161         struct {
34162
34163 #ifdef __RX_LITTLE_ENDIAN__
34164         unsigned char DCANIEG : 1;
34165         unsigned char : 7;

```

```

34166 #else
34167     unsigned char : 7;
34168     unsigned char DCANIEG : 1;
34169 #endif
34170 } BIT;
34171 } DPSIEGR3;
34172 char      wk17[2];
34173 union {
34174     unsigned char BYTE;
34175     struct {
34176
34177 #ifdef __RX_LITTLE_ENDIAN__
34178     unsigned char PORF : 1;
34179     unsigned char LVD0RF : 1;
34180     unsigned char LVD1RF : 1;
34181     unsigned char LVD2RF : 1;
34182     unsigned char : 3;
34183     unsigned char DPSRSTF : 1;
34184 #else
34185     unsigned char DPSRSTF : 1;
34186     unsigned char : 3;
34187     unsigned char LVD2RF : 1;
34188     unsigned char LVD1RF : 1;
34189     unsigned char LVD0RF : 1;
34190     unsigned char PORF : 1;
34191 #endif
34192 } BIT;
34193 } RSTSR0;
34194 union {
34195     unsigned char BYTE;
34196     struct {
34197
34198 #ifdef __RX_LITTLE_ENDIAN__
34199     unsigned char CWSF : 1;
34200     unsigned char : 7;
34201 #else
34202     unsigned char : 7;
34203     unsigned char CWSF : 1;
34204 #endif
34205 } BIT;
34206 } RSTSR1;
34207 char      wk18[1];
34208 union {
34209     unsigned char BYTE;
34210     struct {
34211
34212 #ifdef __RX_LITTLE_ENDIAN__
34213     unsigned char MOFXIN : 1;
34214     unsigned char : 3;
34215     unsigned char MODRV2 : 2;
34216     unsigned char MOSEL : 1;
34217     unsigned char : 1;
34218 #else
34219     unsigned char : 1;
34220     unsigned char MOSEL : 1;
34221     unsigned char MODRV2 : 2;
34222     unsigned char : 3;
34223     unsigned char MOFXIN : 1;
34224 #endif
34225 } BIT;
34226 } MOFCR;
34227 union {
34228     unsigned char BYTE;
34229     struct {
34230
34231 #ifdef __RX_LITTLE_ENDIAN__
34232     unsigned char HOCPCNT : 1;
34233     unsigned char : 7;
34234 #else
34235     unsigned char : 7;
34236     unsigned char HOCPCNT : 1;
34237 #endif
34238 } BIT;
34239 } HOCOPCR;
34240 char      wk19[2];
34241 union {
34242     unsigned char BYTE;
34243     struct {
34244
34245 #ifdef __RX_LITTLE_ENDIAN__
34246     unsigned char : 5;
34247     unsigned char LVD1E : 1;
34248     unsigned char LVD2E : 1;
34249     unsigned char : 1;
34250 #else
34251     unsigned char : 1;
34252     unsigned char LVD2E : 1;

```

```

34253         unsigned char LVD1E : 1;
34254         unsigned char : 5;
34255     #endif
34256     } BIT;
34257     } LVCMPCR;
34258     union {
34259         unsigned char BYTE;
34260     struct {
34261
34262     #ifdef __RX_LITTLE_ENDIAN__
34263         unsigned char LVD1LVL : 4;
34264         unsigned char LVD2LVL : 4;
34265     #else
34266         unsigned char LVD2LVL : 4;
34267         unsigned char LVD1LVL : 4;
34268     #endif
34269     } BIT;
34270     } LVDLVL;
34271     char wk20[1];
34272     union {
34273         unsigned char BYTE;
34274     struct {
34275
34276     #ifdef __RX_LITTLE_ENDIAN__
34277         unsigned char LVD1RIE : 1;
34278         unsigned char LVD1DFDIS : 1;
34279         unsigned char LVD1CMPE : 1;
34280         unsigned char : 1;
34281         unsigned char LVD1FSAMP : 2;
34282         unsigned char LVD1RI : 1;
34283         unsigned char LVD1RN : 1;
34284     #else
34285         unsigned char LVD1RN : 1;
34286         unsigned char LVD1RI : 1;
34287         unsigned char LVD1FSAMP : 2;
34288         unsigned char : 1;
34289         unsigned char LVD1CMPE : 1;
34290         unsigned char LVD1DFDIS : 1;
34291         unsigned char LVD1RIE : 1;
34292     #endif
34293     } BIT;
34294     } LVD1CR0;
34295     union {
34296         unsigned char BYTE;
34297     struct {
34298
34299     #ifdef __RX_LITTLE_ENDIAN__
34300         unsigned char LVD2RIE : 1;
34301         unsigned char LVD2DFDIS : 1;
34302         unsigned char LVD2CMPE : 1;
34303         unsigned char : 1;
34304         unsigned char LVD2FSAMP : 2;
34305         unsigned char LVD2RI : 1;
34306         unsigned char LVD2RN : 1;
34307     #else
34308         unsigned char LVD2RN : 1;
34309         unsigned char LVD2RI : 1;
34310         unsigned char LVD2FSAMP : 2;
34311         unsigned char : 1;
34312         unsigned char LVD2CMPE : 1;
34313         unsigned char LVD2DFDIS : 1;
34314         unsigned char LVD2RIE : 1;
34315     #endif
34316     } BIT;
34317     } LVD2CR0;
34318     char wk21[4];
34319     unsigned char DPSBKR[32];
34320 } st_system_t;
34321
34322 typedef struct st_temps {
34323     union {
34324         unsigned char BYTE;
34325     struct {
34326
34327     #ifdef __RX_LITTLE_ENDIAN__
34328         unsigned char : 4;
34329         unsigned char TSOE : 1;
34330         unsigned char : 2;
34331         unsigned char TSEN : 1;
34332     #else
34333         unsigned char TSEN : 1;
34334         unsigned char : 2;
34335         unsigned char TSOE : 1;
34336         unsigned char : 4;
34337     #endif
34338     } BIT;
34339     } TSCR;

```

```

34340 } st_temps_t;
34341
34342 typedef struct st_tmr0 {
34343     union {
34344         unsigned char BYTE;
34345         struct {
34346
34347 #ifdef __RX_LITTLE_ENDIAN__
34348         unsigned char : 3;
34349         unsigned char CCLR : 2;
34350         unsigned char OVIE : 1;
34351         unsigned char CMIEA : 1;
34352         unsigned char CMIEB : 1;
34353 #else
34354         unsigned char CMIEB : 1;
34355         unsigned char CMIEA : 1;
34356         unsigned char OVIE : 1;
34357         unsigned char CCLR : 2;
34358         unsigned char : 3;
34359 #endif
34360     } BIT;
34361     } TCR;
34362     char wk0[1];
34363     union {
34364         unsigned char BYTE;
34365         struct {
34366
34367 #ifdef __RX_LITTLE_ENDIAN__
34368         unsigned char OSA : 2;
34369         unsigned char OSB : 2;
34370         unsigned char ADTE : 1;
34371         unsigned char : 3;
34372 #else
34373         unsigned char : 3;
34374         unsigned char ADTE : 1;
34375         unsigned char OSB : 2;
34376         unsigned char OSA : 2;
34377 #endif
34378     } BIT;
34379     } TCSR;
34380     char wk1[1];
34381     unsigned char TCORA;
34382     char wk2[1];
34383     unsigned char TCORB;
34384     char wk3[1];
34385     unsigned char TCNT;
34386     char wk4[1];
34387     union {
34388         unsigned char BYTE;
34389         struct {
34390
34391 #ifdef __RX_LITTLE_ENDIAN__
34392         unsigned char CKS : 3;
34393         unsigned char CSS : 2;
34394         unsigned char : 2;
34395         unsigned char TMRIS : 1;
34396 #else
34397         unsigned char TMRIS : 1;
34398         unsigned char : 2;
34399         unsigned char CSS : 2;
34400         unsigned char CKS : 3;
34401 #endif
34402     } BIT;
34403     } TCCR;
34404     char wk5[1];
34405     union {
34406         unsigned char BYTE;
34407         struct {
34408
34409 #ifdef __RX_LITTLE_ENDIAN__
34410         unsigned char TCS : 1;
34411         unsigned char : 7;
34412 #else
34413         unsigned char : 7;
34414         unsigned char TCS : 1;
34415 #endif
34416     } BIT;
34417     } TCSTR;
34418 } st_tmr0_t;
34419
34420 typedef struct st_tmr1 {
34421     union {
34422         unsigned char BYTE;
34423         struct {
34424
34425 #ifdef __RX_LITTLE_ENDIAN__
34426         unsigned char : 3;

```

```

34427         unsigned char CCLR : 2;
34428         unsigned char OVIE : 1;
34429         unsigned char CMIEA : 1;
34430         unsigned char CMIEB : 1;
34431     #else
34432         unsigned char CMIEB : 1;
34433         unsigned char CMIEA : 1;
34434         unsigned char OVIE : 1;
34435         unsigned char CCLR : 2;
34436         unsigned char : 3;
34437     #endif
34438     } BIT;
34439     } TCR;
34440     char          wk0[1];
34441     union {
34442         unsigned char BYTE;
34443         struct {
34444
34445     #ifdef __RX_LITTLE_ENDIAN__
34446         unsigned char OSA : 2;
34447         unsigned char OSB : 2;
34448         unsigned char : 4;
34449     #else
34450         unsigned char : 4;
34451         unsigned char OSB : 2;
34452         unsigned char OSA : 2;
34453     #endif
34454     } BIT;
34455     } TCSR;
34456     char          wk1[1];
34457     unsigned char TCORA;
34458     char          wk2[1];
34459     unsigned char TCORB;
34460     char          wk3[1];
34461     unsigned char TCNT;
34462     char          wk4[1];
34463     union {
34464         unsigned char BYTE;
34465         struct {
34466
34467     #ifdef __RX_LITTLE_ENDIAN__
34468         unsigned char CKS : 3;
34469         unsigned char CSS : 2;
34470         unsigned char : 2;
34471         unsigned char TMRIS : 1;
34472     #else
34473         unsigned char TMRIS : 1;
34474         unsigned char : 2;
34475         unsigned char CSS : 2;
34476         unsigned char CKS : 3;
34477     #endif
34478     } BIT;
34479     } TCCR;
34480     char          wk5[1];
34481     union {
34482         unsigned char BYTE;
34483         struct {
34484
34485     #ifdef __RX_LITTLE_ENDIAN__
34486         unsigned char TCS : 1;
34487         unsigned char : 7;
34488     #else
34489         unsigned char : 7;
34490         unsigned char TCS : 1;
34491     #endif
34492     } BIT;
34493     } TCSTR;
34494 } st_tmr1_t;
34495
34496 typedef struct st_tmr01 {
34497     unsigned short TCORA;
34498     unsigned short TCORB;
34499     unsigned short TCNT;
34500     unsigned short TCCR;
34501 } st_tmr01_t;
34502
34503 typedef struct st_tpu0 {
34504     union {
34505         unsigned char BYTE;
34506         struct {
34507
34508     #ifdef __RX_LITTLE_ENDIAN__
34509         unsigned char NFAEN : 1;
34510         unsigned char NFBEN : 1;
34511         unsigned char NFCEN : 1;
34512         unsigned char NFDEN : 1;
34513         unsigned char NFCS : 2;

```

```

34514         unsigned char : 2;
34515 #else
34516         unsigned char : 2;
34517         unsigned char NFCS : 2;
34518         unsigned char NFDEN : 1;
34519         unsigned char NFCEN : 1;
34520         unsigned char NFBEN : 1;
34521         unsigned char NFAEN : 1;
34522 #endif
34523     } BIT;
34524     } NFCR;
34525     char          wk0[7];
34526     union {
34527         unsigned char BYTE;
34528         struct {
34529
34530 #ifdef __RX_LITTLE_ENDIAN__
34531         unsigned char TPSC : 3;
34532         unsigned char CKEG : 2;
34533         unsigned char CCLR : 3;
34534 #else
34535         unsigned char CCLR : 3;
34536         unsigned char CKEG : 2;
34537         unsigned char TPSC : 3;
34538 #endif
34539     } BIT;
34540     } TCR;
34541     union {
34542         unsigned char BYTE;
34543         struct {
34544
34545 #ifdef __RX_LITTLE_ENDIAN__
34546         unsigned char MD : 4;
34547         unsigned char BFA : 1;
34548         unsigned char BFB : 1;
34549         unsigned char ICSELB : 1;
34550         unsigned char ICSELD : 1;
34551 #else
34552         unsigned char ICSELD : 1;
34553         unsigned char ICSELB : 1;
34554         unsigned char BFB : 1;
34555         unsigned char BFA : 1;
34556         unsigned char MD : 4;
34557 #endif
34558     } BIT;
34559     } TMDR;
34560     union {
34561         unsigned char BYTE;
34562         struct {
34563
34564 #ifdef __RX_LITTLE_ENDIAN__
34565         unsigned char IOA : 4;
34566         unsigned char IOB : 4;
34567 #else
34568         unsigned char IOB : 4;
34569         unsigned char IOA : 4;
34570 #endif
34571     } BIT;
34572     } TIORH;
34573     union {
34574         unsigned char BYTE;
34575         struct {
34576
34577 #ifdef __RX_LITTLE_ENDIAN__
34578         unsigned char IOC : 4;
34579         unsigned char IOD : 4;
34580 #else
34581         unsigned char IOD : 4;
34582         unsigned char IOC : 4;
34583 #endif
34584     } BIT;
34585     } TIORL;
34586     union {
34587         unsigned char BYTE;
34588         struct {
34589
34590 #ifdef __RX_LITTLE_ENDIAN__
34591         unsigned char TGIEA : 1;
34592         unsigned char TGIEB : 1;
34593         unsigned char TGIEC : 1;
34594         unsigned char TGIED : 1;
34595         unsigned char TCIEV : 1;
34596         unsigned char : 2;
34597         unsigned char TTGE : 1;
34598 #else
34599         unsigned char TTGE : 1;
34600         unsigned char : 2;

```

```

34601         unsigned char TCIEV : 1;
34602         unsigned char TGIED : 1;
34603         unsigned char TGIEC : 1;
34604         unsigned char TGIEB : 1;
34605         unsigned char TGIEA : 1;
34606     #endif
34607     } BIT;
34608     } TIER;
34609     union {
34610         unsigned char BYTE;
34611         struct {
34612
34613     #ifdef __RX_LITTLE_ENDIAN__
34614         unsigned char TGFA : 1;
34615         unsigned char TGFB : 1;
34616         unsigned char TGFC : 1;
34617         unsigned char TGFD : 1;
34618         unsigned char TCFV : 1;
34619         unsigned char : 3;
34620     #else
34621         unsigned char : 3;
34622         unsigned char TCFV : 1;
34623         unsigned char TGFD : 1;
34624         unsigned char TGFC : 1;
34625         unsigned char TGFB : 1;
34626         unsigned char TGFA : 1;
34627     #endif
34628     } BIT;
34629     } TSR;
34630     unsigned short TCNT;
34631     unsigned short TGRA;
34632     unsigned short TGRB;
34633     unsigned short TGRC;
34634     unsigned short TGRD;
34635 } st_tpu0_t;
34636
34637 typedef struct st_tpu1 {
34638     char          wk0[1];
34639     union {
34640         unsigned char BYTE;
34641         struct {
34642
34643     #ifdef __RX_LITTLE_ENDIAN__
34644         unsigned char NFAEN : 1;
34645         unsigned char NFBEN : 1;
34646         unsigned char : 2;
34647         unsigned char NFCS : 2;
34648         unsigned char : 2;
34649     #else
34650         unsigned char : 2;
34651         unsigned char NFCS : 2;
34652         unsigned char : 2;
34653         unsigned char NFBEN : 1;
34654         unsigned char NFAEN : 1;
34655     #endif
34656     } BIT;
34657     } NFCR;
34658     char          wk1[22];
34659     union {
34660         unsigned char BYTE;
34661         struct {
34662
34663     #ifdef __RX_LITTLE_ENDIAN__
34664         unsigned char TPSC : 3;
34665         unsigned char CKEG : 2;
34666         unsigned char CCLR : 2;
34667         unsigned char : 1;
34668     #else
34669         unsigned char : 1;
34670         unsigned char CCLR : 2;
34671         unsigned char CKEG : 2;
34672         unsigned char TPSC : 3;
34673     #endif
34674     } BIT;
34675     } TCR;
34676     union {
34677         unsigned char BYTE;
34678         struct {
34679
34680     #ifdef __RX_LITTLE_ENDIAN__
34681         unsigned char MD : 4;
34682         unsigned char : 2;
34683         unsigned char ICSELB : 1;
34684         unsigned char : 1;
34685     #else
34686         unsigned char : 1;
34687         unsigned char ICSELB : 1;

```

```

34688         unsigned char : 2;
34689         unsigned char MD : 4;
34690 #endif
34691     } BIT;
34692     } TMDR;
34693     union {
34694         unsigned char BYTE;
34695         struct {
34696
34697 #ifdef __RX_LITTLE_ENDIAN__
34698         unsigned char IOA : 4;
34699         unsigned char IOB : 4;
34700 #else
34701         unsigned char IOB : 4;
34702         unsigned char IOA : 4;
34703 #endif
34704     } BIT;
34705     } TIOR;
34706     char          wk2[1];
34707     union {
34708         unsigned char BYTE;
34709         struct {
34710
34711 #ifdef __RX_LITTLE_ENDIAN__
34712         unsigned char TGIEA : 1;
34713         unsigned char TGIEB : 1;
34714         unsigned char : 2;
34715         unsigned char TCIEV : 1;
34716         unsigned char TCIEU : 1;
34717         unsigned char : 1;
34718         unsigned char TTGE : 1;
34719 #else
34720         unsigned char TTGE : 1;
34721         unsigned char : 1;
34722         unsigned char TCIEU : 1;
34723         unsigned char TCIEV : 1;
34724         unsigned char : 2;
34725         unsigned char TGIEB : 1;
34726         unsigned char TGIEA : 1;
34727 #endif
34728     } BIT;
34729     } TIER;
34730     union {
34731         unsigned char BYTE;
34732         struct {
34733
34734 #ifdef __RX_LITTLE_ENDIAN__
34735         unsigned char TGFA : 1;
34736         unsigned char TGFB : 1;
34737         unsigned char : 2;
34738         unsigned char TCFV : 1;
34739         unsigned char TCFU : 1;
34740         unsigned char : 1;
34741         unsigned char TCFD : 1;
34742 #else
34743         unsigned char TCFD : 1;
34744         unsigned char : 1;
34745         unsigned char TCFU : 1;
34746         unsigned char TCFV : 1;
34747         unsigned char : 2;
34748         unsigned char TGFB : 1;
34749         unsigned char TGFA : 1;
34750 #endif
34751     } BIT;
34752     } TSR;
34753     unsigned short TCNT;
34754     unsigned short TGRA;
34755     unsigned short TGRB;
34756 } st_tpu1_t;
34757
34758 typedef struct st_tpu2 {
34759     union {
34760         unsigned char BYTE;
34761         struct {
34762
34763 #ifdef __RX_LITTLE_ENDIAN__
34764         unsigned char NFAEN : 1;
34765         unsigned char NFBEN : 1;
34766         unsigned char : 2;
34767         unsigned char NFCS : 2;
34768         unsigned char : 2;
34769 #else
34770         unsigned char : 2;
34771         unsigned char NFCS : 2;
34772         unsigned char : 2;
34773         unsigned char NFBEN : 1;
34774         unsigned char NFAEN : 1;

```

```

34775 #endif
34776     } BIT;
34777     } NFCR;
34778     char          wk0[37];
34779     union {
34780         unsigned char BYTE;
34781         struct {
34782
34783 #ifdef __RX_LITTLE_ENDIAN__
34784         unsigned char TPSC : 3;
34785         unsigned char CKEG : 2;
34786         unsigned char CCLR : 2;
34787         unsigned char : 1;
34788 #else
34789         unsigned char : 1;
34790         unsigned char CCLR : 2;
34791         unsigned char CKEG : 2;
34792         unsigned char TPSC : 3;
34793 #endif
34794     } BIT;
34795     } TCR;
34796     union {
34797         unsigned char BYTE;
34798         struct {
34799
34800 #ifdef __RX_LITTLE_ENDIAN__
34801         unsigned char MD : 4;
34802         unsigned char : 2;
34803         unsigned char ICSELB : 1;
34804         unsigned char : 1;
34805 #else
34806         unsigned char : 1;
34807         unsigned char ICSELB : 1;
34808         unsigned char : 2;
34809         unsigned char MD : 4;
34810 #endif
34811     } BIT;
34812     } TMDR;
34813     union {
34814         unsigned char BYTE;
34815         struct {
34816
34817 #ifdef __RX_LITTLE_ENDIAN__
34818         unsigned char IOA : 4;
34819         unsigned char IOB : 4;
34820 #else
34821         unsigned char IOB : 4;
34822         unsigned char IOA : 4;
34823 #endif
34824     } BIT;
34825     } TIOR;
34826     char          wk1[1];
34827     union {
34828         unsigned char BYTE;
34829         struct {
34830
34831 #ifdef __RX_LITTLE_ENDIAN__
34832         unsigned char TGIEA : 1;
34833         unsigned char TGIEB : 1;
34834         unsigned char : 2;
34835         unsigned char TCIEV : 1;
34836         unsigned char TCIEU : 1;
34837         unsigned char : 1;
34838         unsigned char TTGE : 1;
34839 #else
34840         unsigned char TTGE : 1;
34841         unsigned char : 1;
34842         unsigned char TCIEU : 1;
34843         unsigned char TCIEV : 1;
34844         unsigned char : 2;
34845         unsigned char TGIEB : 1;
34846         unsigned char TGIEA : 1;
34847 #endif
34848     } BIT;
34849     } TIER;
34850     union {
34851         unsigned char BYTE;
34852         struct {
34853
34854 #ifdef __RX_LITTLE_ENDIAN__
34855         unsigned char TGFA : 1;
34856         unsigned char TGFB : 1;
34857         unsigned char : 2;
34858         unsigned char TCFV : 1;
34859         unsigned char TCFU : 1;
34860         unsigned char : 1;
34861         unsigned char TCFD : 1;

```

```

34862 #else
34863     unsigned char TCFD : 1;
34864     unsigned char : 1;
34865     unsigned char TCFU : 1;
34866     unsigned char TCFV : 1;
34867     unsigned char : 2;
34868     unsigned char TGFB : 1;
34869     unsigned char TGFA : 1;
34870 #endif
34871     } BIT;
34872     } TSR;
34873     unsigned short TCNT;
34874     unsigned short TGRA;
34875     unsigned short TGRB;
34876 } st_tpu2_t;
34877
34878 typedef struct st_tpu3 {
34879     char          wk0[1];
34880     union {
34881         unsigned char BYTE;
34882         struct {
34883
34884 #ifdef __RX_LITTLE_ENDIAN__
34885         unsigned char NFAEN : 1;
34886         unsigned char NFBEN : 1;
34887         unsigned char NFCEN : 1;
34888         unsigned char NFDEN : 1;
34889         unsigned char NFCS : 2;
34890         unsigned char : 2;
34891 #else
34892         unsigned char : 2;
34893         unsigned char NFCS : 2;
34894         unsigned char NFDEN : 1;
34895         unsigned char NFCEN : 1;
34896         unsigned char NFBEN : 1;
34897         unsigned char NFAEN : 1;
34898 #endif
34899     } BIT;
34900     } NFCR;
34901     char          wk1[52];
34902     union {
34903         unsigned char BYTE;
34904         struct {
34905
34906 #ifdef __RX_LITTLE_ENDIAN__
34907         unsigned char TPSC : 3;
34908         unsigned char CKEG : 2;
34909         unsigned char CCLR : 3;
34910 #else
34911         unsigned char CCLR : 3;
34912         unsigned char CKEG : 2;
34913         unsigned char TPSC : 3;
34914 #endif
34915     } BIT;
34916     } TCR;
34917     union {
34918         unsigned char BYTE;
34919         struct {
34920
34921 #ifdef __RX_LITTLE_ENDIAN__
34922         unsigned char MD : 4;
34923         unsigned char BFA : 1;
34924         unsigned char BFB : 1;
34925         unsigned char ICSELB : 1;
34926         unsigned char ICSELD : 1;
34927 #else
34928         unsigned char ICSELD : 1;
34929         unsigned char ICSELB : 1;
34930         unsigned char BFB : 1;
34931         unsigned char BFA : 1;
34932         unsigned char MD : 4;
34933 #endif
34934     } BIT;
34935     } TMDR;
34936     union {
34937         unsigned char BYTE;
34938         struct {
34939
34940 #ifdef __RX_LITTLE_ENDIAN__
34941         unsigned char IOA : 4;
34942         unsigned char IOB : 4;
34943 #else
34944         unsigned char IOB : 4;
34945         unsigned char IOA : 4;
34946 #endif
34947     } BIT;
34948     } TIORH;

```

```

34949     union {
34950         unsigned char BYTE;
34951         struct {
34952
34953 #ifdef __RX_LITTLE_ENDIAN__
34954         unsigned char IOC : 4;
34955         unsigned char IOD : 4;
34956 #else
34957         unsigned char IOD : 4;
34958         unsigned char IOC : 4;
34959 #endif
34960     } BIT;
34961     } TIORL;
34962     union {
34963         unsigned char BYTE;
34964         struct {
34965
34966 #ifdef __RX_LITTLE_ENDIAN__
34967         unsigned char TGIEA : 1;
34968         unsigned char TGIEB : 1;
34969         unsigned char TGIEC : 1;
34970         unsigned char TGIED : 1;
34971         unsigned char TCIEV : 1;
34972         unsigned char   : 2;
34973         unsigned char TTGE : 1;
34974 #else
34975         unsigned char TTGE : 1;
34976         unsigned char   : 2;
34977         unsigned char TCIEV : 1;
34978         unsigned char TGIED : 1;
34979         unsigned char TGIEC : 1;
34980         unsigned char TGIEB : 1;
34981         unsigned char TGIEA : 1;
34982 #endif
34983     } BIT;
34984     } TIER;
34985     union {
34986         unsigned char BYTE;
34987         struct {
34988
34989 #ifdef __RX_LITTLE_ENDIAN__
34990         unsigned char TGFA : 1;
34991         unsigned char TGFB : 1;
34992         unsigned char TGFC : 1;
34993         unsigned char TGFD : 1;
34994         unsigned char TCFV : 1;
34995         unsigned char   : 3;
34996 #else
34997         unsigned char   : 3;
34998         unsigned char TCFV : 1;
34999         unsigned char TGFD : 1;
35000         unsigned char TGFC : 1;
35001         unsigned char TGFB : 1;
35002         unsigned char TGFA : 1;
35003 #endif
35004     } BIT;
35005     } TSR;
35006     unsigned short TCNT;
35007     unsigned short TGRA;
35008     unsigned short TGRB;
35009     unsigned short TGRC;
35010     unsigned short TGRD;
35011 } st_tpu3_t;
35012
35013 typedef struct st_tpu4 {
35014     union {
35015         unsigned char BYTE;
35016         struct {
35017
35018 #ifdef __RX_LITTLE_ENDIAN__
35019         unsigned char NFAEN : 1;
35020         unsigned char NFBEN : 1;
35021         unsigned char   : 2;
35022         unsigned char NFCS : 2;
35023         unsigned char   : 2;
35024 #else
35025         unsigned char   : 2;
35026         unsigned char NFCS : 2;
35027         unsigned char   : 2;
35028         unsigned char NFBEN : 1;
35029         unsigned char NFAEN : 1;
35030 #endif
35031     } BIT;
35032     } NFCR;
35033     char          wk0[67];
35034     union {
35035         unsigned char BYTE;

```

```

35036     struct {
35037
35038 #ifdef __RX_LITTLE_ENDIAN__
35039     unsigned char TPSC : 3;
35040     unsigned char CKEG : 2;
35041     unsigned char CCLR : 2;
35042     unsigned char : 1;
35043 #else
35044     unsigned char : 1;
35045     unsigned char CCLR : 2;
35046     unsigned char CKEG : 2;
35047     unsigned char TPSC : 3;
35048 #endif
35049     } BIT;
35050     } TCR;
35051     union {
35052         unsigned char BYTE;
35053         struct {
35054
35055 #ifdef __RX_LITTLE_ENDIAN__
35056         unsigned char MD : 4;
35057         unsigned char : 2;
35058         unsigned char ICSELB : 1;
35059         unsigned char : 1;
35060 #else
35061         unsigned char : 1;
35062         unsigned char ICSELB : 1;
35063         unsigned char : 2;
35064         unsigned char MD : 4;
35065 #endif
35066         } BIT;
35067         } TMDR;
35068         union {
35069             unsigned char BYTE;
35070             struct {
35071
35072 #ifdef __RX_LITTLE_ENDIAN__
35073             unsigned char IOA : 4;
35074             unsigned char IOB : 4;
35075 #else
35076             unsigned char IOB : 4;
35077             unsigned char IOA : 4;
35078 #endif
35079             } BIT;
35080             } TIOR;
35081             char          wk1[1];
35082             union {
35083                 unsigned char BYTE;
35084                 struct {
35085
35086 #ifdef __RX_LITTLE_ENDIAN__
35087                 unsigned char TGIEA : 1;
35088                 unsigned char TGIEB : 1;
35089                 unsigned char : 2;
35090                 unsigned char TCIEV : 1;
35091                 unsigned char TCIEU : 1;
35092                 unsigned char : 1;
35093                 unsigned char TTGE : 1;
35094 #else
35095                 unsigned char TTGE : 1;
35096                 unsigned char : 1;
35097                 unsigned char TCIEU : 1;
35098                 unsigned char TCIEV : 1;
35099                 unsigned char : 2;
35100                 unsigned char TGIEB : 1;
35101                 unsigned char TGIEA : 1;
35102 #endif
35103                 } BIT;
35104                 } TIER;
35105                 union {
35106                     unsigned char BYTE;
35107                     struct {
35108
35109 #ifdef __RX_LITTLE_ENDIAN__
35110                     unsigned char TGFA : 1;
35111                     unsigned char TGFB : 1;
35112                     unsigned char : 2;
35113                     unsigned char TCFV : 1;
35114                     unsigned char TCFU : 1;
35115                     unsigned char : 1;
35116                     unsigned char TCFD : 1;
35117 #else
35118                     unsigned char TCFD : 1;
35119                     unsigned char : 1;
35120                     unsigned char TCFU : 1;
35121                     unsigned char TCFV : 1;
35122                     unsigned char : 2;

```

```

35123         unsigned char TGFB : 1;
35124         unsigned char TGFA : 1;
35125     #endif
35126     } BIT;
35127     } TSR;
35128     unsigned short TCNT;
35129     unsigned short TGRA;
35130     unsigned short TGRB;
35131 } st_tpu4_t;
35132
35133 typedef struct st_tpu5 {
35134     char          wk0[1];
35135     union {
35136         unsigned char BYTE;
35137         struct {
35138
35139 #ifdef __RX_LITTLE_ENDIAN__
35140         unsigned char NFAEN : 1;
35141         unsigned char NFBEN : 1;
35142         unsigned char  : 2;
35143         unsigned char NFCS : 2;
35144         unsigned char  : 2;
35145 #else
35146         unsigned char  : 2;
35147         unsigned char NFCS : 2;
35148         unsigned char  : 2;
35149         unsigned char NFBEN : 1;
35150         unsigned char NFAEN : 1;
35151 #endif
35152     } BIT;
35153     } NFCR;
35154     char          wk1[82];
35155     union {
35156         unsigned char BYTE;
35157         struct {
35158
35159 #ifdef __RX_LITTLE_ENDIAN__
35160         unsigned char TPSC : 3;
35161         unsigned char CKEG : 2;
35162         unsigned char CCLR : 2;
35163         unsigned char  : 1;
35164 #else
35165         unsigned char  : 1;
35166         unsigned char CCLR : 2;
35167         unsigned char CKEG : 2;
35168         unsigned char TPSC : 3;
35169 #endif
35170     } BIT;
35171     } TCR;
35172     union {
35173         unsigned char BYTE;
35174         struct {
35175
35176 #ifdef __RX_LITTLE_ENDIAN__
35177         unsigned char MD : 4;
35178         unsigned char  : 2;
35179         unsigned char ICSELB : 1;
35180         unsigned char  : 1;
35181 #else
35182         unsigned char  : 1;
35183         unsigned char ICSELB : 1;
35184         unsigned char  : 2;
35185         unsigned char MD : 4;
35186 #endif
35187     } BIT;
35188     } TMDR;
35189     union {
35190         unsigned char BYTE;
35191         struct {
35192
35193 #ifdef __RX_LITTLE_ENDIAN__
35194         unsigned char IOA : 4;
35195         unsigned char IOB : 4;
35196 #else
35197         unsigned char IOB : 4;
35198         unsigned char IOA : 4;
35199 #endif
35200     } BIT;
35201     } TIOR;
35202     char          wk2[1];
35203     union {
35204         unsigned char BYTE;
35205         struct {
35206
35207 #ifdef __RX_LITTLE_ENDIAN__
35208         unsigned char TGIEA : 1;
35209         unsigned char TGIEB : 1;

```

```

35210         unsigned char : 2;
35211         unsigned char TCIEV : 1;
35212         unsigned char TCIEU : 1;
35213         unsigned char : 2;
35214 #else
35215         unsigned char : 2;
35216         unsigned char TCIEU : 1;
35217         unsigned char TCIEV : 1;
35218         unsigned char : 2;
35219         unsigned char TGIEB : 1;
35220         unsigned char TGIEA : 1;
35221 #endif
35222     } BIT;
35223     } TIER;
35224     union {
35225         unsigned char BYTE;
35226     struct {
35227
35228 #ifdef __RX_LITTLE_ENDIAN__
35229         unsigned char TGFA : 1;
35230         unsigned char TGFB : 1;
35231         unsigned char : 2;
35232         unsigned char TCFV : 1;
35233         unsigned char TCFU : 1;
35234         unsigned char : 1;
35235         unsigned char TCFD : 1;
35236 #else
35237         unsigned char TCFD : 1;
35238         unsigned char : 1;
35239         unsigned char TCFU : 1;
35240         unsigned char TCFV : 1;
35241         unsigned char : 2;
35242         unsigned char TGFB : 1;
35243         unsigned char TGFA : 1;
35244 #endif
35245     } BIT;
35246     } TSR;
35247     unsigned short TCNT;
35248     unsigned short TGRA;
35249     unsigned short TGRB;
35250 } st_tpu5_t;
35251
35252 typedef struct st_tpu5 {
35253     union {
35254         unsigned char BYTE;
35255     struct {
35256
35257 #ifdef __RX_LITTLE_ENDIAN__
35258         unsigned char CST0 : 1;
35259         unsigned char CST1 : 1;
35260         unsigned char CST2 : 1;
35261         unsigned char CST3 : 1;
35262         unsigned char CST4 : 1;
35263         unsigned char CST5 : 1;
35264         unsigned char : 2;
35265 #else
35266         unsigned char : 2;
35267         unsigned char CST5 : 1;
35268         unsigned char CST4 : 1;
35269         unsigned char CST3 : 1;
35270         unsigned char CST2 : 1;
35271         unsigned char CST1 : 1;
35272         unsigned char CST0 : 1;
35273 #endif
35274     } BIT;
35275     } TSTR;
35276     union {
35277         unsigned char BYTE;
35278     struct {
35279
35280 #ifdef __RX_LITTLE_ENDIAN__
35281         unsigned char SYNC0 : 1;
35282         unsigned char SYNC1 : 1;
35283         unsigned char SYNC2 : 1;
35284         unsigned char SYNC3 : 1;
35285         unsigned char SYNC4 : 1;
35286         unsigned char SYNC5 : 1;
35287         unsigned char : 2;
35288 #else
35289         unsigned char : 2;
35290         unsigned char SYNC5 : 1;
35291         unsigned char SYNC4 : 1;
35292         unsigned char SYNC3 : 1;
35293         unsigned char SYNC2 : 1;
35294         unsigned char SYNC1 : 1;
35295         unsigned char SYNC0 : 1;
35296 #endif

```

```

35297     } BIT;
35298     } TSYP;
35299 } st_tpuat;
35300
35301 typedef struct st_usb {
35302     union {
35303         unsigned long LONG;
35304     } struct {
35305
35306 #ifdef __RX_LITTLE_ENDIAN__
35307     unsigned long SRPC0 : 1;
35308     unsigned long RPUE0 : 1;
35309     unsigned long : 1;
35310     unsigned long DRPD0 : 1;
35311     unsigned long FIXPHY0 : 1;
35312     unsigned long : 11;
35313     unsigned long DP0 : 1;
35314     unsigned long DM0 : 1;
35315     unsigned long : 2;
35316     unsigned long DOVCA0 : 1;
35317     unsigned long DOVCB0 : 1;
35318     unsigned long : 1;
35319     unsigned long DVBST0 : 1;
35320     unsigned long : 8;
35321 #else
35322     unsigned long : 8;
35323     unsigned long DVBST0 : 1;
35324     unsigned long : 1;
35325     unsigned long DOVCB0 : 1;
35326     unsigned long DOVCA0 : 1;
35327     unsigned long : 2;
35328     unsigned long DM0 : 1;
35329     unsigned long DP0 : 1;
35330     unsigned long : 11;
35331     unsigned long FIXPHY0 : 1;
35332     unsigned long DRPD0 : 1;
35333     unsigned long : 1;
35334     unsigned long RPUE0 : 1;
35335     unsigned long SRPC0 : 1;
35336 #endif
35337     } BIT;
35338     } DPUSR0R;
35339     union {
35340         unsigned long LONG;
35341     } struct {
35342
35343 #ifdef __RX_LITTLE_ENDIAN__
35344     unsigned long DPINTE0 : 1;
35345     unsigned long DMINTE0 : 1;
35346     unsigned long : 2;
35347     unsigned long DOVRCRAE0 : 1;
35348     unsigned long DOVRCRBE0 : 1;
35349     unsigned long : 1;
35350     unsigned long DVBSE0 : 1;
35351     unsigned long : 8;
35352     unsigned long DPINT0 : 1;
35353     unsigned long DMINT0 : 1;
35354     unsigned long : 2;
35355     unsigned long DOVRCRA0 : 1;
35356     unsigned long DOVRCRB0 : 1;
35357     unsigned long : 1;
35358     unsigned long DVBINT0 : 1;
35359     unsigned long : 8;
35360 #else
35361     unsigned long : 8;
35362     unsigned long DVBINT0 : 1;
35363     unsigned long : 1;
35364     unsigned long DOVRCRB0 : 1;
35365     unsigned long DOVRCRA0 : 1;
35366     unsigned long : 2;
35367     unsigned long DMINT0 : 1;
35368     unsigned long DPINT0 : 1;
35369     unsigned long : 8;
35370     unsigned long DVBSE0 : 1;
35371     unsigned long : 1;
35372     unsigned long DOVRCRBE0 : 1;
35373     unsigned long DOVRCRAE0 : 1;
35374     unsigned long : 2;
35375     unsigned long DMINTE0 : 1;
35376     unsigned long DPINTE0 : 1;
35377 #endif
35378     } BIT;
35379     } DPUSR1R;
35380 } st_usb_t;
35381
35382 typedef struct st_usb0 {
35383     union {

```

```

35384     unsigned short WORD;
35385     struct {
35386
35387 #ifdef __RX_LITTLE_ENDIAN__
35388     unsigned short USBE : 1;
35389     unsigned short : 3;
35390     unsigned short DPRPU : 1;
35391     unsigned short DRPD : 1;
35392     unsigned short DCFM : 1;
35393     unsigned short : 3;
35394     unsigned short SCKE : 1;
35395     unsigned short : 5;
35396 #else
35397     unsigned short : 5;
35398     unsigned short SCKE : 1;
35399     unsigned short : 3;
35400     unsigned short DCFM : 1;
35401     unsigned short DRPD : 1;
35402     unsigned short DPRPU : 1;
35403     unsigned short : 3;
35404     unsigned short USBE : 1;
35405 #endif
35406     } BIT;
35407     } SYSCFG;
35408     char      wk0[2];
35409     union {
35410         unsigned short WORD;
35411         struct {
35412
35413 #ifdef __RX_LITTLE_ENDIAN__
35414         unsigned short LNST : 2;
35415         unsigned short IDMON : 1;
35416         unsigned short : 2;
35417         unsigned short SOFEA : 1;
35418         unsigned short HTACT : 1;
35419         unsigned short : 7;
35420         unsigned short OVCMON : 2;
35421 #else
35422         unsigned short OVCMON : 2;
35423         unsigned short : 7;
35424         unsigned short HTACT : 1;
35425         unsigned short SOFEA : 1;
35426         unsigned short : 2;
35427         unsigned short IDMON : 1;
35428         unsigned short LNST : 2;
35429 #endif
35430         } BIT;
35431         } SYSSTS0;
35432     char      wk1[2];
35433     union {
35434         unsigned short WORD;
35435         struct {
35436
35437 #ifdef __RX_LITTLE_ENDIAN__
35438         unsigned short RHST : 3;
35439         unsigned short : 1;
35440         unsigned short UACT : 1;
35441         unsigned short RESUME : 1;
35442         unsigned short USBRST : 1;
35443         unsigned short RWUPE : 1;
35444         unsigned short WKUP : 1;
35445         unsigned short VBUSEN : 1;
35446         unsigned short EXICEN : 1;
35447         unsigned short HNPBTOA : 1;
35448         unsigned short : 4;
35449 #else
35450         unsigned short : 4;
35451         unsigned short HNPBTOA : 1;
35452         unsigned short EXICEN : 1;
35453         unsigned short VBUSEN : 1;
35454         unsigned short WKUP : 1;
35455         unsigned short RWUPE : 1;
35456         unsigned short USBRST : 1;
35457         unsigned short RESUME : 1;
35458         unsigned short UACT : 1;
35459         unsigned short : 1;
35460         unsigned short RHST : 3;
35461 #endif
35462         } BIT;
35463         } DVSTCTR0;
35464     char      wk2[10];
35465     union {
35466         unsigned short WORD;
35467         struct {
35468             unsigned char L;
35469             unsigned char H;
35470         } BYTE;

```

```

35471     } CFIFO;
35472     char          wk3[2];
35473     union {
35474         unsigned short WORD;
35475         struct {
35476             unsigned char L;
35477             unsigned char H;
35478         } BYTE;
35479     } D0FIFO;
35480     char          wk4[2];
35481     union {
35482         unsigned short WORD;
35483         struct {
35484             unsigned char L;
35485             unsigned char H;
35486         } BYTE;
35487     } D1FIFO;
35488     char          wk5[2];
35489     union {
35490         unsigned short WORD;
35491         struct {
35492
35493 #ifdef __RX_LITTLE_ENDIAN__
35494         unsigned short CURPIPE : 4;
35495         unsigned short  : 1;
35496         unsigned short ISEL : 1;
35497         unsigned short  : 2;
35498         unsigned short BIGEND : 1;
35499         unsigned short  : 1;
35500         unsigned short MBW : 1;
35501         unsigned short  : 3;
35502         unsigned short REW : 1;
35503         unsigned short RCNT : 1;
35504 #else
35505         unsigned short RCNT : 1;
35506         unsigned short REW : 1;
35507         unsigned short  : 3;
35508         unsigned short MBW : 1;
35509         unsigned short  : 1;
35510         unsigned short BIGEND : 1;
35511         unsigned short  : 2;
35512         unsigned short ISEL : 1;
35513         unsigned short  : 1;
35514         unsigned short CURPIPE : 4;
35515 #endif
35516     } BIT;
35517     } CFIFOSEL;
35518     union {
35519         unsigned short WORD;
35520         struct {
35521
35522 #ifdef __RX_LITTLE_ENDIAN__
35523         unsigned short DTLN : 9;
35524         unsigned short  : 4;
35525         unsigned short FRDY : 1;
35526         unsigned short BCLR : 1;
35527         unsigned short BVAL : 1;
35528 #else
35529         unsigned short BVAL : 1;
35530         unsigned short BCLR : 1;
35531         unsigned short FRDY : 1;
35532         unsigned short  : 4;
35533         unsigned short DTLN : 9;
35534 #endif
35535     } BIT;
35536     } CFIFOCTR;
35537     char          wk6[4];
35538     union {
35539         unsigned short WORD;
35540         struct {
35541
35542 #ifdef __RX_LITTLE_ENDIAN__
35543         unsigned short CURPIPE : 4;
35544         unsigned short  : 4;
35545         unsigned short BIGEND : 1;
35546         unsigned short  : 1;
35547         unsigned short MBW : 1;
35548         unsigned short  : 1;
35549         unsigned short DREQE : 1;
35550         unsigned short DCLRM : 1;
35551         unsigned short REW : 1;
35552         unsigned short RCNT : 1;
35553 #else
35554         unsigned short RCNT : 1;
35555         unsigned short REW : 1;
35556         unsigned short DCLRM : 1;
35557         unsigned short DREQE : 1;

```

```

35558         unsigned short : 1;
35559         unsigned short MBW : 1;
35560         unsigned short : 1;
35561         unsigned short BIGEND : 1;
35562         unsigned short : 4;
35563         unsigned short CURPIPE : 4;
35564     #endif
35565     } BIT;
35566     } D0FIFOSEL;
35567     union {
35568         unsigned short WORD;
35569         struct {
35570
35571     #ifdef __RX_LITTLE_ENDIAN__
35572         unsigned short DTLN : 9;
35573         unsigned short : 4;
35574         unsigned short FRDY : 1;
35575         unsigned short BCLR : 1;
35576         unsigned short BVAL : 1;
35577     #else
35578         unsigned short BVAL : 1;
35579         unsigned short BCLR : 1;
35580         unsigned short FRDY : 1;
35581         unsigned short : 4;
35582         unsigned short DTLN : 9;
35583     #endif
35584     } BIT;
35585     } D0FIFOCTR;
35586     union {
35587         unsigned short WORD;
35588         struct {
35589
35590     #ifdef __RX_LITTLE_ENDIAN__
35591         unsigned short CURPIPE : 4;
35592         unsigned short : 4;
35593         unsigned short BIGEND : 1;
35594         unsigned short : 1;
35595         unsigned short MBW : 1;
35596         unsigned short : 1;
35597         unsigned short DREQE : 1;
35598         unsigned short DCLRM : 1;
35599         unsigned short REW : 1;
35600         unsigned short RCNT : 1;
35601     #else
35602         unsigned short RCNT : 1;
35603         unsigned short REW : 1;
35604         unsigned short DCLRM : 1;
35605         unsigned short DREQE : 1;
35606         unsigned short : 1;
35607         unsigned short MBW : 1;
35608         unsigned short : 1;
35609         unsigned short BIGEND : 1;
35610         unsigned short : 4;
35611         unsigned short CURPIPE : 4;
35612     #endif
35613     } BIT;
35614     } D1FIFOSEL;
35615     union {
35616         unsigned short WORD;
35617         struct {
35618
35619     #ifdef __RX_LITTLE_ENDIAN__
35620         unsigned short DTLN : 9;
35621         unsigned short : 4;
35622         unsigned short FRDY : 1;
35623         unsigned short BCLR : 1;
35624         unsigned short BVAL : 1;
35625     #else
35626         unsigned short BVAL : 1;
35627         unsigned short BCLR : 1;
35628         unsigned short FRDY : 1;
35629         unsigned short : 4;
35630         unsigned short DTLN : 9;
35631     #endif
35632     } BIT;
35633     } D1FIFOCTR;
35634     union {
35635         unsigned short WORD;
35636         struct {
35637
35638     #ifdef __RX_LITTLE_ENDIAN__
35639         unsigned short : 8;
35640         unsigned short BRDYE : 1;
35641         unsigned short NRDYE : 1;
35642         unsigned short BEMPE : 1;
35643         unsigned short CTRE : 1;
35644         unsigned short DVSE : 1;

```

```

35645         unsigned short SOFE : 1;
35646         unsigned short RSME : 1;
35647         unsigned short VBSE : 1;
35648 #else
35649         unsigned short VBSE : 1;
35650         unsigned short RSME : 1;
35651         unsigned short SOFE : 1;
35652         unsigned short DVSE : 1;
35653         unsigned short CTRE : 1;
35654         unsigned short BEMPE : 1;
35655         unsigned short NRDYE : 1;
35656         unsigned short BRDYE : 1;
35657         unsigned short : 8;
35658 #endif
35659     } BIT;
35660 } INTENB0;
35661 union {
35662     unsigned short WORD;
35663     struct {
35664
35665 #ifdef __RX_LITTLE_ENDIAN__
35666         unsigned short : 4;
35667         unsigned short SACKE : 1;
35668         unsigned short SIGNE : 1;
35669         unsigned short EOFERRE : 1;
35670         unsigned short : 4;
35671         unsigned short ATTCHKE : 1;
35672         unsigned short DTCHE : 1;
35673         unsigned short : 1;
35674         unsigned short BCHGE : 1;
35675         unsigned short OVRCRE : 1;
35676 #else
35677         unsigned short OVRCRE : 1;
35678         unsigned short BCHGE : 1;
35679         unsigned short : 1;
35680         unsigned short DTCHE : 1;
35681         unsigned short ATTCHKE : 1;
35682         unsigned short : 4;
35683         unsigned short EOFERRE : 1;
35684         unsigned short SIGNE : 1;
35685         unsigned short SACKE : 1;
35686         unsigned short : 4;
35687 #endif
35688     } BIT;
35689     } INTENB1;
35690     char          wk7[2];
35691     union {
35692         unsigned short WORD;
35693         struct {
35694
35695 #ifdef __RX_LITTLE_ENDIAN__
35696         unsigned short PIPE0BRDYE : 1;
35697         unsigned short PIPE1BRDYE : 1;
35698         unsigned short PIPE2BRDYE : 1;
35699         unsigned short PIPE3BRDYE : 1;
35700         unsigned short PIPE4BRDYE : 1;
35701         unsigned short PIPE5BRDYE : 1;
35702         unsigned short PIPE6BRDYE : 1;
35703         unsigned short PIPE7BRDYE : 1;
35704         unsigned short PIPE8BRDYE : 1;
35705         unsigned short PIPE9BRDYE : 1;
35706         unsigned short : 6;
35707 #else
35708         unsigned short : 6;
35709         unsigned short PIPE9BRDYE : 1;
35710         unsigned short PIPE8BRDYE : 1;
35711         unsigned short PIPE7BRDYE : 1;
35712         unsigned short PIPE6BRDYE : 1;
35713         unsigned short PIPE5BRDYE : 1;
35714         unsigned short PIPE4BRDYE : 1;
35715         unsigned short PIPE3BRDYE : 1;
35716         unsigned short PIPE2BRDYE : 1;
35717         unsigned short PIPE1BRDYE : 1;
35718         unsigned short PIPE0BRDYE : 1;
35719 #endif
35720     } BIT;
35721     } BRDYENB;
35722     union {
35723         unsigned short WORD;
35724         struct {
35725
35726 #ifdef __RX_LITTLE_ENDIAN__
35727         unsigned short PIPE0NRDYE : 1;
35728         unsigned short PIPE1NRDYE : 1;
35729         unsigned short PIPE2NRDYE : 1;
35730         unsigned short PIPE3NRDYE : 1;
35731         unsigned short PIPE4NRDYE : 1;

```

```

35732         unsigned short PIPE5NRDYE : 1;
35733         unsigned short PIPE6NRDYE : 1;
35734         unsigned short PIPE7NRDYE : 1;
35735         unsigned short PIPE8NRDYE : 1;
35736         unsigned short PIPE9NRDYE : 1;
35737         unsigned short : 6;
35738     #else
35739         unsigned short : 6;
35740         unsigned short PIPE9NRDYE : 1;
35741         unsigned short PIPE8NRDYE : 1;
35742         unsigned short PIPE7NRDYE : 1;
35743         unsigned short PIPE6NRDYE : 1;
35744         unsigned short PIPE5NRDYE : 1;
35745         unsigned short PIPE4NRDYE : 1;
35746         unsigned short PIPE3NRDYE : 1;
35747         unsigned short PIPE2NRDYE : 1;
35748         unsigned short PIPE1NRDYE : 1;
35749         unsigned short PIPE0NRDYE : 1;
35750 #endif
35751     } BIT;
35752     } NRDYENB;
35753     union {
35754         unsigned short WORD;
35755         struct {
35756
35757 #ifdef __RX_LITTLE_ENDIAN__
35758         unsigned short PIPE0BEMPE : 1;
35759         unsigned short PIPE1BEMPE : 1;
35760         unsigned short PIPE2BEMPE : 1;
35761         unsigned short PIPE3BEMPE : 1;
35762         unsigned short PIPE4BEMPE : 1;
35763         unsigned short PIPE5BEMPE : 1;
35764         unsigned short PIPE6BEMPE : 1;
35765         unsigned short PIPE7BEMPE : 1;
35766         unsigned short PIPE8BEMPE : 1;
35767         unsigned short PIPE9BEMPE : 1;
35768         unsigned short : 6;
35769     #else
35770         unsigned short : 6;
35771         unsigned short PIPE9BEMPE : 1;
35772         unsigned short PIPE8BEMPE : 1;
35773         unsigned short PIPE7BEMPE : 1;
35774         unsigned short PIPE6BEMPE : 1;
35775         unsigned short PIPE5BEMPE : 1;
35776         unsigned short PIPE4BEMPE : 1;
35777         unsigned short PIPE3BEMPE : 1;
35778         unsigned short PIPE2BEMPE : 1;
35779         unsigned short PIPE1BEMPE : 1;
35780         unsigned short PIPE0BEMPE : 1;
35781     #endif
35782     } BIT;
35783     } BEMPENB;
35784     union {
35785         unsigned short WORD;
35786         struct {
35787
35788 #ifdef __RX_LITTLE_ENDIAN__
35789         unsigned short : 4;
35790         unsigned short EDGESTS : 1;
35791         unsigned short : 1;
35792         unsigned short BRDYM : 1;
35793         unsigned short : 1;
35794         unsigned short TRNENSEL : 1;
35795         unsigned short : 7;
35796     #else
35797         unsigned short : 7;
35798         unsigned short TRNENSEL : 1;
35799         unsigned short : 1;
35800         unsigned short BRDYM : 1;
35801         unsigned short : 1;
35802         unsigned short EDGESTS : 1;
35803         unsigned short : 4;
35804     #endif
35805     } BIT;
35806     } SOFCFG;
35807     char wk8[2];
35808     union {
35809         unsigned short WORD;
35810         struct {
35811
35812 #ifdef __RX_LITTLE_ENDIAN__
35813         unsigned short CTSQ : 3;
35814         unsigned short VALID : 1;
35815         unsigned short DVSQ : 3;
35816         unsigned short VBSTS : 1;
35817         unsigned short BRDY : 1;
35818         unsigned short NRDY : 1;

```

```

35819         unsigned short BEMP : 1;
35820         unsigned short CTRT : 1;
35821         unsigned short DVST : 1;
35822         unsigned short SOFR : 1;
35823         unsigned short RESM : 1;
35824         unsigned short VBINT : 1;
35825 #else
35826         unsigned short VBINT : 1;
35827         unsigned short RESM : 1;
35828         unsigned short SOFR : 1;
35829         unsigned short DVST : 1;
35830         unsigned short CTRT : 1;
35831         unsigned short BEMP : 1;
35832         unsigned short NRDY : 1;
35833         unsigned short BRDY : 1;
35834         unsigned short VBSTS : 1;
35835         unsigned short DVSQ : 3;
35836         unsigned short VALID : 1;
35837         unsigned short CTSQ : 3;
35838 #endif
35839     } BIT;
35840 } INTSTS0;
35841 union {
35842     unsigned short WORD;
35843     struct {
35844
35845 #ifdef __RX_LITTLE_ENDIAN__
35846         unsigned short : 4;
35847         unsigned short SACK : 1;
35848         unsigned short SIGN : 1;
35849         unsigned short EOFERR : 1;
35850         unsigned short : 4;
35851         unsigned short ATTCH : 1;
35852         unsigned short DTCH : 1;
35853         unsigned short : 1;
35854         unsigned short BCHG : 1;
35855         unsigned short OVRCCR : 1;
35856 #else
35857         unsigned short OVRCCR : 1;
35858         unsigned short BCHG : 1;
35859         unsigned short : 1;
35860         unsigned short DTCH : 1;
35861         unsigned short ATTCH : 1;
35862         unsigned short : 4;
35863         unsigned short EOFERR : 1;
35864         unsigned short SIGN : 1;
35865         unsigned short SACK : 1;
35866         unsigned short : 4;
35867 #endif
35868     } BIT;
35869     } INTSTS1;
35870     char          wk9[2];
35871     union {
35872         unsigned short WORD;
35873         struct {
35874
35875 #ifdef __RX_LITTLE_ENDIAN__
35876         unsigned short PIPE0BRDY : 1;
35877         unsigned short PIPE1BRDY : 1;
35878         unsigned short PIPE2BRDY : 1;
35879         unsigned short PIPE3BRDY : 1;
35880         unsigned short PIPE4BRDY : 1;
35881         unsigned short PIPE5BRDY : 1;
35882         unsigned short PIPE6BRDY : 1;
35883         unsigned short PIPE7BRDY : 1;
35884         unsigned short PIPE8BRDY : 1;
35885         unsigned short PIPE9BRDY : 1;
35886         unsigned short : 6;
35887 #else
35888         unsigned short : 6;
35889         unsigned short PIPE9BRDY : 1;
35890         unsigned short PIPE8BRDY : 1;
35891         unsigned short PIPE7BRDY : 1;
35892         unsigned short PIPE6BRDY : 1;
35893         unsigned short PIPE5BRDY : 1;
35894         unsigned short PIPE4BRDY : 1;
35895         unsigned short PIPE3BRDY : 1;
35896         unsigned short PIPE2BRDY : 1;
35897         unsigned short PIPE1BRDY : 1;
35898         unsigned short PIPE0BRDY : 1;
35899 #endif
35900     } BIT;
35901     } BRDYSTS;
35902     union {
35903         unsigned short WORD;
35904         struct {
35905

```

```

35906 #ifdef __RX_LITTLE_ENDIAN__
35907     unsigned short PIPE0NRDY : 1;
35908     unsigned short PIPE1NRDY : 1;
35909     unsigned short PIPE2NRDY : 1;
35910     unsigned short PIPE3NRDY : 1;
35911     unsigned short PIPE4NRDY : 1;
35912     unsigned short PIPE5NRDY : 1;
35913     unsigned short PIPE6NRDY : 1;
35914     unsigned short PIPE7NRDY : 1;
35915     unsigned short PIPE8NRDY : 1;
35916     unsigned short PIPE9NRDY : 1;
35917     unsigned short : 6;
35918 #else
35919     unsigned short : 6;
35920     unsigned short PIPE9NRDY : 1;
35921     unsigned short PIPE8NRDY : 1;
35922     unsigned short PIPE7NRDY : 1;
35923     unsigned short PIPE6NRDY : 1;
35924     unsigned short PIPE5NRDY : 1;
35925     unsigned short PIPE4NRDY : 1;
35926     unsigned short PIPE3NRDY : 1;
35927     unsigned short PIPE2NRDY : 1;
35928     unsigned short PIPE1NRDY : 1;
35929     unsigned short PIPE0NRDY : 1;
35930 #endif
35931 } BIT;
35932 } NRDYSTS;
35933 union {
35934     unsigned short WORD;
35935     struct {
35936
35937 #ifdef __RX_LITTLE_ENDIAN__
35938     unsigned short PIPE0BEMP : 1;
35939     unsigned short PIPE1BEMP : 1;
35940     unsigned short PIPE2BEMP : 1;
35941     unsigned short PIPE3BEMP : 1;
35942     unsigned short PIPE4BEMP : 1;
35943     unsigned short PIPE5BEMP : 1;
35944     unsigned short PIPE6BEMP : 1;
35945     unsigned short PIPE7BEMP : 1;
35946     unsigned short PIPE8BEMP : 1;
35947     unsigned short PIPE9BEMP : 1;
35948     unsigned short : 6;
35949 #else
35950     unsigned short : 6;
35951     unsigned short PIPE9BEMP : 1;
35952     unsigned short PIPE8BEMP : 1;
35953     unsigned short PIPE7BEMP : 1;
35954     unsigned short PIPE6BEMP : 1;
35955     unsigned short PIPE5BEMP : 1;
35956     unsigned short PIPE4BEMP : 1;
35957     unsigned short PIPE3BEMP : 1;
35958     unsigned short PIPE2BEMP : 1;
35959     unsigned short PIPE1BEMP : 1;
35960     unsigned short PIPE0BEMP : 1;
35961 #endif
35962 } BIT;
35963 } BEMPSTS;
35964 union {
35965     unsigned short WORD;
35966     struct {
35967
35968 #ifdef __RX_LITTLE_ENDIAN__
35969     unsigned short FRNM : 11;
35970     unsigned short : 3;
35971     unsigned short CRCE : 1;
35972     unsigned short OVRN : 1;
35973 #else
35974     unsigned short OVRN : 1;
35975     unsigned short CRCE : 1;
35976     unsigned short : 3;
35977     unsigned short FRNM : 11;
35978 #endif
35979 } BIT;
35980 } FRMNUM;
35981 union {
35982     unsigned short WORD;
35983     struct {
35984
35985 #ifdef __RX_LITTLE_ENDIAN__
35986     unsigned short : 15;
35987     unsigned short DVCHG : 1;
35988 #else
35989     unsigned short DVCHG : 1;
35990     unsigned short : 15;
35991 #endif
35992 } BIT;

```

```

35993     } DVCHGR;
35994     union {
35995         unsigned short WORD;
35996     struct {
35997
35998 #ifdef __RX_LITTLE_ENDIAN__
35999         unsigned short USBADDR : 7;
36000         unsigned short : 1;
36001         unsigned short STSRECOV : 4;
36002         unsigned short : 4;
36003 #else
36004         unsigned short : 4;
36005         unsigned short STSRECOV : 4;
36006         unsigned short : 1;
36007         unsigned short USBADDR : 7;
36008 #endif
36009     } BIT;
36010     } USBADDR;
36011     char        wk10[2];
36012     union {
36013         unsigned short WORD;
36014     struct {
36015
36016 #ifdef __RX_LITTLE_ENDIAN__
36017         unsigned short BMREQUESTTYPE : 8;
36018         unsigned short BREQUEST : 8;
36019 #else
36020         unsigned short BREQUEST : 8;
36021         unsigned short BMREQUESTTYPE : 8;
36022 #endif
36023     } BIT;
36024     } USBREQ;
36025     unsigned short USBVAL;
36026     unsigned short USBINDX;
36027     unsigned short USBLENG;
36028     union {
36029         unsigned short WORD;
36030     struct {
36031
36032 #ifdef __RX_LITTLE_ENDIAN__
36033         unsigned short : 4;
36034         unsigned short DIR : 1;
36035         unsigned short : 2;
36036         unsigned short SHTNAK : 1;
36037         unsigned short : 8;
36038 #else
36039         unsigned short : 8;
36040         unsigned short SHTNAK : 1;
36041         unsigned short : 2;
36042         unsigned short DIR : 1;
36043         unsigned short : 4;
36044 #endif
36045     } BIT;
36046     } DCPCFG;
36047     union {
36048         unsigned short WORD;
36049     struct {
36050
36051 #ifdef __RX_LITTLE_ENDIAN__
36052         unsigned short MXPS : 7;
36053         unsigned short : 5;
36054         unsigned short DEVSEL : 4;
36055 #else
36056         unsigned short DEVSEL : 4;
36057         unsigned short : 5;
36058         unsigned short MXPS : 7;
36059 #endif
36060     } BIT;
36061     } DCPMAXP;
36062     union {
36063         unsigned short WORD;
36064     struct {
36065
36066 #ifdef __RX_LITTLE_ENDIAN__
36067         unsigned short PID : 2;
36068         unsigned short CCPL : 1;
36069         unsigned short : 2;
36070         unsigned short PBUSY : 1;
36071         unsigned short SQMON : 1;
36072         unsigned short SQSET : 1;
36073         unsigned short SQCLR : 1;
36074         unsigned short : 2;
36075         unsigned short SUREQCLR : 1;
36076         unsigned short : 2;
36077         unsigned short SUREQ : 1;
36078         unsigned short BSTS : 1;
36079 #else

```

```

36080         unsigned short BSTS : 1;
36081         unsigned short SUREQ : 1;
36082         unsigned short : 2;
36083         unsigned short SUREQCLR : 1;
36084         unsigned short : 2;
36085         unsigned short SQCLR : 1;
36086         unsigned short SQSET : 1;
36087         unsigned short SQMON : 1;
36088         unsigned short PBUSY : 1;
36089         unsigned short : 2;
36090         unsigned short CCPL : 1;
36091         unsigned short PID : 2;
36092 #endif
36093     } BIT;
36094     } DCPCTR;
36095     char        wk11[2];
36096     union {
36097         unsigned short WORD;
36098         struct {
36099
36100 #ifdef __RX_LITTLE_ENDIAN__
36101         unsigned short PIPESEL : 4;
36102         unsigned short : 12;
36103 #else
36104         unsigned short : 12;
36105         unsigned short PIPESEL : 4;
36106 #endif
36107     } BIT;
36108     } PIPESEL;
36109     char        wk12[2];
36110     union {
36111         unsigned short WORD;
36112         struct {
36113
36114 #ifdef __RX_LITTLE_ENDIAN__
36115         unsigned short EPNUM : 4;
36116         unsigned short DIR : 1;
36117         unsigned short : 2;
36118         unsigned short SHTNAK : 1;
36119         unsigned short : 1;
36120         unsigned short DBLB : 1;
36121         unsigned short BFRE : 1;
36122         unsigned short : 3;
36123         unsigned short TYPE : 2;
36124 #else
36125         unsigned short TYPE : 2;
36126         unsigned short : 3;
36127         unsigned short BFRE : 1;
36128         unsigned short DBLB : 1;
36129         unsigned short : 1;
36130         unsigned short SHTNAK : 1;
36131         unsigned short : 2;
36132         unsigned short DIR : 1;
36133         unsigned short EPNUM : 4;
36134 #endif
36135     } BIT;
36136     } PIPECFG;
36137     char        wk13[2];
36138     union {
36139         unsigned short WORD;
36140         struct {
36141
36142 #ifdef __RX_LITTLE_ENDIAN__
36143         unsigned short MXPS : 9;
36144         unsigned short : 3;
36145         unsigned short DEVSEL : 4;
36146 #else
36147         unsigned short DEVSEL : 4;
36148         unsigned short : 3;
36149         unsigned short MXPS : 9;
36150 #endif
36151     } BIT;
36152     } PIPEMAXP;
36153     union {
36154         unsigned short WORD;
36155         struct {
36156
36157 #ifdef __RX_LITTLE_ENDIAN__
36158         unsigned short IITV : 3;
36159         unsigned short : 9;
36160         unsigned short IFIS : 1;
36161         unsigned short : 3;
36162 #else
36163         unsigned short : 3;
36164         unsigned short IFIS : 1;
36165         unsigned short : 9;
36166         unsigned short IITV : 3;

```

```

36167 #endif
36168     } BIT;
36169     } PIPEPERI;
36170     union {
36171         unsigned short WORD;
36172         struct {
36173
36174 #ifdef __RX_LITTLE_ENDIAN__
36175         unsigned short PID : 2;
36176         unsigned short : 3;
36177         unsigned short PBUSY : 1;
36178         unsigned short SQMON : 1;
36179         unsigned short SQSET : 1;
36180         unsigned short SQCLR : 1;
36181         unsigned short ACLRM : 1;
36182         unsigned short ATREPM : 1;
36183         unsigned short : 3;
36184         unsigned short INBUFM : 1;
36185         unsigned short BSTS : 1;
36186 #else
36187         unsigned short BSTS : 1;
36188         unsigned short INBUFM : 1;
36189         unsigned short : 3;
36190         unsigned short ATREPM : 1;
36191         unsigned short ACLRM : 1;
36192         unsigned short SQCLR : 1;
36193         unsigned short SQSET : 1;
36194         unsigned short SQMON : 1;
36195         unsigned short PBUSY : 1;
36196         unsigned short : 3;
36197         unsigned short PID : 2;
36198 #endif
36199     } BIT;
36200     } PIPE1CTR;
36201     union {
36202         unsigned short WORD;
36203         struct {
36204
36205 #ifdef __RX_LITTLE_ENDIAN__
36206         unsigned short PID : 2;
36207         unsigned short : 3;
36208         unsigned short PBUSY : 1;
36209         unsigned short SQMON : 1;
36210         unsigned short SQSET : 1;
36211         unsigned short SQCLR : 1;
36212         unsigned short ACLRM : 1;
36213         unsigned short ATREPM : 1;
36214         unsigned short : 3;
36215         unsigned short INBUFM : 1;
36216         unsigned short BSTS : 1;
36217 #else
36218         unsigned short BSTS : 1;
36219         unsigned short INBUFM : 1;
36220         unsigned short : 3;
36221         unsigned short ATREPM : 1;
36222         unsigned short ACLRM : 1;
36223         unsigned short SQCLR : 1;
36224         unsigned short SQSET : 1;
36225         unsigned short SQMON : 1;
36226         unsigned short PBUSY : 1;
36227         unsigned short : 3;
36228         unsigned short PID : 2;
36229 #endif
36230     } BIT;
36231     } PIPE2CTR;
36232     union {
36233         unsigned short WORD;
36234         struct {
36235
36236 #ifdef __RX_LITTLE_ENDIAN__
36237         unsigned short PID : 2;
36238         unsigned short : 3;
36239         unsigned short PBUSY : 1;
36240         unsigned short SQMON : 1;
36241         unsigned short SQSET : 1;
36242         unsigned short SQCLR : 1;
36243         unsigned short ACLRM : 1;
36244         unsigned short ATREPM : 1;
36245         unsigned short : 3;
36246         unsigned short INBUFM : 1;
36247         unsigned short BSTS : 1;
36248 #else
36249         unsigned short BSTS : 1;
36250         unsigned short INBUFM : 1;
36251         unsigned short : 3;
36252         unsigned short ATREPM : 1;
36253         unsigned short ACLRM : 1;

```

```

36254         unsigned short SQCLR : 1;
36255         unsigned short SQSET : 1;
36256         unsigned short SQMON : 1;
36257         unsigned short PBUSY : 1;
36258         unsigned short : 3;
36259         unsigned short PID : 2;
36260 #endif
36261     } BIT;
36262     } PIPE3CTR;
36263     union {
36264         unsigned short WORD;
36265         struct {
36266
36267 #ifdef __RX_LITTLE_ENDIAN__
36268         unsigned short PID : 2;
36269         unsigned short : 3;
36270         unsigned short PBUSY : 1;
36271         unsigned short SQMON : 1;
36272         unsigned short SQSET : 1;
36273         unsigned short SQCLR : 1;
36274         unsigned short ACLRM : 1;
36275         unsigned short ATREPM : 1;
36276         unsigned short : 3;
36277         unsigned short INBUFM : 1;
36278         unsigned short BSTS : 1;
36279 #else
36280         unsigned short BSTS : 1;
36281         unsigned short INBUFM : 1;
36282         unsigned short : 3;
36283         unsigned short ATREPM : 1;
36284         unsigned short ACLRM : 1;
36285         unsigned short SQCLR : 1;
36286         unsigned short SQSET : 1;
36287         unsigned short SQMON : 1;
36288         unsigned short PBUSY : 1;
36289         unsigned short : 3;
36290         unsigned short PID : 2;
36291 #endif
36292     } BIT;
36293     } PIPE4CTR;
36294     union {
36295         unsigned short WORD;
36296         struct {
36297
36298 #ifdef __RX_LITTLE_ENDIAN__
36299         unsigned short PID : 2;
36300         unsigned short : 3;
36301         unsigned short PBUSY : 1;
36302         unsigned short SQMON : 1;
36303         unsigned short SQSET : 1;
36304         unsigned short SQCLR : 1;
36305         unsigned short ACLRM : 1;
36306         unsigned short ATREPM : 1;
36307         unsigned short : 3;
36308         unsigned short INBUFM : 1;
36309         unsigned short BSTS : 1;
36310 #else
36311         unsigned short BSTS : 1;
36312         unsigned short INBUFM : 1;
36313         unsigned short : 3;
36314         unsigned short ATREPM : 1;
36315         unsigned short ACLRM : 1;
36316         unsigned short SQCLR : 1;
36317         unsigned short SQSET : 1;
36318         unsigned short SQMON : 1;
36319         unsigned short PBUSY : 1;
36320         unsigned short : 3;
36321         unsigned short PID : 2;
36322 #endif
36323     } BIT;
36324     } PIPE5CTR;
36325     union {
36326         unsigned short WORD;
36327         struct {
36328
36329 #ifdef __RX_LITTLE_ENDIAN__
36330         unsigned short PID : 2;
36331         unsigned short : 3;
36332         unsigned short PBUSY : 1;
36333         unsigned short SQMON : 1;
36334         unsigned short SQSET : 1;
36335         unsigned short SQCLR : 1;
36336         unsigned short ACLRM : 1;
36337         unsigned short : 5;
36338         unsigned short BSTS : 1;
36339 #else
36340         unsigned short BSTS : 1;

```

```

36341         unsigned short : 5;
36342         unsigned short ACLRM : 1;
36343         unsigned short SQCLR : 1;
36344         unsigned short SQSET : 1;
36345         unsigned short SQMON : 1;
36346         unsigned short PBUSY : 1;
36347         unsigned short : 3;
36348         unsigned short PID : 2;
36349     #endif
36350     } BIT;
36351     } PIPE6CTR;
36352     union {
36353         unsigned short WORD;
36354         struct {
36355
36356     #ifdef __RX_LITTLE_ENDIAN__
36357         unsigned short PID : 2;
36358         unsigned short : 3;
36359         unsigned short PBUSY : 1;
36360         unsigned short SQMON : 1;
36361         unsigned short SQSET : 1;
36362         unsigned short SQCLR : 1;
36363         unsigned short ACLRM : 1;
36364         unsigned short : 5;
36365         unsigned short BSTS : 1;
36366     #else
36367         unsigned short BSTS : 1;
36368         unsigned short : 5;
36369         unsigned short ACLRM : 1;
36370         unsigned short SQCLR : 1;
36371         unsigned short SQSET : 1;
36372         unsigned short SQMON : 1;
36373         unsigned short PBUSY : 1;
36374         unsigned short : 3;
36375         unsigned short PID : 2;
36376     #endif
36377     } BIT;
36378     } PIPE7CTR;
36379     union {
36380         unsigned short WORD;
36381         struct {
36382
36383     #ifdef __RX_LITTLE_ENDIAN__
36384         unsigned short PID : 2;
36385         unsigned short : 3;
36386         unsigned short PBUSY : 1;
36387         unsigned short SQMON : 1;
36388         unsigned short SQSET : 1;
36389         unsigned short SQCLR : 1;
36390         unsigned short ACLRM : 1;
36391         unsigned short : 5;
36392         unsigned short BSTS : 1;
36393     #else
36394         unsigned short BSTS : 1;
36395         unsigned short : 5;
36396         unsigned short ACLRM : 1;
36397         unsigned short SQCLR : 1;
36398         unsigned short SQSET : 1;
36399         unsigned short SQMON : 1;
36400         unsigned short PBUSY : 1;
36401         unsigned short : 3;
36402         unsigned short PID : 2;
36403     #endif
36404     } BIT;
36405     } PIPE8CTR;
36406     union {
36407         unsigned short WORD;
36408         struct {
36409
36410     #ifdef __RX_LITTLE_ENDIAN__
36411         unsigned short PID : 2;
36412         unsigned short : 3;
36413         unsigned short PBUSY : 1;
36414         unsigned short SQMON : 1;
36415         unsigned short SQSET : 1;
36416         unsigned short SQCLR : 1;
36417         unsigned short ACLRM : 1;
36418         unsigned short : 5;
36419         unsigned short BSTS : 1;
36420     #else
36421         unsigned short BSTS : 1;
36422         unsigned short : 5;
36423         unsigned short ACLRM : 1;
36424         unsigned short SQCLR : 1;
36425         unsigned short SQSET : 1;
36426         unsigned short SQMON : 1;
36427         unsigned short PBUSY : 1;

```

```

36428         unsigned short : 3;
36429         unsigned short PID : 2;
36430 #endif
36431     } BIT;
36432     } PIPE9CTR;
36433     char          wk14[14];
36434     union {
36435         unsigned short WORD;
36436         struct {
36437
36438 #ifdef __RX_LITTLE_ENDIAN__
36439         unsigned short : 8;
36440         unsigned short TRCLR : 1;
36441         unsigned short TRENB : 1;
36442         unsigned short : 6;
36443 #else
36444         unsigned short : 6;
36445         unsigned short TRENB : 1;
36446         unsigned short TRCLR : 1;
36447         unsigned short : 8;
36448 #endif
36449     } BIT;
36450     } PIPE1TRE;
36451     unsigned short PIPE1TRN;
36452     union {
36453         unsigned short WORD;
36454         struct {
36455
36456 #ifdef __RX_LITTLE_ENDIAN__
36457         unsigned short : 8;
36458         unsigned short TRCLR : 1;
36459         unsigned short TRENB : 1;
36460         unsigned short : 6;
36461 #else
36462         unsigned short : 6;
36463         unsigned short TRENB : 1;
36464         unsigned short TRCLR : 1;
36465         unsigned short : 8;
36466 #endif
36467     } BIT;
36468     } PIPE2TRE;
36469     unsigned short PIPE2TRN;
36470     union {
36471         unsigned short WORD;
36472         struct {
36473
36474 #ifdef __RX_LITTLE_ENDIAN__
36475         unsigned short : 8;
36476         unsigned short TRCLR : 1;
36477         unsigned short TRENB : 1;
36478         unsigned short : 6;
36479 #else
36480         unsigned short : 6;
36481         unsigned short TRENB : 1;
36482         unsigned short TRCLR : 1;
36483         unsigned short : 8;
36484 #endif
36485     } BIT;
36486     } PIPE3TRE;
36487     unsigned short PIPE3TRN;
36488     union {
36489         unsigned short WORD;
36490         struct {
36491
36492 #ifdef __RX_LITTLE_ENDIAN__
36493         unsigned short : 8;
36494         unsigned short TRCLR : 1;
36495         unsigned short TRENB : 1;
36496         unsigned short : 6;
36497 #else
36498         unsigned short : 6;
36499         unsigned short TRENB : 1;
36500         unsigned short TRCLR : 1;
36501         unsigned short : 8;
36502 #endif
36503     } BIT;
36504     } PIPE4TRE;
36505     unsigned short PIPE4TRN;
36506     union {
36507         unsigned short WORD;
36508         struct {
36509
36510 #ifdef __RX_LITTLE_ENDIAN__
36511         unsigned short : 8;
36512         unsigned short TRCLR : 1;
36513         unsigned short TRENB : 1;
36514         unsigned short : 6;

```

```

36515 #else
36516     unsigned short : 6;
36517     unsigned short TRENB : 1;
36518     unsigned short TRCLR : 1;
36519     unsigned short : 8;
36520 #endif
36521 } BIT;
36522 } PIPE5TRE;
36523 unsigned short PIPE5TRN;
36524 char          wk15[44];
36525 union {
36526     unsigned short WORD;
36527     struct {
36528
36529 #ifdef __RX_LITTLE_ENDIAN__
36530     unsigned short : 6;
36531     unsigned short USBSPD : 2;
36532     unsigned short : 8;
36533 #else
36534     unsigned short : 8;
36535     unsigned short USBSPD : 2;
36536     unsigned short : 6;
36537 #endif
36538 } BIT;
36539 } DEVADD0;
36540 union {
36541     unsigned short WORD;
36542     struct {
36543
36544 #ifdef __RX_LITTLE_ENDIAN__
36545     unsigned short : 6;
36546     unsigned short USBSPD : 2;
36547     unsigned short : 8;
36548 #else
36549     unsigned short : 8;
36550     unsigned short USBSPD : 2;
36551     unsigned short : 6;
36552 #endif
36553 } BIT;
36554 } DEVADD1;
36555 union {
36556     unsigned short WORD;
36557     struct {
36558
36559 #ifdef __RX_LITTLE_ENDIAN__
36560     unsigned short : 6;
36561     unsigned short USBSPD : 2;
36562     unsigned short : 8;
36563 #else
36564     unsigned short : 8;
36565     unsigned short USBSPD : 2;
36566     unsigned short : 6;
36567 #endif
36568 } BIT;
36569 } DEVADD2;
36570 union {
36571     unsigned short WORD;
36572     struct {
36573
36574 #ifdef __RX_LITTLE_ENDIAN__
36575     unsigned short : 6;
36576     unsigned short USBSPD : 2;
36577     unsigned short : 8;
36578 #else
36579     unsigned short : 8;
36580     unsigned short USBSPD : 2;
36581     unsigned short : 6;
36582 #endif
36583 } BIT;
36584 } DEVADD3;
36585 union {
36586     unsigned short WORD;
36587     struct {
36588
36589 #ifdef __RX_LITTLE_ENDIAN__
36590     unsigned short : 6;
36591     unsigned short USBSPD : 2;
36592     unsigned short : 8;
36593 #else
36594     unsigned short : 8;
36595     unsigned short USBSPD : 2;
36596     unsigned short : 6;
36597 #endif
36598 } BIT;
36599 } DEVADD4;
36600 union {
36601     unsigned short WORD;

```

```

36602     struct {
36603
36604 #ifdef __RX_LITTLE_ENDIAN__
36605     unsigned short : 6;
36606     unsigned short USBSPD : 2;
36607     unsigned short : 8;
36608 #else
36609     unsigned short : 8;
36610     unsigned short USBSPD : 2;
36611     unsigned short : 6;
36612 #endif
36613     } BIT;
36614     } DEVADD5;
36615     char        wk16[20];
36616     union {
36617         unsigned long LONG;
36618         struct {
36619
36620 #ifdef __RX_LITTLE_ENDIAN__
36621         unsigned long SLEWR00 : 1;
36622         unsigned long SLEWR01 : 1;
36623         unsigned long SLEWF00 : 1;
36624         unsigned long SLEWF01 : 1;
36625         unsigned long : 28;
36626 #else
36627         unsigned long : 28;
36628         unsigned long SLEWF01 : 1;
36629         unsigned long SLEWF00 : 1;
36630         unsigned long SLEWR01 : 1;
36631         unsigned long SLEWR00 : 1;
36632 #endif
36633         } BIT;
36634         } PHYSLEW;
36635 } st_usb0_t;
36636
36637 typedef struct st_wdt {
36638     unsigned char  WDTRR;
36639     char          wk0[1];
36640     union {
36641         unsigned short WORD;
36642         struct {
36643
36644 #ifdef __RX_LITTLE_ENDIAN__
36645         unsigned short TOPS : 2;
36646         unsigned short : 2;
36647         unsigned short CKS : 4;
36648         unsigned short RPES : 2;
36649         unsigned short : 2;
36650         unsigned short RPSS : 2;
36651         unsigned short : 2;
36652 #else
36653         unsigned short : 2;
36654         unsigned short RPSS : 2;
36655         unsigned short : 2;
36656         unsigned short RPES : 2;
36657         unsigned short CKS : 4;
36658         unsigned short : 2;
36659         unsigned short TOPS : 2;
36660 #endif
36661         } BIT;
36662         } WDTCSR;
36663     union {
36664         unsigned short WORD;
36665         struct {
36666
36667 #ifdef __RX_LITTLE_ENDIAN__
36668         unsigned short CNTVAL : 14;
36669         unsigned short UNDFE : 1;
36670         unsigned short REFEF : 1;
36671 #else
36672         unsigned short REFEF : 1;
36673         unsigned short UNDFE : 1;
36674         unsigned short CNTVAL : 14;
36675 #endif
36676         } BIT;
36677         } WDTSR;
36678     union {
36679         unsigned char BYTE;
36680         struct {
36681
36682 #ifdef __RX_LITTLE_ENDIAN__
36683         unsigned char : 7;
36684         unsigned char RSTIRQS : 1;
36685 #else
36686         unsigned char RSTIRQS : 1;
36687         unsigned char : 7;
36688 #endif

```

```

36689     } BIT;
36690     } WDTRCR;
36691 } st_wdt_t;
36692
36693 typedef struct st_flashconst {
36694     unsigned long  UIDR0;
36695     unsigned long  UIDR1;
36696     unsigned long  UIDR2;
36697     unsigned long  UIDR3;
36698 } st_flashconst_t;
36699
36700 typedef struct st_tempsconst {
36701     unsigned long  TSCDR;
36702 } st_tempsconst_t;
36703
36704
36705 #pragma pack()
36706
36707 #endif
36708

```

```

00001 /*
00002  * gpio_test/linker.ld -- Linker script for GPIO breakout board test.
00003  *
00004  * Same memory map as usb_test: 512 KB internal SRAM, 2 MB internal ROM.
00005  * Includes Renesas-syntax sections (P, B, D, C) needed by ThreadX RXv3 port.
00006  */
00007
00008 MEMORY
00009 {
00010     RAM : ORIGIN = 0x00000004, LENGTH = 0x7FFFC /* 512 KB - 4 bytes */
00011     ROM : ORIGIN = 0xFFE00000, LENGTH = 0x200000 /* 2 MB */
00012 }
00013
00014 SECTIONS
00015 {
00016     /* Code -- explicit ROM base so section VMA is anchored correctly. */
00017     .text 0xFFE00000 : AT(0xFFE00000)
00018     {
00019         *(.text*)
00020         *(P)
00021         *(P)
00022         *(.rodata*)
00023         *(C)
00024         *(C)
00025         *(C)
00026         etext = .;
00027     } > ROM
00028
00029     /*
00030     * Relocatable vector table -- startup.S loads INTB with this address.
00031     * Must be 4-byte aligned; only vectors 27 (SWINT) and 28 (CMT0) are
00032     * used, but allocate 256 entries (1024 bytes) for safety.
00033     */
00034     .rvecors ALIGN(4) :
00035     {
00036         __rvecors_start = .;
00037         KEEP(*(.(rvecors)))
00038         __rvecors_end = .;
00039     } > ROM
00040
00041     /*
00042     * Initialised data -- LMA stays in ROM, VMA in RAM.
00043     * startup.S copies __data..edata from __mdata on boot.
00044     */
00045     __mdata = .;
00046     .data : AT(__mdata)
00047     {
00048         __data = .;
00049         *(.data*)
00050         *(D)
00051         *(D)
00052         *(D)
00053         __edata = .;
00054     } > RAM
00055
00056     /* BSS -- zeroed by startup.S */
00057     .bss :
00058     {
00059         __bss = .;
00060         *(.bss*)
00061         *(COMMON)

```

```


00062     *(B)
00063     *(B )
00064     *(B )
00065     __ebss = .;
00066     . = ALIGN(4);
00067     __end = .;
00068 } > RAM AT>RAM
00069
00070 /*
00071  * Stacks -- USP grows down from top of RAM, ISP 4 KB below that.
00072  */
00073 __ustack = ORIGIN(RAM) + LENGTH(RAM);
00074 __istack = __ustack - 0x1000;
00075
00076 /*
00077  * Exception vector table at fixed hardware address 0xFFFFF80.
00078  * 32 entries -- all unused.
00079  */
00080 .exvectors 0xFFFFF80 : AT(0xFFFFF80)
00081 {
00082     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00083     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00084     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00085     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00086     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00087     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00088     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00089     LONG(0xFFFFFFFF); LONG(0xFFFFFFFF); LONG(0xFFFFFFFF);
00090 } > ROM
00091
00092 /* Fixed reset vector at 0xFFFFF8C */
00093 .fvectors 0xFFFFF8C : AT(0xFFFFF8C)
00094 {
00095     KEEP(*(.fvectors))
00096 } > ROM
00097 }

```

```

#include <stdbool.h>
#include <stdint.h>
#include "iodef.h"

```

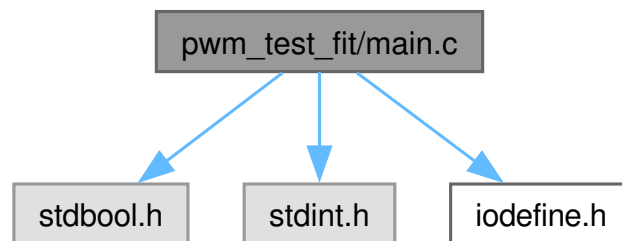

>

>

>

>

anonymous enum



```
00054 {
00055     k_pwm_pcka_hz    = 96000000U,
00056     k_pwm_freq_hz   = 20000U,
00057     k_pwm_period_cnt = 4800U,          /* PCKA / freq */
00058     k_pwm_gtpwr     = 4799U,          /* period - 1 */
00059     k_pwm_duty_pct   = 2400U,
00060     k_duty_step      = 48U,
00061     k_duty_hold_loops = 40000U,
00062
00063     /* PSEL value for GPTW alternate function on Port 1 / Port 2 pins.
00064      * Matches the PSEL used by r_aerpoint_rx's GPTW pin init (0x1E there is
00065      * Port D specific; 0x14 is the documented GTIOCnA/B select for the P1x
00066      * and P2x pins in the RX72N MPC tables -- same value used by STAR's
00067      * rx_gptw.c HAL and by pwm_test/main.c today). */
00068     k_psel_gptw      = 0x14U,
00069 };
```

```
void __tx_thread_context_restore (
    void )
```


```
00234 {}
```

```
void __tx_thread_context_save (
    void )
```

```
00233 {}
```

```
void clock_init (
    void ) [extern]
```

```
00034 {
00035     volatile uint16_t * const prcr = (volatile uint16_t *)&SYSTEM.PRCR.WORD;
00036     volatile uint8_t * const memwait = (volatile uint8_t *)MEMWAIT_ADDR;
00037     volatile uint16_t * const packcr = (volatile uint16_t *)PACKCR_ADDR;
00038
00039     /* Unlock PRC0 (clock) + PRC1 (module stop). */
00040     *prcr = PRCR_KEY_UNLOCK_PRC0_PRC1;
00041
00042     /* Start HOCO. */
00043     SYSTEM.HOCOCR.BYTE = 0x00U;
00044     while (SYSTEM.OSCOVFSR.BIT.HCOVF == 0U) { __asm__ volatile("nop"); }
00045
00046     /* PLL: HOCO 16 MHz / 1 * 12 = 192 MHz (PLIDIV=00, PLLSRCSEL=1, STC=23). */
00047     SYSTEM.PLLCR.WORD = 0x1710U;
00048     SYSTEM.PLLCR2.BYTE = 0x00U;
00049     while (SYSTEM.OSCOVFSR.BIT.PLOVF == 0U) { __asm__ volatile("nop"); }
00050
00051     /* MEMWAIT = 1 (required for ICLK > 120 MHz; harmless for us). */
00052     *memwait = 0x01U;
00053
00054     /* SCKCR: FCK=/4, ICK=/2, PSTOP1=1, PSTOP0=1, BCK=/4,
00055      * PCKA=/2 (96 MHz), PCKB=/4 (48 MHz), PCKC=/2, PCKD=/2. */
00056     SYSTEM.SCKCR.LONG = 0x21C21211U;
00057
00058     /* UPLLSEL = 0 : route UCLK divider input from main PLL. */
00059     *packcr = 0x0000U;
00060
00061     /* SCKCR2: UCK = /4 (48 MHz), bits [3:0] reserved = 1. */
00062     SYSTEM.SCKCR2.WORD = 0x0031U;
00063
00064     /* SCKCR3: select PLL as system clock source. */
00065     SYSTEM.SCKCR3.WORD = 0x0400U;
00066
00067     /* Relock PRCR. */
00068     *prcr = PRCR_KEY_LOCK;
00069 }
```




```
void cmt0_isr (
    void )

00235 {}


void configure_gptw0_pwm khz (
    void ) [static]

00128 {
00129     /* Unlock GPTW0 write protection. PRKEY=0xA5, WP bits cleared. */
00130     GPTW0.GTWP.LONG = 0x0000A500U;
00131
00132     /* Stop counter before configuring. GTCR.CST = 0 halts the counter. */
00133     GPTW0.GTCR.LONG = 0x00000000U;
00134
00135     /* Force count direction = up (UD=1) with UDF=1 to accept the write.
00136     * Without UDF, the UD bit write is ignored per the hardware manual. */
00137     GPTW0.GTUDDTYC.LONG = 0x00000003U;
00138
00139     /* Clear counter. */
00140     GPTW0.GTCNT = 0U;
00141
00142     /* Period: 4799 -> 20 kHz at 96 MHz PCKA. */
00143     GPTW0.GTPR = (uint32_t)k_pwm_gtp;
00144     GPTW0.GTPBR = (uint32_t)k_pwm_gtp;
00145
00146     /* Initial 50% duty on both channels for scope visibility.
00147     * GTCCRB = period - GTCCRA produces a mirror-image waveform on B. */
00148     GPTW0.GTCCRA = (uint32_t)k_pwm_duty;
00149     GPTW0.GTCCRB = (uint32_t)(k_pwm_period - k_pwm_duty);
00150
00151     /* GTIOR configuration using iodef bitfields.
00152     *
00153     * Per RX72N HW manual 26.2.14:
00154     *   GTIOA/GTIOB = 0b01001 (0x09):
00155     *   - Initial output LOW
00156     *   - Low at compare match with GTCCRA/B while counting up
00157     *   - High at cycle end (GTCNT reaches GTPR)
00158     *   -> produces an active-high sawtooth PWM pulse of width GTCCRx.
00159     *   OAE / OBE = 1 to actually drive the pad.
00160     *
00161     * Everything else zeroed (no dead time, no noise filter, no force-low). */
00162     GPTW0.GTIOR.LONG = 0U;
00163     GPTW0.GTIOR.BIT.GTIOA = 0x09U;
00164     GPTW0.GTIOR.BIT.OAE = 1U;
00165     GPTW0.GTIOR.BIT.GTIOB = 0x09U;
00166     GPTW0.GTIOR.BIT.OBE = 1U;
00167
00168     /* Enable single-buffer operation on GTCCRA/B and GTPR so writes
00169     * propagate on the next cycle boundary without glitching. Matches the
00170     * STAR HAL's tested configuration. */
00171     GPTW0.GTBER.LONG = 0x00050005U;
00172
00173     /* Select sawtooth PWM mode (MD=000), PCKA/1 (TPCS=0000), start (CST=1). */
00174     GPTW0.GTCR.BIT.MD = 0U;
00175     GPTW0.GTCR.BIT.TPCS = 0U;
00176     GPTW0.GTCR.BIT.CST = 1U;
00177
00178     /* Lock GPTW0 write protection. */
00179     GPTW0.GTWP.LONG = 0x0000A501U;
00180 }
```




```
void delay_loops (  
    uint32_t n)  [inline], [static]
```

```
00072 {  
00073     for (volatile uint32_t i = 0U; i < n; ++i) {  
00074         __asm__ volatile("nop");  
00075     }  
00076 }
```



```
int main (  
    void )
```

```
00219 {  
00220     clock_init();  
00221     release_gptw_from_module_stop();  
00222     route_gtioc0_to_p23_p17();  
00223     configure_gptw0_pwm khz();  
00224     run_pwm_sweep_forever();  
00225     return 0;  
00226 }
```

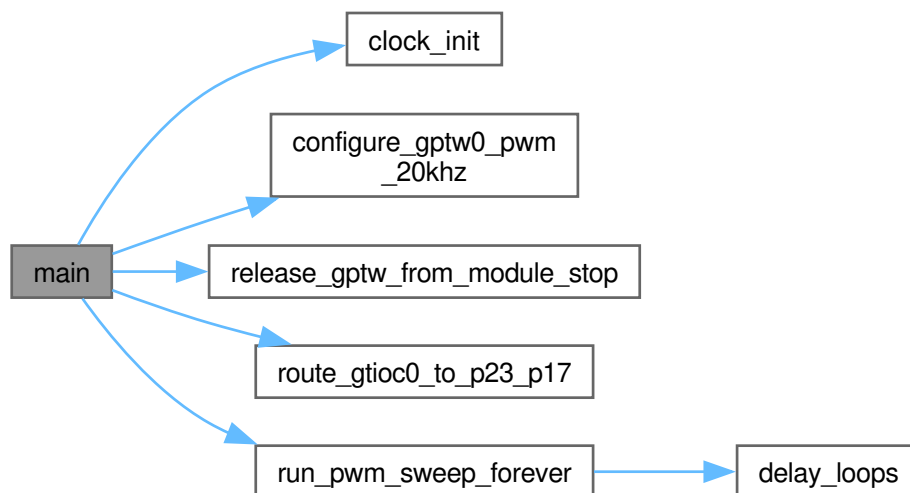


```
void release_gptw_from_module_stop (  
    void ) [static]
```

```
00086 {  
00087     /* Unlock PRC1 (module stop protection) via PRCR.  
00088     * PRCR requires the key 0xA5 in the upper byte. */  
00089     SYSTEM.PRCR.WORD = 0xA502U; /* PRKEY=0xA5, PRC1=1 */  
00090     MSTP(GPTW) = 0U; /* Expands to SYSTEM.MSTPCRA.BIT.MSTPA7 = 0 */  
00091     SYSTEM.PRCR.WORD = 0xA500U; /* Re-lock */  
00092 }
```




```
void route_gtioc0_to_p23_p17 (  
    void ) [static]
```

```
00101 {  
00102     /* Unlock MPC PFS writes: clear B0WI, then set PFSWE. */  
00103     MPC.PWPR.BIT.B0WI = 0U;  
00104     MPC.PWPR.BIT.PFSWE = 1U;  
00105  
00106     /* PSEL = 0x14 selects GPTW alternate function. */  
00107     MPC.P23PFS.BYTE = (uint8_t)k_psel_gptw; /* P23 -> GTIOC0A */  
00108     MPC.P17PFS.BYTE = (uint8_t)k_psel_gptw; /* P17 -> GTIOC0B */  
00109  
00110     /* Re-lock PFS writes. */  
00111     MPC.PWPR.BIT.PFSWE = 0U;  
00112     MPC.PWPR.BIT.B0WI = 1U;  
00113  
00114     /* Switch the pads to peripheral mode so the GPTW output drives the pin.  
00115     * We deliberately leave PDR alone -- the peripheral-mode pad is driven  
00116     * by GTIOCnA/B's OAE/OBE bits from GTIOR. */  
00117     PORT2.PMR.BIT.B3 = 1U; /* P23 */  
00118     PORT1.PMR.BIT.B7 = 1U; /* P17 */  
00119 }
```



```
void run_pwm_sweep_forever (
    void ) [static]
```

```
00184 {
00185     /* PA7 heartbeat LED so we can see firmware is alive even if PWM is dead. */
00186     PORTA.PDR.BIT.B7 = 1U;
00187     PORTA.PODR.BIT.B7 = 0U;
00188
00189     uint32_t duty    = 0U;
00190     uint32_t direction = 1U;
00191
00192     for (;;) {
00193         /* Buffered write -- propagates on next cycle boundary via GTCCRC. */
00194         GPTW0.GTCCRA = duty;
00195         GPTW0.GTCCRB = (uint32_t)k_pwm_period_cnt - duty;
00196
00197         PORTA.PODR.BIT.B7 ^= 1U;
00198
00199         delay_loops(k_duty_hold_loops);
00200
00201         if (direction != 0U) {
00202             duty += (uint32_t)k_duty_step;
00203             if (duty >= (uint32_t)k_pwm_period_cnt) {
00204                 duty    = (uint32_t)k_pwm_period_cnt;
00205                 direction = 0U;
00206             }
00207         } else {
00208             if (duty <= (uint32_t)k_duty_step) {
00209                 duty    = 0U;
00210                 direction = 1U;
00211             } else {
00212                 duty -= (uint32_t)k_duty_step;
00213             }
00214         }
00215     }
00216 }
```

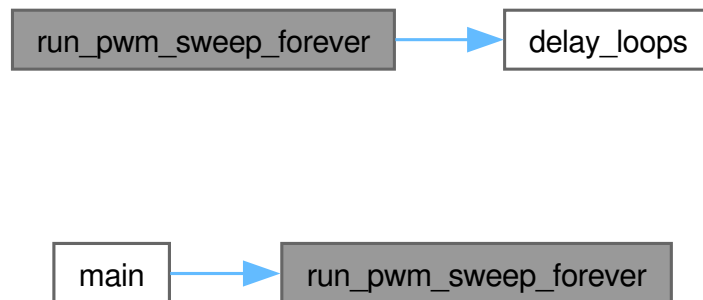

```
00001 /**
00002  * @file main.c
00003  * @brief 20 kHz PWM on GPTW0 using Renesas iodef.h register structs.
00004  *
00005  * @note **NOT NEEDED FOR PRODUCTION** (kept as an alternate-style reference).
00006  *       The STAR libs/rx_hal/src/rx_gptw.c HAL now produces clean 20 kHz PWM
00007  *       on P17/P23 after the 2026-04-19 HAL fixes (VERIFICATION_LOG.md).
00008  *       Use pwm_test_hal/ (HAL) or motor_spin_test/ (motor lib) for the real
00009  *       path; they go through our verified libs/ code. This FIT-style
00010  *       variant is kept only as a reference to Renesas' iodef.h layout
00011  *       for future diagnostic work.
00012  *
00013  * @details
00014  * "FIT-style" bring-up using the authoritative Renesas BSP register
00015  * definitions from
00016  * r_bsp/r_bsp_vx.xx/r_bsp/mcu/rx72n/register_access/gnuc/iodef.h
00017  */
```

```

00018 * That header is the same one every Renesas FIT driver builds against (the
00019 * public rx-driver-package has NO dedicated GPTW FIT driver -- the only code
00020 * in the whole package that writes GPTW registers is r_aerpoint_rx, and it
00021 * does so through this same iodefne with statements like
00022 *   MSTP(GPTW) = 0;
00023 *   GPTW1.GTCR.LONG = ...;
00024 *   R_MPC_Write(...);
00025 * so that is the "reference driver" pattern we mimic here.
00026 *
00027 * ### Pin map (Tom's PCB breakout -> GPTW0)
00028 *   - Tom header pin 34 -> P23 / GTIOC0A (scope Ch2, blue, "IN2")
00029 *   - Tom header pin 38 -> P17 / GTIOC0B (scope Ch1, orange, "IN1")
00030 *
00031 * ### Clocking (clock.c)
00032 *   - HOCO 16 MHz x 12 = 192 MHz PLL
00033 *   - ICLK 96 MHz, PCKA 96 MHz (GPTW source)
00034 *
00035 * ### PWM
00036 *   - Saw-wave mode (GTCR.MD = 000)
00037 *   - Period = 96 MHz / 20 kHz = 4800 counts -> GTPR = 4799
00038 *   - GTIOCA / GTIOCB driven with complementary duty for scope verification
00039 *
00040 * SPDX-License-Identifier: MIT
00041 * @copyright Copyright (c) 2026 Locked Inc.
00042 */
00043
00044 #include <stdbool.h>
00045 #include <stdint.h>
00046
00047 #include "iodefine.h"
00048
00049 extern void clock_init(void);
00050
00051 /* -----
00052 * PWM configuration
00053 * ----- */
00054 enum {
00055     k_pwm_pcka_hz    = 96000000U,
00056     k_pwm_freq_hz    = 20000U,
00057     k_pwm_period_cnt = 4800U,      /* PCKA / freq */
00058     k_pwm_gtpr       = 4799U,      /* period - 1 */
00059     k_pwm_duty_pct   = 2400U,
00060     k_duty_step      = 48U,
00061     k_duty_hold_loops = 40000U,
00062
00063     /* PSEL value for GPTW alternate function on Port 1 / Port 2 pins.
00064      * Matches the PSEL used by r_aerpoint_rx's GPTW pin init (0x1E there is
00065      * Port D specific; 0x14 is the documented GTIOCnA/B select for the P1x
00066      * and P2x pins in the RX72N MPC tables -- same value used by STAR's
00067      * rx_gptw.c HAL and by pwm_test/main.c today). */
00068     k_psel_gptw      = 0x14U,
00069 };
00070
00071 static inline void delay_loops(uint32_t n)
00072 {
00073     for (volatile uint32_t i = 0U; i < n; ++i) {
00074         __asm__ volatile("nop");
00075     }
00076 }
00077
00078 /* -----
00079 * Step 1: Release GPTW from module stop via MSTPCRA.MSTPA7.
00080 *
00081 * iodefne.h provides the canonical MSTP(GPTW) macro which resolves to
00082 * SYSTEM.MSTPCRA.BIT.MSTPA7 on RX72N. Writing 0 wakes the module.
00083 * This is the exact sequence used by r_aerpoint_rx's hardware init.
00084 * ----- */
00085 static void release_gptw_from_module_stop(void)
00086 {
00087     /* Unlock PRC1 (module stop protection) via PRCR.
00088      * PRCR requires the key 0xA5 in the upper byte. */
00089     SYSTEM.PRCR.WORD = 0xA502U; /* PRKEY=0xA5, PRC1=1 */
00090     MSTP(GPTW) = 0U; /* Expands to SYSTEM.MSTPCRA.BIT.MSTPA7 = 0 */
00091     SYSTEM.PRCR.WORD = 0xA500U; /* Re-lock */
00092 }
00093
00094 /* -----
00095 * Step 2: Route GTIOC0A -> P23, GTIOC0B -> P17 via MPC.
00096 *
00097 * Equivalent to what r_mpc_rx would do via R_MPC_Write() -- same register
00098 * sequence, direct. Port 1 / Port 2 pins route GPTW signals with PSEL=0x14.
00099 * ----- */
00100 static void route_gtioc0_to_p23_p17(void)
00101 {
00102     /* Unlock MPC PFS writes: clear B0WI, then set PFSWE. */
00103     MPC.PWPR.BIT.B0WI = 0U;
00104     MPC.PWPR.BIT.PFSWE = 1U;

```

```

00105
00106 /* PSEL = 0x14 selects GPTW alternate function. */
00107 MPC.P23PFS.BYTE = (uint8_t)k_psel_gptw; /* P23 -> GTIOC0A */
00108 MPC.P17PFS.BYTE = (uint8_t)k_psel_gptw; /* P17 -> GTIOC0B */
00109
00110 /* Re-lock PFS writes. */
00111 MPC.PWPR.BIT.PFSWE = 0U;
00112 MPC.PWPR.BIT.B0WI = 1U;
00113
00114 /* Switch the pads to peripheral mode so the GPTW output drives the pin.
00115 * We deliberately leave PDR alone -- the peripheral-mode pad is driven
00116 * by GTIOCN A/B's OAE/OBE bits from GTIOR. */
00117 PORT2.PMR.BIT.B3 = 1U; /* P23 */
00118 PORT1.PMR.BIT.B7 = 1U; /* P17 */
00119 }
00120
00121 /* -----
00122 * Step 3: Configure GPTW0 as a 20 kHz saw-PWM with complementary A/B.
00123 *
00124 * All register writes use iodef.h bitfields. Addresses / bit positions
00125 * come straight from the Renesas BSP header so we cannot mistype offsets.
00126 * ----- */
00127 static void configure_gptw0_pwm khz(void)
00128 {
00129 /* Unlock GPTW0 write protection. PRKEY=0xA5, WP bits cleared. */
00130 GPTW0.GTWP.LONG = 0x0000A500U;
00131
00132 /* Stop counter before configuring. GTCR.CST = 0 halts the counter. */
00133 GPTW0.GTCR.LONG = 0x00000000U;
00134
00135 /* Force count direction = up (UD=1) with UDF=1 to accept the write.
00136 * Without UDF, the UD bit write is ignored per the hardware manual. */
00137 GPTW0.GTUDDTYC.LONG = 0x00000003U;
00138
00139 /* Clear counter. */
00140 GPTW0.GTCNT = 0U;
00141
00142 /* Period: 4799 -> 20 kHz at 96 MHz PCKA. */
00143 GPTW0.GTPR = (uint32_t)k_pwm_gtp;
00144 GPTW0.GTPBR = (uint32_t)k_pwm_gtp;
00145
00146 /* Initial 50% duty on both channels for scope visibility.
00147 * GTCCRB = period - GTCCRA produces a mirror-image waveform on B. */
00148 GPTW0.GTCCRA = (uint32_t)k_pwm_duty_pct;
00149 GPTW0.GTCCRB = (uint32_t)(k_pwm_period_cnt - k_pwm_duty_pct);
00150
00151 /* GTIOR configuration using iodef bitfields.
00152 *
00153 * Per RX72N HW manual 26.2.14:
00154 * GTIOA/GTIOB = 0b01001 (0x09):
00155 * - Initial output LOW
00156 * - Low at compare match with GTCCRA/B while counting up
00157 * - High at cycle end (GTCNT reaches GTPR)
00158 * -> produces an active-high sawtooth PWM pulse of width GTCCRx.
00159 * OAE / OBE = 1 to actually drive the pad.
00160 *
00161 * Everything else zeroed (no dead time, no noise filter, no force-low). */
00162 GPTW0.GTIOR.LONG = 0U;
00163 GPTW0.GTIOR.BIT.GTIOA = 0x09U;
00164 GPTW0.GTIOR.BIT.OAE = 1U;
00165 GPTW0.GTIOR.BIT.GTIOB = 0x09U;
00166 GPTW0.GTIOR.BIT.OBE = 1U;
00167
00168 /* Enable single-buffer operation on GTCCRA/B and GTPR so writes
00169 * propagate on the next cycle boundary without glitching. Matches the
00170 * STAR HAL's tested configuration. */
00171 GPTW0.GTBER.LONG = 0x00050005U;
00172
00173 /* Select sawtooth PWM mode (MD=000), PCKA/1 (TPCS=0000), start (CST=1). */
00174 GPTW0.GTCR.BIT.MD = 0U;
00175 GPTW0.GTCR.BIT.TPCS = 0U;
00176 GPTW0.GTCR.BIT.CST = 1U;
00177
00178 /* Lock GPTW0 write protection. */
00179 GPTW0.GTWP.LONG = 0x0000A501U;
00180 }
00181
00182 /* Sweep GTCCRA/B in a triangle so the scope sees a 0..100..0% envelope. */
00183 static void run_pwm_sweep_forever(void)
00184 {
00185 /* PA7 heartbeat LED so we can see firmware is alive even if PWM is dead. */
00186 PORTA.PDR.BIT.B7 = 1U;
00187 PORTA.PODR.BIT.B7 = 0U;
00188
00189 uint32_t duty = 0U;
00190 uint32_t direction = 1U;
00191

```

```

00192     for (;;) {
00193         /* Buffered write -- propagates on next cycle boundary via GTCCRC. */
00194         GPTW0.GTCCRA = duty;
00195         GPTW0.GTCCRB = (uint32_t)k_pwm_period_cnt - duty;
00196
00197         PORTA.PODR.BIT.B7 ^= 1U;
00198
00199         delay_loops(k_duty_hold_loops);
00200
00201         if (direction != 0U) {
00202             duty += (uint32_t)k_duty_step;
00203             if (duty >= (uint32_t)k_pwm_period_cnt) {
00204                 duty = (uint32_t)k_pwm_period_cnt;
00205                 direction = 0U;
00206             }
00207         } else {
00208             if (duty <= (uint32_t)k_duty_step) {
00209                 duty = 0U;
00210                 direction = 1U;
00211             } else {
00212                 duty -= (uint32_t)k_duty_step;
00213             }
00214         }
00215     }
00216 }
00217
00218 int main(void)
00219 {
00220     clock_init();
00221     release_gptw_from_module_stop();
00222     route_gtioc0_to_p23_p17();
00223     configure_gptw0_pwm_khz();
00224     run_pwm_sweep_forever();
00225     return 0;
00226 }
00227
00228 /* -----
00229  * Stubs for symbols referenced by vectors.S (ThreadX ISRs, CMT0) that this
00230  * minimal firmware doesn't use. Prevents linker errors without dragging in
00231  * the full ThreadX library or a real CMT0 driver.
00232  * ----- */
00233 void _tx_thread_context_save(void) {}
00234 void _tx_thread_context_restore(void) {}
00235 void cmt0_isr(void) {}

```
