



ai sport africa

OPERATORS' STARTER GUIDE



Version 2.0

Effective September 2026



WHAT'S INSIDE

1

The Pixellot CMS

pg 1 - 16

Gaining Access

pg 1

Creating General Events

pg 3

Adding Team Rosters in the CMS

pg 10

Hiding Your Event from the OTT/App

pg 11

Monitoring Your Stream on the CMS

pg 11

Checking System Status

pg 12

Presets and the Manual Scoreboard

pg 13

The VPU Manager

pg 14

2

Event Days

pg 17- 29

System Testing

pg 17

Event Timings

pg 18

Mobile Setups

pg 19

Calibration Tickets

pg 21

Event Streaming & Shutdown

pg 22

Troubleshooting

pg 23

Opening Tickets

pg 27

Event Day Checklist

pg 28



The Pixellot CMS

Gaining Access

To access the CMS, you must either:

- Request admin access via the AI Sport Africa team, or
- Be granted access to a specific CMS club (as a general operator)

CMS club - a digital profile representing a specific sports club or organization. It serves as a space where information and VODs (Video On Demand) related to the club are stored and managed.

Admin Access

To request admin access, open a Ticket with the AI Sport Africa team by **sending an email** to **support@aisport.africa**

Subject: CMS Admin Access

Email Body:

Include the following information:

- The email address of the person requiring access
- The name of the CMS tenant they need admin access to

Club Access

If someone already has **admin access** to your tenant on the Pixellot CMS, they can grant club access by adding your email address to the appropriate club:



1. Log in to the CMS
2. Click on the **"Clubs"** tab (right-hand side)
3. Find the relevant club
4. Click the **pencil (edit)** icon for that club
5. Add the operator's email address in the **"Admin(s)"** field
6. Save the changes

Next Steps


1. An invitation email will be sent from **donotreply@pixellot.tv** (Check spam/junk folders).
2. Click on **"Accept Invite"** in the email, which redirects to the CMS home page.
3. Complete the form with:
 - **Full Name**
 - **Email address** (same as originally provided)
 - A **password** of your choice
4. Click **"Create Account"**

The Pixellot CMS

Gaining Access

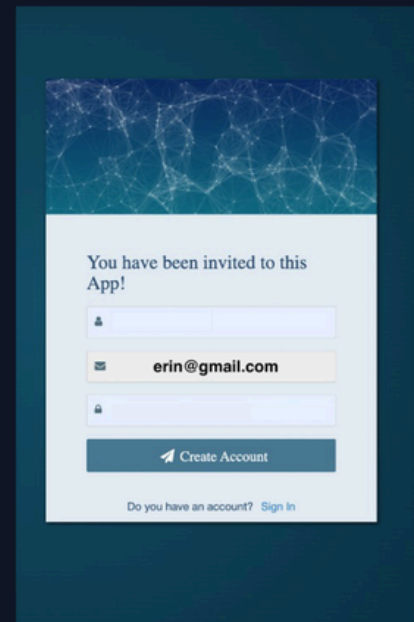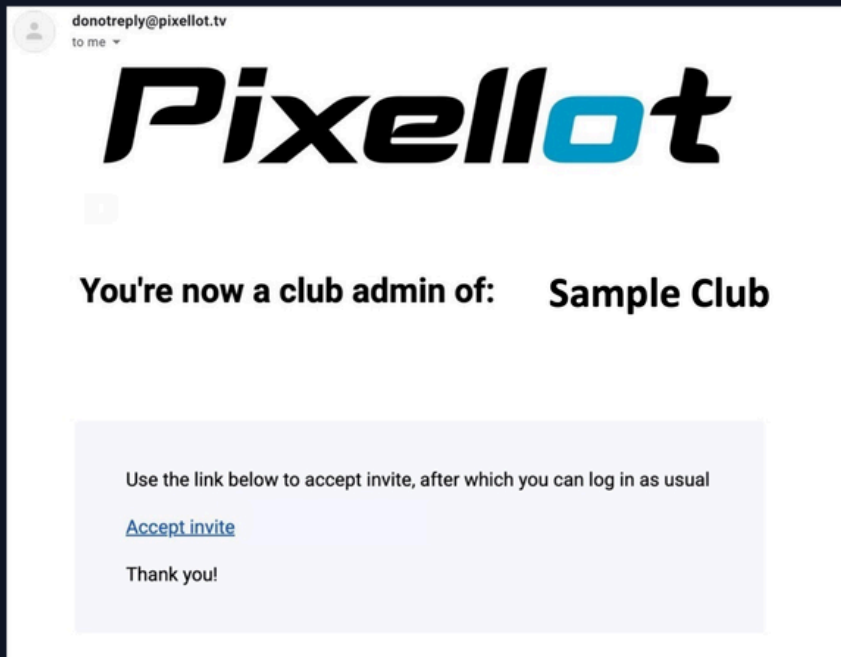

You may then be redirected to another Pixellot page where you must click “**Accept Invite**” again.

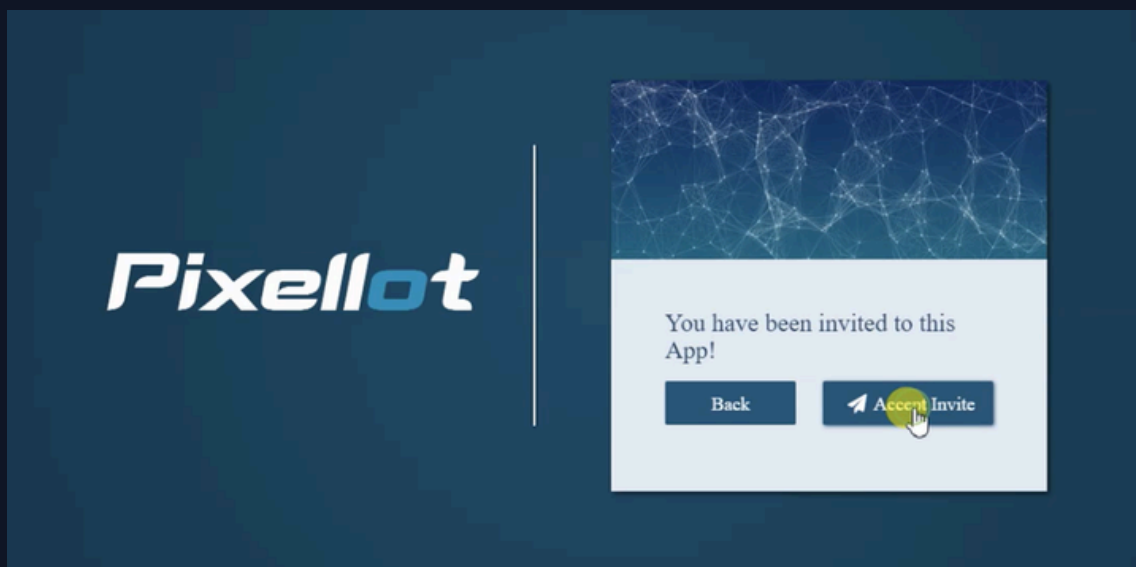


If not automatically logged in, go to: <https://club.pixellot.tv/> and log in with your new credentials.

The Pixellot CMS

Creating General Events

Event - a specific sports game, match, competition or event that is scheduled to be recorded, or that has already been recorded, and can be managed within the Pixellot CMS.

1. **Log in** to the Pixellot CMS at <https://club.pixellot.tv/> using your login credentials.
2. Click on the “**Events**” tab in the left-hand menu.
3. Click the **plus (+) icon** in the bottom-right corner of the screen.
4. This will open the **event creation page**, where you can fill in the details based on your specific event.

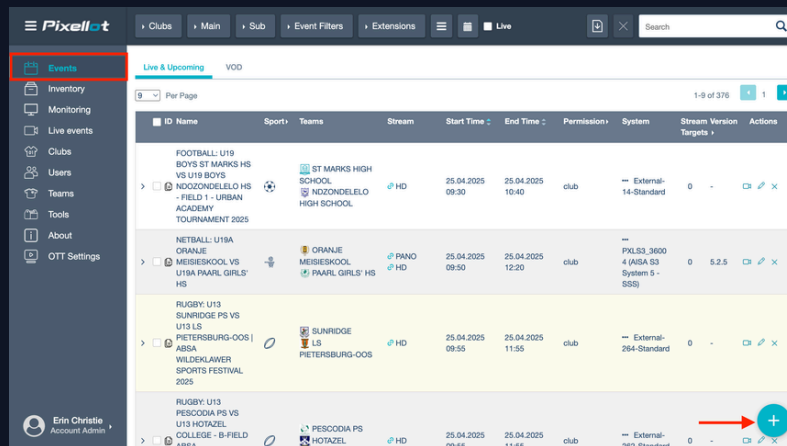

GENERAL

- Name** Your project should have a standardised event naming convention.
- Club** The club under which you want your event to be grouped
- Sport Type** The sport type of the event.
(Dictates the AI tracking algorithm and the scoreboard type)
- Venue** The camera system that will be used to stream your event
(e.g. PXLS3_36005)
- Game Type** Always game
- Auto Production** Auto Camera

General

Name

HOCKEY: U19A TEAM A VS U19A TEAM B

☐ Hide event from OTT

Club

St Stithians College Hockey (Red)

x

▼

Sport Type

Field Hockey

x

▼

Venue

PXLS3_36005 (AISA S3 System 2 - St Stithians Hockey Red)

Game Type

Game

Auto Production


Auto Camera

The Pixellot CMS

Creating General Events

GENERAL


Start Date	Event Date
Start Time (HH:MM)	Stream start time (see the <i>AISA Recommended Scheduling section pg8</i>)
End Date	Event Date
End Time (HH:MM)	Stream end time (see the <i>AISA Recommended Scheduling section pg8</i>)
Province	SSS only: Province where the event is taking place
Home Team	Home team (as per the fixture information)
Guest Team	Away team (as per the fixture information)
Team Roster	(see the <i>Adding Team Rosters section pg10</i>)
Game Score	Leave blank

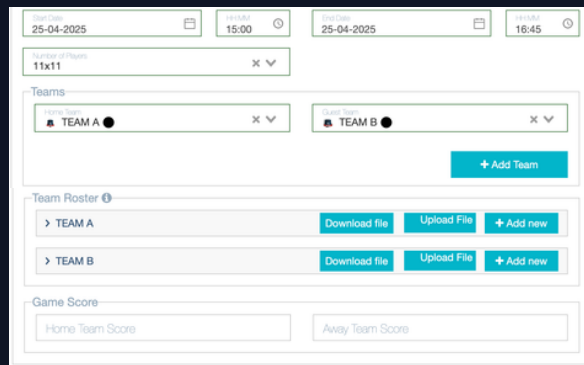

The screenshot shows the 'General' event form. At the top, there are date and time pickers for 'Start Date' (25-04-2025) and 'Start Time' (15:00), and 'End Date' (25-04-2025) and 'End Time' (16:45). Below these is a 'Number of Teams' dropdown set to '11x11'. The 'Teams' section has two dropdowns for 'Home Team' (TEAM A) and 'Guest Team' (TEAM B), with an '+ Add Team' button. The 'Team Roster' section has two rows for 'TEAM A' and 'TEAM B', each with 'Download file', 'Upload File', and '+ Add new' buttons. At the bottom, there are input fields for 'Home Team Score' and 'Away Team Score'.

OTT SETTINGS

Event Description	Leave blank
Categories	The categories under which the event will be stored on the OTT platform. Click " Add Categories ".
	Select the relevant main category and subcategory.
	An event can be categorised under multiple main categories and subcategories.

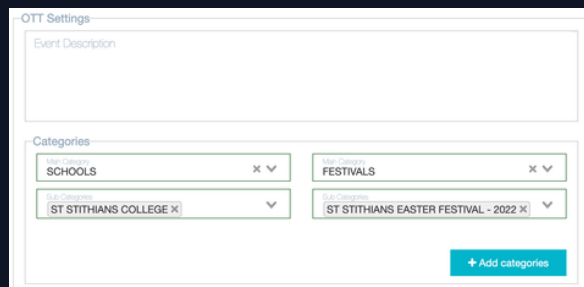

The screenshot shows the 'OTT Settings' form. It has a large text area for 'Event Description'. Below it is the 'Categories' section with two columns of dropdowns. The first column has 'Main Category' set to 'SCHOOLS' and 'Sub Category' set to 'ST STITHIANS COLLEGE'. The second column has 'Main Category' set to 'FESTIVALS' and 'Sub Category' set to 'ST STITHIANS EASTER FESTIVAL - 2022'. There is an '+ Add categories' button at the bottom right.

Note: If a team or category is not available for selection, please contact a tenant administrator to have it added.

The Pixellot CMS

Creating General Events

GEOLOCATION BLOCKING

PPV TICKETS

BETTING - LOW LATENCY

Leave these sections as is, or contact your AI Sport Africa representative for further information.

STREAM FORWARDING

If you'd like to stream to additional destinations beyond the Pixellot App and OTT platform, please refer to the [Adding Stream Forwarding section pg9](#).

Note: Stream Forwarding may incur additional costs. Please check with your AI Sport Africa contact before enabling this option.


SETTINGS

Leave out


PROVIDERS

Extensions

The chosen Pixellot graphics provider is Advance GFX. To add [Advance GFX](#) graphics to your stream, select "Add Extension" and choose Advance GFX.

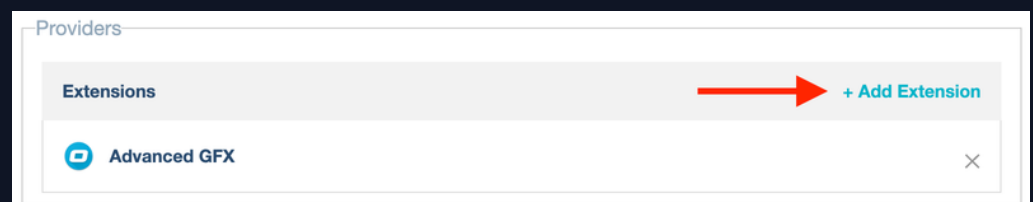

If your event is required to run for longer than 6 hours, you will also need to add the "[Extended Event Creator](#)" extension.

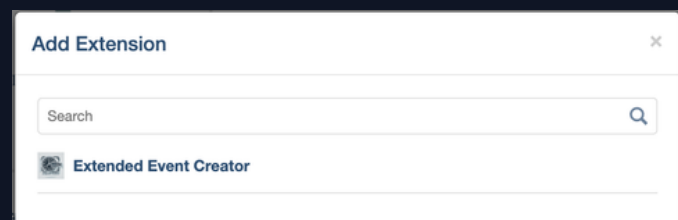

GRAPHICS


Skip the Graphics section; additional graphics (such as commercial adverts) are managed in the Advanced GFX backend. The Logo field is automatically populated from the club's logo. Leave Event Location and Sponsor's Banners blank.

The Pixellot CMS

Creating General Events

Saving your Event

Select "Save" to finish creating your event.



Select "Save and New" if you're scheduling back-to-back fixtures under the same club and venue.

- This will autofill key details for your next fixture, saving time.
- You'll just need to update the fixture name, start date, and start time.
- You can also adjust the teams if needed.

Note: The Pixellot system requires a 3-minute buffer between fixtures. The next fixture can only start 3 minutes after the previous fixture ends. See the [AISA Recommended Scheduling section pg8](#) for recommended timings for back-to-back fixtures.

After a fixture is created, the following can be edited up to 5 - 7 minutes before the event starts:



- Event name
- Start and end times
- Teams
- Categories

Tip: The Quick Edit button makes these changes easier to manage. To access it, click on an empty area around the event. This will open the event panel below, where you can view key event details and select Quick Edit.



The end time can be edited up to 1 minute before the event concludes.

Once the event is completed, you can still edit the event name, teams, and categories by accessing the event VOD. To make changes, click the pencil icon on the right-hand side of the event listing.

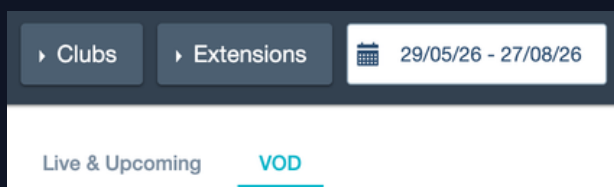

When searching for an event, use the pop-up filters at the top of the CMS screen to filter by club, extension, or date.

The Pixellot CMS


Creating General Events

Accessing your Scoring Link

If you have added [Advanced GFX](#) as an extension to your event, you can access the [Graphic Control URL](#) (scoring link) and [Graphic Overlay URL](#) (overlay link) from the event panel.

1. Click on an empty area around the event to open the event panel below.
2. Under VAS, locate [SportVot](#) as the Overlay Provider.
3. Click SportVot to open the graphics panel.
4. Use the copy icon to copy either the Graphic Control URL or the Graphic Overlay URL, then paste the link into a new browser tab.

The Graphic Control URL is used for scoring, while the Graphic Overlay URL is used to view the graphics overlay on the stream.

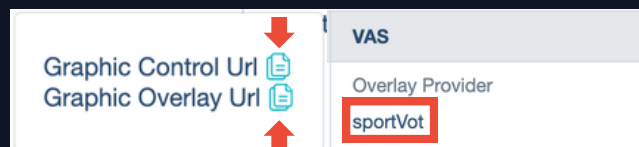


Additional Event Naming Notes

Two teams from the same school, club or province

If two teams from the same school, club or province are playing each other, the CMS will not allow you to select the same team name twice.

To create the fixture:

- Select the school or province as the first team.
- Select “Team 1” or “Team A” as the second team.

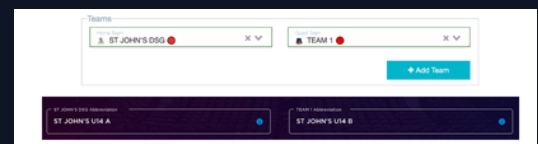


On event day, open the scoring page and rename the teams so that the scoreboard displays the correct team names (for example, St John’s U14 A and St John’s U14 B).

Creating Events for Playoff Games

At tournaments, playoff fixtures are often scheduled before the participating teams are confirmed. For example, the finalists may not be known until the earlier matches have been completed. You can still create these events in advance by using “Team 1” (or “Team A”) and “Team 2” (or “Team B”) as placeholders.

Once the teams have been confirmed, update:

- the event name, and
- the team names,

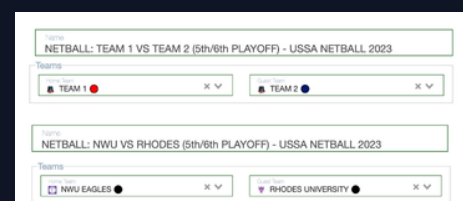

so that the fixture and scoreboard display the correct teams.

The Pixellot CMS

Creating General Events

AISA Recommended Scheduling for Back-to-Back Fixtures

Back-to-back fixtures can be challenging when there is limited time between matches. Pixellot systems need time to initialize before a stream can go live, so fixtures cannot be scheduled to overlap. Overlapping events often result in deleted or interrupted streams, which can cause you to miss the end of one match, the start of the next, or both.

To minimise this risk, AI Sport Africa recommends the following [scheduling convention for back-to-back events](#):

1. Schedule the first event of the day to start 5 minutes before the fixture kickoff.
2. Schedule each event to end 15 minutes after the expected end time of the fixture (or 15 minutes after the scheduled start time of the next fixture).
3. Schedule the next event to start 10 minutes after the previous event has been scheduled to end.

On event day

Adjust fixture times in the CMS to reflect what is happening in real time:

- When a match ends, edit the event to [end in 1 minute](#) from the current time.
- Then edit the next fixture to [start 3 minutes after the updated end time](#) of the previous event.

If matches start immediately after one another, you may still miss the first 1–2 minutes of the next match, but this approach greatly reduces the risk of missing the end of the previous match.

Tip: The Quick Edit button makes these time adjustments much easier to manage.



Note: This scheduling method means the fixture times displayed on the OTT platform and Pixellot App will not reflect the actual match start times. You can choose to hide upcoming fixtures until they go live to avoid displaying incorrect times, but hidden fixtures will not appear on the OTT platform or app until they are unhidden. You'll need to weigh the trade-off between accurate displayed times and fixture visibility.

The best solution is to work with the event organisers to schedule larger gaps between fixtures, allowing enough time for the Pixellot system to initialize and ensuring a smoother streaming experience with minimal risk of missing any part of a match.

The Pixellot CMS

Creating General Events

Adjusting Event Times

Event start times can be edited until the event enters initialization, which usually **begins 5–7 minutes before the event goes live**. Once initialization has started, the event start time can no longer be edited.

Note: Only one event can be scheduled on a system over any given time period. If you adjust event times so that two events overlap, the system will delete one of the overlapping events.

Fixtures Starting Early

- **Before initialization:** Adjust the start and end times as needed. For back-to-back events, work from the first event down.
- **During initialization:** The first part of the fixture may be missed. Adjust the start and end times of any upcoming events as required.

Fixtures Starting Late

- Adjust the event times **working backwards** from the last event up to avoid overlapping events.
- If the first event is already initializing, its start time cannot be changed, but its end time can still be adjusted.

If necessary, unlist the first event and set its end time to 1 minute after the new start time. Once the event has ended, recreate it using the correct start and end times.

Fixtures Running Late


At half-time, check whether the fixtures are running on schedule.

If there is a delay, adjust the current event's end time and the start/end times of upcoming events. **Work backwards** from the last event up, applying the delay to each fixture.

Adding Stream Forwarding

To add stream forwarding to a CMS event, open the event's Event Creation page.

1. Under Stream Forwarding, click [Add Stream](#).
2. Enter a Stream Name (for internal reference only).
3. Select the appropriate Stream Target.
4. If the target is not listed, select SRT Push (recommended).
5. Enter the Target URL and Stream Key.
6. Click Save.

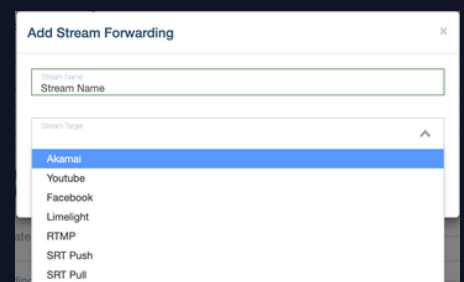

Note: Stream Forwarding may incur additional costs. Please check with your AI Sport Africa representative before enabling this option.


The Pixellot CMS

Adding Team Rosters in the CMS

Team rosters can be added in the CMS at either the Event Level or Team Level (if a Sport Type has been selected for the team).

The process is the same for both and can be done in two ways:

- Using a CSV template for bulk upload
- Manually, by adding players individually

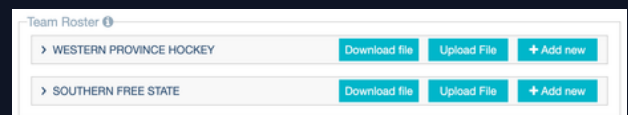

CSV Template

1. Download the CSV template by clicking “Download File.”
2. Once downloaded, filling out the template is straightforward:

- Column 1: Player's First Name
- Column 2: Player's Last Name
- Column 3: Jersey Number
- Column 4: Position

First name	Last name	Jersey number	Position
Player 1	Last Name 1	1	Goalkeeper
Player 2	Last Name 2	2	Defender
Player 3	Last Name 3	3	Midfielder
Player 4	Last Name 4	4	Striker


3. Once all players have been added, save the CSV file and upload it back into the system.

Manually

To add players individually,

1. Click the “+ Add New” button
2. A pop-up window will appear with four fields to complete for each player:

- First Name
- Last Name
- Jersey Number
- Position

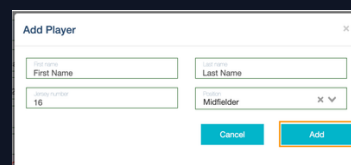

3. Once the information is entered, click “Add” to save the player’s details.
4. To add another player, simply click the “+ Add New” button again.

Viewing and Editing your Rosters

By clicking on your team, you can view, edit (using the pencil icon), or delete (using the cross icon) the players that have been added. These changes can be made as many times as needed until your Advance GFX scorelink is started. **Once the scorelink has started, any adjustments must be made directly through your Advance GFX scorelink.**



First name	Last name	Jersey number	Position	Status	Actions
Player 1	Last Name 1	1	Goalkeeper	✓	 
Player 2	Last Name 2	2	Defender	✓	 
Player 3	Last Name 3	3	Midfielder	✓	 

The Pixellot CMS

Hiding Your Event from the OTT

If you're experiencing technical issues or want to temporarily (or permanently) remove an event from the OTT platform and Pixellot App without deleting it, select the "Hide Event from OTT" checkbox on the event creation page.

☒ Hide event from OTT

Important: After selecting the checkbox, scroll to the bottom of the page and click **Save**.

You can also enable or disable this option using Quick Edit.

When an event is hidden, it will not appear on the OTT platform or Pixellot App. To make it visible again, simply untick the checkbox and save the event.


Monitoring Your Stream

It is best practice to monitor your live stream throughout the event so that any issues can be identified and resolved as quickly as possible.

You can monitor the stream through both the Pixellot CMS and the OTT platform/Pixellot App.

Monitoring via the CMS

1. Go to the Events tab.
2. Find your live event.
3. Click the camera icon on the right-hand side of the event.

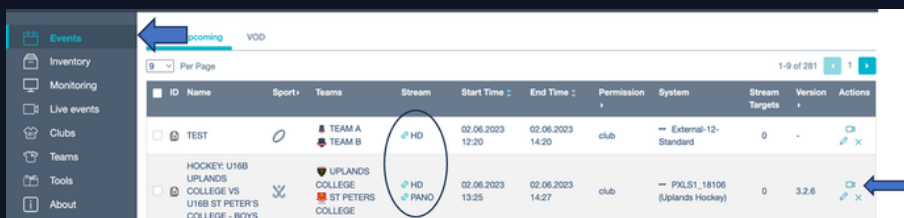

ID	Name	Sport	Teams	Stream	Start Time	End Time	Permission	System	Stream Targets	Version	Actions
TEST			TEAM A TEAM B	HD	02.06.2023 12:20	02.06.2023 14:20	club	External-12-Standard	0	-	
HOCKEY U16B			UPLANDS COLLEGE	HD	02.06.2023 13:25	02.06.2023 14:27	club	PXLS1, 18106 (Uplands Hockey)	0	3.2.6	

If the internet connection is poor, the system may only be pushing the HD stream, while the Pano stream may be unavailable.

A live preview will open, allowing you to monitor the stream being sent to the OTT platform and Pixellot App. Pay particular attention to:

- AI tracking
- Audio quality
- Graphics and score overlays

Note: The CMS preview is typically delayed by approximately 45 seconds.

The Pixellot CMS

Checking System Status

To check the status of your Pixellot system:

1. Log in to the Pixellot CMS.
2. Click the Monitoring tab in the left-hand menu.
3. Locate your system in the list of systems you have access to.

The system status will indicate its current condition.

Status guide

- **Offline** – The system is offline, usually due to a power or internet issue.

> HOCKEY: U19A EL...	PXLS1_32547 (SSS System 54 - JHB)	21:59:22	-	Offline	-	-	-	-	-	-
----------------------	---	----------	---	---------	---	---	---	---	---	---

- **Sleep** – Before your first event (up to approximately 15 minutes before the scheduled start time), the system should show:

- Status: Sleep
- Connection: Connected
- Camera: Good
- CPU & GPU : OK / OK

Name	System	Live Streams	Stream Status	Status	Connection	Camera	Health	Cloud	CPU / GPU	HD / Pano	Actions
HOCKEY: U...	PXLS2_31696 (St Mary's Waverley Hockey/Water polo) 	03:22:18	-	Sleep	Connected	Good	-	-	Ok / Ok	Error / Error	

- **Live** – Once streaming has started, the status should change to Live, and all indicators should be green.

Name	System	Live Streams	Stream Status	Status	Connection	Camera	Health	Cloud	CPU / GPU	HD / Pano	Actions
Rhenish Ho...	PXLS1_32492 (Rhenish Hockey) 	 HD  Pano		Live	Connected	Good	Ok	Created	Ok / Ok	Ok / Ok	

- **Reset** – Between fixtures, the system may temporarily enter Reset and display Health Error and HD/Pano Error. This is normal while the system initializes and should clear once the next stream goes live.

Name	System	Live Streams	Stream Status	Status	Connection	Camera	Health	Cloud	CPU / GPU	HD / Pano	Actions
HOCKEY: U...	PXLS1_19616 (St Stithians Hockey Red) 	Unavailable	-	Reset	Connected	Good	Error	Created	Ok / Ok	Error / Error	

An unstable internet connection may cause a **Pano Error** by interrupting the panoramic feed. The HD stream will usually continue streaming normally, but it's worth monitoring the network connection.

Name	System	Live Streams	Stream Status	Status	Connection	Camera	Health	Cloud	CPU / GPU	HD / Pano	Actions
Test Event ...	PXLS2_61449 (Monnas Netball) 	 HD  Pano		Live	Connected	Low FPS	Ok	Created	Ok / Ok	Ok / Error	

If your system status is not as expected at any stage, begin basic troubleshooting as soon as possible or contact your AI Sport Africa representative for assistance.

The Pixellot CMS

Presets & the Manual Scoreboard


Sometimes the sporting action only takes place on half of the designated field. This typically happens when younger age groups play mini-games, or during shootouts/strokes (hockey) or penalties (soccer). It may also occur during an awards ceremony held at the center of the field. In these cases, the AI Sport Africa Support Team will add PRESETS to the camera. Presets override AutoProduction/AutoTracking and allow the system to focus on a specific section of the field.

You select the section to focus on by choosing a preset through the Manual Scoreboard.

The most important thing to remember is that preset selection is based on the orientation of the CHU. Therefore, it is best to sit on the same side as the CHU so that your left and right align with the CHU's perspective. This ensures that selecting "right" or "left" corresponds correctly to the field's sides.

To access the manual scoreboard you:

1. Find your event and click on the edit "pencil" button.
2. You then scroll down to the bottom of the Graphics section where you will find the Manual Scoreboard Link.
3. You copy the link- using the copy button- and paste it in a new web tab. The Manual Scoreboard will load.

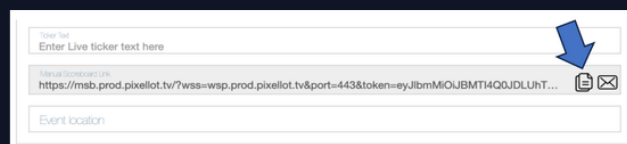


Enter Live ticker text here

Manual Scoreboard Link
<https://msb.prod.pixellot.tv/?wss=wsp.prod.pixellot.tv&port=443&token=eyJlbmMiOiOUJBMTH4Q0JDLUht...>

Event location

Note: You only use the manual scoreboard to select the preset. You continue to score using the usual Advance GFX scoring link.

4. At the bottom of the Manual Scoreboard, you select the preset you are going to use. You will be asked if you are sure about your chosen preset – you click "ok".

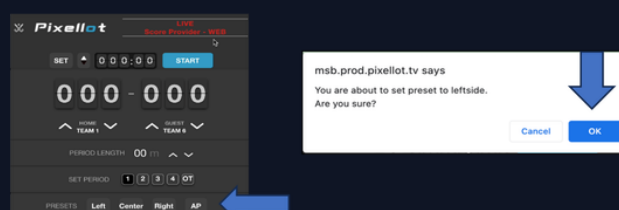

Pixellot LIVE Score Production - WEB

SET 000 - 000 START

PERIOD LENGTH 00

SET PERIOD 1 2 3 4 OF

PRESETS Left Center Right AP

msb.prod.pixellot.tv says
 You are about to set preset to leftside.
 Are you sure?
 Cancel OK

If a penalty occurs during play, select a preset to keep the camera focused on the penalty. Once the penalty has been completed, wait until the players begin running back before **re-selecting AP**. Re-selecting AP too early may cause the camera to move away from the action before it has fully concluded.

The Pixellot CMS

The VPU Manager

Accessing the VPU Manager

You can access the VPU Manager from either the Events tab or the Monitoring tab.

From the Events tab

1. Go to the Events tab.
2. Click the three dots above the system name.
3. In the menu that appears, click the VPU icon to open the VPU Manager.

ID	Name	Sport	Teams	Stream	Start Time	End Time	Permission	VPU	System Version	Actions
>	HOCKEY: WP PENINSULAR VS SA HOCKEY -U21 IPT FINALS 2026		WP PENINSULA SA HOCKEY	PANO HD	12.08.2026 13:40	12.08.2026 15:25	club	***	PXLS1_19623 (SSS System 39)	0 5.21.8

From the Monitoring tab

- Go to the Monitoring tab.
- Click the VPU icon next to the system name.


Name	System	Live Streams	Stream Status	Connection	Camera	Health	Cloud	CPU GPU	HD Pano	Actions
> HOCKEY: WP PENI...	PXLS1_19623 (SSS System 39)	HD Pano	● Live	Connected	Good	Ok	Created	Ok / Ok	Ok / Error	

Note: The VPU Manager can only be accessed when the system is online with stable network.

VPU Manager Dashboard

The VPU Manager Dashboard provides a quick overview of the connection between the VPU and the CHU.

Under **System Connection Diagram**, both Internet and CHU should display a green tick.

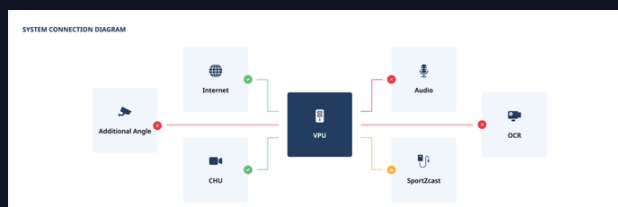

Under POE Status:

- **S1 systems:** All 4 POE ports should be green and connected at 1000 Mbps.
- **S3 systems:** Only 1 POE port is active, and it should be green and connected at 1000 Mbps.

POE port	Status	Speed (Mbps)
1	✓	1000
2	✓	1000
3	✓	1000
4	✓	1000

The Pixellot CMS

The VPU Manager

Accessing Frames

1. In the VPU Manager, select **System Setup**, then **Head Setup**.
2. The setup frames will be displayed.

Note: The frames may take a few moments to load.

In general, frames can be approved when they meet the following requirements:


- All four corners of the field of play are visible.
- All four boundary lines are clearly visible.
- The field of play is centred within the frames.
- There is equal free space above and below the field of play.



Adjusting Stream Brightness

Changes in natural light can affect the brightness and quality of your stream. The system automatically adjusts brightness in most cases, but you can make manual adjustments if needed.

1. In VPU Manager, select **System Setup**, then **Head Setup**.
2. Wait for the camera frames to load.
3. Under **Light Control**, adjust the Brightness slider until the image appears correctly exposed.

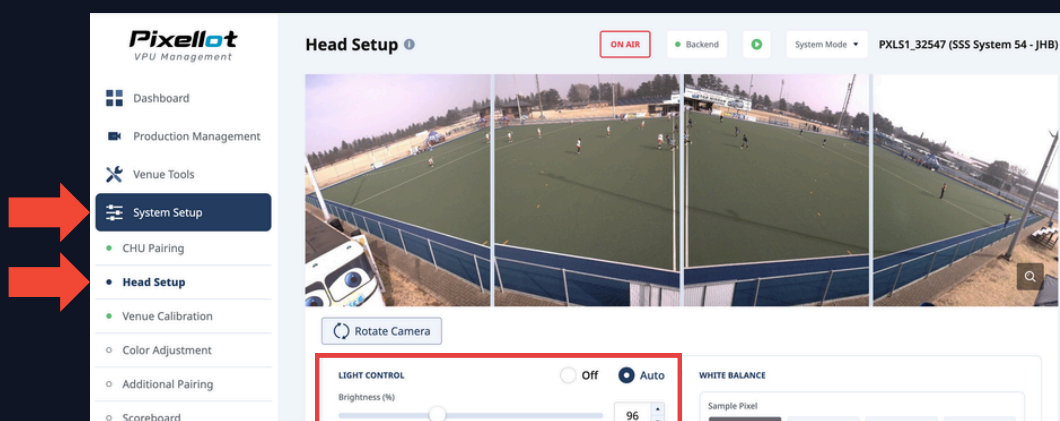


The Pixellot CMS

The VPU Manager

Performing a Graphics Reset

If your overlay link is active but no graphics are appearing on the stream, you may perform a Graphics Reset.

1. In VPU Manager, select **Venue Tools**, then **Maintenance**.
2. Click **Run** next to Graphics Reset.
3. Wait for the reset to complete and check whether the graphics are displaying on the stream.

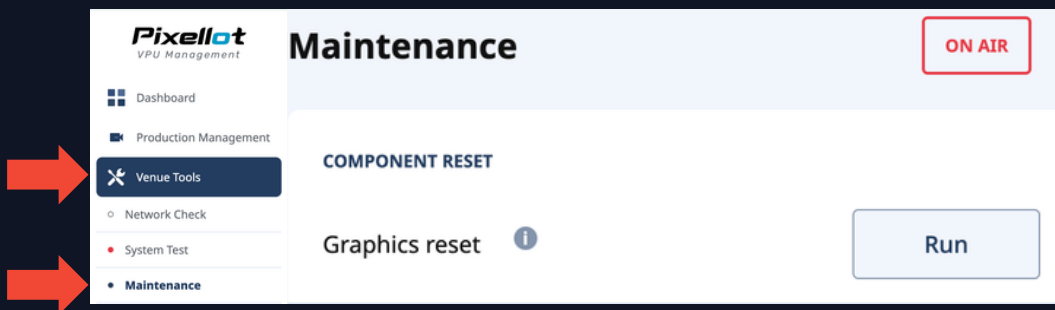

Pixellot
VPU Management

Please wait...

Event Days

System Testing

Mobile Systems

Before deploying your mobile system for the next event, it's important to ensure everything is in working order after your previous event.

You can do this by following these steps:

1. Get your system online and raise an **error clear ticket** with the AI Sport Africa Support Team.
2. **Run the usual system tests:**
 - a. Network check (VPU Manager → Venue Tools → Network Check)
 - b. System test (VPU Manager → Venue Tools → System Test)
 - c. 30-minute test event (check graphics functionality).
3. **Scan through the test event** to identify and address any obvious issues.
4. Address any **hardware or equipment issues** before the next event day.

Fixed Systems

For fixed systems, it is strongly recommended to run a series of tests ahead of event day to ensure everything is functioning correctly.

These checks should typically include:

- Network check (VPU Manager → Venue Tools → Network Check)
- System test (VPU Manager → Venue Tools → System Test)
- 30-minute test event to confirm graphics and sound functionality

After the test event, review the VOD to check the sound and identify and address any obvious issues.

Your AI Sport Africa contact will inform you of any necessary software upgrades, which can be completed during your weekly system checks.



Event Days

Event Timings

Timings Mobile

To ensure a smooth event day, follow the timeline below for mobile setups:

- Arrive at the venue **at least 2.5 hours before** your first fixture.
- The **AI Sport Africa team** will be on standby to assist **from 2 hours before** your first fixture
- Set up your mobile system in the **designated location**, as identified during the site survey.
- **Check and verify the camera frames** and make any necessary adjustments.
- After setting up and ensuring frames are verified, stabilisation ropes should be tightened.
- **Log a calibration ticket** with the AI Sport Africa Support Team no later than **1.5 hours before** your first fixture. Calibration can take anywhere from 20 minutes to 1 hour, depending on your setup.
- Once the calibration ticket is logged, **do not physically adjust or move the system**. If the system is moved, a new calibration ticket will need to be opened.
- Once calibration is confirmed as complete, **run a short, hidden test event** to ensure both the **system** and **audio** are functioning correctly.

Timings Fixed

To ensure a smooth event day, please follow the timeline below for **fixed setups**:

- Arrive at the venue **at least 1.5 hours before** your first fixture.
- Check that the fixed system is **online and fully operational**.
- **Run a short, hidden test event** to confirm that both the system and audio are functioning correctly.



Event Days

Mobile System Setup

You should have been trained on how to set up a mobile system. The points below are **key reminders** only and do not cover the full setup process. If you are unsure about any part of the setup, please contact your **AI Sport Africa representative before event day**.

Before Event Day

A **site survey** should be conducted at the event venue before event day to identify the optimal setup location and ensure the best possible coverage. AI Sport Africa will assist with recommending the ideal positioning and setup specifications, including **camera height and standoff distance**.

Setup


- Set up the mobile system on the **halfway line**, with a minimum standoff distance of approximately **4m**, with **6m** or more being ideal.
- Secure the **CHU** to the tripod.
- **Before extending the tripod**, plug in the **VPU** and connect the **router**, ensuring the connection lights are **green and orange**.
- Connect the **extender cables to the VPU one connection at a time** ($S1 = 4 \times \text{connections}$ / $S3 = 1 \times \text{connection}$), checking the connection lights after each connection. The lights should be **green and orange** to confirm a successful connection.
- Once all connections are checked and working correctly, fully extend the tripod to approximately 4.7 m – **height is your friend!** Where possible, use scaffolding or a nearby elevated structure.
- For S1s, connect the **sound box** to the VPU, then use the **Y-cable** to connect the microphone cable from the CHU to the sound box.
- Once the mobile system is fully set up, **check your frames** (see [Accessing Frames pg15](#)) and make any necessary adjustments.
- Once you are happy with the framing, you can **submit a calibration request**.

Note: If using ropes to secure the tripod, ensure the ropes are attached to the tripod before it is raised. Once the frames have been checked and confirmed to look good, secure the ropes in position before raising a calibration ticket.



S1 Ambient Sound Box Settings

- Set all **dials to the 1 o'clock position**.
- All buttons should be out, except **Direct Monitor**, which should be **pushed in**.
- On the back of the sound box, ensure **48V** is switched **ON**.

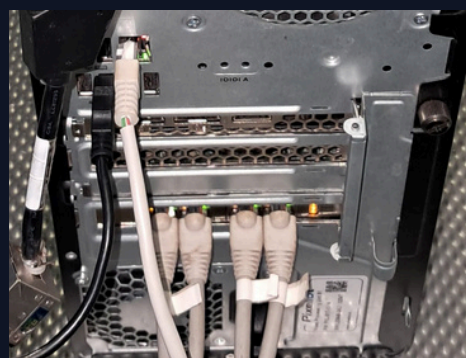


Event Days

Mobile System Setup

Mobile System Setup

Height = measure from the ground to the centre of the CHU.

Standoff = measure from the sideline to the front of the CHU.

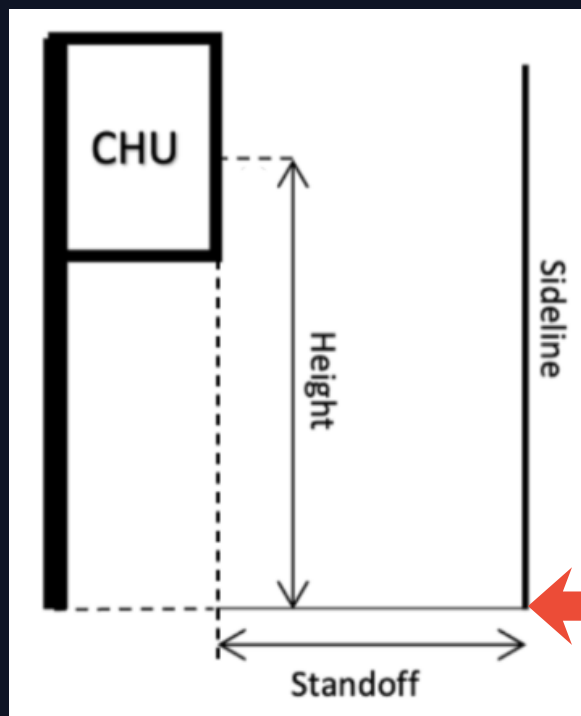

Field of play centre line

Minimum Standoff: 4 m (6 m+ is preferable)

Minimum Height: 4.7 m (fully extended tripod; additional height is preferable)

Note: Prioritize a clear, centered, and unobstructed view of the entire playing surface. Incorrect height or placement can cause poor framing, missed action, or disorientation in the stream.

S3 Commentary Setup

1. Plug in the sound box.
2. Connect the sound box to the VPU via USB.
3. Connect the mic XLR cables to Input 1 and Input 2.
4. Set all dials to the 1 o'clock position as a starting point. These can be adjusted based on commentary quality.
5. Ensure all buttons are out, except **Direct Monitor**, which should be pushed in.
6. On the back of the sound box, ensure 48V is switched ON.



Event Days

Calibration Tickets

A calibration ticket must be logged before the scheduled stream go-live time:

- **S1 systems:** At least 1 hour before go-live.
- **S3 systems:** At least 2 hours before go-live.

When submitting a calibration request, please include the following information:

Ticket Title

First Message (WhatsApp) / E-mail Subject:

- System Name – e.g. PXLS3_36023 (System 1)
- Request Type – Calibration Request
- Sport – e.g. Rugby, Soccer, Hockey, etc.
- Event Start Time – e.g. 08:00

Ticket Info

Second Message (WhatsApp) / E-mail Body:


- Frames Screenshot
 - Field centred in the frame, with equal free space above/below and on both sides
 - All field corners and lines clearly visible
 - No obstructions in the frame
- Standoff and Height Distances – especially important for S3 systems
- Specialised Field Dimensions – if the field size is non-standard



+27 83 611 3591



SUPPORT@AISPORT.AFRICA

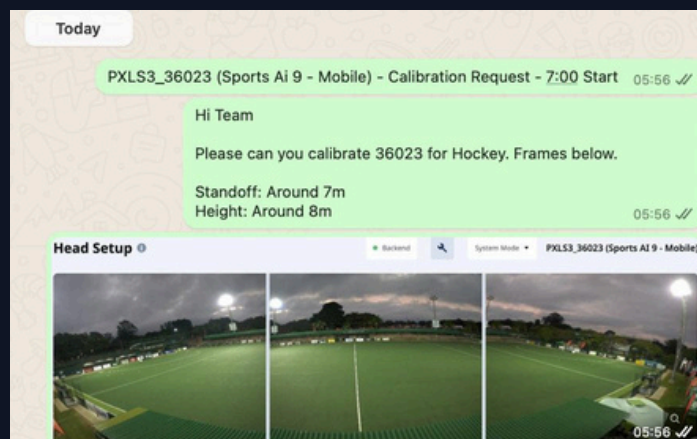

Event Days

Event Streaming & Shutdown

- The event will start streaming automatically once the scheduled start time is reached in the CMS.
- Open your Scorelink to initiate the on-stream graphics (See [Accessing Your Scorelink pg7](#)).
- Monitor the stream throughout the event so that any issues can be identified and troubleshooted as quickly as possible (See [Monitoring Your Stream pg11](#)).

IMPORTANT: A stable internet connection and power supply are essential for a successful live stream.

Ending the Event

The event will stop streaming automatically once the scheduled end time is reached.

Once your final fixture has ended:

1. End the event in the CMS (or adjust the end time to 1 minute time)
2. Keep the system online for at least 10 minutes to allow background processes to complete.
3. After 10 minutes, shut down the system and begin packing up.
4. Ensure all equipment is packed neatly and securely in its designated flight case.
5. Any wet or damaged equipment should be assessed as soon as possible after the event.

HDHQ Uploads

If you experienced network issues during any of your events, a full HDHQ version of the stream will have been recorded locally on the VPU.

To upload these recordings to your OTT platform and make them available as HDHQ VODs, simply reconnect the system to a stable network connection after the event. The recordings will upload automatically.

 PANO
 HD HQ



Event Days

Troubleshooting

If you notice that your stream is not available or is not running smoothly and is likely to provide an unpleasant viewing experience, it is best to hide your event from the OTT (see *Hiding Your Event from the OTT pg11*).

Troubleshooting Power and Network Issues

A stable power supply and network connection are essential for the system to function correctly. These should be the first things you check if any issues arise.

Important: Power and network issues cannot be resolved remotely and are the responsibility of the on-site team.

Checking Power

Check the back of the VPU for connection lights:

- If the router or CHU is connected, you should see lights at the corresponding connection points on the back of the VPU.
- If there are no lights, there is most likely no power reaching the system.
- Check the power plug and power source first.
- If the power supply is not working correctly, raise the issue with your venue.

Checking Internet

If the router is connected and the network is stable, you should see green and orange lights at the VPU's network connection point.

- Green + Orange: Good/stable network connection.
- Green + Green: Weak network connection.

You can also run a standard internet speed test using a laptop or mobile device connected to the same network to check the network performance.

Rebooting the Router and/or VPU

Rebooting the router and/or VPU can help reset the network connection and resolve streaming issues.

To reboot:

1. Unplug the power cable from the router/VPU.
2. Wait approximately 15 seconds.
3. Plug the power cable back in and allow the system time to restart and re-establish the network connection.

If power and network are stable but the issue persists after rebooting and troubleshooting, contact your AI Sport Africa representative for assistance.


Event Days

Troubleshooting

Checking the Connection to the CHU

Check the connection lights on the back of the VPU where the CHU extender cables are connected.

- Green + Orange: Good connection.
- No lights: No connection.
- Green + Green: Possible weak or unstable connection.

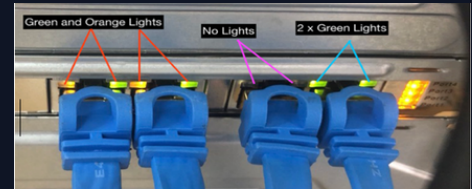

If you see no lights or green + green, follow the steps below to determine whether the issue is with the extender cable, VPU port, or CHU.

Check the connections

Check that the extender cables are connected correctly at both ends.

- Make sure all connections are fully inserted and secure.
- Check that the cables are not loose or visibly damaged.
- If possible, test with a known-good extender cable.

For S1 Systems

S1 systems have four extender cable connections between the CHU and VPU.

1. Identify a port that is showing a good connection (green + orange).
 2. Take the extender cable from the working port and connect it to the port that is showing no lights or green + green.
 3. Check the connection lights:
 - The lights now show a good connection: The issue is most likely with the original extender cable or the CHU connection.
 - The port still shows no lights/green + green: The issue is more likely with the VPU port or the CHU.
- If you suspect the extender cable is faulty, you can also swap it with the mic cable to test whether the cable is causing the issue.
 - You can also connect the CHU directly to the VPU, bypassing the extender cables. If the connection is restored, this confirms the issue is likely with the extender cables.

For S3 Systems

S3 systems have one extender cable connection between the CHU and VPU.

- Try another VPU port and check the connection lights again.
- If possible, replace the extender cable with a known-good cable and check the connection lights again.

If, after troubleshooting, the connection remains no lights or green + green, the issue may be with the CHU or VPU port. Contact your AI Sport Africa representative for further assistance.

Troubleshooting

Troubleshooting Graphics

No Graphics on the Stream

1. Make sure the scoring link has been started.
2. If the scoring link is active but graphics are not displaying, perform a Graphics Reset (See [Performing a Graphics Reset pg16](#)).
3. If the graphics still do not return, open a ticket with the AI Sport Africa Support Team.

Incorrect Graphics on the Stream

- **Wrong look:** Ensure the correct sportVot Template has been selected (see the separate [SportVot Guide](#))
- **Wrong or missing ads/logos:** Contact the person responsible for ad allocations in your project or your AI Sport Africa representative.

Stuck Trigger

Poor network connectivity can sometimes cause graphics to behave unexpectedly.

If an in-game trigger remains on the stream:


1. Go to the Overlay Controls section of your scoring link.
2. Select the Score option to clear the stuck trigger.
3. Keep an eye on your network connection, as poor connectivity may cause other streaming issues

Scoreboard Timer Sync Error

If the Timer Sync Error occurs, ensure that your laptop's date, time, and time zone are set to automatic. The steps below provide a general guide, but may vary slightly depending on your operating system and version.

Windows:

1. Open Settings from the Start menu.
2. Select Time & Language → Date & Time.
3. Turn on Set time automatically and Set time zone automatically.
4. Windows will synchronise your laptop's date and time with internet time servers.
- 5.

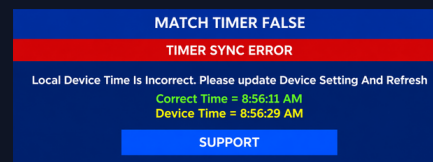

macOS:

1. Open the Apple menu and select System Settings.
2. Select General → Date & Time.
3. Ensure Set time and date automatically is enabled.
4. macOS will synchronise your laptop's date and time with an internet time server.



Event Days

Troubleshooting

Troubleshooting Sound

There is very little that can be done to resolve sound issues remotely. The on-site team is responsible for troubleshooting the sound setup.

Start by reviewing the sound box connections and settings (see *Mobile System Setup pg19*).

Static / Buzzing

1. Disconnect Mic 2 from Input 2 and check the sound on the stream.
2. If the buzzing persists, connect Mic 1 to Input 2 and check again.
3. If the issue remains, test Mic 2 in both inputs:
 - Mic 2 → Input 1
 - Mic 2 → Input 2
4. Check the stream after each change to identify whether the issue is with the mic connection or input.

No Sound

1. Confirm that 48V is switched ON.
2. Move the sound box to a different USB port on the VPU and check whether sound is detected.
3. Reboot the VPU and check whether the sound returns.
4. If there is still no sound, swap the mic extender cable with one of the camera extender cables to determine whether the extender is faulty.
5. If there is still no sound, you will most likely need a replacement sound box and/or Y-cable.

Last Resort

If the issue persists after completing the above troubleshooting steps:

1. Disconnect all connections from the sound box.
2. Wait 30 seconds.
3. Reconnect all connections and check the sound on the stream.

Important: If the issue is determined to be hardware-related, the VPU, sound box, and extender cables must be inspected to identify the fault and determine which components need to be repaired or replaced.

Event Days

Opening Tickets

For Tier 2 and Tier 3 technical queries, or when you have followed the relevant troubleshooting steps without resolving the issue, open a support ticket with AI Sport Africa.

Act While It's Live

Open the ticket immediately — don't wait.

Once the event ends, the cause of an issue can become extremely difficult to determine.

Opening the ticket while the issue is occurring gives the Support Team the best opportunity to investigate and identify the cause.

Send an email to support@aisport.africa. Sending your request directly to this inbox is the fastest way to access the **AI Sport Africa Technical Support Team**, who are best equipped to assist with technical issues.

Email Subject

The email subject becomes the ticket title and should include:

- Title of your request or issue
- System name (if applicable)
- Sport (if applicable)

Email Body

Include all relevant information relating to your request or issue. Where applicable, include:

- What the issue is
- Troubleshooting steps already completed
- When the issue occurred
- Any error messages or screenshots
- Any other information that may help the Support Team investigate

Email Tickets

- An email ticket remains open until it is manually closed by a member of the AI Sport Africa Support Team.
- Each new email thread creates a new ticket, regardless of how much time has passed since the previous email.



SUPPORT@AISPORT.AFRICA

Event Days

Event Day Checklist

At AI Sport Africa, we always recommend being as prepared as possible and controlling the controllables before event day. We understand the unpredictability of live events and the curveballs that can arise.

Feel free to use the event checklist below as a guiding reference to help with your event day preparations.

Event Checklist

Pre-Event Tasks		Target Completion
	Conduct a recce of the venue to determine the optimal setup location and identify the nearest power source . Where possible, complete a mock setup and frame check to ensure the best possible preparation for event day.	1 Week Before Event
	Review and test the stream graphics template , and submit any required change requests.	5 Days Before Event
	Coordinate all equipment logistics .	3 Days Before Event
	Gather all required equipment and perform a full system test , including a test event, to ensure all equipment is functioning correctly.	3 Days Before Event
	Arrange an operator to manage the event.	3 Days Before Event
	Review and verify all advertising allocations for the stream.	2 Days Before Event
	Notify the AI Sport Africa team of the upcoming event and ensure it has been booked on the AISA Platform.	48+ Hours Before Event Start
	Schedule all fixture events on the Pixellot CMS .	24+ Hours Before Event Start
	Ensure all team sheets have been uploaded and verified.	1 Day Before Event
Event Day Tasks		Target Completion
	Arrive at the venue and complete the system setup .	2.5+ Hours Before Event Start
	Open a calibration ticket .	1.5+ Hours Before Event Start
	Conduct a test event and verify audio functionality following calibration.	Post-Calibration
	Manage and monitor all live events.	Event Start
Post-Event Tasks		Target Completion
	Ensure the final event has been ended on the CMS.	End of Final Event
	Leave the system online for 10 minutes after the final event has concluded.	Immediately After Event
	Power down the system, pack away all equipment, and ensure any wet equipment is properly dried before storage.	10 Minutes Post-Event
	Test the system and equipment before the next scheduled event day.	Before Next Event Day



Event Days

Event Day Checklist

The target completion timeline on the previous page should be used as a guideline to assist with planning and preparation for your event.

However, to ensure sufficient time for support, configuration, and quality assurance, the following minimum notice periods must be adhered to when engaging with AI Sport Africa:

- **Stream Graphics Template Change Requests:** Must be submitted at least 5 days before the event.
- **Event Notification and AISA Platform Booking:** The AI Sport Africa team must be notified, and the event must be booked on the AISA Platform, at least 48 hours before the event start time.
- **Calibration Requests:** A calibration ticket must be logged at least 1.5 hours before the scheduled stream go-live time.

Failure to meet these minimum notice periods may impact our ability to guarantee that the requested changes, setup requirements, or calibration services can be completed before the event begins.

Should you require any assistance or guidance at any stage of the process, please do not hesitate to contact your AI Sport Africa representative. Our team is always available to support you and help ensure the successful delivery of your event.

