


Product Catalogue

2004

Information for Commercial Vehicle Products

- **Brake Systems (conventional and electronic)**
- **Air Suspension Systems**
- **Clutch Operating Systems**

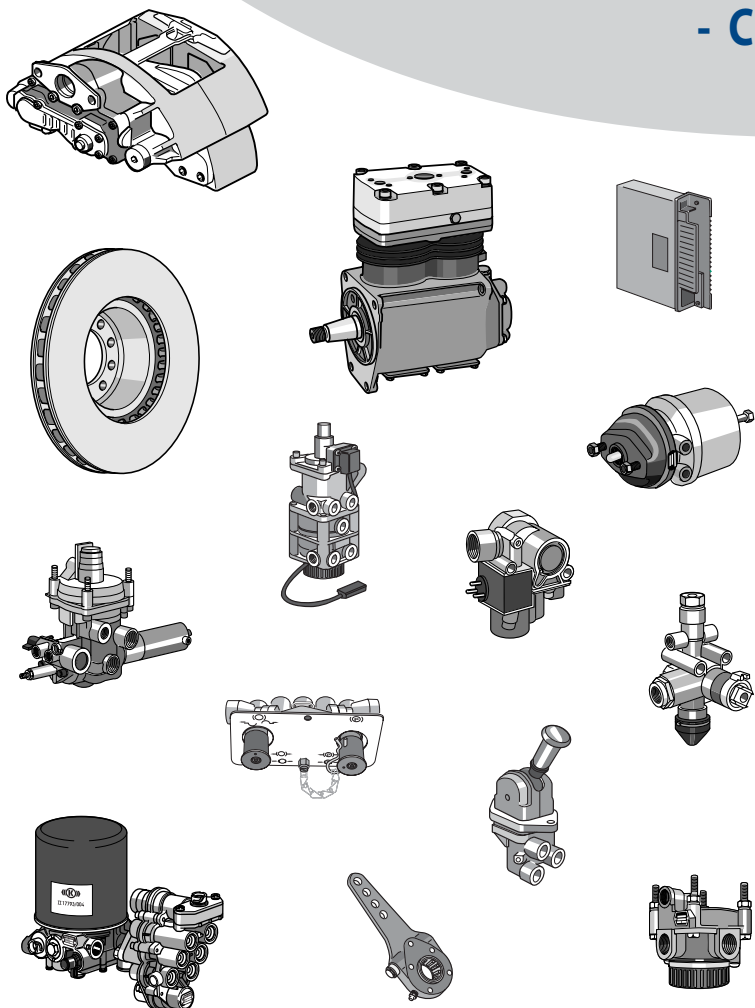

KNORR-BREMSE

Systems for Commercial Vehicles



Brake System Diagrams

- Antilock Braking System for Trucks 4S/4M
- Electronic Braking System for Trucks
- Antilock Braking System for Trailers 2S/2M
- Electronic Braking System for Trailers

Introduction 11


Indexes:

- Product Families, system order 12
- Product Families, alphabetical order 14
- Product Numbers in Part Number order 17
- Product Numbers in Type Number order 70

Product Families – technical information 93

Spares kits 283


Knorr-Bremse Antilock Braking System for Trucks - 4S/4M

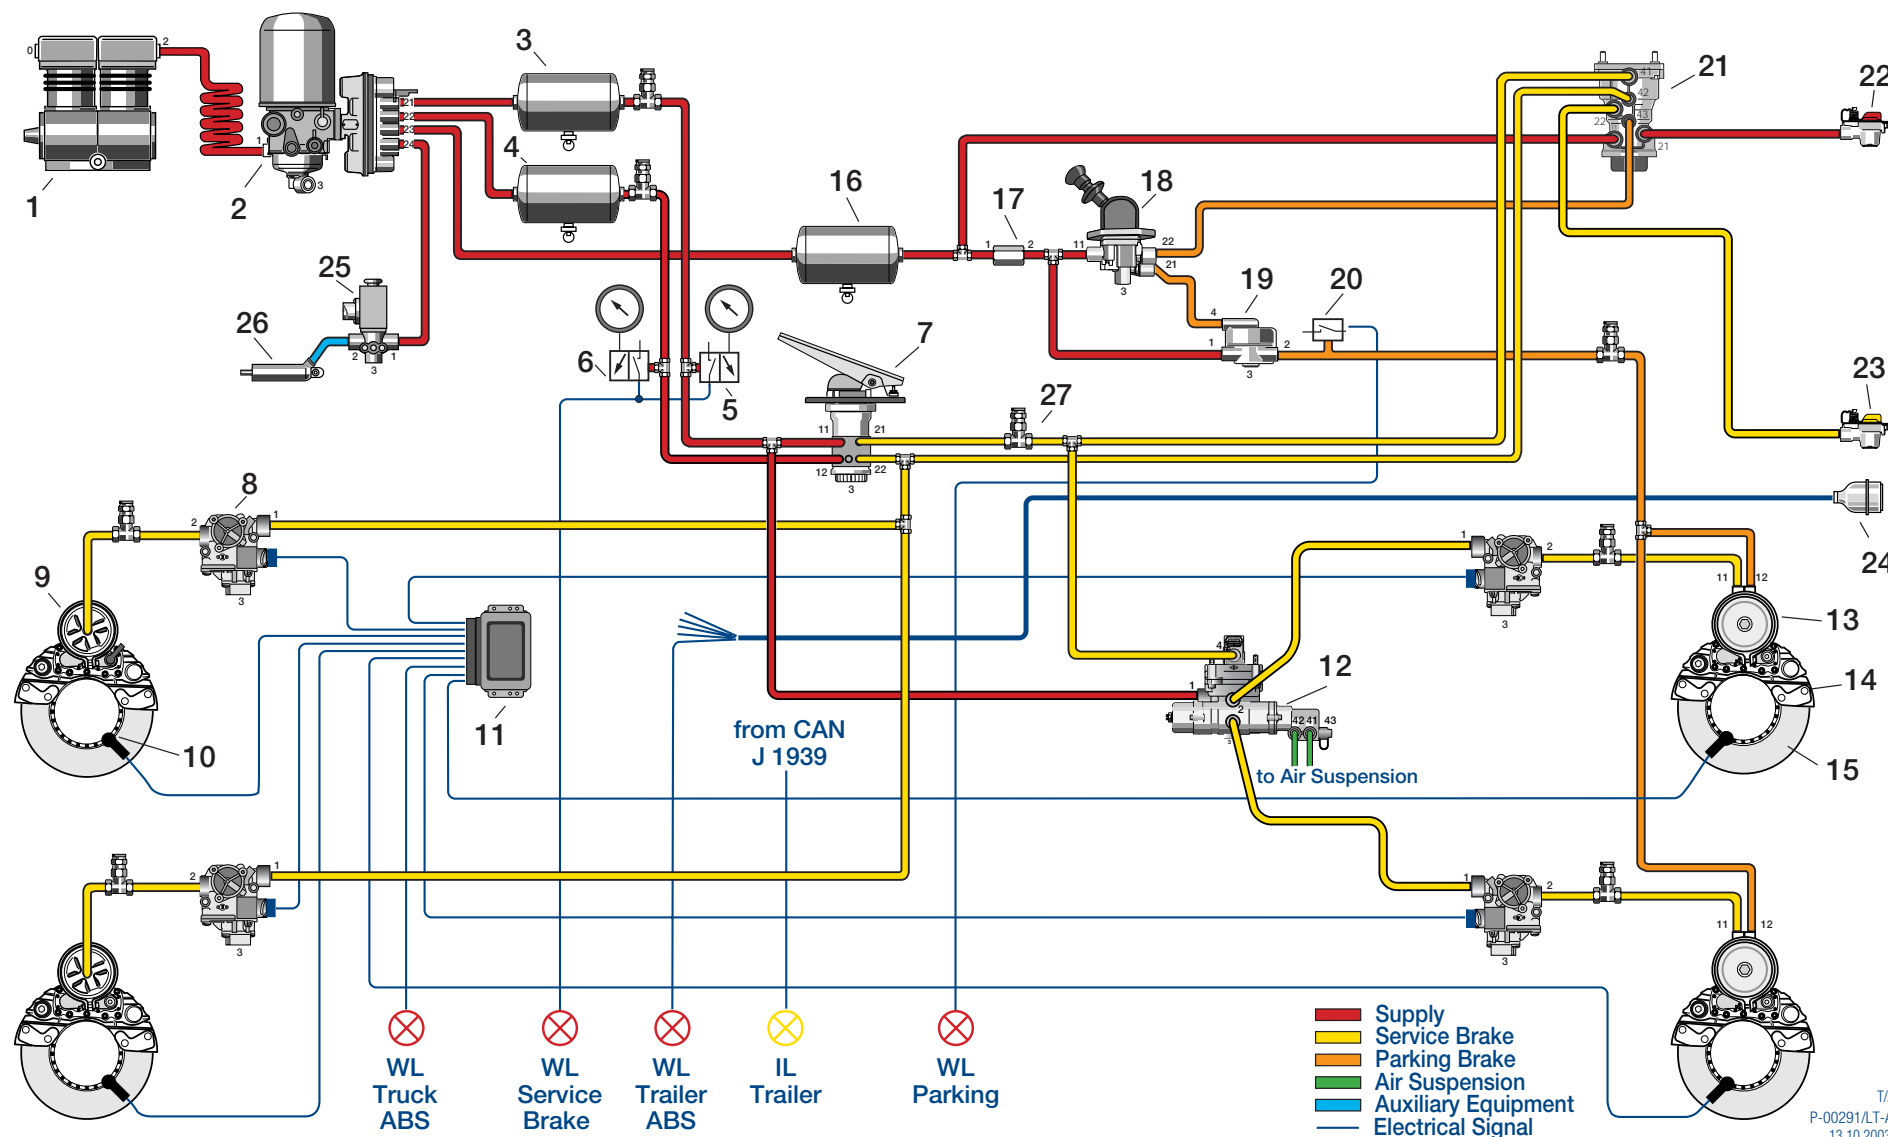

T/AS2
P-00291/LT-ABS
13.10.2003 EN

- | | | | | |
|-----------------------------|----------------------------------|----------------------------|----------------------------|-----------------------|
| 1 Compressor | 7 Foot Brake Valve | 13 Spring Brake | 19 Relay Valve | 25 Solenoid Valve |
| 2 Air Processing Unit | 8 ABS Modulator Valve | 14 Air Disc Brake | 20 Pressure Switch | 26 Operating Cylinder |
| 3 Air Reservoir Circuit 1 | 9 Brake Chamber | 15 Brake Disc | 21 Trailer Control Valve | 27 Test Connector |
| 4 Air Reservoir Circuit 2 | 10 Sensing Ring and Speed Sensor | 16 Air Reservoir Circuit 3 | 22 Coupling Head "Supply" | |
| 5 Pressure Switch Circuit 1 | 11 ABS-ECU | 17 Check Valve | 23 Coupling Head "Control" | |
| 6 Pressure Switch Circuit 2 | 12 Load Sensing Valve | 18 Hand Brake Valve | 24 ABS-Connection ISO 7638 | |
| | | | | WL Warning Lamp |
| | | | | IL Information Lamp |


Knorr-Bremse Electronic Braking System for Trucks

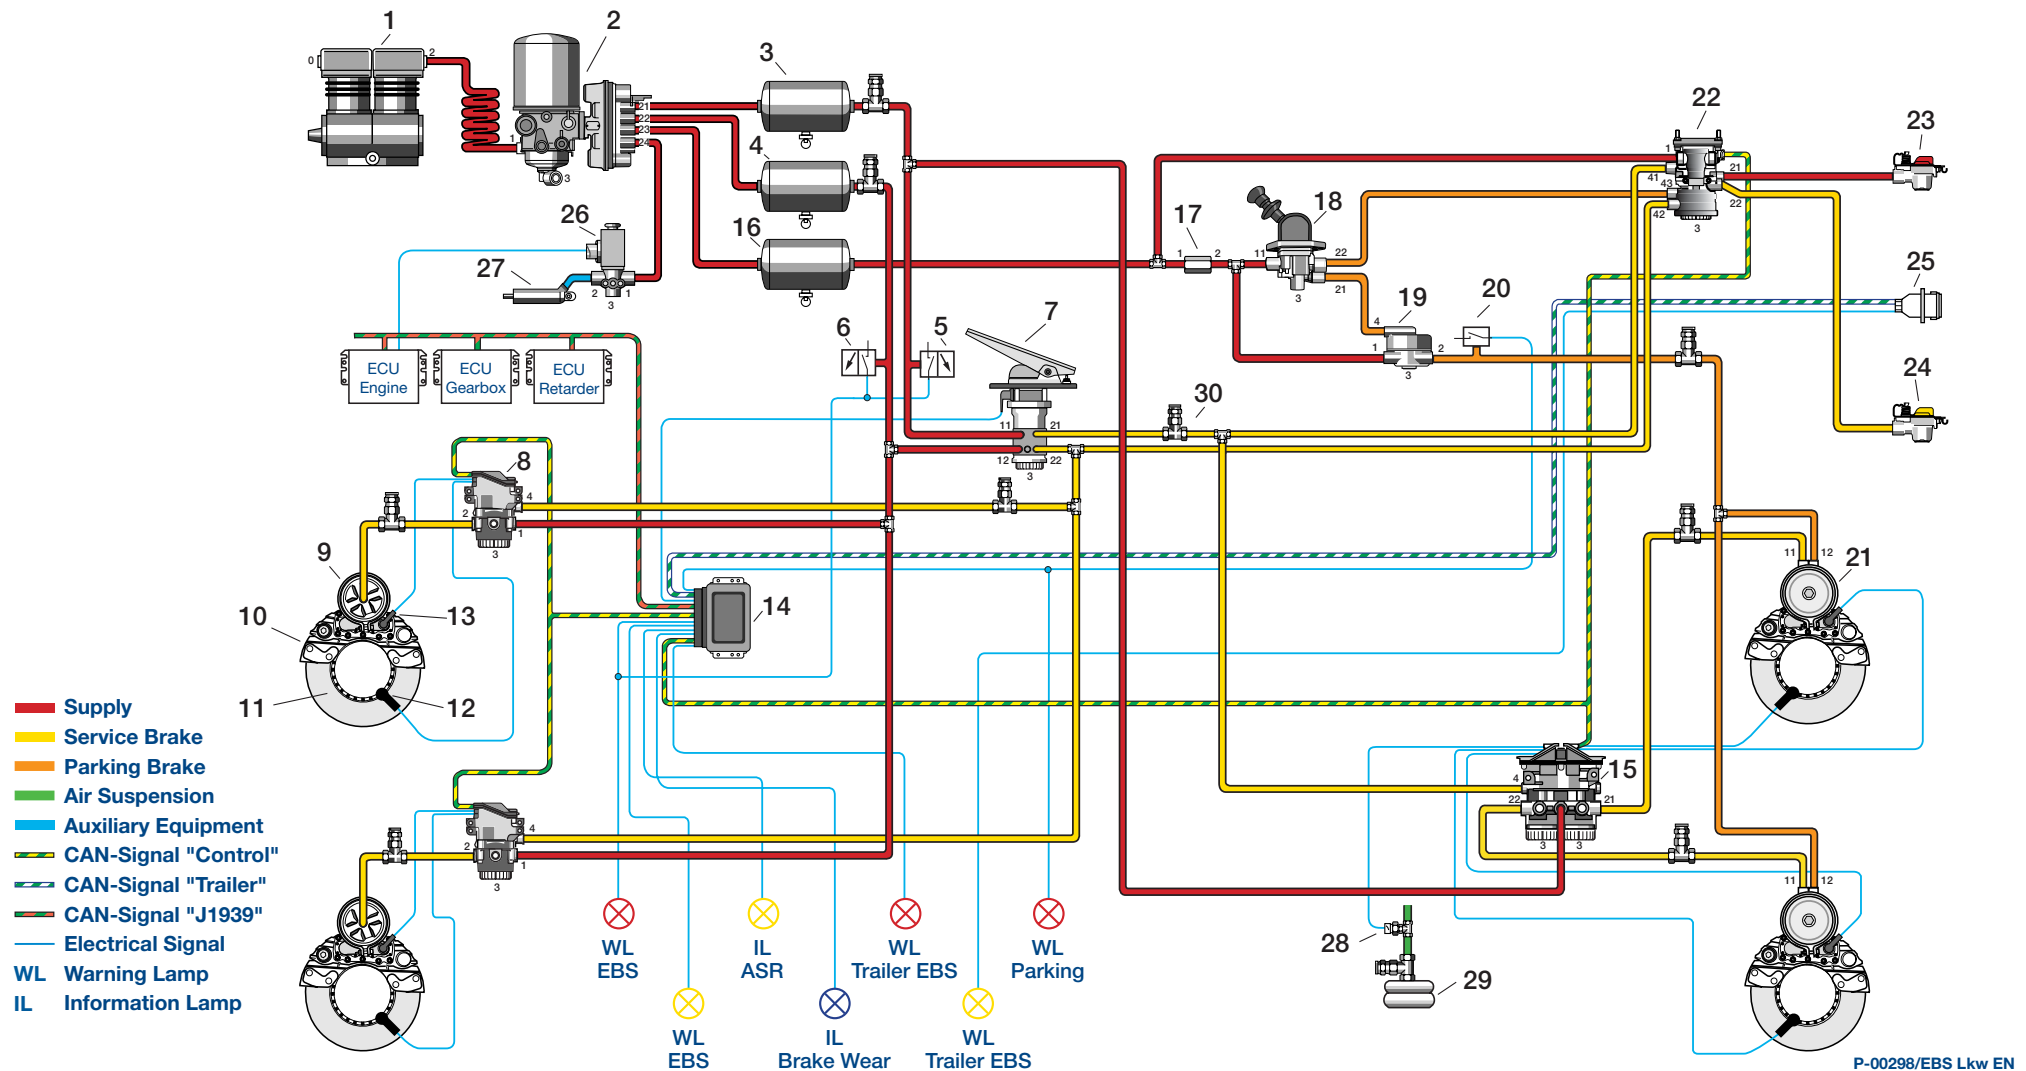

P-00298/EBS Lkw EN
T/AS 2 - 14.10.2003

- | | | | | | |
|-----------------------------|-----------------------------|----------------------------------|----------------------------|-------------------------------|-----------------------|
| 1 Compressor | 6 Pressure Switch Circuit 2 | 11 Brake Disc | 16 Air Reservoir Circuit 3 | 21 Spring Brake | 26 Solenoid Valve |
| 2 Air Processing Unit | 7 EBS Foot Brake Module | 12 Sensing Ring and Speed Sensor | 17 Check Valve | 22 EBS Trailer Control Module | 27 Operating Cylinder |
| 3 Air Reservoir Circuit 1 | 8 EBS 1-Channel Module | 13 Wear Sensor | 18 Hand Brake Valve | 23 Coupling Head "Supply" | 28 Pressure Sensor |
| 4 Air Reservoir Circuit 2 | 9 Brake Chamber | 14 EBS ECU | 19 Relay Valve | 24 Coupling Head "Control" | 29 Air Spring Bellows |
| 5 Pressure Switch Circuit 1 | 10 Air Disc Brake | 15 EBS 2-Channel Module | 20 Pressure Switch | 25 EBS Connection ISO 7638 | 30 Test Connector |

Knorr-Bremse Antilock Braking System for Trailers - 2S/2M

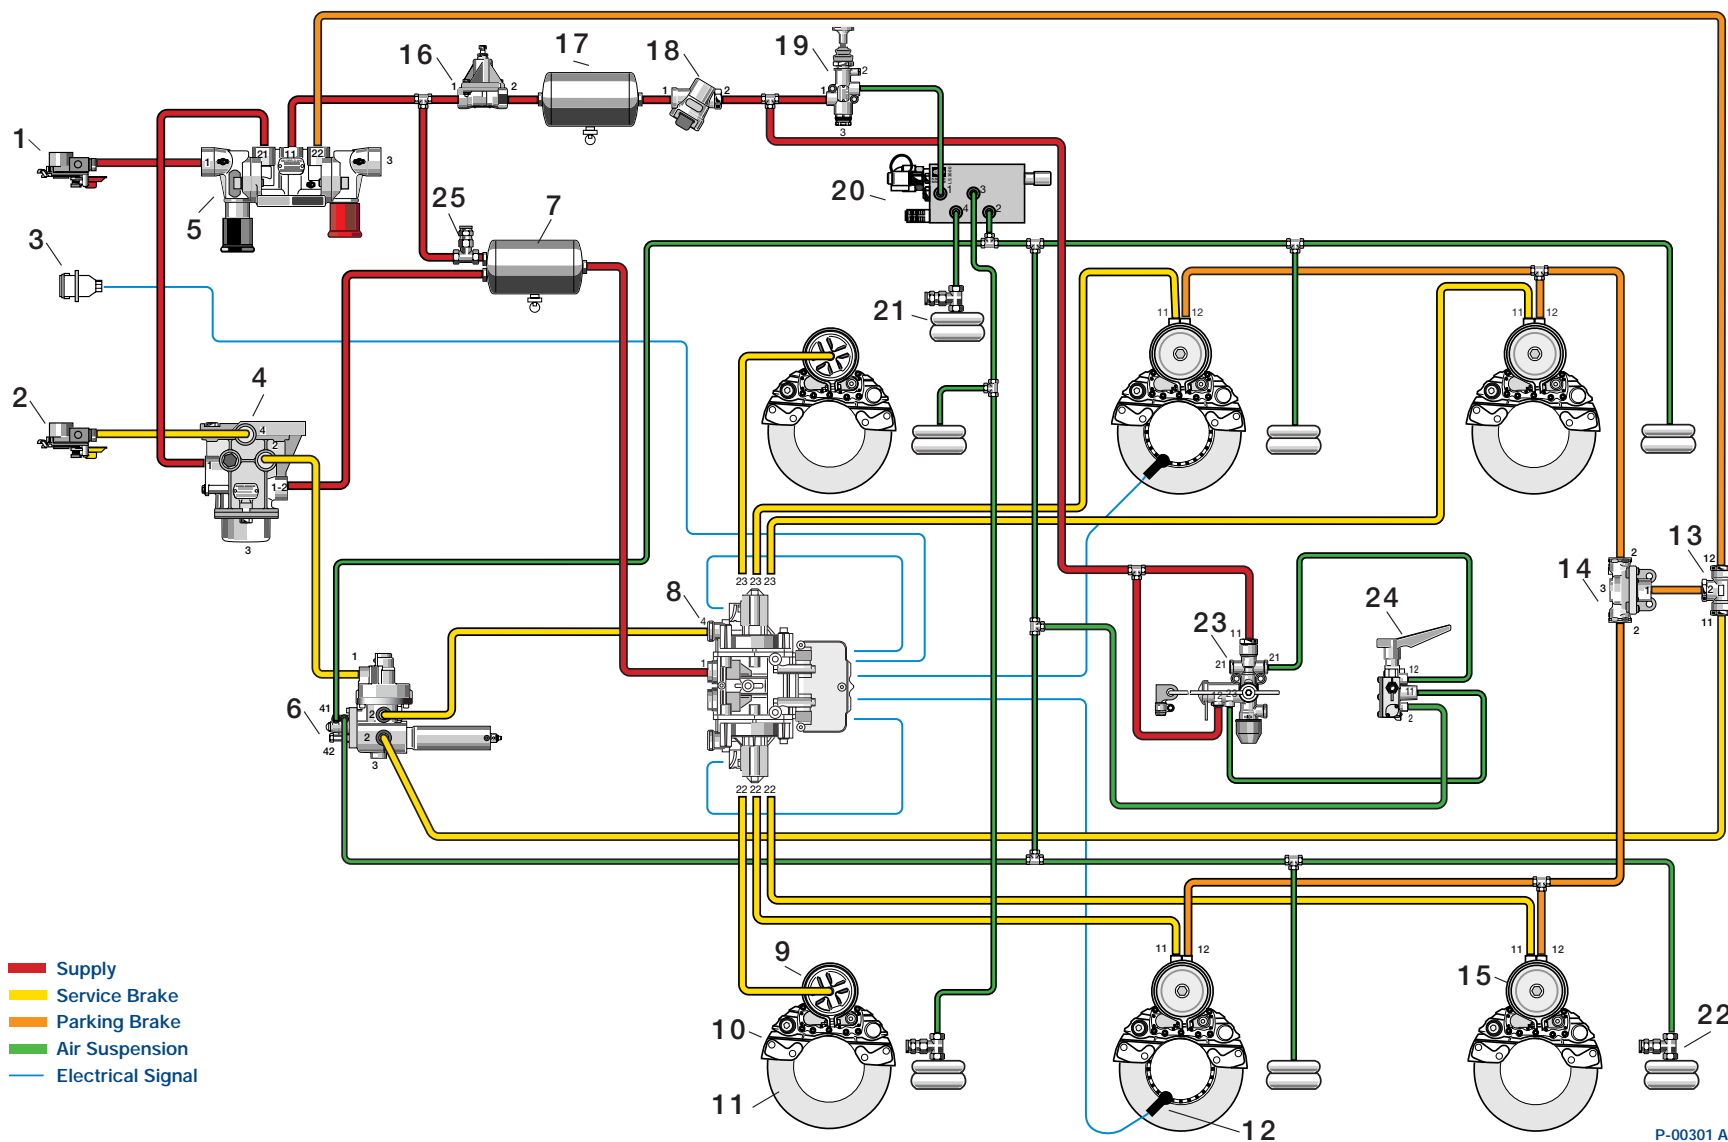

P-00301 ABS Anh1 EN

- 1 Coupling Head with Filter "Supply"
- 2 Coupling Head with Filter "Control"
- 3 ABS-Connection ISO 7638
- 4 Relay Emergency Valve
- 5 Combined Park / Shunt Valve


- 6 Load Sensing Valve
- 7 Air Reservoir
- 8 ABS Trailer Module
- 9 Brake Chamber
- 10 Air Disc Brake

- 11 Brake Disc
- 12 Sensing Ring and Speed Sensor
- 13 Double Check Valve
- 14 Quick Release Valve
- 15 Spring Brake

- 16 Charging Valve without feedback
- 17 Air Reservoir, Suspension
- 18 Line Filter
- 19 3/2 Control Valve
- 20 Lift Axle Valve - Pneumatically controlled

- 21 Lift Bellows
- 22 Air Spring Bellows
- 23 Levelling Valve
- 24 Raise/Lower Valve
- 25 Test Connector

Knorr-Bremse Electronic Braking System for Trailers

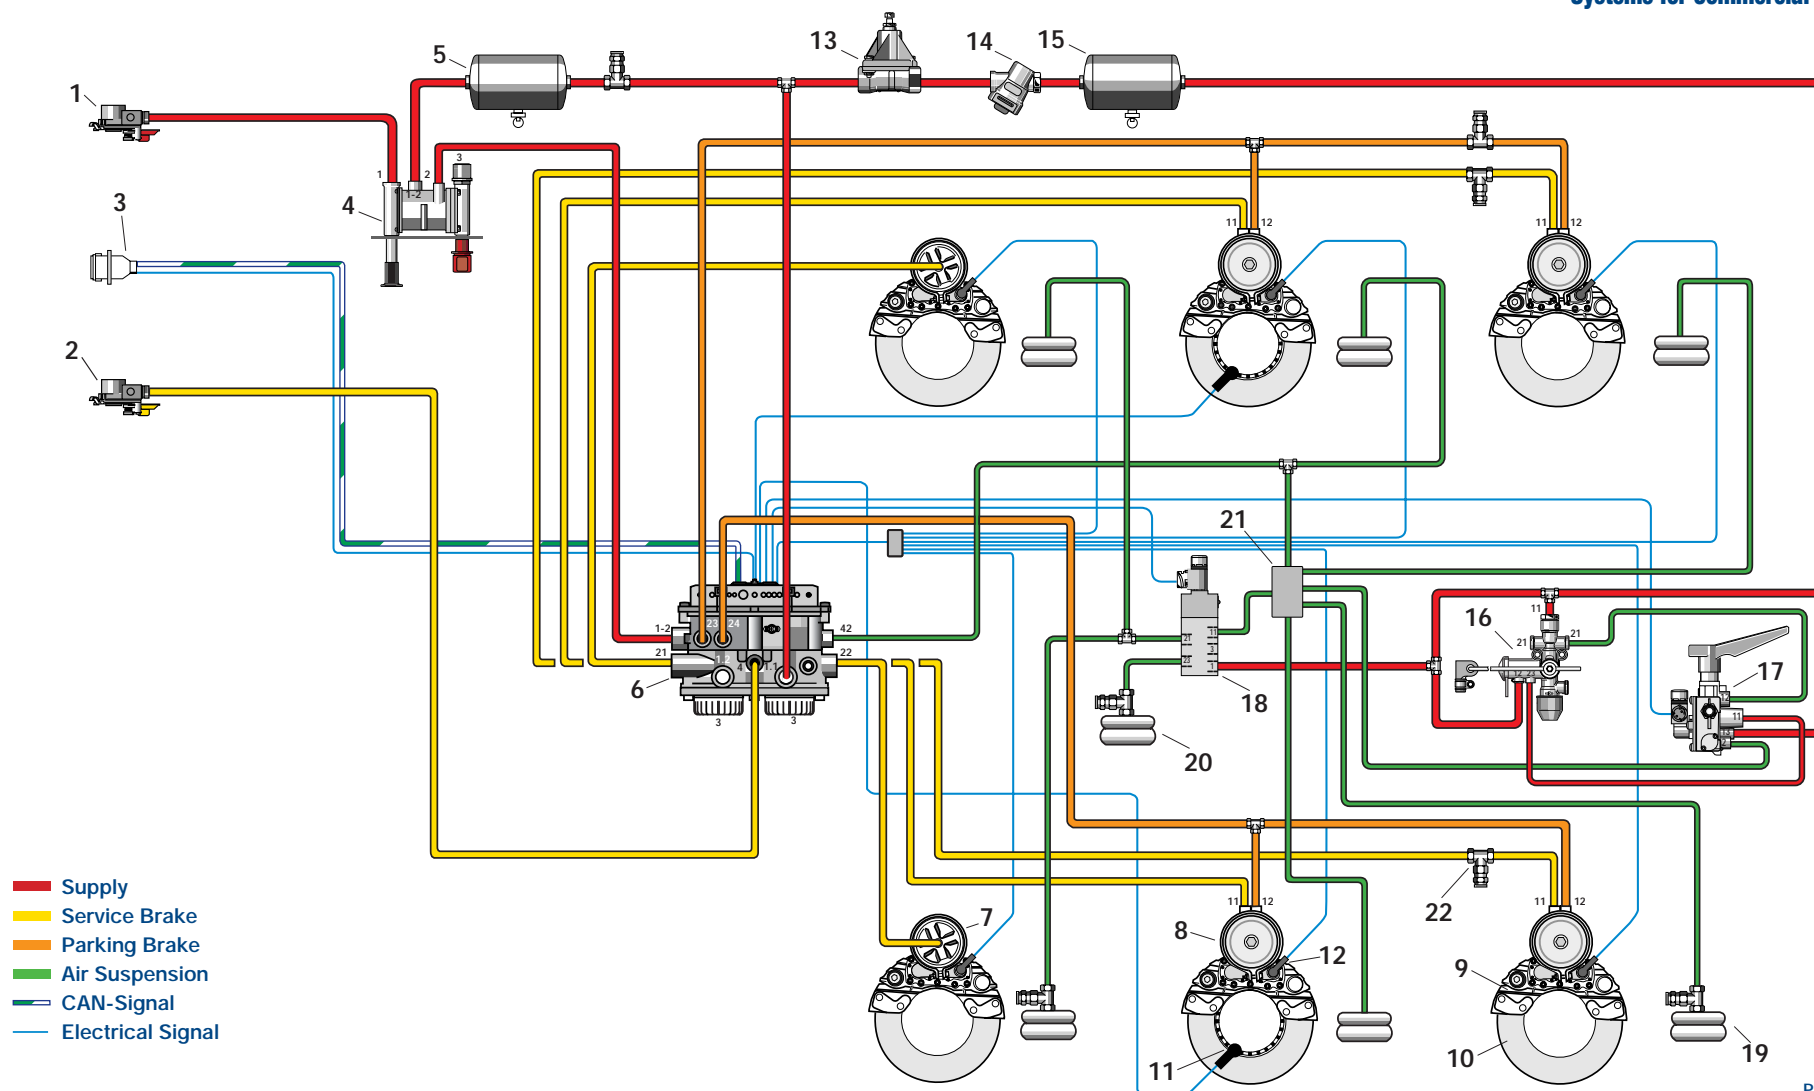

P-00302/EBS Anh EN

- 1 Coupling Head with Filter Supply
- 2 Coupling Head with Filter Control
- 3 EBS Connection ISO 7638
- 4 Park / Shunt Valve with Emergency Function
- 5 Air Reservoir

- 6 EBS Trailer Module
- 7 Brake Chamber
- 8 Spring Brake
- 9 Air Disc Brake
- 10 Brake Disc

- 11 Sensing Ring and Speed Sensor
- 12 Wear Sensor
- 13 Pressure Protection Valve
- 14 Line Filter
- 15 Air Reservoir, Suspension

- 16 Levelling Valve
- 17 Raise / Lower Valve
- 18 Lift Axle Valve
- 19 Air Spring Bellows
- 20 Lift Bellows

- 21 Junction Block
- 22 Test Connector

This catalogue is designed to provide an overview of the range of products for braking and suspension systems that are available from Knorr-Bremse for fitment to a wide range of commercial vehicles.

Products have been included in 'system' order by Product Family – i.e. from Compressor through to wheel end. In case of difficulty in locating a product, several indexes allow searching by Product, Part Number and Type Number. Within each section, products are listed in Type Number order where applicable, otherwise by Part Number.

The products listed represent those fitted to European commercial vehicles in recent years although some of the products are no longer available. If you are unable to find the Part Number you are looking for in the main Product Family section, the index will show if the part has been superseded. If you are still not able to find the Part Number, you should go to:

www.Knorr-BremseSfN.com or call your local Knorr-Bremse representative.

In general, all Part Numbers listed in the Product Family tables should be available from your local Knorr-Bremse Distributor. However, if you are searching for a product for a new OE application, please note that we have identified certain Part Numbers with a bullet point symbol '•' in the left hand margin to represent the 'preferred' products. Should you wish to specify a Part Number that is not identified in this way, again please contact Knorr-Bremse for advice.

Whilst every effort has been made to ensure the accuracy of the data in this catalogue, we reserve the right to amend or change this information without notice. Should you find any errors or omissions, or have any comment regarding catalogue layout, please send an email with the details to:

webmaster.truck@Knorr-Bremse.com or call your local Knorr-Bremse representative.

PLEASE NOTE

This catalogue is intended for the exclusive use of trained persons within the commercial vehicle industry and must not be passed on to any third party.

This catalogue has been prepared to assist customers to make their own decision on the products needed and does not purport to be all-inclusive or to contain all information necessary for this decision. No responsibility is assumed as a result of this decision or as a result of incorrect or inappropriate parts being fitted to a vehicle. We cannot accept any liability nor offer any guarantee regarding data accuracy, completeness or timeliness. The information in this catalogue does not represent any guarantees or ensured characteristics in terms of the German civil code.

No liability can be accepted based on the information, its use, recommendations or advice provided within this catalogue. In no event may we be held liable for any damage or loss except in the case of wilful intent or gross negligence on our part, or if any mandatory legal provisions apply.

Brand names mentioned in this catalogue are not identified as such in all cases. We would emphasise however, that they are nevertheless subject to the provisions of trademark legislation.

Texts and graphics created by us are subject to our regulations on utilisation and exploitation and may only be copied or reproduced with our express permission.

Any legal disputes arising from the use of this catalogue or the information contained within shall be subject to German law. Failure of any individual clause of this disclaimer to comply with current legal provisions does not affect the validity of the remaining clauses.

This disclaimer is an English translation of a German text, which should be referred to for all legal purposes.

Section	Product Families	Page
1	Compressors	93
2	Air Dryers	102
3	Air Processing Units	107
4	Alcohol Injectors / Evaporators	108
5	Filters	110
6	Drain Valves, Water Separators, Condensers	111
7	Governor Valves	113
8	Unloader Valves	114
9	Multi Circuit Protection Valves	117
10	Pressure Protection Valves	121
11	Pressure Limiting Valves	124
12	Foot Brake Valves	128
13	Hand Control Valves	134
14	Load Sensing Valves	140
15	Relay Valves	146
16	Quick Release Valves	149
17	Pressure Retaining Valves	151
18	Pressure Proportioning Valves	152
19	Adapter Valves	154
20	Trailer Control Valves	155
21	Supply Dump Valves	158
22	Coupling Heads	159
23	Relay Emergency Valves	162
24	Single Check Valves	163
25	Double Check Valves	164
26	Differential Protection Valves	165
27	Non-Return Valves	166
28	Throttle Valves	167
29	Control Valves	168
30	Park / Shunt Valves	172
31	ABS Components	173
32	ABS System-Configurations	188
33	EBS Components	195
34	Brake Chambers	196
35	Spring Brakes	211
36	Spring Brakes (Remote)	226
37	Stroke Warning Switches	228
38	Slack Adjusters	229
39	Air Disc Brakes	241
40	Solenoid Valves	247
41	Silencers	249
42	Switches	251
43	Safety Valves	253
44	Test Connectors	254
45	Tyre Inflator Valves	255

Section	Product Families	Page
46	Levelling Valves	256
47	Raise / Lower Valves	262
48	Height Limiting Valves	264
49	Adjusting Elements (Datum Level)	265
50	Electronic Level Control Systems	266
51	Lift Axle Valves	268
52	Residual Pressure Valves	269
53	Brake Servo Units	270
54	Clutch Servos	271
55	Clutch Actuators	275
56	Master Cylinders	276
57	Slave Cylinders	277
58	Gear Change Servo Valves	278
59	Operating Cylinders	279

Section	Product Families	Page
31	ABS Components	173
32	ABS System-Configurations	188
19	Adapter Valves	154
49	Adjusting Elements (Datum Level)	265
39	Air Disc Brakes	241
2	Air Dryers	102
3	Air Processing Units	107
4	Alcohol Injectors / Evaporators	108
34	Brake Chambers	196
53	Brake Servo Units	270
55	Clutch Actuators	275
54	Clutch Servos	271
1	Compressors	93
29	Control Valves	168
22	Coupling Heads	159
26	Differential Protection Valves	165
25	Double Check Valves	164
6	Drain Valves, Water Separators, Condensers	111
33	EBS Components	195
50	Electronic Level Control Systems	266
5	Filters	110
12	Foot Brake Valves	128
58	Gear Change Servo Valves	278
7	Governor Valves	113
13	Hand Control Valves	134
48	Height Limiting Valves	264
46	Levelling Valves	256
51	Lift Axle Valves	268
14	Load Sensing Valves	140
56	Master Cylinders	276
9	Multi Circuit Protection Valves	117
27	Non-Return Valves	166
59	Operating Cylinders	279
30	Park / Shunt Valves	172
11	Pressure Limiting Valves	124
18	Pressure Proportioning Valves	152
10	Pressure Protection Valves	121
17	Pressure Retaining Valves	151
16	Quick Release Valves	149
47	Raise / Lower Valves	262
23	Relay Emergency Valves	162
15	Relay Valves	146
52	Residual Pressure Valves	269
43	Safety Valves	253

Section	Product Families	Page
41	Silencers	249
24	Single Check Valves	163
38	Slack Adjusters	229
57	Slave Cylinders	277
40	Solenoid Valves	247
35	Spring Brakes	211
36	Spring Brakes (Remote)	226
37	Stroke Warning Switches	228
21	Supply Dump Valves	158
42	Switches	251
44	Test Connectors	254
28	Throttle Valves	167
20	Trailer Control Valves	155
45	Tyre Inflator Valves	255
8	Unloader Valves	114

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
0265004011000	-		178	0481003007000	-		135
0265004012000	-		178	0481006012000	-		121
0265004015000	-		178	0481007002000	-	0481007023000	169
0265004016000	-		178	0481007004000	-		169
0265050102000	-		178	0481007005000	-	0481007031000	169
0265050103000	-		178	0481007008000	-		169
0265050104000	-	0265050148000	179,188	0481007009000	-	0481007029000	169
0265050108000	-	0265050147000	179	0481007010000	-	0481007030000	169
0265050109000	-		178	0481007011000	-	0481007023000	169
0265050112000	-		178	0481007012000	-		169
0265050114000	-		178	0481007015000	-		169
0265050116000	-		178	0481007016000	-		169
0265050117000	-		178	0481007017000	-	0481007049000	169
0265050118000	-		178	0481007018000	-	AE1111 (I66920)	170
0265050119000	-		179	0481007020000	-	0481007031000	169
0265050123000	-		179	0481007021000	-	0481007049000	169
0265050128000	-	0265050151000	179	0481007022000	-		169
0265050129000	-		179	0481007023000	-		169
0265050130000	-	0486000129000	180	0481007027000	-		169
0265050131000	-	0486000128000	180	0481007028000	-		169
0265050132000	-		179	0481007029000	-		169
0265050134000	-	0486000070000	179	0481007030000	-		169
0265050140000	-		179	0481007031000	-		169
0265050141000	-		179	0481007035000	-		169
0265050142000	-		179	0481007036000	-		169
0265050147000	-		179	0481007037000	-		169
0265050148000	-		179,188	0481007039000	-		169
0265050149000	-		179	0481007040000	-		169
0265050150000	-		179	0481007043000	-		169
0265050151000	-		179	0481007046000	-		169
0265050152000	-		179	0481007047000	-		169
0265150305000	-	0265150315000	173	0481007049000	-		169
0265150315000	-		173	0481007052000	-		169
0265150318000	-	0265150328000	173	0481007056000	-		169
0265150323000	-		173	0481007057000	-		169
0265150324000	-		173	0481007059000	-		169
0265150328000	-		173	0481007060000	-		169
0265150333000	-		173	0481007061000	-		169
0265150351000	-		173	0481007062000	-		169
0265151201000	-		173	0481007066000	-		169
0265151202000	-		173	0481007501000	-		169
0265151204000	-	0265151205000	173	0481007503000	-		169
0265151205000	-		173	0481007504000	-		169
0265151206000	-		173	0481008015000	-	MB1201 (I72776)	132
0265151207000	-		173	0481008038000	-	MB4428 (I55724)	132
0265151209000	-		173	0481008047000	-	MB4434 (II32091)	132
0265151301000	-	0265151302000	173	0481008104000	-		129
0265151302000	-		173	0481008106000	-		129
0265151304000	-		173	0481009014000	-		124
0265152001000	-	0265152004000	177	0481009015000	-		124
0265152004000	-		177	0481009016000	-		124
0265152005000	-		177	0481009017000	-		124
0265351101000	-		175	0481009018000	-		124
0265351102000	-		175	0481009019000	-		124
0265351104000	-		175	0481009020000	-		124
0265351108000	-		175	0481009021000	-		124
0265351109000	-		175	0481009022000	-		124
0265351110000	-		175	0481009023000	-		124
0265351114000	-		175	0481009025000	-		124
0265351118000	-		175	0481009026000	-		124
0265351122000	-		175	0481009027000	-		124
0265351201000	-		175	0481009029000	-		124
0457101001000	-		110	0481009030000	-		124
0457102002000	-	LA2100 (I13886)	110	0481009032000	-		124
0480099002000	-	ZB4187 (I60312)	101	0481009034000	-		124
0480099004000	-	ZB4275 (I88057)	101	0481009036000	-		124

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.
0481009037000	-		124
0481009039000	-		124
0481009040000	-		124
0481009042000	-		124
0481009043000	-		125
0481009045000	-		125
0481009047000	-		125
0481009050000	-		125
0481009051000	-		125
0481009052000	-		125
0481009055000	-		125
0481009059000	-		125
0481009061000	-		125
0481009062000	-		125
0481009063000	-		125
0481009064000	-		125
0481009065000	-		125
0481009067000	-		125
0481009069000	-		125
0481009071000	-		125
0481009101000	-		125
0481009102000	-		125
0481014003000	-	AE5115 (I75598)	163
0481015002000	-		167
0481015003000	-		167
0481016016000	-		135
0481016019000	-		135
0481016023000	-		135
0481016024000	-	HB1154 (I76112)	138
0481016101000	-	0481016106000	135
0481016104000	-	0481016108000	135
0481016105000	-	HB1170 (I92182)	138
0481016106000	-		135
0481016107000	-		135
0481016108000	-		135
0481016109000	-	HB1170 (I92182)	138
0481016112000	-		135
0481016113000	-		135
0481016114000	-		135
0481016115000	-		135
0481016117000	-		135
0481016201000	-		135
0481016202000	-		135
0481016203000	-		135
0481016204000	-		135
0481016206000	-		135
0481016207000	-		135
0481016209000	-		136
0481016301000	-		136
0481016302000	-		136
0481016303000	-		136
0481016304000	-	HB1168 (I92181)	138
0481016305000	-	HB1181 (I92188)	138
0481016308000	-		136
0481016309000	-		136
0481016312000	-		136
0481016401000	-		136
0481016402000	-		136
0481016601000	-		136
0481016603000	-		136
0481016702000	-		136
0481016703000	-		136
0481019002000	-		111
0481019003000	-		111
0481019004000	-		111
0481019005000	-		111

Part No.	Type No.	Replacement	Page No.
0481019007000	-		111
0481019008000	-		111
0481019101000	-		112
0481026004000	-	0481026006000	146
0481026005000	-	RE1115 (I76204)	148
0481026006000	-		146
0481026008000	-		146
0481026009000	-	0481026021000	146
0481026010000	-	0481026021000	146
0481026012000	-		146
0481026013000	-		146
0481026014000	-	0481026022000	146
0481026015000	-	0481026021000	146
0481026016000	-	0481026021000	146
0481026019000	-	0481026021000	146
0481026021000	-		146
0481026022000	-		146
0481026023000	-		146
0481026026000	-		146
0481026027000	-	0481026033000	146
0481026032000	-	0481026021000	146
0481026033000	-		146
0481026301000	-		146
0481026302000	-		146
0481026303000	-		146
0481026304000	-		146
0481026305000	-		146
0481026306000	-		147
0481026307000	-		147
0481027101000	-		117
0481027102000	-		117
0481027103000	-	0481027104000	117
0481027104000	-		117
0481036000000	-		141
0481036101000	-	BR4442 (II14892)	142
0481036102000	-	BR4411 (I78307)	141
0481036105000	-	BR4412 (I81595)	141
0481036108000	-		141
0481036115000	-	BR4423 (I90908)	142
0481036116000	-	BR4439 (II14591)	142
0481036117000	-	BR4421 (I85281)	142
0481036121000	-	BR4442 (II14892)	142
0481036122000	-	BR4444 (II14894)	142
0481036123000	-	BR4439 (II14591)	142
0481036124000	-	BR4454 (II18069)	142
0481036205000	-	0481036206000	141
0481036206000	-		141
0481036207000	-		141
0481039011000	-		114
0481039013000	-		114
0481039102000	-	0481039222000	115
0481039105000	-	0481039225000	115
0481039108000	-	0481039208000	114
0481039110000	-	0481039210000	114
0481039111000	-	0481039211000	114
0481039114000	-	0481039214000	114
0481039116000	-	0481039216000	114
0481039118000	-	0481039218000	114
0481039119000	-	0481039219000	114
0481039120000	-	0481039220000	114
0481039201000	-		114
0481039202000	-		114
0481039203000	-		114
0481039204000	-		114
0481039205000	-		114
0481039206000	-		114

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.
0481039208000	-		114
0481039209000	-		114
0481039210000	-		114
0481039211000	-		114
0481039213000	-		114
0481039214000	-		114
0481039215000	-		114
0481039216000	-		114
0481039218000	-		114
0481039219000	-		114
0481039220000	-		114
0481039221000	-		115
0481039222000	-		115
0481039224000	-		115
0481039225000	-		115
0481039227000	-	0481039209000	114
0481039228000	-		115
0481039234000	-		115
0481039235000	-		115
0481039240000	-		115
0481039241000	-		115
0481039252000	-		115
0481039253000	-		115
0481039257000	-		115
0481039258000	-		115
0481039259000	-		115
0481039268000	-		115
0481042101000	-	0481042201000	115
0481042106000	-	0481042212000	115
0481042201000	-		115
0481042202000	-		115
0481042205000	-		115
0481042207000	-		115
0481042208000	-		115
0481042209000	-		115
0481042210000	-		115
0481042211000	-		115
0481042212000	-		115
0481042214000	-		115
0481042221000	-		115
0481042223000	-		115
0481042225000	-		115
0481057002000	-		147
0481058003000	-		164
0481060003000	-		166
0481061003000	-		155
0481061004000	-		155
0481061005000	-		155
0481061007000	-		155
0481061009000	-	0481061213000	155
0481061010000	-	0481061214000	155
0481061012000	-	0481061005000	155
0481061013000	-		155
0481061015000	-	0481061021000	155
0481061018000	-	0481061228000	155
0481061020000	-		155
0481061021000	-		155
0481061022000	-		155
0481061023000	-		155
0481061025000	-		155
0481061205000	-	0481061225000	155
0481061206000	-	0481061226000	155
0481061209000	-	0481061233000	156
0481061210000	-	0481061234000	156
0481061211000	-		155
0481061212000	-		155

Part No.	Type No.	Replacement	Page No.
0481061213000	-		155
0481061214000	-		155
0481061215000	-		155
0481061219000	-		155
0481061220000	-		155
0481061225000	-		155
0481061226000	-		155
0481061228000	-		155
0481061230000	-		156
0481061231000	-		156
0481061232000	-		156
0481061233000	-		156
0481061234000	-		156
0481061245000	-		156
0481061248000	-		156
0481062004000	-	0481062104000	117
0481062005000	-	0481062308000	117
0481062006000	-	0481062303000	117
0481062007000	-	0481062307000	117
0481062008000	-	0481062308000	117
0481062010000	-	0481062310000	118
0481062011000	-	0481062104000	117
0481062012000	-	0481062301000	117
0481062101000	-	0481062301000	117
0481062103000	-	0481062303000	117
0481062104000	-		117
0481062105000	-	0481062308000	117
0481062106000	-	0481062303000	117
0481062107000	-	0481062307000	117
0481062108000	-	0481062308000	117
0481062109000	-	0481062309000	117
0481062110000	-	0481062310000	118
0481062112000	-		117
0481062114000	-		117
0481062116000	-		117
0481062201000	-	0481062401000	118
0481062202000	-	0481062408000	118
0481062203000	-	0481062401000	118
0481062207000	-	0481062407000	118
0481062208000	-	0481062408000	118
0481062209000	-	0481062413000	118
0481062301000	-		117
0481062303000	-		117
0481062306000	-	0481062303000	117
0481062307000	-		117
0481062308000	-		117
0481062309000	-		117
0481062310000	-		118
0481062312000	-		118
0481062317000	-		118
0481062401000	-		118
0481062403000	-	0481062401000	118
0481062405000	-		118
0481062407000	-		118
0481062408000	-		118
0481062412000	-		118
0481062413000	-		118
0481063002000	-		121
0481063004000	-		121
0481063005000	-		121
0481063006000	-		121
0481063009000	-		121
0481063010000	-		121
0481063013000	-		121
0481063021000	-		121
0481063031000	-		121

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
0481063033000	-	0481063037000	121	0481067009000	-		152
0481063035000	-	0481063043000	121	0481097003000	-		141
0481063036000	-	0481063031000	121	0481097006000	-		141
0481063037000	-		121	0481097007000	-		141
0481063039000	-	0481063037000	121	0481097008000	-		141
0481063040000	-	0481063037000	121	0481099001000	-		141
0481063041000	-	0481063031000	121	0481099009000	-		141
0481063042000	-	0481063043000	121	0481099011000	-		141
0481063043000	-		121	0481500007000	-		247
0481064001000	-	0481064007000	129	0481500101000	-		247
0481064002000	-		129	0481500102000	-		247
0481064003000	-		129	0481500103000	-		247
0481064004000	-		129	0481500104000	-		247
0481064005000	-		129	0481500105000	-		247
0481064006000	-		129	0481503011000	-		247
0481064007000	-		129	0481503018000	-		247
0481064011000	-		129	0481503019000	-		247
0481064012000	-		129	0481503023000	-		247
0481064013000	-		129	0481510004000	-		247
0481064014000	-	0481064016000	129	0481511001000	-		247
0481064016000	-		129	0481511002000	-		248
0481064017000	-		129	0481511003000	-	0486206101000	248
0481064101000	-	MB4631 (I76410)	132	0481511004000	-		248
0481064102000	-		129	0481511101000	-		248
0481064103000	-		129	0481511102000	-		248
0481064105000	-	0481064115000	129	0481511105000	-		248
0481064106000	-		129	0481511106000	-		248
0481064107000	-	0481064108000	129	0482005003000	-		280
0481064108000	-		129	0482005005000	-		280
0481064110000	-		129	0482005006000	-		280
0481064113000	-		129	0482005008000	-		280
0481064115000	-		129	0482005013000	-		280
0481064117000	-		129	0482005015000	-		280
0481064118000	-		129	0482005017000	-		280
0481064121000	-		129	0482005018000	-		280
0481064122000	-		129	0482006006000	-		280
0481064201000	-		130	0482006007000	-		280
0481064202000	-		130	0482006008000	-		280
0481064205000	-		130	0482006009000	-		280
0481064206000	-		130	0482006011000	-	0482018002000	280
0481064209000	-		130	0482006013000	-	0482006014000	280
0481064210000	-		130	0482006014000	-		280
0481064211000	-		130	0482011001000	-	BZ1600 (I35810)	201
0481064212000	-	MB4657 (I89387)	132	0482016003000	-		280
0481064214000	-	MB4661 (I93189)	132	0482018002000	-		280
0481064217000	-	MB4804 (II16538)	133	0482019012000	-	BZ4320 (I68201)	209
0481064218000	-	MB4803 (II16537)	133	0482020002000	-		280
0481064301000	-		130	0482020003000	-		280
0481064303000	-		130	0482020006000	-		280
0481064401000	-		130	0482020007000	-		280
0481064405000	-		130	0482020008000	-		280
0481064601000	-		130	0482020009000	-		280
0481064602000	-		130	0482020010000	-		280
0481064603000	-		130	0482022001000	-	BZ3332 (I78491)	198
0481064701000	-		130	0482022201000	-	BZ3464 (I77743)	198
0481064702000	-		130	0482022204000	-	BZ3442 (I75268)	198
0481064703000	-		130	0482022205000	-	BZ3443 (I75269)	198
0481065000000	-		141	0482022206000	-	BZ3441 (I75267)	198
0481065002000	-		141	0482022207000	-	BZ3440 (I75266)	198
0481065003000	-	0481065004000	141	0482022211000	-	BZ3481 (I88250)	199
0481065004000	-		141	0482022401000	-	BZ3555 (I77744)	199
0481065101000	-		144	0482022411000	-	BZ3573 (I88252)	199
0481065102000	-		144	0482023403000	-	0482023408000	204
0481065103000	-		144	0482023407000	-	0482023408000	204
0481067007000	-		152	0482023408000	-		204
0481067008000	-		152	0482023501000	-	0482023504000	204

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
0482023504000	-		204	0482513004000	-	BY9001 (II18888)	220
0482023505000	-	0482023504000	204	0482513202000	-	BY9001 (II18888)	220
0482023601000	-	0482023610000	204	0482513203000	-	BY9001 (II18888)	220
0482023602000	-	0482023613000	204	0482513205000	-		220
0482023604000	-	0482023610000	204	0482513206000	-	BY7114 (I88636)	220
0482023607000	-	0482023610000	204	0482513401000	-	BY9201 (II16576000)	220
0482023610000	-		204	0482513402000	-	BY9201 (II16576000)	220
0482023613000	-		204	0482513406000	-	BY9201 (II16576000)	220
0482023701000	-	0482023708000	204	0482513407000	-	BY7203 (I86323)	220
0482023704000	-	0482023708000	204	0482513551000	-		220
0482023708000	-		204	0482513552000	-		220
0482023801000	-	0482023806000	204	0482513556000	-		220
0482023802000	-	0482023809000	204	0482513557000	-		220
0482023804000	-	0482023810000	204	0482513601000	-	0482513606000	220
0482023806000	-		204	0482513602000	-	0482513607000	220
0482023809000	-		204	0482513604000	-		220
0482023810000	-		204	0482513605000	-	0482513604000	220
0482023904000	-		204	0482513606000	-		220
0482023907000	-		204	0482513607000	-		220
0482023908000	-		204	0482513610000	-		220
0482023927000	-		204	0482513611000	-		220
0482024000000	-		204	0482513704000	-		220
0482024001000	-		280	0482513705000	-		220
0482024003000	-		280	0482513802000	-		220
0482024005000	-		280	0482513803000	-		220
0482025301000	-	BS3526 (II32723)	207	0482513904000	-	0482513908000	220
0482025302000	-	BS3528 (II33903)	207	0482513905000	-	0482513909000	220
0482071007000	-	0482071011000	226	0482513908000	-		220
0482071008000	-	0482071011000	226	0482513909000	-		220
0482071011000	-		226	0482514206000	-	BS9295 (II33886)	223
0482074001000	-	0482074003000	226	0482514207000	-	BS9296 (II33648)	223
0482074002000	-	0482074003000	226	0482514310000	-	BS9395 (II32159)	224
0482074003000	-		226	0482514311000	-	BS9320 (II33767)	223
0482075007000	-	0482075011000	226	0482514312000	-	BS9321 (II33770)	223
0482075008000	-		226	0483003017000	-		270
0482075010000	-		226	0483003018000	-		270
0482075011000	-		226	0483003019000	-		270
0482101002000	-	0482102001000	280	0483004102000	-	0483004401000	270
0482101004000	-	0482102002000	280	0483004103000	-	0483004201000	270
0482101007000	-	0482102006000	280	0483004104000	-	0483004701000	270
0482102001000	-		280	0483004105000	-	0483004501000	270
0482102002000	-		280	0483004106000	-	0483004601000	270
0482102003000	-		280	0483004112000	-	0483004501000	270
0482102004000	-		280	0483004114000	-	0483004701000	270
0482102005000	-		280	0483004201000	-		270
0482102006000	-		280	0483004401000	-		270
0482102013000	-		280	0483004501000	-		270
0482102015000	-		280	0483004601000	-		270
0482102017000	-		280	0483004701000	-		270
0482102018000	-		280	0483005001000	-		275
0482102019000	-		280	0483005002000	-		275
0482201001000	-		209	0483005003000	-		275
0482201002000	-		209	0483005004000	-		275
0482510004000	-	BZ6517 (I66032)	214	0483005005000	-		275
0482510005000	-	BZ6507 (I54743)	214	0483005006000	-		275
0482512015000	-	BZ7312 (I74214)	212	0483005007000	-		275
0482512017000	-	BZ7313 (I74215)	212	0483005008000	-		275
0482512024000	-	BZ9324 (II37272)	212	0483005010000	-		275
0482512212000	-	BZ7419 (II19279)	212	0483005011000	-		275
0482512214000	-	BX9402 (II37276)	211	0483005012000	-		275
0482512215000	-	BX9401 (II37275)	211	0483005013000	-		275
0482512401000	-	BX9519 (II37277)	211	0484101001000	-	KU4108 (I68990)	161
0482512408000	-	BX9519 (II37277)	211	0484101003000	-		159
0482513001000	-	BY9000 (II18887)	220	0484101004000	-		159
0482513002000	-	BY9001 (II18888)	220	0484102002000	-	0484102026000	159
0482513003000	-	BY9000 (II18887)	220	0484102003000	-	0484102027000	159

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
0484102012000	-	0484102026000	159	0484460109000	-	LA8207 (II19204)	104
0484102013000	-	0484102027000	159	0484460111000	-	LA8234 (II30448)	105
0484102016000	-	0484102026000	159	0484460116000	-	LA8234 (II30448)	105
0484102017000	-	0484102027000	159	0484460131000	-	LA6228 (II94102)	103
0484102020000	-		159	0484460135000	-	LA8206 (II19375)	104
0484102021000	-		159	0484460153000	-		102
0484102026000	-		159	0484460158000	-	LA8203 (II19214)	104
0484102027000	-		159	0484460159000	-	LA8204 (II19215)	104
0484102028000	-		159	0484460160000	-	LA8205 (II19216)	104
0484102029000	-		159	0484460165000	-		103
0484103101000	-	KU4127 (I76874)	161	0484460167000	-	LA8220 (II19484)	104
0484103105000	-	KU4127 (I76874)	161	0484460168000	-	LA8221 (II19485)	104
0484150002000	-	KU1200 (I88448)	160	0484460169000	-	LA8222 (II19486)	104
0484150101000	-	KU1310 (II17354)	160	0484460170000	-		103
0484150102000	-	KU1310 (II17354)	160	0484460171000	-		103
0484150103000	-	KU1310 (II17354)	160	0484460173000	-	LA8233 (II30447)	105
0484150111000	-	KU1310 (II17354)	160	0484460177000	-		103
0484150112000	-	KU1311 (II17355)	160	0484460178000	-	LA8234 (II30448)	105
0484150113000	-	KU1305 (II33263)	160	0484460180000	-	LA8256 (II31477)	105
0484150114000	-	KU1304 (II33262)	160	0484460182000	-	LA8257 (II31478)	105
0484150117000	-	0484150119000	159	0484460183000	-	LA8253 (II31119)	105
0484150118000	-	0484150120000	159	0484460185000	-	LA8206 (II19375)	104
0484150119000	-		159	0484460186000	-		103
0484150120000	-		159	0484460187000	-	LA8209 (II19206)	104
0484204001000	-		254	0484460188000	-	LA8210 (II19207)	104
0484204002000	-		254	0484460189000	-	LA8211 (II19208)	104
0484205006000	-		251	0484460190000	-	LA8212 (II19209)	104
0484210001000	-		249	0484460191000	-	LA8207 (II19204)	104
0484210002000	-		249	0484460192000	-	LA8208 (II19205)	104
0484210004000	-		249	0484460193000	-	LA8228 (II30185)	104
0484210005000	-		249	0484460194000	-	LA8229 (II30443)	104
0484210006000	-		249	0484460195000	-	LA8284 (II37663)	105
0484210008000	-		249	0484460196000	-		103
0484210009000	-		249	0484460197000	-	LA8234 (II30448)	105
0484210010000	-		249	0484460198000	-	LA8228 (II30185)	104
0484210013000	-	0484210017000	249	0484460199000	-	LA8272 (II36257)	105
0484210015000	-		249	0484460200000	-	LA8273 (II36258)	105
0484210016000	-		249	0484460202000	-		103
0484210017000	-		249	0484460204000	-		103
0484210018000	-		249	0486000019000	-		179
0484351005000	-		169	0486000020000	-		179
0484351007000	-		169	0486000023000	-		179
0484351012000	-		169	0486000036000	-		179
0484450003000	-		108	0486000039000	-		179
0484451002000	-		108	0486000042000	-		179
0484451003000	-	0484451002000	108	0486000044000	-		179
0484451005000	-		108	0486000045000	-		179
0484451006000	-		108	0486000046000	-		179
0484451007000	-		108	0486000047000	-		179
0484451008000	-		108	0486000048000	-		179
0484451009000	-		108	0486000049000	-		179
0484451011000	-		108	0486000050000	-		179
0484451013000	-		108	0486000051000	-		179
0484451014000	-		108	0486000052000	-		179
0484451018000	-		108	0486000053000	-		179
0484451019000	-		108	0486000056000	-		179
0484460001000	-	LA6703 (I87496)	103	0486000064000	-		179
0484460007000	-	0484460021000	102	0486000065000	-		179
0484460008000	-	0484460022000	102	0486000070000	-		179
0484460021000	-		102	0486000089000	-		179
0484460022000	-		102	0486000091000	-		179
0484460023000	-		102	0486000092000	-		179
0484460024000	-		102	0486000093000	-		179
0484460102000	-	LA8235 (II30449)	105	0486000094000	-		179
0484460103000	-	LA8229 (II30443)	104	0486000095000	-		179
0484460106000	-	LA8257 (II31478)	105	0486000096000	-		179

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
0486000097000	-		179	0486104102000	-		174
0486000098000	-		179	0486104103000	-		174
0486000100000	-		179	0486104104000	-		174
0486000101000	-		179	0486104106000	-		174
0486000102000	-		179	0486104107000	-		174
0486000103000	-		179	0486104109000	-		174
0486000104000	-		179	0486104110000	-		174
0486000105000	-		179	0486104112000	-		174
0486000106000	-		179	0486104115000	-		174
0486000107000	-		179	0486104117000	-		174
0486000108000	-		180	0486104118000	-		174
0486000109000	-		180	0486104119000	-		174
0486000114000	-		180	0486105002000	-		174
0486000115000	-		180	0486105002000	-		188
0486000120000	-		180	0486200004000	-	0486200005000	195
0486000121000	-		180	0486200005000	-		195
0486000124000	-		180	0486200007000	-		195
0486000125000	-		180	0486200008000	-	0486200009000	195
0486000126000	-		180	0486200009000	-		195
0486000128000	-		180	0486200011000	-		195
0486000129000	-		180	0486200103000	-		195
0486000143000	-		180	0486200104000	-	0486200105000	195
0486000144000	-		180	0486200105000	-		195
0486000145000	-		180	0486200203000	-		195
0486000146000	-		180	0486201008000	-		175
0486000148000	-		180	0486201011000	-		175
0486000149000	-		180	0486201012000	-		175
0486000215000	-		180	0486201017000	-		175
0486001003000	-		180	0486201020000	-		175
0486001004000	-		180	0486202001000	-		175
0486001005000	-		180	0486202002000	-		175
0486001017000	-		180	0486202010000	-		175
0486001029000	-		180	0486202011000	-		175
0486001030000	-		180	0486203001000	-		195
0486002001000	-		180	0486203004000	-	0486203031000	195
0486002002000	-		180	0486203005000	-	0486203026000	195
0486010002000	-		183	0486203009000	-	0486203026000	195
0486104001000	-		173	0486203014000	-	0486203024000	195
0486104007000	-		173	0486203016000	-	0486203023000	195
0486104019000	-		173	0486203017000	-	0486203031000	195
0486104021000	-		173	0486203022000	-	0486203024000	195
0486104022000	-		173	0486203023000	-		195
0486104023000	-		173	0486203024000	-		195
0486104024000	-		173	0486203025000	-	0486203026000	195
0486104025000	-		173	0486203026000	-		195
0486104028000	-		174	0486203028000	-	0486203031000	195
0486104031000	-		174	0486203030000	-	0486203031000	195
0486104032000	-		174	0486203031000	-		195
0486104033000	-		174	0486203032000	-	0486203023000	195
0486104034000	-		174	0486203033000	-	0486203024000	195
0486104037000	-		174	0486203034000	-	0486203031000	195
0486104038000	-		174	0486204002000	-	0486203023000	195
0486104039000	-		174	0486204008000	-	0486204017000	195
0486104040000	-		174	0486204009000	-	0486204017000	195
0486104042000	-		174	0486204010000	-	0486204018000	195
0486104044000	-		174	0486204012000	-	0486204017000	195
0486104045000	-		174	0486204016000	-	0486204018000	195
0486104049000	-		174	0486204017000	-		195
0486104050000	-		174	0486204018000	-		195
0486104051000	-		174	0486204019000	-	0486204020000	195
0486104052000	-		174	0486204020000	-		195
0486104053000	-		174	0486204021000	-	0486203023000	195
0486104054000	-		174	0486204023000	-		195
0486104056000	-		174	0486204024000	-	0486204017000	195
0486104058000	-		174	0486204025000	-	0486204018000	195
0486104060000	-		174	0486204026000	-	0486203023000	195

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
0486205001000	-	0486205022000	195	0501100038000	-		267
0486205004000	-	0486205022000	195	0501100040000	-		267
0486205008000	-	0486205022000	195	0501100041000	-		267
0486205010000	-	0486205022000	195	0501100049000	-		266
0486205011000	-	0486205022000	195	0501100050000	-	0501100055000	267
0486205014000	-	0486205020000	195	0501100052000	-		267
0486205015000	-	0486205022000	195	0501100055000	-		267
0486205016000	-	0486205022000	195	0501100405000	-		266
0486205017000	-	0486205022000	195	0501100406000	-		266
0486205019000	-	0486205022000	195	0501100407000	-		266
0486205020000	-		195	0504002104000	-		267
0486205022000	-		195	0504002106000	-	0504002112000	267
0486206101000	-		248	0504002107000	-	0504002112000	267
0486206102000	-		248	0504002110000	-		267
0486206103000	-		248	0504002112000	-		267
0486206106000	-		248	0504002113000	-		267
0491051001000	-		248	0504002114000	-		267
0491060001000	-		280	0504003001000	-		265
0491060002000	-		280	0504003003000	-		265
0491060100000	-		280	0504003004000	-		265
0491060105000	-		280	0504004103000	-		267
0491060106000	-		280	0504004106000	-		267
0500004201000	-		259	0504004107000	-		267
0500004203000	-		259	0504004109000	-		267
0500004204000	-		259	0504004112000	-		267
0500005001000	-		259	0504004113000	-		267
0500005002000	-		259	0504050001000	-		266
0500005003000	-		259	0504050002000	-	0504050007000	266
0500005006000	-		259	0504050003000	-	0504050008000	266
0500005007000	-		259	0504050004000	-	0504050007000	266
0500005011000	-		259	0504050005000	-	0504050008000	266
0500005012000	-		259	0504050007000	-		266
0500005014000	-	0500005007000	259	0504050008000	-		266
0500005017000	-		259	0504050011000	-		266
0500005018000	-		259	0821302026	-		147
0500005101000	-		259	1011032000	-		94
0500005102000	-		259	1013099000	-		98
0500005104000	-		259	1013167000	-		98
0500005105000	-		259	1013200000	-		94
0500100005000	-		163	1013278000	-		98
0500100006000	-		163	1013283000	-		98
0500100007000	-		163	1013378000	-		98
0500401001000	-		169	1013383000	-		98
0501100009000	-		267	1013387000	-		98
0501100011000	-		267	1013393000	-		98
0501100012000	-		267	1013395000	-		98
0501100013000	-	0501100017000	267	1013397000	-		98
0501100014000	-	0501100029000	267	1013398000	-		98
0501100015000	-	0501100018000	267	1013491000	-		98
0501100016000	-	0501100040000	267	101916	-		125
0501100017000	-		267	101930	-		147
0501100018000	-		267	1023194000	-		130
0501100019000	-	0501100030000	267	1023275000	-		130
0501100020000	-	0501100030000	267	1023277000	-		130
0501100021000	-	0501100055000	267	1023280000	-		130
0501100023000	-	0501100405000	266	1023285000	-		130
0501100024000	-	0501100406000	266	1023288000	-		130
0501100025000	-	0501100041000	267	1023295000	-		130
0501100027000	-	0501100040000	267	1023298000	-		130
0501100028000	-	0501100041000	267	1023299000	-	1023298000	130
0501100029000	-		267	102607	-		130
0501100030000	-		267	103060	-		147
0501100031000	-		267	1031065000	-		112
0501100032000	-	0501100038000	267	1031087000	-		112
0501100033000	-	0501100055000	267	1031087903	-		110
0501100035000	-	0501100041000	267	104263	-		169

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
1043106000	-		136	1080380000	-		280
1043110000	-		136	1080386000	-		280
1043111000	-		136	109052	-		162
1043116000	-		136	1091858000	-		272
1043126000	-		136	1091995000	-	1092001000	272
1043130000	-		136	1091996000	-	1092002000	272
1043132000	-		136	1092001000	-		272
1043135000	-		136	1092002000	-		272
1043137000	-		136	109649	-		98
1043138000	-		136	109662	-		113
1051266000	-		200	109914	-		253
1051267000	-		200	1100512000	-		162
1051268000	-		200	1100521000	-		162
1051269000	-		200	1100551010	-		172
1051270000	-		200	1100552010	-		141
1051271000	-		200	1100564000	-		141
1051272000	-		200	1100567000	-		172
1051273000	-		200	1100575000	-		152
1051286000	-		200	1100576000	-		152
1051287000	-		200	1100578000	-		152
1051288000	-		200	1100586000	-		147
1051289000	-		200	1101566000	-		152
1051290000	-		200	1101574000	-		152
1051291000	-		200	1101575000	-		152
1051292000	-		200	1101576000	-		152
1051293000	-		200	1101577000	-		152
1051298000	-		200	1101585000	-		152
1051299000	-		200	1101586000	-		152
1051310000	-		200	1101587000	-		152
1051311000	-		200	1101588000	-		152
1051312000	-		200	1101589000	-		152
1051313000	-		200	1101595000	-		152
1051319000	-		200	1101685000	-	1101785000	152
1051320000	-		200	1101686000	-		152
1051322000	-		200	1101687000	-		152
1051323000	-		200	1101688000	-		152
1051325000	-		200	1101691000	-		152
1051338000	-		200	1101785000	-		152
1051339000	-		200	1101786000	-		152
1051346000	-		200	1101788000	-		152
1053222000	-		200	1110711000	-		111
1053223000	-		200	1111308000	-		251
1053227000	-		200	1111313000	-		252
1053228000	-		200	1111314000	-		228
1053233000	-		200	1111316000	-		251
1053234000	-		200	1111319000	-		251
1053245000	-		226	1111324000	-		252
1061261000	-		200	1111326000	-		108
1061261080	-		200	1111328000	-		121
1061266000	-		201	1111340000	-		125
1061266080	-		201	1111341000	-		125
1061268000	-		201	1111348000	-		121
1061268080	-		201	1111360000	-		228
1063208000	-		201	1111364000	-		251
1063209000	-		201	1111375000	-		125
107022	-		154	1111378000	-		125
1071288000	-		209	1111381000	-		125
1071298000	-		209	1111382000	-		125
107507	-		98	1111383000	-		125
107740	-		149	1111384000	-		125
1080350000	-		280	1111385000	-		125
1080354000	-		280	1111387000	-		125
1080355000	-		280	1111394000	-		121
1080356000	-		280	1111395000	-		121
1080366000	-		280	1111413000	-		159
1080376000	-		280	1111414000	-		136

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
1111415000	-		136	1185277	-	1188881-02	220
1111419000	-		164	1185688	-	275491	113
1111421000	-	ZB1220 (SEB00255)	254	1185774	-	LA8206 (II19375)	104
1111425000	-	1111525000	149	1185782	-	295476	251
1111430000	-		169	1185829	-	AS3050A	162
1111431000	-	AE1223 (SEB00669)	170	1185834	-		106
1111431000000	-	AE1223 (SEB00669)	170	1186500	-	1186699-01	196
1111437000	-		170	1186502	-		94
1111470000	-		110	1186505	-		102
1111471000	-		163	1186506	-		141
1111479000	-		110	1186512	-	274422	197
1111491000	-		163	1186513	-	1186702-01	196
1111493000	-		121	1186526	-		141
1111494000	-		110	1186540	-	LA8234 (II30448)	105
1111497000	-		121	1186540-1	-	LA8245 (II30810)	105
1111498000	-		121	1186544	-		113
1111500000	-		121	1186550	-	1186699-01	196
1111501000	-		121	1186551	-	1194215	94
1111503000	-		121	1186577	-	1188823	226
1111507000	-		121	1186579	-	274424	197
1111509000	-		121	1186580	-	LA8229 (II30443)	104
1111518000	-		121	1186584	-		210
1111519000	-		164	1186587	-	LA6709 (I98136)	103
1111521000	-		149	1186591	-	LA6711 (II36936000)	103
1111522000	-		149	1186606-01	-	K2B0502XU	213
1111523000	-		149	1186616	-		94
1111523000000	-	KX1294/2	149	1186677	-		136
1111525000	-		149	1186697-01	-	2430GCMLS	215
1111526000	-		149	1186698	-		106
1111527000	-		149	1186699-01	-		196
1111661000	-		248	1186699-02	-	1186699-01	196
1111693000	-		111	1186699-03	-	1186699-01	196
1111695000	-		111	1186699-04	-	1186699-01	196
1111696000	-		111	1186699-05	-	1186699-01	196
1111698000	-		111	1186699-06	-	1186699-01	196
1111730000	-		259	1186700-01	-		196
1111731000	-		259	1186700-02	-	1186700-01	196
1111762000	-		259	1186700-03	-	1186700-01	196
1111790000	-		259	1186700-04	-	1186700-01	196
1111792000	-		259	1186700-05	-	1186700-01	196
1111793000	-		259	1186700-06	-	1186700-01	196
1111853000	-		141	1186700-07	-	1186700-01	196
1111950000	-		141	1186701-01	-		196
1111951000	-		141	1186701-02	-	1186701-01	196
1111965000	-		141	1186701-03	-	1186701-01	196
1111980000	-		141	1186701-04	-	1186701-01	196
1111995000	-		141	1186702-01	-		196
1111996000	-		141	1186702-02	-	1186702-01	196
1111999000	-		141	1186702-03	-	1186702-01	196
1112001000	-		141	1186702-04	-	1186702-01	196
1112002000	-		141	1186715	-	AC574AXY	147
1113330000	-		253	1186720	-	1189106	98
1113331000	-		253	1186721	-	KZ996/2	99
1113336000	-		253	1186722	-	1186722SP	98
114/1/5	-		159	1186722SP	-		98
1141975000	-		177	1186732-01	-	K2E4001XU	218
1142350000	-		110	1186732-01RM	-	K2E4001XU	218
1149300110	-		110	1186733-01	-		202
1149300112	-		110	1186753	-		226
1185145	-		113	1186754	-		226
1185148	-	295531	197	1186762	-	295473	251
1185157	-		240	1186765	-	LA8234 (II30448)	105
1185177	-	1186702-01	196	1186831	-		163
1185192	-	1186701-01	196	1186841	-		136
1185221	-	295556	197	1186872	-		238
1185252	-		102	1186874	-	1188782-01	196

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
1186883-08	-		196	1188909	-	AC574A	147
1186885-01	-	1189229-01	196	1188924	-	LA8700 (II30184)	105
1186885-02	-	1189229-01	196	1188931	-	LA6735 (I98189)	103
1186885-03	-	1189229-01	196	1188975	-		249
1186885-04	-	1189229-01	196	1188978	-	SK2973/1	208
1186885-05	-	1189229-01	196	1188979	-	SK2973/2	208
1186892	-		149	1188980	-	SK2973/3	208
1186893	-	295554	197	1188981	-	SK2973/4	208
1186894	-	295555	197	1188994	-	LA8220 (II19484)	104
1186895	-	295556	197	1188995	-	LA6709 (I98136)	103
1186937	-	LA8234 (II30448)	105	1189016	-	SK2973/5	208
1186938	-		141	1189031	-		177
1187001	-		180	1189040	-	LA8229 (II30443)	104
1187002	-		180	1189065	-		141
1188230	-		249	1189067	-		240
1188231	-		249	1189072-01	-		202
1188550	-	KZ433/6	99	1189075SP	-		180
1188550VE	-	KZ433/6	99	1189076SP	-		177
1188664	-		125	1189079-01	-		196
1188738	-	274424	197	1189079-02	-	1189079-01	196
1188742	-	1188881-01	220	1189083	-		177
1188768	-		130	1189089	-	LA8226 (II30180)	104
1188780	-		113	1189096	-		141
1188781-01	-		196	1189097	-		141
1188781-02	-	1188781-01	196	1189100	-		94
1188781-03	-	1188781-01	196	1189106	-		98
1188781-04	-	1188781-01	196	1189107	-		98
1188781-05	-	1188781-01	196	1189126	-	LA8245 (II30810)	105
1188782-01	-		196	1189163	-	LA8227 (II30181)	104
1188782-02	-	1188782-01	196	1189174	-	1189495	94
1188782-03	-	1188782-01	196	1189198	-	1189499	94
1188782-04	-	1188782-01	196	1189199	-	1189498	94
1188782-05	-	1188782-01	196	1189200	-	1189497	94
1188782-06	-	1188782-01	196	1189229-01	-		196
1188782-07	-	1188782-01	196	1189229-02	-	1189229-01	196
1188782-08	-	1188782-01	196	1189229-03	-	1189229-01	196
1188782-11	-	1188782-01	196	1189229-04	-	1189229-01	196
1188782-12	-	1188782-01	196	1189229-05	-	1189229-01	196
1188782-13	-	1188782-01	196	1189281	-	295556	197
1188782-14	-	1188782-01	196	1189282	-	274424	197
1188782-15	-	1188782-01	196	1189283	-	274424	197
1188783-01	-		196	1189301	-	295555	197
1188783-02	-	1188783-01	196	1189316	-	1186701-01	196
1188783-03	-	1188783-01	196	1189317	-	1186701-01	196
1188783-04	-	1188783-01	196	1189381	-	1189495	94
1188791	-	LA8206 (II19375)	104	1189383	-	1189497	94
1188793	-		125	1189384	-	1189498	94
1188801	-	LA8223 (II30178)	104	1189385	-	1189499	94
1188823	-		226	1189389	-		130
1188824XU	-		226	1189392	-		113
1188844	-		98	1189393000	-		113
1188845	-		226	1189394000	-		113
1188850	-	295555	197	1189395000	-		113
1188851	-		240	1189396000	-		113
1188852	-	LA8222 (II19486)	104	1189406	-	295556	197
1188854	-	LA8222 (II19486)	104	1189423	-	SK2973/1	208
1188856	-	274422	197	1189423SP	-	SK2973/1	208
1188858	-		177	1189424	-	SK2973/2	208
1188859	-	AC574BXY	147	1189424SP	-	SK2973/2	208
1188880	-	LA8243 (II30651)	105	1189425	-	SK2973/3	208
1188881-01	-		220	1189425SP	-	SK2973/3	208
1188881-02	-		220	1189426	-	SK2973/4	208
1188882-01	-		216	1189426SP	-	SK2973/4	208
1188899	-		216	1189427	-	SK2973/5	208
1188906	-		249	1189427SP	-	SK2973/5	208
1188907	-		249	1189435	-		196

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
1189439	-		94	1194384	-		238
1189448	-	1186700-01	196	1194387	-		238
1189449	-		226	1194410	-	LP4857 (K000821)	100
1189458	-		226	1194415	-	LP4937 (II16417)	100
1189470	-		196	1194453	-	BS7309 (II39355F000)	222
1189471	-	LA8224 (II30182)	104	11M018M	-		240
1189481	-	1189500	94	1251616000	-		196
1189483	-		238	1251618000	-		196
1189484	-		238	1251624000	-		196
1189489000	-		113	1252016000	-		196
1189490	-	274425	197	1252021000	-		196
1189492	-		130	1252031000	-		197
1189495	-		94	1252405000	-		197
1189497	-		94	1252416000	-		197
1189498	-		94	1252417000	-		197
1189499	-		94	1252423000	-		197
1189500	-		94	1252433000	-		197
1190392	-		177	1252434000	-		197
1194016	-		163	131.720	T4300-I	T4300-I (131.776)	241
1194101	-		156	131.721	T4300-D	T4300-D (131.777)	241
1194128	-	LA8234 (II30448)	105	131.766	T3700-I	T3700-I (131.790)	241
1194130	-		248	131.767	T3700-D	T3700-D (131.791)	241
1194131	-		248	131.774	T4300-I	T4300-I (131.776)	241
1194132	-		248	131.775	T4300-D	T4300-D (131.777)	241
1194135	-		98	131.776	T4300-I		241
1194136	-	295556	197	131.777	T4300-D		241
1194139	-	1186700-01	196	131.790	T3700-I		241
1194140	-	1186700-01	196	131.791	T3700-D		241
1194141	-	1186700-01	196	1406643	SF1		273
1194150	-	LA8223 (II30178)	104	1407023	SF3		273
1194152	-	1188782-01	196	1407631	SF7		273
1194180	-	LA8234 (II30448)	105	1407704	SF8		273
1194182	-	1188782-01	196	1408320	SF10		273
1194188	-	LA8226 (II30180)	104	1408387	SF11		273
1194189	-		94	1408824	SF13		273
1194191	-	295554	197	1409284	SF17		273
1194194	-		98	1409285	SF18		273
1194201	-	295554	197	1409287	SF20		273
1194208	-	1186701-01	196	1409570	SF21		273
1194211	-	LA8227 (II30181)	104	1409870	SF23		273
1194213	-	LA6709 (I98136)	103	1420362	SF30		273
1194215	-		94	1420879	SF34		273
1194217	-	LA8223 (II30178)	104	1422149	SF38		273
1194218	-	LA8223 (II30178)	104	1422762	SF42		273
1194224	-	BX3419 (II33782)	197	1424107	SF43		273
1194228	-	LA8224 (II30182)	104	1424371	SF44		273
1194250	-		238	1427432000	-		110
1194251	-		238	1487432006	-		110
1194252	-		238	1487434010000	-	II38789F004	106
1194253	-		238	1487434016000	-	II40100F	106
1194258	-	295555	197	1487434901000	-	II40100F	106
1194259	-	295555	197	1487434903000	-	II38789F004	106
1194263	-		229	1489992111	-		147
1194264	-		229	1497434100000	-	II40100F	106
1194275	-		98	1497434102000	-	II40100F	106
1194282	-	295555	197	1497434103000	-	II40100F	106
1194288	-	1186702-01	196	1497434301000	-	II40100F	106
1194309	-	LA8226 (II30180)	104	1497434303000	-	II40100F	106
1194325	-		125	1497434900000	-	II40100F	106
1194339	-		149	1497434902000	-	II40100F	106
1194357	-		98	1987434001000	-	II40100F	106
1194360	-		238	1987434016390	-	II40100F	106
1194361	-		238	2024GCMSS	-		215
1194362	-		238	2024GCSS	-		215
1194363	-		238	205948	-		240
1194370	-		196	217380	-		121

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
223220	-		252	2264462400000	-		181,190
224417	-	274997	149	2264462403000	-		183
2264460307000	-		184	2267200314000	-	EZ1022 (II36381)	187,188,194
2264460310000	-		186	2267200315000	-		188
2264460311000	-		186	226908	-	226908-1	110
2264460312000	-		186	226908-1	-		110
2264460313000	-		186	228078	-		121
2264460314000	-		186	228663	-		109
2264460315000	-		186	228691	-	274999	149
2264460332000	-		186	228750	-	295473	251
2264460334000	-		186	228790	-		240
2264460336000	-		186	228791	-		240
2264460337000	-		186	228801	-		240
2264461302000	-		184	229666	-		136
2264461304000	-		184	229813	-		149
2264461307000	-		184	229990	-		99
2264461308000	-		184	2424GCLS	-		215
2264461309000	-		184	2424GCMLS	-		215
2264461310000	-		184	2430GCLS	-		215
2264461313000	-		184	2430GCMEXLS	-		215
2264461316000	-		184	2430GCMEXLSA	-	2430GCMEXLS	215
2264461321000	-		184	2430GCMLS	-		215
2264461322000	-		184	2430GCMLSA	-	2430GCMLS	215
2264461323000	-		184	2652.0	-		162
2264461324000	-		184	267000	-	269827SP	102
2264461327000	-		184	267002	-		102
2264461333000	-		184	267013	-	267037	251
2264461354000	-		184	267015	-	1189395000	113
2264461355000	-		184	267024	-	272295	251
2264462328000	-		184	267026	-		238
2264462330000	-		181	267027	-		238
2264462345000	-		181	267037	-		251
2264462346000	-		181	267051	-		113
2264462349000	-		181	267060	-	267121SP	102
2264462355000	-		184	267077	-		130
2264462368000	-		184,189	267083	-		238
2264462369000	-		184,189	267084	-		238
2264462370000	-		184,189	267085	-		102
2264462371000	-		184,189	267086	-		240
2264462372000	-		189	267088	-	295555	197
2264462373000	-		177,183,191	267094	-	274424	197
2264462374000	-		183,191	267098	-		113
2264462375000	-		183,191	267101	-	1189489000	113
2264462376000	-		191	267105	-		136
2264462377000	-		191	267113	-	267121SP	102
2264462378000	-		191	267114	-		147
2264462379000	-		191	267121SP	-		102
2264462380000	-		183,191	267122SP	-		102
2264462381000	-		191	267125SP	-		106
2264462382000	-		191	267135	-	295531	197
2264462383000	-		191	267136	-	295530	197
2264462384000	-		191	269600	-		238
2264462386000	-		177,184,189	269613	-	295579	130
2264462387000	-		189	269700	-		240
2264462388000	-		189	269712	-		113
2264462389000	-		189	269717	-		238
2264462390000	-		184,189	269733	-		113
2264462391000	-		183,190	269734	-		197
2264462392000	-		183,190	269749	-	267121SP	102
2264462393000	-		190	269752	-		130
2264462394000	-		190	269753	-		125
2264462395000	-		190	269760SP	-		249
2264462396000	-		181,190	269767	-	295491	251
2264462397000	-		181,190	269785	-	274424	197
2264462398000	-		181,190	269786	-	228663	109
2264462399000	-		190	269799	-	274746	252

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
269807	-		102	274829	-		113
269810	-	295474	251	274836	-	277516	170
269827	-	269827SP	102	274837	-	295494	239
269827SP	-		102	274838	-		99
269846	-	295393	125	274949	-		240
269857	-	269600	238	274958	-		125
269858	-		238	274966	-	271650	197
269859	-		238	274971	-		239
269880	-	267122SP	102	274996	-		149
269889	-	274423	197	274997	-		149
269890	-	274423	197	274998	-		149
269891	-	274423	197	274999	-		149
271650	-		197	275107	-	229666	136
271650-50	-	271650	197	275150	-		160
271721	-		99	275200	-		113
271906	-		121	275472	-		122
272015	-		238	275491	-		113
272016	-		238	275508	-		113
272017	-		238	277144	-		125
272018	-		238	277147	-		122
272021	-	274423	197	277148	-		122
272022	-	274423	197	277215	-	295393	125
272033	-	295491	251	277222	-	277148	122
272049	-	269712	113	277227	-		122
272074	-	274423	197	277484	-	275491	113
272092	-	1186700-01	196	277486	-		113
272093	-	295555	197	277508	-	277486	113
272094	-	1186702-01	196	277516	-		170
272098	-	1186701-01	196	277558	-	295452	125
272099	-	269827SP	102	277812	-	275491	113
272126	-	1189396000	113	277971	-		122
272132	-		238	278035	-		239
272133	-		238	278039	-		239
272227	-	295554	197	278111	-		239
272278	-	274423	197	278112	-		239
272295	-		251	278312	-		239
272817	-		108	278325	-		239
272844	-		238	278326	-		239
272845	-		238	278426	-	274958	125
272862	-		238	278427	-		125
272863	-		238	278483	-		149
272897	-	II40100F	106	278850	-		160
272897SP	-		106	278851	-		160
272902	-		125	279180	-		147
272917	-		240	279750	-		130
272921	-		99	279985	-		170
272967	-	1188782-01	196	280235	-	277516	170
272970	-	1188782-01	196	280375	-		147
274420	-		197	280737	-	272921	99
274421	-		197	281058	-	1189392	113
274422	-		197	281857	-		125
274423	-		197	281865	-		162
274423-45	-	274423	197	281966	-		239
274424	-		197	281967	-		239
274425	-		197	281969	-	278112	239
274520	-		240	281972	-		239
274580	-		136	284142	-		253
274602	-	274746	252	284727	-		136
274657	-		238	286171	-		130
274671	-		164	286880	-		130
274675	-	274422	197	286965	-		239
274678	-	274423	197	286968RM	-	286968XU	106
274746	-		252	286968XU	-		106
274780	-	295473	251	288323	-		122
274781	-	295476	251	288374	-		170
274785	-		122	288417	-		149

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
288753	-		239	295556	-		197
289257	-		99	295567	-		239
289714	-		149	295571	-	269827SP	102
295035	-		125	295579	-		130
295036	-		164	295591	-		102
295071	-		147	30010011-4	-		197
295078	-	KX2068/5	112	30010011-4/I	-	BZ3259 (II39906F)	198
295095	-	280375	147	30010020-4	-		197
295137	-	274958	125	30010027-4	-		197
295148	-		239	30010032	-		197
295178	-		239	30010033	-		197
295183	-		239	30010034	-		197
295184	-		239	30010035	-		197
295188	-	KX2068/1	112	30010039	-		197
295198	-		147	30010077/A	-		197
295199	-		147	30010077/R	-		197
295201	-	1189393000	113	30010080	-		197
295226	-		239	30010081	-		197
295249	-	280375	147	30010087	-		197
295277	-		240	30020230	-		197
295278	-		240	30024284	-		197
295295	-		147	30024286	-		197
295305	-	295295	147	30030001-1	-		170
295312	-	277516	170	30030001-2	-		170
295332	-	274423	197	30030002	-		149
295333	-	274423	197	30030003	-		149
295334	-		239	30030009	-		160
295358	-		164	30030009-1	-		160
295365	-	274424	197	30030010	-		160
295388	-		239	30030010-1	-		160
295389	-		239	30030384	-		197
295393	-		125	3030GCLS	-		215
295397	-	277148	122	3030GCMLS	-		215
295407	-		239	31162420	BZ1624		211
295408	-		239	31242450	BZ2424		211
295452	-		125	3130499008	-		110
295458	-	295476	251	340.029.001	-		201
295468	-		239	350103	-		244
295469	-	278312	239	350991	-		244
295473	-		251	351032	-		244
295474	-		251	351096	-		244
295476	-		251	351605	-		244
295477	-	295473	251	352281	-		244
295478	-	295491	251	352327	-		244
295481	-	295473	251	365.0716.5	-		254
295482	-	295476	251	365.0722.5	-		254
295485	-	295476	251	365.0916.5	-		254
295491	-		251	365.0922.5	-		254
295492	-	KX2068/2	112	3660.0	KU4124		161
295494	-		239	3661.0	KU4124		161
295517	-		240	381396	-	SK2973/1	208
295518	-		240	381398	-	SK2973/3	208
295521	-		109	381400	-	SK2973/5	208
295522	-	KX2068/2	112	381407	-	SK2973/3	208
295525	-	KX2045/11000	127	381408	-	SK2973/4	208
295528	-	295199	147	443612000000	-		108
295529	-	295295	147	443612001005	-		254
295530	-		197	443612001006	-		254
295531	-		197	443612001007	-		254
295532	-		197	443612001008	-		254
295533	-		197	443612001011	-		254
295534	-		197	443612001012	-		254
295535	-		197	443612011001	-		108
295550	-	KX2068/7	112	443612012000	-		108
295554	-		197	443612061001	-		111
295555	-		197	443612061003	-		111

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
443612061702	-		111	443612402001	-		141
443612074700	-		118	443612403007	-		144
443612074701	-		118	443612403008	-		144
443612074702	-		118	443612403016	-		144
443612074703	-		118	443612403022	-		144
443612074704	-		118	443612403023	-		144
443612074706	-		118	443612407002	-		144
443612081001	-		164	443612407005	-		144
443612081004	-		164	4528040120	-		160
443612081005	-		164	454448	-		240
443612086010	-		125	465.0716.5	-		254
443612161006	-		201	465.0722.5	-		254
443612164002	-		201	465.0922.5	-		254
443612164003	-		201	465.1712.5	-		254
443612164007	-		201	465.1714.5	-		254
443612164008	-		201	465.1716.5	-		254
443612164009	-		201	465.1718.5	-		254
443612164012	-		201	465.1722.5	-		254
443612164015	-		201	465.1814.5	-		254
443612164016	-		201	465.1816.5	-		254
443612164019	-		201	465.1822.5	-		254
443612164020	-		201	465.2082.5	-		254
443612165020	-		201	465.9912.2	-		254
443612165021	-		201	5000824	-		170
443612193010	-		226	5001327	-		180
443612193011	-		226	5003983	-		164
443612193012	-		226	622107AM	-		272
443612193013	-		226	622108AM	-	622199AM	272
443612193017	-		226	622109AM	-		272
443612193018	-		226	622110AM	-		272
443612193019	-		226	622190AM	-		272
443612193020	-		226	622199AM	-		272
443612193022	-		226	622206AM	-	626162AM	272
443612193025	-		226	622402AM	-	625586AM	272
443612193026	-		226	622500AM	-	628277AM	273
443612193027	-		226	622501AM	-	628276AM	273
443612226003	-		130	622502AM	-		272
443612226005	-		130	622503AM	-	626693AM	272
443612226007	-		130	622504AM	-		272
443612226013	-		130	622508AM	-	628450AM	273
443612226016	-		130	623104AM	-		276
443612229000	-		130	623105AM	-		276
443612230002	-		130	623106AM	-		276
443612241000	-		130	623109AM	-		276
443612241003	-		130	623160AM	-		276
443612280001	-		147	623172AM	-	626761AM	276
443612280704	-		144	624199AM	-		272
443612281003	-		147	624248AM	-		276
443612302000	-		162	624410AM	-		272
443612302001	-		156	624445AM	-	627612AM	272
443612305702	-		156	624502AM	-		276
443612305708	-		156	624503AM	-		276
443612305752	-		156	624652AM	-	627498AM	272
443612307702	-		156	624692AM	-	626760AM	276
443612317000	-		156	625111AM	-	628275AM	273
443612323000	-		162	625290AM	-		272
443612341000	-		141	625291AM	-		272
443612346000	-		147	625359AM	-		272
443612347000	-		156	625384AM	-		272
443612356000	-		149	625385AM	-	626162AM	272
443612356001	-		149	625436AM	-	628027AM	272
443612361000	-		164	625524AM	-		272
443612387700	-		160	625559AM	-		272
443612387703	-		160	625586AM	-		272
443612401000	-		141	625671AM	-		272
443612401004	-		141	625826AM	-		276

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
626104AM	-	627497AM	272	9481211435	-		184
626159AM	-		276	9481211436	-		185
626162AM	-		272	9481211437	-		185
626169AM	-		276	9481211438	-		185
626392AM	-		272	9484210014000	-	0484101004000	159
626393AM	-	626392AM	272	9484210015000	-	0484101003000	159
626397AM	-		272	AC1003	-		240
626400AM	-	628450AM	273	AC135A	-	AC135AZ	115
626564AM	-		276	AC135AK	-	AC135AZ	115
626565AM	-		276	AC135AY	-	AC135AYZ	115
626580AM	-	628275AM	273	AC135AYK	-	AC135AYZ	115
626639AM	-		272	AC135AYZ	-		115
626642AM	-	628276AM	273	AC135AZ	-		115
626693AM	-		272	AC135BK	-	AC135BZ	115
626708AM	-	628277AM	273	AC135BXK	-	AC135BXZ	115
626760AM	-		276	AC135BXZ	-		115
626761AM	-		276	AC135BZ	-		115
626762AM	-		276	AC135CK	-	AC135CZ	115
626783AM	-	628450AM	273	AC135CZ	-		115
626784AM	-	628275AM	273	AC135FXK	-	AC135FXZ	115
626785AM	-	628276AM	273	AC135FXZ	-		115
626786AM	-	628277AM	273	AC135HY	-	AC135HYZ	115
626789AM	-	628306AM	273	AC135HYK	-	AC135HYZ	115
626853AM	-		272	AC135HYZ	-		115
626869AM	-	628447AM	273	AC135LYK	-	AC135LYZ	115
626871AM	-	628446AM	273	AC135LYZ	-		115
627026AM	-		272	AC136AK	-	AC136AZ	115
627232AM	-		276	AC136AZ	-		115
627233AM	-		276	AC150A	-		125
627497AM	-		272	AC150B	-		125
627498AM	-		272	AC150BK	-		125
627499AM	-		272	AC150E	-		125
627579AM	-	628448AM	273	AC151A	-		125
627589AM	-	628449AM	273	AC151B	-		125
627612AM	-		272	AC151D	-		125
627667AM	-	628258AM	273	AC152AA	-		125
627668AM	-	628259AM	273	AC152DA	-		126
627669AM	-	628260AM	273	AC152DX	-		126
627692AM	-		272	AC152HA	-		126
628027AM	-		272	AC152LA	-		126
628036AM	-		273	AC154A	-		126
628258AM	-		273	AC155A	-		126
628259AM	-		273	AC155B	-		126
628260AM	-		273	AC155C	-		126
628275AM	-		273	AC155D	-		126
628276AM	-		273	AC155E	-		126
628277AM	-		273	AC155F	-		126
628306AM	-		273	AC155FA	-		126
628446AM	-		273	AC155G	-		126
628447AM	-		273	AC156A	-		126
628448AM	-		273	AC156B	-		126
628449AM	-		273	AC156C	-		126
628450AM	-		273	AC156D	-		126
628492AM	-		273	AC156E	-		126
628493AM	-		273	AC157A	-		126
628494AM	-		273	AC157B	-		126
65611625	-	KY2193/1	142	AC157C	-		126
65611672	-	KY2184/1	142	AC157D	-		126
65611689	-	KY2248/1	142	AC157E	-		126
65654868	-	VPS48HI	120	AC157F	-		126
65830001	AS3000A	AS3000A (SEB00407)	162	AC157G	-		126
9480212130	-		197	AC157H	-		126
9481211431	-		184	AC157L	-		126
9481211432	-		184	AC157M	-		126
9481211433	-		184	AC157N	-		126
9481211434	-		184	AC157P	-		126

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
AC170A	-		152	AC555A	-		162
AC170B	-	DB2122 (I86158)	153	AC555AK	-		162
AC170C	-	DB2118 (I86156)	153	AC556A	-		162
AC170D	-	DB2115 (I86154)	153	AC556AK	-		162
AC170E	-	DB2121 (I86157)	153	AC560AA	-		162
AC170F	-		152	AC560BAK	-		162
AC175A	-		154	AC563BK	-		162
AC175C	-		154	AC56AG	-		94
AC175D	-		154	AC570A	-	AC574AXY	147
AC176A	-		154	AC570AX	-		147
AC180B	-		152	AC570B	-	AC574AXY	147
AC180BX	-		152	AC570C	-	AC574AXY	147
AC185A	-		152	AC570D	-	AC574AXY	147
AC185B	-		152	AC570DX	-	AC574AXY	147
AC222D	-		170	AC571AX	-	AC574AXY	147
AC253BK	-		164	AC574A	-		147
AC280RN	-		170	AC574AX	-		147
AC285B	-		278	AC574AXY	-		147
AC286A	-		172	AC574AY	-		147
AC320A	-		201	AC574BX	-		147
AC321A	-		201	AC574BXY	-		147
AC321E	-		201	AC574BY	-		147
AC324C	-		201	AC574BYW	-		147
AC324D	-		201	AC574BYZ	-		147
AC334A	-		201	AC574CXY	-		147
AC334B	-	AC334A	201	AC575A	-		147
AC336A	-		201	AC575AK	-		147
AC354B	-		201	AC576A	-		147
AC354C	-		201	AC576AK	-		147
AC356C	-		201	AC577A	-		147
AC360PA	-		201	AC577AA	-		147
AC361PA	-		201	AC577B	-		147
AC370A	-		201	AC579A	-		147
AC375A	-		280	AC579B	-		147
AC390PBX	-		281	AC581A	-		147
AC391DX	-		281	AC583A	-		147
AC392BA	-		281	AC586A	-		147
AC396B	-		281	AC586AA	-		147
AC397A	-		281	AC586AAX	-		147
AC398A	-		281	AC586AX	-		147
AC398B	-		281	AC586AY	-		147
AC399A	-		281	AC590A	-		156
AC399B	-		281	AC590D	-	AC590A	156
AC424A	-		160	AC595A	-		156
AC424B	-		160	AC595B	-		156
AC424C	-		160	AC595C	-		156
AC424G	-		160	AC595E	-		156
AC424H	-		160	AC595F	-		156
AC424L	-		160	AC596A	-		156
AC424M	-		160	AC597A	-		156
AC426A	-		160	AC597B	-		156
AC426B	-		160	AC597BA	-		156
AC450A	-		160	AC597BZ	-		156
AC451A	-		160	AC597C	-		156
AC465A	-		160	AC597D	-		156
AC466A	-		160	AC598A	-		156
AC466AK	-	AC466A	160	AC598B	-		156
AC474AA	-		160	AC598C	-		156
AC475AA	-		160	AC599A	-		156
AC476BA	-	KU1310 (II17354)	160	AC62ZAG	-		94
AC477BA	-	KU1311 (II17355)	160	AC63ZA	-	AC63ZAG	94
AC479A	-		160	AC63ZAG	-		94
AC480A	-		160	AC63ZB	-	AC63ZBG	94
AC480B	-		160	AC63ZBG	-		94
AC481A	-		160	AC64ZCG	-		94
AC481B	-		160	AC64ZD	-	AC64ZDG	94

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
AC64ZDG	-		94	B238661	-		240
AC656A	-		209	B481233117000	-	0486200105000	195
AC656AX	-		209	B86617	-		192
AC656BA	-		209	BFM105BK	-		216
AC656C	-		209	BFM105BY	-	BY9150 (II16486)	217
AC656D	-		209	BFM105CX	-	BFM105CXK	216
AC657AA	-		209	BFM105CXK	-		216
AC657C	-		209	BFM105DXK	-		216
AC657CX	-		209	BFM121BK	-		216
AC658CB	-		209	BFM121BX	-		216
AC659AA	-		209	BFM121BXK	-		216
AC67AX	-	AC67AZG	94	BFM121BY	-	BY9205 (II17468)	217
AC67AZG	-		94	BFM121CK	-	BFM121CXK	216
AC75A	-	ACX76ZB	99	BFM121CXK	-		216
AC75ZA	-	ACX76ZB	99	BFM121CY	-	BY9207 (II17470)	217
AC75ZAG	-	ACX76ZB	99	BFM121EK	-		216
AC784B	-		254	BFM121EY	-	BY9205 (II17468)	217
AC784D	-		254	BFM122BK	-		216
AC951A	-		112	BFM141BK	-		216
AC972A	-		110	BFM141BY	-	BY9251 (II17472)	217
ACX61ZA	-	ACX61ZAG	94	BFM141CK	-		217
ACX61ZAG	-		94	BFM161BY	-	BY9305 (II17474)	217
ACX61ZC	-	ACX61ZCG	94	BFM162BY	-	BY9306 (II17475)	217
ACX61ZCG	-		94	BFM162Y	-	BY9300 (II15571)	217
ACX66B	-	ACX66BG	94	BFM181Y	-	BY9350 (I98822)	218
ACX66BG	-		94	BFM201Y	-	BY9400 (I98823)	218
ACX67A	-	ACX67AAG	94	BFM201YA	-	BY9402 (II16567)	218
ACX67AA	-	ACX67AAG	94	BFM221Y	-	BY9450 (I98824)	218
ACX67AAG	-		94	BFM241Y	-	BY9500 (I98825)	218
ACX67BA	-	ACX67BAG	94	BR56	-		145
ACX67BAG	-		94	BS9555	BS9555		225
ACX68A	-	ACX68D	94	BS9556	BS9556		225
ACX68AS	-	ACX68D	94	BS9557	BS9557		225
ACX68D	-		94	BY3109	BY3109	EF90AY	203
ACX69A	-	ACX69D	94	BY3159	BY3159	EF105FY	202
ACX69AS	-	ACX69D	94	BY3405	BY3405	EF201BY	203
ACX69CX	-	ACX69DX	94	BY3455	BY3455	EF221BY	203
ACX69D	-		94	C56918	-		192
ACX69DX	-		94	CP1A	-		170
ACX75ZB	-	ACX76ZB	99	CP1C	-		170
ACX75ZF	-	ACX75ZFG	99	CP3A	-		170
ACX75ZFG	-		99	CP4A	-		170
ACX75ZG	-	ACX75ZGG	99	CP4C	-		170
ACX75ZGG	-		99	CP6A	-		170
ACX75ZM	-	ACX75ZMG	99	CP6B	-		170
ACX75ZMG	-		99	CP6C	-		170
ACX76ZB	-		99	CP6D	-		170
ACX79C	-	ACX79CG	99	CP6E	-		170
ACX79CG	-		99	CPC53C	-		278
ACX80A	-	ACX80AA	99	CPC55C	-		278
ACX80AA	-		99	CPE203C	-		248
ACX82A	-		99	CPE203CS	-		248
ACX82AS	-	ACX82A	99	CPE205B	-		248
ACX83A	-	ACX83D	99	CPE205BS	-		248
ACX83AS	-	ACX83D	99	CPE2GA	-		248
ACX83B	-	ACX83D	99	CPE2H	-		248
ACX83D	-		99	DPE1FB	-		248
ACX83DK	-		99	DPE1GB	-		248
ACX83DX	-		99	DPM21A	-		136
AE1132A	-		268	DPM22A	-		136
AF399A	-		281	DPM23A	-		136
AS3000A	-		162	DPM24A	-		136
AS3050A	-		162	DPM28A	-		136
AS3100A	-		162	DPM29A	-		136
AS3150A	-		162	DPM30A	-		136
AS7000A	-		162	DPM30B	-		136

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
DPM31A	-		136	DPM94A	-	DPM94AAX	138
DPM32A	-		136	DPM94AA	-	DPM94AAX	138
DPM33A	-		136	DPM94AAX	-		138
DPM40A	-		136	DPM94B	-		138
DPM40C	-	DPM40CA	136	DPM94C	-		138
DPM40CA	-		136	DPM94EY	-		138
DPM41A	-		136	DPM95A	-	DPM95AAX	138
DPM42A	-		136	DPM95AA	-	DPM95AAX	138
DPM43A	-		136	DPM95AAX	-		138
DPM43C	-	DPM43CA	136	DPM96A	-	DPM96AAX	138
DPM43CA	-		136	DPM96AA	-	DPM96AAX	138
DPM44A	-		136	DPM96AAX	-		138
DPM47A	-		136	DPM96BA	-	DPM96BAX	138
DPM60A	-		137	DPM96BAX	-		138
DPM60AA	-		137	DPM96DA	-	DPM96DAX	138
DPM60EY	-		137	DPM96DAX	-		138
DPM61A	-		137	DPM96EY	-		138
DPM61BA	-		137	DPM97AAX	-		138
DPM61EY	-		137	DPM97DAX	-		138
DPM62A	-		137	DPM97EA	-	DPM97EAX	138
DPM62BA	-		137	DPM97EAX	-		138
DPM63AX	-		137	DPM97FA	-	DPM97FAX	138
DPM64A	-		137	DPM97FAX	-		138
DPM65A	-		137	DPM98A	-		138
DPM66A	-		137	DPM98B	-		138
DPM67A	-		137	DPM99A	-		138
DPM68A	-		137	DR31RAK	-		115
DPM80A	-		137	DR31RCK	-		115
DPM80AX	-		137	DR31RDK	-		115
DPM80B	-		137	DR31REK	-		115
DPM81A	-		137	DR32A	-		115
DPM81AY	-		137	DR32C	-		115
DPM81BA	-		137	DR32D	-		115
DPM81C	-		137	DR33A	-		115
DPM81DA	-		137	DR33B	-		115
DPM82AK	-		137	DR40A	-		115
DPM84A	-		137	DR40AA	-		115
DPM84AX	-		137	DR40B	-		115
DPM84C	-		137	DX10A	-		130
DPM84CX	-		137	DX16A	-	DX19A	131
DPM84CY	-		137	DX16C	-	DX16D	130
DPM85AK	-		137	DX16D	-		130
DPM85AX	-		137	DX16DY	-		130
DPM86A	-	DPM86AA	137	DX18A	-		130
DPM86AA	-		137	DX19A	-		131
DPM90A	-		137	DX19B	-		131
DPM90AA	-		137	DX20A	-		131
DPM90B	-		137	DX25A	-		131
DPM90BK	-		137	DX26A	-		131
DPM90C	-		137	DX26B	-		131
DPM90CK	-		137	DX28A	-		131
DPM90CY	-		137	DX31A	-		131
DPM90CYK	-		137	DX35A	-		131
DPM90D	-		137	DX36B	-		131
DPM90DA	-		137	DX50AX	-		131
DPM90DY	-		137	DX51AX	-		131
DPM90EY	-		137	DX51CX	-		131
DPM91A	-		137	DX52B	-	DX52BY	131
DPM91B	-		137	DX52BX	-	DX52BY	131
DPM92A	-		137	DX52BY	-		131
DPM92AB	-		137	DX53AX	-		131
DPM92B	-		137	DX60A	-		131
DPM92D	-		137	DX61A	-		131
DPM93A	-		137	DX65A	-		131
DPM93D	-		138	DX65B	-		131
DPM93DA	-		138	DX70C	-		131

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
DX71A	-		131	EF161AY	-		203
DX71B	-	DX71BY	131	EF161BY	-		203
DX71BX	-	DX71BY	131	EF161CY	-		203
DX71BY	-		131	EF161DY	-		203
DX75A	-	DX75BA	131	EF161FY	-		203
DX75B	-	DX75BA	131	EF166AAK	-	BZ3374 (I133457)	198
DX75BA	-		131	EF166AK	-	BZ3374 (I133457)	198
DX75BAY	-		131	EF180BY	-		203
DX75BX	-		131	EF180HY	-		203
DX75BXY	-		131	EF1AK	-		240
DX76A	-	DX60A	131	EF201BY	-		203
DX80D	-		131	EF201LA	-		203
DX80E	-		131	EF201LY	-		203
DX81D	-		131	EF206AAK	-	BX3419 (I133782)	197
DX81E	-		131	EF221BY	-		203
DX95A	-	DX95B	131	EF221LY	-		203
DX95B	-		131	EF241BY	-		203
DX95BX	-		131	EF241LY	-		203
DX95BXY	-		131	EF241MY	-		203
DX95BY	-		131	EF241QA	-		203
DX95D	-	DX95F	131	EF246AAK	-	BX3538 (I133485)	198
DX95E	-		131	EF246AK	-	BX3538 (I133485)	198
DX95EX	-		131	EF306AAK	-	BX3607 (I133784)	198
DX95EXY	-		131	EF620A	-		210
DX95EY	-		131	EF620AY	-		210
DX95F	-		131	EF620D	-		210
DX95FX	-		131	EF624A	-		210
DX95FXY	-		131	EF624AK	-		210
DX95FY	-		131	EF624AW	-	EF624A	210
DX9A	-		131	EF624AX	-		210
DX9D	-		131	EF624AY	-		210
E5	-	EX5	160	EF624BY	-		210
EB018972	-		248	EF624D	-		210
EDP13A	-		248	EF624DY	-		210
EDP13B	-		248	EF630A	-		210
EDP21A	-		248	EF8A	-		203
EDP22A	-		248	EF90	-		203
EDP22B	-		248	EF90AB	-		203
EDP22C	-		248	EF90AY	-		203
EDP22D	-		248	EF90C	-	BZ3108 (I60323)	202
EDP25A	-	EDP25AA	248	EF90EX	-		203
EDP25AA	-		248	EF90EY	-		203
EDP25AAX	-		248	EF90Y	-		203
EDP26A	-	EDP26AA	248	EF90YE	-		203
EDP26AA	-		248	EF9A	-		203
EDP26AAX	-		248	EM3A	-		226
EF105AX	-		202	EM3B	-		226
EF105BY	-		202	EX5	-		160
EF105CX	-		202	GCM1B	-		278
EF105FY	-		202	GCM1C	-		278
EF10A	-		202	GCM1E	-		278
EF120AB	-	EF120P	203	I11443	LP1550		96
EF120C	-		203	I11482	LP2950		99
EF120D	-		203	I13716	MB1201	MB1201 (I72776)	132
EF120E	-		203	I13886	LA2100		110
EF120F	-		203	I14911	AE4100		164
EF120FY	-		203	I15544	SZ1300	0482016003000	280
EF120HX	-		203	I15658	AE4102		164
EF120HY	-		203	I16438	EWM2		112
EF120L	-		203	I17154	AE4103		164
EF120N	-		203	I2006	AF1100		110
EF120P	-		203	I22144	DB1104		126
EF120Y	-		203	I22337	BR1300	BR1305 (I84575)	141
EF141BY	-		203	I22772	SZ1100		281
EF141FY	-		203	I25011A	-		160
EF141PYX	-		203	I25351	AE5101		163

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I25351A	AE5101	AE5101 (I25351)	163	I53027A	AE4116	AE4110 (I48227)	118
I25513	LA1100		108	I53417	AE4212		166
I26755	AE1201		170	I53724	DR3102	0481039202000	114
I27644	MB1200	MB1200 (I72775)	132	I53929	DB2113		151
I27712	MB7103		133	I54075	LP1525		96
I27754	AE4200	AE4200 (I68034)	172	I54395	DR3200	0481039221000	115
I27927	DR4301		122	I54743	BZ6507		214
I27929	DR4304	DR4344 (I69860)	122	I55133	DR3201	0481039222000	115
I28323	AE2100		170	I55719	MB4419		132
I28847	DR4102		122	I55724	MB4428		132
I29358	BZ4304		209	I55727	MB4512		132
I30062	WHV-6		170	I55749	BZ6616	BZ6621 (I66033)	214
I30064	WHV-9		171	I55985	BZ6513	BZ6515 (I63476)	214
I30092	-		170	I58101	KU4124		161
I30093	-		170	I58477	BZ3106	EF90AB	203
I33379	DR4305		122	I58483	AE1107		170
I33540	AE7104		253	I58600	AE4130	AE4115 (I47836)	118
I33804	AS6101		162	I58732	BZ3107		202
I34362	ZB1209		254	I58733	BZ3212	EF120E	203
I34514	SZ1602		227	I58889	LP1828		96
I35800	BZ1200		201	I58893	SZ1115		281
I35806	BZ1300		201	I58921	SV1261		259
I35807	BZ1400		201	I58949	SZ1114	SZ1161 (I90948)	281
I35810	BZ1600		201	I59031	KU4127	KU4127 (I76874)	161
I35814	BZ1700		201	I59068	KU4128		161
I35829	BZ1800		201	I59070	KU1303		160
I36924	DR4206		122	I59258	KU1304	KU1304 (II33262)	160
I37739	DRV-1		164	I59259	KU1305	KU1305 (II33263)	160
I3974301	-		281	I59320	KU1306		160
I39961	BZ4307		209	I59321	KU1307		160
I39967	AE7105	AE7104 (I33540)	253	I59353	AS5203		162
I40405	AE4105		164	I59456	RE2102		149
I40719	SZ1605		227	I60224	LP1119		96
I40939	AE5107		163	I60312	ZB4187		101
I40939A	AE5107	AE5107 (I40939)	163	I60323	BZ3108		202
I41276	SZ1200		281	I60324	BZ3213	EF120D	203
I41333	SV1219		259	I60363	AB2761		156
I41424	DR4309		122	I60422	AE5102		163
I42309	LP1154		96	I60496	AE1103		264
I42387	EE4101		112	I60690	KU1200	KU1200 (I88448)	160
I42652	LA2200	0457101001000	110	I60838	BZ3214		202
I42736	BZ4202	AC659AA	209	I60884	AE5107		163
I427361	BZ4202	AC659AA	209	I60966	LP1969		96
I43069	SZ1104		281	I61128	BZ3433		198
I43387	DB2110		153	I61129	BZ3434		198
I43874	ZB3104		255	I61131	BZ3534	BZ3538 (I66006)	199
I4585089024	-		248	I61235	DB1102		126
I46365	RE1105		148	I61236	DB1103		126
I46366	RE2504		148	I61237	DB1105		126
I46381	HB1110	HB1110 (I63724)	138	I61240	DB1113		126
I46599	AB2750		156	I61241	DB1114		126
I47823	SV1211	SV1307 (I87823)	259	I61349	RE2220		148
I47836	AE4115		118	I61423	BZ3324		198
I48016	BZ6405		214	I61707	DB1116		126
I48028	BZ4314		209	I61751	SV1261	SV1261 (I58921)	259
I48198	BZ4204		209	I63105	BZ1400	BZ1400 (I35807)	201
I48227	AE4110		118	I63354	RE2221		148
I48227A	AE4110	AE4110 (I48227)	118	I63411024	-		248
I50138	DR2112		115	I63476	BZ6515		214
I50156	BZ6413		214	I63724	HB1110		138
I50402	DB2111		153	I63733	AE4138	AE4158 (I70615)	118
I50486	VG3160		273	I63748	SZ1117		281
I50858	BZ4316		209	I63753	AE4135	AE4162 (I73329)	118
I50885	-	AE1109 (I67763)	170	I63819	BZ7519		212
I50993	SZ1806		227	I63963	DB1132	AC152AA	125
I53027	AE4116	AE4110 (I48227)	118	I66003	BZ3438		198

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I66004	BZ3439		198	I70676	RE2108		149
I66005	BZ3537		199	I70694	BZ3221		202
I66006	BZ3538		199	I71042	LP1950		96
I66031	BZ6420		214	I71052	DR3223	0481039253000	115
I66032	BZ6517		214	I710521	DR3223	0481039253000	115
I66033	BZ6621		214	I71199	BZ4321		209
I66577	SZ1611		227	I71200	-		252
I66760	AE4146	AE4146 (I85731)	164	I71206	WE2131		252
I66845	BZ3110		202	I71252	HB1132	HB1132 (I86107)	138
I66849	ZB4224		101	I71268	HB1135		138
I66920	AE1111		170	I71315	DR4331		122
I66994	ZB4225		101	I71347	DR3224	0481039257000	115
I67047	LP1157		96	I71352	BZ1304		201
I67226	MB4427		132	I71420	KU4124		161
I67388	BZ3217	EF120P	203	I71421	KU4128		161
I67413	-	AE1109 (I67763)	170	I71427	BZ4600		209
I67661	SV5210		158	I71532	LA4103		108
I67761	BZ3218	EF120D	203	I71613	ZB3108		255
I67763	AE1109		170	I71772	AB2772		156
I677631	AE1109		170	I71779	SZ1208		281
I67812	KU1311	KU1311 (II17355)	160	I7178305	-		127
I67981	SIV-10K		253	I71988	RE2111		149
I68034	AE4200		172	I72507	SV1223	SV1200 (I90706)	259
I68143	BZ3448		198	I72775	MB1200		132
I68144	BZ3449		198	I72776	MB1201		132
I68180	AE4118		118	I72780	MB4514		132
I68201	BZ4320		209	I72791	MB4510		132
I68206	RE1119		148	I72796	DB2123	DB2123 (I86159)	153
I68496	DB2116	DB2116 (I86155)	153	I72870	SV1287	SV1287 (I85247)	259
I68498	DB2114	DB2114 (I86153)	153	I73100	SV3111	SV3111 (I83153)	262
I68649	DR3216	0481039258000	115	I73104	-	SV3115 (I86024)	262
I68675	DR3215	0481039220000	114	I73207	MB1220	MB1220 (I73207A)	132
I68911	MB4434	MB4434 (II32091)	132	I73207A	MB1220		132
I68990	KU4108		161	I73322	BZ3520	BZ3593 (SEB01426)	199
I69281	AE1300		116	I73329	AE4162		118
I69324	SV1280		259	I73335	BZ3222		202
I69395	BZ4402		209	I73358	BR5408		144
I69426	BR6110		142	I73422	SV3361	SV3371 (I90498)	278
I69434A	FB11		131	I73584	LP1992		96
I69478	SZ1119		281	I73591	DB1151	DB1151 (I79644)	126
I69652	BZ4150		209	I73623	SIV100K		253
I69685	WV-10/1		164	I73649	BZ7311		212
I69739	WHEV-1/1		170	I73682	AE1114		170
I69841	DR4120		122	I73832	LP4914	LK4921 (K000233000)	99
I69842	DR4121	DR4125 (I69846)	122	I74054	MB4523		132
I69843	DR4122		122	I74159	BZ3545		199
I69844	DR4123	DR4125 (I69846)	122	I74164	SZ1306		227
I69846	DR4125		122	I74214	BZ7312		212
I69847	DR4126	DR4125 (I69846)	122	I74215	BZ7313		212
I69848	DR4230		122	I74217	BZ7315		212
I69849	DR4231		122	I74252	BZ7316		212
I69850	DR4232		122	I74772	EE4103	EE4115 (I92054)	112
I69851	DR4233		122	I74789	MB4712		133
I69852	DR4234	DR4236 (I69854)	122	I74907	MB4630		132
I69853	DR4235		122	I74908	RE2113		149
I698531	DR4235	DR4235 (I69853)	122	I74963	SZ1130	SZ1161 (I90948)	281
I69854	DR4236		122	I74971	MB4710		133
I69856	DR4340		122	I74972	MB4711		133
I69857	DR4341	DR4341 (II30267)	122	I75053	SZ1750		227
I69858	DR4342		122	I75054	HB1170	HB1170 (I92182)	138
I69860	DR4344		122	I75222	LP1325	LP1325 (II40265F)	96
I69861	DR4345		122	I75226	SZ1704		227
I69864	DR4348		122	I75266	BZ3440		198
I69866	DR4350		122	I75267	BZ3441		198
I69964	DMDV-01		127	I75268	BZ3442		198
I70615	AE4158		118	I75269	BZ3443		198

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I75270	BZ3444		198	I76766	LP4919		100
I75300	AE4168		118	I76767	HB1189	HB1189 (I92190)	138
I75321	BR5325		144	I76792	RE1110		148
I75336	SZ1308		227	I76833	BZ7318	BZ9324 (II37272)	212
I75349	DR4128		122	I76874	KU4127		161
I75353	DR4132		122	I76875	BZ7413	BX9402 (II37276)	211
I75355	DR4239		122	I76885	HB1190	HB1190 (I92191)	138
I75356	DR4352		122	I76897	BZ7319	BZ9324 (II37272)	212
I75358	DR4354		122	I76936	SV3367		278
I75419	BZ3549		210	I76938	RE2223	RE2221 (I63354)	148
I754221400	-		160	I77096	BZ7320	BZ9324 (II37272)	212
I75461	DR3232	0481039258000	115	I77106	LK1300		94
I75505	-	BZ7559 (I87520)	212	I77107	LK1500		94
I75516	LP1316	LK1300 (I77106)	94	I77200	DB2220		153
I75526	DR3402	0481042223000	115	I77201	DB2221		153
I75547	LP1574	LK1503 (I78519)	94	I77202	DB2222		153
I75551	LP1529	LK1500 (I77107)	94	I77243	AE4170	VPS41CY	119
I75566	LP1806		97	I77259	ZB1217		254
I75596	AE4169		118	I77418	AB2778		156
I75598	AE5115		163	I77419	AB2762	0481061007000	155
I75658	LP1974	LK1900 (I81156)	95	I77420	AB2767	0481061020000	155
I75749	SZ1615		227	I77422	AB2777	0481061021000	155
I75785	AE5118	AE5102 (I60422)	163	I77451	AE4171	VPS41AY	119
I75792	BZ3230	EF120C	203	I77568	LP1333		96
I75794	AE1206		170	I77617	AB2794	0481061213000	155
I75798	BZ7236	BY7205 (I87162)	217	I77618	AB2795	0481061214000	155
I75800	AB2764		156	I77633	MB7107		133
I75804	HB1136		138	I77743	BZ3464		198
I75987	LP1946		97	I77744	BZ3555		199
I75988	LP1949		96	I77745	-		147
I76014	SV1288	SV1288 (II17813)	259	I77762	RE1126		148
I76069	LP3947	LK3904 (I78976)	96	I77763	RE2224		148
I76112	HB1154		138	I77888	HB1201	HB1201 (I92194)	138
I76121	HB1154	HB1154 (I76112)	138	I77890	HB1203	HB1203 (I92195)	138
I76128	HB1175	HB1175 (I92185)	138	I77891	HB1204	HB1204 (I92196)	138
I76192	EE4206	EE4206 (II16095)	112	I77897	SZ1817		227
I76202	RE1121		148	I77905	MB1223		132
I76204	RE1115		148	I77997	BF-1/1		130
I76259	BZ3552		210	I78042	BZ3117		202
I76260	BZ3645		210	I78074	ZB3150		250
I76261	BZ3713		210	I78141	LP1585		96
I76269	SV1289	SV1294 (I80091)	259	I78209	DR3200	0481039221000	115
I76270	SV1290	SV1294 (I80091)	259	I78307	BR4411		141
I76271	SV1291	SV1294 (I80091)	259	I78399	BZ6417		214
I76272	SV1292	SV1294 (I80091)	259	I78406	RE2225		148
I76275	SV1295	SV1295 (I85698)	259	I78414	DB2231		153
I76289	AB2780		156	I78418	SV1303	SV1303 (II32763)	259
I76333	BR5331		144	I78491	BZ3332		198
I76334	LP1330	LK1305 (I88783)	94	I78515	LK1302		94
I76340	HB1181	HB1181 (I92188)	138	I78516	LK1303		94
I76341	HB1179	HB1179 (I92186)	138	I78519	LK1503		94
I76342	HB1180	HB1180 (I92187)	138	I78861	DR3238	0481039221000	115
I76370	BR5332		144	I78888	BR5420		144
I76410	MB4631		132	I78964	AE1207		170
I76452	SV5214	SV5214 (I764521)	158	I78976	LK3904		96
I764521	SV5214		158	I79002	EDR1/6		167
I76463	BZ6425		214	I79015	-	ZB4233 (I88477)	101
I76474	BZ3460		198	I79016	ZB4257	ZB4275 (I88057)	101
I76512	BZ7238	BY7206 (I90921)	217	I79023	DR3239	0481039253000	115
I76513	BZ7242	BY7210 (I87164)	217	I79027	AE1117		170
I76624	MB4630	MB4630 (I74907)	132	I79028	AE1118		170
I76627	RE1115	RE1115 (I76204)	148	I79042	SZ1213		281
I76647	SZ1136		281	I79054	SV1304	SV1304 (I85919)	259
I76752	KU1310	KU1310 (II17354)	160	I790551	AB2782	0481061228000	155
I76753	KU1311	KU1311 (II17355)	160	I79056	AB2783	0481061219000	155
I767531	KU1311	KU1311 (II17355)	160	I79165	SZ3500		227

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I79195	LP2982		99	I81820	AB2796	0481061007000	155
I79379	AE4183		118	I81946	LP4921		100
I79444	AE4177		118	I81955	BY3202		202
I79498	HB1354		139	I82038	BY3251	0482023504000	204
I79512	EE4106		112	I82046	BY7151	BY7151 (I86321)	220
I79513	MB1222		132	I82111	MB4436		132
I79644	DB1151		126	I82170	HB1142		138
I79678	SV3360		278	I82171	HB1143		138
I79713	AE1208		170	I82172	HB1144		138
I80004	AB2787	0481061225000	155	I82174	HB1147		138
I80076	SZ1808		227	I82175	HB1176		138
I80086	SV1269		259	I82177	HB1350		139
I80091	SV1294		259	I82242	BZ7543		212
I80093	SV1280		259	I82259	AE5115	AE5115 (I75598)	163
I80095	SV1281		259	I82290	LA4114		108
I80145	BZ7226		218	I82291	LA4115		109
I80147	BZ7222		218	I82293	LA4117		109
I80151	BZ7228		218	I82304	DR3416	0481042208000	115
I80152	BZ7114		218	I82342	DR3500	0481039201000	114
I80153	BZ7112		218	I82352	BY7238	BFM122BK	216
I80157	BZ7113		218	I82387	LA4118		109
I80190	AE4178	0481062301000	117	I82388	LA4119		109
I80214	LP1959	LK1901 (I81089)	95	I82389	LA4120		109
I80239	LP1588		96	I82402	DR4242		122
I80253	BZ7323	BZ9324 (II37272)	212	I82413	BY7209		217
I80255	BZ7334	BZ9324 (II37272)	212	I82414	BY7210	BY7210 (I87164)	217
I80256	BZ7335	BZ9324 (II37272)	212	I82454	BZ6427		214
I80259	BZ7338	BZ9324 (II37272)	212	I82456	SV1310		259
I80260	BZ7324		212	I82501	DR3231	0481039225000	115
I80262	BZ7326	BZ9324 (II37272)	212	I82587	AE4190		118
I80263	BZ7327	BZ9324 (II37272)	212	I82646	EE4107		112
I80264	BZ7328		212	I82697000	RE2117		149
I80265	BZ7422	BX9400 (II37274)	211	I82707	DR3501	0481039205000	114
I80266	BZ7409	BX9400 (II37274)	211	I82708	DR3503	0481039213000	114
I80267	BZ7420	BX9400 (II37274)	211	I82811	DR3508	0481039211000	114
I80268	BZ7539	BX9519 (II37277)	211	I82812	DR3509	0481039259000	115
I80269	BZ7540		212	I82813	DR3510	0481039235000	115
I80270	BZ7414	BX9402 (II37276)	211	I82816	DR3513		116
I80271	BZ7418	BX9402 (II37276)	211	I82818	DR3515	AC135AYZ	115
I80272	BZ7419	BZ7419 (II19279)	212	I82842	HB1154	HB1154 (I76112)	138
I80274	AB2792	0481061228000	155	I82890	HB1157		138
I80275	AB2793	0481061220000	155	I82919	AB2797	0481061220000	155
I80289	AE1121		170	I83008	SV1313	SV1313 (II17817)	259
I80426	BZ7330	BZ9324 (II37272)	212	I83032	LP3842		96
I80509	AE4179		118	I83048	LA4121		109
I80549	LK1305	LK1305 (I88783)	94	I83151	SZ1145	SZ1161 (I90948)	281
I80582	BZ7541		212	I83153	SV3111		262
I80653	BR4253		141	I83280	VG3200	VG3200 (I93581)	273
I80655	BR4263		141	I83313	AE4191		118
I80657	BR4265		141	I83345	VG3204	VG3204 (I93582)	273
I80864	LK1802		95	I83347	AB2798	0481061226000	155
I81040	BR5342		144	I83409	DR3518	0481039214000	114
I81089	LK1901		95	I83425	AE1122		264
I81156	LK1900		95	I83460	LK3805		95
I81192	AE4180		118	I83478	AB2800	0481061215000	155
I81235	BZ7629	BZ9657 (II37281)	212	I83509	BZ7325	BZ9324 (II37272)	212
I81272	AE4185		118	I83510	BZ7331	BZ9324 (II37272)	212
I81325	HB1219	HB1219 (I92198)	138	I83512	BZ7423	BX9402 (II37276)	211
I81510	AE4186		118	I83525	-	II40100F	106
I81522	AE4187	AE4178 (I99811)	118	I835250061	-	II40100F	106
I81523	AE4188	0481062309000	117	I83531	BZ7317	BZ9324 (II37272)	212
I81595	BR4412		141	I83538	BZ7537	BX9519 (II37277)	211
I81616	SZ1144		281	I83539	LK1511		94
I81712	MB4636		132	I83560	BZ7545	BX9519 (II37277)	211
I81796	MB4415		132	I83561	BZ7546	BX9519 (II37277)	211
I81800	RE1129		148	I83640	SV1296		259

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I83641	MB4653		132	I85672	SV1325	SV1325 (II18033)	259
I83642	MB4654		132	I85690	BZ7555	BX9519 (II37277)	211
I83644	DR3519		116	I85698	SV1295		259
I83658	BY3301		202	I85731	AE4146		164
I83692	MB1211		132	I85810	AB2813	0481061021000	155
I83699	SV1260		259	I85830	SIV10L		253
I83747	DB1143		126	I85883	SV1318		259
I83828	SV1279		259	I85884	SV1321	SV1321 (II18034)	259
I83843	LP2983		99	I85893	EE1106		111
I83852	ZB9005	0265152004000	177	I85919	SV1304		259
I83874	MB4518		132	I85943	BZ7637	BZ9657 (II37281)	212
I83985	LP1120		97	I86003	BZ3473		199
I84033	BR4411	BR4411 (I78307)	141	I86007	BY3252		202
I84034	BR4412-G	BR4412 (I81595)	141	I86017	RE1132		148
I84103	MB4676		132	I86022	SV3113		262
I84127	BY7258	BY9258 (II19397)	217	I86023	SV3114		262
I84208	BZ7341	BZ9309 (II18960)	212	I86024	SV3115		262
I84249	BZ7268		218	I86025	SV3118		262
I84253	BR4413		142	I86030	SV1328	SV1328 (II32765)	260
I84269	SZ1223		281	I86107	HB1132		138
I84293	BZ7547	BX9519 (II37277)	211	I86108	HB1133		138
I84385	BZ3252	EF120L	203	I86132	BZ7640	BZ9657 (II37281)	212
I84406	DR5117		253	I86133	BZ7641	BZ9657 (II37281)	212
I84414	DR5118		253	I86141	BZ7141		218
I84433	MB4644	0481064103000	129	I86153	DB2114		153
I84450	BR4414		142	I86154	DB2115		153
I84451	BR4415		142	I86155	DB2116		153
I84567	BZ1614		201	I86156	DB2118		153
I84573	BR1105		141	I86157	DB2121		153
I84575	BR1305		141	I86158	DB2122		153
I84576	BR1306		141	I86159	DB2123		153
I84626	SZ1512		227	I86164	LK1311		94
I84644	HB1241		138	I86170	DB1145		126
I84709	BR5311	BR5522 (II36836)	144	I86233	KU4128	KU4128 (I59068)	161
I84794	KU1310	KU1310 (II17354)	160	I86291	BY3303		202
I84795	KU1311	KU1311 (II17355)	160	I86320	BY7109	BY7114 (I88636)	220
I84808	SV1323	SV1323 (II32764)	259	I86321	BY7151		220
I84828	LA4127	LA4127 (I90186)	109	I86322	BY7152	BY9153 (II18525000)	220
I84866	EE4104		112	I86323	BY7203		220
I84927	DB1159		126	I86324	BY7214	BY9201 (II16576000)	220
I85000	DR3524	AC135HYZ	115	I86378	BY3251	0482023504000	204
I85028	LK3802		95	I86620	DR3528	0481039220000	114
I85043	SV3302		278	I86647	LA6205	LA8229 (II30443)	104
I85051	LK3501	LK3501 (I85051000)	95	I86656	HB1500		139
I85051000	LK3501		95	I86679	LA4130		109
I85083	BZ7624	BZ9657 (II37281)	212	I86775	BZ7593	BZ9559 (II37098)	212
I85094024	-		248	I86776	BZ7594	BZ9559 (II37098)	212
I85127004	-	II40100F	106	I86859	DR3526		116
I85133	LA6200	LA8228 (II30185)	104	I86887	SV1333		260
I85139	LA6700		103	I86888	SV1334		260
I85168	RE1131		148	I86909	LP4812	LP4812 (I86909000)	99
I85193	HB1242		138	I86909000	LP4812		99
I85209	MB4681	0481064110000	129	I87006	DR4357		122
I85247	SV1287		259	I87074	LA6206	LA6228 (I94102)	103
I85280	BR4420		142	I87076	LA6208		103
I85281	BR4421		142	I87101	LA6209	LA8233 (II30447)	105
I85435	BY7225	BFM121CXK	216	I87109	BZ3480		199
I85436	BY7226	BFM121BK	216	I87122004	-		106
I85439	BZ7549	BX9519 (II37277)	211	I87162	BY7205		217
I85443	SV1298	SV1298 (II33045)	259	I87164	BY7210		217
I85444	SV1299	SV1299 (II33046)	259	I87236	SZ1152		281
I85510	AE4170	VPS41CY	119	I87380	SV3370	SV3371 (I90498)	278
I85512	AE4162	AE4162 (I73329)	118	I87432	SV1343		260
I85513	AE4158	AE4158 (I70615)	118	I87433	SV1344		260
I85564	SZ1159		281	I874851	-		131
I85656	LA4129		109	I87496	LA6703		103

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I87500	BY7153	BFM105BK	216	I88682	BF-1/2		130
I87501	LA6210	LA8234 (II30448)	105	I88707	BZ7443	BX9401 (II37275)	211
I87520	BZ7559		212	I88708	BZ7561	BX9520 (II37278)	211
I87538	SV3368		278	I88768	AE4404		118
I87544	LK1314		94	I88770	LK1527		95
I87565	MB4648	MB4648 (I97388)	132	I88772	LA6730	LA6734 (II36933)	103
I87566	BY7248		220	I88782	LK1506		94
I87567	BY7249		220	I88783	LK1305		94
I87605	BZ7442	BZ9412 (II18961)	212	I88787	LP3848	LK3805 (I83460)	95
I87610	AB2814	0481061215000	155	I88827	BZ3253		202
I87611	AB2815		156	I88867	LA6731	LA6735 (I98189)	103
I87671	LK1310		94	I89000	BZ3353		198
I87674	AB2816	0481061230000	156	I89095	LA6705	LA6709 (I98136)	103
I87675	AB2817	0481061232000	156	I89125	DR4245		122
I87676	AB2818	0481061023000	155	I89182	BY3354	EF180HY	203
I87677	AB2819	0481061004000	155	I89242	LA4128		109
I87734	LP4924		100	I89256	LA6250	LA8250 (II31112)	105
I87755	VG3156		273	I89257	LA6251	LA8251 (II31113)	105
I87770	BY7240	BFM121EK	216	I89258	LA6252	LA8225 (II30179)	104
I87811	SV1345	SV1345 (II17814)	260	I89259	LA6253	LA8228 (II30185)	104
I87819	VG8125		274	I89264	BY3106		202
I87823	SV1307		259	I89303	LK1907		95
I87904	LK1808		95	I89326	LA6215	LA8242 (II30650)	105
I87920	LA6211	LA8235 (II30449)	105	I89329	BY7156	BFM105CXK	216
I879201	LA6211	LA8235 (II30449)	105	I89330	BY7157	BFM105DXK	216
I87950	SV1350		260	I89386	MB4656	0481064211000	130
I88006	-		187	I89387	MB4657		132
I88007	-		187,192	I89397	HB1260		138
I88036	LA4131		109	I89398	HB1261		138
I88057	ZB4275		101	I89408000	AE4405		118
I88061	DR3500	0481039201000	114	I89463	SZ1156		281
I88062	DR3501	0481039205000	114	I89614	BZ7347	BZ9324 (II37272)	212
I88063	DR3529	0481039202000	114	I89615	BZ7348	BZ9324 (II37272)	212
I88090	BZ5407		210	I89684	DR5121		253
I88091	BZ5408		210	I89719	SV1352	SV1352 (II18035)	260
I88092	BZ5507		210	I89720	-		163
I88094	VG3208		273	I89741	MB4745		133
I88146	BY3104	EF90EX	203	I89742	MB4747		133
I88182	LA6212	LA8207 (II19204)	104	I89776	LA6217	LA8245 (II30810)	105
I88183	LA6213	LA8257 (II31478)	105	I89848	VG3306	VG3306 (I93584)	274
I88201	BY7237	BY9202 (II17085)	217	I89873	LK3902		96
I88202	BY7258	BY9258 (II19397)	217	I89875	LK3908		96
I88203	BY7308	BY9312 (II19361)	217	I90027	BZ1110		201
I88250	BZ3481		199	I90029	BY3100	EF90EX	203
I88252	BZ3573		199	I90030	BY3151	EF105AX	202
I88261	VG3304	VG3304 (I93583)	274	I90081	LA6003	LA8001 (II19332)	103
I88263	BZ5410		210	I90125	BZ7646	BZ9657 (II37281)	212
I88325	BZ5411		210	I90150	BZ7647	BZ9657 (II37281)	212
I88336	DR3532	0481039241000	115	I90151	BZ7648	BZ9657 (II37281)	212
I88438	DR3533	0481039210000	114	I90156	AE4407		118
I88439	DR3534	0481039216000	114	I90168	AE4252		164
I88443	BZ7599	BZ9559 (II37098)	212	I90186	LA4127		109
I88447	BZ7587	BZ9559 (II37098)	212	I90309	DR3500	0481039201000	114
I88448	KU1200		160	I903091	DR3500	0481039201000	114
I88474	BR4431		142	I90310	DR3501	0481039205000	114
I88477	ZB4233		101	I90311	DR3502	0481039209000	114
I88478	EE4113	EE4115 (I92054)	112	I90312	DR3503	0481039213000	114
I88502	LA6207	LA8231 (II30445)	105	I90313	DR3530	0481039206000	114
I88548	BY3152	EF105AX	202	I90314	DR3531	0481039241000	115
I88579	SV1351		260	I90360	MB4673	0481064210000	130
I88607	BZ7643	BZ9657 (II37281)	212	I90360RP	MB4673	MB4803 (II16537)	133
I88608	BZ7644	BZ9657 (II37281)	212	I90361	MB4674	MB4804 (II16538)	133
I88636	BY7114		220	I90375	LA4116		109
I88637	BY7115		220	I90401	LK1532		95
I88650	MB1224		132	I90439	BY7268		217
I88675	SV1352	SV1352 (II18035)	260	I90452	SV1361		260

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.
I90453	SV1362	SV1362 (II18032)	260
I90474	BY7116		217
I90498	SV3371		278
I90499	LP4813	LP4813 (I90499000)	99
I90499000	LP4813		99
I90499V	LP4813	LP4813 (I90499000)	99
I90543	BY7006		217
I90573	LK3914		96
I90631	SV1307	SV1307 (I87823)	259
I90706	SV1200		259
I90707	SV1201		259
I90708	SV1202		259
I90843	BZ7447	BZ7447 (II14006)	212
I90844	BZ7448	BZ7448 (II14007)	212
I90845	BZ7564	BZ7564 (II14008)	212
I90846	BZ7567	BZ7567 (II14009)	212
I90860	BZ7649	BZ9657 (II37281)	212
I90908	BR4423		142
I90912	BZ7570	BZ9506 (II17479)	212
I90913	BZ7571	BZ9507 (II17480)	212
I90921	BY7206		217
I90948	SZ1161		281
I90962	BZ3588		199
I90967	BZ7572	BX9519 (II37277)	211
I90969	SV3130		262
I90976	BZ7352	BZ9324 (II37272)	212
I90977	BZ7353	BZ9324 (II37272)	212
I92013	LA6221	LA8207 (II19204)	104
I92030	HB1258		138
I92054	EE4115		112
I92062	BZ7453		212
I92081	LA6222		103
I92089	LK3910		96
I92103	SV1329		260
I92104	SV1330		260
I92154	LK1525		95
I92160	BR5607		145
I92161	BR5608		145
I92172	DR3537	0481039201000	114
I92180	HB1167		138
I92181	HB1168		138
I92182	HB1170		138
I92183	HB1172		138
I92185	HB1175		138
I92186	HB1179		138
I92187	HB1180		138
I92188	HB1181		138
I92190	HB1189		138
I92191	HB1190		138
I92194	HB1201		138
I92195	HB1203		138
I92196	HB1204		138
I92198	HB1219		138
I92200	RE2118		150
I92238	MB4658		132
I92252	VG8130		274
I92279	LA4129	LA4129 (I85656)	109
I92291	BY8203		217
I92295	BR4429		142
I92376	BY3211		202
I92427	LA6201	LA8219 (II19483000)	104
I92478	AE4408	AE4427 (II15587000)	118
I92485	DR3541	0481039235000	115
I92489	VG3213		273
I92494	BZ1808		201
I92503	AE4409		118

Part No.	Type No.	Replacement	Page No.
I92518	BY3212		202
I92567	SV1369		260
I92568	SV1370		260
I92570	WE2207		252
I92612	SV1369	SV1369 (I92567)	260
I92613	SV1370	SV1370 (I92568)	260
I92695	BZ7575		212
I92700	SV3157		263
I92715	SV1371		260
I92723	SV3156		263
I92730	BY7138		217
I92737	SV3158		263
I92754	LA4133		109
I92840	LK3508	LK3510 (I94066)	95
I92952	SV1372		260
I92972	LK1534		95
I92977	VG3217	VG3217 (II34816)	274
I92995	SV1374		260
I92999	ZB3163		250
I93014	BZ1615		201
I93024	ZB1110	ZB1110 (I97266)	246
I93070	LA6004	LA8002 (II19333)	103
I93083	VG3218		274
I93139	LA6225	LA8257 (II31478)	105
I93189	MB4661		132
I93218	BY1501		202
I93234	MB4684	MB4806 (II16692)	133
I93253	BY8204		217
I93257	DR3542		116
I93261	AB2834	0481061228000	155
I93262	AB2835	0481061219000	155
I93265	SZ1164		281
I93270	BR9131	BR9152 (II16278)	175
I93289	BZ3357		198
I93297	BR4431-G	BR4431 (I88474)	142
I93304	MB4643		132
I93320	BY3309		202
I93362	AB2840		156
I93403	BY3201		202
I93422	SV1376		260
I93424	SV1380	SV1380 (II36026)	260
I93425	SV1381	SV1381 (II36027)	260
I93497	SV1377		260
I93498	SV1378		260
I93507	SV1377	SV1377 (I93497)	260
I93508	SV1378	SV1378 (I93498)	260
I93510	SV1385	SV1385 (II17815)	260
I93512	SV1384		260
I93517	AE4412	VPS40AAY	119
I93543	AE9126		248
I93544	AE9125	EA1152 (II32611)	248
I93552	AS7000	AS7000A	162
I93553	AS7100		162
I93565	BR5611		145
I93581	VG3200		273
I93582	VG3204		273
I93583	VG3304		274
I93584	VG3306		274
I93585	VG3211		273
I93612	BZ7358	BZ9324 (II37272)	212
I93613	BZ7359	BZ9324 (II37272)	212
I93620	LK3509	LK3509 (I93620000)	95
I93620000	LK3509		95
I93632	LA6005	LA8003 (II19334)	103
I93648	AE4411		118
I93650	BY7221	BFM121B XK	216

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I93667	LA6006	LA8004 (II19335)	103	I97266	ZB1110		246
I93736	LA6226	LA8212 (II19209)	104	I97326	AB2808	0481061005000	155
I93770	LK1539		95	I97363	LP1567		96
I93912	BR5704		145	I97388	MB4648		132
I94027	LA6227	LA8243 (II30651)	105	I97471	BZ3212	EF120E	203
I94037	DR3546		116	I97472	BZ3217	EF120P	203
I94038	DR3547		116	I97474	BZ3218	EF120D	203
I94039	DR3548		116	I97489	DR5124		253
I94062	LK3510	LK3510 (I94066)	95	I97492	LP4814		99
I94064	LK3927		96	I97493	LP4815		99
I94066	LK3510		95	I9770410000	EK3015		185
I94095	EE1100	VA12A	112	I9770412000	EK3015		185
I94102	LA6228		103	I9770415000	EK3015		185
I94103	LA6229	LA8257 (II31478)	105	I977045000	EK3015		185
I94158	DR5122		253	I97709	ES5011	0265050140000	179
I94171	BZ7361	BZ9325 (II37273)	212	I97915	HB1266		138
I94189	SZ1165		281	I97953	DB1147		126
I94299	BR5407		144	I98036	LA6240	LA8247 (II30812)	105
I94301	BR5705		145	I98113	BZ3488		199
I94314000	LK3813		95	I98136	LA6709		103
I94326	SZ1166		281	I98153	VG3224		274
I94369	DR3549	0481042214000	115	I98188	LA6734	LA6734 (II36933)	103
I94616	SV1395		260	I98189	LA6735		103
I94622	SV1399		260	I98210	ES5020	0265050148000	179,188
I94649	LA4134		109	I98211	ES5021	0265050150000	179
I94650	LA4135		109	I98289	SV1410		260
I94658	VG3215	VG3215 (II34814)	273	I98290	SV1411		260
I94754	LA6232	LA8244 (II30652)	105	I98292000	SV1412		260
I94755004	-	II40100F	106	I98348	SV1403		260
I94761	DR3550		116	I98349	SV1404		260
I94812	BR9133	BR9150 (II15492)	175	I98423	BZ3589		199
I94846	WE2135		252	I98433	BY8151	BY9150 (II16486)	217
I94881	DR3551		116	I98435	BY8211	BY9205 (II17468)	217
I94912	BZ7591	BZ9559 (II37098)	212	I98437	BY8212	BY9205 (II17468)	217
I94915	BZ7104		218	I98439	BY8214	BY9207 (II17470)	217
I94916	BZ7105		218	I98498	LK1545		95
I94919	BZ7209		218	I98499	LK3810		95
I94920	BZ7210		218	I98733	BR5605		145
I94924	HB1365		139	I98735	LA6242	LA8220 (II19484)	104
I94956	LA6233		103	I98736	LA6243	LA8221 (II19485)	104
I97001	BZ3358		198	I98736RP	LA6243	LA8221 (II19485)	104
I97002	-	II16774	187,188,192	I98737	LA6244	LA8222 (II19486)	104
I97006	ES1010		174	I98746	HB1267		139
I9702110000	EK3000		186	I98772	BY8251	BY9251 (II17472)	217
I9702112000	EK3000		186	I98774	BY8252	BY9305 (II17474)	217
I9702115000	EK3000		186	I98796	BY3156	EF105BY	202
I970213000	EK3000		186	I98802	BY3404	EF201LY	203
I970215000	EK3000		186	I98804	BY3405	EF201BY	203
I970218000	EK3000		186	I98806	BY3454	EF221LY	203
I97026	ES5004	0486000092000	179	I98810	BY3505	EF241LY	203
I97041	BZ7581	BZ7581 (II34867)	212	I98812	BY3506	EF241BY	203
I97048	BZ7582	BZ7582 (II34868)	212	I98815	BY3255	EF141BY	203
I97142	VG3221		274	I98817	BZ3491		199
I97253	ES5010	ES5010 (II16761)	180	I98818	BZ3490		199
I9725512000	EK3010		185	I98819	BZ3590		199
I9725515000	EK3010		185	I98820	BZ3591		199
I972553000	EK3010		185	I98822	BY9350		218
I972554000	EK3010		185	I98823	BY9400		218
I972555000	EK3010		185	I98824	BY9450		218
I972556000	EK3010		185	I98825	BY9500		218
I972559000	EK3010		185	I98892	ZB9022	EK3030 (II18181)	187
I97256	ES1006		174	I98919	LA6248	LA8206 (II19375)	104
I9725710000	EK3020		181	I98981	BZ7536		212
I9725812000	EK3025		181	I99614	LA6205	LA8229 (II30443)	104
I9725815000	EK3025		181	I99615	LA6207	LA8231 (II30445)	105
I972586000	EK3025		181	I99630	SV1416		260

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
I99631	SV1417		260	II14553	BZ9302	BZ9324 (II37272)	212
I99633	SV1418		260	II14554	BZ9303	BZ9324 (II37272)	212
I99660	LA2103		110	II14555	BZ9304	BZ9324 (II37272)	212
I99719	MB4690	MB4849 (II36174000)	133	II14557	BZ9401	BX9400 (II37274)	211
I99719000	MB4690	MB4849 (II36174000)	133	II14558	BZ9402	BX9400 (II37274)	211
I99723	LA6247		103	II14559	BZ9403	BX9400 (II37274)	211
I99776	BY8253	BY9306 (II17475)	217	II14560	BZ9425	BZ9425 (II14560000)	212
I99797	-		122	II14560000	BZ9425		212
I99810	AE4162		118	II14561	BZ9426	BX9402 (II37276)	211
I99811	AE4178		118	II14562	BZ9427	BX9402 (II37276)	211
I99812	DR5125		253	II14564	BZ9500	BX9519 (II37277)	211
I99940	LK1549		95	II14565	BZ9501	BX9519 (II37277)	211
I99961	AE2109		170	II14566	BZ9501	BX9519 (II37277)	211
IB20AA	-		251	II14570	LK1813	LK1813 (II18355)	95
IB20BA	-		251	II14588	BR5615		145
IB20CA	-		251	II14589	BR5616		145
IB20DA	-		251	II14590	BR5617		145
IB20EA	-		251	II14591	BR4439		142
IB20FA	-		251	II14635	BZ7364	BZ9325 (II37273)	212
IB20HA	-		251	II14636	BZ7365	BZ9325 (II37273)	212
IB20LA	-		251	II14781	LK3935	LK3935 (II19494)	96
IB20MA	-		251	II14785	LP4921	LP4921 (II1946)	100
IB20QA	-		251	II14786	LK3930	LK3930 (II18606)	96
IB6A	-		251	II14840	EZ1010		187
IB8B	-		251	II14841	EZ1000		187
IB8D	-		251	II14870	LK1814	LK1814 (II18356)	95
IB9AY	-		251	II14888	SV1419	SV1419 (II17812)	260
IB9BY	-		251	II14891	DB2135		151
IB9CY	-		251	II14892	BR4442		142
IB9DY	-		251	II14893	BR4443		142
IB9EY	-		251	II14894	BR4444		142
IB9FY	-		251	II14895	BR4445		142
IB9HY	-		251	II14936	WE2137		252
IB9MY	-		251	II15080	AE4431		118
IB9QY	-		251	II15224	BZ9408	BX9400 (II37274)	211
II14006	BZ7447		212	II15229000	BS3350		206
II14007	BZ7448		212	II15332	AB2846		156
II14008	BZ7564		212	II15334	AB2851	AB2851 (II37151)	156
II14009	BZ7567		212	II15372	BR4441		142
II14111	DB2237		153	II15406	DR3559		116
II14119	MB4694	MB4694 (II36045)	132	II15492	BR9150		175
II14130	DR3510	0481039235000	115	II15571	BY9300		217
II1415610000	EK3011		185	II15587	AE4427	AE4427 (II15587000)	118
II1415612000	EK3011		185	II15587000	AE4427		118
II141563000	EK3011		185	II15588	AE4428	AE4428 (II15588000)	118
II141564000	EK3011		185	II15588000	AE4428		118
II141566000	EK3011		185	II15591	AE4183		118
II141568000	EK3011		185	II1563910000	EK3001		186
II14193	VG3228		274	II1563912000	EK3001		186
II14194	VG3229		274	II156393000	EK3001		186
II14195	VG3361		274	II156395000	EK3001		186
II14240	BR9200	BR9232 (II32614)	176,192	II156396000	EK3001		186
II14295	LA6010	LA8006 (II19337)	103	II156398000	EK3001		186
II14296	AE4423		118	II15687	BR9151		175
II14297	VG3231	VG3227 (II34815)	274	II15698	LP4930	LP4974 (K000236000)	100
II14304	BX7503	BX9520 (II37278)	211	II15698000	LP4930	LP4974 (K000236000)	100
II14305	BX7504	BX9520 (II37278)	211	II15724	DB2240		153
II14308	BY3357	EF180BY	203	II15729	SV1421		260
II14309	BZ7460	BX9401 (II37275)	211	II15730	SV1422		260
II14310	BZ7461	BX9401 (II37275)	211	II15741	MB4753		133
II14339	-		187	II15992	LP4934	LP4934 (II15992000)	100
II14340	ES1200		174	II15992000	LP4934		100
II14385F	LP3940		97	II15993	LP4825	LP4825 (II15993000)	99
II14535000	BS3300		205	II15993000	LP4825		99
II14540	BS3450		206	II15998	LK3941		96
II14552	BZ9301	BZ9324 (II37272)	212	II15998RP	LK3941	LK3941 (II15998)	96

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II16068	AE4257		172	II17355	KU1311		160
II16095	EE4206		112	II17366	LA9000		105
II16096	EE4106		112	II17369	LA9001		105
II16098	AE4434		118	II17393	LK1560		95
II16149	LA6710	LA6710 (II36935000)	103	II17395000	LP4957		100
II16159	BY9351		218	II17414	BZ9428	BX9402 (II37276)	211
II16160	BY9401		218	II17436	BZ9505	BX9519 (II37277)	211
II16189	SV1425		260	II17464	VG3261	VG3261 (II31733)	274
II16190	SV1426		260	II17468	BY9205		217
II16191	SV1427	SV1427 (II17810)	260	II17469	BY9206	BY9205 (II17468)	217
II16194	SV1430	SV1430 (II17811)	260	II17470	BY9207		217
II16242	BY8218	BY9217 (II31649)	217	II17471	BY9250		217
II16243	LP4936		100	II17472	BY9251		217
II16278	BR9152		175	II17473	BY9304		217
II16361	MB1226		132	II17474	BY9305		217
II16417	LP4937		100	II17475	BY9306		217
II16465	MB4800		133	II17479	BZ9506		212
II16466	MB4801	MB4811 (II18787)	133	II17480	BZ9507		212
II16468	RE1141		148	II17564	BY9208		217
II16472	MB4754		133	II17649	BR4453		142
II164721	MB4754	MB4754 (II16472)	133	II17755	BY9451		218
II16486	BY9150		217	II17756	BY9501		218
II16537	MB4803		133	II17767	VG3262		274
II16538	MB4804		133	II17770	VG3285		274
II16539	MB4805		133	II17771	VG3364		274
II16546	AE4500	AE4510 (II37680)	119	II17772	VG3215	VG3215 (II34814)	273
II16567	BY9402		218	II17776	BR9154		175
II16575000	BY9200		220	II17787	ZB4504	ZB4511 (II35530)	107
II16576000	BY9201		220	II17788	ZB4505	ZB4512 (II35531)	107
II16692	MB4806		133	II17791	AE4443		118
II16757	ES5004	0486000092000	179	II17793	-	II40100F	106
II16761	ES5010		180	II17793004	-	II40100F	106
II16762	ES5011		180	II17810	SV1427		260
II16763	ES5020	0265050148000	179,188	II17811	SV1430		260
II16764	ES5021	0265050150000	179	II17812	SV1419		260
II16764004	ES5021	0265050150000	179	II17813	SV1288		259
II16773	ES1040		174	II17814	SV1345		260
II16774	-		187,188,192	II17815	SV1385		260
II16783	BR4451	BR4466 (II36827)	142	II17817	SV1313		259
II16852	BZ9406	BX9401 (II37275)	211	II17924	BZ9626	BZ9657 (II37281)	212
II16854	BZ9404	BX9400 (II37274)	211	II17925	BZ9550	BZ9559 (II37098)	212
II16854000	BZ9404		212	II17926	BZ9551	BZ9559 (II37098)	212
II16855	BZ9405	BX9400 (II37274)	211	II18006	BY9100		217
II16855000	BZ9405		212	II18032	SV1362		260
II17085	BY9202		217	II18033	SV1325		259
II17086	BY9303		217	II18033B	SV1325	SV1325 (II18033)	259
II17087	BZ9305	BZ9325 (II37273)	212	II18034	SV1321		259
II17088	BZ9306	BZ9325 (II37273)	212	II18035	SV1352		260
II17089	BZ9307	BZ9325 (II37273)	212	II18036	BR5619		145
II17090	BZ9407	BX9401 (II37275)	211	II18037	RE2117	RE2117 (I82697000)	149
II17091	BZ9409	BX9401 (II37275)	211	II18037000	RE2117		150
II17092	BZ9502	BX9520 (II37278)	211	II18067	DR4363		122
II17093	BZ9503	BX9520 (II37278)	211	II18068	AE4257		172
II17094	BZ9504	BX9520 (II37278)	211	II18069	BR4454		142
II17095	BZ9600	BZ9614 (II37280)	212	II18167	AE4446		118
II17096	BZ9601	BZ9614 (II37280)	212	II18172	AE4422		118
II17142	ES1043		174	II18181	EK3030		187
II17163	VG3227	VG3227 (II34815)	274	II18206	BZ9627	BZ9657 (II37281)	212
II17166	VG3234		274	II18209	BS3502		207
II17189	AE4437		118	II18210	BS3503		207
II17247	BZ9625	BZ9657 (II37281)	212	II18222	BY9502		218
II17252	LK3947		96	II18224	BS9398		224
II17257	LK1559		95	II18230	BZ9429	BX9402 (II37276)	211
II17292	AB2822		156	II18355	LK1813		95
II17353	BR5712		145	II18356	LK1814		95
II17354	KU1310		160	II18409	BZ9430	BX9402 (II37276)	211

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II18410	BZ9431	BX9402 (II37276)	211	II19252	-		246
II18411	BZ9432	BX9402 (II37276)	211	II19253	-		246
II18490	AE4447		118	II19254	-		246
II18503	SV1323	SV1323 (II32764)	259	II19260	BZ9312	BZ9325 (II37273)	212
II18515	BZ9435	BX9402 (II37276)	211	II19261	BZ9414	BX9401 (II37275)	211
II18516	BZ9436	BX9402 (II37276)	211	II19262	BZ9415	BX9401 (II37275)	211
II18523000	BY9103		220	II19263	BZ9416	BX9401 (II37275)	211
II18524000	BY9104		220	II19264	BZ9512	BX9520 (II37278)	211
II18525000	BY9153		220	II19265	BZ9513	BX9520 (II37278)	211
II18526000	BY9154		220	II19266	BZ9514	BX9520 (II37278)	211
II18528	BZ9308	BZ9324 (II37272)	212	II19267	BZ9602	BZ9614 (II37280)	212
II18596	BR9161	BR9161 (II32618)	175	II19268	BZ9603	BZ9614 (II37280)	212
II18602	LK3954		96	II19269	BZ9604	BZ9614 (II37280)	212
II18606	LK3930		96	II19270	BZ9515	BX9519 (II37277)	211
II18691	BY9504		218	II19279	BZ7419		212
II18692	BY9452		218	II19325	LA6269	LA8200 (II19211)	104
II18693	BY9453		218	II19326	LA6272	LA8201 (II19212)	104
II18694	BY3456		202	II19327	LA6265	LA8202 (II19213)	104
II18754	AE4448		119	II19328	LA6266	LA8203 (II19214)	104
II18755	LA6711	LA6711 (II36936000)	103	II19329	LA6267	LA8204 (II19215)	104
II18766	BY1502		202	II19330	LA6268	LA8205 (II19216)	104
II18784	BR4455		142	II19332	LA8001		103
II18785	BR4456		142	II19333	LA8002		103
II18786	BR4457		142	II19334	LA8003		103
II18787	MB4811		133	II19335	LA8004		103
II18788	MB4812		133	II19337	LA8006		103
II18842	BZ9628	BZ9657 (II37281)	212	II19338	LA8007		103
II18844	BY9308		220	II19342	BZ9417	BX9400 (II37274)	211
II18845	BY9309		221	II19342000	BZ9417		212
II18846	BZ9552	BZ9559 (II37098)	212	II19361	BY9312		217
II18849	BZ9509	BX9519 (II37277)	211	II19362	LA8008		103
II18850000	BS3451		207	II19364	LA8010		103
II18886	BS3452		207	II19365	LA8011	LA8011 (II37926)	103
II18887	BY9000		220	II19366	LA8012		103
II18888	BY9001		220	II19367	LA8013		103
II18950	BS3505		207	II19369	LA8015		103
II18951	BS3506		207	II19370	LA8016	LA8016 (II37927)	103
II18960	BZ9309		212	II19371	LA8017	LA8040 (II34976)	103
II18961	BZ9412		212	II19375	LA8206		104
II18971	BZ9553		212	II19397	BY9258		217
II18972	BZ9554		212	II19416	BR5628		145
II19020	BZ9510	BX9519 (II37277)	211	II19418	BR5630		145
II19030	BZ9310	BZ9325 (II37273)	212	II19423	BR5604		145
II19031	BZ9311	BZ9325 (II37273)	212	II19424	BR5605		145
II19065	LK3955	LK3955 (II19495)	96	II19425	SV1395		260
II19085	SV1435		260	II19428	AB2852	AB2852 (II37152)	156
II19086	SV1436		260	II19456	BY9213		217
II19087	SV1437		260	II19461000	BS9526		225
II19088	MB4813	MB4813 (II36364)	133	II19469	BY9314		218
II19089	MB4814	MB4814 (II36365)	133	II19473	BZ9527	BX9521 (II37279)	211
II19090	MB4815		133	II19483000	LA8219		104
II19193	LP1158		97	II19484	LA8220		104
II19201	LA6024	LA8015 (II19369)	103	II19485	LA8221		104
II19204	LA8207		104	II19486	LA8222		104
II19205	LA8208		104	II19494	LK3935		96
II19206	LA8209		104	II19495	LK3955		96
II19207	LA8210		104	II19497	LK4910	LK4931 (II40277F)	99
II19208	LA8211		104	II19607	VG3227	VG3227 (II34815)	274
II19209	LA8212		104	II19612	VG3238		274
II19211	LA8200		104	II19623	-	II40100F	106
II19212	LA8201		104	II19623004	-	II40100F	106
II19213	LA8202		104	II19744	BZ3258		198
II19214	LA8203		104	II19747	BZ9528	BX9521 (II37279)	211
II19215	LA8204		104	II19748	BZ9630	BZ9657 (II37281)	212
II19216	LA8205		104	II19749	BZ9631	BZ9657 (II37281)	212
II19219	LA8201	LA8201 (II19212)	104	II19750	BY9260		217

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II19757	BZ9516	BX9520 (II37278)	211	II30677	-	Z002017	245
II19759	BZ9517	BX9519 (II37277)	211	II306770061	-		244
II19761	DR3570		116	II30808	LA6736		103
II19763	LA8025		103	II30809	LA8030		103
II19770004	-	II40100F	106	II30810	LA8245		105
II19802	AE4262		172	II30812	LA8247		105
II19803	AE4261		172	II30848	MB4820	MB4820 (II36300)	133
II30021	BZ9632	BZ9657 (II37281)	212	II30892	LK3959		96
II30079	BZ9529	BX9521 (II37279)	211	II30895	LP4934		100
II30089	BY3220		202	II30897	LK4911	LK4931 (II40277F)	99
II30091	BY9215		217	II30898	LK3960		96
II30127	BZ1616		201	II30899	LP4960		100
II30128	SZ1180		281	II30900	LP4961		100
II30178	LA8223		104	II30901	LP4842		99
II30179	LA8225		104	II31019	-	II38335F	244
II30180	LA8226		104	II31090	BZ9547	BX9519 (II37277)	211
II30181	LA8227		104	II31091	BZ9644	BZ9657 (II37281)	212
II30182	LA8224		104	II31097	BS9426	BS9426 (II31097000)	224
II30184	LA8700		105	II31097000	BS9426		224
II30185	LA8228		104	II31098000	BS3404		206
II30210	BZ9531	BX9521 (II37279)	211	II31099	BS3453		207
II30211	BZ9532	BX9521 (II37279)	211	II31100	BS3551		207
II30212	BZ9418	BX9400 (II37274)	211	II31101	BS3601		207
II30223	ES1080		174	II31102	BZ9548	BX9519 (II37277)	211
II30267	DR4341		122	II31104	BZ9645	BZ9657 (II37281)	212
II30294	BZ9605	BZ9614 (II37280)	212	II31112	LA8250		105
II30301	BX7517	BX9519 (II37277)	211	II31113	LA8251		105
II30393	BY9263	BY9263 (II30393000)	220	II31118	LA8252		105
II30393000	BY9263		220	II31119	LA8253		105
II304180061	-		244	II31163	AE4505		119
II304190061	-		244	II31226	BS9451	BS9451 (II31226000)	224
II30443	LA8229		104	II31226000	BS9451		224
II30444	LA8230		104	II31227	BS9397	BS9397 (II31227000)	224
II30445	LA8231		105	II31227000	BS9397		224
II30446	LA8232		105	II31230	BZ3368		198
II30447	LA8233		105	II31232	BX3528		198
II30448	LA8234		105	II31400	AB3405		156
II30449	LA8235		105	II31402	BR5633		145
II30450	LA8236		105	II31406	BX3602		198
II30451	LA8237		105	II31407	BS9404	BX9400 (II37274)	211
II30455	LA8027		103	II31407000	BS9404	BX9400 (II37274)	211
II30458	LA8028		103	II31408	BS9503		225
II30475	BZ9523		212	II31409	BX9500	BX9519 (II37277)	211
II30477	BS9450		224	II31410	BX9501	BX9519 (II37277)	211
II30483	BZ7367	BZ9318 (II33453)	212	II31469	BX7520	BX9519 (II37277)	211
II30484	BZ7368	BZ9319 (II33454)	212	II31471	DR3575		116
II30522	BR9231		176,192	II31477	LA8256		105
II30525	SV1399	SV1399 (I94622)	260	II31478	LA8257		105
II30525000	SV1399		260	II31480	AE4452	AE4452 (II31480000)	119
II30527	AE1136		170	II31480000	AE4452		119
II30530	SV1440		260	II31481	LA8259		105
II30531	SV1441		261	II31482	-	II40100F	106
II30532	SV3133	SV3133 (II36043)	262	II31482004	-	II40100F	106
II30614	BS3301		205	II31549	BY9107		217
II30616	BS3402		206	II31550	BY9157		217
II30617	BS3403		206	II31551	BY9216		217
II30618000	BS3509		207	II31556	BZ3595		199
II30619	BS9304	BS9304 (II30619000)	223	II31649	BY9217		217
II30619000	BS9304		223	II31651	BS3517		207
II30625	BZ7327	BZ9324 (II37272)	212	II31652	BS3518		207
II30650	LA8242		105	II31654	BY9219		217
II30651	LA8243		105	II31663	BS9349	BS9349 (II31663000)	224
II30652	LA8244		105	II31663000	BS9349		224
II30657	LA8239		105	II31730	LP4955		100
II30676	-	Z002016	245	II31733	VG3261		274
II306760061	-		244	II31739	LA9007		105

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II31782	BS3251		205	II32687000	LP4964		100
II31783	BS9297	BS9297 (II31783000)	223	II32688	LP4965		100
II31783000	BS9297		223	II32690	LK1564		95
II31786	BZ9549	BX9520 (II37278)	211	II32697	BS9505		225
II31789	BZ9440	BX9402 (II37276)	211	II32700000	BS9308		223
II31796	BY3257		202	II32701000	BS9411		224
II31907	BY8221		217	II32702000	BS9412		224
II31918	BX3413		197	II32703	BS9502		225
II31919	BX3531		198	II32710	BS3415		206
II31920	BX3532		198	II32715	BX9503	BX9519 (II37277)	211
II31949	LK3963		96	II32718	BX9504	BX9521 (II37279)	211
II31955	LP4962		100	II32723	BS3526		207
II31994	BY9109		217	II32734	BZ9444	BX9402 (II37276)	211
II31995	BY9158		217	II32735	BX9506	BX9521 (II37279)	211
II31996	BY9220		217	II32736	BX9507	BX9521 (II37279)	211
II31997	BZ9317	BZ9324 (II37272)	212	II32737	BX9508	BX9521 (II37279)	211
II32005	BZ9524		212	II32738	BZ9445	BX9402 (II37276)	211
II32006	BZ9424		212	II32739	BZ9446	BX9402 (II37276)	211
II32009	BS9506		225	II32763	SV1303		259
II32091	MB4434		132	II32764	SV1323		259
II32122	BY9458		218	II32765	SV1328		260
II32124	BZ9442	BX9400 (II37274)	211	II32766	BR5643		145
II32126	BX9502	BX9519 (II37277)	211	II32788	SV1442		261
II32127	BZ9443	BX9402 (II37276)	211	II32789	SV1443		261
II32128	BZ9646	BZ9657 (II37281)	212	II32792	BR5645		145
II32135	BY9408		218	II32842	LP4844		99
II32158	BY3313		202	II32920	SZ1190		281
II32159	BS9395		224	II32921	SZ1317		227
II32160	BS9396		224	II32963	BS3250		205
II32161000	BS9507		225	II33044	AB2854		156
II32164	BS3520		207	II33045	SV1298		259
II32165	BS3521		207	II33046	SV1299		259
II32167	BS3252		205	II33050	BS3255		205
II32169	BS3410		206	II33062	BS9514		225
II32170	BS3411		206	II33163	LK3965		96
II32171	BS3412		206	II33164	LP4967	LP4967 (II33164000)	100
II32172	BS3522		207	II33164000	LP4967		100
II32173	BS9508		225	II33198	BZ3370		198
II32174	BS9509		225	II33199	BZ3371		198
II32175000	BS9311		223	II33261	AE2110		170
II32202	-		246	II33262	KU1304		160
II32223	LK3966		96	II33263	KU1305		160
II32581	LA9002		105	II33424	LA8267		105
II32582	ZB4506		107	II33441	BX3534		198
II32584	LA8035		103	II33442	BX3535		198
II32589	LA8036		103	II33444	BX3604		198
II32592	BS3401		206	II33445	BX3605		198
II32593	BS3524		207	II33453	BZ9318		212
II32595	BS3409		206	II33454	BZ9319		212
II32597	BS3514		207	II33455	BZ3372		198
II32598	BS3515		207	II33456	BZ3373		198
II32599	BS3516		207	II33457	BZ3374		198
II32600	BS9305		223	II33458	BX3416		197
II32601000	BS9306		223	II33465	-	BX3538 (II33485)	198
II32602000	BS9407		224	II33479	BX3417		197
II32604000	BS9405		224	II33480	BX3418		197
II32605000	BS9406		224	II33484	BX3537		198
II32606	BS9409		224	II33485	BX3538		198
II32607	BS9410		224	II33486	BX3539		198
II32608	BS9500		225	II33487	BX3606		198
II32609000	BS9504		225	II33489	BX3608		198
II32611	EA1152		248	II33490	BZ9647	BZ9657 (II37281)	212
II32612	BR9156		175	II33509	LK3970		96
II32614	BR9232		176,192	II33510	LK3971		96
II32618	BR9161		175	II33514000	LP4968		100
II32686	LP4963		100	II33545	BZ9648	BZ9657 (II37281)	212

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II33546	BZ9649	BZ9657 (II37281)	212	II34393	BS9428		224
II33547	BZ9650	BZ9657 (II37281)	212	II34405	LP4970		100
II33578	LA8037		103	II34439	SV1445		261
II33581	ES1210		174,192	II34600	-	II376380061	244
II33582	ES1215		174,192	II34670	BS3456		207
II3358712000	EK3040		184	II34671	BS3457		207
II335874000	EK3040		184	II34699R	-	BZ3377 (II37741)	198
II335875000	EK3040		184	II34747	RE2230		148
II335878000	EK3040		182,192	II34754	MB4761		133
II3358810000	EK3027		183	II34814	VG3215		273
II3358812000	EK3027		183	II34815	VG3227		274
II3358813000	EK3027		183	II34816	VG3217		274
II3358814000	EK3027		183	II34817	VG3231	VG3227 (II34815)	274
II3358815000	EK3027		183	II34841	LP4830	LP4830 (SEB01781)	99
II335888000	EK3027		181,192	II34850	BS3604		207
II335889000	EK3027		183	II34851	BS3605		207
II33647	BS9198		223	II34855	BX3541		198
II33648	BS9296		223	II34867	BZ7581		212
II33675000	BZ9447		212	II34868	BZ7582		212
II33679	BS9510		225	II34870	BS9522		225
II33767	BS9320		223	II34910	SV1447		261
II33770	BS9321		223	II34976	LA8040		103
II33781	BZ3374		198	II34977	LA8041	LA8041 (II37928)	103
II33782	BX3419		197	II34979	-	II40100F	106
II33783	BX3538		198	II34982	LA9003		105
II33784	BX3607		198	II34988	DR3572	0481039215000	114
II33856	AE4611		119	II35106	BY9223		220
II33885	BS9197		223	II35107	BY9224		220
II33886	BS9295		223	II35112	BS9523		225
II33895	BS3309		205	II35117	BY9321		221
II33896	BS3352		206	II35372	MB4825		133
II33897	BS3420		206	II35375	MB4828		133
II33898	BS3455		207	II3541510000	EK3022		183
II33899	BS3527		207	II3541512000	EK3022		183
II33903	BS3528		207	II354156000	EK3022		183
II33920	MB4760		133	II354158000	EK3022		181,192
II33921	BR5648		145	II354159000	EK3022		183
II33922	BR4458		142	II3541610000	EK3003		188
II33926	LA6275	LA8267 (II33424)	105	II3541612000	EK3003		188
II33929	LA8263		105	II3541615000	EK3003		188
II33932	LA8039	LA8041 (II37928)	103	II354162000	EK3003		188
II33985	-	II37257	244	II354163000	EK3003		188
II33992	BS9322		223	II354163500	EK3003		188
II33993	BS9353		224	II354164000	EK3003		188
II33994	BS9420		224	II354165000	EK3003		188
II33995	BS9455		224	II354166000	EK3003		189
II33996	BS9517		225	II354167000	EK3003		189
II33998	BS9323		223	II354168000	EK3003		187,192
II33999	BS9354		224	II354169000	EK3003		189
II34000	BS9421		224	II3541710000	EK3013		187
II34001	BS9456		224	II3541712000	EK3013		187
II34002	BS9518		225	II3541715000	EK3013		187
II34004	BZ9558		212	II354172000	EK3013		187
II34017	BY9505		218	II354173000	EK3013		187
II34021	BS3602		207	II354174000	EK3013		187
II34029	BX9509		211	II35417500	EK3013		187
II34069	LK3826		95	II354175000	EK3013		187
II34184	BS9355		224	II354177000	EK3013		187
II34185	BS9424		224	II354178000	EK3013		187
II34186	BS9457		224	II354183000	EK3050		185
II34187	BS9519		225	II354184000	EK3050		185
II34198	BS9527		225	II354185000	EK3050		185
II34211	BS3603		207	II354188000	EK3050		183,194
II34388	BS9520		225	II35419	ES1216		174,192
II34389	BS9458		224	II354343000	EZ1020		183,194
II34392	BS9427		224	II35462	BR9157		175

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II35522	LA8269		105	II36098	-		119
II35523	LA8270		105	II36099	SV1463	SV1466 (II36115)	261
II35525	AE4459		119	II36100	SV1463	SV1466 (II36115)	261
II35526	LA8044		103	II36101	SV1461		261
II35530	ZB4511		107	II36107	SV3164		262
II35531	ZB4512		107	II36108	SV1318		259
II35535	-		244	II36109	AE4247	AE4247 (II36127)	172
II35564	LP4850	LP4850 (II35564000)	100	II36109M2	AE4247	AE4247 (II36127)	172
II35564000	LP4850		100	II36114	SV1465		261
II35570	LK4912	LK4931 (II40277F)	99	II36115	SV1466		261
II35695	SZ1318		227	II36117	SV1467		261
II35696	VG3264		274	II36118	SV1468		261
II35699	BS9524		225	II36120	MB4847	MB4849 (II36174000)	133
II35719	BS9528		225	II36120000	MB4847	MB4849 (II36174000)	133
II35736	BS9356	BS9356 (II35736000)	224	II36121	SV1470		261
II35736000	BS9356		224	II36122	SV1471	SV1307 (I87823)	259
II35869	BY3259		202	II36123	SV1472		261
II36005	AE4500	AE4510 (II37680)	119	II36125	AE4246		172
II36006	ZB4513	ZB4564 (II39866F)	107	II36126	AE4246		172
II36007	LA9004		105	II36127	AE4247		172
II36008	AE4506	AE4506 (II38797F)	119	II36128	AE4230		172
II36011	AE4603	AE4603 (II36011000)	119	II36129	AE4247		172
II36011000	AE4603		119	II36131	AE4247		172
II36012	AE4604	AE4604 (II36012000)	119	II36132	AE4230	AE4230 (II36128)	172
II36012000	AE4604		119	II36133	AE4232		172
II36015	RE2130		150	II36134	AE4233		172
II36016	RE2130	RE2130 (II36015)	150	II36141	SV1461		261
II36017	RE2131		150	II36142	SV1463	SV1466 (II36115)	261
II36018	RE2131	RE2131 (II36017)	150	II36145	SV3200		262
II36019	DB2141		153	II36146	DR4135		122
II36020	DB2141	DB2141 (II36019)	153	II36150	-		119
II36021	DB2142		153	II36151	SV3230		262
II36022	DB2142	DB2142 (II36021)	153	II36152	SV3260		262
II36023	DB2143		153	II36154	AE4617		119
II36024	DB2143	DB2143 (II36023)	153	II36159	AE4216		172
II36026	SV1380		260	II36160	AE4217		172
II36027	SV1381		260	II36161	AE4231		172
II36030	SV1461	SV1465 (II36114)	261	II36169	SV1481		261
II36042	SV1307	SV1455 (II36056)	261	II36171	SV1482		261
II36043	SV3133		262	II36174	MB4849	MB4849 (II36174000)	133
II36045	MB4694		132	II36174000	MB4849		133
II36055	AE4264		172	II36178	KU1400	KU1400 (K000067)	160
II36056	SV1455		261	II36179	KU1401	KU1401 (K000174)	160
II36058	MB4762		133	II36180	KU1410	KU1410 (K000068)	160
II36060	MB4763		133	II36181	KU1411		161
II36061	AE4265		172	II36185	SV3204		262
II36062	AE4266		172	II36198	SV3263	SV3273 (II36227)	262
II36065	DB2244		153	II36205	SV3293		262
II36066	DB2245		153	II36212	-		261
II36067	DB2246		153	II36219	DB2116		153
II36068	DB2247		153	II36224	AE1141		268
II36069	SV3161		262	II36225	SV3240		262
II36074	MB4819		133	II36226	SV3241		262
II36075	SV3162		262	II36227	SV3273		262
II36076	SV3163		262	II36230	AE4311	AE4311 (K000896)	172
II36077	DB2121		153	II36239	LA9005		105
II36078	RE1115		148	II36241	SV3242		262
II36079	-		147	II36243	SV3243		262
II36081	DB2137		153	II36257	LA8272		105
II36084	DR3579	0481042209000	115	II36258	LA8273		105
II36085	RE1147		148	II36293	MB4833		133
II36087	EE4207		112	II36295	MB4835		133
II36088	SV1460		261	II36296	MB4836		133
II36090	-		131	II36297	MB4837		133
II36092	MB4765		133	II36298	MB4838		133
II36096	MB4846		133	II36299	MB4821		133

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II36300	MB4820		133	II367566000	EK3130		187
II36301	MB4841		133	II36778	BS3354		206
II36302	MB4815		133	II36779	BS3423		206
II36338	BS9196		223	II36780	BS3458		207
II36339	BX7521		215	II36781	BS3532		207
II36364	MB4813		133	II36790	BZ9656	BZ9657 (II37281)	212
II36365	MB4814		133	II36797	-		246
II36373	VG3265		274	II36818	BR5530		145
II36375	SZ1817		227	II36826	BR4465		142
II36377	VG3267		274	II36827	BR4466		142
II36378	SZ1319		227	II36828	BR4467		142
II36379	VG3269		274	II36829	BR4468		142
II36381	EZ1022		187,188,194	II36836	BR5522		144
II36382	-	II36744	192	II36839	BR5655		145
II36383	ES2001		192,194	II36862	BZ9323	BZ9324 (II37272)	212
II36384	ES2002		192,194	II36863	BX9517	BX9519 (II37277)	211
II36385	ES2003		192,194	II36864	BX9518	BX9519 (II37277)	211
II36386	-		192	II36925	LK3980		96
II3638710000	EK3028		192	II36933	LA6734		103
II36388500	EK3029		192	II36935	LA6710	LA6710 (II36935000)	103
II36390	-		194	II36935000	LA6710		103
II36391	EZ1025		189	II36936	LA6711	LA6711 (II36936000)	103
II36394	ES5060		180	II36936000	LA6711		103
II36395	ES5061		180	II36940	LA8281		105
II363978000	EK3023		192	II36944	BX7523		215
II3640412000	EK3024		181	II36945	BX7524		215
II3640415000	EK3024		181	II36946	BX7525		215
II3640423000	EK3024		181	II36947	BX7526		215
II36413	ES2005		177,188	II36948	BX7406		215
II3641712000	EK3028		181	II36950	BX7408		215
II3641714000	EK3028		181	II36951	BX7409		215
II36418500	EK3029		181	II36962	BS9433		224
II36419	ES2050		195	II36967	BS3201		205
II36423	LK3830		95	II36968	BS3257		205
II36424	LK4913	LK4931 (II40277F)	99	II36969	BS3313		205
II36424M1	LK4913	LK4931 (II40277F)	99	II36972	BS9434	BS9434 (II36972F)	224
II36426	LK3978	LP3982 (II40278F)	97	II36972F	BS9434		224
II36529	BX9517	BX9519 (II37277)	211	II36973	BX7527		215
II36537	BY9225		217	II36985	BZ9451	BX9401 (II37275)	211
II36650	AE4605		119	II36986	BZ9452	BX9401 (II37275)	211
II36653	LA8275		105	II37032	DR3576		116
II36716	BY9269		217	II37032VO	DR3576	DR3576 (II37032)	116
II36717	BY9270		217	II37038	LA9008		105
II36724	BY9322		221	II37082	ES5024		180
II36725	BY9323	BY9323 (II36725000)	221	II37084	BR9162		175
II36725000	BY9323		221	II37086	BR9180		176
II36726	BY9409		221	II37090	BR9233		176,188
II36727	BY9410		221	II37091	BR9234		176,188
II36728	BY9461		221	II37097	BX9522	BX9519 (II37277)	211
II36729	BY9462		221	II37098	BZ9559		212
II367381	EK3101		183	II37099	-		240
II367382	EK3101		183	II37110	BS3314		205
II367391	EK3100		183	II37124	BS9531		225
II367393	EK3100		183	II37127	BS3538		207
II367395	EK3100		183	II37133	BS3536		207
II367396	EK3100		183	II37134	BS3537		207
II367397	EK3100		183	II37138	BS9390		224
II3674112000	EK3110		187	II37139	BS9391		224
II3674115000	EK3110		187	II37140000	BS3315		205
II367419000	EK3110		187	II37141	BX7528		211
II36744	-		192	II37143	BS3606		207
II36753	-		183	II37144	BS3607		207
II367541	EK3120		185	II37145	BY9506		218
II367563000	EK3130		187	II37151	AB2851		156
II367564000	EK3130		187	II37152	AB2852		156
II367565000	EK3130		187	II37154	BR5656		145

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II37156	-		142	II37667	ZB4525		107
II37166	BR5657		145	II37668	ZB4526		107
II37168	BR5534		145	II37668M2	ZB4526	ZB4526 (II37668)	107
II37181	MB9000		195	II37669	ZB4527		107
II371910061	-		244	II37672	ZB4530	ZB4587 (K001447)	107
II37212	LK3982	LK3982 (K000274000)	96	II37672M3	ZB4530	ZB4587 (K001447)	107
II37214	LP4974	LP4974 (K000236000)	100	II37677	LA8102	LA8125 (II40555F)	104
II37214000	LP4974	LP4974 (K000236000)	100	II37679	AE4502		119
II37215	LP4975	LP4975 (II37365)	100	II37679M4	-	AE4502 (II37679)	119
II37220	LK3832		95	II37680	AE4510		119
II37241	-	II37784	244	II37715	LA8286	LA8286 (II39752F)	105
II37257	-		244	II37730	BY3406	EF241BY	203
II37264	BS9326		223	II37731	BY3509		202
II37265	BS9327		223	II37734	BX9525	BX9521 (II37279)	211
II37266	BS9437		224	II37735	BX9526	BX9521 (II37279)	211
II37267	BS9438		224	II37741	BZ3377		198
II37272	BZ9324		212	II37747000	BS9536		225
II37273	BZ9325		212	II37757	LK3986		96
II37274	BX9400		211	II377830061	-		244
II37275	BX9401		211	II37784	-		244
II37276	BX9402		211	II37861	BS3202		205
II37277	BX9519		211	II37863	BS3318		205
II37278	BX9520		211	II37864	BS3355		206
II37279	BX9521		211	II37865	BS3424		206
II37280	BZ9614		212	II37866	BS9190		223
II37281	BZ9657		212	II37867	BS9189		223
II37282	BS9534		225	II37870	BS9387		224
II37312	BY9411		218	II37871	BS9386		224
II37313	BY9412		218	II37883	BS9332		223
II37315	BS3316		205	II37885	BS9357		224
II37316	BS3317		205	II37886	BS9358		224
II37317	BS9330		223	II37887	BS9445		224
II37318	BS9331		223	II37888	BS9446		224
II37342	BY9463		218	II37906	BS9461		224
II37365	LP4975		100	II37909	BS9448		224
II37369	LP4977		100	II37921	LA8049	LA8059 (II38788F)	104
II37371	-	SK2973/1	208	II37922	AE4525		119
II37372	-	SK2973/2	208	II37924	LA8050		103
II37373	-	SK2973/3	208	II37926	LA8011		103
II37374	-	SK2973/4	208	II37927	LA8016		103
II37375	-	SK2973/5	208	II37928	LA8041		103
II37402	LA8100	LA8124 (II40554F)	104	II37930	LA8053		103
II37412	LA8047		103	II37933	VG3268		274
II37415	-		244	II37940	VG3365		274
II37437	LP4981		100	II37949	SZ1182		281
II37460	AE4609		119	II37950	VG3275		274
II37461	AE4608		119	II37951004	ZB9032		246
II37462	AE4610		119	II37962	LP3966		97
II37463	AE4527		119	II37983	-	II379830061	244
II37463M2	AE4527	AE4527 (II37463)	119	II379830061	-		244
II37464	AE4528		119	II37986	-		244
II37464M2	AE4528	AE4528 (II37464)	119	II37987	-		244
II37468	BS9535		225	II379871	-	II37987	244
II37508	BX3550		198	II37988	-		244
II37520	BS9193		223	II38005F	ZB4545		107
II37627M3	ZB4530	ZB4587 (K001447)	107	II38049F	BS9188		223
II37638	-	II376380061	244	II38060F	BZ9326	BZ9324 (II37272)	212
II376380061	-		244	II38061F	BZ9327	BZ9324 (II37272)	212
II37651	-		244	II38064F	BX9403	BX9400 (II37274)	211
II376530061	-		244	II38065F	BX9404	BX9400 (II37274)	211
II37654	-		244	II38068F	BX9529	BX9519 (II37277)	211
II37662	LA8283		105	II38069F	BX9530	BX9519 (II37277)	211
II37663	LA8284		105	II38074F	BX9533		211
II37664	ZB4522	ZB4586 (K001446)	107	II38097F	BY9113		217
II37666	ZB4524		107	II38100F	BS9384	BS9397 (II31227000)	224
II37666M2	ZB4524	ZB4524 (II37666)	107	II38101F	BS9385	BS9397 (II31227000)	224

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II38102F	BS7301	BS7304 (II38524F000)	222	II38524F000	BS7304		222
II38105F	BS3320		205	II38525F	BS7351	BS7350 (II38120F000)	222
II38107F	BS3430		206	II38527F	BS3358		206
II38110F	BS9335	BS9304 (II30619000)	223	II38528F	BS3436		206
II38111F	BS3321		206	II38529F	BS3462		207
II38116F	BS9462		225	II38530F	BS3547		207
II38118F	BS7302	BS7304 (II38524F000)	222	II38531F	BS9286	BS9297 (II31783000)	223
II38119F	BS7303	BS7304 (II38524F000)	222	II38532F	BS9346	BS9349 (II31663000)	224
II38120F	BS7350	BS7350 (II38120F000)	222	II38533F	BS9479	BX9400 (II37274)	211
II38120F000	BS7350		222	II38534F	BS8504		222
II38122F	BS9383	BS9377 (II38496F000)	224	II38547F	BS8506		223
II38124F	BS9471	BX9400 (II37274)	211	II38551F	BS9480		225
II38131F	BZ9330	BZ9324 (II37272)	212	II38552F	BS9482		225
II38132F	BS9463		225	II38556F	BS3327		206
II38133F	BZ9331		212	II38564F	BS7305	BS7304 (II38524F000)	222
II38302F	LA8104		104	II38565F	BS7352	BS7350 (II38120F000)	222
II38303F	LA8105		104	II38568F	BS9482		225
II38304F	LA8106		104	II38569F	BS9483		225
II38305F	LA8107		104	II38570F	BS9484		225
II38308F	LA9010		105	II38574F	BS3437		206
II38309F	LA9011		105	II38577F	BS9285	BS9297 (II31783000)	223
II38310F	ZB4534		107	II38578F	BS9376	BS9397 (II31227000)	224
II38311F	ZB4535		107	II38579F	BS9345	BS9349 (II31663000)	224
II38313F	ZB4537	ZB4588 (K001448)	107	II38580F	BS9339	BS9304 (II30619000)	223
II38315F	ZB4539	ZB4589 (K001449)	107	II38581F	BS9485	BX9400 (II37274)	211
II38317F	ZB4541	ZB4590 (K001450)	107	II38589F	BS3331		206
II38319F	ZB4543	ZB4591 (K001453)	107	II38591F	BS3440		206
II38335F	-		244	II38595F	BS9375	BS9377 (II38496F000)	224
II38393F	BS9474		225	II38599F	BS9486	BX9400 (II37274)	211
II38394F	BS9475		225	II38610F	LA8108	LA8126 (II40556F)	104
II38398F	BY3315		202	II38613F	LA8111		104
II38400F	BS3204		205	II38615F	LA8113	LA8128 (II40558F)	104
II38402F	BS3322		206	II38617F	LA8115	LA8129 (II40559F)	104
II38403F	BS3357		206	II38619F	ZB4544		107
II38404F	BS3433		206	II38620F	LA8116		104
II38407F	BS9382		224	II38628F	-		244
II38408F	BS9476		225	II38659F	BR9163		176
II38411F	BS3323		206	II38660F	BR9164		176
II38412F	BS3324		206	II38665F	BR9182		176
II38413F	BS3434		206	II38672F	LA8117		104
II38414F	BS3435		206	II38677F	AE4503		119
II38421F	BX9534		211	II38683F	LK3845		95
II38428F	BS9287		223	II38744F	ZB4546	ZB4593 (K001455)	107
II38446F	BX9416	BX9402 (II37276)	211	II38745F	AE4516		119
II38452F	BX9535	BX9519 (II37277)	211	II38749F	AE4529		119
II38453F	BX9536	BX9519 (II37277)	211	II38776F	LP4991		100
II38455F	BS3263		205	II38777F	LP4992		100
II38462F	BS3325		206	II38779F	LP4993	LK4918 (K000230000)	99
II38465F	BS9379	BS9397 (II31227000)	224	II38784F	-		116
II38466F	BS3326		206	II38788F	LA8059		104
II38467F	BS9338	BS9304 (II30619000)	223	II38789F004	-		106
II38470F000	BS8500		222	II38797F	AE4506		119
II38471F000	BS8501		222	II38798F	LA8060		104
II38472F	BS2500		205	II38799F	ZB4548		107
II38473F	BS2501		205	II38801F	AE4612		119
II38474F	BS2502		205	II38802F	AE4613		119
II38475F	BS2503		205	II38821F	-		147
II38486F	BS8502		222	II38879F	-		254
II38487F	BS8503		222	II38904F	BY9227		217
II38488F	BS9092		223	II38905F	BY9228		217
II38489F	BS9093		223	II38906F	BY9114		217
II38496F	BS9377	BS9377 (II38496F000)	224	II38907F	BY9115		217
II38496F000	BS9377		224	II38922F	BS8516		223
II38497F	BS9378	BS9377 (II38496F000)	224	II38924F	BS3361		206
II38522F	BS9478		225	II38931F	BY9414		218
II38524F	BS7304	BS7304 (II38524F000)	222	II38936F	BS7306	BS7309 (II39355F000)	222

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II38937F	BS7307	BS7309 (II39355F000)	222	II39290F	-		245
II39010F	AE4526		119	II39323F	BS3442		206
II39018F	ZB4550	ZB4592 (K001454)	107	II39324F	BS3443		206
II39023F	-		244	II39347F	BZ9624		212
II39024F	-		244	II39355F	BS7309	BS7309 (II39355F000)	222
II39025F	-		244	II39355F000	BS7309		222
II39026F	-		244	II39356F	BS7310	BS7309 (II39355F000)	222
II39027F	-		244	II39358F	BY9272		217
II39028F	-		244	II39372F	BY9329		218
II39029F	-		244	II39374F	BS3336		206
II39050F	RE3312		148	II39375F	BS3337		206
II39052F	ZB4553	ZB4594 (K001456)	107	II39452F	-		182
II39054F	LA8061		104	II39521F	LK3517		95
II39077F	LK4918	LK4918 (K000230000)	99	II39522F	LP3975		97
II39078F	LK4919	LK4919 (K000231000)	99	II39523F	LK4927		99
II39080F	LP4921	LK4921 (K000233000)	99	II39530F	LK1568		95
II39081F	-		245	II39541F	-		245
II39082F	-		245	II39575F	BS9488		225
II39083F	-		245	II39576F	BS9489		225
II39084F	-		245	II39578F	BS3468		207
II39085F	-		245	II39579F	BS3469		207
II39087F	-		245	II39595F	BY9230		217
II39088F	-		245	II39596F	BY3226		202
II39089F	-		245	II39600F	BS9359		224
II39090F	-		245	II39601F	BS9360		224
II39091F	-		245	II39602F	BS3363		206
II39092F	-		245	II39603F	BS3364		206
II39093F	-		245	II39606F	BY9274		217
II39094F	-		245	II39614F	BS8519		223
II39095F	-		245	II39666F	BY3408		202
II39096F	-		245	II39668F	BS9491		225
II39098F	-		245	II39669F	BS9492		225
II39112F	-	II39541F	245	II39687F	BS8302		222
II39121F	ZB4556	ZB4595 (K001457)	107	II39689F	BX9425		211
II39122F	ZB4557	ZB4596 (K001458)	107	II39690F	BX9426		211
II39123F	ZB4558	ZB4597 (K001459)	107	II39693F	BS3338		206
II39140F	AE4615		119	II39737F004	-	II40100F	106
II39151F	LK1566		95	II39740F	LA8288		105
II39152F	LP1550		97	II39748F	LA6273		103
II39184F	BX9539	BX9520 (II37278)	211	II39749F	-	II40100F	106
II39191F	BS3205		205	II39749F004	-	II40100F	106
II39193F	BS3207		205	II39751F	LA8271		105
II39196F	BS3269		205	II39752F	LA8286		105
II39199F	BS3362		206	II39775F	AE4447		119
II39201F	BS3441		206	II39782	ES2053		195
II39203F	BS3467		207	II397871	EK3122		185
II39205F	BS2504		205	II397872	EK3122		185
II39210F	BS9090		223	II397881	EK3123		185
II39212F	BS9374		224	II397882	EK3123		185
II39213F	BS9373		224	II397883	EK3123		185
II39214F	BS3270		205	II3979310000	EK3115		187
II39215F	BS3271		205	II397938000	EK3115		187
II39218F	BS3335		206	II397941	EK3124		185
II39219F	BS8517	BS8517 (II39219F000)	223	II397942	EK3124		185
II39219F000	BS8517		223	II397951	EK3125		185
II39220F	BS8518	BS8517 (II39219F000)	223	II397952	EK3125		185
II39222F	BS9487		225	II39798	ES2050		195
II39229F	BY9328		218	II39808F	EZ1034		183
II39280F	-		245	II39809F	EZ1031		187
II39281F	-		207	II39810F	EZ1035		187
II39284F	-		245	II39812F	EZ1032		183
II39285F	-		245	II39813F	EZ1033	EZ1033 (Z005464)	183
II39286F	-		245	II39814F1	EK3127		185
II39287F	-		245	II39866F	ZB4564		107
II39288F	-		245	II39867F	LA6277		103
II39289F	-		245	II39878F004	-	II40100F	106

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
II39884F	LA8701		105	II40558F	LA8128		104
II39906F	BZ3259		198	II40559F	LA8129		104
II39907F	BZ3260	BZ3259 (II39906F)	198	II40662F	-		183
II39908F	BZ3261		198	II40663F	-		183
II39918F	-		207	II40664F	-		183
II39925F	BS8304		222	II40665F	-		183
II39926F	BS8305		222	II40864F	BR9159		175
II39927F	BS3340		206	II40868F	BR9235		176
II39928F	BS3341		206	INT1B	-		252
II39929F	BS8520		223	INT2A	-		252
II39930F	BS8521		223	INT30A	-		252
II39933F	BS7312		222	INT36A	-		252
II39934F	BS7313		222	INT36B	-		252
II39935F	BS9088		223	INT46A	-		252
II39936F	BS9089		223	INT46B	-		252
II39940F	BY9508		221	INT46D	-		252
II39958F	BS8522		223	INT46E	-		252
II39964F	-		207	INT46F	-		252
II39965F	-		207	INT46G	-		252
II39967F	BS8309		222	INT51A	-		252
II39968F	BS8310		222	K000001	SV1395		260
II39969F	BS8307		222	K000014	MB4850		133
II39970F	BS8308		222	K000055	AE4463		119
II40096F	VG3276		274	K000067	KU1400		160
II40100F	-		106	K000068	KU1410		160
II40133F	LA8062		104	K000069	SV1468		261
II40246F	AE4620		119	K000073	SV1412		260
II40259F	AE4621		119	K000079	KU1412		161
II40265F	LP1325		96	K000172	KU1413		161
II40277F	LK4931		99	K000173	KU1411		161
II40278F	LP3982		97	K000174	KU1401		160
II40280F	LP1577		96	K000229	LP4985	LP4985 (K000229000)	100
II40284F	ZB4289		101	K000229000	LP4985		100
II40307F	-		207	K000230	LK4918	LK4918 (K000230000)	99
II40321F	BZ9566		212	K000230000	LK4918		99
II40323F	BS9499		225	K000231	LK4919	LK4919 (K000231000)	99
II40324F	BZ3263		198	K000231000	LK4919		99
II40349F	BS3273		205	K000232	LK4920		99
II40381F	VG3282		274	K000233	LK4921	LK4921 (K000233000)	99
II40391F2	EK3108		185	K000233000	LK4921		99
II40488F	BY9416		221	K000235	LP4992		100
II40489F	BY9417		221	K000236	LP4974	LP4974 (K000236000)	100
II40491F	BX9425		211	K000236000	LP4974		100
II40493F	BS3342		206	K000237	LP4960	LP4960 (II30899)	100
II40494F	BS8307		222	K000237000	LP4960		100
II40495F	BS8308		222	K000238	MB4851		133
II40496F	BS8309		222	K000264	SV1490		261
II40497F	BS8310		222	K000274	LK3982	LK3982 (K000274000)	96
II40500F	BS8450		222	K000274000	LK3982		96
II40501F	BS8451		222	K000275	LK3986		96
II40542F	ZB4566	ZB4586 (K001446)	107	K000332	-		245
II40543F	ZB4567	ZB4587 (K001447)	107	K000336	LA8289		105
II40544F	ZB4568	ZB4588 (K001448)	107	K000367	SV1485		261
II40545F	ZB4569	ZB4589 (K001449)	107	K000390	LA8130		104
II40546F	ZB4570	ZB4590 (K001450)	107	K000391	LA8131		104
II40547F	ZB4571	ZB4591 (K001453)	107	K000392	LA8132		104
II40548F	ZB4572	ZB4593 (K001455)	107	K000394	ZB4578		107
II40549F	ZB4573	ZB4592 (K001454)	107	K000395	ZB4579		107
II40550F	ZB4574	ZB4594 (K001456)	107	K000396	ZB4580		107
II40551F	ZB4575	ZB4595 (K001457)	107	K000411	VG3283		274
II40552F	ZB4576	ZB4596 (K001458)	107	K000469	ZB9036		246
II40553F	ZB4577	ZB4597 (K001459)	107	K000479	LA8008		103
II40554F	LA8124		104	K000500	AE4623		119
II40555F	LA8125		104	K000501	BS2511		205
II40556F	LA8126		104	K000511	VG3284		274
II40557F	LA8127		104	K000516	AE4625		119

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
K000575	-		208	K001349	AE5131		163
K000630	DR4256		122	K001368	BZ2030		211
K000644	DR4378		122	K001369	BZ1624		211
K000645	DR4379		122	K001436	BS9083		223
K000661	SV1491		261	K001437	BS9084		223
K000699	BS8452		222	K001446	ZB4586		107
K000700	BS8453		222	K001447	ZB4587		107
K000701	AE7110		253	K001448	ZB4588		107
K000725	BZ3377		198	K001449	ZB4589		107
K000740	LK3947		96	K001450	ZB4590		107
K000741	LK3959		96	K001453	ZB4591		107
K000745	EE4107		112	K001454	ZB4592		107
K000754	LA8063		104	K001455	ZB4593		107
K000755	LA8064		104	K001456	ZB4594		107
K000758	-		245	K001457	ZB4595		107
K000797	BS8529		223	K001458	ZB4596		107
K000798	BS8530		223	K001459	ZB4597		107
K000810	-		245	K001483	BS9267		223
K000811	-		245	K001603	BS2516		205
K000812	-		245	K001604	BS2517		205
K000813	-		245	K001605	BS9366		224
K000814	-		245	K001606	BS9367		224
K000821	LP4857		100	K001611	LP3993		97
K000839	LK4935		99	K001633	BS2518		205
K000853	LK3839		95	K001664	AE4311		172
K000854	LK3859		96	K001728	LK3867		96
K000861	LK3846		95	K001760	BS8424		222
K000896	AE4311		172	K001761	BS8425		222
K000952	KU1400		160	K001885	-		261
K000953	KU1401		160	K001887	BS9271		223
K000954	KU1410		160	K001893	-		154
K000955	KU1411		161	K001898	BS8322		222
K000956	KU1412		161	K001899	BS8323		222
K000957	KU1413		161	K001902	BS9269		223
K000978	BS9265		223	K001903	BS9270		223
K000979	BS9266		223	K001970	BS8426		222
K001001	AE4534		119	K001971	BS8427		222
K001027	BS2514		205	K001976	BS9283		223
K001028	BS2515		205	K002020	SV3293		262
K001029	BS9086		223	K002045000	LP4957		100
K001030	BS9087		223	K002046	LP4964		100
K001031	BS8413		222	K002047	LP4965		100
K001032	BS8414		222	K002113	BS3569		207
K001034	SV1486		261	K002135	LA8068		104
K001035	SV1487		261	K002161	LK1571		95
K001043	DB2116		153	K002162	BS3570		207
K001044	DB2122		153	K002163	BY9512		218
K001045	DB2118		153	K002171	BY3510		202
K001047	DB2116		153	K002647	SV1485		261
K001056	LA8065		104	K002759	SB7405RC		242
K001057	BY9276		217	K002760	SB7415RC		242
K001059	BY9331		218	K002783	SB7408RC		242
K001071	VG3285		274	K002784	SB7418RC		242
K001095	LP4858		100	K002785	SB7409RC		242
K001181	BS8320		222	K002786	SB7419RC		242
K001182	BS8321		222	K002789	SB7421RC		242
K001197	LA8066		104	K002790	SB7431RC		242
K001207	LK4935		99	K002793	SB7420RC		242
K001214	BS3471		207	K002794	SB7430RC		242
K001215	BS3472		207	K002874	SB6400RC		242
K001238	BS8415		222	K002875	SB6410RC		242
K001255	BZ9661		212	K002878	SB6404RC		242
K001256	BZ9568		212	K002879	SB6414RC		242
K001267000	LK4918		99	K002915	SB6403RC		242
K001268000	LK4921		99	K002916	SB6413RC		242
K001319	-		266	K002919	SB6408RC		242

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
K002920	SB6418RC		242	K2B0504XU	-		213
K002923	SB6401RC		242	K2B0506XU	-		213
K002924	SB6411RC		242	K2B0512XU	-		213
K002962	SB7450RC		242	K2B0513XU	-		213
K002963	SB7460RC		242	K2B0514XU	-		213
K002964	SB7451RC		242	K2B0518	-		213
K002965	SB7461RC		242	K2B0520XU	-		213
K002966	SB7452RC		242	K2B0521XU	-		213
K002967	SB7462RC		242	K2B0522XU	-		213
K002968	SB7453RC		242	K2B0525XU	-	K2B0525XUA	213
K002969	SB7463RC		242	K2B0525XUA	-		213
K003192	SB7455RC		242	K2B0526XU	-	K2B0526XUA	213
K003193	SB7465RC		242	K2B0526XUA	-		213
K003386	SB7423RC		242	K2B0527XU	-	K2B0527XUA	213
K003387	SB7433RC		242	K2B0527XUA	-		213
K003779	SN6573RC		242	K2B0528XU	-	K2B0528XUA	213
K003780	SN6563RC		242	K2B0528XUA	-		213
K003781	SN7185RC		243	K2B0535XU	-	K2B0535XUA	213
K003782	SN7195RC		243	K2B0535XUA	-		213
K003783	SN7186RC		243	K2B0542XU	-	K2B0542XUA	213
K003784	SN7196RC		243	K2B0542XUA	-		213
K003785	SN7187RC		243	K2B0543XU	-	K2B0543XUA	213
K003786	SN7197RC		243	K2B0543XUA	-		213
K003787	SN7188RC		243	K2B0550XU	-		213
K003788	SN7198RC		243	K2B1000	-	K2B0528XUA	213
K003789	SN6554RC		242	K2B1001	-	K2B0543XUA	213
K003790	SN6564RC		242	K2B1008	-	K2B0521XU	213
K003791	SN6557RC		242	K2B1018	-	K2B0528XUA	213
K003792	SN6567RC		243	K2B1019	-	K2B0528XUA	213
K003793	SN6558RC		242	K2B1022	-	K2B0543XUA	213
K003794	SN6568RC		243	K2B1023	-	K2B0543XUA	213
K003795	SN7189RC		243	K2B1024	-	K2B0543XUA	213
K003796	SN7199RC		243	K2B1025	-	K2B0543XUA	213
K003797	SN7200RC		243	K2B1030	-	K2B0506XU	213
K003798	SN7210RC		243	K2B1031	-	K2B0506XU	213
K003799	SN7201RC		243	K2B1034	-	K2B0514XU	213
K003800	SN7211RC		243	K2B1036	-	K2B0514XU	213
K003801	SN7202RC		243	K2B1037	-	K2B0504XU	213
K003802	SN7212RC		243	K2B1045	-	K2B0522XU	213
K003803	SN7203RC		243	K2B1060	-	K2B0542XUA	213
K003804	SN7213RC		243	K2B1093	-	K2B0503XU	213
K003805	SN7204RC		243	K2B1094	-	K2B0512XU	213
K003806	SN7214RC		243	K2B1095	-	K2B0512XU	213
K003807	SN7205RC		243	K2B1096	-	K2B0520XU	213
K003808	SN7215RC		243	K2B1097	-	K2B0520XU	213
K003809	SN7206RC		243	K2B1101XU	-		213
K003810	SN7216RC		243	K2B1125XU	-		213
K003811	SN7207RC		243	K2B1144	-	K2B0521XU	213
K003812	SN7217RC		243	K2B1145	-	K2B0521XU	213
K003813	SN7208RC		243	K2B1154XU	-		213
K003814	SN7218RC		243	K2B1159	-	K2B0513XU	213
K003815	SN7209RC		243	K2B1173	-	K2B0513XU	213
K003816	SN7219RC		243	K2B1178	-	K2B0506XU	213
K003825	SN6555RC		242	K2B1187	-	K2B0521XU	213
K003826	SN6565RC		242	K2B1188	-	K2B0521XU	213
K004570	SN5005RC		242	K2B1193	-	K2B0522XU	213
K004571	SN5015RC		242	K2B1194	-	K2B0501XU	212
K004572	SN5006RC		242	K2B1195	-	K2B0501XU	212
K004573	SN5016RC		242	K2B1204	-	K2B0543XUA	213
K004578	SN7241RC		243	K2B1205	-	K2B0543XUA	213
K004579	SN7251RC		243	K2B1206	-	K2B0543XUA	213
K004580	SN7242RC		243	K2B1207	-	K2B0528XUA	213
K004581	SN7252RC		243	K2B1208	-	K2B0528XUA	213
K2B0501XU	-		212	K2B1211	-	K2B0513XU	213
K2B0502XU	-		213	K2B1212	-	K2B0528XUA	213
K2B0503XU	-		213	K2B1213	-	K2B0528XUA	213

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
K2B1219	-	K2B0506XU	213	KB1180	-		230
K2B1220	-	K2B0506XU	213	KB1185	-		230
K2B1222XU	-		213	KB1190	-		230
K2B1224	-	K2B0506XU	213	KB1205	-		230
K2C0501XU	-		213	KB1210	-		230
K2C0527XU	-	K2C0527XUA	213	KB1215	-		230
K2C0527XUA	-		213	KB1220	-		230
K2C0611XU	-		213	KB1225	-		230
K2C0612	-		213	KB1230	-		230
K2C2002XU	-		213	KB2000	-		230
K2C2004XU	-		213	KB2005	-		230
K2C2020XUB	-		213	KB2010	-		230
K2C2023XUB	-		213	KB2015	-		230
K2D0706	-		213	KB2020	-		230
K2D0710	-		213	KB2025	-		230
K2D0714	-		213	KB2030	-		230
K2D0722XU	-		213	KB2035	-		230
K2D3012	-	K2D0710	213	KB2040	-		230
K2D3013	-	K2D0710	213	KB2045	-		230
K2D3014	-	K2D0710	213	KB2050	-		230
K2E4000XU	-		218	KB2055	-		230
K2E4001XU	-		218	KB2060	-		230
K2E4002XU	-		218	KB2065	-		230
K2E4004XU	-		218	KB2070	-		230
K2E4007XU	-		218	KB2075	-		230
K2E4035XU	-		218	KB2080	-		230
K2E4036XU	-		218	KB2085	-		230
K2G0822XU	-		213	KB2090	-		230
KA626783	-	628450AM	273	KB2095	-		230
KA628259	-	628259AM	273	KB2100	-		230
KA628276	-	628276AM	273	KB2105	-		230
KA628448	-	628448AM	273	KB2110	-		230
KB1000	-		229	KB2115	-		230
KB1005	-		229	KB2120	-		230
KB1010	-		229	KB2125	-		230
KB1015	-		229	KB2130	-		230
KB1020	-		229	KB2135	-		230
KB1025	-		229	KB2140	-		230
KB1030	-		229	KB2145	-		230
KB1035	-		229	KB2150	-		230
KB1040	-		229	KB2155	-		230
KB1050	-		229	KB2160	-		230
KB1055	-		229	KB2165	-		231
KB1060	-		229	KB2170	-		231
KB1065	-		229	KB2175	-		231
KB1070	-		229	KB2180	-		231
KB1075	-		229	KB2185	-		231
KB1080	-		229	KB2190	-		231
KB1085	-		229	KB2195	-		231
KB1090	-		229	KB2200	-		231
KB1095	-		229	KB2205	-		231
KB1100	-		229	KB2210	-		231
KB1105	-		229	KB2215	-		231
KB1110	-		229	KB2220	-		231
KB1115	-		229	KB2225	-		231
KB1120	-		229	KB2230	-		231
KB1125	-		229	KB2235	-		231
KB1130	-		229	KB2240	-		231
KB1135	-		230	KB2245	-		231
KB1140	-		230	KB2250	-		231
KB1145	-		230	KB2255	-		231
KB1150	-		230	KB2260	-		231
KB1160	-		230	KB2265	-		231
KB1165	-		230	KB2270	-		231
KB1170	-		230	KB2275	-		231
KB1175	-		230	KB2280	-		231

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
KB2285	-		231	KB2615	-		232
KB2290	-		231	KB2620	-		232
KB2295	-		231	KB2625	-		232
KB2300	-		231	KB2630	-		232
KB2305	-		231	KB2635	-		232
KB2310	-		231	KB2640	-		232
KB2315	-		231	KB2645	-		232
KB2320	-		231	KB2650	-		232
KB2325	-		231	KB2655	-		232
KB2330	-		231	KB2660	-		232
KB2335	-		231	KB2665	-		233
KB2340	-		231	KB2670	-		233
KB2345	-		231	KB2675	-		233
KB2350	-		231	KB2680	-		233
KB2355	-		231	KB2685	-		233
KB2360	-		231	KB2690	-		233
KB2365	-		231	KB2695	-		233
KB2370	-		231	KB2700	-		233
KB2375	-		231	KB2705	-		233
KB2380	-		231	KB2710	-		233
KB2385	-		231	KB2715	-		233
KB2390	-		231	KB2720	-		233
KB2395	-		231	KB2725	-		233
KB2400	-		231	KB2730	-		233
KB2405	-		231	KB2735	-		233
KB2410	-		231	KB2740	-		233
KB2415	-		232	KB2745	-		233
KB2420	-		232	KB2750	-		233
KB2425	-		232	KB2755	-		233
KB2430	-		232	KB2760	-		233
KB2435	-		232	KB2765	-		233
KB2440	-		232	KB2770	-		233
KB2445	-		232	KB2775	-		233
KB2450	-		232	KB2780	-		233
KB2455	-		232	KB2785	-		233
KB2460	-		232	KB2790	-		233
KB2465	-		232	KB2795	-		233
KB2470	-		232	KB2800	-		233
KB2475	-		232	KB2805	-		233
KB2480	-		232	KB2810	-		233
KB2485	-		232	KB2815	-		233
KB2490	-		232	KB2820	-		233
KB2495	-		232	KB2825	-		233
KB2500	-		232	KB2830	-		233
KB2505	-		232	KB2835	-		233
KB2510	-		232	KB2840	-		233
KB2515	-		232	KB2845	-		233
KB2520	-		232	KB2850	-		233
KB2525	-		232	KB2855	-		233
KB2530	-		232	KB2860	-		233
KB2535	-		232	KB2865	-		233
KB2540	-		232	KB2870	-		233
KB2545	-		232	KB2875	-		233
KB2550	-		232	KB2880	-		233
KB2555	-		232	KB2885	-		233
KB2560	-		232	KB2890	-		233
KB2565	-		232	KB2895	-		233
KB2570	-		232	KB2900	-		233
KB2575	-		232	KB2905	-		233
KB2580	-		232	KB2910	-		233
KB2585	-		232	KB2915	-		234
KB2590	-		232	KB2920	-		234
KB2595	-		232	KB2925	-		234
KB2600	-		232	KB2930	-		234
KB2605	-		232	KB2935	-		234
KB2610	-		232	KB2940	-		234

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
KB2945	-		234	KB3275	-		235
KB2950	-		234	KB3280	-		235
KB2955	-		234	KB3285	-		235
KB2960	-		234	KB3290	-		235
KB2965	-		234	KB3295	-		235
KB2970	-		234	KB3300	-		235
KB2975	-		234	KB3305	-		235
KB2980	-		234	KB3310	-		235
KB2985	-		234	KB3315	-		235
KB2990	-		234	KB3320	-		235
KB2995	-		234	KB3325	-		235
KB3000	-		234	KB3330	-		235
KB3005	-		234	KB3335	-		235
KB3010	-		234	KB3340	-		235
KB3015	-		234	KB3345	-		235
KB3020	-		234	KB3350	-		235
KB3025	-		234	KB3355	-		235
KB3030	-		234	KB3360	-		235
KB3035	-		234	KB3365	-		235
KB3040	-		234	KB3370	-		235
KB3045	-		234	KB3375	-		235
KB3050	-		234	KB3380	-		235
KB3055	-		234	KB3385	-		235
KB3060	-		234	KB3390	-		235
KB3065	-		234	KB3395	-		235
KB3070	-		234	KB3400	-		235
KB3075	-		234	KB3405	-		235
KB3080	-		234	KB3410	-		235
KB3085	-		234	KB3415	-		236
KB3090	-		234	KB3420	-		236
KB3095	-		234	KB3425	-		236
KB3100	-		234	KB3430	-		236
KB3105	-		234	KB3435	-		236
KB3110	-		234	KB3440	-		236
KB3115	-		234	KB3445	-		236
KB3120	-		234	KB3450	-		236
KB3125	-		234	KB3455	-		236
KB3130	-		234	KB3460	-		236
KB3135	-		234	KB3465	-		236
KB3140	-		234	KB3470	-		236
KB3145	-		234	KB3475	-		236
KB3150	-		234	KB3480	-		236
KB3155	-		234	KB3485	-		236
KB3160	-		234	KB3490	-		236
KB3165	-		235	KB3495	-		236
KB3170	-		235	KB3500	-		236
KB3175	-		235	KB3505	-		236
KB3180	-		235	KB3510	-		236
KB3185	-		235	KB3515	-		236
KB3190	-		235	KB3520	-		236
KB3195	-		235	KB3525	-		236
KB3200	-		235	KB3530	-		236
KB3205	-		235	KB3535	-		236
KB3210	-		235	KB3540	-		236
KB3215	-		235	KB3545	-		236
KB3220	-		235	KB3550	-		236
KB3225	-		235	KB3555	-		236
KB3230	-		235	KB3560	-		236
KB3235	-		235	KB3565	-		236
KB3240	-		235	KB3570	-		236
KB3245	-		235	KB3575	-		236
KB3250	-		235	KB3580	-		236
KB3255	-		235	KB3585	-		236
KB3260	-		235	KB3590	-		236
KB3265	-		235	KB3595	-		236
KB3270	-		235	KB3600	-		236

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
KB3605	-		236	KW1873/1	-		163
KB3610	-		236	KW1873/10	-		163
KB3615	-		236	KW1873/8	-	KW1873/9	163
KB3620	-		236	KW1873/9	-		163
KB3625	-		236	KW2350/1	-		112
KB3630	-		236	KW2350/2	-		112
KB3635	-		236	KW2350/5	-	KW2350/1	112
KB3640	-		236	KW2966/1	-		163
KB3645	-		236	KW3205/1	-		163
KB3650	-		236	KW3405/1	-		254
KB3655	-		236	KW3405/2	-		254
KB3660	-		236	KW3731/1	-	AC784D	254
KB3665	-		237	KW3999/1	-		122
KB3670	-		237	KW4069/1	-		249
KB3675	-		237	KW4069/2	-		249
KB3680	-		237	KW4069/3	-	0484210002000	249
KB3685	-		237	KW4069/5	-		249
KB3690	-		237	KW4081/1	-		122
KB3695	-		237	KW4282/2	-		254
KB3700	-		237	KW4455/1	-		163
KB3705	-		237	KW4617/2	-	KW4617/2SP	163
KB3710	-		237	KW4617/2SP	-		163
KB3715	-		237	KW4648/1	-		163
KB3720	-		237	KW4827/1	-		163
KB3725	-		237	KW5271/1	-	KW4455/1	163
KB3730	-		237	KW718/2	-		112
KB3735	-		237	KX1037/1	-		145
KB3740	-		237	KX1058/1	-		165
KB3745	-		237	KX1101/1	-		131
KB3750	-		237	KX1130/1	-	KX2006/1	139
KB3755	-		237	KX1130/4	-		139
KB3760	-		237	KX1294/1	-		149
KB3765	-		237	KX1294/2	-		149
KB3770	-		237	KX1294/5	-		149
KB3775	-		237	KX1685/1	-	295452	125
KB3780	-		237	KX1685/2	-	295452	125
KB3790	-		237	KX1729/1	-		253
KB3795	-		237	KX1729/2	-		253
KB3800	-		237	KX1729/3	-		253
KB3805	-		237	KX1729/4	-		253
KB3810	-		237	KX1729/5	-		253
KB3815	-		237	KX175/1	-		253
KB3820	-		237	KX175/4	-		253
KB3825	-		237	KX175/5	-		253
KB3830	-		237	KX175/6	-		253
KB3835	-		237	KX2000/1	-		149
KB3840	-		237	KX2006/1	-		139
KB3850	-		237	KX2016/1	-		163
KB3855	-		237	KX2045/1	-	KX2045/11000	127
KB3860	-		237	KX2045/11000	-		127
KB3865	-		237	KX2045/12000	-		127
KB3870	-		237	KX2045/14000	-		127
KB3875	-		237	KX2045/15000	-		127
KB3880	-		237	KX2045/16	-	KX2045/16000	127
KB3885	-		237	KX2045/16000	-		127
KB3890	-		237	KX2045/17	-	KX2045/17000	127
KB3895	-		237	KX2045/17000	-		127
KB3900	-		237	KX2045/18000	-		127
KB7623	-		177	KX2045/2	-	KX2045/12000	127
KB7635	-		177	KX2045/4	-	KX2045/14000	127
KB7638	-		187	KX2045/5	-	KX2045/15000	127
KBP2095/1	-		177	KX2045/6	-	KX2045/16000	127
KBP2127/3	-		177	KX2045/7	-	KX2045/17000	127
KU4129	-		161	KX2045/8	-	KX2045/18000	127
KU4130	-		161	KX2068/1	-		112
KW1066/1	-	SK2930/1	116	KX2068/2	-		112

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.
KX2068/2SP	-	KX2068/2	112
KX2068/3	-	KX2068/2	112
KX2068/4	-	KX2068/5	112
KX2068/5	-		112
KX2068/7	-		112
KX2068/8	-		112
KX2073/10	-		253
KX2073/13	-		253
KX2073/4	-		253
KX2073/7	-		253
KX2196/1	-		149
KX2303/3	-	VPS48NIY	120
KX2408/1	-		131
KX2408/2	-	KX2408/1	131
KX2552/1	-	1186892	149
KX2552/2	-	KX2552/3	149
KX2552/3	-		149
KX2601/2	-	KX2606/2	149
KX2606/2	-		149
KX2621/2	-		149
KX2632/2	-		149
KX424/1	-	SK2930/1	116
KX424/8	-	SK2930/1	116
KX463/1	-	SK2930/1	116
KX463/10	-	SK2930/1	116
KX463/11	-	SK2930/1	116
KX463/2	-	SK2930/1	116
KX463/24	-	SK2930/1	116
KX463/3	-	SK2930/1	116
KX463/32	-	SK2930/1	116
KX463/6	-	SK2930/1	116
KX463/8	-	SK2930/1	116
KX542/1	-	SKX542/1	127
KY1001/1SP	-	281865	162
KY1001/3	-		162
KY1036/12	-	KY1038/3	142
KY1038/2	-	KY1038/3	142
KY1038/3	-		142
KY1396/1	-		131
KY1467/23	-		139
KY1471/5	-	280375	147
KY1482/1	-		158
KY1482/2	-		158
KY1482/8	-		158
KY1497/1	-		162
KY1640/1	-		147
KY1657/1	-		147
KY1657/2	-	KY1657/1	147
KY1657/3	-	KY1657/1	147
KY1661/1	-		273
KY1670/1	-	VPS48A	120
KY1670/13	-	VPS48C	120
KY1670/3	-	VPS48B	120
KY1671/1	-	VPS48AI	120
KY1671/11	-	VPS48FIY	120
KY1671/12	-	VPS38AIY	119
KY1671/13	-	VPS48GIY	120
KY1671/14	-	VPS48HI	120
KY1671/19	-	VPS48HI	120
KY1671/4	-	VPS48DI	120
KY1671/7	-	VPS38AIY	119
KY1675/14	-		203
KY1675/9	-		203
KY1676/10	-		203
KY1683/1	-	KY1988/1	273
KY1684/1	-	KY1661/1	273

Part No.	Type No.	Replacement	Page No.
KY1724/15	-	KY1724/6	203
KY1724/16	-	KY1724/6	203
KY1724/3	-	EF90EX	203
KY1724/6	-		203
KY1728/1	-	VPS48MIY	120
KY1728/8	-	VPS48MIY	120
KY1732/2	-		156
KY1738/2	-		156
KY1767/1	-	KY1767/4	132
KY1767/10	-	KY1767/4	132
KY1767/11	-		132
KY1767/4	-		132
KY1767/5	-		132
KY1767/8	-	KY1767/9	132
KY1767/9	-		132
KY1768/2	-	2430GCLS	215
KY1770/2	-	3030GCLS	215
KY1804/6	-	KY1995/3	273
KY1804/7	-	KY1995/4	273
KY1804/8	-	KY1995/4	273
KY1804/9	-	KY1995/3	273
KY1810/1	-		148
KY1816/3	-		157
KY1837/2	-	KY2481/1	210
KY1838/1	-	KY2481/1	210
KY1916/1	-		132
KY1916/3	-		132
KY1916/4	-	KY1916/3	132
KY1929/1	-		142
KY1932/1	-	1186938	141
KY1932/2	-		142
KY1947/1	-		203
KY1956/3	-		142
KY1956/5	-		142
KY1972/1	-		142
KY1988/1	-		273
KY1994/2SP	-		142
KY1995/1	-	KY1995/3	273
KY1995/2	-	KY1995/4	273
KY1995/3	-		273
KY1995/4	-		273
KY2106/3	-		157
KY2106/5	-		157
KY2106/6	-	KY2106/5	157
KY2106/8	-		157
KY2111/7	-		157
KY2114/1	-	KY2498/1	139
KY2184/1	-		142
KY2193/1	-		142
KY2193/2	-		142
KY2193/3	-		142
KY2248/1	-		142
KY2248/2	-	KY2248/1	142
KY2248/3	-		142
KY2274/1	-		139
KY2308/1	-	AC574AXY	147
KY2310/1	-		139
KY2354/2	-	3030GCLS	215
KY2357/1	-		139
KY2452/1	-	KY2452/4	139
KY2452/3	-	KY2452/4	139
KY2452/4	-		139
KY2473/2	-		139
KY2481/1	-		210
KY2484/1	-	KY2493/2SP	142
KY2493/2SP	-		142

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
KY2497/2	-		139	KZ1257/3	-		94
KY2498/1	-		139	KZ1258/2	-	BFM121BK	216
KY2509/2	-		139	KZ1265/1	-		94
KY2528/1	-		139	KZ1265/2	-		94
KY2571/2	-		132	KZ1285/1	-		221
KY2578/1	-		142	KZ1285/3	-		221
KY2589/2	-		149	KZ1286/1	-		221
KY2589/3	-	KY2589/2	149	KZ1286/3	-		221
KY2589/4	-	KY2589/2	149	KZ1289/3	-		221
KY2590/1	-	KY2590/4	149	KZ1289/4	-		221
KY2590/2	-	KY2590/4	149	KZ1290/1	-	KZ1290/3	221
KY2590/3	-	KY2590/4	149	KZ1290/2	-	KZ1290/4	221
KY2590/4	-		149	KZ1290/3	-		221
KY2590/5	-		149	KZ1290/4	-		221
KY807/1	-		142	KZ1291/2	-		112
KY881/2	-		142	KZ1302/1RM	-	K2B0514XU	213
KY881/3	-		142	KZ1310/1	-	LA8223 (II30178)	104
KY890/1	-		142	KZ1310/2	-	LA8223 (II30178)	104
KY930/4	-		132	KZ1310/4	-	LA8223 (II30178)	104
KY930/5	-		132	KZ1326/1	-	1188882-01	216
KY932/10	-	KY932/8	139	KZ1327/1	-	LA8224 (II30182)	104
KY932/7	-		139	KZ1331/2RM	-	K2B0550XU	213
KY932/8	-		139	KZ1333/1	-	LA8257 (II31478)	105
KY952/4	-		142	KZ1333/3	-	LA8257 (II31478)	105
KY957/6	-		226	KZ1333/4	-	LA8256 (II31477)	105
KY982/1	-	KY982/2	142	KZ1341/1	-	LA8700 (II30184)	105
KY982/2	-		142	KZ1366/2	-	LA8700 (II30184)	105
KY982/6	-		142	KZ1366/3	-	LA8700 (II30184)	105
KZ1030/1	-	KZ1265/1	94	KZ396/3	-		99
KZ1030/2	-	KZ1265/1	94	KZ433/1	-	1186722SP	98
KZ1087/4	-		99	KZ433/5	-	1186722SP	98
KZ1114/1	-		94	KZ433/5SP	-	1186722SP	98
KZ1115/2	-		94	KZ433/6	-		99
KZ1122/2RM	-	K2B0526XUA	213	KZ433/6P	-	KZ433/6	99
KZ1123/2RM	-	K2B0528XUA	213	KZ488/11RM	-	K2C2004XU	213
KZ1124/2RM	-	K2B0543XUA	213	KZ488/3RM	-	K2C2004XU	213
KZ1133/2RM	-	K2B0504XU	213	KZ488/5RM	-	K2C2004XU	213
KZ1134/2RM	-	K2B0506XU	213	KZ581/2	-	K2C2023XUB	213
KZ1135/1RM	-	K2B0520XU	213	KZ595/2ARM	-	K2C2020XUB	213
KZ1137/1	-	KY2184/1	142	KZ596/1A	-	K2C2023XUB	213
KZ1137/2	-		142	KZ596/2	-	K2C2023XUB	213
KZ1143/1	-		94	KZ596/2A	-	K2C2023XUB	213
KZ1143/4	-		94	KZ596/2RM	-	K2C2023XUB	213
KZ1174/1	-	1188823	226	KZ596/7A	-	K2C2023XUB	213
KZ1174/2	-	1188823	226	KZ641/1	-	KZ396/3	99
KZ1176/7	-		218	KZ642/2	-	1189106	98
KZ1177/11	-		218	KZ758/1A	-		213
KZ1177/12	-	KZ1177/7	218	KZ758/1ARM	-	K2B1101XU	213
KZ1177/13	-		218	KZ774/1RM	-	K2B0542XUA	213
KZ1177/7	-		218	KZ774/2	-	K2B0543XUA	213
KZ1177/8	-		218	KZ774/2RM	-	K2B0543XUA	213
KZ1192/1	-		219	KZ775/1RM	-	K2B0527XUA	213
KZ1192/2	-		219	KZ775/2	-	K2B0528XUA	213
KZ1210/1	-		132	KZ775/2RM	-	K2B0528XUA	213
KZ1223/2RM	-	K2B0535XUA	213	KZ778/1RM	-	K2B0525XUA	213
KZ1228/1	-		99	KZ778/2	-		213
KZ1235/2RM	-	K2B0502XU	213	KZ778/2RM	-	K2B0526XUA	213
KZ1237/1	-	KZ1237/3	221	KZ794/1RM	-	K2C2004XU	213
KZ1237/2	-	KZ1237/4	221	KZ794/2RM	-	K2C2004XU	213
KZ1237/3	-		221	KZ794/4	-	K2C2004XU	213
KZ1237/4	-		221	KZ794/4RM	-	K2C2004XU	213
KZ1249/1	-	KY807/1	142	KZ800/4	-		94
KZ1252/3	-		221	KZ801/4	-		94
KZ1252/4	-		221	KZ802/5RM	-	KZ802/5XU	94
KZ1254/2	-	KZ1254/3	227	KZ802/5XU	-		94
KZ1254/3	-		227	KZ803/5	-		94

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
KZ804/2	-		213	SEB00028	DR4500		122
KZ804/2RM	-	K2B0504XU	213	SEB00034	AS3250		162
KZ805/2	-		213	SEB00038	AS3011	AS3054 (SEB01162)	162
KZ805/2RM	-	K2B0506XU	213	SEB00039	AS3012		162
KZ806/2	-		213	SEB00048	AS3100	AS3100A	162
KZ806/2RM	-	K2B0521XU	213	SEB00056	AE4216	AE4216 (II36159)	172
KZ807/1	-	K2C0611XU	213	SEB00057	AE4217	AE4217 (II36160)	172
KZ808/1RM	-	K2C0527XUA	213	SEB00066	KU1310	KU1310 (II17354)	160
KZ894/3	-	KZ894/4XU	219	SEB00068	AE4214	AE4232 (II36133)	172
KZ894/4XU	-		219	SEB00069	AE4215	AE4233 (II36134)	172
KZ897/9RM	-	K2B0542XUA	213	SEB00071	KU1311	KU1311 (II17355)	160
KZ958/1	-	KZ800/4	94	SEB00176	AS3102	AS3100A	162
KZ959/1	-	KZ801/4	94	SEB00177	SZ1311		281
KZ961/1	-	KZ803/5	94	SEB00214	AS3050	AS3050A	162
KZ965/12RM	-	K2B0528XUA	213	SEB00224	EE1100	VA12A	112
KZ965/13RM	-	K2B0527XUA	213	SEB00225	KU1310		160
KZ965/2RM	-	K2B0528XUA	213	SEB00226	KU1311		160
KZ974/1RM	-	K2B0526XUA	213	SEB00227	KU4124		161
KZ996/2	-		99	SEB00228	KU4128		161
LS1051	-		269	SEB00229	KU1324		160
LS1500	-		268	SEB00243	AE1215	AE1223 (SEB00669)	170
LS1500-10	-		268	SEB00253	ZB1218		254
LS2000	-		268	SEB00254	ZB1219		254
LS2000/1	-		268	SEB00255	ZB1220		254
LS2500	-		268	SEB00271	AS3051	AS3050A	162
LS2510	-		248	SEB00285	AB2793	0481061220000	155
LS3000	-		268	SEB00286	AB2802	0481061230000	156
MP11CX	-	MP11CXY	142	SEB00295	AE4196		118
MP11CXY	-		142	SEB00311	AB2777	0481061021000	155
MP11DX	-		143	SEB00317	AB2796	0481061007000	155
MP12B	-	MP12BY	143	SEB00318	BZ7408	BX9400 (II37274)	211
MP12BY	-		143	SEB00320	BZ7440	BX9400 (II37274)	211
MP12D	-		143	SEB00321	BZ7421	BX9400 (II37274)	211
MP13A	-	MP13AX	143	SEB00322	BZ7549	BX9519 (II37277)	211
MP13AX	-		143	SEB00348	LP3832		96
MP1AK	-		143	SEB00377	BZ7583	BX9521 (II37279)	211
MP1B	-		143	SEB00378	BZ7584	BX9521 (II37279)	211
MP51AX	-	MP51AY	143	SEB00406	AS3101	AS3100A	162
MP51AY	-		143	SEB00407	AS3000A		177
MP51CY	-		143	SEB00408	AS3002	AS3050A	162
MP5A	-		143	SEB00409	AS3018		162
MP70A	-		145	SEB00411	SV3125	SV3111 (I83153)	262
MP71A	-		143	SEB00416	LP1596		96
MP71B	-		143	SEB00423	BZ7583	BX9521 (II37279)	211
MS10A	-		145	SEB00424	BZ7584	BX9521 (II37279)	211
MS10B	-		145	SEB00425	BZ7408	BX9400 (II37274)	211
MS10C	-		145	SEB00426	BZ7421	BX9400 (II37274)	211
MS10D	-		145	SEB00428	BZ7440	BX9400 (II37274)	211
MS1A	-		143	SEB00429	AB2793	0481061220000	155
PU1AD	-		170	SEB00430	AB2802	0481061230000	156
PU1AS	-		170	SEB00436	KU4124	KU4124 (3660.0)	161
PU3AD	-		170	SEB00437	KU4128	KU4128 (I59068)	161
PU3AS	-		170	SEB00440	DB1230		126
PU4AD	-		170	SEB00441	DB1231		126
PU4AS	-		170	SEB00443	-		145
RA7776	-		254	SEB00455	BZ7588	BX9521 (II37279)	211
RP1A	-		148	SEB00456	BZ7346	BZ9324 (II37272)	212
RP2A	-		148	SEB00457	DB1232		126
SC2B	-		277	SEB00458	DB1233		126
SC2BK	-		277	SEB00461	BZ7418	BX9402 (II37276)	211
SDM2EK	-		158	SEB00462	BZ7445	BX9402 (II37276)	211
SDM2G	-	SDM2GA	158	SEB00466	BZ7349	BZ9324 (II37272)	212
SDM2GA	-		158	SEB00479	BZ7446	BX9402 (II37276)	211
SDM2H	-		158	SEB00480	MB4611		132
SEB00003	BZ4212		209	SEB00496	BZ7346	BZ9324 (II37272)	212
SEB00026	DR4501		122	SEB00497	BZ7349	BZ9324 (II37272)	212

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.
SEB00498	BZ7588	BX9521 (II37279)	211
SEB00500	BZ7418	BX9402 (II37276)	211
SEB00501	BZ7445	BX9402 (II37276)	211
SEB00502	BZ7446	BX9402 (II37276)	211
SEB00508	BZ7354	BZ9324 (II37272)	212
SEB00509	BZ7589	BX9521 (II37279)	211
SEB00510	BZ7451	BX9400 (II37274)	211
SEB00511	AE5123		163
SEB00512	BZ7573	BX9519 (II37277)	211
SEB00513	BZ7452	BX9402 (II37276)	211
SEB00514	BZ7652	BZ9657 (II37281)	212
SEB00520	AB2831	0481061225000	155
SEB00527	BZ7549	BX9519 (II37277)	211
SEB00529	BZ3583		199
SEB00535	SV3128	SV3115 (I86024)	262
SEB00536	-		240
SEB00541	BZ7355	BZ9324 (II37272)	212
SEB00542	BZ7356	BZ9324 (II37272)	212
SEB00552	BZ7436	BX9400 (II37274)	211
SEB00553	BZ7573	BX9519 (II37277)	211
SEB00554	BZ7624	BZ9657 (II37281)	212
SEB00577	BZ7354	BZ9324 (II37272)	212
SEB00578	BZ7451	BX9400 (II37274)	211
SEB00579	BZ7452	BX9402 (II37276)	211
SEB00580	BZ7589	BX9521 (II37279)	211
SEB00581	BZ7573	BX9519 (II37277)	211
SEB00582	BZ7652	BZ9657 (II37281)	212
SEB00583	BZ7354	BZ9324 (II37272)	212
SEB00584	BZ7451	BX9400 (II37274)	211
SEB00585	BZ7452	BX9402 (II37276)	211
SEB00586	BZ7589	BX9521 (II37279)	211
SEB00587	BZ7573	BX9519 (II37277)	211
SEB00588	BZ7652	BZ9657 (II37281)	212
SEB00601	BZ7455	BX9400 (II37274)	211
SEB00624	DB1234		126
SEB00631	MB4691		132
SEB00638	DB1235		126
SEB00650	LP3852		96
SEB00651	BR5504		144
SEB00658	BR5503		144
SEB00659	BR4352		141
SEB00661	BR4351		141
SEB00662	AE1124		268
SEB00667	AE1125		268
SEB00669	AE1223		170
SEB00670	AE1224		170
SEB00671	AE1225		170
SEB00672	AE1226		170
SEB00681	KU4124	KU4124 (3660.0)	161
SEB00682	KU4128	KU4128 (I59068)	161
SEB00683	MB4665		132
SEB00684	DR4502		122
SEB00687	KU4128		161
SEB00694	VG3310	VG3310 (SEB01707)	274
SEB00778	-		167
SEB00786	AB2802	0481061230000	156
SEB00787	AE1227		170
SEB00791	AB2793	0481061220000	155
SEB00792	AB2831	0481061225000	155
SEB00820	LP4818		99
SEB00836	LP4819	LP4845 (SEB01455000)	99
SEB00846	AS3053	AS3050A	162
SEB00873	BX7502		211
SEB00874	AB2836	0481061248000	156
SEB00875	AB2838	0481061248000	156
SEB00876	AE1129		111

Part No.	Type No.	Replacement	Page No.
SEB00882	BZ7657	BZ9657 (II37281)	212
SEB00901	AE4230	AE4230 (II36128)	172
SEB00901M2	AE4230	AE4230 (II36128)	172
SEB00907	BZ3593	BZ3593 (SEB01426)	199
SEB00912	AE4231	AE4231 (II36161)	172
SEB00917	AE4232	AE4232 (II36133)	172
SEB00918	AE4233	AE4233 (II36134)	172
SEB00933	BR4370		141
SEB00934	BR5520		144
SEB00948	BZ7462	BX9402 (II37276)	211
SEB00952	-		199
SEB00953	BZ3598		199
SEB00954	BZ3599		199
SEB00979	BR4371		141
SEB00981	BX3504	BX3534 (II33441)	198
SEB00984	BX3507	BX3538 (II33485)	198
SEB00992	BX3515		197
SEB01031	-		199
SEB01042	BX3403		197
SEB01067	BR4352		141
SEB01091	BR5508		144
SEB01098	MB4611		132
SEB01100	RE3310		148
SEB01115	AE4440		118
SEB01120	MB4697		132
SEB01145	MB4613		132
SEB01149	LK1554	LK1567 (SEB01686)	95
SEB01151	LP3860		97
SEB01152	LP3861		97
SEB01154	LP4939		100
SEB01155	LP4940		100
SEB01156	LP4941		100
SEB01157	LP4942		100
SEB01158	LP4943		100
SEB01159	LP4944		100
SEB01160	LP4945		100
SEB01162	AS3054		162
SEB01163	BR5522	BR5522 (II36836)	144
SEB01183	DB1237		126
SEB01204	DB1238		126
SEB01205	MB4699		132
SEB01213	AE4246	AE4246 (II36125)	172
SEB01213M2	AE4246	AE4246 (II36125)	172
SEB01214	AE4247	AE4247 (II36127)	172
SEB01214M2	AE4247	AE4247 (II36127)	172
SEB01221	BZ7462	BX9402 (II37276)	211
SEB01224	DB1239		127
SEB01226	AE1135		268
SEB01237	-		127
SEB01241	BR5524		145
SEB01245	LP4832		99
SEB01251	AE4449		119
SEB01258	DB1240		127
SEB01265	AE4214	AE4232 (II36133)	172
SEB01267	BX7514		215
SEB01268	BX7515	BX7523 (II36944)	215
SEB01269	BX7401		215
SEB01270	BX7611		215
SEB01271	AS3100	AS3100A	162
SEB01272	AE4216	AE4216 (II36159)	172
SEB01273	AE4450		119
SEB01274	AE4451		119
SEB01279	BR4355		141
SEB01288	BX7516		215
SEB01296	DB2138		154
SEB01307	-		199

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
SEB01313	DB2139		154	SEB01784	LP4983		100
SEB01314	-		240	SEB01795000	LP3970		97
SEB01315	-		240	SEB01805	LK3855		95
SEB01316	-		240	SEB01813	LK3857		96
SEB01318	BX3430	BX3416 (II33458)	197	SEB01816	LK3854		95
SEB01326	BR5522		144	SEB01817	LK3846		95
SEB01333	AB2860		156	SEB01819	LK3840		95
SEB01334	BX3526		197	SEB01841	LK3859		96
SEB01343	MB4614		132	SEB01842000	LK3994		96
SEB01344	BR5523		145	SEB22110	-	KU4124 (3660.0)	161
SEB01362	BX3507	BX3538 (II33485)	198	SEB22111	-	KU4128 (I59068)	161
SEB01364	BX3430	BX3416 (II33458)	197	SIL68A	-	SIL68ASP	249
SEB01387	KU1310	KU1310 (II17354)	160	SIL68ASP	-		249
SEB01388	KU1311	KU1311 (II17355)	160	SIL68B	-		250
SEB01389	KU4124	KU4124 (3660.0)	161	SIL68BK	-		250
SEB01390	KU4128	KU4128 (I59068)	161	SK2767/2	-		106
SEB01395	BX7402		215	SK2767/5	-		106
SEB01396	BX7518		215	SK2767/8	-	267125SP	106
SEB01397	BX7519	BX7525 (II36946)	215	SK2914/1	-		106
SEB01398	BX7612		215	SK2930/1	-		116
SEB01426	BZ3593		199	SK2930/2	-	SK2930/1	116
SEB01430	LP4843		99	SK2973/1	-		208
SEB01432	AE1137		268	SK2973/2	-		208
SEB01441	LP4819	LP4845 (SEB01455000)	99	SK2973/3	-		208
SEB01446	KU4128	KU4128 (I59068)	161	SK2973/4	-		208
SEB01452	LP4827	LP4845 (SEB01455000)	99	SK2973/5	-		208
SEB01455	LP4845	LP4845 (SEB01455000)	99	SK3000/1	-		106
SEB01455000	LP4845		99	SK3000/2	-		106
SEB01472	LP4840		99	SK3000/3	-		106
SEB01476	DB1246		127	SK3000/4	-		106
SEB01478	LP4846		99	SKV10000	-		273
SEB01480	LP4849		100	SKW3027/1	-		145
SEB01481	MB4665		132	SKX1248/1	-		122
SEB01485	LP4833		99	SKX542/1	-		127
SEB01487	DB1248		127	SM1A	-		273
SEB01496	LP4838		99	SM1B	-		273
SEB01509	BR5524		145	SM2A	-		273
SEB01510	BR5524		145	SMP2A	-		153
SEB01534	AE4232	AE4232 (II36133)	172	SMP2B	-		153
SEB01535	AE4233	AE4233 (II36134)	172	SMP2C	-		153
SEB01536	AE4246	AE4246 (II36125)	172	SMP2D	-		153
SEB01537	AE4247	AE4247 (II36127)	172	SP463/5	-		253
SEB01537M2	AE4247	AE4247 (II36127)	172	STK3769	-		201
SEB01538	DB2144		154	STK3770	-		201
SEB01539	-		154	T13886	LA2100	LA2100 (I13886)	110
SEB01542	AB2863		156	T14911	AE4100	AE4100 (I14911)	164
SEB01545	LP4851		100	T25351	AE5101	AE5101 (I25351)	163
SEB01586	LK3833		95	T27754	AE4200	AE4200 (I68034)	172
SEB01588	LP4852		100	T28323	AE2100	AE2100 (I28323)	170
SEB01597	LK3834		95	T41333	SV1219	SV1219 (I41333)	259
SEB01599	LK3835		95	T46365	RE1105	RE1105 (I46365)	148
SEB01601	LK3836		95	T47836	AE4115	AE4115 (I47836)	118
SEB01602	LK3837		95	T47852	SV1219	SV1219 (I41333)	259
SEB01603	LK3838		95	T48227	AE4110	AE4110 (I48227)	118
SEB01604	LK3839		95	T58921	SV1261	SV1261 (I58921)	259
SEB01605	LK3840		95	T60422	AE5102	AE5102 (I60422)	163
SEB01606000	LK3841		95	T61751	SV1261	SV1261 (I58921)	259
SEB01676	LP4999		100	T63354	RE2221	RE2221 (I63354)	148
SEB01686	LK1567		95	T66231	DR3211	0481039225000	115
SEB01707	VG3310		274	T66760	AE4146	AE4146 (I85731)	164
SEB01747	LP4855		100	T68034	AE4200	AE4200 (I68034)	172
SEB01759	LK3853		95	T68180	AE4118	AE4118 (I68180)	118
SEB01768	LK3850		95	T74772	EE4103	EE4115 (I92054)	112
SEB01781	LP4830		99	T75461	DR3232	0481039258000	115
SEB01782	LP4823		99	T84866	EE4104	EE4104 (I84866)	112
SEB01783000	LP4984		100	T85731	AE4146	AE4146 (I85731)	164

Product Numbers in Part Number order

Part No.	Type No.	Replacement	Page No.	Part No.	Type No.	Replacement	Page No.
TK6337	-		208	VPS48NY	-		120
TK6338	-		208	VSR2A	-		150
TK6353	-		208	VSR2B	-	KX1294/2	149
TK6354	-		208	VTP1	-		268
VA12A	-		112	WC1M583596	-		261
VA2A	-		253	Y002809	BX3555		198
VPC2B	-		122	Y002810	BX3556		198
VPC2C	-		123	Y004227	BS3343		206
VPC2G	-		123	Y004232	BS3447		206
VPC2N	-		123	Z000557	-		245
VPC2P	-		123	Z001548	-		183
VPC2T	-		123	Z001631	-		245
VPC2TA	-	VPC2T	123	Z001632	-		245
VPC3A	-		123	Z001633	-		245
VPC3B	-		123	Z001634	-		245
VPC3D	-		123	Z001635	-		245
VPC3L	-		123	Z001636	-		245
VPC4A	-		123	Z001637	-		245
VPC4B	-		123	Z001638	-		245
VPC4D	-		123	Z001655	-		183
VPC4F	-		123	Z001656	-		183
VPC5D	-		123	Z002016	-		245
VPC6C	-		123	Z002017	-		245
VPS30B	-		119	Z003755	-		245
VPS38AIY	-		119	Z003890	-		245
VPS38BIY	-		119	Z003934	-		246
VPS38BY	-		119	Z0040021	-		240
VPS40A	-	VPS40AAY	119	Z0040022	-		240
VPS40AA	-	VPS40AAY	119	Z004190	-		246
VPS40AAY	-		119	Z004197	-		246
VPS40AY	-	VPS40AAY	119	Z004198	-		246
VPS40C	-	VPS40CY	119	Z004338	-		245
VPS40CY	-		119	Z004354	-		246
VPS41A	-	VPS41AY	119	Z004357	-		246
VPS41AY	-		119	Z004361	-		246
VPS41B	-	VPS41BY	119	Z005464	EZ1033		183
VPS41BY	-		119	Z006407	-		245
VPS41C	-	VPS41CY	119				
VPS41CY	-		119				
VPS42A	-	VPS41CY	119				
VPS45A	-		119				
VPS45AY	-		119				
VPS45B	-		119				
VPS45BI	-		119				
VPS45C	-		120				
VPS45HY	-		120				
VPS45HYK	-		120				
VPS46BB	-		120				
VPS48A	-		120				
VPS48AI	-		120				
VPS48B	-		120				
VPS48C	-		120				
VPS48D	-		120				
VPS48DI	-		120				
VPS48EIY	-		120				
VPS48FIY	-		120				
VPS48FY	-		120				
VPS48GIY	-		120				
VPS48GY	-		120				
VPS48H	-		120				
VPS48HI	-		120				
VPS48HYY	-		120				
VPS48LI	-		120				
VPS48MIY	-		120				
VPS48MY	-		120				
VPS48NIY	-		120				

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.
AB2750	I46599		156
AB2761	I60363		156
AB2762	I77419	0481061007000	155
AB2764	I75800		156
AB2767	I77420	0481061020000	155
AB2772	I71772		156
AB2777	I77422	0481061021000	155
AB2777	SEB00311	0481061021000	155
AB2778	I77418		156
AB2780	I76289		156
AB2782	I790551	0481061228000	155
AB2783	I79056	0481061219000	155
AB2787	I80004	0481061225000	155
AB2792	I80274	0481061228000	155
AB2793	I80275	0481061220000	155
AB2793	SEB00285	0481061220000	155
AB2793	SEB00429	0481061220000	155
AB2793	SEB00791	0481061220000	155
AB2794	I77617	0481061213000	155
AB2795	I77618	0481061214000	155
AB2796	I81820	0481061007000	155
AB2796	SEB00317	0481061007000	155
AB2797	I82919	0481061220000	155
AB2798	I83347	0481061226000	155
AB2800	I83478	0481061215000	155
AB2802	SEB00286	0481061230000	156
AB2802	SEB00430	0481061230000	156
AB2802	SEB00786	0481061230000	156
AB2808	I97326	0481061005000	155
AB2813	I85810	0481061021000	155
AB2814	I87610	0481061215000	155
AB2815	I87611		156
AB2816	I87674	0481061230000	156
AB2817	I87675	0481061232000	156
AB2818	I87676	0481061023000	155
AB2819	I87677	0481061004000	155
AB2822	II17292		156
AB2831	SEB00520	0481061225000	155
AB2831	SEB00792	0481061225000	155
AB2834	I93261	0481061228000	155
AB2835	I93262	0481061219000	155
AB2836	SEB00874	0481061248000	156
AB2838	SEB00875	0481061248000	156
AB2840	I93362		156
AB2846	II15332		156
AB2851	II15334	AB2851 (II37151)	156
AB2851	II37151		156
AB2852	II19428	AB2852 (II37152)	156
AB2852	II37152		156
AB2854	II33044		156
AB2860	SEB01333		156
AB2863	SEB01542		156
AB3405	II31400		156
AE1103	I60496		264
AE1107	I58483		170
AE1109	I67763		170
AE1109	I677631		170
AE1111	I66920		170
AE1114	I73682		170
AE1117	I79027		170
AE1118	I79028		170
AE1121	I80289		170
AE1122	I83425		264
AE1124	SEB00662		268
AE1125	SEB00667		268
AE1129	SEB00876		111

Type No.	Part No.	Replacement	Page No.
AE1135	SEB01226		268
AE1136	II30527		170
AE1137	SEB01432		268
AE1141	II36224		268
AE1201	I26755		170
AE1206	I75794		170
AE1207	I78964		170
AE1208	I79713		170
AE1215	SEB00243	AE1223 (SEB00669)	170
AE1223	SEB00669		170
AE1224	SEB00670		170
AE1225	SEB00671		170
AE1226	SEB00672		170
AE1227	SEB00787		170
AE1300	I69281		116
AE2100	I28323		170
AE2100	T28323	AE2100 (I28323)	170
AE2109	I99961		170
AE2110	II33261		170
AE4100	I14911		164
AE4100	T14911	AE4100 (I14911)	164
AE4102	I15658		164
AE4103	I17154		164
AE4105	I40405		164
AE4110	I48227		118
AE4110	I48227A	AE4110 (I48227)	118
AE4110	T48227	AE4110 (I48227)	118
AE4115	I47836		118
AE4115	T47836	AE4115 (I47836)	118
AE4116	I53027	AE4110 (I48227)	118
AE4116	I53027A	AE4110 (I48227)	118
AE4118	I68180		118
AE4118	T68180	AE4118 (I68180)	118
AE4130	I58600	AE4115 (I47836)	118
AE4135	I63753	AE4162 (I73329)	118
AE4138	I63733	AE4158 (I70615)	118
AE4146	I66760	AE4146 (I85731)	164
AE4146	I85731		164
AE4146	T66760	AE4146 (I85731)	164
AE4146	T85731	AE4146 (I85731)	164
AE4158	I70615		118
AE4158	I85513	AE4158 (I70615)	118
AE4162	I73329		118
AE4162	I85512	AE4162 (I73329)	118
AE4162	I99810		118
AE4168	I75300		118
AE4169	I75596		118
AE4170	I77243	VPS41CY	119
AE4170	I85510	VPS41CY	119
AE4171	I77451	VPS41AY	119
AE4177	I79444		118
AE4178	I80190	0481062301000	117
AE4178	I99811		118
AE4179	I80509		118
AE4180	I81192		118
AE4183	I79379		118
AE4183	II15591		118
AE4185	I81272		118
AE4186	I81510		118
AE4187	I81522	AE4178 (I99811)	118
AE4188	I81523	0481062309000	117
AE4190	I82587		118
AE4191	I83313		118
AE4196	SEB00295		118
AE4200	I27754	AE4200 (I68034)	172
AE4200	I68034		172

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.
AE4200	T27754	AE4200 (I68034)	172
AE4200	T68034	AE4200 (I68034)	172
AE4212	I53417		166
AE4214	SEB00068	AE4232 (II36133)	172
AE4214	SEB01265	AE4232 (II36133)	172
AE4215	SEB00069	AE4233 (II36134)	172
AE4216	II36159		172
AE4216	SEB00056	AE4216 (II36159)	172
AE4216	SEB01272	AE4216 (II36159)	172
AE4217	II36160		172
AE4217	SEB00057	AE4217 (II36160)	172
AE4230	II36128		172
AE4230	II36132	AE4230 (II36128)	172
AE4230	SEB00901	AE4230 (II36128)	172
AE4230	SEB00901M2	AE4230 (II36128)	172
AE4231	II36161		172
AE4231	SEB00912	AE4231 (II36161)	172
AE4232	II36133		172
AE4232	SEB00917	AE4232 (II36133)	172
AE4232	SEB01534	AE4232 (II36133)	172
AE4233	II36134		172
AE4233	SEB00918	AE4233 (II36134)	172
AE4233	SEB01535	AE4233 (II36134)	172
AE4246	II36125		172
AE4246	II36126		172
AE4246	SEB01213	AE4246 (II36125)	172
AE4246	SEB01213M2	AE4246 (II36125)	172
AE4246	SEB01536	AE4246 (II36125)	172
AE4247	II36109	AE4247 (II36127)	172
AE4247	II36109M2	AE4247 (II36127)	172
AE4247	II36127		172
AE4247	II36129		172
AE4247	II36131		172
AE4247	SEB01214	AE4247 (II36127)	172
AE4247	SEB01214M2	AE4247 (II36127)	172
AE4247	SEB01537	AE4247 (II36127)	172
AE4247	SEB01537M2	AE4247 (II36127)	172
AE4252	I90168		164
AE4257	II16068		172
AE4257	II18068		172
AE4261	II19803		172
AE4262	II19802		172
AE4264	II36055		172
AE4265	II36061		172
AE4266	II36062		172
AE4311	II36230	AE4311 (K000896)	172
AE4311	K000896		172
AE4311	K001664		172
AE4404	I88768		118
AE4405	I89408000		118
AE4407	I90156		118
AE4408	I92478	AE4427 (II15587000)	118
AE4409	I92503		118
AE4411	I93648		118
AE4412	I93517	VPS40AAY	119
AE4422	II18172		118
AE4423	II14296		118
AE4427	II15587	AE4427 (II15587000)	118
AE4427	II15587000		118
AE4428	II15588	AE4428 (II15588000)	118
AE4428	II15588000		118
AE4431	II15080		118
AE4434	II16098		118
AE4437	II17189		118
AE4440	SEB01115		118
AE4443	II17791		118

Type No.	Part No.	Replacement	Page No.
AE4446	II18167		118
AE4447	II18490		118
AE4447	II39775F		119
AE4448	II18754		119
AE4449	SEB01251		119
AE4450	SEB01273		119
AE4451	SEB01274		119
AE4452	II31480	AE4452 (II31480000)	119
AE4452	II31480000		119
AE4459	II35525		119
AE4463	K000055		119
AE4500	II16546	AE4510 (II37680)	119
AE4500	II36005	AE4510 (II37680)	119
AE4502	II37679		119
AE4503	II38677F		119
AE4505	II31163		119
AE4506	II36008	AE4506 (II38797F)	119
AE4506	II38797F		119
AE4510	II37680		119
AE4516	II38745F		119
AE4525	II37922		119
AE4526	II39010F		119
AE4527	II37463		119
AE4527	II37463M2	AE4527 (II37463)	119
AE4528	II37464		119
AE4528	II37464M2	AE4528 (II37464)	119
AE4529	II38749F		119
AE4534	K001001		119
AE4603	II36011	AE4603 (II36011000)	119
AE4603	II36011000		119
AE4604	II36012	AE4604 (II36012000)	119
AE4604	II36012000		119
AE4605	II36650		119
AE4608	II37461		119
AE4609	II37460		119
AE4610	II37462		119
AE4611	II33856		119
AE4612	II38801F		119
AE4613	II38802F		119
AE4615	II39140F		119
AE4617	II36154		119
AE4620	II40246F		119
AE4621	II40259F		119
AE4623	K000500		119
AE4625	K000516		119
AE5101	I25351		163
AE5101	I25351A	AE5101 (I25351)	163
AE5101	T25351	AE5101 (I25351)	163
AE5102	I60422		163
AE5102	T60422	AE5102 (I60422)	163
AE5107	I40939		163
AE5107	I40939A	AE5107 (I40939)	163
AE5107	I60884		163
AE5115	I75598		163
AE5115	I82259	AE5115 (I75598)	163
AE5118	I75785	AE5102 (I60422)	163
AE5123	SEB00511		163
AE5131	K001349		163
AE7104	I33540		253
AE7105	I39967	AE7104 (I33540)	253
AE7110	K000701		253
AE9125	I93544	EA1152 (II32611)	248
AE9126	I93543		248
AF1100	I2006		110
AS3000A	65830001	AS3000A (SEB00407)	162
AS3000A	SEB00407		177

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.
AS3002	SEB00408	AS3050A	162
AS3011	SEB00038	AS3054 (SEB01162)	162
AS3012	SEB00039		162
AS3018	SEB00409		162
AS3050	SEB00214	AS3050A	162
AS3051	SEB00271	AS3050A	162
AS3053	SEB00846	AS3050A	162
AS3054	SEB01162		162
AS3100	SEB00048	AS3100A	162
AS3100	SEB01271	AS3100A	162
AS3101	SEB00406	AS3100A	162
AS3102	SEB00176	AS3100A	162
AS3250	SEB00034		162
AS5203	I59353		162
AS6101	I33804		162
AS7000	I93552	AS7000A	162
AS7100	I93553		162
BF-1/1	I77997		130
BF-1/2	I88682		130
BR1105	I84573		141
BR1300	I22337	BR1305 (I84575)	141
BR1305	I84575		141
BR1306	I84576		141
BR4253	I80653		141
BR4263	I80655		141
BR4265	I80657		141
BR4351	SEB00661		141
BR4352	SEB00659		141
BR4352	SEB01067		141
BR4355	SEB01279		141
BR4370	SEB00933		141
BR4371	SEB00979		141
BR4411	I78307		141
BR4411	I84033	BR4411 (I78307)	141
BR4412	I81595		141
BR4412-G	I84034	BR4412 (I81595)	141
BR4413	I84253		142
BR4414	I84450		142
BR4415	I84451		142
BR4420	I85280		142
BR4421	I85281		142
BR4423	I90908		142
BR4429	I92295		142
BR4431	I88474		142
BR4431-G	I93297	BR4431 (I88474)	142
BR4439	II14591		142
BR4441	II15372		142
BR4442	II14892		142
BR4443	II14893		142
BR4444	II14894		142
BR4445	II14895		142
BR4451	II16783	BR4466 (II36827)	142
BR4453	II17649		142
BR4454	II18069		142
BR4455	II18784		142
BR4456	II18785		142
BR4457	II18786		142
BR4458	II33922		142
BR4465	II36826		142
BR4466	II36827		142
BR4467	II36828		142
BR4468	II36829		142
BR5311	I84709	BR5522 (II36836)	144
BR5325	I75321		144
BR5331	I76333		144
BR5332	I76370		144

Type No.	Part No.	Replacement	Page No.
BR5342	I81040		144
BR5407	I94299		144
BR5408	I73358		144
BR5420	I78888		144
BR5503	SEB00658		144
BR5504	SEB00651		144
BR5508	SEB01091		144
BR5520	SEB00934		144
BR5522	II36836		144
BR5522	SEB01163	BR5522 (II36836)	144
BR5522	SEB01326		144
BR5523	SEB01344		145
BR5524	SEB01241		145
BR5524	SEB01509		145
BR5524	SEB01510		145
BR5530	II36818		145
BR5534	II37168		145
BR5604	II19423		145
BR5605	I98733		145
BR5605	II19424		145
BR5607	I92160		145
BR5608	I92161		145
BR5611	I93565		145
BR5615	II14588		145
BR5616	II14589		145
BR5617	II14590		145
BR5619	II18036		145
BR5628	II19416		145
BR5630	II19418		145
BR5633	II31402		145
BR5643	II32766		145
BR5645	II32792		145
BR5648	II33921		145
BR5655	II36839		145
BR5656	II37154		145
BR5657	II37166		145
BR5704	I93912		145
BR5705	I94301		145
BR5712	II17353		145
BR6110	I69426		142
BR9131	I93270	BR9152 (II16278)	175
BR9133	I94812	BR9150 (II15492)	175
BR9150	II15492		175
BR9151	II15687		175
BR9152	II16278		175
BR9154	II17776		175
BR9156	II32612		175
BR9157	II35462		175
BR9159	II40864F		175
BR9161	II18596	BR9161 (II32618)	175
BR9161	II32618		175
BR9162	II37084		175
BR9163	II38659F		176
BR9164	II38660F		176
BR9180	II37086		176
BR9182	II38665F		176
BR9200	II14240	BR9232 (II32614)	176,192
BR9231	II30522		176,192
BR9232	II32614		176,192
BR9233	II37090		176,188
BR9234	II37091		176,188
BR9235	II40868F		176
BS2500	II38472F		205
BS2501	II38473F		205
BS2502	II38474F		205
BS2503	II38475F		205

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BS2504	II39205F		205	BS3415	II32710		206
BS2511	K000501		205	BS3420	II33897		206
BS2514	K001027		205	BS3423	II36779		206
BS2515	K001028		205	BS3424	II37865		206
BS2516	K001603		205	BS3430	II38107F		206
BS2517	K001604		205	BS3433	II38404F		206
BS2518	K001633		205	BS3434	II38413F		206
BS3201	II36967		205	BS3435	II38414F		206
BS3202	II37861		205	BS3436	II38528F		206
BS3204	II38400F		205	BS3437	II38574F		206
BS3205	II39191F		205	BS3440	II38591F		206
BS3207	II39193F		205	BS3441	II39201F		206
BS3250	II32963		205	BS3442	II39323F		206
BS3251	II31782		205	BS3443	II39324F		206
BS3252	II32167		205	BS3447	Y004232		206
BS3255	II33050		205	BS3450	II14540		206
BS3257	II36968		205	BS3451	II18850000		207
BS3263	II38455F		205	BS3452	II18886		207
BS3269	II39196F		205	BS3453	II31099		207
BS3270	II39214F		205	BS3455	II33898		207
BS3271	II39215F		205	BS3456	II34670		207
BS3273	II40349F		205	BS3457	II34671		207
BS3300	II14535000		205	BS3458	II36780		207
BS3301	II30614		205	BS3462	II38529F		207
BS3309	II33895		205	BS3467	II39203F		207
BS3313	II36969		205	BS3468	II39578F		207
BS3314	II37110		205	BS3469	II39579F		207
BS3315	II37140000		205	BS3471	K001214		207
BS3316	II37315		205	BS3472	K001215		207
BS3317	II37316		205	BS3502	II18209		207
BS3318	II37863		205	BS3503	II18210		207
BS3320	II38105F		205	BS3505	II18950		207
BS3321	II38111F		206	BS3506	II18951		207
BS3322	II38402F		206	BS3509	II30618000		207
BS3323	II38411F		206	BS3514	II32597		207
BS3324	II38412F		206	BS3515	II32598		207
BS3325	II38462F		206	BS3516	II32599		207
BS3326	II38466F		206	BS3517	II31651		207
BS3327	II38556F		206	BS3518	II31652		207
BS3331	II38589F		206	BS3520	II32164		207
BS3335	II39218F		206	BS3521	II32165		207
BS3336	II39374F		206	BS3522	II32172		207
BS3337	II39375F		206	BS3524	II32593		207
BS3338	II39693F		206	BS3526	II32723		207
BS3340	II39927F		206	BS3527	II33899		207
BS3341	II39928F		206	BS3528	II33903		207
BS3342	II40493F		206	BS3532	II36781		207
BS3343	Y004227		206	BS3536	II37133		207
BS3350	II15229000		206	BS3537	II37134		207
BS3352	II33896		206	BS3538	II37127		207
BS3354	II36778		206	BS3547	II38530F		207
BS3355	II37864		206	BS3551	II31100		207
BS3357	II38403F		206	BS3569	K002113		207
BS3358	II38527F		206	BS3570	K002162		207
BS3361	II38924F		206	BS3601	II31101		207
BS3362	II39199F		206	BS3602	II34021		207
BS3363	II39602F		206	BS3603	II34211		207
BS3364	II39603F		206	BS3604	II34850		207
BS3401	II32592		206	BS3605	II34851		207
BS3402	II30616		206	BS3606	II37143		207
BS3403	II30617		206	BS3607	II37144		207
BS3404	II31098000		206	BS7301	II38102F	BS7304 (II38524F000)	222
BS3409	II32595		206	BS7302	II38118F	BS7304 (II38524F000)	222
BS3410	II32169		206	BS7303	II38119F	BS7304 (II38524F000)	222
BS3411	II32170		206	BS7304	II38524F	BS7304 (II38524F000)	222
BS3412	II32171		206	BS7304	II38524F000		222

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BS7305	II38564F	BS7304 (II38524F000)	222	BS9193	II37520		223
BS7306	II38936F	BS7309 (II39355F000)	222	BS9196	II36338		223
BS7307	II38937F	BS7309 (II39355F000)	222	BS9197	II33885		223
BS7309	II39355F	BS7309 (II39355F000)	222	BS9198	II33647		223
BS7309	II39355F000		222	BS9265	K000978		223
BS7310	II39356F	BS7309 (II39355F000)	222	BS9266	K000979		223
BS7312	II39933F		222	BS9267	K001483		223
BS7313	II39934F		222	BS9269	K001902		223
BS7350	II38120F	BS7350 (II38120F000)	222	BS9270	K001903		223
BS7350	II38120F000		222	BS9271	K001887		223
BS7351	II38525F	BS7350 (II38120F000)	222	BS9283	K001976		223
BS7352	II38565F	BS7350 (II38120F000)	222	BS9285	II38577F	BS9297 (II31783000)	223
BS8302	II39687F		222	BS9286	II38531F	BS9297 (II31783000)	223
BS8304	II39925F		222	BS9287	II38428F		223
BS8305	II39926F		222	BS9295	II33886		223
BS8307	II39969F		222	BS9296	II33648		223
BS8307	II40494F		222	BS9297	II31783	BS9297 (II31783000)	223
BS8308	II39970F		222	BS9297	II31783000		223
BS8308	II40495F		222	BS9304	II30619	BS9304 (II30619000)	223
BS8309	II39967F		222	BS9304	II30619000		223
BS8309	II40496F		222	BS9305	II32600		223
BS8310	II39968F		222	BS9306	II32601000		223
BS8310	II40497F		222	BS9308	II32700000		223
BS8320	K001181		222	BS9311	II32175000		223
BS8321	K001182		222	BS9320	II33767		223
BS8322	K001898		222	BS9321	II33770		223
BS8323	K001899		222	BS9322	II33992		223
BS8413	K001031		222	BS9323	II33998		223
BS8414	K001032		222	BS9326	II37264		223
BS8415	K001238		222	BS9327	II37265		223
BS8424	K001760		222	BS9330	II37317		223
BS8425	K001761		222	BS9331	II37318		223
BS8426	K001970		222	BS9332	II37883		223
BS8427	K001971		222	BS9335	II38110F	BS9304 (II30619000)	223
BS8450	II40500F		222	BS9338	II38467F	BS9304 (II30619000)	223
BS8451	II40501F		222	BS9339	II38580F	BS9304 (II30619000)	223
BS8452	K000699		222	BS9345	II38579F	BS9349 (II31663000)	224
BS8453	K000700		222	BS9346	II38532F	BS9349 (II31663000)	224
BS8500	II38470F000		222	BS9349	II31663	BS9349 (II31663000)	224
BS8501	II38471F000		222	BS9349	II31663000		224
BS8502	II38486F		222	BS9353	II33993		224
BS8503	II38487F		222	BS9354	II33999		224
BS8504	II38534F		222	BS9355	II34184		224
BS8506	II38547F		223	BS9356	II35736	BS9356 (II35736000)	224
BS8516	II38922F		223	BS9356	II35736000		224
BS8517	II39219F	BS8517 (II39219F000)	223	BS9357	II37885		224
BS8517	II39219F000		223	BS9358	II37886		224
BS8518	II39220F	BS8517 (II39219F000)	223	BS9359	II39600F		224
BS8519	II39614F		223	BS9360	II39601F		224
BS8520	II39929F		223	BS9366	K001605		224
BS8521	II39930F		223	BS9367	K001606		224
BS8522	II39958F		223	BS9373	II39213F		224
BS8529	K000797		223	BS9374	II39212F		224
BS8530	K000798		223	BS9375	II38595F	BS9377 (II38496F000)	224
BS9083	K001436		223	BS9376	II38578F	BS9397 (II31227000)	224
BS9084	K001437		223	BS9377	II38496F	BS9377 (II38496F000)	224
BS9086	K001029		223	BS9377	II38496F000		224
BS9087	K001030		223	BS9378	II38497F	BS9377 (II38496F000)	224
BS9088	II39935F		223	BS9379	II38465F	BS9397 (II31227000)	224
BS9089	II39936F		223	BS9382	II38407F		224
BS9090	II39210F		223	BS9383	II38122F	BS9377 (II38496F000)	224
BS9092	II38488F		223	BS9384	II38100F	BS9397 (II31227000)	224
BS9093	II38489F		223	BS9385	II38101F	BS9397 (II31227000)	224
BS9188	II38049F		223	BS9386	II37871		224
BS9189	II37867		223	BS9387	II37870		224
BS9190	II37866		223	BS9390	II37138		224

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BS9391	II37139		224	BS9508	II32173		225
BS9395	II32159		224	BS9509	II32174		225
BS9396	II32160		224	BS9510	II33679		225
BS9397	II31227	BS9397 (II31227000)	224	BS9514	II33062		225
BS9397	II31227000		224	BS9517	II33996		225
BS9398	II18224		224	BS9518	II34002		225
BS9404	II31407	BX9400 (II37274)	211	BS9519	II34187		225
BS9404	II31407000	BX9400 (II37274)	211	BS9520	II34388		225
BS9405	II32604000		224	BS9522	II34870		225
BS9406	II32605000		224	BS9523	II35112		225
BS9407	II32602000		224	BS9524	II35699		225
BS9409	II32606		224	BS9526	II19461000		225
BS9410	II32607		224	BS9527	II34198		225
BS9411	II32701000		224	BS9528	II35719		225
BS9412	II32702000		224	BS9531	II37124		225
BS9420	II33994		224	BS9534	II37282		225
BS9421	II34000		224	BS9535	II37468		225
BS9424	II34185		224	BS9536	II37747000		225
BS9426	II31097	BS9426 (II31097000)	224	BS9555	BS9555		225
BS9426	II31097000		224	BS9556	BS9556		225
BS9427	II34392		224	BS9557	BS9557		225
BS9428	II34393		224	BX3403	SEB01042		197
BS9433	II36962		224	BX3413	II31918		197
BS9434	II36972	BS9434 (II36972F)	224	BX3416	II33458		197
BS9434	II36972F		224	BX3417	II33479		197
BS9437	II37266		224	BX3418	II33480		197
BS9438	II37267		224	BX3419	II33782		197
BS9445	II37887		224	BX3430	SEB01318	BX3416 (II33458)	197
BS9446	II37888		224	BX3430	SEB01364	BX3416 (II33458)	197
BS9448	II37909		224	BX3504	SEB00981	BX3534 (II33441)	198
BS9450	II30477		224	BX3507	SEB00984	BX3538 (II33485)	198
BS9451	II31226	BS9451 (II31226000)	224	BX3507	SEB01362	BX3538 (II33485)	198
BS9451	II31226000		224	BX3515	SEB00992		197
BS9455	II33995		224	BX3526	SEB01334		197
BS9456	II34001		224	BX3528	II31232		198
BS9457	II34186		224	BX3531	II31919		198
BS9458	II34389		224	BX3532	II31920		198
BS9461	II37906		224	BX3534	II33441		198
BS9462	II38116F		225	BX3535	II33442		198
BS9463	II38132F		225	BX3537	II33484		198
BS9471	II38124F	BX9400 (II37274)	211	BX3538	II33485		198
BS9474	II38393F		225	BX3538	II33783		198
BS9475	II38394F		225	BX3539	II33486		198
BS9476	II38408F		225	BX3541	II34855		198
BS9478	II38522F		225	BX3550	II37508		198
BS9479	II38533F	BX9400 (II37274)	211	BX3555	Y002809		198
BS9480	II38551F		225	BX3556	Y002810		198
BS9482	II38552F		225	BX3602	II31406		198
BS9482	II38568F		225	BX3604	II33444		198
BS9483	II38569F		225	BX3605	II33445		198
BS9484	II38570F		225	BX3606	II33487		198
BS9485	II38581F	BX9400 (II37274)	211	BX3607	II33784		198
BS9486	II38599F	BX9400 (II37274)	211	BX3608	II33489		198
BS9487	II39222F		225	BX7401	SEB01269		215
BS9488	II39575F		225	BX7402	SEB01395		215
BS9489	II39576F		225	BX7406	II36948		215
BS9491	II39668F		225	BX7408	II36950		215
BS9492	II39669F		225	BX7409	II36951		215
BS9499	II40323F		225	BX7502	SEB00873		211
BS9500	II32608		225	BX7503	II14304	BX9520 (II37278)	211
BS9502	II32703		225	BX7504	II14305	BX9520 (II37278)	211
BS9503	II31408		225	BX7514	SEB01267		215
BS9504	II32609000		225	BX7515	SEB01268	BX7523 (II36944)	215
BS9505	II32697		225	BX7516	SEB01288		215
BS9506	II32009		225	BX7517	II30301	BX9519 (II37277)	211
BS9507	II32161000		225	BX7518	SEB01396		215

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BX7519	SEB01397	BX7525 (II36946)	215	BY3259	II35869		202
BX7520	II31469	BX9519 (II37277)	211	BY3301	I83658		202
BX7521	II36339		215	BY3303	I86291		202
BX7523	II36944		215	BY3309	I93320		202
BX7524	II36945		215	BY3313	II32158		202
BX7525	II36946		215	BY3315	II38398F		202
BX7526	II36947		215	BY3354	I89182	EF180HY	203
BX7527	II36973		215	BY3357	II14308	EF180BY	203
BX7528	II37141		211	BY3404	I98802	EF201LY	203
BX7611	SEB01270		215	BY3405	BY3405	EF201BY	203
BX7612	SEB01398		215	BY3405	I98804	EF201BY	203
BX9400	II37274		211	BY3406	II37730	EF241BY	203
BX9401	II37275		211	BY3408	II39666F		202
BX9402	II37276		211	BY3454	I98806	EF221LY	203
BX9403	II38064F	BX9400 (II37274)	211	BY3455	BY3455	EF221BY	203
BX9404	II38065F	BX9400 (II37274)	211	BY3456	II18694		202
BX9416	II38446F	BX9402 (II37276)	211	BY3505	I98810	EF241LY	203
BX9425	II39689F		211	BY3506	I98812	EF241BY	203
BX9425	II40491F		211	BY3509	II37731		202
BX9426	II39690F		211	BY3510	K002171		202
BX9500	II31409	BX9519 (II37277)	211	BY7006	I90543		217
BX9501	II31410	BX9519 (II37277)	211	BY7109	I86320	BY7114 (I88636)	220
BX9502	II32126	BX9519 (II37277)	211	BY7114	I88636		220
BX9503	II32715	BX9519 (II37277)	211	BY7115	I88637		220
BX9504	II32718	BX9521 (II37279)	211	BY7116	I90474		217
BX9506	II32735	BX9521 (II37279)	211	BY7138	I92730		217
BX9507	II32736	BX9521 (II37279)	211	BY7151	I82046	BY7151 (I86321)	220
BX9508	II32737	BX9521 (II37279)	211	BY7151	I86321		220
BX9509	II34029		211	BY7152	I86322	BY9153 (II18525000)	220
BX9517	II36529	BX9519 (II37277)	211	BY7153	I87500	BFM105BK	216
BX9517	II36863	BX9519 (II37277)	211	BY7156	I89329	BFM105CXX	216
BX9518	II36864	BX9519 (II37277)	211	BY7157	I89330	BFM105DXK	216
BX9519	II37277		211	BY7203	I86323		220
BX9520	II37278		211	BY7205	I87162		217
BX9521	II37279		211	BY7206	I90921		217
BX9522	II37097	BX9519 (II37277)	211	BY7209	I82413		217
BX9525	II37734	BX9521 (II37279)	211	BY7210	I82414	BY7210 (I87164)	217
BX9526	II37735	BX9521 (II37279)	211	BY7210	I87164		217
BX9529	II38068F	BX9519 (II37277)	211	BY7214	I86324	BY9201 (II16576000)	220
BX9530	II38069F	BX9519 (II37277)	211	BY7221	I93650	BFM121BXX	216
BX9533	II38074F		211	BY7225	I85435	BFM121CXX	216
BX9534	II38421F		211	BY7226	I85436	BFM121BK	216
BX9535	II38452F	BX9519 (II37277)	211	BY7237	I88201	BY9202 (II17085)	217
BX9536	II38453F	BX9519 (II37277)	211	BY7238	I82352	BFM122BK	216
BX9539	II39184F	BX9520 (II37278)	211	BY7240	I87770	BFM121EK	216
BY1501	I93218		202	BY7248	I87566		220
BY1502	II18766		202	BY7249	I87567		220
BY3100	I90029	EF90EX	203	BY7258	I84127	BY9258 (II19397)	217
BY3104	I88146	EF90EX	203	BY7258	I88202	BY9258 (II19397)	217
BY3106	I89264		202	BY7268	I90439		217
BY3109	BY3109	EF90AY	203	BY7308	I88203	BY9312 (II19361)	217
BY3151	I90030	EF105AX	202	BY8151	I98433	BY9150 (II16486)	217
BY3152	I88548	EF105AX	202	BY8203	I92291		217
BY3156	I98796	EF105BY	202	BY8204	I93253		217
BY3159	BY3159	EF105FY	202	BY8211	I98435	BY9205 (II17468)	217
BY3201	I93403		202	BY8212	I98437	BY9205 (II17468)	217
BY3202	I81955		202	BY8214	I98439	BY9207 (II17470)	217
BY3211	I92376		202	BY8218	II16242	BY9217 (II31649)	217
BY3212	I92518		202	BY8221	II31907		217
BY3220	II30089		202	BY8251	I98772	BY9251 (II17472)	217
BY3226	II39596F		202	BY8252	I98774	BY9305 (II17474)	217
BY3251	I82038	0482023504000	204	BY8253	I99776	BY9306 (II17475)	217
BY3251	I86378	0482023504000	204	BY9000	II18887		220
BY3252	I86007		202	BY9001	II18888		220
BY3255	I98815	EF141BY	203	BY9100	II18006		217
BY3257	II31796		202	BY9103	II18523000		220

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BY9104	II18524000		220	BY9412	II37313		218
BY9107	II31549		217	BY9414	II38931F		218
BY9109	II31994		217	BY9416	II40488F		221
BY9113	II38097F		217	BY9417	II40489F		221
BY9114	II38906F		217	BY9450	I98824		218
BY9115	II38907F		217	BY9451	II17755		218
BY9150	II16486		217	BY9452	II18692		218
BY9153	II18525000		220	BY9453	II18693		218
BY9154	II18526000		220	BY9458	II32122		218
BY9157	II31550		217	BY9461	II36728		221
BY9158	II31995		217	BY9462	II36729		221
BY9200	II16575000		220	BY9463	II37342		218
BY9201	II16576000		220	BY9500	I98825		218
BY9202	II17085		217	BY9501	II17756		218
BY9205	II17468		217	BY9502	II18222		218
BY9206	II17469	BY9205 (II17468)	217	BY9504	II18691		218
BY9207	II17470		217	BY9505	II34017		218
BY9208	II17564		217	BY9506	II37145		218
BY9213	II19456		217	BY9508	II39940F		221
BY9215	II30091		217	BY9512	K002163		218
BY9216	II31551		217	BZ1110	I90027		201
BY9217	II31649		217	BZ1200	I35800		201
BY9219	II31654		217	BZ1300	I35806		201
BY9220	II31996		217	BZ1304	I71352		201
BY9223	II35106		220	BZ1400	I35807		201
BY9224	II35107		220	BZ1400	I63105	BZ1400 (I35807)	201
BY9225	II36537		217	BZ1600	I35810		201
BY9227	II38904F		217	BZ1614	I84567		201
BY9228	II38905F		217	BZ1615	I93014		201
BY9230	II39595F		217	BZ1616	II30127		201
BY9250	II17471		217	BZ1624	31162420		211
BY9251	II17472		217	BZ1624	K001369		211
BY9258	II19397		217	BZ1700	I35814		201
BY9260	II19750		217	BZ1800	I35829		201
BY9263	II30393	BY9263 (II30393000)	220	BZ1808	I92494		201
BY9263	II30393000		220	BZ2030	K001368		211
BY9269	II36716		217	BZ2424	31242450		211
BY9270	II36717		217	BZ3106	I58477	EF90AB	203
BY9272	II39358F		217	BZ3107	I58732		202
BY9274	II39606F		217	BZ3108	I60323		202
BY9276	K001057		217	BZ3110	I66845		202
BY9300	II15571		217	BZ3117	I78042		202
BY9303	II17086		217	BZ3212	I58733	EF120E	203
BY9304	II17473		217	BZ3212	I97471	EF120E	203
BY9305	II17474		217	BZ3213	I60324	EF120D	203
BY9306	II17475		217	BZ3214	I60838		202
BY9308	II18844		220	BZ3217	I67388	EF120P	203
BY9309	II18845		221	BZ3217	I97472	EF120P	203
BY9312	II19361		217	BZ3218	I67761	EF120D	203
BY9314	II19469		218	BZ3218	I97474	EF120D	203
BY9321	II35117		221	BZ3221	I70694		202
BY9322	II36724		221	BZ3222	I73335		202
BY9323	II36725	BY9323 (II36725000)	221	BZ3230	I75792	EF120C	203
BY9323	II36725000		221	BZ3252	I84385	EF120L	203
BY9328	II39229F		218	BZ3253	I88827		202
BY9329	II39372F		218	BZ3258	II19744		198
BY9331	K001059		218	BZ3259	II39906F		198
BY9350	I98822		218	BZ3260	II39907F	BZ3259 (II39906F)	198
BY9351	II16159		218	BZ3261	II39908F		198
BY9400	I98823		218	BZ3263	II40324F		198
BY9401	II16160		218	BZ3324	I61423		198
BY9402	II16567		218	BZ3332	I78491		198
BY9408	II32135		218	BZ3353	I89000		198
BY9409	II36726		221	BZ3357	I93289		198
BY9410	II36727		221	BZ3358	I97001		198
BY9411	II37312		218	BZ3368	II31230		198

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BZ3370	II33198		198	BZ6405	I48016		214
BZ3371	II33199		198	BZ6413	I50156		214
BZ3372	II33455		198	BZ6417	I78399		214
BZ3373	II33456		198	BZ6420	I66031		214
BZ3374	II33457		198	BZ6425	I76463		214
BZ3374	II33781		198	BZ6427	I82454		214
BZ3377	II37741		198	BZ6507	I54743		214
BZ3377	K000725		198	BZ6513	I55985	BZ6515 (I63476)	214
BZ3433	I61128		198	BZ6515	I63476		214
BZ3434	I61129		198	BZ6517	I66032		214
BZ3438	I66003		198	BZ6616	I55749	BZ6621 (I66033)	214
BZ3439	I66004		198	BZ6621	I66033		214
BZ3440	I75266		198	BZ7104	I94915		218
BZ3441	I75267		198	BZ7105	I94916		218
BZ3442	I75268		198	BZ7112	I80153		218
BZ3443	I75269		198	BZ7113	I80157		218
BZ3444	I75270		198	BZ7114	I80152		218
BZ3448	I68143		198	BZ7141	I86141		218
BZ3449	I68144		198	BZ7209	I94919		218
BZ3460	I76474		198	BZ7210	I94920		218
BZ3464	I77743		198	BZ7222	I80147		218
BZ3473	I86003		199	BZ7226	I80145		218
BZ3480	I87109		199	BZ7228	I80151		218
BZ3481	I88250		199	BZ7236	I75798	BY7205 (I87162)	217
BZ3488	I98113		199	BZ7238	I76512	BY7206 (I90921)	217
BZ3490	I98818		199	BZ7242	I76513	BY7210 (I87164)	217
BZ3491	I98817		199	BZ7268	I84249		218
BZ3520	I73322	BZ3593 (SEB01426)	199	BZ7311	I73649		212
BZ3534	I61131	BZ3538 (I66006)	199	BZ7312	I74214		212
BZ3537	I66005		199	BZ7313	I74215		212
BZ3538	I66006		199	BZ7315	I74217		212
BZ3545	I74159		199	BZ7316	I74252		212
BZ3549	I75419		210	BZ7317	I83531	BZ9324 (II37272)	212
BZ3552	I76259		210	BZ7318	I76833	BZ9324 (II37272)	212
BZ3555	I77744		199	BZ7319	I76897	BZ9324 (II37272)	212
BZ3573	I88252		199	BZ7320	I77096	BZ9324 (II37272)	212
BZ3583	SEB00529		199	BZ7323	I80253	BZ9324 (II37272)	212
BZ3588	I90962		199	BZ7324	I80260		212
BZ3589	I98423		199	BZ7325	I83509	BZ9324 (II37272)	212
BZ3590	I98819		199	BZ7326	I80262	BZ9324 (II37272)	212
BZ3591	I98820		199	BZ7327	I80263	BZ9324 (II37272)	212
BZ3593	SEB00907	BZ3593 (SEB01426)	199	BZ7327	II30625	BZ9324 (II37272)	212
BZ3593	SEB01426		199	BZ7328	I80264		212
BZ3595	II31556		199	BZ7330	I80426	BZ9324 (II37272)	212
BZ3598	SEB00953		199	BZ7331	I83510	BZ9324 (II37272)	212
BZ3599	SEB00954		199	BZ7334	I80255	BZ9324 (II37272)	212
BZ3645	I76260		210	BZ7335	I80256	BZ9324 (II37272)	212
BZ3713	I76261		210	BZ7338	I80259	BZ9324 (II37272)	212
BZ4150	I69652		209	BZ7341	I84208	BZ9309 (II18960)	212
BZ4202	I42736	AC659AA	209	BZ7346	SEB00456	BZ9324 (II37272)	212
BZ4202	I427361	AC659AA	209	BZ7346	SEB00496	BZ9324 (II37272)	212
BZ4204	I48198		209	BZ7347	I89614	BZ9324 (II37272)	212
BZ4212	SEB00003		209	BZ7348	I89615	BZ9324 (II37272)	212
BZ4304	I29358		209	BZ7349	SEB00466	BZ9324 (II37272)	212
BZ4307	I39961		209	BZ7349	SEB00497	BZ9324 (II37272)	212
BZ4314	I48028		209	BZ7352	I90976	BZ9324 (II37272)	212
BZ4316	I50858		209	BZ7353	I90977	BZ9324 (II37272)	212
BZ4320	I68201		209	BZ7354	SEB00508	BZ9324 (II37272)	212
BZ4321	I71199		209	BZ7354	SEB00577	BZ9324 (II37272)	212
BZ4402	I69395		209	BZ7354	SEB00583	BZ9324 (II37272)	212
BZ4600	I71427		209	BZ7355	SEB00541	BZ9324 (II37272)	212
BZ5407	I88090		210	BZ7356	SEB00542	BZ9324 (II37272)	212
BZ5408	I88091		210	BZ7358	I93612	BZ9324 (II37272)	212
BZ5410	I88263		210	BZ7359	I93613	BZ9324 (II37272)	212
BZ5411	I88325		210	BZ7361	I94171	BZ9325 (II37273)	212
BZ5507	I88092		210	BZ7364	II14635	BZ9325 (II37273)	212

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BZ7365	II14636	BZ9325 (II37273)	212	BZ7573	SEB00512	BX9519 (II37277)	211
BZ7367	II30483	BZ9318 (II33453)	212	BZ7573	SEB00553	BX9519 (II37277)	211
BZ7368	II30484	BZ9319 (II33454)	212	BZ7573	SEB00581	BX9519 (II37277)	211
BZ7408	SEB00318	BX9400 (II37274)	211	BZ7573	SEB00587	BX9519 (II37277)	211
BZ7408	SEB00425	BX9400 (II37274)	211	BZ7575	I92695		212
BZ7409	I80266	BX9400 (II37274)	211	BZ7581	I97041	BZ7581 (II34867)	212
BZ7413	I76875	BX9402 (II37276)	211	BZ7581	II34867		212
BZ7414	I80270	BX9402 (II37276)	211	BZ7582	I97048	BZ7582 (II34868)	212
BZ7418	I80271	BX9402 (II37276)	211	BZ7582	II34868		212
BZ7418	SEB00461	BX9402 (II37276)	211	BZ7583	SEB00377	BX9521 (II37279)	211
BZ7418	SEB00500	BX9402 (II37276)	211	BZ7583	SEB00423	BX9521 (II37279)	211
BZ7419	I80272	BZ7419 (II19279)	212	BZ7584	SEB00378	BX9521 (II37279)	211
BZ7419	II19279		212	BZ7584	SEB00424	BX9521 (II37279)	211
BZ7420	I80267	BX9400 (II37274)	211	BZ7587	I88447	BZ9559 (II37098)	212
BZ7421	SEB00321	BX9400 (II37274)	211	BZ7588	SEB00455	BX9521 (II37279)	211
BZ7421	SEB00426	BX9400 (II37274)	211	BZ7588	SEB00498	BX9521 (II37279)	211
BZ7422	I80265	BX9400 (II37274)	211	BZ7589	SEB00509	BX9521 (II37279)	211
BZ7423	I83512	BX9402 (II37276)	211	BZ7589	SEB00580	BX9521 (II37279)	211
BZ7436	SEB00552	BX9400 (II37274)	211	BZ7589	SEB00586	BX9521 (II37279)	211
BZ7440	SEB00320	BX9400 (II37274)	211	BZ7591	I94912	BZ9559 (II37098)	212
BZ7440	SEB00428	BX9400 (II37274)	211	BZ7593	I86775	BZ9559 (II37098)	212
BZ7442	I87605	BZ9412 (II18961)	212	BZ7594	I86776	BZ9559 (II37098)	212
BZ7443	I88707	BX9401 (II37275)	211	BZ7599	I88443	BZ9559 (II37098)	212
BZ7445	SEB00462	BX9402 (II37276)	211	BZ7624	I85083	BZ9657 (II37281)	212
BZ7445	SEB00501	BX9402 (II37276)	211	BZ7624	SEB00554	BZ9657 (II37281)	212
BZ7446	SEB00479	BX9402 (II37276)	211	BZ7629	I81235	BZ9657 (II37281)	212
BZ7446	SEB00502	BX9402 (II37276)	211	BZ7637	I85943	BZ9657 (II37281)	212
BZ7447	I90843	BZ7447 (II14006)	212	BZ7640	I86132	BZ9657 (II37281)	212
BZ7447	II14006		212	BZ7641	I86133	BZ9657 (II37281)	212
BZ7448	I90844	BZ7448 (II14007)	212	BZ7643	I88607	BZ9657 (II37281)	212
BZ7448	II14007		212	BZ7644	I88608	BZ9657 (II37281)	212
BZ7451	SEB00510	BX9400 (II37274)	211	BZ7646	I90125	BZ9657 (II37281)	212
BZ7451	SEB00578	BX9400 (II37274)	211	BZ7647	I90150	BZ9657 (II37281)	212
BZ7451	SEB00584	BX9400 (II37274)	211	BZ7648	I90151	BZ9657 (II37281)	212
BZ7452	SEB00513	BX9402 (II37276)	211	BZ7649	I90860	BZ9657 (II37281)	212
BZ7452	SEB00579	BX9402 (II37276)	211	BZ7652	SEB00514	BZ9657 (II37281)	212
BZ7452	SEB00585	BX9402 (II37276)	211	BZ7652	SEB00582	BZ9657 (II37281)	212
BZ7453	I92062		212	BZ7652	SEB00588	BZ9657 (II37281)	212
BZ7455	SEB00601	BX9400 (II37274)	211	BZ7657	SEB00882	BZ9657 (II37281)	212
BZ7460	II14309	BX9401 (II37275)	211	BZ9301	II14552	BZ9324 (II37272)	212
BZ7461	II14310	BX9401 (II37275)	211	BZ9302	II14553	BZ9324 (II37272)	212
BZ7462	SEB00948	BX9402 (II37276)	211	BZ9303	II14554	BZ9324 (II37272)	212
BZ7462	SEB01221	BX9402 (II37276)	211	BZ9304	II14555	BZ9324 (II37272)	212
BZ7519	I63819		212	BZ9305	II17087	BZ9325 (II37273)	212
BZ7536	I98981		212	BZ9306	II17088	BZ9325 (II37273)	212
BZ7537	I83538	BX9519 (II37277)	211	BZ9307	II17089	BZ9325 (II37273)	212
BZ7539	I80268	BX9519 (II37277)	211	BZ9308	II18528	BZ9324 (II37272)	212
BZ7540	I80269		212	BZ9309	II18960		212
BZ7541	I80582		212	BZ9310	II19030	BZ9325 (II37273)	212
BZ7543	I82242		212	BZ9311	II19031	BZ9325 (II37273)	212
BZ7545	I83560	BX9519 (II37277)	211	BZ9312	II19260	BZ9325 (II37273)	212
BZ7546	I83561	BX9519 (II37277)	211	BZ9317	II31997	BZ9324 (II37272)	212
BZ7547	I84293	BX9519 (II37277)	211	BZ9318	II33453		212
BZ7549	I85439	BX9519 (II37277)	211	BZ9319	II33454		212
BZ7549	SEB00322	BX9519 (II37277)	211	BZ9323	II36862	BZ9324 (II37272)	212
BZ7549	SEB00527	BX9519 (II37277)	211	BZ9324	II37272		212
BZ7555	I85690	BX9519 (II37277)	211	BZ9325	II37273		212
BZ7559	I87520		212	BZ9326	II38060F	BZ9324 (II37272)	212
BZ7561	I88708	BX9520 (II37278)	211	BZ9327	II38061F	BZ9324 (II37272)	212
BZ7564	I90845	BZ7564 (II14008)	212	BZ9330	II38131F	BZ9324 (II37272)	212
BZ7564	II14008		212	BZ9331	II38133F		212
BZ7567	I90846	BZ7567 (II14009)	212	BZ9401	II14557	BX9400 (II37274)	211
BZ7567	II14009		212	BZ9402	II14558	BX9400 (II37274)	211
BZ7570	I90912	BZ9506 (II17479)	212	BZ9403	II14559	BX9400 (II37274)	211
BZ7571	I90913	BZ9507 (II17480)	212	BZ9404	II16854	BX9400 (II37274)	211
BZ7572	I90967	BX9519 (II37277)	211	BZ9404	II16854000		212

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
BZ9405	II16855	BX9400 (II37274)	211	BZ9558	II34004		212
BZ9405	II16855000		212	BZ9559	II37098		212
BZ9406	II16852	BX9401 (II37275)	211	BZ9566	II40321F		212
BZ9407	II17090	BX9401 (II37275)	211	BZ9568	K001256		212
BZ9408	II15224	BX9400 (II37274)	211	BZ9600	II17095	BZ9614 (II37280)	212
BZ9409	II17091	BX9401 (II37275)	211	BZ9601	II17096	BZ9614 (II37280)	212
BZ9412	II18961		212	BZ9602	II19267	BZ9614 (II37280)	212
BZ9414	II19261	BX9401 (II37275)	211	BZ9603	II19268	BZ9614 (II37280)	212
BZ9415	II19262	BX9401 (II37275)	211	BZ9604	II19269	BZ9614 (II37280)	212
BZ9416	II19263	BX9401 (II37275)	211	BZ9605	II30294	BZ9614 (II37280)	212
BZ9417	II19342	BX9400 (II37274)	211	BZ9614	II37280		212
BZ9417	II19342000		212	BZ9624	II39347F		212
BZ9418	II30212	BX9400 (II37274)	211	BZ9625	II17247	BZ9657 (II37281)	212
BZ9424	II32006		212	BZ9626	II17924	BZ9657 (II37281)	212
BZ9425	II14560	BZ9425 (II14560000)	212	BZ9627	II18206	BZ9657 (II37281)	212
BZ9425	II14560000		212	BZ9628	II18842	BZ9657 (II37281)	212
BZ9426	II14561	BX9402 (II37276)	211	BZ9630	II19748	BZ9657 (II37281)	212
BZ9427	II14562	BX9402 (II37276)	211	BZ9631	II19749	BZ9657 (II37281)	212
BZ9428	II17414	BX9402 (II37276)	211	BZ9632	II30021	BZ9657 (II37281)	212
BZ9429	II18230	BX9402 (II37276)	211	BZ9644	II31091	BZ9657 (II37281)	212
BZ9430	II18409	BX9402 (II37276)	211	BZ9645	II31104	BZ9657 (II37281)	212
BZ9431	II18410	BX9402 (II37276)	211	BZ9646	II32128	BZ9657 (II37281)	212
BZ9432	II18411	BX9402 (II37276)	211	BZ9647	II33490	BZ9657 (II37281)	212
BZ9435	II18515	BX9402 (II37276)	211	BZ9648	II33545	BZ9657 (II37281)	212
BZ9436	II18516	BX9402 (II37276)	211	BZ9649	II33546	BZ9657 (II37281)	212
BZ9440	II31789	BX9402 (II37276)	211	BZ9650	II33547	BZ9657 (II37281)	212
BZ9442	II32124	BX9400 (II37274)	211	BZ9656	II36790	BZ9657 (II37281)	212
BZ9443	II32127	BX9402 (II37276)	211	BZ9657	II37281		212
BZ9444	II32734	BX9402 (II37276)	211	BZ9661	K001255		212
BZ9445	II32738	BX9402 (II37276)	211	DB1102	I61235		126
BZ9446	II32739	BX9402 (II37276)	211	DB1103	I61236		126
BZ9447	II33675000		212	DB1104	I22144		126
BZ9451	II36985	BX9401 (II37275)	211	DB1105	I61237		126
BZ9452	II36986	BX9401 (II37275)	211	DB1113	I61240		126
BZ9500	II14564	BX9519 (II37277)	211	DB1114	I61241		126
BZ9501	II14565	BX9519 (II37277)	211	DB1116	I61707		126
BZ9501	II14566	BX9519 (II37277)	211	DB1132	I63963	AC152AA	125
BZ9502	II17092	BX9520 (II37278)	211	DB1143	I83747		126
BZ9503	II17093	BX9520 (II37278)	211	DB1145	I86170		126
BZ9504	II17094	BX9520 (II37278)	211	DB1147	I97953		126
BZ9505	II17436	BX9519 (II37277)	211	DB1151	I73591	DB1151 (I79644)	126
BZ9506	II17479		212	DB1151	I79644		126
BZ9507	II17480		212	DB1159	I84927		126
BZ9509	II18849	BX9519 (II37277)	211	DB1230	SEB00440		126
BZ9510	II19020	BX9519 (II37277)	211	DB1231	SEB00441		126
BZ9512	II19264	BX9520 (II37278)	211	DB1232	SEB00457		126
BZ9513	II19265	BX9520 (II37278)	211	DB1233	SEB00458		126
BZ9514	II19266	BX9520 (II37278)	211	DB1234	SEB00624		126
BZ9515	II19270	BX9519 (II37277)	211	DB1235	SEB00638		126
BZ9516	II19757	BX9520 (II37278)	211	DB1237	SEB01183		126
BZ9517	II19759	BX9519 (II37277)	211	DB1238	SEB01204		126
BZ9523	II30475		212	DB1239	SEB01224		127
BZ9524	II32005		212	DB1240	SEB01258		127
BZ9527	II19473	BX9521 (II37279)	211	DB1246	SEB01476		127
BZ9528	II19747	BX9521 (II37279)	211	DB1248	SEB01487		127
BZ9529	II30079	BX9521 (II37279)	211	DB2110	I43387		153
BZ9531	II30210	BX9521 (II37279)	211	DB2111	I50402		153
BZ9532	II30211	BX9521 (II37279)	211	DB2113	I53929		151
BZ9547	II31090	BX9519 (II37277)	211	DB2114	I68498	DB2114 (I86153)	153
BZ9548	II31102	BX9519 (II37277)	211	DB2114	I86153		153
BZ9549	II31786	BX9520 (II37278)	211	DB2115	I86154		153
BZ9550	II17925	BZ9559 (II37098)	212	DB2116	I68496	DB2116 (I86155)	153
BZ9551	II17926	BZ9559 (II37098)	212	DB2116	I86155		153
BZ9552	II18846	BZ9559 (II37098)	212	DB2116	II36219		153
BZ9553	II18971		212	DB2116	K001043		153
BZ9554	II18972		212	DB2116	K001047		153

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.
DB2118	I86156		153
DB2118	K001045		153
DB2121	I86157		153
DB2121	II36077		153
DB2122	I86158		153
DB2122	K001044		153
DB2123	I72796	DB2123 (I86159)	153
DB2123	I86159		153
DB2135	II14891		151
DB2137	II36081		153
DB2138	SEB01296		154
DB2139	SEB01313		154
DB2141	II36019		153
DB2141	II36020	DB2141 (II36019)	153
DB2142	II36021		153
DB2142	II36022	DB2142 (II36021)	153
DB2143	II36023		153
DB2143	II36024	DB2143 (II36023)	153
DB2144	SEB01538		154
DB2220	I77200		153
DB2221	I77201		153
DB2222	I77202		153
DB2231	I78414		153
DB2237	II14111		153
DB2240	II15724		153
DB2244	II36065		153
DB2245	II36066		153
DB2246	II36067		153
DB2247	II36068		153
DMDV-01	I69964		127
DR2112	I50138		115
DR3102	I53724	0481039202000	114
DR3200	I54395	0481039221000	115
DR3200	I78209	0481039221000	115
DR3201	I55133	0481039222000	115
DR3211	T66231	0481039225000	115
DR3215	I68675	0481039220000	114
DR3216	I68649	0481039258000	115
DR3223	I71052	0481039253000	115
DR3223	I710521	0481039253000	115
DR3224	I71347	0481039257000	115
DR3231	I82501	0481039225000	115
DR3232	I75461	0481039258000	115
DR3232	T75461	0481039258000	115
DR3238	I78861	0481039221000	115
DR3239	I79023	0481039253000	115
DR3402	I75526	0481042223000	115
DR3416	I82304	0481042208000	115
DR3500	I82342	0481039201000	114
DR3500	I88061	0481039201000	114
DR3500	I90309	0481039201000	114
DR3500	I903091	0481039201000	114
DR3501	I82707	0481039205000	114
DR3501	I88062	0481039205000	114
DR3501	I90310	0481039205000	114
DR3502	I90311	0481039209000	114
DR3503	I82708	0481039213000	114
DR3503	I90312	0481039213000	114
DR3508	I82811	0481039211000	114
DR3509	I82812	0481039259000	115
DR3510	I82813	0481039235000	115
DR3510	II14130	0481039235000	115
DR3513	I82816		116
DR3515	I82818	AC135AYZ	115
DR3518	I83409	0481039214000	114
DR3519	I83644		116

Type No.	Part No.	Replacement	Page No.
DR3524	I85000	AC135HYZ	115
DR3526	I86859		116
DR3528	I86620	0481039220000	114
DR3529	I88063	0481039202000	114
DR3530	I90313	0481039206000	114
DR3531	I90314	0481039241000	115
DR3532	I88336	0481039241000	115
DR3533	I88438	0481039210000	114
DR3534	I88439	0481039216000	114
DR3537	I92172	0481039201000	114
DR3541	I92485	0481039235000	115
DR3542	I93257		116
DR3546	I94037		116
DR3547	I94038		116
DR3548	I94039		116
DR3549	I94369	0481042214000	115
DR3550	I94761		116
DR3551	I94881		116
DR3559	II15406		116
DR3570	II19761		116
DR3572	II34988	0481039215000	114
DR3575	II31471		116
DR3576	II37032		116
DR3576	II37032VO	DR3576 (II37032)	116
DR3579	II36084	0481042209000	115
DR4102	I28847		122
DR4120	I69841		122
DR4121	I69842	DR4125 (I69846)	122
DR4122	I69843		122
DR4123	I69844	DR4125 (I69846)	122
DR4125	I69846		122
DR4126	I69847	DR4125 (I69846)	122
DR4128	I75349		122
DR4132	I75353		122
DR4135	II36146		122
DR4206	I36924		122
DR4230	I69848		122
DR4231	I69849		122
DR4232	I69850		122
DR4233	I69851		122
DR4234	I69852	DR4236 (I69854)	122
DR4235	I69853		122
DR4235	I698531	DR4235 (I69853)	122
DR4236	I69854		122
DR4239	I75355		122
DR4242	I82402		122
DR4245	I89125		122
DR4256	K000630		122
DR4301	I27927		122
DR4304	I27929	DR4344 (I69860)	122
DR4305	I33379		122
DR4309	I41424		122
DR4331	I71315		122
DR4340	I69856		122
DR4341	I69857	DR4341 (II30267)	122
DR4341	II30267		122
DR4342	I69858		122
DR4344	I69860		122
DR4345	I69861		122
DR4348	I69864		122
DR4350	I69866		122
DR4352	I75356		122
DR4354	I75358		122
DR4357	I87006		122
DR4363	II18067		122
DR4378	K000644		122

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
DR4379	K000645		122	EK3011	II141568000		185
DR4500	SEB00028		122	EK3013	II3541710000		187
DR4501	SEB00026		122	EK3013	II3541712000		187
DR4502	SEB00684		122	EK3013	II3541715000		187
DR5117	I84406		253	EK3013	II354172000		187
DR5118	I84414		253	EK3013	II354173000		187
DR5121	I89684		253	EK3013	II354174000		187
DR5122	I94158		253	EK3013	II35417500		187
DR5124	I97489		253	EK3013	II354175000		187
DR5125	I99812		253	EK3013	II354177000		187
DRV-1	I37739		164	EK3013	II354178000		187
EA1152	II32611		248	EK3015	I9770410000		185
EDR1/6	I79002		167	EK3015	I9770412000		185
EE1100	I94095	VA12A	112	EK3015	I9770415000		185
EE1100	SEB00224	VA12A	112	EK3015	I977045000		185
EE1106	I85893		111	EK3020	I9725710000		181
EE4101	I42387		112	EK3022	II3541510000		183
EE4103	I74772	EE4115 (I92054)	112	EK3022	II3541512000		183
EE4103	T74772	EE4115 (I92054)	112	EK3022	II354156000		183
EE4104	I84866		112	EK3022	II354158000		181,192
EE4104	T84866	EE4104 (I84866)	112	EK3022	II354159000		183
EE4106	I79512		112	EK3023	II363978000		192
EE4106	II16096		112	EK3024	II3640412000		181
EE4107	I82646		112	EK3024	II3640415000		181
EE4107	K000745		112	EK3024	II3640423000		181
EE4113	I88478	EE4115 (I92054)	112	EK3025	I9725812000		181
EE4115	I92054		112	EK3025	I9725815000		181
EE4206	I76192	EE4206 (II16095)	112	EK3025	I972586000		181
EE4206	II16095		112	EK3027	II3358810000		183
EE4207	II36087		112	EK3027	II3358812000		183
EK3000	I9702110000		186	EK3027	II3358813000		183
EK3000	I9702112000		186	EK3027	II3358814000		183
EK3000	I9702115000		186	EK3027	II3358815000		183
EK3000	I970213000		186	EK3027	II335888000		181,192
EK3000	I970215000		186	EK3027	II335889000		183
EK3000	I970218000		186	EK3028	II3638710000		192
EK3001	II1563910000		186	EK3028	II3641712000		181
EK3001	II1563912000		186	EK3028	II3641714000		181
EK3001	II156393000		186	EK3029	II36388500		192
EK3001	II156395000		186	EK3029	II36418500		181
EK3001	II156396000		186	EK3030	II18181		187
EK3001	II156398000		186	EK3040	II3358712000		184
EK3003	II3541610000		188	EK3040	II335874000		184
EK3003	II3541612000		188	EK3040	II335875000		184
EK3003	II3541615000		188	EK3040	II335878000		182,192
EK3003	II354162000		188	EK3050	II354183000		185
EK3003	II354163000		188	EK3050	II354184000		185
EK3003	II354163500		188	EK3050	II354185000		185
EK3003	II354164000		188	EK3050	II354188000		183,194
EK3003	II354165000		188	EK3100	II367391		183
EK3003	II354166000		189	EK3100	II367393		183
EK3003	II354167000		189	EK3100	II367395		183
EK3003	II354168000		187,192	EK3100	II367396		183
EK3003	II354169000		189	EK3100	II367397		183
EK3010	I9725512000		185	EK3101	II367381		183
EK3010	I9725515000		185	EK3101	II367382		183
EK3010	I972553000		185	EK3108	II40391F2		185
EK3010	I972554000		185	EK3110	II3674112000		187
EK3010	I972555000		185	EK3110	II3674115000		187
EK3010	I972556000		185	EK3110	II367419000		187
EK3010	I972559000		185	EK3115	II3979310000		187
EK3011	II1415610000		185	EK3115	II397938000		187
EK3011	II1415612000		185	EK3120	II367541		185
EK3011	II141563000		185	EK3122	II397871		185
EK3011	II141564000		185	EK3122	II397872		185
EK3011	II141566000		185	EK3123	II397881		185

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.
EK3123	II397882		185
EK3123	II397883		185
EK3124	II397941		185
EK3124	II397942		185
EK3125	II397951		185
EK3125	II397952		185
EK3127	II39814F1		185
EK3130	II367563000		187
EK3130	II367564000		187
EK3130	II367565000		187
EK3130	II367566000		187
ES1006	I97256		174
ES1010	I97006		174
ES1040	II16773		174
ES1043	II17142		174
ES1080	II30223		174
ES1200	II14340		174
ES1210	II33581		174,192
ES1215	II33582		174,192
ES1216	II35419		174,192
ES2001	II36383		192,194
ES2002	II36384		192,194
ES2003	II36385		192,194
ES2005	II36413		177,188
ES2050	II36419		195
ES2050	II39798		195
ES2053	II39782		195
ES5004	I97026	0486000092000	179
ES5004	II16757	0486000092000	179
ES5010	I97253	ES5010 (II16761)	180
ES5010	II16761		180
ES5011	I97709	0265050140000	179
ES5011	II16762		180
ES5020	I98210	0265050148000	179,188
ES5020	II16763	0265050148000	179,188
ES5021	I98211	0265050150000	179
ES5021	II16764	0265050150000	179
ES5021	II16764004	0265050150000	179
ES5024	II37082		180
ES5060	II36394		180
ES5061	II36395		180
EWM2	I16438		112
EZ1000	II14841		187
EZ1010	II14840		187
EZ1020	II354343000		183,194
EZ1022	II36381		187,188,194
EZ1025	II36391		189
EZ1031	II39809F		187
EZ1032	II39812F		183
EZ1033	II39813F	EZ1033 (Z005464)	183
EZ1033	Z005464		183
EZ1034	II39808F		183
EZ1035	II39810F		187
FB11	I69434A		131
HB1110	I46381	HB1110 (I63724)	138
HB1110	I63724		138
HB1132	I71252	HB1132 (I86107)	138
HB1132	I86107		138
HB1133	I86108		138
HB1135	I71268		138
HB1136	I75804		138
HB1142	I82170		138
HB1143	I82171		138
HB1144	I82172		138
HB1147	I82174		138
HB1154	I76112		138

Type No.	Part No.	Replacement	Page No.
HB1154	I76121	HB1154 (I76112)	138
HB1154	I82842	HB1154 (I76112)	138
HB1157	I82890		138
HB1167	I92180		138
HB1168	I92181		138
HB1170	I75054	HB1170 (I92182)	138
HB1170	I92182		138
HB1172	I92183		138
HB1175	I76128	HB1175 (I92185)	138
HB1175	I92185		138
HB1176	I82175		138
HB1179	I76341	HB1179 (I92186)	138
HB1179	I92186		138
HB1180	I76342	HB1180 (I92187)	138
HB1180	I92187		138
HB1181	I76340	HB1181 (I92188)	138
HB1181	I92188		138
HB1189	I76767	HB1189 (I92190)	138
HB1189	I92190		138
HB1190	I76885	HB1190 (I92191)	138
HB1190	I92191		138
HB1201	I77888	HB1201 (I92194)	138
HB1201	I92194		138
HB1203	I77890	HB1203 (I92195)	138
HB1203	I92195		138
HB1204	I77891	HB1204 (I92196)	138
HB1204	I92196		138
HB1219	I81325	HB1219 (I92198)	138
HB1219	I92198		138
HB1241	I84644		138
HB1242	I85193		138
HB1258	I92030		138
HB1260	I89397		138
HB1261	I89398		138
HB1266	I97915		138
HB1267	I98746		139
HB1350	I82177		139
HB1354	I79498		139
HB1365	I94924		139
HB1500	I86656		139
KU1200	I60690	KU1200 (I88448)	160
KU1200	I88448		160
KU1303	I59070		160
KU1304	I59258	KU1304 (II33262)	160
KU1304	II33262		160
KU1305	I59259	KU1305 (II33263)	160
KU1305	II33263		160
KU1306	I59320		160
KU1307	I59321		160
KU1310	I76752	KU1310 (II17354)	160
KU1310	I84794	KU1310 (II17354)	160
KU1310	II17354		160
KU1310	SEB00066	KU1310 (II17354)	160
KU1310	SEB00225		160
KU1310	SEB01387	KU1310 (II17354)	160
KU1311	I67812	KU1311 (II17355)	160
KU1311	I76753	KU1311 (II17355)	160
KU1311	I767531	KU1311 (II17355)	160
KU1311	I84795	KU1311 (II17355)	160
KU1311	II17355		160
KU1311	SEB00071	KU1311 (II17355)	160
KU1311	SEB00226		160
KU1311	SEB01388	KU1311 (II17355)	160
KU1324	SEB00229		160
KU1400	II36178	KU1400 (K000067)	160
KU1400	K000067		160

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
KU1400	K000952		160	LA6205	I86647	LA8229 (II30443)	104
KU1401	II36179	KU1401 (K000174)	160	LA6205	I99614	LA8229 (II30443)	104
KU1401	K000174		160	LA6206	I87074	LA6228 (I94102)	103
KU1401	K000953		160	LA6207	I88502	LA8231 (II30445)	105
KU1410	II36180	KU1410 (K000068)	160	LA6207	I99615	LA8231 (II30445)	105
KU1410	K000068		160	LA6208	I87076		103
KU1410	K000954		160	LA6209	I87101	LA8233 (II30447)	105
KU1411	II36181		161	LA6210	I87501	LA8234 (II30448)	105
KU1411	K000173		161	LA6211	I87920	LA8235 (II30449)	105
KU1411	K000955		161	LA6211	I879201	LA8235 (II30449)	105
KU1412	K000079		161	LA6212	I88182	LA8207 (II19204)	104
KU1412	K000956		161	LA6213	I88183	LA8257 (II31478)	105
KU1413	K000172		161	LA6215	I89326	LA8242 (II30650)	105
KU1413	K000957		161	LA6217	I89776	LA8245 (II30810)	105
KU4108	I68990		161	LA6221	I92013	LA8207 (II19204)	104
KU4124	3660.0		161	LA6222	I92081		103
KU4124	3661.0		161	LA6225	I93139	LA8257 (II31478)	105
KU4124	I58101		161	LA6226	I93736	LA8212 (II19209)	104
KU4124	I71420		161	LA6227	I94027	LA8243 (II30651)	105
KU4124	SEB00227		161	LA6228	I94102		103
KU4124	SEB00436	KU4124 (3660.0)	161	LA6229	I94103	LA8257 (II31478)	105
KU4124	SEB00681	KU4124 (3660.0)	161	LA6232	I94754	LA8244 (II30652)	105
KU4124	SEB01389	KU4124 (3660.0)	161	LA6233	I94956		103
KU4127	I59031	KU4127 (I76874)	161	LA6240	I98036	LA8247 (II30812)	105
KU4127	I76874		161	LA6242	I98735	LA8220 (II19484)	104
KU4128	I59068		161	LA6243	I98736	LA8221 (II19485)	104
KU4128	I71421		161	LA6243	I98736RP	LA8221 (II19485)	104
KU4128	I86233	KU4128 (I59068)	161	LA6244	I98737	LA8222 (II19486)	104
KU4128	SEB00228		161	LA6247	I99723		103
KU4128	SEB00437	KU4128 (I59068)	161	LA6248	I98919	LA8206 (II19375)	104
KU4128	SEB00682	KU4128 (I59068)	161	LA6250	I89256	LA8250 (II31112)	105
KU4128	SEB00687		161	LA6251	I89257	LA8251 (II31113)	105
KU4128	SEB01390	KU4128 (I59068)	161	LA6252	I89258	LA8225 (II30179)	104
KU4128	SEB01446	KU4128 (I59068)	161	LA6253	I89259	LA8228 (II30185)	104
LA1100	I25513		108	LA6265	II19327	LA8202 (II19213)	104
LA2100	I13886		110	LA6266	II19328	LA8203 (II19214)	104
LA2100	T13886	LA2100 (I13886)	110	LA6267	II19329	LA8204 (II19215)	104
LA2103	I99660		110	LA6268	II19330	LA8205 (II19216)	104
LA2200	I42652	0457101001000	110	LA6269	II19325	LA8200 (II19211)	104
LA4103	I71532		108	LA6272	II19326	LA8201 (II19212)	104
LA4114	I82290		108	LA6273	II39748F		103
LA4115	I82291		109	LA6275	II33926	LA8267 (II33424)	105
LA4116	I90375		109	LA6277	II39867F		103
LA4117	I82293		109	LA6700	I85139		103
LA4118	I82387		109	LA6703	I87496		103
LA4119	I82388		109	LA6705	I89095	LA6709 (I98136)	103
LA4120	I82389		109	LA6709	I98136		103
LA4121	I83048		109	LA6710	II16149	LA6710 (II36935000)	103
LA4127	I84828	LA4127 (I90186)	109	LA6710	II36935	LA6710 (II36935000)	103
LA4127	I90186		109	LA6710	II36935000		103
LA4128	I89242		109	LA6711	II18755	LA6711 (II36936000)	103
LA4129	I85656		109	LA6711	II36936	LA6711 (II36936000)	103
LA4129	I92279	LA4129 (I85656)	109	LA6711	II36936000		103
LA4130	I86679		109	LA6730	I88772	LA6734 (II36933)	103
LA4131	I88036		109	LA6731	I88867	LA6735 (I98189)	103
LA4133	I92754		109	LA6734	I98188	LA6734 (II36933)	103
LA4134	I94649		109	LA6734	II36933		103
LA4135	I94650		109	LA6735	I98189		103
LA6003	I90081	LA8001 (II19332)	103	LA6736	II30808		103
LA6004	I93070	LA8002 (II19333)	103	LA8001	II19332		103
LA6005	I93632	LA8003 (II19334)	103	LA8002	II19333		103
LA6006	I93667	LA8004 (II19335)	103	LA8003	II19334		103
LA6010	II14295	LA8006 (II19337)	103	LA8004	II19335		103
LA6024	II19201	LA8015 (II19369)	103	LA8006	II19337		103
LA6200	I85133	LA8228 (II30185)	104	LA8007	II19338		103
LA6201	I92427	LA8219 (II19483000)	104	LA8008	II19362		103

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
LA8008	K000479		103	LA8209	II19206		104
LA8010	II19364		103	LA8210	II19207		104
LA8011	II19365	LA8011 (II37926)	103	LA8211	II19208		104
LA8011	II37926		103	LA8212	II19209		104
LA8012	II19366		103	LA8219	II19483000		104
LA8013	II19367		103	LA8220	II19484		104
LA8015	II19369		103	LA8221	II19485		104
LA8016	II19370	LA8016 (II37927)	103	LA8222	II19486		104
LA8016	II37927		103	LA8223	II30178		104
LA8017	II19371	LA8040 (II34976)	103	LA8224	II30182		104
LA8025	II19763		103	LA8225	II30179		104
LA8027	II30455		103	LA8226	II30180		104
LA8028	II30458		103	LA8227	II30181		104
LA8030	II30809		103	LA8228	II30185		104
LA8035	II32584		103	LA8229	II30443		104
LA8036	II32589		103	LA8230	II30444		104
LA8037	II33578		103	LA8231	II30445		105
LA8039	II33932	LA8041 (II37928)	103	LA8232	II30446		105
LA8040	II34976		103	LA8233	II30447		105
LA8041	II34977	LA8041 (II37928)	103	LA8234	II30448		105
LA8041	II37928		103	LA8235	II30449		105
LA8044	II35526		103	LA8236	II30450		105
LA8047	II37412		103	LA8237	II30451		105
LA8049	II37921	LA8059 (II38788F)	104	LA8239	II30657		105
LA8050	II37924		103	LA8242	II30650		105
LA8053	II37930		103	LA8243	II30651		105
LA8059	II38788F		104	LA8244	II30652		105
LA8060	II38798F		104	LA8245	II30810		105
LA8061	II39054F		104	LA8247	II30812		105
LA8062	II40133F		104	LA8250	II31112		105
LA8063	K000754		104	LA8251	II31113		105
LA8064	K000755		104	LA8252	II31118		105
LA8065	K001056		104	LA8253	II31119		105
LA8066	K001197		104	LA8256	II31477		105
LA8068	K002135		104	LA8257	II31478		105
LA8100	II37402	LA8124 (II40554F)	104	LA8259	II31481		105
LA8102	II37677	LA8125 (II40555F)	104	LA8263	II33929		105
LA8104	II38302F		104	LA8267	II33424		105
LA8105	II38303F		104	LA8269	II35522		105
LA8106	II38304F		104	LA8270	II35523		105
LA8107	II38305F		104	LA8271	II39751F		105
LA8108	II38610F	LA8126 (II40556F)	104	LA8272	II36257		105
LA8111	II38613F		104	LA8273	II36258		105
LA8113	II38615F	LA8128 (II40558F)	104	LA8275	II36653		105
LA8115	II38617F	LA8129 (II40559F)	104	LA8281	II36940		105
LA8116	II38620F		104	LA8283	II37662		105
LA8117	II38672F		104	LA8284	II37663		105
LA8124	II40554F		104	LA8286	II37715	LA8286 (II39752F)	105
LA8125	II40555F		104	LA8286	II39752F		105
LA8126	II40556F		104	LA8288	II39740F		105
LA8127	II40557F		104	LA8289	K000336		105
LA8128	II40558F		104	LA8700	II30184		105
LA8129	II40559F		104	LA8701	II39884F		105
LA8130	K000390		104	LA9000	II17366		105
LA8131	K000391		104	LA9001	II17369		105
LA8132	K000392		104	LA9002	II32581		105
LA8200	II19211		104	LA9003	II34982		105
LA8201	II19212		104	LA9004	II36007		105
LA8201	II19219	LA8201 (II19212)	104	LA9005	II36239		105
LA8202	II19213		104	LA9007	II31739		105
LA8203	II19214		104	LA9008	II37038		105
LA8204	II19215		104	LA9010	II38308F		105
LA8205	II19216		104	LA9011	II38309F		105
LA8206	II19375		104	LK1300	I77106		94
LA8207	II19204		104	LK1302	I78515		94
LA8208	II19205		104	LK1303	I78516		94

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
LK1305	I80549	LK1305 (I88783)	94	LK3857	SEB01813		96
LK1305	I88783		94	LK3859	K000854		96
LK1310	I87671		94	LK3859	SEB01841		96
LK1311	I86164		94	LK3867	K001728		96
LK1314	I87544		94	LK3902	I89873		96
LK1500	I77107		94	LK3904	I78976		96
LK1503	I78519		94	LK3908	I89875		96
LK1506	I88782		94	LK3910	I92089		96
LK1511	I83539		94	LK3914	I90573		96
LK1525	I92154		95	LK3927	I94064		96
LK1527	I88770		95	LK3930	II14786	LK3930 (II18606)	96
LK1532	I90401		95	LK3930	II18606		96
LK1534	I92972		95	LK3935	II14781	LK3935 (II19494)	96
LK1539	I93770		95	LK3935	II19494		96
LK1545	I98498		95	LK3941	II15998		96
LK1549	I99940		95	LK3941	II15998RP	LK3941 (II15998)	96
LK1554	SEB01149	LK1567 (SEB01686)	95	LK3947	II17252		96
LK1559	II17257		95	LK3947	K000740		96
LK1560	II17393		95	LK3954	II18602		96
LK1564	II32690		95	LK3955	II19065	LK3955 (II19495)	96
LK1566	II39151F		95	LK3955	II19495		96
LK1567	SEB01686		95	LK3959	II30892		96
LK1568	II39530F		95	LK3959	K000741		96
LK1571	K002161		95	LK3960	II30898		96
LK1802	I80864		95	LK3963	II31949		96
LK1808	I87904		95	LK3965	II33163		96
LK1813	II14570	LK1813 (II18355)	95	LK3966	II32223		96
LK1813	II18355		95	LK3970	II33509		96
LK1814	II14870	LK1814 (II18356)	95	LK3971	II33510		96
LK1814	II18356		95	LK3978	II36426	LP3982 (II40278F)	97
LK1900	I81156		95	LK3980	II36925		96
LK1901	I81089		95	LK3982	II37212	LK3982 (K000274000)	96
LK1907	I89303		95	LK3982	K000274	LK3982 (K000274000)	96
LK3501	I85051	LK3501 (I85051000)	95	LK3982	K000274000		96
LK3501	I85051000		95	LK3986	II37757		96
LK3508	I92840	LK3510 (I94066)	95	LK3986	K000275		96
LK3509	I93620	LK3509 (I93620000)	95	LK3994	SEB01842000		96
LK3509	I93620000		95	LK4910	II19497	LK4931 (II40277F)	99
LK3510	I94062	LK3510 (I94066)	95	LK4911	II30897	LK4931 (II40277F)	99
LK3510	I94066		95	LK4912	II35570	LK4931 (II40277F)	99
LK3517	II39521F		95	LK4913	II36424	LK4931 (II40277F)	99
LK3802	I85028		95	LK4913	II36424M1	LK4931 (II40277F)	99
LK3805	I83460		95	LK4918	II39077F	LK4918 (K000230000)	99
LK3810	I98499		95	LK4918	K000230	LK4918 (K000230000)	99
LK3813	I94314000		95	LK4918	K000230000		99
LK3826	II34069		95	LK4918	K001267000		99
LK3830	II36423		95	LK4919	II39078F	LK4919 (K000231000)	99
LK3832	II37220		95	LK4919	K000231	LK4919 (K000231000)	99
LK3833	SEB01586		95	LK4919	K000231000		99
LK3834	SEB01597		95	LK4920	K000232		99
LK3835	SEB01599		95	LK4921	K000233	LK4921 (K000233000)	99
LK3836	SEB01601		95	LK4921	K000233000		99
LK3837	SEB01602		95	LK4921	K001268000		99
LK3838	SEB01603		95	LK4927	II39523F		99
LK3839	K000853		95	LK4931	II40277F		99
LK3839	SEB01604		95	LK4935	K000839		99
LK3840	SEB01605		95	LK4935	K001207		99
LK3840	SEB01819		95	LP1119	I60224		96
LK3841	SEB01606000		95	LP1120	I83985		97
LK3845	II38683F		95	LP1154	I42309		96
LK3846	K000861		95	LP1157	I67047		96
LK3846	SEB01817		95	LP1158	II19193		97
LK3850	SEB01768		95	LP1316	I75516	LK1300 (I77106)	94
LK3853	SEB01759		95	LP1325	I75222	LP1325 (II40265F)	96
LK3854	SEB01816		95	LP1325	II40265F		96
LK3855	SEB01805		95	LP1330	I76334	LK1305 (I88783)	94

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
LP1333	I77568		96	LP4852	SEB01588		100
LP1525	I54075		96	LP4855	SEB01747		100
LP1529	I75551	LK1500 (I77107)	94	LP4857	K000821		100
LP1550	I11443		96	LP4858	K001095		100
LP1550	II39152F		97	LP4914	I73832	LK4921 (K000233000)	99
LP1567	I97363		96	LP4919	I76766		100
LP1574	I75547	LK1503 (I78519)	94	LP4921	I81946		100
LP1577	II40280F		96	LP4921	II14785	LP4921 (I81946)	100
LP1585	I78141		96	LP4921	II39080F	LK4921 (K000233000)	99
LP1588	I80239		96	LP4924	I87734		100
LP1596	SEB00416		96	LP4930	II15698	LP4974 (K000236000)	100
LP1806	I75566		97	LP4930	II15698000	LP4974 (K000236000)	100
LP1828	I58889		96	LP4934	II15992	LP4934 (II15992000)	100
LP1946	I75987		97	LP4934	II15992000		100
LP1949	I75988		96	LP4934	II30895		100
LP1950	I71042		96	LP4936	II16243		100
LP1959	I80214	LK1901 (I81089)	95	LP4937	II16417		100
LP1969	I60966		96	LP4939	SEB01154		100
LP1974	I75658	LK1900 (I81156)	95	LP4940	SEB01155		100
LP1992	I73584		96	LP4941	SEB01156		100
LP2950	I11482		99	LP4942	SEB01157		100
LP2982	I79195		99	LP4943	SEB01158		100
LP2983	I83843		99	LP4944	SEB01159		100
LP3832	SEB00348		96	LP4945	SEB01160		100
LP3842	I83032		96	LP4955	II31730		100
LP3848	I88787	LK3805 (I83460)	95	LP4957	II17395000		100
LP3852	SEB00650		96	LP4957	K002045000		100
LP3860	SEB01151		97	LP4960	II30899		100
LP3861	SEB01152		97	LP4960	K000237	LP4960 (II30899)	100
LP3940	II14385F		97	LP4960	K000237000		100
LP3947	I76069	LK3904 (I78976)	96	LP4961	II30900		100
LP3966	II37962		97	LP4962	II31955		100
LP3970	SEB01795000		97	LP4963	II32686		100
LP3975	II39522F		97	LP4964	II32687000		100
LP3982	II40278F		97	LP4964	K002046		100
LP3993	K001611		97	LP4965	II32688		100
LP4812	I86909	LP4812 (I86909000)	99	LP4965	K002047		100
LP4812	I86909000		99	LP4967	II33164	LP4967 (II33164000)	100
LP4813	I90499	LP4813 (I90499000)	99	LP4967	II33164000		100
LP4813	I90499000		99	LP4968	II33514000		100
LP4813	I90499V	LP4813 (I90499000)	99	LP4970	II34405		100
LP4814	I97492		99	LP4974	II37214	LP4974 (K000236000)	100
LP4815	I97493		99	LP4974	II37214000	LP4974 (K000236000)	100
LP4818	SEB00820		99	LP4974	K000236	LP4974 (K000236000)	100
LP4819	SEB00836	LP4845 (SEB01455000)	99	LP4974	K000236000		100
LP4819	SEB01441	LP4845 (SEB01455000)	99	LP4975	II37215	LP4975 (II37365)	100
LP4823	SEB01782		99	LP4975	II37365		100
LP4825	II15993	LP4825 (II15993000)	99	LP4977	II37369		100
LP4825	II15993000		99	LP4981	II37437		100
LP4827	SEB01452	LP4845 (SEB01455000)	99	LP4983	SEB01784		100
LP4830	II34841	LP4830 (SEB01781)	99	LP4984	SEB01783000		100
LP4830	SEB01781		99	LP4985	K000229	LP4985 (K000229000)	100
LP4832	SEB01245		99	LP4985	K000229000		100
LP4833	SEB01485		99	LP4991	II38776F		100
LP4838	SEB01496		99	LP4992	II38777F		100
LP4840	SEB01472		99	LP4992	K000235		100
LP4842	II30901		99	LP4993	II38779F	LK4918 (K000230000)	99
LP4843	SEB01430		99	LP4999	SEB01676		100
LP4844	II32842		99	MB1200	I27644	MB1200 (I72775)	132
LP4845	SEB01455	LP4845 (SEB01455000)	99	MB1200	I72775		132
LP4845	SEB01455000		99	MB1201	I13716	MB1201 (I72776)	132
LP4846	SEB01478		99	MB1201	I72776		132
LP4849	SEB01480		100	MB1211	I83692		132
LP4850	II35564	LP4850 (II35564000)	100	MB1220	I73207	MB1220 (I73207A)	132
LP4850	II35564000		100	MB1220	I73207A		132
LP4851	SEB01545		100	MB1222	I79513		132

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
MB1223	I77905		132	MB4806	II16692		133
MB1224	I88650		132	MB4811	II18787		133
MB1226	II16361		132	MB4812	II18788		133
MB4415	I81796		132	MB4813	II19088	MB4813 (II36364)	133
MB4419	I55719		132	MB4813	II36364		133
MB4427	I67226		132	MB4814	II19089	MB4814 (II36365)	133
MB4428	I55724		132	MB4814	II36365		133
MB4434	I68911	MB4434 (II32091)	132	MB4815	II19090		133
MB4434	II32091		132	MB4815	II36302		133
MB4436	I82111		132	MB4819	II36074		133
MB4510	I72791		132	MB4820	II30848	MB4820 (II36300)	133
MB4512	I55727		132	MB4820	II36300		133
MB4514	I72780		132	MB4821	II36299		133
MB4518	I83874		132	MB4825	II35372		133
MB4523	I74054		132	MB4828	II35375		133
MB4611	SEB00480		132	MB4833	II36293		133
MB4611	SEB01098		132	MB4835	II36295		133
MB4613	SEB01145		132	MB4836	II36296		133
MB4614	SEB01343		132	MB4837	II36297		133
MB4630	I74907		132	MB4838	II36298		133
MB4630	I76624	MB4630 (I74907)	132	MB4841	II36301		133
MB4631	I76410		132	MB4846	II36096		133
MB4636	I81712		132	MB4847	II36120	MB4849 (II36174000)	133
MB4643	I93304		132	MB4847	II36120000	MB4849 (II36174000)	133
MB4644	I84433	0481064103000	129	MB4849	II36174	MB4849 (II36174000)	133
MB4648	I87565	MB4648 (I97388)	132	MB4849	II36174000		133
MB4648	I97388		132	MB4850	K000014		133
MB4653	I83641		132	MB4851	K000238		133
MB4654	I83642		132	MB7103	I27712		133
MB4656	I89386	0481064211000	130	MB7107	I77633		133
MB4657	I89387		132	MB9000	II37181		195
MB4658	I92238		132	RE1105	I46365		148
MB4661	I93189		132	RE1105	T46365	RE1105 (I46365)	148
MB4665	SEB00683		132	RE1110	I76792		148
MB4665	SEB01481		132	RE1115	I76204		148
MB4673	I90360	0481064210000	130	RE1115	I76627	RE1115 (I76204)	148
MB4673	I90360RP	MB4803 (II16537)	133	RE1115	II36078		148
MB4674	I90361	MB4804 (II16538)	133	RE1119	I68206		148
MB4676	I84103		132	RE1121	I76202		148
MB4681	I85209	0481064110000	129	RE1126	I77762		148
MB4684	I93234	MB4806 (II16692)	133	RE1129	I81800		148
MB4690	I99719	MB4849 (II36174000)	133	RE1131	I85168		148
MB4690	I99719000	MB4849 (II36174000)	133	RE1132	I86017		148
MB4691	SEB00631		132	RE1141	II16468		148
MB4694	II14119	MB4694 (II36045)	132	RE1147	II36085		148
MB4694	II36045		132	RE2102	I59456		149
MB4697	SEB01120		132	RE2108	I70676		149
MB4699	SEB01205		132	RE2111	I71988		149
MB4710	I74971		133	RE2113	I74908		149
MB4711	I74972		133	RE2117	I82697000		149
MB4712	I74789		133	RE2117	II18037	RE2117 (I82697000)	149
MB4745	I89741		133	RE2117	II18037000		150
MB4747	I89742		133	RE2118	I92200		150
MB4753	II15741		133	RE2130	II36015		150
MB4754	II16472		133	RE2130	II36016	RE2130 (II36015)	150
MB4754	II164721	MB4754 (II16472)	133	RE2131	II36017		150
MB4760	II33920		133	RE2131	II36018	RE2131 (II36017)	150
MB4761	II34754		133	RE2220	I61349		148
MB4762	II36058		133	RE2221	I63354		148
MB4763	II36060		133	RE2221	T63354	RE2221 (I63354)	148
MB4765	II36092		133	RE2223	I76938	RE2221 (I63354)	148
MB4800	II16465		133	RE2224	I77763		148
MB4801	II16466	MB4811 (II18787)	133	RE2225	I78406		148
MB4803	II16537		133	RE2230	II34747		148
MB4804	II16538		133	RE2504	I46366		148
MB4805	II16539		133	RE3310	SEB01100		148

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
RE3312	II39050F		148	SN6567RC	K003792		243
SB6400RC	K002874		242	SN6568RC	K003794		243
SB6401RC	K002923		242	SN7185RC	K003781		243
SB6403RC	K002915		242	SN7186RC	K003783		243
SB6404RC	K002878		242	SN7187RC	K003785		243
SB6408RC	K002919		242	SN7188RC	K003787		243
SB6410RC	K002875		242	SN7189RC	K003795		243
SB6411RC	K002924		242	SN7195RC	K003782		243
SB6413RC	K002916		242	SN7196RC	K003784		243
SB6414RC	K002879		242	SN7197RC	K003786		243
SB6418RC	K002920		242	SN7198RC	K003788		243
SB7405RC	K002759		242	SN7199RC	K003796		243
SB7408RC	K002783		242	SN7200RC	K003797		243
SB7409RC	K002785		242	SN7201RC	K003799		243
SB7415RC	K002760		242	SN7202RC	K003801		243
SB7418RC	K002784		242	SN7203RC	K003803		243
SB7419RC	K002786		242	SN7204RC	K003805		243
SB7420RC	K002793		242	SN7205RC	K003807		243
SB7421RC	K002789		242	SN7206RC	K003809		243
SB7423RC	K003386		242	SN7207RC	K003811		243
SB7430RC	K002794		242	SN7208RC	K003813		243
SB7431RC	K002790		242	SN7209RC	K003815		243
SB7433RC	K003387		242	SN7210RC	K003798		243
SB7450RC	K002962		242	SN7211RC	K003800		243
SB7451RC	K002964		242	SN7212RC	K003802		243
SB7452RC	K002966		242	SN7213RC	K003804		243
SB7453RC	K002968		242	SN7214RC	K003806		243
SB7455RC	K003192		242	SN7215RC	K003808		243
SB7460RC	K002963		242	SN7216RC	K003810		243
SB7461RC	K002965		242	SN7217RC	K003812		243
SB7462RC	K002967		242	SN7218RC	K003814		243
SB7463RC	K002969		242	SN7219RC	K003816		243
SB7465RC	K003193		242	SN7241RC	K004578		243
SF1	1406643		273	SN7242RC	K004580		243
SF10	1408320		273	SN7251RC	K004579		243
SF11	1408387		273	SN7252RC	K004581		243
SF13	1408824		273	SV1200	I90706		259
SF17	1409284		273	SV1201	I90707		259
SF18	1409285		273	SV1202	I90708		259
SF20	1409287		273	SV1211	I47823	SV1307 (I87823)	259
SF21	1409570		273	SV1219	I41333		259
SF23	1409870		273	SV1219	T41333	SV1219 (I41333)	259
SF3	1407023		273	SV1219	T47852	SV1219 (I41333)	259
SF30	1420362		273	SV1223	I72507	SV1200 (I90706)	259
SF34	1420879		273	SV1260	I83699		259
SF38	1422149		273	SV1261	I58921		259
SF42	1422762		273	SV1261	I61751	SV1261 (I58921)	259
SF43	1424107		273	SV1261	T58921	SV1261 (I58921)	259
SF44	1424371		273	SV1261	T61751	SV1261 (I58921)	259
SF7	1407631		273	SV1269	I80086		259
SF8	1407704		273	SV1279	I83828		259
SIV100K	I73623		253	SV1280	I69324		259
SIV-10K	I67981		253	SV1280	I80093		259
SIV10L	I85830		253	SV1281	I80095		259
SN5005RC	K004570		242	SV1287	I72870	SV1287 (I85247)	259
SN5006RC	K004572		242	SV1287	I85247		259
SN5015RC	K004571		242	SV1288	I76014	SV1288 (II17813)	259
SN5016RC	K004573		242	SV1288	II17813		259
SN6573RC	K003779		242	SV1289	I76269	SV1294 (I80091)	259
SN6554RC	K003789		242	SV1290	I76270	SV1294 (I80091)	259
SN6555RC	K003825		242	SV1291	I76271	SV1294 (I80091)	259
SN6557RC	K003791		242	SV1292	I76272	SV1294 (I80091)	259
SN6558RC	K003793		242	SV1294	I80091		259
SN6563RC	K003780		242	SV1295	I76275	SV1295 (I85698)	259
SN6564RC	K003790		242	SV1295	I85698		259
SN6565RC	K003826		242	SV1296	I83640		259

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
SV1298	I85443	SV1298 (II33045)	259	SV1399	II30525000		260
SV1298	II33045		259	SV1403	I98348		260
SV1299	I85444	SV1299 (II33046)	259	SV1404	I98349		260
SV1299	II33046		259	SV1410	I98289		260
SV1303	I78418	SV1303 (II32763)	259	SV1411	I98290		260
SV1303	II32763		259	SV1412	I98292000		260
SV1304	I79054	SV1304 (I85919)	259	SV1412	K000073		260
SV1304	I85919		259	SV1416	I99630		260
SV1307	I87823		259	SV1417	I99631		260
SV1307	I90631	SV1307 (I87823)	259	SV1418	I99633		260
SV1307	II36042	SV1455 (II36056)	261	SV1419	II14888	SV1419 (II17812)	260
SV1310	I82456		259	SV1419	II17812		260
SV1313	I83008	SV1313 (II17817)	259	SV1421	II15729		260
SV1313	II17817		259	SV1422	II15730		260
SV1318	I85883		259	SV1425	II16189		260
SV1318	II36108		259	SV1426	II16190		260
SV1321	I85884	SV1321 (II18034)	259	SV1427	II16191	SV1427 (II17810)	260
SV1321	II18034		259	SV1427	II17810		260
SV1323	I84808	SV1323 (II32764)	259	SV1430	II16194	SV1430 (II17811)	260
SV1323	II18503	SV1323 (II32764)	259	SV1430	II17811		260
SV1323	II32764		259	SV1435	II19085		260
SV1325	I85672	SV1325 (II18033)	259	SV1436	II19086		260
SV1325	II18033		259	SV1437	II19087		260
SV1325	II18033B	SV1325 (II18033)	259	SV1440	II30530		260
SV1328	I86030	SV1328 (II32765)	260	SV1441	II30531		261
SV1328	II32765		260	SV1442	II32788		261
SV1329	I92103		260	SV1443	II32789		261
SV1330	I92104		260	SV1445	II34439		261
SV1333	I86887		260	SV1447	II34910		261
SV1334	I86888		260	SV1455	II36056		261
SV1343	I87432		260	SV1460	II36088		261
SV1344	I87433		260	SV1461	II36030	SV1465 (II36114)	261
SV1345	I87811	SV1345 (II17814)	260	SV1461	II36101		261
SV1345	II17814		260	SV1461	II36141		261
SV1350	I87950		260	SV1463	II36099	SV1466 (II36115)	261
SV1351	I88579		260	SV1463	II36100	SV1466 (II36115)	261
SV1352	I88675	SV1352 (II18035)	260	SV1463	II36142	SV1466 (II36115)	261
SV1352	I89719	SV1352 (II18035)	260	SV1465	II36114		261
SV1352	II18035		260	SV1466	II36115		261
SV1361	I90452		260	SV1467	II36117		261
SV1362	I90453	SV1362 (II18032)	260	SV1468	II36118		261
SV1362	II18032		260	SV1468	K000069		261
SV1369	I92567		260	SV1470	II36121		261
SV1369	I92612	SV1369 (I92567)	260	SV1471	II36122	SV1307 (I87823)	259
SV1370	I92568		260	SV1472	II36123		261
SV1370	I92613	SV1370 (I92568)	260	SV1481	II36169		261
SV1371	I92715		260	SV1482	II36171		261
SV1372	I92952		260	SV1485	K000367		261
SV1374	I92995		260	SV1485	K002647		261
SV1376	I93422		260	SV1486	K001034		261
SV1377	I93497		260	SV1487	K001035		261
SV1377	I93507	SV1377 (I93497)	260	SV1490	K000264		261
SV1378	I93498		260	SV1491	K000661		261
SV1378	I93508	SV1378 (I93498)	260	SV3111	I73100	SV3111 (I83153)	262
SV1380	I93424	SV1380 (II36026)	260	SV3111	I83153		262
SV1380	II36026		260	SV3113	I86022		262
SV1381	I93425	SV1381 (II36027)	260	SV3114	I86023		262
SV1381	II36027		260	SV3115	I86024		262
SV1384	I93512		260	SV3118	I86025		262
SV1385	I93510	SV1385 (II17815)	260	SV3125	SEB00411	SV3111 (I83153)	262
SV1385	II17815		260	SV3128	SEB00535	SV3115 (I86024)	262
SV1395	I94616		260	SV3130	I90969		262
SV1395	II19425		260	SV3133	II30532	SV3133 (II36043)	262
SV1395	K000001		260	SV3133	II36043		262
SV1399	I94622		260	SV3156	I92723		263
SV1399	II30525	SV1399 (I94622)	260	SV3157	I92700		263

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.	Type No.	Part No.	Replacement	Page No.
SV3158	I92737		263	SZ1808	I80076		227
SV3161	II36069		262	SZ1817	I77897		227
SV3162	II36075		262	SZ1817	II36375		227
SV3163	II36076		262	SZ3500	I79165		227
SV3164	II36107		262	T3700-D	131.767	T3700-D (131.791)	241
SV3200	II36145		262	T3700-D	131.791		241
SV3204	II36185		262	T3700-I	131.766	T3700-I (131.790)	241
SV3230	II36151		262	T3700-I	131.790		241
SV3240	II36225		262	T4300-D	131.721	T4300-D (131.777)	241
SV3241	II36226		262	T4300-D	131.775	T4300-D (131.777)	241
SV3242	II36241		262	T4300-D	131.777		241
SV3243	II36243		262	T4300-I	131.720	T4300-I (131.776)	241
SV3260	II36152		262	T4300-I	131.774	T4300-I (131.776)	241
SV3263	II36198	SV3273 (II36227)	262	T4300-I	131.776		241
SV3273	II36227		262	VG3156	I87755		273
SV3293	II36205		262	VG3160	I50486		273
SV3293	K002020		262	VG3200	I83280	VG3200 (I93581)	273
SV3302	I85043		278	VG3200	I93581		273
SV3360	I79678		278	VG3204	I83345	VG3204 (I93582)	273
SV3361	I73422	SV3371 (I90498)	278	VG3204	I93582		273
SV3367	I76936		278	VG3208	I88094		273
SV3368	I87538		278	VG3211	I93585		273
SV3370	I87380	SV3371 (I90498)	278	VG3213	I92489		273
SV3371	I90498		278	VG3215	I94658	VG3215 (II34814)	273
SV5210	I67661		158	VG3215	II17772	VG3215 (II34814)	273
SV5214	I76452	SV5214 (I764521)	158	VG3215	II34814		273
SV5214	I764521		158	VG3217	I92977	VG3217 (II34816)	274
SZ1100	I22772		281	VG3217	II34816		274
SZ1104	I43069		281	VG3218	I93083		274
SZ1114	I58949	SZ1161 (I90948)	281	VG3221	I97142		274
SZ1115	I58893		281	VG3224	I98153		274
SZ1117	I63748		281	VG3227	II17163	VG3227 (II34815)	274
SZ1119	I69478		281	VG3227	II19607	VG3227 (II34815)	274
SZ1130	I74963	SZ1161 (I90948)	281	VG3227	II34815		274
SZ1136	I76647		281	VG3228	II14193		274
SZ1144	I81616		281	VG3229	II14194		274
SZ1145	I83151	SZ1161 (I90948)	281	VG3231	II14297	VG3227 (II34815)	274
SZ1152	I87236		281	VG3231	II34817	VG3227 (II34815)	274
SZ1156	I89463		281	VG3234	II17166		274
SZ1159	I85564		281	VG3238	II19612		274
SZ1161	I90948		281	VG3261	II17464	VG3261 (II31733)	274
SZ1164	I93265		281	VG3261	II31733		274
SZ1165	I94189		281	VG3262	II17767		274
SZ1166	I94326		281	VG3264	II35696		274
SZ1180	II30128		281	VG3265	II36373		274
SZ1182	II37949		281	VG3267	II36377		274
SZ1190	II32920		281	VG3268	II37933		274
SZ1200	I41276		281	VG3269	II36379		274
SZ1208	I71779		281	VG3275	II37950		274
SZ1213	I79042		281	VG3276	II40096F		274
SZ1223	I84269		281	VG3282	II40381F		274
SZ1300	I15544	0482016003000	280	VG3283	K000411		274
SZ1306	I74164		227	VG3284	K000511		274
SZ1308	I75336		227	VG3285	II17770		274
SZ1311	SEB00177		281	VG3285	K001071		274
SZ1317	II32921		227	VG3304	I88261	VG3304 (I93583)	274
SZ1318	II35695		227	VG3304	I93583		274
SZ1319	II36378		227	VG3306	I89848	VG3306 (I93584)	274
SZ1512	I84626		227	VG3306	I93584		274
SZ1602	I34514		227	VG3310	SEB00694	VG3310 (SEB01707)	274
SZ1605	I40719		227	VG3310	SEB01707		274
SZ1611	I66577		227	VG3361	II14195		274
SZ1615	I75749		227	VG3364	II17771		274
SZ1704	I75226		227	VG3365	II37940		274
SZ1750	I75053		227	VG8125	I87819		274
SZ1806	I50993		227	VG8130	I92252		274

Product Numbers in Type Number order

Type No.	Part No.	Replacement	Page No.
WE2131	I71206		252
WE2135	I94846		252
WE2137	II14936		252
WE2207	I92570		252
WHEV-1/1	I69739		170
WHV-6	I30062		170
WHV-9	I30064		171
WV-10/1	I69685		164
ZB1110	I93024	ZB1110 (I97266)	246
ZB1110	I97266		246
ZB1209	I34362		254
ZB1217	I77259		254
ZB1218	SEB00253		254
ZB1219	SEB00254		254
ZB1220	SEB00255		254
ZB3104	I43874		255
ZB3108	I71613		255
ZB3150	I78074		250
ZB3163	I92999		250
ZB4187	I60312		101
ZB4224	I66849		101
ZB4225	I66994		101
ZB4233	I88477		101
ZB4257	I79016	ZB4275 (I88057)	101
ZB4275	I88057		101
ZB4289	II40284F		101
ZB4504	II17787	ZB4511 (II35530)	107
ZB4505	II17788	ZB4512 (II35531)	107
ZB4506	II32582		107
ZB4511	II35530		107
ZB4512	II35531		107
ZB4513	II36006	ZB4564 (II39866F)	107
ZB4522	II37664	ZB4586 (K001446)	107
ZB4524	II37666		107
ZB4524	II37666M2	ZB4524 (II37666)	107
ZB4525	II37667		107
ZB4526	II37668		107
ZB4526	II37668M2	ZB4526 (II37668)	107
ZB4527	II37669		107
ZB4530	II37627M3	ZB4587 (K001447)	107
ZB4530	II37672	ZB4587 (K001447)	107
ZB4530	II37672M3	ZB4587 (K001447)	107
ZB4534	II38310F		107
ZB4535	II38311F		107
ZB4537	II38313F	ZB4588 (K001448)	107
ZB4539	II38315F	ZB4589 (K001449)	107
ZB4541	II38317F	ZB4590 (K001450)	107
ZB4543	II38319F	ZB4591 (K001453)	107
ZB4544	II38619F		107
ZB4545	II38005F		107
ZB4546	II38744F	ZB4593 (K001455)	107
ZB4548	II38799F		107
ZB4550	II39018F	ZB4592 (K001454)	107
ZB4553	II39052F	ZB4594 (K001456)	107
ZB4556	II39121F	ZB4595 (K001457)	107
ZB4557	II39122F	ZB4596 (K001458)	107
ZB4558	II39123F	ZB4597 (K001459)	107
ZB4564	II39866F		107
ZB4566	II40542F	ZB4586 (K001446)	107
ZB4567	II40543F	ZB4587 (K001447)	107
ZB4568	II40544F	ZB4588 (K001448)	107
ZB4569	II40545F	ZB4589 (K001449)	107
ZB4570	II40546F	ZB4590 (K001450)	107
ZB4571	II40547F	ZB4591 (K001453)	107
ZB4572	II40548F	ZB4593 (K001455)	107
ZB4573	II40549F	ZB4592 (K001454)	107

Type No.	Part No.	Replacement	Page No.
ZB4574	II40550F	ZB4594 (K001456)	107
ZB4575	II40551F	ZB4595 (K001457)	107
ZB4576	II40552F	ZB4596 (K001458)	107
ZB4577	II40553F	ZB4597 (K001459)	107
ZB4578	K000394		107
ZB4579	K000395		107
ZB4580	K000396		107
ZB4586	K001446		107
ZB4587	K001447		107
ZB4588	K001448		107
ZB4589	K001449		107
ZB4590	K001450		107
ZB4591	K001453		107
ZB4592	K001454		107
ZB4593	K001455		107
ZB4594	K001456		107
ZB4595	K001457		107
ZB4596	K001458		107
ZB4597	K001459		107
ZB9005	I83852	0265152004000	177
ZB9022	I98892	EK3030 (II18181)	187
ZB9032	II37951004		246
ZB9036	K000469		246











1. Compressors



1.1 Single Cylinder Compressors

Key:

- A Air cooled
- B Base mounted
- E Uses engine oil
- ESS With Energy Saving System
- F Flange mounted
- S Uses own oil
- T Through drive
- VP Water cooled Valve Plate
- W Water cooled
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes			Volume [cm³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
1011032000	-		G3/8" J	-	-	90		B,S,A
1013200000	-		2)	2)	-	192		F,E,W
1186502	-	1	3/4" NPTF	3/8" NPTF	-	150		F,T,E,W
1186616	-	2	3/4" NPTF	3/8" NPTF	-	250		F,T,E,W
1189100	-	1	3/4" NPTF	3/8" NPTF	-	150		F,T,E,W
1189439	-		3/4" NPTF	3/8" NPTF	-	150		F,T,E,W
1189495	-	1	3/4" NPTF	1/2" NPTF	1/8" NPTF	250		F,T,E,W
1189497	-	1	M26x1,5	1/2" NPTF	-	150		F,T,E,W
1189498	-	1	M26x1,5	1/2" NPTF	1/8" NPTF	150		F,T,E,W
1189499	-		M26x1,5	1/2" NPTF	1/8" NPTF	250		F,T,E,W
1189500	-	1	M26x1,5	1/2" NPTF	1/8" NPTF	250		F,T,E,W
1194189	-		M26x1,5	-	-	150		F,T,E,A
1194215	-	1	3/4" NPTF	3/8" NPTF	-	250		F,T,E,W
AC56AG	-	1	M24x1,5	M16x1,5	-	272	8,0	F,E,W
AC62ZAG	-		M24x1,5	M16x1,5	-	165	10,0	B,E,W
AC63ZAG	-	1	M24x1,5	M16x1,5	-	192	10,0	F,E,W
AC63ZBG	-	1	M24x1,5	M16x1,5	-	192	10,0	F,E,W
AC64ZCG	-		M24x1,5	M16x1,5	-	170	10,0	F,E,W
AC64ZDG	-	1	M24x1,5	M16x1,5	-	170	10,0	F,E,W
AC67AZG	-	1	M26x1,5	M16x1,5	-	250	11,0	F,T,E,W
ACX61ZAG	-	1	M24x1,5	M16x1,5	-	165	11,0	B,E,W
ACX61ZCG	-	1	M24x1,5	M16x1,5	-	165	11,0	B,E,W
ACX66BG	-	1	M24x1,5	M16x1,5	-	192	11,0	B,E,W
ACX67AAG	-	1	M26x1,5	M16x1,5	-	250	11,0	F,E,W
ACX67BAG	-	1	M26x1,5	M16x1,5	-	250	11,0	F,T,E,W
ACX68D	-	1	M26x1,5	M16x1,5	-	165	12,5	F,E,W
ACX69D	-	1	M26x1,5	M16x1,5	-	250	12,5	F,E,W
ACX69DX	-	1	M26x1,5	M16x1,5	-	250	12,5	F,T,E,W
KZ1114/1	-	1	1/2" NPTF	-	1/8" NPTF	150		F,T,E,A
KZ1115/2	-		1/2" NPTF	1/2" NPTF	1/8" NPTF	150		F,T,E,W
KZ1143/1	-	1	1/2" NPTF	3/8" NPTF	1/8" NPTF	250		F,T,E,W
KZ1143/4	-	1	1/2" NPTF	3/8" NPTF	1/8" NPTF	250		F,T,E,W
KZ1257/3	-	1	3/4" NPTF	1/2" NPTF	-	250		F,T,E,W
KZ1265/1	-		1/2" NPTF	1/2" NPTF	-	250		B,E,W
KZ1265/2	-	3	1/2" NPTF	1/2" NPTF	1/8" NPTF	250		B,E,W
KZ800/4	-	4	3/8" NPTF	-	1/8" NPTF	146		F,E,A
KZ801/4	-	4	3/8" NPTF	-	1/8" NPTF	146		F,T,E,A
KZ802/5XU	-	5	1/2" NPTF	3/8" NPTF	1/8" NPTF	215		F,E,W
KZ803/5	-	5	1/2" NPTF	3/8" NPTF	1/8" NPTF	215		F,T,E,W
I77106	LK1300	6	M26x1,5	-	-	110	10,0	B,E,A
I78515	LK1302	6	M26x1,5	-	-	110	10,0	B,E,A
I78516	LK1303	6	M26x1,5	-	-	110	10,0	B,E,A
I88783	LK1305	6	M26x1,5	-	-	110	16,0	B,E,A
I87671	LK1310	7	M26x1,5	-	-	110	10,0	F,T,E,A
I86164	LK1311	6	M26x1,5	-	-	110	10,0	B,E,A
I87544	LK1314	6	M26x1,5	-	-	110	10,0	B,E,A
I77107	LK1500	6	M26x1,5	-	-	150	10,0	B,E,A
I78519	LK1503	6	M26x1,5	-	-	150	19,0	B,E,A
I88782	LK1506	8	M26x1,5	-	-	150	16,0	B,T,E,A
I83539	LK1511	8	M26x1,5	-	-	150	10,0	B,E,A

Part Number	Type No.	Fig.	Port Sizes			Volume [cm³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
I92154	LK1525	9	M26x1,5	-	-	150	10,0	F,T,E,A ¹⁾
I88770	LK1527	8	M26x1,5	-	-	150	10,0	B,E,A
I90401	LK1532	8	M26x1,5	-	-	150	10,0	B,E,A
I92972	LK1534	6	M26x1,5	-	-	150	10,0	B,E,A
I93770	LK1539	9	M26x1,5	-	-	150	10,0	F,T,E,A ¹⁾
I98498	LK1545	6	M26x1,5	-	-	150	19,0	B,E,A
I99940	LK1549	9	M26x1,5	-	-	150	10,0	B,E,A
II17257	LK1559	6	M26x1,5	-	-	150	19,0	B,E,A
II17393	LK1560	6	M26x1,5	-	-	150	19,0	B,E,A
II32690	LK1564		M26x1,5	-	-	150	10,0	F,E,A
II39151F	LK1566		M26x1,5	-	-	150	10,0	B,T,E,A
SEB01686	LK1567		M26x1,5	-	-	150	10,0	F,T,E,A
II39530F	LK1568	6	M26x1,5	-	-	150	10,0	B,E,A
K002161	LK1571	6	M26x1,5	-	-	150	10,0	B,E,A
I80864	LK1802	8	M26x1,5	-	-	225	10,0	B,E,A ²⁾
I87904	LK1808	8	M26x1,5	-	-	225	10,0	B,E,A ²⁾
II18355	LK1813	10	M26x1,5	-	-	225	10,0	B,T,E,A
II18356	LK1814	10	M26x1,5	-	-	225	10,0	B,E,A
I81156	LK1900	6	M26x1,5	-	-	300	10,0	B,E,A
I81089	LK1901	6	M26x1,5	-	-	300	10,0	B,E,A
I89303	LK1907	6	M26x1,5	-	-	300	10,0	B,E,A
I85051000	LK3501	11	M26x1,5	M18x1,5	-	150	12,5	F,E,VP
I93620000	LK3509	11	M26x1,5	M22x1,5	-	150	10,0	F,E,VP
I94066	LK3510	11	M26x1,5	M22x1,5	-	150	12,5	F,E,W
• II39521F	LK3517		M26x1,5	M16x1,5	-	150	10,0	F,E,W
I85028	LK3802	11	M26x1,5	M22x1,5	-	213	12,5	F,E,W
I83460	LK3805	12	M26x1,5	M22x1,5	-	213	16,0	B,T,E,VP
I98499	LK3810	11	M26x1,5	M14x1,5	-	225	10,0	F,T,E,W
I94314000	LK3813	11	M26x1,5	M22x1,5	-	213	10,0	F,E,W
II34069	LK3826	11	M26x1,5	M22x1,5	-	213	12,5	F,E,W
II36423	LK3830		M26x1,5	M14x1,5	-	225	12,5	F,E,W,T
II37220	LK3832	13	M26x1,5	M22x1,5	-	225	10,0	B,E,W
• SEB01586	LK3833		M22x1,5	M16x1,5	M10x1,0	225	12,5	F,T,E,VP
• SEB01597	LK3834		M22x1,5	M16x1,5	M10x1,0	225	12,5	F,T,E,W,ESS
• SEB01599	LK3835		M22x1,5	M16x1,5	M10x1,0	225	12,5	F,T,E,W,ESS
• SEB01601	LK3836		M22x1,5	M16x1,5	-	225	12,5	F,E,W,T
SEB01602	LK3837		M22x1,5	M16x1,5	-	225	12,5	F,E,W,T
SEB01603	LK3838		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
K000853	LK3839		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
• SEB01604	LK3839		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
• SEB01605	LK3840		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
SEB01819	LK3840		M22x1,5	M16x1,5	-	225	12,5	F,T,E,VP
• SEB01606000	LK3841		M18x1,5	M16x1,5	-	225	12,5	F,T,E,W
• II38683F	LK3845		M18x1,5	M16x1,5	-	225	12,5	F,E,W
K000861	LK3846		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
SEB01817	LK3846		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
• SEB01768	LK3850		M22x1,5	M16x1,5	-	225	12,5	F,T,E,VP
• SEB01759	LK3853		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W,ESS
• SEB01816	LK3854		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W,ESS
SEB01805	LK3855		M18x1,5	M16x1,5	-	225	12,5	F,E,W

Part Number	Type No.	Fig.	Port Sizes			Volume [cm³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
• SEB01813	LK3857		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
K000854	LK3859		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
SEB01841	LK3859		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
K001728	LK3867		M22x1,5	M16x1,5	-	225	12,5	F,T,E,W
I89873	LK3902	11	M26x1,5	M22x1,5	-	300	10,0	F,E,VP
I78976	LK3904	12	M26x1,5	M14x1,5	-	300	12,5	B,E,W
I89875	LK3908	11	M26x1,5	M22x1,5	-	300	10,0	F,T,E,W
I92089	LK3910	11	M26x1,5	M22x1,5	-	300	10,0	F,E,W
I90573	LK3914	11	M26x1,5	M22x1,5	-	300	10,0	F,T,E,W
I94064	LK3927	11	M26x1,5	M22x1,5	-	300	12,5	F,T,E,VP
II18606	LK3930	11	M22x1,5	M16x1,5	-	300	10,0	F,E,W
II19494	LK3935	10	M26x1,5	M18x1,5	-	300	10,0	B,E,W
II15998	LK3941		M26x1,5	M14x1,5	-	300	10,0	F,T,E,W
II17252	LK3947	14	M22x1,5	M16x1,5	-	300	10,0	F,T,E,W
K000740	LK3947	14	M22x1,5	M16x1,5	-	300	10,0	F,T,E,W
II18602	LK3954	11	M22x1,5	M16x1,5	-	300	12,5	F,T,E,W
II19495	LK3955	10	M26x1,5	M18x1,5	-	300	10,0	B,E,W
II30892	LK3959	14	M18x1,5	M16x1,5	M22x1,5	300	10,0	F,T,E,W
K000741	LK3959	14	M18x1,5	M16x1,5	M22x1,5	300	10,0	F,T,E,W
II30898	LK3960	12	M26x1,5	M22x1,5	-	300	12,5	B,E,VP
II31949	LK3963	12	M26x1,5	M22x1,5	-	300	12,5	B,E,W
II33163	LK3965	11	M18x1,5	M16x1,5	M22x1,5	300	10,0	F,T,E,W
II32223	LK3966	11	M18x1,5	M16x1,5	M22x1,5	300	10,0	F,T,E,W
II33509	LK3970	15	M26x1,5	M22x1,5	-	300	10,0	F,E,W
II33510	LK3971	15	M26x1,5	M22x1,5	-	300	10,0	F,E,W
II36925	LK3980		M26x1,5	M22x1,5	-	300	12,5	F,T,E,W
K000274000	LK3982		M18x1,5	M16x1,5	M22x1,5	300	10,0	F,E,W
II37757	LK3986	11	M18x1,5	M16x1,5	-	300	10,0	F,E,W
K000275	LK3986	11	M18x1,5	M16x1,5	-	300	10,0	F,E,W
SEB01842000	LK3994		M22x1,5	M16x1,5	-	360	12,5	F,T,E,VP
I60224	LP1119		M16x1,5	-	-	50	10,0	B,E,A
I42309	LP1154		M22x1,5	-	-	64	18,0	B,S,A
I67047	LP1157	16	M22x1,5	-	-	64	18,0	B,S,A
II40265F	LP1325		M26x1,5	-	-	110	10,0	B,E,A
I77568	LP1333	6	M26x1,5	-	-	110	8,0	B,E,A
I54075	LP1525	6	M26x1,5	-	-	150	10,0	B,E,A
I11443	LP1550	6	M22x1,5	-	-	150	10,0	B,S,A
I97363	LP1567		M26x1,5	-	-	150	16,5	B,T,E,A
II40280F	LP1577	6	M26x1,5	-	-	150	16,5	B,E,A
I78141	LP1585	6	M26x1,5	-	-	150	8,0	B,T,E,A
I80239	LP1588	6	M26x1,5	-	-	150	16,5	B,T,E,A
SEB00416	LP1596		M26x1,5	-	-	150	16,0	F,T,E,A
I58889	LP1828	6	M26x1,5	-	-	225	10,0	B,E,A
I75988	LP1949	6	M26x1,5	-	-	300	10,0	B,E,A
I71042	LP1950	17	M26x1,5	-	-	300	8,0	B,S,A
I60966	LP1969	17	M26x1,5	-	-	300	10,0	B,S,A
I73584	LP1992	18	M26x1,5	-	-	300	10,0	F,E,A
SEB00348	LP3832		M26x1,5	M18x1,5	-	248	10,0	F,E,VP
I83032	LP3842	12	M26x1,5	M22x1,5	-	213	10,0	B,T,E,W
SEB00650	LP3852		M26x1,5	M18x1,5	-	248	10,0	F,T,E,VP

1.1 Single Cylinder Compressors







Part Number	Type No.	Fig.	Port Sizes			Volume [cm³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
SEB01151	LP3860		M26x1,5	M18x1,5	-	248	10,0	F,E,VP
SEB01152	LP3861		M26x1,5	M18x1,5	-	248	10,0	F,T,E,VP
II14385F	LP3940		M26x1,5	M22x1,5	-	300	10,0	B,E,W,ESS
II40278F	LP3982	12	M26x1,5	M22x1,5	-	300	10,0	B,E,VP
I83985	LP1120		M12x1,5	-	-	50	18,0	B,E,A
II19193	LP1158		M22x1,5	-	-	64	18,0	B,S,A
II39152F	LP1550	6	M22x1,5	-	-	150	10,0	B,S,A
I75566	LP1806	6	M26x1,5	-	-	225	8,0	B,E,A
I75987	LP1946	6	M26x1,5	-	-	300	8,0	B,E,A
II37962	LP3966		M26x1,5	M22x1,5	-	300	10,0	B,E,W
SEB01751000	LP3970		M26x1,5	M16x1,5	-	360	12,5	F,E,W,VP
II39522F	LP3975	14	M18x1,5	M16x1,5	-	300	10,0	F,T,E,W
K001611	LP3993	12	M26x1,5	M22x1,5	-	300	12,5	B,E,W

¹⁾ LK1525 is the same as LK1539 except it has 1 Air Inlet & 1 Delivery not 2 of each

²⁾ Flange connection


Key:

- A** Air cooled
- B** Base mounted
- E** Uses engine oil
- ESS** With Energy Saving System
- F** Flange mounted
- II** Twin cylinder parallel
- IIV** V-Twin cylinder
- S** Uses own oil
- T** Through drive
- VP** Water cooled Valve Plate
- W** Water cooled
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes			Volume [cm ³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
1013099000	-		2)	2)		330		F,II,E,W
1013167000	-		2)	2)		330		B,II,E,VP
1013278000	-		2)	2)		330		F,II,E,VP
1013283000	-		2)	2)		330		F,II,E,VP
1013378000	-		M26x1,5	M18x1,5		330		F,II,E,VP
1013383000	-		M26x1,5	M18x1,5		330		F,II,E,VP
1013387000	-		M26x1,5	M18x1,5		330		F,II,E,VP
1013393000	-	1	M26x1,5	M18x1,5		330		F,II,E,VP
1013395000	-		M26x1,5	M18x1,5		384		F,II,E,VP
1013397000	-		M26x1,5	M18x1,5		384		F,II,E,VP
1013398000	-		M26x1,5	M18x1,5		330		F,II,E,VP
1013491000	-		M26x1,5	M18x1,5		384		F,II,E,VP
107507	-		1/2" PT	1/2" PT		750		F,II,T,E,W
109649	-		1/2" PT	1/2" PT		550		F,II,T,E,W
1186722SP	-	2	2)	3/8" NPTF	M12x1,25	440		F,II,E,W
1188844	-	2	2)	3/8" NPTF	1/4" NPTF	440		F,II,E,W
1189106	-	2	2)	M18x1,5	M12x1,25	440		F,II,E,W
1189107	-	2	2)	M16x1,5	M12x1,25	440		F,II,T,E,W
1194135	-		M26x1,5	M18x1,5	M12x1,5	630		F,II,T,E,W
1194194	-	2	M26x1,5	M18x1,5	M12x1,5	460		F,II,T,E,W
1194275	-	2	M26x1,5	M18x1,5		460		F,II,T,E,W
1194357	-		M26x1,5	M18x1,5		460		F,II,T,E,W

Part Number	Type No.	Fig.	Port Sizes			Volume [cm³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
229990	-		²⁾	3/8" NPTF	1/4" NPTF	1000		B,II,E,W
271721	-	3	²⁾	3/8" NPTF	1/4" NPTF	272		F,II,T,E,W
272921	-	3	²⁾	3/8" NPTF	1/4" NPTF	272		F,II,E,W
274838	-	4	²⁾	3/8" NPTF	1/4" NPTF	272		F,II,E,W
289257	-	3	²⁾	1/2" NPTF	1/4" NPTF	351		F,II,E,W
ACX75ZFG	-	1	M16x1,5	M14x1,5		400	11,0	F,II,E,W
ACX75ZGG	-	1	M16x1,5	M14x1,5		400	11,0	F,II,E,W
ACX75ZMG	-	1	²⁾	²⁾		400	12,5	F,II,E,VP
ACX76ZB	-	1	²⁾	²⁾		400	12,5	F,II,E,VP
ACX79CG	-	1	M16x1,5	M14x1,5		400	11,0	F,II,T,E,W
ACX80AA	-	1	²⁾	²⁾		500	12,5	F,II,T,E,W
ACX82A	-	1	²⁾	²⁾		500	12,5	F,II,E,W
ACX83D	-	1	²⁾	²⁾		600	12,5	F,II,E,W
ACX83DK	-	1				600	12,5	F,II,E,W
ACX83DX	-	1	²⁾	²⁾		600	12,5	F,II,T,E,W
KZ1087/4	-	5	3/4" NPTF	1/2" NPTF		440		B,II,E,W
KZ1228/1	-	2	²⁾	M18x1,5	M12x1,5	440		F,II,E,W
KZ396/3	-	2	²⁾	3/8" NPTF	1/4" NPTF	440		F,II,E,W
KZ433/6	-	2	²⁾	3/8" NPTF	1/4" NPTF	440		F,II,E,W
KZ996/2	-	2	²⁾	M16x1,5	M12x1,25	440		F,II,E,W
K000230000	LK4918	6	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K001267000	LK4918	6	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K000231000	LK4919	7	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K000232	LK4920	7	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K000233000	LK4921		M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K001268000	LK4921		M26x1,5	M16x1,5		608	13,0	F,II,E,VP
II39523F	LK4927		M26x1,5	M16x1,5		608	13,0	F,II,E,VP
II40277F	LK4931		M26x1,5	M16x1,5		600	13,0	F,T,E,VP
K000839	LK4935		M26x1,5	M18x1,5	M12x1,5	628	13,0	F,II, T, E,VP,ESS
K001207	LK4935		M26x1,5	M18x1,5	M12x1,5	628	13,0	F,II, T, E,VP,ESS
I11482	LP2950		M22x1,5	-		300	10,0	B,II,S,A
I79195	LP2982		M26x1,5	-		300	10,0	B,II,S,A
I83843	LP2983		M22x1,5	-		300	10,0	B,II,S,A
I86909000	LP4812	2	M26x1,5	M16x1,5		440	12,5	F,II,E,VP
I90499000	LP4813	2	M26x1,5	M16x1,5		440	12,5	F,II,E,VP
I97492	LP4814	2	M26x1,5	M16x1,5		440	12,5	F,II,E,VP ¹⁾
I97493	LP4815	2	M26x1,5	M16x1,5		440	12,5	F,II,E,VP ¹⁾
SEB00820	LP4818		M26x1,5	M18x1,5		384	11,0	F,II,T,E,VP
SEB01782	LP4823	2	M26x1,5	M14x1,5		440	12,5	F,II,E,W
II15993000	LP4825	2	M26x1,5	M16x1,5	M22x1,5	440	12,5	F,II,E,W,ESS
SEB01781	LP4830	2	M26x1,5	M14x1,5		440	12,5	F,II,E,W
SEB01245	LP4832	2	M26x1,5	M18x1,5		384	11,0	F,II,E,VP
SEB01485	LP4833		M26x1,5	M18x1,5		500	12,5	F,II,E,VP
SEB01496	LP4838		M26x1,5	M18x1,5		500	12,5	F,II,T,E,VP
SEB01472	LP4840		M26x1,5	M18x1,5		500	12,5	F,II,E,VP
II30901	LP4842		M26x1,5	M16x1,5		440	12,5	F,II,E,VP
SEB01430	LP4843		M26x1,5	M18x1,5		500	12,5	F,II,E,VP
II32842	LP4844		M26x1,5	M16x1,5		440	12,5	F,II,E,VP
SEB01455000	LP4845		M26x1,5	M18x1,5		500	12,5	F,II,E,VP
SEB01478	LP4846		M26x1,5	M18x1,5		500	12,5	F,II,E,VP


Part Number	Type No.	Fig.	Port Sizes			Volume [cm³]	Maximum Pressure [bar]	Comment/Key
			Delivery	Water	Unloader			
SEB01480	LP4849		M26x1,5	M18x1,5		500	12,5	F,II,E,VP
II35564000	LP4850		M26x1,5	M16x1,5		440	12,5	F,II,E,W
SEB01545	LP4851		M26x1,5	M18x1,5		500	12,5	F,II,E,VP
SEB01588	LP4852		M26x1,5	M16x1,5		440	12,5	F,II,T,E,VP
SEB01747	LP4855		M26x1,5	M18x1,5		500	12,5	F,II,T,E,VP
K000821	LP4857		M26x1,5	M18x1,5	M12x1,5	460	12,5	F,II,T,E,VP
K001095	LP4858		M26x1,5	M18x1,5		460	10,0	F,II,T,E,VP
I76766	LP4919		M26x1,5	M22x1,5		608	10,0	B,II,E,VP
I81946	LP4921	8	M26x1,5	M22x1,5		608	8,0	F,IV,E,VP
I87734	LP4924		M26x1,5	M14x1,5		600	10,0	B,II,E,VP
II15992000	LP4934	2	M26x1,5	M16x1,5	M22x1,5	608	12,5	F,II,E,VP,ESS
II30895	LP4934	2	M26x1,5	M16x1,5	M22x1,5	608	12,5	F,II,E,VP,ESS
II16243	LP4936		M26x1,5	M16x1,5	M22x1,5	608	12,5	F,II,E,W
II16417	LP4937							
SEB01154	LP4939		M26x1,5	M18x1,5		330	10,0	F,II,E,VP
SEB01155	LP4940		M26x1,5	M18x1,5		384	10,0	F,II,E,VP
SEB01156	LP4941		M26x1,5	M18x1,5		330	10,0	F,II,E,VP
SEB01157	LP4942		M26x1,5	M18x1,5		384	10,0	F,II,E,VP
SEB01158	LP4943		M26x1,5	M18x1,5		330	10,0	F,II,E,VP
SEB01159	LP4944		M26x1,5	M18x1,5		384	12,5	F,II,E,VP
SEB01160	LP4945		M26x1,5	M18x1,5		330	17,0	F,II,E,VP,ESS
II31730	LP4955	7	M26x1,5	M16x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS,T
II17395000	LP4957	7	M26x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP
K002045000	LP4957	7	M26x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP
II30899	LP4960	2	M26x1,5	M16x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
K000237000	LP4960	2	M26x1,5	M16x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II30900	LP4961	7	M26x1,5	M16x1,5	M22x1,5	608	12,5	F,II,E,VP,ESS
II31955	LP4962		M22x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II32686	LP4963	7	M26x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II32687000	LP4964	7	M26x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
K002046	LP4964	7	M26x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II32688	LP4965	7	M22x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
K002047	LP4965	7	M22x1,5	M18x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II33164000	LP4967	7	M26x1,5	M16x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II33514000	LP4968	7	M26x1,5	M16x1,5	M22x1,5	608	13,0	F,II,T,E,VP,ESS
II34405	LP4970	7	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K000236000	LP4974	7	M26x1,5	M16x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II37365	LP4975		M26x1,5	M16x1,5		608	13,0	B,II,E,VP
II37369	LP4977		M27x2	M16x1,5	M22x1,5	608	13,0	F,II,E,VP,ESS
II37437	LP4981		1-1/16"	3/4"-16	7/8"-14	608	13,0	F,II,E,VP,ESS
SEB01784	LP4983		M26x1,5	M16x1,5		608	13,0	F,II,E,VP
SEB01783000	LP4984	7	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K000229000	LP4985		M26x1,5	M16x1,5		608	13,0	F,II,E,VP
II38776F	LP4991		M26x1,5	M16x1,5		608	13,0	F,II,E,VP
II38777F	LP4992	7	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
K000235	LP4992	7	M26x1,5	M16x1,5		608	13,0	F,II,E,VP
SEB01676	LP4999		1-1/16"	3/4"-16	7/8"-14	608	13,0	F,II,E,

¹⁾ LP4814 is the same as LP4815 except the Cylinder Head is turned 180 Degrees

²⁾ Flange connection


Key:

- A** Air cooled
- G** Supplied with gaskets
- VP** Complete with Valve Plate
- W** Water cooled
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes			Comment/Key
			Suction	Delivery	Water	
I60312	ZB4187	1	M26x1,5	M26x1,5	M22x1,5	W,G,VP
I66849	ZB4224	1	M26x1,5	M26x1,5	M22x1,5	W,G,VP
I66994	ZB4225	1	M26x1,5	M26x1,5	M22x1,5	W,G,VP
I88477	ZB4233	2	M26x1,5	M26x1,5	M22x1,5	W,G,VP
I88057	ZB4275	1	M26x1,5	M26x1,5	M22x1,5	W,VP
II40284F	ZB4289	3	M26x1,5	M26x1,5	M22x1,5	W,G,VP

2. Air Dryers



2.1 Air Dryers

Key:

B1 Bayonet (2 x Ø4,0 + 1 x Ø4,5)

B2 Bayonet DIN 72585 (2 x Ø2,5)

IS Internal Silencer

K1 Kostal M27x1,0 (2 x Ø4,0)

K2 Kostal M27x1,0 (2 x Ø4,0 + 1 x Ø4,5)

Ot Other

Sc Screw No.10-32 UNF

Sf Exhaust Silencer fitted

TP Timed Purge

V Volvo 'D' (2 x Ø3,5) (V)








A Safety valve pressure [bar]

B Unloader cut-out pressure [bar] or Signalled (S)

C Heater Voltage

D Exhaust Connector

• Preferred Product



Part Number	Type No.	Fig.	Port Sizes		A	B	C	D	Comment
			Supply/Delivery	Purge					
1185252	-	1	M22x1,5	M12x1,5	-	S	24	3xScrew	V,Sf
1186505	-	1	1/2" NPSI	1/2" NPSI	11,0	S	24	3xScrew	K1,Sf
267002	-	2	M22x1,5	M12x1,5	-	S	24	3xScrew	Sc,Sf
267085	-	2	M22x1,5	M12x1,5	-	S	24	3xScrew	Sc,Sf
267121SP	-	2	M22x1,5	M12x1,5	13,0	S	24	3xScrew	K1,Sf
267122SP	-	1	M22x1,5	M12x1,5	13,0	S	24	3xScrew	K1,Sf
269807	-	2	M22x1,5	M12x1,5	11,0	S	24	3xScrew	Sc,Sf
269827SP	-	2	1/2" NPSI	1/2" NPSI	-	S	24	3xScrew	K1,Sf
295591	-	2	M22x1,5	M12x1,5	10,3	S	24	3xScrew	Sc,Sf
0484460021000	-	3	M22x1,5	M12x1,5	12,0	S	-	Snap-on	-
0484460022000	-	3	M22x1,5	M12x1,5	12,0	S	24	Snap-on	K1,Sf
0484460023000	-	3	M22x1,5	M12x1,5	13,5	S	-	Snap-on	-
0484460024000	-	3	Voss NG12	Voss NG8	14,0	S	24	Snap-on	K1
0484460153000	-	4	M22x1,5	M12x1,5	13,5	9,8	24	Snap-on	IS,K1,Sf

Part Number	Type No.	Fig.	Port Sizes		A	B	C	D	Comment
			Supply/Delivery	Purge					
0484460165000	-	4	M22x1,5	M12x1,5	22,0	18,3	-	Pipe 20mm	-
0484460170000	-	4	Voss NG12	Voss NG8	13,5	9,8	24	Pipe 31mm	B1
0484460171000	-	4	M22x1,5	M12x1,5	13,5	8,8	24	Pipe 20mm	K1
0484460177000	-	4	M22x1,5	M12x1,5	13,5	9,8	24	Snap-on	IS,K1,Sf
0484460186000	-	4	Voss NG12	Voss NG8	13,5	9,8	24	Snap-on	IS,B1.Sf
0484460196000	-	4	Voss NG12	Voss NG8	13,5	9,8	24	Snap-on	B1
0484460202000	-		M22x1,5	M12x1,5	22,0	18,3	24	M22x1,5	K1
0484460204000	-		M22&M12x1,5	M12x1,5	20,0	9,8	-	M22x1,5	-
I87076	LA6208	5	M22x1,5	M12x1,5	15,5	12,5	-	Snap-on	IS
I92081	LA6222	5	M22x1,5	M12x1,5	15,5	12,5	-	Snap-on	IS
I94102	LA6228	6	M22x1,5	M12x1,5	13,0	10,0	24	Snap-on	IS,B1
I94956	LA6233	5	M22x1,5	M12x1,5	13,0	10,0	-	Snap-on	IS
I99723	LA6247	6	Voss NG12	Voss NG8	13,0	8,5	24	Snap-on	IS,K1
II39748F	LA6273		M22x1,5	M12x1,5	13,0	8,0	24	Snap-on	IS,K2
II39867F	LA6277		M22x1,5	M12x1,5	13,0	8,1	12	Snap-on	IS,K1
I85139	LA6700	7	M22x1,5	M12x1,5	-	S	-	Snap-on	IS
I87496	LA6703	8	M22x1,5	M12x1,5	-	S	24	Snap-on	IS,K1
I98136	LA6709	8	M22x1,5	M12x1,5	13,0	S	24	Snap-on	IS,K1
II36935000	LA6710	8	M22x1,5	M12x1,5	17,0	S	24	Snap-on	IS,V
II36936000	LA6711	8	M22x1,5	M12x1,5	17,0	S	24	Snap-on	IS,K1
II36933	LA6734	7	Voss NG12	Voss NG8	-	S	-	Pipe 20mm	IS
I98189	LA6735	8	Voss NG12	Voss NG8	-	S	24	Pipe 20mm	IS,K1
II30808	LA6736	8	M22x1,5	M12x1,5	13,0	S	24	Snap-on	IS,K2
• II19332	LA8001	9	M22x1,5	-	13,0	8,6	24	Snap-on	TP,K1
• II19333	LA8002	9	M22x1,5	-	13,0	8,6	24	Snap-on	TP,K1
• II19334	LA8003	9	M22x1,5	-	13,0	9,5	24	Snap-on	TP,K1
• II19335	LA8004	9	M22x1,5	-	13,0	10,0	24	Snap-on	TP,K1
• II19337	LA8006	9	M22x1,5	-	13,0	8,6	24	Snap-on	TP,K1
• II19338	LA8007	9	M22x1,5	-	13,0	9,5	24	Snap-on	TP,K1
• II19362	LA8008	9	M22x1,5	-	15,5	12,2	24	Snap-on	TP,K1
• K000479	LA8008	9	M22x1,5	-	15,5	12,2	24	Snap-on	TP,K1
• II19364	LA8010	9	M22x1,5	-	13,0	8,6	-	Snap-on	TP
• II37926	LA8011	9	M22x1,5	-	13,0	8,6	-	Snap-on	TP
• II19366	LA8012	9	M22x1,5	-	13,0	9,5	-	Snap-on	TP
• II19367	LA8013	9	M22x1,5	-	13,0	10,0	-	Snap-on	TP
• II19369	LA8015	9	M22x1,5	-	13,0	8,6	-	Snap-on	TP
• II37927	LA8016	9	M22x1,5	-	13,0	9,5	-	Snap-on	TP
• II19763	LA8025	9	M22x1,5	-	13,0	7,35	-	Snap-on	TP,IS
• II30455	LA8027	9	M22x1,5	-	13,0	9,5	12	Snap-on	TP,K1
• II30458	LA8028	9	M22x1,5	-	13,0	8,3	24	Snap-on	TP,K1,Sf
• II30809	LA8030	9	M22x1,5	-	13,0	8,5	-	Snap-on	TP,IS
• II32584	LA8035	9	M22x1,5	-	15,5	12,5	24	Snap-on	TP,IS,B2
• II32589	LA8036	9	M22x1,5	-	15,5	12,5	-	Snap-on	TP
• II33578	LA8037	9	M22x1,5	-	13,0	10,0	24	Snap-on	TP,IS,B2
• II34976	LA8040	9	M22x1,5	-	15,5	12,5	-	Snap-on	TP,IS
• II37928	LA8041	9	M22x1,5	-	15,5	12,5	-	Snap-on	TP,IS
• II35526	LA8044	9	M22x1,5	-	15,5	12,5	24	Snap-on	TP,IS,K1
• II37412	LA8047	9	M22x1,5	-	13,0	8,3	24	Snap-on	TP,IS,K1
• II37924	LA8050	10	M22x1,5	-	13,0	10,0	24	Snap-on	TP,IS,K1
• II37930	LA8053	9	M22x1,5	-	15,5	12,2	24	Snap-on	TP,IS,K1

Part Number	Type No.	Fig.	Port Sizes		A	B	C	D	Comment
			Supply/Delivery	Purge					
• II38788F	LA8059	9	M22x1,5	-	15,5	12,5	24	Snap-on	TP,IS,B2
• II38798F	LA8060	9	M22x1,5	-	13,0	8,1	24	Snap-on	TP,IS,K1
• II39054F	LA8061		M22x1,5	-	15,5	12,5	24	Snap-on	TP,IS,B2
• II40133F	LA8062		M22x1,5	-	15,5	11,0	24	Snap-on	TP,IS,B2
• K000754	LA8063		M22x1,5	-	15,5	12,5	24	Snap-on	TP,IS,B2
• K000755	LA8064	11	M22x1,5	-	13,0	9,5	24	Snap-on	TP,IS,B2
• K001056	LA8065	11	M22x1,5	-	15,5	12,5	24	Snap-on	TP,IS,B2
• K001197	LA8066		M22x1,5	-	13,0	10,0	-	Snap-on	TP,K1
• K002135	LA8068		M22x1,5	-	13,0	10,0	-	Snap-on	TP,K1
• II38302F	LA8104		²⁾	-	13,0	11,0	24	Snap-on	IS,B2
• II38303F	LA8105		²⁾	-	13,0	11,0	24	Snap-on	IS,B2
• II38304F	LA8106		²⁾	-	13,0	11,0	24	Snap-on	IS,B2
• II38305F	LA8107		²⁾	-	13,0	11,0	24	Snap-on	IS,B2
• II38613F	LA8111		²⁾	-	13,0	12,5	24	Snap-on	IS,B2
II38620F ³⁾	LA8116 ³⁾	12	¹⁾	-	13,0	10,0	24	Snap-on	IS,B2
• II38672F	LA8117		¹⁾	-	13,0	10,4	24	Snap-on	IS,B2
• II40554F	LA8124		²⁾	-	13,0	10,5	24	Snap-on	IS,B2
• II40555F	LA8125		²⁾	-	13,0	10,5	24	Snap-on	IS,B2
• II40556F	LA8126		²⁾	-	13,0	10,5	24	Snap-on	IS,B2
• II40557F	LA8127		²⁾	-	13,0	12,5	24	Snap-on	IS,B2
• II40558F	LA8128		²⁾	-	13,0	12,5	24	Snap-on	IS,B2
• II40559F	LA8129		²⁾	-	13,0	12,5	24	Snap-on	IS,B2
K000390 ³⁾	LA8130 ³⁾	12	M22x1,5	-	13,0	10,4	24	Snap-on	IS,B2
K000391 ³⁾	LA8131 ³⁾	12	M22x1,5	-	13,0	10,4	24	Snap-on	IS,B2
K000392 ³⁾	LA8132 ³⁾	12	M22x1,5	-	13,0	10,4	24	Snap-on	IS,B2
• II19211	LA8200	9	¹⁾	Voss NG8	11,5	8,5	24	Pipe 20mm	K1
• II19212	LA8201	9	M22x1,5	Voss NG8	14,5	10,0	24	Pipe 20mm	K1
• II19213	LA8202	9	M22x1,5	Voss NG8	14,5	12,0	24	Pipe 20mm	K1
• II19214	LA8203	9	¹⁾	Voss NG8	11,5	8,5	-	Pipe 20mm	IS
• II19215	LA8204	9	M22x1,5	Voss NG8	14,5	10,0	-	Pipe 20mm	IS
• II19216	LA8205	9	M22x1,5	Voss NG8	14,5	12,0	-	Pipe 20mm	IS
• II19375	LA8206	9	¹⁾	Voss NG8	13,0	9,8	24	Snap-on	B1
• II19204	LA8207	9	Voss NG12	Voss NG8	13,0	8,5	-	Snap-on	IS
• II19205	LA8208	9	Voss NG12	Voss NG8	13,0	8,5	24	Snap-on	B2
• II19206	LA8209	9	Voss NG12	Voss NG8	13,0	10,0	-	Snap-on	IS
• II19207	LA8210	9	Voss NG12	Voss NG8	13,0	10,0	24	Snap-on	B2
• II19208	LA8211	9	Voss NG12	Voss NG8	15,5	12,5	-	Snap-on	IS
• II19209	LA8212	9	Voss NG12	Voss NG8	15,5	12,5	24	Snap-on	B2
• II19483000	LA8219	9	M22x1,5	M12x1,5	15,5	11,0	-	Snap-on	IS
• II19484	LA8220	9	M22x1,5	M12x1,5	15,5	11,0	24	Snap-on	B1
• II19485	LA8221	9	M22x1,5	M12x1,5	17,0	12,5	-	Snap-on	IS
• II19486	LA8222	9	M22x1,5	M12x1,5	17,0	12,5	24	Snap-on	IS,B1
• II30178	LA8223	9	1/2" NPTF	1/4" NPTF	13,0	8,4	24	Snap-on	IS,K1
• II30182	LA8224	9	M22x1,5	M12x1,5	13,0	8,4	24	Snap-on	IS,B1
• II30179	LA8225	9	M22x1,5	M12x1,5	13,0	8,1	24	Snap-on	IS,K1
• II30180	LA8226	9	M22x1,5	M12x1,5	13,0	8,4	24	Snap-on	IS,K1
• II30181	LA8227	9	M22x1,5	M12x1,5	13,0	10,0	24	Snap-on	IS,K1
• II30185	LA8228	9	M22x1,5	M12x1,5	13,0	8,1	-	Pipe 20mm	IS
• II30443	LA8229	9	M22x1,5	M12x1,5	13,0	9,5	-	Snap-on	IS
• II30444	LA8230	9	M22x1,5	M12x1,5	13,0	10,0	24	Snap-on	IS,K1

Part Number	Type No.	Fig.	Port Sizes		A	B	C	D	Comment
			Supply/Delivery	Purge					
• II30445	LA8231	9	M22x1,5	M12x1,5	13,0	7,8	-	Snap-on	IS
• II30446	LA8232	9	M22x1,5	M12x1,5	15,5	12,5	-	Snap-on	IS
• II30447	LA8233	9	M22x1,5	M12x1,5	15,5	12,5	24	Snap-on	IS,K1
• II30448	LA8234	9	M22x1,5	M12x1,5	13,0	8,1	24	Snap-on	IS,K1
• II30449	LA8235	9	M22x1,5	M12x1,5	13,0	10,0	-	Snap-on	IS
• II30450	LA8236	9	M22x1,5	M12x1,5	13,0	8,1	-	Snap-on	IS
• II30451	LA8237	9	M22x1,5	M12x1,5	13,0	8,1	24	Snap-on	IS,K2
• II30657	LA8239	9	M22x1,5	M12x1,5	13,0	7,35	-	Snap-on	IS
• II30650	LA8242	9	M22x1,5	M12x1,5	15,5	11,0	24	Pipe 20mm	IS,K1
• II30651	LA8243	9	M22x1,5	M12x1,5	13,0	9,5	24	Snap-on	IS,K1
• II30652	LA8244	9	M22x1,5	M12x1,5	13,0	7,8	24	Snap-on	IS,K1
• II30810	LA8245	9	M22x1,5	M12x1,5	13,0	8,5	24	Snap-on	IS,K1
• II30812	LA8247	9	M22x1,5	M16x1,5	13,0	9,5	24	Snap-on	IS,K1
• II31112	LA8250	9	M22x1,5	M12x1,5	13,0	7,35	24	Snap-on	IS,K1
• II31113	LA8251	9	M22x1,5	M12x1,5	13,0	7,35	-	Snap-on	IS
• II31118	LA8252	9	M22x1,5	M12x1,5	13,0	8,3	-	Snap-on	IS
• II31119	LA8253	9	M22x1,5	M12x1,5	13,0	8,1	-	Snap-on	IS
• II31477	LA8256	9	M22x1,5	M12x1,5	13,0	10,0	24	Snap-on	IS,B1
• II31478	LA8257	9	M22x1,5	M12x1,5	13,0	8,1	24	Snap-on	IS,B1
• II31481	LA8259	9	M22x1,5	M12x1,5	13,0	8,3	24	Snap-on	IS,K1
• II33929	LA8263	9	M22x1,5	M16x1,5	13,0	9,8	24	Snap-on	IS,B2
• II33424	LA8267	9	M22x1,5	M12x1,5	11,5	8,5	12	Snap-on	IS,K1
• II35522	LA8269	9	M22x1,5	M12x1,5	13,0	8,1	24	Snap-on	IS,K1
• II35523	LA8270	9	Voss NG12	Voss NG8	13,0	10,0	24	Snap-on	IS,K1,Sf
• II39751F	LA8271	9	M22x1,5	M12x1,5	13,0	8,5	24	Snap-on	IS,V
• II36257	LA8272	9	M22x1,5	M12x1,5	15,5	11,0	24	Snap-on	IS,B2
• II36258	LA8273	9	M22x1,5	M12x1,5	17,0	12,5	24	Snap-on	IS,B2
• II36653	LA8275		M22x1,5	M12x1,5	13,0	8,1	-	Snap-on	IS,Sf
• II36940	LA8281	9	M22x1,5	M12x1,5	14,5	10,0	12	Snap-on	IS,K1
• II37662	LA8283	9	M22x1,5	M12x1,5	11,0	7,9	24	Snap-on	IS,K1
• II37663	LA8284	9	Voss NG12	Voss NG8	13,0	9,8	24	Snap-on	IS,B2
• II39752F	LA8286	9	M22x1,5	M12x1,5	17,0	12,0	24	Snap-on	IS,V
• II39740F	LA8288	9	M22x1,5	M12x1,5	15,5	12,5	24	Snap-on	IS,K1
• K000336	LA8289		M22x1,5	M12x1,5	13,5	9,8	24	Snap-on	IS,K1
• II30184	LA8700	9	1/2" NPTF	1/4" NPTF	13,0	S	24	Snap-on	IS,K1
• II39884F	LA8701	11	M22x1,5	M12x1,5	13,0	S	-	Snap-on	IS
• II17366	LA9000	13	M22x1,5	Voss NG8	14,5	12,3	24	Pipe 20mm	B2
• II17369	LA9001	13	M22x1,5	Voss NG8	14,5	12,3	-	Pipe 20mm	-
• II32581	LA9002	13	M22x1,5	Voss NG8	14,0	10,0	-	Pipe 20mm	-
• II34982	LA9003	13	M22x1,5	Voss NG8	14,0	10,0	-	Pipe 20mm	-
• II36007	LA9004	13	M22x1,5	Voss NG8	14,0	12,3	24	Pipe 20mm	B2
• II36239	LA9005	13	M22x1,5	Voss NG8	14,0	12,3	-	Pipe 20mm	-
• II31739	LA9007	13	M22x1,5	Voss NG8	14,0	10,0	-	Pipe 20mm	-
• II37038	LA9008	13	M22x1,5	Voss NG8	14,0	10,0	-	Pipe 20mm	-
• II38308F	LA9010	13	M22x1,5	Voss NG8	14,5	12,3	24	Pipe 20mm	B2
• II38309F	LA9011	13	M22x1,5	Voss NG8	14,5	12,3	-	Pipe 20mm	-

¹⁾ Supply M22x1,5 Delivery Voss NG12²⁾ Supply M22x1,5 Delivery M16x1,5³⁾ With OEM Logo not for sale to the aftermarket

Part Number	Type No.	Fig.	Comment
1185834	-		Kostal Plug, 2 Pin, M27x1,0
1186698	-		Reservoir 1/2"NPSI Ports, 4 Ltr Volume, 200mm Diameter
267125SP	-		Rationalised metric end cover assembly with Kostal Plug for AD2 & ADS2
272897SP ¹⁾	-		Replacement Cartridge for AD6
286968XU	-		Full Cartridge Assembly for AD2 & ADS2
I87122004	-		Kostal Heater
II38789F004	-		As II40100F but with M42x1,5 thread not M39x1,5
II40100F ¹⁾	-		Replacement Cartridge for LA6, LA8, APU & Formerly Bosch
SK2767/2	-		Replacement Cartridge for AD2 & ADS2
SK2767/5	-		Cartridge Refill for AD2 & ADS2
SK2914/1	-		Replacement Cartridge for AD6-S

¹⁾ II40100F and 272897SP are interchangeable

2.3 Air Dryer Retrofit Kits


Part Number	Type No.	Fig.	Airdryer	Comment
SK3000/1	-		LA8223	Imperial LA8 Air Dryer, built in unloader (8,4 bar), K1, Kostal Plug, 4,0 Litre Purge Tank
SK3000/2	-		LA8700	Imperial LA8 Air Dryer, Governor controlled, K1, Kostal Plug, 4,0 Litre Purge Tank
SK3000/3	-		LA8226	Metric LA8 Air Dryer, built in unloader (8,4 bar), K1, Kostal Plug, 4,0 Litre Purge Tank
SK3000/4	-		LA6709	Metric LA8 Air Dryer, Governor controlled, K1, Kostal Plug, 4,0 Litre Purge Tank

3. Air Processing Units



Key:

- Preferred Product



Part Number	Type No.	Fig.	Air Dryer	Protection Valve	
• II32582	ZB4506		LA9002	AE4505	
• II35530	ZB4511	1	LA9000	AE4510	
• II35531	ZB4512	1	LA9001	AE4510	
• II37666	ZB4524	1	LA8104	AE4608	
• II37667	ZB4525	1	LA8105	AE4608	
• II37668	ZB4526	1	LA8106	AE4608	
• II37669	ZB4527	1	LA8107	AE4608	
• II38310F	ZB4534	1	LA9010	AE4510	
• II38311F	ZB4535	2	LA9011	AE4510	
• II38619F	ZB4544	2	LA8116	AE4526	
• II38005F	ZB4545	2	LA8117	AE4528	
• II38799F	ZB4548	2	LA8119	AE4528	
• II39866F	ZB4564	1	LA9004	AE4506	
K000394 ¹⁾	ZB4578 ¹⁾	3	LA8130 ¹⁾	AE4528	
• K000395	ZB4579	3	LA8131	AE4529	
• K000396	ZB4580	3	LA8132	AE4528	
• K001446	ZB4586		LA8124	AE4502	
• K001447	ZB4587		LA8125	AE4502	
• K001448	ZB4588		LA8126	AE4502	
• K001449	ZB4589		LA8127	AE4503	
• K001450	ZB4590		LA8128	AE4503	
• K001453	ZB4591		LA8129	AE4503	
• K001454	ZB4592		LA8124	AE4516	
• K001455	ZB4593		LA8125	AE4516	
• K001456	ZB4594		LA8125	AE4516	
• K001457	ZB4595		LA8127	AE4527	
• K001458	ZB4596		LA8128	AE4527	
• K001459	ZB4597		LA8129	AE4527	

¹⁾ With OEM Logo not for sale to the aftermarket


4. Alcohol Injectors / Evaporators



4.1 Alcohol Injectors

Key:

- S Signalled
- Preferred Product

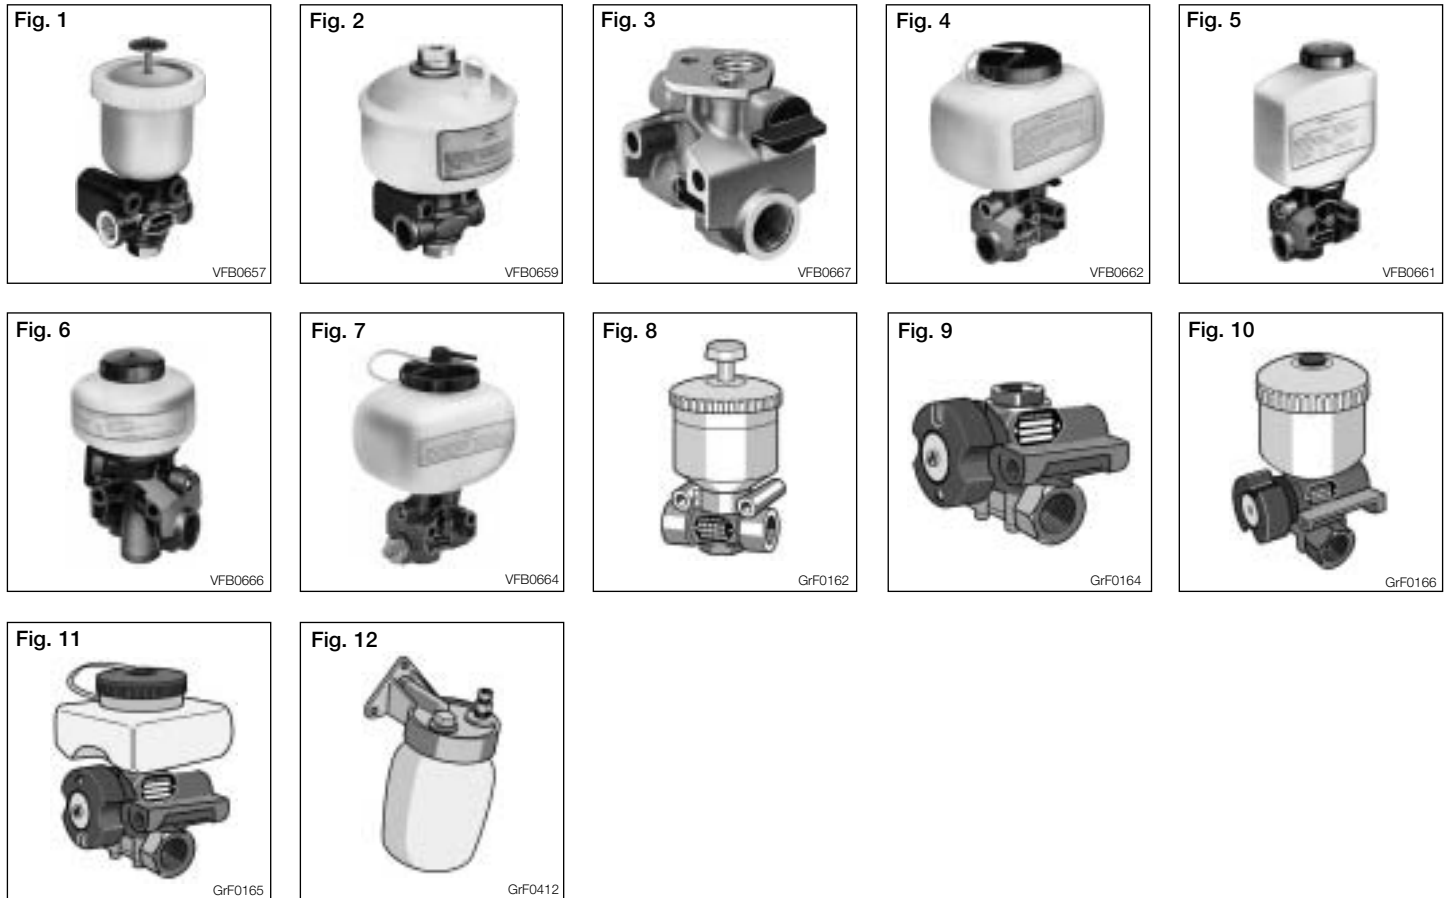

Part Number	Type No.	Fig.	Port Size	Bottle size [cm³]	Comment/Key	
0484450003000	-	1	M22x1,5	250	-	
0484451002000	-	2	M22&M12x1,5	1000	S	
0484451005000	-	3	M22&M12x1,5	-	S	
0484451006000	-	3	M22x1,5	-	-	
0484451007000	-	4	M22&M12x1,5	1200	S	
0484451008000	-	5	M22&M12x1,5	600	S	
0484451009000	-	5	M22x1,5	600	-	
0484451011000	-	6	M22x1,5	250	-	
0484451013000	-	4	M22&M12x1,5	1200	S	
0484451014000	-	3	M22&M12x1,5	-	S	
0484451018000	-	7	M10x1,0	1200	-	
0484451019000	-	5	M22x1,5	450	S	
1111326000	-		G3/4"J - G1/4"J	600	S	
272817	-		1/2" & 1/8" NPTF	1000	S	
443612000000	-					
443612011001	-					
443612012000	-					
I25513	LA1100	8	M22x1,5	250	S	
I71532	LA4103		M22x1,5	280	S	
I82290	LA4114	9	M22x1,5	-	-	

4.1 Alcohol Injectors

Part Number	Type No.	Fig.	Port Size	Bottle size [cm³]	Comment/Key	
I82291	LA4115	10	M22x1,5	500	S	
I90375	LA4116	10	M22x1,5	500	S	
I82293	LA4117	10	M22&M12x1,5	300	S	
I82387	LA4118	9	M22x1,5	-	S	
I82388	LA4119	9	M22x1,5	-	S	
I82389	LA4120	9	M22x1,5	-	S	
I83048	LA4121	10	M22x1,5	300	S	
I90186	LA4127	11	M22x1,5	250	S	
I89242	LA4128	9	M22x1,5	-	S	
I85656	LA4129	10	M22x1,5	500	S	
I86679	LA4130	10	M12x1,5	500	S	
I88036	LA4131	10	M22x1,5	500	S	
I92754	LA4133	9	M22x1,5	500	-	
I94649	LA4134	10	M22x1,5	500	-	
I94650	LA4135	10	M22x1,5	500	S	

4.2 Alcohol Evaporators




Part Number	Type No.	Fig.	Port Size	Bottle size [cm³]	
228663	-	12	1/8" NPTF	568	
295521	-	12	M10x1,5	568	

5. Filters



Key:

- A Maximum Operating Pressure [bar]
- B Safety Valve pressure [bar]
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		A	B	
			Supply	Delivery			
0457101001000	-	1	M22x1,5	M22x1,5	8,0		
1031087903	-						
1111470000	-		G 3/8" J	G 3/8" J	20,0		
1111479000	-						
1111494000	-		M16x1,5	M16x1,5	20,0		
1142350000	-						
1149300110	-						
1149300112	-						
1427432000	-	2					
1487432006	-	2					
226908-1	-	3	1/4" NPTF	1/4" NPTF			
3130499008	-						
AC972A	-		M22x1,5	M22x1,5	20,0		
I2006	AF1100						
I13886	LA2100	2	M22x1,5	M22x1,5	10,0		
I99660	LA2103	4	M22x1,5	M22x1,5	20,0		

6. Drain Valves / Water Separators / Condensers

6.1 Drain Valves

Key:

- A Automatic
- M Manual
- S Signalled
- CV Delivery Check Valve
- D Drain Valve
- P Purge Valve
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		Comment/Key
			Supply	Control	
0481019002000	-	1	M22x1,5	-	M
0481019003000	-	2	M22x1,5	-	A
0481019004000	-	3	M22x1,5	-	M
0481019005000	-	3	M22x1,5	-	M
0481019007000	-	3	M22x1,5	-	M
0481019008000	-	1	M22x1,5	-	M
1110711000	-		G1/2"J	-	M
1111693000	-		M22x1,5	-	M
1111695000	-		M22x1,5	-	M
1111696000	-		M22x1,5	-	A
1111698000	-		G1/2"J	-	A
443612061001	-		-	-	-
443612061003	-		-	-	-
443612061702	-		-	-	-
SEB00876	AE1129		M12x1,5	-	M
I85893	EE1106	4	M20x1,5	-	M

6.1 Drain Valves

Part Number	Type No.	Fig.	Port Sizes		Comment/Key
			Supply	Control	
I42387	EE4101	5	M12x1,5	M12x1,5	A,S
I84866	EE4104	6	M22x1,5	M12x1,5	A,S
I79512	EE4106	6	M22x1,5	M12x1,5	A,S
II16096	EE4106	6	M22x1,5	M12x1,5	A,S
I82646	EE4107	6	M22x1,5	M12x1,5	A,S
K000745	EE4107	6	M22x1,5	M22x1,5	A,S
I92054	EE4115	6	M22x1,5	-	A,S
II16095	EE4206	7	M22x1,5	-	A
II36087	EE4207		M22x1,5	-	A,S
I16438	EWM2		M22x1,5	-	M
KW2350/1	-	8	1/2 NPTF	-	M
KW2350/2	-	8	M22x1,5	-	M
KW718/2	-	9	1/4 NPTF	-	M
KX2068/1	-	10	1/2 NPTF	-	A
KX2068/2	-	10	3/8 NPTF	-	A
KX2068/5	-	10	1/4 NPTF	-	A
KX2068/7	-	10	M16x1,5	-	A
KX2068/8	-	10	M16x1,5	-	A
VA12A	-	11	M22x1,5	-	M

6.2 Water Separators

Part Number	Type No.	Fig.	Port Sizes		
			Supply	Delivery	
1031087000	-	12	M22x1,5	M16x1,5	
AC951A	-	13	M22x1,5	M22x1,5	

6.3 Condensers

Part Number	Type No.	Fig.	Port Sizes		Comment/Key
			Supply	Delivery	
0481019101000	-	14	M22x1,5	M22x1,5	D
1031065000	-		M18x1,5	M16x1,5	P
KZ1291/2	-	15	1/2" NPTF	1/2" NPTF	P, CV


7. Governor Valves



Key:

- Preferred Product

Fig. 1



GrF0413


Part Number	Type No.	Fig.	Port Sizes		Pressure [bar]		
			Supply	Delivery	Cut-out	Range	
109662	-						
1185145	-	1	1/8" NPTF	1/8" NPTF	8,8	0,8	
1186544	-	1	M10x1,0	M10x1,0	12,2	1,35	
1188780	-	1	M10x1,0	M10x1,0	10,2	0,95	
1189392	-	1	1/8" NPTF	1/8" NPTF	7,9	0,8	
1189393000	-	1	M10x1,0	M10x1,0	7,9	0,8	
1189394000	-	1	M10x1,0	M10x1,0	8,1	0,8	
1189395000	-	1	M10x1,0	M10x1,0	8,5	0,8	
1189396000	-	1	M10x1,0	M10x1,0	12,0	1,35	
1189489000	-	1	M10x1,0	M10x1,0	10,0	0,95	
267051	-	1	M10x1,0	M10x1,0	9,0	0,9	
267098	-	1	M10x1,0	M10x1,0	8,6	0,95	
269712	-	1	1/8" NPTF	1/8" NPTF	7,9	0,8	
269733	-	1	1/8" NPTF	1/8" NPTF	7,8	0,8	
274829	-	1	1/8" NPTF	1/8" NPTF	8,0	0,3	
275200	-	1	1/8" NPTF	1/8" NPTF	7,2	0,8	
275491	-	1	1/8" NPTF	1/8" NPTF	8,3	0,8	
275508	-	1	1/8" NPTF	1/8" NPTF	7,6	0,8	
277486	-	1	1/8" NPTF	1/8" NPTF	9,0	0,9	

8. Unloader Valves

8.1 Unloader Valves

Key:

- S** Has Port 2.2 M12x1,5 for signalling
- T** Tyre Inflator Port M16x1,5
- Preferred Product

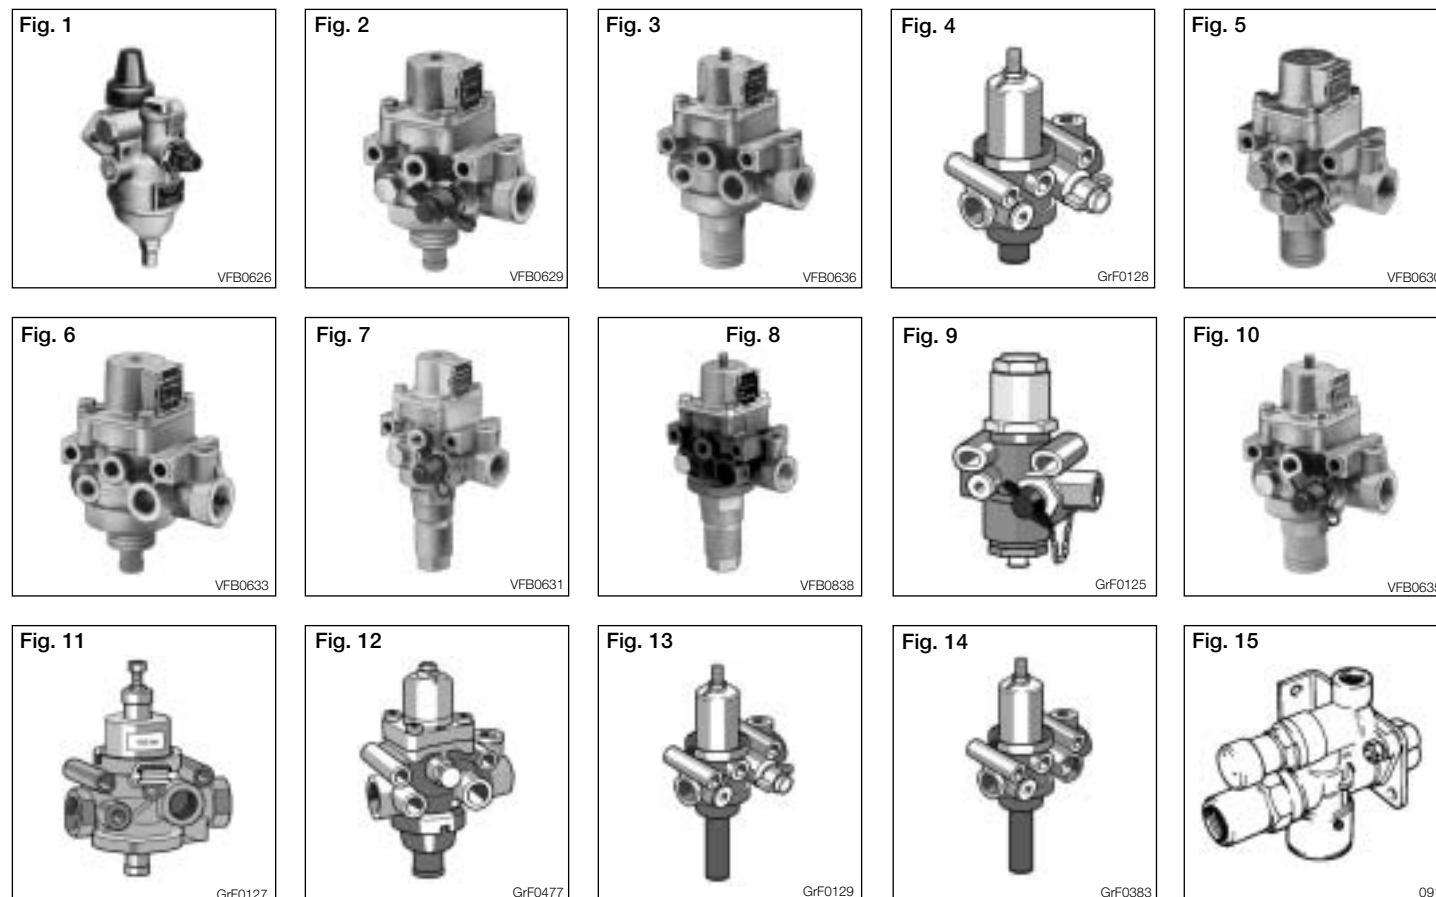

Part Number	Type No.	Fig.	Port Sizes		Pressures [bar]			Comment/Key
			Supply	Delivery	Cut-out	Cut-in	Safety Valve	
0481039011000	-	1	M22x1,5	M22x1,5	7,3	6,4	-	T
• 0481039013000	-	1	M22x1,5	M22x1,5	8,5	7,3	-	T
• 0481039201000	-	2	M22x1,5	M22x1,5	8,1	7,5	12,0	T,S
• 0481039202000	-	2	M22x1,5	M22x1,5	7,3	6,8	12,0	T,S
• 0481039203000	-	2	M22x1,5	M22x1,5	8,1	7,5	12,0	T,S
• 0481039204000	-	3	M22x1,5	M22x1,5	9,8	8,9	13,5	T,S
• 0481039205000	-	2	M22x1,5	M22x1,5	10,0	9,3	13,5	T,S
• 0481039206000	-	4	M22x1,5	M22x1,5	8,5	7,8	13,5	T,S
• 0481039208000	-	5	M22x1,5	M22x1,5	8,1	7,5	12,0	T,S
• 0481039209000	-	2	M22x1,5	M22x1,5	8,1	7,5	12,0	T,S
• 0481039210000	-	2	M22x1,5	M22x1,5	8,0	7,4	12,0	T
• 0481039211000	-	6	M22x1,5	M22x1,5	8,1	7,5	12,0	S
• 0481039213000	-	2	M22x1,5	M22x1,5	10,0	9,3	13,5	T,S
• 0481039214000	-	6	M22x1,5	M22x1,5	8,0	7,4	12,0	S
• 0481039215000	-	2	M22x1,5	M22x1,5	8,4	7,8	12,0	T
• 0481039216000	-	6	M22x1,5	M22x1,5	9,5	8,7	13,5	S
• 0481039218000	-	2	M22x1,5	M22x1,5	7,8	7,2	12,0	T
• 0481039219000	-	6	M22x1,5	M22x1,5	9,5	8,8	13,5	S
• 0481039220000	-	6	M22x1,5	M22x1,5	8,9	8,2	12,0	S

Part Number	Type No.	Fig.	Port Sizes		Pressures [bar]			Comment/Key
			Supply	Delivery	Cut-out	Cut-in	Safety Valve	
• 0481039221000	-	2	M22x1,5	M22x1,5	12,0	8,1	15,0	T,S
• 0481039222000	-	2	M22x1,5	M22x1,5	7,3	6,8	12,0	T,S
• 0481039224000	-	6	M22x1,5	M22x1,5	9,8	8,9	13,5	S
• 0481039225000	-	2	M22x1,5	M22x1,5	10,0	9,3	13,5	T,S
• 0481039228000	-	7	M22x1,5	M22x1,5	8,5	7,8	13,5	T,S
• 0481039234000	-	2	M22x1,5	M22x1,5	8,1	7,5	13,5	T,S
• 0481039235000	-	8	M22x1,5	M22x1,5	8,1	7,5	12,0	S
• 0481039240000	-	2	M22x1,5	M22x1,5	8,5	7,9	11,5	T,S
• 0481039241000	-	2	M22x1,5	M22x1,5	8,5	7,9	12,0	T,S
• 0481039252000	-	9	M22x1,5	M22x1,5	7,35	6,85	12,0	S (Ø6)
• 0481039253000	-	9	M22x1,5	M22x1,5	7,8	7,2	13,5	T,S
• 0481039257000	-	9	M22x1,5	M22x1,5	8,1	7,5	13,5	S
• 0481039258000	-	9	M22x1,5	M22x1,5	9,5	8,7	10,5	S
• 0481039259000	-		M22x1,5	M22x1,5	10,0	-	-	-
• 0481039268000	-		M22x1,5	M22x1,5	8,5	7,9	12,0	-
• 0481042201000	-	3	M22x1,5	M22x1,5	16,5	14,0	20,0	S
• 0481042202000	-	3	M22x1,5	M22x1,5	17,5	15,0	20,0	S
• 0481042205000	-	3	M22x1,5	M22x1,5	14,5	12,0	20,0	S
• 0481042207000	-	3	M22x1,5	M22x1,5	11,0	10,0	14,0	S
• 0481042208000	-	8	M22x1,5	M22x1,5	16,0	15,0	20,0	-
• 0481042209000	-	3	M22x1,5	M22x1,5	12,0	10,1	15,0	S
• 0481042210000	-		M22x1,5	M22x1,5	11,0	10,3	14,0	S
• 0481042211000	-	10	M22x1,5	M22x1,5	18,5	16,7	22,0	T,S
• 0481042212000	-	3	M22x1,5	M22x1,5	18,3	15,8	22,0	S
• 0481042214000	-	2	M22x1,5	M22x1,5	12,0	11,0	15,0	T,S
• 0481042221000	-		M22x1,5	M22x1,5	16,0	15,0	22,0	S
• 0481042223000	-	11	M22x1,5	M22x1,5	16,0	-	-	-
• 0481042225000	-		M22x1,5	M22x1,5	11,0	-	-	-
AC135AYZ	-	12	M22x1,5	M22x1,5	9,5	8,8	12,0	-
AC135AZ	-	12	M22x1,5	M22x1,5	9,5	8,8	12,0	-
AC135BXZ	-	4	M22x1,5	M22x1,5	7,8	7,2	12,0	T
AC135BZ	-	12	M22x1,5	M22x1,5	7,0	6,3	9,0	-
AC135CZ	-	12	M22x1,5	M22x1,5	8,5	7,9	12,0	-
AC135FXZ	-	4	M22x1,5	M22x1,5	8,1	7,5	12,0	T
AC135HYZ	-	12	M22x1,5	M22x1,5	11,0	10,3	15,5	-
AC135LYZ	-	12	M22x1,5	M22x1,5	12,5	11,6	17,0	-
AC136AZ	-	12	M22x1,5	M22x1,5	9,5	8,8	12,0	-
DR31RAK	-		M20x1,5	M20x1,5	7,5	6,5	10,5	-
DR31RCK	-				8,5			
DR31RDK	-		M20x1,5	M20x1,5	8,5	7,4	9,5	-
DR31REK	-		M20x1,5	M20x1,5	9,5	8,4	10,5	-
DR32A	-		M20x1,5	M20x1,5	9,5	8,4	10,5	-
DR32C	-					8,0		
DR32D	-		M20x1,5	M20x1,5	8,5	6,9	9,5	-
DR33A	-		M20x1,5	M20x1,5	9,5	8,4	10,5	-
DR33B	-		M20x1,5	M20x1,5	8,5	6,9	9,5	-
DR40A	-		M20x1,5	M20x1,5	9,5	8,4	10,5	-
DR40AA	-		M20x1,5	M20x1,5	9,5	8,4	10,5	-
DR40B	-				8,5			
I50138	DR2112	9	M22x1,5	M22x1,5	6,2	5,5	-	S

8.1 Unloader Valves

Part Number	Type No.	Fig.	Port Sizes		Pressures [bar]			Comment/Key
			Supply	Delivery	Cut-out	Cut-in	Safety Valve	
I82816	DR3513	13	M22x1,5	M22x1,5	8,1	7,5	13,0	T,S
I83644	DR3519	13	M22x1,5	M22x1,5	8,1	7,5	11,5	S
I86859	DR3526	13	M22x1,5	M22x1,5	12,5	11,5	-	S
I93257	DR3542	13	M22x1,5	M22x1,5	12,5	11,2	15,0	-
I94037	DR3546	13	M22x1,5	M22x1,5	8,1	7,5	-	T,S
I94038	DR3547	13	M22x1,5	M22x1,5	7,35	6,75	-	T,S
I94039	DR3548	13	M22x1,5	M22x1,5	7,35	6,75	-	T,S
I94761	DR3550	13	M22x1,5	M22x1,5	7,8	7,2	15,0	-
I94881	DR3551	13	M22x1,5	M22x1,5	10,0	9,0	-	S
II15406	DR3559		M22x1,5	M22x1,5	8,5	7,9	-	S
II19761	DR3570	13	M22x1,5	M22x1,5	8,1	7,5	-	T,S
II31471	DR3575	14	M22x1,5	M22x1,5	8,5	7,9	-	S
II37032	DR3576	14	M22x1,5	M22x1,5	8,5	7,9	-	S
II38784F	-							
SK2930/1	-	15	M22x1,5	M22x1,5	8,1	7,5	12,0	T

8.2 Relief Valve

Part Number	Type No.	Fig.	Port Sizes		
			Supply/Delivery	Exhaust	Control
I69281	AE1300		M22x1,5	Ø 16,5 mm	Ø 6 mm









9. Multi Circuit Protection Valves



Key:

- F Feedback with no Bypass
- F/B Feedback with Bypass
- N Non-feedback with no Bypass
- N/B Non-feedback with Bypass
- Preferred Product

Note: – Important –
These valves are not interchangeable



Part Number	Type No.	Fig.	Port Sizes		Circuits				
			Supply	Delivery	21	22	23	24	
0481027101000	-	1	M22x1,5	M22x1,5	N	F	-	-	
0481027102000	-	1	M22x1,5	M22x1,5	N	N	-	-	
0481027104000	-	1	M22x1,5	M22x1,5	N	N	-	-	
0481062104000	-	2	M22x1,5	M16x1,5	N	N	N	N	
0481062112000	-	2	M22x1,5	M16x1,5	N	N	N	N	
0481062114000	-	3	M22x1,5	M16x1,5	N	N	N	N	
0481062116000	-		M22x1,5	M22x1,5	N	N	N	N	
0481062301000	-	4	M22x1,5	M16x1,5	N	N	N	N	
0481062303000	-	4	M22x1,5	M16x1,5	N	N	N	N	
0481062307000	-	5	M22x1,5	M16x1,5	N	N	N	N	
0481062308000	-	5	M22x1,5	M16x1,5	N	N	N	N	
0481062309000	-	4	M22x1,5	M16x1,5	N	N	N	N	

Part Number	Type No.	Fig.	Port Sizes		Circuits				
			Supply	Delivery	21	22	23	24	
0481062310000	-	5	M22x1,5	M16x1,5	N	N	N	N	
0481062312000	-	4	M22x1,5	M16x1,5	N	N	N	N	
0481062317000	-	4	M22x1,5	M16x1,5	N	N	N	N	
0481062401000	-	6	M22x1,5	M16x1,5	N	N	N	N	
0481062405000	-	6	M22x1,5	M16x1,5	N	N	N	N	
0481062407000	-	7	M22x1,5	M16x1,5	N	N	N	N	
0481062408000	-	6	M22x1,5	M16x1,5	N	N	N	N	
0481062412000	-	6	M22x1,5	M16x1,5	N	N	N	N	
0481062413000	-	6	M22x1,5	M16x1,5	N	N	N	N	
443612074700	-		M22x1,5	M16x1,5	F	F	N	N	
443612074701	-		M22x1,5	M16x1,5	F	F	N	N	
443612074702	-		M22x1,5	M16x1,5	F	F	N	N	
443612074703	-		M22x1,5	M16x1,5	F	F	N	N	
443612074704	-		M22x1,5	M16x1,5	F	F	N	N	
443612074706	-		M22x1,5	M16x1,5	F	F	N	N	
I48227	AE4110		M22x1,5	M22x1,5	F	F	-	-	
I47836	AE4115	8	M22x1,5	M22x1,5	N/B	F/B	F	F	
I68180	AE4118	8	M22x1,5	M22x1,5	F/B	F/B	F	F	
I70615	AE4158	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I73329	AE4162	10	M22x1,5	M16x1,5	F/B	F/B	N	N	
I99810	AE4162	10	M22x1,5	M16x1,5	F/B	F/B	N	N	
I75300	AE4168	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I75596	AE4169	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I79444	AE4177	9	M22x1,5	M16x1,5	F/B	F/B	F	F	
I99811	AE4178	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I80509	AE4179	9	M22x1,5	M16x1,5	F/B	F/B	F	F	
I81192	AE4180	9	M22x1,5	M16x1,5	F/B	F/B	F	F	
I79379	AE4183	10	M22x1,5	M16x1,5	F/B	F/B	N	N	
II15591	AE4183	10	M22x1,5	M16x1,5	F/B	F/B	N	N	
I81272	AE4185	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I81510	AE4186	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I82587	AE4190	9	M22x1,5	M16x1,5	F/B	F/B	F	F	
I83313	AE4191	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
SEB00295	AE4196	11	M22x1,5	¹⁾	F	F	F	F	
I88768	AE4404	9	M22x1,5	M22x1,5	F/B	F/B	F	F	
I89408000	AE4405	9	M22x1,5	M16x1,5	N/B	N/B	N	N	
I90156	AE4407	9	M22x1,5	M16x1,5	F/B	F/B	F	F	
I92503	AE4409	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
I93648	AE4411	9	M22x1,5	M16x1,5	N/B	N/B	N	N	
II18172	AE4422	9	M22x1,5	M22x1,5	F/B	F	N	N	
II14296	AE4423	9	M22x1,5	M22x1,5	F/B	F/B	F	F	
II15587000	AE4427	9	M22x1,5	M16x1,5	N	N	F	F	
II15588000	AE4428	9	M22x1,5	M16x1,5	N	N	F	F	
II15080	AE4431	10	M22x1,5	M22x1,5	F/B	F/B	N	N	
II16098	AE4434	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
II17189	AE4437	9	M22x1,5	M22x1,5	F/B	F/B	F	F	
SEB01115	AE4440	9	M22x1,5	¹⁾	F/B	F/B	F	F	
II17791	AE4443	9	M22x1,5	M16x1,5	F/B	F/B	F	F	
II18167	AE4446	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
II18490	AE4447	9	M22x1,5	M16x1,5	F/B	F/B	N	N	

Part Number	Type No.	Fig.	Port Sizes		Circuits				
			Supply	Delivery	21	22	23	24	
II39775F	AE4447	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
II18754	AE4448	10	M22x1,5	M16x1,5	F/B	F/B	N	N	
SEB01251	AE4449		M22x1,5		F/B	F/B	F	F	
SEB01273	AE4450		M22x1,5		F/B	F/B	F	F	
SEB01274	AE4451		M22x1,5		F/B	F/B	F	F	
II31480000	AE4452	10	M22x1,5	M16x1,5	F/B	F/B	N	N	
II35525	AE4459	9	M22x1,5	M16x1,5	F/B	F/B	N	N	
K000055	AE4463	9	M22x1,5	M16x1,5	N/B	N/B	N	N	
• II37679	AE4502		M16x1,5	M22x1,5	F/B	F/B	N	N	
• II38677F	AE4503		M16x1,5	M22x1,5	F/B	F/B	N	N	
• II31163	AE4505	12	M22x1,5	M22x1,5	F/B	F/B	N	N	
• II38797F	AE4506	12	Voss NG12	Voss NG12	F/B	F/B	F	F	
• II37680	AE4510	12	Voss NG12	M22x1,5	F/B	F/B	F	F	
• II38745F	AE4516		M16x1,5	M22x1,5	F/B	F/B	N	N	
• II37922	AE4525		M22x1,5	M22x1,5	F/B	F/B	N	N	
• II39010F	AE4526		M22x1,5	M22x1,5	F/B	F/B	N	F/B	
• II37463	AE4527		M16x1,5	M22x1,5	F/B	F/B	N	N	
• II37464	AE4528		M22x1,5	M22x1,5	F/B	F/B	N	F/B	
• II38749F	AE4529		M22x1,5	M22x1,5	F/B	F/B	N	F/B	
• K001001	AE4534		M22x1,5	M22x1,5	F/B	F/B	N	N	
• II36011000	AE4603		M22x1,5	M16x1,5	F/B	F/B	N	N	
• II36012000	AE4604		M22x1,5	M16x1,5	F/B	F/B	F	F	
• II36650	AE4605	13	M22x1,5	-	F/B	F/B	F	F	
• II37461	AE4608		M16x1,5	M16x1,5	F/B	F/B	N	N	
• II37460	AE4609	14	M16x1,5	M16x1,5	F/B	F/B	N	N	
• II37462	AE4610		M22x1,5	M16x1,5	F/B	F/B	F	F	
• II33856	AE4611		M22x1,5	M16x1,5	F/B	F/B	F	F/B	
• II38801F	AE4612		M22x1,5	M16x1,5	F	F	N	N	
• II38802F	AE4613		M22x1,5	M16x1,5	F/B	F/B	F	F	
• II39140F	AE4615	15	M22x1,5	M16x1,5	F/B	F/B	N	N	
• II36154	AE4617		M22x1,5	M16x1,5	F/B	F/B	N	N	
• II40246F	AE4620	15	M22x1,5	M16x1,5	F/B	F/B	N	N	
• II40259F	AE4621		M22x1,5	M16x1,5	F	F	N	N	
• K000500	AE4623	15	Voss NG12	Voss NG12	F/B	F/B	N	N	
• K000516	AE4625	16	M22x1,5		F/B	F/B	F	F	
II36098	-		M22x1,5	M16x1,5					
II36150	-		M22x1,5	M16x1,5					
VPS30B	-	17	M22x1,5	M16x1,5	F	F	F	-	
VPS38AIY	-	17	1/2" NPTF	3/8" NPTF	N/B	N/B	F	-	
VPS38BIY	-	17	1/2" NPTF	3/8" NPTF	N/B	N/B	F/B	-	
VPS38BY	-	17	M22x1,5	M16x1,5	N/B	N/B	N	-	
VPS40AAY	-	17	M22x1,5	M16x1,5	F	F	N	N	
VPS40CY	-	17	M22x1,5	M16x1,5	F	F	N	N	
VPS41AY	-	17	M22x1,5	M16x1,5	F	F	F	F	
VPS41BY	-	17	M22x1,5	M16x1,5	F	F	F	F	
VPS41CY	-	17	M22x1,5	M16x1,5	F	F	F	F	
VPS45A	-	17	M22x1,5	M16x1,5	F	F	N	N	
VPS45AY	-	17	M22x1,5	M16x1,5	F	F	N	N	
VPS45BI	-	17	1/2" NPTF	3/8" NPTF	F	F	N	N	
VPS45B	-	17	M22x1,5	M16x1,5	F	F	N	N	

Part Number	Type No.	Fig.	Port Sizes		Circuits				
			Supply	Delivery	21	22	23	24	
VPS45C	-	17	M22x1,5	M16x1,5	F	F	N	N	
VPS45HY	-	17	M22x1,5	M16x1,5	F	F	N	N	
VPS45HYK	-	17	M22x1,5	M16x1,5	F	NF	F	F	
VPS46BB	-	17	M22x1,5	M16x1,5	F	F	F	F	
VPS48A	-	17	M22x1,5	M16x1,5	F	F	F	F	
VPS48AI	-	17	1/2" NPTF	3/8" NPTF	F	F	N	N	
VPS48B	-	17	M22x1,5	M16x1,5	N	N	F	F	
VPS48C	-	17	M22x1,5	M16x1,5	N	N	F	F	
VPS48D	-	17	M22x1,5	M16x1,5	N	N	N	N	
VPS48DI	-	17	1/2" NPTF	3/8" NPTF	F	F	N	N	
VPS48EIY	-	17	1/2" NPTF	3/8" NPTF	N/B	N/B	N/B	N/B	
VPS48FIY	-	17	1/2" NPTF	3/8" NPTF	N/B	N/B	N	F	
VPS48FY	-	17	M22x1,5	M16x1,5	N/B	N/B	N	N	
VPS48GIY	-	17	1/2" NPTF	3/8" NPTF	N/B	N/B	N	N	
VPS48GY	-	17	M22x1,5	M16x1,5	N	N	N	N	
VPS48H	-	17	M22x1,5	M16x1,5	F	F	N	F	
VPS48HI	-	17	1/2" NPTF	3/8" NPTF	F	F	N	F	
VPS48HYY	-	17	M22x1,5	M16x1,5	F/B	F/B	N/B	F/B	
VPS48LI	-	17	1/2" NPTF	3/8" NPTF	F	F	N	F	
VPS48MIY	-	17	1/2" NPTF	3/8" NPTF	F/B	F/B	N	N	
VPS48MY	-	17	M22x1,5	M16x1,5	F/B	F/B	N	N	
VPS48NIY	-	17	1/2" NPTF	3/8" NPTF	F/B	F/B	N	N	
VPS48NY	-	17	M22x1,5	M16x1,5	F/B	F/B	N	N	

¹⁾ Flange









Note: Important - These valves are not interchangeable

10. Pressure Protection Valves



Key:

- B With Backflow
- L Limited Backflow
- S Without Backflow
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		Pressure [bar]		Comment/Key	
			Supply	Delivery	Opening	Closing		
0481006012000	-	1	M16x1,5	M16x1,5	5,2		L	
0481063002000	-	2	M22x1,5	M22x1,5	4,5		B	
0481063004000	-	2	M22x1,5	M22x1,5	6,0		B	
0481063005000	-	2	M22x1,5	M22x1,5	6,5		B	
0481063006000	-	2	M22x1,5	M22x1,5	1,2		L	
0481063009000	-	2	M22x1,5	M22x1,5	5,5		L	
0481063010000	-	2	M22x1,5	M22x1,5	6,0		L	
0481063013000	-	2	M22x1,5	M22x1,5	5,5		S	
0481063021000	-	2	M22x1,5	M22x1,5	6,0		S	
0481063031000	-	2	M22x1,5	M22x1,5	7,0		S	
0481063037000	-	2	M22x1,5	M22x1,5	10,4		B	
0481063043000	-	2	M22x1,5	M22x1,5	7,8		L	
1111328000	-		G 3/8"J	G 3/8"J	4,0			
1111348000	-		M16x1,5	M16x1,5	4,0			
1111394000	-		G 3/8"J	G 3/8"J	5,0			
1111395000	-		G 3/8"J	G 3/8"J	5,0			
1111493000	-		M22x1,5	M22x1,5	5,6	5,0	L	
1111497000	-		M22x1,5	M22x1,5	5,6	5,0	L	
1111498000	-		M22x1,5	M22x1,5	6,5	5,8	L	
1111500000	-		M22x1,5	M22x1,5	5,6	5,0		
1111501000	-		M22x1,5	M22x1,5	7,5	6,8		
1111503000	-		M22x1,5	M22x1,5	6,1	5,5	L	
1111507000	-		M22x1,5	M22x1,5	6,1	5,5		
1111509000	-		M22x1,5	M22x1,5	9,7	8,7		
1111518000	-		1/8" NPT	Ø7,884	2,45			
217380	-	3	1/4" NPTF	1/4" NPTF	4,4	4,4	L	
228078	-	3	1/4" NPTF	1/4" NPTF	4,1	4,1	L	
271906	-	3	1/4" NPTF	1/4" NPTF	5,5	5,5	L	

Part Number	Type No.	Fig.	Port Sizes		Pressure [bar]		Comment/Key	
			Supply	Delivery	Opening	Closing		
274785	-	3	1/4" NPTF	1/4" NPTF	4,8	4,8	L	
275472	-	3	1/4" NPTF	1/4" NPTF	5,2	5,2	L	
277147	-	4	1/4" NPTF	1/4" NPTF	4,4			
277148	-	4	1/4" NPTF	1/4" NPTF	5,9	5,9	L	
277227	-	4	1/4" NPTF	1/4" NPTF	5,1			
277971	-	4	1/4" NPTF	1/4" NPTF	5,5			
288323	-		1/4" NPTF	1/4" NPTF	4,9	4,9		
I28847	DR4102	5	M22x1,5	M22x1,5	6,0		B	
I69841	DR4120	6	M22x1,5	M22x1,5	4,5	4,0	B	
I69843	DR4122	6	M22x1,5	M22x1,5	6,0	5,4	B	
I69846	DR4125	6	M22x1,5	M22x1,5	1)		B	
I75349	DR4128	6	M22x1,5	M22x1,5	5,5		B	
I75353	DR4132		M22x1,5	M22x1,5	7,8		B	
II36146	DR4135	6	M22x1,5	M22x1,5	10,0		B	
I36924	DR4206	5	M22x1,5	M22x1,5	4,5	4,0	L	
I69848	DR4230	6	M22x1,5	M22x1,5	4,5	4,0	L	
I69849	DR4231	6	M22x1,5	M22x1,5	3,5		L	
I69850	DR4232	6	M22x1,5	M22x1,5	6,0	5,1	L	
I69851	DR4233	6	M22x1,5	M22x1,5	1,1	1,0	L	
I69853	DR4235	6	M22x1,5	M22x1,5	6,2	5,6	L	
I69854	DR4236	6	M22x1,5	M22x1,5	1)		L	
I75355	DR4239	6	M22x1,5	M22x1,5	5,5	4,95	L	
I82402	DR4242	7	M22x1,5	M22x1,5	8,0	7,2	L	
I89125	DR4245	6	M22x1,5	M22x1,5	5,2	5,1	L	
• K000630	DR4256	7	M22x1,5	M22x1,5	6,0	5,0	L	
I27927	DR4301	5	M22x1,5	M22x1,5	6,0		S	
I33379	DR4305	5	M22x1,5	M22x1,5	5,5		S	
I41424	DR4309	5	M22x1,5	M22x1,5	6,2		S	
I71315	DR4331	5	M22x1,5	M22x1,5	7,0		S	
I69856	DR4340	6	M22x1,5	M22x1,5	4,5	4,1	S	
II30267	DR4341	6	M22x1,5	M22x1,5	6,0	5,4	S	
I69858	DR4342	6	M22x1,5	M22x1,5	4,0		S	
I69860	DR4344	6	M22x1,5	M22x1,5	5,0	4,5	S	
I69861	DR4345	6	M22x1,5	M22x1,5	5,5		S	
I69864	DR4348	6	M22x1,5	M22x1,5	6,2	5,6	S	
I69866	DR4350	6	M22x1,5	M22x1,5	1)		S	
I75356	DR4352	2	M22x1,5	M22x1,5	6,5		S	
I75358	DR4354	6	M22x1,5	M22x1,5	7,0		S	
I87006	DR4357	6	M22x1,5	M22x1,5	6,2		S	
II18067	DR4363	6	M22x1,5	M22x1,5	7,8		S	
• K000644	DR4378	7	M22x1,5	M22x1,5	6,0	5,0	S	
• K000645	DR4379	7	M22x1,5	M22x1,5	6,2	5,2	S	
SEB00028	DR4500		M22x1,5	M22x1,5	4,0		B	
SEB00026	DR4501	8	M16x1,5	M16x1,5	4,0		B	
SEB00684	DR4502	8	M16x1,5	M12x1,5	0,5		B	
I99797	-							
KW3999/1	-	9	3/8" NPTF	1/2"NPTF	6,2	6,2		
KW4081/1	-	9	3/8" NPTF	1/2"NPTF	6,2	6,2	L	
SKX1248/1	-	6	M22x1,5	M22x1,5	1)		2)	
VPC2B	-		M22x1,5	M22x1,5	4,2	3,5	L	

Part Number	Type No.	Fig.	Port Sizes		Pressure [bar]		Comment/Key	
			Supply	Delivery	Opening	Closing		
VPC2C	-		M22x1,5	M22x1,5	4,2	3,5	L	
VPC2G	-		M22x1,5	M22x1,5	5,3	4,7	L	
VPC2N	-		M22x1,5	M22x1,5	6,8	6,2	L	
VPC2P	-		M22x1,5	M22x1,5	5,5	4,9	L	
VPC2T	-		M22x1,5	M22x1,5	6,2	5,6	L	
VPC3A	-	6	M22x1,5	M22x1,5	7,4	6,8	L	
VPC3B	-	6	M22x1,5	M22x1,5	6,1	5,5	L	
VPC3D	-	6	M22x1,5	M22x1,5	4,8	4,4	L	
VPC3L	-	6	M22x1,5	M22x1,5	8,5	7,9	L	
VPC4A	-	6	M22x1,5	M22x1,5	7,4		S	
VPC4B	-	6	M22x1,5	M22x1,5	6,1		S	
VPC4D	-	6	M22x1,5	M22x1,5	4,4		S	
VPC4F	-	6	M22x1,5	M22x1,5	8,5		S	
VPC5D	-	6	M22x1,5	M22x1,5	11,3	11,0	B	
VPC6C	-		M22x1,5	M10x1,0	4,9	4,2	L	

¹⁾ Opening Pressure is adjustable from 1 to 10 bar, Closing Pressure is 0,9 x Opening Pressure

²⁾ Contains a **DR4350** plus Adapters

11. Pressure Limiting Valves

Key:

- A Safet Valve Pressure [bar]
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		Limited Pressure [bar]	A	Comment/Key	
			Supply	Delivery				
0481009014000	-	1	M16x1,5	M16x1,5	3,5			
0481009015000	-	1	M16x1,5	M16x1,5	5,0			
0481009016000	-	1	M16x1,5	M16x1,5	5,6			
0481009017000	-	1	M16x1,5	M16x1,5	5,9			
0481009018000	-	1	M16x1,5	M16x1,5	7,3			
0481009019000	-	2	M16x1,5	M16x1,5	7,3			
0481009020000	-	3	M16x1,5	M16&M12x1,5	9,5/7,3	10,5		
0481009021000	-	1	M16x1,5	M16x1,5	9,5	10,5		
0481009022000	-	1	M16x1,5	M16x1,5	7,3	10,5		
0481009023000	-	1	M22x1,5	M22x1,5	8,1			
0481009025000	-	1	M22x1,5	M22x1,5	7,2			
0481009026000	-	1	M22x1,5	M22x1,5	5,9			
0481009027000	-	1	M22x1,5	M22x1,5	5,6			
0481009029000	-	1	M16x1,5	M16x1,5	8,0			
0481009030000	-	1	M22x1,5	M22x1,5	7,4			
0481009032000	-	1	M16x1,5	M16x1,5	3,2			
0481009034000	-	1	M16x1,5	M16x1,5	2,4			
0481009036000	-	4	M12x1,5	M12x1,5	4,2			
0481009037000	-	4	M12x1,5	M12x1,5	0,4			
0481009039000	-	1	M16x1,5	M16x1,5	8,5			
• 0481009040000	-	1	M22x1,5	M22x1,5	7,5			
0481009042000	-	1	M22x1,5	M22x1,5	7,4	10,0		

Part Number	Type No.	Fig.	Port Sizes		Limited Pressure [bar]	A	Comment/Key	
			Supply	Delivery				
0481009043000	-		M16x1,5	M16x1,5	4,4			
0481009045000	-		M22x1,5	M22x1,5	6,8			
0481009047000	-	1	M22x1,5	M22x1,5	7,5			
0481009050000	-	1	M22x1,5	M22x1,5	7,4	10,0		
0481009051000	-	1	M16x1,5	M16x1,5	7,3			
0481009052000	-	1	M16x1,5	M16x1,5	6,5			
0481009055000	-	1	M22x1,5	M22x1,5	8,0			
• 0481009059000	-		M22x1,5	M22x1,5	7,0			
0481009061000	-	1	M16x1,5	M16x1,5	8,1	10,5		
0481009062000	-		M12x1,5	M12x1,5	6,0			
• 0481009063000	-	1	M22x1,5	M22x1,5	7,4			
• 0481009064000	-		M16x1,5	M16x1,5	8,0			
• 0481009065000	-		M22x1,5	M22x1,5	5,5			
0481009067000	-	1	M16x1,5	M16x1,5	5,6	7,5		
• 0481009069000	-		M22x1,5	M22x1,5	8,5			
0481009071000	-		M22x1,5	M22x1,5	2,0			
• 0481009101000	-	1	M16x1,5	M16x1,5	7,3			
• 0481009102000	-							
101916	-		1/4" NPTF	1/4" NPTF	3,8			
1111340000	-	5	M16x1,5	M16x1,5	2)			
1111341000	-	5	M16x1,5	M16x1,5	2,0			
1111375000	-	5	M16x1,5	M16x1,5	7,0			
1111378000	-	5	M16x1,5	M16x1,5	6,0			
1111381000	-	5	M16x1,5	M16x1,5	7,5			
1111382000	-	5	M16x1,5	M16x1,5	6,0			
1111383000	-	5	M16x1,5	M16x1,5	5,0			
1111384000	-	5	M16x1,5	M16x1,5	8,5			
1111385000	-	5	M16x1,5	M16x1,5	10,0			
1111387000	-	5	M16x1,5	M16x1,5	4,0			
1188664	-	6	1/4" PTF	1/4" PTF	3,0			
1188793	-	6	1/4" PTF	1/4" PTF	0,7			
1194325	-	6	1/4" PTF	1/4" PTF	6,5			
269753	-	6	1/4" PTF	1/4" PTF	7,6			
272902	-	6	1/4" PTF	1/4" PTF	1,0			
274958	-	6	1/4" NPTF	1/4" NPTF	4,8			
277144	-	6	1/4" NPTF	1/4" NPTF	5,5			
278427	-	6	1/4" PTF	1/4" PTF	3,5			
281857	-	6	1/4" PTF	1/4" PTF	1,4			
295035	-	6	1/4" PTF	1/4" NPTF	4,2			
295393	-	6	1/4" NPTF	1/4" NPTF	2,0			
295452	-	6	1/4" NPTF	1/4" NPTF	6,9			
443612086010	-							
AC150A	-	8	M12x1,25	M12x1,25	4,5			
AC150B	-	8	M12x1,25	M12x1,25	6,5			
AC150BK	-	8	M10x1,0	M10x1,0	6,5			
AC150E	-	8	M10x1,0	M10x1,0	4,5			
AC151A	-	9	M16x1,5	M16x1,5	7,5			
AC151B	-	9	M16x1,5	M16x1,5	6,0			
AC151D	-	9	M16x1,5	M16x1,5	8,3			
AC152AA	-	10	M22x1,5	M22x1,5	7,5			

Part Number	Type No.	Fig.	Port Sizes		Limited Pressure [bar]	A	Comment/Key	
			Supply	Delivery				
AC152DA	-	10	M22x1,5	M22x1,5	7,3			
AC152DX	-	10	M22x1,5	M22x1,5	7,3			
AC152HA	-	10	M22x1,5	M22x1,5	3,0			
AC152LA	-	10	M22x1,5	M22x1,5	8,0			
AC154A	-		M22x1,5	M22x1,5	7,5			
AC155A	-	11	M16x1,5	M16x1,5	7,3			
AC155B	-	11	M16x1,5	M16x1,5	8,0			
AC155C	-	11	M16x1,5	M16x1,5	9,0			
AC155D	-	11	M16x1,5	M16x1,5	5,4			
AC155E	-	11	M16x1,5	M16x1,5	6,5			
AC155F	-	11	M16x1,5	M16x1,5	3,0			
AC155FA	-	11	M16x1,5	M16x1,5	3,0			
AC155G	-	11	M16x1,5	M16x1,5	10,3			
• AC156A	-	11	M16x1,5	M16x1,5	7,5	9,0		
• AC156B	-	11	M16x1,5	M16x1,5	8,5	10,0		
• AC156C	-	11	M16x1,5	M16x1,5	9,5	11,0		
• AC156D	-	11	M16x1,5	M16x1,5	6,7	8,5		
• AC156E	-	11	M16x1,5	M16x1,5	11,0	13,0		
• AC157A	-		M22x1,5	M22x1,5	7,5	9,0		
• AC157B	-	11	M22x1,5	M22x1,5	4,0	5,5		
• AC157C	-		M22x1,5	M22x1,5	8,0	9,5		
AC157D	-		M22x1,5	M22x1,5	8,0	9,5		
• AC157E	-		M22x1,5	M22x1,5	5,5	7,0		
• AC157F	-		M22x1,5	M22x1,5	9,5	11,0		
• AC157G	-		M22x1,5	M22x1,5	4,2	5,7		
AC157H	-		M22x1,5	M22x1,5	4,0	5,5		
• AC157L	-		M22x1,5	M22x1,5	3,6	5,1		
• AC157M	-		M22x1,5	M22x1,5	7,0	8,5		
AC157N	-		M22x1,5	M22x1,5	9,8	11,3		
• AC157P	-		M22x1,5 ³⁾	M22x1,5 ³⁾	10,0	11,5		
I61235	DB1102	12	M22x1,5	M22x1,5	5,7			
• I61236	DB1103	12	M22x1,5	M22x1,5	5,3			
I22144	DB1104		M22x1,5	M22x1,5	7,5			
• I61237	DB1105	12	M22x1,5	M22x1,5	4,8			
I61240	DB1113	12	M22x1,5	M22x1,5	7,35			
• I61241	DB1114	12	M22x1,5	M22x1,5	1,0			
• I61707	DB1116	12	M22x1,5	M22x1,5	3,5			
I83747	DB1143	12	M22x1,5	M22x1,5	8,0			
I86170	DB1145	12	M22x1,5	M22x1,5	7,8			
• I97953	DB1147	12	M22x1,5	M22x1,5	1,8			
I79644	DB1151	13	M16x1,5	M16x1,5	3,5			
I84927	DB1159	13	M16x1,5	M16x1,5	3,2			
SEB00440	DB1230		M22x1,5	M22x1,5	7,5			
SEB00441	DB1231		M22x1,5	M22x1,5	7,5			
SEB00457	DB1232		M22x1,5	M22x1,5	7,5			
SEB00458	DB1233		M22x1,5	M22x1,5	4,0			
SEB00624	DB1234		M22x1,5	M22x1,5	8,0			
SEB00638	DB1235		M22x1,5	M22x1,5	6,5			
SEB01183	DB1237	13	M22x1,5	M22x1,5	8,0			
SEB01204	DB1238	13	M22x1,5	M22x1,5	8,0			

11. Pressure Limiting Valves

Part Number	Type No.	Fig.	Port Sizes		Limited Pressure [bar]	A	Comment/Key	
			Supply	Delivery				
SEB01224	DB1239		M22x1,5	M22x1,5	4,0			
SEB01258	DB1240		M22x1,5	M22x1,5	8,0			
SEB01476	DB1246		M22x1,5	M22x1,5	4,4			
SEB01487	DB1248		M22x1,5	M22x1,5	4,2			
I69964	DMDV-01		ISO228-G1/8	ISO228-G1/8				
I7178305	-		M22x1,5	M12x1,5	0,5			
KX2045/11000	-	6	M12x1,5	M12x1,5	3,9			
KX2045/12000	-	6	1/4" NPTF	1/4" NPTF	3,9			
KX2045/14000	-	6	M12x1,5	M12x1,5	2,3			
KX2045/15000	-	6	M12x1,5	M12x1,5	1,3			
KX2045/16000	-	6	M12x1,5	M12x1,5	7,5			
KX2045/17000	-	6	M12x1,5	M12x1,5	2,0			
KX2045/18000	-	6	M12x1,5	M12x1,5	3,0			
SEB01237	-							
SKX542/1 ¹⁾	-	14	M16x1,5	M16x1,5	²⁾			

¹⁾ Contains **0481009014000** plus Adapters

²⁾ Adjustable from 1 to 8 bar

³⁾ ISO Ports

12. Foot Brake Valves

Key:

E With Microswitch
IS Integral Silencer
T With Treadle

A Front axle modulation ratio
B Limited delivery pressure [bar]
• Preferred Product

Fig. 1



VFB0573

Fig. 2



VFB0574

Fig. 3



VFB0556

Fig. 4



VFB0557

Fig. 5



VFB0558

Fig. 6



VFB0559

Fig. 7



VFB0560

Fig. 8



VFB0561

Fig. 9



VFB0719

Fig. 10



VFB0563

Fig. 11



VFB0565

Fig. 12



VFB0564

Fig. 13



VFB0826

Fig. 14



VFB0910

Fig. 15



VFB0566

Fig. 16



VFB0567

Fig. 17



VFB0827

Fig. 18



VFB0568

Fig. 19



VFB0569

Fig. 20



VFB0828

Fig. 21



VFB0570

Fig. 22



VFB0911

Fig. 23




VFB0553

Fig. 24



VFB0571

Fig. 25



GrF0008

Fig. 26



314

Fig. 27



301

Fig. 28



GrF0472

Fig. 29




GrF0189

Fig. 30



GrF0481

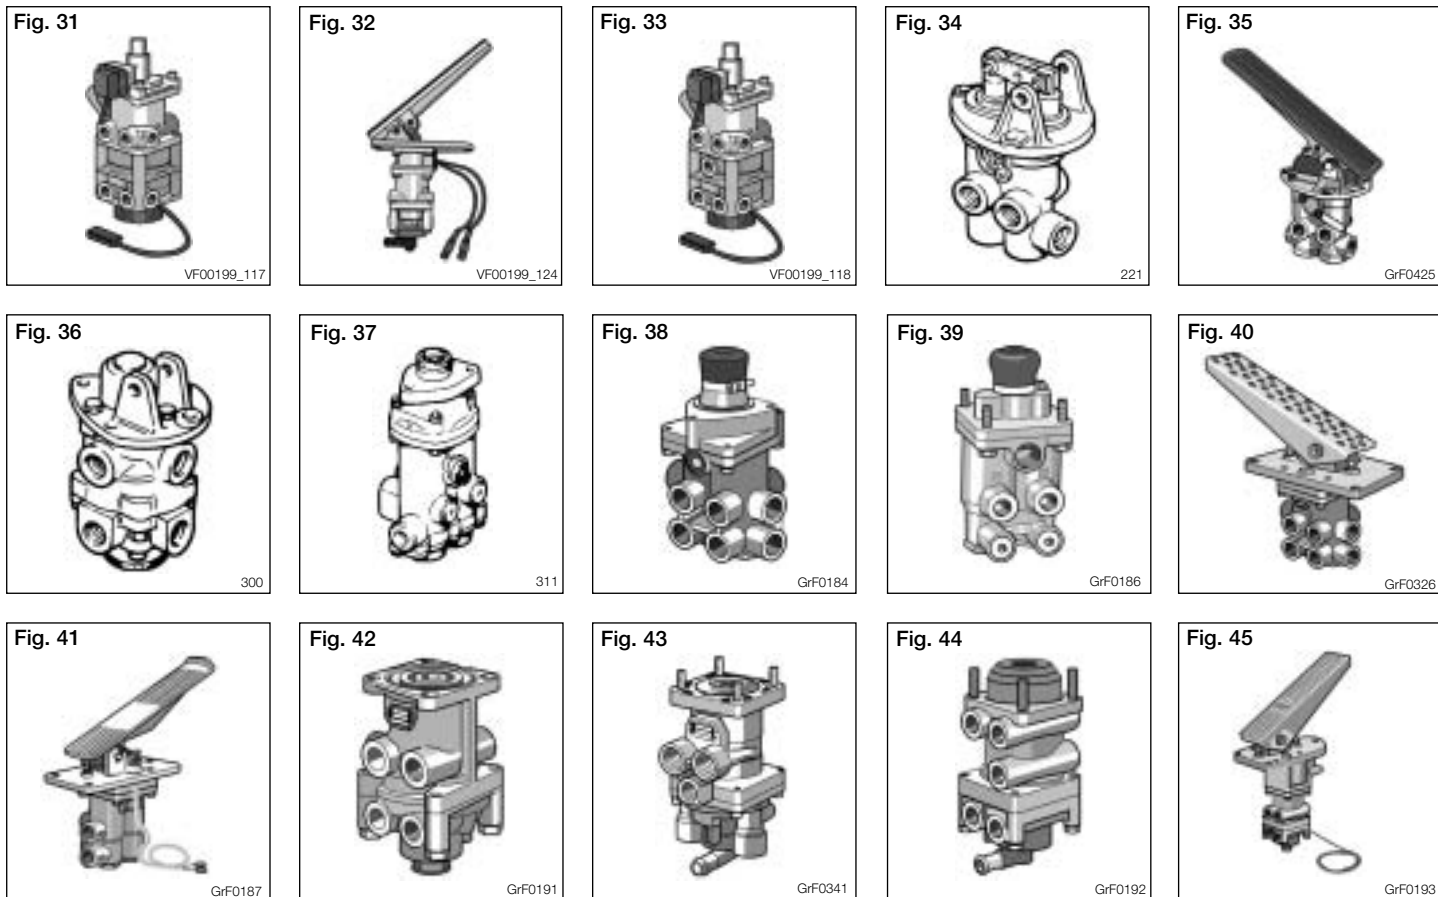

Part Number	Type No.	Fig.	Port Sizes		A	B	Comment/Key	
			Supply	Delivery				
0481008104000	-	1	M16x1,5	M16x1,5				
0481008106000	-	2	M16x1,5	M16x1,5				
0481064002000	-	3	M16x1,5	M16x1,5				
0481064003000	-	4	M16x1,5	M16x1,5				
0481064004000	-		M16x1,5	M16x1,5				
0481064005000	-	5	M16x1,5	M16x1,5				
0481064006000	-	5	M16x1,5	M16x1,5				
0481064007000	-	6	M16x1,5	M16x1,5			2)	
0481064011000	-	7	M16x1,5	M16x1,5				
0481064012000	-	7	M16x1,5	M16x1,5				
0481064013000	-	8	M16x1,5	M16x1,5				
0481064016000	-	9	M16x1,5	M16x1,5				
0481064017000	-	9	M16x1,5	M16x1,5				
0481064102000	-	5	M16x1,5	M16x1,5				
0481064103000	-	10	M22x1,5	M22x1,5				
0481064106000	-	10	M22x1,5	M22x1,5				
0481064108000	-	5	M16x1,5	M16x1,5				
0481064110000	-	11	M16x1,5	M16x1,5				
0481064113000	-	10	M22x1,5	M22x1,5				
0481064115000	-	12	M16&M12x1,5	M16x1,5				
0481064117000	-		M16x1,5	M16x1,5				
0481064118000	-	13	M16x1,5	M16&M12x1,5				
0481064121000	-	14	M22x1,5	M22x1,5				
0481064122000	-	10	M22x1,5	M22x1,5				

Part Number	Type No.	Fig.	Port Sizes		A	B	Comment/Key	
			Supply	Delivery				
0481064201000	-	15	M16x1,5	M16&M12x1,5	1,5:1			
0481064202000	-	15	M16x1,5	M16&M12x1,5	2,0:1			
0481064205000	-	16	M22x1,5	M16&M12x1,5	1,5:1			
0481064206000	-	16	M22x1,5	M16&M12x1,5	2,0:1			
0481064209000	-	11	M16x1,5	M22&M16x1,5	2,0:1			
0481064210000	-	11	M16x1,5	M22&M16x1,5	2,7:1			
0481064211000	-	16	M22x1,5	M22&M16x1,5	1,5:1			
0481064301000	-	17	M16x1,5	M16x1,5				
0481064303000	-	18	M16x1,5	M16x1,5				
0481064401000	-	19	M16x1,5	M16x1,5			T	
0481064405000	-	20	M16&M12x1,5	M16x1,5			T	
0481064601000	-	21	M16&M12x1,5	M16x1,5				
0481064602000	-	22	M16&M12x1,5	M16x1,5				
0481064603000	-	23	Ø12	Ø12				
0481064701000	-	24	M16&M12x1,5	M16&M12x1,5				
0481064702000	-	24	M16&M12x1,5	M16&M12x1,5				
0481064703000	-	24	M16&M12x1,5	M16&M12x1,5				
1023194000	-		M16x1,5	M16x1,5		8,0		
1023275000	-		M18x1,5	M18x1,5		8,0		
1023277000	-		M18x1,5	M18x1,5		8,0		
1023280000	-		M18x1,5	M18x1,5		7,0		
1023285000	-		M18x1,5	M18x1,5		8,0		
1023288000	-		M18x1,5	M18x1,5		8,0		
1023295000	-		M18x1,5	M18x1,5		8,0		
1023298000	-	25	M18x1,5	M18x1,5		8,0		
102607	-		3/8" NPTF	3/8" NPTF			T	
1188768	-		M16x1,5	M16x1,5		9,0		
1189389	-	26	M16x1,5	M16x1,5				
1189492	-		M16x1,5	M16x1,5		8,0		
267077	-		M16x1,5	M16x1,5				
269752	-	27	3/8" NPTF	3/8" NPTF				
279750	-		1/2" NPTF	1/2" NPTF				
286171	-		3/8" NPTF	3/8" NPTF				
286880	-		3/8" NPTF	3/8" NPTF			T	
295579	-	26	3/8" NPTF	3/8" NPTF				
443612226003	-							
443612226005	-							
443612226007	-							
443612226013	-							
443612226016	-							
443612229000	-							
443612230002	-							
443612241000	-							
443612241003	-							
I77997	BF-1/1		M14x1,5	M14x1,5	-	5,3	T	
I88682	BF-1/2		M14x1,5	M14x1,5	-	7,35	T	
DX10A	-	28	M20x1,5	M20x1,5		7,6		
DX16D	-	28	M20x1,5	M20x1,5		7,6		
DX16DY	-	28	M20x1,5	M20x1,5		7,6	E	
DX18A	-	28	M14x1,5	M14x1,5		6,5		

Part Number	Type No.	Fig.	Port Sizes		A	B	Comment/Key	
			Supply	Delivery				
DX19A	-	28	M18x1,5	M18x1,5		7,0		
DX19B	-	28	M20x1,5	M20x1,5		6,8		
DX20A	-		M20&M16x1,5	M20&M16x1,5		7,6		
DX25A	-	28	M14x1,5	M14x1,5		6,5		
DX26A	-	28	M20x1,5	M20x1,5		7,6		
DX26B	-	28	M20x1,5	M20x1,5		7,6	E	
DX28A	-	28	M20x1,5	M20x1,5		7,6		
DX31A	-	28	M14x1,5	M14x1,5		7,6		
DX35A	-		M22&M12x1,5	M22&M12x1,5		7,2	T,E	
DX36B	-		M22x1,5	M22x1,5		7,6	E	
DX50AX	-	28	M16x1,5	M16x1,5		7,6	E	
DX51AX	-	28	M16x1,5	M16x1,5		7,6	E	
DX51CX	-	28	M16x1,5	M16x1,5		7,6	E	
DX52BY	-	28	M16x1,5	M16x1,5		7,6	E	
DX53AX	-	28	M16x1,5	M16x1,5		6,5	E	
• DX60A	-		1)	1)			E	
• DX61A	-		M22x1,5	M22x1,5				
DX65A	-		1)	1)		7,6	E	
• DX65B	-		M16x1,5	M16x1,5		7,6	E	
DX70C	-	29	M16&M12x1,5	M16&M12x1,5				
DX71A	-	29	M16x1,5	M16x1,5				
DX71BY	-	29	M16x1,5	M16x1,5				
DX75BA	-	30	M16x1,5	M16x1,5		7,6		
DX75BAY	-	31	M16x1,5	M16x1,5		7,6	E, IS	
DX75BX	-	30	M16x1,5	M16x1,5		7,6	E	
DX75BXY	-		M16x1,5	M16x1,5		7,6	E, IS	
DX80D	-	32	M16&M12x1,5	M16&M12x1,5			T,E	
DX80E	-		M16x1,5	M16x1,5			E	
DX81D	-		M16x1,5	M16x1,5			E	
DX81E	-		M16x1,5	M16x1,5		7,5	E	
DX95B	-	30	M16x1,5	M16x1,5	1:1,5	7,6		
DX95BX	-	30	M16x1,5	M16x1,5	1:1,5	7,6	E	
DX95BXY	-		M16x1,5	M16x1,5	1:1,5	7,6	E, IS	
DX95BY	-	33	M16x1,5	M16x1,5	1:15	7,6	E, IS	
DX95E	-	30	M16x1,5	M16x1,5	1:2,7	7,6	E, IS	
DX95EX	-	30	M16x1,5	M16x1,5	1:2,7	7,6	E, IS	
DX95EXY	-		M16x1,5	M16x1,5	1:2,7	7,6	E, IS	
DX95EY	-		M16x1,5	M16x1,5	1:2,7	7,6	E, IS	
DX95F	-	30	M16x1,5	M16x1,5	1:2,0	7,6		
DX95FX	-	30	M16x1,5	M16x1,5	1:2,0	7,6	E	
DX95FX Y	-		M16x1,5	M16x1,5	1:2,0	7,6	E, IS	
DX95FY	-		M16x1,5	M16x1,5	1:2,0	7,6	E, IS	
DX9A	-	28	M14x1,5	M14x1,5		6,5		
DX9D	-		M14x1,5	M14x1,5		6,5		
I69434A	FB11							
I874851	-		M14x1,5	M14x1,5	-	Hydr.	T	
II36090	-							
KX1101/1	-		1/2" NPSF	1/2" NPSF		6,3		
KX2408/1	-	34	1/2" NPSF	1/2" NPSF				
KY1396/1	-	35	1/2" NPSF	1/2" NPSF			T	

Part Number	Type No.	Fig.	Port Sizes		A	B	Comment/Key	
			Supply	Delivery				
KY1767/11	-	36	3/8" NPTF	3/8" NPTF				
KY1767/4	-	36	3/8" NPTF	3/8" NPTF				
KY1767/5	-	36	3/8" NPTF	3/8" NPTF				
KY1767/9	-	36	3/8" NPTF	3/8" NPTF				
KY1916/1	-	35	3/8" NPTF	3/8" NPTF			T	
KY1916/3	-	35	M16x1,5	M16x1,5			T	
KY2571/2	-	35	M16x1,5	M16x1,5		8,0	T	
KY930/4	-	37	1/2" NPTF	1/2" NPTF				
KY930/5	-	37	1/2" NPTF	1/2" NPTF				
KZ1210/1	-	35	3/8" NPTF	3/8" NPTF			T	
• I72775	MB1200		M22x1,5	M22x1,5	-	6,0	T	
I72776	MB1201		M22x1,5	M22x1,5		4,5	T	
I83692	MB1211		M22x1,5	M22x1,5		7,35	T	
• I73207A	MB1220		M22x1,5	M22x1,5	-	7,35	T	
• I79513	MB1222		M22x1,5	M22x1,5	-	7,35	T	
• I77905	MB1223		M22x1,5	M22x1,5	-	8,0	T	
• I88650	MB1224		M22x1,5	M22x1,5	-	8,0	T	
II16361	MB1226		M22x1,5	M22x1,5	-	8,0	T	
I81796	MB4415		M16x1,5	M16x1,5		8,0	T	
I55719	MB4419	38	M22x1,5	M22x1,5		8,0	T	
I67226	MB4427	39	M16x1,5	M16x1,5		8,3		
I55724	MB4428	39	M16x1,5	M16x1,5		8,0		
II32091	MB4434	39	M16x1,5	M16x1,5		8,3		
I82111	MB4436	38	M22&M12x1,5	M22&M12x1,5	-	9,5		
I72791	MB4510	40	M22x1,5	M22x1,5	-	8,0	T,E	
I55727	MB4512	40	M16x1,5	M16x1,5	-	8,0	T	
I72780	MB4514	40	M16x1,5	M22x1,5	-	8,0	T	
I83874	MB4518	41	M22x1,5	M22x1,5	-	7,5	T,E	
I74054	MB4523	40	M22x1,5	M22x1,5		8,0	T	
SEB00480	MB4611	29	M16x1,5	M16x1,5		7,9		
SEB01098	MB4611	29	M16x1,5	M16x1,5		7,9		
SEB01145	MB4613		M16x1,5	M16x1,5	-	8,0		
SEB01343	MB4614		M16x1,5	M16x1,5	-	8,0		
I74907	MB4630	29	M16x1,5	M16x1,5	-	8,5		
I76410	MB4631	29	M16x1,5	M16x1,5	-	8,0		
I81712	MB4636	29	M16x1,5	M16x1,5		8,5		
I93304	MB4643	42	M16x1,5	M16x1,5		10,0		
I97388	MB4648	42	M22x1,5	M22x1,5		8,0		
I83641	MB4653	16	Voss NG12	Voss NG12	1:1,5	8,5		
I83642	MB4654	43	M22x1,5	M22x1,5	1:2	8,5		
I89387	MB4657	43	Voss NG12	Voss NG12	1:2	8,0		
I92238	MB4658	44	M16x1,5	M16x1,5	1:2	8,5		
I93189	MB4661	43	M22x1,5	M22x1,5	1:1,25	10,0		
SEB01481	MB4665		M16x1,5	M16x1,5	-	8,0	E	
SEB00683	MB4665		M16x1,5	M16x1,5	-	8,0	E	
I84103	MB4676	44	M16x1,5	M16x1,5	1:2	8,5		
SEB00631	MB4691		M16&M12x1,5	M16&M12x1,5	-	8,0		
II36045	MB4694	42	M22x1,5	M22x1,5		10,0		
SEB01120	MB4697		M22&M16x1,5	M22&M16x1,5		8,0		
SEB01205	MB4699		M22&M16x1,5	M22&M16x1,5		7,9		

12. Foot Valves

Part Number	Type No.	Fig.	Port Sizes		A	B	Comment/Key	
			Supply	Delivery				
I74971	MB4710		M22x1,5	M22x1,5		8,0	T,E	
I74972	MB4711	45	M22x1,5	M22x1,5		8,3	T,E	
I74789	MB4712	32	M22x1,5	M22x1,5		8,0	T,E	
• I89741	MB4745	45	M16x1,5	M16x1,5		8,5	T,E	
I89742	MB4747	45	M16x1,5	M16x1,5	-	8,5	T,E	
II15741	MB4753	45	M16x1,5	M16x1,5		8,5	T	
II16472	MB4754		M16x1,5	M16x1,5	-	8,5	T,E	
II33920	MB4760	45	M16x1,5	M16x1,5		8,5	T,E	
• II34754	MB4761	45	M16x1,5	M16x1,5	-	8,0	T,IS	
• II36058	MB4762		M16x1,5	M16x1,5		8,0	T,E	
II36060	MB4763		M16x1,5	M16x1,5	-	8,0	T,E,IS	
• II36092	MB4765		M16x1,5	M16x1,5	-	8,0	T,IS	
II16465	MB4800	44	Voss NG12	Voss NG12	-	8,0		
II16537	MB4803	44	M16x1,5	M16x1,5	1:2,7	8,5		
II16538	MB4804	44	M16x1,5	M16x1,5	1:2	8,5		
II16539	MB4805	13	M16x1,5	M16x1,5		8,5		
II16692	MB4806		M16x1,5	M16x1,5	-	8,5		
II18787	MB4811	44	Voss NG12	Voss NG12	1:2	10,5		
II18788	MB4812	44	M22x1,5	M22x1,5	1:2,7	10,5		
• II36364	MB4813		Voss NG12	Voss NG12	1:2	10,5		
II36365	MB4814		Voss NG12	Voss NG12	1:2,7	10,5		
II36302	MB4815		Voss NG12	Voss NG12	1:1,5	10,5		
• II19090	MB4815		Voss NG12	Voss NG12	1:1,5	10,5		
II36074	MB4819	44	M16x1,5	M16x1,5	1:2,7	8,5		
II36300	MB4820	44	Voss NG12	Voss NG12	1:2	10,5		
II36299	MB4821	44	Voss NG12	Voss NG12	1:1,5	10,5		
II35372	MB4825		Voss NG12	Voss NG12	1:2,7	10,5		
• II35375	MB4828	44	Voss NG12	Voss NG12	1:1,5	10,5		
II36293	MB4833		Voss NG12	Voss NG12	1:2,7	10,5		
• II36295	MB4835		Voss NG12	Voss NG12	1:2	10,5		
• II36296	MB4836		Voss NG12	Voss NG12	1:2,7	10,5		
II36297	MB4837		Voss NG12	Voss NG12	1:1,5	10,5		
II36298	MB4838		Voss NG12	Voss NG12	1:2,7	10,5		
• II36301	MB4841		Voss NG12	Voss NG12	1:2,7	10,5		
II36096	MB4846		M16&M12x1,5	M16&M12x1,5		8,5		
II36174000	MB4849		M16&M12x1,5	M16&M12x1,5		8,5		
K000014	MB4850		M16x1,5	M16x1,5	-	8,0	E	
K000238	MB4851	29	M16x1,5	M16x1,5	-	10,0		
I27712	MB7103		M14x1,5	M14x1,5			T	
I77633	MB7107		M14x1,5	M14x1,5		7,3	T	

¹⁾ Flange M16

²⁾ Hydraulic signal Port M14x1,0

13. Hand Control Valves



Key:

BI	Conical Handle	TO	Round Handle
FE	Hexagonal Flange	TS	Locking Handle
FR/A	Square Flange, Top Mounting		
FR/B	Square Flange, Bottom Mounting		
INT	With Microswitch		
LD	Right Hand		
LS	Left Hand		
MB	Inverse Function with Test Position		
MO	Inverse Function		
MT	Inverse Function with Test Position and Emergency Release Device		
MX	Inverse Function with Emergency Release Device		
RI	ISO Ports		
RV	Voss Ports		
•	Preferred Product		

Fig. 1



VFB0575

Fig. 2



VFB0577

Fig. 3



VFB0578

Fig. 4



VFB0581

Fig. 5



VFB0579

Fig. 6



VFB0580

Fig. 7



VFB0583

Fig. 8



VFB0585

Fig. 9



VFB0584

Fig. 10



VFB0587

Fig. 11



VFB0914

Fig. 12



VFB0923

Fig. 13



VFB0925

Fig. 14



VFB0589

Fig. 15



VFB0823

Fig. 16



VFB0014

Fig. 17



VFB0824

Fig. 18



VFB0015

Fig. 19



VFB0016

Fig. 20



331

Fig. 21



GrF0427

Fig. 22



GrF0523

Fig. 23



VF00199_116

Fig. 24




GrF0487

Fig. 25



GrF0321

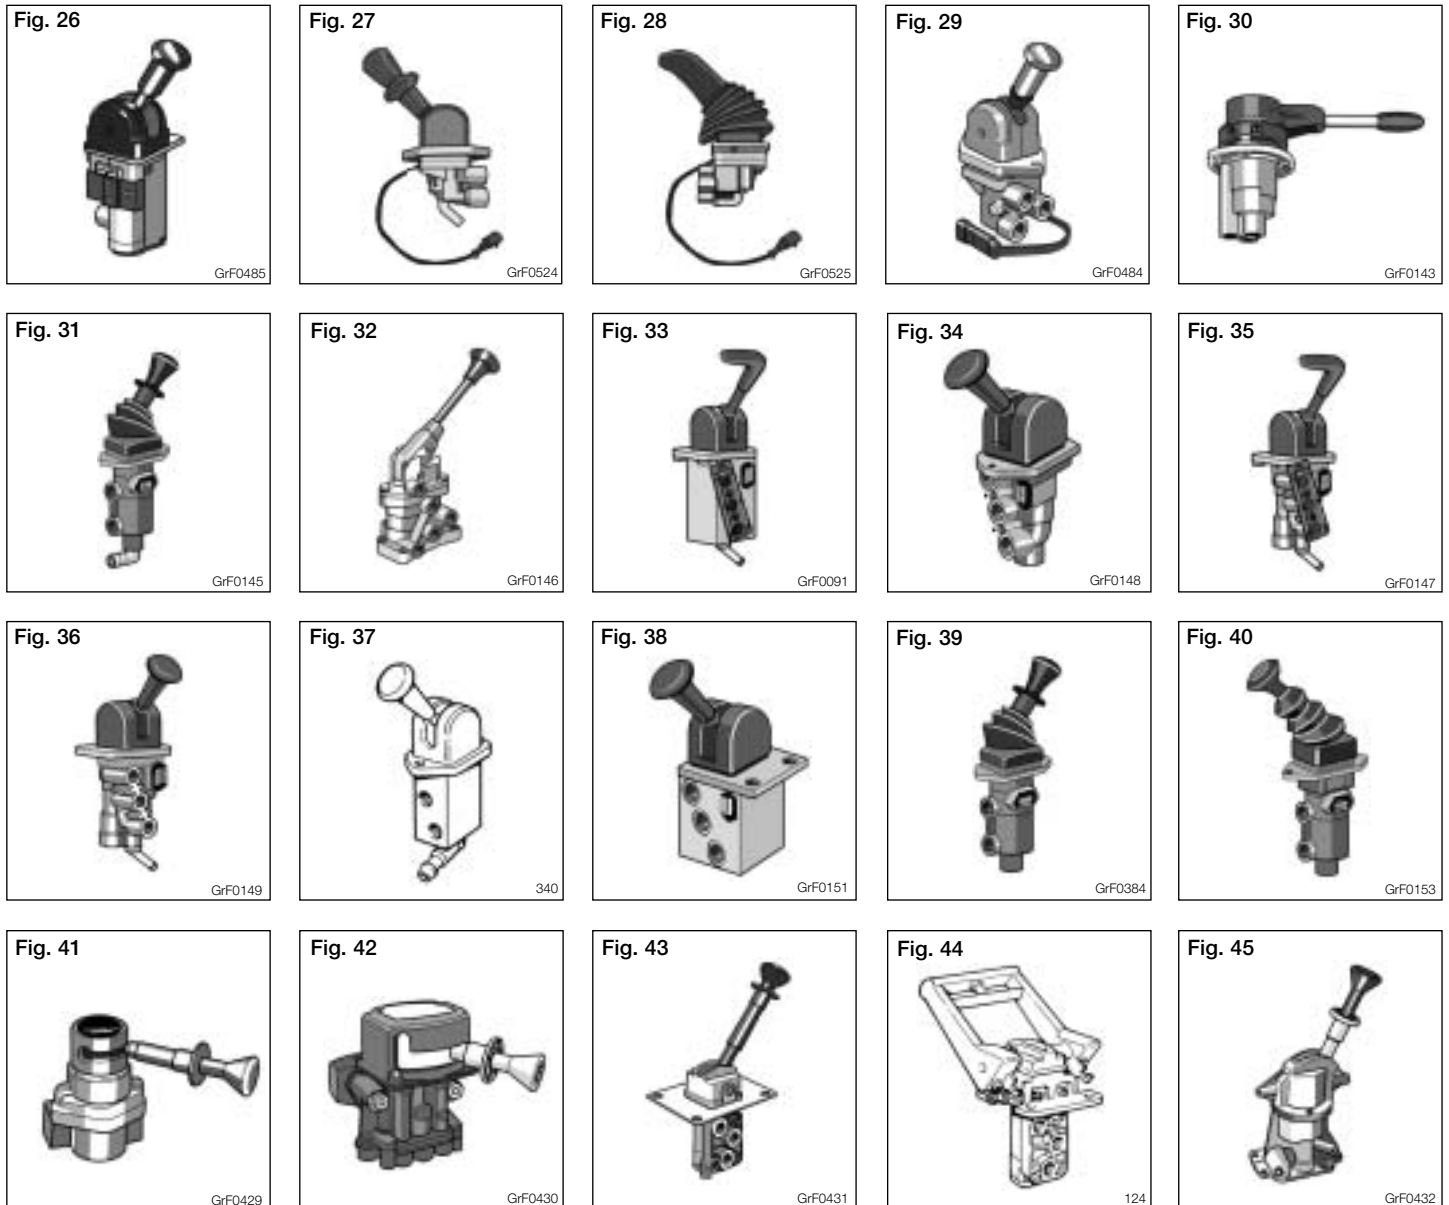

Part Number	Type No.	Fig.	Port Sizes		Comment/Key	
			Supply	Delivery		
0481003007000	-	1	M22x1,5	M22x1,5		
0481016016000	-		M16x1,5	M16x1,5		
0481016019000	-	2	M14x1,5	M14x1,5	MO,FE,TO	
0481016023000	-		M16x1,5	M16x1,5		
0481016106000	-	3	M14x1,5	M14x1,5	MO,FR/A,TO	
0481016107000	-	3	M14x1,5	M14x1,5		
0481016108000	-	4	2)	2)	MO,FR/A	
0481016112000	-	5	M14x1,5	M14x1,5		
0481016113000	-	6	M16x1,5	M16x1,5	MO	
0481016114000	-	6	M16x1,5	M16x1,5	MO	
0481016115000	-	5	M14x1,5	M14x1,5	MO,FE,TO	
0481016117000	-	5	M16x1,5	M16x1,5		
0481016201000	-	7	M14x1,5	M14x1,5		
0481016202000	-	8	2)	2)		
0481016203000	-	8	2)	2)		
0481016204000	-	9	M14x1,5	M14x1,5		
0481016206000	-	10	M16x1,5	M16x1,5	MT	
0481016207000	-	10	M16x1,5	M16x1,5		

Part Number	Type No.	Fig.	Port Sizes		Comment/Key	
			Supply	Delivery		
0481016209000	-	11	M14x1,5	M14x1,5	FE	
0481016301000	-	12	M14x1,5	M14x1,5	MB,FR/A,TO	
0481016302000	-	13	M14x1,5	M14x1,5		
0481016303000	-	14	2)	2)	MB,FR/A,TO	
0481016308000	-	10	M16x1,5	M16x1,5	MB	
0481016309000	-	10	M16x1,5	M16x1,5		
0481016312000	-	15	M14x1,5	M14x1,5		
0481016401000	-	14	2)	2)	MT,FR/A	
0481016402000	-	14	2)	2)		
0481016601000	-	16	M16x1,5	M16x1,5	MO,FE	
0481016603000	-	17	M16x1,5	M16x1,5	FE,TS	
0481016702000	-	18	M16x1,5	M16x1,5	MB,FE	
0481016703000	-	19	M16x1,5	M16x1,5	MB,FE,INT	
1043106000	-		M16x1,5	M16x1,5		
1043110000	-		M16x1,5	M16x1,5		
1043111000	-		M16x1,5	M16x1,5		
1043116000	-		M16x1,5	M16x1,5		
1043126000	-		M16x1,5	M16x1,5		
1043130000	-		M14x1,5	M14x1,5		
1043132000	-					
1043135000	-		M16x1,5	M16x1,5		
1043137000	-					
1043138000	-		M16x1,5	M16x1,5		
1111414000	-					
1111415000	-		M10x1,0	M10x1,0		
1186677	-	20	M14x1,25	M14x1,25		
1186841	-	20	M14x1,5	M14x1,5	FR/A,INT,TO	
229666	-	21	1/4" NPTF	1/4" NPTF		
267105	-		M12x1,5	M12x1,5		
274580	-	21	1/4" NPTF	1/4" NPTF		
284727	-		1/8" NPTF	1/8" NPTF		
• DPM21A	-	22	M16x1,5 Voss	M16x1,5 Voss	MT,FE,TS,RV	
• DPM22A	-	22	M16x1,5 Voss	M16x1,5 Voss	MB,FE,TS,RV	
• DPM23A	-	22	M16x1,5 Voss	M16x1,5 Voss	MO,FE,TS,RV	
• DPM24A	-	22	M16x1,5 Voss	M16x1,5 Voss	MB,FE,TS,RV	
• DPM28A	-	23	M16x1,5	M16x1,5	MB,FE,TS,LD,RI	
• DPM29A	-	23	M16x1,5	M16x1,5	MO,FE,TS,LD,RI	
DPM30A	-		M14x1,5	M14x1,5		
DPM30B	-		M14x1,5	M14x1,5		
DPM31A	-		M14x1,5	M14x1,5		
DPM32A	-		M14x1,5	M14x1,5		
DPM33A	-		M14x1,5	M14x1,5		
DPM40A	-	24	M14x1,5	M14x1,5	MB,BI,LS	
DPM40CA	-	24	M14x1,5	M14x1,5	MB,BI,LS	
DPM41A	-	24	M14x1,5	M14x1,5	MO,LS	
DPM42A	-	24	M14x1,5	M14x1,5	MO,LD	
DPM43A	-	24	M14x1,5	M14x1,5	MB,LD	
DPM43CA	-	24	M14x1,5	M14x1,5	MB,LD	
DPM44A	-	24	M14x1,5	M14x1,5	MO,LD	
DPM47A	-	24	M14x1,5	M14x1,5	MB,LS	

Part Number	Type No.	Fig.	Port Sizes		Comment/Key	
			Supply	Delivery		
• DPM60A	-	25	M16x1,5	M16x1,5	MB,FE,LS,TS	
• DPM60AA	-	25	M16x1,5	M16x1,5	MB,FE,LS,TS,RI	
• DPM60EY	-	25	M16x1,5	M16x1,5	INT	
• DPM61A	-	25	M16x1,5	M16x1,5	MO,FE,LS,TS	
• DPM61BA	-	25	M16x1,5	M16x1,5	MO,FE,LS,TO,RI	
• DPM61EY	-	25	M16x1,5	M16x1,5	INT	
• DPM62A	-	25	M16x1,5	M16x1,5	MO,FE,LS,BI	
• DPM62BA	-	25	M16x1,5	M16x1,5	MO,FE,LS,TS,RI	
• DPM63AX	-	25	M16x1,5	M16x1,5	MO,FE,INT,LS,TO,RI	
• DPM64A	-		1)	1)		
• DPM65A	-		1)	1)		
• DPM66A	-		1)	1)		
• DPM67A	-		1)	1)		
• DPM68A	-		1)	1)		
DPM80A	-	26	M14x1,5	M14x1,5	MB,INT,FR/B,LD	
DPM80AX	-	26	M14x1,5	M14x1,5	MB,FR/B,LD	
DPM80B	-	26	M14x1,5	M14x1,5	MB,INT,FR/B,LS	
DPM81A	-	26	M14x1,5	M14x1,5	MO,FR/B,LD,TO	
DPM81AY	-	26	M14x1,5	M14x1,5	MO,FR/B,LD,TO	
DPM81BA	-	26	M14x1,5	M14x1,5	MO,FR/B,LS	
DPM81C	-	26	M14x1,5	M14x1,5	MO,FR/B,LD	
DPM81DA	-	26	M14x1,5	M14x1,5	MO,FR/B,LS	
DPM82AK	-	26	M14x1,5	M14x1,5	MO,FR/B,LD	
DPM84A	-	26	M14x1,5	M14x1,5	MO,FE,LD	
DPM84AX	-	26	M14x1,5	M14x1,5	MO,FE,LD	
DPM84C	-	26	M14x1,5	M14x1,5	MO,INT,FE,LD	
DPM84CX	-	26	M14x1,5	M14x1,5	MO,INT,FE,LD	
DPM84CY	-	26	M14x1,5	M14x1,5	MO,INT,FE,LD	
DPM85AK	-	26	M14x1,5	M14x1,5	MB,FE,LD	
DPM85AX	-	26	M14x1,5	M14x1,5	MB,INT,FE,LD	
DPM86AA	-	26	M14x1,5	M14x1,5	MO,FE,LD	
• DPM90A	-	27	M16x1,5	M16x1,5	MB,INT,FE,TS,LS,RI	
• DPM90AA	-	27	M16x1,5	M16x1,5	INT	
• DPM90B	-	27	M16x1,5	M16x1,5	MB,FE,TS,LS,RV	
• DPM90BK	-	27	M16x1,5	M16x1,5	MB,FE,TS,LS,RV	
• DPM90C	-	27	M16x1,5	M16x1,5	MB,FE,TS,LS,RV	
• DPM90CK	-	27	M16x1,5	M16x1,5	MB,FE,TS,LS,RV	
• DPM90CY	-	27	M16x1,5	M16x1,5	MB,FE,INT,TS,LS,RV	
• DPM90CYK	-	27	M16x1,5	M16x1,5	MB,FE,INT,TS,LS,RV	
• DPM90D	-	27	M16x1,5 Voss	M16x1,5 Voss	MB,FE,TS,LS	
• DPM90DA	-	27	M16x1,5 Voss	M16x1,5 Voss	MB,FE,TS,LS	
• DPM90DY	-	27	M16x1,5	M16x1,5	MB,FE,INT,TS,LS,RV	
• DPM90EY	-	27	M16x1,5	M16x1,5	MB,FE,INT,TS,LS	
• DPM91A	-	28	M16x1,5	M16x1,5	MO,INT,FR/A,LD,TO	
• DPM91B	-	27	M16x1,5	M16x1,5	MO,INT,FR/A,LD,TO	
• DPM92A	-	27	M16x1,5	M16x1,5	MO,INT,FE,TS,LS,RI	
• DPM92AB	-	27	M16x1,5 Voss	M16x1,5 Voss	MO,INT,FE,TS,LS,RI	
• DPM92B	-	27	M16x1,5	M16x1,5	MO,FE,TS,LS,RV	
• DPM92D	-	27	M16x1,5 Voss	M16x1,5 Voss	MO,FE,TS,LS,RV	
• DPM93A	-	29	M16x1,5	M16x1,5	MB,FE,INT,TO,LS,RV	

Part Number	Type No.	Fig.	Port Sizes		Comment/Key	
			Supply	Delivery		
• DPM93D	-	29	M16x1,5 Voss	M16x1,5 Voss	MB,FE,TS,LS	
• DPM93DA	-	29	M16x1,5 Voss	M16x1,5 Voss	MB,FE,TS,LS	
• DPM94AAX	-	29	M16x1,5	M16x1,5	MO,FE,INT,TO,LS	
• DPM94B	-	29	M16x1,5	M16x1,5	MO,FE,INT,TO,LS,RV	
• DPM94C	-	29	M16x1,5	M16x1,5	MO,FE,TO,LS,RV	
• DPM94EY	-	29	M16x1,5	M16x1,5	MO,FE,TS,LS,RV	
• DPM95AAX	-	29	M16x1,5	M16x1,5	MB,FE,INT,TO,LS	
• DPM96AAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LD	
• DPM96BAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LD	
DPM96DAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LS	
• DPM96EY	-	29	M16x1,5	M16x1,5	MO,BI,RI,LD	
• DPM97AAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LD	
DPM97DAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LS	
• DPM97EAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LD	
• DPM97FAX	-	29	M16x1,5	M16x1,5	MO,FE,BI,LS	
• DPM98A	-	28	M16x1,5	M16x1,5	MB,FR/A,TO,LD	
• DPM98B	-	28	M16x1,5	M16x1,5	MB,FR/A,TO,LD	
• DPM99A	-	29	M16x1,5	M16x1,5	MB,FE,TO,LD	
I63724	HB1110	30	M14x1,5	M14x1,5	MO	
I86107	HB1132	30	M14x1,5	M14x1,5		
I86108	HB1133	30	M14x1,5	M14x1,5		
I71268	HB1135	30	M14x1,5	M14x1,5		
I75804	HB1136	30	M14x1,5	M14x1,5		
I82170	HB1142	31	M14x1,5	M14x1,5		
I82171	HB1143	31	M14x1,5	M14x1,5		
I82172	HB1144	31	M14x1,5	M14x1,5	FE,TS,MO,RI	
I82174	HB1147	31	M14x1,5	M14x1,5		
I76112	HB1154	32	M16x1,5	M16x1,5		
I82890	HB1157	32	M16x1,5	M16x1,5		
I92180	HB1167	33	1)	1)	FR/A,MT,LS	
I92181	HB1168	34	2)	2)		
I92182	HB1170	35	2)	2)		
I92183	HB1172	33	2)	2)		
I92185	HB1175	35	2)	2)		
I82175	HB1176	31	M14x1,5	M14x1,5		
I92186	HB1179	34	M14x1,5	M14x1,5		
I92187	HB1180	34	M14x1,5	M14x1,5		
I92188	HB1181	36	M14x1,5	M14x1,5		
I92190	HB1189	37	M14x1,5	M14x1,5		
I92191	HB1190	34	M14x1,5	M14x1,5		
I92194	HB1201	36	M14x1,5	M14x1,5		
I92195	HB1203	36	M14x1,5	M14x1,5		
I92196	HB1204	38	M14x1,5	M14x1,5	FR/A,BI,MT	
I92198	HB1219	34	M14x1,5	M14x1,5		
I84644	HB1241	31	M14x1,5	M14x1,5	FE,MO,TS	
I85193	HB1242	39	M14x1,5	M14x1,5	FE,MO,TS	
I92030	HB1258	31	M14x1,5	M14x1,5	FE,MO,TS	
I89397	HB1260	34	M14x1,5	M14x1,5		
I89398	HB1261	31	M14x1,5	M14x1,5	FE,MO,TS	
I97915	HB1266	39	M14x1,5	M14x1,5		

Part Number	Type No.	Fig.	Port Sizes		Comment/Key	
			Supply	Delivery		
I98746	HB1267	31	M14x1,5	M14x1,5		
I82177	HB1350	40	M14x1,5	M14x1,5	FE,MO,TS	
I79498	HB1354	40	M14x1,5	M14x1,5	FE,MO,TS	
I94924	HB1365	40	M14x1,5	M14x1,5	FE,MO,TS	
I86656	HB1500	25	M16x1,5	M16x1,5		
KX1130/4	-	41	1/4" NPTF	1/4" NPTF		
KX2006/1	-	41	1/4" NPTF	1/4" NPTF		
KY1467/23		42	1/8" NPTF	1/8" NPTF	LS,TS	
KY2274/1	-	43	1/4" NPTF	1/4" NPTF		
KY2310/1	-	43	M14x1,5	M14x1,5		
KY2357/1	-	43	1/4" PTF	1/4" PTF		
KY2452/4	-	43	1/4" PTF	1/4" PTF		
KY2473/2	-	43	1/4" PTF	1/4" PTF		
KY2497/2	-	43	1/4" PTF	1/4" PTF		
KY2498/1	-	43	1/4" PTF	1/4" PTF		
KY2509/2	-	44	1/4" PTF	1/4" PTF		
KY2528/1	-	43	M14x1,5	M14x1,5		
KY932/7	-	45	3/8" NPTF	3/8" NPTF		
KY932/8	-	45	3/8" NPTF	3/8" NPTF		

¹⁾ Flange

²⁾ Special Port for specific Daimler Chrysler application

14. Load Sensing Valves and Accessories



14.1 Load Sensing Valves - Mechanical Suspension

Key:

- EV With Emergency Valve
- L Lever on left
- M Manual Load Sensing Valve function
- R Lever on right
- RV With Relay function
- W Supplied with Lever

- A Inshot Pressure [bar]
- B Lever Range Degrees
- Preferred Product

SK2964/1 is a Trailer retrofit kit that contains a KY2248/1 and instructions

Fig. 1



VFB0035

Fig. 2



VFB0619

Fig. 3



VFB0717

Fig. 4



VFB0728

Fig. 5



VFB0622

Fig. 6



VFB0623

Fig. 7



GrF0306

Fig. 8



GrF0043

Fig. 9



GrF0436

Fig. 10



GrF0304

Fig. 11



GrF0083

Fig. 12



GrF0084

Fig. 13



GrF0086

Fig. 14



GrF0438

Fig. 15




GrF0505

Fig. 16



GrF0283

Fig. 17



VF00199_123

Part Number	Type No.	Fig.	Port Sizes			A	B	Comment/Key
			Supply	Delivery	Control			
0481036000000	-							
0481036108000	-	1	M16x1,5	M16x1,5	M16x1,5	0,6	30	RV,R
• 0481036206000	-	2	M16x1,5	M16x1,5		0,3	30	R
• 0481036207000	-	2	M16x1,5	M16x1,5		0,3	30	L
0481065000000	-							
• 0481065002000	-	3	M16x1,5	M16x1,5			30	R,W
• 0481065004000	-	4	M16x1,5	M16x1,5			-	L,W
0481097003000	-	5	M12x1,0	M12x1,0			36	R,W
0481097006000	-	5	M12x1,0	M12x1,0			30	R,W
0481097007000	-	5	M12x1,0	M12x1,0			30	R,W
0481097008000	-		M12x1,0	M12x1,0			30	R,W
0481099001000	-	6	M12x1,0	M12x1,0			26	R,W
0481099009000	-	6	M12x1,0	M12x1,0			23	R,W
0481099011000	-	6	M12x1,0	M12x1,0			34	R,W
1100552010	-		2)	M18x1,5			180	L,W,M
1100564000	-		M16x1,5	M16x1,5			180	L,W,M
1111853000	-		M22x1,5	M16x1,5		0,5	1)	R,W
1111950000	-	7	M16x1,5	M16x1,5		0,5	32	R,W
1111951000	-	7	M16x1,5	M16x1,5		0,5	32	R,W
1111965000	-		M22x1,5	M22x1,5	M22x1,5	0,5	26	R,RV
1111980000	-	8	M22&M16x1,5	M22&M16x1,5	M16x1,5	0,5	26	EV,R,W
1111995000	-		M22&M16x1,5	M22&M16x1,5	M16x1,5	0,5	26	EV,R,W
1111996000	-		M22&M16x1,5	M22&M16x1,5	M16x1,5	0,5	26	EV,R,W
1111999000	-	8	M22&M16x1,5	M22&M16x1,5	M16x1,5	0,5	26	EV,R,W
1112001000	-		M22&M16x1,5	M22&M16x1,5	M16x1,5	0,5	26	EV,R,W
1112002000	-	8	M22&M16x1,5	M22&M16x1,5	M16x1,5	0,5	26	EV,R,W
1186506	-	9	M22x1,5	M22x1,5		0,5	68	R,W
1186526	-	9	M22x1,5	M22x1,5		0,5	55	R,W,M
1186938	-	9	M22x1,5	M22x1,5		0,5	68	R,W,M
1189065	-	9	M22x1,5	M22x1,5		0,7	80	R,W
1189096	-	9	M22x1,5	M22x1,5		0,5	68	R,W,M
1189097	-	9	M22x1,5	M22x1,5		0,5	37	R,W,M
443612341000	-							
443612401000	-							
443612401004	-							
443612402001	-							
I84573	BR1105	10	M22x1,5	M22x1,5				M
I84575	BR1305	10	M22x1,5	M22x1,5				M
I84576	BR1306	10	M22x1,5	M22x1,5				M
I80653	BR4253	11	M22x1,5	M22x1,5		0,6	41	R
I80655	BR4263	11	M22x1,5	M22x1,5		0,6	41	L
I80657	BR4265	11	M22x1,5	M22x1,5		0,6	41	L
• SEB00661	BR4351		M22x1,5	M22&M16x1,5	M16x1,5	0,4	20	L
• SEB00659	BR4352		M22&M16x1,5	M22&M16x1,5	M16x1,5	0,4	20	EV,R,W
SEB01067	BR4352		M22&M16x1,5	M22&M16x1,5	M16x1,5	0,4	20	EV,R,W
SEB01279	BR4355		M22&M16x1,5	M22&M16x1,5	M16x1,5	0,4	20	RV,EV,R,W
• SEB00933	BR4370		M22x1,5	M16x1,5	M22x1,5	0,4	20	R,W
• SEB00979	BR4371		M22x1,5	M16x1,5	-	0,4	20	L,W
• I78307	BR4411	12	M16x1,5	M16x1,5	M16x1,5	0,8	30	RV,R
• I81595	BR4412	12	M16x1,5	M16x1,5	M16x1,5	0,6	60	RV,R

Part Number	Type No.	Fig.	Port Sizes			A	B	Comment/Key
			Supply	Delivery	Control			
• I84253	BR4413	12	M22x1,5	M16x1,5	M16x1,5	0,5	30	RV,L,W
• I84450	BR4414	12	M22x1,5	M16x1,5	M16x1,5	0,6	30	RV,R
• I84451	BR4415	12	M22x1,5	M16x1,5	M16x1,5	0,5	34	RV,L
I85280	BR4420	12	Voss NG12	Voss NG12	Voss NG8	0,6	60	RV,L,W
• I85281	BR4421	12	Voss NG12	Voss NG12	Voss NG8	0,6	30	RV,R
• I90908	BR4423	12	M16x1,5	M16x1,5	M16x1,5	0,6	60	RV,L
• I92295	BR4429	13	M16x1,5	M16x1,5	M16x1,5	0,8	60	RV,R,W
• I88474	BR4431	12	M22x1,5	M16x1,5	M16x1,5	0,5	30	RV,R
• II14591	BR4439	12	Voss NG12	Voss NG12	Voss NG8	0,6	60	RV,R
II15372	BR4441	12	M22x1,5	M16x1,5	M16x1,5	0,5	30	RV,R
• II14892	BR4442	12	M16x1,5	M16x1,5	M16x1,5	0,6	60	RV,L,W
II14893	BR4443	12	M16x1,5	M16x1,5	M16x1,5	0,6	30	RV,L,W
II14894	BR4444	12	M16x1,5	M16x1,5	M16x1,5	0,6	60	RV,R,W
II14895	BR4445	12	M16x1,5	M16x1,5	M16x1,5	0,6	30	RV,R,W
• II17649	BR4453	13	Voss NG12	Voss NG12	Voss NG8	0,5	30	RV,L,W
• II18069	BR4454	12	Voss NG12	Voss NG12	Voss NG8	0,6	60	RV,L
• II18784	BR4455	12	M22x1,5	M16x1,5	M16x1,5	0,5	30	RV,L,W
• II18785	BR4456	12	Voss NG12	Voss NG12	Voss NG8	0,6	30	RV,R,W
• II18786	BR4457	12	Voss NG12	Voss NG12	Voss NG8	0,6	30	RV,L,W
• II33922	BR4458	12	M22x1,5	M16x1,5	M16x1,5	0,5	30	RV,L,W
• II36826	BR4465	12	Voss NG12	Voss NG12	Voss NG8	0,5	30	RV,R,W
• II36827	BR4466	12	Voss NG12	Voss NG12	Voss NG8	0,5	30	RV,L,W
• II36828	BR4467	12	Voss NG12	Voss NG12	Voss NG8	0,5	30	RV,R,W
• II36829	BR4468		Voss NG12	Voss NG12	Voss NG8	0,5	30	RV,L,W
I69426	BR6110		M10x1	M10x1				Hydr. W
• II37156	-		M22x1,5	M16x1,5	M16x1,5	0,8	30	RV,L,W
KY1038/3	-	14	M22x1,5	M22x1,5			30	L,W
KY1929/1	-	9	M22x1,5	M22x1,5			37	R,W,M
KY1932/2	-	9	M22x1,5	M22x1,5		0,5	68	R,W,M
KY1956/3	-	9	3/8"-1/4 NPTF	3/8"-1/4 NPTF		0,7	31	L,W
KY1956/5	-	9	3/8"-1/4 NPTF	3/8"-1/4 NPTF		0,7	31	L,W
KY1972/1	-	9	M22x1,5	M22x1,5		0,5	68	L,M
KY1994/2SP	-	9	3/8"-1/4 NPTF	3/8"-1/4 NPTF		0,7	30	R,W
KY2184/1	-	9	M22x1,5	M22x1,5		0,5	68	L,W,M
KY2193/1	-	9	M22x1,5	M22x1,5		0,5	37	R,W,M
KY2193/2	-	9	M22x1,5	M22x1,5		0,5	37	R,W,M
KY2193/3	-	9	M22x1,5	M22x1,5		0,5	37	R,W,M
KY2248/1	-	9	M22x1,5	M22x1,5		0,5	42	R,W,M
KY2248/3	-	9	M22x1,5	M22x1,5		0,5	15	R,W,M
KY2493/2SP	-	9	M22x1,5	M22x1,5		0,5	30	R,W
KY2578/1	-	14	M22x1,5	M22x1,5		0,5	42	R,W,M
KY807/1	-	14	M22x1,5	M22x1,5			60	R,W,M
KY881/2	-	14	M22x1,5	M22x1,5			60	R,M
KY881/3	-	14	M22x1,5	M22x1,5		0	60	L
KY890/1	-	14	M22x1,5	M22x1,5			30	R,W,M
KY952/4	-	14	M22x1,5	M22x1,5			60	R,W,M
KY982/2	-	14	M22x1,5	M22x1,5			30	R,W,M
KY982/6	-	14	M22x1,5	M22x1,5			30	R,W,M
KZ1137/2	-	14	M22x1,5	M22x1,5		0,5	68	R,W
MP11CXY	-		M22x1,5	M20x1,5		0,5	34° 30'	R,W,M

Part Number	Type No.	Fig.	Port Sizes		Control	A	B	Comment/Key
			Supply	Delivery				
MP11DX	-		M30x1,5	M30x1,5		0,5	34	R,W,M
MP12BY	-		M22x1,5	M22x1,5		0,5	20	R,W,M
MP12D	-		M30x1,5	M22x1,5		0,5	20	R,W,M
MP13AX	-	15	M22x1,5	M22x1,5		0,5	34°30'	R
MP1AK	-		M14x1,5	M14x1,5			25	R,W,M
MP1B	-		M18x1,5	M18x1,5			25	R,W,M
MP51AY	-	15	M22x1,5	M22x1,5	M16x1,5	0,5	34° 30'	RV,R
MP51CY	-		M22x1,5	M22x1,5	M16x1,5	0,5	34° 30'	RV,R
MP5A	-		M14x1,5	M14x1,5	M14x1,5		25	R,W,M
MP71A	-		M22x1,5	M22x1,5		0,5		
MP71B	-	16	M22x1,5	M22x1,5		0,5		
MS1A	-	17	M16x1,5	M22&M16x1,5	M16x1,5	0,5	20	EV,RV,R,W,








¹⁾ Lever Range 32 Degrees Adjustable

²⁾ Flange

Key:

EV With Emergency Valve
 D Dynamic
 RV With Relay function
 S Static

A Inshot [bar]
 • Preferred Product

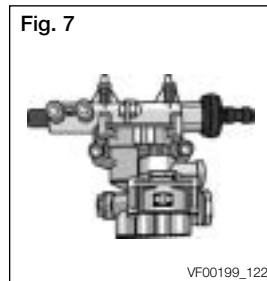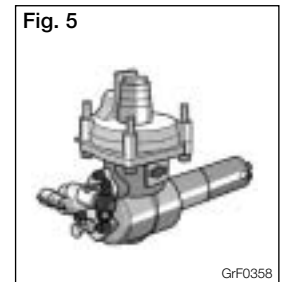

Part Number	Type No.	Fig.	Port Sizes			Bag	A	Comment/Key
			Supply	Delivery	Control			
• 0481065101000	-	1	M16x1,5	M16x1,5	M12x1,5	M12x1,5		S,D
• 0481065102000	-	1	M16x1,5	M16x1,5	M12x1,5			S,D
• 0481065103000	-	1	M16x1,5	M16x1,5	M12x1,5			
443612280704	-							
443612403007	-							
443612403008	-							
443612403016	-							
443612403022	-							
443612403023	-							
443612407002	-							
443612407005	-							
I75321	BR5325	2	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,6	
I76333	BR5331	2	M22x1,5	M22x1,5	M22x1,5	M12x1,5	0,6	
I76370	BR5332	2	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,6	
I81040	BR5342	2	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,5	
I94299	BR5407	3	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,8	
I73358	BR5408	3	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,6	
I78888	BR5420	3	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,3	
• SEB00658	BR5503	4	M22x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,4	RV,S,D
• SEB00651	BR5504	4	M16x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,4	RV,S,D
SEB01091	BR5508		M22&M16x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,4	RV,D
SEB00934	BR5520		M22x1,5	M22x1,5	M22x1,5	M12x1,5	0,4	
II36836	BR5522	5	M22x1,5	M16x1,5		M12x1,5	0,4	S
SEB01326	BR5522	5	M22x1,5	M22x1,5	M22x1,5	M12x1,5	0,4	S

Part Number	Type No.	Fig.	Port Sizes			Bag	A	Comment/Key
			Supply	Delivery	Control			
• SEB01344	BR5523							
• SEB01241	BR5524		M22&M16x1,5	M22x1,5	M16x1,5	M12x1,5	0,4	RV,D
• SEB01509	BR5524		M22&M16x1,5	M22x1,5	M16x1,5	M12x1,5	0,4	EV,RV,D
• SEB01510	BR5524		M22&M16x1,5	M22x1,5	M16x1,5	M12x1,5	0,4	
II36818	BR5530	5	M22x1,5	M16x1,5		M12x1,5	0,4	S,D
II37168	BR5534		M22&M16x1,5	M22x1,5	M16x1,5	M12x1,5	0,4	EV,RV,D
BR56	-		M22&M16x1,5	M22x1,5		M12x1,5	0,6	S
II19423	BR5604	6	M22X1,5	M22X1,5	M16X1,5	M16X1,5	0,6	RV,D
II19424	BR5605	6	M22x1,5	M22x1,5	M16x1,5	M16X1,5	0,5	EV,RV,D
I98733	BR5605	6	M22x1,5	M22x1,5	M16x1,5	M16X1,5	0,5	RV,D
• I92160	BR5607	6	M16x1,5	M16x1,5	M16x1,5	M12x1,5	0,5	RV,D
• I92161	BR5608	6	M16x1,5	M16x1,5	M16x1,5	M12x1,5	0,45	RV,D
• I93565	BR5611	6	M16x1,5	M16x1,5	M16x1,5	M12x1,5	0,4	RV,D
• II14588	BR5615	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,5	RV,D
• II14589	BR5616	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,45	RV,D
• II14590	BR5617	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,4	RV,D
• II18036	BR5619	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,5	RV,D
II19416	BR5628	6	M22x1,5	M22x1,5	M16x1,5	M16x1,5	0,5	RV,D
II19418	BR5630	6	M22x1,5	M22x1,5	M16x1,5	M16x1,5	0,5	R V,D
• II31402	BR5633	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,5	RV,D
• II32766	BR5643	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,5	RV,D
• II32792	BR5645	6	M16x1,5	M16x1,5	M16x1,5	M12x1,5	0,7	RV,D
II33921	BR5648	6	Voss NG12	Voss NG12	Voss NG8	Voss NG8	0,4	RV,D
• II36839	BR5655	6	M22x1,5	M22x1,5	M16x1,5	M16X1,5	0,7	RV,D
• II37154	BR5656		M16x1,5	M16x1,5	M16x1,5	M12x1,5	0,5	RV,D
II37166	BR5657		M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,4	
I93912	BR5704	2	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,6	
I94301	BR5705	2	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,4	
II17353	BR5712	2	M22x1,5	M22x1,5	M12x1,5	M12x1,5	0,6	
MP70A	-	7	M22x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,5	RV,S
MS10A	-	7	M16x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,5	EV,RV,S
MS10B	-	7	M22&M16x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,5	EV,RV,S
MS10C	-		M22&M16x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,5	EV,RV,S
MS10D	-		M22&M16x1,5	M22&M16x1,5	M16x1,5	M12x1,5	0,5	EV,RV,S
SEB00443	-	4						

14.3 Buffer

Part Number	Type No.	Fig.	Comment/Key
SKW3027/1	-	8	Tandem Axles

14.4 Linkage


Part Number	Type No.	Fig.	Comment/Key
KX1037/1	-	9	Single Axle Linkage

15. Relay Valves



Key:

- IS Integrated Silencer
- Preferred Product

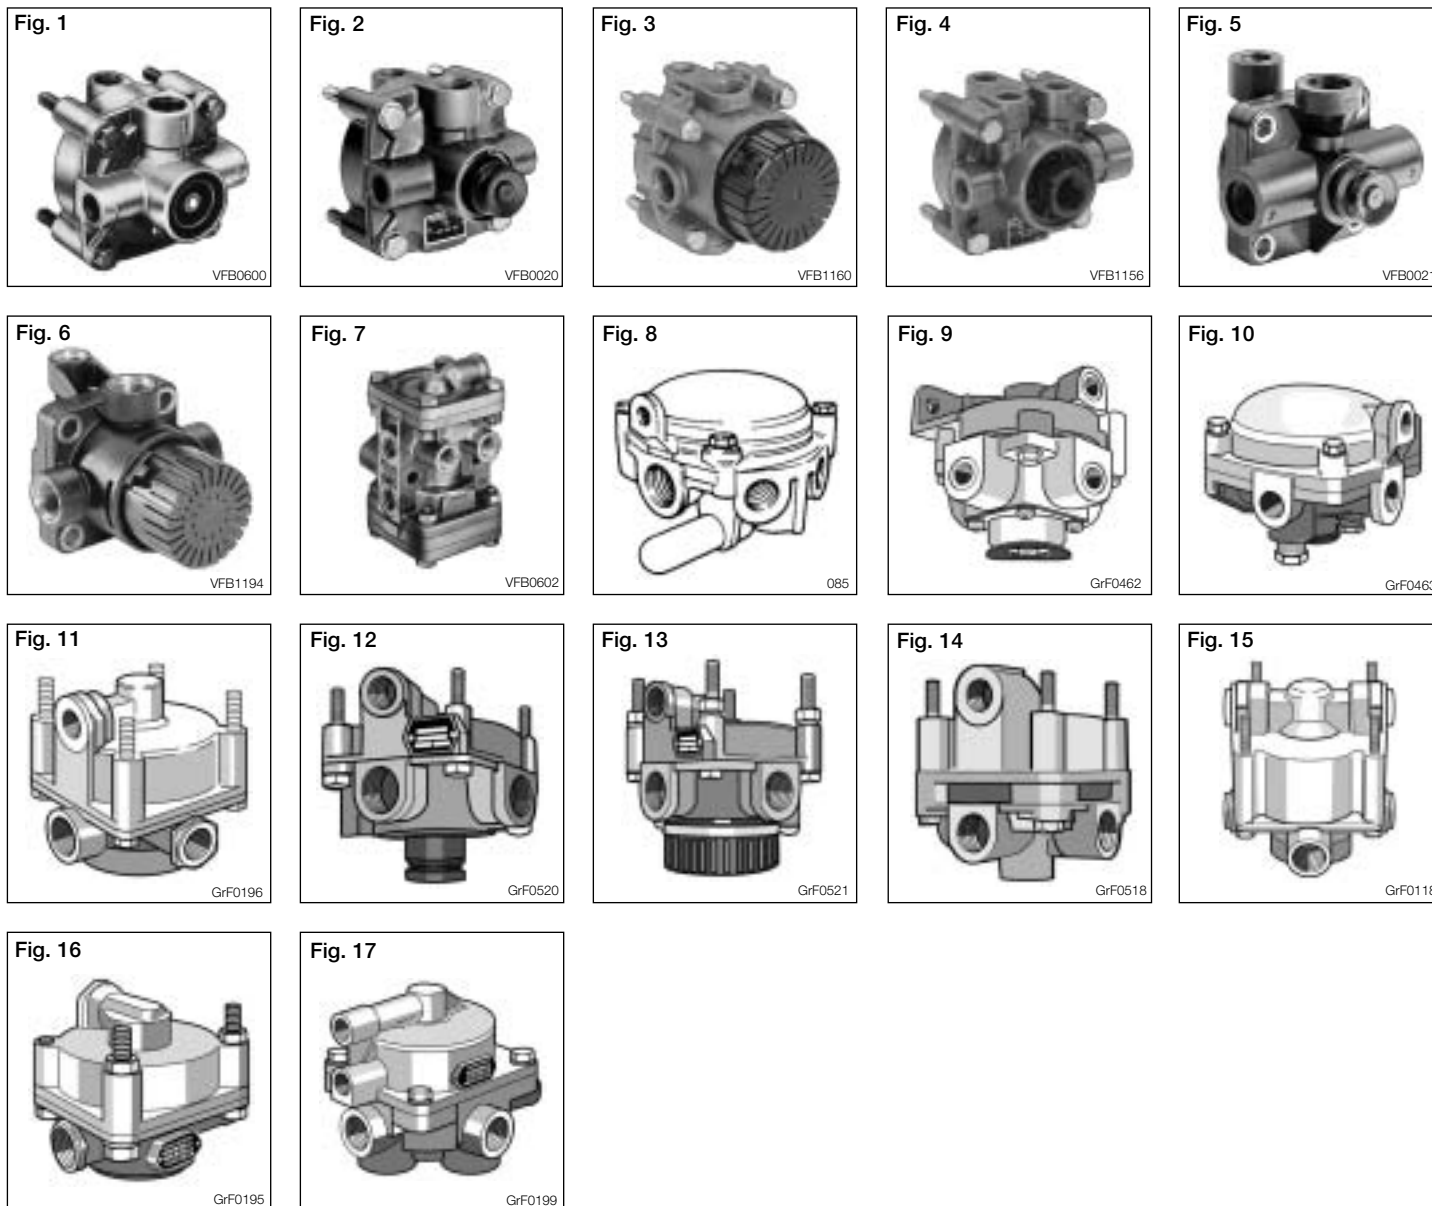

Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Control		
0481026006000	-	1	M22x1,5	M16x1,5	M16x1,5		
0481026008000	-	1	M22x1,5	M22x1,5	M22x1,5		
0481026012000	-	1	M22x1,5	M16x1,5	M16x1,5		
0481026013000	-	1	M22x1,5	M16x1,5	M16x1,5		
0481026021000	-	2	M22x1,5	M22x1,5	M16x1,5		
0481026022000	-	2	M22x1,5	M22x1,5	M16x1,5		
0481026023000	-	3	Voss NG12	Voss NG12	Voss NG8	IS	
0481026026000	-	3	M22x1,5	M22x1,5	M16x1,5	IS	
0481026033000	-	4	M22x1,5	M16x1,5	M16x1,5	IS	
• 0481026301000	-	5	M22x1,5	M22x1,5	M16x1,5		
• 0481026302000	-	5	M22x1,5	M16x1,5	M16x1,5		
• 0481026303000	-	6	M22x1,5	M16x1,5	M16x1,5	IS	
• 0481026304000	-		M22x1,5	M22x1,5	M16x1,5	IS	
• 0481026305000	-	5	M22x1,5	M22x1,5	M16x1,5	IS	

Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Control		
0481026306000	-	5	M22x1,5	M22x1,5	M16x1,5		
0481026307000	-		M22x1,5	M22x1,5	M22x1,5	IS	
0481057002000	-	7	M16x1,5	M16x1,5	M16x1,5		
0821302026	-		M22x1,5	M22x1,5	M16x1,5		
101930	-	8	M22x1,5	M22x1,5	M12x1,5		
103060	-		1/2" NPTF	1/2" NPTF	1/4" NPTF		
1100586000	-		M18x1,5	M18x1,5	M16x1,5		
1489992111	-						
267114	-	9	3/8" NPTF	3/8" NPTF	1/4" NPTF		
279180	-	10	3/8" NPTF	3/8" NPTF	1/4" NPTF		
280375	-	10	1/2" NPTF	3/8" NPTF	1/4" NPTF		
295071	-	10	1/2" NPTF	3/8" NPTF	1/4" NPTF		
295198	-	10	3/4" NPTF	3/8" NPTF	1/4" NPTF		
295199	-	10	M22x1,5	M16x1,5	M12x1,5		
295295	-	10	1/2" NPTF	3/8" NPTF	1/4" NPTF		
443612280001	-						
443612281003	-						
443612346000	-						
AC570AX	-	11	M22x1,5	M22x1,5	M22x1,5		
• AC574A	-	12	M22x1,5	M22x1,5	M16x1,5		
• AC574AX	-	12	M22x1,5	M22x1,5	M16x1,5		
• AC574AXY	-	12	M22x1,5	M22x1,5	M16x1,5	IS	
• AC574AY	-	12	M22x1,5	M22x1,5	M16x1,5	IS	
• AC574BX	-	12	M22x1,5	M22x1,5	M16x1,5	IS	
• AC574BXY	-	13	M22x1,5	M22x1,5	M16x1,5	IS	
• AC574BY	-	13	M22x1,5	M22x1,5	M16x1,5	IS	
• AC574BYW	-	13	M22x1,5	M22x1,5	M16x1,5	IS	
AC574BYZ	-		M22x1,5	M22x1,5	M16x1,5	IS	
• AC574CXY	-	13	M22x1,5	M22x1,5	M16x1,5	IS	
AC575A	-	14	M22x1,5	M22x1,5	M16x1,5	IS	
AC575AK	-		M22x1,5	M22x1,5	M16x1,5	IS	
AC576A	-	14	M22x1,5	M22x1,5	M16x1,5	IS	
AC576AK	-		M22x1,5	M22x1,5	M16x1,5	IS	
• AC577A	-		M22x1,5	M22x1,5	M16x1,5	IS	
• AC577AA	-		M22x1,5	M22x1,5	M16x1,5	IS	
• AC577B	-		M22x1,5	M22x1,5	M16x1,5	IS	
• AC579A	-		M22x1,5 Voss	M22&M16x1,5	M22x1,5	IS	
• AC579B	-		M22x1,5	M22&M16x1,5	M22x1,5	IS	
AC581A	-		M18x1,5	M18x1,5	M14x1,5		
AC583A	-		M22x1,5	M22x1,5	M14x1,5		
AC586A	-	15	M22x1,5	M22x1,5	M22x1,5		
AC586AA	-	15	M22x1,5	M22x1,5	M22x1,5		
AC586AAX	-	15	M22x1,5	M22x1,5	M22x1,5		
AC586AX	-	15	M22x1,5	M22x1,5	M22x1,5	IS	
AC586AY	-		M22x1,5	M22x1,5	M22x1,5		
I77745	-						
II36079	-	15	M22x1,5	M16x1,5	M16x1,5		
II38821F	-						
KY1640/1	-	10	M22x1,5	M16x1,5	M12x1,5		
KY1657/1	-	8	3/4" NPTF	1/2" & 1/4" NPTF	1/4" NPTF		





Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Control		
KY1810/1	-	8	M26x1,5	M22&M12x1,5	M12x1,5		
<i>I46365</i>	RE1105	16	M22x1,5	M22x1,5	M22x1,5		
<i>I76792</i>	RE1110	11	M22x1,5	M22x1,5	M22x1,5		
<i>I76204</i>	RE1115	11	M22x1,5	M16x1,5	M16x1,5		
<i>II36078</i>	RE1115	11	M22x1,5	M16x1,5	M16x1,5	IS	
<i>I68206</i>	RE1119	11	M16x1,5	M16x1,5	M16x1,5		
<i>I76202</i>	RE1121	11	M22x1,5	M16x1,5	M16x1,5		
<i>I77762</i>	RE1126	11	M22x1,5	M16x1,5	M16x1,5		
<i>I81800</i>	RE1129	11	M22x1,5	M22x1,5	M22x1,5		
<i>I85168</i>	RE1131	11	M22x1,5	M22x1,5	M22x1,5		
<i>I86017</i>	RE1132	11	M22x1,5	M22x1,5	M16x1,5		
<i>II16468</i>	RE1141	11	M22x1,5	M16x1,5	M16x1,5		
<i>II36085</i>	RE1147	11	M22x1,5	M16x1,5	M16x1,5	IS	
<i>I61349</i>	RE2220	15	M22x1,5	M16x1,5	M16x1,5		
<i>I63354</i>	RE2221	15	M22x1,5	M22x1,5	M22x1,5		
<i>I77763</i>	RE2224	15	M22x1,5	M22x1,5	M22x1,5		
<i>I78406</i>	RE2225	17	M22x1,5	M22x1,5	M14x1,5		
<i>II34747</i>	RE2230	15	M22x1,5	M22x1,5	M22x1,5		
<i>I46366</i>	RE2504	11	M16x1,5	M16x1,5	M12x1,5		
<i>SEB01100</i>	RE3310		M22x1,5	M22x1,5	M22x1,5		
<i>II39050F</i>	RE3312		M22x1,5	M22x1,5	M22x1,5		
RP1A	-		M22x1,5	M22x1,5	M22x1,5	IS	
• RP2A	-		M22x1,5	M22x1,5	M22x1,5	IS	

16. Quick Release Valves



Key:

- ECV Exhaust Check Valve
• Preferred Product



Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Exhaust		
107740	-		1/2" NPTF	3/8" NPTF			
1111521000	-		M22x1,5	M22x1,5	M22x1,5		
1111522000	-		M22x1,5	M16x1,5	M22x1,5		
1111523000	-		M16x1,5	M16x1,5		ECV	
1111525000	-		3/8" NPTF	3/8" NPTF			
1111526000	-		M16x1,5	M16x1,5	M16x1,5		
1111527000	-						
• 1186892	-	1	M22x1,5	M16x1,5	M22x1,5		
1194339	-	2	M22x1,5	M16x1,5	M22x1,5		
229813	-		3/8" NPTF	1/4" NPTF			
274996	-	1	3/8" NPTF	1/4" NPTF	3/8" NPTF		
274997	-	1	3/8" NPTF	3/8" NPTF	3/8" NPTF		
274998	-	1	1/2" NPTF	1/4" NPTF	3/8" NPTF		
274999	-	1	1/2" NPTF	3/8" NPTF	3/8" NPTF		
278483	-		1/2" NPTF	3/8" NPTF			
288417	-		3/8" NPTF	3/8" NPTF	3/8" NPTF		
289714	-		1/4" NPTF	3/8" NPTF	1/4" NPTF		
30030002	-						
30030003	-						
443612356000	-						
443612356001	-						
• KX1294/1	-	1	M22x1,5	M16x1,5	M16x1,5		
• KX1294/2	-	1	M16x1,5	M16x1,5	M16x1,5		
KX1294/5	-	3	M22x1,5	M16x1,5	M16x1,5		
KX2000/1	-	1	M22x1,5	M22x1,5	M22x1,5		
KX2196/1	-	1	M22x1,5	M16x1,5	M16x1,5		
• KX2552/3	-	1	M22x1,5	M16x1,5	M22x1,5		
KX2606/2	-	1	3/8" NPTF	3/8" NPTF		ECV	
KX2621/2	-	1	3/8" NPTF	1/2" NPTF		ECV	
KX2632/2	-	1	3/8" NPTF	1/2" NPTF		ECV	
KY2589/2	-	1	1/2" NPTF	3/8" NPTF			
• KY2590/4	-	1	M22x1,5	M16x1,5		ECV	
KY2590/5	-	1	M22x1,5	M16x1,5		ECV	
I59456	RE2102		M22x1,5	M22x1,5	M22x1,5		
I70676	RE2108	4	M22x1,5	M22x1,5		ECV	
I71988	RE2111	4	M22x1,5	M22x1,5	M22x1,5		
I74908	RE2113	4	M22x1,5	M22x1,5		ECV	
I82697000	RE2117	4	M22x1,5	M22x1,5	M22x1,5		


16. Quick Release Valves

Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Exhaust		
<i>II18037000</i>	RE2117	4	M22x1,5	M22x1,5	M22x1,5		
<i>I92200</i>	RE2118	4	M22x1,5	M22x1,5		ECV	
<i>II36015</i>	RE2130		M22x1,5	M22x1,5		ECV	
<i>II36017</i>	RE2131		M22x1,5	M22x1,5		ECV	
VSR2A	-	1	M22x1,5	M22x1,5	M22x1,5		

17. Pressure Retaining Valves

Key:

- Preferred Product







Part Number	Type No.	Fig.	Port Sizes		Retained Pressure	
			Supply	Delivery		
• I53929	DB2113	1	M22x1,5	M22x1,5	0,55 bar	
II14891	DB2135	1	M22x1,5	M22x1,5	0,6 bar	

18. Pressure Proportioning Valves



Key:

- Preferred Product



Part Number	Type No.	Fig.	Port Sizes			Reduction Ratio	
			Supply	Delivery	Control		
0481067007000	-	1	M22x1,5	M22x1,5		2,2:1	
0481067008000	-	1	M22x1,5	M22x1,5		2,2:1	
0481067009000	-	1	M22x1,5	M22x1,5		1,5:1	
1100575000	-		M22x1,5	M22x1,5		1,35:1	
1100576000	-		M22x1,5	M22x1,5		1,5:1	
1100578000	-		M22x1,5	M22x1,5		1,15:1	
1101566000	-		M16x1,5	M16x1,5		1,5:1	
1101574000	-		M22x1,5	M22x1,5	M12x1,5	1,5:1	
1101575000	-	2	M22x1,5	M22x1,5	M12x1,5	1,35:1	
1101576000	-	2	M22x1,5	M22x1,5	M12x1,5	1,5:1	
1101577000	-	2	M22x1,5	M22x1,5	M12x1,5	2,0:1	
1101585000	-		M16x1,5	M16x1,5	M16x1,5	1,35:1	
1101586000	-		M16x1,5	M16x1,5	M16x1,5	1,5:1	
1101587000	-		M16x1,5	M16x1,5	M16x1,5	2,0:1	
1101588000	-		M16x1,5	M16x1,5	M16x1,5	1,15:1	
1101589000	-		M16x1,5	M16x1,5	M16x1,5	4,0:1	
1101595000	-		M16x1,5	M16x1,5		1,25:1	
1101686000	-		M16x1,5	M16x1,5	M16x1,5	1,5:1	
1101687000	-		M16x1,5	M16x1,5	M16x1,5	2,0:1	
1101688000	-		M16x1,5	M16x1,5	M16x1,5	1,15:1	
1101691000	-		M16x1,5	M16x1,5	M16x1,5	1,25:1	
1101785000	-		M16x1,5	M16x1,5	M16x1,5	1,35:1	
1101786000	-		M16x1,5	M16x1,5	M16x1,5	1,5:1	
1101788000	-		M16x1,5	M16x1,5	M16x1,5	1,15:1	
AC170A	-	6	M22x1,5	M22x1,5		1,15:1	
AC170F	-	6	M22x1,5	M22x1,5		2:1	
AC180B	-	7	M16x1,5	M16x1,5	M16x1,5	1,5:1	
AC180BX	-	7	M16x1,5	M16x1,5	M16x1,5	1,5:1	
AC185A	-	2	M16x1,5	M16x1,5	M16x1,5		
AC185B	-	2	M16x1,5	M16x1,5	M16x1,5		


Part Number	Type No.	Fig.	Port Sizes		Control	Reduction Ratio	
			Supply	Delivery			
• I43387	DB2110	3	M22x1,5	M22x1,5		1,8:1	
• I50402	DB2111	3	M22x1,5	M22x1,5		5,5:1	
• I86153	DB2114	4	M22x1,5	M22x1,5		2,0:1	
• I86154	DB2115	4	M22x1,5	M22x1,5		1,5:1	
• I86155	DB2116	4	M22x1,5	M22x1,5		1,15:1	
II36219	DB2116	4	M22x1,5	M22x1,5		1,15:1	
K001043	DB2116	4	M22x1,5	M22x1,5		1,15:1	
K001047	DB2116	4	M22x1,5	M22x1,5		1,15:1	
• I86156	DB2118	5	M22x1,5	M22x1,5		1,35:1	
K001045	DB2118	4	M22x1,5	M22x1,5		1,35:1	
• I86157	DB2121	5	M22x1,5	M22x1,5		1,8:1	
II36077	DB2121	5	M22x1,5	M22x1,5		1,8:1	
• I86158	DB2122	5	M22x1,5	M22x1,5		1,25:1	
K001044	DB2122	4	M22x1,5	M22x1,5		1,25:1	
• I86159	DB2123	5	M22x1,5	M22x1,5		2,7:1	
II36081	DB2137		M22x1,5	M22x1,5		1:1	
II36019	DB2141	4	M22x1,5	M22x1,5		1,15:1	
II36021	DB2142	4	M22x1,5	M22x1,5		1,35:1	
II36023	DB2143	4	M22x1,5	M22x1,5		1,25:1	
I77200	DB2220	6	M16x1,5	M16x1,5	M16x1,5	1,5:1	
I77201	DB2221	6	M16x1,5	M16x1,5	M16x1,5	2,0:1	
I77202	DB2222	6	M16x1,5	M16x1,5	M16x1,5	2,7:1	
I78414	DB2231	6	M16x1,5	M16x1,5	M16x1,5	2,0:1	
II14111	DB2237	6	M22x1,5	M22x1,5	M16x1,5	1,5:1	
• II15724	DB2240	6	M16x1,5	M16x1,5	M16x1,5	1,5:1	
II36065	DB2244	6	M16x1,5	M16x1,5	M16x1,5	1,5:1	
II36066	DB2245	6	M16x1,5	M16x1,5	M16x1,5	2,7:1	
II36067	DB2246	6	M16x1,5	M16x1,5	M16x1,5	2,0:1	
II36068	DB2247	6	M16x1,5	M16x1,5	M16x1,5	1,35:1	
SMP2A	-	7	M16x1,5	M16x1,5	M16x1,5	1,5:1	
SMP2B	-	7	M16x1,5	M16x1,5	M16x1,5	2,0:1	
SMP2C	-	7	M16x1,5	M16x1,5	M16x1,5	2,7:1	
SMP2D	-	7	M16x1,5	M16x1,5	M16x1,5	1,5:1	

19. Adapter Valves



Key:

- Preferred Product












Part Number	Type No.	Fig.	Port Sizes		Pressure [bar]		
			Supply	Delivery	Inlet	Outlet	
107022	-						
AC175A	-		M22 & M16x1,5	M22x1,5	2,5	1,8	
AC175C	-		M22 & M16x1,5	M22x1,5	2,0	1,4	
AC175D	-		M22 & M16x1,5	M22x1,5	3,0	2,1	
AC176A	-		M22 & M16x1,5	M22x1,5	1,8	1,2	
SEB01296	DB2138		M16x1,5	M16x1,5			
• SEB01313	DB2139	1	M16x1,5	M16x1,5	2,1	1,2	
SEB01538	DB2144		M16x1,5	M16x1,5	3,5	1,8	
K001893	DB2145		M16x1,5	M16x1,5	5,1	3,65	
SEB01539	DB2145		M16x1,5	M16x1,5	5,1	3,65	

20. Trailer Control Valves



Key:

- IS Integrated Silencer
- SD Integral Supply Dump
- Preferred Product

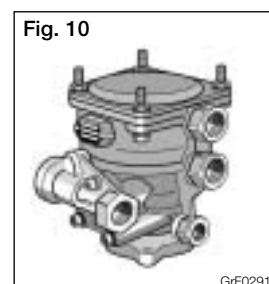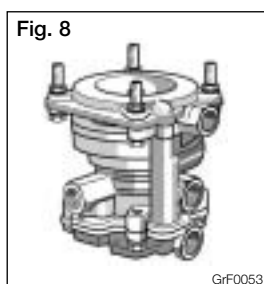

Part Number	Type No.	Fig.	Port Sizes		Predominance [bar]	Comment/Key	
			Supply/Delivery	Control			
0481061003000	-	1	M16x1,5	M16x1,5	0,5		
0481061004000	-	2	M16x1,5	M16x1,5	0...0,2		
0481061005000	-	2	M16x1,5	M16x1,5	-		
0481061007000	-	2	M16x1,5	M16x1,5	0,4...0,6		
0481061013000	-	2	M16x1,5	M16x1,5	-		
0481061020000	-	2	M16x1,5	M16x1,5	0...0,2		
0481061021000	-	2	M16x1,5	M16x1,5	0...0,2		
0481061022000	-	2	M16x1,5	M16x1,5	0,3...0,5		
0481061023000	-	2	M16x1,5	M16x1,5	0,4...0,6		
0481061025000	-	2	M16x1,5	M16x1,5	0,2...0,4		
0481061211000	-	3	M16x1,5	M16x1,5	0...0,2	SD	
0481061212000	-	3	M16x1,5	M16x1,5	0,2...0,4	SD	
0481061213000	-	4	M16x1,5	M16x1,5	-	SD	
0481061214000	-	4	M16x1,5	M16x1,5	-	SD	
0481061215000	-	4	M16x1,5	M16x1,5	0...0,5	SD	
0481061219000	-	5	M16x1,5	M16x1,5	0...0,25	SD	
0481061220000	-	4	M16x1,5	M16x1,5	0...0,2	SD	
0481061225000	-	4	M16x1,5	M16x1,5	0,4...0,6	SD	
0481061226000	-	5	M16x1,5	M16x1,5	0,1...0,3	SD	
0481061228000	-	5	M16x1,5	M16x1,5	0...0,25	SD	

Part Number	Type No.	Fig.	Port Sizes		Predominance [bar]	Comment/Key	
			Supply/Delivery	Control			
0481061230000	-	4	M16x1,5	M16x1,5	0,5...0,8	SD	
0481061231000	-	4	M16x1,5	M16x1,5	1,0...1,3	SD	
0481061232000	-	3	M16x1,5	M16x1,5	1,0...1,3	SD	
0481061233000	-	4	M16x1,5	M16x1,5	0...0,2	SD	
0481061234000	-	4	M16x1,5	M16x1,5	0,3...0,5	SD	
0481061245000	-	5	M16x1,5	M16x1,5	0,4...0,6	SD	
0481061248000	-	5	M16x1,5	M16x1,5	0,3...0,5	SD	
1194101	-	6	M16x1,5	M16x1,5	0,2	SD	
443612302001	-						
443612305702	-		M22x1,5	M22x1,5	0,2		
443612305708	-						
443612305752	-						
443612307702	-						
443612317000	-						
443612347000	-						
I46599	AB2750	7	M22x1,5	M14x1,5	0,3		
I60363	AB2761		M22x1,5	M16x1,5	0		
I75800	AB2764	2	M22x1,5	M16x1,5	0		
I71772	AB2772		M16x1,5	M16x1,5	0,2		
I77418	AB2778	8	M16x1,5	M16x1,5	-		
I76289	AB2780	9	M22x1,5	M16x1,5	0		
I87611	AB2815	9	M22x1,5	M16x1,5	0		
II17292	AB2822	8	M16x1,5	M16x1,5	-0,2		
I93362	AB2840	10	Voss NG12	Voss NG12	0,2	SD	
II15332	AB2846	10	Voss NG12	Voss NG12	0	SD	
II37151	AB2851	10	M22x1,5	M22&M16x1,5	0,7	SD	
II37152	AB2852		M22x1,5	M22x1,5	0,4	SD	
II33044	AB2854	10	M22x1,5	M16x1,5	0		
SEB01333	AB2860		M16x1,5	M16x1,5	0	SD	
SEB01542	AB2863		M16x1,5	M16x1,5	0,2	IS	
II31400	AB3405						
AC590A	-	8	M16x1,5	M16x1,5	0	IS	
AC595A	-	6	M16x1,5	M16x1,5	0,5	SD	
AC595B	-	6	M16x1,5	M16x1,5	0,2	SD	
AC595C	-	6	M16x1,5	M16x1,5	0,7	SD	
AC595E	-	6	M16x1,5	M16x1,5	0	SD	
AC595F	-	6	M16x1,5	M16x1,5	0,3	SD	
• AC596A	-	11	M22x1,5	M22x1,5	0,2	SD,IS	
• AC597A	-	12	M16x1,5	M16x1,5	0,3	SD,IS	
• AC597B	-	12	M16x1,5	M16x1,5	0,2	SD,IS	
• AC597BA	-	12	M16x1,5	M16x1,5	0,2	SD,IS	
• AC597BZ	-		M16x1,5	M16x1,5	0,2	SD	
• AC597C	-	12	M16x1,5	M16x1,5	0,3	SD,IS	
• AC597D	-	12	M16x1,5	M16x1,5	0	SD,IS	
• AC598A	-	12	M22x1,5	M22x1,5	0	SD,IS	
• AC598B	-	12	M22x1,5	M22x1,5	0,4	SD,IS	
• AC598C	-	12	M22x1,5	M22x1,5	0,7	SD,IS	
• AC599A	-	12	M22x1,5	M22x1,5	0,2	SD,IS	
KY1732/2	-	6	3/8" NPTF	3/8" NPTF		SD	
KY1738/2	-	6	3/8" NPTF	3/8" NPTF			



Part Number	Type No.	Fig.	Port Sizes		Predominance [bar]	Comment/Key	
			Supply/Delivery	Control			
KY1816/3	-	6	3/8" NPTF	3/8" NPTF		SD	
KY2106/3	-	6	3/8" NPTF	3/8" NPTF	0,5	SD	
KY2106/5	-	6	3/8" NPTF	3/8" NPTF	0,25	SD	
KY2106/8	-		3/8" NPTF	3/8" NPTF	0,1	SD	
KY2111/7	-		3/8" NPTF	3/8" NPTF	0		

21. Supply Dump Valves



Key:

- Preferred Product




Part Number	Type No.	Fig.	Port Sizes			
			Supply	Delivery	Control	
KY1482/1	-	1	1/2" NPTF	3/8" NPTF	1/4" x 18 NPTF	
KY1482/2	-	1	M22x1,5	M16x1,5	M16x1,5	
KY1482/8	-	1	M22x1,5	M16x1,5	M16x1,5	
• SDM2EK	-		M18x1,5	M18x1,5	M18x1,5	
SDM2GA	-		M16x1,5	M16x1,5	M16x1,5	
SDM2H	-		M18x1,5	M18x1,5	M18x1,5	
I67661	SV5210	2	M16x1,5	M16x1,5	M14x1,5	
I764521	SV5214	2	M16x1,5	M16x1,5	M14x1,5	

22. Coupling Heads

Key:

- B Colour black
- R Colour red
- SS Self sealing
- Y Colour yellow
- Preferred Product

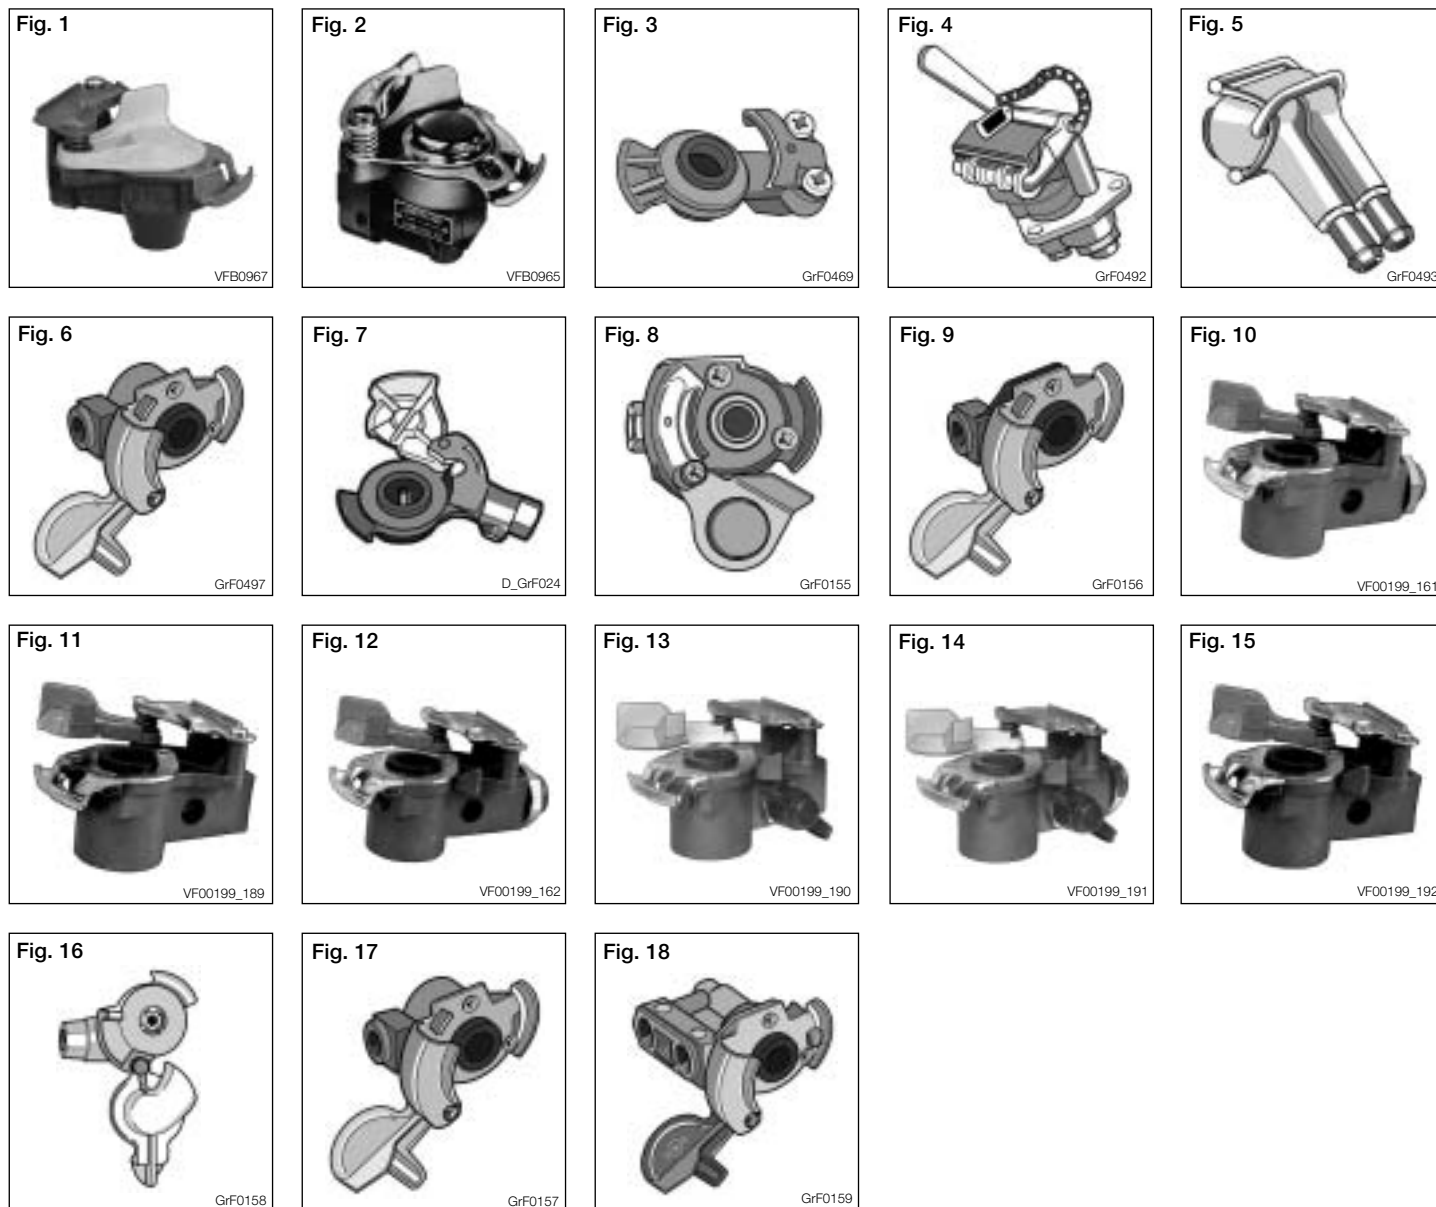

Part Number	Type No.	Fig.	Port Size	Comment/Key	
0484101003000	-				
0484101004000	-				
0484102020000	-	1	M16x1,5	R, SS	
0484102021000	-	1	M16x1,5	Y, SS	
• 0484102026000	-	1	M16x1,5	R, SS	
• 0484102027000	-	1	M16x1,5	Y, SS	
0484102028000	-	1	M22x1,5	R, SS	
0484102029000	-	1	M22x1,5	Y, SS	
0484150119000	-	2	M16x1,5	Y, SS	
0484150120000	-	2	M16x1,5	R	
1111413000	-		M10x1,0	B,SS	
114/1/5	-				

Part Number	Type No.	Fig.	Port Size	Comment/Key	
275150	-	3	1/2" NPTF	B	
278850	-	3	1/2" NPTF	Y	
278851	-	3	1/2" NPTF	R	
30030009	-				
30030009-1	-				
30030010	-				
30030010-1	-				
443612387700	-				
443612387703	-				
4528040120	-				
AC424A	-	4	M22x1,5	1)	
AC424B	-	4	M22/M18x1,5	1)	
AC424C	-	4	M16x1,5	1)	
AC424G	-	4	M22x1,5	1)	
AC424H	-	4	M20x1,5	1)	
AC424L	-	4	M20x1,5	1)	
AC424M	-	4	M20x1,5	1)	
AC426A	-	4	M22x1,5	1) 2)	
AC426B	-	4	M22/M18x1,5	1) 2)	
AC450A	-	5	F15	1)	
AC451A	-	5	F15	1)	
AC465A	-	5	F15	1) 2)	
AC466A	-	5	F15	1)	
AC474AA	-	6	M16x1,5	Y, SS	
AC475AA	-	6	M16x1,5	R, SS	
AC479A	-		M16x1,5	Y	
AC480A	-		M16x1,5	Y	
• AC480B	-		M18x1,5	Y, SS	
AC481A	-		M16x1,5	R	
• AC481B	-		M18x1,5	R, SS	
EX5	-				
I25011A	-				
I754221400	-	3			
I88448	KU1200	7	M22x1,5		
I59070	KU1303	8	M22x1,5		
II33262	KU1304	8	M22x1,5	Y	
II33263	KU1305	8	M22x1,5	R	
I59320	KU1306	8	M22x1,5	Y	
I59321	KU1307	8	M22x1,5	R	
II17354	KU1310	9	M16x1,5	R	
SEB00225	KU1310	9	M16x1,5	R	
II17355	KU1311	9	M16x1,5	Y	
SEB00226	KU1311	9	M16x1,5	Y	
SEB00229	KU1324		M16x1,5	Y	
K000067	KU1400	10	M24x1,5	R	
• K000952	KU1400	10	M24x1,5	R	
K000174	KU1401	11	M16x1,5	R	
• K000953	KU1401	11	M16x1,5	R	
K000068	KU1410	12	M16x1,5	Y	
• K000954	KU1410	12	M16x1,5	Y	

Part Number	Type No.	Fig.	Port Size	Comment/Key	
<i>I136181</i>	KU1411	13	M16x1,5	Y	
<i>K000173</i>	KU1411	13	M16x1,5	Y	
• <i>K000955</i>	KU1411	13	M16x1,5	Y	
<i>K000079</i>	KU1412	12	M24x1,5	Y	
• <i>K000956</i>	KU1412	14	M24x1,5	Y	
<i>K000172</i>	KU1413	12	M16x1,5	Y	
• <i>K000957</i>	KU1413	15	M16x1,5	Y	
<i>I68990</i>	KU4108	16	M16x1,5	Y	
<i>3660.0</i>	KU4124	17	M16x1,5	R, SS	
<i>3661.0</i>	KU4124	17	M16x1,5	R, SS	
<i>I58101</i>	KU4124	17	M16x1,5	R, SS	
<i>I71420</i>	KU4124	17	M16x1,5	R, SS	
<i>SEB00227</i>	KU4124	17	M16x1,5	R, SS	
<i>I76874</i>	KU4127	18	M16x1,5	R, SS	
<i>I59068</i>	KU4128	17	M16x1,5	Y, SS	
<i>I71421</i>	KU4128	17	M16x1,5	Y, SS	
<i>SEB00228</i>	KU4128	17	M16x1,5	R, SS	
<i>SEB00687</i>	KU4128	17	M16x1,5	Y, SS	
KU4129	-				
KU4130	-				









¹⁾ These Coupling Heads have both circuits combined

²⁾ Rubber tube for Semi-Trailer connection

23. Relay Emergency Valves

Key:

- M** Manual Load Sensing Valve function
- MV** With Manoeuvring Valve
- Preferred Product




Part Number	Type No.	Fig.	Port Sizes			Predominance [bar]	Comment/Key
			Supply	Delivery	Control		
109052	-		3/4" NPT	1/4" NPT	1/4" NPT	0,14	
1100512000	-		M26x1,5	M18x1,5	M18x1,5		
1100521000	-		M26x1,5	M18x1,5	M18x1,5		
2652.0	-						
281865	-	1	3/4"-3/8" PT	1/4"-3/8" PT	1/4" PT		
443612302000	-						
443612323000	-						
AC555A	-	2	M22x1,5	M22x1,5	M22x1,5		MV
AC555AK	-	3	M22x1,5	M22x1,5	M22x1,5		
AC556A	-	2	M22x1,5	M22&M16x1,5	M16x1,5	0,5	MV
AC556AK	-	3	M22x1,5	M22&M16x1,5	M16x1,5	0,5	
AC560AA	-		M22x1,5	M22x1,5	M22x1,5		MV
AC560BAK	-	4	M22x1,5	M30x1,5	M22x1,5		MV
AC563BK	-	4	M22x1,5	M30x1,5	M22x1,5		MV
• AS3000A	-	5	M22x1,5	M22x1,5	M22x1,5	0,5	
SEB00039	AS3012	6	M22x1,5	M22&M16x1,5	M22x1,5		
SEB00409	AS3018	6	M22&M16x1,5	M22&M16x1,5	M22x1,5	0	
• AS3050A	-	5	M22x1,5	M22x1,5	M22x1,5		
SEB01162	AS3054	6	M22&M16x1,5	M22&M16x1,5	M16x1,5		
• AS3100A	-	7	M22x1,5	M22x1,5	M22x1,5	0,5	MV
• AS3150A	-		M22x1,5	M22x1,5	M22x1,5		MV
SEB00034	AS3250	6	M22&M16x1,5	M22&M16x1,5	M16x1,5		
I59353	AS5203	8	M22x1,5	M22x1,5	M22x1,5		
I33804	AS6101	8	M22x1,5	M22x1,5	M22x1,5		
AS7000A	-		M22x1,5	M22x1,5	M22x1,5	0,5	M
I93553	AS7100	9	M22x1,5	M22x1,5	M22x1,5	0,5	M-MV
KY1001/3	-	1	3/4"-1/2" NPTF	1/4" NPTF	1/4" NPTF		
KY1497/1	-	1	3/4" NPTF/M22x1,5	M16x1,5	M12x1,5		

24. Single Check Valves



Key:

- Preferred Product

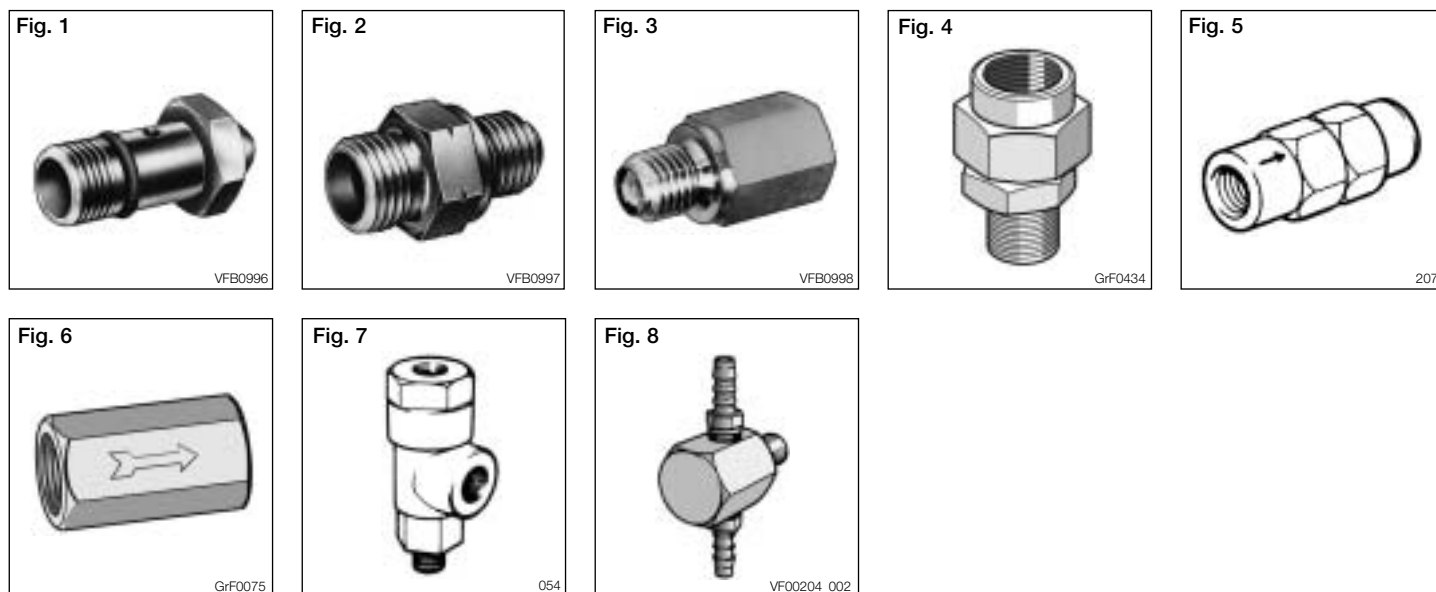





Part Number	Type No.	Fig.	Port Sizes		
			Supply	Delivery	
0500100005000	-	1	Ø 12mm	M12x1,5	
0500100006000	-	2	M14x1,5	M12x1,5	
0500100007000	-	3	M12x1,5	M12x1,5	
1111471000	-		G3/8"J	G3/8"J	
1111491000	-		M16x1,5	M16x1,5	
1186831	-	4	M22x1,5	M22x1,5	
1194016	-	5	M22x1,5	M22x1,5	
I25351	AE5101	6	M22x1,5	M22x1,5	
• I60422	AE5102	6	M22x1,5	M22x1,5	
I40939	AE5107	6	M16x1,5	M22x1,5	
I60884	AE5107	6	M16x1,5	M22x1,5	
I75598	AE5115	6	M22x1,5	M22x1,5	
SEB00511	AE5123	6	M22x1,5	M22x1,5	
K001349	AE5131	4	M22x1,5	M22x1,5	
I89720	-				
KW1873/1	-	7	1/8" NPTF	1/8" NPTF	
KW1873/10	-	7	M10x1,0	M10x1,0	
KW1873/9	-	7	1/8" NPTF	1/8" NPTF	
KW2966/1	-	4	1/2" NPTF	1/2" NPTF	
KW3205/1	-	4	1/2" NPTF	1/2" NPTF	
KW4455/1	-	4	M22x1,5	M22x1,5	
KW4617/2SP	-		M22x1,5	M22x1,5	
KW4648/1	-	4	M22x1,5	M22x1,5	
KW4827/1	-	4	1/4" NPTF	1/4" NPTF	
KX2016/1	-	8	3/8" NPTF	1/4" NPTF	

25. Double Check Valves



Key:

- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		
			Supply	Delivery	
0481058003000	-	1	M16x1,5	M16x1,5	
1111419000	-	2	M16x1,5	M16x1,5	
1111519000	-		M16x1,5	M16x1,5	
274671	-	2	1/4" NPTF	1/4" NPTF	
295036	-	3	3/8" NPTF	3/8" NPTF	
• 295358	-	3	M16x1,5	M16x1,5	
443612081001	-				
443612081004	-				
443612081005	-				
443612361000	-				
5003983	-		1/2" NPTF	1/2" NPTF	
AC253BK	-		M22x1,5	M22x1,5	
I14911	AE4100	4	M22x1,5	M22x1,5	
I15658	AE4102	4	1/4" NPTF	1/4" NPTF	
I17154	AE4103	4	1/2" NPTF	1/2" NPTF	
I40405	AE4105	5	M22x1,5	M22x1,5	
• I85731	AE4146	6	M16x1,5	M16x1,5	
I90168	AE4252	5	M16x1,5	M22x1,5	
I37739	DRV-1				
I69685	WV-10/1				

26. Differential Protection Valves



Key:

- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		
			Supply	Delivery	
KX1058/1	-	1	3/8" NPTF	3/8" NPTF	

27. Non-Return Valves

Key:

- Preferred Product

Fig. 1



Part Number	Type No.	Fig.	Port Sizes			
			Supply	Delivery	Exhaust	Control
0481060003000	-	1	M16x1,5	M16x1,5	M12x1,5	
I53417	AE4212	1	M16x1,5	M16x1,5		M12x1,5

28. Throttle Valves



Key:

- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		Max. Pressure [bar]	
			Supply	Delivery		
0481015002000	-	1	M12x1,5	M12x1,5	10	
• 0481015003000	-		M12x1,5	M12x1,5	10	
I79002	EDR1/6					
SEB00778	-					

29. Control Valves

Key:

- Preferred Product










Fig. 31





Fig. 32



Fig. 33



Fig. 34



Part Number	Type No.	Fig.	Port Sizes			Control	Actuation	Type
			Supply	Delivery	Exhaust			
0481007004000	-	1	M12x1,5	M12x1,5	M10x1,0		Foot	3/2
0481007008000	-	2	M12x1,5	M12x1,5			Hand	2/2
0481007012000	-	3	M10x1,0	M10x1,0			Hand	3/2
0481007015000	-	4	M12x1,5	M12x1,5	M12x1,5		Foot	2/2
0481007016000	-	5	M10x1,0			M10x1,0	Hand	3/2
0481007022000	-	5	M10x1,0	M10x1,0		M10x1,0	Hand	3/2
0481007023000	-	6	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
0481007027000	-	7	M10x1,0	M10x1,0			Hand	3/2
0481007028000	-	8	M10x1,0	M10x1,0		M10x1,0	Hand	3/2
0481007029000	-	6	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
0481007030000	-	6	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
0481007031000	-	6	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
0481007035000	-	9	M16x1,5	M16x1,5			Hand	3/2
0481007036000	-	10	M16x1,5	M16x1,5	M16x1,5		Foot	3/2
0481007037000	-	11	M16x1,5	M16x1,5		M16x1,5	Hand	4/2
0481007039000	-	12	M10x1,0	M10x1,0			Hand	4/3
0481007040000	-	10	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
0481007043000	-	9	M16x1,5	M16x1,5	M10x1,0		Hand	3/2
0481007046000	-	11	M16x1,5	M16x1,5		M16x1,5	Hand	4/2
0481007047000	-	13	M16x1,5	M16&M12x1,5	M12x1,5		Foot	3/2
0481007049000	-	14	M12x1,5	M12x1,5			Linkage	4/2
0481007052000	-	3	M10x1,0	M10x1,0			Hand	4/3
0481007056000	-	15	M10x1,0	M12&M10x1,0			Tripping pin	3/2
0481007057000	-	16	M12x1,5	M12x1,5			Foot	3/2
0481007059000	-	17	M10x1,0	M10x1,0			Hand	4/3
0481007060000	-	18	M10x1,0	M10x1,0			Hand/Elec. Switch	3/2
0481007061000	-	16	M12x1,5	M12x1,5			Foot	3/2
0481007062000	-	19	M12x1,5	M12x1,5			Foot	3/2
0481007066000	-		M10x1,0	M10x1,0		M10x1,0	Hand	3/2
0481007501000	-	20	M12x1,5	M12x1,5			Hand/Elec. Switch	3/3
0481007503000	-	20	M12x1,5	M12x1,5			Hand/Elec. Switch	3/3
0481007504000	-	21	M12x1,5	M12x1,5			Hand/Elec. Switch	3/3
• 0484351005000	-	22	M12x1,5	M12x1,5	M12x1,5		Hand	4/4
0484351007000	-	23	M12x1,5	M12x1,5	M12x1,5		Hand	4/4
• 0484351012000	-	24	M10x1,0	M10x1,0	M10x1,0		Hand	4/4
0500401001000	-		M12x1,5	M12x1,5		M12x1,5	Air	3/2
104263			1/8" PT	1/8" PT	1/8" PT		Hand	
1111430000	-		M10x1,0	M10x1,0	M6x1,0		Hand	

Part Number	Type No.	Fig.	Port Sizes			Control	Actuation	Type
			Supply	Delivery	Exhaust			
1111437000	-		M10x1,0	M10x1,0	M6x1,0		Hand	3/2
277516	-	25	1/8" NPTF	1/8" NPTF			Hand	2/2
279985	-	25	1/8" NPTF	1/8" NPTF			Hand	2/2
288374	-		1/8" NPT	1/8" NPT			Hand	2/2
30030001-1	-							
30030001-2	-							
5000824	-		M10x1,0	M10x1,0	1/8" NPTF		Air	
AC222D	-		M18x1,5	M14x1,5			Foot	3/2
AC280RN	-		M14x1,5	M14x1,5			Foot	
I58483	AE1107		M12x1,5	M12x1,5	M12x1,5		Hand	3/2
I67763	AE1109	26	M12x1,5	M12x1,5	M12x1,5		Hand	3/2
I677631	AE1109	26	M12x1,5	M12x1,5	M12x1,5		Hand	3/2
• I66920	AE1111	27	M10x1,0	M10x1,0			Hand	3/2
I73682	AE1114	27	M10x1,0	M10x1,0			Hand	3/2
I79027	AE1117		1/8" NPTF	1/8" NPTF			Hand	3/2
I79028	AE1118		1/8" NPTF	1/8" NPTF			Hand	3/2
I80289	AE1121		1/8" NPTF	1/8" NPTF			Hand	3/2
II30527	AE1136	27	M10x1,0	M10x1,0			Hand	3/2
I26755	AE1201	28	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
I75794	AE1206	29	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
I78964	AE1207	29	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
I79713	AE1208	30	M12x1,5	M12x1,5	M12x1,5		Foot	3/2
SEB00669	AE1223		M10x1,0	M10x1,0	¹⁾		Foot	3/2
SEB00670	AE1224		M10x1,0	M10x1,0	¹⁾		Hand	3/2
SEB00671	AE1225		M10x1,0	M10x1,0	¹⁾		Foot	3/2
SEB00672	AE1226	31	M10x1,0	M10x1,0	¹⁾		Foot	3/2
SEB00787	AE1227		M12x1,5	M12x1,5			Foot	2/2
I28323	AE2100	32	M22x1,5	M22x1,5			Hand	
I99961	AE2109	32	M22x1,5	M22x1,5			Hand	
II33261	AE2110		M22x1,5	M22x1,5			Hand	
CP1A	-		Ø6 mm	Ø6 mm			Foot	2/2
CP1C	-		M12x1,5	M12x1,5			Foot	2/2
CP3A	-		M12x1,5	M12x1,5			Foot	2/2
CP4A	-	33	M12x1,5	M12x1,5			Foot	3/2
CP4C	-	33	M12x1,5	M12x1,5			Foot	3/2
• CP6A	-	34	M12x1,5	M12x1,5			Foot	3/2
CP6B	-	34	M12x1,5	M12x1,5			Foot	3/2
• CP6C	-	34	M12x1,5	M12x1,5			Foot	3/2
CP6D	-	34	M12x1,5	M12x1,5			Foot	3/2
• CP6E	-		M12x1,5	M12x1,5			Foot	3/2
I30092	-		M14x1,5	M14x1,5		M10x1,0	Air	3/2
I30093	-		1/4" BSP	1/4" BSP		1/8" BSP	Air	3/2
• PU1AD	-						Foot	2/2
• PU1AS	-						Foot	2/2
• PU3AD	-						Foot	2/2
• PU3AS	-						Foot	2/2
• PU4AD	-						Foot	2/2
• PU4AS	-						Foot	2/2
I69739	WHEV-1/1							
I30062	WHV-6							

Part Number	Type No.	Fig.	Port Sizes			Control	Actuation	Type
			Supply	Delivery	Exhaust			
I30064	WHV-9							




¹⁾ Pipe 8,5 Dia

30. Park / Shunt Valves



Key:

EF	Emergency function	PRB	Pinned red button
NRV	Includes Non-Return Valve	•	Preferred Product



Part Number	Type No.	Fig.	Port Sizes		Comment/Key	
			Supply	Delivery		
30.1 Park / Shunt Valves						
II36128	AE4230	1	M16x1,5	M16x1,5	NRV,PRB	
• II36125	AE4246	1	M22x1,5	M22x1,5	NRV,PRB	
II36126	AE4246	1	M22x1,5	M22x1,5	NRV,PRB	
• II36127	AE4247	1	M16x1,5	M16x1,5	NRV,PRB	
• II36129	AE4247	1	M16x1,5	M16x1,5	NRV,PRB	
• II36131	AE4247	1	M16x1,5	M16x1,5	NRV,PRB	
• K000896	AE4311	2	M16x1,5	M16x1,5	EF	
• K001664	AE4311	2	M16x1,5	M16x1,5	EF	

30.2 Manoeuvring Valves

1100551010	-		M18x1,5	Ø 8mm	
1100567000	-		M16x1,5	M16x1,5	
AC286A	-		M22x1,5	M16x1,5	
<i>I68034</i>	AE4200	3	M22x1,5	M22x1,5	
<i>II36159</i>	AE4216	4	M22x1,5	M22x1,5	
<i>II36160</i>	AE4217	4	M16x1,5	M16x1,5	
<i>II36161</i>	AE4231		¹⁾	¹⁾	
<i>II36133</i>	AE4232		M22x1,5	M22x1,5	
<i>II36134</i>	AE4233		M16x1,5	M16x1,5	
<i>II16068</i>	AE4257	3	M22x1,5	M22x1,5	
• <i>II18068</i>	AE4257	3	M22x1,5	M22x1,5	
• <i>II19803</i>	AE4261	5	M22&M16x1,5	M16x1,5	
• <i>II19802</i>	AE4262	6	M22&M16x1,5	M16x1,5	
• <i>II36055</i>	AE4264	6	M16x1,5	M16x1,5	
• <i>II36061</i>	AE4265	5	M22&M16x1,5	M16x1,5	
• <i>II36062</i>	AE4266	5	M16x1,5	M16x1,5	

¹⁾ Flange


31. ABS Components



31.1 ECU

Key:

- Preferred Product

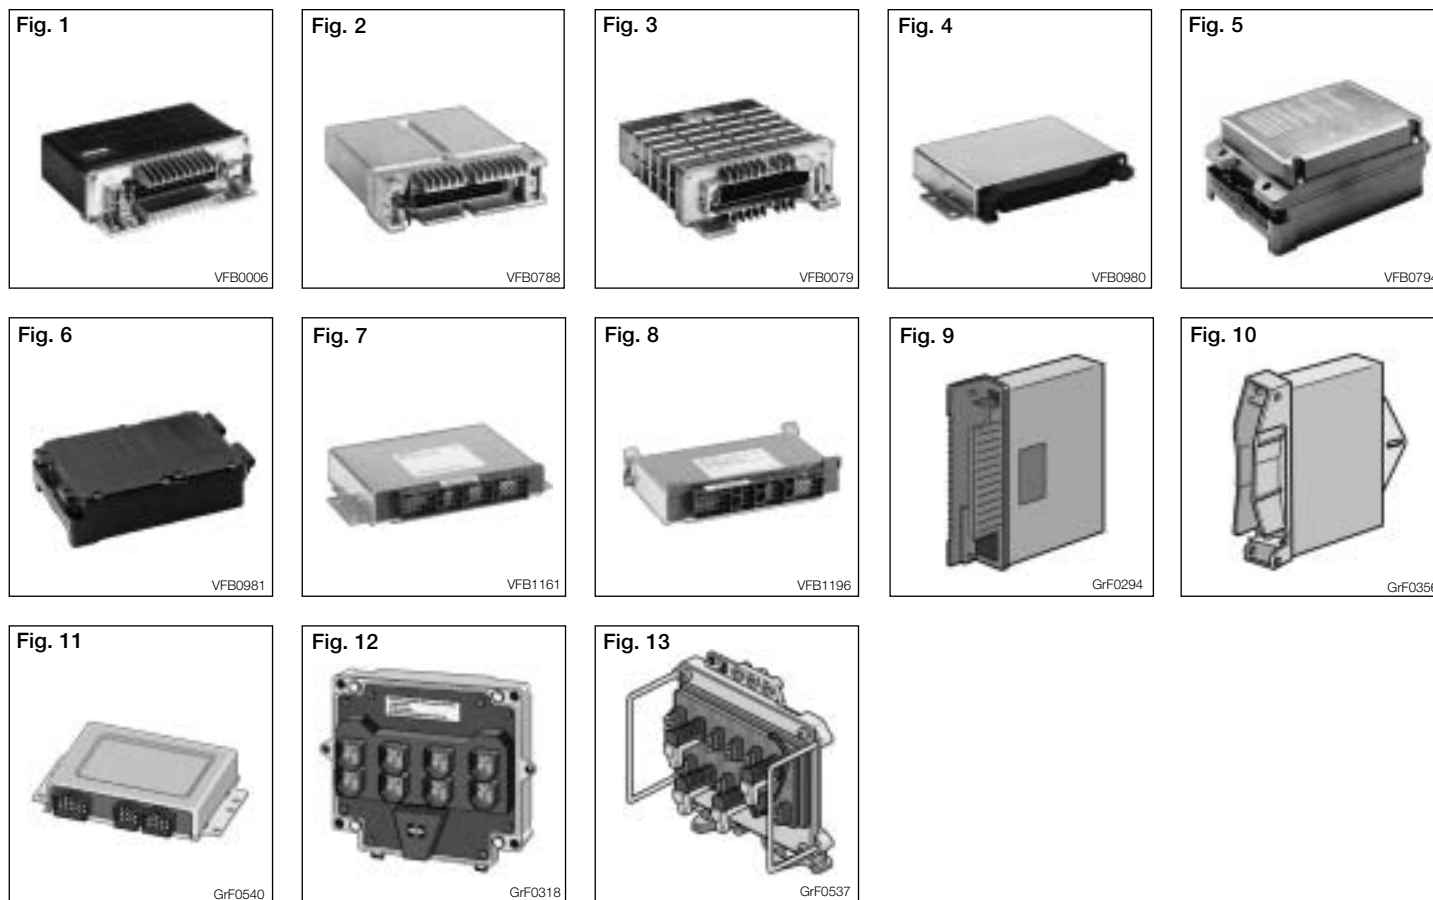

Part Number	Type No.	Fig.	Product Family	Voltage [V]	Configuration	Plug Type	Application
0265150315000	-	1	Gamma 2M	12/24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
0265150323000	-	2	L8	24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
0265150324000	-	3	Gamma 2M	24	ABS/ASR 4S/4M	55 Pins	Truck/Bus
0265150328000	-	2	I8	24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
0265150333000	-	1	Gamma 2M	24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
0265150351000	-	4	Gamma 3E	24	ABS/ASR 4S/4M	55 Pins	Truck/Bus
0265151201000	-	5	A6	12/24	ABS 6S/4M	Single Plug	Trailer
0265151202000	-		ABS	12/24	ABS 6S/4M	Single Plug	Truck
0265151205000	-	6	A6	24	ABS 4S/3M	Single Plug	Trailer
0265151206000	-		ABS	24	ABS 2S/2M	Single Plug	Trailer
0265151207000	-	6	A9	24	ABS 2S/2M	Single Plug	Trailer
0265151209000	-		ABS	24	ABS 2S/2M	Single Plug	Trailer
0265151302000	-	3	Gamma 3E	24	ABS/ASR 6S/6M	55 Pins	Bus
0265151304000	-	3	Gamma 3E	24	ABS/ASR 6S/6M	55 Pins	Bus
0486104001000	-		ABS	24	ABS 4S/3M	Modular(4)	Truck
0486104007000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Truck
0486104019000	-		ABS				Bendix
0486104021000	-		ABS				Japan
0486104022000	-		ABS				Japan
0486104023000	-		ABS	24	ABS/ASR 4S/4M	55 Pins	Truck/Bus
0486104024000	-	2	Gamma 2M	24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
0486104025000	-		ABS				Bendix


Part Number	Type No.	Fig.	Product Family	Voltage [V]	Configuration	Plug Type	Application
0486104028000	-	7	P8	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
0486104031000	-		ABS				
0486104032000	-	8	SKN	24	ABS/ASR 4S/4M	Modular(4)	Truck
0486104033000	-	7	CI12	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
• 0486104034000	-	7	CI12	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
0486104037000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
0486104038000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
• 0486104039000	-	7	EU12	24	ABS/ASR 6S/6M	Modular(5)	Bus
0486104040000	-		ABS	12/24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
0486104042000	-		ABS				
0486104044000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
• 0486104045000	-	7	EU12	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
0486104049000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
0486104050000	-		ABS	24	ABS/ASR 6S/6M	Modular(5)	Truck/Bus
0486104051000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Truck/Bus
0486104052000	-		ABS				Bendix
0486104053000	-		ABS				Bendix
0486104054000	-		ABS				Bendix
0486104056000	-		ABS	12	ABS/ASR 4S/4M	Deutsch	Truck
0486104058000	-		ABS	24	ABS/ASR 6S/6M	Modular(5)	Bus
0486104060000	-		ABS	24	ABS/ASR 4S/4M	Modular(4)	Bus
0486104102000	-		ABS	24	ABS 4S/4M	Modular(4)	Truck/Bus
0486104103000	-	7	ABS23	24	ABS 4S/3M	Modular(4)	Truck/Bus
0486104104000	-	7	ABS2x	24	ABS 4S/4M	Modular(4)	Truck/Bus
0486104106000	-		ABS	24	ABS 4S/4M-CAN	Modular(4)	Truck/Bus
0486104107000	-		ABS	24			Japan
0486104109000	-	7	ABS23	24	ABS 4S/4M	Modular(4)	Truck/Bus
0486104110000	-	7	ABS2x	24	ABS 4S/3M	Modular(4)	Truck/Bus
0486104112000	-		ABS				
0486104115000	-		ABS	24	ABS 4S/4M-CAN	Modular(4)	Truck/Bus
0486104117000	-		ABS	24	ABS 4S/4M-CAN	Modular(4)	Truck/Bus
0486104118000	-		ABS	12	ABS 4S/3M	Modular(4)	Truck/Bus
0486104119000	-		ABS	24	ABS 4S/3M	Modular(4)	Truck/Bus
0486105002000	-		A18			Deutsch	Trailer
I97256	ES1006	9	ABS	24			
I97006	ES1010	9	ABS	24			
II16773	ES1040	10	KB92	24	ABS/ASR 4S/4M	35 Pins	Truck/Bus
II17142	ES1043	10	ABS	24			
II30223	ES1080	11	ABS	24	ABS 4S/3M	Modular(3)	Truck
II14340	ES1200	12	¹⁾	24			
II33581	ES1210	13	KB3TA	24	ABS 4S/2M	Single Plug	Trailer
II33582	ES1215	13	KB3TA	24	ABS 4S/2M	Single Plug	Trailer
II35419	ES1216	13	KB3TA	24	ABS 4S/2M	Single Plug	Trailer

¹⁾ Contact Knorr-Bremse - **KB91A** is no longer available.

Key:

A Electrical connection Thread M27x1,0
B Electrical connection Bayonet
C Electrical connection Thread M24x1,0
R With Relay function
• Preferred Product

D Electrical connection DIN Bayonet
E Electrical connection Packard

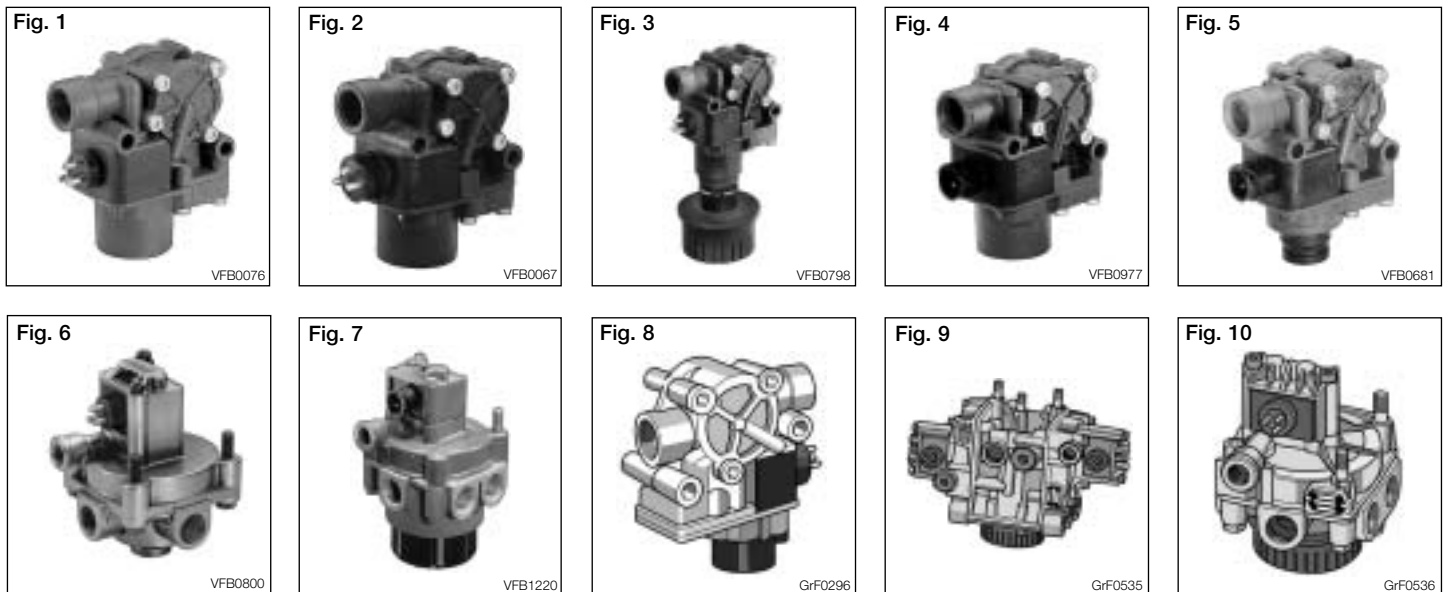


Part Number	Type No.	Fig.	Port Sizes		Control	Voltage [V]	Plug Type	Comment/Key
			Supply	Delivery				
0265351101000	-	1	M22x1,5	M22x1,5	-	24	A	Truck/Bus
0265351102000	-	2	M22x1,5	M22x1,5	-	24	B	Truck/Bus
0265351104000	-	1	1/2"-14 NPT	1/2"-14 NPT	-	12	C	Truck/Bus
0265351108000	-	1	M22x1,5	M22x1,5	-	24	A	Truck/Bus
0265351109000	-		M22x1,5	M22x1,5	-	24	C	Truck
0265351110000	-	3	M22x1,5	M22x1,5	-	24	C	Bus
0265351114000	-	1	M22x1,5	M22x1,5	-	24	C	Truck/Bus
0265351118000	-	4	Voss NG12	Voss NG12	-	24	B	Truck/Bus
0265351122000	-	5	Voss NG12	Voss NG12	-	24	B	Truck/Bus
0265351201000	-	6	M22x1,5	M22x1,5	M16x1,5	24	C,R	Trailer
0486201008000	-		1/2"-14 NPT	1/2"-14 NPT	-	24	C	Truck/Bus
0486201011000	-		Voss NG12	Voss NG12	-	24	D	Truck/Bus
0486201012000	-		1/2"-14 NPT	1/2"-14 NPT	-	24	C	Truck/Bus
0486201017000	-		Voss NG12	Voss NG12	-	24	D	Truck/Bus
0486201020000	-		1/2"-14 NPT	1/2"-14 NPT	-	12	D	Truck/Bus
0486202001000	-		M22x1,5	M22x1,5		24	C	Trailer
0486202002000	-	7	M22x1,5	M22x1,5	M16x1,5	24	B,R	Trailer
0486202010000	-		M22x1,5	M22x1,5		24	D	
0486202011000	-		M22x1,5	M22x1,5	M16x1,5	24	D	Trailer
II15492	BR9150	8	M22x1,5	M22x1,5	-	24	B	Truck/Bus
II15687	BR9151	8	M22x1,5	M22x1,5	-	24	C	Truck/Bus
II16278	BR9152	8	M22x1,5	M22x1,5	-	24	C	Truck/Bus
• II17776	BR9154	8	M22x1,5	M22x1,5	-	24	B	Truck/Bus
• II32612	BR9156	8	M22x1,5	M22x1,5	-	24	B	Truck/Bus
II35462	BR9157	8	M22x1,5	M22x1,5	-	24	D	Truck/Bus
II40864F	BR9159		Voss NG12	Voss NG12	-	24	D	Truck/Bus
II32618	BR9161	8	1/2"-14 NPT	1/2"-14 NPT		12	E	
II37084	BR9162	8	1/2"-14 NPT	1/2"-14 NPT		12	E	

Part Number	Type No.	Fig.	Port Sizes		Control	Voltage [V]	Plug Type	Comment/Key
			Supply	Delivery				
<i>II38659F</i>	BR9163	8	1/2"-14 NPT	1/2"-14 NPT	-	12	C	Truck/Bus
<i>II38660F</i>	BR9164	8	1/2"-14 NPT	1/2"-14 NPT	-	12	D	Truck/Bus
<i>II37086</i>	BR9180		Voss NG12	Voss NG12	-	24	D	Truck/Bus
<i>II38665F</i>	BR9182	8	Voss NG12	Voss NG12	-	24	D	Truck/Bus
<i>II30522</i>	BR9231	9	M22x1,5	M22x1,5	M16x1,5	24	C,R	Trailer
<i>II32614</i>	BR9232	10	M22x1,5	M16x1,5	M16x1,5	24	C,R	Trailer
• <i>II37090</i>	BR9233	9	M22x1,5	M16x1,5	M16x1,5	24	B,R	Trailer
<i>II37091</i>	BR9234		M22x1,5	M22x1,5	M16x1,5	24	B,R	Trailer
<i>II40868F</i>	BR9235		3/4"-14 NPT	3/8"-18 NPT	-	12	D	Trailer

Key:

- Preferred Product

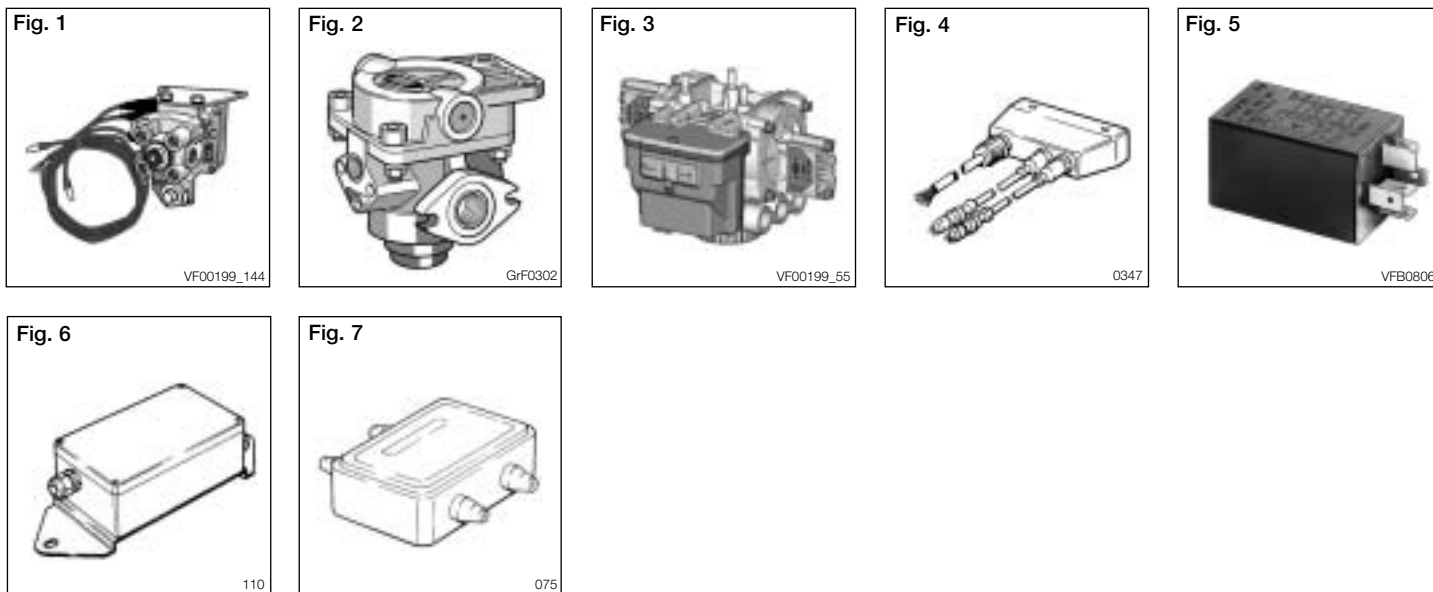

Part Number	Type No.	Fig.	Comment/Key
1189031	-	1	Replaced by KB4T

31.4 ABS Retrofit Kit - KB4T - Contents

Part Number	Type No.	Fig.	Description	Qty
1141975000	-		M22x1,5 - M16x1,5 Adaptor	9
1190392	-		Bracket	1
2264462373000	-		Connecting Cable	1
2264462386000	-		Connecting Cable	1
SEB00407	AS3000A	2	Relay Emergency Valve	1
II36413	ES2005	3	A18 ABS Boxer Assembly	1
KB7623	-		M22x1,5 Blanking Plug	2
KB7635	-		M22 Washer	11
KBP2095/1	-		Information Label	1
KBP2127/3	-		Installation Instructions	1

31.5 Wiring Harness

Part Number	Type No.	Fig.	Product Family
1189076SP	-	4	AL-4T

31.6 ABS Switch Device

Part Number	Type No.	Fig.	Voltage [V]	Comment/Key
0265152004000	-	5	24	6 x DIN 46 244
0265152005000	-		12	6 x DIN 46 244
1188858	-	6	24	Power Interface Module for AL-4T
1189083	-	7	24	Electrical Wiring Unit for AL-4T

Key:

PR	Plug type round
SR	Socket type round
PL	Plaselec
ITT	ITT Cannon
Sc	Schlemmer
G	G & H
DT	Deutsch DT
V	Volvo
A	90 Degrees
B	Straight
C	90 Degrees with Screw Mounting DF6
ST	With Special Protection Tube
CT	With Corrugated Protection Tube
•	Preferred Product



VFB0986




VFB0987




VFB0978



VFB0973



VFB0989



VFB0943



VFB0990



VF00199_226



VFB1200



VFB1201



VF00199_227



GrF0299


Part Number	Type No.	Fig.	Length [m]	Sensor Type	Electrical Connection	Protection Tube	Replaced by (After April 2004)
0265004011000	-		1,4	A	SR	-	0486000185000
0265004012000	-		1,4	A	SR	-	0486000186000
0265004015000	-		1,3	B	SR	-	0486001062000
0265004016000	-		1,5	B	PR	-	0486001063000
0265050102000	-	1	0,475	A	SR	ST	0486000187000
0265050103000	-	2	0,475	A	PR	ST	0486000188000
0265050109000	-	3	1,4	A	PL	CT	
0265050112000	-	4	1,87	A	-	CT	
0265050114000	-	1	0,485	A	SR	CT	
0265050116000	-	1	0,495	A	SR	CT	
0265050117000	-	2	0,495	A	PR	CT	
0265050118000	-	1	0,515	A	SR	CT	0486000189000

Part Number	Type No.	Fig.	Length [m]	Sensor Type	Electrical Connection	Protection Tube	Replaced by (After April 2004)
0265050119000	-	2	0,515	A	PR	CT	0486000190000
0265050123000	-	2	0,125	A	SR	CT	
0265050129000	-	5	3,555	A	-	-	
0265050132000	-	7	0,37	A	PR	-	0486000191000
0265050140000	-	5	1,3	A	-	-	0486000181000
0265050141000	-	3	2,1	A	PL	CT	0486000223000
0265050142000	-	3	2,1	A	PL	CT	0486000224000
0265050147000	-	5	2,0	A	-	-	0486000134000
0265050148000	-	6	0,4	A	PL	-	0486000135000
0265050149000	-	6	2,0	A	SR	-	0486000136000
0265050150000	-	6	1,0	A	SR	-	0486000137000
0265050151000	-	5	2,5	A	-	-	0486000138000
0265050152000	-	5	8,0	A	-	-	0486000222000
0486000019000	-		0,4	A	SR	-	
0486000020000	-		2,0	A	SR	-	
0486000023000	-	7	1,85	A	ITT	-	
0486000036000	-		1,7	A	SR	-	
0486000039000	-		1,4	A	SR	CT	0486000229000
0486000042000	-		1,99	A	PR	CT	0486000183000
0486000044000	-		1,3	A	SC	CT	0486000233000
0486000045000	-		1,7	A	SC	CT	0486000234000
0486000046000	-		1,3	A	SC	CT	0486000235000
0486000047000	-		1,7	A	SC	CT	0486000236000
0486000048000	-		1,3	A	SC	CT	0486000237000
0486000049000	-		2,0	A	SC	CT	0486000238000
0486000050000	-		1,3	A	SC	CT	0486000239000
0486000051000	-		2,0	A	SC	CT	0486000240000
0486000052000	-		2,0	A	SC	CT	0486000241000
0486000053000	-		2,0	A	SC	CT	0486000242000
0486000056000	-		3,55	A	SC	CT	0486000245000
0486000064000	-	8	3,0	A	-	-	
0486000065000	-		2,395	A	-	-	0486000248000
0486000070000	-		2,0	A	-	-	0486000130000
0486000089000	-		1,050	A	-	-	0486000131000
0486000091000	-		2,55	A	-	-	0486000132000
0486000092000	-		3,55	A	-	-	
0486000093000	-		2,15	A	G	CT	0486000210000
0486000094000	-		2,15	A	G	CT	0486000211000
0486000095000	-		1,85	A	G	CT	0486000212000
0486000096000	-		1,85	A	G	CT	0486000213000
0486000097000	-		1,5	A	G	CT	0486000214000
0486000098000	-		1,5	A	G	CT	0486000215000
0486000100000	-		0,5	C	SR	-	
0486000101000	-		2,0	C	SR	-	
0486000102000	-		2,5	C	-	-	
0486000103000	-		2,5	C	SC	CT	
0486000104000	-		2,5	C	SC	CT	
0486000105000	-		1,45	C	ITT	CT	
0486000106000	-		1,97	C	ITT	CT	
0486000107000	-		1,0	C	V	CT	

Part Number	Type No.	Fig.	Length [m]	Sensor Type	Electrical Connection	Protection Tube	Replaced by (After April 2004)
0486000108000	-		1,4	C	PL	CT	
0486000109000	-		1,4	C	PL	CT	
0486000114000	-		3,3	A	DT	CT	0486000178000
0486000115000	-		3,0	A	DT	CT	0486000179000
0486000120000	-		2,5	C	SR	CT	
0486000121000	-		2,5	C	SR	CT	
0486000124000	-		2,15	A	G	CT	0486000216000
0486000125000	-		2,15	A	G	CT	0486000217000
• 0486000126000	-	1	0,4	A	SR	-	
• 0486000128000	-		1,0	A	SR	-	
0486000129000	-		2,0	A	SR	-	
0486000143000	-		2,8	A	G	CT	0486000258000
0486000144000	-		2,8	A	G	CT	0486000259000
0486000145000	-		1,8	A	G	CT	0486000260000
0486000146000	-		1,8	A	G	CT	0486000261000
0486000148000	-		3,56	A	G	CT	0486000262000
0486000149000	-		3,56	A	G	CT	0486000263000
0486000215000	-		2,15	A	G	CT	0486000255000
0486001003000	-	9	2,0	B	SC	CT	0486001041000
0486001004000	-	9	2,0	B	SC	CT	0486001042000
0486001005000	-		2,0	B	SR	-	0486001043000
0486001017000	-	11	1,65	B	SR	-	
0486001029000	-		0,35	B	SR	-	
• 0486001030000	-		1,7	B	SR	-	
0486002001000	-		2,6	C	G	CT	
0486002002000	-		2,6	C	G	CT	
1187001	-		2,5	B			
1187002	-		2,5	A			
1189075SP	-	12	0,4	A			
5001327	-		1,5	A			
II16761	ES5010	12	2,0	A			0486000130000
II16762	ES5011	8	1,3	A			0486000181000
II37082	ES5024	8	2,0	A			0486000129000
II36394	ES5060	8	2,5	A			0486000132000
II36395	ES5061	8	3,0	A			0486000064000

Key:

- Preferred Product

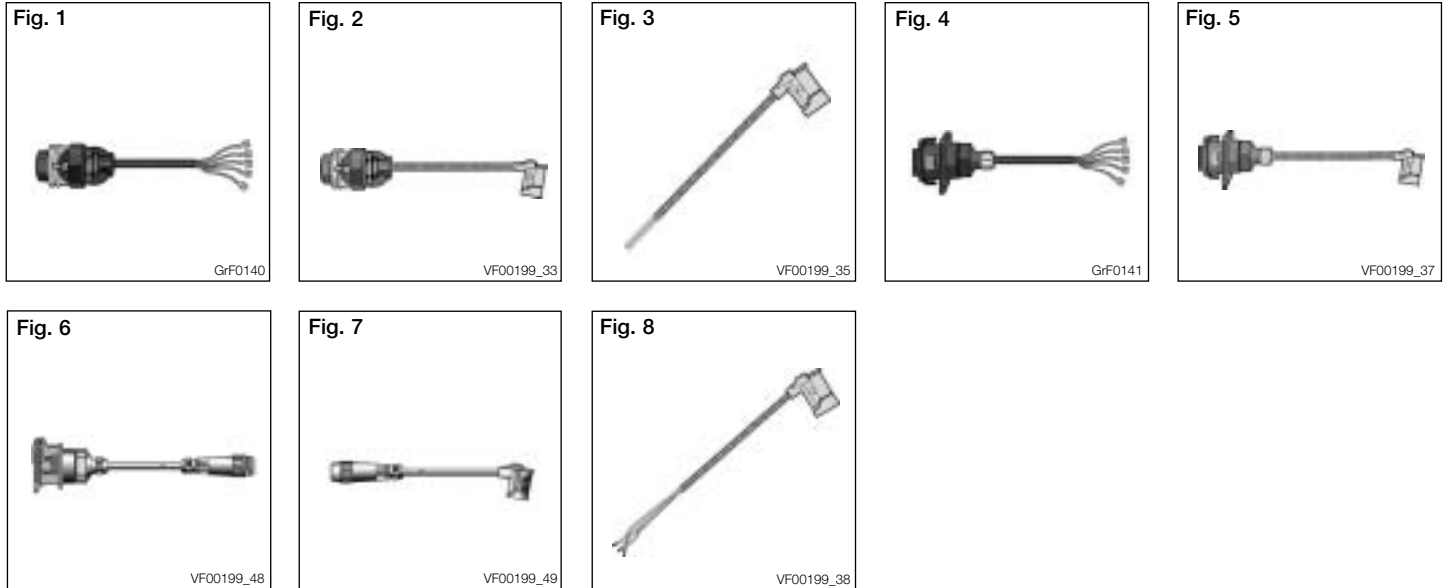

Part Number	Type No.	Fig.	Length [m]	Comment/Key	
2264462330000	-		10,0		
2264462345000	-		10,0		
2264462346000	-		12,0		
2264462349000	-		10,0		
2264462396000	-		8,0	TABS with Socket	
2264462397000	-		12,0	TABS with Socket	
2264462398000	-		14,0	TABS with Socket	
2264462400000	-		10,0	TABS with Plug	
I9725710000	EK3020	1	10,0	TABS with Plug	
II3541510000	EK3022	2	10,0	TABS with Plug	
II3541512000	EK3022	2	12,0	TABS with Plug	
II354156000	EK3022	2	6,0	TABS with Plug	
II354158000	EK3022	2	8,0	TABS with Plug	
II354159000	EK3022	2	9,0	TABS with Plug	
II3640412000	EK3024	3	12,0	TABS with Plug	
II3640415000	EK3024	3	15,0	TABS with Plug	
II3640423000	EK3024	3	23,0	TABS with Plug	
I9725812000	EK3025	4	12,0	TABS with Socket	
I9725815000	EK3025	4	15,0	TABS with Socket	
I972586000	EK3025	4	6,0	TABS with Socket	
II3358810000	EK3027	5	10,0	TABS with Socket	
II3358812000	EK3027	5	12,0	TABS with Socket	
II3358813000	EK3027	5	13,0	TABS with Socket	
II3358814000	EK3027	5	14,0	TABS with Socket	
II3358815000	EK3027	5	15,0	TABS with Socket	
II335888000	EK3027	5	8,0	TABS with Socket	
II335889000	EK3027	5	9,0	TABS with Socket	
II3641712000	EK3028	6	12,0	TABS with Socket	
II3641714000	EK3028	6	14,0	TABS with Socket	
II36418500	EK3029	7	0,5	Adapter	

Part Number	Type No.	Fig.	Length [m]	Comment/Key	
<i>II3358712000</i>	EK3040	8	12,0	Cable Assembly	
<i>II335874000</i>	EK3040		4,0	Cable Assembly	
<i>II335875000</i>	EK3040	8	5,0	Cable Assembly	
<i>II335878000</i>	EK3040	8	8,0	Cable Assembly	
II39452F	-		-	MTS	

Key:

L1 Power Supply ISO1185




L2 Diagnostics

L3

•

Power Supply DIN ISO7638 + CAN

Preferred Product

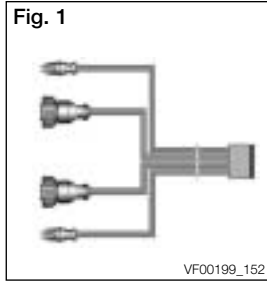

Part Number	Type No.	Fig.	L1 [m]	L2 [m]	L3 [m]	Comment/Key
2264462373000	-	1	0,5	3,0		TABS
2264462374000	-	1	0,5	4,0		TABS
2264462375000	-	1	0,5	6,5		TABS
2264462380000	-	1	3,0	4,0		TABS
2264462391000	-	2	0,5	3,0		TABS with Diagnostics
2264462392000	-	2	0,5	5,0		TABS with Diagnostics
2264462403000	-	1	3,0	0,5	6,5	TABS with Diagnostics
II367391	EK3100		0,5	4,0	1,0	TEBS
II367393	EK3100		0,5	6,0	1,0	TEBS
II367395	EK3100		0,5	4,0	12,0	TEBS
II367396	EK3100		0,5	5,0	12,0	TEBS
II367397	EK3100		0,5	6,0	12,0	TEBS
II367381	EK3101		0,5	4,0		TEBS
II367382	EK3101		0,5	5,0		TEBS

31.10 Diagnostic Cables





Part Number	Type No.	Fig.	Length [m]	Comment/Key
II354183000	EK3050	3	3,0	TABS
II354184000	EK3050	3	4,0	TABS
II354185000	EK3050	3	5,0	TABS
II354188000	EK3050	3	8,0	TABS
II39812F	EZ1032		-	With UDIF-Bajonett
Z005464	EZ1033		-	With UDIF-Amphenol

31.11 Adapter Cables

Part Number	Type No.	Fig.	Length [m]	Comment/Key
0486010002000	-		4,13	TABS Diagnostics
II354343000	EZ1020		-	KB3TA Diagnostics
II39808F	EZ1034		-	TEBS CAN Diagnostics
II36753	-		-	ESP (SAS)
II40662F	-		-	MTS
II40663F	-		-	MTS
II40664F	-		-	MTS
II40665F	-		-	MTS
Z001548	-		-	
Z001655	-		-	MTS
Z001656	-		-	

Key:

- Preferred Product




Part Number	Type No.	Fig.	Aux 1	Aux 2	CAN	Sensor A	Sensor B	Comment/Key
2264460307000	-		4,0	-	-	-	-	ABS
2264461302000	-							
2264461304000	-							
2264461307000	-		4,0	-	-	-	-	
2264461308000	-		6,0	-	-	-	-	ABS
2264461309000	-		9,0	-	-	-	-	ABS
2264461310000	-		12,0	-	-	-	-	ABS
2264461313000	-		5,0	-	-	-	-	ABS
2264461316000	-		0,5	-	-	-	-	ABS
2264461321000	-		1,3	-	-	-	-	ABS
2264461322000	-		3,0	-	-	-	-	ABS
2264461323000	-		4,0	-	-	-	-	ABS
2264461324000	-		6,0	-	-	-	-	ABS
2264461327000	-		12,0	-	-	-	-	ABS
2264461333000	-		12,0	-	-	-	-	ABS
2264461354000	-		4,0	-	-	-	-	ABS
2264461355000	-		6,0	-	-	-	-	ABS
2264462328000	-		10,0	-	-	-	-	ABS
2264462355000	-		9,0	-	-	-	-	ABS
2264462368000	-		14,0	5,0	-	-	-	ABS
2264462369000	-		12,0	5,0	-	-	-	ABS
2264462370000	-							ABS
2264462371000	-		10,0	5,0	-	-	-	ABS
2264462386000	-							ABS
2264462390000	-							ABS
9481211431	-							
9481211432	-							
9481211433	-							
9481211434	-							
9481211435	-							

Part Number	Type No.	Fig.	Aux 1	Aux 2	CAN	Sensor A	Sensor B	Comment/Key
9481211436	-							
9481211437	-							
9481211438	-							
I9725512000	EK3010	1	12,0	-	-	-	-	ABS
I9725515000	EK3010	1	15,0	-	-	-	-	ABS
I972553000	EK3010	1	3,0	-	-	-	-	ABS
I972554000	EK3010	1	4,0	-	-	-	-	ABS
I972555000	EK3010	1	5,0	-	-	-	-	ABS
I972556000	EK3010	1	6,0	-	-	-	-	ABS
I972559000	EK3010	1	9,0	-	-	-	-	ABS
II1415610000	EK3011		10,0	-	-	-	-	ABS
II1415612000	EK3011	2	12,0	-	-	-	-	ABS
II141563000	EK3011	2	3,0	-	-	-	-	ABS
II141564000	EK3011	2	4,0	-	-	-	-	ABS
II141566000	EK3011	2	6,0	-	-	-	-	ABS
II141568000	EK3011		8,0	-	-	-	-	ABS
II3541710000	EK3013	3	10,0	-	-	-	-	ABS
II3541712000	EK3013	3	12,0	-	-	-	-	ABS
II3541715000	EK3013	3	15,0	-	-	-	-	ABS
II354172000	EK3013	3	2,0	-	-	-	-	ABS
II354173000	EK3013	3	3,0	-	-	-	-	ABS
II354174000	EK3013	3	4,0	-	-	-	-	ABS
II35417500	EK3013	3	0,5	-	-	-	-	ABS
II354175000	EK3013	3	5,0	-	-	-	-	ABS
II354176000	EK3013	3	6,0	-	-	-	-	ABS
II354177000	EK3013	3	7,0	-	-	-	-	ABS
II354178000	EK3013	3	8,0	-	-	-	-	ABS
I9770410000	EK3015	4	10,0	-	-	-	-	ABS
I9770412000	EK3015	4	12,0	-	-	-	-	ABS
I9770415000	EK3015	4	15,0	-	-	-	-	ABS
I977045000	EK3015	4	5,0	-	-	-	-	ABS
II40391F2	EK3108	5	0,5	12,0	-	-	-	TEBS
II367541	EK3120		4,0	1,0	1,0	-	-	TEBS
II397871	EK3122		4,0	1,0	-	-	-	TEBS
II397872	EK3122		6,0	1,0	-	-	-	TEBS
II397881	EK3123		1,0	-	-	-	-	TEBS
II397882	EK3123		3,0	-	-	-	-	TEBS
II397883	EK3123		6,0	-	-	-	-	TEBS
II397941	EK3124		4,0	1,0	1,0	1,0	1,0	TEBS
II397942	EK3124		6,0	1,0	1,0	1,0	1,0	TEBS
II397951	EK3125	6	4,0	1,0	-	1,0	1,0	TEBS
II397952	EK3125	6	6,0	2,0	-	1,0	1,0	TEBS
II39814F1	EK3127	7	6,0	2,0	-	15,0	7,0	TEBS

Key:

- Preferred Product

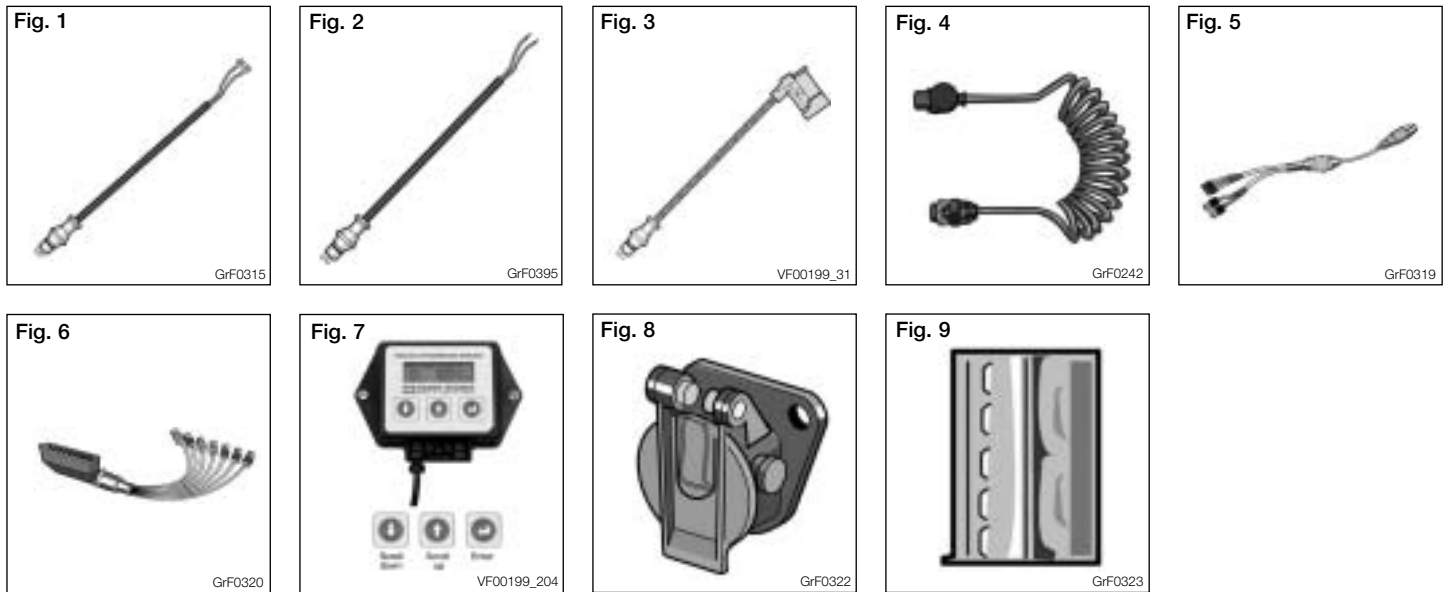

Part Number	Type No.	Fig.	Length [m]	Comment/Key	
2264460310000	-		2,0	TABS/WSS	
2264460311000	-		3,0	TABS/WSS	
2264460312000	-		5,0	TABS/WSS	
2264460313000	-		8,0	TABS/WSS	
2264460314000	-		10,0	TABS/WSS	
2264460315000	-		12,0	TABS/WSS	
2264460332000	-		3,0	TABS/WSS	
2264460334000	-		5,0	TABS/WSS	
2264460336000	-		8,0	TABS/WSS	
2264460337000	-		10,0	TABS/WSS	
I9702110000	EK3000	1	10,0	TABS/WSS	
I9702112000	EK3000	1	12,0	TABS/WSS	
I9702115000	EK3000	1	15,0	TABS/WSS	
I970213000	EK3000	1	3,0	TABS/WSS	
I970215000	EK3000	1	5,0	TABS/WSS	
I970218000	EK3000	1	8,0	TABS/WSS	
II1563910000	EK3001	2	10,0	TABS/WSS	
II1563912000	EK3001	2	12,0	TABS/WSS	
II156393000	EK3001	2	3,0	TABS/WSS	
II156395000	EK3001	2	5,0	TABS/WSS	
II156396000	EK3001	2	6,0	TABS/WSS	
II156398000	EK3001	2	8,0	TABS/WSS	
II3541610000	EK3003	3	10,0	TABS/WSS	
II3541612000	EK3003	3	12,0	TABS/WSS	
II3541615000	EK3003	3	15,0	TABS/WSS	
II354162000	EK3003	3	2,0	TABS/WSS	
II354163000	EK3003	3	3,0	TABS/WSS	
II354163500	EK3003	3	3,5	TABS/WSS	
II354164000	EK3003	3	4,0	TABS/WSS	
II354165000	EK3003	3	5,0	TABS/WSS	

Part Number	Type No.	Fig.	Length [m]	Comment/Key	
<i>II354166000</i>	EK3003	3	6,0	TABS/WSS	
<i>II354167000</i>	EK3003	3	7,0	TABS/WSS	
<i>II354168000</i>	EK3003	3	8,0	TABS/WSS	
<i>II354169000</i>	EK3003	3	9,0	TABS/WSS	
<i>II3674112000</i>	EK3110		12,0	TEBS	
<i>II3674115000</i>	EK3110		15,0	TEBS	
<i>II367419000</i>	EK3110		9,0	TEBS	
<i>II3979310000</i>	EK3115		10,0	TEBS	
<i>II397938000</i>	EK3115		8,0	TEBS	
<i>II367563000</i>	EK3130		3,0	TEBS	
<i>II367564000</i>	EK3130		4,0	TEBS	
<i>II367565000</i>	EK3130		5,0	TEBS	
<i>II367566000</i>	EK3130		6,0	TEBS	







31.14 ABS Accessories


Part Number	Type No.	Fig.	Length [m]	Comment/Key	
<i>II18181</i>	EK3030	4	4,8	ISO Plug 5 Pin	
<i>II14841</i>	EZ1000	5	-	Blinkcode Adapter	
<i>II14840</i>	EZ1010	6	-	Test Adapter	
<i>II36381</i>	EZ1022		-	Blinkcode Adapter	
<i>II36391</i>	EZ1025		-	Diagnostic Set	
<i>II39809F</i>	EZ1031		-	Diagnostic Set	
<i>II39810F</i>	EZ1035	7	-	Trailer Information Module (TIM)	
I88006	-		-	ISO Plug 7 Pin	
I88007	-	8	-	Dummy ISO Socket for Parking	
II14339	-		-	Mounting Kit KB91A	
II16774	-	9	-	Sensor Bush	
KB7638	-		4,0	ISO 7638 Plug 7 Pin	


32. ABS System Configurations


32.1 ABS System Configuration A18

No.	Description	Type / Part No.	2S/2M
1	Electronic Control Unit	0486105002000	1
2	Trailer module , consists of items 1 to 4.	ES2005 II36413	1
3	Modulator (ABS Relay Valve)	BR9234 II37091	2
4	ABS - Dual Relay Modulator Valve	BR9233 II37090	1
5	Wheel Speed Sensor Length 0,4 m	0265050148000	2
6	Sensor Bush	II16774	2
7	Power Supply Cable ISO 7638 with Plug for semi-trailer Available Lengths 10, 12 and 14 m Diagnostic Cable Available Lengths 5 and 12 m	See Table No. 7	1
8	Power Supply Cable ISO 7638 with Plug for semi-trailer Available Lengths 10, 12 and 14 m Power Supply Cable ISO 1185 Length 13 m Diagnostic Cable Available Lengths 5 and 12 m	See Table No. 8	1
9	Power Supply Cable ISO 7638 Length 0,5 m Diagnostic Cable Available Lengths 3, 5 and 12 m	1 See Table No. 9	
10	Power Supply Cable ISO 7638 Length 0,5 m Power Supply Cable ISO 7638 Length 13 m Diagnostic Cable Available Lengths 5 and 12 m	1 See Table No. 10	
11	Power Supply Cable ISO 7638 with Plug for semi-trailer Available Lengths 8, 12 and 14 m	See Table No. 11	1
12	Power Supply Cable ISO 7638 with Plug for drawbar and centre axle trailer Available Lengths 8, 10 m	See Table No. 12	1
13	Extension Cable for Wheel Speed Sensor Available Lengths 3, 4 and 6,5 m Modulator Valve Available Lengths 0,5, 1,5, 3 and 6 m	See Table No. 13	
/	Magic Eye	2267200315000	1
14	Blinkcode Adapter	EZ1022 II36381	1


1  VF 00199_145	2  VF 00199_55	3  GrF 0536
4  GrF 0535	5  GrF 0355	6  GrF0323

7		ISO 7638			ISO 1185	Diagnostic	
		10 m	12 m	14 m	13 m	5 m	12 m
 VF 00199_146	2264462368000			X		X	
	2264462369000		X			X	
	2264462370000		X				X
	2264462371000	X				X	
	2264462372000	X					X


8		ISO 7638			ISO 1185	Diagnostic	
		10 m	12 m	14 m	13 m	5 m	12 m
 VF 00199_147	2264462386000		X		X	X	
	2264462387000		X		X		X
	2264462388000	X			X	X	
	2264462389000	X			X		X
	2264462390000			X	X	X	

9		ISO 7638					ISO 1185	Diagnostic		
		0,5 m	8 m	10 m	12 m	14 m	13 m	3 m	5 m	12 m
	2264462391000	X						X		
	2264462392000	X							X	
	2264462393000	X								X


VF 00199_148

10		ISO 7638					ISO 1185	Diagnostic		
		0,5 m	8 m	10 m	12 m	14 m	13 m	3 m	5 m	12 m
	2264462394000	X					X		X	
	2264462395000	X					X			X


VF 00199_149

11		ISO 7638					ISO 1185	Diagnostic		
		0,5 m	8 m	10 m	12 m	14 m	13 m	3 m	5 m	12 m
	2264462396000		X							
	2264462397000				X					
	2264462398000					X				

VF 00199_150

12		ISO 7638					ISO 1185	Diagnostic		
		0,5 m	8 m	10 m	12 m	14 m	13 m	3 m	5 m	12 m
	2264462399000		X							
	2264462400000			X						

VF 00199_151

13		Dual Relay Modulator Valve				Wheel Speed Sensor		
		0,5 m	1,5 m	3 m	6 m	3 m	4 m	6,5 m
	2264462373000	X				X		
	2264462374000	X					X	
	2264462375000	X						X
	2264462376000		X			X		
	2264462377000		X				X	
	2264462378000		X					X
	2264462379000			X		X		
	2264462380000			X			X	
	2264462381000			X				X
	2264462382000				X	X		
	2264462383000				X		X	
	2264462384000				X			X

VF 00199_152

14





VFB0985

No.	Description	Type / Part No.	2S/2M	4S/2M	4S/3M
1	ECU Or Or	ES1210 ES1215 ES1216	1 1 1	1 1 1	1 - -
2	Trailer Module (alternative to 1) consisting of 1, 4, 9 Or Or	ES2001 ES2002 ES2003	1 1 1	1 1 1	1 - -
3	ABS - Single Relay Modulator Valve	BR9232	2	2	3
4	ABS - Dual Relay Modulator Valve	BR9231	1	1	1
5	Mounting bracket for Modulator	C56918	2	2	3
6	Wheel Speed Sensor	ES502.	2	4	4
7	Extension Cable Available Lengths 2 / 3 / 3,5 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 12 and 15 m	EK3003 <i>II35416..</i>	2	4	4
8	Sensor Bush	II16774	2	4	4
9	Modulator Cable Available Lengths 0,5 / 2 / 3 / 3,5 / 4 / 5 / 6 / 7 / 8 / 10 / 12 and 15 m	EK3013 <i>II35417..</i>	2	2	3
10	ISO 1185 Power Cable for ECU ES1215 (1) or Trailer Module ES2002 (2) Note. Connection cable for socket "RET/VT" for ECU ES1210 - ES1216 (1) or Trailer Module ES2001 - ES2003 (2) Available Lengths 3 / 4 / 5 / 8 and 12 m	EK3040	1	1	1
11	ISO 7638 Power Cable With Plug for drawbar and centre axle trailer Available Lengths 6 / 8 / 9 / 10 / 12 and 23 m	EK3022 <i>II35415..</i>	1	1	1
12	ISO 7638 Power Cable With Plug for semi-trailer Available Lengths 8 / 9 / 10 / 12 / 13 and 15 m	EK3027 <i>II33588..</i>	1	1	1
13	Power Supply Cable With Plug for drawbar and centre axle trailer Available Lengths 6 / 8 / 9 / 10 / 12 and 15 m	EK3023 <i>II36397..</i>	1	1	1
14	Power Supply Cable With Plug for semi-trailer Available Lengths 8 / 9 / 10 / 12 and 14 m	EK3028 <i>II36387..</i>	1	1	1
15	Power Supply Cable Length 0,5 m	EK3029 <i>II36388500</i>	1	1	1
16	Parking Socket for drawbar and centre axle trailer	I88007	1	1	1
17	Mounting bracket for Modulator BR9232	B86617	1	1	1
18	Closure Cap (only as spare part)	II36744	X	X	X
19	Closure Cap Diagnostic (only as spare part)	II36386	X	X	X




<div>1</div> <div></div> <div>GrF0537</div>	<div>2</div> <div></div> <div>GrF0533</div>	
<div>3</div> <div></div> <div>GrF0536</div>	<div>4</div> <div></div> <div>GrF0535</div>	<div>5</div> <div></div> <div>VF00202_09</div>
<div>6</div> <div></div> <div>GrF 0299</div>	<div>7</div> <div></div> <div>VF 00199_31</div>	<div>8</div> <div></div> <div>GrF 0323</div>
<div>9</div> <div></div> <div>VF 00199_30</div>		
<div>10</div> <div></div> <div>VF 00199_38</div>	<div>11</div> <div></div> <div>VF 00199_33</div>	<div>12</div> <div></div> <div>VF 00199_37</div>
<div>13</div> <div></div> <div>VF 00199_34</div>	<div>14</div> <div></div> <div>VF 00199_48</div>	<div>15</div> <div></div> <div>VF 00199_49</div>
<div>16</div> <div></div> <div>GrF0322</div>	<div>17</div> <div></div> <div>VF00202_08</div>	
<div>18</div> <div></div> <div>VF00199_153</div>	<div>19</div> <div></div> <div>VF00199_154</div>	

Description	Type / Part No.	
Diagnostic Cable (suitable for assembly onto the chassis) Available Lengths 1 / 3 / 4 / 5 and 8 m	EK3050 II35418...	 VF 00199_50
Blinkcode Adapter (connects to cable EK 3050) EZ1022	EZ1022 II36381	 VFB 0985
Adapter Cable EZ1020 (connects to a Laptop or PC) Length 3 m	EZ1020 II354343000	 VF 00199_155
Diskette (with PC-Diagnostic Software)	II36390	 VF00199_156
Diagnostic Set consists of items 1 to 4	EZ1025	

32.4 ABS Trailer Module

Key:

- Preferred Product

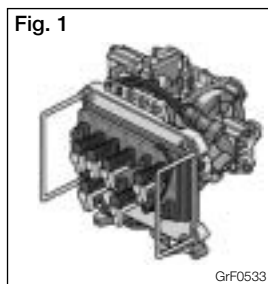




Part Number	Type No.	Fig.	Comment	
II36383	ES2001	1	2S/2M - 4S/2M - 4S/3M	
II36384	ES2002	1	2S/2M - 4S/2M	
II36385	ES2003	1	2S/2M	

33. EBS Components

Key: A Connectors for Wheel Speed Sensor
B CAN + U_{Mo}+BVS
C CAN + U_{Mo}+BVS+ALB1/2

CAN = Controller Area Network
U_{Mo} = Power supply from central EBS ECU
ALB1/2 = Signal input e.g. lining wear

BVS = Signal input
e.g. lining wear
• Preferred Product



33.1 EBS One Channel Modules

Part Number	Type No.	Fig.	Port sizes		Application	Max. Pressure [bar]		Electrical Connections		
			Supply/Delivery	Control		Supply	Delivery	Type	A	B
0486203001000	-	1	M22x1,5	M16x1,5	Scania EBS2.0	12.5	10	Deutsch	DFA/B	4 Pins
0486203023000	-	1	M22x1,5	M16x1,5	MAN EBS2.2/2.3	12.5	10	G & H	DFA/B	4 Pins
0486203024000	-		M22x1,5	M16x1,5	Volvo EBS2.2/2.3	12.5	10	G & H	DFA/B	4 Pins
0486203026000	-	1	M22x1,5	M16x1,5	Scania EBS2.1/2.2	12.5	10	Deutsch	DFA/B	4 Pins
0486203031000	-	1	M22x1,5	M16x1,5	RVI EBS2.1/2.2	12.5	10	Deutsch	DFA/B	4 Pins

33.2 EBS Two Channel Modules

0486204017000	-	2	M22x1,5	M16x1,5	MAN EBS2.2/2.3	12.5	10	G & H	DFA/B/C/D	4 Pins
0486204018000	-		M22x1,5	M16x1,5	Volvo EBS2.2/2.3	12.5	10	G & H	DFA/B/C/D	4 Pins
0486204020000	-	2	M22x1,5	M16x1,5	Scania EBS2.2	12.5	10	Deutsch	DFA/B/C/D	4 Pins
0486204023000	-	2	M22x1,5	M16x1,5	RVI EBS2.2	12.5	10	Deutsch	DFA/B/C/D	4 Pins

33.3 EBS Foot Brake Modules

Part Number	Type No.	Fig.	Port sizes		Application	Max. Pressure [bar]		Electrical Connections		Voltage	Actuation
			Supply/Delivery	Control		Supply	Delivery	Type	Pins		
0486200005000	-		M12x1,5	-	Volvo FH/FM EBS2	10.0	-	G & H	4	5	Rod
0486200007000	-		Voss NG8	-	MAN TG-A EBS2	12.5	-	G & H	4	5	Rod
0486200009000	-		Ø 12 H9	-	Scania P4 EBS2	11.0	-	Deutsch	4	5	Rod
0486200011000	-		Voss NG8	-	MAN Bus EBS2	12.5	-	G & H	4	5	Rod
0486200103000	-		Ø 12.05	-	RVI-Magnum EBS2	13.0	-	Deutsch	4	5	Rod
0486200105000	-		Ø 12.05	-	RVI-Premium EBS2	13.0	-	Deutsch	4	5	Rod
0486200203000	-		M12x1,5	-	Volvo Bus EBS2	10.0	-	G & H	4	5	Pedal
II37181	MB9000		Voss NG232	-	DC Atego EBS4	13.0	-	DIN 72585-A1	8	8 - 32	Rod

33.4 EBS Trailer Control Modules

Part Number	Type No.	Fig.	Port sizes		Application	Max. Pressure [bar]		Electrical Connections	
			Supply/Delivery	Control		Supply	Delivery	Type	Code
0486205020000	-	5	M22x1,5	M16x1,5	Scania EBS2; MAN EBS2	8.5	-	DIN72585-A1	4 Pins
0486205022000	-	5	M22x1,5	M16x1,5	Volvo EBS2; RVI EBS2	8.5	-	DIN72585-A1	4 Pins

33.5 EBS Trailer Modules

Part Number	Type No.	Fig.	Port Sizes	
			Supply	Others
II36419	ES2050	3	M22x1,5	M16x1,5
II39798	ES2050	3	M22x1,5	M16x1,5
II39782	ES2053	4	M22x1,5	M16x1,5


34. Brake Chambers



34.1 Brake Chambers (S Cam) - Diaphragm

Key:

- A Stroke
- B Push rod length (to yoke pin centre if fitted)
- C Push rod thread or Yoke (Y)
- D Push rod thread length
- Preferred Product

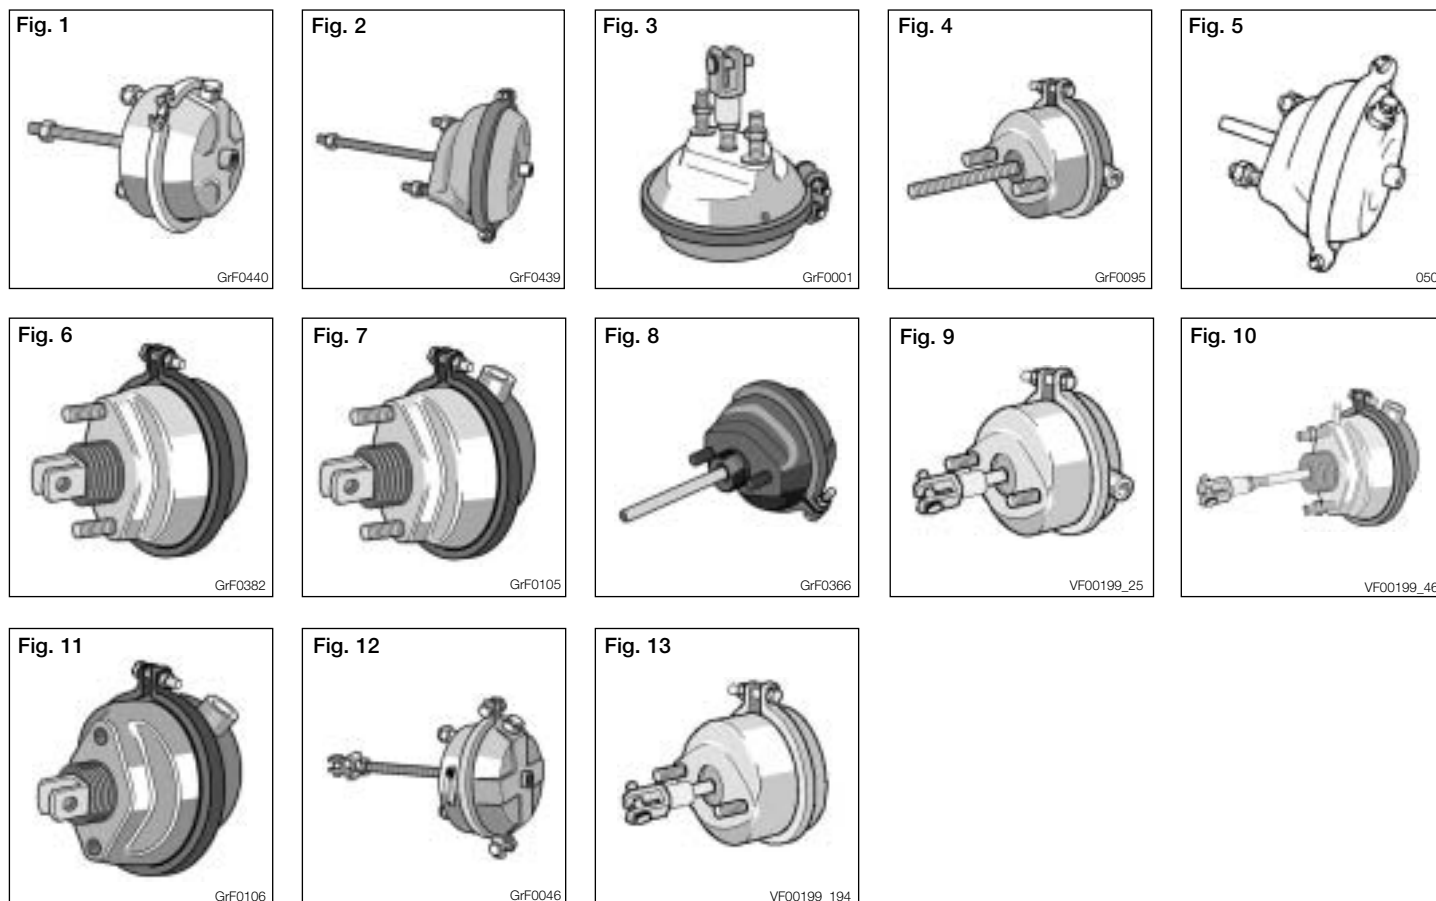

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	C	D [mm]	Comment/Key
1186699-01	-	1	M16x1,5	16	64	251	M16x1,5	251	
1186700-01	-	1	M16x1,5	20	64	250	M16x1,5	250	
1186701-01	-	1	M16x1,5	24	64	251	M16x1,5	251	
1186702-01	-	1	M16x1,5	30	64	251	M16x1,5	251	
1186883-08	-	1	M16x1,5	20	64	100	M16x1,5	50	
1188781-01	-	1	3/8" NPTF	20	57	245	5/8" UNF	250	
1188782-01	-	1	3/8" NPTF	24	57	245	5/8" UNF	250	
1188783-01	-	1	3/8" NPTF	30	64	253	5/8" UNF	250	
1189079-01	-	1	M16x1,5	16	57	232	M16x1,5	250	
1189229-01	-		M16x1,5	30	64	243	M16x1,5	250	
1189435	-	1	M16x1,5	16	70	97	M16x1,5	50	
1189470	-	1	M16x1,5	14	75	97	M14x1,5	50	
1194370	-		1/4" NPTF	9	44,5	151,6	M14x1,5	150	
1251616000	-		M16x1,5	16	75	190	M16x1,5	180	
1251618000	-		M16x1,5	16	75	92	Y		
1251624000	-		M16x1,5	16	75	70	Y		
1252016000	-		M16x1,5	20	75	190	M16x1,5	180	
1252021000	-		M16x1,5	20	75	70	Y		

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	C	D [mm]	Comment/Key
1252031000	-		M16x1,5	20	75	70	Y		
1252405000	-		M16x1,5	24	57	245	M16x1,5	206	
1252416000	-		M16x1,5	24	75	190	M16x1,5	180	
1252417000	-		M16x1,5	24	75	190	M16x1,5	180	
1252423000	-		M16x1,5	24	75	70	Y		
1252433000	-		M16x1,5	24	75	70	Y		
1252434000	-		M16x1,5	24	75	300	Y		
269734	-		M18 & 1/4"	9	57	243	1/2" UNF	250	
271650	-	2	1/4" NPTF	9	57	246	1/2" UNF	250	
274420	-	2	1/4" NPTF	12	57	246	1/2" UNF	254	
274421	-	2	1/4" NPTF	16	57	229	1/2" UNF	254	
274422	-	2	1/4" NPTF	20	57	246	5/8" UNF	250	
274423	-	2	1/4" NPTF	24	57	246	5/8" UNF	250	
274424	-	2	1/4" NPTF	30	57	254	5/8" UNF	250	
274425	-	2	1/4" NPTF	36	57	229	5/8" UNF	254	
295530	-	2	M16x1,5	12	57	200	M14x1,5	200	
295531	-	2	M22x1,5	16	57	200	M14x1,5	200	
295532	-	2	M22x1,5	20	57	200	M16x1,5	200	
295533	-	2	M22x1,5	24	57	200	M16x1,5	200	
295534	-	2	M22x1,5	30	64	200	M16x1,5	200	
295535	-	2	M22x1,5	36	76	200	M16x1,5	200	
295554	-	2	M16x1,5	20	57	200	M16x1,5	200	
295555	-	2	M16x1,5	24	57	200	M16x1,5	200	
295556	-	2	M16x1,5	30	57	200	M16x1,5	200	
30010011-4	-								
30010020-4	-								
30010027-4	-								
30010032	-								
30010033	-								
30010034	-								
30010035	-								
30010039	-								
30010077/A	-								
30010077/R	-								
30010080	-								
30010081	-								
30010087	-								
30020230	-								
30024284	-								
30024286	-								
30030384	-								
9480212130	-								
SEB01042	BX3403		M16x1,5	20	75	190	M16x1,5	190	
II31918	BX3413	1	M16x1,5	20	57	70	Y		
II33458	BX3416		M16x1,5	20	75	190	M16x1,5	190	
II33479	BX3417		M16x1,5	20	75	190	M16x1,5	180	
II33480	BX3418		M16x1,5	20	75	190	M16x1,5	180	
II33782	BX3419		M16x1,5	20	75	190	M16x1,5	180	
SEB00992	BX3515	3	M16x1,5	24	75	190	Y		
SEB01334	BX3526		M16x1,5	24	75	190	M16x1,5	190	

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	C	D [mm]	Comment/Key
<i>II31232</i>	BX3528								
<i>II31919</i>	BX3531		M16x1,5	24	57	70	Y		
<i>II31920</i>	BX3532		M16x1,5	24	57	70	Y		
<i>II33441</i>	BX3534		M16x1,5	24	75	190	M16x1,5	180	
<i>II33442</i>	BX3535		M16x1,5	24	75	190	M16x1,5	180	
<i>II33484</i>	BX3537		M16x1,5	24	75	190	M16x1,5	180	
<i>II33485</i>	BX3538		M16x1,5	24	75	190	M16x1,5	180	
<i>II33783</i>	BX3538		M16x1,5	24	75	190	M16x1,5	180	
<i>II33486</i>	BX3539		M16x1,5	24	75	37	Y		
<i>II34855</i>	BX3541	4	M16x1,5	24	75	137	M16x1,5	137	
<i>II37508</i>	BX3550	3	M16x1,5	27	75	70	Y		
<i>Y002809</i>	BX3555	13	M16x1,5	24	75	115	Y		
<i>Y002810</i>	BX3556	9	M16x1,5	24	75	115	Y		
<i>II31406</i>	BX3602		M16x1,5	30	75	190	M16x1,5	180	
<i>II33444</i>	BX3604		M16x1,5	30	75	190	M16x1,5	180	
<i>II33445</i>	BX3605		M16x1,5	30	75	190	M16x1,5	180	
<i>II33487</i>	BX3606		M16x1,5	30	75	190	M16x1,5	180	
<i>II33784</i>	BX3607		M16x1,5	30	75	190	M16x1,5	180	
<i>II33489</i>	BX3608		M16x1,5	30	64	37	Y		
<i>II19744</i>	BZ3258	5	M16x1,5	12	45	150	Ø 4mm	26	
<i>II39906F</i>	BZ3259		M16x1,5	12	75	190	M16x1,5	180	
<i>II39908F</i>	BZ3261		M16x1,5	12	75	190	M16x1,5	180	
<i>II40324F</i>	BZ3263								
<i>I61423</i>	BZ3324		M16x1,5	16	57	140	M16x1,5	140	
<i>I78491</i>	BZ3332	6	M16x1,5	16	57	37	Y		
<i>I89000</i>	BZ3353	7	M16x1,5	16	57	37	Y		
<i>I93289</i>	BZ3357	8	M16x1,5	16	57	140	M16x1,5	140	
<i>I97001</i>	BZ3358	7	M16x1,5	16	57	75	Y		
<i>II31230</i>	BZ3368		M16x1,5	16	75	89	M16x1,5	89	
<i>II33198</i>	BZ3370		M16x1,5	16	75	190	M16x1,5	180	
<i>II33199</i>	BZ3371		M16x1,5	16	64	190	Y		
<i>II33455</i>	BZ3372		M16x1,5	16	75	225	1/2"x20UNF	210	
<i>II33456</i>	BZ3373		M16x1,5	16	75	190	M16x1,5	180	
<i>II33457</i>	BZ3374		M16x1,5	16	75	190	M16x1,5	180	
<i>II33781</i>	BZ3374		M16x1,5	16	75	190	M16x1,5	180	
<i>II37741</i>	BZ3377	9	M16x1,5	16	75	70	Y		
<i>K000725</i>	BZ3377	7	M16x1,5	16	75	70	Y		
<i>I61128</i>	BZ3433	7	M22x1,5	20	57	37	M14x1,5	37	
<i>I61129</i>	BZ3434	7	M22x1,5	20	57	37	M14x1,5	37	
<i>I66003</i>	BZ3438	11	M16x1,5	20	57	37	M14x1,5	37	
<i>I66004</i>	BZ3439	11	M16x1,5	20	57	37	M14x1,5	37	
<i>I75266</i>	BZ3440	7	M16x1,5	20	57	37	Y		
<i>I75267</i>	BZ3441	7	M16x1,5	20	57	37	Y		
<i>I75268</i>	BZ3442	7	M16x1,5	20	57	37	Y		
<i>I75269</i>	BZ3443	7	M16x1,5	20	57	37	Y		
<i>I75270</i>	BZ3444	11	M16x1,5	20	57	37	Y		
<i>I68143</i>	BZ3448	11	M16x1,5	20	57	37	M14x1,5	37	
<i>I68144</i>	BZ3449	11	M16x1,5	20	57	37	M14x1,5	37	
<i>I76474</i>	BZ3460	7	M22x1,5	20	57	85	M14x1,5	85	
<i>I77743</i>	BZ3464	7	M16x1,5	20	57	37	Y		

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	C	D [mm]	Comment/Key
I86003	BZ3473	7	M16x1,5	20	57	37	Y		
I87109	BZ3480	7	M16x1,5	20	57	37	Y		
I88250	BZ3481	7	M16x1,5	20	57	37	Y		
I98113	BZ3488	7	M16x1,5	20	57	75	Y		
I98818	BZ3490	7	M16x1,5	20	57	37	M14x1,5	37	
I98817	BZ3491	7	M16x1,5	20	57	37	M14x1,5	37	
I66005	BZ3537	11	M16x1,5	24	57	37	M14x1,5	37	
I66006	BZ3538	11	M16x1,5	24	57	37	M14x1,5	37	
I74159	BZ3545	11	M16x1,5	24	57	37	Y		
I77744	BZ3555	7	M16x1,5	24	57	37	Y		
I88252	BZ3573	7	M16x1,5	24	57	37	Y		
SEB00529	BZ3583	12	M16x1,5	24	57	80	M16x1,5	80	
I90962	BZ3588	7	M16x1,5	24	57	93	Y		
I98423	BZ3589	7	M16x1,5	24	57	75	Y		
I98819	BZ3590	7	M16x1,5	24	57	37	M14x1,5	37	
I98820	BZ3591	7	M16x1,5	24	57	37	M14x1,5	37	
SEB01426	BZ3593	12	M16x1,5	24	75	115	M16x1,5	115	
II31556	BZ3595		M16x1,5	24	75	115	M16x1,5	115	
SEB00953	BZ3598		M16x1,5	27	75	260	Y		
SEB00954	BZ3599		M16x1,5	27	75	300	Y		
SEB00952	-								
SEB01031	-								
SEB01307	-								

Key:

A	Piston diameter	D	Push rod thread or Yoke (Y)
B	Stroke	E	Push rod thread length
C	Push rod length (to yoke pin centre if fitted)	•	Preferred Product

Fig. 1



GrF0311

Fig. 2





GrF0490

Part Number	Type No.	Fig.	Port Size	A [mm]	B [mm]	C [mm]	D	E [mm]	Comment/Key
1051266000	-		M16x1,5	127	120	114			
1051267000	-		M16x1,5	127	120	114			
1051268000	-		M16x1,5	127	120	211	Y		
1051269000	-		M16x1,5	127	120	211	Y		
1051270000	-		M16x1,5	127	120	114			
1051271000	-		M16x1,5	127	120	114			
1051272000	-		M16x1,5	127	120	240	Y		
1051273000	-		M16x1,5	127	120	240	Y		
1051286000	-		M16x1,5	101,6	120				
1051287000	-		M16x1,5	101,6	120				
1051288000	-		M16x1,5	101,6	120	240	Y		
1051289000	-		M16x1,5	101,6	120	240	Y		
1051290000	-		M16x1,5	101,6	120	114			
1051291000	-		M16x1,5	101,6	120	114			
1051292000	-		M16x1,5	101,6	120	240	Y		
1051293000	-		M16x1,5	101,6	120	240	Y		
1051298000	-		M16x1,5	101,6	120	114			
1051299000	-		M16x1,5	101,6	120	240	Y		
1051310000	-		M16x1,5	101,6	120	240	Y		
1051311000	-		M16x1,5	101,6	120	240	Y		
1051312000	-		M16x1,5	101,6	120	180	Y		
1051313000	-								
1051319000	-		M16x1,5	114,3	100	31			
1051320000	-		M16x1,5	114,3	100	130	Y		
1051322000	-		M16x1,5	114,3	140	31			
1051323000	-		M16x1,5	114,3	140	130	Y		
1051325000	-		M16x1,5	127	120	131	Y		
1051338000	-		G3/8"J	101,6	85	31			
1051339000	-		M16x1,5	101,6	85	119,5	Y		
1051346000	-		G3/8"J	101,6	120	31			
1053222000	-		M16x1,5	101,6	120	31			
1053223000	-		M16x1,5	127	120	31			
1053227000	-		M16x1,5	127	120	31			
1053228000	-		M16x1,5	101,6	120	31			
1053233000	-		M16x1,5	101,6	140	108,5	Y		
1053234000	-		G3/8"J	101,6	140	108,5	Y		
1061261000	-		G3/8"J	127	120	260	Y		
1061261080	-		G3/8"J	127	120	200			

Part Number	Type No.	Fig.	Port Size	A [mm]	B [mm]	C [mm]	D	E [mm]	Comment/Key
1061266000	-		G3/8"J	101,6	120	263	Y		
1061266080	-		G3/8"J	101,6	120	200			
1061268000	-		G3/8"J	101,6	85	245	Y		
1061268080	-		G3/8"J	101,6	85	165			
1063208000	-		G3/8"J	101,6	120	238			
1063209000	-		G3/8"J	101,6	120	238			
340.029.001	-	1							
443612164007	-		M14x1,5	100	110	233	Y		
443612164008	-								
443612161006	-								
443612164002	-								
443612164003	-								
443612164009	-								
443612164012	-								
443612164015	-								
443612164016	-								
443612164019	-								
443612164020	-								
443612165020	-								
443612165021	-								
AC320A	-		M22x1,5	125	70	201	Y		
AC321A	-		M22x1,5	125	70	201	Y		
AC321E	-		M18x1,5	125	70	281	Y		
AC324C	-		M16x1,5	115	64	76	Y		
AC324D	-		M16x1,5	115	64	312	Y		
AC334A	-		M16x1,5	125	70	77	Y		
AC336A	-		M18x1,5	140	80	81	Y		
AC354B	-		M18x1,5	125	120	138	Y		
AC354C	-		M22x1,5	125	120	138	Y		
AC356C	-		M22x1,5	125	100	138	Y		
AC360PA	-	2	M22x1,5	100	55	115	Y		
AC361PA	-		M22x1,5	125	65	138	Y		
AC370A	-		M14x1,5	125-115	70	76	Y		
I90027	BZ1110	1	M22x1,5	65	60	23,5	Y		
I35800	BZ1200	1	M22x1,5	80	110	120	Y	120	
I35806	BZ1300	1	M22x1,5	90	140	140	Y	140	
I71352	BZ1304	1	M22x1,5	90	140	110	Y		
I35807	BZ1400	1	M22x1,5	100	140	140	Y	140	
I35810	BZ1600	1	M22x1,5	125	140	170	Y	170	
I84567	BZ1614	1	M22x1,5	125	70	175	Y	175	
I93014	BZ1615	1	M22x1,5	125	140	175	Y	175	
II30127	BZ1616	1	M22x1,5	125	170	82,5	M14x1,5	45	
I35814	BZ1700	1	M22x1,5	140	160	170	Y	170	
I35829	BZ1800	1	M22x1,5	150	160	157	Y	157	
I92494	BZ1808	1	M22x1,5	150	60	35	Y		
STK3769	-								
STK3770	-								

Key:

- A** Stroke
B Tube length (Measured to centre line of air port)
C Tube thread
 • Preferred Product



Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	C	Comment/Key
1186733-01	-	1	3/8" NPTF	9	50	186	1,75" - 12 UNF	
1189072-01	-	1	M16x1,5	9	50	186	M48x2,0	
<i>I93218</i>	BY1501	3	M16x1,5	115 ¹⁾	45	95	M48x1,5	
<i>II18766</i>	BY1502	3	M16x1,5	115 ¹⁾	45	95	1,75" - 12 UNS	
<i>I89264</i>	BY3106	2	M16x1,5	9	50	174,5	M48x1,5	
<i>I93403</i>	BY3201	2	M16x1,5	12	50	215	1,75" - 12 UNS	
<i>I81955</i>	BY3202	2	M16x1,5	12	50	174,5	M48x1,5	
<i>I92376</i>	BY3211	1	M16x1,5	12	50	167,5	1,75" - 12 UNS	
<i>I92518</i>	BY3212	1	M16x1,5	12	50	174,5	M48x1,5	
<i>II30089</i>	BY3220	2	M16x1,5	12	53	170	M48x2,0	
<i>II39596F</i>	BY3226							
<i>I86007</i>	BY3252	1	M16x1,5	14	50	173	M48x1,5	
<i>II31796</i>	BY3257							
<i>II35869</i>	BY3259							
<i>I83658</i>	BY3301	2	M16x1,5	16	50	173	M48x1,5	
<i>I86291</i>	BY3303	1	M16x1,5	16	50	215	1,75" - 12 UNS	
<i>I93320</i>	BY3309	2	M16x1,5	16	50	173	M48x1,5	
<i>II32158</i>	BY3313	1	M16x1,5	16	50	183	1,75" - 12 UNS	
<i>II38398F</i>	BY3315	2	M16x1,5	16	53	187	1,75" - 12 UNS	
<i>II39666F</i>	BY3408		M16x1,5	20	53	247	M45x1,5	
<i>II18694</i>	BY3456	1	M16x1,5	22	53	180	M48x2,0	
<i>II37731</i>	BY3509	2	M16x1,5	24	53	180	M48x2,0	
<i>K002171</i>	BY3510							
<i>I58732</i>	BZ3107	2	M16x1,5	9	44,5	402,5	1,75" - 12 UNS	
<i>I60323</i>	BZ3108	2	M16x1,5	9	44,5	364,5	1,75" - 12 UNS	
<i>I66845</i>	BZ3110	2	M16x1,5	9	44,5	186,5	1,75" - 12 UNS	
<i>I78042</i>	BZ3117	2	M16x1,5	9	44,5	214,5	1,75" - 12 UNS	
<i>I60838</i>	BZ3214	2	M16x1,5	12	44,5	186,5	1,75" - 12 UNS	
<i>I70694</i>	BZ3221	1	M16x1,5	12	44,5	186,5	1,75" - 12 UNS	
<i>I73335</i>	BZ3222	2	M16x1,5	12	44,5	348,5	1,75" - 12 UNS	
<i>I88827</i>	BZ3253	2	M16x1,5	12	45	204	1,75" - 12 UNS	
EF105AX	-	1	M16x1,5	10,5	50	215	1,75" - 12 UNF	
EF105BY	-	1	M16x1,5	10,5	53	167	M48x2,0	
EF105CX	-	1	M16x1,5	10,5	50	157	1,75" - 12 UNF	
EF105FY	-	1	M16x1,5	10,5	50	187	M48x2,0	
EF10A	-		M16x1,5	100 ¹⁾	32	161	1,75" - 12 UNF	

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	C	Comment/Key
EF120C	-	1	M16x1,5	12	50	318	1,75" - 12 UNF	
EF120D	-	1	M16x1,5	12	50	365	1,75" - 12 UNF	
EF120E	-	1	M16x1,5	12	44,5	403	1,75" - 12 UNF	
EF120F	-	1	M16x1,5	12	50	187	1,75" - 12 UNF	
EF120FY	-	1	M16x1,5	12	50	187	M48x2,0	
EF120HX	-	1	M16x1,5	12	50	215	1,75" - 12 UNF	
EF120HY	-	1	M16x1,5	12	53	215	M48x2,0	
EF120L	-	1	M16x1,5	12	50	157	1,75" - 12 UNF	
EF120N	-	1	M16x1,5	12	44,5	145	1,75" - 12 UNF	
EF120P	-	1	M16x1,5	12	50	138	M48x2,0	
EF120Y	-	1						
EF141BY	-	1	M16x1,5	14	53	167	M48x2,0	
EF141FY	-		M16x1,5	14	53	187	M48x2,0	
EF141PYX	-		M16x1,5	14	53	187	1,75" - 12 UNS	
EF161AY	-		M16x1,5	16	53	152	M48x2,0	
EF161BY	-		M16x1,5	16	53	167	M48x2,0	
EF161CY	-							
EF161DY	-							
EF161FY	-		M16x1,5	16	53	187	M48x2,0	
EF180BY	-		M16x1,5	18	53	180	M48x2,0	
EF180HY	-		M16x1,5	18	53	230	M48x2,0	
EF201BY	-		M16x1,5	20	53	180	M48x2,0	
EF201LA	-		M16x1,5	20	53	247	M48x2,0	
EF201LY	-		M16x1,5	20	53	230	M48x2,0	
EF221BY	-		M16x1,5	22	53	180	M48x2,0	
EF221LY	-		M16x1,5	22	53	230	M48x2,0	
EF241BY	-		M16x1,5	24	53	180	M48x2,0	
EF241LY	-		M16x1,5	24	53	245	M48x2,0	
EF241MY	-		M16x1,5	24	53	275	M48x2,0	
EF241QA	-		M16x1,5	24	53	268	M45x1,5	
EF8A	-		M16x1,5	80 ¹⁾	32	161	1,75" - 12 UNS	
EF90	-							
EF90AB	-	1	M16x1,5	9	50	138	1,75" - 12 UNF	
EF90AY	-	1	M16x1,5	9	50	138	M48x2,0	
EF90EX	-	1	M16x1,5	9	50	215	1,75" - 12 UNF	
EF90EY	-	1	M16x1,5	9	50	215	M48x2,0	
EF90Y	-	1						
EF90YE	-	1	M16x1,5	9	50	138	M48x2,0	
EF9A	-	1	M16x1,5	90 ¹⁾	32	161	1,75" - 12 UNS	
KY1676/10	-	1	M16x1,5	12	44,5	180	1,75" - 12 UNS	
KY1675/14	-	1	M16x1,5	9	50	82	1,75" - 12 UNS	
KY1675/9	-	1	M16x1,5	9	50	193	1,75" - 12 UNS	
KY1724/6	-	1	1/4" NPTF	9	44,5	78,7	1,75" - 12 UNS	
KY1947/1	-	1	1/4" NPTF	9	44,2	72,4	1,75" - 12 UNS	

¹⁾ Piston diameter [mm] instead of Diaphragm

Key:

- A Stroke
 B Tube length (Measured to centre line of air port)
 • Preferred Product




Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	Comment/Key
0482023408000	-	1	M22&M12x1,5	12	53	203	
0482023504000	-	1	M22&M12x1,5	14	53	200	
0482023610000	-	1	M22&M12x1,5	16	53	203	
0482023613000	-	1	M22x1,5	16	53	248	
0482023708000	-	1	M22&M12x1,5	18	53	203	
0482023806000	-	1	M22&M12x1,5	20	53	203	
0482023809000	-	1	M22x1,5	20	53	248	
0482023810000	-	1	M22x1,5	20	53	248	
0482023904000	-	1	M22&M12x1,5	22	53	203	
0482023907000	-	1	M22x1,5	22	53	256	
0482023927000	-	1	M22x1,5	24	53	203	
0482023908000	-	1	M22x1,5	22	53	256	
0482024000000	-						

Key:

- A Stroke
 B Push rod protrusion
 • Preferred Product

Fig. 1

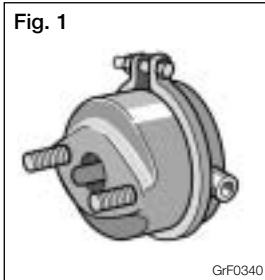

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	Comment/Key
<i>II38472F</i>	BS2500	1	M16x1,5	24	57	15	
<i>II38473F</i>	BS2501	1	M16x1,5	24	57	15	
<i>II38474F</i>	BS2502	1	M16x1,5	24	57	15	
<i>II38475F</i>	BS2503	1	M16x1,5	24	57	15	
<i>II39205F</i>	BS2504	1	M16x1,5	24	64	15	
<i>K000501</i>	BS2511		M22x1,5	24	75	15	
<i>K001027</i>	BS2514	1	M22x1,5	24	64	15	
<i>K001028</i>	BS2515	1	M22x1,5	24	64	15	
<i>K001603</i>	BS2516	1	M16x1,5	24	57	15	
<i>K001604</i>	BS2517	1	M16x1,5	24	57	15	
<i>K001633</i>	BS2518		M22x1,5	24	75	15	
<i>II36967</i>	BS3201	1	M16x1,5	12	57	15	
<i>II37861</i>	BS3202	1	M16x1,5	12	57	15	
<i>II38400F</i>	BS3204	1	M16x1,5	12	57	15	
<i>II39191F</i>	BS3205	1	M16x1,5	12	57	15	Symmetrical to BS3207
<i>II39193F</i>	BS3207	1	M16x1,5	12	57	15	Symmetrical to BS3205
<i>II32963</i>	BS3250	1	Voss NG12	14	57	15	
<i>II31782</i>	BS3251	1	M16x1,5	14	57	15	
<i>II32167</i>	BS3252	1	Voss NG12	14	57	15	
<i>II33050</i>	BS3255	1	M16x1,5	14	64	15	
<i>II36968</i>	BS3257	1	M16x1,5	14	57	15	
<i>II38455F</i>	BS3263	1	M16x1,5	14	57	15	
<i>II39196F</i>	BS3269	1	M16x1,5	14	57	15	
<i>II39214F</i>	BS3270	1	M16x1,5	14	57	15	
<i>II39215F</i>	BS3271	1	M16x1,5	14	57	15	
<i>II40349F</i>	BS3273	1	Voss NG12	14	57	15	
<i>II14535000</i>	BS3300	1	M16x1,5	16	57	15	
<i>II30614</i>	BS3301	1	Voss NG12	16	57	15	
<i>II33895</i>	BS3309	1	M16x1,5	16	64	15	
<i>II36969</i>	BS3313	1	M16x1,5	16	57	15	
<i>II37110</i>	BS3314	1	M16x1,5	16	57	15	
<i>II37140000</i>	BS3315	1	M16x1,5	16	57	15	
<i>II37315</i>	BS3316	1	M16x1,5	16	57	15	
<i>II37316</i>	BS3317	1	M16x1,5	16	57	15	
<i>II37863</i>	BS3318	1	M16x1,5	16	57	15	
<i>II38105F</i>	BS3320	1	M16x1,5	16	57	15	



Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	Comment/Key
II38111F	BS3321	1	M16x1,5	16	57	15	
II38402F	BS3322	1	Voss NG12	16	57	15	
II38411F	BS3323	1	Voss NG12	16	57	15	
II38412F	BS3324	1	Voss NG12	16	57	15	
II38462F	BS3325	1	Voss NG12	16	57	15	
II38466F	BS3326	1	M16x1,5	16	57	15	
II38556F	BS3327	1	M16x1,5	16	57	15	
II38589F	BS3331	1	M16x1,5	16	57	15	
II39218F	BS3335	1	M22x1,5	16	57	20	
II39374F	BS3336		M22x1,5	16	75	20	
II39375F	BS3337		M22x1,5	16	75	20	
II39693F	BS3338	1	M16x1,5	16	57	15	
II39927F	BS3340	1	M16x1,5	16	64	15	
II39928F	BS3341	1	M16x1,5	16	64	15	
II40493F	BS3342		M16x1,5	16	57	15	
Y004227	BS3343		M16x1,5	16	57	15	
Y004232	BS3447		M16x1,5	20	57	15	
II15229000	BS3350	1	M16x1,5	18	57	15	
II33896	BS3352	1	M16x1,5	18	64	15	
II36778	BS3354	1	M16x1,5	18	64	15	
II37864	BS3355	1	M16x1,5	18	57	15	
II38403F	BS3357	1	M16x1,5	18	57	15	
II38527F	BS3358	1	M16x1,5	18	57	15	
II38924F	BS3361	1	M16x1,5	16	57	15	
II39199F	BS3362	1	M16x1,5	18	64	15	
II39602F	BS3363	1	M16x1,5	18	64	15	
II39603F	BS3364	1	M16x1,5	18	64	15	
II32592	BS3401	1	Voss NG12	20	64	15	
II30616	BS3402	1	M16x1,5	20	65	15	
II30617	BS3403	1	M16x1,5	20	65	15	
II31098000	BS3404	1	M16x1,5	20	57	15	
II32595	BS3409	1	Voss NG12	20	64	15	
II32169	BS3410	1	Voss NG12	20	64	15	
II32170	BS3411	1	Voss NG12	20	64	15	
II32171	BS3412	1	Voss NG12	20	64	15	
II32710	BS3415	1	M16x1,5	20	64	15	
II33897	BS3420	1	M16x1,5	20	64	15	
II36779	BS3423	1	M16x1,5	20	64	15	
II37865	BS3424	1	M16x1,5	20	57	15	
II38107F	BS3430	1	M16x1,5	20	57	15	
II38404F	BS3433	1	M16x1,5	20	57	15	
II38413F	BS3434	1	Voss NG12	20	64	15	
II38414F	BS3435	1	Voss NG12	20	64	15	
II38528F	BS3436	1	M16x1,5	20	57	15	
II38574F	BS3437	1	M16x1,5	20	57	15	
II38591F	BS3440	1	M16x1,5	20	57	15	
II39201F	BS3441	1	M16x1,5	20	64	15	
II39323F	BS3442	1	M22x1,5	20	75	20	
II39324F	BS3443	1	M22x1,5	20	75	20	
II14540	BS3450	1	M16x1,5	22	65	15	

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	Comment/Key
<i>II18850000</i>	BS3451	1	M16x1,5	22	65	15	Symmetrical to BS3452
<i>II18886</i>	BS3452	1	M16x1,5	22	65	15	Symmetrical to BS3451
<i>II31099</i>	BS3453	1	M16x1,5	22	57	15	
<i>II33898</i>	BS3455	1	M16x1,5	22	64	15	
<i>II34670</i>	BS3456	1	M16x1,5	22	57	15	
<i>II34671</i>	BS3457	1	M16x1,5	22	57	15	
<i>II36780</i>	BS3458	1	M16x1,5	22	64	15	
<i>II38529F</i>	BS3462	1	M16x1,5	22	57	15	
<i>II39203F</i>	BS3467	1	M16x1,5	22	64	15	
<i>II39578F</i>	BS3468	1	M16x1,5	22	64	15	
<i>II39579F</i>	BS3469	1	M16x1,5	22	64	15	
<i>K001214</i>	BS3471	1	M16x1,5	22	57	15	
<i>K001215</i>	BS3472	1	M16x1,5	22	57	15	
<i>II18209</i>	BS3502	1	M16x1,5	24	65	15	
<i>II18210</i>	BS3503	1	M16x1,5	24	65	15	
<i>II18950</i>	BS3505	1	M16x1,5	24	65	15	
<i>II18951</i>	BS3506	1	M16x1,5	24	65	15	
<i>II30618000</i>	BS3509	1	M16x1,5	24	57	15	
<i>II32597</i>	BS3514	1	Voss NG12	24	64	15	
<i>II32598</i>	BS3515	1	Voss NG12	24	64	15	
<i>II32599</i>	BS3516	1	Voss NG12	24	64	15	
<i>II31651</i>	BS3517	1	M16x1,5	24	57	15	
<i>II31652</i>	BS3518	1	M16x1,5	24	57	15	
<i>II32164</i>	BS3520	1	M16x1,5	24	57	15	
<i>II32165</i>	BS3521	1	M16x1,5	24	57	15	
<i>II32172</i>	BS3522	1	Voss NG12	24	64	15	
<i>II32593</i>	BS3524	1	Voss NG12	24	64	15	
<i>II32723</i>	BS3526	1	M22x1,5	24	75	26	
<i>II33899</i>	BS3527	1	M16x1,5	24	64	15	
<i>II33903</i>	BS3528	1	M22x1,5	24	75	26	
<i>II36781</i>	BS3532	1	M16x1,5	24	64	15	
<i>II37133</i>	BS3536	1	M22x1,5	24	75	20	
<i>II37134</i>	BS3537	1	M22x1,5	24	75	20	
<i>II37127</i>	BS3538	1	M16x1,5	24	64	15	
<i>II38530F</i>	BS3547	1	M16x1,5	24	57	15	
<i>II31100</i>	BS3551	1	M16x1,5	27	57	15	
<i>K002113</i>	BS3569	1	M16x1,5	27	64	15	
<i>K002162</i>	BS3570	1	M16x1,5	27	64	15	
<i>II31101</i>	BS3601	1	M16x1,5	30	57	15	
<i>II34021</i>	BS3602	1	Voss NG12	30	64	15	
<i>II34211</i>	BS3603	1	Voss NG12	30	64	15	
<i>II34850</i>	BS3604	1	Voss NG12	30	64	15	
<i>II34851</i>	BS3605	1	Voss NG12	30	64	15	
<i>II37143</i>	BS3606	1	Voss NG12	30	64	15	
<i>II37144</i>	BS3607	1	Voss NG12	30	64	15	
II39281F	-						
II39918F	-						
II39964F	-						
II39965F	-						
II40307F	-						

Part Number	Type No.	Fig.	Port Size	Type Size	A [mm]	B [mm]	Comment/Key
K000575	-						
SK2973/1	-	1	M16x1,5	18	75	-	
SK2973/2	-	1	M16x1,5	20	75	-	
SK2973/3	-	1	M16x1,5	22	75	-	
SK2973/4	-	1	M16x1,5	24	75	-	
SK2973/5	-	1	M16x1,5	27	75	-	
TK6337	-						
TK6338	-						
TK6353	-						
TK6354	-						


Key:



- MC** Complete with Master Cylinder
SS Stroke switch fitted
• Preferred Product



Part Number	Type No.	Fig.	Port Size	Piston dia.	Stroke [mm]	Comment/Key	
0482201001000	-	1	M16x1,5	130	75		
0482201002000	-	2	M16x1,5	165	75		
1071288000	-		M16x1,5	175	52	SS	
1071298000	-		M16x1,5	150	52	SS	
AC656A	-		M14x1,5	180	45		
AC656AX	-		M14x1,5	190	45	SS,MC	
AC656BA	-		M14x1,5	180	45		
AC656C	-		M14x1,5	180	45		
AC656D	-		M22x1,5	180	60	SS	
AC657AA	-		M14x1,5	190	45	SS	
AC657C	-		M14x1,5	190	45	SS,MC	
AC657CX	-		M14x1,5	190	45	SS	
AC658CB	-		M16x1,5	205	45	SS	
AC659AA	-		M22x1,5	140	75		
I69652	BZ4150		M22x1,5	65	30		
I48198	BZ4204	3	M22x1,5	140	75		
SEB00003	BZ4212	3	M22x1,5	140	140	MC	
I29358	BZ4304	3	M22x1,5	150	60		
I39961	BZ4307	3	M22x1,5	150	75		
I48028	BZ4314	3	M22x1,5	150	75		
I50858	BZ4316	4	M22x1,5	150	36		
I68201	BZ4320	4	M22x1,5	150	75		
I71199	BZ4321	4	M22x1,5	150	75	SS,MC	
I69395	BZ4402	4	M22x1,5	175	75		
I71427	BZ4600	4	M22x1,5	225	90		

Key:

- MC Complete with Master Cylinder
 SS Stroke switch fitted
 • Preferred Product






Part Number	Type No.	Fig.	Port Size	Type Size	Stroke [mm]	Comment/Key	
1186584	-		1/4" NPTF	36	57		
<i>I75419</i>	BZ3549	1	M16x1,5	24	75		
<i>I76259</i>	BZ3552	1	M16x1,5	24	75		
<i>I76260</i>	BZ3645	1	M16x1,5	30	75		
<i>I76261</i>	BZ3713	1	M16x1,5	36	75		
<i>I88090</i>	BZ5407	1	M14x1,5	20	50		
<i>I88091</i>	BZ5408	1	M14x1,5	20	50		
<i>I88263</i>	BZ5410	1	M16x1,5	20	75		
<i>I88325</i>	BZ5411	1	M16x1,5	20	75		
<i>I88092</i>	BZ5507	1	M14x1,5	24	50		
EF620A	-	2	M16x1,5	20	50		
EF620AY	-	2	M16x1,5	20	50	MC	
EF620D	-	2	M16x1,5	20	50		
EF624A	-	2	M16x1,5	24	50		
EF624AK	-	2	M16x1,5	24	50	MC	
EF624AX	-	2	M16x1,5	24	50	SS,MC	
EF624AY	-	2	M16x1,5	24	50	MC	
EF624BY	-	2	M16x1,5	24	50	MC	
EF624D	-	2	M16x1,5	24	50		
EF624DY	-	2	M16x1,5	24	50	MC	
EF630A	-	2	M16x1,5	30	50		
KY2481/1	-	2	1/4" NPTF	24	60		

35. Spring Brakes

35.1 Spring Brakes (S Cam) - Diaphragm/Piston

Key:		D	Push rod thread or Yoke (Y)
A	Spring Portion Force at zero stroke	E	Push rod thread length
B	Stroke (stroke of service portion/stroke of spring portion)	•	Preferred Product
C	Push rod length (to yoke pin centre if fitted)		



Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	E [mm]	Comment/Key
SEB00873	BX7502	1	M16x1,5	24/30	86	75/75	190	M16x1,5	180	
II37141	BX7528	2	M16x1,5	24/30	90	75/75	155	M16x1,5	155	
II37274	BX9400	3	Voss NG12	20/24	102	57/57	300	M16x1,5	300	
II37275	BX9401	3	Voss NG12	20/24HF	105,7	57/57	300	M16x1,5	300	
II37276	BX9402	3	Voss NG12	20/30	131	57/57	300	M16x1,5	300	
II39689F	BX9425	4	M16x1,5	24/24	102	57/57	90	Y	-	
II40491F	BX9425	4	M16x1,5	24/24	102	57/57	90	Y	-	
II39690F	BX9426									
II34029	BX9509	5	M16x1,5	24/24	109,7	64/64	200	M16x1,5	200	
II37277	BX9519	3	Voss NG12	24/24	102	57/57	300	M16x1,5	300	
II37278	BX9520	3	Voss NG12	24/24HF	105,7	57/57	300	M16x1,5	300	
II37279	BX9521	3	Voss NG12	24/30	131	57/57	300	M16x1,5	300	
II38074F	BX9533	6	M16x1,5	24/24HF	117	57/57	310	Y	-	
II38421F	BX9534	6	M16x1,5	24/24HF	117	57/57	310	Y	-	
31162420	BZ1624	7	M16x1,5	16/24	110	57/67	187	Y	-	
K001369	BZ1624	7	M16x1,5	16/24	110	57/67	187	Y	-	
K001368	BZ2030	7	M16x1,5	20/30	130	57/67	290	Y	-	
31242450	BZ2424									


Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	E [mm]	Comment/Key
I73649	BZ7311	8	M16x1,5	16/24	103,5	57/67	187	Y	-	
I74214	BZ7312	8	M16x1,5	16/24	103,5	57/67	260	Y	-	
I74215	BZ7313	8	M16x1,5	16/24	103,5	57/67	290	Y	-	
I74217	BZ7315	8	M16x1,5	16/24	103,5	57/67	270	Y	-	
I74252	BZ7316	8	M16x1,5	16/24	103,5	57/67	270	Y	-	
I80260	BZ7324	8	M16x1,5	16/24	103,5	57/57	187	Y	-	
I80264	BZ7328	8	M16x1,5	16/24	103,5	57/57	30	Y	-	
II19279	BZ7419	8	M16x1,5	20/30	130	57/57	30	Y	-	
II14006	BZ7447	8	M16x1,5	20	45,8	57/57	37	Y	-	
II14007	BZ7448	8	M16x1,5	20	45,8	57/57	37	Y	-	
I92062	BZ7453	8	M16x1,5	20/24HF	118	64/64	200	Y	-	
I63819	BZ7519	8	M22x1,5	24	116	57/57	280	Y	-	
I98981	BZ7536	8	M16x1,5	24/24	109,7	57/67	86	Y	-	
I80269	BZ7540	8	M16x1,5	24/24	103,5	57/57	187	Y	-	
I80582	BZ7541	8	M16x1,5	24	95	57/57	240	Y	-	
I82242	BZ7543	8	M16x1,5	24	95	57/57	60	Y	-	
I87520	BZ7559	8	M16x1,5	24/24	109,7	57/67	270	Y	-	
II14008	BZ7564	8	M16x1,5	24	45,8	57/57	37	Y	-	
II14009	BZ7567	8	M16x1,5	24	45,8	57/57	37	Y	-	
I92695	BZ7575	8	M16x1,5	24/24HF	118	64/64	200	Y	-	
II34867	BZ7581	8	M16x1,5	27/30	139,2	57/57	86	Y	-	
II34868	BZ7582	8	M16x1,5	27/30	139,2	57/57	86	Y	-	
II18960	BZ9309	9	M16x1,5	16/24	109,7	57/57	58	Y	-	
II33453	BZ9318		M16x1,5	16/24	110	57/57	60	Y	-	
II33454	BZ9319		M16x1,5	16/24	110	57/57	60	Y	-	
II37272	BZ9324	3	Voss NG12	16/24	102	57/57	300	M16x1,5	300	
II37273	BZ9325		Voss NG12	16/24HF	105	57/57	300	M16x1,5	300	
II38133F	BZ9331	6	M16x1,5	16/24	110	57/57	70	Y	-	
II16854000	BZ9404	4	M16x1,5	20/24	105	57/57	300	Y	-	
II16855000	BZ9405	4	M16x1,5	20/24	105	57/57	86	Y	-	
II18961	BZ9412	5	M16x1,5	20/24	109,7	57/57	58	Y	-	
II19342000	BZ9417	4	M16x1,5	20/24	110	57/57	260	Y	-	
II32006	BZ9424	9	Voss NG12	20/24HF	118	57/57	58	Y	-	
II14560000	BZ9425	9	Voss NG12	20/30	130	57/57	37	Y	-	
II33675000	BZ9447	4	M16x1,5	20/24	110	57/57	70	Y	-	
II17479	BZ9506		M16x1,5	24/24HF	118	64/64	265	Y	-	
II17480	BZ9507	9	M16x1,5	24/24HF	118	64/64	265	Y	-	
II30475	BZ9523	4	M16x1,5	24/24	109,7	57/57	64	Y	-	
II32005	BZ9524	6	Voss NG12	24/24HF	118	57/57	58	Y	-	
II18971	BZ9553	4	M16x1,5	27/24	102	64/64	70	Y	-	
II18972	BZ9554	4	M16x1,5	27/24	102	64/64	86	Y	-	
II34004	BZ9558									
II37098	BZ9559	5	Voss NG12	27/30	130	64/64	300	M16x1,5	300	
II40321F	BZ9566		Voss NG12	27/30	130	64/64	300	M16x1,5	265	
K001256	BZ9568	4	M16x1,5	27/30	130	64/64	300	Y	-	
II37280	BZ9614	3	Voss NG12	30/24HF	105,7	57/57	300	M16x1,5	300	
II39347F	BZ9624									
II37281	BZ9657	3	Voss NG12	30/30	131	64/64	300	M16x1,5	300	
K001255	BZ9661	4	M16x1,5	30/30	130	64/64	300	Y	-	
K2B0501XU	-	10	M16x1,5	16	62	64/64	250	M16x1,5	250	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	E [mm]	Comment/Key
K2B0502XU	-	10	M16x1,5	16	80	64/64	251	M16x1,5	250	
K2B0503XU	-	10	M16x1,5	20	62	64/64	250	M16x1,5	250	
K2B0504XU	-	10	M16x1,5	20	80	64/64	251	M16x1,5	250	
K2B0506XU	-	10	M16x1,5	24	80	64/64	250	M16x1,5	250	
K2B0512XU	-	10	M16x1,5	24	80	64/64	250	M16x1,5	250	
K2B0513XU	-	10	M16x1,5	24	98	64/64	250	M16x1,5	250	
K2B0514XU	-	10	M16x1,5	24	105	64/64	250	M16x1,5	250	
K2B0518	-	10	M16x1,5	27	105	64/64	250	M16x1,5	250	
K2B0520XU	-	10	M16x1,5	30	80	64/64	251	M16x1,5	250	
K2B0521XU	-	10	M16x1,5	30	98	64/64	251	M16x1,5	250	
K2B0522XU	-	10	M16x1,5	30	105	64/64	251	M16x1,5	250	
K2B0525XUA	-	10	3/8" NPTF	20	62	64/64	250	5/8" UNF	250	
K2B0526XUA	-	10	3/8" NPTF	20	80	64/64	250	5/8" UNF	250	
K2B0527XUA	-	10	3/8" NPTF	24	62	64/64	250	5/8" UNF	250	
K2B0528XUA	-	10	3/8" NPTF	24	80	64/64	250	5/8" UNF	250	
K2B0535XUA	-	10	3/8" NPTF	24	98	64/64	250	5/8" UNF	250	
K2B0542XUA	-	10	3/8" NPTF	30	80	64/64	250	5/8" UNF	250	
K2B0543XUA	-	10	3/8" NPTF	30	98	64/64	251	5/8" UNF	250	
K2B0550XU	-	10	M16x1,5	24	80	64/64	200	M14x1,5	200	
K2B1101XU	-	10	M16x1,5	30	98	64/64	40	5/8" UNF	50	
K2B1125XU	-	10	3/8" NPTF	30	80	64/64	60	5/8" UNF	50	
K2B1154XU	-	10	1/4" NPTF	30	80	64/64	60	5/8" UNF	60	
K2B1222XU	-	10	M16x1,5	30	98	64/64	71	M16x1,5	50	
K2C0501XU	-	10	M16x1,5	16	62	57/57	182	M14x1,5	200	
K2C0527XUA	-	10	3/8" NPTF	24	62	57/57	250	5/8" UNF	250	
K2C0611XU	-	10	M16x1,5	36	98	73/73	197	M16x1,5	250	
K2C0612	-	10	M16x1,5	36	105	73/73	197	M16x1,5	250	
K2C2002XU	-	10	3/8" NPTF	30	80	57/57	66	5/8" UNF	66	
K2C2004XU	-	10	3/8" NPTF	30	80	57/57	168	5/8" UNF	135	
K2C2020XUB	-	10	M16x1,5	30	98	64/64	256	5/8" UNF	250	
K2C2023XUB	-	10	M16x1,5	36	98	73/73	255	5/8" UNF	254	
K2D0706	-	10	M16x1,5	24	80	64/64	243	M16x1,5	250	
K2D0710	-	10	M16x1,5	20	105	64/64	243	M16x1,5	250	
K2D0714	-	10	M16x1,5	24	105	64/64	243	M16x1,5	250	
K2D0722XU	-	10	M16x1,5	30	105	64/64	243	M16x1,5	250	
K2G0822XU	-	10	M16x1,5	30	105	64/64	243,9	M16x1,5	244	
KZ758/1A	-	11	M16x1,5	30	98	57/57	38	5/8" UNF	50	
KZ778/2	-	11	1/4" NPTF	20	80	57/57	254	5/8" UNF	254	
KZ804/2	-	11	M16x1,5	20	80	57/57	200	M16x1,5	200	
KZ805/2	-	11	M16x1,5	24	80	57/57	200	M16x1,5	200	
KZ806/2	-	11	M16x1,5	30	98	57/57	200	M16x1,5	200	

Key:

B Base mounted
F Flange mounted



A Spring Portion Force at zero stroke
B Stroke (stroke of service portion/stroke of spring portion)
C Push rod length (to yoke pin centre if fitted)
 • Preferred Product



Part Number	Type No.	Fig.	Port Sizes	Piston Dia.	A x100[N]	B [mm]	C [mm]	Comment/Key	
I48016	BZ6405	1	M16x1,5	100/110	60	100/110	250	B	
I50156	BZ6413	2	M16x1,5	115/150	77	57/63	300	F	
I78399	BZ6417	1	M16x1,5	115/150	77	90/90	170	F	
I66031	BZ6420	1	M16x1,5	100/150	77	90/90	170	F	
I76463	BZ6425	1	M16x1,5	100/150	77	90/90	170	F	
I82454	BZ6427	1	M16x1,5	100/150	80	80/80	170	F	
I54743	BZ6507	1	M16x1,5	115/150	81	80/80	170	F	
I63476	BZ6515	1	M16x1,5	115/150	82	90/90	170	B	
I66032	BZ6517	1	M16x1,5	115/150	82	90/90	170	F	
I66033	BZ6621	1	M16x1,5	125/150	82	90/90	170	F	

Key:

- A** Stroke (stroke of service portion/stroke of spring portion)
B Push rod length (to yoke pin centre if fitted)
C Push rod thread or Yoke (Y)
D Push rod thread length
• Preferred Product




Part Number	Type No.	Fig.	Port Sizes	Type Size	A [mm]	B [mm]	C	D [mm]	Comment/Key
2024GCMSS	BX7401	1	M16x1,5	20/24	57/57	241	M16x1,5	241	
2024GCSS	-	1	3/8" NPTF	20/24	57/57	241	5/8" UNF	241	
2424GCLS	-	1	3/8" NPTF	24/24	64/64	241	5/8" UNF	250	
2424GCMLS	BX7516	1	M16x1,5	24/24	64/64	241	M16x1,5	250	
2430GCLS	-	1	3/8" NPTF	24/30	64/64	241	5/8" UNF	250	
2430GCMEXLS	BX7515	1	M16x1,5	24/30	75/75	241	M16x1,5	250	
2430GCMLS	BX7514	1	M16x1,5	24/30	64/64	241	M16x1,5	250	
3030GCLS	-	1	3/8" NPTF	30/30	64/64	241	5/8" UNF	250	
3030GCMLS	BX7611	1	M16x1,5	30/30	64/64	241	M16x1,5	250	
SEB01269	BX7401	2	M16x1,5	20/24	57/57	285	Y	285	
SEB01395	BX7402	2	M16x1,5	20/24	57/57	227	Y	227	
II36948	BX7406	2	M16x1,5	20/30	76/76	250	Y	250	
II36950	BX7408	2	M16x1,5	20/30	57/57	227	Y	227	
II36951	BX7409	2	M16x1,5	20/30	57/57	227	Y	227	
SEB01267	BX7514	2	M16x1,5	24/30	57/57	250	Y	250	
SEB01288	BX7516	2	M16x1,5	24/24	57/57	280	Y	280	
SEB01396	BX7518	2	M16x1,5	24/30	57/57	227	Y	227	
II36339	BX7521	2	M16x1,5	24/30	64/64	250	Y	250	
II36944	BX7523	2	M16x1,5	24/30	57/57	250	Y	250	
II36945	BX7524	2	M16x1,5	24/30	76/76	250	Y	250	
II36946	BX7525	2	M16x1,5	24/30	57/57	227	Y	227	
II36947	BX7526	2	M16x1,5	24/30	76/76	227	Y	227	
II36973	BX7527	2	M16x1,5	24/30	76/76	250	Y	250	
SEB01270	BX7611	2	M16x1,5	30/30	57/57	280	Y	280	
SEB01398	BX7612	2	M16x1,5	30/30	57/57	227	Y	227	


Key:

- A** Spring Portion Force at zero stroke
- B** Stroke (stroke of service portion/stroke of spring portion)
- C** Tube length (Measured to c/l of air port)
- D** Tube thread (See code below)

- T1** Tube thread 1,75" - 12 UNS
- T2** Tube thread M45x1,5
- T3** Tube thread M48x1,5
- T4** Tube thread M48x2,0
- Preferred Product

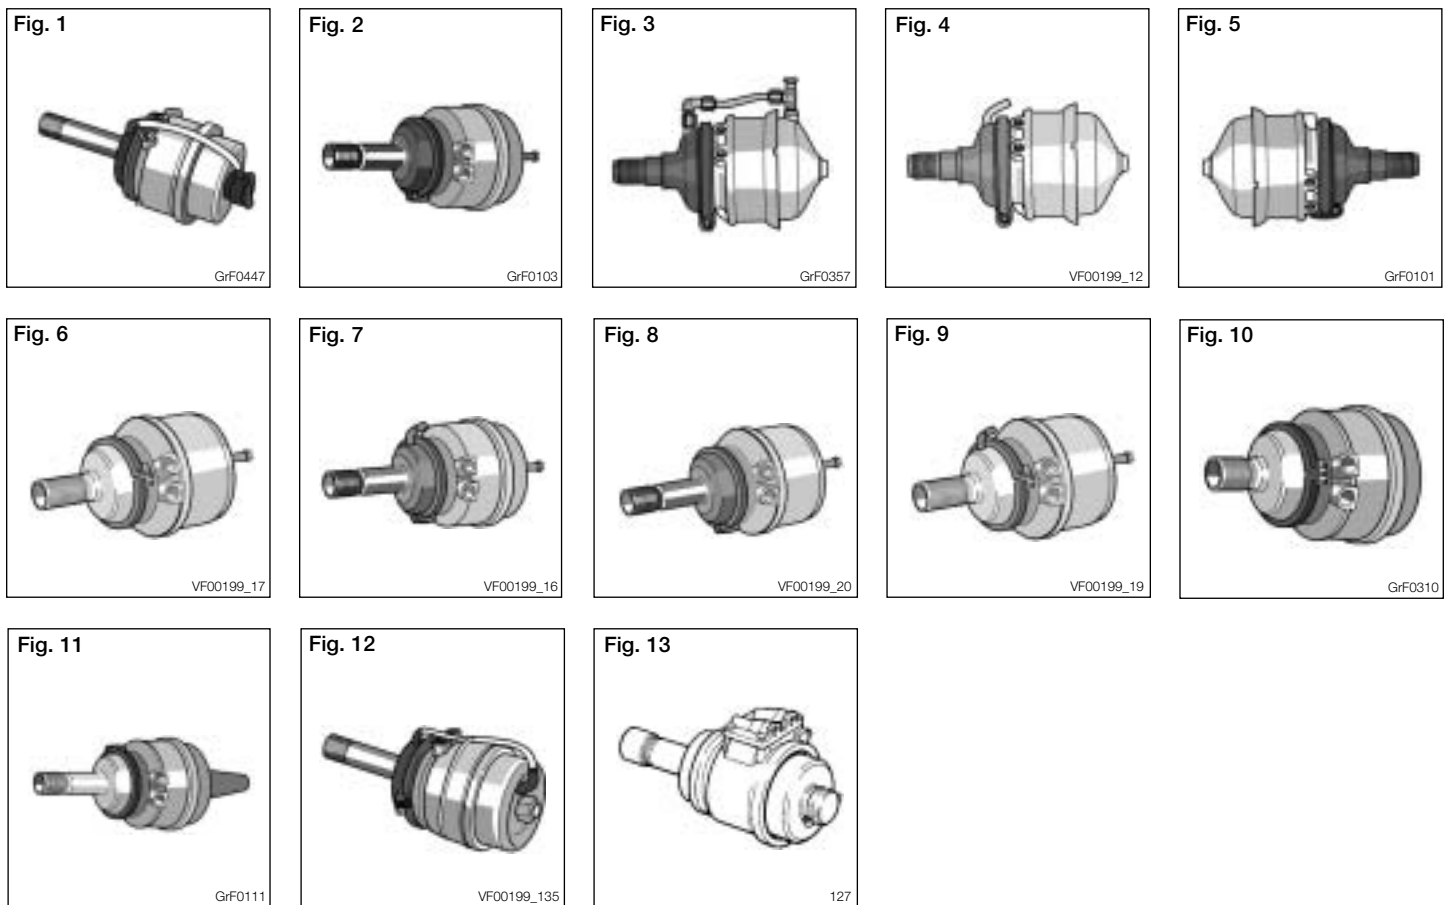

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	Comment/Key
1188882-01	-	1	3/8" NPTF	15	62	50/50	183	T3	
1188899	-		M22x1,5	9	65	50/50	158	T3	
BFM105BK	-	2	M16x1,5	10,5/20	73	47/47	187	T1	
BFM105CXK	-	2	M16x1,5	10,5/20	62	50/50	157	T1	
BFM105DXK	-	2	M16x1,5	10,5/20	62	50/50	187	T1	
BFM121BK	-	2	M16x1,5	12/20	62	50/50	187	T1	
BFM121BX	-	2	M16x1,5	12/20	53,5	50/50	187	T1	
BFM121BXK	-	2	M16x1,5	12/20	53	50/50	187	T1	
BFM121CXK	-	2	M16x1,5	12/20	62	50/50	157	T1	
BFM121EK	-	2	M16x1,5	12/20	62	50/50	157	T1	
BFM122BK	-	2	M16x1,5	12/20HF	73	50/50	187	T1	
BFM141BK	-	2	M16x1,5	14/20	62	50/50	187	T1	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	Comment/Key
BFM141CK	-	2	M16x1,5	14/20	62	50/50	187	T1	
<i>I90543</i>	BY7006	2	M16x1,5	7/16	85	50/50	175	T3	
<i>I90474</i>	BY7116	2	M16x1,5	9/16	87,2	44,5/44,5	138	T1	
<i>I92730</i>	BY7138	3	M16x1,5	9/16	101,7	44,5/44,5	138	T3	
<i>I87162</i>	BY7205	4	M16x1,5	12/20	101,5	44,5/44,5	349	T1	
<i>I90921</i>	BY7206	4	M16x1,5	12/20	101,5	44,5/44,5	187	T1	
<i>I82413</i>	BY7209	5	M16x1,5	12/16	101,5	44,5/44,5	138	T1	
<i>I87164</i>	BY7210	5	M16x1,5	12/20	101,5	44,5/44,5	167	T1	
<i>I90439</i>	BY7268	2	M16x1,5	14/20	87	50/50	187	T1	
<i>I92291</i>	BY8203	2	M16x1,5	12/16	85	50/50	175	T3	
<i>I93253</i>	BY8204	5	M16x1,5	12	101,5	44,5/44,5	144	T1	
<i>II31907</i>	BY8221	2	M16x1,5	12/20HF	91	50/50	187	T4	
<i>II18006</i>	BY9100	2	Voss NG12	9/16	84,6	53/53	175	T3	
<i>II31549</i>	BY9107	6	M16x1,5	9/20	87	53/53	202	T4	
<i>II31994</i>	BY9109	6	M16x1,5	9/20	87	53/53	202	T4	
<i>II38097F</i>	BY9113	7	M16x1,5	9/16	84,6	53/53	191	T4	
<i>II38906F</i>	BY9114	7							
<i>II38907F</i>	BY9115	7							
<i>II16486</i>	BY9150	6	M16x1,5	10,5/20	97,6	53/53	180	T4	
<i>II31550</i>	BY9157	6	M16x1,5	10,5/20	87	53/53	202	T4	
<i>II31995</i>	BY9158	6	M16x1,5	10,5/20	87	53/53	202	T4	
<i>II17085</i>	BY9202	6	M16x1,5	12/20HF	95	53/53	175	T3	
<i>II17468</i>	BY9205	6	M16x1,5	12/20	97,6	53/53	180	T4	
<i>II17470</i>	BY9207	6	M16x1,5	12/20	97,6	53/53	137	T4	
<i>II17564</i>	BY9208	6	Voss NG12	12/16	84,6	53/53	175	T3	
<i>II19456</i>	BY9213		M16x1,5	12/20HF	95	50/50	180	T4	
<i>II30091</i>	BY9215	8	M16x1,5	12/20HF	100	53/53	187	T4	
<i>II31551</i>	BY9216	6	M16x1,5	12/20	87	53/53	202	T4	
<i>II31649</i>	BY9217	8	M16x1,5	12/20HF	100	53/53	301	T4	
<i>II31654</i>	BY9219	9	M16x1,5	12/20	87	53/53	180	T4	
<i>II31996</i>	BY9220	6	M16x1,5	12/20	87	53/53	202	T4	
<i>II36537</i>	BY9225	8	M16x1,5	12/20HF	100	53/53	187	T1	
<i>II38904F</i>	BY9227								
<i>II38905F</i>	BY9228								
<i>II39595F</i>	BY9230								
<i>II17471</i>	BY9250	6	M16x1,5	14/20	97,6	50/50	167	T4	
<i>II17472</i>	BY9251	6	M16x1,5	14/20	97,6	53/53	180	T4	
<i>II19397</i>	BY9258	6	M16x1,5	14/20HF	95	53/53	175	T3	
<i>II19750</i>	BY9260	6	M16x1,5	14/24HF	108	53/53	190	T4	
<i>II36716</i>	BY9269	6	M16x1,5	14/20	97,6	53/53	202	T4	
<i>II36717</i>	BY9270	6	M16x1,5	14/20	97,6	53/53	202	T4	
<i>II39358F</i>	BY9272								
<i>II39606F</i>	BY9274								
<i>K001057</i>	BY9276	6	M16x1,5	16/24HF	125	53/53	190	T4	
<i>II15571</i>	BY9300	6	M16x1,5	16/24	102	53/53	190	T4	
<i>II17086</i>	BY9303	6	M16x1,5	16/24HF	108	53/53	190	T4	
<i>II17473</i>	BY9304	6	M16x1,5	16/20	97,6	53/53	167	T4	
<i>II17474</i>	BY9305	6	M16x1,5	16/20	97,6	53/53	180	T4	
<i>II17475</i>	BY9306	6	M16x1,5	16/20HF	100	53/53	180	T4	
<i>II19361</i>	BY9312	6	M16x1,5	16/20HF	95	53/53	175	T3	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	Comment/Key
<i>II19469</i>	BY9314	6	Voss NG12	16/20HF	94,6	53/53	175	T3	
<i>II39229F</i>	BY9328								
<i>II39372F</i>	BY9329		M16x1,5	16/24	102	53/53	247	T2	
<i>K001059</i>	BY9331	6	M16x1,5	16/24HF	125	53/53	190	T4	
<i>I98822</i>	BY9350	6	M16x1,5	18/24	102	53/53	190	T4	
<i>II16159</i>	BY9351	6	M16x1,5	18/24HF	108	53/53	190	T4	
<i>I98823</i>	BY9400	6	M16x1,5	20/24	102	53/53	190	T4	
<i>II16160</i>	BY9401	6	M16x1,5	20/24HF	108	53/53	190	T4	
<i>II16567</i>	BY9402	8	M16x1,5	20/24	102	53/53	190	T4	
<i>II32135</i>	BY9408	6	M16x1,5	20/24	102	53/53	245	T4	
<i>II37312</i>	BY9411	6	M16x1,5	20/24	102	53/53	194	T2	
<i>II37313</i>	BY9412	6	M16x1,5	20/24	102	53/53	224	T2	
<i>II38931F</i>	BY9414	6	M16x1,5	20/24	102	53/53	247	T2	
<i>I98824</i>	BY9450	6	M16x1,5	22/24	102	53/53	190	T4	
<i>II17755</i>	BY9451	6	M16x1,5	22/24HF	108	53/53	190	T4	
<i>II18692</i>	BY9452	9	M16x1,5	22/24HF	108	53/53	190	T4	
<i>II18693</i>	BY9453	9	M16x1,5	22/24HF	108	53/53	245	T4	
<i>II32122</i>	BY9458	6	M16x1,5	22/24	102	53/53	190	T4	
<i>II37342</i>	BY9463		M16x1,5	22/24	102	53/53	190	T4	
<i>I98825</i>	BY9500	6	M16x1,5	24/24	102	53/53	190	T4	
<i>II17756</i>	BY9501	6	M16x1,5	24/24HF	108	53/53	190	T4	
<i>II18222</i>	BY9502	8	M16x1,5	24/24	102	53/53	190	T4	
<i>II18691</i>	BY9504	9	M16x1,5	24/24HF	108	53/53	245	T4	
<i>II34017</i>	BY9505	6	M16x1,5	24/24	102	53/53	247	T2	
<i>II37145</i>	BY9506	6	M16x1,5	24/24	102	53/53	194	T2	
<i>K002163</i>	BY9512	6	M16x1,5	24/24	102	53/53	224	T2	
<i>I94915</i>	BZ7104	10	M16x1,5	9/20	96,6	44,5/44,5	215	T1	
<i>I94916</i>	BZ7105	10	M16x1,5	9/20	96,6	44,5/44,5	187	T1	
<i>I80153</i>	BZ7112	11	M16x1,5	9/20	96,6	44,5/44,5	138	T1	
<i>I80157</i>	BZ7113	11	M16x1,5	9/20	96,6	44,5/44,5	215	T1	
<i>I80152</i>	BZ7114	11	M16x1,5	9/20	96,6	44,5/44,5	187	T1	
<i>I86141</i>	BZ7141	11	M16x1,5	9/14	67,5	44,5/44,5	138	T1	
<i>I94919</i>	BZ7209	10	M16x1,5	12/20	96,6	44,5/44,5	138	T1	
<i>I94920</i>	BZ7210	10	M16x1,5	12/20	96,6	44,5/44,5	187	T1	
<i>I80147</i>	BZ7222	11	M16x1,5	12/20	96	47/47	187	T1	
<i>I80145</i>	BZ7226	11	M16x1,5	12/20	96	47/47	138	T1	
<i>I80151</i>	BZ7228	11	M16x1,5	12/20	96	47/47	250	T1	
<i>I84249</i>	BZ7268	11	M16x1,5	12/20	96	47/47	157	T1	
K2E4000XU	-	12	M22x1,5	9	65	53	186	T4	
K2E4001XU	-	12	3/8" NPTF	9	47	50/50	187	T1	
K2E4002XU	-	12	M16x1,5	9	47	50/50	187	T4	
K2E4004XU	-	12	M16x1,5	12	65	53/53	161	T4	
K2E4007XU	-	12	M16x1,5	20	71	53/53	240	T2	
K2E4035XU	-	12	M16x1,5	12	65	53/53	161	T4	
K2E4036XU	-	12	M16x1,5	12	65	53/53	161	T4	
KZ1176/7	-	1	1/4" NPTF	9	64	44	195	T1	
KZ1177/11	-	1	1/4" NPTF	12	64	44,5/44,5	162,5	T1	
KZ1177/13	-	1	1/4" NPTF	12	64	44	183	T1	
KZ1177/7	-	1	1/4" NPTF	12	64	44	195	T1	
KZ1177/8	-	1	1/4" NPTF	12	64	44,5/44,5	210	T1	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	D	Comment/Key
KZ1192/1	-	1	M16x1,5	12	64	44	167	T1	
KZ1192/2	-	1	M16x1,5	12	64	44	179	T1	
KZ894/4XU	-	13	1/4" NPTF	9	65	44/44	151	T1	

Key:

- A** Spring Portion Force at zero stroke
B Stroke (stroke of service portion/stroke of spring portion)
C Tube length (Measured to c/l of air port)
 • Preferred Product




Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	Comment/Key
0482513205000	-	1	M22x1,5	9/16	84	53/53	180	
0482513551000	-	1	M22x1,5	14/24	100	53/53	180	
0482513552000	-	1	M22x1,5	14/24	100	53/53	180	
0482513556000	-	1	M22x1,5	14/24	100	53/53	180	
0482513557000	-	1	M22x1,5	14/24	100	53/53	180	
0482513604000	-	1	M16x1,5	16/20	90	53/53	180	
0482513606000	-	1	M22x1,5	16/24	100	53/53	180	
0482513607000	-	1	M22x1,5	16/24	100	53/53	180	
0482513610000	-	1	M22x1,5	16/24	100	53/53	180	
0482513611000	-	1	M22x1,5	16/24	100	53/53	180	
0482513704000	-	1	M16x1,5	18/20	90	53/53	180	
0482513705000	-	1	M16x1,5	18/20	90	53/53	180	
0482513802000	-	1	M22x1,5	20/24	100	53/53	180	
0482513803000	-	1	M22x1,5	20/24	100	53/53	180	
0482513908000	-	1	M22x1,5	22/24	100	53/53	180	
0482513909000	-	1	M22x1,5	22/24	100	53/53	180	
1188881-01	-	2	3/8" NPTF	15	62	50	184	
1188881-02	-	2	3/8" NPTF	15	62	50/50	184	
I88636	BY7114	3	Voss NG12	9/16	84,6	53/53	172	
I88637	BY7115	3	Voss NG12	9/16	84,6	53/53	172	
I86321	BY7151	3	Voss NG12	10,5/16	84,6	53/53	172	Symmetrical to BY7152
I86323	BY7203	3	Voss NG12	12/16	84,6	53/53	172	
I87566	BY7248	3	Voss NG12	12/16	84,6	53/53	172	
I87567	BY7249	3	Voss NG12	12/16	84,6	53/53	172	
II18887	BY9000	4	Voss NG12	7/16	84,6	53/53	175	
II18888	BY9001	4	Voss NG12	7/16	84,6	53/53	175	
II18523000	BY9103	4	Voss NG12	9/16	96,6	53/53	172	Symmetrical to BY9104
II18524000	BY9104	4	Voss NG12	9/16	96,6	53/53	172	Symmetrical to BY9103
II18525000	BY9153	4	Voss NG12	10,5/16	84,6	53/53	175	Symmetrical to BY9154
II18526000	BY9154	4	Voss NG12	10,5/16	84,6	53/53	175	Symmetrical to BY9153
II16575000	BY9200	4	Voss NG12	12/16	84,6	53/53	175	Symmetrical to BY9201
II16576000	BY9201	4	Voss NG12	12/16	84,6	53/53	175	Symmetrical to BY9200
II35106	BY9223	5	Voss NG12	12/16	84,6	53/53	141	
II35107	BY9224	5	Voss NG12	12/16	84,6	53/53	141	
II30393000	BY9263	4	M16x1,5	14/24	102	53/53	200	
II18844	BY9308	4	M22x1,5	16/24	102	53/53	173	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	Comment/Key
<i>II18845</i>	BY9309	4	M22x1,5	16/24	102	53/53	173	
<i>II35117</i>	BY9321		M16x1,5	16/24	102<	53/53	200	
<i>II36724</i>	BY9322	5	Voss NG12	16/24	102	53/53	175	
<i>II36725000</i>	BY9323	5	Voss NG12	16/24	102	53/53	175	
<i>II36726</i>	BY9409	5	Voss NG12	20/24	102	53/53	181	
<i>II36727</i>	BY9410	5	Voss NG12	20/24	102	53/53	181	
<i>II40488F</i>	BY9416							
<i>II40489F</i>	BY9417							
<i>II36728</i>	BY9461	5	Voss NG12	22/24	102	53/53	181	
<i>II36729</i>	BY9462	5	Voss NG12	22/24	102	53/53	181	
<i>II39940F</i>	BY9508		M16x1,5	24/20	97,6	53/53	200	
KZ1237/3	-	2	M22x1,5	12	65	50/50	169	
KZ1237/4	-	2	M22x1,5	12	65	50/50	169	
KZ1252/3	-	2	M22x1,5	9	65	50	169	
KZ1252/4	-	2	M22x1,5	9	65	50	169	
KZ1285/1	-	2	M16x1,5	12	47	50/50	183	
KZ1285/3	-	2	M16x1,5	12	47	50/50	183	
KZ1286/1	-	2	M16x1,5	15	62	50	183	
KZ1286/3	-	2	M16x1,5	15	62	50	183	
KZ1289/3	-	2	M22x1,5	10,5	65	50/50	169	
KZ1289/4	-	2	M22x1,5	10,5	65	50/50	169	
KZ1290/3	-	2	M22x1,5	14	83	50	170	
KZ1290/4	-	2	M22x1,5	14	83	50	170	

Key:

- A** Spring Portion Force at zero stroke
B Stroke (stroke of service portion/stroke of spring portion)
C Push rod protrusion
 • Preferred Product



Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	Comment/Key
II38524F000	BS7304		M16x1,5	16/24	73	57/57	15	
II39355F000	BS7309		M16x1,5	16/24	73	57/57	15	
II39933F	BS7312	2						
II39934F	BS7313	2						
II38120F000	BS7350		M16x1,5	18/24	73	57/57	15	
II39687F	BS8302	2						
II39925F	BS8304							
II39926F	BS8305							
II39969F	BS8307	2						
II40494F	BS8307	2						
II39970F	BS8308	2						
II40495F	BS8308	2						
II39967F	BS8309	2						
II40496F	BS8309	2						
II39968F	BS8310	2						
II40497F	BS8310	2						
K001181	BS8320	1						
K001182	BS8321	1						
K001898	BS8322		M16x1,5	16/27	128	57/57	15	
K001899	BS8323		M16x1,5	16/27	128	57/57	15	
K001031	BS8413	1	Voss NG12	20/24HF	112	64/64	15	
K001032	BS8414	1	Voss NG12	20/24HF	112	64/64	15	
K001238	BS8415	2						
K001760	BS8424	2	M16x1,5	20/24	102	57/57	15	
K001761	BS8425	2	M16x1,5	20/24	102	57/57	15	
K001970	BS8426	2	Voss NG12	20/24HFL3	130	64/64	15	
K001971	BS8427	2	Voss NG12	20/24HFL3	130	64/64	15	
II40500F	BS8450	2	Voss NG12	22/24	102	64/64	15	
II40501F	BS8451	2	Voss NG12	22/24	102	64/64	15	
K000699	BS8452	2						
K000700	BS8453	2						
II38470F000	BS8500	3	M16x1,5	24/30	131	57/57	15	
II38471F000	BS8501	3	M16x1,5	24/30	131	57/57	15	
II38486F	BS8502	3	Voss NG12	24/24	102	75/64	20	
II38487F	BS8503	3	Voss NG12	24/24	102	75/64	20	
II38534F	BS8504	2	M16x1,5	24/24	102	57/57	15	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	Comment/Key
II38547F	BS8506	2	Voss NG12	24/24HFL3	113	64/64	15	
II38922F	BS8516	2						
II39219F000	BS8517	2	M16x1,5	24/24	102	64/64	15	
II39614F	BS8519	2						
II39929F	BS8520	2						
II39930F	BS8521	2						
II39958F	BS8522	2						
K000797	BS8529	2						
K000798	BS8530	2						
K001436	BS9083	2	Voss NG12	10/16	88	57/57	15	
K001437	BS9084	2	Voss NG12	10/16	88	57/57	15	
K001029	BS9086	2	Voss NG12	10/16	88	57/57	15	
K001030	BS9087	2	Voss NG12	10/16	88	57/57	15	
II39935F	BS9088	3	Voss NG12	10/16	90	57/57	20	
II39936F	BS9089	3	Voss NG12	10/16	90	57/57	20	
II39210F	BS9090	3	Voss NG12	10/16	90	57/57	20	
II38488F	BS9092	3	Voss NG12	10/16	90	57/57	20	
II38489F	BS9093	3	Voss NG12	10/16	90	57/57	20	
II38049F	BS9188	2	M16x1,5	12/16	85	57/57	15	
II37867	BS9189	2	M16x1,5	12/16	95	57/57	15	
II37866	BS9190	2	M16x1,5	12/16	95	57/57	15	
II37520	BS9193	2	Voss NG12	12/16	85	57/57	15	
II36338	BS9196	2	Voss NG12	12/16	85	57/57	15	
II33885	BS9197	2	Voss NG12	12/16	95	57/57	15	
II33647	BS9198	2	Voss NG12	12/16	95	57/57	15	
K000978	BS9265	3						
K000979	BS9266	3						
K001483	BS9267	2	M16x1,5	14/24	102	57/57	15	
K001902	BS9269		M16x1,5	14/27	128	57/57	15	
K001903	BS9270		M16x1,5	14/27	128	57/57	15	
K001887	BS9271	2	M16x1,5	12/24	102	57/57	15	
K001976	BS9283	2	M16x1,5	14/16	85	57/57	15	
II38428F	BS9287	2	M16x1,5	14/16	63	57/57	15	
II33886	BS9295	2	Voss NG12	14/16	76	57/57	15	
II33648	BS9296	2	Voss NG12	14/16	76	57/57	15	
II31783000	BS9297	2	M16x1,5	14/16	65	57/57	15	
II30619000	BS9304	2	M16x1,5	16/24	102	57/57	15	
II32600	BS9305	2	Voss NG12	16/24	102	57/57	15	
II32601000	BS9306	2	Voss NG12	16/24	83	57/57	15	
II32700000	BS9308	1	Voss NG12	16/24HFL3	131	64/64	15	
II32175000	BS9311	3	Voss NG12	16/24HFL3	113	64/64	15	
II33767	BS9320	4	Voss NG12	16/24HFL1	97	57/57	15	
II33770	BS9321	4	Voss NG12	16/24HFL2	97	57/57	15	
II33992	BS9322		M16x1,5	16	130	64/64	15	
II33998	BS9323	2	M16x1,5	16/27	105	64/45	15	
II37264	BS9326	2	Voss NG12	16/24HF	130	64/64	15	
II37265	BS9327	2	Voss NG12	16/24HF	130	64/64	15	
II37317	BS9330	2	Voss NG12	16/24HF	130	64/64	15	
II37318	BS9331	2	Voss NG12	16/24HF	130	64/64	15	
II37883	BS9332	2	M16x1,5	16/24	83	57/57	15	

Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	Comment/Key
II31663000	BS9349	2	M16x1,5	18/16	65	57/57	15	
II33993	BS9353	2	M16x1,5	18	130	64/45	15	
II33999	BS9354	2	M16x1,5	18/27	128	64/64	15	
II34184	BS9355	2	M16x1,5	18/27	128	64/64	15	
II35736000	BS9356		M16x1,5	18/24	102	64/64	15	
II37885	BS9357		M16x1,5	18/24	102	57/57	15	
II37886	BS9358		M16x1,5	18/24	102	57/57	15	
II39600F	BS9359	3	M16x1,5	18/24	102	64/64	15	
II39601F	BS9360	3	M16x1,5	18/24	102	64/64	15	
K001605	BS9366							
K001606	BS9367							
II39213F	BS9373		M16x1,5	16/16	83	57/57	15	
II39212F	BS9374		M16x1,5	16/16	83	57/57	15	
II38496F000	BS9377		M16x1,5	16/16	65	57/57	15	
II38407F	BS9382	2	Voss NG12	16/16	65	57/57	15	
II37871	BS9386	2	M16x1,5	16/16	95	57/57	15	
II37870	BS9387	2	M16x1,5	16/16	95	57/57	15	
II37138	BS9390	2	M16x1,5	16/16	89	57/57	15	
II37139	BS9391	2	M16x1,5	16/16	89	57/57	15	
II32159	BS9395	2	Voss NG12	16/16	95	57/57	15	
II32160	BS9396	2	Voss NG12	16/16	95	57/57	15	
II31227000	BS9397	2	M16x1,5	16/16	65	57/57	15	
II18224	BS9398	3	M16x1,5	16/16	65	57/57	15	
II32604000	BS9405	2	Voss NG12	20/24	83	64/64	15	
II32605000	BS9406	2	Voss NG12	20/24	83	64/64	15	
II32602000	BS9407	2	Voss NG12	20/24	83	57/57	15	
II32606	BS9409	2	Voss NG12	20/24	102	64/64	15	
II32607	BS9410	2	Voss NG12	20/24	102	64/64	15	
II32701000	BS9411	2	Voss NG12	20/24HFL3	113	64/64	15	
II32702000	BS9412	2	Voss NG12	20/24HFL3	113	64/64	15	
II33994	BS9420	2	M16x1,5	20	130	64/45	15	
II34000	BS9421	2	M16x1,5	20/27	105	64/64	15	
II34185	BS9424	2	M16x1,5	20/27	105	64/64	15	
II31097000	BS9426	2	M16x1,5	20/30	130	57/57	15	
II34392	BS9427	2	Voss NG12	20	69	64/45	15	
II34393	BS9428	2	Voss NG12	20	69	64/45	15	
II36962	BS9433	2	Voss NG12	20/24HFL1	112	75/75	20	
II36972F	BS9434	2	Voss NG12	20/24HFL1	112	75/75	20	
II37266	BS9437	2	Voss NG12	20/24HFL3	112	64/64	15	
II37267	BS9438	2	Voss NG12	20/24HFL3	112	64/64	15	
II37887	BS9445	2	M16x1,5	20/24	102	57/57	15	
II37888	BS9446	2	M16x1,5	20/24	102	57/57	15	
II37909	BS9448	2	M16x1,5	20/30	110	57/57	15	
II30477	BS9450	2	Voss NG12	22/24	102	64/57	15	
II31226000	BS9451	2	M16x1,5	22/24	83	57/57	15	
II33995	BS9455	2	M16x1,5	22	130	64/45	15	
II34001	BS9456	2	M16x1,5	22/27	105	64/64	15	
II34186	BS9457	2	M16x1,5	22/27	105	64/64	15	
II34389	BS9458	2	Voss NG12	20/24	83	64/64	15	
II37906	BS9461	2	Voss NG12	22/24	102	64/64	15	





Part Number	Type No.	Fig.	Port Sizes	Type Size	A x100[N]	B [mm]	C [mm]	Comment/Key
<i>II38116F</i>	BS9462							
<i>II38132F</i>	BS9463							
<i>II38393F</i>	BS9474	3	Voss NG12	20/24HFL1	112	75/75	20	
<i>II38394F</i>	BS9475	3	Voss NG12	20/24HFL1	112	75/75	20	
<i>II38408F</i>	BS9476	2	Voss NG12	20/24	83	64/64	15	
<i>II38522F</i>	BS9478	2	Voss NG12	20/27	128	64/64	15	
<i>II38551F</i>	BS9480	2						
<i>II38568F</i>	BS9482	3	M22x1,5	20/24HFL1	112	75/75	20	
<i>II38552F</i>	BS9482	2	M22x1,5	20/24HFL1	112	75/75	20	
<i>II38569F</i>	BS9483	2	M22x1,5	20/24HFL1	112	75/75	20	
<i>II38570F</i>	BS9484	2	M22x1,5	20/24HFL1	112	75/75	20	
<i>II39222F</i>	BS9487	2	Voss NG12	20/24HFL1	112	75/75	20	
<i>II39575F</i>	BS9488	2	M16x1,5	22/24	73	57/57	20	
<i>II39576F</i>	BS9489	2	M16x1,5	22/24	73	57/57	20	
<i>II39668F</i>	BS9491	2						
<i>II39669F</i>	BS9492	2						
<i>II40323F</i>	BS9499	2	M16x1,5	20/30	130	57/57	15	
<i>II32608</i>	BS9500	2	Voss NG12	24/24	102	57/57	15	
<i>II32703</i>	BS9502	2	Voss NG12	20/24HFL3	130	64/64	15	
<i>II31408</i>	BS9503	2	M16x1,5	24/24	102	57/57	15	
<i>II32609000</i>	BS9504	2	Voss NG12	24/24	83	64/64	15	
<i>II32697</i>	BS9505	2	Voss NG12	24/24	83	64/64	15	
<i>II32009</i>	BS9506	2	Voss NG12	24/24	102	64/57	15	
<i>II32161000</i>	BS9507	3	Voss NG12	24/30	102	64/45	15	
<i>II32173</i>	BS9508	2	Voss NG12	24/24	102	57/57	15	
<i>II32174</i>	BS9509	2	Voss NG12	24/24HFL3	130	64/64	15	
<i>II33679</i>	BS9510	2	M16x1,5	24/14	52	64/45	15	
<i>II33062</i>	BS9514	2	Voss NG12	24/130	102	64/45	15	
<i>II33996</i>	BS9517	2	M16x1,5	24	130	64/45	15	
<i>II34002</i>	BS9518	2	M16x1,5	24/27	105	64/64	15	
<i>II34187</i>	BS9519	2	M16x1,5	24/27	105	64/64	15	
<i>II34388</i>	BS9520	2	Voss NG12	24/24	83	57/57	15	
<i>II34870</i>	BS9522	2	Voss NG12	24/24HFL1	113	64/64	15	
<i>II35112</i>	BS9523	2	M16x1,5	24/24	102	57/57	15	
<i>II35699</i>	BS9524	2	M16x1,5	24/24	102	57/57	15	
<i>II19461000</i>	BS9526	3	M16x1,5	24/30	132	57/57	15	
<i>II34198</i>	BS9527	2	M16x1,5	24/30	132	64/64	15	
<i>II35719</i>	BS9528	2	M16x1,5	24/30	110	64/64	15	
<i>II37124</i>	BS9531	2	M16x1,5	24/14	64	64/45	15	
<i>II37282</i>	BS9534	2	Voss NG12	24/24	132	64/64	15	
<i>II37468</i>	BS9535	2	Voss NG12	24/24HFL1	98	64/64	15	
<i>II37747000</i>	BS9536	2	M16x1,5	24/30	131	57/57	15	
	BS9555	2	M16x1,5	27/130		64/45	15	
	BS9556	2	M16x1,5	27/27	105	64/64	15	
	BS9557	2	M16x1,5	27/27	105	64/64	15	

36. Spring Brakes (Remote)



Key:

- A Spring Portion Force at zero stroke
- B Stroke
- C Push rod thread or Yoke (Y)
- D For Cam Brake (S) or Disc Brake (D)
- Preferred Product



Part Number	Type No.	Fig.	Port Size	Piston Dia.	A x100[N]	B [mm]	C	D	Comment/Key
0482071011000	-	1	M16x1,5	150	92	72	M16x1,5	S	
0482074003000	-	1	M16x1,5	130	69	72	M16x1,5	S	
0482075008000	-	2	M16x1,5	175	125	70	M16x1,5	S	
0482075010000	-	3	M16x1,5	175	125	70	M16x1,5	S	
0482075011000	-	4	M16x1,5	175	144	100	M16x1,5	S	
1053245000	-		M16x1,5	150	103	100	Y	D	
1186753	-	5	M16x1,5	50	50	40	Y	D	
1186754	-	5	M16x1,5	61	61	40	Y	D	
1188823	-	5	M16x1,5	61	61	40	Y	D	
1188824XU	-	5	M16x1,5	50	50	40	Y	D	
1188845	-	5	M16x1,5	61	61	40	Y	D	
1189449	-	5	M22x1,5	50	50	40	Y	D	
1189458	-	5	M22x1,5	61	61	40	Y	D	
443612193011	-								
443612193025	-		M12x1,5	100	25 (38)	70	M14x1,5	S	
443612193026	-		M12x1,5	100	25 (38)	70	M14x1,5	S	
443612193010	-								
443612193012	-								
443612193013	-								
443612193017	-								
443612193018	-								
443612193019	-								
443612193020	-								
443612193022	-								
443612193027	-								
EM3A	-		M22x1,5	156	156	45	Y	S	
EM3B	-		M22x1,5	156	95	45	Y	S	
KY957/6	-	6	1/4" NPTF	120	108	50	1/2" UNF	S	

36. Spring Brakes (Remote)

Part Number	Type No.	Fig.	Port Size	Piston Dia.	A x100[N]	B [mm]	C	D	Comment/Key
KZ1254/3	-	5	1/4" NPTF	120	61	40	Y	D	
<i>I74164</i>	SZ1306		M14x1,5	50	80	40	Y	S	
<i>I75336</i>	SZ1308		M14x1,5	63	112	80	Y	S	
<i>II32921</i>	SZ1317		M14x1,5	62	112	80	Y	S	
<i>II35695</i>	SZ1318		M14x1,5	62	122,8	75	Y	S	
<i>II36378</i>	SZ1319		M14x1,5	62	122,8	75	Y	S	
<i>I84626</i>	SZ1512		M22x1,5	80	245	60	Y	S	
<i>I34514</i>	SZ1602		M22x1,5	100	303,3	80	M12x1,5	S	
<i>I40719</i>	SZ1605		M22x1,5	100	36	80	M16x1,5	S	
<i>I66577</i>	SZ1611	7	M22x1,5	100	46	80	Y	S	
<i>I75749</i>	SZ1615		M22x1,5	100	17	80	M12x1,5	S	
<i>I75226</i>	SZ1704		M22x1,5	125	68,2	50	Ø 10mm	S	
<i>I75053</i>	SZ1750	7	M16x1,5	130	67,5	70	Y	S	
<i>I50993</i>	SZ1806		M22x1,5	150	87	70	M12x1,5	S	
<i>I80076</i>	SZ1808	7	M16x1,5	150	83	70	Y	S	
<i>I77897</i>	SZ1817		M22x1,5	150	87	90	M14x1,5	S	
<i>II36375</i>	SZ1817		M22x1,5	150	87	90	M14x1,5	S	
<i>I79165</i>	SZ3500	8	M16x1,5	610	79	60	M16x1,5	S	

37. Stroke Warning Switches

Key:

- Preferred Product

Part Number	Type No.	Fig.	Comment/Key	
1111314000	-			
1111360000	-			

38. Slack Adjusters






38.1 Slack Adjusters (Automatic)

Key:

- A Left offset (L) or Right offset (R) [mm] Straight (-)
B Maximum torque
C Hole Sizes

Spline Types:

- | | | | |
|---|---------------------------|---|--------------------------------|
| A | 1,5" SAE 10C | H | 26 SPLINE DIN 5480 N42 x 1,5 |
| B | 8 SPLINE 8x32x38 DIN 5463 | I | 27 SPLINE E22-151 BNA-42 x 1,5 |
| C | 14 SPLINE JIS D | J | 28 SPLINE ANSI B92-1 |
| D | 19 SPLINE DIN 5482 | K | 33 SPLINE ANSI B92-1 |
| E | 20 SPLINE DIN 5482 | L | 36 SPLINE DIN 5481 |
| F | 24x1,25 SPLINE DIN 5480 | M | 37 SPLINE ANSI B92 - 1 |
| G | 25 SPLINE JIS B 1602 | N | 37 SPLINE DIN 5481 |
| • | Preferred Product | | |

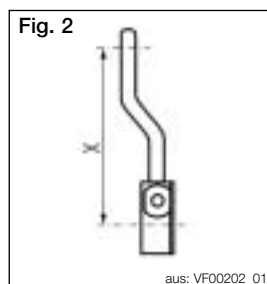

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
1194263	-	1	A	127/152,4/177,8/203,2	-		12,7
1194264	-	1	A	127/152,4/177,8/203,2	-		12,7
KB1000	-	1	A	115/127/140/153/205	-	3389	14,0
KB1005	-	1	A	120/135/150/165/180/250	-	3389	14,0
KB1010	-	1	A	120/135/150/165/180/250	-	3389	14,0
KB1015	-	1	A	125/150/180/210	-	3389	14,0
KB1020	-	1	M	105/129/153/215	-	3389	14,0/16,0
KB1025	-	1	A	105/129/153/215	-	3389	14,0/16,0
KB1030	-	1	A	105/125/140/155/180/250	-	3389	14,0
KB1035	-	1	A	125/150/180/210/250	-	3389	14,0
KB1040	-	1	A	105/129/153/181/215	-	3389	14,0
KB1050	-	1	M	105/129/153/215	-	3389	14,0/16,0
KB1055	-	1	A	105/129/153/181/215	-	3389	14,0
KB1060	-	1	A	105/129/153/181/215	-	3389	12,8
KB1065	-	1	A	127/152/178/203	-	3389	12,8
KB1070	-	1	A	118/142/215	-	3389	14,0/16,0
KB1075	-	1	A	125/150/180/210/250	-	3389	14,0
KB1080	-	1	A	127/152/176/200	-	3389	14,0
KB1085	-	3	A	125/150/180	R 16	2937	14,0
KB1090	-	2	A	125/150/180	L 16	2937	14,0
KB1095	-	1	A	105/129/153	-	3389	14,0
KB1100	-	1	A	105/129/153/181/215	-	3389	14,0
KB1105	-	1	A	120/150/180/250	-	3389	14,0
KB1110	-	2	A	127/152/178	L 25	2711	14,0
KB1115	-	3	A	151/179/203	R 38	2485	14,0
KB1120	-	2	A	153/181/205	L 38	2485	14,0
KB1125	-	1	A	125/150/180/210	-	3389	14,0
KB1130	-	2	A	127/152/178	L 25	2711	14,0

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB1135	-	3	A	127/153/179	R 25	2711	14,0
KB1140	-	3	A	128/153	R 45	2260	14,0
KB1145	-	2	A	127/152	L 45	2260	14,0/14,2
KB1150	-	1	A	105/129/153/181/215	-	3389	12,7/12,9
KB1160	-	3	A	127/152/178	R 25	2711	14,0/14,2
KB1165	-	1	M	105/129/153/210	-	3389	14,0/14,2
KB1170	-	1	A	127/141/153	-	3389	14,0/14,2
KB1175	-	1	A	118/142/200	-	3389	14,0/14,2
KB1180	-	1	A	105/125/140/155/180/250	-	3389	14,0/14,2
KB1185	-	1	A	105/129/153/181/215	-	3389	14,0/14,2
KB1190	-	3	A	127/152/178	R 25	2711	14,0/14,2
KB1205	-	3	A	151/179/203	R 38	2485	14,0/14,2
KB1210	-	2	A	151/179/203	L 38	2485	14,0/14,2
KB1215	-	3	A	148/173/198	R 28,5	2485	14,0/14,2
KB1220	-	2	A	148/173/198	L 28,5	2485	14,0/14,2
KB1225	-	3	A	150/180	R 28,5	2485	14,0/14,2
KB1230	-	2	A	150/180	L 28,5	2485	14,0/14,2
KB2000	-	1	A	140	-	3389	14,0
KB2005	-	1	A	140	-	3389	14,0
KB2010	-	3	A	140	R 38	2485	14,0
KB2015	-	2	A	140	L 38	2485	14,0
KB2020	-	3	A	165	R 45	2260	14,0
KB2025	-	2	A	165	L 45	2260	14,0
KB2030	-	1	A	140	-	3389	14,0
KB2035	-	3	A	165	R 38	2485	14,0
KB2040	-	1	H	145	-	3389	14,0
KB2045	-	1	H	145	-	3389	14,0
KB2050	-	3	H	145	R 37	2485	14,0
KB2055	-	2	H	146	L 37	2485	14,0
KB2060	-	2	H	145	L 56	2260	14,0
KB2065	-	3	H	145	R 56	2260	14,0
KB2070	-	3	H	145	R 56	2260	14,0
KB2075	-	2	H	145	L 56	2260	14,0
KB2080	-	1	H	145	-	3389	14,0
KB2085	-	1	N	120/150/180/250	-	3389	14,0
KB2090	-	3	H	145	R 18	2711	14,0
KB2095	-	2	H	145	L 18	2711	14,0
KB2100	-	1	H	130	-	3389	14,0
KB2105	-	2	A	165	L 38	2485	14,0
KB2110	-	2	A	140	L 38	2485	14,0
KB2115	-	3	A	140	R 38	2485	14,0
KB2120	-	3	A	141	R 38	2485	14,0
KB2125	-	2	A	140	L 38	2485	14,0
KB2130	-	1	H	130	-	3389	14,0
KB2135	-	2	H	145	L 56	2260	14,0
KB2140	-	3	H	145	R 56	2260	14,0
KB2145	-	3	H	145	R 37	2485	14,0
KB2150	-	1	H	145	-	3389	14,0
KB2155	-	2	H	145	L 56	2260	14,0
KB2160	-	3	H	143	R 56	2260	14,0

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB2165	-	2	H	145	L 37	2485	14,0
KB2170	-	1	J	140	-	3389	12,8
KB2175	-	1	I	127	-	3389	12,8
KB2180	-	1	A	133	-	3389	12,8
KB2185	-	3	A	133	R 28,5	2485	12,8
KB2190	-	2	A	133	L 28,5	2485	12,8
KB2195	-	1	A	165	-	3389	12,8
KB2200	-	2	A	140	L 16	2937	12,8
KB2205	-	3	A	140	R 16	2937	12,8
KB2210	-	3	A	165	R 50	2260	16,0
KB2215	-	2	A	165	L 50	2260	16,0
KB2220	-	2	A	165	L 25	2711	16,0
KB2225	-	2	I	175	L 38	2485	14,0
KB2230	-	3	I	175	R 38	2485	14,0
KB2235	-	1	J	127	-	3389	12,8
KB2240	-	2	I	175	L 38	2485	14,0
KB2245	-	3	I	175	R 38	2485	14,0
KB2250	-	1	A	165	-	3389	16,0
KB2255	-	1	A	140	-	3389	12,8
KB2260	-	3	A	165	R 25	2711	16,0
KB2265	-	3	A	165	R 38	2485	16,0
KB2270	-	2	A	165	L 38	2485	16,0
KB2275	-	1	A	140	-	3389	12,8
KB2280	-	2	A	145	L 15	2937	12,8
KB2285	-	2	A	134	L 15	2937	12,8
KB2290	-	3	A	134	R 15	2937	12,8
KB2295	-	1	A	152	-	3389	12,8
KB2300	-	3	A	145	R 15	2937	12,8
KB2305	-	1	A	165	-	3389	14,0
KB2310	-	3	A	141	R 38	2485	12,8
KB2315	-	1	A	179	-	3389	12,8
KB2320	-	2	A	165	L 16	2937	12,8
KB2325	-	1	A	140	-	3389	12,8
KB2330	-	1	A	180	-	3389	12,8
KB2335	-	1	A	140	-	3389	12,8
KB2340	-	1	A	165	-	3389	12,8
KB2345	-	2	A	155	L 16	2937	12,8
KB2350	-	3	A	155	R 16	2937	12,8
KB2355	-	3	A	165	R 16	2937	12,8
KB2360	-	2	A	166	L 50	2260	16,0
KB2365	-	2	A	178	L 38	2485	12,8
KB2370	-	1	A	179	-	3389	12,8
KB2375	-	1	A	127	-	3389	12,8
KB2380	-	3	A	120	R 28,5	2485	12,8
KB2385	-	2	A	120	L 28,5	2485	12,8
KB2390	-	2	A	165	L 16	2937	12,8
KB2395	-	1	A	140	-	3389	14,0
KB2400	-	3	A	140	R 12,7	2937	14,0
KB2405	-	3	D	150	R 38	2485	12,8
KB2410	-	2	D	150	L 38	2485	12,8

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB2415	-	1	D	150	-	3389	12,8
KB2420	-	1	H	145	-	3389	14,0
KB2425	-	2	A	140	L 12,7	2937	14,0
KB2430	-	1	A	203	-	3389	12,8
KB2435	-	3	A	165	R 16	2937	12,8
KB2440	-	1	H	115	-	3389	14,0
KB2445	-	2	H	145	L 18	2711	14,0
KB2450	-	3	A	147	R 38	2485	12,8
KB2455	-	2	A	148	L 38	2485	12,8
KB2460	-	1	A	152	-	3389	14,0
KB2465	-	1	A	140	-	3389	12,8
KB2470	-	3	H	145	R 56	2260	14,0
KB2475	-	2	A	155	L 16	2937	12,8
KB2480	-	3	A	155	R 16	2937	12,8
KB2485	-	3	A	152	R 38	2485	12,8
KB2490	-	2	A	152	L 38	2485	12,8
KB2495	-	3	A	178	R 16	2937	12,8
KB2500	-	2	A	178	L 16	2937	12,8
KB2505	-	3	D	146	R 25	2711	14,0
KB2510	-	2	D	147	L 25	2711	14,0
KB2515	-	1	A	140	-	3389	14,0
KB2520	-	3	A	165	R 50	2260	16,0
KB2525	-	2	A	165	L 50	2260	16,0
KB2530	-	2	A	151	L 38	2485	12,8
KB2535	-	3	A	151	R 38	2485	12,8
KB2540	-	2	A	165	L 38	2485	12,8
KB2545	-	3	A	165	R 38	2485	12,8
KB2550	-	3	A	140	R 12,7	2937	12,8
KB2555	-	2	A	140	L 22	2711	12,8
KB2560	-	3	A	133	R 22	2711	12,8
KB2565	-	3	A	133	R 22	2711	12,8
KB2570	-	2	A	133	L 22	2711	12,8
KB2575	-	2	A	127	L 12,7	2937	12,8
KB2580	-	3	A	127	R 12,7	2937	12,8
KB2585	-	2	A	130	L 16	2937	16,0
KB2590	-	3	A	130	R 16	2937	16,0
KB2595	-	3	A	165	R 50	2260	16,0
KB2600	-	2	A	130	L 50	2260	16,0
KB2605	-	3	A	130	R 50	2260	16,0
KB2610	-	2	H	145	L 56	2260	14,0
KB2615	-	3	H	145	R 56	2260	14,0
KB2620	-	3	H	185/216	R 45	2260	8,0/14,0
KB2625	-	2	H	186/216	L 45	2260	8,0/14,0
KB2630	-	3	I	160	R 56,2	2260	14,0
KB2635	-	2	I	160	L 56,2	2260	14,0
KB2640	-	3	I	160	R 38	2485	14,0
KB2645	-	2	I	160	L 38	2485	14,0
KB2650	-	1	A	114	-	3389	12,8
KB2655	-	3	A	178	R 38	2485	12,8
KB2660	-	2	A	159	L 12,7	2937	12,8

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB2665	-	3	A	140	R 12,7	2937	12,8
KB2670	-	1	A	140	-	3389	12,8
KB2675	-	1	A	165	-	3389	14,0
KB2680	-	2	A	164	L 50	2260	16,0
KB2685	-	2	A	140	L 12,7	2937	12,8
KB2690	-	3	A	140	R 12,7	2937	12,8
KB2695	-	2	A	140	L 12,7	2937	12,8
KB2700	-	2	A	140	L 38	2485	12,8
KB2705	-	1	A	152	-	3389	12,8
KB2710	-	1	A	140/165	-	3389	16,0
KB2715	-	3	H	130	R 15	2937	14,0
KB2720	-	2	H	130	L 15	2937	14,0
KB2725	-	2	A	145	L 60	2260	14,0
KB2730	-	3	A	145	R 60	2260	14,0
KB2735	-	3	A	165	R 65	2260	16,0
KB2740	-	2	A	165	L 65	2260	16,0
KB2745	-	1	B	160	-	3389	12,8
KB2750	-	2	H	145	L 60	2260	14,0
KB2755	-	3	H	145	R 60	2260	14,0
KB2760	-	1	A	140	-	3389	14,0
KB2765	-	3	H	145	R 18	2711	14,0
KB2770	-	1	D	135/180	-	3389	14,0
KB2775	-	3	D	160	R 22	2711	14,0
KB2780	-	2	D	160	L 22	2711	14,0
KB2785	-	2	D	145	L 56	2260	14,0
KB2790	-	3	D	145	R 56	2260	14,0
KB2795	-	2	I	175	L 38	2485	14,0
KB2800	-	3	I	175	R 38	2485	14,0
KB2805	-	3	A	140	R 38	2485	14,0
KB2810	-	2	A	139	L 38	2485	14,0
KB2815	-	2	I	175	L 38	2485	14,0
KB2820	-	3	I	175	R 38	2485	14,0
KB2825	-	1	A	140	-	3389	12,8
KB2830	-	2	H	145	L 56	2260	14,0
KB2835	-	1	A	180	-	3389	12,8
KB2840	-	2	H	145	L 56	2260	14,0
KB2845	-	1	D	130	-	3389	14,0
KB2850	-	3	A	165	R 50	2260	16,0
KB2855	-	2	H	145	L 37	2485	14,0
KB2860	-	1	D	152	-	3389	14,0
KB2865	-	1	A	140	-	3389	12,8
KB2870	-	3	I	175	R 56,2	2260	14,0
KB2875	-	2	I	175	L 56,2	2260	14,0
KB2880	-	1	A	140	-	3389	16,0
KB2885	-	1	A	140	-	3389	12,8
KB2890	-	2	A	171	L 12,7	2937	12,8
KB2895	-	3	A	171	R 12,7	2937	12,8
KB2900	-	2	A	159	L 22	2711	12,8
KB2905	-	2	J	160	L 38	2485	14,0
KB2910	-	3	J	160	R 38	2485	14,0

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB2915	-	1	D	160	-	3389	14,0
KB2920	-	3	I	160	R 56,2	2260	14,0
KB2925	-	2	I	160	L 56,2	2260	12,8
KB2930	-	3	H	130	R 18	2711	14,0
KB2935	-	2	D	145	L 56	2260	14,0
KB2940	-	2	I	160	L 38	2485	14,0
KB2945	-	3	I	160	R 38	2485	14,0
KB2950	-	3	H	145	R 56	2260	14,0
KB2955	-	1	J	140	-	3389	12,8
KB2960	-	1	D	152	-	3389	14,0
KB2965	-	1	D	145	-	3389	14,0
KB2970	-	2	A	139	L 56	2260	12,8
KB2975	-	2	D	150	L 38	2485	14,0
KB2980	-	1	I	140	-	3389	14,0
KB2985	-	1	A	127	-	3389	12,8
KB2990	-	3	H	145	R 37	2485	14,0
KB2995	-	1	A	115	-	3389	12,8
KB3000	-	2	A	140	L 38	2485	14,0
KB3005	-	3	A	140	R 38	2485	14,0
KB3010	-	1	A	115	-	3389	12,8
KB3015	-	1	N	120/150/180/250	-	3389	14,0
KB3020	-	1	E	155/175	-	3389	14,0
KB3025	-	1	A	140	-	3389	12,8
KB3030	-	2	D	149	L 22	2711	14,0
KB3035	-	3	D	150	R 22	2711	14,0
KB3040	-	3	I	160	R 56,2	2260	14,0
KB3045	-	2	I	160	L 56,2	2260	14,0
KB3050	-	2	I	175	L 56,2	2260	14,0
KB3055	-	3	I	175	R 56,2	2260	14,0
KB3060	-	1	B	170	-	3389	12,8
KB3065	-	3	D	145	R 56	2260	14,0
KB3070	-	1	A	165	-	3389	17,8
KB3075	-	2	H	145	L 56	2260	14,0
KB3080	-	3	H	145	R 56	2260	14,0
KB3085	-	2	I	175/194	L 38	2485	6,0/14,0
KB3090	-	3	I	175/194	R 38	2485	6,0/14,0
KB3095	-	1	A	127	-	3389	12,8
KB3100	-	1	A	140	-	3389	12,7/12,9
KB3105	-	2	H	146	L 50	2260	14,0
KB3110	-	3	H	145	R 50	2260	14,0
KB3115	-	2	H	131	L 15	2937	14,0
KB3120	-	3	H	130	R 15	2937	14,0
KB3125	-	3	H	115	R 15	2937	14,0
KB3130	-	2	H	116	L 15	2937	14,0
KB3135	-	3	A	165	R 15	2937	12,8
KB3140	-	2	A	165	L 15	2937	12,8
KB3145	-	2	H	145	L 42	2260	14,0/14,2
KB3150	-	3	H	145	R 42	2260	14,0/14,2
KB3155	-	2	H	130	L 18	2711	14,0
KB3160	-	1	B	160	-	3389	12,7/12,9

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB3165	-	1	H	145	-	3389	14,0
KB3170	-	3	A	138	R 56	2260	12,7/12,9
KB3175	-	2	D	145	L 25	2711	14,0
KB3180	-	3	D	145	R 25	2711	14,0
KB3185	-	3	H	87/186/215	R 26	2485	8,0/14,0
KB3190	-	2	H	88/186/215	L 26	2485	8,0/14,0
KB3195	-	2	I	110/190	L 23	2711	8,0/14,0
KB3200	-	3	I	110/190	R 23	2711	8,0/14,0
KB3205	-	1	I	150	-	3389	14,0
KB3210	-	3	A	159	R 22	2711	12,7/12,9
KB3215	-	2	I	115/183	L 22	2711	8,0/14,0
KB3220	-	3	I	116/183	R 22	2711	8,0/14,0
KB3225	-	3	D	150	R 28,5	2485	14,0/14,2
KB3230	-	2	D	150	L 28,5	2485	14,0/14,2
KB3235	-	2	I	160/194	L 38	2485	6,0/14,0
KB3240	-	3	I	160/194	R 38	2485	6,0/14,0
KB3245	-	3	A	130	R 16	2937	12,7/12,9
KB3250	-	2	A	130	L 16	2937	12,7/12,9
KB3255	-	3	D	160	R 38	2485	14,0/14,2
KB3260	-	2	D	160	L 38	2485	14,0/14,2
KB3265	-	3	H	130	R 40	2260	14,0
KB3270	-	2	H	130	L 40	2260	14,0
KB3275	-	3	I	154/270	R 45	2260	8,0/14,0
KB3280	-	2	I	161/270	L 45	2260	8,0/14,0
KB3285	-	3	H	145	R 18	2711	14,0/14,2
KB3290	-	2	H	145	L 18	2711	14,0/14,2
KB3295	-	1	D	152	-	3389	14,0/14,2
KB3300	-	1	J	126	-	3389	12,8
KB3305	-	3	A	151	R 47,6	2260	12,7/12,9
KB3310	-	2	A	151	L 47,6	2260	12,7/12,9
KB3315	-	2	A	165	L 50	2260	16,0
KB3320	-	3	A	165	R 50	2260	16,0
KB3325	-	3	A	164	R 38	2485	12,8
KB3330	-	2	A	165	L 38	2485	12,8
KB3335	-	2	H	130	L 18	2711	14,0
KB3340	-	3	H	130	R 18	2711	14,0
KB3345	-	2	H	130	L 18	2711	14,0/14,2
KB3350	-	3	H	130	R 18	2711	14,0/14,2
KB3355	-	3	D	180	R 28,5	2485	14,0/14,2
KB3360	-	2	D	180	L 28,5	2485	14,0/14,2
KB3365	-	1	H	145	-	3389	14,0/14,2
KB3370	-	2	H	145	L 26	2485	14,0/14,2
KB3375	-	3	H	145	R 26	2485	14,0/14,2
KB3380	-	1	B	180	-	3389	12,7/12,9
KB3385	-	1	B	180	-	3389	12,7/12,9
KB3390	-	3	A	152	R 38	2485	12,7/12,9
KB3395	-	2	A	152	L 38	2485	12,7/12,9
KB3400	-	1	H	145	-	3389	14,0/14,2
KB3405	-	1	A	140	-	3389	14,0/14,2
KB3410	-	3	A	152	R 45	2260	14,0/14,2

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB3415	-	2	A	152	L 45	2260	14,0/14,2
KB3420	-	1	H	130	-	3389	14,0/14,2
KB3425	-	2	A	165	L 11,5	2937	14,0
KB3430	-	3	A	165	R 11,5	2937	14,0
KB3435	-	1	A	127/155	-	3389	12,7/12,9
KB3440	-	3	A	165	R 38	2485	12,8
KB3445	-	2	A	165	L 38	2485	12,7/12,9
KB3450	-	1	A	145	-	3389	14,0/14,2
KB3455	-	1	A	145	-	3389	14,0/14,2
KB3460	-	1	A	165	-	3389	12,7/12,9
KB3465	-	1	B	190	-	3389	12,7/12,9
KB3470	-	2	B	218	L 12,4	2937	12,7/12,9
KB3475	-	3	B	218	R 12,4	2937	12,7/12,9
KB3480	-	1	H	145	-	3389	14,0/14,2
KB3485	-	3	J	160	R 38	2485	14,0/14,2
KB3490	-	2	J	160	L 38	2485	14,0
KB3495	-	1	A	160	-	3389	12,7/12,9
KB3500	-	1	A	133	-	3389	12,7/12,9
KB3505	-	3	A	140	R 38	2485	14,0/14,2
KB3510	-	2	A	140	L 38	2485	14,0/14,2
KB3515	-	3	K	140	R 60	2260	14,0/14,2
KB3520	-	2	A	130	L 35	2485	16,0
KB3525	-	3	A	130	R 35	2485	16,0
KB3530	-	1	A	125/150	-	3389	14,0/14,2
KB3535	-	1	D	180	-	3389	14,0/14,2
KB3540	-	3	A	165	R 25	2711	16,0/16,2
KB3545	-	2	A	165	L 25	2711	16,0/16,2
KB3550	-	3	A	165	R 75	2260	16,0/16,2
KB3555	-	2	A	165	L 75	2260	16,0/16,2
KB3560	-	1	F	160	-	3389	14,0/14,2
KB3565	-	3	A	160	R 28,5	2485	14,0/14,2
KB3570	-	2	A	160	L 28,5	2485	14,0/14,2
KB3575	-	3	D	150	R 38	2485	14,0/14,2
KB3580	-	2	K	140	L 47,6	2260	14,0/14,2
KB3585	-	3	L	140	R 22	2711	14,0/14,2
KB3590	-	2	L	140	L 22	2711	14,0/14,2
KB3595	-	2	G	150	L 60	2260	16,0/16,2
KB3600	-	3	G	150	R 60	2260	16,0/16,2
KB3605	-	1	G	150	-	3389	16,0/16,2
KB3610	-	1	A	165	-	3389	12,7/12,9
KB3615	-	2	A	150	L 28,5	2485	14,0/14,2
KB3620	-	1	A	140	-	3389	12,7/12,9
KB3625	-	1	H	130/175	-	3389	14,0/14,2
KB3630	-	2	J	151	L 38	2485	12,7/12,9
KB3635	-	3	J	152	R 38	2485	12,7/12,9
KB3640	-	1	A	145	-	3389	16,0/16,2
KB3645	-	2	D	152	L 50	2260	14,0/14,2
KB3650	-	3	D	152	R 28,5	2485	14,0/14,2
KB3655	-	3	A	143	R 56	2260	14,0/14,2
KB3660	-	2	A	143	L 56	2260	14,0/14,2


Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [Nm]	C [mm]
KB3665	-	1	A	165	-	3389	14,0/14,2
KB3670	-	3	A	150/180	R 28,5	2485	14,0/14,2
KB3675	-	2	A	150/180	L 28,5	2485	14,0/14,2
KB3680	-	3	D	175	R 38	2485	14,0/14,2
KB3685	-	2	D	175	L 38	2485	14,0/14,2
KB3690	-	3	H	87/215	R 26	2485	14,0/14,2
KB3695	-	2	H	88/215	L 26	2485	14,0/14,2
KB3700	-	2	A	145	L 60	2260	14,0/14,2
KB3705	-	3	A	145	R 60	2260	14,0/14,2
KB3710	-	1	A	127	-	3389	12,7/12,9
KB3715	-	2	H	130	L 35	2485	14,0/14,2
KB3720	-	3	A	130	R 35	2485	16,0/16,2
KB3725	-	3	H	145	R 56	2260	14,0/14,2
KB3730	-	2	H	145	L 56	2260	14,0/14,2
KB3735	-	1	H	145	-	3389	14,0/14,2
KB3740	-	1	B	180	-	3389	12,7/12,9
KB3745	-	3	D	150	R 22	2711	14,0/14,2
KB3750	-	2	D	150	L 22	2711	14,0/14,2
KB3755	-	2	I	160	L 56,2	2260	14,0/14,2
KB3760	-	3	A	140	R 38	2485	14,0/14,2
KB3765	-	2	G	150	L 60,3	2260	16,0/16,2
KB3770	-	3	G	150	R 60,3	2260	16,0/16,2
KB3775	-	1	A	127	-	3389	12,7/12,9
KB3780	-	3	D	200	R 22	2711	14,0/14,2
KB3790	-	2	A	140	L 38	2485	14,0/14,2
KB3795	-	2	H	138	L 60	2260	14,0/14,2
KB3800	-	3	H	145	R 60	2260	14,0/14,2
KB3805	-	2	A	159	L 12,7	2937	12,7/12,9
KB3810	-	3	A	159	R 12,7	2937	12,7/12,9
KB3815	-	3	H	130	R 18	2711	14,0/14,2
KB3820	-	2	H	130	L 18	2711	14,0/14,2
KB3825	-	2	I	175	L 38	2485	14,0/14,2
KB3830	-	3	I	175	R 38	2485	14,0/14,2
KB3835	-	1	I	140	-	3389	14,0/14,2
KB3840	-	3	I	175	R 38	2485	14,0/14,2
KB3850	-	2	I	175	L 38	2485	14,0/14,2
KB3855	-	3	I	175	R 38	2485	14,0/14,2
KB3860	-	1	A	125	-	3389	12,05/12,25
KB3865	-	3	A	130	R 50	2260	12,05/12,25
KB3870	-	2	A	130	L 50	2260	12,05/12,25
KB3875	-	2	C	135	L 50	2260	12,05/12,25
KB3880	-	3	C	135	R 50	2260	12,05/12,25
KB3885	-	1	C	135	-	3389	12,05/12,25
KB3890	-	3	H	145	R 63	2260	14,0/14,2
KB3895	-	2	H	146	L 63	2260	14,0/14,2
KB3900	-	1	E	175	-	3389	14,0/14,2

Key:

- A** Left offset (L) or Right offset (R) [mm] Straight (-)
B Maximum torque
C Hole Sizes

Spline Types:

- A** 1,5" SAE 10C
B 28 SPLINE ANSI B92-1
C 37 SPLINE ANSI B92 - 1
 • Preferred Product




Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [x1000 lbf.in.]	C [mm]	
1186872	-		A	177,8	-	PL30	14,0	
1189483	-		A	165	L 65	PL18	16,0	
1189484	-		A	165	R 65	PL18	16,0	
1194250	-		A	152,4	R 28,6	PL30	12,8	
1194251	-		A	152,4	L 28,6	PL30	12,8	
1194252	-		A	165,1	R 15,9	PL30	16,02	
1194253	-		A	165,1	L 15,9	PL30	16,02	
1194360	-	1	A	127/152/178/203	-	PL20	14,0	
1194361	-		A	127/152/178/203	-	PL20	12,7	
1194362	-	1	A	127/152/178/203	-	PL20	12,7	
1194363	-		A	127/152/178/203	-	PL20	14,0	
1194384	-		A	127/152/178/203	-	PL20	14,0	
1194387	-		A	127/304	-	PL20	12,7/13,5	
267026	-	2	A	165	R 25	PL24	16,0	
267027	-		A	165	L 25	PL24	16,0	
267083	-	2	A	165	L 50	PL18	16,0	
267084	-	2	A	165	R 50	PL18	16,0	
269600	-	3	A	114,3/139,7	-	PL20	12,8	
269717	-		A	114,3/139,7/165,1	-	PL30	12,7	
269858	-	3	A	133	-	PL20	12,8	
269859	-	3	A	140	-	PL20	12,8	
272015	-		A	119,4	R 28,6	PL22	12,8	
272016	-		A	119,4	L 28,6	PL22	12,8	
272017	-		A	133,4	R 28,6	PL22	12,8	
272018	-		A	133,4	L 28,6	PL22	12,8	
272132	-		A	152,4	R 15,9	PL18	12,8	
272133	-		A	152,4	L 15,9	PL18	12,8	
272844	-		A	145	R 15,9	PL 26	12,8	
272845	-		A	145	L 15,9	PL 26	12,8	
272862	-		A	130	R 15,9	PL 18	16,07	
272863	-		A	130	L 15,9	PL 18	16,07	
274657	-		A	139,7	-	PL20	12,8	

Part Number	Type No.	Fig.	Spline type	Effective length X [mm]	A	B [x1000 lbf.in.]	C [mm]	
274971	-		A	165,1	-	PL30	16,0	
278035	-		A	190,5/139,7	-	PL30	15,9	
278039	-		A	165,1	-	PL30	15,9	
278111	-		A	139,7	R 38,1	PL18	12,8	
278112	-		A	139,7	R 38,1	PL18	12,8	
278312	-		A	127/152,4	-	PL20	12,8	
278325	-		A	139,7	-	PL20	12,8	
278326	-		A	114,3/139,7/165,1	-	PL 20	12,7	
281966	-		A	152,4	R 38,1	PL20	12,8	
281967	-		A	152,4	L 38,1	PL20	12,8	
281972	-		A	127	-	PL 20	12,8	
286965	-	3	B	152,4/127,0	-	PL20	12,8	
288753	-		B	165,0/139,7	-	PL20	12,8	
295148	-		A	203,2/177,8/152,4/127	-	PL20	12,8	
295178	-		A	177,8	-	PL30	12,8	
295183	-		A	139,7	R 22,2	PL24	12,8	
295184	-		A	139,7	L 22,2	PL24	12,8	
295226	-		A	130,2	L 15,9	PL18	12,8	
295334	-		A	152,4/177,8	-	PL 30	16,07	
295388	-		A	139,7	L 12,7	PL18	12,8	
295389	-		A	139,7	R 12,7	PL18	12,8	
295407	-		A	165,1	R 38,1	PL20	12,8	
295408	-		A	165,1	L 38,1	PL20	12,8	
295468	-		A	108/133,4	-	PL 20	12,8	
295494	-		A	139,7	-	PL20	14,0	
295567	-	3	A	165	-	PL30	16,1	

Key:

- Preferred Product



Part Number	Type No.	Fig.	Jaw Width [mm/"]	Pin Dia. [mm]	Thread	
1185157	-	1	14,7mm	12,5	M16x1,5	
1188851	-	1	14,7mm	13,85	5/8" UNF	
1189067	-	1	14,5mm	13,77/13,89	M16x1,5	
11M018M	-	1	14,5mm	14,0	M16x1,5	
205948	-	1	9/16"	12,5	1/2" UNF	
228790	-	1	9/16"	12,5	5/8" UNF	
228791	-	1	9/16"	12,5	5/8" UNF	
228801	-	1	9/16"	16,0	5/8" UNF	
267086	-	1	15,2mm	16,0	M16x1,5	
269700	-	1	14,7mm	16,0	M14x1,5	
272917	-	1	14,7mm	12,5	M16x1,5	
274520	-	1	14,7mm	13,77/13,89	5/8" UNF	
274949	-	1	14,7mm	13,77/13,89	5/8" UNF	
295277	-	1	9/16"	15,7	5/8" UNF	
295278	-	1	14,7mm	12,5	5/8" UNF	
295517	-	1	14,7mm	13,85	M16x1,5	
295518	-	1	14,7mm	13,85	M14x1,5	
454448	-	1				
AC1003	-	1				
B238661	-	1				
EF1AK	-	1	14,15mm	14,0	M16x1,5	
II37099	-	1				
SEB00536	-	1				
SEB01314	-	1				
SEB01315	-	1	14,5mm	14,0	M16x1,5	
SEB01316	-	1	14,5mm	14,0	M16x1,5	
Z0040021	-	1				
Z0040022	-	1				

39. Air Disc Brakes



39.1 Air Disc Brakes

Key:

- A** Brake type: Radial (R), Axial (A)
- B** Angle of Actuator centre line to axis of axle [deg.]
- C** To suit wheel size [inches]
- Preferred Product

Fig. 1



Part Number	Type No.	Fig.	A	B [°]	C ["]	Comment/Key	
131.791	T3700-D	1	A	+10	19,5	Wear sensor: In-pad, Normally closed	
131.790	T3700-I	1	A	+10	19,5	Wear sensor: In-pad, Normally closed	
131.777	T4300-D	1	A	+10	22,5	Wear sensor: In-pad, Normally closed	
131.776	T4300-I	1	A	+10	22,5	Wear sensor: In-pad, Normally closed	

Key:

- A** Brake type: Radial (R), Axial (A)
B Angle of Actuator centre line to axis of axle [deg.]
C To suit wheel size [inches]
D Steel Cap fitted (S)
• Preferred Product






Part Number	Type No.	Fig.	A	B [°]	C ["]	D	
K002874	SB6400RC		A	+5	19,5	S	
K002923	SB6401RC		A	+15	19,5	S	
K002915	SB6403RC		A	+5	19,5	S	
K002878	SB6404RC		A	+5	19,5	S	
K002919	SB6408RC		A	+5	19,5	S	
K002875	SB6410RC		A	+5	19,5	S	
K002924	SB6411RC		A	+15	19,5	S	
K002916	SB6413RC		A	+5	19,5	S	
K002879	SB6414RC		A	+5	19,5	S	
K002920	SB6418RC		A	+5	19,5	S	
K002759	SB7405RC		A	0	22,5	S	
K002783	SB7408RC		A	0	22,5	S	
K002785	SB7409RC		A	0	22,5	S	
K002760	SB7415RC		A	0	22,5	S	
K002784	SB7418RC		A	0	22,5	S	
K002786	SB7419RC		A	0	22,5	S	
K002793	SB7420RC		A	-12	22,5	S	
K002789	SB7421RC		A	+12	22,5	S	
K003386	SB7423RC		A	0	22,5	S	
K002794	SB7430RC		A	-12	22,5	S	
K002790	SB7431RC		A	+12	22,5	S	
K003387	SB7433RC		A	0	22,5	S	
K002962	SB7450RC		R	+93	22,5	S	
K002964	SB7451RC		R	+93	22,5	S	
K002966	SB7452RC		R	+86	22,5	S	
K002968	SB7453RC		R	+86	22,5	S	
K003192	SB7455RC		R	+86	22,5	S	
K002963	SB7460RC		R	+93	22,5	S	
K002965	SB7461RC		R	+93	22,5	S	
K002967	SB7462RC		R	+86	22,5	S	
K002969	SB7463RC		R	+86	22,5	S	
K003193	SB7465RC		R	+86	22,5	S	
K004570	SN5005RC		A	+12	17,5	S	
K004572	SN5006RC		A	+12	17,5	S	
K004571	SN5015RC		A	+12	17,5	S	
K004573	SN5016RC		A	+12	17,5	S	
K003779	SN6573RC		A	+5	19,5	S	
K003789	SN6554RC		A	0	19,5	S	
K003825	SN6555RC		A	+5	19,5	S	
K003791	SN6557RC		A	+5	19,5	S	
K003793	SN6558RC		A	+5	19,5	S	
K003780	SN6563RC		A	+5	19,5	S	
K003790	SN6564RC		A	0	19,5	S	
K003826	SN6565RC		A	+5	19,5	S	

Part Number	Type No.	Fig.	A	B [°]	C ["]	D	
K003792	SN6567RC		A	+5	19,5	S	
K003794	SN6568RC		A	+5	19,5	S	
K003781	SN7185RC		A	-12	22,5	S	
K003783	SN7186RC		A	0	22,5	S	
K003785	SN7187RC		A	0	22,5	S	
K003787	SN7188RC		A	0	22,5	S	
K003795	SN7189RC		A	-12	22,5	S	
K003782	SN7195RC		A	-12	22,5	S	
K003784	SN7196RC		A	0	22,5	S	
K003786	SN7197RC		A	0	22,5	S	
K003788	SN7198RC		A	0	22,5	S	
K003796	SN7199RC		A	-12	22,5	S	
K003797	SN7200RC		A	-12	22,5	S	
K003799	SN7201RC		A	-12	22,5	S	
K003801	SN7202RC		A	-12	22,5	S	
K003803	SN7203RC		A	0	22,5	S	
K003805	SN7204RC		A	0	22,5	S	
K003807	SN7205RC		A	0	22,5	S	
K003809	SN7206RC		A	0	22,5	S	
K003811	SN7207RC		A	0	22,5	S	
K003813	SN7208RC		A	0	22,5	S	
K003815	SN7209RC		A	+8	22,5	S	
K003798	SN7210RC		A	-12	22,5	S	
K003800	SN7211RC		A	-12	22,5	S	
K003802	SN7212RC		A	-12	22,5	S	
K003804	SN7213RC		A	0	22,5	S	
K003806	SN7214RC		A	0	22,5	S	
K003808	SN7215RC		A	0	22,5	S	
K003810	SN7216RC		A	0	22,5	S	
K003812	SN7217RC		A	0	22,5	S	
K003814	SN7218RC		A	0	22,5	S	
K003816	SN7219RC		A	+8	22,5	S	
K004578	SN7241RC		A	-12	22,5	S	
K004580	SN7242RC		A	-12	22,5	S	
K004579	SN7251RC		A	-12	22,5	S	
K004581	SN7252RC		A	-12	22,5	S	

Key:

B { Number of mounting holes
 Hole diameter [mm] or thread
D Outside Diameter [mm]
L(k) Cooling Channel Width
S(min) Thickness minimum [mm]
 • Preferred Product

S(new) Thickness new [mm]
T(i) Inside Diameter [mm]
T(k) Mounting hole circle diameter [mm]
T(t) Overall Width [mm]
X With Studs (S)

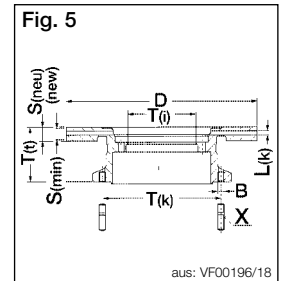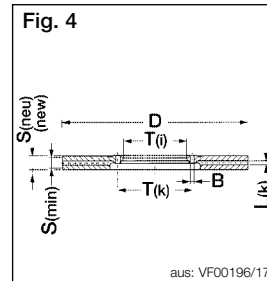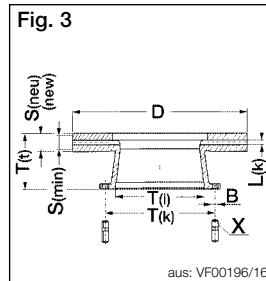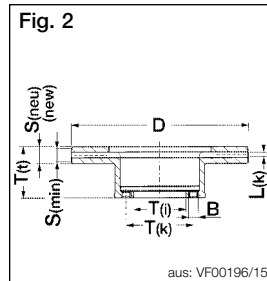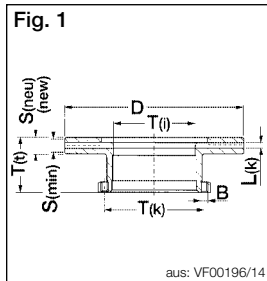

Part Number	Type No.	Fig.	D [mm]	T(t) [mm]	T(k) [mm]	T(i) [mm]	S(new) [mm]	S(min) [mm]	L(k) [mm]	B	X
350103	-	1	396	119	215	192	48	38	17	10 x M16x1,5	-
350991	-	1	315	154,5	205	138	35	25	13	6 x Ø18	-
351032	-	1	410	120	185	162	48	38	17	12 x M16x1,5	-
351096	-	3	315	148,5	245	138,0	35	25	13	6 x Ø18,5	-
351605	-	1	406	175	215	176	48	38	17	10 x M16x1,5	-
352281	-	2	460	119	195	170,0	48	38	17	10 x M16x2,0	-
352327	-	1	315	153,2	205	140	35	25	13	6 x Ø18,1	-
II304180061	-	2	335	90,5	120	91,5	34	28	14	10 x Ø14,5	-
II304190061	-	1	335	111	177	142	34	28	14	8 x M12x1,5	-
II306760061	-	2	377	134	138	105,5	45	37	12	14 x Ø14,4	-
II306770061	-	1	377	138,5	196	166	45	37	12	8 x Ø14,5	-
II35535	-	1	430	136	220	190	45	37		10 x M16x1,5	-
II371910061	-	1	430	131	235	203	45	37	12	10 x M16x1,5	-
II37257	-	1	430	131	245	189	45	37	12	20 x M12x1,5	-
II37415	-	1	430	136	220	194	45	37	12	10 x M16x1,5	-
II376380061	-	1	430	132,5	238	197	45	37	12	10 x M14x1,5	-
II37651	-	1	377	128	195	160	45	37		10 x M14x1,5	-
II376530061	-	1	430	131	235	200	45	38	12	10 x M16x1,5	-
II37654	-	3	436	138,5	240	210	45	37	12	12 x M16x2,0	S
II377830061	-	2	430	140,5	168	131	45	37	12	12 x Ø19,0	-
II37784	-	2	432	130	168	131	45	37		12 x Ø19/3 x M12x1,5	-
II379830061	-	1	430	159,5	335	290	45	37	12	10 x Ø23	-
II37986	-	1	430	179,7	249,5	163,4	45	37	12	10 x 5/8-18	-
II37987	-	1	430	179,7	249,5	163,4	45	37	-	10 x 5/8-18	-
II37988	-	1	432	135	235	186	45	37	12	10 x M16x1,5	-
II38335F	-	1	430	132,5	238	203	45			10 x M14x1,5	-
II38628F	-	1	377	138,5	196	163,43	45			8 x M14x1,5	-
II39023F	-	3	304	128,5	205	120,9	30	27,75	14	6 x Ø18,2	-
II39024F	-	5	290	153,5	205	80	25	23	9	6 x M18x1,5	S
II39025F	-	1	324	91	140	122,5	30	26	14	6 x M12x1,5	-
II39026F	-	1	304	91	140	122,5	30	26	14	6 x M12x1,5	-
II39027F	-	1	324	102	158	138	30	24	10,5	10 x M14x1,5	-
II39028F	-	1	322	90	154	132	30	28	10,5	8 x M14x2,0	-
II39029F	-	1	322	90	154	132	30	28	10,5	6 x M14x2,0	-

Part Number	Type No.	Fig.	D [mm]	T(t) [mm]	T(k) [mm]	T(i) [mm]	S(new) [mm]	S(min) [mm]	L(k) [mm]	B	X
II39081F	-	1	312	137	155	133	30	27		12 x M12x1,75	-
II39082F	-	5	267	147,5	170	58	14	12,8		6 x M18x1,5	S
II39083F	-	4	374	22	108	80,3	22	25,5		10 x Ø16,7	-
II39084F	-	2	417	80	186	157	30	27	10,5	10 x Ø18,5	-
II39085F	-	2	350	73	165	145,3	30	27	10,5	16 x Ø12,5	-
II39087F	-	2	417	67	186	159	28	29,5	9,5	16 x Ø18,5	-
II39088F	-	3	322	126	205	148	30	27	14	6 x Ø21,0	-
II39089F	-	1	354	83	165	142	40			16 x Ø12,7	
II39090F	-	1	315	121,7	138	119	26	24	10,5	10 x M12x1,75	-
II39091F	-	5	280	136	170	56	16	14,5		6 x M18x1,5	S
II39092F	-	5	290	105,1	170	68	22	19		6 x M18x1,5	S
II39093F	-	2	289	73,5	108	84	22	19		8 x Ø10,55	-
II39094F	-	3	370	195	275	150	45	41	14	8 x M20x1,5	S
II39095F	-	3	370	181,5	275	150	45	41	14	8 x M22x1,5	S
II39096F	-	3	322	134	275	136,9	30	27,75	14	8 x Ø20,2	-
II39098F	-	1	430	102	195	170	50	46	12	12 x M16x2,0	-
II39280F	-	2	377	112	144	117	45	37	12	10 x Ø14,75	-
II39284F	-	5	267	105	170	58,2	14,2	12,8		6 x M18x1,5	S
II39285F	-	4	374	22	108	60,3	22	20,5		10 x Ø16,7	-
II39286F	-	2	303	55	143	122	28	25	9,5	8 x Ø12,5	-
II39287F	-	1	412	45	188	160	42	40		12 x Ø11,5/3 x M10x1,25	-
II39288F	-	3	315	118,5	205	160	26	23	9	6 x M18x1,5	S
II39289F	-	1	438	135	235	186	45	35	12	10 x M16x1,5	-
II39290F	-	1	377	128	195	160	45	38		10 x M14x1,5	-
II39541F	-	4	432	-	-	217	45	37	12	10-Spline	-
K000332	-	1	430	150	249,5	207	45	37	12	10 x 5/8"-II UNC-2B	-
K000758	-	1	430	138,3	249,5	207	45	37	12	10 x 5/8"-II UNC-2B	-
K000810	-	1	430	131	337	208	45	37	12	10 x M16x1,5	-
K000811	-	2	276	44	120	102	24	22		10 x Ø10,6	-
K000812	-	2	400	90,15	197	175	42	36		12 x Ø12,4	-
K000813	-	2	290	53	110	80	26	23		9 x Ø12,5	-
K000814	-	1	306	114,6	215	178,3	22	19	-	6 x M10x1,5	-
Z000557	-	2	430	104,7	165	135	45	37	12	14 x Ø14,75	-
Z001631	-	2	276	72,5	118	73	22	19		5 x Ø15,65	-
Z001632	-	2	276	66,5	118	73	16	13		5 x Ø15,65	-
Z001633	-	2	276	66,5	118	73	16	13		5 x Ø15,65	-
Z001634	-	2	290	42,5	120	102	26	23		10 x Ø10,8	-
Z001635	-	2	290	42,5	120	102,1	22	19		10 x Ø10,8	-
Z001636	-	2	290	73,5	132	120	22	19		8 x Ø10,8	-
Z001637	-	2	437	96,5	165	131	45	41		10 x Ø17,0	-
Z001638	-	1	350	16	124	98	16	14,5		10 x Ø11,1	-
Z002016	-	2	377	134	138	105,5	45	37	12	14 x Ø14,4	-
Z002017	-	1	377	138,5	196	166	45	37	12	8 x Ø14,5	-
Z003755	-	2	430	130	168	131	45	37	12	12 x Ø19,0	-
Z003890	-	4	430	-	236	180	45	37	12	-	-
Z004338	-	2	377	140,5	168	131	45	37	12	12 x Ø19,0	-
Z006407	-	2	430	114,7	165	135	45	37	12	14 x Ø14,75	-



Air Disc Brake Tool Kit - SB Calipers

Part Number	Type No.	Fig.	Contents
<i>II37951004</i>	ZB9032	1	II19252 - Press-In Tool for Tappet and Boot Assembly II19253 - Pull-In Tool for Inner Boot II19254 - Pull-In/Out Tool for Brass Bush II32202 - Wedged Fork for removal of Tappet and Boot Assembly II36797 - Grooving Tool for Brass Bush C16352EN Service Manual KBP2060/1 Video

Air Disc Brake Tool Kit - SN Calipers

Part Number	Type No.	Fig.	Contents
<i>K000469</i>	ZB9036	2	II32202 - Wedged Fork for removal of Tappet and Boot Assembly Z004197 - Press-In Tool for Cover Z004361 - Pull-In Tool for Inner Seal Z003934 - Press-In Tool for Cap Z004357 - Pull-In Tool for Inner Boot Z004354 - Pull-In/Out Tool including Grooving Tool for Brass Bush Z004198 - Pull-In/Out Tool for Rubber Bush Z004190 - Press-In Tool for Tappet and Boot Assembly K001262 Service Manual Z004368 Video


Test Case

Part Number	Type No.	Fig.	Contents
<i>I97266</i>	ZB1110	3	Pressure Gauges

40. Solenoid Valves

Key:

- A Voltage
- B Normally open (N/O), Normally closed (N/C)
- Preferred Product

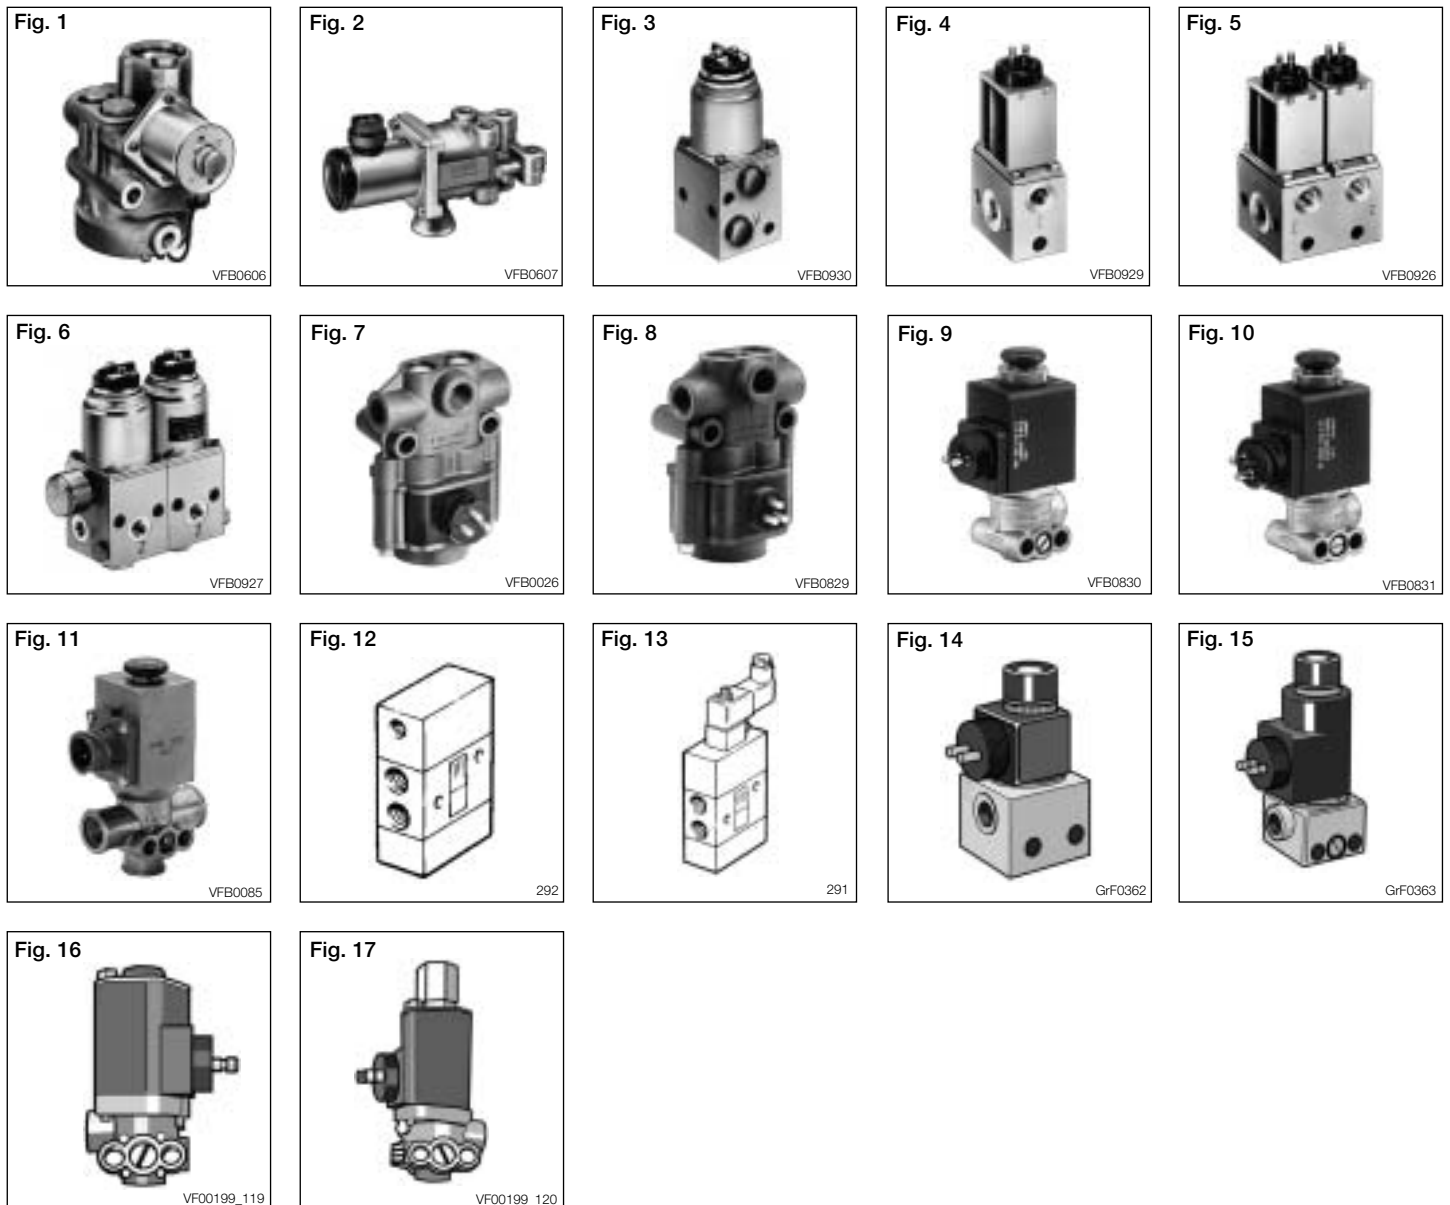

Part Number	Type No.	Fig.	Port Size	A [V]	B	
0481500007000	-	1	M12x1,5	24	1)	
0481500101000	-	2	M12x1,5	24	1)	
• 0481500102000	-	2	M12x1,5	24	1)	
0481500103000	-	2	M12x1,5	24	1)	
0481500104000	-	2	M12x1,5	24	1)	
0481500105000	-		M12x1,5	24	1)	
0481503011000	-	3	M12x1,5	24	N/C	
0481503018000	-	4	M12x1,5	24	N/C	
0481503019000	-	5	M12x1,5	24	N/C	
0481503023000	-	4	M12x1,5	24	N/C	
0481510004000	-	6	M12x1,5	24	N/C	
0481511001000	-	7	M16x1,5	24	N/C	

Part Number	Type No.	Fig.	Port Size	A [V]	B	
0481511002000	-	8	M16x1,5	24	N/C	
0481511004000	-	7	M16x1,5	24	N/C	
0481511101000	-	9	M12x1,5	24	N/C	
0481511102000	-	10	M12x1,5	24	N/C	
0481511105000	-	11	M16x1,5	24	N/C	
• 0481511106000	-	11	M16x1,5	24	N/C	
0486206101000	-		1/4"-18 NPT	12	N/C	
0486206102000	-		1/4"-18 NPT	24	N/C	
0486206103000	-		M12x1,5	24	N/C	
0486206106000	-		1/4"-18 NPT	24	N/C	
0491051001000	-		Ø 5 mm	24	N/C	
1111661000	-		M12x1,5	24	N/C	
1194130	-	12	M14&M10	24	N/C	
1194131	-	12	1/4"&1/8"	24	N/C	
1194132	-	13	1/4"&1/8"	24	N/C	
I93543	AE9126	14	M12x1,5	24	N/C	
CPE203C	-		M12x1,5	24	N/C	
CPE203CS	-		M12x1,5	24	N/C	
CPE205B	-		M12x1,5	24	N/C	
CPE205BS	-		M12x1,5	24	N/C	
CPE2GA	-		M12x1,25	24	N/C	
CPE2H	-		M12x1,0	24	N/C	
DPE1FB	-		M12x1,0	24	N/C	
DPE1GB	-		M12x1,0	24	N/C	
II32611	EA1152	15	M12x1,0	24	N/C	
EB018972	-		M12x1,5	24	N/C	
EDP13A	-		M10x1,25	24	N/C	
EDP13B	-		M10x1,25	24	N/C	
EDP21A	-		M12x1,0	24	N/C	
EDP22A	-		M12x1,0	24	N/C	
EDP22B	-		M12x1,25	24	N/C	
EDP22C	-		M12x1,5	24	N/C	
EDP22D	-		M12x1,5	24	N/C	
EDP25AA	-	16	M12x1,5	24	N/C	
EDP25AAX	-	16	M12x1,5	24	N/C	
EDP26AA	-	17	M12x1,5	24	N/O	
EDP26AAX	-	17	M12x1,5	24	N/O	
LS2510	-		M12x1,5	24	N/O	
I4585089024	-					
I63411024	-					
I85094024	-					

¹⁾ At each electrical pulse, the active delivery port is exhausted and the alternate delivery port is opened

41. Silencers



Key:

- Preferred Product



Part Number	Type No.	Fig.	Connection	
0484210001000	-	1	M16x1,5	
0484210002000	-	1	M16x1,5	
0484210004000	-	2	Ø 14mm	
0484210005000	-	3	Snap-On	
0484210006000	-	1	M16x1,5	
0484210008000	-	4	Snap-On	
0484210009000	-	5	Snap-On	
0484210010000	-	2	Ø 8mm	
0484210015000	-	6	Snap-On	
0484210016000	-	4	Snap-On	
0484210017000	-	7	Snap-On	
0484210018000	-		M22x1,5	
1188230	-	8	3/8" BSP	
1188231	-	8	1/2" BSP	
1188906	-	8	1/2" BSP	
1188907	-	8	1/2" BSP	
1188975	-	8	1/2" BSP	
269760SP	-	9	M6 Screw	
KW4069/1	-	10	1/2" BSP	
KW4069/2	-	10	3/8" BSP	
KW4069/5	-	10	M22x1,5	
SIL68ASP	-	11	Snap-On	



Part Number	Type No.	Fig.	Connection	
SIL68B	-	12	M22x1,5	
SIL68BK	-	12	M22x1,5	
<i>I78074</i>	ZB3150	1	M22x1,5	
<i>I92999</i>	ZB3163	11	Snap-On	

42. Switches



Key:

- Preferred Product



42.1 Pressure Sensors

Part Number	Type No.	Fig.	Port Size	Connection	Voltage [V] Max.	Pressure [bar]
0484205006000	-	1	M16x1,5	DIN72535	5	
IB20AA	-		M20x1,5	Double Lucar	30	4,0
IB20BA	-		M20x1,5	Double Lucar	30	5,5
IB20CA	-		M20x1,5	Double Lucar	30	6,4
IB20DA	-		M20x1,5	Double Lucar	30	5,0
IB20EA	-		M20x1,5	Double Lucar	30	5,8
IB20FA	-		M20x1,5	Double Lucar	30	4,5
IB20HA	-		M20x1,5	Double Lucar	30	2,3
IB20LA	-		M20x1,5	Double Lucar	30	7,3
IB20MA	-		M20x1,5	Double Lucar	30	6,8
IB20QA	-		M20x1,5	Double Lucar	30	1,5
IB6A	-		-	Single Lucar	30	4,0
IB8B	-		M20x1,5	Single Lucar	30	6,4
IB8D	-		M12x1,5	Single Lucar	30	
IB9AY	-		M20x1,5	Single Lucar	30	4,0
IB9BY	-		M20x1,5	Single Lucar	30	5,5
IB9CY	-		M20x1,5	Single Lucar	30	6,4
IB9DY	-		M20x1,5	Single Lucar	30	5,0
IB9EY	-		M20x1,5	Single Lucar	30	5,8
IB9FY	-		M20x1,5	Single Lucar	30	4,5
IB9HY	-		M20x1,5	Single Lucar	30	2,3
IB9MY	-		M20x1,5	Single Lucar	30	6,8
IB9QY	-		M20x1,5	Single Lucar	30	1,5

42.2 Low Pressure Indicators

Part Number	Type No.	Fig.	Port Size	Connection	Pressure [bar]
1111308000	-		M20x1,5	Ø 4mm x13,5	4,8
1111316000	-		G1/4"J	M4x0,70	4,8
1111319000	-		M20x1,5	M4x0,70	6,1
1111364000	-		G3/8"J	M4x0,70	4,4
267037	-	2	M12x1,5	Lucar & Screw	5,0
272295	-	2	M12x1,5	Lucar & Screw	5,5
295473	-	2	1/4" NPTF	Lucar & Screw	4,1
295474	-	2	1/4" NPTF	Lucar & Screw	5,1
295476	-	2	1/4" NPTF	Lucar & Screw	5,4
295491	-	2	1/4" NPTF	Lucar & Screw	4,9

Part Number	Type No.	Fig.	Port Size	Connection	Pressure [bar]	
INT1B	-			Single Lucar		
INT2A	-			Double Lucar		
INT30A	-		M26x1,5	Single Lucar		
INT36A	-		M22x1,5	Double Lucar		
INT36B	-		M22x1,5	Double Lucar		
INT46A	-		M20x1,5	Double Lucar	6,8	
INT46B	-		M20x1,5	Double Lucar	5,5	
INT46D	-		M20x1,5	Double Lucar	1,5	
INT46E	-		M20x1,5	Double Lucar	5,8	
INT46F	-		M20x1,5	Double Lucar	0,8	
INT46G	-		M20x1,5	Double Lucar	3,0	
INT51A	-			Double Lucar		
I71206	WE2131		M12x1,5	Double Lucar	0,3	
I94846	WE2135					
II14936	WE2137	3				
I92570	WE2207					

42.3 Stop Light Switches

Part Number	Type No.	Fig.	Thread Size	Connection	Pressure [bar]	
1111313000	-		M22x1,5	Lucar	0,3	
1111324000	-		¹⁾	Lucar	0,2	
274746	-	4	1/4 NPTF	Lucar & Screw	0,35	
223220	-	4	1/4 NPTF	Lucar		
I71200	-					




¹⁾ Push Fitting

43. Safety Valves



Key:

- Preferred Product





Part Number	Type No.	Fig.	Port Size	Pressure [bar]	
109914	-				
1113330000	-		M20x1,5	9,0	
1113331000	-		M20x1,5	10,0	
1113336000	-		M16x1,5	20,0	
284142	-		1/4" NPTF	10,0	
I33540	AE7104				
K000701	AE7110				
I84406	DR5117	1			
I84414	DR5118	1	M26x1,5	15,0	
I89684	DR5121	1	M22x1,5	10,0	
I94158	DR5122	1			
I97489	DR5124	1			
I99812	DR5125	1	M26x1,5	17,0	
KX1729/1	-	2	M16x1,5	9,3	
KX1729/2	-	2	M16x1,5	10,3	
KX1729/3	-	2	M16x1,5	10,7	
KX1729/4	-	2	M16x1,5	13,5	
KX1729/5	-	2	M16x1,5	12,9	
KX175/1	-	2	1/4" NPTF	11,0	
KX175/4	-	2	1/4" NPTF	8,6	
KX175/5	-	2	1/4" NPTF	9,3	
KX175/6	-	2	1/4" NPTF	14,06	
KX2073/10	-	3	1/4" NPTF	12,5	
KX2073/13	-	3	1/4" NPTF	14,0	
KX2073/4	-	3	1/4" NPTF	9,5	
KX2073/7	-	3	1/4" NPTF	11,0	
I73623	SIV100K				
I67981	SIV-10K				
I85830	SIV10L				
SP463/5	-				
VA2A	-		M16x1,5	8,5	

44. Test Connectors

Key:

- Preferred Product



Part Number	Type No.	Fig.	Thread Size	
0484204001000	-	1	M16x1,5	
0484204002000	-	1	M16x1,5	
365.0716.5	-			
365.0722.5	-			
365.0916.5	-			
365.0922.5	-			
443612001005	-			
443612001006	-			
443612001007	-			
443612001008	-			
443612001011	-			
443612001012	-			
465.0716.5	-			
465.0722.5	-			
465.0922.5	-			
465.1712.5	-			
465.1714.5	-			
465.1716.5	-			
465.1718.5	-			
465.1722.5	-			
465.1814.5	-			
465.1816.5	-			
465.1822.5	-			
465.2082.5	-			
465.9912.2	-			
AC784B	-	2	M16x1,5	
AC784D	-	2	M16x1,5	
II38879F	-			
KW3405/1	-	2	1/4" NPTF	
KW3405/2	-	2	3/8" NPTF	
KW4282/2	-	2	M16x1,5	
RA7776	-			
I34362	ZB1209	3	M22x1,5	
I77259	ZB1217	4	M22x1,5	
SEB00253	ZB1218	4	M16x1,5	
SEB00254	ZB1219	4	M22x1,5	
SEB00255	ZB1220	5	M16x1,5	

45. Tyre Inflator Valves



Key:

- Preferred Product

Fig. 1


















Part Number	Type No.	Fig.	Thread Size	
I43874	ZB3104	1	M22&M16x1,5	
I71613	ZB3108	1	M22&M16x1,5	

46. Levelling Valves











Key:

CB	Cross Block	R	Mounting - Right
CT	Cross throttling feature	RL	Accommodates Round Lever
E	Secondary Exhaust	S	With Ball Stud
FL	Accommodates Flat Lever		
FR	Accommodates Flat or Round Lever		
H	Mounting - Horizontal	A	Datum adjustment [deg.]
L	Mounting - Left	B	Height limitation [deg.]
N1/N2/N3/G1/G2/G3	Flow characteristic number	C	Lever length [mm]
/Q1/Q2/Q3/S1/S2/S3			
/S4/S5/S6/S7			
•			Preferred Product

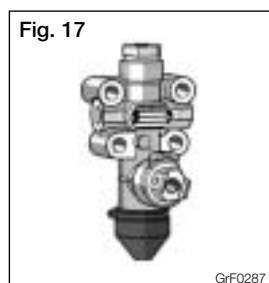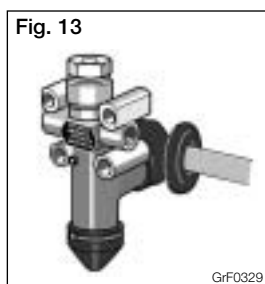











Flow characteristic number

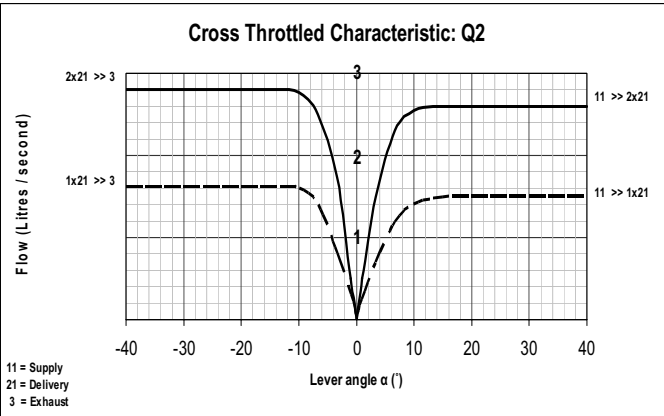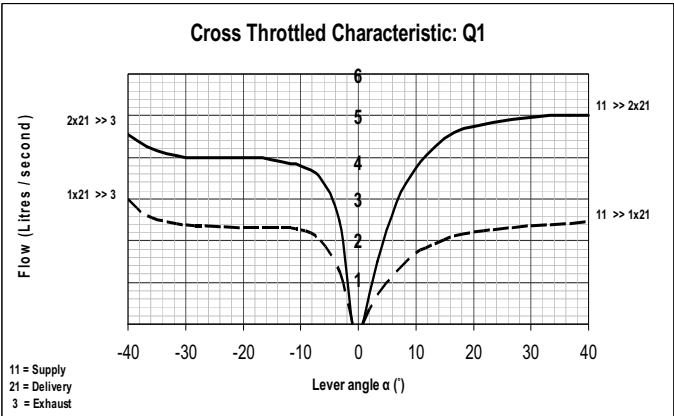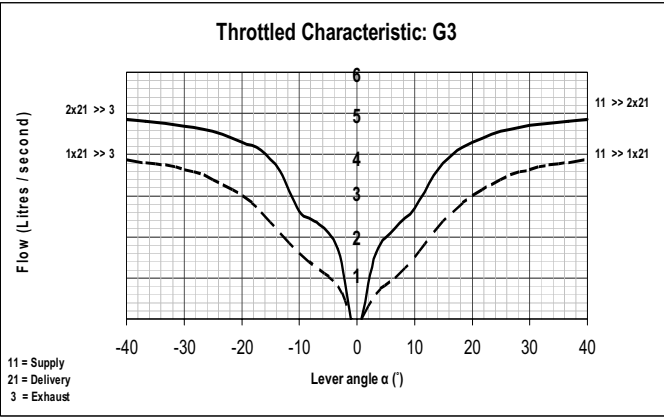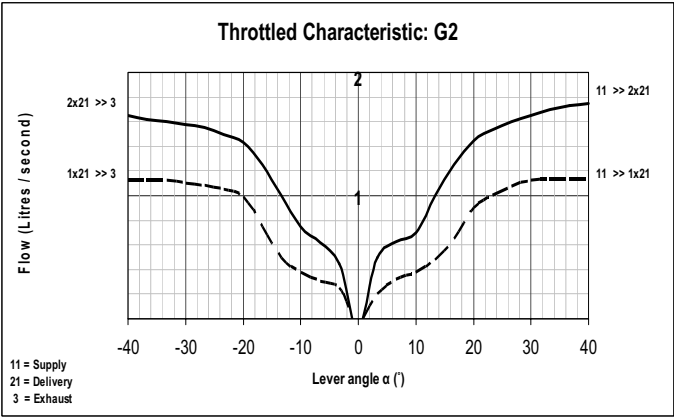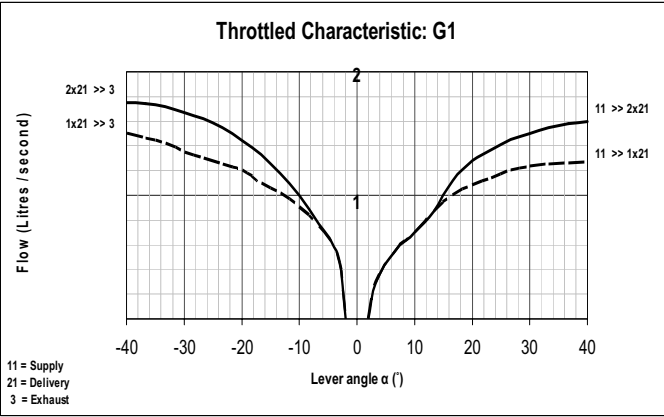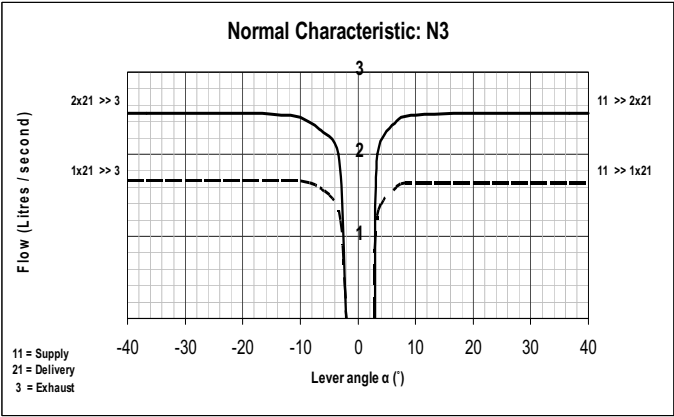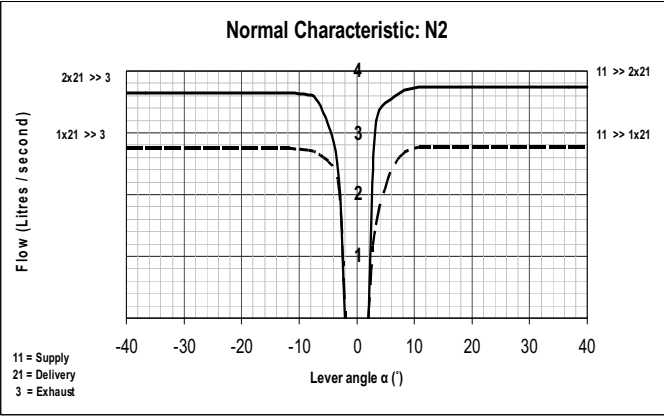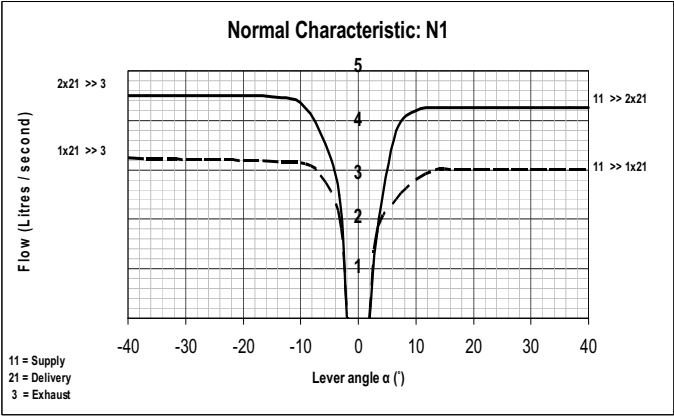

Flow characteristic number

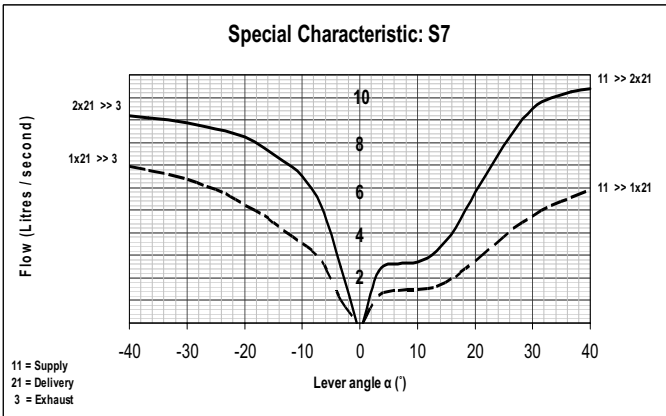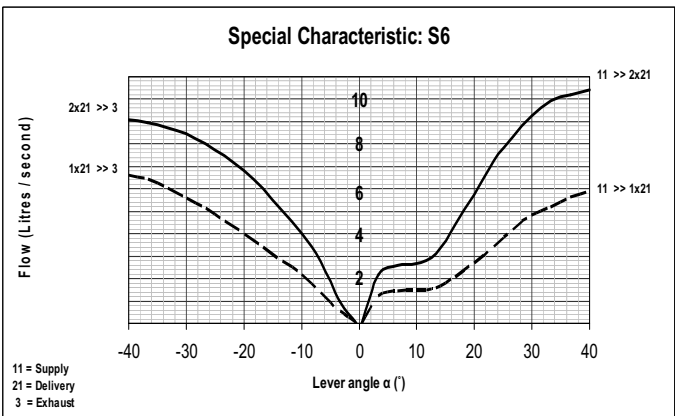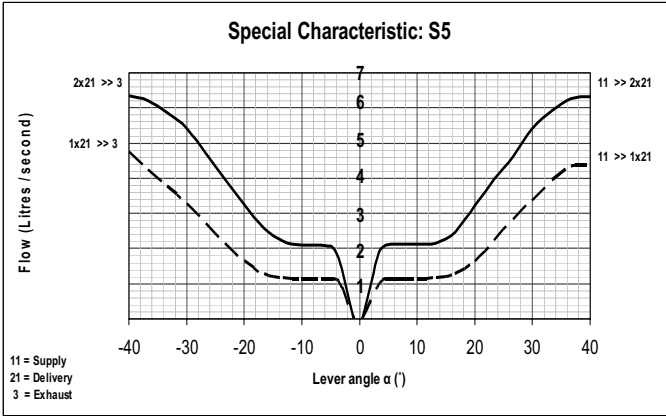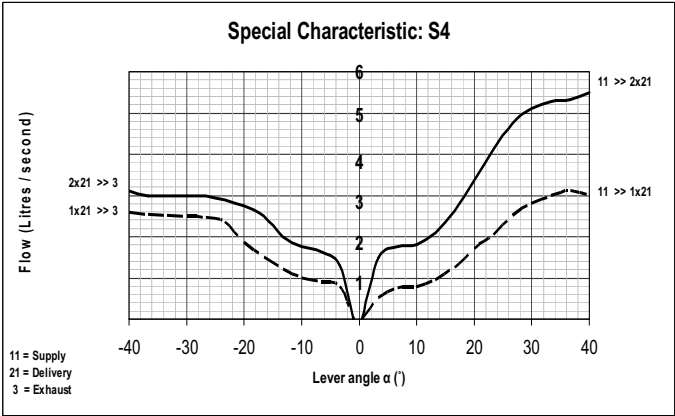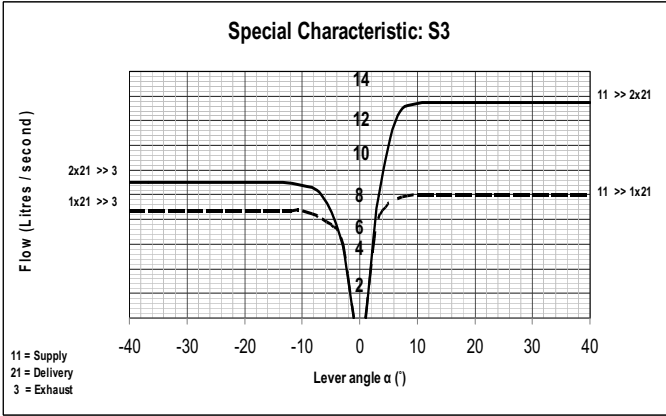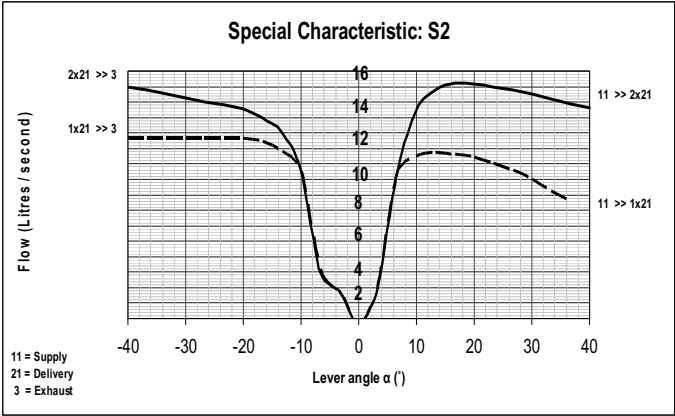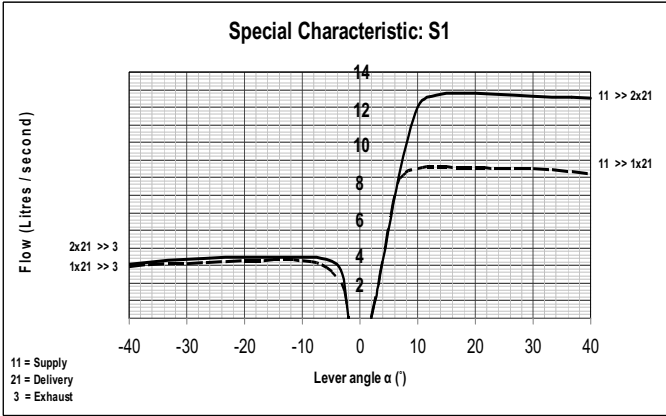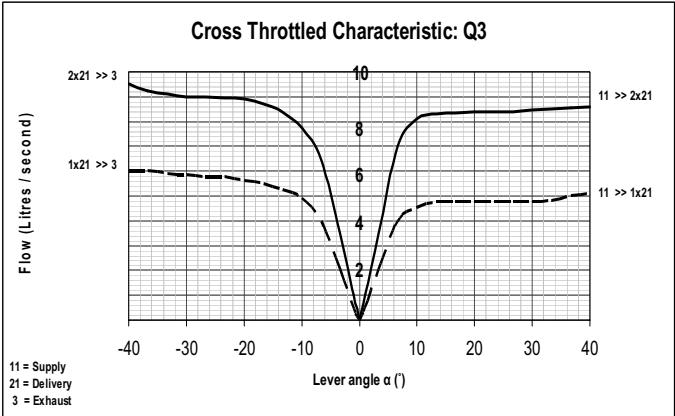

Part Number	Type No.	Fig.	Port Sizes Supply/Delivery	Control	A [°]	B [°]	C [mm]	Comment/Key
0500004201000	-	1	Ø 6mm				200	RL
0500004203000	-	2	Ø 6mm				200	RL
0500004204000	-							
0500005001000	-	3	M12x1,5				175	CT, FL,S
0500005002000	-	3	M12x1,5				175	CT, FL,S
0500005003000	-	3	M12x1,5				175	CT, FL
0500005006000	-	4	M12x1,5				90	CT, FL
0500005007000	-	4	M12x1,5				90	CT, FL
0500005011000	-	4	M12x1,5				90	CT, FL
0500005012000	-	4	M12x1,5				90	CT, FL
0500005017000	-	3						
0500005018000	-	3						
0500005101000	-	3	M12x1,5				175	CB, FL,S
0500005102000	-	3	M12x1,5				175	CB, FL,S
0500005104000	-	4	M12x1,5				90	CB, FL
0500005105000	-	4	M12x1,5				90	CB, FL
1111730000	-		M12x1,0				160	FL
1111731000	-		M12x1,5				160	CT, FL
1111762000	-		M12x1,5				75	CT, FL
1111790000	-		M12x1,0				184	CT, FL
1111792000	-		M12x1,5				170	CT, FL
1111793000	-		M12x1,5				170	CT, FL
I90706	SV1200	5	M12x1,5				160	N1, FL
I90707	SV1201	5	M12x1,5				160	N1, FL
• I90708	SV1202	5	M12x1,5				160	N1, FL
• I41333	SV1219	5						
I83699	SV1260	6	M12x1,5				210	N2, FL
• I58921	SV1261	5	M12x1,5				200	N2, FL
• I80086	SV1269	7	M12x1,5					G2, FL
• I83828	SV1279	6						
I69324	SV1280	8				42°		N1, FL
• I80093	SV1280	8	M12&M16x1,5			42°		G2, FL
• I80095	SV1281	8	M12&M16x1,5	M12x1,5	10°	42°		G2, FL
• I85247	SV1287	9	M12x1,5	M12x1,5	16,5°			G2, FL
• II17813	SV1288	6	M12x1,5					Q1, CT, FL, H
• I80091	SV1294	6	M12x1,5	M12x1,5				N2, FL
• I85698	SV1295	10	M12x1,5	M12x1,5	19,5°			N2, FL
• I83640	SV1296	7	M12x1,5					N2, FL
• II33045	SV1298	9	M12x1,5	M12x1,5	27°			N2, FL
• II33046	SV1299	9	M12x1,5	M12x1,5	27°			S2, FL
• II32763	SV1303	11	M12&M16x1,5	M12x1,5	17,5°	39,5°		E, S3, FL
• I85919	SV1304	7	M12x1,5					S1, FL
I87823	SV1307	12	M12x1,5				max.290	G2, RL
• I82456	SV1310	13	M12x1,5				160	N2, FL
• II17817	SV1313	13						
• I85883	SV1318	10	M12x1,5	M12x1,5	26°		160	N2, FL
• II36108	SV1318	10	M12x1,5	M12x1,5	26°		160	N2, FL
• II18034	SV1321	10	M12x1,5	M12x1,5	26°		160	Q1, CT, FL
• II32764	SV1323	10	M12&M16x1,5	M12x1,5	19,5°			G2, FL
• II18033	SV1325	8	M12&M16x1,5			39°		E, Q2, CT, FL

Part Number	Type No.	Fig.	Port Sizes Supply/Delivery	Control	A [°]	B [°]	C [mm]	Comment/Key
<i>II32765</i>	SV1328	10	M12&M16x1,5					G2, FL
• <i>I92103</i>	SV1329	8	M12&M16x1,5			26°		G2, FL, R
• <i>I92104</i>	SV1330	8	M12&M16x1,5			26°		G2, FL, L
<i>I86887</i>	SV1333	8	M12&M16x1,5	M12x1,5	17,5°	39,5°		E, G2, FL, R
• <i>I86888</i>	SV1334	8	M12&M16x1,5	M12x1,5	17,5°	39,5°		E, G2, FL, L
• <i>I87432</i>	SV1343	8	M12&M16x1,5			42°		E, G2, FL, R
• <i>I87433</i>	SV1344	8	M12&M16x1,5			42°		E, G2, FL, L
• <i>II17814</i>	SV1345	14	M12x1,5					Q2, CT, FL, H
• <i>I87950</i>	SV1350	7	M12x1,5					G2, FL
• <i>I88579</i>	SV1351	10	M12x1,5	M12x1,5	19,5°			N2, FL
• <i>II18035</i>	SV1352	10	M12x1,5	M12x1,5	26°		120	Q1, CT, FL
• <i>I90452</i>	SV1361	13	M12x1,5				120	N3, FL
• <i>II18032</i>	SV1362	13	M12x1,5				120	Q1, CT, FL
• <i>I92567</i>	SV1369	8	M12&M16x1,5			30°	245	N2, FL, L
• <i>I92568</i>	SV1370	6	M12&M16x1,5			30°	245	N2, FL, R
• <i>I92715</i>	SV1371	9	M12x1,5	M12x1,5	16,5°			S2, FL
• <i>I92952</i>	SV1372	15						
• <i>I92995</i>	SV1374	5						
<i>I93422</i>	SV1376	7						
• <i>I93497</i>	SV1377	8						
• <i>I93498</i>	SV1378	8						
<i>II36026</i>	SV1380	9						
<i>II36027</i>	SV1381	9	M12x1,5	M12x1,5	27°			N2, FL
<i>I93512</i>	SV1384	8						
• <i>II17815</i>	SV1385	10	M12x1,5	M12x1,5	15°		237	Q1, CT, FL, H
• <i>I94616</i>	SV1395	10	M12x1,5	M12x1,5	15°		237	Q1, CT, FL, H
• <i>II19425</i>	SV1395	10	M12x1,5				max.285	G3, RL
• <i>K000001</i>	SV1395	15	M12x1,5				max.285	G3
<i>I94622</i>	SV1399	10	M12x1,5	M12x1,5	26°			S4, FL
• <i>II30525000</i>	SV1399	10	M12x1,5	M12x1,5	26°			S4, FL
• <i>I98348</i>	SV1403	8	M12&M16x1,5			42°		E, G3, FL, R
• <i>I98349</i>	SV1404	8	M12&M16x1,5			42°		E, G3, FL, L
• <i>I98289</i>	SV1410	16	M12&M16x1,5			39°	max.290	Q3, CT, RL
<i>I98290</i>	SV1411	17						
• <i>I98292000</i>	SV1412	17						
• <i>K000073</i>	SV1412	17	M12x1,5					S4, FL
• <i>I99630</i>	SV1416	8	M12&M16x1,5			30°		E, G3, FL, R
• <i>I99631</i>	SV1417	8	M12&M16x1,5			30°		E, G3, FL, L
• <i>I99633</i>	SV1418	16	M12x1,5				max.290	Q3, CT, RL
• <i>II17812</i>	SV1419	8	M12&M16x1,5			39°		E, Q2, CT, FL
• <i>II15729</i>	SV1421	8	M12&M16x1,5			29°	195	E, G3, FL, R
• <i>II15730</i>	SV1422	8	M12&M16x1,5			29°	195	E, G3, FL, L
• <i>II16189</i>	SV1425	8	M12&M16x1,5			42°	195	E, G3, FL, R
• <i>II16190</i>	SV1426	8	M12&M16x1,5			42°	195	E, G3, FL, L
• <i>II17810</i>	SV1427	8	M12&M16x1,5			39°	160	Q2, CT, FL, R
• <i>II17811</i>	SV1430	8	M12&M16x1,5			49°	160	Q2, CT, FL, R
• <i>II19085</i>	SV1435	8	M12&M16x1,5			25°	160	E, Q2, CT, FL, R
• <i>II19086</i>	SV1436	8						
• <i>II19087</i>	SV1437	8						
• <i>II30530</i>	SV1440	16	M12&M16x1,5	M12x1,5	12°	25°	max.290	E, Q3, CT, RL

Part Number	Type No.	Fig.	Port Sizes Supply/Delivery	Control	A [°]	B [°]	C [mm]	Comment/Key
• II30531	SV1441	8	M12x1,5	M12x1,5	12°		max.290	Q3, CT, RL
• II32788	SV1442	8						
• II32789	SV1443	8						
• II34439	SV1445	17						
• II34910	SV1447	12						
II36056	SV1455							
• II36088	SV1460		M12x1,5				max.290	S7, FR
• II36101	SV1461							
• II36141	SV1461							
II36114	SV1465	8	M12&M16x1,5	M12x1,5	12°	¹⁾	max.290	E, S7, RL
II36115	SV1466	16	M12&M16x1,5			¹⁾	max.290	E, S7, RL
• II36117	SV1467							
• II36118	SV1468							
• K000069	SV1468							
II36121	SV1470		M12x1,5				max.290	G3, FR
II36123	SV1472		M12x1,5				max.290	N2, FR
• II36169	SV1481							
• II36171	SV1482							
K000367	SV1485	12						
K002647	SV1485	12						
• K001034	SV1486	15						
• K001035	SV1487	15						
• K000264	SV1490	18						
• K000661	SV1491	18						
II36212	-							
• K001885	-							
WC1M583596	-						178	FL





¹⁾ Adjustable: 20°-50°

47. Raise / Lower Valves



Key:

- B Electrical connection Bayonet
- K Electrical connection Kostal
- SP Spring return to 'STOP' feature
- Preferred Product



47.1 Raise / Lower Valves - Mechanical


Part Number	Type No.	Fig.	Port Sizes		Number of		Comment/Key
			Supply	Delivery	Levers	Valve Elements	
• I83153	SV3111	1	M16x1,5	M16x1,5	1	2	
• I86022	SV3113	1	M16x1,5	M16x1,5	1	3	
I86023	SV3114	2	M16x1,5	M16x1,5	2	4	
I86024	SV3115	3	M16x1,5	M16x1,5	1	1	
• I86025	SV3118	4	M16x1,5	M16x1,5	2	3	
• I90969	SV3130	2	M16x1,5	M16x1,5	2	4	
• II36043	SV3133	1	M16x1,5	M16x1,5	1	2	SP
• II36069	SV3161		M16x1,5	M16x1,5	1	1	SP
II36075	SV3162	3	M16x1,5	M16x1,5	1	1	SP
II36076	SV3163		Voss NG12	Voss NG12	1	1	
II36107	SV3164						
• II36145	SV3200	5					
• II36185	SV3204	5	M22x1,5	M16x1,5	1		
II36151	SV3230	5	M22x1,5	M16x1,5			
• II36225	SV3240	5					
• II36226	SV3241	6					
II36241	SV3242	6					
II36243	SV3243	6	M22x1,5	M16x1,5			
• II36152	SV3260	6					
• II36227	SV3273	6	M22x1,5	M16x1,5	1	1	SP
• II36205	SV3293	6					
K002020	SV3293	6					

Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Exhaust		
I92723	SV3156	7	M16x1,5	M12x1,5	M22x1,5	B	
I92700	SV3157	7	Voss NG12	Voss NG8	M22x1,5	K	
I92737	SV3158	7	M16x1,5	M16x1,5	M22x1,5	B	

48. Height Limiting Valves

Key:

- Preferred Product



Part Number	Type No.	Fig.	Port Sizes		Cable Connection		
			Supply	Delivery	Top	Bottom	
• I60496	AE1103	1	M12x1,5	M12x1,5	M8x1,0	M8x1,0	
I83425	AE1122	1	M12x1,5	M12x1,5	M8x1,0	Ø 4,3mm	

49. Adjusting Elements (Datum Level)

- Key:
- Preferred Product



Part Number	Type No.	Fig.	Port Size	Control Pressure	
0504003001000	-	1	M10x1,0	5,5.....10	
0504003003000	-	1			
0504003004000	-	1			

50. Electronic Level Control (ELC) Systems



Key:

- H With Heater
- A Heater Connection
- B Heater Voltage
- C Lever Working Range [Deg.]
- D Permissible Load [W]
- Preferred Product



50.1 ELC Compressors

Part Number	Type No.	Fig.	Connection	Port Size	Voltage [V]	Comment/Key	
0504050001000	-	1	1)	M12x1.5	12V	5 bar Max.	
0504050007000	-	1	2)	M12x1.5	12V	12,5 bar Max.	
0504050008000	-	1	2)	M12x1.5	24V	12,5 bar Max.	
0504050011000	-	1					
K001319	-	1					

50.2 ELC Air Dryers

Part Number	Type No.	Fig.	Port Size	A	B [V]	Comment/Key	
0501100049000	-						
0501100405000	-		M12x1,5	Bajonett 2 pin	12	H	
0501100406000	-		M12x1,5	Bajonett 2 pin	24	H	
0501100407000	-						

Part Number	Type No.	Fig.	Port Sizes			Comment/Key	Electrical Connection	Voltage
			Supply/Delivery	Exhaust	Control			
0501100009000	-	2	M22x1,5	M22x1,5		5)	8)	24V
0501100011000	-	3	M22x1,5	M22x1,5			8)	
0501100012000	-	4	M12x1,5	M12x1,5			8)	12V
0501100017000	-	3	M16x1,5	M16x1,5			8)	24V
0501100018000	-	5	M16x1,5	M16x1,5		4) 5)	8)	24V
0501100029000	-	7	M16x1,5	M16x1,5		5)	9)	24V
0501100030000	-		M16x1,5	M16x1,5		5)	9)	24V
0501100031000	-	7	M16x1,5	M16x1,5			9)	24V
0501100038000	-		M16x1,5	M12x1,5	M16x1,5		9)	24V
0501100040000	-	8	M16x1,5	M16x1,5		6)	9)	24V
0501100041000	-	9	M16x1,5	M16x1,5		4) 5)	9)	24V
0501100052000	-		M16x1,5	M16x1,5		7)	9)	24V
0501100055000	-	7	M16x1,5	3)		7)	9)	24V

50.4 ELC ECUs

Part Number	Type No.	Fig.	Connection	Voltage [V]	Comment/Key	
0504004103000	-	10	10)	12		
0504004106000	-	10	10)	24		
0504004107000	-	10	10)	24	Irisbus	
0504004109000	-	10				
0504004112000	-	10				
0504004113000	-	10				

50.5 Level Sensors

Part Number	Type No.	Fig.	Connection	C [°]	D [W]	Comment/Key	
0504002104000	-	11	11)	40	0,3		
0504002110000	-	11	11)	80	0,3		
0504002112000	-	12	9)	60	0,3		
0504002113000	-	11	9)	40	0,3		
0504002114000	-	11					




¹⁾ 2 Pin Plug AK6127
²⁾ Plug connector 280 Metri-Pack
³⁾ Silencer Fitted
⁴⁾ Kneeling
⁵⁾ Cross Throttling
⁶⁾ Truck Rear Axle
⁷⁾ Lift Axle
⁸⁾ Bayonet, Schlemmer
⁹⁾ DIN 72585
¹⁰⁾ Connection, 35 Pole Blade Terminal
¹¹⁾ Connection, 3pin 4mm Dia, Bayonet 27.4mm Dia.

51. Lift Axle Valves



Key:

- AR Auto - raise
- S With solenoid
- Preferred Product

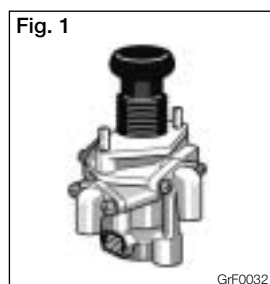

Part Number	Type No.	Fig.	Port Sizes			Comment/Key	
			Supply	Delivery	Control		
SEB00662	AE1124	1	M12x1,5	M12x1,5	M12x1,5		
SEB00667	AE1125	1	M12x1,5	M12x1,5	M12x1,5		
AE1132A	-	2	M12x1,5	M12x1,5	M12x1,5		
SEB01226	AE1135		M12x1,5	M12x1,5	M12x1,5		
SEB01432	AE1137	1	M12x1,5	M12x1,5	M12x1,5		
II36224	AE1141	3	M16x1,5	M16x1,5	¹⁾	S	
• LS1500	-		1/8" NPTF	1/8" NPTF	1/8" NPTF		
LS1500-10	-						
• LS2000	-		1/8" NPTF	1/8" NPTF	1/8" NPTF	AR	
LS2000/1	-						
LS2500	-		1/8" NPTF	1/8" NPTF	1/8" NPTF	AR	
LS3000	-						
VTP1	-		1/8" NPTF	1/8" NPTF	1/8" NPTF		

¹⁾ DIN 72585-A1-2.1

52. Residual Pressure Valves

Key:

- Preferred Product




Part Number	Type No.	Fig.	Port Sizes		Pressure	
			Supply	Delivery	Retention [bar]	
LS1051	-		1/8" NPTF	1/8" NPTF	0,5	

53. Brake Servo Units



Key:

- A Piston Diameter
- B Stroke
- C Push Rod Travel
- Preferred Product



Part Number	Type No.	Fig.	Port Sizes			A	B	C	
			Supply	Delivery	Slave	[mm]	[mm]	[mm]	
0483003017000	-	1	M16x1,5	M16x1,5		165	75	79	
0483003018000	-	1	M16x1,5	M16x1,5		145	75	79	
0483003019000	-	1	M16x1,5	M16x1,5		125	50	54	
0483004201000	-	2	M16x1,5	M16x1,5		150	75	80	
0483004401000	-	3	M16x1,5	M16x1,5		165	75	80	
0483004501000	-	4	M16x1,5	M16x1,5	M14x1,5	165	75	80	
0483004601000	-	3	M16x1,5	M16x1,5		180	75	80	
0483004701000	-	5	M16x1,5	M16x1,5	M14x1,5	180	75	80	

54. Clutch Servos



Key:

A Servo Piston diameter
B Stroke
M Mechanical Output
SS Stroke switch fitted

SAMT With control port for SAMT
• Preferred Product

Fig. 1



VF00199_70

Fig. 2




VF00199_71

Fig. 3



VF00199_72

Fig. 4



VF00199_79

Fig. 5



VF00199_82

Fig. 6



VF00199_73

Fig. 7



VF00199_104

Fig. 8



VF00199_83

Fig. 9



VF00199_76

Fig. 10



VF00199_91

Fig. 11



VF00199_89

Fig. 12



VF00199_105

Fig. 13



VF00199_101

Fig. 14



VF00199_77

Fig. 15



VF00199_100

Fig. 16



VF00199_78

Fig. 17



VF00199_98

Fig. 18



VF00199_92

Fig. 19



VF00199_103

Fig. 20



VF00199_97

Fig. 21



VF00199_85

Fig. 22




VF00199_84

Fig. 23




VF00199_90

Fig. 24




140

Fig. 25




VF00199_126

Fig. 26




VF00199_125

Fig. 27



GrF0231

Fig. 28



GrF0230

Fig. 29



VF00199_129

Fig. 30



VF00199_160



Fig. 31



VF00199_159

Fig. 32




GrF0388

Fig. 33



VF00199_138

Fig. 34



GrF0232

Fig. 35



GrF0211

Fig. 36



GrF0233

Part Number	Type No.	Fig.	Port Sizes		A [mm]	B [mm]	Comment/Key	
			Air Supply	Hyd Supply				
1091858000	-		M14x1,5		101,6	35	SS,M	
1092001000	-		M16x1,5		110	22	SS,M	
1092002000	-		M16x1,5		110	19	SS,M	
622107AM	-	1	M14x1,5	M12x1,5	100		M	
622109AM	-		M14x1,5	M12x1,5	100	53	M	
622110AM	-				100		M	
622190AM	-	2	M16x1,5	M14x1,5	100	70	M	
622199AM	-	3	Voss NG12	M14x1,5	100	70	M	
622502AM	-	4	M16x1,5	M14x1,5	80	85	M	
622504AM	-	5	M16x1,5	M14x1,5	80		M	
624199AM	-	6	Voss NG12	M14x1,5	100	70	M	
624410AM	-	7	M16x1,5	M14x1,5	80	85	M	
625290AM	-	8	M16x1,5	M14x1,5	80	85	M	
625291AM	-				100		M	
625384AM	-	10	M16x1,5	M14x1,5	80	85	M	
625524AM	-	11	M16x1,5	M14x1,5	100	70	M	
625559AM	-	12	M16x1,5	M14x1,5	100	85	M	
625586AM	-	13	M16x1,5	M14x1,5	100	85	M	
625671AM	-	13	M16x1,5	M14x1,5	100	85	M	
626162AM	-	11	M16x1,5	M14x1,5	100	70	M	
626392AM	-	14	M16x1,5	7/16 UNF	80	52	M	
626397AM	-	15	M16x1,5	M14x1,5	80	70	M	
626639AM	-	16	M16x1,5	M14x1,5	95	70	M	
626693AM	-	17	M16x1,5	M14x1,5	80	85	M	
626853AM	-	18	M16x1,5	M14x1,5	80	85	M	
627026AM	-	19	M16x1,5	M14x1,5	80	85	M	
627497AM	-	20	M16x1,5	M14x1,5	80	85	M	
627498AM	-	21	M16x1,5	M14x1,5	80	85	M	
627499AM	-	22	M16x1,5	M14x1,5	80	85	M	
627612AM	-	23	M16x1,5	M14x1,5	100	68	M	
627692AM	-	9	Voss NG12	M14x1,5	100	27	M	
628027AM	-				100		M	

Part Number	Type No.	Fig.	Port Sizes		A [mm]	B [mm]	Comment/Key	
			Air Supply	Hyd Supply				
628036AM	-				100		M	
628258AM	-				100		M	
628259AM	-		M16x1,5	M14x1,5	100	85	M	
628260AM	-		M16x1,5	M14x1,5	100	85	M	
628275AM	-		M16x1,5	M14x1,5	100	85	M	
628276AM	-		M16x1,5	M14x1,5	80	85	M	
628277AM	-		M16x1,5	M14x1,5	80	85	M	
628306AM	-							
628446AM	-				100		M	
628447AM	-				100		M	
628448AM	-		M16x1,5	M14x1,5	100	85	M	
628449AM	-				100		M	
628450AM	-		M16x1,5	M14x1,5	100	85	M	
628492AM	-		M16x1,5	M14x1,5	100	85	M	
628493AM	-		M16x1,5	M14x1,5	100	85	M	
628494AM	-		M16x1,5	M14x1,5	100	85	M	
KY1661/1	-	24	1/4" NPTF	1/4" NPTF	57,2	60,3	M	
KY1988/1	-	24	1/4" NPTF	1/4" NPTF	57,2	60,3	M	
KY1995/3	-	24	1/8" NPTF	M12x1,0	63,5	74	M	
KY1995/4	-	24	1/8" NPTF	M12x1,0	63,5	74	M	
1406643	SF1	25	M12x1,5	M14x1,5	¹⁾	40	M	
1408320	SF10	25	M12x1,5	M16x1,5	105	52	M	
1408387	SF11	25	M12x1,5	M16x1,5	105	33	M	
1408824	SF13	25	M12x1,5	M16x1,5	105	33	M	
1409284	SF17	25	M14x1,5	M16x1,5	105	52 Max.	M	
1409285	SF18	25	M14x1,5	M16x1,5	105	52 Max.	M	
1409287	SF20	25	M14x1,5	M16x1,5	105	52 Max.	M	
1409570	SF21	25	M14x1,5	M16x1,5	105	52	M	
1409870	SF23	25	M12x1,5	M16x1,5	105	52	M	
1407023	SF3	25	M14x1,5	M16x1,5	¹⁾	40	M	
1420362	SF30	26	M14x1,5	M16x1,5	100	72	M	
1420879	SF34	26	M14x1,5	M16x1,5	105	52	M	
1422149	SF38	26	M14x1,5	M16x1,5	100	72	M	
1422762	SF42	26	M16x1,5	M14x1,5	100	72	M	
1424107	SF43	26	M16x1,5	M14x1,5	100	72	M	
1424371	SF44	26	M16x1,5	M14x1,5	100	72	M	
1407631	SF7	25	M14x1,5	M16x1,5	¹⁾	40	M	
1407704	SF8	25	M14x1,5	M16x1,5	¹⁾	40	M	
• SKV10000	-							
• SM1A	-		M12x1,5	M14x1,5	52	38	M	
• SM1B	-							
• SM2A	-							
I87755	VG3156	27	M16x1,5	M14x1,5	65	85	Hydr.	
I50486	VG3160	28	M22x1,5	M14x1,5	65	55	M	
I93581	VG3200	27	M16x1,5	M14x1,5	75	84	M	
I93582	VG3204	27	M16x1,5	M14x1,5	75	84	M	
I88094	VG3208	27	M16x1,5	M14x1,5	100	84	M	
I93585	VG3211	27	M16x1,5	M14x1,5	75	84	M	
I92489	VG3213	29	M16x1,5	M14x1,5	100	64	M	
II34814	VG3215	27	M16x1,5	M14x1,5	100	28	SAMT,M	

Part Number	Type No.	Fig.	Port Sizes		A [mm]	B [mm]	Comment/Key	
			Air Supply	Hyd Supply				
<i>II34816</i>	VG3217	30	M16x1,5	M14x1,5	100	28	SAMT,M	
<i>I93083</i>	VG3218		M16x1,5	M14x1,5	100	60	M	
<i>I97142</i>	VG3221		M16x1,5	M14x1,5	100	78	M	
<i>I98153</i>	VG3224	27	M16x1,5	M14x1,5	100	60	M	
<i>II34815</i>	VG3227	31	M16x1,5	M14x1,5	100	28	SAMT,M	
<i>II14193</i>	VG3228	27	M16x1,5	M14x1,5	100	60	M	
<i>II14194</i>	VG3229	27	M16x1,5	M14x1,5	100	84	SS,M	
<i>II17166</i>	VG3234	27	M16x1,5	M14x1,5	75	84	SS,M	
<i>II19612</i>	VG3238	27	M16x1,5	M14x1,5	100	64	M	
<i>II31733</i>	VG3261	32	Voss NG12	M14x1,5	100	85	SS,M	
<i>II17767</i>	VG3262	32	Voss NG12	M14x1,5	75	80	M	
<i>II35696</i>	VG3264	27	M16x1,5	M14x1,5	102	78	M	
<i>II36373</i>	VG3265		M16x1,5	M14x1,5	75	84	M	
<i>II36377</i>	VG3267	33	M16x1,5	M14x1,5	75	84	M	
<i>II37933</i>	VG3268		M16x1,5	M14x1,5	100	84	M	
<i>II36379</i>	VG3269	27	M16x1,5	M14x1,5	102	78	M	
<i>II37950</i>	VG3275	29	M16x1,5	M14x1,5	100	64	M	
<i>II40096F</i>	VG3276	27	M22x1,5	M14x1,5	95	40	M	
<i>II40381F</i>	VG3282	27	M16x1,5	M14x1,5	70	40	M	
<i>K000411</i>	VG3283	29	M16x1,5	M14x1,5	100	64	M	
<i>K000511</i>	VG3284	29	M16x1,5	M14x1,5	100	84	M	
<i>II17770</i>	VG3285	27	M16x1,5	M14x1,5	70	40	M	
<i>K001071</i>	VG3285	27	M16x1,5	M14x1,5	70	40	M	
<i>I93583</i>	VG3304	34	M16x1,5	M14x1,5	75	17	Hydr.	
<i>I93584</i>	VG3306	34	M16x1,5	M14x1,5	75	17	Hydr.	
<i>SEB01707</i>	VG3310		M16x1,5		110	19	M	
<i>II14195</i>	VG3361	35	M16x1,5	M14x1,5	102	76,8	SAMT,M	
<i>II17771</i>	VG3364	35	M16x1,5	M14x1,5	102	70	M	
<i>II37940</i>	VG3365	35	M16x1,5	M14x1,5	102	70	M	
<i>I87819</i>	VG8125	36	M22x1,5	M14x1,5			Hydr.	
<i>I92252</i>	VG8130		M22x1,5	M14x1,5			Hydr.	

¹⁾ Diaphragm

55. Clutch Actuators



Key:


IS	Integrated Silencer
M	Pneumatic Servo Mechanical Output

Connections:

A	Pin connector Cannon CA 3100F20A48P-B-01-08
B	Plug connector ZF No. 0659 050 145
C	Socket connector Kostal 09 4320 01 ZF No. 0501 316 201
D	Socket connector Kostal 09 4326 91 ZF No. 0501 317 679
E	Socket connector Volvo Part No.3944540
F	AMP 1-967325-1 ZF No. 0901 316 352

Air Supply port(s) size	M16x1,5
Servo Piston diameter	100 mm
Stroke	70 mm
Maximum delivery pressure	12 bar
Nominal operating pressure	6 bar
Maximum voltage solenoids	29v
Minimum voltage solenoids	19v
Voltage sensor	5v
Minimum piston force	4 kN
Maximum piston force	8 kN

- Preferred Product




Part Number	Type No.	Fig.	Connection		Comment/Key	
			1	2		
0483005001000	-	1	B		IS,M	
0483005002000	-		B		IS,M	
0483005003000	-	1	B		IS,M	
0483005004000	-		E		IS,M	
0483005005000	-		C	F	IS,M	
0483005006000	-		D	F	IS,M	
0483005007000	-		C		IS,M	
0483005008000	-		D	F	IS,M	
0483005010000	-		A	F	IS,M	
0483005011000	-		D	F	IS,M	
0483005012000	-		E		IS,M	
0483005013000	-		C		IS,M	

56. Master Cylinders



Key:

- A Bore diameter
- B Stroke
- Preferred Product

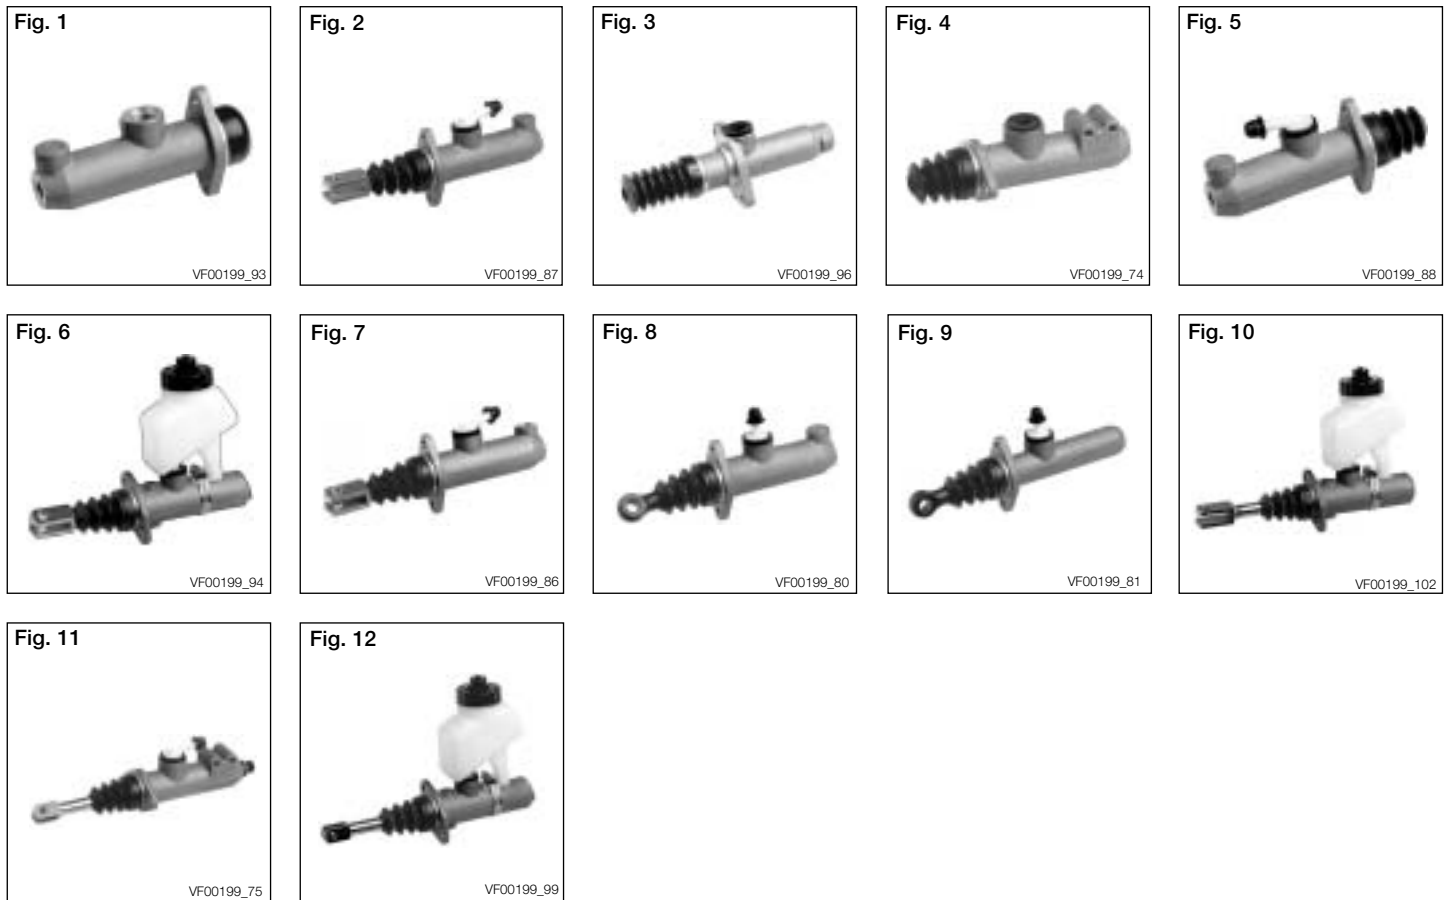

Part Number	Type No	Fig.	Port Size	A [mm]	B [mm]	
623104AM	-	1	1/2" UNF	26	31	
623105AM	-	1	1/2" UNF	28	28	
623106AM	-	2	1/2" UNF	26	31	
623109AM	-	3	M14x1,5	26	36	
623160AM	-	3	M14x1,5	24	36	
624248AM	-	2	1/2" UNF	28		
624503AM	-	4	M12x1,5	26	31	
625826AM	-	5	1/2" UNF	26	31	
626159AM	-	6	M14x1,5	28	32	
626564AM	-	7	M14x1,5	26	31	
626565AM	-	2	M14x1,5	26	31	
626760AM	-	8	M14x1,5	26	34	
626761AM	-	8	M14x1,5	24	31	
626762AM	-	9	M14x1,5	22	36	
627232AM	-	10	M14x1,5	28	32	
627233AM	-	10	M14x1,5	24	32	
624502AM	-	11		26		
626169AM	-	12	M12x1,5	28		

57. Slave Cylinders

Key:

- Preferred Product




Part Number	Type No.	Fig.	Port Sizes		
			Supply	Delivery	
• SC2B	-				
• SC2BK	-				

58. Gear Change Servo Valves



Key:

- Preferred Product










Part Number	Type No.	Fig.	Port Sizes		
			Supply	Delivery	
AC285B	-		M12x1,5	M12x1,5	
CPC53C	-		M12x1,5	M10x1,0	
CPC55C	-		M12x1,5	M10x1,0	
<i>I85043</i>	SV3302	1	M12x1,5	M12x1,5	
<i>I79678</i>	SV3360		M12x1,5	M12x1,5	
<i>I76936</i>	SV3367	2	M12x1,5	M14x1,5	
<i>I87538</i>	SV3368		M12x1,5	M14x1,5	
<i>I90498</i>	SV3371	3	M12x1,5	M12x1,5	
• GCM1B	-				
• GCM1C	-				
• GCM1E	-				

59. Operating Cylinders



Key:

- A Servo Piston diameter
- B Push rod thread, Yoke (Y)
- C Stroke
- Preferred Product



Part Number	Type No.	Fig.	Port Size	A [mm]	B	C [mm]	
0482005003000	-	1	Tube	30	Ø6 mm	25	
0482005005000	-	2	M12x1,5	30	M6x1,0	16	
0482005006000	-	3	M12x1,5	30	Ø6 mm	25	
0482005008000	-	4	M12x1,5	30	M8x1,25	45	
0482005013000	-	5	M12x1,5	30	M8x1,25	45	
0482005015000	-	5	M12x1,5	30	M8x1,25	45	
0482005017000	-	6	M12x1,5	30	M8x1,25	90	
0482005018000	-	7	M12x1,5	30	M8x1,25	80	
0482006006000	-	8	M12x1,5	35	M8x1,25	85	
0482006007000	-	9	M12x1,5	35	G8x16	85	
0482006008000	-	8	M12x1,5	35	M8x1,25	50	
0482006009000	-	10	M12x1,5	35	M12x1,5	85	
0482006014000	-	1	M12x1,5	35	M8x1,25	85	
0482016003000	-	11	M12x1,5	50	M12x1,5	65	
0482018002000	-	8	M12x1,5	35	M8x1,25	85	
0482020002000	-	12	M10x1,0	18	Ø7 mm	30	
0482020003000	-	12	M10x1,0	18	Ø7 mm	30	
0482020006000	-	13	Ø4 mm	22	Ø5,5 mm	20	
0482020007000	-	14	M12x1,5	22	Ø6 mm	15	
0482020008000	-	12	M10x1,0	18	Ø7 mm	30	
0482020009000	-	13	Ø4 mm	22	Ø4 mm	20	
0482020010000	-	14	M12x1,5	22	Ø6 mm	15	
0482024001000	-	15	M12x1,5	28	M8x1,25	48	
0482024003000	-	15	M12x1,5	28	M8x1,25	45	
0482024005000	-	16	M10x1,0	28	Ø4 mm	28	
0482102001000	-	17	M12x1,5	60	M12x1,5	120	
0482102002000	-	17	M12x1,5	60	M12x1,5	160	
0482102003000	-	17	M12x1,5	60	M16x1,5	160	
0482102004000	-	18	M12x1,5	60	M16x1,5	180	
0482102005000	-	17	M12x1,5	60	M12x1,5	210	
0482102006000	-	17	M12x1,5	60	M16x1,5	210	
0482102013000	-	17	M12x1,5	60	M16x1,5	120	
0482102015000	-	19	M12x1,5	60	M16x1,5	210	
0482102017000	-	17	M12x1,5	60	M16x1,5	140	
0482102018000	-	20	M12x1,5	60	M16x1,5	120	
0482102019000	-	20	M12x1,5	60	M16x1,5	140	
0491060001000	-	21	Ø6 mm	34,5	M6x1,0	35	
0491060002000	-						
0491060100000	-	22	Ø8 mm	68,5	M8x1,25	45	
0491060105000	-	23	Ø8 mm	68,5	M8x1,25	45	
0491060106000	-						
1080350000	-		Ø6 mm	30	Y	25	
1080354000	-		Ø6 mm	30	M8x1,25	25	
1080355000	-		Ø6 mm	30	Y	30	
1080356000	-		¹⁾	34	M8x1,25	56	
1080366000	-		Ø16 mm	34	M10x1,25	65	
1080376000	-						
1080380000	-		Ø16 mm	34	M8x1,25	56	
1080386000	-		Ø16 mm	34	M8x1,25	56	
AC375A	-	24	M10x1,0	18	M8x1,25	70	

Part Number	Type No.	Fig.	Port Size	A [mm]	B	C [mm]	
AC390PBX	-	25	M12x1,5	48	M10x1,25	80	
AC391DX	-	25	M12x1,5	40		70	
AC392BA	-	25	M12x1,5	40	M10x1,25	80	
AC396B	-		M12x1,5	25	M8x1,25	68	
AC397A	-		M10x1,0	35	M6x1,0	25	
AC398A	-	26	M12x1,5	35	M12x1,5	85	
AC398B	-	26	M12x1,5	35	M12x1,5	85	
AC399A	-	26	M10x1,0	30	M8x1,25	40	
AC399B	-	26	M10x1,0	30	M8x1,25	40	
AF399A	-						
I3974301	-						
I22772	SZ1100		M12x1,5	38	M6x1,0	25	
I43069	SZ1104		M8x1,0	20	M6x1,0	45	
I58893	SZ1115	27	M12x1,5	28	M6x1,0	50	
I63748	SZ1117	27	M12x1,5	24	M8x1,25	50	
I69478	SZ1119	26	M12x1,5	28	M8x1,25	25	
I76647	SZ1136	26					
I81616	SZ1144		M10x1,0	20	M6x1,0	50	
I87236	SZ1152	27	M12x1,5	26	M6x1,0	32	
I89463	SZ1156		M12x1,5	35	M8x1,25	50	
I85564	SZ1159	27	M12x1,5	24	M8x1,25	32/50	
I90948	SZ1161	26	M12x1,5	28	M8x1,25	48	
I93265	SZ1164	27					
I94189	SZ1165		M12x1,5	20	M14x1,5	50	
I94326	SZ1166	26	M12x1,5	30	M8x1,25	48	
II30128	SZ1180	27	M12x1,5	24	M8x1,25	48	
II37949	SZ1182						
II32920	SZ1190		M12x1,5	50	M10x1,25	48	
I41276	SZ1200	24	M12x1,5	35	M8x1,25	65	
I71779	SZ1208	24	M12x1,5	35	M8x1,25	65	
I79042	SZ1213	24	M12x1,5	35	M8x1,25	65	
I84269	SZ1223	27	M12x1,5	35	M6x1,0	48	
SEB00177	SZ1311		M10x1,0	55	M8x1,25	48	

¹⁾ 18mm - M10x1,0

Spares kits

Part Number	Kit Number	Description
0457101001000	1487010358000	Test Connector
	1487010359000	Filter Cartridge
	1487430002000	Filter Element
0480099004000	1487010138000	Spares Kit
0481007012000	1483300018000	Hexagon Nut
0481007016000	1483300018000	Hexagon Nut
0481007018000	1483300018000	Hexagon Nut
0481007022000	1483300018000	Hexagon Nut
0481007023000	1487010027000	Pushbutton
0481007027000	1487010105000	Spares Kit
	1487010264000	Rotary Knob
0481007028000	1483300018000	Hexagon Nut
0481007035000	1483300018000	Hexagon Nut
0481007037000	1483300018000	Hexagon Nut
0481007039000	1483300018000	Hexagon Nut
0481007043000	1483300018000	Hexagon Nut
0481007046000	1483300018000	Hexagon Nut
0481007059000	1483300018000	Hexagon Nut
0481007501000	1487010145000	Handle Kit
	1487010322000	Spares Kit
0481007503000	1487010145000	Handle Kit
0481008104000	1487010007000	Exhaust Valve
0481008106000	1487010060000	Service Kit
0481009014000	1487010221000	Seal Kit
0481009015000	1487010221000	Seal Kit
0481009016000	1487010221000	Seal Kit
0481009017000	1487010221000	Seal Kit
0481009018000	1487010221000	Seal Kit
0481009019000	1487010221000	Seal Kit
0481009020000	1487010175000	Spares Kit
0481009021000	1487010221000	Seal Kit
0481009022000	1487010221000	Seal Kit
0481009023000	1487010221000	Seal Kit
0481009025000	1487010221000	Seal Kit
0481009026000	1487010221000	Seal Kit
0481009027000	1487010221000	Seal Kit
0481009029000	1487010221000	Seal Kit
0481009030000	1487010221000	Seal Kit
0481009032000	1487010221000	Seal Kit
0481009034000	1487010221000	Seal Kit
0481009039000	1487010221000	Seal Kit
0481009040000	1487010221000	Seal Kit
0481009042000	1487010221000	Seal Kit
0481009043000	1487010221000	Seal Kit
0481009045000	1487010221000	Seal Kit
0481009047000	1487010221000	Seal Kit
0481009050000	1487010221000	Seal Kit
0481009051000	1487010221000	Seal Kit
0481009052000	1487010221000	Seal Kit
0481009055000	1487010221000	Seal Kit
0481009059000	1487010221000	Seal Kit
0481009061000	1487010221000	Seal Kit
0481009063000	1487010221000	Seal Kit
0481009064000	1487010221000	Seal Kit
0481009067000	1487010221000	Seal Kit
0481009069000	1487010221000	Seal Kit
0481009071000	1487010221000	Seal Kit
0481009101000	1487010221000	Seal Kit
0481016016000	1487010272000	Spares Kit
0481016106000	1487010272000	Spares Kit
0481016107000	1487010272000	Spares Kit
0481016108000	1487010272000	Spares Kit
0481016109000	1487010272000	Spares Kit
0481016112000	1487010272000	Spares Kit
0481016113000	1487010272000	Spares Kit
0481016114000	1487010272000	Spares Kit

Part Number	Kit Number	Description
0481016117000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016201000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016202000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016203000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016204000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016206000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016207000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016209000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016301000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016302000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016303000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016304000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016305000	1487010272000	Spares Kit
0481016308000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016309000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016312000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016401000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016402000	1487010160000	Valve Assembly
	1487010272000	Spares Kit
0481016603000	1487010297000	Spares Kit
0481019101000	1480022003000	Diaphragm
	1487010363000	Spares Kit
	1487432006000	Air Filter
0481026004000	1487010066000	Spares Kit
0481026005000	1480210179000	O-Ring
	1487010007000	Exhaust Valve
	1487010101000	Seal Kit
0481026006000	1487010007000	Exhaust Valve
	1487010101000	Seal Kit
0481026008000	1480210179000	O-Ring
	1487010007000	Exhaust Valve
	1487010101000	Seal Kit
0481026009000	1480210179000	O-Ring
	1487010280000	Spares Kit
	1487010301000	Spares Kit
0481026010000	1480210179000	O-Ring
0481026012000	1480210179000	O-Ring
	1487010101000	Seal Kit
0481026013000	1480210179000	O-Ring
	1487010007000	Exhaust Valve
	1487010101000	Seal Kit
0481026014000	1480210179000	O-Ring
0481026015000	1480210179000	O-Ring
	1487010280000	Spares Kit
	1487010300000	Spares Kit
0481026016000	1480210179000	O-Ring
	1487010280000	Spares Kit
	1487010301000	Spares Kit
0481026019000	1480210179000	O-Ring
	1487010299000	Service Kit

Spares kits

Part Number	Kit Number	Description
0481026021000	1480210179000	O-Ring
	1483386038000	Exhaust Port
	1487010299000	Service Kit
0481026022000	1480210179000	O-Ring
	1483386038000	Exhaust Port
	1487010299000	Service Kit
0481026026000	1480210179000	O-Ring
	1487010366000	Service Kit
	1487411016000	Silencer
0481026032000	1480210179000	O-Ring
	1487010299000	Service Kit
0481027101000	1487010245000	Spares Kit
0481027102000	1487010245000	Spares Kit
0481027103000	1487010245000	Spares Kit
0481027104000	1487010245000	Spares Kit
0481036101000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036102000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036105000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036108000	1480591900000	Valve Element
	1487010098000	Seal Kit
	1487010228000	Seal Ring
0481036115000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036116000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036117000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036121000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036122000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036123000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036124000	1480591900000	Valve Element
	1487010098000	Seal Kit
0481036205000	1480591900000	Valve Element
	1487010110000	Service Kit
0481036206000	1480591900000	Valve Element
	1487010110000	Service Kit
0481036207000	1480591900000	Valve Element
	1487010110000	Service Kit
0481039102000	1487010163000	Spares Kit
	1487010314000	Test Connector
0481039108000	1487010163000	Spares Kit
	1487010314000	Test Connector
0481039110000	1487010314000	Test Connector
0481039201000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039202000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039203000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039204000	1487010165000	Service Kit
0481039205000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039206000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039208000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039209000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039210000	1487010165000	Service Kit
	1487010314000	Test Connector

Part Number	Kit Number	Description
0481039211000	1487010165000	Service Kit
0481039213000	1487010102000	Service Kit
	1487010314000	Test Connector
0481039214000	1487010165000	Service Kit
0481039215000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039216000	1487010165000	Service Kit
0481039218000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039219000	1487010165000	Service Kit
0481039220000	1487010165000	Service Kit
0481039221000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039222000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039224000	1487010165000	Service Kit
0481039225000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039227000	1483351008000	Connection Piece
0481039228000	1487010102000	Service Kit
	1487010165000	Service Kit
	1487010314000	Test Connector
0481039234000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039235000	1487010165000	Service Kit
0481039240000	1487010165000	Service Kit
	1487010314000	Test Connector
0481039241000	1487010165000	Service Kit
	1487010314000	Test Connector
0481042106000	1487010163000	Spares Kit
	1487010314000	Test Connector
0481042201000	1487010165000	Service Kit
0481042202000	1487010165000	Service Kit
0481042205000	1487010165000	Service Kit
0481042207000	1487010165000	Service Kit
0481042208000	1487010165000	Service Kit
0481042209000	1487010165000	Service Kit
0481042210000	1487010165000	Service Kit
0481042211000	1487010165000	Service Kit
	1487010314000	Test Connector
0481042212000	1487010165000	Service Kit
0481042214000	1487010165000	Service Kit
	1487010314000	Test Connector
0481061004000	1487010166000	Spares Kit
0481061005000	1487010167000	Spares Kit
0481061007000	1487010166000	Spares Kit
0481061013000	1487010167000	Spares Kit
0481061015000	1487010166000	Spares Kit
0481061018000	1487010169000	Spares Kit
0481061020000	1487010170000	Spares Kit
0481061021000	1487010170000	Spares Kit
0481061022000	1487010170000	Spares Kit
0481061023000	1487010170000	Spares Kit
0481061025000	1487010171000	Spares Kit
0481061205000	1487010169000	Spares Kit
0481061206000	1487010169000	Spares Kit
0481061209000	1487010151000	Service Kit
	1487010340000	Spares Kit
0481061210000	1487010151000	Service Kit
	1487010340000	Spares Kit
0481061211000	1487010151000	Service Kit
	1487010152000	Seal Kit
0481061212000	1487010151000	Service Kit
	1487010152000	Seal Kit
0481061213000	1487010007000	Exhaust Valve
	1487010206000	O Ring Kit

Spares kits

Part Number	Kit Number	Description
0481061213000	1487010207000	Seal Kit
0481061214000	1487010007000	Exhaust Valve
	1487010206000	O Ring Kit
	1487010207000	Seal Kit
0481061215000	1487010007000	Exhaust Valve
	1487010207000	Seal Kit
	1487010208000	O Ring Kit
0481061219000	1487010257000	Service Kit
	1487010258000	Exhaust Valve
0481061220000	1487010007000	Exhaust Valve
	1487010151000	Service Kit
	1487010152000	Seal Kit
0481061225000	1487010007000	Exhaust Valve
	1487010257000	Service Kit
0481061226000	1487010257000	Service Kit
	1487010258000	Exhaust Valve
0481061228000	1487010257000	Service Kit
	1487010258000	Exhaust Valve
0481061230000	1487010007000	Exhaust Valve
	1487010207000	Seal Kit
	1487010208000	O Ring Kit
0481061231000	1487010007000	Exhaust Valve
	1487010207000	Seal Kit
	1487010208000	O Ring Kit
0481061232000	1487010007000	Exhaust Valve
	1487010207000	Seal Kit
	1487010208000	O Ring Kit
0481061233000	0484210001000	Silencer
	1487010151000	Service Kit
	1487010152000	Seal Kit
0481061234000	0484210001000	Silencer
	1487010151000	Service Kit
	1487010152000	Seal Kit
0481061245000	1487010257000	Service Kit
	1487010258000	Exhaust Valve
0481061248000	1487010207000	Seal Kit
	1487010298000	O Ring Kit
0481062004000	1487010172000	Spares Kit
0481062005000	1487010236000	Spares Kit
0481062006000	1487010236000	Spares Kit
0481062007000	1487010236000	Spares Kit
0481062008000	1487010236000	Spares Kit
0481062010000	1487010236000	Spares Kit
0481062011000	1487010172000	Spares Kit
0481062012000	1487010172000	Spares Kit
0481062104000	1487010234000	Seal Kit
0481062109000	1487010235000	Spares Kit
0481062110000	1487010235000	Spares Kit
0481062112000	1487010234000	Seal Kit
0481062114000	1487010234000	Seal Kit
0481062116000	1487010234000	Seal Kit
0481062202000	1487010237000	Spares Kit
0481062209000	1487010237000	Spares Kit
0481062301000	1487010234000	Seal Kit
0481062303000	1487010234000	Seal Kit
0481062306000	1487010234000	Seal Kit
0481062307000	1487010234000	Seal Kit
0481062308000	1487010234000	Seal Kit
0481062309000	1487010234000	Seal Kit
0481062310000	1487010234000	Seal Kit
0481062312000	1487010234000	Seal Kit
0481062317000	1487010234000	Seal Kit
0481062401000	1487010237000	Spares Kit
0481062403000	1487010237000	Spares Kit
0481062405000	1487010237000	Spares Kit
0481062407000	1487010237000	Spares Kit

Part Number	Kit Number	Description
0481062408000	1487010237000	Spares Kit
0481062412000	1487010237000	Spares Kit
0481062413000	1487010237000	Spares Kit
0481064002000	1487010178000	Spares Kit
0481064003000	1487010179000	Spares Kit
0481064005000	1487010060000	Service Kit
0481064007000	1487010178000	Spares Kit
0481064011000	1487010060000	Service Kit
0481064012000	1487010060000	Service Kit
0481064013000	1487010035000	Spares Kit
0481064016000	1487010060000	Service Kit
0481064017000	1487010060000	Service Kit
0481064101000	1487010182000	Service Kit
0481064102000	1487010182000	Service Kit
0481064103000	1487010060000	Service Kit
0481064105000	1487010338000	Spares Kit
0481064106000	1487010060000	Service Kit
0481064108000	1487010060000	Service Kit
0481064110000	0484210001000	Silencer
	1487010136000	Spares Kit
0481064113000	1487010060000	Service Kit
0481064115000	1487010338000	Spares Kit
0481064117000	1487010060000	Service Kit
0481064118000	0484210001000	Silencer
	1487010136000	Spares Kit
0481064121000	1487010060000	Service Kit
0481064122000	1487010060000	Service Kit
0481064201000	1487010183000	Spares Kit
0481064202000	1487010183000	Spares Kit
0481064205000	1487010060000	Service Kit
0481064206000	1487010060000	Service Kit
0481064209000	0484210001000	Silencer
	1487010136000	Spares Kit
0481064210000	0484210001000	Silencer
	1487010136000	Spares Kit
0481064211000	1487010060000	Service Kit
0481064212000	1487010060000	Service Kit
0481064214000	1487010060000	Service Kit
0481064217000	1487010136000	Spares Kit
0481064218000	1487010136000	Spares Kit
0481064301000	1487010184000	Service Kit
0481064303000	1487010184000	Service Kit
0481064401000	1487010185000	Spares Kit
0481064405000	1487010219000	Seal Kit
0481064601000	1487010219000	Seal Kit
0481064602000	1487010219000	Seal Kit
0481064701000	1487010219000	Seal Kit
0481064702000	1487010219000	Seal Kit
0481064703000	1487010219000	Seal Kit
0481500007000	1483104022000	Bolt
	1483203049000	Valve Head
0481500101000	1480015008000	Valve Head
	1480508059000	Protective Cap
0481500102000	1480015008000	Valve Head
	1480508059000	Protective Cap
0481500103000	1480015008000	Valve Head
	1480508059000	Protective Cap
0481500104000	1480508059000	Protective Cap
0481511002000	1487010255000	Spares Kit
0481511004000	1487010255000	Spares Kit
0482006006000	1487010058000	Spares Kit
0482006007000	1487010058000	Spares Kit
0482006008000	1487010058000	Spares Kit
0482006009000	1487010058000	Spares Kit
0482006011000	1487010058000	Spares Kit
0482006013000	1487010155000	Spares Kit

Spares kits

Part Number	Kit Number	Description
0482006014000	1487010155000	Spares Kit
0482022211000	1480703071000	Bellows
0482022411000	1480703071000	Bellows
0482023501000	1480503006000	Diaphragm
0482023505000	1480503006000	Diaphragm
0482071011000	1487010188000	Spares Kit
0482074001000	1487010005000	Spares Kit
0482074003000	1487010188000	Spares Kit
0482075010000	1487010189000	Spares Kit
0482101002000	1480283046000	Shaft Sealing Ring
0482101004000	1480283046000	Shaft Sealing Ring
0482101007000	1480283046000	Shaft Sealing Ring
0482102001000	1487010252000	Spares Kit
0482102002000	1487010252000	Spares Kit
0482102003000	1487010252000	Spares Kit
0482102004000	1487010252000	Spares Kit
0482102005000	1487010252000	Spares Kit
0482102006000	1487010252000	Spares Kit
0482102013000	1487010252000	Spares Kit
0482102015000	1487010252000	Spares Kit
0482102017000	1487010252000	Spares Kit
0482102018000	1487010252000	Spares Kit
0482102019000	1487010252000	Spares Kit
0482512015000	1487010117000	Spares Kit
0482512017000	1487010117000	Spares Kit
0482512024000	1487010117000	Spares Kit
0482512212000	1487010063000	Spares Kit
0482512214000	1487010063000	Spares Kit
0482512215000	1487010200000	Spares Kit
0482513001000	1487010126000	Spares Kit
0482513002000	1487010126000	Spares Kit
0482513401000	1487010128000	Spares Kit
0482513402000	1487010128000	Spares Kit
0482513406000	1487010128000	Spares Kit
0482513407000	1487010128000	Spares Kit
0482513551000	1487010231000	Spares Kit
0482513552000	1487010231000	Spares Kit
0482513556000	1487010231000	Spares Kit
0482513557000	1487010231000	Spares Kit
0482513606000	1487010127000	Spares Kit
0482513607000	1487010127000	Spares Kit
0482513610000	1487010127000	Spares Kit
0482513611000	1487010127000	Spares Kit
0483004102000	1487010195000	Seal Kit
0483004103000	1487010195000	Seal Kit
0483004104000	1487010195000	Seal Kit
	1488705044000	Piston
0483004105000	1487010195000	Seal Kit
0483004106000	1487010195000	Seal Kit
	1488705044000	Piston
0483004112000	1487010195000	Seal Kit
0483004114000	1487010195000	Seal Kit
	1488705044000	Piston
0483004201000	1487010196000	Spares Kit
0483004401000	1487010196000	Spares Kit
0483004501000	1487010196000	Spares Kit
0483004601000	1487010196000	Spares Kit
	1488705044000	Piston
0483004701000	1487010196000	Spares Kit
	1488705044000	Piston
0484210015000	1480210295000	O-Ring
0484351012000	1482098017000	Switch Lever
	1487010264000	Rotary Knob
0484451005000	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451006000	1487010345000	Spares Kit

Part Number	Kit Number	Description
0484451007000	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451008000	1480502900000	Sealing Cover
	1485400025000	Container
	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451009000	1480502900000	Sealing Cover
	1485400025000	Container
	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451011000	1480502900000	Sealing Cover
	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451013000	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451014000	1487010199000	Service Kit
	1487010345000	Spares Kit
0484451019000	1480502900000	Sealing Cover
	1487010199000	Service Kit
0484460007000	1480210079000	O-Ring
	1487010139000	Service Kit
	1487010318000	Check Valve Kit
0484460008000	1487010139000	Service Kit
	1487010159000	Heater Kit
	1487010318000	Check Valve Kit
0484460021000	1487010139000	Service Kit
	1487010159000	Heater Kit
0484460022000	1487010139000	Service Kit
	1487010159000	Heater Kit
0484460023000	1487010159000	Heater Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460102000	1487010139000	Service Kit
	1487010159000	Heater Kit
	1487010218000	Diaphragm & Seal Kit
	1487010316000	Unloader Kit
	1487010318000	Check Valve Kit
0484460103000	1487010139000	Service Kit
	1487010218000	Diaphragm & Seal Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460106000	1487010139000	Service Kit
	1487010205000	Heater Kit (Type B1)
	1487010218000	Diaphragm & Seal Kit
	1487010318000	Check Valve Kit
0484460109000	1487010139000	Service Kit
	1487010218000	Diaphragm & Seal Kit
	1487010318000	Check Valve Kit
0484460111000	1487010139000	Service Kit
	1487010159000	Heater Kit
	1487010218000	Diaphragm & Seal Kit
	1487010318000	Check Valve Kit
0484460116000	1487010139000	Service Kit
	1487010159000	Heater Kit
	1487010218000	Diaphragm & Seal Kit
	1487010318000	Check Valve Kit
0484460131000	1487010139000	Service Kit
	1487010205000	Heater Kit (Type B1)
	1487010218000	Diaphragm & Seal Kit
	1487010316000	Unloader Kit
	1487010318000	Check Valve Kit
0484460135000	1487010139000	Service Kit
	1487010205000	Heater Kit (Type B1)
	1487010218000	Diaphragm & Seal Kit
	1487010317000	Purge Valve Kit

Spares kits

KNORR-BREMSE



Part Number	Kit Number	Description
0484460135000	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
0484460153000	1487010159000	Heater Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460158000	1487010318000	Check Valve Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460159000	II40100F	Filter Cartridge
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460160000	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
	1487010316000	Unloader Kit
0484460165000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010327000	Diaphragm
	1487010205000	Heater Kit (Type B1)
0484460167000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
0484460168000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460169000	II40100F	Filter Cartridge
	1487010205000	Heater Kit (Type B1)
	1487010316000	Unloader Kit
0484460170000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
0484460171000	1487010159000	Heater Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460173000	1487010318000	Check Valve Kit
	1487010159000	Heater Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460177000	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
	1487010159000	Heater Kit
	1487010316000	Unloader Kit
0484460178000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010159000	Heater Kit
	1487010316000	Unloader Kit
0484460180000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
	1487010205000	Heater Kit (Type B1)
0484460182000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge

Part Number	Kit Number	Description
0484460183000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
0484460185000	1487010205000	Heater Kit (Type B1)
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460186000	II40100F	Filter Cartridge
	1487010205000	Heater Kit (Type B1)
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460187000	1487010318000	Check Valve Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460188000	II40100F	Filter Cartridge
	1487010205000	Heater Kit (Type B1)
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460189000	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
	II40100F	Filter Cartridge
	1487010316000	Unloader Kit
0484460190000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
	II40100F	Filter Cartridge
0484460191000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
0484460192000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
0484460193000	II40100F	Filter Cartridge
	1487010159000	Heater Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
0484460194000	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
	1487010159000	Heater Kit
	1487010316000	Unloader Kit
0484460195000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
	II40100F	Filter Cartridge
0484460196000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
0484460197000	1487010159000	Heater Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460198000	II40100F	Filter Cartridge
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit

Spares kits



Part Number	Kit Number	Description
0484460198000	1487010159000	Heater Kit
	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
0484460199000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
	II40100F	Filter Cartridge
0484460200000	1487010316000	Unloader Kit
	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	1487010343000	Heater Kit (Type B2)
	II40100F	Filter Cartridge
0484460202000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0484460204000	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
0486203014000	1485515022000	Cover
0486203022000	1485515022000	Cover
0486203033000	1485515022000	Cover
0500005001000	1507010007000	Seal Kit
	1507010010000	Lever
0500005002000	1507010007000	Seal Kit
	1507010010000	Lever
0500005003000	1507010007000	Seal Kit
0500005006000	1507010007000	Seal Kit
0500005007000	1507010007000	Seal Kit
0500005011000	1507010007000	Seal Kit
0500005012000	1507010007000	Seal Kit
0500005101000	1507010007000	Seal Kit
	1507010010000	Lever
0500005102000	1507010007000	Seal Kit
	1507010010000	Lever
0500005104000	1507010007000	Seal Kit
0500005105000	1507010007000	Seal Kit
0501100009000	1507010014000	Service Kit
	1507010039000	O Ring Kit
0501100011000	1507010015000	Service Kit
	1507010022000	Valve Head
	1507010033000	Lifting Magnet
	1507010039000	O Ring Kit
0501100012000	1507434000000	Filter Cartridge
0501100013000	1507010015000	Service Kit
	1507010022000	Valve Head
	1507010033000	Lifting Magnet
	1507010039000	O Ring Kit
0501100014000	1507010022000	Valve Head
	1507010039000	O Ring Kit
0501100015000	1507010018000	Service Kit
	1507010033000	Lifting Magnet
	1507010039000	O Ring Kit
0501100016000	1507010039000	O Ring Kit
0501100017000	0484210001000	Silencer
	1507010015000	Service Kit
	1507010022000	Valve Head
	1507010033000	Lifting Magnet
	1507010039000	O Ring Kit
0501100018000	1507010018000	Service Kit
	1507010033000	Lifting Magnet
	1507010039000	O Ring Kit
	1508700010000	Valve Element
0501100019000	1507010039000	O Ring Kit
0501100020000	1507010022000	Valve Head
	1507010039000	O Ring Kit

Part Number	Kit Number	Description
0501100021000	1507010039000	O Ring Kit
0501100022000	1507010039000	O Ring Kit
0501100023000	1507434000000	Filter Cartridge
0501100024000	1507434000000	Filter Cartridge
0501100025000	1507010022000	Valve Head
	1507010039000	O Ring Kit
0501100026000	1507010039000	O Ring Kit
0501100027000	1507010022000	Valve Head
	1507010039000	O Ring Kit
0501100028000	1507010039000	O Ring Kit
0501100029000	1507010022000	Valve Head
	1507010039000	O Ring Kit
0501100030000	1507010039000	O Ring Kit
0501100031000	1507010022000	Valve Head
	1507010039000	O Ring Kit
0501100032000	1507010039000	O Ring Kit
0501100033000	1507010039000	O Ring Kit
0501100035000	1507010039000	O Ring Kit
0501100038000	1507010039000	O Ring Kit
0501100040000	1507010022000	Valve Head
	1507010039000	O Ring Kit
0501100041000	1507010039000	O Ring Kit
0501100049000	1507010041000	Spares Kit
0501100050000	1507010039000	O Ring Kit
0501100051000	1507010039000	O Ring Kit
0501100055000	1507010039000	O Ring Kit
0501100405000	1507010041000	Spares Kit
0501100406000	1487010159000	Heater Kit
	1507010042000	Spares Kit
0501100407000	1507010041000	Spares Kit
0504050001000	1507010045000	Service Kit
0504050002000	1507010045000	Service Kit
0504050003000	1507010045000	Service Kit
0504050004000	1507010045000	Service Kit
0504050005000	1507010045000	Service Kit
0504050007000	1507010045000	Service Kit
0504050008000	1507010045000	Service Kit
0504050011000	1507010045000	Service Kit
1013099000	SEB22213	Cylinder Head Kit
1013167000	SEB22212	Spares Kit
	SEB22213	Cylinder Head Kit
1013200000	SEB22364	Spares Kit
	SEB22367	Spares Kit
1013278000	SEB22213	Cylinder Head Kit
1013283000	SEB22213	Cylinder Head Kit
1013378000	SEB22213	Cylinder Head Kit
1013383000	SEB22213	Cylinder Head Kit
1013387000	SEB22213	Cylinder Head Kit
1013393000	SEB22213	Cylinder Head Kit
1013395000	SEB22214	Spares Kit
1013397000	SEB22214	Spares Kit
1013398000	SEB22213	Cylinder Head Kit
1013491000	SEB22214	Spares Kit
1023275000	SEB22267	Spares Kit
1023277000	SEB22267	Spares Kit
1023285000	SEB22267	Spares Kit
1023295000	SEB22267	Spares Kit
1023298000	SEB22267	Spares Kit
1023299000	SEB22267	Spares Kit
1031065000	SEB22277	Spares Kit
1031087000	SEB22280	Spares Kit
1043106000	SEB22284	Spares Kit
1043110000	SEB22284	Spares Kit
1043111000	SEB22284	Spares Kit
1043116000	SEB22284	Spares Kit
1043130000	SEB22284	Spares Kit

Spares kits

Part Number	Kit Number	Description
1051286000	SEB22383	Spares Kit
1051287000	SEB22383	Spares Kit
1051288000	SEB22383	Spares Kit
1051289000	SEB22383	Spares Kit
1051290000	SEB22383	Spares Kit
1051291000	SEB22383	Spares Kit
1051292000	SEB22383	Spares Kit
1051293000	SEB22383	Spares Kit
1051298000	SEB22383	Spares Kit
1051299000	SEB22383	Spares Kit
1051310000	SEB22383	Spares Kit
1051311000	SEB22383	Spares Kit
1051312000	SEB22383	Spares Kit
1051338000	SEB22386	Spares Kit
1051339000	SEB22386	Spares Kit
1051346000	SEB22386	Spares Kit
1053222000	SEB22386	Spares Kit
1053228000	SEB22386	Spares Kit
1071288000	SEB22391	Spares Kit
1100586000	SEB22290	Spares Kit
1101585000	SEB22296	Spares Kit
1101685000	SEB22296	Spares Kit
1101691000	SEB22296	Spares Kit
1111340000	SEB22304	Spares Kit
1111341000	SEB22304	Spares Kit
1111375000	SEB22304	Spares Kit
1111378000	SEB22304	Spares Kit
1111381000	SEB22304	Spares Kit
1111382000	SEB22304	Spares Kit
1111383000	SEB22304	Spares Kit
1111384000	SEB22304	Spares Kit
1111471000	SEB22307	Spares Kit
1111491000	SEB22307	Spares Kit
1111493000	SEB22311	Spares Kit
1111696000	SEB22306	Spares Kit
1111698000	SEB22306	Spares Kit
1111730000	SEB22322	Spares Kit
1111762000	SEB22322	Spares Kit
1111790000	SEB22322	Spares Kit
1111792000	SEB22322	Spares Kit
1111793000	SEB22322	Spares Kit
1111853000	SEB22303	Spares Kit
1111950000	SEB22303	Spares Kit
1111951000	SEB22303	Spares Kit
1111965000	SEB22316	Spares Kit
1111980000	SEB22315	Spares Kit
1111995000	SEB22315	Spares Kit
1111996000	SEB22315	Spares Kit
1111999000	SEB22315	Spares Kit
1112001000	SEB22315	Spares Kit
1112002000	SEB22315	Spares Kit
1185145	SK2612/1	Guide And Seal Kit
1185688	SK2612/1	Guide And Seal Kit
1186502	SK2905/1	Valve Plate Assembly
	SK2978/1	Gasket Set
	SKR2825/00	Piston Rings
1186540-1	1187160	Filter
	SK2904/2	Unloader Kit
	SK2914/1	Cartridge
	SK2961/1	Purge Valve Kit
1186544	SK2612/1	Guide And Seal Kit
1186550	SK2814/2	Service Kit
1186551	SK2937/1	Gasket Set
	SK3033/1	Valve Plate Assembly
	SKR2876/00	Piston Rings
1186577	1189902	Diaphragm

Part Number	Kit Number	Description
1186587	SK2888/1	Heater
	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
1186591	1187160	Filter
	SK2888/1	Heater
	SK2914/1	Cartridge
	SK2961/1	Purge Valve Kit
1186606-01	K2B0002XU	Spring Portion
1186616	SK2937/1	Gasket Set
	SK3033/1	Valve Plate Assembly
	SKR2876/00	Piston Rings
1186720	SK2681/5	Gasket and Unloader Kit
1186722	SK2681/5	Gasket and Unloader Kit
1186722SP	SK2681/5	Gasket and Unloader Kit
1186732-01	272489	Diaphragm
	K2E0311XU	Spring Portion
1186733-01	272489	Diaphragm
1186753	1188614	Yoke
	1189902	Diaphragm
1186754	1188614	Yoke
	1189902	Diaphragm
1186892	SK2801/3	Diaphragm
1186893	234099K	Diaphragm
1188550	SK2681/5	Gasket and Unloader Kit
	SKR2962/00	Piston Rings
1188550VE	SK2681/5	Gasket and Unloader Kit
	SKR2962/00	Piston Rings
1188768	SK2814/2	Service Kit
1188780	SK2612/1	Guide And Seal Kit
1188782-01	234100K	Diaphragm
1188783-02	228790	Yoke
1188801	1187160	Filter
	SK2888/1	Heater
	SK2904/2	Unloader Kit
	SK2914/1	Cartridge
	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
1188823	1188614	Yoke
	1189902	Diaphragm
1188824XU	1189902	Diaphragm
1188844	KZ645/3SP	Cylinder Head
	SK2681/5	Gasket and Unloader Kit
1188845	1188614	Yoke
	1189902	Diaphragm
1188881-01	234189K	Diaphragm
1188881-02	234189K	Diaphragm
1188924	1187160	Filter
	SK2888/1	Heater
	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
1188995	1187160	Filter
	SK2888/1	Heater
	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
1189072-01	272489	Diaphragm
1189079-02	234189K	Diaphragm
1189089	1187160	Filter
	SK2888/1	Heater
	SK2904/2	Unloader Kit
	SK2914/1	Cartridge
	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
1189100	SK2905/1	Valve Plate Assembly
	SK2978/1	Gasket Set
1189106	SK2681/5	Gasket and Unloader Kit
1189107	SK2681/5	Gasket and Unloader Kit

Spares kits

Part Number	Kit Number	Description
1189163	1187160	Filter
1189174	SK2965/1	Gasket Set
	SK2967/1	Cylinder Head
	SK2968/1	Reed Valve Kit
1189198	SKR2876/00	Piston Rings
	SK2965/1	Gasket Set
	SK2968/1	Reed Valve Kit
1189199	SK2965/1	Gasket Set
	SK2969/1	Reed Valve Kit
	SK2969/1	Reed Valve Kit
1189200	SK2969/1	Reed Valve Kit
1189381	SK2965/1	Gasket Set
	SK2967/1	Cylinder Head
	SK2968/1	Reed Valve Kit
1189383	SKR2876/00	Piston Rings
	SK2969/1	Reed Valve Kit
	SK2965/1	Gasket Set
1189384	SK2969/1	Reed Valve Kit
	SK2965/1	Gasket Set
	SK2968/1	Reed Valve Kit
1189385	SKR2876/00	Piston Rings
	SK2814/2	Service Kit
	SK2612/1	Guide And Seal Kit
1189389	24LS	Diaphragm
1189426	16LS	Diaphragm
1189435	295517	Yoke
	SK2905/1	Valve Plate Assembly
	SK2978/1	Gasket Set
1189439	SKR2825/00	Piston Rings
	234099K	Diaphragm
	1188614	Yoke
1189448	1189902	Diaphragm
	1188614	Yoke
	1189902	Diaphragm
1189449	16LS	Diaphragm
	295518	Yoke
	SK2965/1	Gasket Set
1189458	SK2968/1	Reed Valve Kit
	SKR2876/00	Piston Rings
	SK2969/1	Reed Valve Kit
1189470	SKR2825/00	Piston Rings
	SK2965/1	Gasket Set
	SK2969/1	Reed Valve Kit
1189481	SK2965/1	Gasket Set
	SK2968/1	Reed Valve Kit
	SKR2876/00	Piston Rings
1189490	234362	Diaphragm
	SK2814/2	Service Kit
	SK2965/1	Gasket Set
1189492	SK2967/1	Cylinder Head
	SK2968/1	Reed Valve Kit
	SKR2876/00	Piston Rings
1189497	SK2969/1	Reed Valve Kit
	SKR2825/00	Piston Rings
	SK2965/1	Gasket Set
1189498	SK2969/1	Reed Valve Kit
	1189201SP	Piston Assembly
	SK2965/1	Gasket Set
1189499	SK2968/1	Reed Valve Kit
	SKR2876/00	Piston Rings
	SK2965/1	Gasket Set
1189500	SK2968/1	Reed Valve Kit
	SKR2876/00	Piston Rings
	1186555SP	Check Valve
1194016	SK2842/1	Service Kit
	SK2888/1	Heater
	SK2904/2	Unloader Kit
1194101	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
	SEB22495	Gasket Set
1194128	SK3043/1	Reed Valve Kit
	234101K	Diaphragm
	234099K	Diaphragm
1194135	234099K	Diaphragm

Part Number	Kit Number	Description
1194150	1187160	Filter
	SK2888/1	Heater
	SK2914/1	Cartridge
1194152	SK2961/1	Purge Valve Kit
	234100K	Diaphragm
	SK2888/1	Heater
1194180	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
	234100K	Diaphragm
1194182	SK2888/1	Heater
	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
1194188	SK2972/1	Silencer
	I80177SP	Piston Assembly
	234099K	Diaphragm
1194191	1194269SP	Valve Plate Assembly
	SEB22491	Gasket Set
	SEB22495	Gasket Set
1194194	SK3043/1	Reed Valve Kit
	234100K	Diaphragm
	SK2888/1	Heater
1194208	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
1194211	1187160	Filter
	SK2904/2	Unloader Kit
	SK2914/1	Cartridge
1194213	SK2961/1	Purge Valve Kit
	SK2972/1	Silencer
	SK2937/1	Gasket Set
1194215	SK3033/1	Valve Plate Assembly
	SKR2876/00	Piston Rings
	20LS	Diaphragm
1194224	234100K	Diaphragm
	234100K	Diaphragm
	234100K	Diaphragm
1194258	SEB22491	Gasket Set
	SK3043/1	Reed Valve Kit
	II40100F	Filter Cartridge
1194259	SK2888/1	Heater
	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
1194275	1194269SP	Valve Plate Assembly
	SEB22491	Gasket Set
	SEB22495	Gasket Set
1194309	SK3043/1	Reed Valve Kit
	SEB22491	Gasket Set
	SEB22495	Gasket Set
1194397	SK3043/1	Reed Valve Kit
	SEB22491	Gasket Set
	SEB22495	Gasket Set
1194410	SK3043/1	Reed Valve Kit
	SEB22329	Spares Kit
	SEB22329	Spares Kit
1194415	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252016000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252021000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252416000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252417000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252423000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252433000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
1252434000	SEB22330	Spares Kit
	SEB22330	Spares Kit
	SEB22330	Spares Kit
131.720	381.391	Guide And Seal Kit
	381.412	Wear Indicator Kit
	381.413	Seal Kit
131.721	381.419	Pad Retainer Kit
	381.427	Wedge
	381.429	Adjusting Device
131.722	II32957	Pad Set (Federal-Mogul)
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
131.723	381.391	Guide And Seal Kit
	381.412	Wear Indicator Kit
	381.413	Seal Kit

Spares kits

Part Number	Kit Number	Description
131.721	381.413	Seal Kit
	381.419	Pad Retainer Kit
	381.427	Wedge
	381.429	Adjusting Device
	II32957	Pad Set (Federal-Mogul)
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
131.766	381.391	Guide And Seal Kit
	381.412	Wear Indicator Kit
	381.413	Seal Kit
	381.422	Pad Retainer Kit
	381.428	Adjusting Device
	II32955	Pad Set
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
131.767	381.391	Guide And Seal Kit
	381.412	Wear Indicator Kit
	381.413	Seal Kit
	381.422	Pad Retainer Kit
	381.428	Adjusting Device
	II32955	Pad Set
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
131.774	381.391	Guide And Seal Kit
	381.413	Seal Kit
	381.419	Pad Retainer Kit
	381.425	Wear Indicator Kit
	381.427	Wedge
	381.429	Adjusting Device
	II32957	Pad Set (Federal-Mogul)
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	SK2973/1	Brake Chamber (Disc) (T18)
	SK2973/2	Brake Chamber (Disc) (T20)
	SK2973/3	Brake Chamber (Disc) (T22)
	SK2973/4	Brake Chamber (Disc) (T24)
	SK2973/4	Brake Chamber (Disc) (T24)
131.775	381.391	Guide And Seal Kit
	381.413	Seal Kit
	381.419	Pad Retainer Kit
	381.425	Wear Indicator Kit
	381.427	Wedge
	381.429	Adjusting Device
	II32957	Pad Set (Federal-Mogul)
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	SK2973/1	Brake Chamber (Disc) (T18)
	SK2973/2	Brake Chamber (Disc) (T20)
	SK2973/3	Brake Chamber (Disc) (T22)
	SK2973/4	Brake Chamber (Disc) (T24)
	SK2973/4	Brake Chamber (Disc) (T24)
131.776	381.391	Guide And Seal Kit
	381.413	Seal Kit
	381.419	Pad Retainer Kit
	381.425	Wear Indicator Kit
	381.427	Wedge
	381.429	Adjusting Device
	II32957	Pad Set (Federal-Mogul)
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	SK2973/1	Brake Chamber (Disc) (T18)
	SK2973/2	Brake Chamber (Disc) (T20)
	SK2973/3	Brake Chamber (Disc) (T22)
	SK2973/4	Brake Chamber (Disc) (T24)
	SK2973/4	Brake Chamber (Disc) (T24)
131.777	381.391	Guide And Seal Kit
	381.413	Seal Kit
	381.419	Pad Retainer Kit
	381.419	Pad Retainer Kit
	381.419	Pad Retainer Kit

Part Number	Kit Number	Description
131.777	381.425	Wear Indicator Kit
	381.427	Wedge
	381.429	Adjusting Device
	II32957	Pad Set (Federal-Mogul)
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II38820F	Pad Set (Ferodo)
	SK2973/1	Brake Chamber (Disc) (T18)
	SK2973/2	Brake Chamber (Disc) (T20)
	SK2973/3	Brake Chamber (Disc) (T22)
	SK2973/4	Brake Chamber (Disc) (T24)
	SK2973/4	Brake Chamber (Disc) (T24)
131.790	381.391	Guide And Seal Kit
	381.413	Seal Kit
	381.422	Pad Retainer Kit
	381.425	Wear Indicator Kit
	381.428	Adjusting Device
	II32955	Pad Set
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	SK2973/1	Brake Chamber (Disc) (T18)
	SK2973/2	Brake Chamber (Disc) (T20)
	SK2973/3	Brake Chamber (Disc) (T22)
	SK2973/4	Brake Chamber (Disc) (T24)
	SK2973/4	Brake Chamber (Disc) (T24)
131.791	381.391	Guide And Seal Kit
	381.413	Seal Kit
	381.422	Pad Retainer Kit
	381.425	Wear Indicator Kit
	381.428	Adjusting Device
	II32955	Pad Set
	II33692	Retaining Pin
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	II34564	Thrust Plate Bolts
	SK2973/1	Brake Chamber (Disc) (T18)
	SK2973/2	Brake Chamber (Disc) (T20)
	SK2973/3	Brake Chamber (Disc) (T22)
	SK2973/4	Brake Chamber (Disc) (T24)
	SK2973/4	Brake Chamber (Disc) (T24)
1407023	1406860	Pneumatic/Hydraulic Kit
	1421958	O-Ring
	1407631	Pneumatic/Hydraulic Kit
	1421958	O-Ring
	1407704	Spares Kit
1420362	1423079	Kit Hydraulic/Pneumatic Valve
	1423081	Seal Kit
	1422149	Seal Kit
	1422762	Seal Kit
	1424008	Kit Hydraulic/Pneumatic Valve
1424107	1423081	Seal Kit
	1424008	Kit Hydraulic/Pneumatic Valve
	1424008	Kit Hydraulic/Pneumatic Valve
	1424371	Seal Kit
	1426591	Air Valve
267000	SK2767/1	Service Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2767/1	Service Kit
	SK2612/1	Guide And Seal Kit
267015	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
267051	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
267085	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
267098	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
267101	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
267114	SK2882/1	Service Kit
	SK2882/1	Service Kit
	SK2882/1	Service Kit
	SK2882/1	Service Kit
	SK2882/1	Service Kit
267121SP	KX1729/5	Safety Valve
	KX1729/5	Safety Valve
	KX1729/5	Safety Valve
	KX1729/5	Safety Valve
	KX1729/5	Safety Valve
269613	SK2814/1	Service Kit
	SK2814/1	Service Kit
	SK2814/1	Service Kit
	SK2814/1	Service Kit
	SK2814/1	Service Kit
269712	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
269733	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
269752	SK2835/1	Service Kit
	SK2835/1	Service Kit
	SK2835/1	Service Kit
	SK2835/1	Service Kit
	SK2835/1	Service Kit
269807	KX1729/3	Safety Valve
	KX1729/3	Safety Valve
	KX1729/3	Safety Valve
	KX1729/3	Safety Valve
	KX1729/3	Safety Valve
	SK2767/2	Cartridge
	SK2767/2	Cartridge
	SK2767/2	Cartridge
	SK2767/2	Cartridge
	SK2767/2	Cartridge
269827	SK2767/1	Service Kit
	SK2767/1	Service Kit
	SK2767/1	Service Kit
	SK2767/1	Service Kit
	SK2767/1	Service Kit
269827SP	KX175/1	Safety Valve
	KX175/1	Safety Valve
	KX175/1	Safety Valve
	KX175/1	Safety Valve
	KX175/1	Safety Valve
272126	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit
	SK2612/1	Guide And Seal Kit

Spares kits

Part Number	Kit Number	Description
272921	SK2601/1	Cylinder Head Kit
274420	234226K	Diaphragm
274424	234101K	Diaphragm
274425	234362	Diaphragm
274580	SK2604/2	Service Kit
274829	SK2612/1	Guide And Seal Kit
274838	SK2601/1	Cylinder Head Kit
274996	SK2801/1	Diaphragm and Exhaust Flap
	SK2801/3	Diaphragm
274997	SK2801/1	Diaphragm and Exhaust Flap
	SK2801/3	Diaphragm
274998	SK2801/1	Diaphragm and Exhaust Flap
	SK2801/3	Diaphragm
274999	SK2801/1	Diaphragm and Exhaust Flap
	SK2801/3	Diaphragm
275200	SK2612/1	Guide And Seal Kit
275491	SK2612/1	Guide And Seal Kit
275508	SK2612/1	Guide And Seal Kit
277484	SK2612/1	Guide And Seal Kit
277486	SK2612/1	Guide And Seal Kit
277508	SK2612/1	Guide And Seal Kit
277812	SK2612/1	Guide And Seal Kit
279180	SK2661/1	Spares Kit
280375	SK2661/1	Spares Kit
281058	SK2612/1	Guide And Seal Kit
295071	SK2661/1	Spares Kit
295095	SK2661/1	Spares Kit
295198	SK2661/1	Spares Kit
295199	SK2661/1	Spares Kit
295201	SK2612/1	Guide And Seal Kit
295249	SK2661/1	Spares Kit
295295	SK2661/1	Spares Kit
295528	SK2661/1	Spares Kit
295529	SK2661/1	Spares Kit
295554	234099K	Diaphragm
295555	234100K	Diaphragm
295571	SK2767/1	Service Kit
295591	KX1729/2	Safety Valve
443612074700	S443612074700	Spares Kit
443612074701	S443612074700	Spares Kit
443612074702	S443612074700	Spares Kit
443612074703	S443612074700	Spares Kit
443612074704	S443612074700	Spares Kit
443612074706	S443612074700	Spares Kit
443612164003	S443612164003	Spares Kit
443612164007	S4436121647-1	Spares Kit
	S4436121647-3	Spares Kit
443612193017	S443612193017	Spares Kit
443612226005	S443612226007	Spares Kit
443612226007	S443612226007	Spares Kit
443612280001	S443612280001	Spares Kit
443612305702	S443612305702	Spares Kit
443612305708	S443612305702	Spares Kit
443612305752	S443612305750	Spares Kit
622107AM	622158AM	Spares Kit
622109AM	622158AM	Spares Kit
622110AM	622158AM	Spares Kit
622190AM	622195AM	Spares Kit (Old version)
	625282AM	Main Service Kit
622199AM	622195AM	Spares Kit (Old version)
	625282AM	Main Service Kit
622504AM	625218AM	Spares Kit
624199AM	622195AM	Spares Kit (Old version)
	625282AM	Main Service Kit
624503AM	623157AM	Spares Kit
625586AM	626062AM	Spares Kit

Part Number	Kit Number	Description	
625671AM	626787AM	Spares Kit	
	628306AM	Clutch Servo	
626392AM	626703AM	Spares Kit	
626639AM	622095AM	Spares Kit (Old version)	
	627182AM	Spares Kit	
	627366AM	Main Service Kit	
	626783AM	626787AM	Spares Kit
	626964AM	Upgrade Kit	
	628306AM	Clutch Servo	
	626784AM	626787AM	Spares Kit
	626964AM	Upgrade Kit	
	628306AM	Clutch Servo	
	626785AM	628306AM	Clutch Servo
626786AM	626964AM	Upgrade Kit	
	628306AM	Clutch Servo	
	AC135AK	076628001000	Rubber Parts
	AC135AY	076645001000	Spares Kit
	076645101000	Spares Kit	
	AC135AYK	076628001000	Rubber Parts
AC135AYZ	076628001000	Rubber Parts	
AC135AZ	076628001000	Rubber Parts	
AC135BXK	076628001000	Rubber Parts	
AC135BXZ	076628001000	Rubber Parts	
AC135BZ	076628001000	Rubber Parts	
AC135CZ	076628001000	Rubber Parts	
AC135FXK	076628001000	Rubber Parts	
AC135FXZ	076628001000	Rubber Parts	
AC135HY	076645001000	Spares Kit	
AC135HYK	076628001000	Rubber Parts	
AC135HYZ	076624101000	Complete Overhaul Kit	
	076628001000	Rubber Parts	
	AC135LYK	076628001000	Rubber Parts
AC135LYZ	076624101000	Complete Overhaul Kit	
	076628001000	Rubber Parts	
	AC136AZ	076628001000	Rubber Parts
AC152AA	076670801000	Spares Kit	
AC152DA	076670801000	Spares Kit	
AC152DX	076663501000	Spares Kit	
	076670801000	Spares Kit	
	AC152HA	076670801000	Spares Kit
AC152LA	076663501000	Spares Kit	
	076670801000	Spares Kit	
	AC156A	076630701000	Spares Kit
AC156B	076630701000	Spares Kit	
AC156C	076630701000	Spares Kit	
AC156D	076630701000	Spares Kit	
AC156E	076630701000	Spares Kit	
AC285B	076637301000	Spares Kit	
AC399A	076664801000	Spares Kit	
AC555A	076647401000	Complete Overhaul Kit	
AC555AK	076647401000	Complete Overhaul Kit	
AC560AA	076648802000	Rubber Parts	
	076656502000	Rubber Parts	
	076665204000	Complete Overhaul Kit	
	076673101000	Spares Kit	
AC560BAK	076648802000	Rubber Parts	
	076656502000	Rubber Parts	
	076665204000	Complete Overhaul Kit	
	076673101000	Spares Kit	
AC563BK	076648802000	Rubber Parts	
	076673101000	Spares Kit	
	AC784D	Test Connector	
AC570A	076664003000	Spares Kit	
AC570D	076664003000	Spares Kit	
AC570DX	076664003000	Spares Kit	
AC574A	076619301000	Complete Overhaul Kit	

Spares kits

Part Number	Kit Number	Description
AC574AX	076619301000	Complete Overhaul Kit
AC574AXY	076619301000	Complete Overhaul Kit
AC574AY	076619301000	Complete Overhaul Kit
AC574BX	076619301000	Complete Overhaul Kit
AC574BXY	076619301000	Complete Overhaul Kit
AC574BY	076619301000	Complete Overhaul Kit
AC574BYW	076619301000	Complete Overhaul Kit
AC574BYZ	076619301000	Complete Overhaul Kit
AC574CXY	076619301000	Complete Overhaul Kit
AC581A	076663801000	Spares Kit
AC586A	076662903000	Complete Overhaul Kit
	076683202000	Rubber Parts
AC586AA	076662903000	Complete Overhaul Kit
	076683202000	Rubber Parts
AC586AAX	076662903000	Complete Overhaul Kit
	076683202000	Rubber Parts
AC586AX	076662903000	Complete Overhaul Kit
	076683202000	Rubber Parts
AC586AY	076662903000	Complete Overhaul Kit
	076683202000	Rubber Parts
AC595A	076665904000	Spares Kit
	076666004000	Complete Overhaul Kit
AC595B	076665904000	Spares Kit
	076666004000	Complete Overhaul Kit
AC595C	076666004000	Complete Overhaul Kit
AC595F	076647002000	Complete Overhaul Kit
AC596A	076617801000	Complete Overhaul Kit
AC597A	076617501000	Spares Kit
AC597B	076617501000	Spares Kit
AC597BA	076617501000	Spares Kit
AC597C	076617501000	Spares Kit
AC597D	076617501000	Spares Kit
AC62ZAG	076623601000	Gasket Set
	076624301000	Valve Plate
	076624401000	Cylinder Head
	076633901000	Piston Rings (65,5mm)
	076634001000	Piston Rings (65mm)
	076634101000	Oversize Piston (65,5mm)
	076660501000	Valve Plate
	076670702000	Piston Rod
AC63ZA	076623501000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
	076660701000	Piston Rings (70mm)
	076670702000	Piston Rod
	076698101000	Oversize Piston
AC63ZAG	076623501000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076670702000	Piston Rod
	076698101000	Oversize Piston
AC63ZB	076623501000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
	076660701000	Piston Rings (70mm)
	076670702000	Piston Rod
	076698101000	Oversize Piston
AC63ZBG	076623501000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
	076660701000	Piston Rings (70mm)
	076670702000	Piston Rod
	076698101000	Oversize Piston

Part Number	Kit Number	Description
AC64ZCG	076623401000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076670702000	Piston Rod
	076698101000	Oversize Piston
AC64ZD	076623401000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
	076660701000	Piston Rings (70mm)
	076670702000	Piston Rod
	076698101000	Oversize Piston
AC64ZDG	076623401000	Gasket Set
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
	076660701000	Piston Rings (70mm)
	076670702000	Piston Rod
	076698101000	Oversize Piston
AC67AZG	076617701000	Oversize Piston (80,5mm)
	076623101000	Valve Plate Assembly
	076623201000	Cylinder Head
	076623301000	Gasket Set
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076633401000	Oversize Piston
	076633501000	Piston Assembly
	076660301000	Valve Plate
	076670702000	Piston Rod
AC75A	076622702000	Cylinder Head
	076622802000	Gasket
	076632301000	Oversize Piston (80,5mm)
	076632401000	Oversize Piston
	076632501000	Piston Assembly
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076660301000	Valve Plate
	076670702000	Piston Rod
ACX61ZA	076624301000	Valve Plate
	076624401000	Cylinder Head
	076624501000	Gasket Set
	076633901000	Piston Rings (65,5mm)
	076634001000	Piston Rings (65mm)
	076634101000	Oversize Piston (65,5mm)
	076660501000	Valve Plate
	076670702000	Piston Rod
ACX61ZAG	076624301000	Valve Plate
	076624401000	Cylinder Head
	076624501000	Gasket Set
	076633901000	Piston Rings (65,5mm)
	076634001000	Piston Rings (65mm)
	076634101000	Oversize Piston (65,5mm)
	076660501000	Valve Plate
	076670702000	Piston Rod
ACX61ZC	076624301000	Valve Plate
	076624401000	Cylinder Head
	076624501000	Gasket Set
	076633901000	Piston Rings (65,5mm)
	076634001000	Piston Rings (65mm)
	076634101000	Oversize Piston (65,5mm)
	076660501000	Valve Plate
	076670702000	Piston Rod
ACX61ZCG	076624301000	Valve Plate
	076624401000	Cylinder Head

Spares kits

Part Number	Kit Number	Description
ACX61ZCG	076624501000	Gasket Set
	076633901000	Piston Rings (65,5mm)
	076634001000	Piston Rings (65mm)
	076634101000	Oversize Piston (65,5mm)
	076660501000	Valve Plate
ACX66B	076670702000	Piston Rod
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
	076660701000	Piston Rings (70mm)
ACX66BG	076670702000	Piston Rod
	076698101000	Oversize Piston
	076624601000	Valve Plate
	076624701000	Cylinder Head
	076660401000	Valve Plate
ACX67A	076660701000	Piston Rings (70mm)
	076670702000	Piston Rod
	076698101000	Oversize Piston
	076617701000	Oversize Piston (80,5mm)
	076622501000	Gasket Set
ACX67AA	076623101000	Valve Plate Assembly
	076623201000	Cylinder Head
	076633501000	Piston Assembly
	076670702000	Piston Rod
	076617701000	Oversize Piston (80,5mm)
ACX67AAG	076622501000	Gasket Set
	076623101000	Valve Plate Assembly
	076623201000	Cylinder Head
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
ACX67BA	076633501000	Piston Assembly
	076660301000	Valve Plate
	076670702000	Piston Rod
	076617701000	Oversize Piston (80,5mm)
	076622501000	Gasket Set
ACX67BAG	076623101000	Valve Plate Assembly
	076623201000	Cylinder Head
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076633401000	Oversize Piston
	076633501000	Piston Assembly
	076660301000	Valve Plate
	076670702000	Piston Rod
	076617701000	Oversize Piston (80,5mm)
	076622501000	Gasket Set
	076623101000	Valve Plate Assembly
	076623201000	Cylinder Head
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076633401000	Oversize Piston
	076633501000	Piston Assembly
	076660301000	Valve Plate
	076670702000	Piston Rod

Part Number	Kit Number	Description
ACX68A	075521210000	Seal Ring
	076618001000	Cylinder Head
	076618101000	Valve Plate
	076618201000	Gasket Set
	076618501000	Oversize Piston (65,5mm)
ACX68AS	076618601000	Piston Assembly
	076670702000	Piston Rod
	075521210000	Seal Ring
	076618001000	Cylinder Head
	076618101000	Valve Plate
ACX68D	076618201000	Gasket Set
	076618501000	Oversize Piston (65,5mm)
	076618601000	Piston Assembly
	076633901000	Piston Rings (65,5mm)
	076634001000	Piston Rings (65mm)
ACX69A	076634101000	Oversize Piston (65,5mm)
	076670702000	Piston Rod
	075521210000	Seal Ring
	076618001000	Cylinder Head
	076618101000	Valve Plate
ACX69AS	076618201000	Gasket Set
	076618501000	Oversize Piston (65,5mm)
	076618601000	Piston Assembly
	076670702000	Piston Rod
	075521210000	Seal Ring
ACX69CX	076617101000	Cylinder Head
	076617201000	Valve Plate
	076617301000	Gasket Set
	076617701000	Oversize Piston (80,5mm)
	076670702000	Piston Rod
ACX69D	075521210000	Seal Ring
	076617101000	Cylinder Head
	076617201000	Valve Plate
	076617301000	Gasket Set
	076617701000	Oversize Piston (80,5mm)
ACX69DX	076670702000	Piston Rod
	075521210000	Seal Ring
	076617101000	Cylinder Head
	076617201000	Valve Plate
	076617301000	Gasket Set
ACX75ZF	076617701000	Oversize Piston (80,5mm)
	076670702000	Piston Rod
	076622702000	Cylinder Head
	076632301000	Oversize Piston (80,5mm)
	076632401000	Oversize Piston
	076632501000	Piston Assembly
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076660301000	Valve Plate
	076670702000	Piston Rod

Spares kits

Part Number	Kit Number	Description
ACX75ZF	076670702000	Piston Rod
ACX75ZFG	076622402000	Gasket Set
	076622602000	Valve Plate Assembly
	076622702000	Cylinder Head
	076632301000	Oversize Piston (80,5mm)
	076632401000	Oversize Piston
	076632501000	Piston Assembly
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076660301000	Valve Plate
	076670702000	Piston Rod
ACX75ZG	076632301000	Oversize Piston (80,5mm)
	076632501000	Piston Assembly
	076660301000	Valve Plate
	076670702000	Piston Rod
ACX75ZGG	076622402000	Gasket Set
	076622602000	Valve Plate Assembly
	076622702000	Cylinder Head
	076632301000	Oversize Piston (80,5mm)
	076632501000	Piston Assembly
	076670702000	Piston Rod
ACX76ZB	076625201000	Cylinder Head
	076628601000	Gasket Set
	076632301000	Oversize Piston (80,5mm)
	076632501000	Piston Assembly
	076670702000	Piston Rod
ACX79CG	076622402000	Gasket Set
	076622602000	Valve Plate Assembly
	076622702000	Cylinder Head
	076632301000	Oversize Piston (80,5mm)
	076632401000	Oversize Piston
	076632501000	Piston Assembly
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076660301000	Valve Plate
	076670702000	Piston Rod
ACX80A	076617701000	Oversize Piston (80,5mm)
	076633501000	Piston Assembly
	076670702000	Piston Rod
ACX80AA	076617701000	Oversize Piston (80,5mm)
	076625201000	Cylinder Head
	076628601000	Gasket Set
	076633501000	Piston Assembly
	076670702000	Piston Rod
ACX82A	076617701000	Oversize Piston (80,5mm)
	076625201000	Cylinder Head
	076628601000	Gasket Set
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076633401000	Oversize Piston
	076633501000	Piston Assembly
	076670702000	Piston Rod
ACX82AS	076617701000	Oversize Piston (80,5mm)
	076625201000	Cylinder Head
	076628601000	Gasket Set
	076633001000	Piston Rings (80,5mm)
	076633101000	Spares Kit
	076633201000	Piston Rings (80mm)
	076633401000	Oversize Piston
	076633501000	Piston Assembly
	076670702000	Piston Rod
ACX83A	075314713000	Thrust Washer
	075473711000	Bearing Bushings Kit

Part Number	Kit Number	Description
ACX83A	075521210000	Seal Ring
	076625201000	Cylinder Head
	076628601000	Gasket Set
	076629101000	Oversize Piston
	076629301000	Piston Assembly
	076670702000	Piston Rod
ACX83AS	075314713000	Thrust Washer
	075473711000	Bearing Bushings Kit
	075521210000	Seal Ring
	076625201000	Cylinder Head
	076628601000	Gasket Set
	076628901000	Spares Kit
	076629001000	Piston Rings (82mm)
	076629101000	Oversize Piston
	076629301000	Piston Assembly
	076670702000	Piston Rod
ACX83B	075314713000	Thrust Washer
	075473711000	Bearing Bushings Kit
	075863001000	Sealing Cover
	076625201000	Cylinder Head
	076628601000	Gasket Set
	076629101000	Oversize Piston
	076629301000	Piston Assembly
	076670702000	Piston Rod
ACX83D	075314713000	Thrust Washer
	075473711000	Bearing Bushings Kit
	075863001000	Sealing Cover
	076615201000	Gasket Set
	076615301000	Oversize Piston
	076615401000	Piston Assembly
	076615501000	Cylinder Head
	076670702000	Piston Rod
ACX83DK	075314713000	Thrust Washer
	075473711000	Bearing Bushings Kit
	076615201000	Gasket Set
	076615301000	Oversize Piston
	076615401000	Piston Assembly
	076615501000	Cylinder Head
	076670702000	Piston Rod
ACX83DX	075314713000	Thrust Washer
	075473711000	Bearing Bushings Kit
	075863001000	Sealing Cover
	076615201000	Gasket Set
	076615301000	Oversize Piston
	076615401000	Piston Assembly
	076615501000	Cylinder Head
	076670702000	Piston Rod
BFM105CXK	SKM2984/1	Service Kit
BFM105DXK	SKM2984/1	Service Kit
BFM121BK	SKM2984/1	Service Kit
BFM121BXK	234226K	Diaphragm
	SKM2984/1	Service Kit
BFM121CK	234226K	Diaphragm
	SKM2984/1	Service Kit
BFM121CXK	SKM2984/1	Service Kit
BFM121EK	SKM2984/1	Service Kit
BFM122BK	SKM2984/1	Service Kit
BFM141BK	234099K	Diaphragm
CPC53C	076655801000	Complete Overhaul Kit
CPE203C	076654401000	Complete Overhaul Kit
CPE203CS	076654401000	Complete Overhaul Kit
CPE205B	076654101000	Complete Overhaul Kit
CPE205BS	076654101000	Complete Overhaul Kit
DPM40A	076680001000	Spares Kit
DPM40C	076666503000	Spares Kit
DPM40CA	076666503000	Spares Kit

Spares kits

Part Number	Kit Number	Description
DPM43A	076680001000	Spares Kit
DPM43C	076666503000	Spares Kit
	076680001000	Spares Kit
DPM43CA	076666503000	Spares Kit
	076680001000	Spares Kit
DPM81A	076643401000	Spares Kit
DPM81AY	076643401000	Spares Kit
DPM81BA	076643401000	Spares Kit
DPM82AK	076643901000	Spares Kit
DPM84A	076643401000	Spares Kit
	076643901000	Spares Kit
DPM84AX	076643401000	Spares Kit
	076643901000	Spares Kit
DPM84C	076643401000	Spares Kit
	076643901000	Spares Kit
DPM84CX	076643901000	Spares Kit
DPM84CY	076643401000	Spares Kit
	076643901000	Spares Kit
DPM86AA	076643401000	Spares Kit
DPM94A	076635301000	Spares Kit
DPM94AA	076635301000	Spares Kit
DPM94AAX	075830201000	Microswitch Unit
DPM95A	076635101000	Spares Kit
DPM95AA	076635101000	Spares Kit
DPM95AAX	075830201000	Microswitch Unit
DR31RAK	076653801000	Complete Overhaul Kit
	076699601000	Rubber Parts
DR31RCK	076653801000	Complete Overhaul Kit
DR31RDK	076653801000	Complete Overhaul Kit
	076699601000	Rubber Parts
DR31REK	076653801000	Complete Overhaul Kit
	076699601000	Rubber Parts
DR32A	076653701000	Complete Overhaul Kit
DR32C	076653701000	Complete Overhaul Kit
DR32D	076653401000	Rubber Parts
	076653701000	Complete Overhaul Kit
DR33A	076653201000	Rubber Parts
	076653501000	Complete Overhaul Kit
DR33B	076653201000	Rubber Parts
	076653501000	Complete Overhaul Kit
DR40A	076653401000	Rubber Parts
	076653701000	Complete Overhaul Kit
DR40AA	076653401000	Rubber Parts
	076653701000	Complete Overhaul Kit
DR40B	076653401000	Rubber Parts
	076653701000	Complete Overhaul Kit
DX10A	076657401000	Complete Overhaul Kit
DX16C	076659501000	Complete Overhaul Kit
DX16D	076659501000	Complete Overhaul Kit
	076685701000	Rubber Parts
DX16DY	075617901000	Cover
	076659501000	Complete Overhaul Kit
	076685701000	Rubber Parts
DX18A	076657001000	Spares Kit
DX19A	076685701000	Rubber Parts
DX19B	076685701000	Rubber Parts
DX25A	076657001000	Spares Kit
DX26A	076651802000	Valve Kit
	076657802000	Rubber Parts
	076659302000	Complete Overhaul Kit
DX26B	076651802000	Valve Kit
	076657902000	Rubber Parts
DX28A	076685701000	Rubber Parts
DX31A	076657001000	Spares Kit
DX35A	076642901000	Spares Kit
DX50AX	076640705000	Complete Overhaul Kit

Part Number	Kit Number	Description
DX50AX	076641201000	Rubber Parts
	076645704000	Filter
	076649601000	Microswitch Unit
DX51CX	076640405000	Complete Overhaul Kit
	076641001000	Rubber Parts
	076645704000	Filter
	076649201000	Microswitch Unit
DX52B	076649001000	Rubber Parts
DX52BX	076640605000	Complete Overhaul Kit
	076640901000	Rubber Parts
	076645704000	Filter
	076649201000	Microswitch Unit
DX52BY	076640605000	Complete Overhaul Kit
	076640901000	Rubber Parts
	076645704000	Filter
	076649201000	Microswitch Unit
DX53AX	076640405000	Complete Overhaul Kit
	076641001000	Rubber Parts
	076645704000	Filter
	076649201000	Microswitch Unit
DX60A	075858301000	Microswitch Unit
DX65A	075858301000	Microswitch Unit
DX70C	076619601000	Seal Kit
	076630802000	Complete Overhaul Kit
DX71A	076619501000	Complete Overhaul Kit
DX71BX	076619501000	Complete Overhaul Kit
DX71BY	076628302000	Service Kit
DX75A	075743201000	Microswitch Unit
	076638403000	Complete Overhaul Kit
	076638503000	Rubber Parts
DX75B	075743201000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX75BA	075743201000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX75BAY	075743201000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX75BX	075858301000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX75BXY	075858301000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX76A	075858301000	Microswitch Unit
DX80D	076637004000	Complete Overhaul Kit
DX81D	076638802000	Rubber Parts
DX81E	076638802000	Rubber Parts
DX95A	075743201000	Microswitch Unit
	076638403000	Complete Overhaul Kit
	076638503000	Rubber Parts
DX95B	075743201000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX95BX	075858301000	Microswitch Unit
	076619902000	Complete Overhaul Kit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX95BXY	075858301000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX95BY	075743201000	Microswitch Unit
	076620002000	Rubber Parts
	076620102000	Service Kit
DX95E	075743201000	Microswitch Unit

Spares kits



Part Number	Kit Number	Description
DX95E	076619902000	Complete Overhaul Kit
DX95EX	075858301000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX95EXY	075858301000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX95EY	075743201000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX95F	075743201000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX95FX	075858301000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX95FXY	075858301000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX95FY	075743201000	Microswitch Unit
	076619902000	Complete Overhaul Kit
DX9A	076657601000	Spares Kit
EF105AX	234226K	Diaphragm
	SKM2984/1	Service Kit
EF105BY	234226K	Diaphragm
	SKM2984/2	Service Kit
EF105CX	234226K	Diaphragm
	SKM2984/1	Service Kit
EF105FY	234226K	Diaphragm
	SKM2984/2	Service Kit
EF120AB	234226K	Diaphragm
	SKM2984/1	Service Kit
	SKM2989/1	Diaphragm and boot kit
EF120C	234226K	Diaphragm
	SKM2984/1	Service Kit
EF120D	234226K	Diaphragm
	SKM2984/1	Service Kit
	SKM2989/1	Diaphragm and boot kit
EF120E	234226K	Diaphragm
	SKM2984/1	Service Kit
	SKM2989/1	Diaphragm and boot kit
EF120F	234226K	Diaphragm
	SKM2984/1	Service Kit
EF120FY	234226K	Diaphragm
	SKM2984/2	Service Kit
EF120HX	234226K	Diaphragm
	SKM2984/1	Service Kit
EF120HY	234226K	Diaphragm
	SKM2984/2	Service Kit
EF120L	234226K	Diaphragm
	SKM2984/1	Service Kit
	SKM2989/1	Diaphragm and boot kit
EF120N	234226K	Diaphragm
	SKM2984/1	Service Kit
EF120P	234226K	Diaphragm
	SKM2984/1	Service Kit
EF141BY	234189K	Diaphragm
	SKM3006/1	Service Kit
EF141FY	234189K	Diaphragm
	SKM3006/1	Service Kit
EF161FY	234189K	Diaphragm
	SKM3006/1	Service Kit
EF180BY	234189K	Diaphragm
	SKM3006/1	Service Kit
EF180HY	234189K	Diaphragm
	SKM3006/1	Service Kit
EF201BY	234099K	Diaphragm
	SKM2988/1	Service Kit
EF201LA	234099K	Diaphragm
EF201LY	234099K	Diaphragm
	SKM2988/1	Service Kit
EF221BY	234099K	Diaphragm

Part Number	Kit Number	Description
EF221BY	SKM2988/1	Service Kit
EF221LY	234099K	Diaphragm
	SKM2988/1	Service Kit
EF241LY	234100K	Diaphragm
	SKM2990/1	Service Kit
EF241MY	234100K	Diaphragm
	SKM2990/1	Service Kit
EF241QA	234100K	Diaphragm
EF620A	20LS	Diaphragm
EF620AY	075818801000	Master Cylinder
	20LS	Diaphragm
EF624A	24LS	Diaphragm
EF624AK	1189421	Master Cylinder
	24LS	Diaphragm
EF624AW	24LS	Diaphragm
EF624AX	075818801000	Master Cylinder
	24LS	Diaphragm
EF624AY	075818801000	Master Cylinder
	24LS	Diaphragm
EF624BY	24LS	Diaphragm
EF90AB	234433K	Diaphragm
EF90AY	234433K	Diaphragm
EF90C	234433K	Diaphragm
EF90EX	234433K	Diaphragm
EF90EY	234433K	Diaphragm
EF90YE	234433K	Diaphragm
EM3A	076645401000	Complete Overhaul Kit
EM3B	076645401000	Complete Overhaul Kit
I11443	I12770	Inlet Control Valve
I11482	I12770	Inlet Control Valve
	I35836	Piston And Cylinder
	I738430051	Gasket Set
I13886	I77517	Spares Kit
I25513	I54255	Spares Kit
I27927	I54253	Spares Kit
I27929	I54253	Spares Kit
I28847	I54253	Spares Kit
I30062	I38951	Spares Kit
I33379	I54253	Spares Kit
I33540	I39885001	Thread Seal
I40719	I66577008	Spares Kit
I41333	I73908	Spares Kit
I41424	I54253	Spares Kit
I42387	I74017	Spares Kit
I42736	I55591	Spares Kit
I427361	I55591	Spares Kit
I46365	I463650051	Gasket Set
	I68094	Seal Kit
I46381	I55595	Spares Kit
I47823	I73908	Spares Kit
I47836	I478360051	Gasket Set
	I74151	Spares Kit
I48016	I68948	Spares Kit
I48198	I55591	Spares Kit
I50138	I54289	Unloader Kit
I50486	I67457	Spares Kit
I50993	I63633	Spares Kit
I54075	I77246	Piston And Cylinder
I54395	I543950051	Gasket Set
	I61090	Spares Kit
I54743	I69698	Spares Kit
I55133	I543950051	Gasket Set
	I61090	Spares Kit
I55719	I67711	Spares Kit
I55724	I59347	Spares Kit
I55749	I67587	Service Kit

Spares kits

Part Number	Kit Number	Description
I58477	I63743	Spares Kit
I58732	I63744	Spares Kit
I58733	I63746	Diaphragm
I58889	I29698	Reed Valve Kit
	I729510051	Gasket Set
	I811690062	Piston Rings (Std)
	SEB22066	Cylinder Head Assembly
I58921	I73908	Spares Kit
I58949	I66779	Spares Kit
I59456	I72281	Spares Kit
I60312	I29698	Reed Valve Kit
	I78098	Reed Valve Kit
	I78099	Reed Valve Kit
I60323	234433K	Diaphragm
	I63744	Spares Kit
I60324	B74479	Diaphragm
	I63746	Diaphragm
I60838	I63746	Diaphragm
I60966	I29698	Reed Valve Kit
	I729510051	Gasket Set
	I755660052	Gaskets
	I811690062	Piston Rings (Std)
	II39526F0061	Piston Rings
	SEB22066	Cylinder Head Assembly
I61235	I69749	Spares Kit
I61236	I69749	Spares Kit
I61237	I69749	Spares Kit
I61240	I69749	Spares Kit
I61241	I69749	Spares Kit
I61349	I80221	Spares Kit
I61423	I50428	Cylinder Body
I61707	I69749	Spares Kit
I61751	I73908	Spares Kit
I63354	I633540051	Gasket Set
	I80221	Spares Kit
I63724	I72376	Spares Kit
I63733	I66371	Spares Kit
I63753	I66371	Spares Kit
I63963	I69749	Spares Kit
I66005	234100K	Diaphragm
I66031	I69697	Spares Kit
I66032	I69698	Spares Kit
I66033	I67587	Service Kit
I66577	I66577008	Spares Kit
I66760	I74062	Spares Kit
I66845	I63744	Spares Kit
I66849	I29698	Reed Valve Kit
	I78098	Reed Valve Kit
	I78099	Reed Valve Kit
I67226	I72381	Spares Kit
I67388	I63745	Spares Kit
I67761	I63746	Diaphragm
I68180	I478360051	Gasket Set
	I74151	Spares Kit
I68206	I68094	Seal Kit
I68649	I77450	Spares Kit
I68675	I77450	Spares Kit
I68911	I689110051	Gasket Set
	I72375	Spares Kit
I69281	I81532	Spares Kit
I69324	I74651	Spares Kit
I69652	I74986	Spares Kit
I69856	I81990	Diaphragm
I69857	I81990	Diaphragm
I69858	I81990	Diaphragm
I69860	I81990	Diaphragm

Part Number	Kit Number	Description
I69861	I81990	Diaphragm
I69864	I81990	Diaphragm
I69866	I81990	Diaphragm
I70615	I706150051	Gasket Set
	I81171	Seal Kit
I70676	I72281	Spares Kit
I70694	I63746	Diaphragm
I71042	I29698	Reed Valve Kit
	I729510051	Gasket Set
	I755660052	Gaskets
	I811690062	Piston Rings (Std)
	II39526F0061	Piston Rings
	SEB22066	Cylinder Head Assembly
I71052	I543950051	Gasket Set
	I61090	Spares Kit
I710521	I543950051	Gasket Set
	I61090	Spares Kit
I71252	I75090	Spares Kit
I71268	I72376	Spares Kit
I71315	I54253	Spares Kit
I71347	I77450	Spares Kit
I71352	I87670	Spares Kit
I71532	I74984	Spares Kit
I72507	I76992	Spares Kit
I72780	I72669	Spares Kit
I72791	I70963	Spares Kit
I72870	I76010	Spares Kit
I73207A	I76749	Spares Kit
I73322	B71093	Dust Bellows
	I76621	Diaphragm & Dust Cover
I73329	I78183	Spares Kit
I73335	I63746	Diaphragm
I73358	I76255	Spares Kit
I73584	I71243	Piston And Cylinder
	I726740051	Gasket Set
	I735840052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
I73649	B47837	Spiral Spring
	I736490061	Diaphragm & Dust Cover
	I736490062	Seal Kit
	I742520051	Gasket Set
I73832	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
I74054	I70963	Spares Kit
I74159	I76621	Diaphragm & Dust Cover
	I86688004	Bellows
I74214	B47837	Spiral Spring
	I736490061	Diaphragm & Dust Cover
	I736490062	Seal Kit
	I742520051	Gasket Set
I74215	B47837	Spiral Spring
	I736490061	Diaphragm & Dust Cover
	I736490062	Seal Kit
	I742520051	Gasket Set
I74217	B47837	Spiral Spring
	I736490061	Diaphragm & Dust Cover
	I736490062	Seal Kit
	I742520051	Gasket Set
I74252	B47837	Spiral Spring
	I736490061	Diaphragm & Dust Cover
	I736490062	Seal Kit
	I742520051	Gasket Set

Spares kits

Part Number	Kit Number	Description
I74772	I84021	Spares Kit
I74789	I76011	Spares Kit
I74907	I80450	Spares Kit
I74908	I72281	Spares Kit
I74963	I83419	Spares Kit
I74971	I76535	Spares Kit
I74972	I76535	Spares Kit
I75222	I771060051	Gasket Set
	I771060052	Gaskets
	II38717F004	Reed Valve Kit
I75226	I76172	Spares Kit
I75266	I86687004	Bellows
	I89162	Spares Kit
I75267	234099K	Diaphragm
	I86687004	Bellows
	I89162	Spares Kit
I75268	I86687004	Bellows
	I89162	Spares Kit
I75269	I86687004	Bellows
	I89162	Spares Kit
I75300	I706150051	Gasket Set
	I81171	Seal Kit
I75321	I77188	Spares Kit
I75356	I81990	Diaphragm
I75358	I81990	Diaphragm
I75516	I771060051	Gasket Set
	I771060052	Gaskets
	II38717F004	Reed Valve Kit
I75547	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
I75551	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	II38717F004	Reed Valve Kit
I75566	I245280061	Piston Rings
	I729510051	Gasket Set
	I755660052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
	SEB22066	Cylinder Head Assembly
I75596	I706150051	Gasket Set
	I81171	Seal Kit
I75658	I729510051	Gasket Set
	I755660052	Gaskets
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
	SEB22066	Cylinder Head Assembly
I75749	I66577008	Spares Kit
I75792	I63746	Diaphragm
I75798	I71208	Spares Kit
I75804	I72376	Spares Kit
I75987	I245280061	Piston Rings
	I729510051	Gasket Set
	I755660052	Gaskets
	II38714F004	Reed Valve Kit
	SEB22066	Cylinder Head Assembly
I75988	I245280061	Piston Rings
	I729510051	Gasket Set
	I755660052	Gaskets
	II38714F004	Reed Valve Kit
	SEB22066	Cylinder Head Assembly
I76014	I78315	Spares Kit
I76069	I755660052	Gaskets
	I811690062	Piston Rings (Std)

Part Number	Kit Number	Description
I76069	I84870004	Reed Valve Kit
	I850280051	Gasket Set
I76112	I72290	Spares Kit
I76121	I72290	Spares Kit
I76202	I82546	Spares Kit
I76204	I68094	Seal Kit
I76261	I76261008	Spares Kit
I76269	I73908	Spares Kit
I76270	I73908	Spares Kit
I76271	I73908	Spares Kit
I76272	I73908	Spares Kit
I76275	I75238	Spares Kit
I76333	I77188	Spares Kit
I76334	II38717F004	Reed Valve Kit
I76370	I77188	Spares Kit
I76410	I78847	Spares Kit
I76452	I72401	Spares Kit
I764521	I72401	Spares Kit
I76463	I72473	Spares Kit
I76512	I77398	Spares Kit
I76513	I71208	Spares Kit
	I77398	Spares Kit
I76624	I83121	Spares Kit
I76647	I83419	Spares Kit
I76766	I765360051	Gasket Set
	I765360052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
I76792	I68094	Seal Kit
I76833	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I76875	B47837	Spiral Spring
	I892390062	Spares Kit
I76897	I768330061	Diaphragm & Dust Cover
I76938	I80221	Spares Kit
I77096	I768330061	Diaphragm & Dust Cover
I77106	I771060051	Gasket Set
	I771060052	Gaskets
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
	SEB22162	Spares Kit
I77107	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
	SEB22162	Spares Kit
I77243	I80448	Seal Kit
I77419	I77419008	Spares Kit
I77420	I77065	Spares Kit
I77451	I80448	Seal Kit
I77568	I771060051	Gasket Set
	II38717F004	Reed Valve Kit
I77617	I81985	Spares Kit
I77618	I81985	Spares Kit
I77743	234099K	Diaphragm
	B71093	Dust Bellows
I77744	I76621	Diaphragm & Dust Cover
	I86688004	Bellows
I77762	I82546	Spares Kit
I77763	I633540051	Gasket Set
	I80221	Spares Kit
I78042	I63744	Spares Kit

Spares kits

Part Number	Kit Number	Description
I78141	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	II38717F004	Reed Valve Kit
	SEB22160	Spares Kit
	SEB22161	Spares Kit
I78406	I81594	Spares Kit
I78418	I82896	Spares Kit
I78491	B71093	Dust Bellows
	I84977	Spares Kit
I78515	I771060051	Gasket Set
	I771060052	Gaskets
	II38717F004	Reed Valve Kit
	SEB22162	Spares Kit
I78516	I771060051	Gasket Set
	I771060052	Gaskets
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
	SEB22162	Spares Kit
I78519	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
	SEB22162	Spares Kit
I78861	I80007	Spares Kit
I78888	I76255	Spares Kit
I78976	I789790061	Piston And Cylinder
	I810890052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
	SEB22062	Spares Kit
I79023	I543950051	Gasket Set
	I61090	Spares Kit
I79054	I69784	Service Kit
I79056	I81234	Spares Kit
I79195	I12770	Inlet Control Valve
	I35836	Piston And Cylinder
	I738430051	Gasket Set
I79379	I78183	Spares Kit
I79444	I80448	Seal Kit
I79512	I84518	Seal Kit
I79644	I84528	Spares Kit
I80004	I81611	Spares Kit
	SEB22121	Spares Kit
I80086	I69784	Service Kit
I80091	I69784	Service Kit
I80093	I74651	Spares Kit
I80145	I78486	Spares Kit
I80147	I78486	Spares Kit
I80151	I78486	Spares Kit
I80152	I78485	Spares Kit
	I801530051	Spares Kit
I80153	I78485	Spares Kit
	I801530051	Spares Kit
I80157	I78485	Spares Kit
	I801530051	Spares Kit
I80190	I706150051	Gasket Set
	I81171	Seal Kit
I80214	I729510051	Gasket Set
	I755660052	Gaskets
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
I80239	I771060051	Gasket Set

Part Number	Kit Number	Description
I80239	I771060052	Gaskets
	I77246	Piston And Cylinder
	SEB22161	Spares Kit
I80253	I768330061	Diaphragm & Dust Cover
I80255	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I80256	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I80260	234189K	Diaphragm
	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I80262	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I80263	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I80264	B47837	Spiral Spring
	I736490062	Seal Kit
I80265	B47837	Spiral Spring
I80267	B47837	Spiral Spring
I80268	B47837	Spiral Spring
	I736490062	Seal Kit
I80269	B47837	Spiral Spring
	I736490062	Seal Kit
I80270	B47837	Spiral Spring
	I892390062	Spares Kit
I80271	B47837	Spiral Spring
	I892390062	Spares Kit
I80272	I892380061	Spares Kit
	I892390062	Spares Kit
I80275	I829190051	Spares Kit
I80426	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I80509	I83840	Spares Kit
I80549	I887830051	Gasket Set
I80582	B47837	Spiral Spring
I80653	I82652	Spares Kit
I80655	I82652	Spares Kit
I80657	I82652	Spares Kit
I80864	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I81169	Piston
	I811690062	Piston Rings (Std)
	I879040052	Gaskets
	II38714F004	Reed Valve Kit
I81040	I77188	Spares Kit
I81089	I789790061	Piston And Cylinder
	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I810890052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
I81156	I789790061	Piston And Cylinder
	I803980061	Reed Valve Kit

Spares kits

Part Number	Kit Number	Description
I81156	I810890051	Gasket Set
	I810890052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
I81192	I80448	Seal Kit
I81235	B47837	Spiral Spring
I81272	I706150051	Gasket Set
	I81171	Seal Kit
I81510	I706150051	Gasket Set
	I81171	Seal Kit
I81522	I81171	Seal Kit
I81523	I706150051	Gasket Set
	I81171	Seal Kit
I81595	I815950051	Gasket Set
	I87895	Spares Kit
I81712	I83842	Spares Kit
	SEB22122	Spares Kit
I81800	I68094	Seal Kit
I81946	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
I82046	I86075	Spares Kit
I82111	I77449	Spares Kit
I82170	I72371	Service Kit
I82171	I72371	Service Kit
I82172	I72371	Service Kit
I82174	I72371	Service Kit
I82175	I72371	Service Kit
I82242	B47837	Spiral Spring
I82290	I86741	Spares Kit
I82291	I86741	Spares Kit
	I88269004	Cover
I82293	I86741	Spares Kit
I82342	I87546	Spares Kit
	I903090051	Gasket Set
I82352	I84368	Spares Kit
I82387	I86741	Spares Kit
I82388	I86741	Spares Kit
I82389	I86741	Spares Kit
I82413	I84013	Seal Kit
I82414	I84013	Seal Kit
I82454	I69697	Spares Kit
I82456	I69784	Service Kit
I82587	I83840	Spares Kit
I82646	I84518	Seal Kit
I82811	I88834	Unloader Kit
I82812	I88833	Spares Kit
I82813	I88834	Unloader Kit
I82816	I87546	Spares Kit
	I903090051	Gasket Set
I82818	I88833	Spares Kit
I82919	I829190051	Spares Kit
I83032	I245280061	Piston Rings
	I29698	Reed Valve Kit
	I81169	Piston
	I811690062	Piston Rings (Std)
	SEB22074	Spares Kit
	SEB22086	Spares Kit
I83048	I86741	Spares Kit
I83280	I84613	Spares Kit
	I935810051	Gasket Set
I83313	I706150051	Gasket Set
	I81171	Seal Kit
I83345	I83345008	Spares Kit

Part Number	Kit Number	Description
I83345	I935810051	Gasket Set
I83347	I84881	Spares Kit
I83409	I88834	Unloader Kit
I83460	I755660052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	I850280051	Gasket Set
I83478	I829190051	Spares Kit
I83509	I768330061	Diaphragm & Dust Cover
I83510	I768330061	Diaphragm & Dust Cover
I83512	B47837	Spiral Spring
	I892390062	Spares Kit
I83531	B47837	Spiral Spring
I83538	B47837	Spiral Spring
	I736490062	Seal Kit
I83539	I77246	Piston And Cylinder
	I804080061	Reed Valve Kit
	I810580052	Gaskets
	I887830051	Gasket Set
	II38717F004	Reed Valve Kit
I83560	B47837	Spiral Spring
I83561	B47837	Spiral Spring
I83640	I69784	Service Kit
I83699	I69784	Service Kit
I83747	I69749	Spares Kit
I83843	I12770	Inlet Control Valve
	I35836	Piston And Cylinder
	I738430051	Gasket Set
I83874	I78185	Spares Kit
	I838740051	Gasket Set
I84034	I815950051	Gasket Set
	I87895	Spares Kit
I84103	I87259	Spares Kit
I84127	I87703	Spares Kit
I84208	B47837	Spiral Spring
	I736490062	Seal Kit
	I742520051	Gasket Set
	I768330061	Diaphragm & Dust Cover
I84249	I78486	Spares Kit
I84253	I92903	Service Kit
I84293	B47837	Spiral Spring
I84451	I84451008	Complete Overhaul Kit
I84567	I86077	Spares Kit
I84644	I72371	Service Kit
I84709	I77188	Spares Kit
I84808	I84808008	Spares Kit
I84828	I85667	Spares Kit
I84866	I84021	Spares Kit
I84927	I84528	Spares Kit
I85000	I88835	Unloader Kit
I85028	I69824004	Cylinder Head
	I81169	Piston
	I811690062	Piston Rings (Std)
	I850280051	Gasket Set
	I850280052	Gaskets
I85051	I801770061	Piston Rings
	I850280052	Gaskets
I85051000	I801770061	Piston Rings
I85083	B47837	Spiral Spring
I85133	I851330051	Gasket Set
	I87917	Service Kit
	II40100F	Filter Cartridge
I85139	I851390051	Gasket Set
	I90121	Seal Kit
	II40100F	Filter Cartridge
I85168	I82546	Spares Kit

Spares kits



Part Number	Kit Number	Description
I85209	I87259	Spares Kit
I85247	I76010	Spares Kit
	I87450	Spares Kit
I85435	I84368	Spares Kit
I85436	I84368	Spares Kit
I85439	B47837	Spiral Spring
I85510	I80448	Seal Kit
I85512	I78183	Spares Kit
I85513	I706150051	Gasket Set
	I81171	Seal Kit
I85656	I85667	Spares Kit
	I88269004	Cover
I85672	I88143	Spares Kit
I85690	B47837	Spiral Spring
I85698	I86534	Spares Kit
I85731	I74062	Spares Kit
I85883	I86534	Spares Kit
I85884	I93311	Spares Kit
I85919	I69784	Service Kit
I85943	B47837	Spiral Spring
	I87237	Spares Kit
I86003	I89162	Spares Kit
I86017	I68094	Seal Kit
I86030	II32765008	Spares Kit
I86107	I75090	Spares Kit
I86108	I75090	Spares Kit
I86132	B47837	Spiral Spring
I86133	B47837	Spiral Spring
I86155	I77439	Spares Kit
I86156	I77511	Spares Kit
I86158	I77439	Spares Kit
I86164	I771060051	Gasket Set
	I804080061	Reed Valve Kit
	I861640052	Gaskets
	II38717F004	Reed Valve Kit
I86170	I69749	Spares Kit
I86320	I820450062	Spares Kit
	I86074	Spares Kit
	I863190061	Spares Kit
I86321	I820450062	Spares Kit
I86322	I820450062	Spares Kit
I86323	I820450062	Spares Kit
I86324	I820450062	Spares Kit
I86620	I88833	Spares Kit
I86647	I87918	Service Kit
	II40100F	Filter Cartridge
I86679	I85667	Spares Kit
	I88269004	Cover
I86775	B47837	Spiral Spring
	I892390062	Spares Kit
	I90587	Diaphragm, Dust Cover & Seals
	I905870061	Diaphragm & Dust Cover
I86776	B47837	Spiral Spring
	I892390062	Spares Kit
	I90587	Diaphragm, Dust Cover & Seals
	I905870061	Diaphragm & Dust Cover
I86859	I88835	Unloader Kit
I86909	I801770061	Piston Rings
	I81015004	Valve Plate Assembly
	I810150061	Reed Valve Kit
	I869090051	Cylinder Head Gasket
	I869090052	Body & Base Gaskets
	SEB00626004	Con Rod Assembly
I86909000	I801770061	Piston Rings
	I81015004	Valve Plate Assembly
	I810150061	Reed Valve Kit

Part Number	Kit Number	Description
I86909000	SEB00626004	Con Rod Assembly
I87006	I81990	Diaphragm
I87074	I87287004	Heater Plug
	I87918	Service Kit
	II40100F	Filter Cartridge
I87076	I87919	Service Kit
	I93357004	Damper Plate
	II40100F	Filter Cartridge
I87101	I87287004	Heater Plug
	I87919	Service Kit
	I93357004	Damper Plate
	II40100F	Filter Cartridge
I87109	I89162	Spares Kit
I87162	I88315	Spares Kit
I87164	I84013	Seal Kit
	I88316	Spares Kit
I87496	I851390051	Gasket Set
	I87122004	Heater Plug
	I90121	Seal Kit
	II40100F	Filter Cartridge
I87501	I851330051	Gasket Set
	I87122004	Heater Plug
	I87917	Service Kit
	II40100F	Filter Cartridge
I87520	B47837	Spiral Spring
	I89035	Spares Kit
I87544	I771060051	Gasket Set
	I771060052	Gaskets
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
I87565	I87565008	Spares Kit
I87605	B47837	Spiral Spring
I87610	I89237	Spares Kit
I87671	I735840052	Gaskets
	I771060051	Gasket Set
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
I87674	I89237	Spares Kit
I87675	I89237	Spares Kit
I87734	I765360051	Gasket Set
	I765360052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	I877340061	Piston And Cylinder
I87755	I87912	Spares Kit
I87811	I78315	Spares Kit
I87819	I878190051	Spares Kit
	I87819008	Spares Kit
I87823	I69784	Service Kit
I87904	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I81169	Piston
	I811690062	Piston Rings (Std)
	I879040052	Gaskets
	II38714F004	Reed Valve Kit
I87920	I87918	Service Kit
	II40100F	Filter Cartridge
I879201	I87918	Service Kit
	II40100F	Filter Cartridge
I87950	I69784	Service Kit
I88036	I85667	Spares Kit
	I88269004	Cover
I88057	I69824004	Cylinder Head
	II38716F004	Valve Plate
I88061	I87546	Spares Kit
	I903090051	Gasket Set

Spares kits

Part Number	Kit Number	Description
I88094	I880940051	Gasket Set
	I90586	Seal Kit
I88182	I851330051	Gasket Set
	I87917	Service Kit
	I93357004	Damper Plate
	II40100F	Filter Cartridge
I88183	I851330051	Gasket Set
	I87287004	Heater Plug
	I87917	Service Kit
	II40100F	Filter Cartridge
I88252	I76621	Diaphragm & Dust Cover
I88336	I87546	Spares Kit
	I903090051	Gasket Set
I88438	I87546	Spares Kit
	I903090051	Gasket Set
I88439	I88834	Unloader Kit
I88447	B47837	Spiral Spring
I88474	I92903	Service Kit
I88477	I69824004	Cylinder Head
	I930790061	Reed Valve Kit
	II38715F004	Reed Valve Kit
I88478	I84021	Spares Kit
I88502	I851330051	Gasket Set
	I87917	Service Kit
	II40100F	Filter Cartridge
I88607	B47837	Spiral Spring
I88608	B47837	Spiral Spring
I88636	I820450062	Spares Kit
	I863190061	Spares Kit
I88637	I820450062	Spares Kit
	I863190061	Spares Kit
I88650	I93614	Spares Kit
I88675	I93311	Spares Kit
I88707	B47837	Spiral Spring
	I866000061	Spares Kit
I88708	B47837	Spiral Spring
I88768	I80448	Seal Kit
I88770	I77246	Piston And Cylinder
	I804080061	Reed Valve Kit
	I810580052	Gaskets
	I887830051	Gasket Set
	II38717F004	Reed Valve Kit
I88772	I851390051	Gasket Set
	I90121	Seal Kit
	II40100F	Filter Cartridge
I88782	I77246	Piston And Cylinder
	I887830051	Gasket Set
	II38717F004	Reed Valve Kit
	SEB22168	Spares Kit
I88783	I804080061	Reed Valve Kit
	I887830051	Gasket Set
	II38717F004	Reed Valve Kit
I88787	I755660052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	I850280051	Gasket Set
I88867	I851390051	Gasket Set
	I87122004	Heater Plug
	I90121	Seal Kit
	II40100F	Filter Cartridge
I89000	234189K	Diaphragm
	B71093	Dust Bellows
	I84977	Spares Kit
I89095	I87122004	Heater Plug
	I90121	Seal Kit
	II40100F	Filter Cartridge

Part Number	Kit Number	Description
I89242	I86741	Spares Kit
I89256	I851330051	Gasket Set
	I87122004	Heater Plug
	I87917	Service Kit
	II40100F	Filter Cartridge
I89257	I851330051	Gasket Set
	I87917	Service Kit
	II40100F	Filter Cartridge
I89258	I851330051	Gasket Set
	I87122004	Heater Plug
	I87917	Service Kit
	II40100F	Filter Cartridge
I89259	I851330051	Gasket Set
	I87917	Service Kit
	II40100F	Filter Cartridge
I89303	I789790061	Piston And Cylinder
	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I81169	Piston
	I811690062	Piston Rings (Std)
	II38714F004	Reed Valve Kit
I89326	I87122004	Heater Plug
	I87919	Service Kit
	II40100F	Filter Cartridge
I89397	I72371	Service Kit
I89398	I72371	Service Kit
I89614	I768330061	Diaphragm & Dust Cover
I89615	I768330061	Diaphragm & Dust Cover
I89741	I90120	Spares Kit
I89742	I90120	Spares Kit
I89776	I851330051	Gasket Set
	I87122004	Heater Plug
	I87917	Service Kit
	II40100F	Filter Cartridge
I89848	I92712	Spares Kit
I89873	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
	I898730052	Gaskets
I89875	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
	I898730052	Gaskets
I90081	I87122004	Heater Plug
	I87640008	Spares Kit
	II40100F	Filter Cartridge
I90125	B47837	Spiral Spring
I90150	B47837	Spiral Spring
I90151	B47837	Spiral Spring
I90156	I80448	Seal Kit
I90186	I85667	Spares Kit
	I88269004	Cover
I90309	I87546	Spares Kit
	I903090051	Gasket Set
I903091	I87546	Spares Kit
	I903090051	Gasket Set
I90313	I87546	Spares Kit
	I903090051	Gasket Set
I90360	I90694	Service Kit
I90361	I90694	Service Kit
I90375	I85667	Spares Kit
	I88269004	Cover

Spares kits

Part Number	Kit Number	Description
I90401	I77246	Piston And Cylinder
	I810580052	Gaskets
	I887830051	Gasket Set
	II38717F004	Reed Valve Kit
I90439	I87703	Spares Kit
I90452	I69784	Service Kit
I90474	I86074	Spares Kit
I90499	I801770061	Piston Rings
	I81015004	Valve Plate Assembly
	I810150061	Reed Valve Kit
	I869090051	Cylinder Head Gasket
	I869090052	Body & Base Gaskets
	SEB00626004	Con Rod Assembly
	SEB22135	Spares Kit
I90499000	I801770061	Piston Rings
	I81015004	Valve Plate Assembly
	I810150061	Reed Valve Kit
	I869090051	Cylinder Head Gasket
	I869090052	Body & Base Gaskets
	SEB00626004	Con Rod Assembly
	SEB22135	Spares Kit
I90573	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
I90631	I69784	Service Kit
I90706	I76992	Spares Kit
I90707	I76992	Spares Kit
I90708	I76992	Spares Kit
I90844	234099K	Diaphragm
I90860	B47837	Spiral Spring
I90908	I815950051	Gasket Set
	I90900	Spares Kit
I90912	B47837	Spiral Spring
I90913	B47837	Spiral Spring
I90921	I88315	Spares Kit
I90948	I90948008	Spares Kit
I90962	B71093	Dust Bellows
	I76621	Diaphragm & Dust Cover
I90967	B47837	Spiral Spring
I90976	I768330061	Diaphragm & Dust Cover
I90977	I768330061	Diaphragm & Dust Cover
I92013	I851330051	Gasket Set
	I87917	Service Kit
	I93357004	Damper Plate
	II40100F	Filter Cartridge
I92030	I72371	Service Kit
I92054	I84021	Spares Kit
I92062	B47837	Spiral Spring
	I866000061	Spares Kit
I92081	I87919	Service Kit
	I93357004	Damper Plate
	II40100F	Filter Cartridge
	I81169	Piston
I92089	I811690062	Piston Rings (Std)
	I850280051	Gasket Set
	I898730052	Gaskets
I92103	I74651	Spares Kit
I92104	I74651	Spares Kit
I92154	I771060051	Gasket Set
	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	I889590052	Gaskets
	II38717F004	Reed Valve Kit
I92160	II14588008	Spares Kit

Part Number	Kit Number	Description
I92161	II14588008	Spares Kit
I92172	I87546	Spares Kit
	I903090051	Gasket Set
	I92180008	Spares Kit
I92181	I92181008	Spares Kit
I92182	I92182008	Spares Kit
I92183	I92180008	Spares Kit
I92185	I92182008	Spares Kit
I92187	I92182008	Spares Kit
I92190	I93149008	Spares Kit
I92191	I92182008	Spares Kit
I92238	I92238008	Spares Kit
I92279	I85667	Spares Kit
I92291	I820450062	Spares Kit
	I922910061	Spares Kit
I92295	I93567008	Spares Kit
	I94842004	Linkage
I92427	I87919	Service Kit
	II40100F	Filter Cartridge
I92478	I706150051	Gasket Set
	I81171	Seal Kit
	I88834	Unloader Kit
I92485	I88834	Unloader Kit
I92489	I92489008	Spares Kit
I92494	I92494008	Spares Kit
I92503	I706150051	Gasket Set
	I81171	Seal Kit
I92567	I74651	Spares Kit
I92568	I74651	Spares Kit
I92612	I74651	Spares Kit
I92613	I74651	Spares Kit
I92695	B47837	Spiral Spring
I92700	I92723008	Spares Kit
I92723	I92723008	Spares Kit
I92737	I92723008	Spares Kit
I92840	I801770061	Piston Rings
	I908220052	Gaskets
I92952	I92952008	Spares Kit
I92972	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
I92995	I76992	Spares Kit
I93014	I86077	Spares Kit
I93070	I87122004	Heater Plug
	I87640008	Spares Kit
	II40100F	Filter Cartridge
I93083	I880940051	Gasket Set
	I90586	Seal Kit
I93139	I851330051	Gasket Set
	I87287004	Heater Plug
	I87917	Service Kit
	I93357004	Damper Plate
	II40100F	Filter Cartridge
I93234	I93234008	Spares Kit
I93253	I84013	Seal Kit
I93257	I88835	Unloader Kit
I93262	I93262008	Spares Kit
I93289	I50428	Cylinder Body
I93297	I92903	Service Kit
I93304	II14119008	Seal Kit
I93362	I93362008	Spares Kit
I93422	I69784	Service Kit
I93497	I74651	Spares Kit
I93498	I74651	Spares Kit
I93507	I74651	Spares Kit

Spares kits

Part Number	Kit Number	Description
I93508	I74651	Spares Kit
I93510	I93311	Spares Kit
I93517	I80448	Seal Kit
I93552	SEB22068	Spares Kit
I93553	SEB22068	Spares Kit
I93565	II14588008	Spares Kit
I93581	I84613	Spares Kit
	I935810051	Gasket Set
I93582	I83345008	Spares Kit
	I935810051	Gasket Set
I93583	I93583008	Spares Kit
I93584	I92712	Spares Kit
I93620	I801770061	Piston Rings
	I850280052	Gaskets
	I936200051	Gasket Set
I93620000	I801770061	Piston Rings
	I850280052	Gaskets
	I936200051	Gasket Set
I93632	I87122004	Heater Plug
	I93632008	Spares Kit
	II40100F	Filter Cartridge
I93648	I93648008	Spares Kit
I93667	I87122004	Heater Plug
	I93632008	Spares Kit
	II40100F	Filter Cartridge
I93736	I87919	Service Kit
	I93357004	Damper Plate
	I93843004	Heater Plug
	II40100F	Filter Cartridge
I93770	I771060051	Gasket Set
	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	I889590052	Gaskets
	II38717F004	Reed Valve Kit
I93912	I77188	Spares Kit
I94027	I87122004	Heater Plug
	I87918	Service Kit
	II40100F	Filter Cartridge
I94037	I87546	Spares Kit
	I903090051	Gasket Set
I94039	I87546	Spares Kit
	I903090051	Gasket Set
I94062	I801770061	Piston Rings
	I908220052	Gaskets
I94064	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I853880051	Gasket Set
	I908220052	Gaskets
	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II38715F004	Reed Valve Kit
I94066	I801770061	Piston Rings
	I908220052	Gaskets
	I936200051	Gasket Set
I94102	I87918	Service Kit
	I93843004	Heater Plug
	II40100F	Filter Cartridge
I94103	I851330051	Gasket Set
	I87917	Service Kit
	I93843004	Heater Plug
	II40100F	Filter Cartridge
I94171	B47837	Spiral Spring
I94301	I77188	Spares Kit
I94314000	I81169	Piston
	I811690062	Piston Rings (Std)

Part Number	Kit Number	Description
I94622	I94622006	Spares Kit
I94649	I85667	Spares Kit
	I88269004	Cover
I94650	I85667	Spares Kit
	I88269004	Cover
I94658	I94658008	Spares Kit
I94754	II40100F	Filter Cartridge
I94761	I88834	Unloader Kit
I94881	I88833	Spares Kit
I94912	B47837	Spiral Spring
	I892390062	Spares Kit
	I90587	Diaphragm, Dust Cover & Seals
	I905870061	Diaphragm & Dust Cover
I94956	I87918	Service Kit
	II40100F	Filter Cartridge
I97001	B47837	Spiral Spring
I97041	I892390062	Spares Kit
	I90587	Diaphragm, Dust Cover & Seals
	I905870061	Diaphragm & Dust Cover
I97048	B47837	Spiral Spring
	I892390062	Spares Kit
	I90587	Diaphragm, Dust Cover & Seals
	I905870061	Diaphragm & Dust Cover
I97363	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	SEB22161	Spares Kit
I97388	I87565008	Spares Kit
I97492	I801770061	Piston Rings
	I81015004	Valve Plate Assembly
	I810150061	Reed Valve Kit
	I869090051	Cylinder Head Gasket
	I869090052	Body & Base Gaskets
	SEB00626004	Con Rod Assembly
	SEB22135	Spares Kit
I97493	I801770061	Piston Rings
	I81015004	Valve Plate Assembly
	I810150061	Reed Valve Kit
	I869090051	Cylinder Head Gasket
	I869090052	Body & Base Gaskets
	SEB00626004	Con Rod Assembly
	SEB22135	Spares Kit
I97915	I72371	Service Kit
I97953	I69749	Spares Kit
I98036	I87122004	Heater Plug
	I87918	Service Kit
	II40100F	Filter Cartridge
I98113	B47837	Spiral Spring
I98136	I851390051	Gasket Set
	I87122004	Heater Plug
	I90121	Seal Kit
	II40100F	Filter Cartridge
I98153	I880940051	Gasket Set
	I90586	Seal Kit
I98188	I851390051	Gasket Set
	I90121	Seal Kit
	II40100F	Filter Cartridge
I98189	I851390051	Gasket Set
	I87122004	Heater Plug
	I90121	Seal Kit
	II40100F	Filter Cartridge
I98348	I98348008	Spares Kit
I98349	I98348008	Spares Kit
I98423	B47837	Spiral Spring
I98498	I771060051	Gasket Set
	I771060052	Gaskets

Spares kits

Part Number	Kit Number	Description
I98498	I77246	Piston And Cylinder
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
I98499	I81169	Piston
	I811690062	Piston Rings (Std)
	I889590052	Gaskets
I98733	I93565008	Service Kit
I98735	I87919	Service Kit
	I93843004	Heater Plug
	II40100F	Filter Cartridge
I98736	I87919	Service Kit
	II40100F	Filter Cartridge
I98737	I87919	Service Kit
	I93843004	Heater Plug
	II40100F	Filter Cartridge
I98746	I72371	Service Kit
I98802	I988040061	Spares Kit
I98804	I988040061	Spares Kit
I98819	234100K	Diaphragm
I98822	234189K	Diaphragm
	I98822008	Spares Kit
I98823	234099K	Diaphragm
	II358760061	Spring Portion
I98824	234099K	Diaphragm
	I98824008	Spares Kit
	II358760061	Spring Portion
I98919	I87918	Service Kit
	I93843004	Heater Plug
	II40100F	Filter Cartridge
I98981	B47837	Spiral Spring
I99614	I87918	Service Kit
	II40100F	Filter Cartridge
I99615	I851330051	Gasket Set
	I87917	Service Kit
	II40100F	Filter Cartridge
I99630	I98348008	Spares Kit
I99631	I98348008	Spares Kit
I99719	I99719008	Seal Kit
I99723	I851330051	Gasket Set
	I87122004	Heater Plug
	I87917	Service Kit
	II40100F	Filter Cartridge
I99810	II14296008	Spares Kit
I99811	II14296008	Spares Kit
I99940	I771060051	Gasket Set
	I77246	Piston And Cylinder
	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	I850280052	Gaskets
	II38717F004	Reed Valve Kit
II14006	234099K	Diaphragm
II14119	II14119008	Seal Kit
II14130	I88834	Unloader Kit
II14193	I880940051	Gasket Set
	I90586	Seal Kit
II14194	I880940051	Gasket Set
	I90586	Seal Kit
II14195	II14195008	Service Kit
II14295	I87122004	Heater Plug
	I87640008	Spares Kit
	II40100F	Filter Cartridge
II14296	II14296008	Spares Kit
II14304	B47837	Spiral Spring
II14305	B47837	Spiral Spring
II14309	B47837	Spiral Spring
	I866000061	Spares Kit

Part Number	Kit Number	Description
II14310	B47837	Spiral Spring
	I866000061	Spares Kit
II14560000	234099K	Diaphragm
II14570	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I81169	Piston
	I811690062	Piston Rings (Std)
	II145700052	Gaskets
	II38714F004	Reed Valve Kit
II14588	II14588008	Spares Kit
II14589	II14588008	Spares Kit
II14591	II14892008	Spares Kit
II14635	B47837	Spiral Spring
II14636	B47837	Spiral Spring
II14781	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	II147810051	Gasket Set
	II14871004	Reed Valve Kit
II14785	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
II14786	I81169	Piston
	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II147860062	Bearing Bushings Kit
	II159920063	ESS Kit
II14870	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I81169	Piston
	I811690062	Piston Rings (Std)
	II145700052	Gaskets
	II38714F004	Reed Valve Kit
II14892	II14892008	Spares Kit
II14893	II14892008	Spares Kit
II14894	II14892008	Spares Kit
II14895	II14892008	Spares Kit
II15235	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II15332	I93362008	Spares Kit
II15334	I93362008	Spares Kit
II15372	I92903	Service Kit
II15498	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II15587	II15588008	Spares Kit
II15588	II15588008	Spares Kit
II15588000	II15588008	Spares Kit
II15591	II14296008	Spares Kit
II15698	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920065	End Cover Assembly
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly

Spares kits

Part Number	Kit Number	Description
II15698	SEB011380061	ESS Kit
II15698000	I81169	Piston
	I811690062	Piston Rings (Std)
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB011380061	ESS Kit
II15729	I98348008	Spares Kit
II15730	I98348008	Spares Kit
II15741	I84342	Spares Kit
II15992	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920065	End Cover Assembly
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01052004	Cylinder Head
	SEB011380061	ESS Kit
II15992000	I81169	Piston
	I811690062	Piston Rings (Std)
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01052004	Cylinder Head
	SEB011380061	ESS Kit
II15993	I801770061	Piston Rings
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159930051	Spares Kit
	II159930063	Spares Kit
	II326850061	Spares Kit
	SEB00957004	Con Rod Assembly
	SEB010800061	Cylinder Head Assembly
	SEB01081004	Valve Plate Assembly
II15993000	I801770061	Piston Rings
	SEB00957004	Con Rod Assembly
	SEB010800061	Cylinder Head Assembly
	SEB01081004	Valve Plate Assembly
II15998	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I84870004	Reed Valve Kit
	I850280051	Gasket Set
II16060	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II16070	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II16096	I84518	Seal Kit
II16098	II14296008	Spares Kit
II16149	I851390051	Gasket Set
	I90121	Seal Kit
	II16811004	Heater Plug
	II40100F	Filter Cartridge
II16159	II16159008	Spares Kit
II16189	I98348008	Spares Kit

Part Number	Kit Number	Description
II16190	I98348008	Spares Kit
II16243	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB01033004	Valve Plate Assembly
	SEB011380061	ESS Kit
II16361	I93614	Spares Kit
II16468	I82546	Spares Kit
II16472	II16472008	Spares Kit
II16486	234226K	Diaphragm
	II16486008	Spares Kit
	II171280061	Spring Portion
II16537	I90694	Service Kit
II16538	I90694	Service Kit
II16539	I87259	Spares Kit
II16546	II311630051	Gasket Set
	II35529	Sensor
	II36253008	Spares Kit
II16567	II358760061	Spring Portion
II16575	II168490061	Spring Portion
II16576	II168490061	Spring Portion
II16692	I93234008	Spares Kit
II16761	II16761004	Sensor
II16763	II16763004	Sensor
II16764004	II16774004	Clamping Sleeve Kit
II16783	I84451008	Complete Overhaul Kit
II16854	SEB22379	Spares Kit
II16855	SEB22380	Spares Kit
II17092	234100K	Diaphragm
	II17092008	Diaphragm & Dust Cover
II17093	II17092008	Diaphragm & Dust Cover
II17094	II17092008	Diaphragm & Dust Cover
II17189	II17189008	Spares Kit
II17252	I81169	Piston
	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II186040061	Inlet Reed
II17257	I771060051	Gasket Set
	I771060052	Gaskets
	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
II17281	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II17282	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II17353	I77188	Spares Kit
II17366	II325810051	Gasket Set
	II325810061	Spares Kit
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II40100F	Filter Cartridge
II17369	II325810051	Gasket Set
	II325810061	Spares Kit
	II362510061	Exhaust Cover

Spares kits



Part Number	Kit Number	Description
II17369	II36251008	Spares Kit
	II40100F	Filter Cartridge
II17393	I771060051	Gasket Set
	I771060052	Gaskets
	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
II17468	II171280061	Spring Portion
II17469	234226K	Diaphragm
	II171280061	Spring Portion
II17470	II171280061	Spring Portion
II17471	II177570061	Spring Portion
II17472	234189K	Diaphragm
	II177570061	Spring Portion
II17473	II177570061	Spring Portion
II17474	II177570061	Spring Portion
II17479	II17479008	Spares Kit
II17480	II17479008	Spares Kit
II17649	I84451008	Complete Overhaul Kit
II17755	I98824008	Spares Kit
II17767	II177670051	Gasket Set
	II17767008	Spares Kit
II17771	II17771008	Spares Kit
II17772	I94658008	Spares Kit
II17787	II17366	Air Dryer
	II311630051	Gasket Set
	II325810051	Gasket Set
	II325810061	Spares Kit
	II325820051	O-Ring
	II35529	Sensor
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II36253008	Spares Kit
	II40100F	Filter Cartridge
II17788	II17369	Air Dryer
	II311630051	Gasket Set
	II325810051	Gasket Set
	II325810061	Spares Kit
	II325820051	O-Ring
	II35529	Sensor
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II36253008	Spares Kit
	II37680	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II17791	II17189008	Spares Kit
II17924	II182050061	Spring Portion
II17925	II182050061	Spring Portion
II17926	II182050061	Spring Portion
II17935	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II17936	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II17937	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II17938	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit

Part Number	Kit Number	Description
II17938	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II18067	I81990	Diaphragm
II18069	I84451008	Complete Overhaul Kit
	II14892008	Spares Kit
II18167	II18490008	Spares Kit
II18172	II14296008	Spares Kit
II18206	II182050061	Spring Portion
II18224	II18224008	Spares Kit
II18355	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I811690062	Piston Rings (Std)
	II145700052	Gaskets
	II38714F004	Reed Valve Kit
II18356	I803980061	Reed Valve Kit
	I810890051	Gasket Set
	I811690062	Piston Rings (Std)
	II145700052	Gaskets
	II38714F004	Reed Valve Kit
II18490	II18490008	Spares Kit
II18503	II18503008	Spares Kit
II18528	II185300061	Spring Portion
II18547	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II18548	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II18602	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I853880051	Gasket Set
	I908220052	Gaskets
	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II38715F004	Reed Valve Kit
II18606	I81169	Piston
	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II159920063	ESS Kit
	II186040061	Inlet Reed
II18692	II18692008	Spares Kit
II18693	II18692008	Spares Kit
II18754	II18754008	Spares Kit
II18755	I851390051	Gasket Set
	I87122004	Heater Plug
	I90121	Seal Kit
	II18753004	Heater Connector
	II40100F	Filter Cartridge
II18785	II14892008	Spares Kit
II18786	II14892008	Spares Kit
II18842	II182050061	Spring Portion
II18886	II18850008	Spares Kit
II18887	II185270061	Spring Portion
II18888	II185270061	Spring Portion
II18923	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit

Spares kits

Part Number	Kit Number	Description
II18924	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II18925	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
II18926	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
II18927	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II18928	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II18960	234189K	Diaphragm
	II185300061	Spring Portion
II18961	234099K	Diaphragm
II18971	SEB22406	Spares Kit
II18972	SEB22406	Spares Kit
II19020	SEB22373	Spares Kit
II19065	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	II147810051	Gasket Set
	II14871004	Reed Valve Kit
II19086	I98348008	Spares Kit
II19087	I98348008	Spares Kit
II19201	I87640008	Spares Kit
	II40100F	Filter Cartridge
II19204	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II19205	I93357004	Damper Plate
	II19762004	Heater Plug (Type B2)
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II19206	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II36249008	Spares Kit
II19207	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II19762004	Heater Plug (Type B2)
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II19208	II36249008	Spares Kit
	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)

Part Number	Kit Number	Description
II19208	II36248008	Spares Kit
	II36250008	Spares Kit
	II40100F	Filter Cartridge
II19209	I93357004	Damper Plate
	II19762004	Heater Plug (Type B2)
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II36250008	Spares Kit
	II40100F	Filter Cartridge
II19211	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	II19212	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II19213	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36250008	Spares Kit
	II40100F	Filter Cartridge
	II19214	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	II19215	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
	II19216	Gasket Set (with heater seals)
	II36250008	Spares Kit
	II40100F	Filter Cartridge
	II19261	Diaphragm & Dust Cover
	II19262	Diaphragm & Dust Cover
	II19263	Diaphragm & Dust Cover
	II19264	Diaphragm & Dust Cover
	II19265	Diaphragm & Dust Cover
	II19266	Diaphragm & Dust Cover
	II19279	Spring Portion
	II19325	Heater Plug
	II19328008	Spares Kit
	II40100F	Filter Cartridge
II19326	I87122004	Heater Plug
	II19325008	Spares Kit
	II40100F	Filter Cartridge
II19327	I87122004	Heater Plug
	II19327008	Spares Kit
	II40100F	Filter Cartridge
II19328	II19328008	Spares Kit
	II40100F	Filter Cartridge
	II19329	Spares Kit
	II40100F	Filter Cartridge
	II19330	Filter Cartridge
	II19332	Heater Plug
	II19332008	Spares Kit
	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
	II19333	Heater Plug
	II19332008	Spares Kit
	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
II19334	I87122004	Heater Plug
	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
	II19335	Heater Plug

Spares kits

Part Number	Kit Number	Description
II19335	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
II19337	I87122004	Heater Plug
	II19332008	Spares Kit
	II362450051	Gasket Set
	II36245008	Spares Kit
II19338	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
II19342	SEB22380	Spares Kit
II19362	I87122004	Heater Plug
	II19362008	Spares Kit
	II362450051	Gasket Set
	II362450061	Unloader Kit
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II19364	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
II19365	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
II19366	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
II19367	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
II19369	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
II19370	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
II19371	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II19375	I93843004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II19416	I93565008	Service Kit
II19418	I93565008	Service Kit
II19423	I93565008	Service Kit
II19424	I93565008	Service Kit
II19428	I93362008	Spares Kit
II19451	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II19452	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II19484	I93357004	Damper Plate
	I93843004	Heater Plug

Part Number	Kit Number	Description
II19484	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II19485	I93357004	Damper Plate
	II194830051	Gasket Set (less heater seals)
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II36250008	Spares Kit
	II40100F	Filter Cartridge
II19486	I93357004	Damper Plate
	I93843004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II36250008	Spares Kit
	II40100F	Filter Cartridge
II19494	I811690062	Piston Rings (Std)
	II14871004	Reed Valve Kit
II19495	I811690062	Piston Rings (Std)
	II14871004	Reed Valve Kit
II19497	II147790061	Bearing Bushings Kit
	II17974004	Reed Valve Kit
	II179740061	Reed Valve Kit
	II308970051	Gasket Set
	II308970061	Piston And Cylinder
II19612	II19612008	Spares Kit
II19707	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II19708	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II19723	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II19724	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II19725	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit

Spares kits

Part Number	Kit Number	Description
II19726	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II19728	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II197140062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
II19748	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II182050061	Spring Portion
	II182050061	Spring Portion
	SEB22373	Spares Kit
II19759	I87546	Spares Kit
	I903090051	Gasket Set
	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
	II30079008	Spares Kit
II30157	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II30158	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II30175	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II30178	K001301	Bellows Cap Kit
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
II30179	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II30180	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
II30181	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
	I93843004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II30182	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II40100F	Filter Cartridge
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II30184	I87122004	Heater Plug
	II40100F	Filter Cartridge
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
II30185	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit

Part Number	Kit Number	Description
II30185	II36248008	Spares Kit
	II40100F	Filter Cartridge
	SEB22373	Spares Kit
	SEB22373	Spares Kit
	I81990	Diaphragm
	II180220062	Brake Pad Kit (Jurid 539FF)
II30210	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II30211	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II30267	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
II30400	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
II30401	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
II30402	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
II30403	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II30404	II197330062	Guide And Seal Kit (Rubber Boot)
	II310240061	Wear Indicator Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II30443	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
	I87287004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
II30444	II40100F	Filter Cartridge
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II30445	II40100F	Filter Cartridge
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36250008	Spares Kit
II30446	II40100F	Filter Cartridge
	I87122004	Heater Plug
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36250008	Spares Kit
	II40100F	Filter Cartridge
II30447	I87122004	Heater Plug
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36250008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
II30448	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II30449	II40100F	Filter Cartridge
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
II30450	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87287004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II30451	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
II30455	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
II30458	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362450051	Gasket Set
	II36246008	Spares Kit

Spares kits

Part Number	Kit Number	Description
II30458	II36245008	Spares Kit
	II40100F	Filter Cartridge
	SEB22373	Spares Kit
II30475	I94622006	Spares Kit
II30525	II185300061	Spring Portion
II30619	II185300061	Spring Portion
II30625	I87122004	Heater Plug
II30650	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II30651	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
II30652	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
II30657	II36248008	Spares Kit
	II40100F	Filter Cartridge
	II362480051	Gasket Set (with heater seals)
II30808	I851390051	Gasket Set
	I90121	Seal Kit
	I93843004	Heater Plug
II30809	II40100F	Filter Cartridge
	II362450051	Gasket Set
	II36245008	Spares Kit
II30810	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
II30812	II36248008	Spares Kit
	II40100F	Filter Cartridge
	I87122004	Heater Plug
II30892	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II30895	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
II30897	II159920065	End Cover Assembly
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01052004	Cylinder Head
II30898	II147790061	Bearing Bushings Kit
	II17974004	Reed Valve Kit
	II179740061	Reed Valve Kit
	II308970051	Gasket Set
	II308970061	Piston And Cylinder
II30899	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II173970051	Gasket Set
	II173970052	Gaskets
II30899	II38715F004	Reed Valve Kit
	I811690062	Piston Rings (Std)
	SEB01033004	Valve Plate Assembly
	SEB01052004	Cylinder Head

Part Number	Kit Number	Description
II30900	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
II30901	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB011380061	ESS Kit
II31022	I869090051	Cylinder Head Gasket
	I869090052	Body & Base Gaskets
	SEB22135	Spares Kit
	II179320062	Guide And Seal Kit (Rubber Boot)
II31023	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II31026	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II179320062	Guide And Seal Kit (Rubber Boot)
	II180220062	Brake Pad Kit (Jurid 539FF)
II31027	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
II31030	K001301	Bellows Cap Kit
	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
II31031	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II179320062	Guide And Seal Kit (Rubber Boot)
II31090	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II31102	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II31104	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
II31112	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II179320062	Guide And Seal Kit (Rubber Boot)
II31113	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II31118	II179320062	Guide And Seal Kit (Rubber Boot)
	II339830064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Spares kits

Part Number	Kit Number	Description
II31119	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II31163	II311630051	Gasket Set
II31402	II14588008	Spares Kit
II31477	I93843004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II31478	I93843004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II31480	II18754008	Spares Kit
II31481	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II31550	234226K	Diaphragm
II31556	SEB22371	Spares Kit
II31654	II171280061	Spring Portion
II31730	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB01033004	Valve Plate Assembly
	SEB011380061	ESS Kit
II31733	II31733008	Spares Kit
II31739	II325810051	Gasket Set
	II325810061	Spares Kit
	II40100F	Filter Cartridge
II31789	II19261008	Diaphragm & Dust Cover
II31920	I81169	Piston
II31949	I789790061	Piston And Cylinder
	I81169	Piston
	I811690062	Piston Rings (Std)
	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II173970051	Gasket Set
	II173970052	Gaskets
	II38715F004	Reed Valve Kit
II31955	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920066	Bearing
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01444004	Spares Kit
II31984	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II31985	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)

Part Number	Kit Number	Description
II31985	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II31995	234226K	Diaphragm
II31997	234189K	Diaphragm
	II185300061	Spring Portion
II32005	II30079008	Spares Kit
II32006	II19261008	Diaphragm & Dust Cover
II32091	I689110051	Gasket Set
	I72375	Spares Kit
II32122	II358760061	Spring Portion
II32124	234099K	Diaphragm
II32127	234099K	Diaphragm
	II192760061	Spring Portion
II32128	234101K	Diaphragm
	II182050061	Spring Portion
II32135	II358760061	Spring Portion
II32223	I81169	Piston
	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II186040061	Inlet Reed
II32581	II325810051	Gasket Set
	II325810061	Spares Kit
	II40100F	Filter Cartridge
II32582	II31163	Four Circuit Prot. Valve
	II311630051	Gasket Set
	II325810051	Gasket Set
	II325810061	Spares Kit
	II325820051	O-Ring
	II40100F	Filter Cartridge
II32584	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II32589	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II32686	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
II32688	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01444004	Spares Kit
II32690	I801770061	Piston Rings
	I804080061	Reed Valve Kit
	II38717F004	Reed Valve Kit
II32718	II302130061	Spring Portion
II32736	II30079008	Spares Kit
II32737	II30079008	Spares Kit
II32738	II19261008	Diaphragm & Dust Cover
II32739	II19261008	Diaphragm & Dust Cover

Spares kits

Part Number	Kit Number	Description
II32764	II18503008	Spares Kit
II32765	II32765008	Spares Kit
II32766	I81990	Diaphragm
	II14588008	Spares Kit
II32798	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II32802	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32803	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32804	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32805	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32806	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32807	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32812	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32813	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32842	I869090051	Cylinder Head Gasket
	SEB22135	Spares Kit
II32935	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit

Part Number	Kit Number	Description
II32935	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32936	II180220062	Brake Pad Kit (Jurid 539FF)
	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32941	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II32942	II197330062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II33044	I93362008	Spares Kit
II33163	I81169	Piston
	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II186040061	Inlet Reed
II33164	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920051	Cylinder Head Gaskets
	II159920061	Cylinder Head Assembly
	II159920063	ESS Kit
	II159920064	Sump Plate
	II159920065	End Cover Assembly
	II159920066	Bearing
	II326840061	Inlet Reed
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01052004	Cylinder Head
	SEB011380061	ESS Kit
II33164000	I81169	Piston
	I811690062	Piston Rings (Std)
	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB01052004	Cylinder Head
	SEB011380061	ESS Kit
II33420	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II38703F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II33421	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II38703F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II33424	II30654004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II33430	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide

Spares kits

Part Number	Kit Number	Description	
II33430	II339830064	Rubber Bush Guidance Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001104	Brake Pad Kit (Ferrodo 4550)	
	K001301	Bellows Cap Kit	
II33431	II180220062	Brake Pad Kit (Jurid 539FF)	
	II339660061	Wear Indicator Kit with Guide	
	II368470064	Rubber Bush Guidance Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001104	Brake Pad Kit (Ferrodo 4550)	
	K001301	Bellows Cap Kit	
	II180220062	Brake Pad Kit (Jurid 539FF)	
	II339660061	Wear Indicator Kit with Guide	
	II368470064	Rubber Bush Guidance Kit	
II33432	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	
	II180220062	Brake Pad Kit (Jurid 539FF)	
	II339660061	Wear Indicator Kit with Guide	
II33433	II368470064	Rubber Bush Guidance Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	
	II180220062	Brake Pad Kit (Jurid 539FF)	
II33438	II339660061	Wear Indicator Kit with Guide	
	II368470064	Rubber Bush Guidance Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001104	Brake Pad Kit (Ferrodo 4550)	
II33453	K001301	Bellows Cap Kit	
	II185300061	Spring Portion	
	II33454	Spring Portion	
	II33457	16LS	Diaphragm
	II33485	24LS	Diaphragm
II33490	II182050061	Spring Portion	
II33509	I81169	Piston	
	I811690062	Piston Rings (Std)	
	I943140051	Gasket Set	
	I81169	Piston	
	I811690062	Piston Rings (Std)	
II33510	I943140051	Gasket Set	
	II19762004	Heater Plug (Type B2)	
	II362450051	Gasket Set	
	II36246008	Spares Kit	
	II40100F	Filter Cartridge	
II33631	II179320062	Guide And Seal Kit (Rubber Boot)	
	II339830064	Rubber Bush Guidance Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001104	Brake Pad Kit (Ferrodo 4550)	
II33758	K001301	Bellows Cap Kit	
	II180220062	Brake Pad Kit (Jurid 539FF)	
	II328090062	Guide And Seal Kit (Rubber Boot)	
	II368470064	Rubber Bush Guidance Kit	
	II39769F0062	Guide And Seal Kit (Steel Cap)	
II33759	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	
	II180220062	Brake Pad Kit (Jurid 539FF)	
	II328090062	Guide And Seal Kit (Rubber Boot)	
II33760	II368470064	Rubber Bush Guidance Kit	
	II39769F0062	Guide And Seal Kit (Steel Cap)	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	

Part Number	Kit Number	Description
II33760	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II33761	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II33782	K001301	Bellows Cap Kit
	20LS	Diaphragm
	24LS	Diaphragm
II33783		
II33921	I92903	Service Kit
II33922	I92903	Service Kit
II33926	II19328008	Spares Kit
	II30654004	Heater Plug
	II40100F	Filter Cartridge
II33929	II19762004	Heater Plug (Type B2)
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II33932	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II33977	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II33981	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
II33981M2	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II17934004	Adjuster Cap Kit
	II19712004	Pad Retainer Kit
II33981V1	II38863F0062	Brake Pad Kit
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II33981V2	II339660061	Wear Indicator Kit with Guide
	II368470064	Rubber Bush Guidance Kit
	II38863F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II33982	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II339660061	Wear Indicator Kit with Guide
	II368470064	Rubber Bush Guidance Kit
II33982	II38863F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II33982	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
II33982	K000944	Tappet & Boot Kit

Spares kits

Part Number	Kit Number	Description
II33982	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II33982V1	II328090062	Guide And Seal Kit (Rubber Boot)
	II339660061	Wear Indicator Kit with Guide
	II368470064	Rubber Bush Guidance Kit
	II38863F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II33982V2	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II339660061	Wear Indicator Kit with Guide
II34069	II368470064	Rubber Bush Guidance Kit
	II38863F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II34161	K001301	Bellows Cap Kit
	I81169	Piston
	I811690062	Piston Rings (Std)
	I853880051	Gasket Set
	I908220052	Gaskets
II34161M1	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II38715F004	Reed Valve Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II34162	II376580062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34323	II304130061	Gasket Set
	II304130062	Guide And Seal Kit (Rubber Boot)
	II30679004	Brake Pad Retainer
	K000944	Tappet & Boot Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II34324	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II34326	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II34326	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
II34326	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II34326	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit

Part Number	Kit Number	Description
II34326	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II34405	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	I81169	Piston
	I811690062	Piston Rings (Std)
	II344040051	Cylinder Head Gasket
II34452	SEB01034004	Valve Plate Assembly
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II34453	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II34454	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34455	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II34456	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II34457	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II34458	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II34459	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34459	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)

Spares kits

Part Number	Kit Number	Description
II34459	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II34464	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34465	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34475	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34476	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34477	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34478	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34487	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34488	II180220062	Brake Pad Kit (Jurid 539FF)

Part Number	Kit Number	Description
II34488	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34592	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34593	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34594	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34595	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34598	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34599	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34603	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39462F0062	Brake Pad Kit (Ferrodo 4550)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34604	II180220062	Brake Pad Kit (Jurid 539FF)

Spares kits



Part Number	Kit Number	Description
II34604	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39462F0062	Brake Pad Kit (Ferrodo 4550)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34814	I94658008	Spares Kit
II34820	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34821	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II34841	I801770061	Piston Rings
	II156970051	Head Gasket Kit
	SEB00626004	Con Rod Assembly
	SEB01000004	Valve Plate Assembly
II34894	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II38703F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34895	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II38703F0062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34898	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34899	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II34976	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II34977	II362450051	Gasket Set
	II36247008	Spares Kit

Part Number	Kit Number	Description
II34977	II40100F	Filter Cartridge
II34982	II325810051	Gasket Set
	II40100F	Filter Cartridge
II35055	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II35056	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II35058	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II35396	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II35397	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II35401	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II35402	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II35403	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II35404	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)

Spares kits

Part Number	Kit Number	Description
II35404	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodó 4550)
	K001301	Bellows Cap Kit
II35522	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge
II35523	I87122004	Heater Plug
	I93357004	Damper Plate
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
II35526	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362450051	Gasket Set
	II36247008	Spares Kit
II35530	II40100F	Filter Cartridge
	II17366	Air Dryer
	II325810051	Gasket Set
	II325810061	Spares Kit
II35531	II325820051	O-Ring
	II35529004	Heater Plug (APU's)
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II37680	Four Circuit Prot. Valve
	II37680008	Spares Kit
	II40100F	Filter Cartridge
	II17369	Air Dryer
	II325810051	Gasket Set
	II325810061	Spares Kit
	II325820051	O-Ring
	II35529004	Heater Plug (APU's)
II35540	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II37680	Four Circuit Prot. Valve
	II37680008	Spares Kit
	II40100F	Filter Cartridge
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II35541	K001104	Brake Pad Kit (Ferrodó 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
II35564	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II35570	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodó 4550)
	K001301	Bellows Cap Kit
	II156970051	Head Gasket Kit
II35570	SEB00626004	Con Rod Assembly
	SEB01000004	Valve Plate Assembly
	II17974004	Reed Valve Kit
	II179740061	Reed Valve Kit
II35696	II35696008	Spares Kit
	II37939004	Spares Kit
II35800	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit

Part Number	Kit Number	Description
II35800	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II35801	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II35813	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
II35814	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II35815	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II35816	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
II35838	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II35839	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II35839	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)

Spares kits



Part Number	Kit Number	Description
II35839	K001301	Bellows Cap Kit
II35957	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II35958	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II36005	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II311630051	Gasket Set
II36006	II35529004	Heater Plug (APU's)
	II36253008	Spares Kit
	II311630051	Gasket Set
	II325810051	Gasket Set
II36007	II325810061	Spares Kit
	II325820051	O-Ring
	II35529004	Heater Plug (APU's)
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II36253008	Spares Kit
	II38797F	Four Circuit Prot. Valve
II36008	II40100F	Filter Cartridge
	II325810051	Gasket Set
	II325810061	Spares Kit
	II362510061	Exhaust Cover
II36239	II36251008	Spares Kit
	II40100F	Filter Cartridge
	II311630051	Gasket Set
	II35529004	Heater Plug (APU's)
II36257	II36253008	Spares Kit
	II325810051	Gasket Set
	II325810061	Spares Kit
	II362510061	Exhaust Cover
II36258	II36251008	Spares Kit
	II40100F	Filter Cartridge
	I93357004	Damper Plate
	II19762004	Heater Plug (Type B2)
II36373	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
	I93357004	Damper Plate
II36379	II19762004	Heater Plug (Type B2)
	II362480051	Gasket Set (with heater seals)
	II36250008	Spares Kit
	II40100F	Filter Cartridge
II36424	II84613	Spares Kit
	I935810051	Gasket Set
	II35696008	Spares Kit
	II37939004	Spares Kit
II36426	II147790061	Bearing Bushings Kit
	II17974004	Reed Valve Kit
	II179740061	Reed Valve Kit
	II308970051	Gasket Set
II36430	II364250061	Piston And Cylinder
	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II173970051	Gasket Set
II36430	II173970052	Gaskets
	II38715F004	Reed Valve Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339830064	Rubber Bush Guidance Kit

Part Number	Kit Number	Description
II36430	II358510062	Guide And Seal Kit (Rubber Boot)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36431	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
II36490	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II36491	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II36529	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II36653	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II175670061	Spring Portion
II36683	II40100F	Filter Cartridge
	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	II344730063	Bellows Cap Kit
II36684	II368470064	Rubber Bush Guidance Kit
	II369100062	Guide And Seal Kit (Rubber Boot)
	K000358	Brake Carrier
	K000944	Tappet & Boot Kit
II36687	K001537	Brake Pad Kit
	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	II344730063	Bellows Cap Kit
II36688	II368470064	Rubber Bush Guidance Kit
	II369100062	Guide And Seal Kit (Rubber Boot)
	K000358	Brake Carrier
	K000944	Tappet & Boot Kit
II36689	K001537	Brake Pad Kit
	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	II344730063	Bellows Cap Kit
II36689	II368470064	Rubber Bush Guidance Kit
	II369100062	Guide And Seal Kit (Rubber Boot)
	K000358	Brake Carrier
	K000944	Tappet & Boot Kit
II36689	K001537	Brake Pad Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II36689	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II36689	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit

Spares kits

Part Number	Kit Number	Description
II36690	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II36691	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II36692	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II36693	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36694	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36699	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36700	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36701	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36702	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II36703	II350470062	Guide And Seal Kit (Rubber Boot)

Part Number	Kit Number	Description	
II36703	II368470064	Rubber Bush Guidance Kit	
	II380270062	Brake Pad Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	
II36704	II350470062	Guide And Seal Kit (Rubber Boot)	
	II368470064	Rubber Bush Guidance Kit	
	II380270062	Brake Pad Kit	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
II36705	K001301	Bellows Cap Kit	
	II350470062	Guide And Seal Kit (Rubber Boot)	
	II368470064	Rubber Bush Guidance Kit	
	II380270062	Brake Pad Kit	
	K000944	Tappet & Boot Kit	
II36706	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	
	II350470062	Guide And Seal Kit (Rubber Boot)	
	II368470064	Rubber Bush Guidance Kit	
	II380270062	Brake Pad Kit	
II36826	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001301	Bellows Cap Kit	
	II36826008	Complete Overhaul Kit	
	II36827	II36826008	Complete Overhaul Kit
II36828	II36826008	Complete Overhaul Kit	
II36829	II36826008	Complete Overhaul Kit	
II36925	I789790061	Piston And Cylinder	
	I81169	Piston	
	I811690062	Piston Rings (Std)	
	I853880051	Gasket Set	
	I908220052	Gaskets	
	I93078004	Cylinder Head	
	I930790061	Reed Valve Kit	
	II38715F004	Reed Valve Kit	
	II36933	II40100F	Filter Cartridge
	II36935	I851390051	Gasket Set
II36936	I90121	Seal Kit	
	II16811004	Heater Plug	
	II40100F	Filter Cartridge	
	I851390051	Gasket Set	
	I87122004	Heater Plug	
II36936000	I90121	Seal Kit	
	II18753004	Heater Connector	
	II40100F	Filter Cartridge	
	I87122004	Heater Plug	
	II18753004	Heater Connector	
II36940	II40100F	Filter Cartridge	
	II30654004	Heater Plug	
	II362480051	Gasket Set (with heater seals)	
	II36249008	Spares Kit	
	II40100F	Filter Cartridge	
II36985	II19261008	Diaphragm & Dust Cover	
II36986	II19261008	Diaphragm & Dust Cover	
II36999	II180220062	Brake Pad Kit (Jurid 539FF)	
	II328090062	Guide And Seal Kit (Rubber Boot)	
	II368470064	Rubber Bush Guidance Kit	
	II39769F0062	Guide And Seal Kit (Steel Cap)	
	K000944	Tappet & Boot Kit	
	K000945	Adjuster Cap Kit	
	K001104	Brake Pad Kit (Ferrod 4550)	
	K001301	Bellows Cap Kit	
	II37000	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)	
II37000	II368470064	Rubber Bush Guidance Kit	
	II39769F0062	Guide And Seal Kit (Steel Cap)	

Spares kits

Part Number	Kit Number	Description
II37000	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferodo 4550)
	K001301	Bellows Cap Kit
II37001	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37002	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37006	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37007	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37015	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37016	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37017	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37018	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37019	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)

Part Number	Kit Number	Description
II37019	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37020	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37021	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II37022	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37025	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37026	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
II37029	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II37030	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37038	K001301	Bellows Cap Kit
	II325810051	Gasket Set
	II325810061	Spares Kit
	II40100F	Filter Cartridge
	II328090062	Guide And Seal Kit (Rubber Boot)
II37068	II339660061	Wear Indicator Kit with Guide
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37069	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)

Spares kits

Part Number	Kit Number	Description
II37069	II339660061	Wear Indicator Kit with Guide
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37080	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37081	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II37209	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37210	II328090062	Guide And Seal Kit (Rubber Boot)
	II339660061	Wear Indicator Kit with Guide
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37212	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	I81169	Piston
	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
II37214	II147860051	Gasket Set
	II159920063	ESS Kit
	II186040061	Inlet Reed
	I81169	Piston
	I811690062	Piston Rings (Std)
II37215	II159920051	Cylinder Head Gaskets
	II159920063	ESS Kit
	II159920065	End Cover Assembly
	II159920066	Bearing
	II326840061	Inlet Reed
II37214000	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB011380061	ESS Kit
	I81169	Piston
	I811690062	Piston Rings (Std)
II37220	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	SEB011380061	ESS Kit
	I81169	Piston
	I811690062	Piston Rings (Std)
II37223	I853880051	Gasket Set
	I879040052	Gaskets
	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II38715F004	Reed Valve Kit

Part Number	Kit Number	Description
II37223	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37224	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
II37225	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II37226	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37231	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37232	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II37233	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
II37237	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II37246	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37247	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)

Spares kits

Part Number	Kit Number	Description
II37247	K001301	Bellows Cap Kit
II37252	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37253	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37312	II358760061	Spring Portion
II37365	I81169	Piston
	I811690062	Piston Rings (Std)
	I877340061	Piston And Cylinder
II37380	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37381	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37390	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferodo 4550)
	K001301	Bellows Cap Kit
II37391	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferodo 4550)
	K001301	Bellows Cap Kit
II37392	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37393	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37398	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37399	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Part Number	Kit Number	Description
II37399	K001301	Bellows Cap Kit
II37402	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
II37412	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362450051	Gasket Set
II37419	II36245008	Spares Kit
	II40100F	Filter Cartridge
	II328090062	Guide And Seal Kit (Rubber Boot)
II37420	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37421	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
II37422	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II37423	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37424	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37463	II35529004	Heater Plug (APU's)
II37649	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37650	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37662	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	I87122004	Heater Plug
	II362480051	Gasket Set (with heater seals)
	II36248008	Spares Kit
	II40100F	Filter Cartridge

Spares kits

Part Number	Kit Number	Description
II37663	II19762004	Heater Plug (Type B2)
	II362480051	Gasket Set (with heater seals)
	II36249008	Spares Kit
	II40100F	Filter Cartridge
II37664	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II37679	Four Circuit Prot. Valve
II37666	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
II37667	II40100F	Filter Cartridge
	II376720051	Gasket Set
	II376770051	Gasket Set
	II40100F	Filter Cartridge
II37668	II376720051	Gasket Set
	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
II37669	II40100F	Filter Cartridge
	II376720051	Gasket Set
	II376770051	Gasket Set
	II40100F	Filter Cartridge
II37672	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II37679	Four Circuit Prot. Valve
II37672M3	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
II37677	II40100F	Filter Cartridge
	II37677008	Spares Kit
	II376770051	Gasket Set
	II37677008	Spares Kit
II37680	II40100F	Filter Cartridge
	II35529004	Heater Plug (APU's)
	II37680008	Spares Kit
	II350470062	Guide And Seal Kit (Rubber Boot)
II37686	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37687	K001301	Bellows Cap Kit
	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
II37687	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II350470062	Guide And Seal Kit (Rubber Boot)
II37690	II368470064	Rubber Bush Guidance Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
II37691	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
II37691	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
II37715	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II16811004	Heater Plug
	II362480051	Gasket Set (with heater seals)
II37715	II36248008	Spares Kit

Part Number	Kit Number	Description
II37715	II40100F	Filter Cartridge
II37757	I81169	Piston
	I811690062	Piston Rings (Std)
	II377570051	Gasket Set
II37791	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37792	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37792	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II37793	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37794	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37794	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II37797	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
II37797	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37798	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
II37799	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37800	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
II37801	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit



Part Number	Kit Number	Description
II37802	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II380270062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II37803	K001301	Bellows Cap Kit
	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
II37804	II369100062	Guide And Seal Kit (Rubber Boot)
	K000358	Brake Carrier
	K000944	Tappet & Boot Kit
	K001537	Brake Pad Kit
	II17934004	Adjuster Cap Kit
II37805	II30679004	Brake Pad Retainer
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II369100062	Guide And Seal Kit (Rubber Boot)
	K000358	Brake Carrier
II37806	K000944	Tappet & Boot Kit
	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
II37808	II369100062	Guide And Seal Kit (Rubber Boot)
	K000358	Brake Carrier
	K000944	Tappet & Boot Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II37809	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37810	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
	II38168F0061	Wear Indicator Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37811	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II377800062	Brake Pad Kit
	II38168F0061	Wear Indicator Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit

Part Number	Kit Number	Description
II37812	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
II37813	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II37814	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
II37814M4	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000944	Tappet & Boot Kit
II37814M5	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II37815	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37815M4	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
II37815M5	II180220062	Brake Pad Kit (Jurid 539FF)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000944	Tappet & Boot Kit
II37816	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II37817	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II37818	II339660061	Wear Indicator Kit with Guide
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit

Spares kits

Part Number	Kit Number	Description
II37818	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II37818M1	II17934004	Adjuster Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II19712004	Pad Retainer Kit
	II197120065	Pad Retainer Kit (with Guide Plate)
	II304130065	Tappets Kit
	II328090061	Gasket Set
	II339660061	Wear Indicator Kit with Guide
	II339660062	Wear Indicator Kit
	II34157	Adapter Cable
	II344730063	Bellows Cap Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000696	Brass Guidance/Steel Cap
	K000698	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
II37819	II180220062	Brake Pad Kit (Jurid 539FF)
	II339660061	Wear Indicator Kit with Guide
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II37819M1	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II17934004	Adjuster Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II19712004	Pad Retainer Kit
	II197120065	Pad Retainer Kit (with Guide Plate)
	II304130065	Tappets Kit
	II328090061	Gasket Set
	II339660061	Wear Indicator Kit with Guide
	II339660062	Wear Indicator Kit
II37921	II34157	Adapter Cable
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000696	Brass Guidance/Steel Cap
	K000698	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	II362450051	Gasket Set
	II36247008	Spares Kit
II37924	II40100F	Filter Cartridge
	I87122004	Heater Plug
	II362450051	Gasket Set
	II36246008	Spares Kit
II37926	II40100F	Filter Cartridge
	II19461008	Spares Kit
	II362450051	Gasket Set
	II36245008	Spares Kit
II37927	II36246008	Spares Kit
	II40100F	Filter Cartridge
	II362450051	Gasket Set
	II36246008	Spares Kit
II37928	II40100F	Filter Cartridge
	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II37930	I87122004	Heater Plug
	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
II37933	I880940051	Gasket Set

Part Number	Kit Number	Description
II37933	I90586	Seal Kit
II37940	II17771008	Spares Kit
II37950	I92489008	Spares Kit
II37962	I71243	Piston And Cylinder
	I755660052	Gaskets
	I81169	Piston
	I811690062	Piston Rings (Std)
	I850280051	Gasket Set
II38005F	II19762004	Heater Plug (Type B2)
	II37464	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II38036F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38037F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339830064	Rubber Bush Guidance Kit
	II358510062	Guide And Seal Kit (Rubber Boot)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38038F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38039F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38046F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38047F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38097F	II38097F008	Seal Kit
	II38513F0062	Spring Portion
II38302F	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II40100F	Filter Cartridge
II38303F	II376770051	Gasket Set
	II40100F	Filter Cartridge
II38304F	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II40100F	Filter Cartridge

Spares kits

Part Number	Kit Number	Description
II38305F	II376770051	Gasket Set
	II40100F	Filter Cartridge
	II325810051	Gasket Set
II38308F	II325810061	Spares Kit
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II40100F	Filter Cartridge
II38309F	II325810051	Gasket Set
	II325810061	Spares Kit
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II40100F	Filter Cartridge
II38310F	II325810051	Gasket Set
	II325810061	Spares Kit
	II325820051	O-Ring
	II35529004	Heater Plug (APU's)
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II37680	Four Circuit Prot. Valve
	II37680008	Spares Kit
	II38308F	Air Dryer
	II40100F	Filter Cartridge
	II325810051	Gasket Set
II38311F	II325810061	Spares Kit
	II325820051	O-Ring
	II35529004	Heater Plug (APU's)
	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II37680	Four Circuit Prot. Valve
	II37680008	Spares Kit
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
II38313F	II37677008	Spares Kit
	II37679	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
II38315F	II376720051	Gasket Set
	II38677F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
II38317F	II376720051	Gasket Set
	II38677F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
II38319F	II376720051	Gasket Set
	II38677F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
II38340F	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
II38341F	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II38344F	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit

Part Number	Kit Number	Description
II38344F	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II38345F	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
II38350F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38351F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
II38352F	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II38353F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
II38363F	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
II38364F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38365F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit

Spares kits



Part Number	Kit Number	Description
II38365F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II38366F	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38367F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38368F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38522F	I81169	Piston
	I811690062	Piston Rings (Std)
II38610F	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
II38613F	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
II38615F	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II40100F	Filter Cartridge
II38617F	II19762004	Heater Plug (Type B2)
	II40100F	Filter Cartridge
II38619F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II38620F	0484210017000	Silencer
	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II38630F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38631F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38632F	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	K000358	Brake Carrier

Part Number	Kit Number	Description
II38632F	K000944	Tappet & Boot Kit
	K001537	Brake Pad Kit
II38633F	II17934004	Adjuster Cap Kit
	II30679004	Brake Pad Retainer
	K000358	Brake Carrier
	K000944	Tappet & Boot Kit
	K001537	Brake Pad Kit
II38635F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38648F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38648FM2	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II328090061	Gasket Set
	II339680062	Guide And Seal Kit (Rubber Boot)
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	K000935	Brass Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
II38649F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38649FM2	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II328090061	Gasket Set
	II339680062	Guide And Seal Kit (Rubber Boot)
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	K000935	Brass Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
II38672F	0484210017000	Silencer
	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II38724F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38725F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)

Spares kits

Part Number	Kit Number	Description
II38725F	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38726F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38727F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38728F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38729F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38744F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II38745F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II38745F	II35529004	Heater Plug (APU's)
II38776F	I811690062	Piston Rings (Std)
	II159920065	End Cover Assembly
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	SEB00967004	Con Rod Assembly
II38777F	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920065	End Cover Assembly
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	SEB00967004	Con Rod Assembly
II38779F	I811690062	Piston Rings (Std)
	II159920065	End Cover Assembly
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	SEB00967004	Con Rod Assembly
	SEB01034004	Valve Plate Assembly
II38788F	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set

Part Number	Kit Number	Description
II38788F	II36247008	Spares Kit
	II40100F	Filter Cartridge
II38797F	II37680008	Spares Kit
II38798F	II30654004	Heater Plug
	II362450051	Gasket Set
	II36245008	Spares Kit
	II40100F	Filter Cartridge
II38799F	II19762004	Heater Plug (Type B2)
	II37464	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II38810F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38811F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II38814F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38815F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38816F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38817F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38824F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit

Spares kits

Part Number	Kit Number	Description
II38825F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II38931F	II358760061	Spring Portion
II39000F	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39001F	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000027	Brake Carrier Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II39002F	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304080061	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II39006F	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrod 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II39007F	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrod 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
II39018F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrod 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II39034F	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II39035F	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)

Part Number	Kit Number	Description
II39035F	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39036F	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39037F	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39044F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39046F	II328090062
II368470064		Rubber Bush Guidance Kit
II39769F0062		Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39047F	II328090062
II368470064		Rubber Bush Guidance Kit
II39769F0062		Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39048F	II328090062
II368470064		Rubber Bush Guidance Kit
II39769F0062		Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39049F	II328090062
II368470064		Rubber Bush Guidance Kit
II39769F0062		Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39052F	II19762004
II35529004		Heater Plug (APU's)
II376720051		Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II38745F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set

Spares kits

Part Number	Kit Number	Description
II39054F	II36247008	Spares Kit
	II40100F	Filter Cartridge
	II180220062	Brake Pad Kit (Jurid 539FF)
II39061F	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39062F	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39068F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	II39116F0061	Wear Indicator Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39069F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	II39116F0061	Wear Indicator Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39077F	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920065	End Cover Assembly
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	SEB00967004	Con Rod Assembly
	SEB01034004	Valve Plate Assembly
	II39078F	I81169
II39078F	I811690062	Piston Rings (Std)
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	SEB00967004	Con Rod Assembly
	SEB01034004	Valve Plate Assembly
II39080F	I81169	Piston
	I811690062	Piston Rings (Std)
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	SEB00967004	Con Rod Assembly
	SEB01034004	Valve Plate Assembly
II39121F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II37463	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II40100F	Filter Cartridge
II39122F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II37463	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II40100F	Filter Cartridge
II39123F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II37463	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II40100F	Filter Cartridge

Part Number	Kit Number	Description
II39151F	I77246	Piston And Cylinder
	I810580052	Gaskets
	I887830051	Gasket Set
	II38717F004	Reed Valve Kit
	II39152F	I12770
	II39152F	Inlet Control Valve
II39251F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39252F	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39258F	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39259F	K000375
II39259F	K000944	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39264F	II180220062
II39264F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II39265F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
II39266F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39267F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39294F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39295F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)

Spares kits

Part Number	Kit Number	Description
II39295F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39298F	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II39299F	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39299F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II39521F	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II39522F	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II39530F	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
II39544F	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39545F	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II39740F	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39748F	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II39751F	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II39752F	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II39838M3	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
II39839M3	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Part Number	Kit Number	Description
II39839M3	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
II39840M3	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II39841M3	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39844	K001301	Bellows Cap Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
II39844F	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
II39845	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
II39845F	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
II39848	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39849	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
II39866F	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
II39867F	K001301	Bellows Cap Kit
	II325810051	Gasket Set
	II325810061	Spares Kit
	II325820051	O-Ring
II39867F	II362510061	Exhaust Cover
	II36251008	Spares Kit
	II37680008	Spares Kit
	II38797F	Four Circuit Prot. Valve
II39867F	II40100F	Filter Cartridge
	I851330051	Gasket Set
	I87917	Service Kit

Spares kits



Part Number	Kit Number	Description
II39867F	II30654004	Heater Plug
	II40100F	Filter Cartridge
II39884F	II40100F	Filter Cartridge
II40096F	II31733008	Spares Kit
II40133F	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
II40232F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II40233F	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
II40265F	I771060051	Gasket Set
	I771060052	Gaskets
	II38717F004	Reed Valve Kit
II40277F	II17974004	Reed Valve Kit
	II179740061	Reed Valve Kit
	II308970051	Gasket Set
	II39526F0061	Piston Rings
II40278F	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II173970051	Gasket Set
	II173970052	Gaskets
	II38715F004	Reed Valve Kit
	II39526F0061	Piston Rings
II40280F	I771060051	Gasket Set
	I771060052	Gaskets
	I77246	Piston And Cylinder
	II38717F004	Reed Valve Kit
II40381F	I935810051	Gasket Set
II40542F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II37679	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II40543F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II37679	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II40555F	Air Dryer
II40544F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II37679	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II40545F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II38677F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II40546F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II38677F	Four Circuit Prot. Valve

Part Number	Kit Number	Description
II40546F	II40100F	Filter Cartridge
II40547F	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II38677F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II40548F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II38745F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
	II40555F	Air Dryer
II40549F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II38745F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II40550F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II38745F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
II40551F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II37463	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II40100F	Filter Cartridge
II40552F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II37463	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II40100F	Filter Cartridge
II40553F	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II37463	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II40100F	Filter Cartridge
II40554F	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II40555F	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II40556F	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
II40557F	II19762004	Heater Plug (Type B2)
	II40100F	Filter Cartridge
II40558F	II19762004	Heater Plug (Type B2)
	II40100F	Filter Cartridge
II40559F	II19762004	Heater Plug (Type B2)
	II40100F	Filter Cartridge
K000002	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Spares kits

Part Number	Kit Number	Description
K000002	K001301	Bellows Cap Kit
K000003	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
K000005	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
K000006	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000007	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
K000008	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
K000011	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000012	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
K000043	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
K000044	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000045	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
K000046	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit

Part Number	Kit Number	Description
K000051	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000052	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000115	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	K000375	Guide And Seal Kit (Steel Cap)
K000116	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000136	II368470064	Rubber Bush Guidance Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
K000137	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
K000138	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000139	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
K000166	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
K000167	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit

Spares kits

Part Number	Kit Number	Description
K000212	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000213	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000229	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II159920065	End Cover Assembly
	II159920066	Bearing
K000236	II344040051	Cylinder Head Gasket
	II39526F0061	Piston Rings
	II159920051	Cylinder Head Gaskets
	II159920063	ESS Kit
K000258	II159920065	End Cover Assembly
	II159920066	Bearing
	II326840061	Inlet Reed
	II39526F0061	Piston Rings
K000259	SEB00967004	Con Rod Assembly
	SEB01033004	Valve Plate Assembly
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
K000260	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II38863F0062	Brake Pad Kit
K000261	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000262	K001301	Bellows Cap Kit
	II38863F0062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
K000263	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
K000274	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000275	K001301	Bellows Cap Kit
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II186040061	Inlet Reed
K000274000	II39526F0061	Piston Rings
	II14777004	Reed Valve Kit
	II186040061	Inlet Reed
	II39526F0061	Piston Rings
K000300	II377570051	Gasket Set
	II39526F0061	Piston Rings
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000300	K000945	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Part Number	Kit Number	Description
K000300	K001301	Bellows Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000301	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
K000302	II180220062	Brake Pad Kit (Jurid 539FF)
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	II180220062	Brake Pad Kit (Jurid 539FF)
K000303	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K000375	Guide And Seal Kit (Steel Cap)
	K000305	Brake Pad Kit (Ferrodo 4550)
K000304	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
K000305	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
K000306	K000026	Brake Carrier
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	II180220062	Brake Pad Kit (Jurid 539FF)
K000307	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
K000308	K000026	Brake Carrier
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	II180220062	Brake Pad Kit (Jurid 539FF)
K000309	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000310	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
K000312	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000314	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
K000315	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000316	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
K000320	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000320	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)

Spares kits

Part Number	Kit Number	Description
K000320	K000375	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000321	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000322	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000323	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
K000336	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	1487010159000	Heater Kit
	1487010316000	Unloader Kit
K000386	1487010317000	Purge Valve Kit
	1487010318000	Check Valve Kit
	II40100F	Filter Cartridge
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
K000387	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000390	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000391	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	0484210017000	Silencer
	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
K000392	II40100F	Filter Cartridge
	0484210017000	Silencer
	II19762004	Heater Plug (Type B2)
	II376770051	Gasket Set
	II40100F	Filter Cartridge
K000394	II19762004	Heater Plug (Type B2)
	II37464	Four Circuit Prot. Valve
	II376720051	Gasket Set
	II376770051	Gasket Set
	II40100F	Filter Cartridge
K000395	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II38749F	Four Circuit Prot. Valve
	II40100F	Filter Cartridge
K000396	II19762004	Heater Plug (Type B2)
	II37464	Four Circuit Prot. Valve

Part Number	Kit Number	Description
K000396	II376720051	Gasket Set
	II376770051	Gasket Set
	II40100F	Filter Cartridge
K000412	II38863F0062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000413	K001301	Bellows Cap Kit
	II38863F0062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
K000445	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K001104	Brake Pad Kit (Ferrodo 4550)
	II180220062	Brake Pad Kit (Jurid 539FF)
K000446	K001104	Brake Pad Kit (Ferrodo 4550)
	K000366	Tappets Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
K000475	K001104	Brake Pad Kit (Ferrodo 4550)
	K000366	Tappets Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
K000476	K001104	Brake Pad Kit (Ferrodo 4550)
	II14525	Assembly Grease
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000366	Tappets Kit
K000477	K000472	Guide And Seal Kit (Steel Cap)
	II14525	Assembly Grease
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000366	Tappets Kit
K000479	K000472	Guide And Seal Kit (Steel Cap)
	I87122004	Heater Plug
	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
K000485	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000486	K001301	Bellows Cap Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
K000487	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000488	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000502	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000502	K000375	Guide And Seal Kit (Steel Cap)

Spares kits

Part Number	Kit Number	Description
K000502	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K000503	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000504	K001301	Bellows Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000505	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
K000517	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
K000518	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
K000550	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
K000551	K001301	Bellows Cap Kit
	K001531	Brake Carrier
	II180220062	Brake Pad Kit (Jurid 539FF)
K000552	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000553	K001301	Bellows Cap Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
K000584	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000585	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	K000375	Guide And Seal Kit (Steel Cap)
K000719	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Part Number	Kit Number	Description
K000719	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
K000720	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
K000740	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
K000741	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	I81169	Piston
K000754	I811690062	Piston Rings (Std)
	II14777004	Reed Valve Kit
	II147860051	Gasket Set
K000755	II186040061	Inlet Reed
	I81169	Piston
	I811690062	Piston Rings (Std)
K000773	II14777004	Reed Valve Kit
	II147860051	Gasket Set
	II186040061	Inlet Reed
K000774	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set
	II36247008	Spares Kit
K000782	II40100F	Filter Cartridge
	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set
K000783	II36246008	Spares Kit
	II40100F	Filter Cartridge
	II180220062	Brake Pad Kit (Jurid 539FF)
K000815	K000026	Brake Carrier
	K000472	Guide And Seal Kit (Steel Cap)
	II180220062	Brake Pad Kit (Jurid 539FF)
K000816	K000026	Brake Carrier
	K000472	Guide And Seal Kit (Steel Cap)
	II39756F0062	Brake Pad Kit (Textar T7400)
K000822	K000026	Brake Carrier
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000026	Brake Carrier
K000823	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
K000826	K001301	Bellows Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K000827	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K000870	II180220062	Brake Pad Kit (Jurid 539FF)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit

Spares kits

Part Number	Kit Number	Description
K000870	K000934	Brake Pad Kit (Textar T3030)
K000871	K000472	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
K000872	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
K000873	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
K000993	II180220062	Brake Pad Kit (Jurid 539FF)
	K000472	Guide And Seal Kit (Steel Cap)
K000994	II180220062	Brake Pad Kit (Jurid 539FF)
	K000472	Guide And Seal Kit (Steel Cap)
K001056	II19762004	Heater Plug (Type B2)
	II362450051	Gasket Set
	II36247008	Spares Kit
	II40100F	Filter Cartridge
K001071	I935810051	Gasket Set
K001115	K000026	Brake Carrier
	K001104	Brake Pad Kit (Ferrodo 4550)
K001116	K000026	Brake Carrier
	K001104	Brake Pad Kit (Ferrodo 4550)
K001117	K000472	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
K001118	K000472	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
K001164	II180220062	Brake Pad Kit (Jurid 539FF)
	K000472	Guide And Seal Kit (Steel Cap)
K001165	II180220062	Brake Pad Kit (Jurid 539FF)
	K000472	Guide And Seal Kit (Steel Cap)
K001169	II180220062	Brake Pad Kit (Jurid 539FF)
K001170	II180220062	Brake Pad Kit (Jurid 539FF)
K001197	I87122004	Heater Plug
	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
K001228	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K001229	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K001232	II39756F0062	Brake Pad Kit (Textar T7400)
	K000472	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
K001233	II39756F0062	Brake Pad Kit (Textar T7400)
	K000472	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000684	Wear Indicator Kit with Extension
K001312	II180220062	Brake Pad Kit (Jurid 539FF)
	K000472	Guide And Seal Kit (Steel Cap)
K001313	II180220062	Brake Pad Kit (Jurid 539FF)
	K000472	Guide And Seal Kit (Steel Cap)
K001319	1507010045000	Service Kit
K001336	II39756F0062	Brake Pad Kit (Textar T7400)
	K000945	Adjuster Cap Kit
K001337	II39756F0062	Brake Pad Kit (Textar T7400)
	K000945	Adjuster Cap Kit
K001352	II14525	Assembly Grease
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit

Part Number	Kit Number	Description
K001352	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000374	Gasket Set
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001353	II14525	Assembly Grease
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000374	Gasket Set
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001356	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000696	Brass Guidance/Steel Cap
	K000697	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001357	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000696	Brass Guidance/Steel Cap
	K000697	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001358	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001359	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001364	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K001365	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K001413	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
K001414	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
K001419	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K001104	Brake Pad Kit (Ferrodo 4550)
K001420	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier

Spares kits

Part Number	Kit Number	Description
K001420	K001104	Brake Pad Kit (Ferrodo 4550)
K001446	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
K001447	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
K001448	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
K001449	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II40100F	Filter Cartridge
K001450	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II40100F	Filter Cartridge
K001451	II16774004	Clamping Sleeve Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II354110061	Clamping Sleeve
K001452	II16774004	Clamping Sleeve Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	II354110061	Clamping Sleeve
K001453	II19762004	Heater Plug (Type B2)
	II376720051	Gasket Set
	II40100F	Filter Cartridge
K001454	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
K001455	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
K001456	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II376770051	Gasket Set
	II37677008	Spares Kit
	II40100F	Filter Cartridge
K001457	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II40100F	Filter Cartridge
K001458	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II40100F	Filter Cartridge
K001459	II19762004	Heater Plug (Type B2)
	II35529004	Heater Plug (APU's)
	II376720051	Gasket Set
	II40100F	Filter Cartridge
K001460	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000696	Brass Guidance/Steel Cap

Part Number	Kit Number	Description
K001460	K000697	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K001461	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000696	Brass Guidance/Steel Cap
	K000697	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K001589	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K001590	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
K001611	I93078004	Cylinder Head
	I930790061	Reed Valve Kit
	II173970051	Gasket Set
	II173970052	Gaskets
	II38715F004	Reed Valve Kit
	II39526F0061	Piston Rings
K001654	K000472	Guide And Seal Kit (Steel Cap)
K001655	K000472	Guide And Seal Kit (Steel Cap)
K001659	K000472	Guide And Seal Kit (Steel Cap)
K001660	K000472	Guide And Seal Kit (Steel Cap)
K001763	II376580062	Brake Pad Kit
K001764	II376580062	Brake Pad Kit
K001765	II380280062	Pad Set
K001766	II380280062	Pad Set
K001767	II376580062	Brake Pad Kit
	K000945	Adjuster Cap Kit
K001768	II376580062	Brake Pad Kit
	K000945	Adjuster Cap Kit
K001769	II380280062	Pad Set
	K000945	Adjuster Cap Kit
K001770	II380280062	Pad Set
	K000945	Adjuster Cap Kit
K001896	II14525	Assembly Grease
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000374	Gasket Set
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K001897	II14525	Assembly Grease
	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000362	Mounting Bolt Kit
	K000374	Gasket Set
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
K002010	II39756F0062	Brake Pad Kit (Textar T7400)
	K001301	Bellows Cap Kit
K002011	II39756F0062	Brake Pad Kit (Textar T7400)
	K001301	Bellows Cap Kit
K002107	II377800062	Brake Pad Kit

Spares kits

Part Number	Kit Number	Description
K002108	II377800062	Brake Pad Kit
K002118	II14525	Assembly Grease
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000129	Pad Retainer Kit
	K000362	Mounting Bolt Kit
	K000374	Gasket Set
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K001301	Bellows Cap Kit
K002119	II14525	Assembly Grease
	II304130065	Tappets Kit
	II39769F0063	Steel Cap Kit
	K000129	Pad Retainer Kit
	K000362	Mounting Bolt Kit
	K000374	Gasket Set
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K001104	Brake Pad Kit (Ferodo 4550)
	K001301	Bellows Cap Kit
K002135	I87122004	Heater Plug
	II362450051	Gasket Set
	II36246008	Spares Kit
	II40100F	Filter Cartridge
K002759	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002760	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002783	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002784	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002785	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002786	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002789	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002790	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002793	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002794	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002874	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002875	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002878	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002879	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit

Part Number	Kit Number	Description
K002915	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002916	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002919	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002920	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002923	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002924	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002962	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002963	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002964	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002965	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002966	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002967	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002968	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K002969	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K003192	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K003193	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K003386	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K003387	K000029	Adjuster Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
K003779	K000029	Adjuster Cap Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001300	Tappet & Boot Kit
K003780	K000029	Adjuster Cap Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001300	Tappet & Boot Kit
K003781	K000029	Adjuster Cap Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001300	Tappet & Boot Kit
K003782	K000029	Adjuster Cap Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001300	Tappet & Boot Kit

Spares kits

Part Number	Kit Number	Description
K2B0502XU	K2B0002XU	Spring Portion
K2B0506XU	K2B0006SX	Spring Portion
K2B0513XU	234100K	Diaphragm
K2B0514XU	K2B0014SX	Spring Portion
K2B0521XU	K2B0021SX	Spring Portion
K2B0522XU	K2B0022XU	Spring Brake (Remote)
K2B0526XU	234099K	Diaphragm
K2B0528XU	K2B0028XUA	Spring Portion
K2B0542XU	234101K	Diaphragm
	K2B0042XUA	Spring Portion
K2B0543XU	K2B0043XUA	Spring Portion
K2B0550XU	K2B0006SX	Spring Portion
K2B1000	K2B0028XUA	Spring Portion
K2B1001	234101K	Diaphragm
	K2B0043XUA	Spring Portion
K2B1008	K2B0021XUB	Spring Portion
K2B1018	K2B0028XUA	Spring Portion
K2B1019	K2B0028XUA	Spring Portion
K2B1022	228790	Yoke
	K2B0043XUA	Spring Portion
K2B1023	228790	Yoke
	K2B0043XUA	Spring Portion
K2B1024	228790	Yoke
	K2B0043XUA	Spring Portion
K2B1025	228790	Yoke
	K2B0043XUA	Spring Portion
K2B1030	K2B0006SX	Spring Portion
K2B1031	K2B0006SX	Spring Portion
K2B1034	K2B0014XU	Spring Portion
K2B1036	K2B0014XU	Spring Portion
K2B1037	K2B0004XUB	Spring Portion
K2B1045	295517	Yoke
	K2B0022XU	Spring Brake (Remote)
K2B1060	K2B0042XUA	Spring Portion
K2B1101XU	234101K	Diaphragm
	K2B0021SX	Spring Portion
K2B1144	K2B0021XUB	Spring Portion
K2B1145	K2B0021XUB	Spring Portion
K2B1154XU	K2B0042XUA	Spring Portion
K2B1178	234100K	Diaphragm
	K2B0021XUB	Spring Portion
K2B1187	K2B0021XUB	Spring Portion
K2B1188	K2B0021XUB	Spring Portion
K2B1193	K2B0022XU	Spring Brake (Remote)
K2B1194	K2B0021XUB	Spring Portion
K2B1195	K2B0021XUB	Spring Portion
K2B1204	K2B0043XUA	Spring Portion
K2B1207	K2B0028XUA	Spring Portion
K2B1208	K2B0028XUA	Spring Portion
K2C0527XU	234100K	Diaphragm
K2C0612	234362	Diaphragm
K2C2002XU	K2B0042XUA	Spring Portion
K2C2004XU	K2B0042XUA	Spring Portion
K2D0706	234100K	Diaphragm
K2E4002XU	272489	Diaphragm
KW2966/1	1186555SP	Check Valve
KX1058/1	SK2704/1	Spares Kit
KX1101/1	SK2648/1	Service Kit
KX1130/1	SK2604/2	Service Kit
KX1130/4	SK2604/2	Service Kit
KX1294/1	SK2801/1	Diaphragm and Exhaust Flap
KX1294/2	SK2801/1	Diaphragm and Exhaust Flap
KX2000/1	SK2802/1	Diaphragm
KX2068/1	SK2729/2	Service Kit
KX2068/2	SK2729/2	Service Kit
KX2068/2SP	SK2729/2	Service Kit

Part Number	Kit Number	Description
KX2068/3	SK2729/2	Service Kit
KX2068/4	SK2729/2	Service Kit
KX2068/5	SK2729/2	Service Kit
KX2068/7	SK2729/2	Service Kit
KX2068/8	SK2729/2	Service Kit
KX2196/1	SK2801/2	Diaphragm
KX2408/1	SK2764/1	Service Kit
KX2408/2	SK2764/1	Service Kit
KX2552/2	SK2801/1	Diaphragm and Exhaust Flap
KX2552/3	SK2801/3	Diaphragm
KX2601/2	SK2889/1	Service Kit
KX2606/2	SK2889/1	Service Kit
KX424/8	SK2615/1	Service Kit
KY1001/1SP	SK2677/1	Service Kit
KY1038/3	SK2639/2	Service Kit
KY1396/1	SK2764/1	Service Kit
KY1497/1	SK2677/1	Service Kit
KY1640/1	SK2661/2	Spares Kit
KY1657/1	SK2826/1	Service Kit
KY1657/2	SK2826/1	Service Kit
KY1657/3	SK2826/1	Service Kit
KY1661/1	SK2634/2	Service Kit
KY1683/1	SK2634/2	Service Kit
KY1684/1	SK2634/2	Service Kit
KY1767/11	SK2814/2	Service Kit
KY1767/4	SK2814/2	Service Kit
KY1767/5	SK2814/2	Service Kit
KY1767/8	SK2814/2	Service Kit
KY1767/9	SK2814/2	Service Kit
KY1804/6	SK2819/2	Service Kit
KY1804/7	SK2819/2	Service Kit
KY1804/8	SK2819/2	Service Kit
KY1804/9	SK2819/2	Service Kit
KY1810/1	SK2826/1	Service Kit
KY1916/1	295579XU	Foot Brake Valve
	SK2814/2	Service Kit
	SK3027/1	Treadle Assembly
KY1916/3	1189389XU	Foot Brake Valve
	SK2814/2	Service Kit
KY1916/4	SK2814/2	Service Kit
KY1929/1	SK2639/2	Service Kit
KY1988/1	SK2634/2	Service Kit
KY1994/2SP	SK2639/2	Service Kit
KY1995/1	SK2819/2	Service Kit
KY1995/2	SK2819/2	Service Kit
KY1995/3	SK2819/2	Service Kit
KY1995/4	SK2819/2	Service Kit
KY2106/3	SK2842/1	Service Kit
KY2106/5	SK2842/1	Service Kit
KY2106/6	SK2842/1	Service Kit
KY2111/7	SK2842/1	Service Kit
KY2184/1	SK2639/1	Service Kit
KY2481/1	234100K	Diaphragm
KY2590/3	SK2889/1	Service Kit
KY2590/4	SK2889/1	Service Kit
KY807/1	SK2639/1	Service Kit
KY881/2	SK2639/1	Service Kit
KY881/3	SK2639/1	Service Kit
KY890/1	SK2639/2	Service Kit
KY932/10	SK2699/2	Service Kit
	SK2774/1	Cover
KY932/7	SK2699/2	Service Kit
	SK2774/1	Cover
KY932/8	SK2699/2	Service Kit
	SK2774/1	Cover
KY952/4	SK2639/1	Service Kit

Spares kits

Part Number	Kit Number	Description
KY982/1	SK2639/2	Service Kit
KY982/2	SK2639/2	Service Kit
KY982/6	SK2639/2	Service Kit
KZ1030/1	SKR2876/00	Piston Rings
KZ1030/2	SKR2876/00	Piston Rings
KZ1087/4	SK2955/1	Reed Valve Kit
	SK2997/1	Gasket Set
KZ1114/1	SK2871/1	Disc Valve Set
	SKR2825/00	Piston Rings
KZ1115/2	SKR2825/00	Piston Rings
KZ1123/2RM	K2B0028XUA	Spring Portion
KZ1124/2RM	K2B0043XUA	Spring Portion
KZ1133/2RM	K2B0004XUB	Spring Portion
KZ1134/2RM	K2B0006SX	Spring Portion
KZ1137/1	SK2639/1	Service Kit
KZ1143/1	KX2033/2SP	Cylinder Head
	SK2871/2	Disc Valve Set
	SKR2876/00	Piston Rings
KZ1143/4	KX2033/2SP	Cylinder Head
	SK2871/2	Disc Valve Set
	SKR2876/00	Piston Rings
KZ1174/1	1189902	Diaphragm
KZ1174/2	1189902	Diaphragm
KZ1176/7	234433K	Diaphragm
KZ1177/11	234433K	Diaphragm
	KY2379/1XU	Spring Portion
KZ1177/12	KY2379/1XU	Spring Portion
KZ1177/13	234433K	Diaphragm
	KY2379/1XU	Spring Portion
KZ1177/7	234433K	Diaphragm
	KY2379/1XU	Spring Portion
KZ1177/8	234433K	Diaphragm
	KY2379/1XU	Spring Portion
KZ1192/1	234433K	Diaphragm
	KY2386/1XU	Spring Portion
KZ1192/2	234433K	Diaphragm
	KY2386/1XU	Spring Portion
KZ1210/1	SK2835/1	Service Kit
KZ1235/2RM	K2B0002XU	Spring Portion
KZ1252/3	234433K	Diaphragm
KZ1252/4	234433K	Diaphragm
KZ1254/3	1189902	Diaphragm
KZ1257/3	1189201SP	Piston Assembly
	SKR2876/00	Piston Rings
KZ1265/1	SKR2876/00	Piston Rings
KZ1285/1	234226K	Diaphragm
KZ1286/1	234189K	Diaphragm
	K2B0001XU	Spring Portion
KZ1286/3	K2B0001XU	Spring Portion
KZ1289/3	234226K	Diaphragm
KZ1289/4	234226K	Diaphragm
KZ1290/3	234189K	Diaphragm
KZ1290/4	234189K	Diaphragm
KZ1310/1	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
KZ1310/2	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
KZ1310/4	SK2961/1	Purge Valve Kit
KZ1327/1	KX1729/3	Safety Valve
KZ1331/2RM	K2B0006SX	Spring Portion
KZ1341/1	SK2904/2	Unloader Kit
	SK2961/1	Purge Valve Kit
KZ396/3	SK2681/5	Gasket and Unloader Kit
KZ433/5	KZ645/3SP	Cylinder Head
	SK2681/5	Gasket and Unloader Kit
KZ433/5SP	SK2681/5	Gasket and Unloader Kit

Part Number	Kit Number	Description
KZ433/6	KZ645/3SP	Cylinder Head
	SK2681/5	Gasket and Unloader Kit
KZ488/11RM	K2B0042XUA	Spring Portion
KZ596/7A	295277	Yoke
KZ641/1	SK2681/5	Gasket and Unloader Kit
KZ642/2	SK2681/5	Gasket and Unloader Kit
KZ758/1A	K2B0021SX	Spring Portion
KZ758/1ARM	K2B0021SX	Spring Portion
KZ774/1RM	K2B0042XUA	Spring Portion
KZ774/2	234101K	Diaphragm
	K2B0043XUA	Spring Portion
KZ774/2RM	K2B0043XUA	Spring Portion
KZ775/2	234100K	Diaphragm
	K2B0028XUA	Spring Portion
KZ778/2	234099K	Diaphragm
KZ794/1RM	K2B0042XUA	Spring Portion
KZ794/2RM	K2B0042XUA	Spring Portion
KZ794/4	234101K	Diaphragm
	K2B0042XUA	Spring Portion
KZ794/4RM	K2B0042XUA	Spring Portion
KZ801/4	SKR2825/00	Piston Rings
KZ802/5RM	KX2033/2SP	Cylinder Head
KZ802/5XU	KX2033/2SP	Cylinder Head
KZ803/5	KX2033/2SP	Cylinder Head
KZ804/2	234099K	Diaphragm
	K2B0004XUB	Spring Portion
KZ804/2RM	K2B0004XUB	Spring Portion
KZ805/2	234100K	Diaphragm
	K2B0006SX	Spring Portion
KZ805/2RM	K2B0006SX	Spring Portion
KZ806/2	234101K	Diaphragm
	K2B0021SX	Spring Portion
KZ806/2RM	K2B0021SX	Spring Portion
KZ807/1	234362	Diaphragm
KZ894/3	234433K	Diaphragm
	SK2801/1	Diaphragm and Exhaust Flap
KZ897/9RM	K2B0042XUA	Spring Portion
KZ961/1	KX2033/2SP	Cylinder Head
KZ965/12RM	K2B0028XUA	Spring Portion
KZ965/2RM	228790	Yoke
KZ974/1RM	228790	Yoke
MP11CX	AC784B	Test Connector
MP12BY	AC784B	Test Connector
MP13AX	076634902000	Complete Overhaul Kit
	076645704000	Filter
	MPA51330	Lever
MP51AX	076634902000	Complete Overhaul Kit
	076645704000	Filter
	MPA51330	Lever
MP51AY	076634902000	Complete Overhaul Kit
	076645704000	Filter
	MPA51330	Lever
MP51CY	076634902000	Complete Overhaul Kit
	076645704000	Filter
	MPA51330	Lever
MP70A	076636502000	Complete Overhaul Kit
MP71A	076636502000	Complete Overhaul Kit
MP71B	076636502000	Complete Overhaul Kit
MS10A	076636502000	Complete Overhaul Kit
MS10B	076636502000	Complete Overhaul Kit
MS10C	076636502000	Complete Overhaul Kit
MS10D	076636502000	Complete Overhaul Kit
SDM2EK	076664701000	Spares Kit
SDM2G	076664701000	Spares Kit
SDM2GA	076664701000	Spares Kit
SDM2H	076664701000	Spares Kit

Spares kits



Part Number	Kit Number	Description
SEB00003	I55591	Spares Kit
SEB00038	SEB22069	Spares Kit
SEB00039	SEB22069	Spares Kit
SEB00048	SEB22068	Spares Kit
SEB00176	SEB22068	Spares Kit
SEB00214	SEB22069	Spares Kit
SEB00227	I71420	Coupling Head
SEB00228	I71421	Coupling Head
SEB00243	SEB22106	Spares Kit
SEB00271	SEB22069	Spares Kit
SEB00285	SEB22130	Spares Kit
SEB00295	SEB22144	Spares Kit
SEB00348	SEB22197	Cylinder Head Gasket
SEB00406	SEB22068	Spares Kit
SEB00407	SEB22068	Spares Kit
SEB00408	SEB22068	Spares Kit
SEB00409	SEB22068	Spares Kit
SEB00416	SEB22149	Spares Kit
SEB00440	SEB22141	Spares Kit
SEB00457	SEB22141	Spares Kit
SEB00458	SEB22141	Spares Kit
SEB00480	SEB22145	Spares Kit
SEB00514	SEB22137	Spares Kit
SEB00624	SEB22141	Spares Kit
SEB00631	SEB22145	Spares Kit
SEB00638	SEB22141	Spares Kit
SEB00650	SEB22197	Cylinder Head Gasket
SEB00651	SEB22188	Spares Kit
SEB00658	SEB22188	Spares Kit
SEB00659	SEB22187	Spares Kit
SEB00661	SEB22187	Spares Kit
SEB00662	SEB22157	Spares Kit
SEB00667	SEB22157	Spares Kit
SEB00669	SEB22158	Spares Kit
SEB00670	SEB22158	Spares Kit
SEB00671	SEB22158	Spares Kit
SEB00672	SEB22158	Spares Kit
SEB00683	SEB22193	Spares Kit
	SEB221931	Spares Kit
SEB00786	SEB22172	Spares Kit
SEB00787	SEB22158	Spares Kit
SEB00791	SEB22172	Spares Kit
SEB00792	SEB22172	Spares Kit
SEB00820	SEB22198	Spares Kit
SEB00836	SEB22452	Spares Kit
SEB00846	SEB22069	Spares Kit
SEB00874	SEB22172	Spares Kit
SEB00875	SEB22172	Spares Kit
SEB00882	SEB22137	Spares Kit
SEB00907	SEB22371	Spares Kit
SEB00952	SEB22185	Spares Kit
SEB00953	SEB22185	Spares Kit
SEB00954	SEB22185	Spares Kit
SEB00981	SEB22330	Spares Kit
SEB00984	SEB22330	Spares Kit
SEB01042	SEB22329	Spares Kit
SEB01067	SEB22187	Spares Kit
SEB01091	SEB22188	Spares Kit
SEB01098	SEB22183	Spares Kit
SEB01115	SEB22144	Spares Kit
SEB01120	SEB22183	Spares Kit
SEB01145	SEB22145	Spares Kit
SEB01149	SEB22149	Spares Kit
	SEB22335	Spares Kit
	SEB22336	Spares Kit
SEB01151	SEB22197	Cylinder Head Gasket

Part Number	Kit Number	Description
SEB01151	SEB22224	Spares Kit
	SEB22225	Spares Kit
SEB01152	SEB22197	Cylinder Head Gasket
	SEB22224	Spares Kit
	SEB22225	Spares Kit
SEB01154	SEB22201	Spares Kit
SEB01156	SEB22201	Spares Kit
SEB01157	SEB22198	Spares Kit
SEB01158	SEB22201	Spares Kit
SEB01159	SEB22198	Spares Kit
SEB01160	SEB00937	Piston Assembly
	SEB22213	Cylinder Head Kit
SEB01162	SEB22069	Spares Kit
SEB01183	SEB22141	Spares Kit
SEB01205	SEB22145	Spares Kit
SEB01224	SEB22141	Spares Kit
SEB01251	SEB22144	Spares Kit
SEB01271	SEB22068	Spares Kit
SEB01273	SEB22144	Spares Kit
SEB01274	SEB22144	Spares Kit
SEB01279	SEB22187	Spares Kit
SEB01318	SEB22329	Spares Kit
SEB01362	SEB22330	Spares Kit
SEB01364	SEB22329	Spares Kit
SEB01426	SEB22371	Spares Kit
SEB01430	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01432	SEB22157	Spares Kit
SEB01452	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01455	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01472	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01476	SEB22141	Spares Kit
SEB01478	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01480	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01481	SEB22193	Spares Kit
SEB01485	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01487	SEB22141	Spares Kit
SEB01496	SEB22224	Spares Kit
	SEB22225	Spares Kit
	SEB22452	Spares Kit
SEB01545	SEB22224	Spares Kit
	SEB22225	Spares Kit
SEB01586	SEB22459	Gasket Set
	SEB22460	ESS Kit
	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01588	I81015004	Valve Plate Assembly
	I869090051	Cylinder Head Gasket
SEB01597	SEB22459	Gasket Set
	SEB22460	ESS Kit
	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01599	SEB22459	Gasket Set

Spares kits

Part Number	Kit Number	Description
SEB01599	SEB22460	ESS Kit
	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01601	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01602	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01603	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01604	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01605	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01759	SEB22459	Gasket Set
	SEB22460	ESS Kit
	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01768	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01781	II156970051	Head Gasket Kit
	II39528F004	Spares Kit
	II39528F0061	Piston Rings
	SEB00626004	Con Rod Assembly
	SEB01000004	Valve Plate Assembly
SEB01782	II156970051	Head Gasket Kit
	II39528F004	Spares Kit
	II39528F0061	Piston Rings
	SEB00626004	Con Rod Assembly
	SEB01000004	Valve Plate Assembly
SEB01783000	II344040051	Cylinder Head Gasket
	II39526F0061	Piston Rings
	SEB01034004	Valve Plate Assembly
SEB01784	II159920065	End Cover Assembly
	II159920066	Bearing
	II344040051	Cylinder Head Gasket
	II39526F0061	Piston Rings
	SEB01034004	Valve Plate Assembly
SEB01819	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SEB01841	SEB22461	Reed Valve Kit
	SEB22463	Piston Rings
SK3000/1	II40100F	Filter Cartridge
	KX2073/7	Safety Valve
SK3000/2	II40100F	Filter Cartridge
	KX2073/7	Safety Valve
SK3000/3	II40100F	Filter Cartridge
	KX1729/3	Safety Valve
SK3000/4	II40100F	Filter Cartridge
	KX1729/3	Safety Valve
T13886	I77517	Spares Kit
T47836	I74151	Spares Kit
T63354	I633540051	Gasket Set
	I80221	Spares Kit
T68180	I74151	Spares Kit
T74772	I84021	Spares Kit
T84866	I84021	Spares Kit
VPC2N	076669901000	Spares Kit
VPC2P	076669901000	Spares Kit
VPC2T	076669901000	Spares Kit
VPC3A	076669702000	Spares Kit
VPC3B	076669702000	Spares Kit
VPC3D	076669702000	Spares Kit
VPC3L	076669702000	Spares Kit
VPC4A	076669702000	Spares Kit
VPC4B	076669702000	Spares Kit
VPC4D	076669702000	Spares Kit

Part Number	Kit Number	Description
VPC4F	076669702000	Spares Kit
VPS30B	076637201000	Spares Kit
VPS38AIY	076637201000	Spares Kit
VPS38BIY	076637201000	Spares Kit
VPS40A	076670301000	Spares Kit
	076677701000	Spares Kit
VPS40AA	076670301000	Spares Kit
	076677701000	Spares Kit
VPS40AAY	076637201000	Spares Kit
VPS40CY	076637201000	Spares Kit
VPS41A	076670202000	Spares Kit
	076670501000	Spares Kit
VPS41AY	076637201000	Spares Kit
VPS41B	076670202000	Spares Kit
	076670501000	Spares Kit
VPS41BY	076637201000	Spares Kit
VPS41C	076670202000	Spares Kit
	076670501000	Spares Kit
VPS41CY	076637201000	Spares Kit
VPS45A	076637201000	Spares Kit
VPS45AY	076637201000	Spares Kit
VPS45C	076637201000	Spares Kit
VPS45HY	076637201000	Spares Kit
Y002809	SEB22371	Spares Kit
Y002810	SEB22371	Spares Kit
Z000276	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z000277	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000683	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z000652	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39462F0062	Brake Pad Kit (Ferrodo 4550)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z000653	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39462F0062	Brake Pad Kit (Ferrodo 4550)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z000723	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z000724	II180220062	Brake Pad Kit (Jurid 539FF)
	K000026	Brake Carrier
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z000725	K000026	Brake Carrier

Spares kits

Part Number	Kit Number	Description
Z000725	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z000726	K000026	Brake Carrier
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010001	II180220062	Brake Pad Kit (Jurid 539FF)
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010002	II180220062	Brake Pad Kit (Jurid 539FF)
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010003	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010004	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010291	II180220062	Brake Pad Kit (Jurid 539FF)
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010292	II180220062	Brake Pad Kit (Jurid 539FF)
	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010293	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010294	K000366	Tappets Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010671	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0010672	II350470062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II376580062	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0010911	II180220062	Brake Pad Kit (Jurid 539FF)
	K000027	Brake Carrier Kit
	K000366	Tappets Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010912	II180220062	Brake Pad Kit (Jurid 539FF)
	K000027	Brake Carrier Kit
	K000366	Tappets Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0010961	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0010962	II180220062	Brake Pad Kit (Jurid 539FF)
	II339680062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011201	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit

Part Number	Kit Number	Description
Z0011202	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011451	II376580062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011452	II376580062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011471	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011472	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011491	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011492	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000026	Brake Carrier
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011541	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011542	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011561	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011562	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit

Spares kits

Part Number	Kit Number	Description
Z0011581	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0011582	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000934	Brake Pad Kit (Textar T3030)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0013571	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000681	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0013572	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000681	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0013591	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0013592	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0013611	II180220062	Brake Pad Kit (Jurid 539FF)
Z0013612	II180220062	Brake Pad Kit (Jurid 539FF)
Z0013631	II180220062	Brake Pad Kit (Jurid 539FF)
Z0013632	II180220062	Brake Pad Kit (Jurid 539FF)
Z0014981M1	II180220062	Brake Pad Kit (Jurid 539FF)
	II304130065	Tappets Kit
	II328090061	Gasket Set
	II339660061	Wear Indicator Kit with Guide
	II339660062	Wear Indicator Kit
	II339680062	Guide And Seal Kit (Rubber Boot)
	II344730063	Bellows Cap Kit
	II368470064	Rubber Bush Guidance Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0014981M2	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0014982M1	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0015711	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0015712	II180220062	Brake Pad Kit (Jurid 539FF)

Part Number	Kit Number	Description
Z0015712	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000684	Wear Indicator Kit with Extension
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0015731	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0015732	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0015751	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0015752	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0016511	II376580062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0016512	II376580062	Brake Pad Kit
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0016571	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0016572	II180220062	Brake Pad Kit (Jurid 539FF)
	II310240061	Wear Indicator Kit
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0017261	K000366	Tappets Kit
	K000472	Guide And Seal Kit (Steel Cap)
	K001104	Brake Pad Kit (Ferrodo 4550)
Z0017262	K000366	Tappets Kit
	K000472	Guide And Seal Kit (Steel Cap)

Spares kits

Part Number	Kit Number	Description
Z0017262	K001104	Brake Pad Kit (Ferrodo 4550)
Z0017521	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
Z0017522	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
Z0017523	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
Z0017524	II180220062	Brake Pad Kit (Jurid 539FF)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
Z0017671	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0017672	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0017891	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0017892	K000375	Guide And Seal Kit (Steel Cap)
	K000548	Brake Pad Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0017951	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0017952	II180220062	Brake Pad Kit (Jurid 539FF)
	II328090062	Guide And Seal Kit (Rubber Boot)
	II368470064	Rubber Bush Guidance Kit
	II39769F0062	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit

Part Number	Kit Number	Description
Z0017952	K001301	Bellows Cap Kit
Z0021001	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021002	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021021	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021022	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021103	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021104	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021121	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
Z0021122	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodo 4550)
	K001301	Bellows Cap Kit
Z0021124	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021141	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000681	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021142	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000681	Wear Indicator Kit
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021161	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021162	II180220062	Brake Pad Kit (Jurid 539FF)

Spares kits

KNORR-BREMSE

Systems for Commercial Vehicles



Part Number	Kit Number	Description
Z0021162	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021181	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021182	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
Z0021241	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodó 4550)
Z0021242	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001104	Brake Pad Kit (Ferrodó 4550)
Z0021243	K001301	Bellows Cap Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
Z0021244	K001301	Bellows Cap Kit
	II39756F0062	Brake Pad Kit (Textar T7400)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
Z0021261	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
Z0021262	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	II180220062	Brake Pad Kit (Jurid 539FF)
	K000375	Guide And Seal Kit (Steel Cap)
Z0021281	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit
	K000375	Guide And Seal Kit (Steel Cap)
Z0021282	K000375	Guide And Seal Kit (Steel Cap)
	K000944	Tappet & Boot Kit
	K000945	Adjuster Cap Kit
	K001301	Bellows Cap Kit

► **Knorr-Bremse**
Systeme für Nutzfahrzeuge GmbH
Moosacher Straße 80
80809 Munich
Germany
Tel: +49 89 3547-0
Fax: +49 89 3547-2767

► **Knorr-Bremse**
Australia Pty. Ltd.
1/2D Factory Street
PO Box 180
Granville NSW 2142
Australia
Tel: +61 2 8863-6146
Fax: +61 2 8863-6151

► **Knorr-Bremse GmbH**
Systeme für Nutzfahrzeuge
Beethovengasse 43-45
2340 Mödling
Austria
Tel: +43 2236 409-436
Fax: +43 2236 409-434

► **Knorr-Bremse**
Benelux B.V.B.A.
Impulsstraat 11
Industriepark zone D
2220 Heist-op-den-Berg
Belgium
Tel: +32 1525 7900
Fax: +32 1524 9240

► **Knorr-Bremse**
Sistemas para Veículos Comerciais Brasil Ltda.
Av. Engenheiro Eusébio Stevaux, 873
Jurubatuba
São Paulo – SP
Cep: 04696-902
Brazil
Tel: +55 11 5681 1104
Fax: +55 11 5686 3905

► **Knorr-Bremse Far East Ltd.**
Truck Brake Systems Division
1301 MassMutual Tower
38 Gloucester Road
Wanchai
Hong Kong
China
Tel: +852 2861 2669
Fax: +852 2520 6259

► **Knorr-Bremse Brake Equipment (Shanghai) Co. Ltd.**
Truck Brake Division
Section C, Building 9
353 Riyang North Road
Waigaoqiao Free Trade Zone, 200131
Shanghai
China
Tel: +86 21 5046-0776
Fax: +86 21 5046-3427

► **Knorr-Bremse**
Systémy pro užitková vozidla, ČR, s.r.o.
Petra Bezruč 399
463 62 Hejnice
Czech Republic
Tel: +420 482 363-611
Fax: +420 482 363-711

► **Knorr-Bremse**
Systèmes pour Véhicules Utilitaires France S.A.
BP 34178
RN 13, La Briqueterie
Glos
14104 Lisieux Cedex
France
Tel: +33 2 3132 1200
Fax: +33 2 3132 1303

► **Knorr-Bremse**
Fékkendszerek Kft.
Kecskemét
Szegedi út 49
6000
Hungary
Tel: +36 76 511 100
Fax: +36 76 481 100

► **Knorr-Bremse**
Systems for Commercial Vehicles India Private Ltd.
404-405 HM Geneva House
Cunningham Road
Bangalore 560 052
India
Tel: +91 80 20 88-273
Fax: +91 80 51199068

► **Knorr-Bremse**
Sistemi per Autoveicoli Commerciali S.p.A.
Via C. Battisti, 68
20043 Arcore
Italy
Tel: +39 039 6075-1
Fax: +39 039 6075-435

► **Knorr-Bremse**
Commercial Vehicle Systems Japan Ltd.
3-1-15, Nishiikebukuro
Toshimaku-
Tokyo 171-0021
Japan
Tel: +81 3 3971-8501
Fax: +81 3 3971-8579

► **Knorr-Bremse Korea Ltd.**
6 FL, Bongwo B/D, 31-7, 1-Ga
Jangchung-Dong, Jung-Gu
100-391 Seoul
Korea
Tel: +82 2 2273-1182
Fax: +82 2 2273-1184

► **Knorr-Bremse**
Benelux B.V.B.A.
Rendementsweg 4N
3641 SK Mydrecht
Netherlands
Tel: +31 297 239-330
Fax: +31 297 239-339

► **Knorr-Bremse**
Systeme für Nutzfahrzeuge GmbH
Representation Office Russia
1. Kasatschij Pereulok 5/2
119017 Moscow
Russian Federation
Tel: +7 095 234-4995
Fax: +7 095 234-4996

► **Knorr-Bremse S.A. Pty. Ltd.**
3 Derrick Road
(corner Chestnut Road)
1610 Kempton Park
South Africa
Tel: +27 11 961-7800
Fax: +27 11 975-8249

► **Knorr-Bremse**
System for Tunga Fordon AB
P.O. Box 6029
200 11 Malmö
Sweden
Tel: +46 40 680 5880
Fax: +46 40 937490

► **Knorr-Bremse**
Systeme für Nutzfahrzeuge GmbH
Office Switzerland
Zürichstraße 46
8303 Bassersdorf
Switzerland
Tel: +41 1 888 77-55
Fax: +41 1 888 77-50

► **Knorr-Bremse**
Systeme für Nutzfahrzeuge GmbH
Liaison Office Istanbul
Meclisi Mebusan Cad. 139/A
Atlantik Han Kat: 3
80040 Findikli - Istanbul
Turkey
Tel: +90 212 293-4742
Fax: +90 212 293-4743

► **Knorr-Bremse**
Systems for Commercial Vehicles Ltd.
Douglas Road
Kingswood
Bristol
BS15 8NL
United Kingdom
Tel: +44 117 9846-100
Fax: +44 117 9846-101

► **Bendix Commercial Vehicle Systems LLC**
901 Cleveland Street
Elyria, OH 44035
USA
Tel: +1 440 329-9000
Fax: +1 440 329-9203



KNORR-BREMSE
Systems for Commercial Vehicles

www.knorr-bremse.com

www.knorr-bremsesfn.com