
Studio SOP

This is the standard operating procedure for a **photography studio** using Instant Memories, from the first login to delivering the album photos. Send it to every studio you sign up. It is written for them, so "you" means the studio.

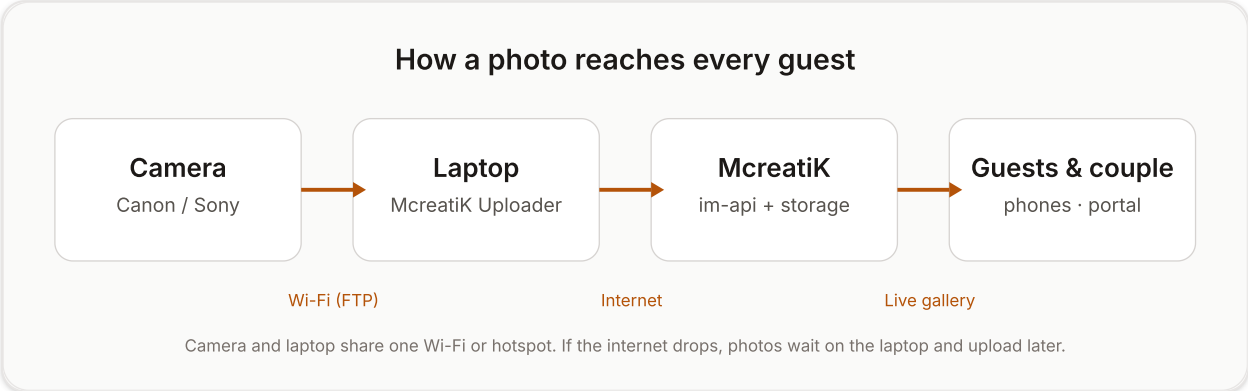

How a photo reaches every guest: camera, laptop uploader, McreatiK, guests and the couple


---

The whole job on one page

WHEN	WHAT YOU DO	SECTION
Once	Log in, set your own password, add your logo and Instagram	1–2
Per event, a few days before	Create the event, connect each camera, print the QR poster	3–5
Event day	Start the uploader, test one shot, put the posters out	6
During the event	Watch the dashboard; hide anything that shouldn't be shown	7
After the event	Upload full-quality finals to the Client gallery, give the couple their login, collect album picks	8–9
Any time	See who loved and asked for photos	10


1. First login

1. Open **live.mcreatik.com/admin**, then sign in with the email and temporary password McreatiK sent you. The page checks the email and password as you fill them in.

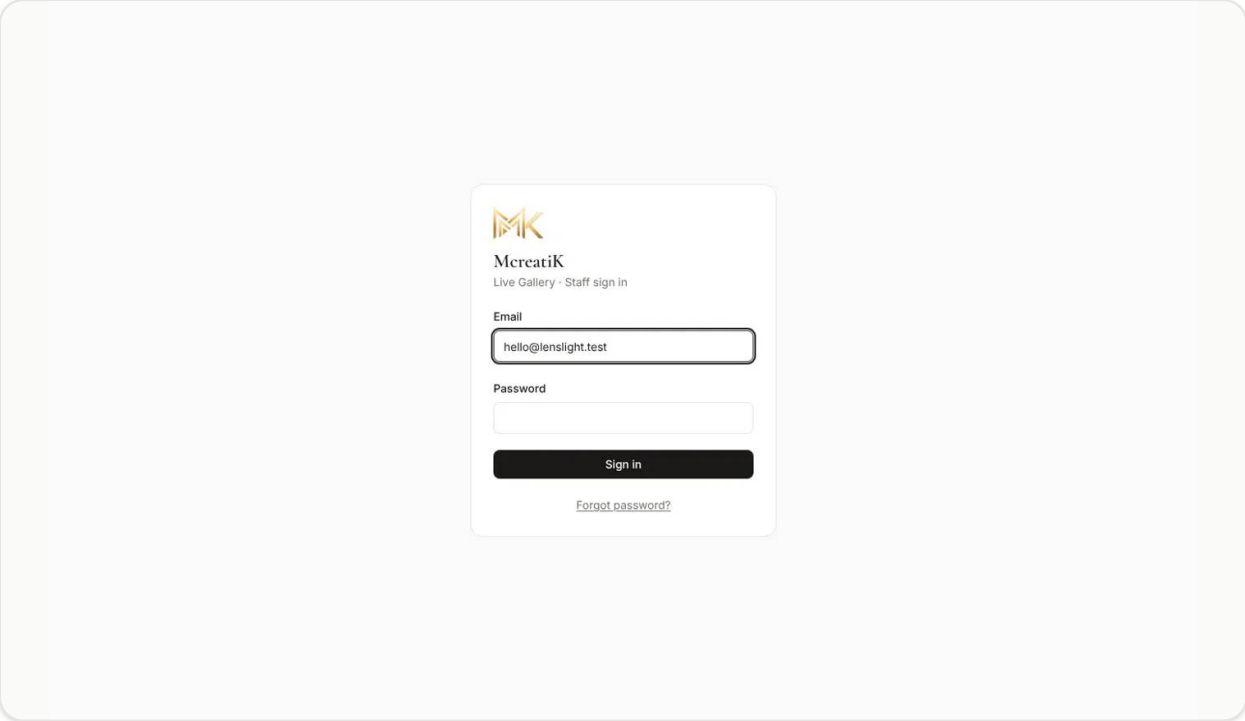

Staff sign-in page

1. You're asked to choose your own password straight away (at least 10 characters). Enter the temporary password once, then the new one twice, and press **Save password**.

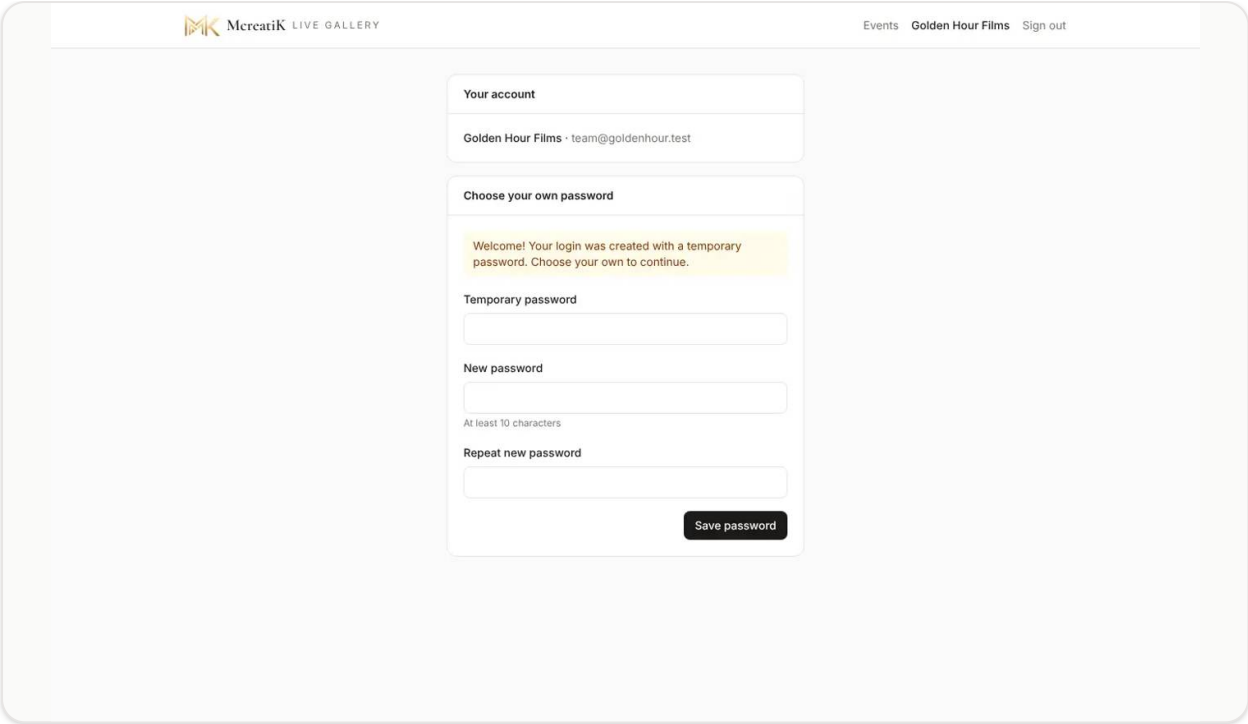

First login: choose your own password

> **Tip** Forgot it later? Press **Forgot password?** on the sign-in page. A temporary password arrives by email from **connect@mcreatik.com** and works for 30 minutes.

---


2. Your branding

Open your studio name at the top right (**Account**).

1. **Logo:** press **Change logo**. A PNG with a transparent background looks best.
2. **Logo size on the QR poster:** drag until the preview looks right.
3. **Studio name** and **Instagram** (without the @). Under the studio name you see that guests get to see it on your galleries, QR posters and printed cards.
4. **Contact number (WhatsApp):** your booking number, for example 98765 43210 (+91 is added for you). It is checked as you type. Then press **Save**, or **Cancel** to undo your changes.

The preview follows the board design you pick.

Guests see your name, logo and Instagram on the gallery and on the printed QR poster. With a contact number, the gallery also shows a **"Book ... for your event"** bar right under the live bar, with **WhatsApp** and **Call** buttons, and the number is printed on your studio board and A4 poster. Every guest at the event is a possible client: **Guests → Contacted you** counts how many tapped it. Leave the number empty to hide it.

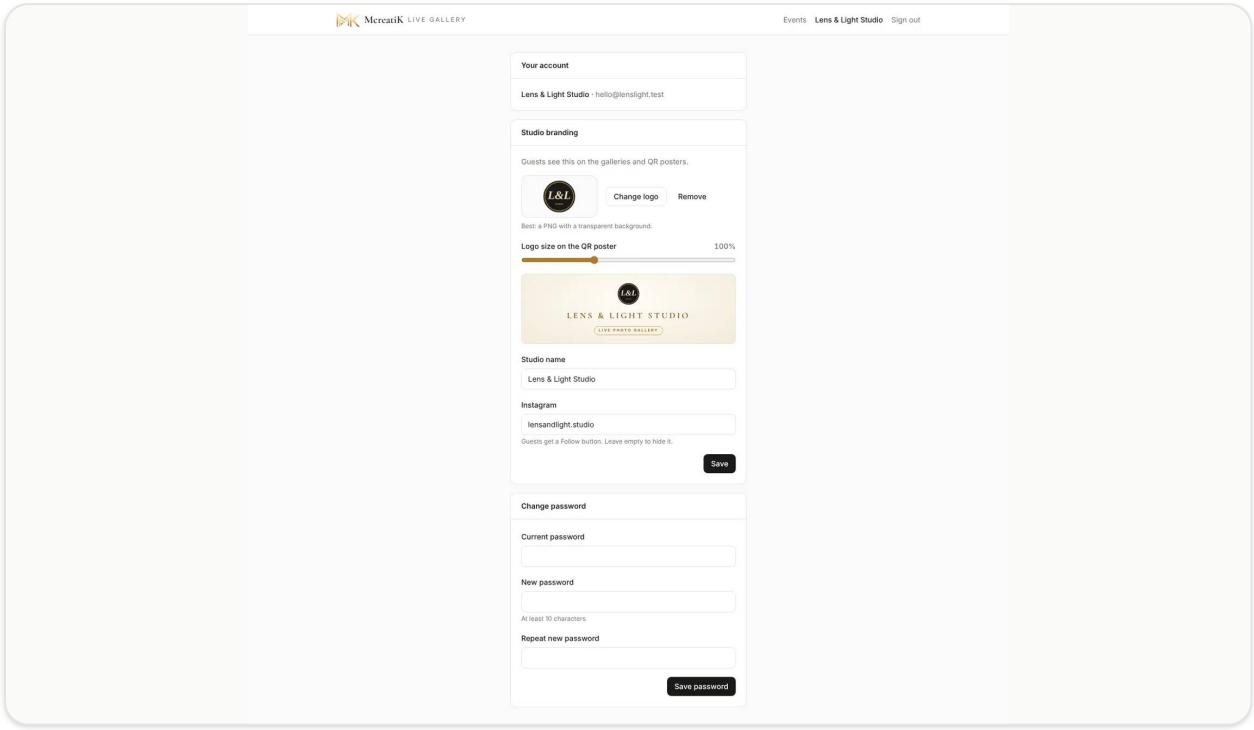


Account page: logo, poster logo size, studio name, Instagram and password

---

3. Create an event

1. **Events** shows all your events and, at the top, your plan: events left this month, any carried over from last month, and events you've bought.
    - Use **Sort** and the filters (type, status, year, month, from and to date) to find an event fast.

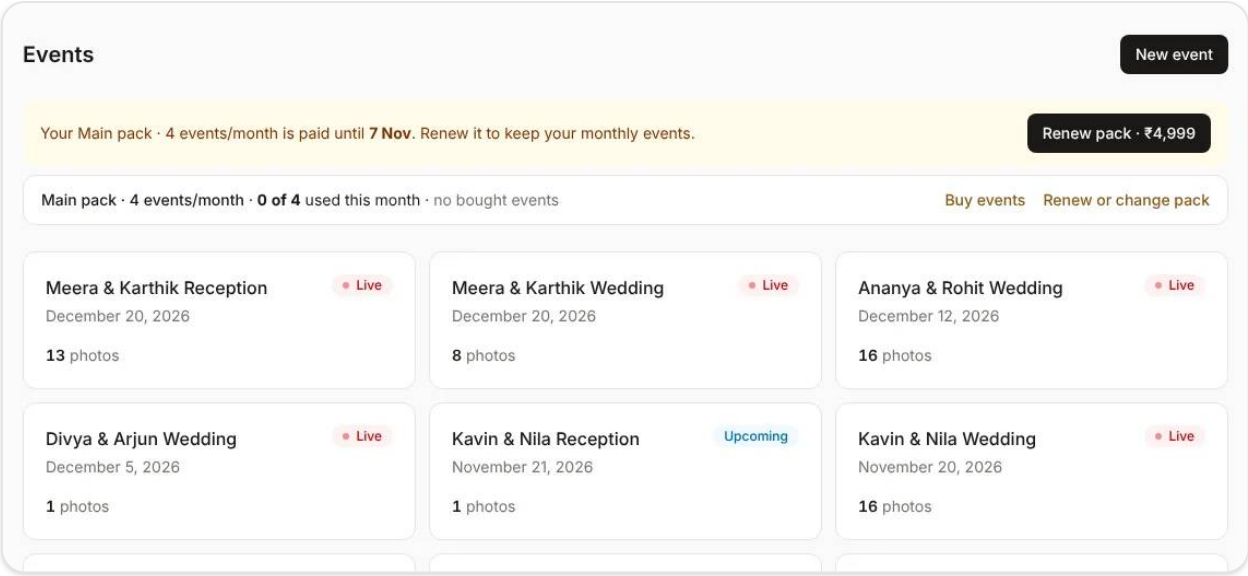

Events list with the monthly allowance

1. Press **New event** and choose the **Event type**:

   - **Main event:** weddings, receptions, big birthdays, big traditional functions and large corporate events.
   - **Quick event:** engagements, small birthdays, baby showers and small corporate events, up to about 200 guests. If more guests turn up, the gallery keeps working and the event page offers **Upgrade to Main**.
   - **Client gallery only:** no live guest gallery and no camera. You upload the edited photos from the dashboard and the couple gets a private gallery to view, select and download. ₹250 per client gallery, plus storage for the months you choose (see 3.1).


   Under the choice, the form tells you how this event is paid for: by your pack, by an event you bought, or the price to pay.

2. Enter the **Event name** guests will see (for example "Rahul & Sneha Engagement"), the **Date** and the **Status** (Upcoming for future events).

3. **Gallery open for:** how many months the gallery stays open. Main and Quick events include 3 months. Each extra month costs ₹75. You pay for it right after creating the event, in the **Change storage & months** window. A client gallery starts at 1 month, and its price is the setup plus the storage for those months.

4. **Gallery address** is optional. Leave it empty and you get a hard-to-guess address.

5. Press **Create event**.

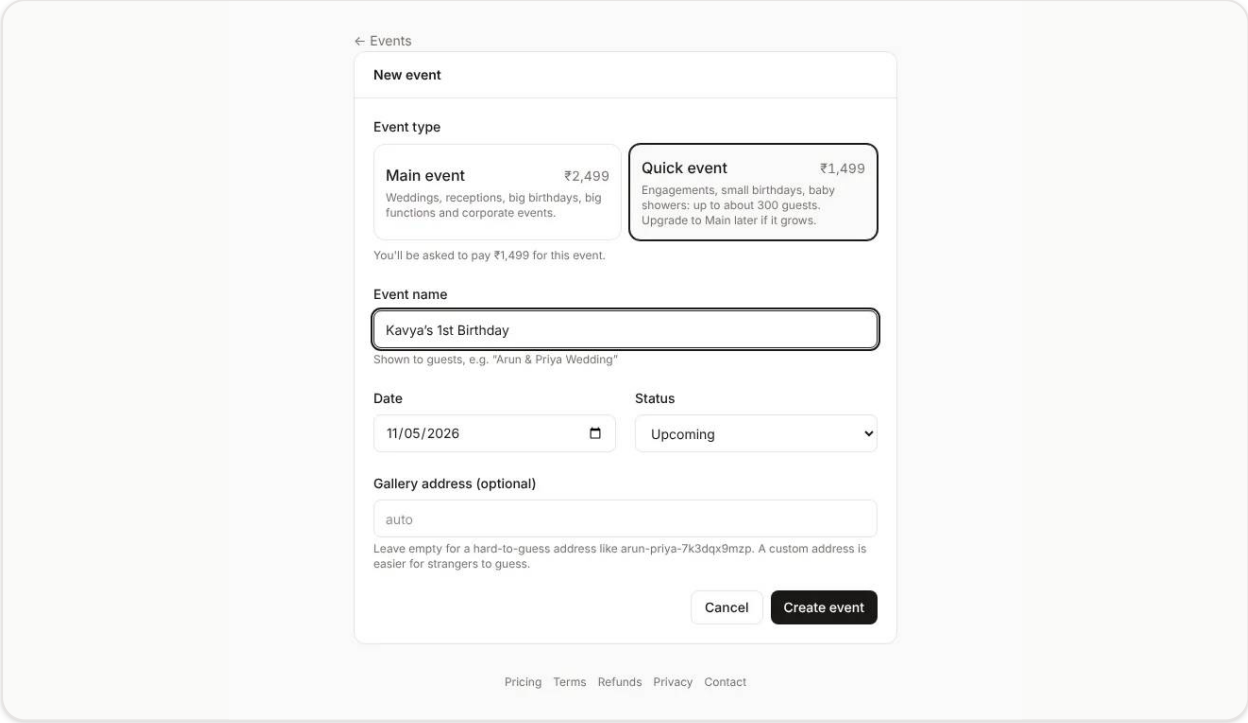

New event form

Packages and prices

	ONE EVENT	2 EVENTS A MONTH	4 EVENTS A MONTH
Main	₹2,499	₹3,499	₹4,999
Quick	₹1,499	₹2,499	₹3,999
Extra event on a Main pack (Main or Quick)		₹1,499	₹999
Extra Quick event on a Quick pack		₹999	₹799

- **Monthly packs:** a Main pack also covers Quick events; a Quick pack covers Quick events only.
- **Extra events:** once this month's pack events (and any carried over) are used, each extra event costs the pack's extra price above, as long as the pack is paid up. **Buy events** and the new-event form show it. A Main event on a Quick

pack is the normal ₹2,499. If the pack lapses, events go back to the normal prices.

- **Carry-over:** unused events carry over to the next month (one month only).
- **Renewing:** packs are renewed month by month from **Events → Renew pack** (you get an email and a banner a few days before). If you don't renew, nothing stops: new events are charged one by one.
- **Upgrades:** a Quick event that grows past about 200 guests can be upgraded to Main for ₹1,000.
- **Bought events** never expire.
- **Main event on a Quick pack:** while your Quick pack is paid up, a Main event costs ₹1,499 instead of ₹2,499.
- **Check the event name and date before creating an event.** They are printed on your QR cards and can't be changed afterwards (contact McreatiK if you made a mistake). Studios can't delete events; you can delete photos. Only McreatiK can delete an event.
- **Client gallery storage:** when you pay the ₹250 setup, you pay for the gallery's storage and months in the same payment.

3.1 Storage and how long galleries stay open

	PRICE
Client gallery only	₹250 setup per gallery + storage, for 1 month unless you choose more
Storage	₹15 per GB per month (1 GB ≈ 80 full-quality photos)
Main or Quick event	5 GB for 3 months included free; extra storage starts at 5 GB (5, 10, 25, 50 or your own number), ₹15 per GB per month
Change storage & months	One button: add GB, add months, or both. You see one total and make one UPI payment
One more month on a Main or Quick event	5 GB × ₹15 = ₹75


- **What counts:** everything stored for the event, both the gallery versions and the full-quality originals. A typical wedding of 2,000 photos with originals is about 25 GB.
- **Event page → Overview → Gallery & storage** shows what the event uses, how many more photos fit, and when it closes. **Change storage & months** is the one button for more space or more time. Choose the GB to add (5, 10, 25, 50 or your own number, at least 5), the months to add, or both.
- **Client galleries** start with 0 GB. Choose the storage when you create it; when it is full, uploads stop with "storage is full" until you add more.
- **Main and Quick events** are never stopped during the event. If the event uses more than 5 GB, add the extra GB within **14 days of the event date**. If you don't, the couple's gallery is paused (the guests' gallery keeps working) until you add it.
- **Main and Quick galleries are open 3 months (about 90 days)** from the event date. A client gallery is open for the months you chose, 1 by default, from the day it was created. After that, guests and the couple see "This gallery has expired", and the photos are **deleted for good 30 days later**. The event stays in your list as a record (archived). Studios can't delete events; only McreatiK can. We email you 14 days before and on the day.
- **More months:** use **Change storage & months** on the same card. You can use it as many times as you need, any time until the deletion date.
- **How it is charged:** the GB you add are charged for the months the gallery has left (rounded up to whole months), plus all the gallery's GB for the months you add, at ₹15 per GB per month. The free 5 GB for 3 months is never charged. A client gallery has no free storage: you choose its months when you create it (setup + GB × ₹15 × months).
- **Selling it on:** you decide what to charge your couple for the digital gallery. For example, a 25 GB wedding gallery for 3 months is ₹250 + 25 × ₹15 × 3 = ₹1,375 to you (for 1 month it is ₹625), so you could charge your couple ₹2,500 or more for a private online album. Uploading only the edited finals (not every original) keeps the GB, and your cost, down.

Current prices are always on the pricing page.

Need more events?

Press **Buy events**, choose **Main** or **Quick** and how many. **Monthly packs** (or **Renew or change pack**) opens the same window for a pack. Then pay:

Pay with the **UPI QR**: scan it with GPay, PhonePe, Paytm or any UPI app (on a phone, tap **Pay with UPI app**), then type the **UTR** (the UPI transaction ID in your app) and press **I have paid**. The events are ready **at once**; McreatiK confirms the payment within a day. Bought events never expire. If a payment is not received, it is taken back and we contact you (see **Refunds** at the foot of the dashboard).

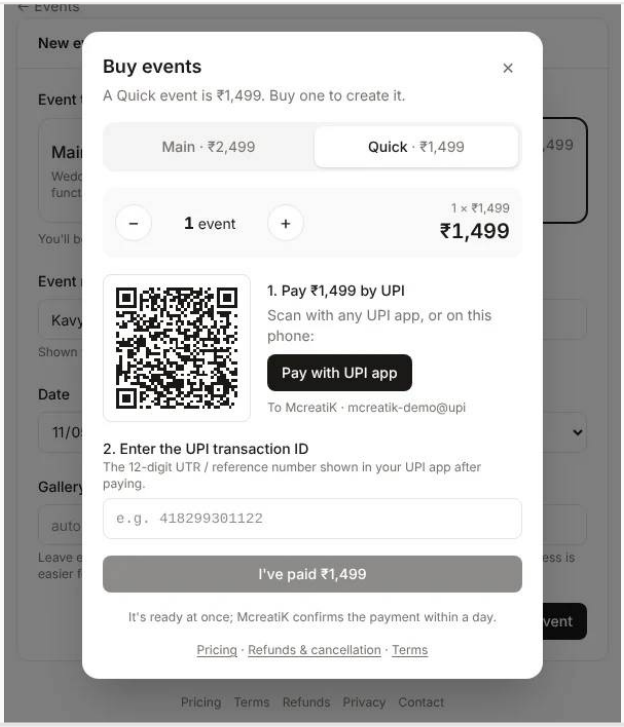

Buy events: pay by UPI QR

---

4. Connect your cameras

Setting up a new laptop? Press **Install uploader** in the top bar of the dashboard and download the Windows or Mac version.


Every camera needs its own **uploader**. One laptop with the McreatiK Instant Memories Uploader app can serve up to 4 cameras: add the extra cameras in the app with **+ Add camera** (you name each one there), and each appears here by itself. On the laptop, each event gets one folder with a sub-folder per camera.

1. Open the event. On **Overview**, under **Cameras & uploaders**, type a name such as "Camera 1 · Canon R6 II" and press **Add camera & get code**.

2. A **connection code** appears. **It's shown only once**, so press **Copy code** and paste it into the uploader (see the **Uploader guide**). The code is all the uploader needs. There is no studio sign-in in the app.


   After installing, in short (full steps in the **Uploader guide**):

   - **First open:** Windows → More info → Run anyway; Mac → System Settings → Privacy & Security → Open Anyway.
   - **Connect:** in the uploader press **Paste**, choose the photo folder, choose camera Wi-Fi (FTP) or folder, then **Connect**.
   - **Camera Wi-Fi:** type the Server, Port, User and Password shown on the Live page into the camera's FTP settings, then take a test shot and check it appears.
   - **Change to another event:** wait until everything is uploaded (the queue is empty), then **Events → Change event...**, paste the new event's code and press **Connect**. The uploader restarts on the new event (**Switching to another event**).

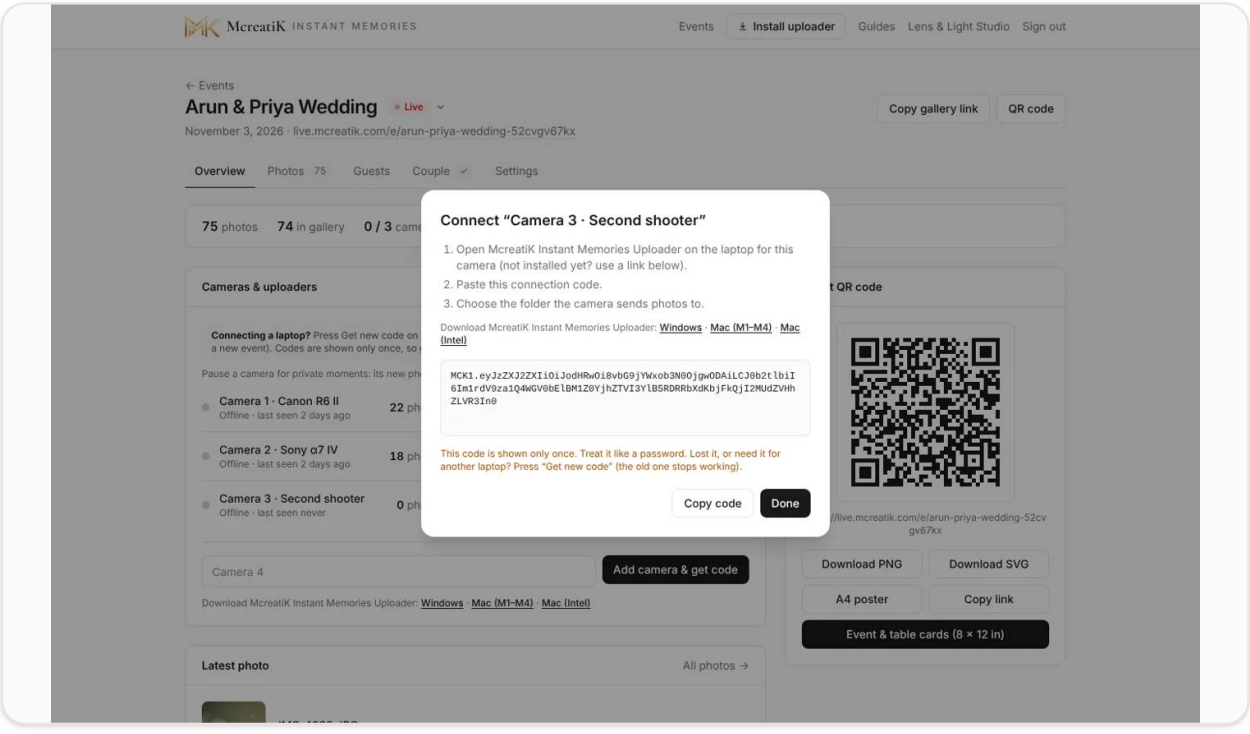


Add camera & get code: the one-time connection code

1. When the uploader is running, the camera shows **Online** with a green dot and its photo count.

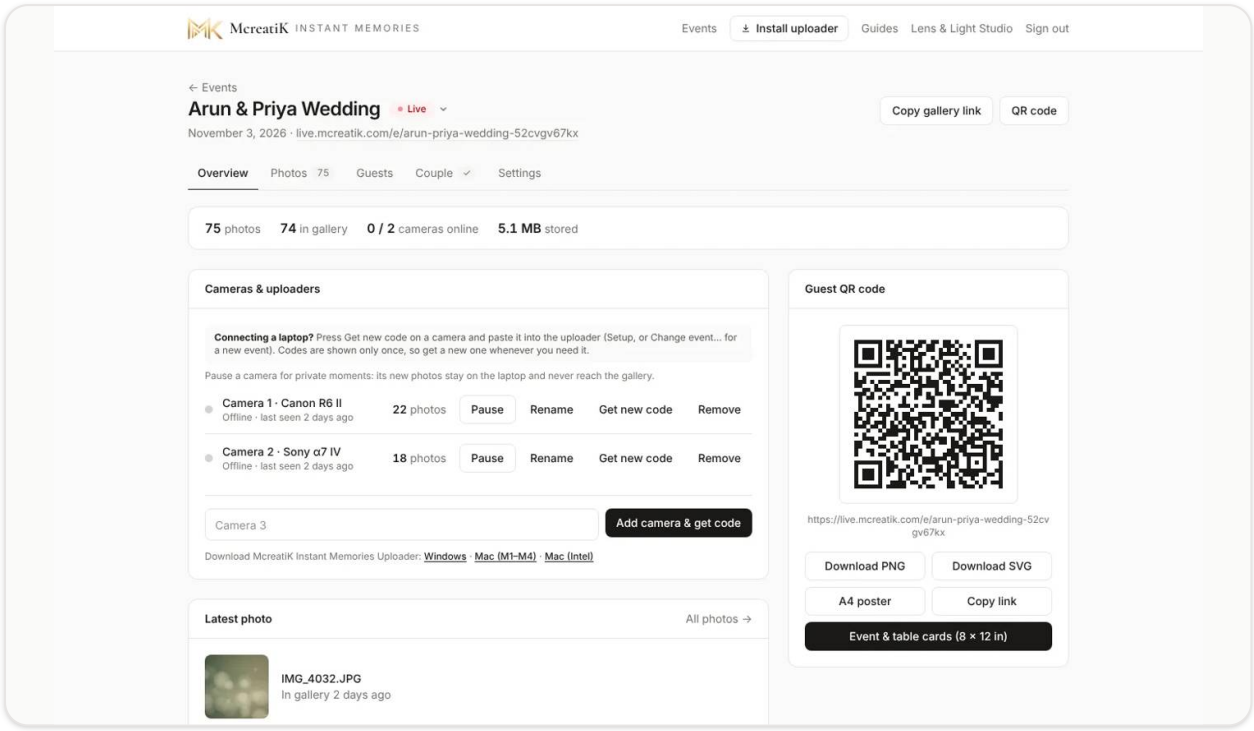

Overview: photo counts, cameras online, latest photo, QR code

- **Pause / Resume:** a privacy pause for moments that shouldn't go live (for example the bride getting ready). While paused, that camera's photos stay on the laptop and **never** reach the gallery, even after you resume. The camera shows **Paused** in amber here and in the uploader. You can also pause it in the uploader.

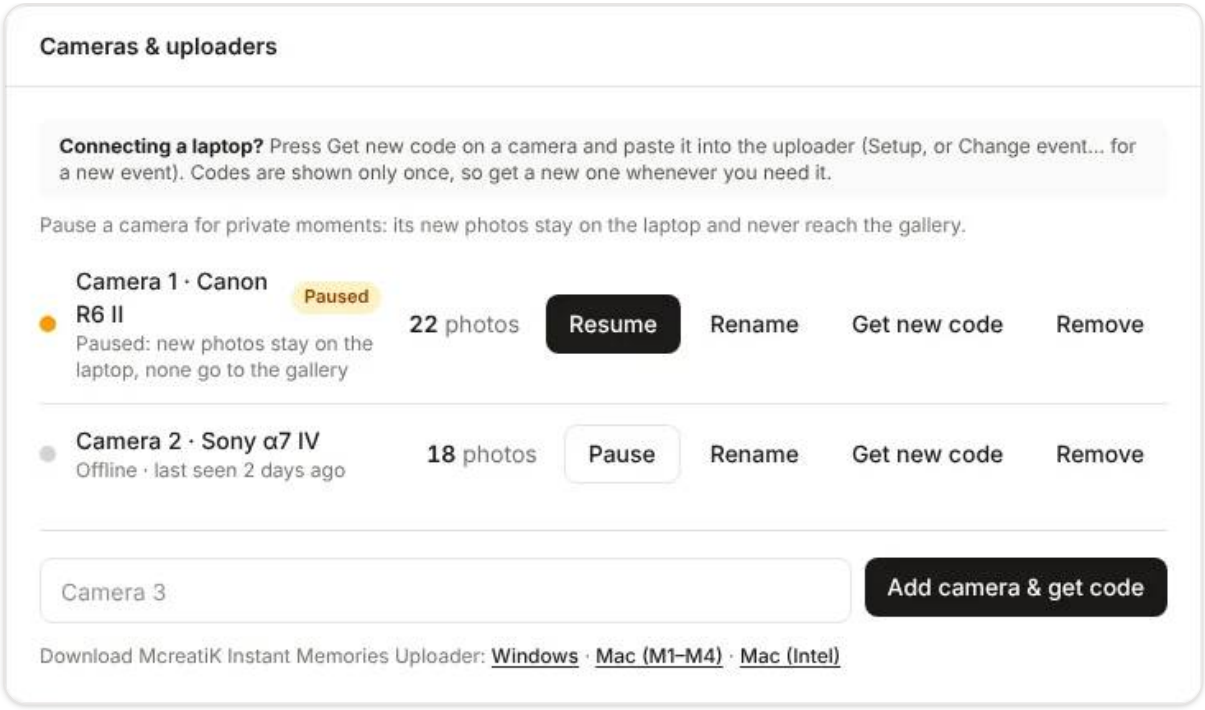


Cameras: one paused for a private moment

- **Rename:** for example "Main - Karthik" or "Candid - Divya". The name shows here, in the uploader and on its photo folder.
- **Get new code:** the code is shown only once, so use this whenever you need it again: a lost code, a new laptop, or an event you set up earlier and are moving the laptop to now. The old code stops working.
- **Freelancers and second shooters:** add a camera for each person, then send them the code on WhatsApp together with the uploader download link (**Install uploader** in the top bar). They need nothing else. When their job is done, press **Get new code**. Their old code stops working, so they can no longer send photos to the event.
- **Remove:** disconnects that camera.

Then set up the camera itself (any camera with FTP transfer (Wi-Fi/FTP upload) works; examples): Canon EOS R6 Mark II · Sony α7 IV.

5. QR code, studio board and cards

Print your studio board once. Go to **Account → Studio board** and pick a design: **Cream**, **Dark** or **White**. Then press **Download board (18 × 24 in)**. The board has your logo, studio name and Instagram, "Every moment, live." and a frame for the event card. It has no event details, so you can reuse it at every event. Have it printed on foam board or sunboard.

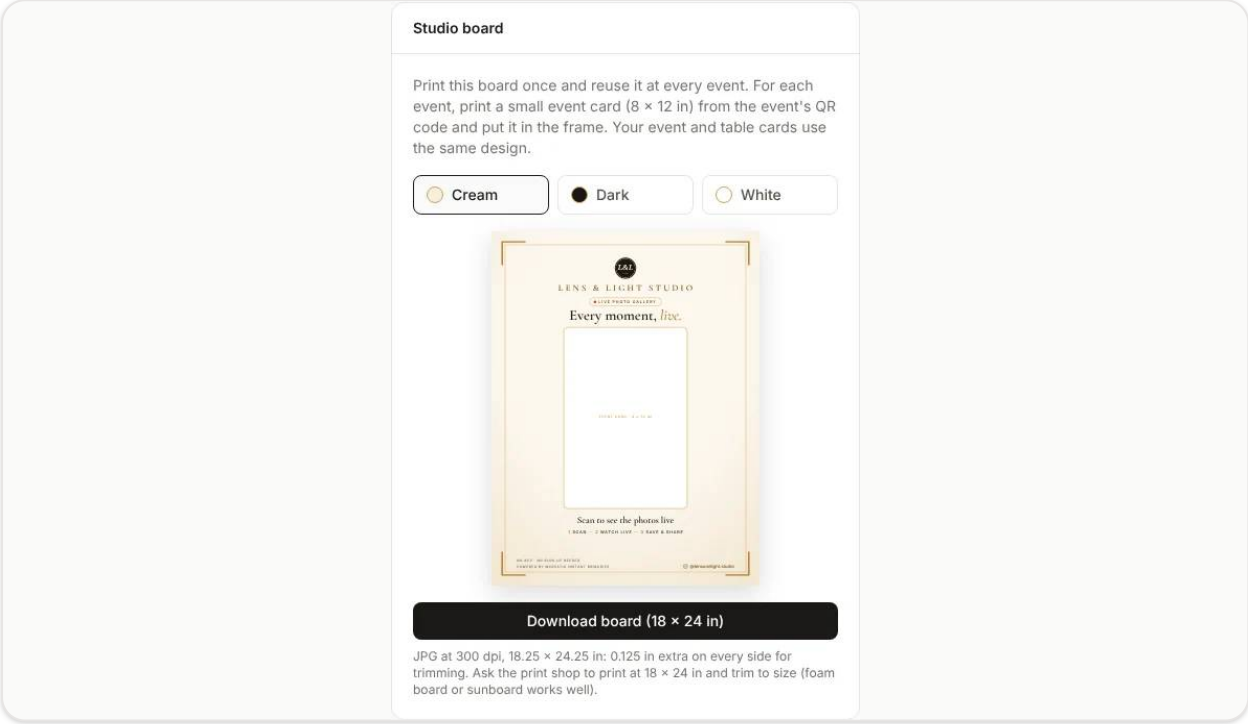


Account → Studio board: pick the design and download the board

For each event, print the cards. On the event's Overview, the **Guest QR code** card gives you:


- **Event & table cards (8 × 12 in):** opens the cards page.
  - The **event card** (the couple's names, the date and the QR code) goes in your board's frame.
  - The **table card** adds "Scan to see the photos live", so it can stand on its own on guest tables.

  Both use your board's design. 8 × 12 in is a standard photo print size, so your photo lab can print them.

- **Download PNG / SVG:** the QR code alone, for invitations, screens or your own designs.
- **A4 poster:** the classic one-page poster, for an office printer.
- **Copy link:** to share in WhatsApp groups.
- The A4 poster reads "McreatiK Instant Memories" and also downloads as a **300 dpi JPG** on the cards page, for a print shop.

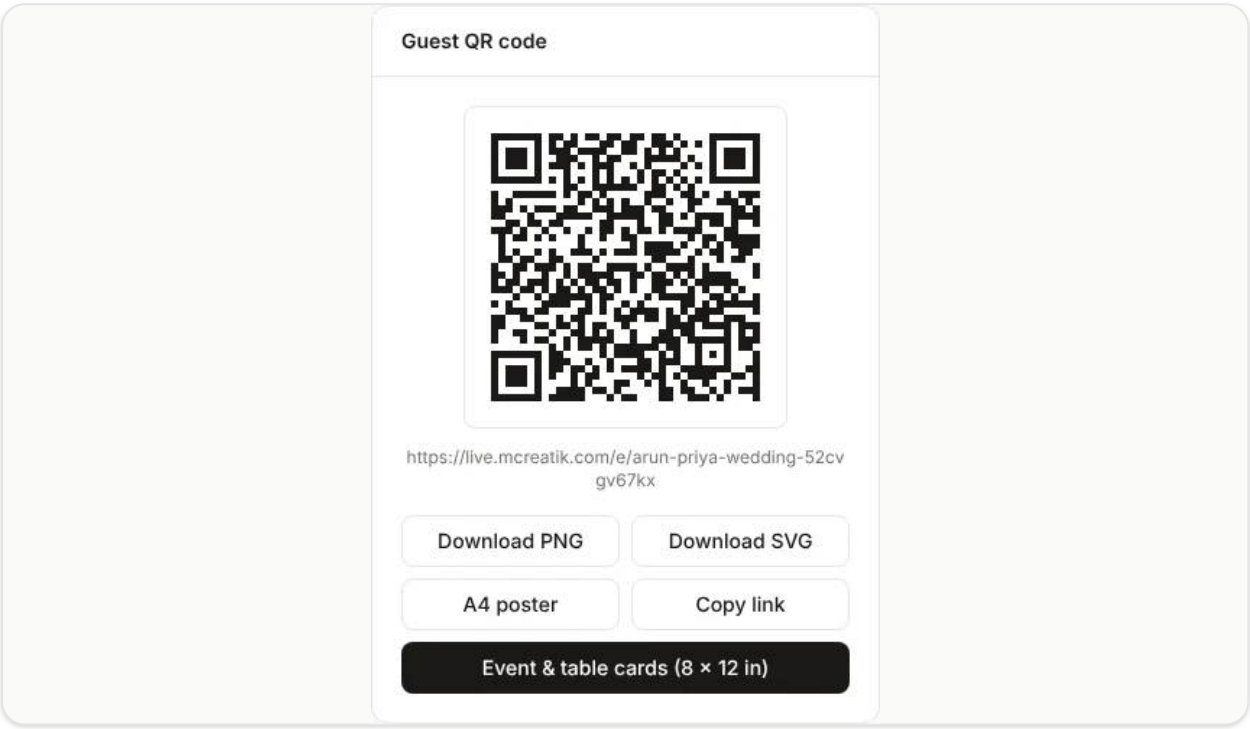

Guest QR code card

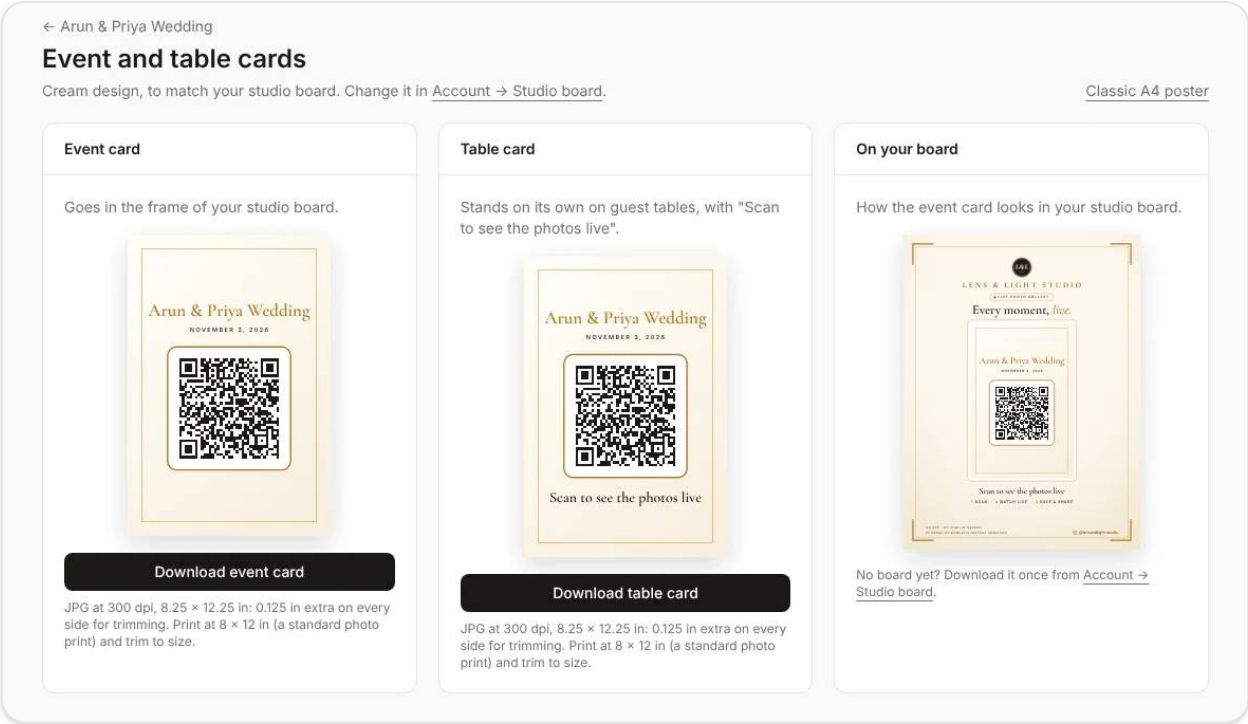

Event and table cards for one event, and how the event card looks in the board


The board and cards are JPG files at 300 dpi, with 0.125 in extra on every side for trimming: the board file is 18.25 × 24.25 in and the cards are 8.25 × 12.25 in. Ask the printer to **print at 18 × 24 in (or 8 × 12 in) and trim to size**. All text is kept well inside the edges, so a slightly off cut won't touch it.

> **Tip** Put the board at the entrance and a table card on every few tables. That's where most guests scan.

---

6. Event day

1. Set the event to **Live**, or leave it Upcoming: it turns Live by itself with the first camera photo. Use the status menu next to the event name.

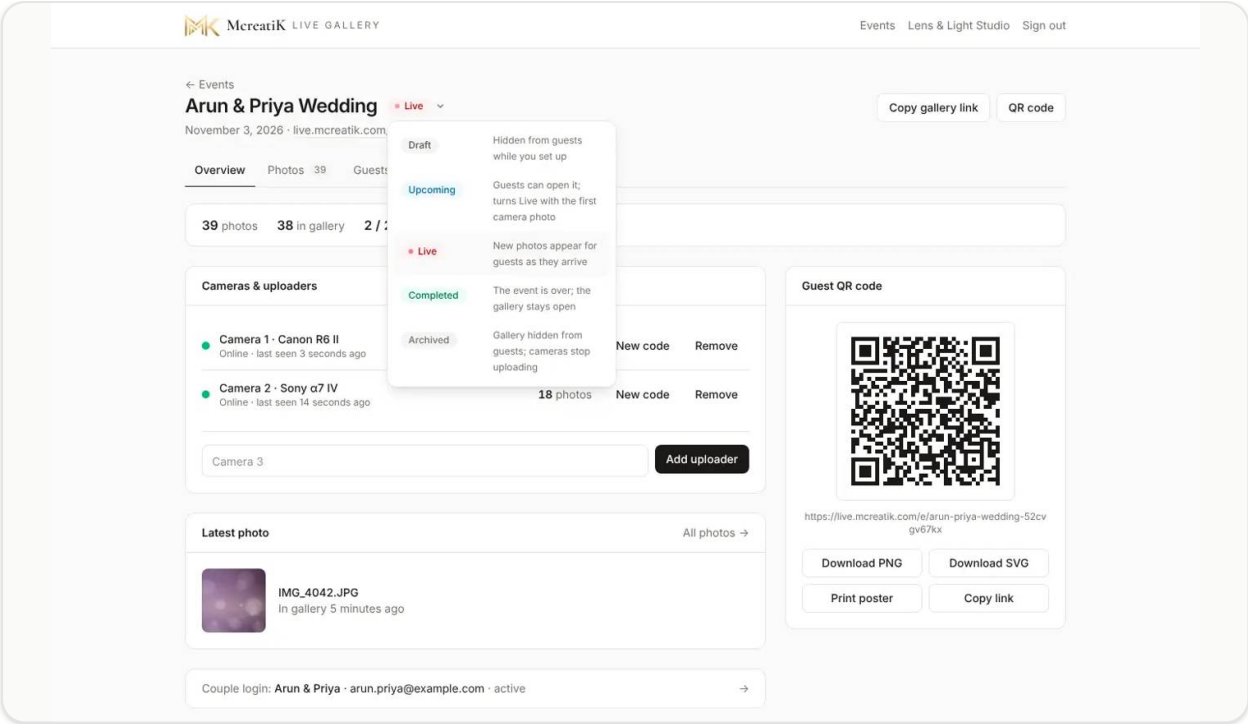

Event status menu: Draft, Upcoming, Live, Completed, Archived


1. Start the uploader on each laptop and check it shows **Online** and **this event's name** (see the Uploader guide).
2. Take one test shot per camera. It should appear in the gallery within seconds.
3. Put the QR posters out.
4. Follow the Event-day checklist.

---

7. During the event: curate live


Open **Photos**. Every photo the cameras send appears here and in the guest gallery.

At the top of **Photos** you see two tabs: **Guest gallery** and **Client gallery**. During the event you work in **Guest gallery**. The camera photos land there.

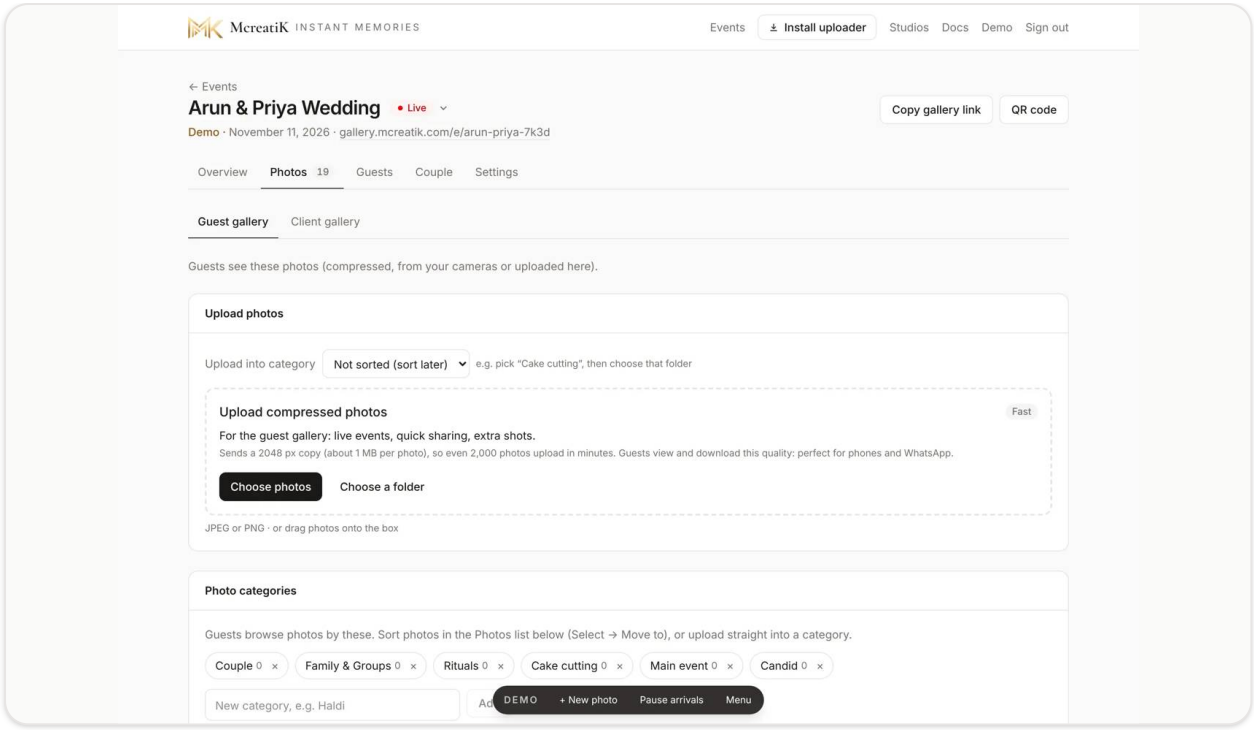

Photos tab, Guest gallery: the photos guests see

- **Filters:** camera, liked or hidden, day, category, and newest or oldest first.
- **Find one photo:** type the camera file name, for example IMG_1234.JPG, in the **Search file name** box.
- **On each tile:** the heart marks a **Like** (your favourites; filter by them later); the eye **hides** it from guests at once.
- **More (···):** Download, **Make cover** (the gallery's top image), Download original, Delete.
- **Select:** tap several photos, then Move to category, Like, Hide, Download (.zip) or Delete them all at once. **Select all** and **Clear** help with big batches.

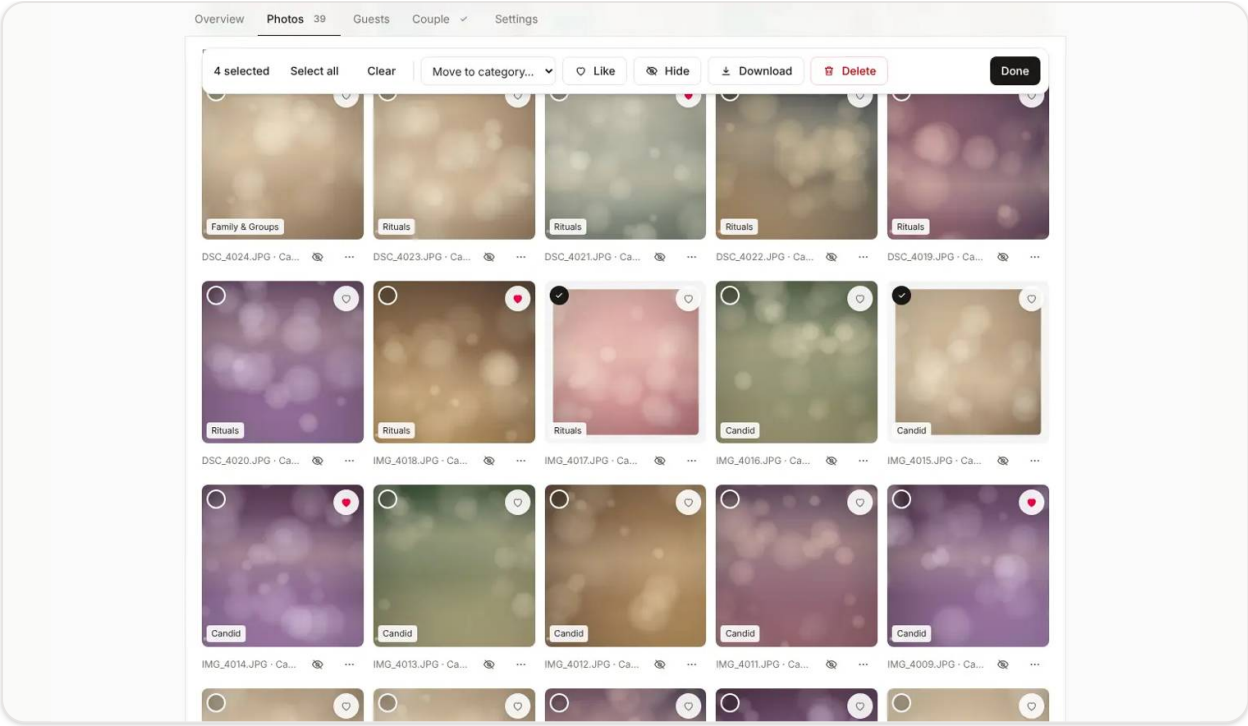

Select mode with four photos picked and the bulk action bar

> **Warning** Delete is permanent. Prefer **Hide** during the event; delete afterwards if needed.

Guest gallery and Client gallery

	GUEST GALLERY	CLIENT GALLERY
What is in it	Camera photos and compressed uploads	Full-quality photos you upload from the dashboard: your edited finals
Who sees it	Only the guests	Only the couple
What the couple does with it	Nothing. They don't see it.	Views it, picks album photos, downloads photos and ZIPs

- Each tab has its **own categories**. Add them under **Settings → Photo categories**, one list for each tab.
- If a gallery is turned off, uploads are still saved. Nobody sees them until you turn it on.
- A **Client gallery only** event shows just the Client gallery tab.

- **Old events:** on events created before 11 Nov 2026, the couple still sees every photo, as before. There is no split.


> **Tip** Guests get compressed photos. Your client gets full quality in the Client gallery.

---

8. After the event

8.1 Upload the couple's final photos

Open the **Client gallery** tab and upload your edited, full-quality photos there. Choose a category first if the batch belongs to one (for example "Cake cutting"), then **Choose photos** or **Choose a folder**.

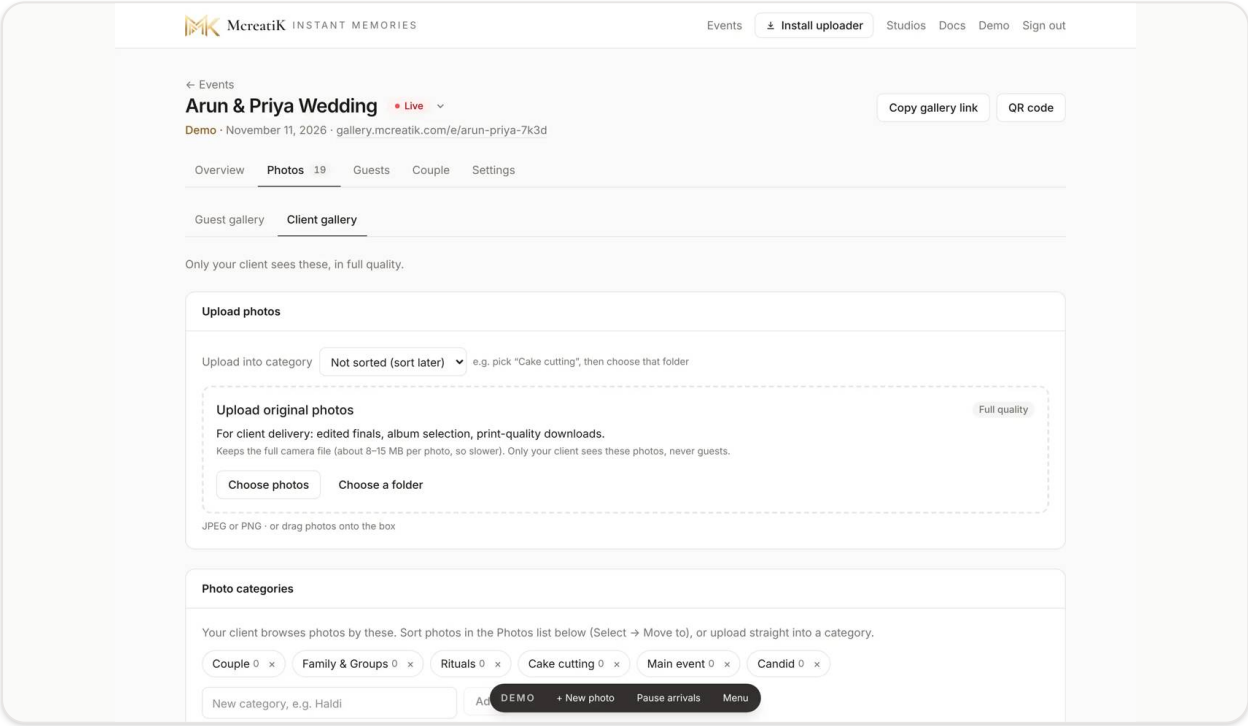


Photos tab, Client gallery: full-quality finals for the couple

- Photos you upload here go **only to the couple**. Guests never see them.
- They stay full quality. The couple can download them as they are.
- To add more photos for guests after the event, use the **Guest gallery** tab. Those are compressed (2048 px, about 1 MB each) so they upload fast.

- If a photo is in the wrong tab, you'll see a message. Open the other tab and upload it there.

8.2 Sort into categories

Settings → Photo categories lists the albums people browse by (Couple, Family & Groups, Rituals, Cake cutting, Main event, Candid). Guest gallery and Client gallery each have their own list. Add your own, or remove one with ×. To sort photos: **Photos → Select → Move to category**.

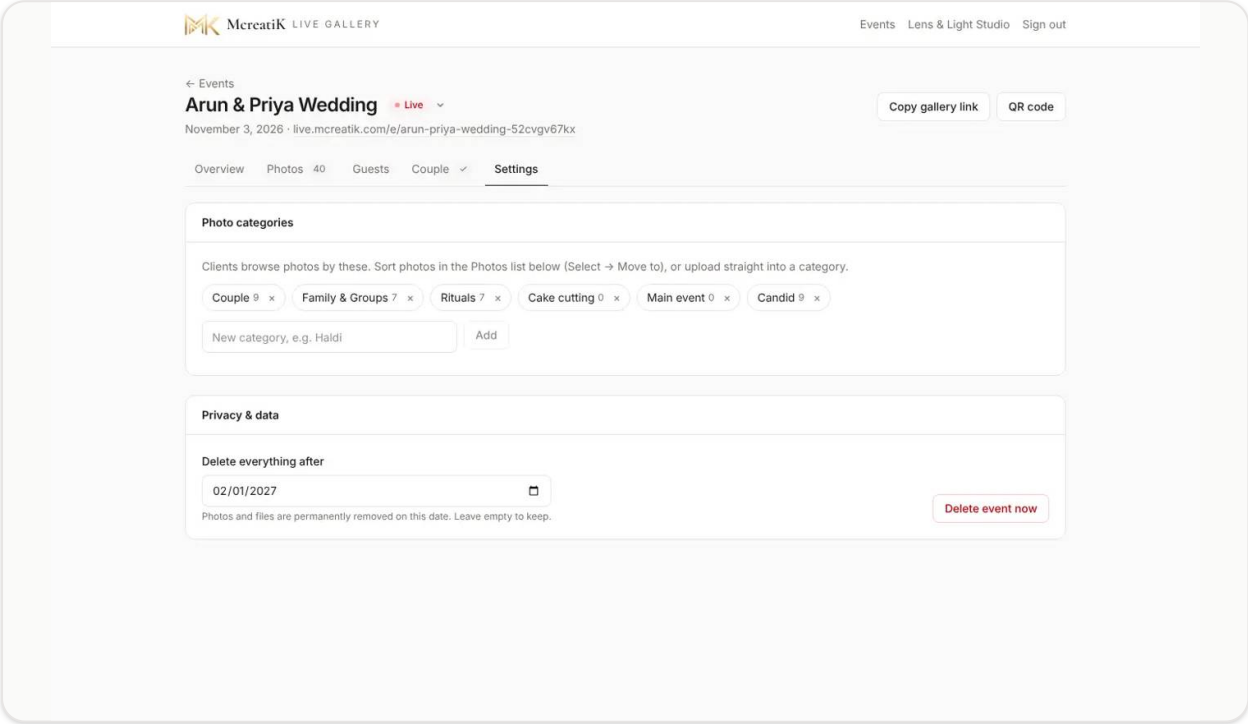


Settings: photo categories and delete date

8.3 How long it stays open

Settings → Privacy & data shows when the gallery closes and when its photos are deleted permanently (30 days later). To keep it longer, use **Change storage & months** on the Overview's **Gallery & storage** card (see 3.1). Tell the couple the date so they download in time.

9. Give the couple their login

1. Open **Couple** and press **Create client login**: name, email and phone (for WhatsApp).
2. Send it with **WhatsApp** or **Open in mail app**. The message carries the couple's gallery link. The temporary password is shown only now.
3. **Album limit (optional):** for example 60. The couple can't pick more than this.
4. Their picks appear under **Album selection** as they choose. Press **Download all (.zip)** for your album designer, or use **Copy file names** or **Download list (.txt)** to find them in Lightroom.

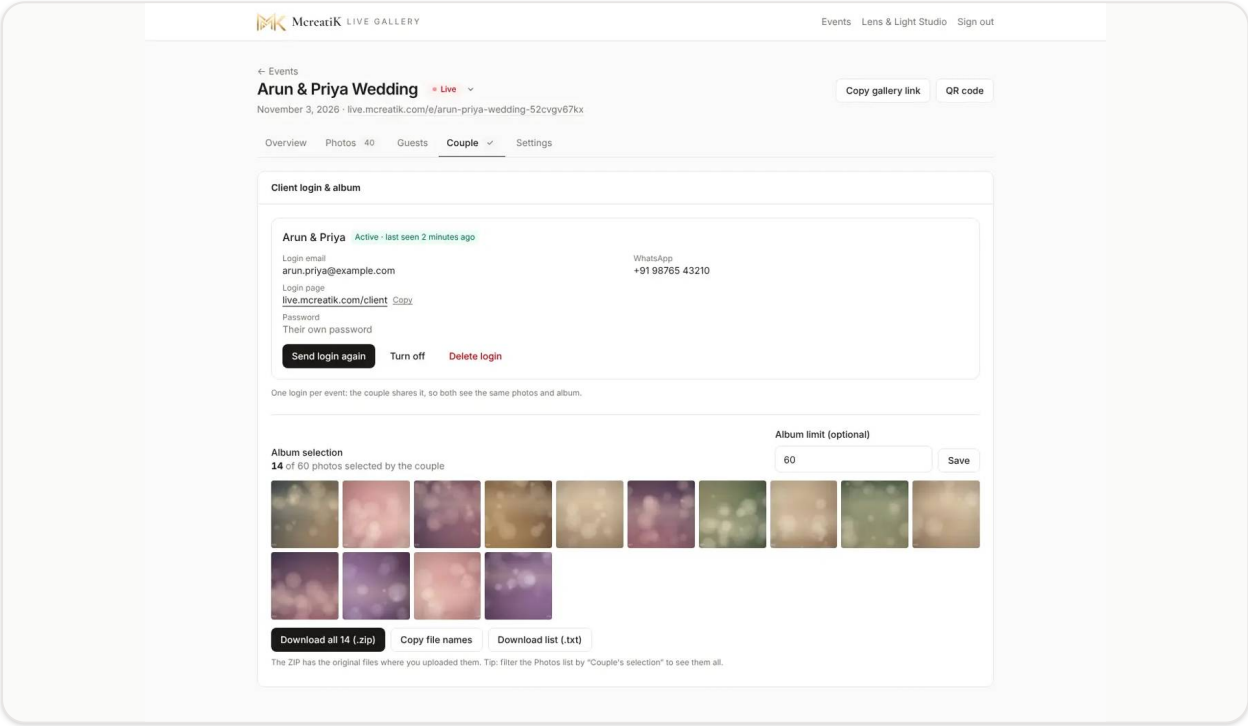

Couple tab: client login, album limit and the couple's picks

- **Same email, several events:** the same couple email can have a login on several events. The link is live.mcreatik.com/client/login?event=your-event-address. If they use the plain login page, they choose the event after signing in. A password reset covers all their logins.
- **Send login again:** resends the login with a new temporary password.
- **Turn off:** blocks the couple's login without deleting anything.
- **Delete login:** removes it. Their picks are kept with the event.


Then send them the couple guide: **Guides → Couples (clients) → Download PDF** (see Guides for your clients).

---

10. See how guests used it

Guests shows people, QR scans, gallery visits, photo views and downloads, an hourly chart and **Likes**: how many hearts guests tapped. Guests stay anonymous. Use it in your marketing ("312 guests watched live").

- **Lists: Most loved**, **Most downloaded** and **Most viewed** show which photos guests liked, saved and opened most.
- **HD photo requests:** a guest can tap **Get HD photo** and leave an email or a WhatsApp number. Each request shows here with a **WhatsApp** or **email** link, so you can reply in one tap. Send the photo, then tick **Done**. Every request is a possible booking.
- **Removal requests:** a guest who asks to remove a photo sends an email that names the camera file, for example IMG_1234.JPG. Open **Photos**, type that name in **Search file name**, and hide or delete the photo.

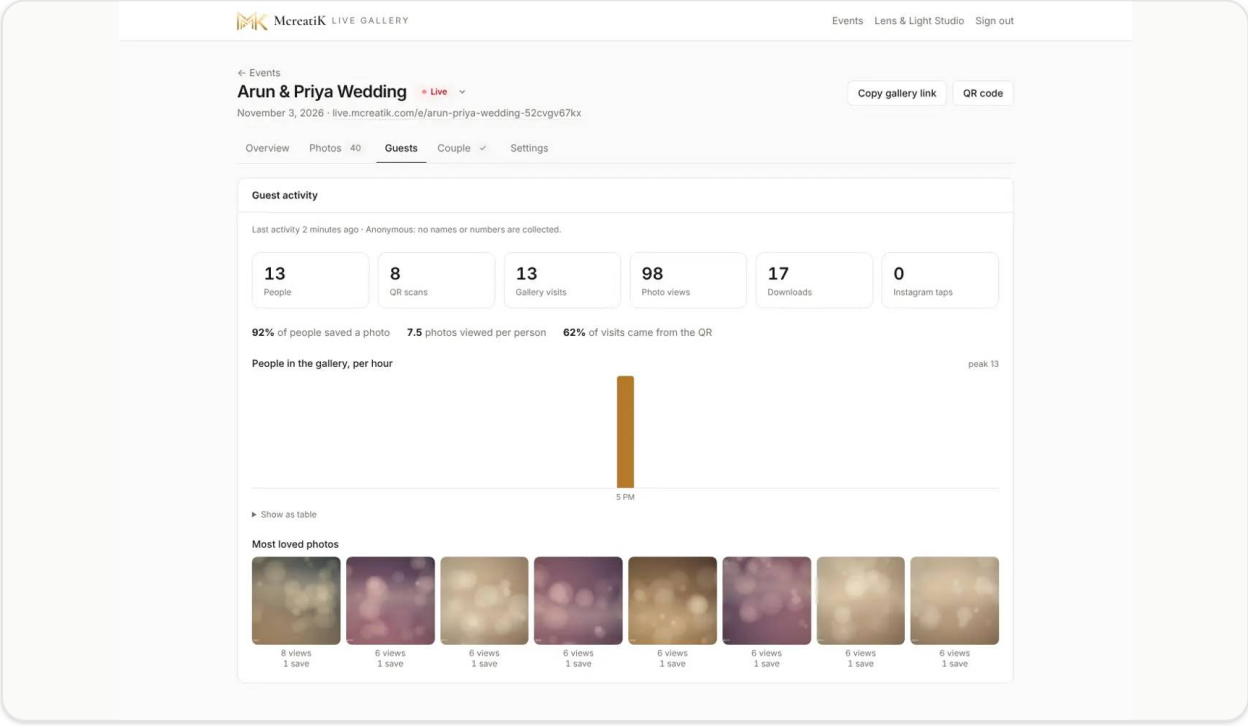

Guests tab: guest activity, hourly chart and most-loved photos

11. Guides for you and your clients


Guides in the top menu has every guide for you, plus guides to send your clients. Each page has a **Download PDF** button: choose **Save as PDF** in the print window. The PDF always matches the current app.

SEND THIS	TO	WHEN
Couples (clients)	The couple	With their login (step 9)
Guests	The event planner or family	A few days before the event
Couples Q&A and **Guests Q&A**	Anyone with questions	Any time

The client guides show **your studio's name, logo and Instagram** (set in **Account**, step 2), with a small "Live photos by McreatiK Instant Memories" line at the end. Send the PDF on WhatsApp or email: your clients don't need a login to read it.

The client guides send couples and guests to **you** for help, never to McreatiK. If you can't solve something (a login that won't work, a gallery that is switched off, a bug), contact McreatiK and we sort it out with you. The one exception: a guest who asks to have their own photo removed can also email McreatiK. We pass it to you, as privacy law requires.

Table card text you can copy: "**Scan to see the photos live.** Point your phone camera at the code. No app needed. New photos appear on their own."

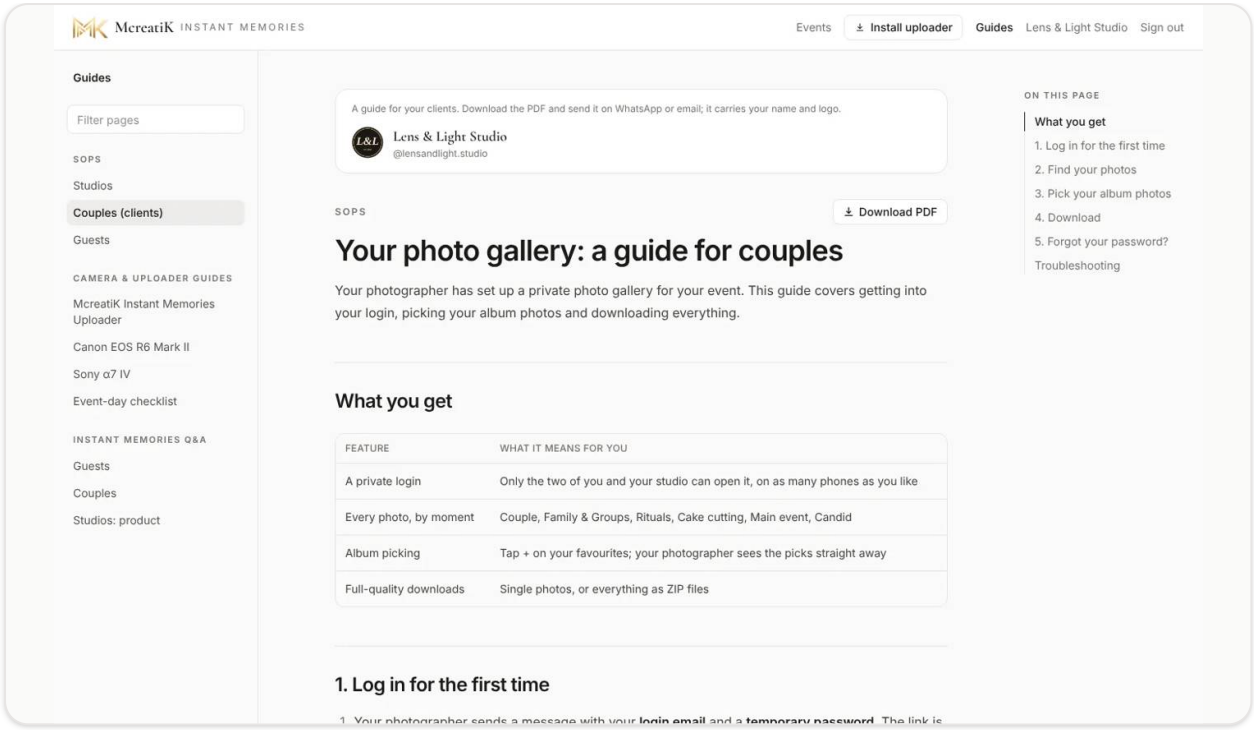

Guides: the couple guide with your studio's name and logo, and the Download PDF button

Troubleshooting


PROBLEM	FIX
A camera shows Offline on the dashboard	The uploader on that laptop is closed, asleep or has no internet. Check its window.
The uploader shows an earlier event's name	Press **Change event...** in the uploader and paste this event's code.
The camera can't connect to the laptop	See the camera guide's troubleshooting (**Canon** · **Sony**).
Couple says photos are missing	New events: the couple sees only the **Client gallery**. Upload the finals there.
Guests say the page is empty	Status is Draft or Archived, or no photos yet. Set Upcoming or Live.
"This gallery is currently unavailable"	McreatiK turned the gallery off. Contact McreatiK.
Upload says "storage is full"	A client gallery has used its GB. Press **Change storage & months** (Overview → Gallery & storage), then **Retry failed**.
Couple says "This gallery has expired"	Its 3 months have passed. Press **Change storage & months** on the Overview before the deletion date shown there.
Can't create an event (payment needed)	Your pack's events are used up, your pack has ended (renew it), or it's a Main event on a Quick pack. The message says which. Use **Buy events** or **Renew pack**.
Couple says the album limit is reached	Raise the **Album limit** on the Couple tab, or ask them to untick some.

More: Event-day checklist and troubleshooting.

McreatiK Instant Memories Uploader

The **McreatiK Instant Memories Uploader** runs on a laptop at the venue. It receives each photo from the camera over Wi-Fi (or from a folder), makes a light, sharp copy, and uploads it to the live gallery. If the internet drops, photos wait safely on the laptop and upload by themselves later.

The current version is **1.0.22**. Connect it with the connection code from the event dashboard. There is no studio sign-in. Freelancers need only the code and the download link.

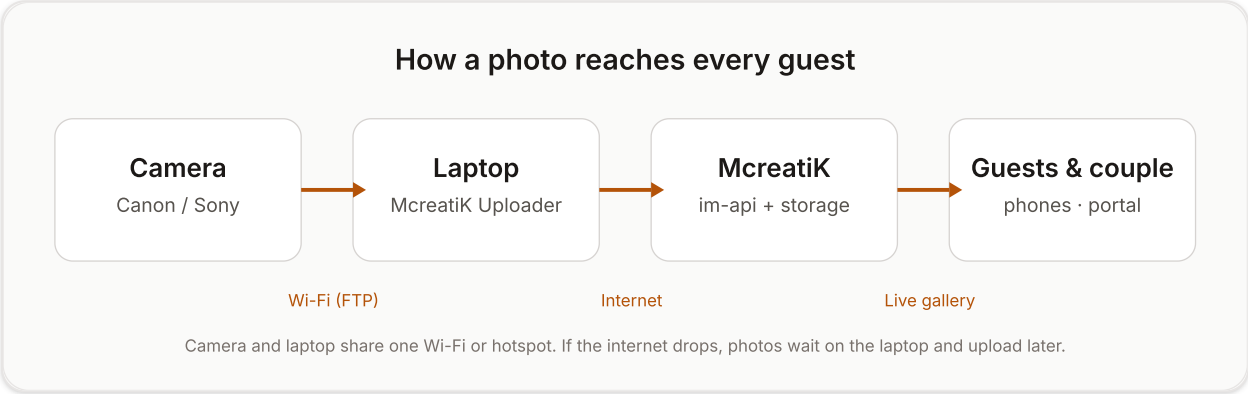


How a photo reaches every guest

	WINDOWS	MAC
Install	`McreatiK-Instant-Memories-Uploader-Windows.msi`	`McreatiK-Instant-Memories-Uploader-Mac-AppleSilicon.dmg` (M1–M4) or `…-Mac-Intel.dmg`
Needs	Nothing else: Java is included	Nothing else: Java is included; macOS 12+

One laptop can serve **up to 4 cameras** at the same time (section 7).

1. Download and install (once)

In the dashboard, press **Install uploader** in the top bar (on a phone: **Menu → Install uploader**). It shows the Windows and Mac downloads, with this computer's first, and the first-open steps:

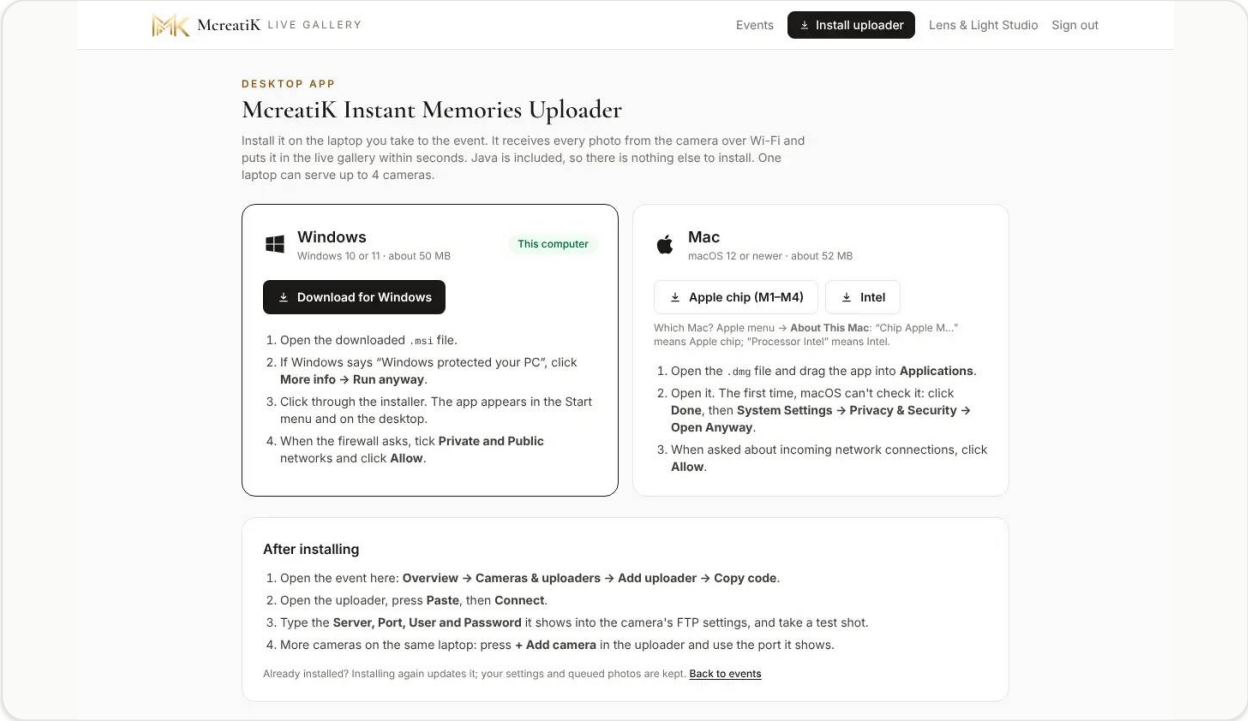

Install uploader in the top bar: Windows and Mac downloads

Or use these links:

LAPTOP	DOWNLOAD
Windows	McreatiK-Instant-Memories-Uploader-Windows.msi
Mac with Apple chip (M1–M4)	McreatiK-Instant-Memories-Uploader-Mac-AppleSilicon.dmg
Older Mac (Intel)	McreatiK-Instant-Memories-Uploader-Mac-Intel.dmg

Not sure which Mac you have? Apple menu → **About This Mac**: "Chip Apple M..." means Apple chip; "Processor Intel" means Intel.

Windows

1. Open the `.msi` file. Windows may show "Windows protected your PC" (the app isn't code-signed yet): click **More info → Run anyway**.
2. Click through the installer. **McreatiK Instant Memories Uploader** appears in the Start menu and on the desktop.

Mac


1. Open the `.dmg` file and drag **McreatiK Instant Memories Uploader** into **Applications**.
2. Open it from Applications. The first time, macOS says it can't check the app (not code-signed yet): click **Done**, then go to **System Settings → Privacy & Security**, scroll down to McreatiK Instant Memories Uploader and click **Open Anyway**.
3. The app keeps the Mac awake by itself while it runs.

---

2. Start and connect to the event


Start **McreatiK Instant Memories Uploader** from the Start menu (Windows) or Applications (Mac).

The first time, the **Setup** window opens:

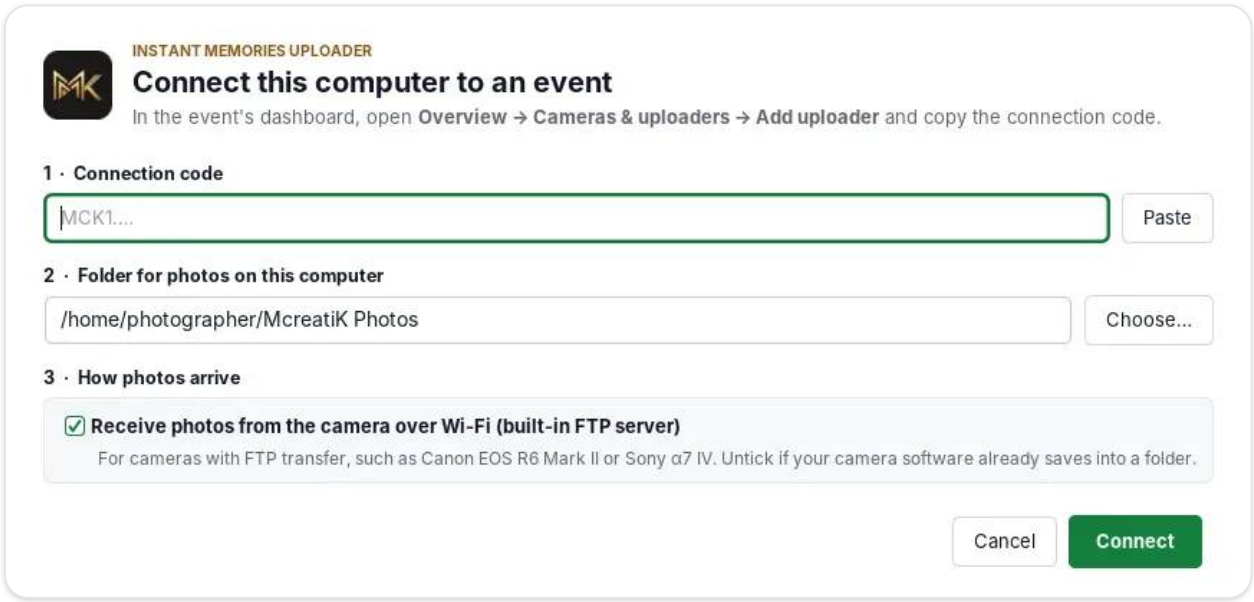


Uploader setup window

1. **Connection code:** the code is all the app asks for. There is no studio sign-in. Copy the code from the event dashboard (Overview → Cameras & uploaders → **Add camera & get code** → **Copy code**; for a camera you already added, **Get new code**), then press **Paste**.
2. **Folder for photos on this computer:** the default "McreatiK Photos" in your home folder is fine.
3. **How photos arrive:** keep **"Receive photos from the camera over Wi-Fi"** ticked for any camera with FTP transfer (Wi-Fi/FTP upload). Untick it only if your camera software already saves into a folder.
4. Press **Connect**. If something is wrong, the reason appears in red under the form:

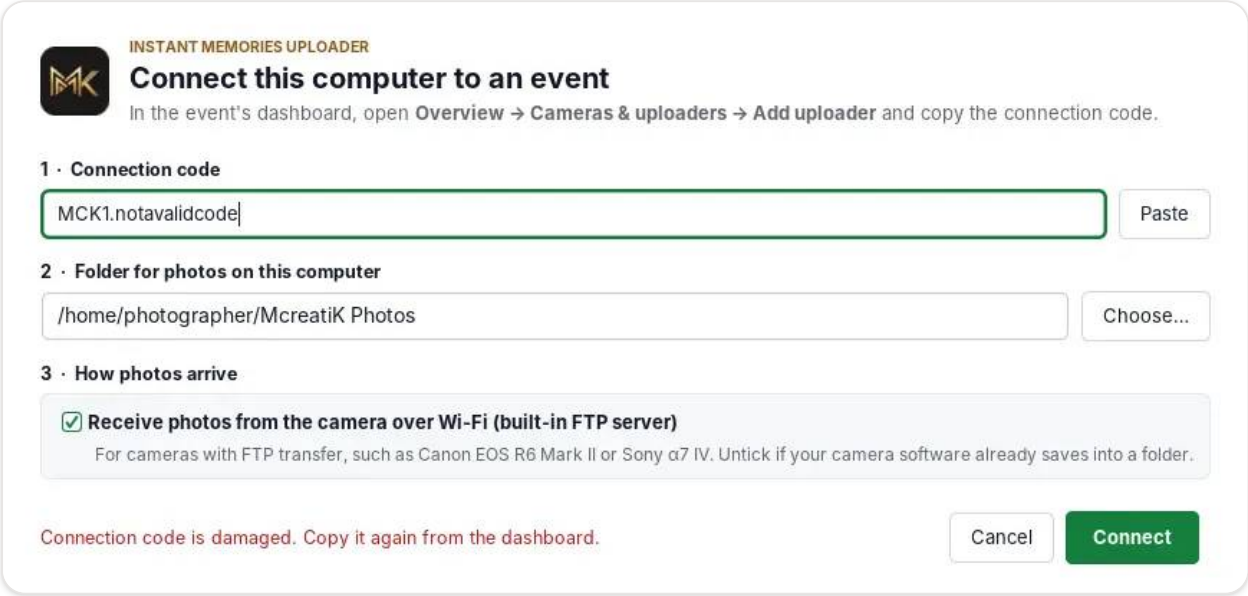

A damaged connection code is explained in red

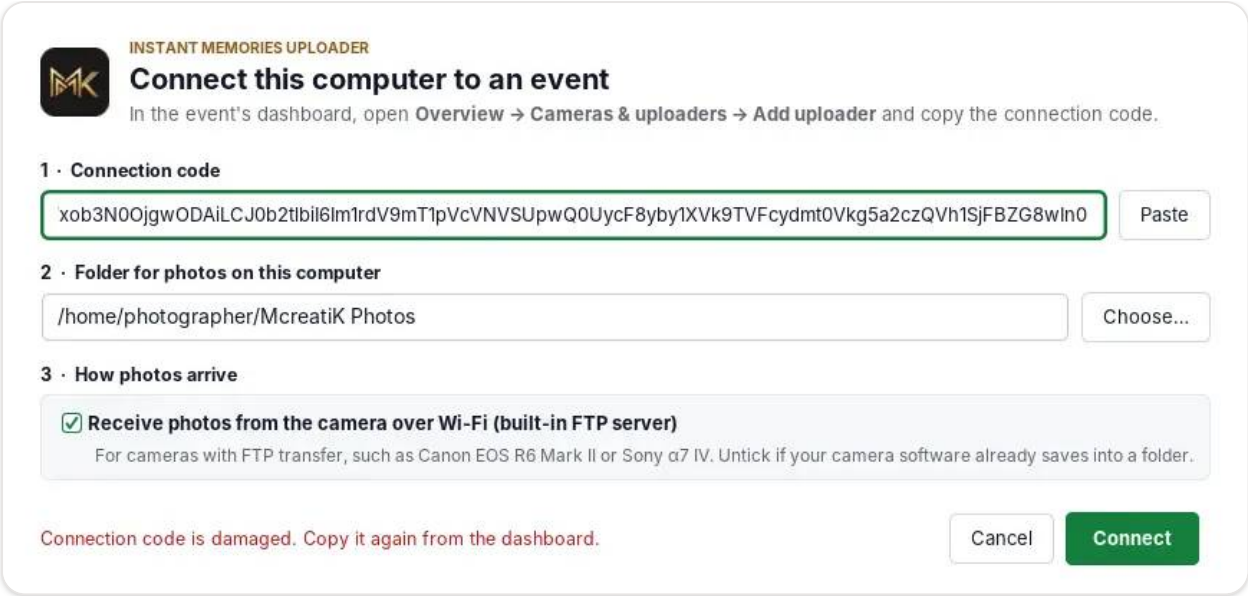


Setup with the connection code pasted, ready to connect

Next time it remembers the event and goes straight to the main window.

After installing, in short:

1. **First open:** Windows → **More info → Run anyway**; Mac → **System Settings → Privacy & Security → Open Anyway**.
2. **Get the code:** open the event → **Overview → Cameras & uploaders → Add camera & get code → Copy code**.
3. **Connect:** in the uploader press **Paste**, choose the photo folder, choose **camera Wi-Fi (FTP)** or **folder**, then **Connect**.
4. **Camera Wi-Fi:** type the **Server, Port, User and Password** shown on the event's **Live** page into the camera's FTP settings, then take a test shot and check that it appears.
5. **More cameras:** press **+ Add camera** in the uploader and use the port it shows.
6. **Change to another event:** wait until everything is uploaded (the queue is empty), then **Events → Change event...**, paste the new event's code and press **Connect**. The uploader restarts on the new event (section 4).
7. **Freelancer:** send them the code and the download link. **Get new code** removes their access.

3. The main window

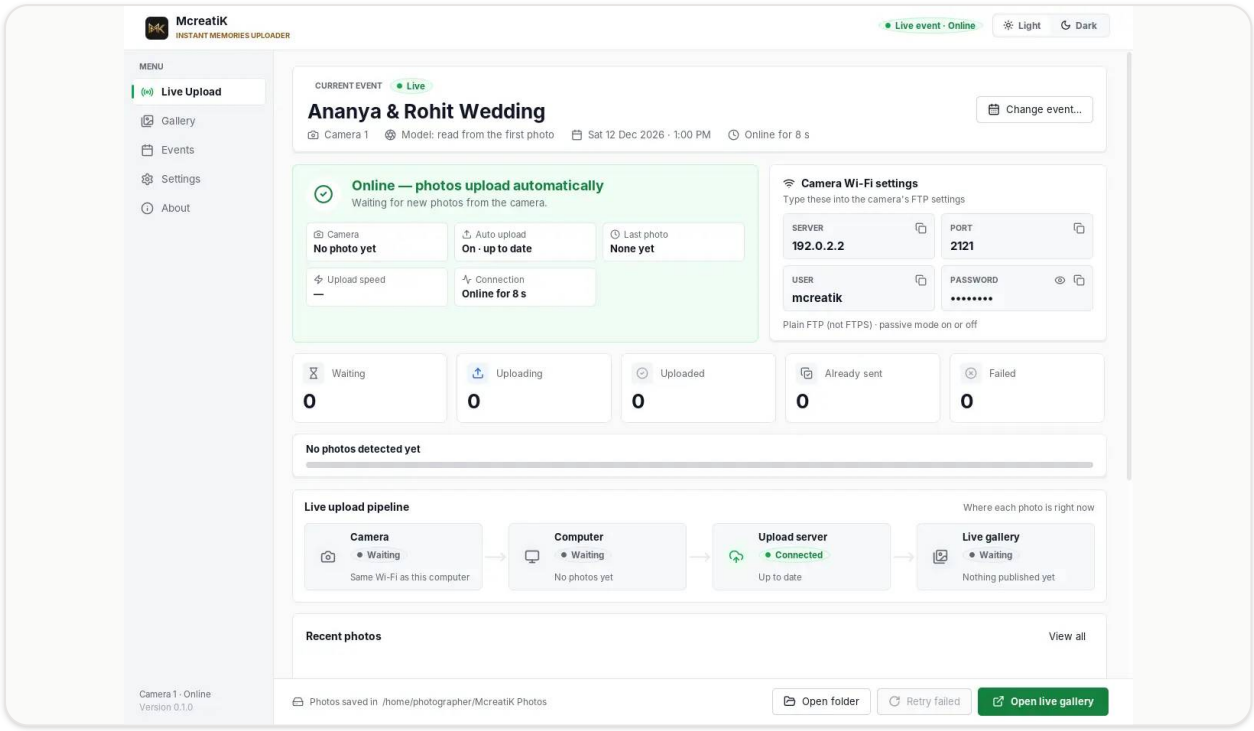


Uploader waiting for the camera

The menu on the left has five pages: **Live Upload** (the event-day screen), **Gallery** (every photo from this camera for the event), **Events** (the current event and Change event…), **Settings** and **About**.

On **Live Upload**, from top to bottom:

PART	MEANING
Event card	The event name, the camera (for example "Camera 1"), the camera model (read from the first photo), the event's date and time, and how long the laptop has been connected. **Change event...** is on the right (section 4)
Status card	**Online** (green): photos upload automatically. **Reconnecting** (blue): the internet just dropped. **Offline** (amber): no internet for 2 minutes or more, photos are queued. **Error** (red): something needs you, and the reason is shown. Below: photos received from the camera, auto upload, last photo, upload speed and connection time
Camera Wi-Fi settings	What to type into the camera: **Server** (this laptop's address), **Port 2121**, **User mcreatik**, **Password**. The password is hidden until you press the eye. Each value has a **Copy** button, which shows **COPIED**
Waiting · Uploading · Uploaded · Already sent · Failed	The queue counts, with a bar: "Uploaded X of Y photos detected" ("Already sent" means McreatiK already had that photo, so it was skipped)
Live upload pipeline	Camera → Computer → Upload server → Live gallery. Green = done, blue = working, grey = waiting, red = needs attention
Recent photos	The latest photos with a thumbnail, size, time and status. **View all** opens the Gallery page
Open folder · Retry failed · **Open live gallery**	Quick actions (Retry failed lights up only when something failed). The photo folder is shown on the left


The light and dark look are switched with **Light | Dark** at the top right. The app remembers the choice on this computer.

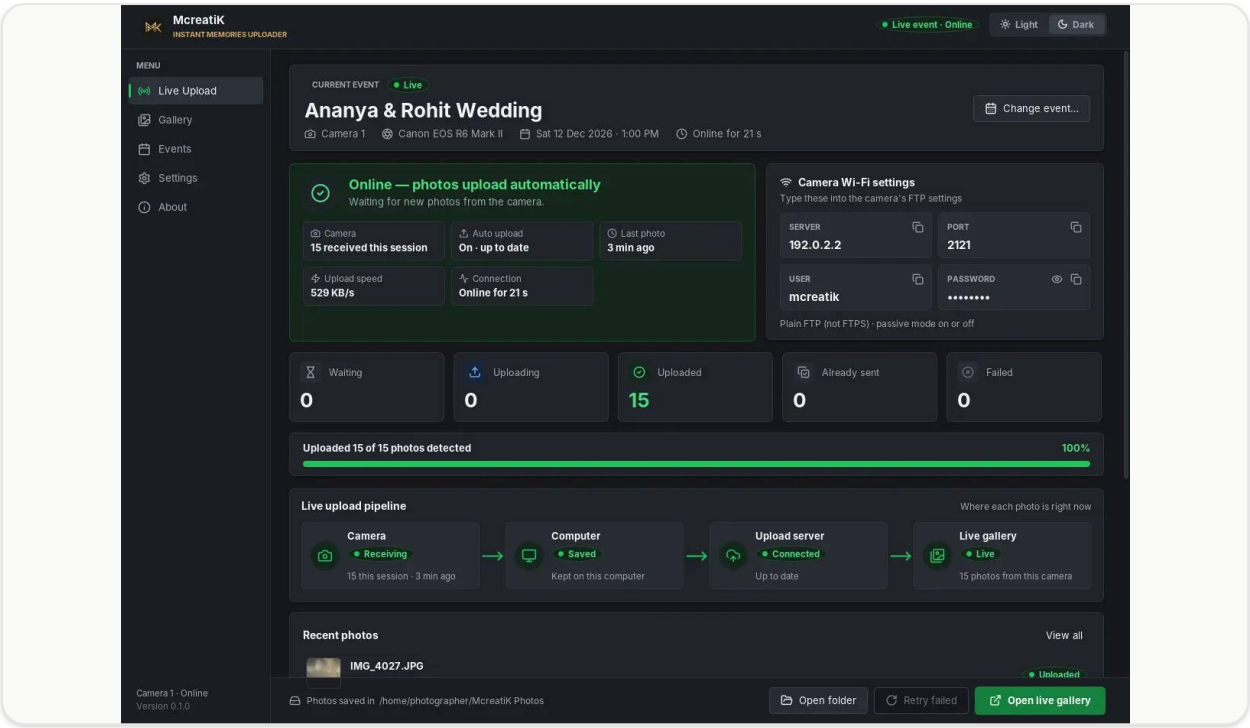


Dark mode: the same screen, easier on the eyes at night

Now set up the camera (any camera with FTP transfer works; we have step-by-step examples): **Canon EOS R6 Mark II** · **Sony α7 IV**.


When the first photo arrives, the **Camera** stage of the pipeline turns green (**Receiving**), and the status card counts the photos received.

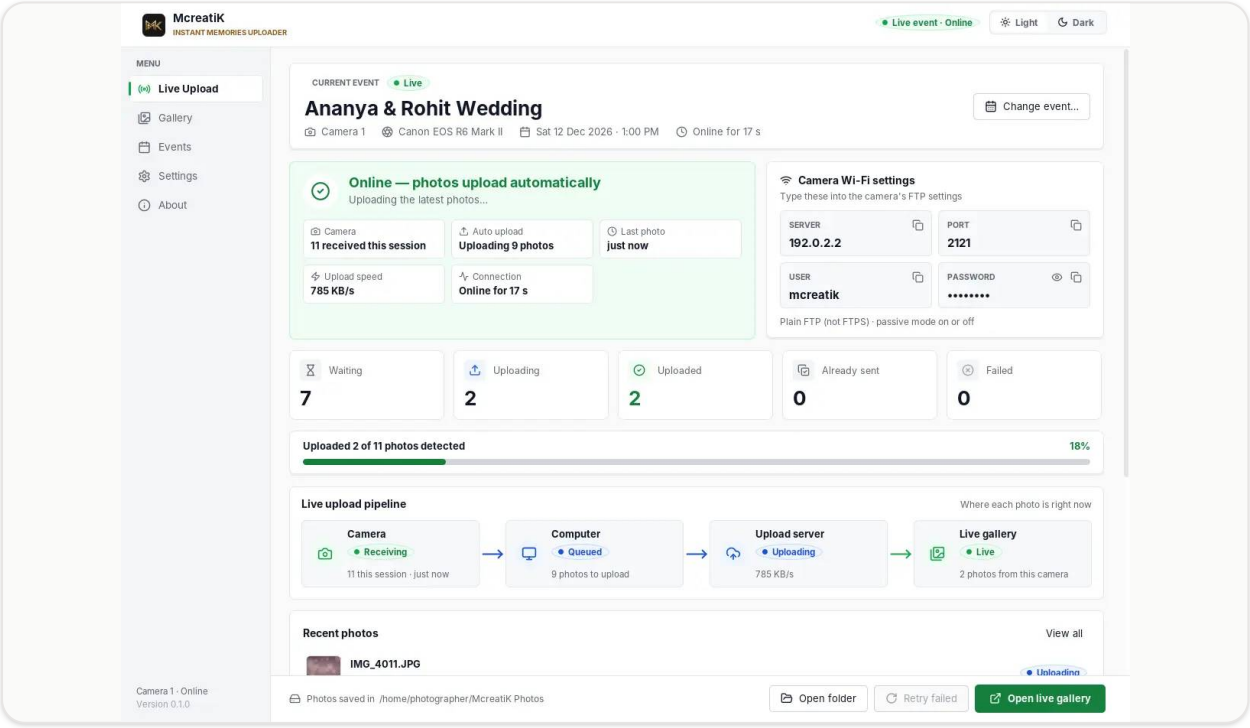

Photos arriving from the camera and uploading

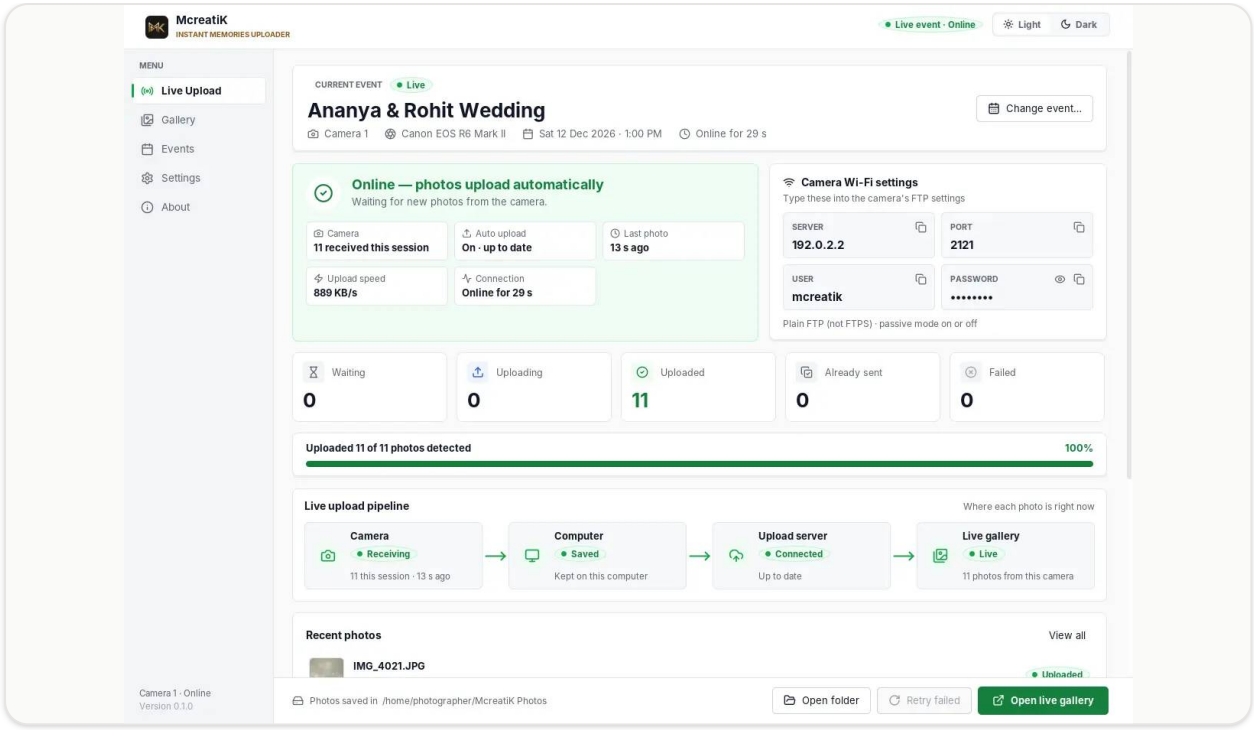

All photos uploaded

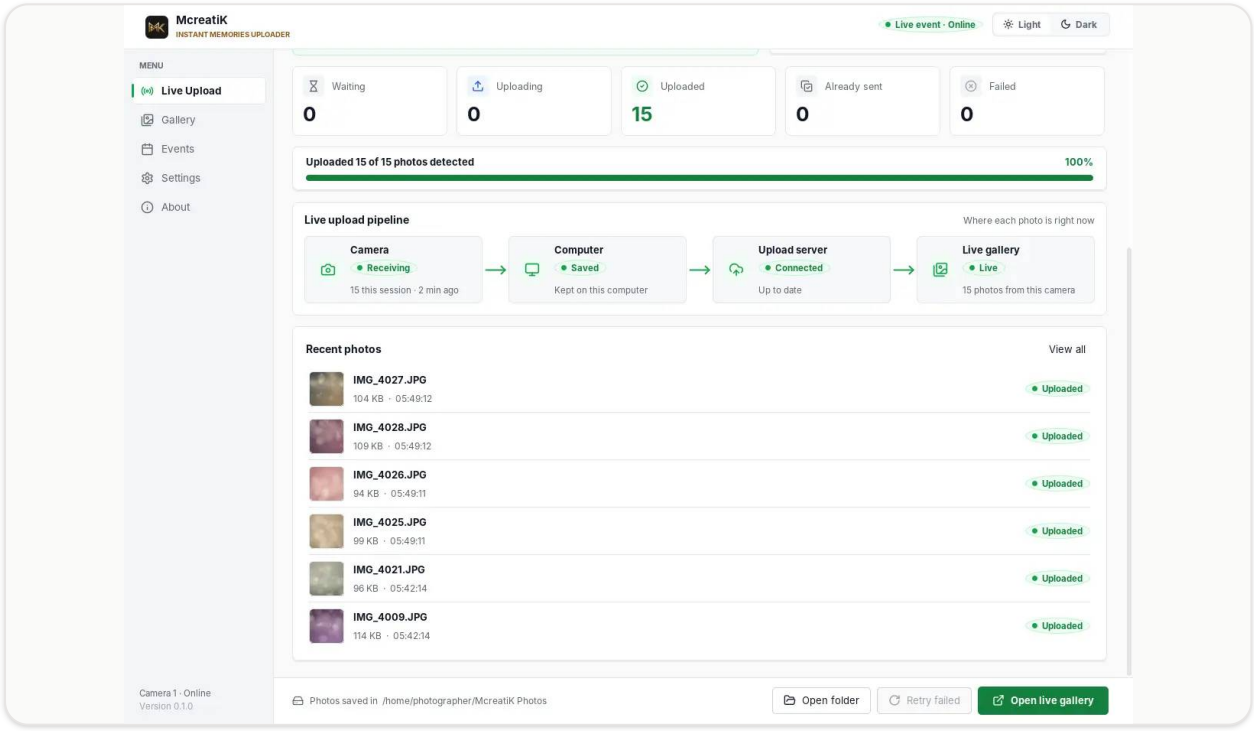


Recent photos with thumbnails, and the pipeline all green

---


4. Switching to another event

The uploader remembers its event, even after you close it or install an update. For each new event, connect it to that event's code:

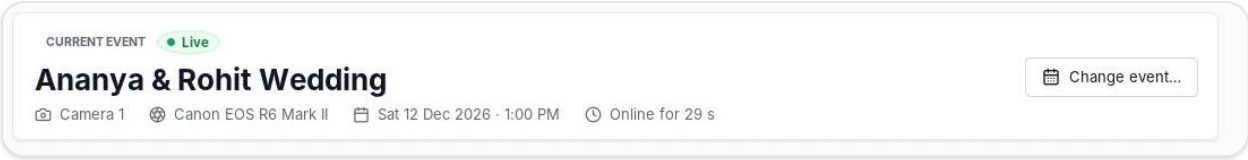

Change event... is on the right of the event card (also on the Events page)

1. Wait until everything is uploaded: **Waiting** and **Uploading** are both **0**, so every photo has reached the event you just shot.
2. In the **new** event's dashboard, go to **Overview → Cameras & uploaders**:
   - No camera there yet: type a name, press **Add camera & get code**, then **Copy code**.
   - The camera is already listed (you added it when you created the event): press **Get new code** next to it, then **Copy code**. The dashboard never shows a code again after its pop-up closes, so this is how you get one later.
3. In the uploader, press **Change event...** (on the event card, or on the **Events** page), then **Paste**, then **Switch event**.

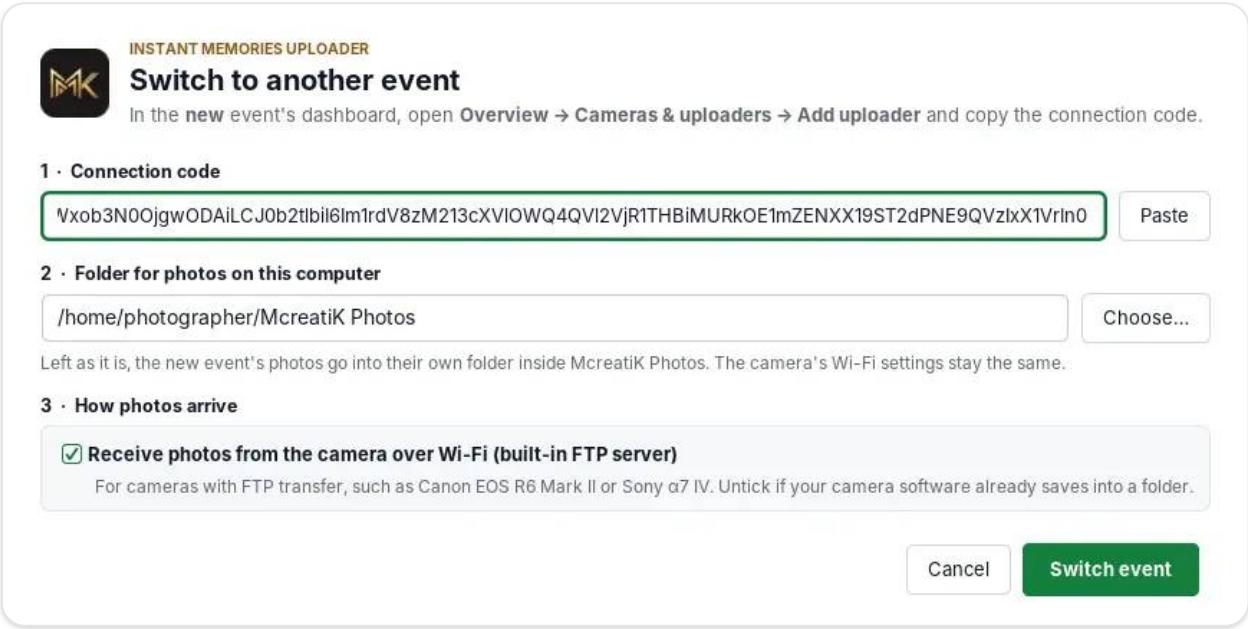


Switch to another event: paste the new code

The uploader restarts by itself and shows the new event's name, with the counters back at 0.

- **The camera settings don't change.** The Server, Port, User and Password stay the same, so the camera needs no setup.

- **Each event gets its own folder** inside McreatiK Photos (for example `McreatiK Photos/Kavin & Nila Reception`). If you chose a folder yourself, it's kept.
- **Old photos are never sent to the new event.** The uploader remembers every photo it has already sent.

If photos are still waiting, the uploader asks you to wait first, so no photo from one event can end up in another:

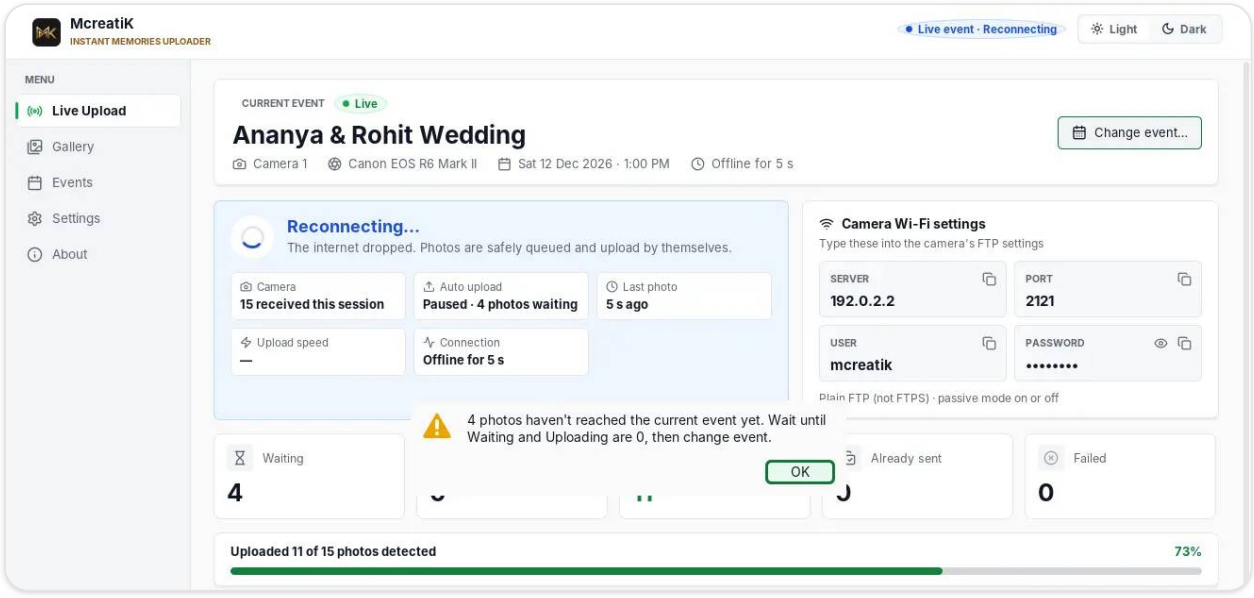

Photos still waiting: wait until Waiting and Uploading are 0


If the internet is down, connect the laptop first and let the queue empty. Then change the event.

> **Tip** A renamed event or camera in the dashboard shows in the uploader within a minute. There's no need to restart.

---


5. When the internet drops

The status turns blue (**Reconnecting...**), and after 2 minutes amber (**Offline — photos are safely queued**). The camera can keep sending, and photos wait in the queue on the laptop.

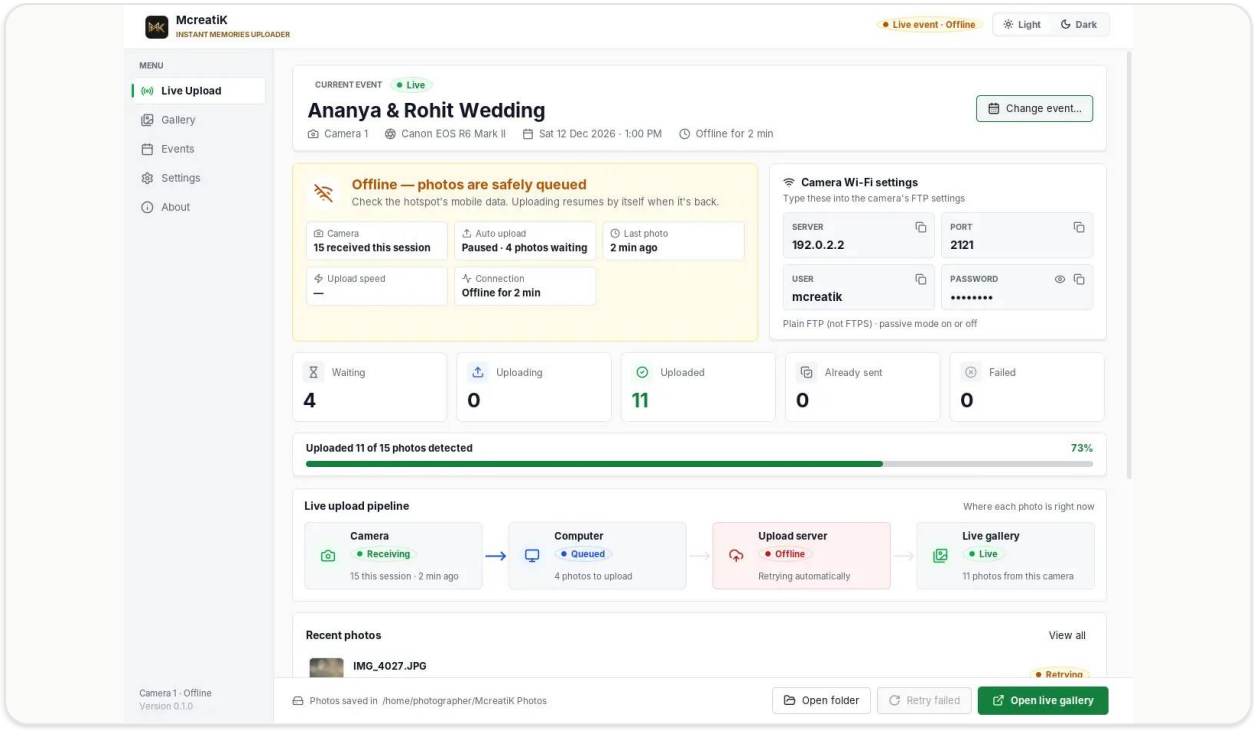

Offline: photos wait in the queue

When the connection returns, they upload by themselves, oldest first, and guests' phones catch up. There's nothing to press.

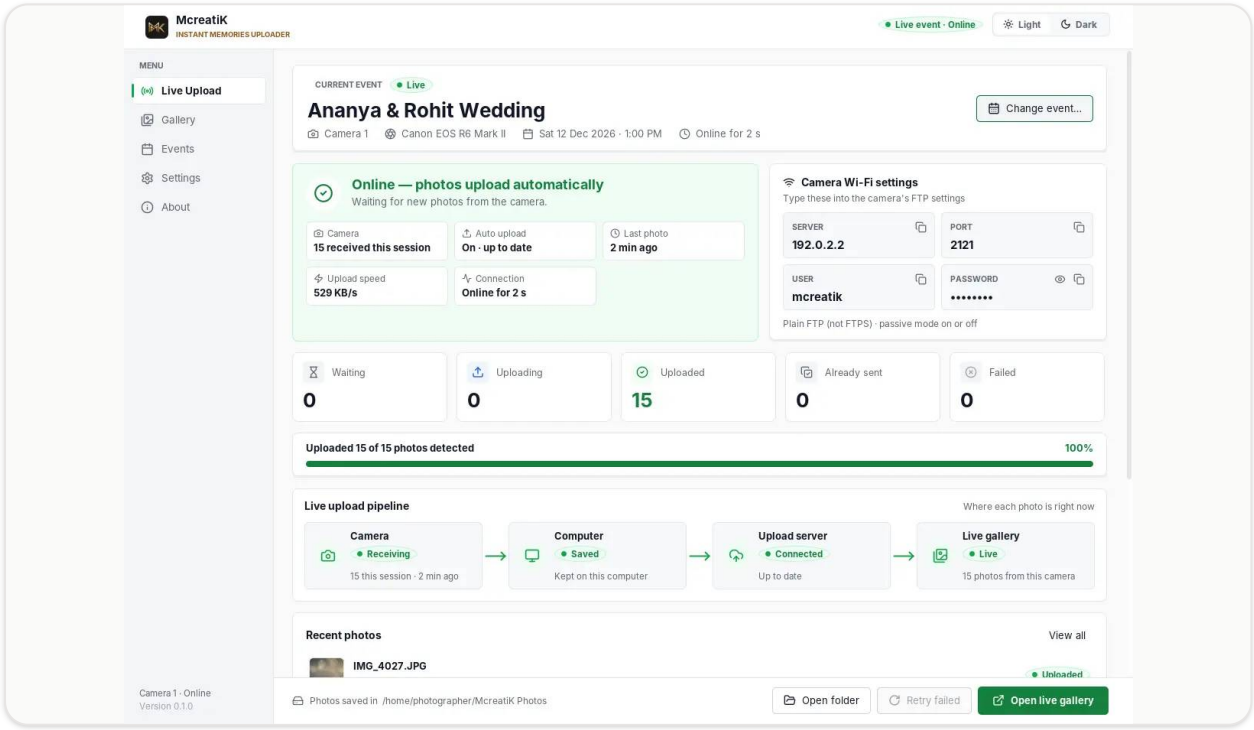

Back online: the queue empties by itself

Already sent counts photos McreatiK already had (for example the camera sent one twice). They're skipped, which is normal. **Failed** photos (rare) are listed in red with the reason; fix it, then press **Retry failed**.

6. Keep the laptop ready

Windows

- When the firewall asks, click **Allow** for **McreatiK Instant Memories Uploader** on **Private and Public** networks. A new phone hotspot counts as Public.
- Settings → System → Power & battery: **never sleep when plugged in**. Keep it plugged in.

Mac

- When macOS asks whether **McreatiK Instant Memories Uploader** may accept incoming network connections, click **Allow**. If you clicked Deny, go to System Settings → Network → Firewall → Options and allow it.
- System Settings → Battery → Options: **prevent automatic sleeping on power adapter when the display is off**. Keep the lid open; a closed lid sleeps the Mac.


Both

- The camera and the laptop must be on the **same Wi-Fi or phone hotspot**. iPhone hotspot: turn on **Maximize Compatibility**. Android hotspot: use 2.4 GHz.
- The laptop's address changes with each network (iPhone hotspot usually `172.20.10.x`, Android `192.168.43.x`). Always use the **Server** shown in the window.

---

7. Several cameras on one laptop (up to 4)

One uploader can receive photos from up to **4 cameras at the same time**, for example a main photographer and a candid photographer. Each camera appears in the gallery under its own name, with its own photo count in the dashboard.

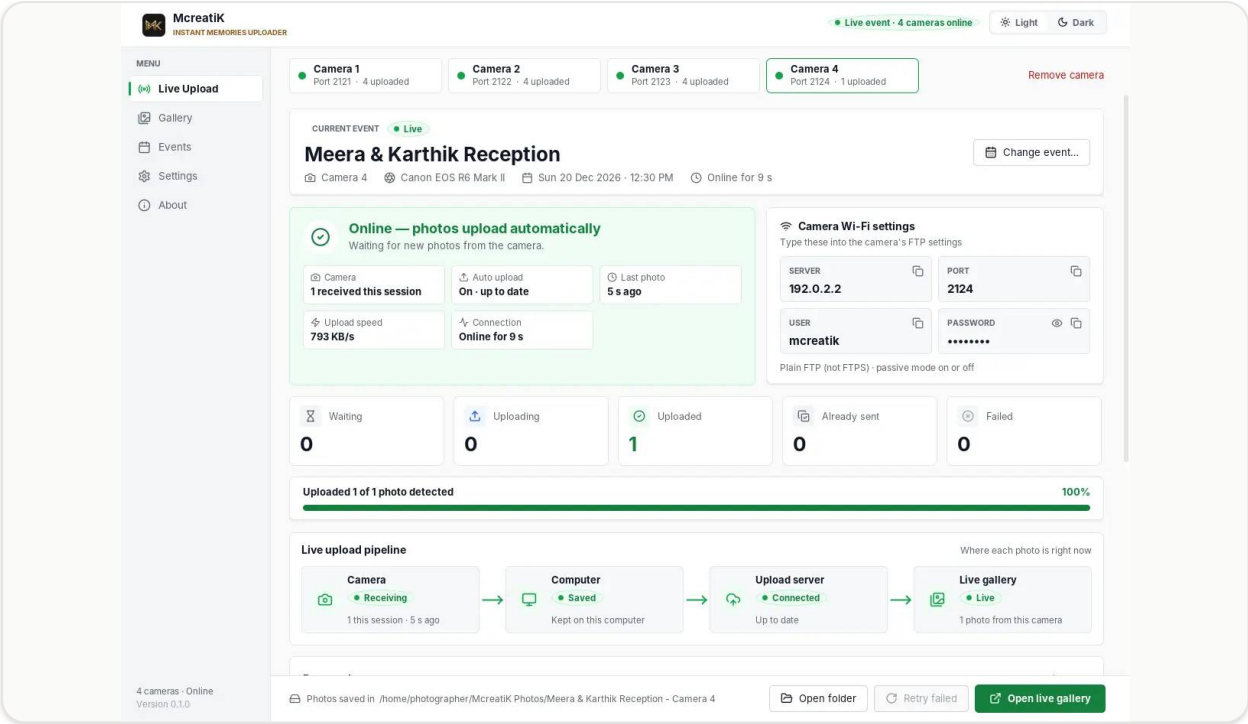

Four cameras on one laptop: each tab shows its port and photos uploaded

Add a camera

1. In the uploader, press **+ Add camera** (next to the camera tabs at the top).
2. **Name the camera**, for example *Candid - Divya* or *Drone*. The name shows on its tab, in the dashboard, and on its photo folder. Leave it as suggested ("Camera 2") if you like.
3. The new camera is created in the same event straight away, with no code needed. A message shows its **port**:



Camera 2 is ready: use Port 2122

1. In that camera's FTP settings, use the **same Server, User and Password** as Camera 1, and the camera's own **Port**:

CAMERA	PORT
Camera 1	2121
Camera 2	2122
Camera 3	2123
Camera 4	2124

If one of these ports is taken by another program, the uploader picks the next free one and shows it. Always use the port on the camera's tab.

While shooting

- Click a camera's tab to see its status, settings, counters, pipeline and photos. The dot on each tab is green when that camera is fine, blue while reconnecting, amber when offline and red when it needs attention.
- The top right shows all cameras together, for example "Live event · 4 cameras online".
- Every event has **one folder**, with **a sub-folder for each camera**, named after the camera:

```
McreatiK Photos/
  Meera & Karthik Wedding/
    Main - Karthik/
    Candid - Divya/
```

Copy


Events set up with an older version keep their folders as they were.

Rename a camera Select its tab and press **Rename**. The new name shows here and in the dashboard straight away (you can also rename it in the dashboard). Its folder keeps its name, so nothing moves while you're shooting.

Pause a camera (private moments) Select its tab and press **Pause** (or press **Pause** next to the camera in the dashboard). While a camera is paused:

- photos that haven't uploaded yet, and **every new photo**, stay on the laptop in that camera's **Not uploaded (paused)** folder;

- **none of them go to the gallery**, even after you resume;
- the tab, the status card and the dashboard show **Paused** in amber.

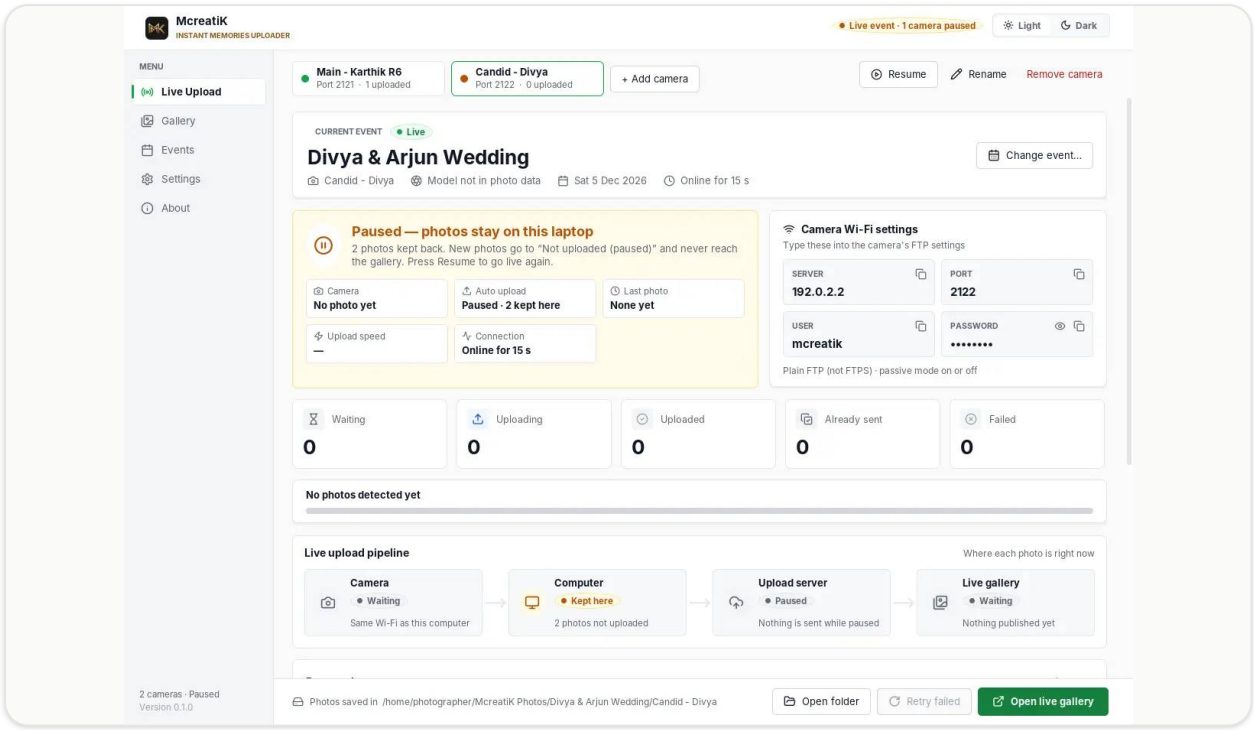

A paused camera: its photos stay on this laptop

Press **Resume** to go live again: only photos taken after resuming upload. Use it for moments that shouldn't go live, such as the bride getting ready. To share some of the paused photos later, upload them from the dashboard (**Photos → Guest gallery**).

Remove a camera Select its tab and press **Remove camera** (Camera 1 can't be removed). It is allowed only when that camera's Waiting and Uploading are 0. Its photos stay in the gallery and in its folder.

Next event Change event... moves **all** cameras to the new event. The ports and password stay the same, so no camera needs new settings.

> **Note** All cameras share this laptop's Wi-Fi, internet and battery. Keep it plugged in, close to where you shoot, and on a good hotspot. If the laptop sleeps, every camera stops.

Other options: `--headless` (no window, for advanced use), and `--upload-originals` (send full-size files for server-side processing instead of the light

copy).

---

8. Rehearsal before the first paid event

Do this once per laptop, with the real camera, on a test event:

1. The app installs and opens (first-open steps above).
2. The uploader shows **Online** (green).
3. The firewall prompt was allowed.
4. The camera connects: the Camera stage shows **Receiving** and "N received this session".
5. 10 single frames appear in the gallery within seconds.
6. 3 bursts of about 20 frames all arrive.
7. Turn the hotspot's internet off for a minute, shoot 5, then turn it back on: the 5 upload by themselves.
8. Quit the uploader, shoot 5, start it again: nothing is missing.
9. 30 minutes with the display off: the laptop didn't sleep.
10. Note battery use per hour.

Do this rehearsal for every new laptop and every new camera model before a paid event.

Troubleshooting

SYMPTOM	FIX
"Windows protected your PC" / Mac "can't be opened"	The app isn't code-signed yet: Windows → More info → Run anyway; Mac → System Settings → Privacy & Security → Open Anyway.
Setup says the code is invalid	Copy the whole code again from the dashboard (it starts with `MCK1.`). Lost it? **New code** on the dashboard.
Blue "Reconnecting" or amber "Offline"	No internet on this laptop: check the hotspot's data. Photos are safe in the queue.
Red "The camera can't send photos"	The camera receiver couldn't start, usually because another program uses port 2121: close that program, or start the uploader with `--ftp-port 2131` and enter 2131 in the camera.
Camera: "cannot connect to FTP server"	Same Wi-Fi? Server address typed exactly as shown? Port 2121? Firewall allowed?
"Could not start on port 2121"	Another program uses it: close it, or start the uploader with `--ftp-port 2131` and enter 2131 in the camera.
Photos stop after a while	The laptop slept (keep it plugged in and the lid open; the Mac app keeps itself awake), or the camera slept (extend its auto power off).
Dashboard shows the camera Offline	The uploader on that laptop is closed or has no internet.
It still shows the **old event's name**	The uploader remembers its last event. Press **Change event...** and paste the new event's code (section 4).
Red "This uploader was removed from the event"	Someone deleted this uploader in the dashboard. Add a new one there, then **Change event...** with its code.

More: Event-day checklist and troubleshooting.

Advanced: the command-line version

For Linux, or special setups: install **Java 21** (adoptium.net → Temurin 21), then run `mcreatik-uploader.jar` (sent by McreatiK). On a Mac, start it with `caffeinate -dims java -jar mcreatik-uploader.jar` so the Mac stays awake. Options: `--data-dir`, `--ftp-port`, `--headless` (no window), `--upload-originals`.


Canon EOS R6 Mark II setup

This guide sets up the **Canon EOS R6 Mark II** to send every JPEG over Wi-Fi (FTP) to the McreatiK Instant Memories Uploader on your laptop. There's no cable and no extra software. Photos reach the laptop in about 2–3 seconds.

> **Note** The camera screens below are **illustrations** of each step, with the values to choose highlighted. Canon's menu names can differ slightly by firmware. Real photos of the camera screens will replace them later.

Before you start

- The uploader is running and shows the **Camera Wi-Fi settings** card with Server, Port, User and Password (**Uploader guide**).
- The laptop is connected to the **same Wi-Fi or phone hotspot** the camera will join.
- The camera's battery is charged, and you're shooting **RAW+JPEG** (the JPEG goes to guests; RAW stays on the card).

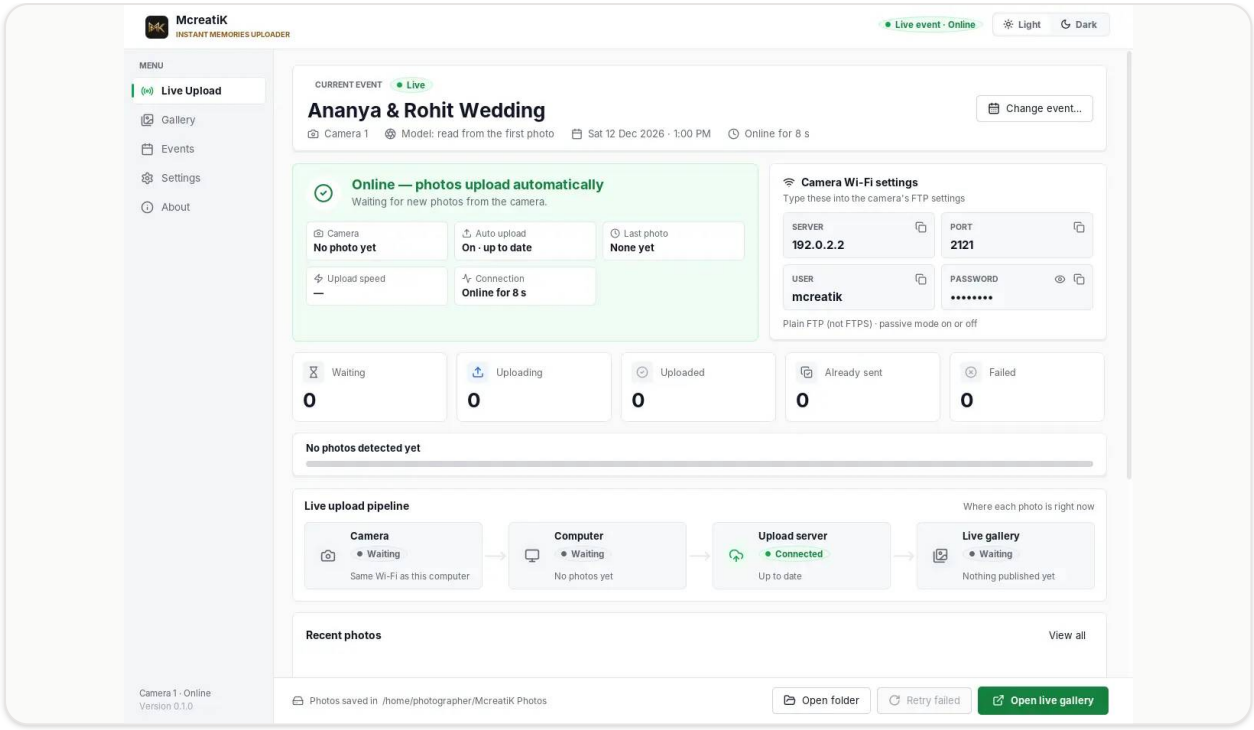


The uploader's Camera Wi-Fi settings card shows what to type into the camera

---

Setup (once per network, about 10 minutes)

Step 1: Turn the network on


MENU → Network tab → Network settings → Network: Enable.

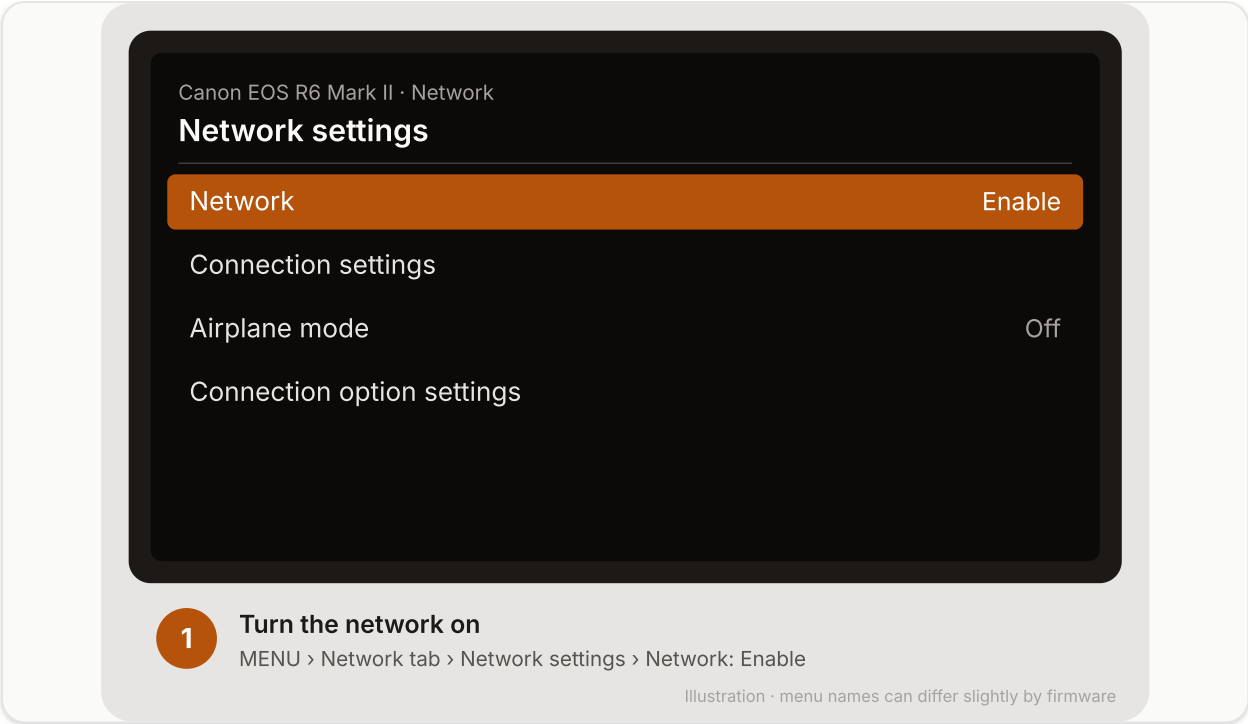

Canon step 1: Network settings, Network Enable

Step 2: Create a connection in an empty SET


Connection settings → choose an empty **SET** (for example SET2 for the event hotspot) → **Create with wizard.**

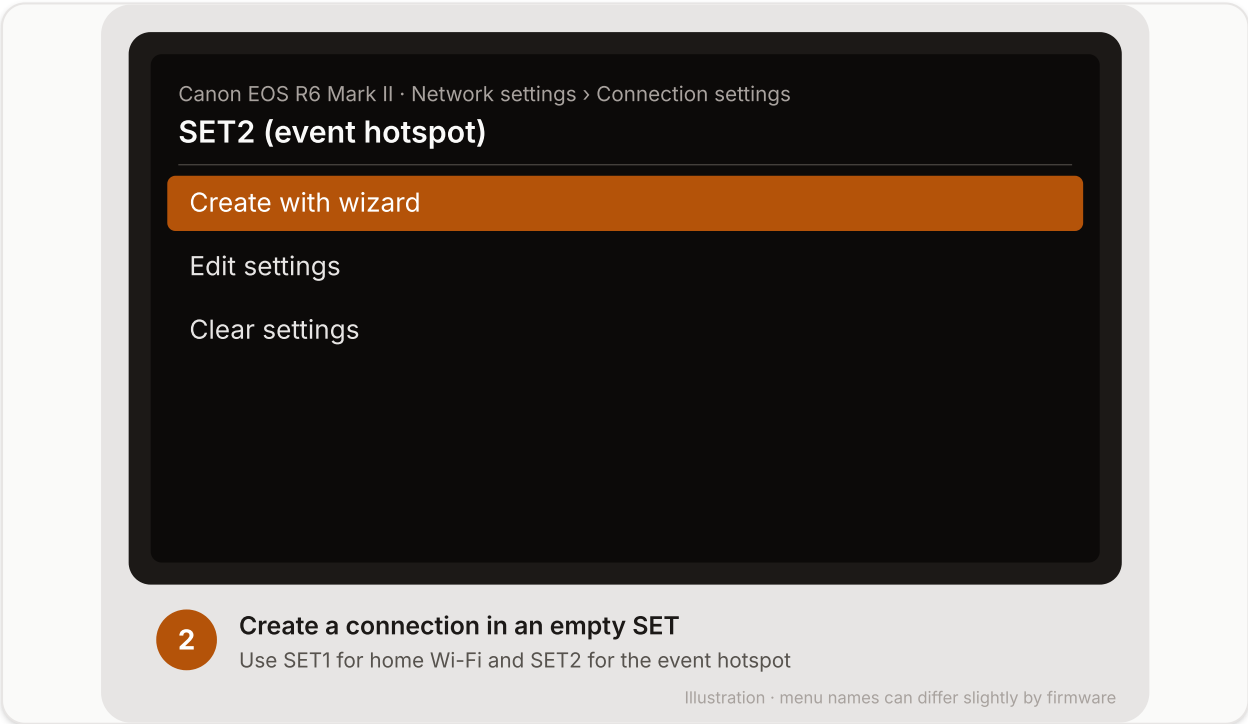

Canon step 2: Connection settings, create with wizard

Step 3: Choose FTP transfer

Select **Transfer images to FTP server**.

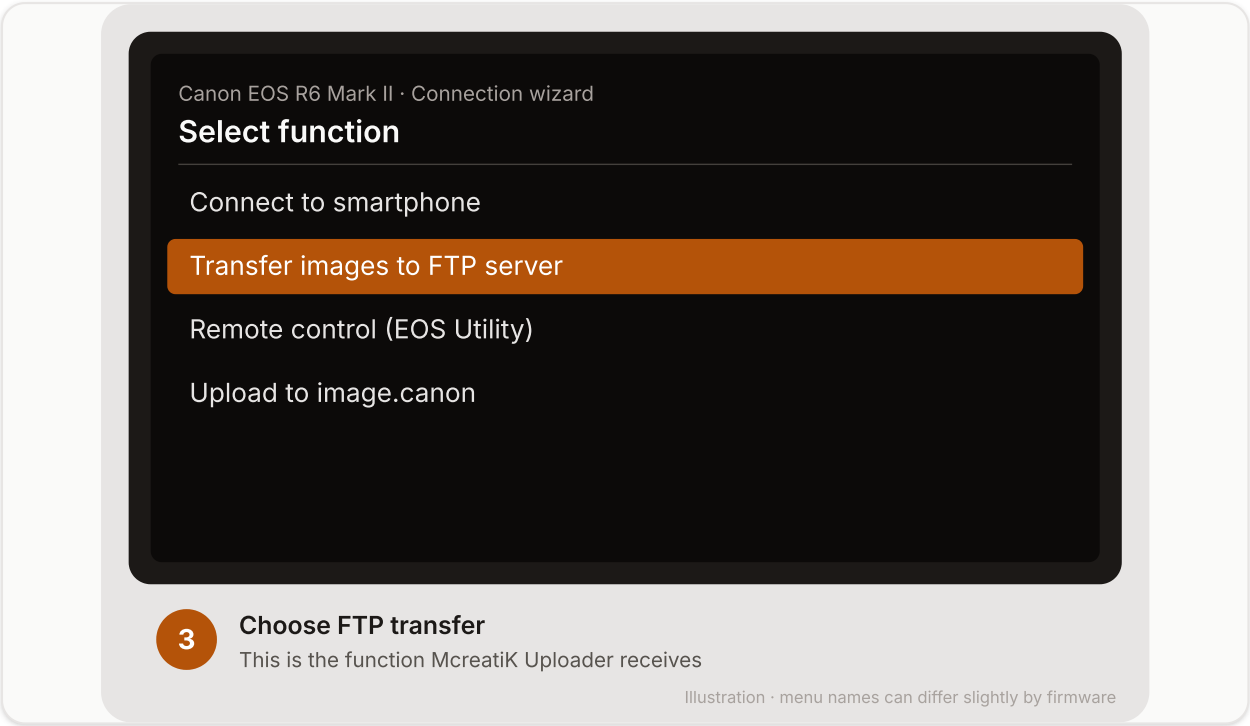


Canon step 3: Transfer images to FTP server

Step 4: Join the hotspot

Choose the same Wi-Fi network or hotspot as the laptop, then enter its password.


IP address: **Auto setting**.

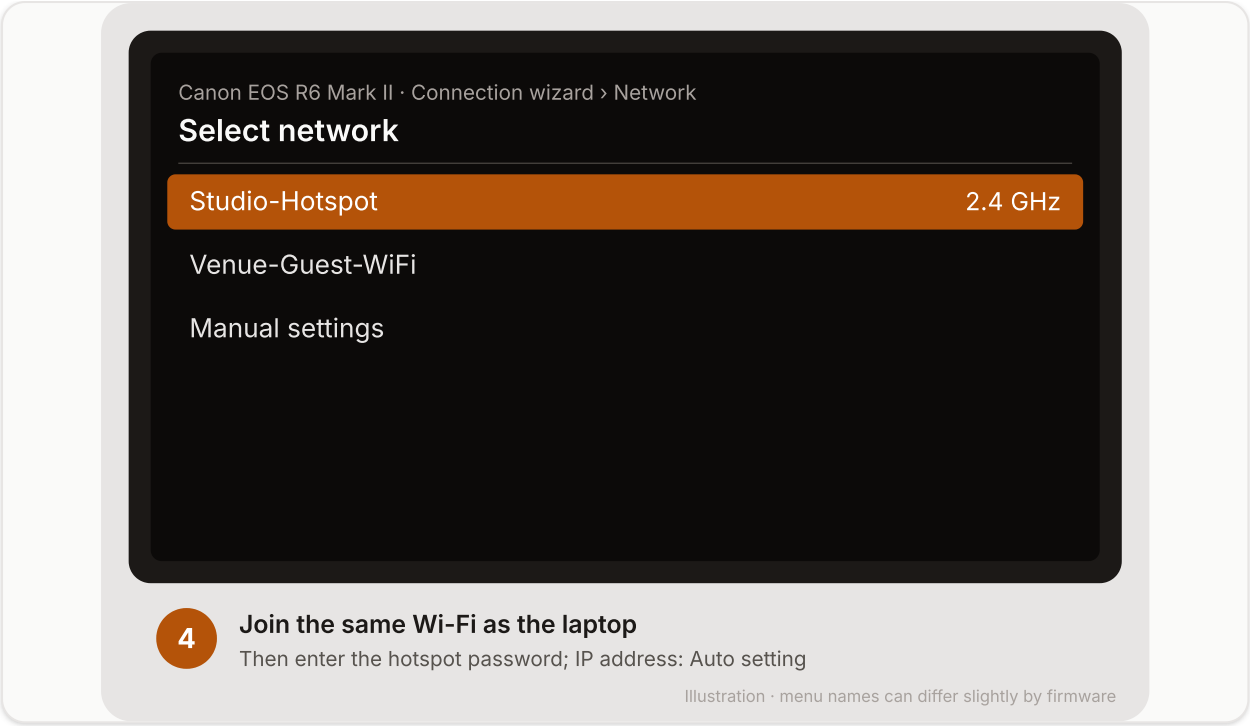

Canon step 4: select the Wi-Fi network

Step 5: FTP server settings


SETTING	VALUE
FTP mode	**FTP** (not FTPS or SFTP)
Address setting	The **Server** shown in the uploader, for example `172.20.10.3`
Port number	**2121**
Passive mode	**Enable** (both work; Enable is more reliable)
Proxy server	Do not use

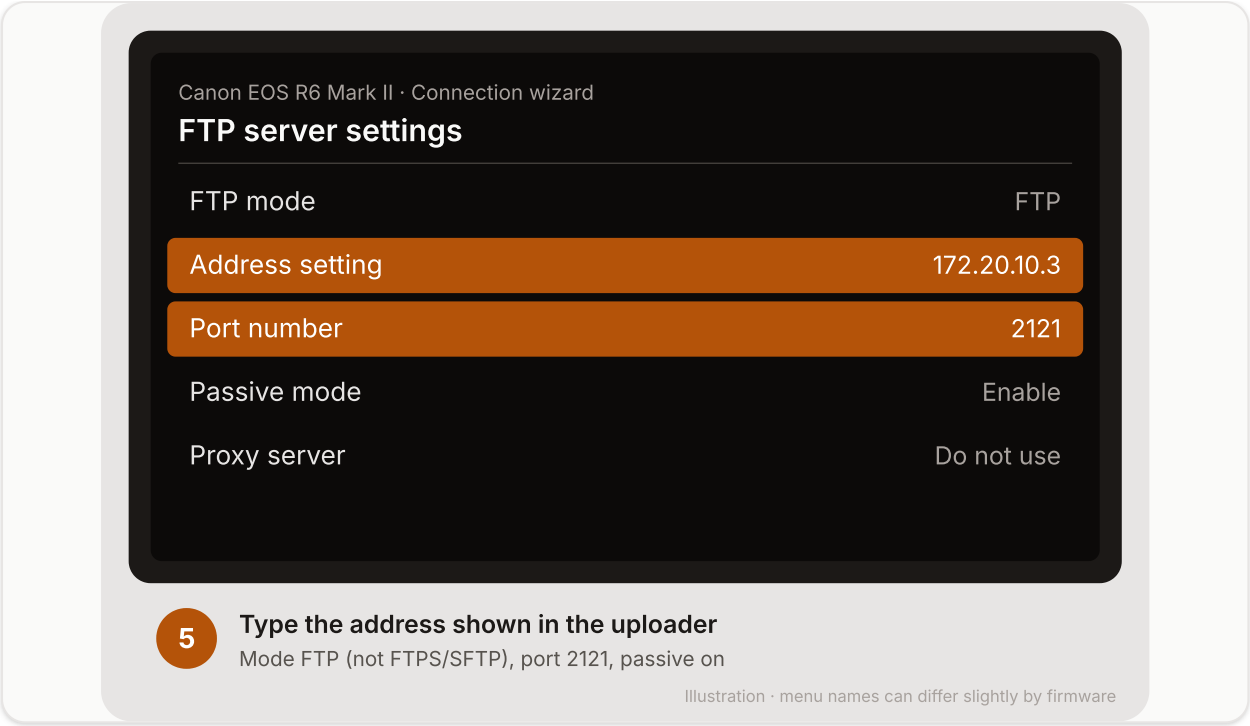

Canon step 5: FTP server address and port 2121

Step 6: Login and folder

SETTING	VALUE
Login type	Login
Login name	**mcreatik**
Login password	The **Password** shown in the uploader
Target folder	Root folder (default)

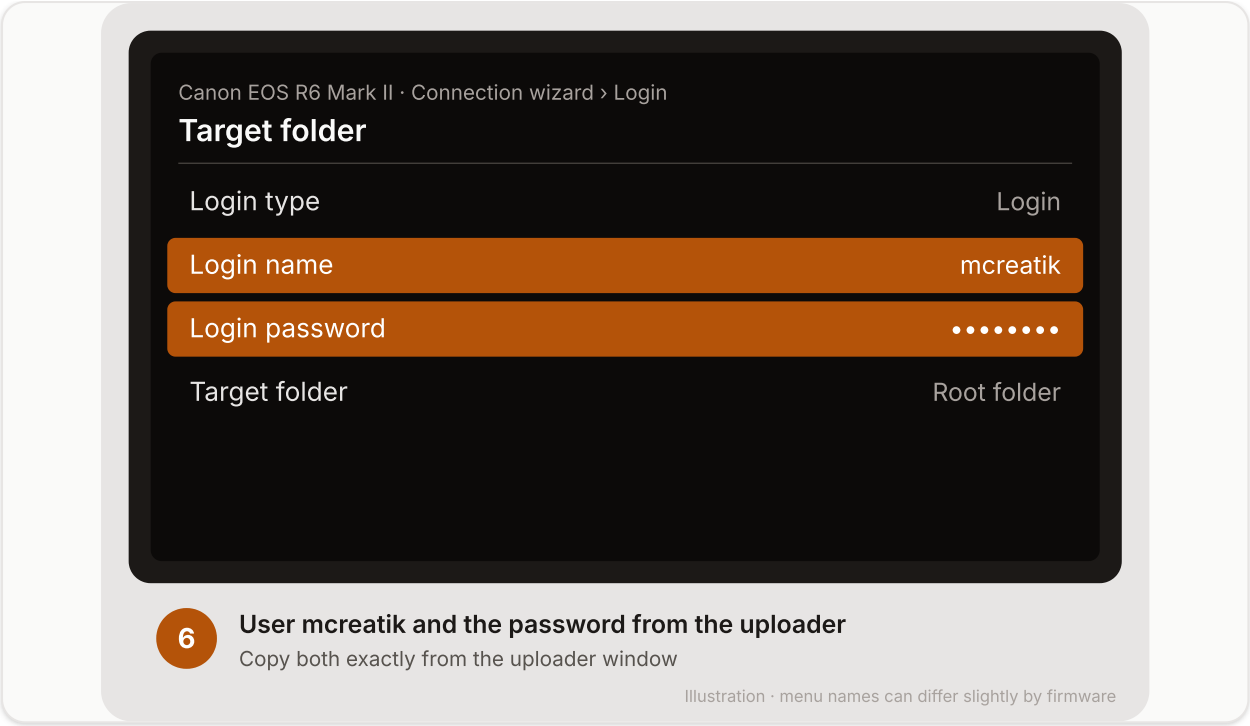


Canon step 6: login mcreatik and the uploader's password

Step 7: Send every JPEG automatically

Network → FTP transfer settings:


SETTING	VALUE
Auto transfer	**Enable**
Type/size to transfer	**JPEG** only
Transfer with SET button	Optional
If the same file exists	Skip or overwrite. Both are fine; McreatiK ignores repeats.

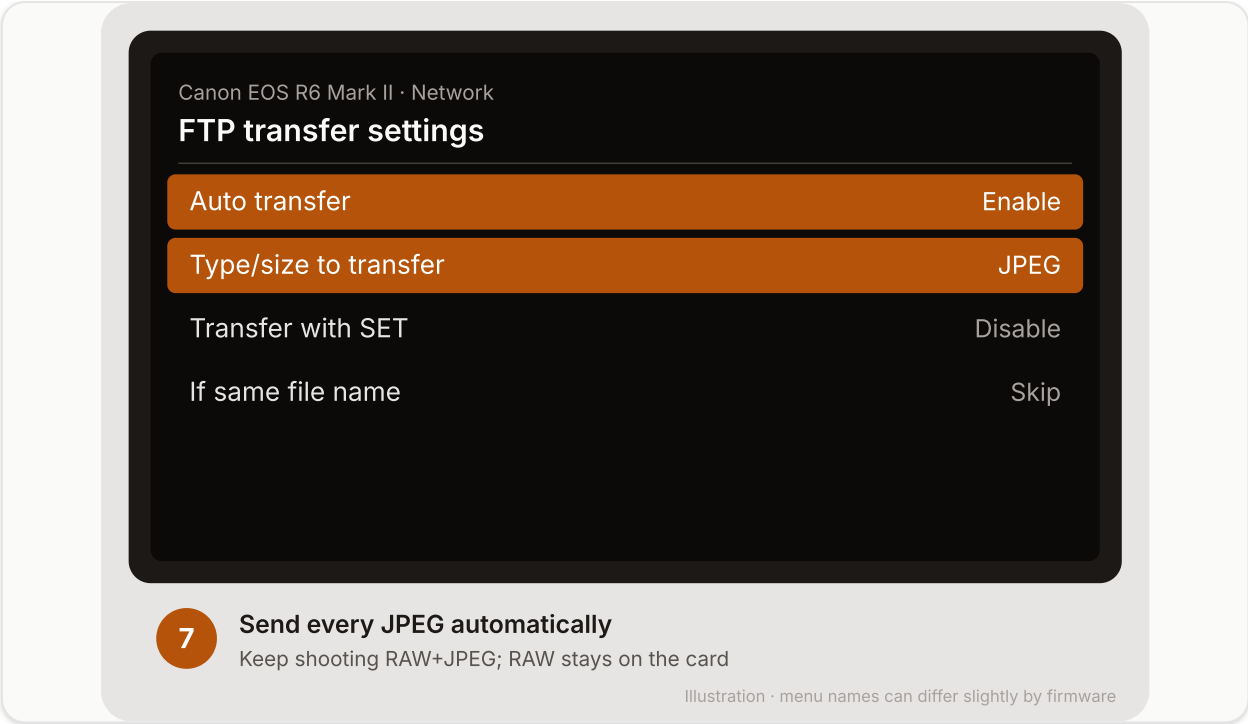

Canon step 7: Auto transfer on, JPEG only

Step 8: Stop the camera sleeping


Setup → Power saving → Auto power off: Disable, or the longest time. If the camera sleeps, Wi-Fi drops and photos wait on the card until it wakes.

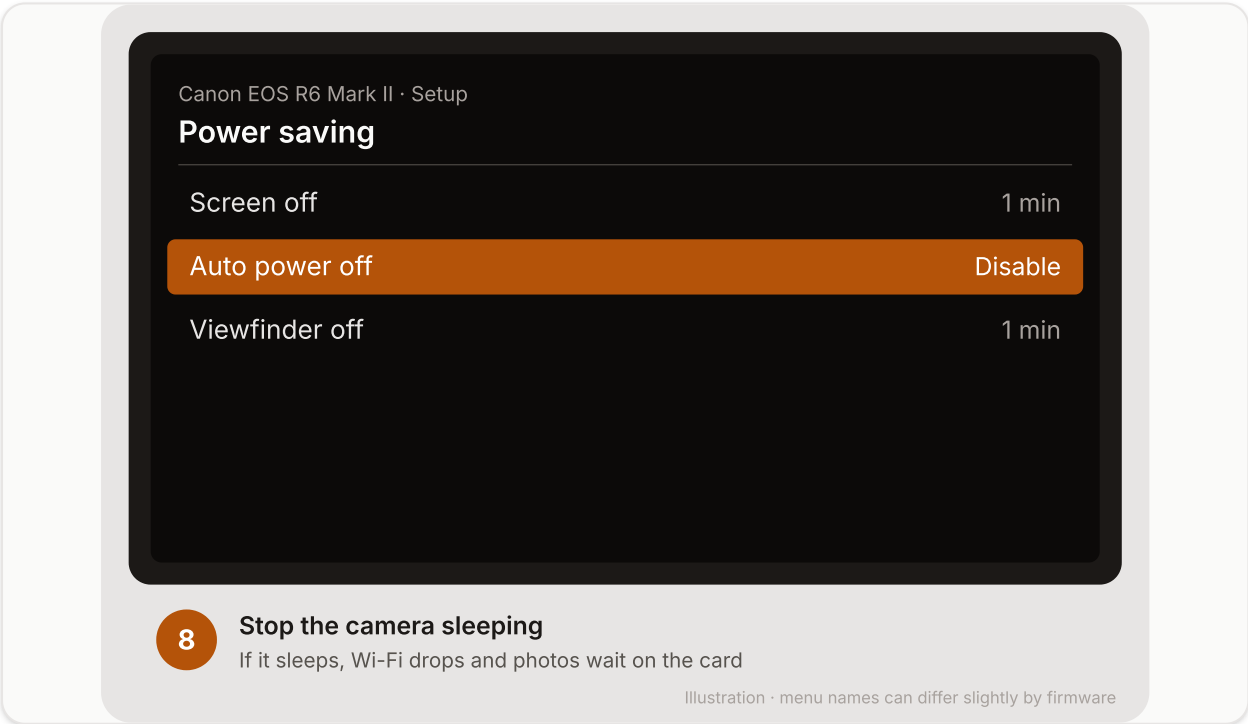

Canon step 8: Auto power off disabled

Step 9: Test

Shoot 3 frames. Within seconds the uploader shows **3 received this session**, the **Camera** stage turns green (**Receiving**), and the photos are in the gallery.

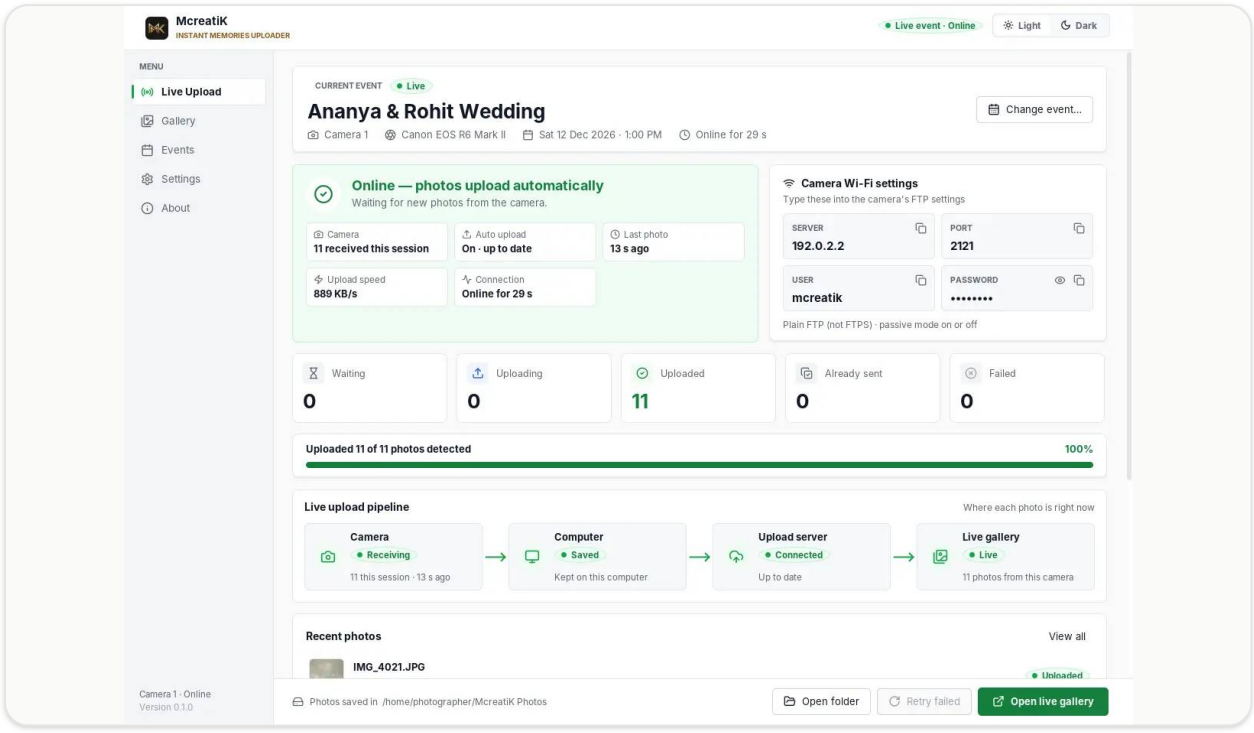

The uploader receiving photos from the camera

Home Wi-Fi and event hotspot

The laptop gets a **different address on each network**. The camera stores the Wi-Fi network and the FTP address together, so keep **one SET per network**:

- **SET1:** home or studio Wi-Fi (for rehearsals).
- **SET2:** the phone hotspot you always use at events.

Always use the **same phone** as the event hotspot. It usually gives the laptop the same address every time, so SET2 keeps working with no setup at the venue.

During the event

- Keep the laptop and hotspot within a few metres, or carry the phone hotspot on you.
- Out of range for a while? Photos the camera couldn't send are retried when it reconnects. Every photo is still on the card.
- Wi-Fi transfer uses extra battery: carry spares.

Troubleshooting

CAMERA SAYS OR DOES	FIX
"Cannot connect to FTP server"	Same Wi-Fi as the laptop? Address typed exactly as the uploader shows? Port 2121? Laptop firewall allowed?
"Busy" on the first connection	Usually clears after the first transfer. If not: allow Java in the firewall on Private **and** Public networks, check the laptop's address hasn't changed, and toggle Passive mode.
Connects, but transfers fail	Toggle **Passive mode**. Check the port is 2121.
Worked at home, not at the venue	You're on a different network: pick the hotspot SET, and check its address matches the uploader.
Photos stop after a while	The camera slept: disable auto power off. Or the laptop slept.
Uploader says "Could not start on port 2121"	Another program uses that port. Close it, or start the uploader with `--ftp-port 2131` and set the camera's port to 2131.
Several cameras on one laptop	Each camera uses the **Port on its own tab** in the uploader (2121, 2122, 2123, 2124); Server, User and Password are the same for all.

Event-day checklist and troubleshooting


Use this on the day. Print it, or keep it open on a phone. It works for the studio and for McreatiK support.

The day before

- ☐ The event exists, its status is **Upcoming**, and the date is right.
- ☐ One **uploader per camera** has been added, and each laptop shows **this** event's name. If it shows an old event, press **Change event…** and paste this event's code.
- ☐ Several cameras on one laptop: each camera is added (**+ Add camera**, with its name) and set to the **Port** on its tab.
- ☐ Private moments (getting ready): **Pause** that camera, and **Resume** when it's time to go live again.
- ☐ Every camera has been tested at home with a few shots (any camera with FTP transfer; examples: **Canon** · **Sony**).
- ☐ The event card is printed and in your studio board, and the table cards are printed (Overview → QR code → **Event & table cards**).
- ☐ Laptops and phone hotspot are charged; chargers, a power bank and spare camera batteries are packed.
- ☐ The hotspot phone has enough mobile data. Allow about **1 MB per photo**, so 1,500 photos ≈ 1.5 GB.
- ☐ The couple's login is created, or planned for after the event. They see only the Client gallery, so it stays empty until you upload finals.

At the venue (30 minutes before guests)

1. **Hotspot on.** iPhone: Maximize Compatibility. Android: 2.4 GHz.
2. **Laptop:** join the hotspot, plug in the charger, start McreatiK Instant Memories Uploader. Check it shows green **Online** and this event's name and date.
3. **Check the address.** Make sure the Server in the uploader matches the one in the camera's FTP settings.
4. **Camera:** turn Wi-Fi/FTP on and take one test shot. The uploader should show **1 received this session**, and the pipeline turns green.
5. **Phone:** scan the event card's QR code. The test photo should be in the gallery.
6. **Hide the test shot** on the Photos tab if you don't want guests to see it.
7. **Posters out:** entrance, stage side, food area.

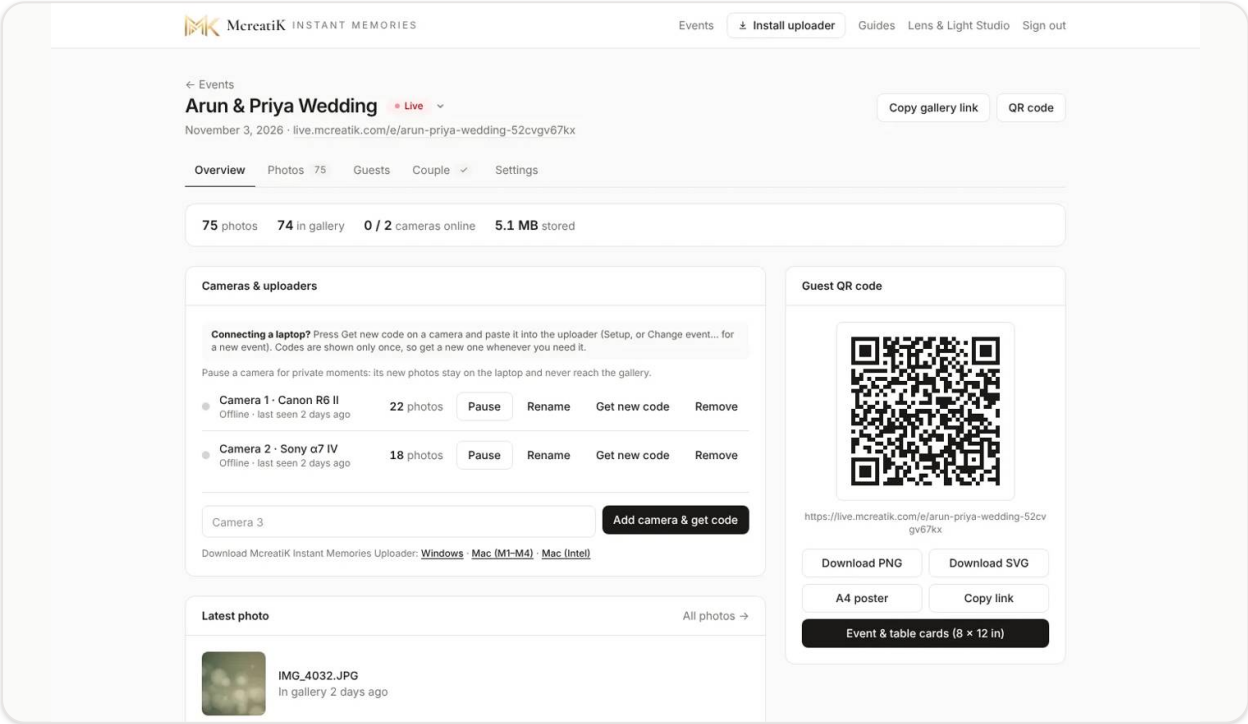

Event overview: both cameras online

During the event

EVERY	CHECK
15 minutes	The uploader is still green, and **Waiting** isn't growing
30 minutes	The dashboard shows all cameras **Online**, and the latest photo is recent
Battery change	The camera rejoins Wi-Fi by itself; take a test shot


- Something shouldn't be shown → **Photos → Guest gallery → Hide** (it disappears from every phone at once).
- A guest asks to remove a photo → their email names the file (for example IMG_1234.JPG). Type it in **Search file name** on Photos and hide it.
- A freelancer or second shooter is helping → add a camera for them, and WhatsApp them the code and the uploader download link. After the event, press **Get new code** to end their access.
- Never update the server during an event.

After the event

- ☐ Set the status to **Completed**.
- ☐ Upload your edited, full-quality finals to the **Client gallery** tab (Photos). Only the couple sees them.
- ☐ Sort into categories, and create or send the couple's login.
- ☐ Check the **Guests** tab for **HD photo requests**. Reply on WhatsApp or email, then tick **Done**.
- ☐ Look at the **Guests** tab and note the numbers for your marketing.

Troubleshooting: find the symptom


The camera won't connect

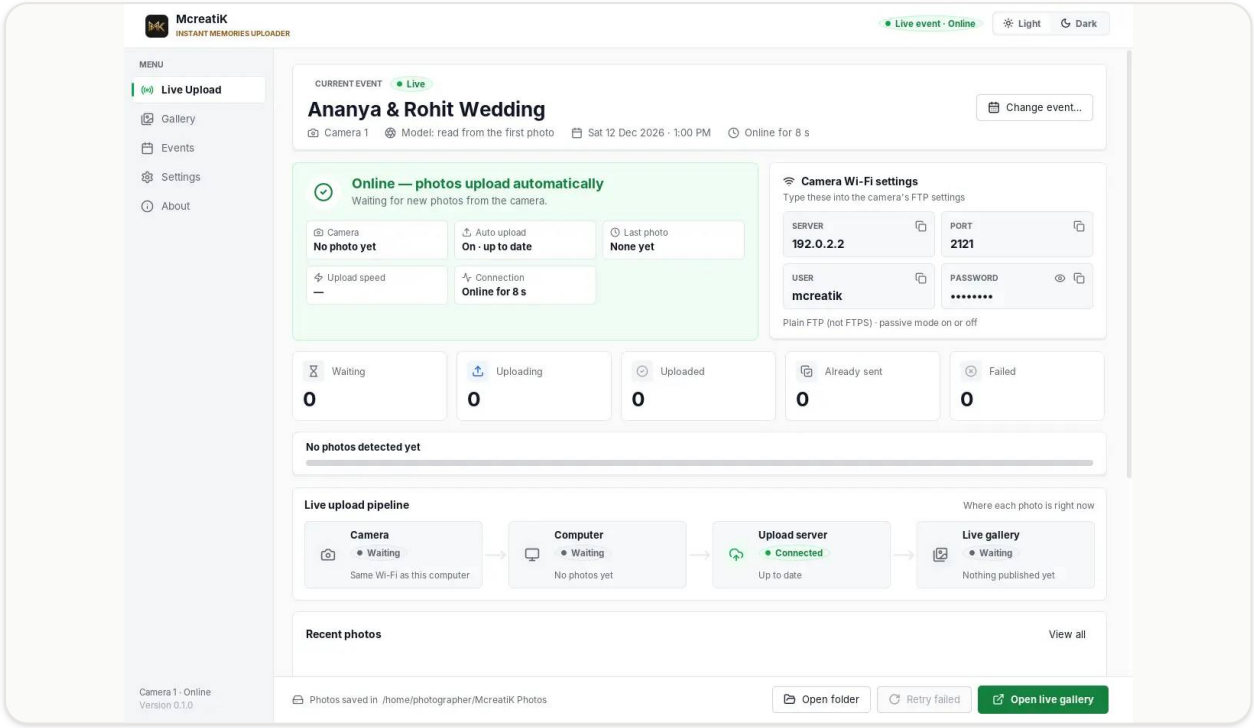

Uploader waiting: compare the Server, Port, User and Password with the camera

1. Is the camera on the **same Wi-Fi/hotspot** as the laptop? Guest Wi-Fi often blocks devices from talking to each other, so use the phone hotspot.
2. Does the address in the camera exactly match the **Server** in the uploader? It changes when the laptop joins another network.
3. Port **2121**, user **mcreatik**, password exactly as shown, plain FTP (Sony: Secure Protocol **Off**).
4. Laptop firewall: allow Java (Windows: Private **and** Public; Mac: allow incoming connections for java).
5. Toggle **Passive mode** in the camera.
6. Still stuck: restart the uploader, then turn the camera's Wi-Fi off and on.

Photos reach the laptop but not the gallery

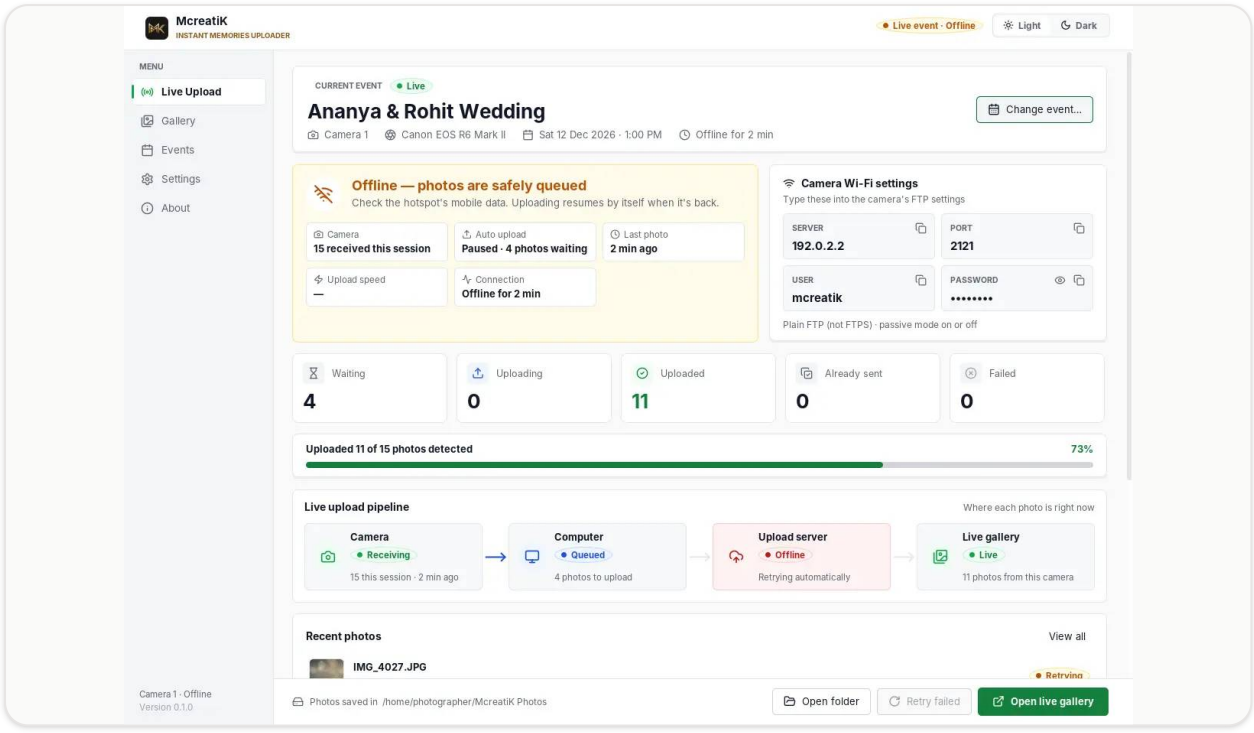

Offline: the internet is down, photos wait in the queue

The uploader is amber (**Offline**), so this laptop has no internet. Check the hotspot's mobile data and signal. Photos are safe in the queue and upload by themselves when it's back.

Photos stopped arriving

- The **camera slept**: disable or extend auto power off.
- The **laptop slept**: keep it plugged in, set "never sleep" (Windows), keep the lid open (Mac).
- Out of **range**: move the laptop or hotspot closer to where you shoot.

Guests can't open the gallery

THEY SEE	CAUSE	FIX
"This gallery isn't available"	Wrong or incomplete link, or the event is Draft or Archived	Scan the event card again; set the status to Upcoming or Live
"This gallery is currently unavailable"	McreatiK switched the gallery off	McreatiK: Event → Settings → Gallery access
The page opens but there are no photos	No photos uploaded yet, or all are hidden	Check the Photos tab
Download doesn't save	Opened inside Instagram or WhatsApp	Open in Safari or Chrome, or press and hold the photo → Save image

The dashboard shows a camera Offline

The uploader for that camera is closed, the laptop is asleep, or it has no internet. Open the laptop and check the uploader window.

Who to call

PROBLEM	WHO
Camera settings, laptop, hotspot	The studio's camera operator, using these guides
Login, gallery access, payments, anything else	McreatiK: WhatsApp +91 99527 58545 · **connect@mcreatik.com**