Index of files: the screen pictures are also supplied as separate PNG files named 01-welcome.png to 50-opencode-chat.png. This PDF contains every screen picture and the full text.

CloseCode: Light Design Handoff for the Developer

Oct 31, 2026 · @Hh4hh

Overview

This is the full light-theme redesign of CloseCode: 50 screens in a Discord-style layout, each with its own PNG file sent with this doc.

- Layout: a thin left rail of tool icons, a rounded side panel next to it, and the editor as the main surface.
- Light theme: soft off-white (not pure white), grey-white panels, blurple accent.
- Every screen opened from the sidebar or from another screen has a **back button at the top left**.
- The sidebar opens only by **swipe**. There is no menu button, no Save button (auto-save is always on), no "More" button and no AI button inside the editor. OpenCode has its own tool in the left rail (screens 46 to 50) and a setup screen in Settings.
- The app builds and installs on the same phone, so there is no device list. The Run card says it runs on this phone.
- The numbers on the overview pictures in section 4 match the numbers in the screen table and the PNG file names (for example `10-files.png`).

Design tokens (light)

Sizes are for a 360 dp wide phone. Use these values; where a picture and a number disagree, the number wins.

Token	Hex	Used for
rail	#E3E5EA	Left tool rail and status bar
panel	#F1F2F5	Side panel (top-left corner radius 26)
content	#FAFAFB	Editor and full screens
field	#E9EBEF	Search fields, grouped settings cards, key row
selected	#DCDFE5	Selected row in lists
border	#D5D8DE	Card and menu borders, dividers #E3E5EA
text	#1F2024	Titles and main text
text 2	#2E3036	Code and body text
muted	#626772	Descriptions, section labels
accent	#5865F2	Selected rail icon, primary buttons, links, toggles on
green	#248046	Run button, success, added lines
amber	#C98A0A	Modified, warnings
red	#DA373C	Errors, delete, badges

Shapes. Rail icons are rounded squares (15) with a white pill indicator when selected. List icons are 42 dp rounded squares (13) tinted 13% of their colour. Buttons radius 12 to 16. Chips are pills (30 dp tall). Section labels: 11 sp, bold, uppercase, 0.8 letter spacing. Screen titles: 16.5 sp bold. Code uses JetBrains Mono 11.5 sp.

Dark theme. Keep the earlier dark colours as the Dark option in Settings > Appearance. The light theme is the default in these pictures.

Navigation rules


1. **Open the sidebar:** swipe right on the editor. The editor card slides right (corner radius 26, dimmed) and the sidebar shows underneath. Swipe left or tap the editor card to close. No button opens it.
2. **Rail:** top = project avatar (tap for the project switcher with New project and Templates). Then Files, Search, GitHub, Terminal, OpenCode, Logcat, Problems. Settings sits at the bottom. The selected tool shows its panel; the Run card stays at the bottom of the panel.
3. **Back button:** every screen that opens from the rail panel, from a list or from another screen has a back chevron at the top left (36 dp, rounded). It goes exactly one step back. Examples: Settings > Build and Toolchain > back = Settings categories. Source control > Commit detail > back = History > back = Source control.
4. **System Back:** does the same as the on-screen back button. In the editor with the sidebar closed, first Back shows a short message "Press back again to exit" and the second leaves the app. With the sidebar open, Back closes it.
5. **Sheets and menus** (project switcher, Run sheet, long-press file menu, search options, Source control menu) close on Back or tap outside. They have no back chevron.
6. **Auto-save:** always on. No Save button anywhere.


7) **Header shows where you came from.** Every full screen title is two parts: the screen you came from (bold) and the current screen (muted, smaller). Example: Settings, then Appearance. The back button returns to the origin. Use this text:

Current screen	Header: origin	Header: current
Settings categories	(panel) Settings	none
Each Settings category	Settings	General, Editor, Code Intelligence, Build and Toolchain, Terminal, Git and GitHub, AI, Appearance, Storage, Security, About, Developer
Project settings	Blank app	Project settings
Clone a repository	GitHub	Clone a repository
Cloning	GitHub	Cloning
GitHub sign-in	GitHub	Sign in
Source control	GitHub	Source control
History	Source control	History
Commit detail	History	Commit a3f9c21
Diff view	GitHub	file name, for example Theme.kt
Terminal session	Terminal	Shell 1
New command	Terminal	New command
Build finished	Run	Build finished
Website preview	Run	Preview
Console	Preview	Console
Compose previews	Run	Previews
OpenCode chat page	OpenCode	Chat


Every screen

Overview pictures first (screens 1 to 12, 13 to 24, 25 to 36, 37 to 48, 49 to 50), then the table with behaviour. The full-size PNG of each screen is a separate file named like the table.

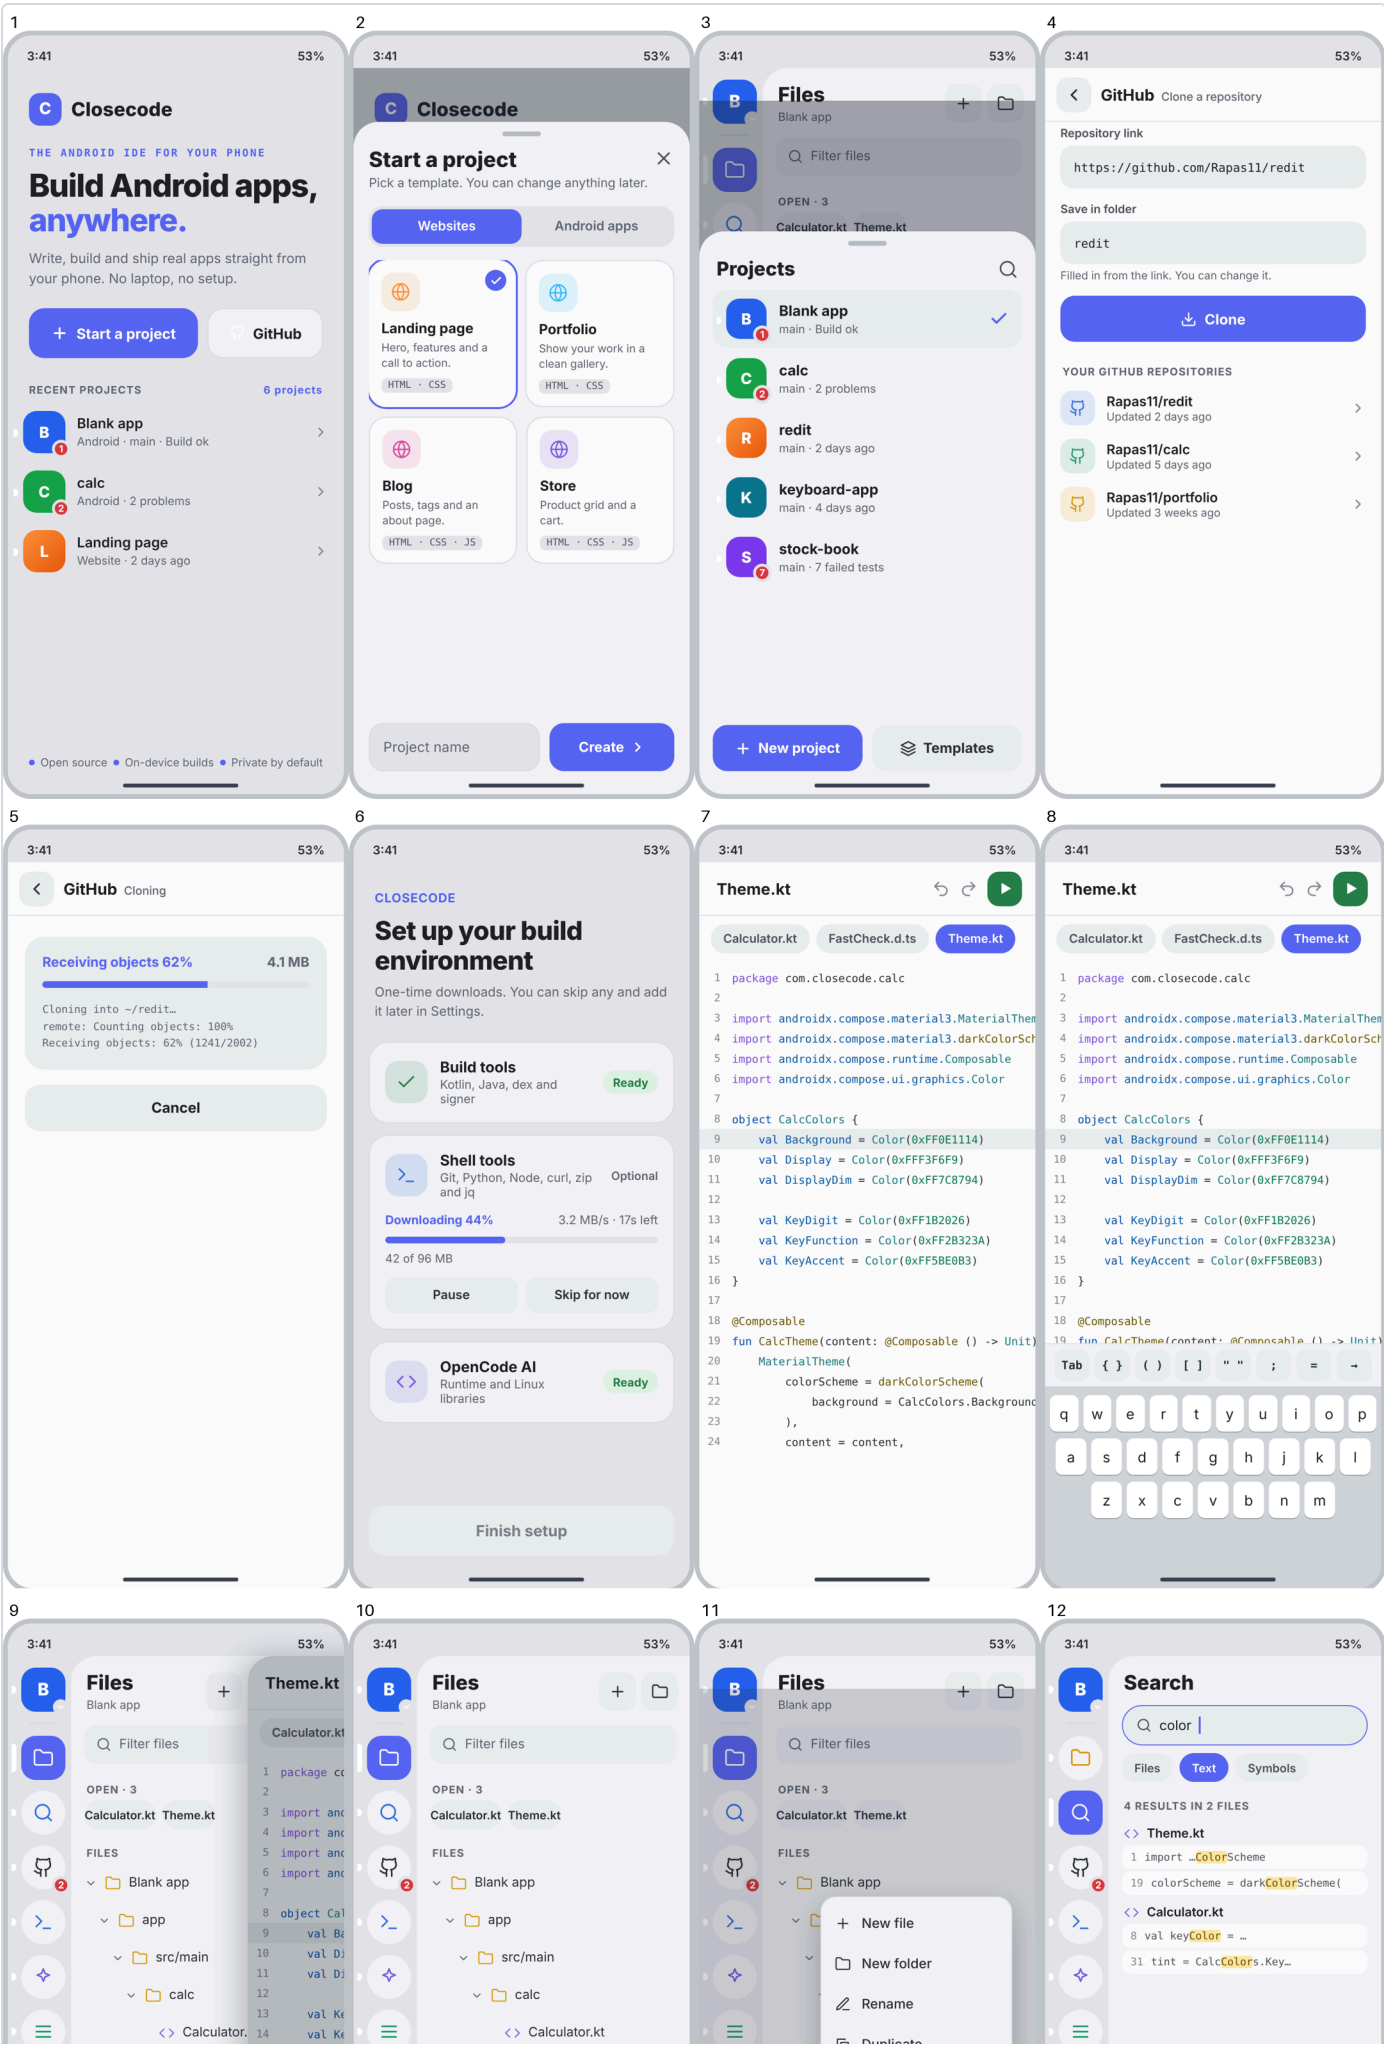

1
3:41
53%
Closecode
THE ANDROID IDE FOR YOUR PHONE
Build Android apps, anywhere.
Write, build and ship real apps straight from your phone. No laptop, no setup.
Start a project
GitHub
RECENT PROJECTS
6 projects
Blank app
Android · main · Build ok
calc
Android · 2 problems
Landing page
Website · 2 days ago
Open source
On-device builds
Private by default
2
3:41
53%
Closecode
Start a project
Pick a template. You can change anything later.
Websites
Android apps
Landing page
Hero, features and a call to action.
HTML · CSS
Portfolio
Show your work in a clean gallery.
HTML · CSS
Blog
Posts, tags and an about page.
HTML · CSS · JS
Store
Product grid and a cart.
HTML · CSS · JS
Project name
Create
3
3:41
53%
Files
Blank app
Filter files
OPEN · 3
Calculator.kt Theme.kt
Projects
Blank app
main · Build ok
calc
main · 2 problems
redit
main · 2 days ago
keyboard-app
main · 4 days ago
stock-book
main · 7 failed tests
New project
Templates
4
3:41
53%
GitHub Clone a repository
Repository link
https://github.com/Rapas11/redit
Save in folder
redit
Filled in from the link. You can change it.
Clone
YOUR GITHUB REPOSITORIES
Rapas11/redit
Updated 2 days ago
Rapas11/calc
Updated 5 days ago
Rapas11/portfolio
Updated 3 weeks ago
5
3:41
53%
GitHub Cloning
Receiving objects 62%
4.1 MB
Cloning into ~/redit…
remote: Counting objects: 100%
Receiving objects: 62% (1241/2002)
Cancel
6
3:41
53%
CLOSECODE
Set up your build environment
One-time downloads. You can skip any and add it later in Settings.
Build tools
Kotlin, Java, dex and signer
Ready
Shell tools
Git, Python, Node, curl, zip and jq
Optional
Downloading 44%
3.2 MB/s · 17s left
42 of 96 MB
Pause
Skip for now
OpenCode AI
Runtime and Linux libraries
Ready
Finish setup
7
3:41
53%
Theme.kt
Calculator.kt
FastCheck.d.ts
Theme.kt
package com.closecode.calc
import androidx.compose.material3.MaterialTheme
import androidx.compose.material3.darkColorScheme
import androidx.compose.runtime.Composable
import androidx.compose.ui.graphics.Color
object CalcColors {
val Background = Color(0xFF0E1114)
val Display = Color(0xFFF3F6F9)
val DisplayDim = Color(0xFF7C8794)
val KeyDigit = Color(0xFF1B2026)
val KeyFunction = Color(0xFF2B323A)
val KeyAccent = Color(0xFF5BE0B3)
}
@Composable
fun CalcTheme(content: @Composable () -> Unit) {
MaterialTheme(
colorScheme = darkColorScheme(
background = CalcColors.Background
),
content = content,
8
3:41
53%
Theme.kt
Calculator.kt
FastCheck.d.ts
Theme.kt
Tab
{ }
( )
[ ]
" "
;
=
→
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
9
3:41
53%
Files
Blank app
Filter files
OPEN · 3
Calculator.kt Theme.kt
FILES
Blank app
app
src/main
calc
Calculator.
Theme.kt
Calculator.kt
10
3:41
53%
Files
Blank app
Filter files
OPEN · 3
Calculator.kt Theme.kt
FILES
Blank app
app
src/main
calc
Calculator.kt
11
3:41
53%
Files
Blank app
Filter files
OPEN · 3
Calculator.kt Theme.kt
FILES
Blank app
New file
New folder
Rename
12
3:41
53%
Search
color
Files
Text
Symbols
4 RESULTS IN 2 FILES
Theme.kt
1 import …ColorScheme
19 colorScheme = darkColorScheme(
Calculator.kt
8 val keyColor = …
31 tint = CalcColors.Key…

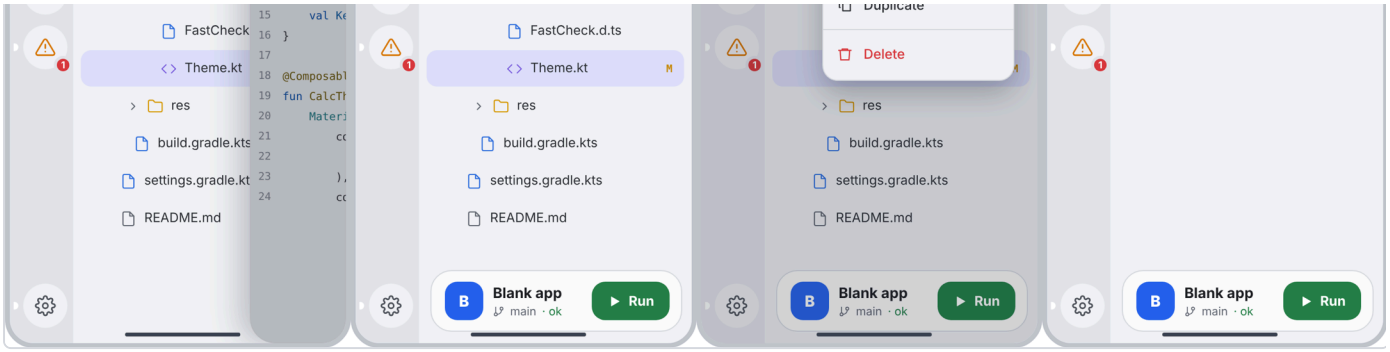
FastCheck
Theme.kt
res
build.gradle.kts
settings.gradle.kt
README.md
FastCheck.d.ts
Theme.kt
res
build.gradle.kts
settings.gradle.kts
README.md
Blank app
main · ok
Run
Delete
Blank app
main · ok
Run
Blank app
main · ok
Run


13

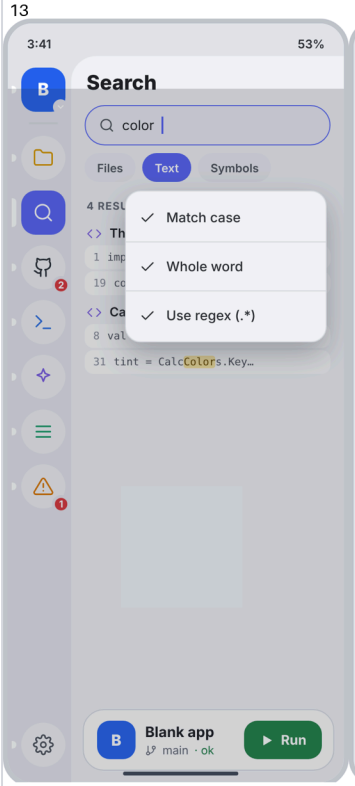


14

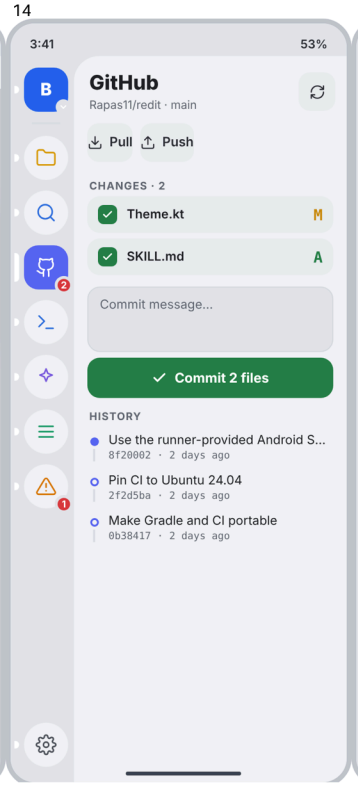


15

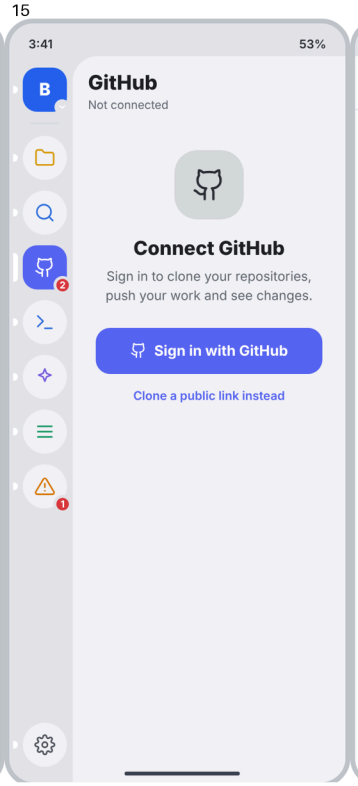


16

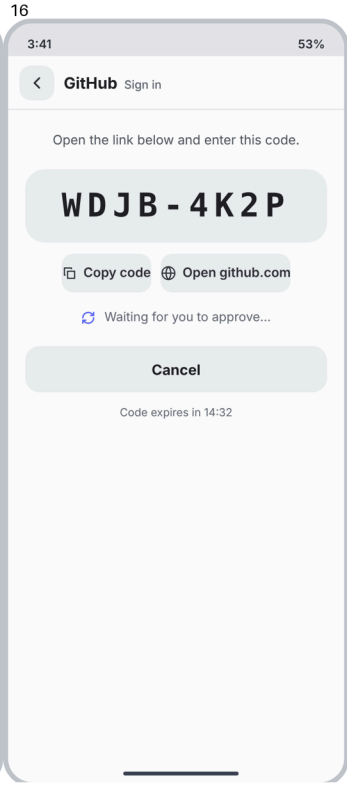


17

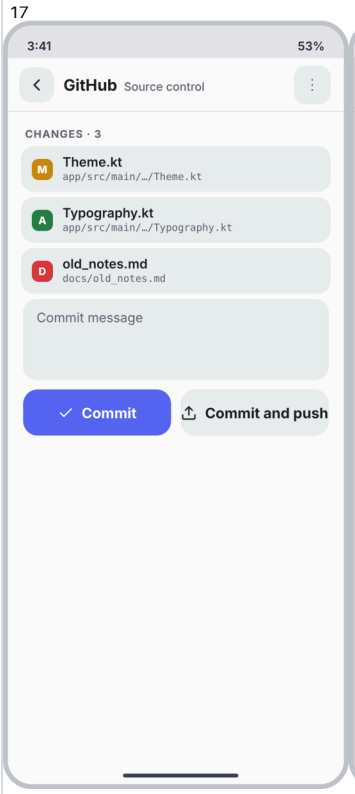


18

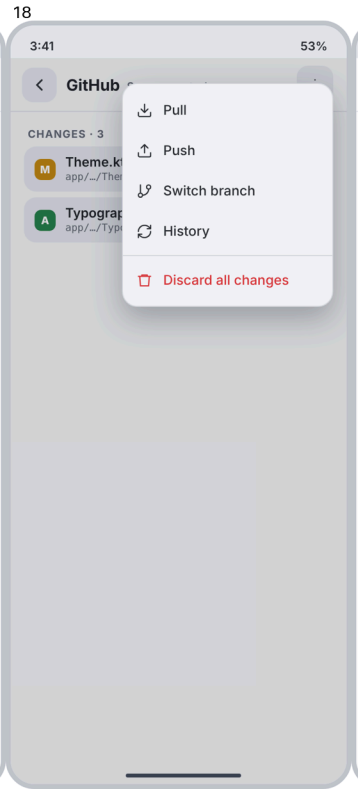


19

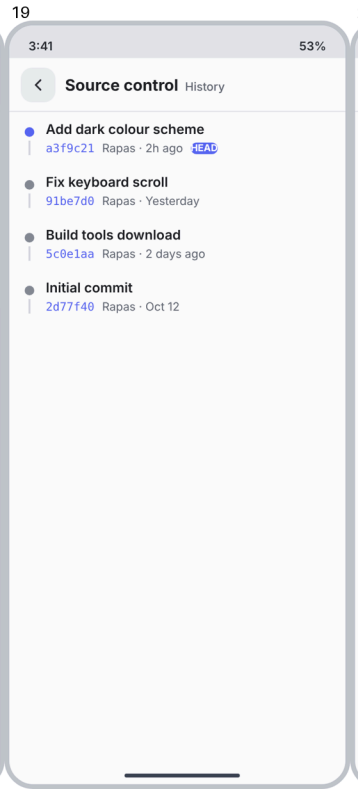


20

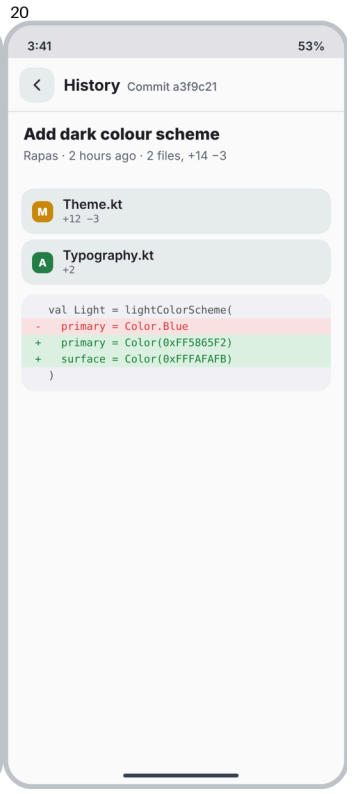


21

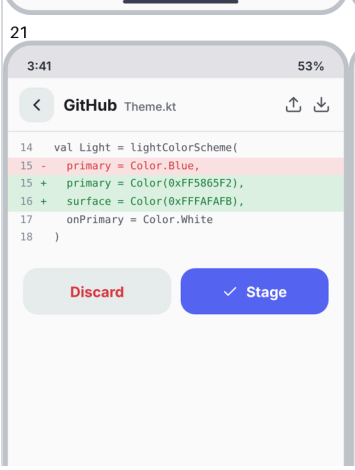


22

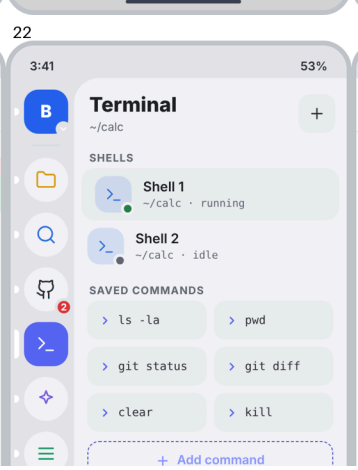


23

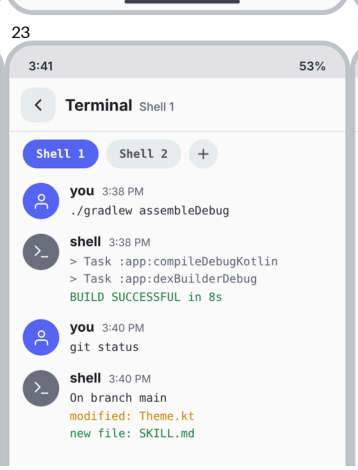


24

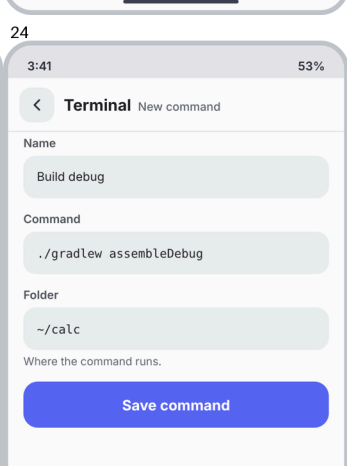


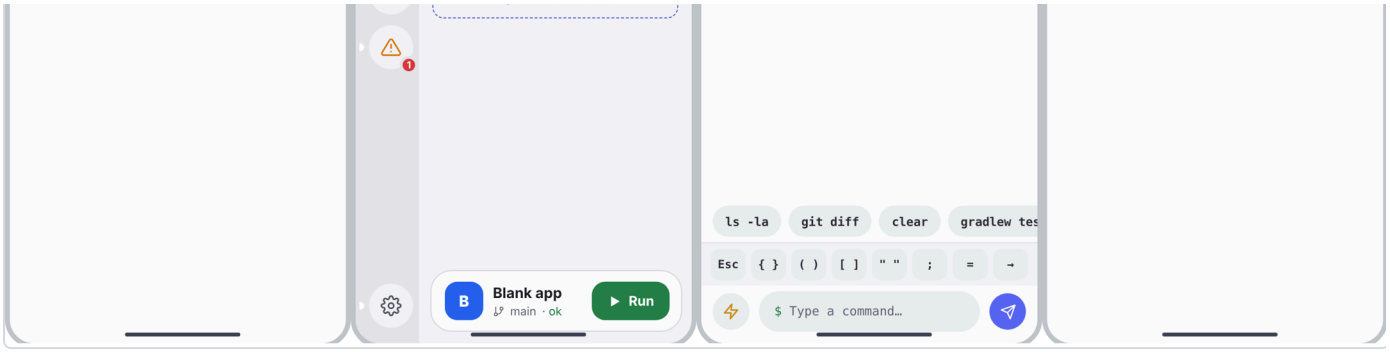
1
B
Blank app
main · ok
Run
ls -la
git diff
clear
gradlew tes
Esc
{ }
( )
[ ]
" "
;
=
→
$ Type a command…


25

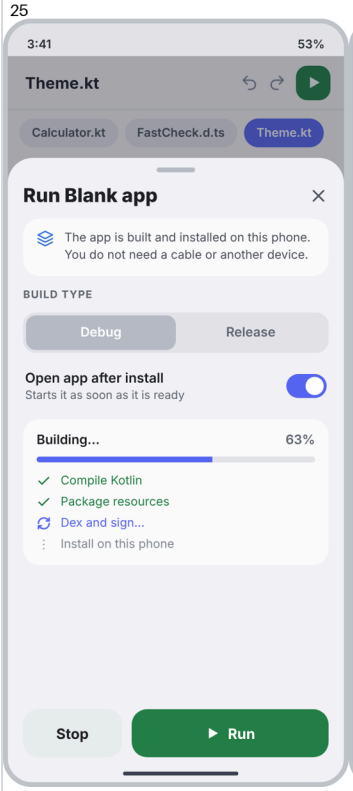


26

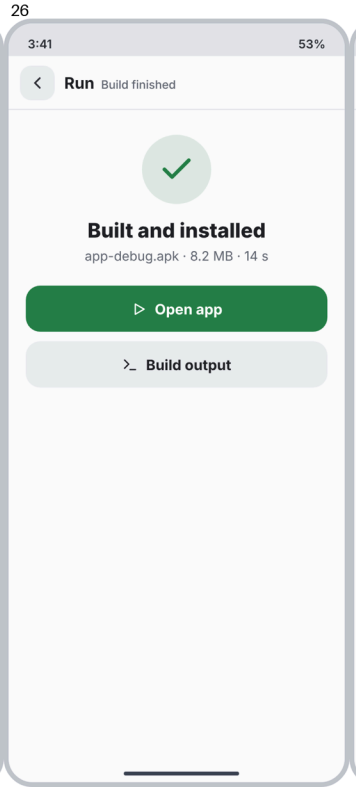


27

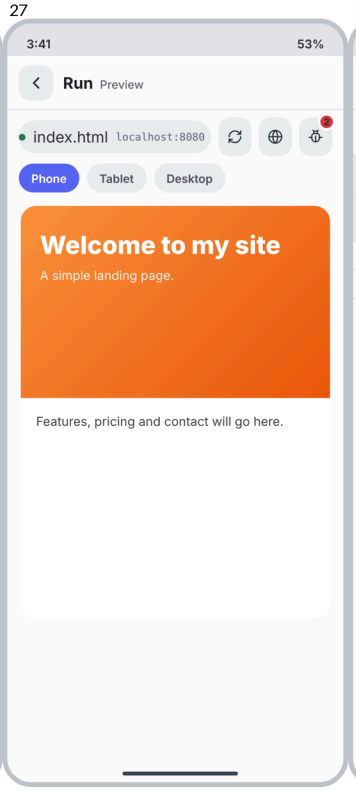


28

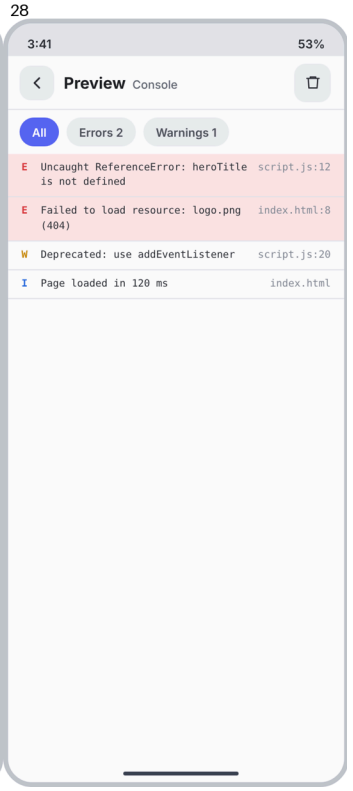


29

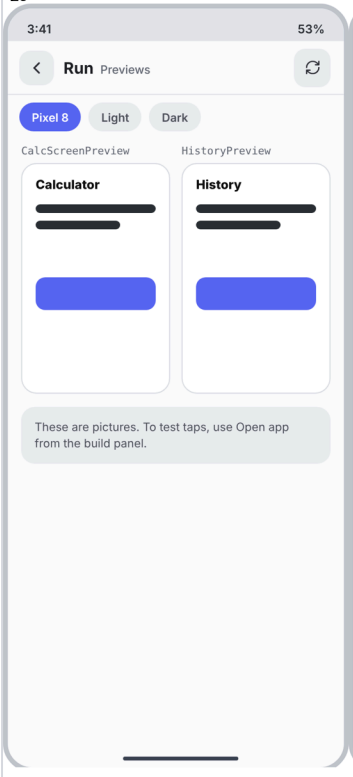


30

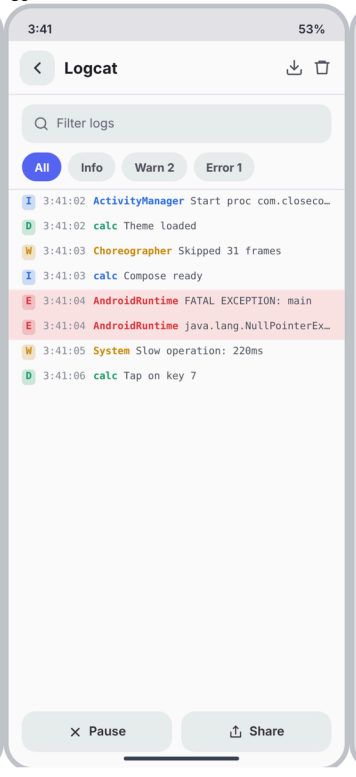


31

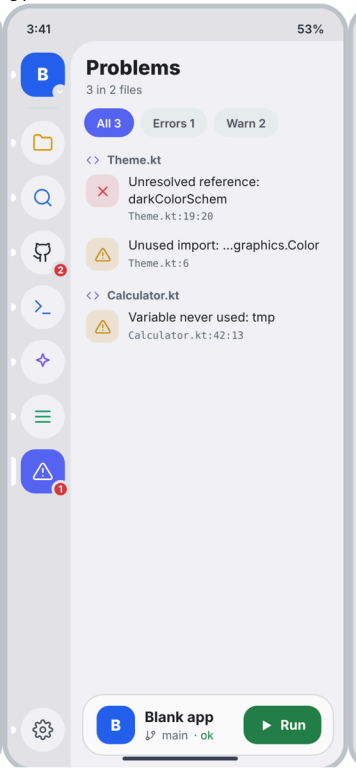


32

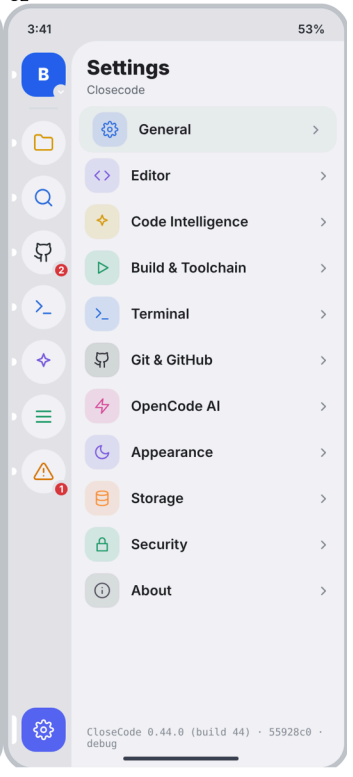


33

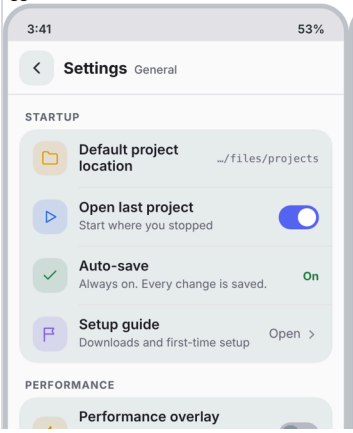


34

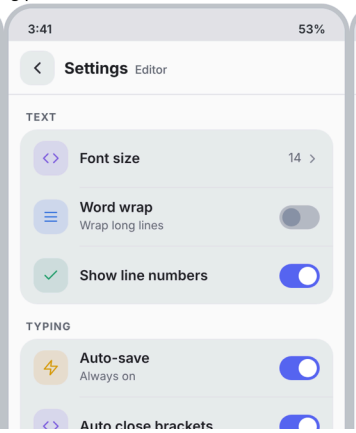


35

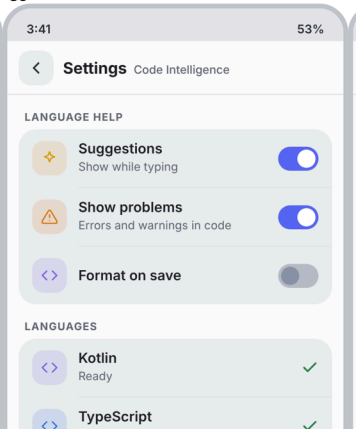


36

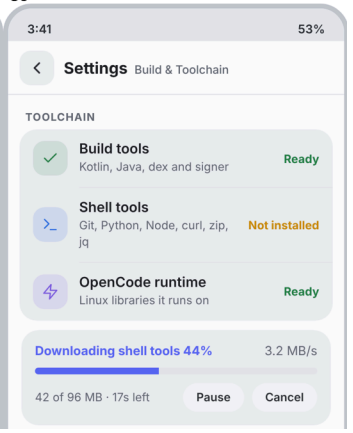


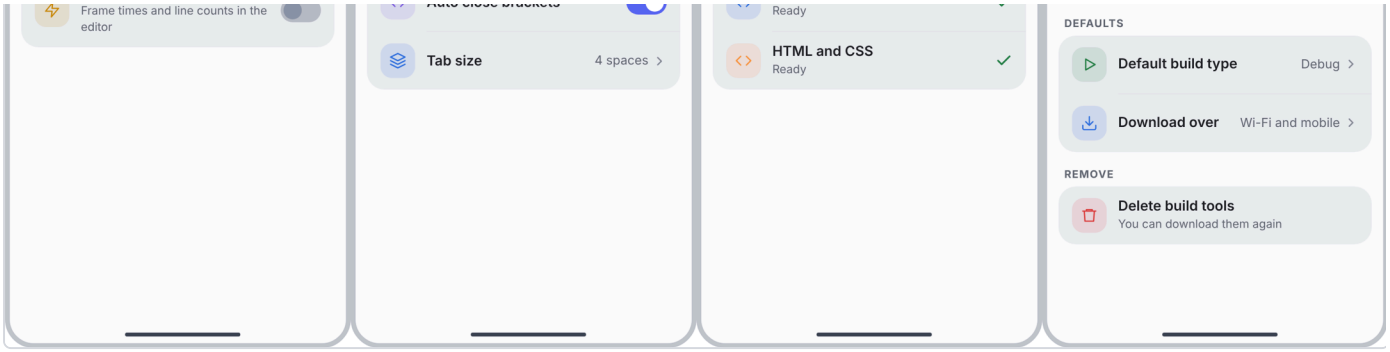
Frame times and line counts in the editor
Tab size
4 spaces
Ready
HTML and CSS
Ready
DEFAULTS
Default build type
Debug
Download over
Wi-Fi and mobile
REMOVE
Delete build tools
You can download them again


37

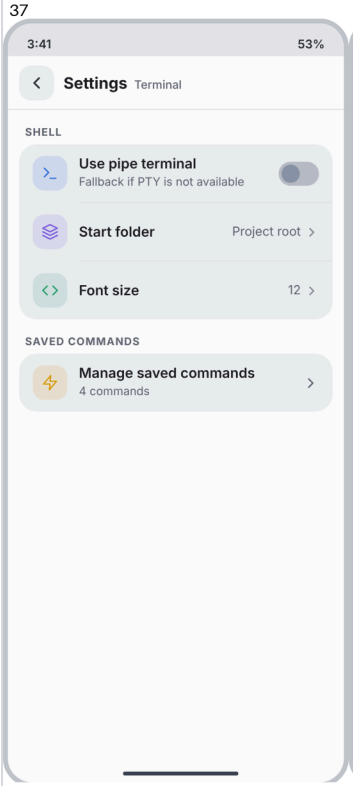


38

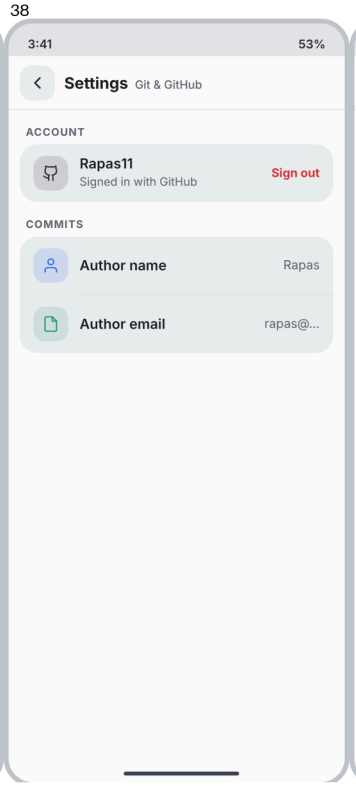


39

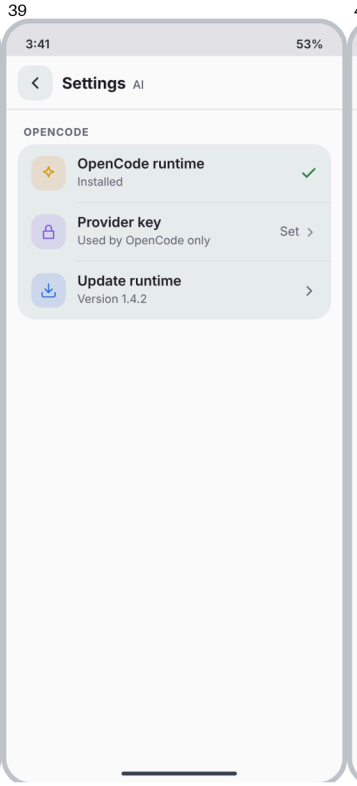


40

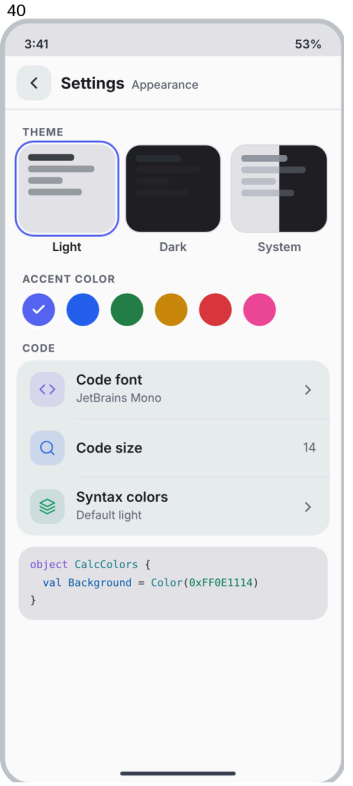


41

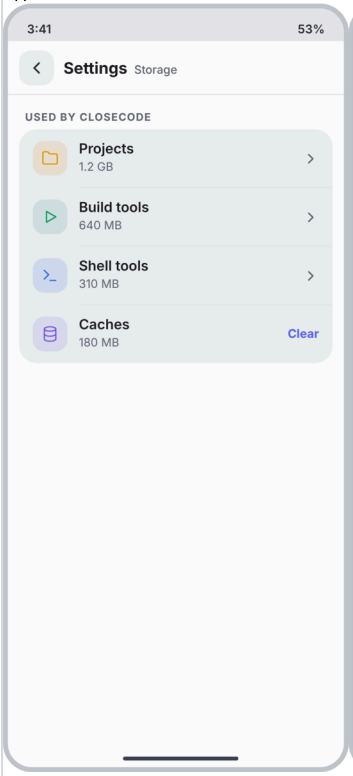


42

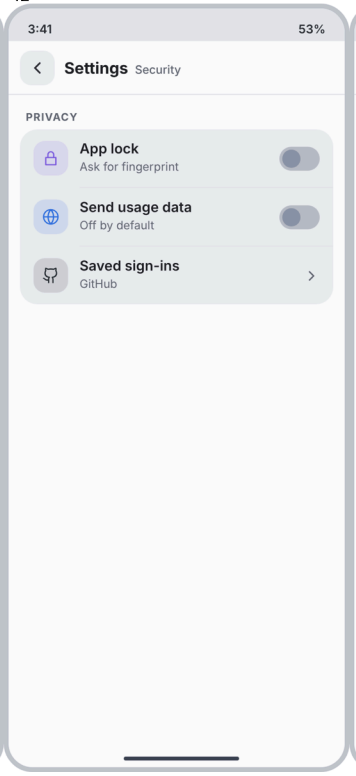


43

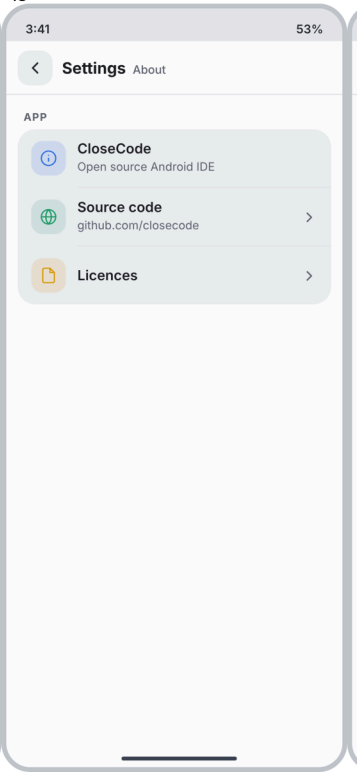


44

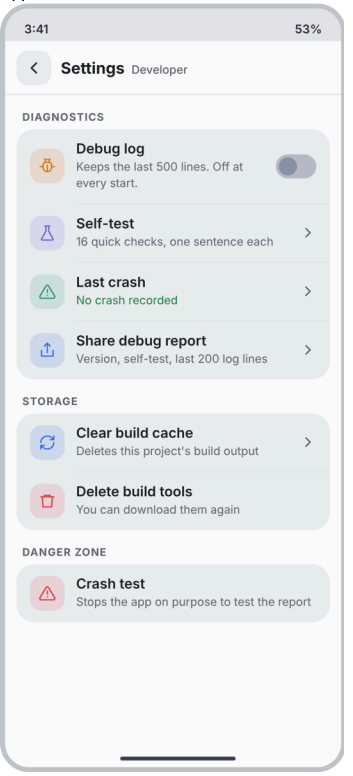


45

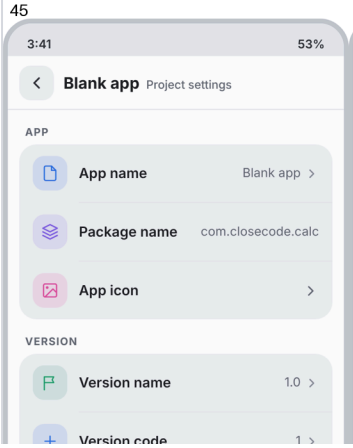


46

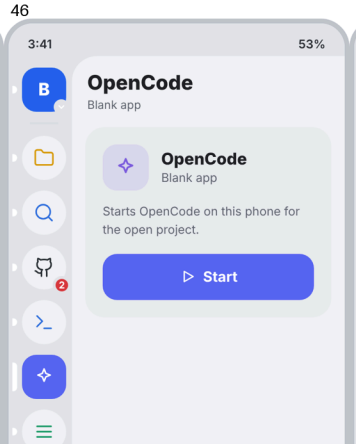


47

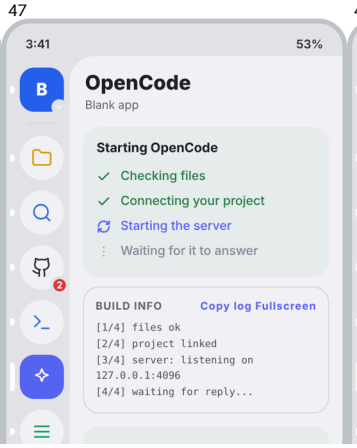


48

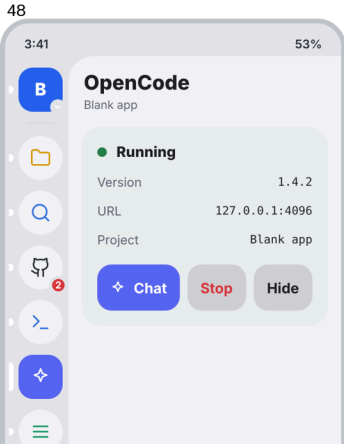


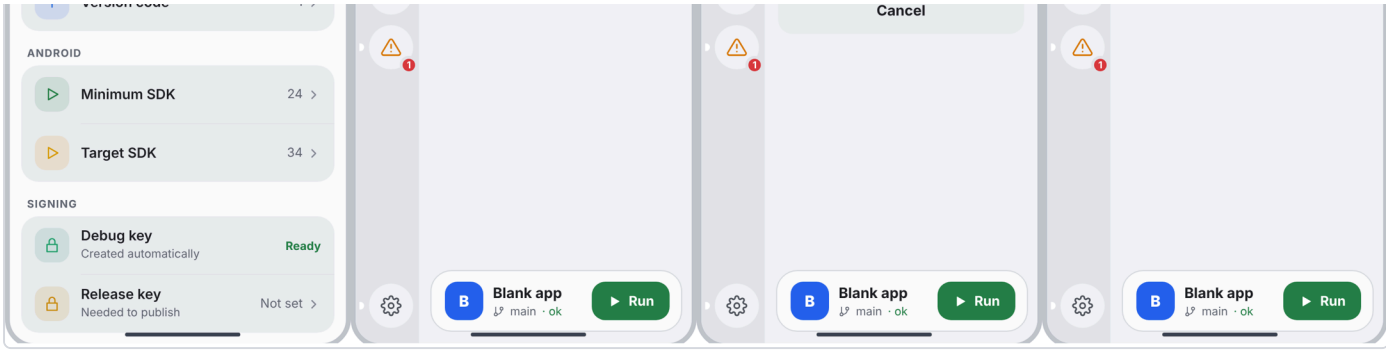
ANDROID
Minimum SDK
24
Target SDK
34
SIGNING
Debug key
Created automatically
Ready
Release key
Needed to publish
Not set
Cancel
B
Blank app
main · ok
Run
B
Blank app
main · ok
Run
B
Blank app
main · ok
Run

49

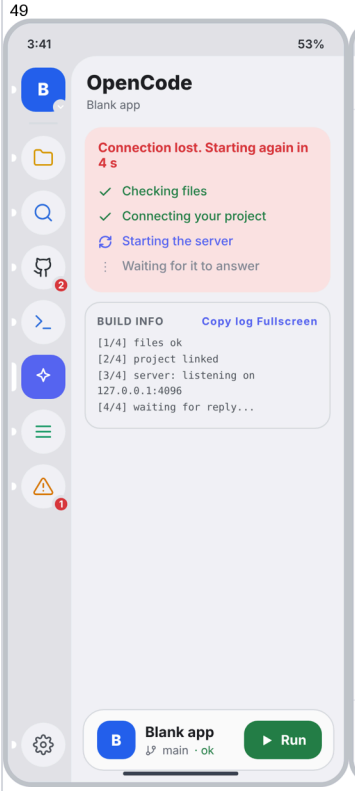
3:41
53%
B
OpenCode
Blank app
Connection lost. Starting again in 4 s
Checking files
Connecting your project
Starting the server
Waiting for it to answer
BUILD INFO
Copy log Fullscreen
[1/4] files ok
[2/4] project linked
[3/4] server: listening on 127.0.0.1:4096
[4/4] waiting for reply...
B
Blank app
main · ok
Run

50

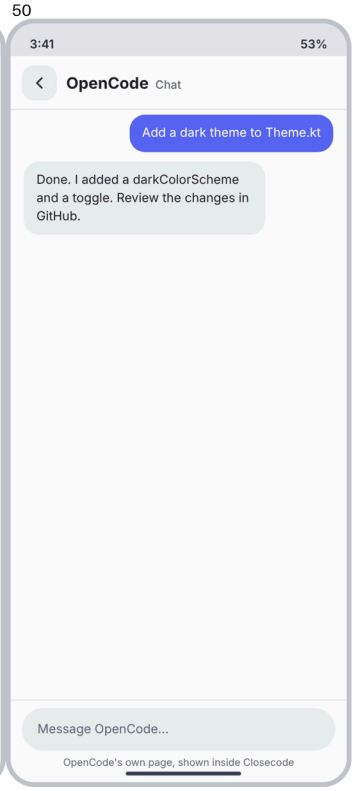
3:41
53%
OpenCode
Chat
Add a dark theme to Theme.kt
Done. I added a darkColorScheme and a toggle. Review the changes in GitHub.
Message OpenCode...
OpenCode's own page, shown inside Closecode

#	File	Screen	Back	Behaviour
1	01-welcome	Welcome	no	Name, "Build Android apps, anywhere.", Start a project and GitHub buttons, recent projects, Open source / On-device builds / Private by default.
2	02-start-project	Start a project	sheet	Tabs Websites and Android apps, template cards, project name, Create.
3	03-switch-project	Switch project	sheet	Tap the avatar at the top of the rail. List with build state badges, New project, Templates.
4	04-clone-repository	Clone a repository	yes	Paste link or pick a repo. Folder name fills in from the link. Existing folder = red line and Clone disabled.
5	05-cloning-progress	Cloning	yes	Progress bar, log lines, Cancel.
6	06-first-time-setup	First-time setup	no	Build tools, shell tools (optional), OpenCode runtime. Each shows Ready or a download bar with speed and time left. Pause and Skip for now.
7	07-editor	Editor	no	File chips, undo and redo, green Run button. No Save. Opens project on last file.
8	08-editor-keyboard	Editor with keyboard	no	Key row above the keyboard: Tab { } ( ) [ ] " " ; = →. Lines never cut at the left edge; scroll snaps to whole characters.
9	09-swipe-sidebar	Swipe peek	no	Editor slides right, sidebar underneath. Tap editor or swipe back to close.
10	10-files	Files	root	Filter, open files, tree with M/A/D marks, new file and new folder buttons.
11	11-files-menu	File long-press menu	menu	New file, New folder, Rename, Duplicate, Delete (red).
12	12-search	Search	root	Text field, tabs Files / Text / Symbols, results grouped by file with highlighted match.
13	13-search-options	Search options	menu	Match case, Whole word, Use regex. Checked items show a tick.
14	14-github	GitHub (connected)	root	Repo and branch, Pull, Push, changes with tick boxes, commit message, Commit, recent history.
15	15-github-not-connected	GitHub (not connected)	root	Sign in with GitHub, or clone a public link.
16	16-github-sign-in	GitHub sign-in	yes	Device Flow: show code, Copy code, Open github.com, waits for approval, code expiry timer.
17	17-source-control	Source control	yes	Changes list, message, Commit, Commit and push.
18	18-source-control-more	Source control menu	menu	Pull, Push, Switch branch, History, Discard all (red).
19	19-history	History	yes	Commit list with HEAD tag. Tap a commit for detail.
20	20-commit-detail	Commit detail	yes	Message, author, time, changed files, diff preview.
21	21-diff	Diff view	yes	Added lines green, removed lines red, line numbers, Discard and Stage. Up and down arrows jump between changes.
22	22-terminal	Terminal (sidebar)	root	Shell list with running dots, saved commands grid, Add command.
23	23-terminal-session	Terminal session	yes	Shell tabs, output as messages, quick-command chips, key row, input.
24	24-terminal-new-command	New command	yes	Name, command, folder, Save command.
25	25-run-build	Run and build	sheet	Runs on this phone. Debug or Release, open app after install, progress with steps, Stop and Run.
26	26-build-finished	Build finished	yes	Built and installed, file size and time, Open app, Build output.
27	27-website-preview	Website preview	yes	Address pill with live dot, refresh, open in browser, console button with error count, Phone / Tablet / Desktop.

#	File	Screen	Back	Behaviour
28	28-console	Console	yes	Filters All / Errors / Warnings, lines with file and line number, clear.
29	29-compose-previews	Compose previews	yes	Pictures of every @Preview, device and light or dark chips. Static images; use Open app to test taps.
30	30-logcat	Logcat	root	Filter field, level chips, colour-coded lines, Pause and Share.
31	31-problems	Problems	root	Count chips, grouped by file, tap to jump to the line.
32	32-settings	Settings categories	root	General, Editor, Code Intelligence, Build and Toolchain, Terminal, Git and GitHub, OpenCode AI, Appearance, Storage, Security, About. Version line at bottom.
33	33-settings-general	General	yes	Default project location, Open last project, Auto-save (always on), Setup guide, Performance overlay switch.
34	34-settings-editor	Editor	yes	Font size, word wrap, line numbers, auto close brackets, tab size.
35	35-settings-code-intelligence	Code Intelligence	yes	Suggestions, show problems, format on save, languages ready.
36	36-settings-build	Build and Toolchain	yes	Build tools, shell tools with download bar, default build type, download over, delete build tools.
37	37-settings-terminal	Terminal settings	yes	Pipe terminal fallback, start folder, font size, saved commands.
38	38-settings-github	Git and GitHub	yes	Account, sign out, author name and email.
39	39-settings-ai	OpenCode AI (setup only)	yes	Runtime installed, provider key, update. No chat in the app.
40	40-settings-appearance	Appearance	yes	Theme Light / Dark / System, accent colour, code font and size, syntax colours with preview.
41	41-settings-storage	Storage	yes	Space used by projects, tools and caches, Clear caches.
42	42-settings-security	Security	yes	App lock, usage data, saved sign-ins.
43	43-settings-about	About	yes	App info, source code, licences.
44	44-settings-developer	Developer	yes	Debug log, self-test, last crash, share debug report, clear build cache, crash test.
45	45-project-settings	Project settings	yes	App name, package name, icon, version, min and target SDK, signing keys.

Notes for the developer. "root" means the screen is the first screen of a rail tool, so it has no back chevron (system Back closes the sidebar). "sheet" and "menu" close with Back or a tap outside. The previous specs (Code Editor, App Screens, Screens Update, Part B) still define the detailed behaviour, sizes and build logic; this document changes the look and the navigation only.

Shared components


Build these once and reuse them on every screen. Sizes in dp, text in sp, on a 360 dp wide phone.

Component	Spec
Status bar	34 dp, colour rail (#E3E5EA), dark text.
Tool rail	66 dp wide, left padding 14. Items are 46 dp rounded squares (radius 15), 11 dp apart. Unselected: panel colour (#F1F2F5) circle-ish (radius 23) with a coloured line icon (22 dp, stroke 1.8). Selected: blurple square (radius 15) with white icon and a white pill on the left edge (5 by 30 dp). Red count badge (19 dp, white 3 dp ring) at bottom right for GitHub changes and Problems. Top item is the project avatar (blue rounded square with the project letter and a small down-chevron badge). Settings is pinned at the bottom with 16 dp margin. OpenCode (sparkle icon, purple) sits between Terminal and Logcat.
Side panel	Fills the rest of the width. Background #F1F2F5, top-left corner radius 26. Title 21 sp bold, sub line 12 sp muted, action buttons (38 dp, radius 12) at the right.
Run card	Floating at the bottom of the panel, 64 dp tall, radius 22, content colour with border. Left: 40 dp project avatar. Middle: project name 15 sp bold and a line "branch main - ok" (12 sp). Right: green Run button 40 dp tall, radius 14, play icon and label. Shown on Files, Search, Terminal and Problems panels.
Screen header (full screens)	56 dp tall, bottom border 1 dp. Back button first: 36 dp square, radius 12, field colour, chevron-left icon 20 dp stroke 2.2, 12 dp from the left edge. Title 16.5 sp bold, optional sub title 12 sp muted next to it, up to two 38 dp action buttons at the right. The editor header is the only one without a back button. The title shows where you came from (origin,

Component	Spec
	bold) and the current screen after it in muted text, for example Settings, then Appearance; see the header text table in Navigation rules.
List row	Min height 58 dp, padding 8 by 14. 42 dp icon tile (radius 13) tinted 13% of its colour, title 14.5 sp semi-bold, sub line 12.5 sp muted (one line, ellipsis), optional right badge or chevron. Selected row: field colour background, radius 14, 8 dp side margin.
Settings group	Section label (11 sp uppercase) then a card with radius 18, field colour. Rows 36 dp tile + title 14.5 sp + sub 12 sp. Dividers start 62 dp from the left. Right side holds a value with chevron, a toggle, a tick, or a status word (Ready green, Not installed amber).
Toggle	42 by 25 dp pill. Off: #B8BCC5 with white knob. On: blurple with knob at the right.
Primary button	48 dp tall, radius 15, blurple, white 15 sp bold text, optional 17 dp icon. Success buttons (Run, Open app) use green. Secondary: field colour with dark text. Destructive text: red. Disabled: field colour with muted text.
Chip	30 dp tall pill, 13 dp side padding, 12 sp semi-bold. Selected: blurple with white text. Unselected: field colour with muted dark text.
Segmented control	Track radius 13, 3 dp padding, field colour darker. Each segment 34 dp tall, radius 10. Selected segment #B8BCC5 or white with shadow.
Text field	44 dp tall, radius 13, field colour, 14 dp padding, 12.5 sp. Mono for links, commands and paths. Label 12 sp semi-bold above. Focus ring: 1.5 dp blurple.
Bottom sheet	Top corners radius 26, panel colour, grab handle 40 by 5 dp, title 19 sp bold. The area behind is dimmed (ink at 30%). Close with swipe down, Back or tap outside.
Popup menu	Width 200 to 220, radius 16, panel colour, 1 dp border, shadow. Rows 42 dp tall with 17 dp icon and 14 sp text. Divider 1 dp. Destructive row in red.
Progress bar	6 to 7 dp tall, radius 4, track field colour, fill blurple. Percent and speed text above it, 12.5 sp.
Code font	JetBrains Mono, 11.5 sp, line height 21 dp, line numbers 11 sp muted, current line field colour.
Syntax colours (light)	keyword #8250DF, type #1B7C83, string #A5461D, function #6F5A00, number #0A7D4F, comment #5E7F46, variable #0A5EA8.


Screens 1 to 6: start, projects, setup

1. Welcome

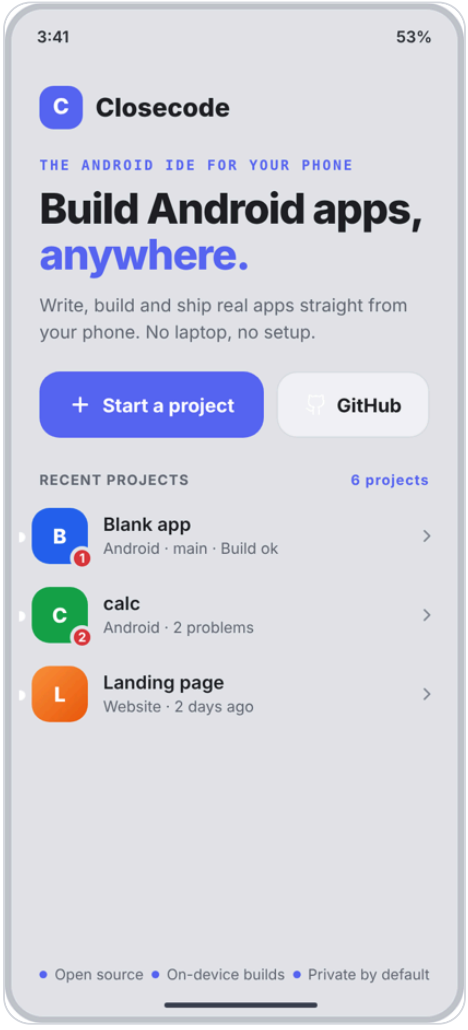


Shown when no project is open. Top: app logo tile and the name "Closecode". Small blurple label "THE ANDROID IDE FOR YOUR PHONE" (11 sp, letter spacing 1.6). Headline "Build Android apps, anywhere." 33 sp extra bold, with "anywhere." in blurple. Sub text: "Write, build and ship real apps straight from your phone. No laptop, no setup." Two buttons, 52 dp tall: **Start a project** (blurple, plus icon, opens screen 2) and **GitHub** (secondary, opens GitHub sign-in or Clone). "RECENT PROJECTS" list with a count on the right; each row has the project tile, name, "Android - main - Build ok" and a red badge for problems. Footer: Open source, On-device builds, Private by default. Back exits the app.

2. Start a project

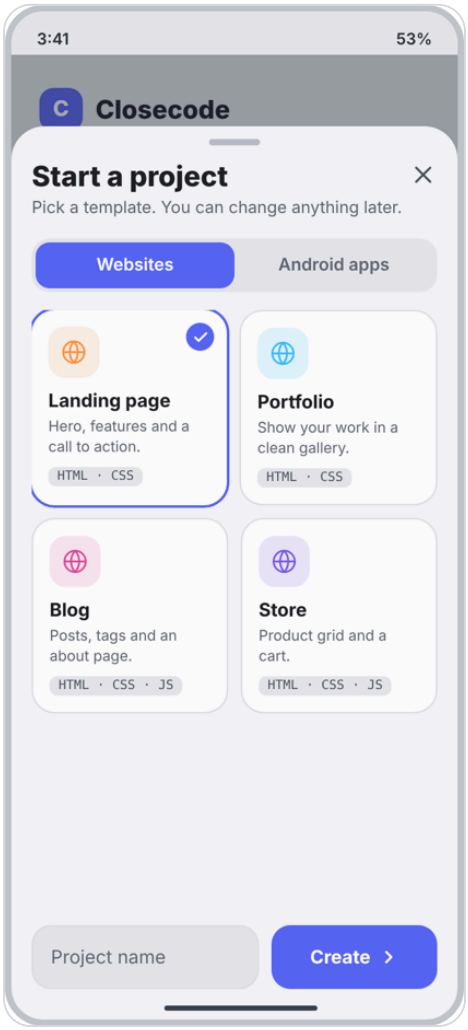


Bottom sheet over the welcome screen. Title "Start a project", sub text "Pick a template. You can change it later.", close X at the right. Segmented control: **Websites** and **Android apps**. Websites: Landing page, Portfolio, Blog, Store (two per row, each card shows icon tile, name, one line, and tags such as HTML, CSS, JS). Android apps shows the Android templates (Blank app, Compose app, and so on). The chosen card has a blurple outline and a tick. Bottom row: project name field and **Create**. Create is disabled until the name is valid (letters, numbers, dash, underscore). On Create the project opens in the editor.

3. Switch project

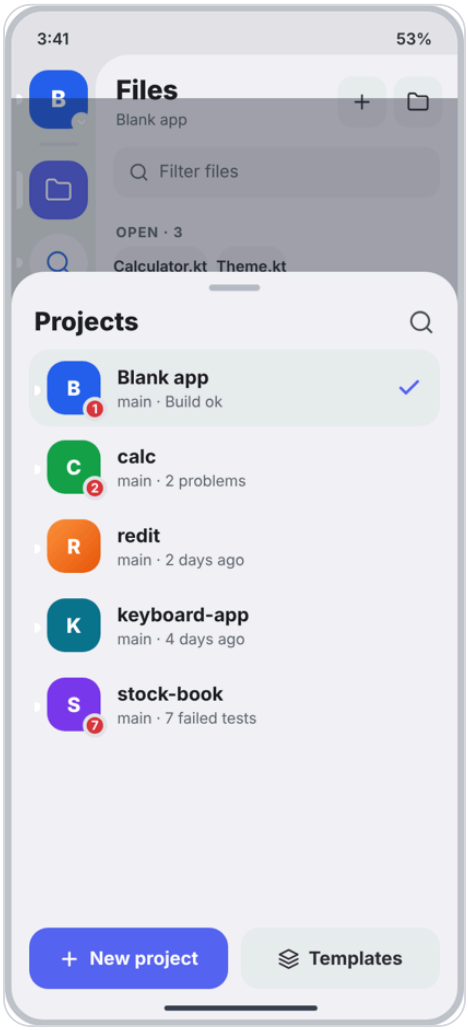


Bottom sheet over the Files panel, opened by tapping the avatar at the top of the rail. Title "Projects" with a search icon. Rows: 42 dp tile with letter, name, "main - Build ok" or "7 failed tests", red badge, tick on the open project. Bottom buttons: **New project** (blurple, opens screen 2) and **Templates** (secondary). Long-press a row for Rename, Duplicate, Delete.

4. Clone a repository

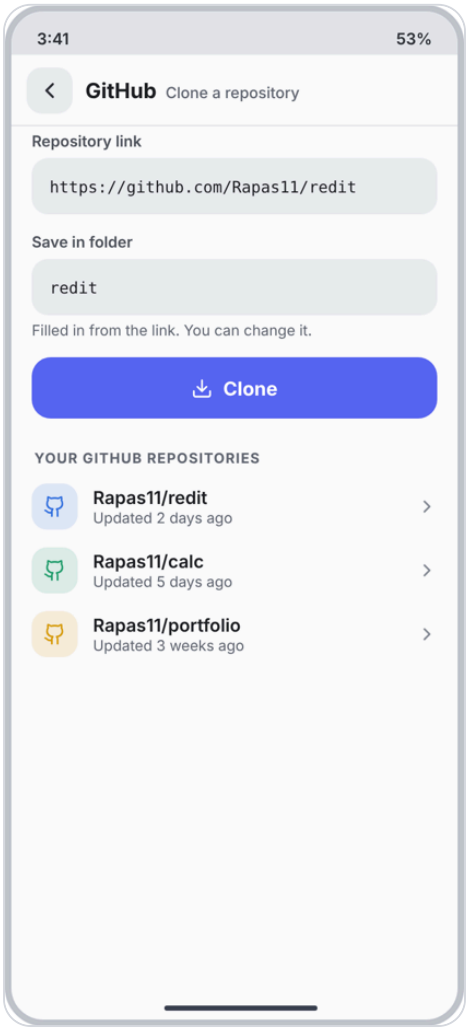


Full screen with back. Title "Clone a repository", sub "Paste a link, or pick one". Field **Repository link** (mono, placeholder https://github.com/owner/repository, Paste button inside the right end). Field **Save in folder**: fills in from the link (last part without .git), editable. If the folder exists: red line "The folder already exists" and Clone stays disabled. **Clone** button (48 dp) is grey until the link is valid. Below: "YOUR GITHUB REPOSITORIES" list (name, updated time, chevron); tapping one fills both fields. If not signed in, the list is replaced by a Sign in with GitHub button.

5. Cloning progress

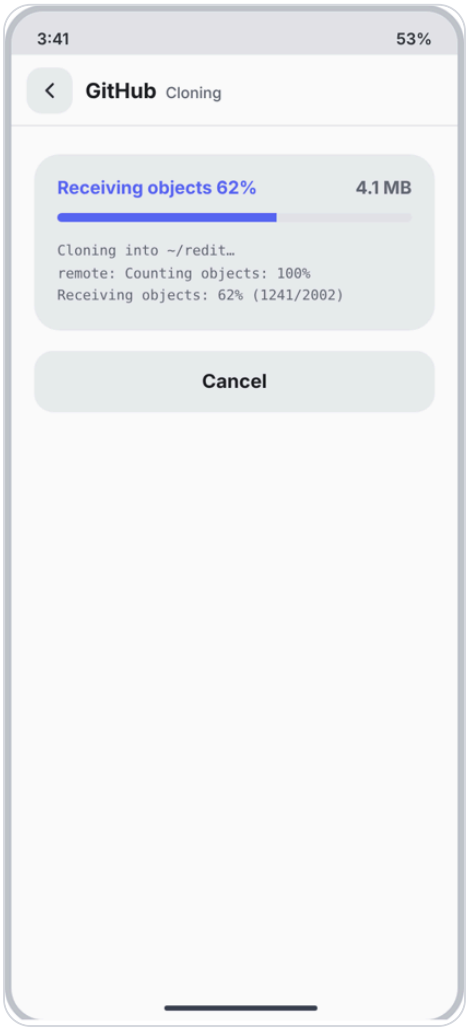

Full screen with back (back asks "Stop cloning?"). Card with the phase ("Receiving objects 62%"), size, progress bar and three log lines in mono. **Cancel** button removes the partial folder. On success the project opens in the editor; on failure the card turns red with the message and a Try again button.


6. First-time setup

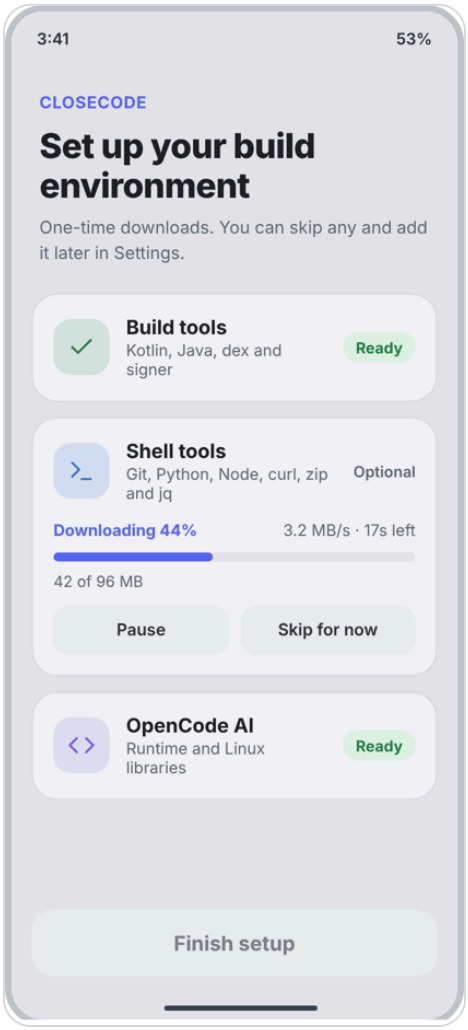

Shown once after install. Small blurple label CLOSECODE, title "Set up your build environment", sub text "One-time downloads. You can skip any and add it later in Settings." Three cards: **Build tools** (Kotlin, Java, dex and signer), **Shell tools** (Git, Python, Node, curl, zip and jq; optional), **OpenCode AI** (runtime and Linux libraries). Each card has an icon tile, title, one line, and a status: Ready (green pill), Optional, or a download bar with percent, speed and time left plus Pause and Skip for now. **Finish setup** is disabled until Build tools are ready. This screen has no back button; it is a one-time gate.


Screens 7 to 13: editor, sidebar, files, search

7. Editor

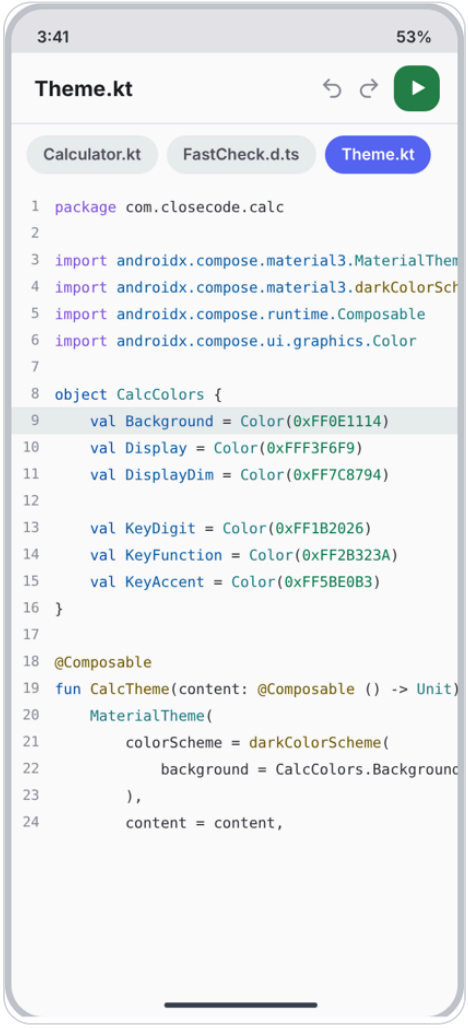


The home screen of an open project. Header (no back button): file name 16.5 sp bold, undo and redo (19 dp icons, muted when nothing to do), green **Run** button (36 dp square, radius 12). Under it, file chips for open files (scrolls sideways; the active file is blurple). Code area with line numbers, current line highlighted, light syntax colours. No Save button: files save by themselves 1 second after typing stops and when the app goes to the background. No menu button and no AI button. To open the sidebar, swipe right (screen 9). Tapping Run opens the Run sheet (screen 25) on first use, then starts the build.

8. Editor with keyboard

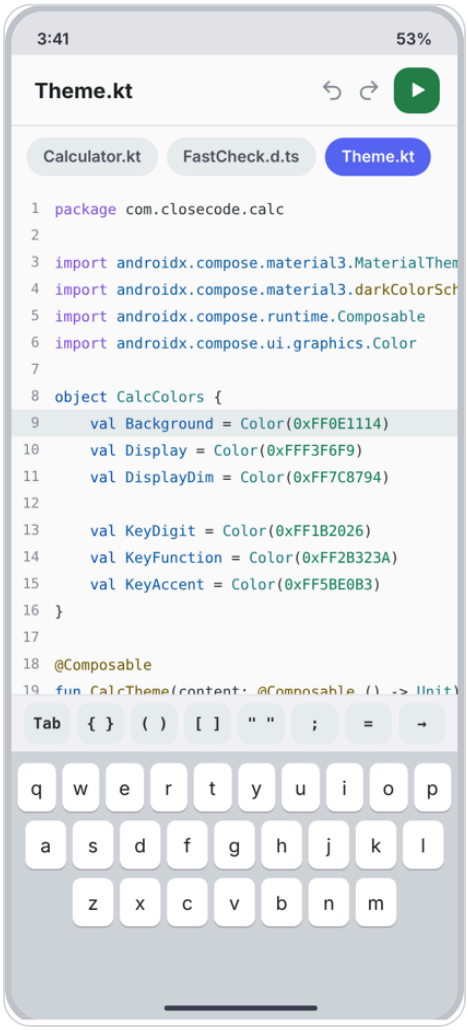


When the keyboard is open, a key row sits right above it: Tab, { }, ( ), [ ], " ", ;, =, arrow. Keys are 32 dp tall, radius 9, equal width. Rules carried over from the Screens Update Spec: the sideways scroll is always a whole number of characters so no half letter shows next to the line numbers; moving to a short line scrolls back to column 0 in 150 ms; typing at the end of a long line scrolls only as much as needed to show the cursor.

9. Swipe peek (sidebar opens)

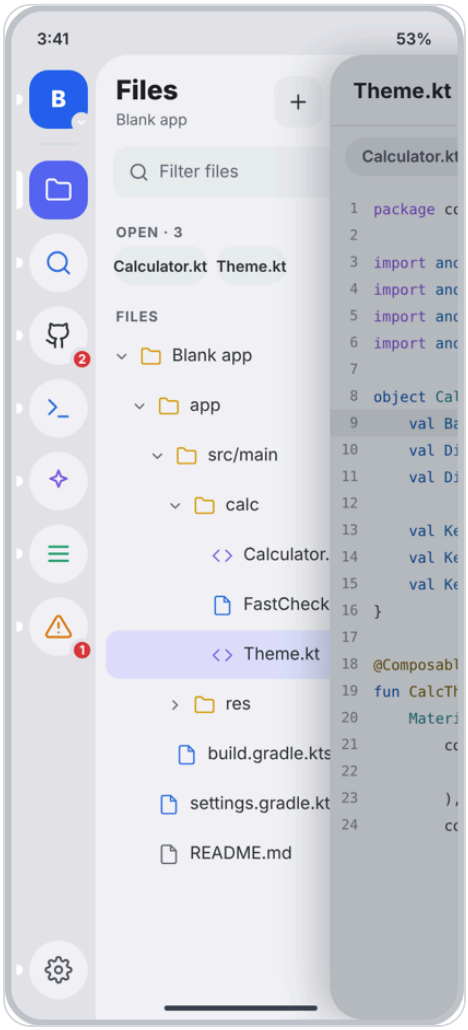


Swipe right from anywhere on the editor. The editor becomes a card with a rounded left edge (radius 26) that slides right by about 250 dp while a dark layer fades over it. The rail and panel appear underneath, showing the last used tool (Files by default). Release past 40% to keep it open, otherwise it snaps back. Tap the visible part of the editor, swipe left, or press Back to close. There is no button for this on purpose.

10. Files

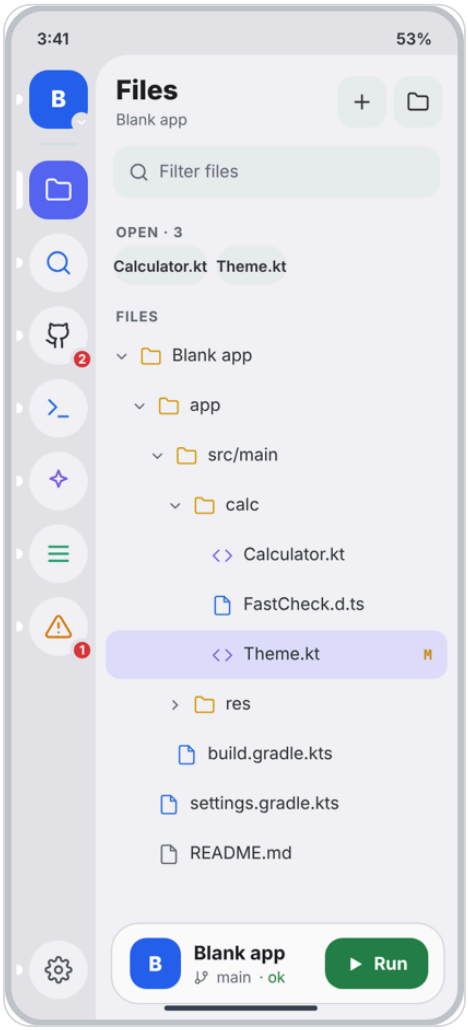


Panel title "Files", sub text is the project name, buttons: new file (+) and new folder. Filter field ("Filter files"). "OPEN - 3" chips for open files. Tree: folders with chevron and folder icon (yellow), files with type icon (Kotlin purple, TypeScript blue and so on). Rows are 38 dp tall, indent 16 dp per level, selected row highlighted in light blurple. Git marks at the right: M amber, A green, D red. Tap a file to open it and close the sidebar. Tap a folder to expand. Long-press opens the menu in screen 11. The Run card sits at the bottom.

11. File long-press menu

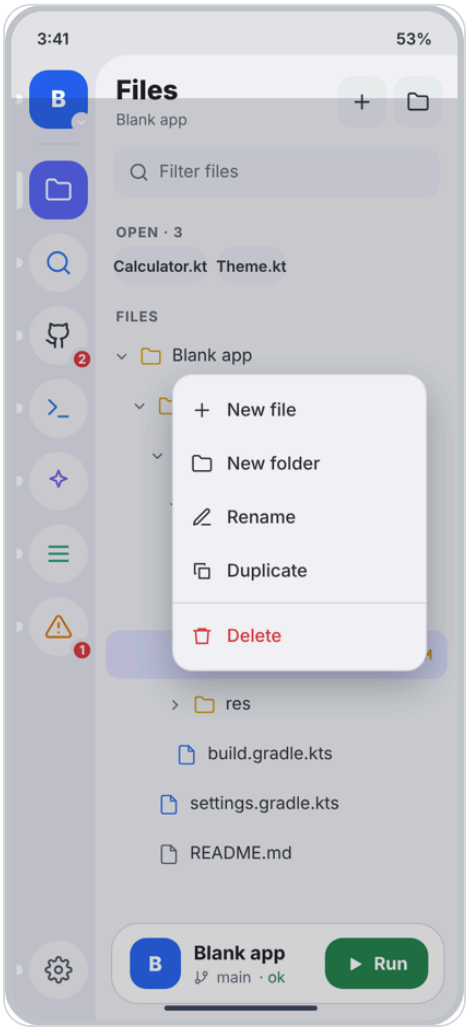


Popup menu next to the pressed row: New file, New folder, Rename, Duplicate, divider, Delete (red). Delete asks "Delete Theme.kt?" with Cancel and Delete. Rename turns the row into a text field. A file that is open and renamed keeps its tab.

12. Search

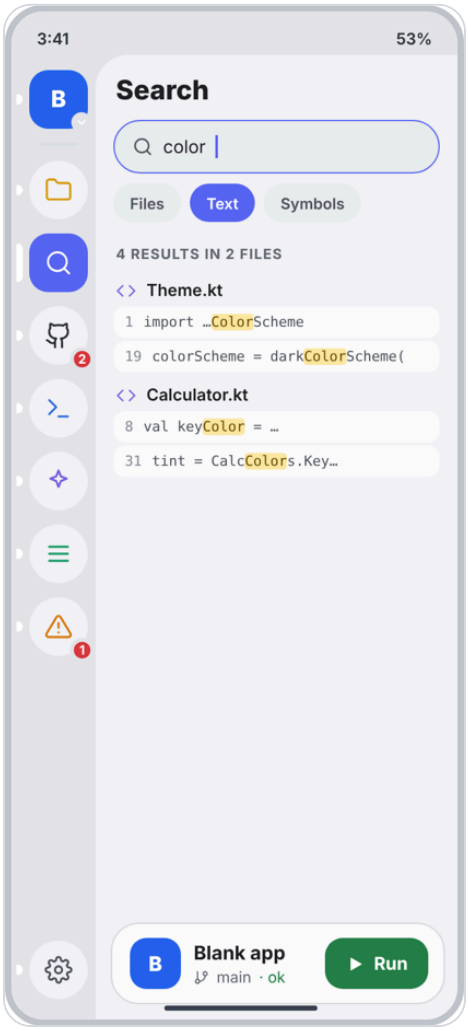

Panel title "Search". Text field 42 dp tall (pill) with a blurple focus ring. Chips: **Files** (file names), **Text** (inside files), **Symbols** (classes and functions). "4 RESULTS IN 2 FILES" label, then results grouped by file (code icon and file name), each match as a card with the line number and the line, the matched word highlighted (yellow #FBE7A1 with dark brown text). Tap a result to open the file at that line. The options menu is opened by a long-press on the search field's right end icon.


13. Search options

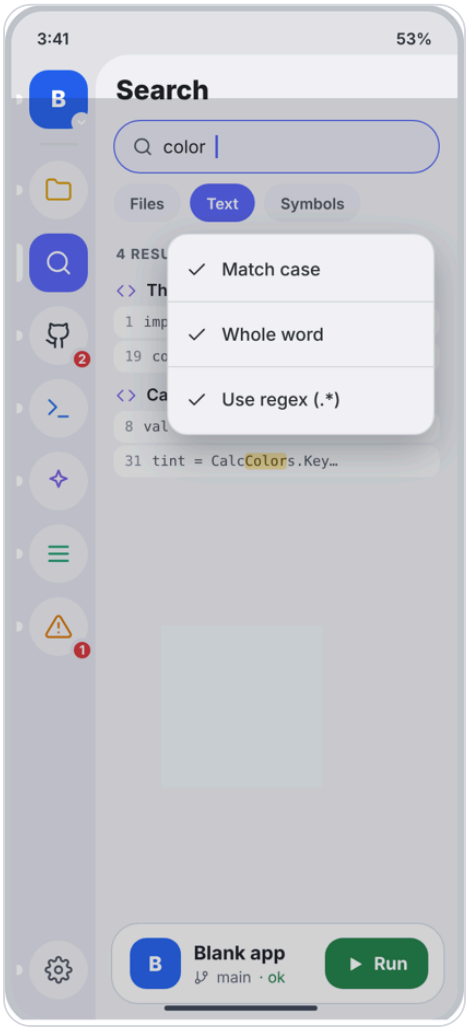

Popup menu with three checkable items: **Match case**, **Whole word**, **Use regex (.*)**. A tick shows when on. The choice is remembered. Changing an option reruns the search at once.


Screens 14 to 21: GitHub, source control, history, diff

14. GitHub (connected)

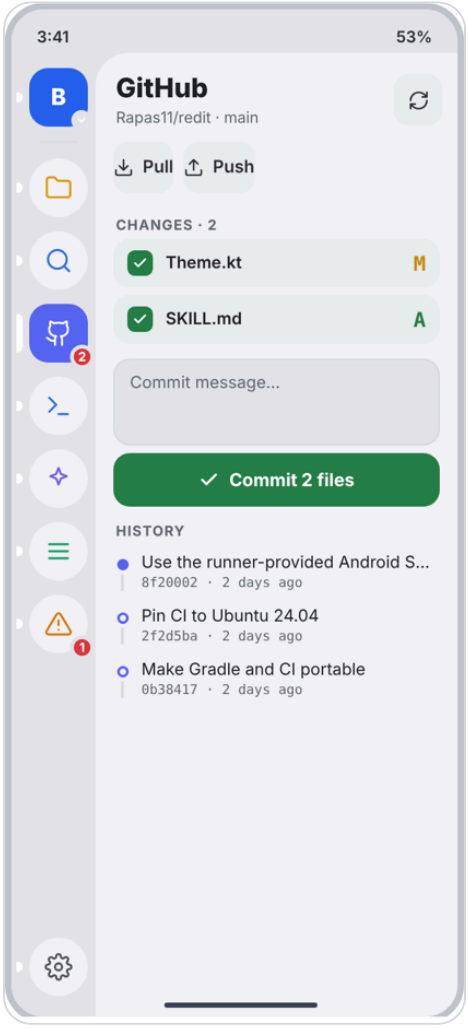


Rail tool GitHub (red badge = number of changed files). Title "GitHub", sub "owner/repo - main", refresh button. Buttons **Pull** and **Push**. "CHANGES - 2" list: tick box, file name, status letter (M amber, A green, D red). Tap a file to open its diff (screen 21). Commit message field and a green **Commit 2 files** button (disabled when nothing is ticked or the message is empty). "HISTORY" shows the last commits with a graph dot (blurple = HEAD), message, short hash and time. A "See all" row opens Source control (screen 17).

15. GitHub (not connected)

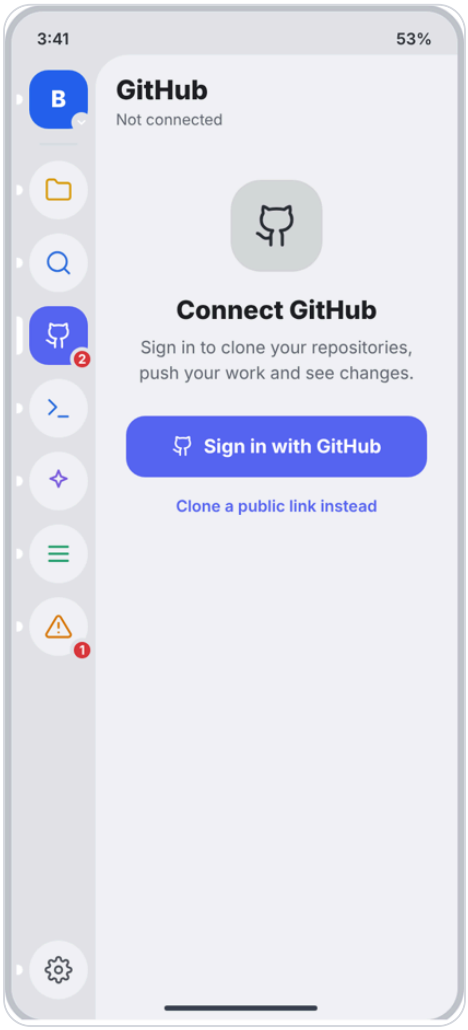


Centred card: GitHub icon tile, "Connect GitHub", "Sign in to clone your repositories, push your work and see changes." **Sign in with GitHub** opens screen 16. Link "Clone a public link instead" opens screen 4.

16. GitHub sign-in

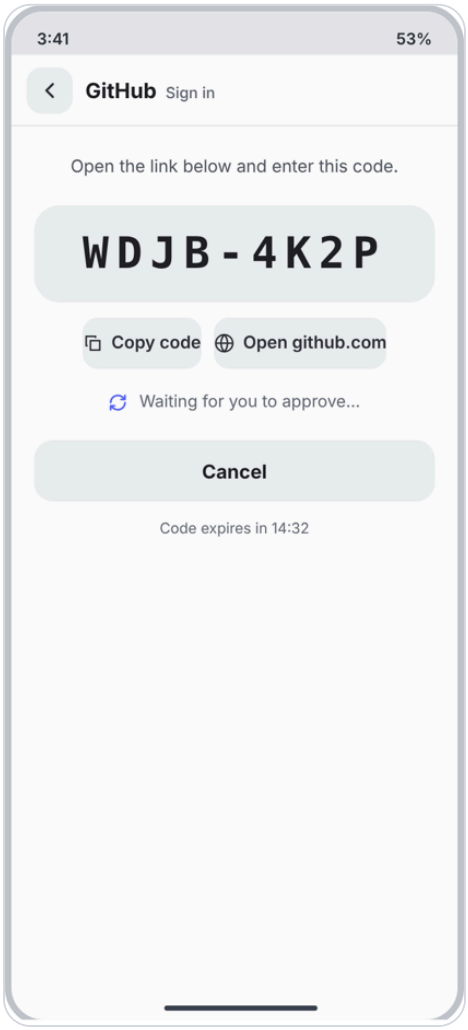


Device Flow. Back cancels the sign-in. Shows the 8-character code (mono 34 sp, letter spacing 6) in a card, buttons **Copy code** and **Open github.com** (opens the browser at github.com/login/device). Line "Waiting for you to approve..." with a spinning icon. **Cancel** button. Small text "Code expires in 14:32" counts down. Polls GitHub at the interval GitHub returns. On success returns to the GitHub panel with the account name; on expiry shows "Code expired" and a Get a new code button.

17. Source control

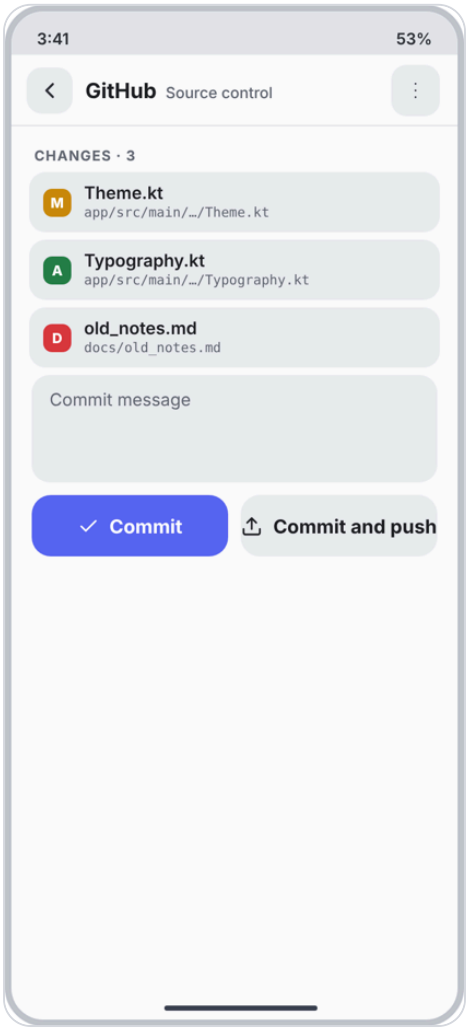


Full screen with back. Title "Source control", sub = branch, more button (three dots) opens screen 18. "CHANGES - 3" rows with letter tile, file name and path in mono. Commit message box (84 dp). Two buttons: **Commit** (blurple) and **Commit and push** (secondary). Tap a row for the diff. Swipe a row left to discard that file (asks first).

18. Source control menu

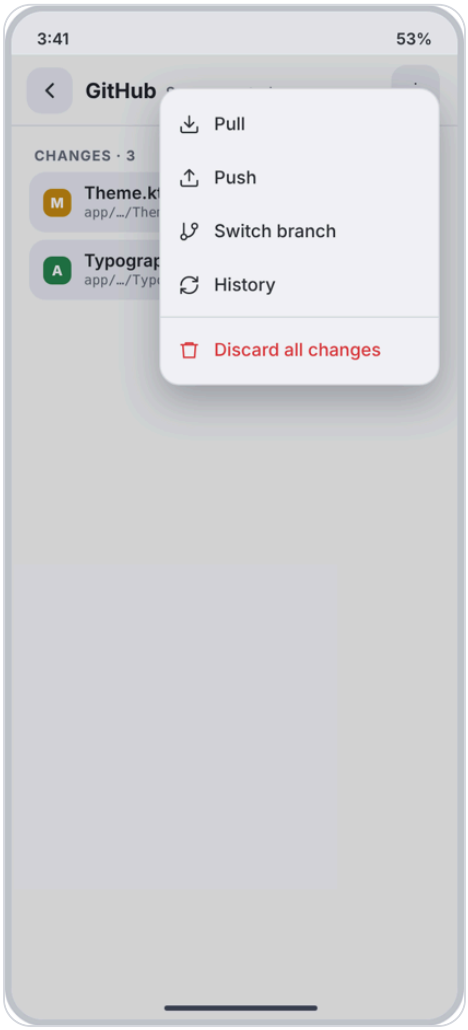


Popup from the more button: Pull, Push, Switch branch, History, divider, Discard all changes (red, asks first). Switch branch opens a sheet with local and remote branches and a New branch row.

19. History

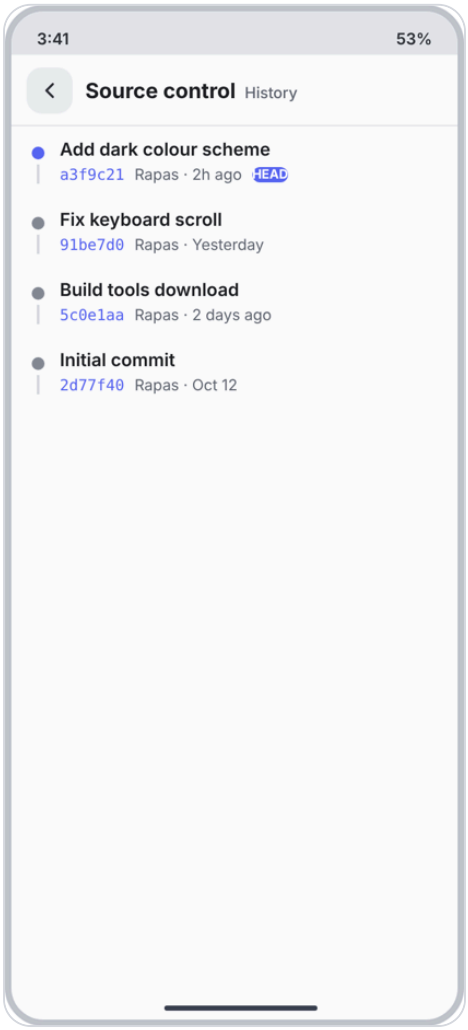


Full screen with back. Commit list: graph dot and line on the left (blurple = HEAD), message 14 sp bold, then short hash (mono, blurple), author, time, and a blurple HEAD tag on the newest commit. Tap a commit to open screen 20. Pull down to refresh; scroll to the end loads older commits (30 at a time).

20. Commit detail

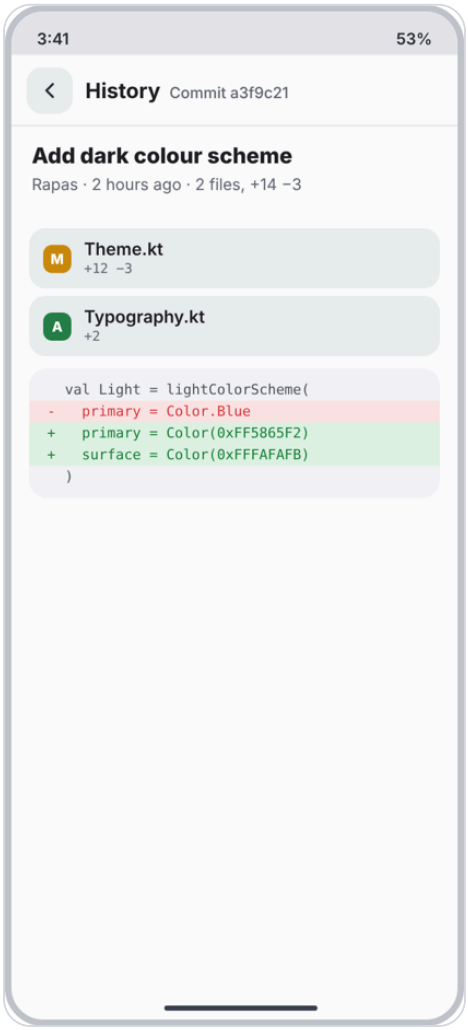

Full screen with back. Title "Commit a3f9c21". Message 17 sp extra bold, line with author, time and file counts (+14 -3). Changed files as rows (letter tile, name, +/- counts). Under the files a read-only diff preview. Tap a file for the full diff (screen 21 without Discard and Stage).


21. Diff view

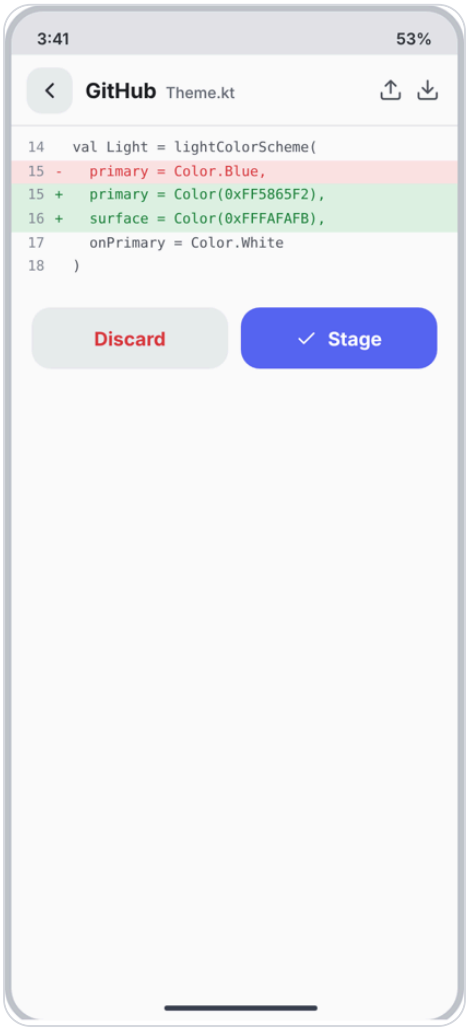

Full screen with back. Title is the file name, sub "Changes", and up and down arrows that jump to the previous and next change. Mono 11 sp, 1.7 line height. Line number column 34 dp, sign column 14 dp. Added lines: green background (#DDF3E4) and green text; removed lines: red background (#FBE4E5) and red text; unchanged lines plain. Bottom buttons: **Discard** (red text, asks first) and **Stage** (blurple). Long unchanged runs fold into a "12 unchanged lines" row you can tap to expand.


Screens 22 to 31: terminal, build, preview, logs, problems

22. Terminal (sidebar)

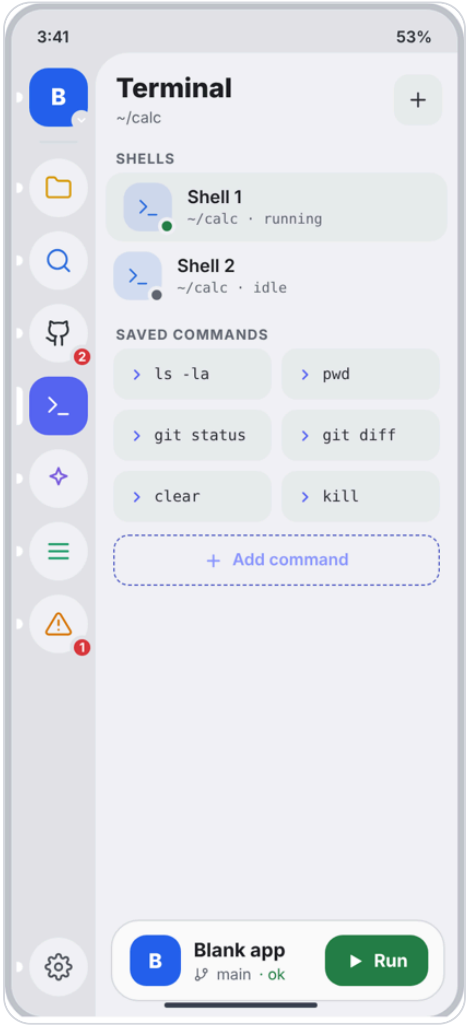


Panel "Terminal", sub = folder, plus button for a new shell. "SHELLS" rows: terminal tile with a status dot (green running, grey idle), name, folder and state. Tap opens screen 23. "SAVED COMMANDS" grid, two per row: mono chips (ls -la, pwd, git status, git diff, clear, kill). Tap a chip to run it in the current shell. Dashed **Add command** tile opens screen 24. Run card at the bottom.

23. Terminal session

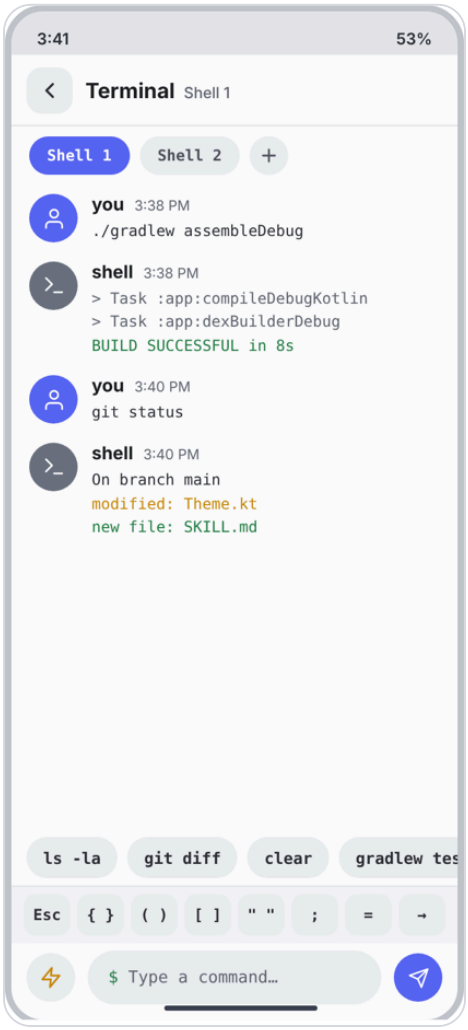


Full screen with back. Title "Terminal", sub = folder. Shell tabs (Shell 1, Shell 2) with a plus chip. Output is shown as messages: avatar (blurple user for input, dark tile for shell output), name, time, then the text in mono. Success lines green, errors red, warnings amber. A row of quick-command chips, then the key row (Esc, { }, ( ), [ ], " ", ;, =, arrow), then the input bar with a bolt button (saved commands), the field "$ Type a command..." and a send button. Copy, share and clear are in the long-press menu on a message. Uses a PTY when available and falls back to the pipe terminal (Settings > Terminal).

24. New command

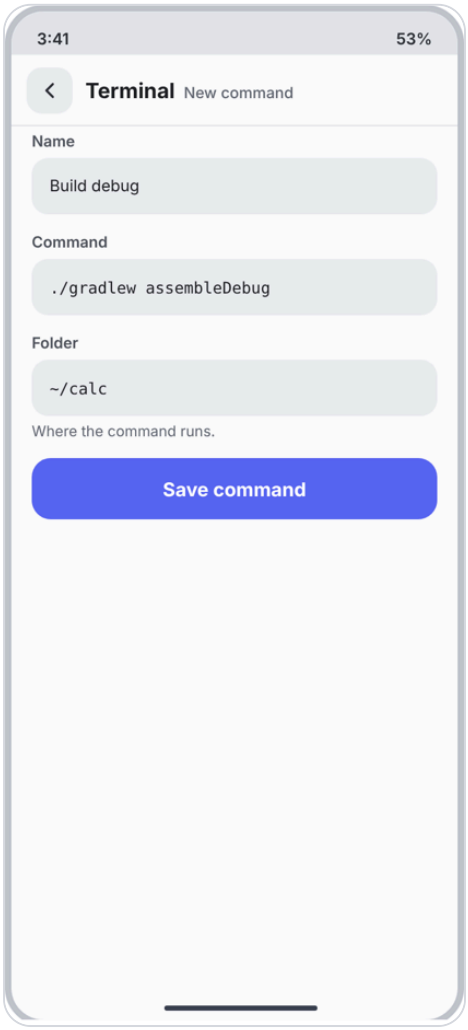


Full screen with back. Fields: **Name**, **Command** (mono), **Folder** (mono, default \~/project, hint "Where the command runs."). **Save command** button. Editing an existing command uses the same screen with Delete at the bottom.

25. Run and build

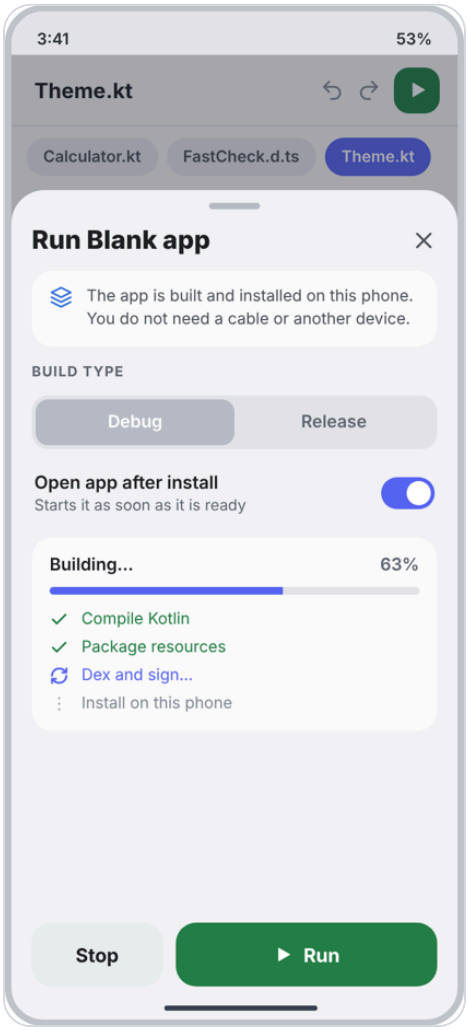


Bottom sheet over the editor (close X, swipe down or Back). Title "Run Blank app". Info card: "The app is built and installed on this phone. You do not need a cable or another device." **BUILD TYPE** segmented: Debug or Release. Toggle **Open app after install**. Progress card: "Building... 63%", bar, and the steps Compile Kotlin, Package resources, Dex and sign, Install on this phone with tick (done, green), spinner (now, blurple), dots (waiting). Bottom: **Stop** (secondary) and **Run** (green, play icon). While building Run shows "Building..." and is disabled. Errors turn the card red with "Build failed - 3 problems" and a View problems button. Release builds ask for a signing key if none is set.

26. Build finished

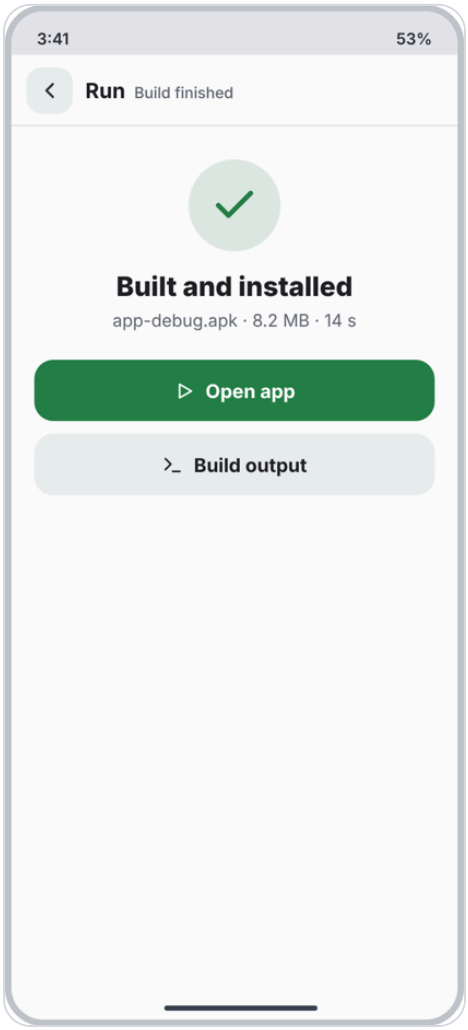


Full screen with back. Green tick in a circle, "Built and installed", "app-debug.apk - 8.2 MB - 14 s". Buttons: **Open app** (green) and **Build output** (opens the terminal-style log). Android shows its own install prompt first when needed.

27. Website preview

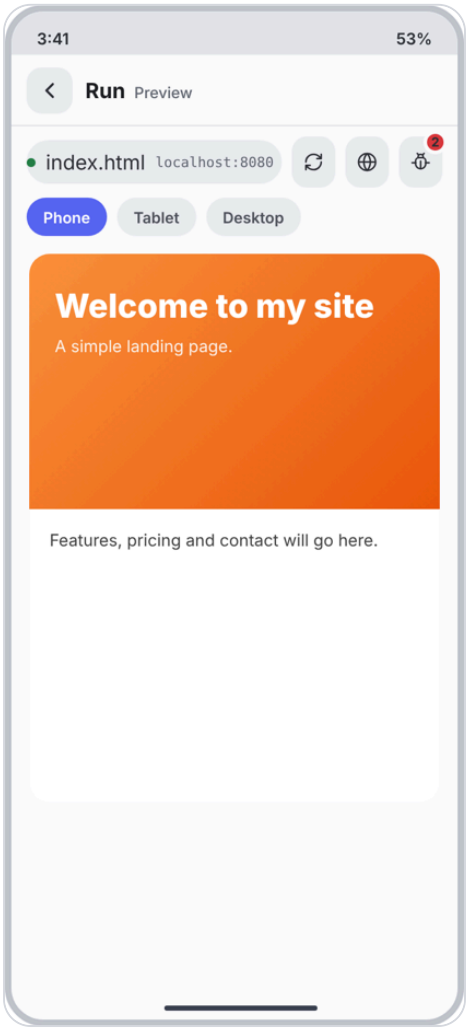


For website projects. Full screen with back. Title "Preview", sub = file. Toolbar: address pill (34 dp, green live dot, file name, local address such as localhost:8080), refresh (keeps scroll position), open in browser, and a console button with a red error count. Chips **Phone**, **Tablet**, **Desktop** change the page width. The page is shown in a WebView with rounded corners.

28. Console

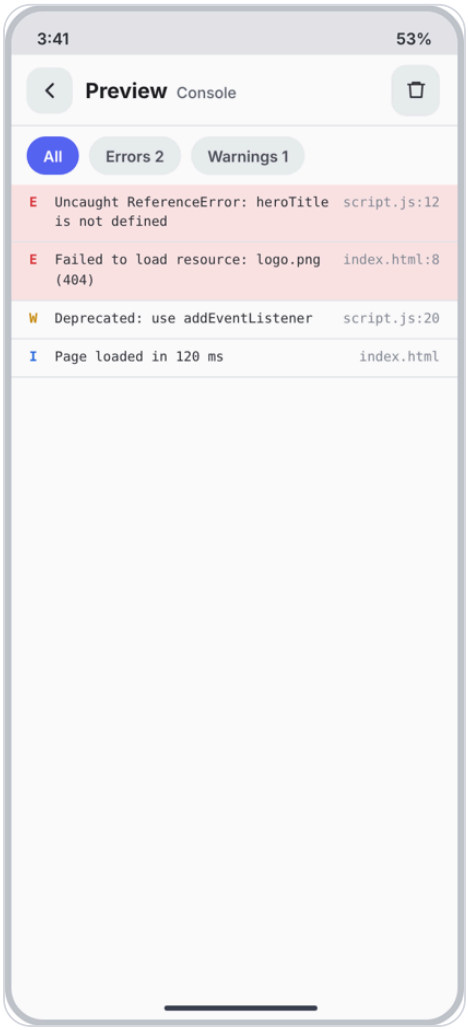


Full screen with back. Title "Console" with the error count, clear button. Chips All, Errors, Warnings with counts. Rows: level letter (E red, W amber, I blue), message, file and line at the right. Error rows have a light red background. Tap a row to open the file at that line.

29. Compose previews

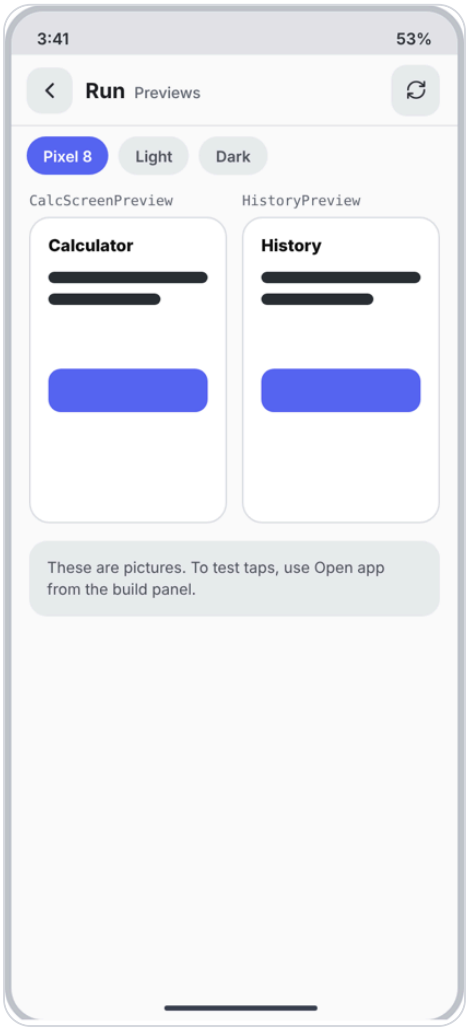


For Android projects. Full screen with back. Title "Previews", sub "Compose @Preview", refresh button. Chips: device (Pixel 8), Light, Dark. Each @Preview function renders to a card with its function name above. These are pictures; taps do nothing. Note at the bottom: "These are pictures. To test taps, use Open app from the build panel." Rendering uses the incremental build and shows a spinner on a card while it renders.

30. Logcat

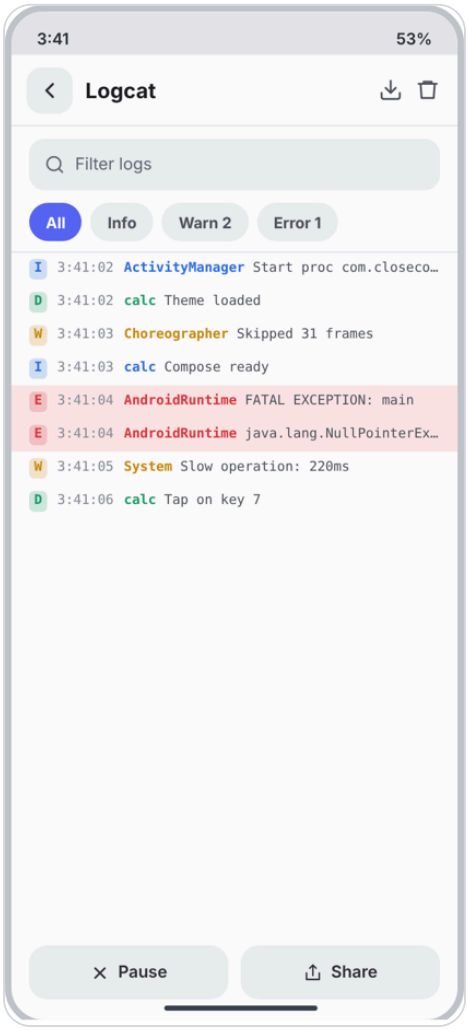

Rail tool Logcat. Title "Logcat", sub = package, buttons: scroll to end and clear. Filter field, level chips All, Info, Warn, Error. Each line: level tile (I blue, D green, W amber, E red), time, tag (bold, coloured), message in mono 10.5 sp. Error lines have a light red background. Buttons **Pause** and **Share**. Shows only the open app's package by default.

31. Problems

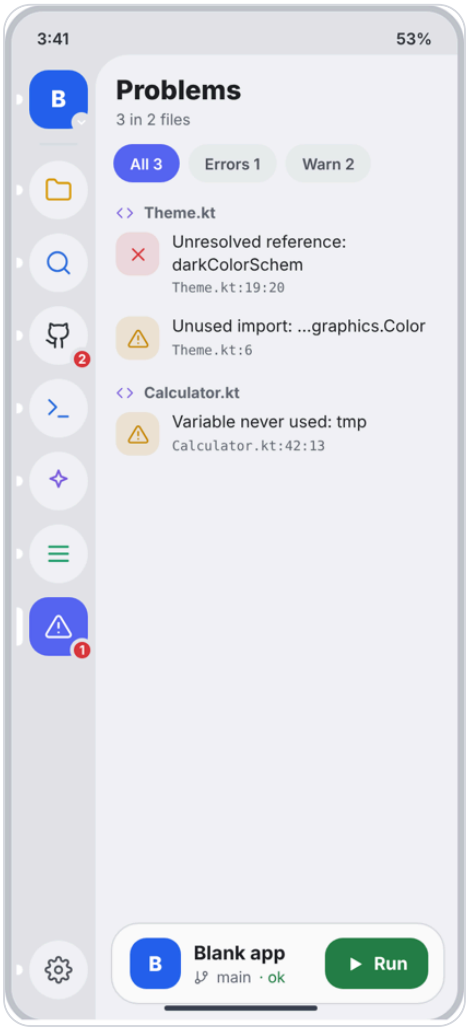


Rail tool Problems (red badge = errors). Title "Problems", sub "3 in 2 files". Chips All, Errors, Warnings with counts. Grouped by file; each problem has a tile (red x or amber triangle), the message, and "File.kt:19:20". Tap to open the file at that place.

Screens 32 to 45: Settings and project settings


Settings is the bottom tool of the rail. The panel shows the category list (screen 32). Every category opens a full screen with a back button; back returns to the category list with the same row still highlighted.

32. Settings categories

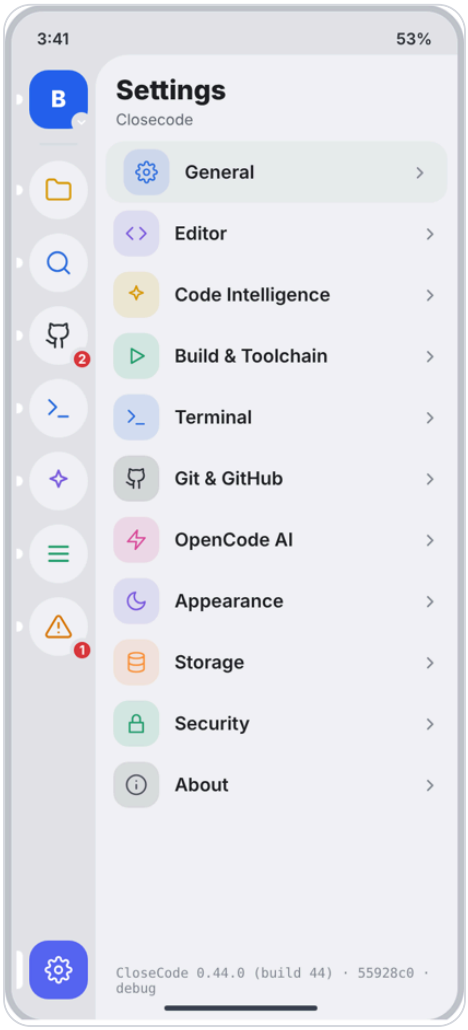


Panel title "Settings", sub "Closecode". Rows with a 36 dp tinted tile: General, Editor, Code Intelligence, Build and Toolchain, Terminal, Git and GitHub, OpenCode AI, Appearance, Storage, Security, About. Chevron at the right; the open category is highlighted. Footer in mono: "CloseCode 0.44.0 (build 44) - 55928c0 - debug". Tapping the footer 7 times opens Developer (screen 44).

33. General

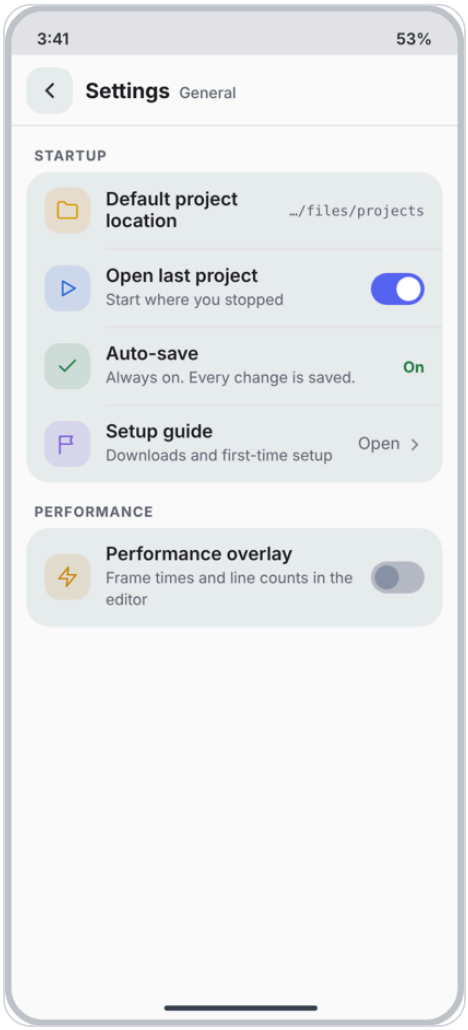


STARTUP: **Default project location** (shows path, tap to choose a folder), **Open last project** (toggle, starts where you stopped), **Auto-save** (shows On; always on, cannot be switched off), **Setup guide** (Open: reopens screen 6). PERFORMANCE: **Performance overlay** (toggle, shows average and 95th-percentile frame time and line count over the editor).

34. Editor

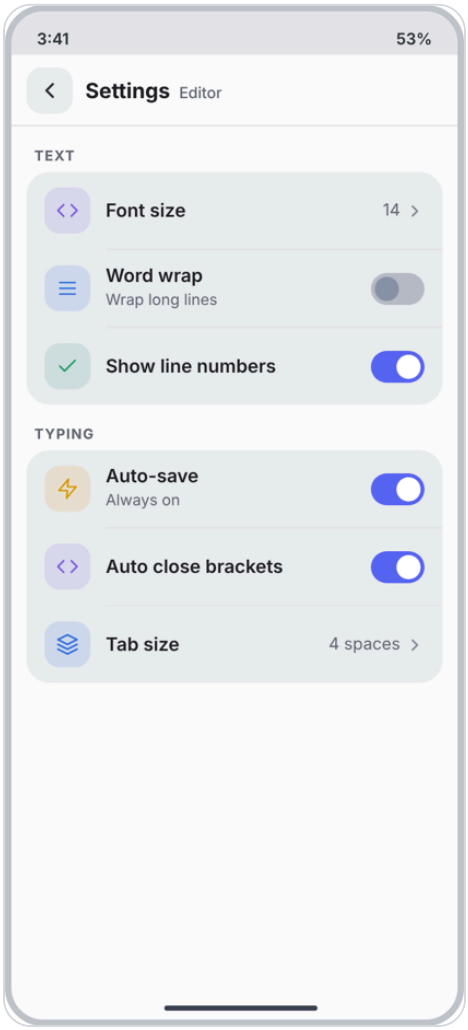


TEXT: Font size (value 14, tap to pick 10 to 22), Word wrap (toggle), Show line numbers (toggle). TYPING: Auto-save (on, fixed), Auto close brackets (toggle), Tab size (2, 4 or 8 spaces). Changes apply to the open editor at once.

35. Code Intelligence

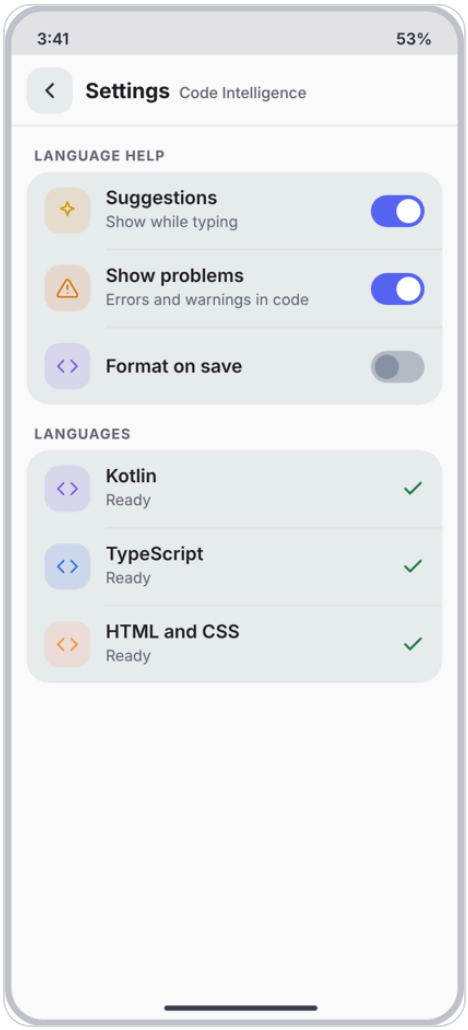


LANGUAGE HELP: Suggestions (toggle), Show problems (toggle), Format on save (toggle). LANGUAGES: Kotlin, TypeScript, HTML and CSS, each with a green tick when its language support is installed, or a Download button.

36. Build and Toolchain

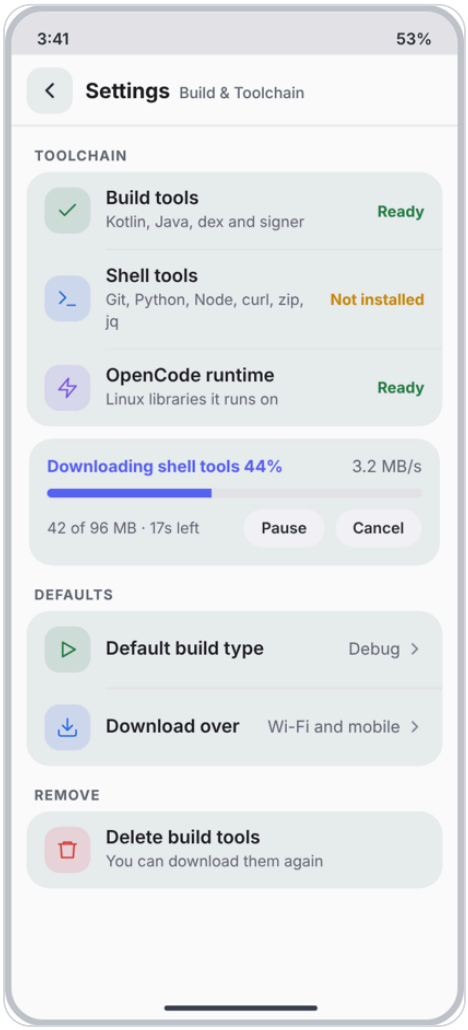


TOOLCHAIN: Build tools (Ready), Shell tools (Not installed or Ready), OpenCode runtime (Ready). While downloading, a card shows "Downloading shell tools 44%", speed, size, time left, Pause and Cancel. DEFAULTS: Default build type (Debug or Release), Download over (Wi-Fi only or Wi-Fi and mobile). REMOVE: **Delete build tools** (red, "You can download them again", asks first).

37. Terminal settings

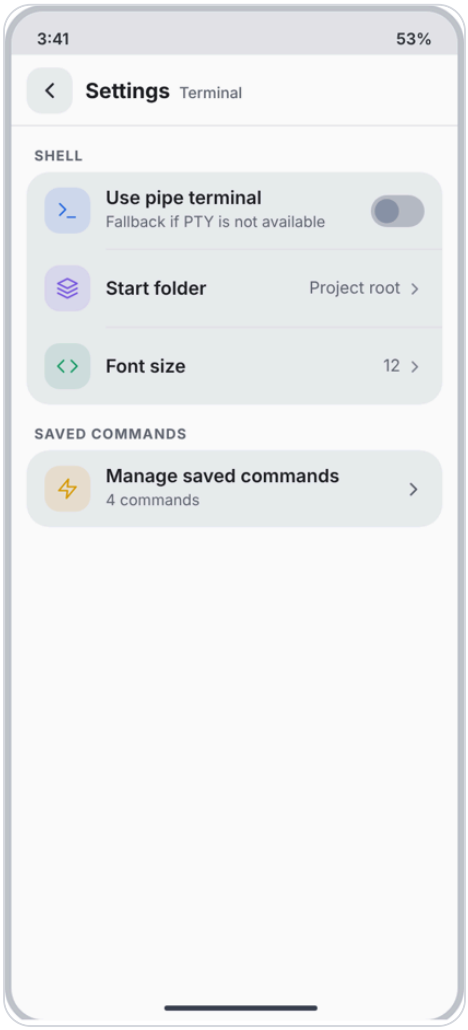


SHELL: Use pipe terminal (toggle; fallback if PTY is not available), Start folder (Project root or Home), Font size. SAVED COMMANDS: Manage saved commands (count, opens a list with edit and delete; the plus button opens screen 24).

38. Git and GitHub

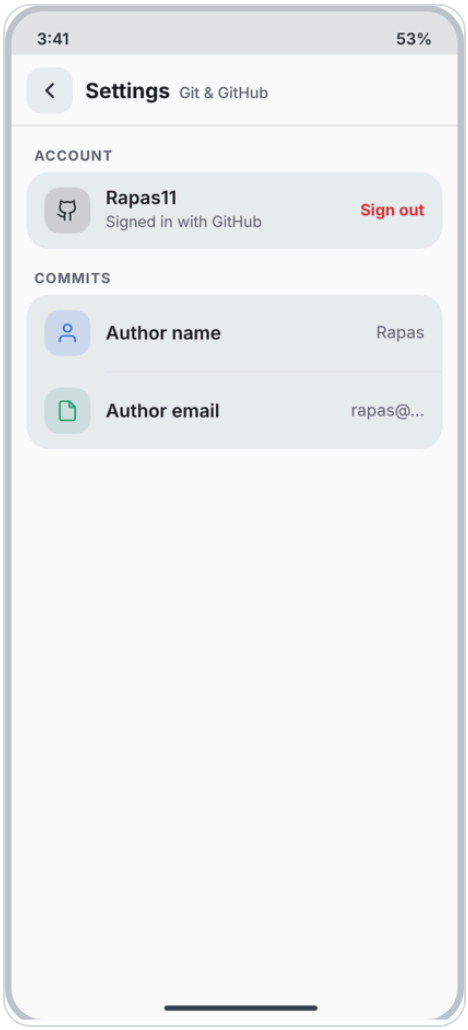


ACCOUNT: signed-in user name with **Sign out** (red; asks first and removes the stored token). When signed out: **Sign in with GitHub**. COMMITS: Author name and Author email (tap to edit; used for every commit).

39. OpenCode AI (setup only)

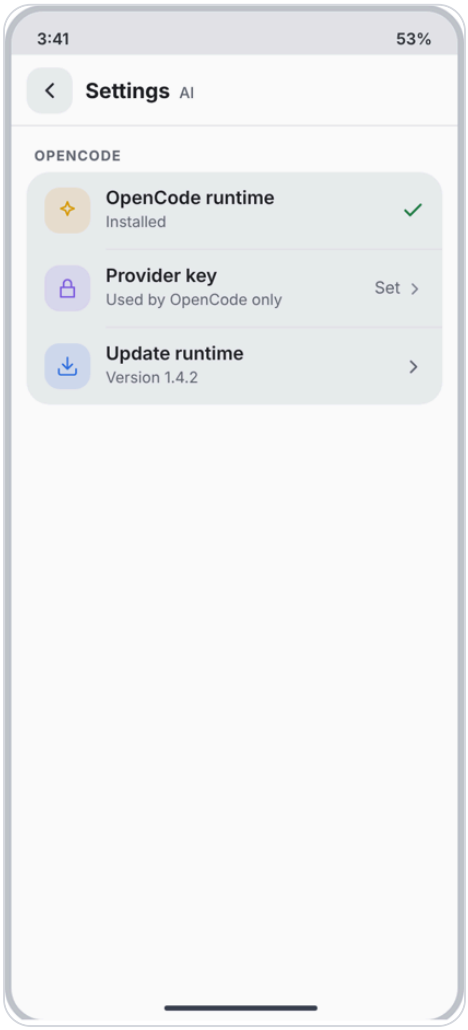


Only setup, no chat. OPENCODE: OpenCode runtime (Installed tick), Provider key (Set or Not set; the key is stored encrypted and used only by OpenCode), Update runtime (shows the version). The AI itself runs in OpenCode; the editor has no AI button or panel.

40. Appearance

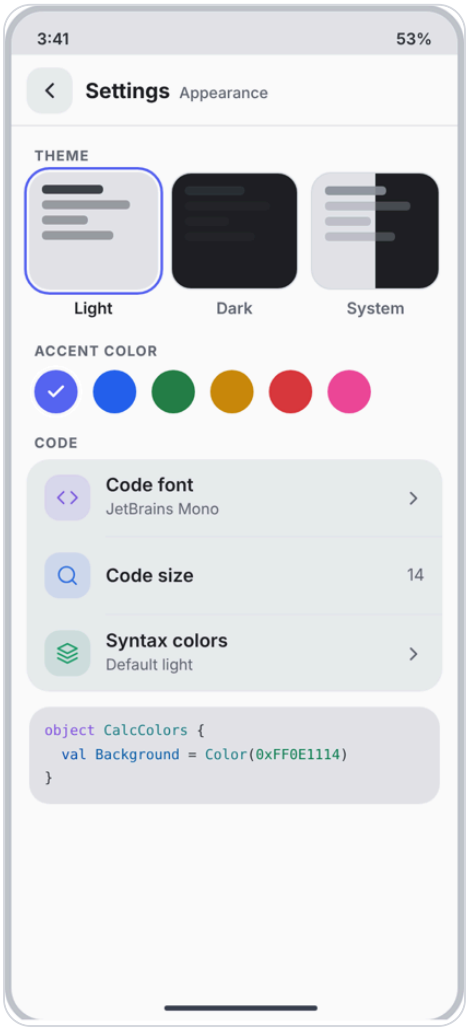


THEME: three preview cards **Light**, **Dark**, **System** (selected one has a blurple outline). ACCENT COLOR: six circles (blurple default, blue, green, amber, red, pink), selected one shows a tick. CODE: Code font, Code size, Syntax colours (Default light or Default dark), and a live preview of three code lines. Switching theme applies without restarting the app.

41. Storage

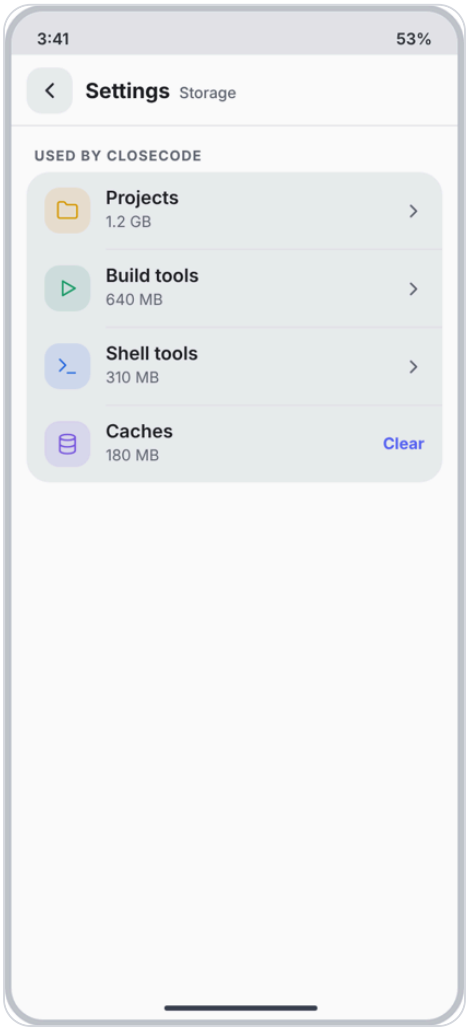


USED BY CLOSECODE: Projects, Build tools, Shell tools, Caches, each with its size. Tap a row to see what is inside; **Clear** on Caches deletes caches after a confirmation.

42. Security

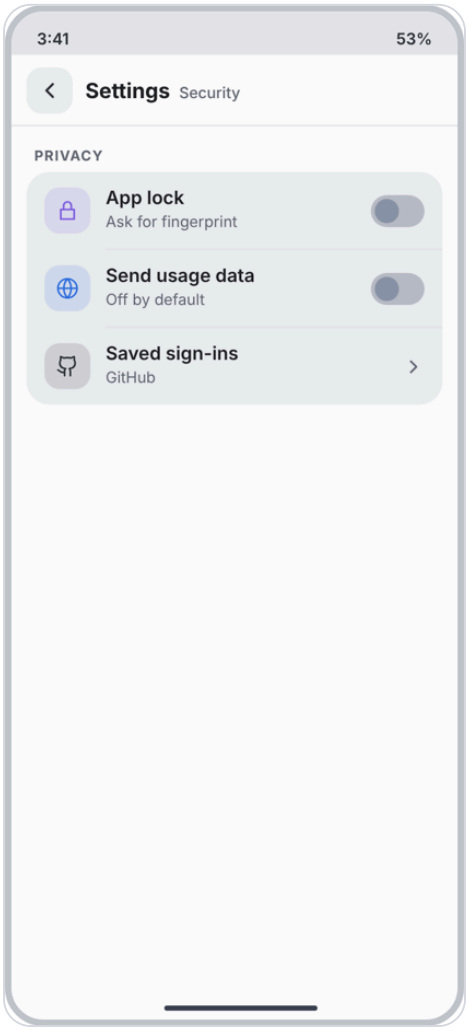


PRIVACY: App lock (toggle, asks for fingerprint or device lock when the app opens), Send usage data (off by default), Saved sign-ins (GitHub; opens a list with a remove action).

43. About

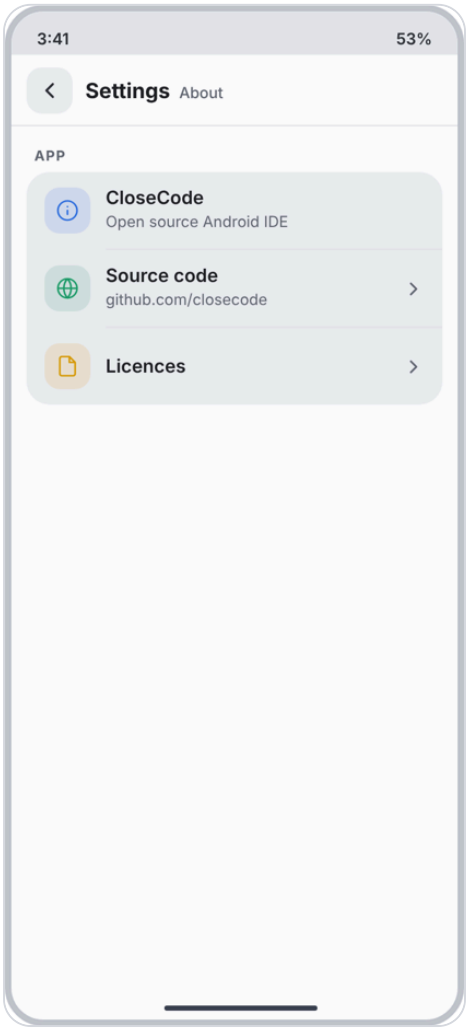


CloseCode (open source Android IDE, version line), Source code (opens the repository link), Licences (list of open source licences).

44. Developer

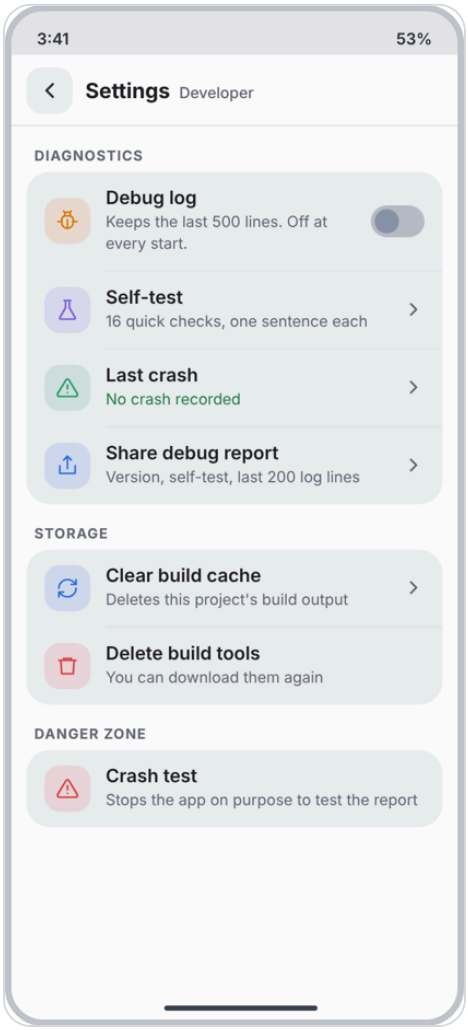

Opened by tapping the version footer 7 times. DIAGNOSTICS: Debug log (toggle; keeps the last 500 lines, off at every start), Self-test (16 quick checks, one sentence each), Last crash ("No crash recorded" or the time), Share debug report (version, self-test, last 200 log lines). STORAGE: Clear build cache (this project), Delete build tools. DANGER ZONE: Crash test (stops the app on purpose to test the report; asks first).

45. Project settings

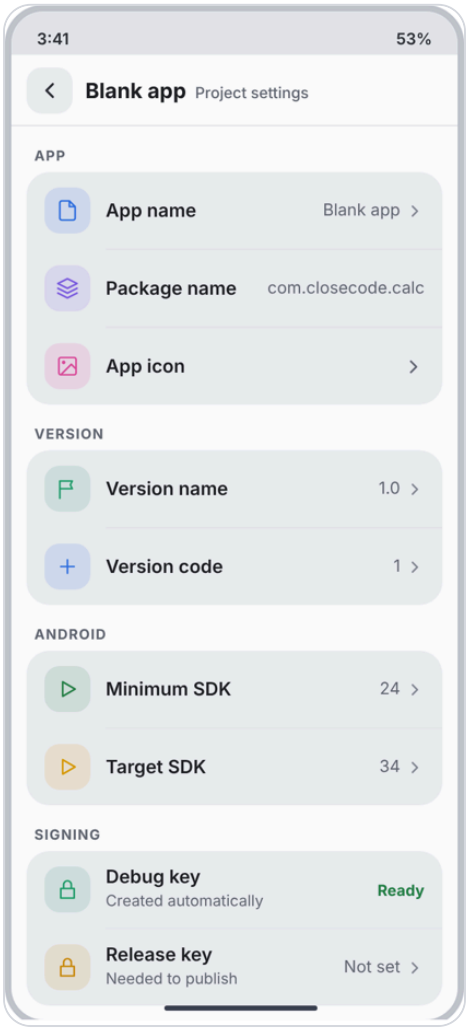


Opened from the project avatar menu or the project row. APP: App name, Package name (for example com.closecode.calc), App icon (opens an image picker). VERSION: Version name, Version code. ANDROID: Minimum SDK, Target SDK. SIGNING: Debug key (created automatically, Ready), Release key (Not set until the user creates or imports one; needed to publish). Back saves the changes.

Screens 46 to 50: OpenCode tool


OpenCode is a tool in the left rail (sparkle icon, purple), between Terminal and Logcat. Its panel starts and watches OpenCode on the phone and then opens OpenCode's own web page inside the app. The OpenCode web page itself is not redesigned. The run steps and texts come from the OpenCode AI Tab Spec; this section only gives the new look and the navigation.

46. OpenCode: start

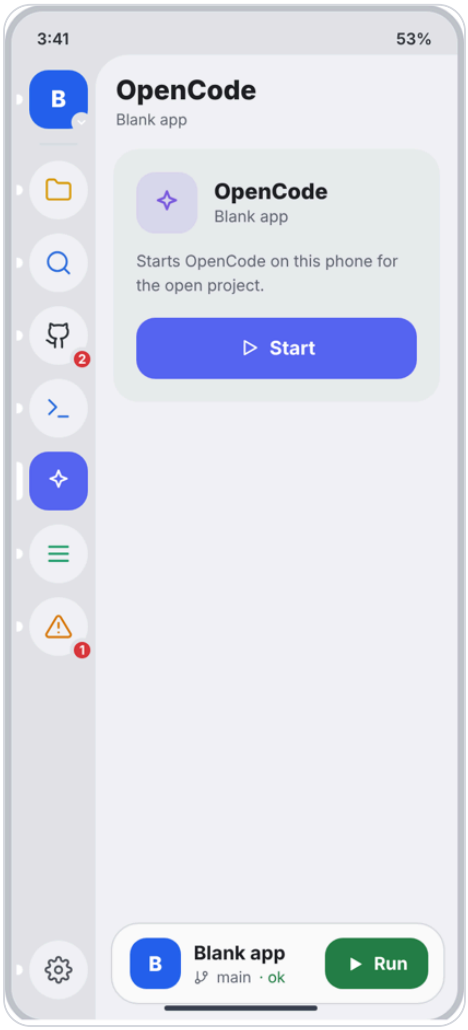


Panel title "OpenCode", sub = project name. A card with the sparkle tile, "OpenCode", the project name, one line "Starts OpenCode on this phone for the open project." and a blurple **Start** button. Run card at the bottom as on the other tools.

47. OpenCode: starting

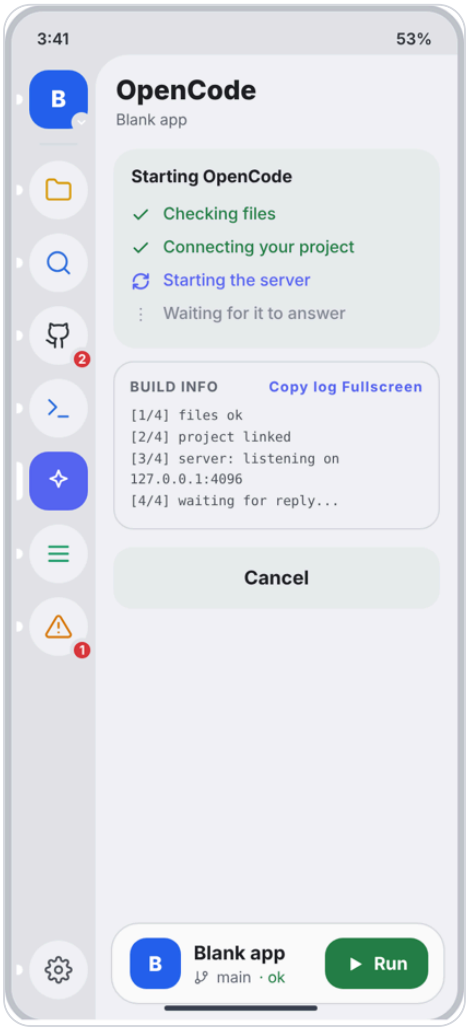


Card "Starting OpenCode" with four steps: Checking files, Connecting your project, Starting the server, Waiting for it to answer (done = green tick, now = blue spinner, waiting = dots). Under it the **BUILD INFO** box with the log in mono, plus Copy log and Fullscreen. **Cancel** button below.

48. OpenCode: running

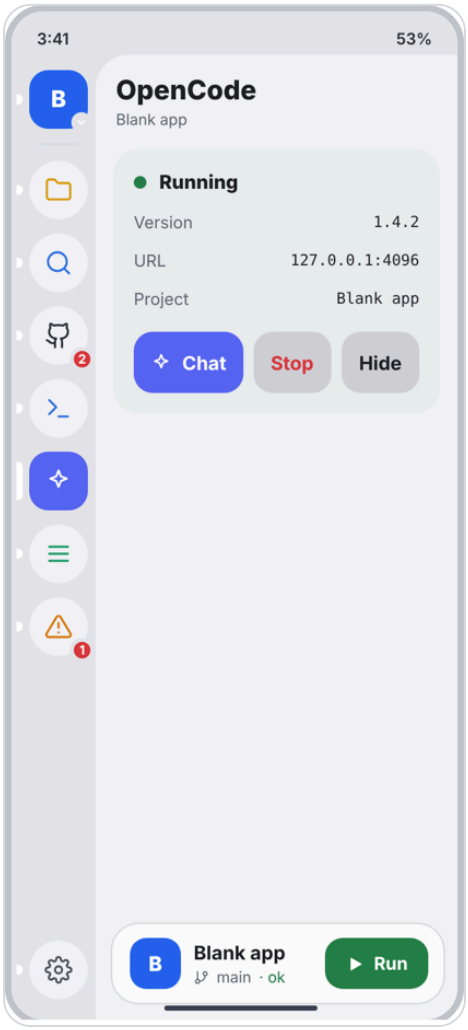


Status card with a green dot and "Running", then Version, URL and Project rows. Buttons: **Chat** (opens screen 50), **Stop** (red text, stops the server) and **Hide** (keeps it running in the background and leaves the panel).

49. OpenCode: connection lost

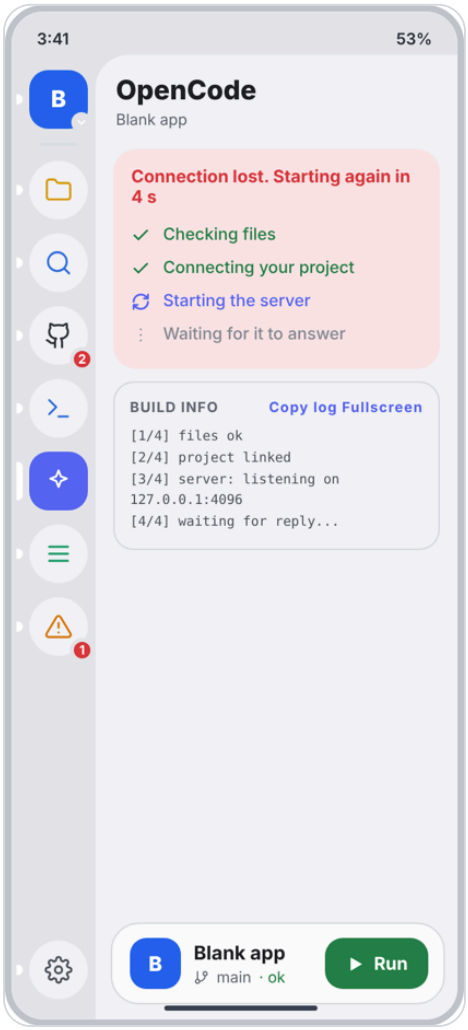

Same layout as Starting, with a red banner "Connection lost. Starting again in 4 s". It restarts by itself and shows the countdown; there is no button to press.

50. OpenCode: chat page

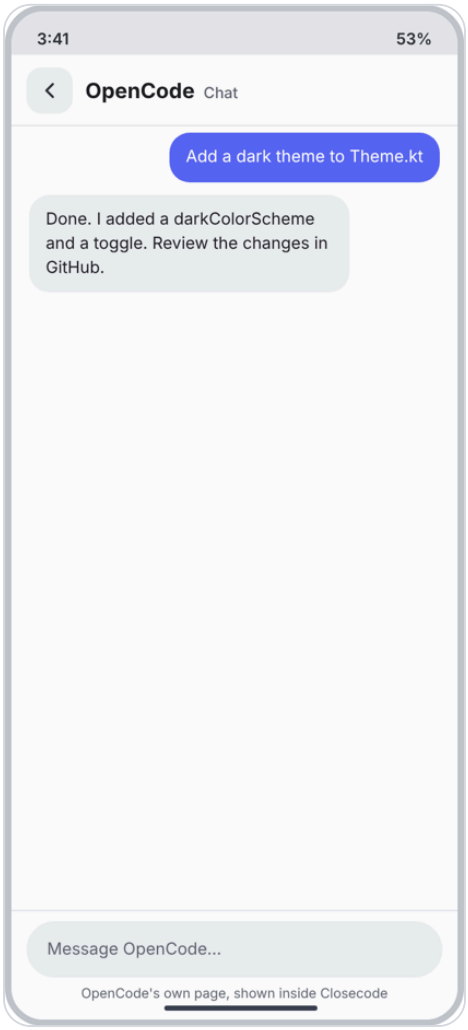

Full screen with back. Header: OpenCode (origin, bold) and Chat (current). The body is OpenCode's own web page, shown in a WebView; the picture is only a placeholder. Back returns to the OpenCode panel (screen 48) and OpenCode keeps running.

#	File	Screen	Back
46	46-opencode-start	OpenCode start	root
47	47-opencode-starting	OpenCode starting	root
48	48-opencode-running	OpenCode running	root
49	49-opencode-lost	OpenCode connection lost	root
50	50-opencode-chat	OpenCode chat page	yes

States, notes and acceptance checklist

Empty, loading and error states (not drawn; use these rules)

Place	Empty	Loading	Error
Recent projects	Text "No projects yet" and the Start a project button	none	none
Files	"This folder is empty" with a New file button	thin progress line under the title	red line "Could not read folder" with Try again
Search	"Type to search"	spinner in the field	"Search failed" with Try again; "No results" when nothing found
GitHub changes	"No changes" with a tick	spinner on the refresh button	red banner with the message from git

Place	Empty	Loading	Error
History	"No commits yet"	skeleton rows	banner with Try again
Terminal	"Shell 1 is ready" line	none	red message line and a Restart shell button
Logcat and Console	"Nothing logged yet"	none	none
Problems	"No problems" with a green tick	none	none
Build	none	progress card (screen 25)	red card with problem count and View problems
Clone and sign-in	none	progress (screens 5, 16)	red card with message and Try again

Implementation notes

1. **Back handling.** Keep one back stack. Opening a rail tool, a full screen or a sheet pushes an entry. Hardware or gesture Back and the on-screen back chevron both pop one entry. Sheets and menus pop on Back. At the editor root with the sidebar closed: first Back shows the toast "Press back again to exit" for 2 seconds, the second exits.
2. **Swipe.** Use a horizontal drag on the editor with a 24 dp slop. The sidebar width is the full phone width minus the 110 dp visible strip of editor. Do not capture swipes inside the code area when text is being selected.
3. **Theme.** Define all colours as tokens (section Design tokens). Dark theme uses the earlier dark tokens. Never hard-code hex in screens.
4. **Auto-save.** Write the file 1 second after the last key press, on tab change and on app pause. Show no save button, no unsaved dot.
5. **No device list.** The build installs on the same phone. Do not add device pickers or cable text.
6. **No AI UI.** No AI button inside the editor and no suggestions bar. OpenCode lives in its own rail tool (screens 46 to 50) and in its setup screen (39).
7. **Rail badges.** GitHub badge = changed files. Problems badge = errors. Hide a badge at zero.
8. **Performance.** Screens 7 to 13 must keep 60 fps while the sidebar animates; render the side panel lazily and keep the editor as a single layer during the swipe.
9. **Earlier specs still apply** for logic and sizes not drawn here: Code Editor Design Spec, App Screens Design Spec, Screens Update Spec and Part B (build, install, previews, terminal).

Acceptance checklist

- [ ] Every screen except the editor, Welcome, First-time setup and the first screen of a rail tool has a back button at the top left.
- [ ] The sidebar opens only by swipe; no button opens it.
- [ ] There is no Save, More or device control anywhere, and no AI button in the editor.
- [ ] Rail shows project avatar, Files, Search, GitHub, Terminal, OpenCode, Logcat, Problems and Settings at the bottom.
- [ ] Run card on Files, Search, Terminal and Problems panels; Run starts a build that installs on this phone.
- [ ] Colours match the token table in light theme; no pure white (#FFFFFF) backgrounds on app surfaces.
- [ ] Every Settings category opens, has a back button and returns to the category list.
- [ ] Developer opens only from the version footer (7 taps).
- [ ] Clone, GitHub sign-in (device code), source control, history, commit detail and diff work as described.
- [ ] Terminal session, saved commands and new command form work; PTY falls back to pipe.
- [ ] Website preview, Console and Compose previews open from the Run flow for the right project type.
- [ ] Light, Dark and System themes switch without restarting.