

TASK VPC - 1

1. Create VPC with 2 private and 2 public subnets.

Login to Amazon Console

Create

VPC → Your VPCs → Create VPC

vpc-0bb8c172721640507 / MY VPC Actions

Details [Info](#)

VPC ID vpc-0bb8c172721640507	State Available	Block Public Access Off	DNS hostnames Disabled
DNS resolution Enabled	Tenancy default	DHCP option set dopt-0e41b21c81fd4a282	Main route table rtb-07c34c7d509f2fb91
Main network ACL acl-0cbb8db29d5afec	Default VPC No	IPv4 CIDR 10.0.0.0/24	IPv6 pool -
IPv6 CIDR (Network border group) -	Network Address Usage metrics Disabled	Route 53 Resolver DNS Firewall rule groups -	Owner ID 567487919764
Encryption control ID -	Encryption control mode -		

2

Subnets (10) [Info](#) Last updated 2 minutes ago Actions Create subnet

Find subnets by attribute or tag

	Name	Subnet ID	State	VPC	Block Public...	IPv4 CIDR	IPv6 C
☐	-	subnet-5a7fa2d2c11b75a2b5a1	Available	vpc-0ff35eb0730a112f0	Off	172.31.30.0/20	-
☐	-	subnet-09e9516764dcfc6b3	Available	vpc-0ff35eb0730a112f0	Off	172.31.16.0/20	-
☐	-	subnet-0f5e6991df2c26cf9	Available	vpc-0ff35eb0730a112f0	Off	172.31.64.0/20	-
☐	MS-PVT 1	subnet-06fcef8296afdc05	Available	vpc-0bb8c172721640507 MY ...	Off	10.0.0.0/28	-
☐	MS PVT 2	subnet-0c542ad08d843c6e1	Available	vpc-0bb8c172721640507 MY ...	Off	10.0.0.16/28	-
☐	MY PUB 1	subnet-0db5ae3b012c8603e	Available	vpc-0bb8c172721640507 MY ...	Off	10.0.0.32/28	-
☐	MS PUB -2	subnet-0fa17cd79035cc350	Available	vpc-0bb8c172721640507 MY ...	Off	10.0.0.48/28	-

2. Enable DNS Hostname in VPC.

VPC

→ Your VPCs

→ Select DevOps-VPC → Actions → Edit VPC settings

VPC > **Your VPCs** > **vpc-0bb8c172721640507** > **Edit VPC settings**

Edit VPC settings [Info](#)

VPC details

VPC ID
vpc-0bb8c172721640507

Name
MY VPC

DHCP settings

DHCP option set [Info](#)

dopt-0e41b21c81fd4a282

DNS settings

☒ Enable DNS resolution [Info](#)

☒ Enable DNS hostnames [Info](#)

TASK VPC - 1

3. Enable Auto Assign Public IP in 2 public subnets.

VPC → Subnets → Public-Subnet-1 → Actions → Edit subnet settings







[Alt+S]  Ask Amazon Q

VPC > Subnets > subnet-0fa17cd79035cc350 > Edit subnet settings

Edit subnet settings [Info](#)

Subnet

Subnet ID

 subnet-0fa17cd79035cc350

Name

 MS PUB -2

Auto-assign IP settings [Info](#)

Enable AWS to automatically assign a public IPv4 or IPv6 address to a new primary network interface for an instance in this subnet.

☒ Enable auto-assign public IPv4 address [Info](#)

☐ Enable auto-assign customer-owned IPv4 address [Info](#)
Option disabled because no customer owned pools found.

Resource-based name (RBN) settings [Info](#)

Specify the hostname type for EC2 instances in this subnet and optional RBN DNS query settings.

☐ Enable resource name DNS A record on launch [Info](#)

☐ Enable resource name DNS AAAA record on launch [Info](#)

Hostname type [Info](#)

☐ Resource name

☒ IP name

Edit subnet settings [Info](#)

Subnet

Subnet ID

 subnet-0db5ae3b012c8603e

Name

 MY PUB 1

Auto-assign IP settings [Info](#)

Enable AWS to automatically assign a public IPv4 or IPv6 address to a new primary network interface for an instance in this subnet.

☒ Enable auto-assign public IPv4 address [Info](#)

☐ Enable auto-assign customer-owned IPv4 address [Info](#)
Option disabled because no customer owned pools found.

Resource-based name (RBN) settings [Info](#)

Specify the hostname type for EC2 instances in this subnet and optional RBN DNS query settings.

☐ Enable resource name DNS A record on launch [Info](#)

☐ Enable resource name DNS AAAA record on launch [Info](#)

Hostname type [Info](#)

☐ Resource name

☒ IP name

TASK VPC - 1

4. Add 2 private subnets in private route table.

VPC

→ Route Tables

→ Create route table

Then

Private-Route-Table

→ Subnet associations

→ Edit subnet associations

🟢 You have successfully updated subnet associations for rtb-0382bc409c3f72cb7 / PVT RT.

rtb-0382bc409c3f72cb7 / PVT RT Actions ▾

Details [Info](#)

Route table ID 🔗 rtb-0382bc409c3f72cb7	Main 🔗 No	Explicit subnet associations 2 subnets	Edge associations -
VPC vpc-0bb8c172721640507 MY VPC	Owner ID 🔗 567487919764		

Routes | **Subnet associations** | Edge associations | Route propagation | Tags | Related resources

Explicit subnet associations (2) Edit subnet associations

🔍 Find subnet association

Name ▾	Subnet ID ▾	IPv4 CIDR ▾	IPv6 CIDR ▾
MS PVT 2	subnet-0c542ad08d843c6e1	10.0.0.16/28	-
MS-PVT 1	subnet-06fcef8296afdc05	10.0.0.0/28	-

5. Add 2 public subnets in public route table.

VPC

→ Route Tables

→ Create route table

Then

Public-Route-Table

+— Public-Subnet-1

+— Public-Subnet-2

🟢 You have successfully updated subnet associations for rtb-0aba8d40af0e18398 / PUB RT.

rtb-0aba8d40af0e18398 / PUB RT Actions ▾

Details [Info](#)

Route table ID 🔗 rtb-0aba8d40af0e18398	Main 🔗 No	Explicit subnet associations 2 subnets	Edge associations -
VPC vpc-0bb8c172721640507 MY VPC	Owner ID 🔗 567487919764		

Routes | **Subnet associations** | Edge associations | Route propagation | Tags | Related resources

Explicit subnet associations (2) Edit subnet associations

🔍 Find subnet association

Name ▾	Subnet ID ▾	IPv4 CIDR ▾	IPv6 CIDR ▾
MS PUB -2	subnet-0fa17cd79035cc350	10.0.0.48/28	-
MY PUB 1	subnet-0db5ae3b012c8603e	10.0.0.32/28	-

TASK VPC - 1

6. Public route table will have the routes to internet and local.

VPC

→ Internet Gateways

→ Create Internet Gateway

DevOps-IGW

→ Actions → Attach to VPC → DevOps-VPC

The screenshot shows the AWS Management Console interface for Internet Gateways. At the top, there's a table of Internet Gateways with columns for Name, ID, State, VPC ID, and Owner. One gateway, 'MY IGW' (igw-08c799d504eaf407), is shown as 'Detached'. An 'Actions' dropdown menu is open, showing options like 'View details', 'Attach to VPC', 'Detach from VPC', 'Manage tags', and 'Delete internet gateway'. Below the table, the 'Attach to VPC' wizard is displayed. It shows the selected gateway and a list of available VPCs, with 'vpc-0bb8c172721640507' selected. A green success banner at the bottom states: 'Internet gateway igw-08c799d504eaf407 successfully attached to vpc-0bb8c172721640507'. Below this, the details for 'igw-08c799d504eaf407 / MY IGW' are shown, including its ID, state ('Attached'), and VPC ID ('vpc-0bb8c172721640507 | MY VPC'). A 'Tags' section at the bottom shows a single tag with the key 'Name' and value 'MY IGW'.

7. Create EC2 in public subnet with t2.micro and install PHP.

```
sudo dnf update -y
```

```
sudo dnf install httpd php -y
```

Start Apache:

```
sudo systemctl enable --now httpd
```

Check:

```
systemctl status httpd
```

Create PHP test:


```
echo "<?php phpinfo(); ?>" | sudo tee /var/www/html/index.php
```

Then access:

TASK VPC - 1

<http://PUBLIC-IP/index.php>

You should see the PHP information page.

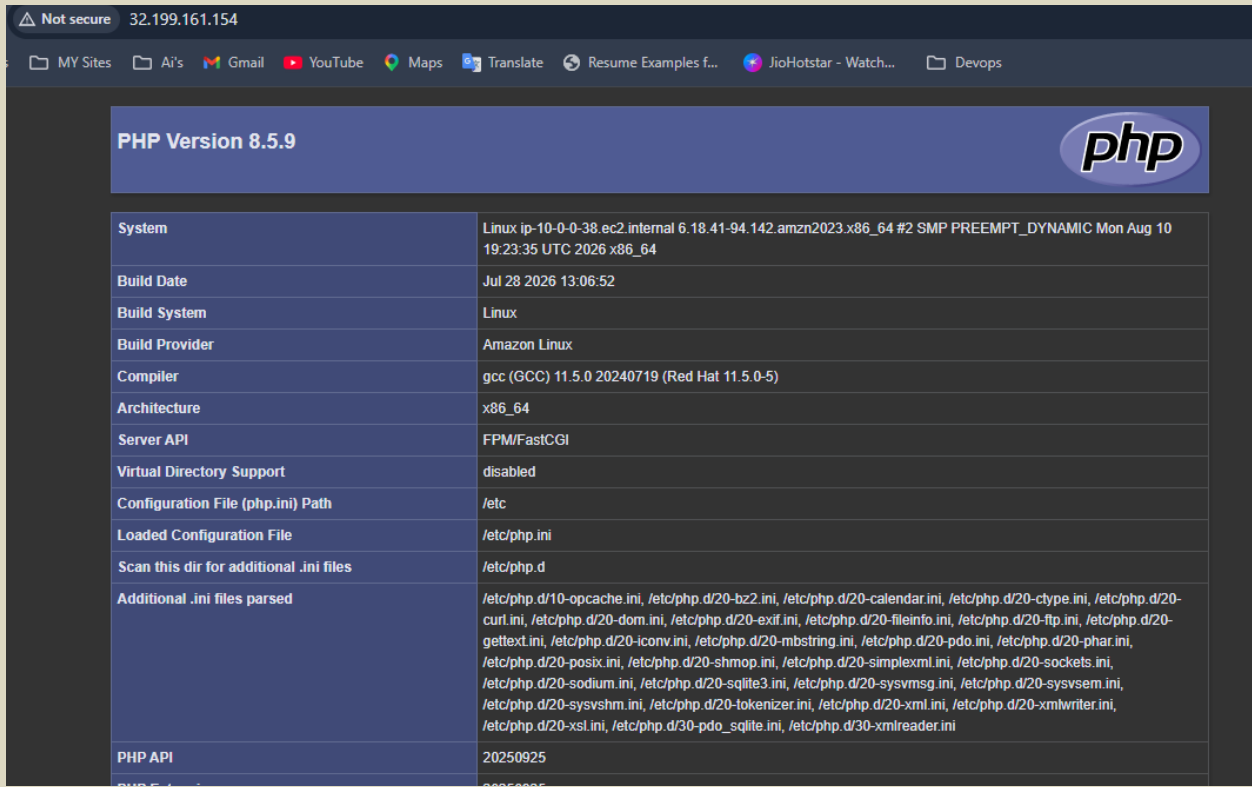

The screenshot shows a web browser window with the address bar displaying "32.199.161.154". The browser's address bar also shows "Not secure". The browser's tabs include "MY Sites", "Ai's", "Gmail", "YouTube", "Maps", "Translate", "Resume Examples f...", "JioHotstar - Watch...", and "Devops". The main content area displays the "PHP Version 8.5.9" information page. The page has a dark blue header with the "php" logo on the right. Below the header is a table with the following information:

System	Linux ip-10-0-0-38.ec2.internal 6.18.41-94.142.amzn2023.x86_64 #2 SMP PREEMPT_DYNAMIC Mon Aug 10 19:23:35 UTC 2026 x86_64
Build Date	Jul 28 2026 13:06:52
Build System	Linux
Build Provider	Amazon Linux
Compiler	gcc (GCC) 11.5.0 20240719 (Red Hat 11.5.0-5)
Architecture	x86_64
Server API	FPM/FastCGI
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc
Loaded Configuration File	/etc/php.ini
Scan this dir for additional .ini files	/etc/php.d
Additional .ini files parsed	/etc/php.d/10-opcache.ini, /etc/php.d/20-bz2.ini, /etc/php.d/20-calendar.ini, /etc/php.d/20-ctype.ini, /etc/php.d/20-curl.ini, /etc/php.d/20-dom.ini, /etc/php.d/20-exif.ini, /etc/php.d/20-fileinfo.ini, /etc/php.d/20-ftp.ini, /etc/php.d/20-gettext.ini, /etc/php.d/20-iconv.ini, /etc/php.d/20-mbstring.ini, /etc/php.d/20-pdo.ini, /etc/php.d/20-phar.ini, /etc/php.d/20-posix.ini, /etc/php.d/20-shmop.ini, /etc/php.d/20-simplexml.ini, /etc/php.d/20-sockets.ini, /etc/php.d/20-sodium.ini, /etc/php.d/20-sqlite3.ini, /etc/php.d/20-sysvmsg.ini, /etc/php.d/20-sysvsem.ini, /etc/php.d/20-sysvshm.ini, /etc/php.d/20-tokenizer.ini, /etc/php.d/20-xml.ini, /etc/php.d/20-xmlwriter.ini, /etc/php.d/20-xsl.ini, /etc/php.d/30-pdo_sqlite.ini, /etc/php.d/30-xmlreader.ini
PHP API	20250925

8. Configure NAT gateway in public subnet and connect to private instance.

VPC

→ NAT Gateways

→ Create NAT Gateway

Subnet: Public-Subnet-1

Connectivity type: Public

Elastic IP: Allocate Elastic IP

Step 2 — Modify private route table

VPC

→ Route Tables

→ Private-Route-Table

→ Routes

→ Edit routes

TASK VPC - 1

NAT gateway nat-1b0352901a528048a | MY NAT was created successfully.

nat-1b0352901a528048a / MY NAT

Details

NAT gateway ID
 nat-1b0352901a528048a

NAT gateway ARN
 arn:aws:ec2:us-east-1:567487919764:natgateway/nat-1b0352901a528048a

VPC
 vpc-0bb8c172721640507 / MY VPC

Availability mode
Regional

Connectivity type
Public

Method of EIP allocation
Automatic

State
 Pending

Created
 Saturday, 29 August 2026 at 23:17:13 GMT+5:30

State message [Info](#)
-

Deleted
-

[IP addresses](#) | [Monitoring](#) | [Flow logs](#) | [Tags](#)

Edit routes: rtb-0382bc409c3f72cb7 / PVT RT

Destination
10.0.0.0/24

[Add route](#)

Target

local

NAT Gateway

Use: "nat-1b0352901a528048a"
[nat-1b0352901a528048a](#) (MY NAT)

Status
 Active

Updated routes for rtb-0382bc409c3f72cb7 / PVT RT successfully

[Details](#)

rtb-0382bc409c3f72cb7 / PVT RT

[Actions](#)

Details

[Info](#)

Route table ID
 rtb-0382bc409c3f72cb7

VPC
 vpc-0bb8c172721640507 | MY VPC

Main
 No

Owner ID
 567487919764

Explicit subnet associations
2 subnets

Edge associations
-

[Routes](#) | [Subnet associations](#) | [Edge associations](#) | [Route propagation](#) | [Tags](#) | [Related resources](#)

Routes (2)

Both

Edit routes

< 1 >

Destination	Target	Status	Propagated	Route Origin
0.0.0.0/0	nat-1b0352901a528048a	Blackhole	No	Create Route
10.0.0.0/24	local	Active	No	Create Route Table

TASK VPC - 1

```
HP@Ashish MINGW64 ~/Downloads (master)
$ ssh -i "Devops.pem" ec2-user@ec2-32-199-161-154.compute-1.amazonaws.com

#_
~\_ #####_ Amazon Linux 2023
~\_ #####\
~\_ \###|
~\_ \#/
~\_ V~' ' -> https://aws.amazon.com/linux/amazon-linux-2023
~\_ ._.
~\_ /_/_
~\_ /m/'

Last login: Sat Aug 29 17:27:07 2026 from 103.160.27.55
[ec2-user@ip-10-0-0-38 ~]$ vi test.pem
[ec2-user@ip-10-0-0-38 ~]$ ssh -i test.pem ec2-user@10.0.0.9
The authenticity of host '10.0.0.9 (10.0.0.9)' can't be established.
ED25519 key fingerprint is SHA256:p3mGGTy2UtwWl0SDGt4qFYEb8Bc1LqG3gUoWFWyZsWE.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added '10.0.0.9' (ED25519) to the list of known hosts.
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
@ WARNING: UNPROTECTED PRIVATE KEY FILE! @
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
Permissions 0644 for 'test.pem' are too open.
It is required that your private key files are NOT accessible by others.
This private key will be ignored.
Load key "test.pem": bad permissions
ec2-user@10.0.0.9: Permission denied (publickey,gssapi-keyex,gssapi-with-mic).
[ec2-user@ip-10-0-0-38 ~]$ chmod 400 test.pem
[ec2-user@ip-10-0-0-38 ~]$ ssh -i test.pem ec2-user@10.0.0.9

#_
~\_ #####_ Amazon Linux 2023
~\_ #####\
~\_ \###|
~\_ \#/
~\_ V~' ' -> https://aws.amazon.com/linux/amazon-linux-2023
~\_ ._.
~\_ /_/_
~\_ /m/'

[ec2-user@ip-10-0-0-9 ~]$ |
```

TASK VPC - 1

```
Permissions 0644 for 'test.pem' are too open.  
It is required that your private key files are NOT accessible by others.  
This private key will be ignored.  
Load key "test.pem": bad permissions  
ec2-user@10.0.0.9: Permission denied (publickey,gssapi-keyex,gssapi-with-mic).  
[ec2-user@ip-10-0-0-38 ~]$ chmod 400 test.pem  
[ec2-user@ip-10-0-0-38 ~]$ ssh -i test.pem ec2-user@10.0.0.9
```

```
#_
~\_ ##### Amazon Linux 2023
~~ \_#####\
~~   \###|
~~     \#/    https://aws.amazon.com/linux/amazon-linux-2023
~~       V~' '->
~~~~
~~~~_. _./
~~~~_/ /_/_/
~~~~/_m/'
```

```
[ec2-user@ip-10-0-0-9 ~]$  
[ec2-user@ip-10-0-0-9 ~]$  
[ec2-user@ip-10-0-0-9 ~]$ ping google.com  
PING google.com (192.178.155.113) 56(84) bytes of data:  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=1 ttl=105 time=2.61 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=2 ttl=105 time=1.78 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=3 ttl=105 time=1.69 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=4 ttl=105 time=1.74 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=5 ttl=105 time=1.72 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=6 ttl=105 time=1.73 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=7 ttl=105 time=1.72 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=8 ttl=105 time=1.81 ms  
64 bytes from yuiadrs-in-f113.1e100.net (192.178.155.113): icmp_seq=9 ttl=105 time=1.74 ms
```

9. Install Apache Tomcat in private EC2 and deploy a sample app.

```
cd /opt/
wget https://dlcdn.apache.org/tomcat/tomcat-9/v9.0.121/bin/apache-tomcat-9.0.121.tar.gz
tar -xvf apache-tomcat-9.0.121.tar.gz
cd apache-tomcat-9.0.121
cd bin/
# Update package lists
sudo dnf update -y
# Install OpenJDK 17 Development tools
sudo dnf install java-17-openjdk-devel -y
To Run:
./startup.sh
To Set java home:
to find exact path: sudo update-alternatives --config java
Standard paths for Java 17:
Ubuntu/Debian: /usr/lib/jvm/java-17-openjdk-amd64
RHEL/Rocky: /usr/lib/jvm/java-17-openjdk
```

Apply to Tomcat (bin/setenv.sh):

```
export JAVA_HOME="/usr/lib/jvm/java-17-openjdk-amd64"
```

That command created an **SSH tunnel (port forwarding)** from your laptop to the Tomcat server on the

TASK VPC - 1

private EC2.

```
ssh -i "your-key.pem" -L 8080:10.0.0.9:8080 ec2-user@YOUR_PUBLIC_EC2_IP  
-L 8080:10.0.0.9:8080
```

This is the most important part.

-L means:

Local port forwarding

Once the SSH connection is established, your laptop listens on:

localhost:8080

When you open this in your browser:

<http://localhost:8080>

The screenshot shows a web browser window with the address bar set to `localhost:8080`. The page displays the Apache Tomcat 9.0.121 management interface. At the top, there's a navigation bar with links: Home, Documentation, Configuration, Examples, Wiki, Mailing Lists, and a Find Help button. Below this, a green banner congratulates the user for successfully installing Tomcat. A section titled "Recommended Reading" features a cartoon cat icon and links to "Security Considerations How-To", "Manager Application How-To", and "Clustering/Session Replication How-To". To the right of these links are buttons for "Server Status", "Manager App", and "Host Manager".

Below the recommended reading, there's a "Developer Quick Start" section with links to "Tomcat Setup", "Realms & AAA", "Examples", "Servlet Specifications", and "First Web Application".

The main content area is divided into three columns:

- Managing Tomcat:** Explains security restrictions and provides the path `$CATALINA_HOME/conf/tomcat-users.xml`. It also mentions that in Tomcat 9.0, access to the manager application is split between different users, with a link to "Read more...".
- Documentation:** Links to "Tomcat 9.0 Documentation", "Tomcat 9.0 Configuration", and "Tomcat Wiki". It also provides the path `$CATALINA_HOME/RUNNING.txt`.
- Getting Help:** Links to "FAQ and Mailing Lists" and lists available mailing lists: "tomcat-announce" (important announcements, releases, security vulnerability notifications), "tomcat-users" (user support and discussion), and "tomcat-dev" (development discussions).

Below the Tomcat management page, the browser address bar changes to `localhost:8080/sample/`. The new page is titled "Sample 'Hello, World' Application" and features a cartoon cat icon. The text on the page states: "This is the home page for a sample application used to illustrate the source directory organization of a web application utilizing the principles outlined in the Servlet specification." It then says: "To prove that they work, you can execute either of the following links:" followed by a bulleted list:

- To a [JSP page](#).
- To a [servlet](#).

TASK VPC - 1

10. Configure VPC flow logs and store the logs in S3 and CloudWatch.

A. Flow Logs → S3

VPC

→ Your VPC

→ Select DevOps-VPC

→ Flow logs

→ Create flow log

B. Flow Logs → CloudWatch

VPC

→ DevOps-VPC

→ Flow logs

→ Create flow log

→ Create a Cloud watch log

→ copy that log name paste in flow log

→ Create iam policy and role to attach flow log

→ then Create

Policy myvpc-flowlogs-cloudwatch created.

Policies (1571) [Info](#)

A policy is an object in AWS that defines permissions.

Filter by Type

All types

Policy name

Type

Used as

Amazon S3

Buckets

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (1) [Info](#)

Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

1

Name	AWS Region	Creation date
myvpc-flowlogs321	US East (N. Virginia) us-east-1	August 30, 2026, 11:25:10 (UTC+05:30)

myvpc-flowlogs321 [Info](#)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Bucket overview

Bucket ARN copied

AWS Region

US East (N. Virginia) us-east-1

AWS resource Name (ARN)

arn:aws:s3:::myvpc-flowlogs321

Creation date

August 30, 2026, 11:25:10 (UTC+05:30)

TASK VPC - 1

Successfully created flow log for the following resource:

- vpc-0bb8c172721640507

Explore integration options

fl-0886cb792fc87c237 / MY VPC - FLOW LOGS

Actions

Details

Flow log ID

fl-0886cb792fc87c237

Name

MY VPC - FLOW LOGS

State

Active

Creation Time

Sunday, August 30, 2026 at 11:29:53 GMT+5:30

Destination Type

s3

Destination Name

myvpc-flowlogs321

IAM Role

-

Cross Account IAM Role

-

Traffic Type

All

Max Aggregation Interval

1 minute

Log Format

Default

Tag field specifications

-

File Format

Plain text

Hive Compatible Partitions

Not enabled

Partition Logs

Daily

Amazon S3

Buckets

myvpc-flowlogs321

myvpc-flowlogs321

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Objects (1)

Copy S3 URI

Copy URL

Download

Open

Delete

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need

Find objects by prefix

Name

Type

Last modified

Size

AWSLogs/

Folder

-

Amazon S3

Buckets

myvpc-flowlogs321

AWSLogs/

567487919764/

vpcflowlogs/

us-east-1/

2026/

08/

30/

30/

Objects

Properties

Objects (1/1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

☒

Name

Type

Last modified

Size

Storage class

☒

567487919764_vpcflowlogs_us-east-1_fl-0886cb792fc87c237_20260830T0600Z_6597d183.log.gz

gz

August 30, 2026, 11:34:39 (UTC+05:30)

2.5 KB

Standard

TASK VPC - 1

us-east-1.console.aws.amazon.com

MY Sites

Search

Properties

1)

fundamental entities stored

ts by prefix

487919764_vpcflowlogs_u

792fc87c237_2026083070

33.log.gz

git:important_commands

git-commands.txt

VPC CIDR.txt

PVT inst Tormact to acces

567487919764_vf

File

Edit

View

version

account-id

interface-id

srcaddr

dstaddr

srcport

dstport

protocol

packets

bytes

start

end

action

log-status

2 567487919764 - 35.203.211.25 54.82.15.66 49186 8095 6 1 44 1788069612 1788069612 ACCEPT OK

2 567487919764 eni-005b3a9a10700ebfb 35.203.210.79 10.0.0.38 55544 8333 6 1 44 1788069619 1788069636 REJECT OK

2 567487919764 eni-005b3a9a10700ebfb 35.203.210.226 10.0.0.38 49331 9738 6 1 44 1788069619 1788069636 REJECT OK

2 567487919764 eni-005b3a9a10700ebfb 45.33.94.76 10.0.0.38 53745 4333 6 1 44 1788069619 1788069636 REJECT OK

2 567487919764 eni-005b3a9a10700ebfb 122.191.115.237 10.0.0.38 13477 6379 6 1 60 1788069619 1788069636 REJECT OK

2 567487919764 - 162.216.149.15 52.2.138.252 51653 3120 6 1 44 1788069628 1788069638 ACCEPT OK

2 567487919764 - 198.235.24.150 52.2.138.252 56948 9080 6 1 44 1788069628 1788069638 ACCEPT OK

2 567487919764 - - - - - 1788069599 1788069630 - NODATA

2 567487919764 - 35.203.210.128 52.2.138.252 55162 30405 6 1 44 1788069613 1788069613 ACCEPT OK

2 567487919764 - 189.112.173.116 54.82.15.66 0 0 1 2 56 1788069616 1788069616 ACCEPT OK

2 567487919764 - 193.163.125.189 54.82.15.66 44244 993 6 1 44 1788069632 1788069632 ACCEPT OK

2 567487919764 - 35.203.210.126 54.82.15.66 49606 40854 6 1 44 1788069620 1788069620 ACCEPT OK

2 567487919764 - 184.105.247.235 54.82.15.66 59755 24156 6 1 40 1788069642 1788069649 ACCEPT OK

2 567487919764 - 198.235.24.212 54.82.15.66 41838 12346 17 1 95 1788069642 1788069649 ACCEPT OK

2 567487919764 - 162.216.150.74 52.2.138.252 50074 85 6 1 44 1788069607 1788069630 ACCEPT OK

2 567487919764 - 216.25.89.127 52.2.138.252 52032 9242 6 1 44 1788069607 1788069630 ACCEPT OK

2 567487919764 - 216.25.89.94 54.82.15.66 55147 8092 6 1 44 1788069644 1788069644 ACCEPT OK

2 567487919764 eni-005b3a9a10700ebfb 45.56.83.110 10.0.0.38 50475 8282 6 1 52 1788069637 1788069659 REJECT OK

2 567487919764 eni-005b3a9a10700ebfb 77.90.185.16 10.0.0.38 65105 22 6 1 40 1788069637 1788069659 ACCEPT OK

2 567487919764 eni-005b3a9a10700ebfb 10.0.0.38 77.90.185.16 22 65105 6 4 176 1788069637 1788069659 ACCEPT OK

2 567487919764 eni-005b3a9a10700ebfb 162.216.149.207 10.0.0.38 49291 14172 6 1 44 1788069637 1788069659 REJECT OK

2 567487919764 eni-005b3a9a10700ebfb 162.216.150.3 10.0.0.38 55157 17214 6 1 44 1788069637 1788069659 REJECT OK

2 567487919764 eni-005b3a9a10700ebfb 205.210.31.8 10.0.0.38 52151 993 6 1 44 1788069637 1788069659 REJECT OK

2 567487919764 - 35.203.211.200 54.82.15.66 54974 9490 6 1 44 1788069644 1788069660 ACCEPT OK

2 567487919764 - 64.62.197.49 54.82.15.66 60777 4002 6 1 40 1788069644 1788069660 ACCEPT OK

2 567487919764 - 71.6.233.244 52.2.138.252 4040 4040 6 1 40 1788069643 1788069663 ACCEPT OK

2 567487919764 - 147.185.132.173 52.2.138.252 55068 19090 6 1 44 1788069643 1788069663 ACCEPT OK

2 567487919764 - 147.185.133.25 52.2.138.252 57170 121 17 1 76 1788069643 1788069663 ACCEPT OK

2 567487919764 - 216.25.89.117 52.2.138.252 52168 37286 6 1 44 1788069643 1788069663 ACCEPT OK

2 567487919764 - - - - - 1788069646 1788069677 - NODATA

2 567487919764 eni-0307e120857f9fb43 - - - - - 1788069626 1788069657 - NODATA

2 567487919764 - - - - - 1788069628 1788069672 - NODATA

> myvpc-flow-cloudwatch

Log group "myvpc-flow-cloudwatch" has been created.

myvpc-flow-cloudwatch

Log group details

Log class

Info

Standard

ARN

arn:aws:logs:us-east-1:567487919764:log-group:myvpc-flow-cloudwatch:*

Creation time

Now

Retention

Never expire

Stored bytes

-

Metric filters

0

Subscription filters

0

Contributor Insights rules

-

KMS key ID

-

Deletion protection

Off

Data protection

-

Sensitive data count

-

TASK VPC - 1

Successfully created flow log for the following resource:

- vpc-0bb8c172721640507

fl-06fe9ddb1a8ddeebc / MYflow-cloud watch

Details

Flow log ID

fl-06fe9ddb1a8ddeebc

Name

MYflow-cloud watch

State

Active

Creation Time

Sunday, August 30, 2026 at 12:08:08 GMT+5:30

Destination Type

cloud-watch-logs

Destination Name

myvpc-flow-cloudwatch

IAM Role

arn:aws:iam::567487919764:role/myvpc-flowlog-role

Cross Account IAM Role

Traffic Type

All

Max Aggregation Interval

1 minute

Log Format

Default

Tag field specifications

File Format

Hive Compatible Partitions

Partition Logs

Log streams (2)

By default, we only load the most recent log streams.

Filter log streams or try prefix search

Exact match

Show expired

Info

Log stream

Last event time

eni-005b3a9a10700ebfb-all

2026-08-30 06:39:50 (UTC)

nat-1b8e2648a612b7e5f-all

2026-08-30 06:38:53 (UTC)

CloudWatch > Log management > myvpc-flow-cloudwatch > eni-005b3a9a10700ebfb-all

CloudWatch

Favorites and recents

Lambda Insights

SageMaker Insights

EC2 Resource Health

Logs

Log Management

Log Analytics

Log Anomalies

Metrics

Query Studio

Classic metrics

Explorer

Streams

Network Monitoring

Flow monitors

Internet monitors

Synthetic monitors

Log group "myvpc-flow-cloudwatch" has been created.

Log events

You can use the filter bar below to search for and match terms, phrases, or values in your log events.

Filter events - press enter to search

Clear

1m

30m

1h

12h

Custom

UTC timezone

Display

Timestamp

Message

No older events at this moment.

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 35.203.211.15 10.0.0.38 49599 9066 6 1 44 1788071990 1788072016 REJECT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 44.201.148.133 10.0.0.38 123 51120 17 1 76 1788071990 1788072016 ACCEPT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 10.0.0.38 44.201.148.133 51120 123 17 1 76 1788071990 1788072016 ACCEPT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 66.132.186.55 10.0.0.38 50397 2362 17 1 42 1788071990 1788072016 REJECT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 85.217.140.48 10.0.0.38 51277 48561 6 1 52 1788071990 1788072016 REJECT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 85.239.149.72 10.0.0.38 58317 22 6 2 80 1788071990 1788072016 ACCEPT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 10.0.0.38 85.239.149.72 22 58317 6 7 308 1788071990 1788072016 ACCEPT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 192.161.49.2 10.0.0.38 38511 8800 6 1 40 1788071990 1788072016 REJECT OK

2026-08-30T06:39:50.000Z 2 567487919764 eni-005b3a9a10700ebfb 204.76.203.4 10.0.0.38 1801 25564 6 1 48 1788071990 1788072016 REJECT OK

2026-08-30T06:40:25.000Z 2 567487919764 eni-005b3a9a10700ebfb 13.214.173.166 10.0.0.38 0 1 1 28 1788072026 1788072045 REJECT OK

2026-08-30T06:40:25.000Z 2 567487919764 eni-005b3a9a10700ebfb 34.38.222.137 10.0.0.38 56175 80 6 1 44 1788072026 1788072045 ACCEPT OK

Sunith