

The Carole King and James Taylor Story — QUICK LINK

Memorial Hall · DiGiCo Quantum 225 · 2026-09-28 · Rev 1.0 Deep Think

Click any row to jump. Page numbers are MASTER pages — the reader's bookmark sidebar carries the same map.

DOCUMENTS

Cover	p 2
Input List	p 3
EQ Rationale	p 21
What changed — and why	p 21
Question round / decisions	p 22
Reverb — Seventh Heaven	p 22
Research & Method	p 23

EQ PAGES — BY SECTION AND CHANNEL (SHOW PACKET)

PIANO				p 6				
1 Piano Hi		p6	2 Piano Lo		p7	3 Piano Mon		p8
13 Pno Rec Hi		p9	14 Pno Rec Lo		p10			

GUITAR

p 11

4 Dan Gtr	p11
-----------	-----

DRUMS

p 12

5 Stomp	p12
---------	-----

VOCALS

p 13

6 Dan	p13	7 Phoebe Pno	p14	8 Phoebe DS	p15
41 Dan W1	p16	42 Phoebe W2	p17		

AMBIENT

p 18

57 Above Stage	p18	58 Floor Crowd	p19	59 Balcony Crwd	p20
----------------	-----	----------------	-----	-----------------	-----

EQ RATIONALE — BY SECTION

PIANO	p25	GUITAR	p25	DRUMS	p25
VOCALS	p26	PIANO	p26	VOCALS	p27
AMBIENT	p27				

The Carole King and James Taylor Story

FOH CHANNEL EQ SETUP — DiGiCo Quantum 225

Show	The Carole King and James Taylor Story
Show Date	2026-09-28
Venue	Memorial Hall
Console	DiGiCo Quantum 225
Channels	15
FOH Engineer	Brian Lloyd
Monitor Engineer	Brian Lloyd (wedges from FOH)
Show Time	TBD
Rev	Rev 1.0 Deep Think

DOCUMENT CONTENTS

1. Cover Page — show, venue, and personnel
2. Input List — color-coded full channel patch sheet
3. Patching — AES and Local inputs sorted by port
4. EQ Setup — 15 channels for DiGiCo Quantum 225
5. Reference — EQ structure, pan guide, bus grouping, soundcheck order

SHOW STYLE: Two nights, 09-28 and 09-30. Two voices, one C3, one guitar. Keep it warm, keep it dry-ish, let the room sing.

The Carole King and James Taylor Story

VENUE: Memorial Hall

DATE: 2026-09-28

REV: Rev 1.0 Deep Think

FOH: Brian Lloyd

MON: Brian Lloyd (wedges from FOH)

SHOW TIME: TBD

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
■ PIANO						
1	Piano Hi	DPA 4099 CORE+ Extreme SPL	Millennia HV-3D-8 ch 1 → R1 (line)	✓	Clip	P-clip on the plate around G5, just past the dampers, 25–30 cm over the strings, rear null up at the lid. 48V at the HV-3, not the stagebox; stagebox input LINE, console gain unity. Pan LEFT (audience view, matches the MK4 pair). PA + multitrack. PIANO GROUP EQ (dial by hand, linked stereo; the patcher writes input EQ only): HPF 40 · B4 FLAT · B3 FLAT · B2 –3 @ 300 Hz Q2.0 · B1 –3 @ 125 Hz Q2.0. COMP (group): Purple thr for 2–3 dB GR ratio 2:1 atk 30ms rel 300ms.
2	Piano Lo	DPA 4099 CORE+ Extreme SPL	Millennia HV-3D-8 ch 2 → R2 (line)	✓	Clip	P-clip over C2–G2, a third of the way down the strings past the dampers, same height and angle as ch 1, at least 30 cm from it. 48V at the HV-3; stagebox LINE, gain unity. Pan RIGHT. PA + multitrack. See ch 1 for the piano group EQ.
3	Piano Mon	Shure SM57	R3		—	WEDGES ONLY: Mix 1 (Phoebe) and Mix 2 (Dan) as needed. Unassign from LR. Pointing down into plate hole H2 (see C3 Placement PDF); try H3 if the treble is thin. No 48V.
■ GUITAR						
4	Dan Gtr	Rupert Neve Designs RNDI	2-ch sub 1		DI	■ TOUR — confirm at load-in · RNDI on INSTRUMENT. Guitar and pickup are Dan's; pickup type confirm at load-in (assumed undersaddle piezo).
■ DRUMS						


Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
5	Stomp	Rupert Neve Designs RNDI	2-ch sub 2		DI	■ TOUR — confirm at load-in · RNDI on INSTRUMENT. Dan's stomp box, piezo assumed, confirm at load-in. Dial the HPF at 24 dB/oct.
■ VOCALS						
6	Dan	Wireless 1 (Shure Beta 58A)	Wireless 1		—	House Wireless 1, multed to fader 41. Mix 2.
7	Phoebe Pno	Neumann KMS 105	R4	✓	Boom	Input list said 'KSM105'; Brian confirmed Neumann KMS 105. 48V. Boom over the C3 keyboard. Mix 1.
8	Phoebe DS	Wireless 2 (Shure Beta 58A)	Wireless 2		—	House Wireless 2, multed to fader 42. Mix 1 (her wedges travel with her or add a DS wedge; confirm at load-in).
■ PIANO						
13	Pno Rec Hi	Schoeps CMC6 + MK4	Millennia HV-3D-8 ch 3 → R5 (line)	✓	Boom	RECORD ONLY: unassign from LR and all mixes; multitrack pre-EQ. MK4 ORTF bar at the bend, 17 cm / 110°, 15–20 cm inside the rim under the lid edge, 30–40 cm over the strings (C3 Placement PDF). 48V at the HV-3; stagebox LINE, gain unity. Pan L (audience view, highs left).
14	Pno Rec Lo	Schoeps CMC6 + MK4	Millennia HV-3D-8 ch 4 → R6 (line)	✓	Boom	RECORD ONLY: unassign from LR and all mixes; multitrack pre-EQ. MK4 ORTF bar at the bend, 17 cm / 110°, 15–20 cm inside the rim under the lid edge, 30–40 cm over the strings (C3 Placement PDF). 48V at the HV-3; stagebox LINE, gain unity. Pan R (audience view, highs left).
■ VOCALS						
41	Dan W1	Wireless 1 (Shure Beta 58A)	Wireless 1		—	Receiver home fader, multed to ch 6. Same curve; ride the digital trim here. Keep it OUT of LR (ch 6 carries the PA) unless ch 6 is lost.

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
42	Phoebe W2	Wireless 2 (Shure Beta 58A)	Wireless 2		—	Receiver home fader, muled to ch 8. Same curve; ride the digital trim here. Keep it OUT of LR (ch 8 carries the PA) unless ch 8 is lost.
■ AMBIENT						
57	Above Stage	Line Audio OM1 (pair)	House crowd rig	✓	—	Flown 18' above stage, 12' apart. Fixed Memo crowd EQ from the KB (R35). Record; not in LR.
58	Floor Crowd	Deity S-Mic 2 (pair)	House crowd rig	✓	—	Under the main-floor PA, aimed into the audience. Fixed Memo crowd EQ from the KB (R35). Record; not in LR.
59	Balcony Crwd	Line Audio CM4 (pair)	House crowd rig	✓	—	Balcony, rear-facing ORTF, 34' from the Deity pair. Fixed Memo crowd EQ from the KB (R35). Record; not in LR.

PIANO

Ch 1 | Piano Hi

Mic: DPA 4099 CORE+ Extreme SPL

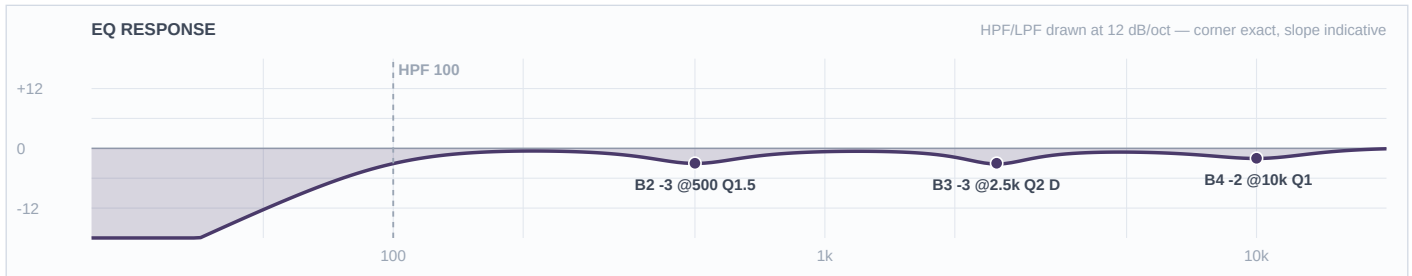


Mic Notes: Near-flat supercardioid: 80 Hz–17 kHz ± 3 dB with a +2 dB soft boost at 10–12 kHz (SOS). R16 lanes: Hi owns the right hand, hammer and top; Lo owns everything under ~200. Mono-sum with ch 2 at line check before touching EQ; flip one if the centre thins.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	10 kHz	Bell	-2 dB	1	
3	2.5 kHz	Bell	-3 dB	2	DYNAMIC: thr=-20dB atk=5ms rel=150ms — bites only on peaks
2	500 Hz	Bell	-3 dB	1.5	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: This is the half of the piano Phoebe's voice lives on top of. The -2 at 10k takes back the capsule's own +2 so a bright C3 reads as the warm Tapestry piano, not a classical sparkle. The dynamic -3 at 2.5k only bites when she digs in or the lid throws her wedge and vocal back into the mic, which is where this mic hears them most. -3 at 500 clears the treble-side honk. HPF 100 leaves the left hand to ch 2. Room treatment (125, 300) sits once on the piano group, not twice on the channels.

Ch 2 | Piano Lo

Mic: DPA 4099 CORE+ Extreme SPL

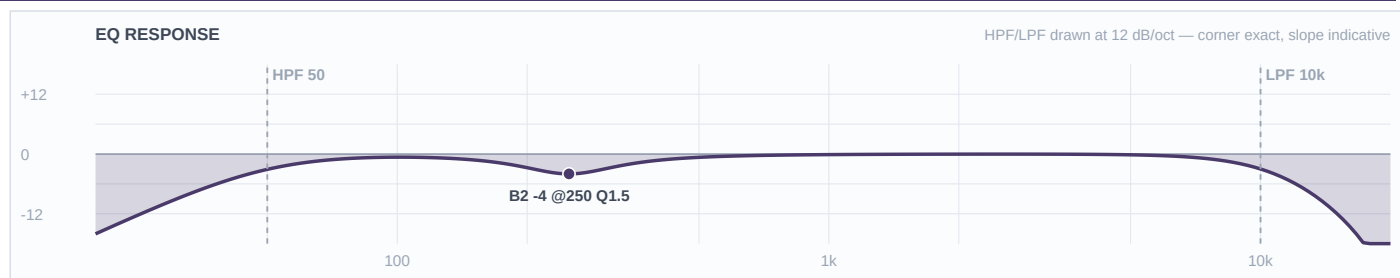


Mic Notes: Same capsule as ch 1. Lo owns the bottom; the LPF 10k hands the top to ch 1 so the hammer and vocal bleed aren't counted twice. At 25–30 cm proximity is barely in play (it only rises inside 20 cm, SOS).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	50 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	—	OFF	—	—	Flat
2	250 Hz	Bell	-4 dB	1.5	
1	—	OFF	—	—	Flat
HC	10 kHz	HC	—	—	Low-pass

Engineer Notes: Carole King's left hand is the bass player in this show: rolling octaves under 'I Feel the Earth Move' and 'It's Too Late'. So the HPF stays at 50 and nothing gets boosted. The one cut is -4 at 250, the wound-string box that stacks on Memo's 250–315 mode. The group's -3 at 125 and -3 at 300 do the room work.

Ch 3 | Piano Mon

Mic: Shure SM57

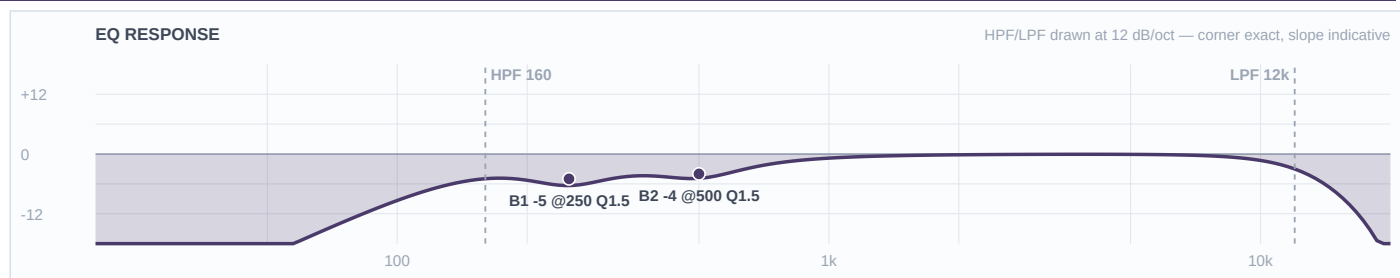


Mic Notes: Shure: presence rise around 4–6 kHz (~+5 dB) and 6–10 dB of proximity below 100 Hz up close. Down in the plate hole the soundboard makes it boomy. Leave the top alone; the capsule already gives the hammers.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	160 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	—	OFF	—	—	Flat
2	500 Hz	Bell	-4 dB	1.5	
1	250 Hz	Bell	-5 dB	1.5	
HC	12 kHz	HC	—	—	Low-pass

Engineer Notes: This channel only has to give Phoebe pitch and time in her wedges without ever feeding back through the DPAs. HPF 160 and -5 at 250 remove the soundboard boom and the hardwood stage's build-up. -4 at 500 is the honk a dynamic makes inside a grand. Nothing is added at 4–6k because the 57 already carries its own +5 there.

Ch 13 | Pno Rec Hi

Mic: Schoeps CMC6 + MK4

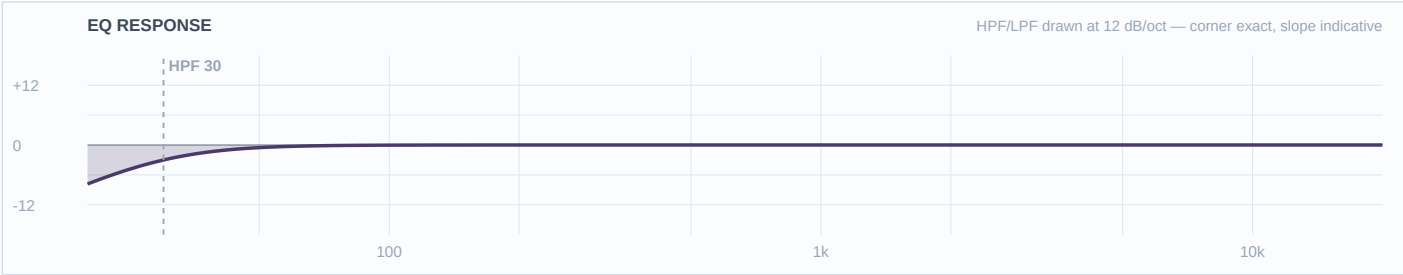


Mic Notes: Schoeps: flat with a slight rise around 10 kHz (~+2 dB) to offset room HF loss; very consistent off-axis. Blended with ch 1/2 in post. Time-align by ear; the pair sits within about 1 ms of the DPAs.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	30 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	—	OFF	—	—	Flat
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: Record-only. The multitrack takes it pre-EQ, so any EQ here would only colour a solo check. HPF 30 for rumble and nothing else. Its job in post is the natural whole-instrument piano under the close DPAs.

Ch 14 | Pno Rec Lo

Mic: Schoeps CMC6 + MK4

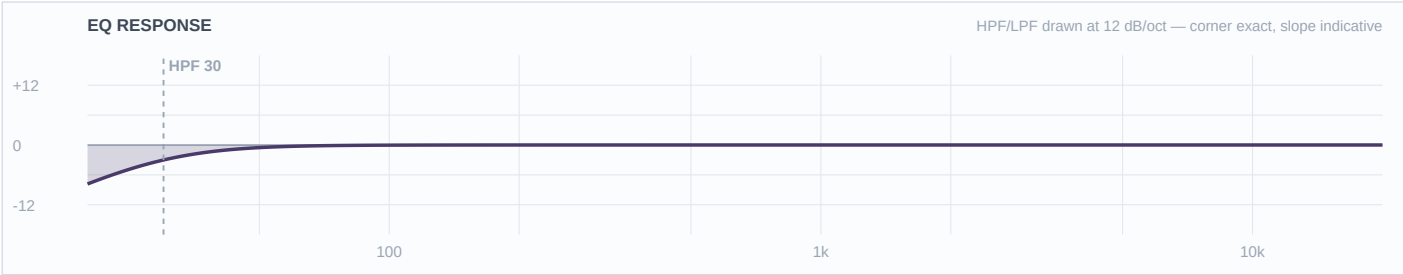


Mic Notes: Schoeps: flat with a slight rise around 10 kHz (~+2 dB) to offset room HF loss; very consistent off-axis. Blended with ch 1/2 in post. Time-align by ear; the pair sits within about 1 ms of the DPAs.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	30 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	—	OFF	—	—	Flat
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: Record-only. The multitrack takes it pre-EQ, so any EQ here would only colour a solo check. HPF 30 for rumble and nothing else. Its job in post is the natural whole-instrument piano under the close DPAs.

Ch 4 | Dan Gtr

Mic: Rupert Neve Designs RNDI

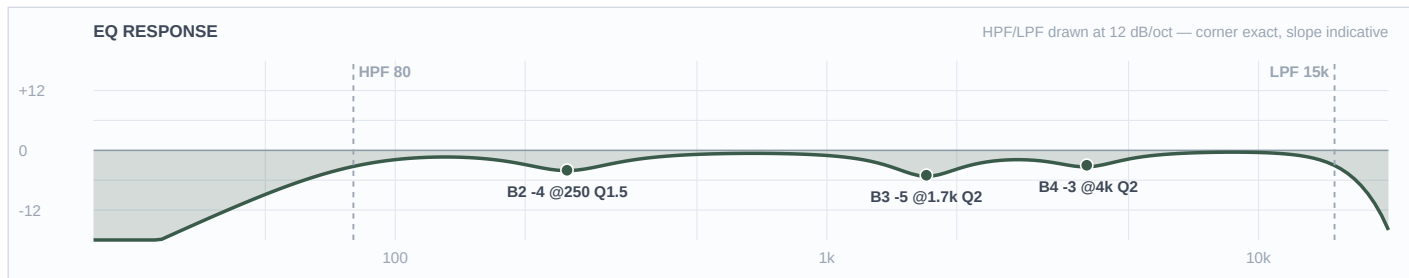


Mic Notes: The RNDI is ± 0.25 dB from 28 Hz to 60 kHz (RND/SOS), so the curve is all pickup. Assumed piezo. If it turns out to be a mic or blend system, halve the 1.7k cut. COMP: Blue | in | thr for 3–4 dB GR | ratio 3:1 | atk 15ms | rel 150ms. A Neve-style comp rounds the piezo quack peaks (Gearspace piezo thread), and the 15 ms attack lets the pick transient through.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	80 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-3 dB	2	
3	1.7 kHz	Bell	-5 dB	2	
2	250 Hz	Bell	-4 dB	1.5	
1	—	OFF	—	—	Flat
HC	15 kHz	HC	—	—	Low-pass

Engineer Notes: In Dan's half of the show this guitar is the whole band. Taylor's alternating thumb carries the bass line, so the HPF sits at 80, not the 120 you'd use in a band. The primary cut is -5 at 1.7k, the piezo quack (R13). -3 at 4k removes the zing, and -4 at 250 clears the box that Memo's 250–315 would otherwise make worse.

Ch 5 | Stomp

Mic: Rupert Neve Designs RNDI

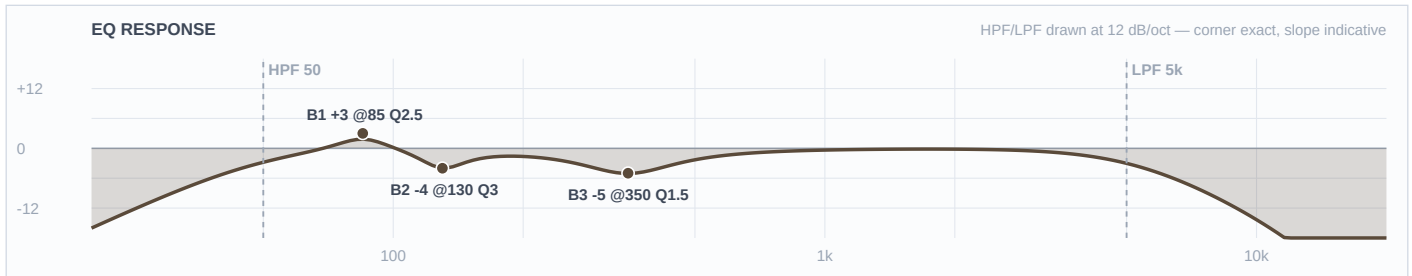

Mic Notes: The RNDI is flat, so the piezo is the whole voice. Piezo stomp boxes lack real thump and read as cardboard at 300–400 (AGF piezo-stomp thread; Kopf). GATE: Gate | in | thr just above foot-rest noise | atk 1ms | hold 60ms | rel 150ms | range=20. That keeps shuffling and floor handling out of the sub region between hits.


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	50 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	350 Hz	Bell	-5 dB	1.5	
2	130 Hz	Bell	-4 dB	3	
1	85 Hz	Bell	+3 dB	2.5	
HC	5 kHz	HC	—	—	Low-pass

Engineer Notes: The only kick in the show, and it should be felt, not heard. The +3 at 85 (Q 2.5) is the one boost, placed in the gap between Memo's 63 and 125 modes. The piezo's documented lack of low thump clears it under R15. -4 at 130 (Q 3) keeps the 125 mode from blooming. -5 at 350 removes the cardboard. The LPF at 5k takes off the piezo click so nobody hears a clacky box. If the room still booms at 63, slope the HPF steeper rather than cutting more.

■ VOCALS ■

Ch 6 | Dan

Mic: Wireless 1 (Shure Beta 58A)

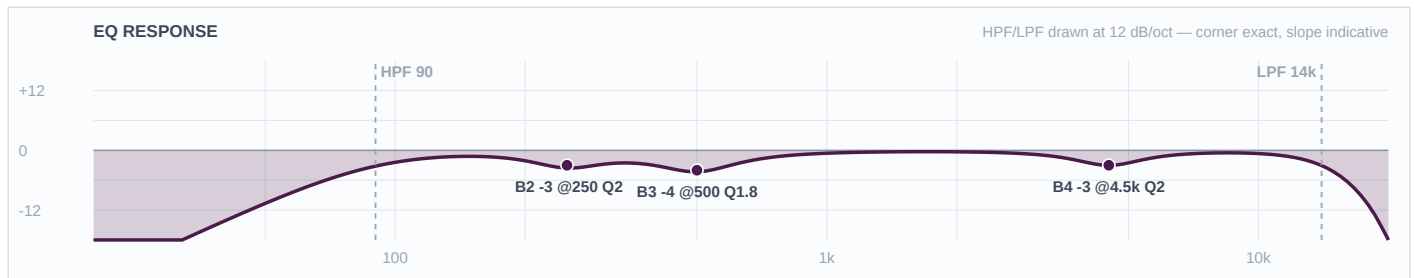


Mic Notes: Shure: rise above 3k with peaks near 4k and 10k, lows rolled off for proximity. COMP: Purple | in | thr for 3–5 dB GR | ratio 3:1 | atk 10ms | rel 200ms. Optical because a soft crooner wants smoothing, not grab.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	4.5 kHz	Bell	-3 dB	2	
3	500 Hz	Bell	-4 dB	1.8	
2	250 Hz	Bell	-3 dB	2	
1	—	OFF	—	—	Flat
HC	14 kHz	HC	—	—	Low-pass

Engineer Notes: Dan sings like Taylor, soft and close. His warmth is in 200–350, so this curve protects it. The male slot is HPF 90, the lowest of the three vocals. -4 at 500 is his box lane, deliberately different from Phoebe's 700 on ch 8 so duets don't share a notch. -3 at 250 is only there because Memo's 250–315 mode doubles it. -3 at 4.5k trims the Beta's presence peak, which goes steely on a quiet voice with the gain up. B1 is written FLAT so the wireless template curve doesn't leak in. Cuts only (R9).

Ch 7 | Phoebe Pno

Mic: Neumann KMS 105

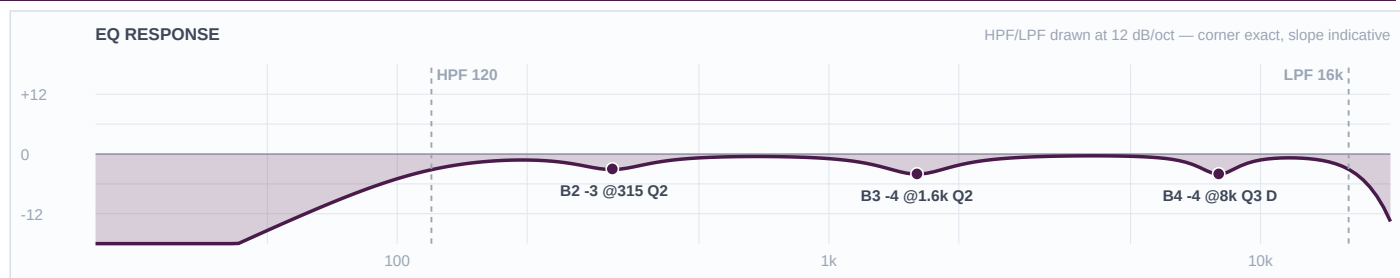


Mic Notes: Flat 500 Hz–7 kHz with about +5 dB at 12 kHz (RecordingHacks, higherhz); internal HPF –3 dB at 120 Hz. COMP: Purple | in | thr for 3–5 dB GR | ratio 3:1 | atk 10ms | rel 200ms. Gentle, because breathiness is her sound.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	120 Hz	LC	—	—	High-pass
4	8 kHz	Bell	-4 dB	3	DYNAMIC: thr=-20dB atk=2ms rel=100ms — bites only on peaks
3	1.6 kHz	Bell	-4 dB	2	
2	315 Hz	Bell	-3 dB	2	
1	—	OFF	—	—	Flat
HC	16 kHz	HC	—	—	Low-pass

Engineer Notes: Reviews describe Phoebe as breathy and light, so the KMS's 12k air stays: it carries her. Sibilance only gets a dynamic –4 at 8k when it's actually there. –4 at 1.6k is the nasal band on this capsule (KB). –3 at 315 does double duty: Memo's mode, and the piano's low-mids bouncing off the open lid into her mic. The HPF at 120 slots her above Dan (90) and matches the capsule's own roll-off. Cuts only.

Ch 8 | Phoebe DS

Mic: Wireless 2 (Shure Beta 58A)

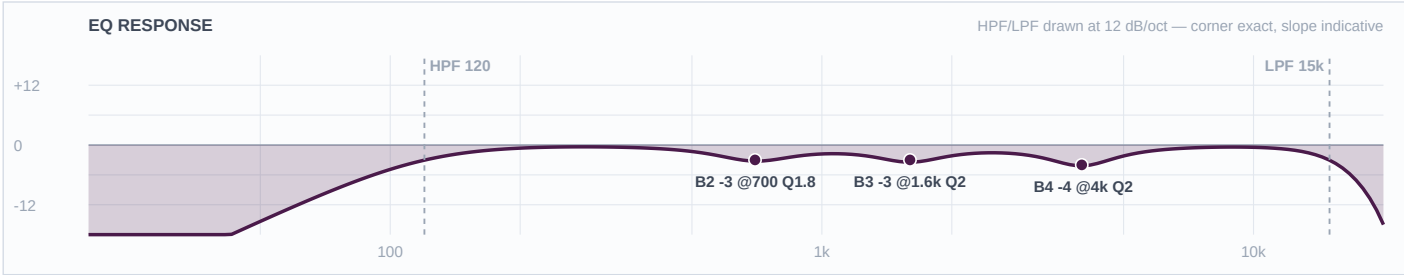


Mic Notes: Same Beta 58A data as ch 6: peaks near 4k and 10k. COMP: Purple | in | thr for 3–5 dB GR | ratio 3:1 | atk 10ms | rel 200ms.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	120 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-4 dB	2	
3	1.6 kHz	Bell	-3 dB	2	
2	700 Hz	Bell	-3 dB	1.8	
1	—	OFF	—	—	Flat
HC	15 kHz	HC	—	—	Low-pass

Engineer Notes: Same singer as ch 7 on a different capsule. The goal is for her to sound like one voice when she walks off the piano. The KMS has air on top and a flat 4k; the Beta 58A peaks at 4k, so this curve trims -4 at 4k and leaves 10k for the breath. -3 at 1.6k matches her nasal cut on ch 7. -3 at 700 is the Beta's box, kept away from Dan's 500 on ch 6. HPF 120, same as ch 7. Cuts only.

Ch 41 | Dan W1

Mic: Wireless 1 (Shure Beta 58A)

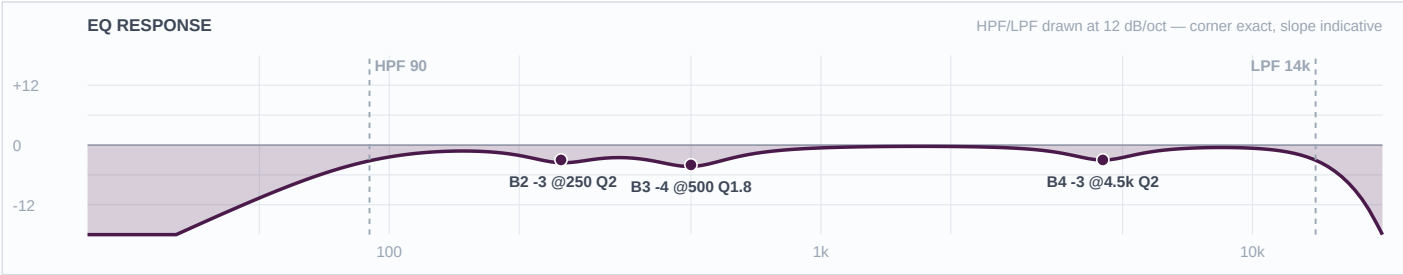


Mic Notes: Mult of ch 6, same capsule notes.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	4.5 kHz	Bell	-3 dB	2	
3	500 Hz	Bell	-4 dB	1.8	
2	250 Hz	Bell	-3 dB	2	
1	—	OFF	—	—	Flat
HC	14 kHz	HC	—	—	Low-pass

Engineer Notes: Identical to ch 6 so a swap mid-show is seamless.

Ch 42 | Phoebe W2

Mic: Wireless 2 (Shure Beta 58A)

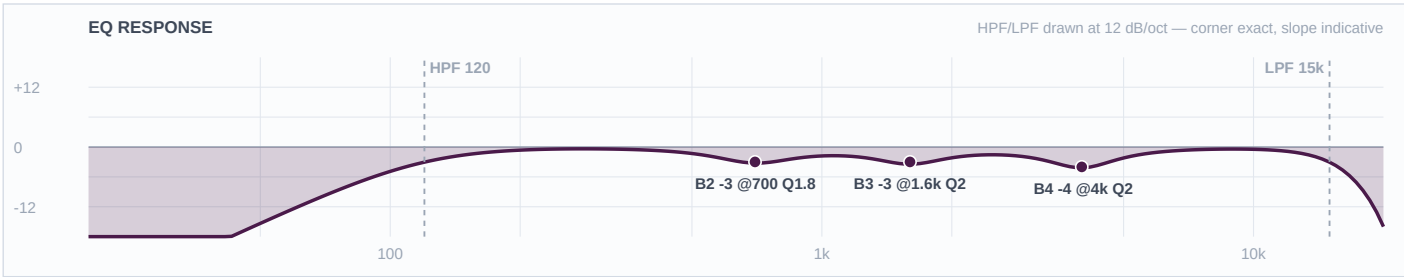

Mic Notes: Mult of ch 8, same capsule notes.


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	120 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-4 dB	2	
3	1.6 kHz	Bell	-3 dB	2	
2	700 Hz	Bell	-3 dB	1.8	
1	—	OFF	—	—	Flat
HC	15 kHz	HC	—	—	Low-pass

Engineer Notes: Identical to ch 8 so a swap mid-show is seamless.

■ AMBIENT ■

Ch 57 | Above Stage

Mic: Line Audio OM1 (pair)

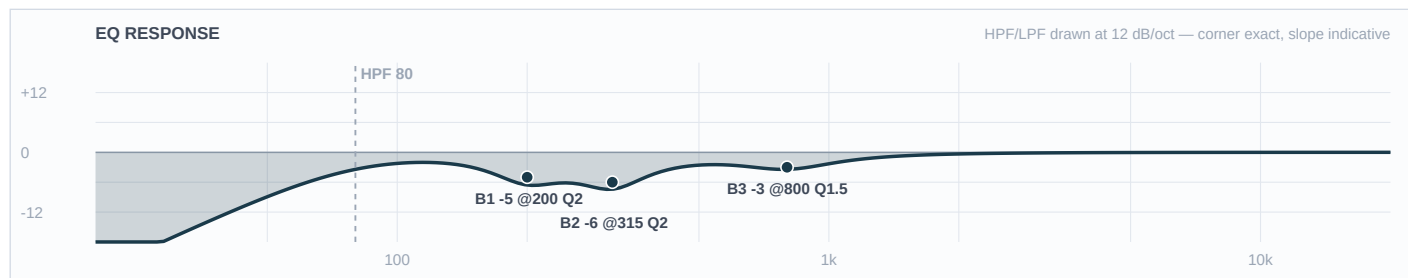


Mic Notes: Fixed house rig. EQ is locked in venue-memorial-hall, not re-derived.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	80 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	800 Hz	Bell	-3 dB	1.5	
2	315 Hz	Bell	-6 dB	2	
1	200 Hz	Bell	-5 dB	2	
HC	—	HC	—	—	No LPF

Engineer Notes: KB crowd curve as written: it treats Memo's 200/315 build-up in the room air. Unchanged show to show.

Ch 58 | Floor Crowd

Mic: Deity S-Mic 2 (pair)

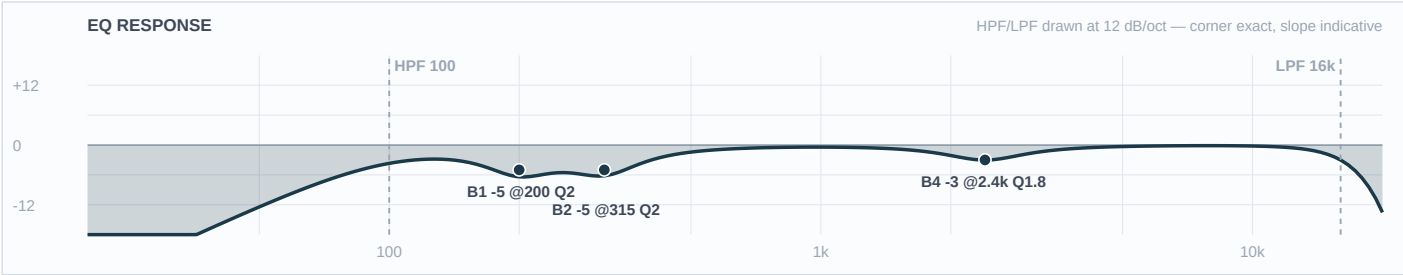


Mic Notes: Fixed house rig. EQ is locked in venue-memorial-hall, not re-derived.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	2.4 kHz	Bell	-3 dB	1.8	
3	—	OFF	—	—	Flat
2	315 Hz	Bell	-5 dB	2	
1	200 Hz	Bell	-5 dB	2	
HC	16 kHz	HC	—	—	Low-pass

Engineer Notes: KB crowd curve as written: it treats Memo's 200/315 build-up in the room air. Unchanged show to show.

Ch 59 | Balcony Crwd

Mic: Line Audio CM4 (pair)

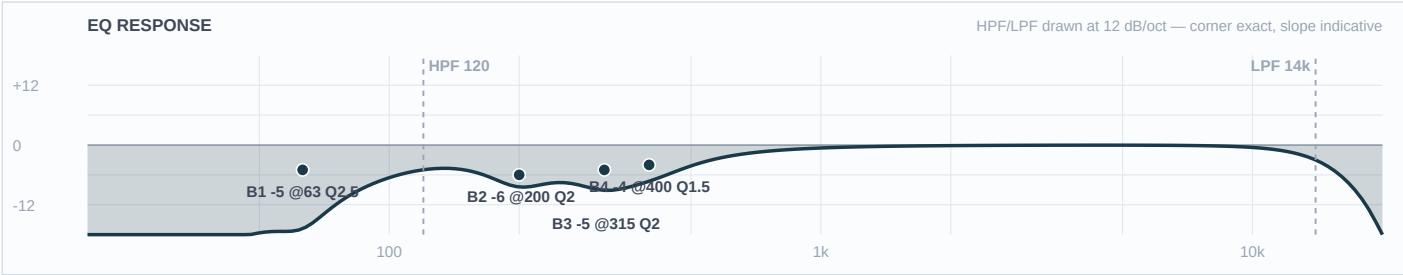

Mic Notes: Fixed house rig. EQ is locked in venue-memorial-hall, not re-derived.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	120 Hz	LC	—	—	High-pass
4	400 Hz	Bell	-4 dB	1.5	
3	315 Hz	Bell	-5 dB	2	
2	200 Hz	Bell	-6 dB	2	
1	63 Hz	Bell	-5 dB	2.5	
HC	14 kHz	HC	—	—	Low-pass

Engineer Notes: KB crowd curve as written: it treats Memo's 200/315 build-up in the room air. Unchanged show to show.

The Carole King and James Taylor Story — FOH EQ Rationale

Memorial Hall · DiGiCo Quantum 225 · 2026-09-28 · Rev 1.0 Deep Think

THE ARTIST — AND WHAT IT MEANS FOR THIS MIX

Phoebe Katis (piano, vocals) and Dan Clews (fingerstyle acoustic, vocals) have toured this 'show-umentary' for ten years, framed around King and Taylor's 1970 Troubadour sets. The set is the hits: Fire and Rain, Sweet Baby James, I Feel the Earth Move, Natural Woman, You've Got a Friend. Reviews call Phoebe 'breathy and formal' beside King's chest voice, and say Dan channels Taylor's soft baritone and picking convincingly. For the mix: two quiet voices, a piano that is the whole band in her half, a guitar that is the whole band in his. Nothing is loud, so gain before feedback and bleed off the open lid drive every choice.

THE ROOM — AND THE CONDITIONS ON THE NIGHT

Memo, 556 seats, RT60 about 1.6 s. The 125 and 250–315 modes are treated once, on the piano group and the vocal low-mids. The room supplies the long tail, so every reverb decay is pulled 30–40%.

MONITORS

MIX 1 Phoebe (wedge ×2 (L/R of piano bench)) · MIX 2 Dan (wedge)

REVERB NOTE

CLA Epic is not yet hosted at Memo. Delay times are fixed ms until a tempo host with tap tempo exists. Epic has no ducker, so duck its return from the console if needed.

What changed from the KB default / prior rev — and why

- Ch 7 mic: input list 'KSM105' → Neumann KMS 105 (Brian confirmed).
- Ch 13/14 renamed Pno Rec Hi / Pno Rec Lo; the ORTF pair runs highs left from the bend, so the piano group pans audience view (Hi left) to match.
- Piano EQ split: per-mic correction on ch 1/2, Memo room EQ + comp on the linked piano group (hand-dialed, documented on ch 1).
- Ch 6/8 on house Wireless 1/2, multed to faders 41/42; wireless template curve overridden, B1 written FLAT.
- Reverbs: 7th Heaven + CLA Epic only (new Memo standard, Brian 2026-09-26).

Question round — what was asked, what Brian decided

- Locker: piano = DPA 4099 pair (PA) + SM57 plate hole (wedges) + Schoeps MK4 ORTF (record) — Brian, this session.
- Preamps: all four piano condensers on Millennia HV-3D-8 ch 1–4; SM57 on the DQ stagebox — Brian.
- Q: ch 7 'KSM105'? → Brian: Neumann KMS 105.
- Q: ch 6/8 wired or wireless? → Brian: house Wireless 1 / 2.
- Q: ch 13/14 naming → Brian: ORTF puts highs on the left and lows on the right; names Hi/Lo kept as Pno Rec Hi / Lo.
- Q: piano group pan → Brian: audience view, Hi left.
- Q: SM57 plate-hole THIN → Brian: research + KB update.
- Q: stomp box THIN → Brian: research + KB update (narrow +3 @ 85 between modes).
- Q: crowd rig EQ into MD → Brian: yes, KB as-is.
- Q: CLA Epic host → Brian: not set up yet; delays written in fixed ms.
- Locker forks ch 6/7/8: specified mics are first-call locker matches — silent pass. Ch 4/5 DI exempt; crowd rig exempt.

Reverb — Seventh Heaven Pro (100% wet returns)

- **VOCAL — Chambers 1 / #17 Sunset Chamber** | Settings: Decay 1.3s (factory 2.15s) · PreDelay 25ms · VLF –20dB (factory) · E/L Max Early · Late –12dB · Late Rolloff 6kHz | In-plugin EQ: Master Filter LC 200 Hz on the return; Ducker Reverb mode, thr –22dB | Why: The KB's first pick for an acoustic lead vocal, and the warm, era-right sound for 'You've Got a Friend' and 'Fire and Rain'. Decay pulled about 40% because Memo supplies 1.6 s of its own.
- **VOCAL — Chambers 1 / #10 Vocal Chamber** | Settings: Decay 1.0s (factory 1.60s) · PreDelay 20ms · VLF –18dB (from –10dB factory) · E/L Max Early · Late –14dB · Late Rolloff 7kHz | In-plugin EQ: LC 200 Hz; Ducker Reverb mode thr –22dB | Why: Tighter and more present, for the up-tempo tunes ('I Feel the Earth Move', 'Country Road') where Sunset would blur the words.
- **VOCAL — CLA Epic — Slap → Plate (custom, no factory anchor)** | Settings: Slap: VSO 15 IPS (≈ 110–120 ms, EQ curve loads with the speed) · Feedback 0% · Mod off · Out + route to Plate A at –10 dB. Plate: Pre-delay 30 ms · RT 1.2 s · RT Low ×0.8 · RT High ×0.9. HP 200 Hz / LP 8 kHz on both. Mono-to-Stereo component, Wet 100%. | In-plugin EQ: Processor HP/LP as listed; no ducker in Epic, so put a light sidechain duck on the return from the vocal groups if needed | Why: 1970s records put a tape slap on the JT vocal. This gives Dan that sound, and the Plate adds the record sheen without the room's length. Use it on Dan's numbers, with Sunset Chamber for Phoebe's.
- **INSTRUMENT — Rooms 1 / #10 Large Wooden** | Settings: Decay 0.75s (factory 1.20s) · PreDelay 10ms · VLF –15dB · E/L Max Early · Late –16dB · Late Rolloff 7kHz | In-plugin EQ: LC 150 Hz on the return | Why: The KB pick for acoustic guitar and folk instruments. It gives the DI'd guitar the air a mic would have picked up, short enough to keep the fingerpicking articulate.
- **INSTRUMENT — Halls 1 / #32 Piano Hall** | Settings: Decay 1.2s (factory 2.00s) · PreDelay 24ms (factory) · VLF –18dB (from –8dB factory) · E/L Max Early · Late –14dB · Late Rolloff 6kHz | In-plugin EQ: LC 200 Hz; stereo send from the piano group | Why: The close DPAs hear almost no room. Piano Hall puts the C3 back in the hall at a low send, with VLF cut hard so the left hand doesn't stack on Memo's 125.
- **GENERAL — CLA Epic — Throw (custom, no factory anchor)** | Settings: Throw: Tap 1 375 ms / Tap 2 500 ms (fixed ms until a tempo host exists) · Feedback 25% · Offset 10% · Trigger ON · route Out + Hall C at –12 dB. Hall: Pre-delay 40 ms · RT 1.8 s · RT Low ×0.7 · RT High ×0.8. HP 250 Hz / LP 6 kHz. | In-plugin EQ: HP/LP on the Throw processor; Trigger fires only on held button | Why: Word throws on the last line of a chorus ('you've got a friend'). Trigger means nothing gets delayed unless you ask for it, which keeps a soft duo clean.
- **USING THEM TOGETHER** — Phoebe's songs run Sunset Chamber, and Dan's run CLA Epic Slap → Plate for the era slap. Vocal Chamber takes over on the up-tempo tunes from both of them. On the duets, both vocals feed Sunset Chamber and the slap drops out. Large Wooden sits under the guitar and Piano Hall under the piano group at low sends. Everything is VLF-cut and 150–250 Hz low-cut on the returns, so none of it feeds Memo's 125. The Epic Throw is a button, not a bed.

RESEARCH — WHAT WAS LOOKED UP, AND WHAT IT CHANGED

GENRE — VERIFIED FIRST, WITH NAMED EVIDENCE			THE GIG	
1970s singer-songwriter folk-pop — Night Owl Shows show page (Troubadour 1970 framing), BroadwayWorld BroadStage review 2026-05-08, Harris Center listing, Kent Stage live video.			Two nights at Memo: 2026-09-28 and 2026-09-30, seated theatre show with history segments between songs.	
CH	SOURCE / MIC	WHAT THE RESEARCH FOUND	V	TRACE — base · equip · genre · artist · venue
1/2	C3 piano (Hi/Lo) DPA 4099 CORE+ Extreme SPL	80 Hz–17 kHz ± 3 dB at 20 cm with a +2 dB soft boost at 10–12 kHz; proximity rises inside 20 cm <i>Sound On Sound, DPA 4060 & 4099 Core+ review; SOS 'Miking Up A Piano Concert With DPA'; Gearspace pair-vs-bus EQ thread</i>	AGREE	base flat capsule; box 250 on Lo (–4), honk 500 on Hi (–3) equip C3 bright top + capsule +2 @ 10–12k → Hi –2 @ 10k genre 70s singer-songwriter piano = warm, LH kept: Lo HPF 50, no boosts artist Phoebe's vocal/wedge off the lid → Hi dynamic –3 @ 2.5k venue Memo 125/300 moved to the piano group (–3/–3), not doubled on channels
3	C3 plate hole (wedges) Shure SM57	Presence rise $\sim +5$ dB around 4–6 kHz; proximity +6–10 dB below 100 Hz up close <i>Shure SM57 user guide; ProSoundWeb piano-miking articles (cut ~ 250 for boom)</i>	THIN	base boom from soundboard proximity → –5 @ 250 equip inside a grand = honk → –4 @ 500 genre wedge intelligibility, no tone work: HPF 160 artist Phoebe needs pitch/time only — no top added venue hardwood stage build-up covered by the 250 cut; no change beyond
4	Acoustic guitar DI Rupert Neve Designs RNDI	RNDI ± 0.25 dB 28 Hz–60 kHz; piezo quack is the fix, notch it <i>Sound On Sound RNDI review; Rupert Neve Designs spec; Gearspace 'EQ'ing piezo pickups'</i>	AGREE	base piezo quack –5 @ 1.7k, zing –3 @ 4k equip pickup unknown, piezo assumed; halve 1.7k if a mic/blend system genre acoustic folk (R13): quack is the primary cut artist Taylor alternating-thumb bass → HPF 80, not 120 venue Memo 250–315 → –4 @ 250
5	Stomp box DI Rupert Neve Designs RNDI	Piezo stomp boxes lack deep thump; cardboard box at 300–400 Hz; weight 60–100 Hz <i>Acoustic Guitar Forum piezo stomp-box thread; Kopf Percussion ToeKicker notes; RND spec</i>	THIN	base –5 @ 350 cardboard equip piezo thin lows → +3 @ 85 Q2.5 (R15 cleared) genre folk pulse felt, not heard → LPF 5k artist Dan's quarter-note pulse on up-tempo JT tunes only venue Memo 63/125: boost placed between modes, –4 @ 130 Q3, HPF 50 steep
6	Dan vocal Shure Beta 58A (Wireless 1)	Rise above 3 kHz with peaks near 4 kHz and 10 kHz; bass rolled off for proximity <i>Shure Beta 58A spec sheet; Gearspace 'Fitting baritone vocals'</i>	AGREE	base trim capsule 4k peak –3 @ 4.5k; box –4 @ 500 equip house wireless — template curve overridden, B1 FLAT genre soft singer-songwriter: warmth 200–350 protected artist JT baritone, close and quiet → HPF 90 venue Memo 250 → –3 @ 250
7	Phoebe vocal at piano Neumann KMS 105	Flat 500 Hz–7 kHz, about +5 dB at 12 kHz; internal HPF –3 dB at 120 Hz <i>RecordingHacks KMS 105; higherhz KMS 105 review</i>	AGREE	base nasal –4 @ 1.6k; 12k air kept equip none notated — no change genre cuts only; air is part of the style artist breathy voice (BroadwayWorld) → sibilance only dynamic –4 @ 8k venue Memo 315 + lid bleed → –3 @ 315
8	Phoebe vocal downstage Shure Beta 58A (Wireless 2)	Peaks near 4 kHz and 10 kHz (same Shure data as ch 6) <i>Shure Beta 58A spec sheet</i>	AGREE	base 4k peak –4 @ 4k; box –3 @ 700 equip house wireless — B1 FLAT genre cuts only artist match her KMS tone: nasal –3 @ 1.6k, HPF 120 venue no change (no band below 400 needed)

CH	SOURCE / MIC	WHAT THE RESEARCH FOUND	V	TRACE — base · equip · genre · artist · venue
13/14	C3 record pair Schoeps CMC6 + MK4	Flat with a slight rise around 10 kHz (about +2 dB); consistent off-axis <i>Schoeps MK 4 product page</i>	AGREE	base flat, record-only equip HV-3 transparent — no change genre no change artist no change venue no change (multitrack pre-EQ); HPF 30 rumble only

Reconciliation — every web vs KB fork, and how it was settled

- SM57 piano plate hole: KB has no row → THIN; web consensus used, KB row queued (Brian: research + update).
- Stomp box DI: KB has no row → THIN; web values used with Memo mode placement, KB row queued.
- No other web↔KB disagreements.

KB write-back candidates — no article covers these yet

- mic-shure-sm57: piano plate-hole monitor row (HPF 160, −5 @ 250, −4 @ 500, no top).
- eq-starting-points: stomp box (piezo) DI row (+3 @ 85 between Memo modes, −4 @ 130, −5 @ 350, LPF 5k).
- eq-starting-points: high/low spaced piano pair — per-mic correction on channels, room EQ on the linked group.
- reverb-reference-memo: CLA Epic section (controls from Waves user guide v2; Slap/Plate vocal, Throw with Trigger; no ducker) + 7th Heaven/Epic as the only Memo reverbs.
- mic-library: Millennia HV-3D-8 (8 ch) as an outboard front end; no KB page yet.

PIANO

Ch 1 | Piano Hi · DPA 4099 CORE+ Extreme SPL

HPF 100 | LPF off || B4 -2@10 kHz Q1 BELL B3 -3@2.5 kHz Q2 BELL +DEQ B2 -3@500 Hz Q1.5 BELL B1 flat

Near-flat supercardioid: 80 Hz–17 kHz ± 3 dB with a +2 dB soft boost at 10–12 kHz (SOS). R16 lanes: Hi owns the right hand, hammer and top; Lo owns everything under ~200.

Mono-sum with ch 2 at line check before touching EQ; flip one if the centre thins.

This is the half of the piano Phoebe's voice lives on top of. The –2 at 10k takes back the capsule's own +2 so a bright C3 reads as the warm Tapestry piano, not a classical sparkle. The dynamic –3 at 2.5k only bites when she digs in or the lid throws her wedge and vocal back into the mic, which is where this mic hears them most. –3 at 500 clears the treble-side honk. HPF 100 leaves the left hand to ch 2. Room treatment (125, 300) sits once on the piano group, not twice on the channels.

Ch 2 | Piano Lo · DPA 4099 CORE+ Extreme SPL

HPF 50 | LPF 10000 || B4 flat B3 flat B2 -4@250 Hz Q1.5 BELL B1 flat

Same capsule as ch 1. Lo owns the bottom; the LPF 10k hands the top to ch 1 so the hammer and vocal bleed aren't counted twice. At 25–30 cm proximity is barely in play (it only rises inside 20 cm, SOS).

Carole King's left hand is the bass player in this show: rolling octaves under 'I Feel the Earth Move' and 'It's Too Late'. So the HPF stays at 50 and nothing gets boosted. The one cut is –4 at 250, the wound-string box that stacks on Memo's 250–315 mode. The group's –3 at 125 and –3 at 300 do the room work.

Ch 3 | Piano Mon · Shure SM57

HPF 160 | LPF 12000 || B4 flat B3 flat B2 -4@500 Hz Q1.5 BELL B1 -5@250 Hz Q1.5 BELL

Shure: presence rise around 4–6 kHz (~+5 dB) and 6–10 dB of proximity below 100 Hz up close. Down in the plate hole the soundboard makes it boomy. Leave the top alone; the capsule already gives the hammers.

This channel only has to give Phoebe pitch and time in her wedges without ever feeding back through the DPAs. HPF 160 and –5 at 250 remove the soundboard boom and the hardwood stage's build-up. –4 at 500 is the honk a dynamic makes inside a grand. Nothing is added at 4–6k because the 57 already carries its own +5 there.

GUITAR

Ch 4 | Dan Gtr · Rupert Neve Designs RNDI ■ TOUR — confirm at load-in

HPF 80 | LPF 15000 || B4 -3@4 kHz Q2 BELL B3 -5@1.7 kHz Q2 BELL B2 -4@250 Hz Q1.5 BELL B1 flat

The RNDI is ± 0.25 dB from 28 Hz to 60 kHz (RND/SOS), so the curve is all pickup. Assumed piezo. If it turns out to be a mic or blend system, halve the 1.7k cut. COMP: Blue | in | thr for 3–4 dB GR | ratio 3:1 | atk 15ms | rel 150ms. A Neve-style comp rounds the piezo quack peaks (Gearspace piezo thread), and the 15 ms attack lets the pick transient through.

In Dan's half of the show this guitar is the whole band. Taylor's alternating thumb carries the bass line, so the HPF sits at 80, not the 120 you'd use in a band. The primary cut is –5 at 1.7k, the piezo quack (R13). –3 at 4k removes the zing, and –4 at 250 clears the box that Memo's 250–315 would otherwise make worse.

DRUMS

Ch 5 | Stomp · Rupert Neve Designs RNDI ■ TOUR — confirm at load-in

HPF 50 | LPF 5000 || B4 flat B3 -5@350 Hz Q1.5 BELL B2 -4@130 Hz Q3 BELL B1 +3@85 Hz Q2.5 BELL

The RNDI is flat, so the piezo is the whole voice. Piezo stomp boxes lack real thump and read as cardboard at 300–400 (AGF piezo-stomp thread; Kopf). GATE: Gate | in | thr just above foot-rest noise | atk 1ms | hold 60ms | rel 150ms | range=20. That keeps shuffling and floor handling out of the sub region between hits.

The only kick in the show, and it should be felt, not heard. The +3 at 85 (Q 2.5) is the one boost, placed in the gap between Memo's 63 and 125 modes. The piezo's documented lack of low thump clears it under R15. -4 at 130 (Q 3) keeps the 125 mode from blooming. -5 at 350 removes the cardboard. The LPF at 5k takes off the piezo click so nobody hears a clacky box. If the room still booms at 63, slope the HPF steeper rather than cutting more.

VOCALS

Ch 6 | Dan · Wireless 1 (Shure Beta 58A)

HPF 90 | LPF 14000 || B4 -3@4.5 kHz Q2 BELL B3 -4@500 Hz Q1.8 BELL B2 -3@250 Hz Q2 BELL B1 flat

Shure: rise above 3k with peaks near 4k and 10k, lows rolled off for proximity. COMP: Purple | in | thr for 3–5 dB GR | ratio 3:1 | atk 10ms | rel 200ms. Optical because a soft crooner wants smoothing, not grab.

Dan sings like Taylor, soft and close. His warmth is in 200–350, so this curve protects it. The male slot is HPF 90, the lowest of the three vocals. -4 at 500 is his box lane, deliberately different from Phoebe's 700 on ch 8 so duets don't share a notch. -3 at 250 is only there because Memo's 250–315 mode doubles it. -3 at 4.5k trims the Beta's presence peak, which goes steely on a quiet voice with the gain up. B1 is written FLAT so the wireless template curve doesn't leak in. Cuts only (R9).

Ch 7 | Phoebe Pno · Neumann KMS 105

HPF 120 | LPF 16000 || B4 -4@8 kHz Q3 BELL +DEQ B3 -4@1.6 kHz Q2 BELL B2 -3@315 Hz Q2 BELL B1 flat

Flat 500 Hz–7 kHz with about +5 dB at 12 kHz (RecordingHacks, higherhz); internal HPF -3 dB at 120 Hz. COMP: Purple | in | thr for 3–5 dB GR | ratio 3:1 | atk 10ms | rel 200ms. Gentle, because breathiness is her sound.

Reviews describe Phoebe as breathy and light, so the KMS's 12k air stays: it carries her. Sibilance only gets a dynamic -4 at 8k when it's actually there. -4 at 1.6k is the nasal band on this capsule (KB). -3 at 315 does double duty: Memo's mode, and the piano's low-mids bouncing off the open lid into her mic. The HPF at 120 slots her above Dan (90) and matches the capsule's own roll-off. Cuts only.

Ch 8 | Phoebe DS · Wireless 2 (Shure Beta 58A)

HPF 120 | LPF 15000 || B4 -4@4 kHz Q2 BELL B3 -3@1.6 kHz Q2 BELL B2 -3@700 Hz Q1.8 BELL B1 flat

Same Beta 58A data as ch 6: peaks near 4k and 10k. COMP: Purple | in | thr for 3–5 dB GR | ratio 3:1 | atk 10ms | rel 200ms.

Same singer as ch 7 on a different capsule. The goal is for her to sound like one voice when she walks off the piano. The KMS has air on top and a flat 4k; the Beta 58A peaks at 4k, so this curve trims -4 at 4k and leaves 10k for the breath. -3 at 1.6k matches her nasal cut on ch 7. -3 at 700 is the Beta's box, kept away from Dan's 500 on ch 6. HPF 120, same as ch 7. Cuts only.

PIANO

Ch 13 | Pno Rec Hi · Schoeps CMC6 + MK4

HPF 30 | LPF off || B4 flat B3 flat B2 flat B1 flat

Schoeps: flat with a slight rise around 10 kHz (~+2 dB) to offset room HF loss; very consistent off-axis. Blended with ch 1/2 in post. Time-align by ear; the pair sits within about 1 ms of the DPAs.

Record-only. The multitrack takes it pre-EQ, so any EQ here would only colour a solo check. HPF 30 for rumble and nothing else. Its job in post is the natural whole-instrument piano under the close DPAs.

Ch 14 | Pno Rec Lo · Schoeps CMC6 + MK4

HPF 30 | LPF off || B4 flat B3 flat B2 flat B1 flat

Schoeps: flat with a slight rise around 10 kHz (~+2 dB) to offset room HF loss; very consistent off-axis. Blended with ch 1/2 in post. Time-align by ear; the pair sits within about 1 ms of the DPAs.

Record-only. The multitrack takes it pre-EQ, so any EQ here would only colour a solo check. HPF 30 for rumble and nothing else. Its job in post is the natural whole-instrument piano under the close DPAs.

VOCALS

Ch 41 | Dan W1 · Wireless 1 (Shure Beta 58A)

HPF 90 | LPF 14000 || B4 -3@4.5 kHz Q2 BELL B3 -4@500 Hz Q1.8 BELL B2 -3@250 Hz Q2 BELL B1 flat

Mult of ch 6, same capsule notes.

Identical to ch 6 so a swap mid-show is seamless.

Ch 42 | Phoebe W2 · Wireless 2 (Shure Beta 58A)

HPF 120 | LPF 15000 || B4 -4@4 kHz Q2 BELL B3 -3@1.6 kHz Q2 BELL B2 -3@700 Hz Q1.8 BELL B1 flat

Mult of ch 8, same capsule notes.

Identical to ch 8 so a swap mid-show is seamless.

AMBIENT

Ch 57 | Above Stage · Line Audio OM1 (pair)

HPF 80 | LPF off || B4 flat B3 -3@800 Hz Q1.5 BELL B2 -6@315 Hz Q2 BELL B1 -5@200 Hz Q2 BELL

Fixed house rig. EQ is locked in venue-memorial-hall, not re-derived.

KB crowd curve as written: it treats Memo's 200/315 build-up in the room air. Unchanged show to show.

Ch 58 | Floor Crowd · Deity S-Mic 2 (pair)

HPF 100 | LPF 16000 || B4 -3@2.4 kHz Q1.8 BELL B3 flat B2 -5@315 Hz Q2 BELL B1 -5@200 Hz Q2 BELL

Fixed house rig. EQ is locked in venue-memorial-hall, not re-derived.

KB crowd curve as written: it treats Memo's 200/315 build-up in the room air. Unchanged show to show.

Ch 59 | Balcony Crwd · Line Audio CM4 (pair)

HPF 120 | LPF 14000 || B4 -4@400 Hz Q1.5 BELL B3 -5@315 Hz Q2 BELL B2 -6@200 Hz Q2 BELL B1 -5@63 Hz Q2.5 BELL

Fixed house rig. EQ is locked in venue-memorial-hall, not re-derived.

KB crowd curve as written: it treats Memo's 200/315 build-up in the room air. Unchanged show to show.

Piano Rig — Yamaha C3

The Carole King & James Taylor Story · Memorial Hall · 09-28 + 09-30 · full-stick lid · Phoebe's wedges left and right of the bench

Ch	Mic	Position	Preamp	Feeds
1 Piano Hi	DPA 4099 CORE+ Extreme SPL	P-clip on the plate around G5, just past the dampers, 25–30 cm over the strings, angled down, rear null up at the lid	Millennia HV-3D-8 ch 1 → R1 LINE	PA + multitrack · pan L
2 Piano Lo	DPA 4099 CORE+ Extreme SPL	P-clip over C2–G2, a third of the way down the strings past the dampers, same height, at least 30 cm from Hi	HV-3D-8 ch 2 → R2 LINE	PA + multitrack · pan R
3 Piano Mon	Shure SM57	Pointing down into plate hole H2 (try H3 if the treble is thin); no 48V	DQ stagebox R3	Wedges only
13 Pno Rec Hi	Schoeps CMC6 + MK4	ORTF bar (17 cm / 110°) on a boom from outside the bend, 15–20 cm inside the rim under the lid edge, 30–40 cm over the strings, aimed at mid-soundboard behind the dampers	HV-3D-8 ch 3 → R5 LINE	Multitrack only · L (treble)
14 Pno Rec Lo	Schoeps CMC6 + MK4	other capsule of the same bar	HV-3D-8 ch 4 → R6 LINE	Multitrack only · R (bass)

HV-3 channels: 48V ON at the HV-3, OFF at the stagebox; stagebox inputs on LINE, console gain at unity; set the HV-3 stepped gain on her hardest playing with 15–20 dB of headroom. Needs two DPA P-clips (the clip inventory isn't logged in the KB, so check before load-in) and ideally the DAO4099 double cable.

Why this rig

DPA pair for the PA, not the Schoeps MK5 in omni. With a full-stick lid and wedges beside the bench, the lid throws the wedge and vocal straight into the case. Omni inside the piano picks up as much wedge as piano, so it would run out of gain before feedback early and put a smeared, vocal-heavy piano on the multitrack. The 4099's supercardioid pattern at 25–30 cm gives the most direct piano for the gain, with its rear null aimed at the lid. It's near-flat: 80 Hz–17 kHz ± 3 dB with a +2 dB soft boost at 10–12 kHz (Sound On Sound).

SM57 in a plate hole for the wedges. Dropped into a plate opening, it sits under the strings, loud at the mic and shielded by the iron frame, with its null facing up at the lid. That makes it very hard to feed back. It sounds boomy and honky, which doesn't matter in a wedge: HPF 160, –5 at 250, –4 at 500, and nothing added on top because the 57 already has a presence rise around 4–6k. With the DPAs out of the wedges entirely, the piano can't ring through monitors.

Schoeps MK4 ORTF for the record. Tucked under the lid edge at the bend: the lid acts as a roof, the rim shields it from the stage and the wedges fall about 90° off-axis. ORTF gets its width from level differences, so it sums to mono and blends with the spaced DPAs in post without combing. It sits within about 1 ms of the DPAs, so time-align it by ear. The MK4 is the purpose-built cardioid, where the MK5 in cardioid would be a switch-position compromise.

Millennia HV-3 over the AEA TRP2. The HV-3D-8 gives four matched, transformerless channels with large headroom for close-miked hammer transients, so the PA pair and record pair share one clean front end. The TRP2's high-impedance input and 85 dB of gain are built for passive ribbons and don't help condensers with active outputs. It also only has two channels. Keep it for the R88.


EQ split: channels vs piano group. A high/low spaced pair isn't a true stereo pair, so each mic's own fix goes on its channel. Ch 1 gets –2 at 10k, a dynamic –3 at 2.5k for the lid bleed and –3 at 500. Ch 2 gets –4 at 250. The shared room work goes once on the linked piano group: HPF 40, –3 at 300, –3 at 125, and a Purple optical comp at 2:1 (attack 30 ms, release 300 ms) for 2–3 dB of gain reduction. Set the group by hand. The piano pans from the audience's view, Hi left, to match the MK4s.

Line check

Bring each DPA up alone with the EQ flat, then sum them to mono. If the centre thins, flip polarity on one mic or slide the Lo mic a few inches, then leave it alone. For the ORTF pair, have her play a C-major run across the keyboard: highs should come

from the left, lows from the right, with a solid centre. If the middle is thin, rotate the bar a few degrees toward the tail. Keep the DPA cables along the rim, clear of the 57's plate hole and the Schoeps bar.


Reference photos

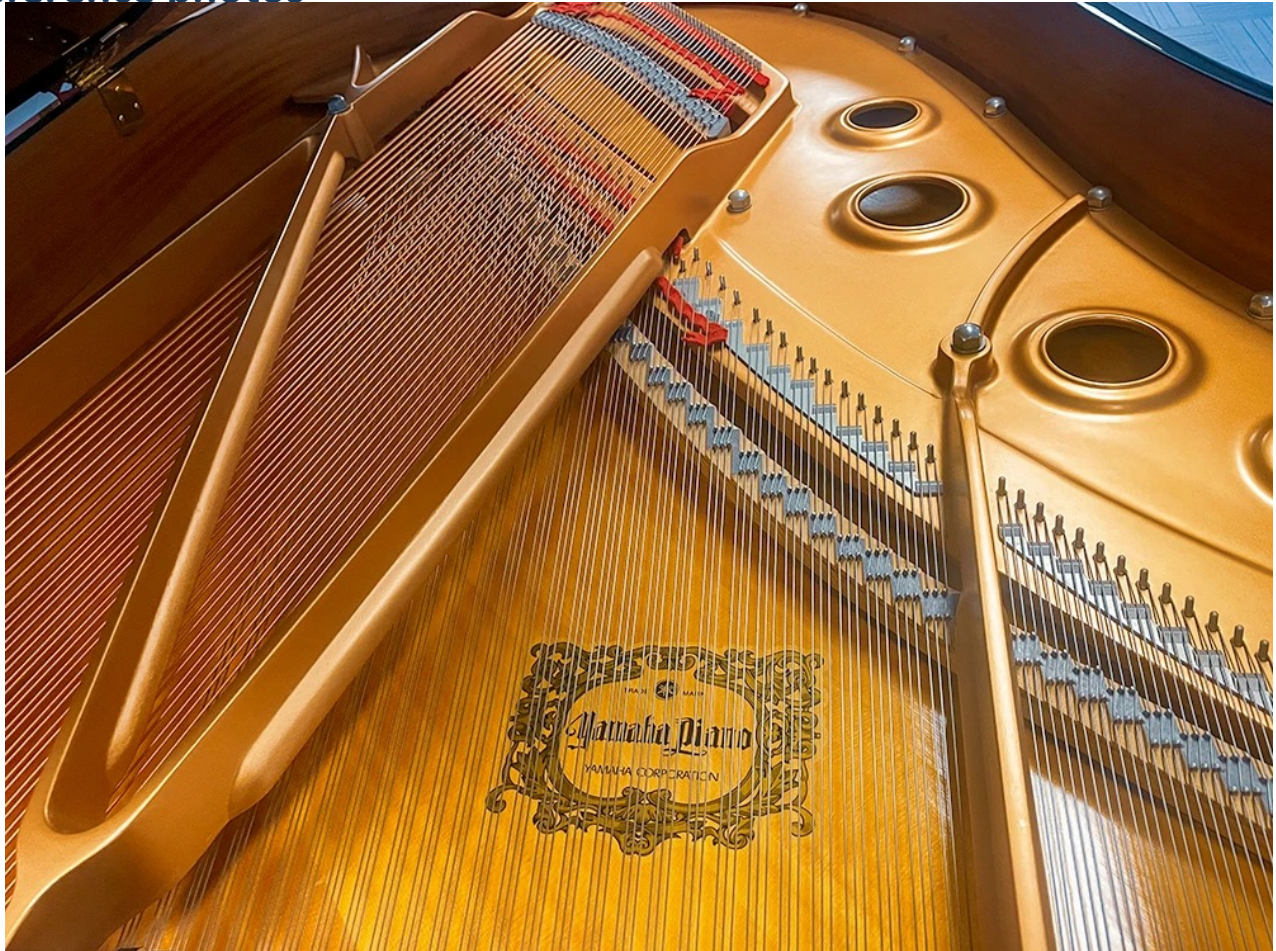

A real Yamaha C3 plate, shot from above the bend looking toward the tail. The plate holes (H1–H4 on the placement diagram) run in an arc along the rim at the tail end. The SM57 goes in the middle hole, H2. Photo supplied by Brian.



A 4099 pair being positioned inside a Yamaha CFX on a live stage, lid on full stick: treble side just behind the dampers, where the Piano Hi mic goes. Photo: Sound On Sound, 'Miking Up A Piano Concert With DPA'.

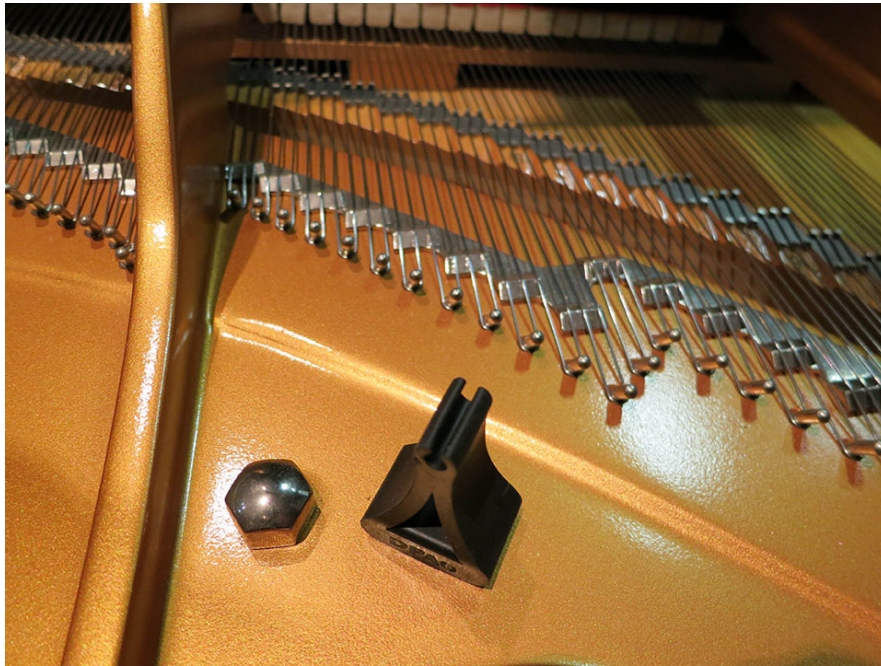

A P-clip magnet mount seated on the plate beside a frame bolt. This is how both DPAs attach. Photo: Sound On Sound (same article).




The 4099 gooseneck angle and height over the strings. DPA's studio shot has both mics in the treble; our pair is spread high/low per the table above. Photo: DPA Microphones, 'How to mic a piano'.

Yamaha C3 piano mics, top-down view

Carole King & James Taylor Story · full-stick lid · side wedges · approx. scale, 186 × 149 cm case · plate holes placed from a real C3 photo · mic spots finalized by ear on site



wedge L

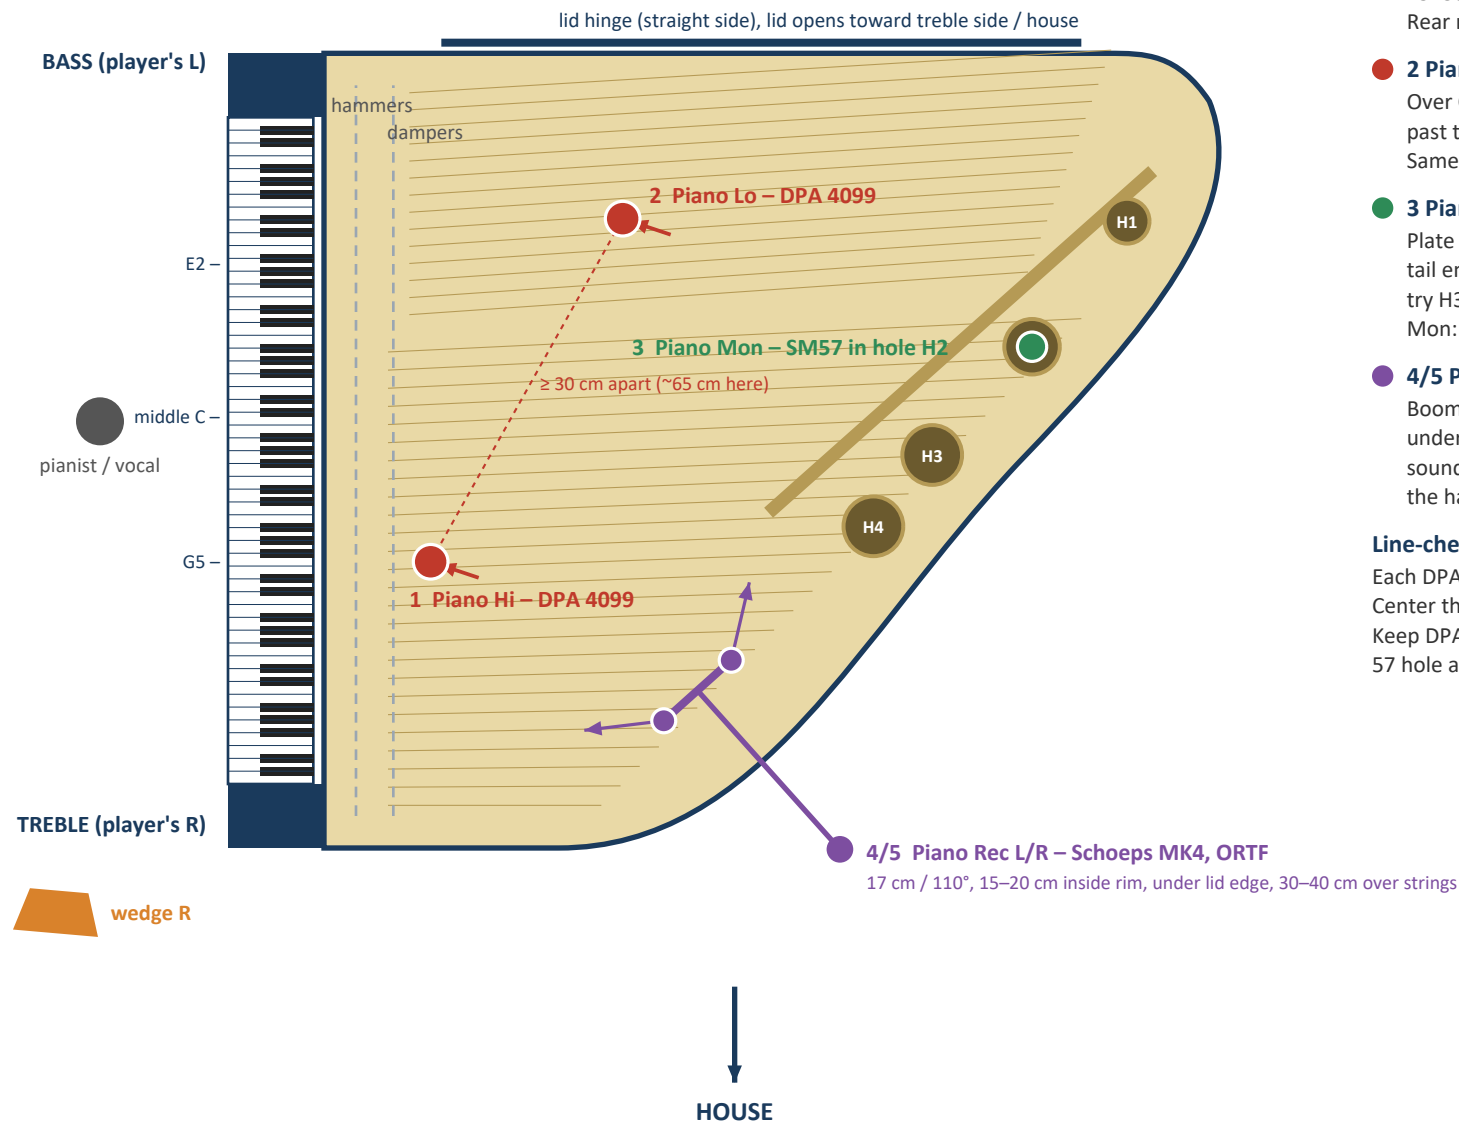

Channels and placement

- **1 Piano Hi · DPA 4099 · PA**
P-clip magnet on plate, just past the dampers around G5 (1.5 oct above mid C). 25–30 cm over strings, angled down. Rear null faces up at the lid.
- **2 Piano Lo · DPA 4099 · PA**
Over C2–G2, about 1/3 down the strings past the dampers, well into the case. Same height and angle as Hi.
- **3 Piano Mon · SM57 · wedges only**
Plate holes run along the rim at the tail end (H1 smallest to H4). Start in H2, try H3. Pointing down.
Mon: HPF 150–180, scoop 300–500.
- **4/5 Piano Rec · MK4 ORTF · multitrack**
Boom from outside the bend, bar under the lid edge, aimed at mid-soundboard behind the dampers, not the hammers. Too wide? Narrow to 90°.

Line-check order

Each DPA alone with EQ flat, then mono-sum. Center thins: flip one or move Lo a few inches. Keep DPA cables along the rim, clear of the 57 hole and the Schoeps bar. Needs 2× P-clips.

Seventh Heaven Pro — Memo presets

The Carole King & James Taylor Story · 09-28 + 09-30 · every instance 100% wet on its own FX return, level from the sends

Load the factory preset, set the values in the row, and save it under the name in the first column. LiquidSonics encrypts its preset files, so these can't be generated like the CLA Epic ones; dial them once and they load like any factory preset afterward.

Save as	Load factory	Decay	PreDelay	VLF	Early / Late	Late Rolloff	Return filter	Ducker	Send from / use
CKJT Vox Sunset	Chambers 1 / #17 Sunset Chamber	1.3 s (factory 2.15)	25 ms	–20 dB (factory)	Max Early · Late –12 dB	6 kHz	LC 200 Hz	Reverb mode, thr –22 dB	Phoebe ch 7/8; both voices on duets. Ballads.
CKJT Vox Chamber	Chambers 1 / #10 Vocal Chamber	1.0 s (factory 1.60)	20 ms	–18 dB (from –10 factory)	Max Early · Late –14 dB	7 kHz	LC 200 Hz	Reverb mode, thr –22 dB	All vocals on up-tempo tunes.
CKJT Gtr Wood	Rooms 1 / #10 Large Wooden	0.75 s (factory 1.20)	10 ms	–15 dB	Max Early · Late –16 dB	7 kHz	LC 150 Hz	off	Dan Gtr ch 4, low send.
CKJT Piano Hall	Halls 1 / #32 Piano Hall	1.2 s (factory 2.00)	24 ms (factory)	–18 dB (from –8 factory)	Max Early · Late –14 dB	6 kHz	LC 200 Hz	off	Piano group (stereo send), low.

Why these settings

Memo adds about 1.6 s of its own decay, so every factory decay is pulled 30–40%: the room does the long tail, the reverb adds placement. VLF is cut hard and every return is low-cut at 150–250 Hz so nothing feeds the room's 125 Hz mode. Early stays at max and Late comes down, because the room supplies the late field. Pre-delay stays at 20–25 ms on the vocals to keep the words ahead of the tail. The ducker (Reverb mode) holds the early reflections between phrases while the tail ducks under the singing.

How they pair with CLA Epic

Phoebe's songs run Sunset Chamber. Dan's run CLA Epic Slap → Plate for the 1970s tape slap. Vocal Chamber takes over on the up-tempo tunes from both of them. On duets, both vocals feed Sunset Chamber and the slap drops out. Large Wooden sits under the guitar and Piano Hall under the piano group at low sends. The Epic Throw is a button, not a bed.

Save location (Mac): ~/Library/Application Support/LiquidSonics/Seventh Heaven Professional/User Presets/ — copy the saved files to the same folder on the Memo rack. Preset names and factory values from the Live Sound KB reverb-reference-memo.

CLA Epic — Memo settings

The Carole King & James Taylor Story · 09-28 + 09-30 · three instances, each on its own FX return, 100% wet, level set by the sends

Mute every processor you aren't using. Per the Waves guide, if nothing is routed, the input feeds all four delays and all four reverbs, so an unmuted, unrouted module is live. Epic has no ducker; if the vocal returns crowd the words, put a light sidechain compressor on the return, keyed from the vocal. Sync follows the host's tempo, and Epic isn't hosted at Memo yet, so every delay below has Sync OFF and fixed ms.

Instance 1 — DAN SLAP (Slap → Plate)

Send: Dan (ch 6) on his numbers. Pull the send down on the duets, where Sunset Chamber carries both voices. Gives the 1970s tape slap on the JT vocal plus a record-style plate.

Section	Control	Setting
Global	Component	Mono-to-Stereo
Global	Input fader	0 dB (set the send so the input meter peaks around -12)
Global	Wet/Dry	100% wet, LOCK on (it's a return)
Global	Output fader	0 dB
Slap	VSO	15 IPS = 166 ms (loads that speed's EQ curve)
Slap	Sync	OFF
Slap	Feedback	0%
Global	Master Mod (dly/vrb)	0 / 0
Slap	HP / LP	200 Hz / 8 kHz
Slap	Fader	0 dB
Slap	Routing	OUT on (level 0 dB) + A (Plate) on, send -10 dB in the Routing panel
Plate (A)	Pre-delay	30 ms
Plate (A)	Reverb Time	1.2 s
Plate (A)	RT Low	position 1 of 3 (lowest, least LF decay)
Plate (A)	RT High	position 2 of 3 (middle)
Plate (A)	HP / LP	200 Hz / 8 kHz
Plate (A)	Fader	-4 dB
Mute		Tape, Throw, Crowd, Room (B), Hall (C), Space (D)

Instance 2 — VOCAL THROW (Throw → Hall)

Send: ch 6, 7 and 8 all feed it at a moderate level. Nothing comes out until you hold Trigger. Use it on the last line of a chorus ('you've got a friend'), then let go.

Section	Control	Setting
Global	Component	Mono-to-Stereo
Global	Input fader	0 dB (set the send so the input meter peaks around -12)
Global	Wet/Dry	100% wet, LOCK on (it's a return)
Global	Output fader	0 dB
Throw	Tap 1 / Tap 2	375 ms / 500 ms
Throw	Sync	OFF
Throw	Feedback	25% (both taps)

Section	Control	Setting
Throw	Offset	0%
Throw	Trigger	turn ON after loading, then re-save (see note)
Global	Master Delay Mod	10
Throw	HP / LP	250 Hz / 6 kHz
Throw	Fader	0 dB
Throw	Routing	OUT on (level 0 dB) + C (Hall) on, send -12 dB
Hall (C)	Pre-delay	40 ms
Hall (C)	Reverb Time	1.8 s
Hall (C)	RT Low	position 1 of 3 (lowest)
Hall (C)	RT High	position 2 of 3 (middle)
Hall (C)	HP / LP	250 Hz / 6 kHz
Hall (C)	Fader	-6 dB
Mute		Tape, Slap, Crowd, Plate (A), Room (B), Space (D)

Instance 3 — DUO WIDTH (Crowd) · audition at soundcheck

Send: Dan and Phoebe vocals plus a little guitar. Crowd builds a cluster of early reflections that widen and thicken without a tail, which can open up a two-voice show on Memo's PA without adding wash. It isn't in the Rev 1.0 packet; keep it only if it earns its place.

Section	Control	Setting
Global	Component	Stereo
Global	Input fader	0 dB (set the send so the input meter peaks around -12)
Global	Wet/Dry	100% wet, LOCK on (it's a return)
Global	Output fader	0 dB
Crowd	Tight ↔ Wide	About 25% of the way from Tight (short taps; Wide gets smeary in a 1.6 s room)
Crowd	HP / LP	300 Hz / 10 kHz
Crowd	Fader	-6 dB
Crowd	Routing	OUT only (no reverb)
Mute		Tape, Throw, Slap, all four reverbs

Soundcheck order

Bring up Instance 1 on Dan alone and set the slap send until you notice it when you mute it, not before. Fire the Throw on a held phrase and adjust Hall (C) fader to taste. Solo-in-place Instance 3, then A/B it on a duet. If any return reads as mud in the room, raise that processor's HP before touching the send. All times are fixed ms; if Epic later lands on a host with tap tempo, switch the Throw to Sync 1/4 + dotted 1/8 and keep everything else.

Loadable presets: 'CLA Epic Presets' folder in the show folder and on the Desktop (CKJT Dan Slap / Vocal Throw / Duo Width, plus one file with all three), built on the plug-in's own parameter map (ParamXML) and Brian's CLA #1 preset. The Throw's Trigger mode is the one switch that couldn't be confirmed from the file format: after loading, turn Trigger ON and re-save. Source: Waves CLA Epic User Guide v2 (control names, ranges and routing behavior). Values are custom; Waves doesn't publish its factory preset names.