

-
-
-
-
-

Chapter 4

Report Definition



Report Definition Overview

Once you have set up the output formats which will form specific sections of a report, the next step is to pull those formats together in one report definition and to specify which accounts should be used and in which sequence they should be printed.

The following shows you the stages of report definition.

Steps to Make and Options to Take

When defining a report you first have to define the formats to be used in the report:

- Header format definition.
- Detail format definition.
- Total format definition.

You must then specify the accounts, or range of accounts, from which the format field values are to be taken.


There are several options available to you to define the conditions under which a report line is produced. These conditions are:


- By single account.
- By account group.
- By account group for all ledgers.
- By account group by view.
- By account group by X-ledger view.

You can make use of one or more of these options and each option is used to define the contents of a specification line or the sequence of specification lines.

These sections detail how you can create the report by defining formats, and specify the report format accounts and sequence by way of the aforementioned options.

The following charts show the steps to take when defining a report reflecting the two stages mentioned above.

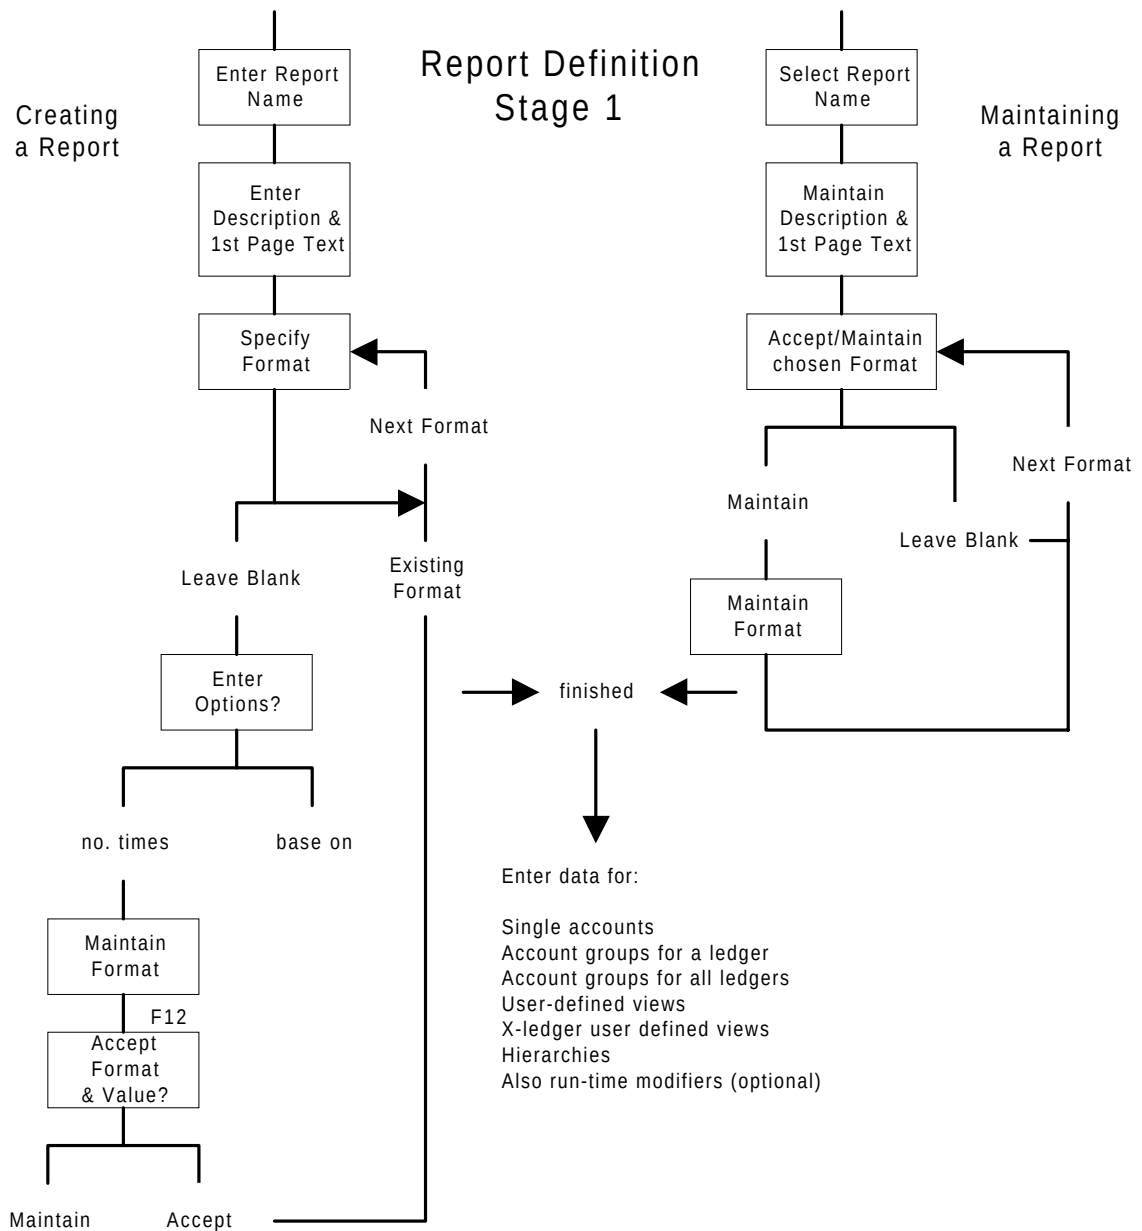

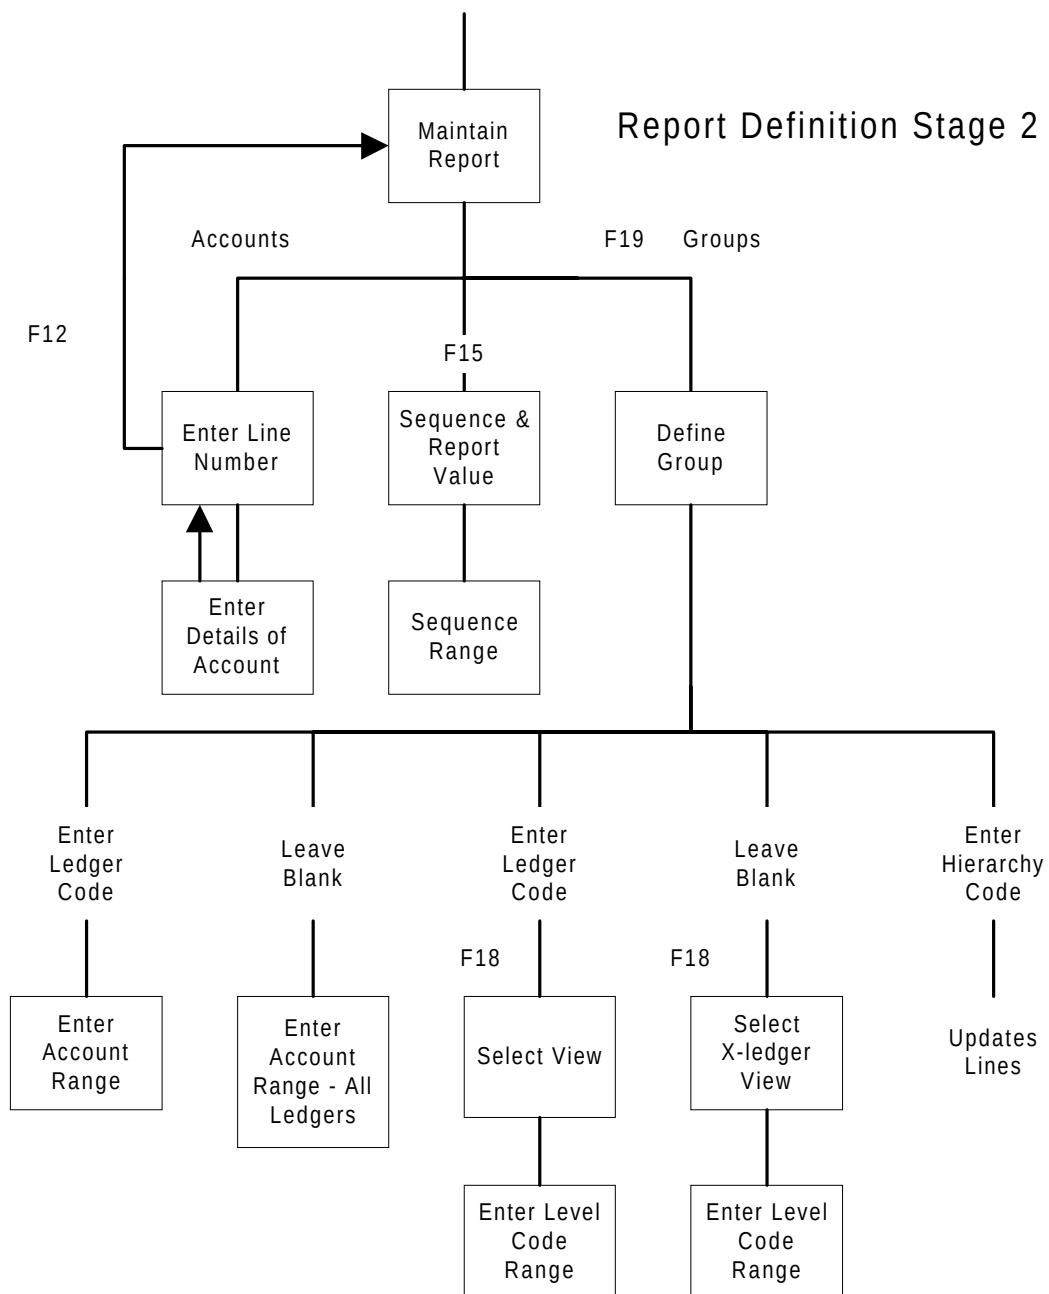

Report Creation and Maintenance

This procedure allows you to define a full report making use of the report formats in Financial Manager and accounts set up in the General Ledger Chart of Accounts.

The procedures for defining a new report and for maintaining an existing report may differ depending on the specifications you want to make, so they are detailed in the Creating a New Report sections.

Creating a New Report



Select the option Report Definition and the next Maintain Report screen is displayed.

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:42:47
Maintain Report			Maint.
1	Report name	Description	Auth.
-	PLREPORT	Profit & Loss Report	Yes
-	PLVIEW	Profit & Loss by View Div/CC/Account	Yes
Enter name of a new report to be added . : DEMO			
1=Select			
F3=Exit			



A list of reports is displayed on the screen. The column to the right of the screen entitled Maint. Auth. indicates which reports you have authority to maintain and which you do not.



Note: You are automatically granted authority to a report once you have created it.



If you want to maintain an existing report enter a 1 against the report line and the system will take you to the next screen.

Alternatively, enter the name of a new report in the field at the base of the screen and press **Enter**.

RW070	Z1 - GB Demonstration Company	USER LOAN	3/02/97 14:52:56
-------	-------------------------------	-----------	---------------------

Create Report

Report name NEG01
Characters per line . : 132 (198 maximum)
Description Report number 198
Rounding method . . . : 1 (1=Round after accumulation/2=Round before)

First page text

_____ +

F3=Return to menu 08-27	F4=Prompt MK	KS	IM	F12=Previous II KENB20A PET16SS2
----------------------------	-----------------	----	----	-------------------------------------

Fields:

Characters Per Line

The default characters per line is 132. 70 - 77 characters allows you to print standard characters on A4 paper. Up to 198 characters can be used with compressed print. The number of characters should be consistent with the format you will be using in the report.

Description

Enter a description for the report of up to 50 characters in length. This is not printed on the report, but could well be the same as the report title.

Rounding Method

Select a default rounding method for your reports.



The rounding method chosen is especially important when very large numbers are being used.

1 - Values selected for the report will be accumulated and rounded only as totals and sub totals are calculated.

2 - Each value which is selected for the report is rounded before being totalled / sub-totalled.

First Page Text

You may enter up to 60 lines of free-format text. This will be printed on the front page of the report. It may be used, for example, to explain the use and content of the report, or to contain a distribution list.



Key in the required details and press **Enter** to proceed to the next screen.

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:47:26
-------	----------------------------	----------	---------------------

Create a Report

Report name DEMO
Description Demonstration Report

Specify Heading Format

Heading format . . . ? _____ (Leave blank for a system-generated name)

F4=Prompt F12=Previous F13=Cancel changes

Fields:

Heading Format

Enter one of the following three heading format names:

Existing format name - the report will include the attributes defined for an existing format.

New format name - you must define a new format to the system and it will be included in the report definition.

Leave blank - you must define a new format to the system and it will be included in the report definition and given a system-generated name.



If you enter an existing heading format, it will be automatically accepted and the screen redisplayed with an entry field for the Detail Format.

If you leave the field blank, the next screen is displayed.

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:48:12
Create a Report			
Report name DEMO			
Description Demonstration Report			
Specify Heading Format			
You wish to create a new heading format.			
Enter a base-on format (the company default is shown) . ? _____			
OR enter the number of lines in the new format : <u>5</u>			
and its currency type . . . : 0 (0=Base, 1=Transaction)			
and its currency ? <u>GBP</u> (Leave blank for all currencies of selected type)			
F4=Prompt F12=Previous F13=Cancel changes			

Enter one of the following:

The new header format you are currently defining may be based upon an existing one by entering the 'based on' format name.

Fields:

Base-On Format

Enter the format on which the new format is to be based.

The company default is suggested.

Currency Type

Enter a 0 if you want the posted transaction values to be printed in the base currency of this company.

Enter a 1 and the transaction values will be printed in the currencies in which they were posted.

Currency

If you have fields in the format which hold transaction currency values (for example, system-defined data dictionary fields beginning with the characters 'PE' or 'PR'), and you choose not to print values for those fields in the transaction currency in which they were posted, enter a currency here and it will be taken as the default currency for those transaction fields in the format.



Note that this is only a default field. You can override the currency specification here by entering a different currency against those fields holding transaction currency values.



If you enter a Base-on Format the system will access an existing format and include it in the report definition. It will also be allocated a system-generated name; the system will take the *report name* you specified earlier on and add the suffix H (for Heading) to the end of the name.

Thus report 'BUDGET' will be allocated a system-generated heading format called 'BUDGET'.

If you leave the Base-on Format field blank and specify (or accept) a number of lines for the new format, you are taken to the next screen where you must define format fields.

Create Format DEMOH Selection Screen

Create Format... DEMOH
.....10.....20.....30.....40.....50.....60.....70.....

.....

.....

.....

.....

F3=Return to format entry F5=Change window pos F12=Previous
F14=Display fmt details F17=Select dict fields F23=Cancel changes

Define the report format .



Once you have finished, press **F12=Previous**
and the confirmation screen is displayed.

Create Format Confirmation Screen

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:47:26
Create a Report			
Report name		DEMO	
Description		Demonstration Report	
Specify Heading Format			
Heading format . . . ?		DEMOH	
maintain this format :		0 (0=No, 1=Yes)	
F4=Prompt F12=Previous F13=Cancel changes			

The system has generated a name for the report format by taking the name of the report you entered in the initial screen and adding the suffix H for 'Heading'. A D and a T would be added for 'Detail' and 'Total' formats.

You have a choice before moving on to the next format definition:

- You can enter a different Heading format for the report
- You can maintain the format you have just created by entering a 1 in the Maintain This Format field and you are returned to the previous screen



If you are happy with the new format, press **Enter** and your specifications for the Heading format are accepted and the next screen is displayed for you to specify the Detail format.

Create a Report Detail Screen

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:47:38
Create A Report			
Report name		DEMO	
Description		Demonstration Report	
Specify Detail Format			
Detail format ?		<u>DEMCD</u> (Leave blank for a system-generated name)	
F4=Prompt F12=Previous F13=Cancel changes			

The system now requires you to define the format for the Detail section of the report. The definition process and options are the same as for the Heading format, and once you are happy with the Detail format you are asked to define the Total format.

When all the required formats have been defined to the report, you are taken to the next stage of the report definition process, which is the specification of accounts, groups or views from which values will be generated for the report.



Note: It is not obligatory to define a Total format.

Maintaining an Existing Report



Select the option Report Definition and the next screen is displayed.

RW070		E1 - Demonstration Company		USER ED3	6/01/94 11:42:47
Maintain Report					
1	Report name	Description			Maint. Auth.
—	PLREPORT	Profit & Loss Report			Yes
—	PLVIEW	Profit & Loss by View Div/CC/Account			Yes
T	DEMO	Demonstration Report			Yes
Enter name of a new report to be added . : _____					
1=Select F3=Exit					

A list of reports is displayed on the screen. The column to the right of the screen entitled Maint. Auth. indicates which reports you have authority to maintain and which you do not.



Note: You are automatically granted authority to a report once you have created it.



If you want to create a new report, enter the name of a new report in the field at the base of the screen and press **Enter**.

Alternatively, enter a 1 against the report line in order to maintain an existing report and the system will take you to the text screen.

Maintain Report Text Screen

```
RM070                                E1 - Demonstration Company        USER ED3                6/01/94
                                                                11:46:29
```

Maintain Report

Report name DEMO
Characters per line . : 132 (198 maximum)
Description Demonstration Report

First page text

Distribution List

+

F3=Return to menu F4=Prompt F12=Previous

The number of characters per line, description and first page text, which have already been defined the report are displayed on the screen. You can change any of these.



Either make changes or leave the details as they are and press **Enter**. to go to the Maintain Report - Heading Format Screen

Maintain Report Heading Format Screen

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:47:26
Maintain Report			
Report name DEMO			
Description Demonstration Report			
Specify Heading Format			
Heading format . . . ? DEMOH			
Maintain this format? : 0 (0=No, 1=Yes)			
F4=Prompt F12=Previous F13=Cancel changes			

The name of the heading format already defined to this report is displayed on the screen. You have the choice to:

- Reject this format and enter the name of another
- Accept the format and enter a 1 in the maintenance field to view it and make changes to it
- Accept the format without maintaining it by pressing **Enter**



Note: You may have authority to maintain the report but still be denied the opportunity to alter a format because the format is defined to other reports as well. Any changes you might want to make to the format would affect these reports too, and the system will not allow this. An error message is generated at the base of the screen should you attempt such a change; you can view a more detailed explanation by pressing the Help key.

If you decide to maintain the format, the system displays the Maintain Format - Maintenance Screen.

Maintain Format Maintenance Screen

```

Maintain Format .. DEMOH          Demonstration Report
.....10.....20.....30.....40.....50.....60.....70.....
Date ***** ** ***** Page ****
Period ****

Account No          Current      Previous      Variance
                   Month         Month

F3=Return to format entry   F5=Change window pos       F12=Previous
F14=Display fmt details    F17=Select dict fields     F23=Cancel changes

```

Maintain Report Accept Detail Format Screen

RW070	E1 - Demonstration Company	USER ED3	6/01/94 11:47:26
-------	----------------------------	----------	---------------------

Maintain Report

Report name DEMO
Description Demonstration Report

Specify Heading Format

Heading format . . . ? DEMOD
Maintain this format? : 0 (0=No, 1=Yes)

F4=Prompt F12=Previous F13=Cancel changes

The system now requires you to accept or maintain the format for the Detail section of the report. The definition process and options are the same as for the Heading format, and once you are happy with the Detail format you are asked to define the Total format.



When all three formats have been defined to the report, press **Enter** to accept the total format and you are taken to the next stage of the report definition process, which is the specification of accounts, groups or views from which values will be generated for the report.

Single Account Specification

This stage of the report definition process allows you to specify single accounts to be accessed for the report. The accounts must exist on the General Ledger Chart of Accounts and may include control accounts and hierarchy accounts.

Specifying a Single Account

Before reaching this stage in the definition of your report, you will have already performed the following tasks:

1. Selected an existing report or entered the name of a new report.
2. Entered or maintained the length, description and first page text of the report.
3. Entered or maintained the required report format types.



When you press **Enter** to accept the final format type, you are taken to the Maintain Report DEMO screen.

Maintain Report Define Screen

The screen is displayed if the report is being defined for the first time.

RW080		E1 - Demonstration Company		USER ED3	6/01/94 11:49:00
Maintain Report DEMO					
Seq. Account		Description		Format name	
(No accounts for this report)					
Seq.no. : 00010		Format name : ? DEMO		ADD	
Account : ? 618000		Print line if all columns are zero? : 1 (0/1)			
Line text :		Rate code . . . ?			
Currency ?					
F4=Prompt F12=Previous F19=Include group at this line					

Fields:

Seq. No.

For the first line to be entered, this is the line number selected from the previous screen. Subsequently, if lines are being added, new lines are added until the line number to be added already exists.

If the line already exists, the next line displayed will be the next line in the specification. If the existing line number is changed, the line will be copied into the new position. (It remains in the existing position as well).

Format Name

Enter the name of the format to be printed at this position of the report. For a new line, the default detail format is displayed. It can be changed to another format.

Account

Enter the General Ledger account code whose values are to be printed on the report. Leave the field blank if this is a total format or if a group of accounts is to be totalled on this line.

Print Line If Columns Are Zero?

If ALL the columns to be printed have a zero value enter either:

1 - if zero values are to be printed.

0 - to print a zero values as blank spaces.

Line Text

Enter the text you want to be printed on this format. It is used for Total formats or if the account description held on the Chart of Accounts is inappropriate. Enter up to the appropriate number of characters as defined in the "Line Text" data dictionary field of the selected format (these may be set to 10,20,30,40, 50 or 60).

Currency

Enter the currency in which the base values of the account are to be printed, if currency translation is required.

PR - items are translated.

PE - items are not translated.

Rate Code

Enter the appropriate rate code for currency translation.

Functions:

F19

Switches the maintenance method to GROUPS allowing you to maintain group details. Pressing **F19** again toggles back to ACCOUNTS.



Enter the required information and press **Enter** to update the line.

The updated line is displayed within the format list at the top of the screen. The next sequence number - 10 along - is set up in the Seq. no. field and the details of the update you have just made entered as a default on the remaining fields. You can change all the default entries appearing in these fields, and continue to enter lines for single or group accounts.



Note: The same format can be used over and over again in a report, e.g. the Detail format used with different accounts.



When you have completed the report specifications, press **F12** to return to the previous screen and then **F8** to view the final acceptance parameters.

Account Group Specification

This stage of the report definition process allows you to specify groups of accounts to be accessed for the report. The accounts must exist on the General Ledger Chart of Accounts and may include control accounts and hierarchy accounts.

This method of account code input is faster than entering a string of single account codes one at a time. These account numbers will print on separate lines of the report.

Before reaching this stage in the definition of your report, you will have already performed the following tasks:

- When you press **Enter** to accept the final format type you are taken to the next screen.

The screen applies to a report you are creating.

If the report is being maintained, any existing accounts and/or account groups defined to the report are displayed on the screen. These can be accessed and maintained by entering the following fields:

Enter Sequence Number

Enter an existing line number of the line type you have selected, i.e. Group or Account, or enter a new number to create a new line.

Enter the number of an existing line and press Enter. The list of format lines will be reset starting from the line you enter.

FM352P - Issue 1 4-25

Functions:

F8

Updates the report.

F13

Allows you to cancel maintenance of the report. Press F13 twice to effect this cancellation.

F15

Allows you to copy a range of specification lines from another report and include them in a specified position in this report.

F17

Allows you to resequence the line numbers in steps of 10.

F19

Switches the maintenance method to GROUPS allowing you to maintain group details. Pressing F19 again toggles back to ACCOUNTS.

Ensure the maintenance method is GROUPS by pressing **F19**, then enter a new line number and press **Enter**.

Maintain Report DEMO - Define Group Screen

RW080	E1 - Demonstration Company	USER ED3	6/01/94 12:02:08
-------	----------------------------	----------	---------------------

Maintain Report DEMO **ADD**

Define group

Position this group at sequence number : 00020
 Format to be used to print account details ? DEMO

Print details if all columns are zero? : 1 (0=No, 1=Yes)
 Line text _____

Currency ? ____ (If left blank, currency & rate code entered at
 Rate code ? ____ run time will be used.)

Now specify the accounts to be included in the group by selecting:-
 EITHER all accounts from hierarchy account code . . ? _____
 OR a set of accounts from ledger ? P/L
 (To select accounts from the entire General Ledger, leave both hierarchy &
 ledger blank.)

F4=Prompt F12=Previous F18=Change view F19=Include account at this line

Fields:

Position This Group

This is the line number of the report, as entered on the previous screen. It may be changed, which will therefore position the lines in a different place on the report.

Format To Be Used

The default format name for the format defined for the report is displayed, but you can enter the name of a different format.

Print Details If All Columns Zero?

If ALL the columns to be printed have a zero value:

Leave 1 to print zero values.

Enter a 0 to print zeros as blank spaces.

Line Text

Enter the text to be printed on this line, in the 'Line Text' position in the format. It is used if the account description is inappropriate.

Currency

Enter the currency in which the values of the account are to be translated.

PR - items are translated.

PE - items are not translated.

Rate Code

Enter the appropriate rate code for the translation.

Hierarchy Account

This field is used to list accounts within a hierarchy. Enter the account code of the hierarchy from which you wish to list all the child accounts. The format used will be the one specified above.

Set Of Accounts

This field is used to select accounts from one ledger or all ledgers. To select accounts from one ledger, enter the ledger code. To select accounts from all ledgers, leave this field blank.



Note: Leaving the above two fields blank allows you to select a range of accounts from anywhere within the General Ledger.



Press **Enter** to confirm your selection. If you specified a hierarchy account code the line will be updated.

Functions:

F18

Allows you to select a user-defined view for the report.

If you entered a ledger code the next screen is displayed.

Maintain Report DEMO - Ledger Description Screen

RW080		E1 - Demonstration Company		USER ED3	6/01/94 12:02:44	
Maintain Report DEMO						
Define group				ADD		
The group will be positioned in the report at sequence number 20						
The format which will be used when printing account detail lines is DEMOD						
and the set of accounts will be selected from ledger P/L						
The description of this ledger is PROFIT & LOSS LEDGER						
Include memo or fiscal accounts? . . : E (F=Fiscal, M=Memo, B=Both)						
Level	Description	From ?	To ?	Sort pty(1-5)	Sub-total format ?	New page after sub-total
1	Account Type			1		0
A	ACCOUNTS SEQ.NO			2		0
F4=Prompt F12=Previous						

The screen shows a description of the selected ledger and its account structure. Account level and report level codes are displayed.

Fields:

Include Memo Or Fiscal

Enter the type of account to be included in the list from the following types:

F - Include fiscal accounts only.

M - Include memorandum accounts only.

B - Both: include all account types.



You can specify the following selection criteria for each account and report level within the ledger:

Level Code From

Enter the account or report level code from which you want values to be taken for the report. Leave this field and the 'To' field blank to select all level codes.

Level Code To

Enter the account or report level code to which you want values to be taken for the report. Leave this field and the corresponding 'From' field blank to select all level codes.



Note: It is advisable to make the ranges as wide as possible to allow additional account codes to be included in the report without the need for

additional maintenance.

Fields:

Sort Pty.

The sort sequence defaults to the sequence of the level codes. It may be changed. The highest level is 1, down to the lowest level 5.

Sub-Total Format

Optionally, enter the name of a format to be printed on change of this account level. This may be used, for example, to print sub-totals on change of a cost centre.

New Page After Sub-Total?

1 - The report is to skip to a new page when an account level sub-total has been printed for this level.

0 - Continue printing on the same page.



Once you have entered the required details, press **Enter** and the line is added to the report definition. You are returned to the previous Define Group (ledger selection) screen where you can make further additions on successive sequence numbers.

Continue to enter further groups or, alternatively, you can select views, or switch to the ACCOUNT input method to enter single accounts.



When you have completed the report specifications, press **F12=Previous** to return to the Maintain Report screen and then **F8=Update** to view the final acceptance parameters.

Account Group for All Ledgers Specification

This stage of the report definition process allows you to specify groups of accounts to be accessed for the report. In this procedure you select accounts across all ledgers. The accounts must exist on the General Ledger Chart of Accounts and will be either control accounts or hierarchy accounts.

This method of account code input is faster than entering a string of single account codes one at a time. These account numbers will print on separate lines of the report.

Specifying an Account Group for All Ledgers

The procedure for specifying an account group range for all accounts is identical to the path explained in the previous section, with the exception that the final parameter range screen is different.

From the Define Group screen ensure that the two fields to specify accounts from a hierarchy code and accounts from a ledger are left blank, and press **Enter**. The next Maintain Report screen is displayed.

RW080		E1 - Demonstration Company		USER ED3	6/01/94 12:03:21	
Maintain Report DEMO						
Define group ADD						
The group will be positioned in the report at sequence number 20						
The format which will be used when printing account detail lines is DEMOD						
and the set of accounts will be selected from ledger						
The description of this ledger is All accounts in General Ledger						
Include memo or fiscal accounts? . . : F (F=Fiscal, M=Memo, B=Both)						
Level	Description	From	To	Sort pty(1-5)	Sub-total format ?	New page after sub-total
1				1		0
2				2		0
3				3		0
4				4		0
A				1		0
B				-		0
C				-		0
D				-		0
E				-		0
F4=Prompt F12=Previous						

The screen displays all account level and report level codes for ledgers within the General Ledger.

Fields:

Include Memo Or Fiscal

Enter the type of account to be included in the list from the following types:

F - Include fiscal accounts only.

M - Include memorandum accounts only.

B - Both: include all account types.



You can specify the following selection criteria for each account and report level across the ledgers:

Level Code From

Enter the account or report level code from which you want values to be taken for the report. Leave this field and the 'To' field blank to select all level codes.

Level Code To

Enter the account or report level code to which you want values to be taken for the report. Leave this field and the corresponding 'From' field blank to select all level codes.



Note: It is advisable to make the ranges as wide as possible to allow additional account codes to be included in the report without the need for additional maintenance.

Fields:

Sort Pty.

The sort sequence defaults to the sequence of the level codes. It may be changed. The highest level is 1, down to the lowest level 5.

Sub-Total Format

Optionally, enter the name of a format to be printed on change of this account level. This may be used, for example, to print sub-totals on change of a cost centre.

New Page After Sub-Total?

1 - The report is to skip to a new page when an account level sub-total has been printed for this level.

0 - Continue printing on the same page.



Once you have entered the required details, press **Enter** and the line is added to the report definition. You are returned to the previous Define Group (ledger selection) screen where you can make further additions on successive sequence numbers.

Continue to enter further groups or, alternatively, you can select views, or switch to the ACCOUNT input method to enter single accounts.



When you have completed the report specifications, press **F12** to return to the Maintain Report screen and then **F8** to view the final acceptance parameters.

Account Group by View Specification

This procedure allows you to produce reports with values/ quantities selected by a specified combination and sequence of ledger level codes. To do this you can use the user-defined views set up in the General Ledger Chart of Accounts.

Specifying an Account Group by View

Before reaching this stage in the definition of your report, you will have already performed the following tasks:

1. Selected an existing report or entered the name of a new report.
2. Entered or maintained the length, description and first page text of the report.
3. Entered or maintained the required report format types.
4. Pressed **F19** to maintain GROUPS and proceed to the Define Groups screen.



In the set of accounts from ledger field, enter the code of a ledger and press **F18** to select a view and the window is displayed.

Pos For	Key	Key description
Pri	1---	Standard key description
Lin	1--- 32--	Account/Cost Centre/Division
	--- 1 --	Division
Cur	--- 12--	Division/Cost Centre
Rat	1 3--- 12--	Division/Cost Centre/Account
	--- 1 --	Cost Centre
Now	--- 21--	Cost Centre/Division

The window allows you to select one of the user-defined views which has been set up for the level codes within this ledger.

- The level codes of each view are displayed as numbers within the Key column
- The sequence of the levels is displayed, starting from 1 and descending to a possible 9 if there are 9 available levels in a ledger
- A - in the Key column indicates that the level has not been set up within the ledger's structure
- A blank space in the Key column indicates that there is a level in the ledger's structure but it has not been selected for the view



Note: If no views exist for the ledger the system will take you into the screen where level code range input is defined.



Select a view by entering a 1 against the appropriate view. The system automatically calls up the next report definition screen.

RW080		E1 - Demonstration Company		USER ED3		6/01/94 12:04:26	
Maintain Report DEMO							
Define group							
Sequence number . . .		20		Format for detail lines . . .		DEM00	
View . . . P/L 3---		12--		Division/Cost Centre/Account			
				ADD			
Lvl	Description	From ?	To ?	Sort pty(1-5)	Sub-total format ?	New page after tot	
6	Division	_____	_____	1	_____	0	
7	Cost Centre	_____	_____	2	_____	0	
1	Account Type	_____	_____	3	_____	0	
A ACCOUNTS SEQ.NO		_____	_____	4	_____	0	
F4=Prompt F12=Previous							

The following details are displayed on the screen:

- Sequence number - the report sequence number you entered earlier on in the report definition procedure
- View - the ledger code of the ledger to which the view belongs, the allocated levels of that view and the name given to that view
- Lvl - a column of levels within the view, which corresponds to the levels listed above

You can specify the following selection criteria for each account and report level across the ledger:

Fields:

Level Code From

Enter the account level code from which you want values to be taken for the report. Leave this field and the corresponding 'To' field blank to select all level codes.

Level Code To

Enter the account level code up to which you want values to be taken for the report. Leave this field and the 'From' field blank to select all level codes.



Note: It is advisable to make the ranges as wide as possible to allow additional account codes to be included in the report without the need for additional maintenance.

Sort Pty.

The sort sequence defaults to the sequence of the level codes. It may be changed. The highest level is 1, down to the lowest level 5.



Note: The sort priority will probably be determined by the level sequence of the view you have selected. However, the option is still available should you want to alter the order at

this stage.

Sub-Total Format

Optionally, enter the name of a format to be printed on change of this account level. This may be used, for example, to print sub-totals on change of a cost centre.

New Page After Tot

1 - The report is to skip to a new page when an account level sub-total has been printed for this level.

0 - Continue printing on the same page.



Once you have entered the required details, press **Enter** and the line is added to the report definition. You are returned to the previous Define Group (ledger selection) screen where you can make further additions on successive sequence numbers.



Note: You are only provided with report levels to sequence the view if the view contains all of the account levels 1 to 4 which have been allocated to the ledger in question.

Continue to enter further groups by view or, alternatively, you can enter normal group ranges, or switch to the ACCOUNT input method to enter single accounts.



When you have completed the report specifications, press **F12** to return to the Maintain Report screen and then **F8** to view the final acceptance parameters.

Account Group by X-ledger View Specification

This procedure allows you to produce reports across all ledgers with values/quantities selected by a specified combination and sequence of X-ledger level codes. To do this you can use the X-ledger user-defined views set up in the General Ledger Chart of Accounts.

Specifying an Account Group by X-ledger View

Before reaching this stage in the definition of your report, you will have already performed the following tasks:

1. Selected an existing report or entered the name of a new report.
2. Entered or maintained the length, description and first page text of the report.
3. Entered or maintained the required report format types.
4. Pressed **F19** to maintain **GROUPS** and proceed to the Define Groups screen.



Ensure that the hierarchy account code and the accounts from ledger selection fields are left blank and press **F18** to select a X-ledger view and the next window is displayed.

Select Cross-Ledger User-Defined Key Window

RW080 E1 - Demonstration Company USER ED3 6/01/94
12:08:21

Maintain Report DEMO

Def Select Cross-ledger User-defined key. ADD Def Select C

Pos	Key	Key description	More
For	123456789	Standard key description	
Pri	-----		
Lin	I -----	Margin by Product Group	

Cur at
Rat

Now
EIT
OR
(To
led

F12=Previous

The window displays the X-ledger views which have been set up on the General Ledger Chart of Accounts. Each X-ledger view is comprised of X-ledger levels. As such, the views cannot belong to a particular ledger and do not have specific level code numbers 1 to 9 against them because the codes might be used at different levels across different ledgers.



Select a X-ledger view by entering a 1 against the one you want to use. The system automatically displays the next screen where you can specify level ranges.

Maintain Report DEMO Select Level Ranges Screen

RW080		E1 - Demonstration Company		USER ED3		6/01/94 12:18:33	
Maintain Report DEMO							
Define group							
Sequence number . . .		20		Format for detail lines . . .		DEMO	
View . . .		-----		Margin by Product Group			
						ADD	
Lvl	Description	From	To	Sort pty(1-5)	Sub-total format ?	New page after tot	
	Product Group	_____	_____	1	_____	0	
	Account Code	_____	_____	2	_____	0	
A		_____	_____	3	_____	0	
B		_____	_____	4	_____	0	
C		_____	_____	5	_____	0	
D		_____	_____		_____	0	
E		_____	_____		_____	0	
F4=Prompt F12=Previous							

The screen details include:

- Sequence number - the report sequence number you entered earlier on in the report definition procedure
- View - there is no defined ledger code for the view because it is X-ledger. Level numbers are left as - because they are not linked to a single ledger's structure. However, the name given to the X-ledger view is displayed
- Lvl - the column of levels within the view is blank because they are not linked to a single ledger's structure

You can specify the following selection criteria for each account and report level across the ledgers:

Fields:

Level Code From

Enter the account level code from which you want values to be taken for the report. Leave this field and the corresponding 'To' field blank to select all level codes.

Level Code To

Enter the account level code up to which you want values to be taken for the report. Leave this field and the 'From' field blank to select all level codes.



Note: It is advisable to make the ranges as wide as possible to allow additional account codes to be included in the report without the need for additional maintenance.

Sort Pty.

The sort sequence defaults to the sequence of the level codes. It may be changed. The highest level is 1, down to the lowest level 5.



Note: The sort priority will probably be determined by the level sequence of the view you have selected. However, the option is still available should you want to alter the order at this stage.

Sub-Total Format

Optionally, enter the name of a format to be printed on change of this account level. This may be used, for example, to print sub-totals on change of a cost centre.

New Page After Tot

1 - The report is to skip to a new page when an account level sub-total has been printed for this level.

0 - Continue printing on the same page.



Once you have entered the required details, press **Enter** and the line is added to the report definition. You are returned to the previous Define Group (ledger selection) screen where you can make further additions on successive sequence numbers.

Continue to enter further groups by view or, alternatively, you can enter normal group ranges, or switch to the ACCOUNT input method to enter single accounts.



When you have completed the report specifications, press **F12** to return to the Maintain Report screen and then **F8** to view the final acceptance parameters.

Inclusion of Sequence Lines from another Report

The use of the function key **F15** allows you to copy a report sequence line or range of lines from another report and to include them in a specified position in the report you are defining.

Before reaching this stage in the definition of your report, you will have already performed the following tasks:

1. Selected an existing report or entered the name of a new report.
2. Entered or maintained the length, description and first page text of the report.
3. Entered or maintained the required report format types.

When you press **Enter** to accept the final format type you are taken to the next Maintain Report screen.

RW080	E1 - Demonstration Company	USER ED3	6/01/94 12:20:02
Maintain Report DEMO			
Seq. Account	Description	Format name	
10 618000	Sundry	DEMO	
Enter sequence number to maintain . . . : _____			ACCOUNTS
OR position display at sequence number : _____			
F8=Update report	F13=Cancel maintenance of report	F17=Resequencing	
F19=Include groups	F15=Include from another report		

If the report is being maintained, any existing accounts and/or account groups defined to the report are displayed on the screen. These can be accessed and maintained by entering the following fields:

Fields:

Enter Sequence Number

The report is created by adding various output formats by line sequence number. By default the numbers are always in 10s to make inserting lines easier. The first line defaults to '00010'.

Enter an existing line number of the line type you have selected, i.e. Group or Account, or enter a new number to create a new line.

Position Display At Sequence Number

Enter the number of an existing line and press **Enter**. The list of format lines will be reset starting from the line you enter.

Functions:

F8

Updates the report.

F13

Allows you to cancel then maintenance of the report. Press **F13** twice to effect this cancellation.

F15

Allows you to copy a range of specification lines from another report and include them in a specified position in this report.

F17

Allows you to resequence the line numbers in steps of 10.

F19

Switches the maintenance method to GROUPS allowing you to maintain group details. Pressing F19 again toggles back to ACCOUNTS.



Without keying in any details on the screen, press **F15** and the next Maintain Report screen is displayed.

Maintain Report DEMO Include Sequence Lines Screen 3

RW150		E1 - Demonstration Company		USER ED3	6/01/94 12:21:54
Include From Report PLREPORT					
Seq.	Format	name	Account	Account description	
10	PLREPH				
20	PLREPD	A/C Group		Based on Ledger Code P/L	
30	PLREPT	No account		Company Total	
Enter copy-from sequence . . . : <u>20</u> and copy-to . . : <u>30</u>					
OR Position display at sequence : <u> </u>					
F12=Previous					

Fields:

Enter Copy-From Sequence

Lines will be copied from this list starting with the sequence number specified here.

Copy-To Sequence

Lines will be copied from this list ending at the sequence number specified here.

Position Display At Sequence

Enter the line number and the list displayed will reposition itself to start from that number.



Enter a range of sequence numbers and press **Enter**. You are returned to the initial screen in this procedure.

Maintain Report DEMO Include Sequence Lines Final Screen

RW080	E1 - Demonstration Company	USER ED3	6/01/94 12:22:51
Maintain Report DEMO			
Seq. Account	Description	Format name	
10 618000	Sundry,	DEM00	
20 A/C Group	Based on Ledger Code P/L	PLREFD	
30 No account	Company Total	PLREPT	
Enter sequence number to maintain . . . : _____			ACCOUNTS
OR position display at sequence number : _____			
F8=Update report		F13=Cancel maintenance of report	F17=Resequence
F19=Include groups		F15=Include from another report	

The range of sequence lines you specified in the previous screen are now entered beginning at the sequence number you allocated for this report.

Report Definition Confirmation

This section simply demonstrates how you should complete and update a report once you have carried out all the necessary definition procedures.



Once you have completed the sequence of definition lines for your report and do not want to enter or modify the report further, return to the Maintain Report screen by pressing **F12**.

FM080	E1 - Demonstration Company	USER ED3	6/01/94 12:25:45
Maintain Report DEMO			
Seq.	Account	Description	Format name
10	618000	Sundry	DEM00
20	A/C Group	Based on Ledger Code P/L	PLREPD
30	No account	Company Total	PLREPT
Enter sequence number to maintain . . . : ____			GROUPS
OR position display at sequence number : ____			
F8=Update report		F13=Cancel maintenance of report	F17=Resequence
F19=Include Accounts		F15=Include from another report	



You can either cancel any entries you have made in the report definition by pressing **F13=Cancel maintenance of report** twice or you can update the report by pressing **F8=Update report**, which will bring up the next screen.

Maintain Report Definition Screen

RW070	E1 - Demonstration Company	USER ED3	6/01/94 12:26:18
Maintain Report			
Report name	DEMO		
Description	Demonstration Report		
Characters per line . .	132 (198 maximum)		
Printer Forms Definition			
Lines per page	66		
Start new page after line	60		
Forms type	*STD		
Compressed printing?	0 (0=No, 1=Yes)		
Landscape printing?	0 (0=No, 1=Yes)		
Number of copies	01		
Other Considerations			
Save the generated source?	0 (0=No, 1=Yes)		
Generate the report now?	1 (0=No, 1=Yes)		
Extract accounts before next run?	1 (0=No, 1=Yes)		
Please press ENTER.			

The top three lines provide the report name, description and width. This data cannot be amended. The remainder of the screen shows the current parameters for the report. For a new report the company default values (if any) are displayed.

Fields:

Lines Per Page

Enter the depth of the page on which the report is to be printed. Standard listing paper is often 66 lines deep, of which 50 - 60 are used for printing.

Start New Page

This is normally the same as 'lines per page'. Enter a different (lower) number to force an earlier page change.

Forms Type

If you intend to print this report on special stationery - or just on better quality listing paper - enter a 'Form Type'. This will prompt the operator to load the special stationery before the report can be printed.

For a standard forms type, enter *STD.

Compressed Printing

Enter 1 if the report is to be printed with 'compressed print'. Obviously, the printer must have this capability.

Landscape Printing

Enter a 0 if you do not want the report to be printed in landscape format. Enter a 1 if you do.

Number Of Copies

If more than one 'top' copy is to be printed, enter the number of copies you need.

Save The Generated Source

The report specification is converted into a computer program.

Enter 1 if you wish to save the source of the program generated.

Generate The Report Now?

Enter 1 create the program which will then enable you to produce the report itself.

Extract Accounts Before Next Run

Enter 1 to run the account extract required for this report now, rather than at the time the report is run.



Note: A record is kept of all the accounts used in the preparation of a report. This means that it can access those accounts directly, instead of searching the entire General Ledger Chart of Accounts each time the report is produced. However, if new General Ledger accounts have been created since the last extract, and if they fall within the report's selection criteria, it will be necessary to perform the extract again in order to include the new accounts in the report.



Note: You can set up defaults for several of these parameters to avoid having to enter them each time you confirm a report.



Once you have filled in all the necessary details, press **Enter** and the report will be generated as a batch job. The system returns you to the initial Maintain Report screen where you can create or maintain further reports.