

-
-
-
-
-

Chapter 2

Customer And Equipment Database



Customer Additional Details Maintenance



1/WOE

You must set up every Workshop Management customer as a customer in Accounts Receivable. Workshop Management uses much of the customer information set up in Accounts Receivable. You use this option to set up the extra information Workshop Management needs.



Tip: You must set up the customer's additional service details before you can record equipment installed at the site.

Additional Details Maintenance Customer Selection Screen



To display this screen, select the Customer Additional Details option.

Use this screen to select the customer you want to define for Workshop Management.

```
SS017          Z1 - GB DEMO. SERVICE COMPANY    USER GBJBATD0  26/11/97
               "BRUM" TRAINING & SERVICE BRANCH  11:48:44
Additional Details Maintenance : Service System

Please Enter Account Number ..?. ABC01█

...the relevant address details will be displayed for acceptance.

F3=Exit  F4=Prompt

5-41  SA  MW  KS  CL  IM  DM  II  STUD140  KB  PKH317S1
```

Fields:

Account Number

Enter the customer account number.



Press **Enter** to display the Additional Details Maintenance Address Screen.

Additional Details Maintenance Address Screen



To display this screen, on the Additional Details Maintenance Customer Selection Screen, select a customer and press **Enter**.

This screen shows the customer's address. You can use this screen to select a different customer, if necessary.

```
SS017          Z1 - GB DEMO. SERVICE COMPANY      USER GBJBATD0  26/11/97
               "BAUM" TRAINING & SERVICE BRANCH    11:52:02
Additional Details Maintenance : Service System

Please Enter Account Number ..?. ABC01

Account Name      ABC Holiday Shop Ltd
Address Line 1    24, Carrington St,
Address Line 2    Hove,
Address Line 3    Sussex
Address Line 4
Address Line 5
P-Code 1st Half  BR74      Post Code 2nd Half  7YB

...press 'ENTER' to accept this account, or key in another choice.

F3=Exit  F4=Prompt

5-36  SA  MW  KS  CL  IM  DM  II  STUD140  KB  PKH317S1
```

Fields:

Please Enter Account Number

To change the customer, enter the new customer account number and press **Enter**.



Press **Enter** to display the Additional Details Maintenance Address Selection Screen.

Additional Details Maintenance Address Selection Screen



To display this screen, press **Enter** on the Additional Details Maintenance Address Screen.

Use this screen to select the customer address you want to maintain.



Tip: To display a list of all existing addresses for the customer, press **Enter**.

```
SS017          Z1 - Demonstration Company      USER GBJBATD0  15/12/97
                  WORKSHOP BRANCH              14:13:15
Additional Details Maintenance : Service System

Please Enter Account Number  003_____

Account Name      La Perfumerie Agnes
Address Line 1    17A Rue de Rivoli
Address Line 2    Lyons 69018
Address Line 3    France
Address Line 4
Address Line 5
P-Code 1st Half      Post Code 2nd Half

...press 'ENTER' to accept this account, or key in another choice.

F3=Exit

5-32  SA  MW  KS  CL  IM  DM  II  EDN400A  KB  PKH318S1
```

Fields:

Enter Location Code

Enter a new location code, or select an existing location from the list.



Note: For any account, there can be a number of locations with different addresses.



Select your customer and address, and press **Enter** to display the Additional Details Maintenance Screen 1.

Additional Details Maintenance Screen 1



To display this screen, on the Additional Details Maintenance Address Selection Screen, select a customer and address, and press **Enter**.

Use this screen to enter the basic details for the selected customer.

SS017	Z1 - Demonstration Company	USER GBJBATD0	3/12/97
	CENTRAL BRANCH		15:22:22
Additional Details Maintenance : Service System			
Account No. AE01 ANDY'S TEST CUSTOMER			
Locn. Code 000 ADDITION - EXISTING A/C			
Account Phone Extension.....: _____			
Invoice Destination Address A/c.: AE01 _____			
and Sequence.....: _____			
Contact.....: _____			
Sundry Account.....: 0 (0=A/C Cust 1=Proforma 2=Invoice Cust)			
Internal Customer.....: 0 (1=yes 0=no)			
Region.....?: _____			
Admin. Branch.....?: 01 CENTRAL BRANCH			
Invoice Consolidation Level.....: 3 (1=Account 2=Location 3=Job/Contract)			
Customer Ref. for Job.....: 0 (1=yes 0=no) Parts Price List..?: _____			
Customer Ref. for Contracts.....: 0 (1=yes 0=no) Parts Discount List.: _____			
Currency Customer (0/1).....: 0 Currency Rate Code.....?: EER0			
Currency Code.....?: GBP Labour Price List.?: _____			
VAT Code.....?: 001			
F3=Exit F4=Prompt F5=Trade details F12=Reselect Account/Code			

Fields:

Account Phone Extension

Enter the telephone extension number of the site contact.



Note: You use the next screen to enter the Service telephone and extension number.

Invoice Destination Address A/c

Enter the account where you send the invoices raised on behalf of this installation address.

And Sequence

Enter the address where you send the invoices raised on behalf of this installation address.

Contact

This is a memo field. Enter the installation address contact's name.



Note: You can also enter a contact for each piece of equipment at the site.

Sundry Account

Enter one of the following:

0 - If the customer is an A/C customer.

- 1 - If you send the customer pro forma invoices.
- 2 - If you need to send the customer an invoice.

Internal Customer

Enter one of the following:

- 0 - If the customer is an external customer.
- 1 - If the customer is an internal customer.

Region

Enter the service region to which the installation site belongs. You must have set up the code in the Codes/Parameter File using parameter type REGN. The standard reports do not use this field.

Admin Branch

Enter an existing branch.

This defaults to the current branch. The admin branch can be different from the branch that owns the equipment. However, when you move equipment, it is this branch that determines where you move the equipment to and its new owning branch.

Invoice Consolidation Level

Enter one of the following:

- 1 - For account level invoice consolidation.
- 2 - For location level invoice consolidation.
- 3 - For job or contract level invoice consolidation. This is the default.

Consolidation at levels 1 and 2 is subject to the special rules in multi-currency and World Trade: there are break-points at change of currency and at change of VAT/GST regimes.



Note: You can only change this field at account level. The system automatically makes any change you make for the main customer site (address code 000) to all account site records.

Customer Ref For Job

Enter one of the following:

- 0 - If you do not require a customer reference when you log a call.
- 1 - If you must enter a customer reference when you log a call.

Parts Price List

This field only displays if you set the SOP Active field to 1 in Company Profile Maintenance.

Enter a parts list that exists in Sales Order Processing. Workshop Management uses this list to price service parts fitted, and logged in the technical report.

Customer Ref For Contracts

Enter one of the following:

0 - If you do not require a customer reference when you set up a contract.

1 - If you must enter a customer reference when you set up a contract.

Parts Discount List

This field only displays if you set the SOP Active field to 1 in Company Profile Maintenance.

Enter a discount list that exists in Sales Order Processing. Workshop Management uses this list to calculate discounts due on parts fitted and logged in the technical report.

Currency Customer

Enter one of the following:

0 - If this customer is not a currency customer within Workshop Management.

1 - If this customer is a currency customer within Workshop Management.



Note: This field can be different from the currency customer flag used by Sales Order Processing.

Currency Rate Code

Enter the currency rate to convert the customer's prime currency into the company's base currency, during contract and job invoicing. This defaults from the Workshop Management company profile. You must have set up the currency rate code in the General Ledger.

Currency Code

If you set the Currency Customer field to 0, this field defaults to the base currency of the Accounts Receivable company and you cannot change it.

If you set the Currency Customer field to 1, this field defaults to the currency on the customer master and you can change it. You must have set up the currency rate code in the General Ledger.

Labour Price List

Enter a Workshop Management labour price list.

VAT Code

Enter a three character code. You must have set up the VAT code in the General Ledger. This defaults to the value in the customer master file.

Functions:

F5

Trade Details (only if you have World Trade attached). Use this screen to enter World Trade information. See World Trade product information for more details.



To display the Additional Details Maintenance Screen 2, press **Enter**.

Additional Details Maintenance Screen 2



To display this screen, press **Enter** on the Additional Details Maintenance Screen 1.

Use this screen to enter further charging details for the selected customer.

SS017	Z1 - Demonstration Company	USER GBJBATDO	15/12/97
	WORKSHOP BRANCH		14:15:40
Additional Details Maintenance : Service System			
Account No. C03	La Parfumerie Agnes		
Locn. Code 000	UPDATE		
Customer Priority.....	3		
Customer Calendar Code.....?	___		
Geographic Code.....	CT1	1PC	___
Service Telephone Number.....	___		
Service Telephone Extension.....	3456		
Service Fax Number.....	0432 264300		
Change Standard Distance Value..	1	(1/0)	___
Standard Mile/Km Value.....	10.00		
Change Actual Distance Driven...	0	(1/0)	___
Change per Mile/Km.....	.00		
Change Zones.....	0	(1/0)	___
Zone Code to Change.....?	___		
Job discount.....	50.00	Warranty Claim.?:	0
Service account.....?	C03	Location code....	222
Warranty Claim Labour Credit List..?	___	Fixed/Hourly.....	0 (0/1)
F3=Exit F4=Prompt F12=Previous			

Fields:

Customer Priority

Enter this customer's priority. This is a number from 0 to 4. The highest priority depends on the setting of the Maximum Customer Importance field on the System Parameters File Maintenance Screen 2.

Workshop Management uses the customer priority in the 3-D matrix (with volume segment and machine up or down) to apply percentage reductions to call response time.

Customer Calendar Code

Enter a customer calendar code. The field is for memo use only.

Geographic Code (Two Fields)

Enter this customer's geographic code.

You use postcodes or other geographic codes (geocodes) to define territories, or patches. You can then allocate the patches to teams and engineers. You can also use the geographic code when allocating work.

Service Telephone Number

Enter the phone number for the contact at the customer site. This can be a different number to the installation address phone number.

Service Telephone Extension

Enter the contact's telephone extension number.

Service Fax Number

Enter the fax number for the contact.

Charge Standard Distance Value

The default is the value from the Company Profile Maintenance Screen 3.

Enter one of the following:

0 - Not to charge any standard distance value.

1 - To charge a standard distance value.



Note: The Charge Actual Distance Driven and Charge Zones fields must be 0.

Standard Mile / Km Value

If the Charge Standard distance Value field is 0, leave this field as .00.

If the Charge Standard Distance Value field is 1, enter the charge made for a return trip to the site. The field holds 11 digits plus two decimal places.

Charge Actual Distance Driven

The default is the value from the Company Profile Maintenance Screen 3.

Enter one of the following:

0 - Not to charge according to the actual distance driven.

1 - To charge for the actual distance driven. Enter the actual distance driven at technical reporting. Workshop Management multiplies this by the Charge Per Mile, or Km, set up in the next field.



Note: The Charge Standard Distance Value and Charge Zones fields must be 0.

Charge per Mile / Km

If the Charge Actual Distance Driven field is 0, leave this field as .00.

If the Charge Actual Distance Driven field is 1, enter the charge per mile or km. The field holds 11 digits plus two decimal places.

Charge Zones

The default is the value from the Company Profile Maintenance Screen 3.

Enter one of the following:

0 - Not to charge for travel according to zone.

1 - To charge for travel according to zone.



Note: The Charge Standard Distance Value and Charge Actual Distance Driven fields must be 0.

Zone Code To Charge

If the Charge Zones field is 0, leave this field blank.

If the Charge Zones field is 1, enter an existing zone code. This holds the flat rate, branch charge for visiting a customer site in the zone. Set up zone codes in the Codes/Parameter File Maintenance option, under parameter type ZONE.

Job Discount

Enter the percentage discount for the job. This defaults to 0.

Warranty Claim

Specify whether the warranty covers the parts, labour, both or neither.

Service Account

Enter the account number to bill if any of the job is chargeable. This defaults to the account number specified on the selection screen.

Location Code

Enter the location to bill if any of the job is chargeable. This defaults to the location number specified on the selection screen.

Warranty Claim Labour Credit List

Enter the labour rate list to use for a warranty claim for this account.

Fixed/Hourly

Enter one of the following:

0 - To charge the job at a fixed rate.

1 - To charge the job at an hourly rate.



To display the Additional Details Maintenance Screen 3, press **Enter**.

Additional Details Maintenance Screen 3



To display this screen, on the Additional Details Maintenance Screen 2, press **Enter**.

Use this screen to define the opening hours of the customer site.

SS017	Z1 - GB DEMO. SERVICE COMPANY	USER GBJBATD0	26/11/97		
	"BRUM" TRAINING & SERVICE BRANCH		12:01:42		
Additional Details Maintenance : Service System					
Account No. ABC01	ABC Holiday Shop Ltd				
Locn. Code 000	ADDITION - EXISTING A/C				
Customer Hours:-					
Day	Mon	From	To	From	To
	Tue	_____	_____	_____	_____
	Wed	_____	_____	_____	_____
	Thur	_____	_____	_____	_____
	Fri	_____	_____	_____	_____
	Sat	_____	_____	_____	_____
	Sun	_____	_____	_____	_____
F3=Exit F8=Update F12=Previous					
9-37 SA MW KS CL IM DM II STUD140 KB PKH317S1					

Fields:

From And To

Enter 24 hour clock times to show when the site is open, or accepts service calls. These times are for memo purposes only.



Select **F8=Update** to update.

Model File Maintenance

2/WOE

Use this option to set up and maintain the details of all your models and peripherals.

Concepts

You can record workshop jobs against a model defined as a machine. However if you define a model as a peripheral, sub-unit or accessory, you can attach it to a machine model, but you cannot record calls for it.

You can enter a number of inventory item codes on each model. The system uses these codes when Sales Order Processing updates Workshop Management after the sale of a machine.

You can use a serial number in conjunction with the model, to give a unique identity to a particular piece of equipment.

You can define any number of peripherals for each model and serial number combination. You can either assign a peripheral a serial number, or enter it as a quantity. You can identify a peripheral with a configuration code. The configuration code displays when you log a call for its parent machine.

Implications

You must set up models, using this option, before you can enter them against sites as installations. You cannot perform any contract or transaction processing until you have established this equipment database.



Note: The Volume Segment ID field for a model determines how many days or copies constitute a repeat call.

You can use a model to:

- Link a model to its correct contract rates and, possibly, its scheduled visit profile using the model group and model sub-group.
- Price the labour element of workshop jobs, using the hourly labour rates held on the price list specified for the model.
- Generate a schedule of planned maintenance visits for contracts covering the model using the scheduled visit profile.



Note: A profile code specified on a contract header supersedes the profile codes associated with the models covered by the contract.

Model Maintenance Selection Screen



Select Model File (Maintenance) to display the Model Maintenance Selection Screen.

Use this screen to enter the model you want to define or maintain.

SS040	61 - 61 - Demonstration Company	USER SSV3	11/12/95
	CENTRAL BRANCH		14:01:31
Model Maintenance			
Model.....?...?.. <u>WA10</u>			
F3=Exit F4=Prompt			
05-25	SA	MA	KS IM II KENB20A PET113S1

Fields:

Model

Enter the model you want to set up or update.

If it is an existing model, Workshop Management displays the details for update.

If it is a new model, you have to enter the details.



Select the model to display the Model Maintenance Screen 1.

Model Maintenance Screen 1



To display the Model Maintenance Screen 1, select the model on the Model Maintenance Selection screen.

Use this screen to enter the basic details for this model.

SS040	Demonstration Company CENTRAL BRANCH	USER BRERETM	28/10/93 13:39:14
Model Maintenance		CHANGE	
Model	WA10		
Description	WATER ANALYSER 10LITRES PER MIN		
Division	10	Environmental Monitoring	
Model Group	100	Analysers	
Model Sub Group	100	Atmospheric	
Machine/Peripheral (0/1) ..	0		
Labour Price List	PL1		
Visit Profile Code			
Points			
Inventory item codes:-			
F3=Exit F4=Prompt F12=Previous			

Fields:

Description

Enter the description of the model.

Division

Enter the division for this model.

Model Group

Enter the model group.

Model Sub-Group

Enter the model sub-group.

Machine/Peripheral

Enter one of the following:

0 - To define the model as a machine. Use this if you want to log service calls against it and maintain its full details in Installation Maintenance. You set up installation details automatically when you sell a machine through Sales Order Processing. To enable this, you must enter Inventory item codes on the model.

1 - To define the model as a peripheral. Use this if you do not log service calls against it and maintain it as a peripheral in Installation Maintenance. You do not include an Inventory item code on a peripheral. You can sell peripherals through

SOP, but you must manually attach the devices to the appropriate machine records. The SOP interface does not create peripheral details.

Labour Price List

Enter an existing labour price list. Workshop Management uses this to calculate the hourly rates for chargeable work performed on the model.

This field is optional for peripherals.

Visit Profile Code

Leave blank, or enter an existing schedule visit profile (SVP).

Workshop Management uses this when generating the visits to each piece of equipment on a contract. It looks for the relevant SVP according to the following hierarchy:

1. Use the SVP on the contract header.
2. If not found, use the model file SVP.
3. If not found, use the model group file SVP.
4. If not found, use the company profile SVP.
5. If not found, do not generate any visits.



Tip: If Workshop Management finds a scheduled visit profile, it generates visits for the equipment line, on the contract, when you select option 8 (Generate Visits) on the Contract Equipment Maintenance Detail screen.

Points

Enter a number, between 0 and 999, to define the service index of the model. Workshop Management uses this during automatic engineer assignment, to select the engineer, if all other work load factors are equal.

Inventory Item Codes

Enter existing Inventory items. You use these codes to automatically set up installation details for a machine sold through Sales Order Processing.

Do not include Inventory item codes on a peripheral. You can sell peripherals through SOP, but you must attach them manually to machines.



Press **Enter** on Model Maintenance Screen 1 to display the Model Maintenance Screen 2.

Model Maintenance Screen 2



To display Model Maintenance Screen 2, press
Enter on Model Maintenance Screen 1.

Use this screen to set up further model details.

W0040		Z1 - GB Demonstration Company		USER 6BJBANB1	22/04/98
		CENTRAL WORKSHOP			15:06:22
Model Maintenance				CHANGE	
Model Number.....		PROJECTOR001	PROJECTOR		
Van kit number to fix.....					
Av. hours per breakdown....		2	Av. hours per PM visit....		2
Workshop preparation.....		0	Engineer required for Installation..		_
Manufacturers ID.....?		CARR	Carrier Engineering		
Warranty Months.....		12	Volume segment ID.....?		10
Automatic call assignment..		1	Configuration code.?		L Lensatic Sight
Statistical family field 1...?		_	Field 2...?		Field 3...?
Number of meters.....		0	Digits meter1..		0 Digits meter2..
Warranty Units.....		0	Copies = 1 fill developer....		
Copies = 1 fill toner.....			Target Mean Repair Time....		
Volume band starting seq...		-	Target Copies Between Visits..		0
Target Mean Repair Time....			Target cost per copy.....		.00
Target Days Between Visits..		0			
F3=Exit F4=Prompt			F12=Previous		

Fields:

Van Kit Number To Fix

This field is for future development.

Av. Hours Per Breakdown

Enter the default job duration for breakdown calls, in hours and minutes between 00:01 and 99:59. This field is mandatory unless the model is a peripheral.

Av. Hours Per PM Visit

Enter the default job duration for planned maintenance jobs, in hours and minutes between 00:01 and 99:59. This field is mandatory unless the model is a peripheral.

Workshop Preparation

This field is for future development. However you must enter one of the following:

0 - If you do not require workshop preparation

1 - If you do require workshop preparation.

Engineer Required For Installation

This field is only relevant for machines, not for peripherals.

Enter one of the following:

0 - If you do not require Workshop Management to automatically assign an engineer for installation.

1 - To specify that Workshop Management automatically creates an installation job for machines sold through Sales Order Processing, when you complete the SOP Transfer to Workshop. You must have set up the default job category for an installation job.

Manufacturers ID

Enter a manufacturer's name, as set up in Inventory Descriptions, major type MFID.

Warranty Months

Enter the number of months the warranty is to cover this model.

Volume Segment ID

Enter the number of days, or copies, used to calculate a repeat call for this model in call logging. The value must be between zero and 99 and must have been set up in Volume Segment Maintenance.

Automatic Call Assignment

Enter one of the following:

0 - To exclude calls for this model from automatic call assignment.

1 - To include calls for this model in automatic call assignment (ACA).

You can also limit ACA operation by settings in the System Parameters option, Job Category Maintenance, and Engineer Master File Maintenance.

Configuration Code

This entry classifies your peripherals. Leave it blank for machines.

You must have set up the code in Codes/Parameter File Maintenance, under parameter type CONF.

The first 5 configuration codes of peripherals attached to any one machine display, at call logging, on the job line detail screen.

Statistical Family Fields 1 To 3

This value is for memo or reporting purposes. You must have set up the entries in Codes / Parameter File Maintenance, under parameter type STA1.

Number Of Meters

Enter the number of meters for the model, in the range 0 to 2.



Note: If you use meter readings in contracts or technical reporting, you must enter 1 or 2.

Digits Meter 1

Enter the total number of digits on the first meter.

Digits Meter 2

Enter the total number of digits on the second meter.



Note: Workshop Management uses these values to check for meter roll over when it reaches its

maximum reading.

Warranty Units

Enter the agreed number of units covered by the warranty. This must be a positive whole number. This is a memo field.

Copies = 1 Fill Toner

Enter the estimated number of copies expected from each fill of toner.

Copies = 1 Fill Developer

Enter the estimated number of copies expected from each fill of developer.

Volume Band Starting Seq

Enter a number in the range 1 to 9.

Target Mean Repair Time

Enter the expected repair time for the model in hours and minutes. This field is for memo purposes only.

Target Copies Between Visits

Enter the number of copies you expect the model to produce between service visits.

Target Days Between Visits

Enter the number of days, in the range 1 to 999, during which you expect the model to work without service intervention.

Target Cost Per Copy

Enter a monetary value, in the range 0.00001 to 9999.99999, which is the target maximum copy cost.



Press **Enter** to display the Model Maintenance Screen 3.

Model Maintenance Screen 3



To display this screen, press **Enter** on the Model Maintenance Screen 2.

Use this screen to enter the price list and charging information for the selected model.

W0040	Z1 - GB Demonstration Company	USER GBJBANB1	22/04/98
	CENTRAL WORKSHOP		15:35:11
Model Maintenance		CHANGE	
Model Number.....	PROJECTOR001	PROJECTOR	
Parts price list.....	?		
Estimate/Quotation required.....	0	(0=No 3=Estimate 4=Quote)	
Serial number mandatory at job creation.....	0	(0/1)	
Accessory list code.....	?		
Certification required.....	0	(0/1)	
% tolerance for estimates on customer stock.....	Value at this level	(0/1) 1	
		30.00	
% tolerance for estimates on own stock.....	Value at this level	(0/1) 0	
		.00	
Estimate creation fee.....	Value at this level	(0/1) 1	
		50.00	
Fixed price charge.....	Value at this level	(0/1) 0	
Warranty months.....	Value at this level	(0/1) 1	
		12	
Warranty Claims.....	Value at this level	(0/1) 1	
Default Labour Credit Model For Claims.....	Value at this level	(0/1) 0	
F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous F14=Warranty Parts			

Fields:

Parts Price List

Select the parts' price list to use for this model.

Estimate/Quotation Required

Enter one of the following:

- 0 - If you do not require either an estimate or quotation.
- 3 - If you require an estimate.
- 4 - If you require a quotation.

Serial Number Mandatory At Job Creation

Enter one of the following:

- 0 - If you do not need to enter a serial number to book a job for this division.
- 1 - If you must specify the equipment's serial number to book a job.

Accessory List Code

Select the accessory list for this model.

Certification Required

This is a memo field. Enter one of the following:

0 - If you do not require certification.

1 - If you do require certification.

% Tolerance For Estimates On Customer Stock

Enter one of the following:

0 - If there is no tolerance on estimates for customer stock.

1 - If there is a tolerance on estimates for customer stock. Enter the percentage value of the tolerance in the field below this flag.

% Tolerance For Estimates On Own Stock

Enter one of the following:

0 - If there is no tolerance on estimates for your own stock.

1 - If there is a tolerance on estimates for your own stock. Enter the percentage value of the tolerance in the field below this flag.

Estimate Creation Fee

Enter one of the following:

0 - If you do not charge a fee when you create an estimate.

1 - If you do charge a fee when you create an estimate. Enter the fee in the field below this flag.



Note: The system applies this fee, whenever you cancel a job for this model, after you have sent an estimate or quotation. You must remove the charge to prevent the system producing an invoice.

Fixed Price Charge

Enter one of the following:

0 - If you do not have a fixed price for this model.

1 - If you do have a fixed price for this model.

Warranty Months

Enter one of the following:

0 - If there are no warranty months for this model.

1 - If there are warranty months for this model. Enter the length of the warranty in months, in the field below this flag.

Warranty Claims

Enter one of the following:

0 - If you do not allow warranty claims against this model.

1 - If you do allow warranty claims against this model.

Default Labour Credit Model For Claims

Enter one of the following:

0 - If this is not the default labour credit model for warranty claims.

1 - If this is the default labour credit model for warranty claims.

Functions:

F14

Warranty Parts. Use this function to display the Warranty Parts Maintenance Window so you can enter a list of the parts included on this model's warranty.



Select **F8=Update** to update the model.

Warranty Parts Maintenance Window

 To display this screen, select **F14=Warranty Parts** on the Model Maintenance Screen 3.

Use this screen to define the list of parts covered by the warranty on this model.

W0040	Z1 - GB Demonstration Company CENTRAL WORKSHOP	USER GBJBANB1	22/04/98 15:35:11
Model Maintenance		CHANGE	
Model Number..... PROJECTOR001		PROJECTOR	
Parts price list..... ?			
Estimate/Quotation required..... 0		(0=No 3=Estimate 4=Quote)	
Serial number mandatory at job creation..... 0		(0/1)	
Warranty Parts Maintenance			
Part Number (?)	Description	Mths	0/1) 1
25022	Purchased Item	2	30.00
		0	0/1) 0
		0	.00
		0	0/1) 1
		0	50.00
		0	0/1) 0
F4=Prompt F8=Update F12=Previous		0/1) 1	12
Warranty Claims.....		Value at this level (0/1) 1	
Default Labour Credit Model For Claims.....		Value at this level (0/1) 0	
F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous F14=Warranty Parts			

Fields:

Part Number

Select the part that this model's warranty covers.

Months

Enter the length of warranty, in months, for this part.

 Select **F8=Update** to save the information and return to Model Maintenance Screen 3.

Installation Details Maintenance



3/WOE

Use this option to specify what equipment a customer holds at their site. You can enter both models and peripherals, and give them all serial numbers.

When you enter a new installation, the account code and address normally already exist in Workshop Management. However, you can enter a new cash customer if necessary. You then define each piece of equipment at the installation by its model number and, ideally, its serial number. If you do not know the serial number, leave it blank and enter a model quantity. You can then enter individual serial numbers later.

Workshop Management does not apply the new serial numbers immediately; it stores the numbers for update when you run the Day End Routine option.



Note: For World Trade and multi-currency, you can apply VAT at machine level.

Implications

The information you set up here:

- Means you can locate any piece of equipment.
- Calculates the warranty expiry date for a piece of equipment by adding warranty months to installation date.
- Allows you to assign a specific engineer to all service jobs for a piece of equipment (overriding the automatic engineer assignment). You must set the Assign Calls Only To Preferred Engineer For Machine field in System Parameters Maintenance Screen 5 and enter an engineer against the installed equipment.

Installation Maintenance Selection Screen



Select the Installation Details Maintenance option to display the Installation Maintenance Selection Screen.

Use this screen to select the model or customer for which you want to enter installation details.

SS020	Z1 - GB Demonstration Company	USER GJBATD0	18/09/97
	"BAUM" TRAINING & SERVICE BRANCH		12:37:35
Installation Maintenance			
Model.....?	WA10		
Serial Number.....	WAN0001		
Account Number.....?	GC01		
Account Address.....	000		
F3=Exit F4=Prompt F9=Serial Maint. F15=Address F16=Machine			
6-24 SA MW KS CL IM DM II EDN400A KB PKH317S1			

Fields:

Model

Enter an existing model.



Note: Do not select a peripheral at this point. You add peripheral details to a machine using a separate function.



Tip: If you have not entered any equipment yet, you must also enter an account number.

Serial Number

Enter an existing serial number.

If you enter a serial number and no model, press **Enter**, and either the model displays, or, if the serial number is not unique, select the correct model from the displayed window.

Account Number

Enter an existing customer. You must have set up this customer in Accounts Receivable and Workshop Management.

Account Address

Enter the address for the specified customer.

Functions:

F9

Serial Number Maintenance. Enter the model and serial number, then use this function to display the Serial Number Maintenance screen.

F15

Address. Enter the account and address, then use this function to display the Installation Name and Address Detail screen.

F16

Machine. Enter a model and account number, then use this function to display the Installation Equipment Maintenance Screen.



- Enter account number and account address and press **Enter** to display the Installation Equipment Maintenance Screen.
- Enter account number and account address and select **F15=Address** to display the Installation Name/Address Detail Screen.
- Enter the model and serial number and press **Enter** to display the Equipment Detail Maintenance Screen.
- Enter the model and serial number and select **F9=Serial Maint** to display the Serial Number Maintenance Screen.

Installation Name and Address Detail Screen



Enter the account and address details on the Installation Maintenance Selection Screen and select **F15=Address** to display this screen.

Use this screen to enter the installation name and address details for the equipment.

W0021	Z1 - GB Demonstration Company CENTRAL WORKSHOP	USER GBJBANB1	22/04/98 15:09:36
Installation Name/Addr. Detail		UPDATE	
Account Number..... GC01	Account Address..... 000		
Main Account Name... Reeves Chemist's			
Account Name..... Reeves Chemist's	Currency customer 1		
Account Address..... 31 Lenton Boulevard	Currency code...? GBP		
Lenton	Curr rate code...? PERD		
Nottingham	VAT code.....? 001		
England			
Post Code..... NG7 - 4FW	Geographic Code.... NG7 - 4FW		
Telephone Number... 0602 230067	Ext No... _____	Inv.Cons Lev... 3	
Admin Branch Code... CT CENTRAL BRANCH	Job Ref..... 0		
Account Contact.... J JONES	Region.... EM	Contract Ref... 0	
Customer Priority... 1			
Statement Code..... GC01	Invoice Address..... GC01	000	
Parts Price List.... 001	Parts Discount List...		
F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous F21=Text			

Fields:

Account Name

Enter the name for the equipment location. This defaults to the selected account.

Currency Customer

Enter one of the following:

0 - If the customer is not multi-currency.

1 - If the customer is multi-currency.

Account Address

Enter the installation, or site, address. This defaults to the selected address.

Currency Code

Enter the customer's currency. This defaults to the value from the customer's additional service details.

Currency Rate Code

Enter the currency rate. This defaults to the value from the customer's additional service details.

VAT Code

Enter the customer VAT code. This defaults to the value from the customer's additional service details.

Geographic Code

Enter the customer's geographic code for this address.

You use this to define territories allocated to teams and engineers.

Telephone Number

Enter the telephone number. The default is from the customer's details.

Ext No.

Enter the contact telephone extension number.



Note: You maintain the Workshop Management telephone number and extension on the Customer Additional Service Details Maintenance Screen 2.

Inv Cons Lev

Enter the invoice consolidation level:

- 1 - Account level.
- 2 - Location level.
- 3 - Job/contract level.

Admin Branch Code

Enter the administration branch. This defaults to the branch from Customer Additional Details Maintenance. The administration branch can be different to that which owns the equipment.

Job Ref

Enter one of the following:

- 0 - If you do not require a customer reference when entering a job.
- 1 - If you require a customer reference when entering a job.

Account Contact

Enter the contact name for this account. This defaults to the installation address contact's name.

There is also an equipment contact field for each piece of equipment on the site.

Region

Enter the service region to which the installation site belongs. The code must exist in parameter type REGN in the Codes/Parameter File.

This defaults from Customer Additional Service Details Maintenance.

You can report on service and contract revenue by service region.

Contract Ref

Enter one of the following:

0 - If you do not require a customer reference when entering a contract.

1 - If you require a customer reference when entering a contract.

Customer Priority

Enter 0 to 4 to define the customer priority. This defaults from Customer Additional Details Maintenance. The system uses customer priority in the 3-D matrix (with volume segment and machine up or down) to apply a percentage reduction to call response time, if applicable.

You specify whether 0 or 4 is the highest priority in the Maximum Customer Importance field on the System Parameters Maintenance Screen 2.

Statement Code

Enter the customer site account or statement code. This defaults from Customer Additional Details Maintenance.

Invoice Address

Enter an existing account and location code. The name and address associated with this account and address is the Invoice To address on invoices. This defaults from Customer Additional Details Maintenance.

Parts Price List

Enter the list to use for pricing the parts. This defaults from Customer Additional Details Maintenance. You must set up the parts price list in Sales Order Processing.

Parts Discount List

Enter the discount list to use for pricing parts. This defaults from Customer Additional Details Maintenance. You must set up any parts discount list in Sales Order Processing.

Function

F16

Machine. Use this function to enter the equipment details on the Equipment Details Maintenance Screen.

F21

Text. Use this function to display a screen for entering free format text.



Select **F8=Update** to update the file.

Installation Equipment Maintenance Screen



To display this screen, enter the account number and the account address on the Installation Maintenance Selection Screen and press **Enter**.

Use this screen to enter the customer equipment details.

SS612M	Z1 - GB Demonstration Company	USER GBJBATD0	18/09/97
"BRUM" TRAINING & SERVICE BRANCH			12:41:57
Installation Equipment Maint.			
Account Number..... GC01		Account Address..... 000	
Account Name..... Reeves Chemist's			
Model..?.. █		Serial....	Quantity: _____
Model.....	Serial....	Quantity	Divn
- WA10	WAN0001	1	10
- WA10	WAN0002	1	10
- WA10	WAN0003	1	10
1=Select 4=Delete 5=Peripherals			
F3=Exit F4=Prompt F12=Previous F13=Fold/Truncate F15=Address			
F21=Text			
8-13 SA MW KS CL IM DM II EDN400A KB PKH317S1			

Fields:

Model

To add a piece of equipment, enter an existing model here.

Serial

To add a piece of equipment, enter the serial number here, in up to 15 alphanumerics. The number must have an associated model, and the model and serial number combination must be unique.

Quantity

Enter the quantity of this model at the customer site. This is in the range 1 to 9999999.



Tip: If you enter a serial number then you do not have to enter the quantity.

Untitled

Selection. Enter one of the following:

- 1 - To select the installation equipment record for maintenance.
- 4 - To delete the installation equipment record, so long as the equipment:
 - is not on a pending or active contract

- has no invoice pending records
- has no job-line records awaiting invoicing
- has no job-lines outstanding.

5 - To display the Equipment Configuration Screen, where you can enter brief details of the peripherals associated with the equipment.

Functions:

F13

Fold/Truncate. Use this function to toggle between displaying the model descriptions and the codes.

F15

Address. Use this function to display the Installation Name and Address Detail screen.

F21

Text. Use this function to add free format text to the item.



Press **Enter** to save any entered details, then select **F3=Exit**.

Equipment Detail Maintenance Screen



To display this screen, enter the model and serial number on the Installation Maintenance Selection Screen, or,

On the Installation Equipment Maintenance Screen, select a Model.

Use this screen to enter the details of the selected piece of equipment.

W0022		Z1 - GB Demonstration Company		USER GBJBANB1	22/04/98
		CENTRAL WORKSHOP			15:12:35
Equipment Detail Maintenance		UPDATE			
Location.....?..					
Site :-		Owner :-			
A/C No./Adr. GC01 000					
A/C Name.... Reeves Chemist's					
Model.....		PROJECTOR001	PROJECTOR		
Serial Number.....		6035993	Quantity	1	
Equipment Status..?..			Last Serviced	0/00/00	
VAT Calc Basis 1/2/3		3	VAT Code..?.. 001		
Model Year.....		00	Warranty mths 12	Warranty Expiry	
Installation Date...		0/00/00	Delivery date	0/00/00	
Department.....			Invoice Number		
Location.....					
Equipment Contact...		J JONES	Division	EL ELECTRONIC A	
Contract Number.....			Contract type		
Contract Start Date.		0/00/00	Inclusion date	0/00/00	
Engineer.....?..			Points		
Serviced by ourselves 0/1			Order type		
Under product superv. 0/1			Order No/line	/ 000	
F3=Exit F4=Prompt F8=Update F10=Warranty Parts F11=Delete F15=Site Addr					
F17=Owner Addr F20=Peripherals F21=Text F22=Add Msg F23=Rec. Msg					

Fields:

Location

Enter the location of the equipment.

Owner

Enter the customer and address who owns the piece of equipment at this location.

Leave blank, if the owner is the same as the site customer and address already specified.

Equipment Status

Enter a status for the equipment. You set up the status codes under parameter type STAT in the Codes/Parameter File Maintenance option.

VAT Calc Basis 1/2/3

Enter the customer VAT status for invoicing:

- 1 - VAT exempt. This is for export customers outside the EEC.
- 2 - Use VAT code entered in the VAT code field.
- 3 - Use VAT code set up for each Inventory item. This is the default.

VAT Code

Enter the VAT code. This defaults from the Customer Additional Details option.

Model Year

Enter the year of manufacture of the equipment.

Warranty Mths

Enter the number of months' warranty. This defaults from the warranty months set up for the model.

Warranty Expiry

Enter the date the warranty expires.

Installation Date

Enter the date of installation of the equipment. The installation date, plus the warranty months, gives the date when warranty expires. The date the warranty expires displays when you enter job line details.

Delivery Date

Enter the delivery date of the equipment.

Department

Enter a department to locate the equipment.

Invoice Number

Enter the number of the Sales Order Processing invoice.

Location

Enter the location of the equipment at the customer site. This displays on the job line details screen, used in call logging and engineer work allocation.

Equipment Contact

Enter the name of the person responsible for the equipment.

Engineer

Enter an engineer. If you set Assign Calls Only To Preferred Engineer For The Machine on the System Parameters Maintenance Screen 5, during automatic call allocation, the system allocates this engineer to calls for this piece of equipment.

Points

Enter a number of points used in the calculation of engineer work points.

Serviced By Ourselves

This is a memo field. Enter one of the following:

0 - If a third party services the equipment.

1 - If you service the equipment.

Under Product Superv

This is a memo field. Enter one of the following:

0 - If you do not require supervision on service calls.

1 - If you require supervision on service calls.

Functions:

F10

Warranty Parts. Use this option to display the Warranty Parts Window. Before displaying the window Workshop Management Saves any changes made to the equipment details.

F15

Site address. Use this function to display the Installation Name/Address Detail screen, with the site customer's details.

F17

Owner Address. Use this function to display the owner's name and address details on the Installation Name And Address Detail Screen.

F20

Peripherals. Use this function to enter details of peripherals for this machine.

F21

Text. Use this function to enter free format text.

F22

Add message. Use this function to enter a machine message.

F23

Receive message. Use this function to display messages for this machine.



Select **F8=Update** to save any details you have entered.

Equipment Configuration Screen (F20)



To display this screen, select **F20=Peripherals**, from the Equipment Detail Maintenance screen.

Use this screen to specify any peripheral attachments for the selected machine.

SS023	Z1 - GB Demonstration Company	GBJBATD0	18/09/97
"BAUM" TRAINING & SERVICE BRANCH			12:45:12
Equipment Configuration			
Model.....	WA10	Serial Number.....	WAN0001
Account Number.....	GC01	Account Address.....	000
Account Name.....	Reeves Chemist's		
Model:	Serial No.:	Ins.Date: <u>0/00/00</u>	
Qty:	Equip.Stat.: <u>L</u>		
Model	Serial	Install Date	Quantity
— BRA180	BRA00023	19/09/97	1
Eq.Stat. <u>L</u>			
1=Select 4=Delete			
F3=Exit F4=Prompt F8=Update F12=Previous			
F13=Fold/Truncate F21=Text			
9-9	SA	MW	KS CL IM DM II EDN400A KB PKH317S1

Fields:

Model

To add a peripheral, enter a valid peripheral model.



Note: When you add a peripheral, it must have either a serial number or a quantity defined to it.

Serial No

Enter a serial number for the peripheral.



Note: The combination of model and serial number must be unique.

Ins Date

Enter the installation date (DDMMYY).

Qty

Enter a quantity in the range 1 to 9999999.



Note: If you enter a serial number, then Workshop Management sets this field to 1.

Equip Stat

Enter the equipment status. This defaults to S.

You set up valid codes under parameter type STAT in Codes/Parameter File Maintenance.

Untitled

Selection. Enter one of the following:

- 1 - To select the peripheral for maintenance. You can only update the date, quantity and status.
- 4 - To delete the peripheral.

Functions:

F13

Fold/Truncate. Use this function to toggle between displaying part descriptions and the codes.

F21

Text. Use this function to enter free format text.



Select **F8=Update** to save any changes.

Send A Machine Message Screen (F22)



Select **F22=Add Message** from the Equipment Detail Maintenance screen to display this screen.

Use this screen to enter a message about this machine.

```
SS124              Z1 - GB Demonstration Company  USER GBJBATD0  18/09/97
                  "BAUM" TRAINING & SERVICE BRANCH 12:43:48
Send a Machine Message

Message from.... SUPERVISOR
Expiry date.... 99/99/99
Message.. All pre-95 WA10 models should be serviced as a matter of urgency..
_____
_____

Send to:

Model.....?.. WA10
and/or
Serial.....?.. WAN0001 to WAN0019
Or
Division / Model group / Sub-group...?..  /  / 

F3=Exit F4=Prompt F8=Send message F12=Previous

17-55  SA MW KS CL IM DM II EDN400A KB PKH317S1
```

Fields:

Message From

Enter up to 10 characters, to identify the sender by name, by job title or by user defined code.

Expiry Date

Enter the expiry date of the message.

The default is 99/99/99, so the message does not expire.

Message

Enter up to 3 x 65 character lines of free format text.

Model

Enter the model. This defaults from the Installation Maintenance Selection screen.

Serial

Enter either a single serial number or a range of serial numbers. This defaults from the Installation Maintenance Selection screen.



Note: If the message is for a machine with no serial number, enter the model and leave the serial number blank.

Or

Division/Model/Sub Group

Enter a product division, model and sub group, to send the message to.



Note: You must enter a division, but model and sub group are optional. However if you enter a sub group, you must also enter a model.



Note: The model and serial number fields must be blank.



Select **F8=Send Message** to send the message.

Machine Messages Window (F23)



To display this window, select **F23=Receive Message** from the Equipment Detail Maintenance screen.

Use this window to view any messages relating to the selected piece of equipment. This window shows:

- The message.
- The Date and time sent.
- Who sent the message.

```

SS022          Z1 - GB DEMO. SERVICE COMPANY      USER GBJBATD0  18/09/97
                "BAUM" TRAINING & SERVICE BRANCH    14:27:36
Equipment Detail Maintenance  UPDATE
Site :-
A/C No./Adr. GC01      000      Owner :-
A/C Name.... Reeves Chemist's      GC03      000
                                   The Make-Up Shop

Model..... WA10      WATER ANALYSER : 10-LITRES/MIN
Serial Number..... WAN0001      Quantity      1
Equipment Status.... L Leased      Last Serviced  0/00/00
VAT Calc Basis 1/2/3  3      VAT Code...?. 001
Model Year..... 00      Warranty mths  36
Installation Date... 16/09/97      Delivery date  16/09/97

Machine messages
-----
Model..... WA10
Message from.. HU001      Message ID..      23
Date sent..... 20/11/95      Time sent.. 15:34      Expiry Date.. 99/99/99

Message. This pump can only be totally stripped down 2-hours either side
of low tide.

Enter=Continue F11=Remove F12=Previous
F17=Owner Addr F20=Peripherals F21=Text      F22=Add Msg F23=Rec. Msg
-----
1-1      SA      MW      KS CL IM DM II      EDN400A      KB      PKH317S1
  
```



Press **Enter** to continue.

Serial Number Maintenance Screen (F9)



To display this screen, enter the model and serial number on the Installation Maintenance Selection screen, then select **F9=Serial Maint.**

Use this screen to enter the serial number for the selected model.

SS077	Z1 - GB Demonstration Company	USER GBJBATD0	18/09/97
	"BRUM" TRAINING & SERVICE BRANCH		12:48:26
<u>Serial Number Maintenance</u>			
Account Number.....	GC01	Account Address.....	000
Account Name.....	Reeves Chemist's		
Present Model.....	WA10	Serial....	WAN0001
<u>Enter Serial Numbers</u>			
Serial	History	Serial	History
_____	-		
F8=Exit F12=Previous			
14-2 SA MW KS CL IM DM II EDN400A KB PKH317S1			

Fields:

Serial

Enter a serial number which does not already exist.

You can enter serial numbers, in line with the equipment shown, up to a maximum quantity of 99. You do not have to allocate serial numbers for the entire quantity displayed.



Note: The change of serial number only comes into effect once you have run the Day End Routine option.

History

Enter one of the following:

0 - Not to hold the job history against this serial number.

1 - To hold all existing job history against this serial number.



Note: Where there is more than one serial number, you must enter 1 against at least one.



Press **Enter**, **F8=Update** displays. Select **F8=Update** to update.

Division Code Maintenance

1... 4/WOE **2...**

Use this option to define and maintain the divisions for a model family.

You use divisions, model groups and model sub-groups to organise models into a structured hierarchy within a product. You hold the contract rates, and possibly, scheduled visit profile codes at this level.

You must define divisions, model groups and model sub-groups before you can create the models within them.

Division Maintenance Screen



To display the Division Maintenance Screen, select Division Code, and enter a division.

Use this screen to select the division you want to maintain.

SS052	Demonstration Company CENTRAL BRANCH	USER BRERETM	28/10/93 13:56:17
Division Maintenance			
Division code..... 10		UPDATE	
Description..... <u>Environmental Monitoring</u>			
F3=Exit F8=Update F11=Delete F12=Previous			

Fields:

Description

Enter a description for the division, using up to 36 alphanumeric characters.



Press **Enter** to display the Division Maintenance Details Screen.

Division Maintenance Details Screen



To display this screen, press **Enter** on the Division Maintenance Screen.

Use this screen to enter the price list and charging information for the selected division.

```

SS052                Z1 - Demonstration Company          USER GBJBATD0    3/12/97
                      CENTRAL BRANCH                     15:58:23
Division Maintenance                                CHANGE
Division code.....10 Environmental Monitoring
Parts price list.....?..    Labour price list....?. PL4
Estimate/Quotation required . . . . . (0=No 3=Estimate 4=Quote)
Serial number mandatory at job creation . . . 0 (0/1)
Accessory list code . . . . . ?..
Certification required. . . . . (0/1)
% tolerance for estimates on customer stock . Value at this level (0/1) 0
                                           .00
% tolerance for estimates on own stock. . . . Value at this level (0/1) 0
                                           .00
Estimate creation fee . . . . . Value at this level (0/1) 0
                                           .00
Fixed price charge. . . . . Value at this level (0/1) 0
Warranty months . . . . . Value at this level (0/1) 1
                                           .6
Warranty Claims . . . . . Value at this level (0/1) 0

F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous

5-26  SR  MW  KS  CL  IM  DM  II  MARVIN  KB  PKH318S1
  
```

Fields:

Parts Price List

Select the parts price list to use for this division.

Labour Price List

Select the labour price list to use for this division.



Note: When Workshop Management prices a job, it searches for the labour price list in the following sequence: customer, then model, then model sub group, then model group and finally division.

Estimate/Quotation Required

Enter one of the following:

- 0 - If you do not require either an estimate or quotation.
- 3 - If you require an estimate.
- 4 - If you require a quotation.

Serial Number Mandatory at Job Creation

Enter one of the following:

- 0 - If you do not need to enter a serial number to book a job for this division.

1 - If you must specify the equipment's serial number to book a job.

Accessory List Code

Select the accessory list for this division.

Certification Required

This is a memo field. Enter one of the following:

0 - If you do not require certification.

1 - If you do require certification.

% Tolerance For Estimates On Customer Stock

Enter one of the following:

0 - If there is no tolerance on estimates for customer stock.

1 - If there is a tolerance on estimates for customer stock. Enter the percentage value of the tolerance in the field below this flag.

% Tolerance For Estimates On Own Stock

Enter one of the following:

0 - If there is no tolerance on estimates for your own stock.

1 - If there is a tolerance on estimates for your own stock. Enter the percentage value of the tolerance in the field below this flag.

Estimate Creation Fee

Enter one of the following:

0 - If there is no fee charged when you create an estimate.

1 - If there is a fee charged when you create an estimate. Enter the fee in the field below this flag.



Note: Workshop Management applies this fee, whenever you cancel a job for this division, after you have sent an estimate or quotation. You must remove the charge to prevent Workshop producing an invoice.

Fixed Price Charge

Enter one of the following:

0 - If you do not have a fixed price for this division.

1 - If you do have a fixed price for this division.

Warranty Months

Enter one of the following:

0 - If there are no warranty months for this division.

1 - If there are warranty months for this division. Enter the length of the warranty, in months, in the field below this flag.

Warranty Claims

Enter one of the following:

0 - If you do not allow warranty claims against this division.

1 - If you do allow warranty claims against this division.



To save the information and return to the
Division Maintenance Screen, select **F8=Update**.

Model Group Maintenance



5/WOE

Use this option to define and maintain the model groups for a model family.

You use divisions, model groups and model sub-groups to organise models into a structured hierarchy within a product. You hold the contract rates, and possibly, scheduled visit profile codes at this level.

You must define divisions, model groups and model sub-groups before you can create the models within them.

Model Group Maintenance Screen

-  To display the Model Group Maintenance Screen, select the Model Group option, and enter a division and model group.

Use this screen to select the model group, within the division, you want to maintain.

SS053	Demonstration Company CENTRAL BRANCH	USER BRERETM	28/10/93 13:56:52
Model Group Maintenance		UPDATE	
Division code.....	10 Environmental Monitoring		
Model Group.....	100		
Description.....	<u>Analysers</u>		
F3=Exit F8=Update F11=Delete F12=Previous			

Fields:

Description

Enter a description, for the model group, of up to 36 alphanumerics.

-  Press **Enter** to display the Model Group Maintenance Details Screen.

Model Group Maintenance Details Screen



To display this screen, press **Enter** on the Model Group Maintenance Screen.

Use this screen to enter the price list and charging information for the selected model group.

SS053	Z1 - Demonstration Company	USER GBJBATD0	3/12/97
	CENTRAL BRANCH		16:05:17
Model Group Maintenance		CHANGE	
Division code..... 10	Environmental Monitoring		
Model Group..... 100	Analysers		
Parts price list.....? 2	Labour price list....? ____		
Estimate/Quotation required 0 (0=No 3=Estimate 4=Quote)			
Serial number mandatory at job creation . . . 0 (0/1)			
Accessory list code ? ____			
Certification required. 0 (0/1)			
% tolerance for estimates on customer stock . Value at this level (0/1) 0			
.00			
% tolerance for estimates on own stock. . . . Value at this level (0/1) 0			
.00			
Estimate creation fee Value at this level (0/1) 1			
82.45			
Fixed price change. Value at this level (0/1) 0			
Warranty months Value at this level (0/1) 0			
Warranty Claims Value at this level (0/1) -			
F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous F14=Condition Maint.			
6-26 SR MW KS CL IM DM II MARVIN KB PKH318S1			

Fields:

Parts Price List

Select the parts price list to use for this model group.

Labour Price List

Select the labour price list to use for this model group.



Note: When Workshop Management prices a job, it searches for the labour price list in the following sequence: customer, then model, then model sub group, then model group and finally division.

Estimate/Quotation Required

Enter one of the following:

- 0 - If you do not require either an estimate or quotation.
- 3 - If you require an estimate.
- 4 - If you require a quotation.

Serial Number Mandatory At Job Creation

Enter one of the following:

- 0 - If you do not need to enter a serial number to book a job for this model group.

1 - If you must specify the equipment's serial number to book a job.

Accessory List Code

Select the accessory list for this model group.

Certification Required

This is a memo field. Enter one of the following:

0 - If you do not require certification.

1 - If you do require certification.

% Tolerance For Estimates On Customer Stock

Enter one of the following:

0 - If there is no tolerance on estimates for customer stock.

1 - If there is a tolerance on estimates for customer stock. Enter the percentage value of the tolerance in the field below this flag.

% Tolerance For Estimates On Own Stock

Enter one of the following:

0 - If there is no tolerance on estimates for your own stock.

1 - If there is a tolerance on estimates for your own stock. Enter the percentage value of the tolerance in the field below this flag.

Estimate Creation Fee

Enter one of the following:

0 - If there is no fee charged when you create an estimate.

1 - If there is a fee charged when you create an estimate. Enter the fee in the field below this flag.



Note: Workshop Management applies this fee, whenever you cancel a job for this model group, after sending an estimate or quotation. You must remove the charge to prevent Workshop Management producing an invoice.

Fixed Price Charge

Enter one of the following:

0 - If you do not have a fixed price for this model group.

1 - If you do have a fixed price for this model group.

Warranty Months

Enter one of the following:

0 - If there are no warranty months for this model group.

1 - If there are warranty months for this model group. Enter the length of the warranty, in months, in the field below this flag.

Warranty Claims

Enter one of the following:

0 - If you do not allow warranty claims against this model group.

1 - If you do allow warranty claims against this model group.

Functions:

F14

Condition Maint. Use this function to access the Condition/Symptom Code Maintenance Screen.



To save the information and return to the Model Group Maintenance Screen, select **F8=Update**.

Model Sub-Group Maintenance



6/WOE

Use this option to define and maintain the model sub-groups for a model family.

You use divisions, model groups and model sub-groups to organise models into a structured hierarchy within a product. You hold the contract rates, and possibly scheduled visit profile codes, at this level.

You must define divisions, model groups and model sub-groups before you can create the models within them.

Model Sub-Group Maintenance Screen



To display this screen, select the Model Sub-Group option, enter a division, model group and model sub-group.

Use this screen to select or enter the Model Sub-Group you want to maintain or define.

SS027	Demonstration Company CENTRAL BRANCH	USER BRERETM	28/10/93 13:57:29
Model Sub-Group Maintenance		UPDATE	
Division.....	10	Environmental Monitoring	
Model group.....	100	Analysers	
Model sub-group.....	100	<u>Atmospheric</u>	
F3=Exit F8=Update F11=Delete F12=Previous			

Fields:

Model Sub-Group Description

Enter a description for the Model Sub-Group of up to 20 alphanumeric characters.



Press **Enter** to display the Model Sub-Group Maintenance Details Screen.

Model Sub-Group Maintenance Details Screen



To display this screen, press **Enter** on the Model Sub-Group Maintenance Screen.

Use this screen to enter the price list and charging information for the selected model sub-group.

```

SS027          Z1 - Demonstration Company          USER GBJBATDO    3/12/97
                  CENTRAL BRANCH                      16:07:00
Model Sub-Group Maintenance                          CHANGE
Division code..... 10 Environmental Monitoring
Model Group..... 100 Analysers
Model Sub-Group..... 100 Atmospheric
Parts price list.....?. 001          Labour price list.....?. ____
Estimate/Quotation required . . . . . 0 (0=No 3=Estimate 4=Quote)
Serial number mandatory at job creation . . . 0 (0/1)
Accessory list code . . . . . ? . 003
Certification required. . . . . 0 (0/1)
% tolerance for estimates on customer stock . Value at this level (0/1) 1
                                           5.00
% tolerance for estimates on own stock. . . . Value at this level (0/1) 1
                                           50.00
Estimate creation fee . . . . . Value at this level (0/1) 0
                                           .00
Fixed price charge. . . . . Value at this level (0/1) 0
Warranty months . . . . . Value at this level (0/1) 0
Warranty Claims . . . . . Value at this level (0/1) 1
-----
F3=Exit F4=Prompt F8=Update F11=Delete F12=Previous
-----
7-26      SP      MW      KS CL IM DM II      MARVIN      KB      PKH318S1
  
```

Fields:

Parts Price List

Select the parts price list to use for this model sub-group.

Labour Price List

Select the labour price list to use for this model sub-group.



Note: When Workshop Management prices a job, it searches for the labour price list in the following sequence: customer, then model, then model sub group, then model group and finally division.

Estimate/Quotation Required

Enter one of the following:

- 0 - If you do not require either an estimate or quotation.
- 3 - If you require an estimate.
- 4 - If you require a quotation.

Serial Number Mandatory At Job Creation

Enter one of the following:

0 - If you do not need to enter a serial number to book a job for this model sub-group.

1 - If you must specify the equipment's serial number to book a job.

Accessory List Code

Select the accessory list for this model sub-group.

Certification Required

This is a memo field. Enter one of the following:

0 - If you do not require certification.

1 - If you do require certification.

% Tolerance For Estimates On Customer Stock

Enter one of the following:

0 - If there is no tolerance on estimates for customer stock.

1 - If there is a tolerance on estimates for customer stock. Enter the percentage value of the tolerance in the field below this flag.

% Tolerance For Estimates On Own Stock

Enter one of the following:

0 - If there is no tolerance on estimates for your own stock.

1 - If there is a tolerance on estimates for your own stock. Enter the percentage value of the tolerance in the field below this flag.

Estimate Creation Fee

Enter one of the following:

0 - If there is no fee charged when you create an estimate.

1 - If there is a fee charged when you create an estimate. Enter the fee in the field below this flag.



Note: Workshop Management applies this fee, whenever you cancel a job for this model sub-group, after sending an estimate or quotation. You must remove the charge to prevent Workshop Management producing an invoice.

Fixed Price Charge

Enter one of the following:

0 - If you do not have a fixed price for this model sub-group.

1 - If you do have a fixed price for this model sub-group.

Warranty Months

Enter one of the following:

0 - If there are no warranty months for this model sub-group.

1 - If there are warranty months for this model sub-group. Enter the length of the warranty, in months, in the field below this flag.

Warranty Claims

Enter one of the following:

0 - If you do not allow warranty claims against this model sub-group.

1 - If you do allow warranty claims against this model sub-group.



To save the information and return to the Model Sub-Group Maintenance Screen, select **F8=Update**.

Equipment Movement Maintenance



7/WOE

Use this option to transfer one or more pieces of equipment, from one installation address to another, for the same or a different account and to the same or a different branch.

You can also change the ownership of a piece of equipment.

Workshop Management transfers the equipment immediately. You move the equipment to the administrative branch, defined on the additional service details, of the site receiving the equipment.

Implications

You cannot transfer equipment if any of the following apply:

- It is currently active on a service contract.
- It has any incomplete jobs on it.
- It has any invoices pending generation.
- The owner is not the customer account (you have specified an override). If you are transferring more than one piece of equipment, and have specified an override owner on any of that equipment, Workshop Management suspends the transfer of all the equipment.



Note: Workshop Management flags a completed job for pricing and invoicing, even if it has no chargeable elements, as these routines also perform the costing, calculate response times and transfer the job to the history file.

Equipment Movement Maintenance Initial Screen



To display this screen, select the Equipment Movement option.

Use this screen to select either the customer, or model, you want to move.

SS070	Z1 - GB Demonstration Company	USER GBJBATD0	6/10/97
	"BRUM" TRAINING & SERVICE BRANCH		12:26:42
Equipment Movement Maintenance			
Model.....?.. WA10			
Serial Number.....			
Account Number...?..			
Account Address.....			
F3=Exit F4=Prompt			
6-28 SA MW KS CL IM DM II STUD140 KB PKH317S1			

Fields:

Model

Enter a model. Then press **Enter** to display a list of equipment for that model.

Serial Number

If you entered a model, enter the serial number of the equipment to transfer.



Note: If there is no equipment, then enter an account, to switch the search to customer.

Account Number

Enter the customer whose equipment you want to transfer.

Account Address

If you enter an account number, enter the account address.



Note: The administrative branch of the account address entered, must be the branch you are currently using.



Enter the selection details and press **Enter** to display the Equipment Selection Screen.

Equipment Selection Screen



To display this screen, on the Equipment Movement Maintenance Initial Screen, enter the selection details and press **Enter**.

If you entered a model on the Equipment Movement Maintenance Initial Screen, then this screen lists all the equipment for that model.

If you entered the account number and address on the initial screen, then this screen lists all the equipment for that location.

SS620	Z1 - GB Demonstration Company	USER GBJBATD0	6/10/97
	"BRUM" TRAINING & SERVICE BRANCH		12:26:54
Equipment by Model			
Search Argument: WA10			
1	Serial Number	Account Loc	Account Name.....
■	WAN0001	GC01 000	Reeves Chemist's
-	WAN0002	GC01 000	Reeves Chemist's
-	WAN0003	GC01 000	Reeves Chemist's
1=Select			
F3=Exit F12=Previous F13=Fold/truncate			
7-2 SA MW KS CL IM DM II STUD140 KB PKH317S1			

Fields:

Untitled

Selection. Enter 1 to select the required equipment.



Note: If, instead of a serial number, the screen shows a quantity (Qty), there are one or more pieces of equipment for that model without specific serial numbers.

Functions:

F7

Transfer All. This is available if you entered a customer account on the Initial screen rather than a model. Use this function to transfer every piece of equipment listed to another site.



Select the required equipment and press **Enter** to display the Move Single Piece Of Equipment Screen.

Move All Equipment Screen (F7)



To display this screen, on the Equipment Selection Screen, select **F7=Transfer**.

Use this screen to move all the equipment to an account you specify.



Note: The equipment cannot be on a service contract or owned by an override owner.

```

SS075                Z1 - GB Demonstration Company    USER GBJBATD0    6/10/97
                   "BAUM" TRAINING & SERVICE BRANCH    12:28:03

Move All Equipment

Account Number..... GC01      Account Address..... 000

Account Name..... Reeves Chemist's
Account Address..... 31 Lenton Boulevard
                   Lenton
                   Nottingham
                   England

Post Code          NG7    4FW
Telephone Number   0602 230067      Ext No.
Admin Branch Code  BT "BAUM" TRAINING & SERVICE BRANCH
Account Contact.... Michael Wello    Region.... WM
Statement Code     GC01              Invoice Address   GC01      000

New Account Number.....          Account Address.....
New Account Name.....

F3=Exit F8=Update F12=Previous

20-32  SR  MW  KS  CL  IM  DM  II  STUD140  KB  PKH317S1
  
```

Fields:

New Account Number

Enter the customer account to move the equipment to.

Account Address

Enter the address to move the equipment to.



Tip: The admin branch on the new site's additional service details record determines the branch Workshop Management moves the equipment to.



Specify the account to move the equipment to, then select **F8=Update** to transfer all the equipment.

Move Single Piece Of Equipment Screen



To display this screen, on the Equipment Selection Screen, select a single item of equipment to transfer.

Use this screen to enter the new location details for the equipment.

W0076	Z1 - UK Demonstration Company	USER GBJBANB4	12/02/98
	CENTRAL WORKSHOP		15:48:56
Move Single Piece of Equipment			
Site :-		Owner :-	
A/C No./Adn. C01	000		
A/C Name.... Collection document slu31125			
Model.....	LITESH0W500	Quantity	1
Serial Number.....	LML0202098/01		
Equipment Status....			
Model Year.....	00	Warranty Months	12
Installation Date...	0/00/00	Delivery Date.....	1/01/97
Department.....		Last Serviced	0/00/00
Location.....			
Equipment Contact...			
Division.....	EL	Points	
Escalation Hours	Works Order Number	Loan	
New Account Number.....		New Account Address.....	
New Account Name.....			
F3=Exit F8=Update F12=Previous			

Fields:

Owner

Enter the owner's name and address. This defaults from the installation information.

Department

Enter the department of the equipment. This defaults from the installation information.

Location

Enter the location of the equipment. This defaults from the Installation details and displays on the Job Line Details Screen.

Equipment Contact

Enter the name of the person responsible for the equipment. This defaults to the equipment contact from the installation details for the machine.

New Account Number

Enter an account to move the equipment to.

New Account Address

Enter a location (address) to move the equipment to.



Tip: The administrative branch in the new site's additional details is the equipment's new branch.



Select **F8=Update** to transfer the equipment.

Volume Segment Maintenance



8/WOE

Use this option to categorise the usage volume for equipment at model level, and to set the basis for repeat call calculations.

Concepts

Equipment usage volume influences both the response time for calls and the calculation which determines if a subsequent call is a repeat call.

The two numeric character volume segment code is user defined, within the range 01 - low to 99 - high. It is one of the factors in the 3-D Matrix Workshop Management uses to calculate a reduction in response times; the other factors are customer priority and whether the machine is working.

A repeat call may depend on volume throughput or the number of days between visits, other user defined factors. Whether a call is a repeat, or not, affects the default job category displayed on the Job Line Details Screen.



Note: You must set up at least one volume segment code. The code is a mandatory field on models because Workshop Management uses it to calculate response times.

Volume Segment Maintenance Selection Screen



To display the Volume Segment Maintenance Selection Screen, select the Volume Segment Maintenance option.

Use this screen to select or define the volume segment you want to maintain or add.

Fields:

Volume Segment

Enter a new, or existing, numeric code to add, or amend, the volume segment.



Enter a code, then press **Enter** to display the Volume Segment Maintenance Detail Screen.

Volume Segment Maintenance Detail Screen



To display this screen, on the Volume Segment Maintenance Selection Screen, enter a code, and press **Enter**.

Use this screen to define or maintain the Volume Segment Maintenance details.

SS056	Demonstration Company	USER BRERETM	9/04/94
	CENTRAL BRANCH		11:55:56
Volume Segment Maintenance			
Volume segment..... 30	UPDATE		
Description.....	High Volume Equipment		
Minimum copy volume per month.....	1000		
Maximum copy volume per month.....	12000		
Average copy volume per month.....	14000		
Volume band width.....	5000		
Volume between calls.....	0		
No. of days between calls.....	30		
Both tim/vol. used in repeat calc....	0 (0 OR 1)		
F3=Exit F8=Update F11=Delete F12=Previous			

Fields:

Description

Enter a description for the volume segment.

Minimum Copy Volume Per Month

Enter the minimum copy volume per month. You cannot enter decimals.

Maximum Copy Volume Per Month

Enter the maximum copy volume per month. You cannot enter decimals.

Average Copy Volume Per Month

Enter the average copy volume per month. You cannot enter decimals.
Workshop Management uses this in contract invoicing, if the actual volume data is not available, to calculate the daily average for copy estimates.

Volume Band Width

Enter the volume band width. You cannot enter decimals.

Volume Between Calls

This is the volume field which you can use when calculating a repeat call. Enter up to 9 numerics. You cannot enter decimals.



Note: If you only use time to calculate repeat calls, leave this field at zero.

No Of Days Between Calls

This is the time field which you can use when calculating a repeat call. Enter the number of days, in the range 0 to 999.



Note: Leave this field at zero, if you only use volume to calculate repeat calls.

Both Tim/Vol Used In Repeat Calc

Enter one of the following:

0 - If you use either time or volume, but not both, in the repeat call calculation.

1 - If you use both time and volume in the repeat call calculation. You must enter a value greater than 0 in both the Volume Between Calls, and the No Of Days Between Calls fields.



To save any changes, select **F8=Update**.

Accessory Code



12/WOE

Use this option to maintain lists of standard accessories.



Note: The items you add to the accessory list must be valid Inventory items.

You can specify which accessory list a model uses. When you book that model into the workshop, Workshop Management looks at the accessory list, and, if it identifies any item on the list as Supply Required, warns you that you should not process the job any further until you receive the accessory.

Accessories Code Maintenance Selection Screen



To display this screen, select the Accessory Code (Maintenance) option.

Use this screen to select, or enter, the accessory list you want to maintain.

Fields:

Accessory Code

Enter an accessory code of three alphanumeric characters to create an accessory list, or

Select the accessory list you want to maintain.



Note: When you change an accessory list, Workshop Management does not update workshop jobs with the accessory list attached. The jobs continue to completion with the accessory list attached when you created the job.



To display the Accessories Code Maintenance Details Screen, select an accessory list.

Accessories Code Maintenance Details Screen



To display this screen, on the Accessories Code Maintenance Selection Screen, select an accessory list.

Use this screen to define the items on the accessory list.

W0092		Z1 - Demonstration Company		USER GBJBATD0		3/12/97	
		CENTRAL BRANCH		UPDATE		16:24:31	
Accessories Code Maintenance							
Accessory Code..... 001				Accessories for Colour TV			
Accessory				Supp	Reqd	Qty	
AERIAL		External Aerial		1		2	
LEADS		Power Leads		1		2	
MANUAL		Instruction Manual		1		4	
PLUG		Plug		1		1	
				0			
				0			
				0			
				0			
				0			
				0			
				0			
F3=Exit F8=Update F11=Delete F12=Previous							
5-34		SA	MW	KS	CL	IM	DM II MARVIN KB PKH318S1

Fields:

Accessory Code

Enter a description for the accessory list.

Accessory

Enter an inventory item.

Supp Reqd

Enter one of the following:

0 - If you do not require the supply of this item when you create a job for a model with this accessory list attached.

1 - If you require the supply of this item when you create a job for a model with this accessory list attached.

Qty

Enter the number of items required per model. You cannot enter decimals.



To save the information and return to the selection screen, select **F8=Update**.

Customer Account Enquiry

1... 31/WOE
2...

Use this option to enquire on the details of customer accounts.

Customer Account Enquiry Selection Screen



To display the Customer Account Enquiry Selection Screen, select the Customer Account (Enquiries) option.

Use this screen to select the customer account for which you want to display the details.

Fields:

Customer Number

Enter an existing customer.



Enter a customer and press **Enter** to display the Customer Account Enquiry Detail Screen.

Customer Account Enquiry Detail Screen



To display this screen, enter a customer account number on the Customer Account Enquiry Selection Screen, and press **Enter**.

SS515		Service Demonstration		USER SSV3		11/12/95	
		CENTRAL BRANCH				13:55:20	
Customer Account Enquiry							
Account No. C03							
Name		Seigler & Jones Ltd		Al.Seq.		JONES	
Address 1		Unit 7					
Address 2		Seaview Business Park					
Address 3		Swansea					
Address 4		W. Glamorgan					
Address 5				P/Code		SA1 5 AA	
Contact							
Phone No.		01792 852001					
Pay Terms		D		30 Ledger Type		B=Bal.Fwd. Currency GBP	
VAT Code		100		VAT Indic.		3 E=Exempt	
Cr. Limit		50000.00		Code		Insured .00	
Cr. Resp.		100		St.Addr.Code		C03 In.Addr.	
St. Copies		1		Code/Message		Consol. 0	
Gen.Ledger				Control A/C		210003 Bank A/C	
Group 1		2		3		4	
Remarks							
Salesman		Sales Region		Activity		Suspend/Delete.	
F3=Exit F12=Previous							
01-02		SC		MK		KS IM II KENB20A PET113S1	

This screen displays the customer details including:

- Customer's name and address.
- Contact name and telephone number.
- Customer's payment details.
- Credit limit, status and responsibility.
- Statement and invoice address.
- GL bank and account details.
- Sales representative and region.



Press **Enter** to display the Additional Details Enquiry Screen 1.

For full details of these enquiry screens, see the Customer Additional Details Enquiry section.

Installation Address Enquiry



32/WOE

Use this option to enquire on customer site addresses.

Installation Address Enquiry Selection Screen



To display the Installation Address Enquiry Selection Screen, select the Installation Address (Enquiries) option.

Use this screen to select the customer and address for which you want to display the details.

SS516	Demonstration Company	USER BRERETM	28/10/93
	CENTRAL BRANCH		14:04:52
Installation Address Enquiry			
Please Enter Account Number..... C03			
Account Address..... 000 BLANK - display list			
F3=Exit F4=Prompt			

Fields:

Account Number

Enter the customer you want to enquire on.



Tip: To display a list of addresses for this customer, leave the address blank, and press **Enter**.

Account Address

Enter an existing customer address.



Enter a customer and an address, then press **Enter** to display the Installation Address Enquiry Detail screen.

Installation Address Enquiry Detail Screen



To display this screen, enter a customer and address code on the Installation Address Enquiry Selection Screen, then press **Enter**.

This screen displays the address and contact details for the selected customer address.

SS516	Demonstration Company	USER BRERETM	28/10/93
	CENTRAL BRANCH		14:05:02
Installation Address Enquiry			
Account Number.....	C03	Jones and Crossland Ltd.	
Account Address.....	000		
Account Name.....	Jones and Crossland Ltd.		
Address 1	Unit 7		
Address 2	Stonebow Road Trading Estate		
Address 3	Hereford		
Address 4			
Address 5			
Contact	Mr Ian Jones	P/Code	CT1 1PC
Phone No.	0432 264124		
Group 1	OSL	2 PR1	3 GR2 4 CG2
Remarks			
Salesman	SAL2	Region....	RG2 Activity Suspend/Delete.
F3=Exit F12=Previous			



Note: For a description of the fields, please refer to the Installation Address Maintenance section of the product information.



Press **Enter** to display the Additional Details Enquiry Screen 1.

For more details of these enquiry screens, see the Customer Additional Details Enquiry section.

Customer Additional Details Enquiry



33/WOE

Use this option to enquire on Workshop Management settings for a customer site address.

You can also access the screens which make up this option from within the Customer Account Enquiry and the Installation Address Enquiry.

Additional Details Enquiry Selection Screen



To display the Additional Details Enquiry Selection Screen, select the Customer Additional Details (Enquiries) option.

Use this screen to select the customer for which you want to see the details.

SS517	Demonstration Company	USER BRERETM	15/12/93
	CENTRAL BRANCH		14:27:29
Service Additional Details Enquiry			
Account Number..... C03			
Enter Location Code 000			
...following is a list of existing location address codes.			
Locn	Name	Address Line 1	
000	Jones and Crossland Ltd.	Unit 7	
001	Jones & Crossland (Northern) Ltd	Unit 5	
F3=Exit F12=Previous			

Fields:

Please Enter Account Number

Enter the customer you want to enquire on and then press **Enter**.

This displays the following field:

Enter Location Code

Enter a site address for the selected customer.



Tip: Leave this field blank and press **Enter** to display a list of all the available addresses for the selected customer.



Press **Enter** to display the Additional Details Enquiry Screen 1.

Additional Details Enquiry Screen 1



To display this screen, on the Additional Details Enquiry Selection Screen, select a customer and address, then press **Enter**.

```
SS517          Z1 - Demonstration Company      USER GBJBATD0   4/12/97
                  CENTRAL BRANCH                10:09:59
Additional Details Enquiry : Service System

Account No. C03      La Perfumerie Agnes
Locn. Code  000

Account Phone Extension..... 4200
Invoice Destination Address A/c.: C03
and Sequence..... 000
Contact..... MR JONES
Sundry Account..... 0      (0=A/C Cust 1=Proforma 2=Invoice Cust)
Internal Customer..... 0      (1=yes 0=no)
Region..... CT      Central
Admin. Branch..... CT
Invoice Consolidation Level..... 3      (1=Account 2=Location 3=Job/Contract)
Customer Ref. for Job..... 0      (1=yes 0=no) Parts Price List.... GBP
Customer Ref. for Contracts..... 0      (1=yes 0=no) Parts Discount List.:
Currency Customer (0/1)..... Labour Price List... PL1
Currency Code..... GBP      Currency Rate Code... GBP
VAT Code..... 002

F3=Exit F5=Trade Details F12=Reselect Account/Code
```

The information displayed includes the following:

- Account contact phone extension.
- Invoice details.
- Sundry account details.
- Branch.
- Region.
- Customer references.
- Price and discount lists.
- Currency information.

For more details on the fields, see the Customer Additional Details Maintenance section.

Functions:

F5

World Trade. Use this function to display the World Trade details.



Press **Enter** to display the Additional Details Enquiry Screen 2.

Additional Details Enquiry Screen 2



Press **Enter** on the Additional Details Enquiry Screen 1 to display the Additional Details Enquiry Screen 2.

SS517	Z1 - Demonstration Company	USER GBJBATD0	4/12/97
	CENTRAL BRANCH		10:13:53
Additional Details Enquiry : Service System			
Account No. 003 La Perfumerie Agnes			
Locn. Code 000			
Customer Priority.....: 3			
Customer Calendar Code.....:			
Geographic Code.....: CT1 1PC			
Service Telephone Number.....:			
Service Telephone Extension.....: 3456			
Service Fax Number.....: 0432 264300			
Charge Standard Distance Value...: 1 (1/0)			
Standard Mile/Km Value.....: 10.00			
Charge Actual Distance Driven...: 0 (1/0)			
Charge per Mile/Km.....: .00			
Charge Zones.....: 0 (1/0)			
Zone Code to Charge.....:			
Job discount.....: 50.00		Warranty Claim...: 0	
Service account.....:		Location code...: 222	
Warranty Claim Labour Credit List....:		Fixed/Hourly....: 0 (0/1)	
F3=Exit F4=Prompt F12=Previous			

The information displayed includes the following:

- Customer priority.
- Customer calendar.
- Geographic code.
- Service telephone and fax numbers.
- Travel charges information.
- Warranty information.

For more details on the fields, see the Customer Additional Details Maintenance section.



Press **Enter** on the Additional Details Enquiry Screen 2 to display the Additional Details Enquiry Screen 3.

Additional Details Enquiry Screen 3



Press **Enter** on the Additional Details Enquiry
Screen 2 to display the Additional Details Enquiry
Screen 3.

W0517	Z1 - GB Demonstration Company	USER GBJBANB1	22/04/98
	CENTRAL WORKSHOP		15:32:50
Additional Details Enquiry : Service System			
Account No. PLCUS001 PL Testing Company			
Locn. Code 000			
Customer Opening Hours:-			
Day	Day 1	From 8:00	To 18:00
	Day 2	From 8:00	To 18:00
	Day 3	From 8:00	To 18:00
	Day 4	From 8:00	To 18:00
	Day 5	From 8:00	To 15:00
	Day 6		
	Day 7		
F3=Exit F12=Previous			

This screen displays the customer's opening hours in 24 hour clock times.
Between the From and To times for a day, the customer accepts service calls.



Select **F3=Exit** to return to the menu.

Model File Enquiry




34/WOE

Use this enquiry to display the model details.

Model Enquiry Selection Screen

 Select the Model File Enquiry option to display the Model Enquiry Selection screen.

Use this screen to select the model whose details you want to display.

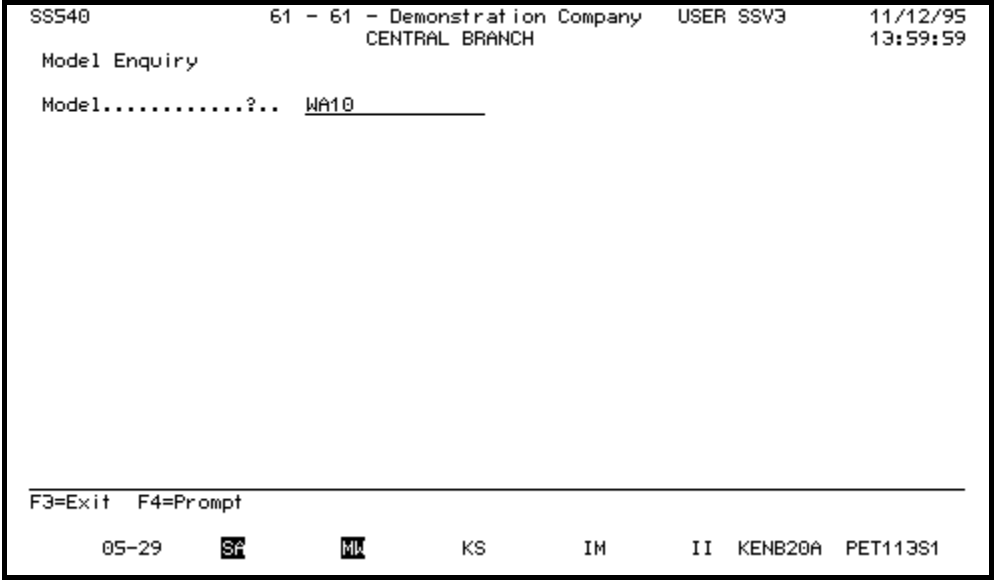

The screenshot shows a terminal window with the following text:

```
SS540          61 - 61 - Demonstration Company  USER SSV3      11/12/95
                  CENTRAL BRANCH                13:59:59

Model Enquiry

Model.....?..  WA10

F3=Exit  F4=Prompt

05-29  SP  MK  KS  IM  II  KENB20A  PET113S1
```

Fields:

Model

Enter an existing model.

 Press **Enter** to display the Model Enquiry Details Screen 1.

Model Enquiry Details Screen 1



To display this screen, enter a model and press **Enter** on the Model Enquiry Selection screen.

SS540	Demonstration Company	USER BRERETM	16/12/93
	CENTRAL BRANCH		13:58:05

Model Enquiry

Model WA10

Description..... WATER ANALYSER : 10-LITRES/MIN

Division 10

Model Group 100

Model Sub Group 100

Machine/Peripheral (0/1).. 0

Labour Price List PL1

Visit Profile Code 2PA

Points

Inventory item codes:-

F3=Exit F12=Previous

The information displayed includes the following:

- Model code and description.
- The model's division, group and sub-group.
- Whether the machine is a peripheral.
- Labour price list.

For more details on the fields, see the Model Detail Maintenance section.



Press **Enter** on the Model Enquiry Detail Screen 1 to display the Model Enquiry Detail Screen 2.

Model Enquiry Detail Screen 2

 To display this screen, press **Enter** on the Model Enquiry Detail Screen 1.

W0540	Z1 - GB Demonstration Company	USER GBJBANB1	22/04/98
	CENTRAL WORKSHOP		15:33:33
Model Enquiry			
Model Number..... PROJECTOR001		PROJECTOR	
Van kit number to fix.....			
Av. hours per breakdown.... 2		Av. hours per PM visit.... 2	
Workshop preparation..... 0		Engineer required for Installation.	
Manufacturers ID..... CARR		Carrier Engineering	
Warranty Months..... 12		Volume segment ID..... 10	
Automatic call assignment.. 1		Configuration code... L Lensatic Sight	
Statistical family field 1.		Field 2. Field 3.	
Number of meters..... 0		Digits meter1. 0 Digits meter2. 0	
Warranty Units..... 0			
Copies = 1 fill toner.....		Copies = 1 fill developer.	
Volume band starting seq...			
Target MTTR.....		Target MCBV..... 0	
Target MTBV..... 0		Target cost per copy..... .00	
F3=Exit F12=Previous			

The information displayed on this screen includes:

- Average number of hours for a breakdown and maintenance visit.
- If you require an engineer for the installation.
- Manufacturer.
- Whether you automatically assign calls for this model.
- Number and format of meters on the model.
- Number of copies expected from each toner and developer fill.
- Volume Segment ID used to calculate repeat calls.
- Target repair time, copies between visits, days between visits and cost per copy.

For more details on the fields, see the Model Detail Maintenance section.

 Press **Enter** to display the Model Enquiry Details Screen 3.

Model Enquiry Details Screen 3



To display this screen, press **Enter** on the Model Enquiry Details Screen 2.

W0540	Z1 - GB Demonstration Company	USER GBJBANB1	22/04/98
	CENTRAL WORKSHOP		15:34:00
Model Enquiry			
Model Number..... PROJECTOR001			
Parts Price List.....			
Estimate / Quotation required..... 0			
Serial number mandatory at job creation..... 0			
Accessory List Code.....			
Certification required..... 0			
% tolerance for estimates on customer stock. Value at this level (0/1) 0			
% tolerance for estimates on own stock..... Value at this level (0/1) 1			
30.00			
Estimate creation fee..... Value at this level (0/1) 1			
50.00			
Fixed price charge..... Value at this level (0/1) 0			
Warranty months..... Value at this level (0/1) 1			
12			
Warranty Claims Value at this level (0/1) 1			
Default Labour Credit Model For Claims. . . . Value at this level (0/1) 0			
F3=Exit F12=Previous F14=Warranty Parts			

The information displayed includes the following:

- Parts price list.
- Whether you require a quotation or estimate.
- Accessory list code.
- Percentage tolerance for estimates.
- Estimate creation fee.
- Fixed price charge.
- Length of warranty.
- Whether you allow warranty claims on this model.

For more details on the fields, see the Model Detail Maintenance section.

Functions:

F14

Warranty Parts. Use this function to display the Warranty Parts Enquiry Window.



Press **Enter** to exit from the Model Enquiry.

Warranty Parts Enquiry Window

 To display this window, select **F14=Warranty Parts** on the Model Enquiry Detail Screen 3.

W0540	Z1 - GB Demonstration Company CENTRAL WORKSHOP	USER GBJBANB1	22/04/98 15:34:00
Model Enquiry			
Model Number..... PROJECTOR001			
Parts Price List.....			
Estimate / Quotation required..... 0			
Serial number mandatory at job creation..... 0			
Warranty Parts Enquiry			
Part Number (?)	Description	Mths	0/1) 0
25022	Purchased Item	2	0/1) 1
			30.00
			0/1) 1
			50.00
			0/1) 0
F12=Previous			0/1) 1
			12
Warranty Claims			Value at this level (0/1) 1
Default Labour Credit Model For Claims.			Value at this level (0/1) 0
F3=Exit F12=Previous F14=Warranty Parts			

This screen displays a list of all the parts covered by this machine's warranty.

 Select **F12=Previous** to return to the Model Enquiry Details Screen 3.

Installation Details Enquiry



35/WOE

Use this option to enquire on the equipment held on customer sites.

Installation Details Enquiry Selection Screen



Select the Installation Details (Enquiries) option to display the Installation Details Enquiry Selection Screen.

Use this screen to select the installation for which you want to display the details.

W0520	Z1 - GB Demonstration Company	USER GBJBANB1	22/04/98
	CENTRAL WORKSHOP		15:37:27
Installation Details Enquiry			
Model.....?.. _____			
Serial Number..... _____			
Site:			
Account Number...?.. _____			
Account Address..... _____			
Owner:			
Account Number...?.. _____			
Account Address..... _____			
All Branches.(0/1).. <u>0</u>			
F3=Exit F4=Prompt F15=Address F16=Machine			

Fields:

Model

Enter the model to enquire on.



Note: Do not select a peripheral, as Workshop Management holds peripherals against a machine and you can enquire on them from the Equipment Detail Enquiry Screen.

Serial Number

Enter a serial number.



Tip: If you only enter a model number, a list of all serial numbers for this model, with the associated account or locations, displays.

Site

Account Number

Enter an existing customer.

Account Address

Enter an address for the specified customer.

Owner

Account Number

Enter an existing customer.

Account Address

Enter an address for the specified customer.

All Branches

Enter one of the following:

0 - To display the installation details for the default branch.

1 - To display the installation details for all the branches.

Functions:

F15

Address. Enter a site name and address to display the Installation Details

Enquiry. Enter the owner name and address to display the Ownership Address Enquiry.

F16

Machine. Enter a site name and address to display the Installation Equipment Enquiry. Enter the owner name and address to display the Installation Equipment by Owner.



Do one of the following:

- Enter the account number and account address and select **F15=Address** to display the Installation Details Enquiry Screen.
- Enter the site account number and account address and select **F16=Machine** to display the Installation Equipment Enquiry Screen.
- Enter the model and serial number and press **Enter** to display the Equipment Detail Enquiry Screen.

Installation Address Enquiry Screen (F15)



To display this screen, select **F15=Address** on the Installation Details Enquiry screen.

SS521	Z1 - GB Demonstration Company		USER GBJBATD0	19/09/97
	"BRUM" TRAINING & SERVICE BRANCH			14:26:36
Installation Address Enquiry ENQUIRY				
Model.....	WA10	Account Address.....	WAN0001	
Account Number.....	GC01			
Account Name.....	Reeves Chemist's	Currency customer 1		
Account Address.....	31 Lenton Boulevard	Currency code....	GBP	
	Lenton	Curr rate code....	SSV3	
	Nottingham	VAT code.....	001	
	England	Parts Price List	GB\$	
		Parts Discount List		
Post Code	NG7 4FW	Ext No.	Inv.Cons Lev.	3
Telephone Number	0602 230067	Admin Branch Code	Job Ref.	0
Account Contact.....	Michael Wello	Region....	Contract Ref.	0
Statement Code	GC01	Invoice Address	GC01	000
F3=Exit F12=Previous F16=Header				
F21=Text				
1-1	SA	MM	KS CL IM DM II	EDN400A KB PKH317S1

The information displayed includes the following:

- Installation address and telephone number.
- Administration branch.
- Contact.
- Region.
- Currency information for the account.
- Price and discount lists.
- Job and contract references.
- Invoice address.

For more details on the fields, see the Installation Address Maintenance section.

Functions:

F16

Header. Use this function to display the Equipment Detail Enquiry Screen.

F21

Text. Use this function to display the site address text.



Select a function key or select **F3=Exit** to return to the menu.

Equipment Detail Enquiry Screen



To display this screen, enter a model and serial number on the Installation Details Enquiry screen and press **Enter**.

W0522	Z1 - GB Demonstration Company	USER GBJBANB1	22/04/98
	CENTRAL WORKSHOP		15:39:13
Equipment Detail Enquiry			
Site :-		Owner :-	
A/C No./Adr. PLCUS001 000			
A/C Name.... PL Testing Company			
Model.....	PROJECTOR001	Quantity.....	
Serial Number.....	1234	Last Serviced..	0/00/00
Equipment Status.....		Warranty Units	
VAT Calc Basis 1/2/3..	VAT Code...	Warranty Expiry	0/00/00
Model Year.....	00 Warranty Mths..	Delivery Date..	0/00/00
Installation Date.....	0/00/00	Invoice Number:	
Department.....		Division.....	
Location.....		Contract Type..	
Equipment Contact....		Inclusion Date:	0/00/00
Contract Number.....		Points.....	
Contract Start Date..	0/00/00	Order Type....	
Engineer.....		Order No/Line..	/ 000
Serviced By Ourselves	0/1		
Under Product Superv.	0/1		
F3=Exit F10=Warranty Parts F12=Previous F15=Site Address F17=Owner Address			
F20=Peripherals F21=Text F23=Messages			

The information displayed includes:

- Model and serial number.
- Installation date and location.
- Last service date.
- Warranty length.
- Contract details.
- Who does the servicing.
- Order information.

For more details on the fields, see the Installation Details Maintenance section.

Functions:

F10

Warranty Parts. Use this function to display the Equipment/Warranty Part Enquiry Window.

F15

Address. Use this function to display the Installation Address Enquiry screen.

F20

Peripherals. Use this function to display the Equipment Configuration Enquiry screen.

F21

Text. Use this function to display any existing text.

F23

Messages. Use this function to display any existing machine messages.



Select a function key or select **F3=Exit** to return to the menu.

Equipment Configuration Enquiry Screen (F20)



To display this screen, select **F20=Peripherals** on the Equipment Detail Enquiry Screen.

```
SS523          Z1 - GB Demonstration Company      GBJBATD0  19/09/97
               "BRUM" TRAINING & SERVICE BRANCH    14:29:00
Equipment Configuration Enq'y

Model..... WA10          Serial Number..... WAN0001
Account Number..... GC01    Account Address..... 000
Account Name..... Reeves Chemist's

      Model      Serial      Install Date  Quantity  Eq.Stat.
      BRA180     BRA0023     19/09/97      1         L

-----
F3=Exit  F12=Previous  F13=Fold/Truncate  F21=Text
-----
1-1      SA      MW      KS  CL  IM  DM  II      EDN400A  KB  PKH317S1
```

This screen displays the model, serial number, installation date and quantity of peripherals for the selected model.

For more details on the fields, see the Installation Detail Maintenance section.

Functions:

F13

Fold/Truncate. Use this function to toggle between displaying the model description and the codes.

F21

Text. Use this function to display any existing text.



Select **F12=Previous** to return to the Equipment Detail Enquiry Screen.

Machine Messages Window (F23)



To display the Machine Messages window, select **F23=Messages** on the Equipment Detail Enquiry Screen.

SS522	Z1 - GB Demonstration Company	USER GBJBATD0	19/09/97
	"BAUM" TRAINING & SERVICE BRANCH		14:29:20
Equipment Detail Enquiry			
Site :-		Owner :-	
A/C No./Adr. GC01 000		GC03 000	
A/C Name.... Reeves Chemist's		The Make-Up Shop	
Model.....	WA10	WATER ANALYSER : 10-LITRES/MIN	
Serial Number.....	WAN0001	Quantity 1	
Equipment Status....	L Leased	Last Serviced 0/00/00	
VAT Calc Basis 1/2/3	3 VAT Code... 001	Warranty Units	
Model Year.....	00	Warranty mths 36	
Installation Date...	16/09/97	Delivery date 16/09/97	
Machine messages			
Model..... WA10			
Message from.. HV001		Message ID.. 23	
Date sent..... 20/11/95		Time sent.. 15:34	
		Expiry Date.. 99/99/99	
Message. This pump can only be totally stripped down 2-hours either side of low tide.			
Enter=Continue F11=Remove F12=Previous			
F20=Peripherals F21=Text F23=Messages			
1-1 SA MW KS CL IM DM II EDN400A KB PKH317S1			

This screen displays any messages for the selected model.

For more details on the fields, see the Installation Detail Maintenance section.



Select **F12=Previous** to return to the Equipment Detail Enquiry Screen.

Division Code Enquiry



36/WOE

Use this option to enquire on the divisions for a model family.

Division Enquiry Selection Screen



Select the Division Code (Enquiries) option to display the Division Enquiry Selection Screen.

Fields:

Division Code

Enter the division you want to enquire on.



Press **Enter** to display the Division Enquiry Screen.

Division Enquiry Screen



To display this screen, enter an existing division and press **Enter** on the Division Enquiry Selection Screen.

SS552	Z1 - Demonstration Company CENTRAL BRANCH	USER GBJBATD0	4/12/97 10:39:39
Division Enquiry			
Division code..... D1			
Description..... HiFi and Video			
Parts price list.....		Labour price list.....	
Estimate / Quotation required.....		(0=No 3=Estimate 4=Quote)	
Serial number mandatory at job creation....		1 (0/1)	
Accessory list code.....		(0/1)	
Certification required.....		(0/1)	
% tolerance for estimates on customer stock		Value at this level (0/1) 0	
		.00	
% tolerance for estimates on own stock....		Value at this level (0/1) 0	
		.00	
Estimate creation fee.....		Value at this level (0/1) 0	
		.00	
Fixed price charge.....		Value at this level (0/1) 0	
		.00	
Warranty months.....		Value at this level (0/1) 0	
Warranty Claims		Value at this level (0/1) 0	
F3=Exit F12=Previous			

The information displayed includes the following:

- Parts and labour price list.
- Whether you require a quotation or estimate.
- Whether you require a serial number when you create a job.
- Accessory list code.
- Percentage tolerance for estimates.
- Estimate creation fee.
- Fixed price charge.
- Length of warranty.
- Whether you allow warranty claims on this model.

For more details on the fields, see the Division Details Maintenance section.



Select **F3=Exit** to return to the menu.

Model Group Enquiry



37/WOE

Use this option to enquire on the model groups for a model family.

Model Group Enquiry Selection Screen



Select the Model Group (Enquiries) option to display the Model Group Enquiry Selection Screen.

Fields:

Division Code

Enter the division you want to enquire on.

Model Group

Enter the model group you want to enquire on.



Enter an existing division and model group to display the Model Group Enquiry screen.

Model Group Enquiry Screen



To display this screen, on the Model Group Enquiry Selection Screen, enter a division and model group.

SS553	Z1 - Demonstration Company CENTRAL BRANCH	USER GBJBATD0	4/12/97 10:41:31
Model Group Enquiry			
Division code..... D1 HiFi and Video			
Model Group..... 001 TV and Video			
Parts price list..... GBP		Labour price list..... PL1	
Estimate / Quotation required.....		0 (0=No 3=Estimate 4=Quote)	
Serial number mandatory at job creation....		0 (0/1)	
Accessory list code.....		0 (0/1)	
Certification required.....		0 (0/1)	
% tolerance for estimates on customer stock		Value at this level (0/1) 0	
		.00	
% tolerance for estimates on own stock....		Value at this level (0/1) 0	
		.00	
Estimate creation fee.....		Value at this level (0/1) 0	
		.00	
Fixed price charge.....		Value at this level (0/1) 0	
Warranty months.....		Value at this level (0/1) 0	
Warranty Claims		Value at this level (0/1)	
F3=Exit F12=Previous F14=Condition Enquiry			

The information displayed includes the following:

- Parts price list.
- Whether you require a quotation or estimate.
- Accessory list code.
- Percentage tolerance for estimates.
- Estimate creation fee.
- Fixed price charge.
- Length of warranty.
- Whether you allow warranty claims on this model.

For more details on the fields, see the Model Group Maintenance section.

Functions:

F14

Condition Enquiry. Use this function to display the Condition/Symptom Code Enquiry Screen for this division and model group.



Select **F3=Exit** to return to the menu.

Model Sub-Group Enquiry



38/WOE

Use this option to enquire on the model sub-groups for a model family.

Model Sub-Group Enquiry Selection Screen



Select the Model Sub-Group (Enquiries) option to display the Model Sub-Group Enquiry Selection Screen.

Fields:

Division Code

Enter the division you want to enquire on.

Model Group

Enter the model group you want to enquire on.

Model Sub-Group

Enter the model sub-group you want to enquire on.



Enter a division, model group and model sub-group, and press **Enter** to display the Model Sub-Group Enquiry screen.

Model Sub-Group Enquiry Screen

-  To display the Model Sub-Group Enquiry screen, on the Model Sub-Group Selection Screen, enter a division, model group and model sub-group .

SS527	Z1 - Demonstration Company CENTRAL BRANCH	USER GBJBATD0	4/12/97 10:45:16
Model Sub-Group Enquiry			
Division.....	D1	HiFi and Video	
Model group.....	001	TV and Video	
Model sub-group.....	101	TV's	
Parts price list.....		Labour price list....	
Estimate / Quotation required.....	0		
Serial number mandatory at job creation....	0		
Accessory list code.....			
Certification required.....	0		
% tolerance for estimates on customer stock	Value at this level (0/1)	0	
		.00	
% tolerance for estimates on own stock....	Value at this level (0/1)	0	
		.00	
Estimate creation fee.....	Value at this level (0/1)	1	
		23.00	
Fixed price charge.....	Value at this level (0/1)	1	
Warranty months.....	Value at this level (0/1)	0	
Warranty Claims	Value at this level (0/1)		
F3=Exit F12=Previous			

The information displayed includes the following:

- Parts price list.
- Whether you require a quotation or estimate.
- Accessory list code.
- Percentage tolerance for estimates.
- Estimate creation fee.
- Fixed price charge.
- Length of warranty.
- Whether you allow warranty claims on this model.

For more details on the fields, see the Model Sub-Group Maintenance section.

-  Select **F3=Exit** to return to the menu.

Volume Segment Enquiry



39/WOE

Use this option to enquire on the usage volume, and the basis for repeat call calculations, for equipment at model level.

Equipment usage volume influences both the response time for calls and the calculation to determine whether a subsequent call is a repeat call.

Volume Segment Enquiry Screen

-  Select the Volume Segment (Enquiries) option and enter an existing code to display the Volume Segment Enquiry Screen.

SS556	Demonstration Company	USER BRERETM	9/04/94
	CENTRAL BRANCH		11:58:49
Volume Segment Enquiry			
Volume segment..... 30			
Description.....	High Volume Equipment		
Minimum copy volume per month.....	1000		
Maximum copy volume per month.....	12000		
Average copy volume per month.....	14000		
Volume band width.....	5000		
Volume between calls.....			
No. of days between calls.....	30		
Both tim/vol. used in repeat calc....	0		
F3=Exit F12=Previous			

The information displayed on this screen includes:

- Description of the volume segment.
- Minimum, maximum and average copies per month.
- Volume band width.
- Volume and number of days between calls.
- Whether you use time or volume, or both, in repeat call calculation.

For more details on the fields, see the Volume Segment Maintenance section.

-  Select **F3=Exit** to return to the menu.

Accessory Code Enquiry



41/WOE

Use this option to display the defined lists of standard accessories.

You can specify which accessory list a model uses. When you book that model into the workshop, Workshop Management looks at the accessory list, and if it identifies any item on the list as Supply Required, warns you that you should not process the job any further until you receive the accessory.

Accessories Code Enquiry Details Screen



To display this screen, select Accessory Code (Enquiries), enter an accessory list and press **Enter**.

W0592	Z1 - Demonstration Company	USER GBJBATD0	4/12/97
	CENTRAL BRANCH		10:49:36
Accessories Code Enquiry			
Accessory Code..... 001		Accessories for Colour TV	
Accessory		Supp Reqd	Qty
AERIAL	External Aerial	1	2
LEADS	Power Leads	1	2
MANUAL	Instruction Manual	1	4
PLUG	Plug	1	1
F3=Exit F12=Previous			

The information displayed includes:

- Accessory list name and description.
- Accessories.
- Whether you require supply of the item.
- Number of the accessories required.

For more details on the fields, see the Accessory Code Maintenance section.



To save the information and return to the selection screen, select **F8=Update**.

SOP Transfer To Workshop



50/WOE

This option stores the details of equipment sold through SOP and delivered to customers as Workshop Management-installed equipment. You can hold and issue machines sold, from an inventory stockroom, or a warehouse.

The option also generates an installation job, with the default installation job category, if you require an engineer for the machine's installation.

Description

This is a batch job, which you run on demand. It selects equipment despatched in SOP, if the sales order item number matches a Workshop Management model file record containing that item number. The job writes details of the model, serial number, delivery date and so on to the Workshop Management installed equipment file for the delivery address on the SOP order.

If the customer additional service details for the site do not exist, the Workshop Management writes a record from the SOP order data and the site's additional sales details record, which includes a field to define the relevant workshop branch.



Note: For full details of the SOP processing involved in the sale of the equipment see the SOP product information.

Implications

The transfer process does not cover the configuration of peripheral devices to the prime machine.

You must manually link the peripherals to the prime machine after the engineer has completed the installation. The engineer can then confirm which peripherals belong to which machine.

Make sure that the Codes/Parameter File, parameter type STAT, has a record X SOP Sale: SS Record Required. The equipment installation record, created by the SOP sale, displays X in the Equipment Status field. You can leave this value unchanged, or amend it when you complete the installation after the SOP transfer.

The test data includes a job category record, for the default installation job. You must set this up correctly for live running, to ensure the installation job includes the job category and fault codes (INS, Installation,4,2,1,1,*blank). You should set up a record INS, Installation: SOP machine, in the Codes/Parameter File, for parameter type FLTC.



Select SOP Transfer to Workshop to run the batch job.