
NETWORK DOCUMENTATION

MikroTik

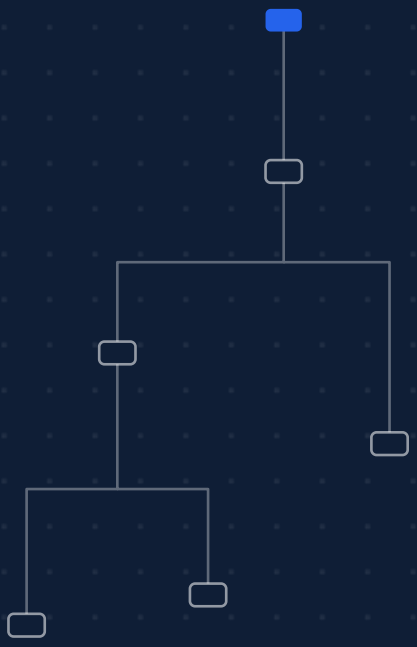

PREPARED BY

Northpoint Networks (fictional)

support@northpoint-networks.example

+1 (555) 010-0100

www.northpoint-networks.example

48 Sample Street, Suite 200, Springfield

DOCUMENT

6af3a953535f038050e3c8fd

ref. 636d6a31-f638-49a7-a28c-4ffcc4d4c6a8

PREPARED FOR

Ridgeline Supply Co. (fictional)

Demo Branch (MikroTik)

MikroTik network documentation · Branch office

CLIENT	SITE
Ridgeline Supply Co. (fictional)	Demo Branch (MikroTik) Branch office
LAST SCAN	**ISSUED ON**
Nov 10, 2026, 2:15 PM MST	Nov 10, 2026

6	8	2	40
DEVICES	NETWORKS / VLANS	ACCESS POINTS	CLIENTS

CLIENT CONTACT

Avery Cole, Operations

it@ridgeline-supply.example

+1 (555) 010-0142

1200 Example Way, Springfield

Contents

Infrastructure summary 3
Internet / ISP 3
Network topology 4
MikroTik inventory 5
- Gateway 5
- Switches 5
- Ports / VLANs / PoE 5
- Bridge VLAN table 7
- Discovered neighbors (LLDP / CDP / MNDP) 7

Access points 8
Wi-Fi / SSID 8
Networks / VLAN 8
DHCP / IP addressing 8
Network clients 8
Health status 10
- Devices 10
- WAN link 10

VPN 10
- VPN servers 10
- WireGuard peers 10
- Site-to-site tunnels 10

Firewall 10
- Filter rules 10
- NAT rules 11

Security findings 11
- Checks performed 13

Device identification 13

DOCUMENT INFORMATION

Client	**Ridgeline Supply Co. (fictional)**
Site	**Demo Branch (MikroTik)**
Platform	**MikroTik · RB5009UPr+S+**
Source	**Bundled demonstration dataset**
Captured	**Nov 10, 2026, 2:15 PM MST**
Issued	**Nov 10, 2026**
Template	**Technical · Clean Light**
Data sources	**128 read · 19 not available**
Client history	**30 days**
Document ID	**6af3a953535f038050e3c8fd**

LEGEND

- Online · Connected · Active
- Disabled · Inactive · Recently seen
- Offline · Disconnected
- Discovered through a neighbor, not managed
- — Blank cell: not reported by the source

INTRODUCTION

Network documentation for the branch office, generated from the RouterOS configuration of **BR-EDGE**, **BR-CORE** and **BR-POE**.

- Gateway, switching and CAPsMAN wireless
- Six VLANs with DHCP on the gateway
- WireGuard remote access and a site-to-site tunnel to HQ

ADDITIONAL NOTES

The shop switch (**SHOP-SG350**) is not managed from RouterOS. It is listed from LLDP data only, and clients behind it appear under *Undetermined relationship*.

`ether8` on BR-EDGE is the LTE failover link.

Infrastructure summary

DEVICES
6

NETWORKS / VLANS
8

ACCESS POINTS
2

SSID
2

SWITCHES
3

CLIENTS
40

Internet / ISP

LINK
WAN (ether1)

PUBLIC IP
203.0.113.45

CONNECTION TYPE
DHCP

ISP
Spectrum Business

STATE
• Connected

CAPTURED ON
Nov 10, 2026, 2:15 PM MST

AVERAGE LATENCY
11.8 ms

PACKET LOSS
0%

MAX LATENCY
19.4 ms

LINK RATE
2500 Mbit/s

WAN INTERFACE
ether1

DEFAULT GATEWAY
203.0.113.1


LATENCY PROBE
1.1.1.1 (Netwatch)

WAN links

Link	Role	Public IP	Type	ISP	State	Link rate
WAN (ether1)	Primary	203.0.113.45	DHCP	Spectrum Business	• Connected	2500 Mbit/s
WAN2 (ether8)	Failover (distance 2)	198.51.100.77	DHCP	Verizon LTE failover	• Connected	1 Gbit/s

Security findings 0 High 6 Medium 8 Low 1 Info details on page 11

Network topology

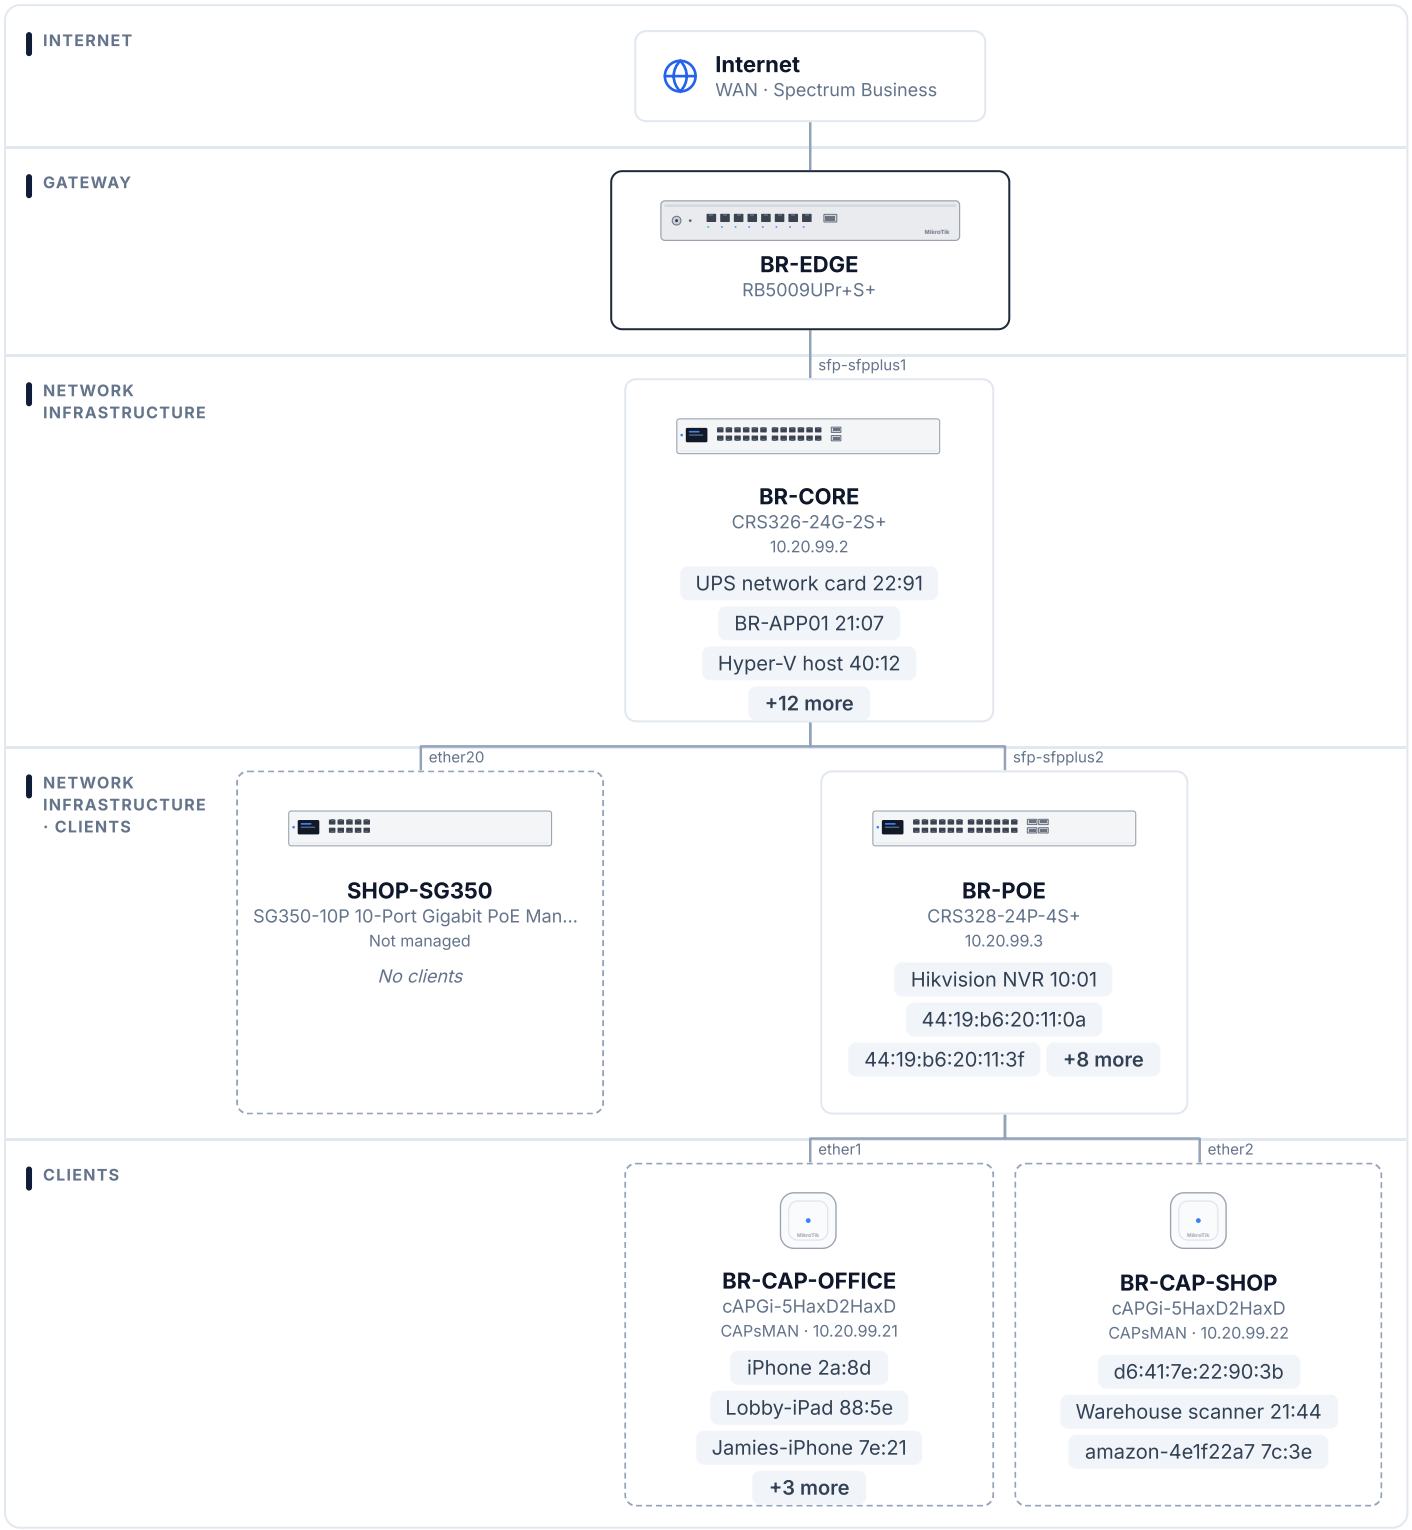

UNDETERMINED RELATIONSHIP

SHOP-PC01 3a:10 Wired client	**ESP_3A1F2C 1f:2c** Wired client	**Shop thermostat 0e:11** Wired client

Name	Model	IP	MAC	Firmware	State
BR-EDGE	RB5009UPr+S+	10.20.99.1	48:a9:8a:51:2c:11	7.16.2	• Online
BR-CORE	CRS326-24G-2S+	10.20.99.2	d4:01:c3:7a:30:00	7.16.2	• Online
BR-POE	CRS328-24P-4S+	10.20.99.3	4c:5e:0c:9d:12:00	7.16.2	• Online
SHOP-SG350	SG350-10P 10-Port Giga…	10.20.99.40	f4:cf:e2:6a:91:0c		○ Discovered
BR-CAP-OFFICE	cAPGi-5HaxD2HaxD	10.20.99.21	18:fd:74:20:a1:00	7.16.2	• Online
BR-CAP-SHOP	cAPGi-5HaxD2HaxD	10.20.99.22	18:fd:74:20:b7:40	7.16.2	• Online

Equipment images (manufacturer product photos or generated illustrations) are shown for visual representation purposes and may differ slightly from the actual appearance of the devices.

MikroTik inventory

Gateway

NAME	MODEL	SERIAL
BR-EDGE	RB5009UPr+S+	HFE09KRT3MQ
WAN IP	**IP**	**MAC**
203.0.113.45	10.20.99.1	48:a9:8a:51:2c:11
ROUTEROS	**UPTIME**	**TEMP.**
7.16.2	23d 7h	41 °C

Switches

Name	Model	IP	Serial	RouterOS	Ports	Uplink	State
BR-CORE	CRS326-24G-2S+	10.20.99.2	HE9089P1QTA	7.16.2	26	sfp-sfpplus1 ↔ sfp-sfpplus1 · 10 Gbit/s	• Online
BR-POE	CRS328-24P-4S+	10.20.99.3	HE20951KZ7C	7.16.2	28	sfp-sfpplus2 ↔ sfp-sfpplus1 · 10 Gbit/s	• Online
SHOP-SG350	SG350-10P 10-Port G…	10.20.99.40				ether20 ↔ gi10 · 1 Gbit/s	○ Discovered

Ports / VLANs / PoE

BR-EDGE - port	Link	Speed	PVID	Untagged	Tagged VLANs	PoE	Connected to	Comment
ether1	UP	2500 Mbit/s				Inactive		WAN - Spectrum Business
ether2	UP	1 Gbit/s	99	99		Active 3.4 W	1 MAC	pi-monitor
ether3	UP	1 Gbit/s	10	10		Inactive	1 MAC	NAS
ether4	DOWN		1			Inactive		
ether5	DOWN		1			Inactive		
ether6	DOWN		1			Inactive		
ether7	DOWN		1			Inactive		
ether8	UP	1 Gbit/s				Inactive		WAN2 - Verizon LTE failo…
sfp-sfpplus1	UP	10 Gbit/s	1		10,20,30,40,50,99		BR-CORE (sfp-sfpplus1)	Uplink BR-CORE

BR-CORE - port	Link	Speed	PVID	Untagged	Tagged VLANs	PoE	Connected to	Comment
ether1	UP	1 Gbit/s	10	10			1 MAC	
ether2	UP	1 Gbit/s	10	10			1 MAC	
ether3	UP	1 Gbit/s	10	10			1 MAC	
ether4	UP	1 Gbit/s	10	10			1 MAC	
ether5	UP	1 Gbit/s	10	10			1 MAC	
ether6	UP	1 Gbit/s	10	10			1 MAC	
ether7	DOWN		10	10				
ether8	DOWN		10	10				
ether9	DOWN		10	10				
ether10	UP	1 Gbit/s	10	10			1 MAC	
ether11	UP	1 Gbit/s	10	10			1 MAC	
ether12	UP	1 Gbit/s	10	10			1 MAC	
ether13	DOWN		10	10				
ether14	DOWN		10	10				
ether15	DOWN		10	10				
ether16	DOWN		10	10				
ether17	DOWN		10	10				
ether18	UP	1 Gbit/s	10	10			2 MACs	Hyper-V host
ether19	DOWN		10	10				
ether20	UP	1 Gbit/s	1		10,99		SHOP-SG350 (gi10)	Shop SG350 trunk
ether21	DOWN		10	10				
ether22	UP	100 Mbit/s	99	99			1 MAC	UPS NMC
ether23	DOWN		10	10				
ether24	UP	1 Gbit/s	10	10			3 MACs	Shipping desk switch
sfp-sfpplus1	UP	10 Gbit/s	1		10,20,30,40,50,99		BR-EDGE (sfp-sfpplus1)	Uplink BR-EDGE
sfp-sfpplus2	UP	10 Gbit/s	1		10,20,30,40,50,99		BR-POE (sfp-sfpplus1)	BR-POE

BR-POE - port	Link	Speed	PVID	Untagged	Tagged VLANs	PoE	Connected to	Comment
ether1	UP	1 Gbit/s	99	99	40,50	Active 12.6 W	BR-CAP-OFFICE (ether1)	cAP office
ether2	UP	1 Gbit/s	99	99	40,50	Active 11.9 W	BR-CAP-SHOP (ether1)	cAP shop
ether3	UP	1 Gbit/s	10	10	20	Active 4.1 W	SIP-T54W	
ether4	UP	1 Gbit/s	10	10	20	Active 3.9 W	SIP-T54W	
ether5	UP	1 Gbit/s	10	10	20	Active 4.3 W	SIP-T54W	
ether6	UP	1 Gbit/s	10	10	20	Active 4 W	SIP-T54W	
ether7	UP	1 Gbit/s	10	10	20	Active 3.6 W	SIP-T46U	
ether8	UP	1 Gbit/s	10	10	20	Active 3.7 W	SIP-T46U	
ether9	UP	100 Mbit/s	30	30		Active 5.8 W	1 MAC	
ether10	UP	100 Mbit/s	30	30		Active 6.1 W	1 MAC	
ether11	UP	100 Mbit/s	30	30		Active 7.4 W	1 MAC	
ether12	UP	100 Mbit/s	30	30		Active 6.9 W	1 MAC	
ether13	DOWN		30	30		Inactive		
ether14	DOWN		30	30		Inactive		
ether15	UP	1 Gbit/s	30	30		Inactive	1 MAC	NVR
ether16	DOWN					Inactive		
ether17	DOWN					Inactive		
ether18	DOWN					Inactive		
ether19	DOWN					Inactive		
ether20	DOWN					Inactive		
ether21	DOWN					Inactive		

BR-POE - port	Link	Speed	PVID	Untagged	Tagged VLANs	PoE	Connected to	Comment
ether22	DOWN					Inactive		
ether23	DOWN					Inactive		
ether24	DOWN					Inactive		
sfp-sfpplus1	UP	10 Gbit/s	1		10,20,30,40,50,99		BR-CORE (sfp-sfpplus2)	Uplink BR-CORE
sfp-sfpplus2	DOWN							
sfp-sfpplus3	DOWN							
sfp-sfpplus4	DOWN							

Bridge VLAN table

Device	Bridge	VLANs	Tagged VLANs	Untagged
BR-EDGE	bridge	10	bridge, sfp-sfpplus1	ether3
BR-EDGE	bridge	20	bridge, sfp-sfpplus1	
BR-EDGE	bridge	30	bridge, sfp-sfpplus1	
BR-EDGE	bridge	40	bridge, sfp-sfpplus1	
BR-EDGE	bridge	50	bridge, sfp-sfpplus1	
BR-EDGE	bridge	99	bridge, sfp-sfpplus1	ether2
BR-CORE	bridge	10	sfp-sfpplus1, sfp-sfpplus2, ether20	ether1, ether2, ether3, ether4, ether5, ether6, ...
BR-CORE	bridge	20,30,40,50	sfp-sfpplus1, sfp-sfpplus2	
BR-CORE	bridge	99	bridge, sfp-sfpplus1, sfp-sfpplus2, ether20	ether22
BR-POE	bridge	20	sfp-sfpplus1, ether3, ether4, ether5, ether6, ether7, ether8	
BR-POE	bridge	30	sfp-sfpplus1	ether9, ether10, ether11, ether12, ether13, ethe...
BR-POE	bridge	40,50	sfp-sfpplus1, ether1, ether2	
BR-POE	bridge	10	sfp-sfpplus1	ether3, ether4, ether5, ether6, ether7, ether8
BR-POE	bridge	99	bridge, sfp-sfpplus1	ether1, ether2

Discovered neighbors (LLDP / CDP / MNDP)

Seen by	{switch} - port	Identity	Address	MAC	Platform / description	Protocol
BR-EDGE	sfp-sfpplus1	BR-CORE	`10.20.99.2`	`d4:01:c3:7a:30:18`	MikroTik CRS326-24G-2S+ 7.16.2 (stable)	MNDP, LLDP
BR-CORE	sfp-sfpplus1	BR-EDGE	`10.20.99.1`	`48:a9:8a:51:2c:18`	MikroTik RB5009UPr+S+ 7.16.2 (stable)	MNDP, LLDP
BR-CORE	sfp-sfpplus2	BR-POE	`10.20.99.3`	`4c:5e:0c:9d:12:18`	MikroTik CRS328-24P-4S+ 7.16.2 (stable)	MNDP, LLDP
BR-CORE	ether20	SHOP-SG350	`10.20.99.40`	`f4:cf:e2:6a:91:0c`	SG350-10P 10-Port Gigabit PoE Manage...	LLDP
BR-POE	sfp-sfpplus1	BR-CORE	`10.20.99.2`	`d4:01:c3:7a:30:19`	MikroTik CRS326-24G-2S+ 7.16.2 (stable)	MNDP, LLDP
BR-POE	ether1	BR-CAP-OFFICE	`10.20.99.21`	`18:fd:74:20:a1:00`	MikroTik cAPGi-5HaxD2HaxD 7.16.2 (sta...	MNDP, LLDP
BR-POE	ether2	BR-CAP-SHOP	`10.20.99.22`	`18:fd:74:20:b7:40`	MikroTik cAPGi-5HaxD2HaxD 7.16.2 (sta...	MNDP, LLDP
BR-POE	ether3	SIP-T54W	`10.20.20.101`	`80:5e:c0:1a:2b:31`	Yealink SIP-T54W 96.86.0.70	LLDP
BR-POE	ether4	SIP-T54W	`10.20.20.102`	`80:5e:c0:1a:2b:5c`	Yealink SIP-T54W 96.86.0.70	LLDP
BR-POE	ether5	SIP-T54W	`10.20.20.103`	`44:db:d2:07:91:e2`	Yealink SIP-T54W 96.86.0.70	LLDP
BR-POE	ether6	SIP-T54W	`10.20.20.104`	`44:db:d2:07:93:0a`	Yealink SIP-T54W 96.86.0.70	LLDP
BR-POE	ether7	SIP-T46U	`10.20.20.105`	`24:9a:d8:90:41:7b`	Yealink SIP-T46U 96.86.0.70	LLDP
BR-POE	ether8	SIP-T46U	`10.20.20.106`	`24:9a:d8:90:42:c4`	Yealink SIP-T46U 96.86.0.70	LLDP

Access points

Name	Model	IP	Radios	Clients	State
BR-CAP-OFFICE	cAPGi-5HaxD2H...	10.20.99.21	2.4 GHz ch 6 · 40 MHz · 802.11ax / 5 GHz ch 36 · 80 MHz · 802.11ax	6	• Online
BR-CAP-SHOP	cAPGi-5HaxD2H...	10.20.99.22	2.4 GHz ch 11 · 20 MHz · 802.11ax / 5 GHz ch 149 · 80 MHz · 802.11ax	3	• Online

Wi-Fi / SSID

SSID	Network	Security	Bands	State	Guest
Branch-Staff	Staff Wi-Fi	WPA2_WPA3_PERSONAL	2.4 GHz / 5 GHz	• Active	
Branch-Guest	Guest Wi-Fi	WPA2_PERSONAL	2.4 GHz / 5 GHz	• Active	

Networks / VLAN

Network	VLAN	Subnet	Gateway	Interface	DHCP server	State
Office	10	10.20.10.0/24	10.20.10.1	vlan10-office	dhcp-office	• Active
Voice	20	10.20.20.0/24	10.20.20.1	vlan20-voice	dhcp-voice	• Active
Cameras	30	10.20.30.0/24	10.20.30.1	vlan30-cameras	dhcp-cameras	• Active
Guest Wi-Fi	40	10.20.40.0/23	10.20.40.1	vlan40-guest	dhcp-guest	• Active
Staff Wi-Fi	50	10.20.50.0/24	10.20.50.1	vlan50-staff	dhcp-staff	• Active
Management	99	10.20.99.0/24	10.20.99.1	vlan99-mgmt	dhcp-mgmt	• Active
WireGuard remote access		10.255.10.0/24	10.255.10.1	wg-remote		• Active
WireGuard tunnel to HQ		10.255.0.0/30	10.255.0.2	wg-hq		• Active

DHCP / IP addressing

Network	DHCP	Range	DNS	Lease
Office	SERVER	10.20.10.100 - 10.20.10.250	10.20.10.5, 1.1.1.1	86400 s
Voice	SERVER	10.20.20.100 - 10.20.20.200	10.20.20.1	86400 s
Cameras	SERVER	10.20.30.20 - 10.20.30.99	Automatic	259200 s
Guest Wi-Fi	SERVER	10.20.40.10 - 10.20.41.250	1.1.1.1, 9.9.9.9	3600 s
Staff Wi-Fi	SERVER	10.20.50.100 - 10.20.50.250	1.1.1.1, 9.9.9.9	28800 s
Management	SERVER	10.20.99.50 - 10.20.99.99	10.20.99.1	86400 s

Network clients

Host	IP	MAC	VL...	Connection	Uplink	Presence
Hikvision NVR	10.20.30.10	c0:56:e3:5a:10:01	30	Wired	BR-POE · ether15	• Connected
44:19:b6:20:11:0a	10.20.30.21	44:19:b6:20:11:0a	30	Wired	BR-POE · ether9	• Connected
44:19:b6:20:11:3f	10.20.30.22	44:19:b6:20:11:3f	30	Wired	BR-POE · ether10	• Connected
axis-accc8e7d1e20	10.20.30.23	ac:cc:8e:7d:1e:20	30	Wired	BR-POE · ether11	• Connected
Loading dock camera	10.20.30.24	00:40:8c:e2:15:6b	30	Wired	BR-POE · ether12	• Connected
iPhone	10.20.40.10	72:9b:01:4c:2a:8d	40	Wireless	BR-CAP-OFFICE · Branch-Guest	• Connected
d6:41:7e:22:90:3b	10.20.40.11	d6:41:7e:22:90:3b	40	Wireless	BR-CAP-SHOP · Branch-Guest	• Connected
Lobby-iPad	10.20.40.12	3c:07:54:1a:88:5e	40	Wireless	BR-CAP-OFFICE · Branch-Guest	• Connected

Host	IP	MAC	VL...	Connection	Uplink	Presence
pi-monitor	10.20.99.10	dc:a6:32:7e:11:90	99	Wired	BR-EDGE · ether2	Connected
UPS network card	10.20.99.30	00:c0:b7:4d:22:91	99	Wired	BR-CORE · ether22	Connected
BR-NAS01	10.20.10.5	00:11:32:9a:4c:10	10	Wired	BR-EDGE · ether3	Connected
BR-APP01	10.20.10.6	00:15:5d:0a:21:07	10	Wired	BR-CORE · ether18	Connected
Hyper-V host	10.20.10.7	b4:2e:99:6c:40:12	10	Wired	BR-CORE · ether18	Connected
HP LaserJet - front office	10.20.10.20	48:ea:62:8f:2d:41	10	Wired	BR-CORE · ether10	Connected
BRN3C2AF4A1B2C3	10.20.10.21	3c:2a:f4:a1:b2:c3	10	Wired	BR-CORE · ether11	Connected
Copier	10.20.10.22	8c:52:19:77:01:ab	10	Wired	BR-CORE · ether12	Connected
Front desk PC	10.20.10.101	c0:47:0e:3b:91:a2	10	Wired	BR-CORE · ether1	Connected
BR-PC-0413	10.20.10.102	cc:96:e5:12:7d:44	10	Wired	BR-CORE · ether2	Connected
DESKTOP-7Q2M4KX	10.20.10.103	b8:cb:29:5e:20:19	10	Wired	BR-CORE · ether3	Connected
BR-LT-0201	10.20.10.104	00:e0:4c:68:12:f3	10	Wired	BR-CORE · ether4	Connected
Payroll workstation	10.20.10.105	98:fa:9b:41:0c:7e	10	Wired	BR-CORE · ether5	Connected
BR-PC-0417	10.20.10.106	e4:b9:7a:22:5d:01	10	Wired	BR-CORE · ether6	Connected
SCAN-STATION	10.20.10.120	8c:16:45:0b:3e:9a	10	Wired	BR-CORE · ether24	Connected
Shipping label printer	10.20.10.121	00:07:4d:5a:11:02	10	Wired	BR-CORE · ether24	Connected
2c:2d:c6:10:44:5a	10.20.10.122	2c:2d:c6:10:44:5a	10	Wired	BR-CORE · ether24	Connected
SHOP-PC01	10.20.10.130	8c:16:45:77:3a:10	10	Wired		Connected
ESP_3A1F2C	10.20.10.131	24:0a:c4:3a:1f:2c	10	Wired		Connected
Shop thermostat	10.20.10.132	44:61:32:9b:0e:11	10	Wired		Connected
Jamies-iPhone	10.20.50.101	5a:3c:91:0d:7e:21	50	Wireless	BR-CAP-OFFICE · Branch-Staff	Connected
Galaxy-S24	10.20.50.102	9e:12:44:70:a5:0b	50	Wireless	BR-CAP-OFFICE · Branch-Staff	Connected
BR-MBP-07	10.20.50.103	f0:18:98:4a:61:7c	50	Wireless	BR-CAP-OFFICE · Branch-Staff	Connected
BR-LT-0230	10.20.50.104	8c:f8:c5:31:9d:02	50	Wireless	BR-CAP-OFFICE · Branch-Staff	Connected
Warehouse scanner	10.20.50.105	00:07:4d:8e:21:44	50	Wireless	BR-CAP-SHOP · Branch-Staff	Connected
amazon-4e1f22a7	10.20.50.106	0c:dc:91:5b:7c:3e	50	Wireless	BR-CAP-SHOP · Branch-Staff	Connected
SIP-T54W	10.20.20.101	80:5e:c0:1a:2b:31	20	Wired	BR-POE · ether3	Connected
SIP-T54W	10.20.20.102	80:5e:c0:1a:2b:5c	20	Wired	BR-POE · ether4	Connected
SIP-T54W	10.20.20.103	44:db:d2:07:91:e2	20	Wired	BR-POE · ether5	Connected
SIP-T54W	10.20.20.104	44:db:d2:07:93:0a	20	Wired	BR-POE · ether6	Connected
SIP-T46U	10.20.20.105	24:9a:d8:90:41:7b	20	Wired	BR-POE · ether7	Connected
SIP-T46U	10.20.20.106	24:9a:d8:90:42:c4	20	Wired	BR-POE · ether8	Connected
Contractor laptop	10.20.10.140	50:eb:71:2a:0d:19	10	Wired		Recently seen
2c:2d:c6:99:01:23	10.20.10.141	2c:2d:c6:99:01:23	10	Wired		Recently seen
Board-room iPad	10.20.50.140	6e:1d:2c:88:41:f0	50	Wired		Recently seen
Loaner phone	10.20.50.141	2a:91:5f:03:7c:66	50	Wired		Recently seen

Health status

Devices

Name	Uptime	CPU	Memory	Temp.	RouterOS	Captured on
BR-EDGE	23d 7h	7%	32.6%	41 °C	7.16.2	Nov 10, 2026, 2:15 PM MST
BR-CORE	67d 11h	3%	19.5%	38 °C	7.16.2	Nov 10, 2026, 2:15 PM MST
BR-POE	67d 11h	5%	20.7%	47 °C	7.16.2	Nov 10, 2026, 2:15 PM MST
BR-CAP-OFFICE					7.16.2	Managed by CAPsMAN on BR-EDGE
BR-CAP-SHOP					7.16.2	Managed by CAPsMAN on BR-EDGE

WAN link

Name	Probe target	Average latency	Max latency	Packet loss	Link rate
WAN (ether1)	`1.1.1.1`	11.8 ms	19.4 ms	0%	2500 Mbit/s
WAN2 (ether8)					1 Gbit/s

VPN

VPN servers

Name	Type	State	Origin	Client
wg-remote	WIREGUARD	• Active	USER DEFINED	No
wg-hq	WIREGUARD	• Active	USER DEFINED	No

WireGuard peers

Interface	Peer	Allowed addresses	Endpoint	Last handshake	State
wg-remote	**it-admin-laptop**	`10.255.10.2/32`		1m12s ago	• Active
wg-remote	**on-call-tablet**	`10.255.10.3/32`		2d3h ago	• Active
wg-remote	**manager-phone**	`10.255.10.4/32`		3h41m ago	• Active
wg-remote	**vendor-support**	`10.255.10.20/32`		never	• Disabled
wg-hq	**HQ**	`10.0.0.0/16, 10.255.0.1/32`	`198.51.100.20:13231`	45s ago	• Active

Site-to-site tunnels

Name	Type	Remote	State
HQ	WIREGUARD	`198.51.100.20:13231`	• Active

Firewall

Filter rules

State	#	Chain	Action	Match (protocol source → destination :port / interfaces · state)	Log	Comment
• Active	`0`	input	accept	`any any → any` established, related, untracked		defconf: accept established,related,untracked
• Active	`1`	input	drop	`any any → any` invalid		defconf: drop invalid
• Active	`2`	input	accept	`icmp any → any`		defconf: accept ICMP
• Active	`3`	input	accept	`any any → 127.0.0.1`		defconf: accept to local loopback (for CAPsMAN)

State	#	Chain	Action	Match (protocol source → destination :port / interfaces · state)	Log	Comment
Active	4	input	accept	udp any → any :13231,13232 in @WAN		WireGuard (remote access + HQ)
Active	5	input	accept	tcp any → any :22,443,8291 in wg-remote		Admin from WireGuard
Active	6	input	accept	any any → any in vlan99-mgmt		Management VLAN to router
Active	7	input	drop	any any → any in @!LAN		defconf: drop all not coming from LAN
Active	8	forward	accept	any any → any		defconf: accept in ipsec policy
Active	9	forward	accept	any any → any		defconf: accept out ipsec policy
Active	10	forward	fasttrack	any any → any established, related		defconf: fasttrack
Active	11	forward	accept	any any → any established, related, untracked		defconf: accept established,related, untracked
Active	12	forward	drop	any any → any invalid		defconf: drop invalid
Active	13	forward	drop	any any → any in @WAN · new; nat !dstnat		defconf: drop all from WAN not DSTNATed
Active	14	forward	drop	any any → any in vlan40-guest → out @!WAN		Guest Wi-Fi: internet only
Active	15	forward	accept	tcp 10.20.30.10 → any :443 out @WAN		NVR cloud updates
Active	16	forward	drop	any 10.20.30.0/24 → any out @WAN	Yes	Cameras: no internet
Active	17	forward	accept	udp any → @sip-provider :5060,10000-20000 in vlan20-voice		Voice to SIP trunk
Active	18	forward	drop	any any → any in vlan50-staff → out vlan99-mgmt		Staff Wi-Fi cannot reach management
Active	19	forward	accept	any any → 10.20.10.0/24 in wg-hq		HQ to office VLAN
Disabled	20	forward	accept	tcp 203.0.113.200 → 10.20.10.7 :3389	Yes	TEMP vendor RDP (disabled)

NAT rules

State	#	Chain	Action	Protocol	In	Out	Dst. port	To address	To port	Comment
Active	0	srcnat	masquerade			@WAN				defconf: masquerade
Active	1	dstnat	dst-nat	tcp	@WAN		8443	10.20.30.10	443	NVR remote viewing
Disabled	2	dstnat	dst-nat	tcp	@WAN		3389	10.20.10.7	3389	Old RDP forward (disabled)

Security findings

High	Medium	Low	Info	CHECKS EVALUATED
0	6	8	1	24

Results of automated checks of the configuration imported on Nov 10, 2026. Each finding states what was observed and is an indication to review, not a verdict: this is not a penetration test or a compliance audit, and a check without a finding does not prove the area is secure. Checks that could not be evaluated are listed as such.

Ref	Severity	Finding	Observed	Recommendation
F-01	Medium	**Services are published to the internet** Firewall	1 port forward exposes internal systems to the internet. Each exposed service is reachable by anyone who scans the public address. • NVR remote viewing: tcp 8443 to 10.20.30.10:443	Confirm each forward is still needed, limit it to known source addresses, and keep the exposed systems patched.

Ref	Severity	Finding	Observed	Recommendation
F-02	Medium	**Unencrypted management services are enabled** Management	3 devices accept management logins over protocols that send the user name and password in clear text, where anyone on the path can read them. • BR-EDGE: HTTP (WebFig) • BR-CORE: Telnet, FTP, HTTP (WebFig), API (unencrypted) • BR-POE: HTTP (WebFig), API (unencrypted)	Disable Telnet, FTP, HTTP and the unencrypted API under IP > Services, and use SSH, WinBox, HTTPS and API-SSL.
F-03	Medium	**The default "admin" account is enabled** Management	2 devices still have the factory "admin" account enabled. It is the first name tried in password-guessing attacks, and shared accounts hide who made a change. • BR-CORE • BR-POE	Create a named account for each administrator, then disable or remove "admin".
F-04	Medium	**SNMP uses the default community "public"** Management	SNMP is enabled on 1 device with the well-known community "public". Anyone who can reach the device can read its interfaces, addresses and neighbours. • BR-CORE: readable from any address	Use SNMPv3 with authentication, or at least a non-default community limited to the monitoring server's address.
F-05	Medium	**IoT and media devices share a network with computers** Segmentation	On 1 network, cameras, media players or other embedded devices sit on the same network as computers or servers. Such devices are rarely patched and can be used to reach the computers beside them. • Office: ESP_3A1F2C 1f:2c, Shop thermostat 0e:11 with 10 computers	Move embedded and media devices to their own network and allow only the traffic they need.
F-06	Medium	**RouterOS updates are available** Maintenance	1 device is running a RouterOS version older than the one its update channel offers. Updates regularly fix security flaws. • BR-EDGE: 7.16.2 to 7.18.2	Read the changelog, then schedule the updates in a maintenance window.
F-07	Low	**Wi-Fi limited to WPA2** Wi-Fi	1 active network accepts WPA2 only. A WPA2 Wi-Fi password can be attacked offline once a connection handshake is captured. • Branch-Guest	Enable WPA2/WPA3 transition mode where the client devices allow it, and use a long, unique Wi-Fi password.
F-08	Low	**Management services accept logins from any address** Management	On 2 devices, enabled management services have no "available from" address list, so only the firewall decides who can reach the login prompt. • BR-CORE: ssh, www-ssl, winbox • BR-POE: ssh, www-ssl, winbox	Set "available from" on each service to the management network or the administrators' addresses.
F-09	Low	**MAC-level management is allowed on every interface** Management	2 devices accept MAC-Telnet or MAC-WinBox logins on all interfaces. These work without an IP address, so the IP firewall does not filter them. • BR-CORE: MAC-Telnet, MAC-WinBox on all interfaces • BR-POE: MAC-Telnet, MAC-WinBox on all interfaces	Limit the MAC server and MAC-WinBox to an interface list that contains only the management network.
F-10	Low	**SSH strong crypto is off** Management	2 devices allow older SSH ciphers and key sizes that current guidance advises against. • BR-CORE • BR-POE	Set strong-crypto=yes under IP > SSH and regenerate the host key.
F-11	Low	**DHCP hands out a public DNS resolver next to the internal one** Segmentation	1 DHCP scope lists both an internal and a public resolver. Clients use either, which bypasses internal name resolution and any DNS filtering. • Office: 10.20.10.5, 1.1.1.1	List only the internal resolvers and let them forward to the internet.
F-12	Low	**Devices with randomized addresses on internal networks** Inventory	2 connected devices use a private (randomized) hardware address, which is typical of personal phones and laptops and prevents a stable inventory. • Jamies-iPhone 7e:21 (10.20.50.101) • Galaxy-S24 a5:0b (10.20.50.102)	Confirm these are authorized devices; move personal devices to the guest network.

Ref	Severity	Finding	Observed	Recommendation
F-13	Low	**Network equipment that is not managed here** Inventory	1 switch, router or access point on the network is not managed by this system, and 3 clients could not be traced to a managed port. Their configuration, firmware and port security are not covered by this document. • SHOP-SG350 (SG350-10P 10-Port Gigabit PoE Managed Switch)	Bring the equipment under management or document it separately, and confirm each device is authorized.
F-14	Low	**RouterBOARD firmware is behind RouterOS** Maintenance	1 device has boot firmware older than the installed RouterOS version provides. • BR-POE: 7.12.1 to 7.16.2	Run the RouterBOARD upgrade and reboot in a maintenance window.
F-15	Info	**Disabled firewall rules left in place** Firewall	2 user-defined rules are disabled. Disabled rules are easily re-enabled by mistake and make the rule set harder to review. • filter forward: TEMP vendor RDP (disabled) • nat dstnat: Old RDP forward (disabled)	Delete rules that are no longer needed, or note why each one is kept.

Checks performed

Area	Check	Result	Note
Firewall	**Input chain: unsolicited connections from the internet**	No finding	
Firewall	**Forward chain: new connections from the internet to the LAN**	No finding	
Firewall	**Disabled firewall rules left in place**	Finding	
Firewall	**Services published to the internet (port forwards)**	Finding	
Firewall	**UPnP (devices opening ports by themselves)**	No finding	
Firewall	**SOCKS or web proxy enabled**	No finding	
Remote access	**PPTP or L2TP remote access**	No finding	
Wi-Fi	**Wi-Fi networks without encryption**	No finding	
Wi-Fi	**Wi-Fi networks using WEP or first-generation WPA**	No finding	
Wi-Fi	**Wi-Fi networks limited to WPA2**	Finding	
Management	**Unencrypted management services (Telnet, FTP, HTTP, API)**	Finding	
Management	**Management services without a source-address limit**	Finding	
Management	**Default "admin" account**	Finding	
Management	**SNMP with the default community**	Finding	
Management	**MAC-level management (MAC-Telnet, MAC-WinBox)**	Finding	
Management	**SSH strong crypto**	Finding	
Segmentation	**IoT and media devices on the same network as computers**	Finding	
Segmentation	**Network equipment managed on a network that carries clients**	No finding	
Segmentation	**Internal and public DNS resolvers mixed in one DHCP scope**	Finding	
Inventory	**Unidentified devices on internal networks**	No finding	
Inventory	**Devices with randomized addresses on internal networks**	Finding	
Inventory	**Network equipment that is not managed here**	Finding	
Maintenance	**RouterOS updates available**	Finding	1 of 3 devices had checked for up...
Maintenance	**RouterBOARD firmware behind RouterOS**	Finding	

Device identification

DEVICES SEEN	CONNECTED NOW	RECENTLY SEEN	IDENTIFIED (HIGH / MEDIUM)	UNIDENTIFIED	RANDOMIZED MAC
44	40	4	40	1	6

Types are inferred passively from the IEEE MAC vendor registry, DHCP hostname and vendor class, LLDP/CDP/MNDP data and controller records — no scanning. The Evidence column lists the signals behind each result; treat types as an indication, not a verified inventory. Window: connected now plus devices seen in the last 30 days.

BY TYPE

Computer	11	Phone / tablet	8	IP phone	6	Camera / NVR	5
Printer / copier	4	IoT / embedded	3	Server / VM	2	Building / HVAC	1
Smart speaker / media	1	Storage (NAS)	1	Unknown	1	UPS / power	1

Device	IP / Network	Vendor	Type / OS / model	Seen on	Evidence	Confidence
Hikvision NVR c0:56:e3:5a:10:01	10.20.30.10 Cameras · VLAN 30	Hikvision Hangzhou Hikvisi...	**Camera / NVR**	BR-POE Wired · ether15	IEEE OUI vendor · Vendor Hikvision · Name “Hikvision NVR” · Hostname	High
44:19:b6:20:11:0a 44:19:b6:20:11:0a	10.20.30.21 Cameras · VLAN 30	Hikvision Hangzhou Hikvisi...	**Camera / NVR**	BR-POE Wired · ether9	IEEE OUI vendor · Vendor Hikvision	Medium
44:19:b6:20:11:3f 44:19:b6:20:11:3f	10.20.30.22 Cameras · VLAN 30	Hikvision Hangzhou Hikvisi...	**Camera / NVR**	BR-POE Wired · ether10	IEEE OUI vendor · Vendor Hikvision	Medium
axis-accc8e7d1e20 ac:cc:8e:7d:1e:20	10.20.30.23 Cameras · VLAN 30	Axis Axis Communicat...	**Camera / NVR**	BR-POE Wired · ether11	IEEE OUI vendor · Vendor Axis · Hostname “axis-accc8e7d1e20”	High
Loading dock camera 00:40:8c:e2:15:6b	10.20.30.24 Cameras · VLAN 30	Axis Axis Communicat...	**Camera / NVR**	BR-POE Wired · ether12	IEEE OUI vendor · Vendor Axis · Name “Loading dock camera” ·	High
iPhone 72:9b:01:4c:2a:8d	10.20.40.10 Guest Wi-Fi · VLAN...	Randomized MAC private address	**Phone / tablet** iOS · iPhone	BR-CAP-OFFICE Wireless · Branch-Guest	Randomized (private) MAC — vendor cannot be derived ·	Medium
d6:41:7e:22:90:3b d6:41:7e:22:90:3b	10.20.40.11 Guest Wi-Fi · VLAN...	Randomized MAC private address	**Phone / tablet** Android 13	BR-CAP-SHOP Wireless · Branch-Guest	Randomized (private) MAC — vendor cannot be derived ·	Medium
Lobby-iPad 3c:07:54:1a:88:5e	10.20.40.12 Guest Wi-Fi · VLAN...	Apple Apple, Inc.	**Phone / tablet** iPadOS · iPad	BR-CAP-OFFICE Wireless · Branch-Guest	IEEE OUI vendor · Vendor Apple · Hostname “Lobby-iPad”	Medium
pi-monitor dc:a6:32:7e:11:90	10.20.99.10 Management · VLA...	Raspberry Pi Raspberry Pi Tra...	**IoT / embedded** Linux 6.1.21 · Raspberr...	BR-EDGE Wired · ether2	IEEE OUI vendor · Vendor Raspberry Pi · DHCP class “dhcpcd-9.4.1:Linux-	High
UPS network card 00:c0:b7:4d:22:91	10.20.99.30 Management · VLA...	APC / Schneider AMERICAN POW...	**UPS / power**	BR-CORE Wired · ether22	IEEE OUI vendor · Vendor APC / Schneider · Name “UPS network	High
BR-NAS01 00:11:32:9a:4c:10	10.20.10.5 Office · VLAN 10	Synology Synology Incorpo...	**Storage (NAS)**	BR-EDGE Wired · ether3	IEEE OUI vendor · Vendor Synology · Hostname “BR-NAS01”	High
BR-APP01 00:15:5d:0a:21:07	10.20.10.6 Office · VLAN 10	Hyper-V virtual ...	**Server / VM** Windows	BR-CORE Wired · ether18	MAC prefix 00:15:5d (Hyper-V virtual NIC) · DHCP class “MSFT 5.0”	Medium
Hyper-V host b4:2e:99:6c:40:12	10.20.10.7 Office · VLAN 10	Giga-Byte GIGA-BYTE TEC...	**Server / VM** Windows	BR-CORE Wired · ether18	IEEE OUI vendor · Name “Hyper-V host” · DHCP class “MSFT 5.0”	Low
HP LaserJet - front off... 48:ea:62:8f:2d:41	10.20.10.20 Office · VLAN 10	HP HP Inc.	**Printer / copier**	BR-CORE Wired · ether10	IEEE OUI vendor · Vendor HP · Name “HP LaserJet - front office” ·	High
BRN3C2AF4A1B2C3 3c:2a:f4:a1:b2:c3	10.20.10.21 Office · VLAN 10	Brother Brother Industrie...	**Printer / copier**	BR-CORE Wired · ether11	IEEE OUI vendor · Vendor Brother · Hostname “BRN3C2AF4A1B2C3”	High
Copier 8c:52:19:77:01:ab	10.20.10.22 Office · VLAN 10	Sharp SHARP Corporati...	**Printer / copier**	BR-CORE Wired · ether12	IEEE OUI vendor · Vendor Sharp · Name “Copier”	High
Front desk PC c0:47:0e:3b:91:a2	10.20.10.101 Office · VLAN 10	Dell Dell Inc.	**Computer** Windows	BR-CORE Wired · ether1	IEEE OUI vendor · Vendor Dell · Name “Front desk PC” · Hostname	High
BR-PC-0413 cc:96:e5:12:7d:44	10.20.10.102 Office · VLAN 10	Dell Dell Inc.	**Computer** Windows	BR-CORE Wired · ether2	IEEE OUI vendor · Vendor Dell · Hostname “BR-PC-0413” · DHCP	High
DESKTOP-7Q2M4KX b8:cb:29:5e:20:19	10.20.10.103 Office · VLAN 10	Dell Dell Inc.	**Computer** Windows	BR-CORE Wired · ether3	IEEE OUI vendor · Vendor Dell · Hostname “DESKTOP-7Q2M4KX” ·	High
BR-LT-0201 00:e0:4c:68:12:f3	10.20.10.104 Office · VLAN 10	Realtek REALTEK SEMIC...	**Computer** Windows	BR-CORE Wired · ether4	IEEE OUI vendor · Vendor Realtek · DHCP class “MSFT 5.0”	Medium
Payroll workstation 98:fa:9b:41:0c:7e	10.20.10.105 Office · VLAN 10	Lenovo LCFC(Hefei) Elec...	**Computer** Windows	BR-CORE Wired · ether5	IEEE OUI vendor · Vendor Lenovo · Name “Payroll workstation” ·	High
BR-PC-0417 e4:b9:7a:22:5d:01	10.20.10.106 Office · VLAN 10	Dell Dell Inc.	**Computer** Windows	BR-CORE Wired · ether6	IEEE OUI vendor · Vendor Dell · Hostname “BR-PC-0417” · DHCP	High
SCAN-STATION 8c:16:45:0b:3e:9a	10.20.10.120 Office · VLAN 10	Lenovo LCFC(Hefei) Elec...	**Computer** Windows	BR-CORE Wired · ether24	IEEE OUI vendor · Vendor Lenovo · DHCP class “MSFT 5.0”	Medium

Device	IP / Network	Vendor	Type / OS / model	Seen on	Evidence	Confidence
Shipping label printer 00:07:4d:5a:11:02	10.20.10.121 Office · VLAN 10	Zebra Zebra Technologi...	**Printer / copier**	BR-CORE Wired · ether24	IEEE OUI vendor · Vendor Zebra · Name “Shipping label printer” ·	High
2c:2d:c6:10:44:5a 2c:2d:c6:10:44:5a	10.20.10.122 Office · VLAN 10	Unknown	**IoT / embedded** Embedded Linux	BR-CORE Wired · ether24	OUI not in IEEE registry · DHCP class “udhcp 1.24.1”	Low
SHOP-PC01 8c:16:45:77:3a:10	10.20.10.130 Office · VLAN 10	Lenovo LCFC(Hefei) Elec...	**Computer** Windows	undetermined Wired	IEEE OUI vendor · Vendor Lenovo · DHCP class “MSFT 5.0”	Medium
ESP_3A1F2C 24:0a:c4:3a:1f:2c	10.20.10.131 Office · VLAN 10	Espressif Espressif Inc.	**IoT / embedded**	undetermined Wired	IEEE OUI vendor · Vendor Espressif · Hostname “ESP_3A1F2C”	High
Shop thermostat 44:61:32:9b:0e:11	10.20.10.132 Office · VLAN 10	ecobee ecobee inc	**Building / HVAC**	undetermined Wired	IEEE OUI vendor · Vendor ecobee · Name “Shop thermostat” · Hostname	High
Jamies-iPhone 5a:3c:91:0d:7e:21	10.20.50.101 Staff Wi-Fi · VLAN 50	Randomized MAC private address	**Phone / tablet** iOS · iPhone	BR-CAP-OFFICE Wireless · Branch-Staff	Randomized (private) MAC — vendor cannot be derived ·	Medium
Galaxy-S24 9e:12:44:70:a5:0b	10.20.50.102 Staff Wi-Fi · VLAN 50	Randomized MAC private address	**Phone / tablet** Android	BR-CAP-OFFICE Wireless · Branch-Staff	Randomized (private) MAC — vendor cannot be derived ·	High
BR-MBP-07 f0:18:98:4a:61:7c	10.20.50.103 Staff Wi-Fi · VLAN 50	Apple Apple, Inc.	**Computer** macOS	BR-CAP-OFFICE Wireless · Branch-Staff	IEEE OUI vendor · Hostname “BR-MBP-07”	Medium
BR-LT-0230 8c:f8:c5:31:9d:02	10.20.50.104 Staff Wi-Fi · VLAN 50	Intel Intel Corporate	**Computer** Windows	BR-CAP-OFFICE Wireless · Branch-Staff	IEEE OUI vendor · Vendor Intel · DHCP class “MSFT 5.0”	Medium
Warehouse scanner 00:07:4d:8e:21:44	10.20.50.105 Staff Wi-Fi · VLAN 50	Zebra Zebra Technologi...	**Phone / tablet** Android 11	BR-CAP-SHOP Wireless · Branch-Staff	IEEE OUI vendor · DHCP class “android-dhcp-11”	Medium
amazon-4e1f22a7 0c:dc:91:5b:7c:3e	10.20.50.106 Staff Wi-Fi · VLAN 50	Amazon Amazon Technol...	**Smart speaker / media**	BR-CAP-SHOP Wireless · Branch-Staff	IEEE OUI vendor · Vendor Amazon	Low
SIP-T54W 80:5e:c0:1a:2b:31	10.20.20.101 Voice · VLAN 20	Yealink YEALINK(XIAME...	**IP phone** SIP-T54W	BR-POE Wired · ether3	IEEE OUI vendor · Vendor Yealink · Hostname “SIP-T54W” · DHCP class	High
SIP-T54W 80:5e:c0:1a:2b:5c	10.20.20.102 Voice · VLAN 20	Yealink YEALINK(XIAME...	**IP phone** SIP-T54W	BR-POE Wired · ether4	IEEE OUI vendor · Vendor Yealink · Hostname “SIP-T54W” · DHCP class	High
SIP-T54W 44:db:d2:07:91:e2	10.20.20.103 Voice · VLAN 20	Yealink YEALINK(XIAME...	**IP phone** SIP-T54W	BR-POE Wired · ether5	IEEE OUI vendor · Vendor Yealink · Hostname “SIP-T54W” · DHCP class	High
SIP-T54W 44:db:d2:07:93:0a	10.20.20.104 Voice · VLAN 20	Yealink YEALINK(XIAME...	**IP phone** SIP-T54W	BR-POE Wired · ether6	IEEE OUI vendor · Vendor Yealink · Hostname “SIP-T54W” · DHCP class	High
SIP-T46U 24:9a:d8:90:41:7b	10.20.20.105 Voice · VLAN 20	Yealink YEALINK(XIAME...	**IP phone** SIP-T46U	BR-POE Wired · ether7	IEEE OUI vendor · Vendor Yealink · Hostname “SIP-T46U” · DHCP class	High
SIP-T46U 24:9a:d8:90:42:c4	10.20.20.106 Voice · VLAN 20	Yealink YEALINK(XIAME...	**IP phone** SIP-T46U	BR-POE Wired · ether8	IEEE OUI vendor · Vendor Yealink · Hostname “SIP-T46U” · DHCP class	High
Contractor laptop 50:eb:71:2a:0d:19	10.20.10.140 Office · VLAN 10	Intel Intel Corporate	**Computer** Windows	recently seen last seen 3d ago	IEEE OUI vendor · Vendor Intel · Name “Contractor laptop” ·	High
2c:2d:c6:99:01:23 2c:2d:c6:99:01:23	10.20.10.141 Office · VLAN 10	Unknown	**Unknown**	recently seen last seen 20d ago	OUI not in IEEE registry	Unknown
Board-room iPad 6e:1d:2c:88:41:f0	10.20.50.140 Staff Wi-Fi · VLAN 50	Randomized MAC private address	**Phone / tablet** iPadOS · iPad	recently seen last seen 6d ago	Randomized (private) MAC — vendor cannot be derived ·	High
Loaner phone 2a:91:5f:03:7c:66	10.20.50.141 Staff Wi-Fi · VLAN 50	Randomized MAC private address	**Phone / tablet** Android 14	recently seen last seen 12d ago	Randomized (private) MAC — vendor cannot be derived ·	Medium