

Telflow - Notification Event API Details

- Document History
 - Version Control
 - Approved By
- Introduction
- Scope
- Glossary
- Solution Context
 - Context Diagram
- Proposed Solution
 - Integration Overview
 - Systems and Integration Details
 - API Notifications
 - Telflow Callback URL
 - Authentication
 - Get Access Token
 - Refresh Access Token
 - Error Codes
 - Resource Structure Description
 - Notification
 - Event
 - Order
 - Sample Template
 - Notification Event Template Structure
 - Notification Event
 - Swagger and EICD
 - Use Case Journeys
 - Join & Buy
 - Use Case - Set 1 Regular Customer buys FTTH
 - WFM
 - Sample Notification - OK
 - Sample Notification - Ready
 - Sample Notification - Acknowledged
 - Sample Notification - Accepted
 - Sample Notification - Trip Started
 - Sample Notification - Customer Premises
 - Sample Notification - In Work
 - Sample Notification - CPE Installation Completed
 - Sample Notification - ME Installation Completed
 - Sample Notification - UAT Completed (CPE) / Completed (ME)
 - Open Access
 - Sample Notification - Service Qualification (Success)
 - Sample Notification - Service Qualification (Failure)
 - Sample Notification - Service Installation (STC)
 - Sample Notification - Service Installation (ITC)
 - Sample Notification - Service Installation (Dawiyat)
 - Nokia FlowOne
 - Sample Notification - Acknowledged
 - Sample Notification - In Progress
 - Sample Notification - Completed
 - Sample Notification - Failed
 - Use Case - Set 2 Customer Rejects UAT - Mobily Infra
 - Nokia FlowOne
 - Change
 - Use Case - Set 1 Installation Failures
 - WFM
 - Sample Notification - Completed (with reason code and reason text)
 - Open Access
 - Sample Notification - ITC
 - Sample Notification - Dawiyat
 - Sample Notification - STC
 - Use Case - Set 2 Suspend
 - Nokia FlowOne
 - Sample Notification
 - Open Access
 - Sample Notification - ITC
 - Sample Notification - STC
 - Use Case - Set 3 Resume
 - Nokia FlowOne
 - Sample Notification
 - Open Access
 - Sample Notification - ITC
 - Sample Notification - STC
 - Use Case - Set 4 Bandwidth Change
 - Nokia FlowOne

- Sample Notification
 - Open Access
 - Sample Notification - ITC
 - Sample Notification - Dawiyat
 - Sample Notification - STC
- Use Case - Set 5 Relocation
 - Nokia FlowOne
 - Sample Notification
 - WFM
 - Sample Notification - OK
 - Sample Notification - Ready
 - Sample Notification - Acknowledged
 - Sample Notification - Accepted
 - Sample Notification - Trip Started
 - Sample Notification - Customer Premises
 - Sample Notification - In Work
 - Sample Notification - Completed
 - Open Access
 - Sample Notification (Service Qualification)
 - Sample Notification - STC
 - Sample Notification - ITC
 - Sample Notification - Dawiyat
- Use Case - Set 6 Rewiring
 - WFM
 - Sample Notification
 - Open Access
 - Sample Notification - Dawiyat
- Use Case - Set 7 Device Swap
 - WFM (CPE/HAG)
 - Sample Notification - OK
 - Sample Notification - Ready
 - Sample Notification - Acknowledged
 - Sample Notification - Accepted
 - Sample Notification - Trip Started
 - Sample Notification - Customer Premises
 - Sample Notification - In Work
 - Sample Notification - CPE Installation Completed
 - Sample Notification - Completed
 - Open Access (ONT)
 - Sample Notification - ITC
 - Sample Notification - STC
 - Sample Notification - Dawiyat
- Use Case - Set 8 Customer raises issue
 - WFM
 - Sample Notification
 - Open Access
 - Sample Notification - ITC/STC/Dawiyat (Create/Re-Open SR)
- Leave
 - Use Case - Set 1 FTTH Termination
 - Nokia FlowOne
 - Sample Notification
 - Open Access
 - Sample Notification - ITC
 - Sample Notification - Dawiyat
 - Sample Notification - STC

Document History

Version Control

Version	Date	Company	Author	Description
1.0	07 Nov 2025	CSG	K Babu	Initial Draft

Approved By

Version	Approval Date	Company	Approver	Comments
1.0		CSG		

Introduction

In Mobily, Telflow plays the role of Product Order Manager (POM) orchestrating the orders for FTTH and Fixed Voice service. During order processing, for example, the provisioning requests are sent to downstream systems and the responses are handled asynchronously via notifications (TMF / Bespoke).

Scope


This document describes the notification event API details that are to be implemented in Telflow.

Glossary

Term	Definition

Solution Context

Context Diagram

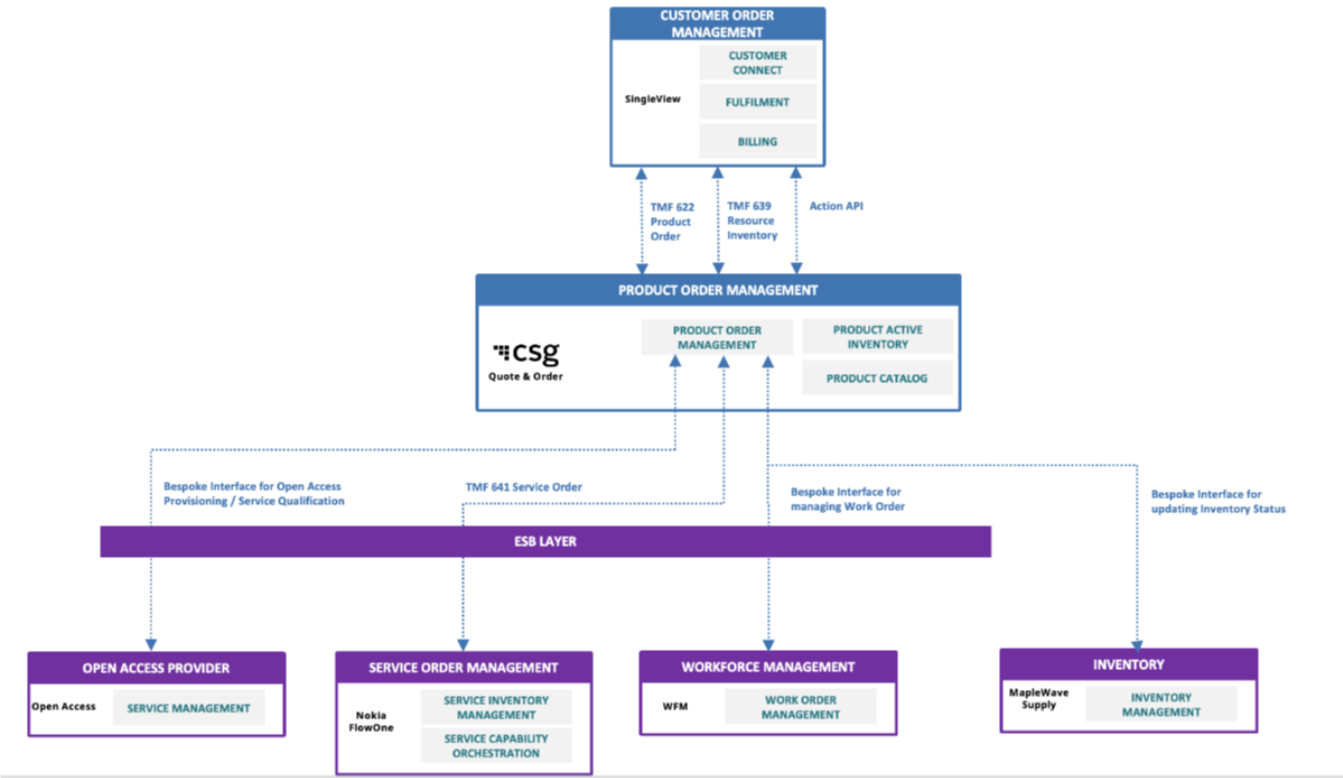

Proposed Solution

Integration Overview

Note:

This document doesn't cover the SingleView integration.

Systems and Integration Details

S.No	System / Application	Integration	Via ESB?
------	----------------------	-------------	----------

1	Nokia FlowOne	TMF 641	Yes
2	Open Access	Bespoke	Yes
3	WFM	Bespoke	Yes

API Notifications

1. A callback URL must be registered as a listener in the external system to send the notification events to the Telflow.
2. Telflow acknowledges the reception of the notification with the HTTP code 200.
3. REST is the supported interface.

Telflow Callback URL

S.No	System / Application	Callback URL	Method
1	Nokia FlowOne	https://<hostname>/tmf-api/serviceOrderingManagement/v1/notification/	POST
2	Open Access	https://<hostname>/serviceInstallationManagement/v1/notification/	POST
3	WFM	https://<hostname>/workForceManagement/v1/notification/	POST

Authentication

The external systems must be authenticated via access token before sending the notification events to Telflow. Following are the details,

Get Access Token

URL	https://<host>/auth/realms/telflow/protocol/openid-connect/token
METHOD	POST

Request
Header: Body: (Form URL Encoded) client_id = wfm-system client_secret = <client secret> username = mob-wfm-admin password = <password> grant_type = password
Response
200 <pre>{ "access_token": <token> "expires_in": 3600, "refresh_expires_in": 4500, "refresh_token": <refresh_token> "token_type": "Bearer", "not-before-policy": 0, "session_state": "scope": }</pre>

Refresh Access Token

URL	https://<host>/auth/realms/telflow/protocol/openid-connect/token
METHOD	POST

Request

Header: Body: (Form URL Encoded) client_id = wfm-system client_secret = <client secret> refresh_token = <refresh_token> grant_type = refresh_token
Response
200 <pre>{ "access_token": <token> "expires_in": 3600, "refresh_expires_in": 4500, "refresh_token": <refresh_token> "token_type": "Bearer", "not-before-policy": 0, "session_state": "scope": }</pre>

Below are the details applicable for various environments,

Environment	External System	Client Id	Client Secret	Username	Password
DEV	ESB (Nokia FlowOne, WFM, Open Access)				
SIT					
UAT					
PRE-PROD					
PROD					

Error Codes

Following are the error codes that are supported,

HTTP Response Code	Description
200	Success Request was successfully authorised and processed. The relevant entities will be returned in response.
201	Created Request was successfully authorised and processed. Creation of the requested entity has been confirmed and will be returned in response.
202	Accepted Request was successfully authorised, but not necessarily been processed. The latest state of the relevant entity will be returned in response.
204	No Content Request was successfully authorised and processed. No response required.
400	Bad Request Request data fails validation or does not conform to expected format.
401	Unauthorised User has not been authenticated.

403	Forbidden User does not have permission to access the requested resource.
404	Not Found Requested resource does not exist or is unavailable.
405	Method Not Allowed Requested operation is not supported.
500	Internal Server Error An unexpected error has occurred within the system.

Error Response
403 <pre>{ "error": "invalid_grant", "error_description": "Access token is expired" }</pre>

Resource Structure Description

Notification

Resource Name	Key	Mandatory /Optional	Data Type	Description	Supported Values	Sample Values	Assumption /Comment
Notification	eventId	M	String				
	eventTime	O	String				
	eventType	M	String		serviceOrderStateChangeNotification, workOrderStateChangeNotification	serviceOrderStateChangeNotification	
	event	M	Event				

Event

Sub-Resource Name	Key	Mandatory/Optional	Data Type	Description	Supported Values	Sample Values	Assumption/Comment
	<Type of Order>	M	Order	Order Type	workOrder, serviceOrder	serviceOrder	

Order

Sub-Resource Name	Key	Mandatory /Optional	Data Type	Description	Supported Values	Sample Values	Assumption/Comment
Order	id	M	String	External system order Id		342354325	
	state	M	String	Order status		completed	
	<Request Body>	O	Request	Request body			Optionally the request sent from Telflow to external system can be embedded in this structure.

Sample Template

Notification Event Template Structure

```

{
  "eventId": "<Event Id>",
  "eventTime": "<Event Date/Time>",
  "eventType": "<Event Type>",
  "event": {
    "<Type of Order>": {
      "id": "<External system order Id>",
      "state": "<Order state>",
      .....,
      .....,
      <Request Body>
    }
  }
}

```

Notification Event

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "20250117234846",
      "state": "completed",
      .....,
      .....
    }
  }
}

```

Swagger and EICD

Below are the swagger files and EICD applicable per systems,

S.No	System	Swagger	EICD	Comments
1	WFM	 WFM-event-no...ons-v4.0.yml		
2	Open Access	 OpenAccess-e...ons-v1.0.yml		

3	Nokia FlowOne		 EICD_NOKIA_S...641-v2.1.pdf	
---	---------------	--	---	--

Use Case Journeys

The following use cases are supported in this solution release, and are each reflected by a variation of Telflow product order type (new/change/terminate).

Join & Buy

Use Case - Set 1 Regular Customer buys FTTH

- Customer buys new FTTH product via POS/Tafeely
- Customer buys new FTTH product via Digital
- Staff buys new FTTH product

WFM

Sample Notification - OK

```
{
  "eventId": "Event-ORD0000000003056",
  "eventTime": "2025-11-02T05:11:45.922Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123457",
      "externalId": "ORD1917819",
      "state": "OK",
      "code": "1000"
    }
  }
}
```

Sample Notification - Ready

```
{
  "eventId": "Event-ORD0000000003057",
  "eventTime": "2025-11-02T05:11:50.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123458",
      "externalId": "ORD1917819",
      "state": "Ready",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Acknowledged


```
{
  "eventId": "Event-ORD000000003055",
  "eventTime": "2025-11-02T05:12:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123456",
      "externalId": "ORD1917819",
      "state": "ACKNOWLEDGED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Accepted

```
{
  "eventId": "Event-ORD000000003058",
  "eventTime": "2025-11-02T05:12:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123459",
      "externalId": "ORD1917819",
      "state": "ACCEPTED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Trip Started

```
{
  "eventId": "Event-ORD000000003059",
  "eventTime": "2025-11-02T05:13:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123460",
      "externalId": "ORD1917819",
      "state": "TRIP STARTED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Customer Premises

```
{
  "eventId": "Event-ORD000000003060",
  "eventTime": "2025-11-02T05:13:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123461",
      "externalId": "ORD1917819",
      "state": "CUSTOMER PREMISES",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - In Work

```

{
  "eventId": "Event-ORD000000003061",
  "eventTime": "2025-11-02T05:14:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123462",
      "externalId": "ORD1917819",
      "state": "IN WORK",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}

```

Sample Notification - CPE Installation Completed

```

{
  "eventId": "Event-ORD000000003062",
  "eventTime": "2025-11-02T05:14:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123463",
      "externalId": "ORD1917819",
      "state": "Installation Completed",
      "devices": [
        {
          "integrationId": "1-E1B80T8",
          "newSerialNumber": "QAELIFE19923451"
        }
      ],
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}

```

Sample Notification - ME Installation Completed

```

{
  "eventId": "Event-ORD000000003063",
  "eventTime": "2025-11-02T05:15:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123464",
      "externalId": "ORD1917819",
      "state": "Installation Completed",
      "devices": [
        {
          "integrationId": "1-DYJSAJG",
          "newSerialNumber": "39525857817"
        },
        {
          "integrationId": "1-DYJSAJH",
          "newSerialNumber": "39525857816"
        },
        {
          "integrationId": "1-DYJSAJI",
          "newSerialNumber": "39525857815"
        }
      ],
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}

```

Sample Notification - UAT Completed (CPE) / Completed (ME)

```

{
  "eventId": "Event-ORD000000003065",
  "eventTime": "2025-11-02T05:16:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123466",
      "externalId": "ORD1917819",
      "state": "COMPLETED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "odbPort": "343",
      "reasonCode": "0",
      "reasonText": "Successful",
      "comments": "Engineer Comment",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}

```

Open Access

Sample Notification - Service Qualification (Success)

Ordered

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceQualificationNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "F-MY81995397",
      "lineItemIdIdentifier": "F001-MY81995397-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "F-MY81995397"
    }
  }
}

```

Completed

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceQualificationNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "F-MY81995397",
      "lineItemIdIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "COMPLETED",
      "comments": "",
      "providerStatus": "COMPLETED",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "F-MY81995397",
      "feasibilityStatus" : "FEASIBLE",
      "reservationNumber" : "F-F100-MY81995397"
    }
  }
}

```

Closed

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceQualificationNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "F-MY81995397",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "CLOSED",
      "comments": "",
      "providerStatus": "",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "F-MY81995397",
      "feasibilityStatus" : "FEASIBLE",
      "reservationNumber" : ""
    }
  }
}
```

Sample Notification - Service Qualification (Failure)

Completed

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceQualificationNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "F-MY81995397",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "COMPLETED",
      "comments": "",
      "providerStatus": "COMPLETED",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "F-MY81995397",
      "feasibilityStatus" : "INFEASIBLE",
      "reservationNumber" : ""
    }
  }
}
```

Closed

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceQualificationNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "F-MY81995397",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "CLOSED",
      "comments": "",
      "providerStatus": "",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "F-MY81995397",
      "feasibilityStatus" : "INFEASIBLE",
      "reservationNumber" : ""
    }
  }
}

```

Sample Notification - Service Installation (STC)

WO Created in WFMS

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "IN-PROCESS",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "WO Created in WFMS",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : " " //need to ask
    }
  }
}

```

Technician Assignment

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Technician Assignment",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Technician Working

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Technician Working",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Activate ONT


```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Activate ONT",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

TEST_FTTH_LINK

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "STC_CPE_UPDATE",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "TEST_FTTH_LINK",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "", //need to ask
      "devices": [
        {
          "integrationId": "",
          "newSerialNumber": "485754431986DAB3"
        }
      ]
    }
  }
}

```

Closed

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Sample Notification - Service Installation (ITC)

Create Task

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Create Task, start time is 2025-09-17 17:47:18",
      "orderStatus": "Create Task",
      "comments": "",
      "providerStatus": "Create Task",
      "providerMilestone": "", //not present
      "providerComments": "Create Task, start time is 2025-09-17 17:47:18",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Assigned

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Create Task, start time is 2025-09-17 17:47:18",
      "orderStatus": "Assigned",
      "comments": "",
      "providerStatus": "Assigned",
      "providerMilestone": "",
      "providerComments": "Create Task, start time is 2025-09-17 17:47:18",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Accepted

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Engineer Er.Jaffar.Salim accepts the Task at 2025-09-17 18:46:50",
      "orderStatus": "Accepted",
      "comments": "",
      "providerStatus": "Accepted",
      "providerMilestone": "",
      "providerComments": "Engineer Er.Jaffar.Salim accepts the Task at 2025-09-17 18:46:50",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Set Off

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Engineer Er.Jaffar.Salim starts out at 2025-09-17 19:32:42",
      "orderStatus": "Set Off",
      "comments": "",
      "providerStatus": "Set Off",
      "providerMilestone": "",
      "providerComments": "Engineer Er.Jaffar.Salim starts out at 2025-09-17 19:32:42",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Serial Number Notification

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "Installation Completed", //DP to send this.
      "comments": "",
      "providerStatus": "Installation Completed", //DP to send this.
      "providerMilestone": "Installation Completed", //DP to send this.
      "providerComments": "",
      "serviceAccNum" : "",
      "devices": [
        {
          "integrationId": "",
          "newSerialNumber": "QAELIFE19923451"
        }
      ]
    }
  }
}

```

Success

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "New installation with 40m cable old cable ATB cut",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "",
      "providerComments": "New installation with 40m cable old cable ATB cut",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Sample Notification - Service Installation (Dawiyat)

InProgress

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Broadband Service Install",
      "orderStatus": "InProgress",
      "comments": "",
      "providerStatus": "InProgress",
      "providerMilestone": "InProgress",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //Need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Acknowledged

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "Acknowledged",
      "comments": "",
      "providerStatus": "Acknowledged",
      "providerMilestone": "Acknowledged",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Dispatch

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Dispatch",
      "comments": "",
      "providerStatus": "InProgress-Dispatch",
      "providerMilestone": "InProgress-Dispatch",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Departure

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Departure",
      "comments": "",
      "providerStatus": "InProgress-Departure",
      "providerMilestone": "InProgress-Departure",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Arrival

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Arrival",
      "comments": "",
      "providerStatus": "InProgress-Arrival",
      "providerMilestone": "InProgress-Arrival",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Serial Number Notification

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "Installation Completed",
      "comments": "",
      "providerStatus": "Installation Completed",
      "providerMilestone": "Installation Completed",
      "providerComments": "",
      "orderTransactionNo" : "",
      "serviceAccNum" : "",
      "devices": [
        {
          "integrationId": "",
          "newSerialNumber": "QAELIFE19923451"
        }
      ]
    }
  }
}

```

InProgress-HAG Activation-Successful

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-HAG Activation-Successful",
      "comments": "",
      "providerStatus": "InProgress-HAG Activation-Successful",
      "providerMilestone": "InProgress-HAG Activation-Successful",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Completed


```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "Completed",
      "comments": "",
      "providerStatus": "Completed",
      "providerMilestone": "Completed",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Nokia FlowOne

Sample Notification - Acknowledged

```

{
  "eventId": "98ea1010-3ca6-4f8b-950c-c2fd26314571",
  "eventTime": "2023-02-03T14:20:48.321+03:00",
  "eventType": "ServiceOrderCreateEvent",
  "event": {
    "serviceOrder": {
      "id": "23856647",
      "messageId": "98ea1010-3ca6-4f8b-950c-c2fd26314571",
      "state": "acknowledged",
      "requestedStartDate": null,
      "requestedCompletionDate": null,
      "orderDate": null,
      "startDate": null,
      "completionDate": null,
      "cancellationDate": null,
      "requestedCancellationDate": null,
      "externalId": "10",
      "priority": "5",
      "clientId": "1",
      "description": "service order creation",
      "category": "FIXED_B2C",
      "serviceOrderItem": [
        {
          "id": "1",
          "action": "Activate",
          "orderItemRelationship": [
            ],
          "service": {
            "id": "S1",
            "serviceSpecification": {
              "name": "CFS_FTTH_DATA"
            },
            "serviceCharacteristic": [
              {
                "name": "serviceAccountId",
                "value": "<serviceAccountId>"
              },
              {
                "name": "qosProfile",

```

```

        "value": "<qosProfile>"
      },
      {
        "name": "odbId",
        "value": "<odbId>"
      },
      {
        "name": "paymentType",
        "value": "Postpaid/Prepaid"
      },
      {
        "name": "provider",
        "value": "<provider>"
      },
      {
        "name": "cpeType",
        "value": "ONT"
      },
      {
        "name": "cpeSerialNum",
        "value": "<cpeSerialNum>"
      },
      {
        "name": "cpeModel",
        "value": "<cpeModel>"
      },
      {
        "name": "cpeMacAddress",
        "value": "<cpeMacAddress>"
      },
      {
        "name": "cpeInstallDate",
        "value": "<cpeInstallDate>"
      }
    ]
  }
}
}
}
}
}

```

Sample Notification - In Progress

```

{
  "eventId": "58accc43-5775-49a3-adca-6702f1265033",
  "eventTime": "2025-06-20T15:14:57.68+03:00",
  "eventType": "ServiceOrderStateChangeEvent",
  "event": {
    "serviceOrder": {
      "externalId": "32",
      "id": "29052",
      "state": "InProgress",
      "stateMessage": null,
      "serviceOrderItem": {
        "phaseNote": {
          "id": "NOTIF_01",
          "message": "Phase VALIDATION has completed successfully."
        }
      }
    }
  }
}

```

Sample Notification - Completed

```
{
  "eventId": "d8e2d383-ed61-4c89-85b5-f3ccf9b7a62d",
  "eventTime": "2025-06-23T09:31:07.608+03:00",
  "eventType": "ServiceOrderStateChangeEvent",
  "event": {
    "serviceOrder": {
      "externalId": "32",
      "id": "29054",
      "state": "completed",
      "stateMessage": "REQUEST COMPLETED",
      "priority": "5",
      "href": null,
      "category": "FIXED_B2C",
      "description": "service order creation",
      "startDate": "2025-06-23T09:24:19.404+03:00",
      "orderDate": "2025-06-23T09:24:19.404+03:00",
      "completionDate": "2025-06-23T09:31:06.549+03:00",
      "requestedCompletionDate": null,
      "notificationContact": null,
      "@baseType": null,
      "@schemaLocation": null,
      "@type": "Provide",
      "externalReference": [
        {
          "id": "1",
          "name": "1000123300000101",
          "externalReferenceType": "USED_PRIM_SUB_ID"
        },
        {
          "id": "2",
          "name": "1000123300000102",
          "externalReferenceType": "USED_SECO_SUB_ID"
        }
      ],
      "relatedParty": [
        {
          "id": "1000123300000101",
          "role": "SUBSCRIBER",
          "@type": "Corporate"
        }
      ],
      "serviceOrderItem": [
        {
          "id": "1",
          "action": "Activate",
          "service": {
            "id": "S1",
            "serviceCharacteristic": [
              {
                "name": "cpeModel",
                "value": "MS012"
              },
              {
                "name": "paymentType",
                "value": "Prepaid"
              },
              {
                "name": "seeker",
                "value": "Zain"
              },
              {
                "name": "cpeMacAddress",
                "value": "CCCC.ABAB.6414"
              },
              {
                "name": "odbId",
                "value": "ANIL_TEST_12346"
              },
              {
                "name": "skipCpeDiscovery",
                "value": "true"
              }
            ]
          }
        }
      ]
    }
  }
}
```



```
    "name": "10001233000000099",
    "externalReferenceType": "USED_SECO_SUB_ID"
  }
],
"relatedParty": [
  {
    "id": "10001233000000098",
    "name": "NOKIA_MOBILY",
    "role": "SUBSCRIBER",
    "@type": "Corporate"
  }
],
"serviceOrderItem": [
  {
    "id": "1",
    "action": "Activate",
    "service": {
      "id": "S1",
      "serviceCharacteristic": [
        {
          "name": "cpeModel",
          "value": "HWTC"
        },
        {
          "name": "odbId",
          "value": "SULY-5600-02"
        },
        {
          "name": "skipCpeDiscovery",
          "value": "true"
        },
        {
          "name": "isRcy",
          "value": "false"
        },
        {
          "name": "serviceID",
          "value": "S1"
        },
        {
          "name": "qosProfile",
          "value": "FTTH_A"
        },
        {
          "name": "paymentType",
          "value": "Prepaid"
        },
        {
          "name": "cpeType",
          "value": "ONT"
        },
        {
          "name": "seeker",
          "value": "STC"
        },
        {
          "name": "cpeMacAddress",
          "value": "CCCC.ABAB.6414"
        },
        {
          "name": "serviceAccountId",
          "value": "10001233000000099"
        },
        {
          "name": "provider",
          "value": "MOBILY"
        },
        {
          "name": "cpeSerialNum",
          "value": "48575443C07B007C"
        }
      ]
    }
  }
]
```

```
    ],  
    "serviceSpecification": {  
      "name": "CFS_FTTH_DATA"  
    }  
  }  
]  
}  
}
```

Use Case - Set 2 Customer Rejects UAT - Mobily Infra

Nokia FlowOne

During UAT expiry, Suspend/Resume requests shall be initiated from Telflow towards Nokia FlowOne and the applicable notifications are,

1. acknowledged
2. inProgress
3. completed

The notifications are similar to activation use case except the 'type' and the 'action' shall vary,

1. type Modify
2. action Suspend / Resume

Change

Use Case - Set 1 Installation Failures

- Installation failure scenarios for Mobily Infra
- Installation failure scenarios for Open Access

WFM

Sample Notification - Completed (with reason code and reason text)

```
{
  "eventId": "Event-ORD000000003065",
  "eventTime": "2025-11-02T05:16:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123466",
      "externalId": "ORD1917819",
      "state": "COMPLETED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "odbPort": "343",
      "reasonCode": "2017",
      "reasonText": "NS-Wrong ODB ID",
      "comments": "Engineer Comment",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Open Access

Sample Notification - ITC

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "ITC_ORDER_UPDATE",
      "externalId": "1-30383004715",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "Failure",
      "providerMilestone": "Failure",
      "providerComments": "Customer is not available",
      "orderTransactionNo" : "", //Need to ask
      "serviceAccNum" : "100130383022753",
      "reasonCode": "No Details",
      "reasonText": "Customer is not available"
    }
  }
}

```

Sample Notification - Dawiyat

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "DOWIYAT_ORDER_UPDATE",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "Pending",
      "providerMilestone": "Pending",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "", //Need to ask
      "serviceAccNum" : "", //need to ask
      "reasonCode": "Wrong customer contact",
      "reasonText": "Wrong customer contact:customer unavailable"
    }
  }
}

```

Sample Notification - STC

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "STC_ORDER_UPDATE",
      "externalId": "I-MY81995397",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "",
      "providerComments": "B166-OLO: B166-OLO - Commercial Site",
      "orderTransactionNo" : "", //Need to ask
      "serviceAccNum" : "",
      "reasonCode": "B166-OLO",
      "reasonText": "B166-OLO - Commercial Site"
    }
  }
}

```

Use Case - Set 2 Suspend

- FTTH service suspension for Open Access

Nokia FlowOne

Sample Notification

[Reference](#)

Open Access

Note: Notifications are not applicable for Dawiyat provider.

Sample Notification - ITC

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "20250823093424",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "", //not present
      "providerComments": "Success",
      "orderTransactionNo" : "20250823093424",
      "serviceAccNum" : "1001267389365550"
    }
  }
}

```

Sample Notification - STC


```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "D-MY23831670",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "", //not present
      "providerComments": "",
      "orderTransactionNo" : "D-MY23831670",
      "serviceAccNum" : ""
    }
  }
}

```

Use Case - Set 3 Resume

- FTTH service resume for Open Access

Nokia FlowOne

Sample Notification

[Reference](#)

Open Access

Note: Notifications are not applicable for Dawiyat provider.

Sample Notification - ITC

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "20250823093424",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "", //not present
      "providerComments": "Success",
      "orderTransactionNo" : "20250823093424",
      "serviceAccNum" : "1001267389365550"
    }
  }
}

```

Sample Notification - STC

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "E-MY23831670",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "", //not present
      "providerComments": "",
      "orderTransactionNo" : "E-MY23831670",
      "serviceAccNum" : ""
    }
  }
}
```

Use Case - Set 4 Bandwidth Change

- Bandwidth change for Mobily/Open Access

Nokia FlowOne

Sample Notification

[Reference](#)

Open Access

Sample Notification - ITC

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "20250823093424",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "", //not present
      "providerComments": "Success",
      "orderTransactionNo" : "20250823093424",
      "serviceAccNum" : "1001267389365550"
    }
  }
}
```

Sample Notification - Dawiyat

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Broadband Service Change Package",
      "orderStatus": "Completed",
      "comments": "",
      "providerStatus": "Completed",
      "providerMilestone": "Completed",
      "providerComments": "Broadband Service Change Package",
      "orderTransactionNo" : "OLOCRMN020250926152129",
      "serviceAccNum" : "DAWFTTH00433122"
    }
  }
}
```

Sample Notification - STC

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "C-MY23831670_1",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "", //not present
      "providerComments": "",
      "orderTransactionNo" : "C-MY23831670_1",
      "serviceAccNum" : ""
    }
  }
}
```

Use Case - Set 5 Relocation

- FTTH Relocation for Mobily/Open Access

Nokia FlowOne

Sample Notification

[Reference](#)

WFM

Sample Notification - OK

```
{
  "eventId": "Event-ORD000000003056",
  "eventTime": "2025-11-02T05:11:45.922Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123457",
      "externalId": "ORD1917819",
      "state": "OK",
      "code": "1000"
    }
  }
}
```

Sample Notification - Ready

```
{
  "eventId": "Event-ORD000000003057",
  "eventTime": "2025-11-02T05:11:50.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123458",
      "externalId": "ORD1917819",
      "state": "Ready",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Acknowledged

```
{
  "eventId": "Event-ORD000000003055",
  "eventTime": "2025-11-02T05:12:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123456",
      "externalId": "ORD1917819",
      "state": "ACKNOWLEDGED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Accepted

```
{
  "eventId": "Event-ORD000000003058",
  "eventTime": "2025-11-02T05:12:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123459",
      "externalId": "ORD1917819",
      "state": "ACCEPTED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Trip Started

```
{
  "eventId": "Event-ORD000000003059",
  "eventTime": "2025-11-02T05:13:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123460",
      "externalId": "ORD1917819",
      "state": "TRIP STARTED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Customer Premises

```
{
  "eventId": "Event-ORD000000003060",
  "eventTime": "2025-11-02T05:13:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123461",
      "externalId": "ORD1917819",
      "state": "CUSTOMER PREMISES",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - In Work

```
{
  "eventId": "Event-ORD000000003061",
  "eventTime": "2025-11-02T05:14:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123462",
      "externalId": "ORD1917819",
      "state": "IN WORK",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Completed

```

{
  "eventId": "Event-ORD000000003065",
  "eventTime": "2025-11-02T05:16:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123466",
      "externalId": "ORD1917819",
      "state": "COMPLETED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "odbPort": "343",
      "reasonCode": "0",
      "reasonText": "Successful",
      "comments": "Engineer Comment",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}

```

Open Access

Sample Notification (Service Qualification)

[Success](#)

[Failure](#)

Sample Notification - STC

WO Created in WFMS

```

{
  "eventId": "Event-TF000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "IN-PROCESS",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "WO Created in WFMS",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : " " //need to ask
    }
  }
}

```

Technician Assignment

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Technician Assignment",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Technician Working

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Technician Working",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Activate ONT


```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Activate ONT",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Closed

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Sample Notification - ITC

Create Task

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Create Task, start time is 2025-09-17 17:47:18",
      "orderStatus": "Create Task",
      "comments": "",
      "providerStatus": "Create Task",
      "providerMilestone": "", //not present
      "providerComments": "Create Task, start time is 2025-09-17 17:47:18",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Assigned

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Create Task, start time is 2025-09-17 17:47:18",
      "orderStatus": "Assigned",
      "comments": "",
      "providerStatus": "Assigned",
      "providerMilestone": "",
      "providerComments": "Create Task, start time is 2025-09-17 17:47:18",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Accepted

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Engineer Er.Jaffar.Salim accepts the Task at 2025-09-17 18:46:50",
      "orderStatus": "Accepted",
      "comments": "",
      "providerStatus": "Accepted",
      "providerMilestone": "",
      "providerComments": "Engineer Er.Jaffar.Salim accepts the Task at 2025-09-17 18:46:50",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Set Off

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Engineer Er.Jaffar.Salim starts out at 2025-09-17 19:32:42",
      "orderStatus": "Set Off",
      "comments": "",
      "providerStatus": "Set Off",
      "providerMilestone": "",
      "providerComments": "Engineer Er.Jaffar.Salim starts out at 2025-09-17 19:32:42",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Success

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "New installation with 40m cable old cable ATB cut",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "",
      "providerComments": "New installation with 40m cable old cable ATB cut",
      "serviceAccNum" : "1001269526537281"
    }
  }
}
```

Sample Notification - Dawiyat

InProgress

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Broadband Service Install",
      "orderStatus": "InProgress",
      "comments": "",
      "providerStatus": "InProgress",
      "providerMilestone": "InProgress",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //Need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}
```

Acknowledged

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "Acknowledged",
      "comments": "",
      "providerStatus": "Acknowledged",
      "providerMilestone": "Acknowledged",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Dispatch

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Dispatch",
      "comments": "",
      "providerStatus": "InProgress-Dispatch",
      "providerMilestone": "InProgress-Dispatch",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Departure

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Departure",
      "comments": "",
      "providerStatus": "InProgress-Departure",
      "providerMilestone": "InProgress-Departure",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Arrival

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Arrival",
      "comments": "",
      "providerStatus": "InProgress-Arrival",
      "providerMilestone": "InProgress-Arrival",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-HAG Activation-Successful

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-HAG Activation-Successful",
      "comments": "",
      "providerStatus": "InProgress-HAG Activation-Successful",
      "providerMilestone": "InProgress-HAG Activation-Successful",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}
```

Completed

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "Completed",
      "comments": "",
      "providerStatus": "Completed",
      "providerMilestone": "Completed",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}
```

Use Case - Set 6 Rewiring

- FTTH Rewiring for Mobily/Open Access

WFM

Sample Notification

[Reference \(same as Relocation\)](#)

Open Access

Sample Notification - Dawiyat

[Reference \(same as Relocation\)](#)

Use Case - Set 7 Device Swap

- CPE/HAG/ONT Device Swap

WFM (CPE/HAG)

Sample Notification - OK

```
{
  "eventId": "Event-ORD000000003056",
  "eventTime": "2025-11-02T05:11:45.922Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123457",
      "externalId": "ORD1917819",
      "state": "OK",
      "code": "1000"
    }
  }
}
```

Sample Notification - Ready

```
{
  "eventId": "Event-ORD000000003057",
  "eventTime": "2025-11-02T05:11:50.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123458",
      "externalId": "ORD1917819",
      "state": "Ready",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Acknowledged

```
{
  "eventId": "Event-ORD000000003055",
  "eventTime": "2025-11-02T05:12:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123456",
      "externalId": "ORD1917819",
      "state": "ACKNOWLEDGED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Accepted


```
{
  "eventId": "Event-ORD000000003058",
  "eventTime": "2025-11-02T05:12:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123459",
      "externalId": "ORD1917819",
      "state": "ACCEPTED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Trip Started

```
{
  "eventId": "Event-ORD000000003059",
  "eventTime": "2025-11-02T05:13:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123460",
      "externalId": "ORD1917819",
      "state": "TRIP STARTED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - Customer Premises

```
{
  "eventId": "Event-ORD000000003060",
  "eventTime": "2025-11-02T05:13:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123461",
      "externalId": "ORD1917819",
      "state": "CUSTOMER PREMISES",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - In Work

```
{
  "eventId": "Event-ORD000000003061",
  "eventTime": "2025-11-02T05:14:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123462",
      "externalId": "ORD1917819",
      "state": "IN WORK",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Sample Notification - CPE Installation Completed

```
{
  "eventId": "Event-ORD000000003062",
  "eventTime": "2025-11-02T05:14:30.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123463",
      "externalId": "ORD1917819",
      "state": "Installation Completed",
      "devices": [
        {
          "integrationId": "1-E1B80T8",
          "newSerialNumber": "QAELIFE19923451"
        }
      ]
    },
    "timestamp": "2025-11-02T05:11:45.922Z"
  }
}
```

Sample Notification - Completed

```
{
  "eventId": "Event-ORD000000003065",
  "eventTime": "2025-11-02T05:16:00.000Z",
  "eventType": "workOrderStateChangeNotification",
  "event": {
    "workOrder": {
      "id": "123466",
      "externalId": "ORD1917819",
      "state": "COMPLETED",
      "partition": "VIRTUALVENDOR",
      "region": "CENTER-CENTER_1",
      "vendorName": "VIRTUALVENDOR",
      "engineerId": "MOTTEST03",
      "engineerName": "MOTTEST03",
      "engineerPhone": "+966-56-0019900",
      "odbPort": "343",
      "reasonCode": "0",
      "reasonText": "Successful",
      "comments": "Engineer Comment",
      "timestamp": "2025-11-02T05:11:45.922Z"
    }
  }
}
```

Open Access (ONT)

Note:

1. ITC doesn't send the ONT serial number in the notification.
2. STC/Dawiyat sends the ONT serial number in the notification and not HAG serial number as in the service installation.

Sample Notification - ITC

Create Task

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Create Task, start time is 2025-09-17 17:47:18",
      "orderStatus": "Create Task",
      "comments": "",
      "providerStatus": "Create Task",
      "providerMilestone": "", //not present
      "providerComments": "Create Task, start time is 2025-09-17 17:47:18",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Assigned

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Create Task, start time is 2025-09-17 17:47:18",
      "orderStatus": "Assigned",
      "comments": "",
      "providerStatus": "Assigned",
      "providerMilestone": "",
      "providerComments": "Create Task, start time is 2025-09-17 17:47:18",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Accepted

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Engineer Er.Jaffar.Salim accepts the Task at 2025-09-17 18:46:50",
      "orderStatus": "Accepted",
      "comments": "",
      "providerStatus": "Accepted",
      "providerMilestone": "",
      "providerComments": "Engineer Er.Jaffar.Salim accepts the Task at 2025-09-17 18:46:50",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Set Off

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Engineer Er.Jaffar.Salim starts out at 2025-09-17 19:32:42",
      "orderStatus": "Set Off",
      "comments": "",
      "providerStatus": "Set Off",
      "providerMilestone": "",
      "providerComments": "Engineer Er.Jaffar.Salim starts out at 2025-09-17 19:32:42",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Success

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "1-269526309230",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "New installation with 40m cable old cable ATB cut",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "",
      "providerComments": "New installation with 40m cable old cable ATB cut",
      "serviceAccNum" : "1001269526537281"
    }
  }
}

```

Sample Notification - STC

WO Created in WFMS

```

{
  "eventId": "Event-TF00000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "IN-PROCESS",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "WO Created in WFMS",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : " " //need to ask
    }
  }
}

```

Technician Assignment

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Technician Assignment",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Technician Working

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Technician Working",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Activate ONT

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "F001-MY12345678-1846",
      "lineItemStatus": "READY",
      "description": "Success",
      "orderStatus": "ORDERED",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "Activate ONT",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

TEST_FTTH_LINK

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "STC_CPE_UPDATE",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "ORDERED",
      "providerMilestone": "TEST_FTTH_LINK",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "", //need to ask
      "devices": [
        {
          "integrationId": "",
          "newSerialNumber": "QAELIFE19923451"
        }
      ]
    }
  }
}

```

Closed


```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "I-MY12345678",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "",
      "providerComments": "",
      "orderTransactionNo" : "I-MY12345678",
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Sample Notification - Dawiyat

InProgress

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Broadband Service Install",
      "orderStatus": "InProgress",
      "comments": "",
      "providerStatus": "InProgress",
      "providerMilestone": "InProgress",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //Need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Acknowledged

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "Acknowledged",
      "comments": "",
      "providerStatus": "Acknowledged",
      "providerMilestone": "Acknowledged",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Dispatch

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Dispatch",
      "comments": "",
      "providerStatus": "InProgress-Dispatch",
      "providerMilestone": "InProgress-Dispatch",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Departure

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Departure",
      "comments": "",
      "providerStatus": "InProgress-Departure",
      "providerMilestone": "InProgress-Departure",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

InProgress-Arrival

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-Arrival",
      "comments": "",
      "providerStatus": "InProgress-Arrival",
      "providerMilestone": "InProgress-Arrival",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Serial Number Notification

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "Installation Completed",
      "comments": "",
      "providerStatus": "Installation Completed",
      "providerMilestone": "Installation Completed",
      "providerComments": "",
      "orderTransactionNo" : "",
      "serviceAccNum" : "",
      "devices": [
        {
          "integrationId": "",
          "newSerialNumber": "QAELIFE19923451"
        }
      ]
    }
  }
}

```

InProgress-HAG Activation-Successful

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "InProgress-HAG Activation-Successful",
      "comments": "",
      "providerStatus": "InProgress-HAG Activation-Successful",
      "providerMilestone": "InProgress-HAG Activation-Successful",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}

```

Completed

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "Broadband Service Install",
      "orderStatus": "Completed",
      "comments": "",
      "providerStatus": "Completed",
      "providerMilestone": "Completed",
      "providerComments": "Broadband Service Install",
      "orderTransactionNo" : "1-269535257084", //need to ask
      "serviceAccNum" : "" //need to ask
    }
  }
}
```

Use Case - Set 8 Customer raises issue

- Maintenance Order
 - Mobily (Customer Visit)
 - Open Access (Create/Re-Open SR)

WFM

Sample Notification

[Reference](#)

Open Access

Sample Notification - ITC/STC/Dawiyat (Create/Re-Open SR)

Resolved

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "1-271459437915",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "Resolved",
      "providerMilestone": "",
      "providerComments": "ODB Port Clean",
      "orderTransactionNo" : "",
      "serviceAccNum" : ""
    }
  }
}
```

Rejected

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "1-271459437915",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "Rejected",
      "providerMilestone": "",
      "providerComments": "ODB Port Clean not successful",
      "orderTransactionNo" : "",
      "serviceAccNum" : ""
    }
  }
}
```

Closed

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "",
      "externalId": "1-271459437915",
      "lineItemIdentifier": "",
      "lineItemStatus": "",
      "description": "",
      "orderStatus": "",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "",
      "providerComments": "Case has been closed Successfully.",
      "orderTransactionNo" : "",
      "serviceAccNum" : ""
    }
  }
}
```

Leave

Use Case - Set 1 FTTH Termination

- FTTH service termination

Nokia FlowOne

Sample Notification

[Reference](#)

Open Access

Sample Notification - ITC

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "20250823093424",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Success",
      "comments": "",
      "providerStatus": "Success",
      "providerMilestone": "", //not present
      "providerComments": "Success",
      "orderTransactionNo" : "20250823093424",
      "serviceAccNum" : "1001267389365550"
    }
  }
}

```

Sample Notification - Dawiyat

```

{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "DAW20250917001334",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Broadband Service Termination",
      "orderStatus": "Completed",
      "comments": "",
      "providerStatus": "Completed",
      "providerMilestone": "Completed",
      "providerComments": "Broadband Service Termination",
      "orderTransactionNo" : "OLOCRMN020250926152129",
      "serviceAccNum" : "DAWFTTH00433122"
    }
  }
}

```

Sample Notification - STC

```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "serviceOrderStateChangeNotification",
  "event": {
    "serviceOrder": {
      "funcId": "UPDATE_ORDER",
      "externalId": "O-MY23831670",
      "lineItemIdentifier": "", //not present so blank
      "lineItemStatus": "", //not present so blank
      "description": "Success",
      "orderStatus": "Closed",
      "comments": "",
      "providerStatus": "Closed",
      "providerMilestone": "", //not present
      "providerComments": "",
      "orderTransactionNo" : "O-MY23831670",
      "serviceAccNum" : ""
    }
  }
}
```