

Telflow - TMF 622 Notification Event API Details (TMF 622 Default & Custom)

- [Document History](#)
 - [Version Control](#)
 - [Approved By](#)
- [Introduction](#)
- [Scope](#)
- [Glossary](#)
- [Solution Context](#)
 - [Context Diagram](#)
- [Proposed Solution](#)
 - [Integration Overview](#)
 - [Systems and Integration Details](#)
 - [API Notifications](#)
 - [Telflow Callback URL](#)
 - [Authentication](#)
 - [Get Access Token](#)
 - [Refresh Access Token](#)
 - [Error Codes](#)
 - [Resource Structure Description](#)
 - [Notification](#)
 - [Event](#)
 - [Order](#)
 - [Order State and Order Sub-State](#)
 - [Sample](#)
 - [Request \(Towards SingleView\) - Mobily Infra FTTH Activation](#)
 - [Pending Visit](#)
 - [Installation Completed \(for CPE\)](#)
 - [Provisioning Started](#)
 - [Completed \(for ME\)](#)
 - [Provisioning Completed](#)
 - [Pending UAT](#)
 - [UAT Completed](#)
 - [Pre-Completion](#)
 - [Completed](#)
 - [Request \(Towards SingleView\) - Open Access FTTH Activation](#)
 - [Pending Visit \(for ONT\)](#)
 - [Installation Completed \(for ONT\)](#)
 - [Provisioning Started](#)
 - [Provisioning Completed](#)
 - [Pending Visit \(for ME\)](#)
 - [Completed \(for ME\)](#)
 - [Pre-Completion](#)
 - [Completed](#)
 - [Pre-Cancellation](#)
 - [Cancelled](#)
 - [Acknowledgement Response \(From SingleView\)](#)
 - [Notification Event Template Structure](#)
 - [Notification Event \(From SingleView\)](#)

Document History

Version Control

Version	Date	Company	Author	Description
1.0	20 Nov 2025	CSG	K Babu	Initial Draft

Approved By

Version	Approval Date	Company	Approver	Comments
1.0		CSG		

Introduction

In Mobily, Telflow plays the role of Product Order Manager (POM) orchestrating the orders for FTTH and Fixed Voice service. During order processing, Telflow must notify SingleView the product order status (for specific order state/sub-state) via TMF 622 notifications and the responses are handled asynchronously in Telflow. Unless the notification responses are received from SingleView, the order shall not proceed further in Telflow.

Scope


This document describes the notification event API details that are to be implemented in Telflow.

Glossary

Term	Definition

Solution Context

Context Diagram

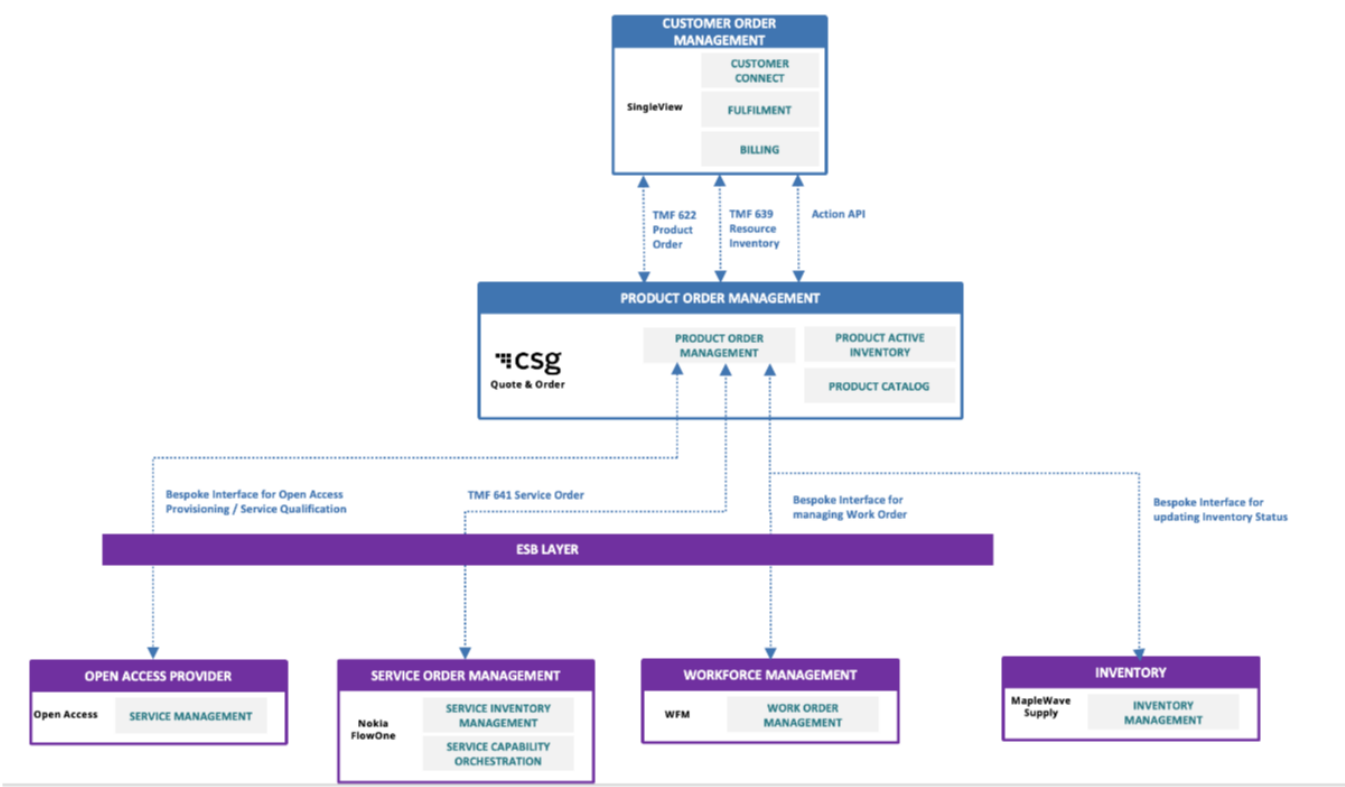

Proposed Solution

Integration Overview

Systems and Integration Details

S.No	System / Application	Integration	Via ESB?
1	SingleView	TMF 622	No

API Notifications

1. A callback URL must be registered as a listener in SingleView to send the notification events to the Telflow.
2. Telflow acknowledges the reception of the notification with the HTTP code 200.
3. REST is the supported interface.

Telflow Callback URL

S.No	System / Application	Callback URL	Method
1	SingleView	https://mobily-dev.live.demo-in.telflow.com/singleViewServicesManagement/v1/notification/	POST

Authentication

The external systems must be authenticated via access token before sending the notification events to Telflow. Following are the details,

Get Access Token

URL	https://<host>/auth/realms/telflow/protocol/openid-connect/token
METHOD	POST

Request

Header:

Body: (Form URL Encoded)

client_id = singleview-system

client_secret = <client secret>

username = mob-sv-admin

password = <password>

grant_type = password

Response

200

```
{
  "access_token": <token>
  "expires_in": 3600,
  "refresh_expires_in": 4500,
  "refresh_token": <refresh_token>
  "token_type": "Bearer",
  "not-before-policy": 0,
  "session_state":
  "scope":
}
```

Refresh Access Token

URL	https://<host>/auth/realms/telflow/protocol/openid-connect/token
METHOD	POST

Request

Header: Body: (Form URL Encoded) client_id = singleview-system client_secret = <client secret> refresh_token = <refresh_token> grant_type = refresh_token
Response
200 <pre>{ "access_token": <token> "expires_in": 3600, "refresh_expires_in": 4500, "refresh_token": <refresh_token> "token_type": "Bearer", "not-before-policy": 0, "session_state": "scope": }</pre>

Below are the details applicable for various environments,

Environment	External System	Client Id	Client Secret	Username	Password
DEV	SingleView				
SIT					
UAT					
PRE-PROD					
PROD					

Error Codes

Following are the error codes that are supported,

HTTP Response Code	Description
200	Success Request was successfully authorised and processed. The relevant entities will be returned in response.
201	Created Request was successfully authorised and processed. Creation of the requested entity has been confirmed and will be returned in response.
202	Accepted Request was successfully authorised, but not necessarily been processed. The latest state of the relevant entity will be returned in response.
204	No Content Request was successfully authorised and processed. No response required.
400	Bad Request Request data fails validation or does not conform to expected format.
401	Unauthorised User has not been authenticated.
403	Forbidden User does not have permission to access the requested resource.

404	Not Found Requested resource does not exist or is unavailable.
405	Method Not Allowed Requested operation is not supported.
500	Internal Server Error An unexpected error has occurred within the system.

Error Response
403 <pre>{ "error": "invalid_grant", "error_description": "Access token is expired" }</pre>

Resource Structure Description

Notification

Resource Name	Key	Mandatory /Optional	Data Type	Description	Supported Values	Sample Values	Assumption /Comment
Notification	eventId	M	String				
	eventTime	O	String				
	eventType	M	String		salesOrderStateChangeNotification	salesOrderStateChangeNotification	
	event	M	Event				

Event

Sub-Resource Name	Key	Mandatory/Optional	Data Type	Description	Supported Values	Sample Values	Assumption/Comment
	<Type of Order>	M	Order	Order Type	salesOrder	salesOrder	

Order

Sub-Resource Name	Key	Mandatory /Optional	Data Type	Description	Supported Values	Sample Values	Assumption /Comment
Order	externalId	M	String	SingleView order Id		342354325	
	id	M	String	Telflow order Id		ORD873287	
	orderState	M	String	Order status		In Progress Provisioning Completed, In Progress UAT Completed, In Progress Pre-Completion, In Progress Pre-Cancellation	
	status	M	String	Action status	Completed, Failed	Completed	

Order State and Order Sub-State

Following are the order states and sub-states that are emitted from Telflow towards SingleView and the corresponding notification IC that are being used by Telflow,

S.No	Order State	Order Sub-State	TMF 622 Default Notification (Sync)	Custom TMF 622 Notification (Async)
1	In Progress	Pending Visit	Y	
2	In Progress	On Hold	Y	

3	In Progress	Pending UAT	Y	
4	In Progress	Feasibility Pending	Y	
5	In Progress	Feasibility Closed	Y	
6	In Progress	Pending	Y	
7	Cancelled	-	Y	
8	In Progress	UAT Completed		Y
9	In Progress	Completed <u>Note:</u> Applicable for limited/certain use cases.		Y
10	In Progress	Provisioning Completed		Y
11	In Progress	Installation Completed <u>Note:</u> Applicable for Open Access use cases.		Y
12	In Progress	Pre-Cancellation		Y
13	In Progress	Pre-Completion		Y

Sample

Request (Towards SingleView) - Mobily Infra FTTH Activation

Pending Visit

```
{
  "eventId": "70bbe199-df57-4972-9c06-e519d9fd3321",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:12:44.846Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Pending Visit",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034087",
          "state": "In Progress|Pending Visit",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034087",
            "href": "/api/v1/inventory/FTTH000000034087",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            },
            "characteristic": [
              {
                "name": "ftthsai",
                "value": "sai1234",
```

```
    "valueType": "string"
  },
  {
    "name": "serviceType",
    "value": "Fiber 300 Postpaid",
    "valueType": "string"
  },
  {
    "name": "feasibilityId",
    "value": "F000123",
    "valueType": "string"
  },
  {
    "name": "infraProvider",
    "value": "MOBILY",
    "valueType": "string"
  },
  {
    "name": "ftthPaymentType",
    "value": "Prepaid",
    "valueType": "string"
  },
  {
    "name": "customerCategory",
    "value": "Regular",
    "valueType": "string"
  },
  {
    "name": "cpeDetails",
    "valueType": "array",
    "value": [
      {
        "name": "cpeName",
        "value": "FTTH CPE Postpaid",
        "valueType": "string"
      },
      {
        "name": "cpeType",
        "value": "Router",
        "valueType": "string"
      },
      {
        "name": "bandwidth",
        "value": "100",
        "valueType": "string"
      },
      {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
      },
      {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
      },
      {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
      },
      {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
      },
      {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
      }
    ]
  }
}
```

```

    ]
  },
  {
    "name": "odbDetails",
    "valueType": "array",
    "value": [
      {
        "name": "odbId",
        "value": "246287462104",
        "valueType": "string"
      },
      {
        "name": "region",
        "value": "Central",
        "valueType": "string"
      },
      {
        "name": "geoCoordinates",
        "valueType": "object",
        "value": {
          "latitude": "24.710932",
          "longitude": "46.685435"
        }
      }
    ]
  }
]
},
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "cpeActionId",
        "value": "0",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    }
  ],
  {

```



```

        "name": "surname",
        "value": "A.P",
        "valueType": "string"
    },
    {
        "name": "customerId",
        "value": "23432453",
        "valueType": "string"
    },
    {
        "name": "customerName",
        "value": "Fajarisma",
        "valueType": "string"
    },
    {
        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "address",
        "valueType": "object",
        "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
        }
    },
    {
        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "f.putri@mobily.com.sa",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
]
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
}
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeWorkOrderId",

```

```

        "value": "1-cpe-000000002808420260129101242",
        "valueType": "string"
    }
}
],
{
    "name": "meshWorkOrderDetails",
    "valueType": "array"
}
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
        "@type": "Product",
        "id": "ME000000003663",
        "href": "/api/v1/inventory/ME000000003663",
        "quantity": "1",
        "productSpecification": {
            "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
            "name": "Mesh Extender",
            "version": "1.0"
        }
    },
    "characteristic": [
        {
            "name": "meshDetails",
            "valueType": "array",
            "value": [
                {
                    "name": "noOfDevices",
                    "value": "3",
                    "valueType": "string"
                },
                {
                    "name": "meshExtender1",
                    "valueType": "object",
                    "value": {
                        "integrationId1": "3523523"
                    }
                },
                {
                    "name": "meshExtender2",
                    "valueType": "object",
                    "value": {
                        "integrationId2": "789679"
                    }
                },
                {
                    "name": "meshExtender3",
                    "valueType": "object",
                    "value": {
                        "integrationId3": "2547679"
                    }
                }
            ]
        }
    ]
}
],
"relatedParty": [
    {
        "@type": "relatedParty",

```

```

        "@referredType": "Consumer",
        "id": "23432453",
        "name": "Fajarisma",
        "role": "CommerciallyResponsible"
    }
}
}
}
}

```

Installation Completed (for CPE)

```

{
  "eventId": "c6855fd0-5b19-4608-b4fd-30f8aba70fc5",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:15:13.481Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Installation Completed",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034087",
          "state": "In Progress|Installation Completed",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034087",
            "href": "/api/v1/inventory/FTTH000000034087",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            },
            },
          "characteristic": [
            {
              "name": "ftthsai",
              "value": "sai1234",
              "valueType": "string"
            },
            {
              "name": "serviceType",
              "value": "Fiber 300 Postpaid",
              "valueType": "string"
            },
            {
              "name": "feasibilityId",
              "value": "F000123",
              "valueType": "string"
            },
            {
              "name": "infraProvider",
              "value": "MOBILY",
              "valueType": "string"
            },
          ],
        }
      ]
    }
  }
}

```

```
{
  "name": "ftthPaymentType",
  "value": "Prepaid",
  "valueType": "string"
},
{
  "name": "customerCategory",
  "value": "Regular",
  "valueType": "string"
},
{
  "name": "cpeDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeName",
      "value": "FTTH CPE Postpaid",
      "valueType": "string"
    },
    {
      "name": "cpeType",
      "value": "Router",
      "valueType": "string"
    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    },
    {
      "name": "integrationId",
      "value": "124214",
      "valueType": "string"
    },
    {
      "name": "sellPartnerId",
      "value": "1234",
      "valueType": "string"
    },
    {
      "name": "cpeInstallDate",
      "value": "2026-09-24T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumber",
      "value": "cpeserial-1111",
      "valueType": "string"
    },
    {
      "name": "skipCpeDiscovery",
      "value": "false",
      "valueType": "string"
    }
  ]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    }
  ]
}
```

```

        "name": "region",
        "value": "Central",
        "valueType": "string"
    },
    {
        "name": "geoCoordinates",
        "valueType": "object",
        "value": {
            "latitude": "24.710932",
            "longitude": "46.685435"
        }
    }
]
}
],
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",
        "value": [
            {
                "name": "meActionId",
                "value": "20251225202110",
                "valueType": "string"
            },
            {
                "name": "cpeActionId",
                "value": "20250324123105",
                "valueType": "string"
            }
        ]
    }
],
{
    "name": "customerDetails",
    "valueType": "array",
    "value": [
        {
            "name": "can",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "san",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "vip",
            "value": "false",
            "valueType": "string"
        },
        {
            "name": "segment",
            "value": "Consumer",
            "valueType": "string"
        }
    ],
    {
        "name": "surname",
        "value": "A.P",
        "valueType": "string"
    },
    {
        "name": "customerId",
        "value": "23432453",

```

```

        "valueType": "string"
    },
    {
        "name": "customerName",
        "value": "Fajarisma",
        "valueType": "string"
    },
    {
        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "address",
        "valueType": "object",
        "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
        }
    },
    {
        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "f.putri@mobily.com.sa",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
]
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
}
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeRegion",
            "value": "CENTER-CENTER_1_IW",
            "valueType": "string"
        },
        {
            "name": "cpeVendor",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        }
    ]
}

```

```

    },
    {
      "name": "cpePartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    },
    {
      "name": "cpeTaskStatus",
      "value": "Installation Completed",
      "valueType": "string"
    },
    {
      "name": "cpeWorkOrderId",
      "value": "1-cpe-00000002808420260129101242",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerName",
      "value": "MOTTEST03_IW",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerPhone",
      "value": "+966-56-0019900",
      "valueType": "string"
    }
  ]
},
{
  "name": "meshWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "meshWorkOrderId",
      "value": "2-me-0000000280842026012910133",
      "valueType": "string"
    }
  ]
}
],
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},
{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003663",
    "href": "/api/v1/inventory/ME000000003663",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [

```

```

        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        },
        {
          "name": "meshExtender1",
          "valueType": "object",
          "value": {
            "integrationId1": "3523523"
          }
        },
        {
          "name": "meshExtender2",
          "valueType": "object",
          "value": {
            "integrationId2": "789679"
          }
        },
        {
          "name": "meshExtender3",
          "valueType": "object",
          "value": {
            "integrationId3": "2547679"
          }
        }
      ]
    }
  ],
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible"
    }
  ]
}

```

Provisioning Started

```

{
  "eventId": "6087dfa9-59a9-4241-960a-8efa045dfedd",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:15:18.554Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Provisioning Started",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",

```



```
"id": "FTTH000000034087",
"state": "In Progress|Provisioning Started",
"product": {
  "@type": "Product",
  "id": "FTTH000000034087",
  "href": "/api/v1/inventory/FTTH000000034087",
  "name": "FTTH - FiberAdvanced 100 Prepaid",
  "status": "Pending",
  "quantity": "1",
  "productSpecification": {
    "id": "MOB-FTTH-SPECIFICATION-01-00",
    "name": "FTTH",
    "version": "1.0"
  },
},
"characteristic": [
  {
    "name": "ftthsai",
    "value": "sai1234",
    "valueType": "string"
  },
  {
    "name": "serviceType",
    "value": "Fiber 300 Postpaid",
    "valueType": "string"
  },
  {
    "name": "feasibilityId",
    "value": "F000123",
    "valueType": "string"
  },
  {
    "name": "infraProvider",
    "value": "MOBILY",
    "valueType": "string"
  },
  {
    "name": "ftthPaymentType",
    "value": "Prepaid",
    "valueType": "string"
  },
  {
    "name": "customerCategory",
    "value": "Regular",
    "valueType": "string"
  },
  {
    "name": "cpeDetails",
    "valueType": "array",
    "value": [
      {
        "name": "cpeSku",
        "value": "MD.MBDC.TBLT.APPL.10312",
        "valueType": "string"
      },
      {
        "name": "cpeName",
        "value": "FTTH CPE Postpaid",
        "valueType": "string"
      },
      {
        "name": "cpeType",
        "value": "Router",
        "valueType": "string"
      },
      {
        "name": "cpeModel",
        "value": "H155-381",
        "valueType": "string"
      },
      {
        "name": "bandwidth",
```

```

        "value": "100",
        "valueType": "string"
    },
    {
        "name": "cpeVendor",
        "value": "Huawei",
        "valueType": "string"
    },
    {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
    },
    {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
    },
    {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
        {
            "name": "region",
            "value": "Central",
            "valueType": "string"
        },
        {
            "name": "geoCoordinates",
            "valueType": "object",
            "value": {
                "latitude": "24.710932",
                "longitude": "46.685435"
            }
        }
    ]
}

```

```

    }
  ]
}
],
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "meActionId",
        "value": "20251225202110",
        "valueType": "string"
      },
      {
        "name": "cpeActionId",
        "value": "20250324123105",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    }
  ]
}

```

```

    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "f.putri@mobily.com.sa",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ]
},
{
  "name": "appointmentDetails",
  "valueType": "array",
  "value": [
    {
      "name": "slotId",
      "value": "5",
      "valueType": "string"
    },
    {
      "name": "appointmentId",
      "value": "APPT-1003",
      "valueType": "string"
    },
    {
      "name": "appointmentEndDate",
      "value": "2026-01-31T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "appointmentStartDate",
      "value": "2026-01-29T10:11:24.000Z",
      "valueType": "string"
    }
  ]
},
{
  "name": "cpeWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeRegion",
      "value": "CENTER-CENTER_1_IW",
      "valueType": "string"
    },
    {
      "name": "cpeVendor",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "cpePartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    }
  ]
},

```

```

        {
            "name": "cpeTaskStatus",
            "value": "Installation Completed",
            "valueType": "string"
        },
        {
            "name": "cpeWorkOrderId",
            "value": "1-cpe-00000002808420260129101242",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerName",
            "value": "MOTTEST03_IW",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerPhone",
            "value": "+966-56-0019900",
            "valueType": "string"
        }
    ]
},
{
    "name": "meshWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "meshWorkOrderId",
            "value": "2-me-0000000280842026012910133",
            "valueType": "string"
        }
    ]
}
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
        "@type": "Product",
        "id": "ME000000003663",
        "href": "/api/v1/inventory/ME000000003663",
        "quantity": "1",
        "productSpecification": {
            "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
            "name": "Mesh Extender",
            "version": "1.0"
        }
    },
    "characteristic": [
        {
            "name": "meshDetails",
            "valueType": "array",
            "value": [
                {
                    "name": "noOfDevices",
                    "value": "3",
                    "valueType": "string"
                }
            ],
            {
                "name": "meshExtender1",
                "valueType": "object",
                "value": {
                    "integrationId1": "3523523"
                }
            }
        ]
    ]
}

```

```

    },
    {
      "name": "meshExtender2",
      "valueType": "object",
      "value": {
        "integrationId2": "789679"
      }
    },
    {
      "name": "meshExtender3",
      "valueType": "object",
      "value": {
        "integrationId3": "2547679"
      }
    }
  ]
}
]
}
],
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible"
  }
]
}
}
}

```

Completed (for ME)

```

{
  "eventId": "f39c0775-9c58-428a-b11c-a28ca3e133c7",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:16:45.747Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Completed",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034087",
          "state": "In Progress|Completed",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034087",
            "href": "/api/v1/inventory/FTTH000000034087",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",

```

```
"name": "FTTH",
"version": "1.0"
},
"characteristic": [
  {
    "name": "ftthsai",
    "value": "sai1234",
    "valueType": "string"
  },
  {
    "name": "serviceType",
    "value": "Fiber 300 Postpaid",
    "valueType": "string"
  },
  {
    "name": "feasibilityId",
    "value": "F000123",
    "valueType": "string"
  },
  {
    "name": "infraProvider",
    "value": "MOBILY",
    "valueType": "string"
  },
  {
    "name": "ftthPaymentType",
    "value": "Prepaid",
    "valueType": "string"
  },
  {
    "name": "customerCategory",
    "value": "Regular",
    "valueType": "string"
  },
  {
    "name": "cpeDetails",
    "valueType": "array",
    "value": [
      {
        "name": "cpeSku",
        "value": "MD.MBDC.TBLT.APPL.10312",
        "valueType": "string"
      },
      {
        "name": "cpeName",
        "value": "FTTH CPE Postpaid",
        "valueType": "string"
      },
      {
        "name": "cpeType",
        "value": "Router",
        "valueType": "string"
      },
      {
        "name": "cpeModel",
        "value": "H155-381",
        "valueType": "string"
      },
      {
        "name": "bandwidth",
        "value": "100",
        "valueType": "string"
      },
      {
        "name": "cpeVendor",
        "value": "Huawei",
        "valueType": "string"
      },
      {
        "name": "qosProfile",
        "value": "FiberAdvanced",
```

```

        "valueType": "string"
      },
      {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
      },
      {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
      },
      {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
      },
      {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
      },
      {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
      },
      {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
      },
      {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
      }
    ]
  },
  {
    "name": "odbDetails",
    "valueType": "array",
    "value": [
      {
        "name": "odbId",
        "value": "246287462104",
        "valueType": "string"
      },
      {
        "name": "region",
        "value": "Central",
        "valueType": "string"
      },
      {
        "name": "geoCoordinates",
        "valueType": "object",
        "value": {
          "latitude": "24.710932",
          "longitude": "46.685435"
        }
      }
    ]
  }
]
},
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},

```



```
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "meActionId",
        "value": "20251225202110",
        "valueType": "string"
      },
      {
        "name": "cpeActionId",
        "value": "20250324123105",
        "valueType": "string"
      }
    ]
  },
  {
    "name": "customerDetails",
    "valueType": "array",
    "value": [
      {
        "name": "can",
        "value": "23432453",
        "valueType": "string"
      },
      {
        "name": "san",
        "value": "23432453",
        "valueType": "string"
      },
      {
        "name": "vip",
        "value": "false",
        "valueType": "string"
      },
      {
        "name": "segment",
        "value": "Consumer",
        "valueType": "string"
      },
      {
        "name": "surname",
        "value": "A.P",
        "valueType": "string"
      },
      {
        "name": "customerId",
        "value": "23432453",
        "valueType": "string"
      },
      {
        "name": "customerName",
        "value": "Fajarisma",
        "valueType": "string"
      },
      {
        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
      },
      {
        "name": "address",
        "valueType": "object",
        "value": {
          "zipCode": "6789",
          "streetName": "Whitefield Road",
          "buildingName": "Alturus"
        }
      }
    ]
  },
  {

```

```

        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "f.putri@mobily.com.sa",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
}
],
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeRegion",
            "value": "CENTER-CENTER_1_IW",
            "valueType": "string"
        },
        {
            "name": "cpeVendor",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        },
        {
            "name": "cpePartition",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerId",
            "value": "EnggInWork",
            "valueType": "string"
        },
        {
            "name": "cpeTaskStatus",
            "value": "Installation Completed",
            "valueType": "string"
        },
        {
            "name": "cpeWorkOrderId",
            "value": "1-cpe-00000002808420260129101242",
            "valueType": "string"
        }
    ],
    {

```

```

        "name": "cpeEngineerName",
        "value": "MOTTEST03_IW",
        "valueType": "string"
    },
    {
        "name": "cpeEngineerPhone",
        "value": "+966-56-0019900",
        "valueType": "string"
    }
]
},
{
    "name": "meshWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "meshRegion",
            "value": "CENTER-CENTER_1_IW",
            "valueType": "string"
        },
        {
            "name": "meshVendor",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        },
        {
            "name": "meshPartition",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        },
        {
            "name": "meshEngineerId",
            "value": "EnggInWork",
            "valueType": "string"
        },
        {
            "name": "meshTaskStatus",
            "value": "Installation Completed",
            "valueType": "string"
        },
        {
            "name": "meshWorkOrderId",
            "value": "2-me-00000000280842026012910133",
            "valueType": "string"
        },
        {
            "name": "meshEngineerName",
            "value": "MOTTEST03_IW",
            "valueType": "string"
        }
    ]
}
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
        "@type": "Product",
        "id": "ME000000003663",
        "href": "/api/v1/inventory/ME000000003663",
        "quantity": "1",
        "productSpecification": {
            "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",

```



```
"category": "FTTH",
"orderDate": "2026-01-29T10:11:24.012532Z",
"priority": "50",
"state": "In Progress|Provisioning Completed",
"href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD0000000028084",
"creator": "80099310",
"productOrderItem": [
  {
    "@type": "productOrderItem",
    "action": "add",
    "ftthSubAction": "Activate",
    "id": "FTTH000000034087",
    "state": "In Progress|Provisioning Completed",
    "product": {
      "@type": "Product",
      "id": "FTTH000000034087",
      "href": "/api/v1/inventory/FTTH000000034087",
      "name": "FTTH - FiberAdvanced 100 Prepaid",
      "status": "Pending",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-SPECIFICATION-01-00",
        "name": "FTTH",
        "version": "1.0"
      },
    },
    "characteristic": [
      {
        "name": "ftthsai",
        "value": "sai1234",
        "valueType": "string"
      },
      {
        "name": "serviceType",
        "value": "Fiber 300 Postpaid",
        "valueType": "string"
      },
      {
        "name": "feasibilityId",
        "value": "F000123",
        "valueType": "string"
      },
      {
        "name": "infraProvider",
        "value": "MOBILY",
        "valueType": "string"
      },
      {
        "name": "ftthPaymentType",
        "value": "Prepaid",
        "valueType": "string"
      },
      {
        "name": "customerCategory",
        "value": "Regular",
        "valueType": "string"
      },
      {
        "name": "cpeDetails",
        "valueType": "array",
        "value": [
          {
            "name": "cpeSku",
            "value": "MD.MBDC.TBLT.APPL.10312",
            "valueType": "string"
          },
          {
            "name": "cpeName",
            "value": "FTTH CPE Postpaid",
            "valueType": "string"
          }
        ]
      }
    ]
  }
]
```

```

        "name": "cpeType",
        "value": "Router",
        "valueType": "string"
    },
    {
        "name": "cpeModel",
        "value": "H155-381",
        "valueType": "string"
    },
    {
        "name": "bandwidth",
        "value": "100",
        "valueType": "string"
    },
    {
        "name": "cpeVendor",
        "value": "Huawei",
        "valueType": "string"
    },
    {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
    },
    {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
    },
    {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
    ],
}

```

```

        "name": "region",
        "value": "Central",
        "valueType": "string"
    },
    {
        "name": "geoCoordinates",
        "valueType": "object",
        "value": {
            "latitude": "24.710932",
            "longitude": "46.685435"
        }
    }
]
}
],
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",
        "value": [
            {
                "name": "meActionId",
                "value": "20251225202110",
                "valueType": "string"
            },
            {
                "name": "cpeActionId",
                "value": "20250324123105",
                "valueType": "string"
            }
        ]
    }
],
{
    "name": "customerDetails",
    "valueType": "array",
    "value": [
        {
            "name": "can",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "san",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "vip",
            "value": "false",
            "valueType": "string"
        },
        {
            "name": "segment",
            "value": "Consumer",
            "valueType": "string"
        }
    ],
    {
        "name": "surname",
        "value": "A.P",
        "valueType": "string"
    },
    {
        "name": "customerId",
        "value": "23432453",

```

```

        "valueType": "string"
    },
    {
        "name": "customerName",
        "value": "Fajarisma",
        "valueType": "string"
    },
    {
        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "address",
        "valueType": "object",
        "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
        }
    },
    {
        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "f.putri@mobily.com.sa",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
]
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
}
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeRegion",
            "value": "CENTER-CENTER_1_IW",
            "valueType": "string"
        },
        {
            "name": "cpeVendor",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        }
    ]
}

```



```

    },
    {
      "name": "cpePartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    },
    {
      "name": "cpeTaskStatus",
      "value": "Installation Completed",
      "valueType": "string"
    },
    {
      "name": "cpeWorkOrderId",
      "value": "1-cpe-00000002808420260129101242",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerName",
      "value": "MOTTEST03_IW",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerPhone",
      "value": "+966-56-0019900",
      "valueType": "string"
    }
  ]
},
{
  "name": "meshWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "meshRegion",
      "value": "CENTER-CENTER_1_IW",
      "valueType": "string"
    },
    {
      "name": "meshVendor",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshPartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    },
    {
      "name": "meshTaskStatus",
      "value": "Installation Completed",
      "valueType": "string"
    },
    {
      "name": "meshWorkOrderId",
      "value": "2-me-0000000280842026012910133",
      "valueType": "string"
    },
    {
      "name": "meshEngineerName",
      "value": "MOTTEST03_IW",
      "valueType": "string"
    }
  ]
}

```

```

    }
  ]
}
],
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},
{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003663",
    "href": "/api/v1/inventory/ME000000003663",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [
        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        },
        {
          "name": "meshExtender1",
          "valueType": "object",
          "value": {
            "serialNumber1": "meSerial-1111",
            "integrationId1": "3523523"
          }
        },
        {
          "name": "meshExtender2",
          "valueType": "object",
          "value": {
            "serialNumber2": "meSerial-2222",
            "integrationId2": "789679"
          }
        },
        {
          "name": "meshExtender3",
          "valueType": "object",
          "value": {
            "serialNumber3": "meSerial-3333",
            "integrationId3": "2547679"
          }
        }
      ]
    }
  ]
}
],
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",

```

```

        "role": "CommerciallyResponsible",
        "href": "/api/v1/parties/PTY000000000320"
    }
}
}
}
}

```

Pending UAT

```

{
  "eventId": "1cb8f043-118b-4da1-b005-73d3838c2804",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:19:48.513Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Pending UAT",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034087",
          "state": "In Progress|Pending UAT",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034087",
            "href": "/api/v1/inventory/FTTH000000034087",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            }
          },
          "characteristic": [
            {
              "name": "ftthsaai",
              "value": "sai1234",
              "valueType": "string"
            },
            {
              "name": "serviceType",
              "value": "Fiber 300 Postpaid",
              "valueType": "string"
            },
            {
              "name": "feasibilityId",
              "value": "F000123",
              "valueType": "string"
            },
            {
              "name": "infraProvider",
              "value": "MOBILY",
              "valueType": "string"
            },
            {
              "name": "ftthPaymentType",

```

```
"value": "Prepaid",
"valueType": "string"
},
{
  "name": "customerCategory",
  "value": "Regular",
  "valueType": "string"
},
{
  "name": "cpeDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeSku",
      "value": "MD.MBDC.TBLT.APPL.10312",
      "valueType": "string"
    },
    {
      "name": "cpeName",
      "value": "FTTH CPE Postpaid",
      "valueType": "string"
    },
    {
      "name": "cpeType",
      "value": "Router",
      "valueType": "string"
    },
    {
      "name": "cpeModel",
      "value": "H155-381",
      "valueType": "string"
    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "cpeVendor",
      "value": "Huawei",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    },
    {
      "name": "integrationId",
      "value": "124214",
      "valueType": "string"
    },
    {
      "name": "sellPartnerId",
      "value": "1234",
      "valueType": "string"
    },
    {
      "name": "cpeInstallDate",
      "value": "2026-09-24T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "cpeMacAddress1",
      "value": "a45e.609f.3b2c",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumber",
      "value": "cpeserial-1111",
      "valueType": "string"
    }
  ]
}
```

```

    },
    {
      "name": "skipCpeDiscovery",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumberHex",
      "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
      "valueType": "string"
    }
  ]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    },
    {
      "name": "geoCoordinates",
      "valueType": "object",
      "value": {
        "latitude": "24.710932",
        "longitude": "46.685435"
      }
    }
  ]
}
],
},
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "meActionId",
        "value": "20251225202110",
        "valueType": "string"
      },
      {
        "name": "cpeActionId",
        "value": "20250324123105",
        "valueType": "string"
      }
    ]
  }
],
},
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    }
  ]
},

```

```

    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "f.putri@mobily.com.sa",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ],
  {
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
      {
        "name": "slotId",
        "value": "5",
        "valueType": "string"
      },
      {
        "name": "appointmentId",
        "value": "APPT-1003",
        "valueType": "string"
      }
    ],
    {
      "name": "appointmentEndDate",

```

```

        "value": "2026-01-31T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "appointmentStartDate",
        "value": "2026-01-29T10:11:24.000Z",
        "valueType": "string"
    }
]
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeRegion",
            "value": "CENTER-CENTER_1_IW",
            "valueType": "string"
        },
        {
            "name": "cpeVendor",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        },
        {
            "name": "cpePartition",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerId",
            "value": "EnggInWork",
            "valueType": "string"
        },
        {
            "name": "cpeTaskStatus",
            "value": "Installation Completed",
            "valueType": "string"
        },
        {
            "name": "cpeWorkOrderId",
            "value": "1-cpe-00000002808420260129101242",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerName",
            "value": "MOTTEST03_IW",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerPhone",
            "value": "+966-56-0019900",
            "valueType": "string"
        }
    ]
},
{
    "name": "meshWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "meshRegion",
            "value": "CENTER-CENTER_1_IW",
            "valueType": "string"
        },
        {
            "name": "meshVendor",
            "value": "VIRTUALVENDOR_IW",
            "valueType": "string"
        }
    ]
}

```



```

        "integrationId2": "789679"
      }
    },
    {
      "name": "meshExtender3",
      "valueType": "object",
      "value": {
        "serialNumber3": "meSerial-3333",
        "integrationId3": "2547679"
      }
    }
  ]
}
],
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible"
  }
]
}
}
}

```

UAT Completed

```

{
  "eventId": "c60b1b1c-0737-4f8f-a3ab-76b280aa4fa9",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:20:24.360Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|UAT Completed",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034087",
          "state": "In Progress|UAT Completed",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034087",
            "href": "/api/v1/inventory/FTTH000000034087",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            }
          },
          "characteristic": [

```

```
{
  "name": "ftthsai",
  "value": "sai1234",
  "valueType": "string"
},
{
  "name": "serviceType",
  "value": "Fiber 300 Postpaid",
  "valueType": "string"
},
{
  "name": "feasibilityId",
  "value": "F000123",
  "valueType": "string"
},
{
  "name": "infraProvider",
  "value": "MOBILY",
  "valueType": "string"
},
{
  "name": "ftthPaymentType",
  "value": "Prepaid",
  "valueType": "string"
},
{
  "name": "customerCategory",
  "value": "Regular",
  "valueType": "string"
},
{
  "name": "cpeDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeSku",
      "value": "MD.MBDC.TBLT.APPL.10312",
      "valueType": "string"
    },
    {
      "name": "cpeName",
      "value": "FTTH CPE Postpaid",
      "valueType": "string"
    },
    {
      "name": "cpeType",
      "value": "Router",
      "valueType": "string"
    },
    {
      "name": "cpeModel",
      "value": "H155-381",
      "valueType": "string"
    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "cpeVendor",
      "value": "Huawei",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    }
  ],
  "name": "integrationId",
```

```

        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
    },
    {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
        {
            "name": "region",
            "value": "Central",
            "valueType": "string"
        },
        {
            "name": "geoCoordinates",
            "valueType": "object",
            "value": {
                "latitude": "24.710932",
                "longitude": "46.685435"
            }
        }
    ]
}
],
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",

```

```
"value": [
  {
    "name": "meActionId",
    "value": "20251225202110",
    "valueType": "string"
  },
  {
    "name": "cpeActionId",
    "value": "20250324123105",
    "valueType": "string"
  }
]
},
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "f.putri@mobily.com.sa",
```

```

        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
    }
}
],
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeRegion",
            "value": "VIC_Prov",
            "valueType": "string"
        },
        {
            "name": "cpeVendor",
            "value": "ventorMob_Prov",
            "valueType": "string"
        },
        {
            "name": "cpeComments",
            "value": "CPE Installation Successful",
            "valueType": "string"
        },
        {
            "name": "cpePartition",
            "value": "VIRTUALVENDOR_Prov",
            "valueType": "string"
        },
        {
            "name": "cpeEngineerId",
            "value": "mob-engg-1_Prov",
            "valueType": "string"
        },
        {
            "name": "cpeReasonCode",
            "value": "0",
            "valueType": "string"
        },
        {
            "name": "cpeReasonText",
            "value": "CPE Installation Completed",
            "valueType": "string"
        }
    ]
},

```

```

    {
      "name": "cpeTaskStatus",
      "value": "Completed",
      "valueType": "string"
    },
    {
      "name": "cpeWorkOrderId",
      "value": "1-cpe-00000002808420260129101242",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerName",
      "value": "enggAndy_Prov",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerPhone",
      "value": "+966-56-0019900",
      "valueType": "string"
    }
  ]
},
{
  "name": "meshWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "meshRegion",
      "value": "CENTER-CENTER_1_IW",
      "valueType": "string"
    },
    {
      "name": "meshVendor",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshPartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    },
    {
      "name": "meshTaskStatus",
      "value": "Installation Completed",
      "valueType": "string"
    },
    {
      "name": "meshWorkOrderId",
      "value": "2-me-0000000280842026012910133",
      "valueType": "string"
    },
    {
      "name": "meshEngineerName",
      "value": "MOTTEST03_IW",
      "valueType": "string"
    }
  ]
}
],
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},

```

```

{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003663",
    "href": "/api/v1/inventory/ME000000003663",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [
        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        },
        {
          "name": "meshExtender1",
          "valueType": "object",
          "value": {
            "serialNumber1": "meSerial-1111",
            "integrationId1": "3523523"
          }
        },
        {
          "name": "meshExtender2",
          "valueType": "object",
          "value": {
            "serialNumber2": "meSerial-2222",
            "integrationId2": "789679"
          }
        },
        {
          "name": "meshExtender3",
          "valueType": "object",
          "value": {
            "serialNumber3": "meSerial-3333",
            "integrationId3": "2547679"
          }
        }
      ]
    }
  ],
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible",
      "href": "/api/v1/parties/PTY00000000320"
    }
  ]
}

```

```

{
  "eventId": "c2d42f18-e66a-47d2-b4b3-7b085d1ccafe",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:23:19.863Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Pre-Completion",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034087",
          "state": "In Progress|Pre-Completion",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034087",
            "href": "/api/v1/inventory/FTTH000000034087",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            }
          },
          "characteristic": [
            {
              "name": "ftthsai",
              "value": "sai1234",
              "valueType": "string"
            },
            {
              "name": "serviceType",
              "value": "Fiber 300 Postpaid",
              "valueType": "string"
            },
            {
              "name": "feasibilityId",
              "value": "F000123",
              "valueType": "string"
            },
            {
              "name": "infraProvider",
              "value": "MOBILY",
              "valueType": "string"
            },
            {
              "name": "ftthPaymentType",
              "value": "Prepaid",
              "valueType": "string"
            },
            {
              "name": "customerCategory",
              "value": "Regular",
              "valueType": "string"
            },
            {
              "name": "cpeDetails",
              "valueType": "array",

```



```
"value": [  
  {  
    "name": "cpeSku",  
    "value": "MD.MBDC.TBLT.APPL.10312",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeName",  
    "value": "FTTH CPE Postpaid",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeType",  
    "value": "Router",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeModel",  
    "value": "H155-381",  
    "valueType": "string"  
  },  
  {  
    "name": "bandwidth",  
    "value": "100",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeVendor",  
    "value": "Huawei",  
    "valueType": "string"  
  },  
  {  
    "name": "qosProfile",  
    "value": "FiberAdvanced",  
    "valueType": "string"  
  },  
  {  
    "name": "integrationId",  
    "value": "124214",  
    "valueType": "string"  
  },  
  {  
    "name": "sellPartnerId",  
    "value": "1234",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeInstallDate",  
    "value": "2026-09-24T10:11:24.000Z",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeMacAddress1",  
    "value": "a45e.609f.3b2c",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeSerialNumber",  
    "value": "cpeserial-1111",  
    "valueType": "string"  
  },  
  {  
    "name": "skipCpeDiscovery",  
    "value": "false",  
    "valueType": "string"  
  },  
  {  
    "name": "cpeSerialNumberHex",  
    "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",  
    "valueType": "string"  
  }  
]
```

```

    ]
  },
  {
    "name": "odbDetails",
    "valueType": "array",
    "value": [
      {
        "name": "odbId",
        "value": "246287462104",
        "valueType": "string"
      },
      {
        "name": "region",
        "value": "Central",
        "valueType": "string"
      },
      {
        "name": "geoCoordinates",
        "valueType": "object",
        "value": {
          "latitude": "24.710932",
          "longitude": "46.685435"
        }
      }
    ]
  }
]
},
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "meActionId",
        "value": "20251225202110",
        "valueType": "string"
      },
      {
        "name": "cpeActionId",
        "value": "20250324123105",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    }
  ],
  {

```

```

        "name": "segment",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "surname",
        "value": "A.P",
        "valueType": "string"
    },
    {
        "name": "customerId",
        "value": "23432453",
        "valueType": "string"
    },
    {
        "name": "customerName",
        "value": "Fajarisma",
        "valueType": "string"
    },
    {
        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "address",
        "valueType": "object",
        "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
        }
    },
    {
        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "f.putri@mobily.com.sa",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
]
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
}
],
{

```

```

"name": "cpeWorkOrderDetails",
"valueType": "array",
"value": [
  {
    "name": "cpeRegion",
    "value": "VIC_Prov",
    "valueType": "string"
  },
  {
    "name": "cpeVendor",
    "value": "ventorMob_Prov",
    "valueType": "string"
  },
  {
    "name": "cpeComments",
    "value": "CPE Installation Successful",
    "valueType": "string"
  },
  {
    "name": "cpePartition",
    "value": "VIRTUALVENDOR_Prov",
    "valueType": "string"
  },
  {
    "name": "cpeEngineerId",
    "value": "mob-engg-1_Prov",
    "valueType": "string"
  },
  {
    "name": "cpeReasonCode",
    "value": "0",
    "valueType": "string"
  },
  {
    "name": "cpeReasonText",
    "value": "CPE Installation Completed",
    "valueType": "string"
  },
  {
    "name": "cpeTaskStatus",
    "value": "Completed",
    "valueType": "string"
  },
  {
    "name": "cpeWorkOrderId",
    "value": "1-cpe-00000002808420260129101242",
    "valueType": "string"
  },
  {
    "name": "cpeEngineerName",
    "value": "enggAndy_Prov",
    "valueType": "string"
  },
  {
    "name": "cpeEngineerPhone",
    "value": "+966-56-0019900",
    "valueType": "string"
  }
]
},
{
  "name": "meshWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "meshRegion",
      "value": "CENTER-CENTER_1_IW",
      "valueType": "string"
    },
    {
      "name": "meshVendor",

```

```

        "value": "VIRTUALVENDOR_IW",
        "valueType": "string"
    },
    {
        "name": "meshComments",
        "value": "Mesh Installation Successful",
        "valueType": "string"
    },
    {
        "name": "meshPartition",
        "value": "VIRTUALVENDOR_IW",
        "valueType": "string"
    },
    {
        "name": "meshEngineerId",
        "value": "EnggInWork",
        "valueType": "string"
    },
    {
        "name": "meshReasonCode",
        "value": "0",
        "valueType": "string"
    },
    {
        "name": "meshReasonText",
        "value": "Mesh Installation Completed",
        "valueType": "string"
    },
    {
        "name": "meshTaskStatus",
        "value": "Installation Completed",
        "valueType": "string"
    },
    {
        "name": "meshWorkOrderId",
        "value": "2-me-00000000280842026012910133",
        "valueType": "string"
    },
    {
        "name": "meshEngineerName",
        "value": "MOTTEST03_IW",
        "valueType": "string"
    }
    ]
}
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
        "@type": "Product",
        "id": "ME000000003663",
        "href": "/api/v1/inventory/ME000000003663",
        "quantity": "1",
        "productSpecification": {
            "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
            "name": "Mesh Extender",
            "version": "1.0"
        },
    },
    "characteristic": [
        {
            "name": "meshDetails",
            "valueType": "array",

```

```

    "value": [
      {
        "name": "noOfDevices",
        "value": "3",
        "valueType": "string"
      },
      {
        "name": "meshExtender1",
        "valueType": "object",
        "value": {
          "serialNumber1": "meSerial-1111",
          "integrationId1": "3523523"
        }
      },
      {
        "name": "meshExtender2",
        "valueType": "object",
        "value": {
          "serialNumber2": "meSerial-2222",
          "integrationId2": "789679"
        }
      },
      {
        "name": "meshExtender3",
        "valueType": "object",
        "value": {
          "serialNumber3": "meSerial-3333",
          "integrationId3": "2547679"
        }
      }
    ]
  }
},
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible",
    "href": "/api/v1/parties/PTY000000000320"
  }
]
}
}
}

```

Completed

```

{
  "eventId": "91c5fdf7-e554-4f1f-a7dd-af954b03592e",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T10:24:27.252Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "44088-240707",
      "id": "ORD000000028084",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "Completed",
      "completionDate": "2026-01-29T10:24:27.166Z",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028084",
    }
  }
}

```

```
"creator": "80099310",
"productOrderItem": [
  {
    "@type": "productOrderItem",
    "action": "add",
    "ftthSubAction": "Activate",
    "id": "FTTH000000034087",
    "state": "Completed",
    "product": {
      "@type": "Product",
      "id": "FTTH000000034087",
      "href": "/api/v1/inventory/FTTH000000034087",
      "name": "FTTH - FiberAdvanced 100 Prepaid",
      "status": "Active",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-SPECIFICATION-01-00",
        "name": "FTTH",
        "version": "1.0"
      },
      "characteristic": [
        {
          "name": "ftthsai",
          "value": "sai1234",
          "valueType": "string"
        },
        {
          "name": "serviceType",
          "value": "Fiber 300 Postpaid",
          "valueType": "string"
        },
        {
          "name": "feasibilityId",
          "value": "F000123",
          "valueType": "string"
        },
        {
          "name": "infraProvider",
          "value": "MOBILY",
          "valueType": "string"
        },
        {
          "name": "ftthPaymentType",
          "value": "Prepaid",
          "valueType": "string"
        },
        {
          "name": "customerCategory",
          "value": "Regular",
          "valueType": "string"
        },
        {
          "name": "cpeDetails",
          "valueType": "array",
          "value": [
            {
              "name": "cpeSku",
              "value": "MD.MBDC.TBLT.APPL.10312",
              "valueType": "string"
            },
            {
              "name": "cpeName",
              "value": "FTTH CPE Postpaid",
              "valueType": "string"
            },
            {
              "name": "cpeType",
              "value": "Router",
              "valueType": "string"
            }
          ]
        }
      ]
    }
  }
]
```

```
    "name": "cpeModel",
    "value": "H155-381",
    "valueType": "string"
  },
  {
    "name": "bandwidth",
    "value": "100",
    "valueType": "string"
  },
  {
    "name": "cpeVendor",
    "value": "Huawei",
    "valueType": "string"
  },
  {
    "name": "qosProfile",
    "value": "FiberAdvanced",
    "valueType": "string"
  },
  {
    "name": "integrationId",
    "value": "124214",
    "valueType": "string"
  },
  {
    "name": "sellPartnerId",
    "value": "1234",
    "valueType": "string"
  },
  {
    "name": "cpeInstallDate",
    "value": "2026-09-24T10:11:24.000Z",
    "valueType": "string"
  },
  {
    "name": "cpeMacAddress1",
    "value": "a45e.609f.3b2c",
    "valueType": "string"
  },
  {
    "name": "cpeSerialNumber",
    "value": "cpeserial-1111",
    "valueType": "string"
  },
  {
    "name": "skipCpeDiscovery",
    "value": "false",
    "valueType": "string"
  },
  {
    "name": "cpeSerialNumberHex",
    "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
    "valueType": "string"
  }
]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    }
  ]
}
```



```
        "name": "geoCoordinates",
        "valueType": "object",
        "value": {
            "latitude": "24.710932",
            "longitude": "46.685435"
        }
    }
]
},
],
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",
        "value": [
            {
                "name": "meActionId",
                "value": "20251225202110",
                "valueType": "string"
            },
            {
                "name": "cpeActionId",
                "value": "20250324123105",
                "valueType": "string"
            }
        ]
    },
    {
        "name": "customerDetails",
        "valueType": "array",
        "value": [
            {
                "name": "can",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "san",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "vip",
                "value": "false",
                "valueType": "string"
            },
            {
                "name": "segment",
                "value": "Consumer",
                "valueType": "string"
            },
            {
                "name": "surname",
                "value": "A.P",
                "valueType": "string"
            },
            {
                "name": "customerId",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "customerName",
                "value": "Fajarisma",
```

```

        "valueType": "string"
    },
    {
        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "address",
        "valueType": "object",
        "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
        }
    },
    {
        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "f.putri@mobily.com.sa",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
]
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "APPT-1003",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-01-31T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeRegion",
            "value": "VIC_Prov",
            "valueType": "string"
        },
        {
            "name": "cpeVendor",
            "value": "ventorMob_Prov",
            "valueType": "string"
        },
        {
            "name": "cpeComments",
            "value": "CPE Installation Successful",
            "valueType": "string"
        }
    ]
}

```

```

    },
    {
      "name": "cpePartition",
      "value": "VIRTUALVENDOR_Prov",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerId",
      "value": "mob-engg-1_Prov",
      "valueType": "string"
    },
    {
      "name": "cpeReasonCode",
      "value": "0",
      "valueType": "string"
    },
    {
      "name": "cpeReasonText",
      "value": "CPE Installation Completed",
      "valueType": "string"
    },
    {
      "name": "cpeTaskStatus",
      "value": "Completed",
      "valueType": "string"
    },
    {
      "name": "cpeWorkOrderId",
      "value": "1-cpe-00000002808420260129101242",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerName",
      "value": "enggAndy_Prov",
      "valueType": "string"
    },
    {
      "name": "cpeEngineerPhone",
      "value": "+966-56-0019900",
      "valueType": "string"
    }
  ]
},
{
  "name": "meshWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "meshRegion",
      "value": "CENTER-CENTER_1_IW",
      "valueType": "string"
    },
    {
      "name": "meshVendor",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshComments",
      "value": "Mesh Installation Successful",
      "valueType": "string"
    },
    {
      "name": "meshPartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    }
  ]
}

```

```

    },
    {
      "name": "meshReasonCode",
      "value": "0",
      "valueType": "string"
    },
    {
      "name": "meshReasonText",
      "value": "Mesh Installation Completed",
      "valueType": "string"
    },
    {
      "name": "meshTaskStatus",
      "value": "Installation Completed",
      "valueType": "string"
    },
    {
      "name": "meshWorkOrderId",
      "value": "2-me-0000000280842026012910133",
      "valueType": "string"
    },
    {
      "name": "meshEngineerName",
      "value": "MOTTEST03_IW",
      "valueType": "string"
    }
  ]
},
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},
{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003663",
    "href": "/api/v1/inventory/ME000000003663",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [
        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        },
        {
          "name": "meshExtender1",
          "valueType": "object",
          "value": {
            "serialNumber1": "meSerial-1111",
            "integrationId1": "3523523"
          }
        },
        {
          "name": "meshExtender2",
          "valueType": "object",

```

```

        "value": {
          "serialNumber2": "meSerial-2222",
          "integrationId2": "789679"
        }
      },
      {
        "name": "meshExtender3",
        "valueType": "object",
        "value": {
          "serialNumber3": "meSerial-3333",
          "integrationId3": "2547679"
        }
      }
    ]
  }
}
],
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible"
  }
]
}
}
}

```

Request (Towards SingleView) - Open Access FTTH Activation

Pending Visit (for ONT)

```

{
  "eventId": "76290c06-2fda-4a3c-b7db-9316482ae924",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:14:04.544Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "1234-5678",
      "id": "ORD000000028111",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Pending Visit",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034136",
          "state": "In Progress|Pending Visit",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034136",
            "href": "/api/v1/inventory/FTTH000000034136",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",

```

```

    "name": "FTTH",
    "version": "1.0"
  },
  "characteristic": [
    {
      "name": "ftthsai",
      "value": "sai1234",
      "valueType": "string"
    },
    {
      "name": "serviceType",
      "value": "Fiber 300 Postpaid",
      "valueType": "string"
    },
    {
      "name": "feasibilityId",
      "value": "F-F100-MY14387751",
      "valueType": "string"
    },
    {
      "name": "infraProvider",
      "value": "STC",
      "valueType": "string"
    },
    {
      "name": "ftthPaymentType",
      "value": "Prepaid",
      "valueType": "string"
    },
    {
      "name": "customerCategory",
      "value": "Regular",
      "valueType": "string"
    },
    {
      "name": "cpeDetails",
      "valueType": "array",
      "value": [
        {
          "name": "cpeName",
          "value": "FTTH CPE Postpaid",
          "valueType": "string"
        },
        {
          "name": "bandwidth",
          "value": "100",
          "valueType": "string"
        },
        {
          "name": "qosProfile",
          "value": "FiberAdvanced",
          "valueType": "string"
        },
        {
          "name": "integrationId",
          "value": "124214",
          "valueType": "string"
        },
        {
          "name": "sellPartnerId",
          "value": "1234",
          "valueType": "string"
        },
        {
          "name": "cpeInstallDate",
          "value": "2026-09-24T10:11:24.000Z",
          "valueType": "string"
        }
      ]
    }
  ],
  {

```

```
"name": "odbDetails",
"valueType": "array",
"value": [
  {
    "name": "odbId",
    "value": "246287462104",
    "valueType": "string"
  },
  {
    "name": "region",
    "value": "Central",
    "valueType": "string"
  },
  {
    "name": "geoCoordinates",
    "valueType": "object",
    "value": {
      "latitude": "24.710932",
      "longitude": "46.685435"
    }
  }
]
},
],
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "ontActionId",
        "value": "0",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    }
  ]
}
```

```

    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "abc@gmail.com",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ]
},
{
  "name": "appointmentDetails",
  "valueType": "array",
  "value": [
    {
      "name": "slotId",
      "value": "5",
      "valueType": "string"
    },
    {
      "name": "appointmentId",
      "value": "212424",
      "valueType": "string"
    },
    {
      "name": "appointmentEndDate",
      "value": "2026-02-02T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "appointmentStartDate",
      "value": "2026-01-29T10:11:24.000Z",
      "valueType": "string"
    }
  ]
},
{
  "name": "cpeWorkOrderDetails",
  "valueType": "array"
},
{
  "name": "serviceOrderDetails",
  "valueType": "array"
}
],

```



```

    "productOrderItemRelationship": [
      {
        "id": "mesh-extender",
        "relationshipType": "Composition"
      }
    ]
  },
  {
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
      "@type": "Product",
      "id": "ME000000003671",
      "href": "/api/v1/inventory/ME000000003671",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
        "name": "Mesh Extender",
        "version": "1.0"
      }
    },
    "characteristic": [
      {
        "name": "meshDetails",
        "valueType": "array",
        "value": [
          {
            "name": "noOfDevices",
            "value": "3",
            "valueType": "string"
          },
          {
            "name": "meshExtender1",
            "valueType": "object",
            "value": {
              "integrationId1": "3523523"
            }
          },
          {
            "name": "meshExtender2",
            "valueType": "object",
            "value": {
              "integrationId2": "789679"
            }
          },
          {
            "name": "meshExtender3",
            "valueType": "object",
            "value": {
              "integrationId3": "2547679"
            }
          }
        ]
      }
    ]
  }
],
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible"
  }
]
}
}
}

```

Installation Completed (for ONT)

```
{
  "eventId": "fcb40ef3-580b-46dc-99b2-982b25842d47",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:17:59.029Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "1234-5678",
      "id": "ORD000000028111",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Installation Completed",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034136",
          "state": "In Progress|Installation Completed",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034136",
            "href": "/api/v1/inventory/FTTH000000034136",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            }
          },
          "characteristic": [
            {
              "name": "ftthSai",
              "value": "sai1234",
              "valueType": "string"
            },
            {
              "name": "serviceType",
              "value": "Fiber 300 Postpaid",
              "valueType": "string"
            },
            {
              "name": "feasibilityId",
              "value": "F-F100-MY14387751",
              "valueType": "string"
            },
            {
              "name": "infraProvider",
              "value": "STC",
              "valueType": "string"
            },
            {
              "name": "ftthPaymentType",
              "value": "Prepaid",
              "valueType": "string"
            },
            {
              "name": "customerCategory",
              "value": "Regular",
              "valueType": "string"
            }
          ]
        }
      ]
    }
  }
}
```

```

"name": "cpeDetails",
"valueType": "array",
"value": [
  {
    "name": "cpeName",
    "value": "FTTH CPE Postpaid",
    "valueType": "string"
  },
  {
    "name": "bandwidth",
    "value": "100",
    "valueType": "string"
  },
  {
    "name": "qosProfile",
    "value": "FiberAdvanced",
    "valueType": "string"
  },
  {
    "name": "integrationId",
    "value": "124214",
    "valueType": "string"
  },
  {
    "name": "sellPartnerId",
    "value": "1234",
    "valueType": "string"
  },
  {
    "name": "cpeInstallDate",
    "value": "2026-09-24T10:11:24.000Z",
    "valueType": "string"
  },
  {
    "name": "cpeSerialNumber",
    "value": "cpeserial-1111",
    "valueType": "string"
  },
  {
    "name": "skipCpeDiscovery",
    "value": "false",
    "valueType": "string"
  }
]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    },
    {
      "name": "geoCoordinates",
      "valueType": "object",
      "value": {
        "latitude": "24.710932",
        "longitude": "46.685435"
      }
    }
  ]
}
],
},

```

```
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "ontActionId",
        "value": "20250615091434",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    }
  ]
},
```

```

        {
            "name": "contacts",
            "valueType": "object",
            "value": {
                "email": "abc@gmail.com",
                "primaryMobile": "+966564543213",
                "secondaryMobile": "+966564543213"
            }
        }
    ],
    },
    {
        "name": "appointmentDetails",
        "valueType": "array",
        "value": [
            {
                "name": "slotId",
                "value": "5",
                "valueType": "string"
            },
            {
                "name": "appointmentId",
                "value": "212424",
                "valueType": "string"
            },
            {
                "name": "appointmentEndDate",
                "value": "2026-02-02T10:11:24.000Z",
                "valueType": "string"
            },
            {
                "name": "appointmentStartDate",
                "value": "2026-01-29T10:11:24.000Z",
                "valueType": "string"
            }
        ]
    },
    },
    {
        "name": "cpeWorkOrderDetails",
        "valueType": "array",
        "value": [
            {
                "name": "cpeReasonCode",
                "value": "null",
                "valueType": "string"
            },
            {
                "name": "cpeReasonText",
                "value": "null",
                "valueType": "string"
            }
        ]
    },
    },
    {
        "name": "serviceOrderDetails",
        "valueType": "array"
    }
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
        "@type": "Product",

```

```

    "id": "ME000000003671",
    "href": "/api/v1/inventory/ME000000003671",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    },
    "characteristic": [
      {
        "name": "meshDetails",
        "valueType": "array",
        "value": [
          {
            "name": "noOfDevices",
            "value": "3",
            "valueType": "string"
          },
          {
            "name": "meshExtender1",
            "valueType": "object",
            "value": {
              "integrationId1": "3523523"
            }
          },
          {
            "name": "meshExtender2",
            "valueType": "object",
            "value": {
              "integrationId2": "789679"
            }
          },
          {
            "name": "meshExtender3",
            "valueType": "object",
            "value": {
              "integrationId3": "2547679"
            }
          }
        ]
      }
    ]
  },
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible"
    }
  ]
}

```

Provisioning Started

```

{
  "eventId": "5a851d67-dc6d-48ff-83b1-c58c5118789f",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:18:03.536Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",

```

```
"externalId": "1234-5678",
"id": "ORD000000028111",
"category": "FTTH",
"orderDate": "2026-01-29T10:11:24.012532Z",
"priority": "50",
"state": "In Progress|Provisioning Started",
"href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
"creator": "80099310",
"productOrderItem": [
  {
    "@type": "productOrderItem",
    "action": "add",
    "ftthSubAction": "Activate",
    "id": "FTTH000000034136",
    "state": "In Progress|Provisioning Started",
    "product": {
      "@type": "Product",
      "id": "FTTH000000034136",
      "href": "/api/v1/inventory/FTTH000000034136",
      "name": "FTTH - FiberAdvanced 100 Prepaid",
      "status": "Pending",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-SPECIFICATION-01-00",
        "name": "FTTH",
        "version": "1.0"
      }
    },
    "characteristic": [
      {
        "name": "ftthsai",
        "value": "sai1234",
        "valueType": "string"
      },
      {
        "name": "serviceType",
        "value": "Fiber 300 Postpaid",
        "valueType": "string"
      },
      {
        "name": "feasibilityId",
        "value": "F-F100-MY14387751",
        "valueType": "string"
      },
      {
        "name": "infraProvider",
        "value": "STC",
        "valueType": "string"
      },
      {
        "name": "ftthPaymentType",
        "value": "Prepaid",
        "valueType": "string"
      },
      {
        "name": "customerCategory",
        "value": "Regular",
        "valueType": "string"
      },
      {
        "name": "cpeDetails",
        "valueType": "array",
        "value": [
          {
            "name": "cpeSku",
            "value": "MD.MBDC.TBLT.APPL.10312",
            "valueType": "string"
          },
          {
            "name": "cpeName",
            "value": "FTTH CPE Postpaid",
            "valueType": "string"
          }
        ]
      }
    ]
  }
]
```

```

    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    },
    {
      "name": "integrationId",
      "value": "124214",
      "valueType": "string"
    },
    {
      "name": "sellPartnerId",
      "value": "1234",
      "valueType": "string"
    },
    {
      "name": "cpeInstallDate",
      "value": "2026-09-24T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "cpeMacAddress1",
      "value": "a45e.609f.3b2c",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumber",
      "value": "cpeserial-1111",
      "valueType": "string"
    },
    {
      "name": "skipCpeDiscovery",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumberHex",
      "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
      "valueType": "string"
    }
  ]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    },
    {
      "name": "geoCoordinates",
      "valueType": "object",
      "value": {
        "latitude": "24.710932",
        "longitude": "46.685435"
      }
    }
  ]
}
]

```



```

    }
  ]
},
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "ontActionId",
        "value": "20250615091434",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",

```

```

        "buildingName": "Alturus"
    }
},
{
    "name": "contacts",
    "valueType": "object",
    "value": {
        "email": "abc@gmail.com",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
    }
}
],
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "212424",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-02-02T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeReasonCode",
            "value": "null",
            "valueType": "string"
        },
        {
            "name": "cpeReasonText",
            "value": "null",
            "valueType": "string"
        }
    ]
},
{
    "name": "serviceOrderDetails",
    "valueType": "array"
}
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",

```

```

    "id": "mesh-extender",
    "product": {
      "@type": "Product",
      "id": "ME000000003671",
      "href": "/api/v1/inventory/ME000000003671",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
        "name": "Mesh Extender",
        "version": "1.0"
      },
      "characteristic": [
        {
          "name": "meshDetails",
          "valueType": "array",
          "value": [
            {
              "name": "noOfDevices",
              "value": "3",
              "valueType": "string"
            },
            {
              "name": "meshExtender1",
              "valueType": "object",
              "value": {
                "integrationId1": "3523523"
              }
            },
            {
              "name": "meshExtender2",
              "valueType": "object",
              "value": {
                "integrationId2": "789679"
              }
            },
            {
              "name": "meshExtender3",
              "valueType": "object",
              "value": {
                "integrationId3": "2547679"
              }
            }
          ]
        }
      ]
    },
    "relatedParty": [
      {
        "@type": "relatedParty",
        "@referredType": "Consumer",
        "id": "23432453",
        "name": "Fajarisma",
        "role": "CommerciallyResponsible"
      }
    ]
  }
}

```

Provisioning Completed

```

{
  "eventId": "6b8eda7d-c132-48a7-b342-c0b69c7e03e8",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:20:31.142Z",
  "event": {

```

```
"productOrder": {
  "@type": "ProductOrder",
  "@baseType": "ProductOrder",
  "externalId": "1234-5678",
  "id": "ORD000000028111",
  "category": "FTTH",
  "orderDate": "2026-01-29T10:11:24.012532Z",
  "priority": "50",
  "state": "In Progress|Provisioning Completed",
  "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
  "creator": "80099310",
  "productOrderItem": [
    {
      "@type": "productOrderItem",
      "action": "add",
      "ftthSubAction": "Activate",
      "id": "FTTH000000034136",
      "state": "In Progress|Provisioning Completed",
      "product": {
        "@type": "Product",
        "id": "FTTH000000034136",
        "href": "/api/v1/inventory/FTTH000000034136",
        "name": "FTTH - FiberAdvanced 100 Prepaid",
        "status": "Pending",
        "quantity": "1",
        "productSpecification": {
          "id": "MOB-FTTH-SPECIFICATION-01-00",
          "name": "FTTH",
          "version": "1.0"
        },
      },
      "characteristic": [
        {
          "name": "ftth sai",
          "value": "sai1234",
          "valueType": "string"
        },
        {
          "name": "serviceType",
          "value": "Fiber 300 Postpaid",
          "valueType": "string"
        },
        {
          "name": "feasibilityId",
          "value": "F-F100-MY14387751",
          "valueType": "string"
        },
        {
          "name": "infraProvider",
          "value": "STC",
          "valueType": "string"
        },
        {
          "name": "ftthPaymentType",
          "value": "Prepaid",
          "valueType": "string"
        },
        {
          "name": "customerCategory",
          "value": "Regular",
          "valueType": "string"
        },
        {
          "name": "cpeDetails",
          "valueType": "array",
          "value": [
            {
              "name": "cpeSku",
              "value": "MD.MBDC.TBLT.APPL.10312",
              "valueType": "string"
            }
          ],
        },
      ],
    }
  ]
}
```

```

        "name": "cpeName",
        "value": "FTTH CPE Postpaid",
        "valueType": "string"
    },
    {
        "name": "bandwidth",
        "value": "100",
        "valueType": "string"
    },
    {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
    },
    {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
    },
    {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
        {
            "name": "region",
            "value": "Central",
            "valueType": "string"
        },
        {
            "name": "geoCoordinates",
            "valueType": "object",
            "value": {
                "latitude": "24.710932",
                "longitude": "46.685435"
            }
        }
    ]
}

```

```

    }
  }
]
}
],
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "ontActionId",
        "value": "20250615091434",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",

```

```

        "value": {
          "zipCode": "6789",
          "streetName": "Whitefield Road",
          "buildingName": "Alturus"
        }
      },
      {
        "name": "contacts",
        "valueType": "object",
        "value": {
          "email": "abc@gmail.com",
          "primaryMobile": "+966564543213",
          "secondaryMobile": "+966564543213"
        }
      }
    ]
  },
  {
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
      {
        "name": "slotId",
        "value": "5",
        "valueType": "string"
      },
      {
        "name": "appointmentId",
        "value": "212424",
        "valueType": "string"
      },
      {
        "name": "appointmentEndDate",
        "value": "2026-02-02T10:11:24.000Z",
        "valueType": "string"
      },
      {
        "name": "appointmentStartDate",
        "value": "2026-01-29T10:11:24.000Z",
        "valueType": "string"
      }
    ]
  },
  {
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
      {
        "name": "cpeReasonCode",
        "value": "null",
        "valueType": "string"
      },
      {
        "name": "cpeReasonText",
        "value": "null",
        "valueType": "string"
      }
    ]
  },
  {
    "name": "serviceOrderDetails",
    "valueType": "array"
  }
],
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},

```

```

{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003671",
    "href": "/api/v1/inventory/ME000000003671",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [
        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        },
        {
          "name": "meshExtender1",
          "valueType": "object",
          "value": {
            "integrationId1": "3523523"
          }
        },
        {
          "name": "meshExtender2",
          "valueType": "object",
          "value": {
            "integrationId2": "789679"
          }
        },
        {
          "name": "meshExtender3",
          "valueType": "object",
          "value": {
            "integrationId3": "2547679"
          }
        }
      ]
    }
  ]
},
"relatedParty": [
  {
    "@type": "relatedParty",
    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible",
    "href": "/api/v1/parties/PTY00000000320"
  }
]
}

```

Pending Visit (for ME)

```

{

```



```
"eventId": "3aef8cae-19c6-4658-880f-9128e5c0efee",
"eventType": "ProductOrderStateChangeEvent",
"eventTime": "2026-01-29T11:28:10.216Z",
"event": {
  "productOrder": {
    "@type": "ProductOrder",
    "@baseType": "ProductOrder",
    "externalId": "1234-5678",
    "id": "ORD000000028111",
    "category": "FTTH",
    "orderDate": "2026-01-29T10:11:24.012532Z",
    "priority": "50",
    "state": "In Progress|Pending Visit",
    "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
    "creator": "80099310",
    "productOrderItem": [
      {
        "@type": "productOrderItem",
        "action": "add",
        "ftthSubAction": "Activate",
        "id": "FTTH000000034136",
        "state": "In Progress|Pending Visit",
        "product": {
          "@type": "Product",
          "id": "FTTH000000034136",
          "href": "/api/v1/inventory/FTTH000000034136",
          "name": "FTTH - FiberAdvanced 100 Prepaid",
          "status": "Pending",
          "quantity": "1",
          "productSpecification": {
            "id": "MOB-FTTH-SPECIFICATION-01-00",
            "name": "FTTH",
            "version": "1.0"
          }
        },
        "characteristic": [
          {
            "name": "ftthsai",
            "value": "sai1234",
            "valueType": "string"
          },
          {
            "name": "serviceType",
            "value": "Fiber 300 Postpaid",
            "valueType": "string"
          },
          {
            "name": "feasibilityId",
            "value": "F-F100-MY14387751",
            "valueType": "string"
          },
          {
            "name": "infraProvider",
            "value": "STC",
            "valueType": "string"
          },
          {
            "name": "ftthPaymentType",
            "value": "Prepaid",
            "valueType": "string"
          },
          {
            "name": "customerCategory",
            "value": "Regular",
            "valueType": "string"
          },
          {
            "name": "cpeDetails",
            "valueType": "array",
            "value": [
              {
                "name": "cpeSku",
```

```

        "value": "MD.MBDC.TBLT.APPL.10312",
        "valueType": "string"
    },
    {
        "name": "cpeName",
        "value": "FTTH CPE Postpaid",
        "valueType": "string"
    },
    {
        "name": "bandwidth",
        "value": "100",
        "valueType": "string"
    },
    {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
    },
    {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
    },
    {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
        {
            "name": "region",
            "value": "Central",
            "valueType": "string"
        }
    ],
    {
        "name": "geoCoordinates",

```

```

        "valueType": "object",
        "value": {
            "latitude": "24.710932",
            "longitude": "46.685435"
        }
    }
}
],
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",
        "value": [
            {
                "name": "meActionId",
                "value": "0",
                "valueType": "string"
            },
            {
                "name": "ontActionId",
                "value": "20250615091434",
                "valueType": "string"
            }
        ]
    },
    {
        "name": "customerDetails",
        "valueType": "array",
        "value": [
            {
                "name": "can",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "san",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "vip",
                "value": "false",
                "valueType": "string"
            },
            {
                "name": "segment",
                "value": "Consumer",
                "valueType": "string"
            },
            {
                "name": "surname",
                "value": "A.P",
                "valueType": "string"
            },
            {
                "name": "customerId",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "customerName",
                "value": "Fajarisma",
                "valueType": "string"
            }
        ]
    }
]

```

```

    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "abc@gmail.com",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ]
},
{
  "name": "appointmentDetails",
  "valueType": "array",
  "value": [
    {
      "name": "slotId",
      "value": "5",
      "valueType": "string"
    },
    {
      "name": "appointmentId",
      "value": "[APT-14312431]",
      "valueType": "string"
    },
    {
      "name": "appointmentEndDate",
      "value": "2026-02-02T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "appointmentStartDate",
      "value": "2026-01-29T10:11:24.000Z",
      "valueType": "string"
    }
  ]
},
{
  "name": "cpeWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeReasonCode",
      "value": "null",
      "valueType": "string"
    },
    {
      "name": "cpeReasonText",
      "value": "null",
      "valueType": "string"
    }
  ]
},
{
  "name": "serviceOrderDetails",
  "valueType": "array"
}

```

```

    },
    {
      "name": "meshWorkOrderDetails",
      "valueType": "array",
      "value": [
        {
          "name": "meshWorkOrderId",
          "value": "2-me-0000000281112026012911288",
          "valueType": "string"
        }
      ]
    }
  ],
  "productOrderItemRelationship": [
    {
      "id": "mesh-extender",
      "relationshipType": "Composition"
    }
  ]
},
{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003671",
    "href": "/api/v1/inventory/ME000000003671",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [
        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        },
        {
          "name": "meshExtender1",
          "valueType": "object",
          "value": {
            "integrationId1": "3523523"
          }
        },
        {
          "name": "meshExtender2",
          "valueType": "object",
          "value": {
            "integrationId2": "789679"
          }
        },
        {
          "name": "meshExtender3",
          "valueType": "object",
          "value": {
            "integrationId3": "2547679"
          }
        }
      ]
    }
  ]
}
],
}
],
}

```

```

    "relatedParty": [
      {
        "@type": "relatedParty",
        "@referredType": "Consumer",
        "id": "23432453",
        "name": "Fajarisma",
        "role": "CommerciallyResponsible"
      }
    ]
  }
}
}

```

Completed (for ME)

```

{
  "eventId": "e8d08b93-f991-4c6b-9709-53fbe4b1d92f",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:30:24.456Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "1234-5678",
      "id": "ORD000000028111",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "In Progress|Completed",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034136",
          "state": "In Progress|Completed",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034136",
            "href": "/api/v1/inventory/FTTH000000034136",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Pending",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            },
            },
          "characteristic": [
            {
              "name": "ftthsa",
              "value": "sai1234",
              "valueType": "string"
            },
            {
              "name": "serviceType",
              "value": "Fiber 300 Postpaid",
              "valueType": "string"
            },
            {
              "name": "feasibilityId",
              "value": "F-F100-MY14387751",
              "valueType": "string"
            },
            {
              "name": "infraProvider",

```

```
"value": "STC",
"valueType": "string"
},
{
  "name": "ftthPaymentType",
  "value": "Prepaid",
  "valueType": "string"
},
{
  "name": "customerCategory",
  "value": "Regular",
  "valueType": "string"
},
{
  "name": "cpeDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeSku",
      "value": "MD.MBDC.TBLT.APPL.10312",
      "valueType": "string"
    },
    {
      "name": "cpeName",
      "value": "FTTH CPE Postpaid",
      "valueType": "string"
    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    },
    {
      "name": "integrationId",
      "value": "124214",
      "valueType": "string"
    },
    {
      "name": "sellPartnerId",
      "value": "1234",
      "valueType": "string"
    },
    {
      "name": "cpeInstallDate",
      "value": "2026-09-24T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "cpeMacAddress1",
      "value": "a45e.609f.3b2c",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumber",
      "value": "cpeserial-1111",
      "valueType": "string"
    },
    {
      "name": "skipCpeDiscovery",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumberHex",
      "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
      "valueType": "string"
    }
  ]
}
```

```

    }
  ]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    },
    {
      "name": "geoCoordinates",
      "valueType": "object",
      "value": {
        "latitude": "24.710932",
        "longitude": "46.685435"
      }
    }
  ]
}
]
},
"productOffering": {
  "@referredType": "productOffering",
  "id": "MOB-FTTH-OFFERING-01-00",
  "name": "Fiber",
  "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
  {
    "name": "actionDetails",
    "valueType": "array",
    "value": [
      {
        "name": "meActionId",
        "value": "20250805204752",
        "valueType": "string"
      },
      {
        "name": "ontActionId",
        "value": "20250615091434",
        "valueType": "string"
      }
    ]
  }
],
{
  "name": "customerDetails",
  "valueType": "array",
  "value": [
    {
      "name": "can",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "san",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    }
  ]
},

```



```

    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "abc@gmail.com",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ]
},
{
  "name": "appointmentDetails",
  "valueType": "array",
  "value": [
    {
      "name": "slotId",
      "value": "5",
      "valueType": "string"
    },
    {
      "name": "appointmentId",
      "value": "[APT-14312431]",
      "valueType": "string"
    },
    {
      "name": "appointmentEndDate",
      "value": "2026-02-02T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "appointmentStartDate",
      "value": "2026-01-29T10:11:24.000Z",
      "valueType": "string"
    }
  ]
}
],

```

```

{
  "name": "cpeWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeReasonCode",
      "value": "null",
      "valueType": "string"
    },
    {
      "name": "cpeReasonText",
      "value": "null",
      "valueType": "string"
    }
  ]
},
{
  "name": "serviceOrderDetails",
  "valueType": "array"
},
{
  "name": "meshWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "meshRegion",
      "value": "CENTER-CENTER_1_IW",
      "valueType": "string"
    },
    {
      "name": "meshVendor",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshPartition",
      "value": "VIRTUALVENDOR_IW",
      "valueType": "string"
    },
    {
      "name": "meshEngineerId",
      "value": "EnggInWork",
      "valueType": "string"
    },
    {
      "name": "meshTaskStatus",
      "value": "Installation Completed",
      "valueType": "string"
    },
    {
      "name": "meshWorkOrderId",
      "value": "2-me-0000000281112026012911288",
      "valueType": "string"
    },
    {
      "name": "meshEngineerName",
      "value": "MOTTEST03_IW",
      "valueType": "string"
    }
  ]
}
],
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},
{
  "@type": "productOrderItem",

```

```

    "action": "add",
    "id": "mesh-extender",
    "product": {
      "@type": "Product",
      "id": "ME000000003671",
      "href": "/api/v1/inventory/ME000000003671",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
        "name": "Mesh Extender",
        "version": "1.0"
      }
    },
    "characteristic": [
      {
        "name": "meshDetails",
        "valueType": "array",
        "value": [
          {
            "name": "noOfDevices",
            "value": "3",
            "valueType": "string"
          },
          {
            "name": "meshExtender1",
            "valueType": "object",
            "value": {
              "serialNumber1": "meSerial-1111",
              "integrationId1": "3523523"
            }
          },
          {
            "name": "meshExtender2",
            "valueType": "object",
            "value": {
              "serialNumber2": "meSerial-2222",
              "integrationId2": "789679"
            }
          },
          {
            "name": "meshExtender3",
            "valueType": "object",
            "value": {
              "serialNumber3": "meSerial-3333",
              "integrationId3": "2547679"
            }
          }
        ]
      }
    ]
  },
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible"
    }
  ]
}

```

Pre-Completion

```
{
```

```
"eventId": "91c81bbe-6f32-44f6-bcf6-04cb6d930330",
"eventType": "ProductOrderStateChangeEvent",
"eventTime": "2026-01-29T11:31:10.873Z",
"event": {
  "productOrder": {
    "@type": "ProductOrder",
    "@baseType": "ProductOrder",
    "externalId": "1234-5678",
    "id": "ORD000000028111",
    "category": "FTTH",
    "orderDate": "2026-01-29T10:11:24.012532Z",
    "priority": "50",
    "state": "In Progress|Pre-Completion",
    "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
    "creator": "80099310",
    "productOrderItem": [
      {
        "@type": "productOrderItem",
        "action": "add",
        "ftthSubAction": "Activate",
        "id": "FTTH000000034136",
        "state": "In Progress|Pre-Completion",
        "product": {
          "@type": "Product",
          "id": "FTTH000000034136",
          "href": "/api/v1/inventory/FTTH000000034136",
          "name": "FTTH - FiberAdvanced 100 Prepaid",
          "status": "Pending",
          "quantity": "1",
          "productSpecification": {
            "id": "MOB-FTTH-SPECIFICATION-01-00",
            "name": "FTTH",
            "version": "1.0"
          }
        },
        "characteristic": [
          {
            "name": "ftthsai",
            "value": "sai1234",
            "valueType": "string"
          },
          {
            "name": "serviceType",
            "value": "Fiber 300 Postpaid",
            "valueType": "string"
          },
          {
            "name": "feasibilityId",
            "value": "F-F100-MY14387751",
            "valueType": "string"
          },
          {
            "name": "infraProvider",
            "value": "STC",
            "valueType": "string"
          },
          {
            "name": "ftthPaymentType",
            "value": "Prepaid",
            "valueType": "string"
          },
          {
            "name": "customerCategory",
            "value": "Regular",
            "valueType": "string"
          },
          {
            "name": "cpeDetails",
            "valueType": "array",
            "value": [
              {
                "name": "cpeSku",
```

```

        "value": "MD.MBDC.TBLT.APPL.10312",
        "valueType": "string"
    },
    {
        "name": "cpeName",
        "value": "FTTH CPE Postpaid",
        "valueType": "string"
    },
    {
        "name": "bandwidth",
        "value": "100",
        "valueType": "string"
    },
    {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
    },
    {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    },
    {
        "name": "cpeMacAddress1",
        "value": "a45e.609f.3b2c",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumber",
        "value": "cpeserial-1111",
        "valueType": "string"
    },
    {
        "name": "skipCpeDiscovery",
        "value": "false",
        "valueType": "string"
    },
    {
        "name": "cpeSerialNumberHex",
        "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
        {
            "name": "region",
            "value": "Central",
            "valueType": "string"
        }
    ],
    {
        "name": "geoCoordinates",

```

```

        "valueType": "object",
        "value": {
            "latitude": "24.710932",
            "longitude": "46.685435"
        }
    }
}
],
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",
        "value": [
            {
                "name": "meActionId",
                "value": "20250805204752",
                "valueType": "string"
            },
            {
                "name": "ontActionId",
                "value": "20250615091434",
                "valueType": "string"
            }
        ]
    },
    {
        "name": "customerDetails",
        "valueType": "array",
        "value": [
            {
                "name": "can",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "san",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "vip",
                "value": "false",
                "valueType": "string"
            },
            {
                "name": "segment",
                "value": "Consumer",
                "valueType": "string"
            },
            {
                "name": "surname",
                "value": "A.P",
                "valueType": "string"
            },
            {
                "name": "customerId",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "customerName",
                "value": "Fajarisma",
                "valueType": "string"
            }
        ]
    }
]

```

```

    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "abc@gmail.com",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ]
},
{
  "name": "appointmentDetails",
  "valueType": "array",
  "value": [
    {
      "name": "slotId",
      "value": "5",
      "valueType": "string"
    },
    {
      "name": "appointmentId",
      "value": "[APT-14312431]",
      "valueType": "string"
    },
    {
      "name": "appointmentEndDate",
      "value": "2026-02-02T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "appointmentStartDate",
      "value": "2026-01-29T10:11:24.000Z",
      "valueType": "string"
    }
  ]
},
{
  "name": "cpeWorkOrderDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeReasonCode",
      "value": "null",
      "valueType": "string"
    },
    {
      "name": "cpeReasonText",
      "value": "null",
      "valueType": "string"
    }
  ]
},
{
  "name": "serviceOrderDetails",
  "valueType": "array"
}

```

```

    },
    {
      "name": "meshWorkOrderDetails",
      "valueType": "array",
      "value": [
        {
          "name": "meshRegion",
          "value": "CENTER-CENTER_1_IW",
          "valueType": "string"
        },
        {
          "name": "meshVendor",
          "value": "VIRTUALVENDOR_IW",
          "valueType": "string"
        },
        {
          "name": "meshComments",
          "value": "Mesh Installation Successful",
          "valueType": "string"
        },
        {
          "name": "meshPartition",
          "value": "VIRTUALVENDOR_IW",
          "valueType": "string"
        },
        {
          "name": "meshEngineerId",
          "value": "EnggInWork",
          "valueType": "string"
        },
        {
          "name": "meshReasonCode",
          "value": "0",
          "valueType": "string"
        },
        {
          "name": "meshReasonText",
          "value": "Mesh Installation Completed",
          "valueType": "string"
        },
        {
          "name": "meshTaskStatus",
          "value": "Installation Completed",
          "valueType": "string"
        },
        {
          "name": "meshWorkOrderId",
          "value": "2-me-0000000281112026012911288",
          "valueType": "string"
        },
        {
          "name": "meshEngineerName",
          "value": "MOTTEST03_IW",
          "valueType": "string"
        }
      ]
    }
  ],
  "productOrderItemRelationship": [
    {
      "id": "mesh-extender",
      "relationshipType": "Composition"
    }
  ]
},
{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",

```



```

    "id": "ME000000003671",
    "href": "/api/v1/inventory/ME000000003671",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    },
    "characteristic": [
      {
        "name": "meshDetails",
        "valueType": "array",
        "value": [
          {
            "name": "noOfDevices",
            "value": "3",
            "valueType": "string"
          },
          {
            "name": "meshExtender1",
            "valueType": "object",
            "value": {
              "serialNumber1": "meSerial-1111",
              "integrationId1": "3523523"
            }
          },
          {
            "name": "meshExtender2",
            "valueType": "object",
            "value": {
              "serialNumber2": "meSerial-2222",
              "integrationId2": "789679"
            }
          },
          {
            "name": "meshExtender3",
            "valueType": "object",
            "value": {
              "serialNumber3": "meSerial-3333",
              "integrationId3": "2547679"
            }
          }
        ]
      }
    ]
  },
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible",
      "href": "/api/v1/parties/PTY00000000320"
    }
  ]
}

```

Completed

```

{
  "eventId": "8cbcd200-9b67-4ed6-a3a6-e4f8c349a859",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:32:08.872Z",

```

```
"event": {
  "productOrder": {
    "@type": "ProductOrder",
    "@baseType": "ProductOrder",
    "externalId": "1234-5678",
    "id": "ORD000000028111",
    "category": "FTTH",
    "orderDate": "2026-01-29T10:11:24.012532Z",
    "priority": "50",
    "state": "Completed",
    "completionDate": "2026-01-29T11:32:08.790709Z",
    "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028111",
    "creator": "80099310",
    "productOrderItem": [
      {
        "@type": "productOrderItem",
        "action": "add",
        "ftthSubAction": "Activate",
        "id": "FTTH000000034136",
        "state": "Completed",
        "product": {
          "@type": "Product",
          "id": "FTTH000000034136",
          "href": "/api/v1/inventory/FTTH000000034136",
          "name": "FTTH - FiberAdvanced 100 Prepaid",
          "status": "Active",
          "quantity": "1",
          "productSpecification": {
            "id": "MOB-FTTH-SPECIFICATION-01-00",
            "name": "FTTH",
            "version": "1.0"
          },
        },
        "characteristic": [
          {
            "name": "ftthSai",
            "value": "sai1234",
            "valueType": "string"
          },
          {
            "name": "serviceType",
            "value": "Fiber 300 Postpaid",
            "valueType": "string"
          },
          {
            "name": "feasibilityId",
            "value": "F-F100-MY14387751",
            "valueType": "string"
          },
          {
            "name": "infraProvider",
            "value": "STC",
            "valueType": "string"
          },
          {
            "name": "ftthPaymentType",
            "value": "Prepaid",
            "valueType": "string"
          },
          {
            "name": "customerCategory",
            "value": "Regular",
            "valueType": "string"
          },
          {
            "name": "cpeDetails",
            "valueType": "array",
            "value": [
              {
                "name": "cpeSku",
                "value": "MD.MBDC.TBLT.APPL.10312",
                "valueType": "string"
              }
            ]
          }
        ]
      }
    ]
  }
}
```

```

    },
    {
      "name": "cpeName",
      "value": "FTTH CPE Postpaid",
      "valueType": "string"
    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    },
    {
      "name": "integrationId",
      "value": "124214",
      "valueType": "string"
    },
    {
      "name": "sellPartnerId",
      "value": "1234",
      "valueType": "string"
    },
    {
      "name": "cpeInstallDate",
      "value": "2026-09-24T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "cpeMacAddress1",
      "value": "a45e.609f.3b2c",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumber",
      "value": "cpeserial-1111",
      "valueType": "string"
    },
    {
      "name": "skipCpeDiscovery",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "cpeSerialNumberHex",
      "value": "48 57 49 34 32 36 37 34 39 32 32 37 36",
      "valueType": "string"
    }
  ]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    },
    {
      "name": "geoCoordinates",
      "valueType": "object",
      "value": {

```

```
        "latitude": "24.710932",
        "longitude": "46.685435"
    }
}
]
}
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "actionDetails",
        "valueType": "array",
        "value": [
            {
                "name": "meActionId",
                "value": "20250805204752",
                "valueType": "string"
            },
            {
                "name": "ontActionId",
                "value": "20250615091434",
                "valueType": "string"
            }
        ]
    }
],
{
    "name": "customerDetails",
    "valueType": "array",
    "value": [
        {
            "name": "can",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "san",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "vip",
            "value": "false",
            "valueType": "string"
        },
        {
            "name": "segment",
            "value": "Consumer",
            "valueType": "string"
        },
        {
            "name": "surname",
            "value": "A.P",
            "valueType": "string"
        },
        {
            "name": "customerId",
            "value": "23432453",
            "valueType": "string"
        },
        {
            "name": "customerName",
            "value": "Fajarisma",
            "valueType": "string"
        }
    ],
    {
```

```

        "name": "customerType",
        "value": "Consumer",
        "valueType": "string"
    },
    {
        "name": "address",
        "valueType": "object",
        "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
        }
    },
    {
        "name": "contacts",
        "valueType": "object",
        "value": {
            "email": "abc@gmail.com",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
        }
    }
]
},
{
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
        {
            "name": "slotId",
            "value": "5",
            "valueType": "string"
        },
        {
            "name": "appointmentId",
            "value": "[APT-14312431]",
            "valueType": "string"
        },
        {
            "name": "appointmentEndDate",
            "value": "2026-02-02T10:11:24.000Z",
            "valueType": "string"
        },
        {
            "name": "appointmentStartDate",
            "value": "2026-01-29T10:11:24.000Z",
            "valueType": "string"
        }
    ]
},
{
    "name": "cpeWorkOrderDetails",
    "valueType": "array",
    "value": [
        {
            "name": "cpeReasonCode",
            "value": "null",
            "valueType": "string"
        },
        {
            "name": "cpeReasonText",
            "value": "null",
            "valueType": "string"
        }
    ]
},
{
    "name": "serviceOrderDetails",
    "valueType": "array"
},
{

```

```

"name": "meshWorkOrderDetails",
"valueType": "array",
"value": [
  {
    "name": "meshRegion",
    "value": "CENTER-CENTER_1_IW",
    "valueType": "string"
  },
  {
    "name": "meshVendor",
    "value": "VIRTUALVENDOR_IW",
    "valueType": "string"
  },
  {
    "name": "meshComments",
    "value": "Mesh Installation Successful",
    "valueType": "string"
  },
  {
    "name": "meshPartition",
    "value": "VIRTUALVENDOR_IW",
    "valueType": "string"
  },
  {
    "name": "meshEngineerId",
    "value": "EnggInWork",
    "valueType": "string"
  },
  {
    "name": "meshReasonCode",
    "value": "0",
    "valueType": "string"
  },
  {
    "name": "meshReasonText",
    "value": "Mesh Installation Completed",
    "valueType": "string"
  },
  {
    "name": "meshTaskStatus",
    "value": "Installation Completed",
    "valueType": "string"
  },
  {
    "name": "meshWorkOrderId",
    "value": "2-me-00000000281112026012911288",
    "valueType": "string"
  },
  {
    "name": "meshEngineerName",
    "value": "MOTTEST03_IW",
    "valueType": "string"
  }
]
},
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},
{
"@type": "productOrderItem",
"action": "add",
"id": "mesh-extender",
"product": {
"@type": "Product",
"id": "ME000000003671",
"href": "/api/v1/inventory/ME000000003671",

```

```

    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    },
    "characteristic": [
      {
        "name": "meshDetails",
        "valueType": "array",
        "value": [
          {
            "name": "noOfDevices",
            "value": "3",
            "valueType": "string"
          },
          {
            "name": "meshExtender1",
            "valueType": "object",
            "value": {
              "serialNumber1": "meSerial-1111",
              "integrationId1": "3523523"
            }
          },
          {
            "name": "meshExtender2",
            "valueType": "object",
            "value": {
              "serialNumber2": "meSerial-2222",
              "integrationId2": "789679"
            }
          },
          {
            "name": "meshExtender3",
            "valueType": "object",
            "value": {
              "serialNumber3": "meSerial-3333",
              "integrationId3": "2547679"
            }
          }
        ]
      }
    ]
  },
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible"
    }
  ]
}

```

Pre-Cancellation

```

{
  "eventId": "845c3a74-2665-4952-a332-982e5b08475d",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:40:19.427Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",

```

```
"@baseType": "ProductOrder",
"externalId": "1234-5678",
"id": "ORD000000028176",
"category": "FTTH",
"orderDate": "2026-01-29T10:11:24.012532Z",
"priority": "50",
"state": "In Progress|Pre-Cancellation",
"href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028176",
"creator": "80099310",
"productOrderItem": [
  {
    "@type": "productOrderItem",
    "action": "add",
    "ftthSubAction": "Activate",
    "id": "FTTH000000034209",
    "state": "In Progress|Pre-Cancellation",
    "product": {
      "@type": "Product",
      "id": "FTTH000000034209",
      "href": "/api/v1/inventory/FTTH000000034209",
      "name": "FTTH - FiberAdvanced 100 Prepaid",
      "status": "Pending",
      "quantity": "1",
      "productSpecification": {
        "id": "MOB-FTTH-SPECIFICATION-01-00",
        "name": "FTTH",
        "version": "1.0"
      }
    },
    "characteristic": [
      {
        "name": "ftthsai",
        "value": "sai1234",
        "valueType": "string"
      },
      {
        "name": "serviceType",
        "value": "Fiber 300 Postpaid",
        "valueType": "string"
      },
      {
        "name": "feasibilityId",
        "value": "F-F100-MY61773899",
        "valueType": "string"
      },
      {
        "name": "infraProvider",
        "value": "STC",
        "valueType": "string"
      },
      {
        "name": "ftthPaymentType",
        "value": "Prepaid",
        "valueType": "string"
      },
      {
        "name": "customerCategory",
        "value": "Regular",
        "valueType": "string"
      },
      {
        "name": "cpeDetails",
        "valueType": "array",
        "value": [
          {
            "name": "cpeName",
            "value": "FTTH CPE Postpaid",
            "valueType": "string"
          }
        ],
        {
          "name": "bandwidth",
          "value": "100",
```



```

        "valueType": "string"
    },
    {
        "name": "qosProfile",
        "value": "FiberAdvanced",
        "valueType": "string"
    },
    {
        "name": "integrationId",
        "value": "124214",
        "valueType": "string"
    },
    {
        "name": "sellPartnerId",
        "value": "1234",
        "valueType": "string"
    },
    {
        "name": "cpeInstallDate",
        "value": "2026-09-24T10:11:24.000Z",
        "valueType": "string"
    }
]
},
{
    "name": "odbDetails",
    "valueType": "array",
    "value": [
        {
            "name": "odbId",
            "value": "246287462104",
            "valueType": "string"
        },
        {
            "name": "region",
            "value": "Central",
            "valueType": "string"
        },
        {
            "name": "geoCoordinates",
            "valueType": "object",
            "value": {
                "latitude": "24.710932",
                "longitude": "46.685435"
            }
        }
    ]
}
]
},
"productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
},
"orderCharacteristic": [
    {
        "name": "customerDetails",
        "valueType": "array",
        "value": [
            {
                "name": "can",
                "value": "23432453",
                "valueType": "string"
            },
            {
                "name": "san",
                "value": "23432453",
                "valueType": "string"
            }
        ]
    }
],

```

```

    {
      "name": "vip",
      "value": "false",
      "valueType": "string"
    },
    {
      "name": "segment",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "surname",
      "value": "A.P",
      "valueType": "string"
    },
    {
      "name": "customerId",
      "value": "23432453",
      "valueType": "string"
    },
    {
      "name": "customerName",
      "value": "Fajarisma",
      "valueType": "string"
    },
    {
      "name": "customerType",
      "value": "Consumer",
      "valueType": "string"
    },
    {
      "name": "address",
      "valueType": "object",
      "value": {
        "zipCode": "6789",
        "streetName": "Whitefield Road",
        "buildingName": "Alturus"
      }
    },
    {
      "name": "contacts",
      "valueType": "object",
      "value": {
        "email": "abc@gmail.com",
        "primaryMobile": "+966564543213",
        "secondaryMobile": "+966564543213"
      }
    }
  ]
},
{
  "name": "appointmentDetails",
  "valueType": "array",
  "value": [
    {
      "name": "slotId",
      "value": "5",
      "valueType": "string"
    },
    {
      "name": "appointmentId",
      "value": "212424",
      "valueType": "string"
    },
    {
      "name": "appointmentEndDate",
      "value": "2026-02-02T10:11:24.000Z",
      "valueType": "string"
    },
    {
      "name": "appointmentStartDate",

```

```

        "value": "2026-01-29T10:11:24.000Z",
        "valueType": "string"
    }
}
],
{
    "name": "serviceOrderDetails",
    "valueType": "array"
}
],
"productOrderItemRelationship": [
    {
        "id": "mesh-extender",
        "relationshipType": "Composition"
    }
]
},
{
    "@type": "productOrderItem",
    "action": "add",
    "id": "mesh-extender",
    "product": {
        "@type": "Product",
        "id": "ME000000003692",
        "href": "/api/v1/inventory/ME000000003692",
        "quantity": "1",
        "productSpecification": {
            "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
            "name": "Mesh Extender",
            "version": "1.0"
        }
    },
    "characteristic": [
        {
            "name": "meshDetails",
            "valueType": "array",
            "value": [
                {
                    "name": "noOfDevices",
                    "value": "3",
                    "valueType": "string"
                },
                {
                    "name": "meshExtender1",
                    "valueType": "object",
                    "value": {
                        "integrationId1": "3523523"
                    }
                },
                {
                    "name": "meshExtender2",
                    "valueType": "object",
                    "value": {
                        "integrationId2": "789679"
                    }
                },
                {
                    "name": "meshExtender3",
                    "valueType": "object",
                    "value": {
                        "integrationId3": "2547679"
                    }
                }
            ]
        }
    ]
}
],
"relatedParty": [
    {
        "@type": "relatedParty",

```

```

    "@referredType": "Consumer",
    "id": "23432453",
    "name": "Fajarisma",
    "role": "CommerciallyResponsible",
    "href": "/api/v1/parties/PTY0000000000320"
  }
}
}
}
}

```

Cancelled

```

{
  "eventId": "00af1ee6-16db-453c-9545-5dc3cb221469",
  "eventType": "ProductOrderStateChangeEvent",
  "eventTime": "2026-01-29T11:42:23.859Z",
  "event": {
    "productOrder": {
      "@type": "ProductOrder",
      "@baseType": "ProductOrder",
      "externalId": "1234-5678",
      "id": "ORD000000028176",
      "category": "FTTH",
      "orderDate": "2026-01-29T10:11:24.012532Z",
      "priority": "50",
      "state": "Cancelled",
      "href": "/tmf-api/productOrderingManagement/v4/productOrder/ORD000000028176",
      "creator": "80099310",
      "productOrderItem": [
        {
          "@type": "productOrderItem",
          "action": "add",
          "ftthSubAction": "Activate",
          "id": "FTTH000000034209",
          "state": "Cancelled",
          "product": {
            "@type": "Product",
            "id": "FTTH000000034209",
            "href": "/api/v1/inventory/FTTH000000034209",
            "name": "FTTH - FiberAdvanced 100 Prepaid",
            "status": "Discarded",
            "quantity": "1",
            "productSpecification": {
              "id": "MOB-FTTH-SPECIFICATION-01-00",
              "name": "FTTH",
              "version": "1.0"
            }
          },
          "characteristic": [
            {
              "name": "ftthsai",
              "value": "sai1234",
              "valueType": "string"
            },
            {
              "name": "serviceType",
              "value": "Fiber 300 Postpaid",
              "valueType": "string"
            },
            {
              "name": "feasibilityId",
              "value": "F-F100-MY61773899",
              "valueType": "string"
            },
            {
              "name": "infraProvider",
              "value": "STC",
              "valueType": "string"
            }
          ]
        }
      ]
    }
  }
}

```

```

},
{
  "name": "ftthPaymentType",
  "value": "Prepaid",
  "valueType": "string"
},
{
  "name": "customerCategory",
  "value": "Regular",
  "valueType": "string"
},
{
  "name": "cpeDetails",
  "valueType": "array",
  "value": [
    {
      "name": "cpeName",
      "value": "FTTH CPE Postpaid",
      "valueType": "string"
    },
    {
      "name": "bandwidth",
      "value": "100",
      "valueType": "string"
    },
    {
      "name": "qosProfile",
      "value": "FiberAdvanced",
      "valueType": "string"
    },
    {
      "name": "integrationId",
      "value": "124214",
      "valueType": "string"
    },
    {
      "name": "sellPartnerId",
      "value": "1234",
      "valueType": "string"
    },
    {
      "name": "cpeInstallDate",
      "value": "2026-09-24T10:11:24.000Z",
      "valueType": "string"
    }
  ]
},
{
  "name": "odbDetails",
  "valueType": "array",
  "value": [
    {
      "name": "odbId",
      "value": "246287462104",
      "valueType": "string"
    },
    {
      "name": "region",
      "value": "Central",
      "valueType": "string"
    },
    {
      "name": "geoCoordinates",
      "valueType": "object",
      "value": {
        "latitude": "24.710932",
        "longitude": "46.685435"
      }
    }
  ]
}
]
}

```

```

    ]
  },
  "productOffering": {
    "@referredType": "productOffering",
    "id": "MOB-FTTH-OFFERING-01-00",
    "name": "Fiber",
    "href": "/api/v1/offerings/MOB-FTTH-OFFERING-01-00"
  },
  "orderCharacteristic": [
    {
      "name": "customerDetails",
      "valueType": "array",
      "value": [
        {
          "name": "can",
          "value": "23432453",
          "valueType": "string"
        },
        {
          "name": "san",
          "value": "23432453",
          "valueType": "string"
        },
        {
          "name": "vip",
          "value": "false",
          "valueType": "string"
        },
        {
          "name": "segment",
          "value": "Consumer",
          "valueType": "string"
        },
        {
          "name": "surname",
          "value": "A.P",
          "valueType": "string"
        },
        {
          "name": "customerId",
          "value": "23432453",
          "valueType": "string"
        },
        {
          "name": "customerName",
          "value": "Fajarisma",
          "valueType": "string"
        },
        {
          "name": "customerType",
          "value": "Consumer",
          "valueType": "string"
        },
        {
          "name": "address",
          "valueType": "object",
          "value": {
            "zipCode": "6789",
            "streetName": "Whitefield Road",
            "buildingName": "Alturus"
          }
        },
        {
          "name": "contacts",
          "valueType": "object",
          "value": {
            "email": "abc@gmail.com",
            "primaryMobile": "+966564543213",
            "secondaryMobile": "+966564543213"
          }
        }
      ]
    }
  ]
}

```

```

    ]
  },
  {
    "name": "appointmentDetails",
    "valueType": "array",
    "value": [
      {
        "name": "slotId",
        "value": "5",
        "valueType": "string"
      },
      {
        "name": "appointmentId",
        "value": "212424",
        "valueType": "string"
      },
      {
        "name": "appointmentEndDate",
        "value": "2026-02-02T10:11:24.000Z",
        "valueType": "string"
      },
      {
        "name": "appointmentStartDate",
        "value": "2026-01-29T10:11:24.000Z",
        "valueType": "string"
      }
    ]
  },
  {
    "name": "serviceOrderDetails",
    "valueType": "array"
  }
],
"productOrderItemRelationship": [
  {
    "id": "mesh-extender",
    "relationshipType": "Composition"
  }
]
},
{
  "@type": "productOrderItem",
  "action": "add",
  "id": "mesh-extender",
  "product": {
    "@type": "Product",
    "id": "ME000000003692",
    "href": "/api/v1/inventory/ME000000003692",
    "quantity": "1",
    "productSpecification": {
      "id": "MOB-FTTH-MESH-EXTENDER-SPECIFICATION-01-00",
      "name": "Mesh Extender",
      "version": "1.0"
    }
  },
  "characteristic": [
    {
      "name": "meshDetails",
      "valueType": "array",
      "value": [
        {
          "name": "noOfDevices",
          "value": "3",
          "valueType": "string"
        }
      ],
      {
        "name": "meshExtender1",
        "valueType": "object",
        "value": {
          "integrationId1": "3523523"
        }
      }
    ]
  },

```

```

        {
          "name": "meshExtender2",
          "valueType": "object",
          "value": {
            "integrationId2": "789679"
          }
        },
        {
          "name": "meshExtender3",
          "valueType": "object",
          "value": {
            "integrationId3": "2547679"
          }
        }
      ]
    }
  ],
  "relatedParty": [
    {
      "@type": "relatedParty",
      "@referredType": "Consumer",
      "id": "23432453",
      "name": "Fajarisma",
      "role": "CommerciallyResponsible"
    }
  ]
}

```

Acknowledgement Response (From SingleView)

```

{
  "receivedNotification": "success"
}

```

Notification Event Template Structure

```

{
  "eventId": "<Event Id>",
  "eventTime": "<Event Date/Time>",
  "eventType": "<Event Type>",
  "event": {
    "<Type of Order>": {
      "externalId": "<SingleView order Id>",
      "id": "<Telflow order Id>",
      "orderState": "<Order state>",
      "status": "<Action status>"
    }
  }
}

```

Notification Event (From SingleView)


```
{
  "eventId": "Event-TF0000000003055",
  "eventTime": "2025-11-05T07:36:03.582Z",
  "eventType": "salesOrderStateChangeNotification",
  "event": {
    "salesOrder": {
      "externalId": "20250117234846",
      "id": "ORD1873871",
      "orderState": "In Progress|Provisioning Completed",
      "status": "Completed"
    }
  }
}
```