

GUI Architecture Workflow Playbook

ACME Asia 1,024-GPU HGX B300 AI Factory

Map the ACME Asia v1.1 intake through ordinary visible controls: 1,024 HGX B300 GPUs, Quantum-X800 east-west, converged Spectrum-X/WEKA, SN5610, phased populations, Rafay SaaS, open external bandwidth and all review stages.

Scenario ID	PB-VAL-ACME ASIA-1024-PHYSICAL
Project ID	AIF-PROJ-000001
Journey result	Passed
Visible GUI steps	39
Direct API advancement	0
HTTP failures	0

Use only the visible labels and controls shown. Complete every review stage; do not use Skip for now during your initial training session.

Scenario Input Parameters

These are the exact governed selections used by the illustrated run based on inputs from a real customer design exercise.

Parameter	Value
Input authority	ACME Asia Neon Intake v1.1.0
Target	128 HGX B300 systems / 1,024 GPUs
East-west fabric	Quantum-X800; 16 Q3400 leaf and 8 Q3400 spine at target
North-south and storage fabric	Spectrum-X; 8 SN5610 leaf and 4 SN5610 spine at target
WEKA population	12 / 24 / 48 cumulative backends
Storage performance	250,000 GB/s read; 100,000 GB/s write (customer confirmation retained)
OOB access / aggregation	4/2, 6/2, 21/2 by phase
Control and observability	10 control nodes; 3 / 4 / 6 observability nodes
External bandwidth	Not specified by customer; confirmation remains open
Tenancy	Unknown; customer confirmation remains open
Workflow policy	Review every stage; do not skip

Note: Throughout the process of using the AI Factory Architect workflow, you should be able to collect results (diagrams, specifications, Bom/BoQ, architecture rules and documents) before the final document generation. This allows experimentation and exploration before generating the final architecture documents.

Step	Activity	Visible GUI context
------	----------	---------------------

1

Expand External Connectivity requirements

Stage: Define

North-south connectivity inputs displayed.

You can provide high level specifications for external connectivity to the AI Factory (DC to DC, DC to customer premise, DC to internet)

Neon AI Factory Architect

VAST Candidate Pattern

Gen6 CBox + Ceres v2 60TB

VAST Demand Profile

NCP standard

VAST High Availability

☒

Usable Capacity

15

PiB

Performance Profile

Checkpoint intensive

ADVANCED STORAGE SIZING & PROTOCOLS

External Connectivity

☐ External connectivity is required

☐ Customer access

☐ Corporate network

☐ Data ingest / egress

☐ Management integration

Redundancy

Dual

Aggregate Bandwidth (Gbps)

Unresolved

Routing Handoff

eBGP

Security Edge

Provider required

Connectivity Model

Private

Customer Edge Owner

ARCHITECTURE WORKFLOW

Define / active

RECOMMENDED NEXT ACTION

Create Project and Compile

Create one persistent project from these inputs and run its first server-backed compilation.

Create Project and Compile

1 Define

active

2 Generate

not started

3 Review Baseline Requirements

not started

4 Review Architecture Risks

not started

5 Review Security

not started

6 Refine

not started

Evaluation NEW-PROJECT-TEMPLATE has no active-stage blockers or warnings.

Project Overview

Implementation Options

BD Installed Solution Architect

About

Sign out

Overview

Architecture

Network & Fabrics

Storage

Facilities

Security

BOM

Requirements

Hardware

Maximum options per requirement

Preferred vendor IDs (optional)

3

VENDOR-NVIDIA, VENDOR-WEKA

Generate Vendor Options

DOCUMENTATION COMPILER

Generate Architecture Document

No document generated

Create or open a project before generating a document.

Document Profile

Full Solution Architecture Definitive

Output Mode

ADC Typed Review Draft

Generate Document

Ready

None

Partial

None

Unresolved

None

Generate a document to create review downloads.

Customer Issue Approval

Generate an immutable document before approval.

Not available

BASELINE ARCHITECTURE RISK COMPILER

Architecture Baseline Risk Register

Save an immutable architecture checkpoint before

New clean project template started. No prior project or output is attached.

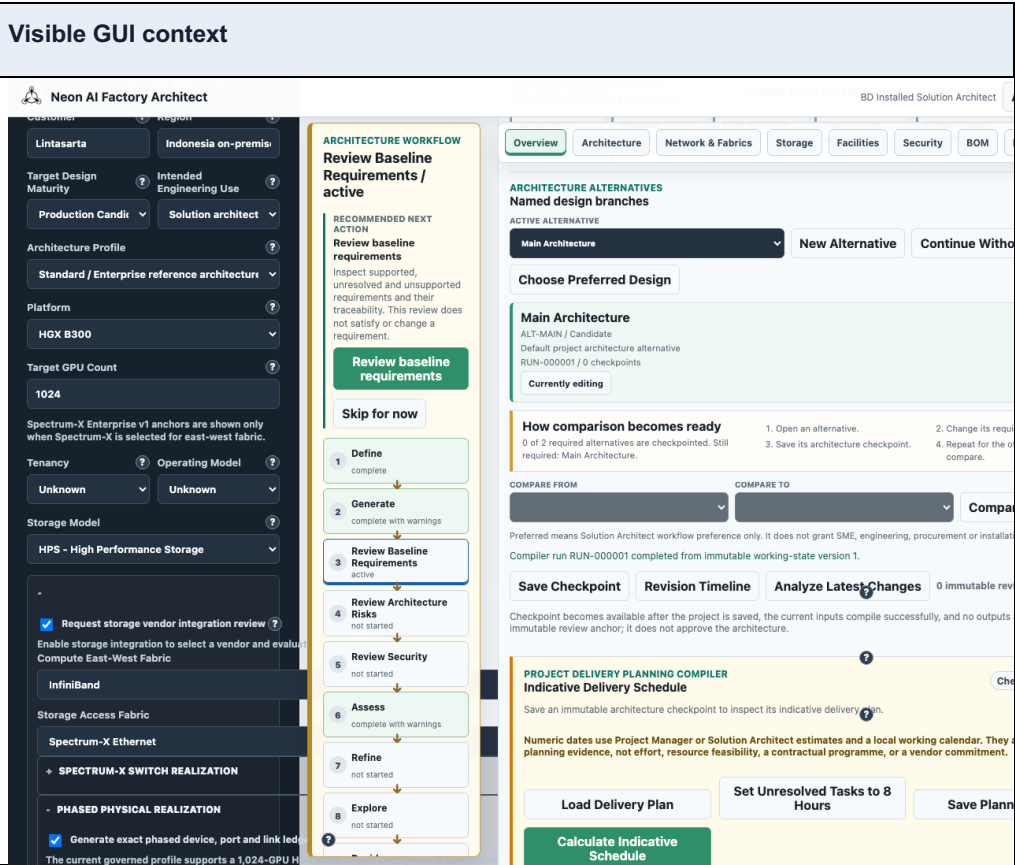
RADC binds findings to an immutable revision and disses on later edits cannot silently change the architecture being

Step	Activity	Visible GUI context
2	Expand advanced storage sizing and protocols Stage: Define Specify Storage performance, topology and protocol requirements. Use available parameters you might have or accept the defaults displayed.	Neon AI Factory Architect VAST Candidate Pattern Gen6 CBox + Ceres v2 60TB VAST Demand Profile NCP standard VAST High Availability ☒ Usable Capacity 15 PIB Performance Profile Checkpoint intensive ADVANCED STORAGE SIZING & PROTOCOLS Active GPU Fraction 0.1 Throughput Semantics Sustained stor Read GB/s per GPU e.g. 2.5 Write GB/s per GPU e.g. 1.0 Aggregate Read GB/s e.g. 5184 Aggregate Write GB/s e.g. 2074 Metadata Creates/s e.g. 1600000 Metadata Stats/s e.g. 4000000 Capacity Reserve Fraction e.g. 0.20 Growth Factor e.g. 1.30 Frontend Plane Count e.g. 2 Frontend Port Speed GB/s e.g. 400 Storage Protocols ARCHITECTURE WORKFLOW Define / active RECOMMENDED NEXT ACTION Create Project and Compile Create one persistent project from these inputs and run its first server-backed compilation. Create Project and Compile 1 Define active 2 Generate not started 3 Review Baseline Requirements not started 4 Review Architecture Risks not started 5 Review Security not started 6 Refine not started Evaluation NEW-PROJECT-TEMPLATE has no active-stage blockers or warnings. Information Dashboard BD Installed Solution Architect About Sign out Overview Architecture Network & Fabrics Storage Facilities Security BOM Requirements Hardware Maximum options per requirement 3 Preferred vendor IDs (optional) VENDOR-NVIDIA, VENDOR-WEKA Generate Vendor Options DOCUMENTATION COMPILER Generate Architecture Document No document generated Create or open a project before generating a document. Personas ☒ Solution Architect ☒ CTO ☐ Network Engineer ☐ Storage Engineer Document Profile Full Solution Architecture Definitive Output Mode ADC Typed Review Draft Generate Document Ready None Partial None Unresolved None Generate a document to create review downloads. CUSTOMER ISSUE APPROVAL Generate an immutable document before approval. Not available BASELINE ARCHITECTURE RISK COMPILER Architecture Baseline Risk Register Save an immutable architecture checkpoint before New clean project template started. No prior project or output is attached. BARC binds findings to an immutable revision and disposes so later edits cannot silently change the architecture being

Step	Activity	Visible GUI context
3	Expand Phased Physical Realization inputs Stage: Define Cumulative device, port and link requirements displayed. This allows you to phase the deployment of your GPU cluster in phases, e.g 8 B300 s first, then expand to 16 B300s, then to 128 – the final target count.	

Step	Activity	Visible GUI context
4	Load preset and review input values Stage: Define Map the ACME Asia v1.1 intake through ordinary visible controls: 1,024 HGX B300 GPUs, Quantum-X800 east-west, converged Spectrum-X/WEKA, SN5610, phased populations, Rafay SaaS, open external bandwidth and all review stages.	The screenshot displays the 'Neon AI Factory Architect' interface. The left sidebar contains configuration settings for 'Lintasarta' and 'premises data centre'. The main panel shows the 'ARCHITECTURE WORKFLOW' in the 'Define / active' stage. The workflow steps are: 1. Define (active), 2. Generate (not started), 3. Review Baseline Requirements (not started), 4. Review Architecture Risks (not started), 5. Review Security (not started), and 6. Refine (not started). The right sidebar features 'ARCHITECTURE ALTERNATIVES' and 'PROJECT DELIVERY PLANNING COMPILER' sections, including options for 'Named design branches', 'Choose Preferred Design', and 'Indicative Delivery Schedule'.

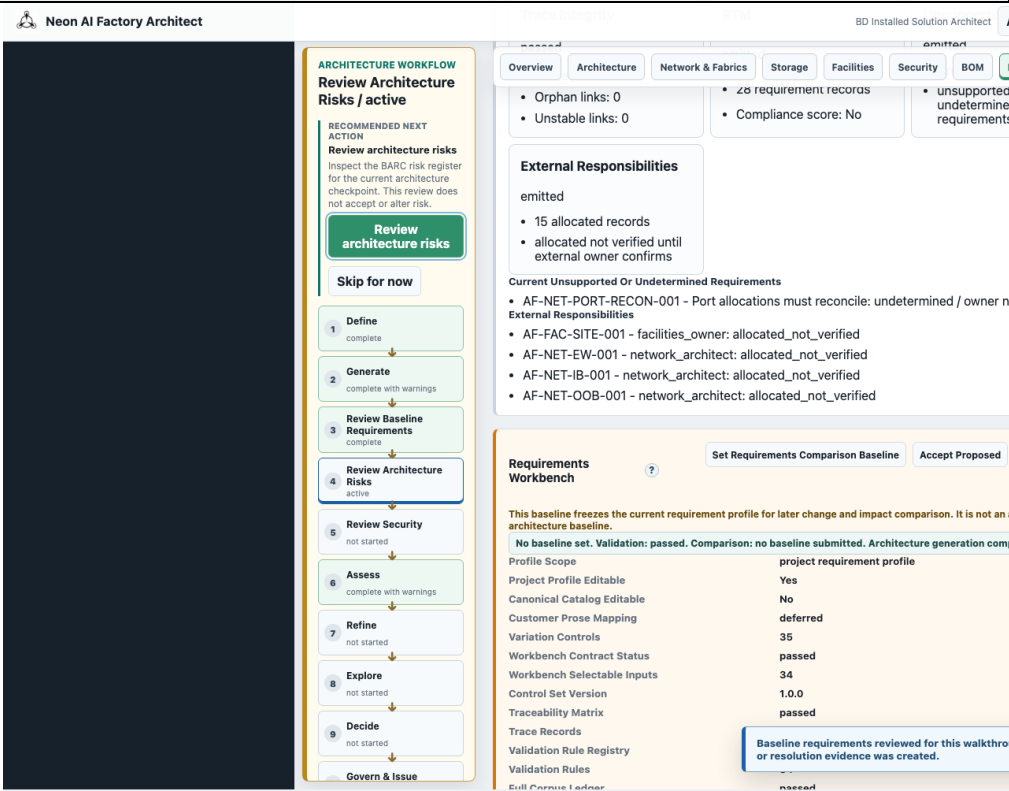
Step	Activity	Visible GUI context
5	Create Project and Compile Stage: Define / active Create one persistent project from these inputs and run its first server-backed compilation.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a sidebar contains configuration options for 'Customer' (Lintasarta), 'Region' (Indonesia on-premis), 'Target Design Maturity' (Production Candid), 'Intended Engineering Use' (Solution architect), 'Architecture Profile' (Standard / Enterprise reference architecture), 'Platform' (HGX B300), and 'Target GPU Count' (1024). Below these are sections for 'Spectrum-X Enterprise v1 anchors', 'Tenancy' (Unknown), 'Operating Model' (Unknown), 'Storage Model' (HPS - High Performance Storage), and 'Request storage vendor integration review' (checked). The main panel shows the 'ARCHITECTURE WORKFLOW' with a 'Define / active' stage. A 'Create Project and Compile' button is prominent. A vertical timeline on the right lists steps: 1. Define (active), 2. Generate (not started), 3. Review Baseline Requirements (not started), 4. Review Architecture Risks (not started), 5. Review Security (not started), and 6. Refine (not started). The right sidebar features tabs for 'Overview', 'Architecture', 'Network & Fabrics', 'Storage', 'Facilities', 'Security', and 'BOM'. The 'Architecture' tab is active, showing 'ARCHITECTURE ALTERNATIVES' and 'Named design branches'. It includes a 'Choose Preferred Design' button and a 'How comparison becomes ready' section. Below this is a 'PROJECT DELIVERY PLANNING COMPILER' section with an 'Indicative Delivery Schedule' and a 'Calculate Indicative Schedule' button. A tooltip indicates 'New clean project template started. No prior requirements attached.'

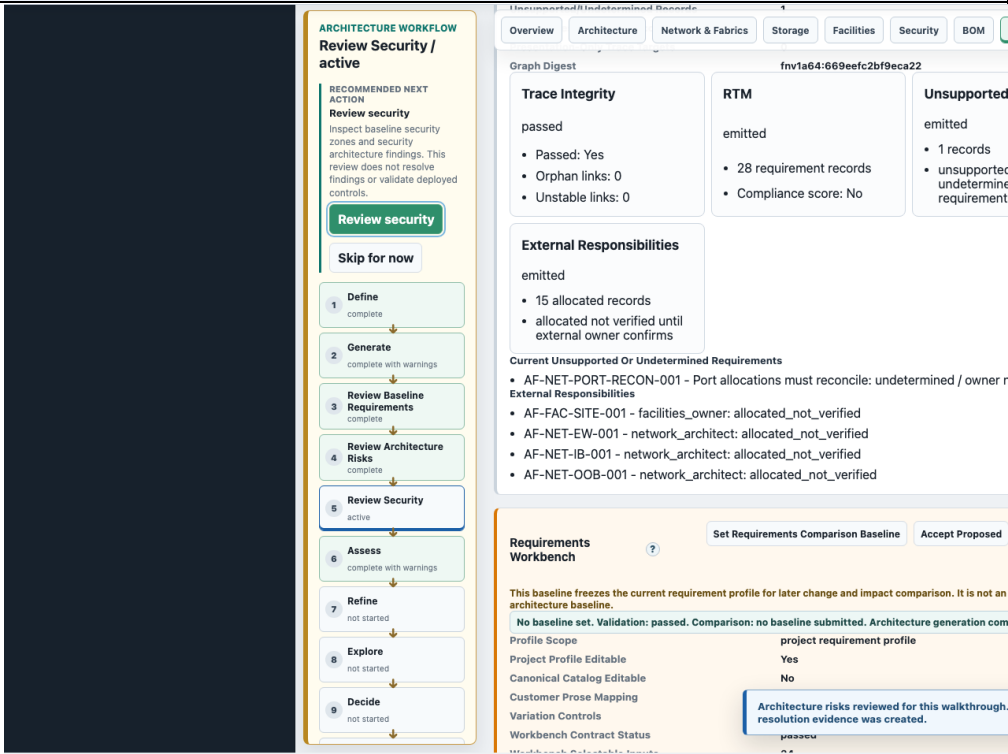
Step	Activity	Visible GUI context
6	Observe completed architecture generation Stage: Generate Visible RUN-000001 result rendered after Create Project and Compile	

Step	Activity	Visible GUI context
7	Review planning BOM Stage: Generate BOM skeleton and preliminary engineering quantities reviewed through the visible domain navigation. The BoM Skeleton provides a summary of the core equipment needed to build this architecture.	The screenshot displays the Neon AI Factory Architect interface. On the left, a dark sidebar contains the 'ARCHITECTURE WORKFLOW' with steps 1 through 8. Step 3, 'Review Baseline Requirements', is highlighted as 'active'. The main panel shows the 'BOM Skeleton' for 'BOM-OPT-HGX-B300-InfiniBand-WEKA-COR'. It includes a table of attributes such as BOM ID, Status, Authoritative, Commercial BOM, Procurement Ready, SME Mapping Validation, Artifact Type, Topology Mapping Status, Logical-to-Physical Mapping, Currency, and Pricing Included. Below this, there are two sections: 'HGX B300 compute nodes' and 'HGX B300 scalable units', each with a table of detailed specifications including Item ID, Quantity, Unit, Quantity Basis, Sizing Basis, Planning Level, Installed Quantity, Procurement Quantity, Quantity Classification, Planning Allowance, Dependency Reason, Evidence Class, Exclude From Cost Rollup, and SKU Status.

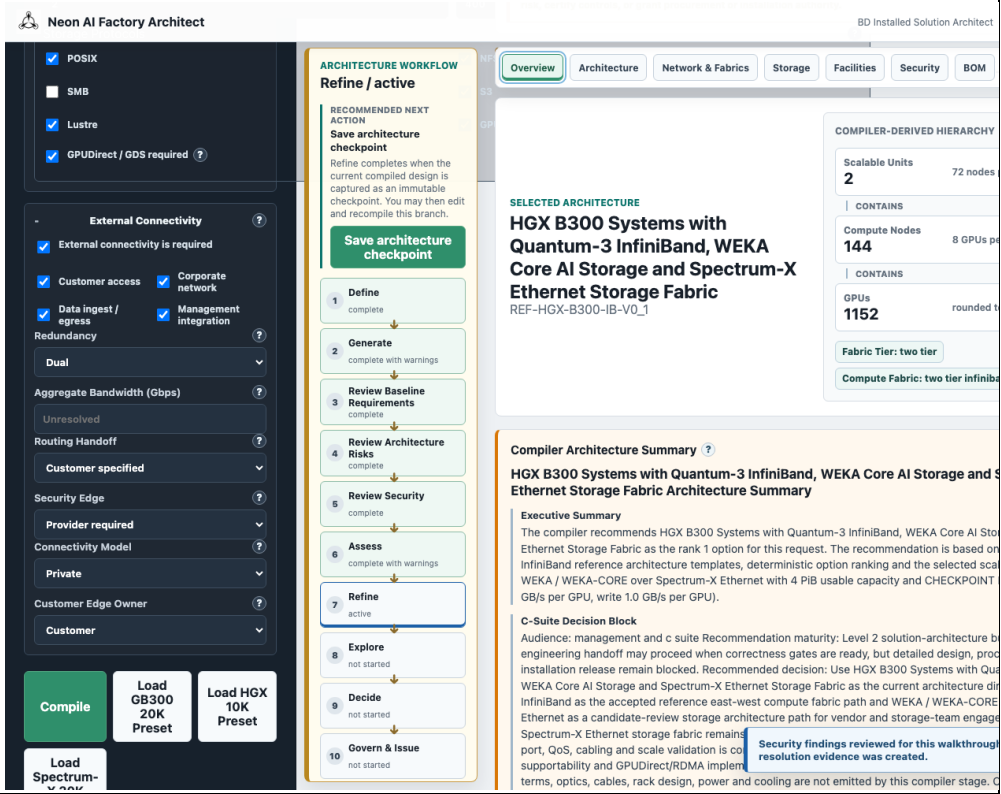
Step	Activity	Visible GUI context
8	Review and download Clos engineering SVGs Stage: Generate Use the phase and detail-level filters to review and download all 81 generated Quantum-X800 and Spectrum-X engineering views. Use these to develop any further Clos network definitions you need.	The screenshot displays the Neon AI Factory Architect interface. On the left, the 'ARCHITECTURE WORKFLOW' sidebar shows a sequence of steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (active), 4. Review Architecture Risks (not started), 5. Review Security (not started), 6. Assess (complete with warnings), 7. Refine (not started), and 8. Explore (not started). A 'Review baseline requirements' button is highlighted. The main panel is titled 'Overall Phased AI Factory Physical Realization' and shows a comparison of 'Foundation', 'Expansion', and 'Target' states. The 'Foundation' section lists 8 HGX systems, 64 GPUs, and 12 WEKA backends. The 'Expansion' section lists 16 HGX systems, 128 GPUs, and 24 WEKA backends. The 'Target' section lists 128 HGX systems, 48 WEKA backends, and 255 devices. Below this, a detailed diagram shows the physical realization of the AI factory, including components like GPU Compute, Quantum-X800 East-West, Spectrum-X Service + Storage, and WEKA Storage. The diagram is color-coded: blue for workload, green for storage, and orange for management/control. A legend at the bottom explains the color coding. The interface also includes a search bar for canonical links and a 'Download all Clos SVGs' button.

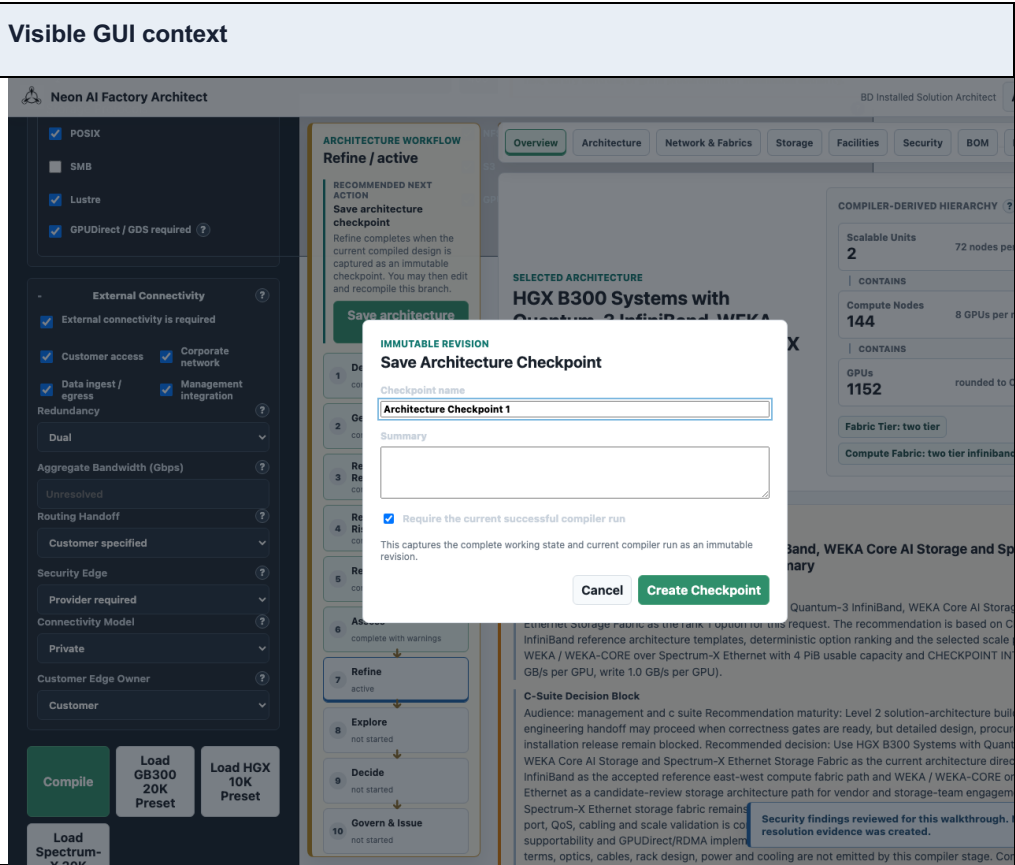
Step	Activity	Visible GUI context
9	Security / Detailed zones Stage: Assess Reference Architecture baseline (aka “RAC”) and Security Architecture (aka “SAC”) advisory analysis displayed as separate governed layers	The screenshot displays the Neon AI Factory Architect interface. On the left, a sidebar shows the 'ARCHITECTURE WORKFLOW' with steps 1 through 8. Step 3, 'Review Baseline Requirements', is currently active. The main content area is divided into two sections. The top section, 'Review Baseline Requirements / active', includes a 'RECOMMENDED NEXT ACTION' box with a 'Review baseline requirements' button and a 'Skip for now' button. The bottom section, 'BASELINE SECURITY ARCHITECTURE', shows 'Security Zones and Governed Crossings' with a 'passed / SECURITY-ZONES-DETAILED' status and buttons for 'Executive Overview' and 'Detailed Zones'. Below this is a 'Detailed Security Zones and Trust Crossings' diagram showing various zones like 'Compute Fabric Zone', 'External / Customer Zone', 'Management Zone', 'OOB Management Zone', 'Operations / Logging Zone', 'Platform Services Zone', 'Storage Zone', and 'Tenant Workload Zone'. A 'Downloaded 81 Clo' button is visible at the bottom right.

Step	Activity	Visible GUI context
10	Review baseline requirements Stage: Review Baseline Requirements / active Inspect supported, unresolved and unsupported requirements and their traceability. This review does not satisfy or change a requirement. This is an architecture Gap Analysis which you should use to plan out gap resolutions with your SME team and vendors.	 The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a vertical workflow bar shows steps from 'Define' to 'Govern & Issue'. Step 4, 'Review Architecture Risks', is highlighted as 'active'. The main panel is titled 'ARCHITECTURE WORKFLOW Review Architecture Risks / active'. It includes a 'RECOMMENDED NEXT ACTION' section with a 'Review architecture risks' button. Below this is a 'Skip for now' button. The right side of the interface shows a 'Requirements Workbench' with a table of requirements. The table has columns for 'Requirement ID', 'Requirement Description', 'Status', and 'Owner'. The requirements listed are: AF-NET-PORT-RECON-001 (Port allocations must reconcile: undetermined / owner not confirmed), AF-FAC-SITE-001 (facilities_owner: allocated_not_verified), AF-NET-EW-001 (network_architect: allocated_not_verified), AF-NET-IB-001 (network_architect: allocated_not_verified), and AF-NET-OOB-001 (network_architect: allocated_not_verified). A 'Requirements Workbench' section at the bottom shows a table with columns for 'Requirement ID', 'Requirement Description', 'Status', and 'Owner'. The requirements listed are: AF-NET-PORT-RECON-001 (Port allocations must reconcile: undetermined / owner not confirmed), AF-FAC-SITE-001 (facilities_owner: allocated_not_verified), AF-NET-EW-001 (network_architect: allocated_not_verified), AF-NET-IB-001 (network_architect: allocated_not_verified), and AF-NET-OOB-001 (network_architect: allocated_not_verified).

Step	Activity	Visible GUI context
11	Review architecture risks Stage: Review Architecture Risks / active Inspect the BARC risk register for the current architecture checkpoint. This review does not accept or alter risk, it captures the Solution Architect's assessment of the risks generated by Neon's risk analysis module.	 The screenshot displays the Neon AI Factory Architect interface during the 'Review Architecture Risks' step. The left sidebar shows a workflow diagram with steps 1 through 9, where 'Review Security' is the current active step. The main content area features a 'Review security' button and a 'Skip for now' button. The right-hand panel provides a 'Graph Digest' with sections for 'Trace Integrity' (passed), 'RTM' (emitted), and 'Unsupported' (emitted). Below these, 'External Responsibilities' are listed as emitted. A 'Requirements Workbench' section at the bottom shows a table with columns for 'Profile Scope' and 'project requirement profile', with rows for 'Project Profile Editable', 'Canonical Catalog Editable', 'Customer Prose Mapping', 'Variation Controls', and 'Workbench Contract Status'. A tooltip indicates 'Architecture risks reviewed for this walkthrough, resolution evidence was created.'

Step	Activity	Visible GUI context
12	Review security Stage: Review Security / active Inspect baseline security zones and security architecture findings. Use this to submit a security architecture specification to your Security SME for complete and validate.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a sidebar shows the 'ARCHITECTURE WORKFLOW' with steps 1 through 10. Step 7, 'Refine', is currently active. The main content area shows a list of findings under the 'Security' tab, including items like 'SAC-FINDING-094: Administrative actions require an audit/telemetry handoff' and 'SAC-FINDING-097: Administrative identity roles must be distinct from ordinary user/workload identities'. A 'Save architecture checkpoint' button is visible. The bottom section, 'BASELINE SECURITY ARCHITECTURE', shows 'Security Zones and Governed Crossings' with a diagram of zones (Compute Fabric Zone, External / Customer Zone, Management Zone) and a note: 'Security findings reviewed for this walkthrough, resolution evidence was created.'

Step	Activity	Visible GUI context
13	Confirm Requirements / Risks / Security reviews complete Stage: Review findings All three reviews completed through their visible Review actions. Skip is optional but not advised.	 The screenshot displays the Neon AI Factory Architect interface. On the left, a sidebar contains configuration sections: 'External Connectivity' with checkboxes for POSIX, SMB, Lustre, and GPUDirect; 'External Connectivity' with a dropdown for 'Dual'; 'Aggregate Bandwidth (Gbps)' with a dropdown for 'Unresolved'; 'Routing Handoff' with a dropdown for 'Customer specified'; 'Security Edge' with a dropdown for 'Provider required'; 'Connectivity Model' with a dropdown for 'Private'; and 'Customer Edge Owner' with a dropdown for 'Customer'. Below these are buttons for 'Compile', 'Load GB300 20K Preset', 'Load HGX 10K Preset', and 'Load Spectrum-X Preset'. The central pane shows the 'ARCHITECTURE WORKFLOW' with steps 1-10. Step 7, 'Refine', is active. The right pane shows the 'SELECTED ARCHITECTURE' as 'HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric' and a 'Compiler Architecture Summary'.

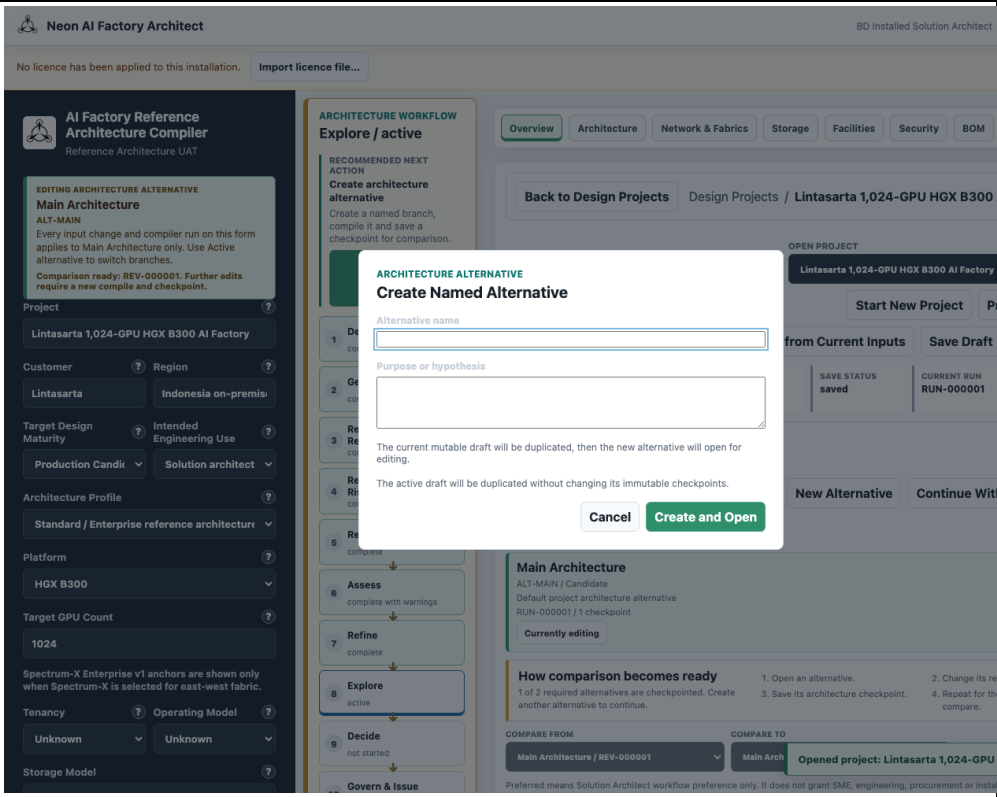
Step	Activity	Visible GUI context
14	Save architecture checkpoint Stage: Refine / active Refine completes when the current compiled design is captured as an immutable checkpoint. You may then edit and recompile this branch.	

Step	Activity	Visible GUI context
15	Confirm saved checkpoint: ACME Asia 1,024 GPU Physical primary architecture Stage: Refine Checkpoint dialog closed after successful persistence	The screenshot displays the Neon AI Factory Architect interface. On the left, a sidebar contains configuration sections: 'External Connectivity' (with checkboxes for POSIX, SMB, Lustre, and GPUDirect / GDS required), 'External Connectivity' (with checkboxes for Customer access, Corporate network, Data ingest / egress, and Management integration), 'Aggregate Bandwidth (Gbps)' (set to Unresolved), 'Routing Handoff' (set to Customer specified), 'Security Edge' (set to Provider required), 'Connectivity Model' (set to Private), and 'Customer Edge Owner' (set to Customer). Below these are buttons for 'Compile', 'Load GB300 20K Preset', 'Load HGX 10K Preset', and 'Load Spectrum-X 20K Preset'. The main area features an 'ARCHITECTURE WORKFLOW' section with a progress bar showing steps 1 through 10. Step 8, 'Explore', is currently active. The right panel shows the 'SELECTED ARCHITECTURE' as 'HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric' (REF-HGX-B300-IB-V0_1). Below this is a 'COMPILER-DERIVED HIERARCHY' table with columns for Scalable Units, Compute Nodes, GPUs, and Fabric Tier. The table shows 2 Scalable Units, 144 Compute Nodes, 1152 GPUs, and a two-tier fabric. An 'Executive Summary' section provides details on the recommendation, including a 'C-Suite Decision Block' and a 'Checkpoint saved' message.

Step	Activity	Visible GUI context												
16	Record likelihood, impact and optional review note Stage: Review Architecture Risks Risk assessment saved against the primary checkpoint selected later in the journey	Neon AI Factory Architect Usable Capacity 4 Performance Profile Checkpoint intensive - ADVANCED STORAGE SIZING & PROTOCOLS Active GPU Fraction 0.1 Read GB/s per GPU e.g. 2.5 Aggregate Read GB/s 250000 Metadata Creates/s e.g. 18000000 Capacity Reserve Fraction e.g. 0.20 Frontend Plane Count 2 Storage Protocols ☒ POSIX ☐ SMB ☒ Lustre ☒ GPUDirect / GDS required External Connectivity ☒ External connectivity is required ☒ Customer access ☒ Corporate network ARCHITECTURE WORKFLOW Explore / active RECOMMENDED NEXT ACTION Create architecture alternative Create a named branch, compile it and save a checkpoint for comparison Create architecture alternative 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore active 9 Decide not started 10 Govern & Issue not started BD Installed Solution Architect Overview Architecture Network & Fabrics Storage Facilities Security BOM Ready None Partial None Unresolved 7 Generate a document to create review downloads. Customer Issue Approval 7 Generate an immutable document before approval. Not available 7 BASLINE ARCHITECTURE RISK COMPILER Architecture Baseline Risk Register 7 The SME-approved catalog is available for architecture advisory publication. BARC binds findings to an immutable revision and digest so later edits cannot silently change the architecture assessed. 7 Evaluate Baseline Risks 7 <table><tr><td>Revision</td><td>REV-000001</td><td>Findings</td><td>66</td></tr><tr><td>Coverage</td><td>incomplete</td><td>Coverage Gaps</td><td>1</td></tr><tr><td>Release Status</td><td>approved for advisory use</td><td>Stale Assessments</td><td>0</td></tr></table> 7 BARC-COM-001 · GPU compute capacity has inadequate service headroom BARC-COM-002 · Compute-node failure creates excessive workload blast radius BARC-COM-003 · Platform compatibility is not governed end to end BARC-COM-004 · Compute serviceability causes extended capacity loss BARC-HGB-001 · HGX platform integration varies by OEM system BARC-HGB-002 · HGX host architecture constrains GPU availability BARC-HGB-003 · HGX maintenance path is not standardised across suppliers BARC-XDM-001 · Compute recovery creates a storage or surge Risk assessment saved for assessment	Revision	REV-000001	Findings	66	Coverage	incomplete	Coverage Gaps	1	Release Status	approved for advisory use	Stale Assessments	0
Revision	REV-000001	Findings	66											
Coverage	incomplete	Coverage Gaps	1											
Release Status	approved for advisory use	Stale Assessments	0											

Step	Activity	Visible GUI context
17	Browser refresh Stage: Refine Authenticated project and run restored	Neon AI Factory Architect ARCHITECTURE WORKFLOW Explore / active RECOMMENDED NEXT ACTION Create architecture alternative Create a named branch, compile it and save a checkpoint for comparison. Create architecture alternative 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore active 9 Decide not started 10 Govern & Issue not started BD Installed Solution Architect OverviewArchitectureNetwork & FabricsStorageFacilitiesSecurityBOMR COMPILER-DERIVED HIERARCHY ? Scalable Units272 nodes per CONTAINS Compute Nodes1448 GPUs per node CONTAINS GPUs1152rounded to 1152 Fabric Tier: two tier Compute Fabric: two tier infiniband SELECTED ARCHITECTURE HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric REF-HGX-B300-IB-V0_1 Compiler Architecture Summary ? HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric Architecture Summary Executive Summary The compiler recommends HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric as the rank 1 option for this request. The recommendation is based on CK InfiniBand reference architecture templates, deterministic option ranking and the selected scale parameters: 1152 GPUs / WEKA-CORE over Spectrum-X Ethernet with 4 PiB usable capacity and CHECKPOINT INTENSIVE workload (1.0 GB/s per GPU, write 1.0 GB/s per GPU). C-Suite Decision Block Audience: management and c suite Recommendation maturity: Level 2 solution-architecture build engineering handoff may proceed when correctness gates are ready, but detailed design, procure installation release remain blocked. Recommended decision: Use HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric as the current architecture direct reference. WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric as the current architecture direct reference. InfiniBand as the accepted reference east-west compute fabric path and WEKA / WEKA-CORE on Spectrum-X Ethernet as a candidate-review storage architecture path for vendor and storage-team engagement. Spectrum-X Ethernet storage fabric remains candidate-review/reference-use-only until detailed design, port, QoS, cabling and scale validation is complete. Supportability and GPUDirect/RDMA implementation is not yet defined. Session restored: Lintasarta 1,024-GPU HGX B300 Systems with Quantum-3 InfiniBand, WEKA Core AI Storage and Spectrum-X Ethernet Storage Fabric Architecture Summary. Terms, optics, cables, rack design, power and cooling are not emitted by this compiler stage. Compiler Architecture Summary

Step	Activity	Visible GUI context
18	Back to Design Projects / Open Stage: Refine Same persistent project reopened	Neon AI Factory Architect BD Installed Solution Architect No licence has been applied to this installation. Import licence file... AI Factory Reference Architecture Compiler Reference Architecture UAT EDITING ARCHITECTURE ALTERNATIVE Main Architecture ALT-MAIN Every input change and compiler run on this form applies to Main Architecture only. Use Active alternative to switch branches. Comparison ready: REV-000001. Further edits require a new compile and checkpoint. Project Lintasarta 1,024-GPU HGX B300 AI Factory Customer Lintasarta Region Indonesia on-premis Target Design Maturity Intended Engineering Use Production Candix Solution architect Architecture Profile Standard / Enterprise reference architecture Platform HGX B300 Target GPU Count 1024 Spectrum-X Enterprise v1 anchors are shown only when Spectrum-X is selected for east-west fabric. Tenancy Unknown Operating Model Unknown Storage Model ARCHITECTURE WORKFLOW Explore / active RECOMMENDED NEXT ACTION Create architecture alternative Create a named branch, compile it and save a checkpoint for comparison. Create architecture alternative 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore active 9 Decide not started 10 Govern & Issue Overview Architecture Network & Fabrics Storage Facilities Security BOM Back to Design Projects Design Projects / Lintasarta 1,024-GPU HGX B300 AI Factory OPEN PROJECT Lintasarta 1,024-GPU HGX B300 AI Factory (AI) Start New Project Project ARCHITECTURE WORKSPACE Lintasarta 1,024-GPU HGX B300 AI Factory AIF-PROJ-000001 / DRAFT-AIF-PROJ-000001 / version 2 Create from Current Inputs Save Draft ALTERNATIVE ALT-MAIN WORKING STATE DRAFT-AIF-PROJ-000001 BASE REVISION None SAVE STATUS saved CURRENT RUN RUN-000001 ARCHITECTURE ALTERNATIVES Named design branches ACTIVE ALTERNATIVE Main Architecture New Alternative Continue Witho Choose Preferred Design Main Architecture ALT-MAIN / Candidate Default project architecture alternative RUN-000001 / 1 checkpoint Currently editing How comparison becomes ready 1 of 2 required alternatives are checkpointed. Create another alternative to continue. 1. Open an alternative. 2. Change its requ 3. Save its architecture checkpoint. 4. Repeat for the o compare. COMPARE FROM Main Architecture / REV-000001 COMPARE TO Main Arch Opened project: Lintasarta 1,024-GPU HG Preferred means Solution Architect workflow preference only. It does not grant SME, engineering, procurement or installa

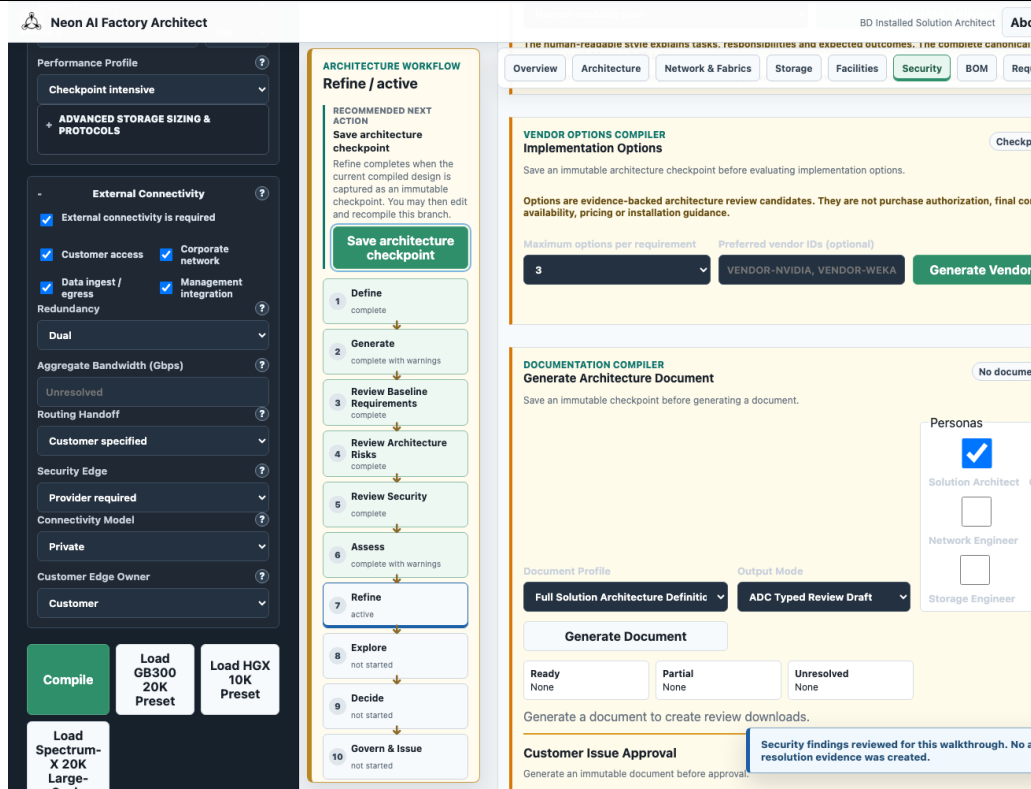
Step	Activity	Visible GUI context
19	Create architecture alternative Stage: Explore / active Create a named branch, compile it and save a checkpoint for comparison.	 The screenshot displays the Neon AI Factory Architect interface. A modal dialog titled 'ARCHITECTURE ALTERNATIVE Create Named Alternative' is open, featuring input fields for 'Alternative name' and 'Purpose or hypothesis', and 'Cancel' and 'Create and Open' buttons. The background interface includes a left sidebar with project settings (Project: Lintasarta 1,024-GPU HGX B300 AI Factory, Customer: Lintasarta, Target Design Maturity: Production Candidate, Solution architect), a central workflow pane with steps (Assess, Refine, Explore, Decide, Govern & Issue), and a right pane showing the 'Main Architecture' details and comparison options.

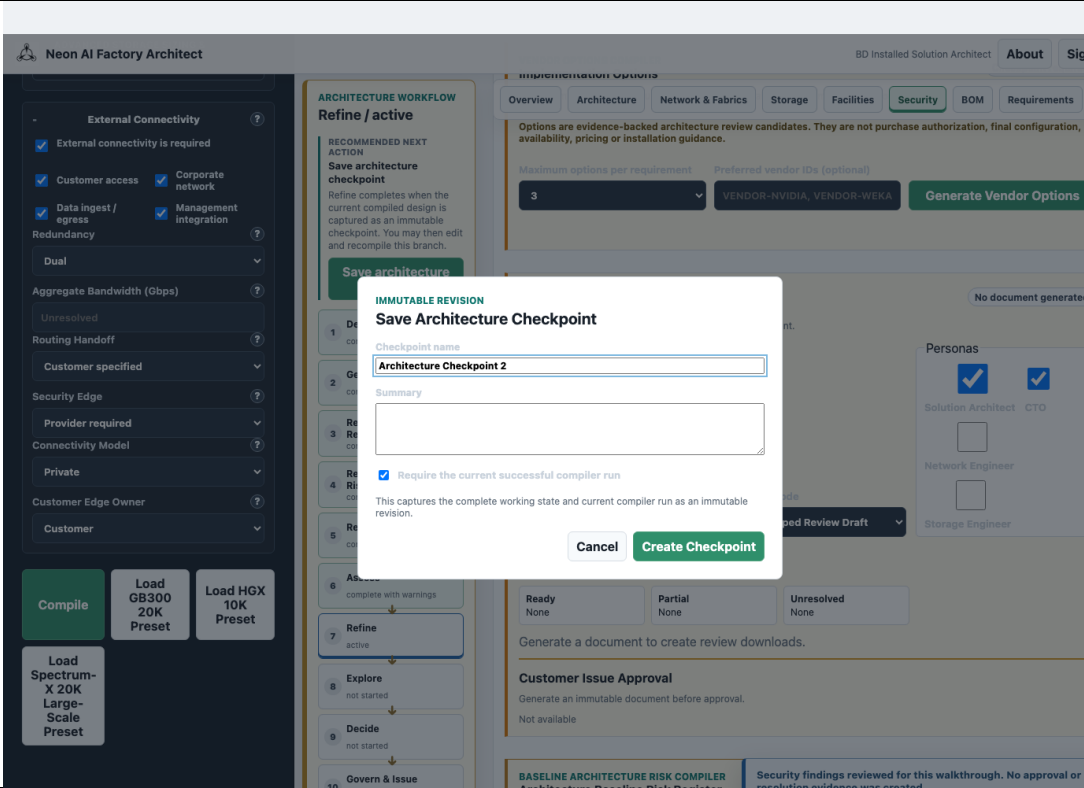
Step	Activity	Visible GUI context
20	Expand External Connectivity requirements Stage: Explore North-south connectivity inputs displayed.	The screenshot displays the Neon AI Factory Architect interface. On the left, a sidebar contains configuration sections: 'VAST Candidate Pattern' (Gen6 CBox + Ceres v2 60TB, VAST Demand Profile, NCP standard, VAST High Availability), 'Usable Capacity' (4, PIB), 'Performance Profile' (Checkpoint intensive), and 'ADVANCED STORAGE SIZING & PROTOCOLS'. Below these is the 'External Connectivity' section, which is expanded to show 'External connectivity is required' (checked), 'Customer access' (checked), 'Corporate network' (checked), 'Data ingest / egress Redundancy' (checked), 'Management integration' (checked), 'Dual' (selected), 'Aggregate Bandwidth (Gbps)' (Unresolved), 'Routing Handoff' (Customer specified), 'Security Edge' (Provider required), 'Connectivity Model' (Private), and 'Customer Edge Owner'. The central pane shows the 'ARCHITECTURE WORKFLOW' with steps 1-10. Step 7 'Refine' is active. The right pane shows the 'Project Delivery Plan' section with a 'Generate Delivery Plan' button, followed by the 'VENDOR OPTIONS COMPILER' and 'DOCUMENTATION COMPILER' sections. A notification at the bottom right states: 'Now editing Lintasarta 1,024 GPU Physical governed alternative. Change inputs, Compile, then Save Checkpoint.'

Step	Activity	Visible GUI context
21	Recompile changed inputs Stage: Refine / active Refresh all stale architecture outputs before continuing by clicking “Recompile changed inputs”	The screenshot displays the Neon AI Factory Architect interface. On the left, a dark sidebar contains configuration sections: 'VAST Candidate Pattern' (Gen8 CBox + Ceres v2 80TB), 'VAST Demand Profile' (NCP standard), 'VAST High Availability' (checked), 'Usable Capacity' (4.5, PIB), 'Performance Profile' (Checkpoint intensive, ADVANCED STORAGE SIZING & PROTOCOLS), and 'External Connectivity' (various checkboxes and dropdowns). The main area features an 'ARCHITECTURE WORKFLOW' section with a 'Refine / active' stage. A vertical sequence of steps is shown: 1. Define (complete), 2. Generate (requires recompile), 3. Review Baseline Requirements (not started), 4. Review Architecture Risks (not started), 5. Review Security (not started), 6. Assess (complete with warnings), 7. Refine (active), 8. Explore (not started), 9. Decide (not started), and 10. Govern & Issue (not started). A 'Recompile changed inputs' button is highlighted. Below the workflow is a 'WORKFLOW-OUTPUT-STATE' section. The right pane shows three panels: 'Project Delivery Plan' (with a 'Generate Delivery Plan' button), 'VENDOR OPTIONS COMPILER Implementation Options' (with a 'Generate Vendor Options' button), and 'DOCUMENTATION COMPILER Generate Architecture Document' (with a 'Generate Architecture Document' button). A 'Personas' sidebar on the far right shows 'Solution Architect' selected. A bottom status bar indicates 'Now editing Lintasarta 1,024 GPU Physical governance Change inputs, Compile, then Save Checkpoint.' and shows document profiles like 'Full Solution Architecture Definition' and 'ADC Typed Review Draft'.

Step	Activity	Visible GUI context
22	Review baseline requirements Stage: Review Baseline Requirements / active Inspect supported, unresolved and unsupported requirements and their traceability. This review does not satisfy or change a requirement.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a sidebar lists various configuration options under 'VAST Candidate Pattern', including 'Gen6 CBox + Ceres v2 60TB', 'VAST Demand Profile', 'NCP standard', 'VAST High Availability', 'Usable Capacity' (set to 4.5), 'Performance Profile', 'Checkpoint intensive', and 'ADVANCED STORAGE SIZING & PROTOCOLS'. Below this, 'External Connectivity' is configured with checkboxes for 'External connectivity is required', 'Customer access', 'Corporate network', 'Data ingest / egress', 'Management integration', and 'Redundancy' (set to 'Dual'). Other settings include 'Aggregate Bandwidth (Gbps)' (Unresolved), 'Routing Handoff' (Customer specified), 'Security Edge' (Provider required), 'Connectivity Model' (Private), and 'Customer Edge Owner'. The main panel shows the 'ARCHITECTURE WORKFLOW' with a 'Review Architecture Risks / active' step highlighted. A 'RECOMMENDED NEXT ACTION' box prompts the user to 'Review architecture risks'. A vertical progress bar on the right indicates the status of various workflow steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (complete), 4. Review Architecture Risks (active), 5. Review Security (not started), 6. Assess (complete with warnings), 7. Refine (not started), 8. Explore (not started), 9. Decide (not started), and 10. Govern & Issue. The right sidebar contains sections for 'Project Delivery Plan', 'VENDOR OPTIONS COMPILER Implementation Options', and 'DOCUMENTATION COMPILER Generate Architecture Document'. A 'Personas' dropdown is visible, showing 'Solution Architect' selected.

Step	Activity	Visible GUI context
23	Review architecture risks Stage: Review Architecture Risks / active Inspect the BARC risk register for the current architecture checkpoint. This review does not accept or alter risk, it allows you to review all the risks associated with your architecture configuration.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a sidebar contains configuration options for 'VASI High Availability', 'Usable Capacity' (set to 4.5), 'Performance Profile' (set to Checkpoint intensive), and 'ADVANCED STORAGE SIZING & PROTOCOLS'. Below these are 'External Connectivity' settings, including checkboxes for 'External connectivity is required', 'Customer access', 'Corporate network', 'Data Ingress / egress', and 'Management integration', as well as dropdowns for 'Redundancy' (Dual), 'Aggregate Bandwidth (Gbps)' (Unresolved), 'Routing Handoff' (Customer specified), 'Security Edge' (Provider required), 'Connectivity Model' (Private), and 'Customer Edge Owner' (Customer). The main panel shows the 'ARCHITECTURE WORKFLOW' with a sequence of steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (complete), 4. Review Architecture Risks (complete), 5. Review Security (active), 6. Assess (complete with warnings), 7. Refine (not started), 8. Explore (not started), and 9. Decide (not started). A 'RECOMMENDED NEXT ACTION' box highlights the 'Review security' step. To the right, the 'HUMAN-READABLE PLAN' section is visible, along with the 'VENDOR OPTIONS COMPILER' and 'DOCUMENTATION COMPILER' sections. The 'PERSONAS' sidebar on the far right shows 'Solution Architect' as the active role.

Step	Activity	Visible GUI context
24	Review security Stage: Review Security / active Inspect baseline security zones and security architecture findings. This review does not resolve findings or validate deployed controls.	

Step	Activity	Visible GUI context
25	Save architecture checkpoint Stage: Refine / active Refine completes when the current compiled design is captured as an immutable checkpoint. You may then edit and recompile this branch.	

Step	Activity	Visible GUI context
26	Confirm saved checkpoint: ACME Asia 1,024 GPU Physical alternative architecture Stage: Refine Checkpoint dialog closed after successful persistence	Neon AI Factory Architect ARCHITECTURE WORKFLOW Explore / active RECOMMENDED NEXT ACTION Compare checkpointed alternatives Two alternatives are ready. Run the semantic comparison before recording a preferred design. Compare checkpointed alternatives 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore active 9 Decide not started 10 Govern & Issue not started BD Installed Solution Architect OverviewArchitectureNetwork & FabricsStorageFacilitiesSecurityBOMReq BASLINE SECURITY ARCHITECTURE Security Zones and Governed Crossings passed / SECURITY-ZONES-DETAILED Executive OverviewDetailed Zones Detailed RAC baseline security zones and governed crossings with SAC advisory analysis. The presentation cannot s or validate deployed controls. Detailed Security Zones and Trust Crossings Baseline topology: RAC-selected architecture. Advisory analysis: SAC; no deployed enforcement is asserted. Compute Fabric Zone Compute zone External / Customer Zone External zone Management Zone Management zone OOB Management Zone Out zone Operations / Logging Zone Operations logging zone Platform Services Zone Platform services zone Storage Zone Storage zone Tenant Workload Zone Tenant zone SAC Security Architecture Analysis 30 advisory findings; 25 engineering handoffs; catalogue topology is not architecture-selected. SAC-FINDING-001 — High — advisory review required SAC-FINDING-004 — High — advisory review required SAC-FINDING-005 — High — advisory review required SAC-FINDING-006 — High — advisory review required SAC-FINDING-007 — Medium — advisory review required Showing 5 of 30 findings; the complete searchable register Checkpoint saved: Lintasarta 1,024 GPU Physical alt architecture / REV-000002 / digest sha256:fe837bd

Step	Activity	Visible GUI context
27	Generate Vendor Options / Record Architect Selection Stage: Explore Revision-bound implementation options reviewed through visible Workbench controls	Neon AI Factory Architect PHASED PHYSICAL REALIZATION WEKA v1.2 STORAGE EVALUATION Storage Role Core AI storage Storage Vendor WEKA VAST Sizing Evidence Do not run exact-reference evaluation VAST Candidate Evaluation Disabled VAST Candidate Pattern Gen6 CBox + Ceres v2 60TB VAST Demand Profile NCP standard VAST High Availability Usable Capacity 4.5 PIB Performance Profile Checkpoint intensive ADVANCED STORAGE SIZING & PROTOCOLS External Connectivity External connectivity is required Customer accessCorporate network ARCHITECTURE WORKFLOW Explore / active RECOMMENDED NEXT ACTION Compare checkpointed alternatives Two alternatives are ready. Run the semantic comparison before recording a preferred design. Compare checkpointed alternatives 1 Definecomplete 2 Generatecomplete with warnings 3 Review Baseline Requirementscomplete 4 Review Architecture Riskscomplete 5 Review Securitycomplete 6 Assesscomplete with warnings 7 Refinecomplete 8 Exploreactive 9 Decidenot started 10 Govern & Issuenot started BD Installed Solution Architect OverviewArchitectureNetwork & FabricsStorageFacilitiesSecurityBOM Calculate Indicative Schedule Project start date dd/mm/yyyy Working day 8 hours Day starts 09:00 AM Non-working dates YYYY-MM-DD, YYYY-MM-DD Working days ☒ Mon☒ Tue☒ Wed☒ Thu☒ Fri☐ Sat☐ Sun WorkstreamTask view All workstreamsAll tasks Project Delivery Plan Load the delivery plan, then generate a revision-bound planning review draft. Document style Human-readable plan Generate Delivery Plan The human-readable style explains tasks, responsibilities and expected outcomes. The complete canon remains available as a fallback. Review-draft publication only. Architecture approval, plan review and customer issue remain separate d VENDOR OPTIONS COMPILER Implementation Options Customer-visit Read-only architecture options review. Unresolved evidence and branch-specific sizing remain explicit; procur architecture mutation remain unauthorized. Options are evidence-backed architecture review candidates. They are not purchase authorization, fina availability, pricing or installation guidance. Vendor implementation options generated from t architecture revision. Maximum options per requirement 3 Vendor-NVIDIAVendor-WEKA Generate Ven

Step	Activity	Visible GUI context
28	Compare checkpointed alternatives Stage: Explore / active Two alternatives are ready. Run the semantic comparison before recording a preferred design.	The screenshot displays the Neon AI Factory Architect interface. On the left, a sidebar lists various configuration options under 'PHASED PHYSICAL REALIZATION', including 'WEKA V1.2 STORAGE EVALUATION', 'Storage Role' (set to 'Core AI storage'), 'Storage Vendor' (set to 'WEKA'), 'VAST Sizing Evidence' (set to 'Do not run exact-reference evaluation'), 'VAST Candidate Evaluation' (set to 'Disabled'), 'VAST Candidate Pattern' (set to 'Gen6 CBox + Ceres v2 60TB'), 'VAST Demand Profile' (set to 'NCP standard'), 'VAST High Availability' (checked), 'Usable Capacity' (set to '4.5'), 'Performance Profile' (set to 'Checkpoint intensive'), and 'ADVANCED STORAGE SIZING & PROTOCOLS'. Below these, 'External Connectivity' is also configured with 'External connectivity is required', 'Customer access', and 'Corporate network' all checked. The main panel shows the 'ARCHITECTURE WORKFLOW' with a sequence of steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (complete), 4. Review Architecture Risks (complete), 5. Review Security (complete), 6. Assess (complete with warnings), 7. Refine (complete), 8. Explore (active), 9. Decide (not started), and 10. Govern & Issue (not started). A green button labeled 'Compare checkpointed alternatives' is prominently displayed. The right sidebar contains sections for 'Calculate Indicative Schedule' (with fields for project start date, working day, and day starts), 'Working days' (with checkboxes for days of the week), 'Workstream' (set to 'All workstreams'), 'Task view' (set to 'All tasks'), 'Project Delivery Plan' (with a 'Generate Delivery Plan' button), and 'VENDOR OPTIONS COMPILER' (showing 'Implementation Options' and a 'Generate Vendor Implementation Options' button).

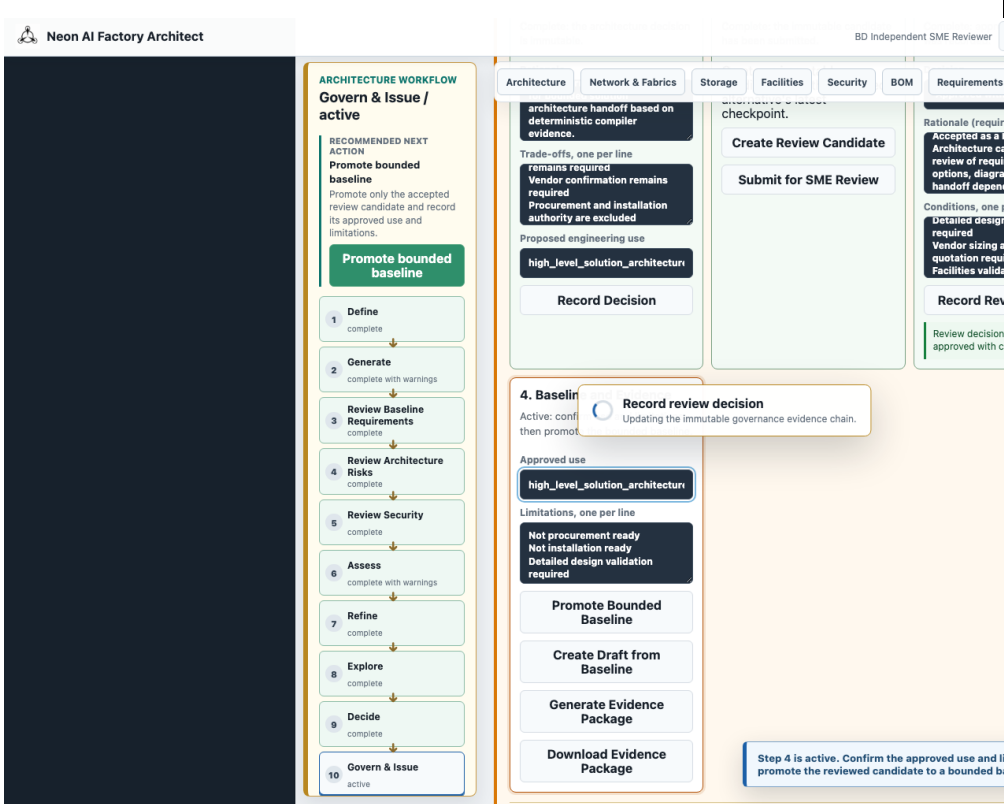
Step	Activity	Visible GUI context
29	Open Govern & Issue Stage: Govern & Issue / active The preferred design is recorded. Enter the architecture-decision rationale and select Record Decision. This information will be incorporated into the final Solution Architecture document.	The screenshot displays the Neon AI Factory Architect interface. On the left, a sidebar contains project details for 'Lintasarta 1,024-GPU HGX B300 AI Factory'. The main area shows the 'ARCHITECTURE WORKFLOW' with a vertical sequence of steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (complete), 4. Review Architecture Risks (complete), 5. Review Security (complete), 6. Assess (complete with warnings), 7. Refine (complete), 8. Explore (complete), 9. Decide (complete), and 10. Govern & Issue (active). A 'RECOMMENDED NEXT ACTION' box prompts the user to 'Open Govern & Issue' because the preferred design is recorded. The right-hand section, 'ARCHITECTURE WORKSPACE', shows the 'Lintasarta 1,024-GPU HGX B300 AI Factory' project with options to 'Start New Project', 'Create from Current Inputs', 'Save Draft', and 'Record Decision'. It also displays 'ARCHITECTURE ALTERNATIVES' with a table of alternatives (ALT-000001, DRAFT-AIF-PROJ-000001) and a 'Recording preferred design' dialog box.

Step	Activity	Visible GUI context
30	Record Decision Stage: Decide Active: enter rationale and select Record Decision. These decisions are a human record of authority regarding the selection of high-level architecture choices during this session and should appear in the Solution Architecture document Neon will generate at the end of the session.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a dark sidebar contains a vertical 'ARCHITECTURE WORKFLOW' with 10 steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (complete), 4. Review Architecture Risks (complete), 5. Review Security (complete), 6. Assess (complete with warnings), 7. Refine (complete), 8. Explore (complete), 9. Decide (complete), and 10. Govern & Issue (active). A green button 'Open Govern & Issue' is positioned above the workflow. The main panel is titled 'BD Installed Solution Architect' and shows the 'Govern & Issue' stage. It includes a 'Next: record architecture decision' instruction and a 'Step 1 is active' message. The workflow is divided into three columns: 1. Architecture Decision (Active: enter rationale and select Record Decision), 2. Review Candidate (Locked: record the architecture decision first), and 3. Authorised R (Locked: submit the candidate for review). Each column contains text boxes for rationale, trade-offs, and proposed engineering use, along with buttons like 'Record Decision', 'Create Review Candidate', and 'Submit for SME Review'. A 'Record Review' button is also visible at the bottom right.

Step	Activity	Visible GUI context
31	Create review candidate Stage: Govern & Issue / active Create an immutable review candidate from the preferred checkpoint and recorded decision.	Neon AI Factory Architect ARCHITECTURE WORKFLOW Govern & Issue / active RECOMMENDED NEXT ACTION Create review candidate Create an immutable review candidate from the preferred checkpoint and recorded decision. Create review candidate 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore complete 9 Decide complete 10 Govern & Issue active OverviewArchitectureNetwork & FabricsStorageFacilitiesSecurityBOMRe Govern & Issue ? Next: create review candidate. Each completed action is immutable and remains bounded to solution-architecture Step 2 is active. Create an immutable review candidate from the preferred checkpoint. 1. Architecture Decision Complete: the architecture decision is immutable. Rationale The preferred design is suitable for bounded solution architecture handoff based on deterministic compiler evidence. Trade-offs, one per line remains required Vendor confirmation remains required Procurement and installation authority are excluded Proposed engineering use high_level_solution_architecturi Record Decision 2. Review Candidate Active: create the immutable review candidate. Create an immutable candidate from the preferred alternative's latest checkpoint. Create Review Candidate Submit for SME Review 3. Authorised R Locked: submit the i candidate for review Decision Approved with co Rationale (required) Basis for the review Conditions, one per for conditional appr Detailed design va required Record Review Submit an immutab candidate before re decision. 4. Baseline and Evidence Locked: an approved review is required. Approved use high_level_solution_architecturi Limitations, one per line Not procurement ready Not installation ready Architecture decision recorded. Step 2 is ready: cre immutable review candidate.

Step	Activity	Visible GUI context
32	Submit review candidate Stage: Govern & Issue / active Open Govern & Issue and submit the immutable candidate for SME review.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a sidebar shows the 'ARCHITECTURE WORKFLOW' with 10 steps: 1. Define, 2. Generate, 3. Review Baseline Requirements, 4. Review Architecture Risks, 5. Review Security, 6. Assess, 7. Refine, 8. Explore, 9. Decide, and 10. Govern & Issue (active). The main content area is titled 'Govern & Issue / active' and contains three main sections: 1. Architecture Decision, 2. Review Candidate, and 3. Authorised Review. The 'Architecture Decision' section includes a 'Rationale' field with a text area, a 'Trade-offs' field with a text area, and a 'Proposed engineering use' field with a dropdown menu. The 'Review Candidate' section includes a 'Create Review Candidate' button and a 'Submit for SME Review' button. The 'Authorised Review' section includes a 'Decision' field with a dropdown menu, a 'Rationale (required)' field with a text area, and a 'Conditions (one per line (req for conditional approval))' field with a text area. The 'Record Review Decision' button is also visible. The top navigation bar includes 'Overview', 'Architecture', 'Network & Fabrics', 'Storage', 'Facilities', 'Security', 'BOM', and 'Requirements'.

Step	Activity	Visible GUI context
33	Record review decision Stage: Govern & Issue / active An authorised reviewer (either SME or the current Solution Architect) records a rationale-bound decision against the immutable candidate. Note: This could be a different assigned SME, or the same user of this session (architect) with “SME approver” permissions set in the administration interface.	The screenshot displays the 'Neon AI Factory Architect' interface. On the left, a dark sidebar contains a vertical list of 10 workflow steps: 1. Define (complete), 2. Generate (complete with warnings), 3. Review Baseline Requirements (complete), 4. Review Architecture Risks (complete), 5. Review Security (complete), 6. Assess (complete with warnings), 7. Refine (complete), 8. Explore (complete), 9. Decide (complete), and 10. Govern & Issue (active). The main panel is titled 'ARCHITECTURE WORKFLOW Govern & Issue / active'. It features a 'RECOMMENDED NEXT ACTION' section with a 'Record review decision' button. Below this, the 'Govern & Issue' section is active, showing three main steps: 1. Architecture Decision (Complete: the architecture decision is immutable. It includes a 'Rationale' field with a text area containing 'The preferred design is suitable for bounded solution architecture handoff based on deterministic compiler evidence.' and a 'Record Decision' button), 2. Review Candidate (Complete: the immutable candidate has been submitted. It includes a 'Create Review Candidate' button and a 'Submit for SME Review' button), and 3. Authorised Review (Active: record the authorised review decision, rationale, and any conditions or required actions. It includes a 'Record Review' button and a text area for 'Enter the rationale for decision.'). A top navigation bar includes tabs for Architecture, Network & Fabrics, Storage, Facilities, Security, BOM, and Requirements. A right sidebar shows a 'BD Independent SME Reviewer' profile and a 'record review decision' button.

Step	Activity	Visible GUI context
34	Promote bounded baseline Stage: Govern & Issue / active Promote only the accepted review candidate and record its approved use and limitations.	

Step	Activity	Visible GUI context																				
35	Regenerate Vendor Options for approved baseline Stage: Govern & Issue Implementation options rebound to the exact approved baseline revision before publication	Neon AI Factory Architect ADVANCED STORAGE SIZING & PROTOCOLS External Connectivity External connectivity is required Customer access Data ingest / egress Redundancy Dual Aggregate Bandwidth (Gbps) Unresolved Routing Handoff Customer specified Security Edge Provider required Connectivity Model Private Customer Edge Owner Customer Compile Load GB300 20K Preset Load HGX 10K Preset Load Spectrum-X 20K Large-Scale Preset ARCHITECTURE WORKFLOW Govern & Issue / active RECOMMENDED NEXT ACTION Generate evidence package Generate the validated export from the immutable baseline. Generate evidence package 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore complete 9 Decide complete 10 Govern & Issue active WF-GOVERN-BASELINE- BD Installed Solution Architect Architecture Network & Fabrics Storage Facilities Security BOM Requirements Load the delivery plan, then generate a revision-bound planning review draft. Document style Human-readable plan Generate Deliverable The human-readable style explains tasks, responsibilities and expected outcomes. The complete remains available as a fallback. Review-draft publication only. Architecture approval, plan review and customer issue remain separate. VENDOR OPTIONS COMPILER Implementation Options Read-only architecture options review. Unresolved evidence and branch-specific sizing remain explicit; architecture mutation remain unauthorized. Options are evidence-backed architecture review candidates. They are not purchase authorization availability, pricing or installation guidance. Maximum options per requirement Preferred vendor IDs (optional) 3 VENDOR-NVIDIA, VENDOR-WEKA Generate Executive Vendor Options Summary <table><tr><th>Architecture area</th><th>Current architecture</th><th>Market comparison</th><th></th></tr><tr><td>Compute</td><td>NVIDIA GB300 NVL72</td><td>No alternative architecture option represented</td><td>Tracked by customer</td></tr><tr><td>Network</td><td>Compatible implementation: NVIDIA Spectrum-4 SN5600</td><td>Arista 7060X6-64PE, Cisco N9364E-SG2-O, NVIDIA Quantum-X800 / Q3400 family</td><td>Generated by user</td></tr><tr><td>Optical Connectivity</td><td>Architecture requirement represented; implementation disposition pending</td><td>No alternative architecture option represented</td><td>Generated by user</td></tr><tr><td>Storage</td><td>VAST Data Platform; Details: Unresolved - engineering input required - VAST Data</td><td>DDN A1/HPC storage platform, WEKA Data</td><td>Tracked by customer</td></tr></table> Vendor implementation options generated for architecture revision.	Architecture area	Current architecture	Market comparison		Compute	NVIDIA GB300 NVL72	No alternative architecture option represented	Tracked by customer	Network	Compatible implementation: NVIDIA Spectrum-4 SN5600	Arista 7060X6-64PE, Cisco N9364E-SG2-O, NVIDIA Quantum-X800 / Q3400 family	Generated by user	Optical Connectivity	Architecture requirement represented; implementation disposition pending	No alternative architecture option represented	Generated by user	Storage	VAST Data Platform; Details: Unresolved - engineering input required - VAST Data	DDN A1/HPC storage platform, WEKA Data	Tracked by customer
Architecture area	Current architecture	Market comparison																				
Compute	NVIDIA GB300 NVL72	No alternative architecture option represented	Tracked by customer																			
Network	Compatible implementation: NVIDIA Spectrum-4 SN5600	Arista 7060X6-64PE, Cisco N9364E-SG2-O, NVIDIA Quantum-X800 / Q3400 family	Generated by user																			
Optical Connectivity	Architecture requirement represented; implementation disposition pending	No alternative architecture option represented	Generated by user																			
Storage	VAST Data Platform; Details: Unresolved - engineering input required - VAST Data	DDN A1/HPC storage platform, WEKA Data	Tracked by customer																			

Step	Activity	Visible GUI context																				
36	Generate evidence package Stage: Govern & Issue / active Generate the validated export from the immutable baseline.	Neon AI Factory Architect ADVANCED STORAGE SIZING & PROTOCOLS External Connectivity External connectivity is required Customer access Corporate network Data ingest / egress Management integration Redundancy Dual Aggregate Bandwidth (Gbps) Unresolved Routing Handoff Customer specified Security Edge Provider required Connectivity Model Private Customer Edge Owner Customer Compile Load GB300 20K Preset Load HGX 10K Preset Load Spectrum-X 20K Large-Scale Preset ARCHITECTURE WORKFLOW Govern & Issue / active RECOMMENDED NEXT ACTION Generate evidence package Generate the validated export from the immutable baseline. Generate evidence package 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore complete 9 Decide complete 10 Govern & Issue active WF-GOVERN-BASELINE- BD Installed Solution Architect ArchitectureNetwork & FabricsStorageFacilitiesSecurityBOMRequirements Document style Human-readable plan Generate Delivery The human-readable style explains tasks, responsibilities and expected outcomes. The complete can remain available as a fallback. Review-draft publication only. Architecture approval, plan review and customer issue remain separate VENDOR OPTIONS COMPILER Implementation Options Read-only architecture options review. Unresolved evidence and branch-specific sizing remain explicit; product architecture mutation remain unauthorized. Options are evidence-backed architecture review candidates. They are not purchase authorization, fit availability, pricing or installation guidance. Maximum options per requirement Preferred vendor IDs (optional) 3VENDOR-NVIDIA, VENDOR-WEKAGenerate Ve Executive Vendor Options Summary <table><tr><th>Architecture area</th><th>Current architecture</th><th>Market comparison</th><th>Conc</th></tr><tr><td>Compute</td><td>NVIDIA GB300 NVL72</td><td>No alternative architecture option represented</td><td>The g catalog repre select basis</td></tr><tr><td>Network</td><td>Compatible implementation: NVIDIA Spectrum-4 SN5600</td><td>Arista 7060X6-64PE, Cisco N9364E-SG2-O, NVIDIA Quantum-X800 / Q3400 family</td><td>Gover are re furthe evide for sc</td></tr><tr><td>Optical Connectivity</td><td>Architecture requirement represented; implementation disposition pending</td><td>No alternative architecture option represented</td><td>Gover are re furthe evide</td></tr><tr><td>Storage</td><td>VAST Data Platform; Det engineering input required - VAST Data platform, WEKA Data retain</td><td></td><td></td></tr></table> Step 4 is active. Generate the validated evidence bounded baseline.	Architecture area	Current architecture	Market comparison	Conc	Compute	NVIDIA GB300 NVL72	No alternative architecture option represented	The g catalog repre select basis	Network	Compatible implementation: NVIDIA Spectrum-4 SN5600	Arista 7060X6-64PE, Cisco N9364E-SG2-O, NVIDIA Quantum-X800 / Q3400 family	Gover are re furthe evide for sc	Optical Connectivity	Architecture requirement represented; implementation disposition pending	No alternative architecture option represented	Gover are re furthe evide	Storage	VAST Data Platform; Det engineering input required - VAST Data platform, WEKA Data retain		
Architecture area	Current architecture	Market comparison	Conc																			
Compute	NVIDIA GB300 NVL72	No alternative architecture option represented	The g catalog repre select basis																			
Network	Compatible implementation: NVIDIA Spectrum-4 SN5600	Arista 7060X6-64PE, Cisco N9364E-SG2-O, NVIDIA Quantum-X800 / Q3400 family	Gover are re furthe evide for sc																			
Optical Connectivity	Architecture requirement represented; implementation disposition pending	No alternative architecture option represented	Gover are re furthe evide																			
Storage	VAST Data Platform; Det engineering input required - VAST Data platform, WEKA Data retain																					

Step	Activity	Visible GUI context
37	Download evidence package Stage: Govern & Issue / complete with warnings Download the current baseline package with its manifest and provenance. This can be used for support requests to support if there are issues with the architecture compilation.	Neon AI Factory Architect ARCHITECTURE WORKFLOW Govern & Issue / complete with warnings RECOMMENDED NEXT ACTION Download evidence package Download the current baseline package with its manifest and provenance. Download evidence package 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore complete 9 Decide complete 10 Govern & Issue complete with warnings BD Installed Solution Architect ArchitectureNetwork & FabricsStorageFacilitiesSecurityBOMRequirement Create Draft from Baseline Generate Evidence Package Download Evidence Package Architecture decision ADR-000001 ALT-MAIN / high_level_solution_architecture / The p suitable for bounded solution architecture handoff b deterministic compiler evidence. Review candidate REV-000003 Lintasarta 1,024-GPU HGX B300 AI Factory Review C REV-000001 / immutable Review Generate evidence package Updating the immutable governance evidence chain. tions Bounded baseline BASELINE-000001 solution architecture baseline / high_level_solution_a procurement and installation blocked Evidence package PRG-000001 aifactorycad-architecture-evidence-PKG-000001.zip / passed / sha256:ffe60f16b2480a30804ecb50fc6cde00ce3f1bf1eb61a2176 Local reviewer roles are a deterministic development profile, not enterprise identity assurance or non-r and packages remain non-procurement and non-installation authority. Security Engineering Handoff Actionable security obligations remain part of Handoff & Review. The Security page ov architecture presentation. Open Security Architecture - SAC-HANDOFF-001: OOB management must be represented as a distinct restricted security zone s user/workload access. - SAC-HANDOFF-004: Switch management interfaces must be isolated from workload and user acce - SAC-HANDOFF-005: User-plane reachability - SAC-HANDOFF-006: Any OOB route handoff management exposure. - SAC-HANDOFF-010: OOB administrative access and device-management events require a security The governance chain is complete. Download t package.

Step	Activity	Visible GUI context
38	Generate and download Executive Architecture Brief Stage: Govern & Issue Generate, then download the Executive architecture brief , Full Solution Architecture brief in JSON, Markdown, DOCX and PDF formats for further review, customization and collaboration.	ARCHITECTURE WORKFLOW Govern & Issue / complete with warnings RECOMMENDED NEXT ACTION Download evidence package Download the current baseline package with its manifest and provenance. Download evidence package 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore complete 9 Decide complete 10 Govern & Issue complete with warnings BD Installed Solution Architect network & FabricsStorageFacilitiesSecurityBOMRequirementsHandoff & Review DOCUMENTATION COMPILER Generate Architecture Document Ready to generate from approved baseline BASELINE-000001, revision REV-000003. Architecture approval and approval remain separate. The Architecture view currently shows REV-000002; this document will reproduce the 000003. Approve a new baseline before documenting the current workspace revision. Last generated: 2026-04-24 facts. Personas ☒ Solution Architect ☐ Network Engineers ☐ Storage Engineers Document Profile Executive Architecture Brief Output Mode ADC Typed Review Draft Generate Document Ready compute platform, facilities, network fabric, procurement, requirements compliance, security architecture, storage architecture Partial None Unresolved operations Download Review Draft JSON Download Review Draft MARKDOWN Download Review Draft DOCX Download Review Draft PDF Customer Issue Approval Generation DOC-GEN-000002 · revision REV-000003 · baseline BASELINE-000001 · digest sha256:29a3b109b7a7b8fe31bcb891490a6208ce9df01297640b51addf5ca553a8834 Downloadable review draft. Customer issue remains withheld until an Architecture Approver approves this example. BASLINE ARCHITECTURE RISK COMPILER Architecture Baseline Risk Register Evaluate immutable checkpoint REV-000003. Document generated:

Step	Activity	Visible GUI context
39	Generate and download Security Architecture Report Stage: Govern & Issue Download the Security Report in JSON, Markdown, DOCX and PDF formats for further review, customization and collaboration.	Neon AI Factory Architect ARCHITECTURE WORKFLOW Govern & Issue / complete with warnings RECOMMENDED NEXT ACTION Download evidence package Download the current baseline package with its manifest and provenance. Download evidence package 1 Define complete 2 Generate complete with warnings 3 Review Baseline Requirements complete 4 Review Architecture Risks complete 5 Review Security complete 6 Assess complete with warnings 7 Refine complete 8 Explore complete 9 Decide complete 10 Govern & Issue complete with warnings BD Installed Solution Architect work & FabricsStorageFacilitiesSecurityBOMRequirementsHandoff & Review DOCUMENTATION COMPILER Generate Architecture Document Ready to generate from approved baseline BASELINE-000001, revision REV-000003. Architecture approval remain separate. The Architecture view currently shows REV-000002; this document will reproduce 000003. Approve a new baseline before documenting the current workspace revision. Last generated: 24 facts. Personas Document Profile Security Architecture Report ADC Typed Review Draft Generate Document Ready compute platform, facilities, network fabric, procurement, requirements compliance, security architecture Partial None Unresolved operations Download Review Draft JSON Download Review Draft MARKDOWN Download Review Draft DOCX Download Review Draft PDF Customer Issue Approval Generation DOC-GEN-000003 - revision REV-000003 - baseline BASELINE-000001 - digest sha256-2cda1f7eeb14f5ba5ba89229665e5db03bf58877a5714a71fbace18f44c2af62 Downloadable review draft. Customer issue remains withheld until an Architecture Approver approves the BASILINE ARCHITECTURE RISK COMPILER Architecture Baseline Risk Register Evaluate immutable checkpoint REV-000003. Document generate