This page intentionally left blank

Hands-on binary (de)obfuscation

Arnau Gàmez i Montolio

EuskalHack Security Congress VII - June 22, 2024 - Donostia

About

Arnau Gàmez i Montolio

Hacker, Reverse Engineer & Mathematician

Occupation

- Senior Expert Security Engineer @ Activision
- Founder, Researcher & Trainer @ Fura Labs
- PhD @ City, University of London

Contact

arnaugamez.com

Introduction

Software protection landscape

Context

Context

Protection against Man-At-The-End (MATE) attacks.

The attacker has an instance of the program and completely controls the environment where it is executed.

Protection against end users

Protection against end users

Technical

- Obfuscation
- Cryptography
- Server-side execution
- Trusted execution environment (TEE)
- Device attestation
- ...

Legal

- Lawyers
- Luck
    - Jurisdiction
    - Adversary's strength
- Patience
- ...

Obfuscation

Transform a (part of a) program P into a functionally equivalent (part of a) program P' which is harder to analyze and extract information from than P.

$$P \longrightarrow \boxed{\text{Obfuscation}} \longrightarrow P'$$

Obfuscation

Transform a (part of a) program P into a functionally equivalent (part of a) program P' which is harder to analyze and extract information from than P.

$$P \longrightarrow \boxed{\text{Obfuscation}} \longrightarrow P'$$

Motivation

~~Prevent~~ complicate reverse engineering.

Presence

Presence

Commercial software:

- Intellectual property
- Digital Rights Management (DRM)
- (Anti-)cheating

Presence

Commercial software:

- Intellectual property
- Digital Rights Management (DRM)
- (Anti-)cheating

Malware (mostly obfuscation):

- Avoid automatic signature detection
- Slow down analysis → time → money

Methodology

Apply semantics-preserving transformations to data flow procedures and control flow structures.

Methodology

Apply semantics-preserving transformations to data flow procedures and control flow structures.

- At different abstraction levels
    - Source code
    - Intermediate representation
    - Assembly listing
    - Compiled binary

Methodology

Apply semantics-preserving transformations to data flow procedures and control flow structures.

- At different abstraction levels
  - Source code
  - Intermediate representation
  - Assembly listing
  - Compiled binary
- At different target units
  - Whole program
  - Function
  - Basic block
  - Instruction

Methodology

Apply semantics-preserving transformations to data flow procedures and control flow structures.

- At different abstraction levels
  - Source code
  - Intermediate representation
  - Assembly listing
  - Compiled binary
- At different target units
  - Whole program
  - Function
  - Basic block
  - Instruction

Remark: Several *weak* techniques can be combined to create *hard* obfuscation transformations.

Deobfuscation

Transform an obfuscated (part of a) program P' into a (part of a) program P'' which is easier to analyze and extract information from than P'.

$$P'' \longleftarrow \boxed{\text{Deobfuscation}} \longleftarrow P'$$

Deobfuscation

Transform an obfuscated (part of a) program P' into a (part of a) program P'' which is easier to analyze and extract information from than P'.

$$P'' \longleftarrow \boxed{\text{Deobfuscation}} \longleftarrow P'$$

Ideally $P'' \approx P$, but this is rarely the case

- Lack of access to original program P
- Interest in specific parts rather than whole program
- Interest in understanding rather than rebuilding

Preliminary

SMT

Satisfiability Modulo Theories (SMT)

- **S**atisfiability (SAT): determine if a (boolean) formula can be satisfied (can be true)
- **M**odulo: take into account (not only boolean formulas but also)...
- **T**heories: ...integer numbers, real numbers, floating point, **bit vectors**, and more

Satisfiability Modulo Theories (SMT)

- **S**atisfiability (SAT): determine if a (boolean) formula can be satisfied (can be true)
- **M**odulo: take into account (not only boolean formulas but also)...
- **T**heories: ...integer numbers, real numbers, floating point, **bit vectors**, and more

SMT solver

From a very practical standpoint: a *magic black-box* that can only answer a very simple question.

Question

Given some variables of some type, and some constraints on these variables:

- Is there any variable assignment that makes the set of constraints satisfiable, i.e. such that (all) the constraints hold true?

Question

Given some variables of some type, and some constraints on these variables:

- Is there any variable assignment that makes the set of constraints satisfiable, i.e. such that (all) the constraints hold true?

Outcomes

- **SAT**: there is a variable assignment that makes all the constraints hold true.
    - It will actually find a model, which is a particular solution (a concrete variable assignment)
- **UNSAT**: there is NO variable assignment that makes all the constraints hold true.
- **UNKNOWN**: unable to answer the question (usually due to a time-out)

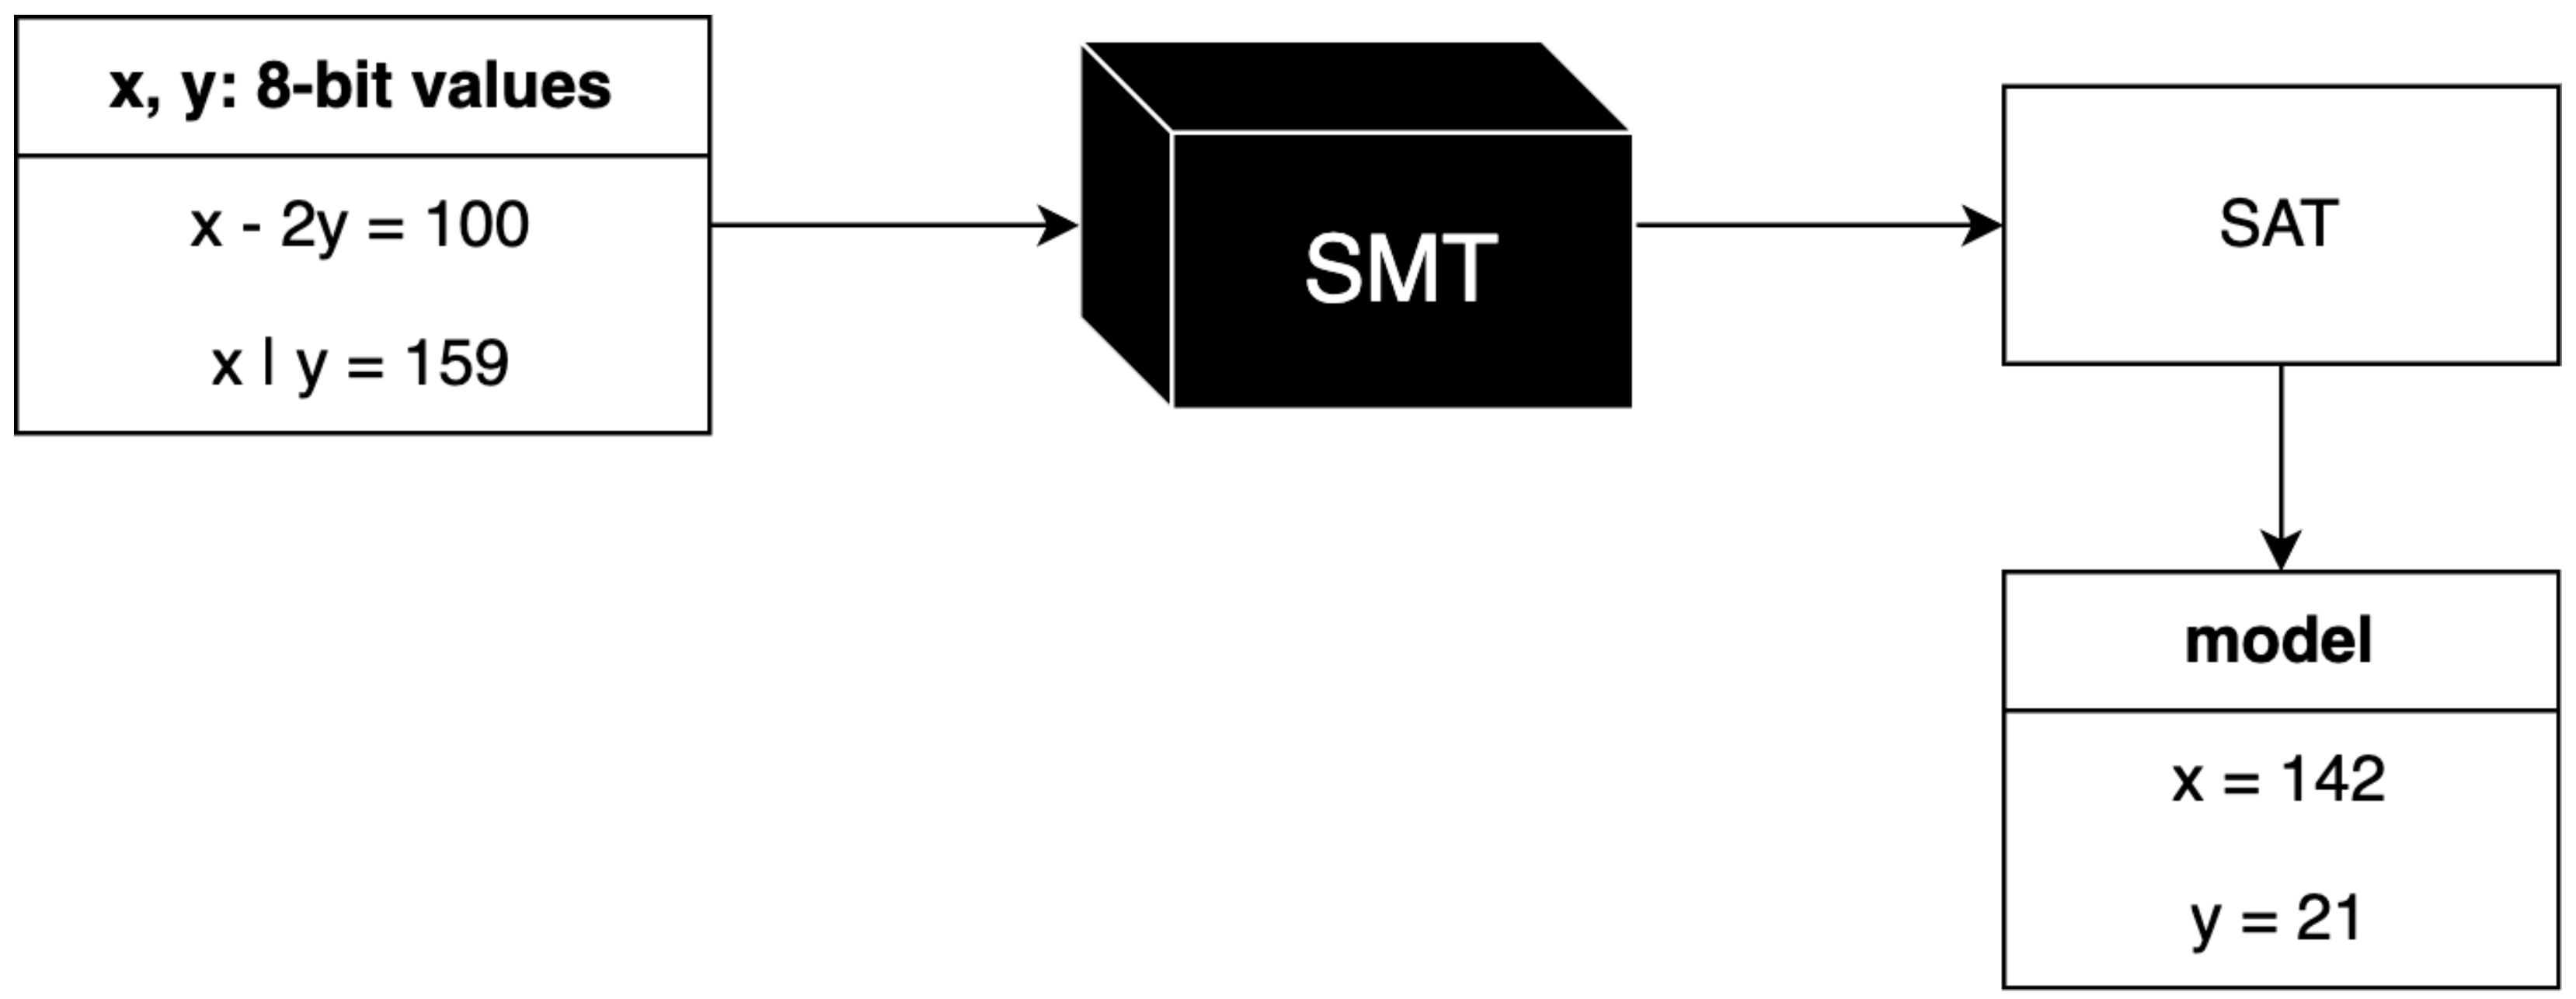
x, y: 8-bit values
x - 2y = 100
x | y = 159
SMT
SAT
model
x = 142
y = 21

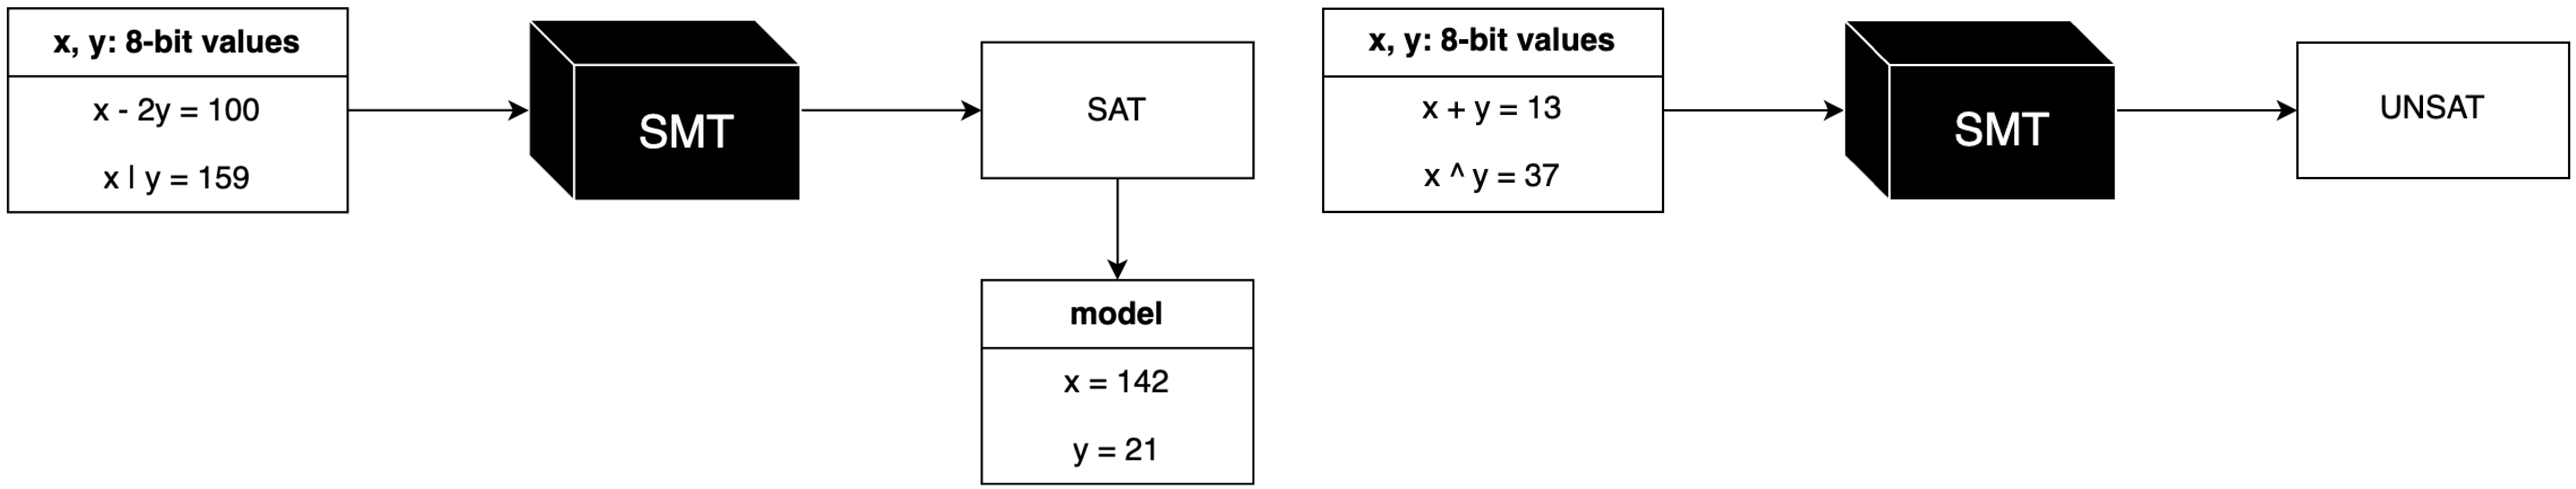
x, y: 8-bit values
x - 2y = 100
x | y = 159
SMT
SAT
model
x = 142
y = 21
x, y: 8-bit values
x + y = 13
x ^ y = 37
SMT
UNSAT

Program analysis with an SMT solver

- Check semantic equivalence
- Simplification engine
- Solve complex constraints
- Input crafting
- Model counting

Limitations

- Resource exhaustion
- Since SAT is NP-complete, SMT problems are *at least* NP-complete
- Expression complexity
  - Due to underlying semantic complexity (e.g. any decent cryptosystem)
  - Due to deliberate obfuscation (e.g. complex algebraic transformations)

Part I

Mixed Boolean-Arithmetic (MBA) obfuscation

MBA expressions

Algebraic expressions composed of integer arithmetic operators $(+, -, \times)$ and bitwise operators $(\wedge, \vee, \oplus, \neg)$.

Notation reminder

Operation	Math	Code
AND	$\wedge$	&
OR	$\vee$	|
XOR	$\oplus$	^
NOT	$\neg$	~

Note: I will use interchangeably the terms *boolean*, *bitwise* and *logic* operators.

Linear MBA expressions

$$(x \oplus y) + 2 \times (x \wedge y)$$

Polynomial MBA expressions

$$43(x \wedge y \vee z)^2((x \oplus y) \wedge z \vee t) + 2x + 123(x \vee y)zt^2$$

Obfuscate expressions

Given an MBA expression E_1, generate an expression E_2 that is:

- Semantically equivalent to E_1
- Syntactically more complex than E_1

Obfuscate expressions

Given an MBA expression E_1, generate an expression E_2 that is:

- Semantically equivalent to E_1
- Syntactically more complex than E_1

For that, we have ***rewrite rules*** and ***insertion of identities***.

Rewrite rules

Replace an expression with an equivalent (more complex) one.

$$x + y \to (x \oplus y) + 2 \times (x \wedge y)$$

Rewrite rules

Replace an expression with an equivalent (more complex) one.

$$x + y \rightarrow (x \oplus y) + 2 \times (x \wedge y)$$

Note: They can be applied iteratively (due to composability of polynomial MBA expressions).

$$x + y \to (x \oplus y) + 2(x \wedge y)$$

$$\circlearrowright$$

$$x' + y'$$

$$x' = (x \oplus y)$$

$$y' = 2(x \wedge y)$$

$$x + y \to (x \oplus y) + 2(x \wedge y)$$

$$\circlearrowright$$

$$x' + y'$$

$$\begin{aligned} x' &= (x \oplus y) \\ y' &= 2(x \wedge y) \end{aligned}$$

$$x' + y' \to (x' \oplus y') + 2(x' \wedge y') \equiv ((x \oplus y) \oplus 2(x \wedge y)) + 2((x \oplus y) \wedge 2(x \wedge y))$$

$$\circlearrowright$$

$$x' + y'$$

$$\begin{aligned} x' &= ((x \oplus y) \oplus 2(x \wedge y)) \\ y' &= 2((x \oplus y) \wedge 2(x \wedge y)) \end{aligned}$$

Insertion of identities

Wrap an expression with a pair of invertible mappings.

$$e = (x \oplus y) + 2 \times (x \wedge y) \qquad f : x \mapsto 39x + 23 \qquad f^{-1} : x \mapsto 151x + 111$$

$$f^{-1}(f(e)) = 151 \times (39 \times ((x \oplus y) + 2 \times (x \wedge y)) + 23) + 111$$

Insertion of identities

Wrap an expression with a pair of invertible mappings.

$$e = (x \oplus y) + 2 \times (x \wedge y) \qquad f : x \mapsto 39x + 23 \qquad f^{-1} : x \mapsto 151x + 111$$

$$f^{-1}(f(e)) = 151 \times (39 \times ((x \oplus y) + 2 \times (x \wedge y)) + 23) + 111$$

Note: In general, affine functions (or permutation polynomials).

Obfuscate constants

Replace a constant by a computational process (expression) on a given number of variables that will always evaluate to the target constant at runtime.

Opaque constants

- K constant
- P, Q inverse permutation polynomials
- E non-trivially equal to zero MBA expression

Conceal constant: $K \equiv P(E + Q(K))$

Opaque constants

- K constant
- P, Q inverse permutation polynomials
- E non-trivially equal to zero MBA expression

Conceal constant: $K \equiv P(E + Q(K))$

Proof:

$$P(E + Q(K)) = P(0 + Q(K)) = P(Q(K)) = K$$

$$K = 123$$
$$P(X) = 97X + 248X^2$$
$$Q(X) = 161X + 136X^2$$
$$E(x, y) = x - y + 2(\neg x \wedge y) - (x \oplus y)$$

$$P(E + Q(K)) = 195 + 97x + 159y + 194\neg(x \vee \neg y) + 159(x \oplus y)$$
$$+ (163 + x + 255y + 2\neg(x \vee \neg y) + 255(x \oplus y)) \times (232 + 248x + 8y + 240\neg(x \vee \neg y)$$
$$+ 8(x \oplus y))$$

Fact

State-of-the-art software protection mechanisms leverage MBA transformations to obfuscate code.

Why?

Combinations of operators from these different fields *do not interact well together*

- No general rules (distributivity, factorization...) or theory
- Computer algebra systems do not support bitwise operators with symbolic variables

SMT solvers support for mixing operators (*bit vector* theory)

- Reasonably good at proving semantic equivalence
    - It can be easily thwarted with deliberate MBA transformations as well
- Pretty bad at simplification for general MBA expressions

Part II

Analysis - Symbolic execution

Calculator

Concrete calculations

$$\begin{vmatrix} 1 & 2 \\ 3 & 4 \end{vmatrix} = 4 - 2 \cdot 3 = -2$$

Calculator

Concrete calculations

$$\begin{vmatrix} 1 & 2 \\ 3 & 4 \end{vmatrix} = 4 - 2 \cdot 3 = -2$$

Computer Algebra System (CAS)

Symbolic calculations and expression manipulation

$$\begin{vmatrix} 1 & 2 \\ a & 4 \end{vmatrix} = 4 - 2a = 2(2 - a)$$

What is symbolic execution?

What is symbolic execution?

Roughly speaking, just a **computer algebra system** for:

- Programming languages: C, C++, Java, Rust...
- Assembly languages: x86, x86-64, ARM64, MIPS, RISC-V...
- Intermediate languages: LLVM-IR, SMT-LIB, r2 ESIL, IDA Microcode, $YOUR_OWN...

More specifically, symbolic execution is a **program analysis technique**:

- Represent inputs as *symbolic* variables instead of *concrete* values (normal execution or emulation)
- Derive constraints that encode control-flow and data-flow with respect to these symbolic variables

Use these constraints to reason about and extract information from the program.

But how does it *actually* work?

But how does it *actually* work?

1. Define two data structures:
    - **state_map**: symbolic mapping for the variables (registers, memory locations)
    - **path_constraint**: conditions required to reach current instruction
2. Extract the semantics of each statement (instruction)
3. Update these two data structures to account for the effects of the *executed* statement (instruction)
4. If there is control-flow branching, *fork* these structures to keep track of different execution paths

The **state_map** represents *data-flow* updates, i.e. the (computational) process through which a variable ends up holding a certain value at a given point in the program execution.

The **state_map** represents *data-flow* updates, i.e. the (computational) process through which a variable ends up holding a certain value at a given point in the program execution.

The **path_constraint** represents *control-flow* tracking, i.e. the set of constraints (conditions) on the variables that need to be satisfied for the execution to reach a given point in the program.

Visual example

```
_start:
    mov rax, 123  <=0=
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> rax
                 rbx -> rbx
                 rdi -> rdi
                 rsi -> rsi
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi  <=0=
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
```

```
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> 123
                 rbx -> rbx
                 rdi -> rdi
                 rsi -> rsi
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi   <=0=
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
```

```
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint   true
state_map         rax -> (123 + rsi)
                  rbx -> rbx
                  rdi -> rdi
                  rsi -> rsi
                  zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2      <=0=
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
```

```
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> ((123 + rsi) ^ rdi)
                 rbx -> rbx
                 rdi -> rdi
                 rsi -> rsi
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx   <=0=
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> ((123 + rsi) ^ rdi)
                 rbx -> 2
                 rdi -> rdi
                 rsi -> rsi
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3     <=0=
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((123 + rsi) ^ rdi) + 2)
                 rbx -> 2
                 rdi -> rdi
                 rsi -> rsi
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax  <=0=
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((123 + rsi) ^ rdi) + 2)
                 rbx -> 2
                 rdi -> 3
                 rsi -> rsi
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx   <=0=
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((123 + rsi) ^ rdi) + 2)
                 rbx -> 2
                 rdi -> 3
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi  <=0=
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> ((((123 + rsi) ^ rdi) + 2) + 2)
                 rbx -> 2
                 rdi -> 3
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7     <=0=
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((((123 + rsi) ^ rdi) + 2) + 2) ^ 3)
                 rbx -> 2
                 rdi -> 3
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx  <=0=
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((((123 + rsi) ^ rdi) + 2) + 2) ^ 3)
                 rbx -> 7
                 rdi -> 3
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336 <=0=
    add rax, rdi
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> ((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7)
                 rbx -> 7
                 rdi -> 3
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi  <=0=
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> ((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7)
                 rbx -> 7
                 rdi -> 1336
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337 <=0=
    jnz bad

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336)
                 rbx -> 7
                 rdi -> 1336
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> zf
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
    cmp rax, 1337
    jnz bad          <=0=

good:
    xor rdi, rdi
    jmp exit

bad:
    mov rdi, 1

exit:
    mov rax, 60
    syscall
```

```
path_constraint  true
state_map        rax -> (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336)
                 rbx -> 7
                 rdi -> 1336
                 rsi -> (((123 + rsi) ^ rdi) + 2)
                 zf  -> (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336)
                        == 1337 ? 1 : 0
```

```
_start:
    mov rax, 123
    add rax, rsi
    xor rax, rdi
    mov rbx, 2
    add rax, rbx
    mov rdi, 3
    mov rsi, rax
    add rax, rbx
    xor rax, rdi
    mov rbx, 7
    and rax, rbx
    mov rdi, 1336
    add rax, rdi
```

```
    cmp rax, 1337
    jnz bad

good:
    xor rdi, rdi  <=1=
    jmp exit

bad:
    mov rdi, 1    <=2=

exit:
    mov rax, 60
    syscall
```

```
path_constraint  (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) == 1337
state_map        ...
                 zf  -> 1

path_constraint  (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) != 1337
state_map        ...
                 zf  -> 0
```

How do we *reason* about this information?

How do we *reason* about this information?

With an SMT solver

How do we *reason* about this information?

With an SMT solver

Mostly

Data-flow analysis

1. The symbolic execution engine is used to extract the formula of the return value of a function with respect to its inputs parameters: check its value in the `state_map`

1. The symbolic execution engine is used to extract the formula of the return value of a function with respect to its inputs parameters: check its value in the `state_map`

2. The formula is fed into the SMT solver

1. The symbolic execution engine is used to extract the formula of the return value of a function with respect to its inputs parameters: check its value in the `state_map`

2. The formula is fed into the SMT solver

3. The SMT can:
    - Attempt to simplify the formula to get a nicer representation
    - Craft inputs value that will make the formula evaluate to a desired output (i.e. inputs that will make the function return a desired value)

Compiler optimization techniques

Embedded into the `state_map` population process:

Compiler optimization techniques

Embedded into the `state_map` population process:

- Constant propagation: by construction
- Constant folding: evaluate intermediate expressions on constant values
- Reaching definitions: calculate at a given point the set of definitions that reach it
- Liveness analysis: calculate at a given point the *live* variables (may be read before updated)

Control-flow analysis

Control-flow analysis

1. The symbolic execution engine is used to extract the formulae (constraints) for a given path branching to happen: check its `path_constraint`

Control-flow analysis

1. The symbolic execution engine is used to extract the formulae (constraints) for a given path branching to happen: check its `path_constraint`

2. The constraints are fed into the SMT solver

Control-flow analysis

1. The symbolic execution engine is used to extract the formulae (constraints) for a given path branching to happen: check its `path_constraint`

2. The constraints are fed into the SMT solver

3. The SMT solver can prove the feasibility of the constraints, meaning the path is reachable
    - If it is, retrieve a model for it, i.e. input values that will make the program execution to reach it
    - If it is not, we have detected an obfuscating opaque predicate and can ignore/patch it away

Example

```
path_constraint  (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) == 1337
```

Example

```
path_constraint  (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) == 1337
```

Given 64-bit variables `rdi` and `rsi`:

- Is there any variable assignment (for `rdi` and `rsi`) that makes the `path_constraint` satisfiable?

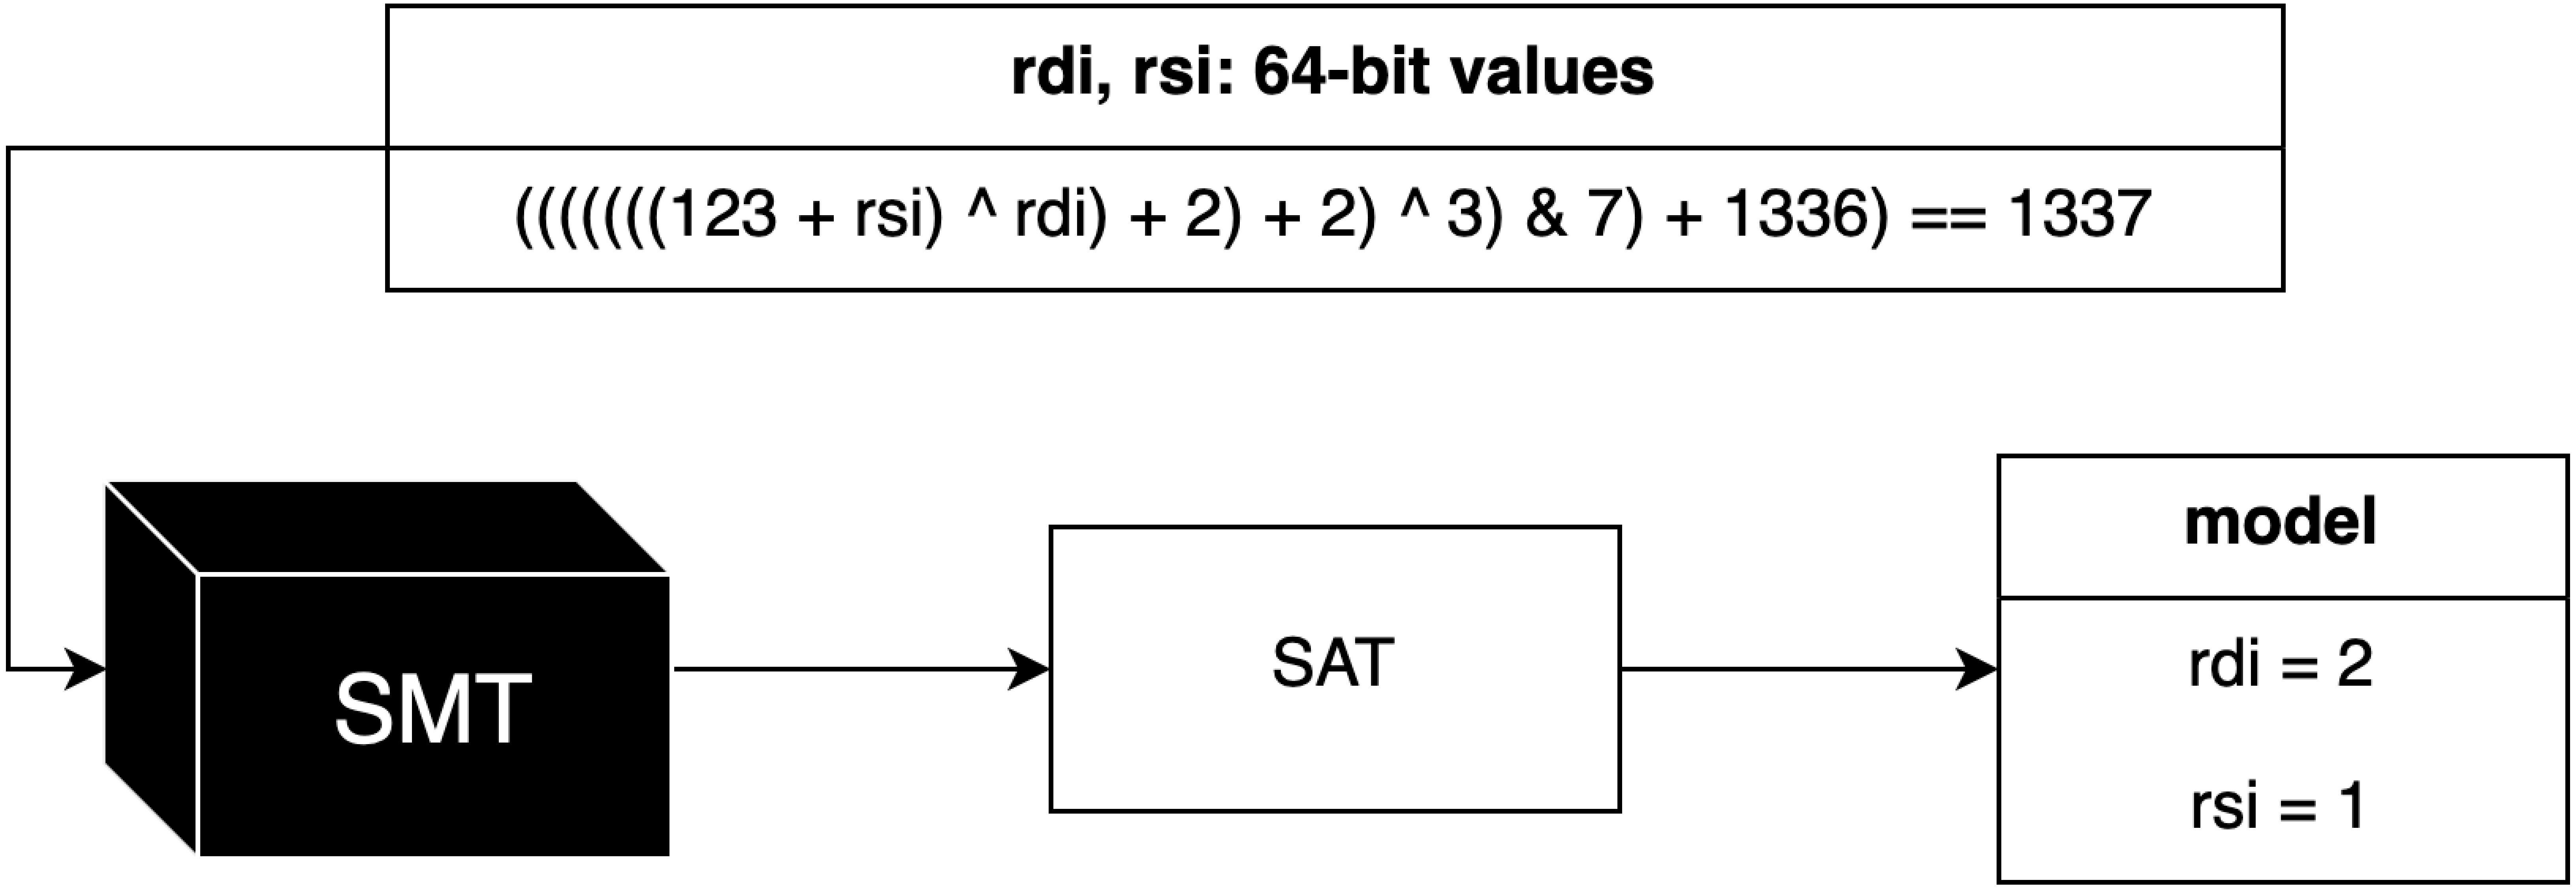
rdi, rsi: 64-bit values
(((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) == 1337
SMT
SAT
model
rdi = 2
rsi = 1

```python
import z3

rdi, rsi = z3.BitVecs('rdi rsi', 64)
path_constraint = (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) == 1337

solver = z3.Solver()
solver.add(path_constraint)

if solver.check() == z3.sat:
    print(solver.model())
```

```python
import z3

rdi, rsi = z3.BitVecs('rdi rsi', 64)
path_constraint = (((((((123 + rsi) ^ rdi) + 2) + 2) ^ 3) & 7) + 1336) == 1337

solver = z3.Solver()
solver.add(path_constraint)

if solver.check() == z3.sat:
    print(solver.model())
```

```
[rdi = 2, rsi = 1]
```

Tooling

Tooling

Welcome to the jungle

Implementation technology

- **Interpreter based**: Miasm, Triton, Angr, Maat, radius2
- **Instrumentation based**: QSYM
- **Compiler based**: KLEE, SymCC, SymQEMU

Implementation technology

- **Interpreter based**: Miasm, Triton, Angr, Maat, radius2
- **Instrumentation based**: QSYM
- **Compiler based**: KLEE, SymCC, SymQEMU

Target

- **Binary**: Miasm, Triton, Angr, Maat, radius2, QSYM, SymQEMU
- **Source code**: KLEE, SymCC

Implementation technology

- **Interpreter based**: Miasm, Triton, Angr, Maat, radius2
- **Instrumentation based**: QSYM
- **Compiler based**: KLEE, SymCC, SymQEMU

Target

- **Binary**: Miasm, Triton, Angr, Maat, radius2, QSYM, SymQEMU
- **Source code**: KLEE, SymCC

Focus

- **Analysis**: Miasm, Triton, Maat
- **Automagic**: Angr, radius2
- **Test generation**: QSYM, KLEE, SymCC, SymQEMU

Limitations

And some ideas to overcome them

- Path explosion: the number of control-flow paths grows exponentially ($\rightarrow\ \infty$ for unbounded loops)
    - Manual location of interesting code
    - Concolic (**con**crete + symb**olic**) execution

- Path explosion: the number of control-flow paths grows exponentially ($\rightarrow\ \infty$ for unbounded loops)
    - Manual location of interesting code
    - Concolic (**con**crete + symb**olic**) execution

- Support for syscalls, standard C library functions, etc.:
    - Same as with any emulator: *hook 'em all*

- Path explosion: the number of control-flow paths grows exponentially ($\rightarrow \infty$ for unbounded loops)
    - Manual location of interesting code
    - Concolic (**con**crete + symb**olic**) execution

- Support for syscalls, standard C library functions, etc.:
    - Same as with any emulator: *hook 'em all*

- Limits of SMT solvers (expression complexity):
    - Program synthesis
    - Math™
    - Imagination

Part III

Analysis - Program synthesis

Motivating example

Motivating example

Consider the following obfuscated expression:

$$f(x, y, z) = (((x \oplus y) + ((x \wedge y) \times 2)) \vee z) + (((x \oplus y) + ((x \wedge y) \times 2)) \wedge z)$$

Motivating example

Consider the following obfuscated expression:

$$f(x, y, z) = (((x \oplus y) + ((x \wedge y) \times 2)) \vee z) + (((x \oplus y) + ((x \wedge y) \times 2)) \wedge z)$$

Treat f as a *black-box* and observe its behavior:

$$\begin{array}{rcccl} (1, 1, 1) & \longrightarrow & \boxed{f(x, y, z)} & \longrightarrow & 3 \\ (2, 3, 1) & \longrightarrow & \boxed{f(x, y, z)} & \longrightarrow & 6 \\ (0, -7, 2) & \longrightarrow & \boxed{f(x, y, z)} & \longrightarrow & -5 \\ & & \dots & & \end{array}$$

Motivating example

Consider the following obfuscated expression:

$$f(x, y, z) = (((x \oplus y) + ((x \wedge y) \times 2)) \vee z) + (((x \oplus y) + ((x \wedge y) \times 2)) \wedge z)$$

Treat f as a *black-box* and observe its behavior:

$$(1, 1, 1) \longrightarrow \boxed{f(x, y, z)} \longrightarrow 3$$

$$(2, 3, 1) \longrightarrow \boxed{f(x, y, z)} \longrightarrow 6$$

$$(0, -7, 2) \longrightarrow \boxed{f(x, y, z)} \longrightarrow -5$$

$$\dots$$

We want to *synthesize* a simpler function with the same I/O behavior:

$$h(x, y, z) = x + y + z$$

What is program synthesis?

What is program synthesis?

The process of automatically constructing *programs* (code, expressions, etc.) that satisfy a given specification.

Specification

Describe the expected behavior of the resulting synthesized candidate.

The implementation details are carried out by the synthesizer.

- Formal specification in some logic (e.g. first-order logic):

$$\forall x \in \mathbb{Z}/2^{64}\mathbb{Z}, P(x) = x + 7$$

- Formal specification in some logic (e.g. first-order logic):

$$\forall x \in \mathbb{Z}/2^{64}\mathbb{Z}, P(x) = x + 7$$

- A set of I/O pairs that describe the program behavior:

$$(0, 7), (-4, 3), (123, 130), (-368, -361), \ldots$$

- Formal specification in some logic (e.g. first-order logic):

$$\forall x \in \mathbb{Z}/2^{64}\mathbb{Z},\ P(x) = x + 7$$

- A set of I/O pairs that describe the program behavior:

$$(0, 7), (-4, 3), (123, 130), (-368, -361), \ldots$$

- A reference implementation (oracle) to generate I/O pairs

Synthesis approach

Enumerative program synthesis (oracle-guided)

- (Pre)generate an (offline) exhaustive list of potential candidates

- (Pre)generate an (offline) exhaustive list of potential candidates
- Generate a set of I/O pairs from the obfuscated code (oracle)

- (Pre)generate an (offline) exhaustive list of potential candidates
- Generate a set of I/O pairs from the obfuscated code (oracle)
- Select the candidates that match the oracle's I/O behavior

- (Pre)generate an (offline) exhaustive list of potential candidates
- Generate a set of I/O pairs from the obfuscated code (oracle)
- Select the candidates that match the oracle's I/O behavior
- If possible, verify semantic equivalence

No candidates?

- Extend the pool of candidates (warning: exponential growth)

No candidates?

- Extend the pool of candidates (warning: exponential growth)

Multiple candidates?

- Check for semantic equivalence between them
- Generate more I/O pairs

QSynth

Combines symbolic execution and enumerative program synthesis iteratively.

QSynth

Combines symbolic execution and enumerative program synthesis iteratively.

- Split an obfuscated expression into smaller subexpressions
- Synthesize the subexpressions individually
- Reconstruct the overall simplified expression

QSynth

Combines symbolic execution and enumerative program synthesis iteratively.

- Split an obfuscated expression into smaller subexpressions
- Synthesize the subexpressions individually
- Reconstruct the overall simplified expression

Paper: https://profs.scienze.univr.it/~ceccato/papers/2020/bar2020.pdf

Tooling

Public implementations of the QSynth algorithm.

Tooling

Public implementations of the QSynth algorithm.

msynth

Built on top of Miasm

Tooling

Public implementations of the QSynth algorithm.

msynth

Built on top of Miasm

qsynthesis

Built on top of Triton

Limitations

Limitations

- Semantic complexity (e.g. non-toy cryptography)

Limitations

- Semantic complexity (e.g. non-toy cryptography)
- Non-determinism ¯_(ツ)_/¯

Limitations

- Semantic complexity (e.g. non-toy cryptography)
- Non-determinism ¯_(ツ)_/¯
- Point functions: constant output except for a single distinguished (small finite set of) input(s)

EOF

Advanced Binary Analysis Techniques

- In-person @ Madrid
- September 26-27, 2024
- 185 EUR
- https://www.inscribirme.com/hackplayers-academy

Advanced Software Protection - Attacks and Defense

For Security Researchers and Developers

- Remote
- November 9-10 & 16-17, 2024
- 3600 EUR ("EUSKALHACK2024" code for a 10% off)
- https://reg-asp-fall24.furalabs.com