

Security

User Guide

PeopleXD Security

Table of Contents

Document Control	7
1. Overview	8
1.1. Purpose of the Guide.....	8
1.2. Menu Profiles v Data Access	8
2. Security Dashboard Overview	9
2.1. How to Access the Security Dashboard	9
2.2. Security Dashboard Overview	10
3. System Overview Tab	11
3.1. Current Status.....	11
3.1.1. Logged In.....	11
3.1.2. Locked Out.....	12
3.1.3. Logged Out.....	12
3.1.4. Yet to Log In	12
3.2. Lock System.....	13
3.2.1. What is the Lock System Button?	13
3.2.2. Exemptions	14
3.2.3. Lock System	15
3.2.4. Manually Unlock System.....	16
3.3. Product Access Restriction Options	17
3.3.1. What is this Widget?	17
3.3.2. Product Availability.....	17
3.3.3. IP Address Restrictions.....	17

Table of Contents

4. Password Policy.....	18
4.1. What are Account Profiles?	18
4.2. Account Profiles and Single Sign On	18
4.3. Where to Manage Account Profiles.....	18
4.4. Default XD Portal Account Profiles	19
4.5. View & Editing a Password Policy	19
4.5.1. Use for Portal/E-Recruitment Indicator	20
4.5.2. Account Detail.....	20
4.5.3. Password Usage	21
4.5.4. Password Rules.....	21
4.5.5. Blacklisted Passwords	22
5. Menu Profiles	23
5.1. What are Menu Profiles?	23
5.2. Where are Menu Profiles Configured?	24
5.3. Create New Menu Profile	24
5.3.1. Create the Profile.....	24
5.3.2. Create Account as a Duplicate.....	25
5.4. Edit a Menu Profile	25
5.4.1. Add Menu Options	25
5.4.2. Update Menu Profile Name	27
5.5. Delete Menu Profile	27
5.6. Download Menu Profile	27
5.7. Import Menu Options	28
5.8. Menu Profile Matrix	29

Table of Contents

5.8.1. Configuring the Menu Profile Matrix	29
5.9. Menu Option Parent Links	30
6. Managing User Accounts.....	31
6.1. 6.1 How to Access a User's Account	31
6.1.1. Search for a User	31
6.1.2. Search Filter	31
6.2. XD Portal User Accounts.....	32
6.2.1. View Portal Account.....	32
6.2.2. General Tab.....	33
6.2.3. Menu Profiles Tab.....	34
6.2.4. Create New XD Portal User	34
6.2.5. Set Authentication Type	35
6.2.6. Manually Reset Password	36
6.2.7. Assign Menu Profiles	36
6.3. XD Back Office User Accounts.....	37
6.3.1. Create New Back Office User	37
6.3.2. Configure Back Office User Account	37
7. System Data Access	39
7.1. Configuring Data Access by Product	39
8. Other Settings	41
8.1. System Setup Widget	41
8.2. Content Security Policy.....	41
8.3. Production Environment Warning	42
8.4. User Sessions.....	43

Table of Contents

8.4.1.	To Lock all User Accounts	44
8.4.2.	To Unlock all User Accounts	44
9.	XD Security Reporting.....	45
9.1.	Menu Profile Report	45
9.2.	Portal User Report (Standard Report).....	45
9.3.	Portal Migration Report.....	46
9.4.	Logon/Option History	46
9.5.	Database Profile	46
10.	Self-Registration.....	47
10.1.	What is Self-Registration	47
10.2.	Self-Registration Profiles	47
10.3.	Authentication Types.....	48
10.3.1.	In Application Password Process	48
10.3.2.	Single Sign On (SSO).....	48
10.3.3.	SAML.....	48
11.	FAQs	50
12.	Menu Options Required	52
12.1.	Moving from Back Office to XD Portal	52
12.2.	Security in Quick Jump.....	52
12.3.	Access to Manage Account Screen	52
12.4.	Menu Profiles	53
12.5.	Lockout System.....	53
12.6.	Password Policy/Account Profiles	53

Table of Contents

12.7.	'Product Access' & 'Current Status' Widgets	54
12.8.	Set Up Tab Options	54
12.9.	Content Security Policy	55
12.10.	User Sessions	55
12.11.	Web Services	55
12.12.	System Parameters	56
12.12.1.	Page Referral Security	56
12.12.2.	Product Access	56
12.13.	Dashboard Configuration	56

Document Control

Version	Date	Author	Details
1.0	18 th Aug 2022	Georga Edwards	Published to Customer Success Portal
1.1	10 th Jan 2023	Isabelle Grey	Section 6.3 XD Back Office User Accounts added
1.2	13 th Jan 2026	James Martin	Added section 5.9 Menu Option Parent Links

1. Overview

1.1. Purpose of the Guide

This document provides guidance on how Security in XD Portal can be used to:

- Manage XD Portal user accounts
- Create and manage Menu Profiles
- Define the Account Profiles used to apply an organisation's password policy to users (both portal and back-office users)
- Access screens to support product level data access on XD Portal
- Report on user access via XD Insight
- The use of Web Services
- Allowing users to Self-Register for XD Portal

1.2. Menu Profiles v Data Access

User access to XD Portal can be broadly split into 2 categories: Menu Profile access and Data Access. The table below outlines the difference between both.

Access Type	Description
Menu Profiles	Provides access to system functionality. Menu options are linked to system elements including Dashboards, Screens, Buttons, Menu options, Widgets. Typically aligned to a user's role in the organisation e.g. a profile for 'HR Administrators', another for 'Payroll Administrators' etc.
Data Access	Provides access to the actual data/records stored on the system. For People Management, this includes access to: Employees, Posts, Salaries. Different employees can have access to different sets of records on PeopleXD e.g. access to all records, access to only a subset of records.

Therefore, for example, users of the People Management dashboard will need to be granted access for both categories i.e. a user will need:


1. A Menu Profile e.g. COREPORTAL_HRADMIN, to see the People Management Dashboard and all functionality within that.
2. Data access to see employee records, search for posts and access salary information.

2. Security Dashboard Overview


2.1. How to Access the Security Dashboard

Follow the below steps to access the XD Security Dashboard:

1. Quick Jump to the Security dashboard.

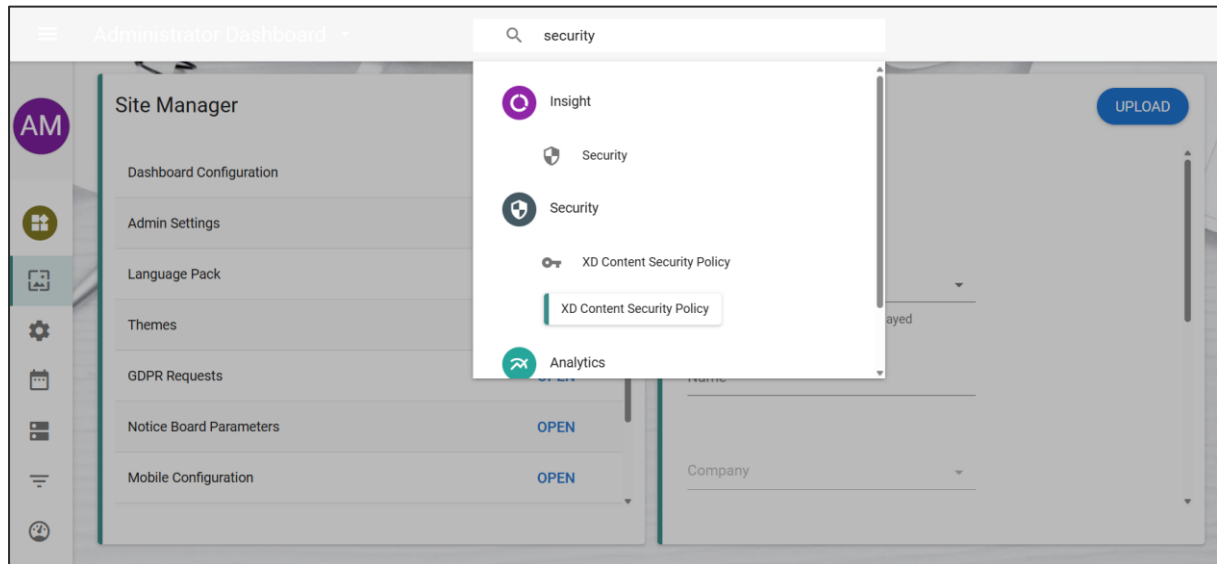

2. The Security dashboard opens on screen.

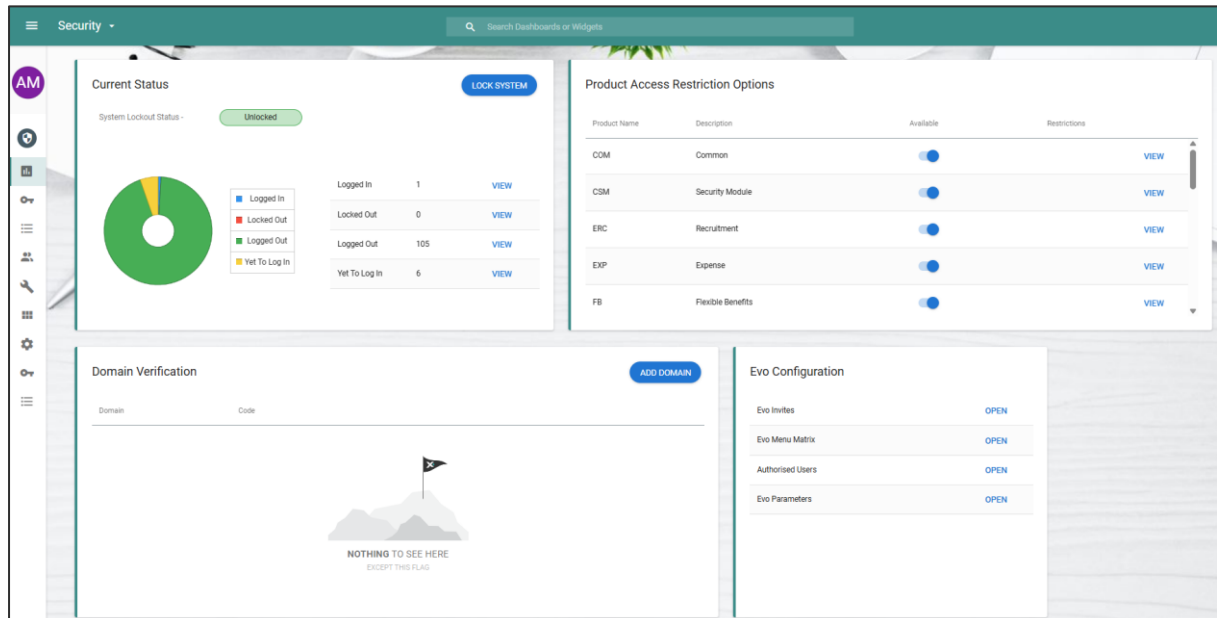

2.2. Security Dashboard Overview


 **Note:** The Security dashboard is not available to update in Dashboard Configuration. The Security dashboard is broken into 8 tabs. The following table outlines each one.

Tab	Description
System Overview	This is the landing page of the Security dashboard and provides key user account stats. The following widgets are available on this tab: Current Status, Product Access Restriction Options
Password Policy	This tab is used to manage the Account Profiles on People XD. Account Profiles are used to define the password policies to be applied to user accounts for XD Portal.
Menu Profiles	This tab is used to manage the Menu Profiles on People XD. A Menu Profile is a defined set of Menu Options so that these can be assigned to a user in bulk.
User Management	The System Users widget on this tab is used to manage user accounts on People XD including: Create accounts, Lock/unlock users, Activate/deactivate accounts, Reset passwords, Assign Menu Profiles etc. The Self Registration widget on this tab provides a view of employees that have been sent invitations to register and identifies if an account has been provisioned for them.
Set Up	This tab is used to: Access 'system users' screens for some products, to manage user data level access. Access some advanced Security features.
Web Service Apps	This tab is used to support the configuration of Web Services.
Self Registration	This tab is used to configure and manage the Self Registration process, including: Creating Self Registration Profiles to define all of the configurable settings for this process (Testing Procedures), Managing Terms of Service Documentation, Kicking off the Self Registration process.
Content Security Policy	The Content Security Policy widget is used to control how content hosted outside of the PeopleXD application can be viewed/embedded.

3. System Overview Tab

3.1. Current Status

The Current Status widget provides a snapshot of the status for all portal user accounts on XD Portal.

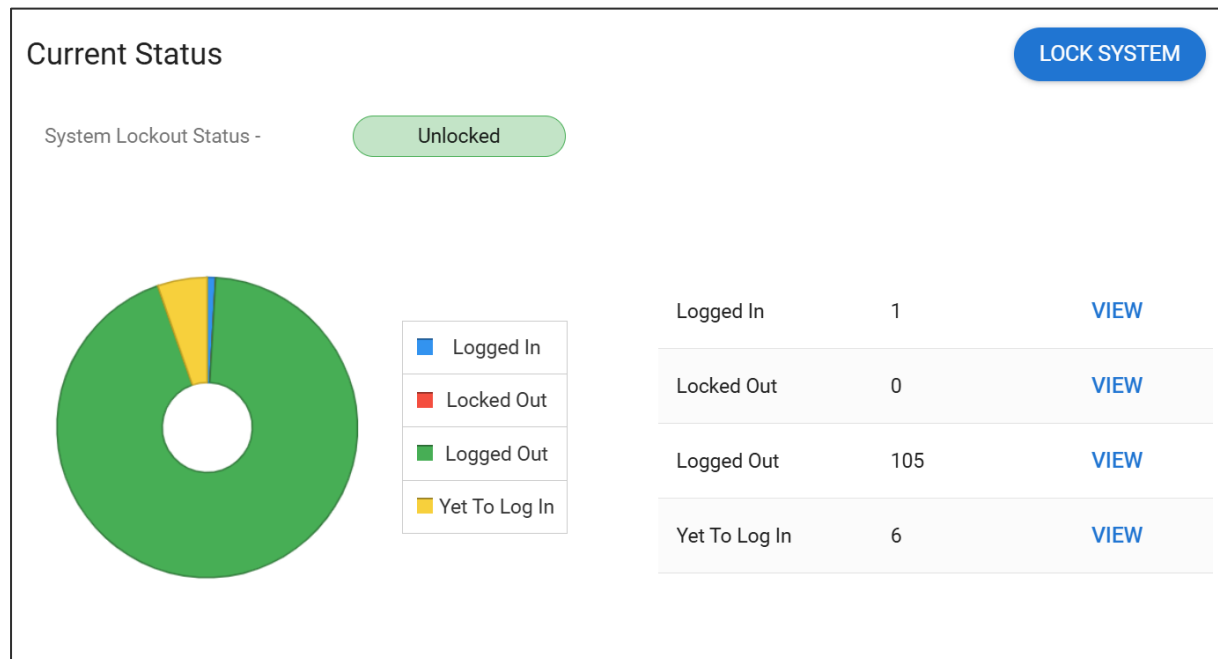

3.1.1. Logged In

This displays the number of users that are currently logged in to XD Portal.

1. Click on the **View** button to access a list of the corresponding usernames.
2. Click on the **Log Out** button to force a user to log out of the system.

Showing users that are Logged In

Security > Showing users that are Logged In

Search Users

Name	Portal Username	Employee Number	
 Arthur Morgan	ARTHUR.MORGAN	000280	LOG OUT
 Andrea Smith	PAYROLL_ADMIN	000260	LOG OUT

3.1.2. Locked Out

This displays the number of user accounts that are currently locked out of XD Portal.

A user will be locked out for one of the following reasons:

1. Incorrect username/password combination provided too many times.
2. Individual user's account has been locked by a system administrator.
3. All users have been locked out by the system administrator using the Lock System screen.

3.1.3. Logged Out

This displays the number of users that are currently logged out of XD Portal. No further actions are available for list of logged out users.

Showing users that are Logged Out		
Security > Showing users that are Logged Out		
Search Users		
Name	Portal Username	Employee Number
 Joe Bloggs	000003	000003
 John Ryan	000004	000004
 Ann Simpson	000005	000005
 Tom Jones	000006	000006
 Joseph Tyndall	000007	000007
 Jessica Stone	000008	000008
 Alice McLoughlin	000220	000220
		

3.1.4. Yet to Log In


This displays the number of portal users, where a user account has been created but they have not yet logged in to XD Portal. For these users, the Last Login on their account will display "No activity".

Showing users that are Yet To Log In		
Security > Showing users that are Yet To Log In		
Search Users		
Name	Portal Username	Employee Number
 Alice McLoughlin	000220	000220
 Ann Grant	CORECON	000063
 Deirdre Murphy	DEIRDRE.MUPRHY	000148
 Richard Phillips	RPHILLIPS	000118
 Stephen Fowler	SFOWLER	000099
 Grace Murphy	SUPERUSER	000083

3.2. Lock System

3.2.1. What is the Lock System Button?

The **Lock System** button on the Current Status widget provides the option to lock all users out of XD Portal.

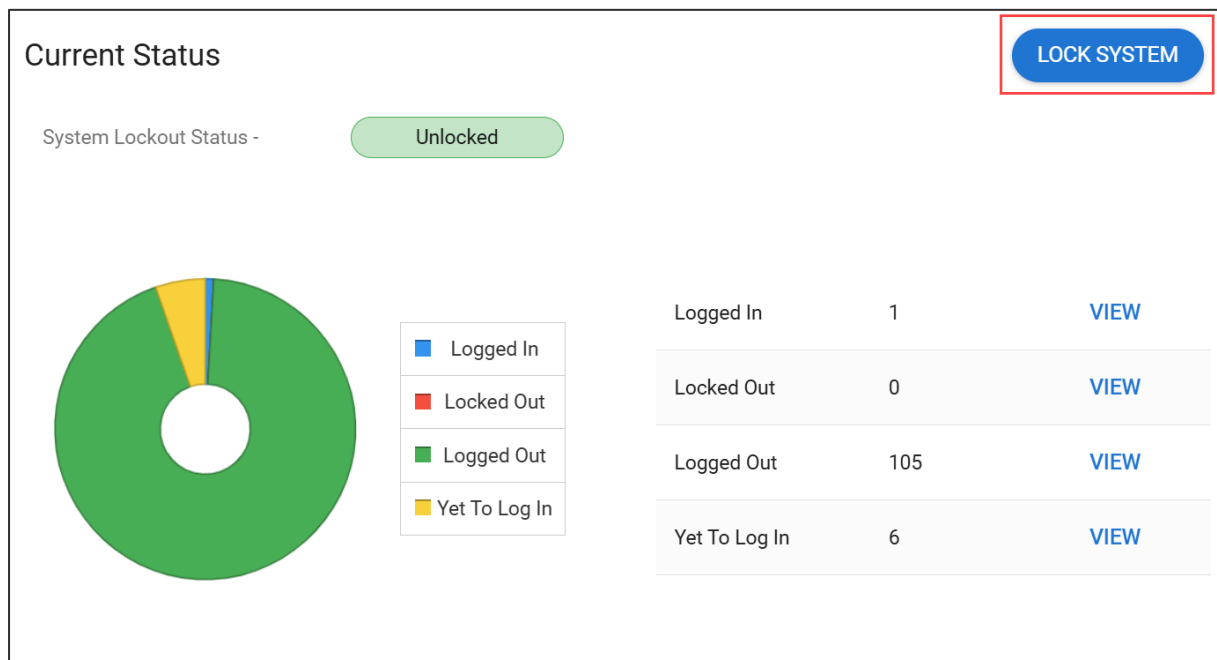

Click the **Lock System** button to open the Manage System Lockout screen. Here you can:

- Lock users out of the system
- Define a list of users who should be exempt from the system lockout i.e. who will be able to log in while the system is locked

Manage System Lockout

Security > Manage System Lockout

Lock Product

Exemptions 4

You are not an exemption

Automatically Unlock

Hours to Remain Locked

1

Lockout Message *

Enter a message to display to users during lockout

LOCK SYSTEM

3.2.2. Exemptions

A list of user accounts can be flagged as 'Exemptions'. These are the accounts that will not be locked out if the system has been locked i.e. these users will be able to login and use the application while it is locked.

The number on the **Exemptions** tab will identify the number of accounts that are currently exempt e.g. if this is set to 3, then 3 users are currently exempt from the lockout process.

To add a new exemption:

1. Select the **Exemptions** tab.

Manage System Lockout
Security > Manage System Lockout

Lock Product Exemptions ⁴

ADD EMPLOYEE

Person	
Carey Declan	REMOVE
Carr Amy	REMOVE
Jones Alice	REMOVE
Taylor Sarah	REMOVE

2. Click **Add Employee**.
3. Search for the user in the Person drop-down list and click **OK**.

Add Exemption

Person *
Adam Jones

CANCEL OK

The user will be listed on screen and the Exemptions tab is also updated to reflect the number of accounts that have been made exempt.

To remove a user from the list of exemptions:

1. Click on the **Exemptions** tab.
2. Click **Remove** next to the user's name.
3. The user will be removed from the list immediately.

3.2.3. Lock System

Locking the system will ensure that all users are unable to login (with the exception of users that are on the list of Exemptions).

To lock the system:

1. On the Current Status widget, click **Lock System**.

The Manage System Lockout screen opens. A message will appear to let the user know if they are or are not an exemption:

- "You are not an exemption" - The user will be locked out and unable to login to unlock the system.
 - "You are an exemption" - The user is exempt from the lockout process and will be able to login to XD Portal.
2. Define whether the system should be automatically or manually unlocked.

To automatically unlock the system:

1. Switch on the **Automatically Unlock** indicator.
2. Set the number of hours that the system should be locked for.
3. The system will automatically unlock after the defined number of hours has elapsed.

To manually unlock the system:

1. Switch off the **Automatically Unlock** indicator.
2. The user will need to manually unlock the system for users to gain access.
3. Enter a **Lockout Message**. This will be displayed to users during the lockout.
4. Click **Lock System** button.
5. Once the system is locked, the Current Status widget will be updated as follows:
 - "Locked" message is displayed
 - If set to manually unlock, "Never Expires" will display
 - If set to automatically unlock, "Expires [DATE] @ [TIME]" will display
 - The button is now updated to **Unlock System**

During a lockout, users will be able to access the login screen. However, when attempting to login, they will see the 'Lockout Message'. All users on the exemption list will be able to login without issue.

3.2.4. Manually Unlock System

To manually unlock the system:

1. On the Current Status widget, ensure that the "Locked" message is displayed.
2. Click the **Unlock** button.

The system will automatically unlock. All users will now be able to login as expected.

If the system has the **Automatically Unlock** indicator switched on, the user can still override this and manually unlock by completing the same steps outlined above.

3.3. Product Access Restriction Options

3.3.1. What is this Widget?

This widget is used to restrict access to products in PeopleXD. There are two options:

- **Global Availability:** Whether a product is available to any user of PeopleXD
- **IP Restrictions:** Restrict access for a product to nominated IP addresses/IP range

 **Note:** This widget should not be updated without first contacting PeopleXD.

Product Access Restriction Options			
Product Name	Description	Available	Restrictions
COM	Common	☒	VIEW
CSM	Security Module	☒	VIEW
ERC	Recruitment	☒	VIEW
EXP	Expense	☒	VIEW
FB	Flexible Benefits	☒	VIEW

3.3.2. Product Availability

Updating the **Available** indicator for a listed product will affect availability of that product for all users.

3.3.3. IP Address Restrictions

You can configure restrictions for each product, to allow for a list of IP addresses OR an IP range to be linked to that product. Only users with a specified IP address will be able to access the product. All other users will not have any access to that product.

To do this:

1. Click **View** for the product.
2. On the next screen click **Add**.
3. Provide the IP Address or IP Address Range.
4. Click **OK**.

4. Password Policy

4.1. What are Account Profiles?

Account Profiles are used to control password and general account settings for user accounts e.g.

1. Password requirements
2. Number of invalid login attempts before lockout, etc.

Organisations can create/update account profiles to reflect their own security policies and requirements. This enforces best practice security principles on end users of the PeopleXD system.

4.2. Account Profiles and Single Sign On



Note: Account Profiles are not applicable for portal accounts using Single Sign On/SAML authentication types.

4.3. Where to Manage Account Profiles

To access Account Profiles select the **Password Policy** tab.

The screenshot displays the 'Password Policy' management interface. At the top, there are two buttons: 'ADD PROFILE' and 'CONFIGURE SECURITY QUESTIONS'. Below these is a search bar labeled 'Search Profiles'. The main content area shows four profile cards, each with a title, a list of settings, and an 'ACTIONS' button.

Profile Name	Users	Lockout Threshold	Invalid Passwords	Minimum Characters	Maximum Characters
C##DEFAULT2	4	10	0	0	--
COREPORTAL	110	5	0	4	128
DBA Profile Account	7	--	1	6	--
DEFAULT	103	10	0	8	30

All profiles are displayed on the Password Policy widget.

4.4. Default XD Portal Account Profiles

A default account profile is provided for XD portal user accounts called "COREPORTAL". This is system mandatory and is used for all portal user accounts.

Note: It is not possible to create multiple account profiles for Portal. Only COREPORTAL may be used. This may be edited and updated as required to reflect the required password policy for the organisation. All portal users will be bound to that policy.

4.5. View & Editing a Password Policy

To view the rules defined on an account profile:

1. Search for the account profile.
2. Click the **Actions** button and select the **Policy Details** option.

The screenshot displays the 'Password Policy' management interface. At the top, there are buttons for 'ADD PROFILE' and 'CONFIGURE SECURITY QUESTIONS'. Below these is a search bar labeled 'Search Profiles'. The main area shows a list of four account profiles, each with its own policy details and an 'ACTIONS' button. The 'C##DEFAULT2' profile's 'ACTIONS' menu is expanded, showing options for 'Edit', 'Policy Details' (highlighted with a red box), and 'Delete'.

Profile Name	Users	Lockout Threshold	Invalid Passwords	Minimum Characters	Maximum Characters
C##DEFAULT2	4	10	0	0	–
COREPORTAL	110	5	0	4	128
DBA Profile Account	7	–	1	6	–
DEFAULT	103	10	0	8	30

The Update Policy Details for Account Profile screen opens.

Update policy details for C##DEFAULT2
Security > Update policy details for C##DEFAULT2

Use this policy on Portal/E-Recruitment
☐

Account Detail

Maximum failed attempts
10

Lockout duration (days)
1

Idle time (minutes)

Cookie life time (hours)
3

Sessions per user

Password Usage

Password life time (days)

Grace Time (days)
7

Time before reuse (days)

Changes before reuse

Password Rules

SAVE

4.5.1. Use for Portal/E-Recruitment Indicator

The **Use for Portal/E-Recruitment** indicator is used to identify the account profile to be used for Portal accounts i.e. COREPORTAL.

4.5.2. Account Detail

The following fields are available for Account Detail:

Item	Description
Account lockout threshold for invalid logon attempts	The number of invalid login attempts a user is permitted to make before their account will be locked out.
Lockout Duration (Days) *	<i>Back Office only.</i> The number of days that an account will remain locked out until it is automatically unlocked.
Time Before Reuse (Days)	The number of days before a user can reuse a password.
Cookie Life Time (Hours)	The cookie life time in hours.
Sessions Per User *	<i>Back Office only.</i> The number of concurrent open sessions a user can be logged into using their username.

4.5.3. Password Usage

The following fields are available for Password Usage:

Item	Description
Password life time (days)	The number of days before a user's password will expire and they will be required to create a new one.
Grace Time (Days) *	<i>Back Office only.</i> The number of days after a password has expired that a user can continue to use the old password.
Time before reuse (Days) *	<i>Back Office only.</i> The number of days before a user can reuse a password.
Changes before reuse *	<i>Back Office only.</i> The number of new passwords that a user must use before they can reuse an old password.


4.5.4. Password Rules

The following fields are available for Password Rules:

Item	Description
Minimum length	The minimum number of characters that must be used for the passwords.
Maximum length	The maximum number of characters that can be used for the password.
Allow username for password	Enabled: User can use their username as a password. Disabled: User cannot use their username as a password.
Prevent incrementing	Incrementing a password refers to incrementing a number on your password when changing e.g. password1 to password2. Enabled: Passwords can be incremented. Disabled: Passwords cannot be incremented.
Upper case characters	Minimum number of upper-case characters to be used.
Lower case characters	Minimum number of lower-case characters to be used.
Digits	Minimum number of digits to be used.
Special characters	Minimum number of special characters to be used.

4.5.5. Blacklisted Passwords

Click on this button to define a list of passwords that users will not be permitted to use.

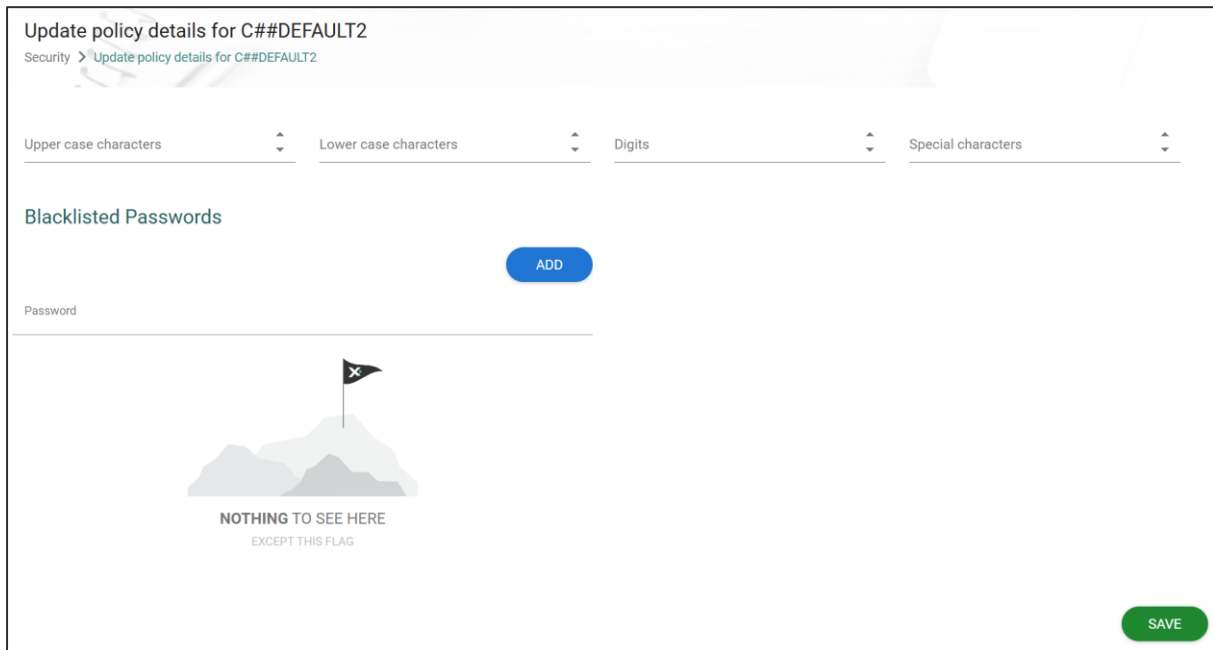

The screenshot shows a web interface for updating policy details for 'C##DEFAULT2'. At the top, there's a breadcrumb trail: 'Security > Update policy details for C##DEFAULT2'. Below this, there are four tabs: 'Upper case characters', 'Lower case characters', 'Digits', and 'Special characters'. The 'Blacklisted Passwords' section is active, featuring a blue 'ADD' button. Below the button is a text input field labeled 'Password'. The main area of the section is empty, displaying a placeholder graphic with a flag on a mountain and the text 'NOTHING TO SEE HERE EXCEPT THIS FLAG'. A green 'SAVE' button is located in the bottom right corner.

Any text included here cannot be used to form a password for a user e.g. if "password" is listed, a user cannot use "password", or "password123" or "mypassword" etc.



Note: Saving any changes will affect all users currently linked to the Account Profile i.e. Changes to COREPORTAL will affect all Portal users (if not SSO).

5. Menu Profiles

5.1. What are Menu Profiles?

Menu Profiles are used to control and restrict user's access to system functionality. Various elements of the system are controlled by Menu Options including:

- Dashboards
- Screens
- Buttons
- Menu options
- Widgets

A Menu Profile is a defined set of Menu Options that can be assigned to a user in bulk. These are typically aligned to a user's role in the organisation e.g. a profile for 'HR Administrators', another for 'Payroll Administrators', another for regular employees etc.


When the profile is assigned to the employee, they will get access to all the system functionality controlled by the corresponding Menu Options.

Employees will require at a minimum one Menu Profile to access the system. However, they may have many, depending on their role e.g.

- Employee Menu Profile to access the Employee Dashboard.
- Manager Menu Profile to access the Manager Dashboard (if they are a manager).
- HR Admin Menu Profile to access the People Management dashboard if they are an HR administrator.

5.2. Where are Menu Profiles Configured?

Menu Profiles are configured on the **Menu Profiles** tab.

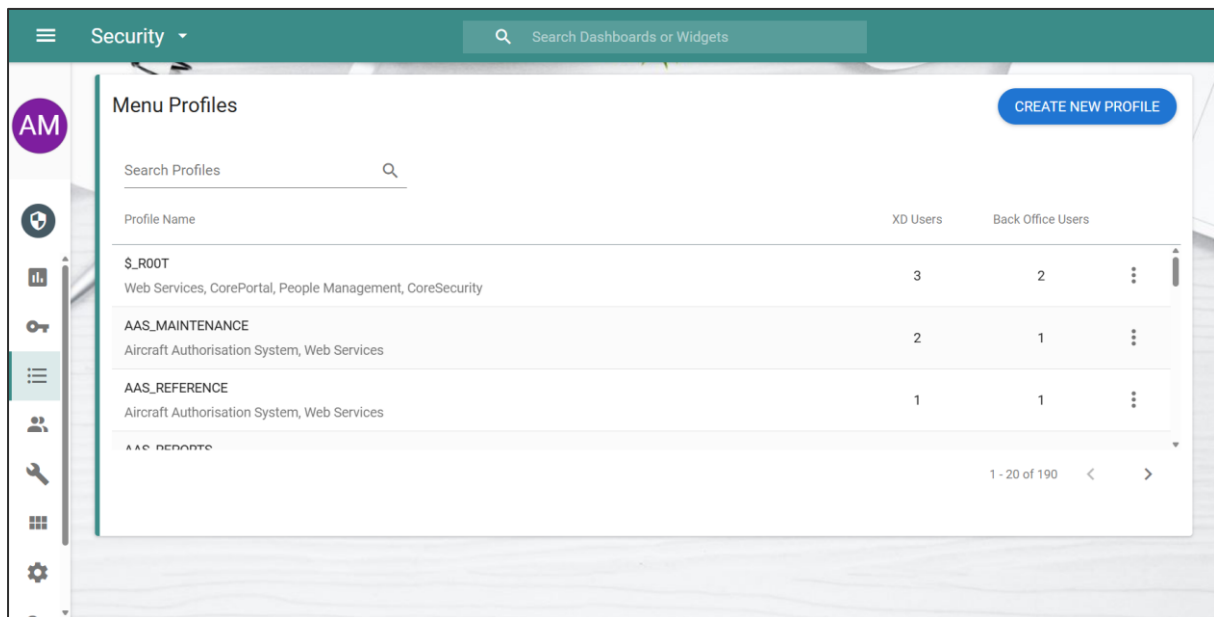

Profile Name	XD Users	Back Office Users
\$_ROOT Web Services, CorePortal, People Management, CoreSecurity	3	2
AAS_MAINTENANCE Aircraft Authorisation System, Web Services	2	1
AAS_REFERENCE Aircraft Authorisation System, Web Services	1	1

The Menu Profiles widget lists all existing Menu Profiles on the system. This includes any default Menu Profiles provided by PeopleXD and any additional Menu Profiles created by the organisation.

Use the search functionality at the top of the screen to search based on Menu Profile name only.


The **Users** columns identify how many Portal and Back Office users are currently assigned to that profile.

5.3. Create New Menu Profile

5.3.1. Create the Profile

To create a new Menu Profile:

1. Click the **Create New Profile** button.
2. Provide a name for the Menu Profile:
 - Code up to 30 characters (no spaces)
 - Description up to 50 characters

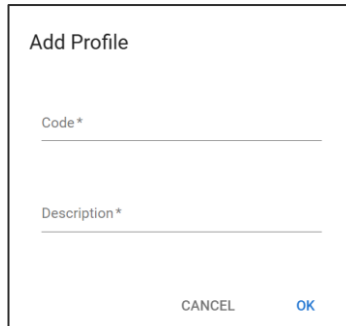A dialog box titled "Add Profile" with two input fields: "Code*" and "Description*". At the bottom right, there are two buttons: "CANCEL" and "OK".

Add Profile

Code*

Description*

CANCEL OK

3. Click **OK**.

The Menu Profile is created and is available on the Menu Profiles widget. At this stage you need to add the required Menu Options to the Menu Profile.

5.3.2. Create Account as a Duplicate

To do this, follow these steps:

1. Search for the menu profile to be copied.
2. Expand the 3 dot menu and select **Duplicate**.
3. The Duplicate Profile screen opens. This provides a default Code and Description. These are a copy of the same values as the original menu profile, suffixed with "COPY".
4. Update the Code and Description (if required).
5. Click **OK** to create the new Menu Profile.

5.4. Edit a Menu Profile


5.4.1. Add Menu Options

To add a Menu Option to a Menu Profile:

1. Search for the menu profile.
2. Expand the 3 dot menu and select **Manage Menu Options**.

Menu Options for AAS_MAINTENANCE			
Security > Menu Options for AAS_MAINTENANCE			
Search Menu Options Q All			
Menu Option	Menu ID	System	Active
Calendar	MAIN_MENU.WS_CALENDAR	Web Services	☒
Calendar		ffc48fb95fe354d72...	
Get clockings	WS_CALENDAR_MENU.GET_CLOCKINGS	Web Services	☒
Calendar > Get clockings		5488fa70b3200a6f...	
Get clockings Proxy (Entire Organization)	WS_CALENDAR_MENU.GET_CLOCKINGS_PROXY	Web Services	☒
Calendar > Get clockings Proxy (Entire Organization)		bc3d48eb5d7e29ba...	
Get settings	WS_CALENDAR_MENU.GET_SETTINGS	Web Services	☒
Calendar > Get settings		9d6ba6c1e028afc4...	
Get summary	WS_CALENDAR_MENU.GET_SUMMARY	Web Services	☒
Calendar > Get summary		4ea5840e93483f1c...	
Get upcoming	WS_CALENDAR_MENU.GET_UPCOMING	Web Services	☒
Calendar > Get upcoming		8b156626c778255...	
			1 - 50 of 2382 < >
			DISABLE ALL ENABLE ALL

- Use the search bar or filter icon to search for the required menu options.
 - Menu options are categorised by the system they impact.

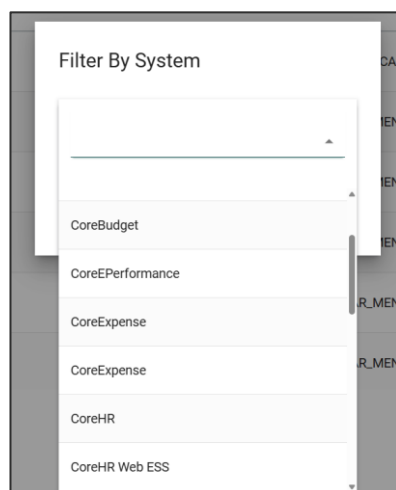

- Enable or Disable the menu options required for your profile.
 - Use the Enable All and Disable All buttons to toggle all available menu options.
 - Changes are saved automatically.



Note:

- Some menu options are linked to each other. If you select a Menu Option that has any sub-menu options, these are all automatically enabled.
- The configuration guides provided with each module/feature will provide detailed guidance on what Menu Options are used to control each element of the system.

5.4.2. Update Menu Profile Name

To update the name/description for a Menu Profile:

1. Search for the menu profile.
2. Expand the 3 dot menu and select **Edit Profile Description**.
3. Update the Description (up to 50 characters). Code cannot be updated.
4. Click the **OK** button.
5. The new Description will now be used for this Menu Profile.

5.5. Delete Menu Profile

To delete a menu profile:

1. Search for the Menu Profile.
2. Expand the 3 dot menu and select **Delete Profile and Remove Options**.
 - A message is displayed to alert the user that deleting the profile will remove access to any users that are assigned to this profile.
3. Click **Yes** to proceed.

 **Note:** This will have an immediate impact for any users that were assigned to that Menu Profile.

5.6. Download Menu Profile

Download menu profile allows users to download the menu profile to a file (which can then be uploaded into another environment).

To download a menu profile:

1. Search for the Menu Profile.
2. Expand the 3 dot menu and select **Download Menu Profile**.


5.7. Import Menu Options

This allows users to import menu options into the menu profile. When importing menu options, a user has two options:

1. Import menu options from an external file that has been downloaded from a different environment, such as UAT.
2. Import menu options from a different menu profile on the same environment.

To import a menu profile:

1. Search for the Menu Profile.
2. Expand the 3 dot menu and select **Import Menu Profile**.
3. Select your import option:
 - **From existing menu profile**
 - **From external file**

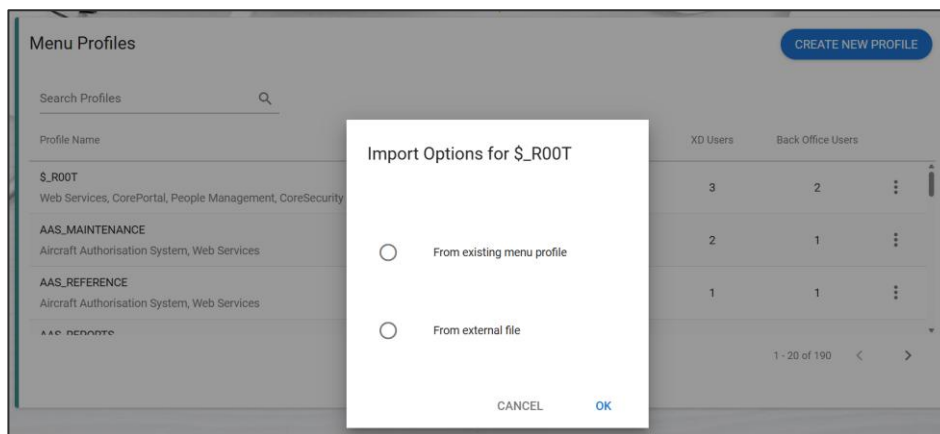

4. Follow the on-screen prompts to import your menu profile.
 - A message is displayed to alert the user that you are about to import menu options from and to a profile.
5. Click **YES** to proceed.

Note: This will have an immediate impact for any users that were assigned to that Menu Profile.

5.8. Menu Profile Matrix

The Menu Profile Matrix feature provides a way to identify groups of employees and automatically assign Menu Profiles to them.

There are 2 types of assignments available:

Assignments	Descriptions
Employee Organisation Role	Menu Profiles are assigned to employees based on an Organisational Role that they are assigned to. A nightly process identifies any employees with an Organisational Role that is defined in the rule matrix. If the Org Role assignment is effective that day, the process will assign the menu profile. If the Org Role is no longer active, the process will unassign the role.
Employee Account Provisioning	Menu Profiles are assigned to employees as part of the self-registration process. If the employee's current substantive contract meets the requirements in one of these rules, they will be awarded the corresponding menu profile.


5.8.1. Configuring the Menu Profile Matrix

Go to the [PeopleXD Security: Menu Profile Matrix - User Guide](#) for full details.

5.9. Menu Option Parent Links

5.9.1 What are Menu Option Parent Links?

The Menu Option Parent Links feature simplifies the process of enabling related menu options when configuring Menu Profiles. When a parent menu option is enabled or disabled, the system automatically prompts the administrator with a grid showing all linked child menu options or webservices, giving them the option to enable these related items simultaneously.

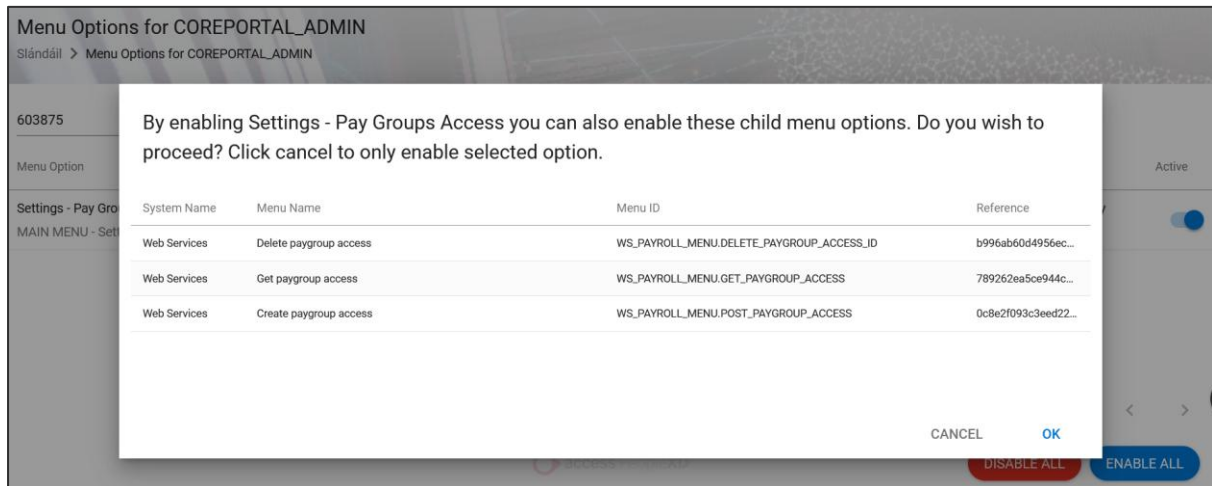

This is particularly useful when a feature or screen requires multiple menu options to function correctly. Rather than enabling each option individually, administrators can enable all related options with a single action, ensuring users have complete access to all functionality required for a feature.

Note: Please note the Parent Links feature is in early adopter programme and not in general release. Speak to your customer success manager for further details.


6. Managing User Accounts

6.1. 6.1 How to Access a User's Account

6.1.1. Search for a User

To search for a user and manage their account:

1. Select the **User Management** tab.

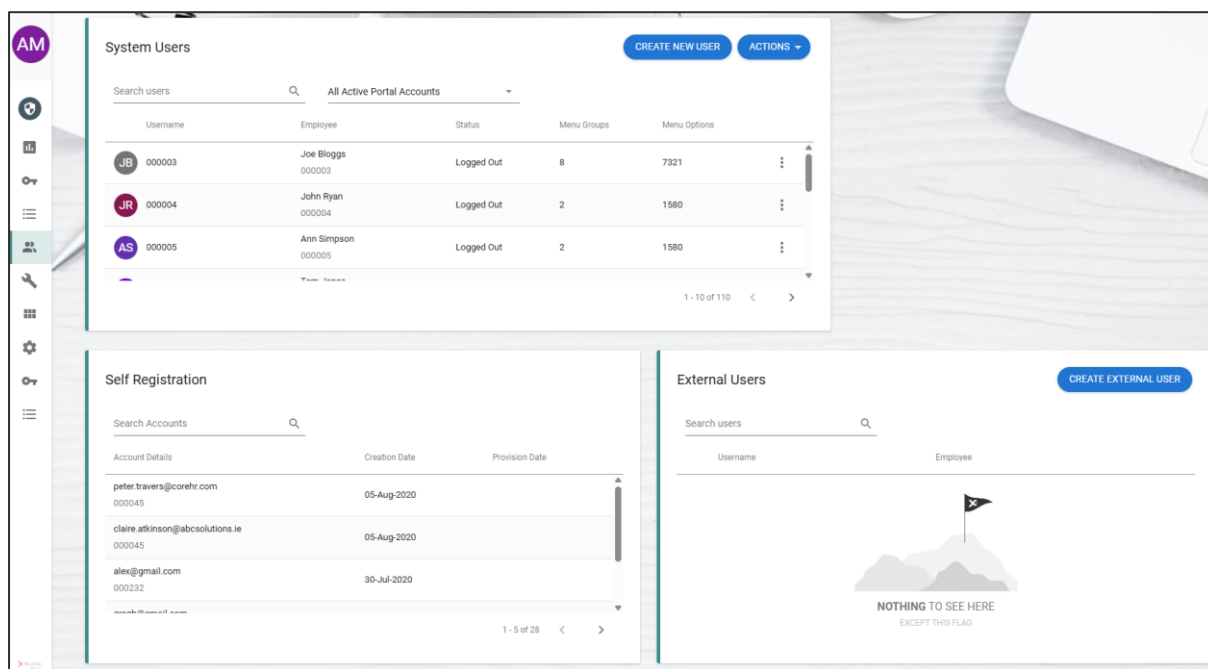

The System Users widget will list all the user accounts on PeopleXD. This is defaulted to show "All Active Portal Accounts".

6.1.2. Search Filter

The drop-down list of options controls the list of usernames displayed on the System Users widget. This defaults to "All Active Portal Accounts" and can be updated as required to search for accounts based on other criteria.

Option	Description
All Active Portal Accounts	All Portal user accounts that are currently active.
All Portal Accounts	All Portal user accounts, including inactive accounts.

Logged In	Accounts where the user is currently logged in to Portal. This does not include back-office accounts.
Logged Out	Accounts where the user is not currently logged in to Portal. This does not include back-office accounts.
Locked Out	Accounts where the user is currently locked out of Portal. This does not include back-office accounts.
Two Factor Not Enabled	Accounts that do not have two factor authentication enabled.
Older Password Algorithm	Accounts using an older password algorithm.
DB Schema Linked Accounts	Accounts linked to the DB Schema.
All Back-Office Accounts	All PeopleXD Back Office accounts - active and dormant.

6.2. XD Portal User Accounts

6.2.1. View Portal Account

To view Portal Accounts:

1. Search for the username. Ensure that the correct filter is required, depending on the user you are searching for.
2. Expand the 3 dot menu and select **Manage Account**.
3. The Manage Portal Account screen opens.

Manage Portal Account

Security > Manage Portal Account

JB HR Person Link Joe Bloggs Username 000003 **Logged Out**

Two Factor **Disabled** Menu Groups 8 Password Changed 11/01/2025 Last Activity Login (2422d 8h 34m 26s)
 Authentication ESS - SHA1-HMAC Menu Options Access 7321 Password Expiration -307 Days From Today Last Activity Timestamp 28th May 2019 09:12:22

General

Menu Profiles

Account

Locked ☐ Active ☒

Security

Authentication Type
 Basic ESS Authentication

The following table outlines what items are shown on the header area of a User's Portal Account:

Item	Description
HR Person Link	The employee name that the user account is linked to.
Status	The user's current status. This will be Logged In, Logged Out or Locked.
Two Factor	If Two Factor Authentication is enabled/disabled.
Authentication	The Authentication Type e.g. ESS or LDAP
Menu Groups	How many menu profiles the user has access to and the combined number of menu options that the user has access to for those groups.
Password Changed & Password Expiration	How many days since the password was changed and when it is due to expire.
Last Activity	The last time the user logged in (what date, how many days ago and from what browser and operating system). 'No activity' will appear if they have never logged in.

6.2.2. General Tab

The following table outlines what items are shown on the General tab of a User's Portal Account:

Item	Description
Locked	A user's account can be manually locked by the system administrator. This will prevent the user from logging in to XD Portal. Enabled: Account is currently locked. Disabled: Account is not locked. The Locked indicator may also be updated via other system processes including: User attempts to login too many times using invalid details and is automatically locked out, All users are locked out via the Lock System feature.
Active	A user's account must be active in order to login to XD Portal. Deactivating an account will prevent the user from accessing the system. This is typically used for users that have left the organisation. Enabled: Account is currently active. Disabled: Account is dormant.
Authentication Type	Basic ESS Authentication: The user will be required to enter a unique username and password to login to PeopleXD. They are not using Single

Item	Description
	Sign On. LDAP - OID Authentication: The user will be using Single Sign On to login to PeopleXD.

6.2.3. Menu Profiles Tab

This is where Menu Profiles are assigned to user accounts. This is what controls the users access to functionality on XD Portal.

Item	Description
Search	Search for the Menu Profile name.
Filter	Filter on Menu Profiles that have been assigned to the user already or those who have not been assigned yet.
Results	List of Menu Profiles. This list will reflect all the Menu Profiles that are configured on PeopleXD. If the Active indicator is on, this means that the user has that Menu Profile and therefore can access all the features controlled by the Menu Options enabled on it.

6.2.4. Create New XD Portal User

To add a new XD Portal user account:

1. On the System Users widget, click **Create New User**.

System Users

CREATE NEW USER

ACTIONS

Search users

Q

All Active Portal Accounts

Username	Employee	Status	Menu Groups	Menu Options	
JB 000003	Joe Bloggs 000003	Logged Out	8	7321	
JR 000004	John Ryan 000004	Logged Out	2	1580	
AS 000005	Ann Simpson 000005	Logged Out	2	1580	
	Tom Jones				

1 - 10 of 110

2. Select **Portal** from the User Type drop-down menu.
3. Enter a Username.
 - o The system does a check to see if the Username is available.
4. Enter a Password.

- This should adhere to the password policy for the PORTAL account profile.
 - The system checks if this is valid password.
- 5. Enable the **Manage Account on creation** toggle to go straight to managing the users access to the system.
- 6. Click **OK** to create the user.
- 7. Select an employee from the drop-down list to link the Portal account to an existing employee record.
 - You can Cancel the HR Person Link, however the system will remind you that it is recommended to link the account to an employee record.
- 8. Click **OK**.

 **Note:** Ensure all accounts for employees in your organisation are linked to the relevant employee record. This is required to ensure that when they login, they can see the expected records in areas such as the Employee Dashboard, Manager Dashboard etc.

6.2.5. Set Authentication Type

The Authentication Type drop-down list contains options that are used to identify how a user's account will be authenticated when they login to PeopleXD.

1. **Basic ESS Authentication:** Account username and password are held on PeopleXD database and are subject to the COREPORTAL Account Profile.
2. **LDAP - OID Authentication:** Account username and password are not held on PeopleXD and are managed via LDAP (e.g. Microsoft Active Directory).

For users that are created via Self-Registration, this will be automatically set for their account, based on the Self-Registration profile being used.

For users that are set up manually on PeopleXD, this must be updated directly on the Manage Portal Account Settings screen for the user. Select the required option. Changes will be saved immediately.

6.2.6. Manually Reset Password

To manually reset a user's password:

1. Go to the Manage Portal Account screen for the user.
2. Click the **Reset Password** button at the top right of the screen.
3. In New Password enter the new password that you will provide to the user.
 - This must adhere to the password policy as defined on the COREPORTAL Account Profile.
4. Click **OK** to complete.

The user can now login using the password that has been supplied in the above process.


However, they will be required to change this when they successfully login.

6.2.7. Assign Menu Profiles

For the user to be able to access the PeopleXD screens and features they require, they must be assigned to one or many Menu Profiles.

To assign/revoke a Menu Profile for a user:

1. Go to the Manage Portal Settings screen for the user and select the **Menu Security** tab.
 - All Menu Profiles that have been configured on PeopleXD will be listed here.

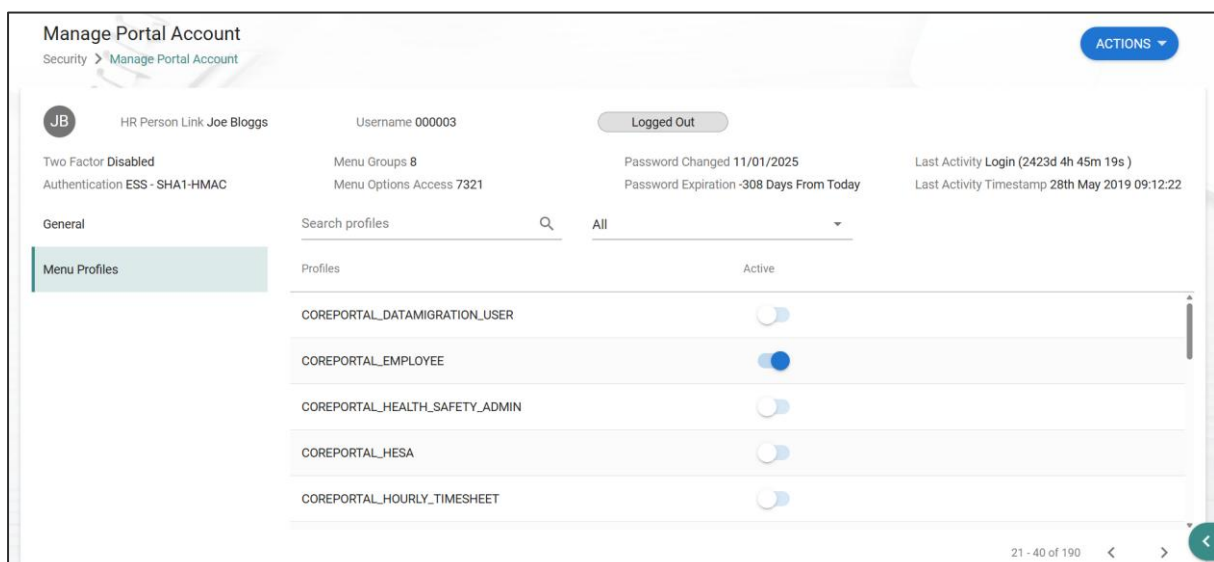

2. Use the search function to do a keyword search for a Menu Profile.
3. Select the **Active** indicator to assign a Menu Profile to the user.

4. To revoke a Menu Profile i.e. remove a user's access, ensure that the Active indicator is off.
5. Changes on this screen are automatically saved.

6.3. XD Back Office User Accounts

As part of the Move to Portal project PeopleXD functionality is migrating from back office to Portal. Access to back office may be required for functionality that has not yet migrated.

 **Note:** Back office is accessed using a separate URL to Portal. This will have been provided to your primary administrator during your initial implementation.

6.3.1. Create New Back Office User

To add a new XD back office user account:

1. On the System Users widget, click **Create New User**.
2. Select **Back Office** from the User Type drop-down menu.
3. Enter a Username.
4. Enter a Password.
5. Enable the **Manage Account on creation** setting to go straight to managing the users access to the system.
6. Click **OK** to create the user.
7. Select an employee from the drop-down list to link the account to an existing employee record.
8. Click **OK**.

6.3.2. Configure Back Office User Account

To configure a back office user account:

1. Go to the Manage Portal Account screen for the user.
2. Click the **General** tab.
 - From the Data Base Profile drop-down menu select Manager or End User.
3. Click the **Menu Profiles** tab.
 - Enable the relevant toggles to assign the applicable menu profiles.
4. Click the **Menu Options** tab.

-
- Review the menu options assigned.
5. Click the **Object Profiles** tab.
 - Enable the active toggle for COREHR OBJECT PROFILE.
 - Enable the relevant toggles to assign the applicable object profiles.
 6. If required click **Link to HR Person**.
 - Select an employee.
 - Click **OK**.
 7. Navigate to the **Set Up** tab in the Security dashboard.
 8. On the System Set Up widget click **OPEN** next to the Corehr Security option.
 9. Enter the password *university*.
 10. Click **Submit**.
 11. Select **Back Office Account**.
 12. Click the filter icon.
 13. Select a Username.
 14. Click **Filter**.
 15. Select a **Company** from the drop-down menu.
 16. Enable the toggles for the required modules.
 17. Click **Save**.




Note: If an account is not linked to an employee number this needs to be done from Back Office as on Portal the username will not be found. In Back Office, you need to go to CoreHR > Security (the password is *university*).

7. System Data Access

7.1. Configuring Data Access by Product

Each People XD product requires its own level of data security. As such, the configuration training for each product will cover this in the required detail.

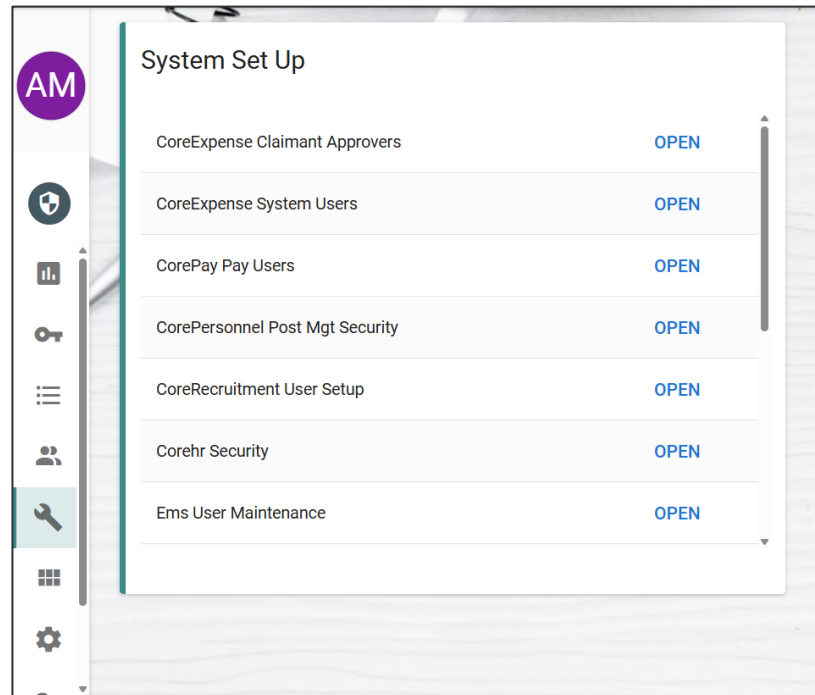

The **Set Up** tab on the Security dashboard includes the option to jump directly to some of the required screens to update this centrally for users.

Option	Product
CorePay Pay Users	Payroll
CorePersonnel Post Management	CorePersonnel / People Management
CoreRecruitment User Setup	Recruitment
CoreTime System Users	Workforce Management
CoreExpense Claimant Approvers	Expense

CoreExpense System Users	Expense
System Users	Security Types: Diversity Access, Document Access, FEC Access, HESA Security, Health and Safety Access, Letter Template Access, Personnel Access, Process Access, Recruitment Access, Salary Access, Sensitive Department Access, Training Access, User Defined Access

8. Other Settings

8.1. System Setup Widget

The following additional setup options are available on the Set Up tab. Access 'system users' screens for some products, to manage user data level access.

Option	Additional Information
Corehr Security	Advanced user security feature. PeopleXD use only.
Ems User Maintenance	Refer to EMS configuration training.
Installed Systems	Advanced user security feature. PeopleXD use only.
Menu Options	Advanced user security feature. PeopleXD use only.
Parameters	Advanced user security feature. PeopleXD use only.
Synonyms	Advanced user security feature. PeopleXD use only.
User Groups	Advanced user security feature. User Groups allows for different areas of the organisation to be individually responsible for their own sets of users. PeopleXD use only.
Product Specific	1. XD Expense Claimant Approvers, 2. XD Expense System Users, 3. XD Pay Pay Users, 4. XD Personnel Post Mgmt. Security, 5. XD Recruitment system Users, 6. XD Time System Users, 7. System Users


 **Note:** These options control either: Advanced elements of XD Security, or Product specific security. Their use will be referenced where required in the corresponding training material. Each option will not be covered in detail here. For advanced security features, please do not update any configuration. These settings will be managed by CoreHR on behalf of each organisation.

8.2. Content Security Policy

By default, content hosted outside of the PeopleXD application cannot be viewed/embedded, this includes custom video pages e.g. like those used in the new Social Onboarding feature. This is to ensure a level of control, protection and security.

If an organisation wishes to include embedded content on PeopleXD, the relevant sources must be added to the Content Security Policy widget in Security. If a source is not listed here, the content will not display as required in PeopleXD. We recommend that you follow up with your own Security/Technical teams for guidance on the required sources for your content.

An example of this is the use of embedded videos for Social Onboarding. Video sources must be listed in the CSP widget. If they are not, the video will be blocked, and a user will not be able to play it.

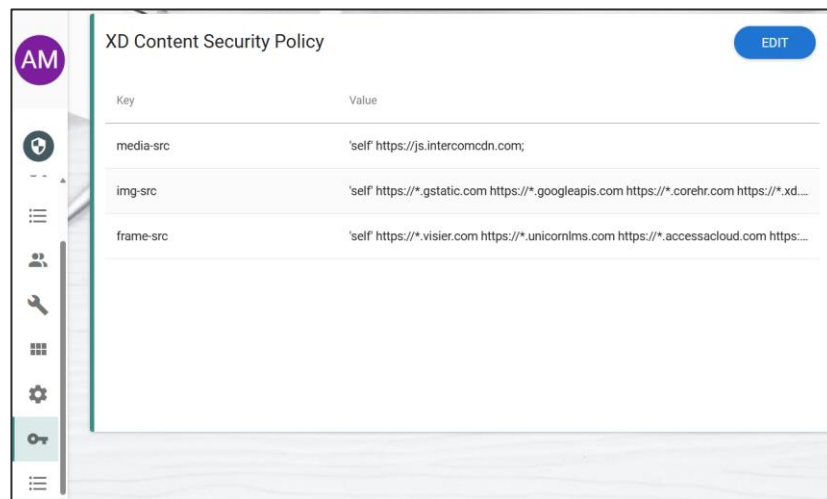

8.3. Production Environment Warning

The Production Environment Warning message displays automatically to a user on opening the Security dashboard, if the following elements of configuration are still present or enabled:

PeopleXD Generic User Accounts:

- PORTALADM
- PORTALESS
- PORTALMSS
- PORTALUPG

These accounts can be activated or deactivated at your own discretion. Please be aware that if these accounts are deactivated it may impact PeopleXD having access using Service Accounts to your environment if required to assist with supporting you through queries with PeopleXD.

Session Mode Parameters:

- Session Expire Mode Enabled
- Session Cache Mode Enabled

This includes the option to jump to a new screen to directly update these settings:

- Click **No** to close the message, OR
- Click **Yes** to act on the accounts/settings.

To deactivate these settings:

1. Click **Deactivate** for each of the accounts listed.
 - This list only displays active accounts. If any of the generic portal accounts have already been deactivated, they are no longer listed here.
 - When an account is deactivated, it still exists on PeopleXD but is inactive.
2. Switch off the indicators:
 - Session Expire Mode Enabled
 - Session Cache Mode Enabled

Changes are saved automatically.

8.4. User Sessions

This widget allows you to view information about all back office users such as the last time they logged on, where they connected to, if the user is currently logged on and any locked objects can also be identified.

Sample uses of this screen are:

- To identify redundant accounts
- To identify accounts where passwords are about to expire
- To identify locked sessions
- To kill sessions which are locking the database
- To lock all users out of the database temporarily

To access User Sessions:

- Select the **User Sessions** tab
- All sessions are displayed on the User Sessions Widget

8.4.1. To Lock all User Accounts

Select 'Lock All Accounts' from the Action menu.

8.4.2. To Unlock all User Accounts

Select 'Unlock All Accounts' from the Action menu.

9. XD Security Reporting

9.1. Menu Profile Report

Note: To enable the Standard Report functionality the following menu option will need to be enabled: 'Portal - Insight Admin'. It is recommended if you wish to use the Security Standard reports you would enable this menu option against PortalMigration_Security menu profile for your security admins.

Standard Reports for Security Reporting can be accessed under the Insight Dashboard > Admin Area from the navigation panel and then Standard Reports from the Dropdown menu.

When you select a standard report to run the Enter Report Prompts pop up will appear for you to enter the parameters for the report such as Username & Menu Profile.

The listed Insight views allow a user to report on specific user profiles, menu profiles and menu options which was previously done through the User/Menu Profile Form.

Back Office Form	Portal Widget	Standard Reports
User/Menu Profile Reports	Insight Standard Reports	User Profile - User Details, User Profile - Menu Profile, User Profile - IP Address, User Profile - Database/Objects Profile, Granted Options, Menu Profile - Users
Logon/Option History	Insight Standard Reports	Option History, Logon History

9.2. Portal User Report (Standard Report)

A standard report is available to report on user Portal User Accounts: "Portal User Report"

AM	Admin Area	ACTIONS
	All Reports	
	user report	Standard Reports
	Report Name	Report Owner
		Last Edited
		Shared
		Viewed
		Locked
	Standalone Reports	
	Portal User Report	Standard Report
		0
		N/A

9.3. Portal Migration Report

Insight can be used to review and report on which users have been granted access to the Security & Insight Dashboards by following the below steps through Insight.

From the Insight Dashboard create a new report under the Core Statistics Business Area and select the below two views 'Menu Profile' and 'Person Granted Option'.

These views will return the data specifically the 'Person Reference' and 'Menu Profile' columns. This report can be filtered to return only users who have been granted access to the PortalMigration_Security menu profile.

9.4. Logon/Option History

These views & reports will allow a user to report on and show details on a user's logon/option history. The report will list all logon and menu access activity for the selected users.

9.5. Database Profile

Under the Core Statistics business area there is a view called 'Database Profile' which can be used to report on Database Profiles.

10. Self-Registration

 **Note:** If Self Registration is currently not configured, PeopleXD provide Services via our Professional Services team to assist in roll-out of Self-Registration solutions.

10.1. What is Self-Registration

The 'Self Registration' functionality on PeopleXD allows for the automatic creation of user accounts for employees on Portal. At a very high-level, this includes:

- A nightly process identifies any new employees who do not have a Portal account
- Employees will receive an email invitation including a link to register for their Portal account. That link directs the user to a 'Self-Registration Form'
- The employee will be required to provide various details to validate who they are as part of this process. These details include an SMS token, PPS/NI Number, Bank Account, Security Questions. However, the options are configurable per organisation's requirements and the Authentication Type in use
- Once an employee provides the necessary details, they can activate their account
- A user account is generated on Portal for the employee, and it will be assigned the required default menu profiles to control their access to the system

This is a highly configurable feature on PeopleXD. This document will provide details on all of the configurable options available to support this process e.g. what is the required authentication type; how to exclude employees; how to manually kick-off the nightly process; how kick off the process for one employee; what emails should be sent; how should a user be validated on the self-registration form, how can the process be reported on etc.

10.2. Self-Registration Profiles

A Self-Registration Profile is used to manage all of the rules that are required to be set to support an organisation's user account management via Self-Registration. The Profile is used to define:

- The required Authentication Type
- Validation Rules (by SMS, PPS/NI Number, Bank Account, Security Questions)
- The Invitation and Confirmation emails sent to a new user
- The rules surrounding the availability of the self-registration form to the user

-
- The default Menu Profile(s) assigned on successful user account setup
 - Any groups of employees that should be excluded from the self-registration process

Only one Self-Registration profile can be active at any given time. A new profile can be created and flagged as the current profile, if required.

10.3. Authentication Types

There are 3 Authentication Types available to configure on PeopleXD. A PeopleXD Self-Registration Profile will be configured in line with an organisation's required Authentication Type, as depending on the type in use, there are different validation and authentication options available on PeopleXD.

10.3.1. In Application Password Process

- Also referred to as ESS or 'Native Authentication'
- Username and password is managed on PeopleXD
- The user account will be subject to the 'Password Policy' defined on the PeopleXD Application i.e., the COREPORTAL Account Profile

10.3.2. Single Sign On (SSO)

- Password is not stored on PeopleXD
- Authentication is delegated to an LDAP (e.g. Microsoft Active Directory)
- LDAP allows for a user to logon to shared applications on their network using a single username and password
- A user will log on to PeopleXD using their LDAP account. The LDAP will manage the Password Policy i.e. this is not linked to the COREPORTAL Account Profile
- User will provide their login credentials i.e. 'authenticate' on every login to PeopleXD

10.3.3. SAML

- This is an extension of SSO
- User is required to provide their login credentials i.e. authenticate with an iDP provider
- PeopleXD can automatically login the user in if they have authenticated with the iDP provider

 **Note:** For customers wanting PeopleXD in Workspace & SSO, the only option is SSO configured in Identity via OIDC. All employees must be using SSO as mixed authentication types are not supported.

Please see the [PeopleXD Security: Self Registration – User Guide](#) for further details..

11. FAQs

Why am I seeing information incorrectly displayed in Portal?

Do others have access to the user account that you are testing with? This can cause information to display incorrectly in Portal if they use the account at the same time as you.

If it is a case where you are logged out of portal for some reason, then you will be taken to the login screen.

My colleague and I have the same access, but I cannot complete some of the same actions on screen as her?

Once menu/data access is ruled out, the next likely issue is that the browser that you are using does not align with the supported browsers. Please refer to the certification matrix provided in the release notes for each major version.

Why can't I see the Pension Widget in Portal?

Please ensure that the employee has access to the correct menu profile via Portal >> Admin Menu >> User Management >> Menu Security e.g. COREPORTAL_PENSION.

Why am I not receiving my Portal 'request new password' email?

What frequency does your email processing job run at? Has the sufficient length of time elapsed for it to be sent?

Sometimes a user may enter the wrong username or DOB for example and the email won't send. A reset password email will only send if all of the credentials entered are correct.

Wording that has been configured in the language pack for the login screen for Portal is not displaying?

This feature is no longer available in the newer versions of the software. What you can do is update the text along the bottom of the screen or update the logo if you want text to be displayed.

Can you turn off 'Account Activity' in the Quick jump menu?

The "Account Activity" cannot be turned off for security reasons. Users can track their logon history in case another user logged into their profile. You can disable the functionality on this screen but cannot disable it. You cannot re-name it in the quick jump to 'blank' either as it does not allow blank values.

I am Unable to log into Portal using a password created.

Once past login page screen displays asking for a change in password which when changed and clicked 'Change Password' error message says 'ACCESS DENIED'

This is controlled via the menu option called "Core Web Ess Menu - Change Pin".

What is the recommended zoom to use on your browser when running Portal?

The software has been quality assured at 100% zoom as there are issues with the ext. framework when less than 100% zoom is used. PeopleXD recommend using a 100% zoom resolution going forward.

Why is there a drop-down icon next to the PeopleXD logo on the top left hand corner of Portal?

This is in place for Navigation Slide functionality. If you set admin setting CP_DASHBOARD_NAV to Y, then users can navigate through their dashboards via quick slide.

Why are personnel numbers displaying in People XD System Users and on the User Maintenance screen?

The reason you are seeing all employee numbers on this screen is because of a change in functionality in Recruitment & HR Admin.

There is now a mandatory script which is run as a standard in all upgrades which populates all of the personnel numbers and backoffice usernames to display on the System User and User Maintenance screen.

12. Menu Options Required

12.1. Moving from Back Office to XD Portal

A new menu profile PortalMigration_Security will automatically be assigned to users who have access to Security Product in back office as part of our release process.

This menu profile will give a user access to the following:

- All widgets on the Security Dashboard on Portal
- The Core Statistics Business Area in Insight which will support a user being able to create and run Security Reports

12.2. Security in Quick Jump

The following menu option provides access to:

- Security in **Quick Jump** menu
- Read only access to the system users widget

System	Menu Option
CoreSecurity	User Management - View

12.3. Access to Manage Account Screen

The following menu option is required to access and update the General tab for an employee/user account.

System	Menu Option
Security	User Management - Update

12.4. Menu Profiles

The following Menu Option is required to:

- View and update menu profile assignments for users on the System Users widget for a chosen user
- View menu profiles on the Menu Profiles widget for a chosen user but cannot save changes

System	Menu Option
Security	Menu Profiles - View Only

The following Menu Option is required to add, delete & edit (including change name and menu option updates) via the Menu Profiles widget:

System	Menu Option
Security	Menu Profiles - Update

12.5. Lockout System

The following menu option controls access to view and use the Lock System functionality on the Current Status widget.

System	Menu Option
Security	System - Product Lockout

12.6. Password Policy/Account Profiles

The following menu option is used to provide access to view the Password Policy widget and view details for a selected Account Profile.

System	Menu Option
Security	Password Policy - View Only

The following option provides access to add, delete, edit (including change name and policy details updates).

System	Menu Option
Security	Password Policy - Update

12.7. 'Product Access' & 'Current Status' Widgets

This menu option provides access to the following:

- Current Status
- Product Access

System	Menu Option
Security	System - Product Access

12.8. Set Up Tab Options

To access the System Set Up widget on the Set Up tab, the following menu option is required.

System	Menu Option
Security	Advanced Setup

Each option on that widget requires further menu access:

Set Up Item	System	Menu Option
CorePay Pay Users	Security	Advanced Setup - CorePay
CorePersonnel Post Management	Security	Advanced Setup - Coreperssonel System Users
CoreRecruitment User Setup	Security	Advanced Setup - Corerecruit User Profile
CoreTime System Users	Security	Advanced Setup - CoreTimeSystem Users
CoreExpense Claimant Approvers	Security	Advanced Setup - Coreexpense Claimant Users
CoreExpense System Users	Security	Advanced Setup - Coreexpense System Users
Security	Security	Advanced Setup - Security
Installed Systems	Security	Set Up - Installed Systems
Menu Options	Security	Set Up - Menu Options
Parameters	Security	Set Up - Parameters
Synonyms	Security	Set Up - Synonyms
User Groups	Security	Set Up - User Groups

12.9. Content Security Policy

The following 2 menu options are required to use the Content Security Policy widget:

System	Menu Option
Security	View Content Security Policy
Security	Update Content Security Policy

12.10. User Sessions

The following 2 menu options are required to use the User Sessions Widget:

System	Menu Option
Security	User Session - View Only
Security	User Session - Update

12.11. Web Services

The following 2 menu options are required to use the Web Services Widgets:

System	Menu Option
Security	Configuration of Whitelisted Web Service Application Types
Security	Add and Configure Applications for Web Services

12.12. System Parameters

12.12.1. Page Referral Security

The following parameter must be enabled in CorePortal > Site Manager > Admin Settings for Security to appear on the Quick Jump menu.

Parameter	Value
Pagereferralsecurity	Y

12.12.2. Product Access

The following parameter must be enabled in CorePortal > Site Manager > Admin Settings if using the Product Access feature.

Parameter	Value
Cp_check_product_access	Y

12.13. Dashboard Configuration

The Security dashboard is not available on the Dashboard Configuration screen. All tabs are available as standard and cannot be removed or reordered. Access to certain widgets/functions is controlled by menu options, as reviewed earlier in this document for the relevant features.