



HP Insight Online

User's Guide

Document Release Date: June 2014

Software Release Date: June 2014

Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notice

© Copyright 2014 Hewlett-Packard Development Company, L.P.

Contents

Contents	3
Chapter 1: Overview	5
Chapter 2: Sign in and complete device registration	6
Complete direct connect device registration	7
Edit service information	9
Chapter 3: Manage your devices	11
The All devices view	11
Types of objects in the All devices view	12
Device groups	12
Solutions	13
Devices	16
Your default device group	17
Refresh devices	19
Manually added devices	19
Devices with expired contracts or warranties	20
Deleting devices	20
Create, maintain, and delete device groups	21
Roles and administrator types	23
Chapter 4: Reports and messages	26
Reports	26
Message log	26
Chapter 5: Service Credits	28
Overview	28
Administrator and member roles	29
My Service Credits	30
My services	30
My orders	31
Shop HP services	31
Chapter 6: HP Authorized Channel Partners	33
Overview	33

Types of HP Authorized Channel Partners	33
Enabling access to customer's device information	33
The My Customers view	34
Service levels	37
Removing customer groups from the view	38
Chapter 7: Manage contracts and warranties	41
Derived contracts and warranties	41
Link contracts and warranties	42
Share contracts and warranties	44
Display your user name and email	46
Batch link tool	46
CSV file size and requirements	48
Upload status values	48
CSV file field values	49
Chapter 8: Support and other resources	51
Contacting HP	51
HP Authorized Channel Partners	51
Documentation feedback	51
Related information	51

Chapter 1: Overview

HP Support Center (<http://www.hp.com/go/hpsc>) is home to HP Insight Online. Through Insight Online, you and, optionally, HP Authorized Channel partners, have web access to *feature services* such as:

- *Devices*, which provides the ability to organize and monitor your *managed devices*.
- *Service events*, generated and reported to HP by managed devices.
- *Support Cases* associated with your HP Passport ID.
- *Contracts and warranties* associated with your HP Passport ID, or shared with you by other users.
- *Service credits*, which allows you to view Proactive Service Credits you have purchased, and HP Proactive Select Services exchanged and available for exchange for those credits.

These features are available for your *managed devices*, which are devices that typically have a management protocol such as SNMP or WBEM installed. Managed devices include:

- Servers, storage systems, solutions and switches, registered for remote support using the *central connect* method. With central connect you register the device to communicate with HP through an HP Insight Remote Support (RS) centralized Hosting Device in your local environment.
- ProLiant Gen8 servers registered for remote support using the *direct connect* method. This method is available using HP iLO Management Engine 4 1.40 or later, or Intelligent Provisioning 1.60 or later.
- BladeSystem c-Class enclosures registered for remote support using the direct connect method. This method is available using the Onboard Administrator (OA) 4.11 or later.

Chapter 2: Sign in and complete device registration

To use the various feature services of Insight Online you must sign in using your HP Passport ID. You can then complete device registration if needed. Successful device registration assumes you have done the following:

- For devices that use the central connect method, you have correctly installed and configured Insight RS, and specified your HP Authorized Channel Partners in the Hosting Device Setup Wizard.
- For devices that use the direct connect method, you have registered using the iLO or OA interface, and completed the registration process in Insight Online. The registration process in Insight Online includes specifying HP Authorized Channel Partners. See [Complete direct connect device registration](#).

Detailed information about setting up these devices is available in the *HP Insight Remote Support and Insight Online Setup Guide for ProLiant Gen8 Servers and BladeSystem c-Class Enclosures* (<http://www.hp.com/go/insightremotesupport/docs>).

Another user in your company may have completed this registration process, and shared the contract and warranties or devices with you. In that case you can simply sign in to Insight Online using your HP Passport ID and see the devices.

To create the link to your devices, sign in to Insight Online through the HP Support Center (<http://www.hp.com/go/hpsc>), using your HP Passport ID and password as shown in the figures below:

Figure 2.1 Sign in to the HP Support Center


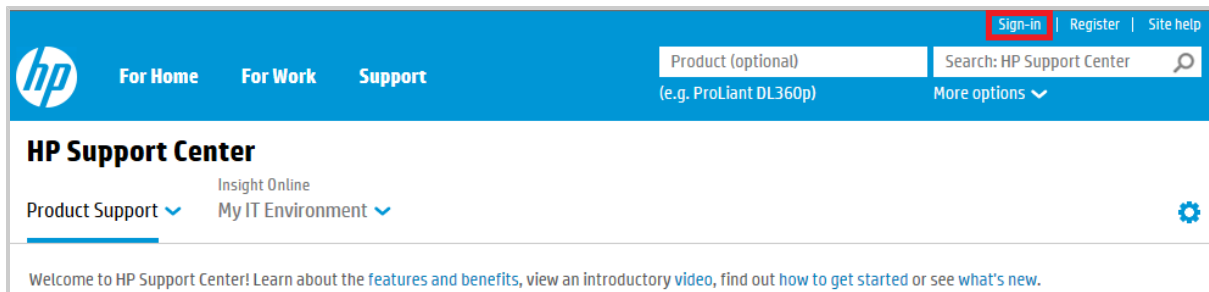


Figure 2.2 HP Passport Sign-in

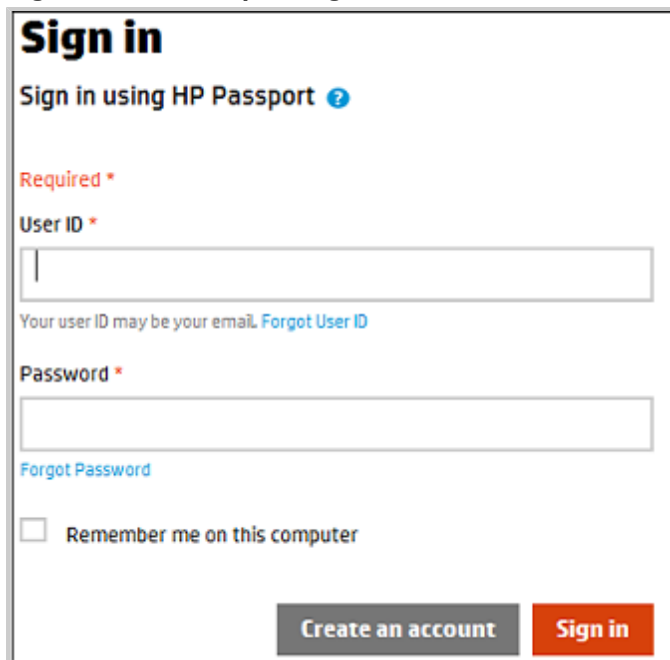

Sign in

Sign in using HP Passport ?

Required *

User ID *

Your user ID may be your email. [Forgot User ID](#)

Password *

[Forgot Password](#)

☐ Remember me on this computer


[Create an account](#) [Sign in](#)

Complete direct connect device registration

Once you have signed in, devices that have been registered using the central connect method will be visible in Insight Online without any action on your part. However, for devices registered using the direct connect method, you must complete the registration process in Insight Online. Once you have signed in:

1. Click on the **Insight Online My IT Environment** tab. The Dashboard appears.
2. Click on the **Complete Registration** link in the **Devices** section:

Figure 2.3 Complete registration from the Dashboard

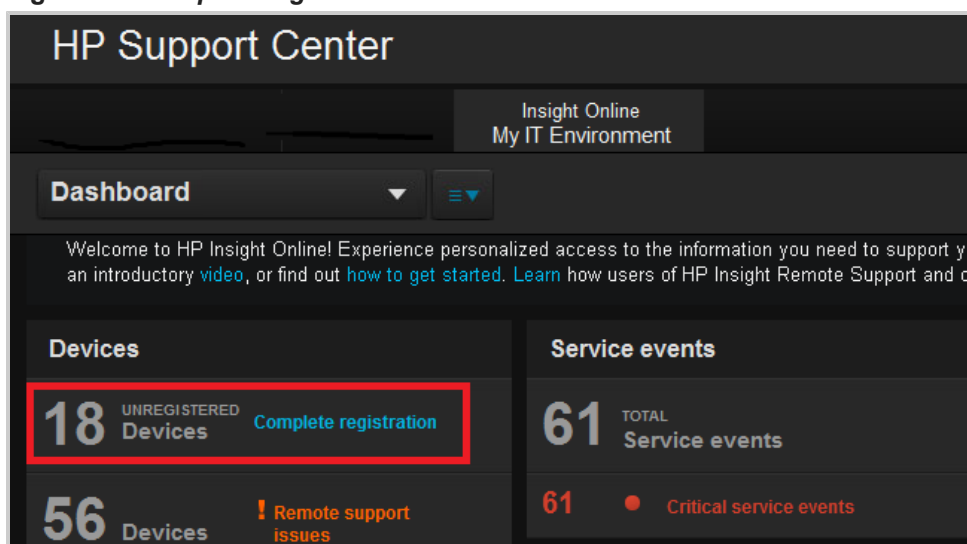

HP Support Center

Insight Online
My IT Environment

Dashboard

Welcome to HP Insight Online! Experience personalized access to the information you need to support your devices. Watch an introductory [video](#), or find out [how to get started](#). [Learn](#) how users of HP Insight Remote Support and on-demand support can help you.

Devices	Service events
18 UNREGISTERED Devices Complete registration	61 TOTAL Service events
56 Devices ! Remote support issues	61 Critical service events

3. The **Complete device registration** page appears. Select one or more devices, then click **Next**. You

can complete registration for multiple devices at one time if they share site, contact, and channel partner information.

4. Enter site and support information, then click **Next**. The **Provide HP Authorized Channel Partner Information** page appears.
5. Do one of the following:
 - Accept the default settings if support for your IT infrastructure is provided by HP.
 - If support is provided by an HP Authorized Channel Partner, enter the partner location ID for an HP Authorized Service Partner or HP Authorized Reseller.Click **Check ID** to verify that the correct partner is selected.
6. Select the **Optimize my IT environment** check box to allow HP or an HP Authorized Channel Partner to contact you about optimizing your HP environment. If you choose to have a channel partner manage your devices, select this option to allow the partner to see configuration details for the devices.
7. Click **Next**. The **Validate and Submit** page appears.
8. Click **Complete Registration**.

If you select more than fifteen devices:

- The registration is submitted by a batch process, whose name is "DC_REG" plus the timestamp in Coordinated Universal Time (UTC). For example:
DC_REG 2013-10-30 12:39:59:999 UTC
- You will be prompted to continue and to optionally provide an email address to receive a notification that the batch process has begun, and a notification when it has completed. Use the batch process name to look up the status of the process in your message log.
- Devices in the list are grayed out if you do not have administrative privilege to modify them, or if they are part of a current batch process submitted by you or another user. When you receive the email saying the batch process is complete, you can click on the refresh devices button to remove the devices included in your batch process from the list, and to update the count of unregistered devices on the dashboard.

The email notifications contain summary status information and a link to your message log which contains more details.

If you select fifteen or fewer devices:

- The submission occurs interactively and the result appears on the next page with status about registration and about contract and warranty linking.

When you complete registration, if you provided partner information and selected to have your IT environment optimized, the partner will be able to view and manage your devices from the **My Customers** tab. See [HP Authorized Channel Partners](#) for more information.

You can change the partner information, contact information, and the optimize my IT environment selection for direct connect devices at any time:

- By group. See [Edit service information](#).
- By individual device. Click on the device, and in the **Configuration** area of the **Overview** tab, click on the **Edit** links in the **Partners** and **Contacts** sections:


Figure 2.4 *Change partner and contact information on an individual device*

The screenshot shows a configuration page for an individual device. It is divided into two main sections: **Partners** and **Contacts**. The **Partners** section includes a header with an **Edit** link, followed by fields for **SERVICE PROVIDER** and **SALES PROVIDER**. Below these is a link: "Authorize HP or my HP Authorized Reseller/ Distributor to contact me to discuss optimizing my IT environment." The **Contacts** section has a header with an **Edit** link, followed by fields for **PRIMARY SUPPORT CONTACT** and **SECONDARY SUPPORT CONTACT**. The **SECONDARY SUPPORT CONTACT** field has a **Remove | Edit** link. At the bottom is a **SITE INFORMATION** section with an **Edit** link. Red boxes highlight the **Edit** links in the Partners and Contacts headers, and the **Remove | Edit** link for the secondary support contact.

Edit service information

Once direct connect devices are registered, you can edit their site, support contact and partner information as a group. Select **Edit service information** from the Dashboard or Devices, to reach the page:

Figure 2.5 *Edit service information from the Dashboard*

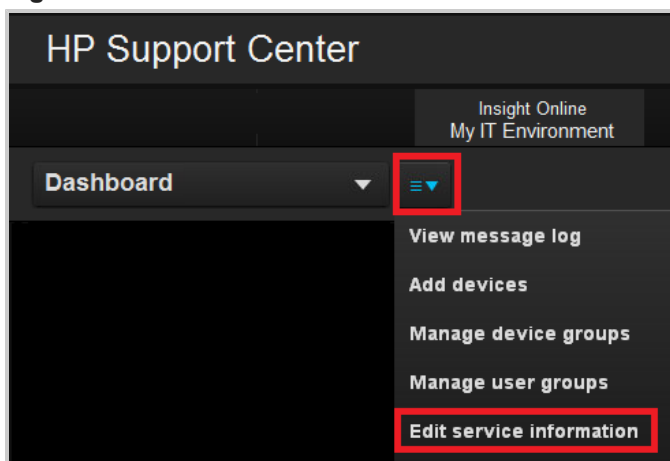

Then complete the following steps:

1. Select groups from **Select device groups** and click **Next**. The list shows only device groups that contain direct connect devices that you have administrative privileges to modify:

Figure 2.6 Edit service information

Edit service information		
1. SELECT DEVICE GROUPS		
Select groups Use this process to edit service information for selected Insight Remote Support Direct Connect devices. Only groups that you have access to contain Direct Connect devices you have administrative privileges for will be shown. All edits will be processed offline and you may be notified by email. Showing 1-50 of 210 ◀ 1 2 3 4 5 ▶ Last View all		
Select	Group name	Group description
☐	Group 1 or [Root group]	Description
☐	Group 1 / Subgroup1	Description

2. **Select target devices** whose information you want to change and click **Next**. Only direct connect devices that you have administrative privileges to modify are listed.
3. **Edit service information**. Edit site, primary and secondary service information and support contact information. Select an HP Authorized Channel partner. You can select HP or if you select a different partner, provide that partner's location ID. Select to optimize your IT environment. That is, consent or do not consent to having HP or an HP Authorized Channel Partner contact you about optimizing your environment. Select this option if you plan to have an HP Authorized Channel Partner manage your devices. See [Enabling access to customer's device information](#) for details.
4. **Validate and submit** the new information.

The changes are applied to all the devices you selected. Changes are submitted by a batch process. The name of the batch process is "DC_EDIT" plus the timestamp in Coordinated Universal Time (UTC). For example:

```
DC_EDIT 2013-10-30 12:39:59:999 UTC
```

You are prompted to continue and to provide an optional email address to receive a notification when the batch process has completed.

Devices included in a batch process submitted by you or by another user remain in the device list but are grayed out. When you receive the email notification that your batch process is complete, you can click on the refresh devices button ([Refresh devices](#)) to return the devices included in that process to their normal state.

The email notifications contain summary status information and a link to your message log. Use the batch process name to look up the status of the process in the message log.

For central connect devices, you must change this information in the Insight RS Hosting Device user interface.

Chapter 3: Manage your devices

When you first sign in, the Dashboard is the initial display. Click **Devices** on the left or select **Devices** from the main menu to navigate to the **All devices** view:

Figure 3.1 *Devices in the Dashboard*


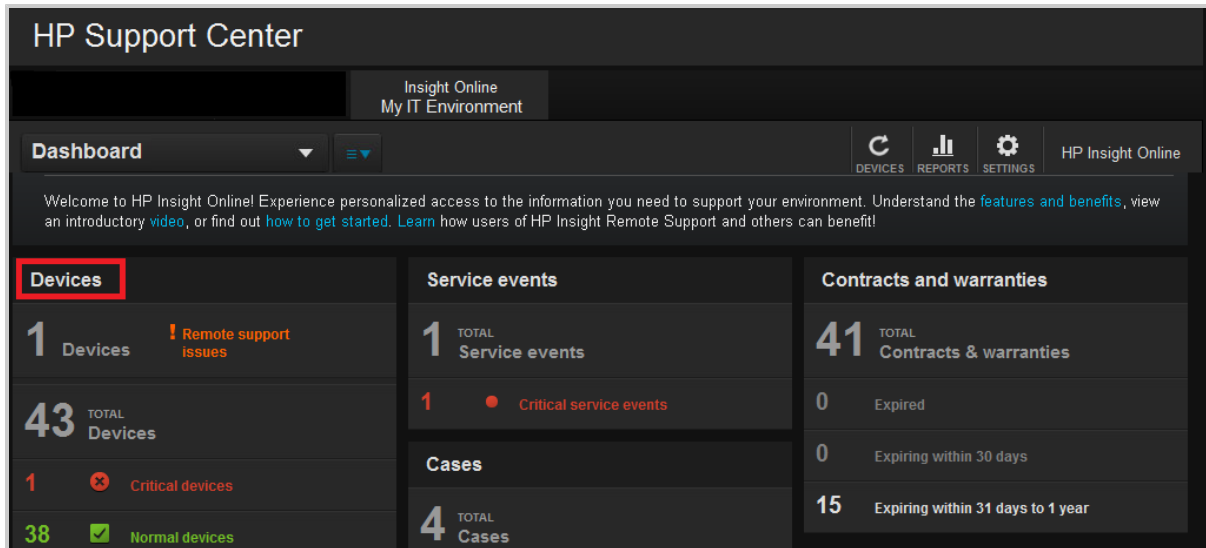


Figure 3.2 *Devices in the main menu*

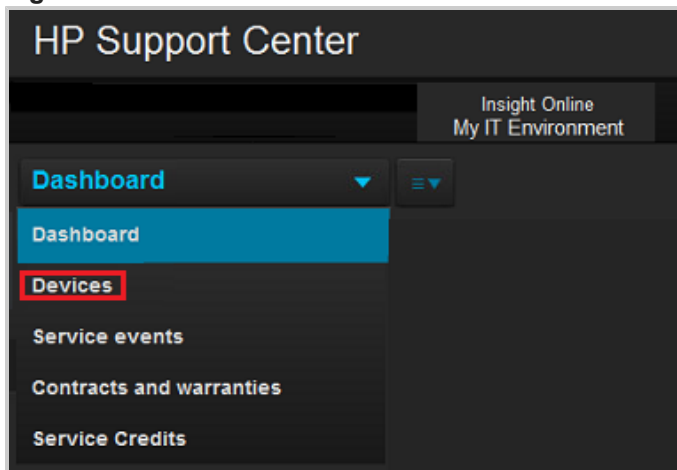

The All devices view

The **All devices** view is similar but not identical to a view of your default device group. (See [Your default device group](#).) The **All devices** view is a mixed view, containing:

- Device groups shared with you by other users ([All devices view](#), [device groups](#)). These device groups may be top-level groups, child groups, or lowest-level groups, in the environment of the user who shared the group with you.
- Second-level (child) device groups you created.

- Individual devices registered using the direct connect method, whose registration must be completed.
- Individual devices in your default device group that you have not put into a child group.
- Individual devices that you have put into a child group, that you have not removed from your default device group.
- Solutions

Objects in the All devices view are displayed in the following order:


1. Device groups
2. Hosting devices (physical and virtual machines)
3. Solutions
4. Incompletely registered devices
5. Critical devices
6. Normal devices
7. Manually added devices

By default these are sorted by status. From the **View** drop-down menu you can sort by name, and filter by device type (critical, normal, non-remote), problem (monitoring, collections), and overdue communication.

Types of objects in the All devices view

The All devices view contains three types of object: device groups, solutions and devices.

Figure 3.3 *Device group, solution, devices*

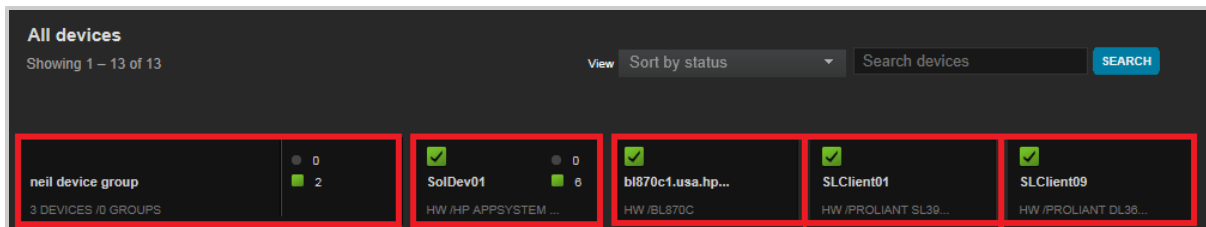

Device groups

A *device group* is a container that you create or that another user has shared with you. Each device group displays the following:

Table 3.1 *Icons and text in device groups*

Icon or text	Meaning
Group name	User defined. If the name is truncated, hover over the name to see the complete version.
 Red circle	Devices in the device group with critical service event status.

Icon or text	Meaning
 Green square	Devices in the device group with normal service event status.
 Orange exclamation point	One or more of the devices in the group has a remote support issue. Hover over the device group to see the number.
Device total	Number of devices in the device group.
Group total	Number of child groups in the device group. For device groups shared with you, this total only includes the number of child groups within that have been shared with you. (Sharing a device group does not automatically share child groups within it.)

Hover your mouse over a device group to see summary information such as totals for critical service events, devices with remote support issues, cases, and expired contracts and warranties. Click on a summary to view details. Click on a device group to see devices and child device groups within it.

You can create two levels of device groups below your default device group. Your default device group can contain child device groups (second level) which can in turn contain child device groups (third and lowest level). Create second- and third-level child groups as a way to organize large numbers of devices into categories.


Solutions

A *solution* is a collection of devices configured together for a specific business purpose. Solutions are created and managed in Insight RS and are read-only in Insight Online. In Insight Online, solutions have characteristics of both devices and device groups. The differences can be seen in two contexts, "solution as container", and "solution as device", explained below.

Solution as container


A solution behaves like a device group, in that it contains devices, and its details screen lists totals for the devices it contains. In Insight RS, the devices in the container are the components you add to a solution.

1. In the All devices view, click on a solution:




The resulting screen displays the devices in the solution, similar to a device group:

Figure 3.4 Solution as container

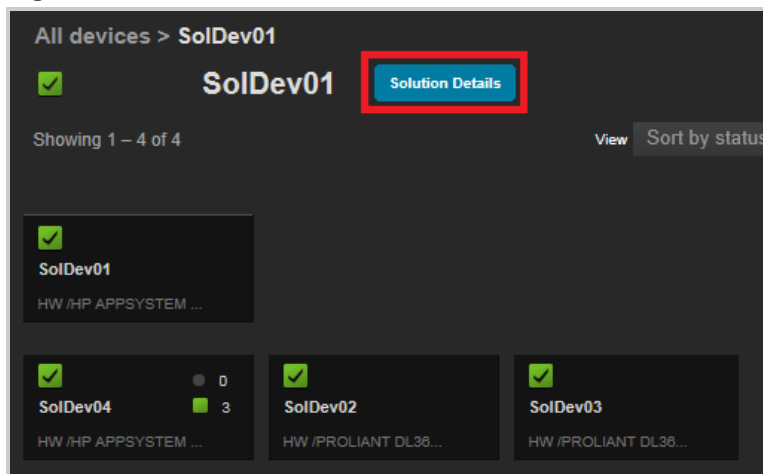


2. Click on the Solution Details button to view solution details, similar to a device group details screen:

Figure 3.5 Solution details

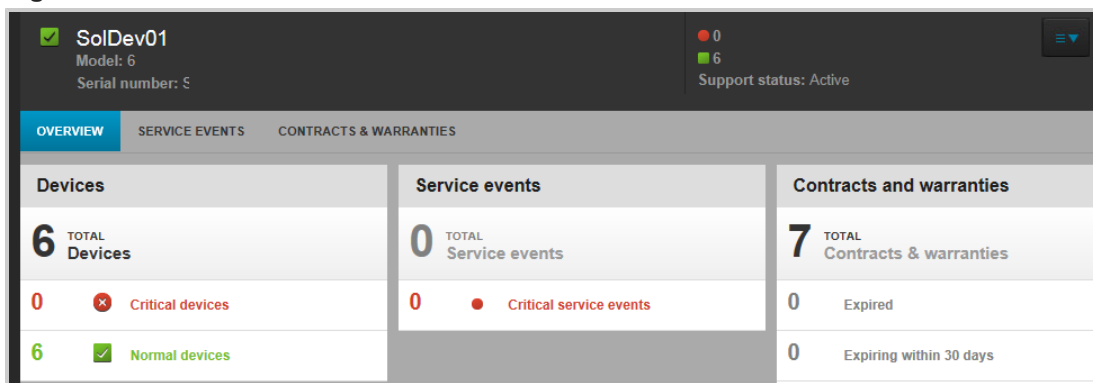

You can also reach the solution details by hovering over the solution in the All devices view to reveal the Solution Details button:

Figure 3.6 Hover over solution

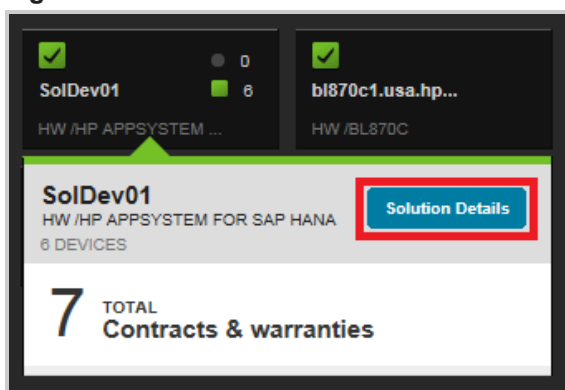

Solution as device

In the All devices view, a solution looks like a device. The solution is associated with a particular device, which you specify in Insight RS when creating the solution, using the following fields:

- Name
- Type
- Serial number
- Product number
- Product model
- Custom delivery ID

In the All devices view of Insight Online, view the details of the *solution as device* as follows:


1. Click on a solution. The resulting screen displays the devices in the solution, similar to a device group. In addition, the device associated with the solution itself is listed first, on its own row.
2. Click on the device in the first row to view the details of the device.

Figure 3.7 Solution as device



The device details are similar to those of any other device:

Figure 3.8 Solution as device details

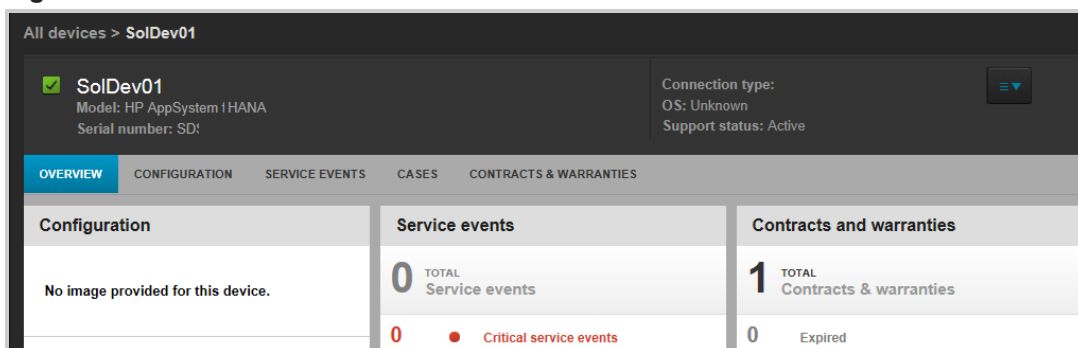

Devices

A device may be in different states:

- Incompletely registered (direct connect only)
- Remote health status displayed (direct connect only)
- Critical
- Normal
- Manually-added (so not remotely supported)

A device can be an Insight RS hosting device. An Insight RS hosting device may be a virtual machine or a physical server. In both cases the Insight RS hosting device:

- Will appear in the device view as a normal device, named "Insight RS host"
- Can be added to child device groups
- Is part of the device count, both overall and within device groups

When the Insight RS hosting device is a virtual machine, it is not included in counts of service events, remote support issues, cases, or contracts and warranties, and information about those features is not available. Its device type is listed as a type of virtual platform.

When the Insight RS hosting device is a physical server, the device type and model of the physical server are displayed.

For individual devices, the view displays the following:

Table 3.2 Icons and text in individual devices

Icon or text	Meaning
Incomplete	A device was registered using the direct connect method, and its registration must be completed. Click on the device to complete its registration. Devices with incomplete registrations will remain in your default device group, or in default device groups shared with you by other users. Once you or another authorized user has completed its registration you can move the device to a child group.
 Orange exclamation point	Device has a remote support issue.
 Green square with check	Device has normal service event status.
 Red circle with X.	Device has a critical service event.

Icon or text	Meaning
Device name	Typically a name you entered, when registering the device. Otherwise obtained automatically from the Windows "ComputerName" property, or through the Agentless Management Service (AMS), which is a lightweight service that collects OS-based information and provides it to iLO.
Device type/model	Example: HW / HP Next Generation ProLiant DL380 server

Hover your mouse over a device to display summary information. Click on a summary to view details. For a device whose registration is complete, click on the device to go to its individual screen.

To simplify what you see in the All devices view, you can create child groups (see [Create a new child device group](#)), put devices into those child groups, then remove the devices from your default device group (using **Manage device groups** > **Edit device groups** and selecting your default device group). Then only groups, consisting of child groups and groups shared with you by other users, will appear in this view.

Your default device group

When you first sign in, Insight Online creates a default device group named according to the information you provided in your HP Passport account profile, in the form:

first name + last name + "Devices"

For example, Marie Curie's default device group is: Marie Curie Devices. Each user has only one default device group. Your default device group contains:

- Devices recognized as being associated with your HP Passport ID, registered through either central or direct connect methods, that you have not moved into a child device group.
- Devices you add manually that you have not put into a child device group.
- Second-level child device groups you create.

Every device group is associated with a user group. You are the only user in the user group associated with your default device group, and you cannot add users to it. To give other users the administrator role, or any other role, for your default device group, create another user group or use an existing user group, assign roles to it, and associate it with your default device group. To do so, click on **Manage device groups** then **Edit device group** in the Actions drop-down menu at the far right, and follow the procedure.

Your default device group does not appear by name in the **All devices** view, because the view is displaying (among other things, as listed above), the *contents* of your default device group. To see your default device group, click on **Manage device groups** in the Actions drop-down menu. From there you perform such functions as adding and removing devices, adding and deleting child device groups, and updating the contract and warranty status of the devices in the group.

In the **All devices** view, you cannot distinguish child groups created by you from groups shared with you by others. Look at **Manage device groups** when you need to make this distinction. In **Manage device groups**, child groups created by you appear *under* your default device group. They are indented. For example, [Child device group in your All devices view](#) shows a child device group. In Manage device

groups, your child device groups are indented. [Child device groups are indented](#) shows a child group created by you, because it is indented under your default device group.

Figure 3.9 Child device group in your All devices view

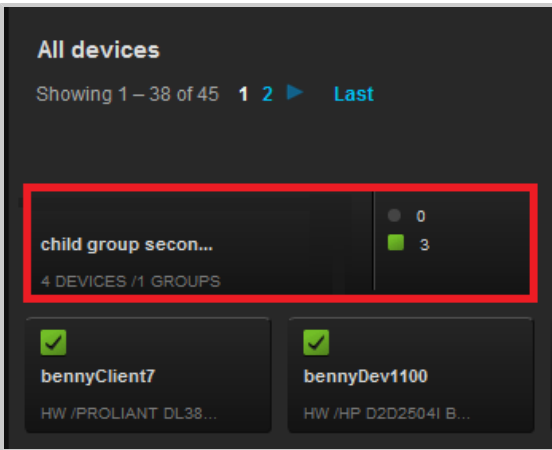


Figure 3.10 Child device groups are indented

Device groups ⓘ	Description
DP12.1_UATUser1 Devices	Created by the system to manage devices.
child group second level	
child group third level	

Groups shared with you by other users on the other hand appear in **Manage device groups at the same level** as your default device group. That is, they appear at the top level, not indented ([In Manage device groups, device groups shared with you are not indented](#)). This does not necessarily mean they are top-level groups in the environment of the user who shared them with you. A group shared with you could be a child (second level) or bottom (third level) group in the environment of the original user, and it will still appear at the same level as your default device group. If another user shares two or three levels of groups with you, the topmost shared group appears at the same level as your default device group.

Figure 3.11 Device groups shared with you are not indented

Device groups ⓘ	Description
test_lily20 Devices	Created by the system to manage devices.
jerons create DG	jerons create DG
message viewer - change status	
test_lily21 Devices	Created by the system to manage devices.
test_lily28 Devices	Created by the system to manage devices.

Sharing a device group does not share its child groups. Child groups must be explicitly shared to make them visible and accessible. This means that if another user shares a device group with you but not its


child groups, you will not be able to see child groups under that device group, even if you are an administrator. This can cause side effects such as in device and group counts, and in a possible inability to delete a device group. If that happens contact the other administrators of the device group you are trying to delete. The administrators are listed in **Manage Device groups** in the **Device group administrators** column. See [Create, maintain, and delete device groups](#) for more information.

You can rename any device group, but you should be careful about renaming your default device group, especially in a complex environment with many users and shared device groups, because the name is the only indication that it is your default device group.

Refresh devices

Device groups shared with you, devices, device properties, and contract and warranty information may all be added, removed or modified outside Insight Online while you are signed in. Batch processes that finish can change device counts and the content of device listings. Click on the refresh devices button in the upper right to bring Insight Online's view of these items up to date:

Figure 3.12 Refresh devices

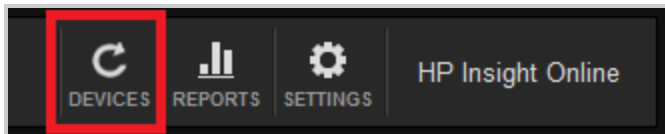

The effect is the same as signing out and signing in again.

Manually added devices


You can add devices manually in Insight Online, using the **Add Device** function, but doing so does not register the devices for remote support. This means that you do not see service events or configuration details for those devices. However, adding devices may still be useful, since it allows you to view contract or warranty details for these devices, and allows you to see all your devices, whether remotely supported or not, in one place.

Devices are always associated with a contract or warranty, even if the contract or warranty has expired. Contracts and warranties associated with remote support devices are automatically linked to the HP Passport ID registered for the device, and are visible in Insight Online. However adding a device in Insight Online manually requires that you first identify the contract or warranty that covers the device, and then link it to your HP Passport ID.

If the device you want to add is not listed in the contracts and warranties that are linked to your HP Passport ID, you must find the contract or warranty that covers the device, add it, and link to it. See [Link contracts and warranties to devices not remotely supported](#) for more information.

Manually added devices display a gray circular icon in the device view, that indicates the device is not registered for remote support. [Remote support and manually added devices](#) shows a remote supported device on the left, and a manually added device on the right.


Figure 3.13 Remote support and manually added devices

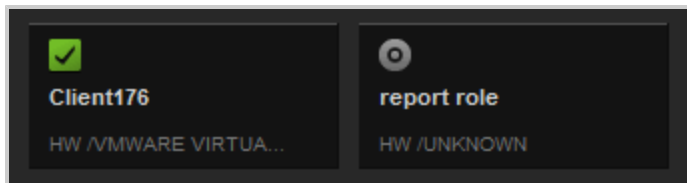

Devices with expired contracts or warranties

Devices whose contract or warranty has expired are still displayed in the devices view, with “Support Expired” displayed:

Figure 3.14 Device whose contract or warranty support has expired

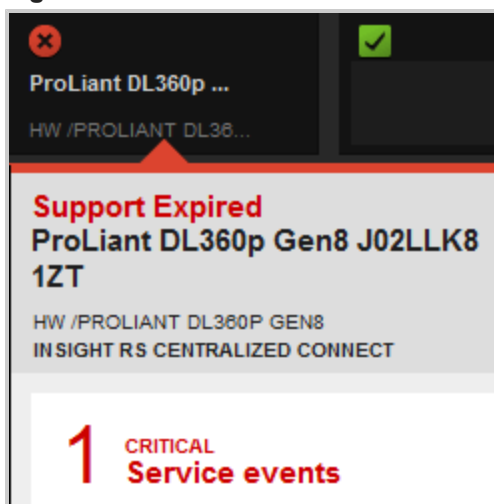

If support coverage for a device has expired, contact your HP Services sales representative or HP Authorized Channel Partner to purchase continued support coverage.


Deleting devices

The result of deleting a device ([Delete device in the Actions drop-down menu](#)) from Insight Online depends on the type of device and connection method:

- You can delete manually added devices entirely.
- You cannot delete central connect devices in Insight Online. The menu option is available but disabled. To delete such a device, use the Insight RS console. Select the device in the Device Summary tab, then select **Actions > Delete selected**.
- You can delete direct connect devices, but note that this is not a true delete or unregister; it only removes the device from the Insight Online view of devices. To delete such a device, go to the device management user interface where the device was originally registered (iLO, Intelligent Provisioning, OA) and disable or delete the device there. Delete the device from Insight Online only as a last resort, if the device remains in the view even after you have disabled or deleted the device as described.

See the *HP Insight Remote Support and Insight Online Setup Guide for ProLiant Gen8 Servers and BladeSystem c-Class Enclosures* (<http://www.hp.com/go/insightremotesupport/docs>) for more information about deleting central connect and direct connect devices.

Figure 3.15 Delete device in the Actions drop-down menu

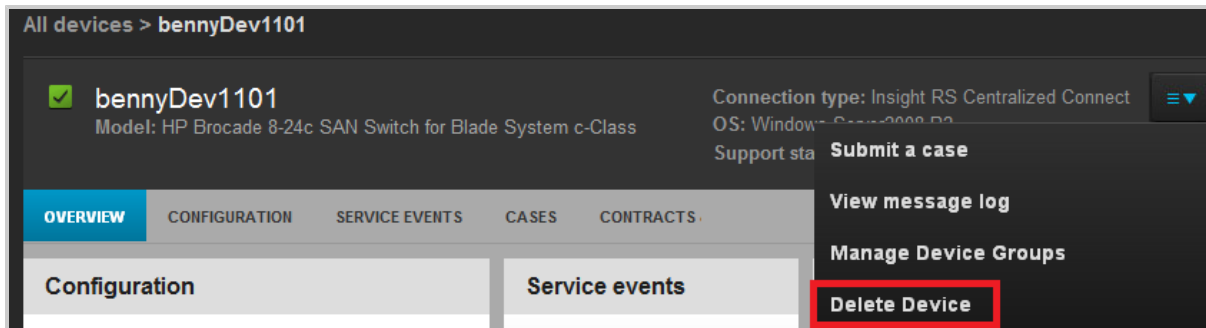


Create, maintain, and delete device groups

Device groups let you arrange your devices into logical groupings to make managing your environment easier. Put devices that you want to manage in the same way into a group. You can then manage the group as a whole rather than managing each individual device.

Device groups you create in Insight Online are *child* device groups within your default device group. The default device group is created when you first sign in, and is associated with a default user group containing only yourself.

Click on **Create new child device group** under **Manage device groups**:

Figure 3.16 Create a new child device group

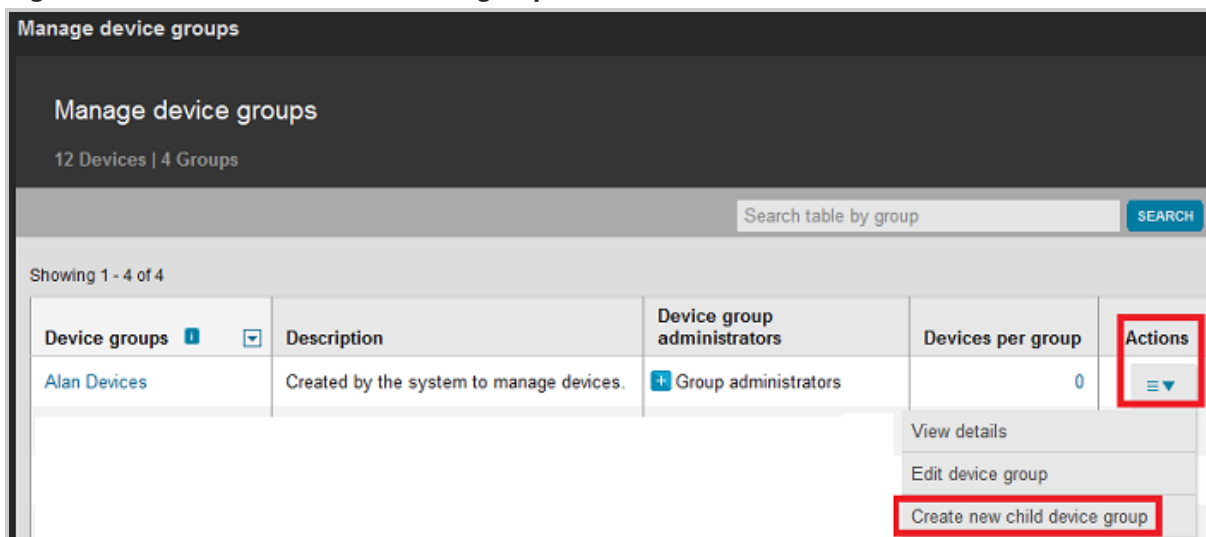

When you create a child device group, you must associate it with at least one user group. Your own HP Passport ID is in the default user group, which is always listed, so you can add that first, and add other user groups later. In this way you can construct a meaningful set of child device groups, and add user groups to them afterwards.

All devices are in your default device group to begin with. Devices must be in at least one device group, and can be in more than one device group. For example, you can create a child device group based on function, such as *servers*, and another child device group based on location, such as *Houston*, and put the same devices into both groups. You can associate each device group with a different user group.

Devices that you put into a child device group remain in your default device group unless you explicitly remove them. After you put devices into child groups, you can then remove them from your default device group (using **Manage device groups** > **Edit device groups** and selecting your default device group), to simplify what you see in the top-level All devices view.

Device groups can be nested two levels downward. That is, your top-level or default device group can contain child groups, which in turn can contain child groups.

If you have more than sixty devices in a device group, HP recommends that you move the devices into child groups. This is just a guideline, to make the management of your devices easier and improve the performance of the device page.

When other users share device groups with you, you see those groups in your All devices view.

To create new child device group, complete the following steps:

1. Click on **Manage device groups** in the Actions drop-down menu.
2. Click on **Create new child device group** in the Actions drop-down menu at the far right of your default device group, or of a second-level child device group.
3. Provide a group name and add devices:

Figure 3.17 Provide a child device group name

4. Verify the derived contracts and warranties associated with the device group.
5. Associate a group of users with the device group.
6. Assign feature service roles to the members of the user group.

Insight Online creates a *derived* contract and warranty *share* (described in [Share contracts and warranties](#)) automatically when you create a device group.

You can edit a device group that you have created or that has been shared with you as an administrator at any time. From **Manage device groups** select **Edit device group** from the Actions drop-down menu at the far right of the line containing the device group you want to change. You can perform these actions:

- Change the group name and description.
- Add or remove devices in the group.
- View contracts and warranties linked to your HP Passport account that are associated with the devices in the group.
- Add or remove user groups associated with the device group.
- View the administrators and members of user groups.
- View or change the roles granted to user groups associated with the device group.

If you are a device group administrator, **Delete device group** is listed in the Actions drop-down menu of the group ([Delete device group](#)). You must remove all devices and delete all child device groups from a device group before you can delete it.

Figure 3.18 Delete device group

The screenshot shows the 'Manage device groups' page with a search bar and a table of device groups. The table has the following columns: 'Device groups' (with a dropdown arrow), 'Description', 'Device group administrators', 'Devices per group', and 'Actions' (with a dropdown arrow). The first row shows group 107 with 1 device. The 'Actions' dropdown for group 107 is open, showing options: 'View details', 'Edit device group', 'Run contract and warranty update', and 'Delete device group' (which is highlighted with a red box).

Device groups	Description	Device group administrators	Devices per group	Actions
107		+ Group administrators	1	- View details - Edit device group - Run contract and warranty update Delete device group
113		+ Group administrators		
115		+ Group administrators		
120		+ Group administrators		

Note that it is possible for a device group to contain child groups that you cannot see, if they have not been shared with you. For example:

- You have shared a device group with another user and that user has created a child group within that group and not shared it with you.
- Another user has shared a device group with you and that user has created a child group within the shared group and not shared it with you. (Sharing a group does not automatically share child groups within it.)

In these scenarios you will not be able to delete the device group. You must contact the other administrators of the device group. Though you cannot see an unshared child group or know exactly who the creator is, the creator will be one of the administrators of the device group, since only an administrator could have created a child group. The email addresses of the administrators are listed in **Manage Device groups** in the **Device group administrators** column. Contact the administrators in the list to find out which of them created the child group, and ask the creator to share the child group with you or to delete it.

Roles and administrator types

During the process of creating a device group you can specify existing user groups, or create and populate new user groups, with whom to share that device group.

Feature service *roles* are permissions granted to users of a user group. When you create a device group, you associate one or more user groups to it, and assign roles to those user groups.

There are three types of administrator, and it is important to be aware of the distinction. They do not overlap:

Administrator type	Description
User group administrator	• Add and remove users • Assign administrator and member privileges to users • Delete the user group User group administrator and member privileges are unrelated to feature service roles.
Device group administrator	• Assign roles to one or more user groups • Modify roles assigned to user groups • Create child device groups • Add, edit, and remove devices from the device group • Delete the device group • Delete devices You have device group administrator privilege for any child device group you create. All administrators of a device group have equal privileges.
Contract and warranty share administrator	• Add or remove contracts and warranties • Associate additional user groups with the share • Assign share roles to the user groups • Modify share roles assigned to user groups

After specifying user groups, for each user group you then enable or disable roles that represent access to feature services. [Assign feature service roles to a user group](#) shows the assignment of roles to a user group, in the context of a particular device group.

Figure 3.19 Assign feature service roles to a user group

1. GROUP NAME / DEVICES 2. DERIVED CONTRACTS & WARRANTIES 3. USERS **4. ROLES**

Expand a user group to assign roles to the group. ⓘ

* = Required field

Showing 1 - 1 of 1

User groups	Description
PFG Operator User Group Test	

Assign* Select All	Roles and feature services	Description
☒	Device group administrator	Allows full control of a device group and the contained me
☒	Device group member	Allows read access to a device group and contained mem
☒	Service Credits	View: 1) Proactive Service Credits purchased on your HP exchanged for those credits, and 3) the HP Proactive Sele
☒	Service events	Access to service events (requires remote support devices
☒	Reports	Access to reports (requires user to have remote support d
☒	Support Case Manager (SCM)	Submit and manage support cases for products with a val
☒	Patch management	Complete patch support for operating systems. Run a pat and sets.

Feature service roles are associated with a user group only in the context of a specific device group or contract and warranty share. This means that the same user group can have different roles assigned to it in different contexts. For example, in [Assign feature service roles to a user group](#) the device group creator has associated the “PFG Operator User Group Test” user group with the device group, and is assigning several feature roles to it. A contract and warranty share administrator meanwhile could associate this same user group with a contract and warranty share, and assign different feature service roles to it.

Roles assigned to a user group are group-wide. That is, they apply equally to both administrators and members of the user group. In this example both administrators and members of the user group “PFG Operator User Group Test” become device group administrators, since it is checked off.

The same mechanism is used when creating contract and warranty shares. See [Roles are assigned group-wide](#) for examples.

User groups you create during the process of creating a device group are also available to associate with other device groups, or with contract and warranty shares.

You can associate more than one user group with the same device group or contract and warranty share. Do this if you want to assign different roles to different groups of users. Roles and feature services are grayed out if no contract or warranty exists that allows them. Purchasing a contract or warranty will activate the ability to assign these roles and feature services to the user group.

You cannot delete a user group if it is the only user group that has administrator role for a device group or for a contract and warranty share.


Chapter 4: Reports and messages

Reports

The reporting feature lets you easily generate reports, save them for reuse, and view a log of prior results, allowing you to manage your reports efficiently. Reports are available to users and to HP Authorized Channel Partners. You can generate reports for the following:

- HP Care Packs only
- Support agreements only (use the Contracts report)
- HP Care Packs, support agreements, and warranties (use the Contracts and warranties report)
- Device configuration
- Firmware
- Service events
- Support cases

See the *HP Insight Online Reporting Guide* (www.hp.com/support/InsightOnline_RG_en) for details.

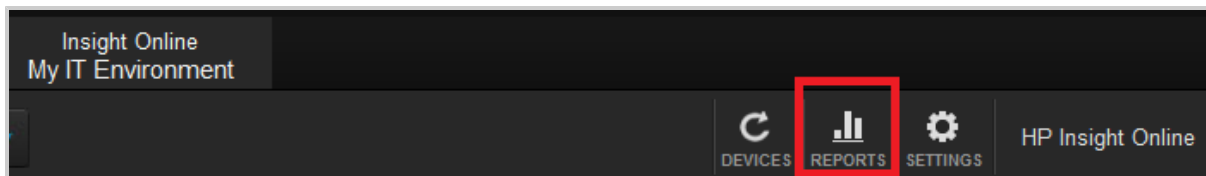

Message log

The message log is a list of messages about direct connect devices that are registered to your HP Passport ID or that are in device groups shared with you. The messages contain information about issues such as monitoring, registration and connection problems, and overdue communications. The log can also contain messages about the status of batch processes submitted for completion of device registration, and the update of service information.


Each message in the log contains fields for time generated, message type, device name and description. By default the listing is sorted by Coordinated Universal Time (UTC) time generated, not converted to the time zone specified in your profile. Click on the other column heads to sort by those fields. Select a message type from the **View** drop-down menu at the top to display messages of a particular type. Click on the description field to display the individual message, or hover over the field to see the first 290 characters of the description.

In an individual message, click on the device name to go to the overview for that device.

Access the message log from various locations. Click on the **View message log** item on these pages:

- The Dashboard's Actions drop-down menu ([View message log from the Dashboard](#)).
- The Devices feature's top-level view (in the Actions drop-down menu).

- An individual device group page (in the Actions drop-down menu at the far right).
- An individual device page (in the Actions drop-down menu at the far right).

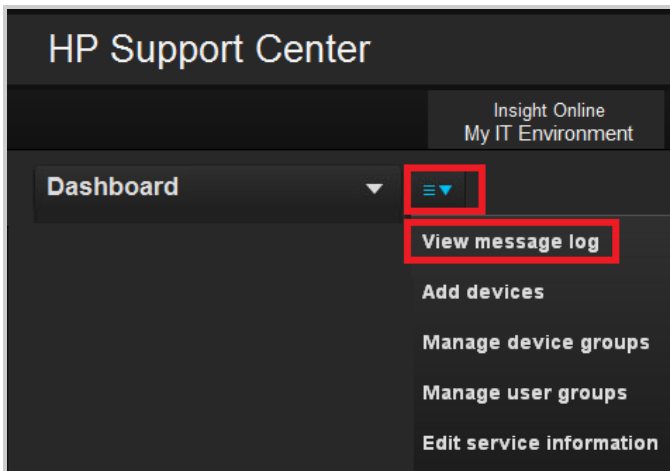Figure 4.1 View message log from the Dashboard

The messages that display ([Message log sample](#)) depend on where you access the log. From the Dashboard or the Devices top level, messages for all devices are listed. From a device group page, only messages for devices in the group are listed. From an individual device page, only messages for that device are listed.

Figure 4.2 Message log sample

Message log			
Message log messages			
			VIEW All
Showing 1 – 9 of 9			
Time generated (UTC)	Message type	Identifier	Message description
Jun 24, 2013 05:06:54 AM	Overdue communication	P0G_DC!thy_4.fc.hp.com	Device has not successfully sent a configuration collecti..
Jun 24, 2013 05:04:27 AM	Overdue communication	P0G_DC_2.fc.hp.com	Device has not successfully sent a configuration collecti..

Messages are for remotely supported devices only, not manually added devices.

Chapter 5: Service Credits

Overview


The Service Credits feature provides access to:

- Service Credits purchased on HP support agreements.
- The HP services exchanged for those credits.
- Additional HP services available for exchange of Service Credits.
- For authorized users, the ability to purchase HP services using a shopping cart.

To access Service Credits, you must have a proactive services support agreement in your HP Passport profile.

From the Insight Online My IT Environment tab, select **Service Credits** from the main menu ([Select Service Credits from the main menu](#)) to reach the Service Credits home page.

Figure 5.1 *Select Service Credits from the main menu*

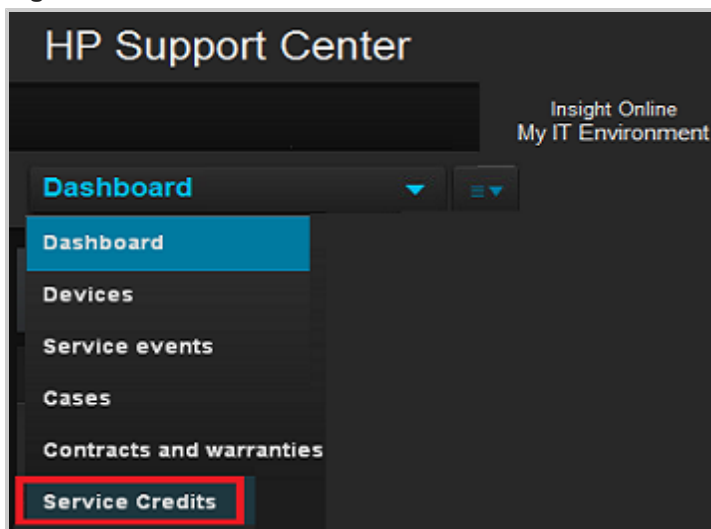

The **Service Credits home** page provides a summary of your Service Credit information ([Service Credits home](#)). Click on any of the section headings, or use the Actions drop-down menu ([Service Credits Actions drop-down menu](#)) to see detailed information. You can print the displayed results from any page.

Figure 5.2 Service Credits home

Service Credits

285.0 available Service Credits | 0.0 expiring within 45 days

My Service Credits
Summary of your active Service Credits

285.0	AVAILABLE Service Credits
713.0	Service Credits used
998.0	Total Service Credits
0.0	Expiring within 45 days
0.0	Expiring within 46 to 90 days

My services
Summary of HP services purchased using your Service Credits

20	TOTAL Services
2	Delivered
3	Scheduled
15	Unscheduled

[Schedule services](#)

Shop HP services using Service Credits
Select a category to view proactive services to purchase using Service Credits:

- All (153)
- Custom (3)
- Environment (38)
- Network (3)
- Server & OS (26)
- Software (32)
- Storage (37)

Featured resources

- HP Proactive Care Services**
Geared for more complex IT environments; includes additional proactive component services, as well as reactive support.
- Datacenter Care Services**
Flexible and highly-customizable; features high-touch service, single point of accountability and support for HP and multivendor systems.

Figure 5.3 Service Credits Actions drop-down menu

Insight Online
My IT Environment

Service Credits

- Service Credits home
- My Service Credits
- My services
- My orders
- Shop HP services
- Help
- Related Links
- HP Proactive Care Services
- Datacenter Care Services

The items in the Actions drop-down menu are described beginning in [My Service Credits](#).


Administrator and member roles

Two types of roles are associated with Service Credits:

- *Administrators* will see a shopping cart in the upper right of the Service Credits pages, and can use **Shop HP services** to purchase more services by adding them to the cart ([Service Credits shopping cart](#)).
- *Members* can view **My Service Credits** and **My services**, and access featured HP services.

Administrator and member roles exist in the context of a *contract and warranty share*. To access Service Credits, the contract and warranty share must contain at least one service support agreement, and include a user group that includes your HP Passport ID, with the administrator or member role enabled for Service Credits. This is the same mechanism used for granting access to other features of the HP Support Center. See [Share contracts and warranties](#) for more information.

Figure 5.4 Service Credits shopping cart

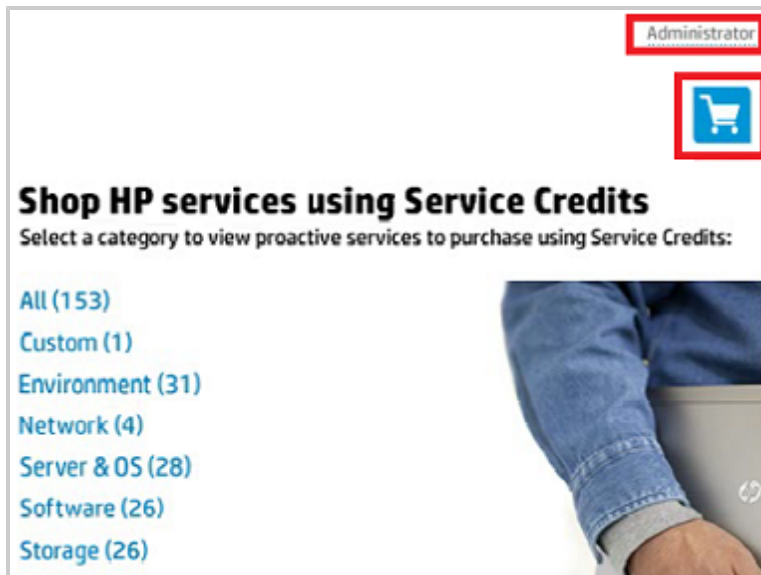

My Service Credits

The **My Service Credits** page displays Service Credits against all your active and expired support agreements. These agreements are either linked to your HP Passport ID or shared with you by another user who granted you access as described in [Roles and administrator types](#). Support agreements that expired within the past two years are included.

The displayed list shows Service Credits by Support agreement, which can include a *Service Agreement ID* (SAID) or a *Support Account Reference* (SAR). If you have no currently active Service Credits, you can use the **View** filter to see expired or all Service Credits instead. You can filter by status or search using the drop-down and search box at the top. Click on an SAID or SAR to go to a page showing the details of the specific agreement in the Contracts & Warranties area. Click on an individual Service Credit item to see details. Sort the results by any column by clicking on the column head.

My services

The **My services** page displays HP services purchased using Service Credits from active and expired support agreements. These agreements are either linked to your HP Passport ID or shared with you by

another user. Support agreements that expired within the past two years are included.

Click on a service activity name in the list to go to the service overview page in **Shop HP services**. By default, the list is sorted by status. Filter the results by status using the **View** drop-down menu. Sort the results by any column by clicking on the column head. Click on the contextual help icon next to the service name to see a brief description of the service.

For each order listed under a single service, use the Actions drop-down menu at the far right of the row to go to the details page which shows the status of all purchased instances of the service. The details page also provides additional functions which vary depending on the current status of the service and your role. They include:

- *E-mail HP*. Use this form to request that an HP services representative contact you to discuss your business needs. The HP representative will contact you within three HP business days of submitting the request. Provide details and contact information in the form.
- *Schedule service*. Schedule and unschedule services in the list using the Actions drop-down menu at the far right. After you make the change, the status and dates for that service will be updated in the list.
- *Reschedule service*. Change the date of the service. When rescheduling, HP will review the request within three HP business days and either confirm or will email you proposing an alternate date and time.
- *Remove scheduled date*. Revert a service to the unscheduled status.
- *Cancel service*. If you cancel a service, the Service Credits associated with that service are refunded to the support agreement that has the furthest expiration date, up to what it contributed to the original order. Cancellation information is appended to the original order in **My orders**. Service Credits cannot be refunded to a support agreement where those Service Credits have since expired.

My orders

The **My orders** page displays your orders purchased using Service Credits. The list displays the service activity within the order, as well as other details. You can filter the list, sort it by column head, and search for orders. Use the Actions drop-down menu on the far right of each row to view details. If you are an administrator, the menu includes a link to reorder services. Click on an order in the list to see order details.

Shop HP services

Service Credits administrators can click on any of the service category links on the right of the **Service Credits** home page, or on **Shop HP services** in the Actions drop-down menu, to reach **Shop HP services**:

Figure 5.5 Shop HP services

Service Credits 201.65 available Service Credits | 0.0 expiring within 45 days

Search HP services

View All All Go Search HP services Search

1. Choose category 2. Choose subcategory (Category, Subcategory or Service activity) Print

Choose from a variety of HP services covering IT technology categories including environment, network, server & OS, software and storage. Click on the "Service activity" to see more information.

1 - 25 of 153 items First < 1 2 3 4 5 > Last View all

Category	Subcategory	Service activity	Price in Service Credits	
			During standard HP business hours	After HP business hours
Custom	Custom	Custom Deliverable - Account Support Manager	Upon request	Upon request
Custom	Custom	Custom Deliverable - Technical Consultant	Upon request	Upon request

You can choose a variety of HP services from the list. Filter the list using the category and subcategory drop-down menus, and sort the results by category, subcategory and service activity. You can also search for HP services using the search text box.

Click on a service activity in the list to see an overview. This displays a price, in Service Credits, for the service, and boxes for you to enter the quantity of the service, to add to your cart. Some activities have prerequisites. If so, click on the **Prerequisites** tab, and purchase them in the same way.

If you have support agreements spanning more than one country you will be asked, only once, to specify the country for the HP service. Select the country from the drop-down menu.

The cart may indicate that you need to make changes to your services. If so make the necessary changes then proceed. Before submitting your order you can review the order and specify which Service Credits you want to use. By default the checkout process assigns Service Credits to pay for cart contents by expiration date, with those scheduled to expire first being used first. You can change this before submitting the order, by using the **Service Credits to use** field in the right column.

Review the information, check the box indicating you have understood and accepted the scope of the services as described, and submit. When checkout completes successfully, an order number is displayed, and confirmation is emailed to you.

View the current contents of the cart at any time by clicking on the cart.

You can request a custom service activity. Provide details of your request, your contact information, the support agreement containing the Service Credits you wish to use, and submit the form. An HP representative will contact you within three HP business days.

You can also provide feedback using the feedback form.

Chapter 6: HP Authorized Channel Partners

Overview

If you have enabled an HP Authorized Channel Partner to view your remote support devices, that partner can do so by using the **My Customers** section in Insight Online. This section is only visible to those who are recognized as an HP Authorized Channel Partner at sign in.

Types of HP Authorized Channel Partners

There are two types of HP Authorized Channel Partner:

- **HP Authorized Reseller.** To become an HP Authorized Reseller, a company must apply to become a partner on the Global Partner Portal (GPP) and meet certain criteria. Once approved, HP will assign the company a partner location ID. Individuals at the partner company can register to become users of the partner portal. During registration, users create an HP Passport ID that is linked to their company's location ID. The same HP Passport ID is used to sign in to Insight Online. Insight Online will identify you as an HP Authorized Reseller.
- **HP Authorized Service Partner.** Upon reaching a level of HP sales, HP offers your company, as an HP Authorized Reseller, training to deliver break-fix service as a ServiceOne partner. If this is of interest, your company can become accredited as an HP Authorized Service Partner. Once HP accredits your company, Insight Online will automatically identify you as an HP Authorized Service Partner at sign in.

If a customer does not assign a channel partner, service delivery defaults to HP. As a Service Delivery Partner, you have the option to have Insight RS cases automatically routed to you.

Enabling access to customer's device information

As an HP Authorized Channel Partner, you must share your partner location ID with your customers and ask them to associate it with the devices they want you to manage. To allow you to view configuration information for their devices, you must also ask them to optimize their IT environment.

For central connect devices, customers should use the Insight RS Hosting Device Setup Wizard:

- On the **Receiving Remote Support** screen, check "Consent to have HP or my HP Authorized Channel Partner contact me to discuss optimizing my IT environment". Checking this option will affect all devices managed by Insight RS. Only you as the HP Authorized Channel Partner will be able to receive configuration information, and not HP. HP will not contact your customers if you are the registered partner in Insight RS and Insight Online.
- On the **HP Authorized Channel Partners** screen, click the Partner ID option and enter the partner location ID.

For direct connect devices, customers should use Insight Online. The information can be added in three places:

- At Step 3 of the **Complete device registration** sequence. For one or more devices. See [Customer provides partner location ID and optimizes IT environment](#).
- After registration, using **Edit Service Information** from the Actions drop-down menu. For one or more devices. See [Edit service information](#).
- For an individual device, from the **Edit** link on the **Configuration** tab of the device's details page. See [Change partner and contact information on an individual device](#).

Enter the partner location ID and check **Optimize my IT environment**. Note that for direct connect devices this action only applies to the specific devices you select.

Figure 6.1 *Customer provides partner location ID and optimizes IT environment*

Complete device registration

1. SELECT TARGET DEVICES 2. PROVIDE SITE AND SUPPORT INFORMATION **3. PROVIDE HP AUTHORIZED CHANNEL PARTNER INFORMATION**

Step 3: Provide HP Authorized Channel Partner information

The form below allows you to assign an HP Authorized Channel Partner for one or more Insight Remote Support Direct Connect devices. Use the [Partner location ID](#) numbers below. Use the "Check ID" buttons to validate your entry. Select "Hewlett-Packard" if all of your products are delivered by Hewlett-Packard.

* = Required field

HP Authorized Service Partner* ⓘ

☐ Hewlett-Packard

☒ Partner location ID

HP Authorized Reseller/Distributor* ⓘ

☐ Hewlett-Packard

☒ Partner location ID

☒ **Optimize my IT environment** ⓘ

I consent to having HP or my HP Authorized Reseller/Distributor contact me to discuss optimizing my IT environment.

The My Customers view


For you as an HP Authorized Channel Partner, the default active tab in Insight Online depends on where you sign in:

- From the HP Support Center using your HP Passport ID: You are recognized as an HP Authorized Channel Partner. Your default tab is **My IT Environment**, the same as for a customer. Use that to manage your own devices as a standard user. The **My Customers** tab is also active. Click on it to manage your customer's devices.
- From a link in a partner portal such as the Global Partner Portal (GPP) or Channel Services Network (CSN): You do not have to sign in again with your HP Passport ID. Your default tab is **My Customers**. The **My IT Environment** tab is also active. Click on it to manage your own devices.

The Partner Portal button in the **My Customers** tab links to partner information about Insight Online and Insight RS.

Customers do not see the **My Customers** tab. It is only visible as a result of the two scenarios above. The top-level content of this tab contains customer objects, rather than devices and device groups:

Figure 6.2 *My Customers shows customers, not devices*

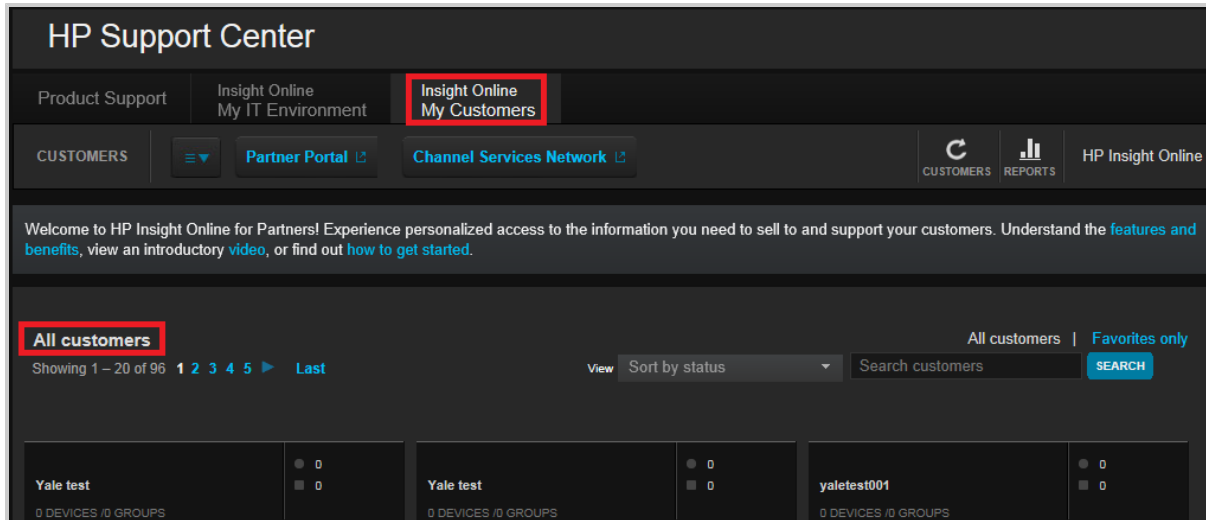

Click on a customer object to see the customer's devices. As a partner you can only see those devices that have been associated by the customer with your partner location ID as described in [Enabling access to customer's device information](#). Some differences exist in this view, depending on the type of channel partner:

Table 6.1 Customer information available to HP Channel Partners


Insight Online feature		HP Authorized Reseller	HP Authorized Service Partner	Customer opt in required
Devices and solutions:				
	Configuration details	x	x	x
	Service levels	x	x	x (Reseller only)
Reports:				
	Device configuration	x	x	x
	Contracts and warranties	x	x	
	Support case		x	
	Service event		x	
	Firmware		x	
Service events:				
	Details		x	
	Icons in dashboard		x	
	Link to Channel Services Network (CSN)		x	

For direct connect devices, the device owner can change the partner location ID at any time, either individually or by group. See [Edit service information](#). See also the *HP Insight Online FAQs* (<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-9252ENW>) for more information.

Favorite customers


In the Customers view, you can designate a customer "favorite" by hovering over a customer object and clicking "Add as favorite".

Figure 6.3 Add a favorite customer

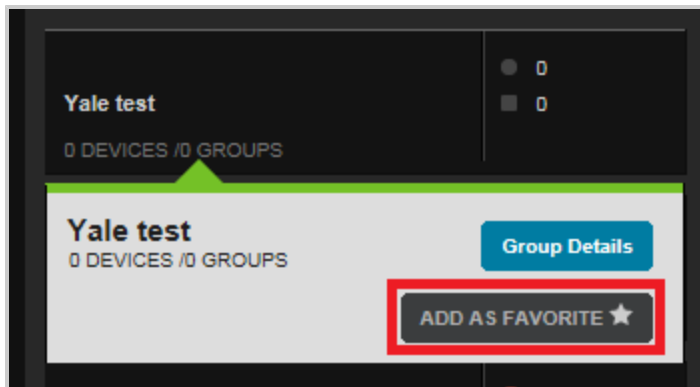

A star is then added to the customer object. Selecting at least one favorite customer activates the "Favorites only" filter on the right.

Figure 6.4 Favorite customers

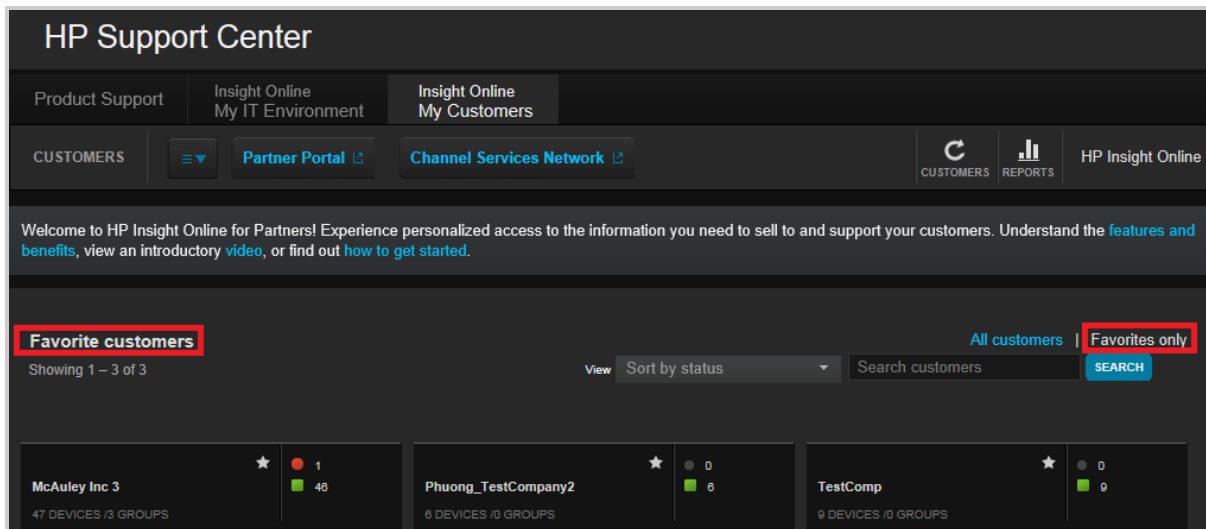

You can select a maximum of 25 favorites.

Initially, all customers are displayed by default. Click on "Favorites only" to display favorite customers, and "All customers" to change back. This choice remains your default customer view until you change it.

The View filters and the Search action will apply to the set of customers you are viewing—either all customers or favorites only.

You can hover over a favorite customer object and remove it from your favorites. If you remove all favorites, the "Favorites only" filter is deactivated.

Service levels

HP Authorized Channel Partners can use the Service levels feature to view information about the highest service level (such as an HP warranty, support agreement or an HP Care Pack) available that applies to each device that is monitored by HP remote support. For HP Authorized Resellers to see service level

information, customers must opt in from Insight RS for central connect devices, or from Insight Online for direct connect devices.

From the details screen of a device, click the Service levels area on the right. The service levels details screen displays. Check the "Include all active service levels" to show both the highest service level (an HP Care Pack, for example) and other applicable service levels as well (a warranty, for example).

Figure 6.5 The Service level details of a device

VIEW

All

☐ Include all active service levels

Highest service levels

Search service levels

SEARCH

(Device name, serial number or support type)

Showing 1 – 25 of 49 1 2

Last

 |

View all

Device name	Model	Serial number	Service level	Status	Expiration date (UTC)	Support type
3gigitest1	3Product Model	GB12345678901234	Warranty Coverage days: 5 Coverage hours: Days1to5 STD; Response time: Days1to5 STD;	Active	Dec 15, 2015	Base Warranty

Removing customer groups from the view

As a partner you may need to remove a customer group from your All customers view if there are no longer devices associated with this customer. Duplicate customer groups may be created over time, or your relationship with the customer may have changed. Since a customer group is like a device group, removing a customer group is like removing a device group. You remove the customer group from **Manage device groups**. To remove a customer group, two conditions must first be met:

- No devices must appear in the customer group. For zero devices to appear in the customer group, the customer must do one or more of the following, depending on the kind of devices in their environment:
 - Disable their connection to Insight Online from the Insight RS console (**Administrator Settings > HP Insight Online** tab) that contains the devices managed by the partner.
 - Or, delete all central connect devices from the Insight RS instance that contains the devices managed by the partner.
 - Remove all direct connect devices from their Insight Online My IT Environment by using the Insight RS console (preferred), or by using the Insight Online **Delete device** function.
 - Or, change the partner location ID for all devices managed by the partner. The partner location ID of direct connect devices can be changed in Insight Online using **Edit service information** ([Edit service information](#)), and of central connect devices in the Insight RS console in the **Company Information > Channel partners** screen.
- Child device groups that you, or any other partner administrator, have created within the customer group must be removed. Child groups created by the customer do not matter, since you as a partner do not see them.

Once there are zero devices and zero child groups remaining in the customer group, you can remove the customer group from different paths:

- From the **All customers** view, navigate to the **Dashboard** of the customer group:
 - Hover over the customer group and click on **Group details**
 - Or:
 - Click on the customer group and click on **Group details**
 - Or:
 - Click on the customer group, then select **Dashboard** from the main menu.
 - Once in the **Dashboard**, click on **Manage device groups** in the Actions drop-down menu.
 - In the device groups listing, on the line of the customer group you want to remove, click on the Actions drop-down menu at the far right, then click on **Delete customer group**:

Figure 6.6 Delete customer group

The screenshot shows the 'Manage device groups' interface. At the top, it says '1 Devices | 1 Groups'. Below this is a search bar with the text 'Search table by group' and a 'SEARCH' button. The table below shows 'Showing 1 - 1 of 1' results. The table has five columns: 'Device groups', 'Description', 'Device group administrators', 'Devices per group', and 'Actions'. The first row shows a device group named 'HP MTP SR22' with a description 'Contains all devices registered by HP MTP SR22 and shared with HP Insight Online Company'. The 'Device group administrators' column shows '+ Group administrators'. The 'Devices per group' column shows '1'. The 'Actions' column has a dropdown menu with options: 'View details', 'Edit device group', 'Create new child device group', and 'Delete customer group'. The 'Delete customer group' option is highlighted with a red box.

Device groups	Description	Device group administrators	Devices per group	Actions
HP MTP SR22	Contains all devices registered by HP MTP SR22 and shared with HP Insight Online Company	+ Group administrators	1	View details Edit device group Create new child device group Delete customer group

It is possible for another partner administrator with access to the same customer group to create a child device group within it. If that child group is not shared with you, you will not be able to delete the customer group. You must contact the other administrators of the customer group. Though you cannot see an unshared child device group or know exactly who the creator is, the creator will be one of the administrators of the customer group you are trying to delete, since only an administrator could have created the child device group. You can see who these administrators are in **Manage Device groups** in the **Device group administrators** column. Contact the administrators in the list to find out which of them created the child group, and ask the creator to share the child group with you or to delete it.

Chapter 7: Manage contracts and warranties

Contracts and warranties include support agreements, HP Care Packs, and warranties. Contracts and warranties are managed through HP's *Support Agreement Manager* (<http://www.esca.hp.com>) website. This means that a contract or warranty already exists for any remote support device.

If you sign in to Insight Online using the same HP Passport ID used to register the device (see [Complete direct connect device registration](#)), you do not have to link your ID to the contracts and warranties that cover the remote support devices; they are linked to your ID automatically and appear as a *derived* contract and warranty share. See [Derived contracts and warranties](#).

Since contracts and warranties are associated with the devices they cover, the link between your HP Passport ID and a contract or warranty provides access to information about the devices covered by the contract or warranty. This information is available to you from the Insight Online devices area.

Derived contracts and warranties

In your list of contract and warranty shares, some are *derived* by Insight Online. Derived means that Insight Online determines the contracts and warranties that are associated with a given group of devices, and automatically creates a contract and warranty share containing those contracts and warranties. This occurs for:

- Your default device group.
- A child device group you create.
- A device group you are an administrator of.


Derived contract and warranty shares are marked by a red asterisk. The name of the contract and warranty share is the same as the name of the corresponding device group. You can view the details of these derived contract and warranty shares but unlike a contract and warranty share that you create yourself, you cannot edit them:

Figure 7.1 View details of a derived contract and warranty share

Manage contract & warranty shares				
CREATE NEW SHARE				
[*] Created by the system to contain contracts and warranties for the device group of the same name.				
Showing 1 - 5 of 5				
Contract & warranty shares	Description	Contract & warranty share administrators	Contracts & warranties	Actions
* Alan Devices		+ Group administrators	0	⌵
View details				

However, you can update the derived contract and warranty share from **Manage device groups** in the device group area, by selecting **Run contract and warranty update** in the Actions drop-down menu of the corresponding device group:

Figure 7.2 Run contract and warranty update

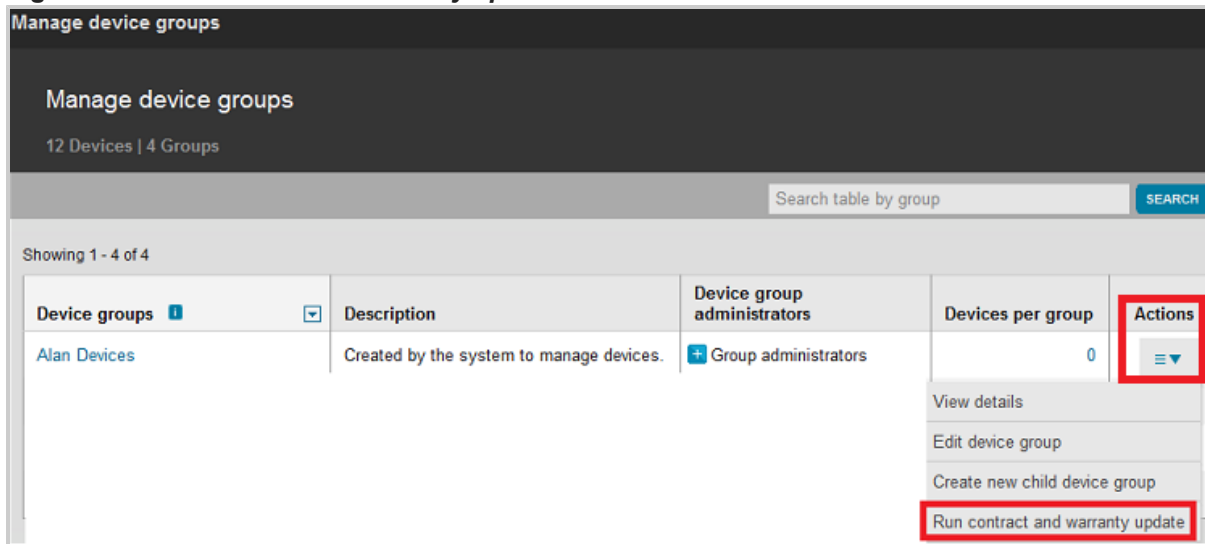

Link contracts and warranties

To enable devices to be registered for remote support in Insight Online, you must link a contract or a warranty that covers those devices to your HP Passport ID. Link contracts and warranties to your HP Passport ID from the **Contracts and warranties** item in the main menu. The procedure is similar for support agreements (shown), HP Care Packs, and warranties.

Figure 7.3 Linking a support agreement, with ownership types

Link support agreements

Link one or more support agreements to your HP Support Center user ID to gain access to entitled features including Support Case Manager, Software Updates and Licensing, Diagnostic passwords, Patch management, and entitled knowledge.

- Note:** Submitting updates may take several minutes.
- By identifying a support agreement, it will be linked (permanently associated) with your user ID, so you will not have to link it again. To view all entitlements linked to your user ID, go to [View linked contracts & warranties](#)

When you link a support agreement you can choose whether you want to retain single control or allow other HP Support Center users to also link to it. If you are the single owner you can share it to groups of other users.

Enter linking information

To link support agreements, enter the HP Service Agreement ID (SAID) numbers and Support Account Reference (SAR) values. Select ownership types. Click Submit.

Link an entitlement:

Single owner You have complete control and can set up shares.	Select ownership type: Single →	You can share You can share the entitlement with any other registered user.
Multiple Anyone can link and all are equal owners.	Select ownership type: Multiple →	Others can link All are equal owners.

* = Required field

HP Service Agreement ID (SAID)*:	Support Account Reference (SAR)*:	Ownership type*: 1
----------------------------------	-----------------------------------	---------------------------

To link to a contract or warranty, you need your HP Passport ID and the following information:

Contract or warranty type	Identifier	Required additional information
Support agreement	Service Agreement ID	Support Account Reference (SAR)
HP Care Pack	HP Care Pack ID	HP Care Pack product number*, country of purchase
Warranty	Warranty serial number	Warranty product number*, country of purchase

The table below lists the location of the required information:

Required information	Where to find
Service Agreement ID	B,C,D
Support Account Reference (SAR)	B,C,D
HP Care Pack ID	B,C
Warranty serial number	A, B, D
HP Care Pack product number*	B, D
Warranty product number*	A, B

- A. On the product itself.
- B. On the support documentation.
- C. At the Electronic Support Contract Assistant website.
- D. On the customer cover letter that describes the contract or warranty.

* The product number(s) of the products covered by the HP Care Pack or warranty

The first person who links an HP contract or warranty becomes the initial owner. As owner you decide the ownership type: *single* or *multiple*. This choice affects the visibility of the contract or warranty. In general it is best practice to select multiple ownership, since this type of support is typically managed by a group, not an individual.

If you try to link a contract or warranty and see an error message stating that the support agreement is already linked to someone else, contact that owner to get access rights. This may be the result of the owner selecting single ownership when creating the link, and not creating a share with a user group that includes you. The owner may not be revealed, if the owner has not shared his or her contact information, so you may have to find the contract administrator on your site to identify the owner. Once identified the owner should change the ownership type for that contract or warranty link from single to multiple, or add you to a share with the necessary privileges.

Share contracts and warranties

After you have linked contracts and warranties to your HP Passport ID, you can then share them with other users. You do this by creating a contract and warranty *share*:

Figure 7.4 *Creating a contract and warranty share*

To create a contract and warranty share, perform the following steps:

1. From **Manage contracts & warranties**, click **Create new share**.
2. Name the share and provide a description.
3. Select one or more existing user groups, or create new ones.
4. Assign roles and feature services to the selected user groups. Assign the administrator role to the first group.

You must assign the first user group you add in Step 4 the role of share administrator, because at least one user group must have that role. Select the "administrator" checkbox. You can change this later, as long as one user group has administrator role.

To add subsequent user groups with the role of member, do not check any boxes, since the member role is the default.

Note: User group privileges are not the same as share roles. If you create a user group to assign to the share you are making, the administrators you assign to the user group do not automatically become administrators of the share. When creating a share, when you select a user group and assign roles to it, those roles apply to all users in the user group equally. You are assigning roles to the group as a whole—it does not matter whether any given user is an administrator or a member of the user group itself.

In the table below for example, two user groups are created, one for share administrators and one for share members. Note that Francis Lee, though a member of the user group, becomes an administrator of the share. Similarly Pradesh Jones and Akiko Yamada, though administrators of the user group, become members of the share:

Table 7.1 Roles are assigned group-wide

User groups and users	User group privilege	Assign role to share	Role in share
"Paris contract share admins"			
- Marie Curie	admin	admin	admin
- Francis Lee	member		admin
"Paris contract share members"			
- Pradesh Jones	admin	member	member
- Akiko Yamada	admin		member

If you want everyone in the user group to have administrator role for the share, you only need one user group.

The table below lists the differences between a share administrator and a share member.

Table 7.2 Share administrators and share members

Task	Share administrator	Share member
Can add to and remove contracts from the share	x	
Can view contracts in the share	x	x
Can add and remove user groups associated with the share	x	
Can change the roles of the user groups associated with the share	x	
Can view administrators of the share	x	x
Can view members of the share	x	

User groups that you create during this process are also available to associate with other contract and warranty shares, and with device groups during the process of creating a device group.

Display your user name and email

Simplify the management of your contracts and warranties by allowing other authenticated and entitled users to see your user name and email address. Select "Yes" to share this information, or "No" to keep it private:

Contracts and warranties ▼

Display your user name and e-mail ⓘ

Choosing 'Yes' will allow other HP Support Center users to see your user name and e-mail address warranty you own.

☐ Yes ☒ No **UPDATE**

The result of this action depends on the ownership type of each contract or warranty:

Table 7.3 *Display your user name and email*


Button value	Result	
	Multiple ownership	Single ownership
	Visibility of your information, from any other user who also links as a multiple owner to that same contract or warranty:	If another user tries to link to that same contract or warranty, that user is directed to contact:
Yes	visible	You, via email, for access.
No	hidden	Their contract or warranty administrator.

You can view and change this setting at any time. Regardless of the selection you make, if you are the single owner of a contract or warranty and you create a share including it, the users in the associated user group, both administrators and members, will be able to see your information as well as the information of the other administrators and members in that user group. In other words visibility among users within a share takes precedence over this setting.

Batch link tool

The Batch link tool allows you to link up to 2500 contracts and warranties to your HP Passport ID in a single operation. If you have more than 2500, you can resubmit as many times as you need to, until all of your contracts and warranties are linked to your account.

From **Contracts and warranties** click on **Batch link tool** either in the Actions drop-down menu or on the page itself.

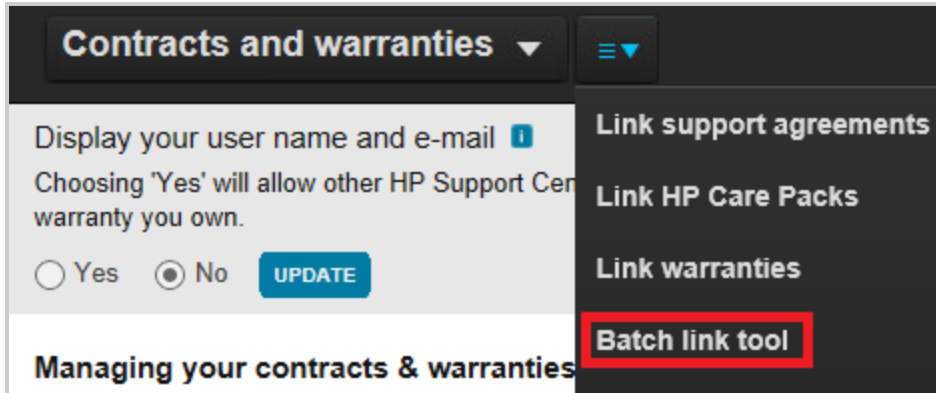

Follow the steps listed on the upload page:

- Download the latest Microsoft Excel template file from the link in Step 1. The format of the template name is "name-date_version", where the date is represented as YYYY-MM-DD.
- Read the detailed instructions in the Readme sheet of the template.
- Enter information, one contract or warranty per line, according to the titles at the top of each column. Enter a maximum of 2500 lines, for each instance of the template you create. Note that some of the fields are optional.
- Do a "Save as", to comma-separated value (CSV) format. (Select **CSV (Comma delimited) (*.csv)** option only from "Save as type" in Excel.) The result is a plain text file containing the entries from the spreadsheet, with each field on each line separated by a comma.
- Optionally, update your user name and e-mail display option. Select "Yes" to allow other users to see your user name and email address when they view these contracts and warranties, or select "No" to keep this information private.
- Check the boxes to verify that you have selected the most recent template, and that you have a CSV file.

- Browse to the CSV file on your local computer, then click Upload.

Batch link tool

Upload batch link file

Batch upload summary

Upload batch link file

To begin the upload process:

1. Download the most recent batch link file template ([Batch_Entitlement-2013-09-07_Version-1](#)).
2. Review Readme tab in the file template.
3. Enter up to 2,500 contracts and warranties per template.
4. Save the Template in CSV format.
5. Choose your user name and e-mail display settings.
6. Check the boxes required.
7. Browse for .csv file on your local machine and then upload. (Maximum of 2 files pending at a time.)

Choosing 'Yes' will allow other HP Support Center users to see your user name and e-mail address if they link agreement, HP Care Pack or warranty you own. [i](#)

☒ Yes
 ☐ No
 UPDATE

* = Required field

☐ I am using the most recent batch link file template ([Batch_Entitlement-2013-09-07_Version-1](#)). *

☐ I have saved my batch link file template as a .csv file. *

Batch File for Upload *

BROWSE

UPLOAD

(Maximum length is 50 characters, maximum size is 5 MB)

CSV file size and requirements

The file name must have an extension of .csv. File maximums:

- Name length: 50 characters.
- Size: 5 MB
- Number of lines: 2500

Upload status values

After you upload the CSV file, a popup window appears. Click on the **Close** button. An initial file check occurs verifying that the file size is within limits and has the correct file extension. If this file check succeeds, the batch upload summary page displays. This page lists the upload date and status, and a link to a report file, for each CSV file you have uploaded. Click on a report file link to view the report, which contains details about the upload. You can also save the report file. The default sort for the list is by date. Click on the Status or Report file headings to sort by those fields instead. Status values for each uploaded batch file in the list are as follows:

- Completed.
- Completed with errors. See the report file for details.
- Invalid file format. The file was not recognized as a valid CSV file.
- File exceeds limit. The file was longer than 2500 lines or greater than 5 MB.

- Pending. Files that have been received and have not completed processing. A maximum of two uploads can be pending.
- System error. The file itself may be fine. Try uploading again later.

CSV file field values

The CSV field values are the same as the columns in the Excel spreadsheet. They are, in order:

- A. One of:
 - Service Agreement ID (SAID)
 - HP Care Pack ID
 - Warranty serial number
- B. The product number of the product covered by the HP Care Pack or by the warranty, if the obligation type is HP Care Pack or Warranty.
- C. Support Account Reference, if the obligation type is Support Agreement
- D. Obligation Type. One of:
 - Support Agreement
 - HP Care Pack
 - Warranty
- E. Country (HP Care Pack or warranty only).
- F. Ownership Model: Multiple or Single.
- G. Nickname. Optional. You can add a nickname for an HP Care Pack or warranty. SAIDs have predefined nicknames, added at the time of signing the contract.

Normally you export from the downloaded template and "save as", and do not need to edit or even look at the CSV file. There may be cases however, such as if an invalid file format error occurs and you suspect that the file may be corrupt, where it is useful to inspect the file.

The following is a valid sample line for a warranty from a CSV file. In this example, double commas surround an empty optional field. The third field, SAR, is empty because a warranty does not need an SAR.

```
XY08K33099,SP936UC,,Warranty,France,SINGLE,WarrantyNickName1
```

Each line should contain at least six commas. Additional commas at the end of the line, which may occur if any text, even a space, was in the seventh column of the template file you exported from, are ignored.

Report files list the processing result of each line including entries that were not able to be processed, typically for the following reasons:

- A support agreement was inactive or was in single ownership mode.
- A warranty was inactive or was migrated to an Uplifted Care Pack.
- An HP Care Pack was inactive, was in single ownership mode, or was uplifted to a Support Agreement.

You should address these cases individually, by reactivating or by changing the ownership mode to multiple. Once you have done so you can then resubmit a file containing these entries for batch processing, or depending on their number, simply link them interactively.

Chapter 8: Support and other resources

Contacting HP

For worldwide technical support information, see the HP support website:

<http://www.hp.com/support>

Before contacting HP, collect the following information:

- Product model names and numbers
- Technical support registration number (if applicable)
- Product serial numbers
- Error messages
- Operating system type and revision level
- Detailed questions

HP Authorized Channel Partners

For the name of the nearest HP Authorized Channel Partner, see the following sources:

- In the United States, see the HP U.S. service locator website: http://www.hp.com/service_locator
- In other locations, see the Contact HP worldwide website: <http://www.hp.com/go/assistance>

Documentation feedback

HP welcomes your feedback. To make comments and suggestions about product documentation, send a message to: docsfeedback@hp.com. Include the document title and part number in your message. All submissions become the property of HP.

Related information

- HP Insight Remote Support documentation at the *HP Enterprise Information Library* (<http://www.hp.com/go/insightremotesupport/docs>)
- *HP Insight Online FAQs* (<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-9252ENW>)
- HP Support Center Insight Online help (http://h20564.www2.hp.com/portal/site/hpsc/template.PUBLIC_SPF_GLOBAL_HELP/#insightOnline)