

HP Insight Remote Support and Insight Online Setup Guide for HP ProLiant Servers and HP BladeSystem c-Class Enclosures

Abstract

This document provides instructions for configuring and using the embedded Remote Support feature on HP ProLiant Gen8 and Gen9 servers and HP BladeSystem c-Class enclosures. This document is intended for system administrators, HP representatives, and HP Authorized Channel Partners who are involved in configuring and using HP remote support tools and Insight Online. The HP remote support tools include the following:

- Insight Online direct connect
- Insight Remote Support central connect



© Copyright 2012, 2014 Hewlett-Packard Development Company, L.P.

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Acknowledgments

Microsoft® and Windows® are trademarks of the Microsoft Group of companies.

Red Hat® is a registered trademark of Red Hat, Inc. in the United States and other countries.

Contents

1	About Insight Remote Support.....	5
	HP remote support overview.....	5
	Using Insight Remote Support with HP Proactive Care service.....	6
2	Prerequisites.....	8
	Preinstallation.....	8
	Setting up an HP ProLiant Gen8 or Gen9 server for remote support registration.....	9
	Setting up an HP BladeSystem c-Class enclosure for remote support registration.....	12
	Verifying access to Insight Online.....	13
3	Using Insight Online direct connect.....	14
	Registering devices for Insight Online direct connect.....	14
	Unregistering devices from Insight Online direct connect.....	28
4	Using Insight Remote Support central connect.....	30
	Registering devices for Insight Remote Support central connect.....	30
	Unregistering devices from Insight Remote Support central connect.....	36
5	Working with service events and collections.....	38
	Sending a test service event.....	38
	Viewing a test service event.....	40
	Sending data collection information.....	41
	Sending Active Health System reporting information (HP ProLiant Gen8 and Gen9 servers only).....	43
	Viewing data collection information.....	45
6	Re-registering HP ProLiant Gen8 or Gen9 servers and HP BladeSystem c-Class enclosures.....	47
	Registering an HP ProLiant Gen8 or Gen9 server used as a Hosting Device for Insight Online direct connect.....	47
	Changing the remote support configuration of an HP ProLiant Gen8 or Gen9 server or HP BladeSystem c-Class enclosure.....	48
7	Troubleshooting.....	49
	General issues.....	49
	Insight Online direct connect.....	54
	Insight Remote Support central connect.....	55
8	Support and other resources.....	58
	HP support information.....	58
	Related documents.....	58
A	Using Agentless Management and the Agentless Management Service.....	59
	Verifying AMS installation.....	60
B	Verifying HP ProLiant iLO 3/4 driver installation (HP ProLiant Gen8 and Gen9 servers only).....	61
	Verifying driver installation: Windows.....	61
	Verifying driver installation: Linux, VMware, and Ubuntu.....	61
C	Service events.....	62
D	Configuring the Hosting Device.....	64
	Running the Hosting Device Setup Wizard.....	64
	Configuring the RIBCL protocol.....	66

Configuring the HP SIM Adapter.....	66
Glossary.....	68
Index.....	69

1 About Insight Remote Support

HP remote support overview

HP has developed a service and support solution that integrates the following:

- An online, personalized dashboard (HP Insight Online)
- 24x7 remote support with HP Insight Remote Support software and Insight Online direct connect capability

The solution described in this document provides options for registering HP ProLiant Gen8 and Gen9 servers and HP BladeSystem c-Class enclosures by using the embedded Remote Support functionality available through the iLO web interface, Intelligent Provisioning, and Onboard Administrator. If you do not want to use the embedded Remote Support functionality, you can configure Remote Support for your HP ProLiant servers and HP BladeSystem c-Class enclosures by using SNMP agents or WBEM providers (HP ProLiant servers) and SNMP (HP BladeSystem c-Class enclosures). For information about using these alternate configurations, see the *HP Insight Remote Support Monitored Devices Configuration Guide*.

When you use the embedded Remote Support functionality with an HP ProLiant server or HP BladeSystem c-Class enclosure, you can choose from the following configuration options:

Configuration options

- **Insight Online direct connect**—Register a server or enclosure to communicate directly with Insight Online without the need to set up an Insight Remote Support centralized Hosting Device in your local environment. Insight Online will be your primary interface for remote support information.


Insight Online is an HP Support Center feature that enables you to view your remotely monitored devices anywhere, anytime. It provides a personalized dashboard for simplified tracking of IT operations and support information, including a mobile dashboard for monitoring when you are on the go. For more information, see <http://www.hp.com/go/insightonline/info>.

The direct connect configuration is available in the following HP products:

- iLO 4 1.40 and later (HP ProLiant Gen8 servers)
- iLO 4 2.00 and later (HP ProLiant Gen9 servers)
- Intelligent Provisioning 1.60 and later (HP ProLiant Gen8 servers)
- Intelligent Provisioning 2.01 and later (HP ProLiant Gen9 servers)
- Onboard Administrator 4.11 and later

Figure 1 (page 6) shows the direct connect configuration with an HP ProLiant server.

Figure 1 Insight Online direct connect

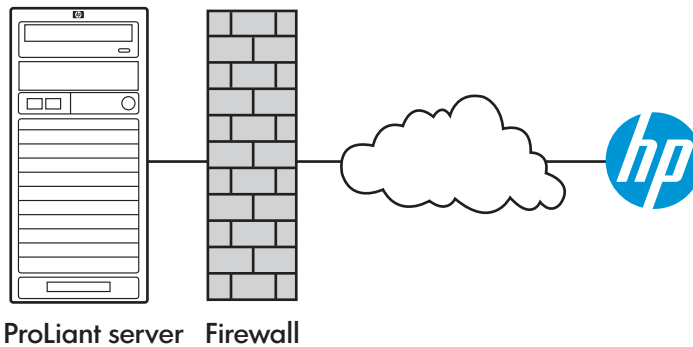

- **Insight Remote Support central connect**—Register a server or enclosure to communicate with HP through an Insight Remote Support centralized Hosting Device in your local environment. All configuration and service event information is routed through the Hosting Device. This information can be viewed using the local Insight RS Console or the web-based view in Insight Online (if it is enabled in Insight RS).


NOTE: This document uses the name Insight RS to refer to the software that is specific to the Insight Remote Support central connect configuration.

The central connect configuration is available in the following HP products:

- iLO 4 1.10 and later (HP ProLiant Gen8 servers)
- iLO 4 2.00 and later (HP ProLiant Gen9 servers)
- Intelligent Provisioning 1.20 and later (HP ProLiant Gen8 servers)
- Intelligent Provisioning 2.01 and later (HP ProLiant Gen9 servers)
- Onboard Administrator 3.60 and later

Figure 2 (page 6) shows the central connect configuration with an HP ProLiant server.

Figure 2 Insight Remote Support central connect

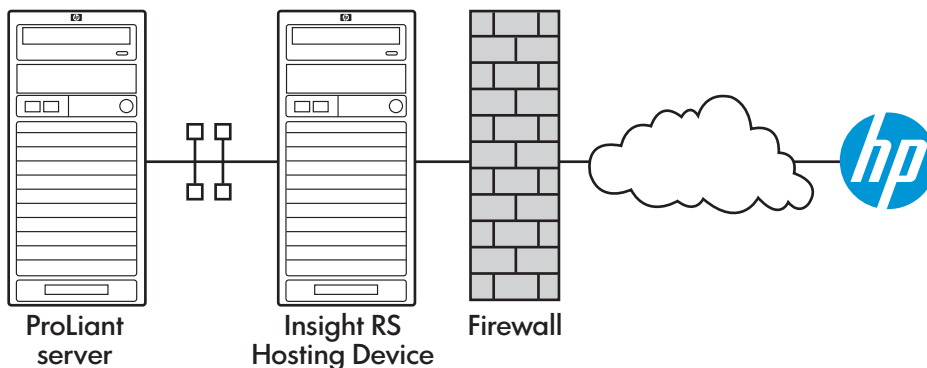

Using Insight Remote Support with HP Proactive Care service

HP Proactive Care service customers must register their HP ProLiant Gen8 and Gen9 servers for Insight Remote Support central connect or Insight Online direct connect in order to receive the

following HP Proactive Care services features: Proactive Scan and Firmware/Software Version Report and recommendations.

- The direct connect option requires the installation of AMS.
- The central connect option requires the installation of AMS or the SNMP/WBEM agents.

For more information about the HP Proactive Care service, see the following website: <http://www.hp.com/services/proactivecarecentral>.

2 Prerequisites

Complete the tasks in this chapter before configuring the Insight Remote Support solution.

Preinstallation

1. Verify that a supported browser is available on the computer you will use to log in to iLO, OA, the Insight RS Hosting Device (Insight Remote Support central connect only), and Insight Online.

Product	Microsoft Internet Explorer	Mozilla Firefox	Google Chrome
iLO	8, 10	ESR 24	latest version
OA	8, 9, 10, 11	ESR 17, ESR 24	latest version
Insight RS	8, 9, 10, 11	ESR 24, 29	33
Insight Online	8 or later	18	24 or later

2. If you do not have an HP Passport account, create one.
You can create an account at the following website: <http://www.hp.com/go/insightonline>.
HP Passport profile information is secure. It is protected by industry-standard encryption technology and follows strict HP privacy policies.
3. Navigate to the following website and verify that the product you will register for Insight Remote Support has an active HP warranty, HP Care Pack, or contract: <http://h20000.www2.hp.com/bizsupport/TechSupport/WarrantyLookup.jsp>.
4. Collect the following information for use during Step 2 of the Insight Online direct connect registration procedure or the Hosting Device configuration procedure:
 - Contact information. HP uses this information when a support case is created.
 - Site information (site name, address, and time zone). HP uses this information when service personnel or a part must be sent to your location.
 - Web proxy information (if a web proxy is used to access the Internet).
 - Channel Partner IDs for your authorized service provider, reseller/distributor, and installer, if you want to allow Channel Partners to view your device information. The installer is required only for Insight Remote Support central connect.
The Partner ID is the Location ID assigned to the Channel Partner during the partner registration process. If you do not know a Channel Partner's ID, contact the partner to obtain that information.
5. For HP ProLiant server registration: Obtain the iLO hostname or IP address and login credentials (login name and password).
You can use any local or directory-based user account that has the Configure iLO Settings privilege.
6. For HP BladeSystem c-Class enclosure registration: Obtain the OA hostname or IP address and login credentials (user name and password).
You can use any local or directory-based user account that has the OA Administrator privilege.

Setting up an HP ProLiant Gen8 or Gen9 server for remote support registration

The method you use to set up an HP ProLiant server for remote support registration depends on whether you will use iLO or Intelligent Provisioning to perform the registration procedure.

- For iLO registration, see “Method 1: Setting up an HP ProLiant Gen8 or Gen9 server for registration through the iLO web interface” (page 9).
- For Intelligent Provisioning registration, see “Method 2: Setting up an HP ProLiant Gen8 or Gen9 server for registration through Intelligent Provisioning” (page 11).

This document provides instructions for configuring and using the embedded Remote Support functionality available through the iLO web interface and Intelligent Provisioning. If you do not want to use the embedded Remote Support functionality, you can configure remote support for your HP ProLiant server by using SNMP agents or WBEM providers. For information about using this alternate configuration, see the *HP Insight Remote Support Monitored Devices Configuration Guide*.

Method 1: Setting up an HP ProLiant Gen8 or Gen9 server for registration through the iLO web interface

Downloading the required files

Ensure that you have the files you need to set up or update an HP ProLiant server. Depending on your configuration, you might need the files listed in Table 1 (page 9).

Table 1 HP ProLiant server setup files for iLO registration

File	Download path
HP SPP The HP SPP includes the iLO firmware, drivers, utilities, and AMS. As an alternative to downloading this large file, you can download the individual components separately.	HP SPP website: http://www.hp.com/go/spp
iLO firmware For HP ProLiant Gen8 servers: • Version 1.40 or later is required for Insight Online direct connect registration. • Version 1.10 or later is required for Insight Remote Support central connect registration. For HP ProLiant Gen9 servers: • Version 2.00 or later is required for Insight Online direct connect and Insight Remote Support central connect registration.	HP Support Center: http://www.hp.com/support/ilo4
HP ProLiant iLO 3/4 Channel Interface Driver	HP Support Center: http://www.hp.com/support/ilo4
AMS installer (optional) For more information about AMS, see “Using Agentless Management and the Agentless Management Service” (page 59).	• HP Support website (all operating systems): http://www.hp.com/support • HP Support Center (Windows, SUSE, Red Hat, and VMware): http://www.hp.com/support/ilo4 • Management Component Pack for ProLiant (Ubuntu): http://downloads.linux.hp.com/SDR/

Setting up an HP ProLiant Gen8 or Gen9 server

Use this procedure to set up an HP ProLiant server that you want to register for Insight Remote Support.

1. Install the HP ProLiant server hardware.
2. Connect iLO to the network.
3. Install the system software.

During this process, you can configure hardware settings, install an operating system, and configure iLO settings. When you configure iLO, record the iLO IP address. Intelligent Provisioning will prompt you to register for Insight Remote Support. If you want to use iLO to register for Insight Remote Support, select **Register Later** on the Intelligent Provisioning **Insight Remote Support** page.

4. Optional: If you did not use the Intelligent Provisioning **Recommended** installation method for the operating system installation, install AMS.

HP recommends installing AMS. For more information, see [“Using Agentless Management and the Agentless Management Service”](#) (page 59).

HP Proactive Care services customers only: AMS installation is required in order to receive the following HP Proactive Care services features: Proactive Scan and Firmware/Software Version Report and recommendations.

AMS is one way in which iLO can obtain the server name. If iLO cannot obtain the server name, the displayed server name in Insight Online and Insight RS is derived from the server serial number. If you do not install AMS, do one of the following to ensure that the server name is displayed correctly in Insight Online and Insight RS:

- For Windows systems only, start the operating system. Insight Online and Insight RS will use the Windows computer name to identify the server.
- Configure the **Server Name** on the **Administration**→**Access Settings** page in the iLO web interface.

NOTE: The server name is displayed in Insight Online and Insight RS, and can be viewed by HP Support and your authorized service provider, reseller/distributor, and installer. To protect your privacy, do not use sensitive information in the name of an HP ProLiant server.

5. If you did not use the Intelligent Provisioning **Recommended** installation method for the operating system installation, install the HP ProLiant iLO 3/4 Channel Interface Driver.

For information about verifying the driver installation, see [“Verifying HP ProLiant iLO 3/4 driver installation \(HP ProLiant Gen8 and Gen9 servers only\)”](#) (page 61).

6. Verify that a supported version of the iLO 4 firmware is installed.

For HP ProLiant Gen8 servers:

- Version 1.40 or later is required for Insight Online direct connect registration.
- Version 1.10 or later is required for Insight Remote Support central connect registration.

For HP ProLiant Gen9 servers:

- Version 2.00 or later is required for Insight Online direct connect and Insight Remote Support central connect registration.

For information about installing an iLO firmware update, see the *HP iLO 4 User Guide*.

7. Verify that the time zone is set in iLO.

If the **Time Zone** value is incorrect, Insight Online will display incorrect time stamps for events and data collections.

For more information, see the *HP iLO 4 User Guide*.

8. Verify that a DNS server is configured in iLO.

By default, iLO is set to use DHCP to configure DNS servers and other network settings.

For more information, see the *HP iLO 4 User Guide*.

Method 2: Setting up an HP ProLiant Gen8 or Gen9 server for registration through Intelligent Provisioning

Downloading the required files

Ensure that you have the files you need to set up or update an HP ProLiant server. Depending on your configuration, you might need the files listed in [Table 2 \(page 11\)](#).

Table 2 HP ProLiant server setup files for Intelligent Provisioning registration

File	Download path
HP SPP The HP SPP includes the iLO firmware, drivers, utilities, and AMS. As an alternative to downloading this large file, you can download the individual components separately.	HP SPP website: http://www.hp.com/go/spp
iLO firmware For HP ProLiant Gen8 servers: • Version 1.40 or later is required for Insight Online direct connect registration. • Version 1.10 or later is required for Insight Remote Support central connect registration. For HP ProLiant Gen9 servers: • Version 2.00 or later is required for Insight Online direct connect and Insight Remote Support central connect registration.	HP Support Center: http://www.hp.com/support/ilo4
HP Intelligent Provisioning software For HP ProLiant Gen8 servers: • Version 1.60 or later is required for Insight Online direct connect registration. • Version 1.20 or later is required for Insight Remote Support central connect registration. For HP ProLiant Gen9 servers: • Version 2.01 or later is required for Insight Online direct connect and Insight Remote Support central connect registration. NOTE: Use the Intelligent Provisioning Firmware Update feature to install a supported version of Intelligent Provisioning.	HP Intelligent Provisioning website: http://www.hp.com/go/intelligentprovisioning

Setting up an HP ProLiant Gen8 or Gen9 server

Use this procedure to set up an HP ProLiant server that you want to register for Insight Remote Support.

1. Install the HP ProLiant server hardware.
2. Connect iLO to the network.
3. Verify that a supported version of Intelligent Provisioning is installed.

For HP ProLiant Gen8 servers:

- Version 1.60 or later is required for Insight Online direct connect registration.
- Version 1.20 or later is required for Insight Remote Support central connect registration.

For HP ProLiant Gen9 servers:

- Version 2.01 or later is required for Insight Online direct connect and Insight Remote Support central connect registration.

4. Verify that a supported version of the iLO 4 firmware is installed.

For HP ProLiant Gen8 servers:

- Version 1.40 or later is required for Insight Online direct connect registration.
- Version 1.10 or later is required for Insight Remote Support central connect registration.

For HP ProLiant Gen9 servers:

- Version 2.00 or later is required for Insight Online direct connect and Insight Remote Support central connect registration.

For information about installing an iLO firmware update, see the *HP iLO 4 User Guide*.

5. Verify that the time zone is set in iLO.

If the **Time Zone** value is incorrect, Insight Online will display incorrect time stamps for events and data collections.

For more information, see the *HP iLO 4 User Guide*.

6. Verify that a DNS server is configured in iLO.

By default, iLO is set to use DHCP to configure DNS servers and other network settings.

For more information, see the *HP iLO 4 User Guide*.

Setting up an HP BladeSystem c-Class enclosure for remote support registration

This document provides instructions for configuring and using the embedded Remote Support functionality available through OA. If you do not want to use the embedded Remote Support functionality, you can configure remote support for your HP BladeSystem c-Class enclosure by using SNMP. For information about using this alternate configuration, see the *HP Insight Remote Support Monitored Devices Configuration Guide*.

Downloading the required files

Ensure that you have the files you need to set up or update an HP BladeSystem c-Class enclosure. Depending on your configuration, you might need the files listed in [Table 3 \(page 12\)](#).

Table 3 HP BladeSystem c-Class enclosure setup files for enclosure registration

File	Download path
HP SPP The HP SPP includes the OA firmware. As an alternative to downloading this large file, you can download the individual components separately.	HP SPP website: http://www.hp.com/go/spp
OA firmware Version 4.11 or later is required for Insight Online direct connect registration. Version 3.60 or later is required for Insight Remote Support central connect registration.	OA website: http://www.hp.com/go/oa Click Software & Drivers , and then click the link for your OA option. Select an operating system.

Setting up an HP BladeSystem c-Class enclosure

Use this procedure to set up an HP BladeSystem c-Class enclosure that you want to register for Insight Remote Support.

1. Verify that a supported version of the OA firmware is installed on all OA modules in the enclosure.
 - Version 4.11 or later is required for Insight Online direct connect registration.
 - Version 3.60 or later is required for Insight Remote Support central connect registration.

For information about installing an OA firmware update, see the *HP BladeSystem Onboard Administrator User Guide*.
2. For Insight Remote Support central connect only: Install a valid Insight Remote Support certificate if the OA is operating in FIPS mode.

If the OA is operating in FIPS mode, certificates must have an RSA key length of 2,048 bits, and the signature hash algorithm must be SHA1, SHA-224, SHA-256, SHA-384, or SHA-512. For information about Insight Remote Support certificates, see the *HP BladeSystem Onboard Administrator User Guide*.
3. Verify that a DNS server is configured in OA.

The **Enable Dynamic DNS** setting is enabled by default in OA.

For more information, see the *HP BladeSystem Onboard Administrator User Guide*.

Verifying access to Insight Online

To verify your access to Insight Online:

1. Navigate to the following website: <http://www.hp.com/go/insightonline>.

The HP Passport **Sign in** page opens.
2. Enter your HP Passport **User ID** and **Password**, and then click **Sign in**.

If you do not have an HP Passport account, click **Create an account** and follow the onscreen instructions.

The HP Support Center website is displayed with the **Insight Online My IT Environment** tab selected.

During the initial setup, your IT Environment shows no entries in the **Devices**, **Service events**, and **Contracts and warranties** sections.

3 Using Insight Online direct connect

Registering devices for Insight Online direct connect

Prerequisites

Verify the following before registering an HP ProLiant server or an HP BladeSystem c-Class enclosure:

- The preinstallation steps have been completed.
For more information, see [“Preinstallation”](#) (page 8).

- The device you want to register is not in use as an Insight RS or Insight Remote Support Advanced Hosting Device.

HP does not support Insight Online direct connect registration of an HP ProLiant server that is used as an Insight RS or Insight Remote Support Advanced Hosting Device. If you register an active Hosting Device for Insight Online direct connect, all of the devices that are monitored by that Hosting Device will be unable to communicate with HP to receive remote support.


For more information, see [“Registering an HP ProLiant Gen8 or Gen9 server used as a Hosting Device for Insight Online direct connect”](#) (page 47).

- The device you want to register is set up for Remote Support registration.
 - For HP ProLiant server setup information, see [“Setting up an HP ProLiant Gen8 or Gen9 server for remote support registration”](#) (page 9).
 - For HP BladeSystem c-Class enclosure setup information, see [“Setting up an HP BladeSystem c-Class enclosure for remote support registration”](#) (page 12).
- Your access to Insight Online is verified. For more information, see [“Verifying access to Insight Online”](#) (page 13).

Insight Online direct connect network requirements

Insight Remote Support relies on communication between your environment and HP to deliver support services. Ensure that your network meets the port requirements shown in [Figure 3](#) (page 14).

Figure 3 Network requirements for Insight Online direct connect

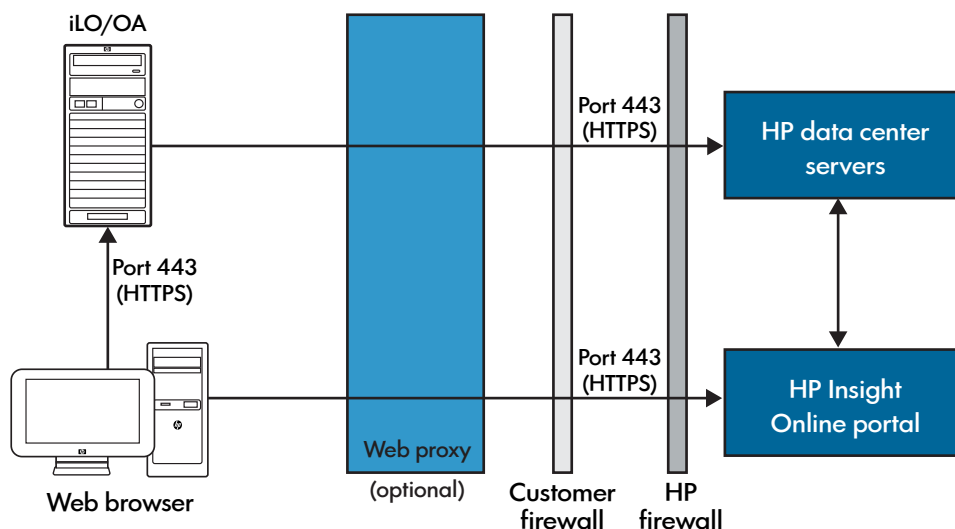

Registering an HP ProLiant Gen8 or Gen9 server for Insight Online direct connect

You can use iLO or Intelligent Provisioning to register an HP ProLiant server for Insight Online direct connect.



TIP: You can use RIBCL XML scripts to register a group of HP ProLiant servers. For more information, see the *HP iLO 4 Scripting and Command Line Guide*.

Method 1: Using iLO to register for Insight Online direct connect

Use this procedure to register an HP ProLiant server for Insight Online direct connect remote support. When you register for Insight Online direct connect, you must complete steps in both the iLO web interface and the Insight Online portal.

You must have the Configure iLO Settings privilege to modify the iLO remote support settings.

1. Verify that the server meets the prerequisites for using the Insight Remote Support solution.
For more information, see [“Prerequisites” \(page 14\)](#).
2. Log in to the iLO web interface (<https://<iLO hostname or IP address>>).
3. Navigate to the **Remote Support**→**Registration** page.
4. Select **Register this server directly to HP**.

The page refreshes to show the Insight Online direct connect registration options.

Registration

Quick Setup for HP Insight Remote Support


This server is not registered

HP Insight Remote Support offers 24x7 remote monitoring for HP devices and provides automatic notifications, accurate diagnosis, and faster problem resolution for hardware issues.

Read more: www.hp.com/go/insightremotesupport

Select one of two ways to register:



☒ Register this server directly to HP



☐ Register this server through an HP Insight Remote Support centralized hosting device

Step 1 of 2: Register this server directly to HP Insight Online

Enter HP Passport Credentials *Don't have an account?*

HP Passport User ID

HP Passport Password

If your server uses a web proxy server to access the Internet, enter the web proxy configuration below first, before registering.

Web Proxy Server

Web Proxy Port

Web Proxy Username

Web Proxy Password

☐ I accept the terms and conditions of the [HP Software License Agreement](#) and the [HP Insight Management Additional License Authorization](#).

By registering, you agree to send registration, service events, configuration and Active Health System data to HP. For more information on the type of data collected, see the [iLO 4 User Guide](#). All data collected and sent to HP will be managed according to the [HP Data Privacy policy](#).

Register

5. Enter your HP Passport credentials in the **HP Passport User ID** and **HP Passport Password** boxes.
-
- ① **IMPORTANT:** In most cases, your HP Passport user ID is the same as the email address you used during the HP Passport registration process. If you changed your user ID in the HP Support Center, be sure to enter your user ID and not your email address.
-
6. Optional: Enter the following information if the HP ProLiant server uses a web proxy server to access the Internet:
 - **Web Proxy Server**
 - **Web Proxy Port**
 - **Web Proxy Username**
 - **Web Proxy Password**
 7. Select the check box **I accept the terms and conditions of the HP Software License Agreement and the HP Insight Management Additional License Authorization**.

NOTE: You can view these documents at <http://www.hp.com/go/SWlicensing>.

8. Click **Register**.

Clicking **Register** is Step 1 of a two-step registration process. Step 2 is completed in Insight Online.

By registering, you agree to send registration, service events, configuration, and Active Health System data to HP. For more information about the type of data collected, see the *HP iLO 4 User Guide*. All data collected and sent to HP will be managed according to the HP Privacy Statement, which you can review at the following website: <http://www.hp.com/go/privacy>.

When Step 1 is completed, the following message appears:

Step 1 of remote support registration has been completed. Please proceed to step 2 to complete the registration process.

Allow up to 5 minutes for your registration request to be fully processed.

9. Complete Step 2 of the registration process, as described in “[Completing registration in Insight Online](#)” (page 25).



TIP: To streamline the process when you have multiple servers to register, complete Step 1 for all of the servers, and then complete Step 2 for all of the servers during one Insight Online session.

10. Return to the **Remote Support→Registration** page in the iLO web interface, select the check box **Please confirm that you have completed the registration process in HP Insight Online**, and then click **Apply**.

Registration

Quick Setup for HP Insight Remote Support

Step 1 of remote support registration has been completed. Please proceed to step 2 to complete the registration process.

Step 2 of 2: Complete registration in HP Insight Online

Please go to www.hp.com/go/InsightOnline and log in using your HP Passport account to complete the registration process. You will be asked to provide your site, contact and partner information so that HP can deliver service for your server. Allow up to 5 minutes for your registration request to be fully processed before your device will be visible in HP Insight Online.

☐ Please confirm that you have completed the registration process in HP Insight Online.

Unregister Apply



TIP: You can use RIBCL XML scripts to complete this step for a group of HP ProLiant servers. For more information, see the *HP iLO 4 Scripting and Command Line Guide*.

A message similar to the following appears:

Successfully registered!

HP Passport User ID used to register this server: <HP Passport User ID>.

11. Optional: If you want to receive email alerts about system events, configure AlertMail on the **Administration→Management→AlertMail** page.

For more information, see the *HP iLO 4 User Guide*.

Editing the web proxy settings


Proxy settings must be maintained to enable an HP ProLiant server to continue to send Insight Remote Support data to HP. If the proxy settings change, use the following procedure to edit them:

1. Navigate to the **Remote Support→Registration** page.
2. Update the following settings, as needed:
 - **Web Proxy Server**
 - **Web Proxy Port**
 - **Web Proxy Username**
 - **Web Proxy Password**
3. Click **Apply**.

Method 2: Using Intelligent Provisioning to register for Insight Online direct connect

Use this procedure to register an HP ProLiant server for Insight Online direct connect remote support. When you register for Insight Online direct connect, you must complete steps in both Intelligent Provisioning and the Insight Online portal.

1. Verify that the server meets the prerequisites for using the Insight Remote Support solution.
For more information, see [“Prerequisites” \(page 14\)](#).
2. Start the initial configuration and registration tasks for Intelligent Provisioning, or navigate to the **Perform Maintenance** page, and then select **HP Insight Remote Support**.
The Remote Support registration page opens after you complete Step 1 and Step 2 of the initial configuration and registration tasks, or immediately if you used the **Perform Maintenance** page.
3. Select **Register this server directly to HP**.
The page refreshes to show the Insight Online direct connect registration options.

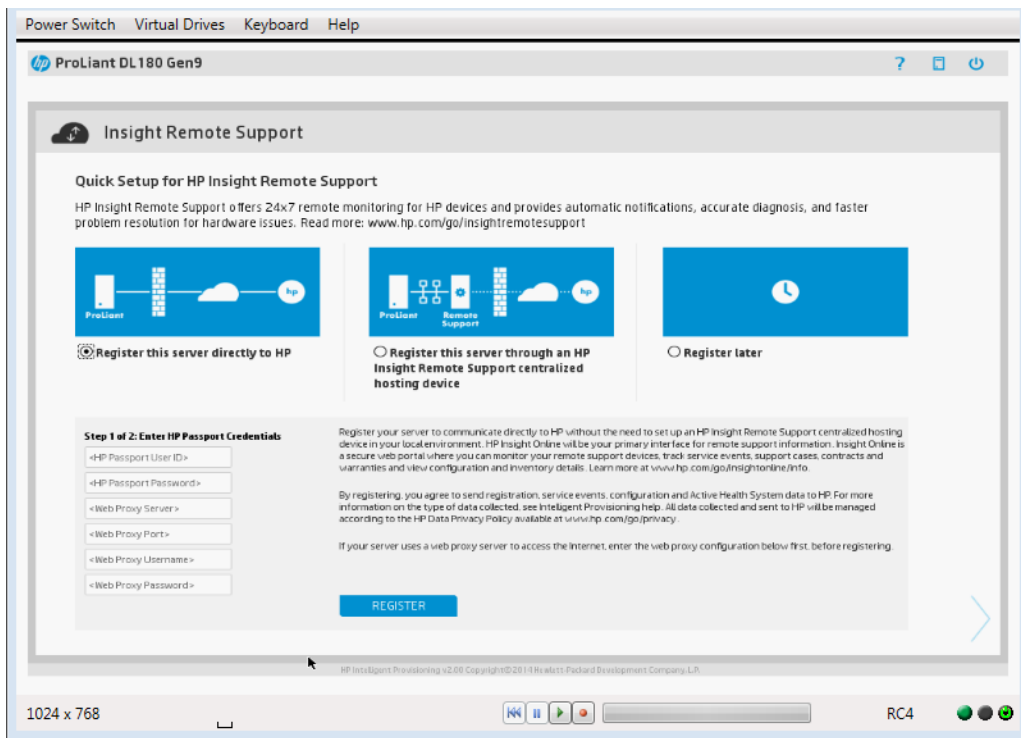

4. Enter your HP Passport credentials in the **HP Passport User ID** and **HP Passport Password** boxes.
-
- ❗ **IMPORTANT:** In most cases, your HP Passport user ID is the same as the email address you used during the HP Passport registration process. If you changed your user ID in the HP Support Center, be sure to enter your user ID and not your email address.
-
5. Optional: Enter the following information if the HP ProLiant server uses a web proxy server to access the Internet:
 - **Web Proxy Server**
 - **Web Proxy Port**
 - **Web Proxy Username**
 - **Web Proxy Password**
 6. Click **Register**.

Clicking **Register** is Step 1 of a two-step registration process. Step 2 is completed in Insight Online.

By registering, you agree to send registration, service events, configuration, and Active Health System data to HP. For more information about the type of data collected, see the *HP Intelligent Provisioning User Guide for HP ProLiant Gen8 Servers* or the *HP Intelligent Provisioning User Guide for HP ProLiant Gen9 Servers*. All data collected and sent to HP will be managed according to the HP Privacy Statement, which you can review at the following website: <http://www.hp.com/go/privacy>.

When Step 1 is completed, the following message appears:

Step 1 of 2: Completed using HP Passport Credentials: <HP Passport User ID>.

Step 2 of 2: Complete Registration in HP Insight Online (www.hp.com/go/InsightOnline).


Please confirm that you have completed the registration process in HP Insight Online.

Allow up to 5 minutes for your registration request to be fully processed.

7. Complete Step 2 of the registration process, as described in [“Completing registration in Insight Online” \(page 25\)](#).

TIP: To streamline the process when you have multiple servers to register, complete Step 1 for all of the servers, and then complete Step 2 for all of the servers during one Insight Online session.

8. Return to the **Insight Remote Support** page in Intelligent Provisioning, and then click **Confirm**.

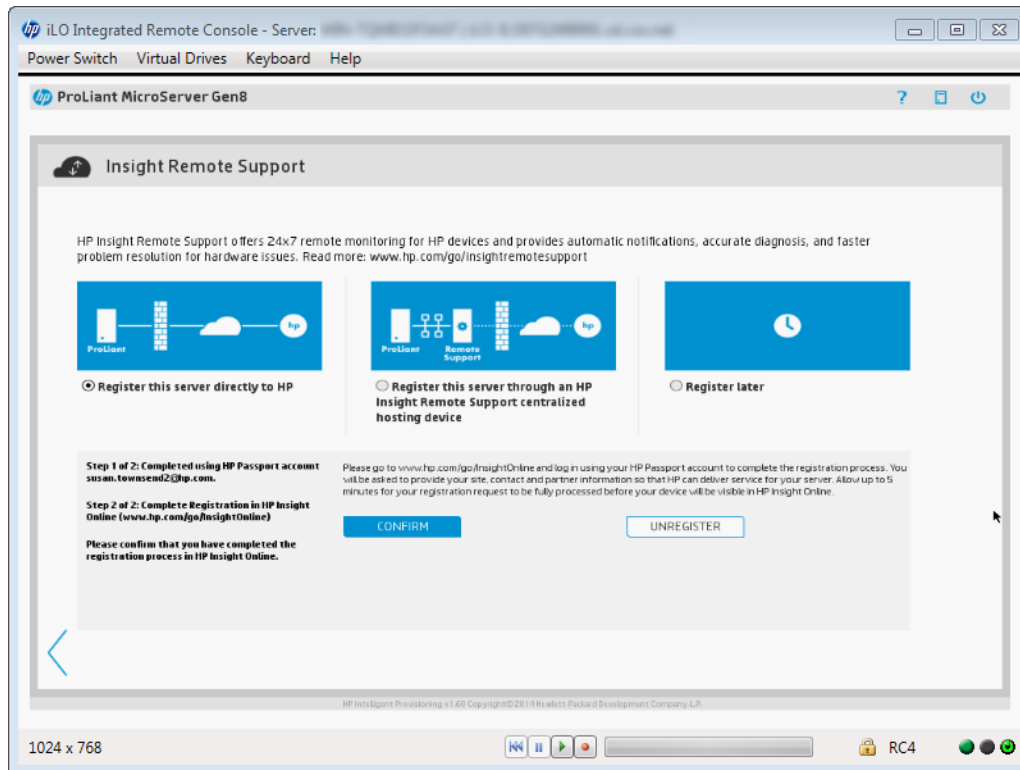

A message similar to the following appears:

Successfully registered!

HP Passport User ID used to register this server: <HP Passport User ID>.

9. Click the **Continue** right arrow to proceed to the Intelligent Provisioning home page.
10. To ensure successful Insight Remote Support operation, verify the following after you install the system software:
 - Optional: AMS is installed on the server and the server operating system is running.
HP recommends installing AMS. For more information, see [“Using Agentless Management and the Agentless Management Service” \(page 59\)](#).
AMS is installed automatically if you use the Intelligent Provisioning **Recommended** installation method.
HP Proactive Care services customers only: AMS installation is required in order to receive the following HP Proactive Care services features: Proactive Scan and Firmware/Software Version Report and recommendations.
AMS is one way in which iLO can obtain the server name. If iLO cannot obtain the server name, the displayed server name in Insight Online and Insight RS is derived from the

server serial number. If you do not install AMS, do one of the following to ensure that the server name is displayed correctly in Insight Online and Insight RS:

- For Windows systems only, start the operating system. Insight Online and Insight RS will use the Windows computer name to identify the server.
- Configure the **Server Name** on the **Administration**→**Access Settings** page in the iLO web interface.

The server name is displayed in Insight Online and Insight RS, and can be viewed by HP Support and your authorized service provider, reseller/distributor, and installer. To protect your privacy, do not use sensitive information in the name of an HP ProLiant server.

- The HP ProLiant iLO 3/4 Channel Interface Driver is installed.

This driver is installed automatically if you use the Intelligent Provisioning **Recommended** installation method.

For information about verifying the driver installation, see [“Verifying HP ProLiant iLO 3/4 driver installation \(HP ProLiant Gen8 and Gen9 servers only\)”](#) (page 61).

11. Optional: If you want to receive email alerts about system events, configure AlertMail on the **Administration**→**Management**→**AlertMail** page in iLO.


For more information, see the *HP iLO 4 User Guide*.

Editing the web proxy settings

Proxy settings must be maintained to enable an HP ProLiant server to continue to send Insight Remote Support data to HP. If the proxy settings change, use the following procedure to edit them:

1. Start Intelligent Provisioning.
2. Navigate to the **Perform Maintenance** page and select **HP Insight Remote Support**.
The **HP Insight Remote Support** page opens.

3. Click the **Update Proxy** link.
The **Update Web Proxy Settings** dialog box opens.

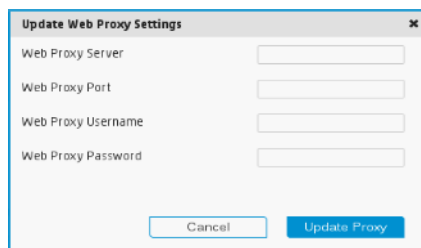

4. Update the following settings, as needed:
 - **Web Proxy Server**
 - **Web Proxy Port**
 - **Web Proxy Username**
 - **Web Proxy Password**
5. Click **Update Proxy**.

Registering an HP BladeSystem c-Class enclosure for Insight Online direct connect

Use this procedure to register an HP BladeSystem c-Class enclosure for Insight Online direct connect remote support. When you register for Insight Online direct connect, you must complete steps in both the OA web interface and the Insight Online portal.

1. Verify that the system meets the prerequisites for using the Insight Remote Support solution. For more information, see [“Prerequisites” \(page 14\)](#).
2. Log in to the OA web interface (<https://<OA hostname or IP address>>).
3. Navigate to the **Enclosure Information**→**Enclosure Settings**→**Remote Support** page.
4. Select **Register this enclosure directly to HP**.

The page refreshes to show the Insight Online direct connect registration options.

Wizards ▾ Options ▾ Help ▾

Enclosure Settings - [Print] [Help]

Registration Service Events Data Collections

Quick Setup for HP Insight Remote Support

⚠ This enclosure is not registered

Select one of two ways to register for HP Insight Remote Support:

Enclosure

Enclosure Hosting Device

☒ Register this enclosure directly to HP
 ☐ Register this enclosure through an HP Insight Remote Support centralized hosting device

Step 1 of 2: Register this enclosure directly to HP Insight Online

Enter HP Passport Credentials [Don't have an account?](#)

HP Passport User ID:*

HP Passport Password:*

If your enclosure uses a web proxy server to access the Internet, enter the web proxy configuration below first, before registering.

Web Proxy Server:

Web Proxy Username:

Web Proxy Password:

Web Proxy Port:

☐ I accept the terms and conditions of the [HP Software License Agreement](#) and the [HP Insight Management Additional License Authorization](#)

By registering, you agree to send registration, service events, and configuration data to HP. For more information on the type of data collected, see the [Onboard Administrator User Guide](#). All data collected and sent to HP will be managed according to the [HP Data Privacy Policy](#).

Register

5. Enter your HP Passport credentials in the **HP Passport User ID** and **HP Passport Password** boxes.
-
- ① **IMPORTANT:** In most cases, your HP Passport user ID is the same as the email address you used during the HP Passport registration process. If you changed your user ID in the HP Support Center, be sure to enter your user ID and not your email address.
-
6. Optional: Enter the following information if the HP BladeSystem c-Class enclosure uses a web proxy server to access the Internet:
 - **Web Proxy Server**
 - **Web Proxy Username**

- **Web Proxy Password**
 - **Web Proxy Port**
7. Select the check box **I accept the terms and conditions of the HP Software License Agreement and the HP Insight Management Additional License Authorization.**

NOTE: You can view these documents at <http://www.hp.com/go/SWlicensing>.

8. Click **Register**.

Clicking **Register** is Step 1 of a two-step registration process. Step 2 is completed in Insight Online.

By registering, you agree to send registration, service events, and configuration data to HP. For more information about the type of data collected, see the *HP BladeSystem Onboard Administrator User Guide*. All data collected and sent to HP will be managed according to the HP Privacy Statement, which you can review at the following website: <http://www.hp.com/go/privacy>.

When Step 1 is completed, the following message appears:

Step 1 of remote support registration has been completed. Please proceed to step 2 to complete the registration process.

Allow up to 5 minutes for your registration request to be fully processed.

9. Complete Step 2 of the registration process, as described in “[Completing registration in Insight Online](#)” (page 25).



TIP: To streamline the process when you have multiple enclosures to register, complete Step 1 for all of the enclosures, and then complete Step 2 for all of the enclosures during one Insight Online session.

10. Return to the **Enclosure Information**→**Enclosure Settings**→**Remote Support** page in the OA web interface, select the check box **Please confirm that you have completed the registration process in HP Insight Online**, and then click **Apply**.

The following message appears:

Are you sure you have completed registration in HP Insight Online?
Click OK to confirm or Cancel to cancel.

11. Click **OK**.

A message similar to the following appears:

Successfully registered! HP Passport User ID used to register this enclosure: <HP Passport User ID>.

12. Optional: If you want to receive email alerts about system events, configure AlertMail on the **Enclosure Information**→**Enclosure Settings**→**AlertMail** page.

For more information, see the *HP BladeSystem Onboard Administrator User Guide*.

Editing the web proxy settings

Proxy settings must be maintained to enable your enclosure to continue to send Insight Remote Support data to HP. If the proxy settings change, use the following procedure to edit them:

1. Navigate to the **Enclosure Information**→**Enclosure Settings**→**Remote Support** page.
2. Update the following settings, as needed:
 - **Web Proxy Server**
 - **Web Proxy Username**
 - **Web Proxy Password**
 - **Web Proxy Port**
3. Click **Apply**.

Completing registration in Insight Online

When you register for Remote Support by using the Insight Online direct connect configuration, you use iLO, Intelligent Provisioning, or OA to complete Step 1 of the two-step registration process. To complete Step 2 of the registration process, you must log in to Insight Online and provide additional information.



TIP: To streamline the process when you have multiple servers or enclosures to register, complete Step 1 for all of the servers or enclosures, and then complete Step 2 for all of the servers or enclosures during one Insight Online session.


1. Navigate to the following website: <http://www.hp.com/go/insightonline>.

The HP Passport **Sign in** page opens.


2. Log in with your HP Passport credentials.

The **Dashboard** page opens.

The **Devices** section of the page lists the number of devices for which you must complete Step 2 of the registration process.

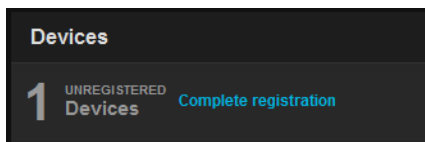

These devices are listed on the **Devices** page with an **INCOMPLETE** status.



3. Click the **Complete registration** link on the **Dashboard** page.

The **Complete device registration** page opens.

Complete device registration

1. SELECT TARGET DEVICES

2. PROVIDE SITE AND SUPPORT INFORMATION

3. PROVIDE HP AUTHORIZED CHANNEL PARTNER INFORMATION

4. VALIDATE AND SUBMIT

Thank you for registering your Insight Remote Support Direct Connect device(s)

You will be asked to specify site address, contact details and HP Authorized Channel Partner information for the device(s) you select from the table below. Service cannot be delivered until the registration information is completed.

Step 1: Select target devices

Select an unregistered device or devices from the table below. Your registration entries will be applied to all selected systems. If a checkbox is not selectable, you are not authorized to register the device or the device is already part of a registration in process.

Note: If you select more than 15 devices the registration will be completed in batch mode and you may choose to be notified by email.

IMPORTANT NOTE

When selecting multiple devices for registration, please ensure that the selected devices have the following in common:

- Site [service delivery address]
- Contact information
- HP Authorized Channel Partner information

Showing 1 – 4 of 4 | [View all](#)

Select All	Type/Model	Device name	Serial number	Model number
☐	ProLiant MicroServer Gen8			815P601007G
☐	ProLiant MicroServer Gen8			815P601007G
☐	ProLiant MicroServer Gen8			815P601007G
☐	ProLiant MicroServer Gen8			815P601007G

CANCEL REGISTRATION

NEXT

4. Select one or more target devices, and then click **NEXT**.

You can complete registration for up to 15 devices at a time if they share site, support and Channel Partner information.

The **PROVIDE SITE AND SUPPORT INFORMATION** page opens.

The screenshot shows the 'Complete device registration' page in the HP Insight Online interface. The page is divided into four steps: 1. SELECT TARGET DEVICES, 2. PROVIDE SITE AND SUPPORT INFORMATION (current step), 3. PROVIDE HP AUTHORIZED CHANNEL PARTNER INFORMATION, and 4. VALIDATE AND SUBMIT. The current step is titled 'Step 2: Provide site and support information' and includes instructions: 'Please enter the site information and support contacts below. * = Required field'. The 'Site information*' section contains fields for Company name (Hewlett-Packard), Site name, Address1 (11445 Compaq Center Dr W), Address2, Address3, City (Houston), State/Province (Texas), Postal code (77075), and Country (United States). The 'Primary service and support contact*' section has a dropdown menu labeled 'Select from this list'.

5. Enter site and support information, and then click **NEXT**.

The **PROVIDE HP AUTHORIZED CHANNEL PARTNER INFORMATION** page opens.

The screenshot shows the 'Complete device registration' page in the HP Insight Online interface, Step 3: Provide HP Authorized Channel Partner information. The page is divided into four steps: 1. SELECT TARGET DEVICES, 2. PROVIDE SITE AND SUPPORT INFORMATION, 3. PROVIDE HP AUTHORIZED CHANNEL PARTNER INFORMATION (current step), and 4. VALIDATE AND SUBMIT. The current step is titled 'Step 3: Provide HP Authorized Channel Partner information' and includes instructions: 'The form below allows you to assign an HP Authorized Channel Partner for one or more Insight Remote Support Direct Connect devices. Provide the 8 digit Partner location ID numbers below. Use the "Check ID" buttons to validate your entry. Select "Hewlett-Packard" if all of your product sales and support services are delivered by Hewlett-Packard. * = Required field'. The 'HP Authorized Service Partner*' section has radio buttons for Hewlett-Packard (selected) and Partner location ID (with a 'CHECK ID' button). The 'HP Authorized Reseller/Distributor*' section has radio buttons for Hewlett-Packard (selected) and Partner location ID (with a 'CHECK ID' button'). The 'Optimize my IT environment' section has a checkbox and a consent statement: 'I consent to having HP or my HP Authorized Reseller/Distributor contact me to discuss optimizing my IT environment.' The page includes 'BACK', 'CANCEL REGISTRATION', and 'NEXT' buttons.

6. Do one of the following:
 - Accept the default settings if HP provides support for your IT infrastructure.
 - If support is provided by an HP Authorized Channel Partner, enter the **Partner location ID** for an **HP Authorized Service Partner** and **HP Authorized Reseller/Distributor**.
Click **CHECK ID** to verify that you have selected the correct partner.
7. Optional: Select the **Optimize my IT environment** check box to allow HP or an Authorized Channel Partner to contact you about optimizing your HP environment.
8. Click **NEXT**.
The **VALIDATE AND SUBMIT** page opens.

Complete device registration

1. SELECT TARGET DEVICES

2. PROVIDE SITE AND SUPPORT INFORMATION

3. PROVIDE HP AUTHORIZED CHANNEL PARTNER INFORMATION

4. VALIDATE AND SUBMIT

Step 4: Validate and submit

Please review your registration information and click "COMPLETE REGISTRATION".

Validate site & support information

Site [Physical location of device]
Full name:
Address:
City:
State:
Country:
Primary service and support contact
Full name:
Email address:
Phone1:
Validate HP Authorized Channel Partner information

Validate target devices

Device name	Type/Model	Serial number
	ProLiant ML350p Gen8	

BACK

CANCEL REGISTRATION

COMPLETE REGISTRATION

9. Click **COMPLETE REGISTRATION**.
The **Device registration status** page opens.

Complete device registration

Device registration status: Success
Contract/ Warranty linking status: Success

Device registration status

The site information and contacts below have been assigned to the Insight Remote Support Direct Connect devices you selected.

Edit site information 	Primary Support Contact 	HP Authorized Service Partner Hewlett-Packard	HP Authorized Reseller/Distributor Hewlett-Packard
--------------------------------------	--	---	--

Contract/ warranty linking status

Contract and warranties associated with the registered devices have been linked to you. You may review them at [Manage contracts and warranties](#).

DONE

10. Click **DONE**.

Unregistering devices from Insight Online direct connect

Unregistering an HP ProLiant Gen8 or Gen9 server from Insight Online direct connect

You can use iLO or Intelligent Provisioning to unregister an HP ProLiant server from Insight Online direct connect.



TIP: You can use RIBCL XML scripts to unregister a group of HP ProLiant servers. For more information, see the *HP iLO 4 Scripting and Command Line Guide*.

Method 1: Using iLO to unregister from Insight Online direct connect

Use this procedure to discontinue monitoring of an HP ProLiant server that is registered for Insight Online direct connect.

You must have the Configure iLO Settings privilege to modify the remote support settings.

1. Log in to the iLO web interface (<https://<iLO hostname or IP address>>).
2. Navigate to the **Remote Support**→**Registration** page in the iLO web interface.
3. Click **Unregister**.

The following message appears:

Are you sure you want to unregister and disable automated support?

4. Click **OK**.

The following message appears:

Un-registration in progress. Please wait...

When the process is completed, the following message appears:

This server is not registered.

Method 2: Using Intelligent Provisioning to unregister from Insight Online direct connect

Use this procedure to discontinue monitoring of an HP ProLiant server that is registered for Insight Online direct connect.

1. Start Intelligent Provisioning.
2. Navigate to the **Perform Maintenance** page and select **HP Insight Remote Support**.
3. Click **Unregister**.

The following message appears:

This server is not registered.

Unregistering an HP BladeSystem c-Class enclosure from Insight Online direct connect

Use the following procedure to discontinue monitoring of an HP BladeSystem c-Class enclosure that is registered for Insight Online direct connect.

1. Log in to the OA web interface (<https://<OA hostname or IP address>>).
2. Navigate to the **Enclosure Information**→**Enclosure Settings**→**Remote Support** page.
3. Click **Unregister**.

The following message appears:

Are you sure you want to un-register and disable HP Insight Remote Support?

4. Click **OK**.

The following message appears:

Un-registration in progress. Please wait...

When the process is completed, the following message appears:

The enclosure is not registered.

4 Using Insight Remote Support central connect

Registering devices for Insight Remote Support central connect

Prerequisites

Verify the following before registering an HP ProLiant server or an HP BladeSystem c-Class enclosure:

- The preinstallation steps have been completed.
For more information, see [“Preinstallation”](#) (page 8).
- The device you want to register is supported by Insight Remote Support central connect. For more information, see http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/insight_rs.aspx.

NOTE: HP ProLiant Gen8 servers and HP BladeSystem c-Class enclosures are supported with Insight RS 7.0.9 or later.

HP ProLiant Gen9 servers are supported with Insight RS 7.1 or later.

- The device you want to register is set up for Remote Support registration.
 - For HP ProLiant server setup information, see [“Setting up an HP ProLiant Gen8 or Gen9 server for remote support registration”](#) (page 9).
 - For HP BladeSystem c-Class enclosure setup information, see [“Setting up an HP BladeSystem c-Class enclosure for remote support registration”](#) (page 12).
- Your access to Insight Online is verified. For more information, see [“Verifying access to Insight Online”](#) (page 13).


Insight Remote Support central connect network requirements

Insight Remote Support relies on communication between your environment and HP to deliver support services.

Use this procedure to prepare your network for the Insight Remote Support central connect solution.

1. Choose a server to use for the Insight RS Hosting Device, and verify that it meets the requirements listed in the *HP Insight Remote Support Release Notes*.
2. Ensure that your network meets the port requirements shown in [Figure 4](#) (page 31).

Figure 4 Network requirements for Insight Remote Support central connect

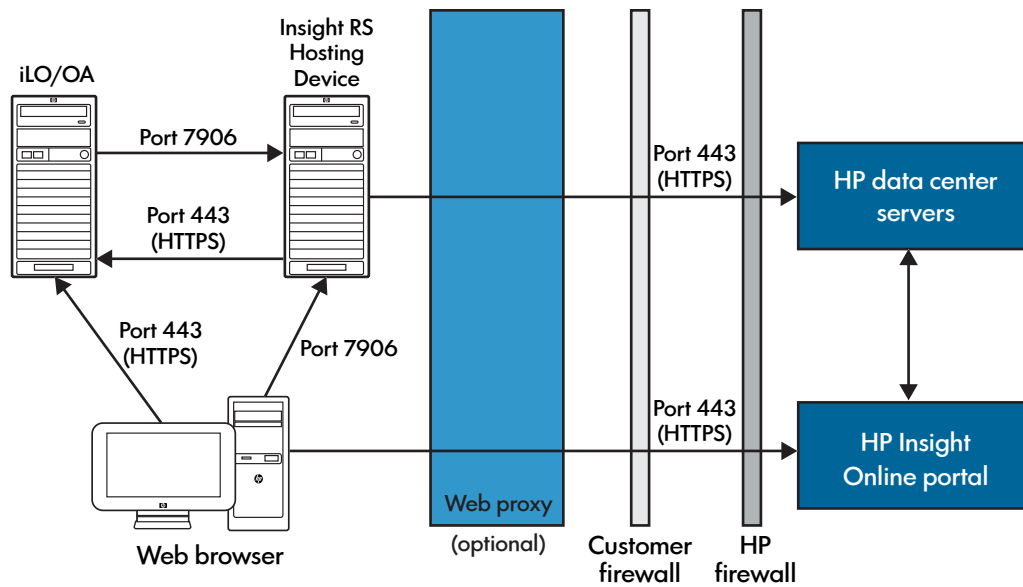

3. Verify communication between the Insight RS Hosting Device and the HP Remote Support web service.

To verify communication, start a web browser on the Insight RS Hosting Device and access the following website: <https://services.isee.hp.com/version>. If connectivity between the server and HP is set up correctly, the web browser displays the version of some of the data center components (for example, 14.3.0.188).

Setting up the Insight RS Hosting Device

Setting up the Hosting Device involves the following tasks:

- Configure the Hosting Device.

For more information, see the *HP Insight Remote Support Installation and Configuration Guide* or “[Running the Hosting Device Setup Wizard](#)” (page 64).

Ensure that the version of the Insight RS software on the Hosting Device supports the HP ProLiant servers and HP BladeSystem c-Class enclosures that you want to register for Insight Remote Support central connect. For more information, see http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/insight_rs.aspx.

- Configure the RIBCL protocol for HP ProLiant servers that will be registered for Insight Remote Support central connect.

For more information, see the *HP Insight Remote Support Installation and Configuration Guide* or “[Configuring the RIBCL protocol](#)” (page 66).

- Optional: If you will use HP SIM with Insight RS, configure the HP SIM adapter.

For more information, see the *HP Insight Remote Support Installation and Configuration Guide* or “[Configuring the HP SIM Adapter](#)” (page 66).

- Verify your access to Insight Online.

For more information, see the *HP Insight Remote Support Installation and Configuration Guide* or “[Verifying access to Insight Online](#)” (page 13).

Registering an HP ProLiant Gen8 or Gen9 server for Insight Remote Support central connect

You can use iLO or Intelligent Provisioning to register an HP ProLiant server for Insight Remote Support central connect.



TIP: You can use RIBCL XML scripts to register a group of HP ProLiant servers. For more information, see the *HP iLO 4 Scripting and Command Line Guide*.

Method 1: Using iLO to register for Insight Remote Support central connect

Use this procedure to register an HP ProLiant server for Insight Remote Support central connect. You must have the Configure iLO Settings privilege to modify the iLO remote support settings.

1. Verify that the server meets the prerequisites for using Insight Remote Support.
For more information, see “Prerequisites” (page 30).
2. Log in to the iLO web interface (<https://<iLO hostname or IP address>>).
3. Navigate to the **Remote Support**→**Registration** page.
4. Select **Register this server through an HP Insight Remote Support centralized hosting device**.
The page refreshes to show the Insight Remote Support central connect registration options.

The screenshot shows the 'Registration' page in the iLO web interface. At the top, there's a 'Quick Setup for HP Insight Remote Support' section. Below it, a yellow warning box states 'This server is not registered'. A message explains that HP Insight Remote Support offers 24x7 remote monitoring. Below this, a link 'Read more: www.hp.com/go/insightremotesupport' is provided. The main section is titled 'Select one of two ways to register:'. It contains two options: 'Register this server directly to HP' (unselected) and 'Register this server through an HP Insight Remote Support centralized hosting device' (selected). Below the selected option, there's a sub-section 'Register this server through an HP Insight Remote Support centralized hosting device'. This section includes a form with two input fields: 'Hosting Device hostname or IP address' and 'Port' (with '7906' entered). A disclaimer text is present below the form, and a 'Register' button is at the bottom right. A note at the bottom states: 'Note: Please verify that you are running Insight RS 7.x or higher.'

5. Enter the Insight RS **Hosting Device hostname or IP address** and **Port** number.
The default port is 7906.

6. Click **Register**.

By registering, you agree to send registration, service events, configuration, and Active Health System data to HP. For more information about the type of data collected, see the *HP iLO 4 User Guide*. All data collected and sent to HP will be managed according to the HP Privacy Statement, which you can review at the following website: <http://www.hp.com/go/privacy>.

A message similar to the following appears:

```
Successfully registered! Insight Remote Support hosting server:  
<cms.mycompany.com:port>.
```

where `<cms.mycompany.com:port>` is the Insight RS Hosting Device host name or IP address and port number.

Method 2: Using Intelligent Provisioning to register for Insight Remote Support central connect

Use this procedure to register an HP ProLiant server for Insight Remote Support central connect.

1. Verify that the server meets the prerequisites for using Insight Remote Support.


For more information, see “Prerequisites” (page 30).

2. Start the initial configuration and registration tasks for Intelligent Provisioning or navigate to the **Perform Maintenance** page, and then select **HP Insight Remote Support**.

The Remote Support registration page opens after you complete Step 1 and Step 2 of the initial configuration and registration tasks, or immediately if you used the **Perform Maintenance** page.

3. Select **Register this server through an HP Insight Remote Support centralized hosting device**.

The page refreshes to show the Insight Remote Support central connect registration options.

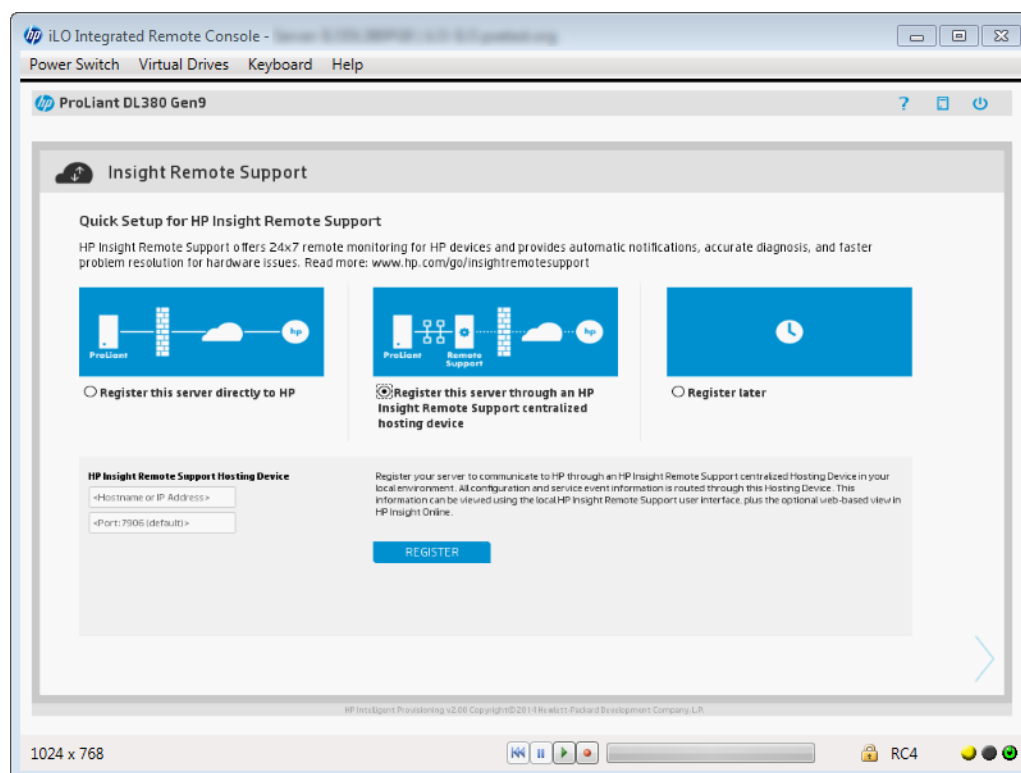

4. Enter the Insight RS Hosting Device host name or IP address and port number.

The default port is 7906.

5. Click **Register**.

By registering, you agree to send registration, service events, configuration, and Active Health System data to HP. For information about the type of data collected, see the *HP Intelligent Provisioning User Guide for HP ProLiant Gen8 Servers* or the *HP Intelligent Provisioning User Guide for HP ProLiant Gen9 Servers*. All data collected and sent to HP will be managed according to the HP Privacy Statement, which you can review at the following website: <http://www.hp.com/go/privacy>.

A message similar to the following appears:

```
Successfully registered! Insight Remote Support hosting server:
<cms.mycompany.com>.
```

where `<cms.mycompany.com>` is the Insight RS Hosting Device host name or IP address.

6. Click the **Continue** right arrow to proceed to the Intelligent Provisioning home page.

7. To ensure successful Insight Remote Support operation, verify the following after you install the system software:

- Optional: AMS is installed on the server and the server operating system is running.

HP recommends installing AMS. For more information, see “[Using Agentless Management and the Agentless Management Service](#)” (page 59).

AMS is installed automatically if you use the Intelligent Provisioning **Recommended** installation method.

HP Proactive Care services customers only: AMS installation is required in order to receive the following HP Proactive Care services features: Proactive Scan and Firmware/Software Version Report and recommendations.

AMS is one way in which iLO can obtain the server name. If iLO cannot obtain the server name, the displayed server name in Insight Online and Insight RS is derived from the server serial number. If you do not install AMS, do one of the following to ensure that the server name is displayed correctly in Insight Online and Insight RS:

- For Windows systems only, start the operating system. Insight Online and Insight RS will use the Windows computer name to identify the server.
- Configure the **Server Name** on the **Administration**→**Access Settings** page in the iLO web interface.

The server name is displayed in Insight Online and Insight RS, and can be viewed by HP Support and your authorized service provider, reseller/distributor, and installer. To protect your privacy, do not use sensitive information in the name of an HP ProLiant server.

- The HP ProLiant iLO 3/4 Channel Interface Driver is installed.

This driver is installed automatically if you use the Intelligent Provisioning **Recommended** installation method.

For information about verifying the driver installation, see “[Verifying HP ProLiant iLO 3/4 driver installation \(HP ProLiant Gen8 and Gen9 servers only\)](#)” (page 61).

Registering an HP BladeSystem c-Class enclosure for Insight Remote Support central connect

Use this procedure to register an HP BladeSystem c-Class enclosure for Insight Remote Support central connect.

1. Verify that the system meets the prerequisites for using Insight Remote Support.

For more information, see “[Prerequisites](#)” (page 30).

2. Log in to the OA web interface (<https://<OA hostname or IP address>>).

3. Navigate to the **Enclosure Information**→**Enclosure Settings**→**Network Access** page, and then click the **Protocols** tab.

The screenshot shows the 'Enclosure Settings - ENC1234567' page with the 'Protocols' tab selected. Below the tab bar, there is a note: 'Protocol Restrictions: These protocol settings can be used to deny or allow access to the enclosure.' A list of five checkboxes is shown, all of which are checked: 'Enable Web Access (HTTP/HTTPS)', 'Enable Secure Shell', 'Enable Telnet', 'Enable XML Reply (view)', and 'Enable Enclosure iLO Federation Support'. Below the list, it says 'Enclosure-enabled iLO Federation bays: 2'. An 'Apply' button is located at the bottom right of the settings area.

4. Verify that the **Enable XML Reply** check box is selected.
If this check box is not selected, the Insight RS Hosting Device cannot collect data from OA.
5. Navigate to the **Enclosure Information**→**Enclosure Settings**→**Remote Support** page.
6. Select **Register this enclosure through an HP Insight Remote Support centralized hosting device**.
The page refreshes to show the Insight Remote Support central connect registration options.

The screenshot shows the 'Enclosure Settings - ENC1234567' page with the 'Registration' tab selected. A yellow warning box at the top states 'This enclosure is not registered'. Below this, a section titled 'Quick Setup for HP Insight Remote Support' contains two options for registration. The first option, 'Register this enclosure directly to HP', is unselected. The second option, 'Register this enclosure through an HP Insight Remote Support centralized hosting device', is selected. Below the selected option, there is a form titled 'Enter Insight Remote Support hosting device information' with fields for 'Hostname or IP Address:*' and 'Port:*' (with '7906' entered). A note below the form states: 'Note: Please verify that you have installed and configured Insight RS 7.0.5 or later on a centralized hosting device.' A 'Register' button is at the bottom right. A legend at the bottom left indicates '* Required Field'.

7. Enter the Insight RS Hosting Device **Hostname or IP Address** and **Port** number.
The default port is 7906.
8. Click **Register**.
By registering, you agree to send registration, service events, and configuration data to HP. For more information about the type of data collected, see the *HP BladeSystem Onboard Administrator User Guide*. All data collected and sent to HP will be managed according to the HP Privacy Statement, which you can review at the following website: <http://www.hp.com/go/privacy>.
The following message appears:
Device successfully registered.

Unregistering devices from Insight Remote Support central connect

Unregistering an HP ProLiant Gen8 or Gen9 server from Insight Remote Support central connect

Method 1: Using iLO to unregister from Insight Remote Support central connect

Use this procedure to discontinue monitoring of an HP ProLiant server that is registered for Insight Remote Support central connect.

You must have the Configure iLO Settings privilege to modify the remote support settings.

1. Log in to the Insight RS Console.
 2. Do one of the following:
 - To stop monitoring an HP ProLiant server temporarily, select the server on the **Devices→Device Summary** tab in the Insight RS Console, and then select **ACTIONS→DISABLE SELECTED**.
-
- NOTE:** Unregistering the server directly from the iLO web interface is the same as temporarily disabling the server in the Insight RS Console.
-
- To stop monitoring an HP ProLiant server permanently, delete the server from the Insight RS Console. To delete the server, select it on the **Device Summary** tab, and then select **ACTIONS→DELETE SELECTED**.
3. Navigate to the **Remote Support→Registration** page in the iLO web interface.
 4. Verify that the server is unregistered.

Method 2: Using Intelligent Provisioning to unregister from Insight Remote Support central connect

Use this procedure to discontinue monitoring of an HP ProLiant server that is registered for Insight Remote Support central connect.

1. Log in to the Insight RS Console.
 2. Do one of the following:
 - To stop monitoring an HP ProLiant server temporarily, select the server on the **Devices→Device Summary** tab in the Insight RS Console, and then select **ACTIONS→DISABLE SELECTED**.
-
- NOTE:** Unregistering the server directly from Intelligent Provisioning is the same as temporarily disabling the server in the Insight RS Console.
-
- To stop monitoring an HP ProLiant server permanently, delete the server from the Insight RS Console. To delete the server, select it on the **Device Summary** tab, and then select **ACTIONS→DELETE SELECTED**.

3. Navigate to the **Perform Maintenance**→**HP Insight Remote Support** page in Intelligent Provisioning.
4. Verify that the server is unregistered.

Unregistering an HP BladeSystem c-Class enclosure from Insight Remote Support central connect

Use this procedure to discontinue monitoring of an HP BladeSystem c-Class enclosure that is registered for Insight Remote Support central connect.

1. Log in to the Insight RS Console.
2. Do one of the following:
 - To stop monitoring an HP BladeSystem c-Class enclosure temporarily, select the enclosure on the **Devices**→**Device Summary** tab in the Insight RS Console, and then select **ACTIONS**→**DISABLE SELECTED**.
 - To stop monitoring an HP BladeSystem c-Class enclosure permanently, delete the enclosure from the Insight RS Console. To delete the enclosure, select it on the **Device Summary** tab, and then select **ACTIONS**→**DELETE SELECTED**.

NOTE: Disabling or deleting the enclosure from the Insight RS Console does not unregister the enclosure in OA. For OA to be aware that an enclosure has been disabled or deleted, you must use OA to unregister the enclosure from Insight RS.

3. Navigate to the **Enclosure Information**→**Enclosure Settings**→**Remote Support** page in the OA web interface.
4. Click **Unregister**.

The following message appears:

Are you sure you want to un-register and disable HP Insight Remote Support?

5. Click **OK**.

The following message appears:

The enclosure is not registered.

5 Working with service events and collections

You can use iLO and OA to work with service events and collections. These features are not available in the Intelligent Provisioning software.

When a service event occurs, information about the event is sent to HP.

If a service event transmission failure occurs, two additional attempts are made. If the event cannot be sent after three attempts:

HP ProLiant servers

- An SNMP trap (`cpqSm2IrsCommFailure 9020`) is generated.
This SNMP trap is defined in the `cpqsm2.mib` file. For more information, see the *HP iLO 4 User Guide*.
- The failure is logged in the **Service Event Log**.
- The failure is logged in the iLO Event log.
- The service event is recorded in the Active Health System log
- A failure message is recorded in the Active Health System log

HP BladeSystem c-Class enclosures

- The failure is logged in the **Service Event Log**.
- The failure is logged in the OA Syslog.

Sending a test service event

You can send a test service event to verify that your Insight Remote Support configuration is working correctly. The procedure to use depends on the software you will use to initiate the test: iLO or OA.

- [“Sending a test service event by using iLO” \(page 38\)](#)
- [“Sending a test service event by using OA” \(page 39\)](#)

Sending a test service event by using iLO

1. Log in to the iLO web interface (`https://<iLO hostname or IP address>`).
2. Navigate to the **Remote Support**→**Service Events** page.
3. Click **Send Test Event**.

The following message appears:

Are you sure you want to send a test event?

4. Click **OK**.

The following messages appear:

Test Service Event Transmission initiated.

Service Event transmission in progress.

When the transmission is completed, the test event is listed in the **Service Event Log**, the Insight RS Console (central connect only), and Insight Online.

If the test is successful, the **Submit Status** in the **Service Event Log** displays the text `No Error`.

Service Events

Server Maintenance Mode

☐ Set Maintenance Mode Apply

Service Event Test

Send Test Event

Service Event Log

Clear Event Log

Identifier	Time Generated	Event Id	Perceived Severity	Submit Status	Destination	Event Category
00c043ed-8bdf-e211-a6ff-80c16e7d82dc	06/27/13 18:34	1	2	No Error	HPQTEST0001	HPQTEST0001

POWER: ON UID: OFF

The **Time Generated** column in the **Service Event Log** shows the date and time based on the configured iLO time zone.

- For Insight Remote Support central connect only: Check the Insight RS Console to verify that the test event is displayed.

For instructions, see [“Viewing a test service event by using the Insight RS Console \(Insight Remote Support central connect only\)”](#) (page 41).

- Check Insight Online to verify that the test event is displayed.

For instructions, see [“Viewing a test service event by using Insight Online”](#) (page 40).

Sending a test service event by using OA

- Log in to the OA web interface (<https://<OA hostname or IP address>>).
- Navigate to the **Enclosure Settings**→**Remote Support**→**Service Events** page.

Enclosure Settings - ENCLOSURE7 Print Help

Registration **Service Events** **Data Collections**

Service Event Test In progress, please wait ...

Initiate a manual service event test Send Test Event

Maintenance Mode

☐ Enable Maintenance Mode

Expires In: Select ...

Apply

Service Event Log

ID Number	Time Generated	Event Type	Device Type	Serial Number	Bay	Perceived Severity	Submission Status
No Records Found.							

Clear Event Log

3. Click **Send Test Event**.

The following message appears:

Manual service event test completed successfully.

When the transmission is completed, the test event is listed in the **Service Event Log**, the Insight RS Console (Insight Remote Support central connect only), and Insight Online.

The **Time Generated** column in the **Service Event Log** shows the date and time based on the configured OA time zone.

4. For Insight Remote Support central connect only: Check the Insight RS Console to verify that the test event is displayed.

For instructions, see “[Viewing a test service event by using the Insight RS Console \(Insight Remote Support central connect only\)](#)” (page 41).

5. Check Insight Online to verify that the test event is displayed.

For instructions, see “[Viewing a test service event by using Insight Online](#)” (page 40).

Viewing a test service event

You can view a test service event in Insight Online and Insight RS (Insight Remote Support central connect only) to confirm that your Insight Remote Support configuration is working correctly.

- “[Viewing a test service event by using Insight Online](#)” (page 40)
- “[Viewing a test service event by using the Insight RS Console \(Insight Remote Support central connect only\)](#)” (page 41)

Viewing a test service event by using Insight Online

1. Navigate to the following website: <http://www.hp.com/go/InsightOnline>.

The HP Passport **Sign in** page appears.


2. Log in with your HP Passport credentials.
3. Click **Service Events** to view a summary of the recorded service events.

The **All service events** page opens.

Insight Online converts the iLO or OA service event **Time Generated** value to Coordinated Universal Time (UTC).

4. Change the view from **Active** to **Test events** to view the test event sent in “[Sending a test service event](#)” (page 38).

The page refreshes to show only test events.

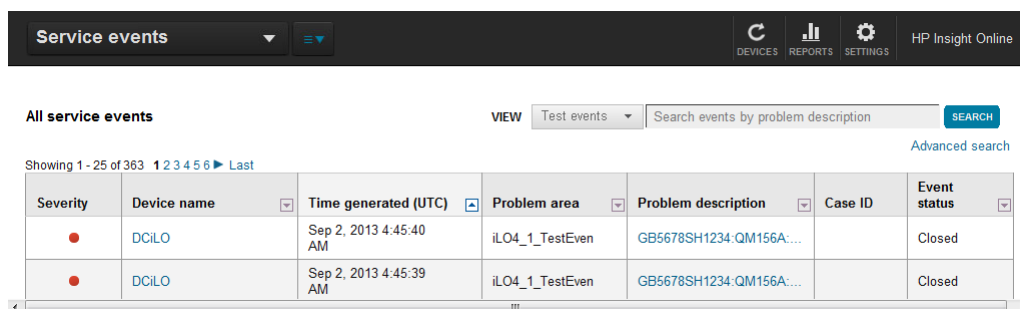

Severity	Device name	Time generated (UTC)	Problem area	Problem description	Case ID	Event status
Error	DCiLO	Sep 2, 2013 4:45:40 AM	iLO4_1_TestEven	GB5678SH1234:QM156A:...		Closed
Error	DCiLO	Sep 2, 2013 4:45:39 AM	iLO4_1_TestEven	GB5678SH1234:QM156A:...		Closed

Test events are closed automatically because no further action is necessary.



TIP: To view activities that occurred after you logged in to Insight Online, click the refresh button (labeled **Devices**).

Viewing a test service event by using the Insight RS Console (Insight Remote Support central connect only)

1. Log in to the Insight RS Console (<https://<Insight RS Hosting Device IP address>:7906>).
2. Navigate to the **Devices** page.
3. Find your server or enclosure, and then click the device name.
4. Click the **Service Events** tab.

The list of service events is displayed.

DeviceService EventsCollectionsCredentials

Show10▼entries

Search:

Severity ▲	Event ID ▼	Date ▼	Problem Area ▼	Problem Description ▼	Case ID ▼	Event Status ▼
▼	98e759b8-af16-48a8-876f-65fc39b8ffb5	Thursday, June 27, 2013 4:34:26 PM	HW	iLO4_1_TestEvent		submitted

Showing 1 to 1 of 1 entries

FirstPrevious1NextLast

Insight RS converts the iLO or OA service event **Time Generated** value to the time zone of the browser used to access the Insight RS Console.

Test events are closed automatically because no further action is necessary.

Sending data collection information

You can send data collection information to HP manually if a device configuration changes and you do not want to wait for the next scheduled data collection transmission. The procedure to use depends on the software you will use to send data collection information: iLO or OA.

- “Sending data collection information by using iLO” (page 41)
- “Sending data collection information by using OA” (page 42)

Sending data collection information by using iLO

Depending on whether you use Insight Online direct connect or Insight Remote Support central connect, iLO or the Insight RS Hosting Device sends server configuration information to HP for analysis and proactive services in accordance with your warranty and service agreements.

- For Insight Online direct connect, this data is transmitted every 30 days. You cannot edit or delete the data collection schedule.
- For Insight Remote Support central connect, the data transmission frequency is configured in the Insight RS Console on the Insight RS Hosting Device. For information about configuring the data collection schedule, see the Insight RS online help.

The **Data Collection Information** section of the **Remote Support**→**Data Collections** page displays the following information:

- **Last Data Collection Transmission**—The date and time of the last data collection.
- **Last Data Collection Transmission Status**—The status of the last data transmission.
- **Data Collection Frequency (days)** (Insight Online direct connect only)—The frequency (in days) at which data is sent to HP.
- **Next Data Collection Scheduled** (Insight Online direct connect only)—The next date and time when data will be sent to HP.

Users with the Configure iLO Settings privilege can send data collection information to HP at any time.

To send data collection information immediately:

1. Log in to the iLO web interface (<https://<iLO hostname or IP address>>).
2. Navigate to the **Remote Support**→**Data Collections** page.

Data Collections

Data Collection Information

iLO sends information about the server configuration to HP on a periodic basis for analysis and proactive services consistent with your warranty and existing service agreements. This information is transmitted every thirty days.

Data Collection Frequency (days):	30
Last Data Collection Transmission:	2013-05-17 09:52
Last Data Collection Transmission Status:	No Error
Next Data Collection Scheduled:	2013-06-16 09:52

[Send Data Collection](#)

Active Health System Reporting Information

iLO provides information on the health, configuration and runtime telemetry of the server. This information is used for troubleshooting issues and closed-loop quality analysis. This information is transmitted every seven days.

Active Health System Reporting Frequency (days):	7
Last Active Health System Reporting Transmission:	-
Last Active Health System Reporting Transmission Status:	No Error
Next Active Health System Reporting Scheduled:	2013-05-24 09:52

[Send Active Health System Report](#)

3. Click **Send Data Collection**.

The following message appears:

Are you sure you want to send a Data Collection?

4. Click **OK**.

The following messages appear:

Data Collection Transmission initiated.

Data Collection Transmission in progress.

When the transmission is completed, the **Last Data Collection Transmission** and **Last Data Collection Transmission Status** are updated. The date and time are based on the configured iLO time zone.

5. Optional: Check the Insight RS Console to verify that the data collection information is displayed.

For instructions, see [“Viewing data collection information in the Insight RS Console \(Insight Remote Support central connect only\)”](#) (page 46).

6. Optional: Check Insight Online to verify that the data collection time stamp is accurate.

For instructions, see [“Viewing data collection information in Insight Online”](#) (page 45).

Sending data collection information by using OA

Depending on whether you use Insight Online direct connect or Insight Remote Support central connect, OA or the Insight RS Hosting Device sends enclosure configuration information to HP for analysis and proactive services in accordance with your warranty and service agreements.


- For Insight Online direct connect, this data is transmitted every 30 days. You cannot edit or delete the data collection schedule.
- For Insight Remote Support central connect, the data transmission frequency is configured in the Insight RS Console on the Insight RS Hosting Device. For information about configuring the data collection schedule, see the Insight RS online help.

The **Data Collection Information** section of the **Enclosure Settings→Remote Support→Data Collections** page displays the following information:

- **Last Data Collection Transmission**—The date and time when data was last sent to HP.
- **Last Data Collection Status**—The status of the last data transmission.
- **Next Scheduled Data Collection** (Insight Online direct connect only)—The next date and time when data will be sent to HP.

To send data collection information immediately:

1. Log in to the OA web interface (<https://<OA hostname or IP address>>).
2. Navigate to the **Enclosure Settings→Remote Support→Data Collections** page.

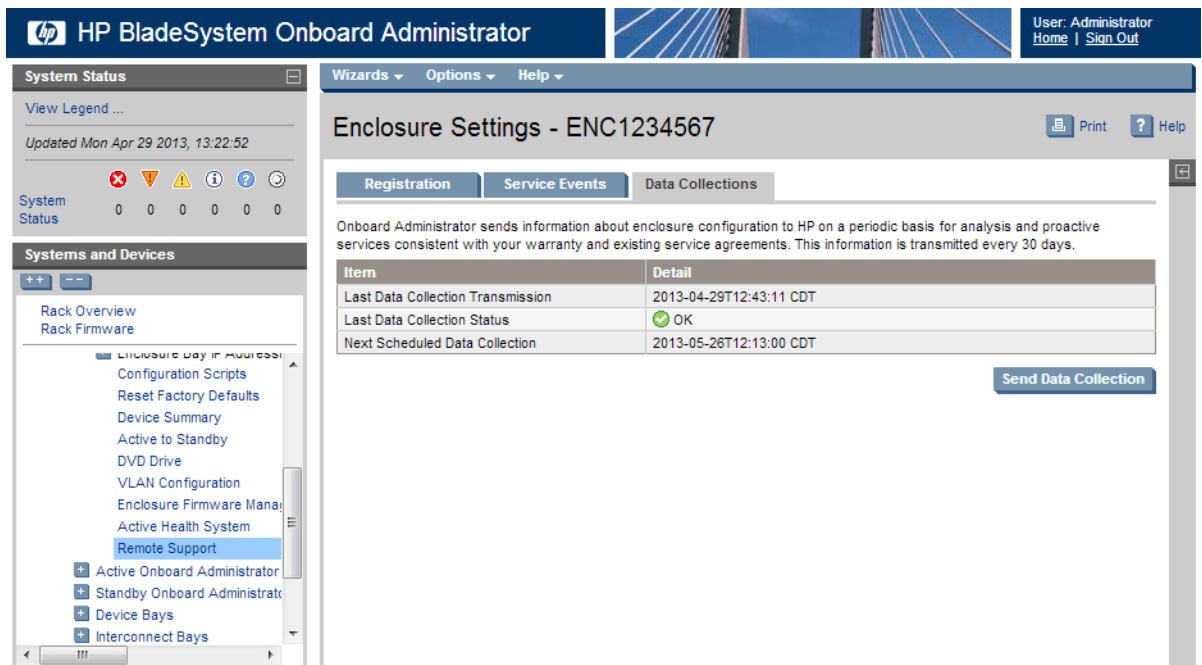

3. Click **Send Data Collection**.

When the transmission is completed, the following message appears:

Manual data collection completed successfully.

The **Last Data Collection Transmission** and **Last Data Collection Status** are updated. The date and time are based on the configured OA time zone.

4. Optional: Check Insight Online to verify that the data collection time stamp is accurate. For instructions, see [“Viewing data collection information in Insight Online”](#) (page 45).
5. Optional: Check the Insight RS Console to verify that the data collection information is displayed.

For instructions, see [“Viewing data collection information in the Insight RS Console \(Insight Remote Support central connect only\)”](#) (page 46).

Sending Active Health System reporting information (HP ProLiant Gen8 and Gen9 servers only)

Depending on whether you use Insight Online direct connect or Insight Remote Support central connect, iLO or the Insight RS Hosting Device sends information about the server's health, configuration, and run-time telemetry to HP. This information is used for troubleshooting issues and closed-loop quality analysis.

Active Health System information is collected for HP ProLiant servers only; it is not collected for HP BladeSystem c-Class enclosures.

- For Insight Online direct connect configurations, this data is transmitted every 7 days. You cannot edit or delete the data collection schedule.
- For Insight Remote Support central connect configurations, this data is transmitted every 7 days. You can change the day of the week for data collection transmission from the Insight RS Console. For information about configuring the data collection schedule, see the Insight RS online help.

The **Active Health System Reporting Information** section on the **Remote Support→Data Collections** page displays the following information:

- **Last Active Health System Reporting Transmission**—The date and time of the last Active Health System report.
- **Last Active Health System Reporting Transmission Status**—The status of the last data transmission.
- **Active Health System Reporting Frequency (days)** (Insight Online direct connect only)—The frequency (in days) at which Active Health System data is sent to HP.
- **Next Active Health System Reporting Scheduled** (Insight Online direct connect only)—The next date and time when Active Health System data will be sent to HP.

Users with the Configure iLO Settings privilege can send Active Health System information to HP at any time.

To send Active Health System information immediately:

1. Log in to the iLO web interface (<https://<iLO hostname or IP address>>).
2. Navigate to the **Remote Support→Data Collections** page.

Data Collections

Data Collection Information

iLO sends information about the server configuration to HP on a periodic basis for analysis and proactive services consistent with your warranty and existing service agreements. This information is transmitted every thirty days.

Data Collection Frequency (days):	30
Last Data Collection Transmission:	2013-05-17 09:52
Last Data Collection Transmission Status:	No Error
Next Data Collection Scheduled:	2013-06-16 09:52

[Send Data Collection](#)

Active Health System Reporting Information

iLO provides information on the health, configuration and runtime telemetry of the server. This information is used for troubleshooting issues and closed-loop quality analysis. This information is transmitted every seven days.

Active Health System Reporting Frequency (days):	7
Last Active Health System Reporting Transmission:	-
Last Active Health System Reporting Transmission Status:	No Error
Next Active Health System Reporting Scheduled:	2013-05-24 09:52

[Send Active Health System Report](#)

3. Click **Send Active Health System Report**.

The following message appears:

Are you sure you want to send an Active Health System report?

4. Click **OK**.

The following messages appear:

Active Health System Transmission initiated.

Active Health System Transmission in progress.

The collected data includes Active Health System information from the last 7 days.

When the transmission is completed, the **Last Active Health System Reporting Transmission** and **Last Active Health System Reporting Transmission Status** are updated. The date and time are based on the configured iLO time zone.

5. Optional: Check the Insight RS Console to verify that the Active Health System information is displayed.

For instructions, see “Viewing data collection information in the Insight RS Console (Insight Remote Support central connect only)” (page 46).

6. Optional: Check Insight Online to verify that the data collection time stamp is accurate.

For instructions, see “Viewing data collection information in Insight Online” (page 45).

Viewing data collection information

You can view data collection information in Insight Online and the Insight RS Console (Insight Remote Support central connect only).

Viewing data collection information in Insight Online


The Insight Online device overview page displays the time stamp of the last data collection transmission or Active Health System transmission (HP ProLiant servers only).

Use this procedure to view the last data transmission time stamp in Insight Online:

1. Log in to the HP Support Center (<http://www.hp.com/go/insightonline>).
2. Navigate to the **Devices** page.
3. Click the name of a device.

The device **OVERVIEW** page opens.

The date and time of the last data collection transmission or Active Health System transmission is listed in the **Configuration** section.

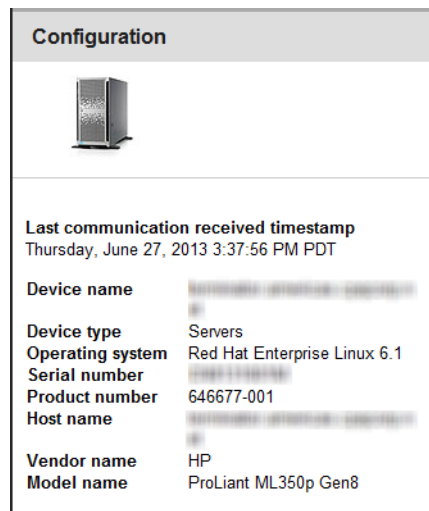


TIP: To view activities that occurred after you signed in to Insight Online, click the refresh button (labeled **Devices**).

Viewing data collection information in the Insight RS Console (Insight Remote Support central connect only)

Use this procedure to view information about server configuration and Active Health System data collection activities.

1. Log in to the Insight RS Console (<https://<Insight RS Hosting Device IP address or FQDN>:7906>).
2. Navigate to the **Devices** page.
3. Find your server or enclosure, and then click the device name.
4. Click the **Collections** tab.

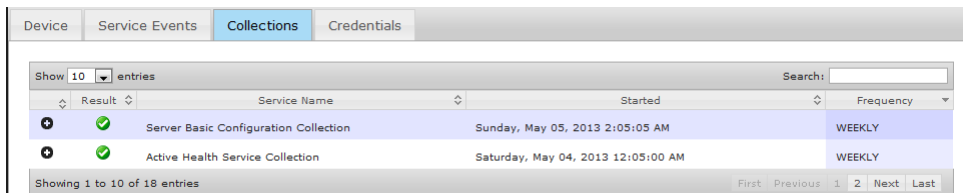

The screenshot shows the 'Collections' tab in the Insight RS Console. At the top, there are four tabs: 'Device', 'Service Events', 'Collections' (which is selected and highlighted in blue), and 'Credentials'. Below the tabs, there is a search bar and a 'Show 10 entries' dropdown. The main content is a table with the following columns: 'Result', 'Service Name', 'Started', and 'Frequency'. There are two rows of data, both with a green checkmark in the 'Result' column. The first row is 'Server Basic Configuration Collection' with a start time of 'Sunday, May 05, 2013 2:05:05 AM' and a frequency of 'WEEKLY'. The second row is 'Active Health Service Collection' with a start time of 'Saturday, May 04, 2013 12:05:00 AM' and a frequency of 'WEEKLY'. At the bottom, there is a pagination bar that says 'Showing 1 to 10 of 18 entries' and includes links for 'First', 'Previous', '1', '2', 'Next', and 'Last'.

Result	Service Name	Started	Frequency
✓	Server Basic Configuration Collection	Sunday, May 05, 2013 2:05:05 AM	WEEKLY
✓	Active Health Service Collection	Saturday, May 04, 2013 12:05:00 AM	WEEKLY

The **Collections** tab displays the following names for data collection information and Active Health System reporting information: **Server Basic Configuration Collection** and **Active Health Service Collection**. Click the plus sign (+) to the left of the **Result** icon to expand a collection. To view additional information or download a collection's associated files, click **More Details**. Insight RS converts the iLO or OA data transmission date and time values to the time zone of the browser used to access the Insight RS Console.

6 Re-registering HP ProLiant Gen8 or Gen9 servers and HP BladeSystem c-Class enclosures

This chapter describes the procedures for re-registering devices that were previously registered for Remote Support. HP supports re-registering devices in the following situations:

- [“Registering an HP ProLiant Gen8 or Gen9 server used as a Hosting Device for Insight Online direct connect” \(page 47\)](#)
- [“Changing an HP ProLiant Gen8 or Gen9 server or HP BladeSystem c-Class enclosure from central connect to direct connect” \(page 48\)](#)
- [“Changing an HP ProLiant Gen8 or Gen9 server or HP BladeSystem c-Class enclosure from direct connect to central connect” \(page 48\)](#)

Registering an HP ProLiant Gen8 or Gen9 server used as a Hosting Device for Insight Online direct connect

HP does not support Insight Online direct connect registration of an HP ProLiant server that is used as an Insight RS or Insight Remote Support Advanced Hosting Device. If you register an active Hosting Device for Insight Online direct connect, all of the devices that are monitored by that Hosting Device will be unable to communicate with HP to receive remote support.

Use this procedure to stop using an HP ProLiant server as a Hosting Device, unregister the server from Insight Remote Support central connect, and then register the server for Insight Online direct connect.

1. Optional: If you plan to configure a new Hosting Device to monitor the devices that were monitored by the Insight Remote Support Console on the HP ProLiant server, export a Bulk CSV file containing the list of monitored devices.
For more information, see the [HP Insight Remote Support Installation and Configuration Guide](#) or the [HP Insight Remote Support Advanced Central Management Server Configuration Guide](#).
2. Unregister the monitored devices from the Insight RS Hosting Device on the HP ProLiant server.
For instructions, see the [HP Insight Remote Support Monitored Devices Configuration Guide](#).
3. Unregister the HP ProLiant server Hosting Device from Insight RS.
For instructions, see [“Method 1: Using iLO to unregister from Insight Remote Support central connect” \(page 36\)](#) or [“Method 2: Using Intelligent Provisioning to unregister from Insight Remote Support central connect” \(page 36\)](#).
4. Uninstall Insight RS from the HP ProLiant server.
5. Use iLO or Intelligent Provisioning to register the HP ProLiant server for Insight Online direct connect.
For instructions, see [“Registering devices for Insight Online direct connect” \(page 14\)](#).
6. Optional: Install Insight RS or Insight Remote Support Advanced on a different server, and then configure a new Hosting Device.
For more information, see the [HP Insight Remote Support Installation and Configuration Guide](#) or the [Insight Remote Support Advanced Central Management Server Configuration Guide](#).
7. Optional: Import the Bulk CSV file into Insight RS on the new Hosting Device.
For more information, see the [HP Insight Remote Support Installation and Configuration Guide](#) or the [Insight Remote Support Advanced Central Management Server Configuration Guide](#).

Changing the remote support configuration of an HP ProLiant Gen8 or Gen9 server or HP BladeSystem c-Class enclosure

HP does not support registering an HP ProLiant server or HP BladeSystem c-Class enclosure for Insight Remote Support central connect and Insight Online direct connect at the same time. If you register a device using both configurations, it will have two communication paths to HP and Insight Online. Device information might be overwritten each time data is sent to HP.

Changing an HP ProLiant Gen8 or Gen9 server or HP BladeSystem c-Class enclosure from central connect to direct connect

If you registered a device by using the Insight Remote Support central connect configuration, and you want to re-register the device by using the Insight Online direct connect configuration, use the following procedure:

1. Unregister the device from the Insight Remote Support central connect.

For instructions, see [“Unregistering devices from Insight Remote Support central connect”](#) (page 36).

If iLO or OA and the Insight RS Hosting Device use different time zones, and iLO or OA uses an earlier time zone than the Insight RS Hosting Device, do not re-register the device until the iLO or OA time is the same as or later than the time at which you unregistered the device from Insight Remote Support central connect. For example, you might have an Insight RS Hosting Device set to the local time in Paris, France, and an iLO or OA set to the local time in California. If you unregister the device from Insight Remote Support central connect at 5 p.m. local time in Paris, France, you must wait until 5 p.m. Pacific time to register the device for Insight Online direct connect. If you do not wait, the re-registered device will not be displayed in Insight Online.

2. Register the device for Insight Online direct connect, as described in [“Registering devices for Insight Online direct connect”](#) (page 14).

Changing an HP ProLiant Gen8 or Gen9 server or HP BladeSystem c-Class enclosure from direct connect to central connect

If you registered a device by using the Insight Online direct connect configuration, and you want to re-register the device by using the Insight Remote Support central connect configuration, use the following procedure:

1. Unregister the device from Insight Online direct connect.

For instructions, see [“Unregistering devices from Insight Online direct connect”](#) (page 28).

If iLO or OA and the Insight RS Hosting Device use different time zones, and the Insight RS Hosting Device uses an earlier time zone than iLO or OA, do not re-register the device until the Insight RS Hosting Device time is the same as or later than the time at which you unregistered the device from Insight Online direct connect. For example, you might have iLO or OA set to the local time in Paris, France, and a Hosting Device set to the local time in California. If you unregister the device from Insight Online direct connect at 5 p.m. local time in Paris, France, you must wait until 5 p.m. Pacific time to register the device for Insight Remote Support central connect. If you do not wait, the re-registered device will not be displayed in Insight Online.

2. Register the device for Insight Remote Support central connect, as described in [“Registering devices for Insight Remote Support central connect”](#) (page 30).

7 Troubleshooting

General issues

HP ProLiant Gen8 or Gen9 server identified in Insight Online as <product name>_<serial number> and in Insight RS as <serial number>

Issue: If a server is registered for Insight Remote Support before iLO discovers the server name, Insight Online assigns a server name in the format <product name>_<serial number>, and Insight RS identifies the server by its serial number.

Solution: Use the following procedure to display a user-friendly server name in Insight Online and the Insight RS Console:

1. Do one of the following:
 - Verify that AMS is enabled and the operating system is running.
 - Update the **Server Name** on the **Administration**→**Access Settings** page in the iLO web interface.
 - For Windows systems only, start the operating system. Insight Online and Insight RS will use the Windows computer name to identify the server.
2. For Insight Remote Support central connect only: Depending on your configuration, do one of the following:
 - For configurations with iLO firmware 1.30 or later, no additional action is required. iLO automatically detects the server name and forwards it to Insight RS and Insight Online for display.
 - HP ProLiant Gen8 servers only: For configurations with iLO firmware versions earlier than 1.30, the server name is updated automatically the next time data collection information is transmitted. Data collection occurs every 30 days and can be initiated immediately from the **Remote Support**→**Data Collections** page in the iLO web interface. For instructions, see [“Sending data collection information by using iLO”](#) (page 41).
3. If you were logged in to Insight Online when you performed [Step 1](#), click the refresh button (labeled **Devices**) to update the Insight Online view with the server information.

HP ProLiant Gen8 or Gen9 server operating system name and version not listed in Insight RS or Insight Online

Issue: If a server is registered for Remote Support when the operating system and AMS are not running (for example, during an Intelligent Provisioning registration), iLO is unable to determine which operating system is installed. To update the Insight RS and Insight Online operating system information, iLO must acquire the operating system information from AMS.

Solution: Use the following procedure:

1. Verify the following:
 - For HP ProLiant Gen8 servers: iLO firmware 1.20 or later (Insight Remote Support central connect) or 1.40 or later (Insight Online direct connect) is installed.
 - For HP ProLiant Gen9 servers: iLO firmware 2.00 or later is installed.
 - AMS is enabled and the operating system is running.
 - For Insight Remote Support central connect only: Verify that a supported version of Insight RS is installed on the Hosting Device. For more information, see http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/insight_rs.aspx.
 - For Insight Remote Support central connect only: Verify that the RIBCL credentials for the server have been entered in the Insight RS Console and are associated with the HP ProLiant server.
2. Initiate the data collection process from the **Remote Support**→**Data Collections** page in the iLO web interface. For instructions, see “[Sending data collection information by using iLO](#)” (page 41). The operating system name and version are forwarded to Insight RS and Insight Online during the data collection process.
3. If you were logged in to Insight Online when you performed [Step 2](#), click the refresh button (labeled **Devices**) to update the Insight Online view with the server information.

When using Insight Online, the operating system name and version are listed on the **Device Configuration Details** page if AMS is installed and the operating system was running during the most recent data collection transmission.

HP ProLiant Gen8 or Gen9 server registered for both central connect and direct connect remote support

Issue: HP does not support registering an HP ProLiant server for Insight Remote Support Advanced or Insight Remote Support central connect and Insight Online direct connect at the same time. If you register a device using both configurations, it will have two communication paths to HP and Insight Online. Device information might be overwritten each time data is sent to HP.

Solution 1: To continue using Insight Remote Support central connect or Insight Remote Support Advanced, unregister the server from Insight Online direct connect, and then rediscover the server on the Insight RS Hosting Device. For instructions, see “[Unregistering devices from Insight Online direct connect](#)” (page 28) and the *HP Insight Remote Support Monitored Devices Configuration Guide*.

Solution 2: To continue using Insight Online direct connect, unregister the server from Insight Remote Support central connect or Insight Remote Support Advanced, as described in “[Unregistering devices from Insight Remote Support central connect](#)” (page 36).

iLO firmware update does not finish

Issue: An iLO firmware update remains at 1% complete and does not finish.

Solution: Reset iLO, and then retry the firmware update.

1. Install the HP Lights-Out Online Configuration Utility (HPONCFG) on the HP ProLiant server. You can download HPONCFG from the following website: <http://www.hp.com/support/ilo4>.
2. Open a command window.
3. Change to the directory that contains HPONCFG.
4. Enter the following command:
 - Windows: `hponcfg /reset`
 - Linux: `hponcfg -r`

NOTE: The user credentials are not required when you use HPONCFG from the server operating system.

5. Retry the iLO firmware update.



TIP: For information about using HPONCFG, see the *HP iLO 4 Scripting and Command Line Guide*.

For information about other methods you can use to reset iLO, see the *HP iLO 4 User Guide* and the *HP iLO 4 Scripting and Command Line Guide*.

Operating system information displayed incorrectly in Insight Online

Issue: Operating system information is displayed at the top of a device page, but in the device **Configuration** section, it is listed as **Unknown**.

Solution: Click the refresh button (labeled **Devices**).


Certificate error when navigating to iLO web interface

Issue: When you navigate to the iLO web interface, a certificate error appears.

Solution: Use one of the following procedures to resolve the error.

Resolving a browser certificate error: Internet Explorer

1. Click the **Continue to this website (not recommended)** link.

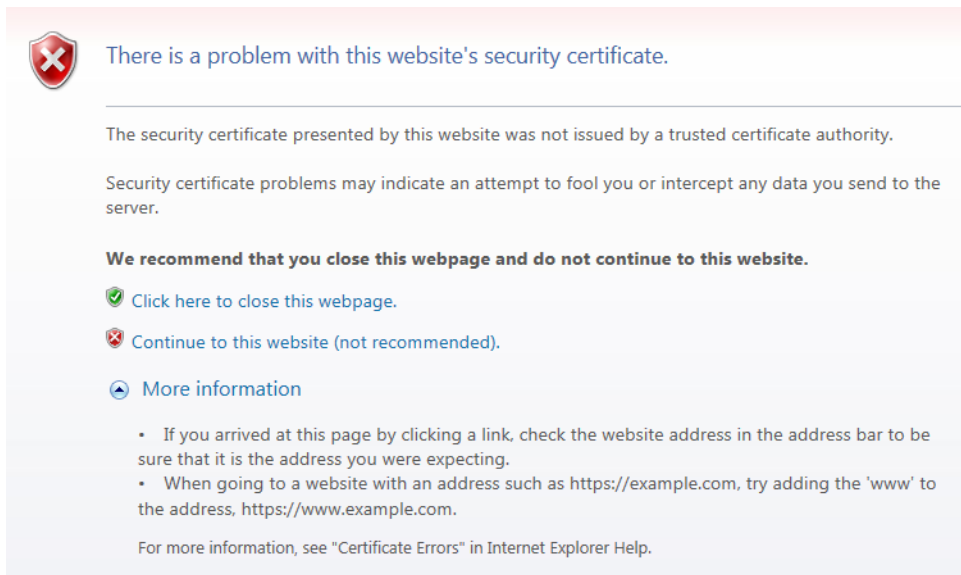

2. Log in to the iLO web interface.
3. Navigate to the **Administration**→**Security**→**SSL Certificate** page.
4. Click **Customize Certificate**.

The **SSL Certificate Customization** page opens.

5. On the **SSL Certificate Customization** page, enter the following information in the **Certificate Signing Request (CSR) Information** section. The required boxes are marked with an asterisk (*).
 - **Country (C)**—The two-character country code that identifies the country where the company or organization that owns this iLO system is located.
 - **State (ST)**—The state where the company or organization that owns this iLO system is located.
 - **City or Locality (L)**—The city or locality where the company or organization that owns this iLO system is located.
 - **Organization Name (O)**—The name of the company or organization that owns this iLO system.
 - **Organizational Unit (OU)**—(Optional) The unit within the company or organization that owns this iLO system.
 - **Common Name (CN)**—The FQDN of this iLO system.
6. Click **Generate CSR**.

The following message is displayed:

The iLO subsystem is currently generating a Certificate Signing Request (CSR). This may take 10 minutes or more. In order to view the CSR, wait 10 minutes or more, and then click the Generate CSR button again.
7. After 10 minutes or more, click **Generate CSR**.


A new window displays the CSR.
8. Select and copy the CSR text.
9. Open a browser window and navigate to a third-party CA.
10. Follow the onscreen instructions and submit the CSR to the CA.

The CA will generate a certificate in the PKCS #10 format.
11. After you obtain the certificate, verify the following:
 - The CN matches the iLO FQDN. This is listed as the **iLO Hostname** on the **Information**→**Overview** page.
 - The certificate is generated as a Base64-encoded X.509 certificate, and is in the RAW format.
 - The first and last lines are included in the certificate.
12. Return to the **SSL Certificate Customization** page in the iLO web interface.
13. Click **Import Certificate**.


The **Import Certificate** window opens.
14. Paste the certificate into the text box, and then click **Import**.
15. Restart iLO.

Resolving a browser certificate error: Firefox

1. Click the **I Understand the Risks** link to expand the section, and then click **Add Exception**.

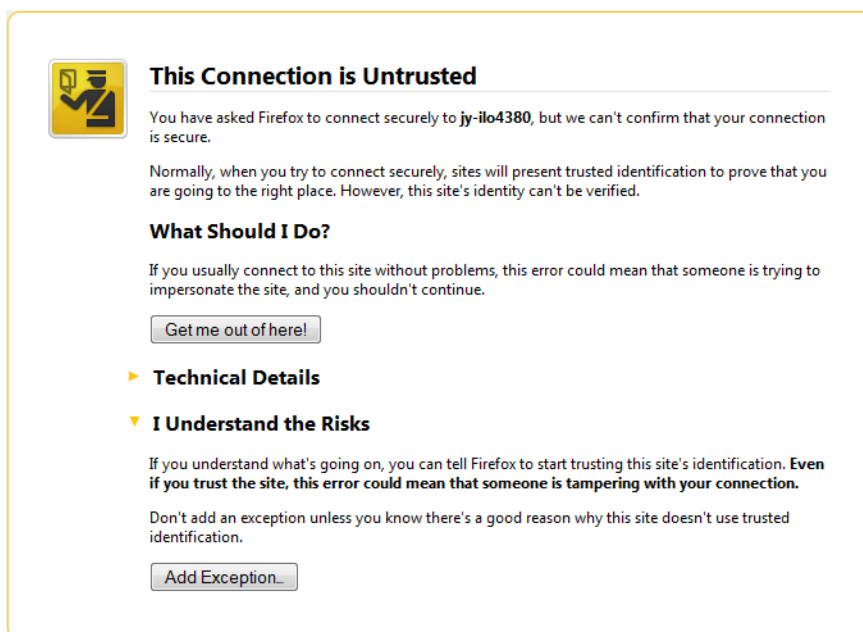


2. In the **Add Security Exception** dialog box, enter `https://<iLO hostname or IP address>` in the **Location** box.

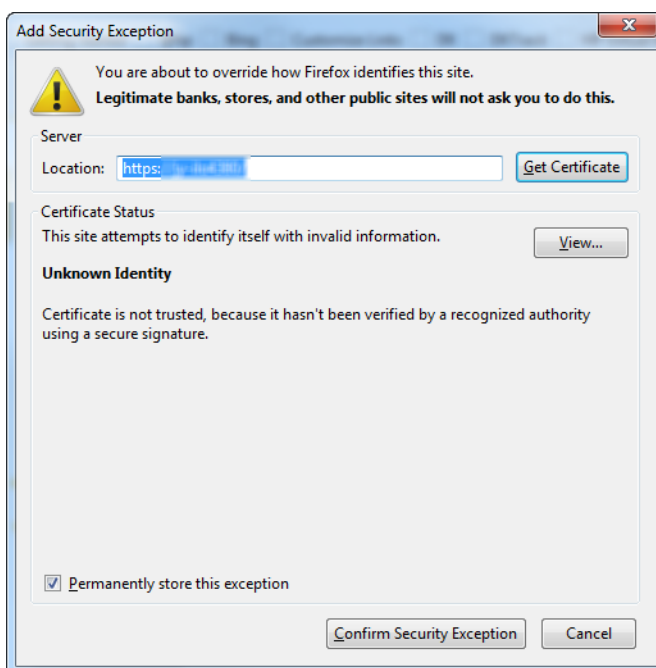

3. Click **Confirm Security Exception** to resolve the security warning.
The security exception is saved and the iLO login screen appears.
4. Log in to iLO.

Resolving a browser certificate error: Chrome

1. When the security warning appears, click **Proceed anyway**.

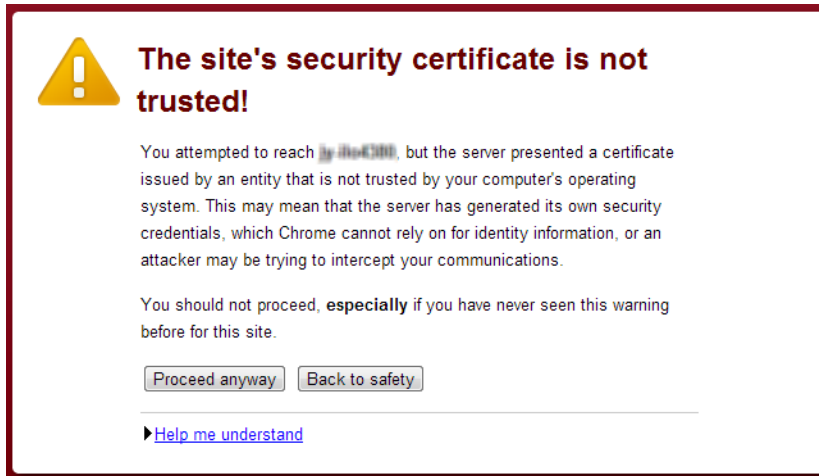

2. Log in to iLO.
3. Optional: To prevent the certificate warning from appearing in future iLO web interface sessions, install an SSL certificate.

For instructions, perform Step 3 through Step 15 in “[Resolving a browser certificate error: Internet Explorer](#)” (page 51).

Insight Online direct connect

Connection error during iLO Insight Online direct connect registration

Issue: The following error occurs when you try to register an HP ProLiant server for Insight Online direct connect: Cannot connect to remote host.

Solution: Verify that DNS information is configured in iLO.

For instructions, see the *HP iLO 4 User Guide*.

Connection error during OA Insight Online direct connect registration

Issue: The following error occurs when you try to register an HP BladeSystem c-Class enclosure for Insight Online direct connect:

Failed to resolve HP Insight Remote Support direct connect web service.
Please verify DNS settings, proxy settings and connectivity.

Solution 1: Verify that the DNS settings are configured correctly in OA. You can use the OA web interface or CLI to perform this task.

- Log in to the OA web interface and navigate to the **Active Onboard Administrator**→**TCP/IP Settings** page. Verify that the DNS configuration is correct. To edit the configuration, click the **Click here to modify the TCP/IP settings** link at the bottom of the screen.
- Log in to the OA CLI and execute the `SHOW NETWORK` command. Verify that the DNS configuration is correct. To edit the configuration, use the `ADD OA DNS` command.

Solution 2: Verify that the web proxy settings are configured correctly in OA.

For more information, see “[Editing the web proxy settings](#)” (page 24).

Solution 3: Verify that your configuration meets the network requirements for Insight Online direct connect.

For more information, see “[Insight Online direct connect network requirements](#)” (page 14).

iLO session ends unexpectedly during iLO Insight Online direct connect registration

Issue: The iLO web interface session ends unexpectedly with the error `Session Expired` when you try to register an HP ProLiant server for Insight Online direct connect.

Solution: Verify that the DNS settings are configured correctly in iLO. Depending on your network configuration, you can view and change these settings on the following iLO web interface pages:

- **Network**→**iLO Dedicated Network Port**→**IPv4**
- **Network**→**iLO Dedicated Network Port**→**IPv6**
- **Network**→**Shared Network Port**→**IPv4**
- **Network**→**Shared Network Port**→**IPv6**

For more information, see the *HP iLO 4 User Guide*.

System board replaced on a server that was registered for Insight Online direct connect

Issue: A server that was registered for Insight Online direct connect had the system board replaced.

Solution: Re-register the server as follows:

1. Use the system RBSU or UEFI System Utilities to program the system product number and serial number in the SMBIOS.

For more information, see the *HP ROM-Based Setup Utility User Guide* (for servers with the system RBSU) or the *HP UEFI System Utilities User Guide* (for servers with the UEFI System Utilities).

2. Register the server as if it were a new Remote Support registration.

For more information, see [“Registering devices for Insight Online direct connect”](#) (page 14).

Insight Remote Support central connect

Duplicate records created in Insight Online when the same device is discovered twice

Issue: Two records for a device might be created in Insight Online in the following cases:

- **Case 1:** A device is partially discovered by Insight RS, which detects operating system and network information, but not serial number or product number information. When Insight RS rediscovers the device, it obtains all information.
- **Case 2:** A device has SNMP trap forwarding set to the Hosting Device. The device was not discovered by Insight RS before the Hosting Device received an event.

Solution: None. Duplicate records cannot be removed at this time.

SSL Bio Error during Insight RS registration

Issue: The following error occurs when you try to register an HP ProLiant server with Insight RS:
`SSL Bio Error`.

Solution: Navigate to the **Information**→**Diagnostics** page in the iLO web interface, and then click **Reset iLO**. When the reset is finished, log in to the iLO web interface and retry the registration procedure.

Clicking **Reset iLO** does not make any configuration changes, but it terminates any active connections to iLO and completes any firmware updates in progress. You must have the Configure iLO Settings privilege to reset iLO on the **Diagnostics** page.

Device warranty is incorrectly listed as expired in Insight RS

Issue: A device with a valid warranty is listed as expired in Insight RS.

Solution 1: Verify that you entered valid information on the **Site Information** page of the Insight RS Hosting Device Setup Wizard.

Solution 2: Update your HP Passport account to include a Country/Region.

Credentials are missing after synchronizing Insight RS with HP SIM

Issue: After Insight RS and HP SIM are synchronized, the credentials for a monitored device are missing.

Solution: Verify that the credentials are valid on the device that is being synchronized. Make sure HP SIM has validated the credential set and has successfully identified the device with the provided credentials. For more information, see the *HP Systems Insight Manager User Guide*.

Service events and collections display an incorrect time stamp in the Insight RS Console

When you view service events and collections in the Insight RS Console, any displayed time is converted to the time zone set in the browser. This ensures that users can see the event timing using their local time zone.

Issue: There are discrepancies between the event time and the event processed time.

Solution: Check the time and time zone setting on the monitored device. If the time zone is set using a time server or DHCP, verify that the time server or DHCP is correctly configured and set to the appropriate time.

This issue does not affect service delivery by HP or an HP Authorized Service Partner because the Hosting Device time is used as a reference.

Certificate error when navigating to Insight RS Console

Issue: When you navigate to the Insight RS Console, a certificate error appears.

Solution: Use one of the following procedures to resolve the error.

Internet Explorer

1. Click the **Continue to this website (not recommended)** link.
2. In the address bar, click **Certificate Error**, and then click **View certificates**.
3. In the **Certificate** dialog box, click **Install Certificate**.
4. In the **Certificate Import Wizard**, click **Next**.
5. Select the **Place all certificates in the following store** option.
6. Click **Browse**, select **Trusted Root Certification Authorities**, and then click **OK**.
7. Click **Next**, and then click **Finish**.
8. Click **Yes** in the **Security Warning** dialog box to confirm the certificate installation.

Firefox

1. Click the **I Understand the Risks** link to expand the section, and then click **Add Exception**.
2. In the **Add Security Exception** dialog box, enter `https://<Insight RS Hosting Device hostname>:7906/` in the **Location** box.
3. Click **Confirm Security Exception** to resolve the security warning.

Chrome

1. Click **Proceed anyway**, click the lock with the red X icon in the menu bar, and then click **Certificate information**.
2. In the **Certificate** dialog box, click the **Details** tab, and then click **Copy to File**.
The Certificate Export Wizard appears.
3. Proceed through the wizard and save the certificate. Then, click **OK** to close the **Certificate** dialog box.

4. Use the Microsoft Management Console to import the certificate as a trusted root certificate.
 - a. On the **Start** menu, select **Run**, enter **mmc**, and then click **OK**.

The Microsoft Management Console displays an empty console.
 - b. From the console, select **File→Add/Remove Snap-in**.
 - c. In the **Available snap-ins** pane, select **Certificates** and click **Add**.
 - d. In the **Certificates snap-in** dialog box, select how you want to manage certificates, click **Finish**, and then click **OK**.
 - e. In the left menu, select **Trusted Root Certification Authorities**. In the **Object Type** pane, right-click **Certificates** and select **All Tasks→Import**.
 - f. In the Certificate Import Wizard, import the saved certificate. Place the certificate in the **Trusted Root Certification Authorities** store.
 - g. Click **Finish**.

8 Support and other resources

HP support information

HP recommends that you consult the Insight Remote Support documentation to resolve issues. The documentation is designed to help guide you through a successful installation and configuration. However, if you need further support for Insight Remote Support, help is available through HP's local Response Centers. For contact details, see <http://www.hp.com/go/rstechsupport>.

For information about using HP ProLiant servers with Community and Regional Linux distributions, see the HP website at <http://www.hp.com/go/communitylinux>.

Related documents

- *HP Insight Remote Support Release Notes*
- *HP Insight Remote Support Quick Installation Guide*
- *HP Insight Remote Support Installation and Configuration Guide*
- *HP Insight Remote Support Monitored Devices Configuration Guide*
- *HP Insight Remote Support Security White Paper*
- *HP Insight Remote Support Upgrade Guide*
- *HP Insight Online User's Guide*
- *HP Insight Online Reporting Guide*
- *HP iLO 4 User Guide*
- *HP iLO 4 Scripting and Command Line Guide*
- *HP iLO 4 Release Notes*
- *HP Service Pack for ProLiant User Guide*
- *HP BladeSystem Onboard Administrator User Guide*
- *HP BladeSystem Onboard Administrator Command Line Interface User Guide*
- *HP Systems Insight Manager User Guide*
- *HP Intelligent Provisioning User Guide*

You can download these documents from the following websites:

- HP ProLiant Gen8 Server Management: <http://www.hp.com/go/proliantgen8/docs>
- HP ProLiant Gen9 Server Management: <http://www.hp.com/support/proliantgen9/docs>
- HP iLO Management Engine: <http://www.hp.com/go/ilomgmtengine/docs>
- HP Insight Remote Support: <http://www.hp.com/go/insightremotesupport/docs>
- HP SPP: <http://www.hp.com/go/hpsum/documentation>
- HP iLO 4: <http://www.hp.com/go/ilo/docs>
- HP Onboard Administrator: <http://www.hp.com/go/oa>
- HP SIM: <http://www.hp.com/go/hpsim>
- HP Intelligent Provisioning: <http://www.hp.com/go/intelligentprovisioning/docs>

A Using Agentless Management and the Agentless Management Service

With iLO 3 and earlier, SNMP management used the HP Insight Management Agents running on the server operating system. With iLO 4, you can use either Agentless Management or the Insight Management Agents. The default configuration uses Agentless Management.

iLO 4 Agentless Management uses out-of-band communication for increased security and stability. With Agentless Management, health monitoring and alerting is built into the system and begins working the moment a power cord is connected to the server. This feature runs on the iLO hardware, independent of the operating system and processor. Additional operating system data is collected when AMS is installed.

Table 4 (page 59) provides a comparison of the information provided by the HP ProLiant server configurations.

Table 4 Information provided by Agentless Management and Insight Management Agents

Component	Agentless Management without AMS ¹	Agentless Management with AMS ¹	Insight Management Agents ¹
Server health	- Fans - Temperatures - Power supplies - Memory - CPU - Gen9 only: Smart Storage battery monitoring	- Fans - Temperatures - Power supplies - Memory - CPU - Gen9 only: Smart Storage battery monitoring	- Fans - Temperatures - Power supplies - Memory - CPU
Storage	- Smart Array - SMART Drive Monitoring (connected to Smart Array) - Internal and external drives connected to Smart Array	- Smart Array - iSCSI SAS/SATA HBA² - SMART Drive Monitoring (connected to Smart Array and SAS HBA) - Internal and external drives connected to Smart Array	- Smart Array - SAS/SATA HBA/RAID - Fibre Channel/iSCSI - SMART Drive Monitoring (connected to Smart Array and SAS HBA) - Tape - External storage
NIC	MAC addresses for embedded NICs	- MAC and IP address for standup and embedded NICs - Link up/link down traps²	- MAC and IP addresses for standup and embedded NICs - Teaming information - Link up/link down traps - VLAN information
Other	- iLO data - Firmware inventory	- iLO data - OS information (host MIB)² - Firmware inventory - Driver/service inventory - Logging events to OS logs³	- OS information (host MIB) - iLO data - Performance data - User-configurable thresholds - Logging events to OS logs - Clustering information
Pre-failure warranty alerts	- Memory - Drives (physical and logical)	- Memory - Drives (physical and logical)	- Memory - Drives (physical and logical) - CPU

¹ The **Agentless Management without AMS** column represents the basic iLO configuration without AMS or the Insight Management Agents. HP ProLiant Gen8 and Gen9 server configurations with AMS or the Insight Management Agents provide the same information as the basic iLO configuration, as well as the information that is listed in the **Agentless Management with AMS** and **Insight Management Agents** columns.

² The data supplied by Agentless Management is not as extensive as the data supplied by the SNMP agents.

³ iLO 4 1.10 and later supports AMS-based OS logging for Linux (var/message/log), Solaris, and VMware.

Verifying AMS installation

Use the procedures in this section to verify the AMS installation.

Verifying AMS installation: Windows

To verify that AMS is enabled on a Windows system:

1. Open the Windows Control Panel.

If the Agentless Management Service Control Panel is present, then AMS is installed.

2. Open the Agentless Management Service Control Panel.
3. Click the **Service** tab.

If AMS is enabled, the following message appears:

Agentless Management Service (AMS) is enabled.

Verifying AMS installation: SUSE and Red Hat

To verify that AMS is installed on a SUSE or Red Hat system, enter the following command:

```
rpm -qi hp-ams
```

To verify that AMS is running on a SUSE or Red Hat system, enter the following command:

```
service hp-ams status
```

Verifying AMS installation: VMware

To verify that AMS is installed on a VMware system:

1. Access the VMware host from the VMware vSphere Client.
2. Navigate to the server's **Inventory**→**Configuration**→**Health Status** tab.
3. Click the plus sign (+) next to **Software Components**.

The software installed on the host is listed. The AMS component includes the string `hp-ams`.

NOTE: The full name of the AMS component is different for each supported version of ESX/ESXi.

To verify that AMS is running on a VMware system, enter the following command:

```
service hp-ams status
```

Verifying AMS installation: Ubuntu

To verify that AMS is installed on an Ubuntu system, enter the following command:

```
dpkg -l hp-ams
```

To verify that AMS is running on an Ubuntu system, enter the following command:

```
sudo service hp-ams status
```

B Verifying HP ProLiant iLO 3/4 driver installation (HP ProLiant Gen8 and Gen9 servers only)

This solution requires installation of the HP ProLiant iLO 3/4 Channel Interface Driver. This driver is installed automatically if you use the Intelligent Provisioning **Recommended** installation method.

Verifying driver installation: Windows

1. Navigate to **Device Manager**→**System Management**.
2. Verify that the following items are installed:
 - HP ProLiant iLO 4 Management Controller (CHIF)
 - HP ProLiant iLO 4 Management Controller (CORE)

Verifying driver installation: Linux, VMware, and Ubuntu

1. Open a Terminal window.
2. Enter the command `lsmod`.
3. Verify that the `hpilo` module is running.

C Service events

Table 5 (page 62) lists the possible service events for HP ProLiant servers.

Table 5 ProLiant Gen8 and Gen9 server service events

Event ID	Description
1	Generic Test Service Event
100	Fan Failed Service Event
200	Power Supply Failed Service Event
300	Physical Disk Drive Service Event
301	Smart Array Controller Accelerator Battery Failure Event
302	Smart Array Controller Accelerator Board Status Changed Event
303	Smart Array Controller Status Changed Event
400	Memory Module Failed or Predicted to Fail Event

Table 6 (page 62) lists the possible service events for HP BladeSystem c-Class enclosures.

Table 6 HP BladeSystem c-Class enclosure service events

Event type	Device type	Description
System	Fan	The fan module has a FAILED status with a severity status of CRITICAL. The device has failed.
System	Onboard Administrator	The OA module has a DEGRADED status with a severity status of WARNING MINOR. There was an error when reading the FRU information on the OA module.
System	Onboard Administrator	The OA module has a DEGRADED status with a severity status of WARNING MINOR.
System	Onboard Administrator	The OA module has a DEGRADED status with a severity status of WARNING MINOR. Use the OA logs to determine the cause (unrecognized error).
System	Interconnect	The Interconnect module has a DEGRADED status with a severity status of WARNING MINOR. There was an error when reading the FRU information on the Interconnect module.
System	Interconnect	The Interconnect module has a DEGRADED status with a severity status of WARNING MINOR.
System	Interconnect	The Interconnect module has a DEGRADED status with a severity status of WARNING MINOR. Use the OA logs to determine the cause (unrecognized error).
System	Interconnect	The Interconnect module has a FAILED status with a severity status of CRITICAL. It is in a thermal danger state.
System	Power Supply	The power supply has a DEGRADED status with a severity status of WARNING MINOR. There was an error when reading FRU information on the power supply module.
System	Power Supply	The power supply has a DEGRADED status with a severity status of WARNING MINOR.
System	Power Supply	The power supply has a DEGRADED status with a severity status of WARNING MINOR. Use the OA logs to determine the cause (unrecognized error).
System	Power Supply	The power supply has a FAILED status with a severity status of CRITICAL.

Table 6 HP BladeSystem c-Class enclosure service events *(continued)*

Event type	Device type	Description
System	Power Supply	The power supply has a FAILED status with a severity status of CRITICAL. The device has failed.
Test	Enclosure	Test event

D Configuring the Hosting Device

Running the Hosting Device Setup Wizard

To configure the Hosting Device:

1. Verify that your system meets the prerequisites for configuring the Hosting Device.
 - Insight RS is installed on the server you will configure as the Hosting Device.
You can download Insight RS from HP Software Depot at the following website: <http://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=REMOTESUPPORT>.
For installation instructions, see the *HP Insight Remote Support Installation and Configuration Guide*.
 - Optional: If you want to use HP SIM with Insight RS, HP SIM is installed on the server you will configure as the Hosting Device.
You can download HP SIM from the following website: <http://www.hp.com/go/hpsim>.
For installation instructions, see the *HP SIM Installation and Configuration Guide*.
 - You have an HP Passport account.
 - The following information is available:
 - Your contact information.
 - Your site information (site name, address, and time zone).
 - Web proxy information (if you use a web proxy to access the Internet).
 - HP Passport account information.
 - Channel Partner IDs for your authorized service provider, reseller/distributor, and installer (if you want to allow Channel Partners to view your device information).

2. Log in to the Insight RS Console (<https://<Insight RS Hosting Device IP address or FQDN>:7906>).

You must log in as an Administrator or as a user that is a direct member of the Hosting Device's Administrators Group.

 **TIP:** If you are accessing Insight RS from the Hosting Device, you can double-click the Insight Remote Support icon on the Desktop to access the Insight RS Console.

When you navigate to the Insight RS Console, a certificate error message appears if you have not already installed a certificate (Internet Explorer and Chrome) or added an exception (Firefox). This message appears because your browser is not yet configured to trust the Insight RS Console web page.

3. If a certificate error message appears, do one of the following:
 - **Internet Explorer**—Click **Continue to this website (not recommended)** to continue to the Insight RS Console.
 - **Chrome**—Click **Proceed anyway** to continue to the Insight RS Console.
 - **Firefox**—Click **I Understand the Risks**, and then click **Add Exception**. Enter <https://<Insight RS Hosting Device IP address or FQDN>:7906/> in the **Location** box, and then click **Confirm Security Exception**.

You can run the Hosting Device Setup Wizard and use Insight RS without importing a certificate. For information about configuring your browser so you will not receive a certificate error message, see [“Certificate error when navigating to Insight RS Console”](#) (page 56).

4. Start the Hosting Device Setup Wizard from the **HP Insight Remote Support Setup Wizards** page.
The **Introduction** page opens.
5. Click **Next**.
The **Receiving Remote Support** page opens.
6. Configure the following options, and then click **Next**:
 - **CHOOSING TO OPTIMIZE MY ENVIRONMENT**—Select the **Yes, I consent...** check box to allow HP or an Authorized Channel Partner to contact you about optimizing your HP environment.
 - **REMOTE SUPPORT SOFTWARE UPDATES**—Select the method to use for applying Insight RS software updates.
You can choose from the following methods: **Manually Apply**, **Automatically Download**, and **Automatically Download and Install** (default).
HP recommends using the **Automatically Download and Install** method.The **Contact Information** page opens.
7. Enter your company contact information and language preference, and then click **Next**.

NOTE: You can enter special support delivery instructions in the **Special instructions for support delivery** box. The text that you enter is included with service events and is visible to HP support or Authorized Channel Partners when Insight RS submits an event. For example, you could enter a message similar to the following: **If you get an event from my site on New Year's Day, call my pager instead, at +1-555-555-5555.**

The **Site Information** page opens.
8. Enter your site information and time zone, and then click **Next**.

① **IMPORTANT:** Verify that your site information is entered correctly. The Insight RS software does not automatically validate address details such as the city, state, and postal code.

The **Registering HP Insight Remote Support** page opens.
9. Do one of the following:
 - Click **Test Connection**.
 - If needed, select the **Use Web Proxy to access Internet (optional)** check box, enter a web proxy, and then click **Test Connection**.If the connection is successful, the **Internet Status** changes to **Connected**.
10. Click **Register With HP**.
The **HP Registration Status** changes to **Registered**.
11. Click **Next**.
The **Integration with HP Insight Online** page opens.
Use this page to enable the feature for viewing your devices by using Insight Online.
12. Enter your HP Passport user name and password, and then click **Register with HP Insight Online**.
Upon successful validation, the **HPSC Registration Status** changes to **Registered**.
13. Click **Next**.
The **HP Authorized Channel Partners** page opens. The information you enter on this page is used as the default information for newly discovered devices.

14. Accept the default settings if support for your IT infrastructure is provided by HP.
If support is provided by an HP Authorized Channel Partner, enter the following information:
 - Default HP Authorized Service Partner
 - Default HP Authorized Reseller/Distributor
 - Default Installer

For each HP Authorized Channel Partner, enter the Partner ID in the **Partner ID** box, click **Check ID**, and then verify that the correct partner is listed.

NOTE: The Partner ID is the Location ID assigned to the Channel Partner during the partner registration process.

15. Click **Next**.
The **Conclusion** page opens.
16. Click **Finish**.

Configuring the RIBCL protocol

HP recommends configuring the RIBCL protocol before registering an HP ProLiant server for Insight RS.

To configure the RIBCL protocol:

1. Log in to the Insight RS Console (<https://<Insight RS Hosting Device IP address or FQDN>:7906>).
2. From the main menu, select **Discovery**, and then click the **Credentials** tab.
3. From the **Select and Configure Protocol** list, select **iLO Remote Insight Board Command Language Protocol (RIBCL)**, and then click **New**.
4. Enter the user name and password of an iLO user account on the HP ProLiant server you want to register for Insight Remote Support.
5. Click **Add**.



TIP: If you use the same credentials to access iLO on all HP ProLiant servers, you configure the RIBCL protocol only once. If you use different credentials to access iLO on each HP ProLiant server, you must configure the RIBCL protocol for each server.

For information about configuring Named Credentials that can be reused when configuring one or more devices, see the **Company Information→Named Credentials** page in the Insight RS Console.

Configuring the HP SIM Adapter

If you installed HP SIM on the Hosting Device before installing Insight RS, the HP SIM Adapter is installed automatically but must be enabled.

If you installed HP SIM after installing Insight RS, you must install the HP SIM Adapter manually from the **Software Updates** tab on the **Administrator Settings** page. For more information, see the Insight RS online help.

To configure the HP SIM Adapter:

1. Log in to the Insight RS Console (<https://<Insight RS Hosting Device IP address or FQDN>:7906>).
2. From the main menu, select **Administrator Settings**.
3. Click the **Integration Adapters** tab.
4. Click the **HP SIM Adapter** heading to expand the HP SIM Adapter pane.

The pane is divided into three sections: **HP SIM Connection Information**, **Additional Settings**, and **Perform Manual Device Synchronization**.

5. Select the **Enable HP SIM Adapter** check box.

6. Enter the following information in the **HP SIM Connection Information** section:

- **HP SIM Username**—Enter the user name used to log in to HP SIM.

You must log in as an Administrator.



TIP: Use an HP SIM-specific account with a password that does not expire. This will help you to avoid issues if the account is tied to a user's account that could be disabled or locked out.

- **HP SIM Password**—Enter the password used to log in to HP SIM.

7. Select one or more of the following check boxes in the **Additional Settings** section:

- **Automatically sync new/deleted devices from HP SIM**—Select this check box to automatically do the following:

- Identify devices that have been added to HP SIM, and add them to Insight RS.
- Identify devices that have been deleted from HP SIM, and disable them in Insight RS.

The devices in Insight RS are disabled, not deleted. The devices still appear in the Insight RS Console.

- **Automatically sync new/deleted credentials from HP SIM**—Select this check box to automatically do the following:

- Identify protocol credentials that have been added to HP SIM, and add them to Insight RS.
- Identify any credentials that have been deleted or changed in HP SIM, and delete or change them in Insight RS.

- **Forward service events to HP SIM**—Select this check box to forward any service events related to HP SIM-specific devices to HP SIM.

① **IMPORTANT:** When using the HP SIM Adapter, be sure to discover devices in HP SIM rather than in Insight RS so the devices are synchronized between the two applications.

8. Select the **Perform Manual Device Synchronization** check box if you need to manually synchronize your devices.

To correctly synchronize information between HP SIM and Insight RS, the device you want to add or update must be successfully discovered and identified by HP SIM with the correct credential and system information.

For more information about discovery and identification, see the *HP Systems Insight Manager User Guide*.

When you select the **Perform Manual Device Synchronization** check box, additional options are displayed.

9. Select from the following options:

- **Include Credentials**—Select this check box to transfer any changes made to protocol credentials in HP SIM to Insight RS.
- **All devices from HP SIM**—Select this option to transfer all device changes made in HP SIM to Insight RS.
- **Single device from HP SIM**—Select this option to transfer specified device changes made in HP SIM to Insight RS. Add the IP address/FQDN for the device you want to synchronize with HP SIM.

10. Click **Save Adapter Settings**.

Insight RS saves the HP SIM Adapter configuration. **(Enabled)** now appears next to the HP SIM Adapter to indicate that it is enabled.

Glossary

AMS	Agentless Management Service.
CA	Certificate authority.
CN	Common Name.
CSR	Certificate Signing Request.
DHCP	Dynamic Host Configuration Protocol.
DNS	Domain Name System.
Fibre Channel adapter	A Fibre Channel PCI host bus adapter (HBA) located in a controller node. The Fibre Channel adapter connects a controller node to a host or to a drive chassis.
FIPS	Federal Information Processing Standard.
FQDN	Fully Qualified Domain Name.
FRU	Field replaceable unit. An assembly component that is designed to be replaced on site, without the system having to be returned to the manufacturer for repair.
Hosting Device	A supported Windows ProLiant server that hosts the Insight RS software.
HP SIM	HP Systems Insight Manager.
HPONCFG	HP Lights-Out Online Configuration Utility.
HPSC	HP Support Center.
iLO	Integrated Lights-Out.
Insight RS	The software associated with the Insight Remote Support central connect configuration.
Insight RS Console	The Insight Remote Support user interface that is installed on the Hosting Device.
iSCSI	Internet small computer system interface. Like an ordinary SCSI interface, iSCSI is standards-based and efficiently transmits block-level data between a host computer (such as a server that hosts Exchange or SQL Server) and a target device (such as the HP All-in-One Storage System). By carrying SCSI commands over IP networks, iSCSI is used to facilitate data transfers over intranets and to manage storage over long distances.
MAC	Media Access Control.
MIB	Management Information Base. A database of managed objects accessed by network management protocols. An SNMP MIB is a set of parameters that an SNMP management station can query or set in the SNMP agent of a network device (for example, a router).
NIC	Network interface card. A device that handles communication between a device and other devices on a network.
OA	Onboard Administrator.
PKCS	Public-key cryptography standards.
RBSU	ROM-Based Setup Utility.
RIBCL	Remote Insight Board Command Language.
RSA	An algorithm for public-key cryptography.
SCSI	Small Computer Systems Interface. A standard, intelligent parallel interface for attaching peripheral devices to computers, based on a device-independent protocol.
SHA	Secure Hash Algorithm.
SLES	SUSE Linux Enterprise Server.
SMBIOS	System Management BIOS.
SPP	HP Service Pack for ProLiant.
SSL	Secure Sockets Layer.
UEFI	Unified Extensible Firmware Interface
UTC	Coordinated Universal Time.
WBEM	Web-Based Enterprise Management.

Index

A

- Active Health System reporting
 - schedule, 43
- Agentless Management Service, 9, 49
 - installing, 59
 - verifying installation, 60
- AMS
 - Proactive Care requirement, 6

B

- browser support, 8

C

- Channel Partner IDs, 8
- collections see data collection

D

- data collection
 - schedule
 - iLO, 41
 - OA, 42
 - sending
 - iLO, 41
 - OA, 42
 - viewing
 - Insight Online, 45
 - Insight RS, 46
- documentation, 58

E

- enclosure
 - central connect registration, 34
 - central connect unregistration, 37
 - changing the remote support configuration, 48
 - direct connect unregistration, 29
 - Insight Online direct connect, 21
 - prerequisites, 12
 - setting up, 12

H

- Hosting Device, 31
 - configuring, 64
 - registering for remote support, 47
- HP BladeSystem c-Class enclosure see enclosure
- HP Passport, 8
- HP ProLiant server see server
- HP SIM
 - configuring the HP SIM Adapter, 66
 - missing credentials, 56
- HPONCFG, 50

I

- iLO
 - certificate error, 51
 - connection error during registration, 54

- firmware update error, 50
- sending a test event, 38
- sending Active Health System information, 43
- sending data collection information, 41
- session ends during direct connect registration, 55
- iLO registration
 - required files, 9
 - setting up the server, 9
- Insight Online
 - completing direct connect registration, 25
 - duplicate records, 55
 - incorrect operating system information, 51
 - server identification, 49
 - server operating system name and version not listed, 49
 - verifying access, 13
 - viewing a test event, 40
 - viewing data collection information, 45
- Insight Online direct connect
 - changing to Insight Remote Support central connect, 48
 - completing the registration in Insight Online, 25
 - enclosure registration, 21
 - enclosure unregistration, 29
 - iLO connection error, 54
 - iLO session ends during registration, 55
 - network requirements, 14
 - OA connection error, 54
 - prerequisites, 14
 - registered server with new system board, 55
 - registering an Insight RS Hosting Device, 47
 - server registration
 - iLO, 15
 - Intelligent Provisioning, 18
 - server unregistration
 - iLO, 28
 - Intelligent Provisioning, 28
- Insight Remote Support central connect
 - changing to Insight Online direct connect, 48
 - enclosure registration, 34
 - enclosure unregistration, 37
 - incorrect warranty details, 55
 - Insight RS Hosting Device, 31, 64
 - network requirements, 30
 - prerequisites, 30
 - RIBCL protocol, 66
 - server registration
 - iLO, 32
 - Intelligent Provisioning, 33
 - server unregistration
 - iLO, 36
 - Intelligent Provisioning, 36
 - SSL Bio Error during registration, 55
- Insight RS
 - certificate error, 56
 - collection time stamp, 56
 - configuring the HP SIM Adapter, 66

- event time stamp, 56
- Hosting Device, 31
- Hosting Device Setup Wizard, 64
- incorrect warranty details, 55
- registering a Hosting Device for remote support, 47
- RIBCL protocol, 66
- server identification, 49
- server operating system name and version not listed, 49
- viewing a test event, 41
- viewing data collection information, 46
- installing
 - Agentless Management Service, 59
- Intelligent Provisioning registration
 - required files, 11
 - setting up the server, 11

N

- network requirements
 - Insight Online direct connect, 14
 - Insight Remote Support central connect, 30

O

- Onboard Administrator
 - connection error during registration, 54
 - sending a test event, 39
 - sending data collection information, 42
- Onboard Administrator registration
 - required files, 12
 - setting up the enclosure, 12
- overview
 - Remote Support, 5

P

- prerequisites, 8
 - central connect registration, 30
 - enclosure, 12
 - Insight Online, 13
 - Insight Online direct connect, 14
 - preinstallation, 8
 - server, 9
- Proactive Care
 - requirements, 6

R

- RIBCL protocol
 - configuring for central connect Remote Support, 66

S

- server
 - central connect registration
 - iLO, 32
 - Intelligent Provisioning, 33
 - central connect unregistration
 - iLO, 36
 - Intelligent Provisioning, 36
 - changing the remote support configuration, 48
 - direct connect registration
 - iLO, 15

- Intelligent Provisioning, 18
- direct connect unregistration
 - iLO, 28
 - Intelligent Provisioning, 28
- duplicate registration, 50
- operating system name and version not listed, 49
- prerequisites, 9
- setting up for registration
 - iLO, 9
 - Intelligent Provisioning, 11
- service events
 - sending a test event
 - iLO, 38
 - OA, 39
 - viewing a test event
 - Insight Online, 40
 - Insight RS Console, 41
- support, 58

T

- troubleshooting
 - certificate error, 51, 56
 - duplicate records, 55
 - duplicate registration, 50
 - HP SIM credentials, 56
 - iLO connection error, 54
 - iLO firmware update, 50
 - iLO session ends during direct connect registration, 55
 - incorrect operating system information, 51
 - OA connection error, 54
 - registered server with new system board, 55
 - server identification, 49
 - server operating system name and version not listed, 49
 - SSL Bio Error, 55
 - time stamp, 56
 - warranty status, 55

V

- verifying
 - Agentless Management Service, 60

W

- warranty
 - incorrect status, 55
 - verifying, 8
- web proxy
 - configuring
 - iLO, 15, 21
 - Intelligent Provisioning, 18
 - editing
 - iLO, 18
 - Intelligent Provisioning, 21
 - OA, 24