Extended Results and Constellation Atlas

Primary diagnosis dataset: 3355 captures / 299 configurations.
Mean dual-polarization BER below 0.024: 2224 accepted captures / 246 configurations.

Part A: classification, setting-resolved detection, operating-condition transfer, and BER.
Part B: configuration-indexed representative constellations.

Results use saved predictions and derived communication-quality outputs. The reference BER does not constitute a measured post-FEC guarantee.

Five-class recall and binary fault F1 are distinct metrics. Full and low-BER setting curves each use their own common operating support. Confidence intervals condition on the fitted predictions and resample configurations.

Each BER point summarizes accepted repeats at one configuration, with the available-repeat count reported. Constellation panels show recovered symbols. Configurations without accepted DSP outputs remain listed in the index.

The complete per-capture and per-configuration tables accompany the analysis materials. Configuration identifiers link the tables and figures.

Contents | results and communication quality

S1.1 | Complete primary-set class and distance coverage 14

S1.2 | Feature--label correlations | primary set 15

S1.3 | Feature--label correlations | common support 16

S1.4 | Feature--feature correlations | primary set 17

S2.1 | BER threshold | capture-level distribution and membership 18

S2.2 | BER | Normal operation 19

S2.3 | BER | VOA attenuation 20

S2.4 | BER | EDFA gain reduction 21

S2.5 | BER | WSS center offset 22

S2.6 | BER | WSS bandwidth narrowing 23

S2.7 | BER versus setting | QPSK and 16QAM at 640/960 km 24

S2.8 | Recovered constellations | all 17 settings 25

S3.1 | Five-class recognition versus setting 26

S3.2 | Binary detection versus setting 27

S3.3 | Exact-condition detection | exact magnitude full attenuation 28

S3.4 | Exact-condition detection | exact magnitude full edfa 29

S3.5 | Exact-condition detection | exact magnitude full WSS bandwidth 30

S3.6 | Exact-condition detection | exact magnitude full WSS offset 31

S3.7 | Exact-condition detection | exact magnitude low BER attenuation 32

S3.8 | Exact-condition detection | exact magnitude low BER edfa 33

S3.9 | Exact-condition detection | exact magnitude low BER WSS bandwidth 34

S3.10 | Exact-condition detection | exact magnitude low BER WSS offset 35

S4.1 | Signal versus metadata and power controls 36

S4.2 | Paired distance transfer with and without spectra 37

S5.1 | Acquisition-date and training-cohort comparisons 38

S6.1 | Reference classification 39

S6.2 | Five-class confusion matrices 40

S6.3 | Signal-representation comparison 41

Contents | results and communication quality

S6.4 | Held-out operating-condition values 42

S6.5 | Complete operating-condition holdout 43

S6.6 | Within-condition models | within condition 44

Feature-index reference 45

All 299 physical configurations 46

Constellation index | 1-30

Modulation | distance | launch power | setting	Page
QPSK | 320 km | 1 dBm | attenuation 3dB	47
QPSK | 320 km | 1 dBm | attenuation 5dB	47
QPSK | 320 km | 1 dBm | edfa 1dB	48
QPSK | 320 km | 1 dBm | edfa 3dB	48
QPSK | 320 km | 1 dBm | edfa 5dB	49
QPSK | 320 km | 1 dBm | edfa 9dB	49
QPSK | 320 km | 1 dBm | wss offset 4GHz	50
QPSK | 320 km | 1 dBm | wss offset 8GHz	50
QPSK | 320 km | 1 dBm | wss offset 12GHz	51
QPSK | 320 km | 1 dBm | wss offset 16GHz	51
QPSK | 320 km | 1 dBm | wss offset 20GHz	52
QPSK | 320 km | 1 dBm | wss offset 24GHz	52
QPSK | 320 km | 1 dBm | Normal	53
QPSK | 320 km | 3 dBm | attenuation 3dB	53
QPSK | 320 km | 3 dBm | attenuation 5dB	54
QPSK | 320 km | 3 dBm | edfa 1dB	54
QPSK | 320 km | 3 dBm | edfa 3dB	55
QPSK | 320 km | 3 dBm | edfa 5dB	55
QPSK | 320 km | 3 dBm | edfa 9dB	56
QPSK | 320 km | 3 dBm | Normal	56
QPSK | 320 km | 5 dBm | Normal	57
QPSK | 640 km | 1 dBm | attenuation 3dB	57
QPSK | 640 km | 1 dBm | attenuation 5dB	58
QPSK | 640 km | 1 dBm | edfa 1dB	58
QPSK | 640 km | 1 dBm | edfa 3dB	59
QPSK | 640 km | 1 dBm | edfa 5dB	59
QPSK | 640 km | 1 dBm | edfa 9dB	60
QPSK | 640 km | 1 dBm | wss offset 4GHz	60
QPSK | 640 km | 1 dBm | wss offset 8GHz	61
QPSK | 640 km | 1 dBm | wss offset 12GHz	61

Constellation index | 31-60

Modulation | distance | launch power | setting	Page
QPSK | 640 km | 1 dBm | wss offset 16GHz	62
QPSK | 640 km | 1 dBm | wss offset 20GHz	62
QPSK | 640 km | 1 dBm | wss offset 24GHz	63
QPSK | 640 km | 1 dBm | wss bandwidth 55GHz	63
QPSK | 640 km | 1 dBm | wss bandwidth 60GHz	64
QPSK | 640 km | 1 dBm | wss bandwidth 65GHz	64
QPSK | 640 km | 1 dBm | wss bandwidth 70GHz	65
QPSK | 640 km | 1 dBm | Normal (75 GHz)	65
QPSK | 640 km | 3 dBm | attenuation 3dB	66
QPSK | 640 km | 3 dBm | attenuation 5dB	66
QPSK | 640 km | 3 dBm | edfa 1dB	67
QPSK | 640 km | 3 dBm | edfa 3dB	67
QPSK | 640 km | 3 dBm | edfa 5dB	68
QPSK | 640 km | 3 dBm | edfa 9dB	68
QPSK | 640 km | 3 dBm | wss offset 4GHz	69
QPSK | 640 km | 3 dBm | wss offset 8GHz	69
QPSK | 640 km | 3 dBm | wss offset 12GHz	70
QPSK | 640 km | 3 dBm | wss offset 16GHz	70
QPSK | 640 km | 3 dBm | wss offset 20GHz	71
QPSK | 640 km | 3 dBm | wss offset 24GHz	71
QPSK | 640 km | 3 dBm | wss bandwidth 55GHz	72
QPSK | 640 km | 3 dBm | wss bandwidth 60GHz	72
QPSK | 640 km | 3 dBm | wss bandwidth 65GHz	73
QPSK | 640 km | 3 dBm | wss bandwidth 70GHz	73
QPSK | 640 km | 3 dBm | Normal (75 GHz)	74
QPSK | 640 km | 5 dBm | wss offset 4GHz	74
QPSK | 640 km | 5 dBm | wss offset 8GHz	75
QPSK | 640 km | 5 dBm | wss offset 12GHz	75
QPSK | 640 km | 5 dBm | wss offset 16GHz	76
QPSK | 640 km | 5 dBm | wss offset 20GHz	76

Constellation index | 61-90

Modulation | distance | launch power | setting	Page
QPSK | 640 km | 5 dBm | wss offset 24GHz	77
QPSK | 640 km | 5 dBm | wss bandwidth 55GHz	77
QPSK | 640 km | 5 dBm | wss bandwidth 60GHz	78
QPSK | 640 km | 5 dBm | wss bandwidth 65GHz	78
QPSK | 640 km | 5 dBm | wss bandwidth 70GHz	79
QPSK | 640 km | 5 dBm | Normal (75 GHz)	79
QPSK | 960 km | 1 dBm | attenuation 3dB	80
QPSK | 960 km | 1 dBm | attenuation 5dB	80
QPSK | 960 km | 1 dBm | edfa 1dB	81
QPSK | 960 km | 1 dBm | edfa 3dB	81
QPSK | 960 km | 1 dBm | edfa 5dB	82
QPSK | 960 km | 1 dBm | edfa 9dB	82
QPSK | 960 km | 1 dBm | wss offset 4GHz	83
QPSK | 960 km | 1 dBm | wss offset 8GHz	83
QPSK | 960 km | 1 dBm | wss offset 12GHz	84
QPSK | 960 km | 1 dBm | wss offset 16GHz	84
QPSK | 960 km | 1 dBm | wss offset 20GHz	85
QPSK | 960 km | 1 dBm | wss offset 24GHz	85
QPSK | 960 km | 1 dBm | wss bandwidth 55GHz	86
QPSK | 960 km | 1 dBm | wss bandwidth 60GHz	86
QPSK | 960 km | 1 dBm | wss bandwidth 65GHz	87
QPSK | 960 km | 1 dBm | wss bandwidth 70GHz	87
QPSK | 960 km | 1 dBm | Normal (75 GHz)	88
QPSK | 960 km | 3 dBm | attenuation 3dB	88
QPSK | 960 km | 3 dBm | attenuation 5dB	89
QPSK | 960 km | 3 dBm | edfa 1dB	89
QPSK | 960 km | 3 dBm | edfa 3dB	90
QPSK | 960 km | 3 dBm | edfa 5dB	90
QPSK | 960 km | 3 dBm | edfa 9dB	91
QPSK | 960 km | 3 dBm | wss offset 4GHz	91

Constellation index | 91-120

Modulation | distance | launch power | setting	Page
QPSK | 960 km | 3 dBm | wss offset 8GHz	92
QPSK | 960 km | 3 dBm | wss offset 12GHz	92
QPSK | 960 km | 3 dBm | wss offset 16GHz	93
QPSK | 960 km | 3 dBm | wss offset 20GHz	93
QPSK | 960 km | 3 dBm | wss offset 24GHz	94
QPSK | 960 km | 3 dBm | wss bandwidth 55GHz	94
QPSK | 960 km | 3 dBm | wss bandwidth 60GHz	95
QPSK | 960 km | 3 dBm | wss bandwidth 65GHz	95
QPSK | 960 km | 3 dBm | wss bandwidth 70GHz	96
QPSK | 960 km | 3 dBm | Normal (75 GHz)	96
QPSK | 960 km | 5 dBm | wss offset 4GHz	97
QPSK | 960 km | 5 dBm | wss offset 8GHz	97
QPSK | 960 km | 5 dBm | wss offset 12GHz	98
QPSK | 960 km | 5 dBm | wss offset 16GHz	98
QPSK | 960 km | 5 dBm | wss offset 20GHz	99
QPSK | 960 km | 5 dBm | wss offset 24GHz	99
QPSK | 960 km | 5 dBm | wss bandwidth 55GHz	100
QPSK | 960 km | 5 dBm | wss bandwidth 60GHz	100
QPSK | 960 km | 5 dBm | wss bandwidth 65GHz	101
QPSK | 960 km | 5 dBm | wss bandwidth 70GHz	101
QPSK | 960 km | 5 dBm | Normal (75 GHz)	102
QPSK | 1280 km | 1 dBm | attenuation 3dB	102
QPSK | 1280 km | 1 dBm | attenuation 5dB	103
QPSK | 1280 km | 1 dBm | edfa 1dB	103
QPSK | 1280 km | 1 dBm | edfa 3dB	104
QPSK | 1280 km | 1 dBm | edfa 5dB	104
QPSK | 1280 km | 1 dBm | edfa 9dB	105
QPSK | 1280 km | 1 dBm | Normal	105
QPSK | 1280 km | 3 dBm | attenuation 3dB	106
QPSK | 1280 km | 3 dBm | attenuation 5dB	106

Constellation index | 121-150

Modulation | distance | launch power | setting	Page
QPSK | 1280 km | 3 dBm | edfa 1dB	107
QPSK | 1280 km | 3 dBm | edfa 3dB	107
QPSK | 1280 km | 3 dBm | edfa 5dB	108
QPSK | 1280 km | 3 dBm | edfa 9dB	108
QPSK | 1280 km | 3 dBm | Normal	109
QPSK | 1280 km | 5 dBm | Normal	109
QPSK | 1600 km | 1 dBm | Normal	110
QPSK | 1600 km | 3 dBm | Normal	110
QPSK | 1600 km | 5 dBm | Normal	111
QPSK | 1920 km | 1 dBm | Normal	111
QPSK | 1920 km | 3 dBm | Normal	112
QPSK | 1920 km | 5 dBm | Normal [no valid image]	112
QPSK | 2240 km | 1 dBm | Normal	113
QPSK | 2240 km | 3 dBm | Normal	113
QPSK | 2240 km | 5 dBm | Normal [no valid image]	114
16QAM | 320 km | 1 dBm | attenuation 3dB	114
16QAM | 320 km | 1 dBm | attenuation 5dB	115
16QAM | 320 km | 1 dBm | edfa 1dB	115
16QAM | 320 km | 1 dBm | edfa 3dB	116
16QAM | 320 km | 1 dBm | edfa 5dB	116
16QAM | 320 km | 1 dBm | edfa 9dB	117
16QAM | 320 km | 1 dBm | Normal	117
16QAM | 320 km | 3 dBm | attenuation 3dB	118
16QAM | 320 km | 3 dBm | attenuation 5dB	118
16QAM | 320 km | 3 dBm | edfa 1dB	119
16QAM | 320 km | 3 dBm | edfa 3dB	119
16QAM | 320 km | 3 dBm | edfa 5dB	120
16QAM | 320 km | 3 dBm | edfa 9dB	120
16QAM | 320 km | 3 dBm | Normal	121
16QAM | 320 km | 5 dBm | attenuation 3dB	121

Constellation index | 151-180

Modulation | distance | launch power | setting	Page
16QAM | 320 km | 5 dBm | attenuation 5dB	122
16QAM | 320 km | 5 dBm | edfa 1dB	122
16QAM | 320 km | 5 dBm | edfa 3dB	123
16QAM | 320 km | 5 dBm | edfa 5dB	123
16QAM | 320 km | 5 dBm | edfa 9dB	124
16QAM | 320 km | 5 dBm | wss offset 4GHz	124
16QAM | 320 km | 5 dBm | wss offset 8GHz	125
16QAM | 320 km | 5 dBm | wss offset 12GHz	125
16QAM | 320 km | 5 dBm | wss offset 16GHz	126
16QAM | 320 km | 5 dBm | wss offset 20GHz	126
16QAM | 320 km | 5 dBm | wss offset 24GHz	127
16QAM | 320 km | 5 dBm | Normal	127
16QAM | 640 km | 1 dBm | attenuation 3dB	128
16QAM | 640 km | 1 dBm | attenuation 5dB	128
16QAM | 640 km | 1 dBm | edfa 1dB	129
16QAM | 640 km | 1 dBm | edfa 3dB	129
16QAM | 640 km | 1 dBm | edfa 5dB	130
16QAM | 640 km | 1 dBm | edfa 9dB	130
16QAM | 640 km | 1 dBm | wss offset 4GHz	131
16QAM | 640 km | 1 dBm | wss offset 8GHz	131
16QAM | 640 km | 1 dBm | wss offset 12GHz	132
16QAM | 640 km | 1 dBm | wss offset 16GHz	132
16QAM | 640 km | 1 dBm | wss offset 20GHz	133
16QAM | 640 km | 1 dBm | wss offset 24GHz	133
16QAM | 640 km | 1 dBm | wss bandwidth 55GHz	134
16QAM | 640 km | 1 dBm | wss bandwidth 60GHz	134
16QAM | 640 km | 1 dBm | wss bandwidth 65GHz	135
16QAM | 640 km | 1 dBm | wss bandwidth 70GHz	135
16QAM | 640 km | 1 dBm | Normal (75 GHz)	136
16QAM | 640 km | 3 dBm | attenuation 3dB	136

Constellation index | 181-210

Modulation | distance | launch power | setting	Page
16QAM | 640 km | 3 dBm | attenuation 5dB	137
16QAM | 640 km | 3 dBm | edfa 1dB	137
16QAM | 640 km | 3 dBm | edfa 3dB	138
16QAM | 640 km | 3 dBm | edfa 5dB	138
16QAM | 640 km | 3 dBm | edfa 9dB	139
16QAM | 640 km | 3 dBm | wss offset 4GHz	139
16QAM | 640 km | 3 dBm | wss offset 8GHz	140
16QAM | 640 km | 3 dBm | wss offset 12GHz	140
16QAM | 640 km | 3 dBm | wss offset 16GHz	141
16QAM | 640 km | 3 dBm | wss offset 20GHz	141
16QAM | 640 km | 3 dBm | wss offset 24GHz	142
16QAM | 640 km | 3 dBm | wss bandwidth 55GHz	142
16QAM | 640 km | 3 dBm | wss bandwidth 60GHz	143
16QAM | 640 km | 3 dBm | wss bandwidth 65GHz	143
16QAM | 640 km | 3 dBm | wss bandwidth 70GHz	144
16QAM | 640 km | 3 dBm | Normal (75 GHz)	144
16QAM | 640 km | 5 dBm | attenuation 3dB	145
16QAM | 640 km | 5 dBm | attenuation 5dB	145
16QAM | 640 km | 5 dBm | edfa 1dB	146
16QAM | 640 km | 5 dBm | edfa 3dB	146
16QAM | 640 km | 5 dBm | edfa 5dB	147
16QAM | 640 km | 5 dBm | edfa 9dB	147
16QAM | 640 km | 5 dBm | wss offset 4GHz	148
16QAM | 640 km | 5 dBm | wss offset 8GHz	148
16QAM | 640 km | 5 dBm | wss offset 12GHz	149
16QAM | 640 km | 5 dBm | wss offset 16GHz	149
16QAM | 640 km | 5 dBm | wss offset 20GHz	150
16QAM | 640 km | 5 dBm | wss offset 24GHz	150
16QAM | 640 km | 5 dBm | wss bandwidth 55GHz	151
16QAM | 640 km | 5 dBm | wss bandwidth 60GHz	151

Constellation index | 211-240

Modulation | distance | launch power | setting	Page
16QAM | 640 km | 5 dBm | wss bandwidth 65GHz	152
16QAM | 640 km | 5 dBm | wss bandwidth 70GHz	152
16QAM | 640 km | 5 dBm | Normal (75 GHz)	153
16QAM | 960 km | 1 dBm | attenuation 3dB	153
16QAM | 960 km | 1 dBm | attenuation 5dB	154
16QAM | 960 km | 1 dBm | edfa 1dB	154
16QAM | 960 km | 1 dBm | edfa 3dB	155
16QAM | 960 km | 1 dBm | edfa 5dB	155
16QAM | 960 km | 1 dBm | edfa 9dB	156
16QAM | 960 km | 1 dBm | wss offset 4GHz	156
16QAM | 960 km | 1 dBm | wss offset 8GHz	157
16QAM | 960 km | 1 dBm | wss offset 12GHz	157
16QAM | 960 km | 1 dBm | wss offset 16GHz	158
16QAM | 960 km | 1 dBm | wss offset 20GHz	158
16QAM | 960 km | 1 dBm | wss offset 24GHz	159
16QAM | 960 km | 1 dBm | wss bandwidth 55GHz	159
16QAM | 960 km | 1 dBm | wss bandwidth 60GHz	160
16QAM | 960 km | 1 dBm | wss bandwidth 65GHz	160
16QAM | 960 km | 1 dBm | wss bandwidth 70GHz	161
16QAM | 960 km | 1 dBm | Normal (75 GHz)	161
16QAM | 960 km | 3 dBm | attenuation 3dB	162
16QAM | 960 km | 3 dBm | attenuation 5dB	162
16QAM | 960 km | 3 dBm | edfa 1dB	163
16QAM | 960 km | 3 dBm | edfa 3dB	163
16QAM | 960 km | 3 dBm | edfa 5dB	164
16QAM | 960 km | 3 dBm | edfa 9dB	164
16QAM | 960 km | 3 dBm | wss offset 4GHz	165
16QAM | 960 km | 3 dBm | wss offset 8GHz	165
16QAM | 960 km | 3 dBm | wss offset 12GHz	166
16QAM | 960 km | 3 dBm | wss offset 16GHz	166

Constellation index | 241-270

Modulation | distance | launch power | setting	Page
16QAM | 960 km | 3 dBm | wss offset 20GHz	167
16QAM | 960 km | 3 dBm | wss offset 24GHz	167
16QAM | 960 km | 3 dBm | wss bandwidth 55GHz	168
16QAM | 960 km | 3 dBm | wss bandwidth 60GHz	168
16QAM | 960 km | 3 dBm | wss bandwidth 65GHz	169
16QAM | 960 km | 3 dBm | wss bandwidth 70GHz	169
16QAM | 960 km | 3 dBm | Normal (75 GHz)	170
16QAM | 960 km | 5 dBm | attenuation 3dB	170
16QAM | 960 km | 5 dBm | attenuation 5dB	171
16QAM | 960 km | 5 dBm | edfa 1dB	171
16QAM | 960 km | 5 dBm | edfa 3dB	172
16QAM | 960 km | 5 dBm | edfa 5dB	172
16QAM | 960 km | 5 dBm | edfa 9dB	173
16QAM | 960 km | 5 dBm | wss offset 4GHz	173
16QAM | 960 km | 5 dBm | wss offset 8GHz	174
16QAM | 960 km | 5 dBm | wss offset 12GHz	174
16QAM | 960 km | 5 dBm | wss offset 16GHz	175
16QAM | 960 km | 5 dBm | wss offset 20GHz	175
16QAM | 960 km | 5 dBm | wss offset 24GHz	176
16QAM | 960 km | 5 dBm | wss bandwidth 55GHz	176
16QAM | 960 km | 5 dBm | wss bandwidth 60GHz	177
16QAM | 960 km | 5 dBm | wss bandwidth 65GHz	177
16QAM | 960 km | 5 dBm | wss bandwidth 70GHz	178
16QAM | 960 km | 5 dBm | Normal (75 GHz)	178
16QAM | 1280 km | 1 dBm | attenuation 3dB	179
16QAM | 1280 km | 1 dBm | attenuation 5dB	179
16QAM | 1280 km | 1 dBm | edfa 1dB	180
16QAM | 1280 km | 1 dBm | edfa 3dB	180
16QAM | 1280 km | 1 dBm | edfa 5dB	181
16QAM | 1280 km | 1 dBm | edfa 9dB	181

Constellation index | 271-299

Modulation | distance | launch power | setting	Page
16QAM | 1280 km | 1 dBm | Normal	182
16QAM | 1280 km | 3 dBm | attenuation 3dB	182
16QAM | 1280 km | 3 dBm | attenuation 5dB	183
16QAM | 1280 km | 3 dBm | edfa 1dB	183
16QAM | 1280 km | 3 dBm | edfa 3dB	184
16QAM | 1280 km | 3 dBm | edfa 5dB	184
16QAM | 1280 km | 3 dBm | edfa 9dB	185
16QAM | 1280 km | 3 dBm | Normal	185
16QAM | 1280 km | 5 dBm | attenuation 3dB	186
16QAM | 1280 km | 5 dBm | attenuation 5dB	186
16QAM | 1280 km | 5 dBm | edfa 1dB	187
16QAM | 1280 km | 5 dBm | edfa 3dB	187
16QAM | 1280 km | 5 dBm | edfa 5dB	188
16QAM | 1280 km | 5 dBm | edfa 9dB	188
16QAM | 1280 km | 5 dBm | wss offset 20GHz	189
16QAM | 1280 km | 5 dBm | wss offset 24GHz	189
16QAM | 1280 km | 5 dBm | Normal	190
16QAM | 1280 km | unrecorded LP | Normal	190
16QAM | 1600 km | 1 dBm | Normal	191
16QAM | 1600 km | 3 dBm | Normal	191
16QAM | 1600 km | 5 dBm | Normal [no valid image]	192
16QAM | 1920 km | 1 dBm | Normal	192
16QAM | 1920 km | 3 dBm | Normal	193
16QAM | 1920 km | 5 dBm | Normal [no valid image]	193
16QAM | 2240 km | 1 dBm | Normal	194
16QAM | 2240 km | 3 dBm | Normal	194
16QAM | 2240 km | 5 dBm | Normal	195
64QAM | 320 km | 5 dBm | Normal	195
64QAM | 640 km | 5 dBm | Normal	196

S1.1 | Complete primary-set class and distance coverage

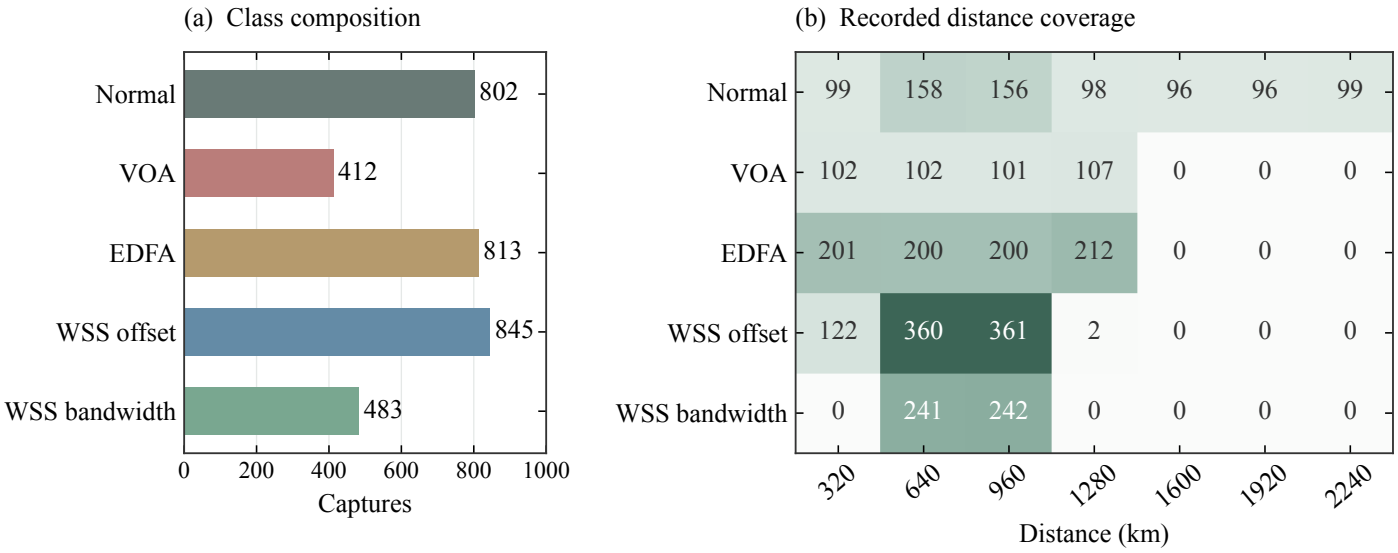

Results are grouped by the operating conditions and evaluation protocol indicated in the figure. Configuration identifiers link the figures to the accompanying data tables.

S1.2 | Feature--label correlations | primary set

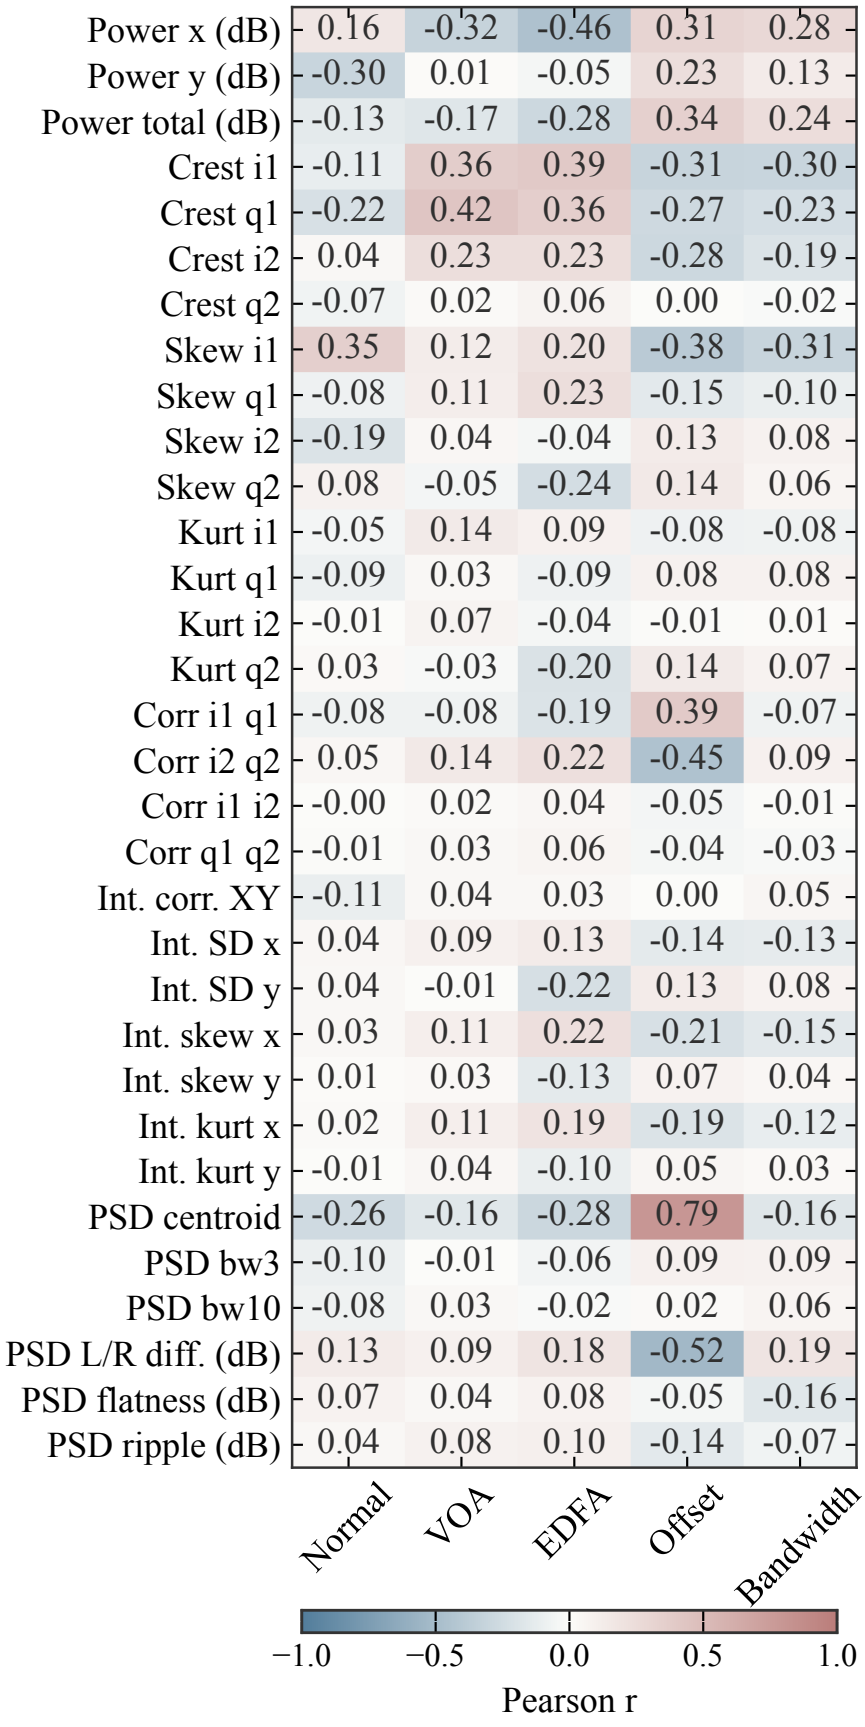

Pearson correlations with separate binary class indicators, not ordinal class codes. Shared [-1,1] scale. Sample associations are descriptive; they are not a causal estimate or held-out classifier performance.

S1.3 | Feature--label correlations | common support

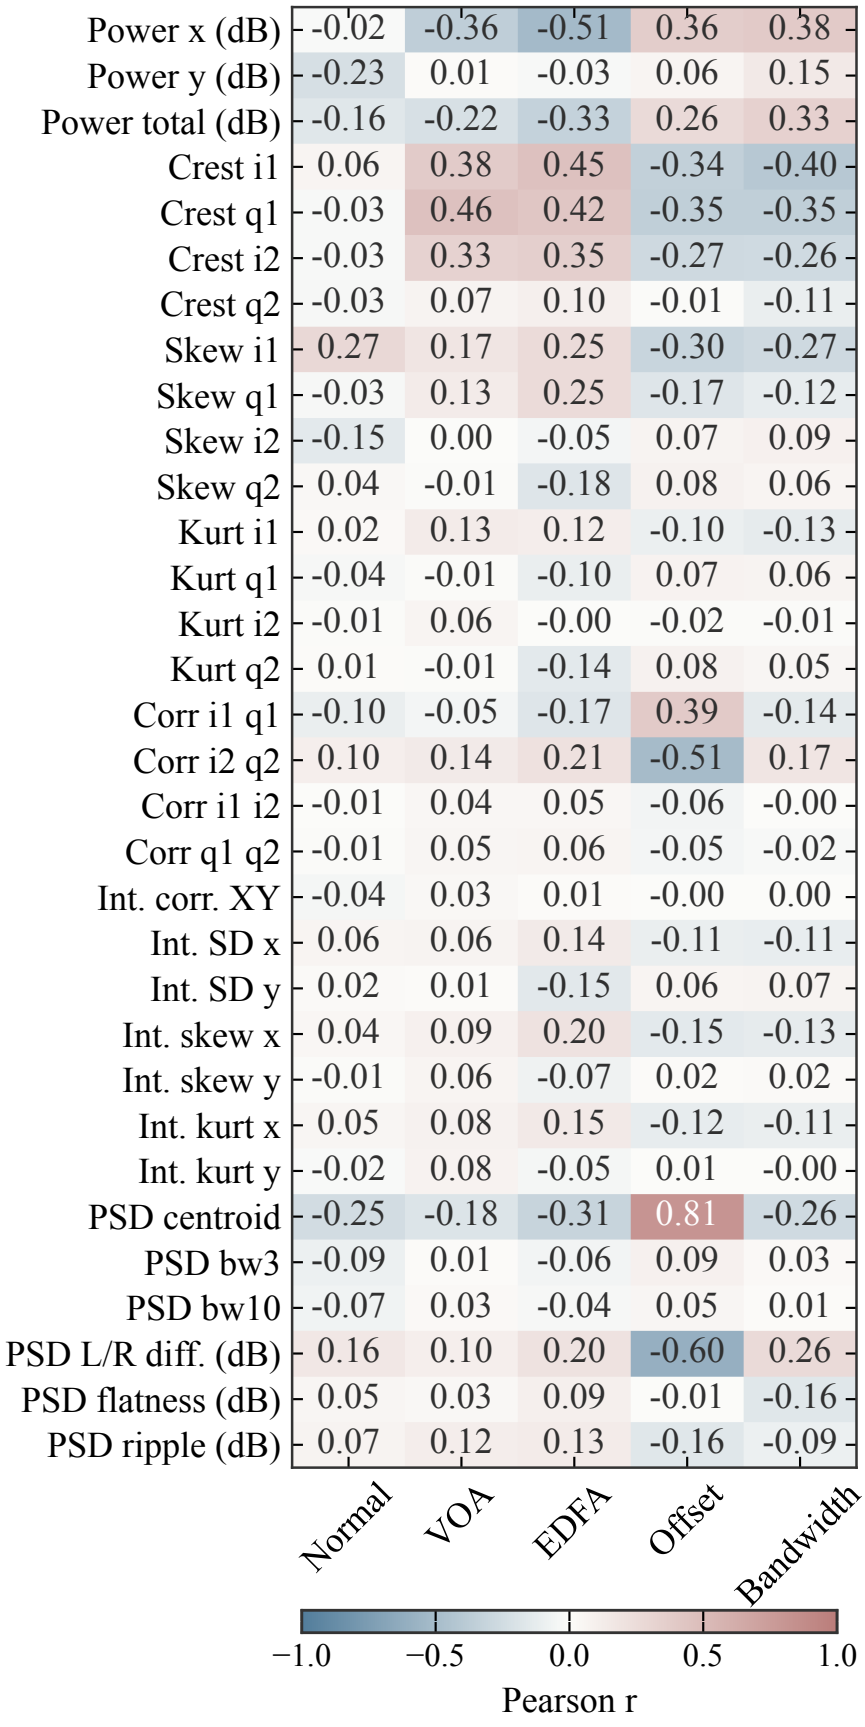

Pearson correlations with separate binary class indicators, not ordinal class codes. Shared [-1,1] scale. Sample associations are descriptive; they are not a causal estimate or held-out classifier performance.

S1.4 | Feature--feature correlations | primary set

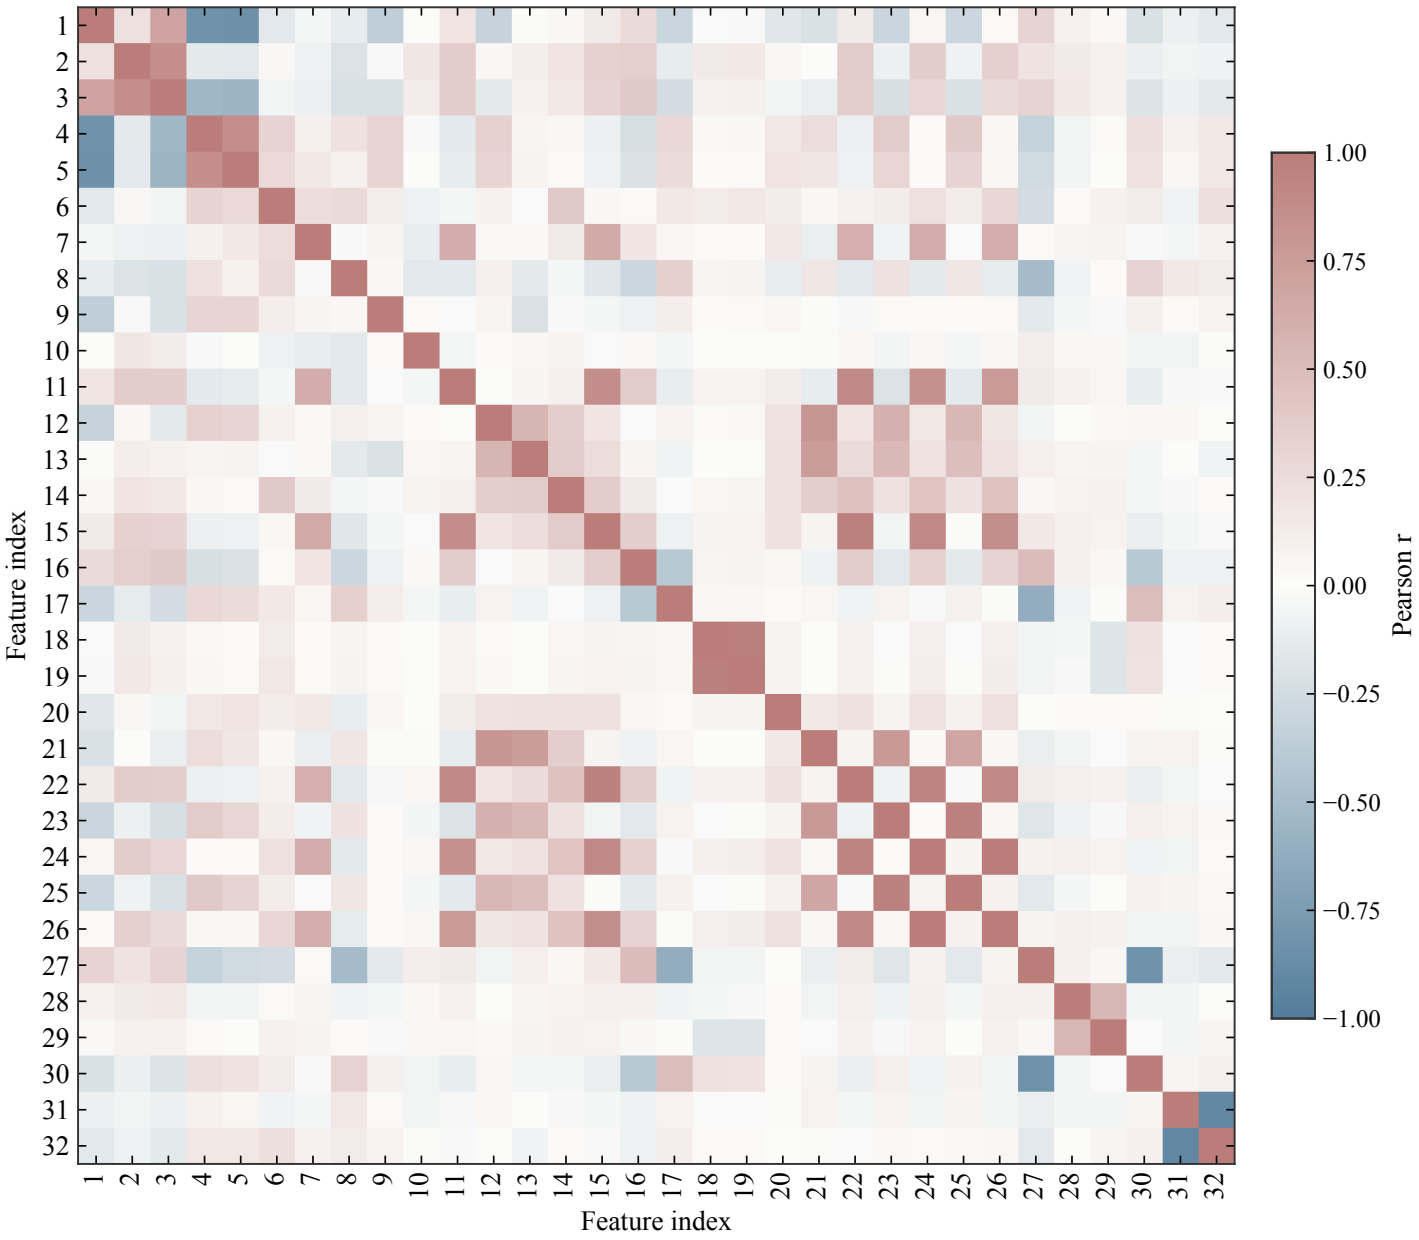

Pearson correlations among the 32 retained descriptors in 3355 primary captures. Feature indices are listed on the next reference page. No feature selection is performed from this descriptive matrix.

S2.1 | BER threshold | capture-level distribution and membership

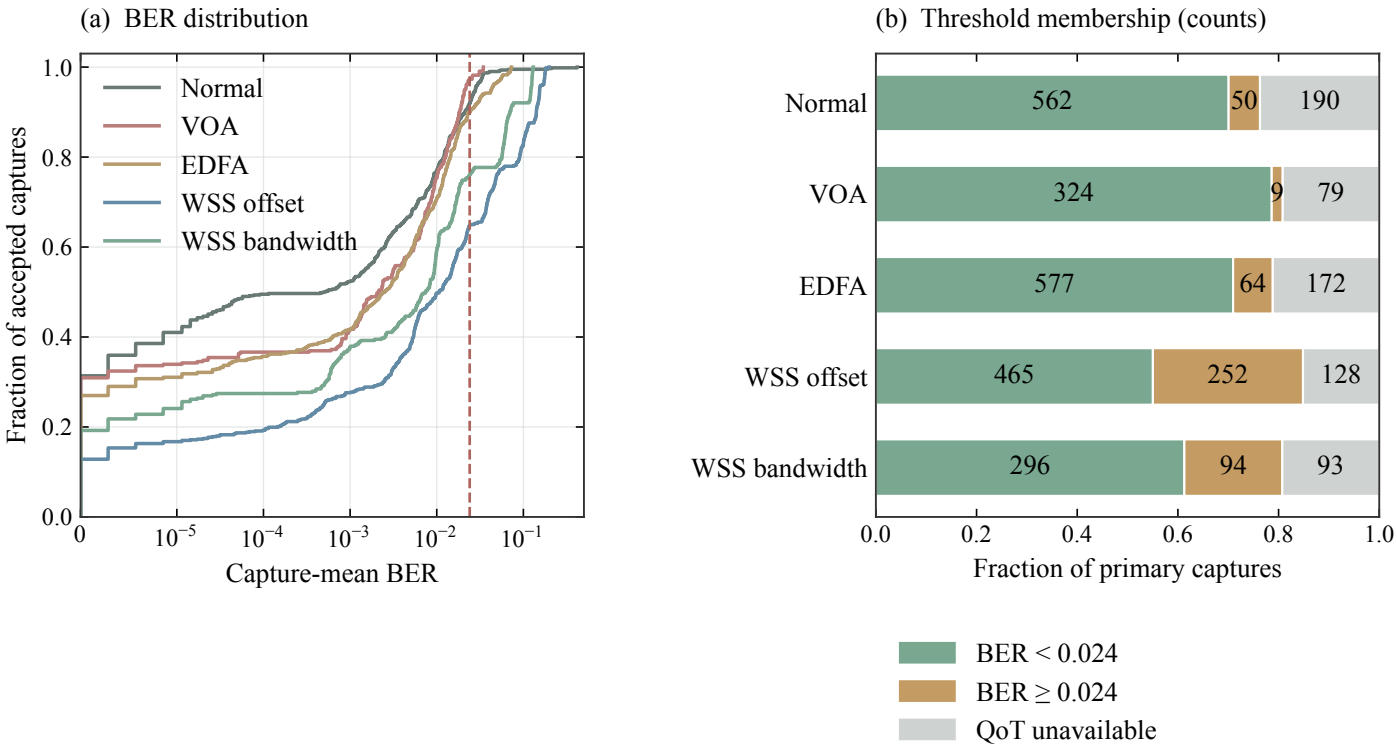

Left: empirical BER distributions among accepted captures. Right: primary capture counts partitioned into below-reference, at/above-reference, and no accepted QoT. This selection is per capture, not per configuration mean.

S2.2 | BER | Normal operation

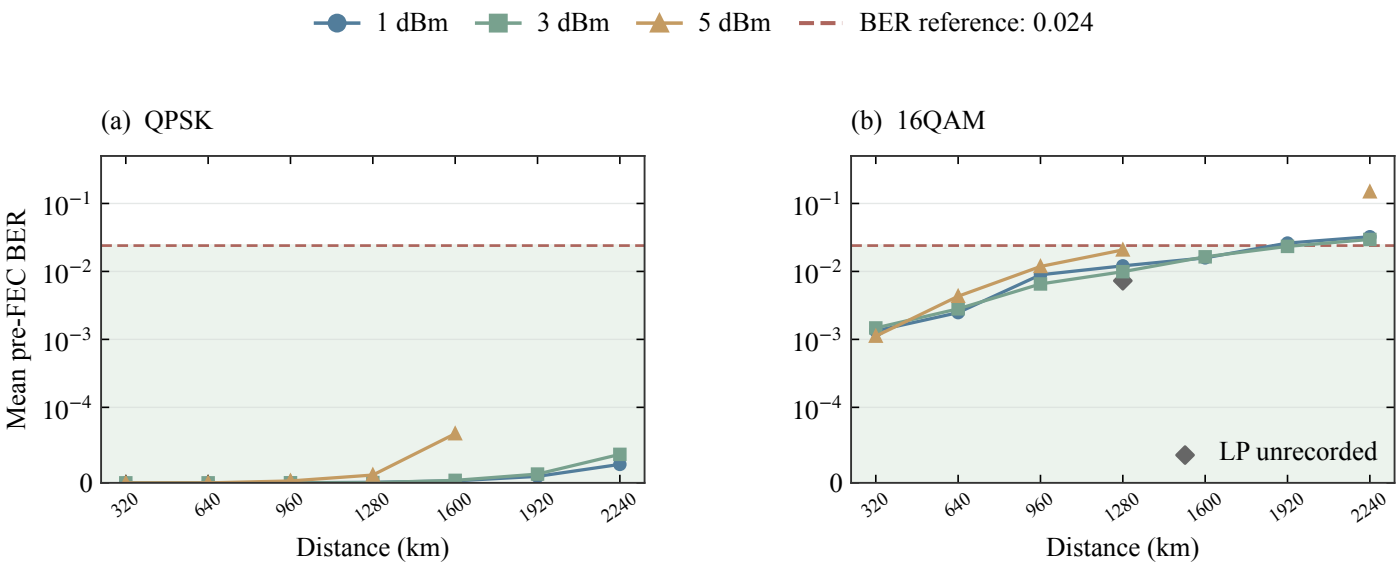

Normal-operation BER for QPSK and 16QAM only. Additional sparse acquisitions remain in the complete configuration index. The full model retains all 3355 primary captures.

S2.3 | BER | VOA attenuation

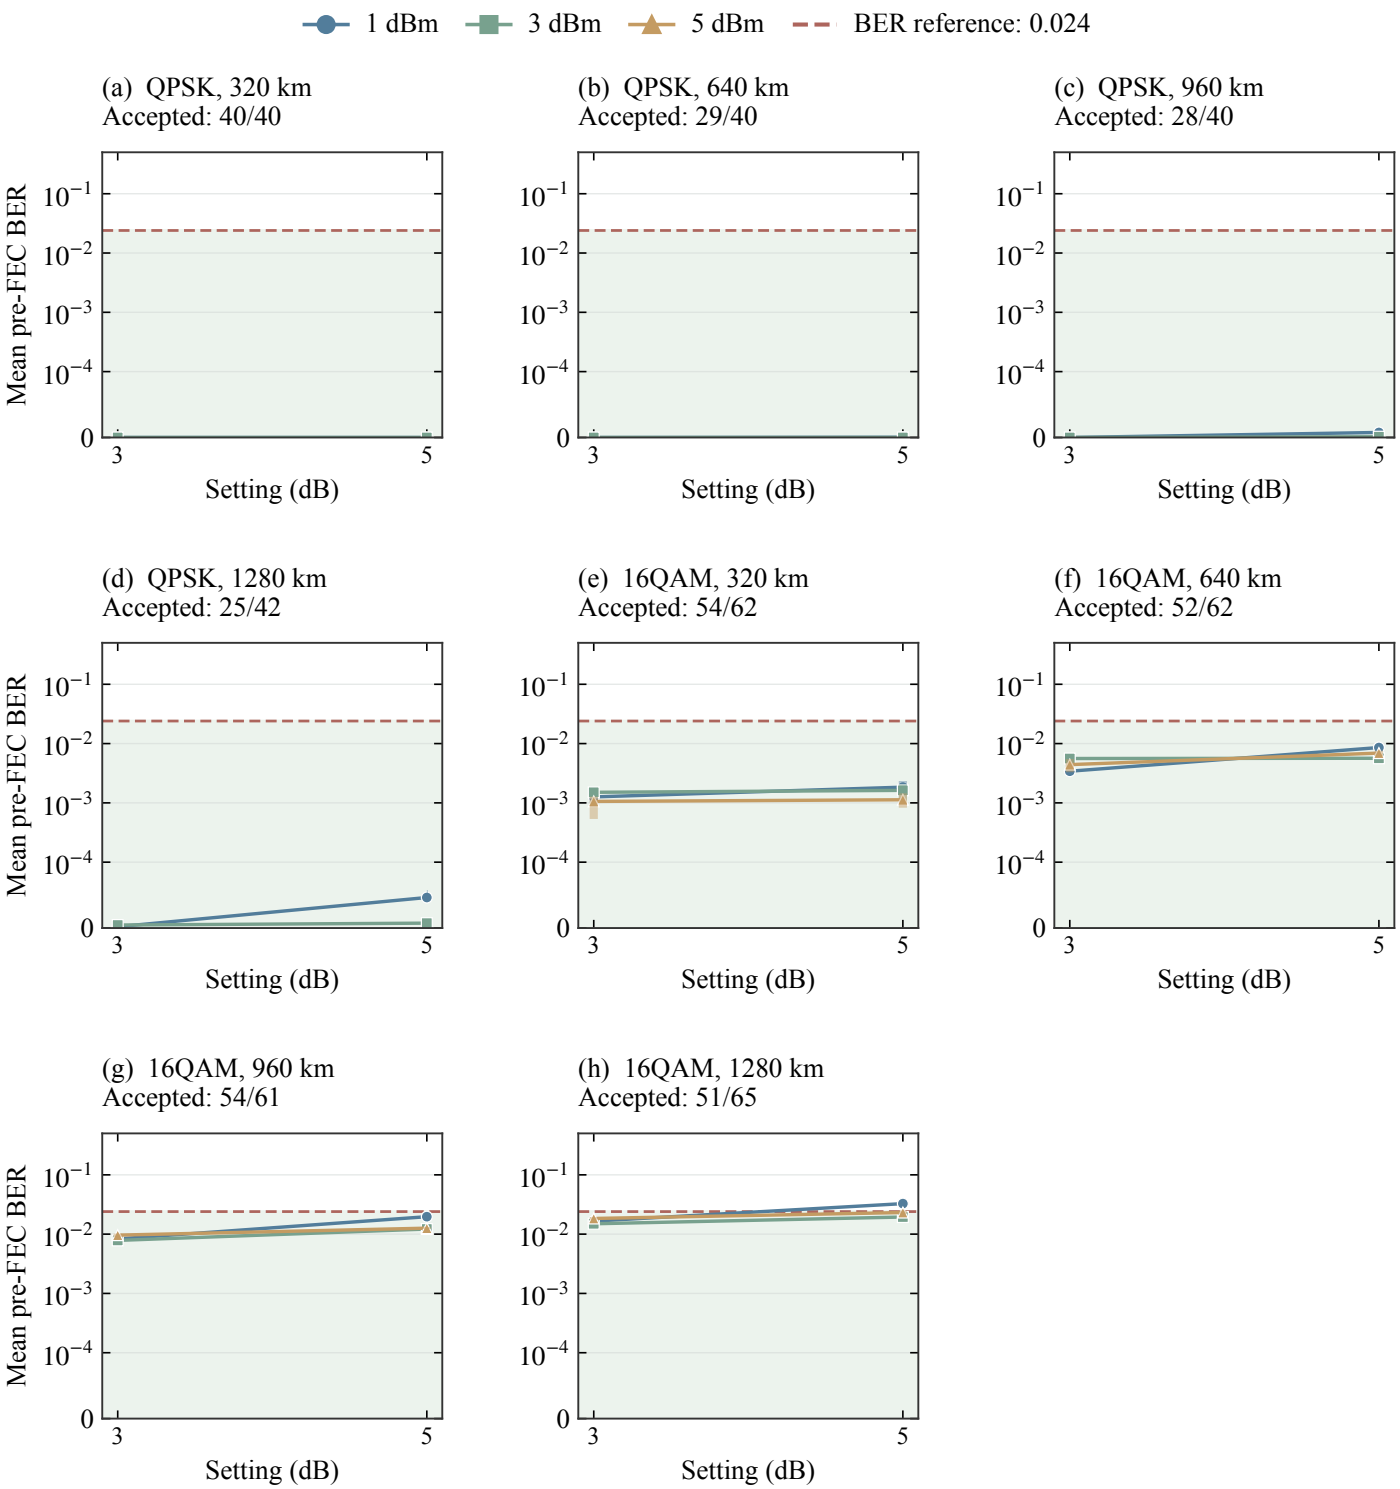

Fault panels fix modulation and distance; curves identify launch power. Points are accepted-repeat means; spans are interquartile ranges, not confidence intervals. Dashed reference: 0.024. Missing is not zero.

S2.4 | BER | EDFA gain reduction

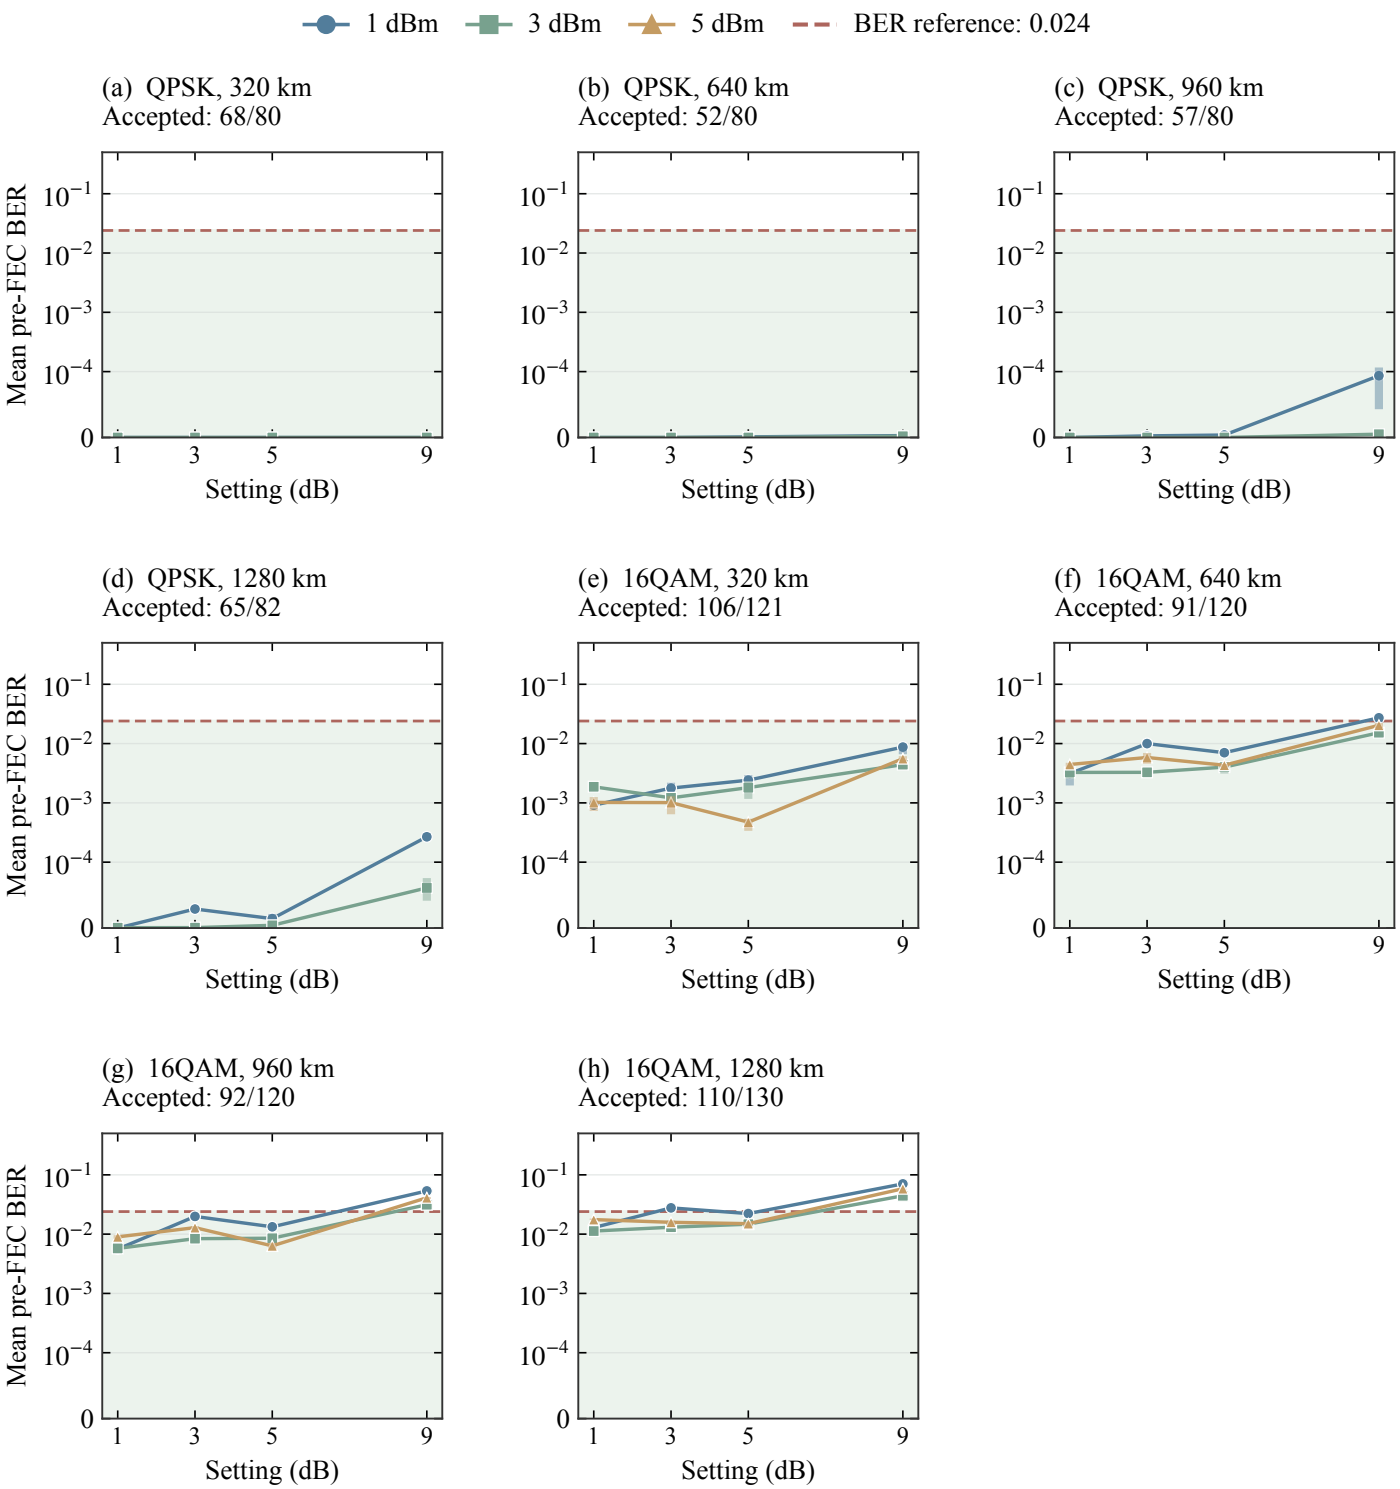

Fault panels fix modulation and distance; curves identify launch power. Points are accepted-repeat means; spans are interquartile ranges, not confidence intervals. Dashed reference: 0.024. Missing is not zero.

S2.5 | BER | WSS center offset

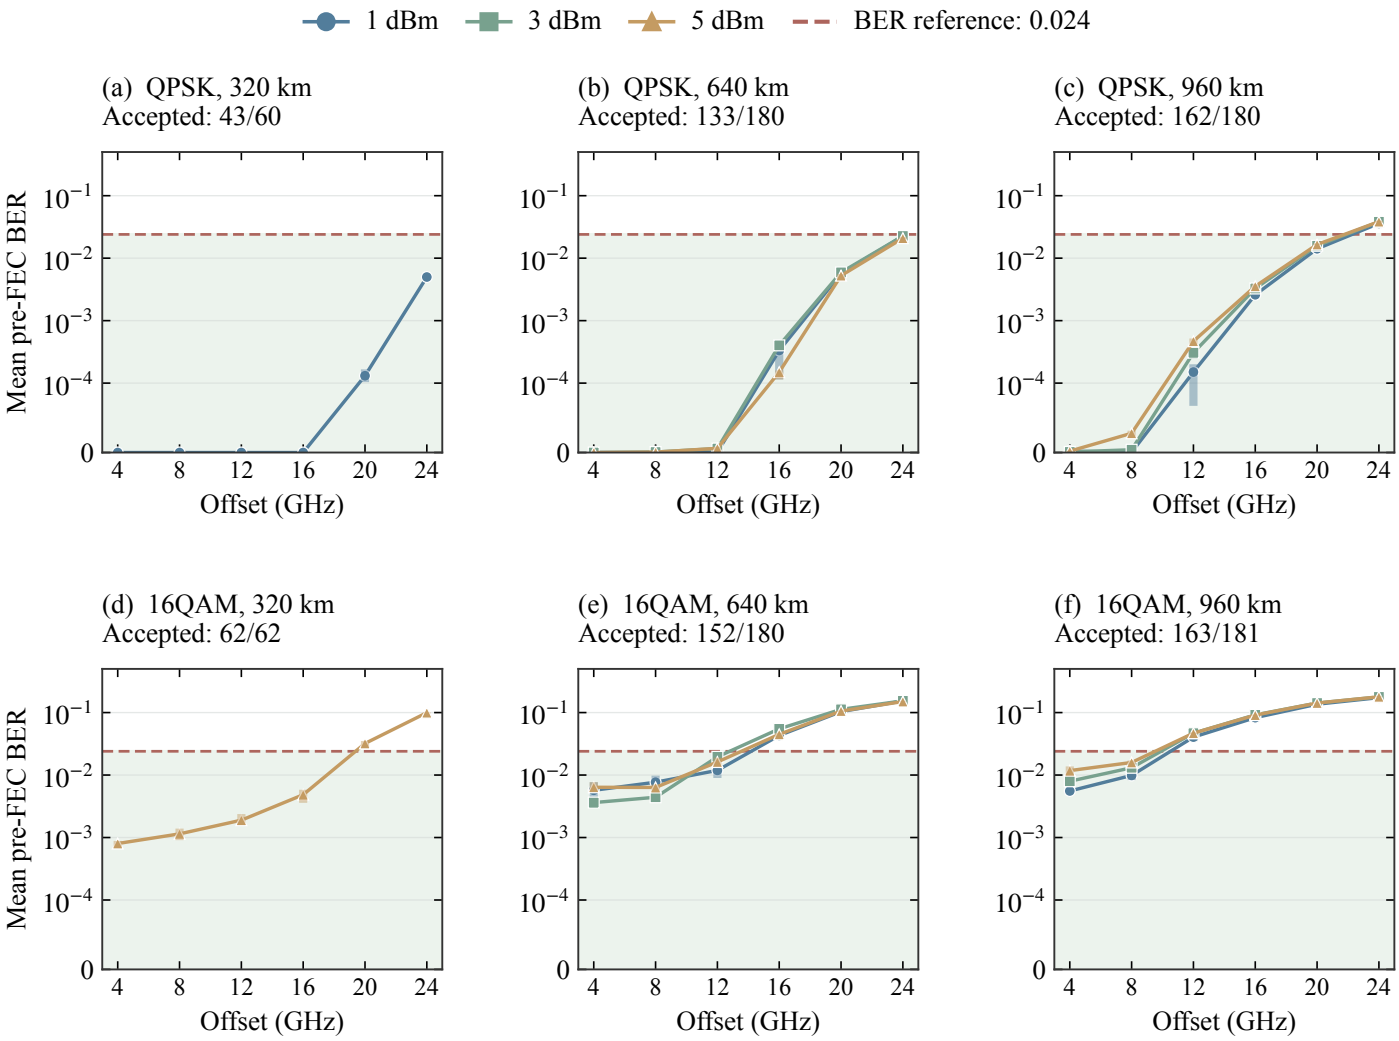

Comparative WSS-offset curves omit the sparse 1280-km series; those acquisitions remain in the complete configuration index and full primary dataset. Points and spans use accepted repeats.

S2.6 | BER | WSS bandwidth narrowing

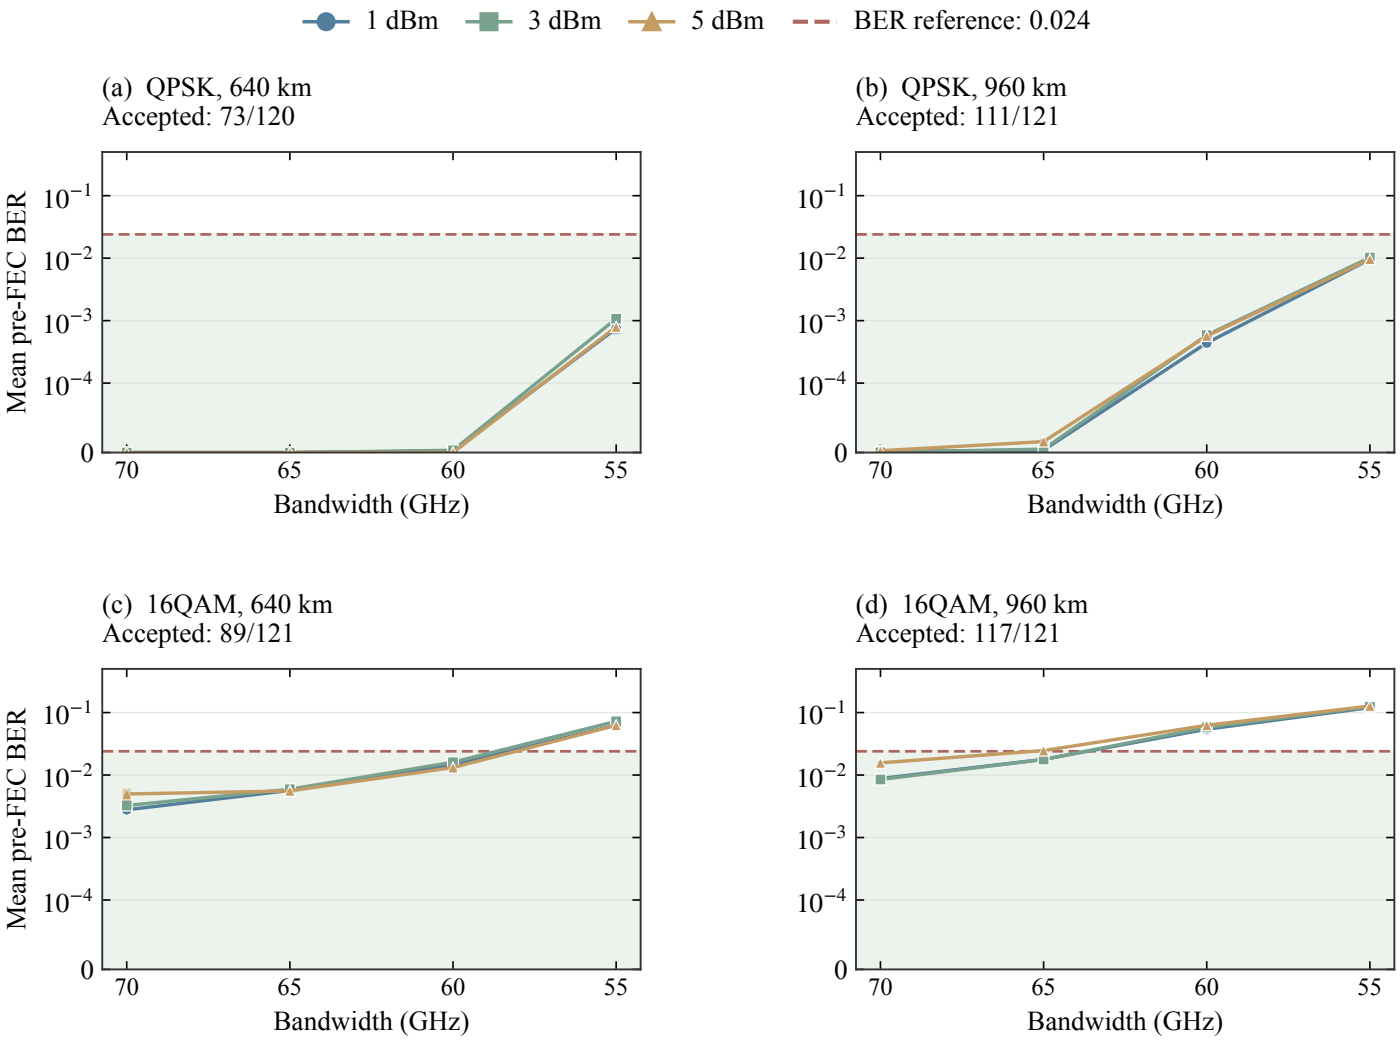

Fault panels fix modulation and distance; curves identify launch power. Points are accepted-repeat means; spans are interquartile ranges, not confidence intervals. Dashed reference: 0.024. Missing is not zero.

S2.7 | BER versus setting | QPSK and 16QAM at 640/960 km

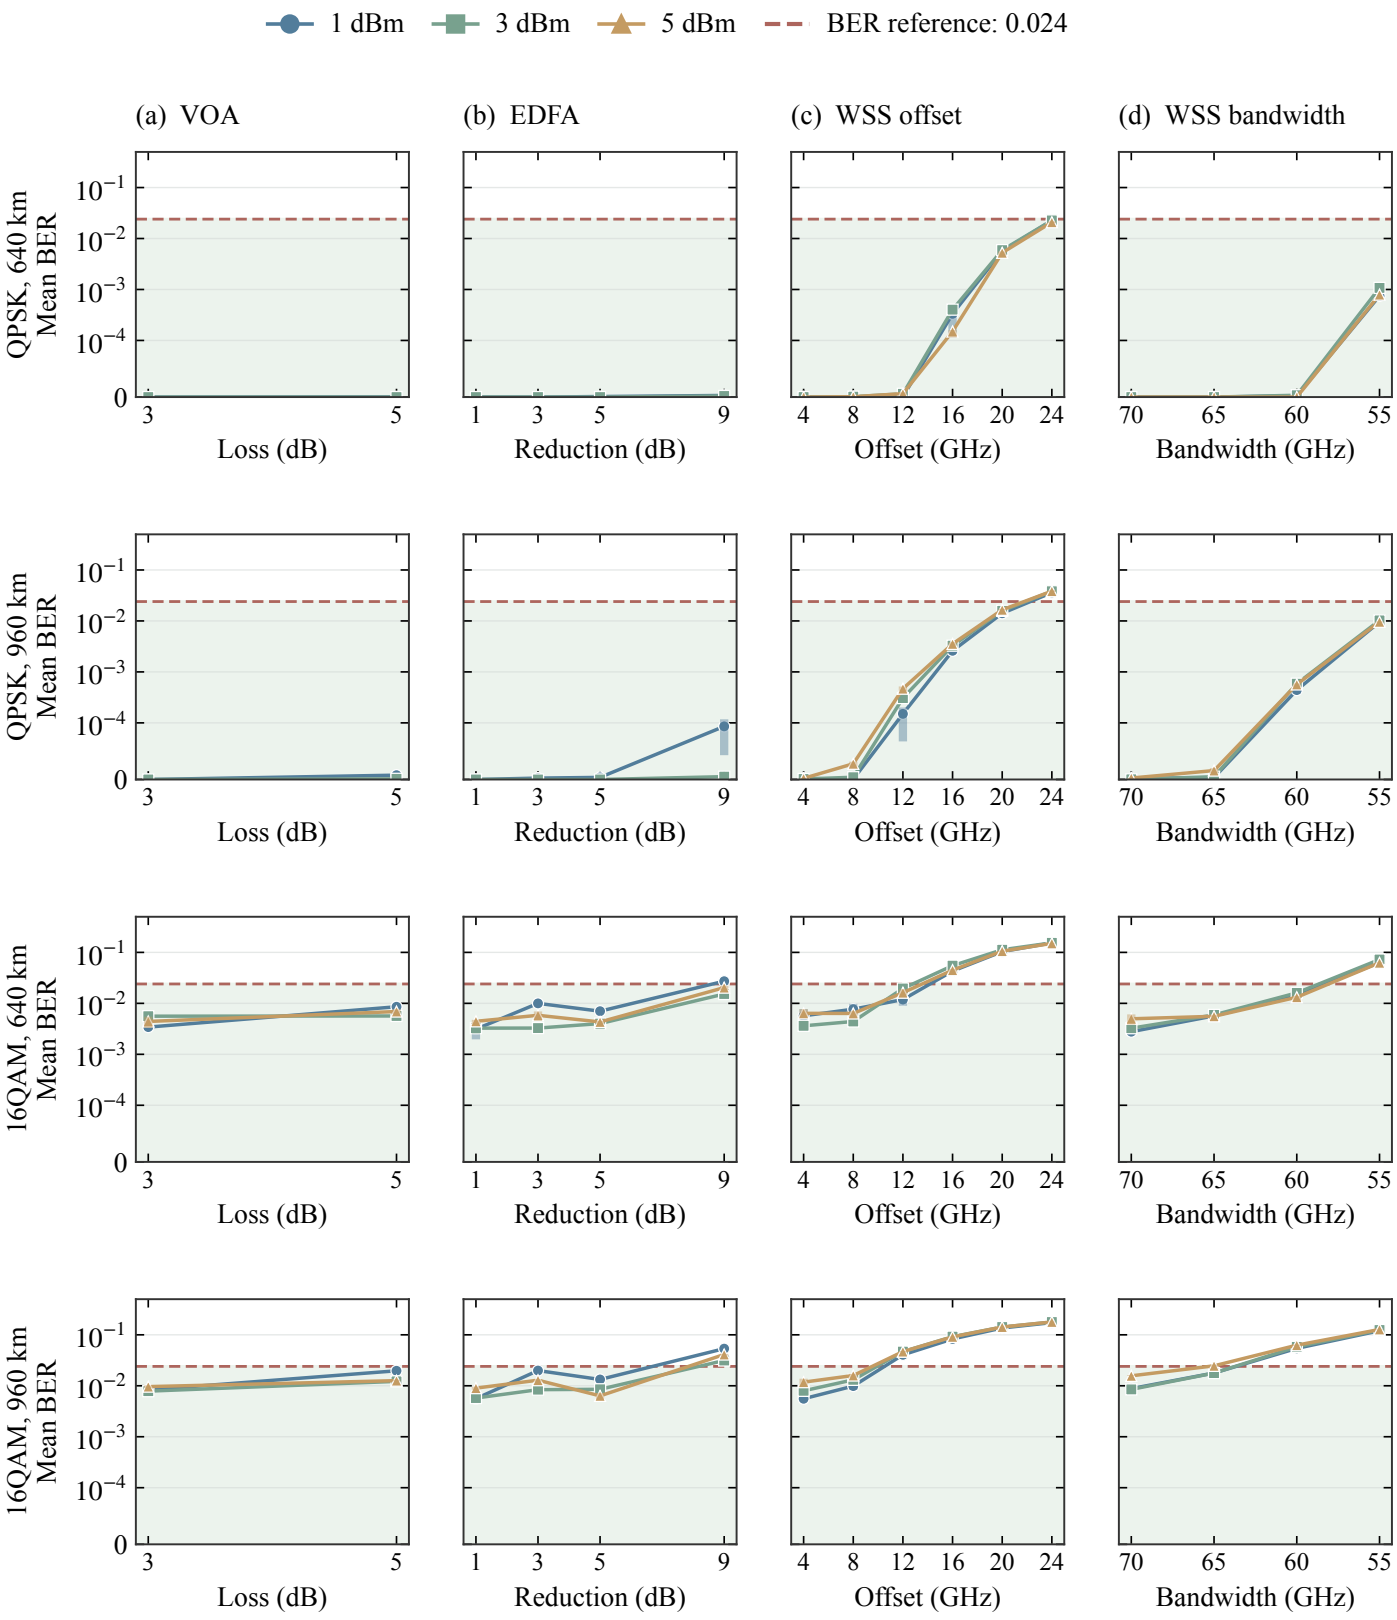

Fault panels fix modulation and distance; curves identify launch power. Points are accepted-repeat means; spans are interquartile ranges, not confidence intervals. Dashed reference: 0.024. Missing is not zero.

S2.8 | Recovered constellations | all 17 settings

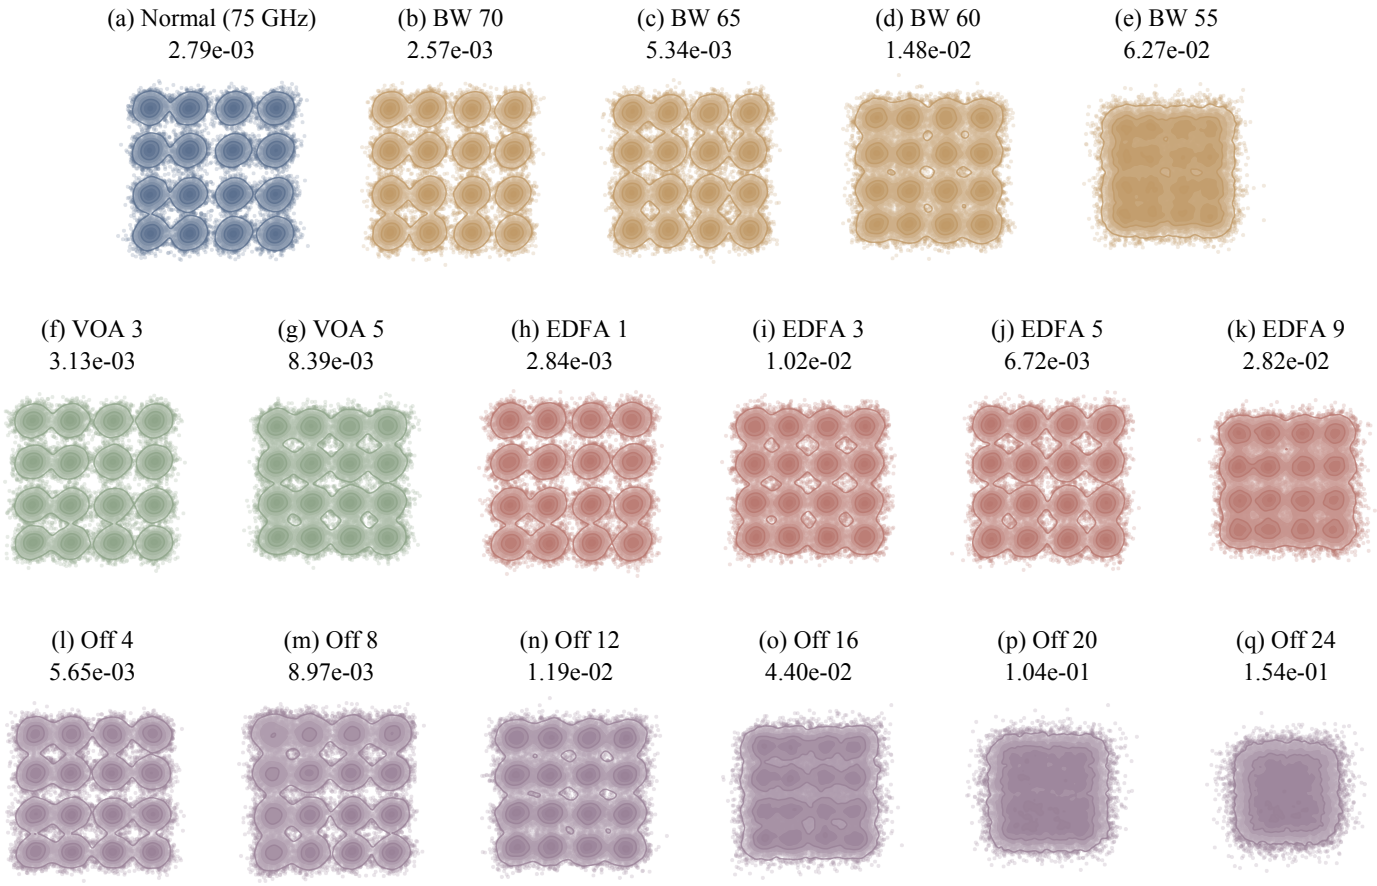

Results are grouped by the operating conditions and evaluation protocol indicated in the figure. Configuration identifiers link the figures to the accompanying data tables.

S3.1 | Five-class recognition versus setting

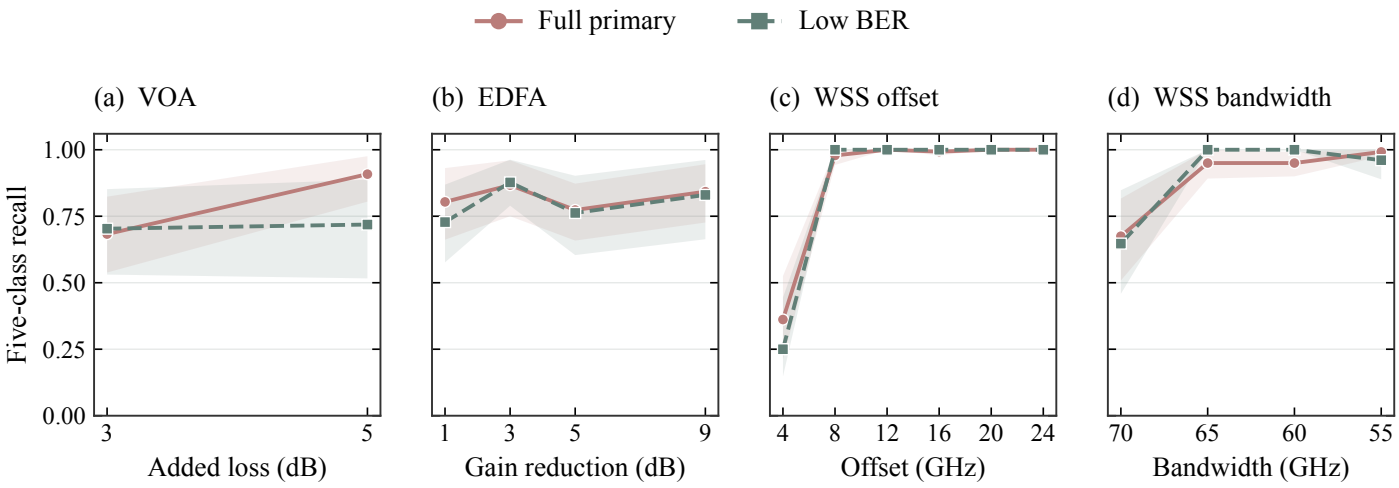

Five-class recall versus recorded fault setting for fixed LightGBM. Each mechanism uses operating-condition cells represented at all its settings, determined separately for the full and low-BER cohorts. Shaded regions are 95% configuration-bootstrap intervals.

S3.2 | Binary detection versus setting

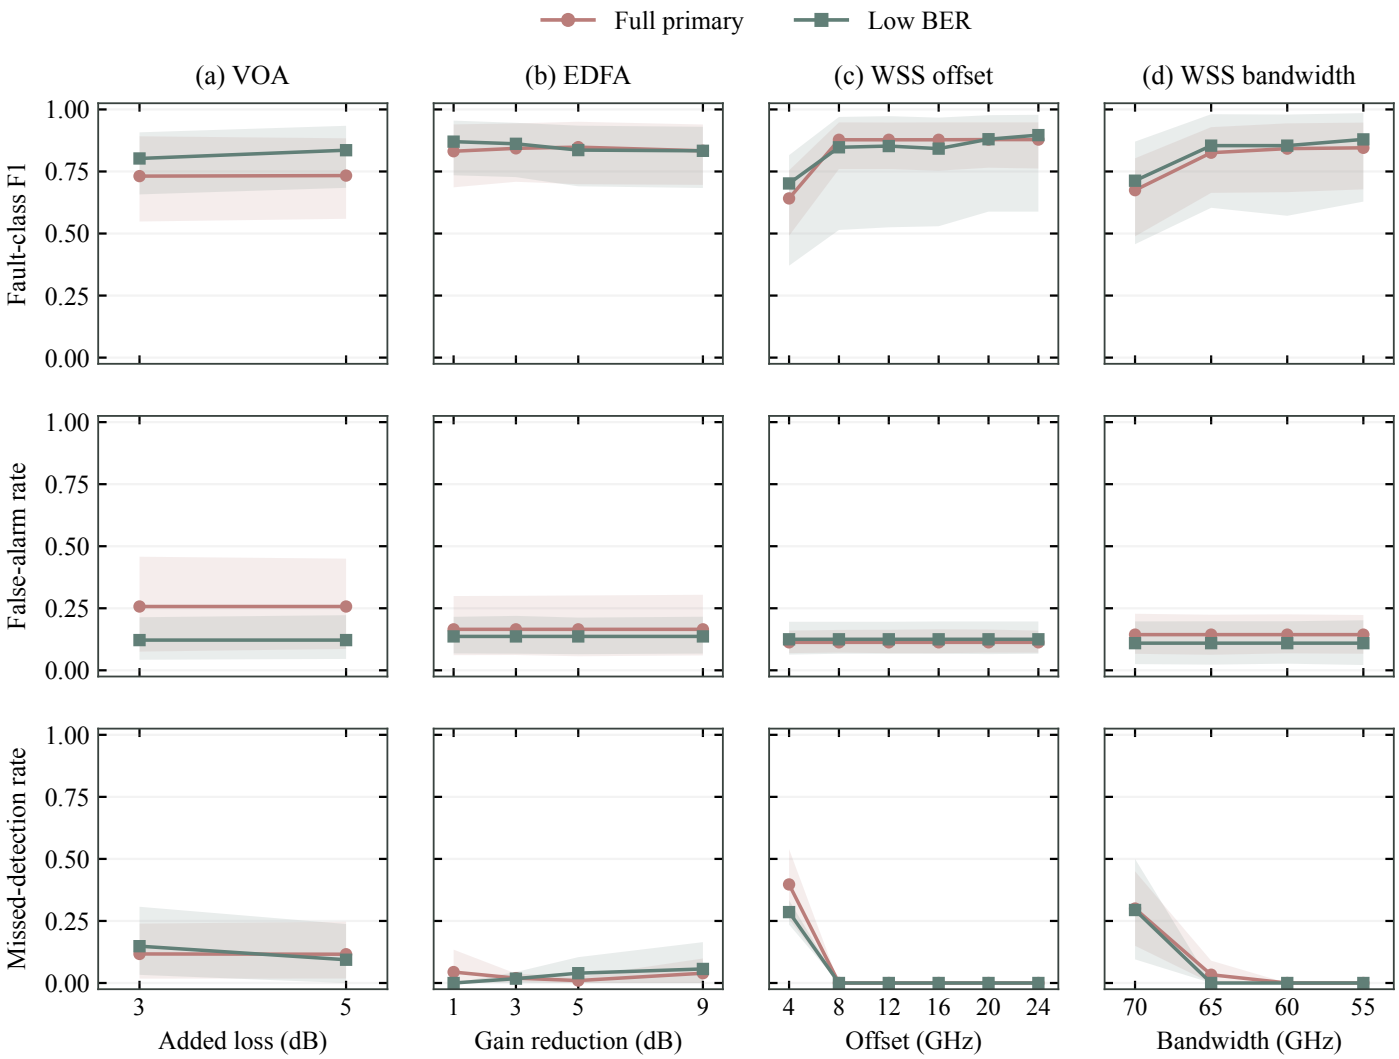

Setting-resolved normal-versus-one-mechanism detection with fixed LightGBM. Rows show fault-class F1, normal false-alarm rate, and fault missed-detection rate; columns identify the four mechanisms. Full and low-BER curves each use their common operating conditions. Shading gives 95% configuration-bootstrap intervals.

S3.3 | Exact-condition detection | exact magnitude full primary attenuation

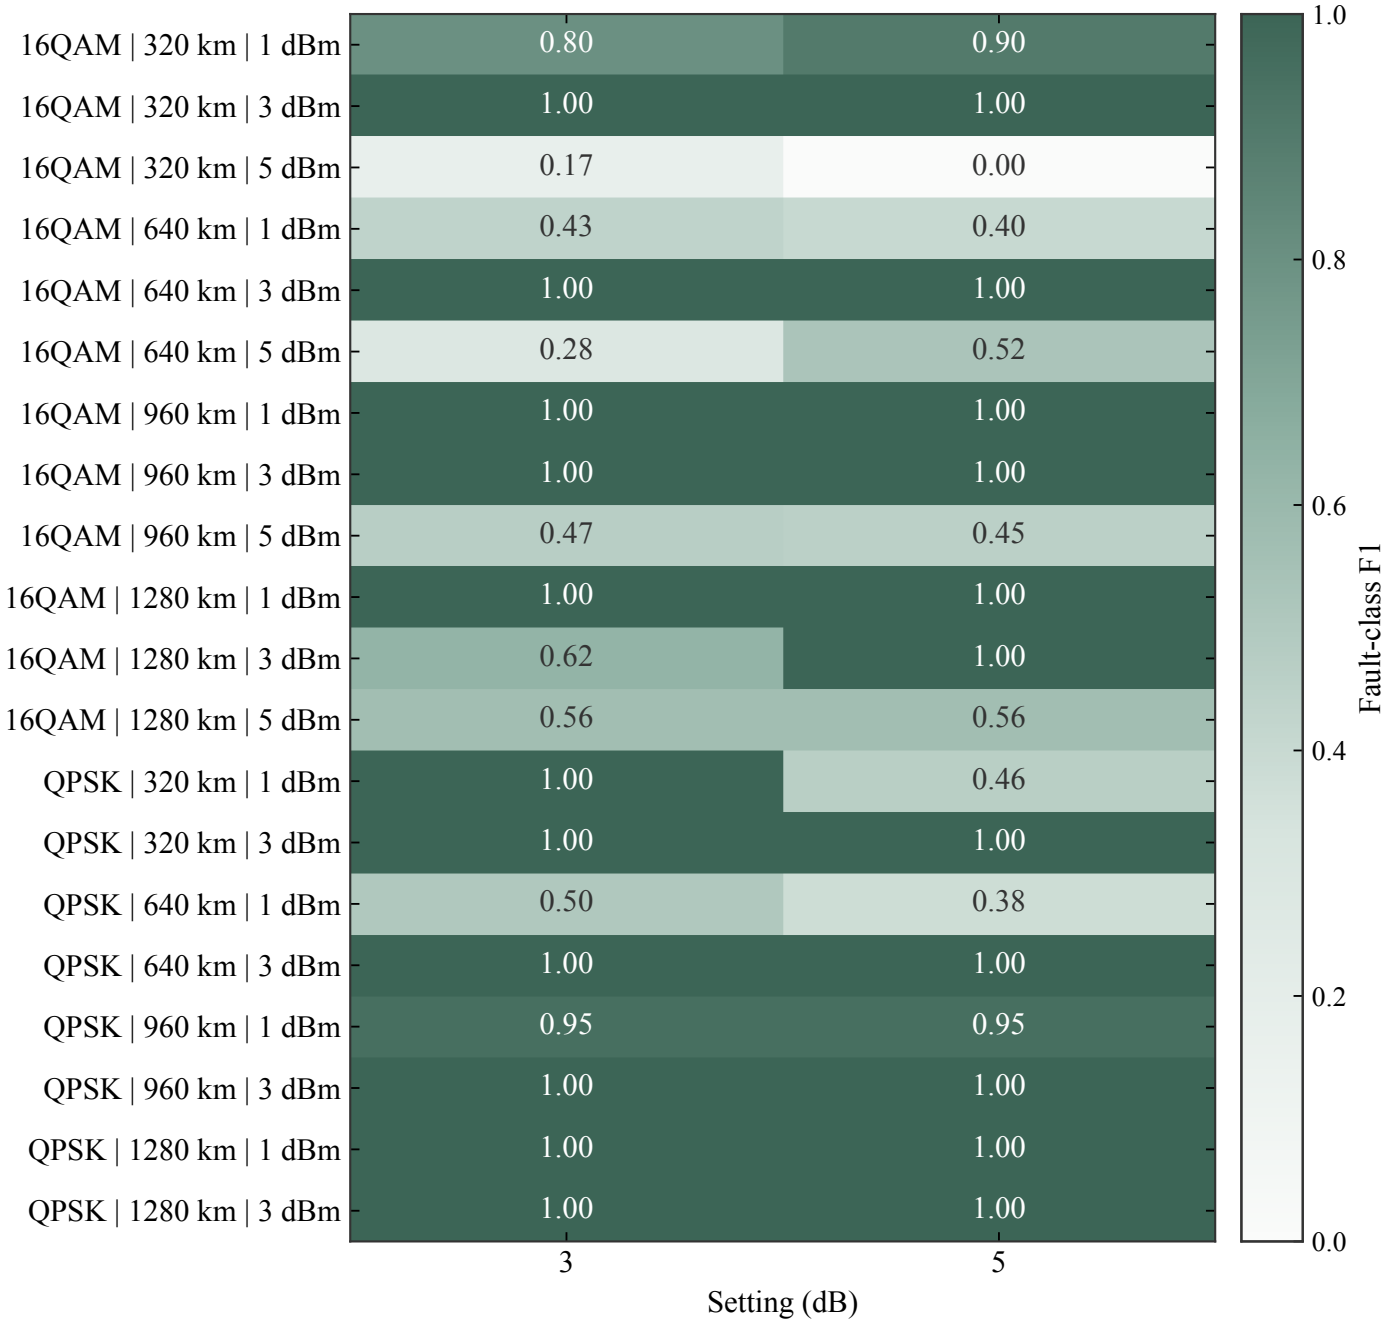

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.4 | Exact-condition detection | exact magnitude full primary edfa

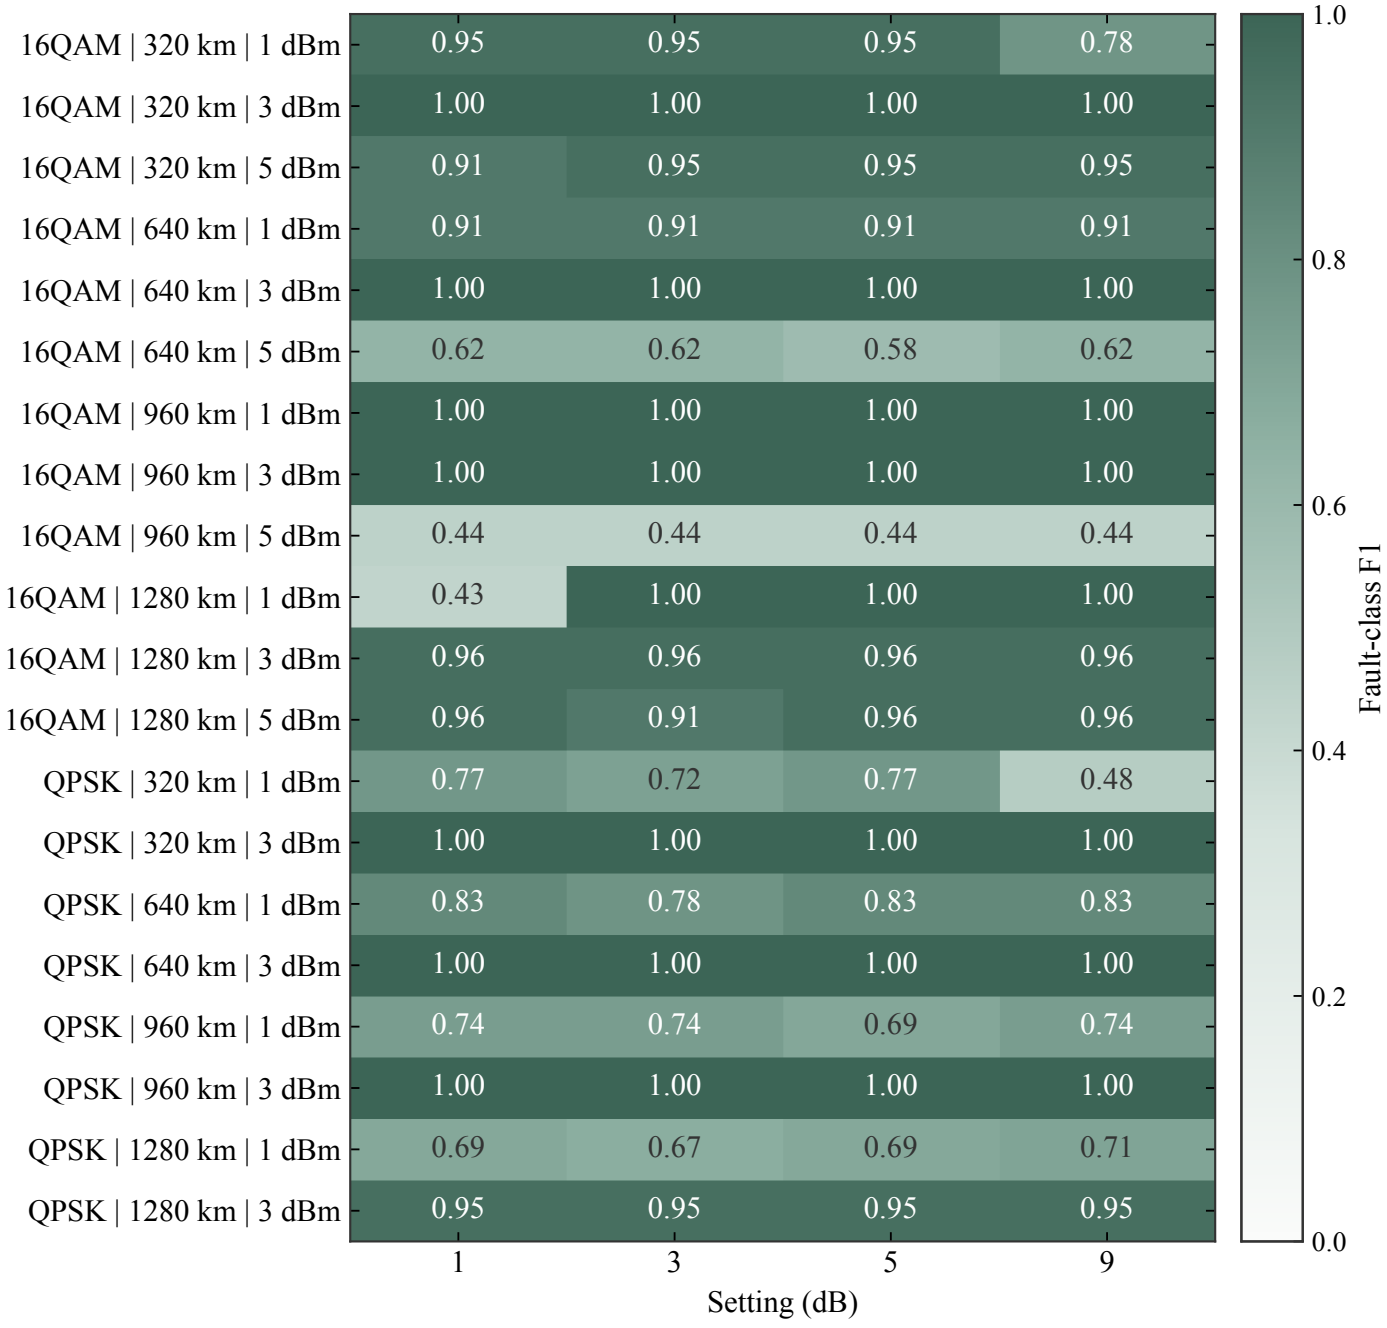

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.5 | Exact-condition detection | exact magnitude full primary wss bandwidth

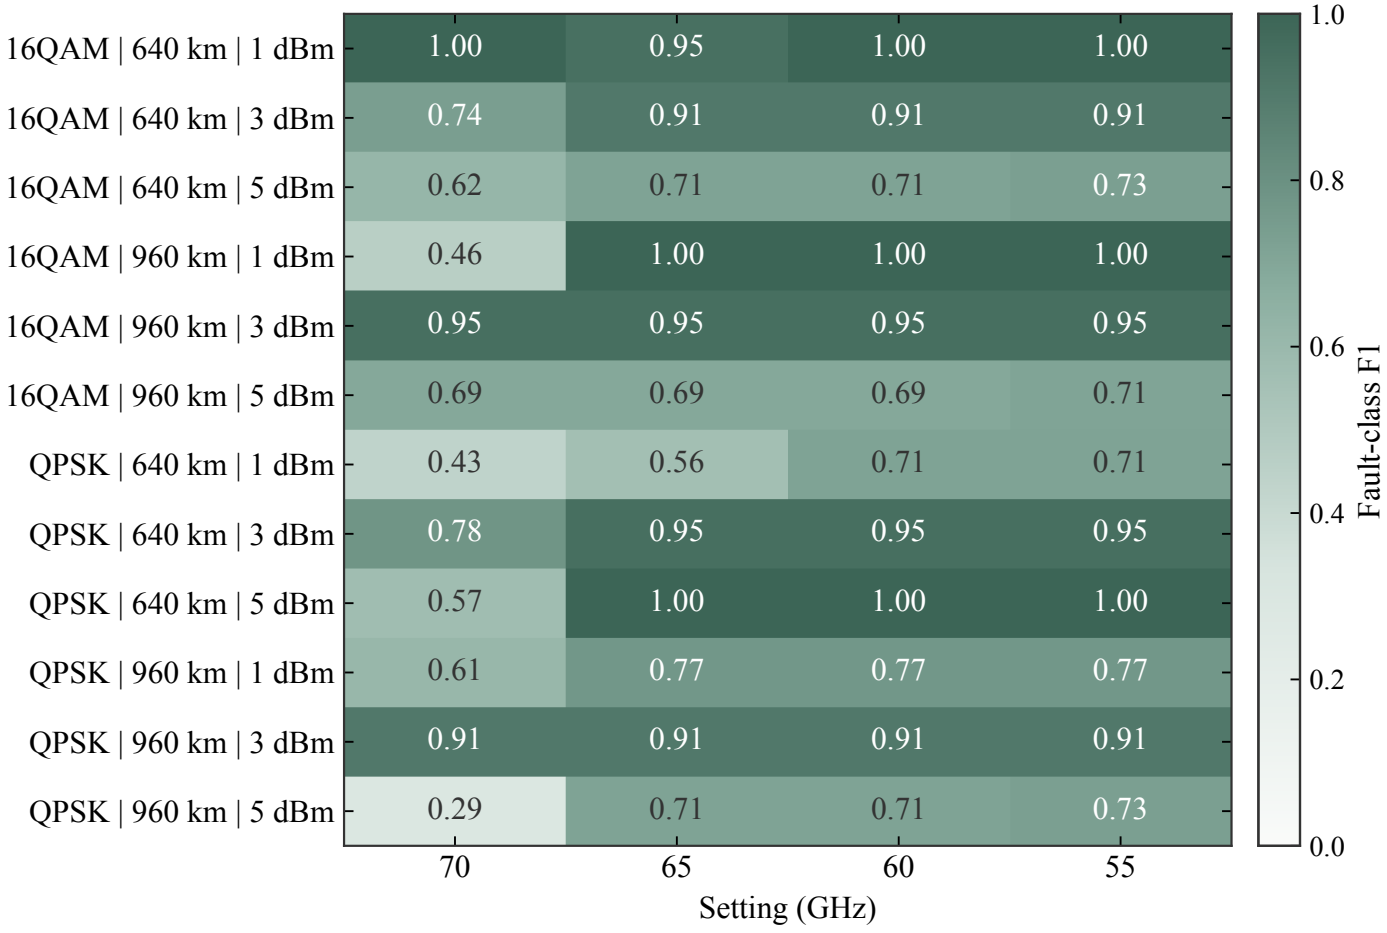

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.6 | Exact-condition detection | exact magnitude full primary wss offset

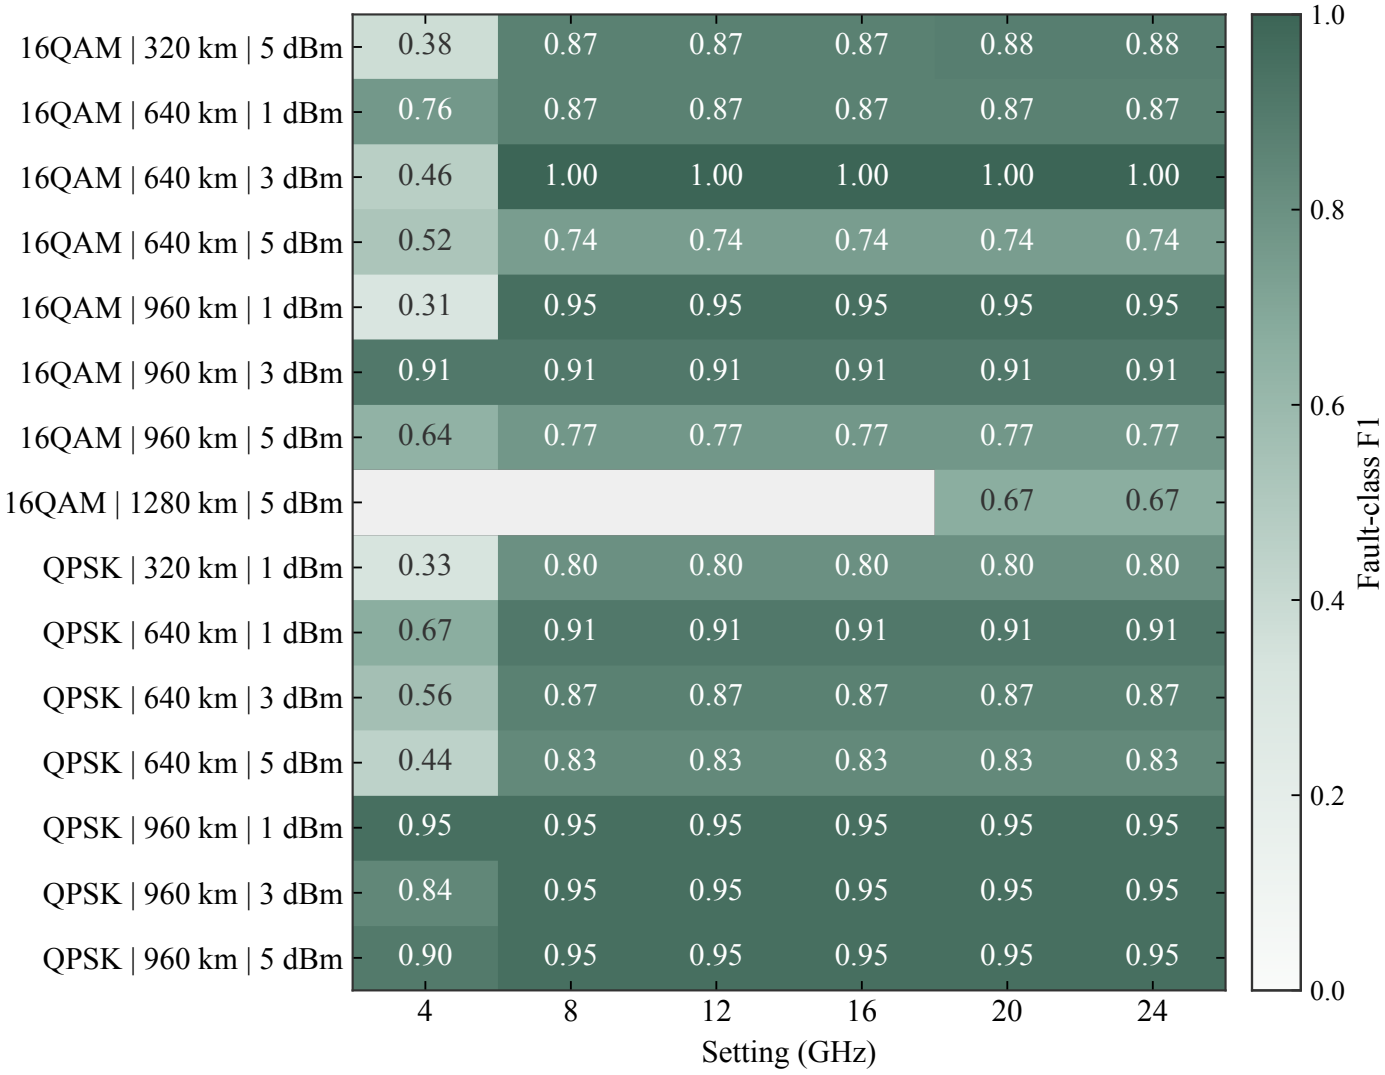

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.7 | Exact-condition detection | exact magnitude low BER attenuation

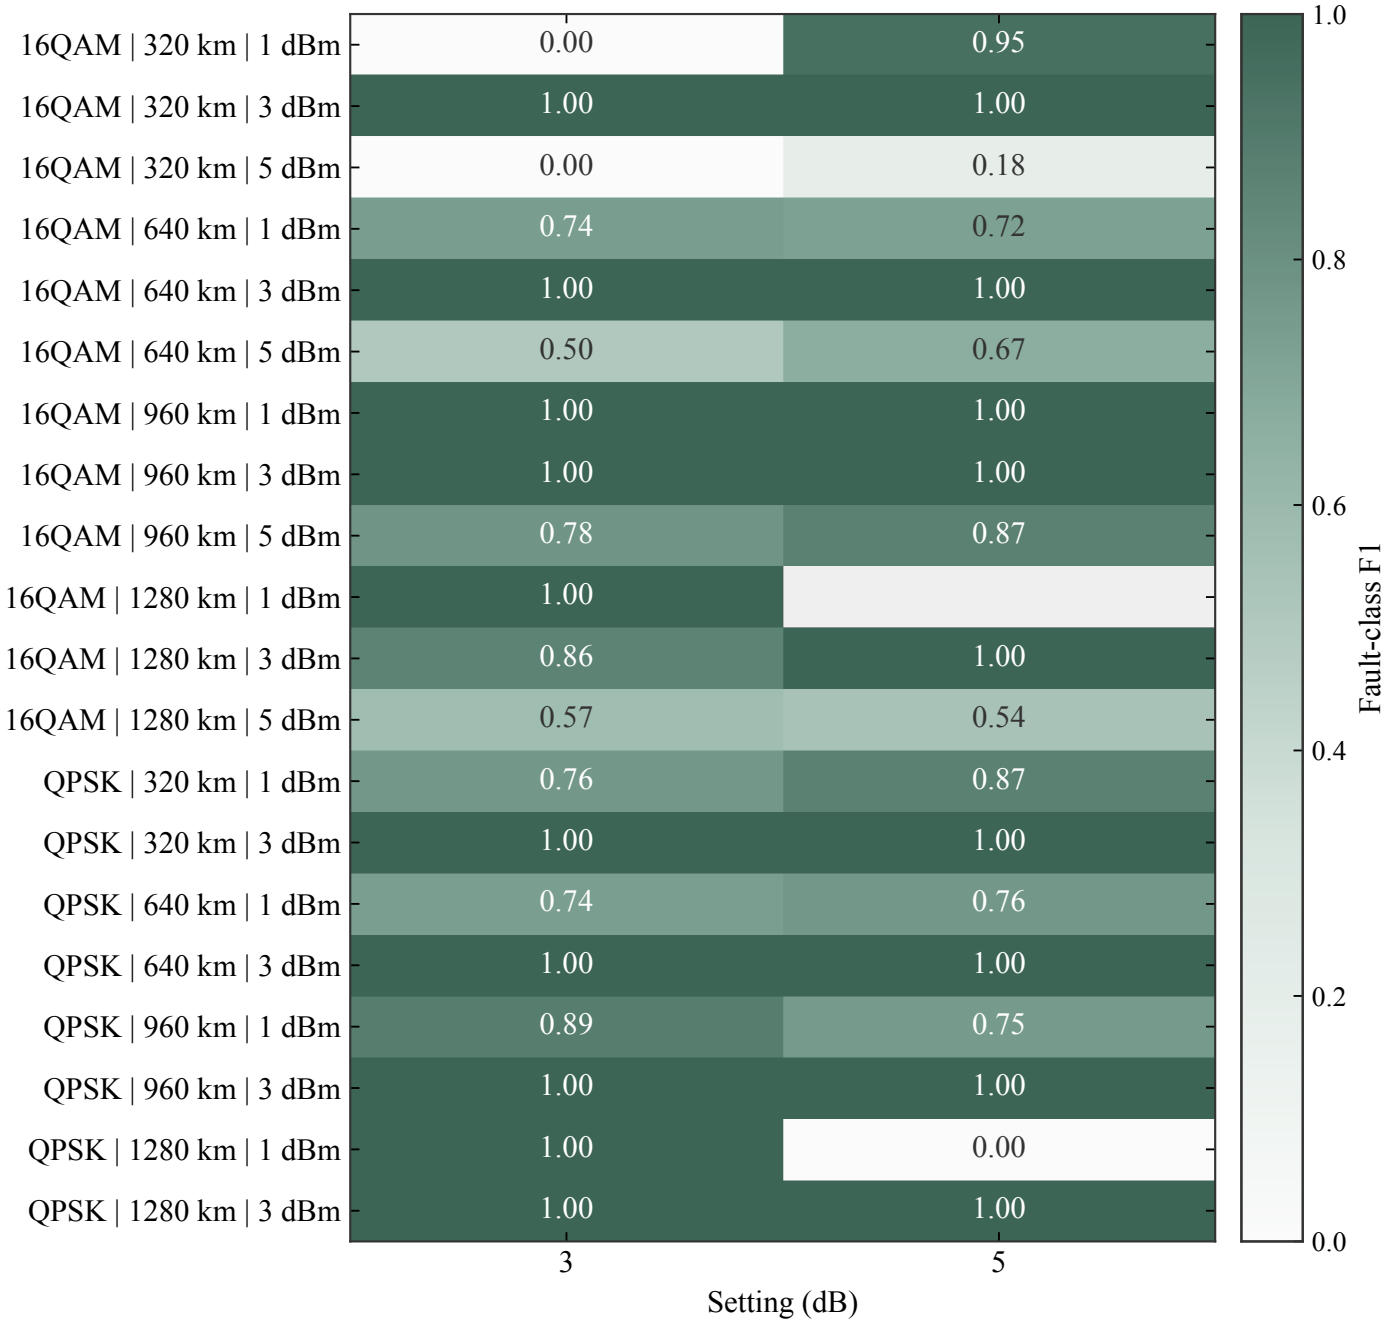

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.8 | Exact-condition detection | exact magnitude low BER edfa

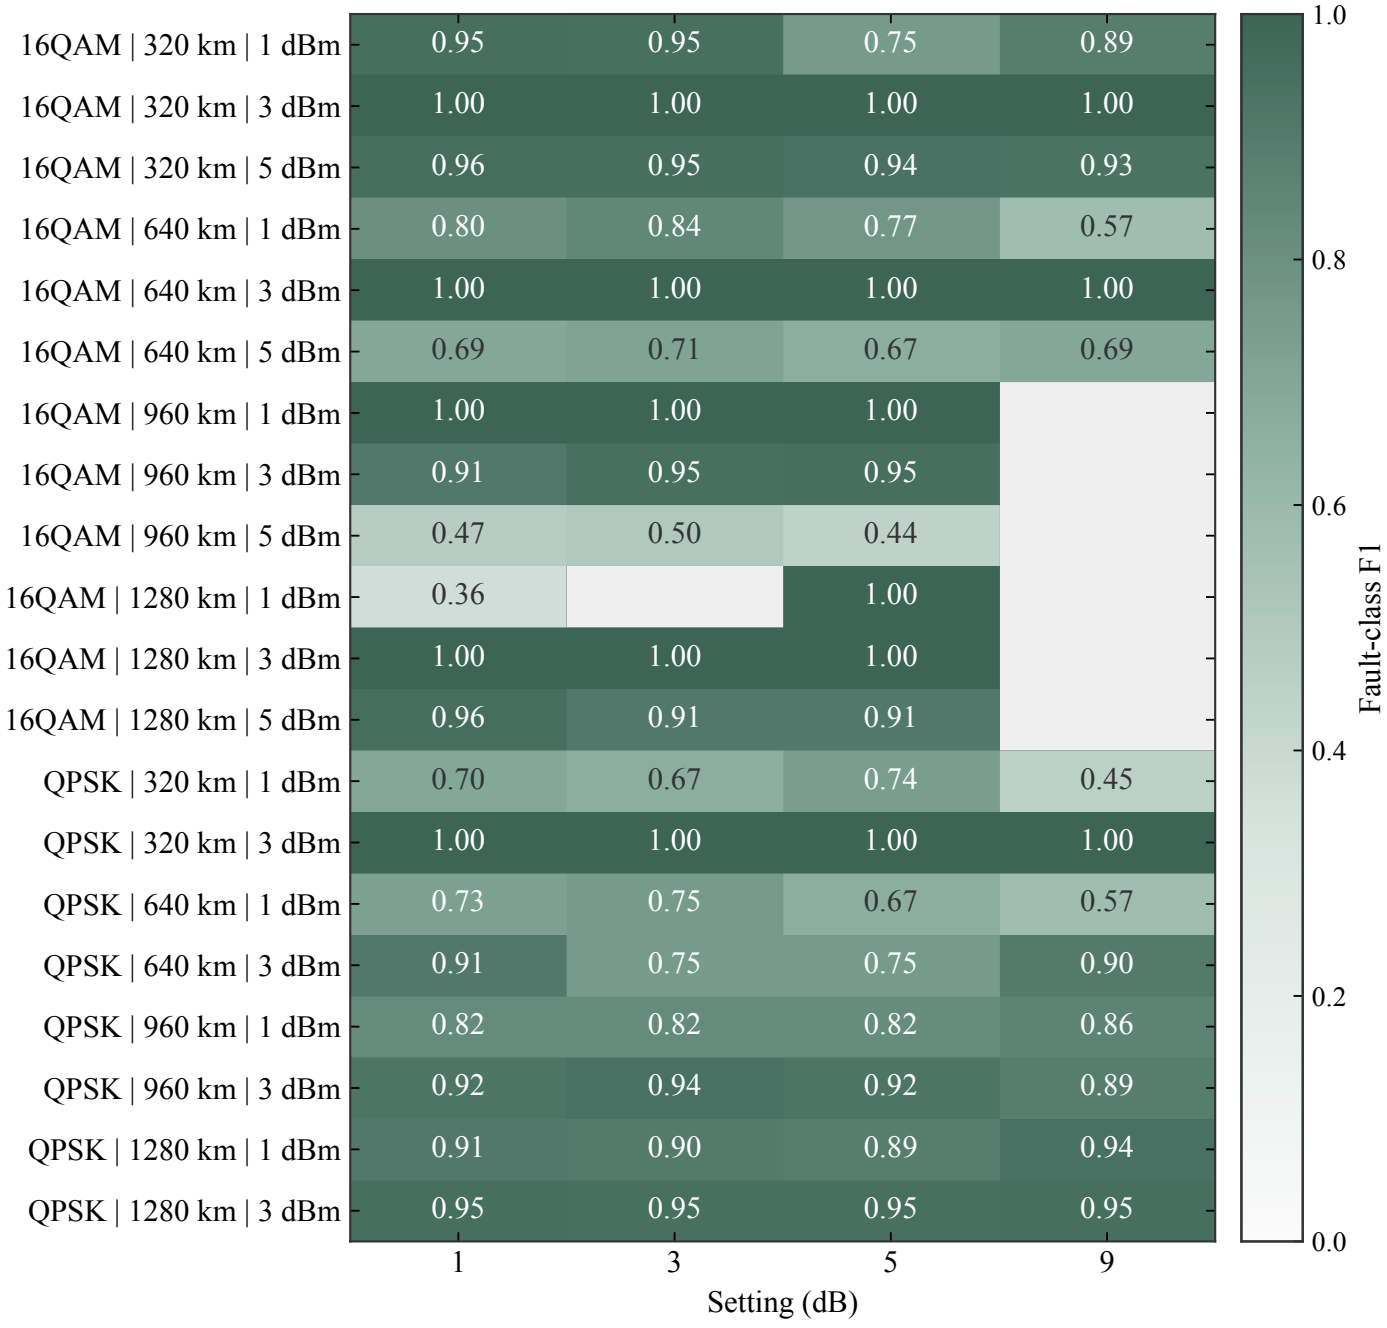

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.9 | Exact-condition detection | exact magnitude low BER wss bandwidth

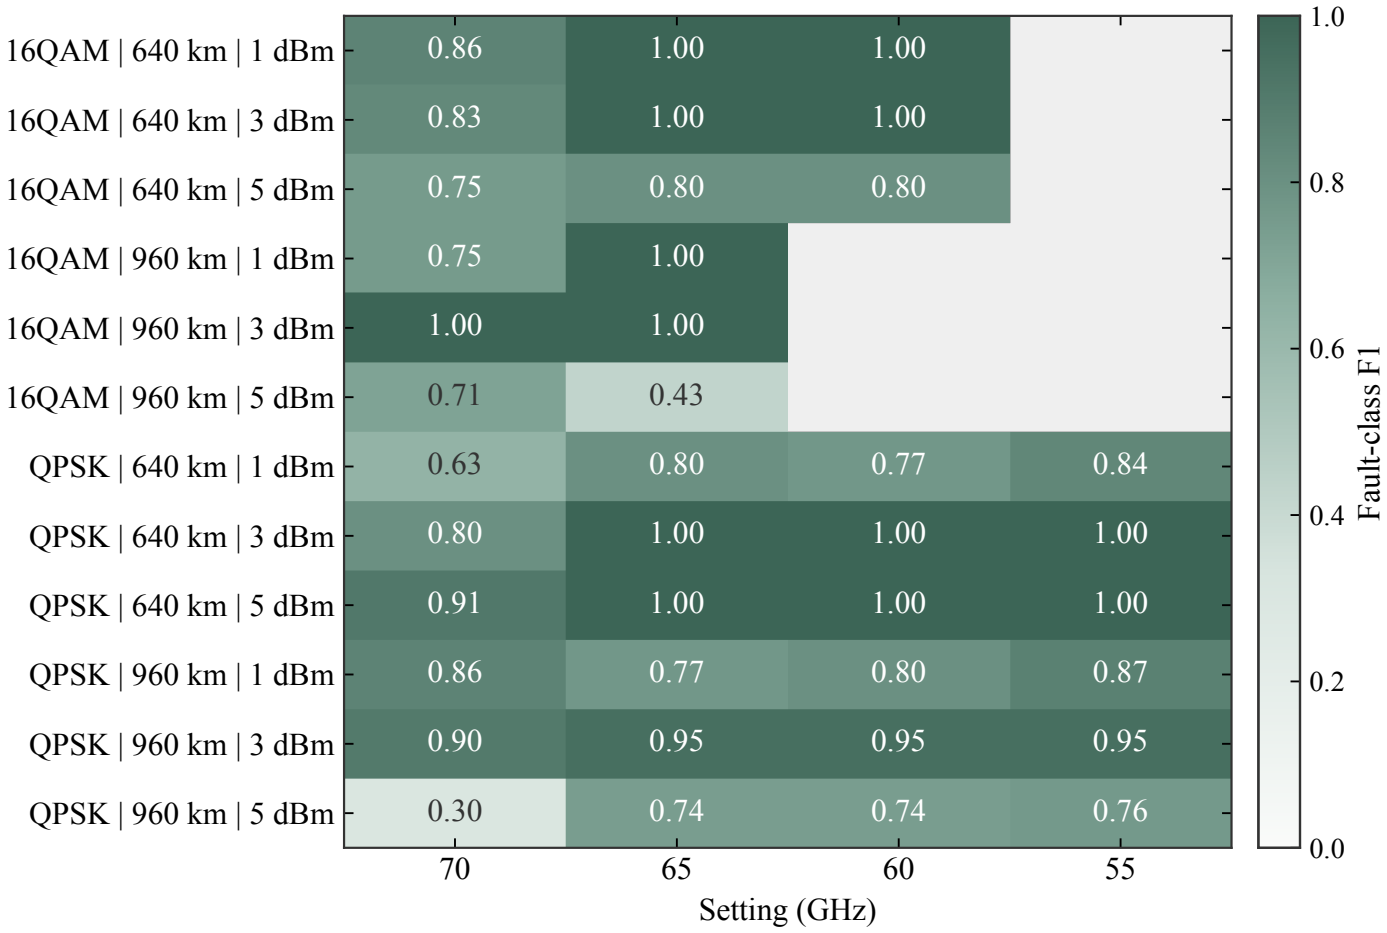

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S3.10 | Exact-condition detection | exact magnitude low BER wss offset

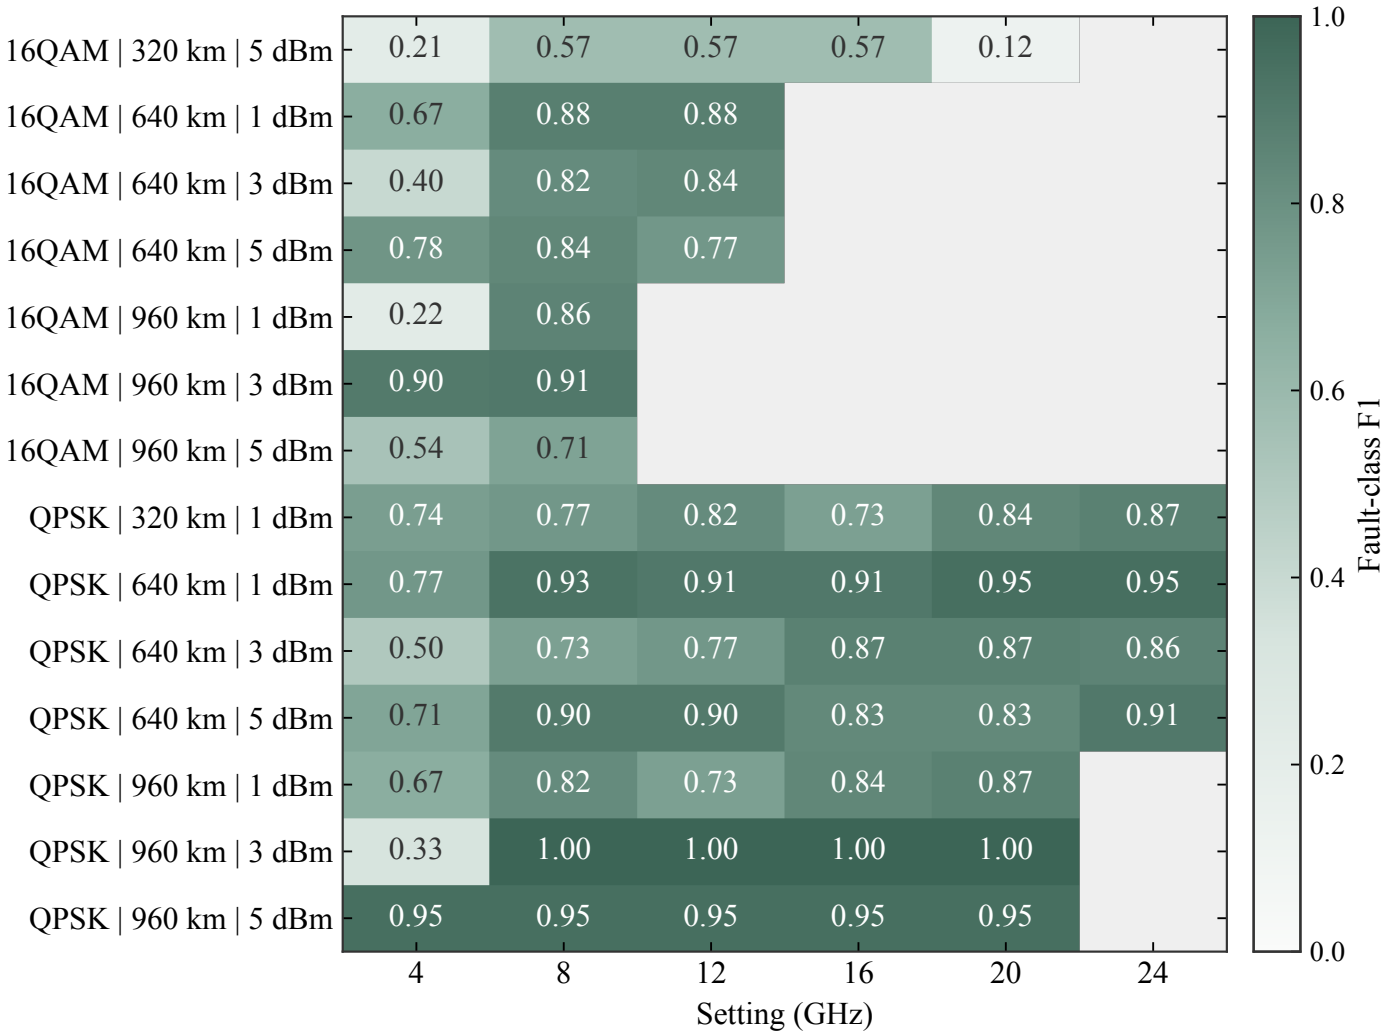

Each row fixes distance, modulation and launch power. Color encodes binary fault-class F1. Gray cells lack eligible paired support; sparse rows are descriptive.

S4.1 | Signal versus metadata and power controls

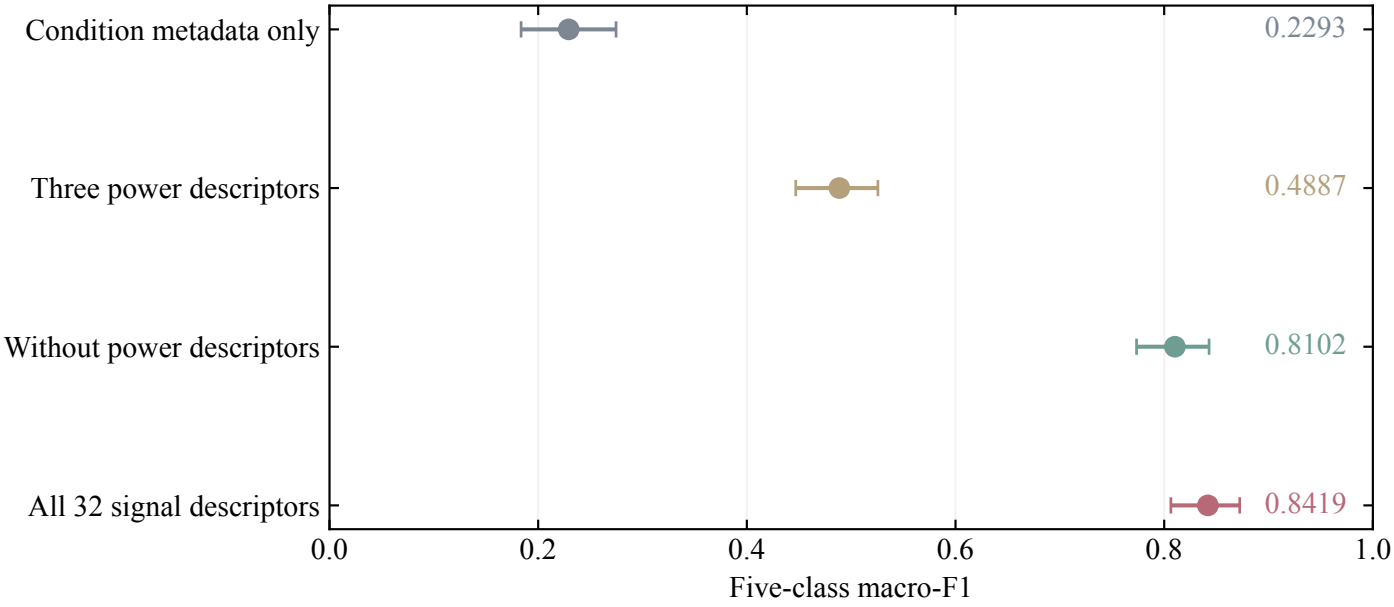

Results are grouped by the operating conditions and evaluation protocol indicated in the figure. Configuration identifiers link the figures to the accompanying data tables.

S4.2 | Paired distance transfer with and without spectra

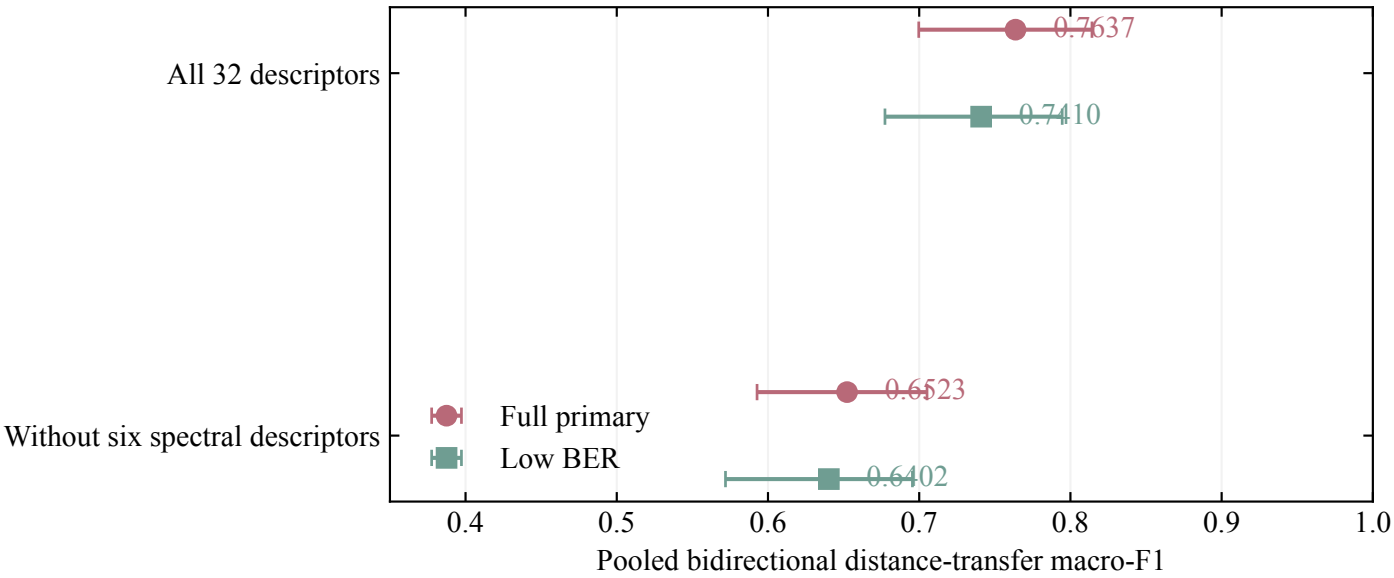

Results are grouped by the operating conditions and evaluation protocol indicated in the figure. Configuration identifiers link the figures to the accompanying data tables.

S5.1 | Acquisition-date and training-cohort comparisons

Acquisition-date grouping: one date contains 990 captures (989 at 5 dBm; one launch-power value unrecorded). The other contains 2365 captures (1214 at 1 dBm; 1151 at 3 dBm). Bidirectional full-set macro-F1 values are 0.4960 and 0.2887; pooled values are 0.4064 for the full set and 0.4142 for the low-BER set. Date and launch power change together. This is a combined-condition stress test, not an isolated date effect or an independent-session evaluation.

Paired low-BER test membership: full-cohort training gives 0.8194 macro-F1, versus 0.8002 for low-BER-only training. The paired configuration-bootstrap interval for the difference is [-0.0412, -0.0007]. These predictions use inherited full-cohort folds, not the independently refolded baseline.

All results summarize saved predictions; no new raw-signal processing is implied.

S6.1 | Reference classification

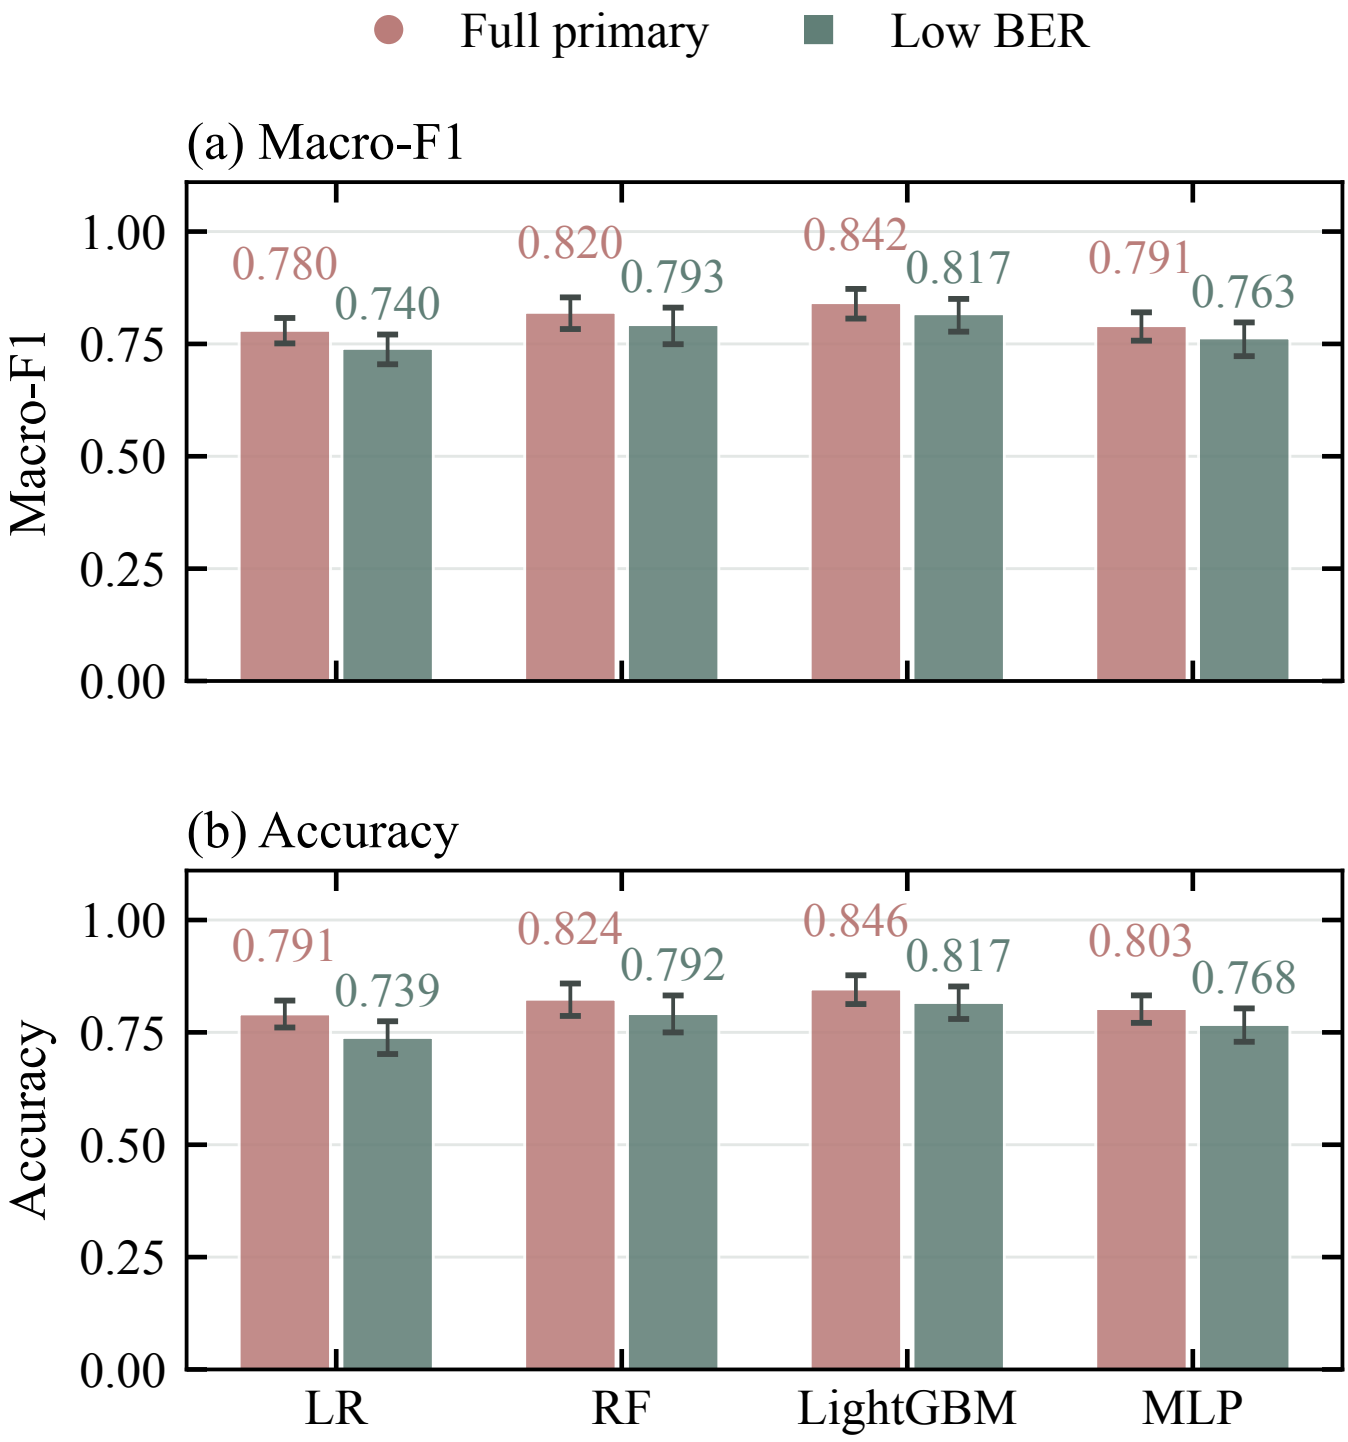

Five-class performance of logistic regression, random forest, LightGBM, and MLP under configuration-grouped evaluation: (a) macro-F1 and (b) accuracy. Rose and sage bars denote the 3355-capture primary set and the 2224-capture low-BER subset. Error bars are 95% configuration-bootstrap intervals.

S6.2 | Five-class confusion matrices

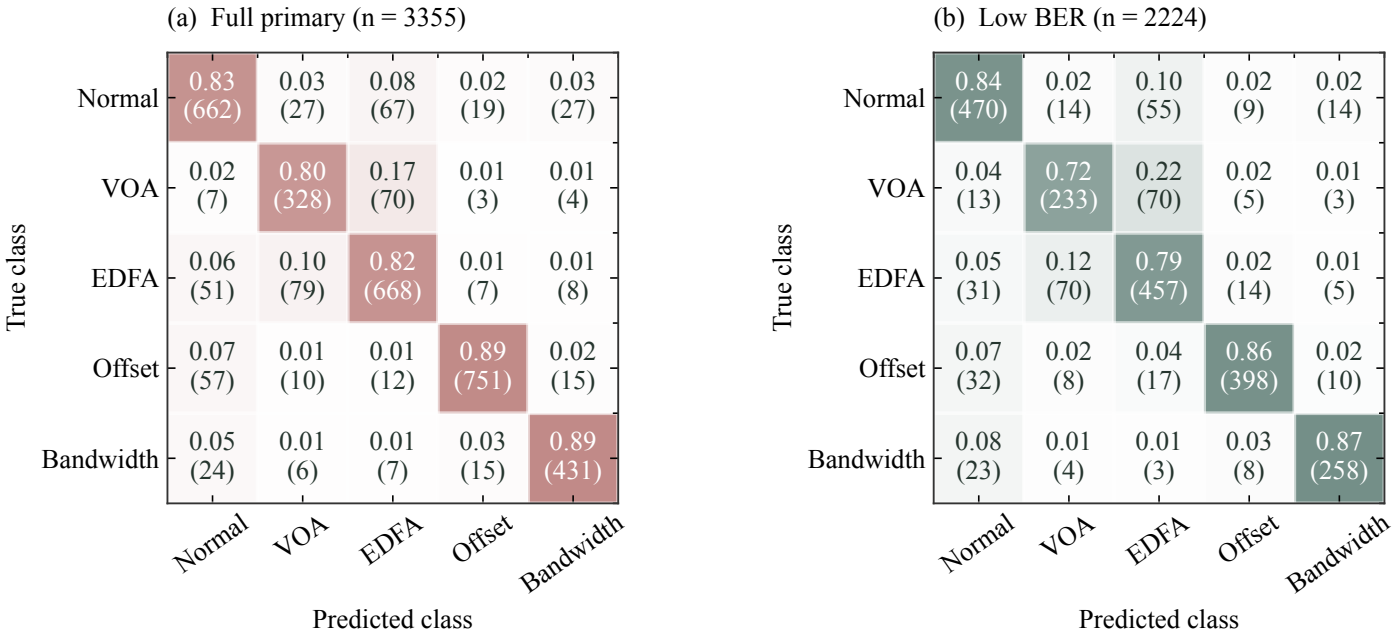

LightGBM five-class confusion matrices for the full primary and low-BER cohorts. Cells show row-normalized proportions and capture counts in parentheses. The matrices and scalar metrics use the same out-of-fold predictions.

S6.3 | Signal-representation comparison

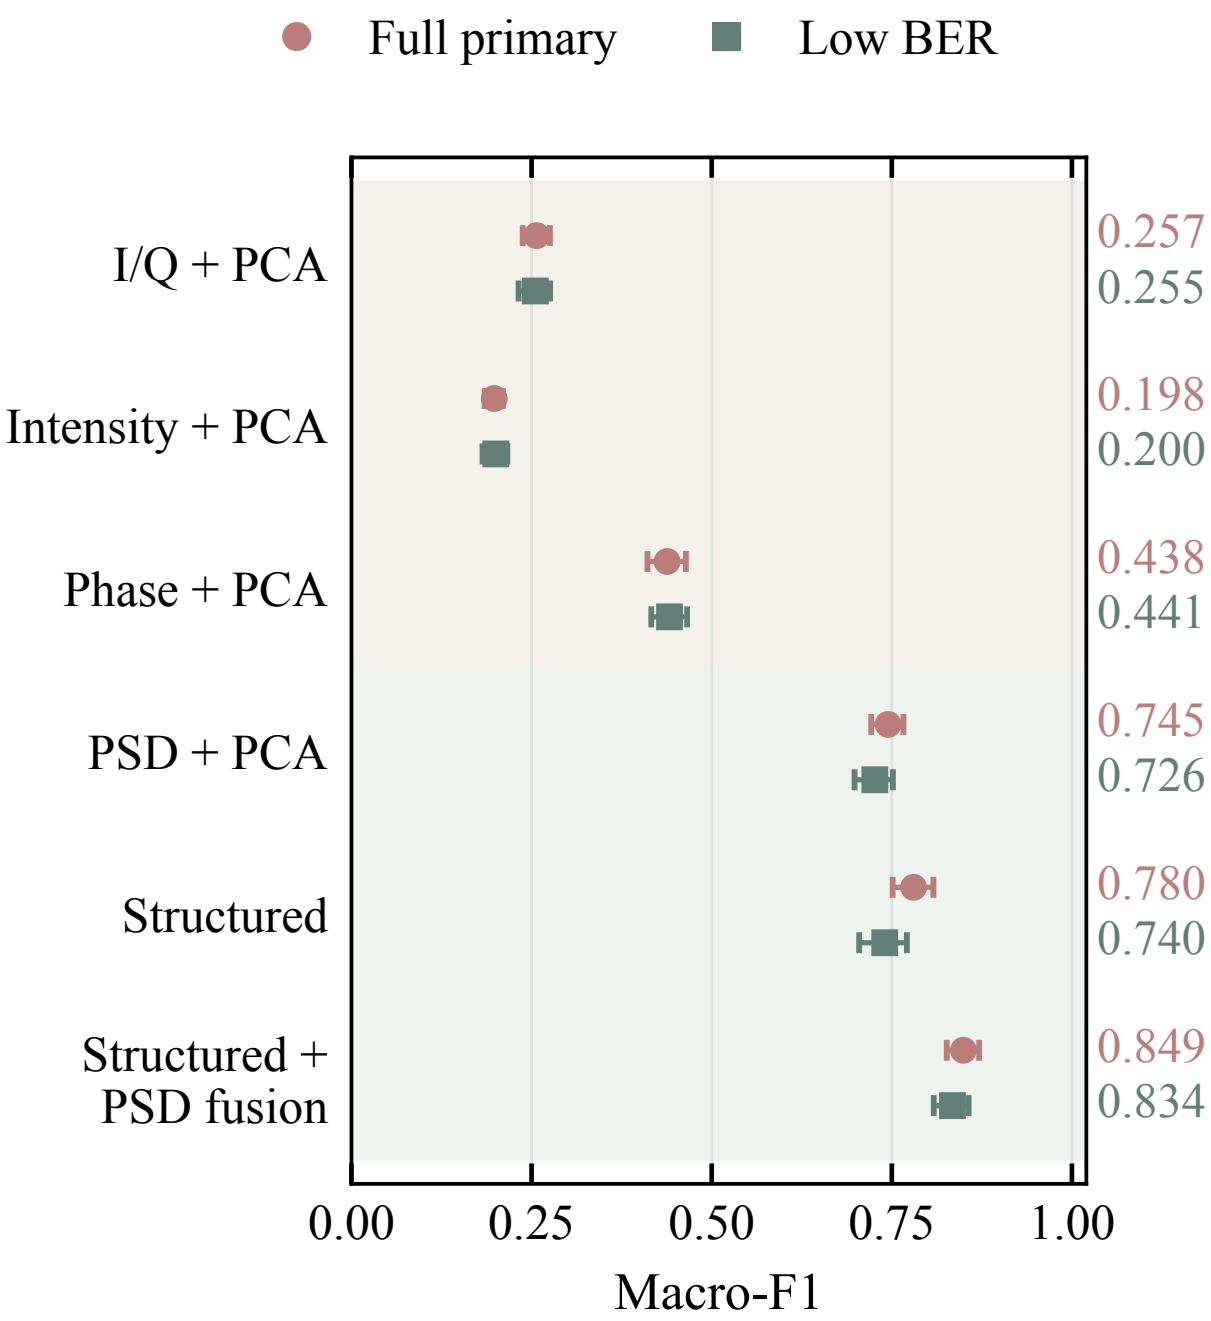

Results are grouped by the operating conditions and evaluation protocol indicated in the figure. Configuration identifiers link the figures to the accompanying data tables.

S6.4 | Held-out operating-condition values

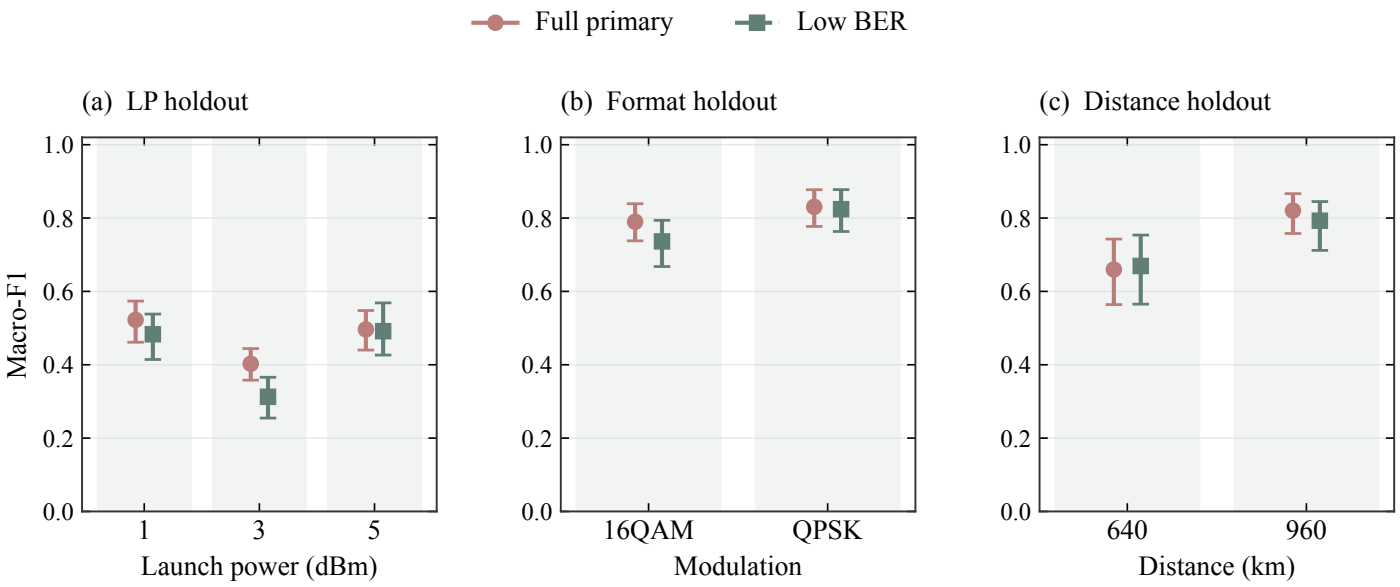

LightGBM transfer to held-out launch-power, modulation, and distance values. Training excludes all captures with the tested value. Full primary and low-BER cohorts are evaluated on directions containing all five classes in both training and test sets. Error bars are 95% configuration-bootstrap intervals.

S6.5 | Complete operating-condition holdout

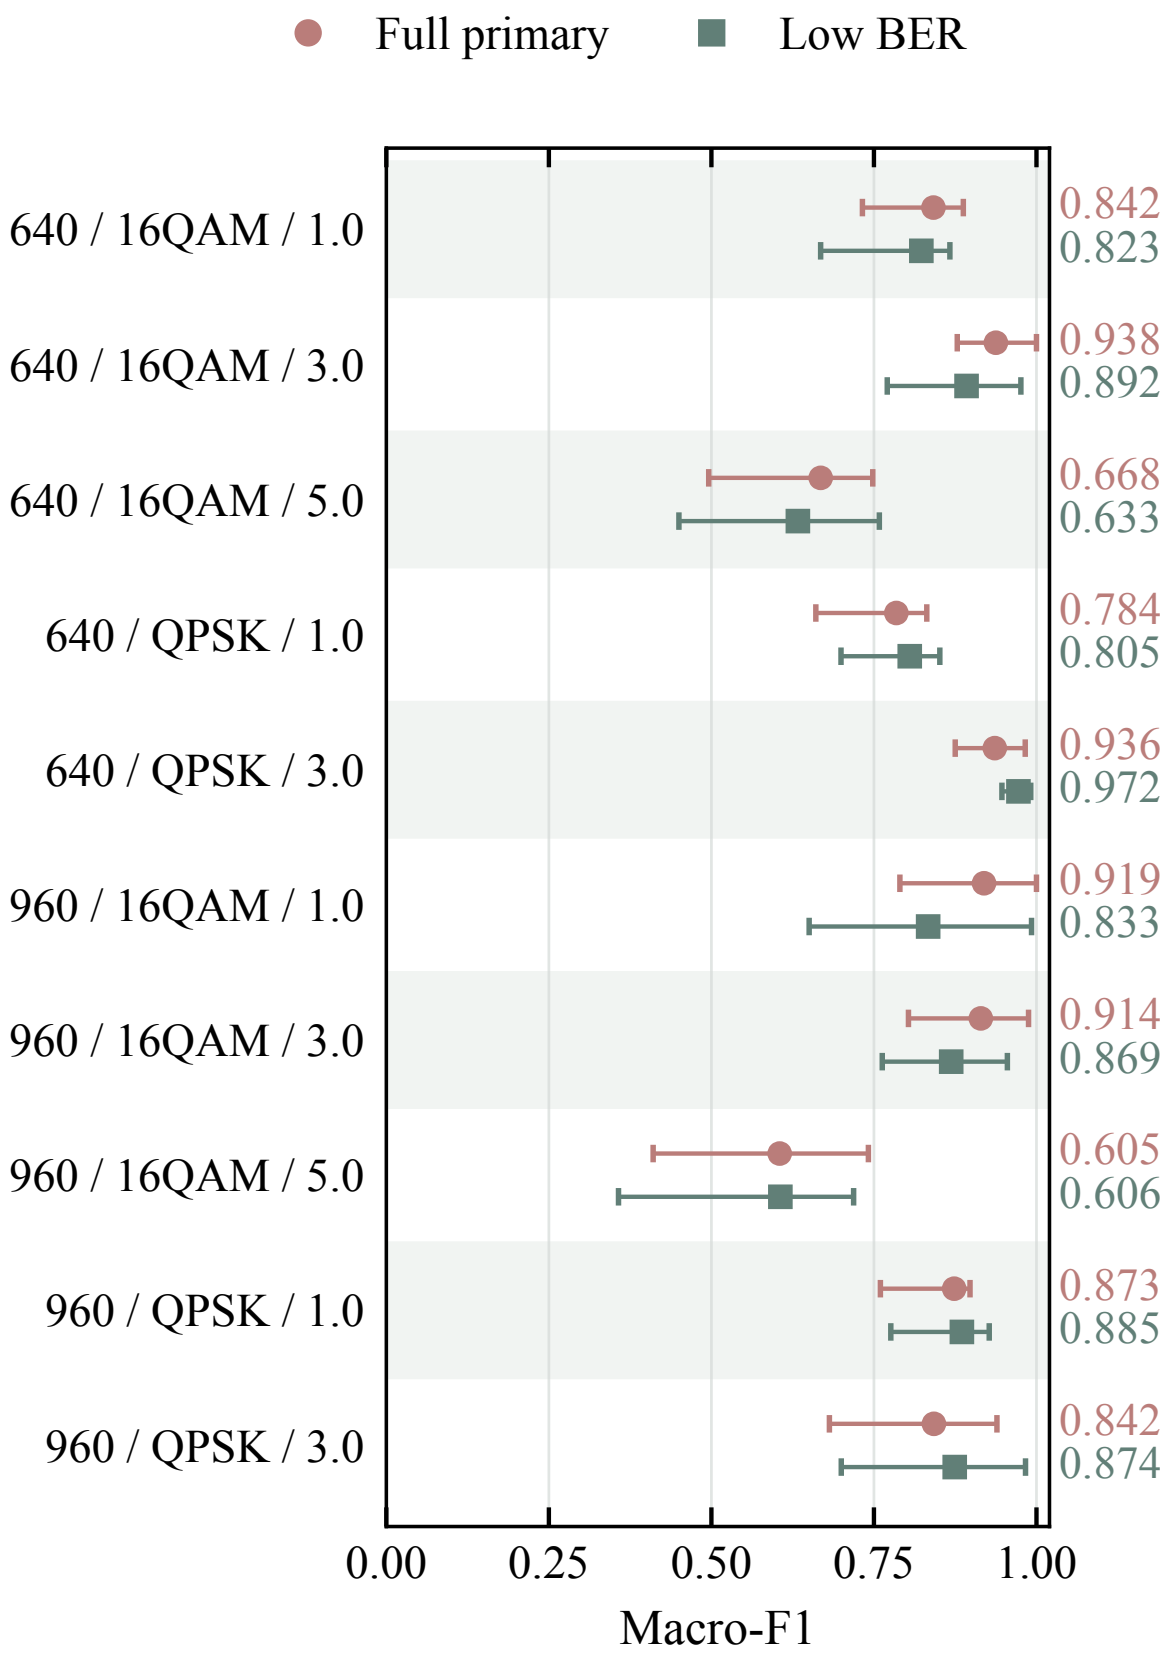

Five-class performance for held-out distance?modulation?launch-power combinations. All training captures from the tested combination are excluded. Full and low-BER results use their respective eligible cells; intervals resample test configurations.

S6.6 | Within-condition models | within condition

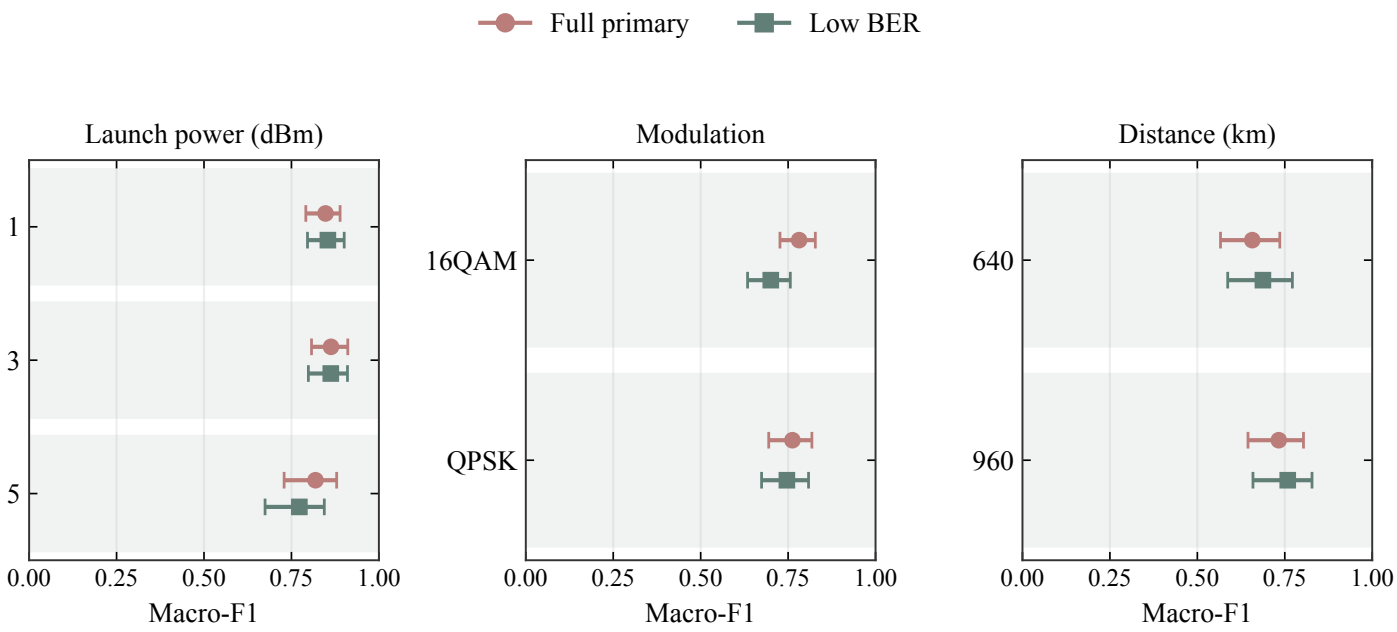

Within-condition modeling shares the named condition between training and test; this is not transfer to an unseen condition. Intervals resample saved configuration-group predictions.

Feature index | 32 retained descriptors

01 power_x_db

02 power_y_db

03 power_total_db

04 crest_i1

05 crest_q1

06 crest_i2

07 crest_q2

08 skew_i1

09 skew_q1

10 skew_i2

11 skew_q2

12 kurt_i1

13 kurt_q1

14 kurt_i2

15 kurt_q2

16 corr_i1_q1

17 corr_i2_q2

18 corr_i1_i2

19 corr_q1_q2

20 corr_amp_xy

21 amp_std_x

22 amp_std_y

23 amp_skew_x

24 amp_skew_y

25 amp_kurt_x

26 amp_kurt_y

27 psd_centroid_norm

28 psd_bw3_norm

29 psd_bw10_norm

30 psd_lr_diff_db

31 psd_flatness_db

32 psd_ripple_std_db

Configuration-indexed constellations

All 299 primary physical configurations are included.

For a configuration with accepted DSP outputs, the representative capture is selected nearest to the mean BER of those outputs. Its BER and the configuration mean are displayed separately.

295 configurations have a valid representative candidate. Four have no valid DSP output and retain a missing-image entry.

This appendix preserves every acquired setting; it does not imply balanced five-class support at every distance. No synthetic constellation coordinates are used.

Constellations | configurations 1-2

QPSK | 320 km | 1 dBm | attenuation 3dB

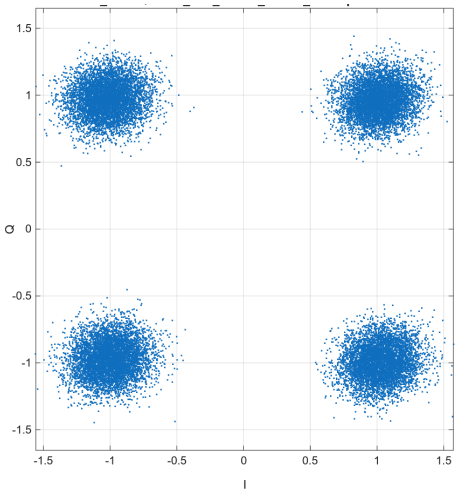

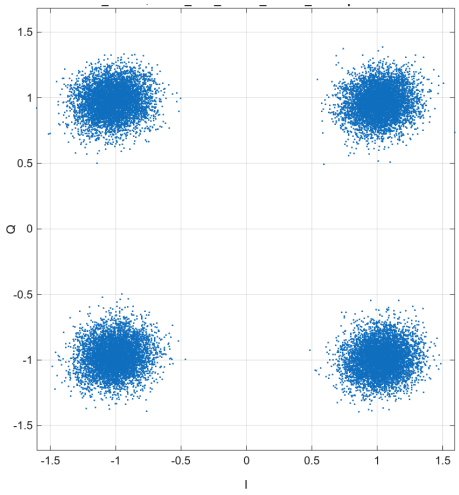

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_e5e6825c4bdc9d143aaa

QPSK | 320 km | 1 dBm | attenuation 5dB

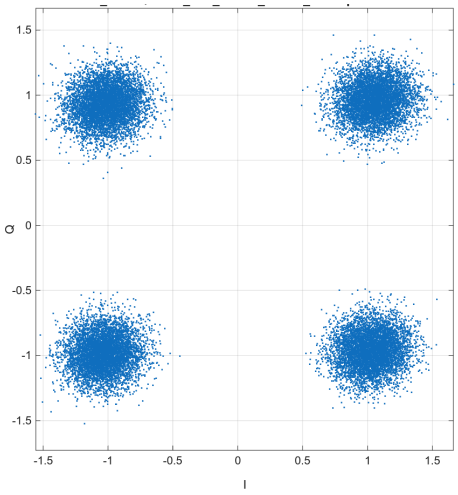

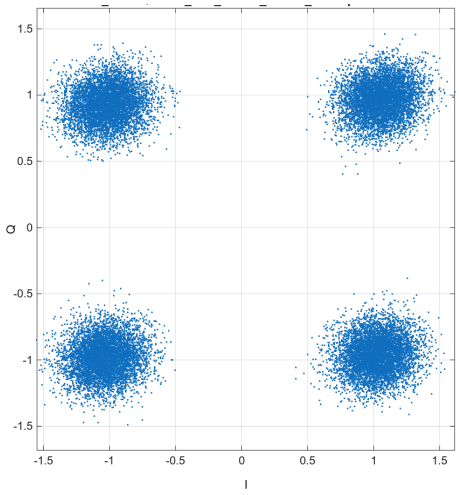

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_cf44ef1b59dbf3a1c56f

Constellations | configurations 3-4

QPSK | 320 km | 1 dBm | edfa 1dB

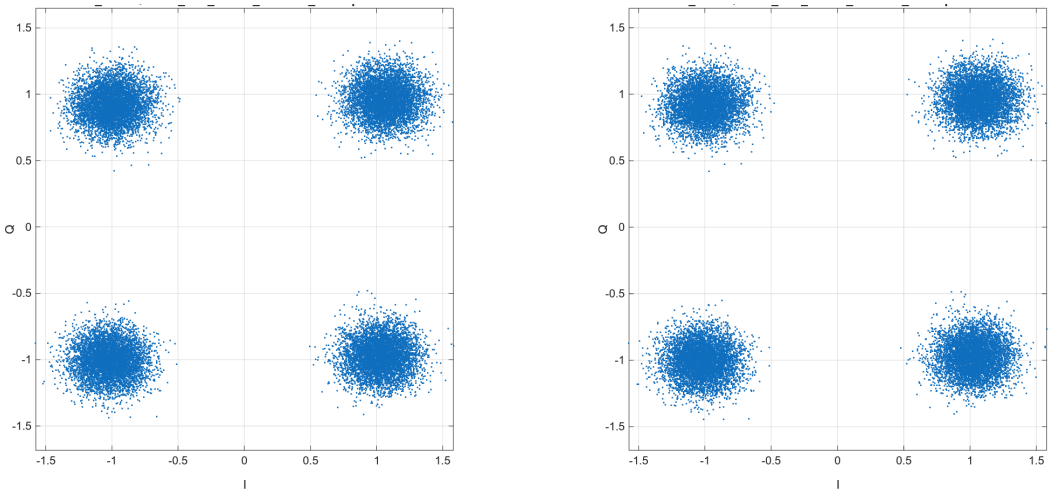

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 8 / 10 | ID: cfg_fba7f3574aca3d3c933c

QPSK | 320 km | 1 dBm | edfa 3dB

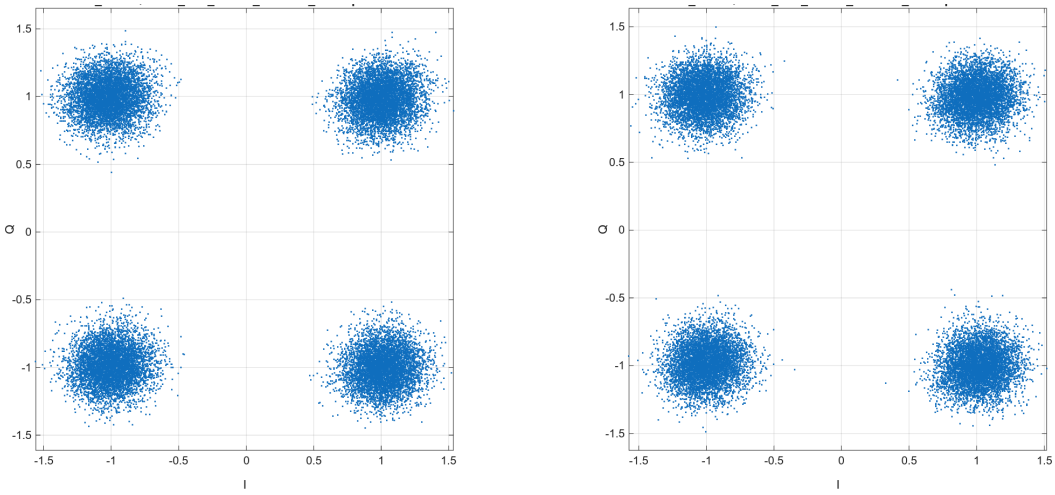

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 9 / 10 | ID: cfg_fb1a93734c0c6ea1396f

Constellations | configurations 5-6

QPSK | 320 km | 1 dBm | edfa 5dB

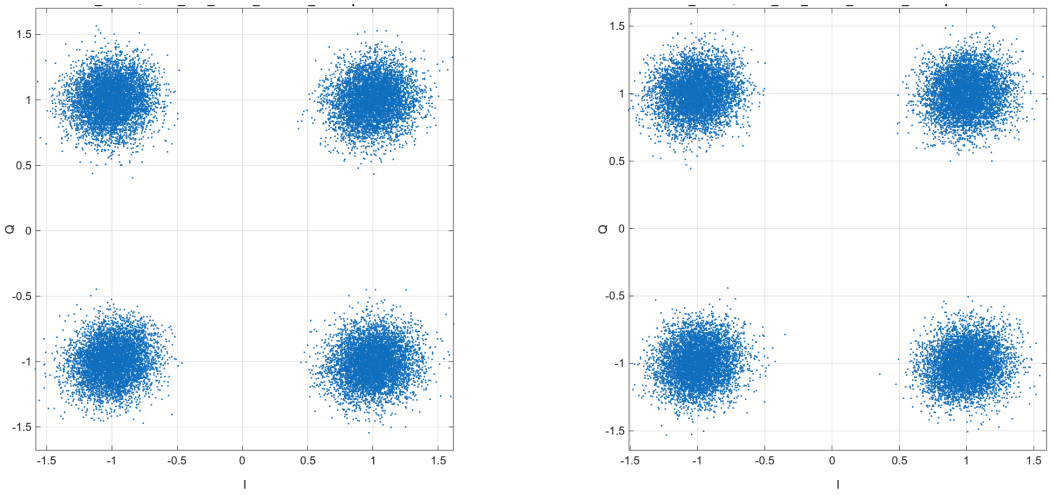

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_34d209940f3740254d95

QPSK | 320 km | 1 dBm | edfa 9dB

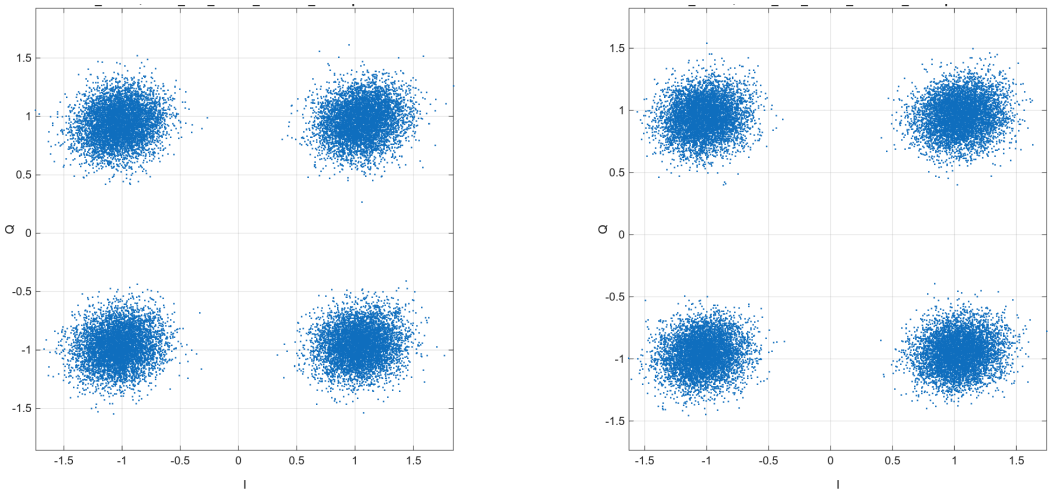

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_8b24aa822b258341bd40

Constellations | configurations 7-8

QPSK | 320 km | 1 dBm | wss offset 4GHz

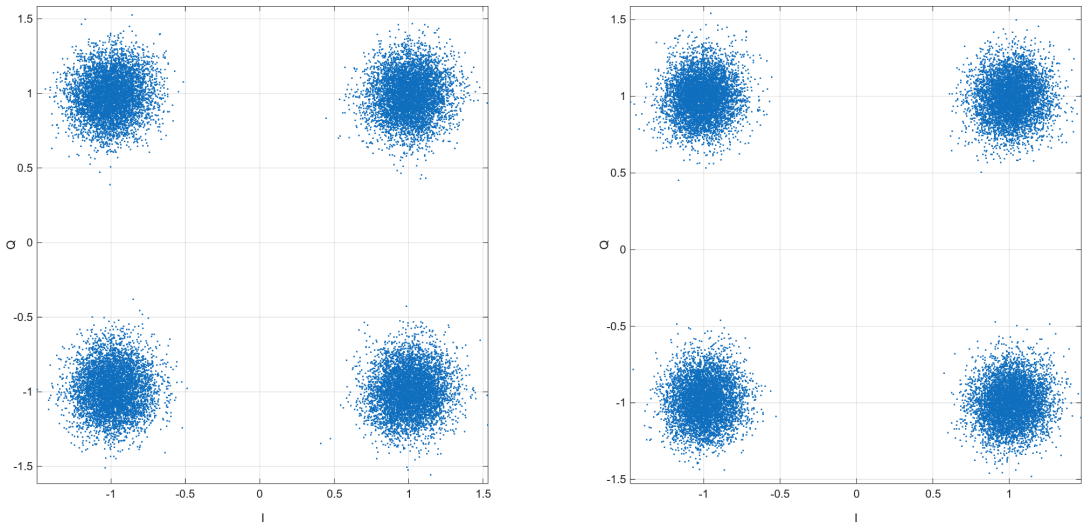

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 9 / 10 | ID: cfg_7e4ac56615aefa32231a

QPSK | 320 km | 1 dBm | wss offset 8GHz

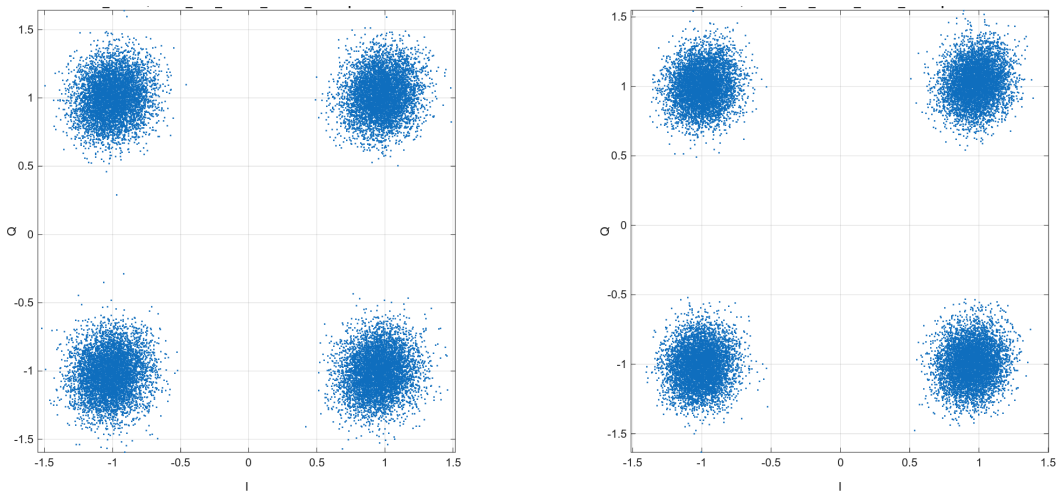

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 5 / 10 | ID: cfg_5d279eae9341c26321c5

Constellations | configurations 9-10

QPSK | 320 km | 1 dBm | wss offset 12GHz

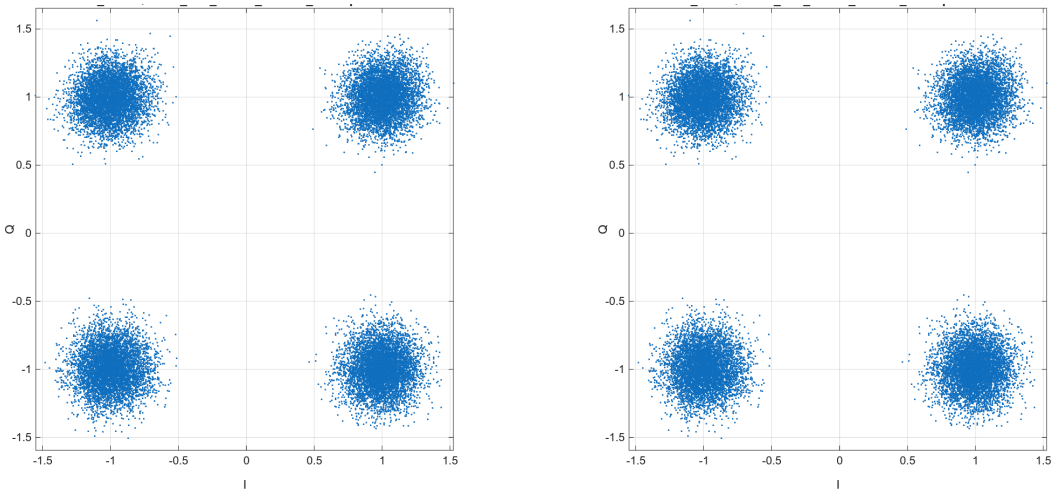

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 7 / 10 | ID: cfg_6ffcf5f5e19b504956fc

QPSK | 320 km | 1 dBm | wss offset 16GHz

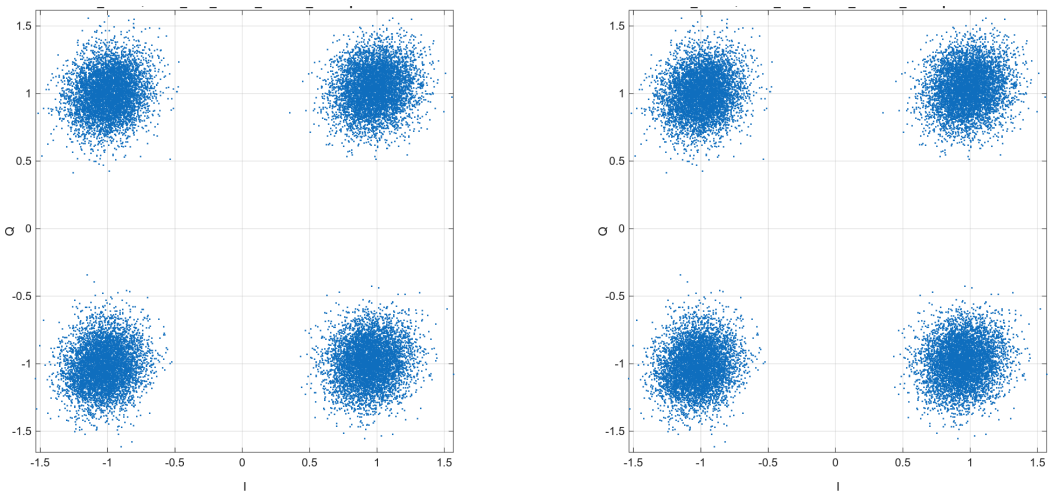

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 4 / 10 | ID: cfg_3da89292bb5e10e3229a

Constellations | configurations 11-12

QPSK | 320 km | 1 dBm | wss offset 20GHz

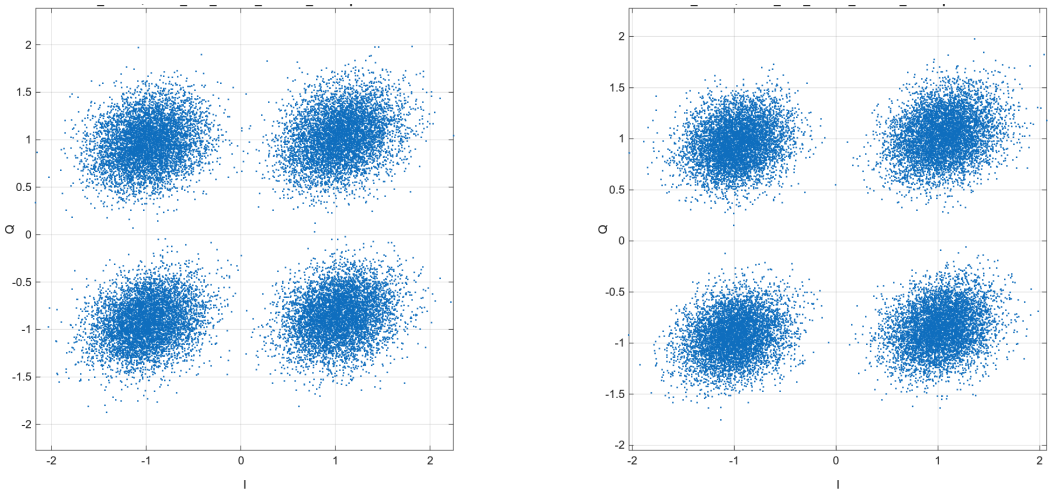

Representative BER: 0.00014595 | configuration mean: 0.00013128
Accepted / total captures: 8 / 10 | ID: cfg_3a01e2eb6c11664365a5

QPSK | 320 km | 1 dBm | wss offset 24GHz

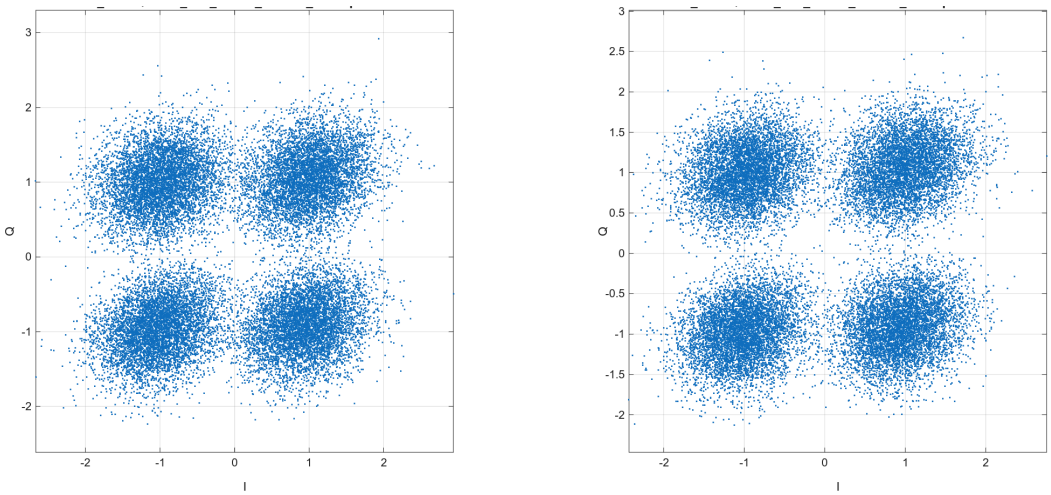

Representative BER: 0.005008 | configuration mean: 0.0049903
Accepted / total captures: 10 / 10 | ID: cfg_ba86ac3cdade479a8041

Constellations | configurations 13-14

QPSK | 320 km | 1 dBm | Normal

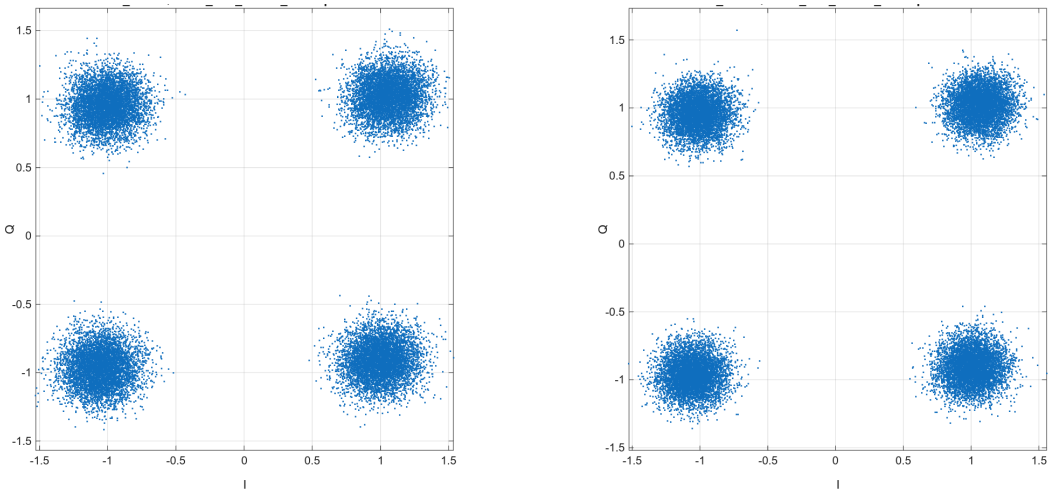

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 16 / 16 | ID: cfg_8708cc57ffaf66ca5cb0

QPSK | 320 km | 3 dBm | attenuation 3dB

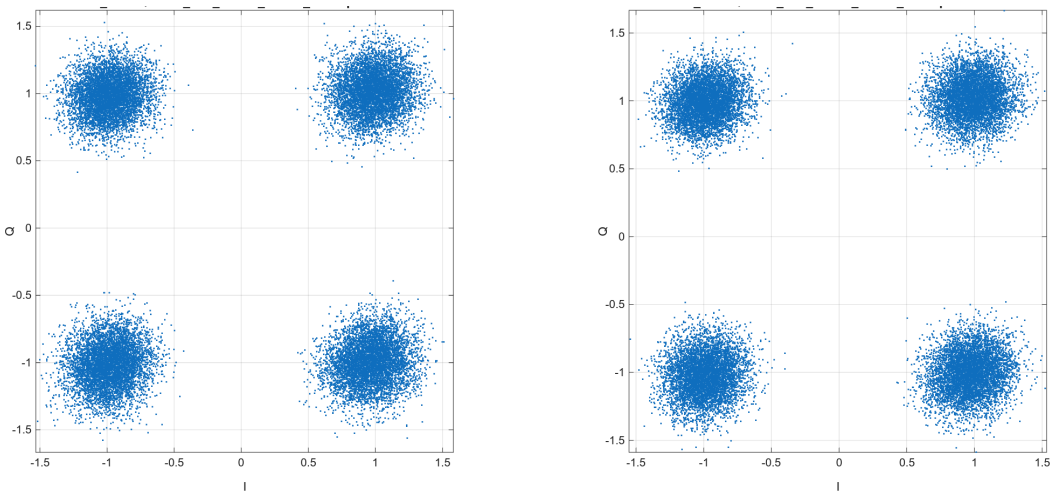

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_dd68156144e93fec4230

Constellations | configurations 15-16

QPSK | 320 km | 3 dBm | attenuation 5dB

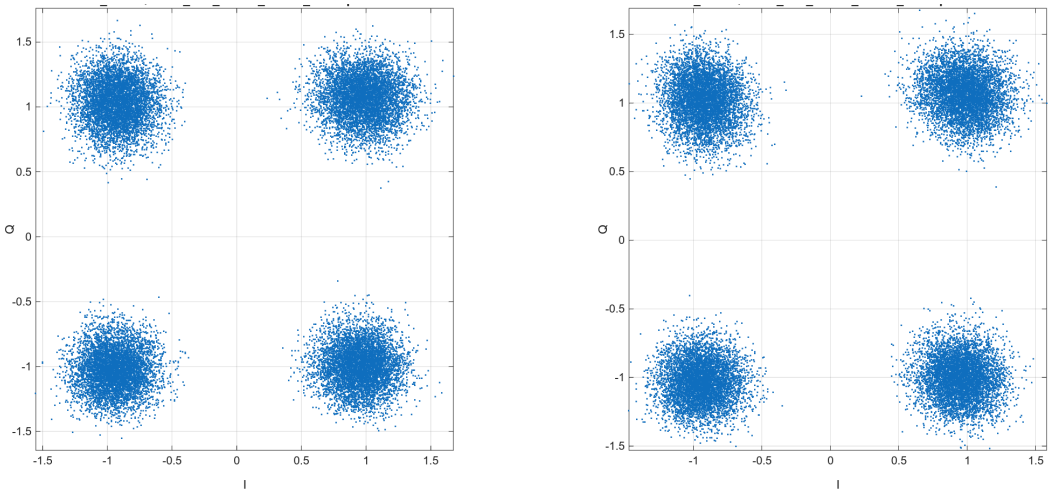

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_fb2c18db0317fe7a7abf

QPSK | 320 km | 3 dBm | edfa 1dB

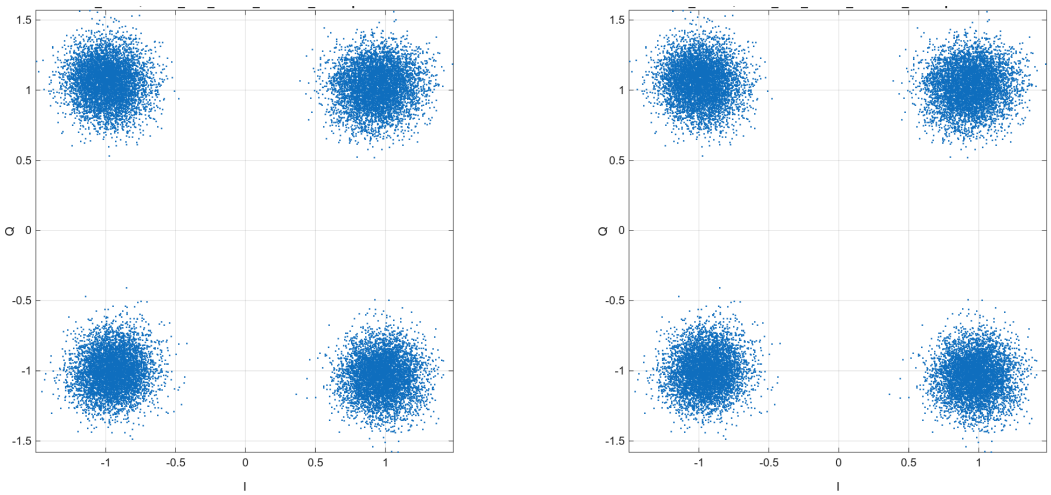

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_dea14e056de31c12754a

Constellations | configurations 17-18

QPSK | 320 km | 3 dBm | edfa 3dB

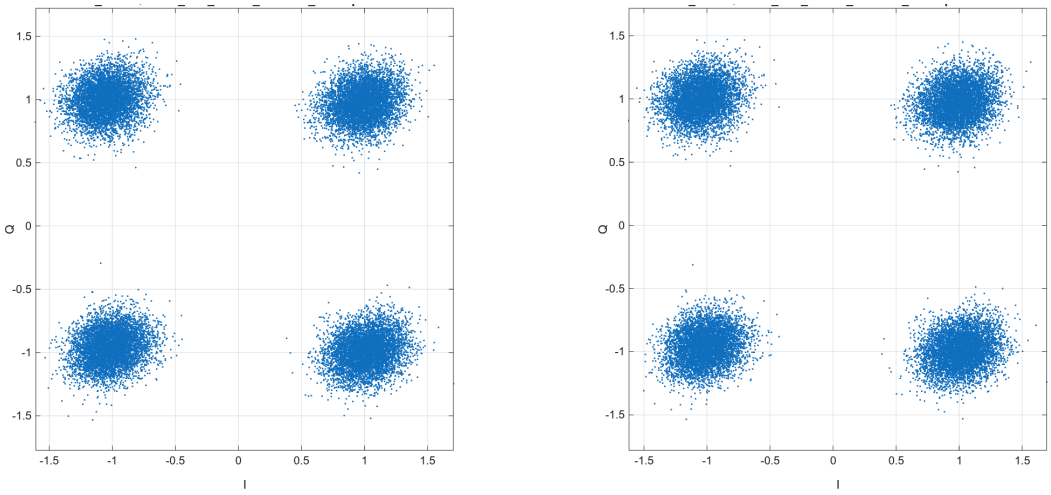

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 9 / 10 | ID: cfg_0487e85b35ec800ec64a

QPSK | 320 km | 3 dBm | edfa 5dB

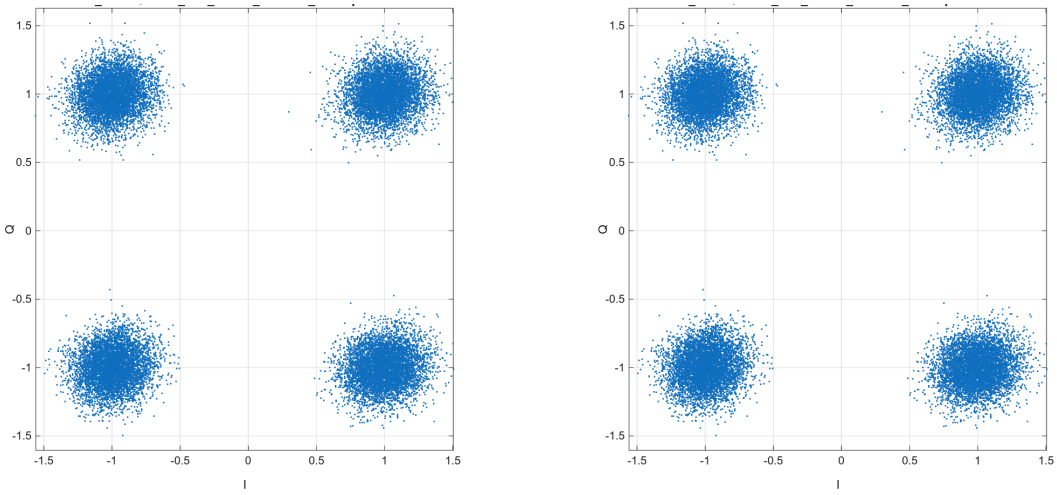

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_d0e1867d0de709bd99d7

Constellations | configurations 19-20

QPSK | 320 km | 3 dBm | edfa 9dB

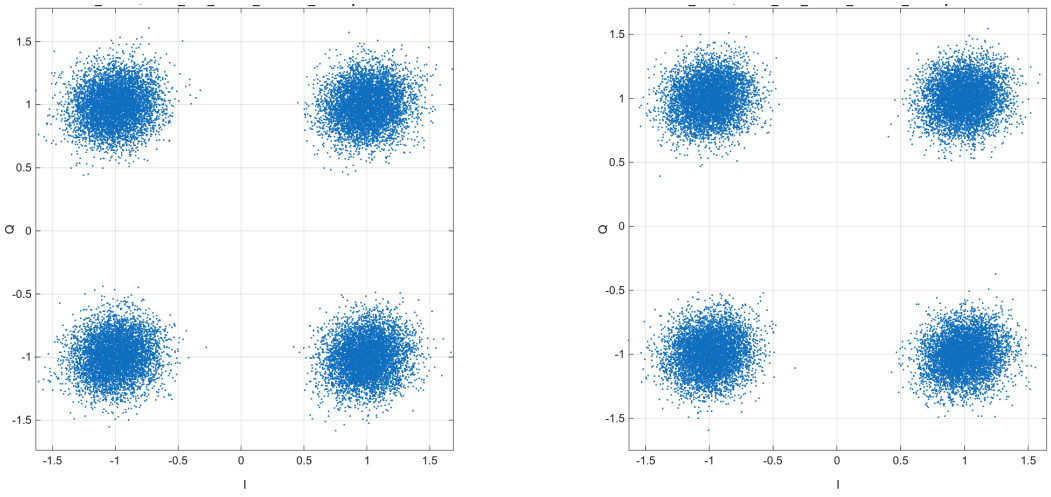

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_6c8979ee149526cb4693

QPSK | 320 km | 3 dBm | Normal

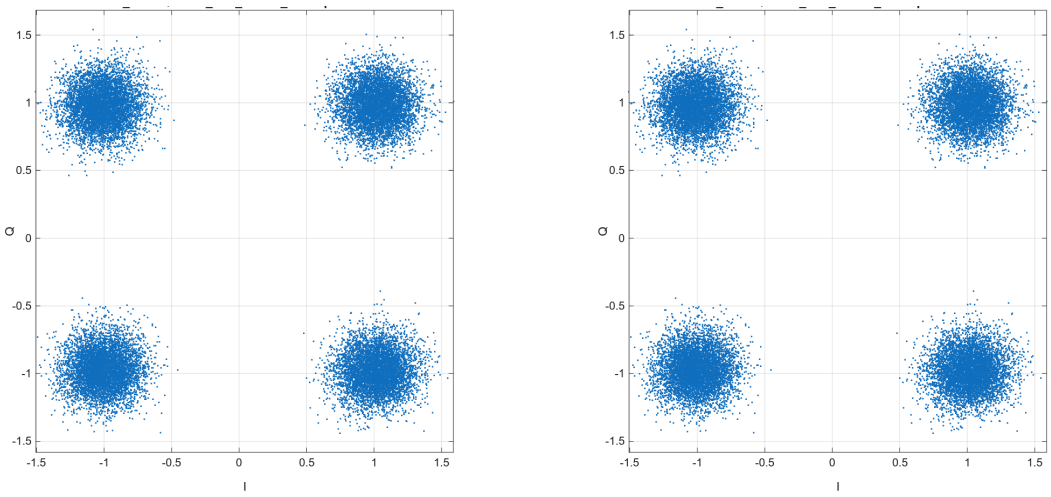

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 16 | ID: cfg_436e246c334f2857553d

Constellations | configurations 21-22

QPSK | 320 km | 5 dBm | Normal

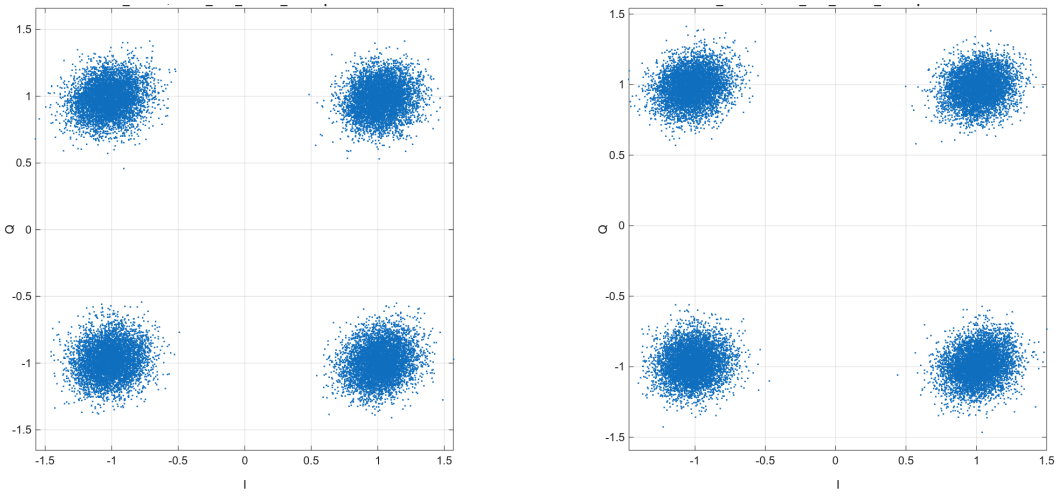

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 16 / 16 | ID: cfg_576ca31361fada4a05fc

QPSK | 640 km | 1 dBm | attenuation 3dB

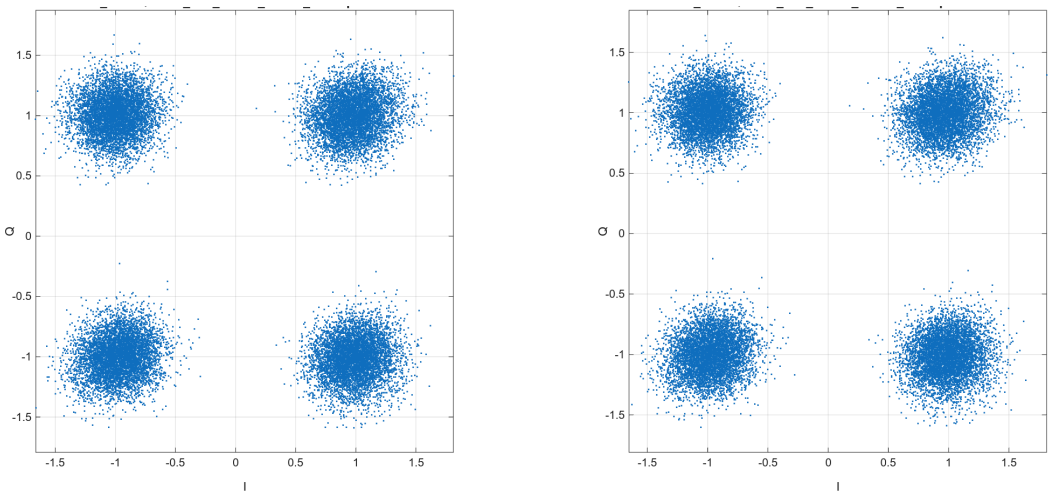

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 7 / 10 | ID: cfg_2fac363e35a381f4b058

Constellations | configurations 23-24

QPSK | 640 km | 1 dBm | attenuation 5dB

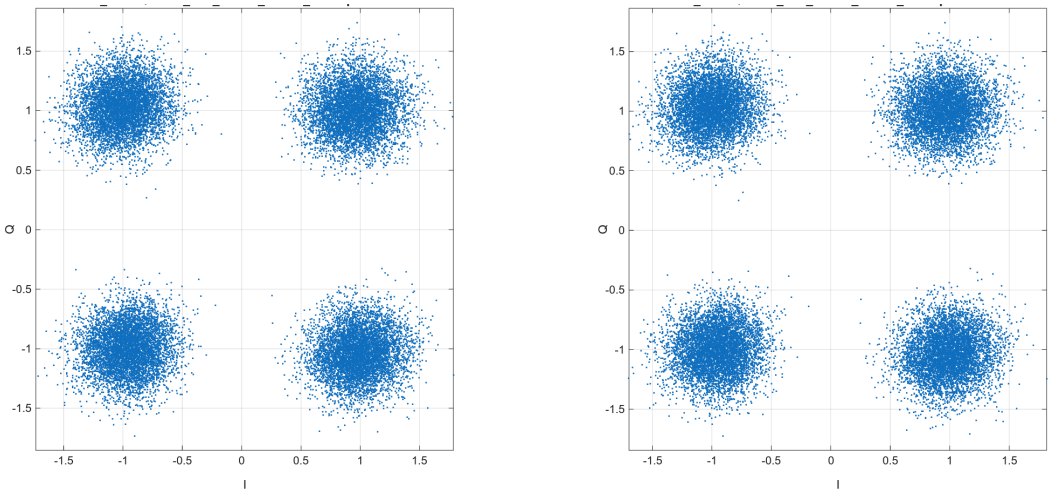

Representative BER: 0 | configuration mean: 3.5772e-07
Accepted / total captures: 8 / 10 | ID: cfg_5efe7f61db805baee82f

QPSK | 640 km | 1 dBm | edfa 1dB

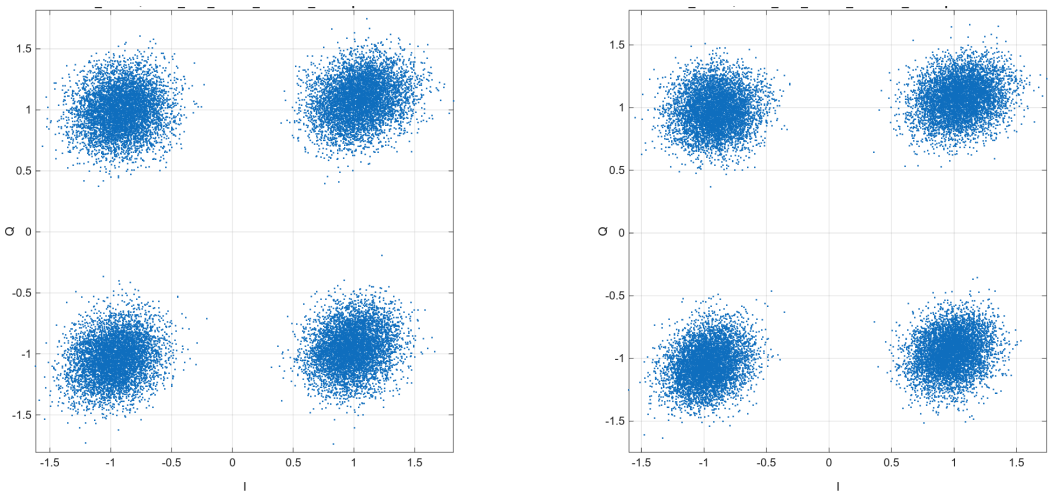

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 8 / 10 | ID: cfg_01ad76156bc6c70a417a

Constellations | configurations 25-26

QPSK | 640 km | 1 dBm | edfa 3dB

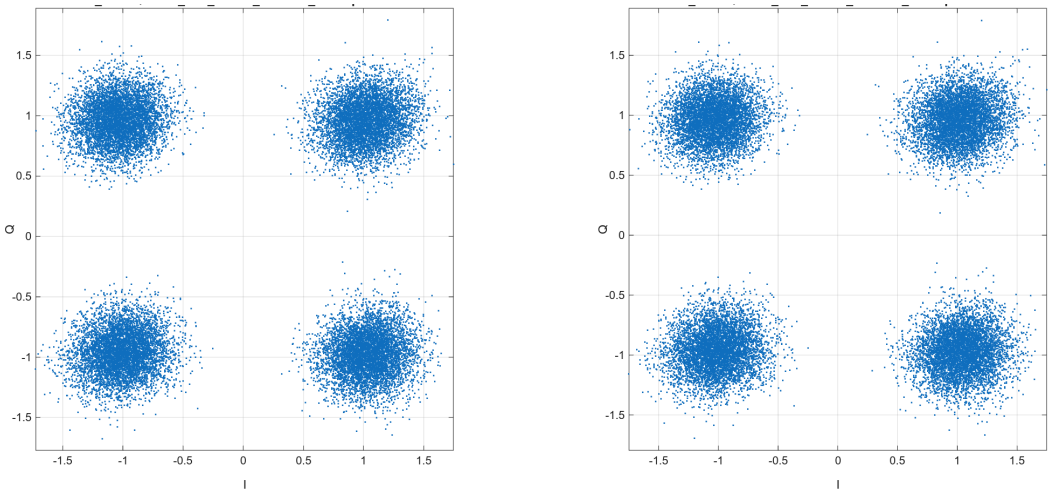

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 9 / 10 | ID: cfg_eee1792d045865de2669

QPSK | 640 km | 1 dBm | edfa 5dB

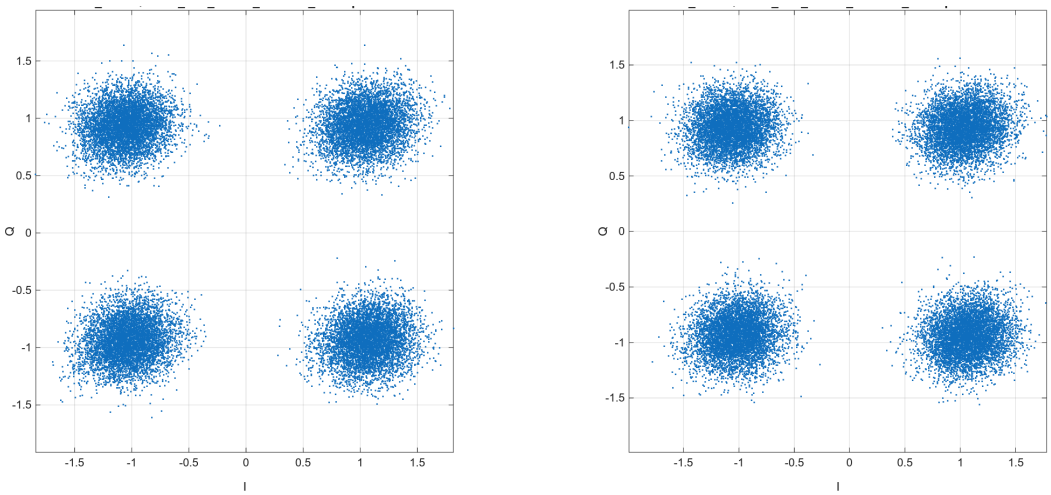

Representative BER: 0 | configuration mean: 9.5391e-07
Accepted / total captures: 6 / 10 | ID: cfg_66a476d28d3642ac0ee9

Constellations | configurations 27-28

QPSK | 640 km | 1 dBm | edfa 9dB

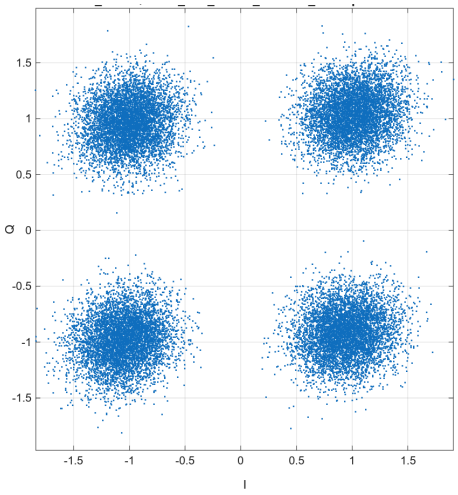

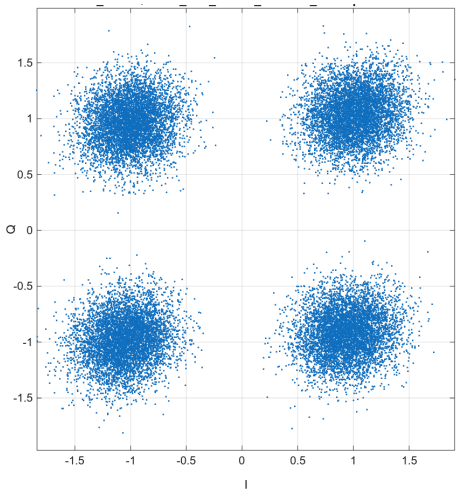

Representative BER: 5.7234e-06 | configuration mean: 2.8617e-06
Accepted / total captures: 4 / 10 | ID: cfg_14120943c93470e8af10

QPSK | 640 km | 1 dBm | wss offset 4GHz

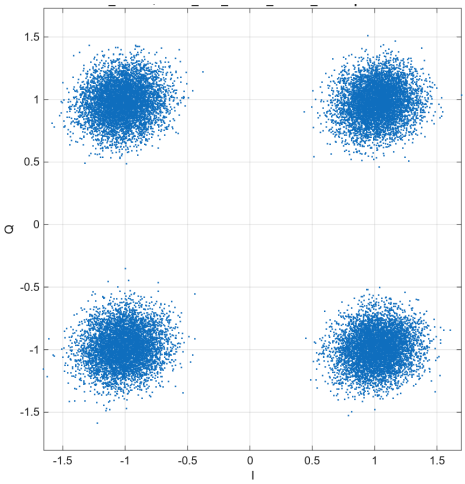

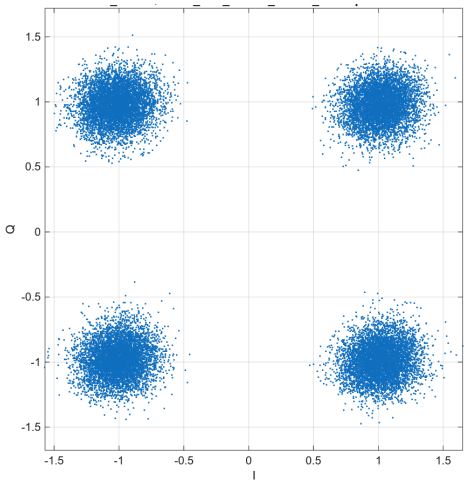

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 7 / 10 | ID: cfg_01485d700427fe316b38

Constellations | configurations 29-30

QPSK | 640 km | 1 dBm | wss offset 8GHz

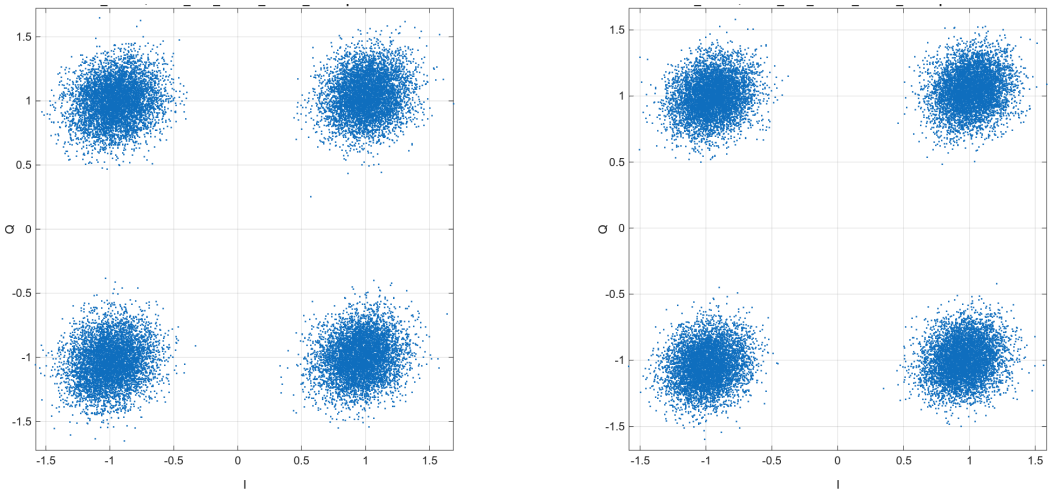

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 7 / 10 | ID: cfg_97872f100989ee36b44d

QPSK | 640 km | 1 dBm | wss offset 12GHz

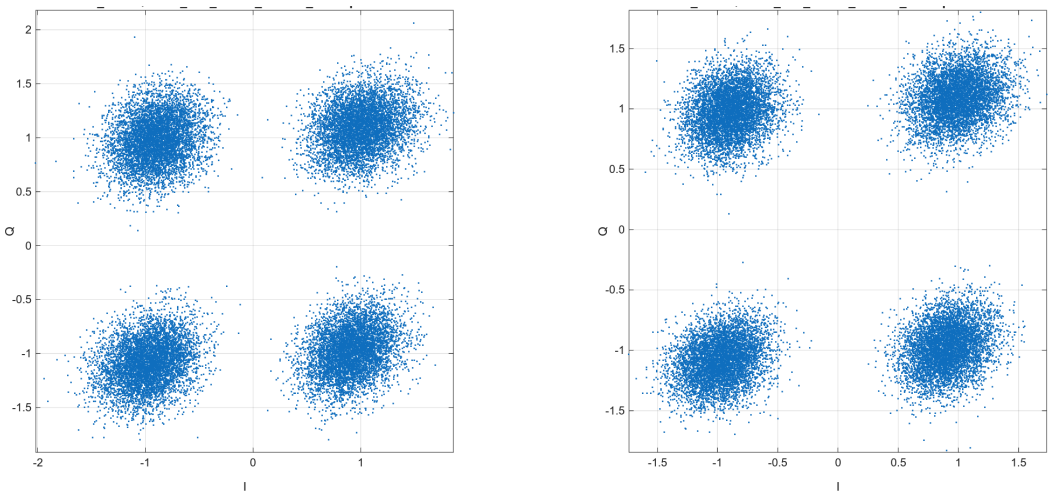

Representative BER: 0 | configuration mean: 5.7234e-07
Accepted / total captures: 5 / 10 | ID: cfg_60834890e0256e10c80c

Constellations | configurations 31-32

QPSK | 640 km | 1 dBm | wss offset 16GHz

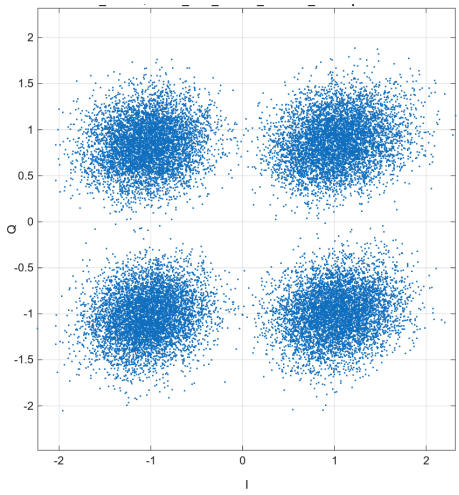

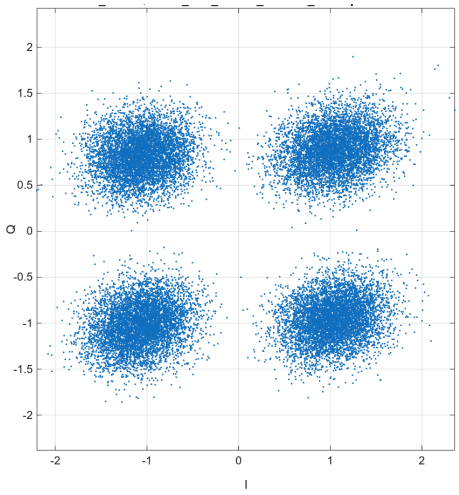

Representative BER: 0.00044357 | configuration mean: 0.0003331
Accepted / total captures: 5 / 10 | ID: cfg_7e56fc0a82fee8c985bc

QPSK | 640 km | 1 dBm | wss offset 20GHz

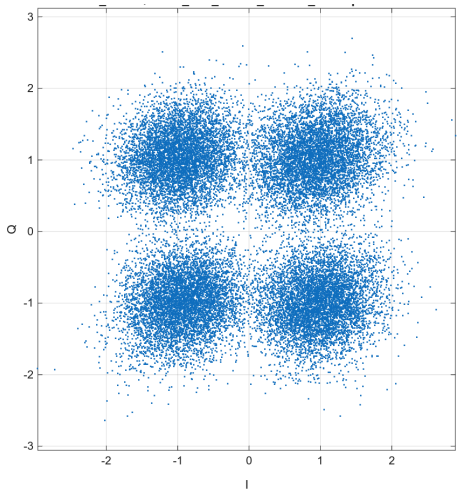

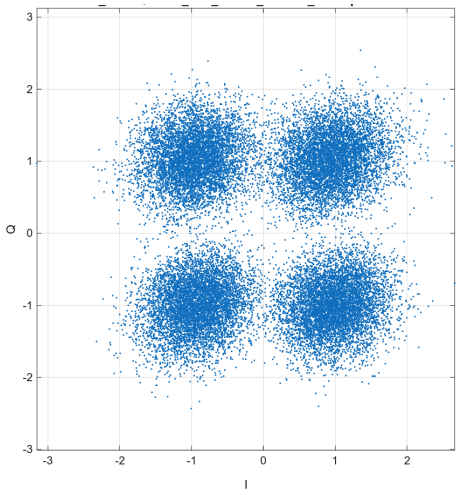

Representative BER: 0.0056261 | configuration mean: 0.0056894
Accepted / total captures: 10 / 10 | ID: cfg_e00df57673f3dd650907

Constellations | configurations 33-34

QPSK | 640 km | 1 dBm | wss offset 24GHz

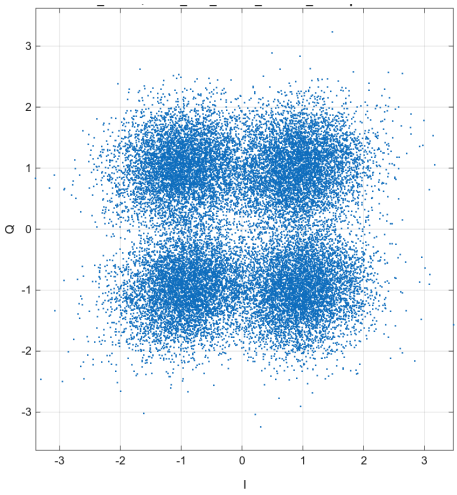

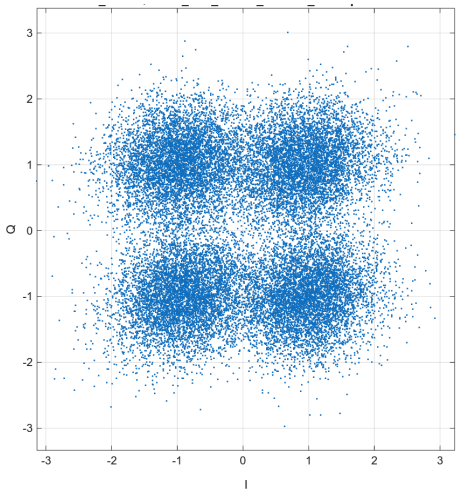

Representative BER: 0.02247 | configuration mean: 0.022464
Accepted / total captures: 10 / 10 | ID: cfg_53c3ec004bcefe200866

QPSK | 640 km | 1 dBm | wss bandwidth 55GHz

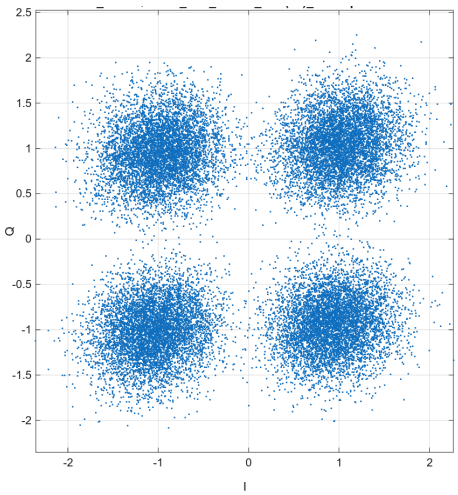

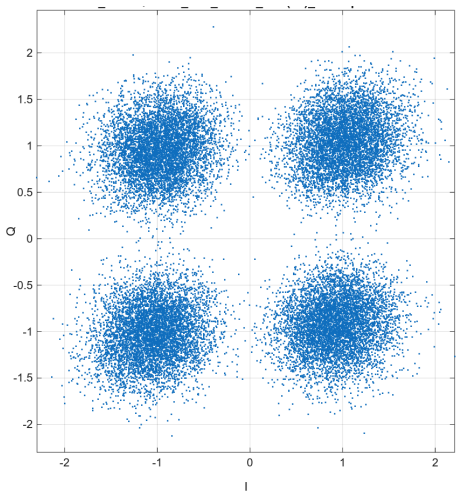

Representative BER: 0.00073546 | configuration mean: 0.00074906
Accepted / total captures: 8 / 10 | ID: cfg_c738a1b300e7b85ca5fb

Constellations | configurations 35-36

QPSK | 640 km | 1 dBm | wss bandwidth 60GHz

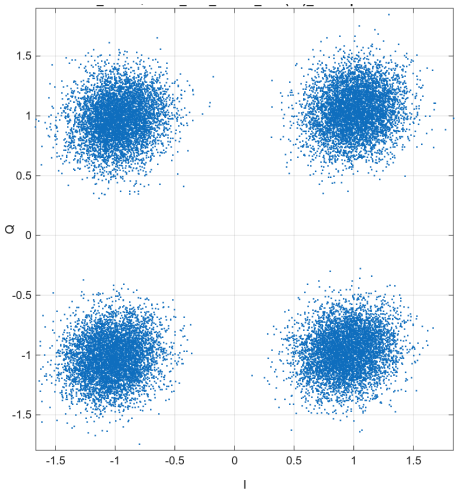

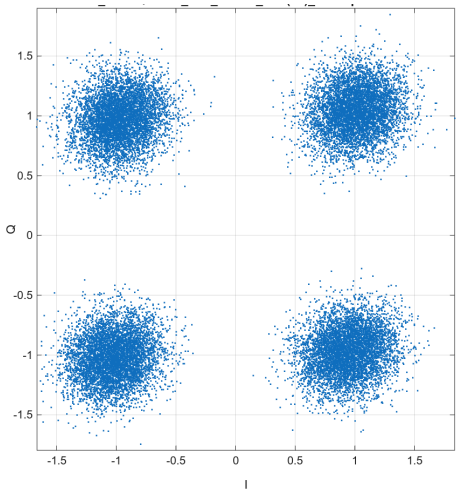

Representative BER: 0 | configuration mean: 2.2894e-06
Accepted / total captures: 5 / 10 | ID: cfg_0645161dfbee24bbf9a3

QPSK | 640 km | 1 dBm | wss bandwidth 65GHz

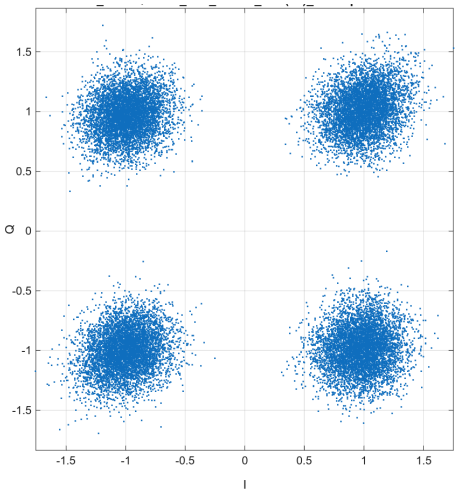

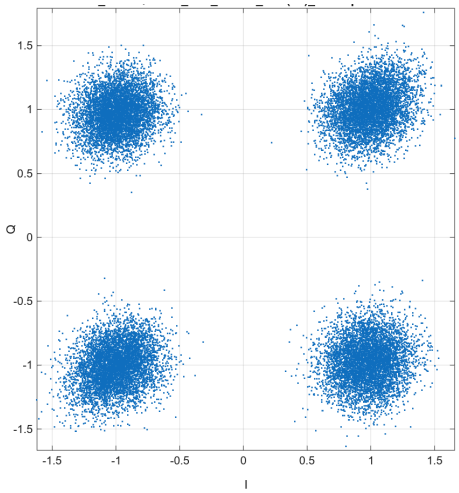

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_10ac22d925db8e2ceabe

Constellations | configurations 37-38

QPSK | 640 km | 1 dBm | wss bandwidth 70GHz

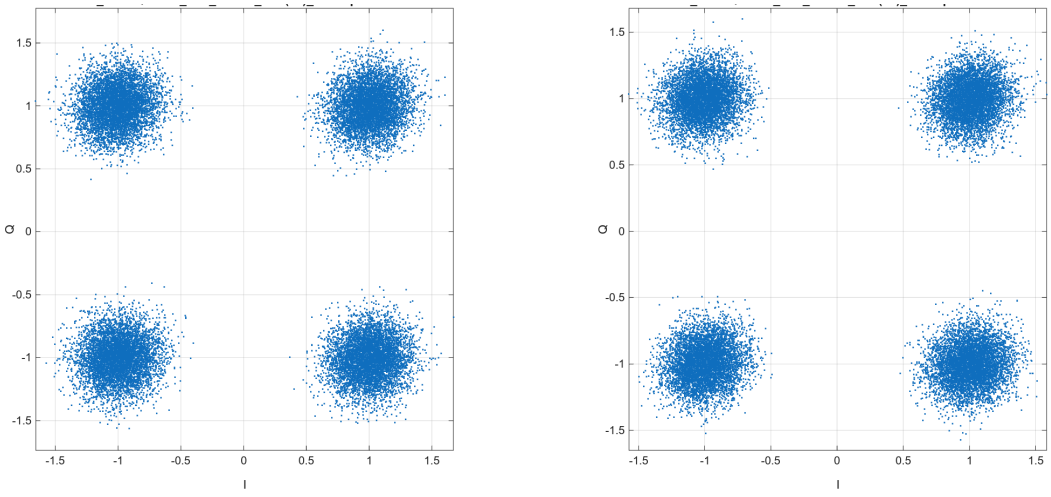

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_3ae843723985d6b58972

QPSK | 640 km | 1 dBm | Normal (75 GHz)

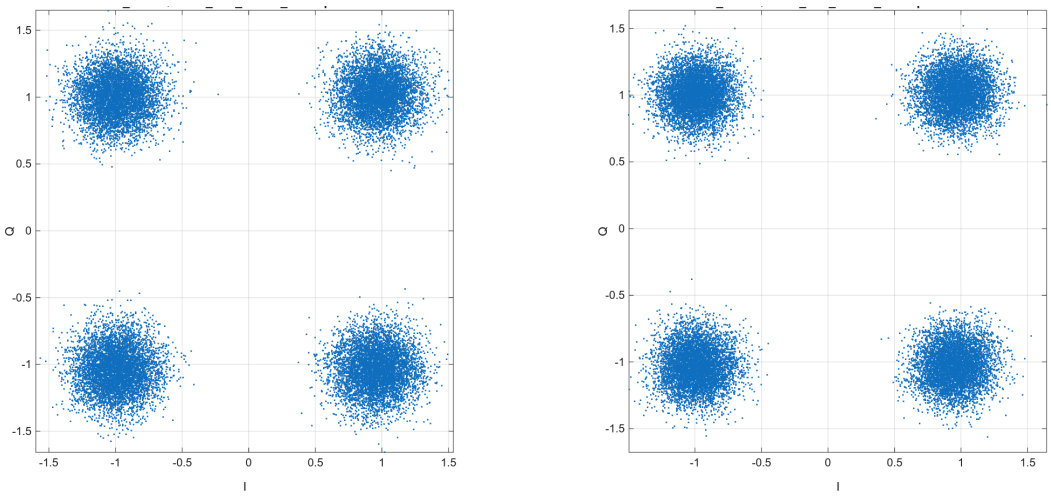

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 19 / 26 | ID: cfg_37419ce3d73de966fc22

Constellations | configurations 39-40

QPSK | 640 km | 3 dBm | attenuation 3dB

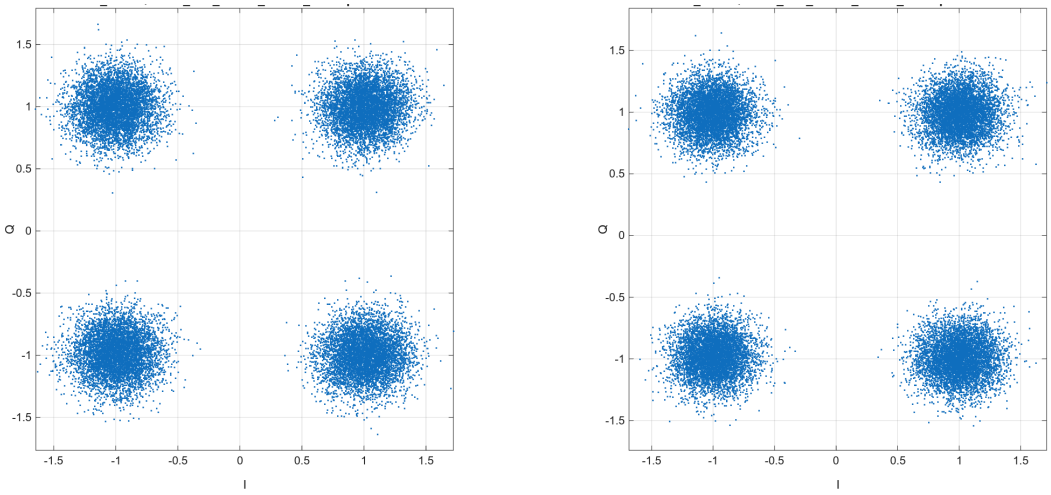

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 5 / 10 | ID: cfg_5537989de02a1835635a

QPSK | 640 km | 3 dBm | attenuation 5dB

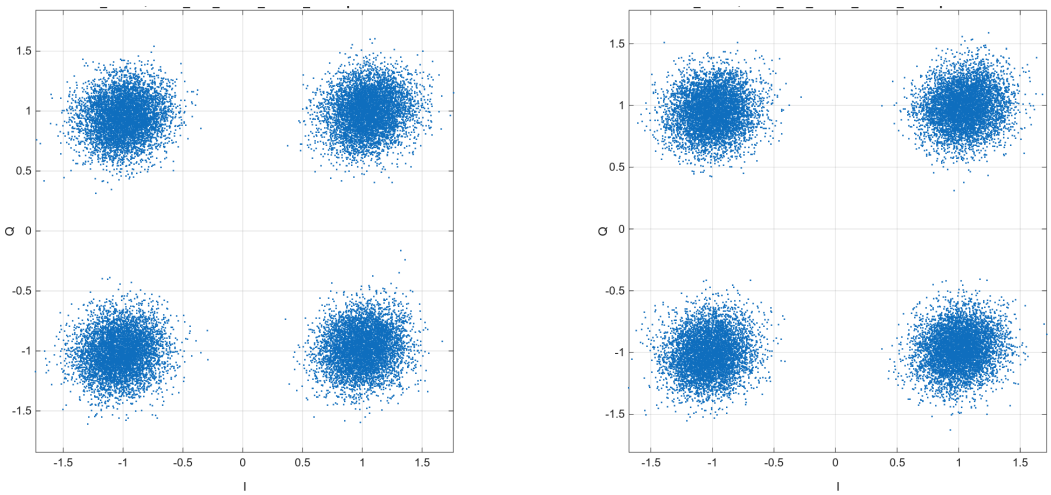

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 9 / 10 | ID: cfg_fb1679ddc1bd2730c45f

Constellations | configurations 41-42

QPSK | 640 km | 3 dBm | edfa 1dB

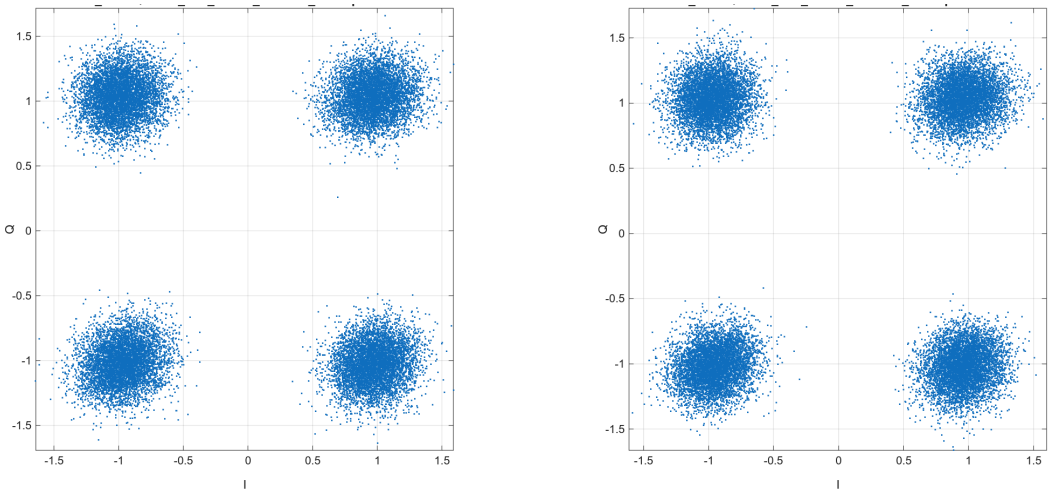

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 10 / 10 | ID: cfg_5231be228c94afff5483

QPSK | 640 km | 3 dBm | edfa 3dB

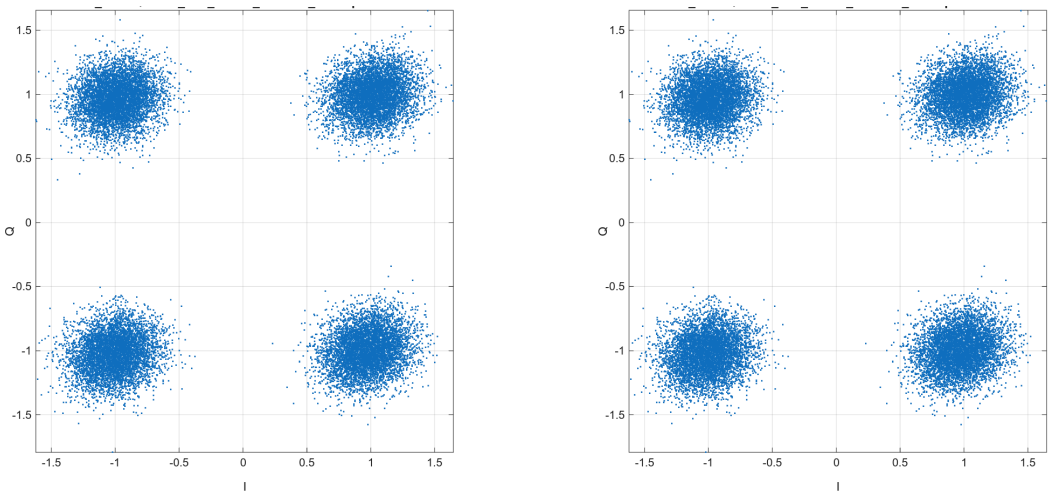

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 3 / 10 | ID: cfg_3421ec243152fed1c057

Constellations | configurations 43-44

QPSK | 640 km | 3 dBm | edfa 5dB

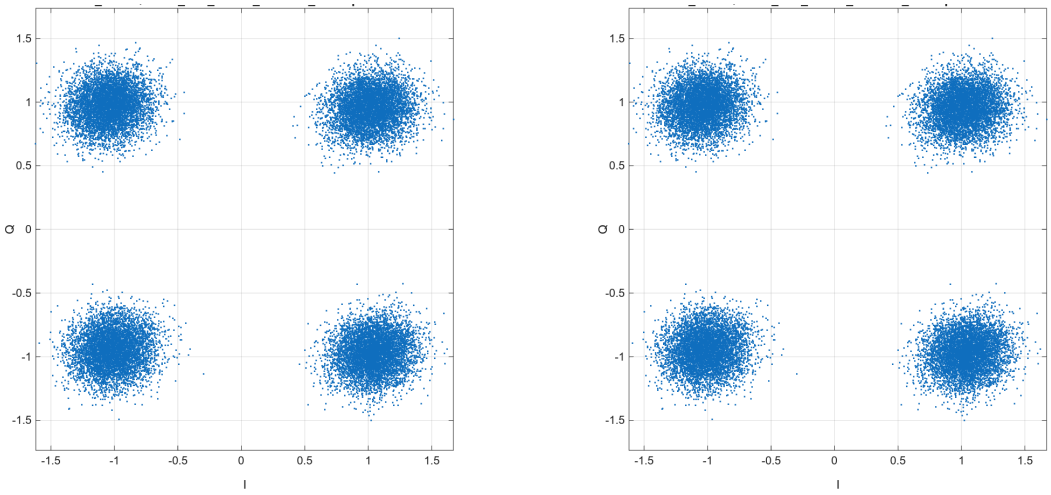

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 3 / 10 | ID: cfg_27391ff21495d9506611

QPSK | 640 km | 3 dBm | edfa 9dB

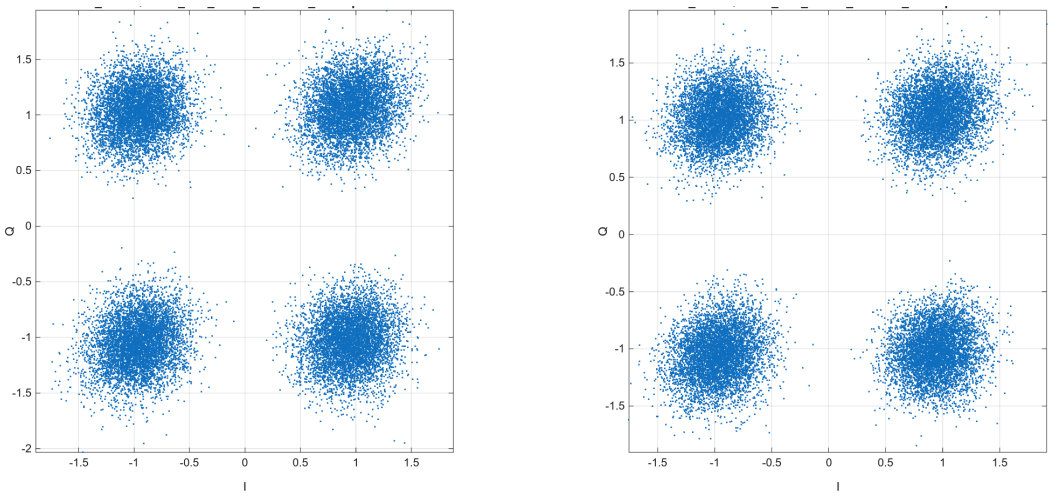

Representative BER: 2.8617e-06 | configuration mean: 1.9078e-06
Accepted / total captures: 9 / 10 | ID: cfg_d4676739ce5023450f1d

Constellations | configurations 45-46

QPSK | 640 km | 3 dBm | wss offset 4GHz

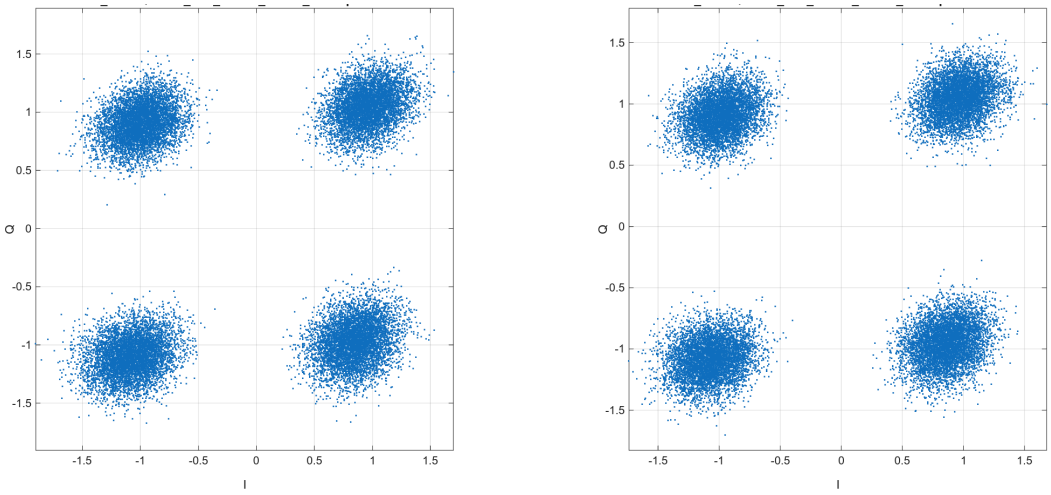

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 3 / 10 | ID: cfg_4c406e14abd431ea06f4

QPSK | 640 km | 3 dBm | wss offset 8GHz

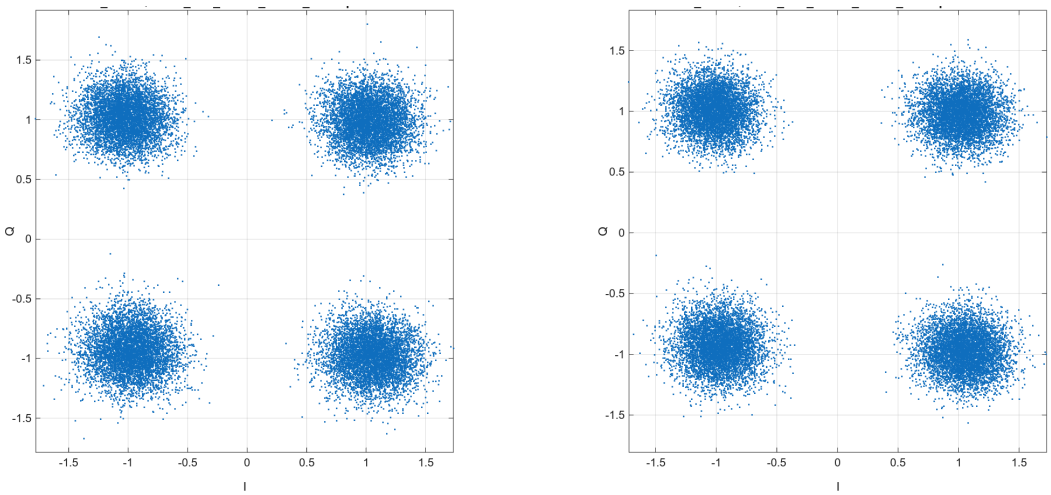

Representative BER: 0 | configuration mean: 7.1543e-07
Accepted / total captures: 4 / 10 | ID: cfg_0886e4ddde31a9a76928

Constellations | configurations 47-48

QPSK | 640 km | 3 dBm | wss offset 12GHz

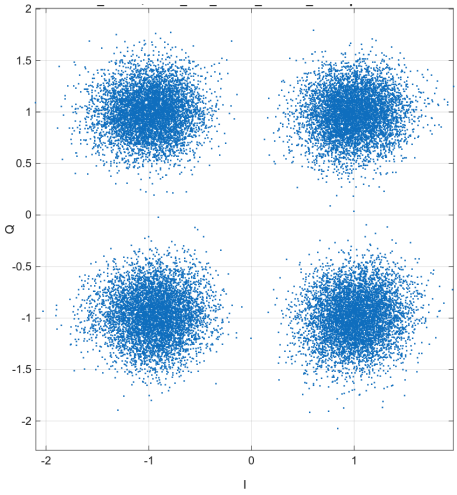

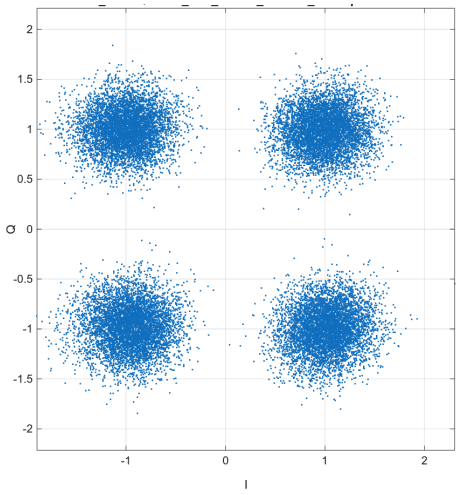

Representative BER: 8.5852e-06 | configuration mean: 5.7234e-06
Accepted / total captures: 5 / 10 | ID: cfg_496aa88c3f3dfb137048

QPSK | 640 km | 3 dBm | wss offset 16GHz

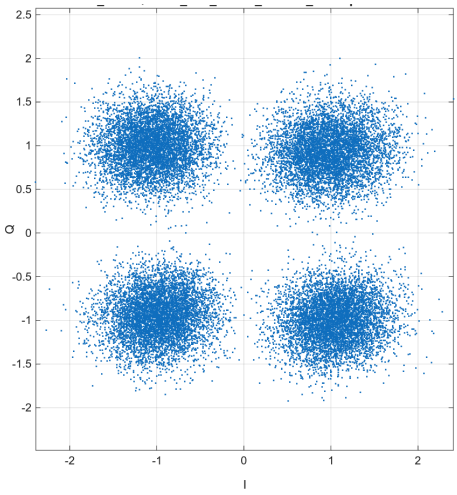

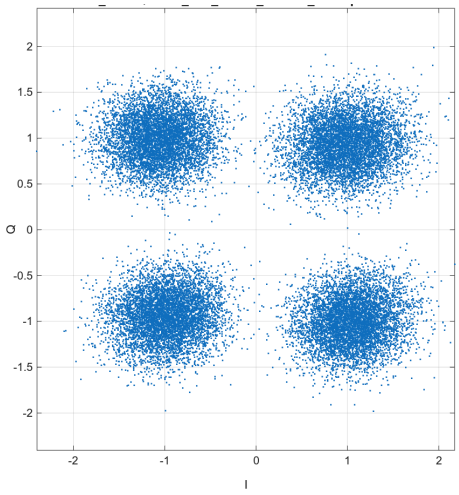

Representative BER: 0.00038347 | configuration mean: 0.00040207
Accepted / total captures: 10 / 10 | ID: cfg_3872825ec56c7eeb9967

Constellations | configurations 49-50

QPSK | 640 km | 3 dBm | wss offset 20GHz

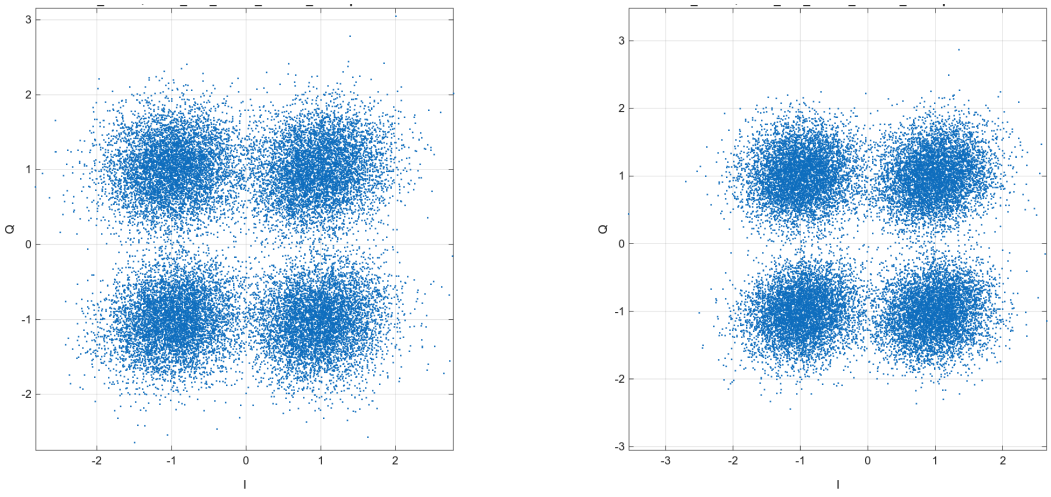

Representative BER: 0.0058866 | configuration mean: 0.0059183
Accepted / total captures: 10 / 10 | ID: cfg_ab6b6c7b2c61ac3dddf2

QPSK | 640 km | 3 dBm | wss offset 24GHz

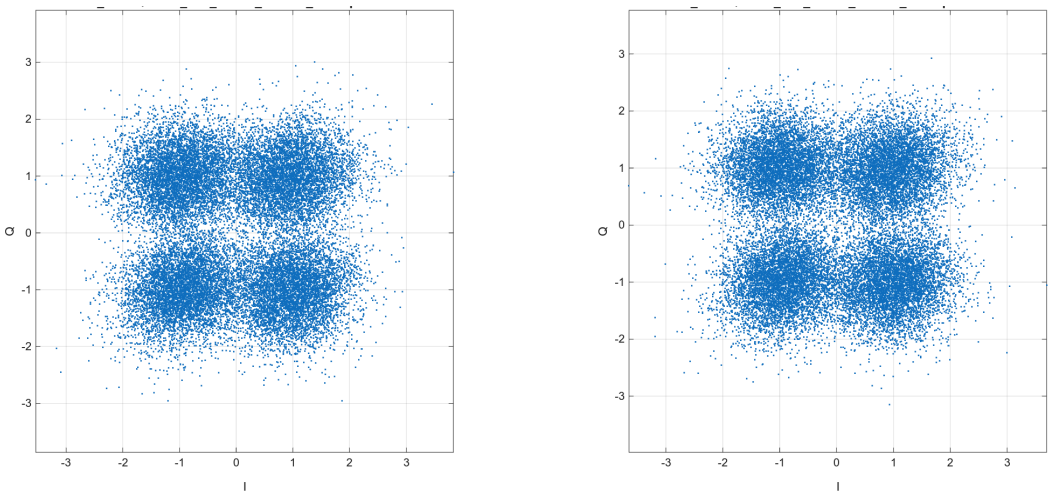

Representative BER: 0.022224 | configuration mean: 0.022634
Accepted / total captures: 10 / 10 | ID: cfg_b5962542c740b4826554

Constellations | configurations 51-52

QPSK | 640 km | 3 dBm | wss bandwidth 55GHz

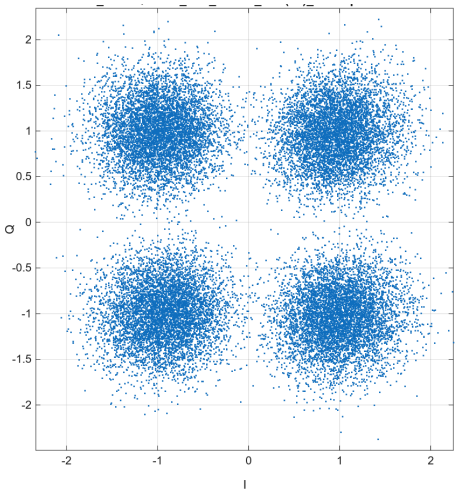

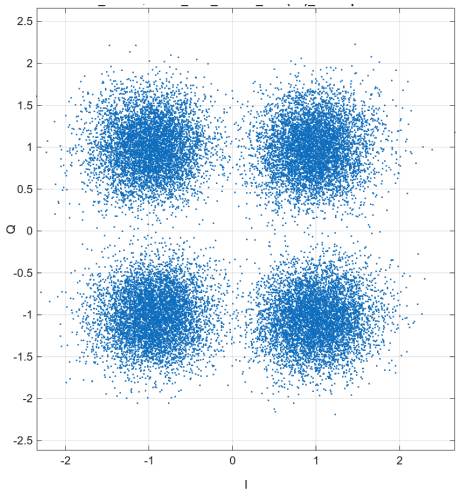

Representative BER: 0.0011275 | configuration mean: 0.001074
Accepted / total captures: 10 / 10 | ID: cfg_caa43cd0c7967b2db072

QPSK | 640 km | 3 dBm | wss bandwidth 60GHz

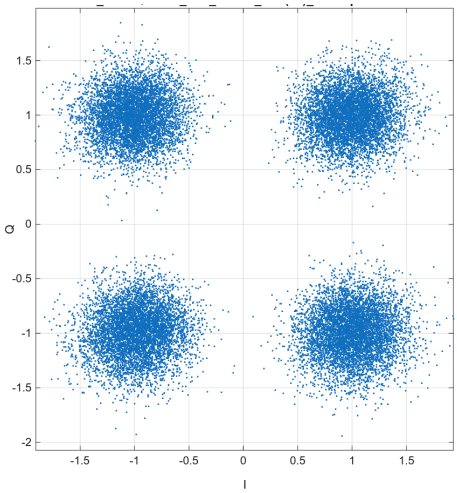

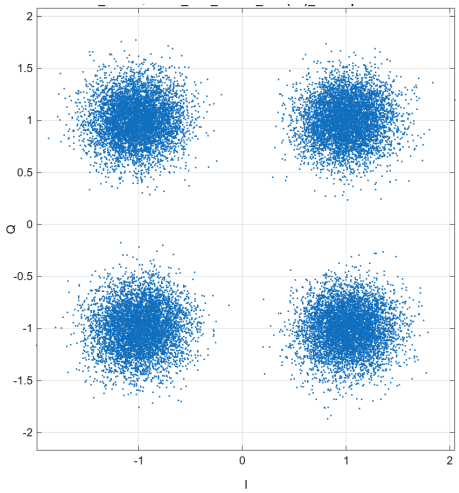

Representative BER: 5.7234e-06 | configuration mean: 3.2194e-06
Accepted / total captures: 8 / 10 | ID: cfg_4fd6509110dd37b47518

Constellations | configurations 53-54

QPSK | 640 km | 3 dBm | wss bandwidth 65GHz

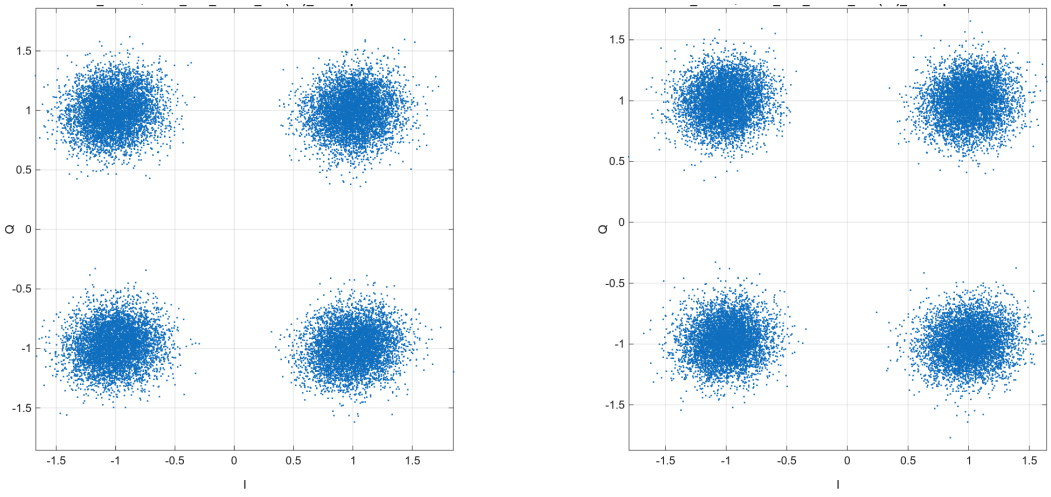

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 5 / 10 | ID: cfg_cdaf6ec150833276e2e7

QPSK | 640 km | 3 dBm | wss bandwidth 70GHz

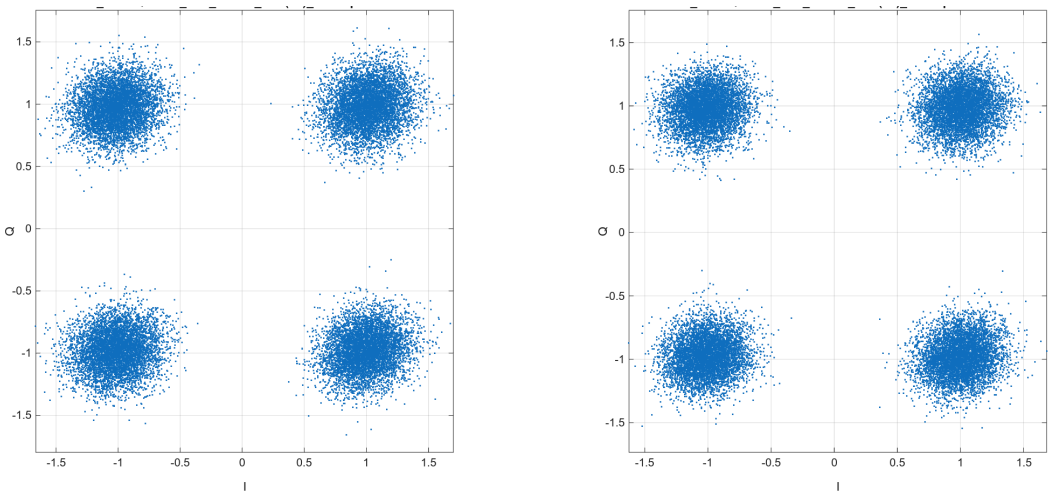

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_b4a96ed066686d4f5e0d

Constellations | configurations 55-56

QPSK | 640 km | 3 dBm | Normal (75 GHz)

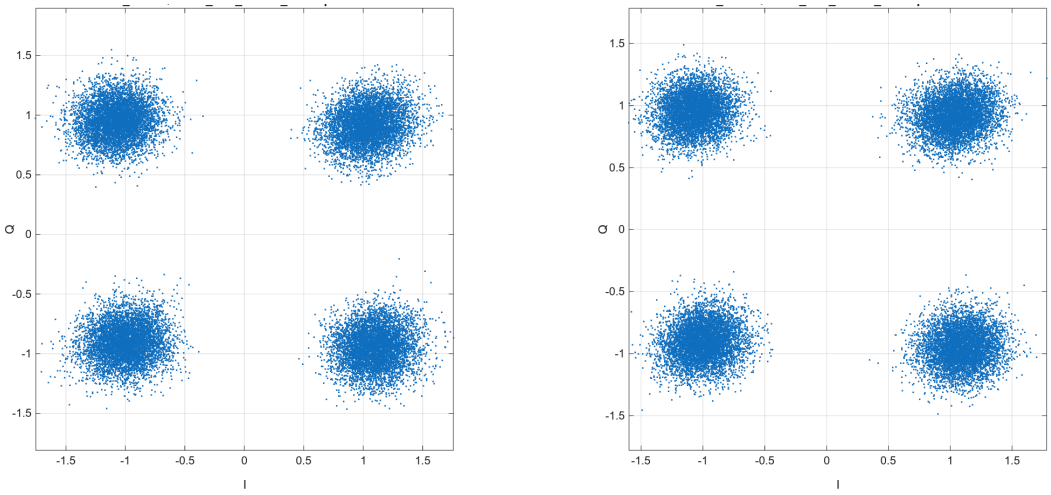

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 15 / 26 | ID: cfg_3e2bf3ce6595767ee094

QPSK | 640 km | 5 dBm | wss offset 4GHz

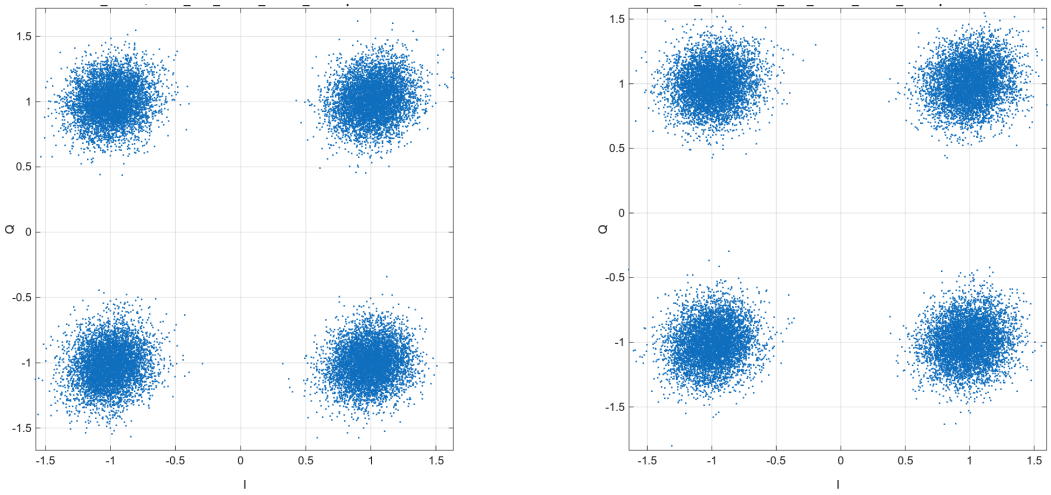

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 9 / 10 | ID: cfg_e84d0e610fed475ea18d

Constellations | configurations 57-58

QPSK | 640 km | 5 dBm | wss offset 8GHz

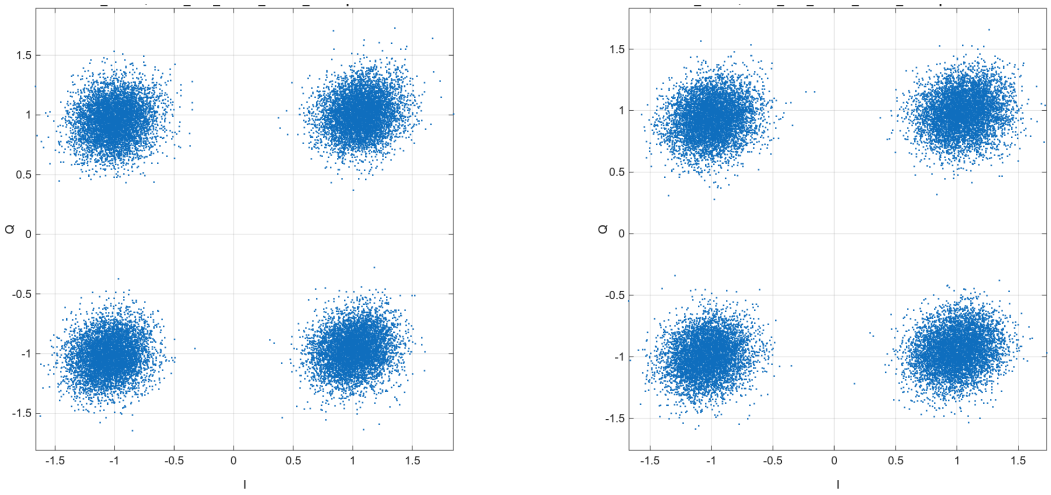

Representative BER: 0 | configuration mean: 6.3594e-07
Accepted / total captures: 9 / 10 | ID: cfg_628a6ee61859e5fb4265

QPSK | 640 km | 5 dBm | wss offset 12GHz

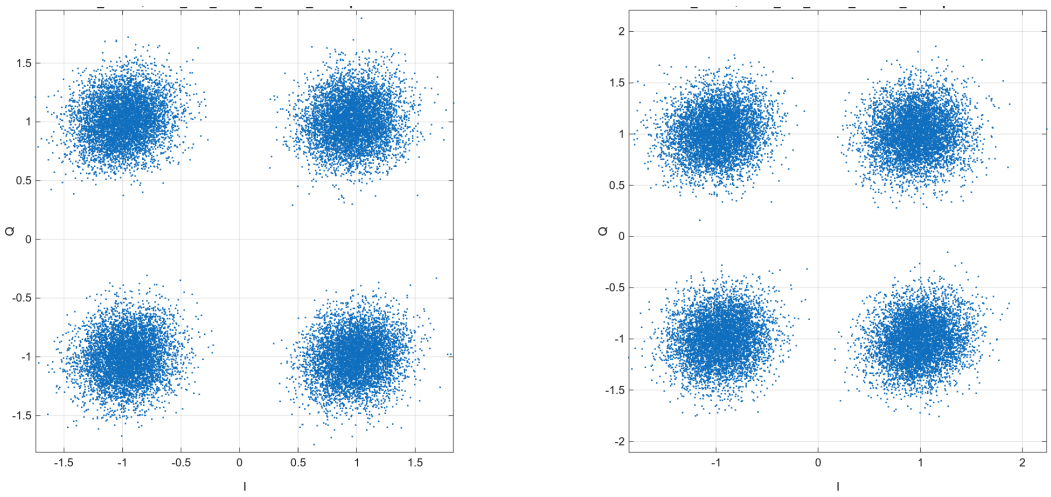

Representative BER: 5.7234e-06 | configuration mean: 6.0414e-06
Accepted / total captures: 9 / 10 | ID: cfg_0f829788eed7ed5d9f3f

Constellations | configurations 59-60

QPSK | 640 km | 5 dBm | wss offset 16GHz

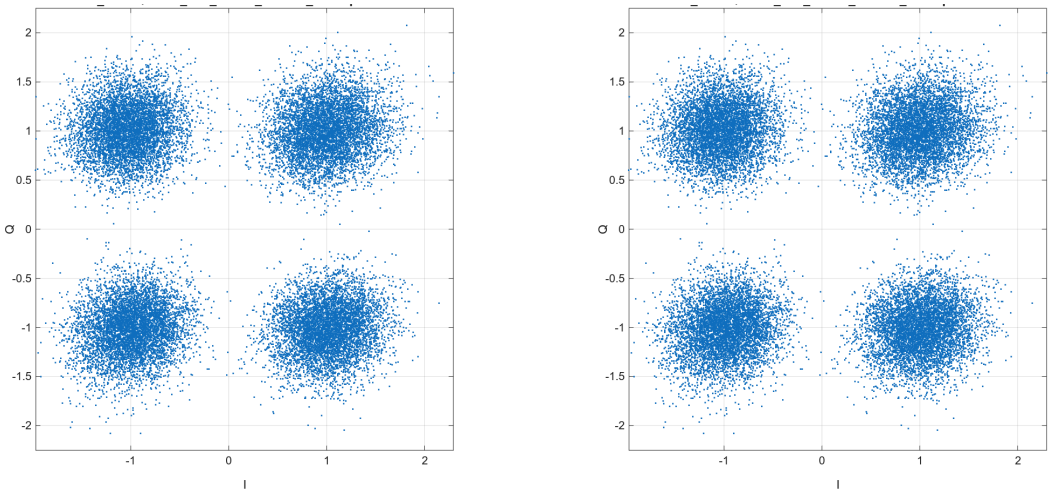

Representative BER: 0.00015453 | configuration mean: 0.00014995
Accepted / total captures: 5 / 10 | ID: cfg_9768b69e88da8eec6193

QPSK | 640 km | 5 dBm | wss offset 20GHz

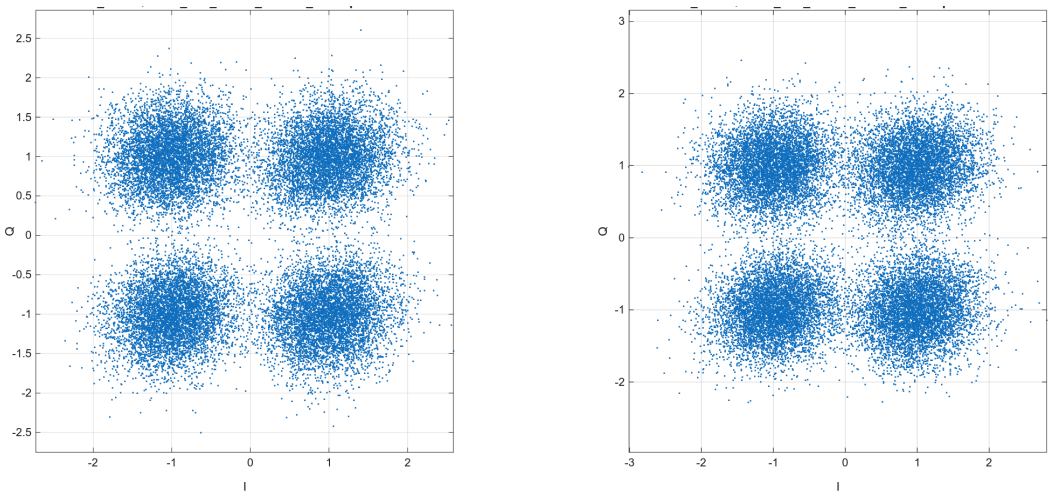

Representative BER: 0.0049536 | configuration mean: 0.0052484
Accepted / total captures: 5 / 10 | ID: cfg_c6d282357b2d8d30755e

Constellations | configurations 61-62

QPSK | 640 km | 5 dBm | wss offset 24GHz

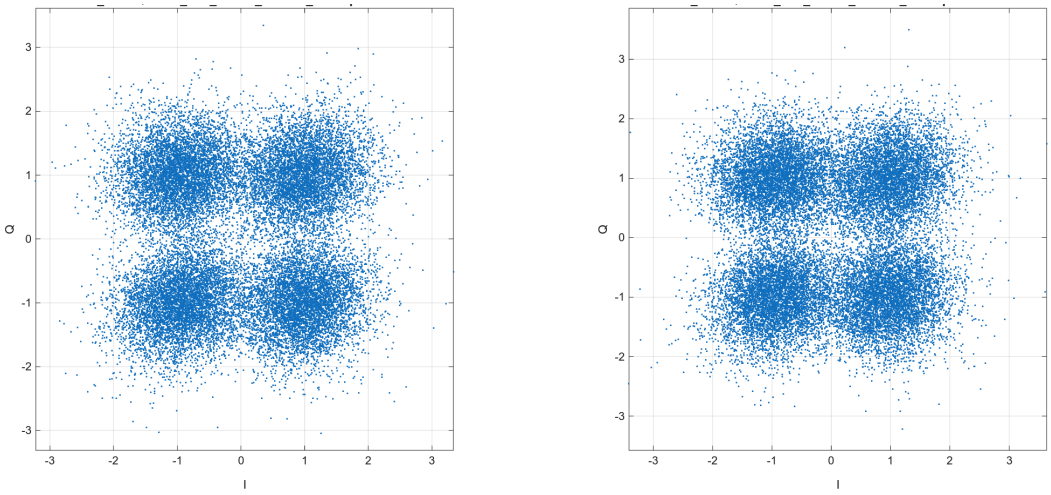

Representative BER: 0.02116 | configuration mean: 0.020876
Accepted / total captures: 10 / 10 | ID: cfg_aba84d9288e28f73cd97

QPSK | 640 km | 5 dBm | wss bandwidth 55GHz

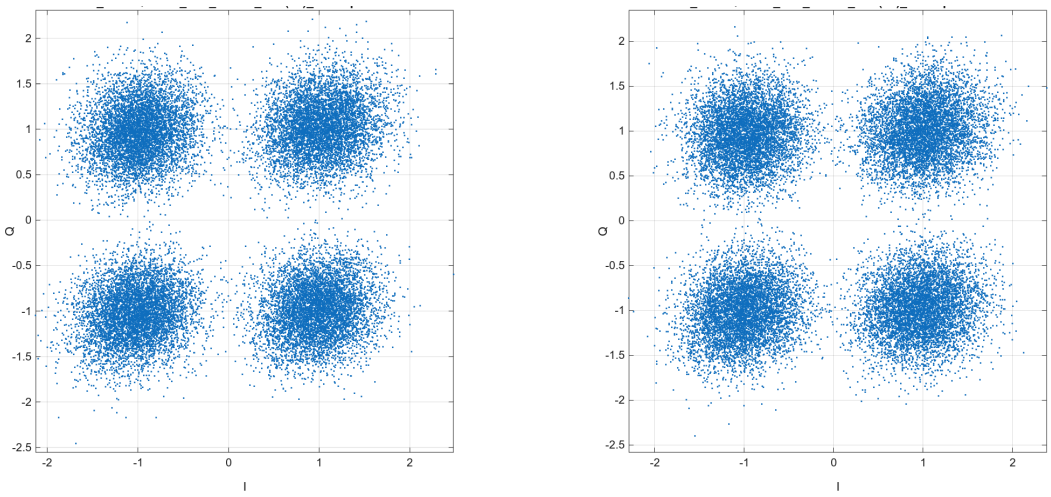

Representative BER: 0.00079556 | configuration mean: 0.0007927
Accepted / total captures: 2 / 10 | ID: cfg_e4f027694f79efa71b78

Constellations | configurations 63-64

QPSK | 640 km | 5 dBm | wss bandwidth 60GHz

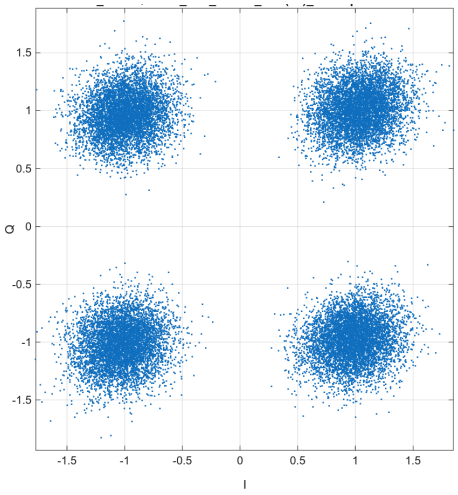

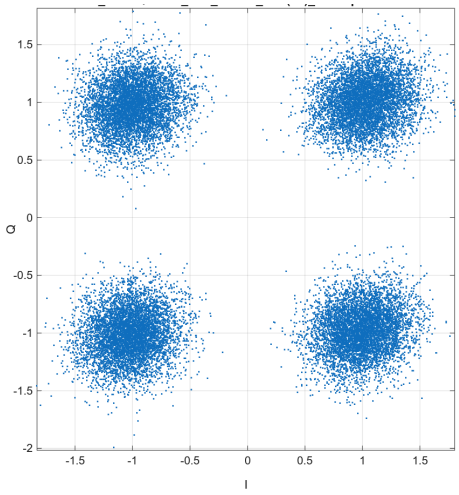

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 2 / 10 | ID: cfg_044b17166fe6a9a290e2

QPSK | 640 km | 5 dBm | wss bandwidth 65GHz

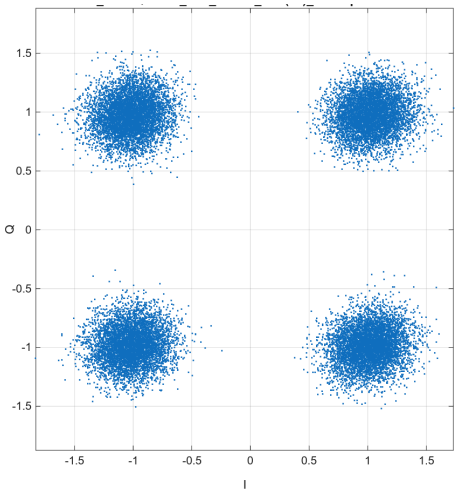

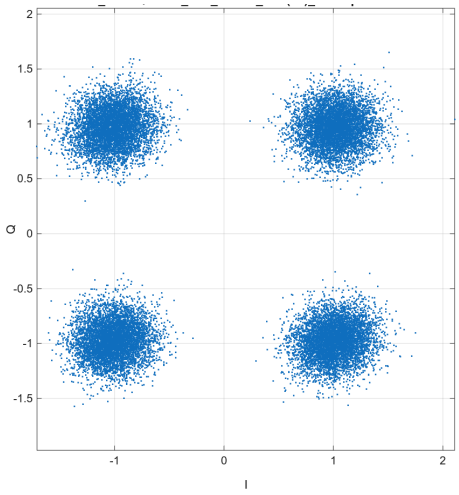

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 5 / 10 | ID: cfg_d45505f2262e30bfed4f

Constellations | configurations 65-66

QPSK | 640 km | 5 dBm | wss bandwidth 70GHz

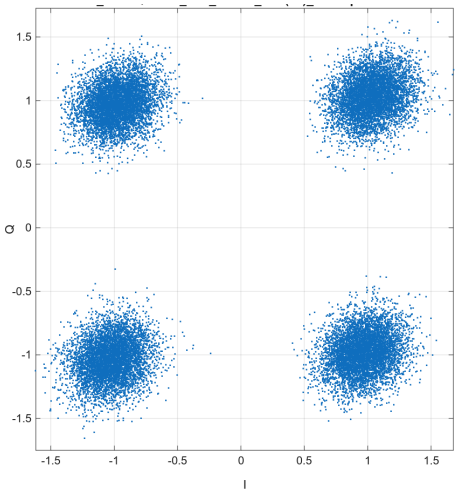

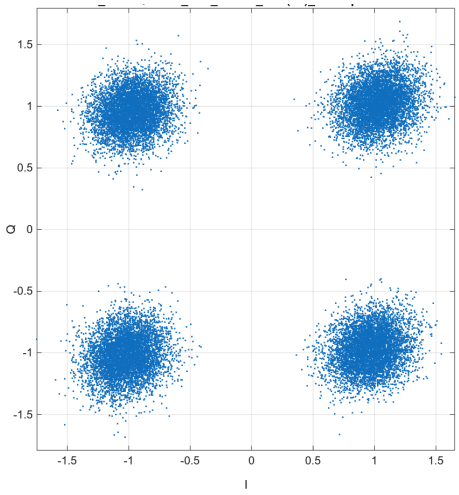

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_ba0c3450c9268ba6088d

QPSK | 640 km | 5 dBm | Normal (75 GHz)

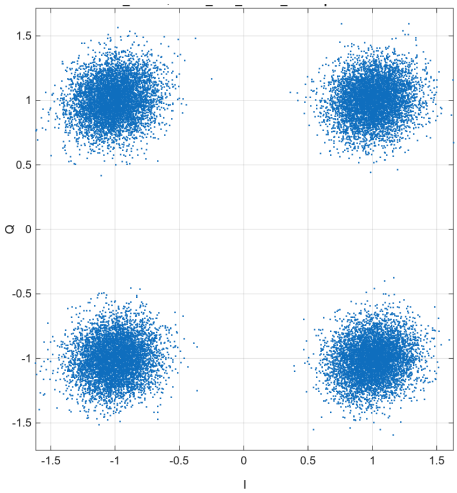

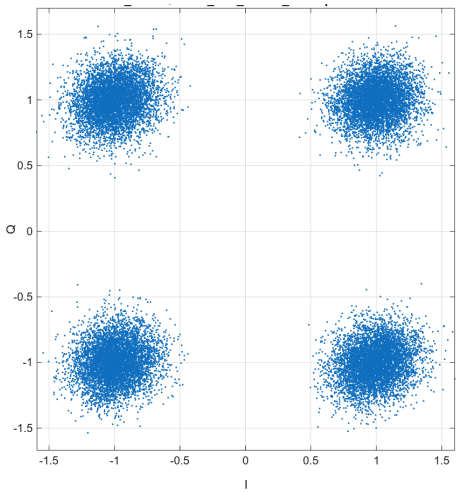

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 22 / 26 | ID: cfg_e8d149813ddf01c6a80d

Constellations | configurations 67-68

QPSK | 960 km | 1 dBm | attenuation 3dB

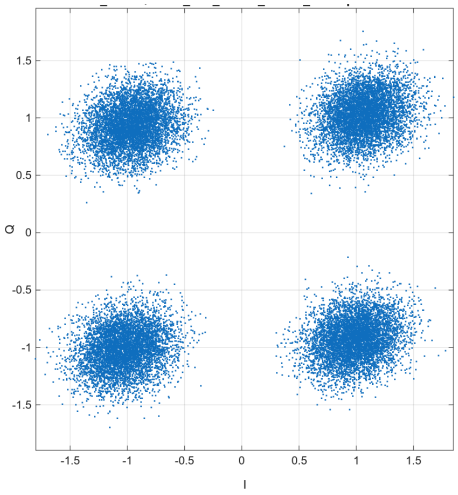

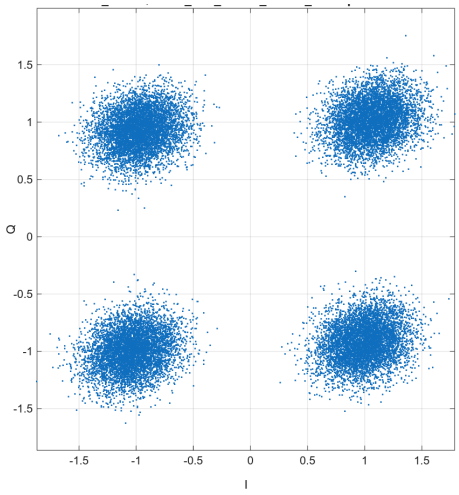

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 8 / 10 | ID: cfg_2ce00925d77b60954df5

QPSK | 960 km | 1 dBm | attenuation 5dB

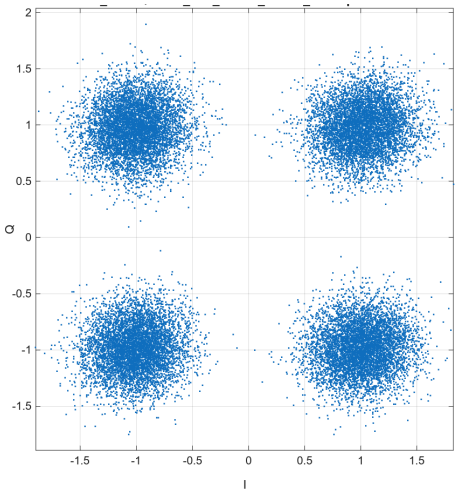

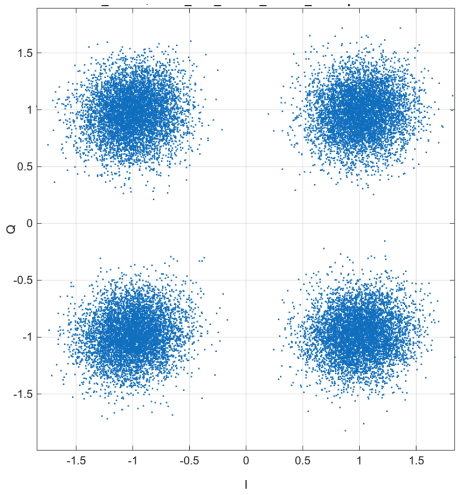

Representative BER: 0 | configuration mean: 7.6313e-06
Accepted / total captures: 3 / 10 | ID: cfg_9ef43b1c55415a9eb116

Constellations | configurations 69-70

QPSK | 960 km | 1 dBm | edfa 1dB

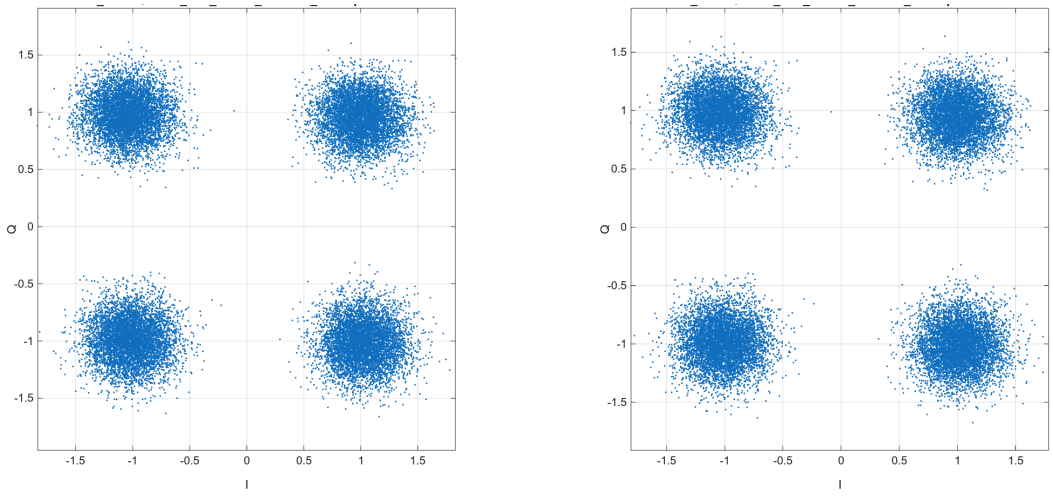

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 7 / 10 | ID: cfg_e00e4a86a7453806e419

QPSK | 960 km | 1 dBm | edfa 3dB

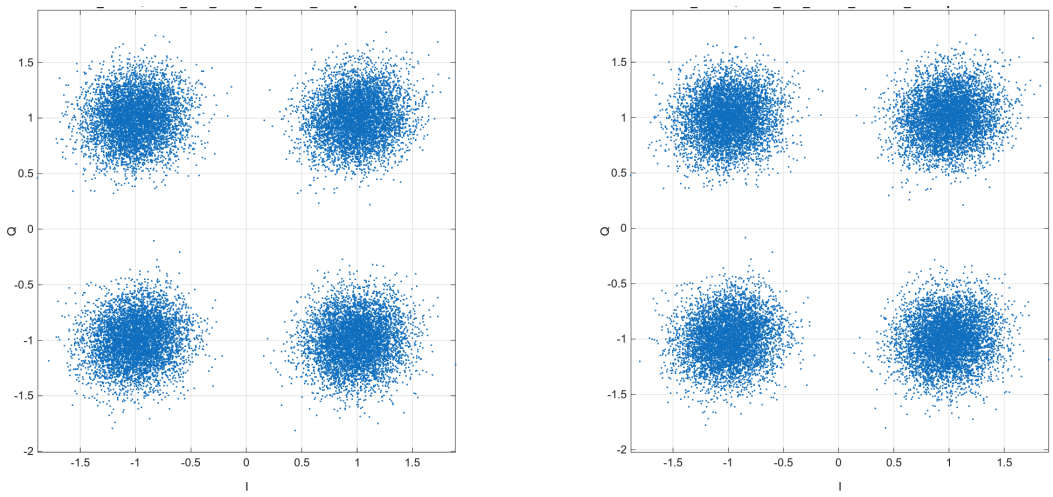

Representative BER: 0 | configuration mean: 2.4529e-06
Accepted / total captures: 7 / 10 | ID: cfg_81ba95316aba1d3c6321

Constellations | configurations 71-72

QPSK | 960 km | 1 dBm | edfa 5dB

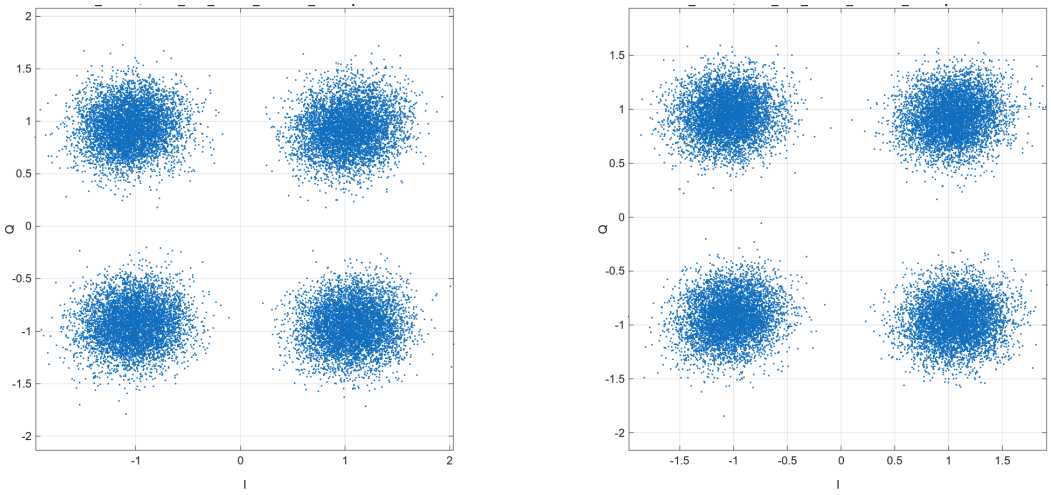

Representative BER: 2.8617e-06 | configuration mean: 3.7202e-06
Accepted / total captures: 10 / 10 | ID: cfg_d53318b42732c2384b6a

QPSK | 960 km | 1 dBm | edfa 9dB

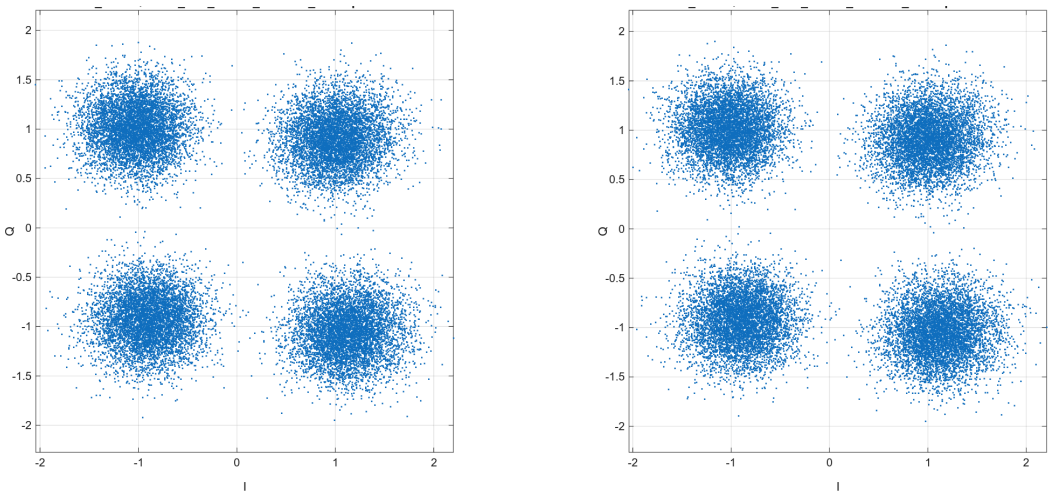

Representative BER: 9.4437e-05 | configuration mean: 9.3801e-05
Accepted / total captures: 9 / 10 | ID: cfg_5a9353e945cea9cf9dcb

Constellations | configurations 73-74

QPSK | 960 km | 1 dBm | wss offset 4GHz

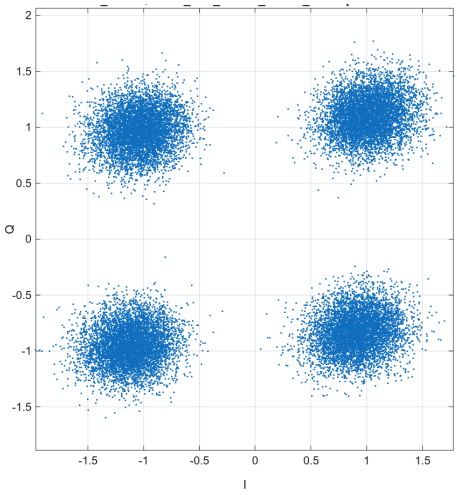

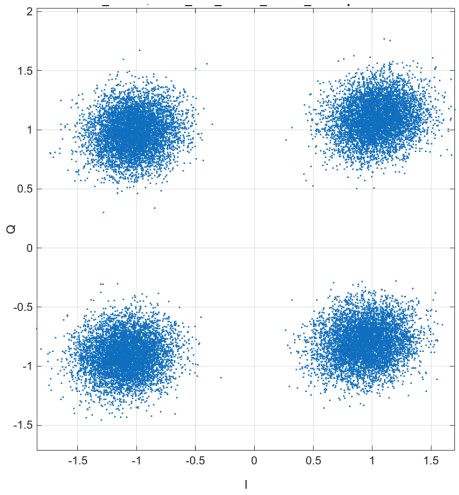

Representative BER: 0 | configuration mean: 1.9078e-06
Accepted / total captures: 3 / 10 | ID: cfg_6aaf37733e91f5d7267f

QPSK | 960 km | 1 dBm | wss offset 8GHz

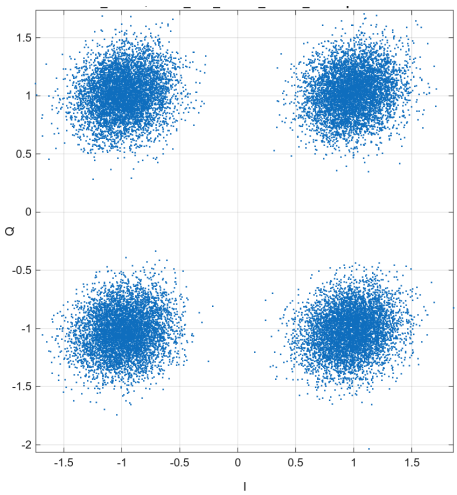

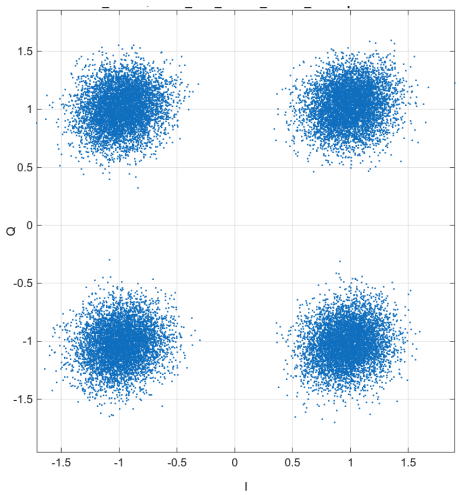

Representative BER: 0 | configuration mean: 4.0882e-07
Accepted / total captures: 7 / 10 | ID: cfg_cd007544dafb5eebf109

Constellations | configurations 75-76

QPSK | 960 km | 1 dBm | wss offset 12GHz

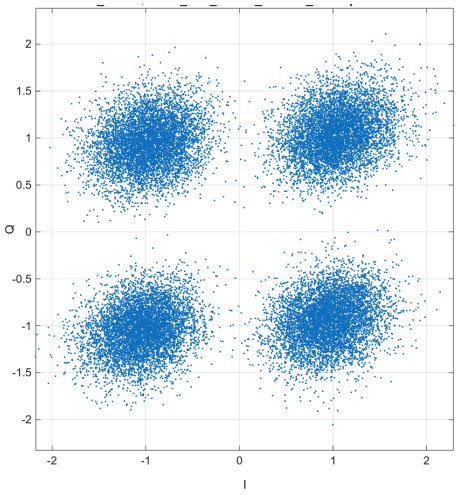

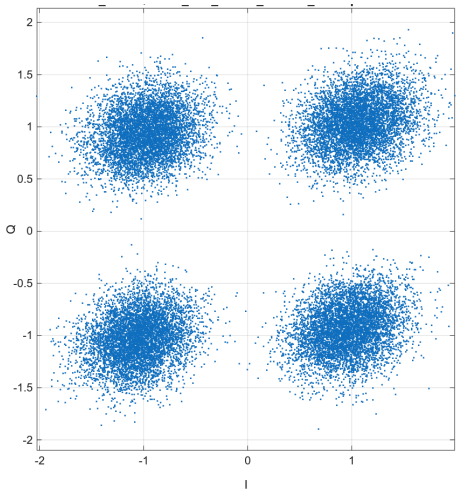

Representative BER: 0.00016598 | configuration mean: 0.00015024
Accepted / total captures: 4 / 10 | ID: cfg_92a41ce00a9851e613e9

QPSK | 960 km | 1 dBm | wss offset 16GHz

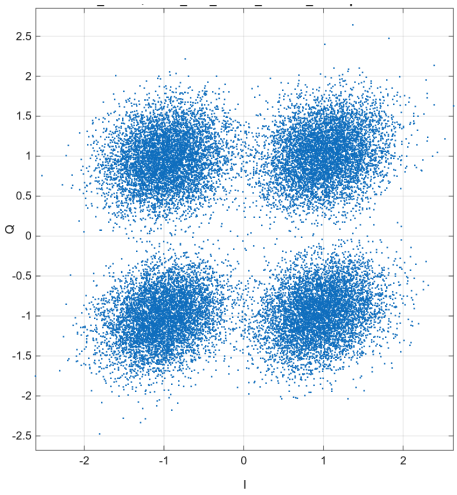

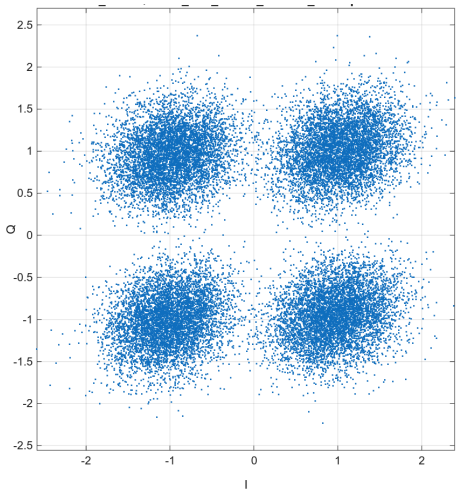

Representative BER: 0.0026128 | configuration mean: 0.0025927
Accepted / total captures: 8 / 10 | ID: cfg_dab907bf71a3144cff7c

Constellations | configurations 77-78

QPSK | 960 km | 1 dBm | wss offset 20GHz

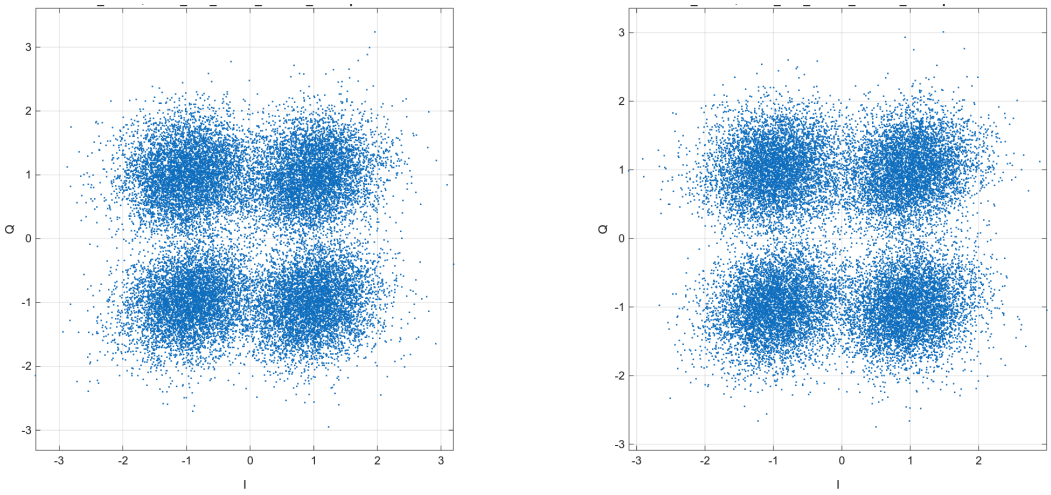

Representative BER: 0.013905 | configuration mean: 0.014129
Accepted / total captures: 10 / 10 | ID: cfg_a96137d53efe92be5783

QPSK | 960 km | 1 dBm | wss offset 24GHz

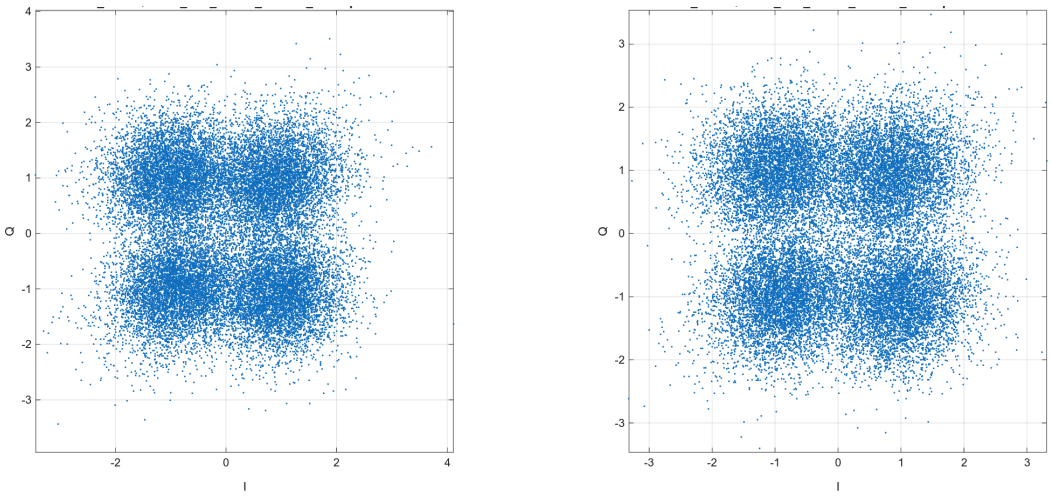

Representative BER: 0.035697 | configuration mean: 0.03595
Accepted / total captures: 10 / 10 | ID: cfg_310b7a907758c462f1da

Constellations | configurations 79-80

QPSK | 960 km | 1 dBm | wss bandwidth 55GHz

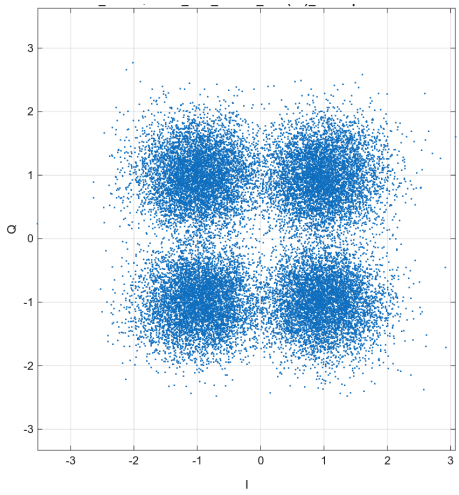

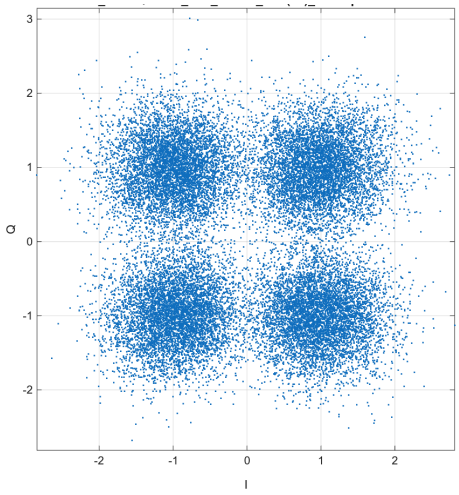

Representative BER: 0.0096039 | configuration mean: 0.009561
Accepted / total captures: 10 / 10 | ID: cfg_668a43688f9e865b897a

QPSK | 960 km | 1 dBm | wss bandwidth 60GHz

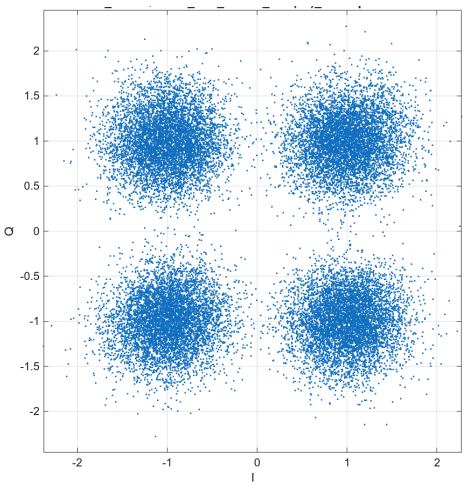

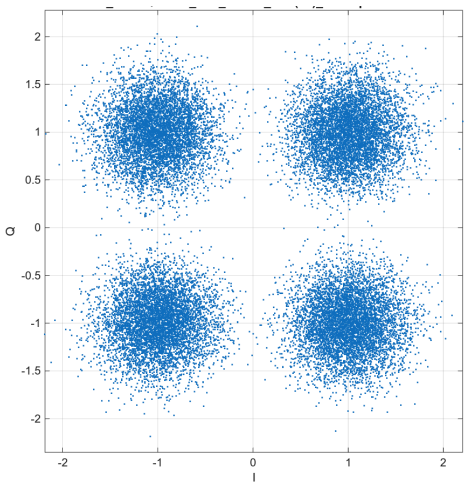

Representative BER: 0.00047791 | configuration mean: 0.00043975
Accepted / total captures: 6 / 10 | ID: cfg_5f884ed667822b035bd2

Constellations | configurations 81-82

QPSK | 960 km | 1 dBm | wss bandwidth 65GHz

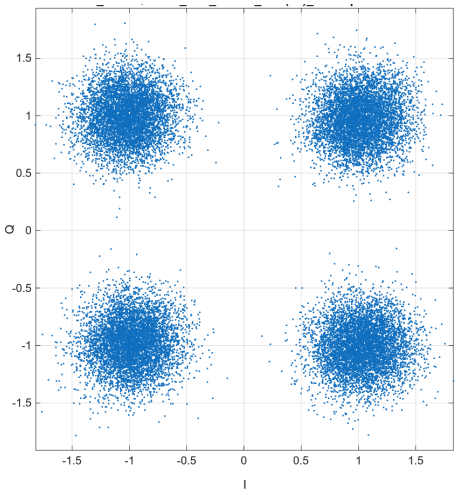

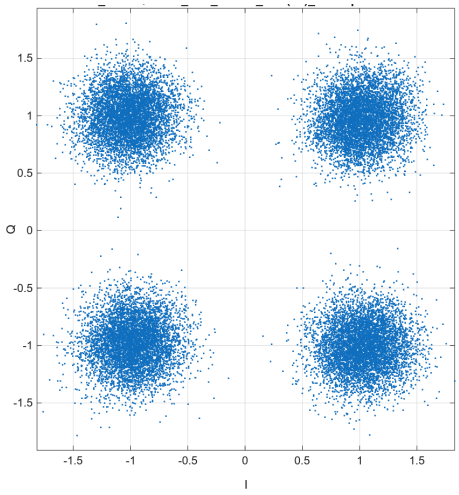

Representative BER: 5.7234e-06 | configuration mean: 3.4341e-06
Accepted / total captures: 5 / 10 | ID: cfg_adfd25ca0cf2666aaa40

QPSK | 960 km | 1 dBm | wss bandwidth 70GHz

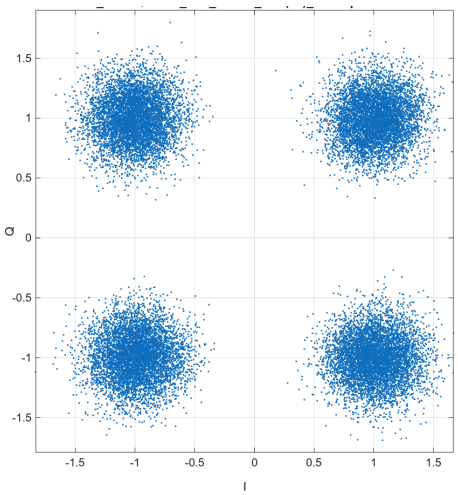

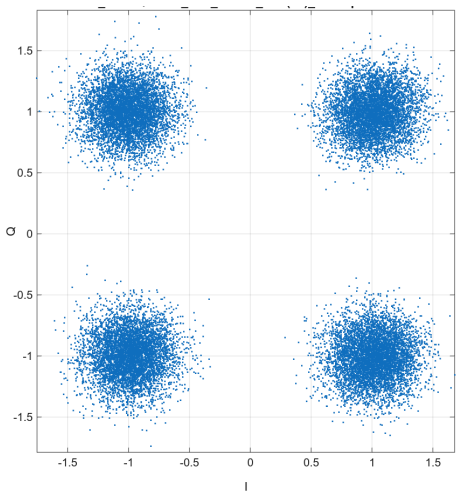

Representative BER: 2.8617e-06 | configuration mean: 1.5898e-06
Accepted / total captures: 9 / 10 | ID: cfg_e5c52428afdc8c4e546a

Constellations | configurations 83-84

QPSK | 960 km | 1 dBm | Normal (75 GHz)

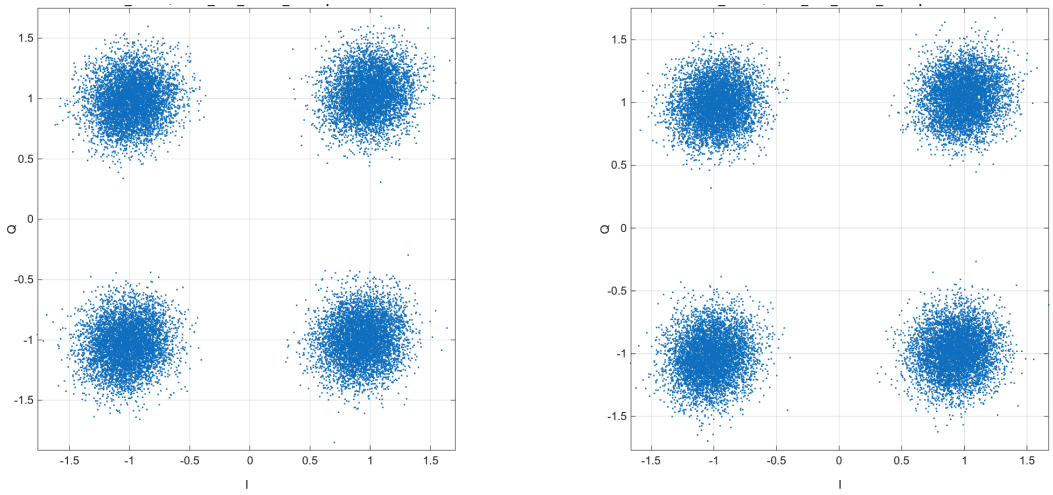

Representative BER: 0 | configuration mean: 1.3627e-07
Accepted / total captures: 21 / 26 | ID: cfg_b0718b21274941533d64

QPSK | 960 km | 3 dBm | attenuation 3dB

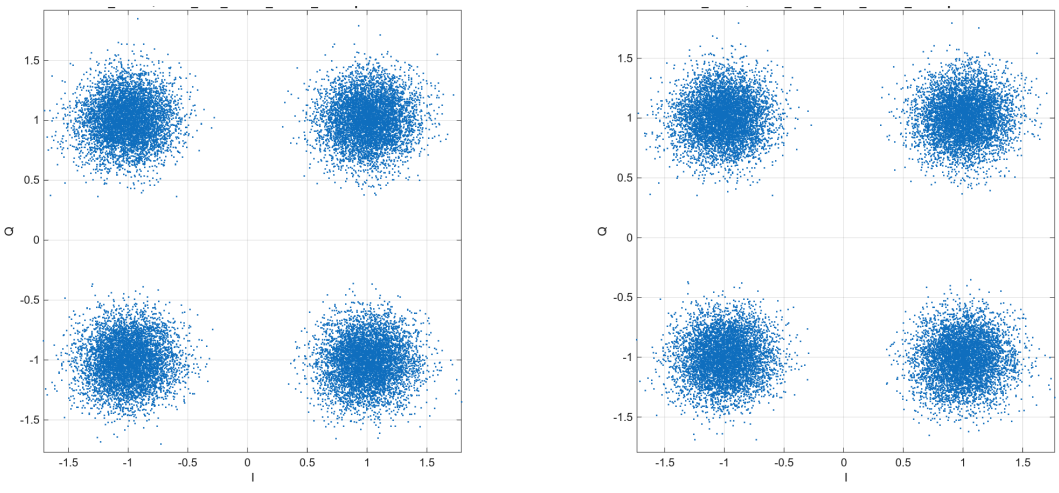

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 7 / 10 | ID: cfg_c6785fadaed35625391f

Constellations | configurations 85-86

QPSK | 960 km | 3 dBm | attenuation 5dB

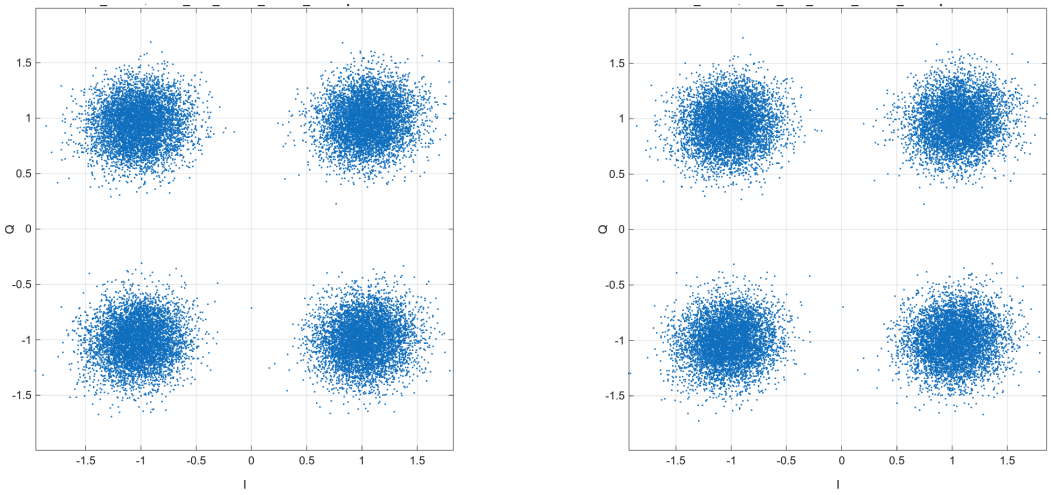

Representative BER: 0 | configuration mean: 1.1447e-06
Accepted / total captures: 10 / 10 | ID: cfg_40676724506c842b1f41

QPSK | 960 km | 3 dBm | edfa 1dB

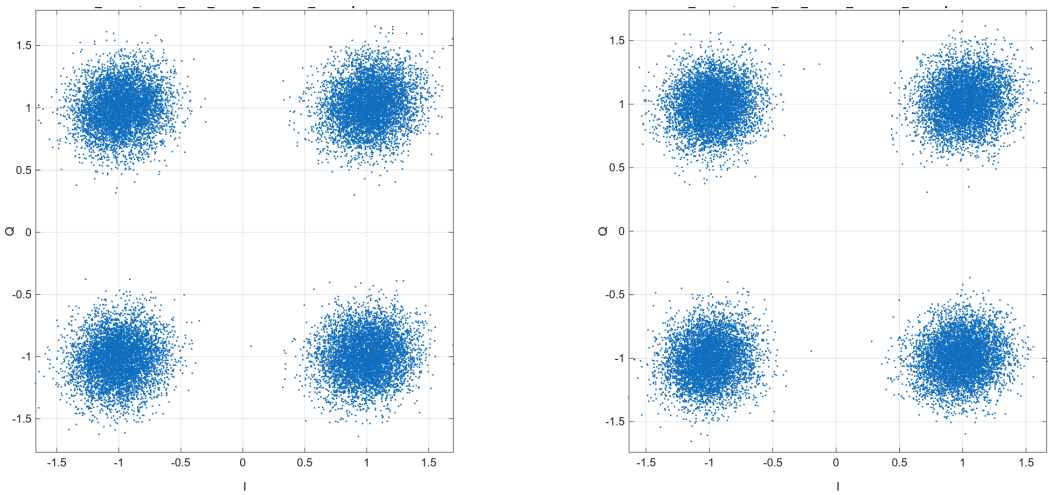

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_9f7e543dfb1b5069e1aa

Constellations | configurations 87-88

QPSK | 960 km | 3 dBm | edfa 3dB

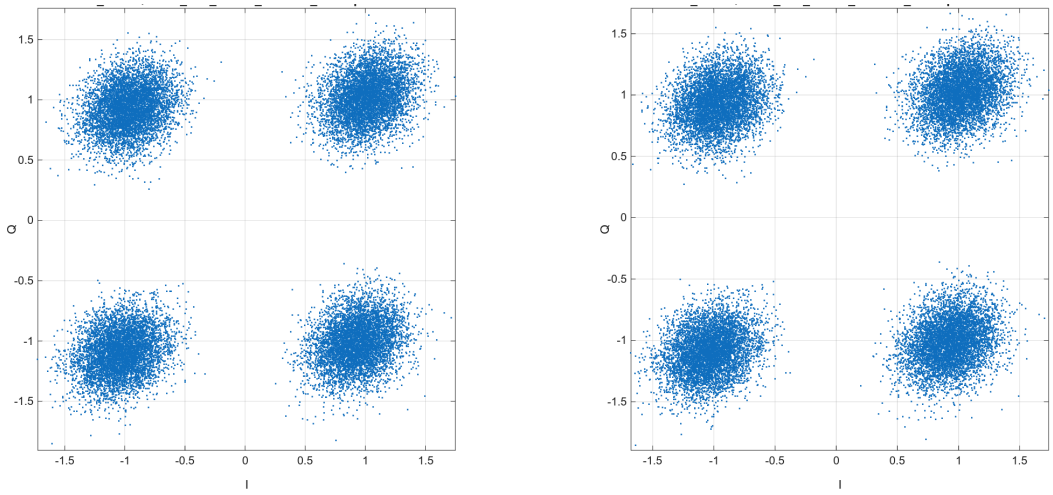

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 8 / 10 | ID: cfg_1eb4e70f2a17e1b3a00e

QPSK | 960 km | 3 dBm | edfa 5dB

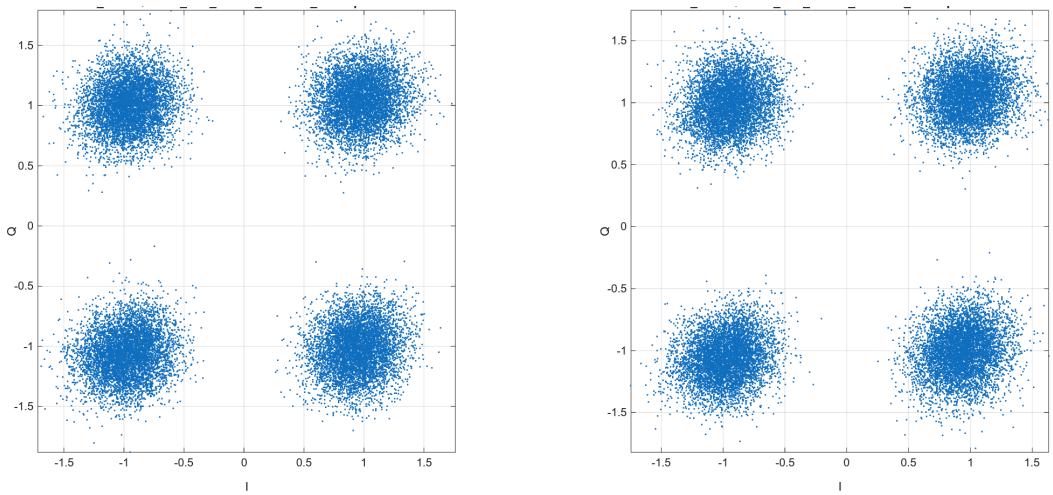

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 6 / 10 | ID: cfg_30c0eb3140a12461d001

Constellations | configurations 89-90

QPSK | 960 km | 3 dBm | edfa 9dB

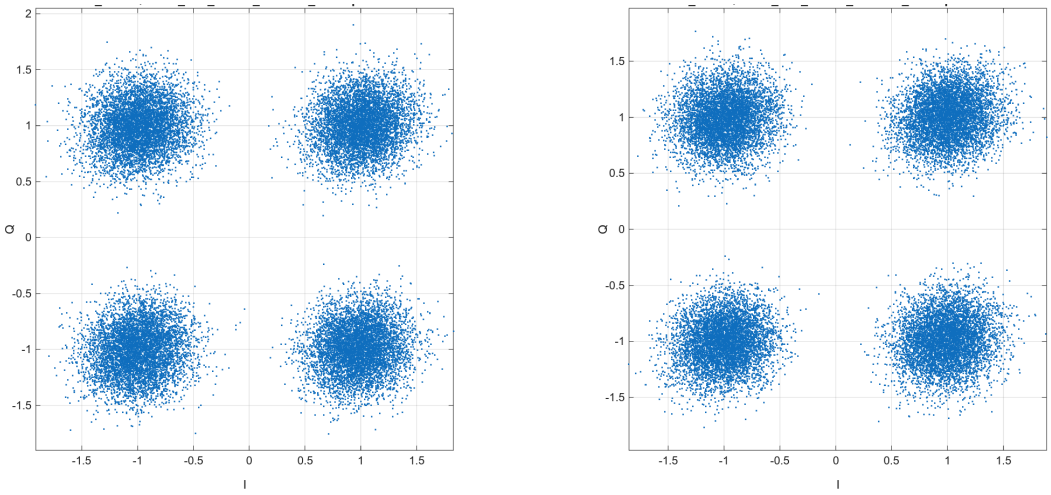

Representative BER: 5.7234e-06 | configuration mean: 5.008e-06
Accepted / total captures: 4 / 10 | ID: cfg_f19d0b82033c253119b5

QPSK | 960 km | 3 dBm | wss offset 4GHz

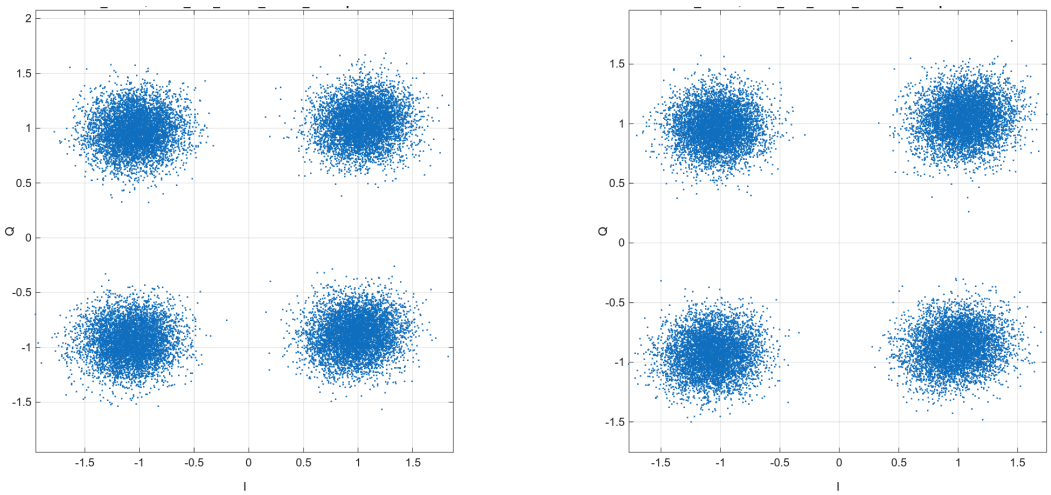

Representative BER: 0 | configuration mean: 8.5852e-07
Accepted / total captures: 10 / 10 | ID: cfg_d56481296958ecad5d12

Constellations | configurations 91-92

QPSK | 960 km | 3 dBm | wss offset 8GHz

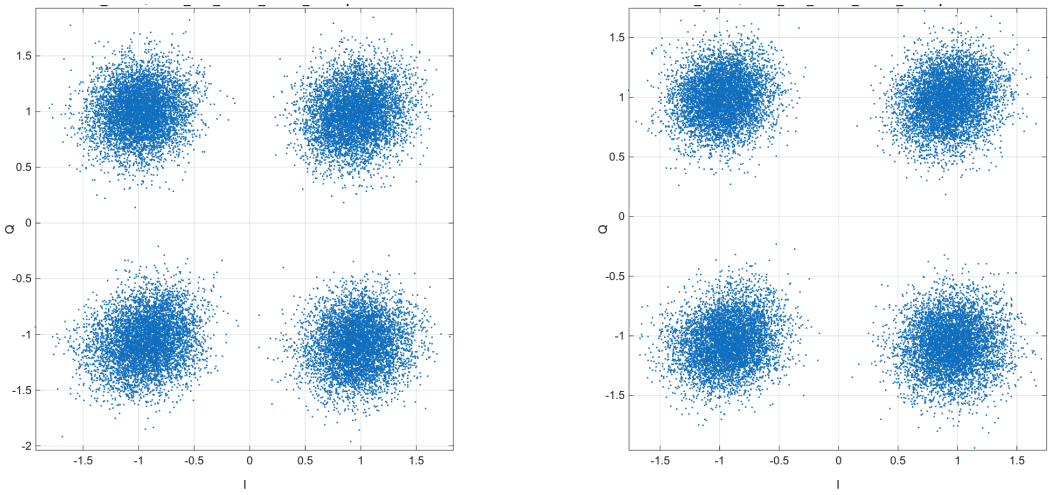

Representative BER: 2.8617e-06 | configuration mean: 4.0064e-06
Accepted / total captures: 10 / 10 | ID: cfg_11a8ea316c0881d65956

QPSK | 960 km | 3 dBm | wss offset 12GHz

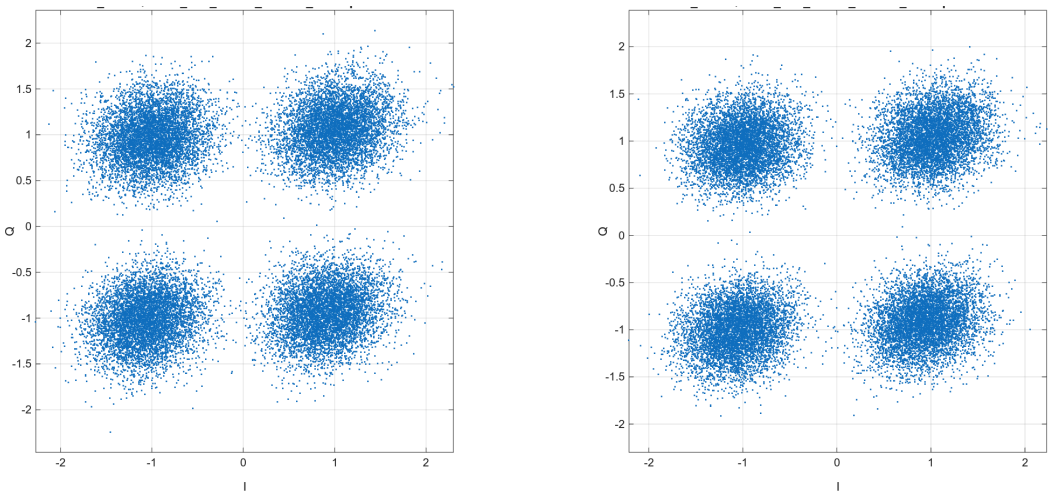

Representative BER: 0.00032624 | configuration mean: 0.00030649
Accepted / total captures: 10 / 10 | ID: cfg_a0f6ec10d71b503142b9

Constellations | configurations 93-94

QPSK | 960 km | 3 dBm | wss offset 16GHz

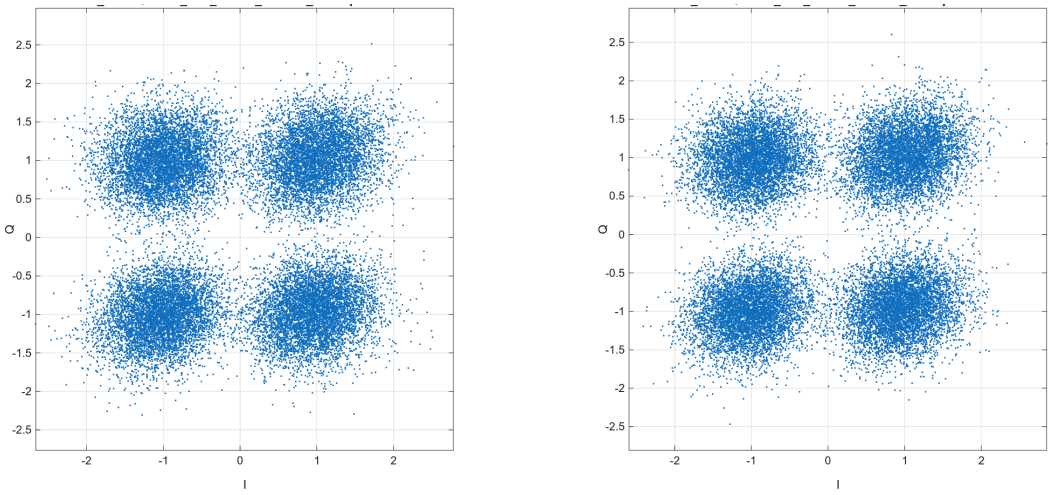

Representative BER: 0.0032738 | configuration mean: 0.0032721
Accepted / total captures: 10 / 10 | ID: cfg_c55347a865ebed722eda

QPSK | 960 km | 3 dBm | wss offset 20GHz

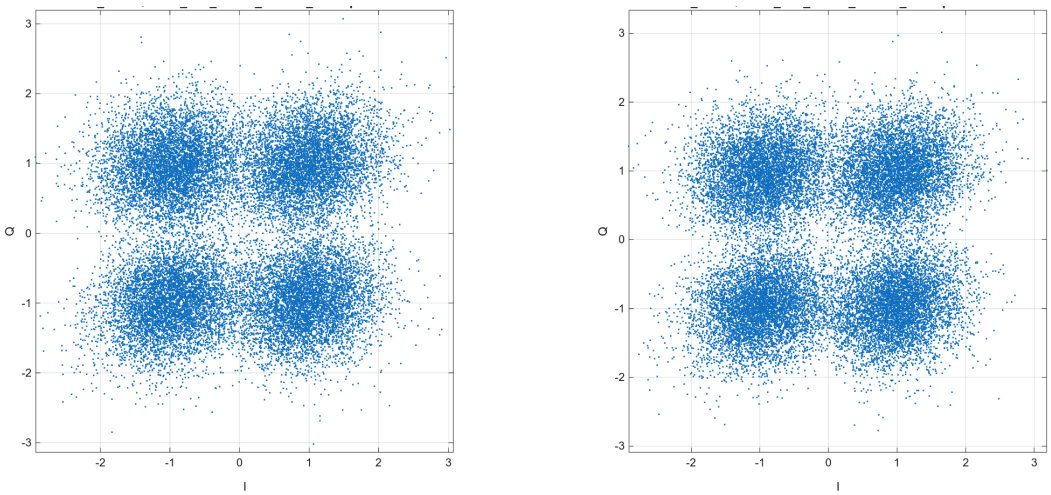

Representative BER: 0.015885 | configuration mean: 0.015789
Accepted / total captures: 10 / 10 | ID: cfg_6b38e5d41532f7584eab

Constellations | configurations 95-96

QPSK | 960 km | 3 dBm | wss offset 24GHz

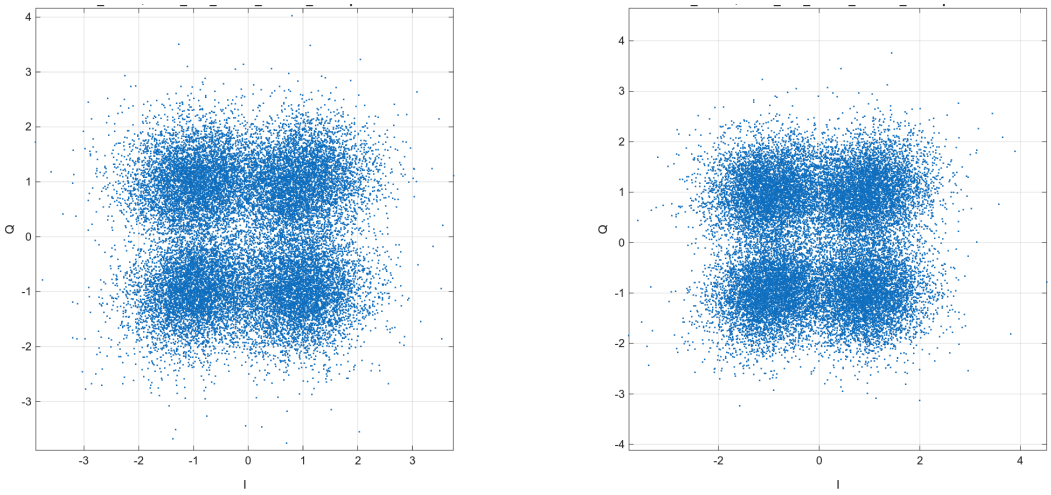

Representative BER: 0.038255 | configuration mean: 0.038203
Accepted / total captures: 10 / 10 | ID: cfg_59a2169be1b0bf07e56b

QPSK | 960 km | 3 dBm | wss bandwidth 55GHz

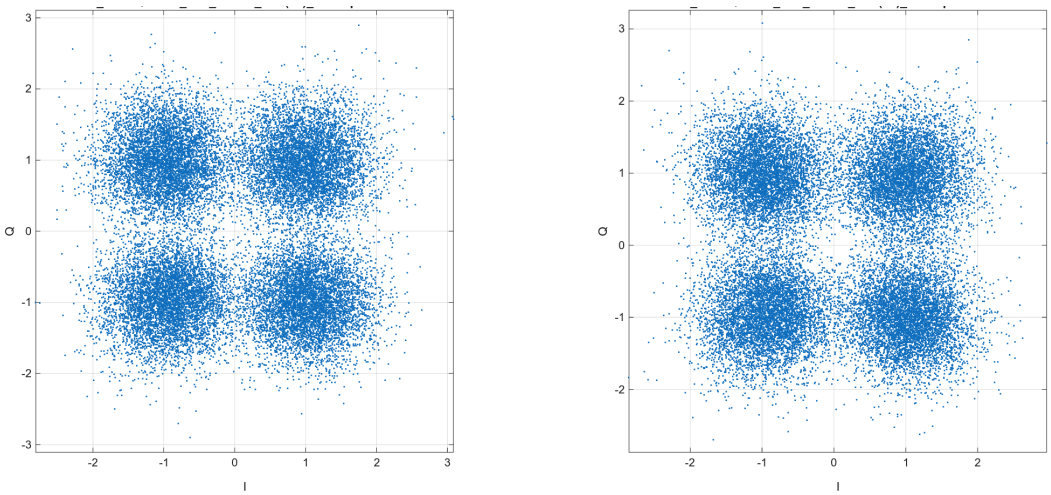

Representative BER: 0.010193 | configuration mean: 0.010239
Accepted / total captures: 10 / 10 | ID: cfg_adb4aa837c2793083bac

Constellations | configurations 97-98

QPSK | 960 km | 3 dBm | wss bandwidth 60GHz

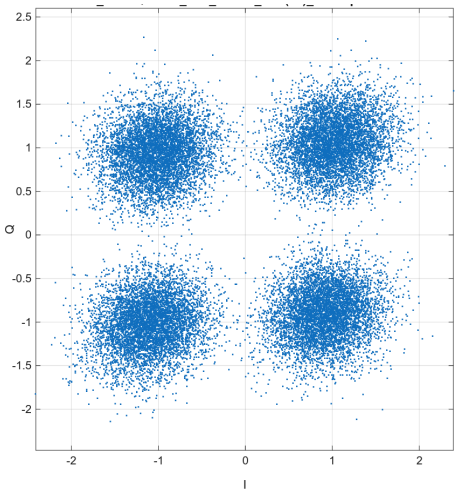

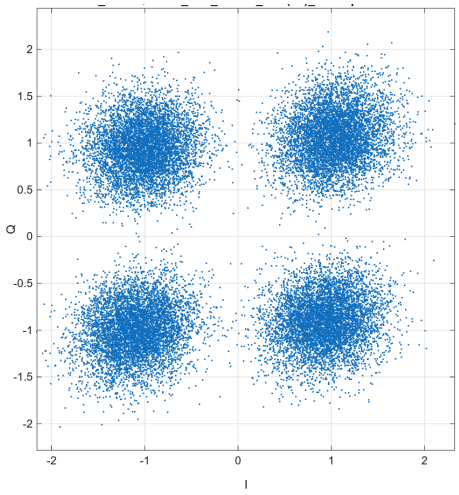

Representative BER: 0.00059524 | configuration mean: 0.00058637
Accepted / total captures: 10 / 10 | ID: cfg_de3bc98b137a89980a1e

QPSK | 960 km | 3 dBm | wss bandwidth 65GHz

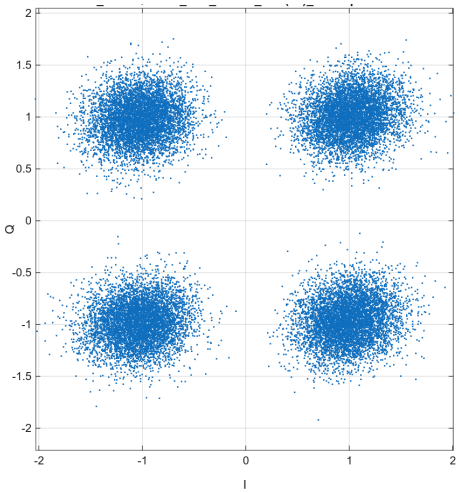

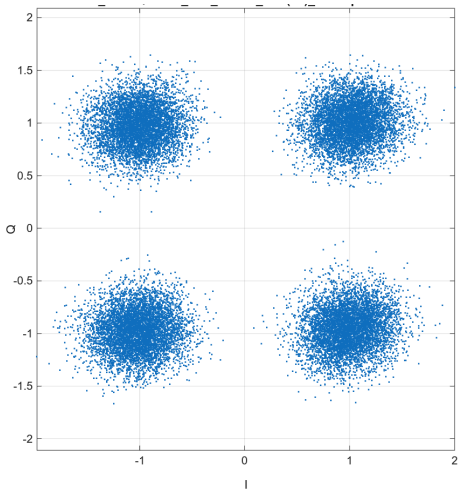

Representative BER: 2.8617e-06 | configuration mean: 4.8649e-06
Accepted / total captures: 10 / 10 | ID: cfg_3c6553253ccfb6828da6

Constellations | configurations 99-100

QPSK | 960 km | 3 dBm | wss bandwidth 70GHz

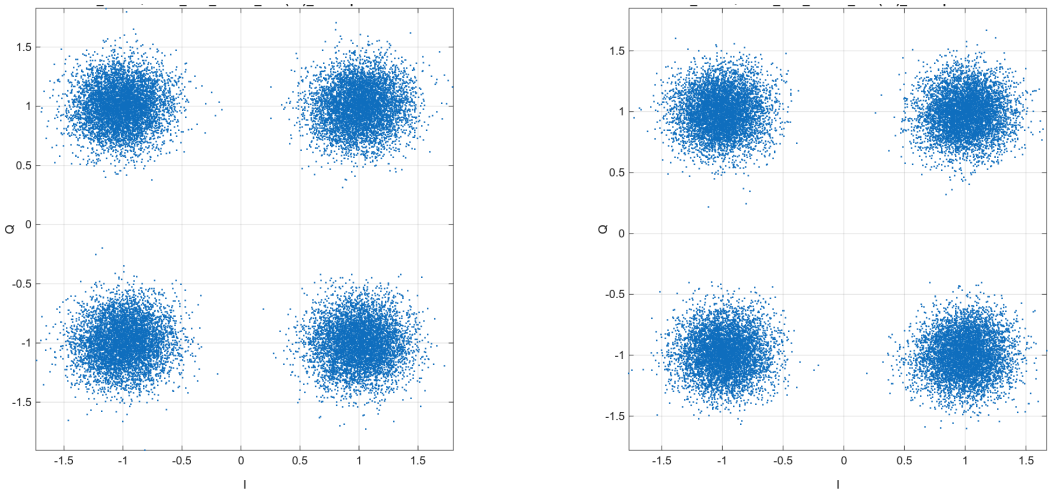

Representative BER: 0 | configuration mean: 2.8617e-07
Accepted / total captures: 10 / 10 | ID: cfg_9200d1b38ad31a384a1e

QPSK | 960 km | 3 dBm | Normal (75 GHz)

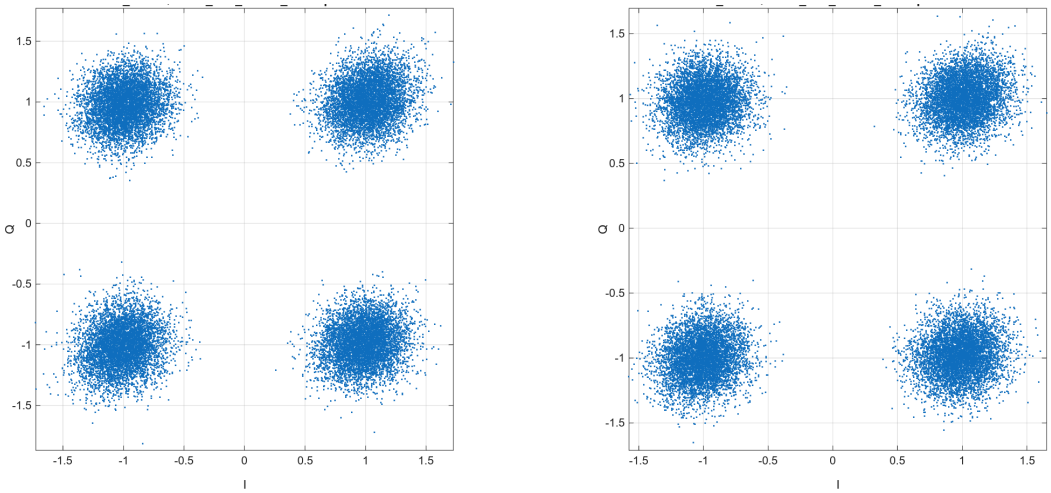

Representative BER: 0 | configuration mean: 1.1447e-07
Accepted / total captures: 25 / 26 | ID: cfg_b5767f6e6936b5b61c47

Constellations | configurations 101-102

QPSK | 960 km | 5 dBm | wss offset 4GHz

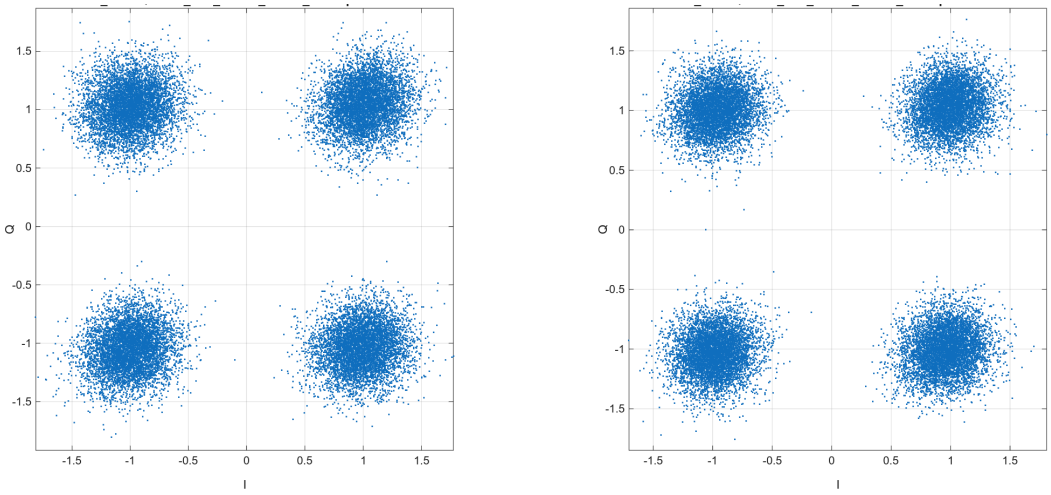

Representative BER: 2.8617e-06 | configuration mean: 2.0032e-06
Accepted / total captures: 10 / 10 | ID: cfg_8b7c0d10f92dc5e4e53b

QPSK | 960 km | 5 dBm | wss offset 8GHz

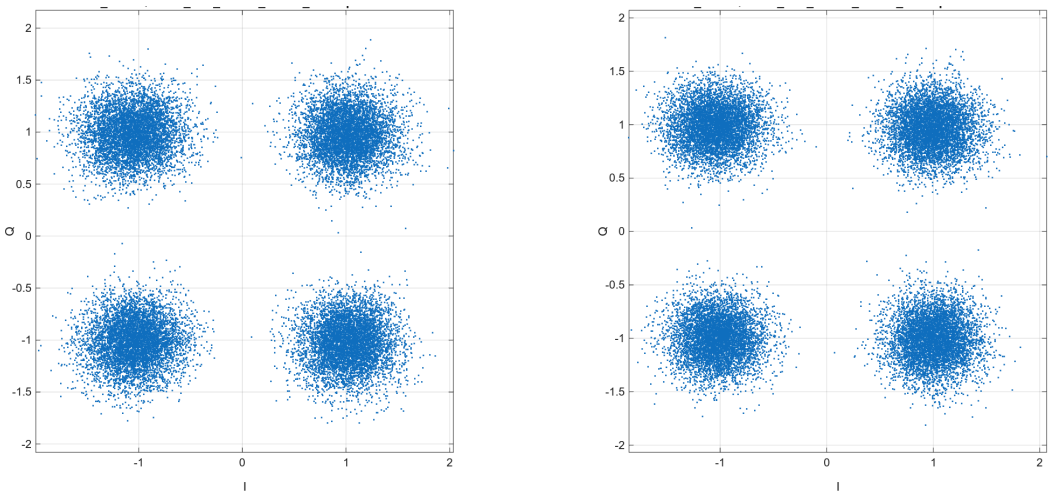

Representative BER: 2.8617e-05 | configuration mean: 2.7759e-05
Accepted / total captures: 10 / 10 | ID: cfg_7a6d502b8776252dffa4

Constellations | configurations 103-104

QPSK | 960 km | 5 dBm | wss offset 12GHz

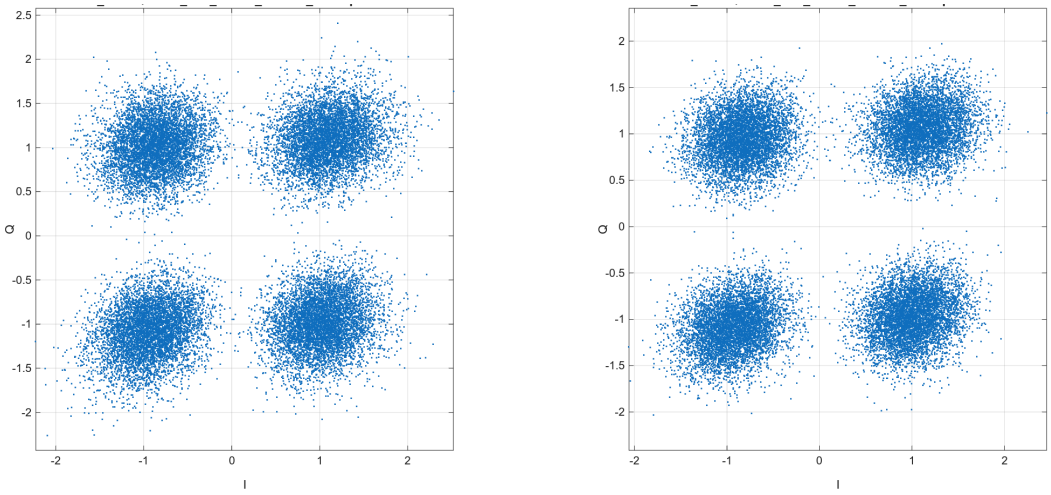

Representative BER: 0.00048077 | configuration mean: 0.00046846
Accepted / total captures: 10 / 10 | ID: cfg_8732aa9824a91717d631

QPSK | 960 km | 5 dBm | wss offset 16GHz

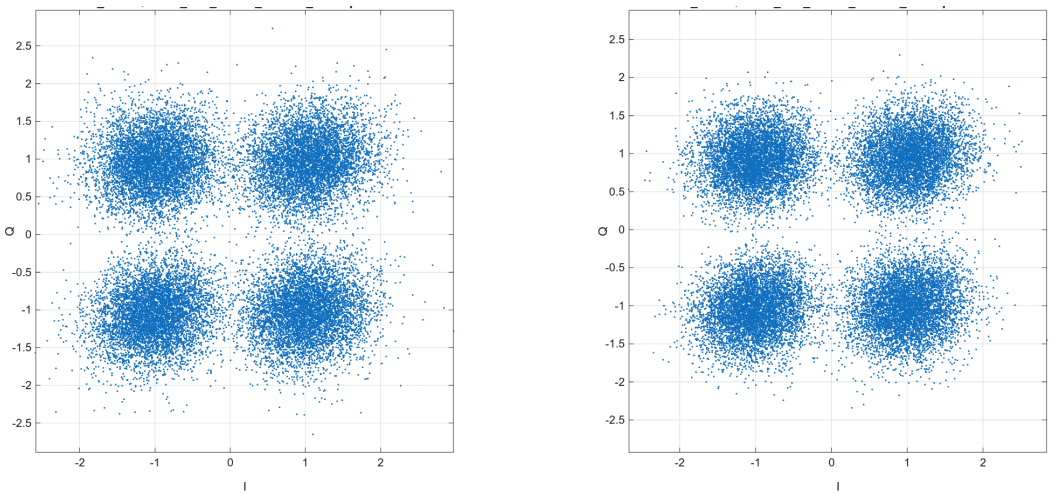

Representative BER: 0.0035342 | configuration mean: 0.003546
Accepted / total captures: 10 / 10 | ID: cfg_523fecd63c2f1e2468ea

Constellations | configurations 105-106

QPSK | 960 km | 5 dBm | wss offset 20GHz

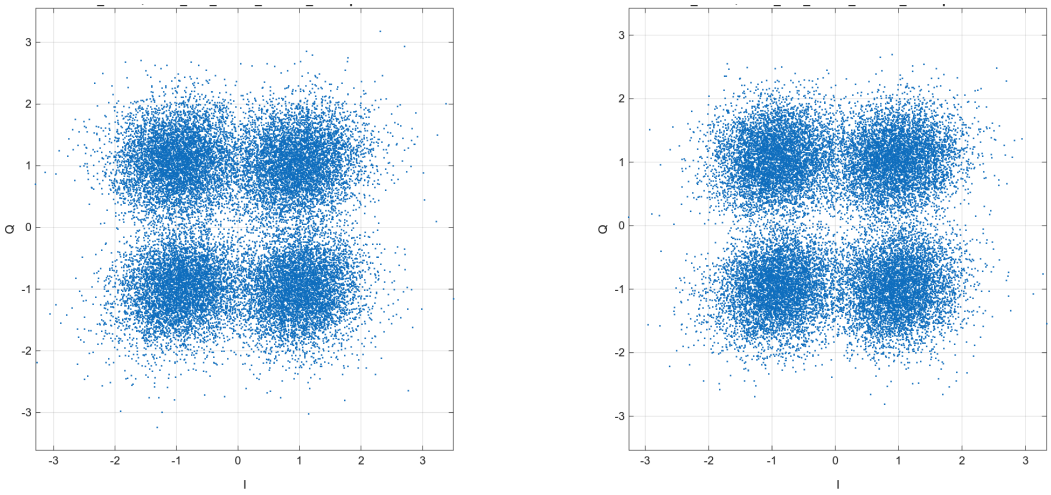

Representative BER: 0.016584 | configuration mean: 0.016538
Accepted / total captures: 10 / 10 | ID: cfg_f79761472ec92bba46ed

QPSK | 960 km | 5 dBm | wss offset 24GHz

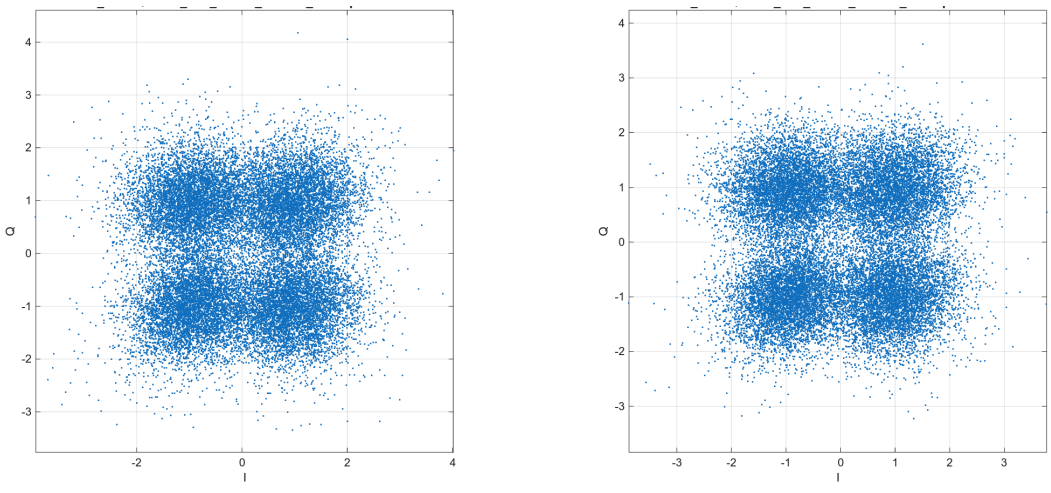

Representative BER: 0.038928 | configuration mean: 0.038397
Accepted / total captures: 10 / 10 | ID: cfg_e4ad5ac1b845a0b57d55

Constellations | configurations 107-108

QPSK | 960 km | 5 dBm | wss bandwidth 55GHz

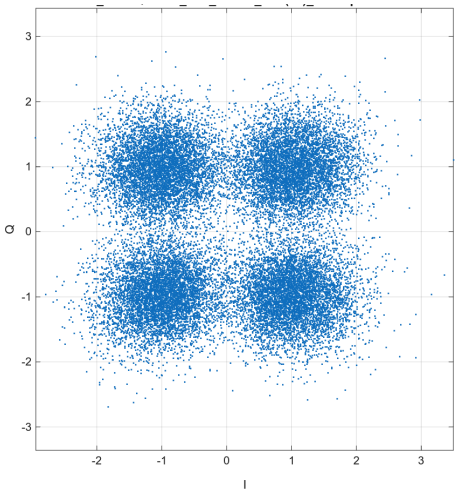

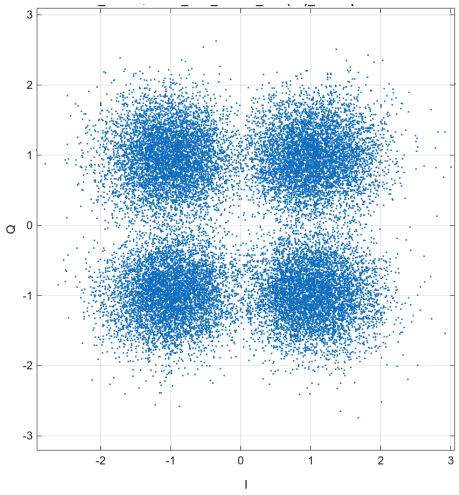

Representative BER: 0.0095009 | configuration mean: 0.0096094
Accepted / total captures: 11 / 11 | ID: cfg_533fc5f9f4a8458df315

QPSK | 960 km | 5 dBm | wss bandwidth 60GHz

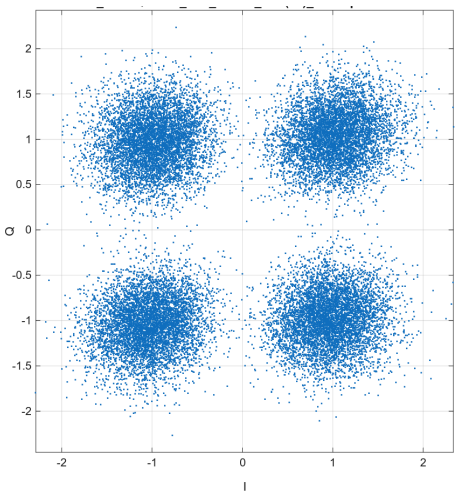

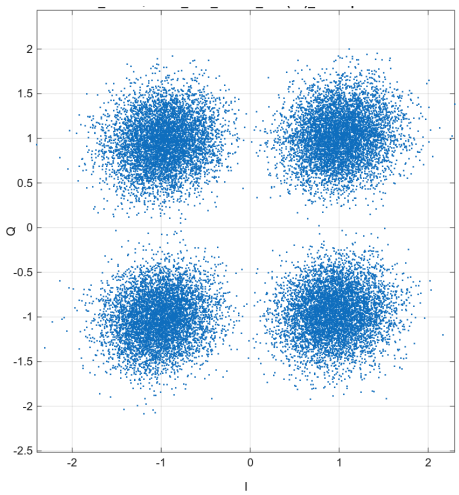

Representative BER: 0.00057234 | configuration mean: 0.00056748
Accepted / total captures: 10 / 10 | ID: cfg_dab218b6549e32ee0ace

Constellations | configurations 109-110

QPSK | 960 km | 5 dBm | wss bandwidth 65GHz

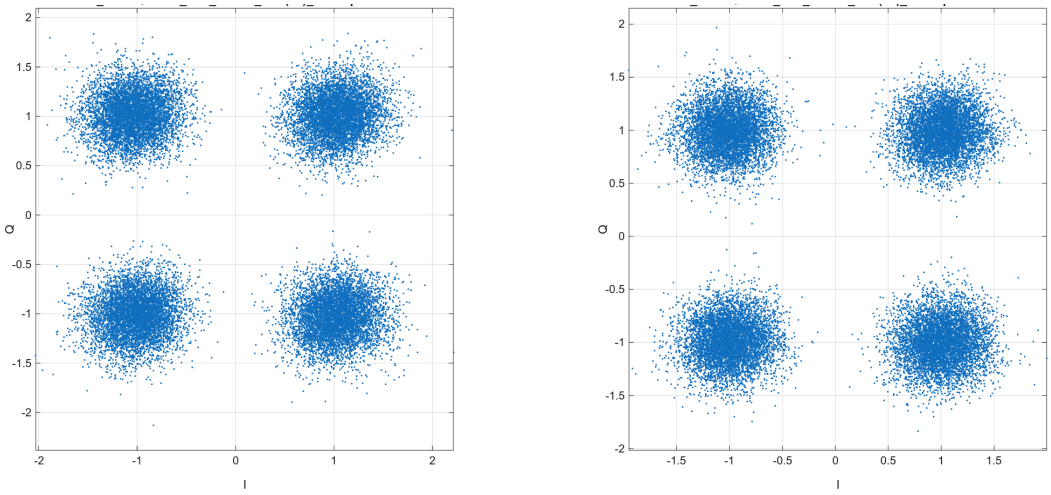

Representative BER: 1.4309e-05 | configuration mean: 1.5739e-05
Accepted / total captures: 10 / 10 | ID: cfg_94474d9ed4e0bb8bbefb

QPSK | 960 km | 5 dBm | wss bandwidth 70GHz

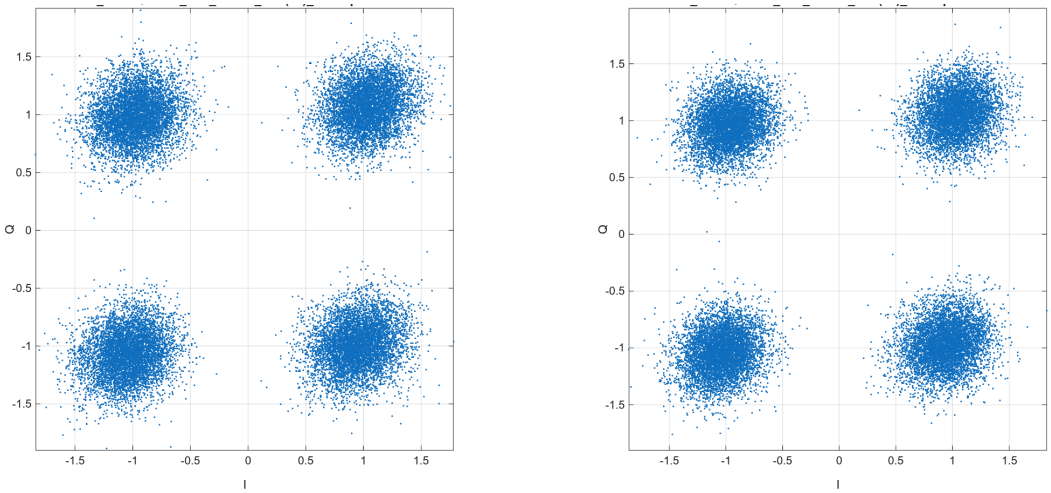

Representative BER: 2.8617e-06 | configuration mean: 2.5755e-06
Accepted / total captures: 10 / 10 | ID: cfg_549b0d581482b906de06

Constellations | configurations 111-112

QPSK | 960 km | 5 dBm | Normal (75 GHz)

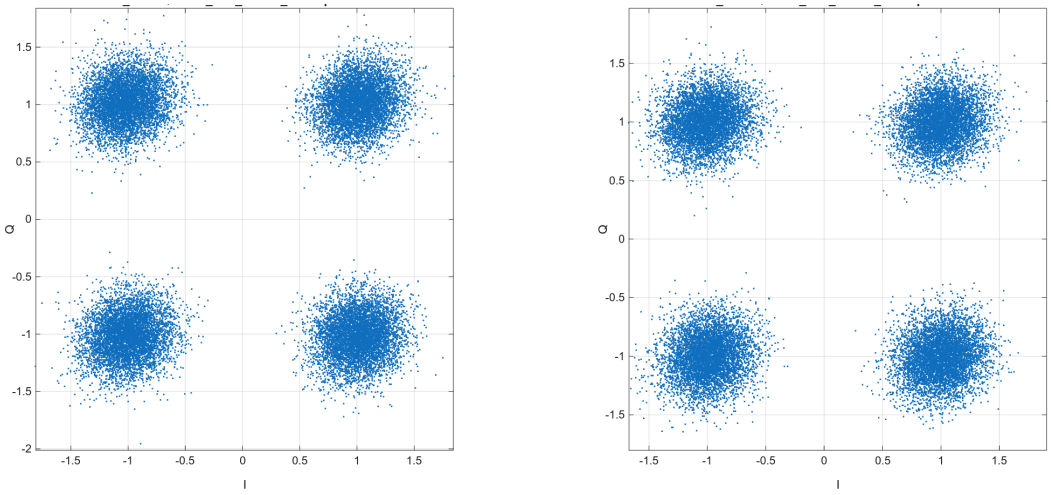

Representative BER: 2.8617e-06 | configuration mean: 2.5315e-06
Accepted / total captures: 26 / 26 | ID: cfg_56e2d6e82b07e309dd8b

QPSK | 1280 km | 1 dBm | attenuation 3dB

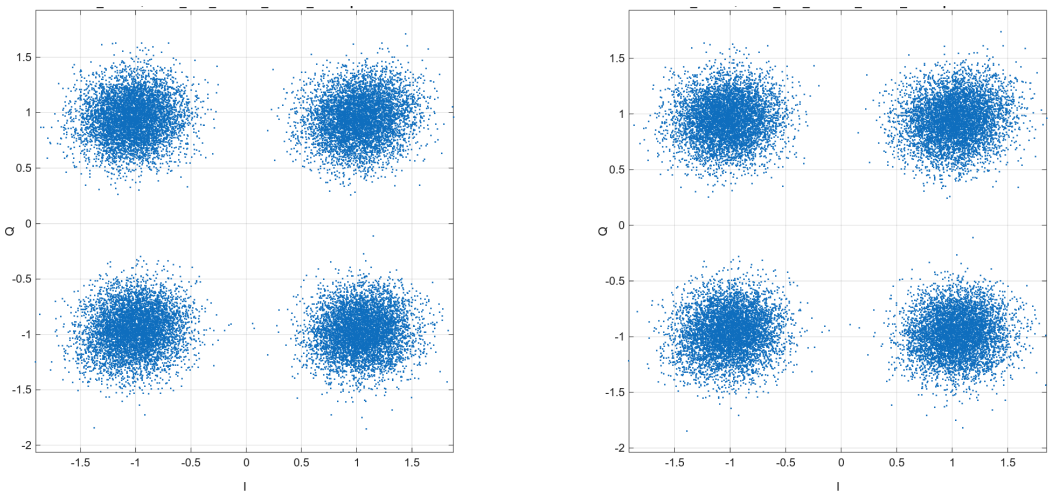

Representative BER: 2.8617e-06 | configuration mean: 2.0032e-06
Accepted / total captures: 10 / 11 | ID: cfg_ea761864f5d3edaa13b8

Constellations | configurations 113-114

QPSK | 1280 km | 1 dBm | attenuation 5dB

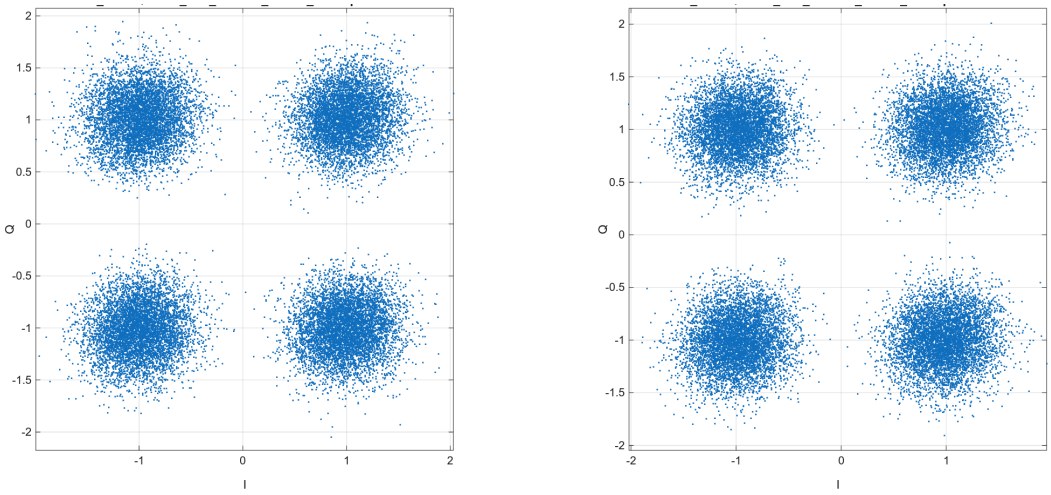

Representative BER: 5.1511e-05 | configuration mean: 4.636e-05
Accepted / total captures: 5 / 11 | ID: cfg_d84fe56168ade2795f14

QPSK | 1280 km | 1 dBm | edfa 1dB

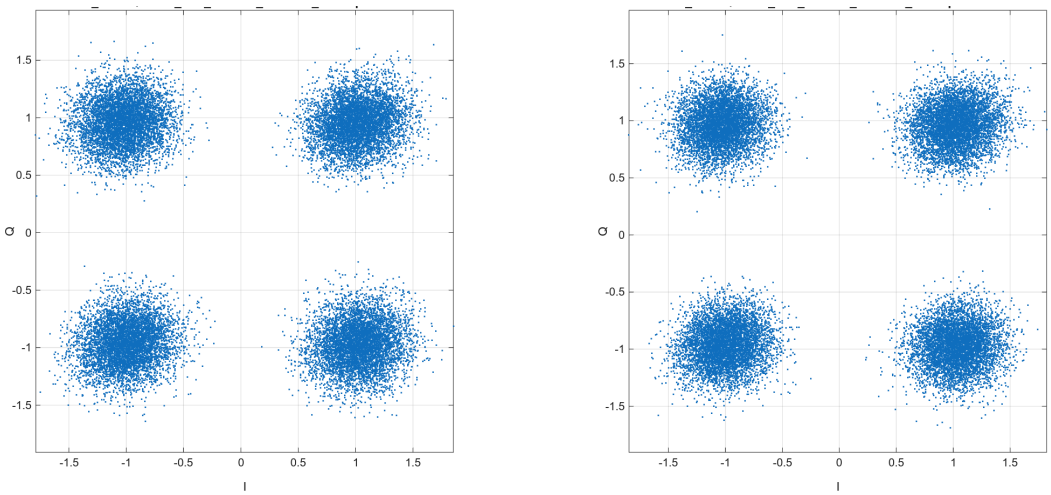

Representative BER: 0 | configuration mean: 0
Accepted / total captures: 5 / 10 | ID: cfg_1dcaf553dddbb5ac0542

Constellations | configurations 115-116

QPSK | 1280 km | 1 dBm | edfa 3dB

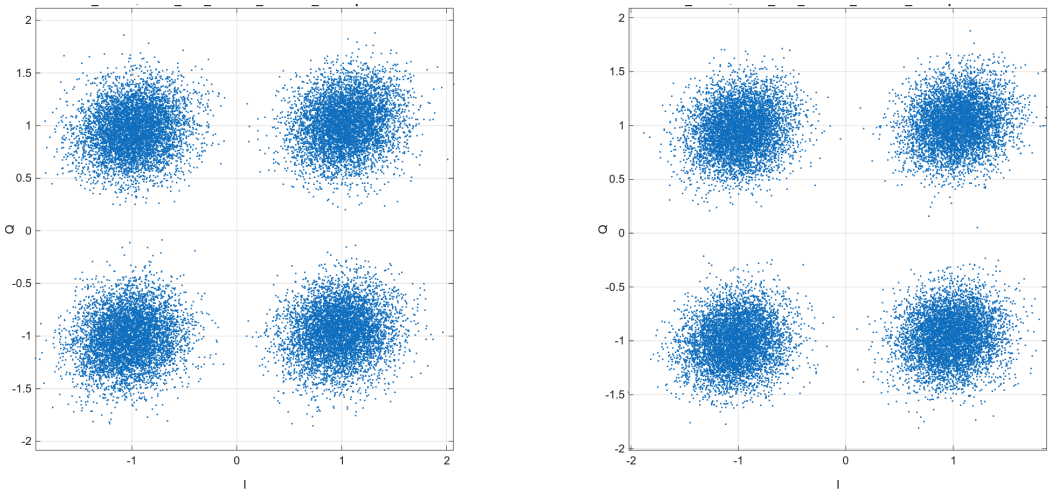

Representative BER: 2.8617e-05 | configuration mean: 2.8903e-05
Accepted / total captures: 10 / 11 | ID: cfg_afb3ccf472bc9ca02515

QPSK | 1280 km | 1 dBm | edfa 5dB

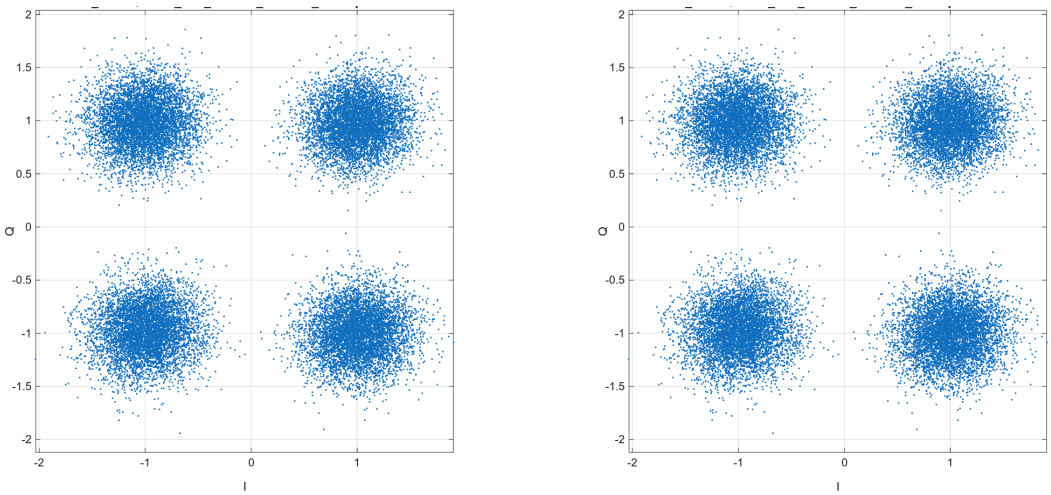

Representative BER: 1.717e-05 | configuration mean: 1.4309e-05
Accepted / total captures: 4 / 10 | ID: cfg_b6185da2d185d98943d3

Constellations | configurations 117-118

QPSK | 1280 km | 1 dBm | edfa 9dB

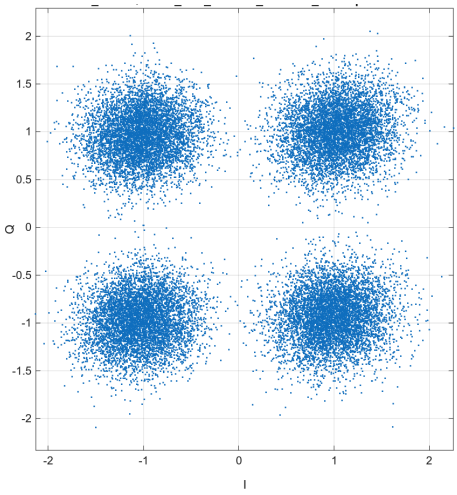

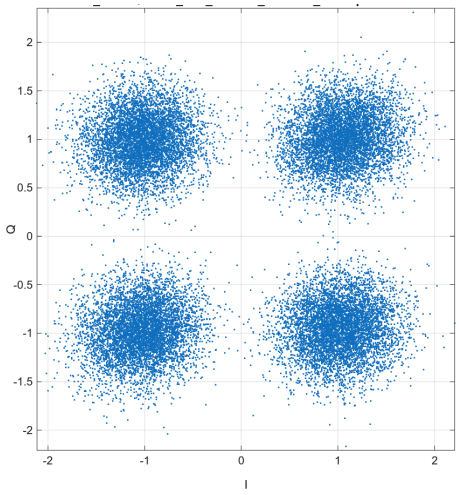

Representative BER: 0.00028617 | configuration mean: 0.00026757
Accepted / total captures: 8 / 11 | ID: cfg_278e00407c72f1369d34

QPSK | 1280 km | 1 dBm | Normal

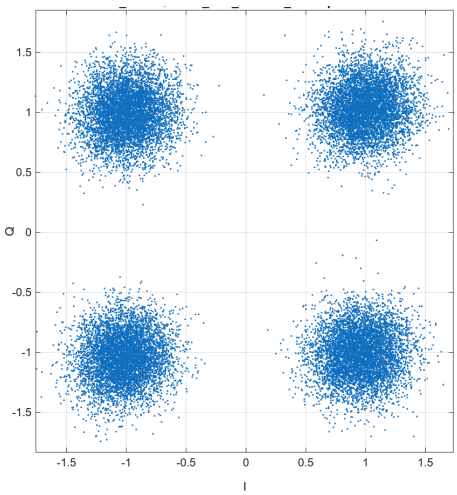

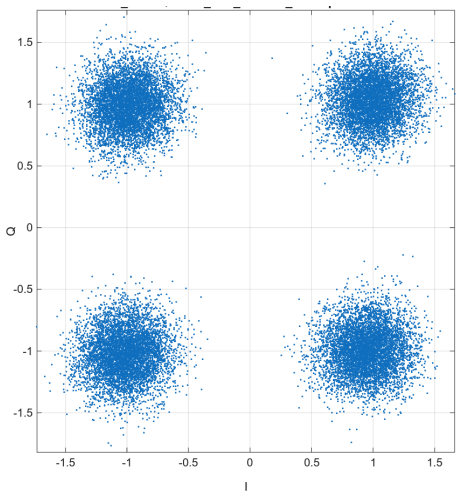

Representative BER: 0 | configuration mean: 7.1543e-07
Accepted / total captures: 16 / 16 | ID: cfg_61823871f2ec7520ed58

Constellations | configurations 119-120

QPSK | 1280 km | 3 dBm | attenuation 3dB

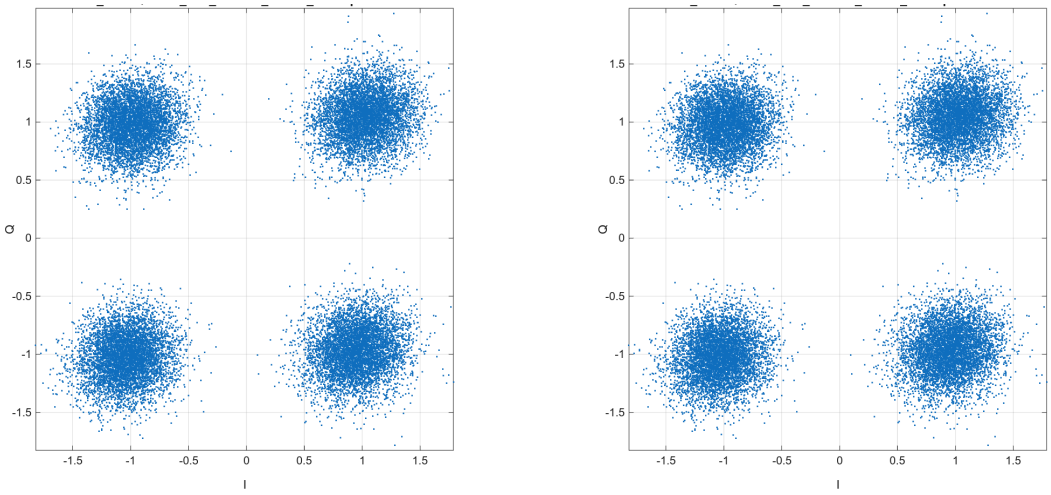

Representative BER: 5.7234e-06 | configuration mean: 4.5788e-06
Accepted / total captures: 5 / 10 | ID: cfg_cb8f60f9c622235565ed

QPSK | 1280 km | 3 dBm | attenuation 5dB

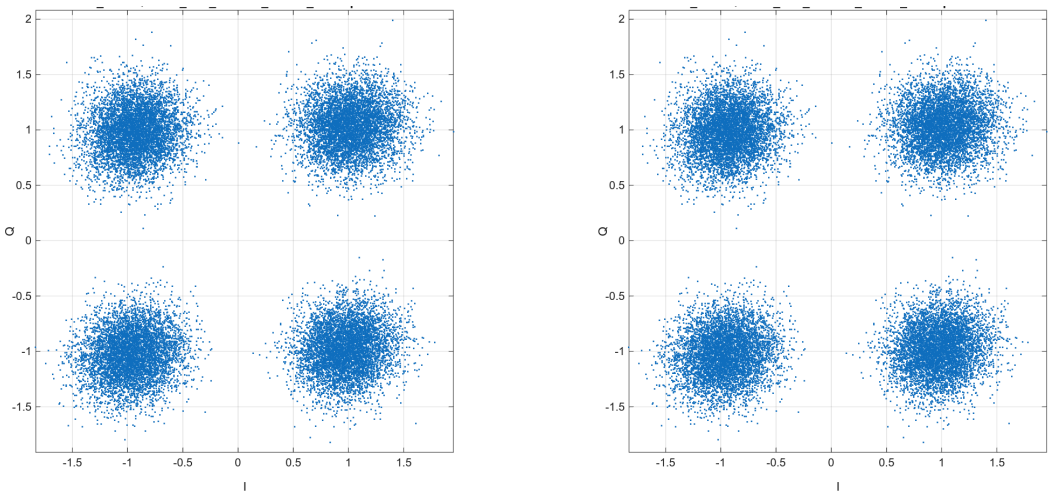

Representative BER: 5.7234e-06 | configuration mean: 7.4405e-06
Accepted / total captures: 5 / 10 | ID: cfg_8b494d03f85d4a4248bd

Constellations | configurations 121-122

QPSK | 1280 km | 3 dBm | edfa 1dB

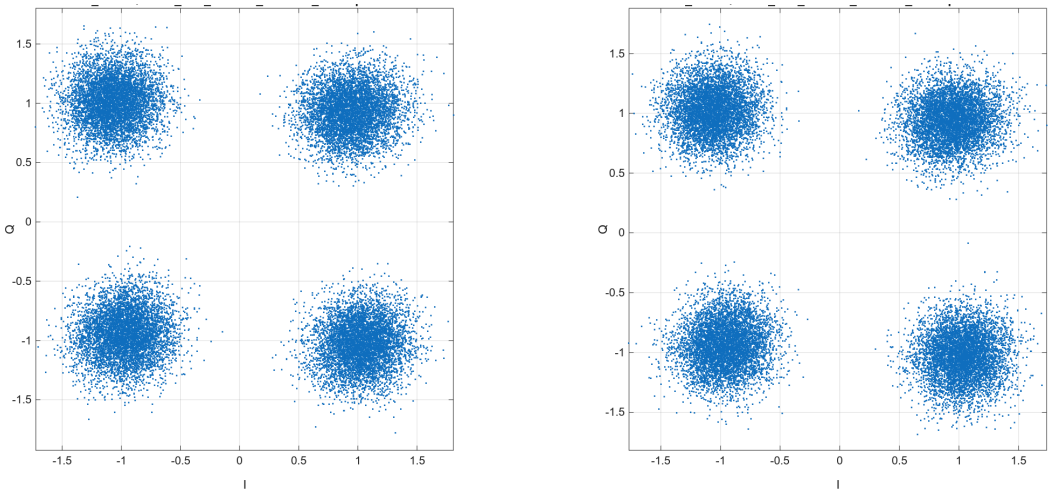

Representative BER: 0 | configuration mean: 5.7234e-07
Accepted / total captures: 10 / 10 | ID: cfg_94b47532f700f728992a

QPSK | 1280 km | 3 dBm | edfa 3dB

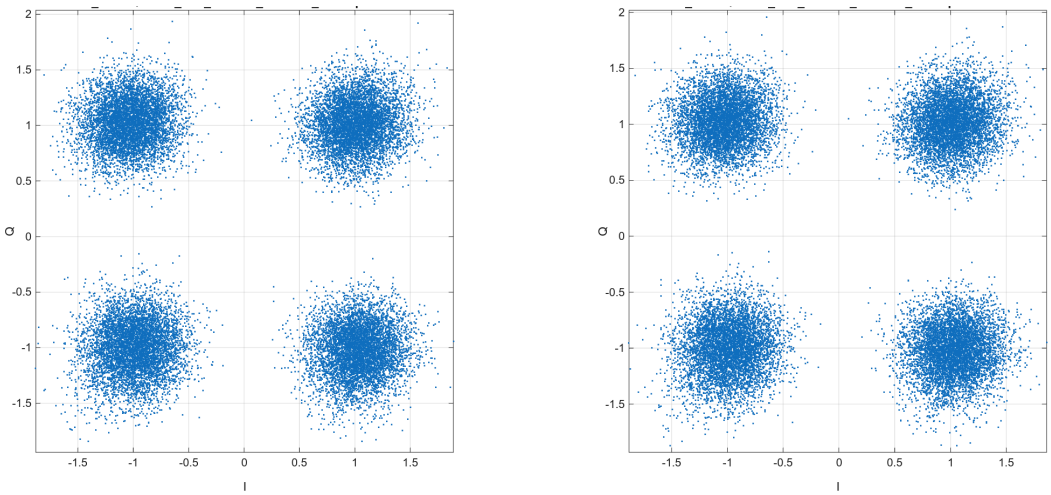

Representative BER: 0 | configuration mean: 6.3594e-07
Accepted / total captures: 9 / 10 | ID: cfg_215ffe2d35cc85568a65

Constellations | configurations 123-124

QPSK | 1280 km | 3 dBm | edfa 5dB

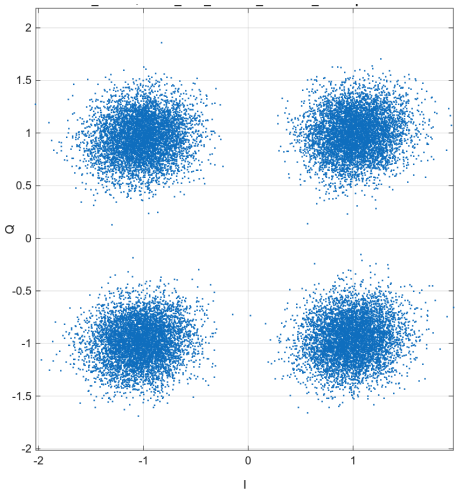

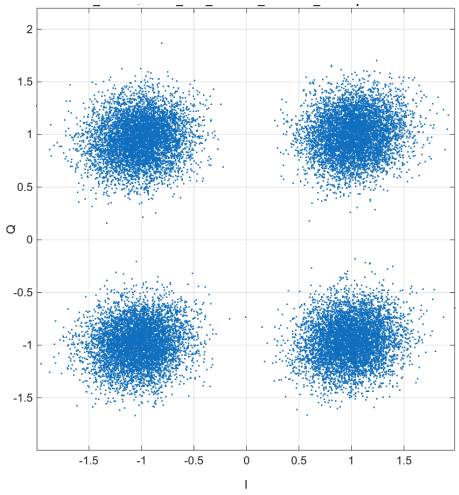

Representative BER: 2.8617e-06 | configuration mean: 4.1336e-06
Accepted / total captures: 9 / 10 | ID: cfg_a827296b72081def5fc0

QPSK | 1280 km | 3 dBm | edfa 9dB

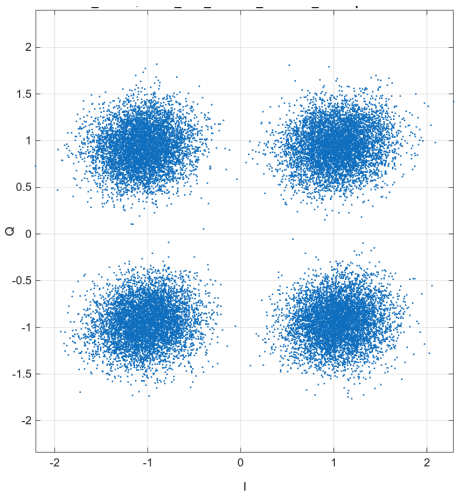

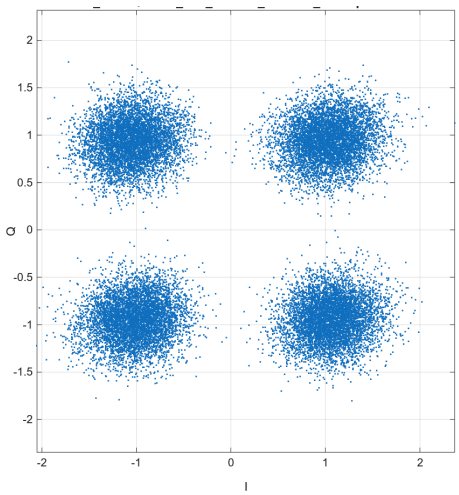

Representative BER: 6.582e-05 | configuration mean: 6.0955e-05
Accepted / total captures: 10 / 10 | ID: cfg_41e285967d2e3e1f4cfc

Constellations | configurations 125-126

QPSK | 1280 km | 3 dBm | Normal

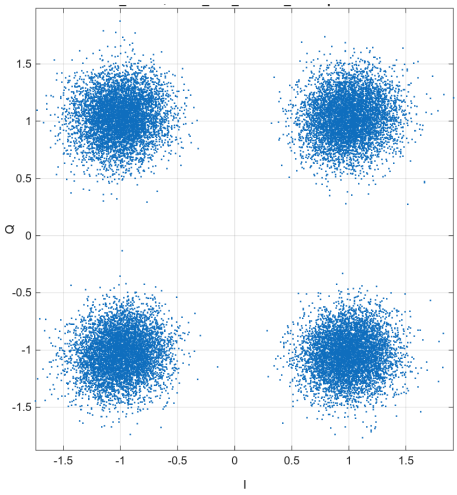

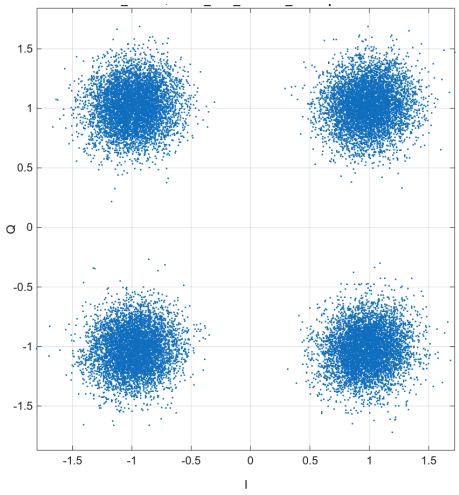

Representative BER: 0 | configuration mean: 3.5772e-07
Accepted / total captures: 16 / 16 | ID: cfg_4a8e5ea53711d7a538ad

QPSK | 1280 km | 5 dBm | Normal

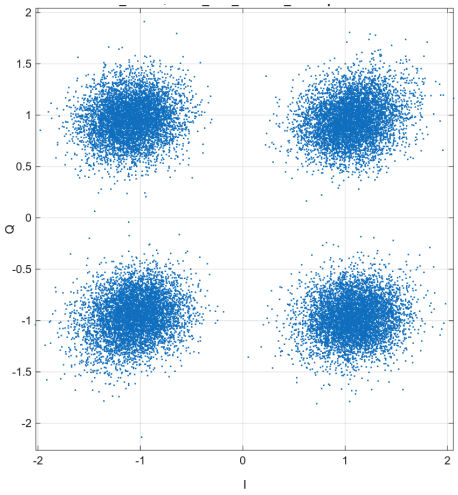

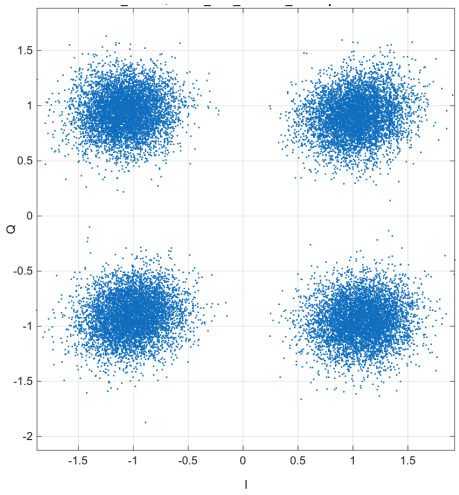

Representative BER: 1.1447e-05 | configuration mean: 1.0374e-05
Accepted / total captures: 16 / 16 | ID: cfg_b4ccd9ff120d9ca07501

Constellations | configurations 127-128

QPSK | 1600 km | 1 dBm | Normal

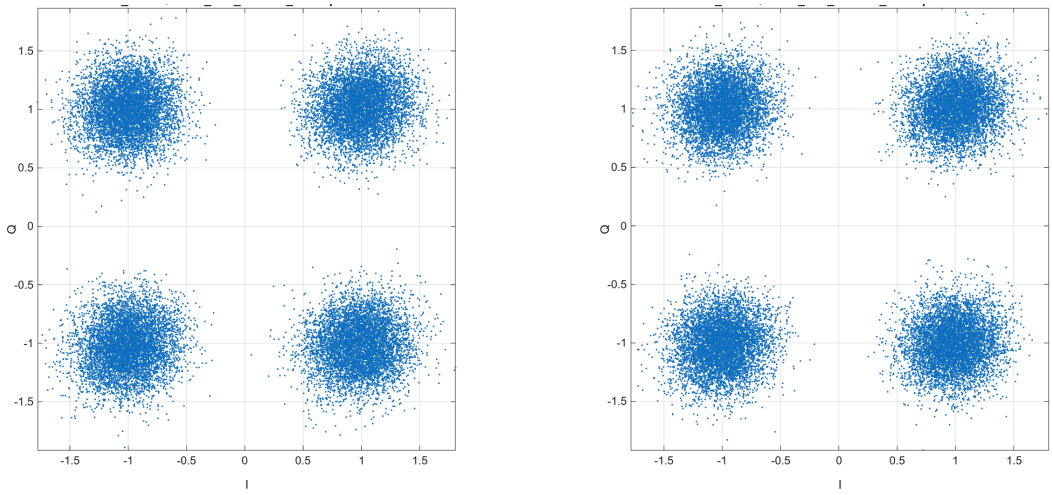

Representative BER: 2.8617e-06 | configuration mean: 2.6416e-06
Accepted / total captures: 13 / 16 | ID: cfg_9d6f484791300cbef94f

QPSK | 1600 km | 3 dBm | Normal

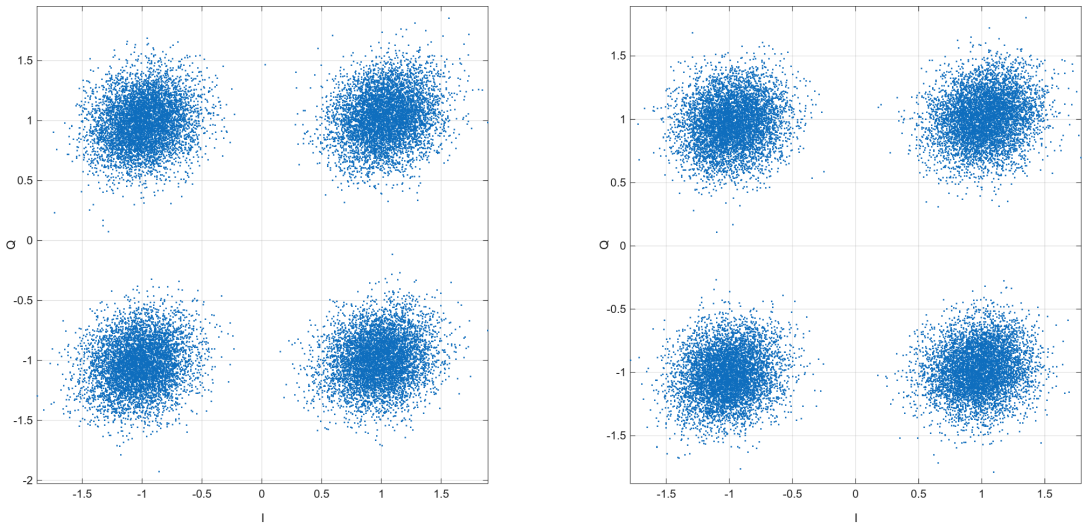

Representative BER: 2.8617e-06 | configuration mean: 3.302e-06
Accepted / total captures: 13 / 16 | ID: cfg_fb1024147c0d6500c04d

Constellations | configurations 129-130

QPSK | 1600 km | 5 dBm | Normal

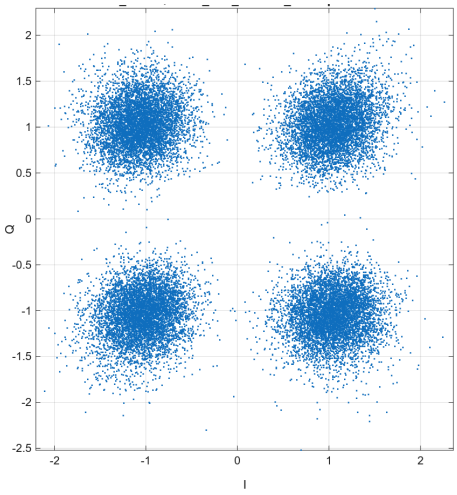

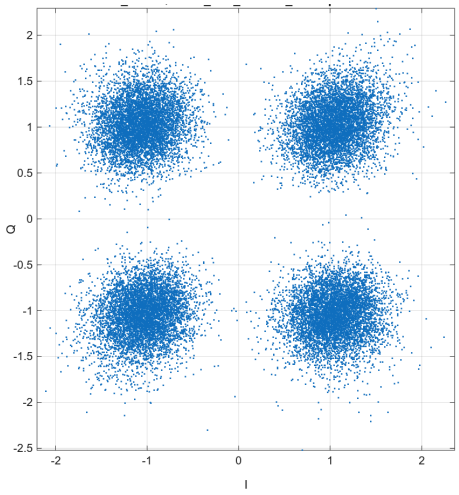

Representative BER: 6.8681e-05 | configuration mean: 6.5104e-05
Accepted / total captures: 8 / 16 | ID: cfg_16edfefd9a9e8b20daec

QPSK | 1920 km | 1 dBm | Normal

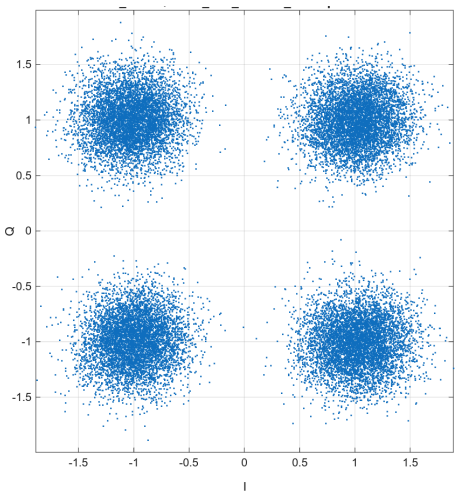

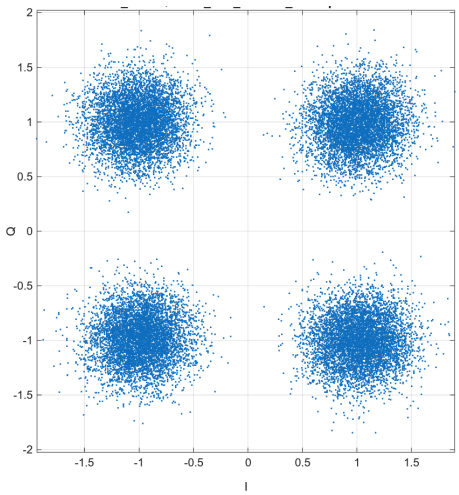

Representative BER: 8.5852e-06 | configuration mean: 8.5852e-06
Accepted / total captures: 9 / 16 | ID: cfg_eb36c94b85939914b733

Constellations | configurations 131-132

QPSK | 1920 km | 3 dBm | Normal

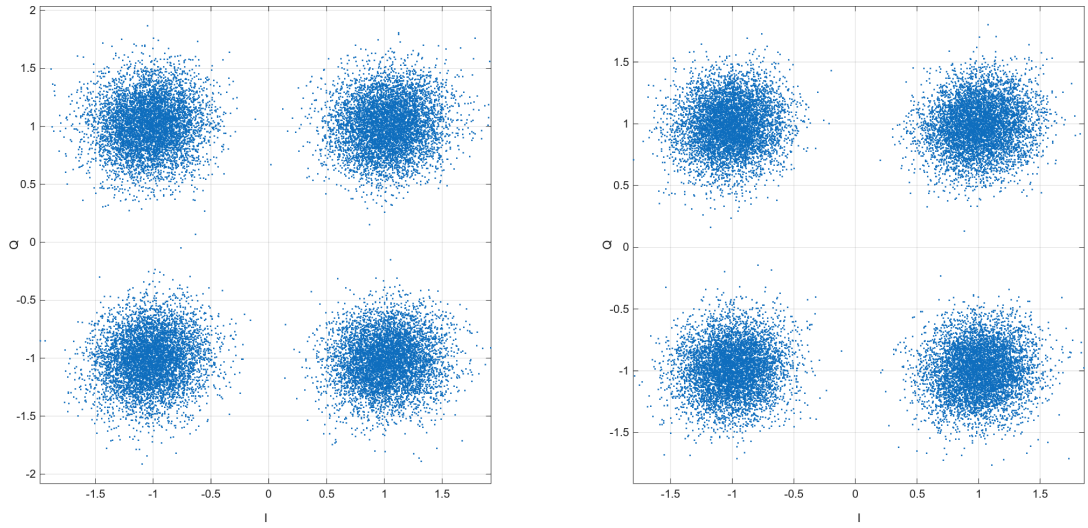

Representative BER: 1.1447e-05 | configuration mean: 1.1626e-05
Accepted / total captures: 16 / 16 | ID: cfg_23336ebbce696b0f99c0

QPSK | 1920 km | 5 dBm | Normal

No accepted representative constellation

Representative BER: NA | configuration mean: NA
Accepted / total captures: 0 / 16 | ID: cfg_533871d72e40de249108

Constellations | configurations 133-134

QPSK | 2240 km | 1 dBm | Normal

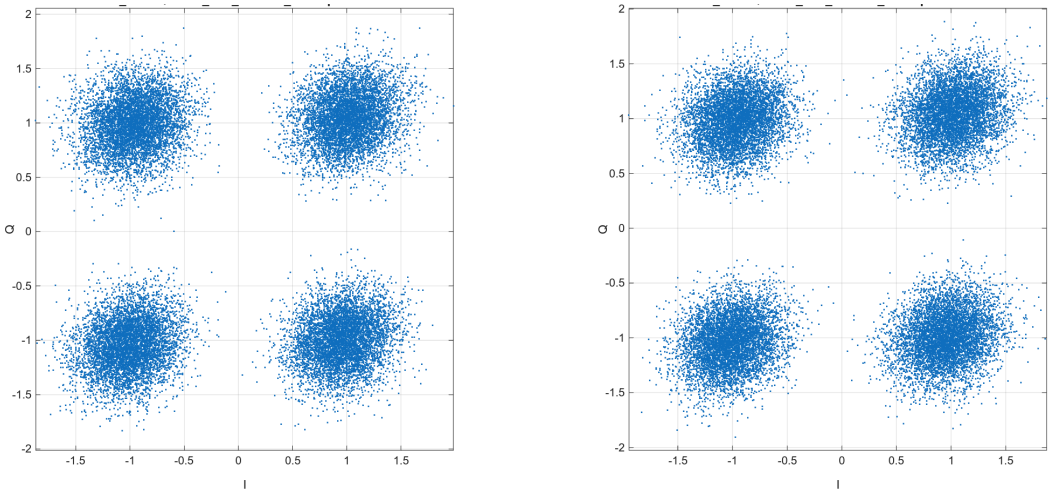

Representative BER: 2.2894e-05 | configuration mean: 2.4455e-05
Accepted / total captures: 11 / 16 | ID: cfg_abc0bcab611bfb5f738d

QPSK | 2240 km | 3 dBm | Normal

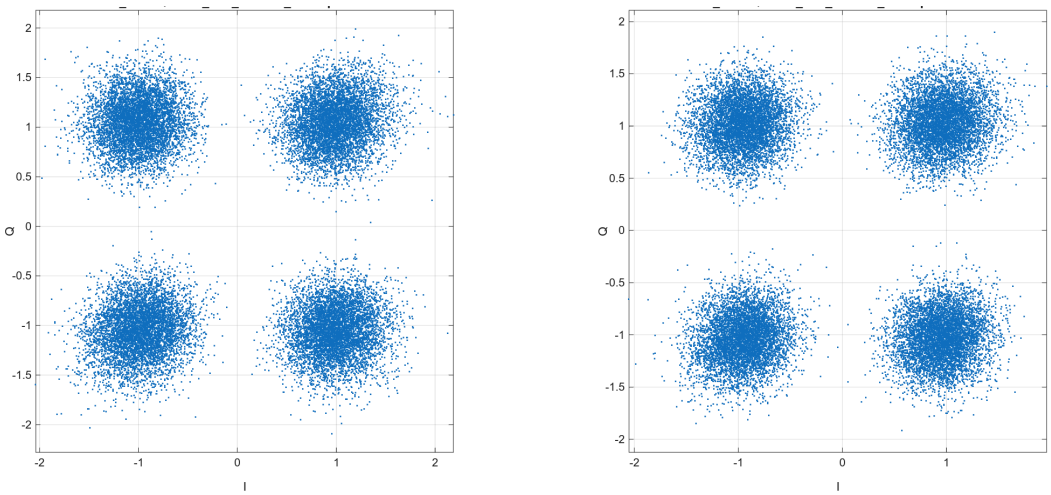

Representative BER: 3.7202e-05 | configuration mean: 3.7739e-05
Accepted / total captures: 16 / 16 | ID: cfg_b1d2bdd3bd94697424f1

Constellations | configurations 135-136

QPSK | 2240 km | 5 dBm | Normal

No accepted representative constellation

Representative BER: NA | configuration mean: NA
Accepted / total captures: 0 / 16 | ID: cfg_f63d24345cba00179052

16QAM | 320 km | 1 dBm | attenuation 3dB

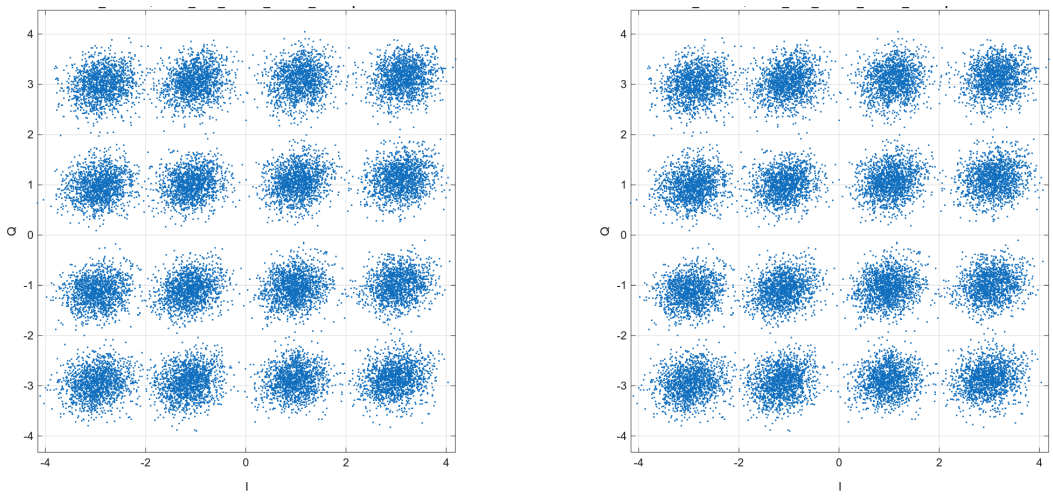

Representative BER: 0.0012592 | configuration mean: 0.0012601
Accepted / total captures: 11 / 11 | ID: cfg_b477f3aeb072a2fdd587

Constellations | configurations 137-138

16QAM | 320 km | 1 dBm | attenuation 5dB

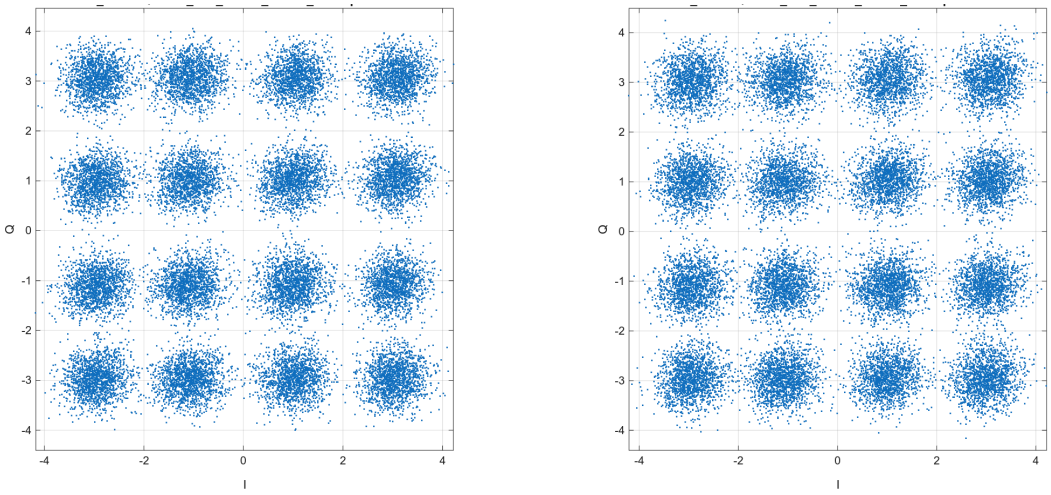

Representative BER: 0.0015539 | configuration mean: 0.0018412
Accepted / total captures: 9 / 10 | ID: cfg_e5e23c4d59c29049f50d

16QAM | 320 km | 1 dBm | edfa 1dB

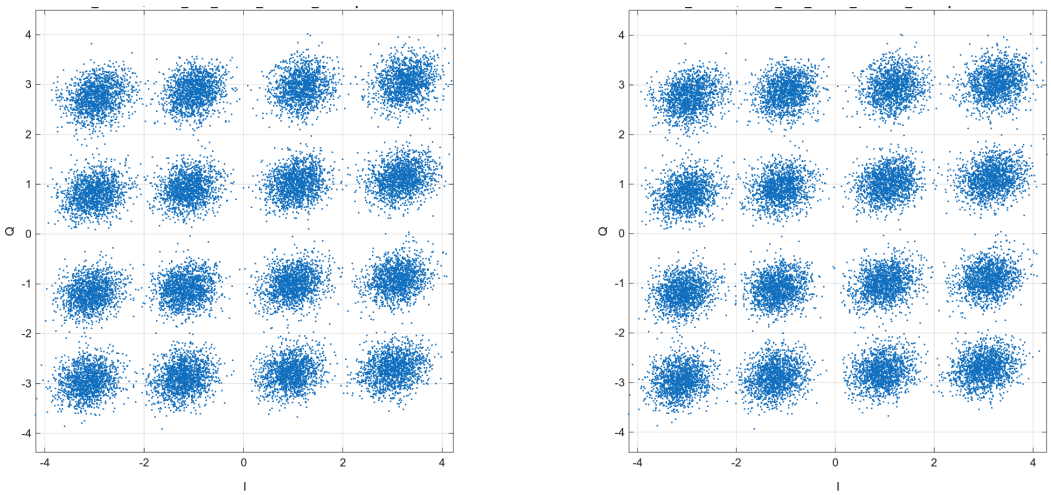

Representative BER: 0.00088856 | configuration mean: 0.00091189
Accepted / total captures: 10 / 10 | ID: cfg_2dfc2b82d643e34ad38e

Constellations | configurations 139-140

16QAM | 320 km | 1 dBm | edfa 3dB

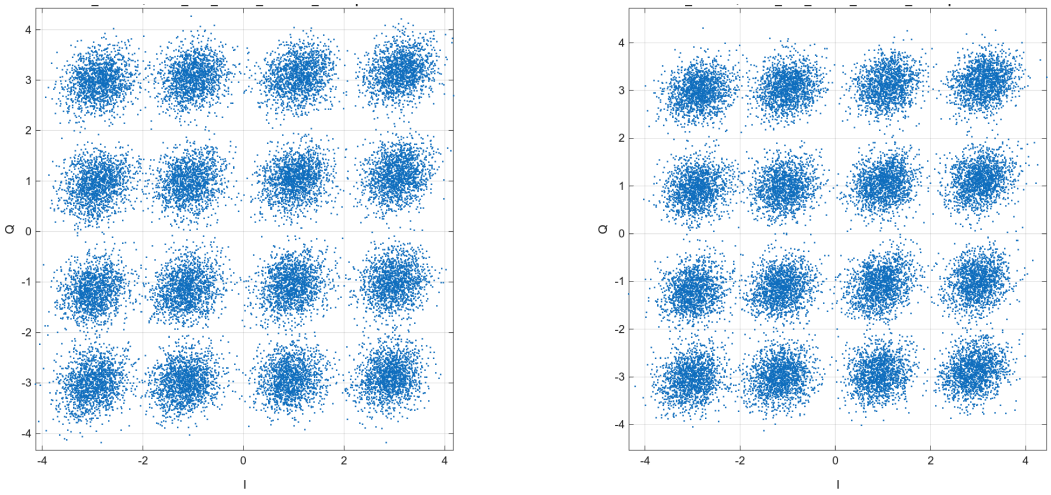

Representative BER: 0.0016884 | configuration mean: 0.0017741
Accepted / total captures: 9 / 10 | ID: cfg_b9bfbca7e394a2e14b01

16QAM | 320 km | 1 dBm | edfa 5dB

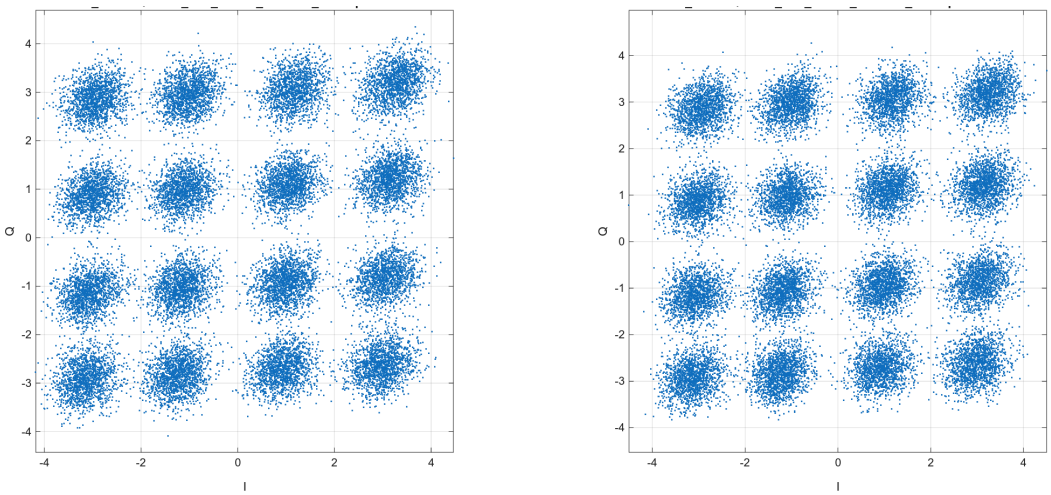

Representative BER: 0.0023638 | configuration mean: 0.002415
Accepted / total captures: 9 / 10 | ID: cfg_96af781a26a50cf1cbcb

Constellations | configurations 141-142

16QAM | 320 km | 1 dBm | edfa 9dB

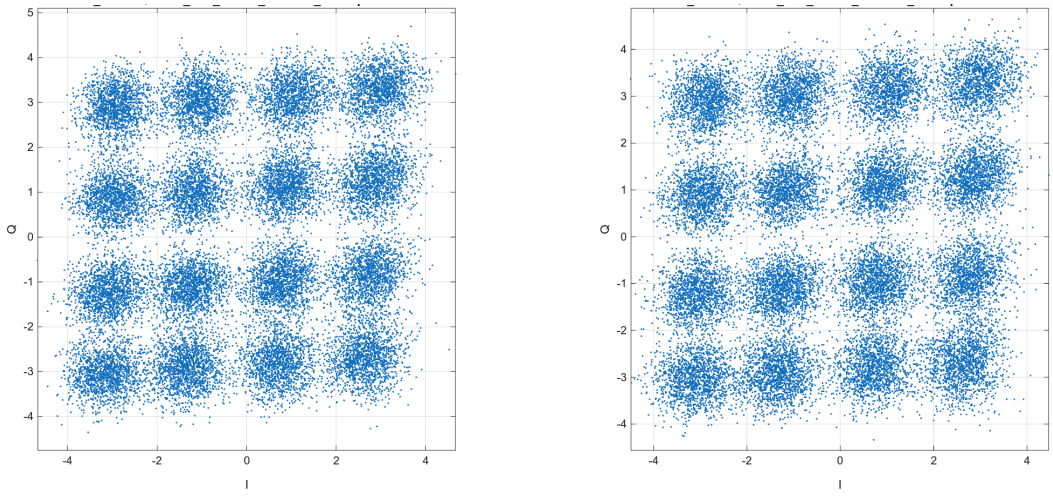

Representative BER: 0.0091418 | configuration mean: 0.0087248
Accepted / total captures: 9 / 10 | ID: cfg_f1d3509e2bfae26010cb

16QAM | 320 km | 1 dBm | Normal

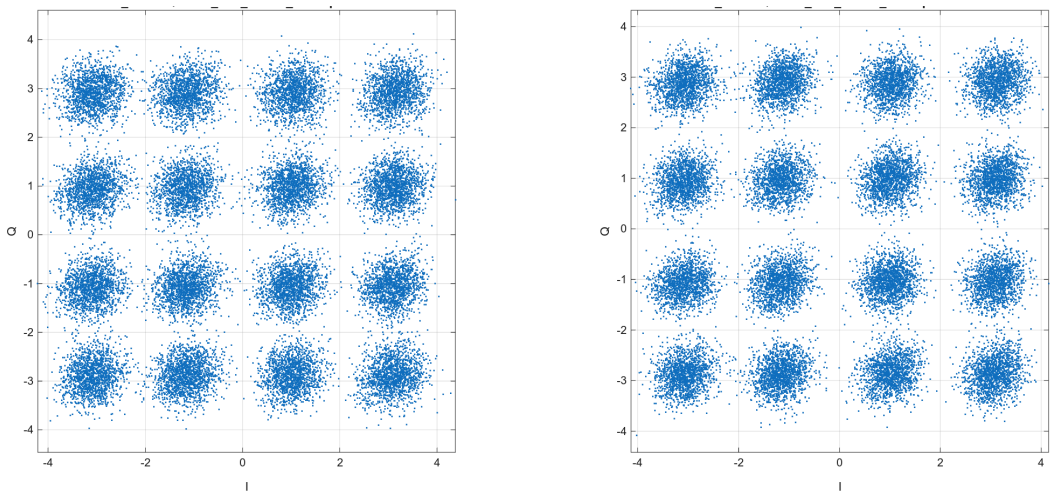

Representative BER: 0.0013393 | configuration mean: 0.0013339
Accepted / total captures: 17 / 17 | ID: cfg_21def81a5bb03a1f0a37

Constellations | configurations 143-144

16QAM | 320 km | 3 dBm | attenuation 3dB

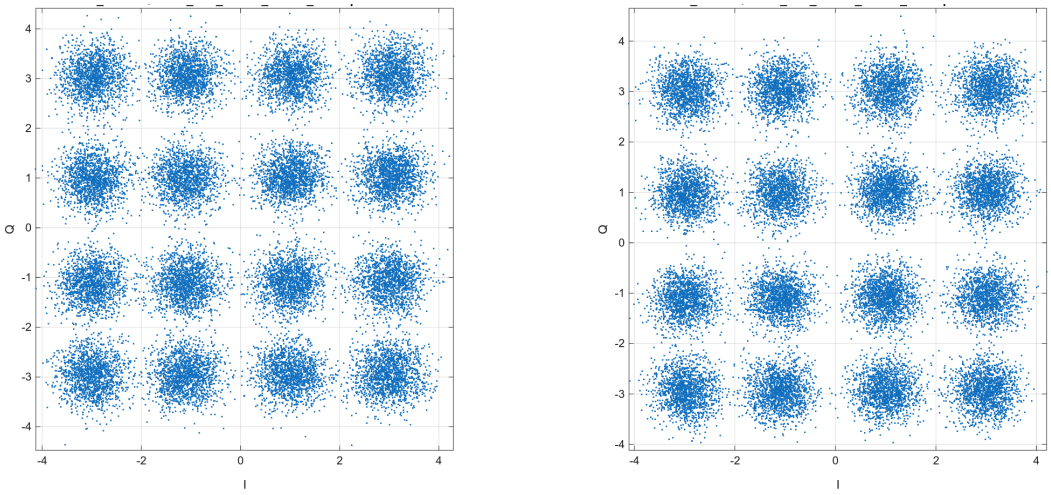

Representative BER: 0.0014366 | configuration mean: 0.0015076
Accepted / total captures: 10 / 10 | ID: cfg_db89195a76521f8c876a

16QAM | 320 km | 3 dBm | attenuation 5dB

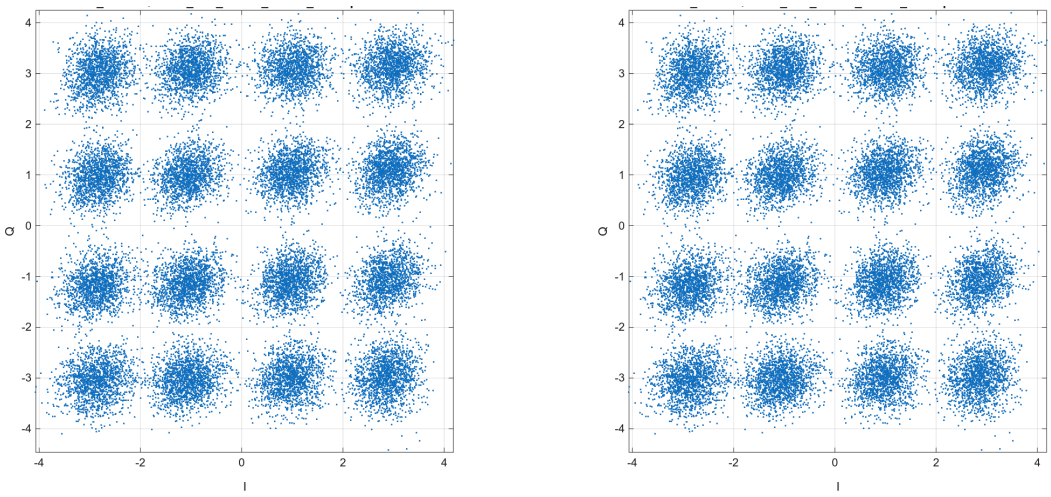

Representative BER: 0.0020003 | configuration mean: 0.0016249
Accepted / total captures: 10 / 10 | ID: cfg_764d6b5d24b8c2910ddb

Constellations | configurations 145-146

16QAM | 320 km | 3 dBm | edfa 1dB

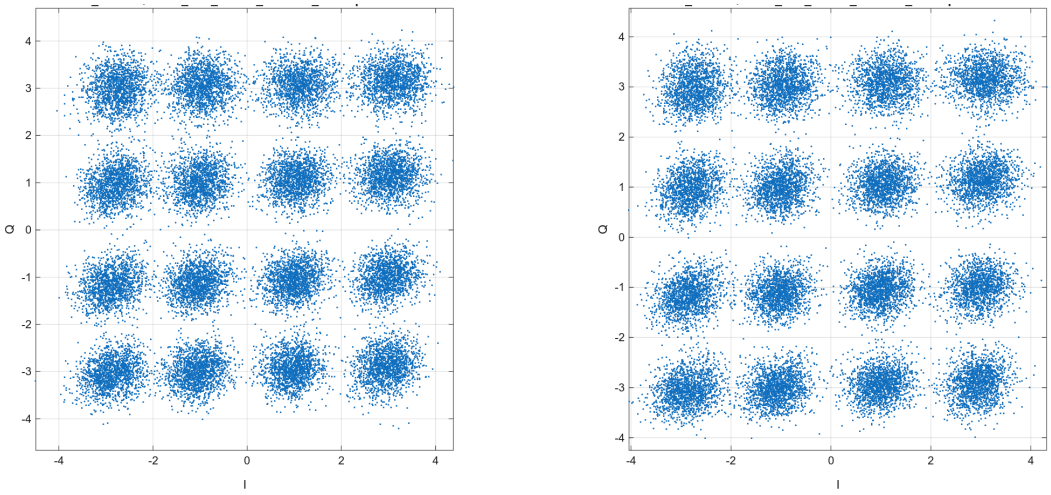

Representative BER: 0.0018186 | configuration mean: 0.0018678
Accepted / total captures: 9 / 10 | ID: cfg_0a08fc5c9e91b6b22624

16QAM | 320 km | 3 dBm | edfa 3dB

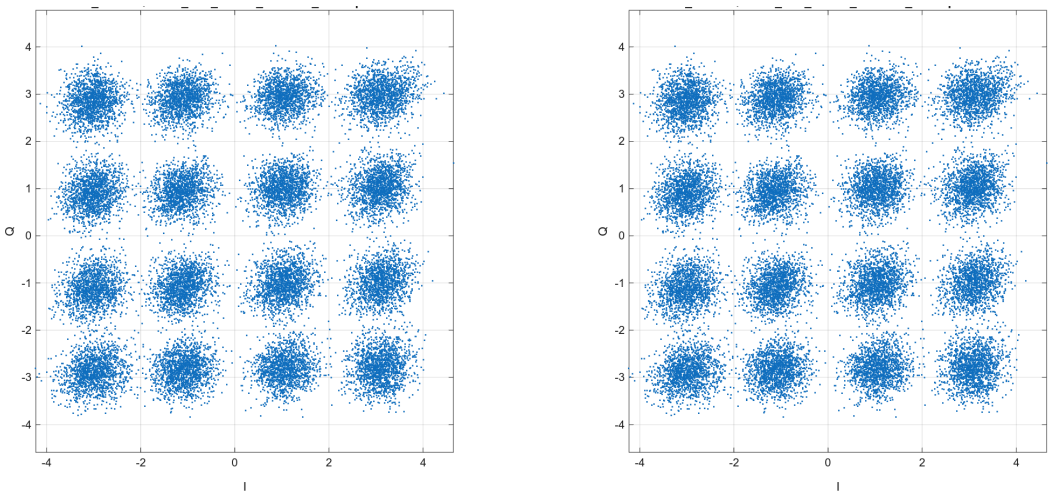

Representative BER: 0.0012763 | configuration mean: 0.0012152
Accepted / total captures: 7 / 10 | ID: cfg_4d91f14b421a0510bc53

Constellations | configurations 147-148

16QAM | 320 km | 3 dBm | edfa 5dB

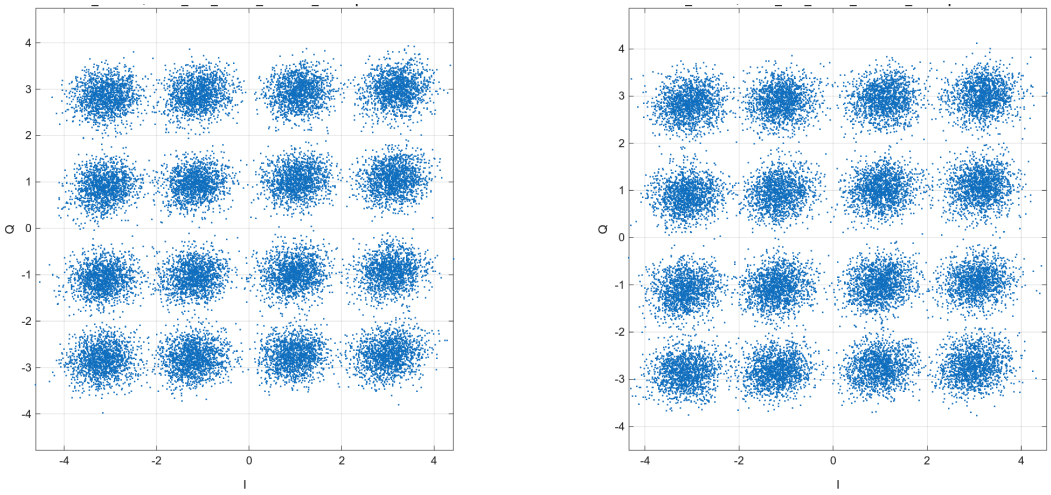

Representative BER: 0.0019045 | configuration mean: 0.0018078
Accepted / total captures: 7 / 10 | ID: cfg_223c059f47f139ad03c8

16QAM | 320 km | 3 dBm | edfa 9dB

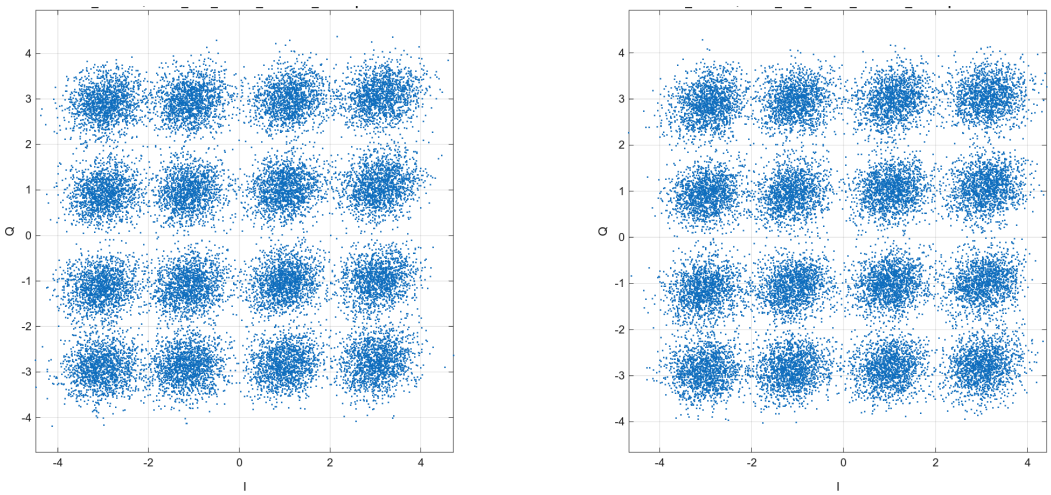

Representative BER: 0.0042482 | configuration mean: 0.0044119
Accepted / total captures: 10 / 10 | ID: cfg_e49a3cb27e2b8f61aaad

Constellations | configurations 149-150

16QAM | 320 km | 3 dBm | Normal

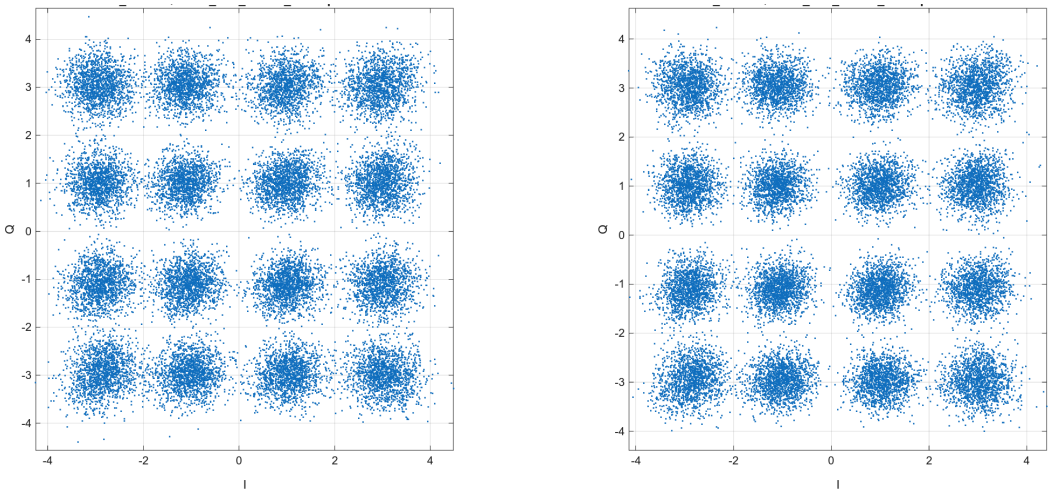

Representative BER: 0.0014738 | configuration mean: 0.0014735
Accepted / total captures: 11 / 16 | ID: cfg_fd4fd5831c6377c26fbd

16QAM | 320 km | 5 dBm | attenuation 3dB

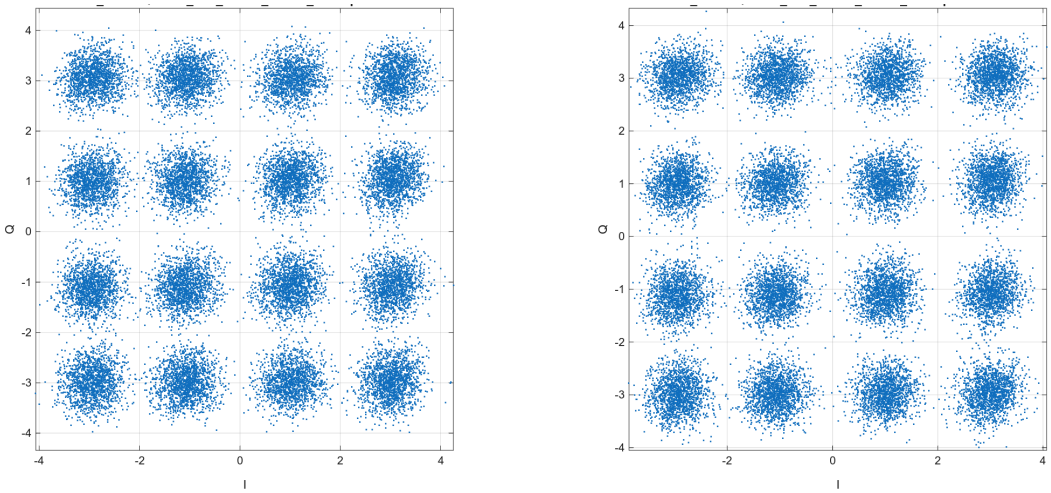

Representative BER: 0.0009043 | configuration mean: 0.0010585
Accepted / total captures: 4 / 10 | ID: cfg_9fbef6404df70a68bd00

Constellations | configurations 151-152

16QAM | 320 km | 5 dBm | attenuation 5dB

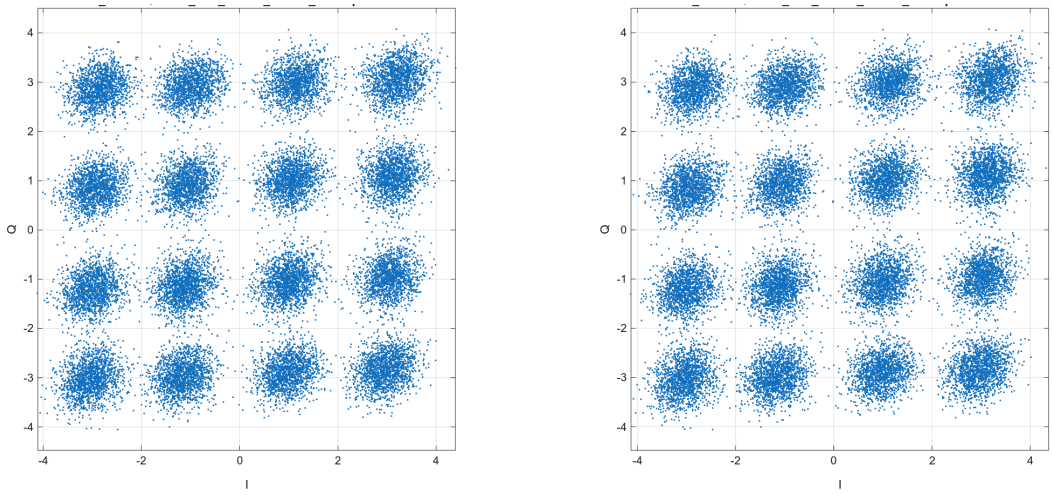

Representative BER: 0.0011948 | configuration mean: 0.0011278
Accepted / total captures: 10 / 11 | ID: cfg_9132f579073981c2b8c1

16QAM | 320 km | 5 dBm | edfa 1dB

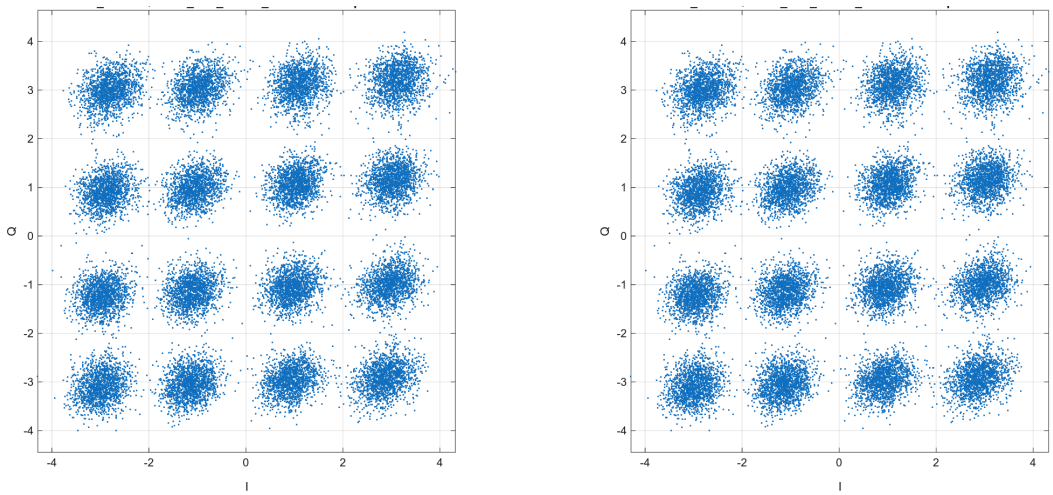

Representative BER: 0.001139 | configuration mean: 0.0010176
Accepted / total captures: 11 / 11 | ID: cfg_10a5b0654b8c99074637

Constellations | configurations 153-154

16QAM | 320 km | 5 dBm | edfa 3dB

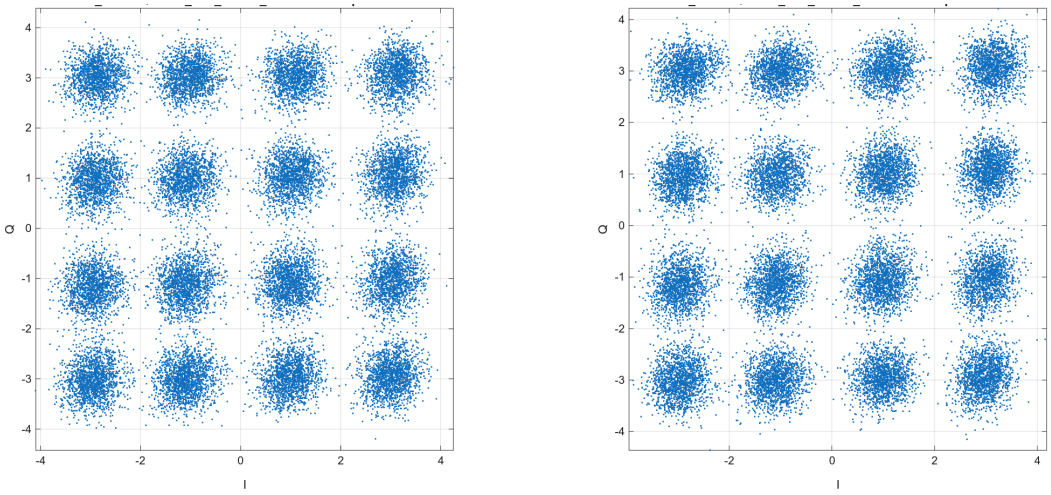

Representative BER: 0.0010889 | configuration mean: 0.0010105
Accepted / total captures: 10 / 10 | ID: cfg_2a215101052a1f6f0f78

16QAM | 320 km | 5 dBm | edfa 5dB

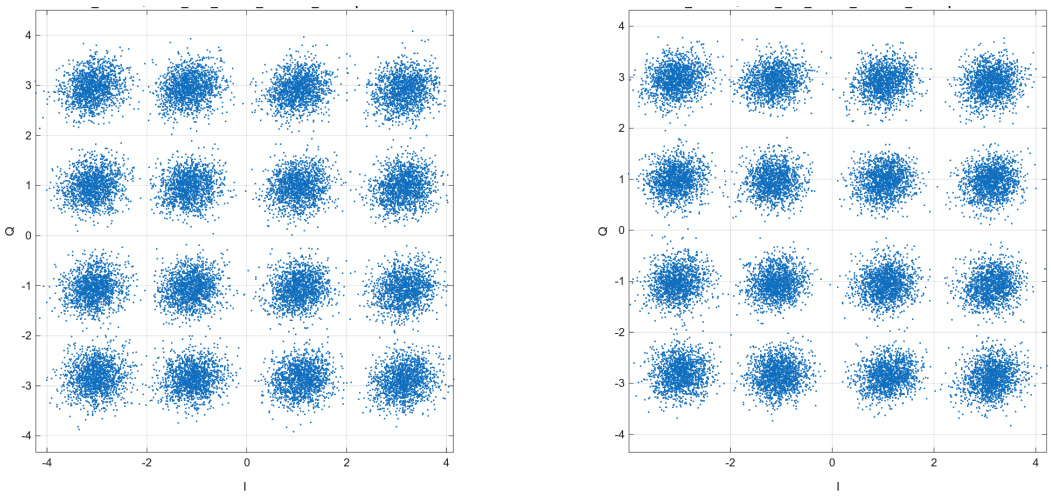

Representative BER: 0.00049937 | configuration mean: 0.00047308
Accepted / total captures: 8 / 10 | ID: cfg_839c293ebf971d3279df

Constellations | configurations 155-156

16QAM | 320 km | 5 dBm | edfa 9dB

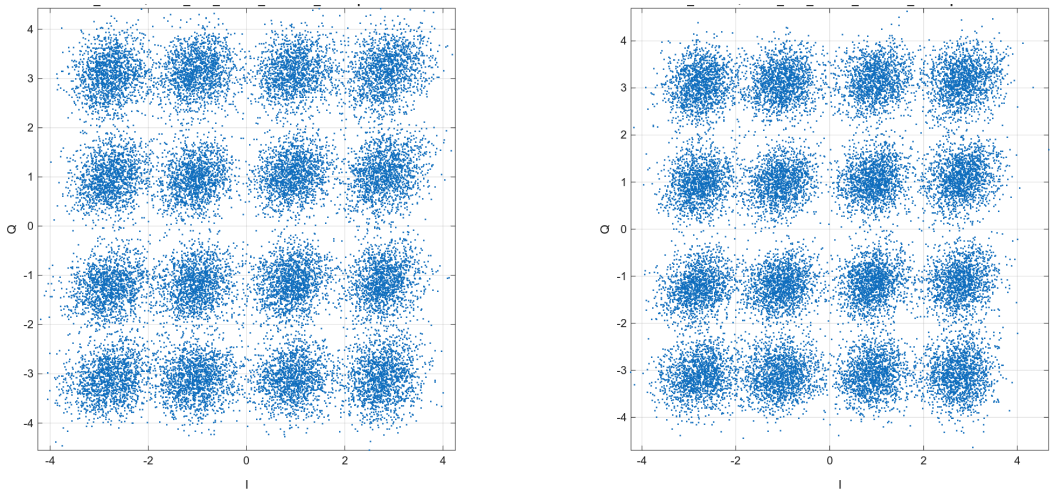

Representative BER: 0.0057335 | configuration mean: 0.0055695
Accepted / total captures: 7 / 10 | ID: cfg_52848ec25de22f1e00f2

16QAM | 320 km | 5 dBm | wss offset 4GHz

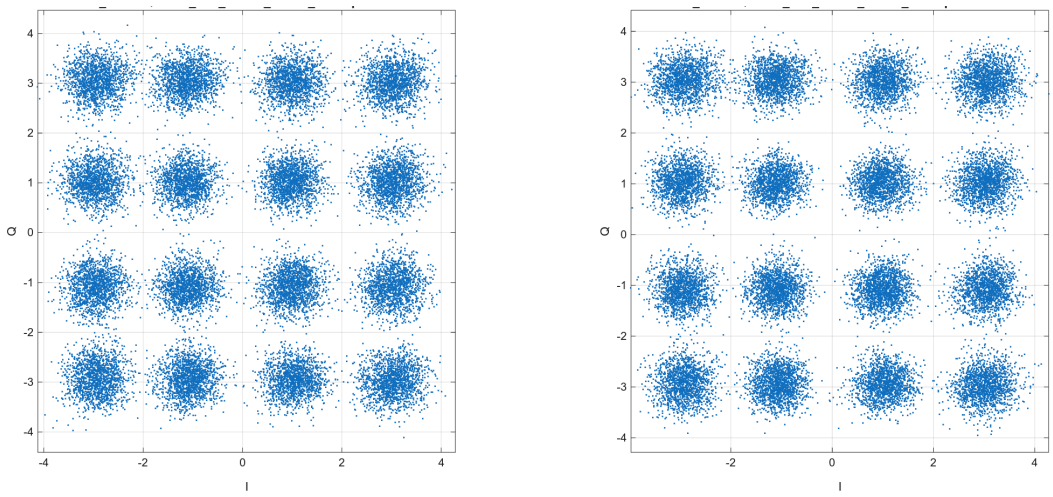

Representative BER: 0.00085852 | configuration mean: 0.00080171
Accepted / total captures: 10 / 10 | ID: cfg_281328cb36eb3774014f

Constellations | configurations 157-158

16QAM | 320 km | 5 dBm | wss offset 8GHz

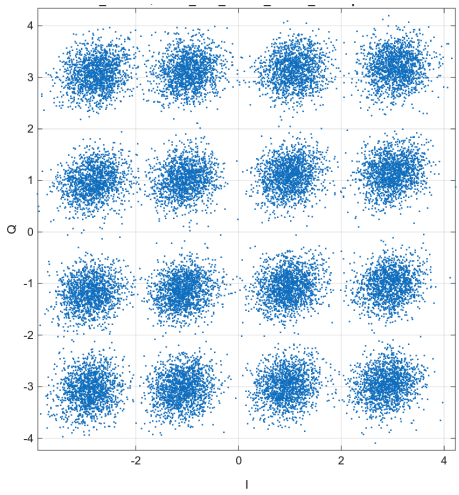

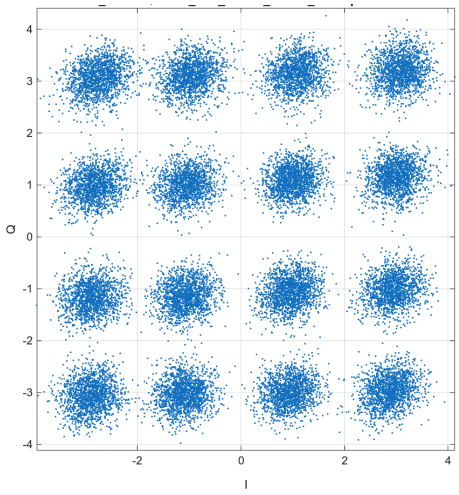

Representative BER: 0.0011375 | configuration mean: 0.001144
Accepted / total captures: 10 / 10 | ID: cfg_e5c42d9a656ea619fdef

16QAM | 320 km | 5 dBm | wss offset 12GHz

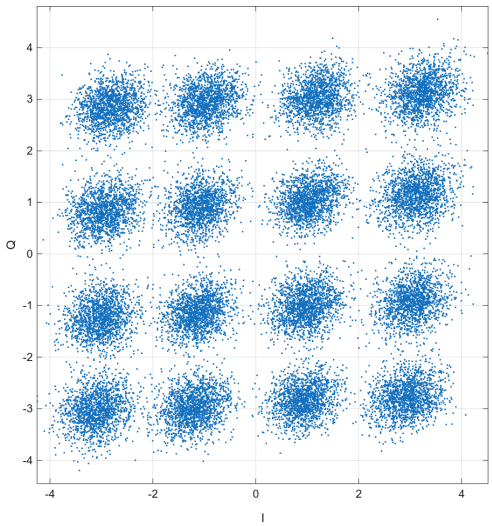

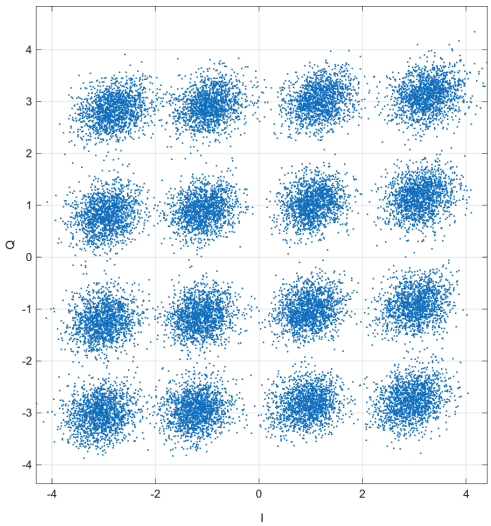

Representative BER: 0.001863 | configuration mean: 0.0018957
Accepted / total captures: 10 / 10 | ID: cfg_687b108073f2ed43e5ee

Constellations | configurations 159-160

16QAM | 320 km | 5 dBm | wss offset 16GHz

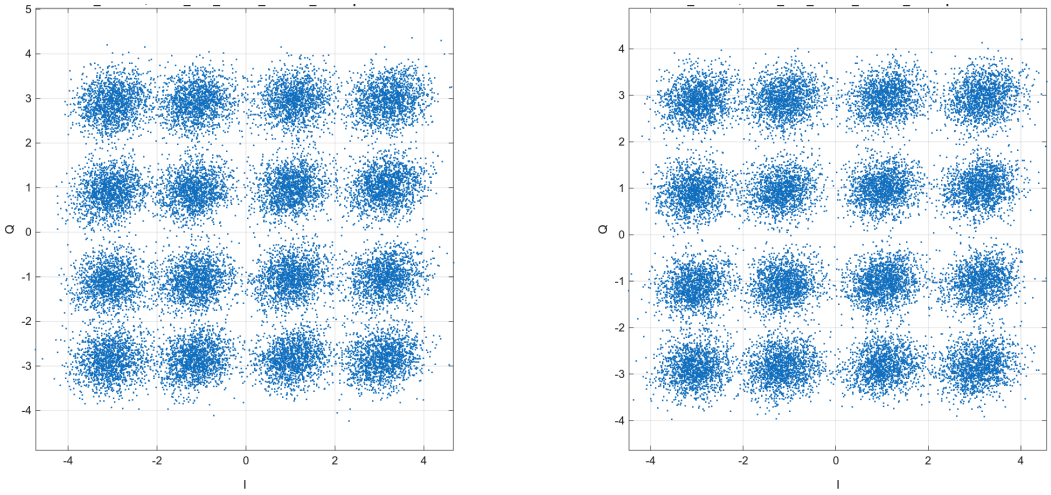

Representative BER: 0.0052026 | configuration mean: 0.004843
Accepted / total captures: 10 / 10 | ID: cfg_c64fac5cc9ffa5c9d3e4

16QAM | 320 km | 5 dBm | wss offset 20GHz

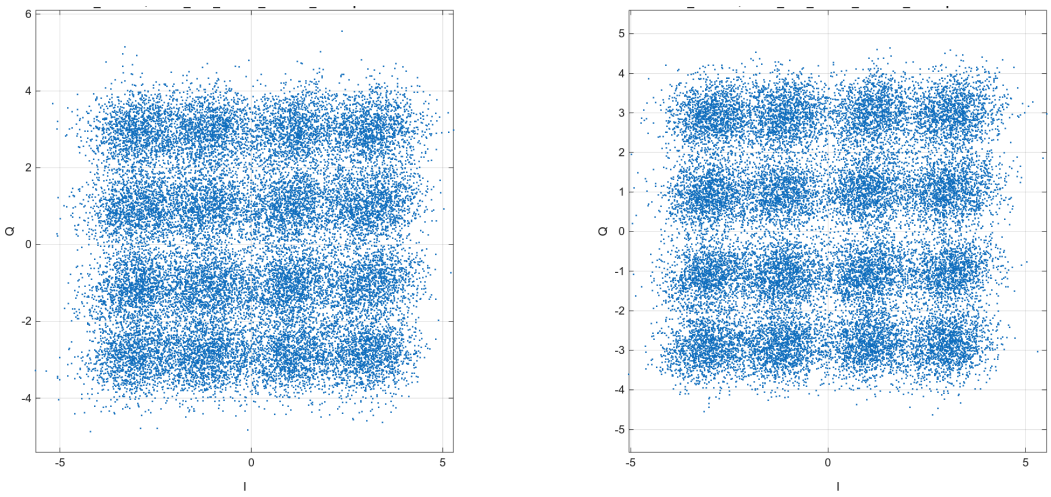

Representative BER: 0.033318 | configuration mean: 0.032031
Accepted / total captures: 11 / 11 | ID: cfg_9b0d8bb4991a42ee82ee

Constellations | configurations 161-162

16QAM | 320 km | 5 dBm | wss offset 24GHz

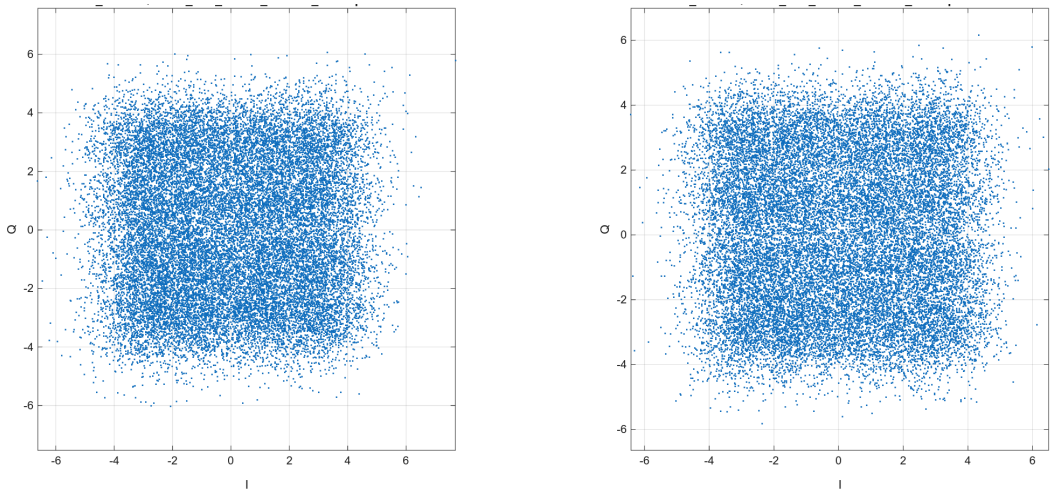

Representative BER: 0.099888 | configuration mean: 0.099561
Accepted / total captures: 11 / 11 | ID: cfg_204cbdb044afcdac1ceb

16QAM | 320 km | 5 dBm | Normal

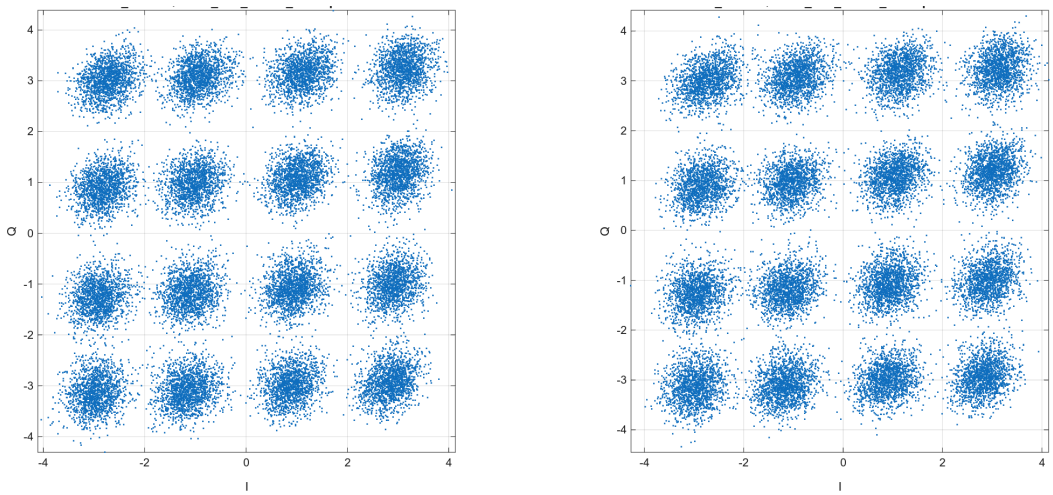

Representative BER: 0.0011032 | configuration mean: 0.0011158
Accepted / total captures: 17 / 17 | ID: cfg_1085d124ff4b08f7100c

Constellations | configurations 163-164

16QAM | 640 km | 1 dBm | attenuation 3dB

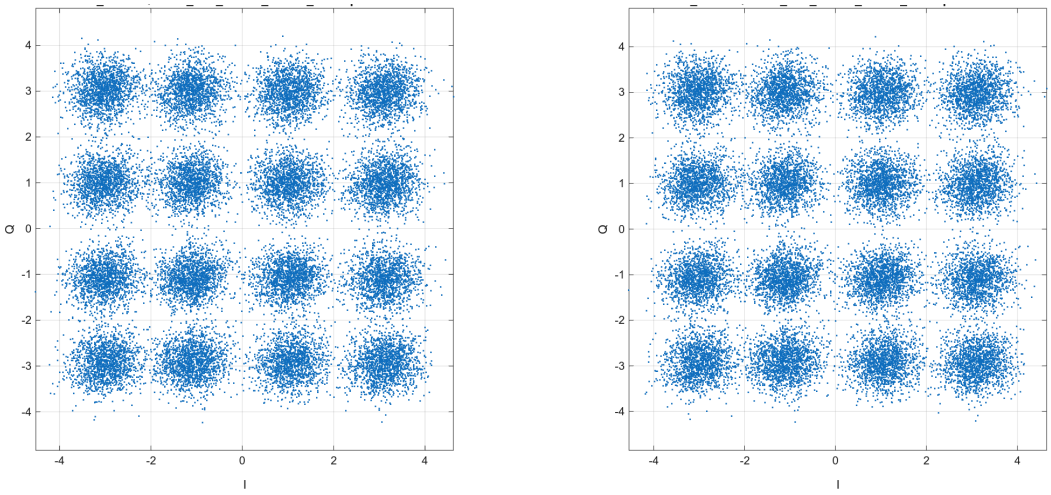

Representative BER: 0.0031336 | configuration mean: 0.0034185
Accepted / total captures: 10 / 10 | ID: cfg_38393637bee0883cef57

16QAM | 640 km | 1 dBm | attenuation 5dB

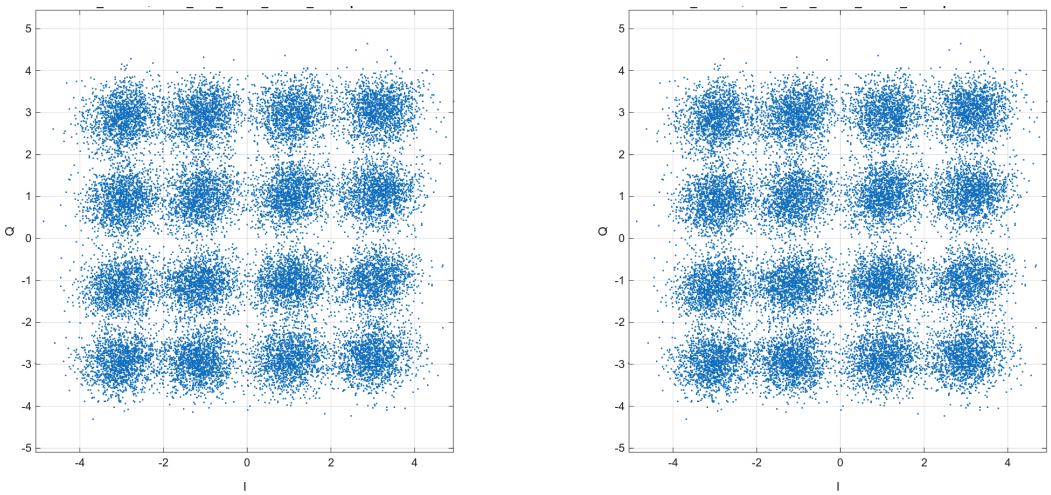

Representative BER: 0.0083906 | configuration mean: 0.008578
Accepted / total captures: 9 / 10 | ID: cfg_1c5384fb98b9f01e062e

Constellations | configurations 165-166

16QAM | 640 km | 1 dBm | edfa 1dB

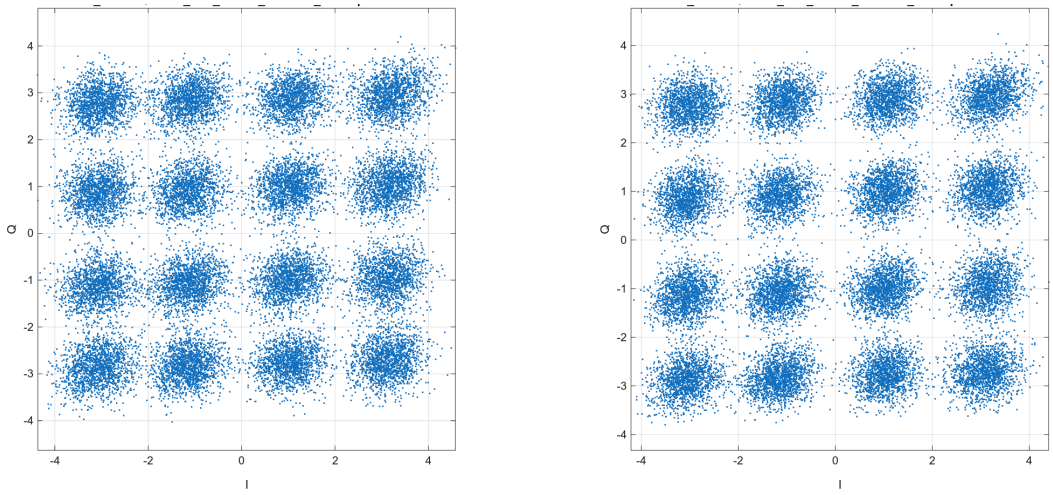

Representative BER: 0.0028446 | configuration mean: 0.0031217
Accepted / total captures: 6 / 10 | ID: cfg_e1c8c05c0440ca4430b9

16QAM | 640 km | 1 dBm | edfa 3dB

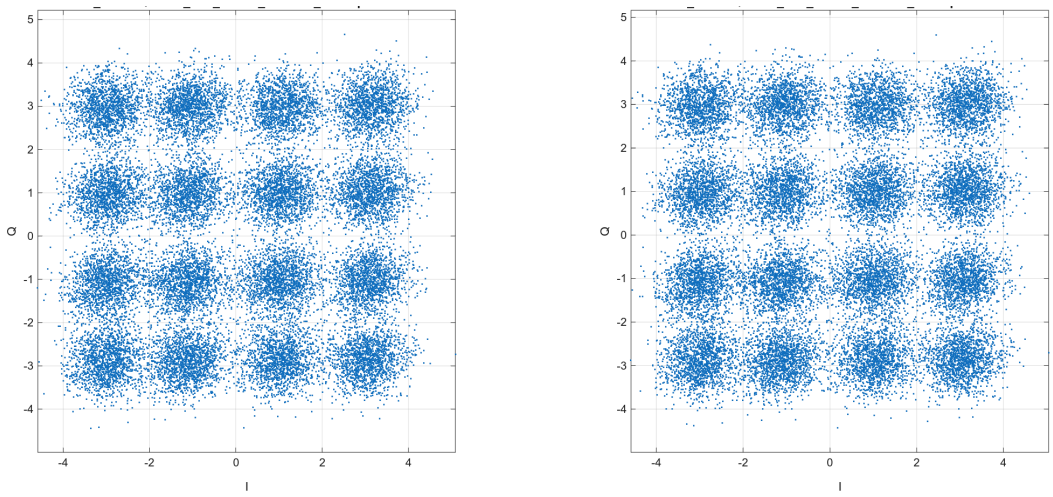

Representative BER: 0.010189 | configuration mean: 0.0099881
Accepted / total captures: 8 / 10 | ID: cfg_dc0fe43861322b60f14f

Constellations | configurations 167-168

16QAM | 640 km | 1 dBm | edfa 5dB

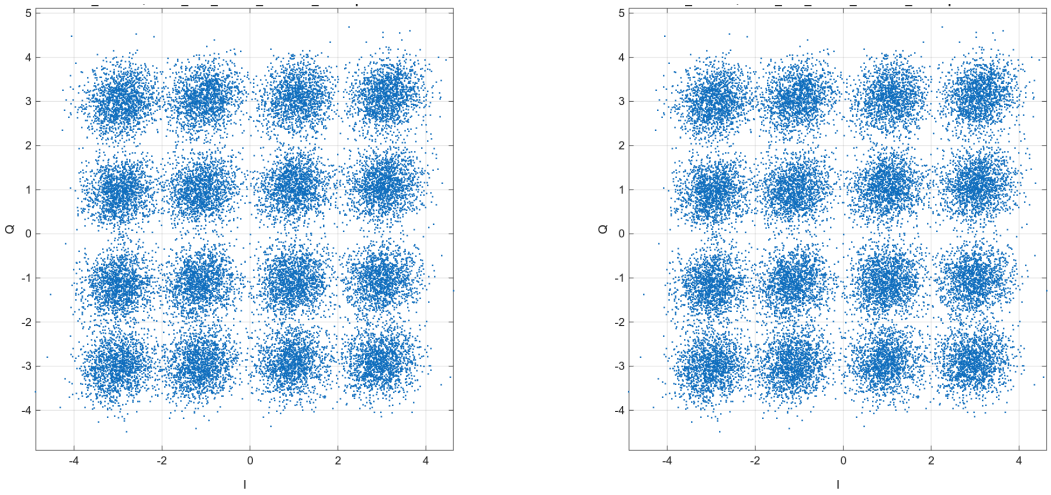

Representative BER: 0.0067222 | configuration mean: 0.0070201
Accepted / total captures: 5 / 10 | ID: cfg_27923e2d521d87cf45a4

16QAM | 640 km | 1 dBm | edfa 9dB

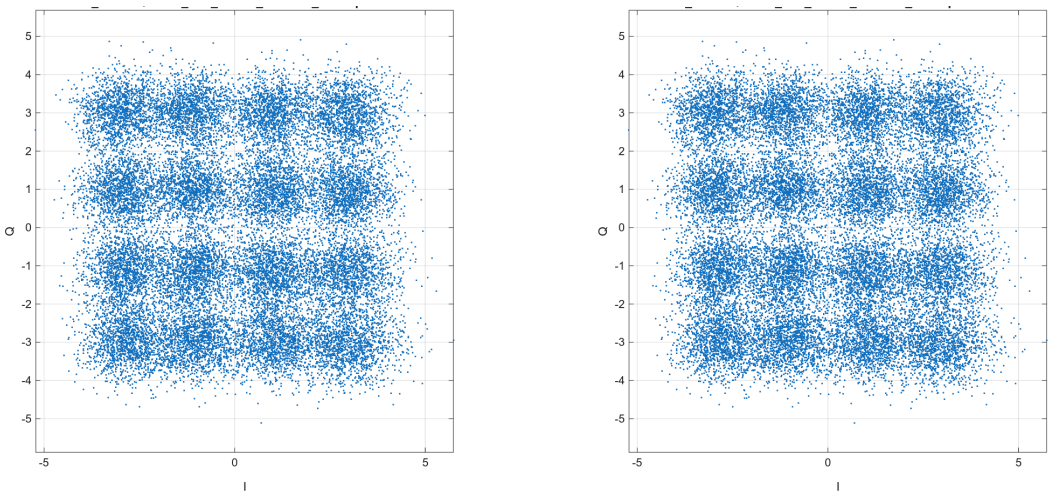

Representative BER: 0.028211 | configuration mean: 0.027196
Accepted / total captures: 5 / 10 | ID: cfg_acc0cf747b82e40e26af

Constellations | configurations 169-170

16QAM | 640 km | 1 dBm | wss offset 4GHz

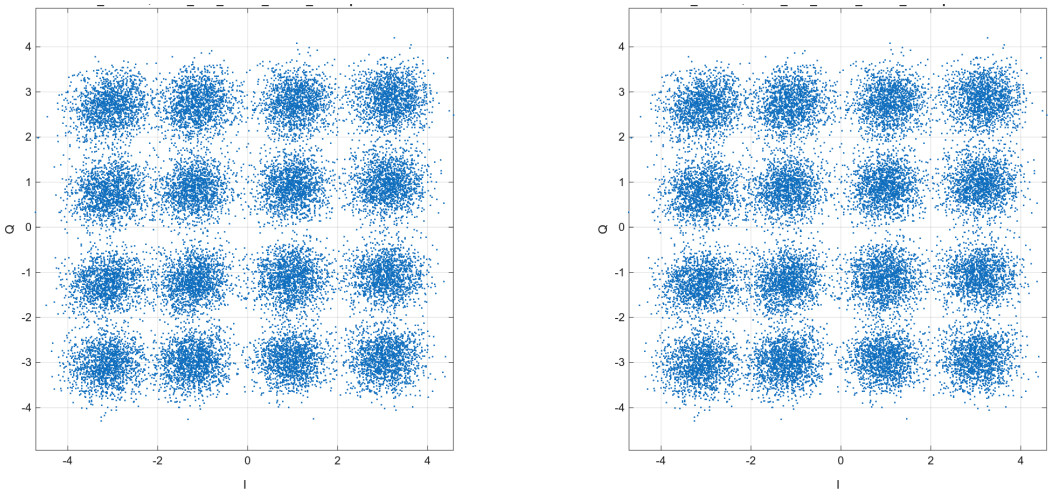

Representative BER: 0.0056548 | configuration mean: 0.0056996
Accepted / total captures: 6 / 10 | ID: cfg_e4fa404e0c21aadfe1b3

16QAM | 640 km | 1 dBm | wss offset 8GHz

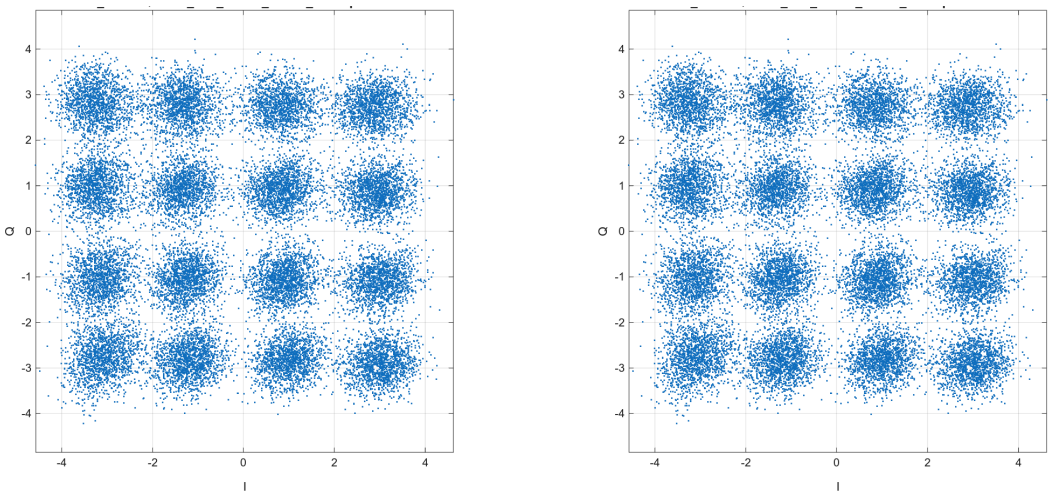

Representative BER: 0.0089658 | configuration mean: 0.0076796
Accepted / total captures: 7 / 10 | ID: cfg_01929eda10330b811c79

Constellations | configurations 171-172

16QAM | 640 km | 1 dBm | wss offset 12GHz

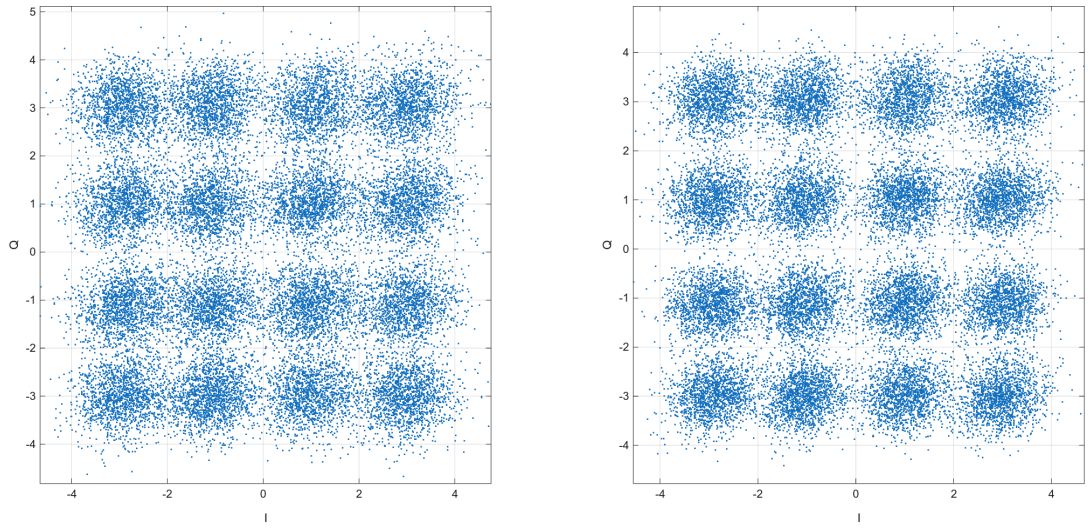

Representative BER: 0.011879 | configuration mean: 0.011881
Accepted / total captures: 7 / 10 | ID: cfg_541e3b108b74cf6710b1

16QAM | 640 km | 1 dBm | wss offset 16GHz

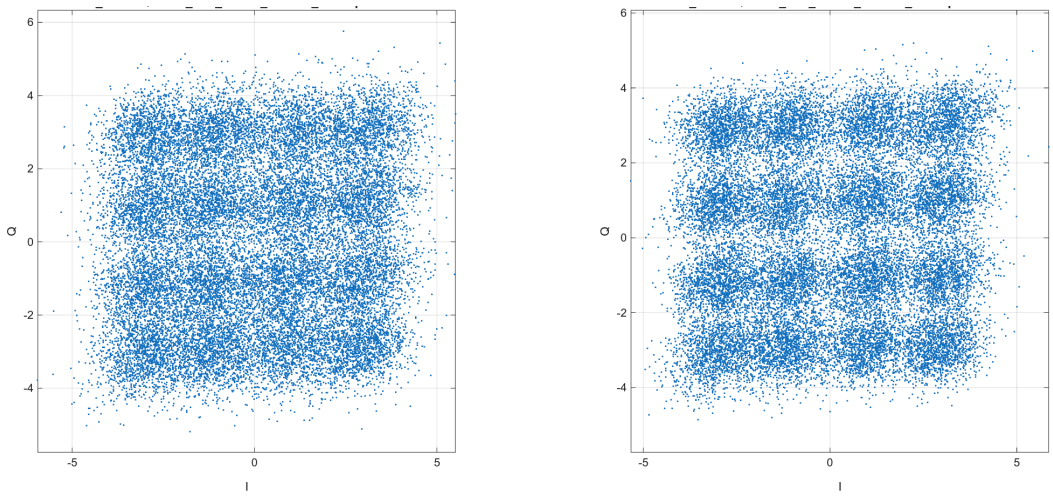

Representative BER: 0.044013 | configuration mean: 0.042961
Accepted / total captures: 9 / 10 | ID: cfg_c7cb8ef797d83b942459

Constellations | configurations 173-174

16QAM | 640 km | 1 dBm | wss offset 20GHz

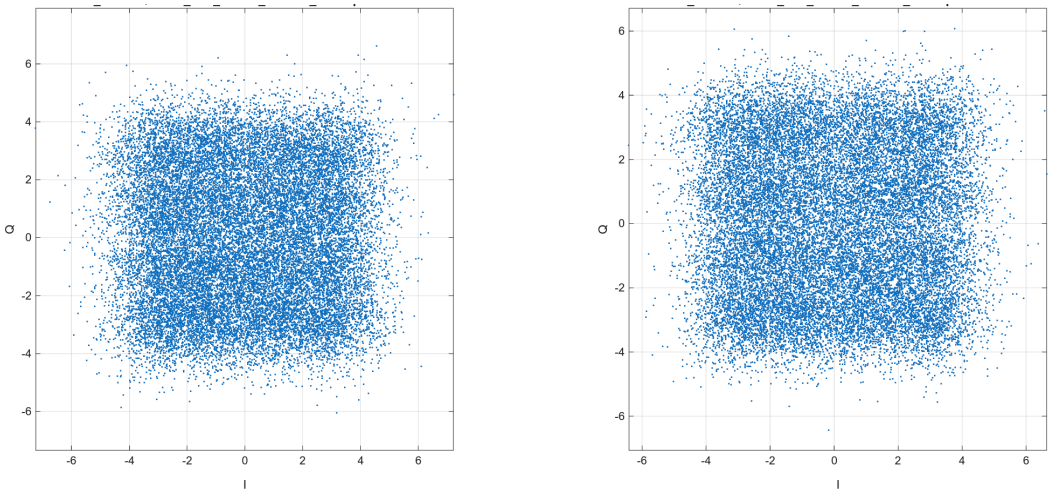

Representative BER: 0.1035 | configuration mean: 0.10363
Accepted / total captures: 10 / 10 | ID: cfg_ad6fe31d9fbc68ac2dff

16QAM | 640 km | 1 dBm | wss offset 24GHz

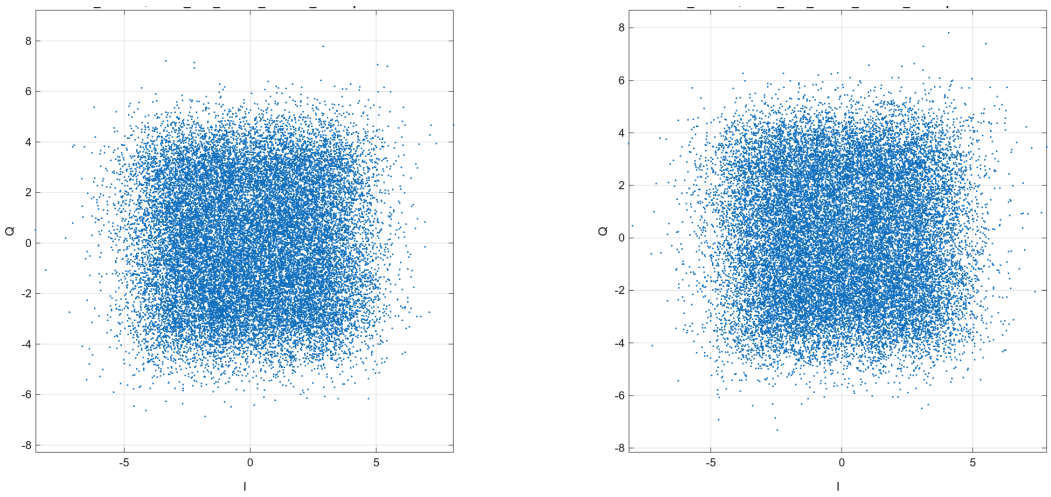

Representative BER: 0.15369 | configuration mean: 0.1534
Accepted / total captures: 10 / 10 | ID: cfg_c727c1c60bde273f1181

Constellations | configurations 175-176

16QAM | 640 km | 1 dBm | wss bandwidth 55GHz

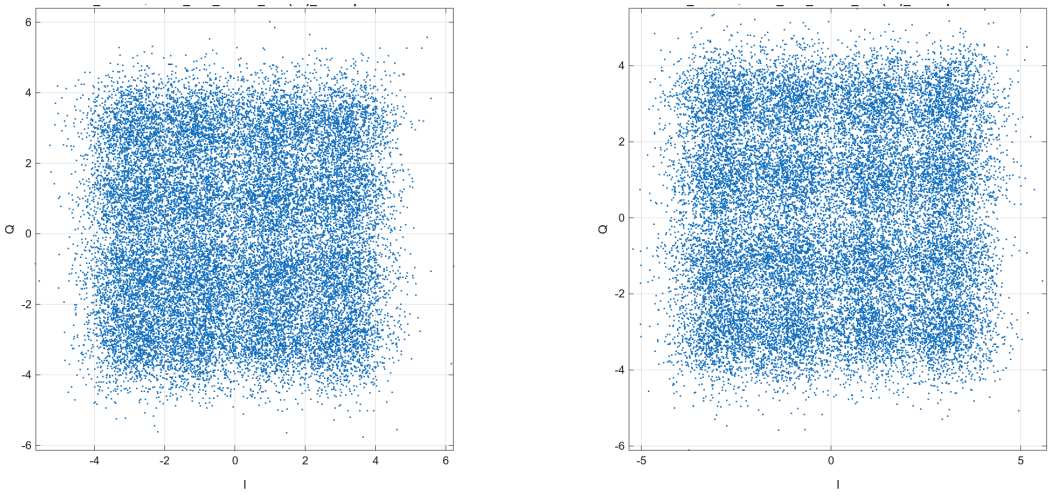

Representative BER: 0.062745 | configuration mean: 0.063188
Accepted / total captures: 10 / 10 | ID: cfg_baeb44c41e3dec1f5ba3

16QAM | 640 km | 1 dBm | wss bandwidth 60GHz

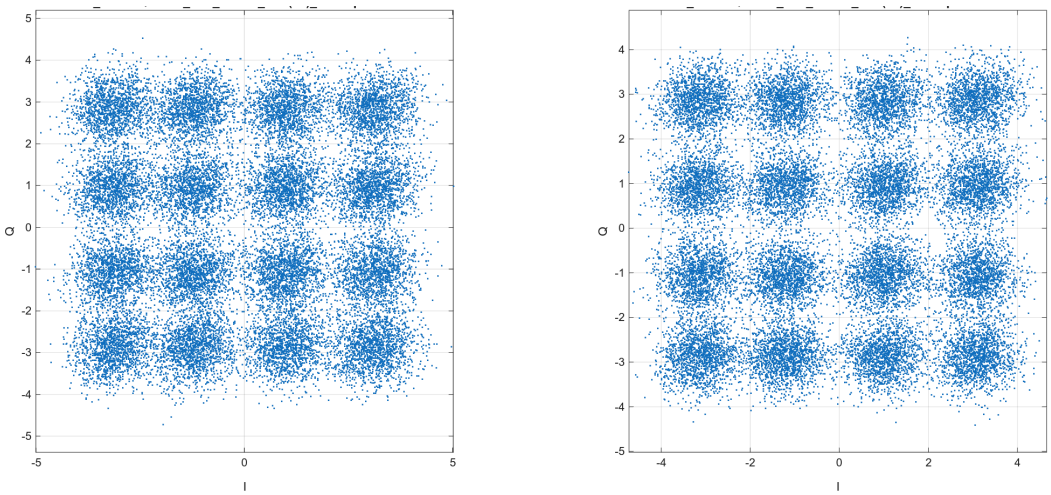

Representative BER: 0.014779 | configuration mean: 0.014391
Accepted / total captures: 6 / 10 | ID: cfg_3e837ea67c4a4716544c

Constellations | configurations 177-178

16QAM | 640 km | 1 dBm | wss bandwidth 65GHz

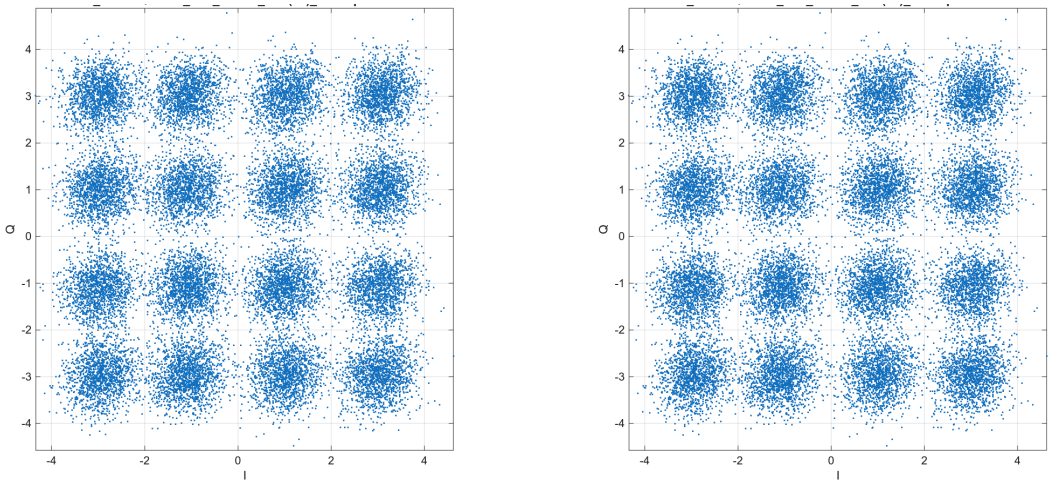

Representative BER: 0.0053371 | configuration mean: 0.005675
Accepted / total captures: 6 / 10 | ID: cfg_f65bed208b0f64ea023d

16QAM | 640 km | 1 dBm | wss bandwidth 70GHz

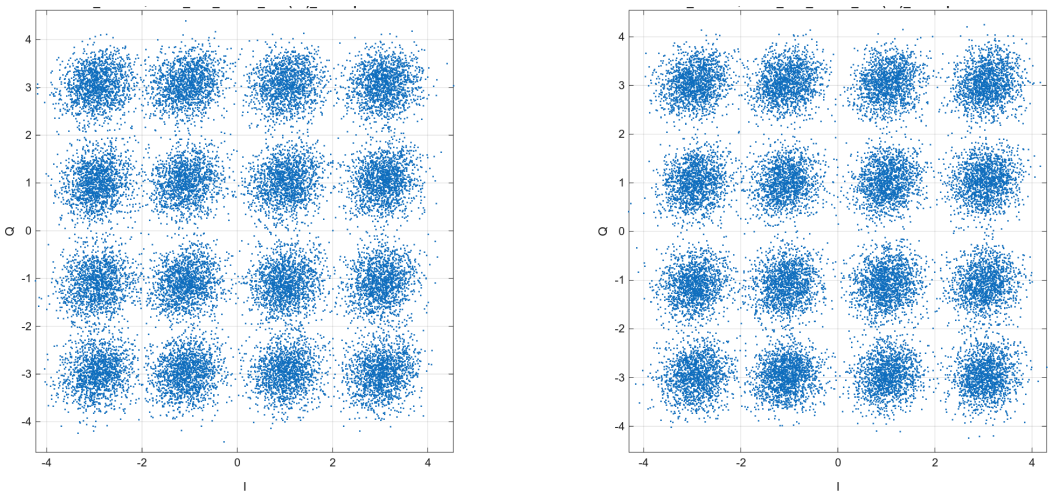

Representative BER: 0.0025741 | configuration mean: 0.0027786
Accepted / total captures: 8 / 10 | ID: cfg_7275e74ed54977062a72

Constellations | configurations 179-180

16QAM | 640 km | 1 dBm | Normal (75 GHz)

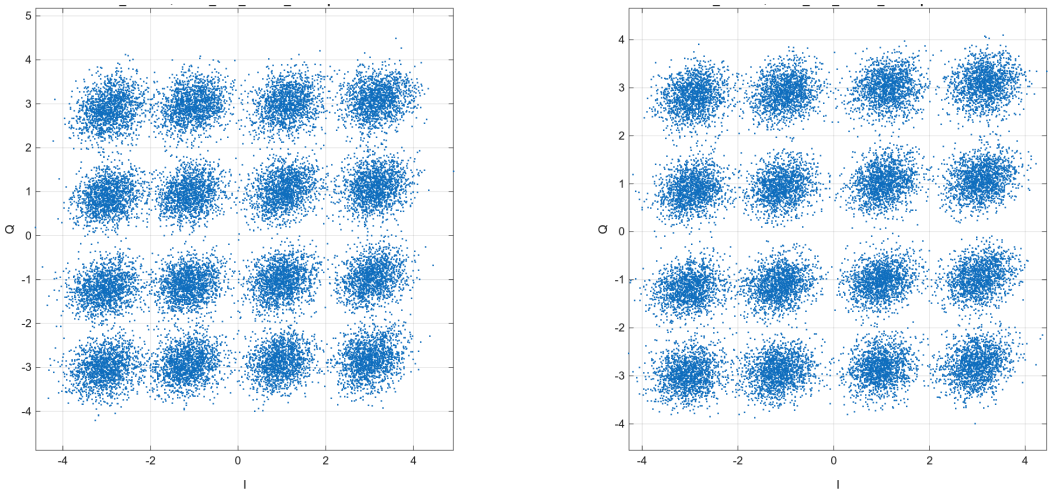

Representative BER: 0.0025155 | configuration mean: 0.0024761
Accepted / total captures: 23 / 26 | ID: cfg_33708e31a0fe87f9cdb5

16QAM | 640 km | 3 dBm | attenuation 3dB

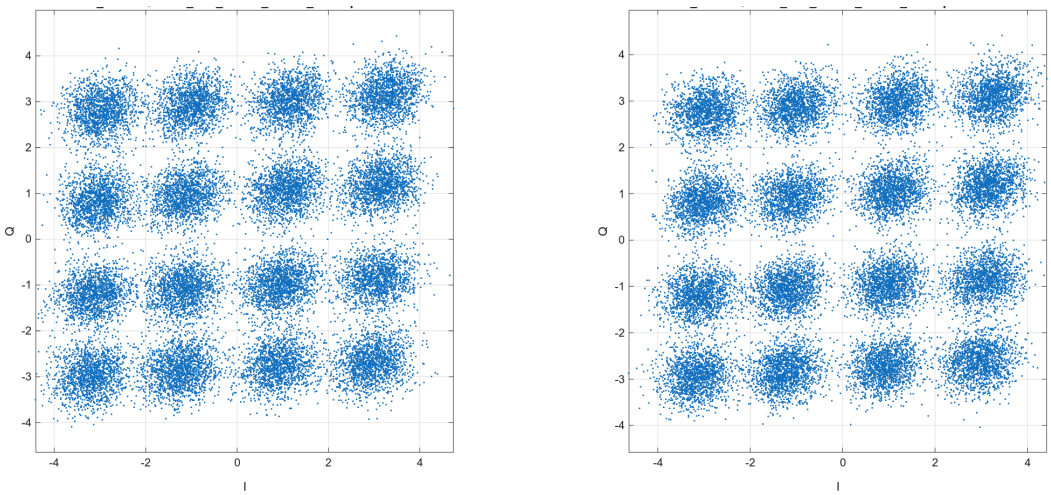

Representative BER: 0.0055603 | configuration mean: 0.0055992
Accepted / total captures: 5 / 10 | ID: cfg_bf383ccea45f5b2b5dce

Constellations | configurations 181-182

16QAM | 640 km | 3 dBm | attenuation 5dB

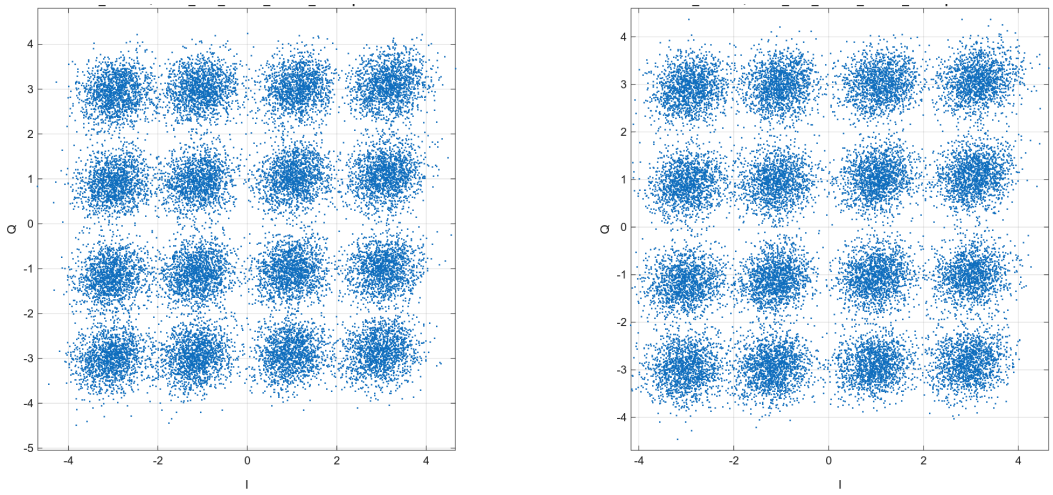

Representative BER: 0.0054401 | configuration mean: 0.0056528
Accepted / total captures: 8 / 10 | ID: cfg_67e34d2fc86dc5a0a93d

16QAM | 640 km | 3 dBm | edfa 1dB

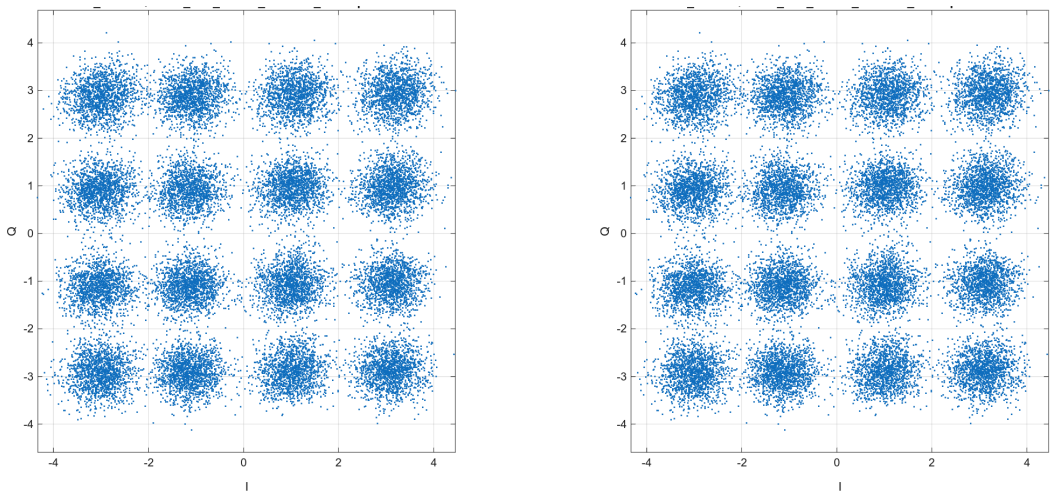

Representative BER: 0.0031851 | configuration mean: 0.0032625
Accepted / total captures: 9 / 10 | ID: cfg_56d24cbe67b4445a1463

Constellations | configurations 183-184

16QAM | 640 km | 3 dBm | edfa 3dB

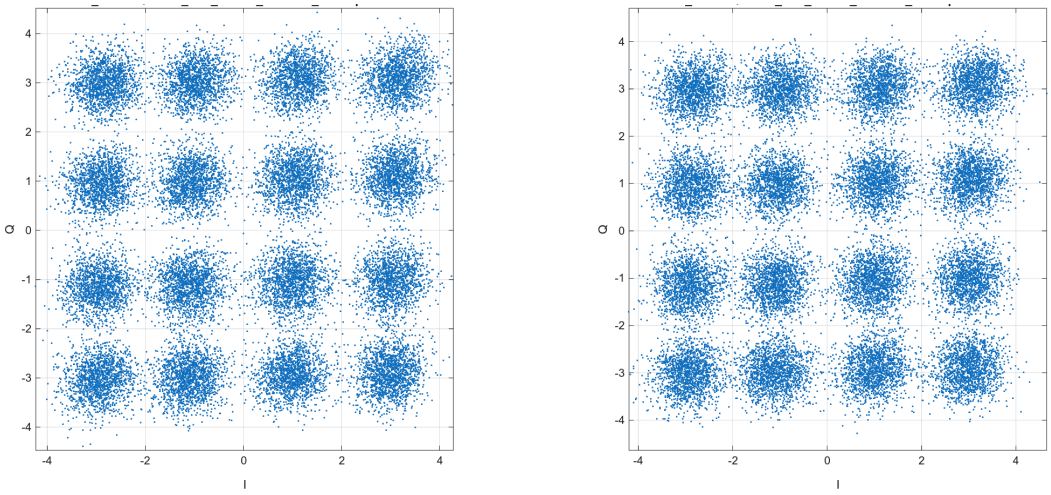

Representative BER: 0.0032781 | configuration mean: 0.0032736
Accepted / total captures: 6 / 10 | ID: cfg_237adba37c5b8c6cc4af

16QAM | 640 km | 3 dBm | edfa 5dB

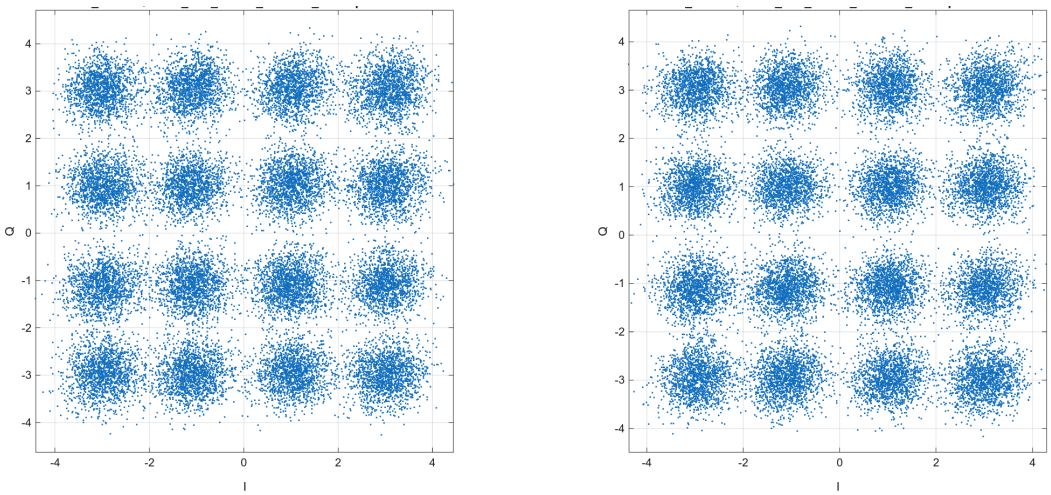

Representative BER: 0.0037431 | configuration mean: 0.004007
Accepted / total captures: 10 / 10 | ID: cfg_9e2ee5b1d1713a4dd15d

Constellations | configurations 185-186

16QAM | 640 km | 3 dBm | edfa 9dB

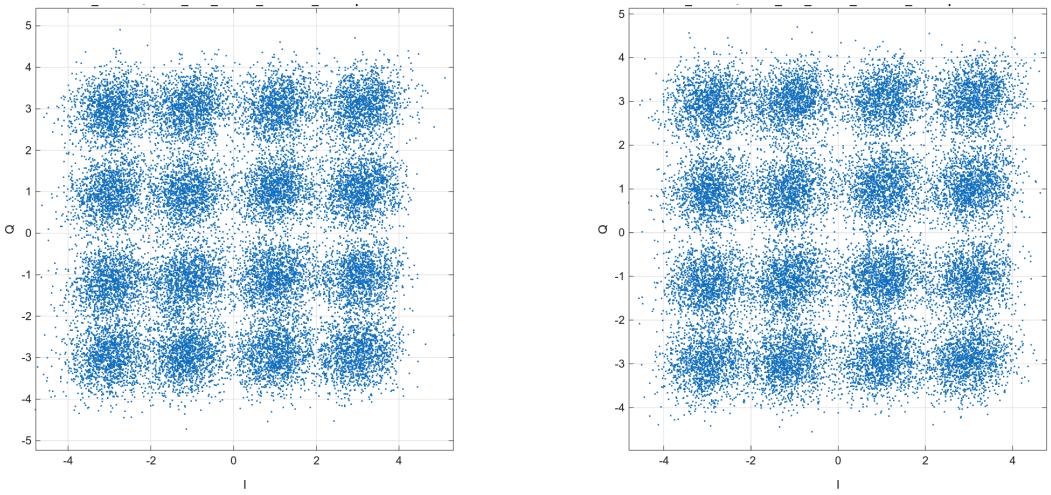

Representative BER: 0.014704 | configuration mean: 0.015252
Accepted / total captures: 5 / 10 | ID: cfg_2ffe99f7b668df8a243c

16QAM | 640 km | 3 dBm | wss offset 4GHz

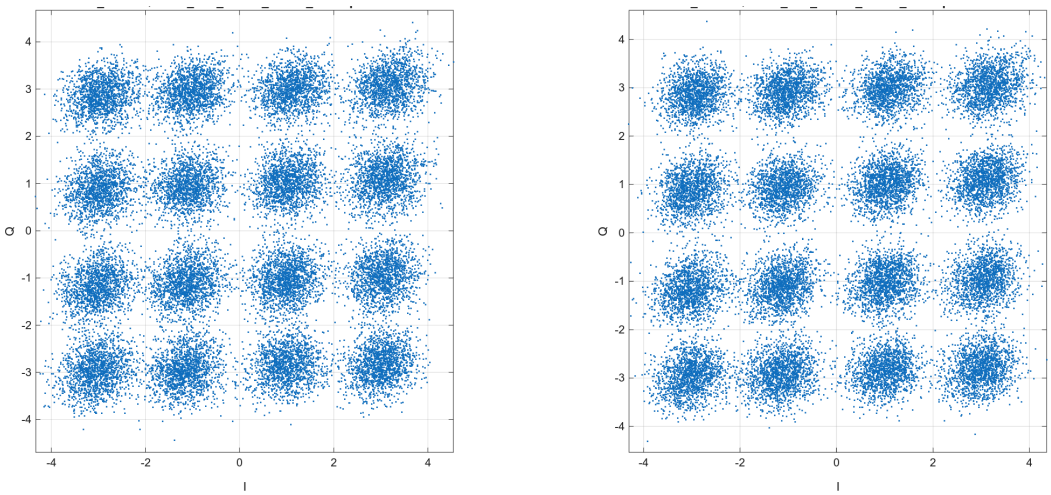

Representative BER: 0.0036516 | configuration mean: 0.0036244
Accepted / total captures: 9 / 10 | ID: cfg_b9b8ab387656f648613e

Constellations | configurations 187-188

16QAM | 640 km | 3 dBm | wss offset 8GHz

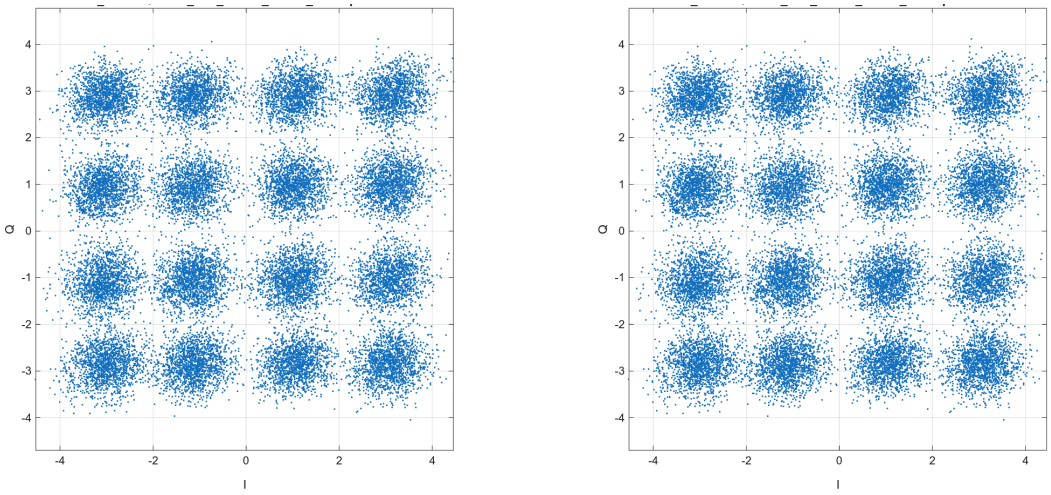

Representative BER: 0.004387 | configuration mean: 0.0044105
Accepted / total captures: 7 / 10 | ID: cfg_bc0b6bdf3b0f14115d4d

16QAM | 640 km | 3 dBm | wss offset 12GHz

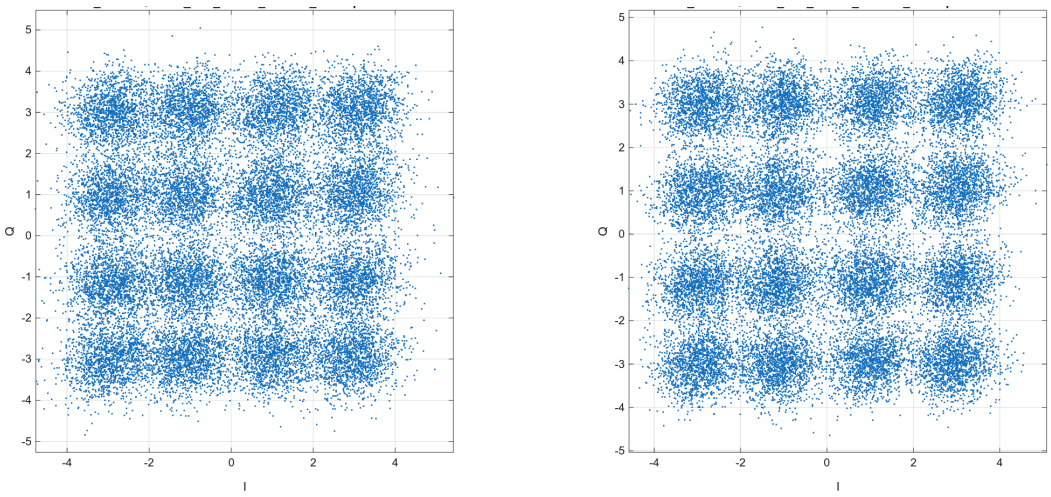

Representative BER: 0.019467 | configuration mean: 0.019561
Accepted / total captures: 8 / 10 | ID: cfg_8fd00df96fab25df9c92

Constellations | configurations 189-190

16QAM | 640 km | 3 dBm | wss offset 16GHz

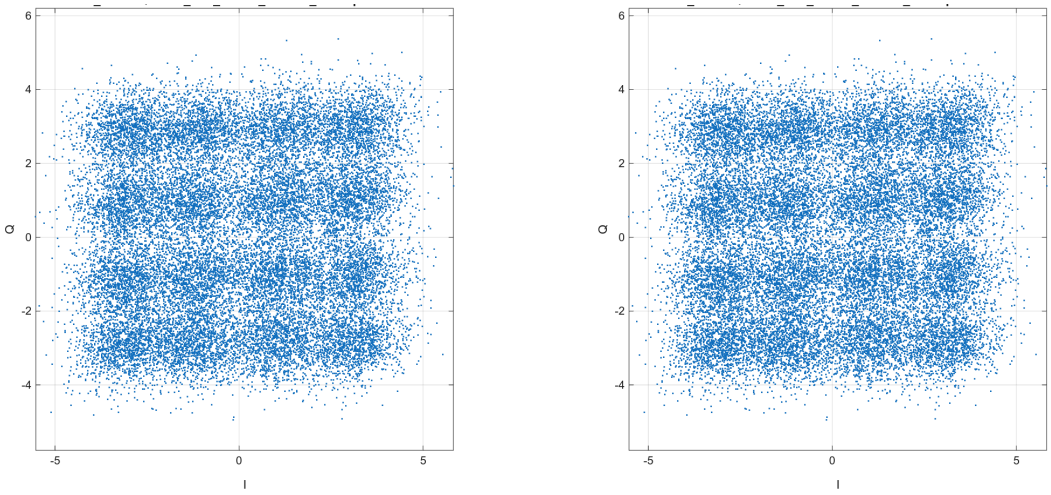

Representative BER: 0.053666 | configuration mean: 0.054877
Accepted / total captures: 10 / 10 | ID: cfg_0ae89e8073acda668c52

16QAM | 640 km | 3 dBm | wss offset 20GHz

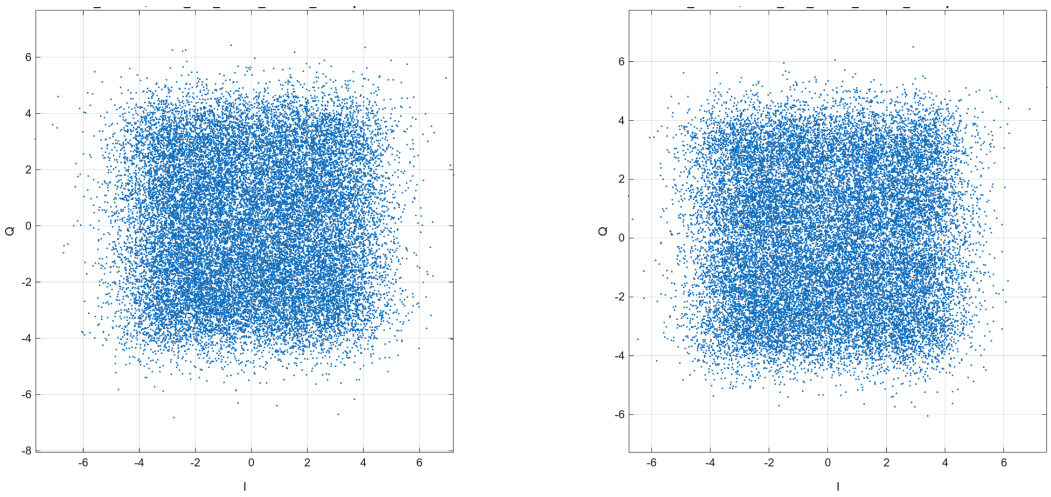

Representative BER: 0.1127 | configuration mean: 0.11258
Accepted / total captures: 10 / 10 | ID: cfg_176134bba041e0ecb0b6

Constellations | configurations 191-192

16QAM | 640 km | 3 dBm | wss offset 24GHz

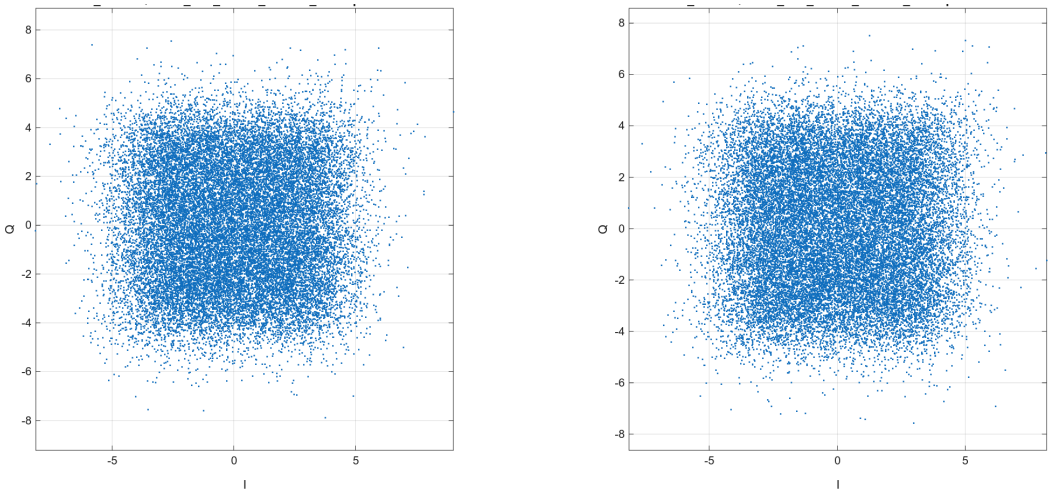

Representative BER: 0.15394 | configuration mean: 0.15397
Accepted / total captures: 10 / 10 | ID: cfg_c812387f076d58bfe38e

16QAM | 640 km | 3 dBm | wss bandwidth 55GHz

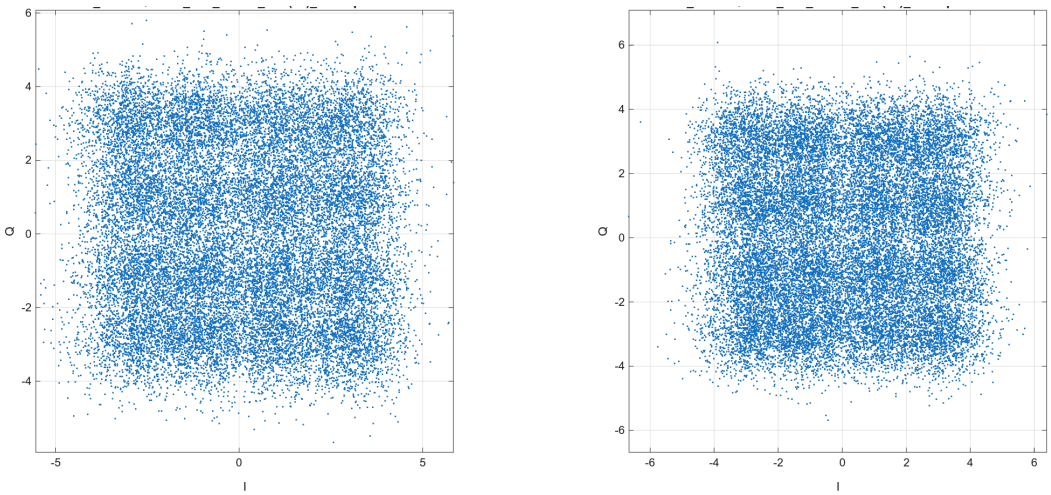

Representative BER: 0.072254 | configuration mean: 0.072386
Accepted / total captures: 10 / 10 | ID: cfg_611dc3141bb655a8b214

Constellations | configurations 193-194

16QAM | 640 km | 3 dBm | wss bandwidth 60GHz

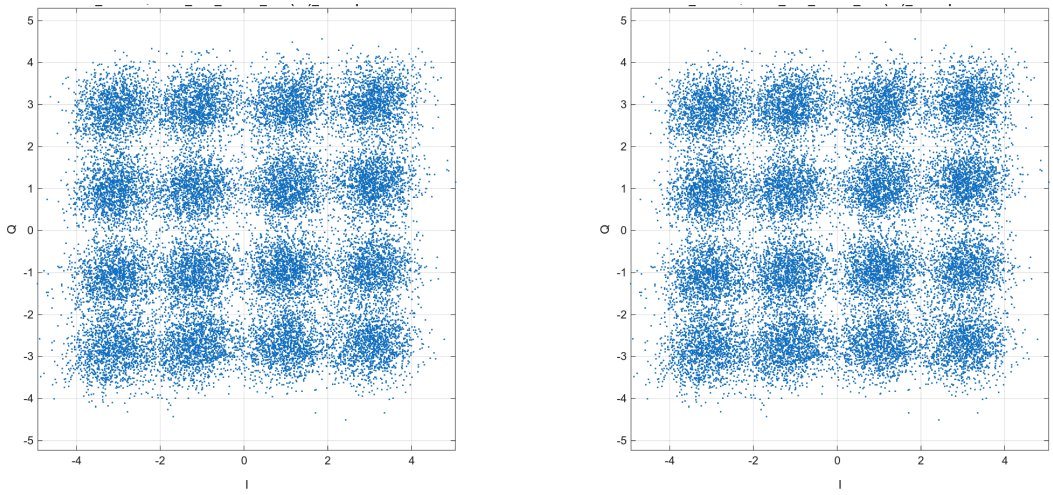

Representative BER: 0.01614 | configuration mean: 0.016054
Accepted / total captures: 10 / 10 | ID: cfg_b2cf8f75a965703fdef0

16QAM | 640 km | 3 dBm | wss bandwidth 65GHz

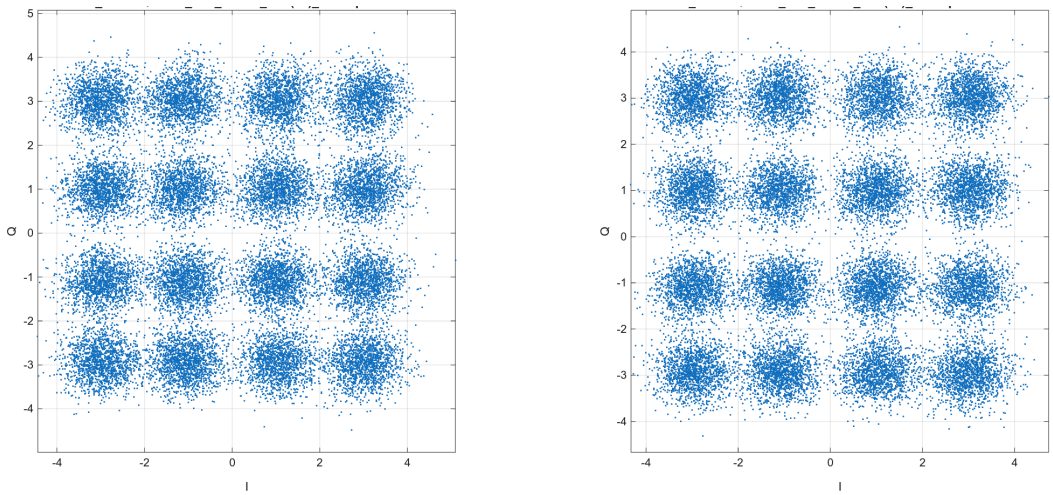

Representative BER: 0.005732 | configuration mean: 0.0059312
Accepted / total captures: 6 / 10 | ID: cfg_e82a036f4c24475597b8

Constellations | configurations 195-196

16QAM | 640 km | 3 dBm | wss bandwidth 70GHz

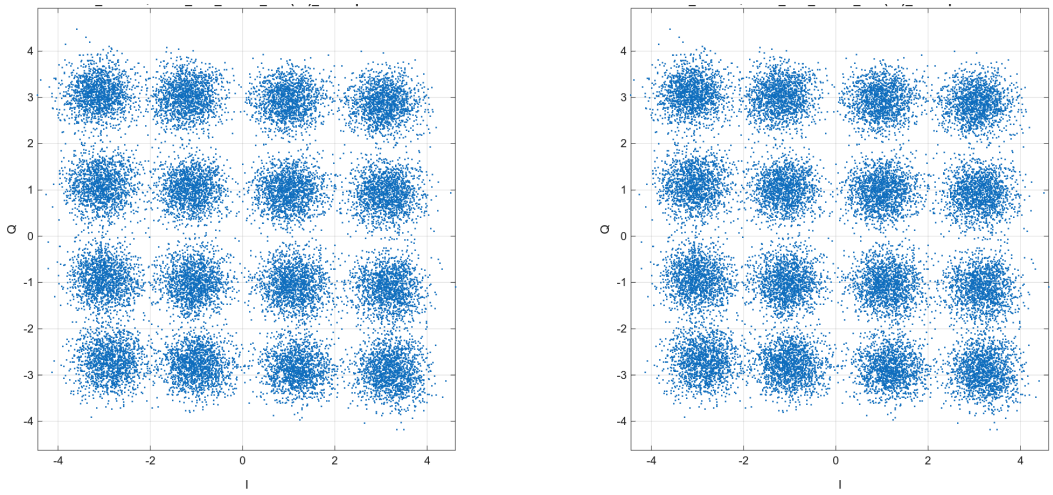

Representative BER: 0.0032194 | configuration mean: 0.0032552
Accepted / total captures: 7 / 10 | ID: cfg_3bf89e80f1bc8766d6fc

16QAM | 640 km | 3 dBm | Normal (75 GHz)

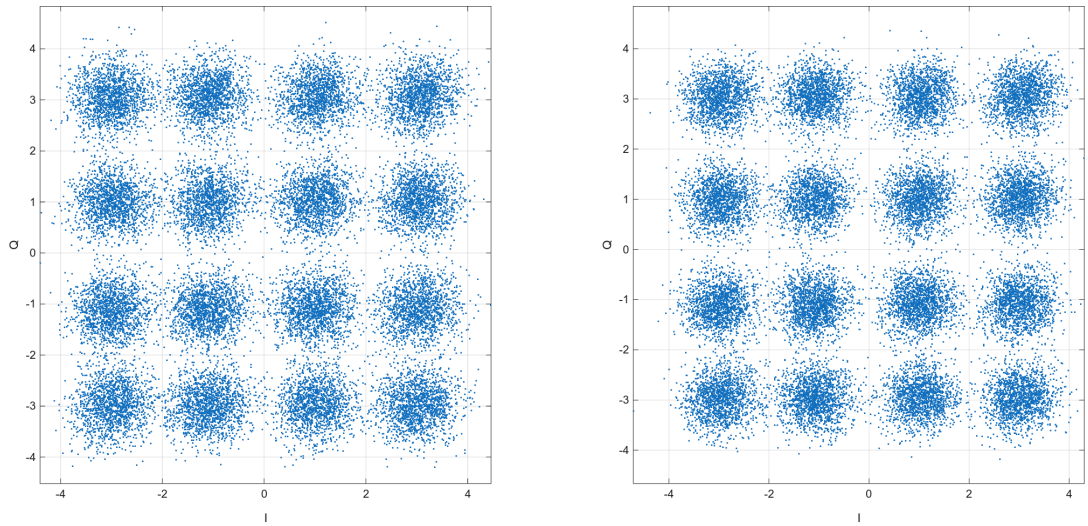

Representative BER: 0.0027287 | configuration mean: 0.0028159
Accepted / total captures: 21 / 26 | ID: cfg_634e38109a5e86e7f328

Constellations | configurations 197-198

16QAM | 640 km | 5 dBm | attenuation 3dB

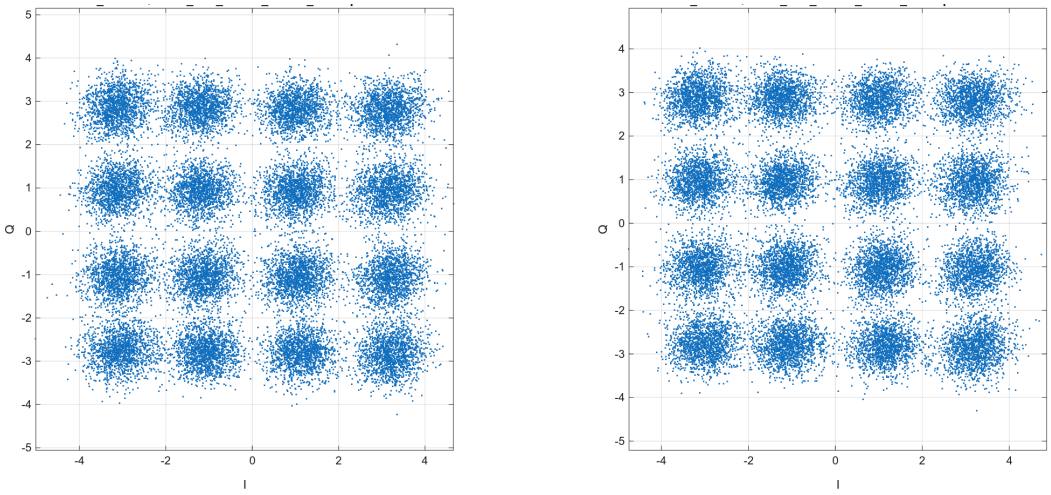

Representative BER: 0.0047877 | configuration mean: 0.0044161
Accepted / total captures: 9 / 11 | ID: cfg_acf024e0b986717b4378

16QAM | 640 km | 5 dBm | attenuation 5dB

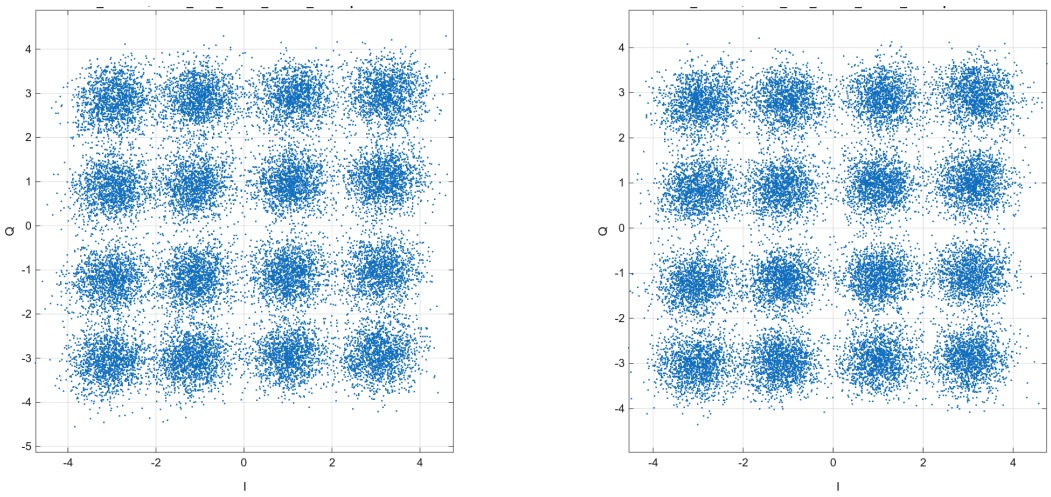

Representative BER: 0.0068037 | configuration mean: 0.0069121
Accepted / total captures: 11 / 11 | ID: cfg_07855690c94dd01437e9

Constellations | configurations 199-200

16QAM | 640 km | 5 dBm | edfa 1dB

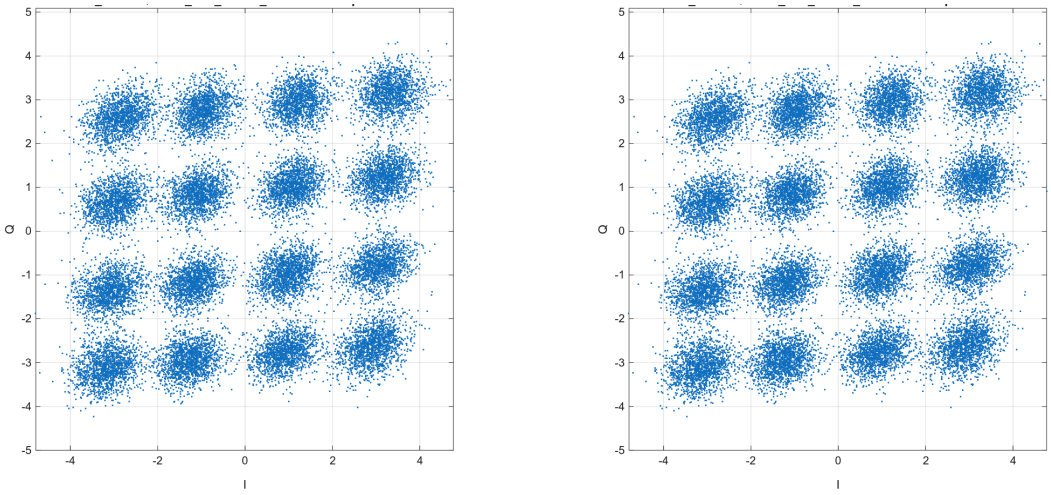

Representative BER: 0.0044299 | configuration mean: 0.0044423
Accepted / total captures: 9 / 10 | ID: cfg_f8da005770af88d0d6c1

16QAM | 640 km | 5 dBm | edfa 3dB

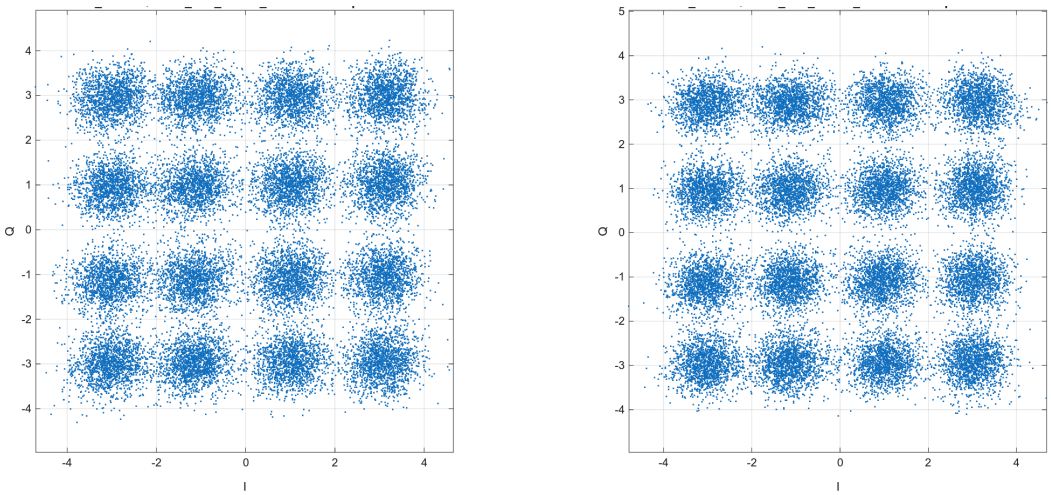

Representative BER: 0.0055145 | configuration mean: 0.0058299
Accepted / total captures: 10 / 10 | ID: cfg_9d268f6ca50c0c444639

Constellations | configurations 201-202

16QAM | 640 km | 5 dBm | edfa 5dB

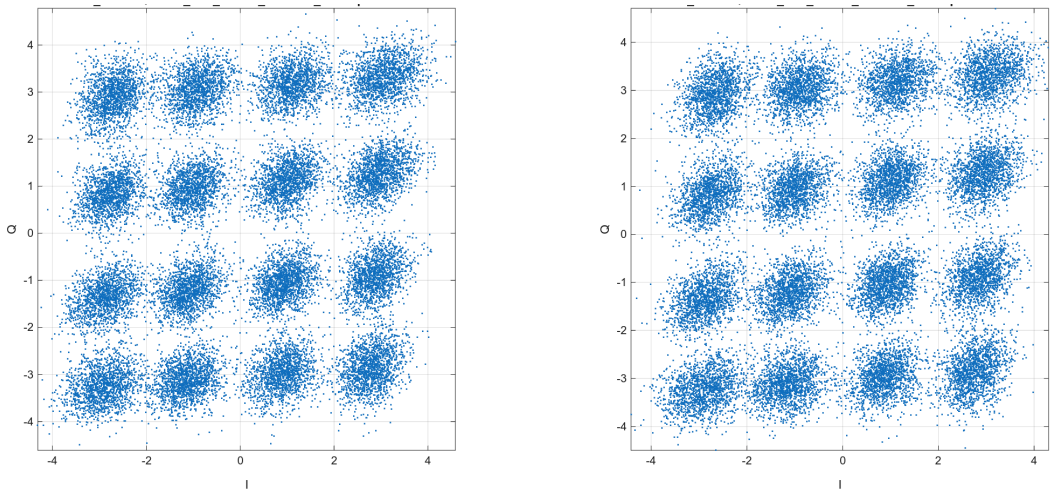

Representative BER: 0.0043341 | configuration mean: 0.0043153
Accepted / total captures: 8 / 10 | ID: cfg_9676018501d0fad1c5a9

16QAM | 640 km | 5 dBm | edfa 9dB

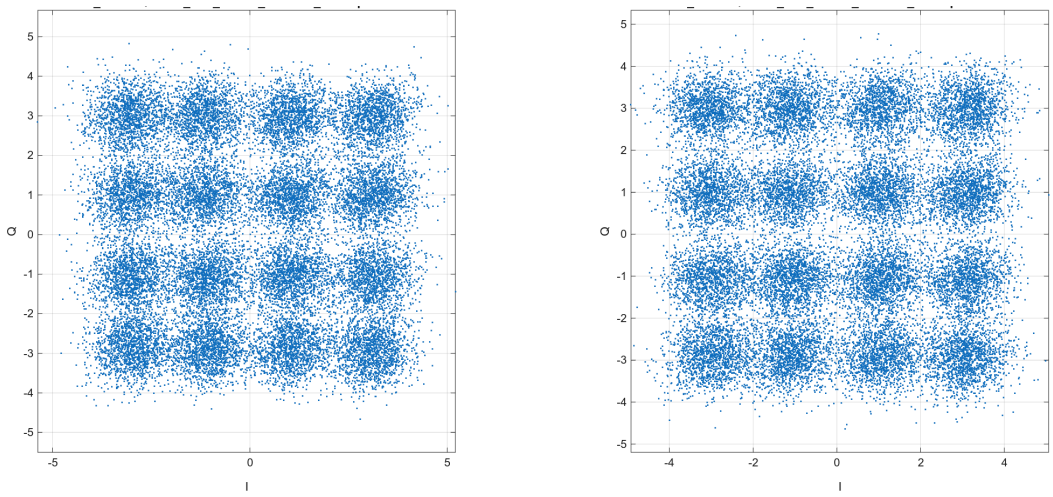

Representative BER: 0.019664 | configuration mean: 0.020352
Accepted / total captures: 10 / 10 | ID: cfg_0484bd52821a12b4bd3d

Constellations | configurations 203-204

16QAM | 640 km | 5 dBm | wss offset 4GHz

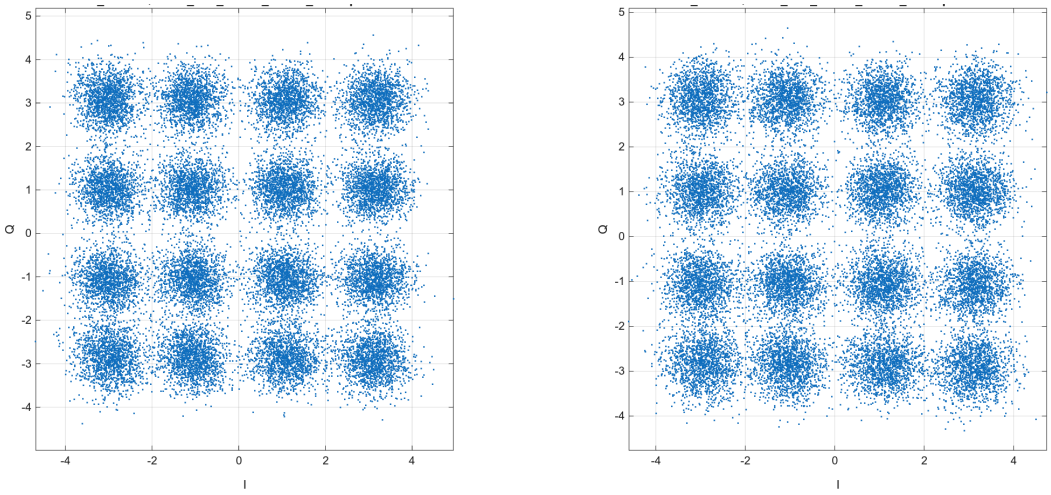

Representative BER: 0.0060726 | configuration mean: 0.0063702
Accepted / total captures: 8 / 10 | ID: cfg_4bdd32fc6d5ee0ad2e93

16QAM | 640 km | 5 dBm | wss offset 8GHz

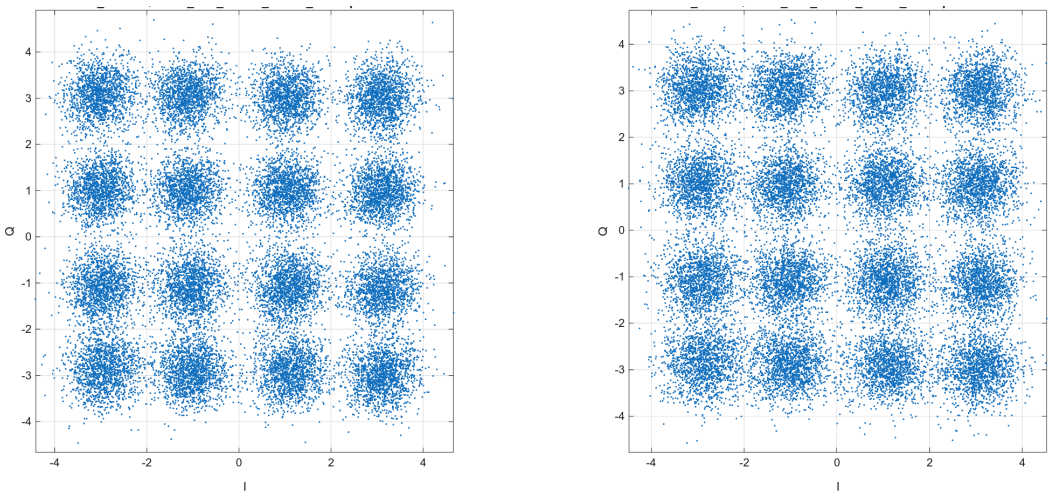

Representative BER: 0.0061198 | configuration mean: 0.0063346
Accepted / total captures: 8 / 10 | ID: cfg_acfaa2e10bca13733e48

Constellations | configurations 205-206

16QAM | 640 km | 5 dBm | wss offset 12GHz

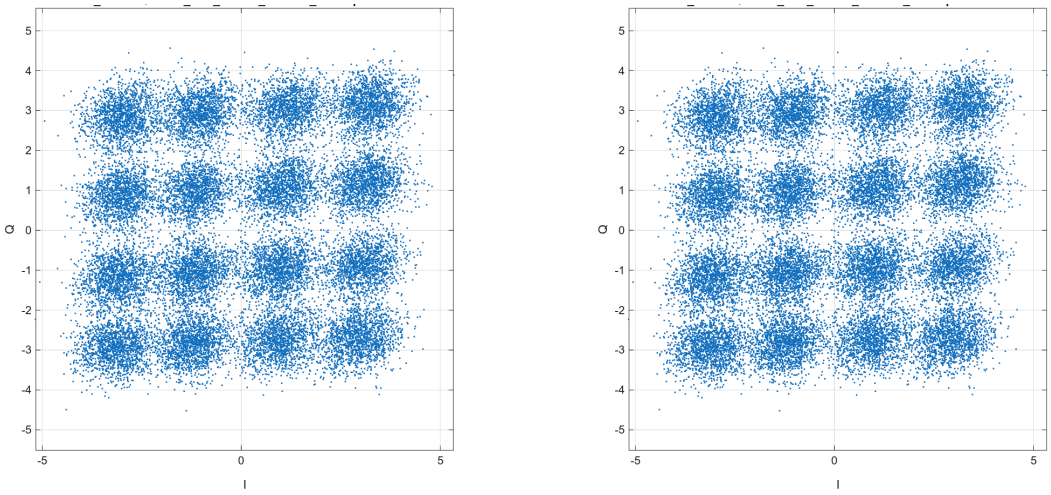

Representative BER: 0.014698 | configuration mean: 0.016176
Accepted / total captures: 5 / 10 | ID: cfg_44bb64f822618cc8d007

16QAM | 640 km | 5 dBm | wss offset 16GHz

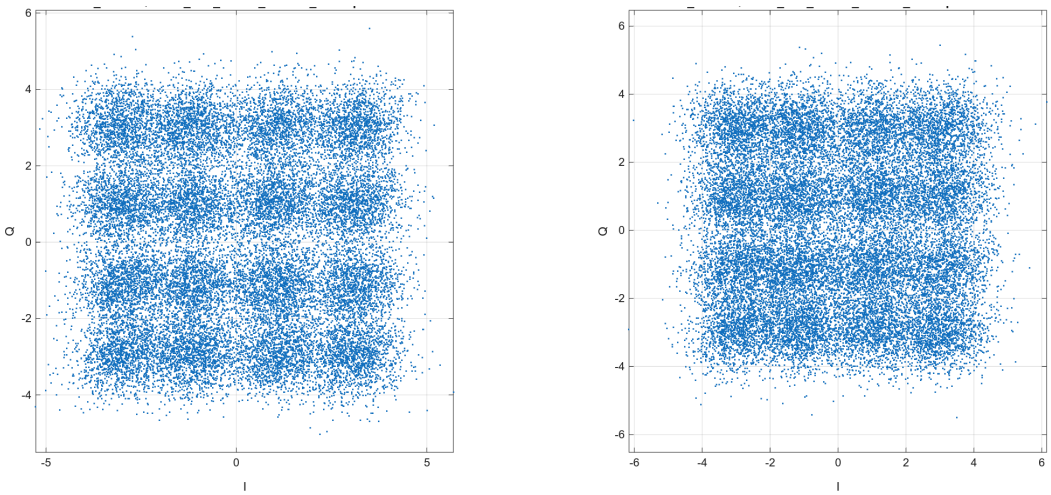

Representative BER: 0.047094 | configuration mean: 0.044836
Accepted / total captures: 8 / 10 | ID: cfg_c171c320ffc685681fed

Constellations | configurations 207-208

16QAM | 640 km | 5 dBm | wss offset 20GHz

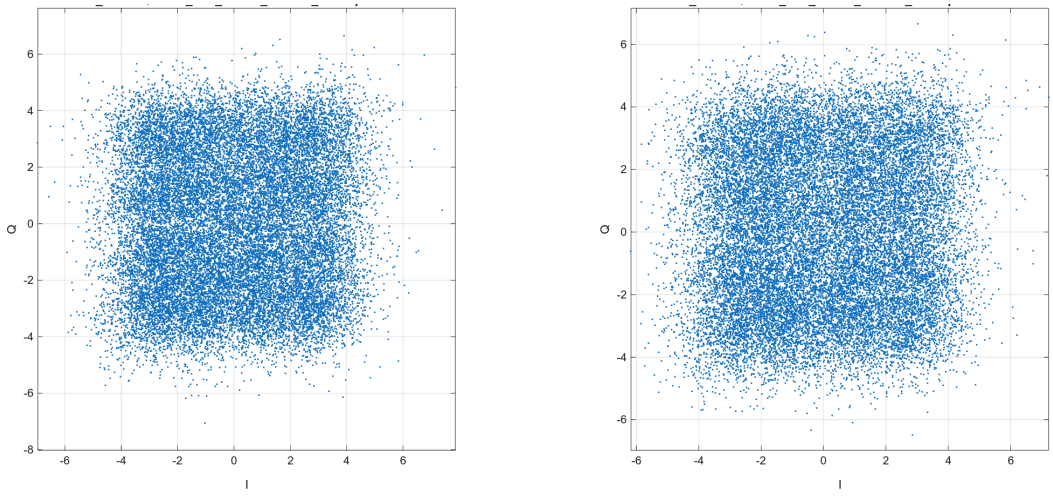

Representative BER: 0.10603 | configuration mean: 0.10574
Accepted / total captures: 10 / 10 | ID: cfg_076827a84ade8c59c777

16QAM | 640 km | 5 dBm | wss offset 24GHz

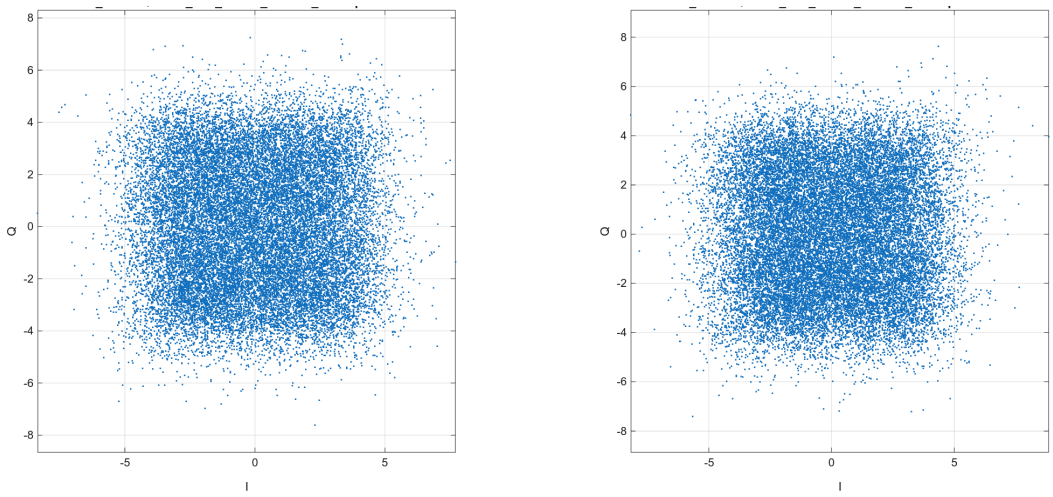

Representative BER: 0.15009 | configuration mean: 0.15016
Accepted / total captures: 10 / 10 | ID: cfg_9bbd3c9af5252fd1d5f0

Constellations | configurations 209-210

16QAM | 640 km | 5 dBm | wss bandwidth 55GHz

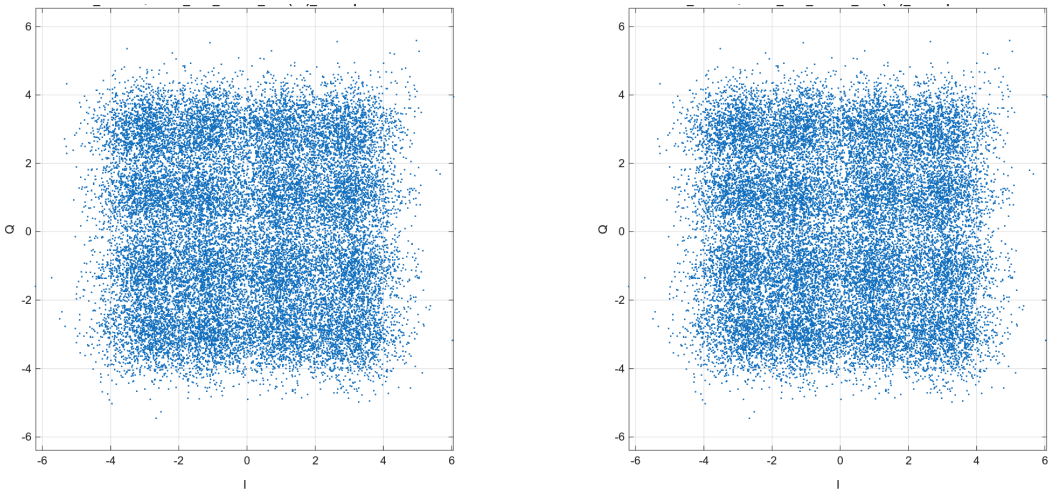

Representative BER: 0.062114 | configuration mean: 0.062543
Accepted / total captures: 7 / 11 | ID: cfg_faef48f02cd7ff66c0e8

16QAM | 640 km | 5 dBm | wss bandwidth 60GHz

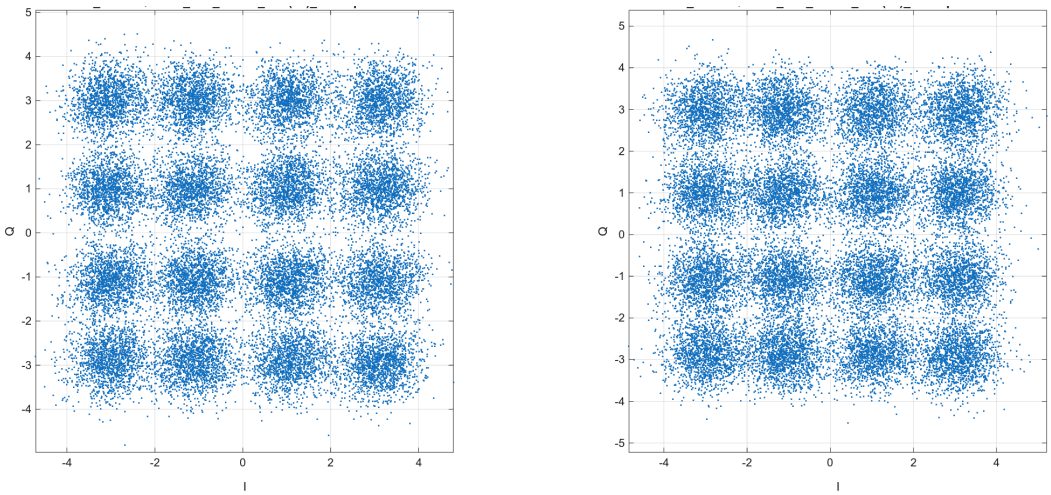

Representative BER: 0.013387 | configuration mean: 0.013177
Accepted / total captures: 6 / 10 | ID: cfg_a45abab1a4b68b21350b

Constellations | configurations 211-212

16QAM | 640 km | 5 dBm | wss bandwidth 65GHz

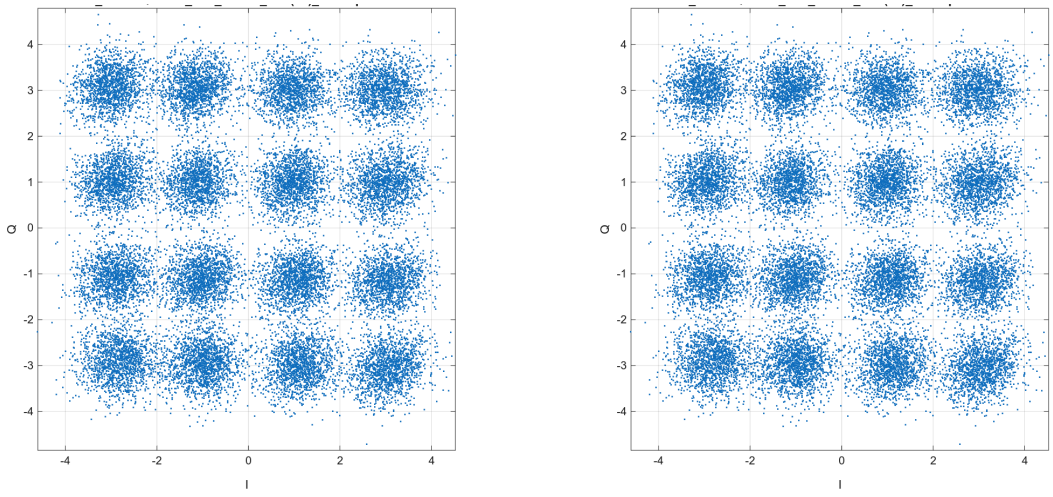

Representative BER: 0.0057177 | configuration mean: 0.005572
Accepted / total captures: 6 / 10 | ID: cfg_eb75f7c440153b11d9cb

16QAM | 640 km | 5 dBm | wss bandwidth 70GHz

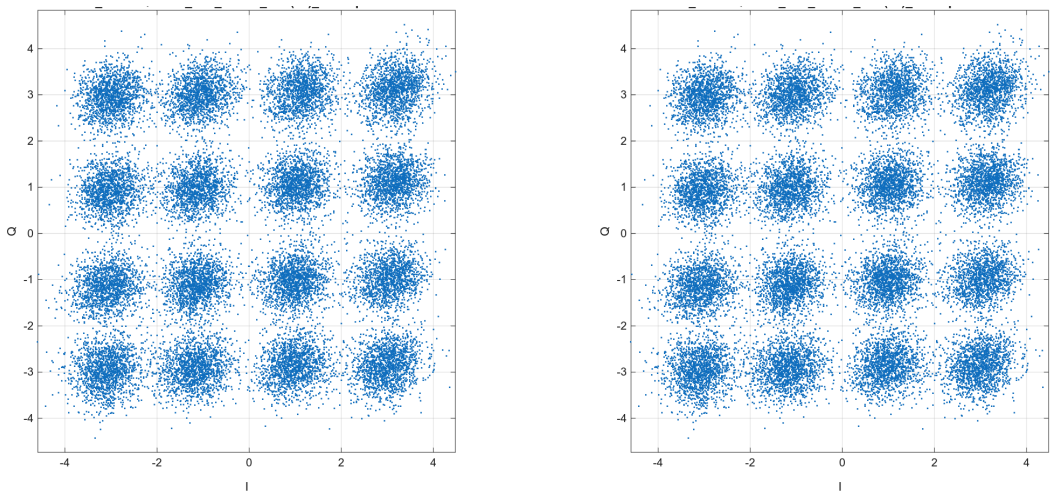

Representative BER: 0.0049823 | configuration mean: 0.0049757
Accepted / total captures: 7 / 10 | ID: cfg_658e2889cfe1146d605c

Constellations | configurations 213-214

16QAM | 640 km | 5 dBm | Normal (75 GHz)

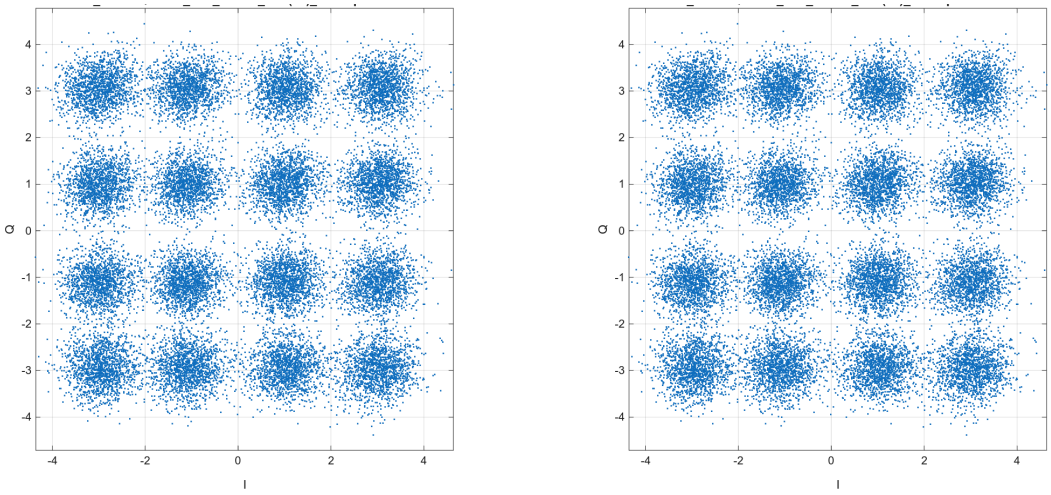

Representative BER: 0.0041695 | configuration mean: 0.0043118
Accepted / total captures: 22 / 27 | ID: cfg_d721ebd8f64707ab22ce

16QAM | 960 km | 1 dBm | attenuation 3dB

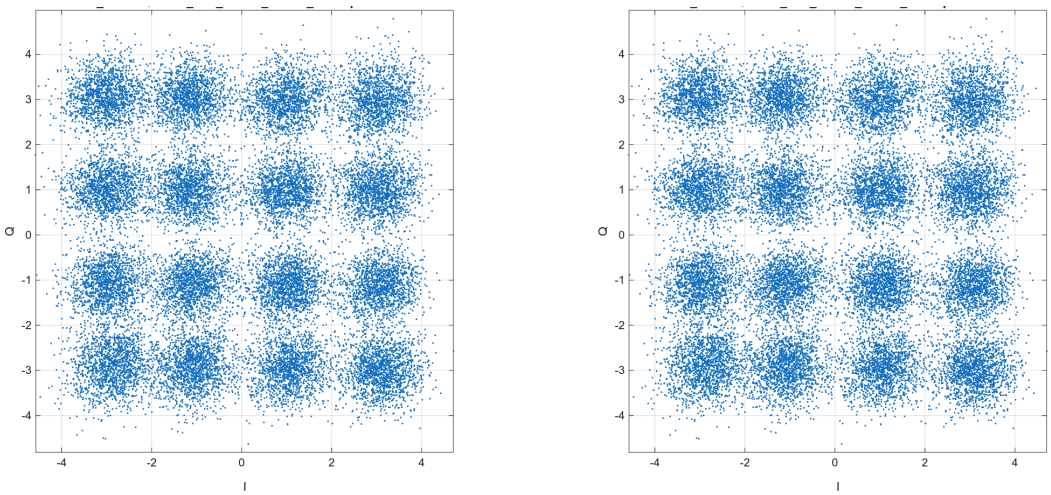

Representative BER: 0.0086195 | configuration mean: 0.0083057
Accepted / total captures: 10 / 10 | ID: cfg_9b8b1b402953418b3d3e

Constellations | configurations 215-216

16QAM | 960 km | 1 dBm | attenuation 5dB

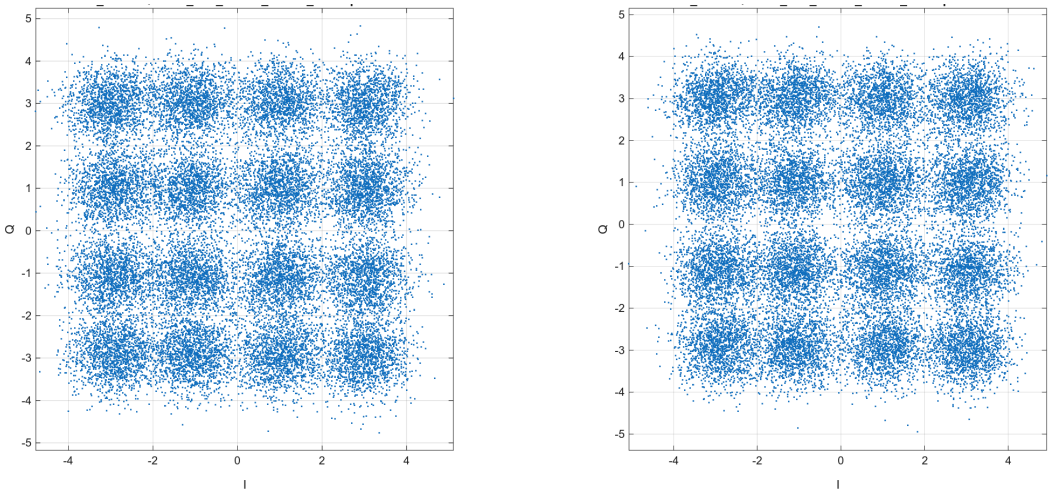

Representative BER: 0.019717 | configuration mean: 0.019681
Accepted / total captures: 6 / 10 | ID: cfg_974526df5599fbebbadb

16QAM | 960 km | 1 dBm | edfa 1dB

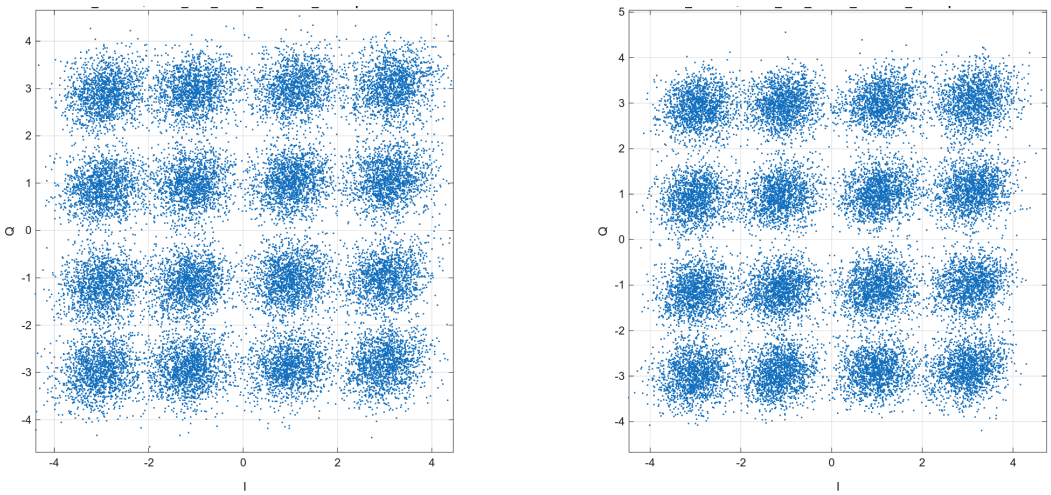

Representative BER: 0.0055918 | configuration mean: 0.0055949
Accepted / total captures: 7 / 10 | ID: cfg_82a9aedcda45d1ebf9ee

Constellations | configurations 217-218

16QAM | 960 km | 1 dBm | edfa 3dB

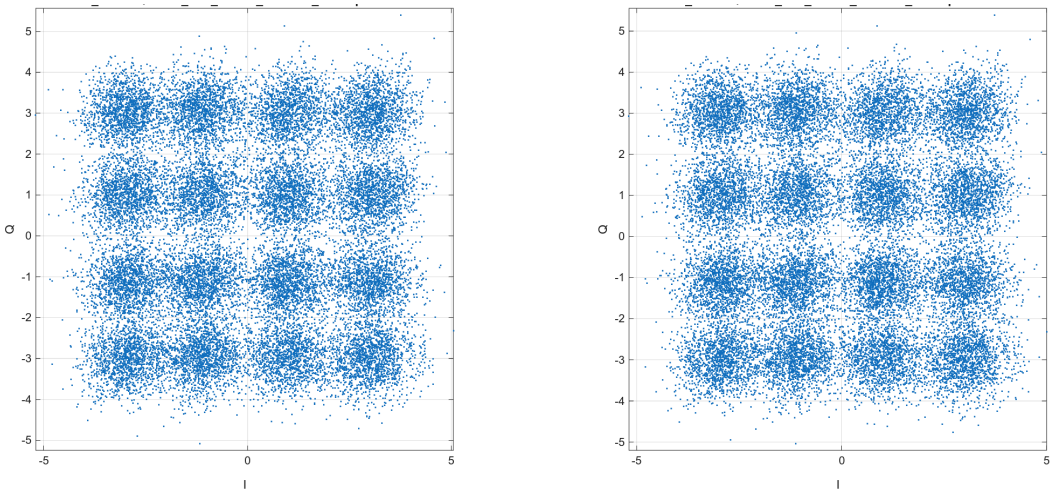

Representative BER: 0.020139 | configuration mean: 0.019877
Accepted / total captures: 7 / 10 | ID: cfg_e961c7ec313e4b5b93ff

16QAM | 960 km | 1 dBm | edfa 5dB

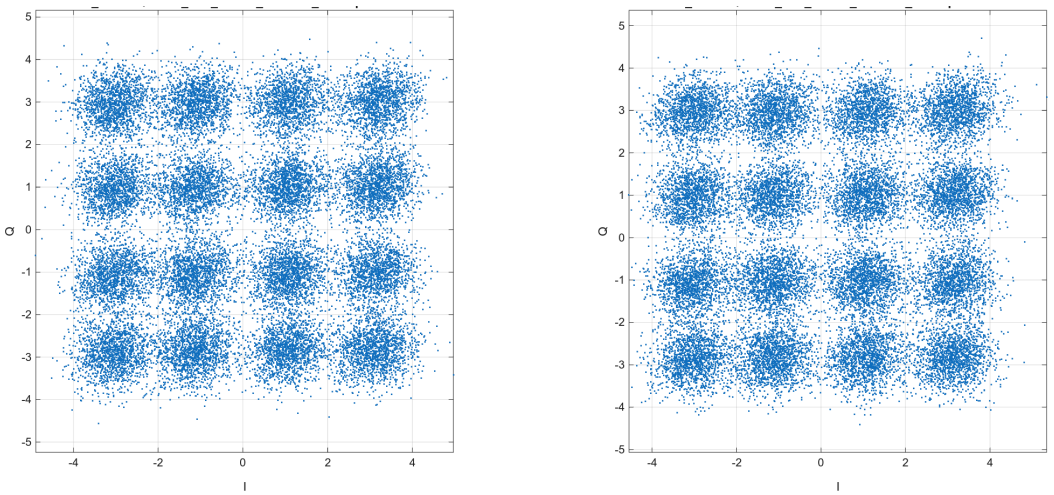

Representative BER: 0.012749 | configuration mean: 0.013289
Accepted / total captures: 6 / 10 | ID: cfg_5aecafec51f8abc37550

Constellations | configurations 219-220

16QAM | 960 km | 1 dBm | edfa 9dB

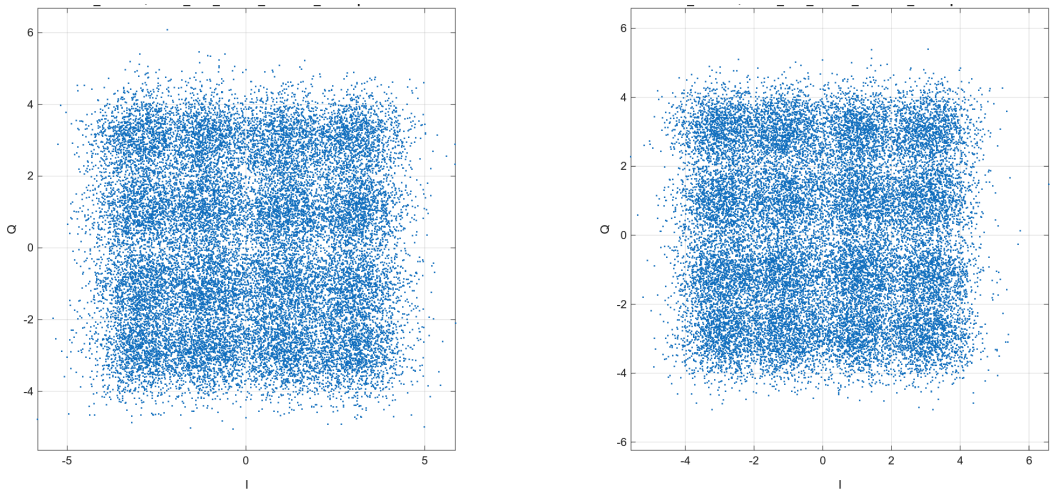

Representative BER: 0.0524 | configuration mean: 0.053527
Accepted / total captures: 7 / 10 | ID: cfg_dc2c4a319f4585a88710

16QAM | 960 km | 1 dBm | wss offset 4GHz

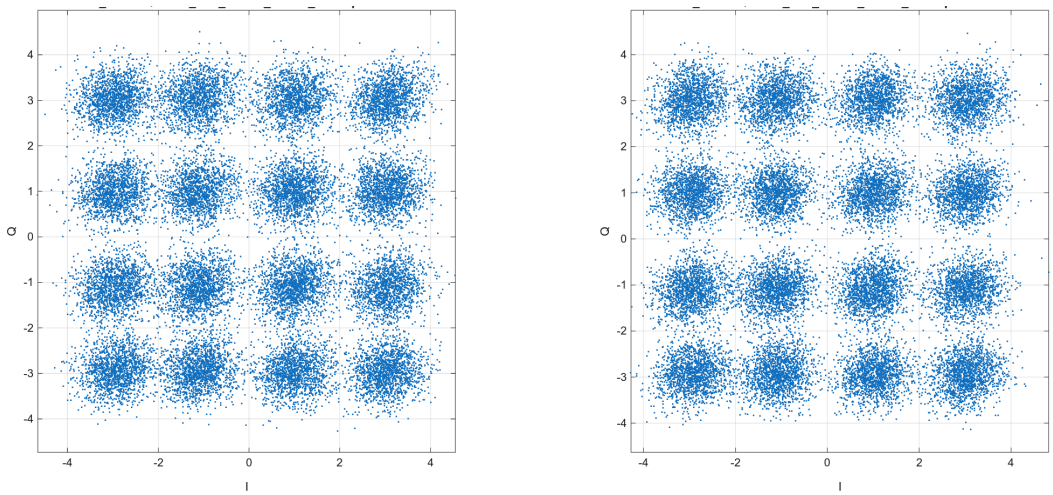

Representative BER: 0.0053858 | configuration mean: 0.0055591
Accepted / total captures: 6 / 10 | ID: cfg_f92e98c0b0154195a18e

Constellations | configurations 221-222

16QAM | 960 km | 1 dBm | wss offset 8GHz

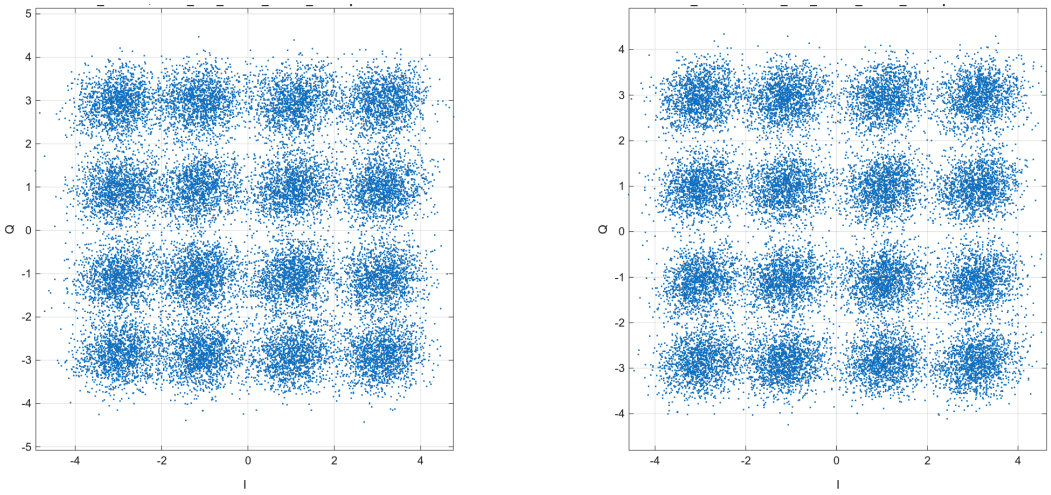

Representative BER: 0.0099931 | configuration mean: 0.0098598
Accepted / total captures: 6 / 10 | ID: cfg_cb0cca875a94dae45af1

16QAM | 960 km | 1 dBm | wss offset 12GHz

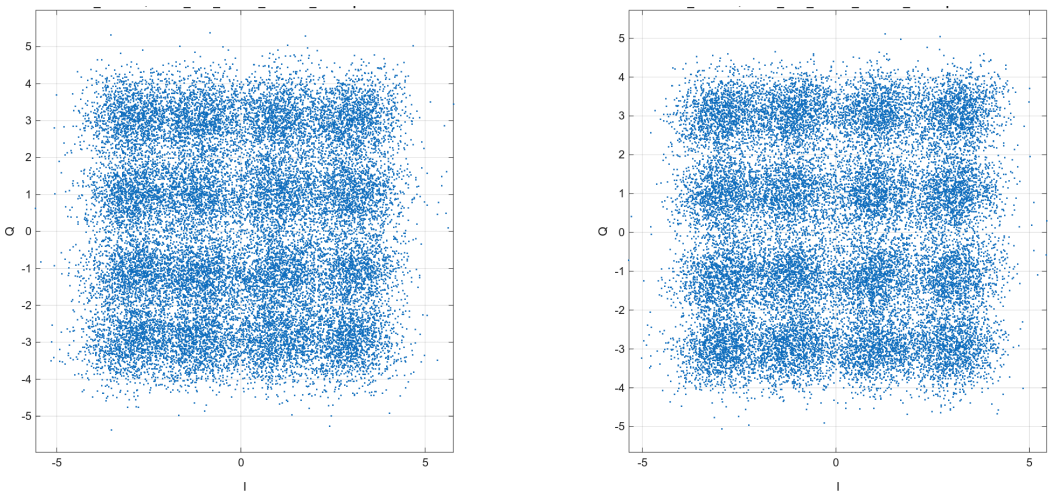

Representative BER: 0.041017 | configuration mean: 0.040509
Accepted / total captures: 6 / 10 | ID: cfg_3fc67ce653720bd2c035

Constellations | configurations 223-224

16QAM | 960 km | 1 dBm | wss offset 16GHz

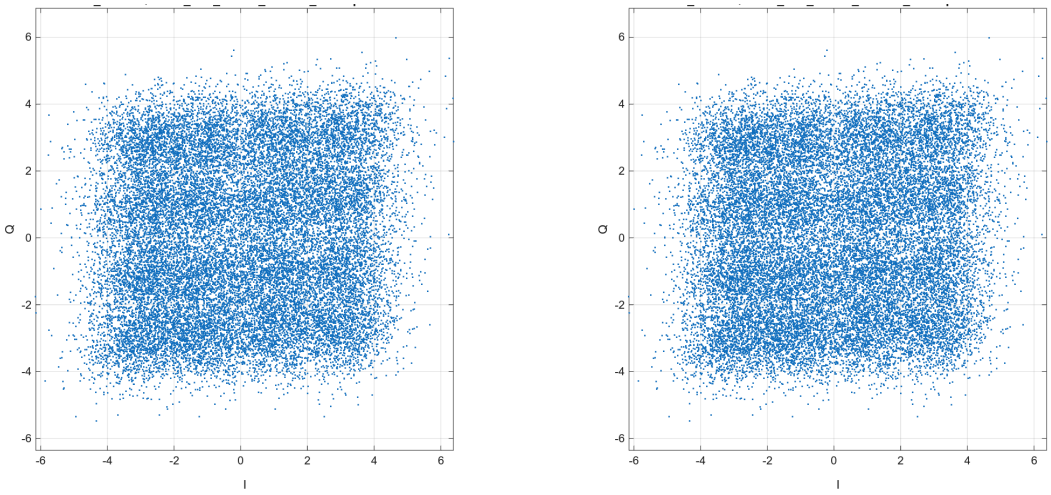

Representative BER: 0.082755 | configuration mean: 0.082904
Accepted / total captures: 8 / 10 | ID: cfg_23085632f4f9d0770824

16QAM | 960 km | 1 dBm | wss offset 20GHz

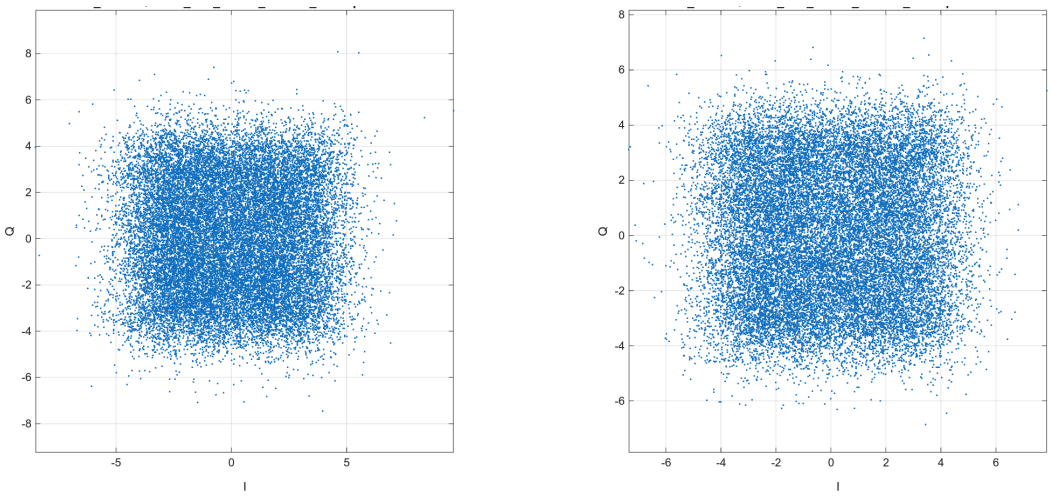

Representative BER: 0.13613 | configuration mean: 0.13606
Accepted / total captures: 10 / 10 | ID: cfg_23888b9e62957a78f74b

Constellations | configurations 225-226

16QAM | 960 km | 1 dBm | wss offset 24GHz

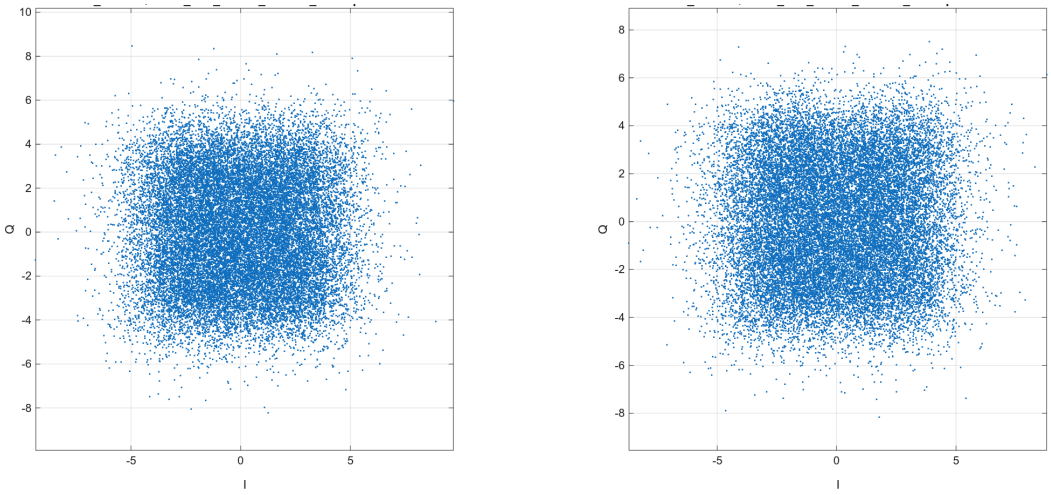

Representative BER: 0.17358 | configuration mean: 0.1734
Accepted / total captures: 10 / 10 | ID: cfg_89a4ec26d13d0b6c4456

16QAM | 960 km | 1 dBm | wss bandwidth 55GHz

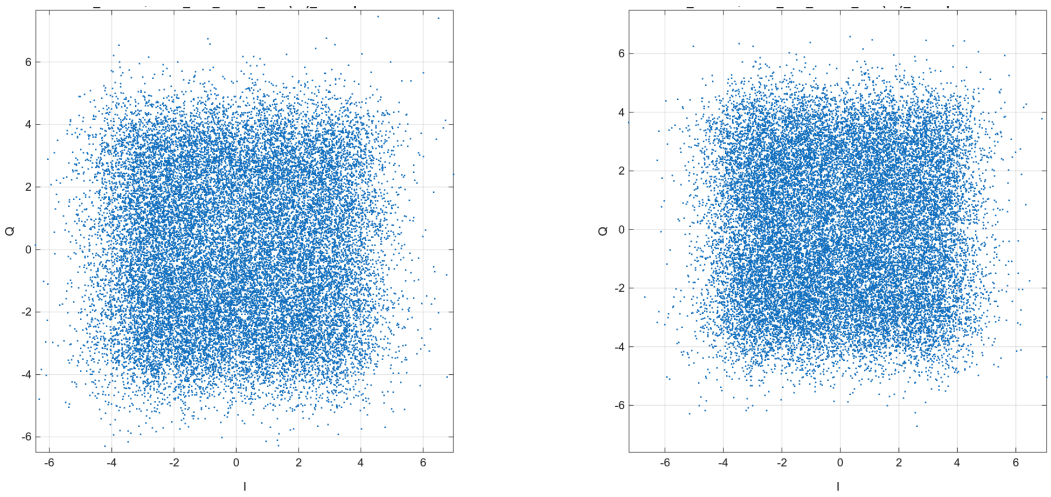

Representative BER: 0.12012 | configuration mean: 0.12007
Accepted / total captures: 10 / 10 | ID: cfg_9aad7c53c95f752f4744

Constellations | configurations 227-228

16QAM | 960 km | 1 dBm | wss bandwidth 60GHz

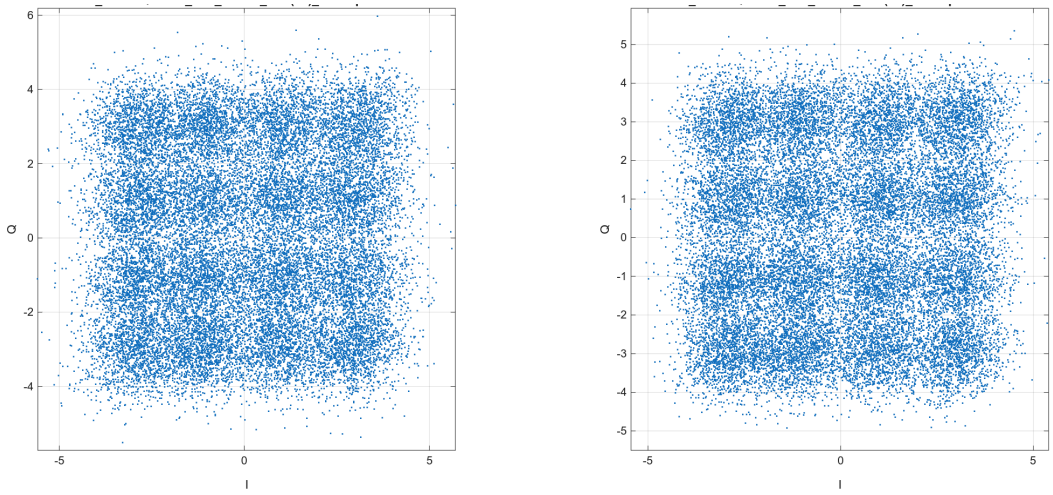

Representative BER: 0.053732 | configuration mean: 0.054164
Accepted / total captures: 10 / 10 | ID: cfg_7c5c5527f20ee0269b1d

16QAM | 960 km | 1 dBm | wss bandwidth 65GHz

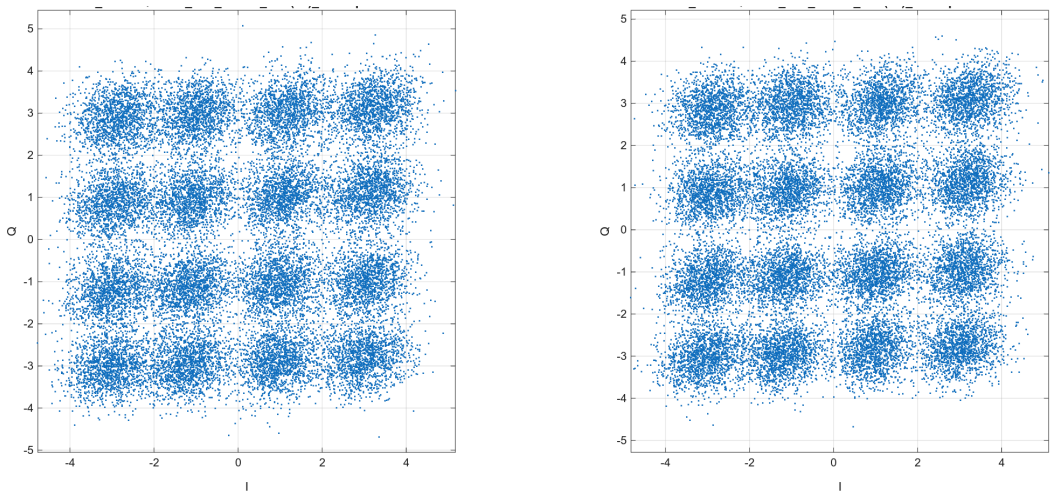

Representative BER: 0.017678 | configuration mean: 0.017823
Accepted / total captures: 7 / 10 | ID: cfg_8cafb51d671d9c0084f1

Constellations | configurations 229-230

16QAM | 960 km | 1 dBm | wss bandwidth 70GHz

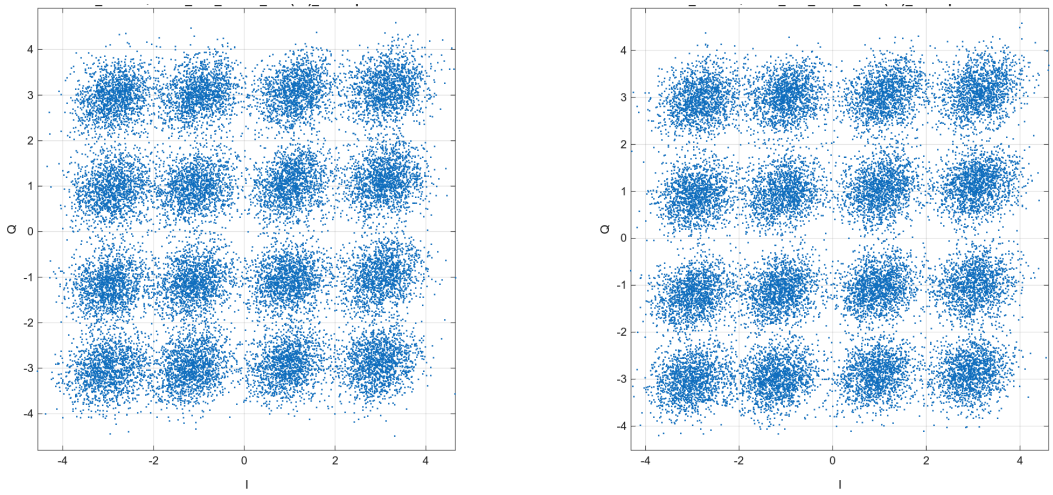

Representative BER: 0.0089286 | configuration mean: 0.0087909
Accepted / total captures: 10 / 10 | ID: cfg_c87528f779a64642633c

16QAM | 960 km | 1 dBm | Normal (75 GHz)

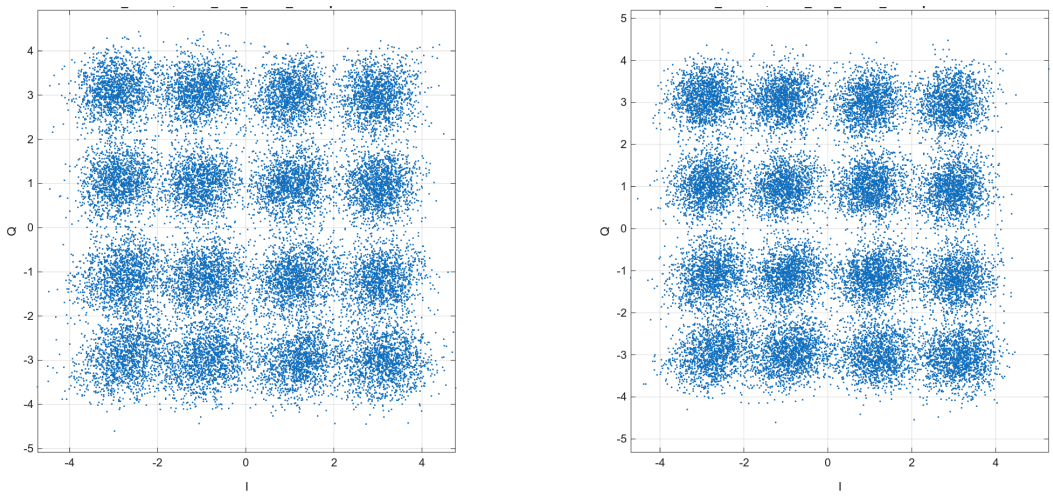

Representative BER: 0.0090874 | configuration mean: 0.0089231
Accepted / total captures: 25 / 26 | ID: cfg_112e4b0d94988eb05103

Constellations | configurations 231-232

16QAM | 960 km | 3 dBm | attenuation 3dB

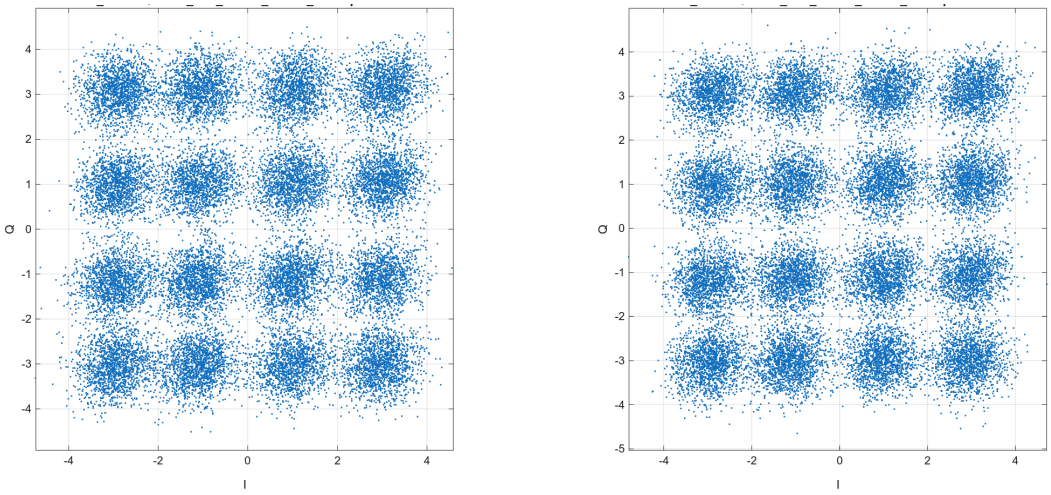

Representative BER: 0.0080844 | configuration mean: 0.0078383
Accepted / total captures: 10 / 10 | ID: cfg_448fb487ad832c63e0fa

16QAM | 960 km | 3 dBm | attenuation 5dB

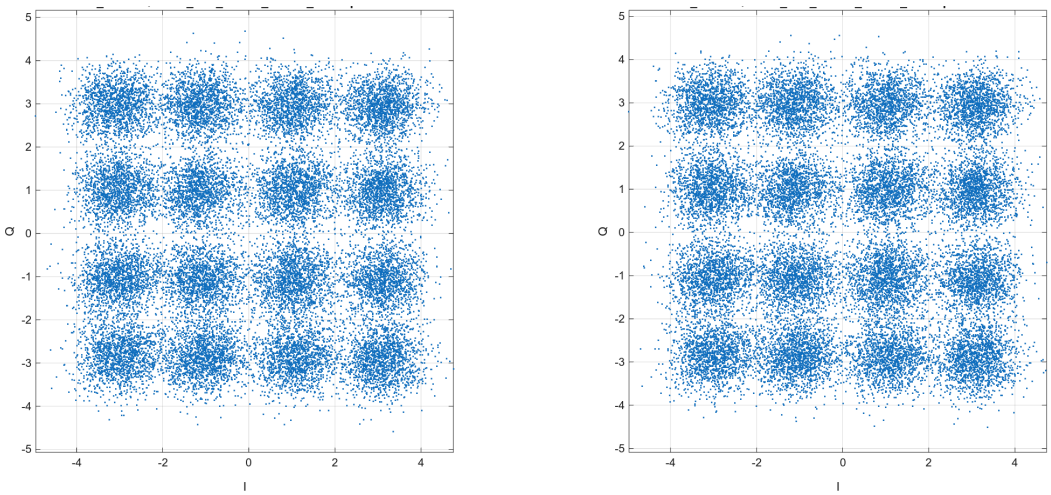

Representative BER: 0.012036 | configuration mean: 0.012194
Accepted / total captures: 10 / 10 | ID: cfg_8fc5408f53714ea292bc

Constellations | configurations 233-234

16QAM | 960 km | 3 dBm | edfa 1dB

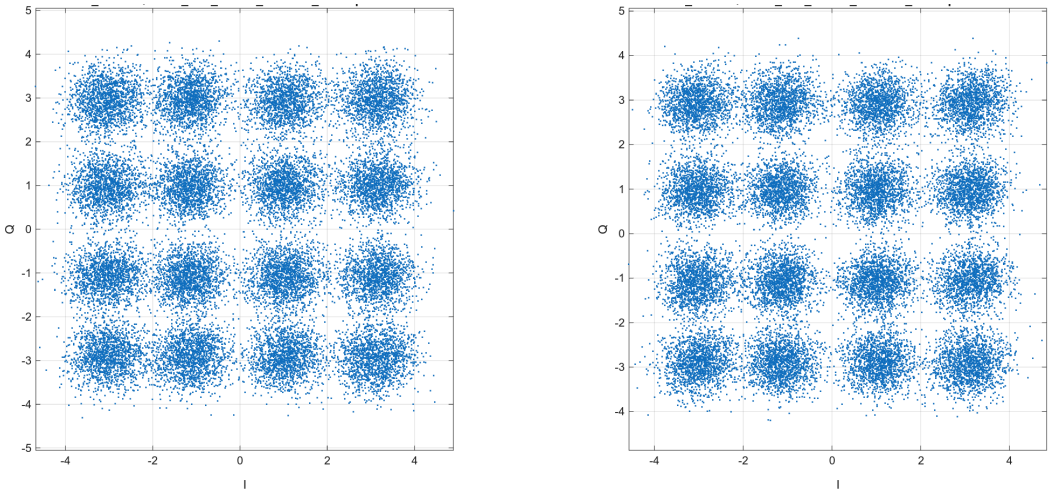

Representative BER: 0.0061942 | configuration mean: 0.0057429
Accepted / total captures: 5 / 10 | ID: cfg_c6ff62250420cd03acf3

16QAM | 960 km | 3 dBm | edfa 3dB

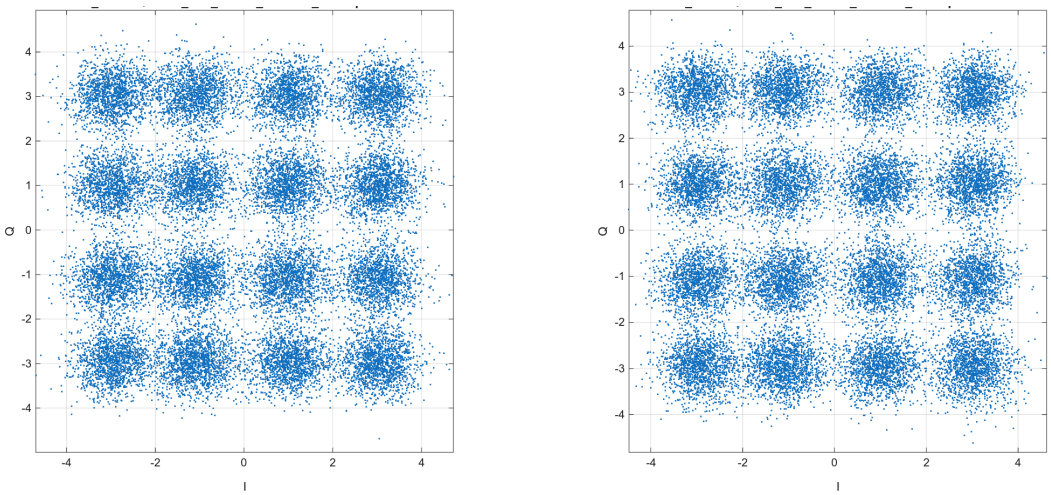

Representative BER: 0.0076952 | configuration mean: 0.0083875
Accepted / total captures: 9 / 10 | ID: cfg_6b7540f0e65f698f9ab0

Constellations | configurations 235-236

16QAM | 960 km | 3 dBm | edfa 5dB

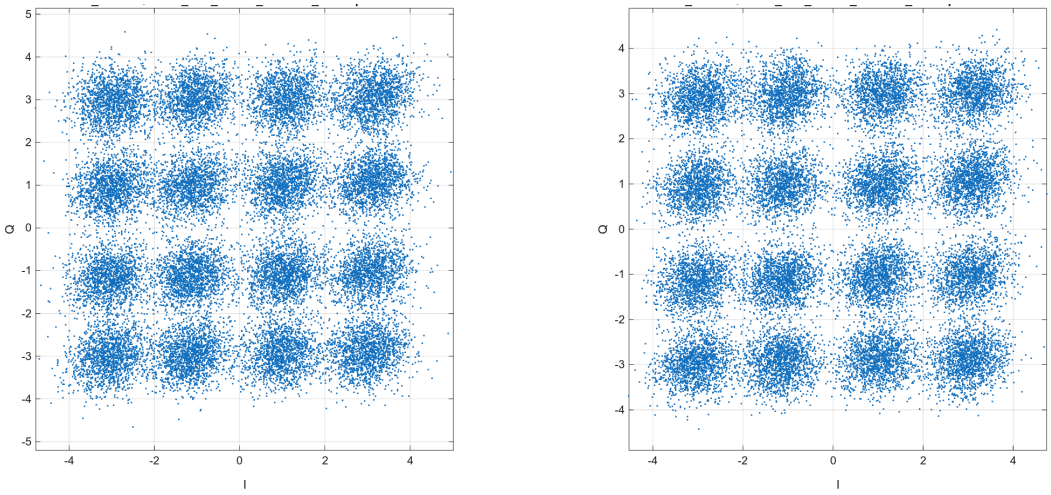

Representative BER: 0.0090745 | configuration mean: 0.0085281
Accepted / total captures: 10 / 10 | ID: cfg_ec7e7bdd78331b904581

16QAM | 960 km | 3 dBm | edfa 9dB

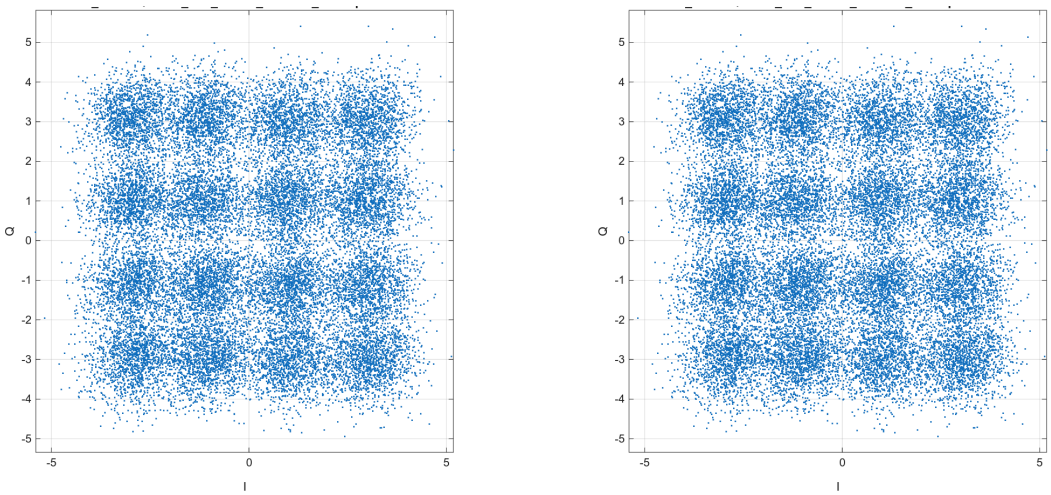

Representative BER: 0.031342 | configuration mean: 0.031339
Accepted / total captures: 10 / 10 | ID: cfg_42878604a902fab95b1f

Constellations | configurations 237-238

16QAM | 960 km | 3 dBm | wss offset 4GHz

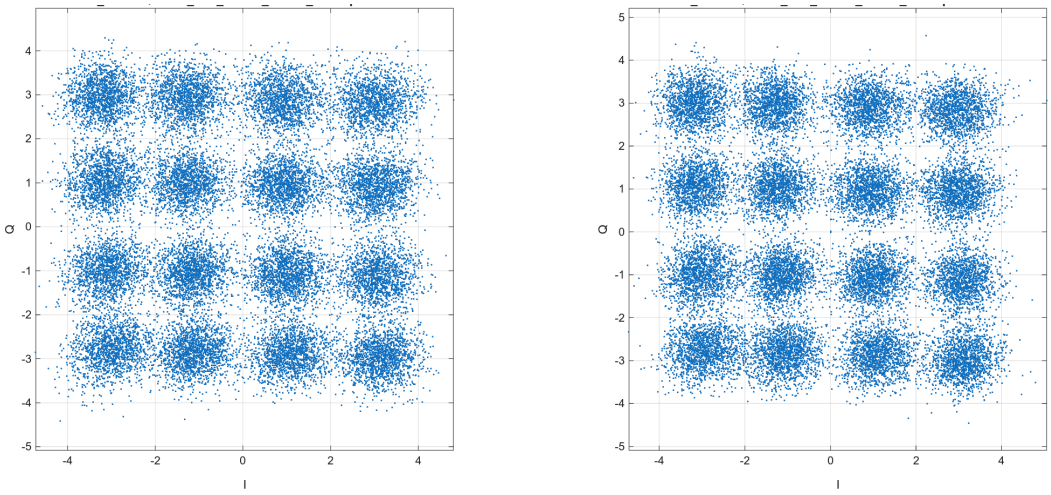

Representative BER: 0.0084793 | configuration mean: 0.0079635
Accepted / total captures: 9 / 10 | ID: cfg_67be78fcfff75f5543b4

16QAM | 960 km | 3 dBm | wss offset 8GHz

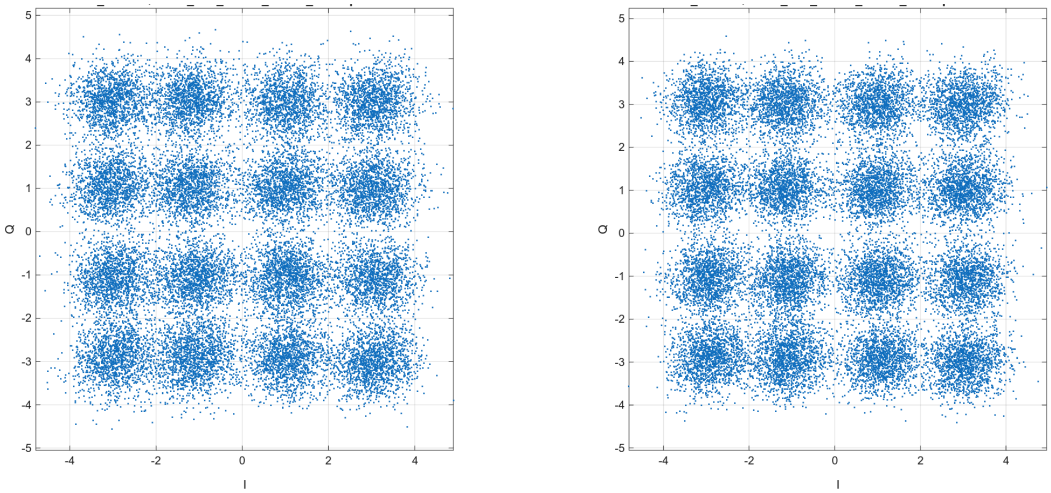

Representative BER: 0.012258 | configuration mean: 0.013086
Accepted / total captures: 10 / 10 | ID: cfg_7900990dc4d44a72be25

Constellations | configurations 239-240

16QAM | 960 km | 3 dBm | wss offset 12GHz

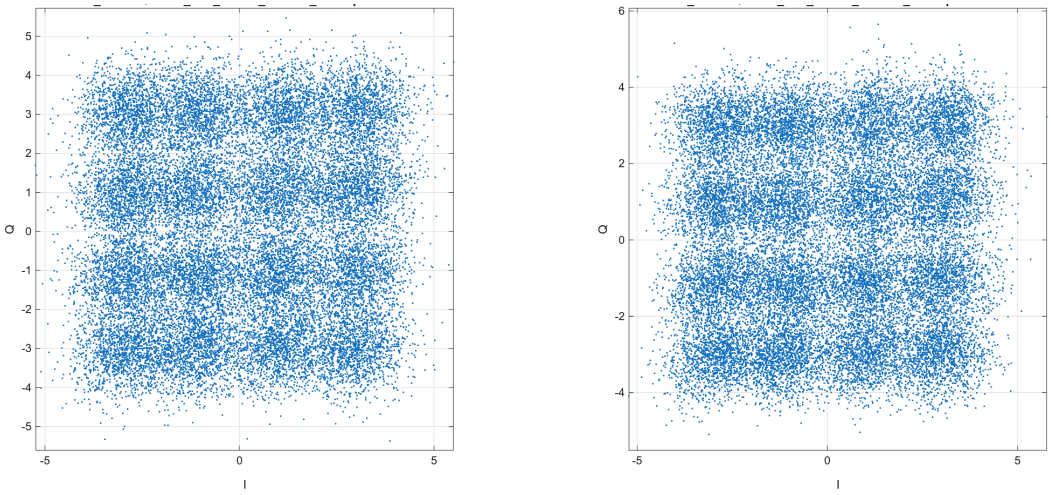

Representative BER: 0.046818 | configuration mean: 0.046758
Accepted / total captures: 10 / 10 | ID: cfg_cc48f7fe495326659a61

16QAM | 960 km | 3 dBm | wss offset 16GHz

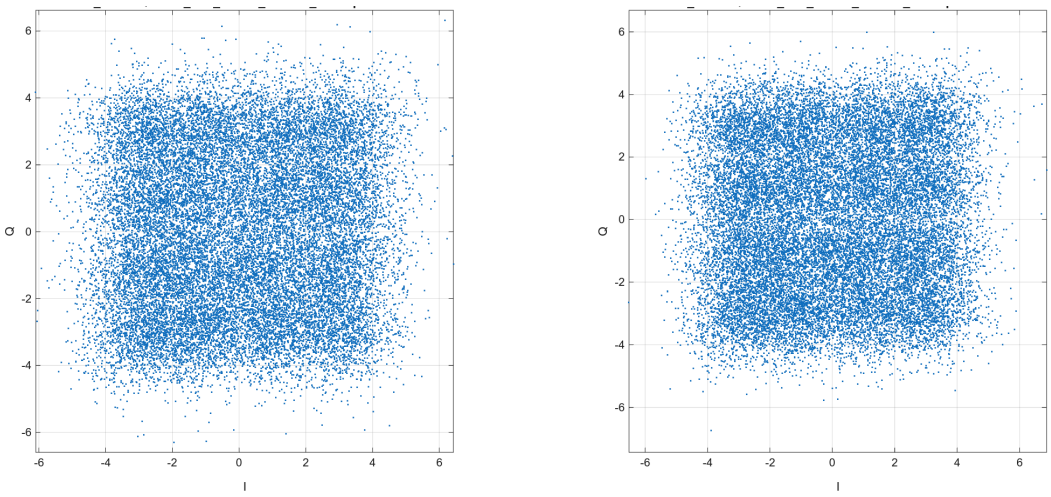

Representative BER: 0.092259 | configuration mean: 0.091907
Accepted / total captures: 10 / 10 | ID: cfg_b38c1b6da85ce46c3416

Constellations | configurations 241-242

16QAM | 960 km | 3 dBm | wss offset 20GHz

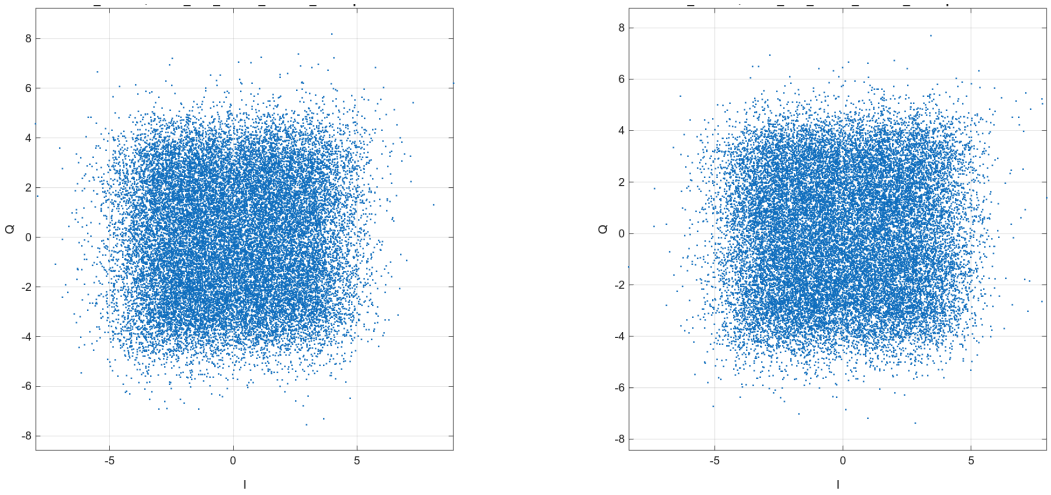

Representative BER: 0.14181 | configuration mean: 0.14212
Accepted / total captures: 10 / 10 | ID: cfg_30d985a0b8bbba1d14f4

16QAM | 960 km | 3 dBm | wss offset 24GHz

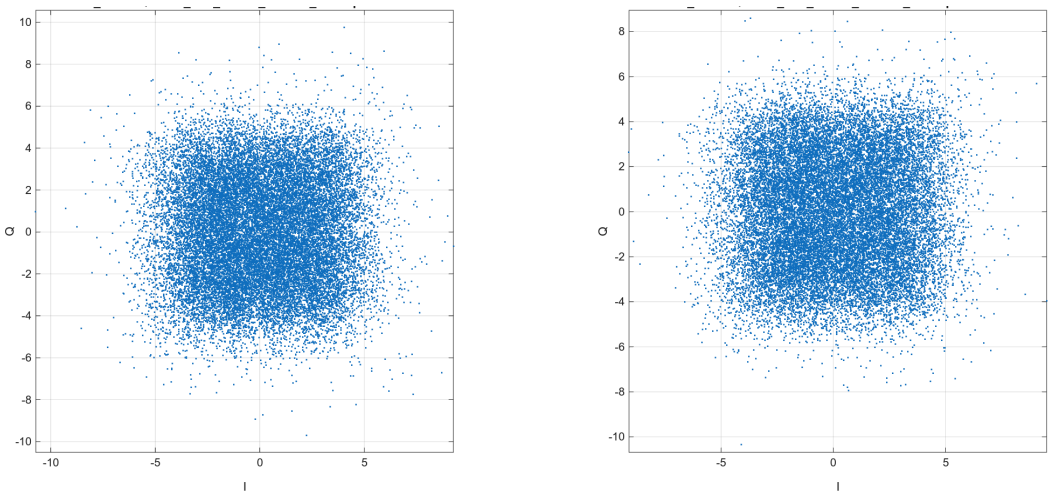

Representative BER: 0.17806 | configuration mean: 0.178
Accepted / total captures: 8 / 10 | ID: cfg_24e39b897cc0ebd9660e

Constellations | configurations 243-244

16QAM | 960 km | 3 dBm | wss bandwidth 55GHz

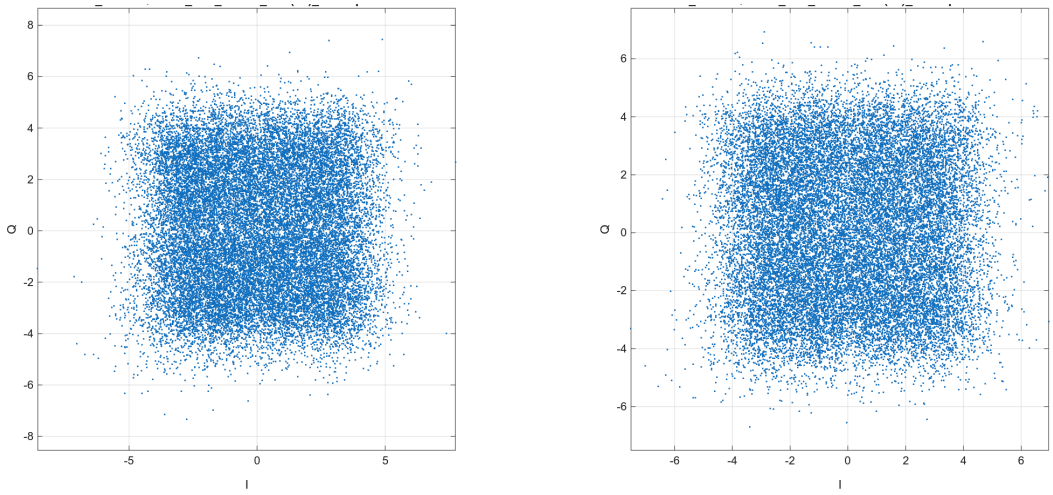

Representative BER: 0.12401 | configuration mean: 0.12412
Accepted / total captures: 10 / 10 | ID: cfg_b89e56f3c82daf62c53b

16QAM | 960 km | 3 dBm | wss bandwidth 60GHz

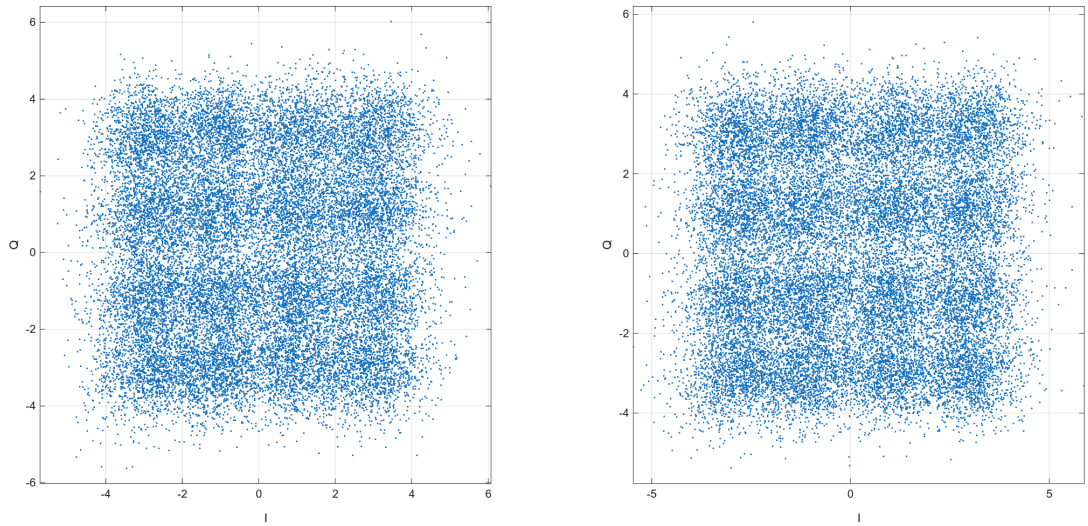

Representative BER: 0.057818 | configuration mean: 0.057918
Accepted / total captures: 10 / 10 | ID: cfg_4be211fbb64dc126c046

Constellations | configurations 245-246

16QAM | 960 km | 3 dBm | wss bandwidth 65GHz

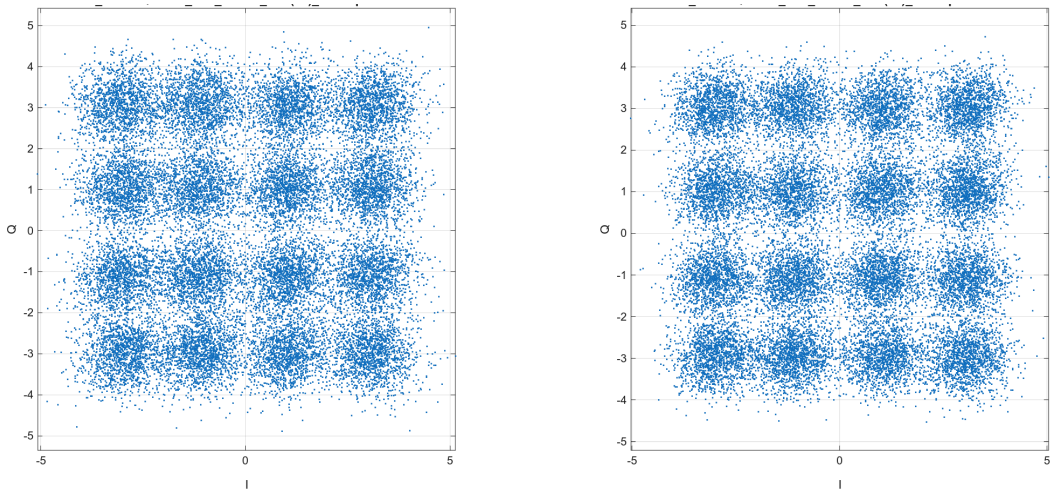

Representative BER: 0.017693 | configuration mean: 0.017742
Accepted / total captures: 10 / 10 | ID: cfg_b2d125dc2b8600281cdd

16QAM | 960 km | 3 dBm | wss bandwidth 70GHz

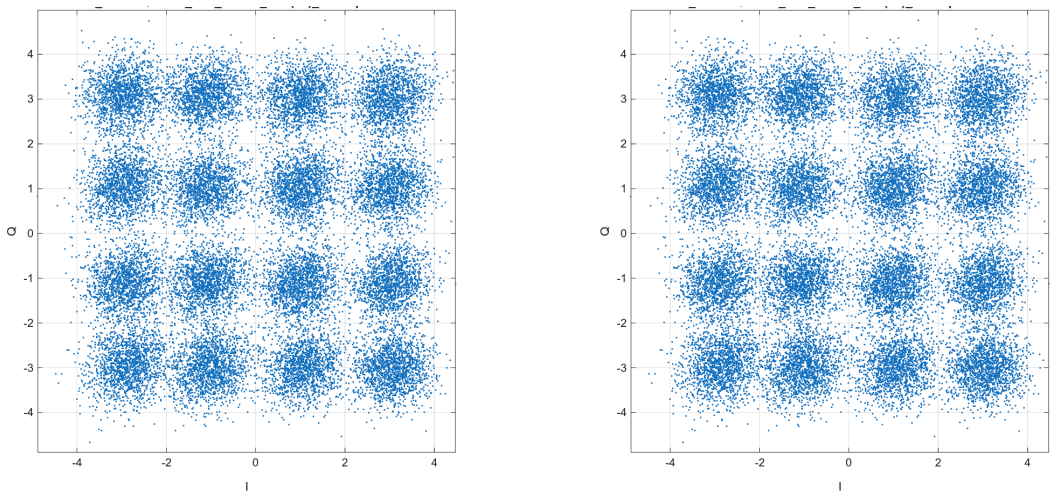

Representative BER: 0.0084535 | configuration mean: 0.008491
Accepted / total captures: 10 / 10 | ID: cfg_50eddb42d0c1e59434d0

Constellations | configurations 247-248

16QAM | 960 km | 3 dBm | Normal (75 GHz)

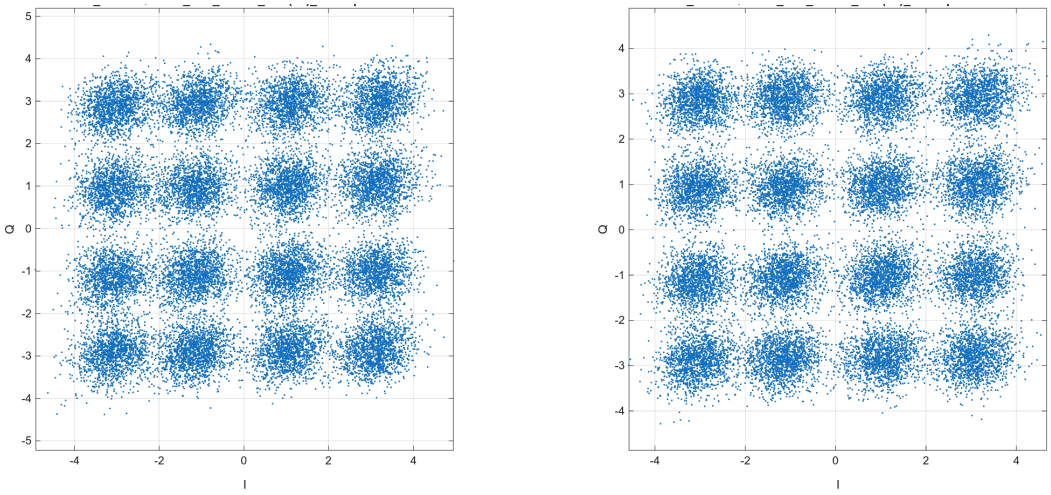

Representative BER: 0.006788 | configuration mean: 0.0065427
Accepted / total captures: 25 / 26 | ID: cfg_368db87ac471386623eb

16QAM | 960 km | 5 dBm | attenuation 3dB

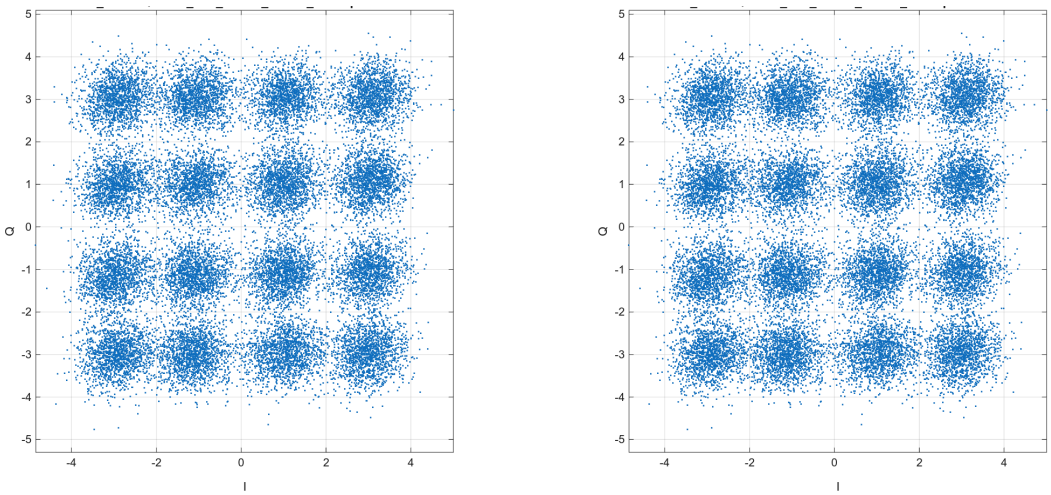

Representative BER: 0.0093922 | configuration mean: 0.009622
Accepted / total captures: 8 / 10 | ID: cfg_be530afe3288cfdc542c

Constellations | configurations 249-250

16QAM | 960 km | 5 dBm | attenuation 5dB

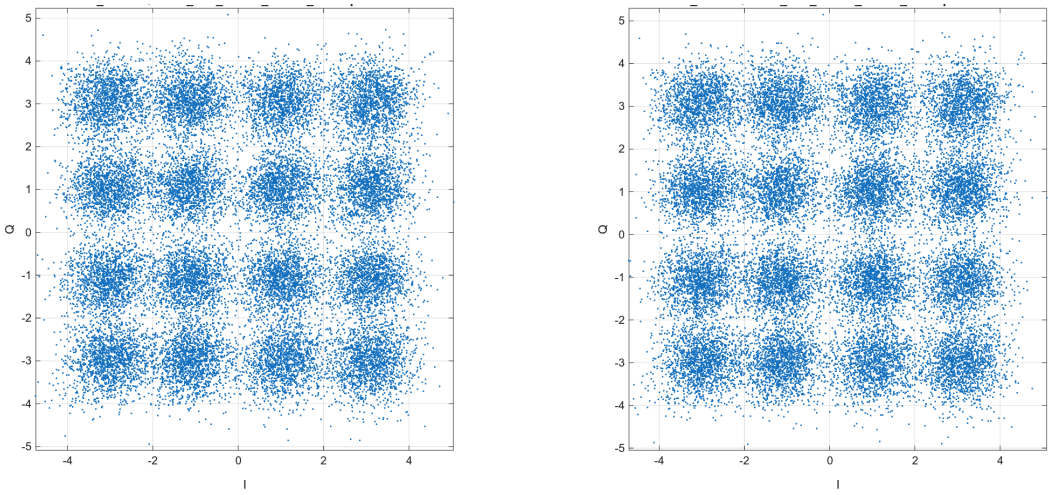

Representative BER: 0.012572 | configuration mean: 0.01261
Accepted / total captures: 10 / 11 | ID: cfg_d25cf9f894e1c4b19834

16QAM | 960 km | 5 dBm | edfa 1dB

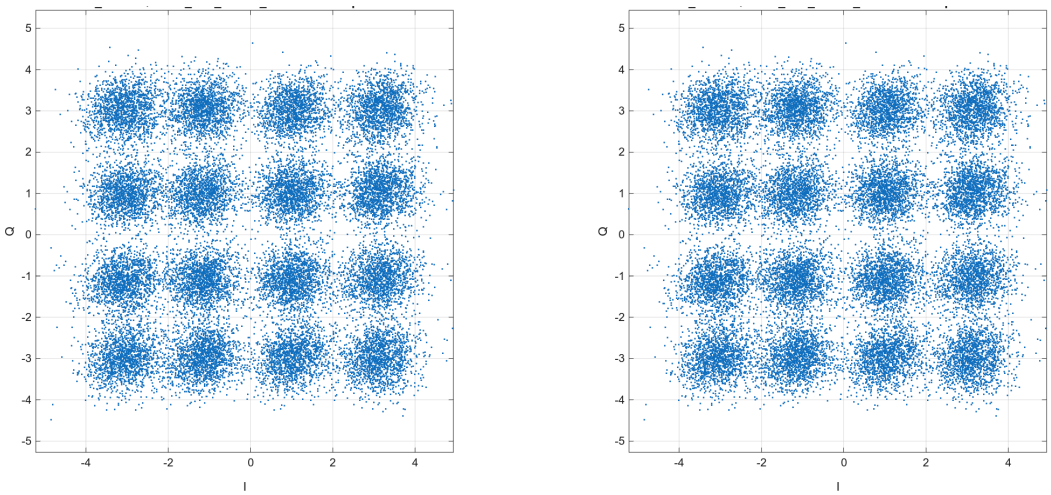

Representative BER: 0.0088255 | configuration mean: 0.0089905
Accepted / total captures: 8 / 10 | ID: cfg_683b44b7096fc137d689

Constellations | configurations 251-252

16QAM | 960 km | 5 dBm | edfa 3dB

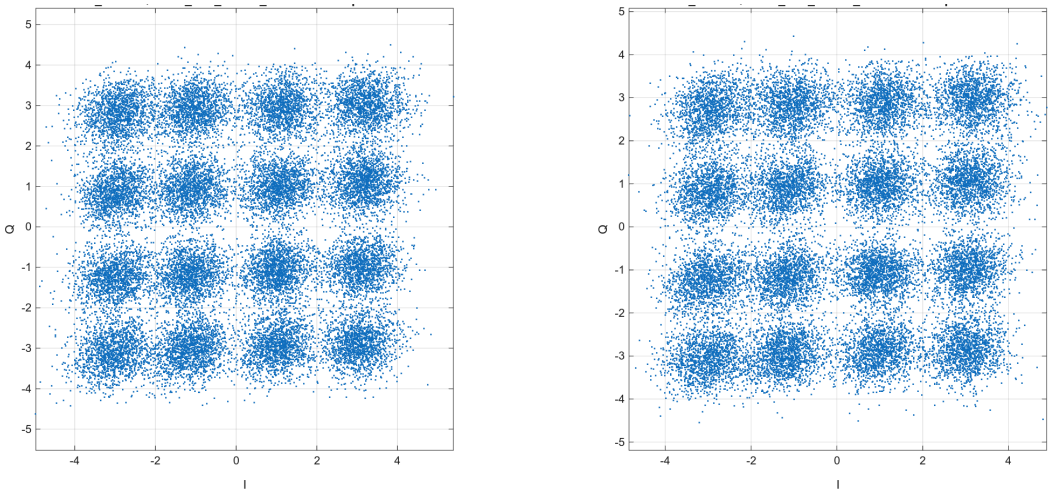

Representative BER: 0.012859 | configuration mean: 0.012871
Accepted / total captures: 9 / 10 | ID: cfg_be4ff43419276834c2ed

16QAM | 960 km | 5 dBm | edfa 5dB

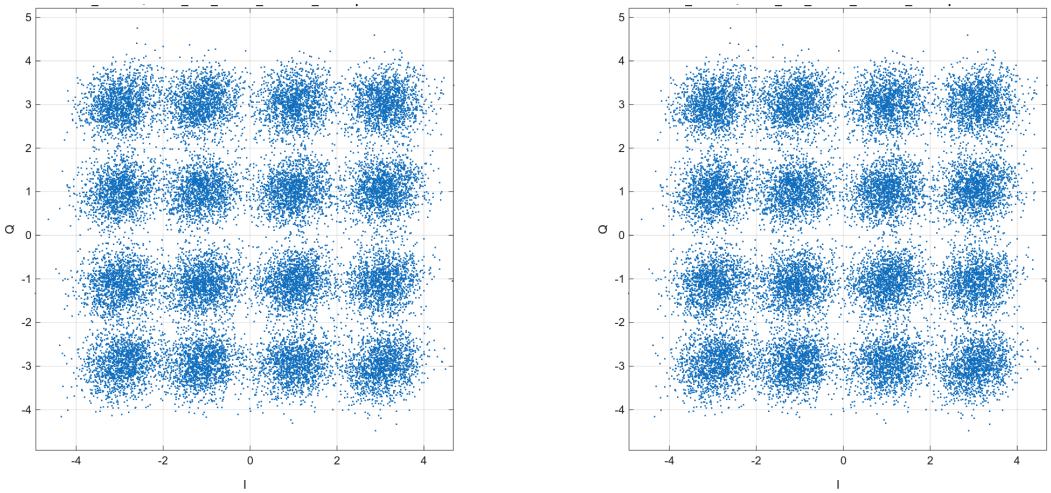

Representative BER: 0.0063244 | configuration mean: 0.0063367
Accepted / total captures: 7 / 10 | ID: cfg_5faea598f534901f52a9

Constellations | configurations 253-254

16QAM | 960 km | 5 dBm | edfa 9dB

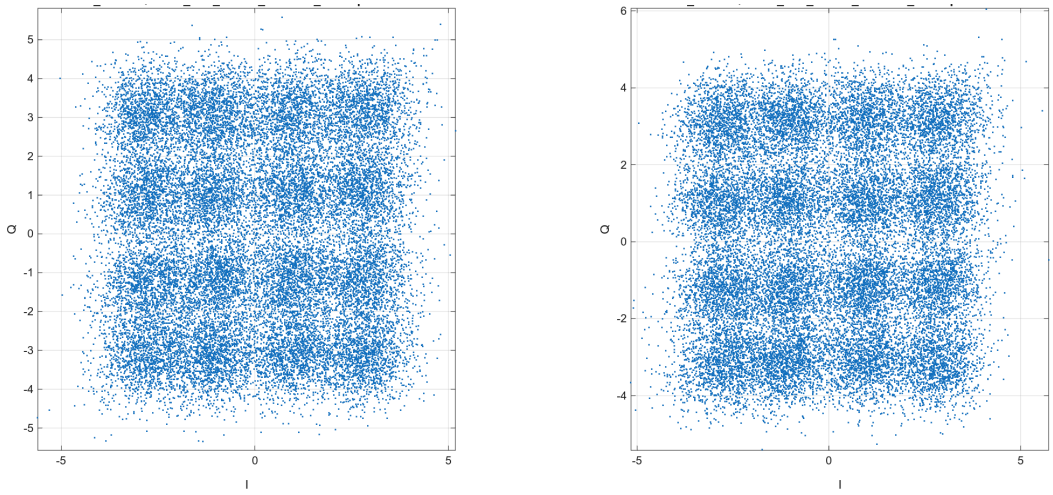

Representative BER: 0.041974 | configuration mean: 0.041068
Accepted / total captures: 7 / 10 | ID: cfg_cb715099446f4efe2d31

16QAM | 960 km | 5 dBm | wss offset 4GHz

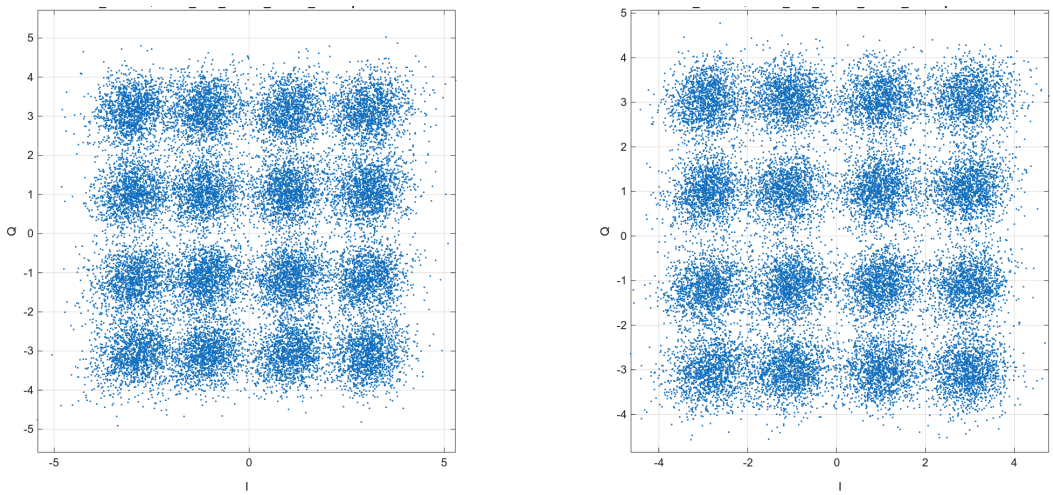

Representative BER: 0.011859 | configuration mean: 0.011775
Accepted / total captures: 11 / 11 | ID: cfg_a9c48444ecaa543e8faa

Constellations | configurations 255-256

16QAM | 960 km | 5 dBm | wss offset 8GHz

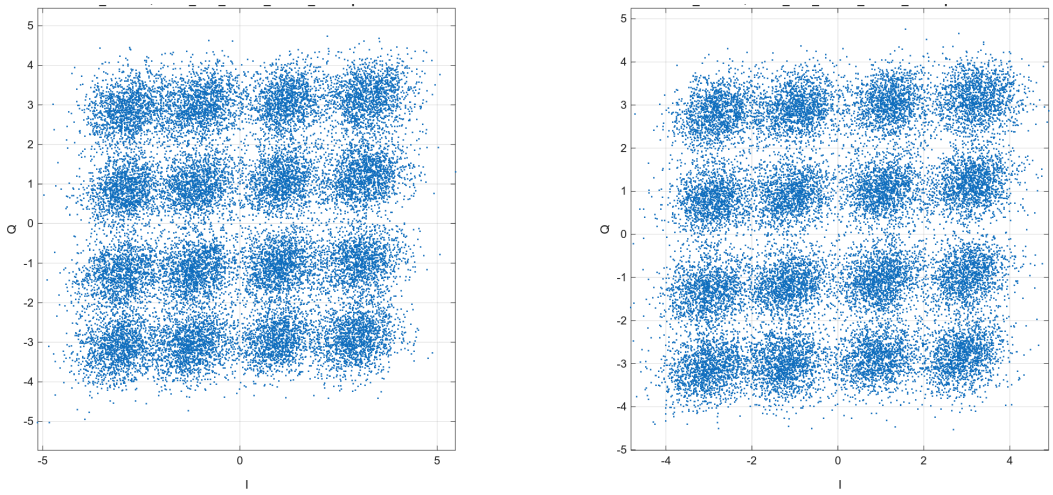

Representative BER: 0.016731 | configuration mean: 0.0159
Accepted / total captures: 10 / 10 | ID: cfg_ffc3f342ab8052e6d711

16QAM | 960 km | 5 dBm | wss offset 12GHz

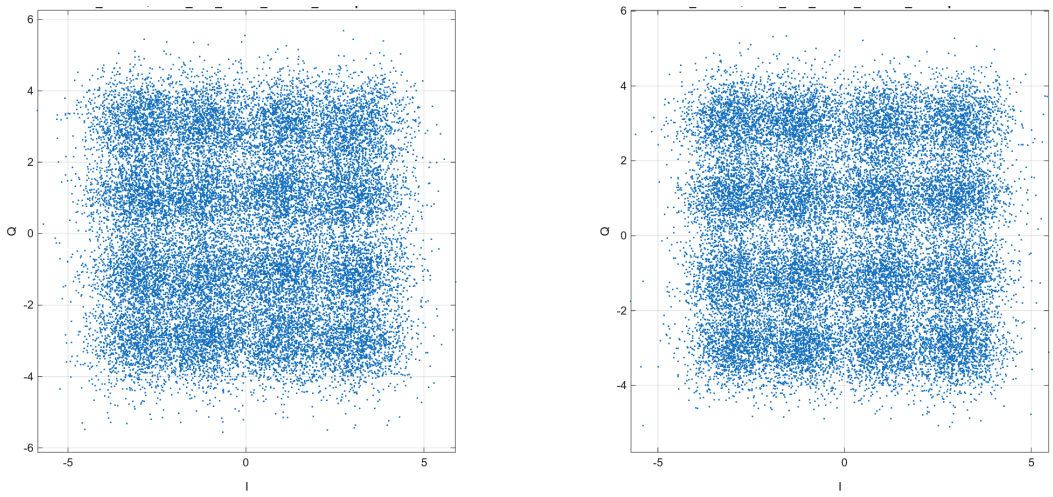

Representative BER: 0.047309 | configuration mean: 0.046798
Accepted / total captures: 10 / 10 | ID: cfg_4e4d91f619d5e3d0cdf6

Constellations | configurations 257-258

16QAM | 960 km | 5 dBm | wss offset 16GHz

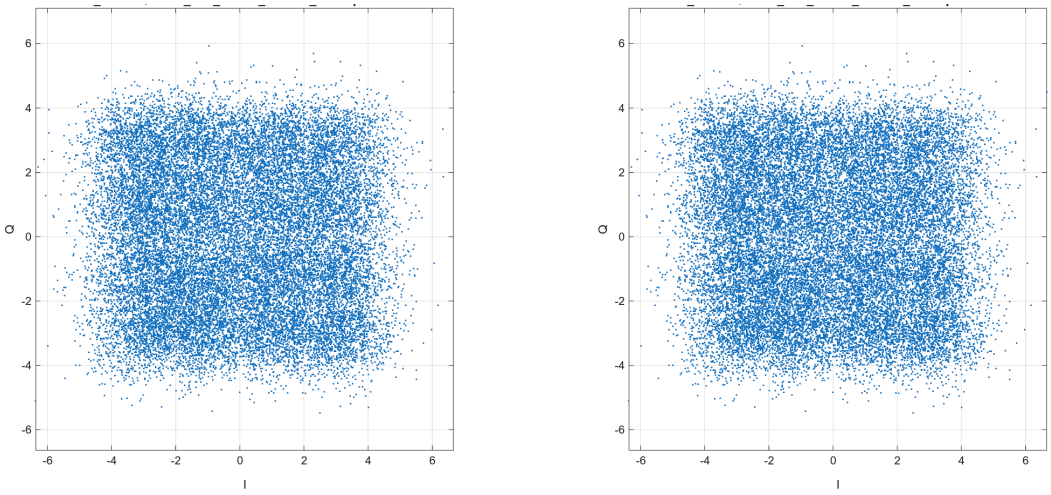

Representative BER: 0.091063 | configuration mean: 0.091045
Accepted / total captures: 10 / 10 | ID: cfg_a94252212806bd94eb6f

16QAM | 960 km | 5 dBm | wss offset 20GHz

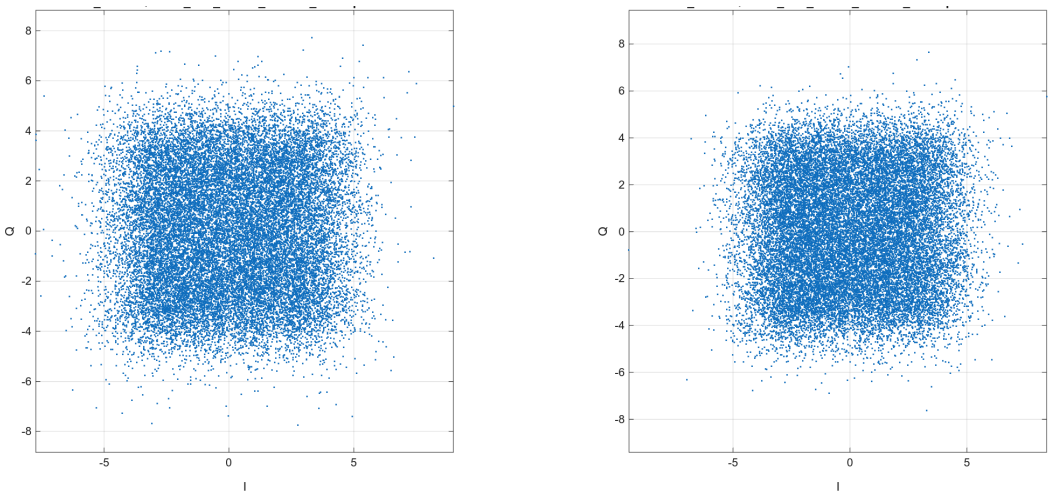

Representative BER: 0.14146 | configuration mean: 0.14211
Accepted / total captures: 10 / 10 | ID: cfg_178659c19b0e8d53251c

Constellations | configurations 259-260

16QAM | 960 km | 5 dBm | wss offset 24GHz

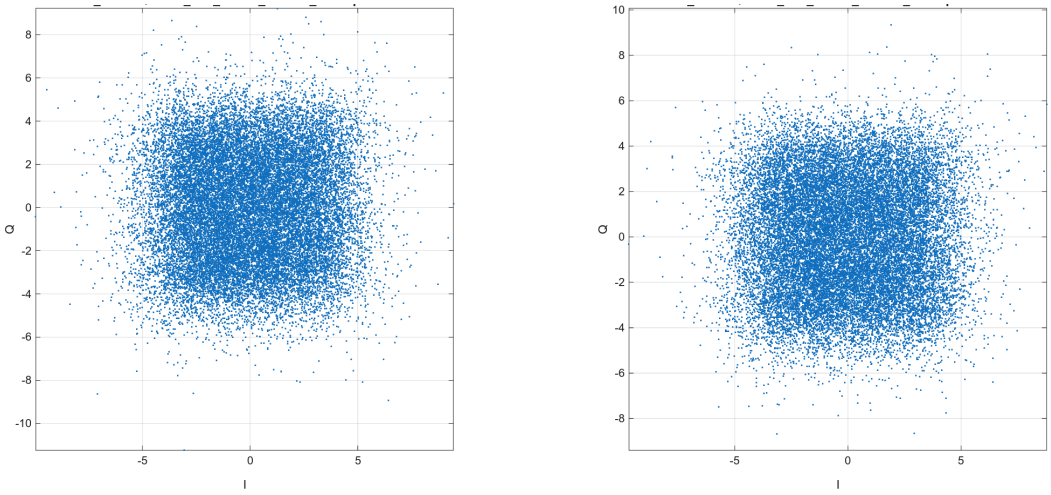

Representative BER: 0.17846 | configuration mean: 0.17874
Accepted / total captures: 9 / 10 | ID: cfg_312e233ff53fde2367ef

16QAM | 960 km | 5 dBm | wss bandwidth 55GHz

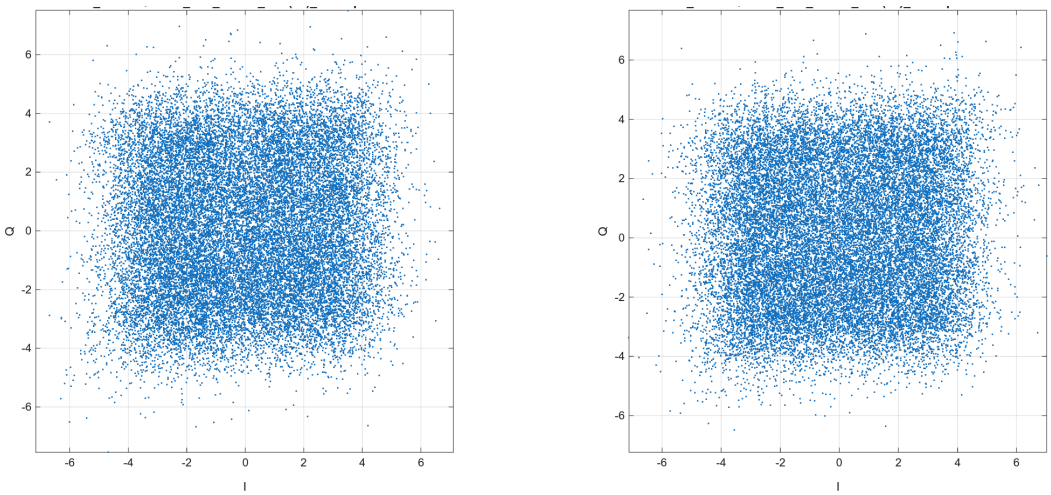

Representative BER: 0.12694 | configuration mean: 0.12725
Accepted / total captures: 11 / 11 | ID: cfg_73ecf82f84bd529d522d

Constellations | configurations 261-262

16QAM | 960 km | 5 dBm | wss bandwidth 60GHz

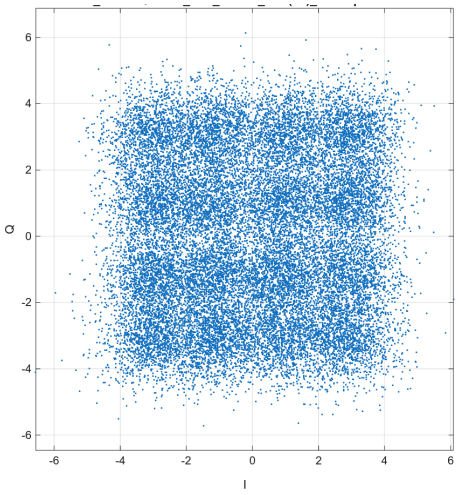

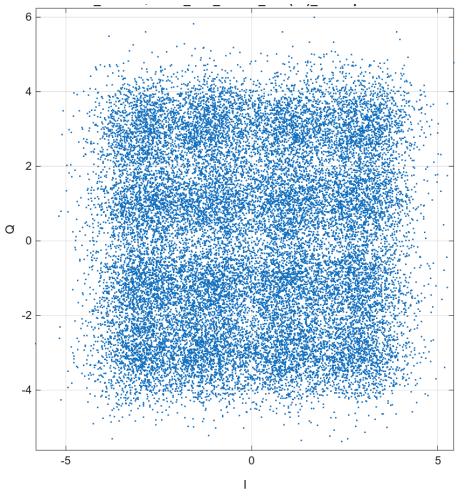

Representative BER: 0.062766 | configuration mean: 0.062583
Accepted / total captures: 9 / 10 | ID: cfg_829c37efe558c7ab1645

16QAM | 960 km | 5 dBm | wss bandwidth 65GHz

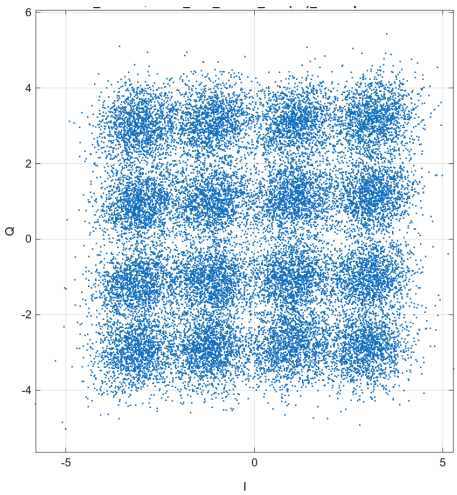

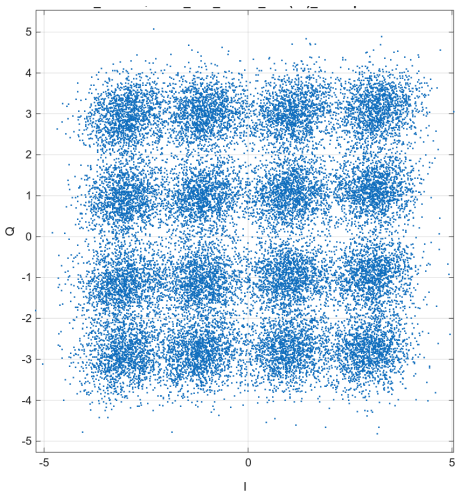

Representative BER: 0.02436 | configuration mean: 0.024618
Accepted / total captures: 10 / 10 | ID: cfg_b60eb63a5b2ec64fbeb9

Constellations | configurations 263-264

16QAM | 960 km | 5 dBm | wss bandwidth 70GHz

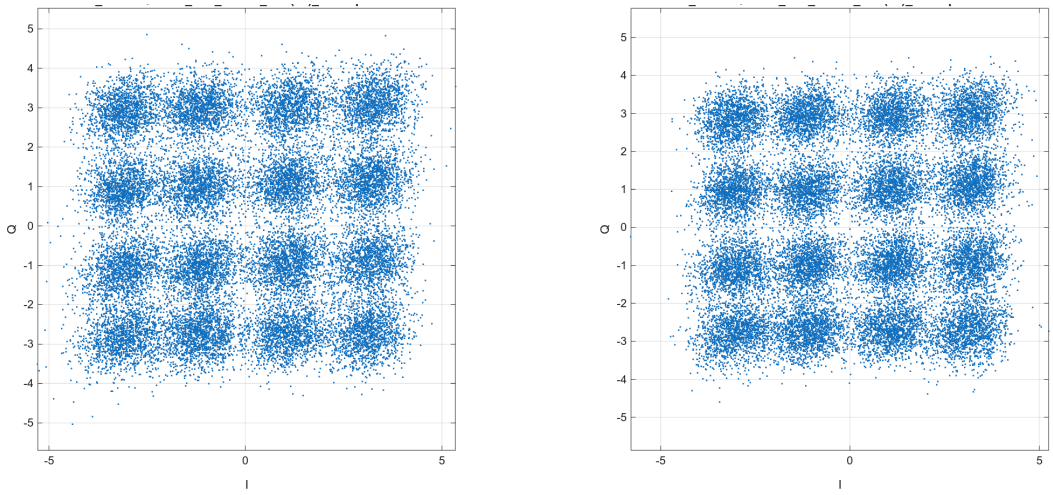

Representative BER: 0.015784 | configuration mean: 0.015674
Accepted / total captures: 10 / 10 | ID: cfg_76ecc82e206f6af20199

16QAM | 960 km | 5 dBm | Normal (75 GHz)

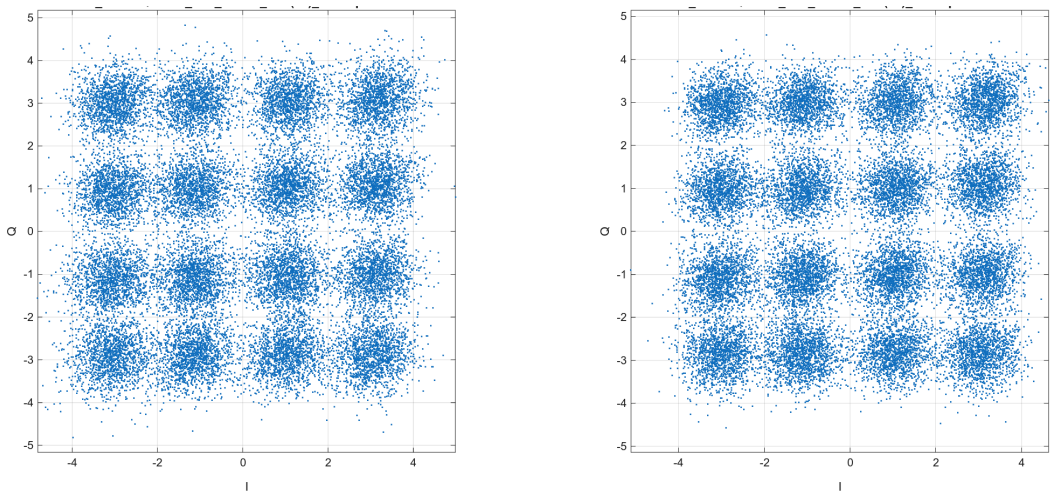

Representative BER: 0.01179 | configuration mean: 0.011831
Accepted / total captures: 18 / 26 | ID: cfg_baa7f30b89298a785372

Constellations | configurations 265-266

16QAM | 1280 km | 1 dBm | attenuation 3dB

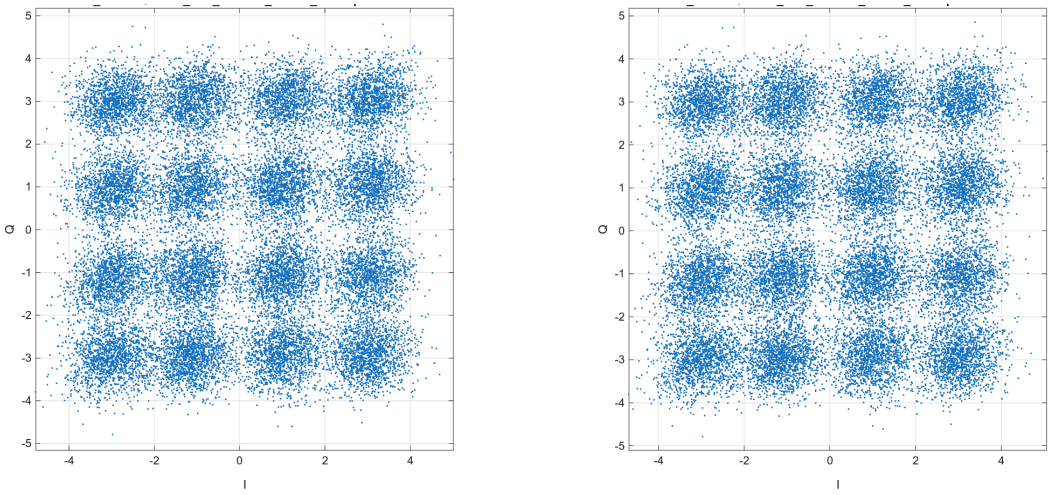

Representative BER: 0.016223 | configuration mean: 0.016564
Accepted / total captures: 9 / 10 | ID: cfg_753c9bf4f78c00582648

16QAM | 1280 km | 1 dBm | attenuation 5dB

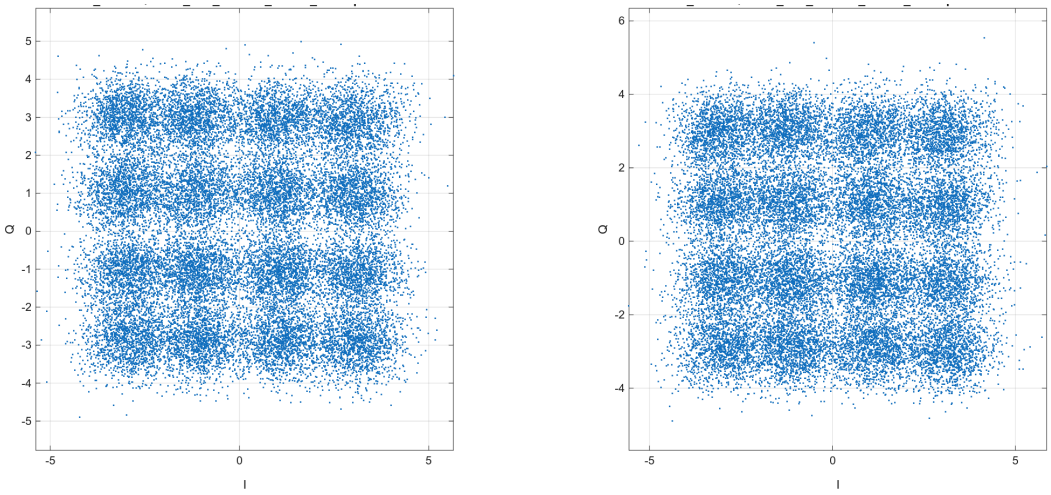

Representative BER: 0.034283 | configuration mean: 0.032691
Accepted / total captures: 6 / 11 | ID: cfg_cc2d9263ed07941c13c4

Constellations | configurations 267-268

16QAM | 1280 km | 1 dBm | edfa 1dB

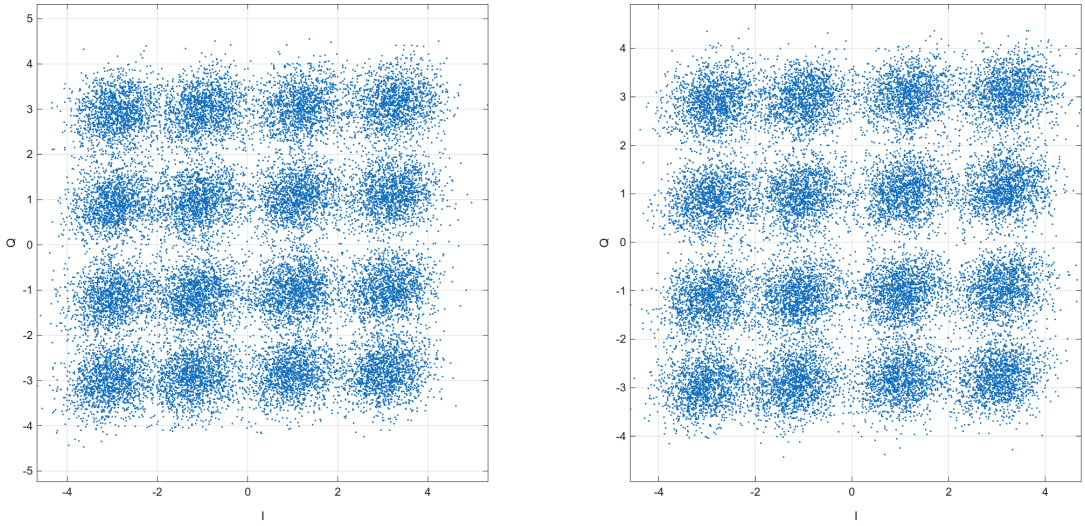

Representative BER: 0.012702 | configuration mean: 0.012889
Accepted / total captures: 9 / 11 | ID: cfg_2d5845f1467d74e9957c

16QAM | 1280 km | 1 dBm | edfa 3dB

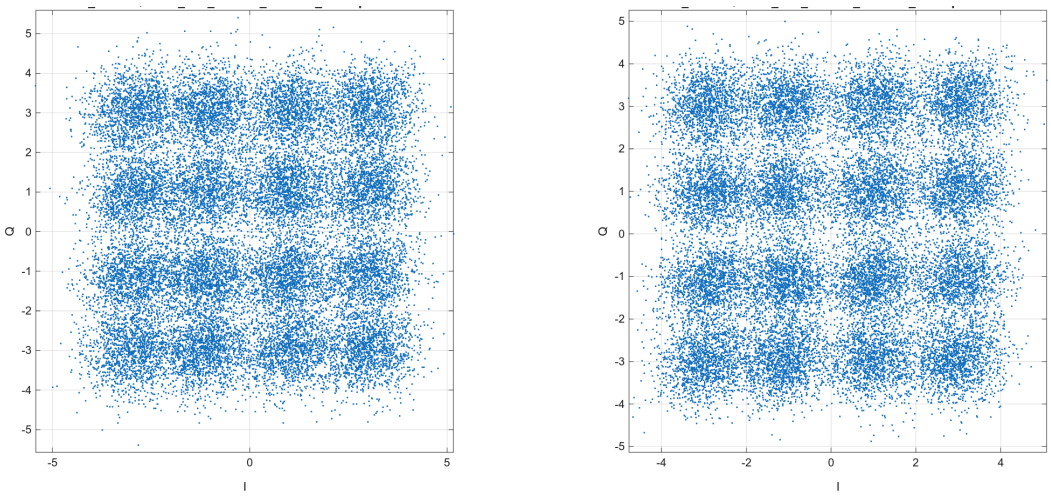

Representative BER: 0.027654 | configuration mean: 0.027728
Accepted / total captures: 9 / 10 | ID: cfg_6e1fef9138ce6c0644c7

Constellations | configurations 269-270

16QAM | 1280 km | 1 dBm | edfa 5dB

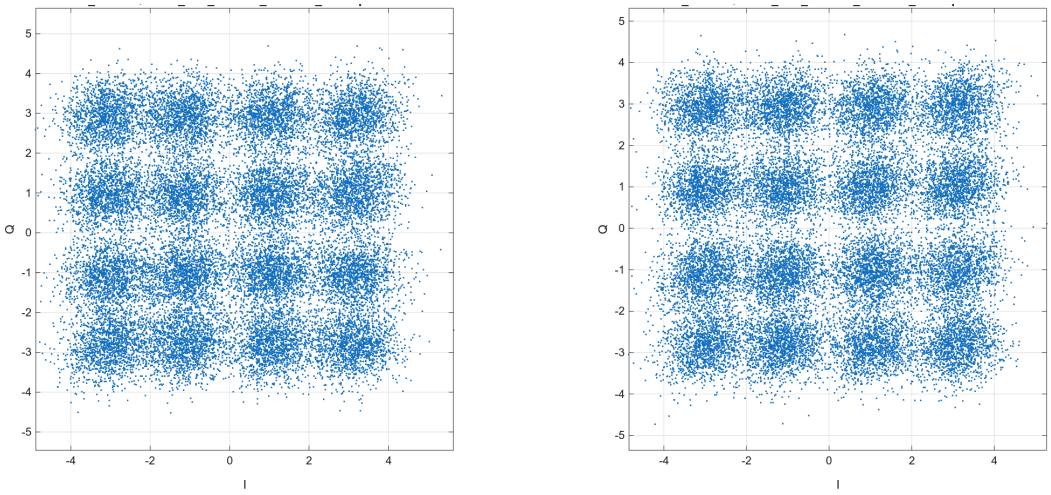

Representative BER: 0.02239 | configuration mean: 0.022224
Accepted / total captures: 10 / 11 | ID: cfg_dc102b5295d8e0f809c7

16QAM | 1280 km | 1 dBm | edfa 9dB

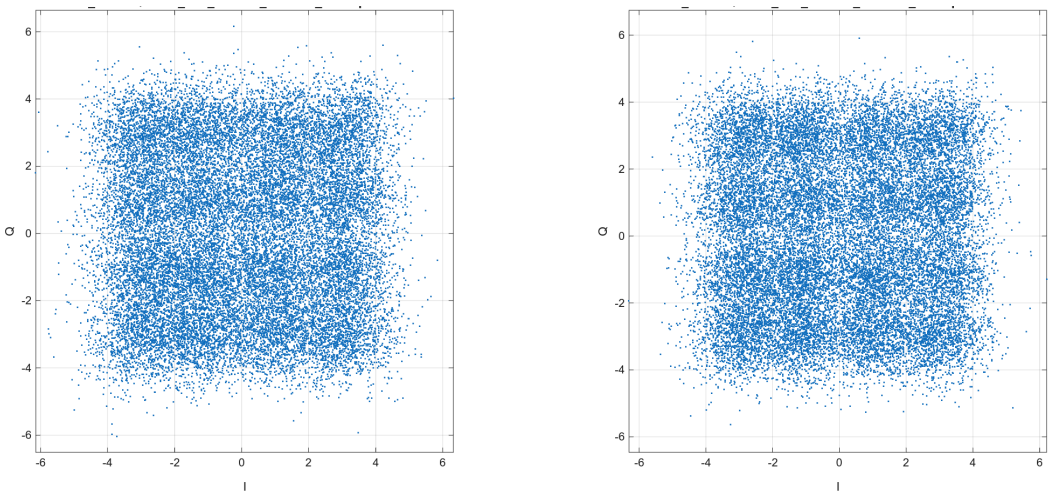

Representative BER: 0.070162 | configuration mean: 0.070358
Accepted / total captures: 10 / 10 | ID: cfg_0862a3c4a5ce3ee2bfa2

Constellations | configurations 271-272

16QAM | 1280 km | 1 dBm | Normal

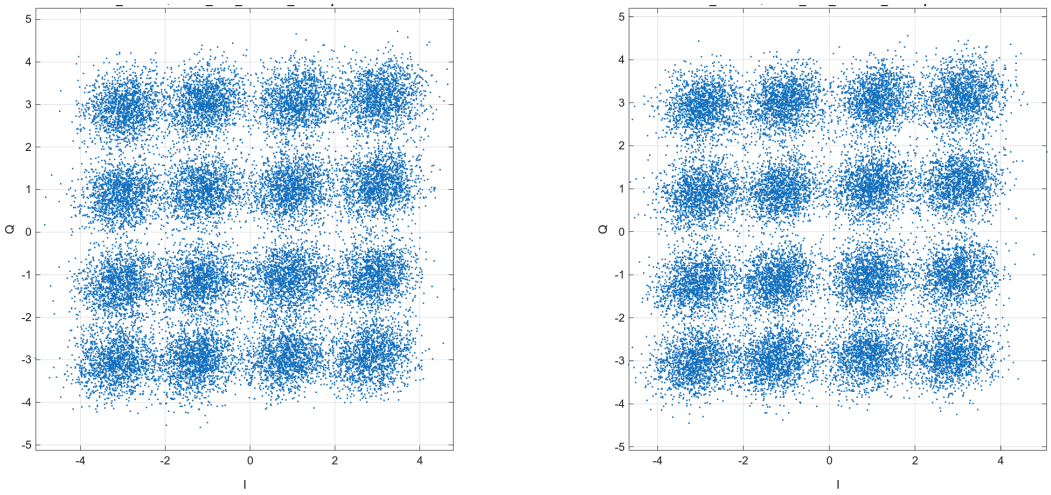

Representative BER: 0.012175 | configuration mean: 0.012078
Accepted / total captures: 11 / 16 | ID: cfg_ea3ddb6870eb494ad3dd

16QAM | 1280 km | 3 dBm | attenuation 3dB

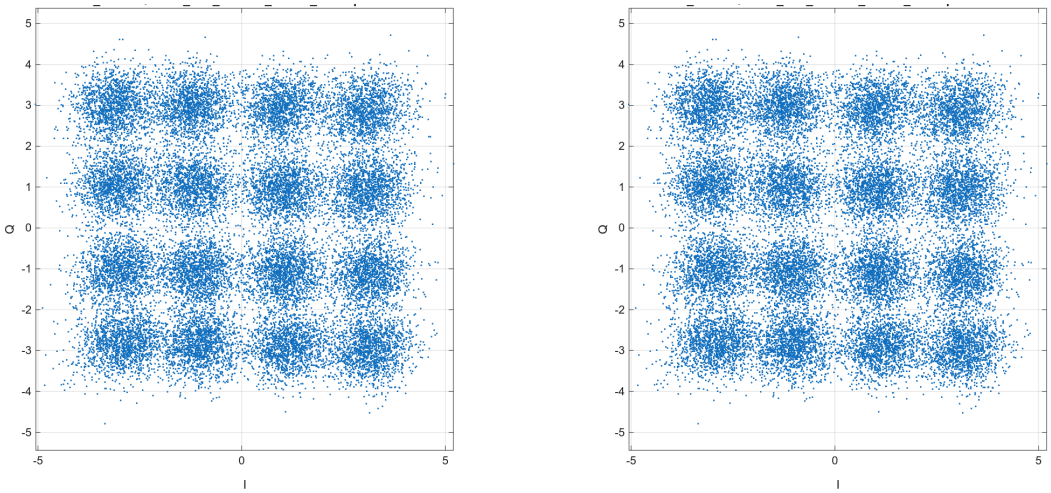

Representative BER: 0.014769 | configuration mean: 0.014951
Accepted / total captures: 8 / 11 | ID: cfg_830994f5576c21718be0

Constellations | configurations 273-274

16QAM | 1280 km | 3 dBm | attenuation 5dB

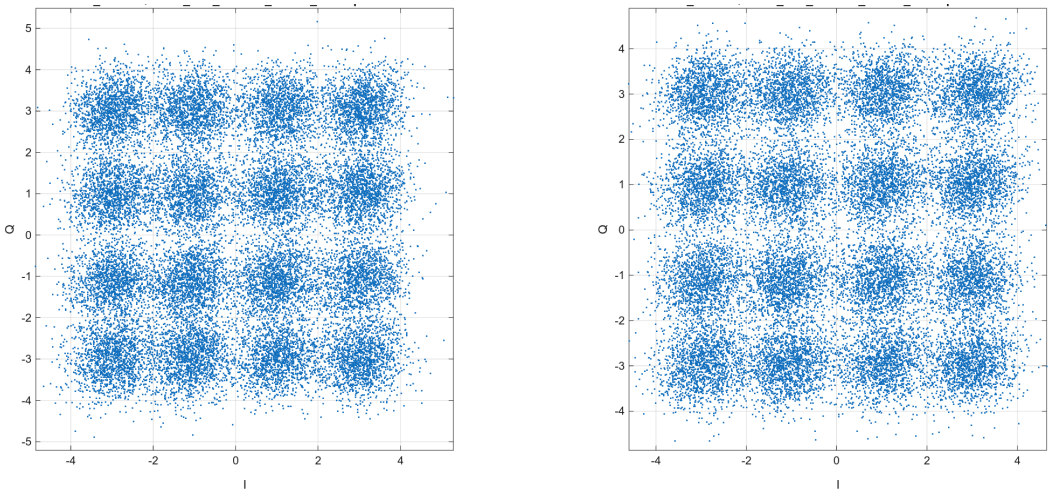

Representative BER: 0.019407 | configuration mean: 0.019433
Accepted / total captures: 10 / 11 | ID: cfg_5f3f0ce008e4404d4f3b

16QAM | 1280 km | 3 dBm | edfa 1dB

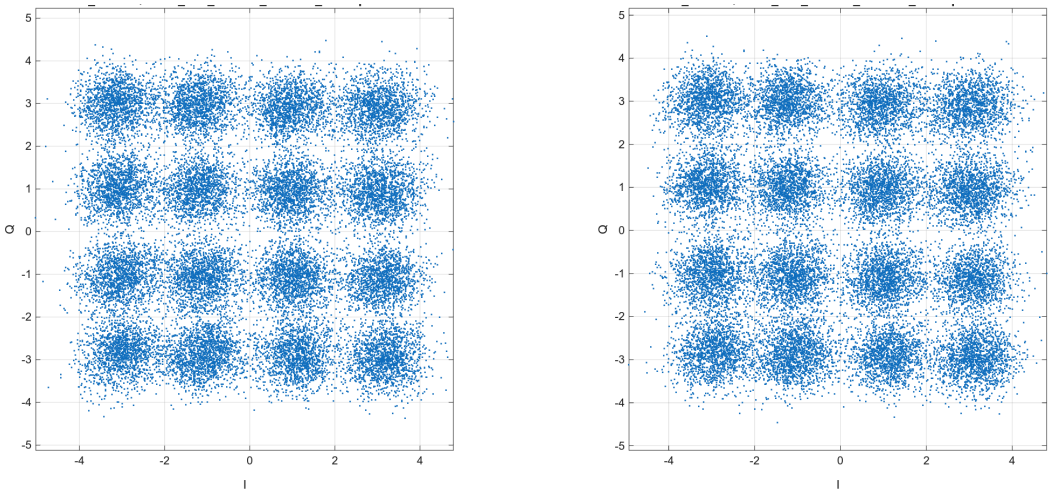

Representative BER: 0.011287 | configuration mean: 0.011268
Accepted / total captures: 10 / 11 | ID: cfg_db1d0fc1830de52addde

Constellations | configurations 275-276

16QAM | 1280 km | 3 dBm | edfa 3dB

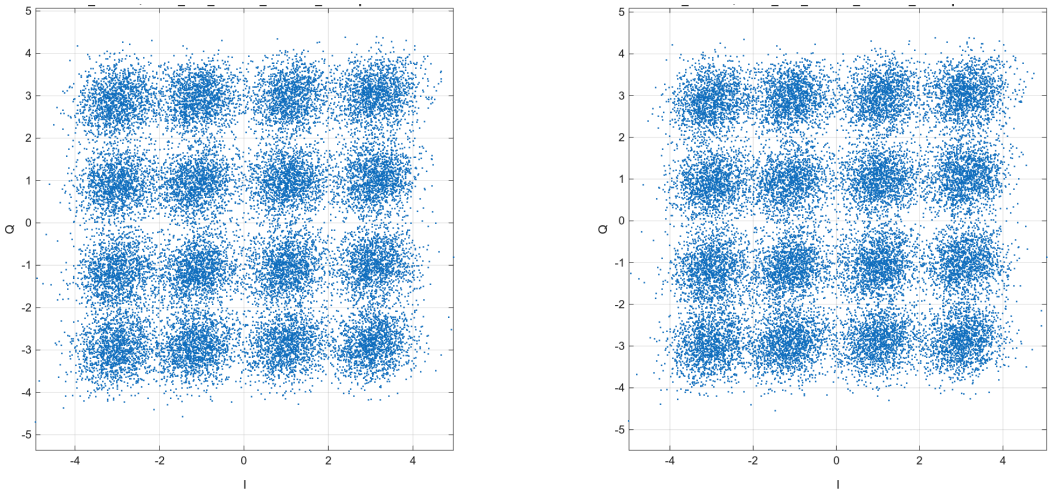

Representative BER: 0.013021 | configuration mean: 0.013079
Accepted / total captures: 11 / 11 | ID: cfg_3d1363342d0ddf745911

16QAM | 1280 km | 3 dBm | edfa 5dB

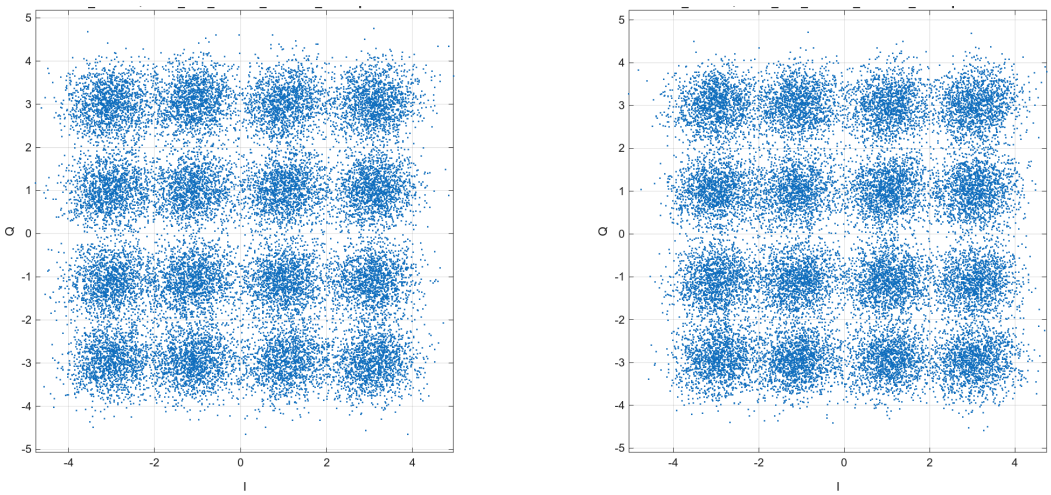

Representative BER: 0.014135 | configuration mean: 0.014712
Accepted / total captures: 9 / 11 | ID: cfg_e473d515a76f5d93050d

Constellations | configurations 277-278

16QAM | 1280 km | 3 dBm | edfa 9dB

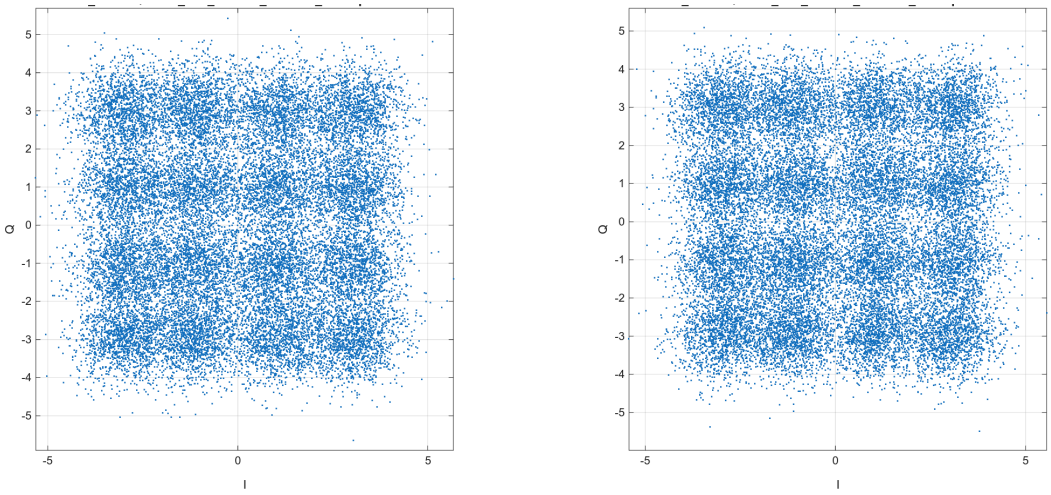

Representative BER: 0.044387 | configuration mean: 0.044344
Accepted / total captures: 10 / 11 | ID: cfg_40077a94234968e1b3b7

16QAM | 1280 km | 3 dBm | Normal

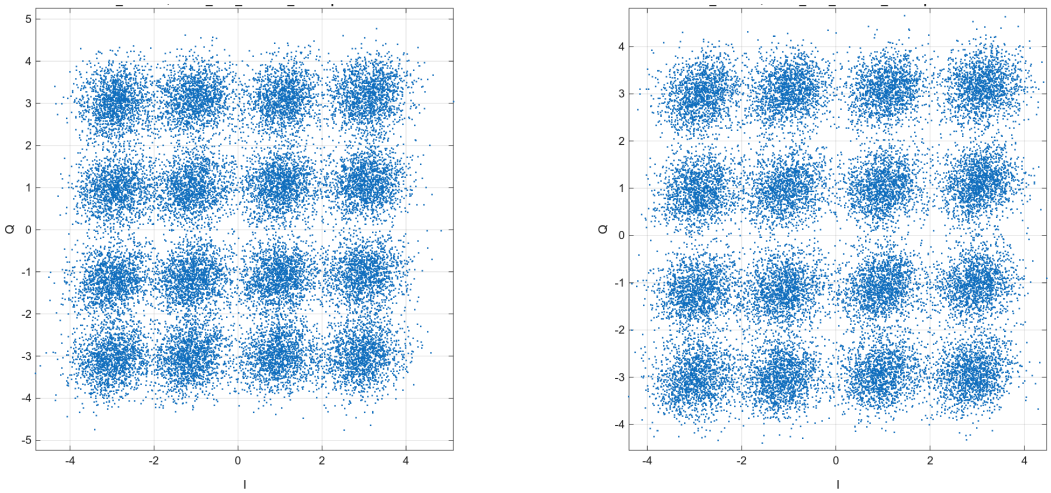

Representative BER: 0.0099602 | configuration mean: 0.009915
Accepted / total captures: 15 / 16 | ID: cfg_8173d074831b5fb18d7b

Constellations | configurations 279-280

16QAM | 1280 km | 5 dBm | attenuation 3dB

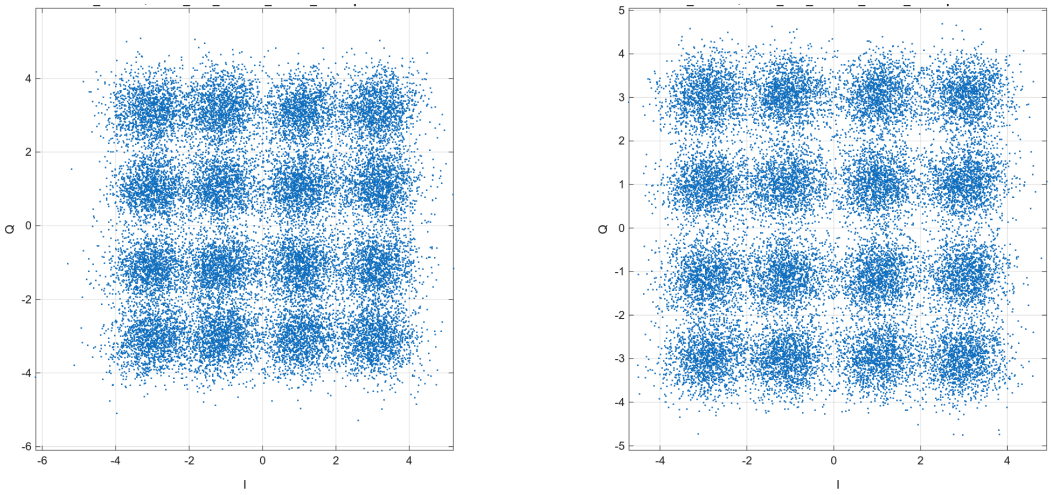

Representative BER: 0.017887 | configuration mean: 0.018376
Accepted / total captures: 8 / 11 | ID: cfg_1b156051c6148685fa74

16QAM | 1280 km | 5 dBm | attenuation 5dB

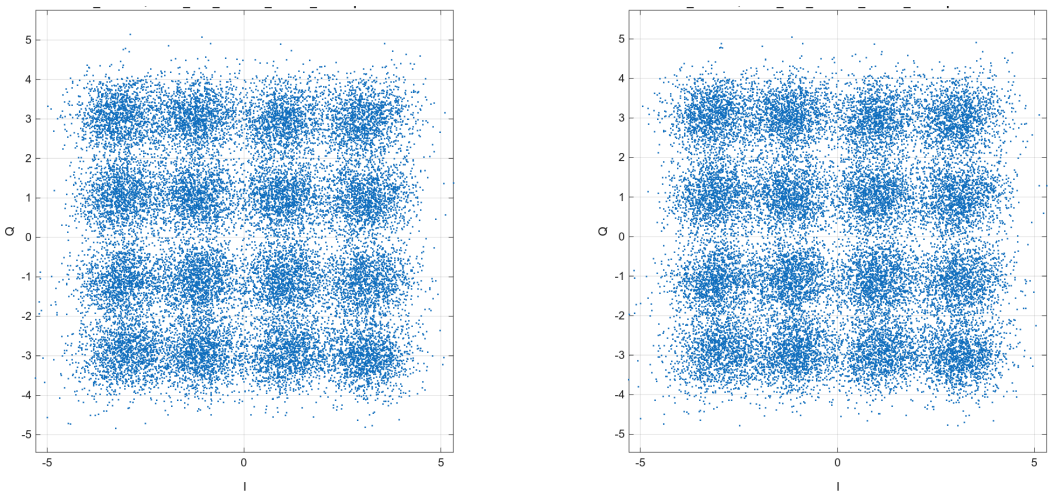

Representative BER: 0.022927 | configuration mean: 0.023129
Accepted / total captures: 10 / 11 | ID: cfg_d500f1864d2c1bb98d4f

Constellations | configurations 281-282

16QAM | 1280 km | 5 dBm | edfa 1dB

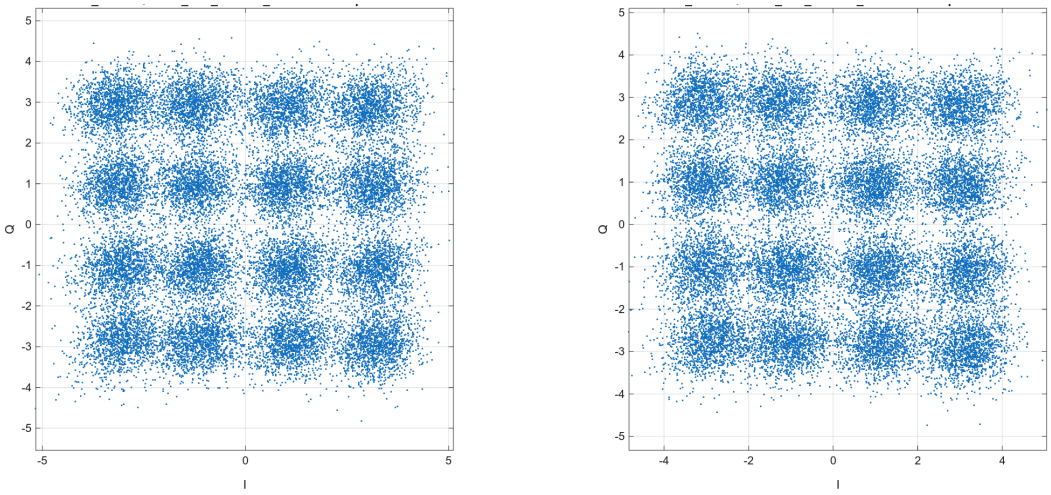

Representative BER: 0.017597 | configuration mean: 0.017587
Accepted / total captures: 11 / 11 | ID: cfg_98c078fa6772af3eb543

16QAM | 1280 km | 5 dBm | edfa 3dB

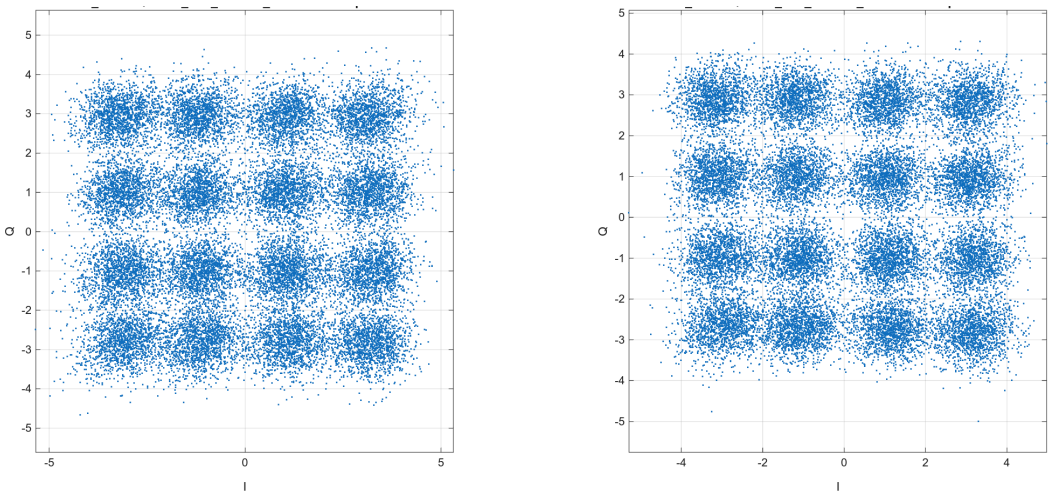

Representative BER: 0.016687 | configuration mean: 0.015829
Accepted / total captures: 11 / 11 | ID: cfg_ed2bdbf8145e2a95b518

Constellations | configurations 283-284

16QAM | 1280 km | 5 dBm | edfa 5dB

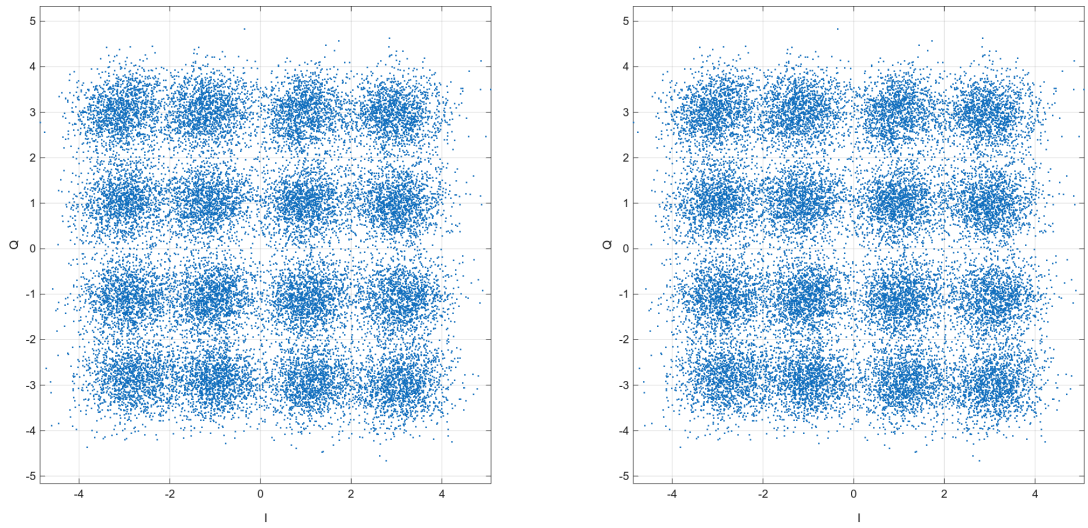

Representative BER: 0.016126 | configuration mean: 0.015016
Accepted / total captures: 5 / 11 | ID: cfg_996ff0540fb3694a0419

16QAM | 1280 km | 5 dBm | edfa 9dB

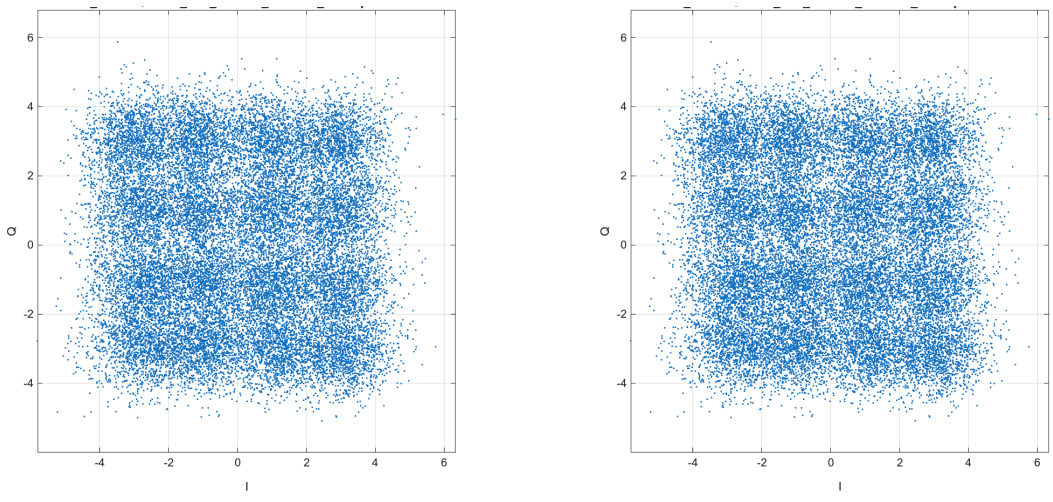

Representative BER: 0.058013 | configuration mean: 0.058358
Accepted / total captures: 5 / 11 | ID: cfg_7160602aee1af4ed62c1

Constellations | configurations 285-286

16QAM | 1280 km | 5 dBm | wss offset 20GHz

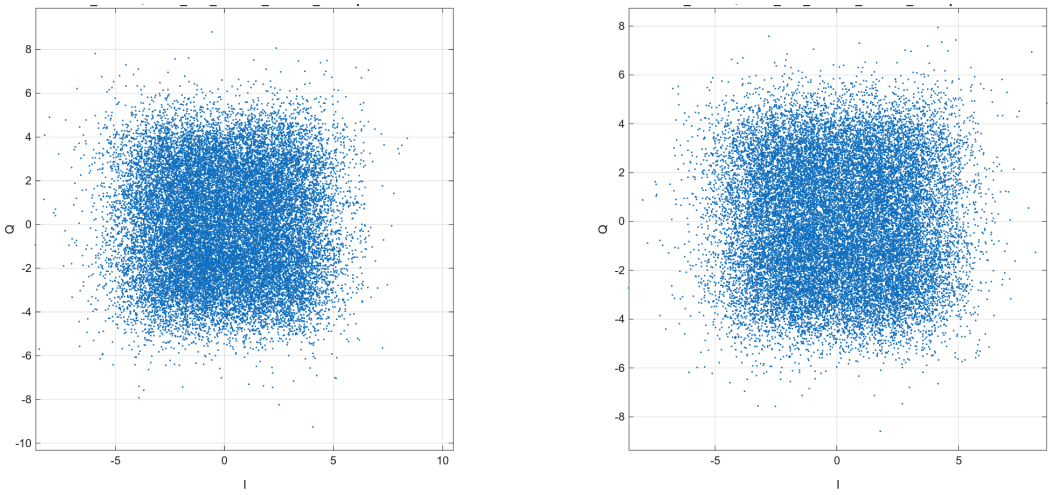

Representative BER: 0.16677 | configuration mean: 0.16677
Accepted / total captures: 1 / 1 | ID: cfg_b43c4f8bdf4eb847ac4b

16QAM | 1280 km | 5 dBm | wss offset 24GHz

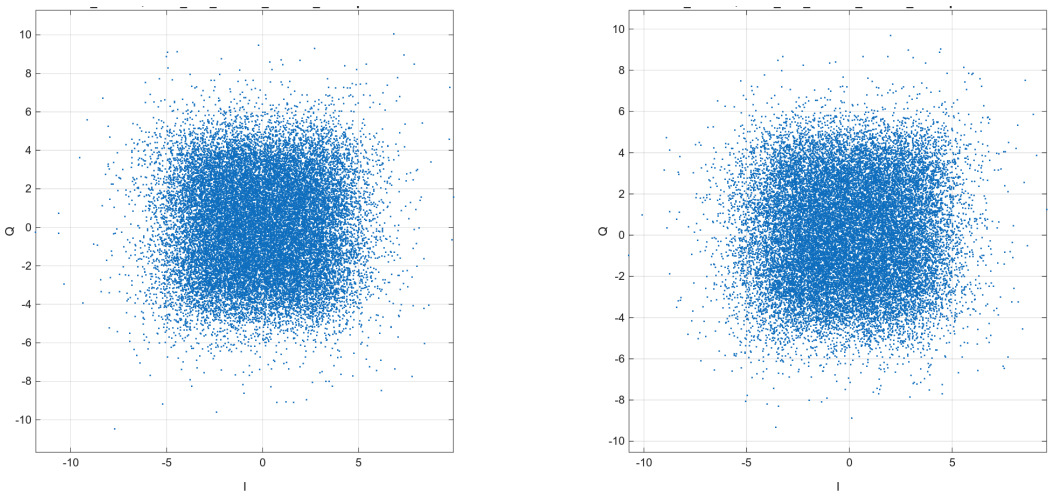

Representative BER: 0.19875 | configuration mean: 0.19875
Accepted / total captures: 1 / 1 | ID: cfg_38b92d770d03bea9e668

Constellations | configurations 287-288

16QAM | 1280 km | 5 dBm | Normal

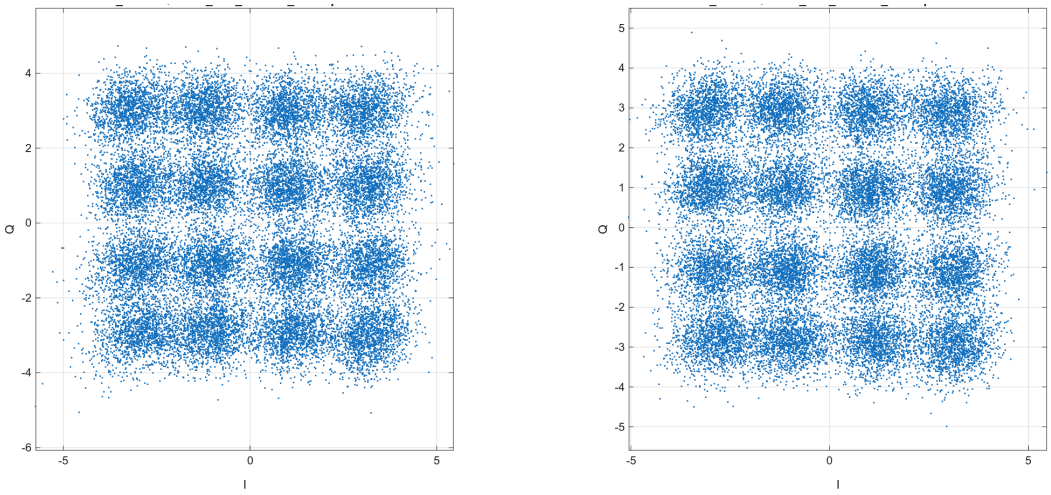

Representative BER: 0.020858 | configuration mean: 0.02073
Accepted / total captures: 13 / 17 | ID: cfg_d8beb96442a80d1bc44b

16QAM | 1280 km | LP not recorded | Normal

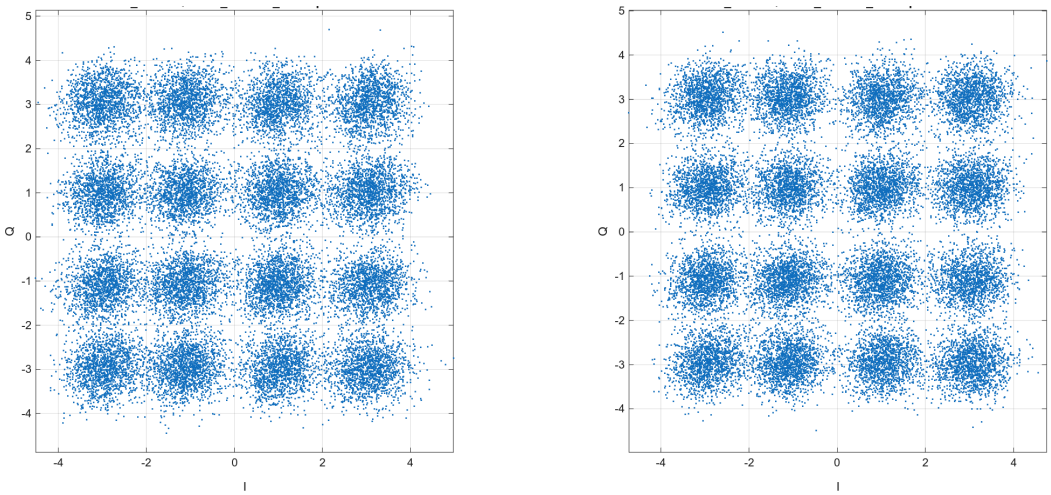

Representative BER: 0.0072859 | configuration mean: 0.0072859
Accepted / total captures: 1 / 1 | ID: cfg_34ebe3b5fc172daf26a2

Constellations | configurations 289-290

16QAM | 1600 km | 1 dBm | Normal

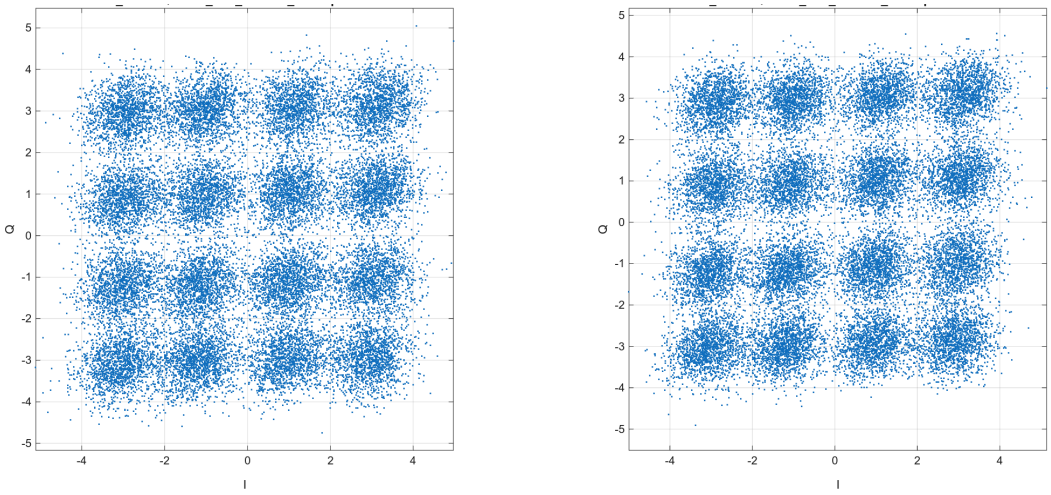

Representative BER: 0.015824 | configuration mean: 0.015828
Accepted / total captures: 16 / 16 | ID: cfg_2f5c716a795b3e7f47af

16QAM | 1600 km | 3 dBm | Normal

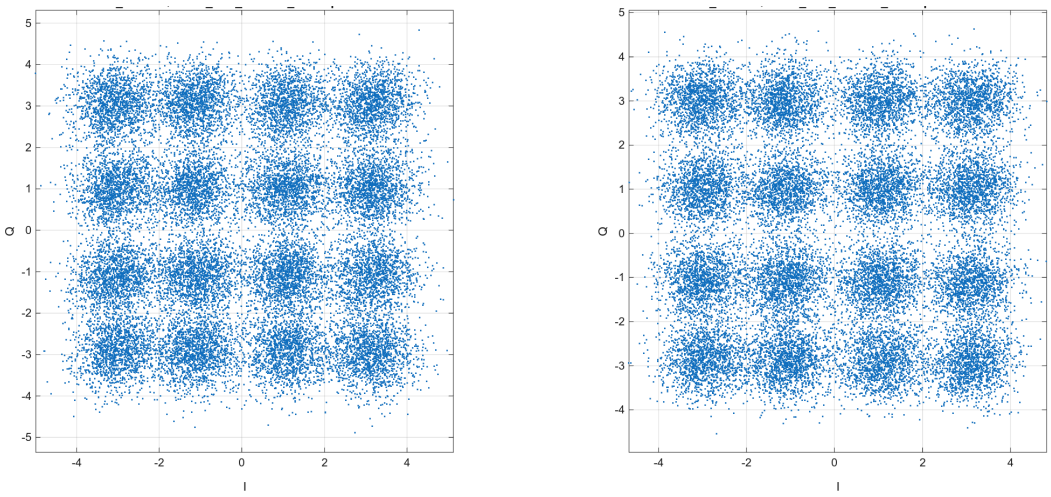

Representative BER: 0.016343 | configuration mean: 0.016399
Accepted / total captures: 16 / 16 | ID: cfg_e24ca8251635e1f0218a

Constellations | configurations 291-292

16QAM | 1600 km | 5 dBm | Normal

No accepted representative constellation

Representative BER: NA | configuration mean: NA
Accepted / total captures: 0 / 16 | ID: cfg_a1ee5c6a750d06e8280e

16QAM | 1920 km | 1 dBm | Normal

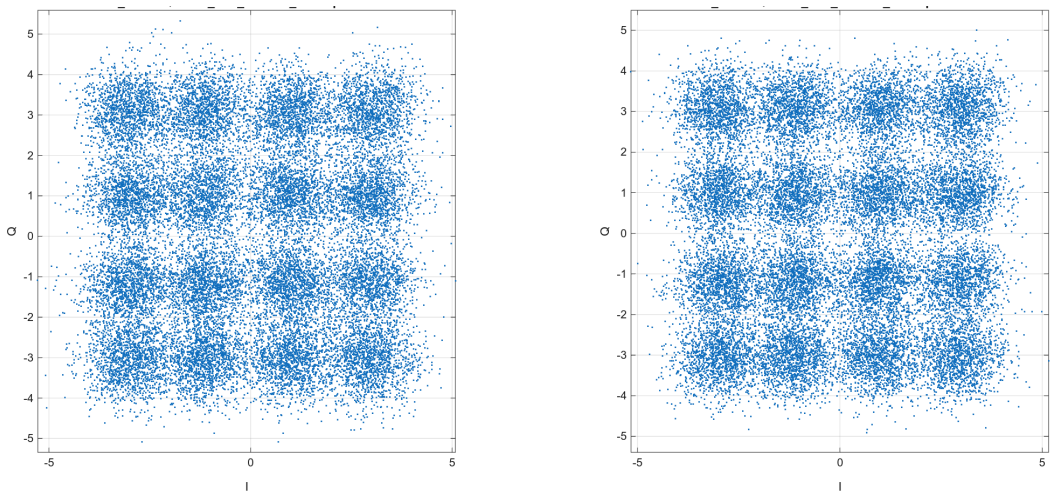

Representative BER: 0.026037 | configuration mean: 0.026136
Accepted / total captures: 13 / 16 | ID: cfg_922db5b889564917d2c6

Constellations | configurations 293-294

16QAM | 1920 km | 3 dBm | Normal

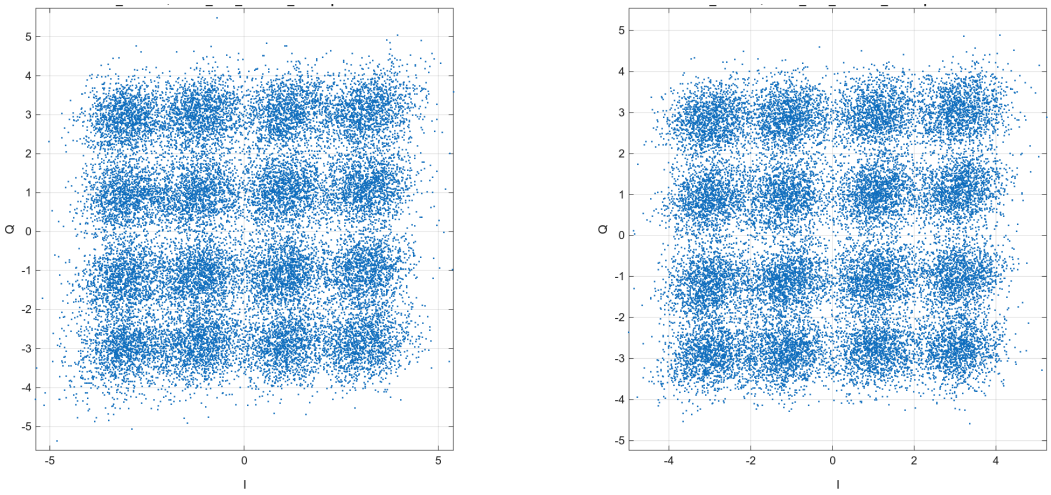

Representative BER: 0.023253 | configuration mean: 0.023369
Accepted / total captures: 10 / 16 | ID: cfg_f4ae7358a7a8c4c1f41f

16QAM | 1920 km | 5 dBm | Normal

No accepted representative constellation

Representative BER: NA | configuration mean: NA
Accepted / total captures: 0 / 16 | ID: cfg_ecb6b0be3068310e19f0

Constellations | configurations 295-296

16QAM | 2240 km | 1 dBm | Normal

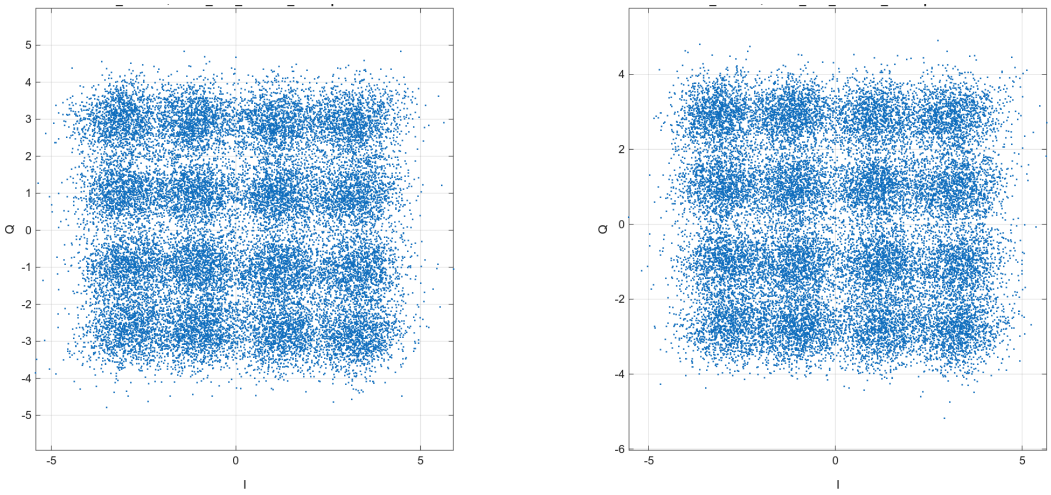

Representative BER: 0.032525 | configuration mean: 0.032391
Accepted / total captures: 16 / 17 | ID: cfg_6e1beffab1cb27795a47

16QAM | 2240 km | 3 dBm | Normal

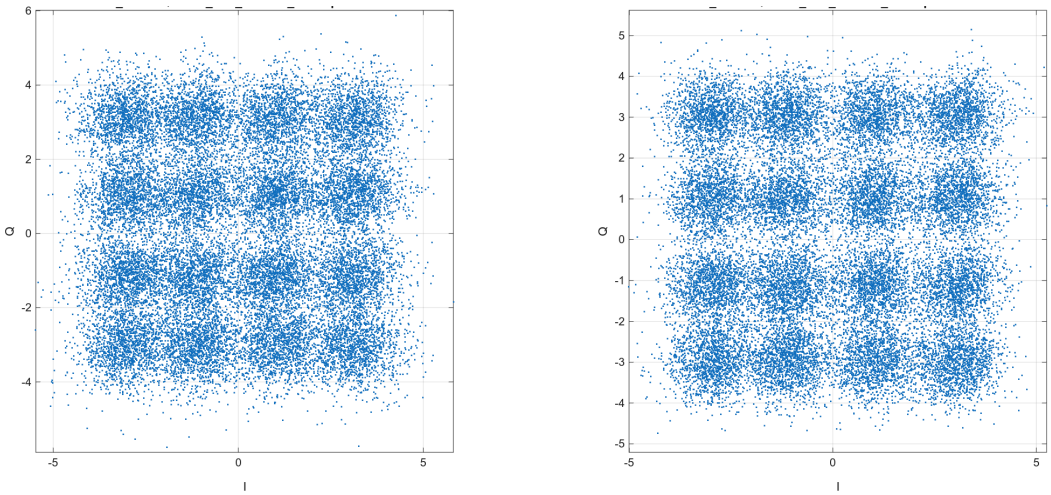

Representative BER: 0.028297 | configuration mean: 0.02953
Accepted / total captures: 12 / 17 | ID: cfg_a760a2c2248756c5e266

Constellations | configurations 297-298

16QAM | 2240 km | 5 dBm | Normal

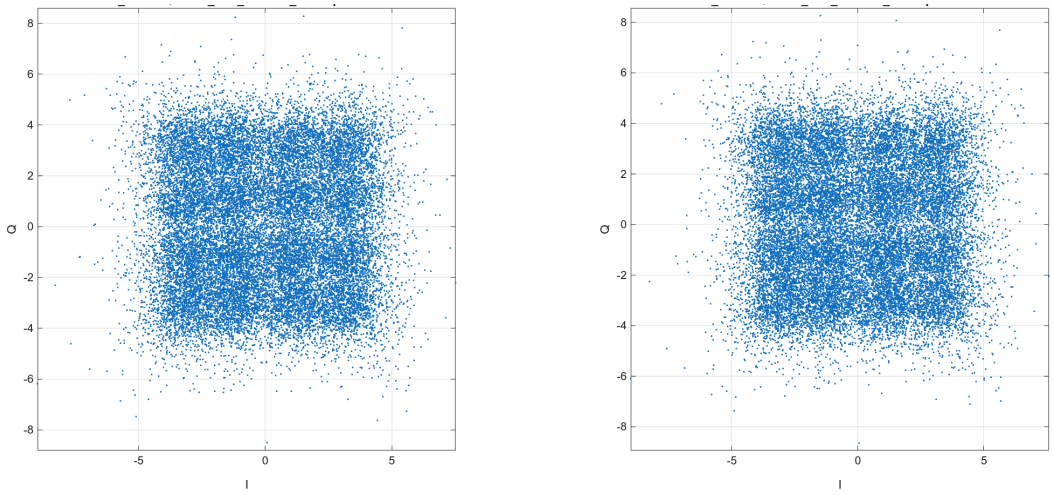

Representative BER: 0.067747 | configuration mean: 0.14852
Accepted / total captures: 4 / 17 | ID: cfg_fadd3dc6b1c9e4506326

64QAM | 320 km | 5 dBm | Normal

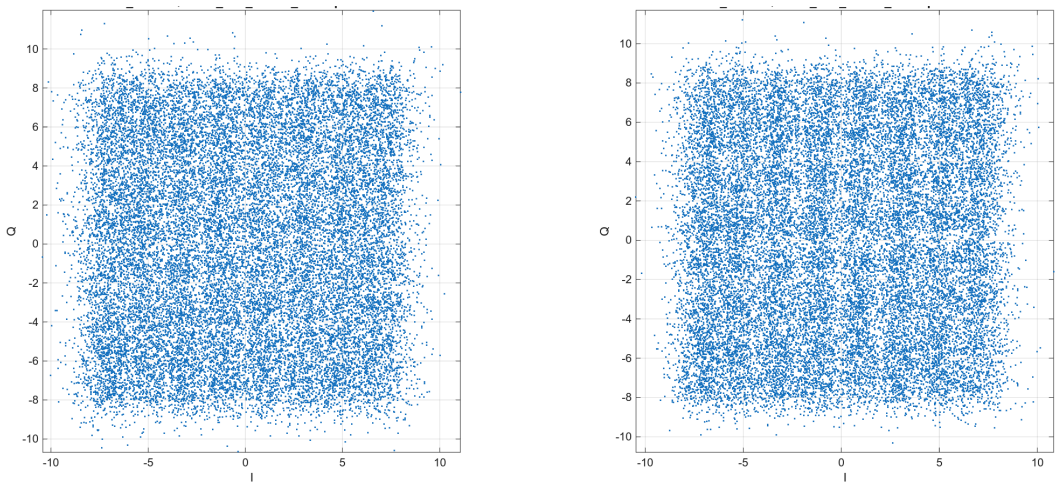

Representative BER: 0.1891 | configuration mean: 0.1891
Accepted / total captures: 1 / 1 | ID: cfg_1a23528e1063fdcc5a6c

Constellations | configurations 299-299

64QAM | 640 km | 5 dBm | Normal

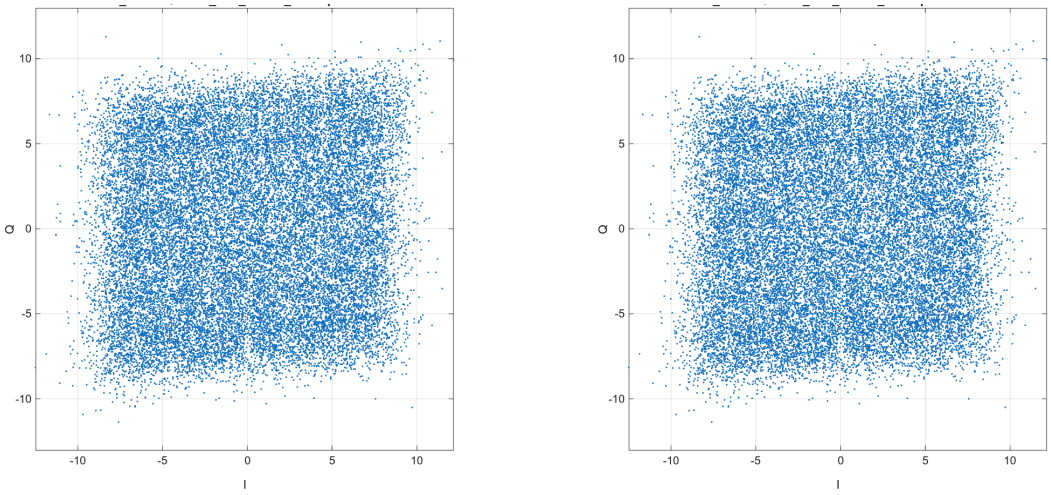

Representative BER: 0.2091 | configuration mean: 0.2091
Accepted / total captures: 1 / 1 | ID: cfg_e9366117e43856e2eea2