
1. General Description

A: COMPONENT

1. FRONT SEAT

• Manual seat LH

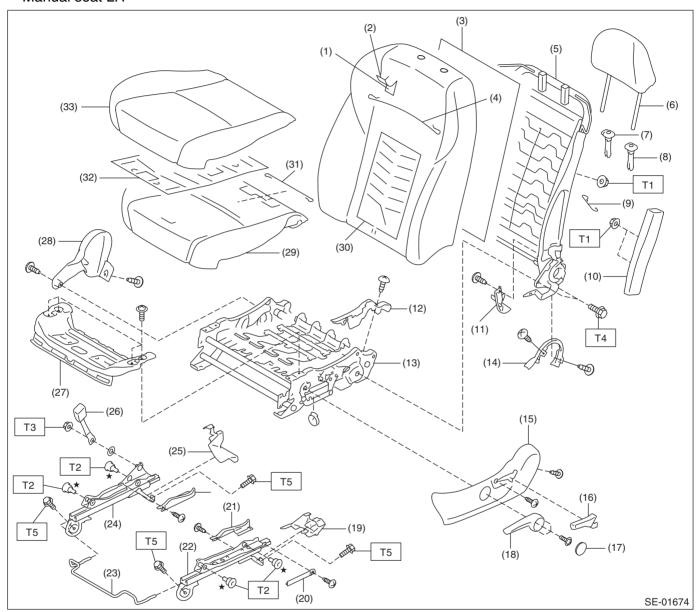

- (1) Pad ASSY front seat backrest
- (2) Cover COMPL front backrest
- (3) Cover silencer front seat backrest
- (4) Wire set front seat backrest
- (5) Frame ASSY front backrest
- (6) Headrest ASSY front
- (7) Bushing lock headrest
- (8) Bushing free headrest
- (9) Hook backrest front
- (10) Side airbag module LH
- (11) Cover inner front
- (12) Cover frame front cushion
- (13) Frame ASSY front cushion
- (14) Cover hinge base front seat

- (15) Cover hinge front seat OUT
- (16) Lever reclining
- (17) Cap lifter lever
- (18) Knob lifter
- (19) Cover bolt rear OUT
- (20) Cover slide rail OUT
- (21) Cover slide rail OUT
- (22) Slide rail ASSY OUT
- (23) Lever towel bar
- (24) Slide rail ASSY INN
- (25) Cover bolt rear INN
- (26) Seat belt inner front
- (27) Panel front seat
- (28) Cover hinge front seat INN

- (29) Pad ASSY front seat cushion
- (30) Heater unit front seat backrest
- (31) Wire set front seat cushion
- (32) Heater unit front seat cushion
- (33) Cover front cushion

Tightening torque: N⋅m (kgf-m, ft-lb)

T1: 6 (0.6, 4.4)


T2: 15 (1.5, 11.1)

T3: 38 (3.9, 28.0)

T4: 52 (5.3, 38.4)


T5: 53 (5.4, 39.1)

• Manual seat RH

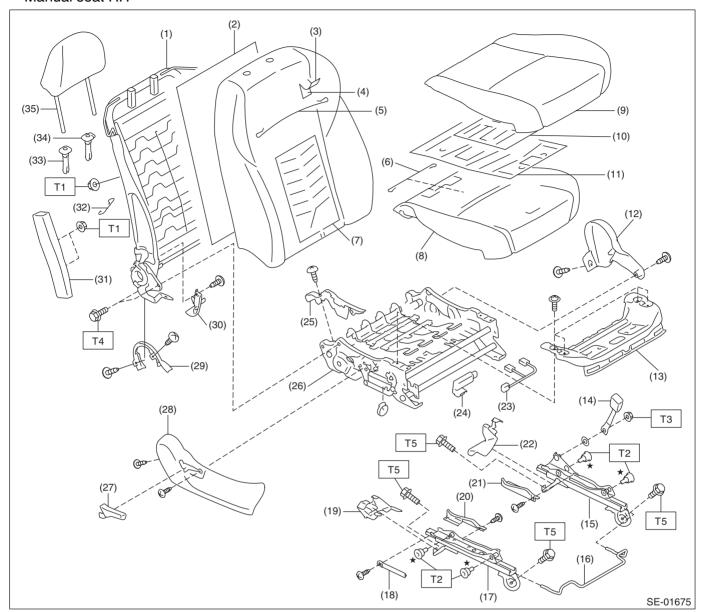

(1)	Frame ASSY - front backrest	(15)	Slide rail ASSY - INN	(29)	Cover - hinge base front seat
(2)	Cover - silencer front seat back- rest	(16)	Lever - towel bar	(30)	Cover - inner front
(3)	Cover COMPL - front backrest	(17)	Slide rail ASSY - OUT	(31)	Side airbag module RH
(4)	Pad ASSY - front seat backrest	(18)	Cover - slide rail OUT	(32)	Hook - backrest front
(5)	Wire set - front seat backrest	(19)	Cover - bolt rear OUT	(33)	Bushing - lock headrest
(6)	Wire set - front seat cushion	(20)	Cover - slide rail OUT	(34)	Bushing - free headrest
(7)	Heater unit - front seat backrest	(21)	Cover - slide rail INN	(35)	Headrest ASSY - front
(0)	Pad ASSY - front seat cushion	(22)	Cover - bolt rear INN		
(8)	rau ASST - ITOTIL SEAL CUSTIIOTI	(22)	Cover - boil real livin		
(9)	Cover - front cushion	(23)	Harness - occupant detection sensor	Tight	ening torque: N·m (kgf-m, ft-lb)
		, ,	Harness - occupant detection sen-		ening torque: N·m (kgf-m, ft-lb) 6 (0.6, 4.4)
(9)	Cover - front cushion	(23)	Harness - occupant detection sensor Control unit - occupant detection	T1:	
(9)	Cover - front cushion Heater unit - front cushion	(23)	Harness - occupant detection sensor Control unit - occupant detection sensor	T1:	6 (0.6, 4.4)
(9) (10) (11)	Cover - front cushion Heater unit - front cushion Occupant detection sensor	(23) (24) (25)	Harness - occupant detection sensor Control unit - occupant detection sensor Cover - frame front seat cushion	T1: T2: T3:	6 (0.6, 4.4) 15 (1.5, 11.1)

· Power seat

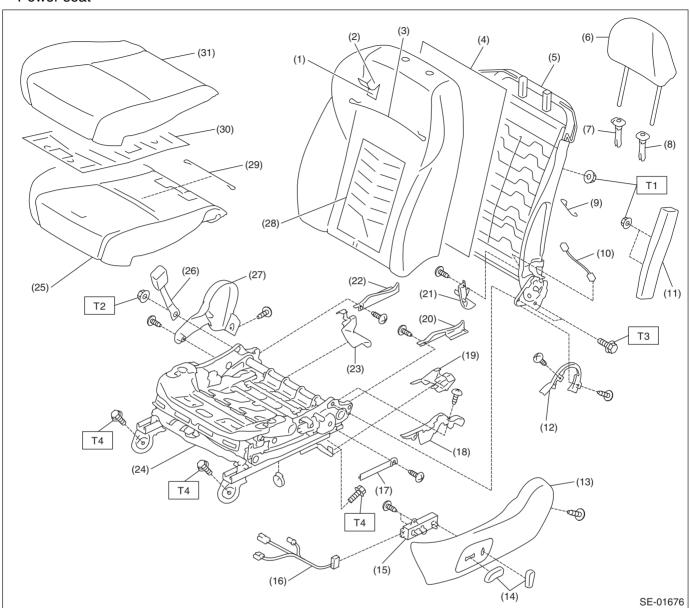

- (1) Pad ASSY front seat backrest
- (2) Cover COMPL front backrest
- (3) Wire set front seat backrest
- (4) Cover silencer front seat backrest
- (5) Frame ASSY front backrest
- (6) Headrest ASSY front
- (7) Bushing lock headrest
- (8) Bushing free headrest
- (9) Hook backrest front
- (10) Harness ASSY power seat
- (11) Side airbag module
- (12) Cover hinge base front seat
- (13) Cover hinge front seat OUT

- (14) Knob power seat
- (15) Switch ASSY power seat
- (16) Harness ASSY power seat
- (17) Cover slide rail OUT
- (18) Cover frame front seat cushion
- (19) Cover bolt rear OUT
- (20) Cover slide rail OUT
- (21) Cover inner front
- (22) Cover slide rail INN
- (23) Cover bolt rear INN
- (24) Frame ASSY front cushion
- (25) Pad ASSY front seat cushion
- (26) Seat belt inner front

- (27) Cover hinge front seat INN
- (28) Heater unit front seat backrest
- (29) Wire set front seat cushion
- (30) Heater unit front cushion
- (31) Cover front cushion

Tightening torque: N⋅m (kgf-m, ft-lb)


T1: 6 (0.6, 4.4)

T2: 38 (3.9, 28.0)

T3: 52 (5.3, 38.4)

T4: 53 (5.4, 39.1)

2. REAR SEAT

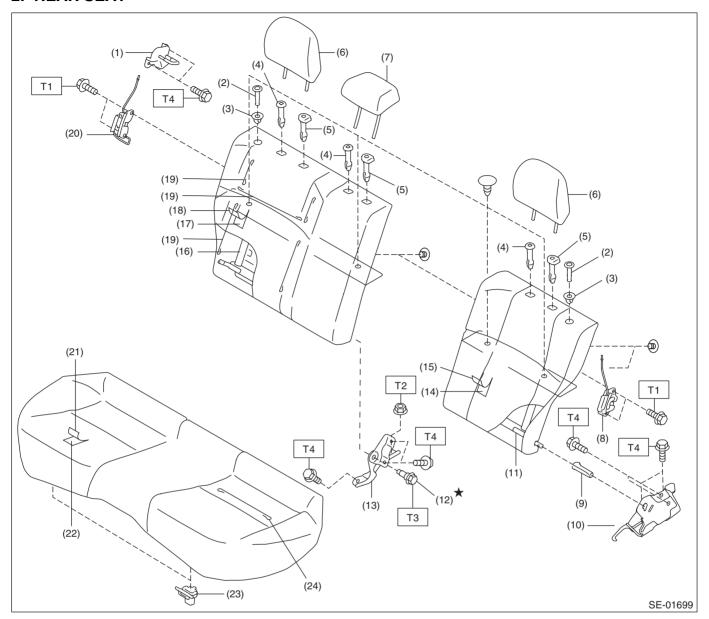

- (1) Striker backrest rear RH
- (2) Knob backrest rear
- (3) Knob guide
- (4) Bushing headrest
- (5) Bushing lock ASSY
- (6) Headrest ASSY rear backrest
- (7) Headrest ASSY rear center
- (8) Lock ASSY backrest rear LH
- (9) Bushing backrest hinge
- (10) Hinge ASSY rear backrest
- (11) Frame ASSY rear backrest LH

- (12) Flange bolt
- (13) Hinge ASSY backrest center
- (14) Pad ASSY rear seat backrest LH
- (15) Cover COMPL rear backrest LH
- (16) Frame ASSY rear backrest RH
- (17) Pad ASSY rear seat backrest RH
- (18) Cover COMPL rear backrest RH
- (19) Wire set rear backrest
- (20) Lock ASSY backrest rear RH
- (21) Cover rear cushion
- (22) Pad and frame ASSY rear cushion

- 23) Hook seat cushion rear
- (24) Wire set rear cushion

Tightening torque: N⋅m (kgf-m, ft-lb)

T1: 22.5 (2.3, 16.6)

T2: 24.5 (2.5, 18.1)

T3: 28.9 (2.9, 21.3)

T4: 33 (3.4, 24.3)

B: CAUTION

When removing the front seat from the vehicle, refer to "CAUTION" of "General Description" in "AIRBAG SYSTEM" section. <Ref. to AB-9, CAUTION, General Description.>

C: PREPARATION TOOL

1. GENERAL TOOL

TOOL NAME	REMARKS
Long nose plier	Used for removing the hog ring.
Hog ring pliers	Used for installing the hog ring.
Circuit tester	Used for measuring resistance and voltage.