


Key matrix (right half, COL2ROW, 48 keys)

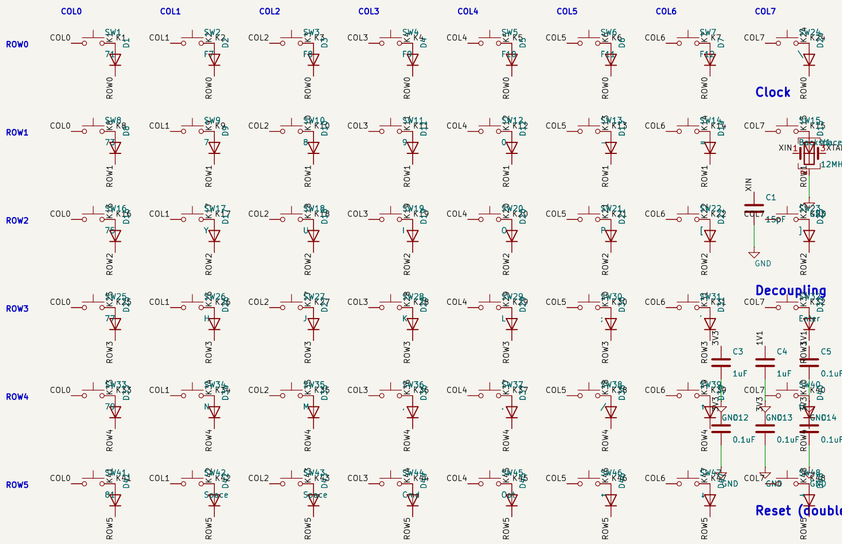


Flash



Clock




Decoupling

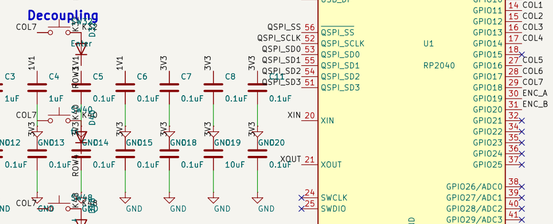


MCU: RP2040 (QFN-56), 12 MHz, 3.3 V I/O, 16 MB QSPI flash


Reset (double-tap = bootloader) / BOOTSEL pads

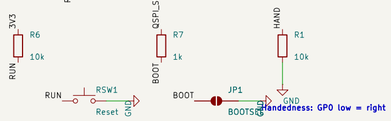


3.3 V LDO




USB-C (USB 2.0 device)

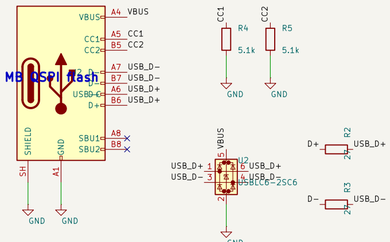

Power



Split link: TRRS 3.5 mm (5 V + QMK serial)



OLED 0.91" 128x32 (I2C, SSD1306, 3.3 V)



Thumbwheel encoder Alps EC05E1220401 (12 detents / 12 pulses, C = common)



nrsk	
Sheet: /	
File: nrsk-right.kicad_sch	
Title: nrsk split keyboard – right half	
Size: A2	Date:
KiCad E.D.A. 10.0.6	**Rev: 2.0**
	Id: 1/1