


////ALPINE

SERVICE MANUAL

4 CHANNEL + MONO POWER AMPLIFIER

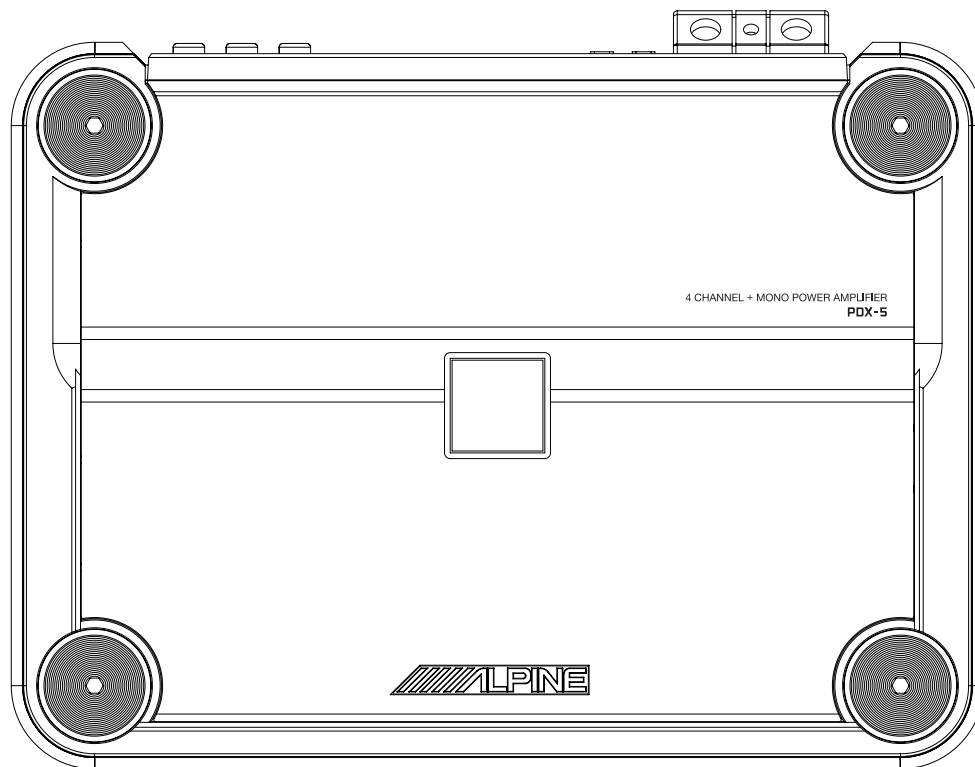

[TO ALPINE Home Page](#)

3 / 08-A
T0110800010

PDX-5

<Cautions for Safe Repair Work>

The following cautions will prevent accidents in the workplace and will ensure safe products.

*The symbols indicate caution is needed to prevent injuries and damage to property.

The symbols and their meanings follow.

 Warning	If you ignore this symbol and handle the product incorrectly or unsafely, serious injury or death may result.
 Caution	If you ignore this symbol and handle the product incorrectly or unsafely, injury or only material damage may result.

*The following symbols indicate two levels of cautions.

 When you see this symbol, you have to be very careful.	
 When you see this symbol, you have to follow the instructions there.	

Warning

 Do not look squarely into the laser light coming from the pickup. You may lose your sight.	 Fuse Caution Always use a designated fuse. Use of an incorrect fuse may result in a fire.
--	--

Caution

 Do not allow wiring to be caught in the screw/chassis. If wiring is caught in the screw/chassis, it may cause a short circuit, resulting in a fire.	 Battery Caution Use the designated battery. Confirm the correct polarity and seat of the battery. An incorrect battery or an improperly connected or seated battery may result in a fire.
 High Temperature Caution Touching the heat sink may cause severe burns.	 Designated Parts Caution Look up the part list and ensure that only designated parts are used to prevent problems or accidents.
 Reverse Power Supply Connections or Misconnections Caution Reverse power supply connections or misconnections may cause ignition problems and smoke may result.	 Wiring Caution Ensure that the wiring is correct when rewiring to prevent problems with ignition/breakdown.
 Soldering Caution Hot solder from solder splash may cause severe burns.	 Wear Gloves Wear gloves to prevent electrical shocks or injury from the end face of the metal.

Contents

Packing Assembly Parts List	4
Packing Method View	4
Specifications	5
Block Diagram	6
Parts Layout on P.W.Boards and Wiring Diagram	7 to 8
Schematic Diagram	9 to 13
Terminal Voltage of IC/TR	14 to 17
Description of IC Terminal	18
Exploded View (Cabinet)	19


NOTE : Due to continuing product improvement, specifications and designs are subject to change without notice.

Packing Assembly Parts List

Symbol No.	Part No.	Description	Symbol No.	Part No.	Description
#1 101	68-10872Z28	MANUAL,OWNER'S(AO)	103	09E39816S01	CONN,PLUG 2P
\$1 101	68-10872Z29	MANUAL,OWNER'S(GO)	104	03E39508S01	SCR,M4X40(WP)(BLK)
%1 101	68-10872Z29	MANUAL,OWNER'S(GO)	105	03E36691S01	WRENCH,2X2.3
&1 101	68-10872Z31	MANUAL,OWNER'S(AOCHR)	106	47E35195S01	WRENCH,4X4.6
\$1 102	68-10872Z30	MANUAL,OWNER'S(I,G,S)			

NOTE : #1 : For North American Model Only, \$1 : For European Model Only, %1 : For General Foreign Model Only, &1 : For Chinese Model Only, Others : Common.

Packing Method View

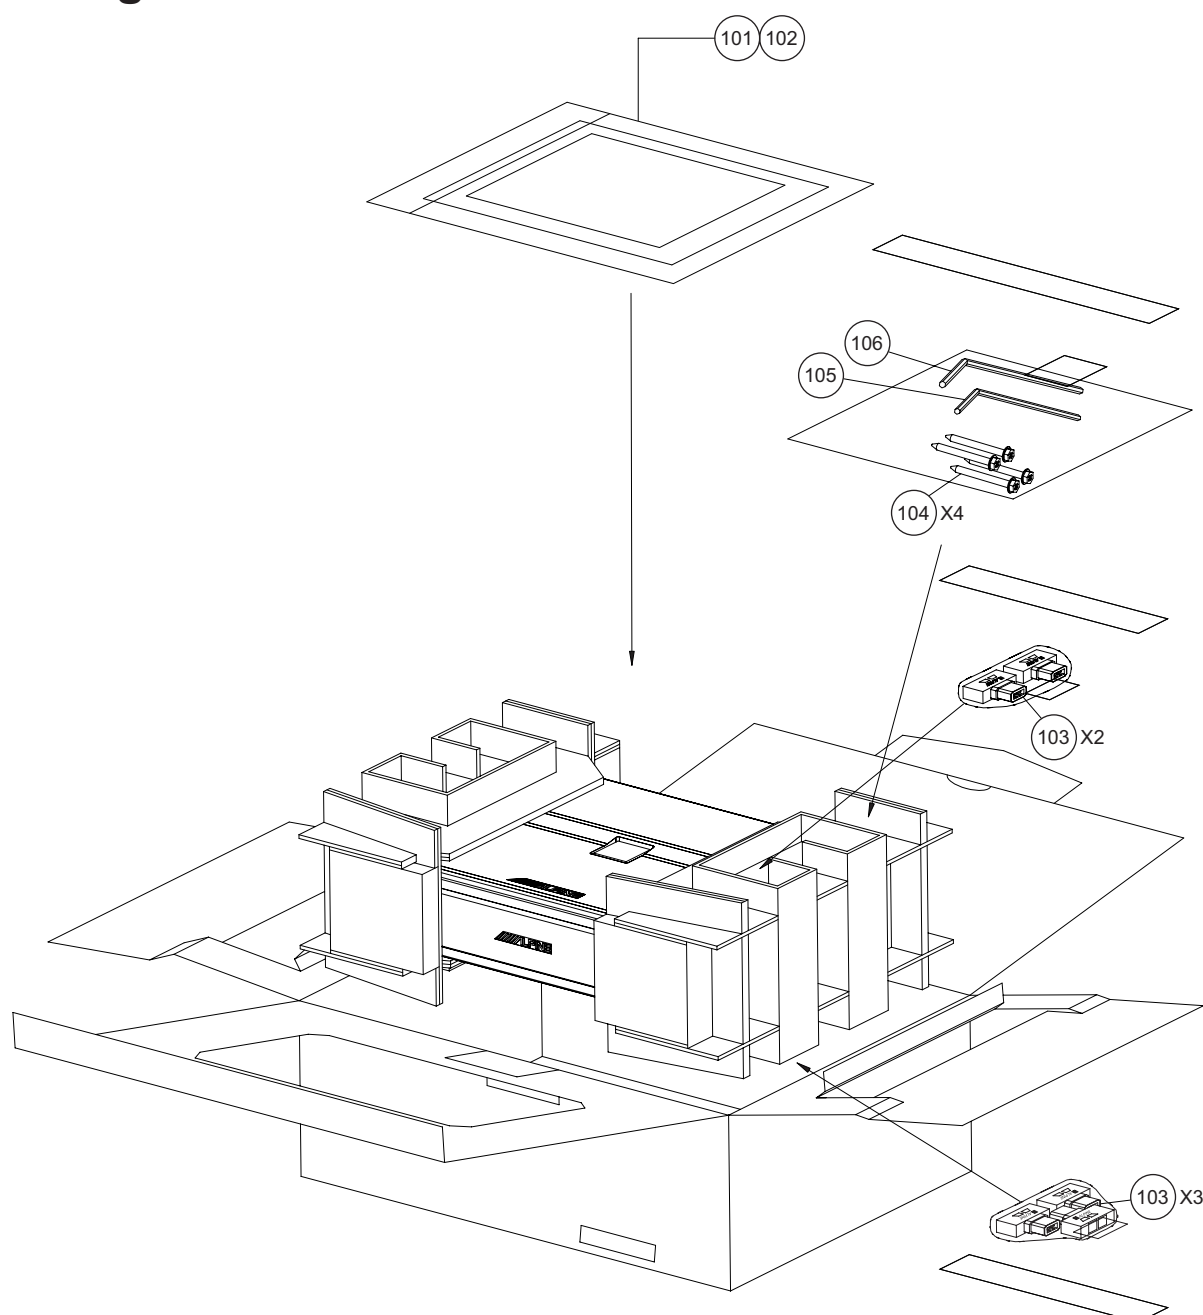

Specifications


Power Output (FULL RANGE)	(1) 20Hz, 4ohm, 1.0% T.H.D. (14.4V)	75W
	100Hz, 4ohm, 1.0% T.H.D. (14.4V)	75W
	1kHz, 4ohm, 1.0% T.H.D. (14.4V)	75W
Power Output (MONO)	(1) 20Hz, 4ohm, 1.0% T.H.D. (14.4V)	300W
	100Hz, 4ohm, 1.0% T.H.D. (14.4V)	300W
	(2) 20Hz, 2ohm, 1.0% T.H.D. (14.4V)	300W
	100Hz, 2ohm, 1.0% T.H.D. (14.4V)	300W
T.H.D. (100Hz)	(1) FULL RANGE (1W/ 4ohm (14.4V))	0.50%
	(2) MONO (1W/ 4ohm (14.4V))	0.50%
Residual Noise (Input Short)	(1) FULL RANGE	10mV
	(2) MONO	10mV
S/N Ratio (Input Short)	(1) FULL RANGE (Ref.Output 1W/ 4ohm)	66dB
	FULL RANGE (Ref.Output 75W/ 4ohm)	85dB
	(2) MONO (Ref.Output 1W/ 4ohm)	60dB
	MONO (Ref.Output 300W/ 4ohm)	85dB
Frequency Response	(1) FULL RANGE (Ref.Output 1W/ 4ohm, Ref.100Hz)	20Hz : -1.0±2dB
		20kHz : 1.0±2dB
	(2) MONO (Ref.Output 1W/ 4ohm, Ref.100Hz)	20Hz : -1.5±2dB
		200Hz : -3.0±2dB
Output Offset Voltage (No Signal)	(1) FULL RANGE	±150mV
	(2) MONO	±150mV
Remote On Voltage		6.4±1.0V
Current Drain	(1) No Signal	2.3A
	(2) 10% T.H.D., FULL RANGE/ 4ohm, MONO/ 2ohm Load	110A
	(3) Remote Current Drain	0.33±0.2mA
	(4) Back Up Current Drain	1.2mA
Input Sensitivity (Volume Position : MAX)	(1) FULL RANGE (Ref.Output 75W/ 4ohm, 100Hz)	0.2V±3dB
	(2) MONO (Ref.Output 300W/ 4ohm, 100Hz)	0.2V±3dB
Input Impedance (Reference)	(1) FULL RANGE (Ref.Output 1W/ 4ohm, 100Hz)	22.08Kohm±10%
	(2) MONO (Ref.Output 1W/ 4ohm, 100Hz)	15.58Kohm±10%
X-OVER Filter Characteristic (Ref.Output 1W/ 4ohm, 100Hz)	(1) FULL RANGE (VR 400Hz Position at 400Hz (LPF))	-3.0dB±2dB
	(2) FULL RANGE (VR 400Hz Position at 400Hz (HPF))	-3.0dB±2dB
	(3) MONO (VR 200Hz Position at 200Hz (LPF))	-3.0dB±2dB
Fuse Requirement		30A(Peak) x 2 (For Battery Line)
Power Source		DC14.4V (11~16V)
Dimensions (W x H x D)		257 x 62 x 192mm
Weight		3.11kg

NOTE : "FULL RANGE" : CH1~CH4, "MONO" : SUB W. CH


: Due to Continuing product improvement, specifications and designs are subject to change without notice.

Block Diagram

PDX-5

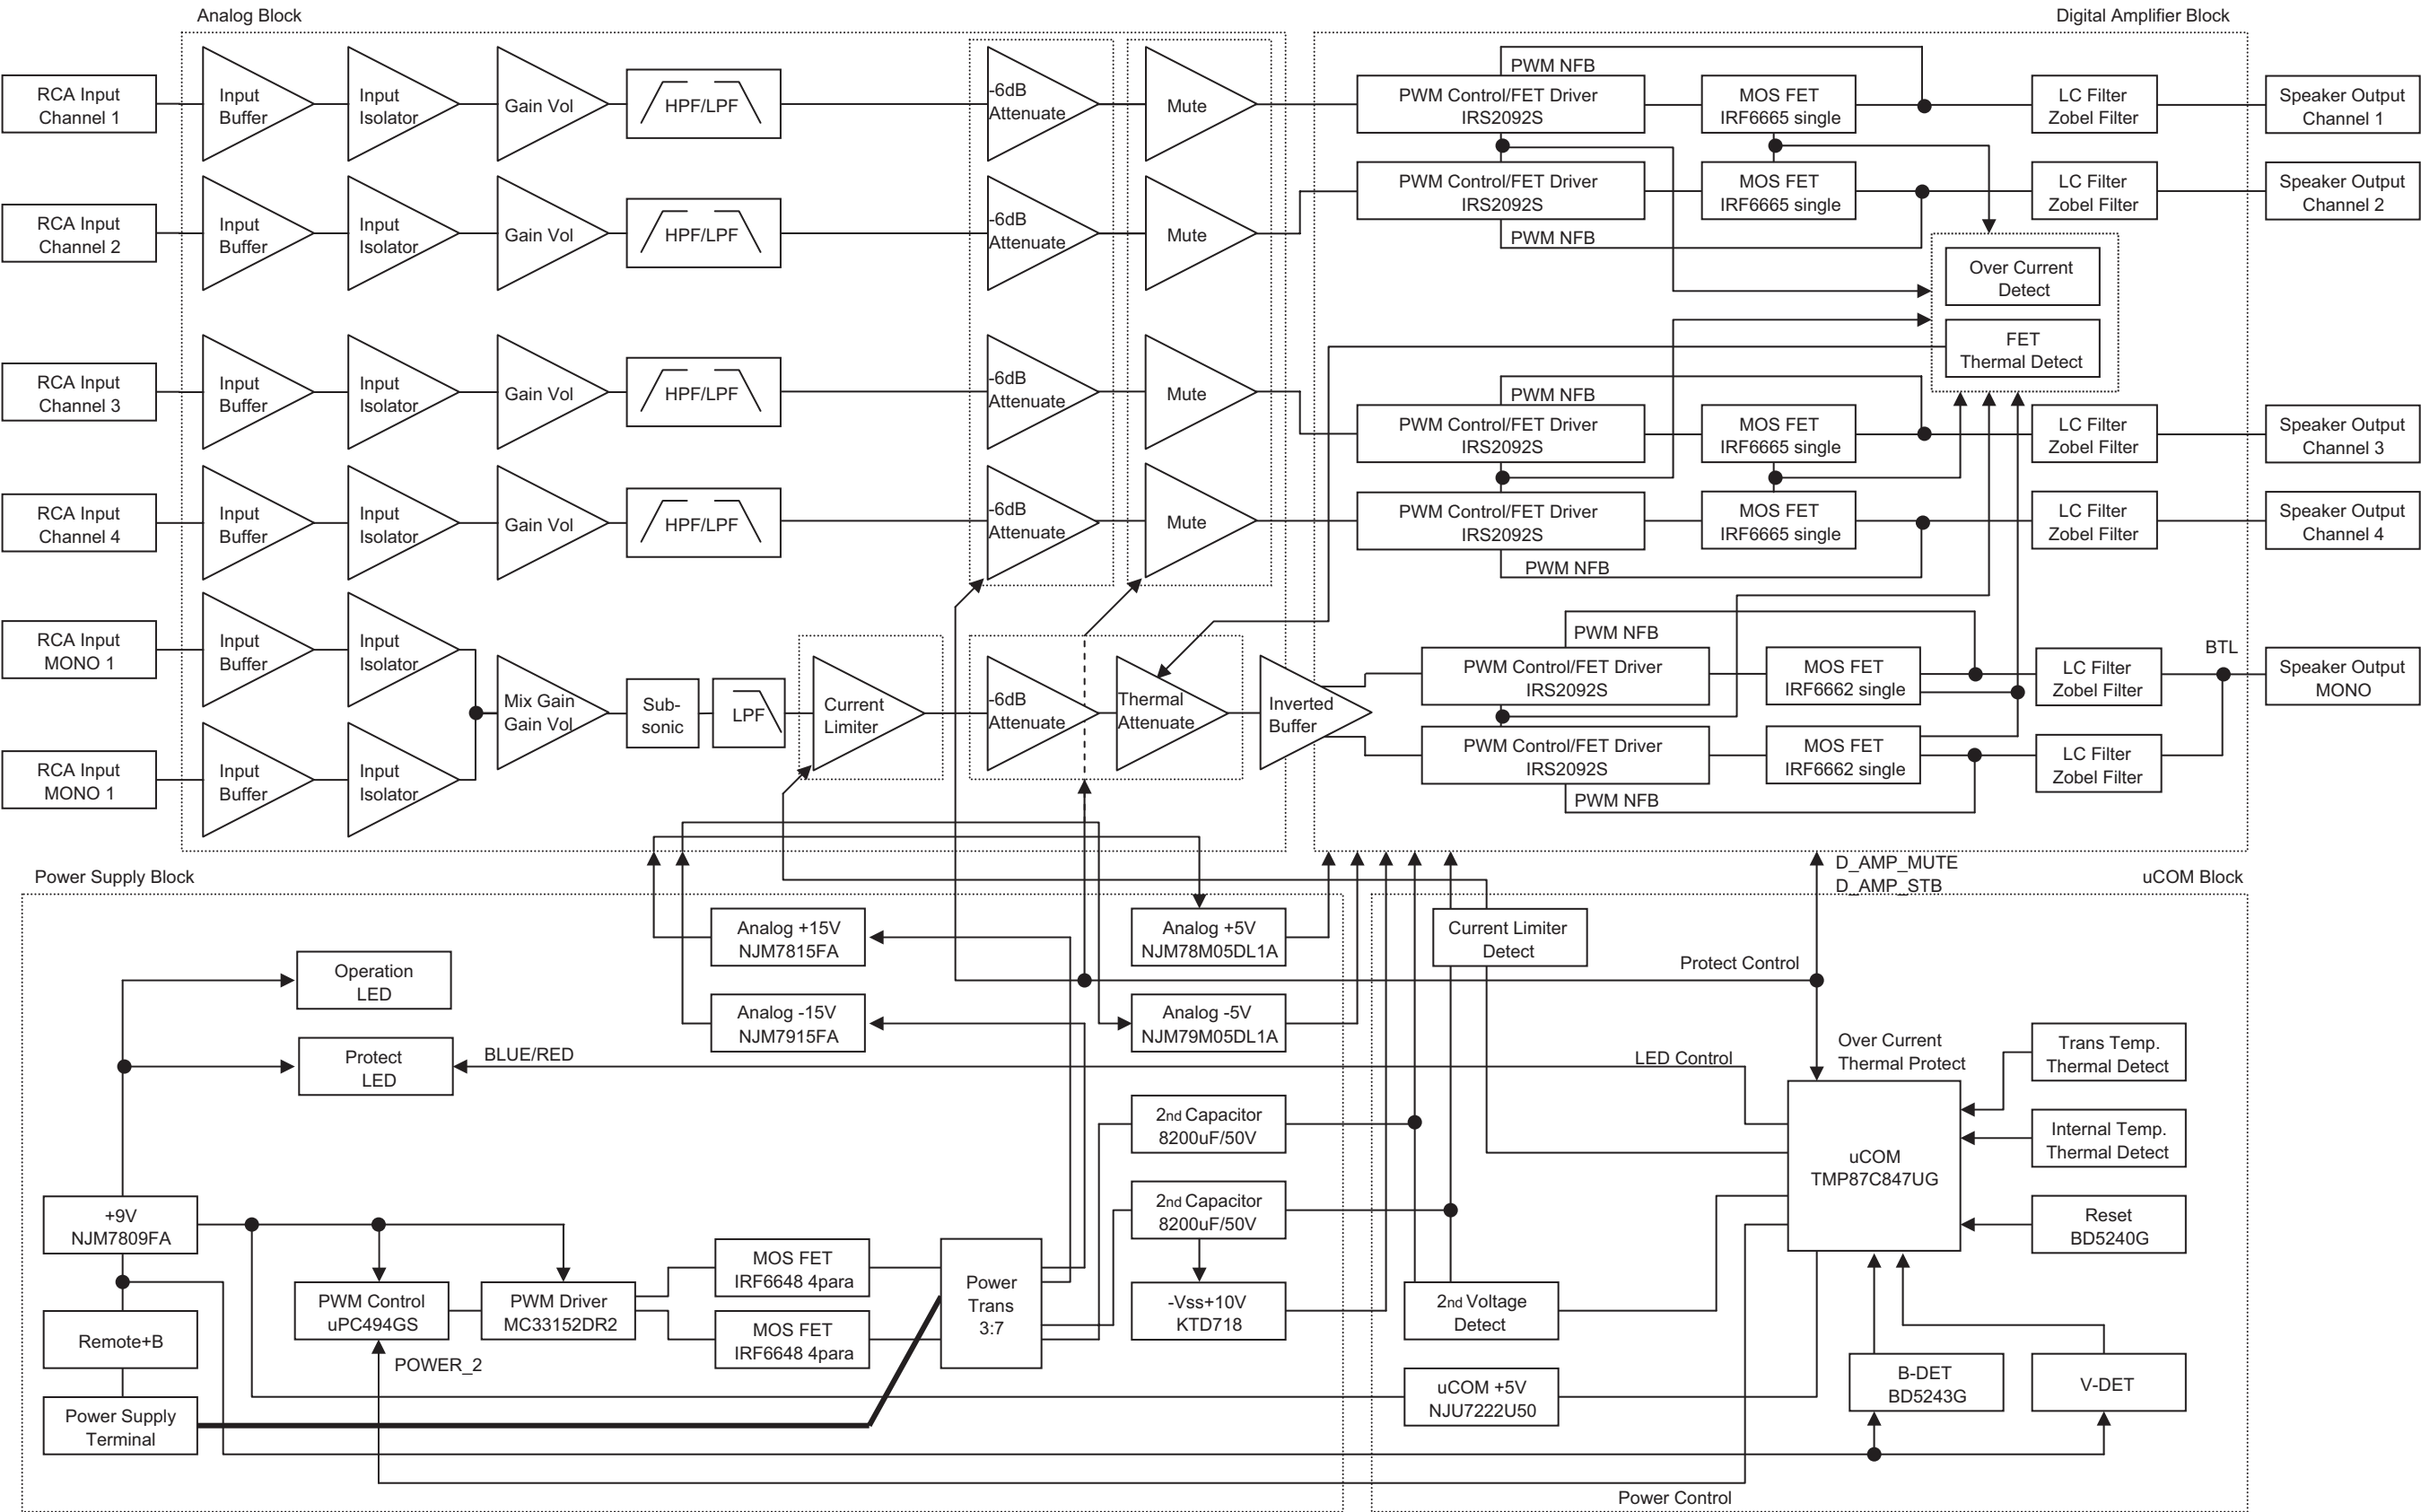


MAIN P.W.Board (Component Side View)

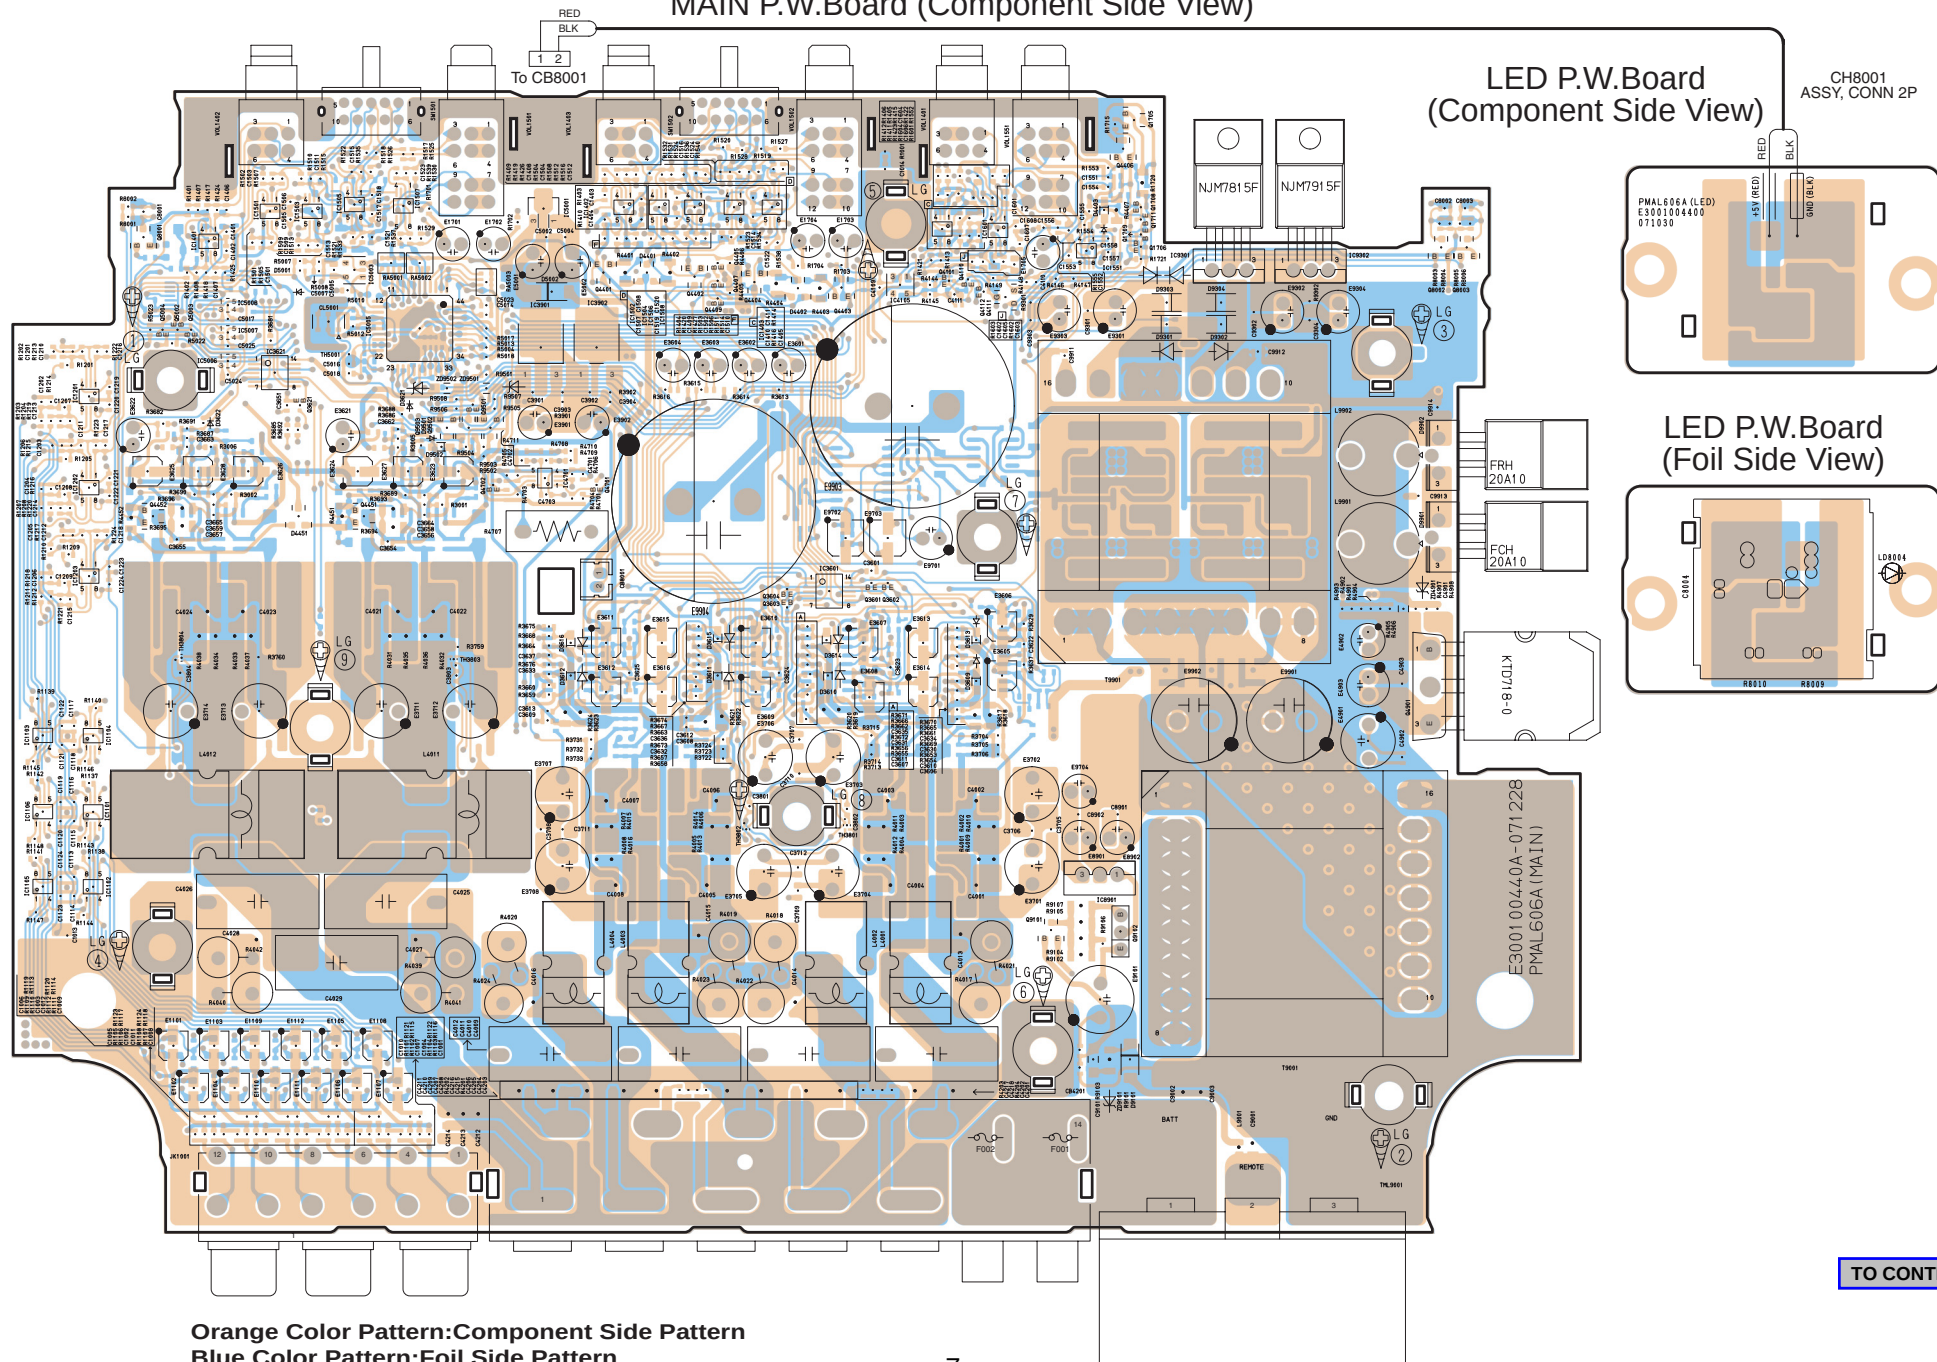

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

MAIN P.W.Board (Foil Side View)

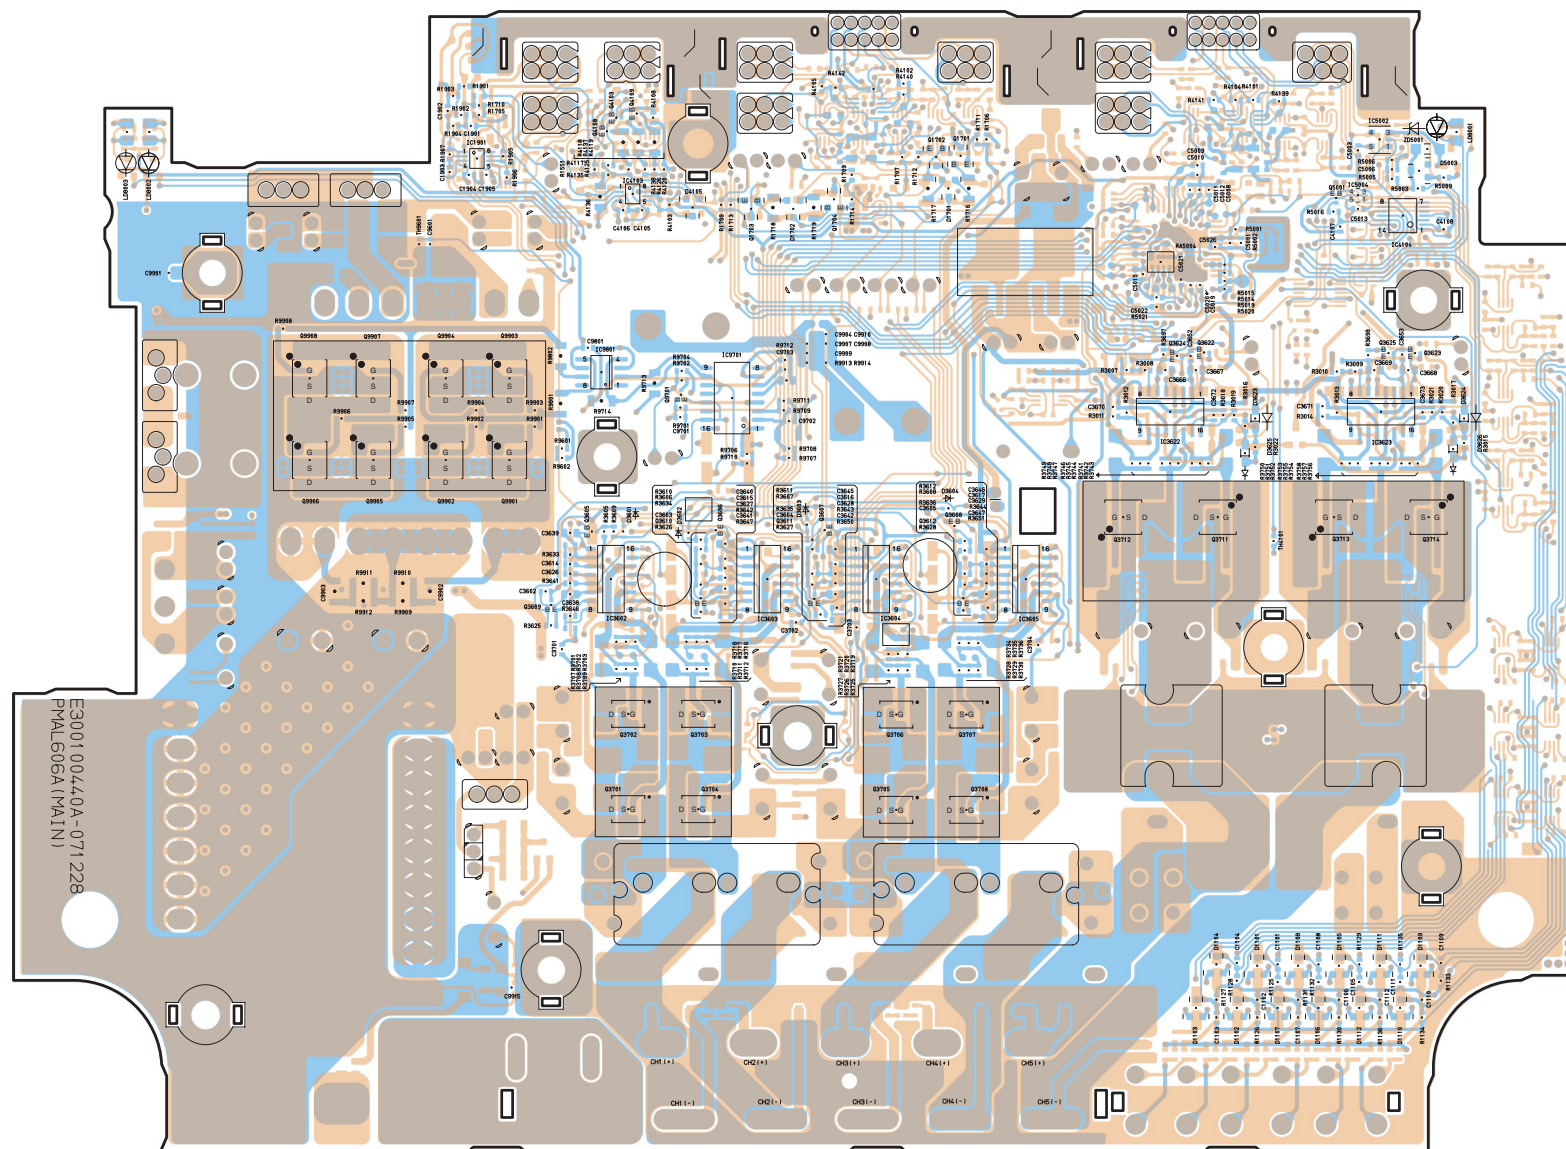


[TO CONTENTS](#)

Orange Color Pattern:Component Side Pattern
Blue Color Pattern:Foil Side Pattern

Schematic Diagram(1/5)

PDX-5

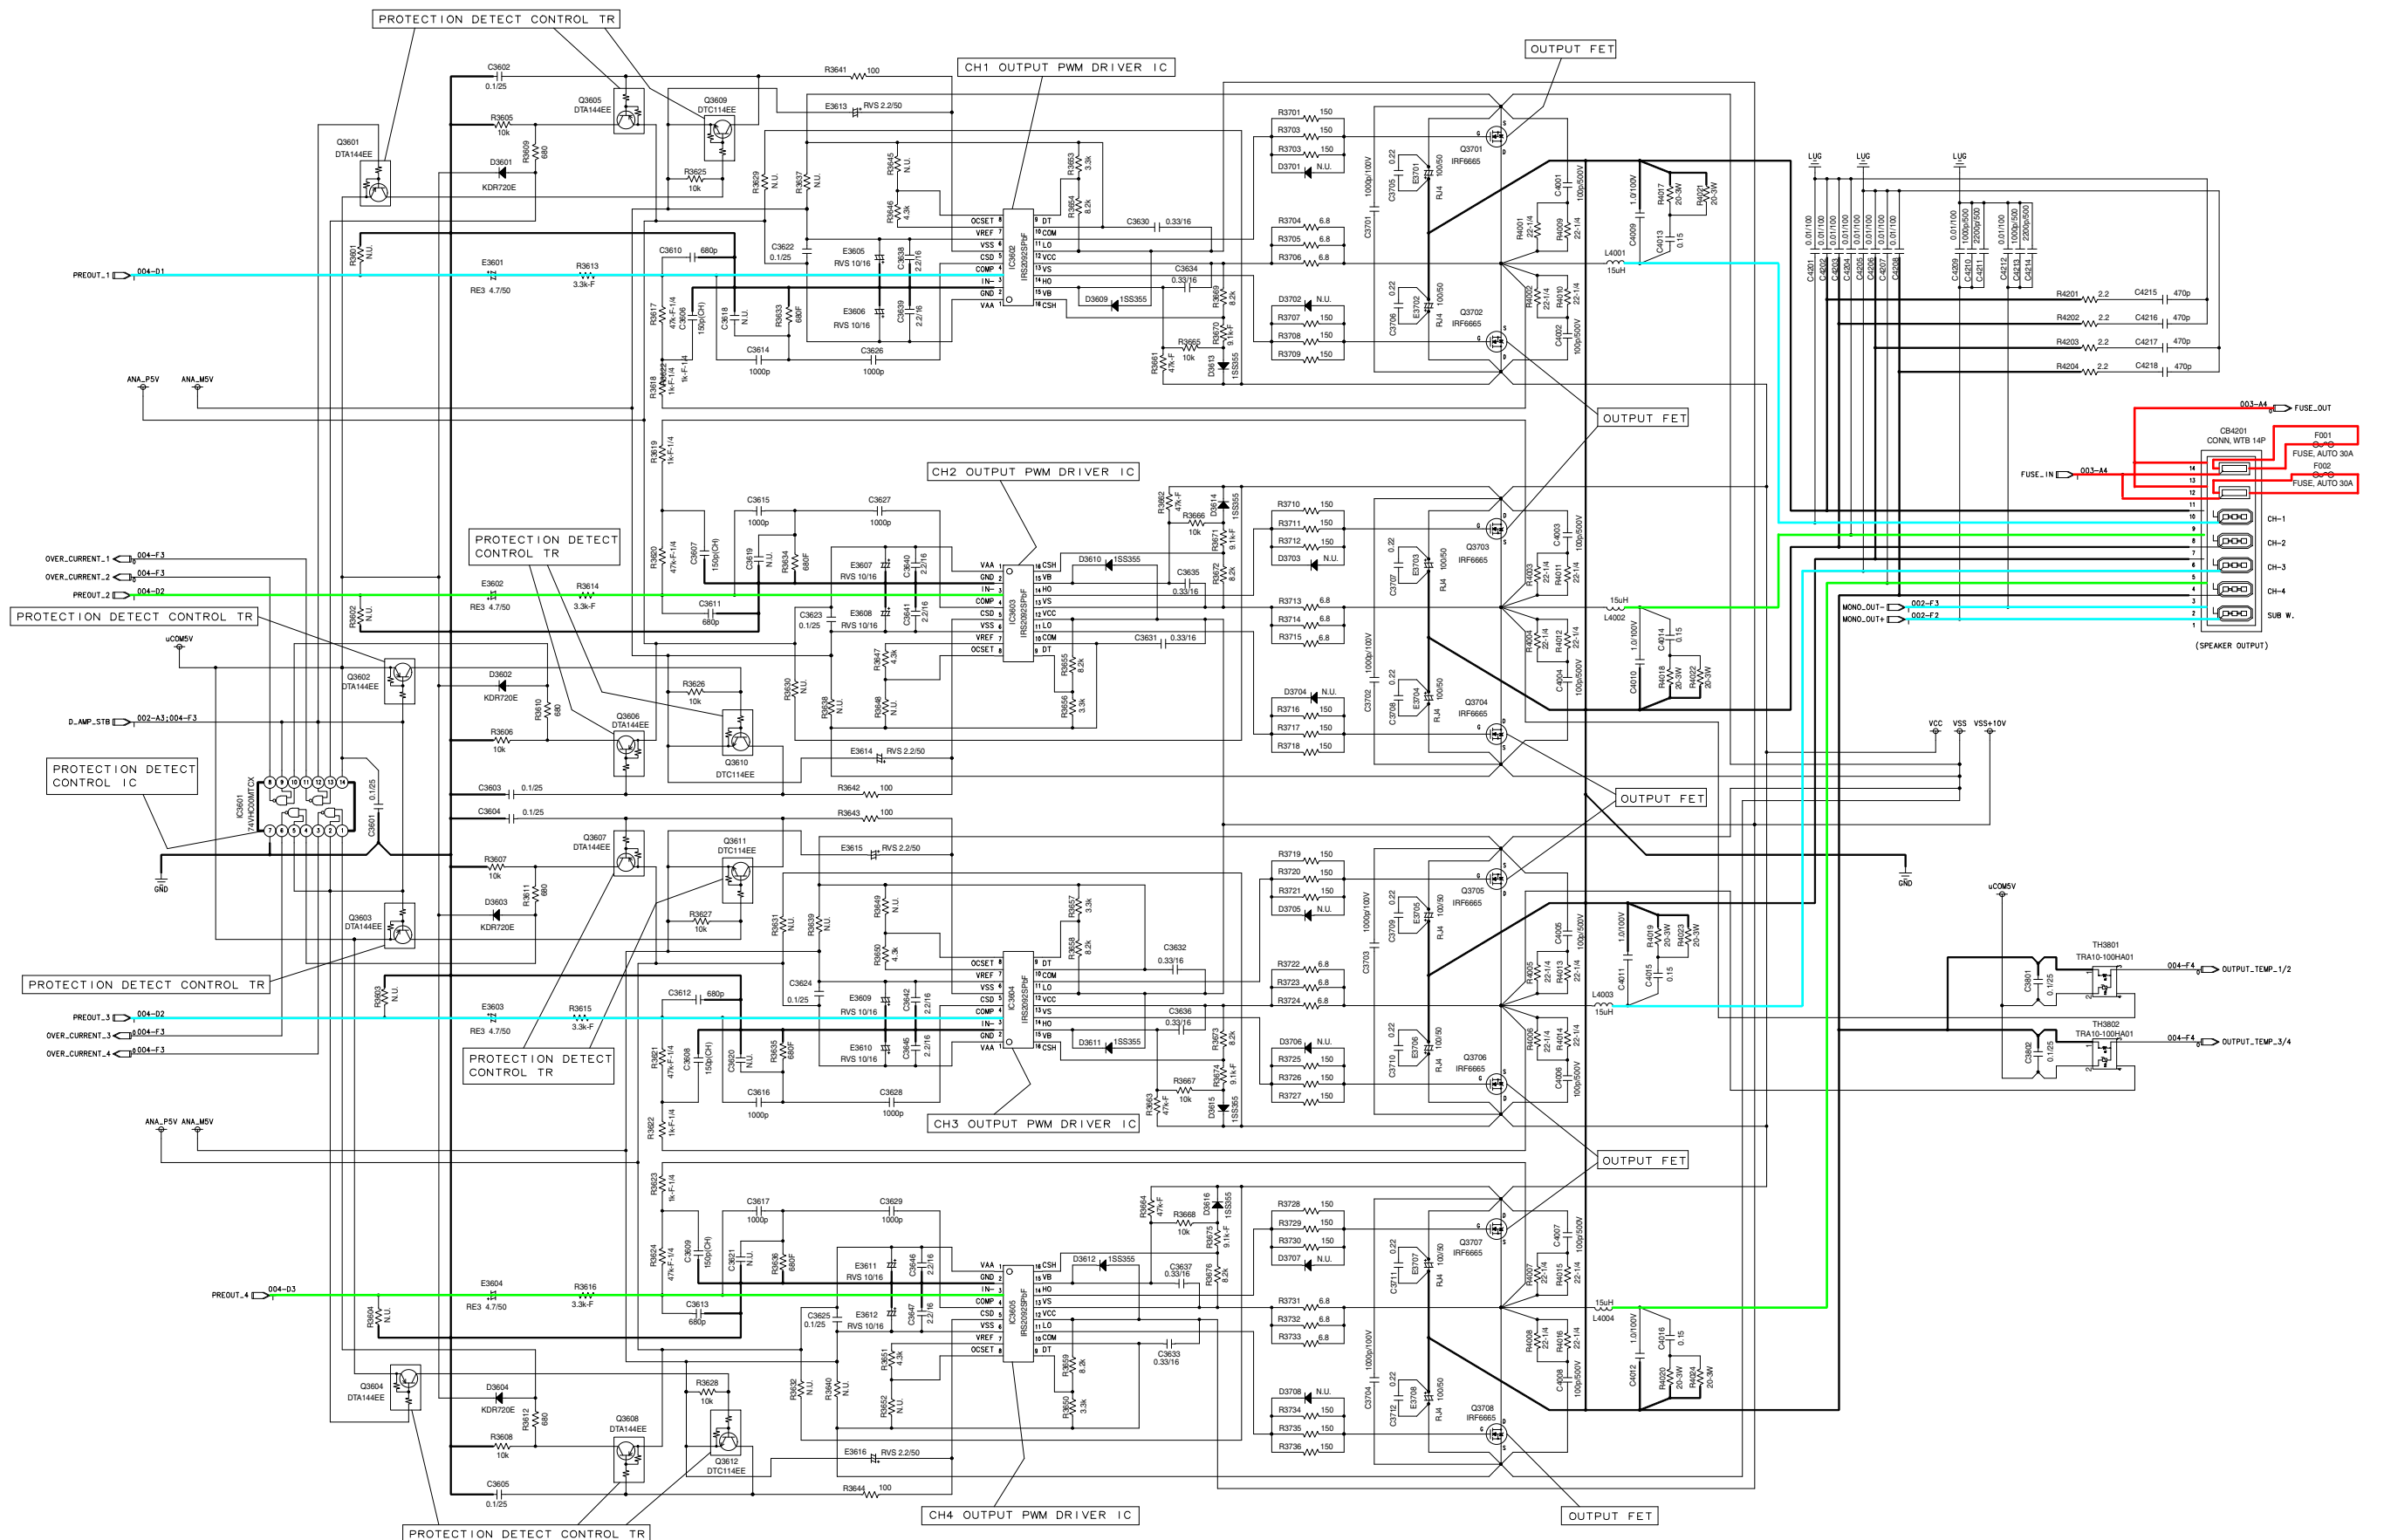


MAIN P.W.Board(1/5)
NOTE:N.U. is Not Used Parts.



Schematic Diagram(3/5)


PDX-5

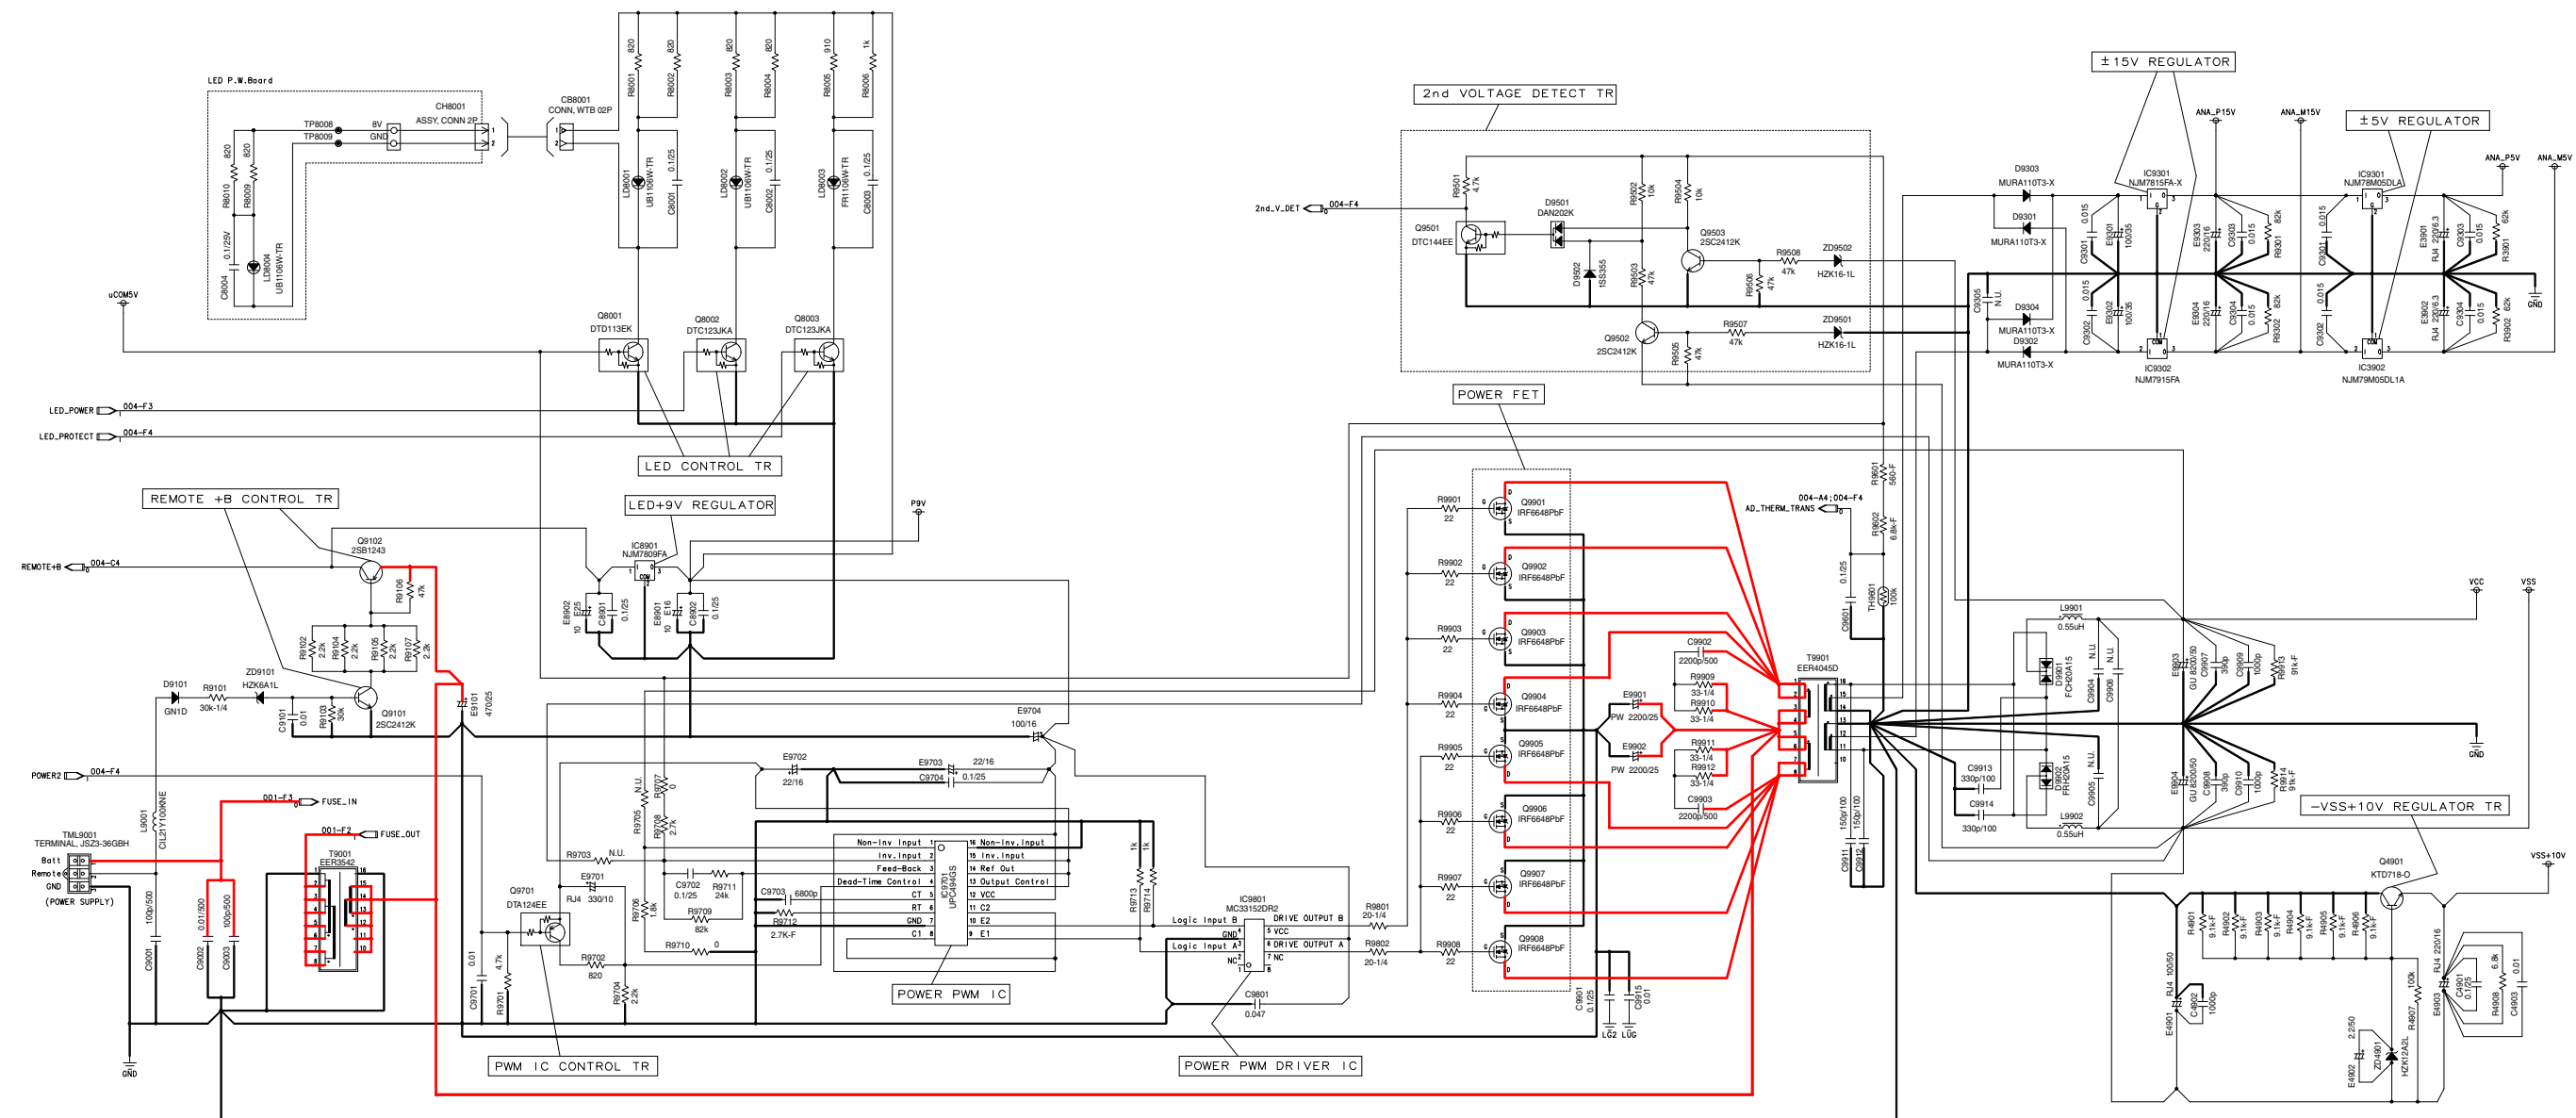

MAIN P.W.Board(3/5)
NOTE: N.U. is Not Used Parts.

Schematic Diagram(4/5)


PDX-5

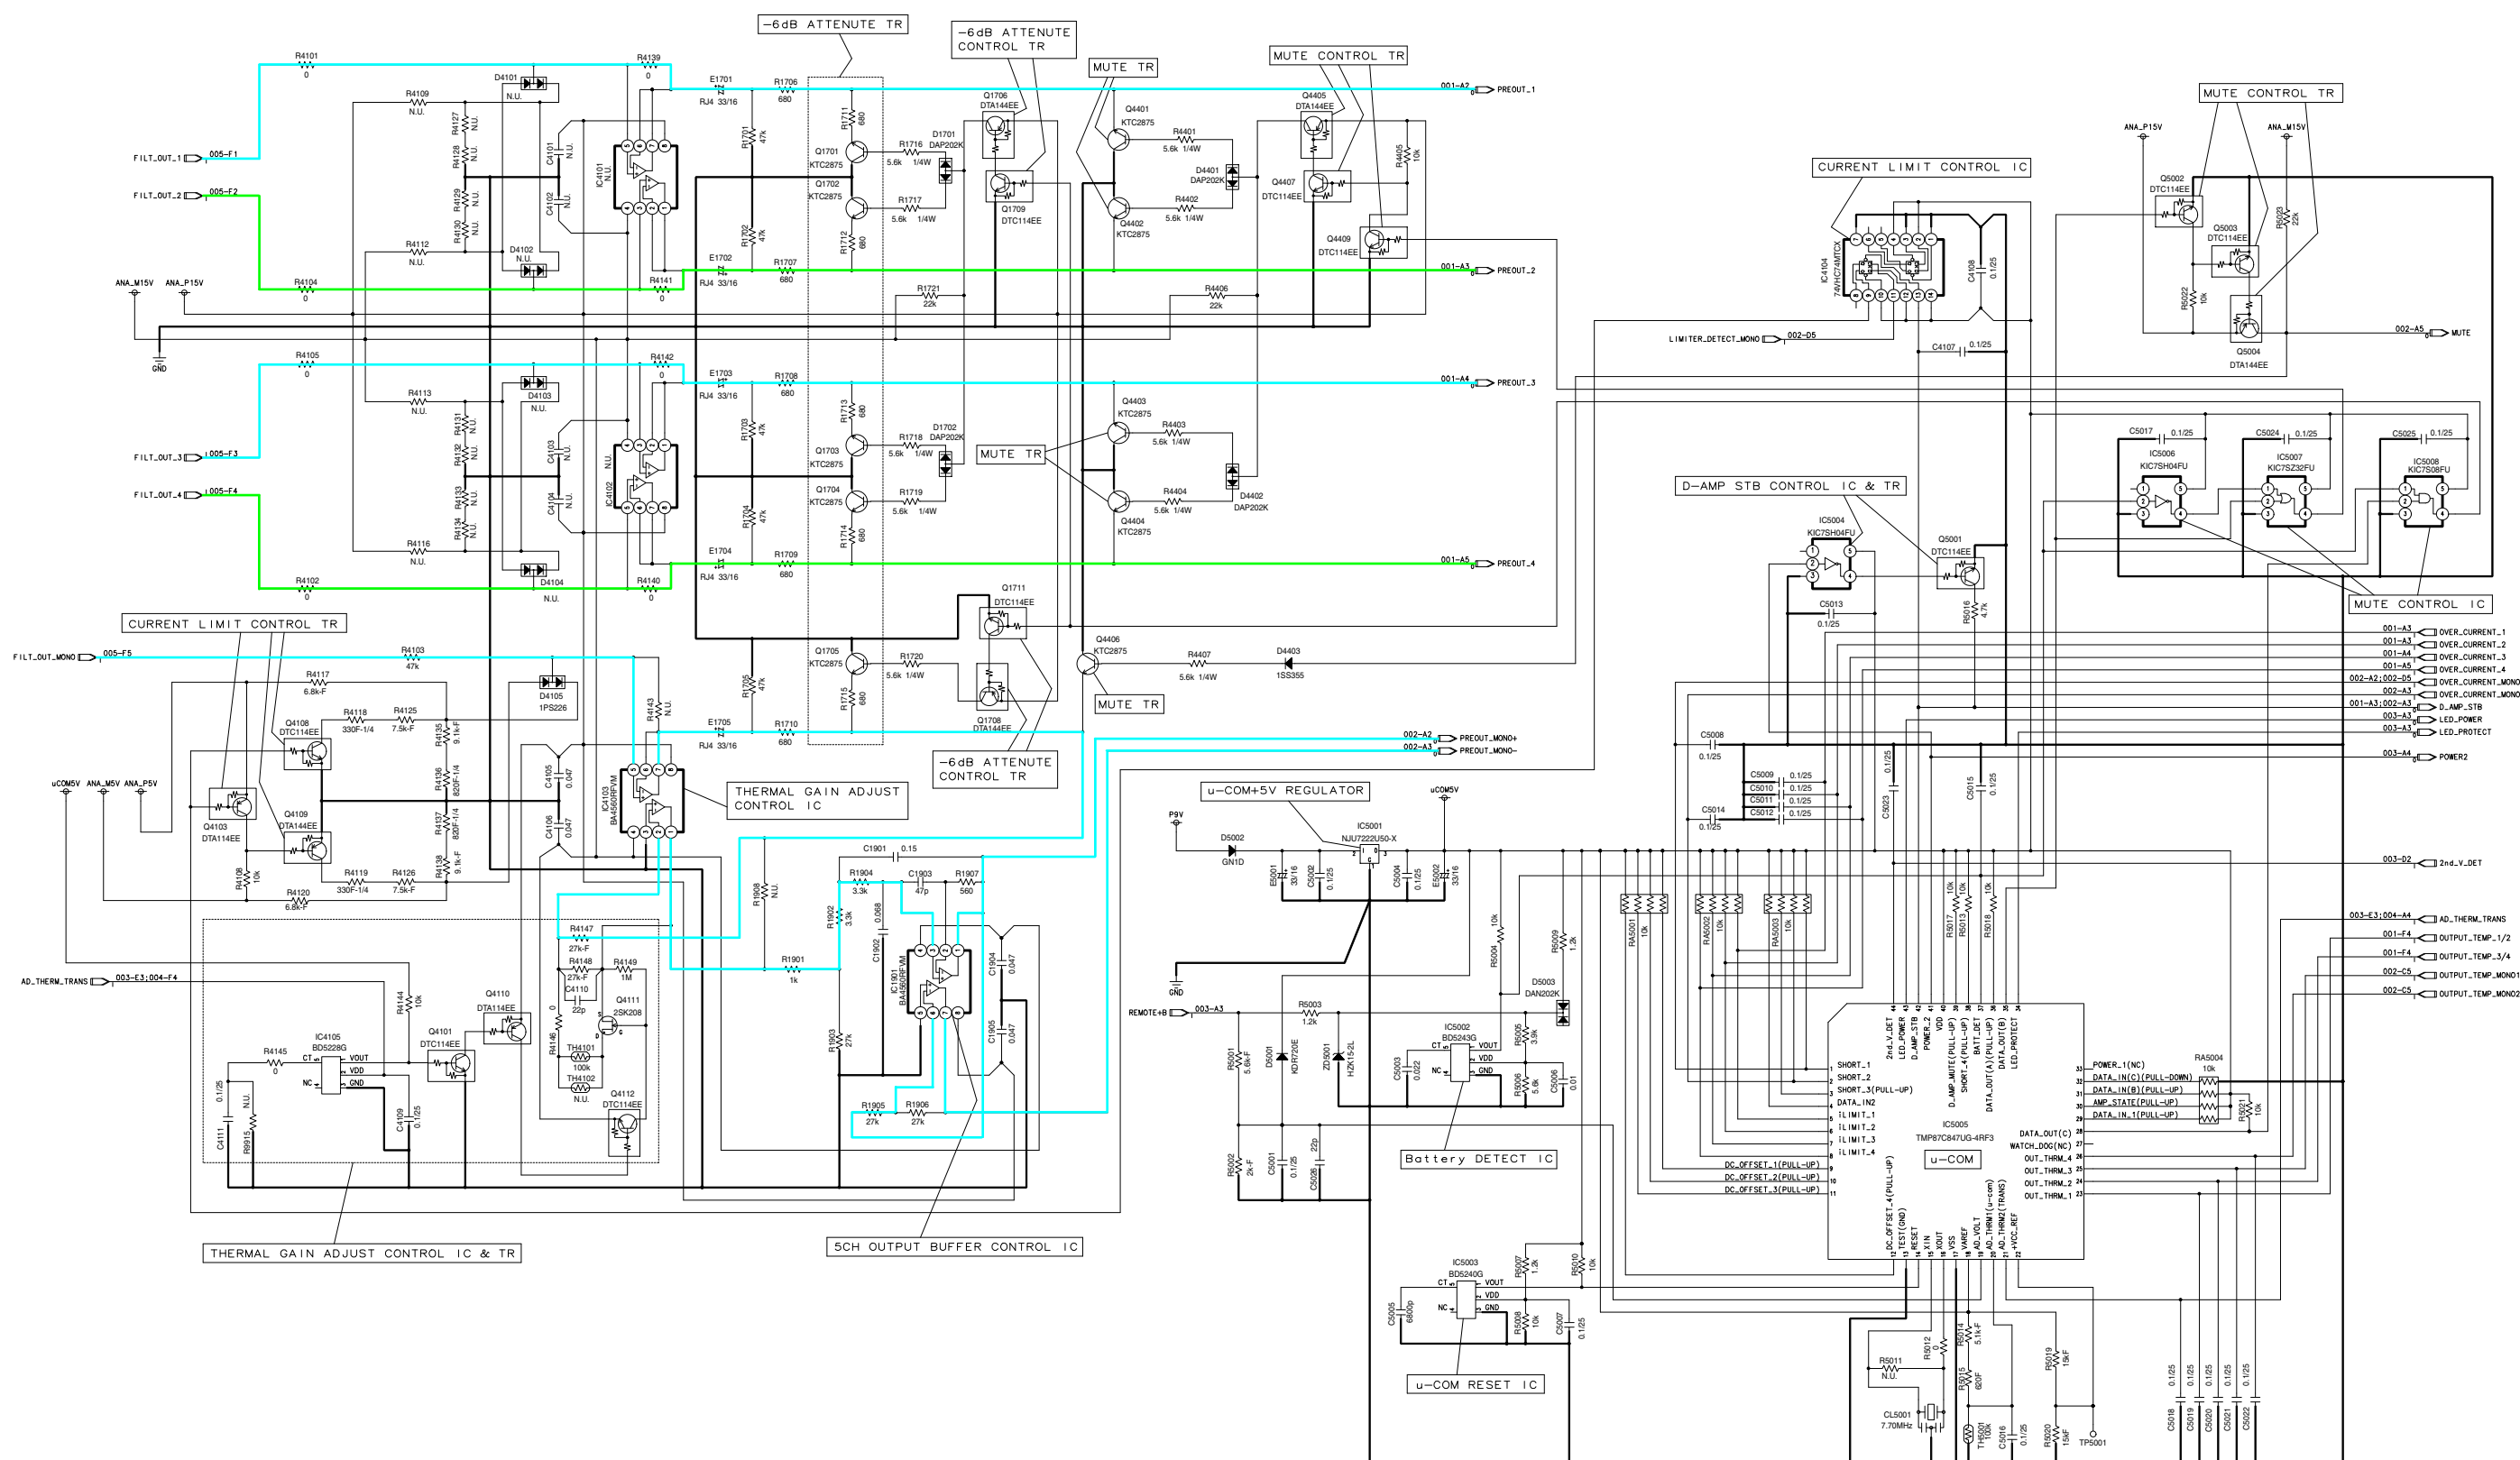

MAIN P.W.Board(4/5)
NOTE:N.U. is Not Used Parts.

Schematic Diagram(5/5)

PDX-5

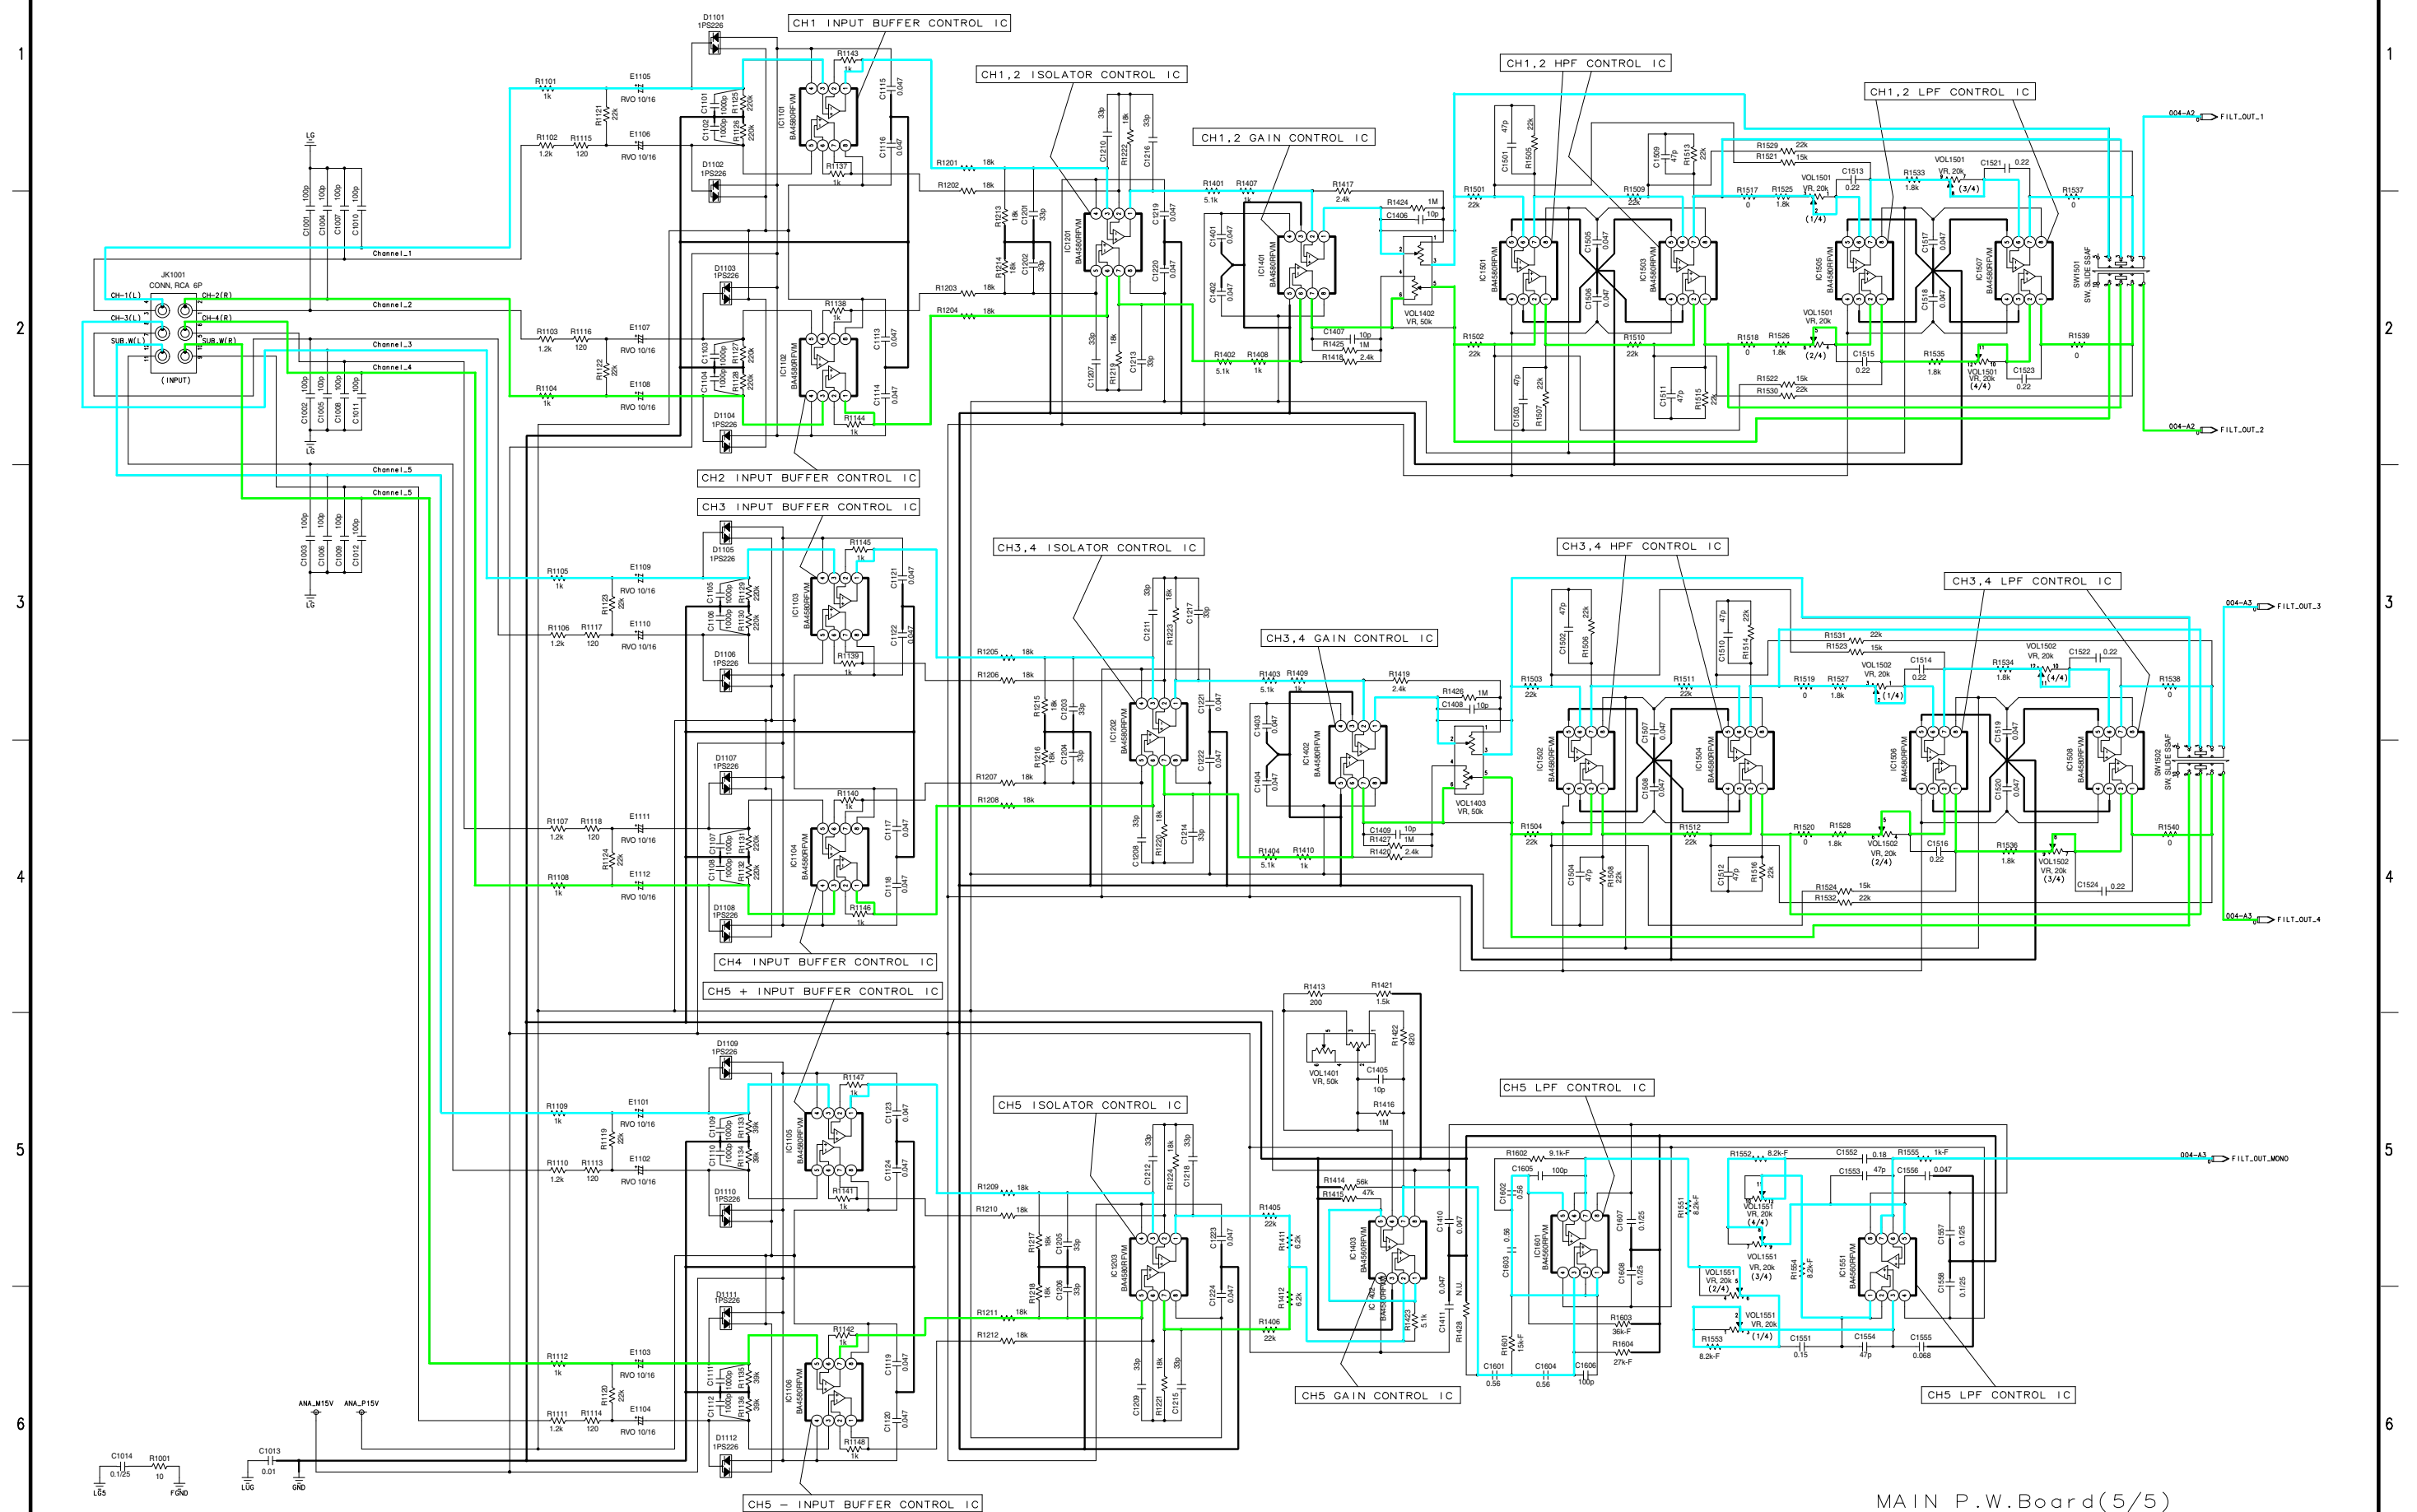

MAIN P.W.Board(5/5)
NOTE:N.U. is Not Used Parts.

TO P. W. BOARD

TO PARTS LIST

TO CONTENTS

Terminal Voltage of IC/TR

REF NO.	1	2	3	4	5	6	7	8
IC1101	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1102	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1103	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1104	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1105	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1106	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1201	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1202	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1203	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1401	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1402	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1403	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1501	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1502	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1503	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1504	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1505	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1506	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1507	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1508	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1551	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1601	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22
IC1901	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22

REF NO.	1	2	3	4	5	6	7
IC3601	0.00	5.00	5.00	0.00	5.00	5.00	0.00
	8	9	10	11	12	13	14
	5.00	5.00	0.00	5.00	5.00	0.00	5.00

REF NO.	1	2	3	4	5	6	7	8
IC3602	4.98	0.00	0.00	-0.15	4.97	-5.02	-27.92	-27.99
	9	10	11	12	13	14	15	16
	-29.89	-33.15	-28.55	-21.70	-23.05	2.24	-12.03	1.45

REF NO.	1	2	3	4	5	6	7	8
IC3603	4.98	0.00	0.00	-0.18	4.97	-5.02	-27.92	-27.99
	9	10	11	12	13	14	15	16
	-29.89	-33.15	-28.55	-21.70	-23.05	2.15	-12.03	1.50

REF NO.	1	2	3	4	5	6	7	8
IC3604	4.98	0.00	0.00	-0.15	4.97	-5.02	-27.92	-27.99
	9	10	11	12	13	14	15	16
	-29.89	-33.15	-28.55	-21.70	-23.05	2.25	-12.03	1.63

REF NO.	1	2	3	4	5	6	7	8
IC3605	4.98	0.00	0.00	-0.12	4.97	-5.02	-27.92	-27.99
	9	10	11	12	13	14	15	16
	-29.89	-33.15	-28.55	-21.70	-23.05	2.26	-12.03	1.53

[TO SCHEMATIC](#)
[TO CONTENTS](#)

REF NO.	1	2	3	4	5	6	7
IC3621	0.00	0.00	5.00	0.00	5.00	5.00	0.00
	8	9	10	11	12	13	14
	5.00	5.00	0.00	5.00	0.00	0.00	5.00

REF NO.	1	2	3	4	5	6	7	8
IC3622	4.98	0.00	0.00	-0.10	4.97	-5.02	-28.02	-21.70
	9	10	11	12	13	14	15	16
	-29.89	-33.15	-28.55	-21.70	-2.59	1.92	-12.81	1.44

REF NO.	1	2	3	4	5	6	7	8
IC3623	4.98	0.00	0.00	-0.18	4.97	-5.02	-28.02	-21.70
	9	10	11	12	13	14	15	16
	-29.89	-33.15	-28.55	-21.70	-2.59	1.94	-12.55	1.53

REF NO.	1	2	3
IC3901	15.20	0.00	4.97
IC3902	0.00	-15.31	-5.03

REF NO.	1	2	3	4	5	6	7	8
IC4103	0.00	0.00	0.00	-15.31	0.00	0.00	0.00	15.22

REF NO.	1	2	3	4	5	6	7
IC4104	0.00	5.00	0.00	5.00	0.00	5.00	0.00
	8	9	10	11	12	13	14
	5.00	0.02	5.00	0.10	5.00	5.00	5.00

REF NO.	1	2	3	4	5
IC4105	2.75	4.28	0.00	0.00	2.23

REF NO.	1	2	3	4	5	6	7	8
IC4701	-33.10	-33.98	-33.12	-33.16	-21.65	-33.12	4.99	-21.65

REF NO.	1	2	3
IC5001	0.00	8.28	5.00

REF NO.	1	2	3	4	5
IC5002	5.00	7.51	0.00	0.00	3.46
IC5003	5.00	4.46	0.00	0.00	2.40
IC5004	0.00	4.88	0.00	0.00	5.00
IC5006	0.00	4.89	0.00	0.00	5.00
IC5007	0.00	4.95	0.00	5.00	5.00
IC5008	5.00	0.00	0.00	0.00	5.00

REF NO.	1	2	3	4	5	6	7	8	9
IC5005	0.00	5.00	4.97	5.00	5.00	5.00	5.00	5.00	5.00
	10	11	12	13	14	15	16	17	18
	5.00	5.00	5.00	0.00	5.00	1.77	2.18	0.00	5.00
	19	20	21	22	23	24	25	26	27
	3.78	4.48	4.29	2.49	0.57	0.56	0.54	0.57	0.67
	28	29	30	31	32	33	34	35	36
	0.04	5.00	5.00	5.00	0.00	5.00	0.00	4.94	5.00
	37	38	39	40	41	42	43	44	
	5.00	5.00	5.00	5.00	4.87	5.00	4.78	5.00	

REF NO.	1	2	3
IC8901	14.37	0.00	9.00
IC9301	23.25	0.00	15.02
IC9302	0.00	-23.24	-15.31

REF NO.	1	2	3	4	5	6	7	8
IC9701	0.00	4.84	0.10	0.02	1.65	3.46	0.00	9.02
	9	10	11	12	13	14	15	16
	3.53	3.52	9.01	9.01	5.00	5.00	5.00	0.00

REF NO.	1	2	3	4	5	6	7	8
IC9801	0.00	3.52	0.00	3.53	4.08	9.01	4.08	0.00

REF NO.	E	C	B
Q1701	0.00	0.00	-0.81
Q1702	0.00	0.00	-0.81
Q1703	0.00	0.00	-0.81
Q1704	0.00	0.00	-0.81
Q1705	0.00	0.00	0.00
Q1706	15.20	-15.28	15.06
Q1708	15.20	0.00	15.06
Q1709	0.00	15.06	0.00
Q1711	0.00	15.06	0.00
Q3601	5.00	-5.02	5.00
Q3602	5.00	-5.02	5.00
Q3603	5.00	-5.02	5.00
Q3604	5.00	-5.02	5.00
Q3605	4.97	0.00	4.97
Q3606	4.97	0.00	4.97
Q3607	4.97	0.00	4.97
Q3608	4.97	0.00	4.97
Q3609	-5.02	4.97	-5.02
Q3610	-5.02	4.97	-5.02
Q3611	-5.02	4.97	-5.02
Q3612	-5.02	4.97	-5.02
Q3621	5.00	-5.03	5.00
Q3622	4.97	0.00	4.97
Q3623	4.97	0.00	4.97
Q3624	-5.02	4.97	-5.02
Q3625	-5.02	4.97	-5.02
Q4101	0.00	0.03	2.75
Q4103	5.00	4.95	0.02
Q4108	0.00	-2.97	0.01
Q4109	0.00	-2.97	4.95
Q4110	15.21	15.18	0.03
Q4112	-15.32	-15.31	15.18
Q4401	0.00	0.00	-0.09
Q4402	0.00	0.00	-0.09
Q4403	0.00	0.00	-0.09
Q4404	0.00	0.00	-0.09
Q4405	15.21	-15.27	15.06
Q4406	0.00	0.00	-0.21
Q4407	0.00	15.06	0.02
Q4409	0.00	0.02	5.00
Q4451	0.00	0.00	-0.09

REF NO.	E	C	B
Q4452	0.00	0.00	-0.06
Q4701	0.01	0.00	-33.10
Q4702	5.00	0.00	5.00
Q4901	-21.06	0.00	-21.68
Q5001	0.00	5.00	0.00
Q5002	0.00	0.02	4.94
Q5003	0.00	15.07	0.02
Q5004	15.21	-15.28	15.07
Q8001	0.00	0.03	4.99
Q8002	0.00	0.04	4.78
Q8003	0.00	7.64	0.00
Q9101	0.00	0.18	0.73
Q9102	14.39	14.37	13.68
Q9501	0.00	4.99	0.00
Q9502	0.00	0.02	0.66
Q9503	-33.15	-33.13	-32.50
Q9701	5.00	0.03	4.88

REF NO.	G	D	S
Q3701	-28.56	-2.43	-33.16
Q3702	2.25	33.20	-2.43
Q3703	2.25	33.20	-2.43
Q3704	-28.56	-2.43	-33.16
Q3705	-28.56	-2.43	-33.16
Q3706	2.25	33.20	-2.43
Q3707	2.25	33.20	-2.43
Q3708	-28.56	-2.43	-33.16
Q3711	2.03	33.20	-23.86
Q3712	-28.40	-2.64	-33.15
Q3713	-28.40	-2.64	-33.15
Q3714	2.03	33.20	-23.86
Q4111	-15.31	0.00	0.00
Q9901	4.09	14.27	0.00
Q9902	4.09	14.27	0.00
Q9903	4.09	14.27	0.00
Q9904	4.09	14.27	0.00
Q9905	4.09	14.27	0.00
Q9906	4.09	14.27	0.00
Q9907	4.09	14.27	0.00
Q9908	4.09	14.27	0.00

[Measuring Conditions]

1. Power Supply Voltage : DC 14.4V
2. Measuring Meter : Digital Multi Voltmeter
3. Measuring Point Reference : Between GND
4. Measuring Condition : No Signal Input


[TO SCHEMATIC](#)
[TO CONTENTS](#)

Description of IC Terminal

TMP87C847UG : IC5005

No.	Symbol	I/O	Terminal Description
1	SHORT_1	I	Output overcurrent detection terminal. (CH5 +)
2	SHORT_2	I	Output overcurrent detection terminal. (CH5 -)
3	SHORT_3(PULL-UP)	-	Pull-up connect terminal.
4	DATA_IN2	I	Level A0 compulsion input detection terminal.
5	iLIMIT_1	I	Output overcurrent detection terminal. (CH1)
6	iLIMIT_2	I	Output overcurrent detection terminal. (CH2)
7	iLIMIT_3	I	Output overcurrent detection terminal. (CH3)
8	iLIMIT_4	I	Output overcurrent detection terminal. (CH4)
9	DC_OFFSET_1(PULL-UP)	-	Pull-up connect terminal.
10	DC_OFFSET_2(PULL-UP)		
11	DC_OFFSET_3(PULL-UP)		
12	DC_OFFSET_4(PULL-UP)		
13	TEST(GND)	-	GND connect terminal.
14	RESET	I	RESET terminal.
15	XIN	I	Crystal oscillator connection terminal.
16	XOUT	O	
17	VSS	-	GND connect terminal. (A/D converter basis GND)
18	VAREF	-	Reference voltage of A/D converter terminal.
19	AD_VOLT	I	Power supply voltage detection terminal. (A/D input)
20	AD_THRM1(u-com)	I	Ambient temperature of u-COM detection terminal. (A/D input)
21	AD_THRM2(TRANS)	I	TRANS temperature detection terminal. (A/D input)
22	+VCC_REF	I	The second voltage reference value input terminal. (A/D input)
23	OUT_THRM_1	I	Output element temperature detection terminal. (CH1/2) (A/D input)
24	OUT_THRM_2	I	Output element temperature detection terminal. (CH3/4) (A/D input)
25	OUT_THRM_3	I	Output element temperature detection terminal. (CH5 +) (A/D input)
26	OUT_THRM_4	I	Output element temperature detection terminal. (CH5 -) (A/D input)
27	WATCH_DOG(NC)	-	No connect terminal.
28	DATA_OUT(C)	O	-6dB Level Down circuit control terminal.
29	DATA_IN_1(PULL-UP)	-	Pull-up connect terminal.
30	AMP_STATE(PULL-UP)		
31	DATA_IN(B)(PULL-UP)		
32	DATA_IN(C)(PULL-DOWN)	-	Pull-down connect terminal.
33	POWER_1(NC)	-	No connect terminal.
34	LED_PROTECT	O	AMP safeguard state display LED control terminal.
35	DATA_OUT(B)	O	MUTE circuit control terminal.
36	DATA_OUT(A)(PULL-UP)	-	Pull-up connect terminal.
37	BATT_DET	I	BATT-DET terminal.
38	SHORT_4(PULL-UP)	-	Pull-up connect terminal.
39	D_AMP_MUTE(PULL-UP)		
40	VDD	-	Power supply terminal.
41	POWER_2	O	UPC494 control terminal.
42	D_AMP_STB	O	PWM device STANDBY control terminal.
43	LED_POWER	O	AMP power supply state display LED control terminal.
44	2nd_V_DET	I	The second voltage detection terminal.

Exploded View (Cabinet)

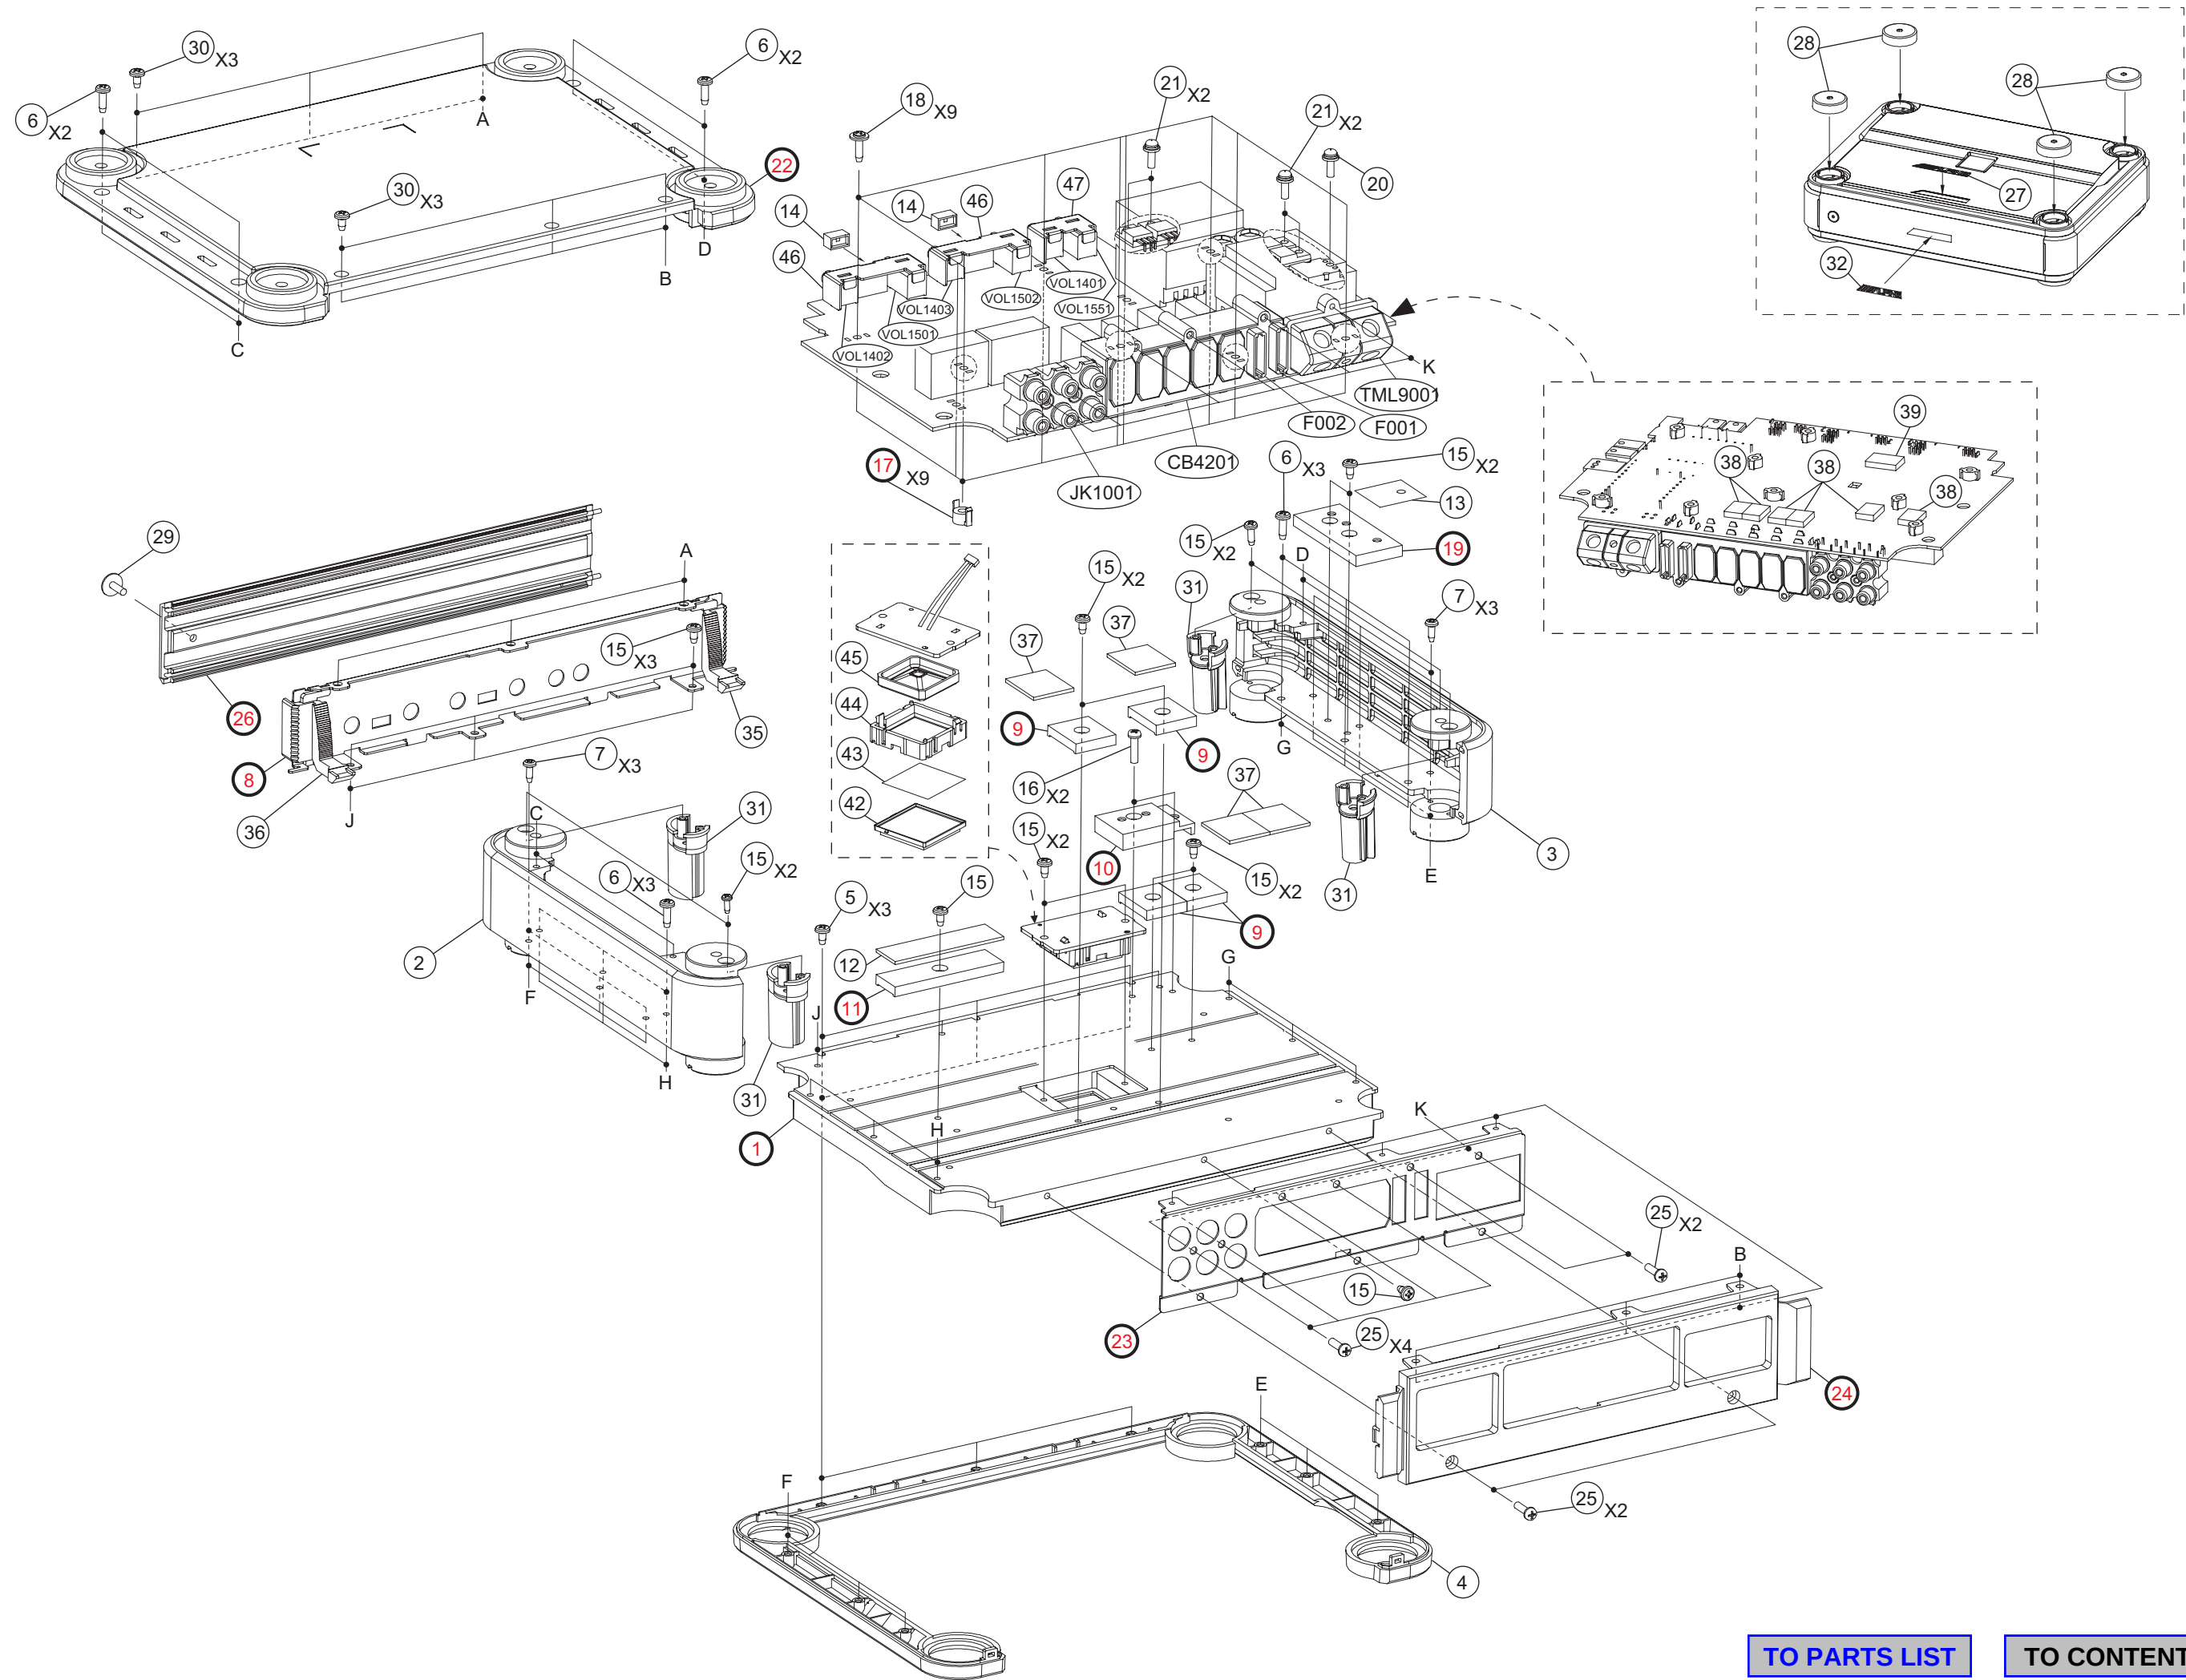

[TO PARTS LIST](#)

[TO CONTENTS](#)

Electrical Parts List

* Each parts on P.W.Board are described in order of the reference number.

=====MAIN P.W.Board

C1001	08E37117S01	CAP,CER. 100pF/50V
C1002	08E37117S01	CAP,CER. 100pF/50V
C1003	08E37117S01	CAP,CER. 100pF/50V
C1004	08E37117S01	CAP,CER. 100pF/50V
C1005	08E37117S01	CAP,CER. 100pF/50V
C1006	08E37117S01	CAP,CER. 100pF/50V
C1007	08E37117S01	CAP,CER. 100pF/50V
C1008	08E37117S01	CAP,CER. 100pF/50V
C1009	08E37117S01	CAP,CER. 100pF/50V
C1010	08E37117S01	CAP,CER. 100pF/50V
C1011	08E37117S01	CAP,CER. 100pF/50V
C1012	08E37117S01	CAP,CER. 100pF/50V
C1013	08E37120S01	CAP,CER. 0.01uF/50V
C1014	08E37122S01	CAP,CER. 0.1uF/25V
C1101	08E37153S01	CAP,CER. 1000pF/50V
C1102	08E37153S01	CAP,CER. 1000pF/50V
C1103	08E37153S01	CAP,CER. 1000pF/50V
C1104	08E37153S01	CAP,CER. 1000pF/50V
C1105	08E37153S01	CAP,CER. 1000pF/50V
C1106	08E37153S01	CAP,CER. 1000pF/50V
C1107	08E37153S01	CAP,CER. 1000pF/50V
C1108	08E37153S01	CAP,CER. 1000pF/50V
C1109	08E37153S01	CAP,CER. 1000pF/50V
C1110	08E37153S01	CAP,CER. 1000pF/50V
C1111	08E37153S01	CAP,CER. 1000pF/50V
C1112	08E37153S01	CAP,CER. 1000pF/50V
C1113	08E37267S01	CAP,CER. 0.047uF/25V
C1114	08E37267S01	CAP,CER. 0.047uF/25V
C1115	08E37267S01	CAP,CER. 0.047uF/25V
C1116	08E37267S01	CAP,CER. 0.047uF/25V
C1117	08E37267S01	CAP,CER. 0.047uF/25V
C1118	08E37267S01	CAP,CER. 0.047uF/25V
C1119	08E37267S01	CAP,CER. 0.047uF/25V
C1120	08E37267S01	CAP,CER. 0.047uF/25V
C1121	08E37267S01	CAP,CER. 0.047uF/25V
C1122	08E37267S01	CAP,CER. 0.047uF/25V
C1123	08E37267S01	CAP,CER. 0.047uF/25V
C1124	08E37267S01	CAP,CER. 0.047uF/25V
C1201	08E37115S01	CAP,CER. 33pF/50V
C1202	08E37115S01	CAP,CER. 33pF/50V
C1203	08E37115S01	CAP,CER. 33pF/50V
C1204	08E37115S01	CAP,CER. 33pF/50V
C1205	08E37115S01	CAP,CER. 33pF/50V
C1206	08E37115S01	CAP,CER. 33pF/50V
C1207	08E37115S01	CAP,CER. 33pF/50V
C1208	08E37115S01	CAP,CER. 33pF/50V
C1209	08E37115S01	CAP,CER. 33pF/50V
C1210	08E37115S01	CAP,CER. 33pF/50V
C1211	08E37115S01	CAP,CER. 33pF/50V
C1212	08E37115S01	CAP,CER. 33pF/50V
C1213	08E37115S01	CAP,CER. 33pF/50V

C1214	08E37115S01	CAP,CER. 33pF/50V
C1215	08E37115S01	CAP,CER. 33pF/50V
C1216	08E37115S01	CAP,CER. 33pF/50V
C1217	08E37115S01	CAP,CER. 33pF/50V
C1218	08E37115S01	CAP,CER. 33pF/50V
C1219	08E37267S01	CAP,CER. 0.047uF/25V
C1220	08E37267S01	CAP,CER. 0.047uF/25V
C1221	08E37267S01	CAP,CER. 0.047uF/25V
C1222	08E37267S01	CAP,CER. 0.047uF/25V
C1223	08E37267S01	CAP,CER. 0.047uF/25V
C1224	08E37267S01	CAP,CER. 0.047uF/25V
C1401	08E37267S01	CAP,CER. 0.047uF/25V
C1402	08E37267S01	CAP,CER. 0.047uF/25V
C1403	08E37267S01	CAP,CER. 0.047uF/25V
C1404	08E37267S01	CAP,CER. 0.047uF/25V
C1405	08E35408S01	CAP,CER. 10pF/50V
C1406	08E35408S01	CAP,CER. 10pF/50V
C1407	08E35408S01	CAP,CER. 10pF/50V
C1408	08E35408S01	CAP,CER. 10pF/50V
C1409	08E35408S01	CAP,CER. 10pF/50V
C1410	08E37267S01	CAP,CER. 0.047uF/25V
C1411	08E37267S01	CAP,CER. 0.047uF/25V
C1501	08E39649S01	CAP,CER. 47pF/50V
C1502	08E39649S01	CAP,CER. 47pF/50V
C1503	08E39649S01	CAP,CER. 47pF/50V
C1504	08E39649S01	CAP,CER. 47pF/50V
C1505	08E37267S01	CAP,CER. 0.047uF/25V
C1506	08E37267S01	CAP,CER. 0.047uF/25V
C1507	08E37267S01	CAP,CER. 0.047uF/25V
C1508	08E37267S01	CAP,CER. 0.047uF/25V
C1509	08E39649S01	CAP,CER. 47pF/50V
C1510	08E39649S01	CAP,CER. 47pF/50V
C1511	08E39649S01	CAP,CER. 47pF/50V
C1512	08E39649S01	CAP,CER. 47pF/50V
C1513	08E36114S01	CAP,CER. 0.22uF/16V
C1514	08E36114S01	CAP,CER. 0.22uF/16V
C1515	08E36114S01	CAP,CER. 0.22uF/16V
C1516	08E36114S01	CAP,CER. 0.22uF/16V
C1517	08E37267S01	CAP,CER. 0.047uF/25V
C1518	08E37267S01	CAP,CER. 0.047uF/25V
C1519	08E37267S01	CAP,CER. 0.047uF/25V
C1520	08E37267S01	CAP,CER. 0.047uF/25V
C1521	08E36114S01	CAP,CER. 0.22uF/16V
C1522	08E36114S01	CAP,CER. 0.22uF/16V
C1523	08E36114S01	CAP,CER. 0.22uF/16V
C1524	08E36114S01	CAP,CER. 0.22uF/16V
C1551	08E38540S01	CAP,CER. 0.15uF/16V
C1552	08E40755S01	CAP,CER. 0.18uF/25V
C1553	08E39649S01	CAP,CER. 47pF/50V
C1554	08E39649S01	CAP,CER. 47pF/50V
C1555	08E40527S01	CAP,CER. 0.068uF/50V
C1556	08E37267S01	CAP,CER. 0.047uF/25V
C1557	08E37122S01	CAP,CER. 0.1uF/25V
C1558	08E37122S01	CAP,CER. 0.1uF/25V
C1601	08E40756S01	CAP,CER. 0.56uF/16V
C1602	08E40756S01	CAP,CER. 0.56uF/16V
C1603	08E40756S01	CAP,CER. 0.56uF/16V

C1604	08E40756S01	CAP,CER. 0.56uF/16V
C1605	08E37117S01	CAP,CER. 100pF/50V
C1606	08E37117S01	CAP,CER. 100pF/50V
C1607	08E37122S01	CAP,CER. 0.1uF/25V
C1608	08E37122S01	CAP,CER. 0.1uF/25V
C1901	08E38540S01	CAP,CER. 0.15uF/16V
C1902	08E40527S01	CAP,CER. 0.068uF/50V
C1903	08E39649S01	CAP,CER. 47pF/50V
C1904	08E37267S01	CAP,CER. 0.047uF/25V
C1905	08E37267S01	CAP,CER. 0.047uF/25V
C3601	08E37122S01	CAP,CER. 0.1uF/25V
C3602	08E37122S01	CAP,CER. 0.1uF/25V
C3603	08E37122S01	CAP,CER. 0.1uF/25V
C3604	08E37122S01	CAP,CER. 0.1uF/25V
C3605	08E37122S01	CAP,CER. 0.1uF/25V
C3606	08E38713S01	CAP,CER. 150pF/50V
C3607	08E38713S01	CAP,CER. 150pF/50V
C3608	08E38713S01	CAP,CER. 150pF/50V
C3609	08E38713S01	CAP,CER. 150pF/50V
C3610	08E37119S01	CAP,CER. 680pF/50V
C3611	08E37119S01	CAP,CER. 680pF/50V
C3612	08E37119S01	CAP,CER. 680pF/50V
C3613	08E37119S01	CAP,CER. 680pF/50V
C3614	08E37153S01	CAP,CER. 1000pF/50V
C3615	08E37153S01	CAP,CER. 1000pF/50V
C3616	08E37153S01	CAP,CER. 1000pF/50V
C3617	08E37153S01	CAP,CER. 1000pF/50V
C3622	08E37122S01	CAP,CER. 0.1uF/25V
C3623	08E37122S01	CAP,CER. 0.1uF/25V
C3624	08E37122S01	CAP,CER. 0.1uF/25V
C3625	08E37122S01	CAP,CER. 0.1uF/25V
C3626	08E37153S01	CAP,CER. 1000pF/50V
C3627	08E37153S01	CAP,CER. 1000pF/50V
C3628	08E37153S01	CAP,CER. 1000pF/50V
C3629	08E37153S01	CAP,CER. 1000pF/50V
C3630	08E37123S01	CAP,CER. 0.33uF/16V
C3631	08E37123S01	CAP,CER. 0.33uF/16V
C3632	08E37123S01	CAP,CER. 0.33uF/16V
C3633	08E37123S01	CAP,CER. 0.33uF/16V
C3634	08E37123S01	CAP,CER. 0.33uF/16V
C3635	08E37123S01	CAP,CER. 0.33uF/16V
C3636	08E37123S01	CAP,CER. 0.33uF/16V
C3637	08E37123S01	CAP,CER. 0.33uF/16V
C3638	08E40363S01	CAP,CER. 2.2uF/16V
C3639	08E40363S01	CAP,CER. 2.2uF/16V
C3640	08E40363S01	CAP,CER. 2.2uF/16V
C3641	08E40363S01	CAP,CER. 2.2uF/16V
C3642	08E40363S01	CAP,CER. 2.2uF/16V
C3645	08E40363S01	CAP,CER. 2.2uF/16V
C3646	08E40363S01	CAP,CER. 2.2uF/16V
C3647	08E40363S01	CAP,CER. 2.2uF/16V
C3651	08E37122S01	CAP,CER. 0.1uF/25V
C3652	08E37122S01	CAP,CER. 0.1uF/25V
C3653	08E37122S01	CAP,CER. 0.1uF/25V
C3654	08E40754S01	CAP,CER.180pF/50V
C3655	08E40754S01	CAP,CER.180pF/50V
C3656	08E37153S01	CAP,CER. 1000pF/50V

C3657	08E37153S01	CAP,CER. 1000pF/50V
C3658	08E37153S01	CAP,CER. 1000pF/50V
C3659	08E37153S01	CAP,CER. 1000pF/50V
C3662	08E37122S01	CAP,CER. 0.1uF/25V
C3663	08E37122S01	CAP,CER. 0.1uF/25V
C3664	08E37153S01	CAP,CER. 1000pF/50V
C3665	08E37153S01	CAP,CER. 1000pF/50V
C3666	08E40363S01	CAP,CER. 2.2uF/16V
C3667	08E40363S01	CAP,CER. 2.2uF/16V
C3668	08E40363S01	CAP,CER. 2.2uF/16V
C3669	08E40363S01	CAP,CER. 2.2uF/16V
C3670	08E37123S01	CAP,CER. 0.33uF/16V
C3671	08E37123S01	CAP,CER. 0.33uF/16V
C3672	08E37123S01	CAP,CER. 0.33uF/16V
C3673	08E37123S01	CAP,CER. 0.33uF/16V
C3701	08E40759S01	CAP,CER.1000pF/100V
C3702	08E40759S01	CAP,CER.1000pF/100V
C3703	08E40759S01	CAP,CER.1000pF/100V
C3704	08E40759S01	CAP,CER.1000pF/100V
C3705	08E39651S01	CAP,CER. 0.22uF/50V
C3706	08E39651S01	CAP,CER. 0.22uF/50V
C3707	08E39651S01	CAP,CER. 0.22uF/50V
C3708	08E39651S01	CAP,CER. 0.22uF/50V
C3709	08E39651S01	CAP,CER. 0.22uF/50V
C3710	08E39651S01	CAP,CER. 0.22uF/50V
C3711	08E39651S01	CAP,CER. 0.22uF/50V
C3712	08E39651S01	CAP,CER. 0.22uF/50V
C3801	08E37122S01	CAP,CER. 0.1uF/25V
C3802	08E37122S01	CAP,CER. 0.1uF/25V
C3803	08E37122S01	CAP,CER. 0.1uF/25V
C3804	08E37122S01	CAP,CER. 0.1uF/25V
C3901	08E37266S01	CAP,CER. 0.015uF/50V
C3902	08E37266S01	CAP,CER. 0.015uF/50V
C3903	08E37266S01	CAP,CER. 0.015uF/50V
C3904	08E37266S01	CAP,CER. 0.015uF/50V
C4001	08E39106S01	CAP,CER.100pF/500V
C4002	08E39106S01	CAP,CER.100pF/500V
C4003	08E39106S01	CAP,CER.100pF/500V
C4004	08E39106S01	CAP,CER.100pF/500V
C4005	08E39106S01	CAP,CER.100pF/500V
C4006	08E39106S01	CAP,CER.100pF/500V
C4007	08E39106S01	CAP,CER.100pF/500V
C4008	08E39106S01	CAP,CER.100pF/500V
C4009	08E39115S01	CAP,METAL 1uF/100V
C4010	08E39115S01	CAP,METAL 1uF/100V
C4011	08E39115S01	CAP,METAL 1uF/100V
C4012	08E39115S01	CAP,METAL 1uF/100V
C4013	08E39657S01	CAP,CER. 0.15uF/100V
C4014	08E39657S01	CAP,CER. 0.15uF/100V
C4015	08E39657S01	CAP,CER. 0.15uF/100V
C4016	08E39657S01	CAP,CER. 0.15uF/100V
C4021	08E39106S01	CAP,CER.100pF/500V
C4022	08E39106S01	CAP,CER.100pF/500V
C4023	08E39106S01	CAP,CER.100pF/500V
C4024	08E39106S01	CAP,CER.100pF/500V
C4025	08E39115S01	CAP,METAL 1uF/100V
C4026	08E39115S01	CAP,METAL 1uF/100V

C4027	08E39657S01	CAP,CER. 0.15uF/100V
C4028	08E39657S01	CAP,CER. 0.15uF/100V
C4029	08E40768S01	CAP,MYL.2.2uF/100V
C4105	08E37267S01	CAP,CER. 0.047uF/25V
C4106	08E37267S01	CAP,CER. 0.047uF/25V
C4107	08E37122S01	CAP,CER. 0.1uF/25V
C4108	08E37122S01	CAP,CER. 0.1uF/25V
C4109	08E37122S01	CAP,CER. 0.1uF/25V
C4110	08E37271S01	CAP,CER. 22pF/50V
C4111	08E37122S01	CAP,CER. 0.1uF/25V
C4201	08E39662S01	CAP,CER. 0.01uF/100V
C4202	08E39662S01	CAP,CER. 0.01uF/100V
C4203	08E39662S01	CAP,CER. 0.01uF/100V
C4204	08E39662S01	CAP,CER. 0.01uF/100V
C4205	08E39662S01	CAP,CER. 0.01uF/100V
C4206	08E39662S01	CAP,CER. 0.01uF/100V
C4207	08E39662S01	CAP,CER. 0.01uF/100V
C4208	08E39662S01	CAP,CER. 0.01uF/100V
C4209	08E39662S01	CAP,CER. 0.01uF/100V
C4210	08E39103S01	CAP,CER.1000pF/500V
C4211	08E39188S01	CAP,CER.2200pF/500V
C4212	08E39662S01	CAP,CER. 0.01uF/100V
C4213	08E39103S01	CAP,CER.1000pF/500V
C4214	08E39188S01	CAP,CER.2200pF/500V
C4215	08E37151S01	CAP,CER. 470pF/50V
C4216	08E37151S01	CAP,CER. 470pF/50V
C4217	08E37151S01	CAP,CER. 470pF/50V
C4218	08E37151S01	CAP,CER. 470pF/50V
C4701	08E35412S01	CAP,CER. 1500pF/50V
C4702	08E35412S01	CAP,CER. 1500pF/50V
C4703	08E37122S01	CAP,CER. 0.1uF/25V
C4901	08E37122S01	CAP,CER. 0.1uF/25V
C4902	08E37153S01	CAP,CER. 1000pF/50V
C4903	08E37120S01	CAP,CER. 0.01uF/50V
C5001	08E37122S01	CAP,CER. 0.1uF/25V
C5002	08E37122S01	CAP,CER. 0.1uF/25V
C5003	08E37121S01	CAP,CER. 0.022uF/50V
C5004	08E37122S01	CAP,CER. 0.1uF/25V
C5005	08E40362S01	CAP,CER. 6800pF/50V
C5006	08E37120S01	CAP,CER. 0.01uF/50V
C5007	08E37122S01	CAP,CER. 0.1uF/25V
C5008	08E37122S01	CAP,CER. 0.1uF/25V
C5009	08E37122S01	CAP,CER. 0.1uF/25V
C5010	08E37122S01	CAP,CER. 0.1uF/25V
C5011	08E37122S01	CAP,CER. 0.1uF/25V
C5012	08E37122S01	CAP,CER. 0.1uF/25V
C5013	08E37122S01	CAP,CER. 0.1uF/25V
C5014	08E37122S01	CAP,CER. 0.1uF/25V
C5015	08E37122S01	CAP,CER. 0.1uF/25V
C5016	08E37122S01	CAP,CER. 0.1uF/25V
C5017	08E37122S01	CAP,CER. 0.1uF/25V
C5018	08E37122S01	CAP,CER. 0.1uF/25V
C5019	08E37122S01	CAP,CER. 0.1uF/25V
C5020	08E37122S01	CAP,CER. 0.1uF/25V
C5021	08E37122S01	CAP,CER. 0.1uF/25V
C5022	08E37122S01	CAP,CER. 0.1uF/25V
C5023	08E37122S01	CAP,CER. 0.1uF/25V

C5024	08E37122S01	CAP,CER. 0.1uF/25V
C5025	08E37122S01	CAP,CER. 0.1uF/25V
C5026	08E37271S01	CAP,CER. 22pF/50V
C8001	08E37122S01	CAP,CER. 0.1uF/25V
C8002	08E37122S01	CAP,CER. 0.1uF/25V
C8003	08E37122S01	CAP,CER. 0.1uF/25V
C8901	08E37122S01	CAP,CER. 0.1uF/25V
C8902	08E37122S01	CAP,CER. 0.1uF/25V
C9001	08E39106S01	CAP,CER.100pF/500V
C9002	08E39104S01	CAP,CER.0.01uF/500V
C9003	08E39106S01	CAP,CER.100pF/500V
C9101	08E37120S01	CAP,CER. 0.01uF/50V
C9301	08E37266S01	CAP,CER. 0.015uF/50V
C9302	08E37266S01	CAP,CER. 0.015uF/50V
C9303	08E37266S01	CAP,CER. 0.015uF/50V
C9304	08E37266S01	CAP,CER. 0.015uF/50V
C9601	08E37122S01	CAP,CER. 0.1uF/25V
C9701	08E37120S01	CAP,CER. 0.01uF/50V
C9702	08E37122S01	CAP,CER. 0.1uF/25V
C9703	08E40362S01	CAP,CER. 6800pF/50V
C9704	08E37122S01	CAP,CER. 0.1uF/25V
C9801	08E37267S01	CAP,CER. 0.047uF/25V
C9901	08E37122S01	CAP,CER. 0.1uF/25V
C9902	08E39188S01	CAP,CER.2200pF/500V
C9903	08E39188S01	CAP,CER.2200pF/500V
C9907	08E40753S01	CAP,CER.390pF/50V
C9908	08E40753S01	CAP,CER.390pF/50V
C9909	08E37153S01	CAP,CER. 1000pF/50V
C9910	08E37153S01	CAP,CER. 1000pF/50V
C9911	08E40757S01	CAP,CER.150pF/100V
C9912	08E40757S01	CAP,CER.150pF/100V
C9913	08E40758S01	CAP,CER.330pF/100V
C9914	08E40758S01	CAP,CER.330pF/100V
C9915	08E37120S01	CAP,CER. 0.01uF/50V
CB8001	09E27780S01	CONN,WTB 02P
CL5001	91E40781S01	RESONATOR,7.7MHz
D1101	48E38037S01	DIODE,1PS226
D1102	48E38037S01	DIODE,1PS226
D1103	48E38037S01	DIODE,1PS226
D1104	48E38037S01	DIODE,1PS226
D1105	48E38037S01	DIODE,1PS226
D1106	48E38037S01	DIODE,1PS226
D1107	48E38037S01	DIODE,1PS226
D1108	48E38037S01	DIODE,1PS226
D1109	48E38037S01	DIODE,1PS226
D1110	48E38037S01	DIODE,1PS226
D1111	48E38037S01	DIODE,1PS226
D1112	48E38037S01	DIODE,1PS226
D1701	48E36633S01	DIODE,DAP202K
D1702	48E36633S01	DIODE,DAP202K
D3601	48E40338S01	DIODE,KDR720E
D3602	48E40338S01	DIODE,KDR720E
D3603	48E40338S01	DIODE,KDR720E
D3604	48E40338S01	DIODE,KDR720E
D3609	48E37927S01	DIODE,1SS355
D3610	48E37927S01	DIODE,1SS355
D3611	48E37927S01	DIODE,1SS355

D3612	48E37927S01	DIODE,1SS355
D3613	48E37927S01	DIODE,1SS355
D3614	48E37927S01	DIODE,1SS355
D3615	48E37927S01	DIODE,1SS355
D3616	48E37927S01	DIODE,1SS355
D3621	48E40338S01	DIODE,KDR720E
D3622	48E40338S01	DIODE,KDR720E
D3623	48E37927S01	DIODE,1SS355
D3624	48E37927S01	DIODE,1SS355
D3625	48E37927S01	DIODE,1SS355
D3626	48E37927S01	DIODE,1SS355
D4105	48E38037S01	DIODE,1PS226
D4401	48E36633S01	DIODE,DAP202K
D4402	48E36633S01	DIODE,DAP202K
D4403	48E37927S01	DIODE,1SS355
D4451	48E36633S01	DIODE,DAP202K
D5001	48E40338S01	DIODE,KDR720E
D5002	48E39121S01	DIODE,GN1D
D5003	48E36568S01	DIODE,DAN202K
D9101	48E39121S01	DIODE,GN1D
D9301	48E39388S01	DIODE,MURA110
D9302	48E39388S01	DIODE,MURA110
D9303	48E39388S01	DIODE,MURA110
D9304	48E39388S01	DIODE,MURA110
D9501	48E36568S01	DIODE,DAN202K
D9502	48E37927S01	DIODE,1SS355
D9901	48E40373S01	DIODE,FCH20A10
D9902	48E40372S01	DIODE,FRH20A10
E1101	23E39769S01	CAP,ELY. 10uF/16V
E1102	23E39769S01	CAP,ELY. 10uF/16V
E1103	23E39769S01	CAP,ELY. 10uF/16V
E1104	23E39769S01	CAP,ELY. 10uF/16V
E1105	23E39769S01	CAP,ELY. 10uF/16V
E1106	23E39769S01	CAP,ELY. 10uF/16V
E1107	23E39769S01	CAP,ELY. 10uF/16V
E1108	23E39769S01	CAP,ELY. 10uF/16V
E1109	23E39769S01	CAP,ELY. 10uF/16V
E1110	23E39769S01	CAP,ELY. 10uF/16V
E1111	23E39769S01	CAP,ELY. 10uF/16V
E1112	23E39769S01	CAP,ELY. 10uF/16V
E1701	23E40761S01	CAP,ELY.33uF/16V
E1702	23E40761S01	CAP,ELY.33uF/16V
E1703	23E40761S01	CAP,ELY.33uF/16V
E1704	23E40761S01	CAP,ELY.33uF/16V
E1705	23E40761S01	CAP,ELY.33uF/16V
E3601	23E38002S01	CAP,ELY. 4.7uF/50V
E3602	23E38002S01	CAP,ELY. 4.7uF/50V
E3603	23E38002S01	CAP,ELY. 4.7uF/50V
E3604	23E38002S01	CAP,ELY. 4.7uF/50V
E3605	23E40766S01	CAP,ELY.10uF/16V
E3606	23E40766S01	CAP,ELY.10uF/16V
E3607	23E40766S01	CAP,ELY.10uF/16V
E3608	23E40766S01	CAP,ELY.10uF/16V
E3609	23E40766S01	CAP,ELY.10uF/16V
E3610	23E40766S01	CAP,ELY.10uF/16V
E3611	23E40766S01	CAP,ELY.10uF/16V
E3612	23E40766S01	CAP,ELY.10uF/16V

E3613	23E40767S01	CAP,ELY.2.2uF/50V
E3614	23E40767S01	CAP,ELY.2.2uF/50V
E3615	23E40767S01	CAP,ELY.2.2uF/50V
E3616	23E40767S01	CAP,ELY.2.2uF/50V
E3621	23E40761S01	CAP,ELY.33uF/16V
E3622	23E40761S01	CAP,ELY.33uF/16V
E3623	23E40766S01	CAP,ELY.10uF/16V
E3624	23E40766S01	CAP,ELY.10uF/16V
E3625	23E40766S01	CAP,ELY.10uF/16V
E3626	23E40766S01	CAP,ELY.10uF/16V
E3627	23E40767S01	CAP,ELY.2.2uF/50V
E3628	23E40767S01	CAP,ELY.2.2uF/50V
E3701	23E40367S01	CAP,ELY.100uF/50V
E3702	23E40367S01	CAP,ELY.100uF/50V
E3703	23E40367S01	CAP,ELY.100uF/50V
E3704	23E40367S01	CAP,ELY.100uF/50V
E3705	23E40367S01	CAP,ELY.100uF/50V
E3706	23E40367S01	CAP,ELY.100uF/50V
E3707	23E40367S01	CAP,ELY.100uF/50V
E3708	23E40367S01	CAP,ELY.100uF/50V
E3711	23E40367S01	CAP,ELY.100uF/50V
E3712	23E40367S01	CAP,ELY.100uF/50V
E3713	23E40367S01	CAP,ELY.100uF/50V
E3714	23E40367S01	CAP,ELY.100uF/50V
E3901	23E40763S01	CAP,ELY.220uF/6.3V
E3902	23E40763S01	CAP,ELY.220uF/6.3V
E4901	23E40367S01	CAP,ELY.100uF/50V
E4902	23E38001S01	CAP,ELY. 2.2uF/50V
E4903	23E40764S01	CAP,ELY.220uF/16V
E5001	23E40237S01	CAP,ELY. 33uF/16V
E5002	23E40237S01	CAP,ELY. 33uF/16V
E8901	23E40760S01	CAP,ELY.10uF/16V
E8902	23E40368S01	CAP,ELY.10uF/25V
E9101	23E38013S01	CAP,ELY. 470uF/25V
E9301	23E40366S01	CAP,ELY.100uF/35V
E9302	23E40366S01	CAP,ELY.100uF/35V
E9303	23E40764S01	CAP,ELY.220uF/16V
E9304	23E40764S01	CAP,ELY.220uF/16V
E9701	23E40765S01	CAP,ELY.330uF/10V
E9702	23E40365S01	CAP,ELY.22uF/16V
E9703	23E40365S01	CAP,ELY.22uF/16V
E9704	23E40762S01	CAP,ELY.100uF/16V
E9901	23E39863S01	CAP,ELY. 2200uF/25V
E9902	23E39863S01	CAP,ELY. 2200uF/25V
E9903	23E40371S01	CAP,ELY.8200uF/50V
E9904	23E40371S01	CAP,ELY.8200uF/50V
IC1101	51E40776S01	IC,BA4580RFVM
IC1102	51E40776S01	IC,BA4580RFVM
IC1103	51E40776S01	IC,BA4580RFVM
IC1104	51E40776S01	IC,BA4580RFVM
IC1105	51E39598S01	IC,BA4560RFVM
IC1106	51E39598S01	IC,BA4560RFVM
IC1201	51E40776S01	IC,BA4580RFVM
IC1202	51E40776S01	IC,BA4580RFVM
IC1203	51E40776S01	IC,BA4580RFVM
IC1401	51E40776S01	IC,BA4580RFVM
IC1402	51E40776S01	IC,BA4580RFVM

IC1403	51E39598S01	IC,BA4560RFVM
IC1501	51E40776S01	IC,BA4580RFVM
IC1502	51E40776S01	IC,BA4580RFVM
IC1503	51E40776S01	IC,BA4580RFVM
IC1504	51E40776S01	IC,BA4580RFVM
IC1505	51E40776S01	IC,BA4580RFVM
IC1506	51E40776S01	IC,BA4580RFVM
IC1507	51E40776S01	IC,BA4580RFVM
IC1508	51E40776S01	IC,BA4580RFVM
IC1551	51E39598S01	IC,BA4560RFVM
IC1601	51E39598S01	IC,BA4560RFVM
IC1901	51E39598S01	IC,BA4560RFVM
IC3601	51E40342S01	IC,74VHC00MTCX
IC3602	51E40774S01	IC,IRS2092SPbF
IC3603	51E40774S01	IC,IRS2092SPbF
IC3604	51E40774S01	IC,IRS2092SPbF
IC3605	51E40774S01	IC,IRS2092SPbF
IC3621	51E40342S01	IC,74VHC00MTCX
IC3622	51E40774S01	IC,IRS2092SPbF
IC3623	51E40774S01	IC,IRS2092SPbF
IC3901	51E39601S01	IC,NJM78M05DL1A
IC3902	51E39603S01	IC,NJM79M05DL1A
IC4103	51E39598S01	IC,BA4560RFVM
IC4104	51E40343S01	IC,74VHC74MTCX
IC4105	51E40775S01	IC,BD5228G
IC4701	51E39597S01	IC,BA2903FVM
IC5001	51E36635S01	IC,NJU7222U50
IC5002	51E39139S01	IC,BD5243G
IC5003	51E40344S01	IC,BD5240G
IC5004	51E40773S01	IC,KIC7SH04FU
IC5005	51-04615Z01	IC,TMP87C847UG -QT
IC5006	51E40773S01	IC,KIC7SH04FU
IC5007	51E39456S01	IC,KIC7SZ32FU
IC5008	51E39131S01	IC,KIC7SH08FU
IC8901	51E38634S01	IC,NJM7809FA
IC9301	51E35123S01	IC,NJM7815FA
IC9302	51E35124S01	IC,NJM7915FA
IC9701	51E39140S01	IC,uPC494GS-E1-A
IC9801	51E34504S01	IC,MC33152D
L4001	24E40777S01	COIL,CHOKE 15uH
L4002	24E40777S01	COIL,CHOKE 15uH
L4003	24E40777S01	COIL,CHOKE 15uH
L4004	24E40777S01	COIL,CHOKE 15uH
L4011	24E40778S01	COIL,CHOKE 15uH
L4012	24E40778S01	COIL,CHOKE 15uH
L9001	24E39739S01	COIL,IND. 10uH
L9901	24E39742S01	COIL,AIR 0.6uH
L9902	24E39742S01	COIL,AIR 0.6uH
LD8001	48E39873S01	LED,BLU UB1106WABC
LD8002	48E39873S01	LED,BLU UB1106WABC
LD8003	48E39345S01	LED,RED FR1106W
Q1701	48E39389S01	TR,KTC2875
Q1702	48E39389S01	TR,KTC2875
Q1703	48E39389S01	TR,KTC2875
Q1704	48E39389S01	TR,KTC2875
Q1705	48E39389S01	TR,KTC2875
Q1706	48E40770S01	TR,DTA144EE

Q1708	48E40770S01	TR,DTA144EE
Q1709	48E37097S01	TR,DTC114EE
Q1711	48E37097S01	TR,DTC114EE
Q3601	48E40770S01	TR,DTA144EE
Q3602	48E40770S01	TR,DTA144EE
Q3603	48E40770S01	TR,DTA144EE
Q3604	48E40770S01	TR,DTA144EE
Q3605	48E40770S01	TR,DTA144EE
Q3606	48E40770S01	TR,DTA144EE
Q3607	48E40770S01	TR,DTA144EE
Q3608	48E40770S01	TR,DTA144EE
Q3609	48E37097S01	TR,DTC114EE
Q3610	48E37097S01	TR,DTC114EE
Q3611	48E37097S01	TR,DTC114EE
Q3612	48E37097S01	TR,DTC114EE
Q3621	48E40770S01	TR,DTA144EE
Q3622	48E40770S01	TR,DTA144EE
Q3623	48E40770S01	TR,DTA144EE
Q3624	48E37097S01	TR,DTC114EE
Q3625	48E37097S01	TR,DTC114EE
Q3701	48E39455S01	FET,IRF6665
Q3702	48E39455S01	FET,IRF6665
Q3703	48E39455S01	FET,IRF6665
Q3704	48E39455S01	FET,IRF6665
Q3705	48E39455S01	FET,IRF6665
Q3706	48E39455S01	FET,IRF6665
Q3707	48E39455S01	FET,IRF6665
Q3708	48E39455S01	FET,IRF6665
Q3711	48E40771S01	FET,IRF6662Pb
Q3712	48E40771S01	FET,IRF6662Pb
Q3713	48E40771S01	FET,IRF6662Pb
Q3714	48E40771S01	FET,IRF6662Pb
Q4101	48E37097S01	TR,DTC114EE
Q4103	48E37893S01	TR,DTA114EE
Q4108	48E37097S01	TR,DTC114EE
Q4109	48E40770S01	TR,DTA144EE
Q4110	48E37893S01	TR,DTA114EE
Q4111	48E40772S01	FET,2SK208
Q4112	48E37097S01	TR,DTC114EE
Q4401	48E39389S01	TR,KTC2875
Q4402	48E39389S01	TR,KTC2875
Q4403	48E39389S01	TR,KTC2875
Q4404	48E39389S01	TR,KTC2875
Q4405	48E40770S01	TR,DTA144EE
Q4406	48E39389S01	TR,KTC2875
Q4407	48E37097S01	TR,DTC114EE
Q4409	48E37097S01	TR,DTC114EE
Q4451	48E39389S01	TR,KTC2875
Q4452	48E39389S01	TR,KTC2875
Q4701	48E40770S01	TR,DTA144EE
Q4702	48E40770S01	TR,DTA144EE
Q4901	48E27748S01	TR,KTD718-O-U
Q5001	48E37097S01	TR,DTC114EE
Q5002	48E37097S01	TR,DTC114EE
Q5003	48E37097S01	TR,DTC114EE
Q5004	48E40770S01	TR,DTA144EE
Q8001	48E39365S01	TR,DTD113EKA

Q8002	48E38485S01	TR,DTC123JK
Q8003	48E38485S01	TR,DTC123JK
Q9101	48E36571S01	TR,2SC2412K
Q9102	48E36576S01	TR,2SB1243Q
Q9501	48E37188S01	TR,DTC144EE
Q9502	48E36571S01	TR,2SC2412K
Q9503	48E36571S01	TR,2SC2412K
Q9701	48E40769S01	TR,DTA124EE
Q9901	48E40341S01	FET,IRF6648
Q9902	48E40341S01	FET,IRF6648
Q9903	48E40341S01	FET,IRF6648
Q9904	48E40341S01	FET,IRF6648
Q9905	48E40341S01	FET,IRF6648
Q9906	48E40341S01	FET,IRF6648
Q9907	48E40341S01	FET,IRF6648
Q9908	48E40341S01	FET,IRF6648
R1001	06E38409S01	RES,CF. 10-1/16W
R1101	06E40187S01	RES,CF. 1K-1/16
R1102	06E40315S01	RES,CF. 1.2K-1/16W
R1103	06E40315S01	RES,CF. 1.2K-1/16W
R1104	06E40187S01	RES,CF. 1K-1/16
R1105	06E40187S01	RES,CF. 1K-1/16
R1106	06E40315S01	RES,CF. 1.2K-1/16W
R1107	06E40315S01	RES,CF. 1.2K-1/16W
R1108	06E40187S01	RES,CF. 1K-1/16
R1109	06E40187S01	RES,CF. 1K-1/16
R1110	06E40315S01	RES,CF. 1.2K-1/16W
R1111	06E40315S01	RES,CF. 1.2K-1/16W
R1112	06E40187S01	RES,CF. 1K-1/16
R1113	06E40311S01	RES,CF. 120-1/16W
R1114	06E40311S01	RES,CF. 120-1/16W
R1115	06E40311S01	RES,CF. 120-1/16W
R1116	06E40311S01	RES,CF. 120-1/16W
R1117	06E40311S01	RES,CF. 120-1/16W
R1118	06E40311S01	RES,CF. 120-1/16W
R1119	06E36586S01	RES,CF. 22K-1/16W
R1120	06E36586S01	RES,CF. 22K-1/16W
R1121	06E36586S01	RES,CF. 22K-1/16W
R1122	06E36586S01	RES,CF. 22K-1/16W
R1123	06E36586S01	RES,CF. 22K-1/16W
R1124	06E36586S01	RES,CF. 22K-1/16W
R1125	06E31163S01	RES,CF. 220K-1/16W
R1126	06E31163S01	RES,CF. 220K-1/16W
R1127	06E31163S01	RES,CF. 220K-1/16W
R1128	06E31163S01	RES,CF. 220K-1/16W
R1129	06E31163S01	RES,CF. 220K-1/16W
R1130	06E31163S01	RES,CF. 220K-1/16W
R1131	06E31163S01	RES,CF. 220K-1/16W
R1132	06E31163S01	RES,CF. 220K-1/16W
R1133	06E36662S01	RES,CF. 39K-1/16W
R1134	06E36662S01	RES,CF. 39K-1/16W
R1135	06E36662S01	RES,CF. 39K-1/16W
R1136	06E36662S01	RES,CF. 39K-1/16W
R1137	06E36618S01	RES,CF. 1K-1/16W
R1138	06E36618S01	RES,CF. 1K-1/16W
R1139	06E36618S01	RES,CF. 1K-1/16W
R1140	06E36618S01	RES,CF. 1K-1/16W

R1141	06E36618S01	RES,CF. 1K-1/16W
R1142	06E36618S01	RES,CF. 1K-1/16W
R1143	06E36618S01	RES,CF. 1K-1/16W
R1144	06E36618S01	RES,CF. 1K-1/16W
R1145	06E36618S01	RES,CF. 1K-1/16W
R1146	06E36618S01	RES,CF. 1K-1/16W
R1147	06E36618S01	RES,CF. 1K-1/16W
R1148	06E36618S01	RES,CF. 1K-1/16W
R1201	06E40322S01	RES,CF. 18K-1/16W
R1202	06E40322S01	RES,CF. 18K-1/16W
R1203	06E40322S01	RES,CF. 18K-1/16W
R1204	06E40322S01	RES,CF. 18K-1/16W
R1205	06E40322S01	RES,CF. 18K-1/16W
R1206	06E40322S01	RES,CF. 18K-1/16W
R1207	06E40322S01	RES,CF. 18K-1/16W
R1208	06E40322S01	RES,CF. 18K-1/16W
R1209	06E40322S01	RES,CF. 18K-1/16W
R1210	06E40322S01	RES,CF. 18K-1/16W
R1211	06E40322S01	RES,CF. 18K-1/16W
R1212	06E40322S01	RES,CF. 18K-1/16W
R1213	06E40322S01	RES,CF. 18K-1/16W
R1214	06E40322S01	RES,CF. 18K-1/16W
R1215	06E40322S01	RES,CF. 18K-1/16W
R1216	06E40322S01	RES,CF. 18K-1/16W
R1217	06E40322S01	RES,CF. 18K-1/16W
R1218	06E40322S01	RES,CF. 18K-1/16W
R1219	06E40322S01	RES,CF. 18K-1/16W
R1220	06E40322S01	RES,CF. 18K-1/16W
R1221	06E40322S01	RES,CF. 18K-1/16W
R1222	06E40322S01	RES,CF. 18K-1/16W
R1223	06E40322S01	RES,CF. 18K-1/16W
R1224	06E40322S01	RES,CF. 18K-1/16W
R1401	06E40740S01	RES,CF. 5.1K-1/16W
R1402	06E40740S01	RES,CF. 5.1K-1/16W
R1403	06E40740S01	RES,CF. 5.1K-1/16W
R1404	06E40740S01	RES,CF. 5.1K-1/16W
R1405	06E40192S01	RES,CF. 22K-1/16
R1406	06E40192S01	RES,CF. 22K-1/16
R1407	06E40187S01	RES,CF. 1K-1/16
R1408	06E40187S01	RES,CF. 1K-1/16
R1409	06E40187S01	RES,CF. 1K-1/16
R1410	06E40187S01	RES,CF. 1K-1/16
R1411	06E40319S01	RES,CF. 6.2K-1/16W
R1412	06E40319S01	RES,CF. 6.2K-1/16W
R1413	06E40733S01	RES,CF. 200-1/16W
R1414	06E36663S01	RES,CF. 56K-1/16W
R1415	06E40745S01	RES,CF. 47K-1/16W
R1416	06E36623S01	RES,CF. 1M-1/16W
R1417	06E40553S01	RES,CF. 2.4K-1/16
R1418	06E40553S01	RES,CF. 2.4K-1/16
R1419	06E40553S01	RES,CF. 2.4K-1/16
R1420	06E40553S01	RES,CF. 2.4K-1/16
R1421	06E40229S01	RES,CF. 1.5K-1/16W
R1422	06E40737S01	RES,CF. 820-1/16W
R1423	06E40740S01	RES,CF. 5.1K-1/16W
R1424	06E36623S01	RES,CF. 1M-1/16W
R1425	06E36623S01	RES,CF. 1M-1/16W

R1426	06E36623S01	RES,CF. 1M-1/16W
R1427	06E36623S01	RES,CF. 1M-1/16W
R1501	06E40192S01	RES,CF. 22K-1/16
R1502	06E40192S01	RES,CF. 22K-1/16
R1503	06E40192S01	RES,CF. 22K-1/16
R1504	06E40192S01	RES,CF. 22K-1/16
R1505	06E40192S01	RES,CF. 22K-1/16
R1506	06E40192S01	RES,CF. 22K-1/16
R1507	06E40192S01	RES,CF. 22K-1/16
R1508	06E40192S01	RES,CF. 22K-1/16
R1509	06E40192S01	RES,CF. 22K-1/16
R1510	06E40192S01	RES,CF. 22K-1/16
R1511	06E40192S01	RES,CF. 22K-1/16
R1512	06E40192S01	RES,CF. 22K-1/16
R1513	06E40192S01	RES,CF. 22K-1/16
R1514	06E40192S01	RES,CF. 22K-1/16
R1515	06E40192S01	RES,CF. 22K-1/16
R1516	06E40192S01	RES,CF. 22K-1/16
R1517	06E36464S01	RES,CF. 0-1/16W
R1518	06E36464S01	RES,CF. 0-1/16W
R1519	06E36464S01	RES,CF. 0-1/16W
R1520	06E36464S01	RES,CF. 0-1/16W
R1521	06E40189S01	RES,CF. 15K-1/16
R1522	06E40189S01	RES,CF. 15K-1/16
R1523	06E40189S01	RES,CF. 15K-1/16
R1524	06E40189S01	RES,CF. 15K-1/16
R1525	06E40230S01	RES,CF. 1.8K-1/16W
R1526	06E40230S01	RES,CF. 1.8K-1/16W
R1527	06E40230S01	RES,CF. 1.8K-1/16W
R1528	06E40230S01	RES,CF. 1.8K-1/16W
R1529	06E40192S01	RES,CF. 22K-1/16
R1530	06E40192S01	RES,CF. 22K-1/16
R1531	06E40192S01	RES,CF. 22K-1/16
R1532	06E40192S01	RES,CF. 22K-1/16
R1533	06E40230S01	RES,CF. 1.8K-1/16W
R1534	06E40230S01	RES,CF. 1.8K-1/16W
R1535	06E40230S01	RES,CF. 1.8K-1/16W
R1536	06E40230S01	RES,CF. 1.8K-1/16W
R1537	06E36464S01	RES,CF. 0-1/16W
R1538	06E36464S01	RES,CF. 0-1/16W
R1539	06E36464S01	RES,CF. 0-1/16W
R1540	06E36464S01	RES,CF. 0-1/16W
R1551	06E40320S01	RES,CF. 8.2K-1/16W
R1552	06E40320S01	RES,CF. 8.2K-1/16W
R1553	06E40320S01	RES,CF. 8.2K-1/16W
R1554	06E40320S01	RES,CF. 8.2K-1/16W
R1555	06E40187S01	RES,CF. 1K-1/16
R1601	06E40189S01	RES,CF. 15K-1/16
R1602	06E40743S01	RES,CF. 9.1K-1/16W
R1603	06E40744S01	RES,CF. 36K-1/16W
R1604	06E40324S01	RES,CF. 27K-1/16W
R1701	06E36559S01	RES,CF. 47K-1/16W
R1702	06E36559S01	RES,CF. 47K-1/16W
R1703	06E36559S01	RES,CF. 47K-1/16W
R1704	06E36559S01	RES,CF. 47K-1/16W
R1705	06E36559S01	RES,CF. 47K-1/16W
R1706	06E31680S01	RES,CF. 680-1/16W

R1707	06E31680S01	RES,CF. 680-1/16W
R1708	06E31680S01	RES,CF. 680-1/16W
R1709	06E31680S01	RES,CF. 680-1/16W
R1710	06E31680S01	RES,CF. 680-1/16W
R1711	06E31680S01	RES,CF. 680-1/16W
R1712	06E31680S01	RES,CF. 680-1/16W
R1713	06E31680S01	RES,CF. 680-1/16W
R1714	06E31680S01	RES,CF. 680-1/16W
R1715	06E31680S01	RES,CF. 680-1/16W
R1716	06E36615S01	RES,CF. 5.6K-1/4W
R1717	06E36615S01	RES,CF. 5.6K-1/4W
R1718	06E36615S01	RES,CF. 5.6K-1/4W
R1719	06E36615S01	RES,CF. 5.6K-1/4W
R1720	06E36615S01	RES,CF. 5.6K-1/4W
R1721	06E36586S01	RES,CF. 22K-1/16W
R1901	06E40187S01	RES,CF. 1K-1/16
R1902	06E40738S01	RES,CF. 3.3K-1/16W
R1903	06E40324S01	RES,CF. 27K-1/16W
R1904	06E40738S01	RES,CF. 3.3K-1/16W
R1905	06E40324S01	RES,CF. 27K-1/16W
R1906	06E40324S01	RES,CF. 27K-1/16W
R1907	06E40734S01	RES,CF. 560-1/16W
R3001	06E40736S01	RES,CF. 680-1/10W
R3002	06E40736S01	RES,CF. 680-1/10W
R3005	06E36616S01	RES,CF. 100-1/16W
R3006	06E36616S01	RES,CF. 100-1/16W
R3007	06E36464S01	RES,CF. 0-1/16W
R3008	06E40321S01	RES,CF. 10K-1/16W
R3009	06E40321S01	RES,CF. 10K-1/16W
R3010	06E36464S01	RES,CF. 0-1/16W
R3011	06E40738S01	RES,CF. 3.3K-1/16W
R3012	06E40320S01	RES,CF. 8.2K-1/16W
R3013	06E40320S01	RES,CF. 8.2K-1/16W
R3014	06E40738S01	RES,CF. 3.3K-1/16W
R3015	06E36674S01	RES,CF. 100K-1/16W
R3016	06E40321S01	RES,CF. 10K-1/16W
R3017	06E40321S01	RES,CF. 10K-1/16W
R3018	06E40321S01	RES,CF. 10K-1/16W
R3019	06E40318S01	RES,CF. 5.6K-1/16W
R3020	06E40318S01	RES,CF. 5.6K-1/16W
R3021	06E40321S01	RES,CF. 10K-1/16W
R3022	06E36674S01	RES,CF. 100K-1/16W
R3605	06E36463S01	RES,CF. 10K-1/16W
R3606	06E36463S01	RES,CF. 10K-1/16W
R3607	06E36463S01	RES,CF. 10K-1/16W
R3608	06E36463S01	RES,CF. 10K-1/16W
R3609	06E31680S01	RES,CF. 680-1/16W
R3610	06E31680S01	RES,CF. 680-1/16W
R3611	06E31680S01	RES,CF. 680-1/16W
R3612	06E31680S01	RES,CF. 680-1/16W
R3613	06E40738S01	RES,CF. 3.3K-1/16W
R3614	06E40738S01	RES,CF. 3.3K-1/16W
R3615	06E40738S01	RES,CF. 3.3K-1/16W
R3616	06E40738S01	RES,CF. 3.3K-1/16W
R3617	06E36655S01	RES,CF. 47K-1/4W
R3618	06E35237S01	RES,CF. 1K-1/4W
R3619	06E35237S01	RES,CF. 1K-1/4W

R3620	06E36655S01	RES,CF. 47K-1/4W
R3621	06E36655S01	RES,CF. 47K-1/4W
R3622	06E35237S01	RES,CF. 1K-1/4W
R3623	06E35237S01	RES,CF. 1K-1/4W
R3624	06E36655S01	RES,CF. 47K-1/4W
R3625	06E36463S01	RES,CF. 10K-1/16W
R3626	06E36463S01	RES,CF. 10K-1/16W
R3627	06E36463S01	RES,CF. 10K-1/16W
R3628	06E36463S01	RES,CF. 10K-1/16W
R3633	06E40736S01	RES,CF. 680-1/10W
R3634	06E40736S01	RES,CF. 680-1/10W
R3635	06E40736S01	RES,CF. 680-1/10W
R3636	06E40736S01	RES,CF. 680-1/10W
R3641	06E36616S01	RES,CF. 100-1/16W
R3642	06E36616S01	RES,CF. 100-1/16W
R3643	06E36616S01	RES,CF. 100-1/16W
R3644	06E36616S01	RES,CF. 100-1/16W
R3646	06E40739S01	RES,CF. 4.3K-1/16W
R3647	06E40739S01	RES,CF. 4.3K-1/16W
R3650	06E40739S01	RES,CF. 4.3K-1/16W
R3651	06E40739S01	RES,CF. 4.3K-1/16W
R3653	06E40738S01	RES,CF. 3.3K-1/16W
R3654	06E40320S01	RES,CF. 8.2K-1/16W
R3655	06E40320S01	RES,CF. 8.2K-1/16W
R3656	06E40738S01	RES,CF. 3.3K-1/16W
R3657	06E40738S01	RES,CF. 3.3K-1/16W
R3658	06E40320S01	RES,CF. 8.2K-1/16W
R3659	06E40320S01	RES,CF. 8.2K-1/16W
R3660	06E40738S01	RES,CF. 3.3K-1/16W
R3661	06E40745S01	RES,CF. 47K-1/16W
R3662	06E40745S01	RES,CF. 47K-1/16W
R3663	06E40745S01	RES,CF. 47K-1/16W
R3664	06E40745S01	RES,CF. 47K-1/16W
R3665	06E40321S01	RES,CF. 10K-1/16W
R3666	06E40321S01	RES,CF. 10K-1/16W
R3667	06E40321S01	RES,CF. 10K-1/16W
R3668	06E40321S01	RES,CF. 10K-1/16W
R3669	06E40320S01	RES,CF. 8.2K-1/16W
R3670	06E40743S01	RES,CF. 9.1K-1/16W
R3671	06E40743S01	RES,CF. 9.1K-1/16W
R3672	06E40320S01	RES,CF. 8.2K-1/16W
R3673	06E40320S01	RES,CF. 8.2K-1/16W
R3674	06E40743S01	RES,CF. 9.1K-1/16W
R3675	06E40743S01	RES,CF. 9.1K-1/16W
R3676	06E40320S01	RES,CF. 8.2K-1/16W
R3681	06E36464S01	RES,CF. 0-1/16W
R3682	06E36464S01	RES,CF. 0-1/16W
R3685	06E36464S01	RES,CF. 0-1/16W
R3686	06E36463S01	RES,CF. 10K-1/16W
R3687	06E36463S01	RES,CF. 10K-1/16W
R3688	06E31680S01	RES,CF. 680-1/16W
R3689	06E40318S01	RES,CF. 5.6K-1/16W
R3690	06E40318S01	RES,CF. 5.6K-1/16W
R3691	06E31680S01	RES,CF. 680-1/16W
R3692	06E36464S01	RES,CF. 0-1/16W
R3693	06E40752S01	RES,CF. 51K-1/4W
R3694	06E40750S01	RES,CF. 1.1K-1/4W

R3695	06E40750S01	RES,CF. 1.1K-1/4W
R3696	06E40752S01	RES,CF. 51K-1/4W
R3697	06E36463S01	RES,CF. 10K-1/16W
R3698	06E36463S01	RES,CF. 10K-1/16W
R3701	06E31800S01	RES,CF. 150-1/16W
R3702	06E31800S01	RES,CF. 150-1/16W
R3703	06E31800S01	RES,CF. 150-1/16W
R3704	06E39848S01	RES,CF. 6.8-1/16W
R3705	06E39848S01	RES,CF. 6.8-1/16W
R3706	06E39848S01	RES,CF. 6.8-1/16W
R3707	06E31800S01	RES,CF. 150-1/16W
R3708	06E31800S01	RES,CF. 150-1/16W
R3709	06E31800S01	RES,CF. 150-1/16W
R3710	06E31800S01	RES,CF. 150-1/16W
R3711	06E31800S01	RES,CF. 150-1/16W
R3712	06E31800S01	RES,CF. 150-1/16W
R3713	06E39848S01	RES,CF. 6.8-1/16W
R3714	06E39848S01	RES,CF. 6.8-1/16W
R3715	06E39848S01	RES,CF. 6.8-1/16W
R3716	06E31800S01	RES,CF. 150-1/16W
R3717	06E31800S01	RES,CF. 150-1/16W
R3718	06E31800S01	RES,CF. 150-1/16W
R3719	06E31800S01	RES,CF. 150-1/16W
R3720	06E31800S01	RES,CF. 150-1/16W
R3721	06E31800S01	RES,CF. 150-1/16W
R3722	06E39848S01	RES,CF. 6.8-1/16W
R3723	06E39848S01	RES,CF. 6.8-1/16W
R3724	06E39848S01	RES,CF. 6.8-1/16W
R3725	06E31800S01	RES,CF. 150-1/16W
R3726	06E31800S01	RES,CF. 150-1/16W
R3727	06E31800S01	RES,CF. 150-1/16W
R3728	06E31800S01	RES,CF. 150-1/16W
R3729	06E31800S01	RES,CF. 150-1/16W
R3730	06E31800S01	RES,CF. 150-1/16W
R3731	06E39848S01	RES,CF. 6.8-1/16W
R3732	06E39848S01	RES,CF. 6.8-1/16W
R3733	06E39848S01	RES,CF. 6.8-1/16W
R3734	06E31800S01	RES,CF. 150-1/16W
R3735	06E31800S01	RES,CF. 150-1/16W
R3736	06E31800S01	RES,CF. 150-1/16W
R3741	06E32310S01	RES,CF. 82-1/16W
R3742	06E32310S01	RES,CF. 82-1/16W
R3743	06E32310S01	RES,CF. 82-1/16W
R3744	06E39848S01	RES,CF. 6.8-1/16W
R3745	06E39848S01	RES,CF. 6.8-1/16W
R3746	06E39848S01	RES,CF. 6.8-1/16W
R3747	06E32310S01	RES,CF. 82-1/16W
R3748	06E32310S01	RES,CF. 82-1/16W
R3749	06E32310S01	RES,CF. 82-1/16W
R3750	06E32310S01	RES,CF. 82-1/16W
R3751	06E32310S01	RES,CF. 82-1/16W
R3752	06E32310S01	RES,CF. 82-1/16W
R3753	06E39848S01	RES,CF. 6.8-1/16W
R3754	06E39848S01	RES,CF. 6.8-1/16W
R3755	06E39848S01	RES,CF. 6.8-1/16W
R3756	06E32310S01	RES,CF. 82-1/16W
R3757	06E32310S01	RES,CF. 82-1/16W

R3758	06E32310S01	RES,CF. 82-1/16W
R3759	06E40731S01	RES,CF. 130K-1/16W
R3760	06E40731S01	RES,CF. 130K-1/16W
R3901	06E35391S01	RES,CF. 62K-1/16W
R3902	06E35391S01	RES,CF. 62K-1/16W
R4001	06E22113S01	RES,CF. 22-1/4W
R4002	06E22113S01	RES,CF. 22-1/4W
R4003	06E22113S01	RES,CF. 22-1/4W
R4004	06E22113S01	RES,CF. 22-1/4W
R4005	06E22113S01	RES,CF. 22-1/4W
R4006	06E22113S01	RES,CF. 22-1/4W
R4007	06E22113S01	RES,CF. 22-1/4W
R4008	06E22113S01	RES,CF. 22-1/4W
R4009	06E22113S01	RES,CF. 22-1/4W
R4010	06E22113S01	RES,CF. 22-1/4W
R4011	06E22113S01	RES,CF. 22-1/4W
R4012	06E22113S01	RES,CF. 22-1/4W
R4013	06E22113S01	RES,CF. 22-1/4W
R4014	06E22113S01	RES,CF. 22-1/4W
R4015	06E22113S01	RES,CF. 22-1/4W
R4016	06E22113S01	RES,CF. 22-1/4W
R4017	06E40361S01	RES,M. OXIDE 20-3W
R4018	06E40361S01	RES,M. OXIDE 20-3W
R4019	06E40361S01	RES,M. OXIDE 20-3W
R4020	06E40361S01	RES,M. OXIDE 20-3W
R4021	06E40361S01	RES,M. OXIDE 20-3W
R4022	06E40361S01	RES,M. OXIDE 20-3W
R4023	06E40361S01	RES,M. OXIDE 20-3W
R4024	06E40361S01	RES,M. OXIDE 20-3W
R4031	06E22113S01	RES,CF. 22-1/4W
R4032	06E22113S01	RES,CF. 22-1/4W
R4033	06E22113S01	RES,CF. 22-1/4W
R4034	06E22113S01	RES,CF. 22-1/4W
R4035	06E22113S01	RES,CF. 22-1/4W
R4036	06E22113S01	RES,CF. 22-1/4W
R4037	06E22113S01	RES,CF. 22-1/4W
R4038	06E22113S01	RES,CF. 22-1/4W
R4039	06E40361S01	RES,M. OXIDE 20-3W
R4040	06E40361S01	RES,M. OXIDE 20-3W
R4041	06E40361S01	RES,M. OXIDE 20-3W
R4042	06E40361S01	RES,M. OXIDE 20-3W
R4101	06E36464S01	RES,CF. 0-1/16W
R4102	06E36464S01	RES,CF. 0-1/16W
R4103	06E36559S01	RES,CF. 47K-1/16W
R4104	06E36464S01	RES,CF. 0-1/16W
R4105	06E36464S01	RES,CF. 0-1/16W
R4108	06E36463S01	RES,CF. 10K-1/16W
R4117	06E40741S01	RES,CF. 6.8K-1/16W
R4118	06E40751S01	RES,CF. 330-1/4W
R4119	06E40751S01	RES,CF. 330-1/4W
R4120	06E40741S01	RES,CF. 6.8K-1/16W
R4125	06E40742S01	RES,CF. 7.5K-1/16W
R4126	06E40742S01	RES,CF. 7.5K-1/16W
R4135	06E40743S01	RES,CF. 9.1K-1/16W
R4136	06E40749S01	RES,CF. 820-1/4W
R4137	06E40749S01	RES,CF. 820-1/4W
R4138	06E40743S01	RES,CF. 9.1K-1/16W

R4139	06E36464S01	RES,CF. 0-1/16W
R4140	06E36464S01	RES,CF. 0-1/16W
R4141	06E36464S01	RES,CF. 0-1/16W
R4142	06E36464S01	RES,CF. 0-1/16W
R4144	06E36463S01	RES,CF. 10K-1/16W
R4145	06E36464S01	RES,CF. 0-1/16W
R4146	06E36464S01	RES,CF. 0-1/16W
R4147	06E40324S01	RES,CF. 27K-1/16W
R4148	06E40324S01	RES,CF. 27K-1/16W
R4149	06E36623S01	RES,CF. 1M-1/16W
R4201	06E35136S01	RES,CF. 2.2-1/16W
R4202	06E35136S01	RES,CF. 2.2-1/16W
R4203	06E35136S01	RES,CF. 2.2-1/16W
R4204	06E35136S01	RES,CF. 2.2-1/16W
R4401	06E36615S01	RES,CF. 5.6K-1/4W
R4402	06E36615S01	RES,CF. 5.6K-1/4W
R4403	06E36615S01	RES,CF. 5.6K-1/4W
R4404	06E36615S01	RES,CF. 5.6K-1/4W
R4405	06E36463S01	RES,CF. 10K-1/16W
R4406	06E36586S01	RES,CF. 22K-1/16W
R4407	06E36615S01	RES,CF. 5.6K-1/4W
R4451	06E36615S01	RES,CF. 5.6K-1/4W
R4452	06E36615S01	RES,CF. 5.6K-1/4W
R4701	06E36463S01	RES,CF. 10K-1/16W
R4703	06E36586S01	RES,CF. 22K-1/16W
R4704	06E36586S01	RES,CF. 22K-1/16W
R4705	06E36463S01	RES,CF. 10K-1/16W
R4706	06E36463S01	RES,CF. 10K-1/16W
R4707	06E36600S01	RES,CEMENT 0.01-5W
R4708	06E40746S01	RES,CF. 75K-1/16W
R4709	06E40314S01	RES,CF. 1.1K-1/16W
R4710	06E40732S01	RES,CF. 51-1/16W
R4711	06E36464S01	RES,CF. 0-1/16W
R4901	06E40743S01	RES,CF. 9.1K-1/16W
R4902	06E40743S01	RES,CF. 9.1K-1/16W
R4903	06E40743S01	RES,CF. 9.1K-1/16W
R4904	06E40743S01	RES,CF. 9.1K-1/16W
R4905	06E40743S01	RES,CF. 9.1K-1/16W
R4906	06E40743S01	RES,CF. 9.1K-1/16W
R4907	06E36622S01	RES,CF. 100K-1/16W
R4908	06E37259S01	RES,CF. 6.8K-1/16W
R5001	06E40318S01	RES,CF. 5.6K-1/16W
R5002	06E40316S01	RES,CF. 2K-1/16W
R5003	06E40315S01	RES,CF. 1.2K-1/16W
R5004	06E36463S01	RES,CF. 10K-1/16W
R5005	06E40317S01	RES,CF. 3.9K-1/16W
R5006	06E40318S01	RES,CF. 5.6K-1/16W
R5007	06E40315S01	RES,CF. 1.2K-1/16W
R5008	06E40321S01	RES,CF. 10K-1/16W
R5009	06E40315S01	RES,CF. 1.2K-1/16W
R5010	06E36463S01	RES,CF. 10K-1/16W
R5012	06E36464S01	RES,CF. 0-1/16W
R5013	06E36463S01	RES,CF. 10K-1/16W
R5014	06E40740S01	RES,CF. 5.1K-1/16W
R5015	06E40735S01	RES,CF. 620-1/16W
R5016	06E36462S01	RES,CF. 4.7K-1/16W
R5017	06E36463S01	RES,CF. 10K-1/16W

R5018	06E36463S01	RES,CF. 10K-1/16W
R5019	06E40189S01	RES,CF. 15K-1/16
R5020	06E40189S01	RES,CF. 15K-1/16
R5021	06E36463S01	RES,CF. 10K-1/16W
R5022	06E36463S01	RES,CF. 10K-1/16W
R5023	06E36586S01	RES,CF. 22K-1/16W
R8001	06E36584S01	RES,CF. 820-1/16W
R8002	06E36584S01	RES,CF. 820-1/16W
R8003	06E36584S01	RES,CF. 820-1/16W
R8004	06E36584S01	RES,CF. 820-1/16W
R8005	06E32033S01	RES,CF. 910-1/16W
R8006	06E36618S01	RES,CF. 1K-1/16W
R9101	06E36581S01	RES,CF. 30K-1/4W
R9102	06E36580S01	RES,CF. 2.2K-1/4W
R9103	06E36102S01	RES,CF. 30K-1/16W
R9104	06E36580S01	RES,CF. 2.2K-1/4W
R9105	06E36580S01	RES,CF. 2.2K-1/4W
R9106	06E36559S01	RES,CF. 47K-1/16W
R9107	06E36580S01	RES,CF. 2.2K-1/4W
R9301	06E35516S01	RES,CF. 82K-1/16W
R9302	06E35516S01	RES,CF. 82K-1/16W
R9501	06E36462S01	RES,CF. 4.7K-1/16W
R9502	06E36463S01	RES,CF. 10K-1/16W
R9503	06E36559S01	RES,CF. 47K-1/16W
R9504	06E36463S01	RES,CF. 10K-1/16W
R9505	06E36559S01	RES,CF. 47K-1/16W
R9506	06E36559S01	RES,CF. 47K-1/16W
R9507	06E36559S01	RES,CF. 47K-1/16W
R9508	06E36559S01	RES,CF. 47K-1/16W
R9601	06E40734S01	RES,CF. 560-1/16W
R9602	06E40741S01	RES,CF. 6.8K-1/16W
R9701	06E36462S01	RES,CF. 4.7K-1/16W
R9702	06E36584S01	RES,CF. 820-1/16W
R9704	06E36585S01	RES,CF. 2.2K-1/16W
R9706	06E40230S01	RES,CF. 1.8K-1/16W
R9707	06E36464S01	RES,CF. 0-1/16W
R9708	06E40231S01	RES,CF. 2.7K-1/16W
R9709	06E28536S01	RES,CF. 82K-1/16W
R9710	06E36464S01	RES,CF. 0-1/16W
R9711	06E36587S01	RES,CF. 24K-1/16W
R9712	06E40748S01	RES,CF. 2.7K-1/16W
R9713	06E36579S01	RES,CF. 1K-1/4W
R9714	06E36579S01	RES,CF. 1K-1/4W
R9801	06E23900S01	RES,CF. 20-1/4W
R9802	06E23900S01	RES,CF. 20-1/4W
R9901	06E40613S01	RES,CF. 22-1/16W
R9902	06E40613S01	RES,CF. 22-1/16W
R9903	06E40613S01	RES,CF. 22-1/16W
R9904	06E40613S01	RES,CF. 22-1/16W
R9905	06E40613S01	RES,CF. 22-1/16W
R9906	06E40613S01	RES,CF. 22-1/16W
R9907	06E40613S01	RES,CF. 22-1/16W
R9908	06E40613S01	RES,CF. 22-1/16W
R9909	06E36555S01	RES,CF. 33-1/4W
R9910	06E36555S01	RES,CF. 33-1/4W
R9911	06E36555S01	RES,CF. 33-1/4W
R9912	06E36555S01	RES,CF. 33-1/4W

R9913	06E40747S01	RES,CF. 91K-1/16W
R9914	06E40747S01	RES,CF. 91K-1/16W
RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
SW1501	40E20895S01	SW,SLIDE SSAF
SW1502	40E20895S01	SW,SLIDE SSAF
T9001	24E40780S01	CHOKE,TRANS PMAL606A
T9901	25E40779S01	TRANS,POWER PMAL606A
TH3801	48E40346S01	THERMISTOR,10K
TH3802	48E40346S01	THERMISTOR,10K
TH3803	48E40346S01	THERMISTOR,10K
TH3804	48E40346S01	THERMISTOR,10K
TH4101	48E40530S01	THERMISTOR,100K
TH5001	48E40530S01	THERMISTOR,100K
TH9601	48E40530S01	THERMISTOR,100K
ZD4901	48E39120S01	DIODE,ZENER HZK12A2L
ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
ZD9502	48E39119S01	DIODE,ZENER HZK16-1L

=====LED P.W.Board

C8004	08E37122S01	CAP,CER. 0.1uF/25V
CH8001	09E33654S01	ASSY,CONN 2P
LD8004	48E39343S01	LED,BLU UB1106W
R8009	06E36584S01	RES,CF. 820-1/16W
R8010	06E36584S01	RES,CF. 820-1/16W

=====Miscellaneous

CB4201	09E40782S01	CONN,WTB 14P
F001	65E38096S01	FUSE,AUTO 30A
F002	65E38096S01	FUSE,AUTO 30A
JK1001	09E40561S01	CONN,RCA 6P
TML9001	29E39747S01	TERMINAL,JSZ3-36GDBH
VOL1401	18E29471S01	VR,50k
VOL1402	18E29471S01	VR,50k
VOL1403	18E29471S01	VR,50k
VOL1501	18E34147S01	VR,20k
VOL1502	18E34147S01	VR,20k
VOL1551	18E34147S01	VR,20k

Cabinet Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

1	-----	HEAT,SINK-MAIN
2	13E40786S01	PANEL,SIDE-R
3	13E40787S01	PANEL,SIDE-L
4	13E40785S01	PANEL,FACE-TOP
5	03E39676S01	SCR,M2.6X7(B)(BLK)
6	03E39512S01	SCR,M3X10(P)(WHT)
7	03E40354S01	SCR,M2.6X8(TR)(BLK)
8	-----	CHAS,FRONT
9	-----	HEAT,SINK-SUB(D)
10	-----	HEAT,SINK-SUB(B)(F)
11	-----	HEAT,SINK-SUB(C)(B)
12	14E40783S01	INS,GAPPAD-MONO FET
13	14E40784S01	INSULATOR,SILPAD
14	15E40381S01	COVER,SWITCH
15	03E38671S01	SCR,M3X6(B)
16	03E39167S01	SCR,M3X12(P)(BLK)
17	-----	SUPPORT,PWB
18	03E39165S01	SCR,M3X11(WP)(WHT)
19	-----	HEAT,SINK-SUB(B)(S)
20	03E40148S01	SCR,M3X11(WS)(YEL)
21	03E40789S01	SCR,M3X9 (WS)(WHT))
22	-----	COVER,BOTTOM
23	-----	CHAS,REAR
24	-----	COVER,REAR
25	03E38698S01	SCR,M3X8(P)(BLK)
26	-----	COVER,DOOR(F)
27	33E39157S01	PLATE,NAME
28	16E39454S01	CAP, TOP
29	03E39505S01	SCR,M3X10(F)(BLK)
30	03E39507S01	SCR,M2.6X8(B)(BLK)
31	15E39484S01	GUIDE,HOLDER
32	33E39669S01	PLATE,NAME-F
35	61E39465S01	LENS,FRONT-L
36	61E39464S01	LENS,FRONT-R
37	14E39753S01	INSULATOR,GAPPAD-FET
38	14E39754S01	INSULATOR,GAPPAD-COIL
39	14E39777S01	INSULATOR,GAPPAD-REG
42	61E39462S01	LENS,LED
43	75E39683S01	SHEET,DIFFUSION
44	09E39674S01	HOLDER,LED
45	61E39911S01	LENS,BASE
46	07E39673S01	BKT,VOL
47	07E40788S01	BKT,VOL(2P)