

# FLTK 1.3.0 Programming Manual



Revision 8 by Michael Sweet, Craig P. Earls,  
Matthias Melcher, and Bill Spitzak.

Copyright 1998-2008 by Bill Spitzak and others.

Generated by Doxygen 1.5.7.1

Mon Oct 6 20:25:35 2008



# Contents

<b>1</b>	<b>FLTK Programming Manual</b>	<b>1</b>
<b>2</b>	<b>Preface</b>	<b>3</b>
2.1	Organization . . . . .	4
2.2	Conventions . . . . .	5
2.3	Abbreviations . . . . .	5
2.4	Copyrights and Trademarks . . . . .	5
<b>3</b>	<b>1 - Introduction to FLTK</b>	<b>7</b>
3.1	History of FLTK . . . . .	8
3.2	Features . . . . .	8
3.3	Licensing . . . . .	9
3.4	What Does "FLTK" Mean? . . . . .	9
3.5	Building and Installing FLTK Under UNIX and MacOS X . . . . .	10
3.6	Building FLTK Under Microsoft Windows . . . . .	11
3.6.1	Using the Visual C++ DLL Library . . . . .	12
3.7	Building FLTK Under OS/2 . . . . .	12
3.8	Internet Resources . . . . .	12
3.9	Reporting Bugs . . . . .	13
<b>4</b>	<b>2 - FLTK Basics</b>	<b>15</b>
4.1	Writing Your First FLTK Program . . . . .	16
4.1.1	Creating the Widgets . . . . .	17
4.1.2	Creating Widget hierarchies . . . . .	17
4.1.3	Get/Set Methods . . . . .	17
4.1.4	Redrawing After Changing Attributes . . . . .	17
4.1.5	Labels . . . . .	17
4.1.6	Showing the Window . . . . .	18
4.1.7	The Main Event Loop . . . . .	18

4.2	Compiling Programs with Standard Compilers . . . . .	18
4.3	Compiling Programs with Microsoft Visual C++ . . . . .	19
4.4	Naming . . . . .	20
4.5	Header Files . . . . .	20
<b>5</b>	<b>3 - Common Widgets and Attributes</b>	<b>21</b>
5.1	Buttons . . . . .	22
5.2	Text . . . . .	22
5.3	Valuators . . . . .	23
5.4	Groups . . . . .	23
5.5	Setting the Size and Position of Widgets . . . . .	24
5.6	Colors . . . . .	24
5.7	Box Types . . . . .	25
5.7.1	Box Types . . . . .	25
5.8	Labels and Label Types . . . . .	27
5.9	Callbacks . . . . .	29
5.10	Shortcuts . . . . .	30
<b>6</b>	<b>5 - Drawing Things in FLTK</b>	<b>31</b>
6.1	When Can You Draw Things in FLTK? . . . . .	32
6.2	Drawing Functions . . . . .	32
6.2.1	Boxes . . . . .	33
6.2.2	Clipping . . . . .	33
6.3	Colors . . . . .	34
6.3.1	Line Dashes and Thickness . . . . .	35
6.3.2	Drawing Fast Shapes . . . . .	36
6.3.3	Drawing Complex Shapes . . . . .	38
6.3.4	Drawing Text . . . . .	40
6.3.5	Fonts . . . . .	41
6.3.6	Character Encoding . . . . .	42
6.3.7	Drawing Overlays . . . . .	42
6.4	Drawing Images . . . . .	43
6.4.1	Direct Image Drawing . . . . .	43
6.4.2	Direct Image Reading . . . . .	44
6.4.3	Image Classes . . . . .	45
6.4.4	Offscreen Drawing . . . . .	46
<b>7</b>	<b>4 - Designing a Simple Text Editor</b>	<b>47</b>

7.1	Determining the Goals of the Text Editor . . . . .	48
7.2	Designing the Main Window . . . . .	48
7.3	Variables . . . . .	48
7.4	Menubars and Menus . . . . .	49
7.5	Editing the Text . . . . .	49
7.6	The Replace Dialog . . . . .	50
7.7	Callbacks . . . . .	50
7.7.1	changed_cb() . . . . .	50
7.7.2	copy_cb() . . . . .	50
7.7.3	cut_cb() . . . . .	50
7.7.4	delete_cb() . . . . .	51
7.7.5	find_cb() . . . . .	51
7.7.6	find2_cb() . . . . .	51
7.7.7	new_cb() . . . . .	51
7.7.8	open_cb() . . . . .	52
7.7.9	paste_cb() . . . . .	52
7.7.10	quit_cb() . . . . .	52
7.7.11	replace_cb() . . . . .	52
7.7.12	replace2_cb() . . . . .	53
7.7.13	replall_cb() . . . . .	53
7.7.14	replcan_cb() . . . . .	54
7.7.15	save_cb() . . . . .	54
7.7.16	saveas_cb() . . . . .	54
7.8	Other Functions . . . . .	54
7.8.1	check_save() . . . . .	55
7.8.2	load_file() . . . . .	55
7.8.3	save_file() . . . . .	55
7.8.4	set_title() . . . . .	56
7.9	The main() Function . . . . .	56
7.10	Compiling the Editor . . . . .	56
7.11	The Final Product . . . . .	57
7.12	Advanced Features . . . . .	57
7.12.1	Syntax Highlighting . . . . .	57
8	<b>6 - Handling Events</b> . . . . .	63
8.1	The FLTK Event Model . . . . .	64
8.2	Mouse Events . . . . .	64

8.2.1	FL_PUSH . . . . .	64
8.2.2	FL_DRAG . . . . .	64
8.2.3	FL_RELEASE . . . . .	64
8.2.4	FL_MOVE . . . . .	64
8.2.5	FL_MOUSEWHEEL . . . . .	64
8.3	Focus Events . . . . .	65
8.3.1	FL_ENTER . . . . .	65
8.3.2	FL_LEAVE . . . . .	65
8.3.3	FL_FOCUS . . . . .	65
8.3.4	FL_UNFOCUS . . . . .	65
8.4	Keyboard Events . . . . .	65
8.4.1	FL_KEYDOWN, FL_KEYUP . . . . .	65
8.4.2	FL_SHORTCUT . . . . .	66
8.5	Widget Events . . . . .	66
8.5.1	FL_DEACTIVATE . . . . .	66
8.5.2	FL_ACTIVATE . . . . .	66
8.5.3	FL_HIDE . . . . .	66
8.5.4	FL_SHOW . . . . .	66
8.6	Clipboard Events . . . . .	66
8.6.1	FL_PASTE . . . . .	66
8.6.2	FL_SELECTIONCLEAR . . . . .	66
8.7	Drag and Drop Events . . . . .	67
8.7.1	FL_DND_ENTER . . . . .	67
8.7.2	FL_DND_DRAG . . . . .	67
8.7.3	FL_DND_LEAVE . . . . .	67
8.7.4	FL_DND_RELEASE . . . . .	67
8.8	Fl::event_*() methods . . . . .	67
8.9	Event Propagation . . . . .	68
8.10	FLTK Compose-Character Sequences . . . . .	69
<b>9</b>	<b>7 - Adding and Extending Widgets</b>	<b>71</b>
9.1	Subclassing . . . . .	72
9.2	Making a Subclass of Fl_Widget . . . . .	72
9.3	The Constructor . . . . .	72
9.4	Protected Methods of Fl_Widget . . . . .	73
9.5	Handling Events . . . . .	75
9.6	Drawing the Widget . . . . .	76

9.7 Resizing the Widget . . . . .	76
9.8 Making a Composite Widget . . . . .	77
9.9 Cut and Paste Support . . . . .	78
9.10 Drag And Drop Support . . . . .	79
9.11 Making a subclass of Fl_Window . . . . .	79
<b>10 8 - Using OpenGL</b> . . . . .	<b>81</b>
10.1 Using OpenGL in FLTK . . . . .	82
10.2 Making a Subclass of Fl_Gl_Window . . . . .	82
10.2.1 Defining the Subclass . . . . .	82
10.2.2 The draw() Method . . . . .	83
10.2.3 The handle() Method . . . . .	83
10.3 Using OpenGL in Normal FLTK Windows . . . . .	84
10.4 OpenGL Drawing Functions . . . . .	85
10.5 Speeding up OpenGL . . . . .	86
10.6 Using OpenGL Optimizer with FLTK . . . . .	86
<b>11 9 - Programming with FLUID</b> . . . . .	<b>89</b>
11.1 What is FLUID? . . . . .	90
11.2 Running FLUID Under UNIX . . . . .	90
11.3 Running FLUID Under Microsoft Windows . . . . .	91
11.4 Compiling .fl files . . . . .	91
11.5 A Short Tutorial . . . . .	92
11.5.1 The CubeView Class . . . . .	92
11.5.2 The CubeViewUI Class . . . . .	95
11.5.3 Adding Constructor Initialization Code . . . . .	97
11.5.4 Generating the Code . . . . .	97
11.6 FLUID Reference . . . . .	97
11.6.1 The Widget Browser . . . . .	97
11.6.2 Menu Items . . . . .	97
11.6.3 The Widget Panel . . . . .	102
11.7 GUI Attributes . . . . .	103
11.7.1 Style Attributes . . . . .	104
11.7.2 C++ Attributes . . . . .	105
11.8 Selecting and Moving Widgets . . . . .	107
11.9 Image Labels . . . . .	108
11.10 Internationalization with FLUID . . . . .	110

11.10.1 I18N Methods . . . . .	110
11.10.2 Using GNU gettext for I18N . . . . .	110
11.10.3 Using POSIX catgets for I18N . . . . .	110
11.11 Known limitations . . . . .	111
<b>12 10 - Advanced FLTK</b>	<b>113</b>
12.1 Multithreading . . . . .	114
<b>13 11 - Unicode and utf-8 Support</b>	<b>117</b>
13.1 About Unicode and utf-8 . . . . .	118
13.2 Unicode in FLTK . . . . .	118
<b>14 C - FLTK Enumerations</b>	<b>121</b>
14.1 Version Numbers . . . . .	122
14.2 Events . . . . .	122
14.3 Callback "When" Conditions . . . . .	123
14.4 Fl::event_button() Values . . . . .	123
14.5 Fl::event_key() Values . . . . .	124
14.6 Fl::event_state() Values . . . . .	125
14.7 Alignment Values . . . . .	125
14.8 Fonts . . . . .	126
14.9 Colors . . . . .	126
14.9.1 Color Constants . . . . .	127
14.10 Cursors . . . . .	128
14.11 FD "When" Conditions . . . . .	128
14.12 Damage Masks . . . . .	128
<b>15 D - GLUT Compatibility</b>	<b>129</b>
15.1 Using the GLUT Compatibility Header File . . . . .	130
15.2 Known Problems . . . . .	130
15.3 Mixing GLUT and FLTK Code . . . . .	131
15.4 class Fl_Glut_Window . . . . .	131
<b>16 E - Forms Compatibility</b>	<b>133</b>
16.1 Importing Forms Layout Files . . . . .	134
16.2 Using the Compatibility Header File . . . . .	134
16.3 Problems You Will Encounter . . . . .	134
16.4 Additional Notes . . . . .	136

<b>17 F - Operating System Issues</b>	<b>139</b>
17.1 Accessing the OS Interfaces . . . . .	140
17.2 The UNIX (X11) Interface . . . . .	140
17.2.1 Handling Other X Events . . . . .	140
17.2.2 Drawing using Xlib . . . . .	141
17.2.3 Changing the Display, Screen, or X Visual . . . . .	141
17.2.4 Using a Subclass of Fl_Window for Special X Stuff . . . . .	142
17.2.5 Setting the Icon of a Window . . . . .	144
17.2.6 X Resources . . . . .	144
17.3 The Windows (WIN32) Interface . . . . .	145
17.3.1 Handling Other WIN32 Messages . . . . .	145
17.3.2 Drawing Things Using the WIN32 GDI . . . . .	146
17.3.3 Setting the Icon of a Window . . . . .	146
17.3.4 How to Not Get a MSDOS Console Window . . . . .	146
17.3.5 Known WIN32 Bugs and Problems . . . . .	147
17.4 The MacOS Interface . . . . .	147
17.4.1 Apple "Quit" Event . . . . .	147
17.4.2 Apple "Open" Event . . . . .	148
17.4.3 Drawing Things Using QuickDraw . . . . .	148
17.4.4 Drawing Things Using Quartz . . . . .	148
17.4.5 Mac File System Specifics . . . . .	148
17.4.6 Known MacOS Bugs and Problems . . . . .	149
<b>18 G - Migrating Code from FLTK 1.0 to 1.1</b>	<b>151</b>
18.1 Color Values . . . . .	152
18.2 Cut and Paste Support . . . . .	152
18.3 File Chooser . . . . .	152
18.4 Function Names . . . . .	152
18.5 Image Support . . . . .	153
18.6 Keyboard Navigation . . . . .	153
<b>19 H - Migrating Code from FLTK 1.1 to 1.3</b>	<b>155</b>
<b>20 I - Developer Information</b>	<b>157</b>
20.1 Non-ASCII characters . . . . .	160
20.2 Document Structure . . . . .	161
20.3 Creating Links . . . . .	161
20.4 Changing Old Links . . . . .	162

20.5 Paragraph Layout . . . . .	163
20.6 Hack for missing "tiny.gif" file . . . . .	164
20.7 5 Navigation Proposals . . . . .	164
<b>21 J - Software License</b>	<b>165</b>
<b>22 K - Example Source Code</b>	<b>167</b>
22.1 Example Applications . . . . .	168
22.1.1 adjuster . . . . .	168
22.1.2 arc . . . . .	168
22.1.3 ask . . . . .	168
22.1.4 bitmap . . . . .	168
22.1.5 blocks . . . . .	169
22.1.6 boxtyle . . . . .	169
22.1.7 browser . . . . .	169
22.1.8 button . . . . .	169
22.1.9 buttons . . . . .	169
22.1.10 checkers . . . . .	169
22.1.11 clock . . . . .	169
22.1.12 colrowser . . . . .	170
22.1.13 color_chooser . . . . .	170
22.1.14 cube . . . . .	170
22.1.15 CubeView . . . . .	170
22.1.16 cursor . . . . .	170
22.1.17 curve . . . . .	170
22.1.18 demo . . . . .	170
22.1.19 doublebuffer . . . . .	171
22.1.20 editor . . . . .	171
22.1.21 fast_slow . . . . .	171
22.1.22 file_chooser . . . . .	171
22.1.23 fonts . . . . .	171
22.1.24 forms . . . . .	171
22.1.25 fractals . . . . .	171
22.1.26 fullscreen . . . . .	172
22.1.27 gl_overlay . . . . .	172
22.1.28 glpuzzle . . . . .	172
22.1.29 hello . . . . .	172

22.1.30 help . . . . .	172
22.1.31 iconize . . . . .	172
22.1.32 image . . . . .	172
22.1.33 inactive . . . . .	173
22.1.34 input . . . . .	173
22.1.35 input_choice . . . . .	173
22.1.36 keyboard . . . . .	173
22.1.37 label . . . . .	173
22.1.38 line_style . . . . .	173
22.1.39 list_visuals . . . . .	173
22.1.40 mandelbrot . . . . .	174
22.1.41 menubar . . . . .	174
22.1.42 message . . . . .	174
22.1.43 minimum . . . . .	174
22.1.44 navigation . . . . .	174
22.1.45 output . . . . .	174
22.1.46 overlay . . . . .	174
22.1.47 pack . . . . .	175
22.1.48 pixmap_browser . . . . .	175
22.1.49 pixmap . . . . .	175
22.1.50 preferences . . . . .	175
22.1.51 radio . . . . .	175
22.1.52 resizebox . . . . .	175
22.1.53 resize . . . . .	175
22.1.54 scroll . . . . .	175
22.1.55 shape . . . . .	176
22.1.56 subwindow . . . . .	176
22.1.57 sudoku . . . . .	176
22.1.58 symbols . . . . .	176
22.1.59 tabs . . . . .	176
22.1.60 threads . . . . .	176
22.1.61 tile . . . . .	177
22.1.62 tiled_image . . . . .	177
22.1.63 valuators . . . . .	177
22.1.64 fluid . . . . .	177

<b>24 Deprecated List</b>	<b>183</b>
<b>25 Module Index</b>	<b>185</b>
25.1 Modules . . . . .	185
<b>26 Class Index</b>	<b>187</b>
26.1 Class Hierarchy . . . . .	187
<b>27 Class Index</b>	<b>191</b>
27.1 Class List . . . . .	191
<b>28 File Index</b>	<b>195</b>
28.1 File List . . . . .	195
<b>29 Module Documentation</b>	<b>201</b>
29.1 Windows handling functions . . . . .	201
29.1.1 Detailed Description . . . . .	202
29.1.2 Function Documentation . . . . .	202
29.1.2.1 default_atclose . . . . .	202
29.1.2.2 first_window . . . . .	202
29.1.2.3 grab . . . . .	202
29.1.2.4 grab . . . . .	202
29.1.2.5 modal . . . . .	203
29.1.2.6 next_window . . . . .	203
29.1.2.7 set_atclose . . . . .	203
29.1.3 Variable Documentation . . . . .	203
29.1.3.1 atclose . . . . .	203
29.2 Events handling functions . . . . .	204
29.2.1 Detailed Description . . . . .	206
29.2.2 Function Documentation . . . . .	206
29.2.2.1 add_handler . . . . .	206
29.2.2.2 belowmouse . . . . .	207
29.2.2.3 belowmouse . . . . .	207
29.2.2.4 compose . . . . .	207
29.2.2.5 compose_reset . . . . .	208
29.2.2.6 event . . . . .	208
29.2.2.7 event_alt . . . . .	208
29.2.2.8 event_button . . . . .	208
29.2.2.9 event_button1 . . . . .	208

29.2.2.10 event_button2 . . . . .	209
29.2.2.11 event_button3 . . . . .	209
29.2.2.12 event_buttons . . . . .	209
29.2.2.13 event_clicks . . . . .	209
29.2.2.14 event_clicks . . . . .	209
29.2.2.15 event_ctrl . . . . .	210
29.2.2.16 event_dx . . . . .	210
29.2.2.17 event_dy . . . . .	210
29.2.2.18 event_inside . . . . .	210
29.2.2.19 event_inside . . . . .	210
29.2.2.20 event_is_click . . . . .	210
29.2.2.21 event_key . . . . .	210
29.2.2.22 event_key . . . . .	211
29.2.2.23 event_length . . . . .	211
29.2.2.24 event_original_key . . . . .	212
29.2.2.25 event_shift . . . . .	212
29.2.2.26 event_state . . . . .	212
29.2.2.27 event_text . . . . .	213
29.2.2.28 event_x_root . . . . .	213
29.2.2.29 event_y_root . . . . .	213
29.2.2.30 focus . . . . .	213
29.2.2.31 focus . . . . .	213
29.2.2.32 get_key . . . . .	214
29.2.2.33 get_mouse . . . . .	214
29.2.2.34 handle . . . . .	214
29.2.2.35 pushed . . . . .	214
29.2.2.36 pushed . . . . .	214
29.2.2.37 test_shortcut . . . . .	215
29.3 Selection & Clipboard functions . . . . .	216
29.3.1 Detailed Description . . . . .	216
29.3.2 Function Documentation . . . . .	216
29.3.2.1 copy . . . . .	216
29.3.2.2 dnd . . . . .	216
29.3.2.3 paste . . . . .	217
29.3.2.4 paste . . . . .	217
29.3.2.5 selection . . . . .	217

29.3.2.6 selection_owner . . . . .	217
29.3.2.7 selection_owner . . . . .	218
29.4 Screen functions . . . . .	219
29.4.1 Detailed Description . . . . .	219
29.4.2 Function Documentation . . . . .	219
29.4.2.1 h . . . . .	219
29.4.2.2 screen_xywh . . . . .	219
29.4.2.3 screen_xywh . . . . .	220
29.4.2.4 screen_xywh . . . . .	220
29.4.2.5 w . . . . .	220
29.4.2.6 x . . . . .	220
29.4.2.7 y . . . . .	221
29.5 Color & Font functions . . . . .	222
29.5.1 Detailed Description . . . . .	222
29.5.2 Function Documentation . . . . .	223
29.5.2.1 free_color . . . . .	223
29.5.2.2 get_color . . . . .	223
29.5.2.3 get_font . . . . .	223
29.5.2.4 get_font_name . . . . .	223
29.5.2.5 get_font_sizes . . . . .	223
29.5.2.6 set_color . . . . .	224
29.5.2.7 set_color . . . . .	224
29.5.2.8 set_font . . . . .	224
29.5.2.9 set_font . . . . .	224
29.5.2.10 set_fonts . . . . .	224
29.6 Multithreading support functions . . . . .	225
29.6.1 Detailed Description . . . . .	225
29.6.2 Function Documentation . . . . .	225
29.6.2.1 awake . . . . .	225
29.6.2.2 awake . . . . .	225
29.6.2.3 lock . . . . .	226
29.6.2.4 thread_message . . . . .	226
29.6.2.5 unlock . . . . .	226
29.7 Safe widget deletion support functions . . . . .	227
29.7.1 Detailed Description . . . . .	227
29.7.2 Function Documentation . . . . .	227

29.7.2.1	delete_widget . . . . .	227
29.7.2.2	do_widget_deletion . . . . .	227
29.7.2.3	watch_widget_pointer . . . . .	227
29.8	Cairo support functions and classes . . . . .	229
29.8.1	Function Documentation . . . . .	229
29.8.1.1	cairo_autolink_context . . . . .	229
29.8.1.2	cairo_autolink_context . . . . .	230
29.8.1.3	cairo_cc . . . . .	230
29.8.1.4	cairo_cc . . . . .	230
29.8.1.5	cairo_make_current . . . . .	230
29.9	Common Dialogs classes and functions . . . . .	231
29.9.1	Function Documentation . . . . .	232
29.9.1.1	fl_alert . . . . .	232
29.9.1.2	fl_ask . . . . .	232
29.9.1.3	fl_choice . . . . .	233
29.9.1.4	fl_color_chooser . . . . .	233
29.9.1.5	fl_color_chooser . . . . .	234
29.9.1.6	fl_dir_chooser . . . . .	234
29.9.1.7	fl_file_chooser . . . . .	235
29.9.1.8	fl_file_chooser_callback . . . . .	236
29.9.1.9	fl_file_chooser_callback . . . . .	236
29.9.1.10	fl_file_chooser_ok_label . . . . .	236
29.9.1.11	fl_file_chooser_ok_label . . . . .	236
29.9.1.12	fl_input . . . . .	236
29.9.1.13	fl_message . . . . .	236
29.9.1.14	fl_password . . . . .	237
29.9.2	Variable Documentation . . . . .	237
29.9.2.1	error . . . . .	237
29.9.2.2	fatal . . . . .	237
29.9.2.3	warning . . . . .	237
<b>30</b>	<b>Class Documentation</b> . . . . .	<b>239</b>
30.1	Fl Class Reference . . . . .	239
30.1.1	Detailed Description . . . . .	249
30.1.2	Member Function Documentation . . . . .	249
30.1.2.1	add_awake_handler_ . . . . .	249
30.1.2.2	add_check . . . . .	249

30.1.2.3 add_fd . . . . .	250
30.1.2.4 add_idle . . . . .	250
30.1.2.5 add_timeout . . . . .	250
30.1.2.6 arg . . . . .	251
30.1.2.7 args . . . . .	251
30.1.2.8 background . . . . .	252
30.1.2.9 background2 . . . . .	253
30.1.2.10 box_dh . . . . .	253
30.1.2.11 box_dw . . . . .	253
30.1.2.12 box_dx . . . . .	253
30.1.2.13 box_dy . . . . .	254
30.1.2.14 check . . . . .	254
30.1.2.15 damage . . . . .	254
30.1.2.16 display . . . . .	255
30.1.2.17 dnd_text_ops . . . . .	255
30.1.2.18 dnd_text_ops . . . . .	255
30.1.2.19 draw_box_active . . . . .	255
30.1.2.20 flush . . . . .	255
30.1.2.21 foreground . . . . .	255
30.1.2.22 get_awake_handler_ . . . . .	255
30.1.2.23 get_boxtyle . . . . .	256
30.1.2.24 get_system_colors . . . . .	256
30.1.2.25 gl_visual . . . . .	256
30.1.2.26 own_colormap . . . . .	256
30.1.2.27 ready . . . . .	256
30.1.2.28 release . . . . .	257
30.1.2.29 reload_scheme . . . . .	257
30.1.2.30 remove_check . . . . .	257
30.1.2.31 remove_fd . . . . .	257
30.1.2.32 remove_fd . . . . .	257
30.1.2.33 remove_timeout . . . . .	257
30.1.2.34 repeat_timeout . . . . .	258
30.1.2.35 run . . . . .	258
30.1.2.36 scheme . . . . .	258
30.1.2.37 set_boxtyle . . . . .	258
30.1.2.38 set_boxtyle . . . . .	258

30.1.2.39	set_idle . . . . .	259
30.1.2.40	set_labeltype . . . . .	259
30.1.2.41	set_labeltype . . . . .	259
30.1.2.42	version . . . . .	259
30.1.2.43	visible_focus . . . . .	259
30.1.2.44	visible_focus . . . . .	259
30.1.2.45	visual . . . . .	259
30.1.2.46	wait . . . . .	260
30.1.3	Member Data Documentation . . . . .	260
30.1.3.1	help . . . . .	260
30.1.3.2	idle . . . . .	261
30.2	Fl_Adjuster Class Reference . . . . .	262
30.2.1	Detailed Description . . . . .	262
30.2.2	Constructor & Destructor Documentation . . . . .	263
30.2.2.1	Fl_Adjuster . . . . .	263
30.2.3	Member Function Documentation . . . . .	263
30.2.3.1	draw . . . . .	263
30.2.3.2	handle . . . . .	263
30.2.3.3	soft . . . . .	264
30.2.3.4	soft . . . . .	264
30.3	Fl_Bitmap Class Reference . . . . .	265
30.3.1	Detailed Description . . . . .	266
30.3.2	Constructor & Destructor Documentation . . . . .	266
30.3.2.1	Fl_Bitmap . . . . .	266
30.3.2.2	Fl_Bitmap . . . . .	266
30.3.3	Member Function Documentation . . . . .	266
30.3.3.1	copy . . . . .	266
30.3.3.2	copy . . . . .	266
30.3.3.3	draw . . . . .	267
30.3.3.4	draw . . . . .	267
30.3.3.5	label . . . . .	267
30.3.3.6	label . . . . .	267
30.3.3.7	uncache . . . . .	267
30.4	Fl_BMP_Image Class Reference . . . . .	269
30.4.1	Detailed Description . . . . .	269
30.4.2	Constructor & Destructor Documentation . . . . .	269

30.4.2.1	FL_BMP_Image	269
30.5	FL_Box Class Reference	270
30.5.1	Detailed Description	270
30.5.2	Constructor & Destructor Documentation	270
30.5.2.1	FL_Box	270
30.5.3	Member Function Documentation	271
30.5.3.1	draw	271
30.5.3.2	handle	271
30.6	FL_Browser Class Reference	272
30.6.1	Detailed Description	276
30.6.2	Constructor & Destructor Documentation	276
30.6.2.1	FL_Browser	276
30.6.2.2	~FL_Browser	276
30.6.3	Member Function Documentation	276
30.6.3.1	_remove	276
30.6.3.2	add	277
30.6.3.3	bottomline	277
30.6.3.4	column_char	277
30.6.3.5	column_char	277
30.6.3.6	column_widths	277
30.6.3.7	column_widths	277
30.6.3.8	data	277
30.6.3.9	format_char	278
30.6.3.10	format_char	278
30.6.3.11	full_height	279
30.6.3.12	hide	279
30.6.3.13	hide	279
30.6.3.14	incr_height	279
30.6.3.15	insert	279
30.6.3.16	insert	280
30.6.3.17	item_first	280
30.6.3.18	item_next	280
30.6.3.19	item_prev	280
30.6.3.20	item_select	280
30.6.3.21	item_selected	280
30.6.3.22	item_width	280

30.6.3.23	lineposition	281
30.6.3.24	load	281
30.6.3.25	make_visible	281
30.6.3.26	middleline	281
30.6.3.27	replace	281
30.6.3.28	select	281
30.6.3.29	selected	282
30.6.3.30	show	282
30.6.3.31	show	282
30.6.3.32	size	282
30.6.3.33	size	282
30.6.3.34	swap	283
30.6.3.35	text	283
30.6.3.36	topline	283
30.6.3.37	topline	283
30.6.3.38	value	283
30.6.3.39	value	283
30.7	Fl_Browser_ Class Reference	284
30.7.1	Detailed Description	288
30.7.2	Constructor & Destructor Documentation	288
30.7.2.1	Fl_Browser_	288
30.7.3	Member Function Documentation	288
30.7.3.1	deleting	288
30.7.3.2	deselect	288
30.7.3.3	display	288
30.7.3.4	draw	289
30.7.3.5	find_item	289
30.7.3.6	full_height	289
30.7.3.7	full_width	289
30.7.3.8	handle	289
30.7.3.9	has_scrollbar	290
30.7.3.10	incr_height	290
30.7.3.11	inserting	290
30.7.3.12	item_first	290
30.7.3.13	item_height	290
30.7.3.14	item_next	291

30.7.3.15 item_prev . . . . .	291
30.7.3.16 item_quick_height . . . . .	291
30.7.3.17 item_select . . . . .	291
30.7.3.18 item_selected . . . . .	291
30.7.3.19 item_width . . . . .	291
30.7.3.20 new_list . . . . .	292
30.7.3.21 redraw_lines . . . . .	292
30.7.3.22 replacing . . . . .	292
30.7.3.23 resize . . . . .	292
30.7.3.24 scrollbar_left . . . . .	292
30.7.3.25 scrollbar_right . . . . .	292
30.7.3.26 select . . . . .	292
30.7.3.27 select_only . . . . .	293
30.7.3.28 selection . . . . .	293
30.7.3.29 top . . . . .	293
30.7.4 Member Data Documentation . . . . .	293
30.7.4.1 scrollbar . . . . .	293
30.8 Fl_Button Class Reference . . . . .	294
30.8.1 Detailed Description . . . . .	295
30.8.2 Constructor & Destructor Documentation . . . . .	296
30.8.2.1 Fl_Button . . . . .	296
30.8.3 Member Function Documentation . . . . .	296
30.8.3.1 clear . . . . .	296
30.8.3.2 down_box . . . . .	296
30.8.3.3 down_box . . . . .	296
30.8.3.4 draw . . . . .	296
30.8.3.5 handle . . . . .	297
30.8.3.6 set . . . . .	297
30.8.3.7 shortcut . . . . .	298
30.8.3.8 shortcut . . . . .	298
30.8.3.9 value . . . . .	298
30.9 Fl_Cairo_State Class Reference . . . . .	299
30.9.1 Detailed Description . . . . .	299
30.10 Fl_Cairo_Window Class Reference . . . . .	300
30.10.1 Detailed Description . . . . .	300
30.11 Fl_Chart Class Reference . . . . .	302

---

30.11.1 Detailed Description . . . . .	303
30.11.2 Constructor & Destructor Documentation . . . . .	304
30.11.2.1 Fl_Chart . . . . .	304
30.11.3 Member Function Documentation . . . . .	304
30.11.3.1 add . . . . .	304
30.11.3.2 autosize . . . . .	305
30.11.3.3 autosize . . . . .	305
30.11.3.4 bounds . . . . .	305
30.11.3.5 bounds . . . . .	305
30.11.3.6 draw . . . . .	305
30.11.3.7 insert . . . . .	306
30.11.3.8 maxsize . . . . .	306
30.11.3.9 replace . . . . .	306
30.11.3.10 size . . . . .	306
30.11.3.11 textcolor . . . . .	307
30.11.3.12 textfont . . . . .	307
30.11.3.13 textszie . . . . .	307
30.12 FL_CHART_ENTRY Struct Reference . . . . .	308
30.12.1 Detailed Description . . . . .	308
30.12.2 Member Data Documentation . . . . .	308
30.12.2.1 col . . . . .	308
30.12.2.2 str . . . . .	308
30.12.2.3 val . . . . .	308
30.13 Fl_Check_Browser Class Reference . . . . .	309
30.13.1 Detailed Description . . . . .	310
30.13.2 Constructor & Destructor Documentation . . . . .	310
30.13.2.1 Fl_Check_Browser . . . . .	310
30.13.2.2 ~Fl_Check_Browser . . . . .	310
30.13.3 Member Function Documentation . . . . .	311
30.13.3.1 add . . . . .	311
30.13.3.2 check_all . . . . .	311
30.13.3.3 check_none . . . . .	311
30.13.3.4 checked . . . . .	311
30.13.3.5 checked . . . . .	311
30.13.3.6 clear . . . . .	311
30.13.3.7 handle . . . . .	311

30.13.3.8 <code>nchecked</code>	311
30.13.3.9 <code>nitems</code>	312
30.13.3.10 <code>remove</code>	312
30.13.3.11 <code>set_checked</code>	312
30.13.3.12 <code>text</code>	312
30.13.3.13 <code>value</code>	312
30.14 <code>Fl_Check_Button</code> Class Reference	313
30.14.1 Detailed Description	313
30.14.2 Constructor & Destructor Documentation	314
30.14.2.1 <code>Fl_Check_Button</code>	314
30.15 <code>Fl_Choice</code> Class Reference	315
30.15.1 Detailed Description	315
30.15.2 Constructor & Destructor Documentation	316
30.15.2.1 <code>Fl_Choice</code>	316
30.15.3 Member Function Documentation	317
30.15.3.1 <code>draw</code>	317
30.15.3.2 <code>handle</code>	317
30.15.3.3 <code>value</code>	318
30.15.3.4 <code>value</code>	318
30.15.3.5 <code>value</code>	318
30.16 <code>Fl_Clock</code> Class Reference	320
30.16.1 Detailed Description	320
30.16.2 Constructor & Destructor Documentation	321
30.16.2.1 <code>Fl_Clock</code>	321
30.16.2.2 <code>Fl_Clock</code>	321
30.16.3 Member Function Documentation	322
30.16.3.1 <code>handle</code>	322
30.16.3.2 <code>update</code>	322
30.17 <code>Fl_Clock_Output</code> Class Reference	323
30.17.1 Detailed Description	324
30.17.2 Constructor & Destructor Documentation	324
30.17.2.1 <code>Fl_Clock_Output</code>	324
30.17.3 Member Function Documentation	325
30.17.3.1 <code>draw</code>	325
30.17.3.2 <code>hour</code>	325
30.17.3.3 <code>minute</code>	325

30.17.3.4 second . . . . .	325
30.17.3.5 value . . . . .	325
30.17.3.6 value . . . . .	326
30.17.3.7 value . . . . .	326
30.18 Fl_Color_Chooser Class Reference . . . . .	327
30.18.1 Detailed Description . . . . .	328
30.18.2 Constructor & Destructor Documentation . . . . .	329
30.18.2.1 Fl_Color_Chooser . . . . .	329
30.18.3 Member Function Documentation . . . . .	329
30.18.3.1 b . . . . .	329
30.18.3.2 g . . . . .	329
30.18.3.3 hsv . . . . .	329
30.18.3.4 hsv2rgb . . . . .	330
30.18.3.5 hue . . . . .	330
30.18.3.6 r . . . . .	330
30.18.3.7 rgb . . . . .	330
30.18.3.8 rgb2hsv . . . . .	330
30.18.3.9 saturation . . . . .	331
30.18.3.10 value . . . . .	331
30.19 Fl_Counter Class Reference . . . . .	332
30.19.1 Detailed Description . . . . .	333
30.19.2 Constructor & Destructor Documentation . . . . .	334
30.19.2.1 Fl_Counter . . . . .	334
30.19.3 Member Function Documentation . . . . .	334
30.19.3.1 draw . . . . .	334
30.19.3.2 handle . . . . .	334
30.19.3.3 lstep . . . . .	335
30.19.3.4 step . . . . .	335
30.19.3.5 step . . . . .	335
30.20 Fl_Dial Class Reference . . . . .	336
30.20.1 Detailed Description . . . . .	337
30.20.2 Constructor & Destructor Documentation . . . . .	337
30.20.2.1 Fl_Dial . . . . .	337
30.20.3 Member Function Documentation . . . . .	337
30.20.3.1 angle1 . . . . .	337
30.20.3.2 draw . . . . .	338

---

30.20.3.3 handle . . . . .	338
30.21 Fl_Double_Window Class Reference . . . . .	339
30.21.1 Detailed Description . . . . .	340
30.21.2 Constructor & Destructor Documentation . . . . .	340
30.21.2.1 ~Fl_Double_Window . . . . .	340
30.21.3 Member Function Documentation . . . . .	340
30.21.3.1 flush . . . . .	340
30.21.3.2 hide . . . . .	341
30.21.3.3 resize . . . . .	341
30.21.3.4 show . . . . .	341
30.22 Fl_End Class Reference . . . . .	342
30.22.1 Detailed Description . . . . .	342
30.23 Fl_File_Browser Class Reference . . . . .	343
30.23.1 Detailed Description . . . . .	344
30.23.2 Constructor & Destructor Documentation . . . . .	344
30.23.2.1 Fl_File_Browser . . . . .	344
30.23.3 Member Function Documentation . . . . .	344
30.23.3.1 filetype . . . . .	344
30.23.3.2 filetype . . . . .	344
30.23.3.3 filter . . . . .	344
30.23.3.4 filter . . . . .	344
30.23.3.5 iconsize . . . . .	345
30.23.3.6 iconsize . . . . .	345
30.23.3.7 load . . . . .	345
30.24 Fl_File_Chooser Class Reference . . . . .	346
30.24.1 Detailed Description . . . . .	350
30.24.2 Constructor & Destructor Documentation . . . . .	351
30.24.2.1 Fl_File_Chooser . . . . .	351
30.24.2.2 ~Fl_File_Chooser . . . . .	351
30.24.3 Member Function Documentation . . . . .	352
30.24.3.1 add_extra . . . . .	352
30.24.3.2 color . . . . .	352
30.24.3.3 color . . . . .	352
30.24.3.4 count . . . . .	352
30.24.3.5 directory . . . . .	352
30.24.3.6 directory . . . . .	352

30.24.3.7 filter . . . . .	352
30.24.3.8 filter_value . . . . .	353
30.24.3.9 filter_value . . . . .	353
30.24.3.10 hide . . . . .	353
30.24.3.11 ico_size . . . . .	353
30.24.3.12 icon_size . . . . .	353
30.24.3.13 label . . . . .	353
30.24.3.14 label . . . . .	353
30.24.3.15 preview . . . . .	354
30.24.3.16 preview . . . . .	354
30.24.3.17 rescan . . . . .	354
30.24.3.18 show . . . . .	354
30.24.3.19 text_color . . . . .	354
30.24.3.20 text_color . . . . .	354
30.24.3.21 text_font . . . . .	354
30.24.3.22 text_font . . . . .	355
30.24.3.23 text_size . . . . .	355
30.24.3.24 text_size . . . . .	355
30.24.3.25 type . . . . .	355
30.24.3.26 type . . . . .	355
30.24.3.27 value . . . . .	355
30.24.3.28 visible . . . . .	356
30.25 FL_File_Icon Class Reference . . . . .	357
30.25.1 Detailed Description . . . . .	358
30.25.2 Constructor & Destructor Documentation . . . . .	358
30.25.2.1 FL_File_Icon . . . . .	358
30.25.3 Member Function Documentation . . . . .	359
30.25.3.1 add . . . . .	359
30.25.3.2 add_color . . . . .	359
30.25.3.3 add_vertex . . . . .	359
30.25.3.4 add_vertex . . . . .	359
30.25.3.5 clear . . . . .	360
30.25.3.6 draw . . . . .	360
30.25.3.7 find . . . . .	360
30.25.3.8 first . . . . .	360
30.25.3.9 label . . . . .	360

30.25.3.10	labeltype	361
30.25.3.11	load	361
30.25.3.12	load_fti	361
30.25.3.13	load_image	361
30.25.3.14	load_system_icons	362
30.25.3.15	next	362
30.25.3.16	pattern	362
30.25.3.17	size	362
30.25.3.18	type	362
30.25.3.19	value	362
30.26	Fl_File_Input Class Reference	363
30.26.1	Detailed Description	364
30.26.2	Constructor & Destructor Documentation	364
30.26.2.1	Fl_File_Input	364
30.26.3	Member Function Documentation	364
30.26.3.1	down_box	364
30.26.3.2	down_box	364
30.26.3.3	errorcolor	364
30.26.3.4	handle	365
30.26.3.5	value	365
30.26.3.6	value	365
30.27	Fl_Fill_Dial Class Reference	366
30.27.1	Detailed Description	366
30.27.2	Constructor & Destructor Documentation	366
30.27.2.1	Fl_Fill_Dial	366
30.28	Fl_Fill_Slider Class Reference	367
30.28.1	Detailed Description	367
30.28.2	Constructor & Destructor Documentation	367
30.28.2.1	Fl_Fill_Slider	367
30.29	Fl_Float_Input Class Reference	368
30.29.1	Detailed Description	368
30.29.2	Constructor & Destructor Documentation	368
30.29.2.1	Fl_Float_Input	368
30.30	Fl_Font_Descriptor Class Reference	369
30.30.1	Detailed Description	369
30.31	Fl_FormsBitmap Class Reference	370

30.31.1 Detailed Description . . . . .	370
30.31.2 Member Function Documentation . . . . .	370
30.31.2.1 bitmap . . . . .	370
30.31.2.2 bitmap . . . . .	370
30.31.2.3 draw . . . . .	371
30.31.2.4 set . . . . .	371
30.32 Fl_FormsPixmap Class Reference . . . . .	372
30.32.1 Detailed Description . . . . .	372
30.32.2 Constructor & Destructor Documentation . . . . .	372
30.32.2.1 Fl_FormsPixmap . . . . .	372
30.32.3 Member Function Documentation . . . . .	373
30.32.3.1 draw . . . . .	373
30.32.3.2 Pixmap . . . . .	373
30.32.3.3 Pixmap . . . . .	373
30.32.3.4 set . . . . .	373
30.33 Fl_Free Class Reference . . . . .	374
30.33.1 Detailed Description . . . . .	374
30.33.2 Constructor & Destructor Documentation . . . . .	375
30.33.2.1 Fl_Free . . . . .	375
30.33.3 Member Function Documentation . . . . .	375
30.33.3.1 draw . . . . .	375
30.33.3.2 handle . . . . .	376
30.34 Fl_GIF_Image Class Reference . . . . .	377
30.34.1 Detailed Description . . . . .	377
30.34.2 Constructor & Destructor Documentation . . . . .	377
30.34.2.1 Fl_GIF_Image . . . . .	377
30.35 Fl_Gl_Window Class Reference . . . . .	378
30.35.1 Detailed Description . . . . .	380
30.35.2 Constructor & Destructor Documentation . . . . .	380
30.35.2.1 Fl_Gl_Window . . . . .	380
30.35.2.2 Fl_Gl_Window . . . . .	380
30.35.3 Member Function Documentation . . . . .	381
30.35.3.1 can_do . . . . .	381
30.35.3.2 can_do . . . . .	381
30.35.3.3 can_do . . . . .	381
30.35.3.4 can_do_overlay . . . . .	381

30.35.3.5 context . . . . .	381
30.35.3.6 context_valid . . . . .	381
30.35.3.7 draw . . . . .	381
30.35.3.8 flush . . . . .	382
30.35.3.9 make_current . . . . .	382
30.35.3.10make_overlay_current . . . . .	382
30.35.3.11mode . . . . .	382
30.35.3.12ortho . . . . .	383
30.35.3.13redraw_overlay . . . . .	383
30.35.3.14resize . . . . .	383
30.35.3.15show . . . . .	384
30.35.3.16swap_buffers . . . . .	384
30.35.3.17valid . . . . .	384
30.36Fl_Glut_Bitmap_Font Struct Reference . . . . .	386
30.36.1 Detailed Description . . . . .	386
30.37Fl_Glut_Window Class Reference . . . . .	387
30.37.1 Detailed Description . . . . .	388
30.37.2 Constructor & Destructor Documentation . . . . .	388
30.37.2.1 Fl_Glut_Window . . . . .	388
30.37.2.2 ~Fl_Glut_Window . . . . .	388
30.37.3 Member Function Documentation . . . . .	388
30.37.3.1 draw . . . . .	388
30.37.3.2 draw_overlay . . . . .	388
30.37.3.3 handle . . . . .	389
30.37.3.4 make_current . . . . .	389
30.38Fl_Group Class Reference . . . . .	391
30.38.1 Detailed Description . . . . .	394
30.38.2 Constructor & Destructor Documentation . . . . .	394
30.38.2.1 Fl_Group . . . . .	394
30.38.2.2 ~Fl_Group . . . . .	394
30.38.3 Member Function Documentation . . . . .	394
30.38.3.1 array . . . . .	394
30.38.3.2 begin . . . . .	394
30.38.3.3 child . . . . .	395
30.38.3.4 clear . . . . .	395
30.38.3.5 clip_children . . . . .	395

30.38.3.6 current . . . . .	395
30.38.3.7 draw . . . . .	395
30.38.3.8 draw_child . . . . .	396
30.38.3.9 draw_children . . . . .	396
30.38.3.10 draw_outside_label . . . . .	396
30.38.3.11 lend . . . . .	396
30.38.3.12 find . . . . .	396
30.38.3.13 focus . . . . .	397
30.38.3.14 handle . . . . .	397
30.38.3.15 init_sizes . . . . .	398
30.38.3.16 insert . . . . .	398
30.38.3.17 insert . . . . .	398
30.38.3.18 remove . . . . .	398
30.38.3.19 remove . . . . .	398
30.38.3.20 resizable . . . . .	399
30.38.3.21 resize . . . . .	400
30.38.3.22 sizes . . . . .	400
30.38.3.23 update_child . . . . .	400
30.39 Fl_Help_Dialog Class Reference . . . . .	402
30.39.1 Detailed Description . . . . .	403
30.39.2 Constructor & Destructor Documentation . . . . .	403
30.39.2.1 Fl_Help_Dialog . . . . .	403
30.39.3 Member Function Documentation . . . . .	404
30.39.3.1 h . . . . .	404
30.39.3.2 hide . . . . .	404
30.39.3.3 load . . . . .	404
30.39.3.4 position . . . . .	404
30.39.3.5 resize . . . . .	404
30.39.3.6 show . . . . .	404
30.39.3.7 textSize . . . . .	404
30.39.3.8 textSize . . . . .	404
30.39.3.9 value . . . . .	405
30.39.3.10 value . . . . .	405
30.39.3.11 visible . . . . .	405
30.39.3.12 w . . . . .	405
30.39.3.13 x . . . . .	405

30.39.3.14y . . . . .	405
30.40Fl_Help_Link Struct Reference . . . . .	406
30.40.1 Detailed Description . . . . .	406
30.41Fl_Help_Target Struct Reference . . . . .	407
30.41.1 Detailed Description . . . . .	407
30.42Fl_Help_View Class Reference . . . . .	408
30.42.1 Detailed Description . . . . .	410
30.42.2 Constructor & Destructor Documentation . . . . .	410
30.42.2.1 ~Fl_Help_View . . . . .	410
30.42.3 Member Function Documentation . . . . .	410
30.42.3.1 clear_selection . . . . .	410
30.42.3.2 directory . . . . .	410
30.42.3.3 filename . . . . .	410
30.42.3.4 leftline . . . . .	410
30.42.3.5 leftline . . . . .	410
30.42.3.6 link . . . . .	410
30.42.3.7 load . . . . .	411
30.42.3.8 resize . . . . .	411
30.42.3.9 select_all . . . . .	411
30.42.3.10size . . . . .	411
30.42.3.11textcolor . . . . .	411
30.42.3.12textcolor . . . . .	412
30.42.3.13textfont . . . . .	412
30.42.3.14textfont . . . . .	412
30.42.3.15textsize . . . . .	412
30.42.3.16textsize . . . . .	412
30.42.3.17title . . . . .	412
30.42.3.18topline . . . . .	412
30.42.3.19topline . . . . .	412
30.42.3.20value . . . . .	412
30.42.3.21value . . . . .	412
30.43Fl_Hold_Browser Class Reference . . . . .	414
30.43.1 Detailed Description . . . . .	414
30.43.2 Constructor & Destructor Documentation . . . . .	414
30.43.2.1 Fl_Hold_Browser . . . . .	414
30.44Fl_Image Class Reference . . . . .	415

---

30.44.1 Detailed Description . . . . .	417
30.44.2 Constructor & Destructor Documentation . . . . .	417
30.44.2.1 <code>FL_Image</code> . . . . .	417
30.44.3 Member Function Documentation . . . . .	417
30.44.3.1 <code>color_average</code> . . . . .	417
30.44.3.2 <code>copy</code> . . . . .	417
30.44.3.3 <code>copy</code> . . . . .	417
30.44.3.4 <code>count</code> . . . . .	418
30.44.3.5 <code>d</code> . . . . .	418
30.44.3.6 <code>d</code> . . . . .	418
30.44.3.7 <code>data</code> . . . . .	418
30.44.3.8 <code>desaturate</code> . . . . .	418
30.44.3.9 <code>draw</code> . . . . .	419
30.44.3.10 <code>draw</code> . . . . .	419
30.44.3.11 <code>draw_empty</code> . . . . .	419
30.44.3.12 <code>h</code> . . . . .	419
30.44.3.13 <code>inactive</code> . . . . .	419
30.44.3.14 <code>label</code> . . . . .	419
30.44.3.15 <code>label</code> . . . . .	420
30.44.3.16 <code>d</code> . . . . .	420
30.44.3.17 <code>uncache</code> . . . . .	420
30.44.3.18 <code>w</code> . . . . .	420
30.45 <code>FL_Input</code> Class Reference . . . . .	421
30.45.1 Detailed Description . . . . .	421
30.45.2 Constructor & Destructor Documentation . . . . .	423
30.45.2.1 <code>FL_Input</code> . . . . .	423
30.45.3 Member Function Documentation . . . . .	423
30.45.3.1 <code>draw</code> . . . . .	423
30.45.3.2 <code>handle</code> . . . . .	423
30.46 <code>FL_Input_</code> Class Reference . . . . .	425
30.46.1 Detailed Description . . . . .	428
30.46.2 Constructor & Destructor Documentation . . . . .	428
30.46.2.1 <code>FL_Input_</code> . . . . .	428
30.46.3 Member Function Documentation . . . . .	428
30.46.3.1 <code>copy</code> . . . . .	428
30.46.3.2 <code>copy_cuts</code> . . . . .	429

---

30.46.3.3 cursor_color . . . . .	429
30.46.3.4 cursor_color . . . . .	429
30.46.3.5 cut . . . . .	429
30.46.3.6 drawtext . . . . .	429
30.46.3.7 index . . . . .	430
30.46.3.8 input_type . . . . .	430
30.46.3.9 input_type . . . . .	430
30.46.3.10 insert . . . . .	430
30.46.3.11 lmark . . . . .	430
30.46.3.12 mark . . . . .	430
30.46.3.13 maximum_size . . . . .	430
30.46.3.14 maximum_size . . . . .	430
30.46.3.15 position . . . . .	431
30.46.3.16 readonly . . . . .	431
30.46.3.17 readonly . . . . .	431
30.46.3.18 replace . . . . .	431
30.46.3.19 resize . . . . .	431
30.46.3.20 shortcut . . . . .	432
30.46.3.21 lsize . . . . .	432
30.46.3.22 size . . . . .	432
30.46.3.23 static_value . . . . .	433
30.46.3.24 textcolor . . . . .	433
30.46.3.25 textcolor . . . . .	433
30.46.3.26 textfont . . . . .	433
30.46.3.27 textfont . . . . .	433
30.46.3.28 textSize . . . . .	433
30.46.3.29 textSize . . . . .	433
30.46.3.30 undo . . . . .	433
30.46.3.31 lup_down_position . . . . .	434
30.46.3.32 value . . . . .	434
30.46.3.33 wrap . . . . .	434
30.46.3.34 wrap . . . . .	434
30.47 Fl_Input_Choice Class Reference . . . . .	435
30.47.1 Detailed Description . . . . .	436
30.47.2 Constructor & Destructor Documentation . . . . .	437
30.47.2.1 Fl_Input_Choice . . . . .	437

---

30.47.3 Member Function Documentation . . . . .	437
30.47.3.1 add . . . . .	437
30.47.3.2 changed . . . . .	437
30.47.3.3 clear . . . . .	437
30.47.3.4 clear_changed . . . . .	437
30.47.3.5 input . . . . .	438
30.47.3.6 menu . . . . .	438
30.47.3.7 menu . . . . .	438
30.47.3.8 menubutton . . . . .	438
30.47.3.9 resize . . . . .	438
30.47.3.10 set_changed . . . . .	438
30.47.3.11 value . . . . .	439
30.48 Fl_Int_Input Class Reference . . . . .	440
30.48.1 Detailed Description . . . . .	440
30.48.2 Constructor & Destructor Documentation . . . . .	440
30.48.2.1 Fl_Int_Input . . . . .	440
30.49 Fl_JPEG_Image Class Reference . . . . .	441
30.49.1 Detailed Description . . . . .	441
30.49.2 Constructor & Destructor Documentation . . . . .	441
30.49.2.1 Fl_JPEG_Image . . . . .	441
30.50 Fl_Label Struct Reference . . . . .	442
30.50.1 Detailed Description . . . . .	442
30.50.2 Member Function Documentation . . . . .	443
30.50.2.1 draw . . . . .	443
30.50.2.2 measure . . . . .	443
30.50.3 Member Data Documentation . . . . .	443
30.50.3.1 type . . . . .	443
30.51 Fl_Light_Button Class Reference . . . . .	444
30.51.1 Detailed Description . . . . .	444
30.51.2 Constructor & Destructor Documentation . . . . .	445
30.51.2.1 Fl_Light_Button . . . . .	445
30.51.3 Member Function Documentation . . . . .	445
30.51.3.1 draw . . . . .	445
30.51.3.2 handle . . . . .	445
30.52 Fl_Menu_ Class Reference . . . . .	447
30.52.1 Detailed Description . . . . .	449

30.52.2 Constructor & Destructor Documentation . . . . .	450
30.52.2.1 Fl_Menu_ . . . . .	450
30.52.3 Member Function Documentation . . . . .	450
30.52.3.1 add . . . . .	450
30.52.3.2 add . . . . .	450
30.52.3.3 clear . . . . .	451
30.52.3.4 copy . . . . .	451
30.52.3.5 down_box . . . . .	451
30.52.3.6 find_item . . . . .	451
30.52.3.7 global . . . . .	451
30.52.3.8 menu . . . . .	452
30.52.3.9 menu . . . . .	452
30.52.3.10 mode . . . . .	452
30.52.3.11 lmode . . . . .	452
30.52.3.12 mvalue . . . . .	452
30.52.3.13 picked . . . . .	452
30.52.3.14 remove . . . . .	453
30.52.3.15 replace . . . . .	453
30.52.3.16 shortcut . . . . .	453
30.52.3.17 size . . . . .	453
30.52.3.18 &size . . . . .	453
30.52.3.19 test_shortcut . . . . .	454
30.52.3.20 text . . . . .	454
30.52.3.21 ltext . . . . .	454
30.52.3.22 extcolor . . . . .	454
30.52.3.23 textcolor . . . . .	454
30.52.3.24 textfont . . . . .	454
30.52.3.25 textfont . . . . .	454
30.52.3.26 textsize . . . . .	454
30.52.3.27 textsize . . . . .	454
30.52.3.28 value . . . . .	455
30.52.3.29 value . . . . .	455
30.52.3.30 value . . . . .	455
30.53 Fl_Menu_Bar Class Reference . . . . .	456
30.53.1 Detailed Description . . . . .	456
30.53.2 Constructor & Destructor Documentation . . . . .	457

---

30.53.2.1 <code>FL_Menu_Bar</code> . . . . .	457
30.53.3 Member Function Documentation . . . . .	457
30.53.3.1 <code>draw</code> . . . . .	457
30.53.3.2 <code>handle</code> . . . . .	457
30.54 <code>FL_Menu_Button</code> Class Reference . . . . .	459
30.54.1 Detailed Description . . . . .	459
30.54.2 Constructor & Destructor Documentation . . . . .	460
30.54.2.1 <code>FL_Menu_Button</code> . . . . .	460
30.54.3 Member Function Documentation . . . . .	460
30.54.3.1 <code>draw</code> . . . . .	460
30.54.3.2 <code>handle</code> . . . . .	461
30.54.3.3 <code>popup</code> . . . . .	461
30.55 <code>FL_Menu_Item</code> Struct Reference . . . . .	462
30.55.1 Detailed Description . . . . .	466
30.55.2 Member Function Documentation . . . . .	467
30.55.2.1 <code>activate</code> . . . . .	467
30.55.2.2 <code>active</code> . . . . .	468
30.55.2.3 <code>activevisible</code> . . . . .	468
30.55.2.4 <code>add</code> . . . . .	468
30.55.2.5 <code>argument</code> . . . . .	468
30.55.2.6 <code>argument</code> . . . . .	468
30.55.2.7 <code>callback</code> . . . . .	468
30.55.2.8 <code>check</code> . . . . .	468
30.55.2.9 <code>checkbox</code> . . . . .	469
30.55.2.10 <code>checked</code> . . . . .	469
30.55.2.11 <code>clear</code> . . . . .	469
30.55.2.12 <code>deactivate</code> . . . . .	469
30.55.2.13 <code>do_callback</code> . . . . .	469
30.55.2.14 <code>do_callback</code> . . . . .	469
30.55.2.15 <code>do_callback</code> . . . . .	469
30.55.2.16 <code>draw</code> . . . . .	470
30.55.2.17 <code>find_shortcut</code> . . . . .	470
30.55.2.18 <code>first</code> . . . . .	470
30.55.2.19 <code>first</code> . . . . .	470
30.55.2.20 <code>hide</code> . . . . .	470
30.55.2.21 <code>label</code> . . . . .	470

30.55.2.2 <code>labelcolor</code>	470
30.55.2.23 <code>labelfont</code>	471
30.55.2.24 <code>labelfont</code>	471
30.55.2.25 <code>labelsize</code>	471
30.55.2.26 <code>labelsize</code>	471
30.55.2.27 <code>labeltype</code>	471
30.55.2.28 <code>labeltype</code>	471
30.55.2.29 <code>measure</code>	471
30.55.2.30 <code>next</code>	472
30.55.2.31 <code>next</code>	472
30.55.2.32 <code>popup</code>	472
30.55.2.33 <code>popupdown</code>	472
30.55.2.34 <code>radio</code>	473
30.55.2.35 <code>set</code>	473
30.55.2.36 <code>setonly</code>	473
30.55.2.37 <code>shortcut</code>	473
30.55.2.38 <code>shortcut</code>	473
30.55.2.39 <code>show</code>	473
30.55.2.40 <code>submenu</code>	473
30.55.2.41 <code>test_shortcut</code>	474
30.55.2.42 <code>uncheck</code>	474
30.55.2.43 <code>value</code>	474
30.55.2.44 <code>visible</code>	474
<b>30.56<code>Fl_Menu_Window</code> Class Reference</b>	475
<b>30.56.1 Detailed Description</b>	476
<b>30.56.2 Constructor &amp; Destructor Documentation</b>	476
30.56.2.1 <code>~Fl_Menu_Window</code>	476
30.56.2.2 <code>Fl_Menu_Window</code>	476
30.56.2.3 <code>Fl_Menu_Window</code>	476
<b>30.56.3 Member Function Documentation</b>	476
30.56.3.1 <code>clear_overlay</code>	476
30.56.3.2 <code>flush</code>	476
30.56.3.3 <code>hide</code>	476
30.56.3.4 <code>set_overlay</code>	477
30.56.3.5 <code>show</code>	477
<b>30.57<code>Fl_Multi_Browser</code> Class Reference</b>	478

---

30.57.1 Detailed Description . . . . .	478
30.57.2 Constructor & Destructor Documentation . . . . .	478
30.57.2.1 Fl_Multi_Browser . . . . .	478
30.58 Fl_Multiline_Input Class Reference . . . . .	479
30.58.1 Detailed Description . . . . .	479
30.58.2 Constructor & Destructor Documentation . . . . .	479
30.58.2.1 Fl_Multiline_Input . . . . .	479
30.59 Fl_Multiline_Output Class Reference . . . . .	480
30.59.1 Detailed Description . . . . .	480
30.59.2 Constructor & Destructor Documentation . . . . .	480
30.59.2.1 Fl_Multiline_Output . . . . .	480
30.60 Fl_Output Class Reference . . . . .	481
30.60.1 Detailed Description . . . . .	481
30.60.2 Constructor & Destructor Documentation . . . . .	482
30.60.2.1 Fl_Output . . . . .	482
30.61 Fl_Overlay_Window Class Reference . . . . .	483
30.61.1 Detailed Description . . . . .	484
30.61.2 Constructor & Destructor Documentation . . . . .	484
30.61.2.1 Fl_Overlay_Window . . . . .	484
30.61.3 Member Function Documentation . . . . .	484
30.61.3.1 hide . . . . .	484
30.61.3.2 redraw_overlay . . . . .	484
30.61.3.3 resize . . . . .	484
30.61.3.4 show . . . . .	485
30.62 Fl_Pack Class Reference . . . . .	486
30.62.1 Detailed Description . . . . .	486
30.62.2 Constructor & Destructor Documentation . . . . .	487
30.62.2.1 Fl_Pack . . . . .	487
30.62.3 Member Function Documentation . . . . .	487
30.62.3.1 draw . . . . .	487
30.63 Fl_Pixmap Class Reference . . . . .	488
30.63.1 Detailed Description . . . . .	489
30.63.2 Constructor & Destructor Documentation . . . . .	489
30.63.2.1 Fl_Pixmap . . . . .	489
30.63.2.2 Fl_Pixmap . . . . .	489
30.63.2.3 Fl_Pixmap . . . . .	489

30.63.2.4 FL_Pixmap . . . . .	489
30.63.3 Member Function Documentation . . . . .	490
30.63.3.1 color_average . . . . .	490
30.63.3.2 copy . . . . .	490
30.63.3.3 copy . . . . .	490
30.63.3.4 desaturate . . . . .	490
30.63.3.5 draw . . . . .	490
30.63.3.6 draw . . . . .	491
30.63.3.7 label . . . . .	491
30.63.3.8 label . . . . .	491
30.63.3.9 uncache . . . . .	491
30.64 FL_PNG_Image Class Reference . . . . .	492
30.64.1 Detailed Description . . . . .	492
30.64.2 Constructor & Destructor Documentation . . . . .	492
30.64.2.1 FL_PNG_Image . . . . .	492
30.65 FL_PNM_Image Class Reference . . . . .	493
30.65.1 Detailed Description . . . . .	493
30.65.2 Constructor & Destructor Documentation . . . . .	493
30.65.2.1 FL_PNM_Image . . . . .	493
30.66 FL_Positioner Class Reference . . . . .	494
30.66.1 Detailed Description . . . . .	495
30.66.2 Constructor & Destructor Documentation . . . . .	496
30.66.2.1 FL_Positioner . . . . .	496
30.66.3 Member Function Documentation . . . . .	496
30.66.3.1 draw . . . . .	496
30.66.3.2 handle . . . . .	496
30.66.3.3 value . . . . .	497
30.66.3.4 xbounds . . . . .	497
30.66.3.5 xstep . . . . .	497
30.66.3.6 xvalue . . . . .	497
30.66.3.7 xvalue . . . . .	497
30.66.3.8 ybounds . . . . .	497
30.66.3.9 ystep . . . . .	497
30.66.3.10 yvalue . . . . .	497
30.66.3.1 lyvalue . . . . .	497
30.67 FL_Preferences Class Reference . . . . .	498

---

30.67.1 Detailed Description . . . . .	500
30.67.2 Member Enumeration Documentation . . . . .	500
30.67.2.1 Root . . . . .	500
30.67.3 Constructor & Destructor Documentation . . . . .	501
30.67.3.1 Fl_Preferences . . . . .	501
30.67.3.2 Fl_Preferences . . . . .	501
30.67.3.3 Fl_Preferences . . . . .	502
30.67.3.4 Fl_Preferences . . . . .	502
30.67.3.5 ~Fl_Preferences . . . . .	502
30.67.4 Member Function Documentation . . . . .	503
30.67.4.1 deleteEntry . . . . .	503
30.67.4.2 deleteGroup . . . . .	503
30.67.4.3 entries . . . . .	503
30.67.4.4 entry . . . . .	503
30.67.4.5 entryExists . . . . .	504
30.67.4.6 flush . . . . .	504
30.67.4.7 get . . . . .	504
30.67.4.8 get . . . . .	505
30.67.4.9 get . . . . .	505
30.67.4.10get . . . . .	506
30.67.4.11get . . . . .	506
30.67.4.12get . . . . .	506
30.67.4.13get . . . . .	507
30.67.4.14getUserdataPath . . . . .	507
30.67.4.15group . . . . .	507
30.67.4.16groupExists . . . . .	508
30.67.4.17groups . . . . .	508
30.67.4.18&set . . . . .	508
30.67.4.19set . . . . .	509
30.67.4.20set . . . . .	509
30.67.4.21set . . . . .	509
30.67.4.22set . . . . .	510
30.67.4.23set . . . . .	510
30.67.4.24set . . . . .	510
30.67.4.25size . . . . .	511
30.68Fl_Preferences::Entry Struct Reference . . . . .	512

---

30.68.1 Detailed Description . . . . .	512
30.69 FL_Preferences::Name Class Reference . . . . .	513
30.69.1 Detailed Description . . . . .	513
30.69.2 Constructor & Destructor Documentation . . . . .	513
30.69.2.1 Name . . . . .	513
30.69.2.2 Name . . . . .	513
30.70 FL_Progress Class Reference . . . . .	515
30.70.1 Detailed Description . . . . .	515
30.70.2 Constructor & Destructor Documentation . . . . .	516
30.70.2.1 FL_Progress . . . . .	516
30.70.3 Member Function Documentation . . . . .	516
30.70.3.1 draw . . . . .	516
30.70.3.2 maximum . . . . .	516
30.70.3.3 maximum . . . . .	516
30.70.3.4 minimum . . . . .	516
30.70.3.5 minimum . . . . .	516
30.70.3.6 value . . . . .	516
30.70.3.7 value . . . . .	517
30.71 FL_Repeat_Button Class Reference . . . . .	518
30.71.1 Detailed Description . . . . .	518
30.71.2 Constructor & Destructor Documentation . . . . .	518
30.71.2.1 FL_Repeat_Button . . . . .	518
30.71.3 Member Function Documentation . . . . .	518
30.71.3.1 deactivate . . . . .	518
30.71.3.2 handle . . . . .	519
30.72 FL_Return_Button Class Reference . . . . .	520
30.72.1 Detailed Description . . . . .	520
30.72.2 Constructor & Destructor Documentation . . . . .	521
30.72.2.1 FL_Return_Button . . . . .	521
30.72.3 Member Function Documentation . . . . .	521
30.72.3.1 draw . . . . .	521
30.72.3.2 handle . . . . .	521
30.73 FL_RGB_Image Class Reference . . . . .	523
30.73.1 Detailed Description . . . . .	524
30.73.2 Constructor & Destructor Documentation . . . . .	524
30.73.2.1 FL_RGB_Image . . . . .	524

30.73.2.2 ~Fl_RGB_Image . . . . .	524
30.73.3 Member Function Documentation . . . . .	524
30.73.3.1 color_average . . . . .	524
30.73.3.2 copy . . . . .	524
30.73.3.3 copy . . . . .	525
30.73.3.4 desaturate . . . . .	525
30.73.3.5 draw . . . . .	525
30.73.3.6 draw . . . . .	525
30.73.3.7 label . . . . .	526
30.73.3.8 label . . . . .	526
30.73.3.9 uncache . . . . .	526
30.74 Fl_Roller Class Reference . . . . .	527
30.74.1 Detailed Description . . . . .	527
30.74.2 Constructor & Destructor Documentation . . . . .	528
30.74.2.1 Fl_Roller . . . . .	528
30.74.3 Member Function Documentation . . . . .	528
30.74.3.1 draw . . . . .	528
30.74.3.2 handle . . . . .	528
30.75 Fl_Round_Button Class Reference . . . . .	530
30.75.1 Detailed Description . . . . .	530
30.76 Fl_Round_Clock Class Reference . . . . .	532
30.76.1 Detailed Description . . . . .	532
30.76.2 Constructor & Destructor Documentation . . . . .	532
30.76.2.1 Fl_Round_Clock . . . . .	532
30.77 Fl_Scroll Class Reference . . . . .	533
30.77.1 Detailed Description . . . . .	534
30.77.2 Constructor & Destructor Documentation . . . . .	535
30.77.2.1 Fl_Scroll . . . . .	535
30.77.3 Member Function Documentation . . . . .	535
30.77.3.1 clear . . . . .	535
30.77.3.2 draw . . . . .	535
30.77.3.3 handle . . . . .	536
30.77.3.4 resize . . . . .	536
30.77.3.5 scroll_to . . . . .	536
30.77.3.6 xposition . . . . .	537
30.77.3.7 yposition . . . . .	537

30.78	Fl_Scrollbar Class Reference . . . . .	538
30.78.1	Detailed Description . . . . .	539
30.78.2	Constructor & Destructor Documentation . . . . .	539
30.78.2.1	Fl_Scrollbar . . . . .	539
30.78.2.2	~Fl_Scrollbar . . . . .	539
30.78.3	Member Function Documentation . . . . .	539
30.78.3.1	draw . . . . .	539
30.78.3.2	handle . . . . .	540
30.78.3.3	linesize . . . . .	540
30.78.3.4	linesize . . . . .	540
30.78.3.5	value . . . . .	541
30.79	Fl_Secret_Input Class Reference . . . . .	542
30.79.1	Detailed Description . . . . .	542
30.79.2	Constructor & Destructor Documentation . . . . .	542
30.79.2.1	Fl_Secret_Input . . . . .	542
30.80	Fl_Select_Browser Class Reference . . . . .	543
30.80.1	Detailed Description . . . . .	543
30.80.2	Constructor & Destructor Documentation . . . . .	543
30.80.2.1	Fl_Select_Browser . . . . .	543
30.81	Fl_Shared_Image Class Reference . . . . .	544
30.81.1	Detailed Description . . . . .	546
30.81.2	Constructor & Destructor Documentation . . . . .	546
30.81.2.1	Fl_Shared_Image . . . . .	546
30.81.2.2	Fl_Shared_Image . . . . .	546
30.81.2.3	~Fl_Shared_Image . . . . .	546
30.81.3	Member Function Documentation . . . . .	546
30.81.3.1	color_average . . . . .	546
30.81.3.2	copy . . . . .	547
30.81.3.3	copy . . . . .	547
30.81.3.4	desaturate . . . . .	547
30.81.3.5	draw . . . . .	547
30.81.3.6	draw . . . . .	548
30.81.3.7	get . . . . .	548
30.81.3.8	num_images . . . . .	548
30.81.3.9	refcount . . . . .	548
30.81.3.10	release . . . . .	548

---

30.81.3.1 <code>luncache</code>	548
30.82 <code>FL_Simple_Counter</code> Class Reference	549
30.82.1 Detailed Description	549
30.83 <code>FL_Single_Window</code> Class Reference	550
30.83.1 Detailed Description	550
30.83.2 Member Function Documentation	551
30.83.2.1 <code>flush</code>	551
30.83.2.2 <code>make_current</code>	551
30.83.2.3 <code>show</code>	551
30.84 <code>FL_Slider</code> Class Reference	552
30.84.1 Detailed Description	553
30.84.2 Constructor & Destructor Documentation	553
30.84.2.1 <code>Fl_Slider</code>	553
30.84.2.2 <code>Fl_Slider</code>	554
30.84.3 Member Function Documentation	554
30.84.3.1 <code>bounds</code>	554
30.84.3.2 <code>draw</code>	554
30.84.3.3 <code>handle</code>	554
30.84.3.4 <code>scrollvalue</code>	555
30.84.3.5 <code>slider</code>	555
30.84.3.6 <code>slider</code>	555
30.84.3.7 <code>slider_size</code>	555
30.84.3.8 <code>slider_size</code>	555
30.85 <code>FL_Spinner</code> Class Reference	556
30.85.1 Detailed Description	557
30.85.2 Constructor & Destructor Documentation	558
30.85.2.1 <code>Fl_Spinner</code>	558
30.85.3 Member Function Documentation	558
30.85.3.1 <code>format</code>	558
30.85.3.2 <code>format</code>	558
30.85.3.3 <code>handle</code>	558
30.85.3.4 <code>maximum</code>	558
30.85.3.5 <code>maximum</code>	559
30.85.3.6 <code>maxnum</code>	559
30.85.3.7 <code>minimum</code>	559
30.85.3.8 <code>minimum</code>	559

30.85.3.9 <code>minum</code>	559
30.85.3.10 <code>range</code>	559
30.85.3.11 <code>resize</code>	559
30.85.3.12 <code>step</code>	560
30.85.3.13 <code>textcolor</code>	560
30.85.3.14 <code>textcolor</code>	560
30.85.3.15 <code>textfont</code>	560
30.85.3.16 <code>textfont</code>	560
30.85.3.17 <code>textsize</code>	560
30.85.3.18 <code>textsize</code>	560
30.85.3.19 <code>type</code>	560
30.85.3.20 <code>value</code>	561
30.85.3.21 <code>value</code>	561
30.86 <code>FL_Tabs</code> Class Reference	562
30.86.1 Detailed Description	562
30.86.2 Constructor & Destructor Documentation	563
30.86.2.1 <code>FL_Tabs</code>	563
30.86.3 Member Function Documentation	564
30.86.3.1 <code>draw</code>	564
30.86.3.2 <code>handle</code>	564
30.86.3.3 <code>value</code>	565
30.86.3.4 <code>value</code>	565
30.87 <code>FL_Text_Buffer</code> Class Reference	566
30.87.1 Detailed Description	573
30.87.2 Constructor & Destructor Documentation	574
30.87.2.1 <code>FL_Text_Buffer</code>	574
30.87.3 Member Function Documentation	574
30.87.3.1 <code>add_modify_callback</code>	574
30.87.3.2 <code>add_predelete_callback</code>	574
30.87.3.3 <code>append</code>	574
30.87.3.4 <code>appendfile</code>	574
30.87.3.5 <code>character</code>	574
30.87.3.6 <code>character_width</code>	575
30.87.3.7 <code>clear_rectangular</code>	575
30.87.3.8 <code>count_displayed_characters</code>	575
30.87.3.9 <code>count_lines</code>	575

30.87.3.10	expand_character . . . . .	576
30.87.3.11	expand_character . . . . .	576
30.87.3.12	findchar_backward . . . . .	576
30.87.3.13	findchar_forward . . . . .	576
30.87.3.14	findchars_backward . . . . .	576
30.87.3.15	findchars_forward . . . . .	577
30.87.3.16	highlight . . . . .	577
30.87.3.17	highlight . . . . .	577
30.87.3.18	highlight_position . . . . .	577
30.87.3.19	highlight_position . . . . .	577
30.87.3.20	highlight_selection . . . . .	577
30.87.3.21	highlight_text . . . . .	577
30.87.3.22	insert . . . . .	578
30.87.3.23	insert_ . . . . .	578
30.87.3.24	insert_column . . . . .	578
30.87.3.25	insert_column_ . . . . .	578
30.87.3.26	insertfile . . . . .	578
30.87.3.27	length . . . . .	579
30.87.3.28	line_start . . . . .	579
30.87.3.29	line_text . . . . .	579
30.87.3.30	null_substitution_character . . . . .	579
30.87.3.31	loutputfile . . . . .	579
30.87.3.32	overlay_rectangular . . . . .	579
30.87.3.33	overlay_rectangular_ . . . . .	580
30.87.3.34	primary_selection . . . . .	580
30.87.3.35	rectangular_selection_boundaries . . . . .	580
30.87.3.36	remove . . . . .	580
30.87.3.37	remove_ . . . . .	581
30.87.3.38	remove_modify_callback . . . . .	581
30.87.3.39	remove_pdelete_callback . . . . .	581
30.87.3.40	remove_rectangular_ . . . . .	581
30.87.3.41	remove_secondary_selection . . . . .	581
30.87.3.42	remove_selection . . . . .	581
30.87.3.43	remove_selection_ . . . . .	582
30.87.3.44	replace_rectangular . . . . .	582
30.87.3.45	replace_secondary_selection . . . . .	582

30.87.3.46replace_selection . . . . .	582
30.87.3.47replace_selection_ . . . . .	582
30.87.3.48rewind_lines . . . . .	582
30.87.3.49secondary_select . . . . .	583
30.87.3.50secondary_selection . . . . .	583
30.87.3.51secondary_selection_position . . . . .	583
30.87.3.52secondary_selection_position . . . . .	583
30.87.3.53secondary_selection_text . . . . .	583
30.87.3.54secondary_unselect . . . . .	583
30.87.3.55select . . . . .	583
30.87.3.56selection_text . . . . .	583
30.87.3.57substitute_null_characters . . . . .	584
30.87.3.58tab_distance . . . . .	584
30.87.3.59text . . . . .	584
30.87.3.60text_in_rectangle . . . . .	584
30.87.3.61text_range . . . . .	584
30.87.3.62unhighlight . . . . .	585
30.87.3.63unsubstitute_null_characters . . . . .	585
30.87.3.64word_end . . . . .	585
30.87.4 Member Data Documentation . . . . .	585
30.87.4.1 mModifyProcs . . . . .	585
30.87.4.2 mNullSubsChar . . . . .	585
30.87.4.3 mPredeleteProcs . . . . .	585
30.87.4.4 mTabDist . . . . .	585
30.88 Fl_Text_Display Class Reference . . . . .	587
30.88.1 Detailed Description . . . . .	594
30.88.2 Constructor & Destructor Documentation . . . . .	594
30.88.2.1 Fl_Text_Display . . . . .	594
30.88.2.2 ~Fl_Text_Display . . . . .	594
30.88.3 Member Function Documentation . . . . .	594
30.88.3.1 buffer . . . . .	594
30.88.3.2 buffer . . . . .	594
30.88.3.3 calc_line_starts . . . . .	595
30.88.3.4 count_lines . . . . .	595
30.88.3.5 cursor_color . . . . .	595
30.88.3.6 cursor_color . . . . .	595

30.88.3.7 cursor_style . . . . .	595
30.88.3.8 display_insert . . . . .	595
30.88.3.9 draw . . . . .	596
30.88.3.10 draw_line_numbers . . . . .	596
30.88.3.11 draw_range . . . . .	596
30.88.3.12 draw_string . . . . .	596
30.88.3.13 draw_text . . . . .	597
30.88.3.14 find_line_end . . . . .	597
30.88.3.15 find_wrap_range . . . . .	597
30.88.3.16 get_absolute_top_line_number . . . . .	597
30.88.3.17 handle . . . . .	597
30.88.3.18 highlight_data . . . . .	598
30.88.3.19 insert . . . . .	598
30.88.3.20 line_end . . . . .	599
30.88.3.21 maintain_absolute_top_line_number . . . . .	599
30.88.3.22 measure_deleted_lines . . . . .	599
30.88.3.23 measure_proportional_character . . . . .	599
30.88.3.24 move_down . . . . .	600
30.88.3.25 move_left . . . . .	600
30.88.3.26 move_right . . . . .	600
30.88.3.27 move_up . . . . .	600
30.88.3.28 next_word . . . . .	600
30.88.3.29 offset_line_starts . . . . .	601
30.88.3.30 overstrike . . . . .	601
30.88.3.31 position_style . . . . .	601
30.88.3.32 position_to_line . . . . .	601
30.88.3.33 position_to_linecol . . . . .	601
30.88.3.34 position_to_xy . . . . .	602
30.88.3.35 previous_word . . . . .	602
30.88.3.36 redisplay_range . . . . .	602
30.88.3.37 reset_absolute_top_line_number . . . . .	602
30.88.3.38 scroll . . . . .	602
30.88.3.39 scrollbar_width . . . . .	603
30.88.3.40 scrollbar_width . . . . .	603
30.88.3.41 shortcut . . . . .	603
30.88.3.42 shortcut . . . . .	603

30.88.3.43	show_insert_position	603
30.88.3.44	skip_lines	603
30.88.3.45	textcolor	603
30.88.3.46	textcolor	604
30.88.3.47	textfont	604
30.88.3.48	textfont	604
30.88.3.49	textsize	604
30.88.3.50	textsize	604
30.88.3.51	lword_end	604
30.88.3.52	word_start	604
30.88.3.53	wrap_mode	604
30.88.3.54	wrap_uses_character	604
30.88.3.55	wrapped_column	605
30.88.3.56	wrapped_line_counter	605
30.88.3.57	wrapped_row	605
30.88.3.58	y_to_position	606
30.88.3.59	xy_to_rowcol	606
30.89	Fl_Text_Display::Style_Table_Entry Struct Reference	607
30.89.1	Detailed Description	607
30.90	Fl_Text_Editor Class Reference	608
30.90.1	Detailed Description	611
30.90.2	Constructor & Destructor Documentation	611
30.90.2.1	Fl_Text_Editor	611
30.90.3	Member Function Documentation	611
30.90.3.1	add_default_key_bindings	611
30.90.3.2	bound_key_function	611
30.90.3.3	bound_key_function	611
30.90.3.4	default_key_function	612
30.90.3.5	handle	612
30.90.3.6	insert_mode	612
30.90.3.7	insert_mode	612
30.90.3.8	kf_backspace	613
30.90.3.9	kf_c_s_move	613
30.90.3.10	kf_copy	613
30.90.3.11	kf_cut	613
30.90.3.12	kf_delete	613

30.90.3.13kf_down . . . . .	613
30.90.3.14kf_end . . . . .	613
30.90.3.15kf_home . . . . .	613
30.90.3.16kf_insert . . . . .	614
30.90.3.17kf_left . . . . .	614
30.90.3.18kf_move . . . . .	614
30.90.3.19kf_page_down . . . . .	614
30.90.3.20kf_page_up . . . . .	614
30.90.3.21kf_paste . . . . .	614
30.90.3.22kf_right . . . . .	614
30.90.3.23kf_select_all . . . . .	614
30.90.3.24kf_shift_move . . . . .	615
30.90.3.25kf_undo . . . . .	615
30.90.3.26kf_up . . . . .	615
30.90.3.27remove_all_key_bindings . . . . .	615
30.90.3.28remove_all_key_bindings . . . . .	615
30.90.3.29remove_key_binding . . . . .	615
30.91Fl_Text_Editor::Key_Binding Struct Reference . . . . .	616
30.91.1 Detailed Description . . . . .	616
30.92Fl_Text_Selection Class Reference . . . . .	617
30.92.1 Detailed Description . . . . .	617
30.93Fl_Tile Class Reference . . . . .	619
30.93.1 Detailed Description . . . . .	619
30.93.2 Constructor & Destructor Documentation . . . . .	620
30.93.2.1 Fl_Tile . . . . .	620
30.93.3 Member Function Documentation . . . . .	620
30.93.3.1 handle . . . . .	620
30.93.3.2 position . . . . .	621
30.93.3.3 resize . . . . .	621
30.94Fl_Tiled_Image Class Reference . . . . .	622
30.94.1 Detailed Description . . . . .	623
30.94.2 Constructor & Destructor Documentation . . . . .	623
30.94.2.1 Fl_Tiled_Image . . . . .	623
30.94.3 Member Function Documentation . . . . .	623
30.94.3.1 color_average . . . . .	623
30.94.3.2 copy . . . . .	623

30.94.3.3 copy . . . . .	623
30.94.3.4 desaturate . . . . .	624
30.94.3.5 draw . . . . .	624
30.94.3.6 draw . . . . .	624
30.95FL_Timer Class Reference . . . . .	625
30.95.1 Detailed Description . . . . .	626
30.95.2 Constructor & Destructor Documentation . . . . .	626
30.95.2.1 FL_Timer . . . . .	626
30.95.3 Member Function Documentation . . . . .	626
30.95.3.1 direction . . . . .	626
30.95.3.2 direction . . . . .	626
30.95.3.3 draw . . . . .	626
30.95.3.4 handle . . . . .	627
30.95.3.5 suspended . . . . .	627
30.95.3.6 suspended . . . . .	627
30.96FL_Toggle_Button Class Reference . . . . .	628
30.96.1 Detailed Description . . . . .	628
30.96.2 Constructor & Destructor Documentation . . . . .	628
30.96.2.1 FL_Toggle_Button . . . . .	628
30.97FL_Tooltip Class Reference . . . . .	629
30.97.1 Detailed Description . . . . .	630
30.97.2 Member Function Documentation . . . . .	630
30.97.2.1 color . . . . .	630
30.97.2.2 color . . . . .	630
30.97.2.3 current . . . . .	630
30.97.2.4 delay . . . . .	631
30.97.2.5 delay . . . . .	631
30.97.2.6 disable . . . . .	631
30.97.2.7 enable . . . . .	631
30.97.2.8 enabled . . . . .	631
30.97.2.9 enter_area . . . . .	631
30.97.2.10 font . . . . .	631
30.97.2.11 lfont . . . . .	631
30.97.2.12 hoverdelay . . . . .	632
30.97.2.13 hoverdelay . . . . .	632
30.97.2.14 size . . . . .	632

30.97.2.15size . . . . .	632
30.97.2.16textcolor . . . . .	632
30.97.2.17textcolor . . . . .	632
30.98Fl_Valuator Class Reference . . . . .	633
30.98.1 Detailed Description . . . . .	635
30.98.2 Constructor & Destructor Documentation . . . . .	635
30.98.2.1 Fl_Valuator . . . . .	635
30.98.3 Member Function Documentation . . . . .	635
30.98.3.1 bounds . . . . .	635
30.98.3.2 clamp . . . . .	636
30.98.3.3 format . . . . .	636
30.98.3.4 handle_drag . . . . .	636
30.98.3.5 handle_release . . . . .	636
30.98.3.6 increment . . . . .	636
30.98.3.7 maximum . . . . .	637
30.98.3.8 maximum . . . . .	637
30.98.3.9 minimum . . . . .	637
30.98.3.10minimum . . . . .	637
30.98.3.11precision . . . . .	637
30.98.3.12range . . . . .	637
30.98.3.13round . . . . .	637
30.98.3.14set_value . . . . .	637
30.98.3.15step . . . . .	638
30.98.3.16value . . . . .	638
30.98.3.17value . . . . .	638
30.99Fl_Value_Input Class Reference . . . . .	639
30.99.1 Detailed Description . . . . .	640
30.99.2 Constructor & Destructor Documentation . . . . .	641
30.99.2.1 Fl_Value_Input . . . . .	641
30.99.3 Member Function Documentation . . . . .	641
30.99.3.1 cursor_color . . . . .	641
30.99.3.2 cursor_color . . . . .	641
30.99.3.3 draw . . . . .	642
30.99.3.4 handle . . . . .	642
30.99.3.5 resize . . . . .	642
30.99.3.6 shortcut . . . . .	643

30.99.3.7 soft . . . . .	643
30.99.3.8 textcolor . . . . .	643
30.99.3.9 textcolor . . . . .	643
30.99.3.10 textfont . . . . .	643
30.99.3.11 textfont . . . . .	643
30.99.3.12 textsize . . . . .	644
30.99.3.13 textsize . . . . .	644
30.10 <a href="#">IFL_Value_Output Class Reference</a> . . . . .	645
30.100.1 <a href="#">Detailed Description</a> . . . . .	646
30.100.2 <a href="#">Constructor &amp; Destructor Documentation</a> . . . . .	646
30.100.2.1 <a href="#">IFL_Value_Output</a> . . . . .	646
30.100.3 <a href="#">Member Function Documentation</a> . . . . .	647
30.100.3.1 <a href="#">ldraw</a> . . . . .	647
30.100.3.2 <a href="#">handle</a> . . . . .	647
30.100.3.3 <a href="#">soft</a> . . . . .	647
30.100.3.4 <a href="#">soft</a> . . . . .	648
30.100.3.5 <a href="#">textcolor</a> . . . . .	648
30.100.3.6 <a href="#">textcolor</a> . . . . .	648
30.100.3.7 <a href="#">textfont</a> . . . . .	648
30.100.3.8 <a href="#">textfont</a> . . . . .	648
30.100.3.9 <a href="#">textsize</a> . . . . .	648
30.10 <a href="#">IFL_Value_Slider Class Reference</a> . . . . .	649
30.101.1 <a href="#">Detailed Description</a> . . . . .	650
30.101.2 <a href="#">Constructor &amp; Destructor Documentation</a> . . . . .	650
30.101.2.1 <a href="#">IFL_Value_Slider</a> . . . . .	650
30.101.3 <a href="#">Member Function Documentation</a> . . . . .	650
30.101.3.1 <a href="#">ldraw</a> . . . . .	650
30.101.3.2 <a href="#">handle</a> . . . . .	650
30.101.3.3 <a href="#">textcolor</a> . . . . .	651
30.101.3.4 <a href="#">textcolor</a> . . . . .	651
30.101.3.5 <a href="#">textfont</a> . . . . .	651
30.101.3.6 <a href="#">textfont</a> . . . . .	651
30.101.3.7 <a href="#">textsize</a> . . . . .	651
30.101.3.8 <a href="#">textsize</a> . . . . .	651
30.10 <a href="#">IFL_Widget Class Reference</a> . . . . .	653
30.102.1 <a href="#">Detailed Description</a> . . . . .	661

---

30.102.2Member Enumeration Documentation . . . . .	661
30.102.2.1"@20 . . . . .	661
30.102.3Constructor & Destructor Documentation . . . . .	661
30.102.3.1Fl_Widget . . . . .	661
30.102.3.2~Fl_Widget . . . . .	662
30.102.4Member Function Documentation . . . . .	662
30.102.4.lactivate . . . . .	662
30.102.4.2active . . . . .	662
30.102.4.3active_r . . . . .	662
30.102.4.4align . . . . .	663
30.102.4.5align . . . . .	663
30.102.4.6argument . . . . .	664
30.102.4.7box . . . . .	664
30.102.4.8box . . . . .	664
30.102.4.9callback . . . . .	665
30.102.4.10callback . . . . .	665
30.102.4.1dallback . . . . .	665
30.102.4.1lcallback . . . . .	665
30.102.4.1lcallback . . . . .	665
30.102.4.1changed . . . . .	666
30.102.4.1clear_changed . . . . .	666
30.102.4.1clear_damage . . . . .	666
30.102.4.1clear_output . . . . .	667
30.102.4.1clear_visible . . . . .	667
30.102.4.1clear_visible_focus . . . . .	667
30.102.4.2blor . . . . .	667
30.102.4.2dolor . . . . .	667
30.102.4.2dolor . . . . .	668
30.102.4.2dolor2 . . . . .	668
30.102.4.2dolor2 . . . . .	668
30.102.4.25ontains . . . . .	668
30.102.4.26opy_label . . . . .	669
30.102.4.27amage . . . . .	669
30.102.4.28amage . . . . .	669
30.102.4.29amage . . . . .	670
30.102.4.30amage_resize . . . . .	670

30.102.4.3 <del>deactivate</del>	670
30.102.4.3 <del>default_callback</del>	671
30.102.4.3 <del>eimage</del>	671
30.102.4.3 <del>eimage</del>	671
30.102.4.3 <del>eimage</del>	671
30.102.4.3 <del>eo_callback</del>	671
30.102.4.3 <del>eo_callback</del>	672
30.102.4.3 <del>eo_callback</del>	672
30.102.4.3 <del>raw</del>	672
30.102.4.4 <del>raw_box</del>	673
30.102.4.4 <del>draw_box</del>	673
30.102.4.4 <del>draw_focus</del>	673
30.102.4.4 <del>l</del>	673
30.102.4.4 <del>l</del>	674
30.102.4.4 <del>handle</del>	674
30.102.4.4 <del>ide</del>	674
30.102.4.4 <del>image</del>	675
30.102.4.4 <del>image</del>	675
30.102.4.4 <del>image</del>	675
30.102.4.5 <del>inside</del>	675
30.102.4.5 <del>label</del>	676
30.102.4.5 <del>label</del>	676
30.102.4.5 <del>label</del>	676
30.102.4.5 <del>label_shortcut</del>	677
30.102.4.5 <del>labelcolor</del>	677
30.102.4.5 <del>labelcolor</del>	677
30.102.4.5 <del>labelfont</del>	677
30.102.4.5 <del>labelfont</del>	677
30.102.4.5 <del>labelsize</del>	678
30.102.4.6 <del>labelsize</del>	678
30.102.4.6 <del>labeltype</del>	678
30.102.4.6 <del>labeltype</del>	678
30.102.4.6 <del>measure_label</del>	679
30.102.4.6 <del>output</del>	679
30.102.4.6 <del>parent</del>	679
30.102.4.6 <del>parent</del>	679

30.102.4.6 <del>position</del>	680
30.102.4.6 <del>draw</del>	680
30.102.4.6 <del>draw_label</del>	680
30.102.4.7 <del>size</del>	680
30.102.4.7 <del>selection_color</del>	681
30.102.4.7 <del>selection_color</del>	681
30.102.4.7 <del>set_changed</del>	682
30.102.4.7 <del>set_output</del>	682
30.102.4.7 <del>set_visible</del>	682
30.102.4.7 <del>set_visible_focus</del>	682
30.102.4.7 <del>show</del>	683
30.102.4.7 <del>size</del>	683
30.102.4.7 <del>take_focus</del>	683
30.102.4.8 <del>akesevents</del>	684
30.102.4.8 <del>est_shortcut</del>	684
30.102.4.8 <del>est_shortcut</del>	684
30.102.4.8 <del>oltip</del>	684
30.102.4.8 <del>oltip</del>	685
30.102.4.8 <del>ype</del>	685
30.102.4.8 <del>ype</del>	685
30.102.4.8 <del>ser_data</del>	685
30.102.4.8 <del>ser_data</del>	686
30.102.4.8 <del>visible</del>	686
30.102.4.9 <del>visible_focus</del>	686
30.102.4.9 <del>visible_focus</del>	686
30.102.4.9 <del>visible_r</del>	687
30.102.4.9 <del>r</del>	687
30.102.4.9 <del>4</del>	687
30.102.4.9 <del>when</del>	688
30.102.4.9 <del>when</del>	688
30.102.4.9 <del>window</del>	689
30.102.4.9 <del>8</del>	689
30.102.4.9 <del>9</del>	689
30.102.4.1 <del>00</del>	690
30.102.4.1 <del>01</del>	690
30.10FL_Window Class Reference	691

30.103.1Detailed Description . . . . .	694
30.103.2Constructor & Destructor Documentation . . . . .	694
30.103.2.1Fl_Window . . . . .	694
30.103.2.2Fl_Window . . . . .	695
30.103.2.3~Fl_Window . . . . .	695
30.103.3Member Function Documentation . . . . .	695
30.103.3.1lborder . . . . .	695
30.103.3.2clear_border . . . . .	695
30.103.3.3copy_label . . . . .	696
30.103.3.4current . . . . .	696
30.103.3.5cursor . . . . .	696
30.103.3.6default_cursor . . . . .	696
30.103.3.7draw . . . . .	697
30.103.3.8flush . . . . .	697
30.103.3.9fullscreen . . . . .	697
30.103.3.10handle . . . . .	697
30.103.3.11hide . . . . .	698
30.103.3.12spot . . . . .	698
30.103.3.13iconize . . . . .	698
30.103.3.14iconlabel . . . . .	699
30.103.3.15label . . . . .	699
30.103.3.16label . . . . .	699
30.103.3.17make_current . . . . .	699
30.103.3.18modal . . . . .	699
30.103.3.19on_modal . . . . .	699
30.103.3.20override . . . . .	700
30.103.3.21resize . . . . .	700
30.103.3.22set_modal . . . . .	700
30.103.3.23set_non_modal . . . . .	700
30.103.3.24show . . . . .	700
30.103.3.25shown . . . . .	701
30.103.3.26size_range . . . . .	701
30.103.3.27class . . . . .	702
30.103.4Member Data Documentation . . . . .	702
30.103.4.1current_ . . . . .	702
30.104Fl_Wizard Class Reference . . . . .	703

---

30.104.1Detailed Description . . . . .	703
30.104.2Constructor & Destructor Documentation . . . . .	703
30.104.2.1FL_Wizard . . . . .	703
30.104.3Member Function Documentation . . . . .	704
30.104.3.1next . . . . .	704
30.104.3.2prev . . . . .	704
30.104.3.3value . . . . .	704
30.104.3.4value . . . . .	704
30.105FL_XBM_Image Class Reference . . . . .	705
30.105.1Detailed Description . . . . .	705
30.105.2Constructor & Destructor Documentation . . . . .	705
30.105.2.1FL_XBM_Image . . . . .	705
30.106FL_XPM_Image Class Reference . . . . .	706
30.106.1Detailed Description . . . . .	706
30.106.2Constructor & Destructor Documentation . . . . .	706
30.106.2.1FL_XPM_Image . . . . .	706
<b>31 File Documentation</b> . . . . .	<b>707</b>
31.1 Enumerations.H File Reference . . . . .	707
31.1.1 Detailed Description . . . . .	712
31.1.2 Define Documentation . . . . .	712
31.1.2.1 FL_MAJOR_VERSION . . . . .	712
31.1.2.2 FL_MINOR_VERSION . . . . .	712
31.1.2.3 FL_PATCH_VERSION . . . . .	712
31.1.2.4 FL_VERSION . . . . .	712
31.1.3 Typedef Documentation . . . . .	713
31.1.3.1 FL_Align . . . . .	713
31.1.3.2 FL_Font . . . . .	713
31.1.3.3 FL_Fontsize . . . . .	713
31.1.4 Enumeration Type Documentation . . . . .	713
31.1.4.1 FL_Boxtype . . . . .	713
31.1.4.2 FL_Color . . . . .	714
31.1.4.3 FL_Event . . . . .	715
31.1.4.4 FL_Labeltype . . . . .	717
31.1.4.5 FL_When . . . . .	718
31.1.5 Variable Documentation . . . . .	718
31.1.5.1 FL_ALIGN_BOTTOM . . . . .	718

31.1.5.2 FL_ALIGN_CENTER . . . . .	718
31.1.5.3 FL_ALIGN_CLIP . . . . .	719
31.1.5.4 FL_ALIGN_IMAGE_OVER_TEXT . . . . .	719
31.1.5.5 FL_ALIGN_INSIDE . . . . .	719
31.1.5.6 FL_ALIGN_LEFT . . . . .	719
31.1.5.7 FL_ALIGN_RIGHT . . . . .	719
31.1.5.8 FL_ALIGN_TEXT_OVER_IMAGE . . . . .	719
31.1.5.9 FL_ALIGN_TOP . . . . .	719
31.1.5.10 FL_ALIGN_WRAP . . . . .	720
31.2 Fl.H File Reference . . . . .	721
31.2.1 Detailed Description . . . . .	721
31.3 Fl_Adjuster.H File Reference . . . . .	722
31.3.1 Detailed Description . . . . .	722
31.4 fl_arc.cxx File Reference . . . . .	723
31.4.1 Detailed Description . . . . .	723
31.4.2 Function Documentation . . . . .	723
31.4.2.1 fl_arc . . . . .	723
31.5 fl_arci.cxx File Reference . . . . .	724
31.5.1 Detailed Description . . . . .	724
31.5.2 Function Documentation . . . . .	724
31.5.2.1 fl_arc . . . . .	724
31.5.2.2 fl_pie . . . . .	724
31.6 Fl_Bitmap.H File Reference . . . . .	726
31.6.1 Detailed Description . . . . .	726
31.7 Fl_BMP_Image.H File Reference . . . . .	727
31.7.1 Detailed Description . . . . .	727
31.8 Fl_Box.H File Reference . . . . .	728
31.8.1 Detailed Description . . . . .	728
31.9 fl_boxtype.cxx File Reference . . . . .	729
31.9.1 Detailed Description . . . . .	730
31.9.2 Function Documentation . . . . .	730
31.9.2.1 fl_draw_box . . . . .	730
31.9.2.2 fl_frame . . . . .	731
31.9.2.3 fl_frame2 . . . . .	731
31.9.2.4 fl_internal_boxtype . . . . .	731
31.10Fl_Browser.H File Reference . . . . .	732

31.10.1 Detailed Description . . . . .	732
31.11 Fl_Browser_.H File Reference . . . . .	733
31.11.1 Detailed Description . . . . .	733
31.12 Fl_Button.H File Reference . . . . .	734
31.12.1 Detailed Description . . . . .	734
31.12.2 Define Documentation . . . . .	734
31.12.2.1 FL_RADIO_BUTTON . . . . .	734
31.13 Fl_Cairo.H File Reference . . . . .	735
31.13.1 Detailed Description . . . . .	735
31.14 Fl_Cairo_Window.H File Reference . . . . .	736
31.14.1 Detailed Description . . . . .	736
31.15 Fl_Chart.H File Reference . . . . .	737
31.15.1 Detailed Description . . . . .	738
31.16 Fl_Check_Browser.H File Reference . . . . .	739
31.16.1 Detailed Description . . . . .	739
31.17 Fl_Check_Button.H File Reference . . . . .	740
31.17.1 Detailed Description . . . . .	740
31.18 Fl_Choice.H File Reference . . . . .	741
31.18.1 Detailed Description . . . . .	741
31.19 Fl_Clock.H File Reference . . . . .	742
31.19.1 Detailed Description . . . . .	742
31.20 fl_color.cxx File Reference . . . . .	743
31.20.1 Detailed Description . . . . .	743
31.20.2 Function Documentation . . . . .	744
31.20.2.1 fl_color . . . . .	744
31.20.2.2 fl_color . . . . .	744
31.21 Fl_Color_Chooser.H File Reference . . . . .	745
31.21.1 Detailed Description . . . . .	745
31.22 Fl_Counter.H File Reference . . . . .	746
31.22.1 Detailed Description . . . . .	746
31.23 fl_curve.cxx File Reference . . . . .	747
31.23.1 Detailed Description . . . . .	747
31.23.2 Function Documentation . . . . .	747
31.23.2.1 fl_curve . . . . .	747
31.24 Fl_Dial.H File Reference . . . . .	748
31.24.1 Detailed Description . . . . .	748

31.25	Fl_Double_Window.H File Reference	749
31.25.1	Detailed Description	749
31.26	fl_draw.H File Reference	750
31.26.1	Detailed Description	755
31.26.2	Function Documentation	755
31.26.2.1	fl_arc	755
31.26.2.2	fl_arc	755
31.26.2.3	fl_begin_complex_polygon	756
31.26.2.4	fl_begin_points	756
31.26.2.5	fl_circle	756
31.26.2.6	fl_clip_box	756
31.26.2.7	fl_color	757
31.26.2.8	fl_color	757
31.26.2.9	fl_color	757
31.26.2.10	fl_curve	757
31.26.2.11	fl_draw_box	758
31.26.2.12	fl_frame	758
31.26.2.13	fl_frame2	758
31.26.2.14	fl_gap	759
31.26.2.15	fl_mult_matrix	759
31.26.2.16	fl_not_clipped	759
31.26.2.17	fl_pie	759
31.26.2.18	fl_polygon	760
31.26.2.19	fl_polygon	760
31.26.2.20	fl_pop_clip	760
31.26.2.21	fl_push_clip	760
31.26.2.22	fl_push_matrix	760
31.26.2.23	fl_rotate	760
31.26.2.24	fl_scale	761
31.26.2.25	fl_scale	761
31.26.2.26	fl_transform_dx	761
31.26.2.27	fl_transform_dy	761
31.26.2.28	fl_transform_x	761
31.26.2.29	fl_transform_y	762
31.26.2.30	fl_transformed_vertex	762
31.26.2.31	fl_translate	762

31.26.2.32fl_vertex . . . . .	762
31.27FL_File_Browser.H File Reference . . . . .	763
31.27.1 Detailed Description . . . . .	763
31.28FL_File_Icon.H File Reference . . . . .	764
31.28.1 Detailed Description . . . . .	764
31.29FL_File_Input.H File Reference . . . . .	765
31.29.1 Detailed Description . . . . .	765
31.30FL_Fill_Dial.H File Reference . . . . .	766
31.30.1 Detailed Description . . . . .	766
31.31FL_Fill_Slider.H File Reference . . . . .	767
31.31.1 Detailed Description . . . . .	767
31.32FL_Float_Input.H File Reference . . . . .	768
31.32.1 Detailed Description . . . . .	768
31.33FL_FormsBitmap.H File Reference . . . . .	769
31.33.1 Detailed Description . . . . .	769
31.34FL_FormsPixmap.H File Reference . . . . .	770
31.34.1 Detailed Description . . . . .	770
31.35FL_Free.H File Reference . . . . .	771
31.35.1 Detailed Description . . . . .	772
31.36FL_GIF_Image.H File Reference . . . . .	773
31.36.1 Detailed Description . . . . .	773
31.37FL_Gl_Window.H File Reference . . . . .	774
31.37.1 Detailed Description . . . . .	774
31.38FL_Group.H File Reference . . . . .	775
31.38.1 Detailed Description . . . . .	775
31.39FL_Help_Dialog.H File Reference . . . . .	776
31.39.1 Detailed Description . . . . .	776
31.40FL_Help_View.H File Reference . . . . .	777
31.40.1 Detailed Description . . . . .	777
31.41FL_Hold_Browser.H File Reference . . . . .	778
31.41.1 Detailed Description . . . . .	778
31.42FL_Hor_Fill_Slider.H File Reference . . . . .	779
31.42.1 Detailed Description . . . . .	779
31.43FL_Hor_Nice_Slider.H File Reference . . . . .	780
31.43.1 Detailed Description . . . . .	780
31.44FL_Hor_Slider.H File Reference . . . . .	781

31.44.1 Detailed Description . . . . .	781
31.45Fl_Hor_Value_Slider.H File Reference . . . . .	782
31.45.1 Detailed Description . . . . .	782
31.46Fl_Image.H File Reference . . . . .	783
31.46.1 Detailed Description . . . . .	783
31.47Fl_Input.H File Reference . . . . .	784
31.47.1 Detailed Description . . . . .	784
31.48Fl_Input_.H File Reference . . . . .	785
31.48.1 Detailed Description . . . . .	785
31.49Fl_Input_Choice.H File Reference . . . . .	786
31.49.1 Detailed Description . . . . .	786
31.50Fl_Int_Input.H File Reference . . . . .	787
31.50.1 Detailed Description . . . . .	787
31.51Fl_JPEG_Image.H File Reference . . . . .	788
31.51.1 Detailed Description . . . . .	788
31.52Fl_Light_Button.H File Reference . . . . .	789
31.52.1 Detailed Description . . . . .	789
31.53Fl_Line_Dial.H File Reference . . . . .	790
31.53.1 Detailed Description . . . . .	790
31.54Fl_Menu_.H File Reference . . . . .	791
31.54.1 Detailed Description . . . . .	791
31.55Fl_Menu_Bar.H File Reference . . . . .	792
31.55.1 Detailed Description . . . . .	792
31.56Fl_Menu_Button.H File Reference . . . . .	793
31.56.1 Detailed Description . . . . .	793
31.57Fl_Menu_Window.H File Reference . . . . .	794
31.57.1 Detailed Description . . . . .	794
31.58Fl_Multi_Browser.H File Reference . . . . .	795
31.58.1 Detailed Description . . . . .	795
31.59Fl_Multiline_Input.H File Reference . . . . .	796
31.59.1 Detailed Description . . . . .	796
31.60Fl_Multiline_Output.H File Reference . . . . .	797
31.60.1 Detailed Description . . . . .	797
31.61Fl_Nice_Slider.H File Reference . . . . .	798
31.61.1 Detailed Description . . . . .	798
31.62Fl_Output.H File Reference . . . . .	799

31.62.1 Detailed Description . . . . .	799
31.63FL_Overlay_Window.H File Reference . . . . .	800
31.63.1 Detailed Description . . . . .	800
31.64FL_Pack.H File Reference . . . . .	801
31.64.1 Detailed Description . . . . .	801
31.65FL_Pixmap.H File Reference . . . . .	802
31.65.1 Detailed Description . . . . .	802
31.66FL_PNG_Image.H File Reference . . . . .	803
31.66.1 Detailed Description . . . . .	803
31.67FL_PNM_Image.H File Reference . . . . .	804
31.67.1 Detailed Description . . . . .	804
31.68FL_Positioner.H File Reference . . . . .	805
31.68.1 Detailed Description . . . . .	805
31.69FL_Preferences.H File Reference . . . . .	806
31.69.1 Detailed Description . . . . .	806
31.70FL_Progress.H File Reference . . . . .	807
31.70.1 Detailed Description . . . . .	807
31.71FL_Radio_Button.H File Reference . . . . .	808
31.71.1 Detailed Description . . . . .	808
31.72FL_Radio_Light_Button.H File Reference . . . . .	809
31.72.1 Detailed Description . . . . .	809
31.73FL_Radio_Round_Button.H File Reference . . . . .	810
31.73.1 Detailed Description . . . . .	810
31.74fl_rect.cxx File Reference . . . . .	811
31.74.1 Detailed Description . . . . .	812
31.74.2 Function Documentation . . . . .	813
31.74.2.1 fl_clip_box . . . . .	813
31.74.2.2 fl_clip_region . . . . .	813
31.74.2.3 fl_clip_region . . . . .	813
31.74.2.4 fl_not_clipped . . . . .	813
31.74.2.5 fl_polygon . . . . .	814
31.74.2.6 fl_polygon . . . . .	814
31.74.2.7 fl_pop_clip . . . . .	814
31.74.2.8 fl_push_clip . . . . .	814
31.75FL_Repeat_Button.H File Reference . . . . .	815
31.75.1 Detailed Description . . . . .	815

31.76FL_Return_Button.H File Reference . . . . .	816
31.76.1 Detailed Description . . . . .	816
31.77FL_Roller.H File Reference . . . . .	817
31.77.1 Detailed Description . . . . .	817
31.78FL_Round_Button.H File Reference . . . . .	818
31.78.1 Detailed Description . . . . .	818
31.79FL_Round_Clock.H File Reference . . . . .	819
31.79.1 Detailed Description . . . . .	819
31.80FL_Scroll.H File Reference . . . . .	820
31.80.1 Detailed Description . . . . .	820
31.81FL_Scrollbar.H File Reference . . . . .	821
31.81.1 Detailed Description . . . . .	821
31.82FL_Secret_Input.H File Reference . . . . .	822
31.82.1 Detailed Description . . . . .	822
31.83FL_Select_Browser.H File Reference . . . . .	823
31.83.1 Detailed Description . . . . .	823
31.84FL_Shared_Image.H File Reference . . . . .	824
31.84.1 Detailed Description . . . . .	824
31.85FL_Simple_Counter.H File Reference . . . . .	825
31.85.1 Detailed Description . . . . .	825
31.86FL_Single_Window.H File Reference . . . . .	826
31.86.1 Detailed Description . . . . .	826
31.87FL_Slider.H File Reference . . . . .	827
31.87.1 Detailed Description . . . . .	827
31.88FL_Spinner.H File Reference . . . . .	828
31.88.1 Detailed Description . . . . .	828
31.89FL_Tabs.H File Reference . . . . .	829
31.89.1 Detailed Description . . . . .	829
31.90FL_Text_Buffer.H File Reference . . . . .	830
31.90.1 Detailed Description . . . . .	830
31.91FL_Text_Display.H File Reference . . . . .	831
31.91.1 Detailed Description . . . . .	831
31.92FL_Text_Editor.H File Reference . . . . .	832
31.92.1 Detailed Description . . . . .	832
31.93FL_Tile.H File Reference . . . . .	833
31.93.1 Detailed Description . . . . .	833

31.94Fl_Tiled_Image.H File Reference . . . . .	834
31.94.1 Detailed Description . . . . .	834
31.95Fl_Timer.H File Reference . . . . .	835
31.95.1 Detailed Description . . . . .	835
31.96Fl_Toggle_Button.H File Reference . . . . .	836
31.96.1 Detailed Description . . . . .	836
31.97Fl_Tooltip.H File Reference . . . . .	837
31.97.1 Detailed Description . . . . .	837
31.98fl_types.h File Reference . . . . .	838
31.98.1 Detailed Description . . . . .	838
31.98.2 Typedef Documentation . . . . .	838
31.98.2.1 Fl_CString . . . . .	838
31.98.2.2 Fl_String . . . . .	838
31.99Fl_Valuator.H File Reference . . . . .	839
31.99.1 Detailed Description . . . . .	839
31.10Fl_Value_Input.H File Reference . . . . .	840
31.100.1 Detailed Description . . . . .	840
31.10Fl_Value_Output.H File Reference . . . . .	841
31.101.1 Detailed Description . . . . .	841
31.10Fl_Value_Slider.H File Reference . . . . .	842
31.102.1 Detailed Description . . . . .	842
31.10fl_vertex.cxx File Reference . . . . .	843
31.103.1 Detailed Description . . . . .	845
31.103.2 Function Documentation . . . . .	845
31.103.2.1 fl_begin_complex_polygon . . . . .	845
31.103.2.2 fl_begin_points . . . . .	845
31.103.2.3 fl_circle . . . . .	845
31.103.2.4 fl_gap . . . . .	845
31.103.2.5 fl_mult_matrix . . . . .	846
31.103.2.6 fl_push_matrix . . . . .	846
31.103.2.7 fl_rotate . . . . .	846
31.103.2.8 fl_scale . . . . .	846
31.103.2.9 fl_scale . . . . .	846
31.103.2.10 fl_transform_dx . . . . .	847
31.103.2.11 fl_transform_dy . . . . .	847
31.103.2.12 fl_transform_x . . . . .	847

31.103.2. <b>Ifl_transform_y</b> . . . . .	847
31.103.2. <b>Ifl_transformed_vertex</b> . . . . .	848
31.103.2. <b>Ifl_translate</b> . . . . .	848
31.103.2. <b>Ifl_vertex</b> . . . . .	848
31.10 <b>FL_Widget.H</b> File Reference . . . . .	849
31.104.1 <b>Detailed Description</b> . . . . .	849
31.104.2 <b>Define Documentation</b> . . . . .	849
31.104.2.1 <b>FL_RESERVED_TYPE</b> . . . . .	849
31.10 <b>FL_Window.H</b> File Reference . . . . .	850
31.105.1 <b>Detailed Description</b> . . . . .	850
31.10 <b>FL_Wizard.H</b> File Reference . . . . .	851
31.106.1 <b>Detailed Description</b> . . . . .	851
31.10 <b>FL_XBM_Image.H</b> File Reference . . . . .	852
31.107.1 <b>Detailed Description</b> . . . . .	852
31.10 <b>FL_XPM_Image.H</b> File Reference . . . . .	853
31.108.1 <b>Detailed Description</b> . . . . .	853

# Chapter 1

# FLTK Programming Manual



## FLTK 1.3.0 Programming Manual

Revision 8 by Michael Sweet, Craig P. Earls,  
Matthias Melcher, and Bill Spitzak  
Copyright 1998-2008 by Bill Spitzak and others.

This software and manual are provided under the terms of the GNU Library General Public License.  
Permission is granted to reproduce this manual or any portion for any purpose, provided this copyright  
and permission notice are preserved.

Preface	10 - Advanced FLTK
1 - Introduction to FLTK	11 - Unicode and utf-8 Support
2 - FLTK Basics	A - Class Reference
3 - Common Widgets and Attributes	B - Function Reference
<ul style="list-style-type: none"><li>• Colors</li><li>• Box Types</li><li>• Labels and Label Types</li><li>• Drawing Images</li></ul>	C - FLTK Enumerations
4 - Designing a Simple Text Editor	D - GLUT Compatibility
5 - Drawing Things in FLTK	<ul style="list-style-type: none"><li>• class Fl_Glut_Window</li></ul>
6 - Handling Events	E - Forms Compatibility
<ul style="list-style-type: none"><li>• Fl::event_*() methods</li><li>• Event Propagation</li></ul>	F - Operating System Issues
7 - Adding and Extending Widgets	G - Migrating Code from FLTK 1.0 to 1.1
8 - Using OpenGL	H - Migrating Code from FLTK 1.1 to 1.3
9 - Programming with FLUID	I - Developer Information
<ul style="list-style-type: none"><li>• GUI Attributes</li><li>• Selecting and Moving Widgets</li><li>• Image Labels</li></ul>	J - Software License
	K - Example Source Code

## **Chapter 2**

### **Preface**

This manual describes the Fast Light Tool Kit ("FLTK") version 1.3.0, a C++ Graphical User Interface ("GUI") toolkit for UNIX, Microsoft Windows and MacOS.

Each of the chapters in this manual is designed as a tutorial for using FLTK, while the appendices provide a convenient reference for all FLTK widgets, functions, and operating system interfaces.

**This manual may be printed, modified, and/or used under the terms of the FLTK license provided in J - Software License.**

## 2.1 Organization

This manual is organized into the following chapters and appendices:

- [1 - Introduction to FLTK](#)
- [2 - FLTK Basics](#)
- [3 - Common Widgets and Attributes](#)
- [4 - Designing a Simple Text Editor](#)
- [5 - Drawing Things in FLTK](#)
- [6 - Handling Events](#)
- [7 - Adding and Extending Widgets](#)
- [8 - Using OpenGL](#)
- [9 - Programming with FLUID](#)
- [10 - Advanced FLTK](#)
- [11 - Unicode and utf-8 Support](#)
- [A - Class Reference](#)
- [B - Function Reference](#)
- [C - FLTK Enumerations](#)
- [D - GLUT Compatibility](#)
- [E - Forms Compatibility](#)
- [F - Operating System Issues](#)
- [G - Migrating Code from FLTK 1.0 to 1.1](#)
- [H - Migrating Code from FLTK 1.1 to 1.3](#)
- [I - Developer Information](#)
- [J - Software License](#)
- [K - Example Source Code](#)

## 2.2 Conventions

The following typeface conventions are used in this manual:

- Function and constant names are shown in **bold courier type**
- Code samples and commands are shown in **regular courier type**

## 2.3 Abbreviations

The following abbreviations are used in this manual:

### X11

The X Window System version 11.

### Xlib

The X Window System interface library.

### WIN32

The Microsoft Windows 32-bit Application Programmer's Interface.

### MacOS

The Apple Macintosh OS 8.6 and later, including OS X.

## 2.4 Copyrights and Trademarks

FLTK is Copyright 1998-2008 by Bill Spitzak and others. Use and distribution of FLTK is governed by the GNU Library General Public License with 4 exceptions, located in [J - Software License](#).

UNIX is a registered trademark of the X Open Group, Inc. Microsoft and Windows are registered trademarks of Microsoft Corporation. OpenGL is a registered trademark of Silicon Graphics, Inc. Apple, Macintosh, MacOS, and Mac OS X are registered trademarks of Apple Computer, Inc.



## **Chapter 3**

### **1 - Introduction to FLTK**

The Fast Light Tool Kit ("FLTK", pronounced "fulltick") is a cross-platform C++ GUI toolkit for UNIX®/Linux®(X11), Microsoft®Windows®, and MacOS®X.

FLTK provides modern GUI functionality without the bloat and supports 3D graphics via OpenGL®and its built-in GLUT emulation. It was originally developed by Mr. Bill Spitzak and is currently maintained by a small group of developers across the world with a central repository in the US.

### 3.1 History of FLTK

It has always been Bill's belief that the GUI API of all modern systems is much too high level. Toolkits (even FLTK) are *not* what should be provided and documented as part of an operating system. The system only has to provide arbitrary shaped but featureless windows, a powerful set of graphics drawing calls, and a simple *unalterable* method of delivering events to the owners of the windows. NeXT (if you ignored NextStep) provided this, but they chose to hide it and tried to push their own baroque toolkit instead.

Many of the ideas in FLTK were developed on a NeXT (but *not* using NextStep) in 1987 in a C toolkit Bill called "views". Here he came up with passing events downward in the tree and having the handle routine return a value indicating whether it used the event, and the table-driven menus. In general he was trying to prove that complex UI ideas could be entirely implemented in a user space toolkit, with no knowledge or support by the system.

After going to film school for a few years, Bill worked at Sun Microsystems on the (doomed) NeWS project. Here he found an even better and cleaner windowing system, and he reimplemented "views" atop that. NeWS did have an unnecessarily complex method of delivering events which hurt it. But the designers did admit that perhaps the user could write just as good of a button as they could, and officially exposed the lower level interface.

With the death of NeWS Bill realized that he would have to live with X. The biggest problem with X is the "window manager", which means that the toolkit can no longer control the window borders or drag the window around.

At Digital Domain Bill discovered another toolkit, "Forms". Forms was similar to his work, but provided many more widgets, since it was used in many real applications, rather than as theoretical work. He decided to use Forms, except he integrated his table-driven menus into it. Several very large programs were created using this version of Forms.

The need to switch to OpenGL and GLX, portability, and a desire to use C++ subclassing required a rewrite of Forms. This produced the first version of FLTK. The conversion to C++ required so many changes it made it impossible to recompile any Forms objects. Since it was incompatible anyway, Bill decided to incorporate his older ideas as much as possible by simplifying the lower level interface and the event passing mechanism.

Bill received permission to release it for free on the Internet, with the GNU general public license. Response from Internet users indicated that the Linux market dwarfed the SGI and high-speed GL market, so he rewrote it to use X for all drawing, greatly speeding it up on these machines. That is the version you have now.

Digital Domain has since withdrawn support for FLTK. While Bill is no longer able to actively develop it, he still contributes to FLTK in his free time and is a part of the FLTK development team.

### 3.2 Features

FLTK was designed to be statically linked. This was done by splitting it into many small objects and designing it so that functions that are not used do not have pointers to them in the parts that are used, and thus do not get linked in. This allows you to make an easy-to-install program or to modify FLTK to the

exact requirements of your application without worrying about bloat. FLTK works fine as a shared library, though, and is now included with several Linux distributions.

Here are some of the core features unique to FLTK:

- `sizeof(Fl_Widget) == 64 to 92.`
- The "core" (the "hello" program compiled & linked with a static FLTK library using `gcc` on a 486 and then stripped) is 114K.
- The FLUID program (which includes every widget) is 538k.
- Written directly atop core libraries (Xlib, WIN32 or Carbon) for maximum speed, and carefully optimized for code size and performance.
- Precise low-level compatibility between the X11, WIN32 and MacOS versions - only about 10% of the code is different.
- Interactive user interface builder program. Output is human-readable and editable C++ source code.
- Support for overlay hardware, with emulation if none is available.
- Very small & fast portable 2-D drawing library to hide Xlib, WIN32, or QuickDraw.
- OpenGL/Mesa drawing area widget.
- Support for OpenGL overlay hardware on both X11 and WIN32, with emulation if none is available.
- Text widgets with Emacs key bindings, X cut & paste, and foreign letter compose!
- Compatibility header file for the GLUT library.
- Compatibility header file for the XForms library.

### 3.3 Licensing

FLTK comes with complete free source code. FLTK is available under the terms of the [GNU Library General Public License](#) with exceptions that allow for static linking. Contrary to popular belief, it can be used in commercial software - even Bill Gates could use it!

### 3.4 What Does "FLTK" Mean?

FLTK was originally designed to be compatible with the Forms Library written for SGI machines. In that library all the functions and structures started with "fl\_". This naming was extended to all new methods and widgets in the C++ library, and this prefix was taken as the name of the library. It is almost impossible to search for "FL" on the Internet, due to the fact that it is also the abbreviation for Florida. After much debating and searching for a new name for the toolkit, which was already in use by several people, Bill came up with "FLTK", including a bogus excuse that it stands for "The Fast Light Toolkit".

### 3.5 Building and Installing FLTK Under UNIX and MacOS X

In most cases you can just type "make". This will run configure with the default of no options and then compile everything.

FLTK uses GNU autoconf to configure itself for your UNIX platform. The main things that the configure script will look for are the X11 and OpenGL (or Mesa) header and library files. If these cannot be found in the standard include/library locations you'll need to define the `CFLAGS`, `CXXFLAGS`, and `LDFLAGS` environment variables. For the Bourne and Korn shells you'd use:

```
CFLAGS=-Iincludedir; export CFLAGS
CXXFLAGS=-Iincludedir; export CXXFLAGS
LDFLAGS=-Llibdir; export LDFLAGS
```

For C shell and tcsh, use:

```
setenv CFLAGS "-Iincludedir"
setenv CXXFLAGS "-Iincludedir"
setenv LDFLAGS "-Llibdir"
```

By default configure will look for a C++ compiler named `CC`, `c++`, `g++`, or `gcc` in that order. To use another compiler you need to set the `CXX` environment variable:

```
CXX=xlc; export CXX
setenv CXX "xlc"
```

The `CC` environment variable can also be used to override the default C compiler (`cc` or `gcc`), which is used for a few FLTK source files.

You can run configure yourself to get the exact setup you need. Type `./configure <options>`, where options are:

#### **-enable-cygwin**

Enable the Cygwin libraries under WIN32

#### **-enable-debug**

Enable debugging code & symbols

#### **-disable-gl**

Disable OpenGL support

#### **-enable-shared**

Enable generation of shared libraries

#### **-enable-threads**

Enable multithreading support

#### **-enable-xdbe**

Enable the X double-buffer extension

**-enable-xft**

Enable the Xft library for anti-aliased fonts under X11

**-bindir=/path**

Set the location for executables [default = \$prefix/bin]

**-datadir=/path**

Set the location for data files. [default = \$prefix/share]

**-libdir=/path**

Set the location for libraries [default = \$prefix/lib]

**-includedir=/path**

Set the location for include files. [default = \$prefix/include]

**-mandir=/path**

Set the location for man pages. [default = \$prefix/man]

**-prefix=dir**

Set the directory prefix for files [default = /usr/local]

When the configure script is done you can just run the "make" command. This will build the library, FLUID tool, and all of the test programs.

To install the library, become root and type "make install". This will copy the "fluid" executable to "bindir", the header files to "includedir", and the library files to "libdir".

## 3.6 Building FLTK Under Microsoft Windows

There are three ways to build FLTK under Microsoft Windows. The first is to use the Visual C++ 5.0 project files under the "visualc" directory. Just open (or double-click on) the "fltk.dsw" file to get the whole shebang.

The second method is to use the `configure` script included with the FLTK software; this has only been tested with the CygWin tools:

```
sh configure --prefix=C:/FLTK  
make
```

The final method is to use a GNU-based development tool with the files in the "makefiles" directory. To build using one of these tools simply copy the appropriate makeinclude and config files to the main directory and do a make:

```
copy makefiles\Makefile.<env> Makefile  
make
```

### 3.6.1 Using the Visual C++ DLL Library

The "fltkdll.dsp" project file builds a DLL-version of the FLTK library. Because of name mangling differences between PC compilers (even between different versions of Visual C++!) you can only use the DLL that is generated with the same version compiler that you built it with.

When compiling an application or DLL that uses the FLTK DLL, you will need to define the `FL_DLL` preprocessor symbol to get the correct linkage commands embedded within the FLTK header files.

## 3.7 Building FLTK Under OS/2

The current OS/2 build requires XFree86 for OS/2 to work. A native Presentation Manager version has not been implemented yet (volunteers are welcome!).

The current set of Makefiles/configuration files assumes that EMX 0.9d and libExt (from [posix2.sourceforge.net](#)) is installed.

To build the XFree86 version of FLTK for OS/2, copy the appropriate makeinclude and config files to the main directory and do a make:

```
copy makefiles\Makefile.os2x Makefile  
make
```

## 3.8 Internet Resources

FLTK is available on the 'net in a bunch of locations:

### WWW

<http://www.fltk.org/>  
<http://www.fltk.org/str.php> [for reporting bugs]  
<http://www.fltk.org/software.php> [source code]

### FTP

California, USA ([ftp.fltk.org](ftp://ftp.fltk.org))  
Maryland, USA ([ftp2.fltk.org](ftp://ftp2.fltk.org))  
Espoo, Finland ([ftp.funet.fi](ftp://ftp.funet.fi))  
Germany ([linux.mathematik.tu-darmstadt.de](ftp://linux.mathematik.tu-darmstadt.de))  
Austria ([gd.tuwien.ac.at](ftp://gd.tuwien.ac.at))

### EMail

[fltk@fltk.org](mailto:fltk@fltk.org) [see instructions below]  
[fltk-bugs@fltk.org](mailto:fltk-bugs@fltk.org) [for reporting bugs]

### NNTP Newsgroups

[news.easysw.com](http://news.easysw.com)

To send a message to the FLTK mailing list ("fltk@fltk.org") you must first join the list. Non-member submissions are blocked to avoid problems with unsolicited email.

To join the FLTK mailing list, send a message to "majordomo@fltk.org" with "subscribe fltk" in the message body. A digest of this list is available by subscribing to the "fltk-digest" mailing list.

## **3.9 Reporting Bugs**

To report a bug in FLTK, send an email to "fltk-bugs@fltk.org". Please include the FLTK version, operating system & version, and compiler that you are using when describing the bug or problem. We will be unable to provide any kind of help without that basic information.

Bugs can also be reported to the "fltk.bugs" newsgroup or on the SourceForge bug tracker pages.

For general support and questions, please use the FLTK mailing list at "fltk@fltk.org" or one of the newsgroups.



## **Chapter 4**

### **2 - FLTK Basics**

This chapter teaches you the basics of compiling programs that use FLTK.

## 4.1 Writing Your First FLTK Program

All programs must include the file <FL/F1.H>. In addition the program must include a header file for each FLTK class it uses. Listing 1 shows a simple "Hello, World!" program that uses FLTK to display the window.

**Listing 1 - "hello.cxx"**

```
#include <FL/F1.H>
#include <FL/Fl_Window.H>
#include <FL/Fl_Box.H>

int main(int argc, char **argv) {
    Fl_Window *window = new Fl_Window(300,180);
    Fl_Box *box = new Fl_Box(20,40,260,100,"Hello, World!");
    box->box(Fl_UP_BOX);
    box->labelsize(36);
    box->labelfont(Fl_BOLD+Fl_ITALIC);
    box->labeltype(Fl_SHADOW_LABEL);
    window->end();
    window->show(argc, argv);
    return Fl::run();
}
```

After including the required header files, the program then creates a window. All following widgets will automatically be children of this window.

```
Fl_Window *window = new Fl_Window(300,180);
```

Then we create a box with the "Hello, World!" string in it. FLTK automatically adds the new box to `window`, the current grouping widget.

```
Fl_Box *box = new Fl_Box(20,40,260,100,"Hello, World!");
```

Next, we set the type of box and the size, font, and style of the label:

```
box->box(Fl_UP_BOX);
box->labelsize(36);
box->labelfont(Fl_BOLD+Fl_ITALIC);
box->labeltype(Fl_SHADOW_LABEL);
```

We tell FLTK that we will not add any more widgets to `window`.

```
window->end();
```

Finally, we show the window and enter the FLTK event loop:

```
window->show(argc, argv);
return Fl::run();
```

The resulting program will display the window in Figure 2-1. You can quit the program by closing the window or pressing the ESCape key.

### 4.1.1 Creating the Widgets

The widgets are created using the C++ `new` operator. For most widgets the arguments to the constructor are:

```
Fl_Widget(x, y, width, height, label)
```

The `x` and `y` parameters determine where the widget or window is placed on the screen. In FLTK the top left corner of the window or screen is the origin (i.e. `x = 0, y = 0`) and the units are in pixels.

The `width` and `height` parameters determine the size of the widget or window in pixels. The maximum widget size is typically governed by the underlying window system or hardware.

`label` is a pointer to a character string to label the widget with or `NULL`. If not specified the label defaults to `NULL`. The label string must be in static storage such as a string constant because FLTK does not make a copy of it - it just uses the pointer.

### 4.1.2 Creating Widget hierarchies

Widgets are commonly ordered into functional groups, which in turn may be grouped again, creating a hierarchy of widgets. FLTK makes it easy to fill groups by automatically adding all widgets that are created between a `myGroup->begin()` and `myGroup->end()`. In this example, `myGroup` would be the *current* group.

Newly created groups and their derived widgets implicitly call `begin()` in the constructor, effectively adding all subsequently created widgets to itself until `end()` is called.

Setting the current group to `NULL` will stop automatic hierarchies. New widgets can now be added manually using `Fl_Group::add(...)` and `Fl_Group::insert(...)`.

### 4.1.3 Get/Set Methods

`box->box(FL_UP_BOX)` sets the type of box the `Fl_Box` draws, changing it from the default of `FL_NO_BOX`, which means that no box is drawn. In our "Hello, World!" example we use `FL_UP_BOX`, which means that a raised button border will be drawn around the widget. You can learn more about boxtypes in [Chapter 3](#).

You could examine the boxtyle in by doing `box->box()`. FLTK uses method name overloading to make short names for get/set methods. A "set" method is always of the form "void name(type)", and a "get" method is always of the form "type name() const".

### 4.1.4 Redrawing After Changing Attributes

Almost all of the set/get pairs are very fast, short inline functions and thus very efficient. However, the "set" methods do not call `redraw()` - you have to call it yourself. This greatly reduces code size and execution time. The only common exceptions are `value()` which calls `redraw()` and `label()` which calls `redraw_label()` if necessary.

### 4.1.5 Labels

All widgets support labels. In the case of window widgets, the label is used for the label in the title bar. Our example program calls the `labelfont()`, `labelsize`, and `labeltype()` methods.

All widgets support labels. In the case of window widgets, the label is used for the label in the title bar. Our example program calls the `labelfont`, `labelsize`, and `labeltype` methods.

The `labelfont` method sets the typeface and style that is used for the label, which for this example we are using `FL_BOLD` and `FL_ITALIC`. You can also specify typefaces directly.

The `labelsize` method sets the height of the font in pixels.

The `labeltype` method sets the type of label. FLTK supports normal, embossed, and shadowed labels internally, and more types can be added as desired.

A complete list of all label options can be found in [Chapter 3](#).

#### 4.1.6 Showing the Window

The `show()` method shows the widget or window. For windows you can also provide the command-line arguments to allow users to customize the appearance, size, and position of your windows.

#### 4.1.7 The Main Event Loop

All FLTK applications (and most GUI applications in general) are based on a simple event processing model. User actions such as mouse movement, button clicks, and keyboard activity generate events that are sent to an application. The application may then ignore the events or respond to the user, typically by redrawing a button in the "down" position, adding the text to an input field, and so forth.

FLTK also supports idle, timer, and file pseudo-events that cause a function to be called when they occur. Idle functions are called when no user input is present and no timers or files need to be handled - in short, when the application is not doing anything. Idle callbacks are often used to update a 3D display or do other background processing.

Timer functions are called after a specific amount of time has expired. They can be used to pop up a progress dialog after a certain amount of time or do other things that need to happen at more-or-less regular intervals. FLTK timers are not 100% accurate, so they should not be used to measure time intervals, for example.

File functions are called when data is ready to read or write, or when an error condition occurs on a file. They are most often used to monitor network connections (sockets) for data-driven displays.

FLTK applications must periodically check (`Fl::check()`) or wait (`Fl::wait()`) for events or use the `Fl::run()` method to enter a standard event processing loop. Calling `Fl::run()` is equivalent to the following code:

```
while (Fl::wait());
```

`Fl::run()` does not return until all of the windows under FLTK control are closed by the user or your program.

## 4.2 Compiling Programs with Standard Compilers

Under UNIX (and under Microsoft Windows when using the GNU development tools) you will probably need to tell the compiler where to find the header files. This is usually done using the `-I` option:

```
CC -I/usr/local/include ...
gcc -I/usr/local/include ...
```

The `fltk-config` script included with FLTK can be used to get the options that are required by your compiler:

```
CC `fltk-config --cxxflags` ...
```

Similarly, when linking your application you will need to tell the compiler to use the FLTK library:

```
CC ... -L/usr/local/lib -lfltk -lXext -lX11 -lm  
gcc ... -L/usr/local/lib -lfltk -lXext -lX11 -lm
```

Aside from the "fltk" library, there is also a "fltk\_forms" library for the XForms compatibility classes, "fltk\_gl" for the OpenGL and GLUT classes, and "fltk\_images" for the image file classes, [Fl\\_Help\\_Dialog](#) widget, and system icon support.

**Note:**

The libraries are named "fltk.lib", "fltkgl.lib", "fltkforms.lib", and "fltkimages.lib", respectively under Windows.

As before, the `fltk-config` script included with FLTK can be used to get the options that are required by your linker:

```
CC ... `fltk-config --ldflags`
```

The forms, GL, and images libraries are included with the "`-use-foo`" options, as follows:

```
CC ... `fltk-config --use-forms --ldflags`  
CC ... `fltk-config --use-gl --ldflags`  
CC ... `fltk-config --use-images --ldflags`  
CC ... `fltk-config --use-forms --use-gl --use-images --ldflags`
```

Finally, you can use the `fltk-config` script to compile a single source file as a FLTK program:

```
fltk-config --compile filename.cpp  
fltk-config --use-forms --compile filename.cpp  
fltk-config --use-gl --compile filename.cpp  
fltk-config --use-images --compile filename.cpp  
fltk-config --use-forms --use-gl --use-images --compile filename.cpp
```

Any of these will create an executable named `filename`.

## 4.3 Compiling Programs with Microsoft Visual C++

In Visual C++ you will need to tell the compiler where to find the FLTK header files. This can be done by selecting "Settings" from the "Project" menu and then changing the "Preprocessor" settings under the "C/C++" tab. You will also need to add the FLTK and WinSock2 (WS2\_32.LIB) libraries to the "Link" settings.

You can build your Microsoft Windows applications as Console or WIN32 applications. If you want to use the standard C `main()` function as the entry point, FLTK includes a `WinMain()` function that will call your `main()` function for you.

*Note: The Visual C++ 5.0 optimizer is known to cause problems with many programs. We only recommend using the "Favor Small Code" optimization setting.* The Visual C++ 6.0 optimizer seems to be much better and can be used with the "optimized for speed" setting.

## 4.4 Naming

All public symbols in FLTK start with the characters 'F' and 'L':

- Functions are either `F1::foo()` or `f1_foo()`.
- Class and type names are capitalized: `F1_Foo`.
- `Constants and enumerations` are uppercase: `FL_FOO`.
- All header files start with `<FL/...>`.

## 4.5 Header Files

The proper way to include FLTK header files is:

```
#include <FL/F1_xyz.H>
```

**Note:**

Case *is* significant on many operating systems, and the C standard uses the forward slash (/) to separate directories. *Do not use any of the following include lines:*

```
#include <FL\F1_xyz.H>
#include <f1/f1_xyz.h>
#include <F1/f1_xyz.h>
```

## **Chapter 5**

### **3 - Common Widgets and Attributes**

This chapter describes many of the widgets that are provided with FLTK and covers how to query and set the standard attributes.

## 5.1 Buttons

FLTK provides many types of buttons:

- [Fl\\_Button](#) - A standard push button.
- [Fl\\_Check\\_Button](#) - A button with a check box.
- [Fl\\_Light\\_Button](#) - A push button with a light.
- [Fl\\_Repeat\\_Button](#) - A push button that repeats when held.
- [Fl\\_Return\\_Button](#) - A push button that is activated by the `Enter` key.
- [Fl\\_Round\\_Button](#) - A button with a radio circle.

All of these buttons just need the corresponding `<FL/Fl_xyz_Button.h>` header file. The constructor takes the bounding box of the button and optionally a label string:

```
Fl_Button *button = new Fl_Button(x, y, width, height, "label");
Fl_Light_Button *lbutton = new Fl_Light_Button(x, y, width, height);
Fl_Round_Button *rbutton = new Fl_Round_Button(x, y, width, height, "label");
```

Each button has an associated `type()` which allows it to behave as a push button, toggle button, or radio button:

```
button->type(FL_NORMAL_BUTTON);
lbutton->type(FL_TOGGLE_BUTTON);
rbutton->type(FL_RADIO_BUTTON);
```

For toggle and radio buttons, the `value()` method returns the current button state (0 = off, 1 = on). The `set()` and `clear()` methods can be used on toggle buttons to turn a toggle button on or off, respectively. Radio buttons can be turned on with the `setonly()` method; this will also turn off other radio buttons in the same group.

## 5.2 Text

FLTK provides several text widgets for displaying and receiving text:

- [Fl\\_Input](#) - A one-line text input field.
- [Fl\\_Output](#) - A one-line text output field.
- [Fl\\_Multiline\\_Input](#) - A multi-line text input field.

- [Fl\\_Multiline\\_Output](#) - A multi-line text output field.
- [Fl\\_Text\\_Display](#) - A multi-line text display widget.
- [Fl\\_Text\\_Editor](#) - A multi-line text editing widget.
- [Fl\\_Help\\_View](#) - A HTML text display widget.

The [Fl\\_Output](#) and [Fl\\_Multiline\\_Output](#) widgets allow the user to copy text from the output field but not change it.

The `value()` method is used to get or set the string that is displayed:

```
Fl_Input *input = new Fl_Input(x, y, width, height, "label");
input->value("Now is the time for all good men...");
```

The string is copied to the widget's own storage when you set the `value()` of the widget.

The [Fl\\_Text\\_Display](#) and [Fl\\_Text\\_Editor](#) widgets use an associated [Fl\\_Text\\_Buffer](#) class for the value, instead of a simple string.

## 5.3 Valuators

Unlike text widgets, valuators keep track of numbers instead of strings. FLTK provides the following valuators:

- [Fl\\_Counter](#) - A widget with arrow buttons that shows the current value.
- [Fl\\_Dial](#) - A round knob.
- [Fl\\_Roller](#) - An SGI-like dolly widget.
- [Fl\\_Scrollbar](#) - A standard scrollbar widget.
- [Fl\\_Slider](#) - A scrollbar with a knob.
- [Fl\\_Value\\_Slider](#) - A slider that shows the current value.

The `value()` method gets and sets the current value of the widget. The `minimum()` and `maximum()` methods set the range of values that are reported by the widget.

## 5.4 Groups

The [Fl\\_Group](#) widget class is used as a general purpose "container" widget. Besides grouping radio buttons, the groups are used to encapsulate windows, tabs, and scrolled windows. The following group classes are available with FLTK:

- [Fl\\_Double\\_Window](#) - A double-buffered window on the screen.

- [Fl\\_Gl\\_Window](#) - An OpenGL window on the screen.
- [Fl\\_Group](#) - The base container class; can be used to group any widgets together.
- [Fl\\_Pack](#) - A collection of widgets that are packed into the group area.
- [Fl\\_Scroll](#) - A scrolled window area.
- [Fl\\_Tabs](#) - Displays child widgets as tabs.
- [Fl\\_Tile](#) - A tiled window area.
- [Fl\\_Window](#) - A window on the screen.
- [Fl\\_Wizard](#) - Displays one group of widgets at a time.

## 5.5 Setting the Size and Position of Widgets

The size and position of widgets is usually set when you create them. You can access them with the `x()`, `y()`, `w()`, and `h()` methods.

You can change the size and position by using the `position()`, `resize()`, and `size()` methods:

```
button->position(x, y);
group->resize(x, y, width, height);
window->size(width, height);
```

If you change a widget's size or position after it is displayed you will have to call `redraw()` on the widget's parent.

## 5.6 Colors

FLTK stores the colors of widgets as an 32-bit unsigned number that is either an index into a color palette of 256 colors or a 24-bit RGB color. The color palette is *not* the X or WIN32 colormap, but instead is an internal table with fixed contents.

There are symbols for naming some of the more common colors:

- `FL_BLACK`
- `FL_RED`
- `FL_GREEN`
- `FL_YELLOW`
- `FL_BLUE`
- `FL_MAGENTA`

- FL\_CYAN
- FL\_WHITE
- FL\_BLACK

These symbols are the default colors for all FLTK widgets. They are explained in more detail in the chapter [Enumerations](#)

- FL\_FOREGROUND\_COLOR
- FL\_BACKGROUND\_COLOR
- FL\_INACTIVE\_COLOR
- FL\_SELECTION\_COLOR

RGB colors can be set using the `fl_rgb_color()` function:

```
Fl_Color c = fl_rgb_color(85, 170, 255);
```

The widget color is set using the `color()` method:

```
button->color(Fl_RED);
```

Similarly, the label color is set using the `labelcolor()` method:

```
button->labelcolor(Fl_WHITE);
```

## 5.7 Box Types

The type `Fl_Boxtype` stored and returned in `Fl_Widget::box()` is an enumeration defined in [Enumerations.H](#).

Figure 3-3 shows the standard box types included with FLTK.

`FL_NO_BOX` means nothing is drawn at all, so whatever is already on the screen remains. The `FL_..._FRAME` types only draw their edges, leaving the interior unchanged. The blue color in Figure 3-3 is the area that is not drawn by the frame types.

### 5.7.1 Box Types

You can define your own boxtypes by making a small function that draws the box and adding it to the table of boxtypes.

<b>Note:</b>
This interface has changed in FLTK 2.0!

## The Drawing Function

The drawing function is passed the bounding box and background color for the widget:

```
void xyz_draw(int x, int y, int w, int h, Fl_Color c) {
...
}
```

A simple drawing function might fill a rectangle with the given color and then draw a black outline:

```
void xyz_draw(int x, int y, int w, int h, Fl_Color c) {
    fl_color(c);
    fl_rectf(x, y, w, h);
    fl_color(FL_BLACK);
    fl_rect(x, y, w, h);
}
```

### **Fl\_Boxtype fl\_down(Fl\_Boxtype)**

`fl_down` returns the "pressed" or "down" version of a box. If no "down" version of a given box exists, the behavior of this function is undefined and some random box or frame is returned. See also: [fl\\_frame drawing](#).

### **Fl\_Boxtype fl\_frame(Fl\_Boxtype)**

`fl_frame` returns the unfilled, frame-only version of a box. If no frame version of a given box exists, the behavior of this function is undefined and some random box or frame is returned. See also: [fl\\_frame drawing](#).

### **Fl\_Boxtype fl\_box(Fl\_Boxtype)**

`fl_box` returns the filled version of a frame. If no filled version of a given frame exists, the behavior of this function is undefined and some random box or frame is returned. See also: [fl\\_frame](#).

## Adding Your Box Type

The `Fl::set_boxtype()` method adds or replaces the specified box type:

```
#define XYZ_BOX FL_FREE_BOXTYPE

Fl::set_boxtype(XYZ_BOX, xyz_draw, 1, 1, 2, 2);
```

The last 4 arguments to `Fl::set_boxtype()` are the offsets for the x, y, width, and height values that should be subtracted when drawing the label inside the box.

A complete box design contains four box types in this order: a filled, neutral box (`UP_BOX`), a filled, depressed box (`DOWN_BOX`), and the same as outlines only (`UP_FRAME` and `DOWN_FRAME`). The function `fl_down(Fl_Boxtype)` expects the neutral design on a boxtyle with a numerical value evenly divideable by two. `fl_frame(Fl_Boxtype)` expects the `UP_BOX` design at a value divideable by four.

## 5.8 Labels and Label Types

The `label()`, `align()`, `labelfont()`, `labelsize()`, `labeltype()`, `image()`, and `deimage()` methods control the labeling of widgets.

### **label()**

The `label()` method sets the string that is displayed for the label. Symbols can be included with the label string by escaping them using the "@" symbol - "@@" displays a single at sign. Figure 3-4 shows the available symbols.

The @ sign may also be followed by the following optional "formatting" characters, in this order:

- '#' forces square scaling, rather than distortion to the widget's shape.
- +[1-9] or -[1-9] tweaks the scaling a little bigger or smaller.
- '\$' flips the symbol horizontally, " flips it vertically.
- [0-9] - rotates by a multiple of 45 degrees. '5' and '6' do no rotation while the others point in the direction of that key on a numeric keypad. '0', followed by four more digits rotates the symbol by that amount in degrees.

Thus, to show a very large arrow pointing downward you would use the label string "@+92 →".

### **align()**

The `align()` method positions the label. The following constants are defined and may be OR'd together as needed:

- `FL_ALIGN_CENTER` - center the label in the widget.
- `FL_ALIGN_TOP` - align the label at the top of the widget.
- `FL_ALIGN_BOTTOM` - align the label at the bottom of the widget.
- `FL_ALIGN_LEFT` - align the label to the left of the widget.
- `FL_ALIGN_RIGHT` - align the label to the right of the widget.
- `FL_ALIGN_INSIDE` - align the label inside the widget.
- `FL_ALIGN_CLIP` - clip the label to the widget's bounding box.
- `FL_ALIGN_WRAP` - wrap the label text as needed.
- `FL_TEXT_OVER_IMAGE` - show the label text over the image.

- `FL_IMAGE_OVER_TEXT` - show the label image over the text (default).

### **labeltype()**

The `labeltype()` method sets the type of the label. The following standard label types are included:

- `FL_NORMAL_LABEL` - draws the text.
- `FL_NO_LABEL` - does nothing.
- `FL_SHADOW_LABEL` - draws a drop shadow under the text.
- `FL_ENGRAVED_LABEL` - draws edges as though the text is engraved.
- `FL_EMBOSS_LABEL` - draws edges as thought the text is raised.
- `FL_ICON_LABEL` - draws the icon associated with the text.

### **image() and deimage()**

The `image()` and `deimage()` methods set an image that will be displayed with the widget. The `deimage()` method sets the image that is shown when the widget is inactive, while the `image()` method sets the image that is shown when the widget is active.

To make an image you use a subclass of `F1_Image`.

### **Making Your Own Label Types**

Label types are actually indexes into a table of functions that draw them. The primary purpose of this is to use this to draw the labels in ways inaccessible through the `f1_font` mechanism (e.g. `FL_ENGRAVED_LABEL`) or with program-generated letters or symbology.

<b>Note:</b>
This interface has changed in FLTK 2.0!

### **Label Type Functions**

To setup your own label type you will need to write two functions: one to draw and one to measure the label. The draw function is called with a pointer to a `F1_Label` structure containing the label information, the bounding box for the label, and the label alignment:

```
void xyz_draw(const F1_Label *label, int x, int y, int w, int h, F1_Align align) {  
    ...  
}
```

The label should be drawn *inside* this bounding box, even if `FL_ALIGN_INSIDE` is not enabled. The function is not called if the label value is `NULL`.

The measure function is called with a pointer to a `Fl_Label` structure and references to the width and height:

```
void xyz_measure(const Fl_Label *label, int &w, int &h) {
...
}
```

The function should measure the size of the label and set `w` and `h` to the size it will occupy.

### Adding Your Label Type

The `Fl::set_labeltype` method creates a label type using your draw and measure functions:

```
#define XYZ_LABEL FL_FREELABELTYPE
Fl::set_labeltype(XYZ_LABEL, xyz_draw, xyz_measure);
```

The label type number `n` can be any integer value starting at the constant `FL_FREELABELTYPE`. Once you have added the label type you can use the `labeltype()` method to select your label type.

The `Fl::set_labeltype` method can also be used to overload an existing label type such as `FL_NORMAL_LABEL`.

### Making your own symbols

It is also possible to define your own drawings and add them to the symbol list, so they can be rendered as part of any label.

To create a new symbol, you implement a drawing function `void drawit(Fl_Color c)` which typically uses the `complex drawing functions` to generate a vector shape inside a two-by-two units sized box around the origin. This function is then linked into the symbols table using `fl_add_symbol`:

```
int fl_add_symbol(const char *name, void (*drawit)(Fl_Color), int scalable)
```

`name` is the name of the symbol without the "@"; `scalable` must be set to 1 if the symbol is generated using scalable vector drawing functions.

```
int fl_draw_symbol(const char *name, int x, int y, int w, int h, Fl_Color col)
```

This function draws a named symbol fitting the given rectangle.

## 5.9 Callbacks

Callbacks are functions that are called when the value of a widget changes. A callback function is sent a `Fl_Widget` pointer of the widget that changed and a pointer to data that you provide:

```
void xyz_callback(Fl_Widget *w, void *data) {
...
}
```

The `callback()` method sets the callback function for a widget. You can optionally pass a pointer to some data needed for the callback:

```
int xyz_data;

button->callback(xyz_callback, &xyz_data);
```

Normally callbacks are performed only when the value of the widget changes. You can change this using the [Fl\\_Widget::when\(\)](#) method:

```
button->when(Fl_WHEN_NEVER);
button->when(Fl_WHEN_CHANGED);
button->when(Fl_WHEN_RELEASE);
button->when(Fl_WHEN_RELEASE_ALWAYS);
button->when(Fl_WHEN_ENTER_KEY);
button->when(Fl_WHEN_ENTER_KEY_ALWAYS);
button->when(Fl_WHEN_CHANGED | Fl_WHEN_NOT_CHANGED);
```

**Note:**

You cannot delete a widget inside a callback, as the widget may still be accessed by FLTK after your callback is completed. Instead, use the [Fl::delete\\_widget\(\)](#) method to mark your widget for deletion when it is safe to do so.

**Hint:**

Many programmers new to FLTK or C++ try to use a non-static class method instead of a static class method or function for their callback. Since callbacks are done outside a C++ class, the `this` pointer is not initialized for class methods.

To work around this problem, define a static method in your class that accepts a pointer to the class, and then have the static method call the class method(s) as needed. The data pointer you provide to the `callback()` method of the widget can be a pointer to the instance of your class.

```
class Foo {
    void my_callback(Fl_Widget *w);
    static void my_static_callback(Fl_Widget *w, void *f) { ((Foo *)f)->my_callback(w); }
    ...
}
...
w->callback(my_static_callback, (void *)this);
```

## 5.10 Shortcuts

Shortcuts are key sequences that activate widgets such as buttons or menu items. The `shortcut()` method sets the shortcut for a widget:

```
button->shortcut(Fl_Enter);
button->shortcut(Fl_SHIFT + 'b');
button->shortcut(Fl_CTRL + 'b');
button->shortcut(Fl_ALT + 'b');
button->shortcut(Fl_CTRL + Fl_ALT + 'b');
button->shortcut(0); // no shortcut
```

The shortcut value is the key event value - the ASCII value or one of the special keys like [Fl\\_Enter](#) - combined with any modifiers like Shift, Alt, and Control.

## **Chapter 6**

### **5 - Drawing Things in FLTK**

This chapter covers the drawing functions that are provided with FLTK.

## 6.1 When Can You Draw Things in FLTK?

There are only certain places you can execute drawing code in FLTK. Calling these functions at other places will result in undefined behavior!

- The most common place is inside the virtual `Fl_Widget::draw()` method. To write code here, you must subclass one of the existing `Fl_Widget` classes and implement your own version of `draw()`.
- The most common place is inside the virtual method `Fl_Widget::draw()`. To write code here, you must subclass one of the existing `Fl_Widget` classes and implement your own version of `draw()`.
- You can also write `boxtypes` and `labeltypes`. These are small procedures that can be called by existing `Fl_Widget::draw()` methods. These "types" are identified by an 8-bit index that is stored in the widget's `box()`, `labeltype()`, and possibly other properties.
- You can call `Fl_Window::make_current()` to do incremental update of a widget. Use `Fl_Widget::window()` to find the window.

## 6.2 Drawing Functions

To use the drawing functions you must first include the `<FL/fl_draw.H>` header file. FLTK provides the following types of drawing functions:

- [Boxes](#)
- [Clipping](#)
- [Colors](#)
- [Line Dashes and Thickness](#)
- [Drawing Fast Shapes](#)
- [Drawing Complex Shapes](#)
- [Drawing Text](#)
- [Image Classes](#)
- [Drawing Overlays](#)
- [Offscreen Drawing](#)

### 6.2.1 Boxes

FLTK provides three functions that can be used to draw boxes for buttons and other UI controls. Each function uses the supplied upper-lefthand corner and width and height to determine where to draw the box.

```
void fl_draw_box(Fl_Boxtype b, int x, int y, int w, int h, Fl_Color c);
```

The first box drawing function is `fl_draw_box()` which draws a standard boxtyle *b* in the specified color *c*.

```
void fl_frame(const char *s, int x, int y, int w, int h)
```

The `fl_frame()` function draws a series of line segments around the given box. The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: top, left, bottom, right. The results of calling `fl_frame()` with a string that is not a multiple of 4 characters in length are undefined.

The only difference between this function and `fl_frame2()` is the order of the line segments.

See also: `fl_frame boxtype`.

```
void fl_frame2(const char *s, int x, int y, int w, int h);
```

The `fl_frame2()` function draws a series of line segments around the given box. The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: bottom, right, top, left. The results of calling `fl_frame2()` with a string that is not a multiple of 4 characters in length are undefined.

The only difference between this function and `fl_frame()` is the order of the line segments.

### 6.2.2 Clipping

You can limit all your drawing to a rectangular region by calling `fl_push_clip()`, and put the drawings back by using `fl_pop_clip()`. This rectangle is measured in pixels and is unaffected by the current transformation matrix.

In addition, the system may provide clipping when updating windows which may be more complex than a simple rectangle.

```
void fl_clip(int x, int y, int w, int h)
```

```
void fl_push_clip(int x, int y, int w, int h)
```

Intersect the current clip region with a rectangle and push this new region onto the stack. The `fl_clip()` name is deprecated and will be removed from future releases.

```
void fl_push_no_clip()
```

Pushes an empty clip region on the stack so nothing will be clipped.

```
void fl_pop_clip()
```

Restore the previous clip region.

**Note:** You must call `fl_pop_clip()` once for every time you call `fl_push_clip()`. If you return to FLTK with the clip stack not empty unpredictable results occur.

```
int fl_not_clipped(int x, int y, int w, int h)
```

Returns non-zero if any of the rectangle intersects the current clip region. If this returns 0 you don't have to draw the object.

**Note:** Under X this returns 2 if the rectangle is partially clipped, and 1 if it is entirely inside the clip region.

```
int fl_clip_box(int x, int y, int w, int h, int &X, int &Y, int &W, int &H)
```

Intersect the rectangle `x, y, w, h` with the current clip region and returns the bounding box of the result in `X, Y, W, H`. Returns non-zero if the resulting rectangle is different than the original. This can be used to limit the necessary drawing to a rectangle. `W` and `H` are set to zero if the rectangle is completely outside the region.

```
void fl_clip_region(Fl_Region r)
Fl_Region fl_clip_region()
```

Replace the top of the clip stack with a clipping region of any shape. `Fl_Region` is an operating system specific type. The second form returns the current clipping region.

## 6.3 Colors

FLTK manages colors as 32-bit unsigned integers. Values from 0 to 255 represent colors from the FLTK 1.0.x standard colormap and are allocated as needed on screens without TrueColor support. The `Fl_Color` enumeration type defines the standard colors and color cube for the first 256 colors. All of these are named with symbols in `<FL/Enumerations.H>`.

Color values greater than 255 are treated as 24-bit RGB values. These are mapped to the closest color supported by the screen, either from one of the 256 colors in the FLTK 1.0.x colormap or a direct RGB value on TrueColor screens. You can generate 24-bit RGB color values using the `fl_rgb_color()` function.

```
void fl_color(Fl_Color)
```

Sets the color for all subsequent drawing operations.

For colormapped displays, a color cell will be allocated out of `fl_colormap` the first time you use a color. If the colormap fills up then a least-squares algorithm is used to find the closest color.

`Fl_Color fl_color()`

Returns the last `fl_color()` that was set. This can be used for state save/restore.

`void fl_color(uchar r, uchar g, uchar b)`

Set the color for all subsequent drawing operations. The closest possible match to the RGB color is used. The RGB color is used directly on TrueColor displays. For colormap visuals the nearest index in the gray ramp or color cube is used.

### 6.3.1 Line Dashes and Thickness

FLTK supports drawing of lines with different styles and widths. Full functionality is not available under Windows 95, 98, and Me due to the reduced drawing functionality these operating systems provide.

`void fl_line_style(int style, int width=0, char* dashes=0)`

Set how to draw lines (the "pen"). If you change this it is your responsibility to set it back to the default with `fl_line_style(0)`.

**Note:** Because of how line styles are implemented on WIN32 systems, you *must* set the line style *after* setting the drawing color. If you set the color after the line style you will lose the line style settings!

`style` is a bitmask which is a bitwise-OR of the following values. If you don't specify a dash type you will get a solid line. If you don't specify a cap or join type you will get a system-defined default of whatever value is fastest.

- `FL_SOLID` -----
- `FL_DASH` - - - -
- `FL_DOT` . . . . .
- `FL_DASHDOT` - . - .
- `FL_DASHDOTDOT` - .. -
- `FL_CAP_FLAT`
- `FL_CAP_ROUND`
- `FL_CAP_SQUARE` (extends past end point 1/2 line width)
- `FL_JOIN_MITER` (pointed)

- `FL_JOIN_ROUND`
- `FL_JOIN_BEVEL (flat)`

`width` is the number of pixels thick to draw the lines. Zero results in the system-defined default, which on both X and Windows is somewhat different and nicer than 1.

`dashes` is a pointer to an array of dash lengths, measured in pixels. The first location is how long to draw a solid portion, the next is how long to draw the gap, then the solid, etc. It is terminated with a zero-length entry. A NULL pointer or a zero-length array results in a solid line. Odd array sizes are not supported and result in undefined behavior.

**Note:**

The dashes array does not work under Windows 95, 98, or Me, since those operating systems do not support complex line styles.

### 6.3.2 Drawing Fast Shapes

These functions are used to draw almost all the FLTK widgets. They draw on exact pixel boundaries and are as fast as possible. Their behavior is duplicated exactly on all platforms FLTK is ported. It is undefined whether these are affected by the `transformation matrix`, so you should only call these while the matrix is set to the identity matrix (the default).

`void fl_point(int x, int y)`

Draw a single pixel at the given coordinates.

`void fl_rectf(int x, int y, int w, int h)`

`void fl_rectf(int x, int y, int w, int h)`

Color a rectangle that exactly fills the given bounding box.

`void fl_rectf(int x, int y, int w, int h, uchar r, uchar g, uchar b)`

Color a rectangle with "exactly" the passed `r, g, b` color. On screens with less than 24 bits of color this is done by drawing a solid-colored block using `fl_draw_image()` so that the correct color shade is produced.

`void fl_rect(int x, int y, int w, int h)`

`void fl_rect(int x, int y, int w, int h, Fl_Color c)`

Draw a 1-pixel border *inside* this bounding box.

`void fl_line(int x, int y, int x1, int y1)`

`void fl_line(int x, int y, int x1, int y1, int x2, int y2)`

Draw one or two lines between the given points.

```
void fl_loop(int x, int y, int x1, int y1, int x2, int y2)  
void fl_loop(int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
```

Outline a 3 or 4-sided polygon with lines.

```
void fl_polygon(int x, int y, int x1, int y1, int x2, int y2)  
void fl_polygon(int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
```

Fill a 3 or 4-sided polygon. The polygon must be convex.

```
void fl_xyline(int x, int y, int x1)  
void fl_xyline(int x, int y, int x1, int y2)  
void fl_xyline(int x, int y, int x1, int y2, int x3)
```

Draw horizontal and vertical lines. A horizontal line is drawn first, then a vertical, then a horizontal.

```
void fl_yxline(int x, int y, int y1)  
void fl_yxline(int x, int y, int y1, int x2)  
void fl_yxline(int x, int y, int y1, int x2, int y3)
```

Draw vertical and horizontal lines. A vertical line is drawn first, then a horizontal, then a vertical.

```
void fl_arc(int x, int y, int w, int h, double a1, double a2)  
void fl_pie(int x, int y, int w, int h, double a1, double a2)
```

Draw ellipse sections using integer coordinates. These functions match the rather limited circle drawing code provided by X and WIN32. The advantage over using `fl_arc` with floating point coordinates is that they are faster because they often use the hardware, and they draw much nicer small circles, since the small sizes are often hard-coded bitmaps.

If a complete circle is drawn it will fit inside the passed bounding box. The two angles are measured in degrees counterclockwise from 3'oclock and are the starting and ending angle of the arc, `a2` must be greater or equal to `a1`.

`fl_arc()` draws a series of lines to approximate the arc. Notice that the integer version of `fl_arc()` has a different number of arguments than the `fl_arc()` function described later in this chapter.

`fl_pie()` draws a filled-in pie slice. This slice may extend outside the line drawn by `fl_arc()`; to avoid this use `w = 1` and `h = 1`.

```
void fl_scroll(int X, int Y, int W, int H, int dx, int dy, void (*draw_area)(void*, int,int,int,int), void* data)
```

Scroll a rectangle and draw the newly exposed portions. The contents of the rectangular area is first shifted by `dx` and `dy` pixels. The callback is then called for every newly exposed rectangular area,

### 6.3.3 Drawing Complex Shapes

The complex drawing functions let you draw arbitrary shapes with 2-D linear transformations. The functionality matches that found in the Adobe®PostScript™language. The exact pixels that are filled are less defined than for the fast drawing functions so that FLTK can take advantage of drawing hardware. On both X and WIN32 the transformed vertices are rounded to integers before drawing the line segments: this severely limits the accuracy of these functions for complex graphics, so use OpenGL when greater accuracy and/or performance is required.

```
void fl_push_matrix()
void fl_pop_matrix()
```

Save and restore the current transformation. The maximum depth of the stack is 4.

```
void fl_scale(float x, float y)
void fl_scale(float x)
void fl_translate(float x, float y)
void fl_rotate(float d)
void fl_mult_matrix(float a, float b, float c, float d, float x, float y)
```

Concatenate another transformation onto the current one. The rotation angle is in degrees (not radians) and is counter-clockwise.

```
double fl_transform_x(double x, double y)
double fl_transform_y(double x, double y)
double fl_transform_dx(double x, double y)
double fl_transform_dy(double x, double y)
void fl_transformed_vertex(double xf, double yf)
```

Transform a coordinate or a distance through the current transformation matrix. After transforming a coordinate pair, it can be added to the vertex list without any further translations using `fl_transformed_vertex`.

```
void fl_begin_points()
void fl_end_points()
```

Start and end drawing a list of points. Points are added to the list with `fl_vertex`.

```
void fl_begin_line()
void fl_end_line()
```

Start and end drawing lines.

```
void fl_begin_loop()  
void fl_end_loop()
```

Start and end drawing a closed sequence of lines.

```
void fl_begin_polygon()  
void fl_end_polygon()
```

Start and end drawing a convex filled polygon.

```
void fl_begin_complex_polygon()  
void fl_gap()  
void fl_end_complex_polygon()
```

Start and end drawing a complex filled polygon. This polygon may be concave, may have holes in it, or may be several disconnected pieces. Call `fl_gap()` to separate loops of the path. It is unnecessary but harmless to call `fl_gap()` before the first vertex, after the last one, or several times in a row.

**Note:** For portability, you should only draw polygons that appear the same whether "even/odd" or "non-zero" winding rules are used to fill them. Holes should be drawn in the opposite direction of the outside loop.

`fl_gap()` should only be called between `fl_begin_complex_polygon()` and `fl_end_complex_polygon()`. To outline the polygon, use `fl_begin_loop()` and replace each `fl_gap()` with `fl_end_loop();fl_begin_loop()`.

```
void fl_vertex(float x, float y)
```

Add a single vertex to the current path.

```
void fl_curve(float x, float y, float x1, float y1, float x2, float y2, float x3, float y3)
```

Add a series of points on a Bezier curve to the path. The curve ends (and two of the points) are at `x`, `y` and `x3`, `y3`.

```
void fl_arc(float x, float y, float r, float start, float end)
```

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling `fl_arc()`. `x`, `y` are the center of the circle, and `r` is its radius. `fl_arc()` takes `start` and `end` angles that are measured in degrees counter-clockwise from 3 o'clock. If `end` is less than `start` then it draws the arc in a clockwise direction.

```
void fl_circle(float x, float y, float r)
```

`fl_circle()` is equivalent to `fl_arc(...,0,360)` but may be faster. It must be the *only* thing in the path: if you want a circle as part of a complex polygon you must use `fl_arc()`.

**Note:** `fl_circle()` draws incorrectly if the transformation is both rotated and non-square scaled.

### 6.3.4 Drawing Text

All text is drawn in the `current font`. It is undefined whether this location or the characters are modified by the current transformation.

```
void fl_draw(const char *, int x, int y)
void fl_draw(const char *, int n, int x, int y)
```

Draw a nul-terminated string or an array of n characters starting at the given location. Text is aligned to the left and to the baseline of the font. To align to the bottom, subtract `fl_descent()` from y. To align to the top, subtract `fl_descent()` and add `fl_height()`. This version of `fl_draw` provides direct access to the text drawing function of the underlying OS. It does not apply any special handling to control characters.

```
void fl_draw(const char *, int x, int y, int w, int h, Fl_Align align, Fl_Image *img = 0, int draw_symbols = 1)
```

Fancy string drawing function which is used to draw all the labels. The string is formatted and aligned inside the passed box. Handles '\t' and '\n', expands all other control characters to ^X, and aligns inside or against the edges of the box described by x, y, w and h. See `Fl_Widget::align()` for values for align. The value `FL_ALIGN_INSIDE` is ignored, as this function always prints inside the box.

If `img` is provided and is not `NULL`, the image is drawn above or below the text as specified by the align value.

The `draw_symbols` argument specifies whether or not to look for symbol names starting with the "@" character.

The text length is limited to 1024 caracters per line.

```
void fl_measure(const char *, int &w, int &h, int draw_symbols = 1)
```

Measure how wide and tall the string will be when printed by the `fl_draw(...,align)` function. If the incoming `w` is non-zero it will wrap to that width.

```
int fl_height()
```

Recommended minimum line spacing for the current font. You can also just use the value of `size` passed to `fl_font()`.

```
int fl_descent()
```

Recommended distance above the bottom of a fl\_height() tall box to draw the text at so it looks centered vertically in that box.

```
float fl_width(const char*)
float fl_width(const char*, int n)
float fl_width(uchar)
```

Return the pixel width of a nul-terminated string, a sequence of n characters, or a single character in the current font.

```
const char *fl_shortcut_label(ulong)
```

Unparse a shortcut value as used by [Fl\\_Button](#) or [Fl\\_Menu\\_Item](#) into a human-readable string like "Alt+N". This only works if the shortcut is a character key or a numbered function key. If the shortcut is zero an empty string is returned. The return value points at a static buffer that is overwritten with each call.

### 6.3.5 Fonts

FLTK supports a set of standard fonts based on the Times, Helvetica/Arial, Courier, and Symbol typefaces, as well as custom fonts that your application may load. Each font is accessed by an index into a font table.

Initially only the first 16 faces are filled in. There are symbolic names for them: FL\_HELVETICA, FL\_TIMES, FL\_COURIER, and modifier values FL\_BOLD and FL\_ITALIC which can be added to these, and FL\_SYMBOL and FL\_ZAPF\_DINGBATS. Faces greater than 255 cannot be used in [Fl\\_Widget](#) labels, since [Fl\\_Widget](#) stores the index as a byte.

```
void fl_font(int face, int size)
```

Set the current font, which is then used by the routines described above. You may call this outside a draw context if necessary to call fl\_width(), but on X this will open the display.

The font is identified by a `face` and a `size`. The size of the font is measured in pixels and not "points". Lines should be spaced `size` pixels apart or more.

```
int fl_font()
int fl_size()
```

Returns the face and size set by the most recent call to fl\_font(a,b). This can be used to save/restore the font.

### 6.3.6 Character Encoding

FLTK 1 supports western character sets using the eight bit encoding of the user-selected global code page. For MS Windows and X11, the code page is assumed to be Windows-1252/Latin1, a superset to ISO 8859-1. On Mac OS X, we assume MacRoman.

FLTK provides the functions `fl_latin1_to_local()`, `fl_local_to_latin1()`, `fl_mac_roman_to_local()`, and `fl_local_to_mac_roman()` to convert strings between both encodings. These functions are only required if your source code contains "C"-strings with international characters and if this source will be compiled on multiple platforms.

Assuming that the following source code was written on MS Windows, this example will output the correct label on OS X and X11 as well. Without the conversion call, the label on OS X would read `Fahrvergngen` with a deformed umlaut u ("cedille", html "&cedil;").

```
btn = new Fl_Button(10, 10, 300, 25);
btn->copy_label(fl_latin1_to_local("Fahrvergnügen"));
```

#### Note:

If your application uses characters that are not part of both encodings, or it will be used in areas that commonly use different code pages, you might consider upgrading to FLTK 2 which supports UTF-8 encoding.

#### **Todo**

drawing.dox: I fixed the above encoding problem of these &cedil; and umlaut characters, but this text is obsoleted by FLTK 1.3 with utf-8 encoding, or must be rewritten accordingly: How to use native (e.g. Windows "ANSI", or ISO-8859-x) encoding in embedded strings for labels, error messages and more. Please check this (utf-8) encoding on different OS'es and with different language and font environments.

For more information about character encoding, unicode and utf-8 see chapter [11 - Unicode and utf-8 Support](#).

### 6.3.7 Drawing Overlays

These functions allow you to draw interactive selection rectangles without using the overlay hardware. FLTK will XOR a single rectangle outline over a window.

```
void fl_overlay_rect(int x, int y, int w, int h);
void fl_overlay_clear();
```

`fl_overlay_rect()` draws a selection rectangle, erasing any previous rectangle by XOR'ing it first. `fl_overlay_clear()` will erase the rectangle without drawing a new one.

Using these functions is tricky. You should make a widget with both a `handle()` and `draw()` method. `draw()` should call `fl_overlay_clear()` before doing anything else. Your `handle()` method should call `window()->make_current()` and then `fl_overlay_rect()` after `FL_DRAG` events, and should call `fl_overlay_clear()` after a `FL_RELEASE` event.

## 6.4 Drawing Images

To draw images, you can either do it directly from data in your memory, or you can create a [Fl\\_Image](#) object. The advantage of drawing directly is that it is more intuitive, and it is faster if the image data changes more often than it is redrawn. The advantage of using the object is that FLTK will cache translated forms of the image (on X it uses a server pixmap) and thus redrawing is *much* faster.

### 6.4.1 Direct Image Drawing

The behavior when drawing images when the current transformation matrix is not the identity is not defined, so you should only draw images when the matrix is set to the identity.

```
void fl_draw_image(const uchar *, int X, int Y, int W, int H, int D = 3, int LD = 0)
void fl_draw_image_mono(const uchar *, int X, int Y, int W, int H, int D = 1, int LD = 0)
```

Draw an 8-bit per color RGB or luminance image. The pointer points at the "r" data of the top-left pixel. Color data must be in *r, g, b* order. *X, Y* are where to put the top-left corner. *W* and *H* define the size of the image. *D* is the delta to add to the pointer between pixels, it may be any value greater or equal to 3, or it can be negative to flip the image horizontally. *LD* is the delta to add to the pointer between lines (if 0 is passed it uses *W \* D*), and may be larger than *W \* D* to crop data, or negative to flip the image vertically.

It is highly recommended that you put the following code before the first `show()` of *any* window in your program to get rid of the dithering if possible:

```
Fl::visual(FL_RGB);
```

Gray scale (1-channel) images may be drawn. This is done if `abs(D)` is less than 3, or by calling `fl_draw_image_mono()`. Only one 8-bit sample is used for each pixel, and on screens with different numbers of bits for red, green, and blue only gray colors are used. Setting *D* greater than 1 will let you display one channel of a color image.

**Note:** The X version does not support all possible visuals. If FLTK cannot draw the image in the current visual it will abort. FLTK supports any visual of 8 bits or less, and all common TrueColor visuals up to 32 bits.

```
typedef void (*fl_draw_image_cb)(void *, int x, int y, int w, uchar *)
void fl_draw_image(fl_draw_image_cb, void *, int X, int Y, int W, int H, int D = 3)
void fl_draw_image_mono(fl_draw_image_cb, void *, int X, int Y, int W, int H, int D = 1)
```

Call the passed function to provide each scan line of the image. This lets you generate the image as it is being drawn, or do arbitrary decompression of stored data, provided it can be decompressed to individual scan lines easily.

The callback is called with the `void *` user data pointer which can be used to point at a structure of information about the image, and the *x, y*, and *w* of the scan line desired from the image. 0,0 is the

upper-left corner of the image, *not X, Y*. A pointer to a buffer to put the data into is passed. You must copy *w* pixels from scanline *y*, starting at pixel *x*, to this buffer.

Due to cropping, less than the whole image may be requested. So *x* may be greater than zero, the first *y* may be greater than zero, and *w* may be less than *W*. The buffer is long enough to store the entire *W \* D* pixels, this is for convenience with some decompression schemes where you must decompress the entire line at once: decompress it into the buffer, and then if *x* is not zero, copy the data over so the *x*'th pixel is at the start of the buffer.

You can assume the *y*'s will be consecutive, except the first one may be greater than zero.

If *D* is 4 or more, you must fill in the unused bytes with zero.

```
int fl_draw_pixmap(char **data, int X, int Y, Fl_Color = FL_GRAY)
```

Draws XPM image data, with the top-left corner at the given position. The image is dithered on 8-bit displays so you won't lose color space for programs displaying both images and pixmaps. This function returns zero if there was any error decoding the XPM data.

To use an XPM, do:

```
#include "foo.xpm"
...
fl_draw_pixmap(foo, x, y);
```

Transparent colors are replaced by the optional *Fl\_Color* argument. To draw with true transparency you must use the [Fl\\_Pixmap](#) class.

```
int fl_measure_pixmap(char **data, int &w, int &h)
```

An XPM image contains the dimensions in its data. This function finds and returns the width and height. The return value is non-zero if the dimensions were parsed ok and zero if there was any problem.

### 6.4.2 Direct Image Reading

FLTK provides a single function for reading from the current window or off-screen buffer into a RGB(A) image buffer.

```
uchar *fl_read_image(uchar *p, int X, int Y, int W, int H, int alpha = 0);
```

Read a RGB(A) image from the current window or off-screen buffer. The *p* argument points to a buffer that can hold the image and must be at least *W\*H\*3* bytes when reading RGB images and *W\*H\*4* bytes when reading RGBA images. If NULL, *fl\_read\_image()* will create an array of the proper size which can be freed using *delete []*.

The *alpha* parameter controls whether an alpha channel is created and the value that is placed in the alpha channel. If 0, no alpha channel is generated.

### 6.4.3 Image Classes

FLTK provides a base image class called [Fl\\_Image](#) which supports creating, copying, and drawing images of various kinds, along with some basic color operations. Images can be used as labels for widgets using the `image()` and `deimage()` methods or drawn directly.

The [Fl\\_Image](#) class does almost nothing by itself, but is instead supported by three basic image types:

- [Fl\\_Bitmap](#)
- [Fl\\_Pixmap](#)
- [Fl\\_RGB\\_Image](#)

The [Fl\\_Bitmap](#) class encapsulates a mono-color bitmap image. The `draw()` method draws the image using the current drawing color.

The [Fl\\_Pixmap](#) class encapsulates a colormapped image. The `draw()` method draws the image using the colors in the file, and masks off any transparent colors automatically.

The [Fl\\_RGB\\_Image](#) class encapsulates a full-color (or grayscale) image with 1 to 4 color components. Images with an even number of components are assumed to contain an alpha channel that is used for transparency. The transparency provided by the `draw()` method is either a 24-bit blend against the existing window contents or a "screen door" transparency mask, depending on the platform and screen color depth.

```
char fl_can_do_alpha_blending()
```

`fl_can_do_alpha_blending()` will return 1, if your platform supports true alpha blending for RGBA images, or 0, if FLTK will use screen door transparency.

FLTK also provides several image classes based on the three standard image types for common file formats:

- [Fl\\_GIF\\_Image](#)
- [Fl\\_JPEG\\_Image](#)
- [Fl\\_PNG\\_Image](#)
- [Fl\\_PNM\\_Image](#)
- [Fl\\_XBM\\_Image](#)
- [Fl\\_XPM\\_Image](#)

Each of these image classes load a named file of the corresponding format. The [Fl\\_Shared\\_Image](#) class can be used to load any type of image file - the class examines the file and constructs an image of the appropriate type.

Finally, FLTK provides a special image class called [Fl\\_Tiled\\_Image](#) to tile another image object in the specified area. This class can be used to tile a background image in a [Fl\\_Group](#) widget, for example.

```
virtual void copy();  
virtual void copy(int w, int h);
```

The `copy()` method creates a copy of the image. The second form specifies the new size of the image - the image is resized using the nearest-neighbor algorithm.

```
void draw(int x, int y, int w, int h, int ox = 0, int oy = 0);
```

The draw() method draws the image object.  $x, y, w, h$  indicates a destination rectangle.  $ox, oy, w, h$  is a source rectangle. This source rectangle is copied to the destination. The source rectangle may extend outside the image, i.e.  $ox$  and  $oy$  may be negative and  $w$  and  $h$  may be bigger than the image, and this area is left unchanged.

```
void draw(int x, int y)
```

Draws the image with the upper-left corner at  $x, y$ . This is the same as doing `draw(x,y,img->w(),img->h(),0,0)`.

#### 6.4.4 Offscreen Drawing

Sometimes it can be very useful to generate a complex drawing in memory first and copy it to the screen at a later point in time. This technique can significantly reduce the amount of repeated drawing. [Fl\\_Double\\_Window](#) uses offscreen rendering to avoid flickering on systems that don't support double-buffering natively.

```
Fl_Offscreen fl_create_offscreen(int w, int h)
```

Create an RGB offscreen buffer with  $w*h$  pixels.

```
void fl_delete_offscreen(Fl_Offscreen)
```

Delete a previously created offscreen buffer. All drawings are lost.

```
void fl_begin_offscreen(Fl_Offscreen)
```

Send all subsequent drawing commands to this offscreen buffer. FLTK can draw into a buffer at any time. There is no need to wait for an [Fl\\_Widget::draw\(\)](#) to occur.

```
void fl_end_offscreen()
```

Quit sending drawing commands to this offscreen buffer.

```
void fl_copy_offscreen(int x, int y, int w, int h, Fl_Offscreen osrc, int srcx, int srcy)
```

Copy a rectangular area of the size  $w*h$  from  $srcx, srcy$  in the offscreen buffer into the current buffer at  $x, y$ .

## **Chapter 7**

### **4 - Designing a Simple Text Editor**

This chapter takes you through the design of a simple FLTK-based text editor.

## 7.1 Determining the Goals of the Text Editor

Since this will be the first big project you'll be doing with FLTK, let's define what we want our text editor to do:

1. Provide a menubar/menus for all functions.
2. Edit a single text file, possibly with multiple views.
3. Load from a file.
4. Save to a file.
5. Cut/copy/delete/paste functions.
6. Search and replace functions.
7. Keep track of when the file has been changed.

## 7.2 Designing the Main Window

Now that we've outlined the goals for our editor, we can begin with the design of our GUI. Obviously the first thing that we need is a window, which we'll place inside a class called `EditorWindow`:

```
class EditorWindow : public Fl_Double_Window {
public:
    EditorWindow(int w, int h, const char* t);
    ~EditorWindow();

    Fl_Window      *replace_dlg;
    Fl_Input       *replace_find;
    Fl_Input       *replace_with;
    Fl_Button      *replace_all;
    Fl_Return_Button *replace_next;
    Fl_Button      *replace_cancel;

    Fl_Text_Editor *editor;
    char           search[256];
};
```

## 7.3 Variables

Our text editor will need some global variables to keep track of things:

```
int          changed = 0;
char         filename[256] = "";
Fl_Text_Buffer *textbuf;
```

The `textbuf` variable is the text editor buffer for our window class described previously. We'll cover the other variables as we build the application.

## 7.4 Menubars and Menus

The first goal requires us to use a menubar and menus that define each function the editor needs to perform. The `Fl_Menu_Item` structure is used to define the menus and items in a menubar:

```
Fl_Menu_Item menuitems[] = {
    { "&File", 0, 0, 0, FL_SUBMENU },
    { "&New File", 0, (Fl_Callback *)new_cb },
    { "&Open File...", FL_CTRL + 'o', (Fl_Callback *)open_cb },
    { "&Insert File...", FL_CTRL + 'i', (Fl_Callback *)insert_cb, 0, FL_MENU_DIVIDER },
    { "&Save File", FL_CTRL + 's', (Fl_Callback *)save_cb },
    { "&Save File &As...", FL_CTRL + FL_SHIFT + 's', (Fl_Callback *)saveas_cb, 0, FL_MENU_DIVIDER },
    { "New &View", FL_ALT + 'v', (Fl_Callback *)view_cb, 0 },
    { "&Close View", FL_CTRL + 'w', (Fl_Callback *)close_cb, 0, FL_MENU_DIVIDER },
    { "&Exit", FL_CTRL + 'q', (Fl_Callback *)quit_cb, 0 },
    { 0 },

    { "&Edit", 0, 0, 0, FL_SUBMENU },
    { "&Undo", FL_CTRL + 'z', (Fl_Callback *)undo_cb, 0, FL_MENU_DIVIDER },
    { "&Cu&t", FL_CTRL + 'x', (Fl_Callback *)cut_cb },
    { "&Copy", FL_CTRL + 'c', (Fl_Callback *)copy_cb },
    { "&Paste", FL_CTRL + 'v', (Fl_Callback *)paste_cb },
    { "&Delete", 0, (Fl_Callback *)delete_cb },
    { 0 },

    { "&Search", 0, 0, 0, FL_SUBMENU },
    { "&Find...", FL_CTRL + 'f', (Fl_Callback *)find_cb },
    { "Find Again", FL_CTRL + 'g', find2_cb },
    { "&Replace...", FL_CTRL + 'r', replace_cb },
    { "Re&place Again", FL_CTRL + 't', replace2_cb },
    { 0 },

    { 0 }
};
```

Once we have the menus defined we can create the `Fl_Menu_Bar` widget and assign the menus to it with:

```
Fl_Menu_Bar *m = new Fl_Menu_Bar(0, 0, 640, 30);
m->copy(menuitems);
```

We'll define the callback functions later.

## 7.5 Editing the Text

To keep things simple our text editor will use the `Fl_Text_Editor` widget to edit the text:

```
w->editor = new Fl_Text_Editor(0, 30, 640, 370);
w->editor->buffer(textbuf);
```

So that we can keep track of changes to the file, we also want to add a "modify" callback:

```
textbuf->add_modify_callback(changed_cb, w);
textbuf->call_modify_callbacks();
```

Finally, we want to use a mono-spaced font like `FL_COURIER`:

```
w->editor->textfont(FL_COURIER);
```

## 7.6 The Replace Dialog

We can use the FLTK convenience functions for many of the editor's dialogs, however the replace dialog needs its own custom window. To keep things simple we will have a "find" string, a "replace" string, and "replace all", "replace next", and "cancel" buttons. The strings are just `Fl_Input` widgets, the "replace all" and "cancel" buttons are `Fl_Button` widgets, and the "replace next" button is a `Fl_Return_Button` widget:

```
Fl_Window *replace_dlg = new Fl_Window(300, 105, "Replace");
Fl_Input *replace_find = new Fl_Input(70, 10, 200, 25, "Find:");
Fl_Input *replace_with = new Fl_Input(70, 40, 200, 25, "Replace:");
Fl_Button *replace_all = new Fl_Button(10, 70, 90, 25, "Replace All");
Fl_Button *replace_next = new Fl_Button(105, 70, 120, 25, "Replace Next");
Fl_Button *replace_cancel = new Fl_Button(230, 70, 60, 25, "Cancel");
```

## 7.7 Callbacks

Now that we've defined the GUI components of our editor, we need to define our callback functions.

### 7.7.1 changed\_cb()

This function will be called whenever the user changes any text in the `editor` widget:

```
void changed_cb(int, int nInserted, int nDeleted, int, const char*, void* v) {
    if ((nInserted || nDeleted) && !loading) changed = 1;
    EditorWindow *w = (EditorWindow *)v;
    set_title(w);
    if (loading) w->editor->show_insert_position();
}
```

The `set_title()` function is one that we will write to set the changed status on the current file. We're doing it this way because we want to show the changed status in the window's title bar.

### 7.7.2 copy\_cb()

This callback function will call `kf_copy()` to copy the currently selected text to the clipboard:

```
void copy_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    Fl_Text_Editor::kf_copy(0, e->editor);
}
```

### 7.7.3 cut\_cb()

This callback function will call `kf_cut()` to cut the currently selected text to the clipboard:

```
void cut_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    Fl_Text_Editor::kf_cut(0, e->editor);
}
```

### 7.7.4 delete\_cb()

This callback function will call `remove_selection()` to delete the currently selected text to the clipboard:

```
void delete_cb(Fl_Widget*, void* v) {
    textbuf->remove_selection();
}
```

### 7.7.5 find\_cb()

This callback function asks for a search string using the `fl_input()` convenience function and then calls the `find2_cb()` function to find the string:

```
void find_cb(Fl_Widget* w, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    const char *val;

    val = fl_input("Search String:", e->search);
    if (val != NULL) {
        // User entered a string - go find it!
        strcpy(e->search, val);
        find2_cb(w, v);
    }
}
```

### 7.7.6 find2\_cb()

This function will find the next occurrence of the search string. If the search string is blank then we want to pop up the search dialog:

```
void find2_cb(Fl_Widget* w, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    if (e->search[0] == '\0') {
        // Search string is blank; get a new one...
        find_cb(w, v);
        return;
    }

    int pos = e->editor->insert_position();
    int found = textbuf->search_forward(pos, e->search, &pos);
    if (found) {
        // Found a match; select and update the position...
        textbuf->select(pos, pos+strlen(e->search));
        e->editor->insert_position(pos+strlen(e->search));
        e->editor->show_insert_position();
    }
    else fl_alert("No occurrences of '%s' found!", e->search);
}
```

If the search string cannot be found we use the `fl_alert()` convenience function to display a message to that effect.

### 7.7.7 new\_cb()

This callback function will clear the editor widget and current filename. It also calls the `check_save()` function to give the user the opportunity to save the current file first as needed:

```
void new_cb(Fl_Widget*, void*) {
    if (!check_save()) return;

    filename[0] = '\0';
    textbuf->select(0, textbuf->length());
    textbuf->remove_selection();
    changed = 0;
    textbuf->call_modify_callbacks();
}
```

### 7.7.8 open\_cb()

This callback function will ask the user for a filename and then load the specified file into the input widget and current filename. It also calls the `check_save()` function to give the user the opportunity to save the current file first as needed:

```
void open_cb(Fl_Widget*, void*) {
    if (!check_save()) return;

    char *newfile = fl_file_chooser("Open File?", "*", filename);
    if (newfile != NULL) load_file(newfile, -1);
}
```

We call the `load_file()` function to actually load the file.

### 7.7.9 paste\_cb()

This callback function will call `kf_paste()` to paste the clipboard at the current position:

```
void paste_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    Fl_Text_Editor::kf_paste(0, e->editor);
}
```

### 7.7.10 quit\_cb()

The quit callback will first see if the current file has been modified, and if so give the user a chance to save it. It then exits from the program:

```
void quit_cb(Fl_Widget*, void*) {
    if (changed && !check_save())
        return;

    exit(0);
}
```

### 7.7.11 replace\_cb()

The replace callback just shows the replace dialog:

```
void replace_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    e->replace_dlg->show();
}
```

### 7.7.12 replace2\_cb()

This callback will replace the next occurrence of the replacement string. If nothing has been entered for the replacement string, then the replace dialog is displayed instead:

```
void replace2_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    const char *find = e->replace_find->value();
    const char *replace = e->replace_with->value();

    if (find[0] == '\0') {
        // Search string is blank; get a new one...
        e->replace_dlg->show();
        return;
    }

    e->replace_dlg->hide();

    int pos = e->editor->insert_position();
    int found = textbuf->search_forward(pos, find, &pos);

    if (found) {
        // Found a match; update the position and replace text...
        textbuf->select(pos, pos+strlen(find));
        textbuf->remove_selection();
        textbuf->insert(pos, replace);
        textbuf->select(pos, pos+strlen(replace));
        e->editor->insert_position(pos+strlen(replace));
        e->editor->show_insert_position();
    }
    else fl_alert("No occurrences of '%s' found!", find);
}
```

### 7.7.13 replall\_cb()

This callback will replace all occurrences of the search string in the file:

```
void replall_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    const char *find = e->replace_find->value();
    const char *replace = e->replace_with->value();

    find = e->replace_find->value();
    if (find[0] == '\0') {
        // Search string is blank; get a new one...
        e->replace_dlg->show();
        return;
    }

    e->replace_dlg->hide();

    e->editor->insert_position(0);
    int times = 0;

    // Loop through the whole string
    for (int found = 1; found;) {
        int pos = e->editor->insert_position();
        found = textbuf->search_forward(pos, find, &pos);

        if (found) {
            // Found a match; update the position and replace text...
            textbuf->select(pos, pos+strlen(find));
            textbuf->remove_selection();
            textbuf->insert(pos, replace);
        }
    }
}
```

```

    e->editor->insert_position(pos+strlen(replace));
    e->editor->show_insert_position();
    times++;
}
}

if (times) fl_message("Replaced %d occurrences.", times);
else fl_alert("No occurrences of '\'%s\' found!", find);
}

```

### 7.7.14 replcan\_cb()

This callback just hides the replace dialog:

```

void replcan_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    e->replace_dlg->hide();
}

```

### 7.7.15 save\_cb()

This callback saves the current file. If the current filename is blank it calls the "save as" callback:

```

void save_cb(void) {
    if (filename[0] == '\0') {
        // No filename - get one!
        saveas_cb();
        return;
    }
    else save_file(filename);
}

```

The `save_file()` function saves the current file to the specified filename.

### 7.7.16 saveas\_cb()

This callback asks the user for a filename and saves the current file:

```

void saveas_cb(void) {
    char *newfile;

    newfile = fl_file_chooser("Save File As?", "*", filename);
    if (newfile != NULL) save_file(newfile);
}

```

The `save_file()` function saves the current file to the specified filename.

## 7.8 Other Functions

Now that we've defined the callback functions, we need our support functions to make it all work:

### 7.8.1 check\_save()

This function checks to see if the current file needs to be saved. If so, it asks the user if they want to save it:

```
int check_save(void) {
    if (!changed) return 1;

    int r = fl_choice("The current file has not been saved.\n",
                      "Would you like to save it now?",
                      "Cancel", "Save", "Discard");

    if (r == 1) {
        save_cb(); // Save the file...
        return !changed;
    }

    return (r == 2) ? 1 : 0;
}
```

### 7.8.2 load\_file()

This function loads the specified file into the `textbuf` class:

```
int loading = 0;
void load_file(char *newfile, int ipos) {
    loading = 1;
    int insert = (ipos != -1);
    changed = insert;
    if (!insert) strcpy(filename, "");
    int r;
    if (!insert) r = textbuf->loadfile(newfile);
    else r = textbuf->insertfile(newfile, ipos);
    if (r)
        fl_alert("Error reading from file \'%s\' :\n%s.", newfile, strerror(errno));
    else
        if (!insert) strcpy(filename, newfile);
    loading = 0;
    textbuf->call_modify_callbacks();
}
```

When loading the file we use the `loadfile()` method to "replace" the text in the buffer, or the `insertfile()` method to insert text in the buffer from the named file.

### 7.8.3 save\_file()

This function saves the current buffer to the specified file:

```
void save_file(char *newfile) {
    if (textbuf->savefile(newfile))
        fl_alert("Error writing to file \'%s\' :\n%s.", newfile, strerror(errno));
    else
        strcpy(filename, newfile);
    changed = 0;
    textbuf->call_modify_callbacks();
}
```

### 7.8.4 set\_title()

This function checks the `changed` variable and updates the window label accordingly:

```
void set_title(Fl_Window* w) {
    if (filename[0] == '\0') strcpy(title, "Untitled");
    else {
        char *slash;
        slash = strrchr(filename, '/');
    #ifdef WIN32
        if (slash == NULL) slash = strrchr(filename, '\\');
    #endif
        if (slash != NULL) strcpy(title, slash + 1);
        else strcpy(title, filename);
    }

    if (changed) strcat(title, " (modified)");

    w->label(title);
}
```

## 7.9 The main() Function

Once we've created all of the support functions, the only thing left is to tie them all together with the `main()` function. The `main()` function creates a new text buffer, creates a new view (window) for the text, shows the window, loads the file on the command-line (if any), and then enters the FLTK event loop:

```
int main(int argc, char **argv) {
    textbuf = new Fl_Text_Buffer;

    Fl_Window* window = new_view();
    window->show(1, argv);

    if (argc > 1) load_file(argv[1], -1);

    return Fl::run();
}
```

## 7.10 Compiling the Editor

The complete source for our text editor can be found in the `test/editor.cxx` source file. Both the Makefile and Visual C++ workspace include the necessary rules to build the editor. You can also compile it using a standard compiler with:

```
CC -o editor editor.cxx -lfltk -lxext -lx11 -lm
```

or by using the `fltk-config` script with:

```
fltk-config --compile editor.cxx
```

As noted in [Chapter 1](#), you may need to include compiler and linker options to tell them where to find the FLTK library. Also, the `CC` command may also be called `gcc` or `c++` on your system.

Congratulations, you've just built your own text editor!

## 7.11 The Final Product

The final editor window should look like the image in Figure 4-2.

## 7.12 Advanced Features

Now that we've implemented the basic functionality, it is time to show off some of the advanced features of the `F1_Text_Editor` widget.

### 7.12.1 Syntax Highlighting

The `F1_Text_Editor` widget supports highlighting of text with different fonts, colors, and sizes. The implementation is based on the excellent `NEdit` text editor core, which uses a parallel "style" buffer which tracks the font, color, and size of the text that is drawn.

Styles are defined using the `F1_Text_Display::Style_Table_Entry` structure defined in `<FL/F1_Text_Display.H>`:

```
struct Style_Table_Entry {
    Fl_Color color;
    Fl_Font font;
    int size;
    unsigned attr;
};
```

The `color` member sets the color for the text, the `font` member sets the FLTK font index to use, and the `size` member sets the pixel size of the text. The `attr` member is currently not used.

For our text editor we'll define 7 styles for plain code, comments, keywords, and preprocessor directives:

```
F1_Text_Display::Style_Table_Entry styletable[] = {      // Style table
{ FL_BLACK,      FL_COURIER,      FL_NORMAL_SIZE }, // A - Plain
{ FL_DARK_GREEN, FL_COURIER_ITALIC, FL_NORMAL_SIZE }, // B - Line comments
{ FL_DARK_GREEN, FL_COURIER_ITALIC, FL_NORMAL_SIZE }, // C - Block comments
{ FL_BLUE,       FL_COURIER,      FL_NORMAL_SIZE }, // D - Strings
{ FL_DARK_RED,   FL_COURIER,      FL_NORMAL_SIZE }, // E - Directives
{ FL_DARK_RED,   FL_COURIER_BOLD, FL_NORMAL_SIZE }, // F - Types
{ FL_BLUE,       FL_COURIER_BOLD, FL_NORMAL_SIZE } // G - Keywords
};
```

You'll notice that the comments show a letter next to each style - each style in the style buffer is referenced using a character starting with the letter 'A'.

You call the `highlight_data()` method to associate the style data and buffer with the text editor widget:

```
Fl_Text_Buffer *stylebuf;

w->editor->highlight_data(stylebuf, styletable,
                           sizeof(styletable) / sizeof(styletable[0]),
                           'A', style_unfinished_cb, 0);
```

Finally, you need to add a callback to the main text buffer so that changes to the text buffer are mirrored in the style buffer:

```
textbuf->add_modify_callback(style_update, w->editor);
```

The `style_update()` function, like the `change_cb()` function described earlier, is called whenever text is added or removed from the text buffer. It mirrors the changes in the style buffer and then updates the style data as necessary:

```

// 'style_update()' - Update the style buffer...
//

void
style_update(int      pos,          // I - Position of update
            int      nInserted,    // I - Number of inserted chars
            int      nDeleted,     // I - Number of deleted chars
            int      nRestyled,   // I - Number of restyled chars
            const char *deletedText, // I - Text that was deleted
            void     *cbArg) {     // I - Callback data
    int  start,           // Start of text
        end;              // End of text
    char last,            // Last style on line
    *style,              // Style data
    *text;               // Text data

    // If this is just a selection change, just unselect the style buffer...
    if (nInserted == 0 && nDeleted == 0) {
        stylebuf->unselect();
        return;
    }

    // Track changes in the text buffer...
    if (nInserted > 0) {
        // Insert characters into the style buffer...
        style = new char[nInserted + 1];
        memset(style, 'A', nInserted);
        style[nInserted] = '\0';

        stylebuf->replace(pos, pos + nDeleted, style);
        delete[] style;
    } else {
        // Just delete characters in the style buffer...
        stylebuf->remove(pos, pos + nDeleted);
    }

    // Select the area that was just updated to avoid unnecessary
    // callbacks...
    stylebuf->select(pos, pos + nInserted - nDeleted);

    // Re-parse the changed region; we do this by parsing from the
    // beginning of the line of the changed region to the end of
    // the line of the changed region... Then we check the last
    // style character and keep updating if we have a multi-line
    // comment character...
    start = textbuf->line_start(pos);
    end   = textbuf->line_end(pos + nInserted - nDeleted);
    text  = textbuf->text_range(start, end);
    style = stylebuf->text_range(start, end);
    last  = style[end - start - 1];

    style_parse(text, style, end - start);

    stylebuf->replace(start, end, style);
    ((Fl_Text_Editor *)cbArg)->redisplay_range(start, end);

    if (last != style[end - start - 1]) {
        // The last character on the line changed styles, so reparse the
        // remainder of the buffer...
        free(text);
        free(style);
    }
}

```

```

    end    = textbuf->length();
    text   = textbuf->text_range(start, end);
    style  = stylebuf->text_range(start, end);

    style_parse(text, style, end - start);

    stylebuf->replace(start, end, style);
    ((Fl_Text_Editor *)cbArg)->redisplay_range(start, end);
}

free(text);
free(style);
}

```

The `style_parse()` function scans a copy of the text in the buffer and generates the necessary style characters for display. It assumes that parsing begins at the start of a line:

```

/*
// 'style_parse()' - Parse text and produce style data.
//

void
style_parse(const char *text,
            char      *style,
            int       length) {
    char      current;
    int       col;
    int       last;
    char     buf[255],
             *bufptr;
    const char *temp;

    for (current = *style, col = 0, last = 0; length > 0; length --, text++) {
        if (current == 'A') {
            // Check for directives, comments, strings, and keywords...
            if (col == 0 && *text == '#') {
                // Set style to directive
                current = 'E';
            } else if (strncmp(text, "//", 2) == 0) {
                current = 'B';
            } else if (strncmp(text, "/*", 2) == 0) {
                current = 'C';
            } else if (strncmp(text, "\\\\"", 2) == 0) {
                // Quoted quote...
                *style++ = current;
                *style++ = current;
                text++;
                length--;
                col += 2;
                continue;
            } else if (*text == '\"') {
                current = 'D';
            } else if (!last && islower(*text)) {
                // Might be a keyword...
                for (temp = text, bufptr = buf;
                     islower(*temp) && bufptr < (buf + sizeof(buf) - 1);
                     *bufptr++ = *temp++);
                    if (!islower(*temp)) {
                        *bufptr = '\0';
                        bufptr = buf;
                        if (bsearch(&bufptr, code_types,
                                   sizeof(code_types) / sizeof(code_types[0]),

```

```

        sizeof(code_types[0]), compare_keywords)) {
    while (text < temp) {
        *style++ = 'F';
        text++;
        length--;
        col++;
    }

    text--;
    length++;
    last = 1;
    continue;
} else if (bsearch(&bufptr, code_keywords,
                    sizeof(code_keywords) / sizeof(code_keywords[0]),
                    sizeof(code_keywords[0]), compare_keywords)) {
    while (text < temp) {
        *style++ = 'G';
        text++;
        length--;
        col++;
    }

    text--;
    length++;
    last = 1;
    continue;
}
}

} else if (current == 'C' && strncmp(text, "*/", 2) == 0) {
    // Close a C comment...
    *style++ = current;
    *style++ = current;
    text++;
    length--;
    current = 'A';
    col += 2;
    continue;
} else if (current == 'D') {
    // Continuing in string...
    if (strncmp(text, "\\\"", 2) == 0) {
        // Quoted end quote...
        *style++ = current;
        *style++ = current;
        text++;
        length--;
        col += 2;
        continue;
    } else if (*text == '\"') {
        // End quote...
        *style++ = current;
        col++;
        current = 'A';
        continue;
    }
}

// Copy style info...
if (current == 'A' && (*text == '{' || *text == '}')) *style++ = 'G';
else *style++ = current;
col++;

last = isalnum(*text) || *text == '.';
if (*text == '\n') {
    // Reset column and possibly reset the style
    col = 0;
}

```

```
        if (current == 'B' || current == 'E') current = 'A';
    }
}
```



## **Chapter 8**

### **6 - Handling Events**

This chapter discusses the FLTK event model and how to handle events in your program or widget.

## 8.1 The FLTK Event Model

Every time a user moves the mouse pointer, clicks a button, or presses a key, an event is generated and sent to your application. Events can also come from other programs like the window manager.

Events are identified by the integer argument passed to the `Fl_Widget::handle()` virtual method. Other information about the most recent event is stored in static locations and acquired by calling the `Fl::event_*` methods. This static information remains valid until the next event is read from the window system, so it is ok to look at it outside of the `handle()` method.

## 8.2 Mouse Events

### 8.2.1 FL\_PUSH

A mouse button has gone down with the mouse pointing at this widget. You can find out what button by calling `Fl::event_button()`. You find out the mouse position by calling `Fl::event_x()` and `Fl::event_y()`.

A widget indicates that it "wants" the mouse click by returning non-zero from its `handle()` method. It will then become the `Fl::pushed()` widget and will get `FL_DRAG` and the matching `FL_RELEASE` events. If `handle()` returns zero then FLTK will try sending the `FL_PUSH` to another widget.

### 8.2.2 FL\_DRAG

The mouse has moved with a button held down. The current button state is in `Fl::event_state()`. The mouse position is in `Fl::event_x()` and `Fl::event_y()`.

In order to receive `FL_DRAG` events, the widget must return non-zero when handling `FL_PUSH`.

### 8.2.3 FL\_RELEASE

A mouse button has been released. You can find out what button by calling `Fl::event_button()`.

In order to receive the `FL_RELEASE` event, the widget must return non-zero when handling `FL_PUSH`.

### 8.2.4 FL\_MOVE

The mouse has moved without any mouse buttons held down. This event is sent to the `Fl::belowmouse()` widget.

In order to receive `FL_MOVE` events, the widget must return non-zero when handling `FL_ENTER`.

### 8.2.5 FL\_MOUSEWHEEL

The user has moved the mouse wheel. The `Fl::event_dx()` and `Fl::event_dy()` methods can be used to find the amount to scroll horizontally and vertically.

## 8.3 Focus Events

### 8.3.1 FL\_ENTER

The mouse has been moved to point at this widget. This can be used for highlighting feedback. If a widget wants to highlight or otherwise track the mouse, it indicates this by returning non-zero from its `handle()` method. It then becomes the `Fl::belowmouse()` widget and will receive `FL_MOVE` and `FL_LEAVE` events.

### 8.3.2 FL\_LEAVE

The mouse has moved out of the widget.

In order to receive the `FL_LEAVE` event, the widget must return non-zero when handling `FL_ENTER`.

### 8.3.3 FL\_FOCUS

This indicates an *attempt* to give a widget the keyboard focus.

If a widget wants the focus, it should change itself to display the fact that it has the focus, and return non-zero from its `handle()` method. It then becomes the `Fl::focus()` widget and gets `FL_KEYDOWN`, `FL_KEYUP`, and `FL_UNFOCUS` events.

The focus will change either because the window manager changed which window gets the focus, or because the user tried to navigate using tab, arrows, or other keys. You can check `Fl::event_key()` to figure out why it moved. For navigation it will be the key pressed and interaction with the window manager it will be zero.

### 8.3.4 FL\_UNFOCUS

This event is sent to the previous `Fl::focus()` widget when another widget gets the focus or the window loses focus.

## 8.4 Keyboard Events

### 8.4.1 FL\_KEYDOWN, FL\_KEYUP

A key was pressed or released. The key can be found in `Fl::event_key()`. The text that the key should insert can be found with `Fl::event_text()` and its length is in `Fl::event_length()`. If you use the key `handle()` should return 1. If you return zero then FLTK assumes you ignored the key and will then attempt to send it to a parent widget. If none of them want it, it will change the event into a `FL_SHORTCUT` event.

To receive `FL_KEYBOARD` events you must also respond to the `FL_FOCUS` and `FL_UNFOCUS` events.

If you are writing a text-editing widget you may also want to call the `Fl::compose()` function to translate individual keystrokes into foreign characters.

`FL_KEYUP` events are sent to the widget that currently has focus. This is not necessarily the same widget that received the corresponding `FL_KEYDOWN` event because focus may have changed between events.

### 8.4.2 FL\_SHORTCUT

If the `Fl::focus()` widget is zero or ignores an `FL_KEYBOARD` event then FLTK tries sending this event to every widget it can, until one of them returns non-zero. `FL_SHORTCUT` is first sent to the `Fl::belowmouse()` widget, then its parents and siblings, and eventually to every widget in the window, trying to find an object that returns non-zero. FLTK tries really hard to not to ignore any keystrokes!

You can also make "global" shortcuts by using `Fl::add_handler()`. A global shortcut will work no matter what windows are displayed or which one has the focus.

## 8.5 Widget Events

### 8.5.1 FL\_DEACTIVATE

This widget is no longer active, due to `deactivate()` being called on it or one of its parents. `active()` may still be true after this, the widget is only active if `active()` is true on it and all its parents (use `active_r()` to check this).

### 8.5.2 FL\_ACTIVATE

This widget is now active, due to `activate()` being called on it or one of its parents.

### 8.5.3 FL\_HIDE

This widget is no longer visible, due to `hide()` being called on it or one of its parents, or due to a parent window being minimized. `visible()` may still be true after this, but the widget is visible only if `visible()` is true for it and all its parents (use `visible_r()` to check this).

### 8.5.4 FL\_SHOW

This widget is visible again, due to `show()` being called on it or one of its parents, or due to a parent window being restored. *Child Fl\_Windows respond to this by actually creating the window if not done already, so if you subclass a window, be sure to pass FL\_SHOW to the base class handle() method!*

## 8.6 Clipboard Events

### 8.6.1 FL\_PASTE

You should get this event some time after you call `Fl::paste()`. The contents of `Fl::event_text()` is the text to insert and the number of characters is in `Fl::event_length()`.

### 8.6.2 FL\_SELECTIONCLEAR

The `Fl::selection_owner()` will get this event before the selection is moved to another widget. This indicates that some other widget or program has claimed the selection. Motif programs used this to clear the selection indication. Most modern programs ignore this.

## 8.7 Drag and Drop Events

FLTK supports drag and drop of text and files from any application on the desktop. Text is transferred using the current code page. Files are received as a list of full path and file names, separated by newline. On some platforms, path names are prepended with `file://`.

The drag and drop data is available in `Fl::event_text()` at the concluding `FL_PASTE`. On some platforms, the event text is also available for the `FL_DND_*` events, however application must not depend on that behavior because it depends on the protocol used on each platform.

`FL_DND_*` events cannot be used in widgets derived from `Fl_Group` or `Fl_Window`.

### 8.7.1 FL\_DND\_ENTER

The mouse has been moved to point at this widget. A widget that is interested in receiving drag'n'drop data must return 1 to receive `FL_DND_DRAG`, `FL_DND_LEAVE` and `FL_DND_RELEASE` events.

### 8.7.2 FL\_DND\_DRAG

The mouse has been moved inside a widget while dragging data. A widget that is interested in receiving drag'n'drop data should indicate the possible drop position.

### 8.7.3 FL\_DND\_LEAVE

The mouse has moved out of the widget.

### 8.7.4 FL\_DND\_RELEASE

The user has released the mouse button dropping data into the widget. If the widget returns 1, it will receive the data in the immediately following `FL_PASTE` event.

## 8.8 Fl::event\_\*() methods

FLTK keeps the information about the most recent event in static storage. This information is good until the next event is processed. Thus it is valid inside `handle()` and `callback()` methods.

These are all trivial inline functions and thus very fast and small:

- `Fl::event_button`
- `Fl::event_clicks`
- `Fl::event_dx`
- `Fl::event_dy`
- `Fl::event_inside`
- `Fl::event_is_click`

- `Fl::event_key`
- `Fl::event_length`
- `Fl::event_state`
- `Fl::event_text`
- `Fl::event_x`
- `Fl::event_x_root`
- `Fl::event_y`
- `Fl::event_y_root`
- `Fl::get_key`
- `Fl::get_mouse`
- `Fl::test_shortcut`

## 8.9 Event Propagation

FLTK follows very simple and unchangeable rules for sending events. The major innovation is that widgets can indicate (by returning 0 from the `handle()` method) that they are not interested in an event, and FLTK can then send that event elsewhere. This eliminates the need for "interests" (event masks or tables), and this is probably the main reason FLTK is much smaller than other toolkits.

Most events are sent directly to the `handle()` method of the `Fl_Window` that the window system says they belong to. The window (actually the `Fl_Group` that `Fl_Window` is a subclass of) is responsible for sending the events on to any child widgets. To make the `Fl_Group` code somewhat easier, FLTK sends some events (`FL_DRAG`, `FL_RELEASE`, `FL_KEYBOARD`, `FL_SHORTCUT`, `FL_UNFOCUS`, and `FL_LEAVE`) directly to leaf widgets. These procedures control those leaf widgets:

- `Fl::add_handler`
- `Fl::belowmouse`
- `Fl::focus`
- `Fl::grab`
- `Fl::modal`
- `Fl::pushed`
- `Fl::release`
- `Fl_Widget::take_focus`

## 8.10 FLTK Compose-Character Sequences

The foreign-letter compose processing done by the `F1_Input` widget is provided in a function that you can call if you are writing your own text editor widget.

FLTK uses its own compose processing to allow "preview" of the partially composed sequence, which is impossible with the usual "dead key" processing.

Although currently only characters in the ISO-8859-1 character set are handled, you should call this in case any enhancements to the processing are done in the future. The interface has been designed to handle arbitrary UTF-8 encoded text.

The following methods are provided for character composition:

- `F1::compose()`
- `F1::compose_reset()`



## **Chapter 9**

### **7 - Adding and Extending Widgets**

This chapter describes how to add your own widgets or extend existing widgets in FLTK.

## 9.1 Subclassing

New widgets are created by *subclassing* an existing FLTK widget, typically `F1_Widget` for controls and `F1_Group` for composite widgets.

A control widget typically interacts with the user to receive and/or display a value of some sort.

A composite widget holds a list of child widgets and handles moving, sizing, showing, or hiding them as needed. `F1_Group` is the main composite widget class in FLTK, and all of the other composite widgets (`F1_Pack`, `F1_Scroll`, `F1_Tabs`, `F1_Tile`, and `F1_Window`) are subclasses of it.

You can also subclass other existing widgets to provide a different look or user-interface. For example, the button widgets are all subclasses of `F1_Button` since they all interact with the user via a mouse button click. The only difference is the code that draws the face of the button.

## 9.2 Making a Subclass of `F1_Widget`

Your subclasses can directly descend from `F1_Widget` or any subclass of `F1_Widget`. `F1_Widget` has only four virtual methods, and overriding some or all of these may be necessary.

## 9.3 The Constructor

The constructor should have the following arguments:

```
MyClass(int x, int y, int w, int h, const char *label = 0);
```

This will allow the class to be used in `FLUID` without problems.

The constructor must call the constructor for the base class and pass the same arguments:

```
MyClass::MyClass(int x, int y, int w, int h, const char *label)
: F1_Widget(x, y, w, h, label) {
// do initialization stuff...
}
```

`F1_Widget`'s protected constructor sets `x()`, `y()`, `w()`, `h()`, and `label()` to the passed values and initializes the other instance variables to:

```
type(0);
box(FL_NO_BOX);
color(FL_BACKGROUND_COLOR);
selection_color(FL_BACKGROUND_COLOR);
labeltype(FL_NORMAL_LABEL);
labelstyle(FL_NORMAL_STYLE);
labelsize(FL_NORMAL_SIZE);
labelcolor(FL_FOREGROUND_COLOR);
align(FL_ALIGN_CENTER);
callback(default_callback, 0);
flags(ACTIVE|VISIBLE);
image(0);
deimage(0);
```

## 9.4 Protected Methods of Fl\_Widget

The following methods are provided for subclasses to use:

- `Fl_Widget::clear_visible`
- `Fl_Widget::damage`
- `Fl_Widget::draw_box`
- `Fl_Widget::draw_focus`
- `Fl_Widget::draw_label`
- `Fl_Widget::set_flag`
- `Fl_Widget::set_visible`
- `Fl_Widget::test_shortcut`
- `Fl_Widget::type`

```
void Fl_Widget::damage(uchar mask)
void Fl_Widget::damage(uchar mask, int x, int y, int w, int h)
uchar Fl_Widget::damage()
```

The first form indicates that a partial update of the object is needed. The bits in `mask` are OR'd into `damage()`. Your `draw()` routine can examine these bits to limit what it is drawing. The public method `Fl_Widget::redraw()` simply does `Fl_Widget::damage(FL_DAMAGE_ALL)`, but the implementation of your widget can call the private `damage(n)`.

The second form indicates that a region is damaged. If only these calls are done in a window (no calls to `damage(n)`) then FLTK will clip to the union of all these calls before drawing anything. This can greatly speed up incremental displays. The mask bits are OR'd into `damage()` unless this is a `Fl_Window` widget.

The third form returns the bitwise-OR of all `damage(n)` calls done since the last `draw()`.

*When redrawing your widgets you should look at the damage bits to see what parts of your widget need redrawing.* The `handle()` method can then set individual damage bits to limit the amount of drawing that needs to be done:

```
 MyClass::handle(int event) {
    ...
    if (change_to_part1) damage(1);
    if (change_to_part2) damage(2);
    if (change_to_part3) damage(4);
}

MyClass::draw() {
    if (damage() & FL_DAMAGE_ALL) {
        ... draw frame/box and other static stuff ...
    }
}
```

```

    if (damage() && (FL_DAMAGE_ALL | 1)) draw_part1();
    if (damage() && (FL_DAMAGE_ALL | 2)) draw_part2();
    if (damage() && (FL_DAMAGE_ALL | 4)) draw_part3();
}

```

```

void Fl_Widget::draw_box() const
void Fl_Widget::draw_box(Fl_Boxtype b, ulong c) const

```

The first form draws this widget's `box()`, using the dimensions of the widget. The second form uses `b` as the box type and `c` as the color for the box.

```

void Fl_Widget::draw_focus() const
void Fl_Widget::draw_focus(Fl_Boxtype b, int x, int y, int w, int h) const

```

Draws a focus box inside the widget's bounding box. The second form allows you to specify a different bounding box.

```

void Fl_Widget::draw_label() const
void Fl_Widget::draw_label(int x, int y, int w, int h) const
void Fl_Widget::draw_label(int x, int y, int w, int h, Fl_Align align) const

```

This is the usual function for a `draw()` method to call to draw the widget's label. It does not draw the label if it is supposed to be outside the box (on the assumption that the enclosing group will draw those labels).

The second form uses the passed bounding box instead of the widget's bounding box. This is useful so "centered" labels are aligned with some feature, like a moving slider.

The third form draws the label anywhere. It acts as though `FL_ALIGN_INSIDE` has been forced on so the label will appear inside the passed bounding box. This is designed for parent groups to draw labels with.

```
void Fl_Widget::set_flag(SHORTCUT_LABEL)
```

Modifies `draw_label()` so that '&' characters cause an underscore to be printed under the next letter.

```

void Fl_Widget::set_visible()
void Fl_Widget::clear_visible()

```

Fast inline versions of `Fl_Widget::hide()` and `Fl_Widget::show()`. These do not send the `FL_HIDE` and `FL_SHOW` events to the widget.

```
int Fl_Widget::test_shortcut() const  
static int Fl_Widget::test_shortcut(const char *s)
```

The first version tests `Fl_Widget::label()` against the current event (which should be a `FL_SHORTCUT` event). If the label contains a '&' character and the character after it matches the key press, this returns true. This returns false if the `SHORTCUT_LABEL` flag is off, if the label is NULL or does not have a '&' character in it, or if the keypress does not match the character.

The second version lets you do this test against an arbitrary string.

```
uchar Fl_Widget::type() const  
void Fl_Widget::type(uchar t)
```

The property `Fl_Widget::type()` can return an arbitrary 8-bit identifier, and can be set with the protected method `type(uchar t)`. This value had to be provided for Forms compatibility, but you can use it for any purpose you want. Try to keep the value less than 100 to not interfere with reserved values.

FLTK does not use RTTI (Run Time Typing Infomation), to enhance portability. But this may change in the near future if RTTI becomes standard everywhere.

If you don't have RTTI you can use the clumsy FLTK mechanism, by having `type()` use a unique value. These unique values must be greater than the symbol `FL_RESERVED_TYPE` (which is 100). Look through the header files for `FL_RESERVED_TYPE` to find an unused number. If you make a subclass of `Fl_Window` you must use `FL_WINDOW + n` (`n` must be in the range 1 to 7).

## 9.5 Handling Events

The virtual method `int Fl_Widget::handle(int event)` is called to handle each event passed to the widget. It can:

- Change the state of the widget.
- Call `Fl_Widget::redraw()` if the widget needs to be redisplayed.
- Call `Fl_Widget::damage(n)` if the widget needs a partial-update (assuming you provide support for this in your `Fl_Widget::draw()` method).
- Call `Fl_Widget::do_callback()` if a callback should be generated.
- Call `Fl_Widget::handle()` on child widgets.

Events are identified by the integer argument. Other information about the most recent event is stored in static locations and aquired by calling the `Fl::event_*`() functions. This information remains valid until another event is handled.

Here is a sample `handle()` method for a widget that acts as a pushbutton and also accepts the keystroke 'x' to cause the callback:

```

int MyClass::handle(int event) {
    switch(event) {
        case FL_PUSH:
            highlight = 1;
            redraw();
            return 1;
        case FL_DRAG: {
            int t = Fl::event_inside(this);
            if (t != highlight) {
                highlight = t;
                redraw();
            }
        }
        return 1;
    case FL_RELEASE: {
        if (highlight) {
            highlight = 0;
            redraw();
            do_callback();
            // never do anything after a callback, as the callback
            // may delete the widget!
        }
        return 1;
    case FL_SHORTCUT:
        if (Fl::event_key() == 'x') {
            do_callback();
            return 1;
        }
        return 0;
    default:
        return Fl_Widget::handle(event);
    }
}

```

You must return non-zero if your `handle()` method uses the event. If you return zero, the parent widget will try sending the event to another widget.

## 9.6 Drawing the Widget

The `draw()` virtual method is called when FLTK wants you to redraw your widget. It will be called if and only if `damage()` is non-zero, and `damage()` will be cleared to zero after it returns. The `draw()` method should be declared protected so that it can't be called from non-drawing code.

The `damage()` value contains the bitwise-OR of all the `damage(n)` calls to this widget since it was last drawn. This can be used for minimal update, by only redrawing the parts whose bits are set. FLTK will turn on the `FL_DAMAGE_ALL` bit if it thinks the entire widget must be redrawn, e.g. for an expose event.

Expose events (and the above `damage(b, x, y, w, h)`) will cause `draw()` to be called with FLTK's `clipping` turned on. You can greatly speed up redrawing in some cases by testing `fl_not_clipped(x, y, w, h)` or `fl_clip_box(...)` and skipping invisible parts.

Besides the protected methods described above, FLTK provides a large number of basic drawing functions, which are described [below](#).

## 9.7 Resizing the Widget

The `resize(int x, int y, int w, int h)` method is called when the widget is being resized or moved. The arguments are the new position, width, and height. `x()`, `y()`, `w()`, and `h()` still remain

the old size. You must call `resize()` on your base class with the same arguments to get the widget size to actually change.

This should *not* call `redraw()`, at least if only the `x()` and `y()` change. This is because composite widgets like `Fl_Scroll` may have a more efficient way of drawing the new position.

## 9.8 Making a Composite Widget

A "composite" widget contains one or more "child" widgets. To make a composite widget you should subclass `Fl_Group`. It is possible to make a composite object that is not a subclass of `Fl_Group`, but you'll have to duplicate the code in `Fl_Group` anyways.

Instances of the child widgets may be included in the parent:

```
class MyClass : public Fl_Group {
    Fl_Button the_button;
    Fl_Slider the_slider;
    ...
};
```

The constructor has to initialize these instances. They are automatically added to the group, since the `Fl_Group` constructor does `Fl_Group::begin()`. *Don't forget to call `Fl_Group::end()` or use the `Fl_End` pseudo-class:*

```
MyClass::MyClass(int x, int y, int w, int h) :
    Fl_Group(x, y, w, h),
    the_button(x + 5, y + 5, 100, 20),
    the_slider(x, y + 50, w, 20)
{
    ... (you could add dynamically created child widgets here) ...
    end(); // don't forget to do this!
}
```

The child widgets need callbacks. These will be called with a pointer to the children, but the widget itself may be found in the `parent()` pointer of the child. Usually these callbacks can be static private methods, with a matching private method:

```
void MyClass::static_slider_cb(Fl_Widget* v, void *) { // static method
    ((MyClass*) (v->parent()))->slider_cb();
}
void MyClass::slider_cb() { // normal method
    use(the_slider->value());
}
```

If you make the `handle()` method, you can quickly pass all the events to the children using the `Fl_Group::handle()` method. You don't need to override `handle()` if your composite widget does nothing other than pass events to the children:

```
int MyClass::handle(int event) {
    if (Fl_Group::handle(event)) return 1;
    ... handle events that children don't want ...
}
```

If you override `draw()` you need to draw all the children. If `redraw()` or `damage()` is called on a child, `damage(FL_DAMAGE_CHILD)` is done to the group, so this bit of `damage()` can be used to indicate that a child needs to be drawn. It is fastest if you avoid drawing anything else in this case:

```
int MyClass::draw() {
    Fl_Widget *const*a = array();
    if (damage() == FL_DAMAGE_CHILD) { // only redraw some children
        for (int i = children(); i --; a++) update_child(**a);
    } else { // total redraw
        ... draw background graphics ...
        // now draw all the children atop the background:
        for (int i = children_; i --; a++) {
            draw_child(**a);
            draw_outside_label(**a); // you may not need to do this
        }
    }
}
```

[Fl\\_Group](#) provides some protected methods to make drawing easier:

- [draw\\_child](#)
- [draw\\_outside\\_label](#)
- [update\\_child](#)

```
void Fl_Group::draw_child(Fl_Widget&)
```

This will force the child's damage () bits all to one and call draw () on it, then clear the damage (). You should call this on all children if a total redraw of your widget is requested, or if you draw something (like a background box) that damages the child. Nothing is done if the child is not visible () or if it is clipped.

```
void Fl_Group::draw_outside_label(Fl_Widget&) const
```

Draw the labels that are *not* drawn by [draw\\_label\(\)](#). If you want more control over the label positions you might want to call `child->draw_label(x, y, w, h, a)`.

```
void Fl_Group::update_child(Fl_Widget&)
```

Draws the child only if its damage () is non-zero. You should call this on all the children if your own damage is equal to FL\_DAMAGE\_CHILD. Nothing is done if the child is not visible () or if it is clipped.

## 9.9 Cut and Paste Support

FLTK provides routines to cut and paste 8-bit text (in the future this may be UTF-8) between applications:

- [Fl::paste](#)
- [Fl::selection](#)
- [Fl::selection\\_owner](#)

It may be possible to cut/paste non-text data by using [Fl::add\\_handler\(\)](#).

## 9.10 Drag And Drop Support

FLTK provides routines to drag and drop 8-bit text between applications:

Drag'n'drop operations are initiated by copying data to the clipboard and calling the function `Fl::dnd()`.

Drop attempts are handled via `events`:

- `FL_DND_ENTER`
- `FL_DND_DRAG`
- `FL_DND_LEAVE`
- `FL_DND_RELEASE`
- `FL_PASTE`

## 9.11 Making a subclass of `Fl_Window`

You may want your widget to be a subclass of `Fl_Window`, `Fl_Double_Window`, or `FL_Gl_Window`. This can be useful if your widget wants to occupy an entire window, and can also be used to take advantage of system-provided clipping, or to work with a library that expects a system window ID to indicate where to draw.

Subclassing `Fl_Window` is almost exactly like subclassing `Fl_Group`, and in fact you can easily switch a subclass back and forth. Watch out for the following differences:

1. `Fl_Window` is a subclass of `Fl_Group` so *make sure your constructor calls* `end()` unless you actually want children added to your window.
1. When handling events and drawing, the upper-left corner is at 0,0, not `x()`, `y()` as in other `Fl_Widget`'s. For instance, to draw a box around the widget, call `draw_box(0, 0, w(), h())`, rather than `draw_box(x(), y(), w(), h())`.

You may also want to subclass `Fl_Window` in order to get access to different visuals or to change other attributes of the windows. See "[Appendix F – Operating System Issues](#)" for more information.



## **Chapter 10**

### **8 - Using OpenGL**

This chapter discusses using FLTK for your OpenGL applications.

## 10.1 Using OpenGL in FLTK

The easiest way to make an OpenGL display is to subclass `Fl_Gl_Window`. Your subclass must implement a `draw()` method which uses OpenGL calls to draw the display. Your main program should call `redraw()` when the display needs to change, and (somewhat later) FLTK will call `draw()`.

With a bit of care you can also use OpenGL to draw into normal FLTK windows. This allows you to use Gouraud shading for drawing your widgets. To do this you use the `gl_start()` and `gl_finish()` functions around your OpenGL code.

You must include FLTK's `<FL/gl.h>` header file. It will include the file `<GL/gl.h>`, define some extra drawing functions provided by FLTK, and include the `<windows.h>` header file needed by WIN32 applications.

## 10.2 Making a Subclass of `Fl_Gl_Window`

To make a subclass of `Fl_Gl_Window`, you must provide:

- A class definition.
- A `draw()` method.
- A `handle()` method if you need to receive input from the user.

If your subclass provides static controls in the window, they must be redrawn whenever the `FL_DAMAGE_ALL` bit is set in the value returned by `damage()`. For double-buffered windows you will need to surround the drawing code with the following code to make sure that both buffers are redrawn:

```
#ifndef MESA
glDrawBuffer(GL_FRONT_AND_BACK);
#endif // !MESA
... draw stuff here ...
#ifndef MESA
glDrawBuffer(GL_BACK);
#endif // !MESA
```

**Note:**

If you are using the Mesa graphics library, the call to `glDrawBuffer()` is not required and will slow down drawing considerably. The preprocessor instructions shown above will optimize your code based upon the graphics library used.

### 10.2.1 Defining the Subclass

To define the subclass you just subclass the `Fl_Gl_Window` class:

```
class MyWindow : public Fl_Gl_Window {
    void draw();
    int handle(int);
```

```
public:
    MyWindow(int X, int Y, int W, int H, const char *L)
        : Fl_Gl_Window(X, Y, W, H, L) {}
};
```

The draw() and handle() methods are described below. Like any widget, you can include additional private and public data in your class (such as scene graph information, etc.)

### 10.2.2 The draw() Method

The draw() method is where you actually do your OpenGL drawing:

```
void MyWindow::draw() {
    if (!valid()) {
        ... set up projection, viewport, etc ...
        ... window size is in w() and h().
        ... valid() is turned on by FLTK after draw() returns
    }
    ... draw ...
}
```

### 10.2.3 The handle() Method

The handle() method handles mouse and keyboard events for the window:

```
int MyWindow::handle(int event) {
    switch(event) {
    case FL_PUSH:
        ... mouse down event ...
        ... position in Fl::event_x() and Fl::event_y()
        return 1;
    case FL_DRAG:
        ... mouse moved while down event ...
        return 1;
    case FL_RELEASE:
        ... mouse up event ...
        return 1;
    case FL_FOCUS :
    case FL_UNFOCUS :
        ... Return 1 if you want keyboard events, 0 otherwise
        return 1;
    case FL_KEYBOARD:
        ... keypress, key is in Fl::event_key(), ascii in Fl::event_text()
        ... Return 1 if you understand/use the keyboard event, 0 otherwise...
        return 1;
    case FL_SHORTCUT:
        ... shortcut, key is in Fl::event_key(), ascii in Fl::event_text()
        ... Return 1 if you understand/use the shortcut event, 0 otherwise...
        return 1;
    default:
        // pass other events to the base class...
        return Fl_Gl_Window::handle(event);
    }
}
```

When handle() is called, the OpenGL context is not set up! If your display changes, you should call redraw() and let draw() do the work. Don't call any OpenGL drawing functions from inside handle()!

You can call *some* OpenGL stuff like hit detection and texture loading functions by doing:

```

case FL_PUSH:
    make_current();      // make OpenGL context current
    if (!valid()) {
        ... set up projection exactly the same as draw ...
        valid(1);          // stop it from doing this next time
    }
    ... ok to call NON-DRAWING OpenGL code here, such as hit
    detection, loading textures, etc...

```

Your main program can now create one of your windows by doing new MyWindow(...). You can also use **FLUID** by:

1. Putting your class definition in a MyWindow.H file.
2. Creating a **Fl\_Box** widget in FLUID.
3. In the widget panel fill in the "class" field with MyWindow. This will make FLUID produce constructors for your new class.
4. In the "Extra Code" field put #include "MyWindow.H", so that the FLUID output file will compile.

You must put glwindow->show() in your main code after calling show() on the window containing the OpenGL window.

### 10.3 Using OpenGL in Normal FLTK Windows

You can put OpenGL code into an **Fl\_Widget::draw()** method or into the code for a **boxtyle** or other places with some care.

Most importantly, before you show *any* windows, including those that don't have OpenGL drawing, you **must** initialize FLTK so that it knows it is going to use OpenGL. You may use any of the symbols described for **Fl\_Gl\_Window::mode()** to describe how you intend to use OpenGL:

```
Fl::gl_visual(Fl_RGB);
```

You can then put OpenGL drawing code anywhere you can draw normally by surrounding it with:

```

gl_start();
... put your OpenGL code here ...
gl_finish();

```

**gl\_start()** and **gl\_finish()** set up an OpenGL context with an orthographic projection so that 0,0 is the lower-left corner of the window and each pixel is one unit. The current clipping is reproduced with OpenGL **glScissor()** commands. These functions also synchronize the OpenGL graphics stream with the drawing done by other X, WIN32, or FLTK functions.

The same context is reused each time. If your code changes the projection transformation or anything else you should use **glPushMatrix()** and **glPopMatrix()** functions to put the state back before calling **gl\_finish()**.

You may want to use **Fl\_Window::current()->h()** to get the drawable height so that you can flip the Y coordinates.

Unfortunately, there are a bunch of limitations you must adhere to for maximum portability:

- You must choose a default visual with [Fl::gl\\_visual\(\)](#).
- You cannot pass `FL_DOUBLE` to [Fl::gl\\_visual\(\)](#).
- You cannot use [Fl\\_Double\\_Window](#) or [Fl\\_Overlay\\_Window](#).

Do *not* call `gl_start()` or `gl_finish()` when drawing into an [Fl\\_Gl\\_Window](#) !

## 10.4 OpenGL Drawing Functions

FLTK provides some useful OpenGL drawing functions. They can be freely mixed with any OpenGL calls, and are defined by including `<FL/gl.H>` which you should include instead of the OpenGL header `<GL/gl.h>`.

`void gl_color(Fl_Color)`

Sets the current OpenGL color to a FLTK color. *For color-index modes it will use fl\_xpixel(c), which is only right if this window uses the default colormap!*

`void gl_rect(int x, int y, int w, int h)`

`void gl_rectf(int x, int y, int w, int h)`

Outlines or fills a rectangle with the current color. If [Fl\\_Gl\\_Window::ortho\(\)](#) has been called, then the rectangle will exactly fill the pixel rectangle passed.

`void gl_font(Fl_Font fontid, int size)`

Sets the current OpenGL font to the same font you get by calling [fl\\_font\(\)](#).

`int gl_height()`

`int gl_descent()`

`float gl_width(const char *)`

`float gl_width(const char *, int n)`

`float gl_width(uchar)`

Returns information about the current OpenGL font.

`void gl_draw(const char *)`

`void gl_draw(const char *, int n)`

Draws a nul-terminated string or an array of `n` characters in the current OpenGL font at the current raster position.

```
void gl_draw(const char *, int x, int y)
void gl_draw(const char *, int n, int x, int y)
void gl_draw(const char *, float x, float y)
void gl_draw(const char *, int n, float x, float y)
```

Draws a nul-terminated string or an array of *n* characters in the current OpenGL font at the given position.

```
void gl_draw(const char *, int x, int y, int w, int h, Fl_Align)
```

Draws a string formatted into a box, with newlines and tabs expanded, other control characters changed to <sup>^</sup>X, and aligned with the edges or center. Exactly the same output as [fl\\_draw\(\)](#).

## 10.5 Speeding up OpenGL

Performance of [Fl\\_Gl\\_Window](#) may be improved on some types of OpenGL implementations, in particular MESA and other software emulators, by setting the `GL_SWAP_TYPE` environment variable. This variable declares what is in the backbuffer after you do a swapbuffers.

- `setenv GL_SWAP_TYPE COPY`

This indicates that the back buffer is copied to the front buffer, and still contains it's old data. This is true of many hardware implementations. Setting this will speed up emulation of overlays, and widgets that can do partial update can take advantage of this as `damage()` will not be cleared to -1.

- `setenv GL_SWAP_TYPE NODAMAGE`

This indicates that nothing changes the back buffer except drawing into it. This is true of MESA and Win32 software emulation and perhaps some hardware emulation on systems with lots of memory.

- All other values for `GL_SWAP_TYPE`, and not setting the variable, cause FLTK to assume that the back buffer must be completely redrawn after a swap.

This is easily tested by running the `gl_overlay` demo program and seeing if the display is correct when you drag another window over it or if you drag the window off the screen and back on. You have to exit and run the program again for it to see any changes to the environment variable.

## 10.6 Using OpenGL Optimizer with FLTK

[OpenGL Optimizer](#) is a scene graph toolkit for OpenGL available from Silicon Graphics for IRIX and Microsoft Windows. It allows you to view large scenes without writing a lot of OpenGL code.

### OptimizerWindow Class Definition

To use OpenGL Optimizer with FLTK you'll need to create a subclass of `Fl_Gl_Widget` that includes several state variables:

```

class OptimizerWindow : public Fl_Gl_Window {
    csContext *context_; // Initialized to 0 and set by draw()...
    csDrawAction *draw_action_; // Draw action...
    csGroup *scene_; // Scene to draw...
    csCamara *camera_; // Viewport for scene...

    void draw();

public:
    OptimizerWindow(int X, int Y, int W, int H, const char *L)
        : Fl_Gl_Window(X, Y, W, H, L) {
        context_ = (csContext *)0;
        draw_action_ = (csDrawAction *)0;
        scene_ = (csGroup *)0;
        camera_ = (csCamara *)0;
    }

    void scene(csGroup *g) { scene_ = g; redraw(); }

    void camera(csCamera *c) {
        camera_ = c;
        if (context_) {
            draw_action_->setCamera(camera_);
            camera_->draw(draw_action_);
            redraw();
        }
    }
};

```

### The camera() Method

The `camera()` method sets the camera (projection and viewpoint) to use when drawing the scene. The scene is redrawn after this call.

### The draw() Method

The `draw()` method performs the needed initialization and does the actual drawing:

```

void OptimizerWindow::draw() {
    if (!context_) {
        // This is the first time we've been asked to draw; create the
        // Optimizer context for the scene...

#ifndef WIN32
    context_ = new csContext((HDC)fl_getHDC());
    context_->ref();
    context_->makeCurrent((HDC)fl_getHDC());
#else
    context_ = new csContext(fl_display, fl_visual);
    context_->ref();
    context_->makeCurrent(fl_display, fl_window);
#endif // WIN32

    ... perform other context setup as desired ...

    // Then create the draw action to handle drawing things...

    draw_action_ = new csDrawAction;
    if (camera_) {

```

```
    draw_action_->setCamera(camera_);
    camera_->draw(draw_action_);
}
} else {
#endif WIN32
    context_->makeCurrent((HDC)fl_getHDC());
#else
    context_->makeCurrent(fl_display, fl_window);
#endif // WIN32
}

if (!valid()) {
    // Update the viewport for this context...
    context_->setViewport(0, 0, w(), h());
}

// Clear the window...
context_->clear(csContext::COLOR_CLEAR | csContext::DEPTH_CLEAR,
    0.0f,           // Red
    0.0f,           // Green
    0.0f,           // Blue
    1.0f);          // Alpha

// Then draw the scene (if any)...
if (scene_)
    draw_action_->apply(scene_);
}
```

### The `scene()` Method

The `scene()` method sets the scene to be drawn. The scene is a collection of 3D objects in a `csGroup`. The scene is redrawn after this call.

## **Chapter 11**

# **9 - Programming with FLUID**

This chapter shows how to use the Fast Light User-Interface Designer ("FLUID") to create your GUIs.

Subchapters:

- [What is FLUID](#)
- [Running FLUID Under UNIX](#)
- [Running FLUID Under Microsoft Windows](#)
- [Compiling .fl Files](#)
- [A Short Tutorial](#)
- [FLUID Reference](#)
- [Internationalization with FLUID](#)
- [Known Limitations](#)

## 11.1 What is FLUID?

The Fast Light User Interface Designer, or FLUID, is a graphical editor that is used to produce FLTK source code. FLUID edits and saves its state in .fl files. These files are text, and you can (with care) edit them in a text editor, perhaps to get some special effects.

FLUID can "compile" the .fl file into a .cxx and a .h file. The .cxx file defines all the objects from the .fl file and the .h file declares all the global ones. FLUID also supports localization ([Internationalization](#)) of label strings using message files and the GNU gettext or POSIX catgets interfaces.

A simple program can be made by putting all your code (including a `main()` function) into the .fl file and thus making the .cxx file a single source file to compile. Most programs are more complex than this, so you write other .cxx files that call the FLUID functions. These .cxx files must `#include` the .h file or they can `#include` the .cxx file so it still appears to be a single source file.

Normally the FLUID file defines one or more functions or classes which output C++ code. Each function defines a one or more FLTK windows, and all the widgets that go inside those windows.

Widgets created by FLUID are either "named", "complex named" or "unnamed". A named widget has a legal C++ variable identifier as its name (i.e. only alphanumeric and underscore). In this case FLUID defines a global variable or class member that will point at the widget after the function defining it is called. A complex named object has punctuation such as '.' or '->' or any other symbols in its name. In this case FLUID assigns a pointer to the widget to the name, but does not attempt to declare it. This can be used to get the widgets into structures. An unnamed widget has a blank name and no pointer is stored.

Widgets may either call a named callback function that you write in another source file, or you can supply a small piece of C++ source and FLUID will write a private callback function into the .cxx file.

## 11.2 Running FLUID Under UNIX

To run FLUID under UNIX, type:

```
fluid filename.fl &
```

to edit the `.fl` file `filename.fl`. If the file does not exist you will get an error pop-up, but if you dismiss it you will be editing a blank file of that name. You can run FLUID without any name, in which case you will be editing an unnamed blank setup (but you can use save-as to write it to a file).

You can provide any of the standard FLTK switches before the filename:

```
-display host:n.n
-geometry WxH+X+Y
-title windowtitle
-name classname
-iconic
-fg color
-bg color
-bg2 color
-scheme schemename
```

Changing the colors may be useful to see what your interface will look at if the user calls it with the same switches. Similarly, using `"-scheme plastic"` will show how the interface will look using the "plastic" scheme.

In the current version, if you don't put FLUID into the background with `'&'` then you will be able to abort FLUID by typing `CTRL-C` on the terminal. It will exit immediately, losing any changes.

## 11.3 Running FLUID Under Microsoft Windows

To run FLUID under WIN32, double-click on the `FLUID.exe` file. You can also run FLUID from the Command Prompt window. FLUID always runs in the background under WIN32.

## 11.4 Compiling .fl files

FLUID can also be called as a command-line "compiler" to create the `.cxx` and `.h` file from a `.fl` file. To do this type:

```
fluid -c filename.fl
```

This will read the `filename.fl` file and write `filename.cxx` and `filename.h`. Any leading directory on `filename.fl` will be stripped, so they are always written to the current directory. If there are any errors reading or writing the files, FLUID will print the error and exit with a non-zero code. You can use the following lines in a makefile to automate the creation of the source and header files:

```
my_panels.h my_panels.hxx: my_panels.fl
    fluid -c my_panels.fl
```

Most versions of make support rules that cause `.fl` files to be compiled:

```
.SUFFIXES: .fl .cxx .h
.fl.h .fl.hxx:
    fluid -c $<
```

## 11.5 A Short Tutorial

FLUID is an amazingly powerful little program. However, this power comes at a price as it is not always obvious how to accomplish seemingly simple tasks with it. This tutorial will show you how to generate a complete user interface class with FLUID that is used for the CubeView program provided with FLTK.

The window is of class CubeViewUI, and is completely generated by FLUID, including class member functions. The central display of the cube is a separate subclass of [Fl\\_Gl\\_Window](#) called CubeView. CubeViewUI manages CubeView using callbacks from the various sliders and rollers to manipulate the viewing angle and zoom of CubeView.

At the completion of this tutorial you will (hopefully) understand how to:

1. Use FLUID to create a complete user interface class, including constructor and any member functions necessary.
2. Use FLUID to set callbacks member functions of a custom widget classes.
3. Subclass an [Fl\\_Gl\\_Window](#) to suit your purposes.

### 11.5.1 The CubeView Class

The CubeView class is a subclass of [Fl\\_Gl\\_Window](#). It has methods for setting the zoom, the *x* and *y* pan, and the rotation angle about the *x* and *y* axes.

You can safely skip this section as long as you realize the CubeView is a subclass of [Fl\\_Gl\\_Window](#) and will respond to calls from CubeViewUI, generated by FLUID.

#### The CubeView Class Definition

Here is the CubeView class definition, as given by its header file "test/CubeView.h":

```
class CubeView : public Fl_Gl_Window {
public:
    CubeView(int x,int y,int w,int h,const char *l=0);
    // this value determines the scaling factor used to draw the cube.
    double size;
    /* Set the rotation about the vertical (y ) axis.

This function is called by the horizontal roller in CubeViewUI
and the initialize button in CubeViewUI.
 */
    void v_angle(float angle){vAng=angle;};
    // Return the rotation about the vertical (y ) axis.
    float v_angle(){return vAng;};
    /* Set the rotation about the horizontal (x ) axis.

This function is called by the vertical roller in CubeViewUI
and the
initialize button in CubeViewUI.
 */
    void h_angle(float angle){hAng=angle;};
    // the rotation about the horizontal (x ) axis.
    float h_angle(){return hAng;};
    /* Sets the x shift of the cube view camera.

This function is called by the slider in CubeViewUI and the
initialize button in CubeViewUI.
```

```

        */
void panx(float x){xshift=x;};
/* Sets the y shift of the cube view camera.

This function is called by the slider in CubeViewUI and the
initialize button in CubeViewUI.

        */
void pany(float y){yshift=y;};
/* The widget class draw() override.

The draw() function initialize Gl for another round of
drawing then calls specialized functions for drawing each
of the entities displayed in the cube view.

        */
void draw();

private:
    /* Draw the cube boundaries
Draw the faces of the cube using the boxv[] vertices, using
GL_LINE_LOOP for the faces. The color is #defined by
CUBECOLOR.

        */
void drawCube();

float vAng,hAng; float xshift,yshift;

float boxv0[3];float boxv1[3]; float boxv2[3];float boxv3[3];
float boxv4[3];float boxv5[3]; float boxv6[3];float boxv7[3];
};

}

```

## The CubeView Class Implementation

Here is the CubeView implementation. It is very similar to the "cube" demo included with FLTK.

```

#include "CubeView.h"
#include <math.h>

CubeView::CubeView(int x,int y,int w,int h,const char *l)
    : Fl_Gl_Window(x,y,w,h,l)
{
    vAng = 0.0; hAng=0.0; size=10.0;
    /* The cube definition. These are the vertices of a unit cube
centered on the origin.*/
    boxv0[0] = -0.5; boxv0[1] = -0.5; boxv0[2] = -0.5; boxv1[0] = 0.5;
    boxv1[1] = -0.5; boxv1[2] = -0.5; boxv2[0] = 0.5; boxv2[1] = 0.5;
    boxv2[2] = -0.5; boxv3[0] = -0.5; boxv3[1] = 0.5; boxv3[2] = -0.5;
    boxv4[0] = -0.5; boxv4[1] = -0.5; boxv4[2] = 0.5; boxv5[0] = 0.5;
    boxv5[1] = -0.5; boxv5[2] = 0.5; boxv6[0] = 0.5; boxv6[1] = 0.5;
    boxv6[2] = 0.5; boxv7[0] = -0.5; boxv7[1] = 0.5; boxv7[2] = 0.5;
};

// The color used for the edges of the bounding cube.
#define CUBECOLOR 255,255,255,255

void CubeView::drawCube() {
/* Draw a colored cube */
#define ALPHA 0.5
    glShadeModel(GL_FLAT);

    glBegin(GL_QUADS);
        glColor4f(0.0, 0.0, 1.0, ALPHA);
        glVertex3fv(boxv0);
        glVertex3fv(boxv1);
        glVertex3fv(boxv2);

```

```
glVertex3fv(boxv3);

	glColor4f(1.0, 1.0, 0.0, ALPHA);
	glVertex3fv(boxv0);
	glVertex3fv(boxv4);
	glVertex3fv(boxv5);
	glVertex3fv(boxv1);

	glColor4f(0.0, 1.0, 1.0, ALPHA);
	glVertex3fv(boxv2);
	glVertex3fv(boxv6);
	glVertex3fv(boxv7);
	glVertex3fv(boxv3);

	glColor4f(1.0, 0.0, 0.0, ALPHA);
	glVertex3fv(boxv4);
	glVertex3fv(boxv5);
	glVertex3fv(boxv6);
	glVertex3fv(boxv7);

	glColor4f(1.0, 0.0, 1.0, ALPHA);
	glVertex3fv(boxv0);
	glVertex3fv(boxv3);
	glVertex3fv(boxv7);
	glVertex3fv(boxv4);

	glColor4f(0.0, 1.0, 0.0, ALPHA);
	glVertex3fv(boxv1);
	glVertex3fv(boxv5);
	glVertex3fv(boxv6);
	glVertex3fv(boxv2);
	glEnd();

	glColor3f(1.0, 1.0, 1.0);
	glBegin(GL_LINES);
	glVertex3fv(boxv0);
	glVertex3fv(boxv1);

	glVertex3fv(boxv1);
	glVertex3fv(boxv2);

	glVertex3fv(boxv2);
	glVertex3fv(boxv3);

	glVertex3fv(boxv3);
	glVertex3fv(boxv0);

	glVertex3fv(boxv4);
	glVertex3fv(boxv5);

	glVertex3fv(boxv5);
	glVertex3fv(boxv6);

	glVertex3fv(boxv6);
	glVertex3fv(boxv7);

	glVertex3fv(boxv7);
	glVertex3fv(boxv4);

	glVertex3fv(boxv0);
	glVertex3fv(boxv4);

	glVertex3fv(boxv1);
	glVertex3fv(boxv5);

	glVertex3fv(boxv2);
	glVertex3fv(boxv6);
```

```

glVertex3fv(boxv3);
glVertex3fv(boxv7);
glEnd();
};//drawCube

void CubeView::draw() {
    if (!isValid()) {
        glLoadIdentity(); glViewport(0,0,w(),h());
        glOrtho(-10,10,-10,10,-20000,10000); glEnable(GL_BLEND);
        glBlendFunc(GL_SRC_ALPHA, GL_ONE_MINUS_SRC_ALPHA);
    }

    glClear(GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT);
    glPushMatrix(); glTranslatef(xshift, yshift, 0);
    glRotatef(hAng,0,1,0); glRotatef(vAng,1,0,0);
    glScalef(float(size),float(size),float(size)); drawCube();
    glPopMatrix();
}

```

### 11.5.2 The CubeViewUI Class

We will completely construct a window to display and control the CubeView defined in the previous section using FLUID.

#### Defining the CubeViewUI Class

Once you have started FLUID, the first step in defining a class is to create a new class within FLUID using the *New->Code->Class* menu item. Name the class "CubeViewUI" and leave the subclass blank. We do not need any inheritance for this window. You should see the new class declaration in the FLUID browser window.

#### Adding the Class Constructor

Click on the CubeViewUI class in the FLUID window and add a new method by selecting **New->Code->Function/Method**. The name of the function will also be CubeViewUI. FLUID will understand that this will be the constructor for the class and will generate the appropriate code. Make sure you declare the constructor public.

Then add a window to the CubeViewUI class. Highlight the name of the constructor in the FLUID browser window and click on **New->Group->Window**. In a similar manner add the following to the CubeViewUI constructor:

- A horizontal roller named hrot
- A vertical roller named vrot
- A horizontal slider named xpan
- A vertical slider named ypan
- A horizontal value slider named zoom

None of these additions need be public. And they shouldn't be unless you plan to expose them as part of the interface for CubeViewUI.

When you are finished you should have something like this:

We will talk about the `show()` method that is highlighted shortly.

### **Adding the CubeView Widget**

What we have is nice, but does little to show our cube. We have already defined the CubeView class and we would like to show it within the CubeViewUI.

The CubeView class inherits the `Fl_Gl_Window` class, which is created in the same way as a `Fl_Box` widget. Use **New->Other->Box** to add a square box to the main window. This will be no ordinary box, however.

The Box properties window will appear. The key to letting CubeViewUI display CubeView is to enter CubeView in the "Class:" text entry box. This tells FLUID that it is not an `Fl_Box`, but a similar widget with the same constructor.

In the "Extra Code:" field enter `#include "CubeView.h"`

This `#include` is important, as we have just included CubeView as a member of CubeViewUI, so any public CubeView methods are now available to CubeViewUI.

### **Defining the Callbacks**

Each of the widgets we defined before adding CubeView can have callbacks that call CubeView methods. You can call an external function or put in a short amount of code in the "Callback" field of the widget panel. For example, the callback for the ypan slider is:

```
cube->pany(((Fl_Slider *)o)->value());
cube->redraw();
```

We call `cube->redraw()` after changing the value to update the CubeView window. CubeView could easily be modified to do this, but it is nice to keep this exposed in the case where you may want to do more than one view change only redrawing once saves a lot of time.

There is no reason no wait until after you have added CubeView to enter these callbacks. FLUID assumes you are smart enough not to refer to members or functions that don't exist.

### **Adding a Class Method**

You can add class methods within FLUID that have nothing to do with the GUI. An example add a `show` function so that CubeViewUI can actually appear on the screen.

Make sure the top level CubeViewUI is selected and select **New->Code->Function/Method**. Just use the name `show()`. We don't need a return value here, and since we will not be adding any widgets to this method FLUID will assign it a return type of `void`.

Once the new method has been added, highlight its name and select **New->Code->Code**. Enter the method's code in the code window.

### 11.5.3 Adding Constructor Initialization Code

If you need to add code to initialize class, for example setting initial values of the horizontal and vertical angles in the CubeView, you can simply highlight the Constructor and select **New->Code->Code**. Add any required code.

### 11.5.4 Generating the Code

Now that we have completely defined the CubeViewUI, we have to generate the code. There is one last trick to ensure this all works. Open the preferences dialog from **Edit->Preferences**.

At the bottom of the preferences dialog box is the key: "Include Header from Code". Select that option and set your desired file extensions and you are in business. You can include the CubeViewUI.h (or whatever extension you prefer) as you would any other C++ class.

## 11.6 FLUID Reference

The following sections describe each of the windows in FLUID.

### 11.6.1 The Widget Browser

The main window shows a menu bar and a scrolling browser of all the defined widgets. The name of the .fl file being edited is shown in the window title.

The widgets are stored in a hierarchy. You can open and close a level by clicking the "triangle" at the left of a widget. The leftmost widgets are the *parents*, and all the widgets listed below them are their *children*. Parents don't have to have any children.

The top level of the hierarchy is composed of *functions* and *classes*. Each of these will produce a single C++ public function or class in the output .cxx file. Calling the function or instantiating the class will create all of the child widgets.

The second level of the hierarchy contains the *windows*. Each of these produces an instance of class [F1\\_Window](#).

Below that are either *widgets* (subclasses of [F1\\_Widget](#)) or *groups* of widgets (including other groups). Plain groups are for layout, navigation, and resize purposes. *Tab groups* provide the well-known file-card tab interface.

Widgets are shown in the browser by either their *name* (such as "main\_panel" in the example), or by their *type* and *label* (such as "Button "the green"").

You *select* widgets by clicking on their names, which highlights them (you can also select widgets from any displayed window). You can select many widgets by dragging the mouse across them, or by using Shift+Click to toggle them on and off. To select no widgets, click in the blank area under the last widget. Note that hidden children may be selected even when there is no visual indication of this.

You *open* widgets by double-clicking on them, or (to open several widgets you have picked) by typing the F1 key. A control panel will appear so you can change the widget(s).

### 11.6.2 Menu Items

The menu bar at the top is duplicated as a pop-up menu on any displayed window. The shortcuts for all the menu items work in any window. The menu items are:

**File/Open... (Ctrl+o)**

Discards the current editing session and reads in a different .fl file. You are asked for confirmation if you have changed the current file.

FLUID can also read .fd files produced by the Forms and XForms "fdesign" programs. It is best to File/Merge them instead of opening them. FLUID does not understand everything in a .fd file, and will print a warning message on the controlling terminal for all data it does not understand. You will probably need to edit the resulting setup to fix these errors. Be careful not to save the file without changing the name, as FLUID will write over the .fd file with its own format, which fdesign cannot read!

**File/Insert... (Ctrl+i)**

Inserts the contents of another .fl file, without changing the name of the current .fl file. All the functions (even if they have the same names as the current ones) are added, and you will have to use cut/paste to put the widgets where you want.

**File/Save (Ctrl+s)**

Writes the current data to the .fl file. If the file is unnamed then FLUID will ask for a filename.

**File/Save As... (Ctrl+Shift+S)**

Asks for a new filename and saves the file.

**File/Write Code (Ctrl+Shift+C)**

"Compiles" the data into a .cxx and .h file. These are exactly the same as the files you get when you run FLUID with the -c switch.

The output file names are the same as the .fl file, with the leading directory and trailing ".fl" stripped, and ".h" or ".cxx" appended.

**File/Write Strings (Ctrl+Shift+W)**

Writes a message file for all of the text labels defined in the current file.

The output file name is the same as the .fl file, with the leading directory and trailing ".fl" stripped, and ".txt", ".po", or ".msg" appended depending on the [Internationalization Mode](#).

**File/Quit (Ctrl+q)**

Exits FLUID. You are asked for confirmation if you have changed the current file.

**Edit/Undo (Ctrl+z)**

This isn't implemented yet. You should do save often so you can recover from any mistakes you make.

**Edit/Cut (Ctrl+x)**

Deletes the selected widgets and all of their children. These are saved to a "clipboard" file and can be pasted back into any FLUID window.

**Edit/Copy (Ctrl+c)**

Copies the selected widgets and all of their children to the "clipboard" file.

**Edit/Paste (Ctrl+v)**

Pastes the widgets from the clipboard file.

If the widget is a window, it is added to whatever function is selected, or contained in the current selection.

If the widget is a normal widget, it is added to whatever window or group is selected. If none is, it is added to the window or group that is the parent of the current selection.

To avoid confusion, it is best to select exactly one widget before doing a paste.

Cut/paste is the only way to change the parent of a widget.

**Edit>Select All (Ctrl+a)**

Selects all widgets in the same group as the current selection.

If they are all selected already then this selects all widgets in that group's parent. Repeatedly typing Ctrl+a will select larger and larger groups of widgets until everything is selected.

**Edit/Open... (F1 or double click)**

Displays the current widget in the attributes panel. If the widget is a window and it is not visible then the window is shown instead.

**Edit/Sort**

Sorts the selected widgets into left to right, top to bottom order. You need to do this to make navigation keys in FLTK work correctly. You may then fine-tune the sorting with "Earlier" and "Later". This does not affect the positions of windows or functions.

**Edit/Earlier (F2)**

Moves all of the selected widgets one earlier in order among the children of their parent (if possible). This will affect navigation order, and if the widgets overlap it will affect how they draw, as the later widget is drawn on top of the earlier one. You can also use this to reorder functions, classes, and windows within functions.

**Edit/Later (F3)**

Moves all of the selected widgets one later in order among the children of their parent (if possible).

**Edit/Group (F7)**

Creates a new [F1\\_Group](#) and make all the currently selected widgets children of it.

**Edit/Ungroup (F8)**

Deletes the parent group if all the children of a group are selected.

**Edit/Overlays on/off (Ctrl+Shift+O)**

Toggles the display of the red overlays off, without changing the selection. This makes it easier to see box borders and how the layout looks. The overlays will be forced back on if you change the selection.

**Edit/Project Settings... (Ctrl+p)**

Displays the project settings panel. The output filenames control the extensions or names of the files the are generated by FLUID. If you check the "Include .h from .cxx" button the code file will include the header file automatically.

The internationalization options are described [later in this chapter](#).

**Edit/GUI Settings... (Shift+Ctrl+p)**

Displays the GUI settings panel. This panel is used to control the user interface settings.

**New/Code/Function**

Creates a new C function. You will be asked for a name for the function. This name should be a legal C++ function template, without the return type. You can pass arguments which can be referred to by code you type into the individual widgets.

If the function contains any unnamed windows, it will be declared as returning a `Fl_Window` pointer. The unnamed window will be returned from it (more than one unnamed window is useless). If the function contains only named windows, it will be declared as returning nothing (`void`).

It is possible to make the `.cxx` output be a self-contained program that can be compiled and executed. This is done by deleting the function name so `main(argc, argv)` is used. The function will call `show()` on all the windows it creates and then call `Fl::run()`. This can also be used to test resize behavior or other parts of the user interface.

You can change the function name by double-clicking on the function.

### New/Window

Creates a new `Fl_Window` widget. The window is added to the currently selected function, or to the function containing the currently selected item. The window will appear, sized to 100x100. You can resize it to whatever size you require.

The widget panel will also appear and is described later in this chapter.

### New/...

All other items on the New menu are subclasses of `Fl_Widget`. Creating them will add them to the currently selected group or window, or the group or window containing the currently selected widget. The initial dimensions and position are chosen by copying the current widget, if possible.

When you create the widget you will get the widget's control panel, which is described later in this chapter.

### Layout/Align/...

Align all selected widgets to the first widget in the selection.

### Layout/Space Evenly/...

Space all selected widgets evenly inside the selected space. Widgets will be sorted from first to last.

### Layout/Make Same Size/...

Make all selected widgets the same size as the first selected widget.

### Layout/Center in Group/...

Center all selected widgets relative to their parent widget

#### **Layout/Grid... (Ctrl+g)**

Displays the grid settings panel. This panel controls the grid that all widgets snap to when you move and resize them, and for the "snap" which is how far a widget has to be dragged from its original position to actually change.

#### **Shell/Execute Command... (Alt+x)**

Displays the shell command panel. The shell command is commonly used to run a 'make' script to compile the FLTK output.

#### **Shell/Execute Again (Alt+g)**

Run the shell command again.

#### **Help/About FLUID**

Pops up a panel showing the version of FLUID.

#### **Help/On FLUID**

Shows this chapter of the manual.

#### **Help/Manual**

Shows the contents page of the manual

### **11.6.3 The Widget Panel**

When you double-click on a widget or a set of widgets you will get the "widget attribute panel".

When you change attributes using this panel, the changes are reflected immediately in the window. It is useful to hit the "no overlay" button (or type Ctrl+Shift+O) to hide the red overlay so you can see the widgets more accurately, especially when setting the box type.

If you have several widgets selected, they may have different values for the fields. In this case the value for *one* of the widgets is shown. But if you change this value, *all* of the selected widgets are changed to the new value.

Hitting "OK" makes the changes permanent. Selecting a different widget also makes the changes permanent. FLUID checks for simple syntax errors such as mismatched parenthesis in any code before saving any text.

"Revert" or "Cancel" put everything back to when you last brought up the panel or hit OK. However in the current version of FLUID, changes to "visible" attributes (such as the color, label, box) are not undone by revert or cancel. Changes to code like the callbacks are undone, however.

## 11.7 GUI Attributes

### Label (text field)

String to print next to or inside the button. You can put newlines into the string to make multiple lines. The easiest way is by typing Ctrl+j.

Symbols can be added to the label using the at sign ("@").

### Label (pull down menu)

How to draw the label. Normal, shadowed, engraved, and embossed change the appearance of the text.

### Image

The active image for the widget. Click on the **Browse...** button to pick an image file using the file chooser.

### Inactive

The inactive image for the widget. Click on the **Browse...** button to pick an image file using the file chooser.

### Alignment (buttons)

Where to draw the label. The arrows put it on that side of the widget, you can combine the to put it in the corner. The "box" button puts the label inside the widget, rather than outside.

The **clip** button clips the label to the widget box, the **wrap** button wraps any text in the label, and the **text image** button puts the text over the image instead of under the image.

### Position (text fields)

The position fields show the current position and size of the widget box. Enter new values to move and/or resize a widget.

### Values (text fields)

The values and limits of the current widget. Depending on the type of widget, some or all of these fields may be inactive.

### Shortcut

The shortcut key to activate the widget. Click on the shortcut button and press any key sequence to set the shortcut.

### Attributes (buttons)

The **Visible** button controls whether the widget is visible (on) or hidden (off) initially. Don't change this for windows or for the immediate children of a Tabs group.

The **Active** button controls whether the widget is activated (on) or deactivated (off) initially. Most widgets appear greyed out when deactivated.

The **Resizable** button controls whether the window is resizeable. In addition all the size changes of a window or group will go "into" the resizable child. If you have a large data display surrounded by buttons, you probably want that data area to be resizable. You can get more complex behavior by making invisible boxes the resizable widget, or by using hierarchies of groups. Unfortunately the only way to test it is to compile the program. Resizing the FLUID window is *not* the same as what will happen in the user program.

The **Hotspot** button causes the parent window to be positioned with that widget centered on the mouse. This position is determined *when the FLUID function is called*, so you should call it immediately before showing the window. If you want the window to hide and then reappear at a new position, you should have your program set the hotspot itself just before `show()`.

The **Border** button turns the window manager border on or off. On most window managers you will have to close the window and reopen it to see the effect.

### X Class (text field)

The string typed into here is passed to the X window manager as the class. This can change the icon or window decorations. On most (all?) window managers you will have to close the window and reopen it to see the effect.

#### 11.7.1 Style Attributes

##### Label Font (pulldown menu)

Font to draw the label in. Ignored by symbols, bitmaps, and pixmaps. Your program can change the actual font used by these "slots" in case you want some font other than the 16 provided.

##### Label Size (pulldown menu)

Pixel size (height) for the font to draw the label in. Ignored by symbols, bitmaps, and pixmaps. To see the result without dismissing the panel, type the new number and then Tab.

**Label Color (button)**

Color to draw the label. Ignored by pixmaps (bitmaps, however, do use this color as the foreground color).

**Box (pulldown menu)**

The boxtyle to draw as a background for the widget.

Many widgets will work, and draw faster, with a "frame" instead of a "box". A frame does not draw the colored interior, leaving whatever was already there visible. Be careful, as FLUID may draw this ok but the real program may leave unwanted stuff inside the widget.

If a window is filled with child widgets, you can speed up redrawing by changing the window's box type to "NO\_BOX". FLUID will display a checkerboard for any areas that are not colored in by boxes. Note that this checkerboard is not drawn by the resulting program. Instead random garbage will be displayed.

**Down Box (pulldown menu)**

The boxtyle to draw when a button is pressed or for some parts of other widgets like scrollbars and valuators.

**Color (button)**

The color to draw the box with.

**Select Color (button)**

Some widgets will use this color for certain parts. FLUID does not always show the result of this: this is the color buttons draw in when pushed down, and the color of input fields when they have the focus.

**Text Font, Size, and Color**

Some widgets display text, such as input fields, pull-down menus, and browsers.

## 11.7.2 C++ Attributes

**Class**

This is how you use your own subclasses of [Fl\\_Widget](#). Whatever identifier you type in here will be the class that is instantiated.

In addition, no `#include` header file is put in the `.h` file. You must provide a `#include` line as the first line of the "Extra Code" which declares your subclass.

The class must be similar to the class you are spoofing. It does not have to be a subclass. It is sometimes useful to change this to another FLTK class. Currently the only way to get a double-buffered window is to change this field for the window to "Fl\_Double\_Window" and to add

```
"#include <FL/Fl_Double_Window.h>
```

to the extra code.

#### Type (upper-right pulldown menu)

Some classes have subtypes that modify their appearance or behavior. You pick the subtype off of this menu.

#### Name (text field)

Name of a variable to declare, and to store a pointer to this widget into. This variable will be of type "`<class>*`". If the name is blank then no variable is created.

You can name several widgets with "name[0]", "name[1]", "name[2]", etc. This will cause FLUID to declare an array of pointers. The array is big enough that the highest number found can be stored. All widgets that in the array must be the same type.

#### Public (button)

Controls whether the widget is publicly accessible. When embedding widgets in a C++ class, this controls whether the widget is `public` or `private` in the class. Otherwise it controls whether the widget is declared `static` or `global` (`extern`).

#### Extra Code (text fields)

These four fields let you type in literal lines of code to dump into the `.h` or `.cxx` files.

If the text starts with a `#` or the word `extern` then FLUID thinks this is an "include" line, and it is written to the `.h` file. If the same include line occurs several times then only one copy is written.

All other lines are "code" lines. The current widget is pointed to by the local variable `o`. The window being constructed is pointed to by the local variable `w`. You can also access any arguments passed to the function here, and any named widgets that are before this one.

FLUID will check for matching parenthesis, braces, and quotes, but does not do much other error checking. Be careful here, as it may be hard to figure out what widget is producing an error in the compiler. If you need more than four lines you probably should call a function in your own `.cxx` code.

#### Callback (text field)

This can either be the name of a function, or a small snippet of code. If you enter anything but letters, numbers, and the underscore then FLUID treats it as code.

A name names a function in your own code. It must be declared as `void name(<class>*, void*)`.

A code snippet is inserted into a static function in the `.cxx` output file. The function prototype is `void name(class *o, void *v)` so that you can refer to the widget as `o` and the `user_data()` as `v`. FLUID will check for matching parenthesis, braces, and quotes, but does not do much other error checking. Be careful here, as it may be hard to figure out what widget is producing an error in the compiler.

If the callback is blank then no callback is set.

#### User Data (text field)

This is a value for the `user_data()` of the widget. If blank the default value of zero is used. This can be any piece of C code that can be cast to a `void` pointer.

#### Type (text field)

The `void *` in the callback function prototypes is replaced with this. You may want to use `long` for old XForms code. Be warned that anything other than `void *` is not guaranteed to work! However on most architectures other pointer types are ok, and `long` is usually ok, too.

#### When (pulldown menu)

When to do the callback. This can be **Never**, **Changed**, **Release**, or **Enter Key**. The value of **Enter Key** is only useful for text input fields.

There are other rare but useful values for the `when()` field that are not in the menu. You should use the extra code fields to put these values in.

#### No Change (button)

The **No Change** button means the callback is done on the matching event even if the data is not changed.

## 11.8 Selecting and Moving Widgets

Double-clicking a window name in the browser will display it, if not displayed yet. From this display you can select widgets, sets of widgets, and move or resize them. To close a window either double-click it or type `ESC`.

To select a widget, click it. To select several widgets drag a rectangle around them. Holding down shift will toggle the selection of the widgets instead.

You cannot pick hidden widgets. You also cannot choose some widgets if they are completely overlapped by later widgets. Use the browser to select these widgets.

The selected widgets are shown with a red "overlay" line around them. You can move the widgets by dragging this box. Or you can resize them by dragging the outer edges and corners. Hold down the Alt key while dragging the mouse to defeat the snap-to-grid effect for fine positioning.

If there is a tab box displayed you can change which child is visible by clicking on the file tabs. The child you pick is selected.

The arrow, tab, and shift+tab keys "navigate" the selection. Left, right, tab, or shift+tab move to the next or previous widgets in the hierarchy. Hit the right arrow enough and you will select every widget in the window. Up/down widgets move to the previous/next widgets that overlap horizontally. If the navigation does not seem to work you probably need to "Sort" the widgets. This is important if you have input fields, as FLTK uses the same rules when using arrow keys to move between input fields.

To "open" a widget, double click it. To open several widgets select them and then type F1 or pick "Edit/Open" off the pop-up menu.

Type Ctrl+o to temporarily toggle the overlay off without changing the selection, so you can see the widget borders.

You can resize the window by using the window manager border controls. FLTK will attempt to round the window size to the nearest multiple of the grid size and makes it big enough to contain all the widgets (it does this using illegal X methods, so it is possible it will barf with some window managers!). Notice that the actual window in your program may not be resizable, and if it is, the effect on child widgets may be different.

The panel for the window (which you get by double-clicking it) is almost identical to the panel for any other [Fl\\_Widget](#). There are three extra items:

## 11.9 Image Labels

The *contents* of the image files in the **Image** and **Inactive** text fields are written to the .cxx file. If many widgets share the same image then only one copy is written. Since the image data is embedded in the generated source code, you need only distribute the C++ code and not the image files themselves.

However, the *filenames* are stored in the .fl file so you will need the image files as well to read the .fl file. Filenames are relative to the location of the .fl file and not necessarily the current directory. We recommend you either put the images in the same directory as the .fl file, or use absolute path names.

### Notes for All Image Types

FLUID runs using the default visual of your X server. This may be 8 bits, which will give you dithered images. You may get better results in your actual program by adding the code "Fl::visual(FL\_RGB)" to your code right before the first window is displayed.

All widgets with the same image on them share the same code and source X pixmap. Thus once you have put an image on a widget, it is nearly free to put the same image on many other widgets.

If you edit an image at the same time you are using it in FLUID, the only way to convince FLUID to read the image file again is to remove the image from all widgets that are using it or re-load the .fl file.

Don't rely on how FLTK crops images that are outside the widget, as this may change in future versions! The cropping of inside labels will probably be unchanged.

To more accurately place images, make a new "box" widget and put the image in that as the label.

### XBM (X Bitmap) Files

FLUID reads X bitmap files which use C source code to define a bitmap. Sometimes they are stored with the ".h" or ".bm" extension rather than the standard ".xbm" extension.

FLUID writes code to construct an [Fl\\_Bitmap](#) image and use it to label the widget. The '1' bits in the bitmap are drawn using the label color of the widget. You can change this color in the FLUID widget attributes panel. The '0' bits are transparent.

The program "bitmap" on the X distribution does an adequate job of editing bitmaps.

### XPM (X Pixmap) Files

FLUID reads X pixmap files as used by the `libxpm` library. These files use C source code to define a pixmap. The filenames usually have the ".xpm" extension.

FLUID writes code to construct an [Fl\\_Pixmap](#) image and use it to label the widget. The label color of the widget is ignored, even for 2-color images that could be a bitmap. XPM files can mark a single color as being transparent, and FLTK uses this information to generate a transparency mask for the image.

We have not found any good editors for small iconic pictures. For pixmaps we have used [XPaint](#) and the KDE icon editor.

### BMP Files

FLUID reads Windows BMP image files which are often used in WIN32 applications for icons. FLUID converts BMP files into (modified) XPM format and uses a [Fl\\_BMP\\_Image](#) image to label the widget. Transparency is handled the same as for XPM files. All image data is uncompressed when written to the source file, so the code may be much bigger than the .bmp file.

### GIF Files

FLUID reads GIF image files which are often used in HTML documents to make icons. FLUID converts GIF files into (modified) XPM format and uses a [Fl\\_GIF\\_Image](#) image to label the widget. Transparency is handled the same as for XPM files. All image data is uncompressed when written to the source file, so the code may be much bigger than the .gif file. Only the first image of an animated GIF file is used.

### JPEG Files

If FLTK is compiled with JPEG support, FLUID can read JPEG image files which are often used for digital photos. FLUID uses a [Fl\\_JPEG\\_Image](#) image to label the widget, and writes uncompressed RGB or grayscale data to the source file.

### PNG (Portable Network Graphics) Files

If FLTK is compiled with PNG support, FLUID can read PNG image files which are often used in HTML documents. FLUID uses a `FL_PNG_Image` image to label the widget, and writes uncompressed RGB or grayscale data to the source file. PNG images can provide a full alpha channel for partial transparency, and FLTK supports this as best as possible on each platform.

## 11.10 Internationalization with FLUID

FLUID supports internationalization (I18N for short) of label strings used by widgets. The preferences window (`Ctrl+p`) provides access to the I18N options.

### 11.10.1 I18N Methods

FLUID supports three methods of I18N: use none, use GNU gettext, and use POSIX catgets. The "use none" method is the default and just passes the label strings as-is to the widget constructors.

The "GNU gettext" method uses GNU gettext (or a similar text-based I18N library) to retrieve a localized string before calling the widget constructor.

The "POSIX catgets" method uses the POSIX catgets function to retrieve a numbered message from a message catalog before calling the widget constructor.

### 11.10.2 Using GNU gettext for I18N

FLUID's code support for GNU gettext is limited to calling a function or macro to retrieve the localized label; you still need to call `setlocale()` and `textdomain()` or `bindtextdomain()` to select the appropriate language and message file.

To use GNU gettext for I18N, open the preferences window and choose "GNU gettext" from the "Use" chooser. Two new input fields will then appear to control the include file and function/macro name to use when retrieving the localized label strings.

The "\#include" field controls the header file to include for I18N; by default this is `<libintl.h>`, the standard I18N file for GNU gettext.

The "Function" field controls the function (or macro) that will retrieve the localized message; by default the `gettext` function will be called.

### 11.10.3 Using POSIX catgets for I18N

FLUID's code support for POSIX catgets allows you to use a global message file for all interfaces or a file specific to each `.fl` file; you still need to call `setlocale()` to select the appropriate language.

To use POSIX catgets for I18N, open the preferences window and choose "POSIX catgets" from the "Use" chooser. Three new input fields will then appear to control the include file, catalog file, and set number for retrieving the localized label strings.

The "\#include" field controls the header file to include for I18N; by default this is `<nl_types.h>`, the standard I18N file for POSIX catgets.

The "File" field controls the name of the catalog file variable to use when retrieving localized messages; by default the file field is empty which forces a local (static) catalog file to be used for all of the windows defined in your `.fl` file.

The "Set" field controls the set number in the catalog file. The default set is 1 and rarely needs to be changed.

## **11.11 Known limitations**

Declaration Blocks can be used to temporarily block out already designed code using `#if 0` and `#endif` type construction. This will effectively avoid compilation of blocks of code. However, static code and data generated by this segment (menu items, images, include statements, etc.) will still be generated and likely cause compile-time warnings.



## **Chapter 12**

### **10 - Advanced FLTK**

This chapter explains advanced programming and design topics that will help you to get the most out of FLTK.

## 12.1 Multithreading

FLTK supports multithreaded application using a locking mechanism based on "pthreads". We do not provide a threading interface as part of the library. However a simple example how threads can be implemented for all supported platforms can be found in `test/thread.h` and `test/thread.cxx`.

To use the locking mechanism, FLTK must be compiled with `-enable-threads` set during the `configure` process. IDE-based versions of FLTK are automatically compiled with locking enabled if possible.

In `main()`, call `Fl::lock()` before `Fl::run()` or `Fl::wait()` to start the runtime multithreading support for your program. All callbacks and derived functions like `handle()` and `draw()` will now be properly locked:

```
}
```

```
int main() {
    Fl::lock();
    /* run thread */
    while (Fl::wait() > 0) {
        if (Fl::thread_message()) {
            /* process your data */
        }
    }
}
```

You can now start as many threads as you like. From within a thread (other than the main thread) FLTK calls must be wrapped with calls to `Fl::lock()` and `Fl::unlock()`:

```
Fl::lock();      // avoid conflicting calls
...
Fl::unlock();   // allow other threads to access FLTK again
```

You can send messages from child threads to the main thread using `Fl::awake(msg)`:

```
void *msg;       // "msg" is a pointer to your message
Fl::awake(msg); // send "msg" to main thread
```

You can also tell the main thread to call a function for you as soon as possible by using `Fl::awake(callback, userdata)`:

```
void do_something(void *userdata) {
    // running with the main thread
}

// running in another thread
void *data;      // "data" is a pointer to your user data
Fl::awake(do_something, data); // call something in main thread
```

FLTK supports multiple platforms, some of them which do not allow any other but the main thread to handle system events and open or close windows. The safe thing to do is to adhere to the following rules for threads on all operating systems:

- Don't `show()` or `hide()` anything that contains widgets derived from `F1_Window`, including dialogs, file choosers, subwindows or `F1_GL_Windows`
- Don't call `F1::wait()`, `F1::flush()` or any related methods that will handle system messages
- Don't start or cancel timers
- Don't change window decorations or titles
- The `make_current()` method may or may not work well for regular windows, but should always work for `F1_GL_Windows` to allow for high speed rendering on graphics cards with multiple pipelines

See also: `void awake(void *message)`, `void lock()`, `void *thread_message()`, `void unlock()`.



## **Chapter 13**

### **11 - Unicode and utf-8 Support**

This chapter explains how FLTK handles international text via Unicode and utf-8.

Unicode support was only recently added to FLTK and is still incomplete. This chapter is Work in Progress, reflecting the current state of Unicode support.

## 13.1 About Unicode and utf-8

The Unicode Standard is a worldwide accepted character encoding standard. Unicode provides access to over 100,000 characters used in all the major languages written today.

Utf-8 encodes all Unicode characters into variable length sequences of bytes. Unicode characters in the 7-bit ASCII range map to the same value in utf-8, making the transformation to Unicode quick and easy.

Moving from ASCII encoding to Unicode will allow all new FLTK applications to be easily internationalized and used all over the world. By choosing utf-8 encoding, FLTK remains largely source-code compatible to previous iteration of the library.

## 13.2 Unicode in FLTK

FLTK will be entirely converted to Unicode in utf-8 encoding. If a different encoding is required by the underlying operating system, FLTK will convert string as needed.

### TODO:

- more doc on unicode, add links
- write something about filename encoding on OS X...
- explain the `fl_utf8_...` commands
- explain issues with [Fl\\_Preferences](#)
- why FLTK has no `Fl_String` class

### DONE:

- initial transfer of the Ian/O'ksi'D patch
- adapted Makefiles and IDEs for available platforms
- hacked some Unicode keyboard entry for OS X

### ISSUES:

- IDEs:
  - Makefile support: tested on Fedora Core 5 and OS X, but heaven knows on which platforms this may fail
  - Xcode: tested, seems to be working (but see comments below on OS X)

- VisualC (VC6): tested, test(utf8) works, but may have had some issues during merge. Some additional work needed (imm32.lib)
  - VisualStudio2005: tested, test(utf8) works, some addtl. work needed (imm32.lib)
  - VisualCNet: sorry, I have no longer access to that IDE
  - Borland and other compiler: sorry, I can't update those
- Platforms:
    - you will encounter problems on all platforms!
    - X11: many characters are missing, but that may be related to bad fonts on my machine. I also could not do any keyboard tests yet. Rendering seems to generally work ok.
    - Win32: US and German keyboard worked ok, but no compositing was tested. Rendering looks pretty good.
    - OS X: redering looks good. Keyboard is completely messed up, even in US setting (with Alt key)
    - all: while merging I have seen plenty of places that are not entirley utf8-safe, particularly [Fl\\_Input](#), [Fl\\_Text\\_Editor](#), and [Fl\\_Help\\_View](#). Keycodes from the keyboard conflict with Unicode characters. Right-to-left rendered text can not be marked or edited, and probably much more.



## **Chapter 14**

### **C - FLTK Enumerations**

**Note:**

This file is not actively maintained any more, but is left here as a reference, until the doxygen documentation is completed.

**See also:**

[FL/Enumerations.H](#).

This appendix lists the enumerations provided in the <[FL/Enumerations.H](#)> header file, organized by section. Constants whose value is zero are marked with "(0)", this is often useful to know when programming.

## 14.1 Version Numbers

The FLTK version number is stored in a number of compile-time constants:

- `FL_MAJOR_VERSION` - The major release number, currently 1.
- `FL_MINOR_VERSION` - The minor release number, currently 3.
- `FL_PATCH_VERSION` - The patch release number, currently 0.
- `FL_VERSION` - A combined floating-point version number for the major, minor, and patch release numbers, currently 1.0300.

## 14.2 Events

Events are identified by an `Fl_Event` enumeration value. The following events are currently defined:

- `FL_NO_EVENT` - No event (or an event fltk does not understand) occurred (0).
- `FL_PUSH` - A mouse button was pushed.
- `FL_RELEASE` - A mouse button was released.
- `FL_ENTER` - The mouse pointer entered a widget.
- `FL_LEAVE` - The mouse pointer left a widget.
- `FL_DRAG` - The mouse pointer was moved with a button pressed.
- `FL_FOCUS` - A widget should receive keyboard focus.
- `FL_UNFOCUS` - A widget loses keyboard focus.
- `FL_KEYBOARD` - A key was pressed.
- `FL_CLOSE` - A window was closed.
- `FL_MOVE` - The mouse pointer was moved with no buttons pressed.
- `FL_SHORTCUT` - The user pressed a shortcut key.
- `FL_DEACTIVATE` - The widget has been deactivated.
- `FL_ACTIVATE` - The widget has been activated.

- `FL_HIDE` - The widget has been hidden.
- `FL_SHOW` - The widget has been shown.
- `FL_PASTE` - The widget should paste the contents of the clipboard.
- `FL_SELECTIONCLEAR` - The widget should clear any selections made for the clipboard.
- `FL_MOUSEWHEEL` - The horizontal or vertical mousewheel was turned.
- `FL_DND_ENTER` - The mouse pointer entered a widget dragging data.
- `FL_DND_DRAG` - The mouse pointer was moved dragging data.
- `FL_DND_LEAVE` - The mouse pointer left a widget still dragging data.
- `FL_DND_RELEASE` - Dragged data is about to be dropped.

## 14.3 Callback "When" Conditions

The following constants determine when a callback is performed:

- `FL_WHEN_NEVER` - Never call the callback (0).
- `FL_WHEN_CHANGED` - Do the callback only when the widget value changes.
- `FL_WHEN_NOT_CHANGED` - Do the callback whenever the user interacts with the widget.
- `FL_WHEN_RELEASE` - Do the callback when the button or key is released and the value changes.
- `FL_WHEN_ENTER_KEY` - Do the callback when the user presses the ENTER key and the value changes.
- `FL_WHEN_RELEASE_ALWAYS` - Do the callback when the button or key is released, even if the value doesn't change.
- `FL_WHEN_ENTER_KEY_ALWAYS` - Do the callback when the user presses the ENTER key, even if the value doesn't change.

## 14.4 Fl::event\_button() Values

The following constants define the button numbers for `FL_PUSH` and `FL_RELEASE` events:

- `FL_LEFT_MOUSE` - the left mouse button
- `FL_MIDDLE_MOUSE` - the middle mouse button
- `FL_RIGHT_MOUSE` - the right mouse button

## 14.5 Fl::event\_key() Values

The following constants define the non-ASCII keys on the keyboard for `FL_KEYBOARD` and `FL_SHORTCUT` events:

- `FL_Button` - A mouse button; use `FL_Button` + n for mouse button n.
- `FL_Backspace` - The backspace key.
- `FL_Tab` - The tab key.
- `FL_Enter` - The enter key.
- `FL_Pause` - The pause key.
- `FL_Scroll_Lock` - The scroll lock key.
- `FL_Escape` - The escape key.
- `FL_Home` - The home key.
- `FL_Left` - The left arrow key.
- `FL_Up` - The up arrow key.
- `FL_Right` - The right arrow key.
- `FL_Down` - The down arrow key.
- `FL_Page_Up` - The page-up key.
- `FL_Page_Down` - The page-down key.
- `FL_End` - The end key.
- `FL_Print` - The print (or print-screen) key.
- `FL_Insert` - The insert key.
- `FL_Menu` - The menu key.
- `FL_Num_Lock` - The num lock key.
- `FL_KP` - One of the keypad numbers; use `FL_KP` + n for number n.
- `FL_KP_Enter` - The enter key on the keypad.
- `FL_F` - One of the function keys; use `FL_F` + n for function key n.
- `FL_Shift_L` - The lefthand shift key.
- `FL_Shift_R` - The righthand shift key.
- `FL_Control_L` - The lefthand control key.
- `FL_Control_R` - The righthand control key.
- `FL_Caps_Lock` - The caps lock key.
- `FL_Meta_L` - The left meta/Windows key.
- `FL_Meta_R` - The right meta/Windows key.
- `FL_Alt_L` - The left alt key.
- `FL_Alt_R` - The right alt key.
- `FL_Delete` - The delete key.

## 14.6 Fl::event\_state() Values

The following constants define bits in the `Fl::event_state()` value:

- `FL_SHIFT` - One of the shift keys is down.
- `FL_CAPS_LOCK` - The caps lock is on.
- `FL_CTRL` - One of the ctrl keys is down.
- `FL_ALT` - One of the alt keys is down.
- `FL_NUM_LOCK` - The num lock is on.
- `FL_META` - One of the meta/Windows keys is down.
- `FL_COMMAND` - An alias for `FL_CTRL` on WIN32 and X11, or `FL_META` on MacOS X.
- `FL_SCROLL_LOCK` - The scroll lock is on.
- `FL_BUTTON1` - Mouse button 1 is pushed.
- `FL_BUTTON2` - Mouse button 2 is pushed.
- `FL_BUTTON3` - Mouse button 3 is pushed.
- `FL_BUTTONS` - Any mouse button is pushed.
- `FL_BUTTON(n)` - Mouse button N ( $N > 0$ ) is pushed.

## 14.7 Alignment Values

The following constants define bits that can be used with `Fl_Widget::align()` to control the positioning of the label:

- `FL_ALIGN_CENTER` - The label is centered (0).
- `FL_ALIGN_TOP` - The label is top-aligned.
- `FL_ALIGN_BOTTOM` - The label is bottom-aligned.
- `FL_ALIGN_LEFT` - The label is left-aligned.
- `FL_ALIGN_RIGHT` - The label is right-aligned.
- `FL_ALIGN_CLIP` - The label is clipped to the widget.
- `FL_ALIGN_WRAP` - The label text is wrapped as needed.
- `FL_ALIGN_TOP_LEFT`
- `FL_ALIGN_TOP_RIGHT`
- `FL_ALIGN_BOTTOM_LEFT`
- `FL_ALIGN_BOTTOM_RIGHT`
- `FL_ALIGN_LEFT_TOP`

- `FL_ALIGN_RIGHT_TOP`
- `FL_ALIGN_LEFT_BOTTOM`
- `FL_ALIGN_RIGHT_BOTTOM`
- `FL_ALIGN_INSIDE` - 'or' this with other values to put label inside the widget.

## 14.8 Fonts

The following constants define the standard FLTK fonts:

- `FL_HELVETICA` - Helvetica (or Arial) normal (0).
- `FL_HELVETICA_BOLD` - Helvetica (or Arial) bold.
- `FL_HELVETICA_ITALIC` - Helvetica (or Arial) oblique.
- `FL_HELVETICA_BOLD_ITALIC` - Helvetica (or Arial) bold-oblique.
- `FL_COURIER` - Courier normal.
- `FL_COURIER_BOLD` - Courier bold.
- `FL_COURIER_ITALIC` - Courier italic.
- `FL_COURIER_BOLD_ITALIC` - Courier bold-italic.
- `FL_TIMES` - Times roman.
- `FL_TIMES_BOLD` - Times bold.
- `FL_TIMES_ITALIC` - Times italic.
- `FL_TIMES_BOLD_ITALIC` - Times bold-italic.
- `FL_SYMBOL` - Standard symbol font.
- `FL_SCREEN` - Default monospaced screen font.
- `FL_SCREEN_BOLD` - Default monospaced bold screen font.
- `FL_ZAPF_DINGBATS` - Zapf-dingbats font.

## 14.9 Colors

The `Fl_Color` enumeration type holds a FLTK color value. Colors are either 8-bit indexes into a virtual colormap or 24-bit RGB color values. Color indices occupy the lower 8 bits of the value, while RGB colors occupy the upper 24 bits, for a byte organization of RGBI.

### 14.9.1 Color Constants

Constants are defined for the user-defined foreground and background colors, as well as specific colors and the start of the grayscale ramp and color cube in the virtual colormap. Inline functions are provided to retrieve specific grayscale, color cube, or RGB color values.

The following color constants can be used to access the user-defined colors:

- `FL_BACKGROUND_COLOR` - the default background color
- `FL_BACKGROUND2_COLOR` - the default background color for text, list, and valuator widgets
- `FL_FOREGROUND_COLOR` - the default foreground color (0) used for labels and text
- `FL_INACTIVE_COLOR` - the inactive foreground color
- `FL_SELECTION_COLOR` - the default selection/highlight color

The following color constants can be used to access the colors from the FLTK standard color cube:

- `FL_BLACK`
- `FL_BLUE`
- `FL_CYAN`
- `FL_DARK_BLUE`
- `FL_DARK_CYAN`
- `FL_DARK_GREEN`
- `FL_DARK_MAGENTA`
- `FL_DARK_RED`
- `FL_DARK_YELLOW`
- `FL_GREEN`
- `FL_MAGENTA`
- `FL_RED`
- `FL_WHITE`
- `FL_YELLOW`

The inline methods for getting a grayscale, color cube, or RGB color value are described in [Appendix B – Function Reference](#).

## 14.10 Cursors

The following constants define the mouse cursors that are available in FLTK. The double-headed arrows are bitmaps provided by FLTK on X, the others are provided by system-defined cursors.

- `FL_CURSOR_DEFAULT` - the default cursor, usually an arrow (0)
- `FL_CURSOR_ARROW` - an arrow pointer
- `FL_CURSOR_CROSS` - crosshair
- `FL_CURSOR_WAIT` - watch or hourglass
- `FL_CURSOR_INSERT` - I-beam
- `FL_CURSOR_HAND` - hand (uparrow on MSWindows)
- `FL_CURSOR_HELP` - question mark
- `FL_CURSOR_MOVE` - 4-pointed arrow
- `FL_CURSOR_NS` - up/down arrow
- `FL_CURSOR_WE` - left/right arrow
- `FL_CURSOR_NWSE` - diagonal arrow
- `FL_CURSOR_NESW` - diagonal arrow
- `FL_CURSOR_NONE` - invisible

## 14.11 FD "When" Conditions

- `FL_READ` - Call the callback when there is data to be read.
- `FL_WRITE` - Call the callback when data can be written without blocking.
- `FL_EXCEPT` - Call the callback if an exception occurs on the file.

## 14.12 Damage Masks

The following damage mask bits are used by the standard FLTK widgets:

- `FL_DAMAGE_CHILD` - A child needs to be redrawn.
- `FL_DAMAGE_EXPOSE` - The window was exposed.
- `FL_DAMAGE_SCROLL` - The `F1_Scroll` widget was scrolled.
- `FL_DAMAGE_OVERLAY` - The overlay planes need to be redrawn.
- `FL_DAMAGE_USER1` - First user-defined damage bit.
- `FL_DAMAGE_USER2` - Second user-defined damage bit.
- `FL_DAMAGE_ALL` - Everything needs to be redrawn.

## **Chapter 15**

### **D - GLUT Compatibility**

This appendix describes the GLUT compatibility header file supplied with FLTK.

FLTK's GLUT compatibility is based on the original GLUT 3.7 and the follow-on FreeGLUT 2.4.0 libraries.

## 15.1 Using the GLUT Compatibility Header File

You should be able to compile existing GLUT source code by including `<FL/glut.H>` instead of `<GL/glut.h>`. This can be done by editing the source, by changing the `-I` switches to the compiler, or by providing a symbolic link from `GL/glut.h` to `FL/glut.H`.

*All files calling GLUT procedures must be compiled with C++.* You may have to alter them slightly to get them to compile without warnings, and you may have to rename them to get make to use the C++ compiler.

You must link with the FLTK library. Most of `FL/glut.H` is inline functions. You should take a look at it (and maybe at `test/glpuzzle.cxx` in the FLTK source) if you are having trouble porting your GLUT program.

This has been tested with most of the demo programs that come with the GLUT and FreeGLUT distributions.

## 15.2 Known Problems

The following functions and/or arguments to functions are missing, and you will have to replace them or comment them out for your code to compile:

- `glutGet(GLUT_ELAPSED_TIME)`
- `glutGet(GLUT_SCREEN_HEIGHT_MM)`
- `glutGet(GLUT_SCREEN_WIDTH_MM)`
- `glutGet(GLUT_WINDOW_NUM_CHILDREN)`
- `glutInitDisplayMode(GLUT_LUMINANCE)`
- `glutLayerGet(GLUT_HAS_OVERLAY)`
- `glutLayerGet(GLUT_LAYER_IN_USE)`
- `glutPushWindow()`
- `glutSetColor(), glutGetColor(), glutCopyColormap()`
- `glutVideoResize() missing.`
- `glutWarpPointer()`
- `glutWindowStatusFunc()`
- Spaceball, buttonbox, dials, and tablet functions

Most of the symbols/enumerations have different values than GLUT uses. This will break code that relies on the actual values. The only symbols guaranteed to have the same values are true/false pairs like `GLUT_DOWN` and `GLUT_UP`, mouse buttons `GLUT_LEFT_BUTTON`, `GLUT_MIDDLE_BUTTON`, `GLUT_RIGHT_BUTTON`, and `GLUT_KEY_F1` thru `F12`.

The strings passed as menu labels are not copied.

`glutPostRedisplay()` does not work if called from inside a display function. You must use `glutIdleFunc()` if you want your display to update continuously.

`glutSwapBuffers()` does not work from inside a display function. This is on purpose, because FLTK swaps the buffers for you.

`glutUseLayer()` does not work well, and should only be used to initialize transformations inside a resize callback. You should redraw overlays by using `glutOverlayDisplayFunc()`.

Overlays are cleared before the overlay display function is called. `glutLayerGet(GLUT_OVERLAY_DAMAGED)` always returns true for compatibility with some GLUT overlay programs. You must rewrite your code so that `gl_color()` is used to choose colors in an overlay, or you will get random overlay colors.

`glutSetCursor(GLUT_CURSOR_FULL_CROSSHAIR)` just results in a small crosshair.

The fonts used by `glutBitmapCharacter()` and `glutBitmapWidth()` may be different.

`glutInit(argc, argv)` will consume different switches than GLUT does. It accepts the switches recognized by `F1::args()`, and will accept any abbreviation of these switches (such as "-di" for "-display").

## 15.3 Mixing GLUT and FLTK Code

You can make your GLUT window a child of a `F1_Window` with the following scheme. The biggest trick is that GLUT insists on `show()`'ing the window at the point it is created, which means the `F1_Window` parent window must already be shown.

- Don't call `glutInit()`.
- Create your `F1_Window`, and any FLTK widgets. Leave a blank area in the window for your GLUT window.
- `show()` the `F1_Window`. Perhaps call `show(argc, argv)`.
- Call `window->begin()` so that the GLUT window will be automatically added to it.
- Use `glutInitWindowSize()` and `glutInitWindowPosition()` to set the location in the parent window to put the GLUT window.
- Put your GLUT code next. It probably does not need many changes. Call `window->end()` immediately after the `glutCreateWindow()`!
- You can call either `glutMainLoop()`, `F1::run()`, or loop calling `F1::wait()` to run the program.

## 15.4 class `F1_Glut_Window`



## **Chapter 16**

### **E - Forms Compatibility**

This appendix describes the Forms compatibility included with FLTK.

## 16.1 Importing Forms Layout Files

**FLUID** can read the .fd files put out by all versions of Forms and XForms fdesign. However, it will mangle them a bit, but it prints a warning message about anything it does not understand. FLUID cannot write fdesign files, so you should save to a new name so you don't write over the old one.

You will need to edit your main code considerably to get it to link with the output from FLUID. If you are not interested in this you may have more immediate luck with the forms compatibility header, <FL/forms.H>.

## 16.2 Using the Compatibility Header File

You should be able to compile existing Forms or XForms source code by changing the include directory switch to your compiler so that the `forms.h` file supplied with FLTK is included. Take a look at `forms.h` to see how it works, but the basic trick is lots of inline functions. Most of the XForms demo programs work without changes.

You will also have to compile your Forms or XForms program using a C++ compiler. The FLTK library does not provide C bindings or header files.

Although FLTK was designed to be compatible with the GL Forms library (version 0.3 or so), XForms has bloated severely and its interface is X-specific. Therefore, XForms compatibility is no longer a goal of FLTK. Compatibility was limited to things that were free, or that would add code that would not be linked in if the feature is unused, or that was not X-specific.

To use any new features of FLTK, you should rewrite your code to not use the inline functions and instead use "pure" FLTK. This will make it a lot cleaner and make it easier to figure out how to call the FLTK functions. Unfortunately this conversion is harder than expected and even Digital Domain's inhouse code still uses `forms.H` a lot.

## 16.3 Problems You Will Encounter

Many parts of XForms use X-specific structures like `XEvent` in their interface. I did not emulate these! Unfortunately these features (such as the "canvas" widget) are needed by most large programs. You will need to rewrite these to use FLTK subclasses.

`F1_Free` widgets emulate the *old* Forms "free" widget. It may be useful for porting programs that change the `handle()` function on widgets, but you will still need to rewrite things.

`F1_Timer` widgets are provided to emulate the XForms timer. These work, but are quite inefficient and inaccurate compared to using `F1::add_timeout()`.

*All instance variables are hidden.* If you directly refer to the `x`, `y`, `w`, `h`, `label`, or other fields of your Forms widgets you will have to add empty parenthesis after each reference. The easiest way to do this is to globally replace "`→ x`" with "`→ x()`", etc. Replace "boxtyle" with "box()".

`const char *` arguments to most FLTK methods are simply stored, while Forms would `strdup()` the passed string. This is most noticeable with the label of widgets. Your program must always pass static data such as a string constant or malloc'd buffer to `label()`. If you are using labels to display program output you may want to try the `F1_Output` widget.

The default fonts and sizes are matched to the older GL version of Forms, so all labels will draw somewhat larger than an XForms program does.

fdesign outputs a setting of a "fdui" instance variable to the main window. I did not emulate this because I wanted all instance variables to be hidden. You can store the same information in the `user_data()` field of a window. To do this, search through the fdesign output for all occurrences of " → fdui" and edit to use " → user\_data()" instead. This will require casts and is not trivial.

The prototype for the functions passed to `fl_add_timeout()` and `fl_set_idle_callback()` callback are different.

**All the following XForms calls are missing:**

- `FL_REVISION`, `fl_library_version()`
- `FL_RETURN_DBLCHECK` (use [Fl::event\\_clicks\(\)](#))
- `fl_add_signal_callback()`
- `fl_set_form_atactivate()` `fl_set_form_atdeactivate()`
- `fl_set_form_property()`
- `fl_set_app_mainform()`, `fl_get_app_mainform()`
- `fl_set_form_minsize()`, `fl_set_form_maxsize()`
- `fl_set_form_event_cmask()`, `fl_get_form_event_cmask()`
- `fl_set_form_dblbuffer()`, `fl_set_object_dblbuffer()` (use an [Fl\\_Double\\_Window](#) instead)
- `fl_adjust_form_size()`
- `fl_register_raw_callback()`
- `fl_set_object_bw()`, `fl_set_border_width()`
- `fl_set_object_resize()`, `fl_set_object_gravity()`
- `fl_set_object_shortcutkey()`
- `fl_set_object_automatic()`
- `fl_get_object_bbox()` (maybe FLTK should do this)
- `fl_set_object_prehandler()`, `fl_set_object_posthandler()`
- `fl_enumerate_fonts()`
- Most drawing functions
- `fl_set_coordunit()` (FLTK uses pixels all the time)
- `fl_ringbell()`
- `fl_gettime()`
- `fl_win*` () (all these functions)
- `fl_initialize(argc, argv, x, y, z)` ignores last 3 arguments
- `fl_read_bitmapfile()`, `fl_read_pixmapfile()`

- `fl_addto_browser_chars()`
- `FL_MENU_BUTTON` just draws normally
- `fl_set_bitmapbutton_file()`, `fl_set_pixmapbutton_file()`
- `FL_CANVAS` objects
- `FL_DIGITAL_CLOCK` (comes out analog)
- `fl_create_bitmap_cursor()`, `fl_set_cursor_color()`
- `fl_set_dial_angles()`
- `fl_show_oneliner()`
- `fl_set_choice_shortcut(a,b,c)`
- command log
- Only some of file selector is emulated
- `FL_DATE_INPUT`
- `fl_pup*` () (all these functions)
- textbox object (should be easy but I had no sample programs)
- xyplot object

## 16.4 Additional Notes

These notes were written for porting programs written with the older IRISGL version of Forms. Most of these problems are the same ones encountered when going from old Forms to XForms:

### **Does Not Run In Background**

The IRISGL library always forked when you created the first window, unless "foreground()" was called. FLTK acts like "foreground()" is called all the time. If you really want the fork behavior do "if (fork()) exit(0)" right at the start of your program.

### **You Cannot Use IRISGL Windows or fl\_queue**

If a Forms (not XForms) program if you wanted your own window for displaying things you would create a IRISGL window and draw in it, periodically calling Forms to check if the user hit buttons on the panels. If the user did things to the IRISGL window, you would find this out by having the value `FL_EVENT` returned from the call to Forms.

None of this works with FLTK. Nor will it compile, the necessary calls are not in the interface.

You have to make a subclass of `Fl_Gl_Window` and write a `draw()` method and `handle()` method. This may require anywhere from a trivial to a major rewrite.

If you draw into the overlay planes you will have to also write a `draw_overlay()` method and call `redraw_overlay()` on the OpenGL window.

One easy way to hack your program so it works is to make the `draw()` and `handle()` methods on your window set some static variables, storing what event happened. Then in the main loop of your program, call `Fl::wait()` and then check these variables, acting on them as though they are events read from `fl_queue`.

### You Must Use OpenGL to Draw Everything

The file `<FL/gl.h>` defines replacements for a lot of IRISGL calls, translating them to OpenGL. There are much better translators available that you might want to investigate.

### You Cannot Make Forms Subclasses

Programs that call `fl_make_object` or directly setting the handle routine will not compile. You have to rewrite them to use a subclass of `Fl_Widget`. It is important to note that the `handle()` method is not exactly the same as the `handle()` function of Forms. Where a Forms `handle()` returned non-zero, your `handle()` must call `do_callback()`. And your `handle()` must return non-zero if it "understood" the event.

An attempt has been made to emulate the "free" widget. This appears to work quite well. It may be quicker to modify your subclass into a "free" widget, since the "handle" functions match.

If your subclass draws into the overlay you are in trouble and will have to rewrite things a lot.

### You Cannot Use `<device.h>`

If you have written your own "free" widgets you will probably get a lot of errors about "getvaluator". You should substitute:

Forms	FLTK
MOUSE_X	<code>Fl::event_x_root()</code>
MOUSE_Y	<code>Fl::event_y_root()</code>
LEFTSHIFTKEY,RIGHTSHIFTKEY	<code>Fl::event_shift()</code>
CAPSLOCKKEY	<code>Fl::event_capslock()</code>
LEFTCTRLKEY,RIGHTCTRLKEY	<code>Fl::event_ctrl()</code>
LEFTALTKEY,RIGHTALTKEY	<code>Fl::event_alt()</code>
MOUSE1,RIGHTMOUSE	<code>Fl::event_state()</code>
MOUSE2,MIDDLEMOUSE	<code>Fl::event_state()</code>
MOUSE3,LEFTMOUSE	<code>Fl::event_state()</code>

Anything else in `getvaluator` and you are on your own...

### Font Numbers Are Different

The "style" numbers have been changed because I wanted to insert bold-italic versions of the normal fonts. If you use Times, Courier, or Bookman to display any text you will get a different font out of FLTK. If you are really desperate to fix this use the following code:

```
fl_font_name(3, "*courier-medium-r-no*");
fl_font_name(4, "*courier-bold-r-no*");
fl_font_name(5, "*courier-medium-o-no*");
fl_font_name(6, "*times-medium-r-no*");
fl_font_name(7, "*times-bold-r-no*");
fl_font_name(8, "*times-medium-i-no*");
fl_font_name(9, "*bookman-light-r-no*");
fl_font_name(10, "*bookman-demi-r-no*");
fl_font_name(11, "*bookman-light-i-no*");
```

## **Chapter 17**

### **F - Operating System Issues**

This appendix describes the operating system specific interfaces in FLTK.

## 17.1 Accessing the OS Interfaces

All programs that need to access the operating system specific interfaces must include the following header file:

```
#include <FL/x.H>
```

Despite the name, this header file will define the appropriate interface for your environment. The pages that follow describe the functionality that is provided for each operating system.

**WARNING:**

The interfaces provided by this header file may change radically in new FLTK releases. Use them only when an existing generic FLTK interface is not sufficient.

## 17.2 The UNIX (X11) Interface

The UNIX interface provides access to the X Window System state information and data structures.

### 17.2.1 Handling Other X Events

```
void Fl::add_handler(int (*f)(int))
```

Installs a function to parse unrecognized events. If FLTK cannot figure out what to do with an event, it calls each of these functions (most recent first) until one of them returns non-zero. If none of them returns non-zero then the event is ignored.

FLTK calls this for any X events it does not recognize, or X events with a window ID that FLTK does not recognize. You can look at the X event in the `fl_xevent` variable.

The argument is the FLTK event type that was not handled, or zero for unrecognized X events. These handlers are also called for global shortcuts and some other events that the widget they were passed to did not handle, for example `FL_SHORTCUT`.

```
extern XEvent *fl_xevent
```

This variable contains the most recent X event.

```
extern ulong fl_event_time
```

This variable contains the time stamp from the most recent X event that reported it; not all events do. Many X calls like cut and paste need this value.

```
Window fl_xid(const Fl_Window *)
```

Returns the XID for a window, or zero if not shown().

```
Fl_Window *fl_find(ulong xid)
```

Returns the `Fl_Window` that corresponds to the given XID, or NULL if not found. This function uses a cache so it is slightly faster than iterating through the windows yourself.

```
int fl_handle(const XEvent &)
```

This call allows you to supply the X events to FLTK, which may allow FLTK to cooperate with another toolkit or library. The return value is non-zero if FLTK understood the event. If the window does not belong to FLTK and the `add_handler()` functions all return 0, this function will return false.

Besides feeding events your code should call `Fl::flush()` periodically so that FLTK redraws its windows.

This function will call the callback functions. It will not return until they complete. In particular, if a callback pops up a modal window by calling `fl_ask()`, for instance, it will not return until the modal function returns.

### 17.2.2 Drawing using Xlib

The following global variables are set before `Fl_Widget::draw()` is called, or by `Fl_Window::make_current()`:

```
extern Display *fl_display;
extern Window fl_window;
extern GC fl_gc;
extern int fl_screen;
extern XVisualInfo *fl_visual;
extern Colormap fl_colormap;
```

You must use them to produce Xlib calls. Don't attempt to change them. A typical X drawing call is written like this:

```
XDrawSomething(fl_display, fl_window, fl_gc, ...);
```

Other information such as the position or size of the X window can be found by looking at `Fl_Window::current()`, which returns a pointer to the `Fl_Window` being drawn.

`unsigned long fl_xpixel(Fl_Color i)`

`unsigned long fl_xpixel(uchar r, uchar g, uchar b)`

Returns the X pixel number used to draw the given FLTK color index or RGB color. This is the X pixel that `fl_color()` would use.

`int fl_parse_color(const char* p, uchar& r, uchar& g, uchar& b)`

Convert a name into the red, green, and blue values of a color by parsing the X11 color names. On other systems, `fl_parse_color` can only convert names in hexadecimal encoding, for example #ff8083.

`extern XFontStruct *fl_xfont`

Points to the font selected by the most recent `fl_font()`. This is not necessarily the current font of `fl_gc`, which is not set until `fl_draw()` is called. If FLTK was compiled with Xft support, `fl_xfont` will usually be 0 and `fl_xftfont` will contain a pointer to the XftFont structure instead.

`extern void *fl_xftfont`

If FLTK was compiled with Xft support enabled, `fl_xftfont` Points to the xft font selected by the most recent `fl_font()`. Otherwise it will be 0. `fl_xftfont` should be cast to `XftFont*`.

### 17.2.3 Changing the Display, Screen, or X Visual

FLTK uses only a single display, screen, X visual, and X colormap. This greatly simplifies its internal structure and makes it much smaller and faster. You can change which it uses by setting global variables

before the first `Fl_Window::show()` is called. You may also want to call `Fl::visual()`, which is a portable interface to get a full color and/or double buffered visual.

```
int Fl::display(const char *)
```

Set which X display to use. This actually does `putenv ("DISPLAY=...")` so that child programs will display on the same screen if called with `exec()`. This must be done before the display is opened. This call is provided under MacOS and WIN32 but it has no effect.

```
extern Display *fl_display
```

The open X display. This is needed as an argument to most Xlib calls. Don't attempt to change it! This is NULL before the display is opened.

```
void fl_open_display()
```

Opens the display. Does nothing if it is already open. This will make sure `fl_display` is non-zero. You should call this if you wish to do X calls and there is a chance that your code will be called before the first `show()` of a window.

This may call `Fl::abort()` if there is an error opening the display.

```
void fl_close_display()
```

This closes the X connection. You do *not* need to call this to exit, and in fact it is faster to not do so! It may be useful to call this if you want your program to continue without the X connection. You cannot open the display again, and probably cannot call any FLTK functions.

```
extern int fl_screen
```

Which screen number to use. This is set by `fl_open_display()` to the default screen. You can change it by setting this to a different value immediately afterwards. It can also be set by changing the last number in the `Fl::display()` string to "host:0.#".

```
extern XVisualInfo *fl_visual
```

```
extern Colormap fl_colormap
```

The visual and colormap that FLTK will use for all windows. These are set by `fl_open_display()` to the default visual and colormap. You can change them before calling `show()` on the first window. Typical code for changing the default visual is:

```
Fl::args(argc, argv); // do this first so $DISPLAY is set
fl_open_display();
fl_visual = find_a_good_visual(fl_display, fl_screen);
if (!fl_visual) Fl::abort("No good visual");
fl_colormap = make_a_colormap(fl_display, fl_visual->visual, fl_visual->depth);
// it is now ok to show() windows:
window->show(argc, argv);
```

#### 17.2.4 Using a Subclass of `Fl_Window` for Special X Stuff

FLTK can manage an X window on a different screen, visual and/or colormap, you just can't use FLTK's drawing routines to draw into it. But you can write your own `draw()` method that uses Xlib (and/or OpenGL) calls only.

FLTK can also manage XID's provided by other libraries or programs, and call those libraries when the window needs to be redrawn.

To do this, you need to make a subclass of `Fl_Window` and override some of these virtual functions:

```
virtual void Fl_Window::show()
```

If the window is already `shown()` this must cause it to be raised, this can usually be done by calling

`F1_Window::show()`. If not `shown()` your implementation must call either `F1_X::set_xid()` or `F1_X::make_xid()`.

An example:

```
void MyWindow::show() {
    if (shown()) {F1_Window::show(); return;} // you must do this!
    fl_open_display(); // necessary if this is first window
    // we only calculate the necessary visual colormap once:
    static XVisualInfo *visual;
    static Colormap colormap;
    if (!visual) {
        visual = figure_out_visual();
        colormap = XCreateColormap(f1_display, RootWindow(f1_display,f1_screen),
                                   vis->visual, AllocNone);
    }
    F1_X::make_xid(this, visual, colormap);
}
```

`F1_X *F1_Xset_xid(F1_Window *, Window xid)`

Allocate a hidden structure called an `F1_X`, put the XID into it, and set a pointer to it from the `F1_Window`. This causes `F1_Window::shown()` to return true.

`void F1_X::make_xid(F1_Window *, XVisualInfo *= fl_visual, Colormap = fl_colormap)`

This static method does the most onerous parts of creating an X window, including setting the label, resize limitations, etc. It then does `F1_X::set_xid()` with this new window and maps the window.

`virtual void F1_Window::flush()`

This virtual function is called by `F1::flush()` to update the window. For FLTK's own windows it does this by setting the global variables `fl_window` and `fl_gc` and then calling the `draw()` method. For your own windows you might just want to put all the drawing code in here.

The X region that is a combination of all damage () calls done so far is in `F1_X::i(this)->region`. If NULL then you should redraw the entire window. The undocumented function `fl_clip_region(XRegion)` will initialize the FLTK clip stack with a region or NULL for no clipping. You must set region to NULL afterwards as `fl_clip_region()` will own and delete it when done.

If `damage() & FL_DAMAGE_EXPOSE` then only X expose events have happened. This may be useful if you have an undamaged image (such as a backing buffer) around.

Here is a sample where an undamaged image is kept somewhere:

```
void MyWindow::flush() {
    fl_clip_region(F1_X::i(this)->region);
    F1_X::i(this)->region = 0;
    if (damage() != 2) {... draw things into backing store ...}
    ... copy backing store to window ...
}
```

`virtual void F1_Window::hide()`

Destroy the window server copy of the window. Usually you will destroy contexts, pixmaps, or other resources used by the window, and then call `F1_Window::hide()` to get rid of the main window identified by `xid()`. If you override this, you must also override the destructor as shown:

```
void MyWindow::hide() {
    if (mypixmap) {
        XFreePixmap(f1_display,mypixmap);
        my pixmap = 0;
    }
}
```

```
    Fl_Window::hide(); // you must call this
}
```

`virtual void Fl_Window::~Fl_Window()`

Because of the way C++ works, if you override `hide()` you *must* override the destructor as well (otherwise only the base class `hide()` is called):

```
MyWindow::~MyWindow() {
    hide();
}
```

### 17.2.5 Setting the Icon of a Window

FLTK currently supports setting a window's icon **before** it is shown using the `Fl_Window::icon()` method.

`void Fl_Window::icon(char *)`

Sets the icon for the window to the passed pointer. You will need to cast the icon `Pixmap` to a `char *` when calling this method. To set a monochrome icon using a bitmap compiled with your application use:

```
#include "icon.xbm"

fl_open_display(); // needed if display has not been previously opened

Pixmap p = XCreateBitmapFromData(f1_display, DefaultRootWindow(f1_display),
                                 icon_bits, icon_width, icon_height);

window->icon((char *)p);
```

To use a multi-colored icon, the XPM format and library should be used as follows:

```
#include <X11/xpm.h>
#include "icon.xpm"

fl_open_display(); // needed if display has not been previously opened

Pixmap p, mask;

XpmCreatePixmapFromData(f1_display, DefaultRootWindow(f1_display),
                       icon_xpm, &p, &mask, NULL);

window->icon((char *)p);
```

When using the Xpm library, be sure to include it in the list of libraries that are used to link the application (usually "-lXpm").

**NOTE:**

You must call `Fl_Window::show(argc, argv)` for the icon to be used. The `Fl_Window::show()` method does not bind the icon to the window.

### 17.2.6 X Resources

When the `Fl_Window::show(argc, argv)` method is called, FLTK looks for the following X resources:

- `background` - The default background color for widgets (color).
- `dndTextOps` - The default setting for drag and drop text operations (boolean).
- `foreground` - The default foreground (label) color for widgets (color).
- `scheme` - The default scheme to use (string).
- `selectBackground` - The default selection color for menus, etc. (color).
- `Text.background` - The default background color for text fields (color).
- `tooltips` - The default setting for tooltips (boolean).
- `visibleFocus` - The default setting for visible keyboard focus on non-text widgets (boolean).

Resources associated with the first window's `F1_Window::xclass()` string are queried first, or if no class has been specified then the class "fltk" is used (e.g. `fltk.background`). If no match is found, a global search is done (e.g. `*background`).

## 17.3 The Windows (WIN32) Interface

The Windows interface provides access to the WIN32 GDI state information and data structures.

### 17.3.1 Handling Other WIN32 Messages

By default a single WNDCLASSEX called "FLTK" is created. All `F1_Window`'s are of this class unless you use `F1_Window::xclass()`. The window class is created the first time `F1_Window::show()` is called.

You can probably combine FLTK with other libraries that make their own WIN32 window classes. The easiest way is to call `Fl::wait()`, as it will call `DispatchMessage` for all messages to the other windows. If necessary you can let the other library take over as long as it calls `DispatchMessage()`, but you will have to arrange for the function `Fl::flush()` to be called regularly so that widgets are updated, timeouts are handled, and the idle functions are called.

```
extern MSG fl_msg
```

This variable contains the most recent message read by `GetMessage`, which is called by `Fl::wait()`. This may not be the most recent message sent to an FLTK window, because silly WIN32 calls the handle procedures directly for some events (sigh).

```
void Fl::add_handler(int (*f)(int))
```

Installs a function to parse unrecognized messages sent to FLTK windows. If FLTK cannot figure out what to do with a message, it calls each of these functions (most recent first) until one of them returns non-zero. The argument passed to the functions is the FLTK event that was not handled or zero for unknown messages. If all the handlers return zero then FLTK calls `DefWindowProc()`.

```
HWND fl_xid(const Fl_Window *)
```

Returns the window handle for a `Fl_Window`, or zero if not shown () .

```
Fl_Window *fl_find(HWND xid)
```

Returns the `Fl_Window` that corresponds to the given window handle, or `NULL` if not found. This function uses a cache so it is slightly faster than iterating through the windows yourself.

### 17.3.2 Drawing Things Using the WIN32 GDI

When the virtual function `Fl_Widget::draw()` is called, FLTK stores all the silly extra arguments you need to make a proper GDI call in some global variables:

```
extern HINSTANCE fl_display;
extern HWND fl_window;
extern HDC fl_gc;
COLORREF fl_RGB();
HPEN fl_pen();
HBRUSH fl_brush();
```

These global variables are set before `draw()` is called, or by `Fl_Window::make_current()`. You can refer to them when needed to produce GDI calls, but don't attempt to change them. The functions return GDI objects for the current color set by `fl_color()` and are created as needed and cached. A typical GDI drawing call is written like this:

```
DrawSomething(fl_gc, ..., fl_brush());
```

It may also be useful to refer to `Fl_Window::current()` to get the window's size or position.

### 17.3.3 Setting the Icon of a Window

FLTK currently supports setting a window's icon \*before\* it is shown using the `Fl_Window::icon()` method.

```
void Fl_Window::icon(char *)
```

Sets the icon for the window to the passed pointer. You will need to cast the HICON handle to a `char *` when calling this method. To set the icon using an icon resource compiled with your application use:

```
window->icon((char *)LoadIcon(fl_display, MAKEINTRESOURCE(IDI_ICON)));
```

You can also use the `LoadImage()` and related functions to load specific resolutions or create the icon from bitmap data.

**NOTE:**

You must call `Fl_Window::show(argc, argv)` for the icon to be used. The `Fl_Window::show()` method does not bind the icon to the window.

### 17.3.4 How to Not Get a MSDOS Console Window

WIN32 has a really stupid mode switch stored in the executables that controls whether or not to make a console window.

To always get a console window you simply create a console application (the "/SUBSYSTEM:CONSOLE" option for the linker). For a GUI-only application create a WIN32 application (the "/SUBSYSTEM:WINDOWS" option for the linker).

FLTK includes a `WinMain()` function that calls the ANSI standard `main()` entry point for you. *This function creates a console window when you use the debug version of the library.*

WIN32 applications without a console cannot write to `stdout` or `stderr`, even if they are run from a console window. Any output is silently thrown away. Additionally, WIN32 applications are run in the background by the console, although you can use "start /wait program" to run them in the foreground.

### 17.3.5 Known WIN32 Bugs and Problems

The following is a list of known bugs and problems in the WIN32 version of FLTK:

- If a program is deactivated, `Fl::wait()` does not return until it is activated again, even though many events are delivered to the program. This can cause idle background processes to stop unexpectedly. This also happens while the user is dragging or resizing windows or otherwise holding the mouse down. We were forced to remove most of the efficiency FLTK uses for redrawing in order to get windows to update while being moved. This is a design error in WIN32 and probably impossible to get around.
- `Fl_Gl_Window::can_do_overlay()` returns true until the first time it attempts to draw an overlay, and then correctly returns whether or not there is overlay hardware.
- `SetCapture` (used by `Fl::grab()`) doesn't work, and the main window title bar turns gray while menus are popped up.
- Compilation with `gcc 3.4.4` and `-Os` exposes an optimisation bug in gcc. The symptom is that when drawing filled circles only the perimeter is drawn. This can for instance be seen in the symbols demo. Other optimisation options such as `-O2` and `-O3` seem to work OK. More details can be found in STR#1656

## 17.4 The MacOS Interface

FLTK supports MacOS X using the Apple Carbon library. Older versions of MacOS are *not* supported.

### Control, Option, and Command Modifier Keys

FLTK maps the Mac 'control' key to `FL_CTRL`, the 'option' key to `FL_ALT` and the 'Apple' key to `FL_META`. Keyboard events return the key name in `Fl::event_key()` and the keystroke translation in `Fl::event_text()`. For example, typing Option-Y on a Mac keyboard will set `FL_ALT` in `Fl::event_state()`, set `Fl::event_key()` to 'y' and return the Yen symbol in `Fl::event_text()`.

`WindowRef fl_xid(const Fl_Window *)`

Returns the window reference for an `Fl_Window`, or `NULL` if the window has not been shown.

`Fl_Window *fl_find(WindowRef xid)`

Returns the `Fl_Window` that corresponds to the give window handle, or `NULL` if not found. FLTK windows that are children of top-level windows share the `WindowRef` of the top-level window.

### 17.4.1 Apple "Quit" Event

When the user press Cmd-Q or requests a termination of the application, OS X will send a "Quit" Apple Event. FLTK handles this event by sending an `FL_CLOSE` event to all open windows. If all windows close, the application will terminate.

### 17.4.2 Apple "Open" Event

Whenever the user drops a file onto an application icon, OS X generates an Apple Event of the type "Open". You can have FLTK notify you of an Open event by setting the `f1_open_callback`.

```
void f1_open_callback(void (*cb)(const char *))
```

`cb` will be called with a single iUnix-style file name and path. If multiple files were dropped, `f1_open_callback` will be called multiple times.

### 17.4.3 Drawing Things Using QuickDraw

When the virtual function `F1_Widget::draw()` is called, FLTK has prepared the Window and CGraf-Port for drawing. Clipping and offsets are prepared to allow correct subwindow drawing.

### 17.4.4 Drawing Things Using Quartz

If the FLTK library was compiled using the configuration flag `-enable-quartz`, all code inside `F1_Widget::draw()` is expected to call Quartz drawing functions instead of QuickDraw. The Quartz coordinate system is flipped to match FLTK's coordinate system. The origin for all drawing is in the top left corner of the enclosing `F1_Window`.

#### `F1_Double_Window`

OS X double-buffers all windows automatically. On OS X, `F1_Window` and `F1_Double_Window` are handled internally in the same way.

### 17.4.5 Mac File System Specifics

#### Resource Forks

FLTK does not access the resource fork of an application. However, a minimal resource fork must be created for OS X applications

##### **Caution:**

When using UNIX commands to copy or move executables, OS X will NOT copy any resource forks! For copying and moving use CpMac and MvMac respectively. For creating a tar archive, all executables need to be stripped from their Resource Fork before packing, e.g. "DeRez fluid > fluid.r". After unpacking the Resource Fork needs to be reattached, e.g. "Rez fluid.r -o fluid".

It is advisable to use the Finder for moving and copying and Mac archiving tools like Sit for distribution as they will handle the Resource Fork correctly.

#### Mac File Paths

FLTK uses UNIX-style filenames and paths.

### 17.4.6 Known MacOS Bugs and Problems

The following is a list of known bugs and problems in the MacOS version of FLTK:

- Line styles are not well supported. This is due to limitations in the QuickDraw interface.
- Nested subwindows are not supported, i.e. you can have a `Fl_Window` widget inside a `Fl_Window`, but not a `Fl_Window` inside a `Fl_Window` inside a `Fl_Window`.



## **Chapter 18**

### **G - Migrating Code from FLTK 1.0 to 1.1**

This appendix describes the differences between the FLTK 1.0.x and FLTK 1.1.x functions and classes.

## 18.1 Color Values

Color values are now stored in a 32-bit unsigned integer instead of the unsigned character in 1.0.x. This allows for the specification of 24-bit RGB values or 8-bit FLTK color indices.

`FL_BLACK` and `FL_WHITE` now remain black and white, even if the base color of the gray ramp is changed using `Fl::background()`. `FL_DARK3` and `FL_LIGHT3` can be used instead to draw a very dark or a very bright background hue.

Widgets use the new color symbols `FL_FOREGROUND_COLOR`, `FL_BACKGROUND_COLOR`, `FL_BACKGROUND2_COLOR`, `FL_INACTIVE_COLOR`, and `FL_SELECTION_COLOR`. More details can be found in the chapter [Enumerations](#).

## 18.2 Cut and Paste Support

The FLTK clipboard is now broken into two parts - a local selection value and a cut-and-paste value. This allows FLTK to support things like highlighting and replacing text that was previously cut or copied, which makes FLTK applications behave like traditional GUI applications.

## 18.3 File Chooser

The file chooser in FLTK 1.1.x is significantly different than the one supplied with FLTK 1.0.x. Any code that directly references the old `FCB` class or members will need to be ported to the new `Fl_File_Chooser` class.

## 18.4 Function Names

Some function names have changed from FLTK 1.0.x to 1.1.x in order to avoid name space collisions. You can still use the old function names by defining the `FLTK_1_0_COMPAT` symbol on the command-line when you compile (`-DFLTK_1_0_COMPAT`) or in your source, e.g.:

```
#define FLTK_1_0_COMPAT
#include <FL/Fl.h>
#include <FL/Enumerations.h>
#include <FL/filename.h>
```

The following table shows the old and new function names:

Old 1.0.x Name	New 1.1.x Name
contrast()	fl_contrast()
down()	fl_down()
filename_absolute()	fl_filename_absolute()
filename_expand()	fl_filename_expand()
filename_ext()	fl_filename_ext()
filename_isdir()	fl_filename_isdir()
filename_list()	fl_filename_list()
filename_match()	fl_filename_match()
filename_name()	fl_filename_name()
filename_relative()	fl_filename_relative()
filename_setext()	fl_filename_setext()
frame()	fl_frame()
inactive()	fl_inactive()
numericsort()	fl_numericsort()

## 18.5 Image Support

Image support in FLTK has been significantly revamped in 1.1.x. The `F1_Image` class is now a proper base class, with the core image drawing functionality in the `F1_Bitmap`, `F1_Pixmap`, and `F1_RGB_`-`Image` classes.

BMP, GIF, JPEG, PNG, XBM, and XPM image files can now be loaded using the appropriate image classes, and the `F1_Shared_Image` class can be used to cache images in memory.

Image labels are no longer provided as an add-on label type. If you use the old `label()` methods on an image, the widget's `image()` method is called to set the image as the label.

Image labels in menu items must still use the old labeltype mechanism to preserve source compatibility.

## 18.6 Keyboard Navigation

FLTK 1.1.x now supports keyboard navigation and control with all widgets. To restore the old FLTK 1.0.x behavior so that only text widgets get keyboard focus, call the `F1::visible_focus()` method to disable it:

```
F1::visible_focus(0);
```



## **Chapter 19**

### **H - Migrating Code from FLTK 1.1 to 1.3**

This appendix describes the differences between the FLTK 1.1.x and FLTK 1.3.x functions and classes.

If you want to migrate your code from FLTK 1.0 to FLTK 1.3, then you should also consult Appendix [G - Migrating Code from FLTK 1.0 to 1.1](#).

## **Chapter 20**

### **I - Developer Information**

This chapter describes FLTK development and documentation.

**Note:**

documentation with doxygen will be described here.

## Example

**Note:**

In the following code example(s) "\*" will be replaced by "#" as a temporary solution.

```
/** \file
  Fl_Clock, Fl_Clock_Output widgets . */

/***
 \class Fl_Clock_Output
 \brief This widget can be used to display a program-supplied time.

 The time shown on the clock is not updated. To display the current time,
 use Fl_Clock instead.

 \image html clock.gif

 \image html round_clock.gif
 */

/***
 Returns the displayed time.
 Returns the time in seconds since the UNIX epoch (January 1, 1970).
 \see value(ulong)
 */
 ulong value() const {return value_;}

/***
 Set the displayed time.
 Set the time in seconds since the UNIX epoch (January 1, 1970).
 \param[in] v seconds since epoch
 \see value()
 */
 void Fl_Clock_Output::value(ulong v) {
 [...]
 }

/***
 Create an Fl_Clock widget using the given position, size, and label string.
 The default boxtyle is \c FL_NO_BOX.
 \param[in] X, Y, W, H position and size of the widget
 \param[in] L widget label, default is no label
 */
 Fl_Clock::Fl_Clock(int X, int Y, int W, int H, const char #L)
 : Fl_Clock_Output(X, Y, W, H, L) {}

/***
 Create an Fl_Clock widget using the given boxtyle, position, size, and
 label string.
 \param[in] t boxtyle
 \param[in] X, Y, W, H position and size of the widget
 \param[in] L widget label, default is no label
 */
 Fl_Clock::Fl_Clock(uchar t, int X, int Y, int W, int H, const char #L)
```

---

```

: Fl_Clock_Output(X, Y, W, H, L) {
type(t);
box(t==FL_ROUND_CLOCK ? FL_NO_BOX : FL_UP_BOX);
}

```

**Note:**

From Duncan: (will be removed later, just for now as a reminder)

5. I've just added comments for the fl\_color\_chooser() functions, and in order to keep them and the general Function Reference information for them together, I created a new doxygen group, and used \ingroup in the three comment blocks. This creates a new Modules page (which may not be what we want) with links to it from the File Members and [Fl\\_Color\\_Chooser.H](#) pages. It needs a bit more experimentation on my part unless someone already knows how this should be handled. (Maybe we can add it to a functions.dox file that defines a functions group and do that for all of the function documentation?)

**Update:** the trick is not to create duplicate entries in a new group, but to move the function information into the doxygen comments for the class, and use the navigation links provided. Simply using \relatesalso as the first doxygen command in the function's comment puts it in the appropriate place. There is no need to have \defgroup and \ingroup as well, and indeed they don't work. So, to summarize:

```

Gizmo.H
/** \class Gizmo
   A gizmo that does everything
 */
class Gizmo {
    etc
};
extern int popup_gizmo(...);

Gizmo.hxx:
/** \relatesalso Gizmo
   Pops up a gizmo dialog with a Gizmo in it
 */
int popup_gizmo(...);

```

**Example comment:**

You can use HTML comment statements to embed comments in doxygen comment blocks. These comments will not be visible in the generated document.

The following text is a developer comment.

This will be visible again.

```

The following text is a developer comment.
<!-- *** This *** is *** invisible *** -->
This will be visible again.

```

**Different Headlines:**

```

<H1>Headline in big text (H1)</H1>
<H2>Headline in big text (H2)</H2>
<H3>Headline in big text (H3)</H3>
<H4>Headline in big text (H4)</H4>

```

## Headline in big text (H1)

### Headline in big text (H2)

#### Headline in big text (H3)

##### Headline in big text (H4)

## 20.1 Non-ASCII characters

if you came here from below: back to [Creating Links](#)

```
Doxxygen understands many HTML quoting characters like
&quot;, &uuml;, &ccedil;, &Ccedil;, but not all HTML quoting characters.
```

This will appear in the document:

Doxxygen understands many HTML quoting characters like ", ü, ç, Ç, but not all HTML quoting characters.

For further informations about quoting see <http://www.stack.nl/~dimitri/doxygen/htmlcmds.html>

### Example with UTF-8 encoded text

```
<P>Assuming that the following source code was written on MS Windows,
this example will output the correct label on OS X and X11 as well.
Without the conversion call, the label on OS X would read
<tt>Fahrvergn_gen</tt> with a deformed umlaut u ("cedille",
html "&cedil;").
\#code
btn = new Fl_Button(10, 10, 300, 25);
btn->copy_label(fl_latin1_to_local("Fahrvergnügen"));
\endcode

\note If your application uses characters that are not part of both
encodings, or it will be used in areas that commonly use different
code pages, you might consider upgrading to FLTK 2 which supports
UTF-8 encoding.

\todo This is an example todo entry, please ignore !
```

This will appear in the document:

Assuming that the following source code was written on MS Windows, this example will output the correct label on OS X and X11 as well. Without the conversion call, the label on OS X would read Fahrvergn\_gen with a deformed umlaut u ("cedille", html "&cedil;"). #code btn = new Fl\_Button(10, 10, 300, 25); btn->copy\_label(fl\_latin1\_to\_local("Fahrvergnügen")); #endcode

#### Note:

If your application uses characters that are not part of both encodings, or it will be used in areas that commonly use different code pages, you might consider upgrading to FLTK 2 which supports UTF-8 encoding.

#### [Todo](#)

This is an example todo entry, please ignore !

## 20.2 Document Structure

- `\page` creates a named page
- `\section` creates a named section within that page
- `\subsection` creates a named subsection within the current section
- `\subsubsection` creates a named subsubsection within the current subsection

All these statements take a "name" as their first argument, and a title as their second argument. The title can contain spaces.

The page, section, and subsection titles are formatted in blue color and a size like "<H1>", "<H2>", and "<H3>", and "<H4>", respectively.

By **FLTK documentation convention**, a file like this one with a doxygen documentation chapter has the name "<chapter>.dox". The `\page` statement at the top of the page is "`\page <chapter> This is the title`". Sections within a documentation page must be called "`<chapter>_<section>`", where "`<chapter>`" is the name part of the file, and "`<section>`" is a unique section name within the page that can be referenced in links. The same for subsections and subsubsections.

These doxygen page and section commands work only in special documentation chapters, not within normal source or header documentation blocks. However, links **from** normal (e.g. class) documentation **to** documentation sections **do work**.

This page has

```
\page development I - Developer Information
```

at its top.

This section is

```
\section development_structure Document structure
```

The following section is

```
\section development_links Creating Links
```

## 20.3 Creating Links

Links to other documents and external links can be embedded with

- normal HTML links
- HTML links without markup - doxygen creates "http://" links automatically
- links to other doxygen chapters with the `\ref` statements
- links to named sections within the same or other doxygen chapters, if they are defined there with a `\section` statement

see chapter \ref unicode creates a link to the named chapter unicode that has been created with a \subpage statement.

see <a href="drawing.html#character\_encoding">chapter 5</a> creates a link to a named html anchor "character\_encoding" within the same file.

For further informations about quoting see  
<http://www.stack.nl/~dimitri/doxygen/htmlcmds.html>

**Bold link text:** you can see the <b>\e old online documentation</b> of FLTK 1.3 at \b <http://www.fltk.org/doc-1.3/toc.html>

see section \ref development\_non-ascii

appears as:

see chapter 11 - Unicode and utf-8 Support creates a link to the named chapter unicode that has been created with a \subpage statement.

see chapter 5 creates a link to a named html anchor "character\_encoding" within the same file.

For further informations about quoting see <http://www.stack.nl/~dimitri/doxygen/htmlcmds.html>

**Bold link text:** you can see the **old online documentation** of FLTK 1.3 at <http://www.fltk.org/doc-1.3/toc.html>

see section Non-ASCII characters

## 20.4 Changing Old Links

Old HTML links and anchors in text documentation pages should be changed as follows:

```
<H2><A name="event_xxx">Fl::event_*() methods</A></H2>
```

becomes :

```
<A NAME="event_xxx"></A> <!-- For old HTML links only ! -->
\section events_event_xxx Fl::event_*() methods
```

The additional HTML "<A NAME=...>" statement is temporary needed, until all links (references) are modified, then:

```
<H2><A name="event_xxx">Fl::event_*() methods</A></H2>
```

becomes :

```
\section events_event_xxx Fl::event_*() methods
```

The "\section" statement can also be a "\subsection" or "\subsubsection" statement.

The references (in this example from index.dox) are changed as follows:

```
\subpage events

<B>
  <UL>
    <LI><A HREF="events.html#event_xxx">Fl::event_*() methods</A></LI>
    <LI><A HREF="events.html#propagation">Event Propagation</A></LI>
  </UL>
</B>
```

becomes :

```
\subpage events

<b>
    \li \ref events_event_xxx
    \li \ref events_propagation
</b>
```

## 20.5 Paragraph Layout

There is no real need to use HTML <P> and </P> tags within the text to tell doxygen to start or stop a paragraph. In most cases, when doxygen encounters a blank line or some, but not all, \commands in the text it knows that it has reached the start or end of a paragraph. Doxygen also offers the \par command for special paragraph handling. It can be used to provide a paragraph title and also to indent a paragraph. Unfortunately \par won't do what you expect if you want to have doxygen links and sometimes html tags don't work either.

```
\par Normal Paragraph with title
```

This paragraph will have a title, but because there is a blank line between the \par and the text, it will have the normal layout.

```
\par Indented Paragraph with title
```

This paragraph will also have a title, but because there is no blank line between the \par and the text, it will be indented.

```
\par
```

It is also possible to have an indented paragraph without title.  
This is how you indent subsequent paragraphs.

```
\par No link to Fl_Widget::draw()
```

Note that the paragraph title is treated as plain text.  
Doxygen type links will not work.

HTML characters and tags may or may not work.

```
Fl_Widget::draw() links and "html" tags work<br>
```

```
\par
```

Use a single line ending with <br> for complicated paragraph titles.

The above code produces the following paragraphs:

### Normal Paragraph with title

This paragraph will have a title, but because there is a blank line between the \par and the text, it will have the normal layout.

### Indented Paragraph with title

This paragraph will also have a title, but because there is no blank line between the \par and the text, it will be indented.

It is also possible to have an indented paragraph without title. This is how you indent subsequent paragraphs.

### No link to Fl\_Widget::draw()

Note that the paragraph title is treated as plain text. Doxygen type links will not work. HTML characters and tags may or may not work.

[Fl\\_Widget::draw\(\)](#) links and "html" tags work

Use a single line ending with <br> for complicated paragraph titles.

## 20.6 Hack for missing "tiny.gif" file

### [Todo](#)

HACK\* : include image file for footer. Doxygen does not include the file "tiny.gif" from "html\_footer" in its output html dir. Find out, how this can be done, or avoid using an image in the HTML footer.

## 20.7 5 Navigation Proposals

## **Chapter 21**

### **J - Software License**

December 11, 2001

The FLTK library and included programs are provided under the terms of the GNU Library General Public License (LGPL) with the following exceptions:

1. Modifications to the FLTK configure script, config header file, and makefiles by themselves to support a specific platform do not constitute a modified or derivative work.

The authors do request that such modifications be contributed to the FLTK project - send all contributions to "fltk-bugs@fltk.org".

2. Widgets that are subclassed from FLTK widgets do not constitute a derivative work.
3. Static linking of applications and widgets to the FLTK library does not constitute a derivative work and does not require the author to provide source code for the application or widget, use the shared FLTK libraries, or link their applications or widgets against a user-supplied version of FLTK.

If you link the application or widget to a modified version of FLTK, then the changes to FLTK must be provided under the terms of the LGPL in sections 1, 2, and 4.

4. You do not have to provide a copy of the FLTK license with programs that are linked to the FLTK library, nor do you have to identify the FLTK license in your program or documentation as required by section 6 of the LGPL.

However, programs must still identify their use of FLTK. The following example statement can be included in user documentation to satisfy this requirement:

*[program/widget] is based in part on the work of the FLTK project (<http://www.fltk.org>).*

## **Chapter 22**

### **K - Example Source Code**

March 19, 2005

The FLTK distribution contains over 60 sample applications written in, or ported to, FLTK. If the FLTK archive you received does not contain a 'test' directory, you can download the complete FLTK distribution from <http://fltk.org/software.php>.

Most of the example programs were created while testing a group of widgets. They are not meant to be great achievements in clean C++ programming, but merely a test platform to verify the functionality of the FLTK library.

## 22.1 Example Applications

adjuster	arc	ask	bitmap	blocks	boxtyle
browser	button	buttons	checkers	clock	colbrowser
color_chooser	cube	CubeView	cursor	curve	demo
doublebuffer	editor	fast_slow	file_chooser	fluid	fonts
forms	fractals	fullscreen	gl_overlay	glpuzzle	hello
help	iconize	image	inactive	input	input_choice
keyboard	label	line_style	list_visuals	mandelbrot	menubar
message	minimum	navigation	output	overlay	pack
pixmap_- browser	pixmap	preferences	radio	resizebox	resize
scroll	shape	subwindow	sudoku	symbols	tabs
threads	tile	tiled_image	valuators		

### 22.1.1 adjuster

`adjuster` shows a nifty little widget for quickly setting values in a great range.

### 22.1.2 arc

The `arc` demo explains how to derive your own widget to generate some custom drawings. The sample drawings use the matrix based arc drawing for some fun effects.

### 22.1.3 ask

`ask` shows some of FLTK's standard dialog boxes. Click the correct answers or you may end up in a loop, or you may end up in a loop, or you... .

### 22.1.4 bitmap

This simple test shows the use of a single color bitmap as a label for a box widget. Bitmaps are stored in the X11 '.bmp' file format and can be part of the source code.

### 22.1.5 blocks

A wonderful and addictive game that shows the usage of FLTK timers, graphics, and how to implement sound on all platforms. `blocks` is also a good example for the Mac OS X specific bundle format.

### 22.1.6 boxtypes

`boxtypes` gives an overview of readily available boxes and frames in FLTK. More types can be added by the application programmer. When using themes, FLTK shuffles boxtypes around to give your program a new look.

### 22.1.7 browser

`browser` shows the capabilities of the [Fl\\_Browser](#) widget. Important features tested are loading of files, line formatting, and correct positioning of the browser data window.

### 22.1.8 button

The `button` test is a simple demo of push-buttons and callbacks.

### 22.1.9 buttons

`buttons` shows a sample of FLTK button types.

### 22.1.10 checkers

Written by Steve Poulsen in early 1979, `checkers` shows how to convert a VT100 text-terminal based program into a neat application with a graphical UI. Check out the code that drags the pieces, and how the pieces are drawn by layering. Then tell me how to beat the computer at Checkers.

### 22.1.11 clock

The `clock` demo shows two analog clocks. The innards of the [Fl\\_Clock](#) widget are pretty interesting, explaining the use of timeouts and matrix based drawing.

### 22.1.12 colbrowser

`colbrowser` runs only on X11 systems. It reads `/usr/lib/X11/rgb.txt` to show the color representation of every text entry in the file. This is beautiful, but only moderately useful unless your UI is written in *Motif*.

### 22.1.13 color\_chooser

The `color_chooser` gives a short demo of FLTK's palette based color chooser and of the RGB based color wheel.

### 22.1.14 cube

The `cube` demo shows the speed of OpenGL. It also tests the ability to render two OpenGL buffers into a single window, and shows OpenGL text.

### 22.1.15 CubeView

`CubeView` shows how to create a UI containing OpenGL with Fluid.

### 22.1.16 cursor

The `cursor` demo shows all mouse cursor shapes that come standard with FLTK. The *fgcolor* and *bgcolor* sliders work only on few systems (some version of Irix for example).

### 22.1.17 curve

`curve` draws a nice Bezier curve into a custom widget. The *points* option for splines is not supported on all platforms.

### 22.1.18 demo

This tool allows quick access to all programs in the `test` directory. `demo` is based on the visuals of the IrixGL demo program. The menu tree can be changed by editing `test/demo.menu`.

### 22.1.19 doublebuffer

The `doublebuffer` demo show the difference between a single buffered window, which may flicker during a slow redraw, and a double buffered window, which never flickers, but uses twice the amount of RAM. Some modern OS's double buffer all windows automatically to allow transparency and shadows on the desktop. FLTK is smart enough to not tripble buffer a window in that case.

### 22.1.20 editor

FLTK has two very different text input widgets. [Fl\\_Input](#) and derived classes are rather light weight, however [Fl\\_Text\\_Editor](#) is a complete port of *nedit* (with permission). The `editor` test is almost a full application, showing custom syntax highlighting and dialog creation.

### 22.1.21 fast\_slow

`fast_slow` shows how an application can use the [Fl\\_Widget::when\(\)](#) setting to receive different kinds of callbacks.

### 22.1.22 file\_chooser

The standard FLTK `file_chooser` is the result of many iterations, trying to find a middle ground between a complex browser and a fast light implementation.

### 22.1.23 fonts

`fonts` shows all available text fonts on the host system. If your machine still has some pixmap based fonts, the supported sizes will be shown in bold face. Only the first 256 fonts will be listed.

### 22.1.24 forms

`forms` is an XForms program with very few changes. Search for "fltk" to find all changes necessary to port to fltk. This demo shows the different boxtypes. Note that some boxtypes are not appropriate for some objects.

### 22.1.25 fractals

`fractals` shows how to mix OpenGL, Glut and FLTK code. FLTK supports a rather large subset of Glut, so that many Glut applications compile just fine.

### 22.1.26 fullscreen

This demo shows how to do many of the window manipulations that are popular for games. You can toggle the border on/off, switch between single- and double-buffered rendering, and take over the entire screen. More information in the source code.

### 22.1.27 gl\_overlay

`gl_overlay` shows OpenGL overlay plane rendering. If no hardware overlay plane is available, FLTK will simulate it for you.

### 22.1.28 glpuzzle

The `glpuzzle` test shows how most Glut source code compiles easily under FLTK.

### 22.1.29 hello

`hello`: Hello, World. Need I say more? Well, maybe. This tiny demo shows how little is needed to get a functioning application running with FLTK. Quite impressive, I'd say.

### 22.1.30 help

`help` displays the built-in FLTK help browser. The [Fl\\_Help\\_Dialog](#) understands a subset of html and renders various image formats. This widget makes it easy to provide help pages to the user without depending on the operating system's html browser.

### 22.1.31 iconize

`iconize` demonstrates the effect of the window functions `hide()`, `iconize()`, and `show()`.

### 22.1.32 image

The `image` demo shows how an image can be created on the fly. This generated image contains an alpha (transparency) channel which lets previous renderings 'shine through', either via true transparency or by using screen door transparency (pixelation).

### 22.1.33 inactive

`inactive` tests the correct rendering of inactive widgets. To see the inactive version of images, you can check out the pixmap or image test.

### 22.1.34 input

This tool shows and tests different types of text input fields based on [Fl\\_Input](#). The `input` program also tests various settings of [Fl\\_Input::when\(\)](#).

### 22.1.35 input\_choice

`input_choice` tests the latest addition to FLTK1, a text input field with an attached pulldown menu. Windows users will recognize similarities to the 'ComboBox'. `input_choice` starts up in 'plastic' scheme, but the traditional scheme is also supported.

### 22.1.36 keyboard

FLTK unifies keyboard events for all platforms. The `keyboard` test can be used to check the return values of [Fl::event\\_key\(\)](#) and [Fl::event\\_text\(\)](#). It is also great to see the modifier buttons and the scroll wheel at work. Quit this application by closing the window. The ESC key will not work.

### 22.1.37 label

Every FLTK widget can have a label attached to it. The `label` demo shows alignment, clipping and wrapping of text labels. Labels can contain symbols at the start and end of the text, like `@FLTK` or `@circle uh-huh @square`.

### 22.1.38 line\_style

Advanced line drawing can be tested with `line_style`. Not all platforms support all line styles.

### 22.1.39 list\_visuals

This little app finds all available pixel formats for the current X11 screen. But since you are now an FLTK user, you don't have to worry about any of this.

### 22.1.40 mandelbrot

`mandelbrot` shows two advanced topics in one test. It creates grayscale images on the fly, updating them via the *idle* callback system. This is one of the few occasions where the *idle* callback is very useful by giving all available processor time to the application without blocking the UI or other apps.

### 22.1.41 menubar

The `menubar` tests many aspects of FLTK's popup menu system. Among the features are radio buttons, menus taller than the screen, arbitrary sub menu depth, and global shortcuts.

### 22.1.42 message

`message` pops up a few of FLTK's standard message boxes.

### 22.1.43 minimum

The `minimum` test program verifies that the update regions are set correctly. In a real life application, the trail would be avoided by choosing a smaller label or by setting label clipping differently.

### 22.1.44 navigation

`navigation` demonstrates how the text cursor moves from text field to text field when using the arrow keys, tab, and shift-tab.

### 22.1.45 output

`output` shows the difference between the single line and multi line mode of the [Fl\\_Output](#) widget. Fonts can be selected from the FLTK standard list of fonts.

### 22.1.46 overlay

The `overlay` test app show how easy an FLTK window can be layered to display cursor and manipulator style elements. This example derives a new class from [Fl\\_Overlay\\_Window](#) and provides a new function to draw custom overlays.

### 22.1.47 pack

The `pack` test program demonstrates the resizing and repositioning of children of the [Fl\\_Pack](#) group. Putting an [Fl\\_Pack](#) into an [Fl\\_Scroll](#) is a useful way to create a browser for large sets of data.

### 22.1.48 pixmap\_browser

`pixmap_browser` tests the shared-image interface. When using the same image multiple times, [Fl\\_Shared\\_Image](#) will keep it only once in memory.

### 22.1.49 pixmap

This simple test shows the use of a LUT based pixmap as a label for a box widget. Pixmaps are stored in the X11 '.xpm' file format and can be part of the source code. Pixmaps support one transparent color.

### 22.1.50 preferences

I do have my `preferences` in the morning, but sometimes I just can't remember a thing. This is where the [Fl\\_Preferences](#) come in handy. They remember any kind of data between program launches.

### 22.1.51 radio

The `radio` tool was created entirely with *fluid*. It shows some of the available button types and tests radio button behavior.

### 22.1.52 resizebox

`resizebox` shows some possible ways of FLTK's automatic resize behavior..

### 22.1.53 resize

The `resize` demo tests size and position functions with the given window manager.

### 22.1.54 scroll

`scroll` shows how to scroll an area of widgets, one of them being a slow custom drawing. [Fl\\_Scroll](#) uses clipping and smart window area copying to improve redraw speed. The buttons at the bottom of the window control decoration rendering and updates.

### 22.1.55 shape

`shape` is a very minimal demo that shows how to create your own OpenGL rendering widget. Now that you know that, go ahead and write that flight simulator you always dreamt of.

### 22.1.56 subwindow

The `subwindow` demo tests messaging and drawing between the main window and 'true' sub windows. A sub window is different to a group by resetting the FLTK coordinate system to 0, 0 in the top left corner. On Win32 and X11, subwindows have their own operating system specific handle.

### 22.1.57 sudoku

Another highly addictive game - don't play it, I warned you. The implementation shows how to create application icons, how to deal with OS specifics, and how to generate sound.

### 22.1.58 symbols

`symbols` are a speciality of FLTK. These little vector drawings can be integrated into labels. They scale and rotate, and with a little patience, you can define your own. The rotation number refers to 45 degree rotations if you were looking at a numeric keypad (2 is down, 6 is right, etc.).

### 22.1.59 tabs

The `tabs` tool was created with *fluid*. It tests correct hiding and redisplaying of tabs, navigation across tabs, resize behavior, and no unneeded redrawing of invisible widgets.

The `tabs` application shows the [Fl\\_Tabs](#) widget on the left and the [Fl\\_Wizard](#) widget on the right side for direct comparison of these two panel management widgets.

### 22.1.60 threads

FLTK can be used in a multithreading environment. There are some limitations, mostly due to the underlying operating system. `threads` shows how to use [Fl::lock\(\)](#), [Fl::unlock\(\)](#), and [Fl::awake\(\)](#) in secondary threads to keep FLTK happy. Although locking works on all platforms, this demo is not available on every machine.

### 22.1.61 tile

The `tile` tool shows a nice way of using [Fl\\_Tile](#). To test correct resizing of subwindows, the widget for region 1 is created from an [Fl\\_Window](#) class.

### 22.1.62 tiled\_image

The `tiled_image` demo uses an image as the background for a window by repeating it over the full size of the widget. The window is resizable and shows how the image gets repeated.

### 22.1.63 valuators

`valuators` shows all of FLTK's nifty widgets to change numeric values.

### 22.1.64 fluid

`fluid` is not only a big test program, but also a very useful visual UI designer. Many parts of `fluid` were created using `fluid`. See the [Fluid Tutorial](#) for more details.



## **Chapter 23**

### **Todo List**

**Member `Fl_Browser_::draw(int, int, int, int)`** Find the implementation, if any, and document it there!

**Class `Fl_Button`** Refactor the doxygen comments for `Fl_Button` type() documentation.

**Class `Fl_Button`** Refactor the doxygen comments for `Fl_Button` when() documentation.

**Class `Fl_Chart`** Refactor `Fl_Chart::type()` information.

**Class `Fl_Check_Button`** Refactor `Fl_Check_Button` doxygen comments (add color() info etc?)

**Class `Fl_Check_Button`** Generate Fl\_Check\_Button.gif with visible checkmark.

**Class `Fl_Choice`** Refactor the doxygen comments for `Fl_Choice` changed() documentation.

**Member `Fl_Clock::update()`** Find `Fl_Clock::update()` implementation, if any, and document it.

**Class `Fl_Counter`** Refactor the doxygen comments for `Fl_Counter` type() documentation.

**Member `Fl_File_Input::errorcolor() const`** Better docs for `Fl_File_Input::errorcolor()` - is it even used?

**Member `Fl_Group::sizes()`** should the internal representation of the sizes() array be documented?

**Class `Fl_Label`** For FLTK1.3, the `Fl_Label` type will become a widget by itself. That way we will be avoiding a lot of code duplication by handling labels in a similar fashion to widgets containing text. We also provide an easy interface for very complex labels, containing html or vector graphics.

**Member `Fl_Preferences::get(const char *entry, void *value, const void *defaultValue, int defaultSize, int maxSize)`** maxSize should receive the number of bytes that were read.

**Member `Fl_Text_Display::shortcut(int s)`** FIXME : get set methods pointing on shortcut\_ have no effects as shortcut\_ is unused in this class and derived!

**Member `Fl_Text_Display::shortcut() const`** FIXME : get set methods pointing on shortcut\_ have no effects as shortcut\_ is unused in this class and derived!

**Class `Fl_Text_Selection`** members must be documented

**Member `Fl_Widget::align()` const** This function should not take uchar as an argument. Apart from the fact that uchar is too short with only 8 bits, it does not provide type safety (in which case we don't need to declare `Fl_Type` an enum to begin with).

**Member `Fl_Widget::argument(long v)`** The user data value must be implemented using a *union* to avoid 64 bit machine incompatibilities.

**Member `Fl_Color`** enum `Fl_Color` needs some more comments for values, see `Fl/Enumerations.H`

**Member `Fl_When`** doxygen comments for values are incomplete and maybe wrong or unclear

**Member `Fl_Labeltype`** The doxygen comments are incomplete, and some labeltypes are starting with an underscore. Also, there are three external functions undocumented (yet):

- `fl_define_FL_SHADOW_LABEL()`
- `fl_define_FL_ENGRAVED_LABEL()`
- `fl_define_FL_EMBOSSSED_LABEL()`

**Member `Fl_String`** FIXME: temporary (?) typedef to mark UTF8 and Unicode conversions

**Member `Fl::watch_widget_pointer(Fl_Widget *&w)`** explain the role of the watch list, it may be related to invalid widget deletion crash fixes...

**Page 5 - Drawing Things in FLTK** drawing.dox: I fixed the above encoding problem of these &cacute; and umlaut characters, but this text is obsoleted by FLTK 1.3 with utf-8 encoding, or must be rewritten accordingly: How to use native (e.g. Windows "ANSI", or ISO-8859-x) encoding in embedded strings for labels, error messages and more. Please check this (utf-8) encoding on different OS'es and with different language and font environments.

**Page I - Developer Information** This is an example todo entry, please ignore !

**Page I - Developer Information** HACK\* : include image file for footer. Doxygen does not include the file "tiny.gif" from "html\_footer" in its output html dir. Find out, how this can be done, or avoid using an image in the HTML footer.



## **Chapter 24**

### **Deprecated List**

**Member `Fl_Group::focus(Fl_Widget *W)`** This is for backwards compatibility only. You should use `W->take_focus()` instead.

**Member `Fl_Menu_Item::check()`** .

**Member `Fl_Menu_Item::checked() const`** .

**Member `Fl_Menu_Item::uncheck()`** .

**Member `Fl_Spinner::maximum() const`**

**Member `Fl_Spinner::mininum() const`**

# Chapter 25

## Module Index

### 25.1 Modules

Here is a list of all modules:

Windows handling functions . . . . .	201
Events handling functions . . . . .	204
Selection & Clipboard functions . . . . .	216
Screen functions . . . . .	219
Color & Font functions . . . . .	222
Multithreading support functions . . . . .	225
Safe widget deletion support functions . . . . .	227
Cairo support functions and classes . . . . .	229
Common Dialogs classes and functions . . . . .	231



# Chapter 26

## Class Index

### 26.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Fl . . . . .	239
Fl_Cairo_State . . . . .	299
FL_CHART_ENTRY . . . . .	308
Fl_End . . . . .	342
Fl_File_Chooser . . . . .	346
Fl_File_Icon . . . . .	357
Fl_Font_Descriptor . . . . .	369
Fl_Glut_Bitmap_Font . . . . .	386
Fl_Help_Dialog . . . . .	402
Fl_Help_Link . . . . .	406
Fl_Help_Target . . . . .	407
Fl_Image . . . . .	415
Fl_Bitmap . . . . .	265
Fl_XBM_Image . . . . .	705
Fl_Pixmap . . . . .	488
Fl_GIF_Image . . . . .	377
Fl_XPM_Image . . . . .	706
Fl_RGB_Image . . . . .	523
Fl_BMP_Image . . . . .	269
Fl_JPEG_Image . . . . .	441
Fl_PNG_Image . . . . .	492
Fl_PNM_Image . . . . .	493
Fl_Shared_Image . . . . .	544
Fl_Tiled_Image . . . . .	622
Fl_Label . . . . .	442
Fl_Menu_Item . . . . .	462
Fl_Preferences . . . . .	498
Fl_Preferences::Entry . . . . .	512
Fl_Preferences::Name . . . . .	513
Fl_Text_Buffer . . . . .	566
Fl_Text_Display::Style_Table_Entry . . . . .	607
Fl_Text_Editor::Key_Binding . . . . .	616
Fl_Text_Selection . . . . .	617

Fl_Tooltip . . . . .	629
Fl_Widget . . . . .	653
Fl_Box . . . . .	270
Fl_Button . . . . .	294
Fl_Light_Button . . . . .	444
Fl_Check_Button . . . . .	313
Fl_Round_Button . . . . .	530
Fl_Repeat_Button . . . . .	518
Fl_Return_Button . . . . .	520
Fl_Toggle_Button . . . . .	628
Fl_Chart . . . . .	302
Fl_Clock_Output . . . . .	323
Fl_Clock . . . . .	320
Fl_Round_Clock . . . . .	532
Fl_FormsBitmap . . . . .	370
Fl_FormsPixmap . . . . .	372
Fl_Free . . . . .	374
Fl_Group . . . . .	391
Fl_Browser . . . . .	284
Fl_Browser . . . . .	272
Fl_File_Browser . . . . .	343
Fl_Hold_Browser . . . . .	414
Fl_Multi_Browser . . . . .	478
Fl_Select_Browser . . . . .	543
Fl_Check_Browser . . . . .	309
Fl_Color_Chooser . . . . .	327
Fl_Help_View . . . . .	408
Fl_Input_Choice . . . . .	435
Fl_Pack . . . . .	486
Fl_Scroll . . . . .	533
Fl_Spinner . . . . .	556
Fl_Tabs . . . . .	562
Fl_Text_Display . . . . .	587
Fl_Text_Editor . . . . .	608
Fl_Tile . . . . .	619
Fl_Window . . . . .	691
Fl_Double_Window . . . . .	339
Fl_Cairo_Window . . . . .	300
Fl_Overlay_Window . . . . .	483
Fl_Gl_Window . . . . .	378
Fl_Glut_Window . . . . .	387
Fl_Single_Window . . . . .	550
Fl_Menu_Window . . . . .	475
Fl_Wizard . . . . .	703
Fl_Input_ . . . . .	425
Fl_Input . . . . .	421
Fl_File_Input . . . . .	363
Fl_Float_Input . . . . .	368
Fl_Int_Input . . . . .	440
Fl_Multiline_Input . . . . .	479
Fl_Output . . . . .	481
Fl_Multiline_Output . . . . .	480

Fl_Secret_Input . . . . .	542
Fl_Menu_ . . . . .	447
Fl_Choice . . . . .	315
Fl_Menu_Bar . . . . .	456
Fl_Menu_Button . . . . .	459
Fl_Positioner . . . . .	494
Fl_Progress . . . . .	515
Fl_Timer . . . . .	625
Fl_Valuator . . . . .	633
Fl_Adjuster . . . . .	262
Fl_Counter . . . . .	332
Fl_Simple_Counter . . . . .	549
Fl_Dial . . . . .	336
Fl_Fill_Dial . . . . .	366
Fl_Roller . . . . .	527
Fl_Slider . . . . .	552
Fl_Fill_Slider . . . . .	367
Fl_Scrollbar . . . . .	538
Fl_Value_Slider . . . . .	649
Fl_Value_Input . . . . .	639
Fl_Value_Output . . . . .	645



# Chapter 27

## Class Index

### 27.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Fl</a> (The <a href="#">Fl</a> is the FLTK global (static) containing state information and global methods for the current application ) . . . . .	239
<a href="#">Fl_Adjuster</a> (Was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range ) . . . . .	262
<a href="#">Fl_Bitmap</a> (Supports caching and drawing of mono-color (bitmap) images ) . . . . .	265
<a href="#">Fl_BMP_Image</a> (Supports loading, caching, and drawing of Windows Bitmap (BMP) image files )	269
<a href="#">Fl_Box</a> (This widget simply draws its box, and possibly it's label ) . . . . .	270
<a href="#">Fl_Browser</a> (Displays a scrolling list of text lines, and manages all the storage for the text ) . . . . .	272
<a href="#">Fl_Browser_</a> (This is the base for browsers ) . . . . .	284
<a href="#">Fl_Button</a> (Buttons generate callbacks when they are clicked by the user ) . . . . .	294
<a href="#">Fl_Cairo_State</a> (Contains all the necessary info on the current cairo context ) . . . . .	299
<a href="#">Fl_Cairo_Window</a> (This defines a pre-configured cairo fltk window ) . . . . .	300
<a href="#">Fl_Chart</a> ( <a href="#">Fl_Chart</a> displays simple charts ) . . . . .	302
<a href="#">FL_CHART_ENTRY</a> (For internal use only ) . . . . .	308
<a href="#">Fl_Check_Browser</a> (Displays a scrolling list of text lines that may be selected and/or checked by the user ) . . . . .	309
<a href="#">Fl_Check_Button</a> (A button with an "checkmark" to show its status ) . . . . .	313
<a href="#">Fl_Choice</a> (A button that is used to pop up a menu ) . . . . .	315
<a href="#">Fl_Clock</a> (This widget provides a round analog clock display ) . . . . .	320
<a href="#">Fl_Clock_Output</a> (This widget can be used to display a program-supplied time ) . . . . .	323
<a href="#">Fl_Color_Chooser</a> (Standard RGB color chooser ) . . . . .	327
<a href="#">Fl_Counter</a> (Controls a single floating point value with button (or keyboard) arrows ) . . . . .	332
<a href="#">Fl_Dial</a> (Circular dial to control a single floating point value ) . . . . .	336
<a href="#">Fl_Double_Window</a> (The <a href="#">Fl_Double_Window</a> provides a double-buffered window ) . . . . .	339
<a href="#">Fl_End</a> (This is a dummy class that allows you to end a <a href="#">Fl_Group</a> in a constructor list of a class: )	342
<a href="#">Fl_File_Browser</a> (Displays a list of filenames, optionally with file-specific icons ) . . . . .	343
<a href="#">Fl_File_Chooser</a> (Displays a standard file selection dialog that supports various selection modes )	346
<a href="#">Fl_File_Icon</a> (Manages icon images that can be used as labels in other widgets and as icons in the FileBrowser widget ) . . . . .	357
<a href="#">Fl_File_Input</a> (This widget displays a pathname in a text input field ) . . . . .	363
<a href="#">Fl_Fill_Dial</a> (Draws a dial with a filled arc ) . . . . .	366
<a href="#">Fl_Fill_Slider</a> (Widget that draws a filled horizontal slider, useful as a progress or value meter ) .	367

<a href="#">Fl_Float_Input</a> (Subclass of <a href="#">Fl_Input</a> that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits) ) . . . . .	368
<a href="#">Fl_Font_Descriptor</a> (This a structure for an actual system font, with junk to help choose it and info on character sizes ) . . . . .	369
<a href="#">Fl_FormsBitmap</a> (Forms compatibility Bitmap Image Widget ) . . . . .	370
<a href="#">Fl_FormsPixmap</a> (Forms pixmap drawing routines ) . . . . .	372
<a href="#">Fl_Free</a> (Emulation of the Forms "free" widget ) . . . . .	374
<a href="#">Fl_GIF_Image</a> (Supports loading, caching, and drawing of Compuserve GIF <sup>SM</sup> images ) . . . . .	377
<a href="#">Fl_GL_Window</a> (Sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws )	378
<a href="#">Fl_Glut_Bitmap_Font</a> (Fltk glut font/size attributes used in the glutXXX functions ) . . . . .	386
<a href="#">Fl_Glut_Window</a> (GLUT is emulated using this window class and these static variables (plus several more static variables hidden in glut_compatibility.cxx): ) . . . . .	387
<a href="#">Fl_Group</a> (FLTK container widget ) . . . . .	391
<a href="#">Fl_Help_Dialog</a> (Displays a standard help dialog window using the <a href="#">Fl_Help_View</a> widget ) . . . . .	402
<a href="#">Fl_Help_Link</a> (Definition of a link for the html viewer ) . . . . .	406
<a href="#">Fl_Help_Target</a> ( <a href="#">Fl_Help_Target</a> structure ) . . . . .	407
<a href="#">Fl_Help_View</a> (Displays HTML text ) . . . . .	408
<a href="#">Fl_Hold_Browser</a> (The <a href="#">Fl_Hold_Browser</a> is a subclass of <a href="#">Fl_Browser</a> which lets the user select a single item, or no items by clicking on the empty space ) . . . . .	414
<a href="#">Fl_Image</a> ( <a href="#">Fl_Image</a> is the base class used for caching and drawing all kinds of images in FLTK )	415
<a href="#">Fl_Input</a> (This is the FLTK text input widget ) . . . . .	421
<a href="#">Fl_Input_</a> (This is a virtual base class below <a href="#">Fl_Input</a> ) . . . . .	425
<a href="#">Fl_Input_Choice</a> (A combination of the input widget and a menu button ) . . . . .	435
<a href="#">Fl_Int_Input</a> (Subclass of <a href="#">Fl_Input</a> that only allows the user to type decimal digits (or hex num- bers of the form 0xaef) ) . . . . .	440
<a href="#">Fl_JPEG_Image</a> (Supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images ) . . . . .	441
<a href="#">Fl_Label</a> (This struct stores all information for a text or mixed graphics label ) . . . . .	442
<a href="#">Fl_Light_Button</a> . . . . .	444
<a href="#">Fl_Menu_</a> (Base class of all widgets that have a menu in FLTK ) . . . . .	447
<a href="#">Fl_Menu_Bar</a> (This widget provides a standard menubar interface ) . . . . .	456
<a href="#">Fl_Menu_Button</a> (This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of <a href="#">Fl_Menu_Item</a> objects ) . . . . .	459
<a href="#">Fl_Menu_Item</a> (The <a href="#">Fl_Menu_Item</a> structure defines a single menu item that is used by the <a href="#">Fl_- Menu_class</a> ) . . . . .	462
<a href="#">Fl_Menu_Window</a> (Window type used for menus ) . . . . .	475
<a href="#">Fl_Multi_Browser</a> (Subclass of <a href="#">Fl_Browser</a> which lets the user select any set of the lines ) . . . . .	478
' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys )	479
<a href="#">Fl_Multiline_Output</a> (This widget is a subclass of <a href="#">Fl_Output</a> that displays multiple lines of text )	480
<a href="#">Fl_Output</a> (This widget displays a piece of text ) . . . . .	481
<a href="#">Fl_Overlay_Window</a> (This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image ) . . . . .	483
<a href="#">Fl_Pack</a> (This widget was designed to add the functionality of compressing and aligning widgets )	486
<a href="#">Fl_Pixmap</a> (Supports caching and drawing of colormap (pixmap) images, including transparency )	488
<a href="#">Fl_PNG_Image</a> (Supports loading, caching, and drawing of Portable Network Graphics (PNG) image files ) . . . . .	492
<a href="#">Fl_PNM_Image</a> (Supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files ) . . . . .	493
<a href="#">Fl_Positioner</a> (This class is provided for Forms compatibility ) . . . . .	494
<a href="#">Fl_Preferences</a> ( <a href="#">Fl_Preferences</a> provides methods to store user settings between application starts )	498
<a href="#">Fl_Preferences::Entry</a> (An entry associates a preference name to its corresponding value ) . . . . .	512

<b>Fl_Preferences::Name</b> ('Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly ) . . . . .	513
<b>Fl_Progress</b> (Displays a progress bar for the user ) . . . . .	515
<b>Fl_Repeat_Button</b> (The <b>Fl_Repeat_Button</b> is a subclass of <b>Fl_Button</b> that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down ) . . . . .	518
<b>Fl_Return_Button</b> (The <b>Fl_Return_Button</b> is a subclass of <b>Fl_Button</b> that generates a callback when it is pressed or when the user presses the Enter key ) . . . . .	520
<b>Fl_RGB_Image</b> (Supports caching and drawing of full-color images with 1 to 4 channels of color information ) . . . . .	523
<b>Fl_Roller</b> ("dolly" control commonly used to move 3D objects ) . . . . .	527
<b>Fl_Round_Button</b> (Buttons generate callbacks when they are clicked by the user ) . . . . .	530
<b>Fl_Round_Clock</b> (A clock widget of type FL_ROUND_CLOCK ) . . . . .	532
<b>Fl_Scroll</b> (This container widget lets you maneuver around a set of widgets much larger than your window ) . . . . .	533
<b>Fl_Scrollbar</b> (Displays a slider with arrow buttons at the ends of the scrollbar ) . . . . .	538
<b>Fl_Secret_Input</b> (Subclass of <b>Fl_Input</b> that displays its input as a string of asterisks ) . . . . .	542
<b>Fl_Select_Browser</b> (The class is a subclass of <b>Fl_Browser</b> which lets the user select a single item, or no items by clicking on the empty space ) . . . . .	543
<b>Fl_Shared_Image</b> (This class supports caching, loading, and drawing of image files ) . . . . .	544
<b>Fl_Simple_Counter</b> (This widget creates a counter with only 2 arrow buttons ) . . . . .	549
<b>Fl_Single_Window</b> (This is the same as <b>Fl_Window</b> ) . . . . .	550
<b>Fl_Slider</b> (Sliding knob inside a box ) . . . . .	552
<b>Fl_Spinner</b> (This widget is a combination of the input widget and repeat buttons ) . . . . .	556
<b>Fl_Tabs</b> ("file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits ) . . . . .	562
<b>Fl_Text_Buffer</b> (Used by the <b>Fl_Text_Display</b> and <b>Fl_Text_Editor</b> to manage complex text data and is based upon the excellent NEdit text editor engine - see <a href="http://www.nedit.org/">http://www.nedit.org/</a> ) . . . . .	566
<b>Fl_Text_Display</b> (This is the FLTK text display widget ) . . . . .	587
<b>Fl_Text_Display::Style_Table_Entry</b> (This structure associates the color,font,size of a string to draw with an attribute mask matching attr ) . . . . .	607
<b>Fl_Text_Editor</b> (This is the FLTK text editor widget ) . . . . .	608
<b>Fl_Text_Editor::Key_Binding</b> (Simple linked list associating a key/state to a function ) . . . . .	616
<b>Fl_Text_Selection</b> (This is an internal class for <b>Fl_Text_Buffer</b> to manage text selections ) . . . . .	617
<b>Fl_Tile</b> (Lets you resize the children by dragging the border between them: ) . . . . .	619
<b>Fl_Tiled_Image</b> (This class supports tiling of images over a specified area ) . . . . .	622
<b>Fl_Timer</b> (This is provided only to emulate the Forms Timer widget ) . . . . .	625
<b>Fl_Toggle_Button</b> (The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off ) . . . . .	628
<b>Fl_Tooltip</b> (Tooltip support for all FLTK widgets ) . . . . .	629
<b>Fl_Valuator</b> (Controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object ) . . . . .	633
<b>Fl_Value_Input</b> (Displays a numeric value ) . . . . .	639
<b>Fl_Value_Output</b> (Displays a floating point value ) . . . . .	645
<b>Fl_Value_Slider</b> ( <b>Fl_Slider</b> widget with a box displaying the current value ) . . . . .	649
<b>Fl_Widget</b> ( <b>Fl_Widget</b> is the base class for all widgets in FLTK ) . . . . .	653
<b>Fl_Window</b> (This widget produces an actual window ) . . . . .	691
<b>Fl_Wizard</b> (This widget is based off the <b>Fl_Tabs</b> widget, but instead of displaying tabs it only changes "tabs" under program control ) . . . . .	703
<b>Fl_XBM_Image</b> (Supports loading, caching, and drawing of X Bitmap (XBM) bitmap files ) . . . . .	705
<b>Fl_XPM_Image</b> (Supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency ) . . . . .	706



# Chapter 28

## File Index

### 28.1 File List

Here is a list of all documented files with brief descriptions:

<b>aimm.h</b> . . . . .	??
<b>armscii_8.h</b> . . . . .	??
<b>ascii.h</b> . . . . .	??
<b>big5.h</b> . . . . .	??
<b>big5_emacs.h</b> . . . . .	??
<b>case.h</b> . . . . .	??
<b>cgdebug.h</b> . . . . .	??
<b>cp1133.h</b> . . . . .	??
<b>cp1251.h</b> . . . . .	??
<b>cp1255.h</b> . . . . .	??
<b>cp1256.h</b> . . . . .	??
<b>dingbats_.h</b> . . . . .	??
<b>dirent.h</b> . . . . .	??
<b>Enumerations.H</b> (This file contains type definitions and general enumerations ) . . . . .	707
<b>fastarrow.h</b> . . . . .	??
<b>filename.H</b> . . . . .	??
<b>Fl.H</b> ( <i>Fl</i> static class ) . . . . .	721
<b>Fl_Adjuster.H</b> ( <i>Fl_Adjuster</i> widget ) . . . . .	722
<b>fl_arc.cxx</b> (Utility functions for drawing arcs and circles ) . . . . .	723
<b>fl_arci.cxx</b> (Utility functions for drawing circles using integers ) . . . . .	724
<b>fl_ask.H</b> . . . . .	??
<b>Fl_Bitmap.H</b> ( <i>Fl_Bitmap</i> widget ) . . . . .	726
<b>Fl_BMP_Image.H</b> ( <i>Fl_BMP_Image</i> widget ) . . . . .	727
<b>Fl_Box.H</b> ( <i>Fl_Box</i> widget ) . . . . .	728
<b>fl_boxtype.cxx</b> (Drawing code for common box types ) . . . . .	729
<b>Fl_Browser.H</b> ( <i>Fl_Browser</i> widget ) . . . . .	732
<b>Fl_Browser_.H</b> ( <i>Fl_Browser_</i> widget ) . . . . .	733
<b>Fl_Button.H</b> ( <i>Fl_Button</i> widget ) . . . . .	734
<b>Fl_Cairo.H</b> (Handling transparently platform dependent cairo include files ) . . . . .	735
<b>Fl_Cairo_Window.H</b> ( <i>Fl_Cairo_Window</i> Handling transparently a fltk window incorporte a cairo draw callback ) . . . . .	736
<b>Fl_Chart.H</b> ( <i>Fl_Chart</i> widget ) . . . . .	737
<b>Fl_Check_Browser.H</b> ( <i>Fl_Check_Browser</i> widget ) . . . . .	739

<a href="#">Fl_Check_Button.H</a> ( <a href="#">Fl_Check_Button</a> widget) . . . . .	740
<a href="#">Fl_Choice.H</a> ( <a href="#">Fl_Choice</a> widget) . . . . .	741
<a href="#">Fl_Clock.H</a> ( <a href="#">Fl_Clock</a> , <a href="#">Fl_Clock_Output</a> widgets) . . . . .	742
<a href="#">fl_cmap.h</a> . . . . .	??
<a href="#">fl_color.cxx</a> (Color handling) . . . . .	743
<a href="#">Fl_Color_Chooser.H</a> ( <a href="#">Fl_Color_Chooser</a> widget) . . . . .	745
<a href="#">Fl_Counter.H</a> ( <a href="#">Fl_Counter</a> widget) . . . . .	746
<a href="#">fl_curve.cxx</a> (Utility for drawing Bezier curves, adding the points to the current fl_begin/fl_- vertex/fl_end path) . . . . .	747
<a href="#">Fl_Dial.H</a> ( <a href="#">Fl_Dial</a> widget) . . . . .	748
<a href="#">Fl_Double_Window.H</a> ( <a href="#">Fl_Double_Window</a> widget) . . . . .	749
<a href="#">fl_draw.H</a> (Utility header to pull drawing functions together) . . . . .	750
<a href="#">Fl_Export.H</a> . . . . .	??
<a href="#">Fl_File_Browser.H</a> ( <a href="#">Fl_File_Browser</a> widget) . . . . .	763
<a href="#">Fl_File_Chooser.H</a> . . . . .	??
<a href="#">Fl_File_Icon.H</a> ( <a href="#">Fl_File_Icon</a> widget) . . . . .	764
<a href="#">Fl_File_Input.H</a> ( <a href="#">Fl_File_Input</a> widget) . . . . .	765
<a href="#">Fl_Fill_Dial.H</a> ( <a href="#">Fl_Fill_Dial</a> widget) . . . . .	766
<a href="#">Fl_Fill_Slider.H</a> ( <a href="#">Fl_Fill_Slider</a> widget) . . . . .	767
<a href="#">Fl_Float_Input.H</a> ( <a href="#">Fl_Float_Input</a> widget) . . . . .	768
<a href="#">Fl_Font.H</a> . . . . .	??
<a href="#">Fl_FormsBitmap.H</a> ( <a href="#">Fl_FormsBitmap</a> widget) . . . . .	769
<a href="#">Fl_FormsPixmap.H</a> ( <a href="#">Fl_FormsPixmap</a> widget) . . . . .	770
<a href="#">Fl_Free.H</a> ( <a href="#">Fl_Free</a> widget) . . . . .	771
<a href="#">Fl_GIF_Image.H</a> ( <a href="#">Fl_GIF_Image</a> widget) . . . . .	773
<a href="#">Fl_Gl_Choice.H</a> . . . . .	??
<a href="#">Fl_Gl_Window.H</a> ( <a href="#">Fl_Gl_Window</a> widget) . . . . .	774
<a href="#">Fl_Group.H</a> ( <a href="#">Fl_Group</a> , <a href="#">Fl_End</a> classes) . . . . .	775
<a href="#">Fl_Help_Dialog.H</a> ( <a href="#">Fl_Help_Dialog</a> widget) . . . . .	776
<a href="#">Fl_Help_View.H</a> ( <a href="#">Fl_Help_View</a> widget) . . . . .	777
<a href="#">Fl_Hold_Browser.H</a> ( <a href="#">Fl_Hold_Browser</a> widget) . . . . .	778
<a href="#">Fl_Hor_Fill_Slider.H</a> ( <a href="#">Fl_Hor_Fill_Slider</a> widget) . . . . .	779
<a href="#">Fl_Hor_Nice_Slider.H</a> ( <a href="#">Fl_Hor_Nice_Slider</a> widget) . . . . .	780
<a href="#">Fl_Hor_Slider.H</a> ( <a href="#">Fl_Hor_Slider</a> widget) . . . . .	781
<a href="#">Fl_Hor_Value_Slider.H</a> ( <a href="#">Fl_Hor_Value_Slider</a> widget) . . . . .	782
<a href="#">Fl_Image.H</a> ( <a href="#">Fl_Image</a> , <a href="#">Fl_RGB_Image</a> classes) . . . . .	783
<a href="#">Fl_Input.H</a> ( <a href="#">Fl_Input</a> widget) . . . . .	784
<a href="#">Fl_Input_.H</a> ( <a href="#">Fl_Input_</a> widget) . . . . .	785
<a href="#">Fl_Input_Choice.H</a> ( <a href="#">Fl_Input_Choice</a> widget) . . . . .	786
<a href="#">Fl_Int_Input.H</a> ( <a href="#">Fl_Int_Input</a> widget) . . . . .	787
<a href="#">Fl_JPEG_Image.H</a> ( <a href="#">Fl_JPEG_Image</a> class) . . . . .	788
<a href="#">Fl_Light_Button.H</a> ( <a href="#">Fl_Light_Button</a> widget) . . . . .	789
<a href="#">Fl_Line_Dial.H</a> ( <a href="#">Fl_Line_Dial</a> widget) . . . . .	790
<a href="#">Fl_Menu.H</a> . . . . .	??
<a href="#">Fl_Menu_.H</a> ( <a href="#">Fl_Menu_</a> widget) . . . . .	791
<a href="#">Fl_Menu_Bar.H</a> ( <a href="#">Fl_Menu_Bar</a> widget) . . . . .	792
<a href="#">Fl_Menu_Button.H</a> ( <a href="#">Fl_Menu_Button</a> widget) . . . . .	793
<a href="#">Fl_Menu_Item.H</a> . . . . .	??
<a href="#">Fl_Menu_Window.H</a> ( <a href="#">Fl_Menu_Window</a> widget) . . . . .	794
<a href="#">fl_message.H</a> . . . . .	??
<a href="#">Fl_Multi_Browser.H</a> ( <a href="#">Fl_Multi_Browser</a> widget) . . . . .	795
<a href="#">Fl_Multi_Label.H</a> . . . . .	??
<a href="#">Fl_Multiline_Input.H</a> ( <a href="#">Fl_Multiline_Input</a> widget) . . . . .	796
<a href="#">Fl_Multiline_Output.H</a> ( <a href="#">Fl_Multiline_Output</a> widget) . . . . .	797

<a href="#">Fl_Nice_Slider.H</a> (Fl_Nice_Slider widget ) . . . . .	798
<a href="#">Fl_Object.H</a> . . . . .	??
<a href="#">Fl_Output.H</a> (Fl_Output widget ) . . . . .	799
<a href="#">Fl_Overlay_Window.H</a> (Fl_Overlay_Window class ) . . . . .	800
<a href="#">Fl_Pack.H</a> (Fl_Pack widget ) . . . . .	801
<a href="#">Fl_Pixmap.H</a> (Fl_Pixmap widget ) . . . . .	802
<a href="#">Fl_PNG_Image.H</a> (Fl_PNG_Image class ) . . . . .	803
<a href="#">Fl_PNM_Image.H</a> (Fl_PNM_Image class ) . . . . .	804
<a href="#">Fl_Positioner.H</a> (Fl_Positioner widget ) . . . . .	805
<a href="#">Fl_Preferences.H</a> (Fl_Preferences class ) . . . . .	806
<a href="#">Fl_Progress.H</a> (Fl_Progress widget ) . . . . .	807
<a href="#">Fl_Radio_Button.H</a> (Fl_Radio_Button widget ) . . . . .	808
<a href="#">Fl_Radio_Light_Button.H</a> (Fl_Radio_Light_Button widget ) . . . . .	809
<a href="#">Fl_Radio_Round_Button.H</a> (Fl_Radio_Round_Button widget ) . . . . .	810
<a href="#">fl_rect.cxx</a> (Drawing and clipping routines for rectangles ) . . . . .	811
<a href="#">Fl_Repeat_Button.H</a> (Fl_Repeat_Button widget ) . . . . .	815
<a href="#">Fl_Return_Button.H</a> (Fl_Return_Button widget ) . . . . .	816
<a href="#">Fl_RGB_Image.H</a> . . . . .	??
<a href="#">Fl_Roller.H</a> (Fl_Roller widget ) . . . . .	817
<a href="#">Fl_Round_Button.H</a> (Fl_Round_Button widget ) . . . . .	818
<a href="#">Fl_Round_Clock.H</a> (Fl_Round_Clock widget ) . . . . .	819
<a href="#">Fl_Scroll.H</a> (Fl_Scroll widget ) . . . . .	820
<a href="#">Fl_Scrollbar.H</a> (Fl_Scrollbar widget ) . . . . .	821
<a href="#">Fl_Secret_Input.H</a> (Fl_Secret_Input widget ) . . . . .	822
<a href="#">Fl_Select_Browser.H</a> (Fl_Select_Browser widget ) . . . . .	823
<a href="#">Fl_Shared_Image.H</a> (Fl_Shared_Image class ) . . . . .	824
<a href="#">fl_show_colormap.H</a> . . . . .	??
<a href="#">fl_show_input.H</a> . . . . .	??
<a href="#">Fl_Simple_Counter.H</a> (Fl_Simple_Counter widget ) . . . . .	825
<a href="#">Fl_Single_Window.H</a> (Fl_Single_Window class ) . . . . .	826
<a href="#">Fl_Slider.H</a> (Fl_Slider widget ) . . . . .	827
<a href="#">Fl_Spinner.H</a> (Fl_Spinner widget ) . . . . .	828
<a href="#">Fl_Sys_Menu_Bar.H</a> . . . . .	??
<a href="#">Fl_Tabs.H</a> (Fl_Tabs widget ) . . . . .	829
<a href="#">Fl_Text_Buffer.H</a> (Fl_Text_Buffer, Fl_Text_Selection widget ) . . . . .	830
<a href="#">Fl_Text_Display.H</a> (Fl_Text_Display widget ) . . . . .	831
<a href="#">Fl_Text_Editor.H</a> (Fl_Text_Editor widget ) . . . . .	832
<a href="#">Fl_Tile.H</a> (Fl_Tile widget ) . . . . .	833
<a href="#">Fl_Tiled_Image.H</a> (Fl_Tiled_Image widget ) . . . . .	834
<a href="#">Fl_Timer.H</a> (Fl_Timer widget ) . . . . .	835
<a href="#">Fl_Toggle_Button.H</a> (Fl_Toggle_Button widget ) . . . . .	836
<a href="#">Fl_Toggle_Light_Button.H</a> . . . . .	??
<a href="#">Fl_Toggle_Round_Button.H</a> . . . . .	??
<a href="#">Fl_Tooltip.H</a> (Fl_Tooltip widget ) . . . . .	837
<a href="#">fl_types.h</a> (This file contains simple "C"-style type definitions ) . . . . .	838
<a href="#">fl_utf8.h</a> . . . . .	??
<a href="#">Fl_Valuator.H</a> (Fl_Valuator widget ) . . . . .	839
<a href="#">Fl_Value_Input.H</a> (Fl_Value_Input widget ) . . . . .	840
<a href="#">Fl_Value_Output.H</a> (Fl_Value_Output widget ) . . . . .	841
<a href="#">Fl_Value_Slider.H</a> (Fl_Value_Slider widget ) . . . . .	842
<a href="#">fl_vertex.cxx</a> (Portable drawing code for drawing arbitrary shapes with simple 2D transformations ) . . . . .	843
<a href="#">Fl_Widget.H</a> (Fl_Widget, Fl_Label classes ) . . . . .	849
<a href="#">Fl_Window.H</a> (Fl_Window widget ) . . . . .	850

<a href="#">Fl_Wizard.H</a> ( <a href="#">Fl_Wizard</a> widget ) . . . . .	851
<a href="#">Fl_XBM_Image.H</a> ( <a href="#">Fl_XBM_Image</a> class ) . . . . .	852
<a href="#">Fl_XColor.H</a> . . . . .	??
<a href="#">Fl_XPM_Image.H</a> ( <a href="#">Fl_XPM_Image</a> class ) . . . . .	853
<a href="#">flstring.h</a> . . . . .	??
<a href="#">forms.H</a> . . . . .	??
<a href="#">freeglut_teapot_data.h</a> . . . . .	??
<a href="#">gb2312.h</a> . . . . .	??
<a href="#">georgian_academy.h</a> . . . . .	??
<a href="#">georgian_ps.h</a> . . . . .	??
<a href="#">gl.h</a> . . . . .	??
<a href="#">gl2opengl.h</a> . . . . .	??
<a href="#">gl_draw.H</a> . . . . .	??
<a href="#">glu.h</a> . . . . .	??
<a href="#">glut.H</a> . . . . .	??
<a href="#">iso8859_1.h</a> . . . . .	??
<a href="#">iso8859_10.h</a> . . . . .	??
<a href="#">iso8859_11.h</a> . . . . .	??
<a href="#">iso8859_13.h</a> . . . . .	??
<a href="#">iso8859_14.h</a> . . . . .	??
<a href="#">iso8859_15.h</a> . . . . .	??
<a href="#">iso8859_16.h</a> . . . . .	??
<a href="#">iso8859_2.h</a> . . . . .	??
<a href="#">iso8859_3.h</a> . . . . .	??
<a href="#">iso8859_4.h</a> . . . . .	??
<a href="#">iso8859_5.h</a> . . . . .	??
<a href="#">iso8859_6.h</a> . . . . .	??
<a href="#">iso8859_7.h</a> . . . . .	??
<a href="#">iso8859_8.h</a> . . . . .	??
<a href="#">iso8859_9.h</a> . . . . .	??
<a href="#">iso8859_9e.h</a> . . . . .	??
<a href="#">jisx0201.h</a> . . . . .	??
<a href="#">jisx0208.h</a> . . . . .	??
<a href="#">jisx0212.h</a> . . . . .	??
<a href="#">koi8_c.h</a> . . . . .	??
<a href="#">koi8_r.h</a> . . . . .	??
<a href="#">koi8_u.h</a> . . . . .	??
<a href="#">ksc5601.h</a> . . . . .	??
<a href="#">mac.H</a> . . . . .	??
<a href="#">math.h</a> . . . . .	??
<a href="#">mediumarrow.h</a> . . . . .	??
<a href="#">mulelao.h</a> . . . . .	??
<a href="#">names.h</a> . . . . .	??
<a href="#">slowarrow.h</a> . . . . .	??
<a href="#">spacing.h</a> . . . . .	??
<a href="#">symbol_h</a> . . . . .	??
<a href="#">tatar_cyr.h</a> . . . . .	??
<a href="#">tcvn.h</a> . . . . .	??
<a href="#">tis620.h</a> . . . . .	??
<a href="#">ucs2be.h</a> . . . . .	??
<a href="#">utf8.h</a> . . . . .	??
<a href="#">viscii.h</a> . . . . .	??
<a href="#">win32.H</a> . . . . .	??
<a href="#">x.H</a> . . . . .	??

<b>Ximint.h</b>	.. . . . .	??
<b>Xlibint.h</b>	.. . . . .	??
<b>Xutf8.h</b>	.. . . . .	??



# Chapter 29

## Module Documentation

### 29.1 Windows handling functions

Windows and standard dialogs handling.

#### Functions

- static `Fl_Window * Fl::first_window ()`  
*Returns the first top-level window in the list of shown() windows.*
- static void `Fl::first_window (Fl_Window *)`  
*See `Fl_Window* first_window()`.*
- static `Fl_Window * Fl::next_window (const Fl_Window *)`  
*Returns the next top-level window in the list of shown() windows.*
- static `Fl_Window * Fl::modal ()`  
*Returns the top-most `modal()` window currently shown.*
- static `Fl_Window * Fl::grab ()`  
*This is used when pop-up menu systems are active.*
- static void `Fl::grab (Fl_Window *)`  
*Selects the window to grab.*
- static void `Fl::set_abort (void(*f)(const char *,...))`  
*For back compatibility, sets the void `Fl::fatal` handler callback.*
- static void `Fl::default_atclose (Fl_Window *, void *)`  
*Default callback for window widgets.*
- static void `Fl::set_atclose (void(*f)(Fl_Window *, void *))`  
*For back compatibility, sets the `Fl::atclose` handler callback.*

## Variables

- static void(\* Fl::atclose )(Fl\_Window \*, void \*) = default\_atclose

*Back compatibility: default window callback handler.*

### 29.1.1 Detailed Description

Windows and standard dialogs handling.

### 29.1.2 Function Documentation

#### 29.1.2.1 void Fl::default\_atclose (Fl\_Window \* *window*, void \* *v*) [static, inherited]

Default callback for window widgets.

It hides the window and then calls the default widget callback.

References Fl\_Widget::default\_callback(), and Fl\_Window::hide().

#### 29.1.2.2 Fl\_Window \* Fl::first\_window () [static, inherited]

Returns the first top-level window in the list of shown() windows.

If a [modal\(\)](#) window is shown this is the top-most modal window, otherwise it is the most recent window to get an event.

The second form sets the window that is returned by first\_window. The window is removed from wherever it is in the list and inserted at the top. This is not done if [Fl::modal\(\)](#) is on or if the window is not shown(). Because the first window is used to set the "parent" of modal windows, this is often useful.

References Fl\_Widget::w().

Referenced by Fl::get\_system\_colors(), Fl::grab(), Fl::handle(), Fl\_Window::hide(), Fl::reload\_scheme(), Fl::scheme(), and Fl\_Window::show().

#### 29.1.2.3 void Fl::grab (Fl\_Window \* *win*) [static, inherited]

Selects the window to grab.

See Fl\_Window\* [Fl::grab\(\)](#)

References Fl::first\_window().

#### 29.1.2.4 static Fl\_Window\* Fl::grab () [inline, static, inherited]

This is used when pop-up menu systems are active.

Send all events to the passed window no matter where the pointer or focus is (including in other programs). The window *does not have to be shown()*, this lets the [handle\(\)](#) method of a "dummy" window override all event handling and allows you to map and unmap a complex set of windows (under both X and WIN32 *some* window must be mapped because the system interface needs a window id).

If [grab\(\)](#) is on it will also affect show() of windows by doing system-specific operations (on X it turns on override-redirect). These are designed to make menus popup reliably and faster on the system.

To turn off grabbing do Fl::grab(0).

*Be careful that your program does not enter an infinite loop while [grab\(\)](#) is on. On X this will lock up your screen!* To avoid this potential lockup, all newer operating systems seem to limit mouse pointer grabbing to the time during which a mouse button is held down. Some OS's may not support grabbing at all.

Referenced by Fl::belowmouse(), Fl::focus(), Fl::handle(), and Fl\_Menu\_Item::popupdown().

#### 29.1.2.5 static Fl\_Window\* Fl::modal () [inline, static, inherited]

Returns the top-most [modal\(\)](#) window currently shown.

This is the most recently shown() window with [modal\(\)](#) true, or NULL if there are no [modal\(\)](#) windows shown(). The [modal\(\)](#) window has its [handle\(\)](#) method called for all events, and no other windows will have [handle\(\)](#) called ([grab\(\)](#) overrides this).

Referenced by Fl::handle().

#### 29.1.2.6 Fl\_Window \* Fl::next\_window (const Fl\_Window \* *window*) [static, inherited]

Returns the next top-level window in the list of shown() windows.

You can use this call to iterate through all the windows that are shown().

References Fl\_Widget::w().

Referenced by Fl\_Window::hide(), and Fl::reload\_scheme().

#### 29.1.2.7 static void Fl::set\_atclose (void(\*)(Fl\_Window \*, void \*)*f*) [inline, static, inherited]

For back compatibility, sets the [Fl::atclose](#) handler callback.

You can now simply change the callback for the window instead

**See also:**

[Fl\\_Window::callback\(Fl\\_Callback\\*\)](#)

### 29.1.3 Variable Documentation

#### 29.1.3.1 void(\* Fl::atclose)(Fl\_Window \*, void \*) (Fl\_Window \*, void \*) = default\_atclose [static, inherited]

Back compatibility: default window callback handler.

**See also:**

[Fl::set\\_atclose\(\)](#)

Referenced by Fl\_Window::default\_callback().

## 29.2 Events handling functions

[Fl](#) class events handling API.

### Functions

- static int [Fl::event\(\)](#)

*Returns the last event that was processed.*
- static int [Fl::event\\_x\(\)](#)

*Returns the mouse position of the event relative to the [Fl\\_Window](#) it was passed to.*
- static int [Fl::event\\_y\(\)](#)

*Returns the mouse position of the event relative to the [Fl\\_Window](#) it was passed to.*
- static int [Fl::event\\_x\\_root\(\)](#)

*Returns the mouse position on the screen of the event.*
- static int [Fl::event\\_y\\_root\(\)](#)

*Returns the mouse position on the screen of the event.*
- static int [Fl::event\\_dx\(\)](#)

*Returns the current horizontal mouse scrolling associated with the [FL\\_MOUSEWHEEL](#) event.*
- static int [Fl::event\\_dy\(\)](#)

*Returns the current vertical mouse scrolling assoiated with the [FL\\_MOUSEWHEEL](#) event.*
- static void [Fl::get\\_mouse\(int &, int &\)](#)

*Return where the mouse is on the screen by doing a round-trip query to the server.*
- static int [Fl::event\\_clicks\(\)](#)

*Returns non zero if we had a double click event.*
- static void [Fl::event\\_clicks\(int i\)](#)

*Manually sets the number returned by [Fl::event\\_clicks\(\)](#).*
- static int [Fl::event\\_is\\_click\(\)](#)

*The first form returns non-zero if the mouse has not moved far enough and not enough time has passed since the last [FL\\_PUSH](#) or [FL\\_KEYBOARD](#) event for it to be considered a "drag" rather than a "click".*
- static void [Fl::event\\_is\\_click\(int i\)](#)

*Only i=0 works! See int [event\\_is\\_click\(\)](#).*
- static int [Fl::event\\_button\(\)](#)

*Gets which particular mouse button caused the current event.*
- static int [Fl::event\\_state\(\)](#)

*This is a bitfield of what shift states were on and what mouse buttons were held down during the most recent event.*

- static int [Fl::event\\_state](#) (int i)  
*See int [event\\_state\(\)](#).*
- static int [Fl::event\\_key](#) ()  
*Gets which key on the keyboard was last pushed.*
- static int [Fl::event\\_original\\_key](#) ()  
*If NumLock is deactivated, FLTK translates events from the numeric keypad into the corresponding arrow key events.*
- static int [Fl::event\\_key](#) (int key)  
*Returns true if the given key was held down (or pressed) during the last event.*
- static int [Fl::get\\_key](#) (int key)  
*Returns true if the given key is held down now.*
- static const char \* [Fl::event\\_text](#) ()  
*Returns the text associated with the current FL\_PASTE or FL\_DND\_RELEASE event.*
- static int [Fl::event\\_length](#) ()  
*Returns the length of the text in [Fl::event\\_text\(\)](#).*
- static int [Fl::compose](#) (int &del)  
*Any text editing widget should call this for each FL\_KEYBOARD event.*
- static void [Fl::compose\\_reset](#) ()  
*If the user moves the cursor, be sure to call [Fl::compose\\_reset\(\)](#).*
- static int [Fl::event\\_inside](#) (int, int, int, int)  
*Returns whether or not the mouse event is inside the given rectangle.*
- static int [Fl::event\\_inside](#) (const [Fl\\_Widget](#) \*)  
*Returns whether or not the mouse event is inside the given widget.*
- static int [Fl::test\\_shortcut](#) (int)  
*Test the current event, which must be an FL\_KEYBOARD or FL\_SHORTCUT, against a shortcut value (described in [Fl\\_Button](#)).*
- static int [Fl::handle](#) (int, [Fl\\_Window](#) \*)  
*Sends the event to a window for processing.*
- static [Fl\\_Widget](#) \* [Fl::belowmouse](#) ()  
*Gets the widget that is below the mouse.*
- static void [Fl::belowmouse](#) ([Fl\\_Widget](#) \*)  
*Sets the widget that is below the mouse.*
- static [Fl\\_Widget](#) \* [Fl::pushed](#) ()  
*Sets the widget that is being pushed.*

- static void `Fl::pushed (Fl_Widget *)`  
*Sets the widget that is being pushed.*
- static `Fl_Widget * Fl::focus ()`  
*Gets the current `Fl::focus()` widget.*
- static void `Fl::focus (Fl_Widget *)`  
*Sets the widget that will receive `FL_KEYBOARD` events.*
- static void `Fl::add_handler (int(*h)(int))`  
*Install a function to parse unrecognized events.*
- static void `Fl::remove_handler (int(*h)(int))`  
*Removes a previously added event handler.*
- static int `Fl::event_shift ()`  
*Returns non-zero if the Shift key is pressed.*
- static int `Fl::event_ctrl ()`  
*Returns non-zero if the Control key is pressed.*
- static int `Fl::event_alt ()`  
*Returns non-zero if the Alt key is pressed.*
- static int `Fl::event_buttons ()`  
*Returns the mouse buttons state bits; if non-zero, then at least one button is pressed now.*
- static int `Fl::event_button1 ()`  
*Returns non-zero if mouse button 1 is currently held down.*
- static int `Fl::event_button2 ()`  
*Returns non-zero if button 2 is currently held down.*
- static int `Fl::event_button3 ()`  
*Returns non-zero if button 3 is currently held down.*

### 29.2.1 Detailed Description

`Fl` class events handling API.

### 29.2.2 Function Documentation

#### 29.2.2.1 void `Fl::add_handler (int(*)(int) ha)` [static, inherited]

Install a function to parse unrecognized events.

If FLTK cannot figure out what to do with an event, it calls each of these functions (most recent first) until one of them returns non-zero. If none of them returns non zero then the event is ignored. Events that cause this to be called are:

- FL\_SHORTCUT events that are not recognized by any widget. This lets you provide global shortcut keys.
- System events that FLTK does not recognize. See [fl\\_xevent](#).
- *Some* other events when the widget FLTK selected returns zero from its [handle\(\)](#) method. Exactly which ones may change in future versions, however.

Referenced by [Fl\\_Menu\\_::global\(\)](#).

#### **29.2.2.2 void Fl::belowmouse (Fl\_Widget \* o) [static, inherited]**

Sets the widget that is below the mouse.

This is for highlighting buttons. It is not used to send FL\_PUSH or FL\_MOVE directly, for several obscure reasons, but those events typically go to this widget. This is also the first widget tried for FL\_SHORTCUT events.

If you change the belowmouse widget, the previous one and all parents (that don't contain the new widget) are sent FL\_LEAVE events. Changing this does *not* send FL\_ENTER to this or any widget, because sending FL\_ENTER is supposed to *test* if the widget wants the mouse (by it returning non-zero from [handle\(\)](#)).

References [Fl\\_Widget::contains\(\)](#), [FL\\_DND\\_LEAVE](#), [FL\\_LEAVE](#), [Fl::grab\(\)](#), [Fl\\_Widget::handle\(\)](#), and [Fl\\_Widget::parent\(\)](#).

#### **29.2.2.3 static Fl\_Widget\* Fl::belowmouse () [inline, static, inherited]**

Gets the widget that is below the mouse.

See also:

[belowmouse\(Fl\\_Widget\\*\)](#)

Referenced by [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Input::handle\(\)](#), [Fl\\_Group::handle\(\)](#), and [Fl::handle\(\)](#).

#### **29.2.2.4 int Fl::compose (int & del) [static, inherited]**

Any text editing widget should call this for each FL\_KEYBOARD event.

Use of this function is very simple.

If *true* is returned, then it has modified the [Fl::event\\_text\(\)](#) and [Fl::event\\_length\(\)](#) to a set of *bytes* to insert (it may be of zero length!). It will also set the "del" parameter to the number of *bytes* to the left of the cursor to delete, this is used to delete the results of the previous call to [Fl::compose\(\)](#).

If *false* is returned, the keys should be treated as function keys, and del is set to zero. You could insert the text anyways, if you don't know what else to do.

Though the current implementation returns immediately, future versions may take quite awhile, as they may pop up a window or do other user-interface things to allow characters to be selected.

References [FL\\_ALT](#), [FL\\_Alt\\_L](#), [FL\\_Alt\\_R](#), [FL\\_Control\\_L](#), [FL\\_Control\\_R](#), [FL\\_Menu](#), [FL\\_META](#), [FL\\_Meta\\_L](#), [FL\\_Meta\\_R](#), [FL\\_Shift\\_L](#), and [FL\\_Shift\\_R](#).

Referenced by [Fl\\_Text\\_Editor::handle\\_key\(\)](#).

**29.2.2.5 static void Fl::compose\_reset () [inline, static, inherited]**

If the user moves the cursor, be sure to call [Fl::compose\\_reset\(\)](#).

The next call to [Fl::compose\(\)](#) will start out in an initial state. In particular it will not set "del" to non-zero. This call is very fast so it is ok to call it many times and in many places.

Referenced by [Fl::focus\(\)](#).

**29.2.2.6 static int Fl::event () [inline, static, inherited]**

Returns the last event that was processed.

This can be used to determine if a callback is being done in response to a keypress, mouse click, etc.

Referenced by [Fl::dnd\(\)](#), and [Fl\\_Tabs::handle\(\)](#).

**29.2.2.7 static int Fl::event\_alt () [inline, static, inherited]**

Returns non-zero if the Alt key is pressed.

References [FL\\_ALT](#).

**29.2.2.8 static int Fl::event\_button () [inline, static, inherited]**

Gets which particular mouse button caused the current event.

This returns garbage if the most recent event was not a [FL\\_PUSH](#) or [FL\\_RELEASE](#) event.

**Return values:**

[\*FL\\_LEFT\\_MOUSE\*](#)

[\*FL\\_MIDDLE\\_MOUSE\*](#)

[\*FL\\_RIGHT\\_MOUSE\*](#).

**See also:**

[Fl::event\\_buttons\(\)](#)

References [FL\\_Button](#).

Referenced by [Fl\\_Glut\\_Window::handle\(\)](#), [Fl\\_Free::handle\(\)](#), [Fl\\_Value\\_Output::handle\(\)](#), [Fl\\_Value\\_Input::handle\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Scrollbar::handle\(\)](#), [Fl\\_Menu\\_Button::handle\(\)](#), and [Fl\\_Input::handle\(\)](#).

**29.2.2.9 static int Fl::event\_button1 () [inline, static, inherited]**

Returns non-zero if mouse button 1 is currently held down.

For more details, see [Fl::event\\_buttons\(\)](#).

References [FL\\_BUTTON1](#).

**29.2.2.10 static int Fl::event\_button2 () [inline, static, inherited]**

Returns non-zero if button 2 is currently held down.

For more details, see [Fl::event\\_buttons\(\)](#).

References FL\_BUTTON2.

**29.2.2.11 static int Fl::event\_button3 () [inline, static, inherited]**

Returns non-zero if button 3 is currently held down.

For more details, see [Fl::event\\_buttons\(\)](#).

References FL\_BUTTON3.

**29.2.2.12 static int Fl::event\_buttons () [inline, static, inherited]**

Returns the mouse buttons state bits; if non-zero, then at least one button is pressed now.

This function returns the button state at the time of the event. During an FL\_RELEASE event, the state of the released button will be 0. To find out, which button caused an FL\_RELEASE event, you can use [Fl::event\\_button\(\)](#) instead.

**Returns:**

a bit mask value like { [FL\_BUTTON1] | [FL\_BUTTON2] | [FL\_BUTTON3] }

**29.2.2.13 static void Fl::event\_clicks (int i) [inline, static, inherited]**

Manually sets the number returned by [Fl::event\\_clicks\(\)](#).

This can be used to set it to zero so that later code does not think an item was double-clicked.

**Parameters:**

← *i* correspond to no double-click if 0, *i*+1 mouse clicks otherwise

**See also:**

int [event\\_clicks\(\)](#)

**29.2.2.14 static int Fl::event\_clicks () [inline, static, inherited]**

Returns non zero if we had a double click event.

**Return values:**

**Non-zero** if the most recent FL\_PUSH or FL\_KEYBOARD was a "double click".

**N-1** for N clicks. A double click is counted if the same button is pressed again while [event\\_is\\_click\(\)](#) is true.

Referenced by [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Input::handle\(\)](#), and [Fl\\_Browser\\_::handle\(\)](#).

**29.2.2.15 static int Fl::event\_ctrl () [inline, static, inherited]**

Returns non-zero if the Control key is pressed.

References FL\_CTRL.

**29.2.2.16 static int Fl::event\_dx () [inline, static, inherited]**

Returns the current horizontal mouse scrolling associated with the FL\_MOUSEWHEEL event.

Right is positive.

**29.2.2.17 static int Fl::event\_dy () [inline, static, inherited]**

Returns the current vertical mouse scrolling assoaciated with the FL\_MOUSEWHEEL event.

Down is positive.

Referenced by Fl\_Glut\_Window::handle(), and Fl\_Text\_Display::handle().

**29.2.2.18 int Fl::event\_inside (const Fl\_Widget \* o) [static, inherited]**

Returns whether or not the mouse event is inside the given widget.

Returns non-zero if the current event\_x and event\_y put it inside the widget or inside an arbitrary bounding box. You should always call this rather than doing your own comparison so you are consistent about edge effects.

References Fl::h(), Fl::w(), Fl\_Widget::x(), and Fl\_Widget::y().

**29.2.2.19 int Fl::event\_inside (int xx, int yy, int ww, int hh) [static, inherited]**

Returns whether or not the mouse event is inside the given rectangle.

Returns non-zero if the current event\_x and event\_y put it inside the widget or inside an arbitrary bounding box. You should always call this rather than doing your own comparison so you are consistent about edge effects.

Referenced by Fl\_Text\_Display::handle(), Fl\_Repeat\_Button::handle(), Fl\_Group::handle(), Fl\_Button::handle(), and Fl\_Browser\_::handle().

**29.2.2.20 static int Fl::event\_is\_click () [inline, static, inherited]**

The first form returns non-zero if the mouse has not moved far enough and not enough time has passed since the last FL\_PUSH or FL\_KEYBOARD event for it to be considered a "drag" rather than a "click".

You can test this on FL\_DRAG, FL\_RELEASE, and FL\_MOVE events. The second form clears the value returned by [Fl::event\\_is\\_click\(\)](#). Useful to prevent the *next* click from being counted as a double-click or to make a popup menu pick an item with a single click. Don't pass non-zero to this.

Referenced by Fl\_Value\_Input::handle(), Fl\_Input::handle(), and Fl\_Adjuster::handle().

**29.2.2.21 int Fl::event\_key (int key) [static, inherited]**

Returns true if the given *key* was held down (or pressed) *during* the last event.

This is constant until the next event is read from the server.

`Fl::get_key(int)` returns true if the given key is held down *now*. Under X this requires a round-trip to the server and is *much* slower than `Fl::event_key(int)`.

Keys are identified by the *unshifted* values. FLTK defines a set of symbols that should work on most modern machines for every key on the keyboard:

- All keys on the main keyboard producing a printable ASCII character use the value of that ASCII character (as though shift, ctrl, and caps lock were not on). The space bar is 32.
- All keys on the numeric keypad producing a printable ASCII character use the value of that ASCII character plus `FL_KP`. The highest possible value is `FL_KP_Last` so you can range-check to see if something is on the keypad.
- All numbered function keys use the number on the function key plus `FL_F`. The highest possible number is `FL_F_Last`, so you can range-check a value.
- Buttons on the mouse are considered keys, and use the button number (where the left button is 1) plus `FL_Button`.
- All other keys on the keypad have a symbol: `FL_Escape`, `FL_BackSpace`, `FL_Tab`, `FL_Enter`, `FL_Print`, `FL_Scroll_Lock`, `FL_Pause`, `FL_Insert`, `FL_Home`, `FL_Page_Up`, `FL_Delete`, `FL_End`, `FL_Page_Down`, `FL_Left`, `FL_Up`, `FL_Right`, `FL_Down`, `FL_Shift_L`, `FL_Shift_R`, `FL_Control_L`, `FL_Control_R`, `FL_Caps_Lock`, `FL_Alt_L`, `FL_Alt_R`, `FL_Meta_L`, `FL_Meta_R`, `FL_Menu`, `FL_Num_Lock`, `FL_KP_Enter`. Be careful not to confuse these with the very similar, but all-caps, symbols used by `Fl::event_state()`.

On X `Fl::get_key(FL_Button+n)` does not work.

On WIN32 `Fl::get_key(FL_KP_Enter)` and `Fl::event_key(FL_KP_Enter)` do not work.

References `Fl::event_state()`, `FL_Button`, `FL_Menu`, `FL_Meta_L`, and `FL_Meta_R`.

### 29.2.2.22 static int Fl::event\_key () [inline, static, inherited]

Gets which key on the keyboard was last pushed.

#### Return values:

`0` if the last event was not a key press or release.

#### See also:

`int event_key(int)`

Referenced by `Fl::get_key()`, `Fl_Glut_Window::handle()`, `Fl_Free::handle()`, `Fl_Text_Display::handle()`, `Fl_Tabs::handle()`, `Fl_Spinner::handle()`, `Fl_Scrollbar::handle()`, `Fl_Roller::handle()`, `Fl_Return_Button::handle()`, `Fl_Menu_Button::handle()`, `Fl_Input::handle()`, `Fl_Group::handle()`, `Fl_Counter::handle()`, `Fl_Choice::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Adjuster::handle()`, `Fl::handle()`, `Fl_Text_Editor::handle_key()`, and `Fl::test_shortcut()`.

### 29.2.2.23 static int Fl::event\_length () [inline, static, inherited]

Returns the length of the text in `Fl::event_text()`.

There will always be a nul at this position in the text. However there may be a nul before that if the keystroke translates to a nul character or you paste a nul character.

Referenced by `Fl_Text_Editor::handle_key()`.

#### **29.2.2.24 static int Fl::event\_original\_key () [inline, static, inherited]**

If NumLock is deactivated, FLTK translates events from the numeric keypad into the corresponding arrow key events.

`event_key()` returns the translated key code, whereas `event_original_key()` returns the keycode before NumLock translation.

#### **29.2.2.25 static int Fl::event\_shift () [inline, static, inherited]**

Returns non-zero if the Shift key is pressed.

References `FL_SHIFT`.

#### **29.2.2.26 static int Fl::event\_state () [inline, static, inherited]**

This is a bitfield of what shift states were on and what mouse buttons were held down during the most recent event.

The second version returns non-zero if any of the passed bits are turned on. The legal bits are:

- `FL_SHIFT`
- `FL_CAPS_LOCK`
- `FL_CTRL`
- `FL_ALT`
- `FL_NUM_LOCK`
- `FL_META`
- `FL_SCROLL_LOCK`
- `FL_BUTTON1`
- `FL_BUTTON2`
- `FL_BUTTON3`

X servers do not agree on shift states, and `FL_NUM_LOCK`, `FL_META`, and `FL_SCROLL_LOCK` may not work. The values were selected to match the XFree86 server on Linux. In addition there is a bug in the way X works so that the shift state is not correctly reported until the first event *after* the shift key is pressed or released.

Referenced by `Fl::event_key()`, `Fl_Text_Display::handle()`, `Fl_Menu_Button::handle()`, `Fl_Input::handle()`, `Fl_Choice::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Adjuster::handle()`, `Fl_Text_Editor::handle_key()`, and `Fl::test_shortcut()`.

**29.2.2.27 static const char\* Fl::event\_text () [inline, static, inherited]**

Returns the text associated with the current FL\_PASTE or FL\_DND\_RELEASE event.

Referenced by Fl\_Glut\_Window::handle(), Fl\_Text\_Editor::handle(), Fl::handle(), Fl\_Text\_Editor::handle\_key(), Fl\_Widget::test\_shortcut(), and Fl::test\_shortcut().

**29.2.2.28 static int Fl::event\_x\_root () [inline, static, inherited]**

Returns the mouse position on the screen of the event.

To find the absolute position of an [Fl\\_Window](#) on the screen, use the difference between [event\\_x\\_root\(\)](#), [event\\_y\\_root\(\)](#) and [event\\_x\(\)](#), [event\\_y\(\)](#).

Referenced by Fl\_Value\_Input::handle(), and Fl\_Menu\_Item::pulldown().

**29.2.2.29 static int Fl::event\_y\_root () [inline, static, inherited]**

Returns the mouse position on the screen of the event.

To find the absolute position of an [Fl\\_Window](#) on the screen, use the difference between [event\\_x\\_root\(\)](#), [event\\_y\\_root\(\)](#) and [event\\_x\(\)](#), [event\\_y\(\)](#).

Referenced by Fl\_Menu\_Item::pulldown().

**29.2.2.30 void Fl::focus (Fl\_Widget \* o) [static, inherited]**

Sets the widget that will receive FL\_KEYBOARD events.

If you change [Fl::focus\(\)](#), the previous widget and all parents (that don't contain the new widget) are sent FL\_UNFOCUS events. Changing the focus does *not* send FL\_FOCUS to this or any widget, because sending FL\_FOCUS is supposed to *test* if the widget wants the focus (by it returning non-zero from [handle\(\)](#)).

**See also:**

[Fl\\_Widget::take\\_focus\(\)](#)

References Fl::compose\_reset(), FL\_UNFOCUS, Fl::grab(), Fl\_Widget::handle(), Fl\_Widget::parent(), Fl\_Widget::visible\_focus(), and Fl\_Widget::window().

**29.2.2.31 static Fl\_Widget\* Fl::focus () [inline, static, inherited]**

Gets the current [Fl::focus\(\)](#) widget.

**See also:**

[Fl::focus\(Fl\\_Widget\\*\)](#)

Referenced by Fl\_Widget::activate(), Fl\_Text\_Display::clear\_rect(), Fl\_Text\_Display::draw(), Fl\_Roller::draw(), Fl\_Return\_Button::draw(), Fl\_Menu\_Button::draw(), Fl\_Light\_Button::draw(), Fl\_File\_Input::draw(), Fl\_Counter::draw(), Fl\_Choice::draw(), Fl\_Button::draw(), Fl\_Browser\_::draw(), Fl\_Adjuster::draw(), Fl\_Text\_Display::draw\_string(), Fl\_Input\_::drawtext(), Fl\_Value\_Slider::handle(), Fl\_Text\_Display::handle(), Fl\_Tabs::handle(), Fl\_Slider::handle(), Fl\_Roller::handle(), Fl\_Repeat\_Button::handle(), Fl\_Menu\_Button::handle(), Fl\_Input::handle(), Fl\_Group::handle(), Fl\_Counter::handle(), Fl\_Choice::handle(), Fl\_Button::handle(), Fl\_Adjuster::handle(), Fl::handle(), Fl\_Input\_::position(), Fl\_Widget::show(), and Fl\_Widget::take\_focus().

**29.2.2.32 int Fl::get\_key (int key) [static, inherited]**

Returns true if the given *key* is held down *now*.

Under X this requires a round-trip to the server and is *much* slower than [Fl::event\\_key\(int\)](#).

See also:

[event\\_key\(int\)](#)

References [Fl::event\\_key\(\)](#).

**29.2.2.33 static void Fl::get\_mouse (int &, int &) [static, inherited]**

Return where the mouse is on the screen by doing a round-trip query to the server.

You should use [Fl::event\\_x\\_root\(\)](#) and [Fl::event\\_y\\_root\(\)](#) if possible, but this is necessary if you are not sure if a mouse event has been processed recently (such as to position your first window). If the display is not open, this will open it.

Referenced by [Fl\\_Window::hotspot\(\)](#).

**29.2.2.34 int Fl::handle (int e, Fl\_Widget \*window) [static, inherited]**

Sends the event to a window for processing.

Returns non-zero if any widget uses the event.

References [Fl::belowmouse\(\)](#), [Fl\\_Tooltip::current\(\)](#), [Fl\\_Widget::do\\_callback\(\)](#), [Fl::event\\_key\(\)](#), [Fl::event\\_text\(\)](#), [Fl::first\\_window\(\)](#), [FL\\_CLOSE](#), [FL\\_DND\\_DRAG](#), [FL\\_DND\\_ENTER](#), [FL\\_DND\\_LEAVE](#), [FL\\_DND\\_RELEASE](#), [FL\\_DRAG](#), [FL\\_ENTER](#), [FL\\_Escape](#), [FL\\_FOCUS](#), [FL\\_HIDE](#), [FL\\_KEYBOARD](#), [FL\\_KEYUP](#), [FL\\_LEAVE](#), [FL\\_MOUSEWHEEL](#), [FL\\_MOVE](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [FL\\_SHORTCUT](#), [FL\\_SHOW](#), [FL\\_UNFOCUS](#), [Fl::focus\(\)](#), [Fl::grab\(\)](#), [Fl\\_Widget::hide\(\)](#), [Fl::modal\(\)](#), [Fl\\_Widget::parent\(\)](#), [Fl::pushed\(\)](#), [Fl\\_Window::show\(\)](#), [Fl\\_Widget::show\(\)](#), and [Fl\\_Widget::window\(\)](#).

**29.2.2.35 void Fl::pushed (Fl\_Widget \*o) [static, inherited]**

Sets the widget that is being pushed.

FL\_DRAG or FL\_RELEASE (and any more FL\_PUSH) events will be sent to this widget.

If you change the pushed widget, the previous one and all parents (that don't contain the new widget) are sent FL\_RELEASE events. Changing this does *not* send FL\_PUSH to this or any widget, because sending FL\_PUSH is supposed to *test* if the widget wants the mouse (by it returning non-zero from [handle\(\)](#)).

**29.2.2.36 static Fl\_Widget\* Fl::pushed () [inline, static, inherited]**

Sets the widget that is being pushed.

See also:

[Fl\\_Widget\\* pushed\(Fl\\_Widget\\*\)](#)

Referenced by [Fl::dnd\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), [Fl\\_Input\\_::drawtext\(\)](#), [Fl\\_Group::handle\(\)](#), and [Fl::handle\(\)](#).

**29.2.2.37 int Fl::test\_shortcut (int *shortcut*) [static, inherited]**

Test the current event, which must be an FL\_KEYBOARD or FL\_SHORTCUT, against a shortcut value (described in [Fl\\_Button](#)).

Returns non-zero if there is a match. Not to be confused with [Fl\\_Widget::test\\_shortcut\(\)](#).

References Fl::event\_key(), Fl::event\_state(), Fl::event\_text(), FL\_ALT, FL\_Alt\_L, FL\_Alt\_R, FL\_Backspace, FL\_Caps\_Lock, FL\_Control\_L, FL\_Control\_R, FL\_CTRL, FL\_Delete, FL\_Down, FL\_End, FL\_Enter, FL\_Escape, FL\_F, FL\_F\_Last, FL\_Home, FL\_Insert, FL\_KP, FL\_KP\_Enter, FL\_KP\_Last, FL\_Left, FL\_Menu, FL\_META, FL\_Meta\_L, FL\_Meta\_R, FL\_Num\_Lock, FL\_Page\_Down, FL\_Page\_Up, FL\_Pause, FL\_Print, FL\_Right, FL\_Scroll\_Lock, FL\_SHIFT, FL\_Shift\_L, FL\_Shift\_R, FL\_Tab, and FL\_Up.

Referenced by [Fl\\_Menu\\_Item::find\\_shortcut\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Button::handle\(\)](#), and [Fl\\_Menu\\_Item::test\\_shortcut\(\)](#).

## 29.3 Selection & Clipboard functions

fl global copy/cut/paste functions

### Functions

- static void [Fl::copy](#) (const char \*stuff, int len, int clipboard=0)  
*Copies the data pointed to by stuff to the selection (0) or primary (1) clipboard.*
- static void [Fl::paste](#) ([Fl\\_Widget](#) &receiver, int clipboard)  
*Pastes the data from the selection (0) or primary (1) clipboard into receiver.*
- static int [Fl::dnd](#) ()  
*Initiate a Drag And Drop operation.*
- static [Fl\\_Widget](#) \* [Fl::selection\\_owner](#) ()  
*back-compatibility only: Gets the widget owning the current selection*
- static void [Fl::selection\\_owner](#) ([Fl\\_Widget](#) \*)  
*Back-compatibility only: The single-argument call can be used to move the selection to another widget or to set the owner to NULL, without changing the actual text of the selection.*
- static void [Fl::selection](#) ([Fl\\_Widget](#) &owner, const char \*, int len)  
*Changes the current selection.*
- static void [Fl::paste](#) ([Fl\\_Widget](#) &receiver)  
*Backward compatibility only: Set things up so the receiver widget will be called with an FL\_PASTE event some time in the future for the specified clipboard.*

### 29.3.1 Detailed Description

fl global copy/cut/paste functions

### 29.3.2 Function Documentation

#### 29.3.2.1 static void [Fl::copy](#) (const char \* *stuff*, int *len*, int *clipboard* = 0) [static, inherited]

Copies the data pointed to by stuff to the selection (0) or primary (1) clipboard.

The selection clipboard is used for middle-mouse pastes and for drag-and-drop selections. The primary clipboard is used for traditional copy/cut/paste operations.

Referenced by [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Text\\_Editor::kf\\_copy\(\)](#), and [Fl::selection\(\)](#).

#### 29.3.2.2 int [Fl::dnd](#) () [static, inherited]

Initiate a Drag And Drop operation.

drag and drop whatever is in the cut-copy-paste buffer

- create a selection first using: Fl::copy(const char \*stuff, int len, 0)

drag and drop whatever is in the cut-copy-paste buffer

- create a selection first using: Fl::copy(const char \*stuff, int len, 0)

The clipboard should be filled with relevant data before calling this method. FLTK will then initiate the system wide drag and drop handling. Dropped data will be marked as *text*.

References Fl::event(), FL\_RELEASE, Fl\_Widget::handle(), Fl::pushed(), and Fl::w().

Referenced by Fl\_Input::handle().

#### 29.3.2.3 void Fl::paste (Fl\_Widget & receiver) [static, inherited]

Backward compatibility only: Set things up so the receiver widget will be called with an FL\_PASTE event some time in the future for the specified clipboard.

The receiver should be prepared to be called *directly* by this, or for it to happen *later*, or possibly *not at all*. This allows the window system to take as long as necessary to retrieve the paste buffer (or even to screw up completely) without complex and error-prone synchronization code in FLTK.

See also:

[Fl::paste\(Fl\\_Widget &receiver, int clipboard\)](#)

References Fl::paste().

#### 29.3.2.4 static void Fl::paste (Fl\_Widget & receiver, int clipboard) [static, inherited]

Pastes the data from the selection (0) or primary (1) clipboard into receiver.

The selection clipboard is used for middle-mouse pastes and for drag-and-drop selections. The primary clipboard is used for traditional copy/cut/paste operations.

Referenced by Fl\_Text\_Editor::handle(), Fl\_Input::handle(), Fl\_Text\_Editor::kf\_paste(), and Fl::paste().

#### 29.3.2.5 void Fl::selection (Fl\_Widget & owner, const char \* text, int len) [static, inherited]

Changes the current selection.

The block of text is copied to an internal buffer by FLTK (be careful if doing this in response to an FL\_PASTE as this *may* be the same buffer returned by [event\\_text\(\)](#)). The [selection\\_owner\(\)](#) widget is set to the passed owner.

References Fl::copy().

#### 29.3.2.6 void Fl::selection\_owner (Fl\_Widget \* owner) [static, inherited]

Back-compatibility only: The single-argument call can be used to move the selection to another widget or to set the owner to NULL, without changing the actual text of the selection.

FL\_SELECTIONCLEAR is sent to the previous selection owner, if any.

*Copying the buffer every time the selection is changed is obviously wasteful, especially for large selections. An interface will probably be added in a future version to allow the selection to be made by a callback function. The current interface will be emulated on top of this.*

#### 29.3.2.7 static Fl\_Widget\* Fl::selection\_owner () [inline, static, inherited]

back-compatibility only: Gets the widget owning the current selection

See also:

[Fl\\_Widget\\* selection\\_owner\(Fl\\_Widget\\*\)](#)

## 29.4 Screen functions

fl global screen functions

### Functions

- static int [Fl::x\(\)](#)  
*Returns the origin of the current screen, where 0 indicates the left side of the screen.*
- static int [Fl::y\(\)](#)  
*Returns the origin of the current screen, where 0 indicates the top edge of the screen.*
- static int [Fl::w\(\)](#)  
*Returns the width of the screen in pixels.*
- static int [Fl::h\(\)](#)  
*Returns the height of the screen in pixels.*
- static int [Fl::screen\\_count\(\)](#)  
*Gets the number of available screens.*
- static void [Fl::screen\\_xywh\(int &X, int &Y, int &W, int &H\)](#)  
*Gets the bounding box of a screen that contains the mouse pointer in.*
- static void [Fl::screen\\_xywh\(int &X, int &Y, int &W, int &H, int mx, int my\)](#)  
*Gets the bounding box of a screen that contains the specified screen position mx, my.*
- static void [Fl::screen\\_xywh\(int &X, int &Y, int &W, int &H, int n\)](#)  
*Gets the screen bounding rect for the given screen.*

### 29.4.1 Detailed Description

fl global screen functions

### 29.4.2 Function Documentation

#### 29.4.2.1 static int [Fl::h\(\)](#) [static, inherited]

Returns the height of the screen in pixels.

Referenced by [Fl::event\\_inside\(\)](#), [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), [Fl\\_Tiled\\_Image::Fl\\_Tiled\\_Image\(\)](#), [Fl\\_Window::fullscreen\(\)](#), [Fl::reload\\_scheme\(\)](#), and [Fl::screen\\_xywh\(\)](#).

#### 29.4.2.2 void [Fl::screen\\_xywh\(int & X, int & Y, int & W, int & H, int n\)](#) [static, inherited]

Gets the screen bounding rect for the given screen.

**Parameters:**

→  $X, Y, W, H$  the corresponding screen bounding box  
 ←  $n$  the screen number (0 to [Fl::screen\\_count\(\)](#) - 1)

**See also:**

[void screen\\_xywh\(int &x, int &y, int &w, int &h, int mx, int my\)](#)

References [Fl::h\(\)](#), [Fl::w\(\)](#), [Fl::x\(\)](#), and [Fl::y\(\)](#).

**29.4.2.3 void Fl::screen\_xywh (int & X, int & Y, int & W, int & H, int mx, int my) [static, inherited]**

Gets the bounding box of a screen that contains the specified screen position  $mx, my$ .

**Parameters:**

→  $X, Y, W, H$  the corresponding screen bounding box  
 ←  $mx, my$  the absolute screen position

References [Fl::h\(\)](#), [Fl::w\(\)](#), [Fl::x\(\)](#), and [Fl::y\(\)](#).

**29.4.2.4 static void Fl::screen\_xywh (int & X, int & Y, int & W, int & H) [inline, static, inherited]**

Gets the bounding box of a screen that contains the mouse pointer in.

**Parameters:**

→  $X, Y, W, H$  the corresponding screen bounding box

**See also:**

[void screen\\_xywh\(int &x, int &y, int &w, int &h, int mx, int my\)](#)

Referenced by [Fl\\_Window::fullscreen\(\)](#), and [Fl\\_Window::hotspot\(\)](#).

**29.4.2.5 static int Fl::w () [static, inherited]**

Returns the width of the screen in pixels.

Referenced by [Fl::dnd\(\)](#), [Fl::event\\_inside\(\)](#), [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), [Fl\\_Tiled\\_Image::Fl\\_Tiled\\_Image\(\)](#), [Fl\\_Window::fullscreen\(\)](#), [Fl::reload\\_scheme\(\)](#), and [Fl::screen\\_xywh\(\)](#).

**29.4.2.6 static int Fl::x () [static, inherited]**

Returns the origin of the current screen, where 0 indicates the left side of the screen.

Referenced by [Fl\\_Window::fullscreen\(\)](#), and [Fl::screen\\_xywh\(\)](#).

**29.4.2.7 static int Fl::y () [static, inherited]**

Returns the origin of the current screen, where 0 indicates the top edge of the screen.

Referenced by Fl\_Window::fullscreen(), and Fl::screen\_xywh().

## 29.5 Color & Font functions

fl global color, font functions

### Functions

- static void [Fl::set\\_color \(Fl\\_Color, uchar, uchar, uchar\)](#)  
*Sets an entry in the fl\_color index table.*
- static void [Fl::set\\_color \(Fl\\_Color, unsigned\)](#)  
*Sets an entry in the fl\_color index table.*
- static unsigned [Fl::get\\_color \(Fl\\_Color\)](#)  
*Returns the RGB value(s) for the given FLTK color index.*
- static void [Fl::get\\_color \(Fl\\_Color, uchar &, uchar &, uchar &\)](#)  
*See [unsigned get\\_color\(Fl\\_Color c\)](#).*
- static void [Fl::free\\_color \(Fl\\_Color, int overlay=0\)](#)  
*Frees the specified color from the colormap, if applicable.*
- static const char \* [Fl::get\\_font \(Fl\\_Font\)](#)  
*Get the string for this face.*
- static const char \* [Fl::get\\_font\\_name \(Fl\\_Font, int \\*attributes=0\)](#)  
*Get a human-readable string describing the family of this face.*
- static int [Fl::get\\_font\\_sizes \(Fl\\_Font, int \\*&sizep\)](#)  
*Return an array of sizes in sizep.*
- static void [Fl::set\\_font \(Fl\\_Font, const char \\*\)](#)  
*Changes a face.*
- static void [Fl::set\\_font \(Fl\\_Font, Fl\\_Font\)](#)  
*Copies one face to another.*
- static [Fl\\_Font Fl::set\\_fonts \(const char \\*=0\)](#)  
*FLTK will open the display, and add every fonts on the server to the face table.*

### 29.5.1 Detailed Description

fl global color, font functions

## 29.5.2 Function Documentation

### 29.5.2.1 void Fl::free\_color (Fl\_Color *i*, int *overlay* = 0) [static, inherited]

Frees the specified color from the colormap, if applicable.

If overlay is non-zero then the color is freed from the overlay colormap.

Referenced by Fl::set\_color().

### 29.5.2.2 unsigned Fl::get\_color (Fl\_Color *i*) [static, inherited]

Returns the RGB value(s) for the given FLTK color index.

The first form returns the RGB values packed in a 32-bit unsigned integer with the red value in the upper 8 bits, the green value in the next 8 bits, and the blue value in bits 8-15. The lower 8 bits will always be 0.

The second form returns the red, green, and blue values separately in referenced variables.

Referenced by Fl::background2(), Fl\_Pixmap::color\_average(), Fl\_RGB\_Image::color\_average(), Fl\_Window::cursor(), and Fl::reload\_scheme().

### 29.5.2.3 const char \* Fl::get\_font (Fl\_Font *fnum*) [static, inherited]

Get the string for this face.

This string is different for each face. Under X this value is passed to XListFonts to get all the sizes of this face.

Referenced by Fl::set\_font().

### 29.5.2.4 const char \* Fl::get\_font\_name (Fl\_Font *fnum*, int \* *attributes* = 0) [static, inherited]

Get a human-readable string describing the family of this face.

This is useful if you are presenting a choice to the user. There is no guarantee that each face has a different name. The return value points to a static buffer that is overwritten each call.

The integer pointed to by attributes (if the pointer is not zero) is set to zero, FL\_BOLD or FL\_ITALIC or FL\_BOLD | FL\_ITALIC. To locate a "family" of fonts, search forward and back for a set with non-zero attributes, these faces along with the face with a zero attribute before them constitute a family.

References FL\_BOLD, and FL\_ITALIC.

Referenced by Fl::set\_fonts().

### 29.5.2.5 int Fl::get\_font\_sizes (Fl\_Font *fnum*, int \**& sizep*) [static, inherited]

Return an array of sizes in sizep.

The return value is the length of this array. The sizes are sorted from smallest to largest and indicate what sizes can be given to fl\_font() that will be matched exactly (fl\_font() will pick the closest size for other sizes). A zero in the first location of the array indicates a scalable font, where any size works, although the array may list sizes that work "better" than others. Warning: the returned array points at a static buffer that is overwritten each call. Under X this will open the display.

**29.5.2.6 void Fl::set\_color (Fl\_Color *i*, unsigned *c*) [static, inherited]**

Sets an entry in the fl\_color index table.

You can set it to any 8-bit RGB color. The color is not allocated until fl\_color(*i*) is used.

References Fl::free\_color().

**29.5.2.7 void Fl::set\_color (Fl\_Color *i*, uchar *red*, uchar *green*, uchar *blue*) [static, inherited]**

Sets an entry in the fl\_color index table.

You can set it to any 8-bit RGB color. The color is not allocated until fl\_color(*i*) is used.

Referenced by Fl::background(), Fl::background2(), and Fl::foreground().

**29.5.2.8 void Fl::set\_font (Fl\_Font *fnum*, Fl\_Font *from*) [static, inherited]**

Copies one face to another.

References Fl::get\_font(), and Fl::set\_font().

**29.5.2.9 void Fl::set\_font (Fl\_Font *fnum*, const char \* *name*) [static, inherited]**

Changes a face.

The string pointer is simply stored, the string is not copied, so the string must be in static memory.

References FL\_FREE\_FONT.

Referenced by Fl::set\_font(), and Fl::set\_fonts().

**29.5.2.10 Fl\_Font Fl::set\_fonts (const char \* *xstarname* = 0) [static, inherited]**

FLTK will open the display, and add every fonts on the server to the face table.

It will attempt to put "families" of faces together, so that the normal one is first, followed by bold, italic, and bold italic.

The optional argument is a string to describe the set of fonts to add. Passing NULL will select only fonts that have the ISO8859-1 character set (and are thus usable by normal text). Passing "-\*" will select all fonts with any encoding as long as they have normal X font names with dashes in them. Passing "\*" will list every font that exists (on X this may produce some strange output). Other values may be useful but are system dependent. With WIN32 NULL selects fonts with ISO8859-1 encoding and non-NUL selects all fonts.

The return value is how many faces are in the table after this is done.

References FL\_FREE\_FONT, Fl::get\_font\_name(), and Fl::set\_font().

## 29.6 Multithreading support functions

fl multithreading support functions

### Functions

- static void [Fl::lock \(\)](#)

*The [lock\(\)](#) method blocks the current thread until it can safely access FLTK widgets and data.*

- static void [Fl::unlock \(\)](#)

*The [unlock\(\)](#) method releases the lock that was set using the [lock\(\)](#) method.*

- static void [Fl::awake \(void \\*message=0\)](#)

*The [awake\(\)](#) method sends a message pointer to the main thread, causing any pending [Fl::wait\(\)](#) call to terminate so that the main thread can retrieve the message and any pending redraws can be processed.*

- static int [Fl::awake \(Fl\\_Awake\\_Handler cb, void \\*message=0\)](#)

*See [void awake\(void\\* message=0\)](#).*

- static void \* [Fl::thread\\_message \(\)](#)

*The [thread\\_message\(\)](#) method returns the last message that was sent from a child by the [awake\(\)](#) method.*

### 29.6.1 Detailed Description

fl multithreading support functions

### 29.6.2 Function Documentation

#### 29.6.2.1 int Fl::awake (Fl\_Awake\_Handler *cb*, void \* *message* = 0) [static, inherited]

See [void awake\(void\\* message=0\)](#).

Let the main thread know an update is pending and have it call a specific function See [void awake\(void\\* message=0\)](#).

References [Fl::add\\_awake\\_handler\(\)](#), and [Fl::awake\(\)](#).

#### 29.6.2.2 void Fl::awake (void \* *msg* = 0) [static, inherited]

The [awake\(\)](#) method sends a message pointer to the main thread, causing any pending [Fl::wait\(\)](#) call to terminate so that the main thread can retrieve the message and any pending redraws can be processed.

Multiple calls to [Fl::awake\(\)](#) will queue multiple pointers for the main thread to process, up to a system-defined (typically several thousand) depth. The default message handler saves the last message which can be accessed using the [Fl::thread\\_message\(\)](#) function.

The second form of [awake\(\)](#) registers a function that will be called by the main thread during the next message handling cycle. [awake\(\)](#) will return 0 if the callback function was registered, and -1 if registration failed. Over a thousand awake callbacks can be registered simultaneously.

See also: multithreading.

Referenced by Fl::awake().

#### 29.6.2.3 void Fl::lock () [static, inherited]

The [lock\(\)](#) method blocks the current thread until it can safely access FLTK widgets and data.

Child threads should call this method prior to updating any widgets or accessing data. The main thread must call [lock\(\)](#) to initialize the threading support in FLTK.

Child threads must call [unlock\(\)](#) when they are done accessing FLTK.

When the [wait\(\)](#) method is waiting for input or timeouts, child threads are given access to FLTK. Similarly, when the main thread needs to do processing, it will wait until all child threads have called [unlock\(\)](#) before processing additional data.

See also: multithreading

#### 29.6.2.4 static void\* Fl::thread\_message () [static, inherited]

The [thread\\_message\(\)](#) method returns the last message that was sent from a child by the [awake\(\)](#) method.

See also: multithreading

#### 29.6.2.5 void Fl::unlock () [static, inherited]

The [unlock\(\)](#) method releases the lock that was set using the [lock\(\)](#) method.

Child threads should call this method as soon as they are finished accessing FLTK.

See also: multithreading

## 29.7 Safe widget deletion support functions

fl multithreading support functions

### Functions

- static void [Fl::delete\\_widget\(Fl\\_Widget \\*w\)](#)  
*Schedules a widget for deletion at the next call to the event loop.*
- static void [Fl::do\\_widget\\_deletion\(\)](#)  
*Deletes widgets previously scheduled for deletion.*
- static void [Fl::watch\\_widget\\_pointer\(Fl\\_Widget \\*&&w\)](#)  
*Adds a widget pointer to the watch list.*
- static void [Fl::release\\_widget\\_pointer\(Fl\\_Widget \\*&&w\)](#)  
*Releases a widget pointer to the watch list.*
- static void [Fl::clear\\_widget\\_pointer\(Fl\\_Widget const \\*w\)](#)  
*Clears a widget pointer in the watch list.*

### 29.7.1 Detailed Description

fl multithreading support functions

### 29.7.2 Function Documentation

#### 29.7.2.1 void [Fl::delete\\_widget\(Fl\\_Widget \\* wi\)](#) [static, inherited]

Schedules a widget for deletion at the next call to the event loop.

Use this method to delete a widget inside a callback function. To avoid early deletion of widgets, this function should be called toward the end of a callback and only after any call to the event loop ([Fl::wait\(\)](#), [Fl::flush\(\)](#), [fl\\_ask\(\)](#), etc.).

When deleting groups or windows, you must only delete the group or window widget and not the individual child widgets.

#### 29.7.2.2 void [Fl::do\\_widget\\_deletion\(\)](#) [static, inherited]

Deletes widgets previously scheduled for deletion.

See [void Fl::delete\\_widget\(Fl\\_Widget \\*wi\)](#)

Referenced by [Fl::wait\(\)](#).

#### 29.7.2.3 void [Fl::watch\\_widget\\_pointer\(Fl\\_Widget \\*& w\)](#) [static, inherited]

Adds a widget pointer to the watch list.

**Todo**

explain the role of the watch list, it may be related to invalid widget deletion crash fixes...

Referenced by Fl\_Menu\_Button::popup().

## 29.8 Cairo support functions and classes

### Classes

- class [Fl\\_Cairo\\_State](#)  
*Contains all the necessary info on the current cairo context.*
- class [Fl\\_Cairo\\_Window](#)  
*This defines a pre-configured cairo fltk window.*

### Functions

- static cairo\_t \* [Fl::cairo\\_make\\_current\(Fl\\_Window \\*w\)](#)  
*Provides a corresponding cairo context for window wi.*
- static void [Fl::cairo\\_autolink\\_context\(bool alink\)](#)  
*when HAVE\_CAIRO is defined and [cairo\\_autolink\\_context\(\)](#) is true, any current window dc is linked to a current context.*
- static bool [Fl::cairo\\_autolink\\_context\(\)](#)  
*Gets the current autolink mode for cairo support.,*
- static cairo\_t \* [Fl::cairo\\_cc\(\)](#)  
*Gets the current cairo context linked with a fltk window.*
- static void [Fl::cairo\\_cc\(cairo\\_t \\*c, bool own=false\)](#)  
*Sets the cairo current context to c, set own to true if you want fltk to handle this cc deletion.*

### 29.8.1 Function Documentation

#### 29.8.1.1 static bool [Fl::cairo\\_autolink\\_context\(\)](#) [inline, static, inherited]

Gets the current autolink mode for cairo support.,

##### Return values:

- false* if no cairo context autolink is made for each window.  
*true* if any fltk window is attached a cairo context when it is current.

##### See also:

[void cairo\\_autolink\\_context\(bool alink\)](#)

##### Note:

Only available when configure has the –enable-cairo option

Referenced by [Fl\\_Cairo\\_Window::draw\(\)](#), and [Fl\\_Window::hide\(\)](#).

**29.8.1.2 static void Fl::cairo\_autolink\_context (bool *alink*) [inline, static, inherited]**

when HAVE\_CAIRO is defined and [cairo\\_autolink\\_context\(\)](#) is true, any current window dc is linked to a current context.

this is not the default because, it may not be necessary to add cairo support to all fltk supported windows. When you wish to associate a cairo context in this mode, you need to call explicitly in your draw() overridden method, [FL::cairo\\_make\\_current\(Fl\\_Window\\*\)](#). This will create a cairo context but only for this Window. Still in custom cairo application it is possible to handle completely this process automatically by setting *alink* to true. In this last case, you don't need anymore to call [Fl::cairo\\_make\\_current\(\)](#) you can use [Fl::cairo\\_cc\(\)](#) to get the current cairo context anytime.

**Note:**

Only available when configure has the –enable-cairo option

**29.8.1.3 static void Fl::cairo\_cc (cairo\_t \* *c*, bool *own* = false) [inline, static, inherited]**

Sets the cairo current context to *c*, set *own* to true if you want fltk to handle this cc deletion.

**Note:**

Only available when configure has the –enable-cairo option

**29.8.1.4 static cairo\_t\* Fl::cairo\_cc () [inline, static, inherited]**

Gets the current cairo context linked with a fltk window.

Referenced by [Fl::cairo\\_make\\_current\(\)](#), and [Fl\\_Cairo\\_Window::draw\(\)](#).

**29.8.1.5 cairo\_t \* Fl::cairo\_make\_current (Fl\_Window \* *wi*) [static, inherited]**

Provides a corresponding cairo context for window *wi*.

This is needed in a draw() override if [Fl::cairo\\_autolink\\_context\(\)](#) returns false, which is the default. The [cairo\\_context\(\)](#) does not need to be freed as it is freed every time a new cairo context is created. When the program terminates, a call to [Fl::cairo\\_make\\_current\(0\)](#) will destroy any residual context.

**Note:**

A new cairo context is not always re-created when this method is used. In particular, if the current graphical context and the current window didn't change between two calls, the previous gc is internally kept, thus optimizing the drawing performances. Also, after this call, [Fl::cairo\\_gc\(\)](#) is adequately updated with this cairo context.

Only available when configure has the –enable-cairo option

**Returns:**

the valid cairo\_t\* cairo context associated to this window.

References [Fl::cairo\\_cc\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::w\(\)](#), and [Fl\\_Cairo\\_State::window\(\)](#).

Referenced by [Fl\\_Window::draw\(\)](#), [Fl\\_Cairo\\_Window::draw\(\)](#), [Fl\\_Menu\\_Window::flush\(\)](#), and [Fl\\_Window::hide\(\)](#).

## 29.9 Common Dialogs classes and functions

### Classes

- class [Fl\\_Color\\_Chooser](#)

*The [Fl\\_Color\\_Chooser](#) widget provides a standard RGB color chooser.*

- class [Fl\\_File\\_Chooser](#)

*The [Fl\\_File\\_Chooser](#) widget displays a standard file selection dialog that supports various selection modes.*

### Functions

- void [fl\\_beep](#) (int type)

*Emits a system beep message.*

- void [fl\\_message](#) (const char \*fmt,...)

*Shows an information message dialog box.*

- void [fl\\_alert](#) (const char \*fmt,...)

*Shows an alert message dialog box.*

- int [fl\\_ask](#) (const char \*fmt,...)

*Shows a dialog displaying the fmt message, this dialog features 2 yes/no buttons.*

- int [fl\\_choice](#) (const char \*fmt, const char \*b0, const char \*b1, const char \*b2,...)

*Shows a dialog displaying the fmt message, this dialog features up to 3 customizable choice buttons.*

- [Fl\\_Widget](#) \* [fl\\_message\\_icon](#) ()

*Gets the [Fl\\_Box](#) icon container of the current default dialog used in many common dialogs like [fl\\_message\(\)](#), [fl\\_alert\(\)](#), [fl\\_ask\(\)](#), [fl\\_choice\(\)](#), [fl\\_input\(\)](#), [fl\\_password\(\)](#).*

- const char \* [fl\\_input](#) (const char \*fmt, const char \*defstr,...)

*Shows an input dialog displaying the fmt message.*

- const char \* [fl\\_password](#) (const char \*fmt, const char \*defstr,...)

*Shows an input dialog displaying the fmt message, like [fl\\_input](#) except the input text is not shown, '\*' characters are displayed instead.*

- void [fl\\_file\\_chooser\\_callback](#) (void(\*cb)(const char \*))

- void [fl\\_file\\_chooser\\_ok\\_label](#) (const char \*l)

- int [Fl\\_Color\\_Chooser::fl\\_color\\_chooser](#) (const char \*name, double &r, double &g, double &b)

*Pops up a window to let the user pick an arbitrary RGB color.*

- int [Fl\\_Color\\_Chooser::fl\\_color\\_chooser](#) (const char \*name, uchar &r, uchar &g, uchar &b)

*Pops up a window to let the user pick an arbitrary RGB color.*

- void [Fl\\_File\\_Chooser::fl\\_file\\_chooser\\_callback](#) (void(\*cb)(const char \*))

- void [Fl\\_File\\_Chooser::fl\\_file\\_chooser\\_ok\\_label](#) (const char \*l)

- char \* [Fl\\_File\\_Chooser::fl\\_file\\_chooser](#) (const char \*message, const char \*pat, const char \*fname, int relative)

- char \* [Fl\\_File\\_Chooser::fl\\_dir\\_chooser](#) (const char \*message, const char \*fname, int relative)

## Variables

- static void(\* **Fl::warning** )(const char \*,...) = ::warning  
*FLTK calls this to print a warning message.*
- static void(\* **Fl::error** )(const char \*,...) = ::error  
*FLTK calls this to print a normal error message.*
- static void(\* **Fl::fatal** )(const char \*,...) = ::fatal  
*FLTK calls this to print a fatal error message.*
- const char \* **fl\_no** = "No"  
*string pointer used in common dialogs, you can change it to a foreign language*
- const char \* **fl\_yes** = "Yes"  
*string pointer used in common dialogs, you can change it to a foreign language*
- const char \* **fl\_ok** = "OK"  
*string pointer used in common dialogs, you can change it to a foreign language*
- const char \* **fl\_cancel** = "Cancel"  
*string pointer used in common dialogs, you can change it to a foreign language*
- const char \* **fl\_close** = "Close"  
*string pointer used in common dialogs, you can change it to a foreign language*

### 29.9.1 Function Documentation

#### 29.9.1.1 void fl\_alert (const char \**fmt*, ...)

Shows an alert message dialog box.

**Parameters:**

← *fmt* can be used as an sprintf-like format and variables for the message text

References fl\_beep().

#### 29.9.1.2 int fl\_ask (const char \**fmt*, ...)

Shows a dialog displaying the *fmt* message, this dialog features 2 yes/no buttons.

**Parameters:**

← *fmt* can be used as an sprintf-like format and variables for the message text

**Return values:**

**0** if the no button is selected

**1** if yes is selected

References fl\_beep().

**29.9.1.3 int fl\_choice (const char \**fmt*, const char \**b0*, const char \**b1*, const char \**b2*, ...)**

Shows a dialog displaying the *fmt* message, this dialog features up to 3 customizable choice buttons.

**Parameters:**

- ← *fmt* can be used as an sprintf-like format and variables for the message text
- ← *b0* text label of button 0
- ← *b1* text label of button 1
- ← *b2* text label of button 2

**Return values:**

- 0** if the first button with *b0* text is selected
- 1** if the second button with *b1* text is selected
- 2** if the third button with *b2* text is selected

References fl\_beep().

**29.9.1.4 int fl\_color\_chooser (const char \**name*, uchar &*r*, uchar &*g*, uchar &*b*) [related, inherited]**

Pops up a window to let the user pick an arbitrary RGB color.

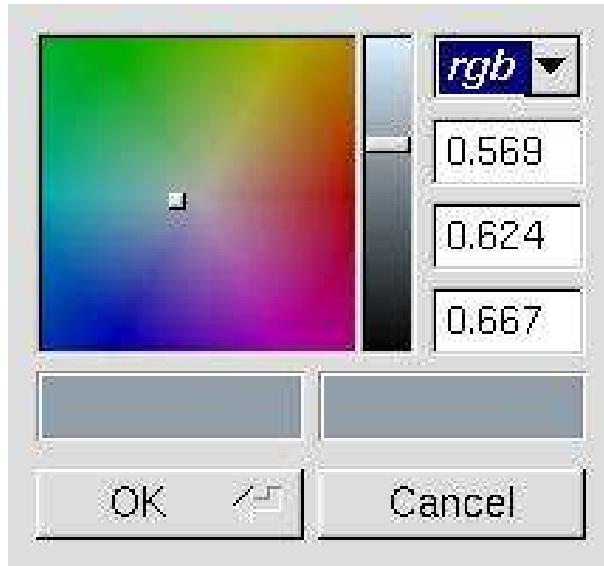


Figure 29.1: fl\_color\_chooser

**Parameters:**

- ← *name* title label for the window
- ↔ *r,g,b* color components in the range 0 to 255.

**Return values:**

- 1** if user confirms the selection

**0** if user cancels the dialog

References Fl\_Color\_Chooser::fl\_color\_chooser().

#### 29.9.1.5 int fl\_color\_chooser (const char \* *name*, double & *r*, double & *g*, double & *b*) [related, inherited]

Pops up a window to let the user pick an arbitrary RGB color.

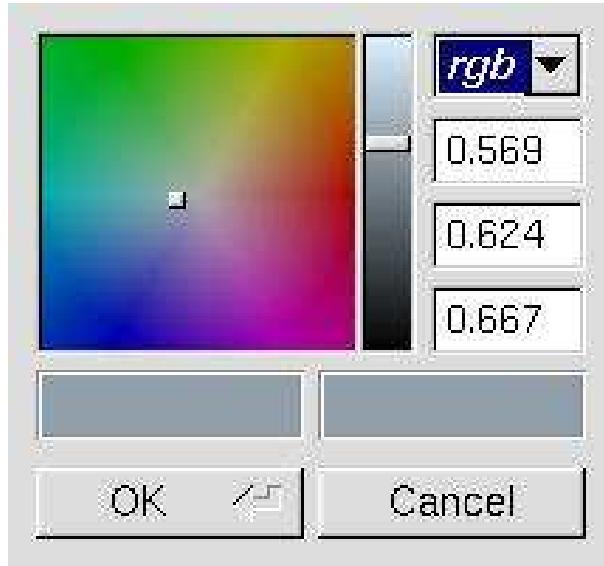


Figure 29.2: fl\_color\_chooser

#### Parameters:

← *name* title label for the window  
↔ *r,g,b* color components in the range 0.0 to 1.0.

#### Return values:

**1** if user confirms the selection  
**0** if user cancels the dialog

References Fl\_Color\_Chooser::b(), Fl\_Widget::callback(), Fl\_Group::end(), Fl\_Color\_Chooser::g(), Fl\_Window::hotspot(), Fl\_Color\_Chooser::r(), Fl::readqueue(), Fl\_Group::resizable(), Fl\_Color\_Chooser::rgb(), Fl\_Window::set\_modal(), Fl\_Window::show(), Fl\_Window::shown(), and Fl::wait().

Referenced by Fl\_Color\_Chooser::fl\_color\_chooser().

#### 29.9.1.6 char \* fl\_dir\_chooser (const char \* *message*, const char \* *fname*, int *relative*) [related, inherited]

Shows a file chooser dialog and get a directory.

#### Parameters:

← *message* title bar text

$\leftarrow \text{fname}$  initial/default directory name  
 $\leftarrow \text{relative}$  0 for absolute path return, relative otherwise

**Returns:**

the directory path string chosen by the user or NULL if user cancels

References `Fl_File_Chooser::callback()`, `Fl_File_Chooser::filter()`, `Fl_File_Chooser::label()`, `Fl_File_Chooser::show()`, `Fl_File_Chooser::shown()`, `Fl_File_Chooser::type()`, `Fl_File_Chooser::value()`, and `Fl::wait()`.

#### 29.9.1.7 `char * fl_file_chooser (const char * message, const char * pat, const char * fname, int relative)` [related, inherited]

Shows a file chooser dialog and get a filename.

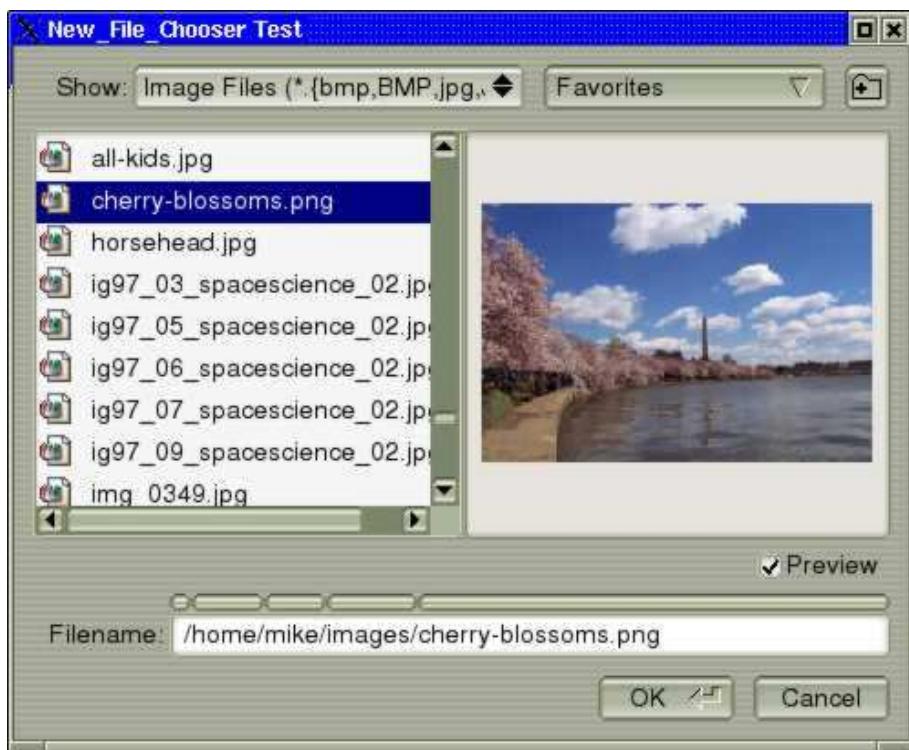


Figure 29.3: Fl\_File\_Chooser

**Parameters:**

$\leftarrow \text{message}$  text in title bar  
 $\leftarrow \text{pat}$  filename pattern filter  
 $\leftarrow \text{fname}$  initial/default filename selection  
 $\leftarrow \text{relative}$  0 for absolute path name, relative path name otherwise

**Returns:**

the user selected filename, in absolute or relative format or NULL if user cancels

References Fl\_File\_Chooser::callback(), Fl\_File\_Chooser::directory(), Fl\_File\_Chooser::filter(), Fl\_File\_Chooser::label(), Fl\_File\_Chooser::ok\_label(), Fl\_File\_Chooser::show(), Fl\_File\_Chooser::shown(), Fl\_File\_Chooser::type(), Fl\_File\_Chooser::value(), and Fl::wait().

#### **29.9.1.8 void fl\_file\_chooser\_callback (void(\*)(const char \*) *cb*) [related, inherited]**

Set the file chooser callback

#### **29.9.1.9 void fl\_file\_chooser\_callback (void(\*)(const char \*) *cb*)**

Set the file chooser callback

#### **29.9.1.10 void fl\_file\_chooser\_ok\_label (const char \* *l*) [related, inherited]**

Set the "OK" button label

#### **29.9.1.11 void fl\_file\_chooser\_ok\_label (const char \* *l*)**

Set the "OK" button label

References fl\_ok.

#### **29.9.1.12 const char\* fl\_input (const char \* *fmt*, const char \* *defstr*, ...)**

Shows an input dialog displaying the *fmt* message.

##### **Parameters:**

← *fmt* can be used as an sprintf-like format and variables for the message text

← *defstr* defines the default returned string if no text is entered

##### **Returns:**

the user string input if OK was pushed, NULL if Cancel was pushed

References fl\_beep().

Referenced by Fl\_File\_Chooser::rescan\_keep\_filename().

#### **29.9.1.13 void fl\_message (const char \* *fmt*, ...)**

Shows an information message dialog box.

##### **Parameters:**

← *fmt* can be used as an sprintf-like format and variables for the message text

References fl\_beep().

**29.9.1.14 const char\* fl\_password (const char \*fmt, const char \*defstr, ...)**

Shows an input dialog displaying the *fmt* message, like fl\_input except the input text is not shown, '\*' characters are displayed instead.

**Parameters:**

- ← *fmt* can be used as an sprintf-like format and variables for the message text
- ← *defstr* defines the default returned string if no text is entered

**Returns:**

the user string input if OK was pushed, NULL if Cancel was pushed

References fl\_beep().

**29.9.2 Variable Documentation****29.9.2.1 void(\* Fl::error)(const char \*format,...) (const char \*, ...) = ::error [static, inherited]**

FLTK calls this to print a normal error message.

You can override the behavior by setting the function pointer to your own routine.

**Fl::error** means there is a recoverable error such as the inability to read an image file. The default implementation shows an error dialog to stderr and returns.

Referenced by Fl::args(), Fl\_Text\_Display::draw\_vline(), Fl\_GIF\_Image::Fl\_GIF\_Image(), Fl\_PNM\_Image::Fl\_PNM\_Image(), fl\_pop\_matrix(), fl\_push\_matrix(), Fl\_Text\_Buffer::insert\_column(), Fl\_File\_Icon::load\_fti(), Fl\_Text\_Buffer::overlay\_rectangular(), Fl\_Text\_Display::position\_to\_line(), Fl\_Text\_Buffer::remove\_modify\_callback(), Fl\_Text\_Buffer::remove\_predelete\_callback(), Fl\_Text\_Buffer::replace\_rectangular(), and Fl\_Gl\_Window::show().

**29.9.2.2 void(\* Fl::fatal)(const char \*format,...) (const char \*, ...) = ::fatal [static, inherited]**

FLTK calls this to print a fatal error message.

You can override the behavior by setting the function pointer to your own routine.

**Fl::fatal** must not return, as FLTK is in an unusable state, however your version may be able to use longjmp or an exception to continue, as long as it does not call FLTK again. The default implementation shows a fatal dialog box and exits with status 1.

Referenced by Fl\_Gl\_Window::draw().

**29.9.2.3 void(\* Fl::warning)(const char \*format,...) (const char \*, ...) = ::warning [static, inherited]**

FLTK calls this to print a warning message.

You can override the behavior by setting the function pointer to your own routine.

**Fl::warning** means that there was a recoverable problem, the display may be messed up but the user can probably keep working - all X protocol errors call this, for example.

Referenced by Fl\_GIF\_Image::Fl\_GIF\_Image(), Fl\_PNG\_Image::Fl\_PNG\_Image(), fl\_pop\_clip(), fl\_push\_clip(), fl\_push\_no\_clip(), and Fl\_File\_Icon::load().

# Chapter 30

## Class Documentation

### 30.1 Fl Class Reference

The `Fl` is the FLTK global (static) containing state information and global methods for the current application.

```
#include <Fl.h>
```

#### Static Public Member Functions

- static void `damage` (int d)  
*If true then `flush()` will do something.*
- static int `add_awake_handler_` (Fl\_Awake\_Handler, void \*)  
*Adds an awake handler for use in `awake()`.*
- static int `get_awake_handler_` (Fl\_Awake\_Handler &, void \* &)  
*Gets the last stored awake handler for use in `awake()`.*
- static double `version` ()  
*Returns the compiled-in value of the `FL_VERSION` constant.*
- static int `arg` (int, char \*\*, int &)  
*Consume a single switch from argv, starting at word i.*
- static int `args` (int, char \*\*, int &, int(\*)(int, char \*\*, int &)=0)  
*Consume all switches from argv.*
- static void `args` (int, char \*\*)  
*See `Fl::args(int argc, char **argv, int& i, int (*cb)(int,char**,int&))`.*
- static void `display` (const char \*)  
*Sets the X display to use for all windows.*
- static int `visual` (int)

Selects a visual so that your graphics are drawn correctly.

- static int **gl\_visual** (int, int \*alist=0)

*This does the same thing as [Fl::visual\(int\)](#) but also requires OpenGL drawing to work.*

- static void **own\_colormap** ()

*Makes FLTK use its own colormap.*

- static void **get\_system\_colors** ()

*Read the user preference colors from the system and use them to call [Fl::foreground\(\)](#), [Fl::background\(\)](#), and [Fl::background2\(\)](#).*

- static void **foreground** (uchar, uchar, uchar)

*Changes fl\_color(FL\_FOREGROUND\_COLOR).*

- static void **background** (uchar, uchar, uchar)

*Changes fl\_color(FL\_BACKGROUND\_COLOR) to the given color, and changes the gray ramp from 32 to 56 to black to white.*

- static void **background2** (uchar, uchar, uchar)

*Changes the alternative background color.*

- static int **scheme** (const char \*)

*Gets or sets the current widget scheme.*

- static const char \* **scheme** ()

*See void [scheme\(const char \\*name\)](#).*

- static int **reload\_scheme** ()

*Called by scheme according to scheme name.*

- static int **scrollbar\_size** ()

*Gets the default scrollbar size that is used by the [Fl\\_Browser\\_](#), [Fl\\_Help\\_View](#), [Fl\\_Scroll](#), and [Fl\\_Text\\_Display](#) widgets.*

- static void **scrollbar\_size** (int W)

*Sets the default scrollbar size that is used by the [Fl\\_Browser\\_](#), [Fl\\_Help\\_View](#), [Fl\\_Scroll](#), and [Fl\\_Text\\_Display](#) widgets.*

- static int **wait** ()

*Waits until "something happens" and then returns.*

- static double **wait** (double time)

*See int [wait\(\)](#).*

- static int **check** ()

*Same as [Fl::wait\(0\)](#).*

- static int **ready** ()

*This is similar to [Fl::check\(\)](#) except this does not call [Fl::flush\(\)](#) or any callbacks, which is useful if your program is in a state where such callbacks are illegal.*

- static int **run** ()

*As long as any windows are displayed this calls [Fl::wait\(\)](#) repeatedly.*

- static **Fl\_Widget \* readqueue** ()

*All Fl\_Widgets that don't have a callback defined use a default callback that puts a pointer to the widget in this queue, and this method reads the oldest widget out of this queue.*

- static void **add\_timeout** (double t, **Fl\_Timeout\_Handler**, void \*=0)

*Adds a one-shot timeout callback.*

- static void **repeat\_timeout** (double t, **Fl\_Timeout\_Handler**, void \*=0)

*This method repeats a timeout callback from the expiration of the previous timeout, allowing for more accurate timing.*

- static int **has\_timeout** (**Fl\_Timeout\_Handler**, void \*=0)

*Returns true if the timeout exists and has not been called yet.*

- static void **remove\_timeout** (**Fl\_Timeout\_Handler**, void \*=0)

*Removes a timeout callback.*

- static void **add\_check** (**Fl\_Timeout\_Handler**, void \*=0)

*FLTK will call this callback just before it flushes the display and waits for events.*

- static int **has\_check** (**Fl\_Timeout\_Handler**, void \*=0)

*Returns 1 if the check exists and has not been called yet, 0 otherwise.*

- static void **remove\_check** (**Fl\_Timeout\_Handler**, void \*=0)

*Removes a check callback.*

- static void **add\_fd** (int fd, int when, void(\*cb)(int, void \*), void \*=0)

*Add file descriptor fd to listen to.*

- static void **add\_fd** (int fd, void(\*cb)(int, void \*), void \*=0)

*See void add\_fd(int fd, int when, void (\*cb)(int, void \*), void\* =0).*

- static void **remove\_fd** (int, int when)

*Removes a file descriptor handler.*

- static void **remove\_fd** (int)

*Removes a file descriptor handler.*

- static void **add\_idle** (void(\*cb)(void \*), void \*data=0)

*Adds a callback function that is called every time by [Fl::wait\(\)](#) and also makes it act as though the timeout is zero (this makes [Fl::wait\(\)](#) return immediately, so if it is in a loop it is called repeatedly, and thus the idle function is called repeatedly).*

- static int **has\_idle** (void(\*cb)(void \*), void \*data=0)

*Returns true if the specified idle callback is currently installed.*

- static void `remove_idle` (void(\*cb)(void \*), void \*data=0)  
*Removes the specified idle callback, if it is installed.*
- static int `damage` ()  
*If true then `flush()` will do something.*
- static void `redraw` ()  
*Redraws all widgets.*
- static void `flush` ()  
*Causes all the windows that need it to be redrawn and graphics forced out through the pipes.*
- static `Fl_Window` \* `first_window` ()  
*Returns the first top-level window in the list of `shown()` windows.*
- static void `first_window` (`Fl_Window` \*)  
*See `Fl_Window*` `first_window()`.*
- static `Fl_Window` \* `next_window` (const `Fl_Window` \*)  
*Returns the next top-level window in the list of `shown()` windows.*
- static `Fl_Window` \* `modal` ()  
*Returns the top-most `modal()` window currently shown.*
- static `Fl_Window` \* `grab` ()  
*This is used when pop-up menu systems are active.*
- static void `grab` (`Fl_Window` \*)  
*Selects the window to grab.*
- static int `event` ()  
*Returns the last event that was processed.*
- static int `event_x` ()  
*Returns the mouse position of the event relative to the `Fl_Window` it was passed to.*
- static int `event_y` ()  
*Returns the mouse position of the event relative to the `Fl_Window` it was passed to.*
- static int `event_x_root` ()  
*Returns the mouse position on the screen of the event.*
- static int `event_y_root` ()  
*Returns the mouse position on the screen of the event.*
- static int `event_dx` ()  
*Returns the current horizontal mouse scrolling associated with the `FL_MOUSEWHEEL` event.*
- static int `event_dy` ()  
*Returns the current vertical mouse scrolling assoiated with the `FL_MOUSEWHEEL` event.*

- static void [get\\_mouse](#) (int &, int &)  
*Return where the mouse is on the screen by doing a round-trip query to the server.*
- static int [event\\_clicks](#) ()  
*Returns non zero if we had a double click event.*
- static void [event\\_clicks](#) (int i)  
*Manually sets the number returned by [Fl::event\\_clicks\(\)](#).*
- static int [event\\_is\\_click](#) ()  
*The first form returns non-zero if the mouse has not moved far enough and not enough time has passed since the last FL\_PUSH or FL\_KEYBOARD event for it to be considered a "drag" rather than a "click".*
- static void [event\\_is\\_click](#) (int i)  
*Only i=0 works! See int [event\\_is\\_click\(\)](#).*
- static int [event\\_button](#) ()  
*Gets which particular mouse button caused the current event.*
- static int [event\\_state](#) ()  
*This is a bitfield of what shift states were on and what mouse buttons were held down during the most recent event.*
- static int [event\\_state](#) (int i)  
*See int [event\\_state\(\)](#).*
- static int [event\\_key](#) ()  
*Gets which key on the keyboard was last pushed.*
- static int [event\\_original\\_key](#) ()  
*If NumLock is deactivated, FLTK translates events from the numeric keypad into the corresponding arrow key events.*
- static int [event\\_key](#) (int key)  
*Returns true if the given key was held down (or pressed) during the last event.*
- static int [get\\_key](#) (int key)  
*Returns true if the given key is held down now.*
- static const char \* [event\\_text](#) ()  
*Returns the text associated with the current FL\_PASTE or FL\_DND\_RELEASE event.*
- static int [event\\_length](#) ()  
*Returns the length of the text in [Fl::event\\_text\(\)](#).*
- static int [compose](#) (int &del)  
*Any text editing widget should call this for each FL\_KEYBOARD event.*
- static void [compose\\_reset](#) ()

If the user moves the cursor, be sure to call [Fl::compose\\_reset\(\)](#).

- static int [event\\_inside](#) (int, int, int, int)  
*Returns whether or not the mouse event is inside the given rectangle.*
- static int [event\\_inside](#) (const [Fl\\_Widget](#) \*)  
*Returns whether or not the mouse event is inside the given widget.*
- static int [test\\_shortcut](#) (int)  
*Test the current event, which must be an FL\_KEYBOARD or FL\_SHORTCUT, against a shortcut value (described in [Fl\\_Button](#)).*
- static int [handle](#) (int, [Fl\\_Window](#) \*)  
*Sends the event to a window for processing.*
- static [Fl\\_Widget](#) \* [belowmouse](#) ()  
*Gets the widget that is below the mouse.*
- static void [belowmouse](#) ([Fl\\_Widget](#) \*)  
*Sets the widget that is below the mouse.*
- static [Fl\\_Widget](#) \* [pushed](#) ()  
*Sets the widget that is being pushed.*
- static void [pushed](#) ([Fl\\_Widget](#) \*)  
*Sets the widget that is being pushed.*
- static [Fl\\_Widget](#) \* [focus](#) ()  
*Gets the current [Fl::focus\(\)](#) widget.*
- static void [focus](#) ([Fl\\_Widget](#) \*)  
*Sets the widget that will receive FL\_KEYBOARD events.*
- static void [add\\_handler](#) (int(\*h)(int))  
*Install a function to parse unrecognized events.*
- static void [remove\\_handler](#) (int(\*h)(int))  
*Removes a previously added event handler.*
- static void [copy](#) (const char \*stuff, int len, int clipboard=0)  
*Copies the data pointed to by stuff to the selection (0) or primary (1) clipboard.*
- static void [paste](#) ([Fl\\_Widget](#) &receiver, int clipboard)  
*Pastes the data from the selection (0) or primary (1) clipboard into receiver.*
- static int [dnd](#) ()  
*Initiate a Drag And Drop operation.*
- static [Fl\\_Widget](#) \* [selection\\_owner](#) ()  
*back-compatibility only: Gets the widget owning the current selection*

- static void [selection\\_owner \(Fl\\_Widget \\*\)](#)  
*Back-compatibility only: The single-argument call can be used to move the selection to another widget or to set the owner to NULL, without changing the actual text of the selection.*
- static void [selection \(Fl\\_Widget &owner, const char \\*, int len\)](#)  
*Changes the current selection.*
- static void [paste \(Fl\\_Widget &receiver\)](#)  
*Backward compatibility only: Set things up so the receiver widget will be called with an FL\_PASTE event some time in the future for the specified clipboard.*
- static int [x \(\)](#)  
*Returns the origin of the current screen, where 0 indicates the left side of the screen.*
- static int [y \(\)](#)  
*Returns the origin of the current screen, where 0 indicates the top edge of the screen.*
- static int [w \(\)](#)  
*Returns the width of the screen in pixels.*
- static int [h \(\)](#)  
*Returns the height of the screen in pixels.*
- static int [screen\\_count \(\)](#)  
*Gets the number of available screens.*
- static void [screen\\_xywh \(int &X, int &Y, int &W, int &H\)](#)  
*Gets the bounding box of a screen that contains the mouse pointer in.*
- static void [screen\\_xywh \(int &X, int &Y, int &W, int &H, int mx, int my\)](#)  
*Gets the bounding box of a screen that contains the specified screen position mx, my.*
- static void [screen\\_xywh \(int &X, int &Y, int &W, int &H, int n\)](#)  
*Gets the screen bounding rect for the given screen.*
- static void [set\\_color \(Fl\\_Color, uchar, uchar, uchar\)](#)  
*Sets an entry in the fl\_color index table.*
- static void [set\\_color \(Fl\\_Color, unsigned\)](#)  
*Sets an entry in the fl\_color index table.*
- static unsigned [get\\_color \(Fl\\_Color\)](#)  
*Returns the RGB value(s) for the given FLTK color index.*
- static void [get\\_color \(Fl\\_Color, uchar &, uchar &, uchar &\)](#)  
*See [unsigned get\\_color\(Fl\\_Color c\)](#).*
- static void [free\\_color \(Fl\\_Color, int overlay=0\)](#)  
*Frees the specified color from the colormap, if applicable.*

- static const char \* [get\\_font \(Fl\\_Font\)](#)  
*Get the string for this face.*
- static const char \* [get\\_font\\_name \(Fl\\_Font, int \\*attributes=0\)](#)  
*Get a human-readable string describing the family of this face.*
- static int [get\\_font\\_sizes \(Fl\\_Font, int \\*&sizep\)](#)  
*Return an array of sizes in sizep.*
- static void [set\\_font \(Fl\\_Font, const char \\*\)](#)  
*Changes a face.*
- static void [set\\_font \(Fl\\_Font, Fl\\_Font\)](#)  
*Copies one face to another.*
- static Fl\_Font [set\\_fonts \(const char \\*=0\)](#)  
*FLTK will open the display, and add every fonts on the server to the face table.*
- static void [set\\_labeltype \(Fl\\_Labeltype, Fl\\_Label\\_Draw\\_F \\*, Fl\\_Label\\_Measure\\_F \\*\)](#)  
*Sets the functions to call to draw and measure a specific labeltype.*
- static void [set\\_labeltype \(Fl\\_Labeltype, Fl\\_Labeltype from\)](#)  
*Sets the functions to call to draw and measure a specific labeltype.*
- static Fl\_Box\_Draw\_F \* [get\\_boxtype \(Fl\\_Boxtype\)](#)  
*Gets the current box drawing function for the specified box type.*
- static void [set\\_boxtype \(Fl\\_Boxtype, Fl\\_Box\\_Draw\\_F \\*, uchar, uchar, uchar, uchar\)](#)  
*Sets the function to call to draw a specific boxtype.*
- static void [set\\_boxtype \(Fl\\_Boxtype, Fl\\_Boxtype from\)](#)  
*Copies the from boxtype.*
- static int [box\\_dx \(Fl\\_Boxtype\)](#)  
*Returns the X offset for the given boxtype.*
- static int [box\\_dy \(Fl\\_Boxtype\)](#)  
*Returns the Y offset for the given boxtype.*
- static int [box\\_dw \(Fl\\_Boxtype\)](#)  
*Returns the width offset for the given boxtype.*
- static int [box\\_dh \(Fl\\_Boxtype\)](#)  
*Returns the height offset for the given boxtype.*
- static int [draw\\_box\\_active \(\)](#)  
*Determines if the current draw box is active or inactive.*
- static void [set\\_abort \(void\(\\*f\)\(const char \\*,...\)\)](#)

*For back compatibility, sets the void [Fl::fatal](#) handler callback.*

- static void [default\\_atclose](#) ([Fl\\_Window](#) \*, void \*)  
*Default callback for window widgets.*
- static void [set\\_atclose](#) (void(\*f)([Fl\\_Window](#) \*, void \*))  
*For back compatibility, sets the [Fl::atclose](#) handler callback.*
- static int [event\\_shift](#) ()  
*Returns non-zero if the Shift key is pressed.*
- static int [event\\_ctrl](#) ()  
*Returns non-zero if the Control key is pressed.*
- static int [event\\_alt](#) ()  
*Returns non-zero if the Alt key is pressed.*
- static int [event\\_buttons](#) ()  
*Returns the mouse buttons state bits; if non-zero, then at least one button is pressed now.*
- static int [event\\_button1](#) ()  
*Returns non-zero if mouse button 1 is currently held down.*
- static int [event\\_button2](#) ()  
*Returns non-zero if button 2 is currently held down.*
- static int [event\\_button3](#) ()  
*Returns non-zero if button 3 is currently held down.*
- static void [set\\_idle](#) (void(\*cb)())  
*Sets an idle callback.*
- static void [grab](#) ([Fl\\_Window](#) &win)  
*See [Fl\\_Window\\*](#) [grab\(\)](#).*
- static void [release](#) ()  
*Releases the current grabbed window, equals grab(0).*
- static void [visible\\_focus](#) (int v)  
*Gets or sets the visible keyboard focus on buttons and other non-text widgets.*
- static int [visible\\_focus](#) ()  
*Gets or sets the visible keyboard focus on buttons and other non-text widgets.*
- static void [dnd\\_text\\_ops](#) (int v)  
*Gets or sets whether drag and drop text operations are supported.*
- static int [dnd\\_text\\_ops](#) ()  
*Gets or sets whether drag and drop text operations are supported.*

- static void `lock ()`

*The `lock()` method blocks the current thread until it can safely access FLTK widgets and data.*

- static void `unlock ()`

*The `unlock()` method releases the lock that was set using the `lock()` method.*

- static void `awake (void *message=0)`

*The `awake()` method sends a message pointer to the main thread, causing any pending `Fl::wait()` call to terminate so that the main thread can retrieve the message and any pending redraws can be processed.*

- static int `awake (Fl_Awake_Handler cb, void *message=0)`

*See void `awake(void* message=0)`.*

- static void \* `thread_message ()`

*The `thread_message()` method returns the last message that was sent from a child by the `awake()` method.*

- static void `delete_widget (Fl_Widget *w)`

*Schedules a widget for deletion at the next call to the event loop.*

- static void `do_widget_deletion ()`

*Deletes widgets previously scheduled for deletion.*

- static void `watch_widget_pointer (Fl_Widget *&w)`

*Adds a widget pointer to the watch list.*

- static void `release_widget_pointer (Fl_Widget *&w)`

*Releases a widget pointer to the watch list.*

- static void `clear_widget_pointer (Fl_Widget const *w)`

*Clears a widget pointer in the watch list.*

- static cairo\_t \* `cairo_make_current (Fl_Window *w)`

*Provides a corresponding cairo context for window wi.*

- static void `cairo_autolink_context (bool alink)`

*when HAVE\_CAIRO is defined and `cairo_autolink_context()` is true, any current window dc is linked to a current context.*

- static bool `cairo_autolink_context ()`

*Gets the current autolink mode for cairo support.,*

- static cairo\_t \* `cairo_cc ()`

*Gets the current cairo context linked with a fltk window.*

- static void `cairo_cc (cairo_t *c, bool own=false)`

*Sets the cairo current context to c, set own to true if you want fltk to handle this cc deletion.*

## Static Public Attributes

- static void(\* **idle** )()
 

*The currently executing idle callback function: DO NOT USE THIS DIRECTLY!*
- static const char \*const **help** = helpmsg+13
 

*Usage string displayed if [Fl::args\(\)](#) detects an invalid argument.*
- static void(\* **warning** )(const char \*,...) = ::[warning](#)

*FLTK calls this to print a warning message.*
- static void(\* **error** )(const char \*,...) = ::[error](#)

*FLTK calls this to print a normal error message.*
- static void(\* **fatal** )(const char \*,...) = ::[fatal](#)

*FLTK calls this to print a fatal error message.*
- static void(\* **atclose** )(Fl\_Window \*, void \*) = default\_atclose
 

*Back compatibility: default window callback handler.*

### 30.1.1 Detailed Description

The [Fl](#) is the FLTK global (static) containing state information and global methods for the current application.

### 30.1.2 Member Function Documentation

#### 30.1.2.1 int Fl::add\_awake\_handler\_ (Fl\_Awake\_Handler *func*, void \* *data*) [static]

Adds an awake handler for use in [awake\(\)](#).

Referenced by [awake\(\)](#).

#### 30.1.2.2 void Fl::add\_check (Fl\_Timeout\_Handler *cb*, void \* *argp* = 0) [static]

FLTK will call this callback just before it flushes the display and waits for events.

This is different than an idle callback because it is only called once, then FLTK calls the system and tells it not to return until an event happens.

This can be used by code that wants to monitor the application's state, such as to keep a display up to date. The advantage of using a check callback is that it is called only when no events are pending. If events are coming in quickly, whole blocks of them will be processed before this is called once. This can save significant time and avoid the application falling behind the events.

Sample code:

```
bool state_changed; // anything that changes the display turns this on
void callback(void*)
{
  if (!state_changed) return;
  state_changed = false;
```

```

do_expensive_calculation();
widget->redraw();
}

main() {
    Fl::add_check(callback);
    return Fl::run();
}

```

### 30.1.2.3 static void Fl::add\_fd (int *fd*, int *when*, void(\*)(int, void \*) *cb*, void \* = 0) [static]

Add file descriptor fd to listen to.

When the fd becomes ready for reading [Fl::wait\(\)](#) will call the callback and then return. The callback is passed the fd and the arbitrary void\* argument.

The second version takes a when bitfield, with the bits FL\_READ, FL\_WRITE, and FL\_EXCEPT defined, to indicate when the callback should be done.

There can only be one callback of each type for a file descriptor. [Fl::remove\\_fd\(\)](#) gets rid of *all* the callbacks for a given file descriptor.

Under UNIX *any* file descriptor can be monitored (files, devices, pipes, sockets, etc.) Due to limitations in Microsoft Windows, WIN32 applications can only monitor sockets.

### 30.1.2.4 void Fl::add\_idle (void(\*)(void \*) *cb*, void \* *data* = 0) [static]

Adds a callback function that is called every time by [Fl::wait\(\)](#) and also makes it act as though the timeout is zero (this makes [Fl::wait\(\)](#) return immediately, so if it is in a loop it is called repeatedly, and thus the idle function is called repeatedly).

The idle function can be used to get background processing done.

You can have multiple idle callbacks. To remove an idle callback use [Fl::remove\\_idle\(\)](#).

[Fl::wait\(\)](#) and [Fl::check\(\)](#) call idle callbacks, but [Fl::ready\(\)](#) does not.

The idle callback can call any FLTK functions, including [Fl::wait\(\)](#), [Fl::check\(\)](#), and [Fl::ready\(\)](#).

FLTK will not recursively call the idle callback.

References [set\\_idle\(\)](#).

### 30.1.2.5 void Fl::add\_timeout (double *t*, Fl\_Timeout\_Handler *cb*, void \* *argp* = 0) [static]

Adds a one-shot timeout callback.

The function will be called by [Fl::wait\(\)](#) at *t* seconds after this function is called. The optional void\* argument is passed to the callback.

You can have multiple timeout callbacks. To remove an timeout callback use [Fl::remove\\_timeout\(\)](#).

If you need more accurate, repeated timeouts, use [Fl::repeat\\_timeout\(\)](#) to reschedule the subsequent timeouts.

The following code will print "TICK" each second on stdout with a fair degree of accuracy:

```

void callback(void*) {
    puts("TICK");
    Fl::repeat_timeout(1.0, callback);
}

```

```

}

int main() {
    Fl::add_timeout(1.0, callback);
    return Fl::run();
}

```

References `repeat_timeout()`.

Referenced by `Fl_Tooltip::enter_area()`, `Fl_Free::Fl_Free()`, `Fl_Text_Display::handle()`, `Fl_Scrollbar::handle()`, `Fl_Repeat_Button::handle()`, `Fl_Counter::handle()`, `Fl_Timer::suspended()`, and `Fl_Timer::value()`.

### 30.1.2.6 int Fl::arg (int argc, char \*\*argv, int & i) [static]

Consume a single switch from argv, starting at word i.

Returns the number of words eaten (1 or 2, or 0 if it is not recognized) and adds the same value to i. You can use this function if you prefer to control the incrementing through the arguments yourself.

References `Fl_Tooltip::disable()`, `display()`, `dnd_text_ops()`, `Fl_Tooltip::enable()`, `scheme()`, and `visible_focus()`.

Referenced by `args()`.

### 30.1.2.7 int Fl::args (int argc, char \*\*argv, int & i, int(\*)(int, char \*\*, int &) cb = 0) [static]

Consume all switches from argv.

Returns number of words eaten Returns zero on error. 'i' will either point at first word that does not start with '-' , at the error word, or after a '-' , or at argc. If your program does not take any word arguments you can report an error if  $i < argc$ .

FLTK provides an *entirely optional* command-line switch parser. You don't have to call it if you don't like them! Everything it can do can be done with other calls to FLTK.

To use the switch parser, call `Fl::args(...)` near the start of your program. This does *not* open the display, instead switches that need the display open are stashed into static variables. Then you *must* display your first window by calling `window->show(argc,argv)`, which will do anything stored in the static variables.

callback lets you define your own switches. It is called with the same argc and argv, and with i the index of each word. The callback should return zero if the switch is unrecognized, and not change i. It should return non-zero if the switch is recognized, and add at least 1 to i (it can add more to consume words after the switch). This function is called *before* any other tests, so you *can override any FLTK switch* (this is why FLTK can use very short switches instead of the long ones all other toolkits force you to use).

On return i is set to the index of the first non-switch. This is either:

- The first word that does not start with '-' .
- The word '-' (used by many programs to name stdin as a file)
- The first unrecognized switch (return value is 0).
- argc

The return value is i unless an unrecognized switch is found, in which case it is zero. If your program takes no arguments other than switches you should produce an error if the return value is less than argc.

All switches except -bg2 may be abbreviated one letter and case is ignored:

- -bg color or -background color  
Sets the background color using [Fl::background\(\)](#).
- -bg2 color or -background2 color  
Sets the secondary background color using [Fl::background2\(\)](#).
- -display host:n.n  
Sets the X display to use; this option is silently ignored under WIN32 and MacOS.
- -dnd and -nodnd  
Enables or disables drag and drop text operations using [Fl::dnd\\_text\\_ops\(\)](#).
- -fg color or -foreground color  
Sets the foreground color using [Fl::foreground\(\)](#).
- -geometry WxH+X+Y  
Sets the initial window position and size according the the standard X geometry string.
- -iconic  
Iconifies the window using [Fl\\_Window::iconize\(\)](#).
- -kbd and -nokbd  
Enables or disables visible keyboard focus for non-text widgets using [Fl::visible\\_focus\(\)](#).
- -name string  
Sets the window class using [Fl\\_Window::xclass\(\)](#).
- -scheme string  
Sets the widget scheme using [Fl::scheme\(\)](#).
- -title string  
Sets the window title using [Fl\\_Window::label\(\)](#).
- -tooltips and -notooltips  
Enables or disables tooltips using [Fl\\_Tooltip::enable\(\)](#).

The second form of [Fl::args\(\)](#) is useful if your program does not have command line switches of its own. It parses all the switches, and if any are not recognized it calls [Fl::abort\(Fl::help\)](#).

A usage string is displayed if [Fl::args\(\)](#) detects an invalid argument on the command-line. You can change the message by setting the [Fl::help](#) pointer.

References [arg\(\)](#).

Referenced by [args\(\)](#), and [Fl\\_Window::show\(\)](#).

### **30.1.2.8 void Fl::background (uchar r, uchar g, uchar b) [static]**

Changes [fl\\_color\(Fl\\_BACKGROUND\\_COLOR\)](#) to the given color, and changes the gray ramp from 32 to 56 to black to white.

These are the colors used as backgrounds by almost all widgets and used to draw the edges of all the boxtypes.

References [set\\_color\(\)](#).

Referenced by [get\\_system\\_colors\(\)](#).

**30.1.2.9 void Fl::background2 (uchar r, uchar g, uchar b) [static]**

Changes the alternative background color.

This color is used as a background by [Fl\\_Input](#) and other text widgets.

This call may change fl\_color(FL\_FOREGROUND\_COLOR) if it does not provide sufficient contrast to FL\_BACKGROUND2\_COLOR.

References FL\_BACKGROUND2\_COLOR, FL\_FOREGROUND\_COLOR, get\_color(), and set\_color().

Referenced by get\_system\_colors().

**30.1.2.10 int Fl::box\_dh (Fl\_Boxtype t) [static]**

Returns the height offset for the given boxtyle.

**See also:**

[box\\_dy\(\)](#).

Referenced by Fl\_Browser\_::bbox(), Fl\_Window::draw(), Fl\_Value\_Slider::draw(), Fl\_Value\_Output::draw(), Fl\_Slider::draw(), Fl\_Scrollbar::draw(), Fl\_Scroll::draw(), Fl\_Roller::draw(), Fl\_Progress::draw(), Fl\_Pack::draw(), Fl\_Menu\_Bar::draw(), Fl\_Input::draw(), Fl\_File\_Input::draw(), Fl\_Dial::draw(), Fl\_Chart::draw(), Fl\_Group::draw\_children(), Fl\_Widget::draw\_focus(), Fl\_Widget::draw\_label(), Fl\_Input\_::drawtext(), Fl\_Value\_Slider::handle(), Fl\_Slider::handle(), Fl\_Input::handle(), Fl\_Text\_Display::resize(), and Fl\_Help\_View::resize().

**30.1.2.11 int Fl::box\_dw (Fl\_Boxtype t) [static]**

Returns the width offset for the given boxtyle.

**See also:**

[box\\_dy\(\)](#).

Referenced by Fl\_Browser\_::bbox(), Fl\_Window::draw(), Fl\_Value\_Slider::draw(), Fl\_Value\_Output::draw(), Fl\_Slider::draw(), Fl\_Scrollbar::draw(), Fl\_Scroll::draw(), Fl\_Roller::draw(), Fl\_Progress::draw(), Fl\_Pack::draw(), Fl\_Menu\_Item::draw(), Fl\_Light\_Button::draw(), Fl\_Input::draw(), Fl\_File\_Input::draw(), Fl\_Dial::draw(), Fl\_Chart::draw(), Fl\_Group::draw\_children(), Fl\_Widget::draw\_focus(), Fl\_Widget::draw\_label(), Fl\_Input\_::drawtext(), Fl\_Value\_Slider::handle(), Fl\_Slider::handle(), Fl\_Input::handle(), Fl\_Text\_Display::resize(), and Fl\_Help\_View::resize().

**30.1.2.12 int Fl::box\_dx (Fl\_Boxtype t) [static]**

Returns the X offset for the given boxtyle.

**See also:**

[box\\_dy\(\)](#)

Referenced by Fl\_Browser\_::bbox(), Fl\_Window::draw(), Fl\_Value\_Slider::draw(), Fl\_Value\_Output::draw(), Fl\_Slider::draw(), Fl\_Scrollbar::draw(), Fl\_Scroll::draw(), Fl\_Roller::draw(), Fl\_Progress::draw(), Fl\_Pack::draw(), Fl\_Menu\_Item::draw(), Fl\_Light\_Button::draw(), Fl\_Input::draw(),

`Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Group::draw_children()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `Fl_Input::drawtext()`, `Fl_Value_Slider::handle()`, `Fl_Slider::handle()`, `Fl_Input::handle()`, `Fl_Text_Display::resize()`, and `Fl_Help_View::resize()`.

### 30.1.2.13 int Fl::box\_dy (Fl\_Boxtype t) [static]

Returns the Y offset for the given boxtyle.

These functions return the offset values necessary for a given boxtyle, useful for computing the area inside a box's borders, to prevent overrawing the borders.

For instance, in the case of a boxtyle like `FL_DOWN_BOX` where the border width might be 2 pixels all around, the above functions would return 2, 2, 4, and 4 for `box_dx`, `box_dy`, `box_dw`, and `box_dh` respectively.

An example to compute the area inside a widget's box():

```
int X = yourwidget->x() + Fl::box_dx(yourwidget->box());
int Y = yourwidget->y() + Fl::box_dy(yourwidget->box());
int W = yourwidget->w() - Fl::box_dw(yourwidget->box());
int H = yourwidget->h() - Fl::box_dh(yourwidget->box());
```

These functions are mainly useful in the draw() code for deriving custom widgets, where one wants to avoid drawing over the widget's own border box().

Referenced by `Fl_Browser::bbox()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Slider::draw()`, `Fl_Scrollbar::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Progress::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Bar::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Group::draw_children()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `Fl_Input::drawtext()`, `Fl_Value_Slider::handle()`, `Fl_Slider::handle()`, `Fl_Input::handle()`, `Fl_Text_Display::resize()`, and `Fl_Help_View::resize()`.

### 30.1.2.14 int Fl::check () [static]

Same as `Fl::wait(0)`.

Calling this during a big calculation will keep the screen up to date and the interface responsive:

```
while (!calculation_done()) {
    calculate();
    Fl::check();
    if (user_hit_abort_button()) break;
}
```

The returns non-zero if any windows are displayed, and 0 if no windows are displayed (this is likely to change in future versions of FLTK).

References `wait()`.

Referenced by `Fl_File_Chooser::rescan_keep_filename()`.

### 30.1.2.15 static int Fl::damage () [inline, static]

If true then `flush()` will do something.

Referenced by `flush()`.

**30.1.2.16 void Fl::display (const char \* *d*) [static]**

Sets the X display to use for all windows.

Actually this just sets the environment variable \$DISPLAY to the passed string, so this only works before you show() the first window or otherwise open the display, and does nothing useful under WIN32.

Referenced by arg().

**30.1.2.17 static int Fl::dnd\_text\_ops () [inline, static]**

Gets or sets whether drag and drop text operations are supported.

This specifically affects whether selected text can be dragged from text fields or dragged within a text field as a cut/paste shortcut.

Referenced by arg(), Fl\_Input::handle(), and Fl\_Window::show().

**30.1.2.18 static void Fl::dnd\_text\_ops (int *v*) [inline, static]**

Gets or sets whether drag and drop text operations are supported.

This specifically affects whether selected text can be dragged from text fields or dragged within a text field as a cut/paste shortcut.

**30.1.2.19 int Fl::draw\_box\_active () [static]**

Determines if the current draw box is active or inactive.

If inactive, the box color is changed by the inactive color.

**30.1.2.20 void Fl::flush () [static]**

Causes all the windows that need it to be redrawn and graphics forced out through the pipes.

This is what [wait\(\)](#) does before looking for events.

References Fl\_Widget::clear\_damage(), Fl\_Widget::damage(), damage(), and Fl\_Widget::visible\_r().

Referenced by Fl\_File\_Chooser::show(), and wait().

**30.1.2.21 void Fl::foreground (uchar *r*, uchar *g*, uchar *b*) [static]**

Changes fl\_color(FL\_FOREGROUND\_COLOR).

References FL\_FOREGROUND\_COLOR, and set\_color().

Referenced by get\_system\_colors().

**30.1.2.22 int Fl::get\_awake\_handler\_ (Fl\_Awake\_Handler & *func*, void \*& *data*) [static]**

Gets the last stored awake handler for use in [awake\(\)](#).

**30.1.2.23 Fl\_Box\_Draw\_F \* Fl::get\_boxtype (Fl\_Boxtype t) [static]**

Gets the current box drawing function for the specified box type.

**30.1.2.24 void Fl::get\_system\_colors () [static]**

Read the user preference colors from the system and use them to call [Fl::foreground\(\)](#), [Fl::background\(\)](#), and [Fl::background2\(\)](#).

This is done by [Fl\\_Window::show\(argc,argv\)](#) before applying the -fg and -bg switches.

On X this reads some common values from the Xdefaults database. KDE users can set these values by running the "krdb" program, and newer versions of KDE set this automatically if you check the "apply style to other X programs" switch in their control panel.

References [background\(\)](#), [background2\(\)](#), [first\\_window\(\)](#), [foreground\(\)](#), and [Fl\\_Window::xclass\(\)](#).

Referenced by [Fl\\_Window::show\(\)](#).

**30.1.2.25 int Fl::gl\_visual (int mode, int \* alist = 0) [static]**

This does the same thing as [Fl::visual\(int\)](#) but also requires OpenGL drawing to work.

This *must* be done if you want to draw in normal windows with OpenGL with [gl\\_start\(\)](#) and [gl\\_end\(\)](#). It may be useful to call this so your X windows use the same visual as an [Fl\\_GL\\_Window](#), which on some servers will reduce colormap flashing.

See [Fl\\_GL\\_Window](#) for a list of additional values for the argument.

**30.1.2.26 void Fl::own\_colormap () [static]**

Makes FLTK use its own colormap.

This may make FLTK display better and will reduce conflicts with other programs that want lots of colors. However the colors may flash as you move the cursor between windows.

This does nothing if the current visual is not colormapped.

**30.1.2.27 int Fl::ready () [static]**

This is similar to [Fl::check\(\)](#) except this does *not* call [Fl::flush\(\)](#) or any callbacks, which is useful if your program is in a state where such callbacks are illegal.

This returns true if [Fl::check\(\)](#) would do anything (it will continue to return true until you call [Fl::check\(\)](#) or [Fl::wait\(\)](#)).

```
while (!calculation_done()) {
    calculate();
    if (Fl::ready()) {
        do_expensive_cleanup();
        Fl::check();
        if (user_hit_abort_button()) break;
    }
}
```

**30.1.2.28 static void Fl::release () [inline, static]**

Releases the current grabbed window, equals grab(0).

See [Fl\\_Window\\* grab\(\)](#)

Referenced by [Fl\\_Menu\\_Item::pulldown\(\)](#).

**30.1.2.29 int Fl::reload\_scheme () [static]**

Called by scheme according to scheme name.

Loads or reloads the current scheme selection. See [void scheme\(const char \\*name\)](#)

References [\\_FL\\_ROUND\\_DOWN\\_BOX](#), [\\_FL\\_ROUND\\_UP\\_BOX](#), [Fl\\_Widget::align\(\)](#), [first\\_window\(\)](#), [FL\\_ALIGN\\_CENTER](#), [FL\\_ALIGN\\_CLIP](#), [FL\\_ALIGN\\_INSIDE](#), [fl\\_down\\_box\(\)](#), [FL\\_DOWN\\_BOX](#), [fl\\_down\\_frame\(\)](#), [FL\\_DOWN\\_FRAME](#), [FL\\_NO\\_LABEL](#), [FL\\_NORMAL\\_LABEL](#), [fl\\_thin\\_down\\_box\(\)](#), [FL\\_THIN\\_DOWN\\_BOX](#), [fl\\_thin\\_down\\_frame\(\)](#), [FL\\_THIN\\_DOWN\\_FRAME](#), [fl\\_thin\\_up\\_box\(\)](#), [FL\\_THIN\\_UP\\_BOX](#), [fl\\_thin\\_up\\_frame\(\)](#), [FL\\_THIN\\_UP\\_FRAME](#), [fl\\_up\\_box\(\)](#), [FL\\_UP\\_BOX](#), [fl\\_up\\_frame\(\)](#), [FL\\_UP\\_FRAME](#), [get\\_color\(\)](#), [h\(\)](#), [Fl\\_Widget::image\(\)](#), [Fl\\_Widget::labeltype\(\)](#), [next\\_window\(\)](#), [Fl\\_Widget::redraw\(\)](#), [scrollbar\\_size\(\)](#), [set\\_boxtyle\(\)](#), [Fl\\_Pixmap::uncache\(\)](#), and [w\(\)](#).

Referenced by [scheme\(\)](#).

**30.1.2.30 void Fl::remove\_check (Fl\_Timeout\_Handler cb, void \*argp = 0) [static]**

Removes a check callback.

It is harmless to remove a check callback that no longer exists.

**30.1.2.31 static void Fl::remove\_fd (int) [static]**

Removes a file descriptor handler.

**30.1.2.32 static void Fl::remove\_fd (int, int when) [static]**

Removes a file descriptor handler.

**30.1.2.33 void Fl::remove\_timeout (Fl\_Timeout\_Handler cb, void \*argp = 0) [static]**

Removes a timeout callback.

It is harmless to remove a timeout callback that no longer exists.

Referenced by [Fl\\_Repeat\\_Button::deactivate\(\)](#), [Fl\\_Tooltip::enter\\_area\(\)](#), [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Scrollbar::handle\(\)](#), [Fl\\_Repeat\\_Button::handle\(\)](#), [Fl\\_Counter::handle\(\)](#), [Fl\\_Clock::handle\(\)](#), [Fl\\_Timer::suspended\(\)](#), [Fl\\_Timer::value\(\)](#), [Fl\\_Clock::~Fl\\_Clock\(\)](#), [Fl\\_Counter::~Fl\\_Counter\(\)](#), [Fl\\_File\\_Chooser::~Fl\\_File\\_Chooser\(\)](#), [Fl\\_Free::~Fl\\_Free\(\)](#), [Fl\\_Scrollbar::~Fl\\_Scrollbar\(\)](#), [Fl\\_Text\\_Display::~Fl\\_Text\\_Display\(\)](#), and [Fl\\_Timer::~Fl\\_Timer\(\)](#).

---

**30.1.2.34 void Fl::repeat\_timeout (double *t*, Fl\_Timeout\_Handler *cb*, void \* *argp* = 0) [static]**

This method repeats a timeout callback from the expiration of the previous timeout, allowing for more accurate timing.

You may only call this method inside a timeout callback.

The following code will print "TICK" each second on stdout with a fair degree of accuracy:

```
void callback(void*) {
    puts("TICK");
    Fl::repeat_timeout(1.0, callback);
}

int main() {
    Fl::add_timeout(1.0, callback);
    return Fl::run();
}
```

Referenced by add\_timeout().

**30.1.2.35 int Fl::run () [static]**

As long as any windows are displayed this calls [Fl::wait\(\)](#) repeatedly.

When all the windows are closed it returns zero (supposedly it would return non-zero on any errors, but FLTK calls exit directly for these). A normal program will end main() with return [Fl::run\(\)](#);

References wait().

**30.1.2.36 int Fl::scheme (const char \* *s*) [static]**

Gets or sets the current widget scheme.

NULL will use the scheme defined in the FLTK\_SCHEME environment variable or the scheme resource under X11. Otherwise, any of the following schemes can be used:

- "none" - This is the default look-n-feel which resembles old Windows (95/98/Me/NT/2000) and old GTK/KDE
- "plastic" - This scheme is inspired by the Aqua user interface on Mac OS X
- "gtk+" - This scheme is inspired by the Red Hat Bluecurve theme

References first\_window(), reload\_scheme(), and Fl\_Window::xclass().

**30.1.2.37 void Fl::set\_boxtype (Fl\_Boxtype *to*, Fl\_Boxtype *from*) [static]**

Copies the from boxtyle.

**30.1.2.38 void Fl::set\_boxtype (Fl\_Boxtype *t*, Fl\_Box\_Draw\_F \**f*, uchar *a*, uchar *b*, uchar *c*, uchar *d*) [static]**

Sets the function to call to draw a specific boxtyle.

Referenced by reload\_scheme().

**30.1.2.39 static void Fl::set\_idle (void(\*)() cb) [inline, static]**

Sets an idle callback.

This method is obsolete - use the [add\\_idle\(\)](#) method instead.

Referenced by [add\\_idle\(\)](#), and [remove\\_idle\(\)](#).

**30.1.2.40 static void Fl::set\_labeltype (Fl\_Labeltype, Fl\_Labeltype *from*) [static]**

Sets the functions to call to draw and measure a specific labeltype.

**30.1.2.41 void Fl::set\_labeltype (Fl\_Labeltype *t*, Fl\_Label\_Draw\_F \**f*, Fl\_Label\_Measure\_F \**m*) [static]**

Sets the functions to call to draw and measure a specific labeltype.

Referenced by [Fl\\_Pixmap::label\(\)](#), [Fl\\_RGB\\_Image::label\(\)](#), [Fl\\_Image::label\(\)](#), [Fl\\_File\\_Icon::label\(\)](#), and [Fl\\_Bitmap::label\(\)](#).

**30.1.2.42 double Fl::version () [static]**

Returns the compiled-in value of the FL\_VERSION constant.

This is useful for checking the version of a shared library.

References FL\_VERSION.

**30.1.2.43 static int Fl::visible\_focus () [inline, static]**

Gets or sets the visible keyboard focus on buttons and other non-text widgets.

The default mode is to enable keyboard focus for all widgets.

Referenced by [arg\(\)](#), [Fl\\_Widget::draw\\_focus\(\)](#), [Fl\\_Value\\_Slider::handle\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Tabs::handle\(\)](#), [Fl\\_Slider::handle\(\)](#), [Fl\\_Roller::handle\(\)](#), [Fl\\_Repeat\\_Button::handle\(\)](#), [Fl\\_Menu\\_Button::handle\(\)](#), [Fl\\_Counter::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Browser\\_::handle\(\)](#), and [Fl\\_Adjuster::handle\(\)](#).

**30.1.2.44 static void Fl::visible\_focus (int *v*) [inline, static]**

Gets or sets the visible keyboard focus on buttons and other non-text widgets.

The default mode is to enable keyboard focus for all widgets.

**30.1.2.45 int Fl::visual (int *flags*) [static]**

Selects a visual so that your graphics are drawn correctly.

This is only allowed before you call [show\(\)](#) on any windows. This does nothing if the default visual satisfies the capabilities, or if no visual satisfies the capabilities, or on systems that don't have such brain-dead notions.

Only the following combinations do anything useful:

- `Fl::visual(FL_RGB)`

Full/true color (if there are several depths FLTK chooses the largest). Do this if you use `fl_draw_`-image for much better (non-dithered) output.

- `Fl::visual(FL_RGB8)`

Full color with at least 24 bits of color. `FL_RGB` will always pick this if available, but if not it will happily return a less-than-24 bit deep visual. This call fails if 24 bits are not available.

- `Fl::visual(FL_DOUBLE|FL_INDEX)`

Hardware double buffering. Call this if you are going to use [Fl\\_Double\\_Window](#).

- `Fl::visual(FL_DOUBLE|FL_RGB)`

- `Fl::visual(FL_DOUBLE|FL_RGB8)`

Hardware double buffering and full color.

This returns true if the system has the capabilities by default or FLTK succeeded in turning them on. Your program will still work even if this returns false (it just won't look as good).

### **30.1.2.46 int Fl::wait () [static]**

Waits until "something happens" and then returns.

Call this repeatedly to "run" your program. You can also check what happened each time after this returns, which is quite useful for managing program state.

What this really does is call all idle callbacks, all elapsed timeouts, call `Fl::flush()` to get the screen to update, and then wait some time (zero if there are idle callbacks, the shortest of all pending timeouts, or infinity), for any events from the user or any `Fl::add_fd()` callbacks. It then handles the events and calls the callbacks and then returns.

The return value of the first form is non-zero if there are any visible windows - this may change in future versions of FLTK.

The second form waits a maximum of *time* seconds. *It can return much sooner if something happens.*

The return value is positive if an event or fd happens before the time elapsed. It is zero if nothing happens (on Win32 this will only return zero if *time* is zero). It is negative if an error occurs (this will happen on UNIX if a signal happens).

Referenced by `check()`, `Fl_Color_Chooser::fl_color_chooser()`, `Fl_File_Chooser::fl_dir_chooser()`, `Fl_File_Chooser::fl_file_chooser()`, `Fl_Menu_Item::popup()`, and `run()`.

## **30.1.3 Member Data Documentation**

### **30.1.3.1 const char \*const Fl::help = helpmsg+13 [static]**

Usage string displayed if `Fl::args()` detects an invalid argument.

This may be changed to point to customized text at run-time.

**30.1.3.2 void(\* Fl::idle)() () [static]**

The currently executing idle callback function: DO NOT USE THIS DIRECTLY!

This is now used as part of a higher level system allowing multiple idle callback functions to be called.

**See also:**

[add\\_idle\(\)](#), [remove\\_idle\(\)](#)

Referenced by [wait\(\)](#).

The documentation for this class was generated from the following files:


- [Fl.H](#)
- [Fl.cxx](#)
- [Fl\\_abort.cxx](#)
- [Fl\\_add\\_idle.cxx](#)
- [Fl\\_arg.cxx](#)
- [fl\\_boxtype.cxx](#)
- [Fl\\_Browser\\_.cxx](#)
- [Fl\\_Cairo.cxx](#)
- [fl\\_color.cxx](#)
- [fl\\_color\\_mac.cxx](#)
- [fl\\_color\\_win32.cxx](#)
- [Fl\\_compose.cxx](#)
- [Fl\\_display.cxx](#)
- [fl\\_dnd\\_mac.cxx](#)
- [fl\\_dnd\\_win32.cxx](#)
- [fl\\_dnd\\_x.cxx](#)
- [Fl\\_get\\_key.cxx](#)
- [Fl\\_get\\_key\\_mac.cxx](#)
- [Fl\\_get\\_key\\_win32.cxx](#)
- [Fl\\_get\\_system\\_colors.cxx](#)
- [Fl\\_grab.cxx](#)
- [fl\\_labeltype.cxx](#)
- [Fl\\_lock.cxx](#)
- [Fl\\_own\\_colormap.cxx](#)
- [fl\\_set\\_font.cxx](#)
- [fl\\_set\\_fonts\\_mac.cxx](#)
- [fl\\_set\\_fonts\\_win32.cxx](#)
- [fl\\_set\\_fonts\\_x.cxx](#)
- [fl\\_set\\_fonts\\_xft.cxx](#)
- [fl\\_shortcut.cxx](#)
- [Fl\\_visual.cxx](#)
- [Fl\\_Widget.cxx](#)
- [Fl\\_Window.cxx](#)
- [gl\\_start.cxx](#)
- [screen\\_xywh.cxx](#)

## 30.2 Fl\_Adjuster Class Reference

The [Fl\\_Adjuster](#) widget was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range.

```
#include <Fl_Adjuster.H>
```

Inheritance diagram for Fl\_Adjuster::



### Public Member Functions

- [Fl\\_Adjuster](#) (int X, int Y, int W, int H, const char \*l=0)  
*Creates a new [Fl\\_Adjuster](#) widget using the given position, size, and label string.*
- void [soft](#) (int s)  
*If "soft" is turned on, the user is allowed to drag the value outside the range.*
- int [soft](#) () const  
*If "soft" is turned on, the user is allowed to drag the value outside the range.*

### Protected Member Functions

- void [draw](#) ()  
*Draw the widget.*
- int [handle](#) (int)  
*Handles the specified event.*
- void [value\\_damage](#) ()  
*Asks for partial redraw.*

#### 30.2.1 Detailed Description

The [Fl\\_Adjuster](#) widget was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range.



Figure 30.1: Fl\_Adjuster

When you press a button and drag to the right the value increases. When you drag to the left it decreases. The largest button adjusts by `100 * step()`, the next by `10 * step()` and that smallest button by `step()`. Clicking on the buttons increments by 10 times the amount dragging by a pixel does. Shift + click decrements by 10 times the amount.

### 30.2.2 Constructor & Destructor Documentation

#### 30.2.2.1 `Fl_Adjuster::Fl_Adjuster (int X, int Y, int W, int H, const char *l = 0)`

Creates a new `Fl_Adjuster` widget using the given position, size, and label string.

It looks best if one of the dimensions is 3 times the other.

Inherited destructor destroys the Valuator.

References `Fl_Widget::box()`, `FL_SELECTION_COLOR`, `FL_UP_BOX`, `Fl_Widget::selection_color()`, and `Fl_Valuator::step()`.

### 30.2.3 Member Function Documentation

#### 30.2.3.1 `void Fl_Adjuster::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Bitmap::draw()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `fl_color()`, `FL_DOWN_BOX`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Widget::selection_color()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

#### 30.2.3.2 `int Fl_Adjuster::handle (int event) [protected, virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Valuator::clamp\(\)](#), [Fl::event\\_is\\_click\(\)](#), [Fl::event\\_key\(\)](#), [Fl::event\\_state\(\)](#), [Fl::event\\_x\(\)](#), [Fl::event\\_y\(\)](#), [FL\\_Down](#), [FL\\_DRAG](#), [FL\\_ENTER](#), [FL\\_FOCUS](#), [FL\\_KEYBOARD](#), [FL\\_LEAVE](#), [FL\\_Left](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [FL\\_Right](#), [FL\\_UNFOCUS](#), [FL\\_Up](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Valuator::handle\\_drag\(\)](#), [Fl\\_Valuator::handle\\_push\(\)](#), [Fl\\_Valuator::handle\\_release\(\)](#), [Fl\\_Valuator::increment\(\)](#), [Fl\\_Valuator::previous\\_value\(\)](#), [Fl\\_Widget::redraw\(\)](#), [soft\(\)](#), [Fl\\_Valuator::softclamp\(\)](#), [Fl\\_Valuator::value\(\)](#), [Fl::visible\\_focus\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

**30.2.3.3 int Fl\_Adjuster::soft () const [inline]**

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

Referenced by [handle\(\)](#).

**30.2.3.4 void Fl\_Adjuster::soft (int s) [inline]**

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

The documentation for this class was generated from the following files:


- [Fl\\_Adjuster.H](#)
- [Fl\\_Adjuster.cxx](#)

## 30.3 Fl\_Bitmap Class Reference

The [Fl\\_Bitmap](#) class supports caching and drawing of mono-color (bitmap) images.

```
#include <Fl_Bitmap.h>
```

Inheritance diagram for Fl\_Bitmap::



### Public Member Functions

- [Fl\\_Bitmap](#) (const uchar \*bits, int W, int H)  
*The constructors create a new bitmap from the specified bitmap data.*
- [Fl\\_Bitmap](#) (const char \*bits, int W, int H)  
*The constructors create a new bitmap from the specified bitmap data.*
- virtual [~Fl\\_Bitmap](#) ()  
*The destructor free all memory and server resources that are used by the bitmap.*
- virtual [Fl\\_Image \\* copy](#) (int W, int H)  
*The [copy\(\)](#) method creates a copy of the specified image.*
- [Fl\\_Image \\* copy](#) ()  
*The [copy\(\)](#) method creates a copy of the specified image.*
- virtual void [draw](#) (int X, int Y, int W, int H, int cx=0, int cy=0)  
*The [draw\(\)](#) methods draw the image.*
- void [draw](#) (int X, int Y)  
*The [draw\(\)](#) methods draw the image.*
- virtual void [label](#) ([Fl\\_Widget](#) \*w)  
*The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.*
- virtual void [label](#) ([Fl\\_Menu\\_Item](#) \*m)  
*The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.*
- virtual void [uncache](#) ()  
*If the image has been cached for display, delete the cache data.*

## Public Attributes

- `const uchar * array`  
*pointer to raw bitmap data*
- `int alloc_array`  
*Non-zero if array points to bitmap data allocated internally.*
- `unsigned id`  
*for internal use*

### 30.3.1 Detailed Description

The `Fl_Bitmap` class supports caching and drawing of mono-color (bitmap) images.

Images are drawn using the current color.

### 30.3.2 Constructor & Destructor Documentation

#### 30.3.2.1 `Fl_Bitmap::Fl_Bitmap (const uchar * bits, int W, int H)` [inline]

The constructors create a new bitmap from the specified bitmap data.

References `Fl_Image::data()`.

Referenced by `copy()`.

#### 30.3.2.2 `Fl_Bitmap::Fl_Bitmap (const char * array, int W, int H)` [inline]

The constructors create a new bitmap from the specified bitmap data.

References `Fl_Image::data()`.

### 30.3.3 Member Function Documentation

#### 30.3.3.1 `Fl_Image* Fl_Bitmap::copy ()` [inline]

The `copy()` method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of `Fl_Shared_Image`, released) when you are done with it.

Reimplemented from `Fl_Image`.

References `copy()`, `Fl_Image::h()`, and `Fl_Image::w()`.

Referenced by `copy()`.

#### 30.3.3.2 `Fl_Image * Fl_Bitmap::copy (int W, int H)` [virtual]

The `copy()` method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References `alloc_array`, `Fl_Bitmap()`, `Fl_Image::h()`, and `Fl_Image::w()`.

#### 30.3.3.3 void Fl\_Bitmap::draw (int X, int Y) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl\\_Image](#).

References `draw()`, `Fl_Image::h()`, and `Fl_Image::w()`.

Referenced by `draw()`.

#### 30.3.3.4 void Fl\_Bitmap::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl\\_Image](#).

References `Fl_Image::draw_empty()`, `fl_clip_box()`, `Fl_Image::h()`, and `Fl_Image::w()`.

Referenced by `Fl_FormsBitmap::draw()`, and `Fl_Adjuster::draw()`.

#### 30.3.3.5 void Fl\_Bitmap::label (Fl\_Menu\_Item \* m) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the `image()` or `deimage()` methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented from [Fl\\_Image](#).

References `_FL_IMAGE_LABEL`, `Fl_Menu_Item::label()`, `Fl_Widget::labeltype()`, and `Fl::set_labeltype()`.

#### 30.3.3.6 void Fl\_Bitmap::label (Fl\_Widget \* widget) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the `image()` or `deimage()` methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented from [Fl\\_Image](#).

References `Fl_Widget::image()`.

#### 30.3.3.7 void Fl\_Bitmap::uncache () [virtual]

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl\\_Image](#).

Referenced by [~Fl\\_Bitmap\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Bitmap.H](#)
- [Fl\\_Bitmap.cxx](#)

## 30.4 Fl\_BMP\_Image Class Reference

The [Fl\\_BMP\\_Image](#) class supports loading, caching, and drawing of Windows Bitmap (BMP) image files.

```
#include <Fl_BMP_Image.h>
```

Inheritance diagram for Fl\_BMP\_Image::



### Public Member Functions

- [Fl\\_BMP\\_Image](#) (const char \*filename)

*The constructor loads the named BMP image from the given bmp filename.*

#### 30.4.1 Detailed Description

The [Fl\\_BMP\\_Image](#) class supports loading, caching, and drawing of Windows Bitmap (BMP) image files.

#### 30.4.2 Constructor & Destructor Documentation

##### 30.4.2.1 Fl\_BMP\_Image::Fl\_BMP\_Image (const char \* bmp)

The constructor loads the named BMP image from the given bmp filename.

The inherited destructor free all memory and server resources that are used by the image.

The destructor free all memory and server resources that are used by the image

References [Fl\\_Image::d\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_BMP\\_Image.H](#)
- [Fl\\_BMP\\_Image.cxx](#)

## 30.5 Fl\_Box Class Reference

This widget simply draws its box, and possibly it's label.

```
#include <Fl_Box.H>
```

Inheritance diagram for Fl\_Box::



### Public Member Functions

- [Fl\\_Box \(int X, int Y, int W, int H, const char \\*l=0\)](#)
  - *The first constructor sets `box()` to `FL_NO_BOX`, which means it is invisible.*
- [Fl\\_Box \(Fl\\_Boxtype b, int X, int Y, int W, int H, const char \\*l\)](#)
  - See `Fl_Box::Fl_Box(int x, int y, int w, int h, const char * = 0)`.*
- virtual int [handle \(int\)](#)
  - Handles the specified event.*

### Protected Member Functions

- void [draw \(\)](#)
  - Draw the widget.*

#### 30.5.1 Detailed Description

This widget simply draws its box, and possibly it's label.

Putting it before some other widgets and making it big enough to surround them will let you draw a frame around them.

#### 30.5.2 Constructor & Destructor Documentation

##### 30.5.2.1 [Fl\\_Box::Fl\\_Box \(int X, int Y, int W, int H, const char \\*l = 0\) \[inline\]](#)

- The first constructor sets `box()` to `FL_NO_BOX`, which means it is invisible.

However such widgets are useful as placeholders or [Fl\\_Group::resizable\(\)](#) values. To change the box to something visible, use `box(n)`.

- The second form of the constructor sets the box to the specified box type.

The destructor removes the box.

### 30.5.3 Member Function Documentation

#### 30.5.3.1 void Fl\_Box::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References [Fl\\_Widget::draw\\_box\(\)](#), and [Fl\\_Widget::draw\\_label\(\)](#).

#### 30.5.3.2 int Fl\_Box::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

##### Parameters:

← *event* the kind of event received

##### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

##### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References [FL\\_ENTER](#), and [FL\\_LEAVE](#).

The documentation for this class was generated from the following files:


- [Fl\\_Box.H](#)
- [Fl\\_Box.cxx](#)

## 30.6 Fl\_Browser Class Reference

The [Fl\\_Browser](#) widget displays a scrolling list of text lines, and manages all the storage for the text.

```
#include <Fl_Browser.h>
```

Inheritance diagram for Fl\_Browser::

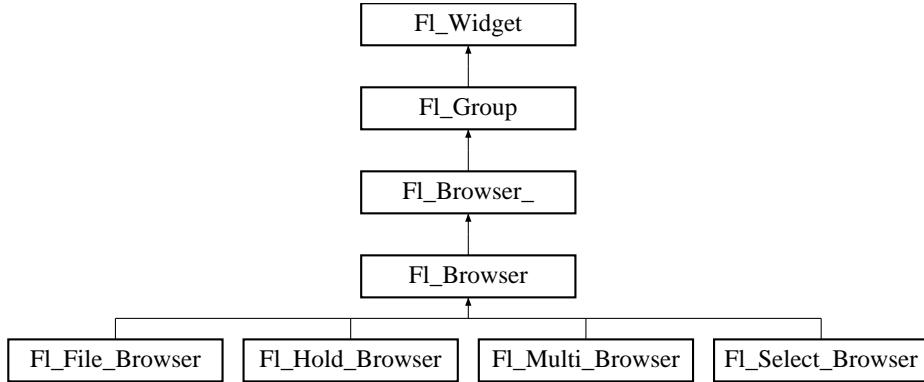

### Public Types

- enum [Fl\\_Line\\_Position](#) { **TOP**, **BOTTOM**, **MIDDLE** }

*For internal use only?*

### Public Member Functions

- void [remove](#) (int)
 

*Remove line n and make the browser one line shorter.*
- void [add](#) (const char \*, void \*=0)
 

*Add a new line to the end of the browser.*
- void [insert](#) (int, const char \*, void \*=0)
 

*Insert a new entry before given line.*
- void [move](#) (int to, int from)
 

*Line from is removed and reinserted at to; to is calculated after the line is removed.*
- int [load](#) (const char \*filename)
 

*Clears the browser and reads the file, adding each line from the file to the browser.*
- void [swap](#) (int a, int b)
 

*Swaps two lines in the browser.*
- void [clear](#) ()
 

*Remove all the lines in the browser.*

- int **size** () const  
*Returns how many lines are in the browser.*
- void **size** (int W, int H)  
*Change the size of the widget.*
- int **topline** () const  
*Returns the current top line in the browser.*
- void **lineposition** (int, **Fl\_Line\_Position**)  
*Update browser so that line is shown at given position.*
- void **topline** (int l)  
*Scrolls the browser so the top line in the browser is n.*
- void **bottomline** (int l)  
*Scrolls the browser so the bottom line in the browser is n.*
- void **middleline** (int l)  
*Scrolls the browser so the middle line in the browser is n.*
- int **select** (int, int=1)  
*Sets the selection state of entry.*
- int **selected** (int) const  
*Return 1 if line n is selected, 0 if it not selected.*
- void **show** (int n)  
*Makes line n visible for selection.*
- void **show** ()  
*Makes a widget visible.*
- void **hide** (int n)  
*Makes line n invisible, preventing selection by the user.*
- void **hide** ()  
*Makes a widget invisible.*
- int **visible** (int n) const  
*Returns a non-zero value if line is visible.*
- int **value** () const  
*Gets browser value.*
- void **value** (int v)  
*Sets the browser's value, i.e.*
- const char \* **text** (int) const  
*Returns data entry for line line, or NULL if out of range.*

- void **text** (int, const char \*)  
*Sets the text for line n to text newtext.*
- void \* **data** (int) const  
*Returns the data for line n, or NULL is n is out of range.*
- void **data** (int, void \*v)  
*Sets the data for line n to d.*
- **Fl\_Browser** (int, int, int, int, const char \*=0)  
*The constructor makes an empty browser.*
- **~Fl\_Browser** ()  
*The destructor deletes all list items and destroys the browser.*
- char **format\_char** () const  
*Gets the current format code prefix character, which by default is '@'.*
- void **format\_char** (char c)  
*Sets the current format code prefix character to c.*
- char **column\_char** () const  
*Gets the current column separator character.*
- void **column\_char** (char c)  
*Sets the column separator to c.*
- const int \* **column\_widths** () const  
*Gets the current column width array.*
- void **column\_widths** (const int \*l)  
*Sets the current array to w.*
- int **displayed** (int n) const  
*Returns non-zero if line n is visible.*
- void **make\_visible** (int n)  
*Redisplays so that line n is visible.*
- void **replace** (int a, const char \*b)  
*For back compatibility only.*
- void **display** (int, int=1)  
*For back compatibility.*

## Protected Member Functions

- `void * item_first () const`

*This method must be provided by the subclass to return the first item in the list.*

- `void * item_next (void *) const`

*This method must be provided by the subclass to return the item in the list after p.*

- `void * item_prev (void *) const`

*This method must be provided by the subclass to return the item in the list before p.*

- `int item_selected (void *) const`

*This method must be implemented by the subclass if it supports multiple selections in the browser.*

- `void item_select (void *, int)`

*This method must be implemented by the subclass if it supports multiple selections in the browser.*

- `int item_height (void *) const`

*Returns height of line lv.*

- `int item_width (void *) const`

*This method must be provided by the subclass to return the width of the item p in pixels.*

- `void item_draw (void *, int, int, int, int) const`

*This method must be provided by the subclass to draw the item p in the area indicated by x, y, w, and h.*

- `int full_height () const`

*This method may be provided by the subclass to indicate the full height of the item list in pixels.*

- `int incr_height () const`

*This method may be provided to return the average height of all items, to be used for scrolling.*

- `FL_BLINE * find_line (int) const`

*Return entry for line number line.*

- `FL_BLINE * _remove (int)`

*Remove entry for given line number.*

- `void insert (int, FL_BLINE *)`

*Insert a new line t before line n.*

- `int lineno (void *) const`

*Returns line number corresponding to data v, zero if not found.*

- `void swap (FL_BLINE *a, FL_BLINE *b)`

*Swap two lines, a and b.*

### 30.6.1 Detailed Description

The [Fl\\_Browser](#) widget displays a scrolling list of text lines, and manages all the storage for the text.

This is not a text editor or spreadsheet! But it is useful for showing a vertical list of named objects to the user.

Each line in the browser is identified by number. *The numbers start at one* (this is so that zero can be reserved for "no line" in the selective browsers). *Unless otherwise noted, the methods do not check to see if the passed line number is in range and legal. It must always be greater than zero and <= size()*.

Each line contains a null-terminated string of text and a void \* data pointer. The text string is displayed, the void \* pointer can be used by the callbacks to reference the object the text describes.

The base does nothing when the user clicks on it. The subclasses [Fl\\_Select\\_Browser](#), [Fl\\_Hold\\_Browser](#), and [Fl\\_Multi\\_Browser](#) react to user clicks to select lines in the browser and do callbacks.

The base called [Fl\\_Browser](#) provides the scrolling and selection mechanisms of this and all the subclasses, but the dimensions and appearance of each item are determined by the subclass. You can use [Fl\\_Browser](#) to display information other than text, or text that is dynamically produced from your own data structures. If you find that loading the browser is a lot of work or is inefficient, you may want to make a subof [Fl\\_Browser](#).

### 30.6.2 Constructor & Destructor Documentation

#### 30.6.2.1 [Fl\\_Browser::Fl\\_Browser \(int X, int Y, int W, int H, const char \\* L = 0\)](#)

The constructor makes an empty browser.

**Parameters:**

- ← *X,Y,W,H* position and size.
- ← *L* label string, may be NULL.

#### 30.6.2.2 [Fl\\_Browser::~Fl\\_Browser \(\) \[inline\]](#)

The destructor deletes all list items and destroys the browser.

References [Fl\\_Group::clear\(\)](#).

### 30.6.3 Member Function Documentation

#### 30.6.3.1 [FL\\_BLINE \\* Fl\\_Browser::\\_remove \(int line\) \[protected\]](#)

Remove entry for given line number.

**Parameters:**

- ← *line* line number. Must be in range!

**Returns:**

pointer to browser entry.

References [Fl\\_Browser::deleting\(\)](#), [find\\_line\(\)](#), and [item\\_height\(\)](#).

Referenced by [move\(\)](#), and [remove\(\)](#).

**30.6.3.2 void Fl\_Browser::add (const char \* newtext, void \* d = 0)**

Add a new line to the end of the browser.

The text is copied using the strdup() function. It may also be NULL to make a blank line. The void \* argument is returned as the [data\(\)](#) of the new item.

References [insert\(\)](#).

**30.6.3.3 void Fl\_Browser::bottomline (int l) [inline]**

Scrolls the browser so the bottom line in the browser is n.

**30.6.3.4 void Fl\_Browser::column\_char (char c) [inline]**

Sets the column separator to c.

This will only have an effect if you also set [column\\_widths\(\)](#).

**30.6.3.5 char Fl\_Browser::column\_char () const [inline]**

Gets the current column separator character.

By default this is '\t' (tab).

Referenced by [item\\_draw\(\)](#), [item\\_height\(\)](#), and [item\\_width\(\)](#).

**30.6.3.6 void Fl\_Browser::column\_widths (const int \* l) [inline]**

Sets the current array to w.

Make sure the last entry is zero.

**See also:**

`const int *Fl_Browser::column_widths() const`

**30.6.3.7 const int\* Fl\_Browser::column\_widths () const [inline]**

Gets the current column width array.

This array is zero-terminated and specifies the widths in pixels of each column. The text is split at each [column\\_char\(\)](#) and each part is formatted into it's own column. After the last column any remaining text is formatted into the space between the last column and the right edge of the browser, even if the text contains instances of [column\\_char\(\)](#). The default value is a one-element array of just a zero, which means there are no columns.

Referenced by [item\\_draw\(\)](#), [item\\_height\(\)](#), and [item\\_width\(\)](#).

**30.6.3.8 void Fl\_Browser::data (int line, void \* d)**

Sets the data for line n to d.

Does nothing if

is out of range.

References `find_line()`.

### **30.6.3.9 void Fl\_Browser::format\_char (char c) [inline]**

Sets the current format code prefix character to `c`.

The default prefix is '@'. Set the prefix to 0 to disable formatting.

**See also:**

[uchar Fl\\_Browser::format\\_char\(\) const](#)

### **30.6.3.10 char Fl\_Browser::format\_char () const [inline]**

Gets the current format code prefix character, which by default is '@'.

A string of formatting codes at the start of each column are stripped off and used to modify how the rest of the line is printed:

- '@.' Print rest of line, don't look for more '@' signs
- '@@' Print rest of line starting with '@'
- '@l' Use a LARGE (24 point) font
- '@m' Use a medium large (18 point) font
- '@s' Use a small (11 point) font
- '@b' Use a **bold** font (adds FL\_BOLD to font)
- '@i' Use an *italic* font (adds FL\_ITALIC to font)
- '@f' or '@t' Use a fixed-pitch font (sets font to FL\_COURIER)
- '@c' Center the line horizontally
- '@r' Right-justify the text
- '@B0', '@B1', ... '@B255' Fill the background with `fl_color(n)`
- '@C0', '@C1', ... '@C255' Use `fl_color(n)` to draw the text
- '@F0', '@F1', ... Use `fl_font(n)` to draw the text
- '@S1', '@S2', ... Use point size `n` to draw the text
- '@u' or '@\_' Underline the text.
- '@-' draw an engraved line through the middle.

Notice that the '@.' command can be used to reliably terminate the parsing. To print a random string in a random color, use `sprintf("\@C%d\@.%s", color, string)` and it will work even if the string starts with a digit or has the format character in it.

Referenced by `item_draw()`, and `item_height()`.

**30.6.3.11 int Fl\_Browser::full\_height () const [protected, virtual]**

This method may be provided by the subclass to indicate the full height of the item list in pixels.

The default implementation computes the full height from the item heights.

Reimplemented from [Fl\\_Browser\\_](#).

Referenced by [lineposition\(\)](#).

**30.6.3.12 void Fl\_Browser::hide () [inline]**

Makes a widget invisible.

**See also:**

[show\(\)](#), [visible\(\)](#), [visible\\_r\(\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::hide\(\)](#).

Referenced by [display\(\)](#).

**30.6.3.13 void Fl\_Browser::hide (int *line*)**

Makes line n invisible, preventing selection by the user.

The line can still be selected under program control.

References [Fl\\_Browser\\_::displayed\(\)](#), [find\\_line\(\)](#), [item\\_height\(\)](#), and [Fl\\_Widget::redraw\(\)](#).

**30.6.3.14 int Fl\_Browser::incr\_height () const [protected, virtual]**

This method may be provided to return the average height of all items, to be used for scrolling.

The default implementation uses the height of the first item.

Reimplemented from [Fl\\_Browser\\_](#).

References [Fl\\_Browser\\_::textsize\(\)](#).

**30.6.3.15 void Fl\_Browser::insert (int *line*, const char \* *newtext*, void \* *d* = 0)**

Insert a new entry *before* given line.

**Parameters:**

← *line* if *line* > [size\(\)](#), the entry will be added at the end.

← *newtext* text entry for the new line.

← *d* pointer to data associated with the new line.

References [insert\(\)](#).

**30.6.3.16 void Fl\_Browser::insert (int *line*, FL\_BLINE \**t*) [protected]**

Insert a new line *t* before line *n*.

If *n* > [size\(\)](#) then the line is added to the end.

References [find\\_line\(\)](#), [Fl\\_Browser\\_::inserting\(\)](#), [item\\_height\(\)](#), and [Fl\\_Browser\\_::redraw\\_line\(\)](#).

Referenced by [add\(\)](#), [insert\(\)](#), [Fl\\_File\\_Browser::load\(\)](#), and [move\(\)](#).

**30.6.3.17 void \* Fl\_Browser::item\_first () const [protected, virtual]**

This method must be provided by the subclass to return the first item in the list.

Implements [Fl\\_Browser\\_](#).

**30.6.3.18 void \* Fl\_Browser::item\_next (void \*) const [protected, virtual]**

This method must be provided by the subclass to return the item in the list after *p*.

Implements [Fl\\_Browser\\_](#).

**30.6.3.19 void \* Fl\_Browser::item\_prev (void \*) const [protected, virtual]**

This method must be provided by the subclass to return the item in the list before *p*.

Implements [Fl\\_Browser\\_](#).

**30.6.3.20 void Fl\_Browser::item\_select (void \*, int) [protected, virtual]**

This method must be implemented by the subclass if it supports multiple selections in the browser.

The *s* argument specifies the selection state for item *p*: 0 = off, 1 = on.

Reimplemented from [Fl\\_Browser\\_](#).

References [Fl\\_Widget::flags\(\)](#).

**30.6.3.21 int Fl\_Browser::item\_selected (void \**I*) const [protected, virtual]**

This method must be implemented by the subclass if it supports multiple selections in the browser.

The method should return 1 if *p* is selected and 0 otherwise.

Reimplemented from [Fl\\_Browser\\_](#).

**30.6.3.22 int Fl\_Browser::item\_width (void \*) const [protected, virtual]**

This method must be provided by the subclass to return the width of the item *p* in pixels.

Allow for two additional pixels for the list selection box.

Implements [Fl\\_Browser\\_](#).

References [column\\_char\(\)](#), [column\\_widths\(\)](#), [FL\\_BOLD](#), [FL\\_COURIER](#), [FL\\_ITALIC](#), [Fl\\_Browser\\_::textfont\(\)](#), and [Fl\\_Browser\\_::textsize\(\)](#).

**30.6.3.23 void Fl\_Browser::lineposition (int *line*, Fl\_Line\_Position *pos*)**

Update browser so that line is shown at given position.

**Parameters:**

- ← *line* line number.
- ← *pos* position.

References Fl\_Browser\_::bbox(), full\_height(), item\_height(), and Fl\_Browser\_::position().

**30.6.3.24 int Fl\_Browser::load (const char \**filename*)**

Clears the browser and reads the file, adding each line from the file to the browser.

If the filename is NULL or a zero-length string then this just clears the browser. This returns zero if there was any error in opening or reading the file, in which case errno is set to the system error. The [data\(\)](#) of each line is set to NULL.

References clear().

**30.6.3.25 void Fl\_Browser::make\_visible (int *n*) [inline]**

Redisplays so that line n is visible.

If n is out of range, redisplay top or bottom of list as appropriate.

References Fl\_Browser\_::display().

**30.6.3.26 void Fl\_Browser::middleline (int *l*) [inline]**

Scrolls the browser so the middle line in the browser is n.

**30.6.3.27 void Fl\_Browser::replace (int *a*, const char \**b*) [inline]**

For back compatibility only.

**30.6.3.28 int Fl\_Browser::select (int *line*, int *v* = 1)**

Sets the selection state of entry.

**Parameters:**

- ← *line* line number.
- ← *v* new selection state.

**Returns:**

1 if the state changed, 0 if not.

References find\_line().

Referenced by Fl\_File\_Chooser::rescan\_keep\_filename(), and Fl\_File\_Chooser::value().

**30.6.3.29 int Fl\_Browser::selected (int *line*) const**

Return 1 if line n is selected, 0 if it not selected.

References [find\\_line\(\)](#).

Referenced by [Fl\\_File\\_Chooser::count\(\)](#), and [Fl\\_File\\_Chooser::value\(\)](#).

**30.6.3.30 void Fl\_Browser::show () [inline]**

Makes a widget visible.

An invisible widget never gets redrawn and does not get events. The [visible\(\)](#) method returns true if the widget is set to be visible. The [visible\\_r\(\)](#) method returns true if the widget and all of its parents are visible. A widget is only visible if [visible\(\)](#) is true on it *and all of its parents*.

Changing it will send FL\_SHOW or FL\_HIDE events to the widget. *Do not change it if the parent is not visible, as this will send false FL\_SHOW or FL\_HIDE events to the widget.* [redraw\(\)](#) is called if necessary on this or the parent.

**See also:**

[hide\(\)](#), [visible\(\)](#), [visible\\_r\(\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::show\(\)](#).

Referenced by [display\(\)](#).

**30.6.3.31 void Fl\_Browser::show (int *line*)**

Makes line n visible for selection.

References [Fl\\_Browser::displayed\(\)](#), [find\\_line\(\)](#), [item\\_height\(\)](#), and [Fl\\_Widget::redraw\(\)](#).

**30.6.3.32 void Fl\_Browser::size (int *W*, int *H*) [inline]**

Change the size of the widget.

[size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

**Parameters:**

← *W,H* new size

**See also:**

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::size\(\)](#).

**30.6.3.33 int Fl\_Browser::size () const [inline]**

Returns how many lines are in the browser.

The last line number is equal to this.

Referenced by Fl\_File\_Chooser::count(), Fl\_File\_Chooser::rescan\_keep\_filename(), and Fl\_File\_Chooser::value().

#### 30.6.3.34 void Fl\_Browser::swap (int *ai*, int *bi*)

Swaps two lines in the browser.

References find\_line(), and swap().

#### 30.6.3.35 void Fl\_Browser::text (int *line*, const char \* *newtext*)

Sets the text for line *line* to text *newtext*.

Does nothing if *line* is out of range.

References find\_line(), Fl\_Browser\_::redraw\_line(), and Fl\_Browser\_::replacing().

#### 30.6.3.36 void Fl\_Browser::topline (int *l*) [inline]

Scrolls the browser so the top line in the browser is *n*.

#### 30.6.3.37 int Fl\_Browser::topline () const

Returns the current top line in the browser.

If there is no vertical scrollbar then this will always return 1.

References lineno(), and Fl\_Browser\_::top().

Referenced by Fl\_File\_Chooser::rescan\_keep\_filename(), and Fl\_File\_Chooser::value().

#### 30.6.3.38 void Fl\_Browser::value (int *v*) [inline]

Sets the browser's value, i.e.

selected line, to *v*

References Fl\_Browser\_::select().

#### 30.6.3.39 int Fl\_Browser::value () const

Gets browser value.

##### Returns:

line number of current selection, or 0 if no selection.

References lineno(), and Fl\_Browser\_::selection().

The documentation for this class was generated from the following files:


- [Fl\\_Browser.H](#)
- [Fl\\_Browser.cxx](#)
- [Fl\\_Browser\\_load.cxx](#)

## 30.7 Fl\_Browser\_ Class Reference

This is the base for browsers.

```
#include <Fl_Browser_.h>
```

Inheritance diagram for Fl\_Browser\_::

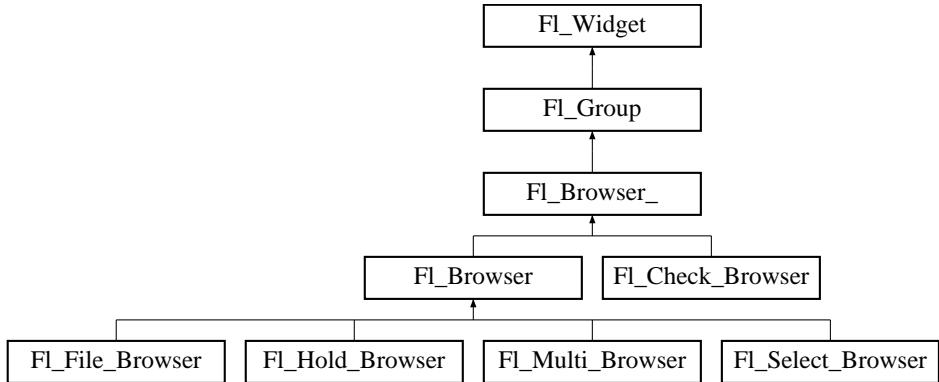

### Public Types

- enum {
 **HORIZONTAL** = 1, **VERTICAL** = 2, **BOTH** = 3, **ALWAYS\_ON** = 4,  
**HORIZONTAL\_ALWAYS** = 5, **VERTICAL\_ALWAYS** = 6, **BOTH\_ALWAYS** = 7 }

### Public Member Functions

- int **handle** (int)  
*Handles an event within the normal widget bounding box.*
- void **resize** (int, int, int, int)  
*Repositions and/or resizes the browser.*
- int **select** (void \*, int=1, int docallbacks=0)  
*Sets the selection state of item p to s and returns 1 if the state changed or 0 if it did not.*
- int **select\_only** (void \*, int docallbacks=0)  
*Selects item p and returns 1 if the state changed or 0 if it did not.*
- int **deselect** (int docallbacks=0)  
*Deselects all items in the list and returns 1 if the state changed or 0 if it did not.*
- int **position** () const  
*Gets or sets the vertical scrolling position of the list, which is the pixel offset of the list items within the list area.*
- int **hposition** () const

*Gets or sets the horizontal scrolling position of the list, which is the pixel offset of the list items within the list area.*

- void **position** (int)

*Gets or sets the vertical scrolling position of the list, which is the pixel offset of the list items within the list area.*

- void **hposition** (int)

*Gets or sets the horizontal scrolling position of the list, which is the pixel offset of the list items within the list area.*

- void **display** (void \*)

*Displays item p, scrolling the list as necessary.*

- uchar **has\_scrollbar** () const

*See [Fl\\_Browser\\_::has\\_scrollbar\(uchar\)](#).*

- void **has\_scrollbar** (uchar i)

*By default you can scroll in both directions, and the scrollbars disappear if the data will fit in the widget.*

- **Fl\_Font textfont** () const

*Gets the default text font for the lines in the browser.*

- void **textfont** (Fl\_Font s)

*Sets the default text font to font s.*

- **Fl\_Fontsize textsize** () const

*Gets the default text size for the lines in the browser.*

- void **textsize** (Fl\_Fontsize s)

*Sets the default text size to size s.*

- **Fl\_Color textcolor** () const

*Gets the default text color for the lines in the browser.*

- void **textcolor** (unsigned n)

*Sets the default text color to color n.*

- void **scrollbar\_right** ()

*Moves the vertical scrollbar to the righthand side of the list.*

- void **scrollbar\_left** ()

*Moves the vertical scrollbar to the lefthand side of the list.*

## Static Public Member Functions

- static int **scrollbar\_width** ()

*Gets the width of any scrollbars that are used.*

- static void `scrollbar_width` (int b)  
*Sets the width of any scrollbars that are used to b.*

## Public Attributes

- `Fl_Scrollbar scrollbar`  
*Vertical scrollbar.*
- `Fl_Scrollbar h-scrollbar`  
*Horizontal scrollbar.*

## Protected Member Functions

- virtual void \* `item_first` () const =0  
*This method must be provided by the subclass to return the first item in the list.*
- virtual void \* `item_next` (void \*) const =0  
*This method must be provided by the subclass to return the item in the list after p.*
- virtual void \* `item_prev` (void \*) const =0  
*This method must be provided by the subclass to return the item in the list before p.*
- virtual int `item_height` (void \*) const =0  
*This method must be provided by the subclass to return the height of the item p in pixels.*
- virtual int `item_width` (void \*) const =0  
*This method must be provided by the subclass to return the width of the item p in pixels.*
- virtual int `item_quick_height` (void \*) const  
*This method may be provided by the subclass to return the height of the item p in pixels.*
- virtual void `item_draw` (void \*, int, int, int, int) const =0  
*This method must be provided by the subclass to draw the item p in the area indicated by x, y, w, and h.*
- virtual int `full_width` () const  
*This method may be provided by the subclass to indicate the full width of the item list in pixels.*
- virtual int `full_height` () const  
*This method may be provided by the subclass to indicate the full height of the item list in pixels.*
- virtual int `incr_height` () const  
*This method may be provided to return the average height of all items, to be used for scrolling.*
- virtual void `item_select` (void \*, int=1)  
*This method must be implemented by the subclass if it supports multiple selections in the browser.*
- virtual int `item_selected` (void \*) const

*This method must be implemented by the subclass if it supports multiple selections in the browser.*

- **void \* top () const**  
*Returns the item the appears at the top of the list.*
- **void \* selection () const**  
*Returns the item currently selected, or NULL if there is no selection.*
- **void new\_list ()**  
*This method should be called when the list data is completely replaced or cleared.*
- **void deleting (void \*a)**  
*This method should be used when an item is deleted from the list.*
- **void replacing (void \*a, void \*b)**  
*This method should be used when an item is replaced in the list.*
- **void swapping (void \*a, void \*b)**  
*Exchange pointers a and b.*
- **void inserting (void \*a, void \*b)**  
*This method should be used when an item is added to the list.*
- **int displayed (void \*) const**  
*This method returns non-zero if item p is currently visible in the list.*
- **void redraw\_line (void \*)**  
*This method should be called when the contents of an item have changed but not changed the height of the item.*
- **void redraw\_lines ()**  
*This method will cause the entire list to be redrawn.*
- **void bbox (int &, int &, int &, int &) const**  
*This method returns the bounding box for the interior of the list, inside the scrollbars.*
- **int leftedge () const**  
*This method returns the X position of the left edge of the list area after adjusting for the scrollbar and border, if any.*
- **void \* find\_item (int my)**  
*This method returns the item under mouse at my.*
- **void draw (int, int, int, int)**  
*Draws the contents of the browser within the specified bounding box.*
- **void draw ()**  
*Draws the list within the normal widget bounding box.*
- **Fl\_Browser\_ (int, int, int, int, const char \*=0)**  
*The constructor makes an empty browser.*

### 30.7.1 Detailed Description

This is the base for browsers.

To be useful it must be subclassed and several virtual functions defined. The Forms-compatible browser and the file chooser's browser are subclassed off of this.

This has been designed so that the subclass has complete control over the storage of the data, although because next() and prev() functions are used to index, it works best as a linked list or as a large block of characters in which the line breaks must be searched for.

A great deal of work has been done so that the "height" of a data object does not need to be determined until it is drawn. This is useful if actually figuring out the size of an object requires accessing image data or doing stat() on a file or doing some other slow operation.

### 30.7.2 Constructor & Destructor Documentation

#### 30.7.2.1 **Fl\_Browser\_::Fl\_Browser\_ (int X, int Y, int W, int H, const char \* l = 0)** [protected]

The constructor makes an empty browser.

References Fl\_Widget::align(), Fl\_Widget::bbox(), Fl\_Widget::callback(), Fl\_Widget::color(), Fl\_Group::end(), FL\_ALIGN\_BOTTOM, FL\_BACKGROUND2\_COLOR, FL\_FOREGROUND\_COLOR, FL\_HELVETICA, FL\_HORIZONTAL, FL\_NO\_BOX, FL\_NORMAL\_SIZE, FL\_SELECTION\_COLOR, FL\_WHEN\_RELEASE\_ALWAYS, hscrollbar, scrollbar, Fl\_Widget::type(), and Fl\_Widget::when().

### 30.7.3 Member Function Documentation

#### 30.7.3.1 **void Fl\_Browser\_::deleting (void \* l)** [protected]

This method should be used when an item is deleted from the list.

It allows the [Fl\\_Browser\\_](#) to discard any cached data it has on the item.

References displayed(), item\_next(), item\_prev(), and redraw\_lines().

Referenced by Fl\_Browser::\_remove(), and Fl\_Check\_Browser::remove().

#### 30.7.3.2 **int Fl\_Browser\_::deselect (int docallbacks = 0)**

Deselects all items in the list and returns 1 if the state changed or 0 if it did not.

If docb is non-zero, deselect tries to call the callback function for the widget.

References FL\_MULTI\_BROWSER, item\_first(), item\_next(), item\_select(), redraw\_line(), select(), and Fl\_Widget::type().

Referenced by Fl\_Check\_Browser::handle(), handle(), select\_only(), and Fl\_File\_Chooser::value().

#### 30.7.3.3 **void Fl\_Browser\_::display (void \* p)**

Displays item p, scrolling the list as necessary.

References bbox(), item\_first(), item\_next(), item\_prev(), item\_quick\_height(), and position().

Referenced by handle(), Fl\_Browser::make\_visible(), select(), and select\_only().

#### 30.7.3.4 void Fl\_Browser\_::draw (int, int, int, int) [protected]

Draws the contents of the browser within the specified bounding box.

##### **Todo**

Find the implementation, if any, and document it there!

#### 30.7.3.5 void \* Fl\_Browser\_::find\_item (int my) [protected]

This method returns the item under mouse at my.

If no item is displayed at that position then NULL is returned.

References bbox(), item\_height(), and item\_next().

Referenced by handle().

#### 30.7.3.6 int Fl\_Browser\_::full\_height () const [protected, virtual]

This method may be provided by the subclass to indicate the full height of the item list in pixels.

The default implementation computes the full height from the item heights.

Reimplemented in [Fl\\_Browser](#).

References item\_first(), item\_next(), and item\_quick\_height().

Referenced by draw(), and handle().

#### 30.7.3.7 int Fl\_Browser\_::full\_width () const [protected, virtual]

This method may be provided by the subclass to indicate the full width of the item list in pixels.

The default implementation computes the full width from the item widths.

Referenced by draw().

#### 30.7.3.8 int Fl\_Browser\_::handle (int event) [virtual]

Handles an event within the normal widget bounding box.

Reimplemented from [Fl\\_Group](#).

Reimplemented in [Fl\\_Check\\_Browser](#).

References bbox(), deselect(), display(), Fl\_Widget::do\_callback(), Fl::event\_clicks(), Fl::event\_inside(), Fl::event\_key(), Fl::event\_state(), Fl::event\_x(), Fl::event\_y(), find\_item(), FL\_CTRL, FL\_Down, FL\_DRAG, FL\_Enter, FL\_ENTER, FL\_FOCUS, FL\_HOLD\_BROWSER, FL\_KEYBOARD, FL\_KP\_Enter, FL\_LEAVE, FL\_MULTI\_BROWSER, FL\_NORMAL\_BROWSER, FL\_PUSH, FL\_RELEASE, FL\_SELECT\_BROWSER, FL\_SHIFT, FL\_UNFOCUS, FL\_Up, FL\_WHEN\_CHANGED, FL\_WHEN\_ENTER\_KEY, FL\_WHEN\_NOT\_CHANGED, FL\_WHEN\_RELEASE, Fl\_Group::focus(), full\_height(), Fl\_Group::handle(), item\_first(), item\_height(), item\_next(), item\_prev(), item\_selected(), position(), Fl\_Widget::redraw(), redraw\_line(), select(), select\_only(), Fl\_Widget::set\_changed(), Fl\_Widget::type(), Fl::visible\_focus(), Fl\_Widget::w(), Fl\_Widget::when(), and Fl\_Widget::x().

**30.7.3.9 void Fl\_Browser\_::has\_scrollbar (uchar *i*) [inline]**

By default you can scroll in both directions, and the scrollbars disappear if the data will fit in the widget. [has\\_scrollbar\(\)](#) changes this based on the value of *h*:

- 0 - No scrollbars.
- Fl\_Browser\_::HORIZONTAL - Only a horizontal scrollbar.
- Fl\_Browser\_::VERTICAL - Only a vertical scrollbar.
- Fl\_Browser\_::BOTH - The default is both scrollbars.
- Fl\_Browser\_::HORIZONTAL\_ALWAYS - Horizontal scrollbar always on, vertical always off.
- Fl\_Browser\_::VERTICAL\_ALWAYS - Vertical scrollbar always on, horizontal always off.
- Fl\_Browser\_::BOTH\_ALWAYS - Both always on.

**30.7.3.10 int Fl\_Browser\_::incr\_height () const [protected, virtual]**

This method may be provided to return the average height of all items, to be used for scrolling.

The default implementation uses the height of the first item.

Reimplemented in [Fl\\_Browser](#).

References [item\\_first\(\)](#), and [item\\_quick\\_height\(\)](#).

**30.7.3.11 void Fl\_Browser\_::inserting (void \* *a*, void \* *b*) [protected]**

This method should be used when an item is added to the list.

It allows the [Fl\\_Browser](#) to update its cache data as needed.

References [displayed\(\)](#), and [redraw\\_lines\(\)](#).

Referenced by [Fl\\_Browser::insert\(\)](#).

**30.7.3.12 virtual void\* Fl\_Browser\_::item\_first () const [protected, pure virtual]**

This method must be provided by the subclass to return the first item in the list.

Implemented in [Fl\\_Browser](#).

Referenced by [deselect\(\)](#), [display\(\)](#), [draw\(\)](#), [full\\_height\(\)](#), [handle\(\)](#), [incr\\_height\(\)](#), and [select\\_only\(\)](#).

**30.7.3.13 virtual int Fl\_Browser\_::item\_height (void \*) const [protected, pure virtual]**

This method must be provided by the subclass to return the height of the item *p* in pixels.

Allow for two additional pixels for the list selection box.

Implemented in [Fl\\_Browser](#).

Referenced by [displayed\(\)](#), [draw\(\)](#), [find\\_item\(\)](#), [handle\(\)](#), and [item\\_quick\\_height\(\)](#).

**30.7.3.14 virtual void\* Fl\_Browser\_::item\_next (void \*) const [protected, pure virtual]**

This method must be provided by the subclass to return the item in the list after p.

Implemented in [Fl\\_Browser](#).

Referenced by [deleting\(\)](#), [deselect\(\)](#), [display\(\)](#), [displayed\(\)](#), [draw\(\)](#), [find\\_item\(\)](#), [full\\_height\(\)](#), [handle\(\)](#), and [select\\_only\(\)](#).

**30.7.3.15 virtual void\* Fl\_Browser\_::item\_prev (void \*) const [protected, pure virtual]**

This method must be provided by the subclass to return the item in the list before p.

Implemented in [Fl\\_Browser](#).

Referenced by [deleting\(\)](#), [display\(\)](#), and [handle\(\)](#).

**30.7.3.16 int Fl\_Browser\_::item\_quick\_height (void \* l) const [protected, virtual]**

This method may be provided by the subclass to return the height of the item p in pixels.

Allow for two additional pixels for the list selection box. This method differs from [item\\_height](#) in that it is only called for selection and scrolling operations. The default implementation calls [item\\_height](#).

References [item\\_height\(\)](#).

Referenced by [display\(\)](#), [draw\(\)](#), [full\\_height\(\)](#), and [incr\\_height\(\)](#).

**30.7.3.17 void Fl\_Browser\_::item\_select (void \*, int = 1) [protected, virtual]**

This method must be implemented by the subclass if it supports multiple selections in the browser.

The s argument specifies the selection state for item p: 0 = off, 1 = on.

Reimplemented in [Fl\\_Browser](#).

Referenced by [deselect\(\)](#), and [select\(\)](#).

**30.7.3.18 int Fl\_Browser\_::item\_selected (void \* l) const [protected, virtual]**

This method must be implemented by the subclass if it supports multiple selections in the browser.

The method should return 1 if p is selected and 0 otherwise.

Reimplemented in [Fl\\_Browser](#).

Referenced by [draw\(\)](#), [handle\(\)](#), and [select\(\)](#).

**30.7.3.19 virtual int Fl\_Browser\_::item\_width (void \*) const [protected, pure virtual]**

This method must be provided by the subclass to return the width of the item p in pixels.

Allow for two additional pixels for the list selection box.

Implemented in [Fl\\_Browser](#).

Referenced by [draw\(\)](#).

**30.7.3.20 void Fl\_Browser\_::new\_list () [protected]**

This method should be called when the list data is completely replaced or cleared.

It informs the [Fl\\_Browser\\_](#) widget that any cached information it has concerning the items is invalid.

References [redraw\\_lines\(\)](#).

Referenced by [Fl\\_Check\\_Browser::clear\(\)](#), and [Fl\\_Browser::clear\(\)](#).

**30.7.3.21 void Fl\_Browser\_::redraw\_lines () [inline, protected]**

This method will cause the entire list to be redrawn.

Referenced by [deleting\(\)](#), [hposition\(\)](#), [inserting\(\)](#), [new\\_list\(\)](#), and [position\(\)](#).

**30.7.3.22 void Fl\_Browser\_::replacing (void \* a, void \* b) [protected]**

This method should be used when an item is replaced in the list.

It allows the [Fl\\_Browser\\_](#) to update its cache data as needed.

References [redraw\\_line\(\)](#).

Referenced by [Fl\\_Browser::text\(\)](#).

**30.7.3.23 void Fl\_Browser\_::resize (int X, int Y, int W, int H) [virtual]**

Repositions and/or resizes the browser.

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Widget::align\(\)](#), [bbox\(\)](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_ALIGN\\_TOP](#), [hscrollbar](#), [Fl\\_Widget::resize\(\)](#), and [scrollbar](#).

Referenced by [Fl\\_File\\_Chooser::preview\(\)](#).

**30.7.3.24 void Fl\_Browser\_::scrollbar\_left () [inline]**

Moves the vertical scrollbar to the lefthand side of the list.

For back compatibility.

References [Fl\\_Widget::align\(\)](#), and [FL\\_ALIGN\\_LEFT](#).

**30.7.3.25 void Fl\_Browser\_::scrollbar\_right () [inline]**

Moves the vertical scrollbar to the righthand side of the list.

For back compatibility.

References [Fl\\_Widget::align\(\)](#), and [FL\\_ALIGN\\_RIGHT](#).

**30.7.3.26 int Fl\_Browser\_::select (void \* l, int i = 1, int docallbacks = 0)**

Sets the selection state of item p to s and returns 1 if the state changed or 0 if it did not.

If docb is non-zero, select tries to call the callback function for the widget.

References display(), Fl\_Widget::do\_callback(), FL\_MULTI\_BROWSER, item\_select(), item\_selected(), redraw\_line(), Fl\_Widget::set\_changed(), and Fl\_Widget::type().

Referenced by deselect(), handle(), select\_only(), and Fl\_Browser::value().

#### 30.7.3.27 int Fl\_Browser\_::select\_only (void \* l, int docallbacks = 0)

Selects item p and returns 1 if the state changed or 0 if it did not.

Any other items in the list are deselected.

If docb is non-zero, select\_only tries to call the callback function for the widget.

References deselect(), display(), FL\_MULTI\_BROWSER, item\_first(), item\_next(), select(), and Fl\_Widget::type().

Referenced by handle().

#### 30.7.3.28 void\* Fl\_Browser\_::selection () const [inline, protected]

Returns the item currently selected, or NULL if there is no selection.

For multiple selection browsers this call returns the currently focused item, even if it is not selected. To find all selected items, call

[Fl\\_Multi\\_Browser::selected\(\)](#) for every item in question.

Referenced by Fl\_Check\_Browser::value(), and Fl\_Browser::value().

#### 30.7.3.29 void\* Fl\_Browser\_::top () const [inline, protected]

Returns the item that appears at the top of the list.

Referenced by draw(), and Fl\_Browser::topline().

### 30.7.4 Member Data Documentation

#### 30.7.4.1 Fl\_Scrollbar Fl\_Browser\_::scrollbar

Vertical scrollbar.

Referenced by bbox(), draw(), Fl\_Browser\_(), and resize().

The documentation for this class was generated from the following files:


- [Fl\\_Browser\\_.H](#)
- [Fl\\_Browser\\_.cxx](#)

## 30.8 Fl\_Button Class Reference

Buttons generate callbacks when they are clicked by the user.

```
#include <Fl_Button.h>
```

Inheritance diagram for Fl\_Button::

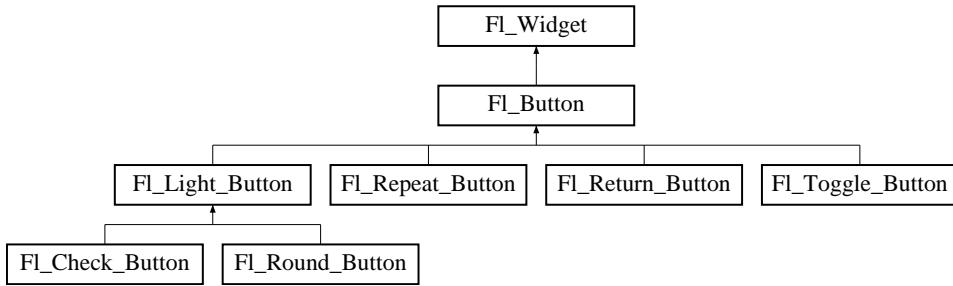

### Public Member Functions

- virtual int **handle** (int)
 

*Handles the specified event.*
- **Fl\_Button** (int X, int Y, int W, int H, const char \*L=0)
 

*The constructor creates the button using the given position, size and label.*
- int **value** (int v)
 

*Sets the current value of the button.*
- char **value** () const
 

*Returns the current value of the button (0 or 1).*
- int **set** ()
 

*Same as value(1).*
- int **clear** ()
 

*Same as value(0).*
- void **setonly** ()
 

*Turns on this button and turns off all other radio buttons in the group (calling value(1) or set() does not do this).*
- int **shortcut** () const
 

*Returns the current shortcut key for the button.*
- void **shortcut** (int s)
 

*Sets the shortcut key to s.*
- **Fl\_Boxtype** **down\_box** () const
 

*Returns the current down box type, which is drawn when value() is non-zero.*

- void [down\\_box \(Fl\\_Boxtype b\)](#)

*Sets the down box type.*

- void [shortcut \(const char \\*s\)](#)

*(for backwards compatibility)*

- [Fl\\_Color down\\_color \(\) const](#)

*(for backwards compatibility)*

- void [down\\_color \(unsigned c\)](#)

*(for backwards compatibility)*

## Protected Member Functions

- virtual void [draw \(\)](#)

*Draw the widget.*

### 30.8.1 Detailed Description

Buttons generate callbacks when they are clicked by the user.

You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#). Buttons can also generate callbacks in response to [FL\\_SHORTCUT](#) events. The button can either have an explicit [shortcut\(int s\)](#) value or a letter shortcut can be indicated in the [label\(\)](#) with an '&' character before it. For the label shortcut it does not matter if [Alt](#) is held down, but if you have an input field in the same window, the user will have to hold down the [Alt](#) key so that the input field does not eat the event first as an [FL\\_KEYBOARD](#) event.

#### [Todo](#)

Refactor the doxygen comments for [Fl\\_Button type\(\)](#) documentation.

For an [Fl\\_Button](#) object, the [type\(\)](#) call returns one of:

- [FL\\_NORMAL\\_BUTTON](#) (0): [value\(\)](#) remains unchanged after button press.
- [FL\\_TOGGLE\\_BUTTON](#): [value\(\)](#) is inverted after button press.
- [FL\\_RADIO\\_BUTTON](#): [value\(\)](#) is set to 1 after button press, and all other buttons in the current group with [type \(\) == FL\\_RADIO\\_BUTTON](#) are set to zero.

#### [Todo](#)

Refactor the doxygen comments for [Fl\\_Button when\(\)](#) documentation.

For an [Fl\\_Button](#) object, the following [when\(\)](#) values are useful, the default being [FL\\_WHEN\\_RELEASE](#):

- 0: The callback is not done, instead [changed\(\)](#) is turned on.
- [FL\\_WHEN\\_RELEASE](#) : The callback is done after the user successfully clicks the button, or when a shortcut is typed.
- [FL\\_WHEN\\_CHANGED](#) : The callback is done each time the [value\(\)](#) changes (when the user pushes and releases the button, and as the mouse is dragged around in and out of the button).

## 30.8.2 Constructor & Destructor Documentation

### 30.8.2.1 `Fl_Button::Fl_Button (int X, int Y, int W, int H, const char * L = 0)`

The constructor creates the button using the given position, size and label.

**Parameters:**

- ←  $X, Y, W, H$  position and size of the widget
- ←  $L$  widget label, default is no label

References `Fl_Widget::box()`, `down_box()`, `FL_NO_BOX`, `FL_UP_BOX`, `Fl_Widget::set_flag()`, and `Fl_Widget::SHORTCUT_LABEL`.

## 30.8.3 Member Function Documentation

### 30.8.3.1 `int Fl_Button::clear () [inline]`

Same as `value(0)`.

**See also:**

[value\(int v\)](#)

### 30.8.3.2 `void Fl_Button::down_box (Fl_Boxtype b) [inline]`

Sets the down box type.

The default value of 0 causes FLTK to figure out the correct matching down version of `box()`.

**Parameters:**

- ←  $b$  down box type

### 30.8.3.3 `Fl_Boxtype Fl_Button::down_box () const [inline]`

Returns the current down box type, which is drawn when [value\(\)](#) is non-zero.

**Return values:**

*Fl\_Boxtype*

Referenced by `Fl_Return_Button::draw()`, `Fl_Light_Button::draw()`, `draw()`, `Fl_Button()`, `Fl_Check_Button::Fl_Check_Button()`, `Fl_File_Chooser::Fl_File_Chooser()`, and `Fl_Round_Button::Fl_Round_Button()`.

### 30.8.3.4 `void Fl_Button::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

Reimplemented in [Fl\\_Light\\_Button](#), and [Fl\\_Return\\_Button](#).

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::color\(\)](#), [down\\_box\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Widget::draw\\_focus\(\)](#), [Fl\\_Widget::draw\\_label\(\)](#), [FL\\_HIDDEN\\_BUTTON](#), [FL\\_NORMAL\\_LABEL](#), [Fl::focus\(\)](#), [Fl\\_Widget::labelcolor\(\)](#), [Fl\\_Widget::labeltype\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [Fl\\_Widget::type\(\)](#), and [value\(\)](#).

#### 30.8.3.5 int Fl\_Button::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Light\\_Button](#), [Fl\\_Repeat\\_Button](#), and [Fl\\_Return\\_Button](#).

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::clear\\_changed\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::do\\_callback\(\)](#), [Fl::event\\_inside\(\)](#), [Fl::event\\_key\(\)](#), [Fl::event\\_state\(\)](#), [FL\\_ALT](#), [FL\\_CTRL](#), [FL\\_DRAG](#), [FL\\_ENTER](#), [FL\\_FOCUS](#), [FL\\_KEYBOARD](#), [FL\\_LEAVE](#), [FL\\_META](#), [FL\\_NO\\_BOX](#), [FL\\_PUSH](#), [FL\\_RADIO\\_BUTTON](#), [FL\\_RELEASE](#), [FL\\_SHIFT](#), [FL\\_SHORTCUT](#), [FL\\_TOGGLE\\_BUTTON](#), [FL\\_UNFOCUS](#), [FL\\_WHEN\\_CHANGED](#), [FL\\_WHEN\\_NOT\\_CHANGED](#), [FL\\_WHEN\\_RELEASE](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::redraw\(\)](#), [Fl\\_Widget::set\\_changed\(\)](#), [setonly\(\)](#), [shortcut\(\)](#), [Fl\\_Widget::test\\_shortcut\(\)](#), [Fl::test\\_shortcut\(\)](#), [Fl\\_Widget::type\(\)](#), [value\(\)](#), [Fl::visible\\_focus\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::when\(\)](#), [Fl\\_Widget::window\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.8.3.6 int Fl\_Button::set () [inline]

Same as `value(1)`.

**See also:**

[value\(int v\)](#)

### 30.8.3.7 void Fl\_Button::shortcut (int s) [inline]

Sets the shortcut key to *s*.

Setting this overrides the use of '&' in the [label\(\)](#). The value is a bitwise OR of a key and a set of shift flags, for example: `FL_ALT | 'a'`, or `FL_ALT | (FL_F + 10)`, or just `'a'`. A value of 0 disables the shortcut.

The key can be any value returned by [Fl::event\\_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event\\_state\(\)](#). If the bit is on, that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

**Parameters:**

← *s* bitwise OR of key and shift flags

### 30.8.3.8 int Fl\_Button::shortcut () const [inline]

Returns the current shortcut key for the button.

**Return values:**

*int*

Referenced by `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_Help_Dialog::Fl_Help_Dialog()`, and `handle()`.

### 30.8.3.9 int Fl\_Button::value (int v)

Sets the current value of the button.

A non-zero value sets the button to 1 (ON), and zero sets it to 0 (OFF).

**Parameters:**

← *v* button value.

**See also:**

[set\(\)](#), [clear\(\)](#)

References `Fl_Widget::box()`, `Fl_Widget::clear_changed()`, `Fl_Widget::redraw()`, and `Fl_Widget::redraw_label()`.

Referenced by `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_File_Chooser::preview()`, and `Fl_File_Chooser::rescan_keep_filename()`.

The documentation for this class was generated from the following files:

- [Fl\\_Button.H](#)
- [Fl\\_Button.cxx](#)

## 30.9 Fl\_Cairo\_State Class Reference

Contains all the necessary info on the current cairo context.

```
#include <Fl_Cairo.H>
```

### Public Member Functions

- `cairo_t * cc () const`  
*Gets the current cairo context.*
- `bool autolink () const`  
*Sets the autolink option. See [Fl::cairo\\_autolink\\_context\(bool\)](#).*
- `void cc (cairo_t *c, bool own=true)`  
*Sets the current cairo context, own indicates cc deletion is handle externally by user.*
- `void autolink (bool b)`  
*Gets the autolink option.*
- `void window (void *w)`  
*Sets the window w to keep track on.*
- `void * window () const`  
*Gets the last window attached to a cc.*
- `void * gc (void *c)`  
*Sets the gc c to keep track on.*
- `void * gc () const`  
*Gets the last gc attached to a cc.*

### 30.9.1 Detailed Description

Contains all the necessary info on the current cairo context.

A private internal & unique corresponding object is created to permit cairo context state handling while keeping it opaque. For internal use only.

#### Note:

Only available when configure has the –enable-cairo option

The documentation for this class was generated from the following file:


- [Fl\\_Cairo.H](#)

## 30.10 Fl\_Cairo\_Window Class Reference

This defines a pre-configured cairo fltk window.

```
#include <Fl_Cairo_Window.H>
```

Inheritance diagram for Fl\_Cairo\_Window::

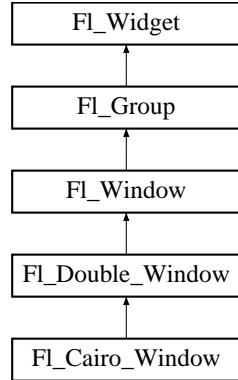

### Public Types

- `typedef void(* cairo_draw_cb )(Fl_Cairo_Window *self, cairo_t *def)`

*This defines the cairo draw callback prototype that you must further.*

### Public Member Functions

- `Fl_Cairo_Window (int w, int h)`
- `void draw ()`

*Overloaded to provide cairo callback support.*

- `void set_draw_cb (cairo_draw_cb cb)`

*You must provide a draw callback which will implement your cairo rendering, This method will permit you to set your cb cairo callback.*

### 30.10.1 Detailed Description

This defines a pre-configured cairo fltk window.

This class overloads for you the virtual `draw()` method, so that the only thing you have to do is to provide your cairo code. All cairo context handling is achieved transparently.

#### Note:

You can alternatively define your custom cairo fltk window, and thus at least override the `draw()` method to provide custom cairo support. In this case you will probably use `Fl::cairo_make_current(Fl_Window*)` to attach a context to your window. You should do it only when your window is the current window.

**See also:**

[Fl\\_Window::current\(\)](#)

The documentation for this class was generated from the following file:


- [Fl\\_Cairo\\_Window.H](#)

## 30.11 Fl\_Chart Class Reference

[Fl\\_Chart](#) displays simple charts.

```
#include <Fl_Chart.H>
```

Inheritance diagram for Fl\_Chart::



### Public Member Functions

- [Fl\\_Chart](#) (int X, int Y, int W, int H, const char \*L=0)  
*Create a new [Fl\\_Chart](#) widget using the given position, size and label string.*
- [~Fl\\_Chart](#) ()  
*Destroys the [Fl\\_Chart](#) widget and all of its data.*
- void [clear](#) ()  
*Removes all values from the chart.*
- void [add](#) (double val, const char \*str=0, unsigned col=0)  
*Add the data value val with optional label str and color col to the chart.*
- void [insert](#) (int ind, double val, const char \*str=0, unsigned col=0)  
*Inserts a data value val at the given position ind.*
- void [replace](#) (int ind, double val, const char \*str=0, unsigned col=0)  
*Replace a data value val at the given position ind.*
- void [bounds](#) (double \*a, double \*b) const  
*Gets the lower and upper bounds of the chart values.*
- void [bounds](#) (double a, double b)  
*Sets the lower and upper bounds of the chart values.*
- int [size](#) () const  
*Returns the number of data values in the chart.*
- void [size](#) (int W, int H)  
*Change the size of the widget.*
- int [maxsize](#) () const  
*Gets the maximum number of data values for a chart.*
- void [maxsize](#) (int m)

*Set the maximum number of data values for a chart.*

- **Fl\_Font textfont () const**  
*Gets the chart's text font.*
- **void textfont (Fl\_Font s)**  
*Sets the chart's text font to s.*
- **Fl\_Fontsize textSize () const**  
*Gets the chart's text size.*
- **void textSize (Fl\_Fontsize s)**  
*gets the chart's text size to s.*
- **Fl\_Color textColor () const**  
*Gets the chart's text color.*
- **void textColor (unsigned n)**  
*gets the chart's text color to n.*
- **uchar autosize () const**  
*Get whether the chart will automatically adjust the bounds of the chart.*
- **void autosize (uchar n)**  
*Set whether the chart will automatically adjust the bounds of the chart.*

## Protected Member Functions

- **void draw ()**  
*Draw the widget.*

### 30.11.1 Detailed Description

**Fl\_Chart** displays simple charts.

It is provided for Forms compatibility.

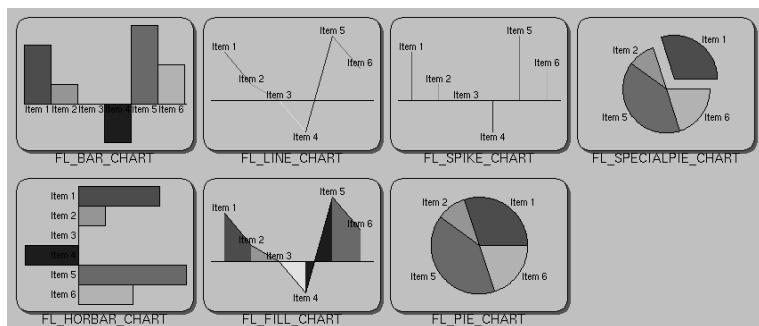


Figure 30.2: Fl\_Chart

**Todo**

Refactor `Fl_Chart::type()` information.

The type of an `Fl_Chart` object can be set using `type(uchar t)` to:

- `FL_BAR_CHART`: Each sample value is drawn as a vertical bar.
- `FL_FILLED_CHART`: The chart is filled from the bottom of the graph to the sample values.
- `FL_HORBAR_CHART`: Each sample value is drawn as a horizontal bar.
- `FL_LINE_CHART`: The chart is drawn as a polyline with vertices at each sample value.
- `FL_PIE_CHART`: A pie chart is drawn with each sample value being drawn as a proportionate slice in the circle.
- `FL_SPECIALPIE_CHART`: Like `FL_PIE_CHART`, but the first slice is separated from the pie.
- `FL_SPIKE_CHART`: Each sample value is drawn as a vertical line.

### 30.11.2 Constructor & Destructor Documentation

#### 30.11.2.1 `Fl_Chart::Fl_Chart (int X, int Y, int W, int H, const char *L = 0)`

Create a new `Fl_Chart` widget using the given position, size and label string.

The default boxstyle is `FL_NO_BOX`.

**Parameters:**

- ← `X,Y,W,H` position and size of the widget
- ← `L` widget label, default is no label

References `Fl_Widget::align()`, `Fl_Widget::box()`, `FL_ALIGN_BOTTOM`, `FL_BORDER_BOX`, `FL_CHART_MAX`, `FL_FOREGROUND_COLOR`, and `FL_HELVETICA`.

### 30.11.3 Member Function Documentation

#### 30.11.3.1 `void Fl_Chart::add (double val, const char *str = 0, unsigned col = 0)`

Add the data value `val` with optional label `str` and color `col` to the chart.

**Parameters:**

- ← `val` data value
- ← `str` optional data label
- ← `col` optional data color

References `FL_CHART_ENTRY::col`, `FL_CHART_LABEL_MAX`, `FL_CHART_MAX`, `Fl_Widget::redraw()`, `FL_CHART_ENTRY::str`, and `FL_CHART_ENTRY::val`.

**30.11.3.2 void Fl\_Chart::autosize (uchar *n*) [inline]**

Set whether the chart will automatically adjust the bounds of the chart.

**Parameters:**

← *n* non-zero to enable automatic resizing, zero to disable.

**30.11.3.3 uchar Fl\_Chart::autosize () const [inline]**

Get whether the chart will automatically adjust the bounds of the chart.

**Returns:**

non-zero if auto-sizing is enabled and zero if disabled.

Referenced by draw().

**30.11.3.4 void Fl\_Chart::bounds (double *a*, double *b*)**

Sets the lower and upper bounds of the chart values.

**Parameters:**

← *a,b* are used to set lower, upper

References Fl\_Widget::redraw().

**30.11.3.5 void Fl\_Chart::bounds (double \**a*, double \**b*) const [inline]**

Gets the lower and upper bounds of the chart values.

**Parameters:**

→ *a,b* are set to lower, upper

**30.11.3.6 void Fl\_Chart::draw () [protected, virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References autosize(), Fl\_Widget::box(), Fl::box\_dh(), Fl::box\_dw(), Fl::box\_dx(), Fl::box\_dy(), Fl\_Widget::draw\_box(), Fl\_Widget::draw\_label(), FL\_BAR\_CHART, FL\_HORBAR\_CHART, FL\_PIE\_CHART, fl\_pop\_clip(), fl\_push\_clip(), FL\_SPECIALPIE\_CHART, Fl\_Widget::h(), textcolor(), textfont(), textSize(), Fl\_Widget::type(), FL\_CHART\_ENTRY::val, Fl\_Widget::w(), Fl\_Widget::x(), and Fl\_Widget::y().

**30.11.3.7 void Fl\_Chart::insert (int *ind*, double *val*, const char \* *str* = 0, unsigned *col* = 0)**

Inserts a data value *val* at the given position *ind*.

Position 1 is the first data value.

**Parameters:**

- ← *ind* insertion position
- ← *val* data value
- ← *str* optional data label
- ← *col* optional data color

References FL\_CHART\_ENTRY::col, FL\_CHART\_LABEL\_MAX, FL\_CHART\_MAX, Fl\_Widget::redraw(), FL\_CHART\_ENTRY::str, and FL\_CHART\_ENTRY::val.

**30.11.3.8 void Fl\_Chart::maxsize (int *m*)**

Set the maximum number of data values for a chart.

If you do not call this method then the chart will be allowed to grow to any size depending on available memory.

**Parameters:**

- ← *m* maximum number of data values allowed.

References Fl\_Widget::redraw().

**30.11.3.9 void Fl\_Chart::replace (int *ind*, double *val*, const char \* *str* = 0, unsigned *col* = 0)**

Replace a data value *val* at the given position *ind*.

Position 1 is the first data value.

**Parameters:**

- ← *ind* insertion position
- ← *val* data value
- ← *str* optional data label
- ← *col* optional data color

References FL\_CHART\_ENTRY::col, FL\_CHART\_LABEL\_MAX, Fl\_Widget::redraw(), FL\_CHART\_ENTRY::str, and FL\_CHART\_ENTRY::val.

**30.11.3.10 void Fl\_Chart::size (int *W*, int *H*) [inline]**

Change the size of the widget.

*size(w,h)* is a shortcut for *resize(x0,y0,w,h)*.

**Parameters:**

- ← *W,H* new size

**See also:**

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::size\(\)](#).

**30.11.3.11 void Fl\_Chart::textcolor (unsigned n) [inline]**

gets the chart's text color to n.

**30.11.3.12 void Fl\_Chart::textfont (Fl\_Font s) [inline]**

Sets the chart's text font to s.

**30.11.3.13 void Fl\_Chart::textsize (Fl\_Fontsize s) [inline]**

gets the chart's text size to s.

The documentation for this class was generated from the following files:

- [Fl\\_Chart.H](#)
- [Fl\\_Chart.cxx](#)

## 30.12 FL\_CHART\_ENTRY Struct Reference

For internal use only.

```
#include <Fl_Chart.H>
```

### Public Attributes

- float `val`  
*For internal use only.*
- unsigned `col`  
*For internal use only.*
- char `str` [FL\_CHART\_LABEL\_MAX+1]  
*For internal use only.*

### 30.12.1 Detailed Description

For internal use only.

### 30.12.2 Member Data Documentation

#### 30.12.2.1 unsigned FL\_CHART\_ENTRY::col

For internal use only.

Referenced by Fl\_Chart::add(), Fl\_Chart::insert(), and Fl\_Chart::replace().

#### 30.12.2.2 char FL\_CHART\_ENTRY::str[FL\_CHART\_LABEL\_MAX+1]

For internal use only.

Referenced by Fl\_Chart::add(), Fl\_Chart::insert(), and Fl\_Chart::replace().

#### 30.12.2.3 float FL\_CHART\_ENTRY::val

For internal use only.

Referenced by Fl\_Chart::add(), Fl\_Chart::draw(), Fl\_Chart::insert(), and Fl\_Chart::replace().

The documentation for this struct was generated from the following file:


- [Fl\\_Chart.H](#)

## 30.13 Fl\_Check\_Browser Class Reference

The [Fl\\_Check\\_Browser](#) widget displays a scrolling list of text lines that may be selected and/or checked by the user.

```
#include <Fl_Check_Browser.h>
```

Inheritance diagram for Fl\_Check\_Browser::



### Public Member Functions

- [Fl\\_Check\\_Browser](#) (int x, int y, int w, int h, const char \*l=0)  
*The constructor makes an empty browser.*
- [~Fl\\_Check\\_Browser](#) ()  
*The destructor deletes all list items and destroys the browser.*
- int [add](#) (char \*s)  
*Add a new unchecked line to the end of the browser.*
- int [add](#) (char \*s, int b)  
*See int [Fl\\_Check\\_Browser::add\(char \\*s\)](#).*
- int [remove](#) (int item)  
*Remove line n and make the browser one line shorter.*
- int [add](#) (const char \*s)  
*See int [Fl\\_Check\\_Browser::add\(char \\*s\)](#).*
- int [add](#) (const char \*s, int b)  
*See int [Fl\\_Check\\_Browser::add\(char \\*s\)](#).*
- void [clear](#) ()  
*Remove every item from the browser.*
- int [nitems](#) () const  
*Returns how many lines are in the browser.*
- int [nchecked](#) () const  
*Returns how many items are currently checked.*

- int **checked** (int item) const  
*Gets the current status of item item.*
- void **checked** (int item, int b)  
*Sets the check status of item item to b.*
- void **set\_checked** (int item)  
*Equivalent to Fl\_Check\_Browser::checked(item, 1).*
- void **check\_all** ()  
*Sets all the items checked.*
- void **check\_none** ()  
*Sets all the items unchecked.*
- int **value** () const  
*Returns the index of the currently selected item.*
- char \* **text** (int item) const  
*Return a pointer to an internal buffer holding item item's text.*

## Protected Member Functions

- int **handle** (int)  
*Handles an event within the normal widget bounding box.*

### 30.13.1 Detailed Description

The [Fl\\_Check\\_Browser](#) widget displays a scrolling list of text lines that may be selected and/or checked by the user.

### 30.13.2 Constructor & Destructor Documentation

#### 30.13.2.1 [Fl\\_Check\\_Browser::Fl\\_Check\\_Browser](#) (int X, int Y, int W, int H, const char \* l = 0)

The constructor makes an empty browser.

References [FL\\_SELECT\\_BROWSER](#), [FL\\_WHEN\\_NEVER](#), [Fl\\_Widget::type\(\)](#), and [Fl\\_Widget::when\(\)](#).

#### 30.13.2.2 [Fl\\_Check\\_Browser::~Fl\\_Check\\_Browser](#) () [inline]

The destructor deletes all list items and destroys the browser.

References [Fl\\_Group::clear\(\)](#).

### 30.13.3 Member Function Documentation

#### 30.13.3.1 int Fl\_Check\_Browser::add (char \* s)

Add a new unchecked line to the end of the browser.

The text is copied using the strdup() function. It may also be NULL to make a blank line. The second form can set the item checked.

#### 30.13.3.2 void Fl\_Check\_Browser::check\_all ()

Sets all the items checked.

References Fl\_Widget::redraw().

#### 30.13.3.3 void Fl\_Check\_Browser::check\_none ()

Sets all the items unchecked.

References Fl\_Widget::redraw().

#### 30.13.3.4 void Fl\_Check\_Browser::checked (int i, int b)

Sets the check status of item item to b.

References Fl\_Widget::redraw().

#### 30.13.3.5 int Fl\_Check\_Browser::checked (int i) const

Gets the current status of item item.

#### 30.13.3.6 void Fl\_Check\_Browser::clear ()

Remove every item from the browser.

Reimplemented from [Fl\\_Group](#).

References Fl\_Browser\_::new\_list().

#### 30.13.3.7 int Fl\_Check\_Browser::handle (int event) [protected, virtual]

Handles an event within the normal widget bounding box.

Reimplemented from [Fl\\_Browser\\_](#).

References Fl\_Browser\_::deselect(), and FL\_PUSH.

#### 30.13.3.8 int Fl\_Check\_Browser::nchecked () const [inline]

Returns how many items are currently checked.

**30.13.3.9 int Fl\_Check\_Browser::nitems () const [inline]**

Returns how many lines are in the browser.

The last line number is equal to this.

**30.13.3.10 int Fl\_Check\_Browser::remove (int *item*)**

Remove line n and make the browser one line shorter.

Returns the number of lines left in the browser.

References Fl\_Browser\_::deleting().

**30.13.3.11 void Fl\_Check\_Browser::set\_checked (int *item*) [inline]**

Equivalent to Fl\_Check\_Browser::checked(item, 1).

**30.13.3.12 char \* Fl\_Check\_Browser::text (int *i*) const**

Return a pointer to an internal buffer holding item item's text.

**30.13.3.13 int Fl\_Check\_Browser::value () const**

Returns the index of the currently selected item.

References Fl\_Browser\_::selection().

The documentation for this class was generated from the following files:


- [Fl\\_Check\\_Browser.H](#)
- [Fl\\_Check\\_Browser.cxx](#)

## 30.14 Fl\_Check\_Button Class Reference

A button with an "checkmark" to show its status.

```
#include <Fl_Check_Button.H>
```

Inheritance diagram for Fl\_Check\_Button::



### Public Member Functions

- [Fl\\_Check\\_Button](#) (int X, int Y, int W, int H, const char \*L=0)

*Creates a new [Fl\\_Check\\_Button](#) widget using the given position, size and label string.*

### 30.14.1 Detailed Description

A button with an "checkmark" to show its status.

Figure 30.3: Fl\_Check\_Button

Buttons generate callbacks when they are clicked by the user. You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

The [Fl\\_Check\\_Button](#) subclass displays its "ON" state by showing a "checkmark" rather than drawing itself pushed in.

**Todo**

Refactor [Fl\\_Check\\_Button](#) doxygen comments (add `color()` info etc?)

**Todo**

Generate Fl\_Check\_Button.gif with visible checkmark.

### 30.14.2 Constructor & Destructor Documentation

#### 30.14.2.1 [Fl\\_Check\\_Button::Fl\\_Check\\_Button \(int X, int Y, int W, int H, const char \\*L = 0\)](#)

Creates a new [Fl\\_Check\\_Button](#) widget using the given position, size and label string.

**Parameters:**

- ← *X,Y,W,H* position and size of the widget
- ← *L* widget label, default is no label

References `Fl_Widget::box()`, `Fl_Button::down_box()`, `FL_DOWN_BOX`, `FL_FOREGROUND_COLOR`, `FL_NO_BOX`, and `Fl_Widget::selection_color()`.

The documentation for this class was generated from the following files:


- [Fl\\_Check\\_Button.H](#)
- [Fl\\_Check\\_Button.cxx](#)

## 30.15 Fl\_Choice Class Reference

A button that is used to pop up a menu.

```
#include <Fl_Choice.h>
```

Inheritance diagram for Fl\_Choice::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Choice](#) (int X, int Y, int W, int H, const char \*L=0)  
*Create a new [Fl\\_Choice](#) widget using the given position, size and label string.*
- int [value](#) () const  
*Gets the index of the last item chosen by the user.*
- int [value](#) (int v)  
*Sets the currently selected value using the index into the menu item array.*
- int [value](#) (const [Fl\\_Menu\\_Item](#) \*v)  
*Sets the currently selected value using a pointer to menu item.*

### Protected Member Functions

- void [draw](#) ()  
*Draw the widget.*

#### 30.15.1 Detailed Description

A button that is used to pop up a menu.

This is a button that, when pushed, pops up a menu (or hierarchy of menus) defined by an array of [Fl\\_Menu\\_Item](#) objects. Motif calls this an OptionButton.

The only difference between this and a [Fl\\_Menu\\_Button](#) is that the name of the most recent chosen menu item is displayed inside the box, while the label is displayed outside the box. However, since the use of this is most often to control a single variable rather than do individual callbacks, some of the [Fl\\_Menu\\_Button](#) methods are redescribed here in those terms.

When the user picks an item off the menu the `value()` is set to that item and then the item's callback is done with the `menu_button` as the `Fl_Widget*` argument. If the item does not have a callback the `menu_button`'s callback is done instead.

All three mouse buttons pop up the menu. The Forms behavior of the first two buttons to increment/decrement the choice is not implemented. This could be added with a subclass, however.

The menu will also pop up in response to shortcuts indicated by putting a '&' character in the `label()`. See `Fl_Button::shortcut(int s)` for a description of this.

Typing the `shortcut()` of any of the items will do exactly the same as when you pick the item with the mouse. The '&' character in item names are only looked at when the menu is popped up, however.

Figure 30.4: Fl\_Choice

## **Todo**

Refactor the doxygen comments for `Fl_Choice changed()` documentation.

- `int Fl_Widget::changed() const` This value is true the user picks a different value. *It is turned off by `value()` and just before doing a callback (the callback can turn it back on if desired).*
- `void Fl_Widget::set_changed()` This method sets the `changed()` flag.
- `void Fl_Widget::clear_changed()` This method clears the `changed()` flag.
- `Fl_Boxtype Fl_Choice::down_box() const` Gets the current down box, which is used when the menu is popped up. The default down box type is `FL_DOWN_BOX`.
- `void Fl_Choice::down_box(Fl_Boxtype b)` Sets the current down box type to `b`.

## **30.15.2 Constructor & Destructor Documentation**

### **30.15.2.1 Fl\_Choice::Fl\_Choice (int X, int Y, int W, int H, const char \* L = 0)**

Create a new `Fl_Choice` widget using the given position, size and label string.

The default boxtyle is `FL_UP_BOX`.

The constructor sets `menu()` to NULL. See `Fl_Menu_` for the methods to set or change the menu.

#### **Parameters:**

$\leftarrow X, Y, W, H$  position and size of the widget

← *L* widget label, default is no label

References `Fl_Widget::align()`, `Fl_Widget::box()`, `Fl_Menu_::down_box()`, `FL_ALIGN_LEFT`, `FL_BORDER_BOX`, `FL_FLAT_BOX`, `FL_HELVETICA`, `FL_WHEN_RELEASE`, `Fl_Menu_::textfont()`, and `Fl_Widget::when()`.

### 30.15.3 Member Function Documentation

#### 30.15.3.1 void Fl\_Choice::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References `Fl_Menu_Item::activate()`, `Fl_Menu_Item::active()`, `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Label::color`, `Fl_Widget::color()`, `Fl_Menu_Item::deactivate()`, `Fl_Label::deimage`, `Fl_Menu_Item::draw()`, `Fl_Label::draw()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `FL_ALIGN_LEFT`, `FL_BACKGROUND2_COLOR`, `fl_clip`, `fl_color()`, `FL_DOWN_BOX`, `fl_polygon()`, `fl_pop_clip()`, `FL_UP_BOX`, `fl_yxline()`, `Fl::focus()`, `Fl_Label::font`, `Fl_Widget::h()`, `Fl_Label::image`, `Fl_Widget::labelcolor()`, `Fl_Menu_Item::labelcolor_`, `Fl_Menu_Item::labelfont_`, `Fl_Menu_Item::labelsize_`, `Fl_Menu_Item::labeltype_`, `Fl_Menu_::mvalue()`, `Fl::scheme()`, `Fl_Label::size`, `Fl_Menu_Item::text`, `Fl_Menu_::textcolor()`, `Fl_Menu_::textfont()`, `Fl_Menu_::textsize()`, `Fl_Label::type`, `Fl_Label::value`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

#### 30.15.3.2 int Fl\_Choice::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← *event* the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References `Fl_Widget::color()`, `Fl::event_key()`, `Fl::event_state()`, `FL_ALT`, `FL_BACKGROUND2_COLOR`, `FL_CTRL`, `FL_ENTER`, `FL_FOCUS`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_META`, `FL_PUSH`, `FL_SHIFT`, `FL_SHORTCUT`, `FL_UNFOCUS`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Menu_::menu()`, `Fl_Menu_::mvalue()`, `Fl_Menu_::picked()`, `Fl_Menu_Item::pulldown()`, `Fl_Widget::redraw()`, `Fl::scheme()`, `Fl_Menu_Item::submenu()`, `Fl_Menu_Item::test_shortcut()`, `Fl_Widget::test_shortcut()`, `Fl_Menu_::text()`, `Fl::visible_focus()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.15.3.3 int Fl\_Choice::value (const Fl\_Menu\_Item \* v)

Sets the currently selected value using a pointer to menu item.

Changing the selected value causes a [redraw\(\)](#).

**Parameters:**

← `v` pointer to menu item in the menu item array.

**Returns:**

non-zero if the new value is different to the old one.

Reimplemented from [Fl\\_Menu\\_](#).

References `Fl_Widget::redraw()`, and `Fl_Menu_::value()`.

### 30.15.3.4 int Fl\_Choice::value (int v)

Sets the currently selected value using the index into the menu item array.

Changing the selected value causes a [redraw\(\)](#).

**Parameters:**

← `v` index of value in the menu item array.

**Returns:**

non-zero if the new value is different to the old one.

Reimplemented from [Fl\\_Menu\\_](#).

References `Fl_Widget::redraw()`, `Fl_Menu_::size()`, `Fl_Menu_::value()`, and `value()`.

### 30.15.3.5 int Fl\_Choice::value () const [inline]

Gets the index of the last item chosen by the user.

The index is zero initially.

Reimplemented from [Fl\\_Menu\\_](#).

References `Fl_Menu_::value()`.

Referenced by `Fl_File_Chooser::filter()`, `Fl_File_Chooser::filter_value()`, `Fl_File_Chooser::rescan_keep_filename()`, and `value()`.

The documentation for this class was generated from the following files:


- [Fl\\_Choice.H](#)
- [Fl\\_Choice.cxx](#)

## 30.16 Fl\_Clock Class Reference

This widget provides a round analog clock display.

```
#include <Fl_Clock.H>
```

Inheritance diagram for Fl\_Clock::

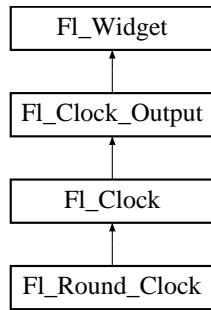

### Public Member Functions

- int [handle](#) (int)

*Handles the specified event.*

- void [update](#) ()

*Undefined.*

- [Fl\\_Clock](#) (int X, int Y, int W, int H, const char \*L=0)

*Create an [Fl\\_Clock](#) widget using the given position, size, and label string.*

- [Fl\\_Clock](#) (uchar t, int X, int Y, int W, int H, const char \*L)

*Create an [Fl\\_Clock](#) widget using the given boxtyle, position, size, and label string.*

- [~Fl\\_Clock](#) ()

*The destructor removes the clock.*

### 30.16.1 Detailed Description

This widget provides a round analog clock display.

[Fl\\_Clock](#) is provided for Forms compatibility. It installs a 1-second timeout callback using [Fl::add\\_timeout\(\)](#). You can choose the rounded or square type of the the clock with [type\(\)](#), see below.




Figure 30.5: FL\_SQUARE\_CLOCK type




Figure 30.6: FL\_ROUND\_CLOCK type

### 30.16.2 Constructor & Destructor Documentation

#### 30.16.2.1 `Fl_Clock::Fl_Clock (int X, int Y, int W, int H, const char *L = 0)`

Create an [Fl\\_Clock](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

**Parameters:**

- ← `X,Y,W,H` position and size of the widget
- ← `L` widget label, default is no label

#### 30.16.2.2 `Fl_Clock::Fl_Clock (uchar t, int X, int Y, int W, int H, const char *L)`

Create an [Fl\\_Clock](#) widget using the given boxtyle, position, size, and label string.

**Parameters:**

- ← `t` boxtyle
- ← `X,Y,W,H` position and size of the widget
- ← `L` widget label, default is no label

References `Fl_Widget::box()`, `FL_NO_BOX`, `FL_ROUND_CLOCK`, `FL_UP_BOX`, and `Fl_Widget::type()`.

### 30.16.3 Member Function Documentation

#### 30.16.3.1 int Fl\_Clock::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References [FL\\_HIDE](#), [FL\\_SHOW](#), and [Fl::remove\\_timeout\(\)](#).

#### 30.16.3.2 void Fl\_Clock::update ()

Undefined.

**Todo**

Find [Fl\\_Clock::update\(\)](#) implementation, if any, and document it.

The documentation for this class was generated from the following files:


- [Fl\\_Clock.H](#)
- [Fl\\_Clock.cxx](#)

## 30.17 Fl\_Clock\_Output Class Reference

This widget can be used to display a program-supplied time.

```
#include <Fl_Clock.H>
```

Inheritance diagram for Fl\_Clock\_Output::



### Public Member Functions

- **Fl\_Clock\_Output** (int X, int Y, int W, int H, const char \*L=0)  
*Create a new [Fl\\_Clock\\_Output](#) widget with the given position, size and label.*
- void **value** (ulong v)  
*Set the displayed time.*
- void **value** (int H, int m, int s)  
*Set the displayed time.*
- ulong **value** () const  
*Returns the displayed time.*
- int **hour** () const  
*Returns the displayed hour (0 to 23).*
- int **minute** () const  
*Returns the displayed minute (0 to 59).*
- int **second** () const  
*Returns the displayed second (0 to 60, 60=leap second).*

### Protected Member Functions

- void **draw** ()  
*Draw clock with current position and size.*
- void **draw** (int X, int Y, int W, int H)  
*Draw clock with the given position and size.*

### 30.17.1 Detailed Description

This widget can be used to display a program-supplied time.

The time shown on the clock is not updated. To display the current time, use [Fl\\_Clock](#) instead.




Figure 30.7: FL\_SQUARE\_CLOCK type




Figure 30.8: FL\_ROUND\_CLOCK type

### 30.17.2 Constructor & Destructor Documentation

#### 30.17.2.1 [Fl\\_Clock\\_Output::Fl\\_Clock\\_Output](#) (int *X*, int *Y*, int *W*, int *H*, const char \* *L* = 0)

Create a new [Fl\\_Clock\\_Output](#) widget with the given position, size and label.

The default boxtyle is [FL\\_NO\\_BOX](#).

##### Parameters:

$\leftarrow X, Y, W, H$  position and size of the widget

$\leftarrow L$  widget label, default is no label

References [Fl\\_Widget::align\(\)](#), [Fl\\_Widget::box\(\)](#), [FL\\_ALIGN\\_BOTTOM](#), [FL\\_UP\\_BOX](#), and [Fl\\_Widget::selection\\_color\(\)](#).

### 30.17.3 Member Function Documentation

#### 30.17.3.1 void Fl\_Clock\_Output::draw (int X, int Y, int W, int H) [protected]

Draw clock with the given position and size.

**Parameters:**

$\leftarrow X, Y, W, H$  position and size

References Fl\_Widget::active\_r(), Fl\_Widget::box(), Fl\_Widget::color(), Fl\_Widget::draw\_box(), fl\_begin\_loop(), fl\_begin\_polygon(), fl\_circle(), fl\_color(), fl\_end\_loop(), fl\_end\_polygon(), FL\_FOREGROUND\_COLOR, fl\_pop\_matrix(), fl\_push\_matrix(), fl\_rotate(), FL\_ROUND\_CLOCK, fl\_scale(), fl\_translate(), Fl\_Widget::selection\_color(), and Fl\_Widget::type().

#### 30.17.3.2 int Fl\_Clock\_Output::hour () const [inline]

Returns the displayed hour (0 to 23).

**See also:**

[value\(\)](#), [minute\(\)](#), [second\(\)](#)

#### 30.17.3.3 int Fl\_Clock\_Output::minute () const [inline]

Returns the displayed minute (0 to 59).

**See also:**

[value\(\)](#), [hour\(\)](#), [second\(\)](#)

#### 30.17.3.4 int Fl\_Clock\_Output::second () const [inline]

Returns the displayed second (0 to 60, 60=leap second).

**See also:**

[value\(\)](#), [hour\(\)](#), [minute\(\)](#)

#### 30.17.3.5 ulong Fl\_Clock\_Output::value () const [inline]

Returns the displayed time.

Returns the time in seconds since the UNIX epoch (January 1, 1970).

**See also:**

[value\(ulong\)](#)

Referenced by [value\(\)](#).

**30.17.3.6 void Fl\_Clock\_Output::value (int *H*, int *m*, int *s*)**

Set the displayed time.

Set the time in hours, minutes, and seconds.

**Parameters:**

$\leftarrow H, m, s$  displayed time

**See also:**

[hour\(\)](#), [minute\(\)](#), [second\(\)](#)

References [Fl\\_Widget::damage\(\)](#).

**30.17.3.7 void Fl\_Clock\_Output::value (ulong *v*)**

Set the displayed time.

Set the time in seconds since the UNIX epoch (January 1, 1970).

**Parameters:**

$\leftarrow v$  seconds since epoch

**See also:**

[value\(\)](#)

References [value\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Clock.H](#)
- [Fl\\_Clock.cxx](#)

## 30.18 Fl\_Color\_Chooser Class Reference

The [Fl\\_Color\\_Chooser](#) widget provides a standard RGB color chooser.

```
#include <Fl_Color_Chooser.h>
```

Inheritance diagram for Fl\_Color\_Chooser::



### Public Member Functions

- int **mode** ()  
*Returns which [Fl\\_Color\\_Chooser](#) variant is currently active.*
- double **hue** () const  
*Returns the current hue.*
- double **saturation** () const  
*Returns the saturation.*
- double **value** () const  
*Returns the value/brightness.*
- double **r** () const  
*Returns the current red value.*
- double **g** () const  
*Returns the current green value.*
- double **b** () const  
*Returns the current blue value.*
- int **hsv** (double H, double S, double V)  
*Set the hsv values.*
- int **rgb** (double R, double G, double B)  
*Sets the current rgb color values.*
- **Fl\_Color\_Chooser** (int X, int Y, int W, int H, const char \*L=0)  
*Creates a new [Fl\\_Color\\_Chooser](#) widget using the given position, size, and label string.*

## Static Public Member Functions

- static void [hsv2rgb](#) (double H, double S, double V, double &R, double &G, double &B)

*This static method converts HSV colors to RGB colorspace.*

- static void [rgb2hsv](#) (double R, double G, double B, double &H, double &S, double &V)

*This static method converts RGB colors to HSV colorspace.*

## Related Functions

(Note that these are not member functions.)

- int [fl\\_color\\_chooser](#) (const char \*name, double &r, double &g, double &b)

*Pops up a window to let the user pick an arbitrary RGB color.*

- int [fl\\_color\\_chooser](#) (const char \*name, uchar &r, uchar &g, uchar &b)

*Pops up a window to let the user pick an arbitrary RGB color.*

### 30.18.1 Detailed Description

The [FL\\_Color\\_Chooser](#) widget provides a standard RGB color chooser.

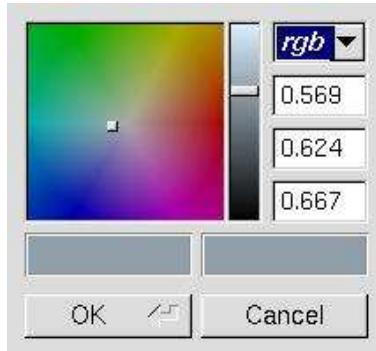


Figure 30.9: `fl_color_chooser()`

You can place any number of the widgets into a panel of your own design. The diagram shows the widget as part of a color chooser dialog created by the `fl_color_chooser()` function. The [FL\\_Color\\_Chooser](#) widget contains the hue box, value slider, and rgb input fields from the above diagram (it does not have the color chips or the Cancel or OK buttons). The callback is done every time the user changes the rgb value. It is not done if they move the hue control in a way that produces the *same* rgb value, such as when saturation or value is zero.

The `fl_color_chooser()` function pops up a window to let the user pick an arbitrary RGB color. They can pick the hue and saturation in the "hue box" on the left (hold down CTRL to just change the saturation), and the brightness using the vertical slider. Or they can type the 8-bit numbers into the RGB [FL\\_Value\\_Input](#) fields, or drag the mouse across them to adjust them. The pull-down menu lets the user set the input fields to show RGB, HSV, or 8-bit RGB (0 to 255).

`fl_color_chooser()` returns non-zero if the user picks ok, and updates the RGB values. If the user picks cancel or closes the window this returns zero and leaves RGB unchanged.

If you use the color chooser on an 8-bit screen, it will allocate all the available colors, leaving you no space to exactly represent the color the user picks! You can however use `fl_rectf()` to fill a region with a simulated color using dithering.

## 30.18.2 Constructor & Destructor Documentation

### 30.18.2.1 Fl\_Color\_Chooser::Fl\_Color\_Chooser (int *X*, int *Y*, int *W*, int *H*, const char \* *L* = 0)

Creates a new `Fl_Color_Chooser` widget using the given position, size, and label string.

The recommended dimensions are 200x95. The color is initialized to black.

**Parameters:**

← *X,Y,W,H* position and size of the widget

← *L* widget label, default is no label

References `Fl_Widget::box()`, `Fl_Widget::callback()`, `Fl_Group::end()`, `FL_DOWN_FRAME`, `FL_HELVETICA_BOLD_ITALIC`, `FL_THIN_UP_BOX`, `Fl_Menu_::menu()`, `Fl_Group::resizable()`, `Fl_Group::resize()`, and `Fl_Menu_::textfont()`.

## 30.18.3 Member Function Documentation

### 30.18.3.1 double Fl\_Color\_Chooser::b () const [inline]

Returns the current blue value.

$0 \leq b \leq 1$ .

Referenced by `fl_color_chooser()`.

### 30.18.3.2 double Fl\_Color\_Chooser::g () const [inline]

Returns the current green value.

$0 \leq g \leq 1$ .

Referenced by `fl_color_chooser()`.

### 30.18.3.3 int Fl\_Color\_Chooser::hsv (double *H*, double *S*, double *V*)

Set the hsv values.

The passed values are clamped (or for hue, modulus 6 is used) to get legal values. Does not do the callback.

**Parameters:**

← *H,S,V* color components.

**Returns:**

1 if a new hsv value was set, 0 if the hsv value was the previous one.

References `hsv2rgb()`, and `Fl_Widget::set_changed()`.

### **30.18.3.4 void Fl\_Color\_Chooser::hsv2rgb (double *H*, double *S*, double *V*, double & *R*, double & *G*, double & *B*) [static]**

This *static* method converts HSV colors to RGB colorspace.

**Parameters:**

← *H,S,V* color components  
→ *R,G,B* color components

Referenced by `hsv()`.

### **30.18.3.5 double Fl\_Color\_Chooser::hue () const [inline]**

Returns the current hue.

$0 \leq \text{hue} < 6$ . Zero is red, one is yellow, two is green, etc. *This value is convenient for the internal calculations - some other systems consider hue to run from zero to one, or from 0 to 360.*

### **30.18.3.6 double Fl\_Color\_Chooser::r () const [inline]**

Returns the current red value.

$0 \leq r \leq 1$ .

Referenced by `fl_color_chooser()`.

### **30.18.3.7 int Fl\_Color\_Chooser::rgb (double *R*, double *G*, double *B*)**

Sets the current rgb color values.

Does not do the callback. Does not clamp (but out of range values will produce psychedelic effects in the hue selector).

**Parameters:**

← *R,G,B* color components.

**Returns:**

1 if a new rgb value was set, 0 if the rgb value was the previous one.

References `rgb2hsv()`, and `Fl_Widget::set_changed()`.

Referenced by `fl_color_chooser()`.

### **30.18.3.8 void Fl\_Color\_Chooser::rgb2hsv (double *R*, double *G*, double *B*, double & *H*, double & *S*, double & *V*) [static]**

This *static* method converts RGB colors to HSV colorspace.

**Parameters:**

←  $R, G, B$  color components  
→  $H, S, V$  color components

Referenced by `rgb()`.

**30.18.3.9 double Fl\_Color\_Chooser::saturation () const [inline]**

Returns the saturation.

$0 \leq \text{saturation} \leq 1$ .

**30.18.3.10 double Fl\_Color\_Chooser::value () const [inline]**

Returns the value/brightness.

$0 \leq \text{value} \leq 1$ .

The documentation for this class was generated from the following files:


- [Fl\\_Color\\_Chooser.H](#)
- [Fl\\_Color\\_Chooser.cxx](#)

## 30.19 Fl\_Counter Class Reference

Controls a single floating point value with button (or keyboard) arrows.

```
#include <Fl_Counter.H>
```

Inheritance diagram for Fl\_Counter::

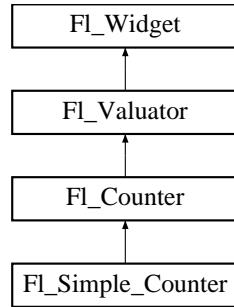

### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Counter](#) (int X, int Y, int W, int H, const char \*L=0)  
*Creates a new [Fl\\_Counter](#) widget using the given position, size, and label string.*
- [~Fl\\_Counter](#) ()  
*Destroys the evaluator.*
- void [lstep](#) (double a)  
*Sets the increment for the large step buttons.*
- void [step](#) (double a, double b)  
*Sets the increments for the normal and large step buttons.*
- void [step](#) (double a)  
*Sets the increment for the normal step buttons.*
- [Fl\\_Font textfont](#) () const  
*Gets the text font.*
- void [textfont](#) ([Fl\\_Font](#) s)  
*Sets the text font to s.*
- [Fl\\_Fontsize textsize](#) () const  
*Gets the font size.*
- void [textsize](#) ([Fl\\_Fontsize](#) s)  
*Sets the font size to s.*

- [Fl\\_Color textcolor \(\) const](#)

*Gets the font color.*

- [void textcolor \(unsigned s\)](#)

*Sets the font color to s.*

## Protected Member Functions

- [void draw \(\)](#)

*Draw the widget.*

### 30.19.1 Detailed Description

Controls a single floating point value with button (or keyboard) arrows.

Double arrows buttons achieve larger steps than simple arrows.

#### See also:

[Fl\\_Spinner](#) for [value](#) input with vertical [step](#) arrows.

Figure 30.10: Fl\_Counter

#### Todo

Refactor the doxygen comments for [Fl\\_Counter type\(\)](#) documentation.

The type of an [Fl\\_Counter](#) object can be set using [type\(uchar t\)](#) to:

- [FL\\_NORMAL\\_COUNTER](#): Displays a counter with 4 arrow buttons.
- [FL\\_SIMPLE\\_COUNTER](#): Displays a counter with only 2 arrow buttons.

## 30.19.2 Constructor & Destructor Documentation

### 30.19.2.1 `Fl_Counter::Fl_Counter (int X, int Y, int W, int H, const char * L = 0)`

Creates a new `Fl_Counter` widget using the given position, size, and label string.

The default type is `FL_NORMAL_COUNTER`.

#### Parameters:

- ← `X, Y, W, H` position and size of the widget
- ← `L` widget label, default is no label

References `Fl_Widget::align()`, `Fl_Valuator::bounds()`, `Fl_Widget::box()`, `FL_ALIGN_BOTTOM`, `FL_FOREGROUND_COLOR`, `FL_HELVETICA`, `FL_INACTIVE_COLOR`, `FL_NORMAL_SIZE`, `FL_UP_BOX`, `Fl_Widget::selection_color()`, and `Fl_Valuator::step()`.

## 30.19.3 Member Function Documentation

### 30.19.3.1 `void Fl_Counter::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `FL_ALIGN_CENTER`, `FL_BACKGROUND2_COLOR`, `fl_color()`, `FL_DOWN_BOX`, `FL_NORMAL_COUNTER`, `FL_THIN_DOWN_BOX`, `FL_THIN_UP_BOX`, `FL_UP_BOX`, `Fl::focus()`, `Fl_Valuator::format()`, `Fl_Widget::h()`, `Fl_Widget::labelcolor()`, `text-color()`, `textfont()`, `textsize()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.19.3.2 `int Fl_Counter::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

- ← `event` the kind of event received

#### Return values:

- 0** if the event was not used or understood
- 1** if the event was used and can be deleted

See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References Fl::add\_timeout(), Fl\_Valuator::clamp(), Fl::event\_key(), FL\_DRAG, FL\_ENTER, FL\_FOCUS, FL\_KEYBOARD, FL\_LEAVE, FL\_Left, FL\_PUSH, FL\_RELEASE, FL\_Right, FL\_UNFOCUS, Fl::focus(), Fl\_Valuator::handle\_drag(), Fl\_Valuator::handle\_push(), Fl\_Valuator::handle\_release(), Fl\_Valuator::increment(), Fl\_Widget::redraw(), Fl::remove\_timeout(), Fl\_Valuator::value(), and Fl::visible\_focus().

### 30.19.3.3 void Fl\_Counter::lstep (double *a*) [inline]

Sets the increment for the large step buttons.

The default value is 1.0.

**Parameters:**

← *a* large step increment.

### 30.19.3.4 void Fl\_Counter::step (double *a*) [inline]

Sets the increment for the normal step buttons.

**Parameters:**

← *a* normal step increment.

Reimplemented from [Fl\\_Valuator](#).

References Fl\_Valuator::step().

### 30.19.3.5 void Fl\_Counter::step (double *a*, double *b*) [inline]

Sets the increments for the normal and large step buttons.

**Parameters:**

← *a,b* normal and large step increments.

References Fl\_Valuator::step().

The documentation for this class was generated from the following files:


- [Fl\\_Counter.H](#)
- [Fl\\_Counter.cxx](#)

## 30.20 Fl\_Dial Class Reference

The [Fl\\_Dial](#) widget provides a circular dial to control a single floating point value.

```
#include <Fl_Dial.H>
```

Inheritance diagram for [Fl\\_Dial](#)::

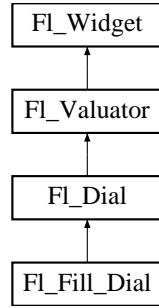

### Public Member Functions

- int [handle](#) (int)  
*Allow subclasses to handle event based on current position and size.*
- [Fl\\_Dial](#) (int x, int y, int w, int h, const char \*l=0)  
*Creates a new [Fl\\_Dial](#) widget using the given position, size, and label string.*
- short [angle1](#) () const  
*Sets Or gets the angles used for the minimum and maximum values.*
- void [angle1](#) (short a)  
*See short [angle1\(\)](#) const.*
- short [angle2](#) () const  
*See short [angle1\(\)](#) const.*
- void [angle2](#) (short a)  
*See short [angle1\(\)](#) const.*
- void [angles](#) (short a, short b)  
*See short [angle1\(\)](#) const.*

### Protected Member Functions

- void [draw](#) (int X, int Y, int W, int H)  
*Draws dial at given position and size.*
- int [handle](#) (int event, int X, int Y, int W, int H)  
*Allows subclasses to handle event based on given position and size.*

- void [draw\(\)](#)  
*Draws dial at current position and size.*

### 30.20.1 Detailed Description

The [Fl\\_Dial](#) widget provides a circular dial to control a single floating point value.

Figure 30.11: Fl\_Dial

Use [type\(\)](#) to set the type of the dial to:

- FL\_NORMAL\_DIAL - Draws a normal dial with a knob.
- FL\_LINE\_DIAL - Draws a dial with a line.
- FL\_FILL\_DIAL - Draws a dial with a filled arc.

### 30.20.2 Constructor & Destructor Documentation

#### 30.20.2.1 [Fl\\_Dial::Fl\\_Dial \(int X, int Y, int W, int H, const char \\* l = 0\)](#)

Creates a new [Fl\\_Dial](#) widget using the given position, size, and label string.

Creates a new [Fl\\_Dial](#) widget using the given position, size, and label string.

The default type is FL\_NORMAL\_DIAL.

References [Fl\\_Widget::box\(\)](#), [FL\\_INACTIVE\\_COLOR](#), and [Fl\\_Widget::selection\\_color\(\)](#).

### 30.20.3 Member Function Documentation

#### 30.20.3.1 [short Fl\\_Dial::angle1 \(\) const \[inline\]](#)

Sets Or gets the angles used for the minimum and maximum values.

The default values are 45 and 315 (0 degrees is straight down and the angles progress clockwise). Normally angle1 is less than angle2, but if you reverse them the dial moves counter-clockwise.

**30.20.3.2 void Fl\_Dial::draw (int *X*, int *Y*, int *W*, int *H*) [protected]**

Draws dial at given position and size.

**Parameters:**

← *X,Y,W,H* position and size

References \_FL\_ROUND\_UP\_BOX, Fl\_Widget::active\_r(), Fl\_Widget::box(), Fl::box\_dh(), Fl::box\_dw(), Fl::box\_dx(), Fl::box\_dy(), Fl\_Widget::color(), Fl\_Widget::damage(), Fl\_Widget::draw\_box(), fl\_arc(), fl\_begin\_loop(), fl\_begin\_polygon(), fl\_circle(), fl\_color(), fl\_end\_loop(), fl\_end\_polygon(), FL\_FILL\_DIAL, FL\_FOREGROUND\_COLOR, fl\_pie(), fl\_pop\_matrix(), fl\_push\_matrix(), fl\_rotate(), fl\_scale(), fl\_translate(), fl\_vertex(), Fl\_Valuator::maximum(), Fl\_Valuator::minimum(), Fl\_Widget::selection\_color(), Fl\_Widget::type(), and Fl\_Valuator::value().

**30.20.3.3 int Fl\_Dial::handle (int *event*, int *X*, int *Y*, int *W*, int *H*) [protected]**

Allows subclasses to handle event based on given position and size.

**Parameters:**

← *event,X,Y,W,H* event to handle, related position and size.

References Fl\_Valuator::clamp(), Fl::event\_x(), Fl::event\_y(), FL\_DRAG, FL\_ENTER, FL\_LEAVE, FL\_PUSH, FL\_RELEASE, Fl\_Valuator::handle\_drag(), Fl\_Valuator::handle\_push(), Fl\_Valuator::handle\_release(), Fl\_Valuator::maximum(), Fl\_Valuator::minimum(), Fl\_Valuator::round(), and Fl\_Valuator::value().

Referenced by handle().

The documentation for this class was generated from the following files:


- [Fl\\_Dial.H](#)
- [Fl\\_Dial.cxx](#)

## 30.21 Fl\_Double\_Window Class Reference

The [Fl\\_Double\\_Window](#) provides a double-buffered window.

```
#include <Fl_Double_Window.h>
```

Inheritance diagram for Fl\_Double\_Window::

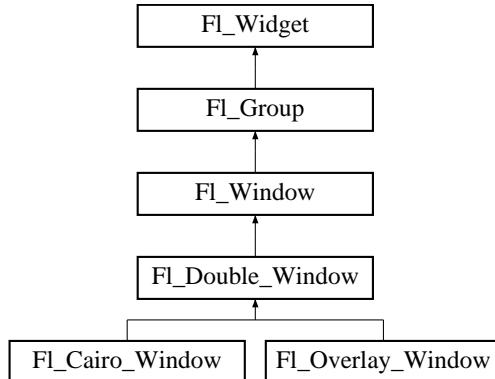

### Public Member Functions

- void [show \(\)](#)

*Put the window on the screen.*

- void [show \(int a, char \\*\\*b\)](#)

*See virtual void [Fl\\_Window::show\(\)](#).*

- void [flush \(\)](#)

*Forces the window to be redrawn.*

- void [resize \(int, int, int, int\)](#)

*Changes the size and position of the window.*

- void [hide \(\)](#)

*Remove the window from the screen.*

- [~Fl\\_Double\\_Window \(\)](#)

*The destructor also deletes all the children.*

- [Fl\\_Double\\_Window \(int W, int H, const char \\*l=0\)](#)

*Creates a new [Fl\\_Double\\_Window](#) widget using the given position, size, and label (title) string.*

- [Fl\\_Double\\_Window \(int X, int Y, int W, int H, const char \\*l=0\)](#)

*See [Fl\\_Double\\_Window::Fl\\_Double\\_Window\(int w, int h, const char \\*label = 0\)](#).*

## Protected Member Functions

- void [flush \(int eraseoverlay\)](#)  
*Forces the window to be redrawn.*

## Protected Attributes

- char [force\\_doublebuffering\\_](#)  
*Force double buffering, even if the OS already buffers windows (overlays need that on MacOS and Windows2000).*

### 30.21.1 Detailed Description

The [Fl\\_Double\\_Window](#) provides a double-buffered window.

If possible this will use the X double buffering extension (Xdbe). If not, it will draw the window data into an off-screen pixmap, and then copy it to the on-screen window.

It is highly recommended that you put the following code before the first [show\(\)](#) of *any* window in your program:

```
Fl::visual(Fl_DOUBLE | Fl_INDEX)
```

This makes sure you can use Xdbe on servers where double buffering does not exist for every visual.

### 30.21.2 Constructor & Destructor Documentation

#### 30.21.2.1 [Fl\\_Double\\_Window::~Fl\\_Double\\_Window \(\)](#)

The destructor *also deletes all the children.*

This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code.

References [hide\(\)](#).

### 30.21.3 Member Function Documentation

#### 30.21.3.1 [void Fl\\_Double\\_Window::flush \(int eraseoverlay\) \[protected\]](#)

Forces the window to be redrawn.

##### Parameters:

← *eraseoverlay* non-zero to erase overlay, zero to ignore

[Fl\\_Overlay\\_Window](#) relies on flush(1) copying the back buffer to the front everywhere, even if [damage\(\) == 0](#), thus erasing the overlay, and leaving the clip region set to the entire window.

References [Fl\\_Widget::clear\\_damage\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Window::draw\(\)](#), [fl\\_clip\\_box\(\)](#), [fl\\_clip\\_region\(\)](#), [fl\\_restore\\_clip\(\)](#), [force\\_doublebuffering\\_](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Window::make\\_current\(\)](#), and [Fl\\_Widget::w\(\)](#).

**30.21.3.2 void Fl\_Double\_Window::hide () [virtual]**

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Overlay\\_Window](#).

Referenced by [Fl\\_Help\\_Dialog::hide\(\)](#), [Fl\\_File\\_Chooser::hide\(\)](#), and [~Fl\\_Double\\_Window\(\)](#).

**30.21.3.3 void Fl\_Double\_Window::resize (int, int, int, int) [virtual]**

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl\\_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl\\_Widget](#) methods [size\(x,y\)](#) and [position\(w,h\)](#), which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Overlay\\_Window](#).

References [Fl\\_Widget::h\(\)](#), and [Fl\\_Widget::w\(\)](#).

Referenced by [Fl\\_Help\\_Dialog::resize\(\)](#).

**30.21.3.4 void Fl\_Double\_Window::show () [virtual]**

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Overlay\\_Window](#).

Referenced by [Fl\\_Overlay\\_Window::show\(\)](#), [Fl\\_Help\\_Dialog::show\(\)](#), and [Fl\\_File\\_Chooser::show\(\)](#).

The documentation for this class was generated from the following files:

- [Fl\\_Double\\_Window.H](#)
- [Fl\\_Double\\_Window.cxx](#)

## 30.22 Fl\_End Class Reference

This is a dummy class that allows you to end a [Fl\\_Group](#) in a constructor list of a class::

```
#include <Fl_Group.H>
```

### Public Member Functions

- [Fl\\_End \(\)](#)  
*All it does is calling [Fl\\_Group::current\(\)](#)->end().*

#### 30.22.1 Detailed Description

This is a dummy class that allows you to end a [Fl\\_Group](#) in a constructor list of a class::

```
class MyClass {
    Fl_Group group;
    Fl_Button button_in_group;
    Fl_End end;
    Fl_Button button_outside_group;
    MyClass();
};

MyClass::MyClass() :
    group(10,10,100,100),
    button_in_group(20,20,60,30),
    end(),
    button_outside_group(10,120,60,30)
{ }
```

The documentation for this class was generated from the following file:


- [Fl\\_Group.H](#)

## 30.23 Fl\_File\_Browser Class Reference

The [Fl\\_File\\_Browser](#) widget displays a list of filenames, optionally with file-specific icons.

```
#include <Fl_File_Browser.H>
```

Inheritance diagram for Fl\_File\_Browser::

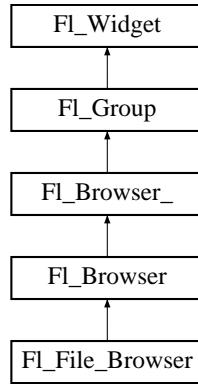

### Public Types

- enum { **FILES**, **DIRECTORIES** }

### Public Member Functions

- [Fl\\_File\\_Browser](#) (int, int, int, int, const char \*==0)  
*The constructor creates the [Fl\\_File\\_Browser](#) widget at the specified position and size.*
- [uchar iconsize \(\) const](#)  
*Sets or gets the size of the icons.*
- [void iconsize \(uchar s\)](#)  
*Sets or gets the size of the icons.*
- [void filter \(const char \\*pattern\)](#)  
*Sets or gets the filename filter.*
- [const char \\* filter \(\) const](#)  
*Sets or gets the filename filter.*
- [int load \(const char \\*directory, Fl\\_File\\_Sort\\_F \\*sort=fl\\_numericsort\)](#)  
*Loads the specified directory into the browser.*
- [Fl\\_Fontsize fontsize \(\) const](#)  
*Gets the default text size for the lines in the browser.*
- [void fontsize \(Fl\\_Fontsize s\)](#)  
*Sets the default text size to size s.*

- int **filetype** () const  
*Sets or gets the file browser type, FILES or DIRECTORIES.*
- void **filetype** (int t)  
*Sets or gets the file browser type, FILES or DIRECTORIES.*

### 30.23.1 Detailed Description

The [Fl\\_File\\_Browser](#) widget displays a list of filenames, optionally with file-specific icons.

### 30.23.2 Constructor & Destructor Documentation

#### 30.23.2.1 **Fl\_File\_Browser::Fl\_File\_Browser (int X, int Y, int W, int H, const char \* l = 0)**

The constructor creates the [Fl\\_File\\_Browser](#) widget at the specified position and size.

The destructor destroys the widget and frees all memory that has been allocated.

References [textsize\(\)](#).

### 30.23.3 Member Function Documentation

#### 30.23.3.1 **void Fl\_File\_Browser::filetype (int t) [inline]**

Sets or gets the file browser type, FILES or DIRECTORIES.

When set to FILES, both files and directories are shown. Otherwise only directories are shown.

#### 30.23.3.2 **int Fl\_File\_Browser::filetype () const [inline]**

Sets or gets the file browser type, FILES or DIRECTORIES.

When set to FILES, both files and directories are shown. Otherwise only directories are shown.

Referenced by [Fl\\_File\\_Chooser::type\(\)](#).

#### 30.23.3.3 **const char\* Fl\_File\_Browser::filter () const [inline]**

Sets or gets the filename filter.

The pattern matching uses the [fl\\_filename\\_match\(\)](#) function in FLTK.

#### 30.23.3.4 **void Fl\_File\_Browser::filter (const char \* pattern)**

Sets or gets the filename filter.

The pattern matching uses the [fl\\_filename\\_match\(\)](#) function in FLTK.

Referenced by [Fl\\_File\\_Chooser::filter\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

**30.23.3.5 void Fl\_File\_Browser::iconsize (uchar s) [inline]**

Sets or gets the size of the icons.

The default size is 20 pixels.

References Fl\_Widget::redraw().

**30.23.3.6 uchar Fl\_File\_Browser::iconsize () const [inline]**

Sets or gets the size of the icons.

The default size is 20 pixels.

Referenced by Fl\_File\_Chooser::iconsize().

**30.23.3.7 int Fl\_File\_Browser::load (const char \* *directory*, Fl\_File\_Sort\_F \* *sort* = fl\_numericsort)**

Loads the specified directory into the browser.

If icons have been loaded then the correct icon is associated with each file in the list.

The sort argument specifies a sort function to be used with fl\_filename\_list().

References Fl\_Browser::clear(), Fl\_Group::find(), Fl\_File\_Icon::find(), Fl\_Browser::insert(), and Fl\_File\_Icon::type().

Referenced by Fl\_File\_Chooser::rescan(), and Fl\_File\_Chooser::rescan\_keep\_filename().

The documentation for this class was generated from the following files:

- [Fl\\_File\\_Browser.H](#)
- [Fl\\_File\\_Browser.cxx](#)

## 30.24 Fl\_File\_Chooser Class Reference

The [Fl\\_File\\_Chooser](#) widget displays a standard file selection dialog that supports various selection modes.

### Public Types

- enum { **SINGLE** = 0, **MULTI** = 1, **CREATE** = 2, **DIRECTORY** = 4 }

### Public Member Functions

- [\*\*Fl\\_File\\_Chooser\*\*](#) (const char \*d, const char \*p, int t, const char \*title)  
*The constructor creates the [Fl\\_File\\_Chooser](#) dialog shown.*
- [\*\*~Fl\\_File\\_Chooser\*\*](#) ()  
*Destroys the widget and frees all memory used by it.*
- void [\*\*callback\*\*](#) (void(\*cb)([Fl\\_File\\_Chooser](#) \*, void \*), void \*d=0)  
*Sets the file chooser callback cb and associated data d.*
- void [\*\*color\*\*](#) ([Fl\\_Color](#) c)  
*Sets or gets the background color of the [Fl\\_File\\_Browser](#) list.*
- [\*\*Fl\\_Color color\*\*](#) ()  
*Sets or gets the background color of the [Fl\\_File\\_Browser](#) list.*
- int [\*\*count\*\*](#) ()  
*Returns the number of selected files.*
- void [\*\*directory\*\*](#) (const char \*d)  
*Sets or gets the current directory.*
- char \* [\*\*directory\*\*](#) ()  
*Sets or gets the current directory.*
- void [\*\*filter\*\*](#) (const char \*p)  
*Sets or gets the current filename filter patterns.*
- const char \* [\*\*filter\*\*](#) ()  
*See void [filter\(const char \\*pattern\)](#).*
- int [\*\*filter\\_value\*\*](#) ()  
*Sets or gets the current filename filter selection.*
- void [\*\*filter\\_value\*\*](#) (int f)  
*Sets or gets the current filename filter selection.*
- void [\*\*hide\*\*](#) ()  
*Hides the [Fl\\_File\\_Chooser](#) window.*

- **void iconszie (uchar s)**  
*Sets or gets the size of the icons in the Fl\_File\_Browser.*
- **uchar iconszie ()**  
*Sets or gets the size of the icons in the Fl\_File\_Browser.*
- **void label (const char \*l)**  
*Sets or gets the title bar text for the Fl\_File\_Chooser.*
- **const char \* label ()**  
*Sets or gets the title bar text for the Fl\_File\_Chooser.*
- **void ok\_label (const char \*l)**  
*Sets or gets the label for the "ok" button in the Fl\_File\_Chooser.*
- **const char \* ok\_label ()**  
*Sets or gets the label for the "ok" button in the Fl\_File\_Chooser.*
- **void preview (int e)**  
*Enable or disable the preview tile.*
- **int preview () const**  
*Returns the current state of the preview box.*
- **void rescan ()**  
*Reloads the current directory in the Fl\_File\_Browser.*
- **void rescan\_keep\_filename ()**  
*Rescan the current directory without clearing the filename, then select the file if it is in the list.*
- **void show ()**  
*Shows the Fl\_File\_Chooser window.*
- **int shown ()**  
*Returns non-zero if the file chooser main window `show()` has been called (but not `hide()`) see Fl\_Window::shown().*
- **void textcolor (Fl\_Color c)**  
*Sets or gets the current Fl\_File\_Browser text color.*
- **Fl\_Color textcolor ()**  
*Sets or gets the current Fl\_File\_Browser text color.*
- **void textfont (Fl\_Font f)**  
*Sets or gets the current Fl\_File\_Browser text font.*
- **Fl\_Font textfont ()**  
*Sets or gets the current Fl\_File\_Browser text font.*
- **void textsize (Fl\_Fontsize s)**

*Sets or gets the current [Fl\\_File\\_Browser](#) text size.*

- [Fl\\_Fontsize](#) `textsize ()`

*Sets or gets the current [Fl\\_File\\_Browser](#) text size.*

- `void type (int t)`

*Sets or gets the current type of [Fl\\_File\\_Chooser](#).*

- `int type ()`

*Sets or gets the current type of [Fl\\_File\\_Chooser](#).*

- `void * user_data () const`

*Gets the file chooser user data d.*

- `void user_data (void *d)`

*Sets the file chooser user data d.*

- `const char * value (int f=1)`

*See `const char *value(const char *pathname)`.*

- `void value (const char *filename)`

*Sets or gets the current value of the selected file.*

- `int visible ()`

*Returns 1 if the [Fl\\_File\\_Chooser](#) window is visible.*

- [Fl\\_Widget](#) \* `add_extra (Fl_Widget *gr)`

*Adds extra widget at the bottom of [Fl\\_File\\_Chooser](#) window.*

## Public Attributes

- [Fl\\_Button](#) \* `newButton`

*The "new directory" button is exported so that application developers can control the appearance and use.*

- [Fl\\_Check\\_Button](#) \* `previewButton`

*The "preview" button is exported so that application developers can control the appearance and use.*

## Static Public Attributes

- `static const char * add_favorites_label = "Add to Favorites"`

*[standard text may be customized at run-time]*

- `static const char * all_files_label = "All Files (*)"`

*[standard text may be customized at run-time]*

- `static const char * custom_filter_label = "Custom Filter"`

*[standard text may be customized at run-time]*

- static const char \* **existing\_file\_label** = "Please choose an existing file!"  
*[standard text may be customized at run-time]*
- static const char \* **favorites\_label** = "Favorites"  
*[standard text may be customized at run-time]*
- static const char \* **filename\_label** = "Filename:"  
*[standard text may be customized at run-time]*
- static const char \* **filesystems\_label** = "File Systems"  
*[standard text may be customized at run-time]*
- static const char \* **manage\_favorites\_label** = "Manage Favorites"  
*[standard text may be customized at run-time]*
- static const char \* **new\_directory\_label** = "New Directory?"  
*[standard text may be customized at run-time]*
- static const char \* **new\_directory\_tooltip** = "Create a new directory."  
*[standard text may be customized at run-time]*
- static const char \* **preview\_label** = "Preview"  
*[standard text may be customized at run-time]*
- static const char \* **save\_label** = "Save"  
*[standard text may be customized at run-time]*
- static const char \* **show\_label** = "Show:"  
*[standard text may be customized at run-time]*
- static Fl\_File\_Sort\_F \* **sort** = fl\_numericsort  
*the sort function that is used when loading the contents of a directory.*

## Related Functions

(Note that these are not member functions.)

- void **fl\_file\_chooser\_callback** (void(\*cb)(const char \*))
- void **fl\_file\_chooser\_ok\_label** (const char \*l)
- char \* **fl\_file\_chooser** (const char \*message, const char \*pat, const char \*fname, int relative)
- char \* **fl\_dir\_chooser** (const char \*message, const char \*fname, int relative)

### 30.24.1 Detailed Description

The [Fl\\_File\\_Chooser](#) widget displays a standard file selection dialog that supports various selection modes.

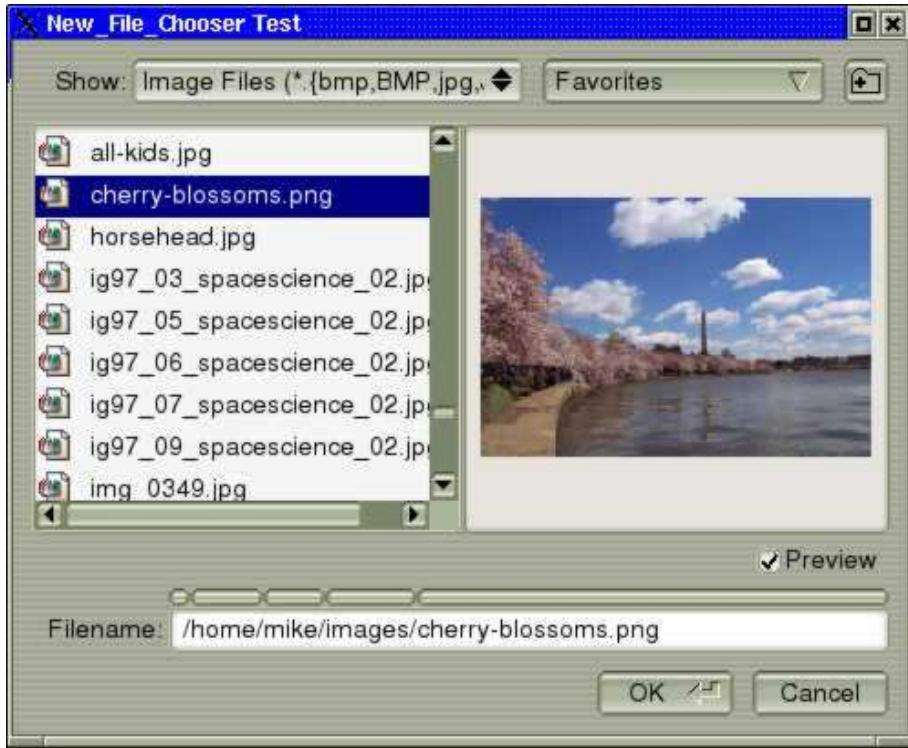


Figure 30.12: `Fl_File_Chooser`

The [Fl\\_File\\_Chooser](#) class also exports several static values that may be used to localize or customize the appearance of all file chooser dialogs:

Member	Default value
<code>addFavorites_label</code>	"Add to Favorites"
<code>allFiles_label</code>	"All Files (*)"
<code>customFilter_label</code>	"Custom Filter"
<code>existingFile_label</code>	"Please choose an existing file!"
<code>favorites_label</code>	"Favorites"
<code>filename_label</code>	"Filename:"
<code>filesystems_label</code>	"My Computer" (WIN32) "File Systems" (all others)
<code>manageFavorites_label</code>	"Manage Favorites"
<code>newDirectory_label</code>	"New Directory?"
<code>newDirectory_tooltip</code>	"Create a new directory."
<code>preview_label</code>	"Preview"
<code>save_label</code>	"Save"
<code>show_label</code>	"Show:"
<code>sort</code>	<code>fl_numericsort</code>

The [Fl\\_File\\_Chooser::sort](#) member specifies the sort function that is used when loading the contents of a directory and can be customized at run-time.

The [Fl\\_File\\_Chooser](#) class also exports the [Fl\\_File\\_Chooser::newButton](#) and [Fl\\_File\\_Chooser::previewButton](#) widgets so that application developers can control their appearance and use. For more complex customization, consider copying the FLTK file chooser code and changing it accordingly.

### 30.24.2 Constructor & Destructor Documentation

#### 30.24.2.1 [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser \(const char \\* pathname, const char \\* pattern, int type, const char \\* title\)](#)

The constructor creates the [Fl\\_File\\_Chooser](#) dialog shown.

The pathname argument can be a directory name or a complete file name (in which case the corresponding file is highlighted in the list and in the filename input field.)

The pattern argument can be a NULL string or "\*" to list all files, or it can be a series of descriptions and filter strings separated by tab characters (\t). The format of filters is either "Description text (patterns)" or just "patterns". A file chooser that provides filters for HTML and image files might look like:

```
"HTML Files (*.html) \tImage Files (*.{bmp,gif,jpg,png})"
```

The file chooser will automatically add the "All Files (\*)" pattern to the end of the string you pass if you do not provide one. The first filter in the string is the default filter.

See the FLTK documentation on [fl\\_filename\\_match\(\)](#) for the kinds of pattern strings that are supported.

The type argument can be one of the following:

- SINGLE - allows the user to select a single, existing file.
- MULTI - allows the user to select one or more existing files.
- CREATE - allows the user to select a single, existing file or specify a new filename.
- DIRECTORY - allows the user to select a single, existing directory.

The title argument is used to set the title bar text for the [Fl\\_File\\_Chooser](#) window.

References [Fl\\_Widget::align\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::callback\(\)](#), [Fl\\_Group::current\(\)](#), [Fl\\_Button::down\\_box\(\)](#), [Fl\\_Menu\\_::down\\_box\(\)](#), [Fl\\_Group::end\(\)](#), [favorites\\_label](#), [filename\\_label](#), [filter\(\)](#), [FL\\_ALIGN\\_CLIP](#), [FL\\_ALIGN\\_INSIDE](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_ALIGN\\_RIGHT](#), [FL\\_BORDER\\_BOX](#), [fl\\_cancel](#), [FL\\_DOWN\\_BOX](#), [fl\\_ok](#), [FL\\_WHEN\\_CHANGED](#), [FL\\_WHEN\\_ENTER\\_KEY](#), [Fl\\_Preferences::get\(\)](#), [Fl::h\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Window::hotspot\(\)](#), [Fl\\_Widget::image\(\)](#), [Fl\\_Window::label\(\)](#), [Fl\\_Widget::label\(\)](#), [Fl\\_Widget::labelfont\(\)](#), [Fl\\_Widget::labelsize\(\)](#), [manage\\_favorites\\_label](#), [new\\_directory\\_tooltip](#), [newButton](#), [preview\(\)](#), [preview\\_label](#), [previewButton](#), [Fl\\_Group::resizable\(\)](#), [save\\_label](#), [Fl\\_Window::set\\_modal\(\)](#), [Fl\\_Button::shortcut\(\)](#), [show\\_label](#), [Fl\\_Window::size\\_range\(\)](#), [Fl\\_Widget::tooltip\(\)](#), [type\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Widget::user\\_data\(\)](#), [value\(\)](#), [Fl\\_Button::value\(\)](#), [Fl::w\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::when\(\)](#), and [Fl\\_Widget::window\(\)](#).

#### 30.24.2.2 [Fl\\_File\\_Chooser::~Fl\\_File\\_Chooser \(\)](#)

Destroys the widget and frees all memory used by it.

References [Fl\\_Group::remove\(\)](#), and [Fl::remove\\_timeout\(\)](#).

### 30.24.3 Member Function Documentation

#### 30.24.3.1 `Fl_Widget * Fl_File_Chooser::add_extra (Fl_Widget * gr)`

Adds extra widget at the bottom of `Fl_File_Chooser` window.

Returns pointer for previous extra widget or NULL if not set previously. If argument is NULL only remove previous extra widget.

**Note:**

`Fl_File_Chooser` does **not** delete extra widget in destructor! To prevent memory leakage, don't forget to delete unused extra widgets

References `Fl_Group::add()`, `Fl_Widget::h()`, `Fl_Widget::position()`, `Fl_Group::remove()`, `Fl_Group::resizable()`, `Fl_Widget::size()`, `Fl_Widget::w()`, and `Fl_Widget::y()`.

#### 30.24.3.2 `Fl_Color Fl_File_Chooser::color ()`

Sets or gets the background color of the `Fl_File_Browser` list.

References `Fl_Widget::color()`.

#### 30.24.3.3 `void Fl_File_Chooser::color (Fl_Color c)`

Sets or gets the background color of the `Fl_File_Browser` list.

References `Fl_Widget::color()`.

#### 30.24.3.4 `int Fl_File_Chooser::count ()`

Returns the number of selected files.

References `Fl_Browser::selected()`, `Fl_Browser::size()`, and `Fl_File_Input::value()`.

#### 30.24.3.5 `const char * Fl_File_Chooser::directory ()`

Sets or gets the current directory.

Referenced by `value()`.

#### 30.24.3.6 `void Fl_File_Chooser::directory (const char * pathname)`

Sets or gets the current directory.

References `rescan()`, and `shown()`.

Referenced by `fl_file_chooser()`.

#### 30.24.3.7 `void Fl_File_Chooser::filter (const char * pattern)`

Sets or gets the current filename filter patterns.

The filter patterns use fl\_filename\_match(). Multiple patterns can be used by separating them with tabs, like "`*.jpg\t*.png\t*.gif\t*`". In addition, you can provide human-readable labels with the patterns inside parenthesis, like "`JPEG Files (*.jpg)\tPNG Files (*.png)\tGIF Files (*.gif)\tAll Files (*)`" .

Use filter(NULL) to show all files.

References Fl\_Menu\_::add(), all\_files\_label, Fl\_Menu\_::clear(), custom\_filter\_label, and Fl\_Choice::value().

Referenced by fl\_dir\_chooser(), and fl\_file\_chooser().

#### 30.24.3.8 void Fl\_File\_Chooser::filter\_value (int *f*)

Sets or gets the current filename filter selection.

References Fl\_Choice::value().

#### 30.24.3.9 int Fl\_File\_Chooser::filter\_value ()

Sets or gets the current filename filter selection.

References Fl\_Choice::value().

#### 30.24.3.10 void Fl\_File\_Chooser::hide ()

Hides the [Fl\\_File\\_Chooser](#) window.

References Fl\_Double\_Window::hide().

#### 30.24.3.11 uchar Fl\_File\_Chooser::iconsize ()

Sets or gets the size of the icons in the [Fl\\_File\\_Browser](#).

By default the icon size is set to 1.5 times the [textsize\(\)](#).

References Fl\_File\_Browser::iconsize().

#### 30.24.3.12 void Fl\_File\_Chooser::iconsize (uchar *s*)

Sets or gets the size of the icons in the [Fl\\_File\\_Browser](#).

By default the icon size is set to 1.5 times the [textsize\(\)](#).

References Fl\_File\_Browser::iconsize().

#### 30.24.3.13 const char \* Fl\_File\_Chooser::label ()

Sets or gets the title bar text for the [Fl\\_File\\_Chooser](#).

References Fl\_Window::label().

#### 30.24.3.14 void Fl\_File\_Chooser::label (const char \* *l*)

Sets or gets the title bar text for the [Fl\\_File\\_Chooser](#).

References [Fl\\_Window::label\(\)](#).

Referenced by [fl\\_dir\\_chooser\(\)](#), and [fl\\_file\\_chooser\(\)](#).

### **30.24.3.15 int Fl\_File\_Chooser::preview () const [inline]**

Returns the current state of the preview box.

Referenced by [Fl\\_File\\_Chooser\(\)](#).

### **30.24.3.16 void Fl\_File\_Chooser::preview (int e)**

Enable or disable the preview tile.

1 = enable preview, 0 = disable preview.

References [Fl\\_Preferences::flush\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::hide\(\)](#), [Fl\\_Group::init\\_sizes\(\)](#), [Fl\\_Widget::parent\(\)](#), [previewButton](#), [Fl\\_Widget::redraw\(\)](#), [Fl\\_Widget::resize\(\)](#), [Fl\\_Browser::resize\(\)](#), [Fl\\_Preferences::set\(\)](#), [Fl\\_Widget::show\(\)](#), [Fl\\_Button::value\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

### **30.24.3.17 void Fl\_File\_Chooser::rescan ()**

Reloads the current directory in the [Fl\\_File\\_Browser](#).

References [Fl\\_Widget::activate\(\)](#), [Fl\\_Widget::deactivate\(\)](#), [Fl\\_File\\_Browser::load\(\)](#), sort, and [Fl\\_File\\_Input::value\(\)](#).

Referenced by [directory\(\)](#), and [rescan\\_keep\\_filename\(\)](#).

### **30.24.3.18 void Fl\_File\_Chooser::show ()**

Shows the [Fl\\_File\\_Chooser](#) window.

References [Fl::flush\(\)](#), [Fl\\_Window::hotspot\(\)](#), [rescan\\_keep\\_filename\(\)](#), [Fl\\_Double\\_Window::show\(\)](#), and [Fl\\_Widget::take\\_focus\(\)](#).

Referenced by [fl\\_dir\\_chooser\(\)](#), and [fl\\_file\\_chooser\(\)](#).

### **30.24.3.19 Fl\_Color Fl\_File\_Chooser::textcolor ()**

Sets or gets the current [Fl\\_File\\_Browser](#) text color.

References [Fl\\_Browser::textcolor\(\)](#).

### **30.24.3.20 void Fl\_File\_Chooser::textcolor (Fl\_Color c)**

Sets or gets the current [Fl\\_File\\_Browser](#) text color.

References [Fl\\_Browser::textcolor\(\)](#).

### **30.24.3.21 Fl\_Font Fl\_File\_Chooser::textfont ()**

Sets or gets the current [Fl\\_File\\_Browser](#) text font.

References Fl\_Browser\_::textfont().

#### 30.24.3.22 void Fl\_File\_Chooser::textfont (Fl\_Font *f*)

Sets or gets the current [Fl\\_File\\_Browser](#) text font.

References Fl\_Browser\_::textfont().

#### 30.24.3.23 Fl\_Fontsize Fl\_File\_Chooser::textsize ()

Sets or gets the current [Fl\\_File\\_Browser](#) text size.

References Fl\_File\_Browser::textsize().

#### 30.24.3.24 void Fl\_File\_Chooser::textsize (Fl\_Fontsize *s*)

Sets or gets the current [Fl\\_File\\_Browser](#) text size.

References Fl\_File\_Browser::textsize().

#### 30.24.3.25 int Fl\_File\_Chooser::type ()

Sets or gets the current type of [Fl\\_File\\_Chooser](#).

Referenced by Fl\_File\_Chooser().

#### 30.24.3.26 void Fl\_File\_Chooser::type (int *t*)

Sets or gets the current type of [Fl\\_File\\_Chooser](#).

References Fl\_Widget::activate(), Fl\_Widget::deactivate(), Fl\_File\_Browser::filetype(), FL\_HOLD\_BROWSER, FL\_MULTI\_BROWSER, newButton, and Fl\_Widget::type().

Referenced by fl\_dir\_chooser(), and fl\_file\_chooser().

#### 30.24.3.27 void Fl\_File\_Chooser::value (const char \* *pathname*)

Sets or gets the current value of the selected file.

In the second form, *file* is a 1-based index into a list of file names. The number of selected files is returned by [Fl\\_File\\_Chooser::count\(\)](#).

This sample code loops through all selected files:

```
// Get list of filenames user selected from a MULTI chooser
for ( int t=1; t>=chooser->count(); t++ ) {
    const char *filename = chooser->value(t);
    ...
}
```

References Fl\_Widget::activate(), Fl\_Widget::deactivate(), Fl\_Browser\_::deselect(), directory(), Fl\_Input\_::position(), Fl\_Widget::redraw(), Fl\_Browser::select(), Fl\_Browser::size(), Fl\_Browser::text(), Fl\_Browser::topline(), and Fl\_File\_Input::value().

**30.24.3.28 int Fl\_File\_Chooser::visible ()**

Returns 1 if the [Fl\\_File\\_Chooser](#) window is visible.

References [Fl\\_Widget::visible\(\)](#).

The documentation for this class was generated from the following files:

- [Fl\\_File\\_Chooser.H](#)
- [Fl\\_File\\_Chooser.cxx](#)
- [Fl\\_File\\_Chooser2.cxx](#)
- [fl\\_file\\_dir.cxx](#)

## 30.25 Fl\_File\_Icon Class Reference

The `Fl_File_Icon` class manages icon images that can be used as labels in other widgets and as icons in the FileBrowser widget.

```
#include <Fl_File_Icon.h>
```

### Public Types

- enum {  
**ANY, PLAIN, FIFO, DEVICE,**  
**LINK, DIRECTORY** }
- enum {  
**END, COLOR, LINE, CLOSEDLINE,**  
**POLYGON, OUTLINEPOLYGON, VERTEX** }

### Public Member Functions

- `Fl_File_Icon (const char *p, int t, int nd=0, short *d=0)`  
*Creates a new `Fl_File_Icon` with the specified information.*
- `~Fl_File_Icon ()`  
*The destructor destroys the icon and frees all memory that has been allocated for it.*
- `short * add (short d)`  
*Adds a keyword value to the icon array, returning a pointer to it.*
- `short * add_color (Fl_Color c)`  
*Adds a color value to the icon array, returning a pointer to it.*
- `short * add_vertex (int x, int y)`  
*Adds a vertex value to the icon array, returning a pointer to it.*
- `short * add_vertex (float x, float y)`  
*Adds a vertex value to the icon array, returning a pointer to it.*
- `void clear ()`  
*Clears all icon data from the icon.*
- `void draw (int x, int y, int w, int h, Fl_Color ic, int active=1)`  
*Draws an icon in the indicated area.*
- `void label (Fl_Widget *w)`  
*Applies the icon to the widget, registering the `Fl_File_Icon` label type as needed.*
- `void load (const char *f)`  
*Loads the specified icon image.*
- `int load_fti (const char *fti)`

*Loads an SGI icon file.*

- int **load\_image** (const char \**i*)

*Load an image icon file from an image filename.*

- **Fl\_File\_Icon \* next** ()

*Returns next file icon object.*

- const char \* **pattern** ()

*Returns the filename matching pattern for the icon.*

- int **size** ()

*Returns the number of words of data used by the icon.*

- int **type** ()

*Returns the filetype associated with the icon, which can be one of the following:*

- short \* **value** ()

*Returns the data array for the icon.*

## Static Public Member Functions

- static void **labeltype** (const **Fl\_Label** \**o*, int *x*, int *y*, int *w*, int *h*, **Fl\_Align** *a*)

*Draw the icon label.*

- static **Fl\_File\_Icon \* find** (const char \*filename, int filetype=ANY)

*Finds an icon that matches the given filename and file type.*

- static **Fl\_File\_Icon \* first** ()

*Returns a pointer to the first icon in the list.*

- static void **load\_system\_icons** (void)

*Loads all system-defined icons.*

### 30.25.1 Detailed Description

The **Fl\_File\_Icon** class manages icon images that can be used as labels in other widgets and as icons in the FileBrowser widget.

### 30.25.2 Constructor & Destructor Documentation

#### 30.25.2.1 **Fl\_File\_Icon::Fl\_File\_Icon** (const char \**p*, int *t*, int *nd* = 0, short \**d* = 0)

Creates a new **Fl\_File\_Icon** with the specified information.

##### Parameters:

← *p* filename pattern

← *t* file type  
← *nd* number of data values  
← *d* data values

Referenced by load\_system\_icons().

### 30.25.3 Member Function Documentation

#### 30.25.3.1 short \* Fl\_File\_Icon::add (short *d*)

Adds a keyword value to the icon array, returning a pointer to it.

**Parameters:**

← *d* data value

#### 30.25.3.2 short\* Fl\_File\_Icon::add\_color (Fl\_Color *c*) [inline]

Adds a color value to the icon array, returning a pointer to it.

**Parameters:**

← *c* color value

Referenced by load\_fti(), and load\_image().

#### 30.25.3.3 short\* Fl\_File\_Icon::add\_vertex (float *x*, float *y*) [inline]

Adds a vertex value to the icon array, returning a pointer to it.

The floating point version goes from 0.0 to 1.0. The origin (0.0) is in the lower-lefthand corner of the icon.

**Parameters:**

← *x,y* vertex coordinates

#### 30.25.3.4 short\* Fl\_File\_Icon::add\_vertex (int *x*, int *y*) [inline]

Adds a vertex value to the icon array, returning a pointer to it.

The integer version accepts coordinates from 0 to 10000. The origin (0.0) is in the lower-lefthand corner of the icon.

**Parameters:**

← *x,y* vertex coordinates

Referenced by load\_fti(), and load\_image().

**30.25.3.5 void Fl\_File\_Icon::clear () [inline]**

Clears all icon data from the icon.

**30.25.3.6 void Fl\_File\_Icon::draw (int *x*, int *y*, int *w*, int *h*, Fl\_Color *ic*, int *active* = 1)**

Draws an icon in the indicated area.

**Parameters:**

- ← *x,y,w,h* position and size
- ← *ic* icon color
- ← *active* status, default is active [non-zero]

References fl\_begin\_complex\_polygon(), fl\_begin\_line(), fl\_begin\_loop(), fl\_color(), fl\_end\_complex\_polygon(), fl\_end\_line(), fl\_end\_loop(), fl\_end\_polygon(), FL\_ICON\_COLOR, fl\_pop\_matrix(), fl\_push\_matrix(), fl\_scale(), fl\_translate(), and fl\_vertex().

Referenced by labeltype().

**30.25.3.7 Fl\_File\_Icon \* Fl\_File\_Icon::find (const char \**filename*, int *filetype* = ANY) [static]**

Finds an icon that matches the given filename and file type.

**Parameters:**

- ← *filename* name of file
- ← *filetype* enumerated file type

**Returns:**

matching file icon or NULL

References next\_, pattern\_, and type\_.

Referenced by Fl\_File\_Browser::load().

**30.25.3.8 static Fl\_File\_Icon\* Fl\_File\_Icon::first () [inline, static]**

Returns a pointer to the first icon in the list.

**30.25.3.9 void Fl\_File\_Icon::label (Fl\_Widget \**w*)**

Applies the icon to the widget, registering the [Fl\\_File\\_Icon](#) label type as needed.

**Parameters:**

- ← *w* widget for which this icon will become the label

References \_FL\_ICON\_LABEL, Fl\_Widget::label(), labeltype(), and Fl::set\_labeltype().

---

**30.25.3.10 void Fl\_File\_Icon::labeltype (const Fl\_Label \**o*, int *x*, int *y*, int *w*, int *h*, Fl\_Align *a*) [static]**

Draw the icon label.

**Parameters:**

- ← *o* label data
- ← *x,y,w,h* position and size of label
- ← *a* label alignment [not used]

References Fl\_Label::color, draw(), and Fl\_Label::value.

Referenced by label().

**30.25.3.11 void Fl\_File\_Icon::load (const char \**f*)**

Loads the specified icon image.

The format is deduced from the filename.

**Parameters:**

- ← *f* filename

References load\_fti(), load\_image(), and Fl::warning.

**30.25.3.12 int Fl\_File\_Icon::load\_fti (const char \**fti*)**

Loads an SGI icon file.

**Parameters:**

- ← *fti* icon filename

**Returns:**

0 on success, non-zero on error

References add\_color(), add\_vertex(), Fl::error, and FL\_ICON\_COLOR.

Referenced by load(), and load\_system\_icons().

**30.25.3.13 int Fl\_File\_Icon::load\_image (const char \**ifile*)**

Load an image icon file from an image filename.

**Parameters:**

- ← *ifile* image filename

**Returns:**

0 on success, non-zero on error

References add\_color(), add\_vertex(), Fl\_Image::count(), Fl\_Image::d(), Fl\_Image::data(), Fl\_Shared\_Image::get(), Fl\_Image::h(), Fl\_Image::id(), Fl\_Shared\_Image::release(), and Fl\_Image::w().

Referenced by load(), and load\_system\_icons().

**30.25.3.14 void Fl\_File\_Icon::load\_system\_icons (void) [static]**

Loads all system-defined icons.

This call is useful when using the FileChooser widget and should be used when the application starts:

```
Fl_File_Icon::load_system_icons();
```

References Fl\_File\_Icon(), load\_fti(), load\_image(), and next\_.

**30.25.3.15 Fl\_File\_Icon\* Fl\_File\_Icon::next () [inline]**

Returns next file icon object.

See [Fl\\_File\\_Icon::first\(\)](#)

**30.25.3.16 const char\* Fl\_File\_Icon::pattern () [inline]**

Returns the filename matching pattern for the icon.

**30.25.3.17 int Fl\_File\_Icon::size () [inline]**

Returns the number of words of data used by the icon.

**30.25.3.18 int Fl\_File\_Icon::type () [inline]**

Returns the filetype associated with the icon, which can be one of the following:..

- Fl\_File\_Icon::ANY, any kind of file.
- Fl\_File\_Icon::PLAIN, plain files.
- Fl\_File\_Icon::FIFO, named pipes.
- Fl\_File\_Icon::DEVICE, character and block devices.
- Fl\_File\_Icon::LINK, symbolic links.
- Fl\_File\_Icon::DIRECTORY, directories.

Referenced by Fl\_File\_Browser::load().

**30.25.3.19 short\* Fl\_File\_Icon::value () [inline]**

Returns the data array for the icon.

The documentation for this class was generated from the following files:


- [Fl\\_File\\_Icon.H](#)
- [Fl\\_File\\_Icon.cxx](#)
- [Fl\\_File\\_Icon2.cxx](#)

## 30.26 Fl\_File\_Input Class Reference

This widget displays a pathname in a text input field.

```
#include <Fl_File_Input.h>
```

Inheritance diagram for Fl\_File\_Input::



### Public Member Functions

- **[Fl\\_File\\_Input](#)** (int X, int Y, int W, int H, const char \*L=0)  
*Creates a new [Fl\\_File\\_Input](#) widget using the given position, size, and label string.*
- virtual int **[handle](#)** (int event)  
*Handle events in the widget.*
- virtual void **[draw](#)** ()  
*Draws the file input widget.*
- **[Fl\\_Boxtype](#)** **[down\\_box](#)** () const  
*Gets the box type used for the navigation bar.*
- void **[down\\_box](#)** (**[Fl\\_Boxtype](#)** b)  
*Sets the box type to use for the navigation bar.*
- **[Fl\\_Color](#)** **[errorcolor](#)** () const  
*Gets the current error color.*
- void **[errorcolor](#)** (**[Fl\\_Color](#)** c)  
*Sets the current error color to c.*
- int **[value](#)** (const char \*str)  
*Sets the value of the widget given a new string value.*
- int **[value](#)** (const char \*str, int len)  
*Sets the value of the widget given a new string value and its length.*
- const char \* **[value](#)** ()  
*Returns the current value, which is a pointer to an internal buffer and is valid only until the next event is handled.*

### 30.26.1 Detailed Description

This widget displays a pathname in a text input field.

A navigation bar located above the input field allows the user to navigate upward in the directory tree. You may want to handle FL\_WHEN\_CHANGED events for tracking text changes and also FL\_WHEN\_RELEASE for button release when changing to parent dir. FL\_WHEN\_RELEASE callback won't be called if the directory clicked is the same that the current one.




Figure 30.13: Fl\_File\_Input

**Note:**

As all [Fl\\_Input](#) derived objects, [Fl\\_File\\_Input](#) may call its callback when loosing focus (see [FL\\_UNFOCUS](#)) to update its state like its cursor shape. One resulting side effect is that you should call [clear\\_changed\(\)](#) early in your callback to avoid reentrant calls if you plan to show another window or dialog box in the callback.

### 30.26.2 Constructor & Destructor Documentation

#### 30.26.2.1 [Fl\\_File\\_Input::Fl\\_File\\_Input \(int X, int Y, int W, int H, const char \\* L = 0\)](#)

Creates a new [Fl\\_File\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_DOWN\\_BOX](#).

**Parameters:**

← *X,Y,W,H* position and size of the widget

← *L* widget label, default is no label

References [down\\_box\(\)](#), and [FL\\_UP\\_BOX](#).

### 30.26.3 Member Function Documentation

#### 30.26.3.1 [void Fl\\_File\\_Input::down\\_box \(Fl\\_Boxtype b\) \[inline\]](#)

Sets the box type to use for the navigation bar.

#### 30.26.3.2 [Fl\\_Boxtype Fl\\_File\\_Input::down\\_box \(\) const \[inline\]](#)

Gets the box type used for the navigation bar.

Referenced by [Fl\\_File\\_Input\(\)](#).

#### 30.26.3.3 [Fl\\_Color Fl\\_File\\_Input::errorcolor \(\) const \[inline\]](#)

Gets the current error color.

**Todo**

Better docs for [Fl\\_File\\_Input::errorcolor\(\)](#) - is it even used?

**30.26.3.4 int Fl\_File\_Input::handle (int *event*) [virtual]**

Handle events in the widget.

Return non zero if event is handled.

**Parameters:**

← *event*

Reimplemented from [Fl\\_Input](#).

References [Fl\\_Widget::active\\_r\(\)](#), [Fl\\_Window::cursor\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl::event\\_y\(\)](#), [FL\\_DRAG](#), [FL\\_ENTER](#), [FL\\_MOVE](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [Fl\\_Input::handle\(\)](#), [Fl\\_Widget::window\(\)](#), and [Fl\\_Widget::y\(\)](#).

**30.26.3.5 int Fl\_File\_Input::value (const char \* *str*, int *len*)**

Sets the value of the widget given a new string value and its length.

Returns non 0 on success.

**Parameters:**

← *str* new string value

← *len* length of value

Reimplemented from [Fl\\_Input\\_](#).

References [Fl\\_Widget::damage\(\)](#), and [value\(\)](#).

**30.26.3.6 int Fl\_File\_Input::value (const char \* *str*)**

Sets the value of the widget given a new string value.

Returns non 0 on success.

**Parameters:**

← *str* new string value

Reimplemented from [Fl\\_Input\\_](#).

References [Fl\\_Widget::damage\(\)](#), and [value\(\)](#).

Referenced by [Fl\\_File\\_Chooser::count\(\)](#), [Fl\\_File\\_Chooser::rescan\(\)](#), [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#), and [Fl\\_File\\_Chooser::value\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_File\\_Input.H](#)
- [Fl\\_File\\_Input.cxx](#)

## 30.27 Fl\_Fill\_Dial Class Reference

Draws a dial with a filled arc.

```
#include <Fl_Fill_Dial.H>
```

Inheritance diagram for Fl\_Fill\_Dial::



### Public Member Functions

- [Fl\\_Fill\\_Dial \(int x, int y, int w, int h, const char \\*l=0\)](#)  
*Creates a filled dial, also setting its type to FL\_FILL\_DIAL.*

#### 30.27.1 Detailed Description

Draws a dial with a filled arc.

#### 30.27.2 Constructor & Destructor Documentation

##### 30.27.2.1 [Fl\\_Fill\\_Dial::Fl\\_Fill\\_Dial \(int x, int y, int w, int h, const char \\* l = 0\)](#) [inline]

Creates a filled dial, also setting its type to FL\_FILL\_DIAL.

References FL\_FILL\_DIAL, and Fl\_Widget::type().

The documentation for this class was generated from the following file:


- [Fl\\_Fill\\_Dial.H](#)

## 30.28 Fl\_Fill\_Slider Class Reference

Widget that draws a filled horizontal slider, useful as a progress or value meter.

```
#include <Fl_Fill_Slider.H>
```

Inheritance diagram for Fl\_Fill\_Slider::



### Public Member Functions

- [Fl\\_Fill\\_Slider](#) (int x, int y, int w, int h, const char \*l=0)  
*Creates the slider from its position,size and optional title.*

#### 30.28.1 Detailed Description

Widget that draws a filled horizontal slider, useful as a progress or value meter.

#### 30.28.2 Constructor & Destructor Documentation

##### 30.28.2.1 [Fl\\_Fill\\_Slider::Fl\\_Fill\\_Slider \(int x, int y, int w, int h, const char \\* l = 0\)](#) [inline]

Creates the slider from its position,size and optional title.

References Fl\_Widget::type().

The documentation for this class was generated from the following file:


- [Fl\\_Fill\\_Slider.H](#)

## 30.29 Fl\_Float\_Input Class Reference

The [Fl\\_Float\\_Input](#) class is a subclass of [Fl\\_Input](#) that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits).

```
#include <Fl_Float_Input.h>
```

Inheritance diagram for Fl\_Float\_Input::



### Public Member Functions

- [Fl\\_Float\\_Input](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Float\\_Input](#) widget using the given position, size, and label string.*

### 30.29.1 Detailed Description

The [Fl\\_Float\\_Input](#) class is a subclass of [Fl\\_Input](#) that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits).

### 30.29.2 Constructor & Destructor Documentation

#### 30.29.2.1 [Fl\\_Float\\_Input::Fl\\_Float\\_Input](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Float\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

Inherited destructor destroys the widget and any value associated with it

References [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl\\_Float\\_Input.H](#)

## 30.30 Fl\_Font\_Descriptor Class Reference

This a structure for an actual system font, with junk to help choose it and info on character sizes.

```
#include <Fl_Font.H>
```

### Public Attributes

- `Fl_Font_Descriptor * next`  
*linked list for this Fl\_Fontdesc*

#### 30.30.1 Detailed Description

This a structure for an actual system font, with junk to help choose it and info on character sizes.

Each Fl\_Fontdesc has a linked list of these. These are created the first time each system font/size combination is used.

The documentation for this class was generated from the following file:


- `Fl_Font.H`

## 30.31 Fl\_FormsBitmap Class Reference

Forms compatibility Bitmap Image Widget.

```
#include <Fl_FormsBitmap.H>
```

Inheritance diagram for Fl\_FormsBitmap::



### Public Member Functions

- **Fl\_FormsBitmap (Fl\_Boxtype, int, int, int, int, const char \*=0)**  
*Creates a bitmap widget from a box type, position, size and optional label specification.*
- void **set (int W, int H, const uchar \*bits)**  
*Sets a new bitmap bits with size W,H.*
- void **bitmap (Fl\_Bitmap \*B)**  
*Sets a new bitmap.*
- **Fl\_Bitmap \* bitmap () const**  
*Gets a the current associated [Fl\\_Bitmap](#) objects.*

### Protected Member Functions

- void **draw ()**  
*Draws the bitmap and its associated box.*

#### 30.31.1 Detailed Description

Forms compatibility Bitmap Image Widget.

#### 30.31.2 Member Function Documentation

##### 30.31.2.1 **Fl\_Bitmap\* Fl\_FormsBitmap::bitmap () const [inline]**

Gets a the current associated [Fl\\_Bitmap](#) objects.

Referenced by [set\(\)](#).

##### 30.31.2.2 **void Fl\_FormsBitmap::bitmap (Fl\_Bitmap \* B) [inline]**

Sets a new bitmap.

**30.31.2.3 void Fl\_FormsBitmap::draw (void) [protected, virtual]**

Draws the bitmap and its associated box.

Implements [Fl\\_Widget](#).

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Bitmap::draw\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Widget::draw\\_label\(\)](#), [fl\\_color\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

**30.31.2.4 void Fl\_FormsBitmap::set (int W, int H, const uchar \* bits)**

Sets a new bitmap bits with size W,H.

Deletes the previous one.

References [bitmap\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_FormsBitmap.H](#)
- [forms\\_bitmap.cxx](#)

## 30.32 Fl\_FormsPixmap Class Reference

Forms pixmap drawing routines.

```
#include <Fl_FormsPixmap.H>
```

Inheritance diagram for Fl\_FormsPixmap::



### Public Member Functions

- **Fl\_FormsPixmap (Fl\_Boxtype t, int X, int Y, int W, int H, const char \*L=0)**  
*Creates a new [Fl\\_FormsPixmap](#) widet using the given box type, position, size and label string.*
- void **set (char \*const \*bits)**  
*Set/create the internal pixmap using raw data.*
- void **Pixmap (Fl\_Pixmap \*B)**  
*Set the internal pixmap pointer to an existing pixmap.*
- **Fl\_Pixmap \* Pixmap () const**  
*Get the internal pixmap pointer.*

### Protected Member Functions

- void **draw ()**  
*Draw the widget.*

#### 30.32.1 Detailed Description

Forms pixmap drawing routines.

#### 30.32.2 Constructor & Destructor Documentation

##### 30.32.2.1 **Fl\_FormsPixmap::Fl\_FormsPixmap (Fl\_Boxtype t, int X, int Y, int W, int H, const char \* L = 0)**

Creates a new [Fl\\_FormsPixmap](#) widet using the given box type, position, size and label string.

#### Parameters:

← *t* box type

← *X,Y,W,H* position and size  
← *L* widget label, default is no label

References Fl\_Widget::align(), Fl\_Widget::box(), Fl\_Widget::color(), and FL\_ALIGN\_BOTTOM.

### 30.32.3 Member Function Documentation

#### 30.32.3.1 void Fl\_FormsPixmap::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References Fl\_Widget::box(), Fl\_Widget::color(), Fl\_Pixmap::draw(), Fl\_Widget::draw\_box(), Fl\_Widget::draw\_label(), fl\_color(), Fl\_Widget::h(), Fl\_Widget::selection\_color(), Fl\_Widget::w(), Fl\_Widget::x(), and Fl\_Widget::y().

#### 30.32.3.2 Fl\_Pixmap\* Fl\_FormsPixmap::Pixmap () const [inline]

Get the internal pixmap pointer.

#### 30.32.3.3 void Fl\_FormsPixmap::Pixmap (Fl\_Pixmap \**B*) [inline]

Set the internal pixmap pointer to an existing pixmap.

##### Parameters:

← *B* existing pixmap

#### 30.32.3.4 void Fl\_FormsPixmap::set (char \*const \**bits*)

Set/create the internal pixmap using raw data.

##### Parameters:

← *bits* raw data

The documentation for this class was generated from the following files:


- [Fl\\_FormsPixmap.H](#)
- formsPixmap.cxx

## 30.33 Fl\_Free Class Reference

Emulation of the Forms "free" widget.

```
#include <Fl_Free.H>
```

Inheritance diagram for Fl\_Free::



### Public Member Functions

- int [handle \(int e\)](#)  
*Handles the specified event.*
- [Fl\\_Free \(uchar t, int X, int Y, int W, int H, const char \\*L, FL\\_HANDLEPTR hdl\)](#)  
*Create a new [Fl\\_Free](#) widget with type, position, size, label and handler.*
- [~Fl\\_Free \(\)](#)  
*The destructor will call the handle function with the event [FL\\_FREE\\_MEM](#).*

### Protected Member Functions

- void [draw \(\)](#)  
*Draw the widget.*

#### 30.33.1 Detailed Description

Emulation of the Forms "free" widget.

This emulation allows the free demo to run, and appears to be useful for porting programs written in Forms which use the free widget or make subclasses of the Forms widgets.

There are five types of free, which determine when the handle function is called:

- [FL\\_NORMAL\\_FREE](#) normal event handling.
- [FL\\_SLEEPING\\_FREE](#) deactivates event handling (widget is inactive).
- [FL\\_INPUT\\_FREE](#) accepts [FL\\_FOCUS](#) events.
- [FL\\_CONTINUOUS\\_FREE](#) sets a timeout callback 100 times a second and provides an [FL\\_STEP](#) event. This has obvious detrimental effects on machine performance.
- [FL\\_ALL\\_FREE](#) same as [FL\\_INPUT\\_FREE](#) and [FL\\_CONTINUOUS\\_FREE](#).

### 30.33.2 Constructor & Destructor Documentation

#### 30.33.2.1 `Fl_Free::Fl_Free (uchar t, int X, int Y, int W, int H, const char * L, FL_HANDLEPTR hdl)`

Create a new `Fl_Free` widget with type, position, size, label and handler.

**Parameters:**

- ← *t* type
- ← *X,Y,W,H* position and size
- ← *L* widget label
- ← *hdl* handler function

The constructor takes both the type and the handle function. The handle function should be declared as follows:

```
int handle_function(Fl_Widget *w,
                  int event,
                  float event_x,
                  float event_y,
                  char key)
```

This function is called from the the `handle()` method in response to most events, and is called by the `draw()` method.

The event argument contains the event type:

```
// old event names for compatibility:
#define FL_MOUSE           FL_DRAG
#define FL_DRAW             0
#define FL_STEP              9
#define FL_FREEMEM          12
#define FL_FREEZE            FL_UNMAP
#define FL_THAW              FL_MAP
```

References `Fl::add_timeout()`, `FL_ALL_FREE`, `FL_CONTINUOUS_FREE`, `FL_SLEEPING_FREE`, `Fl_Widget::INACTIVE`, `Fl_Widget::set_flag()`, and `Fl_Widget::type()`.

### 30.33.3 Member Function Documentation

#### 30.33.3.1 `void Fl_Free::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `FL_DRAW`.

### 30.33.3.2 int Fl\_Free::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← *event* the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::do\\_callback\(\)](#), [Fl::event\\_button\(\)](#), [Fl::event\\_key\(\)](#), [Fl::event\\_x\(\)](#), [Fl::event\\_y\(\)](#), [FL\\_ALL\\_FREE](#), [FL\\_DRAG](#), [FL\\_FOCUS](#), [FL\\_INPUT\\_FREE](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [FL\\_SHORTCUT](#), and [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Free.H](#)
- forms\_free.cxx

## 30.34 Fl\_GIF\_Image Class Reference

The [Fl\\_GIF\\_Image](#) class supports loading, caching, and drawing of Compuserve GIF<sup>SM</sup> images.

```
#include <Fl_GIF_Image.h>
```

Inheritance diagram for Fl\_GIF\_Image::



### Public Member Functions

- [Fl\\_GIF\\_Image](#) (const char \*filename)  
*The constructor loads the named GIF image.*

#### 30.34.1 Detailed Description

The [Fl\\_GIF\\_Image](#) class supports loading, caching, and drawing of Compuserve GIF<sup>SM</sup> images.

The class loads the first image and supports transparency.

#### 30.34.2 Constructor & Destructor Documentation

##### 30.34.2.1 Fl\_GIF\_Image::Fl\_GIF\_Image (const char \* *infilename*)

The constructor loads the named GIF image.

The inherited destructor free all memory and server resources that are used by the image.

References [Fl\\_Image::d\(\)](#), [Fl\\_Image::data\(\)](#), [Fl::error](#), [Fl\\_Image::h\(\)](#), [Fl\\_Image::w\(\)](#), and [Fl::warning](#).

The documentation for this class was generated from the following files:


- [Fl\\_GIF\\_Image.H](#)
- [Fl\\_GIF\\_Image.cxx](#)

## 30.35 Fl\_Gl\_Window Class Reference

The [Fl\\_Gl\\_Window](#) widget sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws.

```
#include <Fl_Gl_Window.h>
```

Inheritance diagram for Fl\_Gl\_Window::

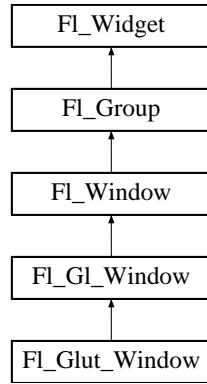

### Public Member Functions

- void [show \(\)](#)  
*Put the window on the screen.*
- void [show \(int a, char \\*\\*b\)](#)  
*See virtual void [Fl\\_Window::show\(\)](#).*
- void [flush \(\)](#)  
*Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).*
- void [hide \(\)](#)  
*Hides the window and destroys the OpenGL context.*
- void [resize \(int, int, int, int\)](#)  
*Changes the size and position of the window.*
- char [valid \(\) const](#)  
*Is turned off when FLTK creates a new context for this window or when the window resizes, and is turned on after [draw\(\)](#) is called.*
- void [valid \(char v\)](#)  
*See char [Fl\\_Gl\\_Window::valid\(\) const](#).*
- void [invalidate \(\)](#)  
*The [invalidate\(\)](#) method turns off [valid\(\)](#) and is equivalent to calling [value\(0\)](#).*
- char [context\\_valid \(\) const](#)  
*Will only be set if the OpenGL context is created or recreated.*

- void [context\\_valid](#) (char v)

*See char [Fl\\_Gl\\_Window::context\\_valid\(\)](#) const.*

- int [can\\_do](#) ()

*Returns non-zero if the hardware supports the given or current OpenGL mode.*

- Fl\_Mode [mode](#) () const

*Set or change the OpenGL capabilites of the window.*

- int [mode](#) (int a)

*See [Fl\\_Mode mode\(\)](#) const.*

- int [mode](#) (const int \*a)

*See [Fl\\_Mode mode\(\)](#) const.*

- void \* [context](#) () const

*void See void [context\(void\\* v, int destroy\\_flag\)](#)*

- void [context](#) (void \*, int destroy\_flag=0)

*Returns or sets a pointer to the GLContext that this window is using.*

- void [make\\_current](#) ()

*The [make\\_current\(\)](#) method selects the OpenGL context for the widget.*

- void [swap\\_buffers](#) ()

*The [swap\\_buffers\(\)](#) method swaps the back and front buffers.*

- void [ortho](#) ()

*Set the projection so 0,0 is in the lower left of the window and each pixel is 1 unit wide/tall.*

- int [can\\_do\\_overlay](#) ()

*Returns true if the hardware overlay is possible.*

- void [redraw\\_overlay](#) ()

*This method causes [draw\\_overlay](#) to be called at a later time.*

- void [hide\\_overlay](#) ()

*Hides the window if it is not this window, does nothing in WIN32.*

- void [make\\_overlay\\_current](#) ()

*The [make\\_overlay\\_current\(\)](#) method selects the OpenGL context for the widget's overlay.*

- [~Fl\\_Gl\\_Window](#) ()

*The destructor removes the widget and destroys the OpenGL context associated with it.*

- [Fl\\_Gl\\_Window](#) (int W, int H, const char \*l=0)

*Creates a new [Fl\\_Gl\\_Window](#) widget using the given size, and label string.*

- [Fl\\_Gl\\_Window](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Gl\\_Window](#) widget using the given position, size, and label string.*

- virtual void [draw\(\)](#)

*You must subclass [Fl\\_Gl\\_Window](#) and provide an implementation for [draw\(\)](#).*

## Static Public Member Functions

- static int [can\\_do](#) (int m)

*Returns non-zero if the hardware supports the given or current OpenGL mode.*

- static int [can\\_do](#) (const int \*m)

*Returns non-zero if the hardware supports the given or current OpenGL mode.*

## Friends

- class [\\_Fl\\_Gl\\_Overlay](#)

### 30.35.1 Detailed Description

The [Fl\\_Gl\\_Window](#) widget sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws.

[Fl\\_Gl\\_Window](#) also flushes the OpenGL streams and swaps buffers after [draw\(\)](#) returns.

OpenGL hardware typically provides some overlay bit planes, which are very useful for drawing UI controls atop your 3D graphics. If the overlay hardware is not provided, FLTK tries to simulate the overlay. This works pretty well if your graphics are double buffered, but not very well for single-buffered.

Please note that the FLTK drawing and clipping functions will not work inside an [Fl\\_Gl\\_Window](#). All drawing should be done using OpenGL calls exclusively. Even though [Fl\\_Gl\\_Window](#) is derived from [Fl\\_Group](#), it is not useful to add other FLTK Widgets as children, unless those Widgets are modified to draw using OpenGL calls.

### 30.35.2 Constructor & Destructor Documentation

#### 30.35.2.1 [Fl\\_Gl\\_Window::Fl\\_Gl\\_Window](#) (int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Gl\\_Window](#) widget using the given size, and label string.

The default boxtyle is [FL\\_NO\\_BOX](#). The default mode is [FL\\_RGB|FL\\_DOUBLE|FL\\_DEPTH](#).

#### 30.35.2.2 [Fl\\_Gl\\_Window::Fl\\_Gl\\_Window](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Gl\\_Window](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_NO\\_BOX](#). The default mode is [FL\\_RGB|FL\\_DOUBLE|FL\\_DEPTH](#).

### 30.35.3 Member Function Documentation

#### 30.35.3.1 int Fl\_Gl\_Window::can\_do () [inline]

Returns non-zero if the hardware supports the given or current OpenGL mode.

References can\_do().

Referenced by can\_do().

#### 30.35.3.2 static int Fl\_Gl\_Window::can\_do (const int \* m) [inline, static]

Returns non-zero if the hardware supports the given or current OpenGL mode.

References can\_do().

Referenced by can\_do().

#### 30.35.3.3 static int Fl\_Gl\_Window::can\_do (int m) [inline, static]

Returns non-zero if the hardware supports the given or current OpenGL mode.

References can\_do().

Referenced by can\_do().

#### 30.35.3.4 int Fl\_Gl\_Window::can\_do\_overlay ()

Returns true if the hardware overlay is possible.

If this is false, FLTK will try to simulate the overlay, with significant loss of update speed. Calling this will cause FLTK to open the display.

#### 30.35.3.5 void Fl\_Gl\_Window::context (void \* v, int destroy\_flag = 0)

Returns or sets a pointer to the GLContext that this window is using.

This is a system-dependent structure, but it is portable to copy the context from one window to another. You can also set it to NULL, which will force FLTK to recreate the context the next time [make\\_current\(\)](#) is called, this is useful for getting around bugs in OpenGL implementations.

If *destroy\_flag* is true the context will be destroyed by fltk when the window is destroyed, or when the mode() is changed, or the next time context(x) is called.

#### 30.35.3.6 char Fl\_Gl\_Window::context\_valid () const [inline]

Will only be set if the OpenGL context is created or recreated.

It differs from [Fl\\_Gl\\_Window::valid\(\)](#) which is also set whenever the context changes size.

Referenced by flush(), invalidate(), and make\_current().

#### 30.35.3.7 void Fl\_Gl\_Window::draw (void) [virtual]

You **must** subclass [Fl\\_Gl\\_Window](#) and provide an implementation for [draw\(\)](#).

You may also provide an implementation of `draw_overlay()` if you want to draw into the overlay planes. You can avoid reinitializing the viewport and lights and other things by checking `valid()` at the start of `draw()` and only doing the initialization if it is false.

The `draw()` method can *only* use OpenGL calls. Do not attempt to call X, any of the functions in <FL/fl-draw.H>, or glX directly. Do not call `gl_start()` or `gl_finish()`.

If double-buffering is enabled in the window, the back and front buffers are swapped after this function is completed.

Reimplemented from [Fl\\_Window](#).

Reimplemented in [Fl\\_Glut\\_Window](#).

References `Fl::fatal`.

Referenced by `flush()`.

### **30.35.3.8 void Fl\_Gl\_Window::flush () [virtual]**

Forces the window to be drawn, this window is also made current and calls `draw()`.

Reimplemented from [Fl\\_Window](#).

References `Fl_Widget::clear_damage()`, `context_valid()`, `Fl_Window::cursor()`, `Fl_Widget::damage()`, `draw()`, `Fl_Widget::h()`, `make_current()`, `swap_buffers()`, `valid()`, and `Fl_Widget::w()`.

### **30.35.3.9 void Fl\_Gl\_Window::make\_current ()**

The `make_current()` method selects the OpenGL context for the widget.

It is called automatically prior to the `draw()` method being called and can also be used to implement feedback and/or selection within the `handle()` method.

Reimplemented from [Fl\\_Window](#).

Reimplemented in [Fl\\_Glut\\_Window](#).

References `context_valid()`, `Fl_Window::current_`, `Fl_Widget::h()`, `valid()`, `Fl_Widget::w()`, `Fl_Widget::window()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `flush()`, and `make_overlay_current()`.

### **30.35.3.10 void Fl\_Gl\_Window::make\_overlay\_current ()**

The `make_overlay_current()` method selects the OpenGL context for the widget's overlay.

It is called automatically prior to the `draw_overlay()` method being called and can also be used to implement feedback and/or selection within the `handle()` method.

References `make_current()`.

### **30.35.3.11 Fl\_Mode Fl\_Gl\_Window::mode () const [inline]**

Set or change the OpenGL capabilites of the window.

The value can be any of the following OR'd together:

- `FL_RGB` - RGB color (not indexed)

- FL\_RGB8 - RGB color with at least 8 bits of each color
- FL\_INDEX - Indexed mode
- FL\_SINGLE - not double buffered
- FL\_DOUBLE - double buffered
- FL\_ACCUM - accumulation buffer
- FL\_ALPHA - alpha channel in color
- FL\_DEPTH - depth buffer
- FL\_STENCIL - stencil buffer
- FL\_MULTISAMPLE - multisample antialiasing

FL\_RGB and FL\_SINGLE have a value of zero, so they are "on" unless you give FL\_INDEX or FL\_DOUBLE.

If the desired combination cannot be done, FLTK will try turning off FL\_MULTISAMPLE. If this also fails the [show\(\)](#) will call [Fl::error\(\)](#) and not show the window.

You can change the mode while the window is displayed. This is most useful for turning double-buffering on and off. Under X this will cause the old X window to be destroyed and a new one to be created. If this is a top-level window this will unfortunately also cause the window to blink, raise to the top, and be de-iconized, and the [xid\(\)](#) will change, possibly breaking other code. It is best to make the GL window a child of another window if you wish to do this!

#### 30.35.3.12 void Fl\_Gl\_Window::ortho ()

Set the projection so 0,0 is in the lower left of the window and each pixel is 1 unit wide/tall.

If you are drawing 2D images, your [draw\(\)](#) method may want to call this if [valid\(\)](#) is false.

References [Fl\\_Widget::h\(\)](#), and [Fl\\_Widget::w\(\)](#).

#### 30.35.3.13 void Fl\_Gl\_Window::redraw\_overlay ()

This method causes [draw\\_overlay](#) to be called at a later time.

Initially the overlay is clear, if you want the window to display something in the overlay when it first appears, you must call this immediately after you [show\(\)](#) your window.

References [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::redraw\(\)](#), and [Fl\\_Window::shown\(\)](#).

#### 30.35.3.14 void Fl\_Gl\_Window::resize (int, int, int, int) [virtual]

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl\\_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl\\_Widget](#) methods [size\(x,y\)](#) and [position\(w,h\)](#), which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl\\_Window](#).

References [Fl\\_Widget::h\(\)](#), [Fl\\_Group::resizable\(\)](#), [valid\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

### **30.35.3.15 void Fl\_Gl\_Window::show () [virtual]**

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl\\_Window](#).

References [Fl::error](#), [Fl\\_Group::find\(\)](#), [Fl\\_Widget::set\\_visible\(\)](#), and [Fl\\_Window::shown\(\)](#).

### **30.35.3.16 void Fl\_Gl\_Window::swap\_buffers ()**

The [swap\\_buffers\(\)](#) method swaps the back and front buffers.

It is called automatically after the [draw\(\)](#) method is called.

Referenced by [flush\(\)](#).

### **30.35.3.17 char Fl\_Gl\_Window::valid () const [inline]**

Is turned off when FLTK creates a new context for this window or when the window resizes, and is turned on *after* [draw\(\)](#) is called.

You can use this inside your [draw\(\)](#) method to avoid unnecessarily initializing the OpenGL context. Just do this:

```
void mywindow::draw() {
    if (!valid()) {
        glViewport(0, 0, w(), h());
        glFrustum(...);
        ...other initialization...
    }
    if (!context_valid()) {
        ...load textures, etc. ...
    }
    ... draw your geometry here ...
}
```

You can turn [valid\(\)](#) on by calling [valid\(1\)](#). You should only do this after fixing the transformation inside a [draw\(\)](#) or after [make\\_current\(\)](#). This is done automatically after [draw\(\)](#) returns.

Referenced by [Fl\\_Glut\\_Window::draw\(\)](#), [Fl\\_Glut\\_Window::draw\\_overlay\(\)](#), [flush\(\)](#), [invalidate\(\)](#), [make\\_current\(\)](#), and [resize\(\)](#).

The documentation for this class was generated from the following files:

- [Fl\\_Gl\\_Window.H](#)
- [Fl\\_Gl\\_Overlay.cxx](#)
- [Fl\\_Gl\\_Window.cxx](#)

## 30.36 Fl\_Glut\_Bitmap\_Font Struct Reference

fltk glut font/size attributes used in the glutXXX functions

```
#include <glut.H>
```

### Public Attributes

- [Fl\\_Font font](#)
- [Fl\\_Fontsize size](#)

#### 30.36.1 Detailed Description

fltk glut font/size attributes used in the glutXXX functions

The documentation for this struct was generated from the following file:


- [glut.H](#)

## 30.37 Fl\_Glut\_Window Class Reference

GLUT is emulated using this window class and these static variables (plus several more static variables hidden in glut\_compatibility.cxx):.

```
#include <glut.h>
```

Inheritance diagram for Fl\_Glut\_Window::

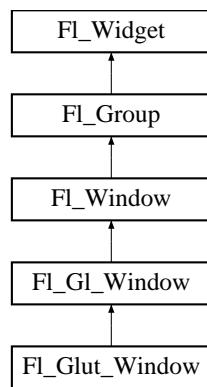

### Public Member Functions

- void [make\\_current \(\)](#)  
*The [make\\_current\(\)](#) method selects the OpenGL context for the widget.*
- [Fl\\_Glut\\_Window \(int w, int h, const char \\*\)](#)  
*Creates a glut windows, registers to the glut windows list.*
- [Fl\\_Glut\\_Window \(int x, int y, int w, int h, const char \\*\)](#)  
*Creates a glut windows, registers to the glut windows list.*
- [~Fl\\_Glut\\_Window \(\)](#)  
*Destroys the glut window, first unregister it from the glut windows list.*

### Public Attributes

- int **number**
- int **menu** [3]
- void(\* **display**)()
- void(\* **overlaydisplay**)()
- void(\* **reshape**)(int w, int h)
- void(\* **keyboard**)(uchar, int x, int y)
- void(\* **mouse**)(int b, int state, int x, int y)
- void(\* **motion**)(int x, int y)
- void(\* **passivemotion**)(int x, int y)
- void(\* **entry**)(int)
- void(\* **visibility**)(int)
- void(\* **special**)(int, int x, int y)

## Protected Member Functions

- void `draw ()`

*You must subclass `Fl_Gl_Window` and provide an implementation for `draw()`.*

- void `draw_overlay ()`

*You must implement this virtual function if you want to draw into the overlay.*

- int `handle (int)`

*Handles the specified event.*

### 30.37.1 Detailed Description

GLUT is emulated using this window class and these static variables (plus several more static variables hidden in `glut_compatibility.cxx`):.

### 30.37.2 Constructor & Destructor Documentation

#### 30.37.2.1 `Fl_Glut_Window::Fl_Glut_Window (int W, int H, const char * t)`

Creates a glut windows, registers to the glut windows list.

#### 30.37.2.2 `Fl_Glut_Window::Fl_Glut_Window (int X, int Y, int W, int H, const char * t)`

Creates a glut windows, registers to the glut windows list.

### 30.37.3 Member Function Documentation

#### 30.37.3.1 `void Fl_Glut_Window::draw (void) [protected, virtual]`

You **must** subclass `Fl_Gl_Window` and provide an implementation for `draw()`.

You may also provide an implementation of `draw_overlay()` if you want to draw into the overlay planes. You can avoid reinitializing the viewport and lights and other things by checking `valid()` at the start of `draw()` and only doing the initialization if it is false.

The `draw()` method can *only* use OpenGL calls. Do not attempt to call X, any of the functions in `<FL/fl_draw.H>`, or glX directly. Do not call `gl_start()` or `gl_finish()`.

If double-buffering is enabled in the window, the back and front buffers are swapped after this function is completed.

Reimplemented from `Fl_Gl_Window`.

References `Fl_Widget::h()`, `Fl_Gl_Window::valid()`, and `Fl_Widget::w()`.

#### 30.37.3.2 `void Fl_Glut_Window::draw_overlay () [protected, virtual]`

You must implement this virtual function if you want to draw into the overlay.

The overlay is cleared before this is called. You should draw anything that is not clear using OpenGL. You must use `gl_color(i)` to choose colors (it allocates them from the colormap using system-specific calls), and remember that you are in an indexed OpenGL mode and drawing anything other than flat-shaded will probably not work.

Both this function and `Fl_Gl_Window::draw()` should check `Fl_Gl_Window::valid()` and set the same transformation. If you don't your code may not work on other systems. Depending on the OS, and on whether overlays are real or simulated, the OpenGL context may be the same or different between the overlay and main window.

Reimplemented from `Fl_Gl_Window`.

References `Fl_Widget::h()`, `Fl_Gl_Window::valid()`, and `Fl_Widget::w()`.

### 30.37.3.3 int Fl\_Glut\_Window::handle (int *event*) [protected, virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← *event* the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from `Fl_Window`.

References `Fl::event_button()`, `Fl::event_dy()`, `Fl::event_key()`, `Fl::event_text()`, `Fl::event_x()`, `Fl::event_y()`, `FL_DRAG`, `FL_ENTER`, `FL_F`, `FL_F_Last`, `FL_FOCUS`, `FL_HIDE`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_MOUSEWHEEL`, `FL_MOVE`, `FL_PUSH`, `FL_RELEASE`, `FL_SHORTCUT`, `FL_SHOW`, `Fl_Group::focus()`, and `make_current()`.

### 30.37.3.4 void Fl\_Glut\_Window::make\_current ()

The `make_current()` method selects the OpenGL context for the widget.

It is called automatically prior to the `draw()` method being called and can also be used to implement feed-back and/or selection within the `handle()` method.

Reimplemented from `Fl_Gl_Window`.

References `Fl_Window::shown()`.

Referenced by `handle()`.

The documentation for this class was generated from the following files:


- glut.H
- glut\_compatibility.cxx

## 30.38 Fl\_Group Class Reference

The [Fl\\_Group](#) class is the FLTK container widget.

```
#include <Fl_Group.H>
```

Inheritance diagram for Fl\_Group::

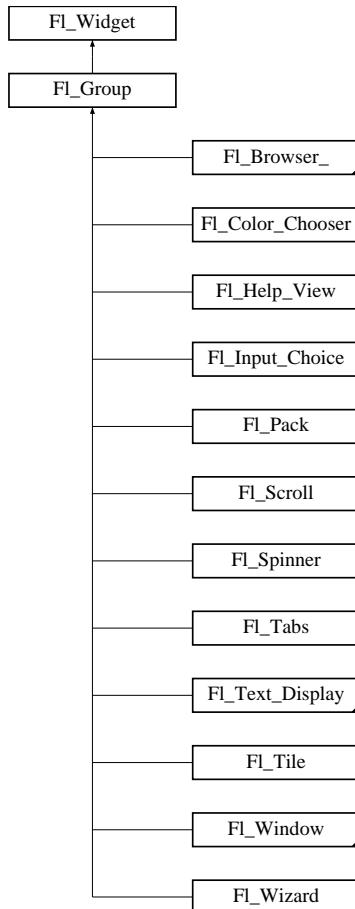

### Public Member Functions

- int [handle](#) (int)

*Handles the specified event.*

- void [begin](#) ()

*Sets the current group so you can build the widget tree by just constructing the widgets.*

- void [end](#) ()

*Exactly the same as `current(this->parent())`.*

- int [children](#) () const

*Returns how many child widgets the group has.*

- **Fl\_Widget \* child** (int n) const  
*Returns array()[n].*
- int **find** (const Fl\_Widget \*) const  
*Searches the child array for the widget and returns the index.*
- int **find** (const Fl\_Widget &o) const  
*See int Fl\_Group::find(const Fl\_Widget \*w) const.*
- **Fl\_Widget \*const \* array** () const  
*Returns a pointer to the array of children.*
- void **resize** (int, int, int, int)  
*This resizes the Fl\_Group widget and all of its children.*
- **Fl\_Group** (int, int, int, int, const char \*=0)  
*Creates a new Fl\_Group widget using the given position, size, and label string.*
- virtual **~Fl\_Group** ()  
*The destructor also deletes all the children.*
- void **add** (Fl\_Widget &)  
*The widget is removed from it's current group (if any) and then added to the end of this group.*
- void **add** (Fl\_Widget \*o)  
*See void Fl\_Group::add(Fl\_Widget &w).*
- void **insert** (Fl\_Widget &, int i)  
*The widget is removed from it's current group (if any) and then inserted into this group.*
- void **insert** (Fl\_Widget &o, Fl\_Widget \*before)  
*This does insert(w, find(beforethis)).*
- void **remove** (Fl\_Widget &)  
*Removes a widget from the group but does not delete it.*
- void **remove** (Fl\_Widget \*o)  
*Removes the widget o from the group.*
- void **clear** ()  
*The clear() method deletes all child widgets from memory recursively.*
- void **resizable** (Fl\_Widget &o)  
*See void Fl\_Group::resizable(Fl\_Widget \*box).*
- void **resizable** (Fl\_Widget \*o)  
*The resizable widget defines the resizing box for the group.*
- **Fl\_Widget \* resizable** () const  
*See void Fl\_Group::resizable(Fl\_Widget \*box).*

- void [add\\_resizable \(Fl\\_Widget &o\)](#)  
*Adds a widget to the group and makes it the resizable widget.*
- void [init\\_sizes \(\)](#)  
*This resets the internal array of widget sizes and positions.*
- void [focus \(Fl\\_Widget \\*W\)](#)
- [Fl\\_Widget \\*& \\_ddfdesign\\_kludge \(\)](#)  
*This is for forms compatibility only.*
- void [forms\\_end \(\)](#)  
*This is for forms compatibility only.*

## Static Public Member Functions

- static [Fl\\_Group \\* current \(\)](#)  
*Returns the currently active group.*
- static void [current \(Fl\\_Group \\*g\)](#)  
*See static [Fl\\_Group \\*Fl\\_Group::current\(\)](#).*

## Protected Types

- enum { **CLIP\_CHILDREN** = 2048 }

## Protected Member Functions

- void [clip\\_children \(int c\)](#)  
*The first method controls whether the group widget clips the drawing of child widgets to its bounding box.*
- int [clip\\_children \(\)](#)  
*See void [Fl\\_Group::clip\\_children\(int c\)](#).*
- void [draw \(\)](#)  
*Draw the widget.*
- void [draw\\_child \(Fl\\_Widget &\) const](#)  
*Forces a child to redraw.*
- void [draw\\_children \(\)](#)  
*This draws all children of the group.*
- void [draw\\_outside\\_label \(const Fl\\_Widget &\) const](#)  
*Parents normally call this to draw outside labels of child widgets.*
- void [update\\_child \(Fl\\_Widget &\) const](#)

*Draws a child only if it needs it.*

- `int * sizes ()`

*This returns the internal array of widget sizes and positions.*

### 30.38.1 Detailed Description

The [Fl\\_Group](#) class is the FLTK container widget.

It maintains an array of child widgets. These children can themselves be any widget including [Fl\\_Group](#). The most important subclass of [Fl\\_Group](#) is [Fl\\_Window](#), however groups can also be used to control radio buttons or to enforce resize behavior.

### 30.38.2 Constructor & Destructor Documentation

#### 30.38.2.1 `Fl_Group::Fl_Group (int X, int Y, int W, int H, const char * l = 0)`

Creates a new [Fl\\_Group](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

References `Fl_Widget::align()`, `begin()`, and `FL_ALIGN_TOP`.

#### 30.38.2.2 `Fl_Group::~Fl_Group () [virtual]`

The destructor *also deletes all the children*.

This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl\\_Group](#) and all of its children can be automatic (local) variables, but you must declare the [Fl\\_Group](#) *first*, so that it is destroyed last.

References `clear()`.

### 30.38.3 Member Function Documentation

#### 30.38.3.1 `Fl_Widget *const * Fl_Group::array () const`

Returns a pointer to the array of children.

*This pointer is only valid until the next time a child is added or removed.*

Referenced by `clear()`, `Fl_Tabs::draw()`, `Fl_Scroll::draw()`, `Fl_Pack::draw()`, `draw_children()`, `find()`, `forms_end()`, `Fl_Tile::handle()`, `handle()`, `Fl_Wizard::next()`, `Fl_Tile::position()`, `Fl_Wizard::prev()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `resize()`, `Fl_Scroll::scroll_to()`, `Fl_Button::setonly()`, `sizes()`, `Fl_Wizard::value()`, and `Fl_Tabs::value()`.

#### 30.38.3.2 `void Fl_Group::begin ()`

Sets the current group so you can build the widget tree by just constructing the widgets.

`begin()` is automatically called by the constructor for [Fl\\_Group](#) (and thus for [Fl\\_Window](#) as well). `begin()` is exactly the same as `current(this)`.

*Don't forget to [end\(\)](#) the group or window!*

Referenced by [Fl\\_Group\(\)](#).

### 30.38.3.3 Fl\_Widget\* Fl\_Group::child (int n) const [inline]

Returns [array\(\)](#)[n].

*No range checking is done!*

Referenced by [Fl\\_Scroll::clear\(\)](#), [Fl\\_Pack::draw\(\)](#), and [Fl\\_Tabs::handle\(\)](#).

### 30.38.3.4 void Fl\_Group::clear ()

The [clear\(\)](#) method deletes all child widgets from memory recursively.

This method differs from the [remove\(\)](#) method in that it affects all child widgets and deletes them from memory.

Reimplemented in [Fl\\_Browser](#), [Fl\\_Check\\_Browser](#), [Fl\\_Input\\_Choice](#), and [Fl\\_Scroll](#).

References [array\(\)](#), [children\(\)](#), [init\\_sizes\(\)](#), and [Fl\\_Widget::parent\(\)](#).

Referenced by [Fl\\_Browser::~Fl\\_Browser\(\)](#), [Fl\\_Check\\_Browser::~Fl\\_Check\\_Browser\(\)](#), and [~Fl\\_Group\(\)](#).

### 30.38.3.5 void Fl\_Group::clip\_children (int c) [inline, protected]

The first method controls whether the group widget clips the drawing of child widgets to its bounding box.

The second method returns the current clipping mode.

The default is to not clip (0) the drawing of child widgets.

References [Fl\\_Widget::clear\\_flag\(\)](#), and [Fl\\_Widget::set\\_flag\(\)](#).

### 30.38.3.6 Fl\_Group \* Fl\_Group::current () [static]

Returns the currently active group.

The [Fl\\_Widget](#) constructor automatically does [current\(\)>add\(widget\)](#) if this is not null. To prevent new widgets from being added to a group, call [Fl\\_Group::current\(0\)](#).

Reimplemented in [Fl\\_Window](#).

Referenced by [Fl\\_End::Fl\\_End\(\)](#), [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), [Fl\\_Help\\_Dialog::Fl\\_Help\\_Dialog\(\)](#), [Fl\\_Widget::Fl\\_Widget\(\)](#), [Fl\\_Tabs::handle\(\)](#), and [Fl\\_Menu\\_Item::popup\(\)](#).

### 30.38.3.7 void Fl\_Group::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

Reimplemented in [Fl\\_Browser\\_](#), [Fl\\_Cairo\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Pack](#), [Fl\\_Scroll](#), [Fl\\_Tabs](#), [Fl\\_Text\\_Display](#), [Fl\\_Window](#), and [Fl\\_Glut\\_Window](#).

References [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [draw\\_children\(\)](#), and [Fl\\_Widget::draw\\_label\(\)](#).

### **30.38.3.8 void Fl\_Group::draw\_child (Fl\_Widget & widget) const [protected]**

Forces a child to redraw.

This draws a child widget, if it is not clipped. The damage bits are cleared after drawing.

References [Fl\\_Widget::clear\\_damage\(\)](#), [Fl\\_Widget::draw\(\)](#), [fl\\_not\\_clipped\(\)](#), [FL\\_WINDOW](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Widget::visible\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [Fl\\_Tabs::draw\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), and [draw\\_children\(\)](#).

### **30.38.3.9 void Fl\_Group::draw\_children () [protected]**

This draws all children of the group.

This is useful, if you derived a widget from [Fl\\_Group](#) and want to draw a special border or background. You can call [draw\\_children\(\)](#) from the derived [draw\(\)](#) method after drawing the box, border, or background.

References [array\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [clip\\_children\(\)](#), [Fl\\_Widget::damage\(\)](#), [draw\\_child\(\)](#), [draw\\_outside\\_label\(\)](#), [fl\\_pop\\_clip\(\)](#), [fl\\_push\\_clip\(\)](#), [Fl\\_Widget::h\(\)](#), [update\\_child\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [draw\(\)](#).

### **30.38.3.10 void Fl\_Group::draw\_outside\_label (const Fl\_Widget & widget) const [protected]**

Parents normally call this to draw outside labels of child widgets.

References [Fl\\_Widget::align\(\)](#), [Fl\\_Widget::draw\\_label\(\)](#), [FL\\_ALIGN\\_BOTTOM](#), [FL\\_ALIGN\\_INSIDE](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_ALIGN\\_RIGHT](#), [FL\\_ALIGN\\_TOP](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::visible\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [Fl\\_Pack::draw\(\)](#), and [draw\\_children\(\)](#).

### **30.38.3.11 void Fl\_Group::end ()**

*Exactly the same as current(this->parent())*.

Any new widgets added to the widget tree will be added to the parent of the group.

References [Fl\\_Widget::parent\(\)](#).

Referenced by [Fl\\_Browser\\_::Fl\\_Browser\\_\(\)](#), [Fl\\_Color\\_Chooser::fl\\_color\\_chooser\(\)](#), [Fl\\_Color\\_Chooser::Fl\\_Color\\_Chooser\(\)](#), [Fl\\_End::Fl\\_End\(\)](#), [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), [Fl\\_Help\\_Dialog::Fl\\_Help\\_Dialog\(\)](#), [Fl\\_Help\\_View::Fl\\_Help\\_View\(\)](#), [Fl\\_Input\\_Choice::Fl\\_Input\\_Choice\(\)](#), [Fl\\_Spinner::Fl\\_Spinner\(\)](#), [Fl\\_Text\\_Display::Fl\\_Text\\_Display\(\)](#), [forms\\_end\(\)](#), and [Fl\\_Text\\_Display::handle\(\)](#).

### **30.38.3.12 int Fl\_Group::find (const Fl\_Widget \* o) const**

Searches the child array for the widget and returns the index.

Returns [children\(\)](#) if the widget is NULL or not found.

References [array\(\)](#).

Referenced by [insert\(\)](#), [Fl\\_File\\_Browser::load\(\)](#), [remove\(\)](#), and [Fl\\_Gl\\_Window::show\(\)](#).

### 30.38.3.13 void Fl\_Group::focus (Fl\_Widget \* W) [inline]

#### Deprecated

This is for backwards compatibility only. You should use *W->take\_focus()* instead.

#### See also:

[Fl\\_Widget::take\\_focus\(\)](#);

References [Fl\\_Widget::take\\_focus\(\)](#).

Referenced by [Fl\\_Glut\\_Window::handle\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Tabs::handle\(\)](#), [handle\(\)](#), and [Fl\\_Browser\\_::handle\(\)](#).

### 30.38.3.14 int Fl\_Group::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← *event* the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Browser\\_](#), [Fl\\_Check\\_Browser](#), [Fl\\_Scroll](#), [Fl\\_Spinner](#), [Fl\\_Tabs](#), [Fl\\_Text\\_Display](#), [Fl\\_Text\\_Editor](#), [Fl\\_Tile](#), [Fl\\_Window](#), and [Fl\\_Glut\\_Window](#).

References [Fl\\_Widget::active\(\)](#), [array\(\)](#), [Fl::belowmouse\(\)](#), [children\(\)](#), [Fl\\_Widget::contains\(\)](#), [Fl::event\\_inside\(\)](#), [Fl::event\\_key\(\)](#), [FL\\_ACTIVATE](#), [FL\\_DEACTIVATE](#), [FL\\_DND\\_DRAG](#), [FL\\_DND\\_ENTER](#), [FL\\_Down](#), [FL\\_DRAG](#), [FL\\_ENTER](#), [FL\\_Enter](#), [FL\\_FOCUS](#), [FL\\_HIDE](#), [FL\\_KEYBOARD](#), [FL\\_KP\\_Enter](#), [FL\\_Left](#), [FL\\_MOUSEWHEEL](#), [FL\\_MOVE](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [FL\\_Right](#), [FL\\_SHORTCUT](#), [FL\\_SHOW](#), [FL\\_UNFOCUS](#), [FL\\_Up](#), [focus\(\)](#), [Fl::focus\(\)](#), [Fl\\_Widget::handle\(\)](#), [Fl::pushed\(\)](#), [Fl\\_Widget::take\\_focus\(\)](#), [Fl\\_Widget::takesevents\(\)](#), and [Fl\\_Widget::visible\(\)](#).

Referenced by [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Text\\_Display::handle\(\)](#), and [Fl\\_Browser\\_::handle\(\)](#).

**30.38.3.15 void Fl\_Group::init\_sizes ()**

This resets the internal array of widget sizes and positions.

The [Fl\\_Group](#) widget keeps track of the original widget sizes and positions when resizing occurs so that if you resize a window back to its original size the widgets will be in the correct places. If you rearrange the widgets in your group, call this method to register the new arrangement with the [Fl\\_Group](#) that contains them.

If you add or remove widgets, this will be done automatically.

**Note:**

The internal array of widget sizes and positions will be allocated and filled when the next [resize\(\)](#) occurs.

**See also:**

[sizes\(\)](#)

Referenced by [clear\(\)](#), [insert\(\)](#), [Fl\\_File\\_Chooser::ok\\_label\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), and [remove\(\)](#).

**30.38.3.16 void Fl\_Group::insert (Fl\_Widget & o, Fl\_Widget \* before) [inline]**

This does insert(w, find(beforethis)).

This will append the widget if beforethis is not in the group.

References [insert\(\)](#).

Referenced by [insert\(\)](#).

**30.38.3.17 void Fl\_Group::insert (Fl\_Widget & o, int index)**

The widget is removed from it's current group (if any) and then inserted into this group.

It is put at index n (or at the end if n >= [children\(\)](#)). This can also be used to rearrange the widgets inside a group.

References [find\(\)](#), [init\\_sizes\(\)](#), [Fl\\_Widget::parent\(\)](#), [Fl\\_Widget::parent\\_](#), and [remove\(\)](#).

Referenced by [add\(\)](#).

**30.38.3.18 void Fl\_Group::remove (Fl\_Widget \* o) [inline]**

Removes the widget o from the group.

**See also:**

[void remove\(Fl\\_Widget&\)](#)

**30.38.3.19 void Fl\_Group::remove (Fl\_Widget & o)**

Removes a widget from the group but does not delete it.

This method does nothing if the widget is not a child of the group.

This method differs from the [clear\(\)](#) method in that it only affects a single widget and does not delete it from memory.

References [find\(\)](#), [init\\_sizes\(\)](#), and [Fl\\_Widget::parent\\_](#).

Referenced by [Fl\\_File\\_Chooser::add\\_extra\(\)](#), [insert\(\)](#), and [Fl\\_File\\_Chooser::~Fl\\_File\\_Chooser\(\)](#).

### 30.38.3.20 void Fl\_Group::resizable (Fl\_Widget \*o) [inline]

The resizable widget defines the resizing box for the group.

When the group is resized it calculates a new size and position for all of its children. Widgets that are horizontally or vertically inside the dimensions of the box are scaled to the new size. Widgets outside the box are moved.

In these examples the gray area is the resizable:




Figure 30.14: before resize

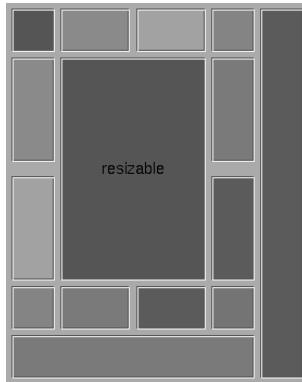


Figure 30.15: after resize

The resizable may be set to the group itself (this is the default value for an [Fl\\_Group](#), although NULL is the default for [Fl\\_Window](#) and [Fl\\_Pack](#)), in which case all the contents are resized. If the resizable is NULL then all widgets remain a fixed size and distance from the top-left corner.

It is possible to achieve any type of resize behavior by using an invisible [Fl\\_Box](#) as the resizable and/or by using a hierarchy of child [Fl\\_Group](#)'s.

**30.38.3.21 void Fl\_Group::resize (int X, int Y, int W, int H) [virtual]**

This resizes the [Fl\\_Group](#) widget and all of its children.

The [Fl\\_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for [Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)

**See also:**

[Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)  
[Fl\\_Group::resizable\(\)](#)  
[Fl\\_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Browser\\_](#), [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Help\\_View](#), [Fl\\_Input\\_Choice](#), [Fl\\_Overlay\\_Window](#), [Fl\\_Scroll](#), [Fl\\_Spinner](#), [Fl\\_Text\\_Display](#), [Fl\\_Tile](#), and [Fl\\_Window](#).

References [array\(\)](#), [FL\\_WINDOW](#), [Fl\\_Widget::h\(\)](#), [resizable\(\)](#), [Fl\\_Widget::resize\(\)](#), [sizes\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [Fl\\_Pack::draw\(\)](#), [Fl\\_Color\\_Chooser::Fl\\_Color\\_Chooser\(\)](#), [Fl\\_Widget::position\(\)](#), and [Fl\\_Widget::size\(\)](#).

**30.38.3.22 int \* Fl\_Group::sizes () [protected]**

This returns the internal array of widget sizes and positions.

If the [sizes\(\)](#) array does not exist, it will be allocated and filled with the current widget sizes and positions.

**Note:**

You should never need to use this method directly, unless you have special needs to rearrange the children of a [Fl\\_Group](#). [Fl\\_Tile](#) uses this to rearrange its widget positions.

**Todo**

should the internal representation of the [sizes\(\)](#) array be documented?

References [array\(\)](#), [FL\\_WINDOW](#), [Fl\\_Widget::h\(\)](#), [resizable\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [Fl\\_Tile::handle\(\)](#), [Fl\\_Tile::position\(\)](#), [Fl\\_Tile::resize\(\)](#), and [resize\(\)](#).

**30.38.3.23 void Fl\_Group::update\_child (Fl\_Widget & widget) const [protected]**

Draws a child only if it needs it.

This draws a child widget, if it is not clipped *and* if any [damage\(\)](#) bits are set. The damage bits are cleared after drawing.

**See also:**

[Fl\\_Group::draw\\_child\(Fl\\_Widget& widget\) const](#)

References [Fl\\_Widget::clear\\_damage\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\(\)](#), [fl\\_not\\_clipped\(\)](#), [FL\\_WINDOW](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Widget::visible\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by Fl\_Text\_Display::draw(), Fl\_Tabs::draw(), Fl\_Scroll::draw(), Fl\_Pack::draw(), Fl\_Browser\_::draw(), and draw\_children().

The documentation for this class was generated from the following files:

- [Fl\\_Group.H](#)
- Fl\_Group.cxx
- forms\_compatibility.cxx

## 30.39 Fl\_Help\_Dialog Class Reference

The [Fl\\_Help\\_Dialog](#) widget displays a standard help dialog window using the [Fl\\_Help\\_View](#) widget.

### Public Member Functions

- [Fl\\_Help\\_Dialog \(\)](#)

*The constructor creates the dialog pictured above.*

- [~Fl\\_Help\\_Dialog \(\)](#)

*The destructor destroys the widget and frees all memory that has been allocated for the current file.*

- [int h \(\)](#)

*Returns the position and size of the help dialog.*

- [void hide \(\)](#)

*Hides the [Fl\\_Help\\_Dialog](#) window.*

- [void load \(const char \\*f\)](#)

*Loads the specified HTML file into the [Fl\\_Help\\_View](#) widget.*

- [void position \(int xx, int yy\)](#)

*Set the screen position of the dialog.*

- [void resize \(int xx, int yy, int ww, int hh\)](#)

*Change the position and size of the dialog.*

- [void show \(\)](#)

*Shows the [Fl\\_Help\\_Dialog](#) window.*

- [void show \(int argc, char \\*\\*argv\)](#)

*Shows the main Help Dialog Window Delegates call to encapsulated window\_ void [Fl\\_Window::show\(int argc, char \\*\\*argv\)](#) instance method.*

- [void fontsize \(Fl\\_Fontsize s\)](#)

*Sets or gets the default text size for the help view.*

- [Fl\\_Fontsize fontsize \(\)](#)

*Sets or gets the default text size for the help view.*

- [void topline \(const char \\*n\)](#)

*Sets the top line in the [Fl\\_Help\\_View](#) widget to the named or numbered line.*

- [void topline \(int n\)](#)

*Sets the top line in the [Fl\\_Help\\_View](#) widget to the named or numbered line.*

- [void value \(const char \\*f\)](#)

*The first form sets the current buffer to the string provided and reformats the text.*

- const char \* [value \(\) const](#)

*The first form sets the current buffer to the string provided and reformats the text.*

- int [visible \(\)](#)

*Returns 1 if the [Fl\\_Help\\_Dialog](#) window is visible.*

- int [w \(\)](#)

*Returns the position and size of the help dialog.*

- int [x \(\)](#)

*Returns the position and size of the help dialog.*

- int [y \(\)](#)

*Returns the position and size of the help dialog.*

### 30.39.1 Detailed Description

The [Fl\\_Help\\_Dialog](#) widget displays a standard help dialog window using the [Fl\\_Help\\_View](#) widget.

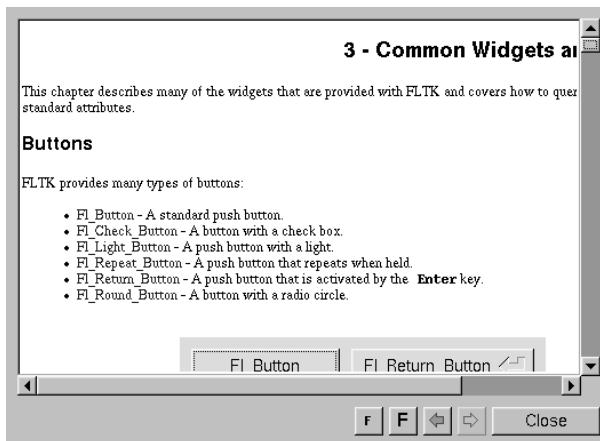


Figure 30.16: Fl\_Help\_Dialog

### 30.39.2 Constructor & Destructor Documentation

#### 30.39.2.1 Fl\_Help\_Dialog::Fl\_Help\_Dialog()

The constructor creates the dialog pictured above.

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::callback\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Group::current\(\)](#), [Fl\\_Widget::deactivate\(\)](#), [Fl\\_Group::end\(\)](#), [FL\\_BACKGROUND2\\_COLOR](#), [FL\\_DOWN\\_BOX](#), [FL\\_FLAT\\_BOX](#), [FL\\_WHEN\\_ENTER\\_KEY\\_ALWAYS](#), [Fl\\_Widget::labelcolor\(\)](#), [Fl\\_Widget::labelfont\(\)](#), [Fl\\_Widget::labelsize\(\)](#), [Fl\\_Group::resizable\(\)](#), [Fl\\_Button::shortcut\(\)](#), [Fl\\_Window::size\\_range\(\)](#), [Fl\\_Input::textfont\(\)](#), [Fl\\_Widget::tooltip\(\)](#), [Fl\\_Widget::user\\_data\(\)](#), and [Fl\\_Widget::when\(\)](#).

### 30.39.3 Member Function Documentation

#### 30.39.3.1 int Fl\_Help\_Dialog::h()

Returns the position and size of the help dialog.

References Fl\_Widget::h().

#### 30.39.3.2 void Fl\_Help\_Dialog::hide()

Hides the [Fl\\_Help\\_Dialog](#) window.

References Fl\_Double\_Window::hide().

#### 30.39.3.3 void Fl\_Help\_Dialog::load (const char \**f*)

Loads the specified HTML file into the [Fl\\_Help\\_View](#) widget.

The filename can also contain a target name ("filename.html#target").

References Fl\_Window::label(), Fl\_Help\_View::load(), Fl\_Widget::set\_changed(), and Fl\_Help\_View::title().

#### 30.39.3.4 void Fl\_Help\_Dialog::position (int *x*, int *y*)

Set the screen position of the dialog.

References Fl\_Widget::position().

#### 30.39.3.5 void Fl\_Help\_Dialog::resize (int *xx*, int *yy*, int *ww*, int *hh*)

Change the position and size of the dialog.

References Fl\_Double\_Window::resize().

#### 30.39.3.6 void Fl\_Help\_Dialog::show()

Shows the [Fl\\_Help\\_Dialog](#) window.

Shows the main Help Dialog Window Delegates call to encapsulated window\_ void [Fl\\_Window::show\(\)](#) method.

References Fl\_Double\_Window::show().

#### 30.39.3.7 uchar Fl\_Help\_Dialog::textsize()

Sets or gets the default text size for the help view.

References Fl\_Help\_View::textsize().

#### 30.39.3.8 void Fl\_Help\_Dialog::textsize (Fl\_Fontsize *s*)

Sets or gets the default text size for the help view.

Sets the internal [Fl\\_Help\\_View](#) instance text size.

Delegates call to encapsulated view\_ void [Fl\\_Help\\_View::textsize\(Fl\\_Fontsize s\)](#) instance method

References [Fl\\_Widget::activate\(\)](#), [Fl\\_Widget::deactivate\(\)](#), and [Fl\\_Help\\_View::textsize\(\)](#).

### 30.39.3.9 const char \* Fl\_Help\_Dialog::value () const

The first form sets the current buffer to the string provided and reformats the text.

It also clears the history of the "back" and "forward" buttons. The second form returns the current buffer contents.

References [Fl\\_Help\\_View::value\(\)](#).

### 30.39.3.10 void Fl\_Help\_Dialog::value (const char \* v)

The first form sets the current buffer to the string provided and reformats the text.

It also clears the history of the "back" and "forward" buttons. The second form returns the current buffer contents.

References [Fl\\_Window::label\(\)](#), [Fl\\_Widget::set\\_changed\(\)](#), [Fl\\_Help\\_View::title\(\)](#), and [Fl\\_Help\\_View::value\(\)](#).

### 30.39.3.11 int Fl\_Help\_Dialog::visible ()

Returns 1 if the [Fl\\_Help\\_Dialog](#) window is visible.

References [Fl\\_Widget::visible\(\)](#).

### 30.39.3.12 int Fl\_Help\_Dialog::w ()

Returns the position and size of the help dialog.

References [Fl\\_Widget::w\(\)](#).

### 30.39.3.13 int Fl\_Help\_Dialog::x ()

Returns the position and size of the help dialog.

References [Fl\\_Widget::x\(\)](#).

### 30.39.3.14 int Fl\_Help\_Dialog::y ()

Returns the position and size of the help dialog.

References [Fl\\_Widget::y\(\)](#).

The documentation for this class was generated from the following files:

- [Fl\\_Help\\_Dialog.H](#)
- [Fl\\_Help\\_Dialog.cxx](#)
- [Fl\\_Help\\_Dialog\\_Dox.cxx](#)

## 30.40 Fl\_Help\_Link Struct Reference

Definition of a link for the html viewer.

```
#include <Fl_Help_View.H>
```

### Public Attributes

- char **filename** [192]  
*Reference filename.*
- char **name** [32]  
*Link target (blank if none).*
- int **x**  
*X offset of link text.*
- int **y**  
*Y offset of link text.*
- int **w**  
*Width of link text.*
- int **h**  
*Height of link text.*

### 30.40.1 Detailed Description

Definition of a link for the html viewer.

The documentation for this struct was generated from the following file:

- [Fl\\_Help\\_View.H](#)

## 30.41 Fl\_Help\_Target Struct Reference

[Fl\\_Help\\_Target](#) structure.

```
#include <Fl_Help_View.H>
```

### Public Attributes

- char [name](#) [32]

*Target name.*

- int [y](#)

*Y offset of target.*

### 30.41.1 Detailed Description

[Fl\\_Help\\_Target](#) structure.

The documentation for this struct was generated from the following file:


- [Fl\\_Help\\_View.H](#)

## 30.42 Fl\_Help\_View Class Reference

The [Fl\\_Help\\_View](#) widget displays HTML text.

```
#include <Fl_Help_View.h>
```

Inheritance diagram for Fl\_Help\_View::



### Public Member Functions

- [Fl\\_Help\\_View](#) (int xx, int yy, int ww, int hh, const char \*l=0)  
*The constructor creates the [Fl\\_Help\\_View](#) widget at the specified position and size.*
- [~Fl\\_Help\\_View](#) ()  
*Destroy a [Fl\\_Help\\_View](#) widget.*
- const char \* [directory](#) () const  
*This method returns the current directory for the text in the buffer.*
- const char \* [filename](#) () const  
*This method returns the current filename for the text in the buffer.*
- int [find](#) (const char \*s, int p=0)  
*Find the specified string s at starting position p, return the matching pos or -1 if not found.*
- void [link](#) (Fl\_Help\_Func \*fn)  
*This method assigns a callback function to use when a link is followed or a file is loaded (via [Fl\\_Help\\_View::load\(\)](#)) that requires a different file or path.*
- int [load](#) (const char \*f)  
*Load the specified file.*
- void [resize](#) (int, int, int)  
*Resize the help widget.*
- int [size](#) () const  
*Gets the size of the Help view.*
- void [size](#) (int W, int H)  
*Change the size of the widget.*
- void [textcolor](#) (Fl\_Color c)

*Sets the default text color.*

- **Fl\_Color textcolor () const**

*Returns the current default text color.*

- **void textfont (Fl\_Font f)**

*Sets the default text font.*

- **Fl\_Font textfont () const**

*Returns the current default text font.*

- **void textsize (Fl\_Fontsize s)**

*Sets the default text size.*

- **Fl\_Fontsize textsize () const**

*Gets the default text size.*

- **const char \* title ()**

*Returns the current document title, or NULL if there is no title.*

- **void topline (const char \*n)**

*Scroll the text to the indicated position, given a named destination.*

- **void topline (int)**

*Scroll the text to the indicated position, given a pixel line.*

- **int topline () const**

*Returns the current top line in pixels.*

- **void leftline (int)**

*Sets the left position.*

- **int leftline () const**

*Gets the left position.*

- **void value (const char \*v)**

*Sets the current help text buffer to the string provided and reformats the text.*

- **const char \* value () const**

*Returns the current buffer contents.*

- **void clear\_selection ()**

*Removes the current text selection.*

- **void select\_all ()**

*Selects All the text in the view.*

### 30.42.1 Detailed Description

The [Fl\\_Help\\_View](#) widget displays HTML text.

Most HTML 2.0 elements are supported, as well as a primitive implementation of tables. GIF, JPEG, and PNG images are displayed inline.

### 30.42.2 Constructor & Destructor Documentation

#### 30.42.2.1 `Fl_Help_View::~Fl_Help_View ()`

Destroy a [Fl\\_Help\\_View](#) widget.

The destructor destroys the widget and frees all memory that has been allocated for the current file.

References `clear_selection()`.

### 30.42.3 Member Function Documentation

#### 30.42.3.1 `void Fl_Help_View::clear_selection ()`

Removes the current text selection.

Referenced by `load()`, `value()`, and `~Fl_Help_View()`.

#### 30.42.3.2 `const char* Fl_Help_View::directory () const [inline]`

This method returns the current directory for the text in the buffer.

#### 30.42.3.3 `const char* Fl_Help_View::filename () const [inline]`

This method returns the current filename for the text in the buffer.

#### 30.42.3.4 `int Fl_Help_View::leftline () const [inline]`

Gets the left position.

Referenced by `value()`.

#### 30.42.3.5 `void Fl_Help_View::leftline (int l)`

Sets the left position.

References `Fl_Widget::redraw()`, `Fl::scrollbar_size()`, `Fl_Scrollbar::value()`, and `Fl_Widget::w()`.

#### 30.42.3.6 `void Fl_Help_View::link (Fl_Help_Func *fn) [inline]`

This method assigns a callback function to use when a link is followed or a file is loaded (via [Fl\\_Help\\_View::load\(\)](#)) that requires a different file or path.

The callback function receives a pointer to the [Fl\\_Help\\_View](#) widget and the URI or full pathname for the file in question. It must return a pathname that can be opened as a local file or NULL:

```
const char *fn(Fl_Widget *w, const char *uri);
```

The link function can be used to retrieve remote or virtual documents, returning a temporary file that contains the actual data. If the link function returns NULL, the value of the [Fl\\_Help\\_View](#) widget will remain unchanged.

If the link callback cannot handle the URI scheme, it should return the uri value unchanged or set the [value\(\)](#) of the widget before returning NULL.

#### 30.42.3.7 int Fl\_Help\_View::load (const char \*f)

Load the specified file.

This method loads the specified file or URL.

References [clear\\_selection\(\)](#), and [topline\(\)](#).

Referenced by [Fl\\_Help\\_Dialog::load\(\)](#).

#### 30.42.3.8 void Fl\_Help\_View::resize (int xx, int yy, int ww, int hh) [virtual]

Resize the help widget.

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [FL\\_DOWN\\_BOX](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::resize\(\)](#), [Fl::scrollbar\\_size\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [Fl\\_Help\\_View\(\)](#).

#### 30.42.3.9 void Fl\_Help\_View::select\_all ()

Selects All the text in the view.

#### 30.42.3.10 void Fl\_Help\_View::size (int W, int H) [inline]

Change the size of the widget.

`size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

##### Parameters:

← *W,H* new size

##### See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::size\(\)](#).

#### 30.42.3.11 Fl\_Color Fl\_Help\_View::textcolor () const [inline]

Returns the current default text color.

**30.42.3.12 void Fl\_Help\_View::textcolor (Fl\_Color *c*) [inline]**

Sets the default text color.

**30.42.3.13 Fl\_Font Fl\_Help\_View::textfont () const [inline]**

Returns the current default text font.

**30.42.3.14 void Fl\_Help\_View::textfont (Fl\_Font *f*) [inline]**

Sets the default text font.

**30.42.3.15 Fl\_Fontsize Fl\_Help\_View::textsize () const [inline]**

Gets the default text size.

**30.42.3.16 void Fl\_Help\_View::textsize (Fl\_Fontsize *s*) [inline]**

Sets the default text size.

Referenced by Fl\_Help\_Dialog::textsize().

**30.42.3.17 const char\* Fl\_Help\_View::title () [inline]**

Returns the current document title, or NULL if there is no title.

Referenced by Fl\_Help\_Dialog::load(), and Fl\_Help\_Dialog::value().

**30.42.3.18 int Fl\_Help\_View::topline () const [inline]**

Returns the current top line in pixels.

Referenced by find(), load(), topline(), and value().

**30.42.3.19 void Fl\_Help\_View::topline (int *t*)**

Scroll the text to the indicated position, given a pixel line.

References Fl\_Widget::do\_callback(), Fl\_Widget::h(), Fl\_Widget::redraw(), Fl::scrollbar\_size(), and Fl\_Scrollbar::value().

**30.42.3.20 const char\* Fl\_Help\_View::value () const [inline]**

Returns the current buffer contents.

**30.42.3.21 void Fl\_Help\_View::value (const char \* *v*)**

Sets the current help text buffer to the string provided and reformats the text.

References clear\_selection(), leftline(), Fl\_Widget::set\_changed(), and topline().

Referenced by Fl\_Help\_Dialog::value().

The documentation for this class was generated from the following files:


- [Fl\\_Help\\_View.H](#)
- [Fl\\_Help\\_View.cxx](#)

## 30.43 Fl\_Hold\_Browser Class Reference

The [Fl\\_Hold\\_Browser](#) is a subclass of [Fl\\_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

```
#include <Fl_Hold_Browser.H>
```

Inheritance diagram for Fl\_Hold\_Browser::

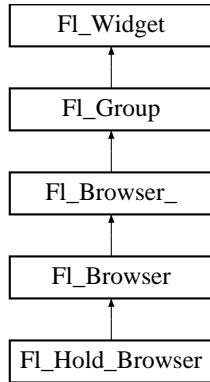

### Public Member Functions

- [Fl\\_Hold\\_Browser](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Hold\\_Browser](#) widget using the given position, size, and label string.*

#### 30.43.1 Detailed Description

The [Fl\\_Hold\\_Browser](#) is a subclass of [Fl\\_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

As long as the mouse button is held down the item pointed to by it is highlighted, and this highlighting remains on when the mouse button is released. Normally the callback is done when the user releases the mouse, but you can change this with [when\(\)](#).

See [Fl\\_Browser](#) for methods to add and remove lines from the browser.

#### 30.43.2 Constructor & Destructor Documentation

##### 30.43.2.1 [Fl\\_Hold\\_Browser::Fl\\_Hold\\_Browser](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Hold\\_Browser](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_DOWN\\_BOX](#). The constructor specializes [Fl\\_Browser\(\)](#) by setting the type to [FL\\_HOLD\\_BROWSER](#). The destructor destroys the widget and frees all memory that has been allocated.

References [FL\\_HOLD\\_BROWSER](#), and [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl\\_Hold\\_Browser.H](#)

## 30.44 Fl\_Image Class Reference

[Fl\\_Image](#) is the base class used for caching and drawing all kinds of images in FLTK.

```
#include <Fl_Image.H>
```

Inheritance diagram for Fl\_Image::



### Public Member Functions

- int [w\(\)](#) const

*See void [Fl\\_Image::w\(int\)](#).*

- int [h\(\)](#) const

*See void [Fl\\_Image::h\(int\)](#).*

- int [d\(\)](#) const

*The first form of the [d\(\)](#) method returns the current image depth.*

- int [ld\(\)](#) const

*The first form of the [ld\(\)](#) method returns the current line data size in bytes.*

- int [count\(\)](#) const

*The [count\(\)](#) method returns the number of data values associated with the image.*

- const char \*const \* [data\(\)](#) const

*The first form of the [data\(\)](#) method returns a pointer to the current image data array.*

- [Fl\\_Image](#) (int W, int H, int D)

*The constructor creates an empty image with the specified width, height, and depth.*

- virtual [~Fl\\_Image](#) ()

*The destructor is a virtual method that frees all memory used by the image.*

- virtual [Fl\\_Image](#) \* [copy](#) (int W, int H)

*The [copy\(\)](#) method creates a copy of the specified image.*

- [Fl\\_Image](#) \* [copy](#) ()

*The [copy\(\)](#) method creates a copy of the specified image.*

- virtual void [color\\_average](#) (Fl\_Color c, float i)

*The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value c.*

- void [inactive](#) ()

The [inactive\(\)](#) method calls `color_average(FL_BACKGROUND_COLOR, 0.33f)` to produce an image that appears grayed out.

- virtual void [desaturate \(\)](#)

*The [desaturate\(\)](#) method converts an image to grayscale.*

- virtual void [label \(Fl\\_Widget \\*w\)](#)

*The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.*

- virtual void [label \(Fl\\_Menu\\_Item \\*m\)](#)

*The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.*

- virtual void [draw \(int X, int Y, int W, int H, int cx=0, int cy=0\)](#)

*The [draw\(\)](#) methods draw the image.*

- void [draw \(int X, int Y\)](#)

*The [draw\(\)](#) methods draw the image.*

- virtual void [uncache \(\)](#)

*If the image has been cached for display, delete the cache data.*

## Protected Member Functions

- void [w \(int W\)](#)

*The first form of the [w\(\)](#) method returns the current image width in pixels.*

- void [h \(int H\)](#)

*The first form of the [h\(\)](#) method returns the current image height in pixels.*

- void [d \(int D\)](#)

*The first form of the [d\(\)](#) method returns the current image depth.*

- void [ld \(int LD\)](#)

*See int [ld\(\)](#).*

- void [data \(const char \\*const \\*p, int c\)](#)

*See const char \* const \*[data\(\)](#).*

- void [draw\\_empty \(int X, int Y\)](#)

*The protected method [draw\\_empty\(\)](#) draws a box with an X in it.*

## Static Protected Member Functions

- static void [labeltype \(const Fl\\_Label \\*lo, int lx, int ly, int lw, int lh, Fl\\_Align la\)](#)
- static void [measure \(const Fl\\_Label \\*lo, int &lw, int &lh\)](#)

### 30.44.1 Detailed Description

[Fl\\_Image](#) is the base class used for caching and drawing all kinds of images in FLTK.

This class keeps track of common image data such as the pixels, colormap, width, height, and depth. Virtual methods are used to provide type-specific image handling.

Since the [Fl\\_Image](#) class does not support image drawing by itself, calling the [draw\(\)](#) method results in a box with an X in it being drawn instead.

### 30.44.2 Constructor & Destructor Documentation

#### 30.44.2.1 [Fl\\_Image::Fl\\_Image \(int W, int H, int D\)](#) [inline]

The constructor creates an empty image with the specified width, height, and depth.

The width and height are in pixels. The depth is 0 for bitmaps, 1 for pixmap (colormap) images, and 1 to 4 for color images.

### 30.44.3 Member Function Documentation

#### 30.44.3.1 [void Fl\\_Image::color\\_average \(Fl\\_Color c, float i\)](#) [virtual]

The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value c.

The i argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented in [Fl\\_RGB\\_Image](#), [Fl\\_Pixmap](#), [Fl\\_Shared\\_Image](#), and [Fl\\_Tiled\\_Image](#).

Referenced by [Fl\\_Tiled\\_Image::color\\_average\(\)](#), and [Fl\\_Shared\\_Image::color\\_average\(\)](#).

#### 30.44.3.2 [Fl\\_Image\\* Fl\\_Image::copy \(\)](#) [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented in [Fl\\_Bitmap](#), [Fl\\_RGB\\_Image](#), [Fl\\_Pixmap](#), [Fl\\_Shared\\_Image](#), and [Fl\\_Tiled\\_Image](#).

References [copy\(\)](#).

Referenced by [copy\(\)](#).

#### 30.44.3.3 [Fl\\_Image \\* Fl\\_Image::copy \(int W, int H\)](#) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented in [Fl\\_Bitmap](#), [Fl\\_RGB\\_Image](#), [Fl\\_Pixmap](#), [Fl\\_Shared\\_Image](#), and [Fl\\_Tiled\\_Image](#).

References [d\(\)](#).

Referenced by [Fl\\_Tiled\\_Image::color\\_average\(\)](#), [Fl\\_Shared\\_Image::copy\(\)](#), [Fl\\_Tiled\\_Image::desaturate\(\)](#), and [Fl\\_Shared\\_Image::reload\(\)](#).

#### **30.44.3.4 int Fl\_Image::count () const [inline]**

The [count\(\)](#) method returns the number of data values associated with the image.

The value will be 0 for images with no associated data, 1 for bitmap and color images, and greater than 2 for pixmap images.

Referenced by [Fl\\_File\\_Icon::load\\_image\(\)](#).

#### **30.44.3.5 int Fl\_Image::d () const [inline]**

The first form of the [d\(\)](#) method returns the current image depth.

The return value will be 0 for bitmaps, 1 for pixmaps, and 1 to 4 for color images.

The second form is a protected method that sets the current image depth.

Referenced by [Fl\\_RGB\\_Image::color\\_average\(\)](#), [Fl\\_RGB\\_Image::copy\(\)](#), [copy\(\)](#), [Fl\\_RGB\\_Image::desaturate\(\)](#), [Fl\\_RGB\\_Image::draw\(\)](#), [Fl\\_BMP\\_Image::Fl\\_BMP\\_Image\(\)](#), [Fl\\_GIF\\_Image::Fl\\_GIF\\_Image\(\)](#), [Fl\\_JPEG\\_Image::Fl\\_JPEG\\_Image\(\)](#), [Fl\\_PNG\\_Image::Fl\\_PNG\\_Image\(\)](#), and [Fl\\_PNM\\_Image::Fl\\_PNM\\_Image\(\)](#).

#### **30.44.3.6 void Fl\_Image::d (int D) [inline, protected]**

The first form of the [d\(\)](#) method returns the current image depth.

The return value will be 0 for bitmaps, 1 for pixmaps, and 1 to 4 for color images.

The second form is a protected method that sets the current image depth.

Referenced by [Fl\\_File\\_Icon::load\\_image\(\)](#).

#### **30.44.3.7 const char\* const\* Fl\_Image::data () const [inline]**

The first form of the [data\(\)](#) method returns a pointer to the current image data array.

Use the [count\(\)](#) method to find the size of the data array.

The second form is a protected method that sets the current array pointer and count of pointers in the array.

Referenced by [Fl\\_Pixmap::color\\_average\(\)](#), [Fl\\_Pixmap::copy\(\)](#), [Fl\\_Pixmap::desaturate\(\)](#), [Fl\\_Pixmap::draw\(\)](#), [Fl\\_Bitmap::Fl\\_Bitmap\(\)](#), [Fl\\_GIF\\_Image::Fl\\_GIF\\_Image\(\)](#), [Fl\\_RGB\\_Image::Fl\\_RGB\\_Image\(\)](#), and [Fl\\_XPM\\_Image::Fl\\_XPM\\_Image\(\)](#).

#### **30.44.3.8 void Fl\_Image::desaturate () [virtual]**

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented in [Fl\\_RGB\\_Image](#), [Fl\\_Pixmap](#), [Fl\\_Shared\\_Image](#), and [Fl\\_Tiled\\_Image](#).

Referenced by [Fl\\_Tiled\\_Image::desaturate\(\)](#), and [Fl\\_Shared\\_Image::desaturate\(\)](#).

**30.44.3.9 void Fl\_Image::draw (int X, int Y) [inline]**

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented in [Fl\\_Bitmap](#), [Fl\\_RGB\\_Image](#), [Fl\\_Pixmap](#), [Fl\\_Shared\\_Image](#), and [Fl\\_Tiled\\_Image](#).

References [draw\(\)](#).

Referenced by [draw\(\)](#).

**30.44.3.10 void Fl\_Image::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]**

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented in [Fl\\_Bitmap](#), [Fl\\_RGB\\_Image](#), [Fl\\_Pixmap](#), [Fl\\_Shared\\_Image](#), and [Fl\\_Tiled\\_Image](#).

References [draw\\_empty\(\)](#).

Referenced by [Fl\\_Tiled\\_Image::draw\(\)](#), and [Fl\\_Shared\\_Image::draw\(\)](#).

**30.44.3.11 void Fl\_Image::draw\_empty (int X, int Y) [protected]**

The protected method [draw\\_empty\(\)](#) draws a box with an X in it.

It can be used to draw any image that lacks image data.

References [fl\\_color\(\)](#), [FL\\_FOREGROUND\\_COLOR](#), [fl\\_line\(\)](#), [fl\\_rect\(\)](#), [h\(\)](#), and [w\(\)](#).

Referenced by [Fl\\_Pixmap::draw\(\)](#), [Fl\\_RGB\\_Image::draw\(\)](#), [draw\(\)](#), and [Fl\\_Bitmap::draw\(\)](#).

**30.44.3.12 void Fl\_Image::h (int H) [inline, protected]**

The first form of the [h\(\)](#) method returns the current image height in pixels.

The second form is a protected method that sets the current image height.

Referenced by [Fl\\_Tiled\\_Image::draw\(\)](#), [Fl\\_Shared\\_Image::find\(\)](#), [Fl\\_Shared\\_Image::get\(\)](#), [Fl\\_File\\_Icon::load\\_image\(\)](#), [Fl\\_Shared\\_Image::reload\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

**30.44.3.13 void Fl\_Image::inactive () [inline]**

The [inactive\(\)](#) method calls [color\\_average\(FL\\_BACKGROUND\\_COLOR, 0.33f\)](#) to produce an image that appears grayed out.

*This method does not alter the original image data.*

**30.44.3.14 void Fl\_Image::label (Fl\_Menu\_Item \* m) [virtual]**

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented in [Fl\\_Bitmap](#), [Fl\\_RGB\\_Image](#), and [Fl\\_Pixmap](#).

References `_FL_IMAGE_LABEL`, `Fl_Menu_Item::label()`, and `Fl::set_labeltype()`.

#### **30.44.3.15 void Fl\_Image::label (Fl\_Widget \* *widget*) [virtual]**

The `label()` methods are an obsolete way to set the image attribute of a widget or menu item.

Use the `image()` or `deimage()` methods of the `Fl_Widget` and `Fl_Menu_Item` classes instead.

Reimplemented in `Fl_Bitmap`, `Fl_RGB_Image`, and `Fl_Pixmap`.

References `Fl_Widget::image()`.

Referenced by `Fl_Menu_Item::image()`.

#### **30.44.3.16 int Fl\_Image::ld () const [inline]**

The first form of the `ld()` method returns the current line data size in bytes.

Line data is extra data that is included after each line of color image data and is normally not present.

The second form is a protected method that sets the current line data size in bytes.

Referenced by `Fl_RGB_Image::color_average()`, `Fl_RGB_Image::copy()`, `Fl_RGB_Image::desaturate()`, `Fl_RGB_Image::draw()`, and `Fl_RGB_Image::Fl_RGB_Image()`.

#### **30.44.3.17 void Fl\_Image::uncache () [virtual]**

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented in `Fl_Bitmap`, `Fl_RGB_Image`, `Fl_Pixmap`, and `Fl_Shared_Image`.

Referenced by `Fl_Shared_Image::uncache()`.

#### **30.44.3.18 void Fl\_Image::w (int *W*) [inline, protected]**

The first form of the `w()` method returns the current image width in pixels.

The second form is a protected method that sets the current image width.

Referenced by `Fl_Tiled_Image::draw()`, `Fl_Shared_Image::find()`, `Fl_Shared_Image::get()`, `Fl_File_Icon::load_image()`, `Fl_Shared_Image::reload()`, and `Fl_File_Chooser::rescan_keep_filename()`.

The documentation for this class was generated from the following files:


- [Fl\\_Image.H](#)
- [Fl\\_Image.cxx](#)

## 30.45 Fl\_Input Class Reference

This is the FLTK text input widget.

```
#include <Fl_Input.H>
```

Inheritance diagram for Fl\_Input::

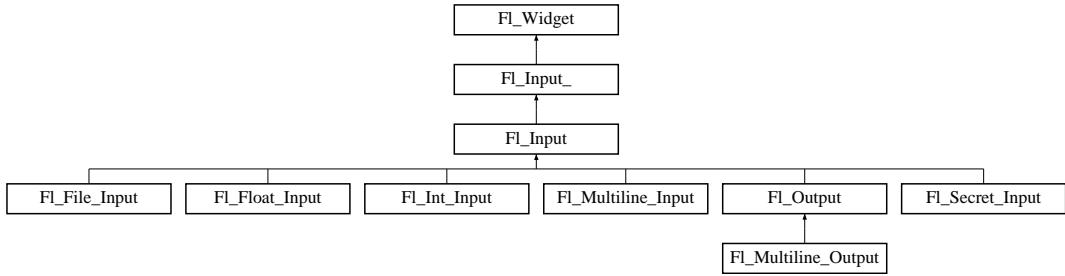

### Public Member Functions

- void [draw \(\)](#)

*Draw the widget.*

- int [handle \(int\)](#)

*Handles the specified event.*

- [Fl\\_Input \(int, int, int, int, const char \\*=0\)](#)

*Creates a new [Fl\\_Input](#) widget using the given position, size, and label string.*

### 30.45.1 Detailed Description

This is the FLTK text input widget.

It displays a single line of text and lets the user edit it. Normally it is drawn with an inset box and a white background. The text may contain any characters (even 0), and will correctly display anything, using ^X notation for unprintable control characters and \nnn notation for unprintable characters with the high bit set. It assumes the font can draw any characters in the ISO-8859-1 character set.

<b>Mouse button 1</b>	Moves the cursor to this point. Drag selects characters. Double click selects words. Triple click selects all text. Shift+click extends the selection. When you select text it is automatically copied to the clipboard.
<b>Mouse button 2</b>	Insert the clipboard at the point clicked. You can also select a region and replace it with the clipboard by selecting the region with mouse button 2.
<b>Mouse button 3</b>	Currently acts like button 1.
<b>Backspace</b>	Deletes one character to the left, or deletes the selected region.
<b>Enter</b>	May cause the callback, see <a href="#">when()</a> .
<b>^A or Home</b>	Go to start of line.
<b>^B or Left</b>	Move left
<b>^C</b>	Copy the selection to the clipboard
<b>^D or Delete</b>	Deletes one character to the right or deletes the selected region.
<b>^E or End</b>	Go to the end of line.
<b>^F or Right</b>	Move right
<b>^K</b>	Delete to the end of line (next \n character) or deletes a single \n character. These deletions are all concatenated into the clipboard.
<b>^N or Down</b>	Move down (for <a href="#">Fl_Multiline_Input</a> only, otherwise it moves to the next input field).
<b>^P or Up</b>	Move up (for <a href="#">Fl_Multiline_Input</a> only, otherwise it moves to the previous input field).
<b>^U</b>	Delete everything.
<b>^V or ^Y</b>	Paste the clipboard
<b>^X or ^W</b>	Copy the region to the clipboard and delete it.
<b>^Z or ^_</b>	Undo. This is a single-level undo mechanism, but all adjacent deletions and insertions are concatenated into a single "undo". Often this will undo a lot more than you expected.
<b>Shift+move</b>	Move the cursor but also extend the selection.
<b>RightCtrl or Compose</b>	<p>Start a compose-character sequence. The next one or two keys typed define the character to insert (see table that follows.)</p> <p>For instance, to type "ä" type [compose][a]['] or [compose][''][a].</p> <p>The character "nbsp" (non-breaking space) is typed by using [compose][space].</p> <p>The single-character sequences may be followed by a space if necessary to remove ambiguity. For instance, if you really want to type "ö" rather than "ä" you must type [compose][a][space][~].</p> <p>The same key may be used to "quote" control characters into the text. If you need a ^Q character you can get one by typing [compose][Control+Q].</p> <p>X may have a key on the keyboard defined as XK_Multi_key. If so this key may be used as well as the right-hand control key. You can set this up with the program xmodmap.</p> <p>If your keyboard is set to support a foreign language you should also be able to type "dead key" prefix characters. On X you will actually be able to see what dead key you typed, and if you</p>

Keys	Char	Keys	Char	Keys	Char	Keys	Char	Keys	Char	Keys	Char
sp ^ a ,	nbsp ' A o	*	~ N # : A	' A 3 : a	' a ~ n ^ o	D - % ~ A	' a ' O	- 2 ~ a	! o	A ^ \$	+ - ' O
y =	u			* A	~ O	* a	~ o				
	p			A E	: O	a e	o				
&	.			, C	x	, c	:				
:	,			E '	O /	' e	/				
c	1			' E	' U	' e	u				
a	o			^ E	' U	^ e	u				
< <	> >			: E	^ U	: e	^ u				
~	1 4			' I	: U	' i	u				
-	1 2			' I	' Y	' i	y				
r	3 4			^ I	T H	^ i	h				
_	?			: I	s s	: i	y				

Table 30.1: Character Composition Table

## 30.45.2 Constructor & Destructor Documentation

### 30.45.2.1 Fl\_Input::Fl\_Input (int X, int Y, int W, int H, const char \* l = 0)

Creates a new [Fl\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`.

## 30.45.3 Member Function Documentation

### 30.45.3.1 void Fl\_Input::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

Reimplemented in [Fl\\_File\\_Input](#).

References `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::color()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `Fl_Input_::drawtext()`, `Fl_Widget::h()`, `Fl_Input_::input_type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `Fl_Value_Input::draw()`.

### 30.45.3.2 int Fl\_Input::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_File\\_Input](#).

References `Fl_Widget::active_r()`, `Fl::belowmouse()`, `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Input_::copy()`, `Fl_Window::cursor()`, `Fl::dnd()`, `Fl::dnd_text_ops()`, `Fl_Widget::do_callback()`, `Fl::event_button()`, `Fl::event_clicks()`, `Fl::event_is_click()`, `Fl::event_key()`, `Fl::event_state()`, `FL_DND_DRAG`, `FL_DND_ENTER`, `FL_DND_LEAVE`, `FL_DND_RELEASE`, `FL_Down`, `FL_DRAG`, `FL_FOCUS`, `FL_KEYBOARD`, `FL_Left`, `FL_PUSH`, `FL_RELEASE`, `FL_Right`, `FL_SHIFT`, `FL_Tab`, `FL_UNFOCUS`, `FL_Up`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Input_::input_type()`, `Fl_Input_::mark()`, `Fl::paste()`, `Fl_Input_::position()`, `Fl_Input_::readonly()`, `Fl_Input_::size()`, `Fl_Widget::take_focus()`, `Fl_Input_::up_down_position()`, `Fl_Widget::w()`, `Fl_Widget::window()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `Fl_Value_Input::handle()`, and `Fl_File_Input::handle()`.

The documentation for this class was generated from the following files:


- [Fl\\_Input.H](#)
- [Fl\\_Input.cxx](#)

## 30.46 Fl\_Input\_ Class Reference

This is a virtual base class below [Fl\\_Input](#).

```
#include <Fl_Input_.h>
```

Inheritance diagram for [Fl\\_Input\\_](#):

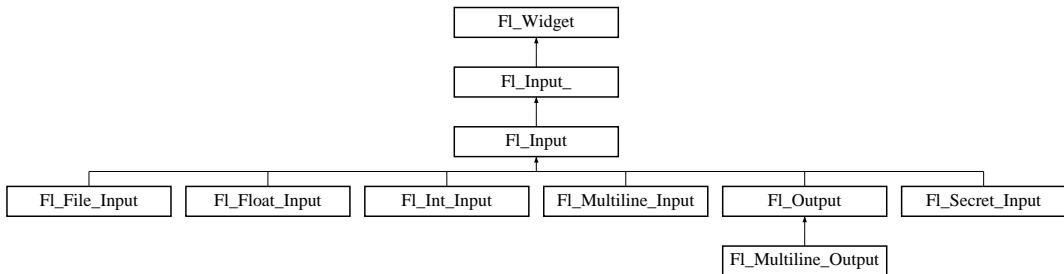

### Public Member Functions

- void [resize](#) (int, int, int, int)  
*Change the size or position of the widget.*
- [Fl\\_Input\\_](#) (int, int, int, const char \*=0)  
*Creates a new [Fl\\_Input\\_](#) widget using the given position, size, and label string.*
- int [value](#) (const char \*)  
*See const char \*[Fl\\_Input\\_value\(\)](#) const.*
- int [value](#) (const char \*, int)  
*See const char \*[Fl\\_Input\\_value\(\)](#) const.*
- int [static\\_value](#) (const char \*)  
*Change the text and set the mark and the point to the end of it.*
- int [static\\_value](#) (const char \*, int)  
*See int [Fl\\_Input::static\\_value\(const char\\*\)](#).*
- const char \* [value](#) () const  
*The first form returns the current value, which is a pointer to the internal buffer and is valid only until the next event is handled.*
- char [index](#) (int i) const  
*Same as [value\(\) \[n\]](#), but may be faster in plausible implementations.*
- int [size](#) () const  
*Returns the number of characters in [value\(\)](#).*
- void [size](#) (int W, int H)  
*Change the size of the widget.*

- int **maximum\_size** () const  
*Gets the maximum length of the input field.*
- void **maximum\_size** (int m)  
*Sets the maximum length of the input field.*
- int **position** () const  
*The input widget maintains two pointers into the string.*
- int **mark** () const  
*Gets the current selection mark.*
- int **position** (int p, int m)  
*See int [Fl\\_Input\\_::position\(\)](#) const.*
- int **position** (int p)  
*See int [Fl\\_Input\\_::position\(\)](#) const.*
- int **mark** (int m)  
*Sets the current selection mark.*
- int **replace** (int, int, const char \*, int=0)  
*This call does all editing of the text.*
- int **cut** ()  
*Deletes the current selection.*
- int **cut** (int n)  
*See int [Fl\\_Input\\_::cut\(\)](#).*
- int **cut** (int a, int b)  
*See int [Fl\\_Input\\_::cut\(\)](#).*
- int **insert** (const char \*t, int l=0)  
*Insert the string t at the current position, and leave the mark and position after it.*
- int **copy** (int clipboard)  
*Put the current selection between [mark\(\)](#) and [position\(\)](#) into the specified clipboard.*
- int **undo** ()  
*Does undo of several previous calls to [replace\(\)](#).*
- int **copy\_cuts** ()  
*Copy all the previous contiguous cuts from the undo information to the clipboard.*
- int **shortcut** () const  
*The first form returns the current shortcut key for the Input.*
- void **shortcut** (int s)  
*See int [shortcut\(\)](#) const.*

- `Fl_Font textfont () const`  
*Gets the font of the text in the input field.*
- `void textfont (Fl_Font s)`  
*Sets the font of the text in the input field.*
- `Fl_Fontsize textsize () const`  
*Gets the size of the text in the input field.*
- `void textsize (Fl_Fontsize s)`  
*Sets the size of the text in the input field.*
- `Fl_Color textcolor () const`  
*Gets the color of the text in the input field.*
- `void textcolor (unsigned n)`  
*Sets the color of the text in the input field.*
- `Fl_Color cursor_color () const`  
*Gets the color of the cursor.*
- `void cursor_color (unsigned n)`  
*Sets the color of the cursor.*
- `int input_type () const`  
*Gets the input field type.*
- `void input_type (int t)`  
*Sets the input field type.*
- `int readonly () const`  
*Gets the read-only state of the input field.*
- `void readonly (int b)`  
*Sets the read-only state of the input field.*
- `int wrap () const`  
*Gets the word wrapping state of the input field.*
- `void wrap (int b)`  
*Sets the word wrapping state of the input field.*

## Protected Member Functions

- `int word_start (int i) const`
- `int word_end (int i) const`
- `int line_start (int i) const`

- int **line\_end** (int i) const
- void **drawtext** (int, int, int, int)
 

*Draw the text in the passed bounding box.*
- int **up\_down\_position** (int, int keepmark=0)
 

*Do the correct thing for arrow keys.*
- void **handle\_mouse** (int, int, int, int, int keepmark=0)
- int **handletext** (int e, int, int, int, int)
- void **maybe\_do\_callback** ()
- int **xscroll** () const
- int **yscroll** () const

### 30.46.1 Detailed Description

This is a virtual base class below [Fl\\_Input](#).

It has all the same interfaces, but lacks the [handle\(\)](#) and [draw\(\)](#) method. You may want to subclass it if you are one of those people who likes to change how the editing keys work.

This can act like any of the subclasses of [Fl\\_Input](#), by setting [type\(\)](#) to one of the following values:

```
#define FL_NORMAL_INPUT          0
#define FL_FLOAT_INPUT           1
#define FL_INT_INPUT             2
#define FL_MULTILINE_INPUT       4
#define FL_SECRET_INPUT          5
#define FL_INPUT_TYPE            7
#define FL_INPUT_READONLY         8
#define FL_NORMAL_OUTPUT          (FL_NORMAL_INPUT | FL_INPUT_READONLY)
#define FL_MULTILINE_OUTPUT       (FL_MULTILINE_INPUT | FL_INPUT_READONLY)
#define FL_INPUT_WRAP              16
#define FL_MULTILINE_INPUT_WRAP   (FL_MULTILINE_INPUT | FL_INPUT_WRAP)
#define FL_MULTILINE_OUTPUT_WRAP  (FL_MULTILINE_INPUT | FL_INPUT_READONLY | FL_INPUT_WRAP)
```

### 30.46.2 Constructor & Destructor Documentation

#### 30.46.2.1 [Fl\\_Input::Fl\\_Input\\_\(int X, int Y, int W, int H, const char \\*l = 0\)](#)

Creates a new [Fl\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_DOWN\\_BOX](#).

References [Fl\\_Widget::align\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::color\(\)](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_BACKGROUND2\\_COLOR](#), [FL\\_DOWN\\_BOX](#), [FL\\_FOREGROUND\\_COLOR](#), [FL\\_HELVETICA](#), [FL\\_NORMAL\\_SIZE](#), [FL\\_SELECTION\\_COLOR](#), [Fl\\_Widget::set\\_flag\(\)](#), and [Fl\\_Widget::SHORTCUT\\_LABEL](#).

### 30.46.3 Member Function Documentation

#### 30.46.3.1 [int Fl\\_Input::copy \(int clipboard\)](#)

Put the current selection between [mark\(\)](#) and [position\(\)](#) into the specified clipboard.

Does not replace the old clipboard contents if [position\(\)](#) and [mark\(\)](#) are equal. Clipboard 0 maps to the current text selection and clipboard 1 maps to the cut/paste clipboard.

References [input\\_type\(\)](#), [mark\(\)](#), [position\(\)](#), and [value\(\)](#).

Referenced by [copy\\_cuts\(\)](#), and [Fl\\_Input::handle\(\)](#).

#### 30.46.3.2 int Fl\_Input\_::copy\_cuts ()

Copy all the previous contiguous cuts from the undo information to the clipboard.

This is used to make ^K work.

References [copy\(\)](#), and [input\\_type\(\)](#).

#### 30.46.3.3 void Fl\_Input\_::cursor\_color (unsigned n) [inline]

Sets the color of the cursor.

This is black by default.

#### 30.46.3.4 Fl\_Color Fl\_Input\_::cursor\_color () const [inline]

Gets the color of the cursor.

This is black by default.

Referenced by [drawtext\(\)](#).

#### 30.46.3.5 int Fl\_Input\_::cut () [inline]

Deletes the current selection.

[cut\(n\)](#) deletes n characters after the [position\(\)](#). [cut\(-n\)](#) deletes n characters before the [position\(\)](#). [cut\(a,b\)](#) deletes the characters between offsets a and b. A, b, and n are all clamped to the size of the string. The mark and point are left where the deleted text was.

If you want the data to go into the clipboard, do [Fl\\_Input::copy\(\)](#) before calling [Fl\\_Input::cut\(\)](#), or do [Fl\\_Input::copy\\_cuts\(\)](#) afterwards.

References [Fl\\_Widget::position\(\)](#).

#### 30.46.3.6 void Fl\_Input\_::drawtext (int X, int Y, int W, int H) [protected]

Draw the text in the passed bounding box.

If [damage\(\)](#) & [FL\\_DAMAGE\\_ALL](#) is true, this assumes the area has already been erased to [color\(\)](#). Otherwise it does minimal update and erases the area itself.

References [Fl\\_Widget::active\\_r\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [Fl\\_Widget::color\(\)](#), [cursor\\_color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [fl\\_clip](#), [fl\\_color\(\)](#), [fl\\_line\(\)](#), [fl\\_pop\\_clip\(\)](#), [fl\\_push\\_clip\(\)](#), [fl\\_rectf\(\)](#), [Fl::focus\(\)](#), [input\\_type\(\)](#), [mark\(\)](#), [position\(\)](#), [Fl::pushed\(\)](#), [readonly\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [size\(\)](#), [textcolor\(\)](#), [textfont\(\)](#), [textsize\(\)](#), and [value\(\)](#).

Referenced by [Fl\\_Input::draw\(\)](#), and [Fl\\_File\\_Input::draw\(\)](#).

**30.46.3.7 char Fl\_Input\_::index (int i) const [inline]**

Same as [value\(\)](#)[n], but may be faster in plausible implementations.

No bounds checking is done.

Referenced by [replace\(\)](#), and [undo\(\)](#).

**30.46.3.8 void Fl\_Input\_::input\_type (int t) [inline]**

Sets the input field type.

References [Fl\\_Widget::type\(\)](#).

**30.46.3.9 int Fl\_Input\_::input\_type () const [inline]**

Gets the input field type.

References [Fl\\_Widget::type\(\)](#).

Referenced by [copy\(\)](#), [copy\\_cuts\(\)](#), [Fl\\_Input::draw\(\)](#), [drawtext\(\)](#), [Fl\\_Input::handle\(\)](#), and [replace\(\)](#).

**30.46.3.10 int Fl\_Input\_::insert (const char \* t, int l = 0) [inline]**

Insert the string t at the current position, and leave the mark and position after it.

If l is not zero then it is assumed to be [strlen\(t\)](#).

**30.46.3.11 int Fl\_Input\_::mark (int m) [inline]**

Sets the current selection mark.

[mark\(n\)](#) is the same as [position\(position\(\),n\)](#).

References [Fl\\_Widget::position\(\)](#).

**30.46.3.12 int Fl\_Input\_::mark () const [inline]**

Gets the current selection mark.

[mark\(n\)](#) is the same as [position\(position\(\),n\)](#).

Referenced by [copy\(\)](#), [drawtext\(\)](#), and [Fl\\_Input::handle\(\)](#).

**30.46.3.13 void Fl\_Input\_::maximum\_size (int m) [inline]**

Sets the maximum length of the input field.

**30.46.3.14 int Fl\_Input\_::maximum\_size () const [inline]**

Gets the maximum length of the input field.

**30.46.3.15 int Fl\_Input\_::position () const [inline]**

The input widget maintains two pointers into the string.

The "position" is where the cursor is. The "mark" is the other end of the selected text. If they are equal then there is no selection. Changing this does not affect the clipboard (use [copy\(\)](#) to do that).

Changing these values causes a [redraw\(\)](#). The new values are bounds checked. The return value is non-zero if the new position is different than the old one. `position(n)` is the same as `position(n,n)`. `mark(n)` is the same as `position(position(),n)`.

Referenced by `copy()`, `drawtext()`, `Fl_Input::handle()`, `static_value()`, `up_down_position()`, and `Fl_File_Chooser::value()`.

**30.46.3.16 void Fl\_Input\_::readonly (int b) [inline]**

Sets the read-only state of the input field.

References `Fl_Widget::type()`.

**30.46.3.17 int Fl\_Input\_::readonly () const [inline]**

Gets the read-only state of the input field.

References `Fl_Widget::type()`.

Referenced by `drawtext()`, `Fl_Input::handle()`, and `static_value()`.

**30.46.3.18 int Fl\_Input\_::replace (int b, int e, const char \* text, int ilen = 0)**

This call does all editing of the text.

It deletes the region between a and b (either one may be less or equal to the other), and then inserts the string insert at that point and leaves the [mark\(\)](#) and [position\(\)](#) after the insertion. Does the callback if [when\(\)](#) & `FL_WHEN_CHANGED` and there is a change.

Set start and end equal to not delete anything. Set insert to NULL to not insert anything.

length must be zero or `strlen(insert)`, this saves a tiny bit of time if you happen to already know the length of the insertion, or can be used to insert a portion of a string or a string containing nul's.

a and b are clamped to the `0..size()` range, so it is safe to pass any values.

[cut\(\)](#) and [insert\(\)](#) are just inline functions that call [replace\(\)](#).

References `Fl_Widget::do_callback()`, `FL_WHEN_CHANGED`, `index()`, `input_type()`, `Fl_Widget::set_changed()`, `Fl_Widget::when()`, and `wrap()`.

**30.46.3.19 void Fl\_Input\_::resize (int x, int y, int w, int h) [virtual]**

Change the size or position of the widget.

This is a virtual function so that the widget may implement its own handling of resizing. The default version does *not* call the [redraw\(\)](#) method, but instead relies on the parent widget to do so because the parent may know a faster way to update the display, such as scrolling from the old position.

Some window managers under X11 call [resize\(\)](#) a lot more often than needed. Please verify that the position or size of a widget did actually change before doing any extensive calculations.

`position(x,y)` is a shortcut for `resize(x,y,w(),h())`, and `size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

**Parameters:**

←  $x,y$  new position relative to the parent window  
 ←  $w,h$  new size

**See also:**

[position\(int, int\)](#), [size\(int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References `Fl_Widget::h()`, and `Fl_Widget::w()`.

Referenced by `Fl_Value_Input::resize()`, `Fl_Spinner::resize()`, and `Fl_Input_Choice::resize()`.

### 30.46.3.20 int Fl\_Input\_::shortcut () const [inline]

The first form returns the current shortcut key for the Input.

The second form sets the shortcut key to key. Setting this overrides the use of '&' in the [label\(\)](#). The value is a bitwise OR of a key and a set of shift flags, for example `FL_ALT | 'a'`, `FL_ALT | (FL_F + 10)`, or just 'a'. A value of 0 disables the shortcut.

The key can be any value returned by [Fl::event\\_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event\\_state\(\)](#). If the bit is on that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

### 30.46.3.21 void Fl\_Input\_::size (int W, int H) [inline]

Change the size of the widget.

`size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

**Parameters:**

←  $W,H$  new size

**See also:**

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References `Fl_Widget::size()`.

### 30.46.3.22 int Fl\_Input\_::size () const [inline]

Returns the number of characters in [value\(\)](#).

This may be greater than `strlen(value())` if there are nul characters in it.

Referenced by `Fl_File_Input::draw()`, `drawtext()`, `Fl_Input::handle()`, `position()`, and `static_value()`.

**30.46.3.23 int Fl\_Input\_::static\_value (const char \* str)**

Change the text and set the mark and the point to the end of it.

The string is *not* copied. If the user edits the string it is copied to the internal buffer then. This can save a great deal of time and memory if your program is rapidly changing the values of text fields, but this will only work if the passed string remains unchanged until either the [Fl\\_Input](#) is destroyed or [value\(\)](#) is called again.

Referenced by [value\(\)](#).

**30.46.3.24 void Fl\_Input\_::textcolor (unsigned n) [inline]**

Sets the color of the text in the input field.

**30.46.3.25 Fl\_Color Fl\_Input\_::textcolor () const [inline]**

Gets the color of the text in the input field.

Referenced by [drawtext\(\)](#), [Fl\\_Spinner::textcolor\(\)](#), and [Fl\\_Input\\_Choice::textcolor\(\)](#).

**30.46.3.26 void Fl\_Input\_::textfont (Fl\_Font s) [inline]**

Sets the font of the text in the input field.

**30.46.3.27 Fl\_Font Fl\_Input\_::textfont () const [inline]**

Gets the font of the text in the input field.

Referenced by [drawtext\(\)](#), [Fl\\_Help\\_Dialog::Fl\\_Help\\_Dialog\(\)](#), [Fl\\_Spinner::textfont\(\)](#), and [Fl\\_Input\\_Choice::textfont\(\)](#).

**30.46.3.28 void Fl\_Input\_::textsize (Fl\_Fontsize s) [inline]**

Sets the size of the text in the input field.

**30.46.3.29 Fl\_Fontsize Fl\_Input\_::textsize () const [inline]**

Gets the size of the text in the input field.

Referenced by [drawtext\(\)](#), [Fl\\_Spinner::textsize\(\)](#), and [Fl\\_Input\\_Choice::textsize\(\)](#).

**30.46.3.30 int Fl\_Input\_::undo ()**

Does undo of several previous calls to [replace\(\)](#).

Returns non-zero if any change was made.

References [Fl\\_Widget::do\\_callback\(\)](#), [FL\\_WHEN\\_CHANGED](#), [index\(\)](#), [Fl\\_Widget::set\\_changed\(\)](#), [Fl\\_Widget::when\(\)](#), and [wrap\(\)](#).

**30.46.3.31 int Fl\_Input\_::up\_down\_position (int *i*, int *keepmark* = 0) [protected]**

Do the correct thing for arrow keys.

Sets the position (and mark if *keepmark* is zero) to somewhere in the same line as *i*, such that pressing the arrows repeatedly will cause the point to move up and down.

References position(), and value().

Referenced by Fl\_Input::handle().

**30.46.3.32 const char\* Fl\_Input\_::value () const [inline]**

The first form returns the current value, which is a pointer to the internal buffer and is valid only until the next event is handled.

The second two forms change the text and set the mark and the point to the end of it. The string is copied to the internal buffer. Passing NULL is the same as "". This returns non-zero if the new value is different than the current one. You can use the second version to directly set the length if you know it already or want to put nul's in the text.

Referenced by copy(), drawtext(), position(), up\_down\_position(), value(), and Fl\_File\_Input::value().

**30.46.3.33 void Fl\_Input\_::wrap (int *b*) [inline]**

Sets the word wrapping state of the input field.

Word wrap is only functional with multi-line input fields.

References Fl\_Widget::type().

**30.46.3.34 int Fl\_Input\_::wrap () const [inline]**

Gets the word wrapping state of the input field.

Word wrap is only functional with multi-line input fields.

References Fl\_Widget::type().

Referenced by replace(), and undo().

The documentation for this class was generated from the following files:


- [Fl\\_Input\\_.H](#)
- [Fl\\_Input\\_.cxx](#)

## 30.47 Fl\_Input\_Choice Class Reference

A combination of the input widget and a menu button.

```
#include <Fl_Input_Choice.H>
```

Inheritance diagram for Fl\_Input\_Choice::



## Classes

- class **InputMenuButton**

## Public Member Functions

- **Fl\_Input\_Choice** (int x, int y, int w, int h, const char \*l=0)  
*Creates a new [Fl\\_Input\\_Choice](#) widget using the given position, size, and label string.*
- void **add** (const char \*s)  
*Adds an item to the menu.*
- int **changed** () const  
*Check if the widget value changed since the last callback.*
- void **clear\_changed** ()  
*Mark the value of the widget as unchanged.*
- void **set\_changed** ()  
*Mark the value of the widget as changed.*
- void **clear** ()  
*Removes all items from the menu.*
- **Fl\_Boxtype down\_box** () const  
*Gets the box type of the menu button.*
- void **down\_box** (Fl\_Boxtype b)  
*Sets the box type of the menu button.*
- const **Fl\_Menu\_Item** \* **menu** ()  
*Gets the [Fl\\_Menu\\_Item](#) array used for the menu.*
- void **menu** (const **Fl\_Menu\_Item** \*m)

*Sets the `Fl_Menu_Item` array used for the menu.*

- void `resize` (int X, int Y, int W, int H)  
*This resizes the `Fl_Group` widget and all of its children.*
- `Fl_Color textcolor` () const  
*Gets the encapsulated input text color attributes.*
- void `textcolor` (`Fl_Color` c)  
*Sets the encapsulated input text color attributes.*
- `Fl_Font textfont` () const  
*Gets the encapsulated input text font attributes.*
- void `textfont` (`Fl_Font` f)  
*Sets the encapsulated input text font attributes.*
- `Fl_Fontsize textsize` () const  
*Gets the encapsulated input size attributes.*
- void `textsize` (`Fl_Fontsize` s)  
*Sets the encapsulated input size attributes.*
- const char \* `value` () const  
*See void `Fl_Input_Choice::value(const char *s)`.*
- void `value` (const char \*val)  
*Sets or returns the input widget's current contents.*
- void `value` (int val)  
*See void `Fl_Input_Choice::value(const char *s)`.*
- `Fl_Menu_Button * menubutton` ()  
*Returns a reference to the internal `Fl_Menu_Button` widget.*
- `Fl_Input * input` ()  
*Returns a reference to the internal `Fl_Input` widget.*

### 30.47.1 Detailed Description

A combination of the input widget and a menu button.

The user can either type into the input area, or use the menu button chooser on the right, which loads the input area with predefined text. Normally it is drawn with an inset box and a white background.

The application can directly access both the input and menu widgets directly, using the `menubutton()` and `input()` accessor methods.

### 30.47.2 Constructor & Destructor Documentation

**30.47.2.1 Fl\_Input\_Choice::Fl\_Input\_Choice (int *x*, int *y*, int *w*, int *h*, const char \* *l* = 0) [inline]**

Creates a new [Fl\\_Input\\_Choice](#) widget using the given position, size, and label string.

Inherited destructor Destroys the widget and any value associated with it.

References [Fl\\_Widget::align\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::callback\(\)](#), [Fl\\_Group::end\(\)](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_DOWN\\_BOX](#), [FL\\_FLAT\\_BOX](#), [FL\\_WHEN\\_CHANGED](#), [FL\\_WHEN\\_NOT\\_CHANGED](#), and [Fl\\_Widget::when\(\)](#).

### 30.47.3 Member Function Documentation

**30.47.3.1 void Fl\_Input\_Choice::add (const char \* *s*) [inline]**

Adds an item to the menu.

**30.47.3.2 int Fl\_Input\_Choice::changed () const [inline]**

Check if the widget value changed since the last callback.

"Changed" is a flag that is turned on when the user changes the value stored in the widget. This is only used by subclasses of [Fl\\_Widget](#) that store values, but is in the base class so it is easier to scan all the widgets in a panel and [do\\_callback\(\)](#) on the changed ones in response to an "OK" button.

Most widgets turn this flag off when they do the callback, and when the program sets the stored value.

**Return values:**

*0* if the value did not change

**See also:**

[set\\_changed\(\)](#), [clear\\_changed\(\)](#)\*

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::changed\(\)](#).

**30.47.3.3 void Fl\_Input\_Choice::clear () [inline]**

Removes all items from the menu.

Reimplemented from [Fl\\_Group](#).

**30.47.3.4 void Fl\_Input\_Choice::clear\_changed () [inline]**

Mark the value of the widget as unchanged.

**See also:**

[changed\(\)](#), [set\\_changed\(\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::clear\\_changed\(\)](#).

#### **30.47.3.5 `FL_Input* Fl_Input_Choice::input () [inline]`**

Returns a reference to the internal [Fl\\_Input](#) widget.

#### **30.47.3.6 `void Fl_Input_Choice::menu (const Fl_Menu_Item * m) [inline]`**

Sets the [Fl\\_Menu\\_Item](#) array used for the menu.

#### **30.47.3.7 `const Fl_Menu_Item* Fl_Input_Choice::menu () [inline]`**

Gets the [Fl\\_Menu\\_Item](#) array used for the menu.

#### **30.47.3.8 `Fl_Menu_Button* Fl_Input_Choice::menubutton () [inline]`**

Returns a reference to the internal [Fl\\_Menu\\_Button](#) widget.

#### **30.47.3.9 `void Fl_Input_Choice::resize (int X, int Y, int W, int H) [inline, virtual]`**

This resizes the [Fl\\_Group](#) widget and all of its children.

The [Fl\\_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for [Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)

**See also:**

[Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)  
[Fl\\_Group::resizable\(\)](#)  
[Fl\\_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Input\\_::resize\(\)](#).

#### **30.47.3.10 `void Fl_Input_Choice::set_changed () [inline]`**

Mark the value of the widget as changed.

**See also:**

[changed\(\)](#), [clear\\_changed\(\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::set\\_changed\(\)](#).

**30.47.3.11 void Fl\_Input\_Choice::value (const char \* *val*) [inline]**

Sets or returns the input widget's current contents.

The second form sets the contents using the index into the menu which you can set as an integer. Setting the value effectively 'chooses' this menu item, and sets it as the new input text, deleting the previous text.

References Fl\_Input\_::value().

The documentation for this class was generated from the following file:


- [Fl\\_Input\\_Choice.H](#)

## 30.48 Fl\_Int\_Input Class Reference

The [Fl\\_Int\\_Input](#) class is a subclass of [Fl\\_Input](#) that only allows the user to type decimal digits (or hex numbers of the form 0xaef).

```
#include <Fl_Int_Input.h>
```

Inheritance diagram for Fl\_Int\_Input::



### Public Member Functions

- [Fl\\_Int\\_Input](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Int\\_Input](#) widget using the given position, size, and label string.*

#### 30.48.1 Detailed Description

The [Fl\\_Int\\_Input](#) class is a subclass of [Fl\\_Input](#) that only allows the user to type decimal digits (or hex numbers of the form 0xaef).

#### 30.48.2 Constructor & Destructor Documentation

##### 30.48.2.1 [Fl\\_Int\\_Input::Fl\\_Int\\_Input](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Int\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

Inherited destructor Destroys the widget and any value associated with it.

References [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl\\_Int\\_Input.H](#)

## 30.49 Fl\_JPEG\_Image Class Reference

The [Fl\\_JPEG\\_Image](#) class supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images.

```
#include <Fl_JPEG_Image.h>
```

Inheritance diagram for Fl\_JPEG\_Image::



### Public Member Functions

- [Fl\\_JPEG\\_Image](#) (const char \*filename)

*The constructor loads the JPEG image from the given jpeg filename.*

### 30.49.1 Detailed Description

The [Fl\\_JPEG\\_Image](#) class supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images.

The class supports grayscale and color (RGB) JPEG image files.

### 30.49.2 Constructor & Destructor Documentation

#### 30.49.2.1 Fl\_JPEG\_Image::Fl\_JPEG\_Image (const char \*jpeg)

The constructor loads the JPEG image from the given jpeg filename.

The inherited destructor free all memory and server resources that are used by the image.

References Fl\_Image::d(), Fl\_Image::h(), and Fl\_Image::w().

The documentation for this class was generated from the following files:

- [Fl\\_JPEG\\_Image.H](#)
- [Fl\\_JPEG\\_Image.cxx](#)

## 30.50 Fl\_Label Struct Reference

This struct stores all information for a text or mixed graphics label.

```
#include <Fl_Widget.H>
```

### Public Member Functions

- void `draw` (int, int, int, int, `Fl_Align`) const  
*draw the label aligned to the given box*
- void `measure` (int &w, int &h) const  
*Measures the size of the label.*

### Public Attributes

- const char \* `value`  
*label text*
- `Fl_Image` \* `image`  
*optional image for an active label*
- `Fl_Image` \* `deimage`  
*optional image for a deactivated label*
- uchar `type`  
*type of label.*
- `Fl_Font` `font`  
*label font used in text*
- `Fl_Fontsize` `size`  
*size of label font*
- unsigned `color`  
*text color*

### 30.50.1 Detailed Description

This struct stores all information for a text or mixed graphics label.

#### Todo

For FLTK1.3, the `Fl_Label` type will become a widget by itself. That way we will be avoiding a lot of code duplication by handling labels in a similar fashion to widgets containing text. We also provide an easy interface for very complex labels, containing html or vector graphics.

### 30.50.2 Member Function Documentation

#### 30.50.2.1 void Fl\_Label::draw (int X, int Y, int W, int H, Fl\_Align align) const

draw the label aligned to the given box

draw label with arbitrary alignment in arbitrary box

References image, type, and value.

Referenced by Fl\_Menu\_Item::draw(), Fl\_Choice::draw(), and Fl\_Widget::draw\_label().

#### 30.50.2.2 void Fl\_Label::measure (int & W, int & H) const

Measures the size of the label.

##### Parameters:

↔ *W,H* : this is the requested size for the label text plus image; on return, this will contain the size needed to fit the label

References image, type, and value.

Referenced by Fl\_Menu\_Item::measure(), and Fl\_Widget::redraw\_label().

### 30.50.3 Member Data Documentation

#### 30.50.3.1 uchar Fl\_Label::type

type of label.

##### See also:

[Fl\\_Labeltype](#)

Referenced by Fl\_Menu\_Item::draw(), draw(), Fl\_Choice::draw(), Fl\_Widget::Fl\_Widget(), Fl\_Menu\_Item::measure(), and measure().


The documentation for this struct was generated from the following files:

- [Fl\\_Widget.H](#)
- fl\_labeltype.cxx

## 30.51 Fl\_Light\_Button Class Reference

```
#include <Fl_Light_Button.H>
```

Inheritance diagram for Fl\_Light\_Button::

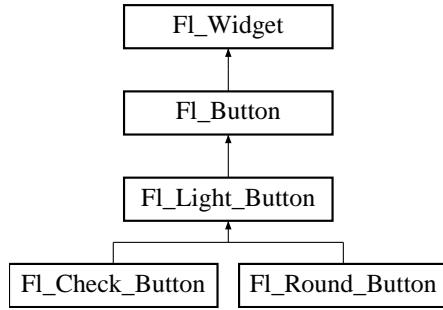

### Public Member Functions

- virtual int [handle](#) (int)

*Handles the specified event.*

- [Fl\\_Light\\_Button](#) (int x, int y, int w, int h, const char \*l=0)

*Creates a new [Fl\\_Light\\_Button](#) widget using the given position, size, and label string.*

### Protected Member Functions

- virtual void [draw](#) ()

*Draw the widget.*

#### 30.51.1 Detailed Description

This subclass displays the "on" state by turning on a light, rather than drawing pushed in. The shape of the "light" is initially set to FL\_DOWN\_BOX. The color of the light when on is controlled with [selection\\_color\(\)](#), which defaults to FL\_YELLOW.

Buttons generate callbacks when they are clicked by the user. You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

Figure 30.17: Fl\_Light\_Button

### 30.51.2 Constructor & Destructor Documentation

#### 30.51.2.1 Fl\_Light\_Button::Fl\_Light\_Button (int X, int Y, int W, int H, const char \*l = 0)

Creates a new [Fl\\_Light\\_Button](#) widget using the given position, size, and label string.

The destructor deletes the check button.

References [Fl\\_Widget::align\(\)](#), [FL\\_ALIGN\\_INSIDE](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_TOGGLE\\_BUTTON](#), [Fl\\_Widget::selection\\_color\(\)](#), and [Fl\\_Widget::type\(\)](#).

### 30.51.3 Member Function Documentation

#### 30.51.3.1 void Fl\_Light\_Button::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Button](#).

References [\\_FL\\_PLASTIC\\_DOWN\\_BOX](#), [\\_FL\\_PLASTIC\\_UP\\_BOX](#), [\\_FL\\_ROUND\\_DOWN\\_BOX](#), [\\_FL\\_ROUND\\_UP\\_BOX](#), [Fl\\_Widget::active\\_r\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Button::down\\_box\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Widget::draw\\_focus\(\)](#), [Fl\\_Widget::draw\\_label\(\)](#), [fl\\_arc\(\)](#), [FL\\_BACKGROUND2\\_COLOR](#), [fl\\_color\(\)](#), [FL\\_DOWN\\_BOX](#), [fl\\_line\(\)](#), [fl\\_pie\(\)](#), [fl\\_rectf\(\)](#), [FL\\_SELECTION\\_COLOR](#), [FL\\_THIN\\_DOWN\\_BOX](#), [FL\\_UP\\_BOX](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::labelsize\(\)](#), [Fl::pushed\(\)](#), [Fl::scheme\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [Fl\\_Button::value\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.51.3.2 int Fl\_Light\_Button::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Button](#).

References [Fl\\_Widget::box\(\)](#), [FL\\_RELEASE](#), and [Fl\\_Widget::redraw\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Light\\_Button.H](#)
- [Fl\\_Light\\_Button.cxx](#)

## 30.52 Fl\_Menu\_ Class Reference

Base class of all widgets that have a menu in FLTK.

```
#include <Fl_Menu_.H>
```

Inheritance diagram for Fl\_Menu\_::

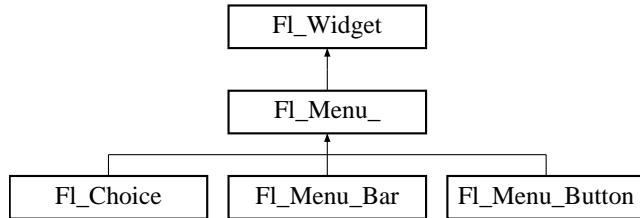

### Public Member Functions

- **Fl\_Menu\_ (int, int, int, int, const char \*=0)**  
*Creates a new **Fl\_Menu\_** widget using the given position, size, and label string.*
- int **item.pathname (char \*name, int namelen, const Fl\_Menu\_Item \*finditem=0) const**  
*Set 'pathname' of specified menuitem If finditem==NULL, **mvalue()** is used (the most recently picked menuitem) Returns:*
  - 0 : OK
  - -1 : item not found (name=="")
  - -2 : 'name' not large enough (name=="").
- const **Fl\_Menu\_Item \* picked (const Fl\_Menu\_Item \*)**  
*When user picks a menu item, call this.*
- const **Fl\_Menu\_Item \* find\_item (const char \*name)**  
*Find menu item index, given menu pathname eg.*
- const **Fl\_Menu\_Item \* test\_shortcut ()**  
*Internal use only.*
- void **global ()**  
*Make the shortcuts for this menu work no matter what window has the focus when you type it.*
- const **Fl\_Menu\_Item \* menu () const**  
*Returns a pointer to the array of **Fl\_Menu\_Items**.*
- void **menu (const Fl\_Menu\_Item \*m)**  
*Sets the menu array pointer directly.*
- void **copy (const Fl\_Menu\_Item \*m, void \*user\_data=0)**  
*Sets the menu array pointer with a copy of m that will be automatically deleted.*
- int **add (const char \*, int shortcut, Fl\_Callback \*, void \*=0, int=0)**

*Adds a new menu item, with a title string, shortcut int (or string), callback, argument to the callback, and flags.*

- int **add** (const char \*a, const char \*b, **Fl\_Callback** \*c, void \*d=0, int e=0)

*See int [Fl\\_Menu\\_::add](#)(const char\* label, int shortcut, Fl\_Callback\*, void \*user\_data=0, int flags=0).*

- int **add** (const char \*)

*This is a Forms (and SGI GL library) compatible add function, it adds many menu items, with '|' separating the menu items, and tab separating the menu item names from an optional shortcut string.*

- int **size** () const

*This returns the number of [Fl\\_Menu\\_Item](#) structures that make up the menu, correctly counting submenus.*

- void **size** (int W, int H)

*Change the size of the widget.*

- void **clear** ()

*Same as menu(NULL), set the array pointer to null, indicating a zero-length menu.*

- void **replace** (int, const char \*)

*Changes the text of item n.*

- void **remove** (int)

*Deletes item n from the menu.*

- void **shortcut** (int i, int s)

*Changes the shortcut of item i to n.*

- void **mode** (int i, int fl)

*Sets the flags of item i.*

- int **mode** (int i) const

*Gets the flags of item i.*

- const **Fl\_Menu\_Item** \* **mvalue** () const

*Returns a pointer to the last menu item that was picked.*

- int **value** () const

*Returns the index into [menu\(\)](#) of the last item chosen by the user.*

- int **value** (const **Fl\_Menu\_Item** \*)

*The value is the index into [menu\(\)](#) of the last item chosen by the user.*

- int **value** (int i)

*The value is the index into [menu\(\)](#) of the last item chosen by the user.*

- const char \* **text** () const

*Returns the title of the last item chosen, or of item i.*

- const char \* **text** (int i) const

*Returns the title of the last item chosen, or of item i.*

- **Fl\_Font textfont () const**  
*Gets the current font of menu item labels.*
- **void textfont (Fl\_Font c)**  
*Sets the current font of menu item labels.*
- **Fl\_Fontsize textsize () const**  
*Gets the font size of menu item labels.*
- **void textsize (Fl\_Fontsize c)**  
*Sets the font size of menu item labels.*
- **Fl\_Color textcolor () const**  
*Get the current color of menu item labels.*
- **void textcolor (unsigned c)**  
*Sets the current color of menu item labels.*
- **Fl\_Boxtype down\_box () const**  
*This box type is used to surround the currently-selected items in the menus.*
- **void down\_box (Fl\_Boxtype b)**  
*See Fl\_Boxtype [Fl\\_Menu\\_::down\\_box\(\)](#) const.*
- **Fl\_Color down\_color () const**  
*For back compatibility, same as [selection\\_color\(\)](#).*
- **void down\_color (unsigned c)**  
*For back compatibility, same as [selection\\_color\(\)](#).*

## Protected Attributes

- **uchar alloc**
- **uchar down\_box\_**
- **Fl\_Font textfont\_**
- **Fl\_Fontsize textsize\_**
- **unsigned textcolor\_**

### 30.52.1 Detailed Description

Base class of all widgets that have a menu in FLTK.

Currently FLTK provides you with [Fl\\_Menu\\_Button](#), [Fl\\_Menu\\_Bar](#), and [Fl\\_Choice](#).

The class contains a pointer to an array of structures of type [Fl\\_Menu\\_Item](#). The array may either be supplied directly by the user program, or it may be "private": a dynamically allocated array managed by the [Fl\\_Menu\\_](#).

## 30.52.2 Constructor & Destructor Documentation

### 30.52.2.1 `Fl_Menu_::Fl_Menu_ (int X, int Y, int W, int H, const char * l = 0)`

Creates a new `Fl_Menu_` widget using the given position, size, and label string.

`menu()` is initialized to null.

References `Fl_Widget::box()`, `down_box()`, `FL_FOREGROUND_COLOR`, `FL_HELVETICA`, `FL_NO_BOX`, `FL_NORMAL_SIZE`, `FL_SELECTION_COLOR`, `FL_UP_BOX`, `FL_WHEN_RELEASE_ALWAYS`, `Fl_Widget::selection_color()`, `Fl_Widget::set_flag()`, `Fl_Widget::SHORTCUT_LABEL`, `text-color()`, `textfont()`, `textsize()`, and `Fl_Widget::when()`.

## 30.52.3 Member Function Documentation

### 30.52.3.1 `int Fl_Menu_::add (const char * str)`

This is a Forms (and SGI GL library) compatible add function, it adds many menu items, with '|' separating the menu items, and tab separating the menu item names from an optional shortcut string.

The passed string is split at any '|' characters and then `add(s,0,0,0,0)` is done with each section. This is often useful if you are just using the value, and is compatible with Forms and other GL programs. The section strings use the same special characters as described for the long version of `add()`

No items must be added to a menu during a callback to the same menu.

### 30.52.3.2 `int Fl_Menu_::add (const char * t, int s, Fl_Callback * c, void * v = 0, int f = 0)`

Adds a new menu item, with a title string, shortcut int (or string), callback, argument to the callback, and flags.

If the menu array was directly set with `menu(x)` then `copy()` is done to make a private array.

The characters "&", "/", "\\", and "\_" are treated as special characters in the label string. The "&" character specifies that the following character is an accelerator and will be underlined. The "\\" character is used to escape the next character in the string. Labels starting with the "\_" character cause a divider to be placed after that menu item.

A label of the form "foo/bar/baz" will create a submenus called "foo" and "bar" with an entry called "baz". The "/" character is ignored if it appears as the first character of the label string, e.g. "/foo/bar/baz".

The label string is copied to new memory and can be freed. The other arguments (including the shortcut) are copied into the menu item unchanged.

If an item exists already with that name then it is replaced with this new one. Otherwise this new one is added to the end of the correct menu or submenu. The return value is the offset into the array that the new entry was placed at.

Shortcut can be 0L, or either a modifier/key combination (for example `FL_CTRL+A`) or a string describing the shortcut in one of two ways:

```
[#+^]<ascii_value>;    eg. "97", "^97", "+97", "#97"
[#+^]<ascii_char>;    eg. "a", "^a", "+a", "#a"
```

..where `<ascii_value>` is a decimal value representing an ascii character (eg. 97 is the ascii for 'a'), and the optional prefixes enhance the value that follows. Multiple prefixes must appear in the above order.

```
# - Alt
+ - Shift
^ - Control
```

Text shortcuts are converted to integer shortcut by calling int fl\_old\_shortcut(const char\*).

The return value is the index into the array that the entry was put.

No items must be added to a menu during a callback to the same menu.

References Fl\_Menu\_Item::add(), copy(), menu\_, size(), and value\_.

Referenced by Fl\_File\_Chooser::filter(), and Fl\_File\_Chooser::rescan\_keep\_filename().

### 30.52.3.3 void Fl\_Menu\_::clear ()

Same as menu(NULL), set the array pointer to null, indicating a zero-length menu.

Menus must no be cleared during a callback to the same menu.

References size(), and text().

Referenced by Fl\_File\_Chooser::filter(), menu(), and Fl\_File\_Chooser::rescan\_keep\_filename().

### 30.52.3.4 void Fl\_Menu\_::copy (const Fl\_Menu\_Item \* m, void \* ud = 0)

Sets the menu array pointer with a copy of m that will be automatically deleted.

If ud is not NULL, then all user data pointers are changed in the menus as well. See void [Fl\\_Menu\\_::menu\(const Fl\\_Menu\\_Item\\* m\)](#).

References Fl\_Menu\_Item::callback\_, menu(), Fl\_Menu\_Item::size(), and Fl\_Menu\_Item::user\_data\_.

Referenced by add(), remove(), and replace().

### 30.52.3.5 Fl\_Boxtype Fl\_Menu\_::down\_box () const [inline]

This box type is used to surround the currently-selected items in the menus.

If this is FL\_NO\_BOX then it acts like FL\_THIN\_UP\_BOX and [selection\\_color\(\)](#) acts like FL\_WHITE, for back compatibility.

Referenced by Fl\_Menu\_Item::draw(), Fl\_Choice::Fl\_Choice(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Menu\_(), and Fl\_Menu\_Button::Fl\_Menu\_Button().

### 30.52.3.6 const Fl\_Menu\_Item \* Fl\_Menu\_::find\_item (const char \* name)

Find menu item index, given menu pathname eg.

"Edit/Copy" Will also return submenus, eg. "Edit" Returns NULL if not found.

References Fl\_Menu\_Item::flags, Fl\_Menu\_Item::label(), and size().

### 30.52.3.7 void Fl\_Menu\_::global ()

Make the shortcuts for this menu work no matter what window has the focus when you type it.

This is done by using [Fl::add\\_handler\(\)](#). This [Fl\\_Menu\\_](#) widget does not have to be visible (ie the window it is in can be hidden, or it does not have to be put in a window at all).

Currently there can be only one [global\(\)](#)menu. Setting a new one will replace the old one. There is no way to remove the [global\(\)](#) setting (so don't destroy the widget!)

References [Fl::add\\_handler\(\)](#).

### **30.52.3.8 void Fl\_Menu\_::menu (const Fl\_Menu\_Item \* m)**

Sets the menu array pointer directly.

If the old menu is private it is deleted. NULL is allowed and acts the same as a zero-length menu. If you try to modify the array (with [add\(\)](#), [replace\(\)](#), or [delete\(\)](#)) a private copy is automatically done.

References [clear\(\)](#).

### **30.52.3.9 const Fl\_Menu\_Item\* Fl\_Menu\_::menu () const [inline]**

Returns a pointer to the array of [Fl\\_Menu\\_Items](#).

This will either be the value passed to menu(value) or the private copy.

Referenced by [copy\(\)](#), [Fl\\_Menu\\_Bar::draw\(\)](#), [Fl\\_Color\\_Chooser::Fl\\_Color\\_Chooser\(\)](#), [Fl\\_Menu\\_Button::handle\(\)](#), [Fl\\_Menu\\_Bar::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [item\\_pathname\(\)](#), [Fl\\_Menu\\_Button::popup\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

### **30.52.3.10 int Fl\_Menu\_::mode (int i) const [inline]**

Gets the flags of item i.

For a list of the flags, see [Fl\\_Menu\\_Item](#).

### **30.52.3.11 void Fl\_Menu\_::mode (int i, int fl) [inline]**

Sets the flags of item i.

For a list of the flags, see [Fl\\_Menu\\_Item](#).

### **30.52.3.12 const Fl\_Menu\_Item\* Fl\_Menu\_::mvalue () const [inline]**

Returns a pointer to the last menu item that was picked.

Referenced by [Fl\\_Choice::draw\(\)](#), [Fl\\_Choice::handle\(\)](#), [item\\_pathname\(\)](#), and [Fl\\_Menu\\_Button::popup\(\)](#).

### **30.52.3.13 const Fl\_Menu\_Item \* Fl\_Menu\_::picked (const Fl\_Menu\_Item \* v)**

When user picks a menu item, call this.

It will do the callback. Unfortunatly this also casts away const for the checkboxes, but this was necessary so non-checkbox menus can really be declared const...

References [Fl\\_Menu\\_Item::callback\\_](#), [Fl\\_Widget::changed\(\)](#), [Fl\\_Widget::do\\_callback\(\)](#), [Fl\\_Menu\\_Item::do\\_callback\(\)](#), [FL\\_WHEN\\_CHANGED](#), [FL\\_WHEN\\_NOT\\_CHANGED](#), [FL\\_WHEN\\_RELEASE](#),

Fl\_Menu\_Item::flags, Fl\_Menu\_Item::radio(), Fl\_Widget::redraw(), Fl\_Widget::set\_changed(), Fl\_Menu\_Item::value(), and Fl\_Widget::when().

Referenced by Fl\_Menu\_Bar::handle(), Fl\_Choice::handle(), and Fl\_Menu\_Button::popup().

### 30.52.3.14 void Fl\_Menu::remove (int i)

Deletes item n from the menu.

If the menu array was directly set with menu(x) then [copy\(\)](#) is done to make a private array.

No items must be removed from a menu during a callback to the same menu.

References [copy\(\)](#), Fl\_Menu\_Item::next(), size(), and Fl\_Menu\_Item::text.

### 30.52.3.15 void Fl\_Menu::replace (int i, const char \* str)

Changes the text of item n.

This is the only way to get slash into an [add\(\)](#)'ed menu item. If the menu array was directly set with menu(x) then [copy\(\)](#) is done to make a private array.

References [copy\(\)](#), size(), and Fl\_Menu\_Item::text.

### 30.52.3.16 void Fl\_Menu::shortcut (int i, int s) [inline]

Changes the shortcut of item i to n.

### 30.52.3.17 void Fl\_Menu::size (int W, int H) [inline]

Change the size of the widget.

size(w,h) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

#### Parameters:

← *W,H* new size

#### See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::size\(\)](#).

### 30.52.3.18 int Fl\_Menu::size () const

This returns the number of [Fl\\_Menu\\_Item](#) structures that make up the menu, correctly counting submenus.

This includes the "terminator" item at the end. To copy a menu array you need to copy [size\(\) \\* sizeof\(Fl\\_Menu\\_Item\)](#) bytes. If the menu is NULL this returns zero (an empty menu will return 1).

References [Fl\\_Menu\\_Item::size\(\)](#).

Referenced by [add\(\)](#), [clear\(\)](#), [find\\_item\(\)](#), [item.pathname\(\)](#), [remove\(\)](#), [replace\(\)](#), [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#), and [Fl\\_Choice::value\(\)](#).

**30.52.3.19 const Fl\_Menu\_Item\* Fl\_Menu\_::test\_shortcut () [inline]**

Internal use only.

Reimplemented from [Fl\\_Widget](#).

References `test_shortcut()`.

Referenced by `Fl_Menu_Button::handle()`, `Fl_Menu_Bar::handle()`, and `test_shortcut()`.

**30.52.3.20 const char\* Fl\_Menu\_::text (int i) const [inline]**

Returns the title of the last item chosen, or of item i.

**30.52.3.21 const char\* Fl\_Menu\_::text () const [inline]**

Returns the title of the last item chosen, or of item i.

Referenced by `clear()`, `Fl_Menu_Bar::draw()`, `Fl_Menu_Button::handle()`, `Fl_Menu_Bar::handle()`, `Fl_Choice::handle()`, and `Fl_File_Chooser::rescan_keep_filename()`.

**30.52.3.22 void Fl\_Menu\_::textcolor (unsigned c) [inline]**

Sets the current color of menu item labels.

**30.52.3.23 Fl\_Color Fl\_Menu\_::textcolor () const [inline]**

Get the current color of menu item labels.

Referenced by `Fl_Menu_Item::draw()`, `Fl_Choice::draw()`, and `Fl_Menu_()`.

**30.52.3.24 void Fl\_Menu\_::textfont (Fl\_Font c) [inline]**

Sets the current font of menu item labels.

**30.52.3.25 Fl\_Font Fl\_Menu\_::textfont () const [inline]**

Gets the current font of menu item labels.

Referenced by `Fl_Menu_Item::draw()`, `Fl_Choice::draw()`, `Fl_Choice::Fl_Choice()`, `Fl_Color_Chooser::Fl_Color_Chooser()`, `Fl_Menu_()`, and `Fl_Menu_Item::measure()`.

**30.52.3.26 void Fl\_Menu\_::textsize (Fl\_Fontsize c) [inline]**

Sets the font size of menu item labels.

**30.52.3.27 Fl\_Fontsize Fl\_Menu\_::textsize () const [inline]**

Gets the font size of menu item labels.

Referenced by `Fl_Menu_Item::draw()`, `Fl_Choice::draw()`, `Fl_Menu_()`, and `Fl_Menu_Item::measure()`.

**30.52.3.28 int Fl\_Menu\_::value (int *i*) [inline]**

The value is the index into [menu\(\)](#) of the last item chosen by the user.

It is zero initially. You can set it as an integer, or set it with a pointer to a menu item. The set routines return non-zero if the new value is different than the old one.

Reimplemented in [Fl\\_Choice](#).

References [value\(\)](#).

Referenced by [value\(\)](#).

**30.52.3.29 int Fl\_Menu\_::value (const Fl\_Menu\_Item \* *m*)**

The value is the index into [menu\(\)](#) of the last item chosen by the user.

It is zero initially. You can set it as an integer, or set it with a pointer to a menu item. The set routines return non-zero if the new value is different than the old one.

Reimplemented in [Fl\\_Choice](#).

References [Fl\\_Widget::clear\\_changed\(\)](#).

**30.52.3.30 int Fl\_Menu\_::value () const [inline]**

Returns the index into [menu\(\)](#) of the last item chosen by the user.

It is zero initially.

Reimplemented in [Fl\\_Choice](#).

Referenced by [Fl\\_Choice::value\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Menu\\_.H](#)
- [Fl\\_Menu\\_.cxx](#)
- [Fl\\_Menu\\_add.cxx](#)
- [Fl\\_Menu\\_global.cxx](#)

## 30.53 Fl\_Menu\_Bar Class Reference

This widget provides a standard menubar interface.

```
#include <Fl_Menu_Bar.h>
```

Inheritance diagram for Fl\_Menu\_Bar::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Menu\\_Bar](#) (int X, int Y, int W, int H, const char \*l=0)  
*Creates a new [Fl\\_Menu\\_Bar](#) widget using the given position, size, and label string.*

### Protected Member Functions

- void [draw](#) ()  
*Draw the widget.*

#### 30.53.1 Detailed Description

This widget provides a standard menubar interface.

Usually you will put this widget along the top edge of your window. The height of the widget should be 30 for the menu titles to draw correctly with the default font.

The items on the bar and the menus they bring up are defined by a single [Fl\\_Menu\\_Item](#) array. Because a [Fl\\_Menu\\_Item](#) array defines a hierarchy, the top level menu defines the items in the menubar, while the submenus define the pull-down menus. Sub-sub menus and lower pop up to the right of the submenus.




Figure 30.18: menubar

If there is an item in the top menu that is not a title of a submenu, then it acts like a "button" in the menubar. Clicking on it will pick it.

When the user picks an item off the menu, the item's callback is done with the menubar as the `Fl_Widget*` argument. If the item does not have a callback the menubar's callback is done instead.

Submenus will also pop up in response to shortcuts indicated by putting a '&' character in the name field of the menu item. If you put a '&' character in a top-level "button" then the shortcut picks it. The '&' character in submenus is ignored until the menu is popped up.

Typing the `shortcut()` of any of the menu items will cause callbacks exactly the same as when you pick the item with the mouse.

### 30.53.2 Constructor & Destructor Documentation

#### 30.53.2.1 `Fl_Menu_Bar::Fl_Menu_Bar (int X, int Y, int W, int H, const char *l = 0)` [inline]

Creates a new `Fl_Menu_Bar` widget using the given position, size, and label string.

The default boxtyle is `FL_UP_BOX`.

The constructor sets `menu()` to NULL. See `Fl_Menu_` for the methods to set or change the menu.

`labelsize()`, `labelfont()`, and `labelcolor()` are used to control how the menubar items are drawn. They are initialized from the `Fl_Menu` static variables, but you can change them if desired.

`label()` is ignored unless you change `align()` to put it outside the menubar.

The destructor removes the `Fl_Menu_Bar` widget and all of its menu items.

### 30.53.3 Member Function Documentation

#### 30.53.3.1 `void Fl_Menu_Bar::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dy()`, `Fl_Menu_Item::draw()`, `Fl_Widget::draw_box()`, `fl_color()`, `fl_yxline()`, `Fl_Menu_Item::flags`, `Fl_Widget::h()`, `Fl_Menu_Item::measure()`, `Fl_Menu_::menu()`, `Fl_Menu_Item::next()`, `Fl_Menu_Item::text`, `Fl_Menu_::text()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

#### 30.53.3.2 `int Fl_Menu_Bar::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References `Fl_Menu_Item::find_shortcut()`, `FL_ENTER`, `FL_LEAVE`, `FL_PUSH`, `FL_SHORTCUT`, `Fl_Widget::h()`, `Fl_Menu_::menu()`, `Fl_Menu_::picked()`, `Fl_Menu_Item::popup()`, `Fl_Menu_Item::submenu()`, `Fl_Menu_::test_shortcut()`, `Fl_Menu_::text()`, `Fl_Widget::visible_r()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

The documentation for this class was generated from the following files:


- [Fl\\_Menu\\_Bar.H](#)
- [Fl\\_Menu\\_Bar.cxx](#)

## 30.54 Fl\_Menu\_Button Class Reference

This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of [Fl\\_Menu\\_Item](#) objects.

```
#include <Fl_Menu_Button.h>
```

Inheritance diagram for Fl\_Menu\_Button::



### Public Types

- enum {  
    **POPUP1** = 1, **POPUP2**, **POPUP12**, **POPUP3**,  
    **POPUP13**, **POPUP23**, **POPUP123** }

### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- const [Fl\\_Menu\\_Item](#) \* [popup](#) ()  
*Act exactly as though the user clicked the button or typed the shortcut key.*
- [Fl\\_Menu\\_Button](#) (int, int, int, int, const char \*=0)  
*Creates a new [Fl\\_Menu\\_Button](#) widget using the given position, size, and label string.*

### Protected Member Functions

- void [draw](#) ()  
*Draw the widget.*

#### 30.54.1 Detailed Description

This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of [Fl\\_Menu\\_Item](#) objects.



Figure 30.19: menu\_button

Normally any mouse button will pop up a menu and it is lined up below the button as shown in the picture. However an [FL\\_Menu\\_Button](#) may also control a pop-up menu. This is done by setting the [type\(\)](#) , see below.

The menu will also pop up in response to shortcuts indicated by putting a '&' character in the [label\(\)](#).

Typing the [shortcut\(\)](#) of any of the menu items will cause callbacks exactly the same as when you pick the item with the mouse. The '&' character in menu item names are only looked at when the menu is popped up, however.

When the user picks an item off the menu, the item's callback is done with the menu\_button as the [Fl\\_Widget\\*](#) argument. If the item does not have a callback the menu\_button's callback is done instead.

### 30.54.2 Constructor & Destructor Documentation

#### 30.54.2.1 [FL\\_Menu\\_Button::FL\\_Menu\\_Button \(int X, int Y, int W, int H, const char \\*l = 0\)](#)

Creates a new [FL\\_Menu\\_Button](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_UP\\_BOX](#).

The constructor sets [menu\(\)](#) to NULL. See [FL\\_Menu\\_](#) for the methods to set or change the menu.

References [Fl\\_Menu\\_::down\\_box\(\)](#), and [FL\\_NO\\_BOX](#).

### 30.54.3 Member Function Documentation

#### 30.54.3.1 [void FL\\_Menu\\_Button::draw \(\) \[protected, virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `fl_color()`, `FL_FLAT_BOX`, `fl_line()`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Widget::labelsize()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.54.3.2 int Fl\_Menu\_Button::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

$\leftarrow$  *event* the kind of event received

#### Return values:

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References `Fl_Widget::box()`, `Fl::event_button()`, `Fl::event_key()`, `Fl::event_state()`, `FL_ALT`, `FL_CTRL`, `FL_ENTER`, `FL_FOCUS`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_META`, `FL_PUSH`, `FL_SHIFT`, `FL_SHORTCUT`, `FL_UNFOCUS`, `Fl::focus()`, `Fl_Menu_::menu()`, `popup()`, `Fl_Widget::redraw()`, `Fl_Menu_::test_shortcut()`, `Fl_Widget::test_shortcut()`, `Fl_Menu_::text()`, `Fl_Widget::type()`, and `Fl::visible_focus()`.

### 30.54.3.3 const Fl\_Menu\_Item \* Fl\_Menu\_Button::popup ()

Act exactly as though the user clicked the button or typed the shortcut key.

The menu appears, it waits for the user to pick an item, and if they pick one it sets [value\(\)](#) and does the callback or sets [changed\(\)](#) as described above. The menu item is returned or NULL if the user dismisses the menu.

References `Fl_Widget::box()`, `Fl::event_x()`, `Fl::event_y()`, `Fl_Widget::h()`, `Fl_Widget::label()`, `Fl_Menu_::menu()`, `Fl_Menu_::mvalue()`, `Fl_Menu_::picked()`, `Fl_Menu_Item::popup()`, `Fl_Menu_::Item::popup()`, `Fl_Widget::redraw()`, `Fl::release_widget_pointer()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl::watch_widget_pointer()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by [handle\(\)](#).

The documentation for this class was generated from the following files:

- [Fl\\_Menu\\_Button.H](#)
- [Fl\\_Menu\\_Button.cxx](#)

## 30.55 Fl\_Menu\_Item Struct Reference

The [Fl\\_Menu\\_Item](#) structure defines a single menu item that is used by the [Fl\\_Menu\\_](#) class.

```
#include <Fl_Menu_Item.h>
```

### Public Member Functions

- const [Fl\\_Menu\\_Item](#) \* **next** (int=1) const  
*Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items.*
- [Fl\\_Menu\\_Item](#) \* **next** (int i=1)  
*Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items.*
- const [Fl\\_Menu\\_Item](#) \* **first** () const  
*Returns the first menu item, same as next(0).*
- [Fl\\_Menu\\_Item](#) \* **first** ()  
*Returns the first menu item, same as next(0).*
- const char \* **label** () const  
*This is the title of the item.*
- void **label** (const char \*a)  
*See const char\* [Fl\\_Menu\\_Item::label\(\)](#) const.*
- void **label** ([Fl\\_Labeltype](#) a, const char \*b)  
*See const char\* [Fl\\_Menu\\_Item::label\(\)](#) const.*
- [Fl\\_Labeltype](#) **labeltype** () const  
*A labeltype identifies a routine that draws the label of the widget.*
- void **labeltype** ([Fl\\_Labeltype](#) a)  
*A labeltype identifies a routine that draws the label of the widget.*
- [Fl\\_Color](#) **labelcolor** () const  
*This color is passed to the labeltype routine, and is typically the color of the label text.*
- void **labelcolor** (unsigned a)  
*See [Fl\\_Color](#) [Fl\\_Menu\\_Item::labelcolor\(\)](#) const.*
- [Fl\\_Font](#) **labelfont** () const  
*FONTS ARE IDENTIFIED BY SMALL 8-BIT INDEXES INTO A TABLE.*
- void **labelfont** ([Fl\\_Font](#) a)  
*FONTS ARE IDENTIFIED BY SMALL 8-BIT INDEXES INTO A TABLE.*
- [Fl\\_Fontsize](#) **labelsize** () const  
*GETS OR SETS THE LABEL FONT PIXEL SIZE/HEIGHT.*

- void **labelsize** (Fl\_Fontsize a)  
*Sets the label font pixel size/height.*
- **Fl\_Callback\_p callback () const**  
*Each item has space for a callback function and an argument for that function.*
- void **callback** (Fl\_Callback \*c, void \*p)  
*See Fl\_Callback\_p Fl\_MenuItem::callback() const.*
- void **callback** (Fl\_Callback \*c)  
*See Fl\_Callback\_p Fl\_MenuItem::callback() const.*
- void **callback** (Fl\_Callback0 \*c)  
*See Fl\_Callback\_p Fl\_MenuItem::callback() const.*
- void **callback** (Fl\_Callback1 \*c, long p=0)  
*See Fl\_Callback\_p Fl\_MenuItem::callback() const.*
- void \* **user\_data () const**  
*Get or set the user\_data argument that is sent to the callback function.*
- void **user\_data** (void \*v)  
*Get or set the user\_data argument that is sent to the callback function.*
- long **argument () const**  
*For convenience you can also define the callback as taking a long argument.*
- void **argument** (long v)  
*For convenience you can also define the callback as taking a long argument.*
- int **shortcut () const**  
*Gets what key combination shortcut will trigger the menu item.*
- void **shortcut** (int s)  
*Sets exactly what key combination will trigger the menu item.*
- int **submenu () const**  
*Returns true if either FL\_SUBMENU or FL\_SUBMENU\_POINTER is on in the flags.*
- int **checkbox () const**  
*Returns true if a checkbox will be drawn next to this item.*
- int **radio () const**  
*Returns true if this item is a radio item.*
- int **value () const**  
*Returns the current value of the check or radio item.*
- void **set ()**  
*Turns the check or radio item "on" for the menu item.*

- void **clear** ()
 

*Turns the check or radio item "off" for the menu item.*
- void **setonly** ()
 

*Turns the radio item "on" for the menu item and turns off adjacent radio items set.*
- int **visible** () const
 

*Gets the visibility of an item.*
- void **show** ()
 

*Makes an item visible in the menu.*
- void **hide** ()
 

*Hides an item in the menu.*
- int **active** () const
 

*Get whether or not the item can be picked.*
- void **activate** ()
 

*Allows a menu item to be picked.*
- void **deactivate** ()
 

*Prevents a menu item from being picked.*
- int **activevisible** () const
 

*Returns non 0 if FL\_INACTIVE and FL\_INVISIBLE are cleared, 0 otherwise.*
- void **image** (Fl\_Image \*a)
 

*compatibility api for FLUID, same as a->label(this)*
- void **image** (Fl\_Image &a)
 

*compatibility api for FLUID, same as a.label(this)*
- int **measure** (int \*h, const Fl\_Menu\_ \*) const
 

*Measures width of label, including effect of & characters.*
- void **draw** (int x, int y, int w, int h, const Fl\_Menu\_ \*, int t=0) const
 

*Draws the menu item in bounding box x,y,w,h, optionally selects the item.*
- const Fl\_Menu\_Item \* **popup** (int X, int Y, const char \*title=0, const Fl\_Menu\_Item \*picked=0, const Fl\_Menu\_ \*=0) const
 

*This method is called by widgets that want to display menus.*
- const Fl\_Menu\_Item \* **pulldown** (int X, int Y, int W, int H, const Fl\_Menu\_Item \*picked=0, const Fl\_Menu\_ \*=0, const Fl\_Menu\_Item \*title=0, int menubar=0) const
 

*Pulldown() is similar to popup(), but a rectangle is provided to position the menu.*
- const Fl\_Menu\_Item \* **test\_shortcut** () const
 

*This is designed to be called by a widgets handle() method in response to a FL\_SHORTCUT event.*

- const [Fl\\_Menu\\_Item](#) \* [find\\_shortcut](#) (int \*ip=0) const  
*Search only the top level menu for a shortcut.*
- void [do\\_callback](#) ([Fl\\_Widget](#) \*o) const  
*Call the [Fl\\_Menu\\_Item](#) item's callback, and provide the [Fl\\_Widget](#) argument (and optionally override the [user\\_data\(\)](#) argument).*
- void [do\\_callback](#) ([Fl\\_Widget](#) \*o, void \*arg) const  
*Call the [Fl\\_Menu\\_Item](#) item's callback, and provide the [Fl\\_Widget](#) argument (and optionally override the [user\\_data\(\)](#) argument).*
- void [do\\_callback](#) ([Fl\\_Widget](#) \*o, long arg) const  
*Call the [Fl\\_Menu\\_Item](#) item's callback, and provide the [Fl\\_Widget](#) argument (and optionally override the [user\\_data\(\)](#) argument).*
- int [checked](#) () const  
*back compatibility only*
- void [check](#) ()  
*back compatibility only*
- void [uncheck](#) ()  
*back compatibility only*
- int [add](#) (const char \*, int shortcut, [Fl\\_Callback](#) \*, void \*=0, int=0)  
*Adds an item.*
- int [add](#) (const char \*a, const char \*b, [Fl\\_Callback](#) \*c, void \*d=0, int e=0)  
*See int [add\(const char\\*, int shortcut, Fl\\_Callback\\*, void\\*, int\)](#).*
- int [size](#) () const  
*Size of the menu starting from this menu item.*

## Public Attributes

- const char \* [text](#)  
*menu item text, returned by [label\(\)](#)*
- int [shortcut\\_](#)  
*menu item shortcut*
- [Fl\\_Callback](#) \* [callback\\_](#)  
*menu item callback*
- void \* [user\\_data\\_](#)  
*menu item user\_data for 3rd party apps*
- int [flags](#)

*menu item flags like FL\_MENU\_TOGGLE,FL\_MENU\_RADIO*

- **uchar labeltype\_**  
*how the menu item text looks like*
- **Fl\_Font labelfont\_**  
*which font for this menu item text*
- **Fl\_Fontsize labelsize\_**  
*size of menu item text*
- **unsigned labelcolor\_**  
*menu item text color*

### 30.55.1 Detailed Description

The [Fl\\_Menu\\_Item](#) structure defines a single menu item that is used by the [Fl\\_Menu\\_](#) class.

```
struct Fl_Menu_Item {
    const char*          text; // label()
    ulong                shortcut_;
    Fl_Callback*         callback_;
    void*                user_data_;
    int                  flags;
    uchar                labeltype_;
    uchar                labelfont_;
    uchar                labelsize_;
    uchar                labelcolor_;
};

enum { // values for flags:
    FL_MENU_INACTIVE      = 1,
    FL_MENU_TOGGLE        = 2,
    FL_MENU_VALUE         = 4,
    FL_MENU_RADIO         = 8,
    FL_MENU_INVISIBLE     = 0x10,
    FL_SUBMENU_POINTER    = 0x20,
    FL_SUBMENU             = 0x40,
    FL_MENU_DIVIDER       = 0x80,
    FL_MENU_HORIZONTAL    = 0x100
};
```

Typically menu items are statically defined; for example:

```
Fl_Menu_Item popup[] = {
    {"&alpha",   FL_ALT+'a', the_cb, (void*)1},
    {"&beta",    FL_ALT+'b', the_cb, (void*)2},
    {"gamma",    FL_ALT+'c', the_cb, (void*)3, FL_MENU_DIVIDER},
    {"&strange", 0, strange_cb},
    {"&charm",   0, charm_cb},
    {"&truth",   0, truth_cb},
    {"b&eauty",  0, beauty_cb},
    {"sub&menu",  0, 0, 0, FL_SUBMENU},
    {"one"}, {"two"}, {"three"}, {0},
    {"inactive", FL_ALT+'i', 0, 0, FL_MENU_INACTIVE|FL_MENU_DIVIDER},
```

```
{"invisible",FL_ALT+'i', 0, 0, FL_MENU_INVISIBLE},
 {"check",      FL_ALT+'i', 0, 0, FL_MENU_TOGGLE|FL_MENU_VALUE},
 {"box",        FL_ALT+'i', 0, 0, FL_MENU_TOGGLE},
 {0}};
```

produces:

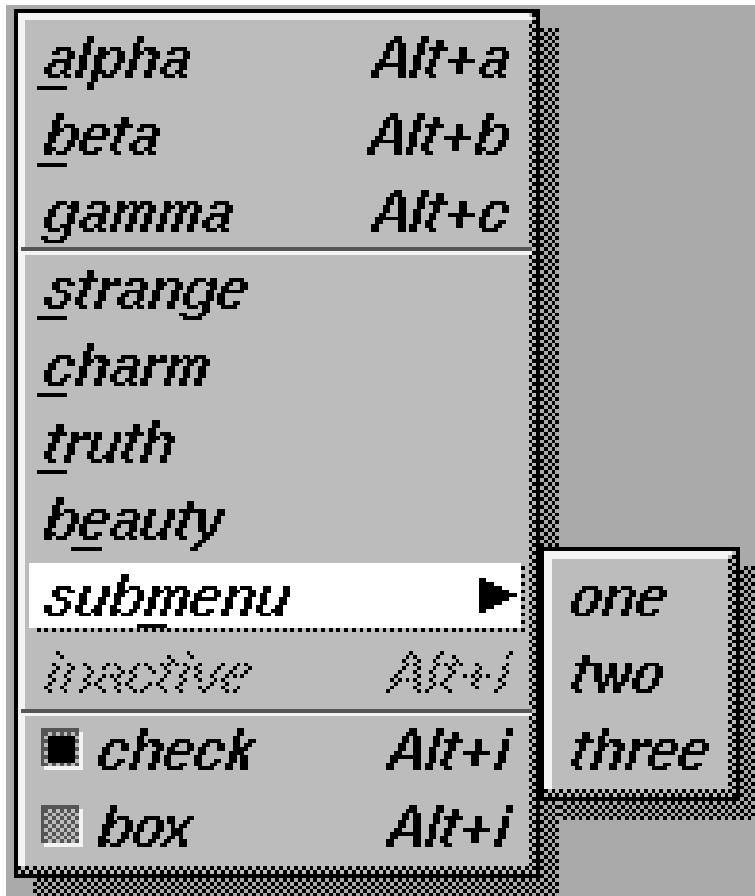


Figure 30.20: menu

A submenu title is identified by the bit FL\_SUBMENU in the flags field, and ends with a [label\(\)](#) that is NULL. You can nest menus to any depth. A pointer to the first item in the submenu can be treated as an Fl\_Menu array itself. It is also possible to make separate submenu arrays with FL\_SUBMENU\_POINTER flags.

You should use the method functions to access structure members and not access them directly to avoid compatibility problems with future releases of FLTK.

## 30.55.2 Member Function Documentation

### 30.55.2.1 void Fl\_Menu\_Item::activate () [inline]

Allows a menu item to be picked.

Referenced by Fl\_Choice::draw().

**30.55.2.2 int Fl\_Menu\_Item::active () const [inline]**

Get whether or not the item can be picked.

Referenced by draw(), and Fl\_Choice::draw().

**30.55.2.3 int Fl\_Menu\_Item::activevisible () const [inline]**

Returns non 0 if FL\_INACTIVE and FL\_INVISIBLE are cleared, 0 otherwise.

Referenced by find\_shortcut(), pulldown(), and test\_shortcut().

**30.55.2.4 int Fl\_Menu\_Item::add (const char \* mytext, int sc, Fl\_Callback \* cb, void \* data = 0, int myflags = 0)**

Adds an item.

The text is split at '/' characters to automatically produce submenus (actually a totally unnecessary feature as you can now add submenu titles directly by setting SUBMENU in the flags):

References callback\_, flags, next(), shortcut\_, size(), text, and user\_data\_.

Referenced by Fl\_Menu\_::add().

**30.55.2.5 void Fl\_Menu\_Item::argument (long v) [inline]**

For convenience you can also define the callback as taking a long argument.

This is implemented by casting this to a Fl\_Callback and casting the long to a void\* and may not be portable to some machines.

**30.55.2.6 long Fl\_Menu\_Item::argument () const [inline]**

For convenience you can also define the callback as taking a long argument.

This is implemented by casting this to a Fl\_Callback and casting the long to a void\* and may not be portable to some machines.

**30.55.2.7 Fl\_Callback\_p Fl\_Menu\_Item::callback () const [inline]**

Each item has space for a callback function and an argument for that function.

Due to back compatibility, the [Fl\\_Menu\\_Item](#) itself is not passed to the callback, instead you have to get it by calling ((Fl\_Menu\_\*)w)->mvalue() where w is the widget argument.

**30.55.2.8 void Fl\_Menu\_Item::check () [inline]**

back compatibility only

**Deprecated**

**30.55.2.9 int Fl\_Menu\_Item::checkbox () const [inline]**

Returns true if a checkbox will be drawn next to this item.

This is true if FL\_MENU\_TOGGLE or FL\_MENU\_RADIO is set in the flags.

**30.55.2.10 int Fl\_Menu\_Item::checked () const [inline]**

back compatibility only

**Deprecated****30.55.2.11 void Fl\_Menu\_Item::clear () [inline]**

Turns the check or radio item "off" for the menu item.

Referenced by setonly().

**30.55.2.12 void Fl\_Menu\_Item::deactivate () [inline]**

Prevents a menu item from being picked.

Note that this will also cause the menu item to appear grayed-out.

Referenced by Fl\_Choice::draw().

**30.55.2.13 void Fl\_Menu\_Item::do\_callback (Fl\_Widget \* o, long arg) const [inline]**

Call the [Fl\\_Menu\\_Item](#) item's callback, and provide the [Fl\\_Widget](#) argument (and optionally override the [user\\_data\(\)](#) argument).

You must first check that [callback\(\)](#) is non-zero before calling this.

**30.55.2.14 void Fl\_Menu\_Item::do\_callback (Fl\_Widget \* o, void \* arg) const [inline]**

Call the [Fl\\_Menu\\_Item](#) item's callback, and provide the [Fl\\_Widget](#) argument (and optionally override the [user\\_data\(\)](#) argument).

You must first check that [callback\(\)](#) is non-zero before calling this.

**30.55.2.15 void Fl\_Menu\_Item::do\_callback (Fl\_Widget \* o) const [inline]**

Call the [Fl\\_Menu\\_Item](#) item's callback, and provide the [Fl\\_Widget](#) argument (and optionally override the [user\\_data\(\)](#) argument).

You must first check that [callback\(\)](#) is non-zero before calling this.

Referenced by [Fl\\_Menu\\_::picked\(\)](#).

---

**30.55.2.16 void Fl\_Menu\_Item::draw (int x, int y, int w, int h, const Fl\_Menu\_\* m, int selected = 0) const**

Draws the menu item in bounding box x,y,w,h, optionally selects the item.

References active(), Fl\_Widget::box(), Fl::box\_dx(), Fl\_Widget::color(), Fl\_Label::color, Fl\_Label::deimage, Fl\_Menu\_::down\_box(), Fl\_Label::draw(), FL\_ALIGN\_LEFT, fl\_arc(), FL\_BACKGROUND2\_COLOR, fl\_color(), FL\_DOWN\_BOX, fl\_draw\_box(), FL\_FLAT\_BOX, FL\_FOREGROUND\_COLOR, FL\_HELVETICA, fl\_line(), FL\_NORMAL\_SIZE, fl\_pie(), fl\_rectf(), FL\_SELECTION\_COLOR, FL\_UP\_BOX, flags, Fl\_Label::font, Fl\_Label::image, labelcolor\_, labelfont\_, labelsize\_, labeltype\_, Fl::scheme(), Fl\_Widget::selection\_color(), Fl\_Label::size, text, Fl\_Menu\_::textcolor(), Fl\_Menu\_::textfont(), Fl\_Menu\_::textsize(), Fl\_Label::type, value(), and Fl\_Label::value.

Referenced by Fl\_Menu\_Bar::draw(), and Fl\_Choice::draw().

**30.55.2.17 const Fl\_Menu\_Item \* Fl\_Menu\_Item::find\_shortcut (int \* ip = 0) const**

Search only the top level menu for a shortcut.

Either &x in the label or the shortcut fields are used.

References activevisible(), first(), next(), shortcut\_, test\_shortcut(), Fl::test\_shortcut(), and text.

Referenced by Fl\_Menu\_Bar::handle().

**30.55.2.18 Fl\_Menu\_Item\* Fl\_Menu\_Item::first () [inline]**

Returns the first menu item, same as next(0).

**30.55.2.19 const Fl\_Menu\_Item\* Fl\_Menu\_Item::first () const [inline]**

Returns the first menu item, same as next(0).

Referenced by find\_shortcut(), and test\_shortcut().

**30.55.2.20 void Fl\_Menu\_Item::hide () [inline]**

Hides an item in the menu.

**30.55.2.21 const char\* Fl\_Menu\_Item::label () const [inline]**

This is the title of the item.

A NULL here indicates the end of the menu (or of a submenu). A '&' in the item will print an underscore under the next letter, and if the menu is popped up that letter will be a "shortcut" to pick that item. To get a real '&' put two in a row.

Referenced by Fl\_Menu\_::find\_item(), Fl\_Menu\_::item\_pathname(), Fl\_Pixmap::label(), Fl\_RGB\_Image::label(), Fl\_Image::label(), and Fl\_Bitmap::label().

**30.55.2.22 Fl\_Color Fl\_Menu\_Item::labelcolor () const [inline]**

This color is passed to the labeltype routine, and is typically the color of the label text.

This defaults to FL\_BLACK. If this color is not black fltk will *not* use overlay bitplanes to draw the menu - this is so that images put in the menu draw correctly.

### 30.55.2.23 void Fl\_Menu\_Item::labelfont (Fl\_Font a) [inline]

Fonts are identified by small 8-bit indexes into a table.

See the enumeration list for predefined fonts. The default value is a Helvetica font. The function [Fl::set\\_font\(\)](#) can define new fonts.

### 30.55.2.24 Fl\_Font Fl\_Menu\_Item::labelfont () const [inline]

Fonts are identified by small 8-bit indexes into a table.

See the enumeration list for predefined fonts. The default value is a Helvetica font. The function [Fl::set\\_font\(\)](#) can define new fonts.

### 30.55.2.25 void Fl\_Menu\_Item::labelsize (Fl\_Fontsize a) [inline]

Sets the label font pixel size/height.

### 30.55.2.26 Fl\_Fontsize Fl\_Menu\_Item::labelsize () const [inline]

Gets or sets the label font pixel size/height.

Gets the label font pixel size/height.

### 30.55.2.27 void Fl\_Menu\_Item::labeltype (Fl\_Labeltype a) [inline]

A labeltype identifies a routine that draws the label of the widget.

This can be used for special effects such as emboss, or to use the [label\(\)](#) pointer as another form of data such as a bitmap. The value FL\_NORMAL\_LABEL prints the label as text.

### 30.55.2.28 Fl\_Labeltype Fl\_Menu\_Item::labeltype () const [inline]

A labeltype identifies a routine that draws the label of the widget.

This can be used for special effects such as emboss, or to use the [label\(\)](#) pointer as another form of data such as a bitmap. The value FL\_NORMAL\_LABEL prints the label as text.

### 30.55.2.29 int Fl\_Menu\_Item::measure (int \* hp, const Fl\_Menu\_ \* m) const

Measures width of label, including effect of & characters.

Optionally, can get height if hp is not NULL.

References Fl\_Label::color, Fl\_Label::deimage, FL\_FOREGROUND\_COLOR, FL\_HELVETICA, FL\_NORMAL\_SIZE, flags, Fl\_Label::font, Fl\_Label::image, labelfont\_, labelsize\_, labeltype\_, Fl\_Label::measure(), Fl\_Label::size, text, Fl\_Menu\_::textfont(), Fl\_Menu\_::textsize(), Fl\_Label::type, and Fl\_Label::value.

Referenced by Fl\_Menu\_Bar::draw().

**30.55.2.30 Fl\_Menu\_Item\* Fl\_Menu\_Item::next (int *i* = 1) [inline]**

Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items. There are two calls so that you can advance through const and non-const data.

**30.55.2.31 const Fl\_Menu\_Item \* Fl\_Menu\_Item::next (int *n* = 1) const**

Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items. There are two calls so that you can advance through const and non-const data.

References flags, text, and visible().

Referenced by add(), Fl\_Menu\_Bar::draw(), find\_shortcut(), Fl\_Menu\_::remove(), and test\_shortcut().

**30.55.2.32 const Fl\_Menu\_Item \* Fl\_Menu\_Item::popup (int *X*, int *Y*, const char \* *title* = 0, const Fl\_Menu\_Item \* *picked* = 0, const Fl\_Menu\_ \* *but* = 0) const**

This method is called by widgets that want to display menus.

The menu stays up until the user picks an item or dismisses it. The selected item (or NULL if none) is returned. *This does not do the callbacks or change the state of check or radio items.*

*X,Y* is the position of the mouse cursor, relative to the window that got the most recent event (usually you can pass Fl::event\_x() and Fl::event\_y() unchanged here).

*title* is a character string title for the menu. If non-zero a small box appears above the menu with the title in it.

The menu is positioned so the cursor is centered over the item picked. This will work even if picked is in a submenu. If picked is zero or not in the menu item table the menu is positioned with the cursor in the top-left corner.

*button* is a pointer to an Fl\_Menu\_ from which the color and boxtypes for the menu are pulled. If NULL then defaults are used.

References pulldown(), and text.

Referenced by Fl\_Menu\_Button::popup().

**30.55.2.33 const Fl\_Menu\_Item \* Fl\_Menu\_Item::pulldown (int *X*, int *Y*, int *W*, int *H*, const Fl\_Menu\_Item \* *initial\_item* = 0, const Fl\_Menu\_ \* *pbutton* = 0, const Fl\_Menu\_Item \* *t* = 0, int *menubar* = 0) const**

Pulldown() is similar to [popup\(\)](#), but a rectangle is provided to position the menu.

The menu is made at least *W* wide, and the picked item is centered over the rectangle (like Fl\_Choice uses). If picked is zero or not found, the menu is aligned just below the rectangle (like a pulldown menu).

The title and menubar arguments are used internally by the Fl\_Menu\_Bar widget.

References activevisible(), Fl\_Group::current(), Fl::event\_x(), Fl::event\_x\_root(), Fl::event\_y(), Fl::event\_y\_root(), FL\_DRAG, flags, Fl::grab(), Fl::release(), submenu(), user\_data\_, Fl::wait(), and Fl\_Widget::window().

Referenced by Fl\_Menu\_Bar::handle(), Fl\_Choice::handle(), Fl\_Menu\_Button::popup(), and popup().

**30.55.2.34 int Fl\_Menu\_Item::radio () const [inline]**

Returns true if this item is a radio item.

When a radio button is selected all "adjacent" radio buttons are turned off. A set of radio items is delimited by an item that has [radio\(\)](#) false, or by an item with FL\_MENU\_DIVIDER turned on.

Referenced by [Fl\\_Menu\\_::picked\(\)](#), and [setonly\(\)](#).

**30.55.2.35 void Fl\_Menu\_Item::set () [inline]**

Turns the check or radio item "on" for the menu item.

Note that this does not turn off any adjacent radio items like [set\\_only\(\)](#) does.

**30.55.2.36 void Fl\_Menu\_Item::setonly ()**

Turns the radio item "on" for the menu item and turns off adjacent radio items set.

References [clear\(\)](#), [flags\(\)](#), [radio\(\)](#), and [text\(\)](#).

**30.55.2.37 void Fl\_Menu\_Item::shortcut (int s) [inline]**

Sets exactly what key combination will trigger the menu item.

The value is a logical 'or' of a key and a set of shift flags, for instance FL\_ALT+'a' or FL\_ALT+FL\_F10 or just 'a'. A value of zero disables the shortcut.

The key can be any value returned by [Fl::event\\_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event\\_state\(\)](#). If the bit is on that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

**30.55.2.38 int Fl\_Menu\_Item::shortcut () const [inline]**

Gets what key combination shortcut will trigger the menu item.

**30.55.2.39 void Fl\_Menu\_Item::show () [inline]**

Makes an item visible in the menu.

**30.55.2.40 int Fl\_Menu\_Item::submenu () const [inline]**

Returns true if either FL\_SUBMENU or FL\_SUBMENU\_POINTER is on in the flags.

FL\_SUBMENU indicates an embedded submenu that goes from the next item through the next one with a NULL [label\(\)](#). FL\_SUBMENU\_POINTER indicates that [user\\_data\(\)](#) is a pointer to another menu array.

Referenced by [Fl\\_Menu\\_Bar::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [Fl\\_Menu\\_::item\\_pathname\(\)](#), [pulldown\(\)](#), and [test\\_shortcut\(\)](#).

**30.55.2.41 const Fl\_Menu\_Item \* Fl\_Menu\_Item::test\_shortcut () const**

This is designed to be called by a widgets handle() method in response to a FL\_SHORTCUT event.

If the current event matches one of the items shortcut, that item is returned. If the keystroke does not match any shortcuts then NULL is returned. This only matches the [shortcut\(\)](#) fields, not the letters in the title preceeded by '

References activevisible(), first(), flags, next(), shortcut\_, submenu(), test\_shortcut(), Fl::test\_shortcut(), text, and user\_data\_.

Referenced by [find\\_shortcut\(\)](#), [Fl\\_Choice::handle\(\)](#), and [test\\_shortcut\(\)](#).

**30.55.2.42 void Fl\_Menu\_Item::uncheck () [inline]**

back compatibility only

**Deprecated**

**30.55.2.43 int Fl\_Menu\_Item::value () const [inline]**

Returns the current value of the check or radio item.

Referenced by [draw\(\)](#), and [Fl\\_Menu\\_::picked\(\)](#).

**30.55.2.44 int Fl\_Menu\_Item::visible () const [inline]**

Gets the visibility of an item.

Referenced by [next\(\)](#).

The documentation for this struct was generated from the following files:


- [Fl\\_Menu\\_Item.H](#)
- [Fl\\_Menu.cxx](#)
- [Fl\\_Menu\\_.cxx](#)
- [Fl\\_Menu\\_add.cxx](#)

## 30.56 Fl\_Menu\_Window Class Reference

The [Fl\\_Menu\\_Window](#) widget is a window type used for menus.

```
#include <Fl_Menu_Window.h>
```

Inheritance diagram for [Fl\\_Menu\\_Window](#)::

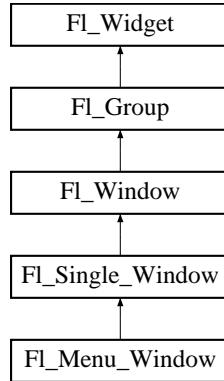

### Public Member Functions

- void [show \(\)](#)  
*Put the window on the screen.*
- void [erase \(\)](#)  
*Erases the window, does nothing if HAVE\_OVERLAY is not defined config.h.*
- void [flush \(\)](#)  
*Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).*
- void [hide \(\)](#)  
*Remove the window from the screen.*
- int [overlay \(\)](#)  
*Tells if hardware overlay mode is set.*
- void [set\\_overlay \(\)](#)  
*Tells FLTK to use hardware overlay planes if they are available.*
- void [clear\\_overlay \(\)](#)  
*Tells FLTK to use normal drawing planes instead of overlay planes.*
- [~Fl\\_Menu\\_Window \(\)](#)  
*Destroys the window and all of its children.*
- [Fl\\_Menu\\_Window \(int W, int H, const char \\*l=0\)](#)  
*Creates a new [Fl\\_Menu\\_Window](#) widget using the given size, and label string.*
- [Fl\\_Menu\\_Window \(int X, int Y, int W, int H, const char \\*l=0\)](#)

*Creates a new [Fl\\_Menu\\_Window](#) widget using the given position, size, and label string.*

### 30.56.1 Detailed Description

The [Fl\\_Menu\\_Window](#) widget is a window type used for menus.

By default the window is drawn in the hardware overlay planes if they are available so that the menu don't force the rest of the window to redraw.

### 30.56.2 Constructor & Destructor Documentation

#### 30.56.2.1 [Fl\\_Menu\\_Window::~Fl\\_Menu\\_Window \(\)](#)

Destroys the window and all of its children.

References [hide\(\)](#).

#### 30.56.2.2 [Fl\\_Menu\\_Window::Fl\\_Menu\\_Window \(int W, int H, const char \\*l = 0\) \[inline\]](#)

Creates a new [Fl\\_Menu\\_Window](#) widget using the given size, and label string.

References [Fl\\_Widget::image\(\)](#).

#### 30.56.2.3 [Fl\\_Menu\\_Window::Fl\\_Menu\\_Window \(int X, int Y, int W, int H, const char \\*l = 0\) \[inline\]](#)

Creates a new [Fl\\_Menu\\_Window](#) widget using the given position, size, and label string.

References [Fl\\_Widget::image\(\)](#).

### 30.56.3 Member Function Documentation

#### 30.56.3.1 [void Fl\\_Menu\\_Window::clear\\_overlay \(\) \[inline\]](#)

Tells FLTK to use normal drawing planes instead of overlay planes.

This is usually necessary if your menu contains multi-color pixmaps.

References [Fl\\_Widget::set\\_flag\(\)](#).

#### 30.56.3.2 [void Fl\\_Menu\\_Window::flush \(\) \[virtual\]](#)

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

Reimplemented from [Fl\\_Single\\_Window](#).

References [Fl::cairo\\_make\\_current\(\)](#), [Fl\\_Window::current\\_](#), [Fl\\_Window::draw\(\)](#), [fl\\_clip\\_region\(\)](#), and [overlay\(\)](#).

#### 30.56.3.3 [void Fl\\_Menu\\_Window::hide \(\) \[virtual\]](#)

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl\\_Window](#).

References [erase\(\)](#).

Referenced by [~Fl\\_Menu\\_Window\(\)](#).

#### **30.56.3.4 void Fl\_Menu\_Window::set\_overlay () [inline]**

Tells FLTK to use hardware overlay planes if they are available.

References [Fl\\_Widget::clear\\_flag\(\)](#).

#### **30.56.3.5 void Fl\_Menu\_Window::show () [virtual]**

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl\\_Single\\_Window](#).

References [overlay\(\)](#), and [Fl\\_Window::shown\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Menu\\_Window.H](#)
- [Fl\\_Menu\\_Window.cxx](#)

## 30.57 Fl\_Multi\_Browser Class Reference

The [Fl\\_Multi\\_Browser](#) class is a subclass of [Fl\\_Browser](#) which lets the user select any set of the lines.

```
#include <Fl_Multi_Browser.h>
```

Inheritance diagram for Fl\_Multi\_Browser::

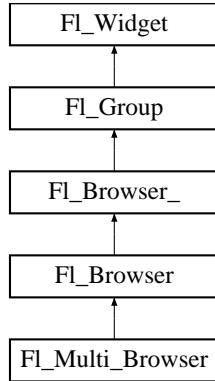

### Public Member Functions

- [Fl\\_Multi\\_Browser](#) (int X, int Y, int W, int H, const char \*L=0)

*Creates a new [Fl\\_Multi\\_Browser](#) widget using the given position, size, and label string.*

#### 30.57.1 Detailed Description

The [Fl\\_Multi\\_Browser](#) class is a subclass of [Fl\\_Browser](#) which lets the user select any set of the lines.

The user interface is Macintosh style: clicking an item turns off all the others and selects that one, dragging selects all the items the mouse moves over, and shift + click toggles the items. This is different than how forms did it. Normally the callback is done when the user releases the mouse, but you can change this with [when\(\)](#).

See [Fl\\_Browser](#) for methods to add and remove lines from the browser.

#### 30.57.2 Constructor & Destructor Documentation

##### 30.57.2.1 [Fl\\_Multi\\_Browser::Fl\\_Multi\\_Browser](#) (int X, int Y, int W, int H, const char \* L = 0) [inline]

*Creates a new [Fl\\_Multi\\_Browser](#) widget using the given position, size, and label string.*

The default boxtyle is [FL\\_DOWN\\_BOX](#). The constructor specializes [Fl\\_Browser\(\)](#) by setting the type to [FL\\_MULTI\\_BROWSER](#). The destructor destroys the widget and frees all memory that has been allocated.

References [FL\\_MULTI\\_BROWSER](#), and [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl\\_Multi\\_Browser.H](#)


## 30.58 Fl\_Multiline\_Input Class Reference

This input field displays '

' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys.

```
#include <Fl_Multiline_Input.H>
```

Inheritance diagram for Fl\_Multiline\_Input::



### Public Member Functions

- [Fl\\_Multiline\\_Input](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new Fl\_Multiline\_Input widget using the given position, size, and label string.*

### 30.58.1 Detailed Description

This input field displays '

' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys.

This is for editing multiline text.

This is far from the nirvana of text editors, and is probably only good for small bits of text, 10 lines at most. I think FLTK can be used to write a powerful text editor, but it is not going to be a built-in feature. Powerful text editors in a toolkit are a big source of bloat.

### 30.58.2 Constructor & Destructor Documentation

#### 30.58.2.1 [Fl\\_Multiline\\_Input::Fl\\_Multiline\\_Input](#) (int X, int Y, int W, int H, const char \*l = 0) [inline]

Creates a new Fl\_Multiline\_Input widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

Inherited destructor destroys the widget and any value associated with it.

References Fl\_Widget::type().

The documentation for this class was generated from the following file:


- [Fl\\_Multiline\\_Input.H](#)

## 30.59 Fl\_Multiline\_Output Class Reference

This widget is a subclass of [Fl\\_Output](#) that displays multiple lines of text.

```
#include <Fl_Multiline_Output.H>
```

Inheritance diagram for [Fl\\_Multiline\\_Output](#):

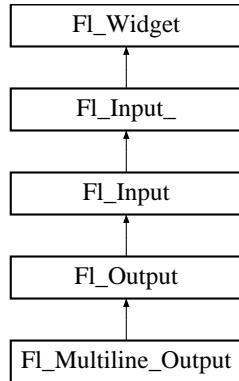

### Public Member Functions

- [Fl\\_Multiline\\_Output](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Multiline\\_Output](#) widget using the given position, size, and label string.*

### 30.59.1 Detailed Description

This widget is a subclass of [Fl\\_Output](#) that displays multiple lines of text.

It also displays tab characters as whitespace to the next column.

### 30.59.2 Constructor & Destructor Documentation

#### 30.59.2.1 [Fl\\_Multiline\\_Output::Fl\\_Multiline\\_Output](#) (int X, int Y, int W, int H, const char \*l = 0) [inline]

Creates a new [Fl\\_Multiline\\_Output](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`

Inherited destructor destroys the widget and any value associated with it.

References `Fl_Widget::type()`.

The documentation for this class was generated from the following file:


- [Fl\\_Multiline\\_Output.H](#)

## 30.60 Fl\_Output Class Reference

This widget displays a piece of text.

```
#include <Fl_Output.h>
```

Inheritance diagram for Fl\_Output::

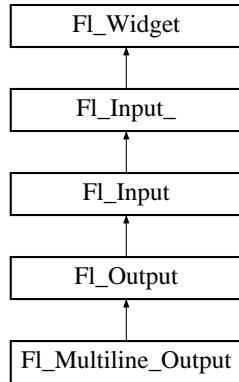

### Public Member Functions

- [Fl\\_Output](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Output](#) widget using the given position, size, and label string.*

### 30.60.1 Detailed Description

This widget displays a piece of text.

When you set the [value\(\)](#) , [Fl\\_Output](#) does a strcpy() to it's own storage, which is useful for program-generated values. The user may select portions of the text using the mouse and paste the contents into other fields or programs.



Figure 30.21: Fl\_Output

There is a single subclass, [Fl\\_Multiline\\_Output](#), which allows you to display multiple lines of text.

The text may contain any characters except \0, and will correctly display anything, using ^X notation for unprintable control characters and \nnn notation for unprintable characters with the high bit set. It assumes the font can draw any characters in the ISO-Latin1 character set.

### 30.60.2 Constructor & Destructor Documentation

#### 30.60.2.1 `Fl_Output::Fl_Output (int X, int Y, int W, int H, const char *l = 0) [inline]`

Creates a new [Fl\\_Output](#) widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

Inherited destrucor destroys the widget and any value associated with it.

References [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl\\_Output.H](#)

## 30.61 Fl\_Overlay\_Window Class Reference

This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image.

```
#include <Fl_Overlay_Window.h>
```

Inheritance diagram for Fl\_Overlay\_Window::

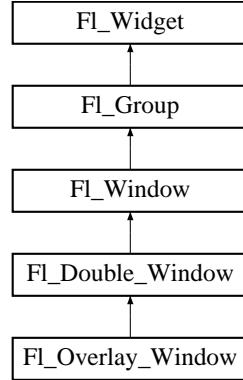

### Public Member Functions

- void [show \(\)](#)  
*Put the window on the screen.*
- void [flush \(\)](#)  
*Forces the window to be redrawn.*
- void [hide \(\)](#)  
*Remove the window from the screen.*
- void [resize \(int, int, int, int\)](#)  
*Changes the size and position of the window.*
- [~Fl\\_Overlay\\_Window \(\)](#)  
*Destroys the window and all child widgets.*
- int [can\\_do\\_overlay \(\)](#)
- void [redraw\\_overlay \(\)](#)  
*Call this to indicate that the overlay data has changed and needs to be redrawn.*
- [Fl\\_Overlay\\_Window \(int W, int H, const char \\*l=0\)](#)  
*Creates a new [Fl\\_Overlay\\_Window](#) widget using the given position, size, and label (title) string.*
- [Fl\\_Overlay\\_Window \(int X, int Y, int W, int H, const char \\*l=0\)](#)  
*See [Fl\\_Overlay\\_Window::Fl\\_Overlay\\_Window\(int W, int H, const char \\*l=0\)](#).*
- void [show \(int a, char \\*\\*b\)](#)  
*See virtual void [Fl\\_Window::show\(\)](#).*

## Friends

- class [\\_Fl\\_Overlay](#)

### 30.61.1 Detailed Description

This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image.

The overlay is designed to be a rapidly-changing but simple graphic such as a mouse selection box. [Fl\\_Overlay\\_Window](#) uses the overlay planes provided by your graphics hardware if they are available.

If no hardware support is found the overlay is simulated by drawing directly into the on-screen copy of the double-buffered window, and "erased" by copying the backbuffer over it again. This means the overlay will blink if you change the image in the window.

### 30.61.2 Constructor & Destructor Documentation

#### 30.61.2.1 `Fl_Overlay_Window::Fl_Overlay_Window (int W, int H, const char * l = 0)` [inline]

Creates a new [Fl\\_Overlay\\_Window](#) widget using the given position, size, and label (title) string.

If the positions (x,y) are not given, then the window manager will choose them.

References [Fl\\_Widget::image\(\)](#).

### 30.61.3 Member Function Documentation

#### 30.61.3.1 `void Fl_Overlay_Window::hide () [virtual]`

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl\\_Double\\_Window](#).

Referenced by [~Fl\\_Overlay\\_Window\(\)](#).

#### 30.61.3.2 `void Fl_Overlay_Window::redraw_overlay ()`

Call this to indicate that the overlay data has changed and needs to be redrawn.

The overlay will be clear until the first time this is called, so if you want an initial display you must call this after calling [show\(\)](#).

References [Fl\\_Widget::clear\\_damage\(\)](#), and [Fl\\_Widget::damage\(\)](#).

#### 30.61.3.3 `void Fl_Overlay_Window::resize (int, int, int, int) [virtual]`

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl\\_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl\\_Widget](#) methods `size(x,y)` and `position(w,h)`, which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl\\_Double\\_Window](#).

References `Fl_Widget::h()`, `Fl_Window::resize()`, and `Fl_Widget::w()`.

#### 30.61.3.4 void Fl\_Overlay\_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call `show()` at any time, even if the window is already up. It also means that `show()` serves the purpose of `raise()` in other toolkits.

Reimplemented from [Fl\\_Double\\_Window](#).

References `Fl_Window::show()`.

The documentation for this class was generated from the following files:


- [Fl\\_Overlay\\_Window.H](#)
- [Fl\\_Overlay\\_Window.cxx](#)

## 30.62 Fl\_Pack Class Reference

This widget was designed to add the functionality of compressing and aligning widgets.

```
#include <Fl_Pack.h>
```

Inheritance diagram for Fl\_Pack::



### Public Types

- enum { **VERTICAL** = 0, **HORIZONTAL** = 1 }

### Public Member Functions

- void [draw\(\)](#)  
*Draw the widget.*
- [Fl\\_Pack](#) (int x, int y, int w, int h, const char \*l=0)  
*Creates a new [Fl\\_Pack](#) widget using the given position, size, and label string.*
- int [spacing\(\) const](#)  
*Gets the number of extra pixels of blank space that are added between the children.*
- void [spacing\(int i\)](#)  
*Sets the number of extra pixels of blank space that are added between the children.*
- uchar [horizontal\(\) const](#)  
*Same as [Fl\\_Group::type\(\)](#).*

### 30.62.1 Detailed Description

This widget was designed to add the functionality of compressing and aligning widgets.

If [type\(\)](#) is `Fl_Pack::HORIZONTAL` all the children are resized to the height of the [Fl\\_Pack](#), and are moved next to each other horizontally. If [type\(\)](#) is not `Fl_Pack::HORIZONTAL` then the children are resized to the width and are stacked below each other. Then the [Fl\\_Pack](#) resizes itself to surround the child widgets.

This widget is needed for the [Fl\\_Tabs](#). In addition you may want to put the [Fl\\_Pack](#) inside an [Fl\\_Scroll](#).

The resizable for [Fl\\_Pack](#) is set to NULL by default.

See also: [Fl\\_Group::resizable\(\)](#)

### 30.62.2 Constructor & Destructor Documentation

#### 30.62.2.1 Fl\_Pack::Fl\_Pack (int X, int Y, int W, int H, const char \* l = 0)

Creates a new [Fl\\_Pack](#) widget using the given position, size, and label string.

The default boxtyle is FL\_NO\_BOX.

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl\\_Pack](#) and all of its children can be automatic (local) variables, but you must declare the [Fl\\_Pack](#) *first*, so that it is destroyed last.

References [Fl\\_Group::resizable\(\)](#).

### 30.62.3 Member Function Documentation

#### 30.62.3.1 void Fl\_Pack::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Group::array\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [Fl\\_Group::child\(\)](#), [Fl\\_Group::children\(\)](#), [Fl\\_Widget::clear\\_damage\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Group::draw\\_child\(\)](#), [Fl\\_Widget::draw\\_label\(\)](#), [Fl\\_Group::draw\\_outside\\_label\(\)](#), [fl\\_color\(\)](#), [fl\\_rectf\(\)](#), [Fl\\_Widget::h\(\)](#), [horizontal\(\)](#), [Fl\\_Group::resizable\(\)](#), [Fl\\_Group::resize\(\)](#), [Fl\\_Widget::resize\(\)](#), [Fl\\_Group::update\\_child\(\)](#), [Fl\\_Widget::visible\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Pack.H](#)
- [Fl\\_Pack.cxx](#)

## 30.63 Fl\_Pixmap Class Reference

The [Fl\\_Pixmap](#) class supports caching and drawing of colormap ( pixmap) images, including transparency.

```
#include <Fl_Pixmap.h>
```

Inheritance diagram for [Fl\\_Pixmap](#)::

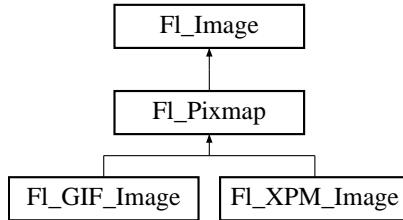

### Public Member Functions

- [Fl\\_Pixmap \(char \\*const \\*D\)](#)

*The constructors create a new pixmap from the specified XPM data.*

- [Fl\\_Pixmap \(uchar \\*const \\*D\)](#)

*The constructors create a new pixmap from the specified XPM data.*

- [Fl\\_Pixmap \(const char \\*const \\*D\)](#)

*The constructors create a new pixmap from the specified XPM data.*

- [Fl\\_Pixmap \(const uchar \\*const \\*D\)](#)

*The constructors create a new pixmap from the specified XPM data.*

- virtual [~Fl\\_Pixmap \(\)](#)

*The destructor free all memory and server resources that are used by the pixmap.*

- virtual [Fl\\_Image \\* copy \(int W, int H\)](#)

*The [copy\(\)](#) method creates a copy of the specified image.*

- [Fl\\_Image \\* copy \(\)](#)

*The [copy\(\)](#) method creates a copy of the specified image.*

- virtual void [color\\_average \(Fl\\_Color c, float i\)](#)

*The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value c.*

- virtual void [desaturate \(\)](#)

*The [desaturate\(\)](#) method converts an image to grayscale.*

- virtual void [draw \(int X, int Y, int W, int H, int cx=0, int cy=0\)](#)

*The [draw\(\)](#) methods draw the image.*

- void [draw \(int X, int Y\)](#)

*The [draw\(\)](#) methods draw the image.*

- virtual void **label (Fl\_Widget \*w)**

*The **label()** methods are an obsolete way to set the image attribute of a widget or menu item.*

- virtual void **label (Fl\_Menu\_Item \*m)**

*The **label()** methods are an obsolete way to set the image attribute of a widget or menu item.*

- virtual void **uncache ()**

*If the image has been cached for display, delete the cache data.*

## Public Attributes

- int **alloc\_data**
- unsigned **id**
- unsigned **mask**

## Protected Member Functions

- void **measure ()**

### 30.63.1 Detailed Description

The **Fl\_Pixmap** class supports caching and drawing of colormap ( pixmap) images, including transparency.

### 30.63.2 Constructor & Destructor Documentation

#### 30.63.2.1 **Fl\_Pixmap::Fl\_Pixmap (char \*const \*D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

Referenced by **copy()**.

#### 30.63.2.2 **Fl\_Pixmap::Fl\_Pixmap (uchar \*const \*D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

#### 30.63.2.3 **Fl\_Pixmap::Fl\_Pixmap (const char \*const \*D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

#### 30.63.2.4 **Fl\_Pixmap::Fl\_Pixmap (const uchar \*const \*D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

### 30.63.3 Member Function Documentation

#### 30.63.3.1 void Fl\_Pixmap::color\_average (Fl\_Color c, float i) [virtual]

The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value c.

The i argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::data\(\)](#), [Fl::get\\_color\(\)](#), and [uncache\(\)](#).

#### 30.63.3.2 Fl\_Image\* Fl\_Pixmap::copy () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [copy\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [copy\(\)](#).

#### 30.63.3.3 Fl\_Image \* Fl\_Pixmap::copy (int W, int H) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [alloc\\_data](#), [copy\\_data\(\)](#), [Fl\\_Image::data\(\)](#), [Fl\\_Pixmap\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

#### 30.63.3.4 void Fl\_Pixmap::desaturate () [virtual]

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::data\(\)](#), and [uncache\(\)](#).

#### 30.63.3.5 void Fl\_Pixmap::draw (int X, int Y) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl\\_Image](#).

References [draw\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [draw\(\)](#).

**30.63.3.6 void Fl\_Pixmap::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]**

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::data\(\)](#), [Fl\\_Image::draw\\_empty\(\)](#), [fl\\_clip\\_box\(\)](#), [fl\\_restore\\_clip\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [Fl\\_FormsPixmap::draw\(\)](#).

**30.63.3.7 void Fl\_Pixmap::label (Fl\_Menu\_Item \* m) [virtual]**

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented from [Fl\\_Image](#).

References [\\_FL\\_IMAGE\\_LABEL](#), [Fl\\_Menu\\_Item::label\(\)](#), and [Fl::set\\_labeltype\(\)](#).

**30.63.3.8 void Fl\_Pixmap::label (Fl\_Widget \* widget) [virtual]**

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Widget::image\(\)](#).

**30.63.3.9 void Fl\_Pixmap::uncache () [virtual]**

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl\\_Image](#).

Referenced by [color\\_average\(\)](#), [desaturate\(\)](#), [Fl::reload\\_scheme\(\)](#), and [~Fl\\_Pixmap\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Pixmap.H](#)
- [Fl\\_Pixmap.cxx](#)

## 30.64 Fl\_PNG\_Image Class Reference

The [Fl\\_PNG\\_Image](#) class supports loading, caching, and drawing of Portable Network Graphics (PNG) image files.

```
#include <Fl_PNG_Image.h>
```

Inheritance diagram for Fl\_PNG\_Image::



### Public Member Functions

- [Fl\\_PNG\\_Image](#) (const char \*filename)

*The constructor loads the named PNG image from the given png filename.*

#### 30.64.1 Detailed Description

The [Fl\\_PNG\\_Image](#) class supports loading, caching, and drawing of Portable Network Graphics (PNG) image files.

The class loads colormapped and full-color images and handles color- and alpha-based transparency.

#### 30.64.2 Constructor & Destructor Documentation

##### 30.64.2.1 Fl\_PNG\_Image::Fl\_PNG\_Image (const char \* *png*)

The constructor loads the named PNG image from the given png filename.

The destructor free all memory and server resources that are used by the image.

References Fl\_Image::d(), Fl\_Image::h(), Fl\_Image::w(), and Fl::warning.

The documentation for this class was generated from the following files:


- [Fl\\_PNG\\_Image.H](#)
- [Fl\\_PNG\\_Image.cxx](#)

## 30.65 Fl\_PNM\_Image Class Reference

The [Fl\\_PNM\\_Image](#) class supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files.

```
#include <Fl_PNM_Image.h>
```

Inheritance diagram for Fl\_PNM\_Image::



### Public Member Functions

- [Fl\\_PNM\\_Image](#) (const char \*filename)

*The constructor loads the named PNM image.*

#### 30.65.1 Detailed Description

The [Fl\\_PNM\\_Image](#) class supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files.

The class loads bitmap, grayscale, and full-color images in both ASCII and binary formats.

#### 30.65.2 Constructor & Destructor Documentation

##### 30.65.2.1 Fl\_PNM\_Image::Fl\_PNM\_Image (const char \* *name*)

The constructor loads the named PNM image.

The inherited destructor free all memory and server resources that are used by the image.

References Fl\_Image::d(), Fl::error, Fl\_Image::h(), and Fl\_Image::w().

The documentation for this class was generated from the following files:


- [Fl\\_PNM\\_Image.H](#)
- [Fl\\_PNM\\_Image.cxx](#)

## 30.66 Fl\_Positioner Class Reference

This class is provided for Forms compatibility.

```
#include <Fl_Positioner.H>
```

Inheritance diagram for Fl\_Positioner::



### Public Member Functions

- int **handle** (int)  
*Handles the specified event.*
- **Fl\_Positioner** (int x, int y, int w, int h, const char \*l=0)  
*Creates a new [Fl\\_Positioner](#) widget using the given position, size, and label string.*
- double **xvalue** () const  
*Gets the X axis coordinate.*
- double **yvalue** () const  
*Gets the Y axis coordinate.*
- int **xvalue** (double)  
*Sets the X axis coordinate.*
- int **yvalue** (double)  
*Sets the Y axis coordinate.*
- int **value** (double, double)  
*Returns the current position in x and y.*
- void **xbounds** (double, double)  
*Sets the X axis bounds.*
- double **xminimum** () const  
*Gets the X axis minimum.*
- void **xminimum** (double a)  
*Same as xbounds(a, [xmaximum\(\)](#)).*
- double **xmaximum** () const  
*Gets the X axis maximum.*
- void **xmaximum** (double a)

*Same as xbounds(xminimum(), a).*

- void **ybounds** (double, double)  
*Sets the Y axis bounds.*
- double **yminimum** () const  
*Gets the Y axis minimum.*
- void **yminimum** (double a)  
*Same as ybounds(a, ymaximum()).*
- double **ymaximum** () const  
*Gets the Y axis maximum.*
- void **ymaximum** (double a)  
*Same as ybounds(ymininimum(), a).*
- void **xstep** (double a)  
*Sets the stepping value for the X axis.*
- void **ystep** (double a)  
*Sets the stepping value for the Y axis.*

## Protected Member Functions

- void **draw** (int, int, int, int)
- int **handle** (int, int, int, int, int)
- void **draw** ()  
*Draw the widget.*

### 30.66.1 Detailed Description

This class is provided for Forms compatibility.

It provides 2D input. It would be useful if this could be put atop another widget so that the crosshairs are on top, but this is not implemented. The color of the crosshairs is [selection\\_color\(\)](#).



Figure 30.22: Fl\_Positioner

## 30.66.2 Constructor & Destructor Documentation

### 30.66.2.1 `Fl_Positioner::Fl_Positioner (int X, int Y, int W, int H, const char *l = 0)`

Creates a new `Fl_Positioner` widget using the given position, size, and label string.

Creates a new `Fl_Positioner` widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

References `Fl_Widget::align()`, `Fl_Widget::box()`, `FL_ALIGN_BOTTOM`, `FL_DOWN_BOX`, `FL_WHEN_CHANGED`, `Fl_Widget::selection_color()`, and `Fl_Widget::when()`.

## 30.66.3 Member Function Documentation

### 30.66.3.1 `void Fl_Positioner::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::draw_label()`, `Fl_Widget::h()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.66.3.2 `int Fl_Positioner::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited handle() method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

$\leftarrow$  `event` the kind of event received

#### Return values:

`0` if the event was not used or understood

`1` if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from `Fl_Widget`.

References `Fl_Widget::h()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

**30.66.3.3 int Fl\_Positioner::value (double X, double Y)**

Returns the current position in x and y.

References Fl\_Widget::clear\_changed(), and Fl\_Widget::redraw().

Referenced by xvalue(), and yvalue().

**30.66.3.4 void Fl\_Positioner::xbounds (double a, double b)**

Sets the X axis bounds.

References Fl\_Widget::redraw().

**30.66.3.5 void Fl\_Positioner::xstep (double a) [inline]**

Sets the stepping value for the X axis.

**30.66.3.6 int Fl\_Positioner::xvalue (double X)**

Sets the X axis coordinate.

References value().

**30.66.3.7 double Fl\_Positioner::xvalue () const [inline]**

Gets the X axis coordinate.

**30.66.3.8 void Fl\_Positioner::ybounds (double a, double b)**

Sets the Y axis bounds.

References Fl\_Widget::redraw().

**30.66.3.9 void Fl\_Positioner::ystep (double a) [inline]**

Sets the stepping value for the Y axis.

**30.66.3.10 int Fl\_Positioner::yvalue (double Y)**

Sets the Y axis coordinate.

References value().

**30.66.3.11 double Fl\_Positioner::yvalue () const [inline]**

Gets the Y axis coordinate.

The documentation for this class was generated from the following files:

- [Fl\\_Positioner.H](#)
- [Fl\\_Positioner.cxx](#)

## 30.67 Fl\_Preferences Class Reference

[Fl\\_Preferences](#) provides methods to store user settings between application starts.

```
#include <Fl_Preferences.H>
```

### Classes

- struct [Entry](#)

*An entry associates a preference name to its corresponding value.*

- class [Name](#)

*'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.*

- class [Node](#)

- class [RootNode](#)

### Public Types

- enum [Root](#) { [SYSTEM](#) = 0, [USER](#) }

*Define the scope of the preferences.*

### Public Member Functions

- [Fl\\_Preferences \(Root root, const char \\*vendor, const char \\*application\)](#)

*The constructor creates a group that manages name/value pairs and child groups.*

- [Fl\\_Preferences \(const char \\*path, const char \\*vendor, const char \\*application\)](#)

*This constructor is used to create or read a preferences file at an arbitrary position in the file system.*

- [Fl\\_Preferences \(Fl\\_Preferences &parent, const char \\*group\)](#)

*This constructor generates a new group of preference entries inside the group or file parent.*

- [Fl\\_Preferences \(Fl\\_Preferences \\*, const char \\*group\)](#)

*create a Preferences node in relation to a parent node for reading and writing*

*– parent: base name for group*

*– group: group name (can contain '/' separated group names) example: [Fl\\_Preferences colors\( base, "setup/colors" \);](#)*

- [~Fl\\_Preferences \(\)](#)

*The destructor removes allocated resources.*

- int [groups \(\)](#)

*Returns the number of groups that are contained within a group.*

- const char \* [group \(int num\\_group\)](#)

*Returns the name of the Nth group.*

- char **groupExists** (const char \*key)  
*Returns non-zero if a group with this name exists.*
- char **deleteGroup** (const char \*group)  
*Deletes a group.*
- int **entries** ()  
*Returns the number of entries (name/value pairs) in a group.*
- const char \* **entry** (int index)  
*Returns the name of an entry.*
- char **entryExists** (const char \*key)  
*Returns non-zero if an entry with this name exists.*
- char **deleteEntry** (const char \*entry)  
*Removes a single entry (name/value pair).*
- char **set** (const char \*entry, int value)  
*Sets an entry (name/value pair).*
- char **set** (const char \*entry, float value)  
*Sets an entry (name/value pair).*
- char **set** (const char \*entry, float value, int precision)  
*Sets an entry (name/value pair).*
- char **set** (const char \*entry, double value)  
*Sets an entry (name/value pair).*
- char **set** (const char \*entry, double value, int precision)  
*Sets an entry (name/value pair).*
- char **set** (const char \*entry, const char \*value)  
*Sets an entry (name/value pair).*
- char **set** (const char \*entry, const void \*value, int size)  
*Sets an entry (name/value pair).*
- char **get** (const char \*entry, int &value, int defaultValue)  
*Reads an entry from the group.*
- char **get** (const char \*entry, float &value, float defaultValue)  
*Reads an entry from the group.*
- char **get** (const char \*entry, double &value, double defaultValue)  
*Reads an entry from the group.*
- char **get** (const char \*entry, char \*&value, const char \*defaultValue)

*Reads an entry from the group.*

- char `get` (const char \*entry, char \*value, const char \*defaultValue, int maxSize)

*Reads an entry from the group.*

- char `get` (const char \*entry, void \*&value, const void \*defaultValue, int defaultSize)

*Reads an entry from the group.*

- char `get` (const char \*entry, void \*value, const void \*defaultValue, int defaultSize, int maxSize)

*Reads an entry from the group.*

- int `size` (const char \*entry)

*Returns the size of the value part of an entry.*

- char `getUserdataPath` (char \*path, int pathlen)

*Creates a path that is related to the preferences file and that is usable for application data beyond what is covered by `Fl_Preferences`.*

- void `flush` ()

*Write all preferences to disk.*

## Friends

- class `Node`
- class `RootNode`

### 30.67.1 Detailed Description

`Fl_Preferences` provides methods to store user settings between application starts.

It is similar to the Registry on WIN32 and Preferences on MacOS, and provides a simple configuration mechanism for UNIX.

`Fl_Preferences` uses a hierarchy to store data. It bundles similar data into groups and manages entries into those groups as name/value pairs.

Preferences are stored in text files that can be edited manually. The file format is easy to read and relatively forgiving. Preferences files are the same on all platforms. User comments in preference files are preserved. Filenames are unique for each application by using a vendor/application naming scheme. The user must provide default values for all entries to ensure proper operation should preferences be corrupted or not yet exist.

Entries can be of any length. However, the size of each preferences file should be kept under 100k for performance reasons. One application can have multiple preferences files. Extensive binary data however should be stored in separate files; see `getUserdataPath()`.

### 30.67.2 Member Enumeration Documentation

#### 30.67.2.1 enum `Fl_Preferences::Root`

Define the scope of the preferences.

**Enumerator:**

**SYSTEM** Preferences are used system-wide.

**USER** Preferences apply only to the current user.

### 30.67.3 Constructor & Destructor Documentation

#### 30.67.3.1 [Fl\\_Preferences::Fl\\_Preferences \(Root \*root\*, const char \\* \*vendor\*, const char \\* \*application\*\)](#)

The constructor creates a group that manages name/value pairs and child groups.

create the initial preferences base

- *root*: machine or user preferences
- *vendor*: unique identification of author or vendor of application Must be a valid directory name.

Groups are ready for reading and writing at any time. The root argument is either [Fl\\_Preferences::USER](#) or [Fl\\_Preferences::SYSTEM](#).

This constructor creates the *base* instance for all following entries and reads existing databases into memory. The vendor argument is a unique text string identifying the development team or vendor of an application. A domain name or an EMail address are great unique names, e.g. "researchATmatthiasm.com" or "fltk.org". The application argument can be the working title or final name of your application. Both vendor and application must be valid relative UNIX pathnames and may contain '/'s to create deeper file structures.

**Parameters:**

← *root* can be USER or SYSTEM for user specific or system wide preferences

← *vendor* unique text describing the company or author of this file

← *application* unique text describing the application

- *application*: vendor unique application name, i.e. "PreferencesTest" multiple preferences files can be created per application. Must be a valid file name. example: [Fl\\_Preferences](#) *base*( [Fl\\_Preferences::USER](#), "fltk.org", "test01" );

References [Fl\\_Preferences\(\)](#).

Referenced by [Fl\\_Preferences\(\)](#).

#### 30.67.3.2 [Fl\\_Preferences::Fl\\_Preferences \(const char \\* \*path\*, const char \\* \*vendor\*, const char \\* \*application\*\)](#)

This constructor is used to create or read a preferences file at an arbitrary position in the file system.

create the initial preferences base

- *path*: an application-supplied path example: [Fl\\_Preferences](#) *base*( "/usr/foo" );

The file name is generated as *path/application.prefs*. If *application* is 0, *path* must contain the full file name.

**Parameters:**

- ← *path* path to the directory that contains the preferences file
- ← *vendor* unique text describing the company or author of this file
- ← *application* unique text describing the application

References [Fl\\_Preferences\(\)](#).

**30.67.3.3 Fl\_Preferences::Fl\_Preferences (Fl\_Preferences & parent, const char \* group)**

This constructor generates a new group of preference entries inside the group or file *parent*.

create a Preferences node in relation to a parent node for reading and writing

- parent: base name for group
- group: group name (can contain '/' separated group names) example: [Fl\\_Preferences colors\( base, "setup/colors" \);](#)

The group argument identifies a group of entries. It can contain '/'s to get quick access to individual elements inside the hierarchy.

**Parameters:**

- ← *parent* reference object for the new group
- ← *group* name of the group to access (may contain '/'s)

References [Fl\\_Preferences\(\)](#), [node](#), and [rootNode](#).

**30.67.3.4 Fl\_Preferences::Fl\_Preferences (Fl\_Preferences \* parent, const char \* group)**

create a Preferences node in relation to a parent node for reading and writing

- parent: base name for group
- group: group name (can contain '/' separated group names) example: [Fl\\_Preferences colors\( base, "setup/colors" \);](#)

**See also:**

[Fl\\_Preferences\( Fl\\_Preferences&, const char \\*group \)](#)

References [Fl\\_Preferences\(\)](#), [node](#), and [rootNode](#).

**30.67.3.5 Fl\_Preferences::~Fl\_Preferences ()**

The destructor removes allocated resources.

destroy individual keys

- destroying the base preferences will flush changes to the prefs file
- after destroying the base, none of the depending preferences must be read or written

When used on the *base* preferences group, the destructor flushes all changes to the preferences file and deletes all internal databases.

### 30.67.4 Member Function Documentation

#### 30.67.4.1 char Fl\_Preferences::deleteEntry (const char \* *entry*)

Removes a single entry (name/value pair).

remove a single entry (name/value pair) example: buttonColor.deleteEntry( "red" );

##### Parameters:

← *entry* name of entry to delete

##### Returns:

0 if deleting the entry failed

#### 30.67.4.2 char Fl\_Preferences::deleteGroup (const char \* *group*)

Deletes a group.

delete a group example: setup.deleteGroup( "colors/buttons" );

##### Parameters:

← *group* name of the group to delete

##### Returns:

0 if call failed

#### 30.67.4.3 int Fl\_Preferences::entries ()

Returns the number of entries (name/value pairs) in a group.

return the number of entries (name/value) pairs for a group example: int n = buttonColor.entries();

##### Returns:

number of entries

#### 30.67.4.4 const char \* Fl\_Preferences::entry (int *index*)

Returns the name of an entry.

return the name of an entry

- there is no guaranteed order of entry names
- the index must be within the range given by [entries\(\)](#) example: printf( "Entry(%d)=%s\n", ix, buttonColor.entry(ix) );

There is no guaranteed order of entry names. The index must be within the range given by [entries\(\)](#).

**Parameters:**

← *index* number indexing the requested entry

**Returns:**

pointer to value cstring

**30.67.4.5 char Fl\_Preferences::entryExists (const char \* *key*)**

Returns non-zero if an entry with this name exists.

return 1, if an entry with this name exists example: if ( buttonColor.entryExists( "red" ) ).

**Parameters:**

← *key* name of entry that is searched for

**Returns:**

0 if entry was not found

..

**30.67.4.6 void Fl\_Preferences::flush ()**

Write all preferences to disk.

write all preferences to disk

- this function works only with the base preference group
- this function is rarely used as deleting the base preferences flushes automatically

This function works only with the base preference group. This function is rarely used as deleting the base preferences flushes automatically.

Referenced by Fl\_File\_Chooser::preview().

**30.67.4.7 char Fl\_Preferences::get (const char \* *entry*, void \* *value*, const void \* *defaultValue*, int *defaultSize*, int *maxSize*)**

Reads an entry from the group.

read a binary entry from the group the data will be moved into the given destination buffer data will be clipped to the buffer size

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). 'maxSize' is the maximum length of text that will be read.

**Parameters:**

← *entry* name of entry

→ *value* returned from preferences or default value if none was set

← *defaultValue* default value to be used if no preference was set

← *defaultSize* size of default value array  
 ← *maxSize* maximum length of value

**Returns:**

0 if the default value was used

**Todo**

*maxSize* should receive the number of bytes that were read.

**30.67.4.8 char Fl\_Preferences::get (const char \* *entry*, void \*& *value*, const void \* *defaultValue*, int *defaultSize*)**

Reads an entry from the group.

read a binary entry from the group 'data' will be changed to point to a new data buffer the data buffer must be deleted with 'free(data)' by the user.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). [get\(\)](#) allocates memory of sufficient size to hold the value. The buffer must be free'd by the developer using 'free(value)'.

**Parameters:**

← *entry* name of entry  
 → *value* returned from preferences or default value if none was set  
 ← *defaultValue* default value to be used if no preference was set  
 ← *defaultSize* size of default value array

**Returns:**

0 if the default value was used

**30.67.4.9 char Fl\_Preferences::get (const char \* *entry*, char \* *value*, const char \* *defaultValue*, int *maxSize*)**

Reads an entry from the group.

read a text entry from the group the text will be moved into the given text buffer text will be clipped to the buffer size

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). 'maxSize' is the maximum length of text that will be read. The text buffer must allow for one additional byte for a trailing zero.

**Parameters:**

← *entry* name of entry  
 → *value* returned from preferences or default value if none was set  
 ← *defaultValue* default value to be used if no preference was set  
 ← *maxSize* maximum length of value plus one byte for a trailing zero

**Returns:**

0 if the default value was used

**30.67.4.10 char Fl\_Preferences::get (const char \* *entry*, char \*& *value*, const char \* *defaultValue*)**

Reads an entry from the group.

read a text entry from the group 'text' will be changed to point to a new text buffer the text buffer must be deleted with 'free(text)' by the user.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). [get\(\)](#) allocates memory of sufficient size to hold the value. The buffer must be free'd by the developer using 'free(value)'.

**Parameters:**

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

**Returns:**

0 if the default value was used

**30.67.4.11 char Fl\_Preferences::get (const char \* *entry*, double & *value*, double *defaultValue*)**

Reads an entry from the group.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0).

**Parameters:**

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

**Returns:**

0 if the default value was used

**30.67.4.12 char Fl\_Preferences::get (const char \* *entry*, float & *value*, float *defaultValue*)**

Reads an entry from the group.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0).

**Parameters:**

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

**Returns:**

0 if the default value was used

**30.67.4.13 char Fl\_Preferences::get (const char \* *entry*, int & *value*, int *defaultValue*)**

Reads an entry from the group.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0).

**Parameters:**

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

**Returns:**

0 if the default value was used

Referenced by Fl\_File\_Chooser::Fl\_File\_Chooser(), and Fl\_File\_Chooser::rescan\_keep\_filename().

**30.67.4.14 char Fl\_Preferences::getUserdataPath (char \* *path*, int *pathlen*)**

Creates a path that is related to the preferences file and that is usable for application data beyond what is covered by [Fl\\_Preferences](#).

creates a path that is related to the preferences file and that is usable for application data beyond what is covered by [Fl\\_Preferences](#).

**Parameters:**

- *path* buffer for user data path
- ← *pathlen* size of path buffer

**Returns:**

0 if path was not created or pathname can't fit into buffer

- 'getUserdataPath' actually creates the directory
- 'path' must be large enough to receive a complete file path example: [Fl\\_Preferences](#) prefs( USER, "matthiasm.com", "test" ); char path[FL\_PATH\_MAX]; prefs.getUserdataPath( path ); sample returns: Win32: c:/Documents and Settings/matt/Application Data/matthiasm.com/test/ prefs: c:/Documents and Settings/matt/Application Data/matthiasm.com/test.prefs

**30.67.4.15 const char \* Fl\_Preferences::group (int *num\_group*)**

Returns the name of the Nth group.

return the group name of the n'th group

- there is no guaranteed order of group names
- the index must be within the range given by [groups\(\)](#) example: printf( "Group(%d)=%s\n", ix, base.group(ix) );

There is no guaranteed order of group names. The index must be within the range given by [groups\(\)](#).

**Parameters:**

← *num\_group* number indexing the requested group

**Returns:**

cstring pointer to the group name

#### 30.67.4.16 char Fl\_Preferences::groupExists (const char \* *key*)

Returns non-zero if a group with this name exists.

return 1, if a group with this name exists example: if ( base.groupExists( "setup/colors" ) ).

Groupnames are relative to the Preferences node and can contain a path. "." describes the current node, "./" describes the topmost node. By preceding a groupname with a "./", its path becomes relative to the topmost node.

**Parameters:**

← *key* name of group that is searched for

**Returns:**

0 if group was not found

..

#### 30.67.4.17 int Fl\_Preferences::groups ()

Returns the number of groups that are contained within a group.

return the number of groups that are contained within a group example: int n = base.groups();

**Returns:**

0 for no groups at all

#### 30.67.4.18 char Fl\_Preferences::set (const char \* *entry*, const void \* *value*, int *size*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

← *entry* name of entry

← *value* set this entry to *value*

← *size* of data array

**Returns:**

0 if setting the value failed

**30.67.4.19 char Fl\_Preferences::set (const char \* *entry*, const char \* *value*)**

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

**Returns:**

0 if setting the value failed

**30.67.4.20 char Fl\_Preferences::set (const char \* *entry*, double *value*, int *precision*)**

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*
- ← ***precision*** number of decimal digits to represent value

**Returns:**

0 if setting the value failed

**30.67.4.21 char Fl\_Preferences::set (const char \* *entry*, double *value*)**

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

**Returns:**

0 if setting the value failed

**30.67.4.22 char Fl\_Preferences::set (const char \* *entry*, float *value*, int *precision*)**

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*
- ← ***precision*** number of decimal digits to represent value

**Returns:**

0 if setting the value failed

**30.67.4.23 char Fl\_Preferences::set (const char \* *entry*, float *value*)**

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

**Returns:**

0 if setting the value failed

**30.67.4.24 char Fl\_Preferences::set (const char \* *entry*, int *value*)**

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

**Parameters:**

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

**Returns:**

0 if setting the value failed

Referenced by Fl\_File\_Chooser::preview().

**30.67.4.25 int Fl\_Preferences::size (const char \* *entry*)**

Returns the size of the value part of an entry.

return the size of the value part of an entry

**Returns:**

size of value

The documentation for this class was generated from the following files:

- [Fl\\_Preferences.H](#)
- [Fl\\_Preferences.cxx](#)

## 30.68 Fl\_Preferences::Entry Struct Reference

An entry associates a preference name to its corresponding value.

```
#include <Fl_Preferences.H>
```

### Public Attributes

- char \* **name**
- char \* **value**

#### 30.68.1 Detailed Description

An entry associates a preference name to its corresponding value.

The documentation for this struct was generated from the following file:

- [Fl\\_Preferences.H](#)

## 30.69 Fl\_Preferences::Name Class Reference

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

```
#include <Fl_Preferences.H>
```

### Public Member Functions

- [Name \(unsigned int n\)](#)  
*Create a numerical name.*
- [Name \(const char \\*format,...\)](#)  
*Create a name using 'printf' style formatting.*
- [operator const char \\* \(\)](#)  
*Return the Name as a c-string.*

### 30.69.1 Detailed Description

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

Example: `prefs.set(Fl_Preferences::Name("File%d",i),file[i]);`.

See `test/preferences.cxx` as a sample for writing arrays into preferences.

'Name' is actually implemented as a class inside [Fl\\_Preferences](#). It casts into `const char*` and gets automatically destroyed after the enclosing call ends.

### 30.69.2 Constructor & Destructor Documentation

#### 30.69.2.1 Fl\_Preferences::Name (unsigned int n)

Create a numerical name.

create a group name or entry name on the fly

- this version creates a simple unsigned integer as an entry name example: `int n, i; Fl_Preferences prev( appPrefs, "PreviousFiles" ); prev.get( "n", 0 ); for ( i=0; i<n; i++ ) prev.get( Fl_Preferences::Name(i), prevFile[i], "" );`

#### 30.69.2.2 Fl\_Preferences::Name (const char \*format, ...)

Create a name using 'printf' style formatting.

create a group name or entry name on the fly

- this version creates entry names as in 'printf' example: `int n, i; Fl_Preferences prefs( USER, "matthias.com", "test" ); prev.get( "nFiles", 0 ); for ( i=0; i<n; i++ ) prev.get( Fl_Preferences::Name( "File%d", i ), prevFile[i], "" );`

The documentation for this class was generated from the following files:


- [Fl\\_Preferences.H](#)
- [Fl\\_Preferences.cxx](#)

## 30.70 Fl\_Progress Class Reference

Displays a progress bar for the user.

```
#include <Fl_Progress.h>
```

Inheritance diagram for Fl\_Progress::



### Public Member Functions

- [Fl\\_Progress](#) (int x, int y, int w, int h, const char \*l=0)

*The constructor creates the progress bar using the position, size, and label.*

- void [maximum](#) (float v)

*Sets the maximum value in the progress widget.*

- float [maximum](#) () const

*Gets the maximum value in the progress widget.*

- void [minimum](#) (float v)

*Sets the minimum value in the progress widget.*

- float [minimum](#) () const

*Gets the minimum value in the progress widget.*

- void [value](#) (float v)

*Sets the current value in the progress widget.*

- float [value](#) () const

*Gets the current value in the progress widget.*

### Protected Member Functions

- virtual void [draw](#) ()

*Draws the check button.*

#### 30.70.1 Detailed Description

Displays a progress bar for the user.

### 30.70.2 Constructor & Destructor Documentation

#### 30.70.2.1 **Fl\_Progress::Fl\_Progress (int X, int Y, int W, int H, const char \* l = 0)**

The constructor creates the progress bar using the position, size, and label.

The inherited destructor removes the progress bar.

References Fl\_Widget::align(), Fl\_Widget::box(), Fl\_Widget::color(), FL\_ALIGN\_INSIDE, FL\_BACKGROUND2\_COLOR, FL\_DOWN\_BOX, maximum(), minimum(), and value().

### 30.70.3 Member Function Documentation

#### 30.70.3.1 **void Fl\_Progress::draw (void) [protected, virtual]**

Draws the check button.

Implements [Fl\\_Widget](#).

References Fl\_Widget::active\_r(), Fl\_Widget::box(), Fl::box\_dh(), Fl::box\_dw(), Fl::box\_dx(), Fl::box\_dy(), Fl\_Widget::color(), Fl\_Widget::color2(), Fl\_Widget::draw\_box(), Fl\_Widget::draw\_label(), fl\_clip(), fl\_pop\_clip(), Fl\_Widget::h(), Fl\_Widget::labelcolor(), Fl\_Widget::w(), Fl\_Widget::x(), and Fl\_Widget::y().

#### 30.70.3.2 **float Fl\_Progress::maximum () const [inline]**

Gets the maximum value in the progress widget.

Referenced by [Fl\\_Progress\(\)](#).

#### 30.70.3.3 **void Fl\_Progress::maximum (float v) [inline]**

Sets the maximum value in the progress widget.

References Fl\_Widget::redraw().

#### 30.70.3.4 **float Fl\_Progress::minimum () const [inline]**

Gets the minimum value in the progress widget.

Referenced by [Fl\\_Progress\(\)](#).

#### 30.70.3.5 **void Fl\_Progress::minimum (float v) [inline]**

Sets the minimum value in the progress widget.

References Fl\_Widget::redraw().

#### 30.70.3.6 **float Fl\_Progress::value () const [inline]**

Gets the current value in the progress widget.

Referenced by [Fl\\_Progress\(\)](#).

**30.70.3.7 void Fl\_Progress::value (float *v*) [inline]**

Sets the current value in the progress widget.

References Fl\_Widget::redraw().

The documentation for this class was generated from the following files:


- [Fl\\_Progress.H](#)
- [Fl\\_Progress.cxx](#)

## 30.71 Fl\_Repeat\_Button Class Reference

The [Fl\\_Repeat\\_Button](#) is a subclass of [Fl\\_Button](#) that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down.

```
#include <Fl_Repeat_Button.h>
```

Inheritance diagram for Fl\_Repeat\_Button::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Repeat\\_Button](#) (int X, int Y, int W, int H, const char \*l=0)  
*Creates a new [Fl\\_Repeat\\_Button](#) widget using the given position, size, and label string.*
- void [deactivate](#) ()  
*Deactivate a widget.*

#### 30.71.1 Detailed Description

The [Fl\\_Repeat\\_Button](#) is a subclass of [Fl\\_Button](#) that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down.

The speed of the repeat is fixed and depends on the implementation.

#### 30.71.2 Constructor & Destructor Documentation

##### 30.71.2.1 [Fl\\_Repeat\\_Button::Fl\\_Repeat\\_Button](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Repeat\\_Button](#) widget using the given position, size, and label string.

The default boxtyle is FL\_UP\_BOX. Deletes the button.

#### 30.71.3 Member Function Documentation

##### 30.71.3.1 [void Fl\\_Repeat\\_Button::deactivate](#) () [inline]

Deactivate a widget.

Inactive widgets will be drawn "grayed out", e.g. with less contrast than the active widget. Inactive widgets will not receive any keyboard or mouse button events. Other events (including FL\_ENTER, FL\_MOVE, FL\_LEAVE, FL\_SHORTCUT, and others) will still be sent. A widget is only active if [active\(\)](#) is true on it and all of its parents.

Changing this value will send FL\_DEACTIVATE to the widget if [active\\_r\(\)](#) is true.

Currently you cannot deactivate [Fl\\_Window](#) widgets.

**See also:**

[activate\(\)](#), [active\(\)](#), [active\\_r\(\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::deactivate\(\)](#), and [Fl::remove\\_timeout\(\)](#).

### 30.71.3.2 int Fl\_Repeat\_Button::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Button](#).

References [Fl\\_Widget::active\(\)](#), [Fl::add\\_timeout\(\)](#), [Fl\\_Widget::do\\_callback\(\)](#), [Fl::event\\_inside\(\)](#), [FL\\_DEACTIVATE](#), [FL\\_DRAG](#), [FL\\_HIDE](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [Fl::focus\(\)](#), [Fl::remove\\_timeout\(\)](#), [Fl\\_Button::value\(\)](#), and [Fl::visible\\_focus\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Repeat\\_Button.H](#)
- [Fl\\_Repeat\\_Button.cxx](#)

## 30.72 Fl\_Return\_Button Class Reference

The [Fl\\_Return\\_Button](#) is a subclass of [Fl\\_Button](#) that generates a callback when it is pressed or when the user presses the Enter key.

```
#include <Fl_Return_Button.h>
```

Inheritance diagram for Fl\_Return\_Button::



### Public Member Functions

- int [handle](#) (int)

*Handles the specified event.*

- [Fl\\_Return\\_Button](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Return\\_Button](#) widget using the given position, size, and label string.*

### Protected Member Functions

- void [draw](#) ()

*Draw the widget.*

#### 30.72.1 Detailed Description

The [Fl\\_Return\\_Button](#) is a subclass of [Fl\\_Button](#) that generates a callback when it is pressed or when the user presses the Enter key.

A carriage-return symbol is drawn next to the button label.




Figure 30.23: Fl\_Return\_Button

### 30.72.2 Constructor & Destructor Documentation

#### 30.72.2.1 **Fl\_Return\_Button::Fl\_Return\_Button (int X, int Y, int W, int H, const char \* l = 0)** [inline]

Creates a new [Fl\\_Return\\_Button](#) widget using the given position, size, and label string.

The default boxtyle is FL\_UP\_BOX.

The inherited destructor deletes the button.

### 30.72.3 Member Function Documentation

#### 30.72.3.1 **void Fl\_Return\_Button::draw ()** [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Button](#).

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Button::down\\_box\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Widget::draw\\_focus\(\)](#), [Fl\\_Widget::draw\\_label\(\)](#), [FL\\_HIDDEN\\_BUTTON](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Button::value\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.72.3.2 **int Fl\_Return\_Button::handle (int event)** [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Button](#).

References `Fl_Widget::do_callback()`, `Fl::event_key()`, `FL_Enter`, `FL_KP_Enter`, and `FL_SHORTCUT`.

The documentation for this class was generated from the following files:


- [Fl\\_Return\\_Button.H](#)
- [Fl\\_Return\\_Button.cxx](#)

## 30.73 Fl\_RGB\_Image Class Reference

The [Fl\\_RGB\\_Image](#) class supports caching and drawing of full-color images with 1 to 4 channels of color information.

```
#include <Fl_Image.h>
```

Inheritance diagram for Fl\_RGB\_Image::

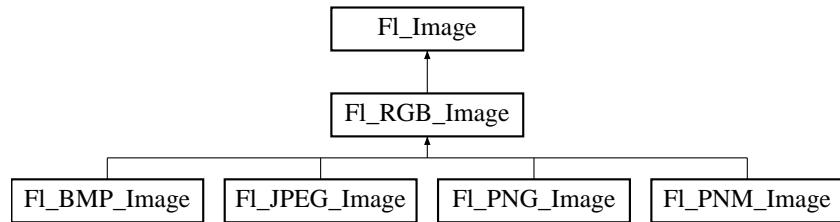

### Public Member Functions

- [Fl\\_RGB\\_Image](#) (const uchar \*bits, int W, int H, int D=3, int LD=0)  
*The constructor creates a new image from the specified data.*
- virtual [~Fl\\_RGB\\_Image](#) ()  
*The destructor free all memory and server resources that are used by the image.*
- virtual [Fl\\_Image \\* copy](#) (int W, int H)  
*The [copy\(\)](#) method creates a copy of the specified image.*
- [Fl\\_Image \\* copy](#) ()  
*The [copy\(\)](#) method creates a copy of the specified image.*
- virtual void [color\\_average](#) (Fl\_Color c, float i)  
*The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value c.*
- virtual void [desaturate](#) ()  
*The [desaturate\(\)](#) method converts an image to grayscale.*
- virtual void [draw](#) (int X, int Y, int W, int H, int cx=0, int cy=0)  
*The [draw\(\)](#) methods draw the image.*
- void [draw](#) (int X, int Y)  
*The [draw\(\)](#) methods draw the image.*
- virtual void [label](#) (Fl\_Widget \*w)  
*The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.*
- virtual void [label](#) (Fl\_Menu\_Item \*m)  
*The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.*
- virtual void [uncache](#) ()  
*If the image has been cached for display, delete the cache data.*

## Public Attributes

- const uchar \* **array**
- int **alloc\_array**
- unsigned **id**
- unsigned **mask**

### 30.73.1 Detailed Description

The [Fl\\_RGB\\_Image](#) class supports caching and drawing of full-color images with 1 to 4 channels of color information.

Images with an even number of channels are assumed to contain alpha information, which is used to blend the image with the contents of the screen.

[Fl\\_RGB\\_Image](#) is defined in <FL/Fl\_Image.H>, however for compatibility reasons <FL/Fl\_RGB\_Image.H> should be included.

### 30.73.2 Constructor & Destructor Documentation

#### 30.73.2.1 [Fl\\_RGB\\_Image::Fl\\_RGB\\_Image](#) (const uchar \* *bits*, int *W*, int *H*, int *D* = 3, int *LD* = 0) [inline]

The constructor creates a new image from the specified data.

References [Fl\\_Image::data\(\)](#), and [Fl\\_Image::id\(\)](#).

Referenced by [copy\(\)](#).

#### 30.73.2.2 [Fl\\_RGB\\_Image::~Fl\\_RGB\\_Image](#) () [virtual]

The destructor free all memory and server resources that are used by the image.

References [uncache\(\)](#).

### 30.73.3 Member Function Documentation

#### 30.73.3.1 [void Fl\\_RGB\\_Image::color\\_average](#) ([Fl\\_Color](#) *c*, float *i*) [virtual]

The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value *c*.

The *i* argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::d\(\)](#), [Fl::get\\_color\(\)](#), [Fl\\_Image::h\(\)](#), [Fl\\_Image::id\(\)](#), [uncache\(\)](#), and [Fl\\_Image::w\(\)](#).

#### 30.73.3.2 [Fl\\_Image\\* Fl\\_RGB\\_Image::copy](#) () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [copy\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [copy\(\)](#).

### 30.73.3.3 **Fl\_Image \* Fl\_RGB\_Image::copy (int W, int H) [virtual]**

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [alloc\\_array](#), [Fl\\_Image::d\(\)](#), [Fl\\_RGB\\_Image\(\)](#), [Fl\\_Image::h\(\)](#), [Fl\\_Image::ld\(\)](#), and [Fl\\_Image::w\(\)](#).

### 30.73.3.4 **void Fl\_RGB\_Image::desaturate () [virtual]**

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::d\(\)](#), [Fl\\_Image::h\(\)](#), [Fl\\_Image::ld\(\)](#), [uncache\(\)](#), and [Fl\\_Image::w\(\)](#).

### 30.73.3.5 **void Fl\_RGB\_Image::draw (int X, int Y) [inline]**

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl\\_Image](#).

References [draw\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [draw\(\)](#).

### 30.73.3.6 **void Fl\_RGB\_Image::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]**

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::d\(\)](#), [Fl\\_Image::draw\\_empty\(\)](#), [fl\\_clip\\_box\(\)](#), [fl\\_restore\\_clip\(\)](#), [Fl\\_Image::h\(\)](#), [Fl\\_Image::ld\(\)](#), and [Fl\\_Image::w\(\)](#).

**30.73.3.7 void Fl\_RGB\_Image::label (Fl\_Menu\_Item \* *m*) [virtual]**

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented from [Fl\\_Image](#).

References [\\_FL\\_IMAGE\\_LABEL](#), [Fl\\_Menu\\_Item::label\(\)](#), and [Fl::set\\_labeltype\(\)](#).

**30.73.3.8 void Fl\_RGB\_Image::label (Fl\_Widget \* *widget*) [virtual]**

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl\\_Widget](#) and [Fl\\_Menu\\_Item](#) classes instead.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Widget::image\(\)](#).

**30.73.3.9 void Fl\_RGB\_Image::uncache () [virtual]**

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl\\_Image](#).

Referenced by [color\\_average\(\)](#), [desaturate\(\)](#), and [~Fl\\_RGB\\_Image\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Image.H](#)
- [Fl\\_Image.cxx](#)

## 30.74 Fl\_Roller Class Reference

The [Fl\\_Roller](#) widget is a "dolly" control commonly used to move 3D objects.

```
#include <Fl_Roller.h>
```

Inheritance diagram for Fl\_Roller::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Roller](#) (int X, int Y, int W, int H, const char \*L=0)  
*Creates a new [Fl\\_Roller](#) widget using the given position, size, and label string.*

### Protected Member Functions

- void [draw](#) ()  
*Draw the widget.*

#### 30.74.1 Detailed Description

The [Fl\\_Roller](#) widget is a "dolly" control commonly used to move 3D objects.

Figure 30.24: Fl\_Roller

### 30.74.2 Constructor & Destructor Documentation

#### 30.74.2.1 **Fl\_Roller::Fl\_Roller (int X, int Y, int W, int H, const char \*L = 0)**

Creates a new [Fl\\_Roller](#) widget using the given position, size, and label string.

The default boxtyle is FL\_NO\_BOX.

Inherited destructor destroys the valuator.

References [Fl\\_Widget::box\(\)](#), [FL\\_UP\\_BOX](#), and [Fl\\_Valuator::step\(\)](#).

### 30.74.3 Member Function Documentation

#### 30.74.3.1 **void Fl\_Roller::draw () [protected, virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References [Fl\\_Widget::active\\_r\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Widget::draw\\_focus\(\)](#), [fl\\_color\(\)](#), [fl\\_rectf\(\)](#), [FL\\_THIN\\_UP\\_FRAME](#), [fl\\_xyline\(\)](#), [fl\\_yxline\(\)](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Valuator::horizontal\(\)](#), [Fl\\_Valuator::step\(\)](#), [Fl\\_Valuator::value\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.74.3.2 **int Fl\_Roller::handle (int event) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← *event* the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References Fl\_Valuator::clamp(), Fl::event\_key(), Fl::event\_x(), Fl::event\_y(), FL\_Down, FL\_DRAG, FL\_ENTER, FL\_FOCUS, FL\_KEYBOARD, FL\_LEAVE, FL\_Left, FL\_PUSH, FL\_RELEASE, FL\_Right, FL\_UNFOCUS, FL\_Up, Fl::focus(), Fl\_Valuator::handle\_drag(), Fl\_Valuator::handle\_push(), Fl\_Valuator::handle\_release(), Fl\_Valuator::horizontal(), Fl\_Valuator::increment(), Fl\_Valuator::previous\_value(), Fl\_Widget::redraw(), Fl\_Valuator::round(), Fl\_Valuator::value(), and Fl::visible\_focus().

The documentation for this class was generated from the following files:


- [Fl\\_Roller.H](#)
- Fl\_Roller.cxx

## 30.75 Fl\_Round\_Button Class Reference

Buttons generate callbacks when they are clicked by the user.

```
#include <Fl_Round_Button.H>
```

Inheritance diagram for Fl\_Round\_Button::



### Public Member Functions

- [Fl\\_Round\\_Button](#) (int x, int y, int w, int h, const char \*l=0)

*Creates a new [Fl\\_Round\\_Button](#) widget using the given position, size, and label string.*

### 30.75.1 Detailed Description

Buttons generate callbacks when they are clicked by the user.

You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

Figure 30.25: Fl\_Round\_Button

The [Fl\\_Round\\_Button](#) subclass display the "on" state by turning on a light, rather than drawing pushed in. The shape of the "light" is initially set to [FL\\_ROUND\\_DOWN\\_BOX](#). The color of the light when on is controlled with [selection\\_color\(\)](#), which defaults to [FL\\_RED](#).

The documentation for this class was generated from the following files:


- [Fl\\_Round\\_Button.H](#)
- [Fl\\_Round\\_Button.cxx](#)

## 30.76 Fl\_Round\_Clock Class Reference

A clock widget of type FL\_ROUND\_CLOCK.

```
#include <Fl_Round_Clock.H>
```

Inheritance diagram for Fl\_Round\_Clock::



### Public Member Functions

- [Fl\\_Round\\_Clock](#) (int x, int y, int w, int h, const char \*l=0)  
*Creates the clock widget, setting his type and box.*

#### 30.76.1 Detailed Description

A clock widget of type FL\_ROUND\_CLOCK.

Has no box.

#### 30.76.2 Constructor & Destructor Documentation

##### 30.76.2.1 [Fl\\_Round\\_Clock::Fl\\_Round\\_Clock](#) (int x, int y, int w, int h, const char \* l = 0) [inline]

Creates the clock widget, setting his type and box.

References Fl\_Widget::box(), FL\_NO\_BOX, FL\_ROUND\_CLOCK, and Fl\_Widget::type().

The documentation for this class was generated from the following file:


- [Fl\\_Round\\_Clock.H](#)

## 30.77 Fl\_Scroll Class Reference

This container widget lets you maneuver around a set of widgets much larger than your window.

```
#include <Fl_Scroll.h>
```

Inheritance diagram for Fl\_Scroll::



### Public Types

- enum {
 **HORIZONTAL** = 1, **VERTICAL** = 2, **BOTH** = 3, **ALWAYS\_ON** = 4,  
**HORIZONTAL\_ALWAYS** = 5, **VERTICAL\_ALWAYS** = 6, **BOTH\_ALWAYS** = 7 }

### Public Member Functions

- void **resize** (int, int, int, int)  
*This resizes the [Fl\\_Group](#) widget and all of its children.*
- int **handle** (int)  
*Handles the specified event.*
- [\*\*Fl\\_Scroll\*\*](#) (int X, int Y, int W, int H, const char \*l=0)  
*Creates a new [Fl\\_Scroll](#) widget using the given position, size, and label string.*
- int **xposition** () const  
*Gets the current horizontal scrolling position.*
- int **yposition** () const  
*Gets the current vertical scrolling position.*
- void **scroll\_to** (int, int)  
*Moves the contents of the scroll group to a new position.*
- void **clear** ()  
*Clear all but the scrollbars.*

### Public Attributes

- [\*\*Fl\\_Scrollbar scrollbar\*\*](#)
- [\*\*Fl\\_Scrollbar hscrollbar\*\*](#)

## Protected Member Functions

- void **bbox** (int &, int &, int &, int &)
- void **draw** ()

*Draw the widget.*

### 30.77.1 Detailed Description

This container widget lets you maneuver around a set of widgets much larger than your window.

If the child widgets are larger than the size of this object then scrollbars will appear so that you can scroll over to them:




Figure 30.26: `FL_Scroll`

If all of the child widgets are packed together into a solid rectangle then you want to set `box()` to `FL_NO_BOX` or one of the `_FRAME` types. This will result in the best output. However, if the child widgets are a sparse arrangement you must set `box()` to a real `_BOX` type. This can result in some blinking during redrawing, but that can be solved by using a [FL\\_Double\\_Window](#).

By default you can scroll in both directions, and the scrollbars disappear if the data will fit in the area of the scroll.

Use `FL_Scroll::type()` to change this as follows :

- 0 - No scrollbars
- `FL_Scroll::HORIZONTAL` - Only a horizontal scrollbar.
- `FL_Scroll::VERTICAL` - Only a vertical scrollbar.
- `FL_Scroll::BOTH` - The default is both scrollbars.
- `FL_Scroll::HORIZONTAL_ALWAYS` - Horizontal scrollbar always on, vertical always off.
- `FL_Scroll::VERTICAL_ALWAYS` - Vertical scrollbar always on, horizontal always off.
- `FL_Scroll::BOTH_ALWAYS` - Both always on.

Use `scrollbar.align(int)` ( see void [FL\\_Widget::align\(FL\\_Align\)](#) ) : to change what side the scrollbars are drawn on.

If the `FL_ALIGN_LEFT` bit is on, the vertical scrollbar is on the left. If the `FL_ALIGN_TOP` bit is on, the horizontal scrollbar is on the top. Note that only the alignment flags in scrollbar are considered. The flags in h-scrollbar however are ignored.

This widget can also be used to pan around a single child widget "canvas". This child widget should be of your own class, with a [draw\(\)](#) method that draws the contents. The scrolling is done by changing the [x\(\)](#) and [y\(\)](#) of the widget, so this child must use the [x\(\)](#) and [y\(\)](#) to position it's drawing. To speed up drawing it should test [fl\\_push\\_clip\(\)](#).

Another very useful child is a single [Fl\\_Pack](#), which is itself a group that packs it's children together and changes size to surround them. Filling the [Fl\\_Pack](#) with [Fl\\_Tabs](#) groups (and then putting normal widgets inside those) gives you a very powerful scrolling list of individually-openable panels.

Fluid lets you create these, but you can only lay out objects that fit inside the [Fl\\_Scroll](#) without scrolling. Be sure to leave space for the scrollbars, as Fluid won't show these either.

*You cannot use [Fl\\_Window](#) as a child of this since the clipping is not conveyed to it when drawn, and it will draw over the scrollbars and neighboring objects.*

## 30.77.2 Constructor & Destructor Documentation

### 30.77.2.1 [Fl\\_Scroll::Fl\\_Scroll \(int X, int Y, int W, int H, const char \\* L = 0\)](#)

Creates a new [Fl\\_Scroll](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_NO\\_BOX](#).

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl\\_Scroll](#) and all of it's children can be automatic (local) variables, but you must declare the [Fl\\_Scroll](#) first, so that it is destroyed last.

References [Fl\\_Widget::callback\(\)](#), [FL\\_HORIZONTAL](#), and [Fl\\_Widget::type\(\)](#).

## 30.77.3 Member Function Documentation

### 30.77.3.1 [void Fl\\_Scroll::clear \(\)](#)

Clear all but the scrollbars.

..

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Group::child\(\)](#), and [Fl\\_Group::children\(\)](#).

### 30.77.3.2 [void Fl\\_Scroll::draw \(\) \[protected, virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Widget::align\(\)](#), [Fl\\_Group::array\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [Fl\\_Group::children\(\)](#), [Fl\\_Widget::clear\\_visible\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Group::draw\\_child\(\)](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_ALIGN\\_TOP](#), [fl\\_clip](#), [fl\\_color\(\)](#), [Fl\\_Object](#), [fl\\_pop\\_clip\(\)](#), [fl\\_rectf\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::resize\(\)](#),

`Fl_Widget::set_visible()`, `Fl_Widget::type()`, `Fl_Group::update_child()`, `Fl_Scrollbar::value()`, `Fl_Widget::visible()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.77.3.3 int Fl\_Scroll::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Group](#).

### 30.77.3.4 void Fl\_Scroll::resize (int *X*, int *Y*, int *W*, int *H*) [virtual]

This resizes the [Fl\\_Group](#) widget and all of its children.

The [Fl\\_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for `Fl_Group::resizable(Fl_Widget*)`

**See also:**

[Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)  
[Fl\\_Group::resizable\(\)](#)  
[Fl\\_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl\\_Group](#).

References `Fl_Widget::align()`, `Fl_Group::array()`, `Fl_Group::children()`, `FL_ALIGN_LEFT`, `FL_ALIGN_TOP`, `Fl_Object`, `Fl_Widget::h()`, `Fl_Widget::position()`, `Fl_Widget::redraw()`, `Fl_Widget::visible()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.77.3.5 void Fl\_Scroll::scroll\_to (int *X*, int *Y*)

Moves the contents of the scroll group to a new position.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::damage()`, `Fl_Widget::parent()`, `Fl_Widget::position()`, `Fl_Widget::window()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

**30.77.3.6 int Fl\_Scroll::xposition () const [inline]**

Gets the current horizontal scrolling position.

**30.77.3.7 int Fl\_Scroll::yposition () const [inline]**

Gets the current vertical scrolling position.

The documentation for this class was generated from the following files:


- [Fl\\_Scroll.H](#)
- [Fl\\_Scroll.cxx](#)

## 30.78 Fl\_Scrollbar Class Reference

The [Fl\\_Scrollbar](#) widget displays a slider with arrow buttons at the ends of the scrollbar.

```
#include <Fl_Scrollbar.H>
```

Inheritance diagram for Fl\_Scrollbar::



### Public Member Functions

- [Fl\\_Scrollbar](#) (int x, int y, int w, int h, const char \*l=0)

*Creates a new [Fl\\_Scrollbar](#) widget using the given position, size, and label string.*

- [~Fl\\_Scrollbar](#) ()

*Destroys the Scrollbar.*

- int [handle](#) (int)

*Handles the specified event.*

- int [value](#) ()

*The first form returns the integer value of the scrollbar.*

- int [value](#) (int p, int s, int top, int total)

*See int [Fl\\_Scrollbar::value\(\)](#).*

- int [linesize](#) () const

*This number controls how big the steps are that the arrow keys do.*

- void [linesize](#) (int i)

*This number controls how big the steps are that the arrow keys do.*

### Protected Member Functions

- void [draw](#) ()

*Draw the widget.*

### 30.78.1 Detailed Description

The [Fl\\_Scrollbar](#) widget displays a slider with arrow buttons at the ends of the scrollbar.

Clicking on the arrows move up/left and down/right by [linesize\(\)](#). Scrollbars also accept FL\_SHORTCUT events: the arrows move by [linesize\(\)](#), and vertical scrollbars take Page Up/Down (they move by the page size minus [linesize\(\)](#)) and Home/End (they jump to the top or bottom).

Scrollbars have step(1) preset (they always return integers). If desired you can set the [step\(\)](#) to non-integer values. You will then have to use casts to get at the floating-point versions of [value\(\)](#) from [Fl\\_Slider](#).

Figure 30.27: Fl\_Scrollbar

### 30.78.2 Constructor & Destructor Documentation

#### 30.78.2.1 [Fl\\_Scrollbar::Fl\\_Scrollbar \(int X, int Y, int W, int H, const char \\* L = 0\)](#)

Creates a new [Fl\\_Scrollbar](#) widget using the given position, size, and label string.

You need to do type([FL\\_HORIZONTAL](#)) if you want a horizontal scrollbar.

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::color\(\)](#), [FL\\_FLAT\\_BOX](#), [FL\\_UP\\_BOX](#), [Fl\\_Slider::slider\(\)](#), and [Fl\\_Valuator::step\(\)](#).

#### 30.78.2.2 [Fl\\_Scrollbar::~Fl\\_Scrollbar \(\)](#)

Destroys the Scrollbar.

References [Fl::remove\\_timeout\(\)](#).

### 30.78.3 Member Function Documentation

#### 30.78.3.1 [void Fl\\_Scrollbar::draw \(\) \[protected, virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Slider](#).

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `fl_color()`, `fl_polygon()`, `Fl_Widget::h()`, `Fl_Valuator::horizontal()`, `Fl_Widget::labelcolor()`, `Fl_Widget::selection_color()`, `Fl_Slider::slider()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### **30.78.3.2 int Fl\_Scrollbar::handle (int *event*) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Slider](#).

References `Fl::add_timeout()`, `Fl_Valuator::clamp()`, `Fl_Widget::damage()`, `Fl_Widget::do_callback()`, `Fl::event_button()`, `Fl::event_key()`, `Fl::event_x()`, `Fl::event_y()`, `FL_Down`, `FL_DRAG`, `FL_End`, `FL_ENTER`, `FL_Home`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_Left`, `FL_MIDDLE_MOUSE`, `FL_MOUSEWHEEL`, `FL_Page_Down`, `FL_Page_Up`, `FL_PUSH`, `FL_RELEASE`, `FL_Right`, `FL_SHORTCUT`, `FL_Up`, `Fl_Widget::h()`, `Fl_Valuator::handle_drag()`, `Fl_Valuator::handle_push()`, `Fl_Valuator::handle_release()`, `Fl_Valuator::horizontal()`, `Fl_Valuator::maximum()`, `Fl_Valuator::minimum()`, `Fl::remove_timeout()`, `Fl_Widget::set_changed()`, `Fl_Slider::slider_size()`, `Fl_Widget::type()`, `value()`, `Fl_Valuator::value_damage()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### **30.78.3.3 void Fl\_Scrollbar::linesize (int *i*) [inline]**

This number controls how big the steps are that the arrow keys do.

In addition page up/down move by the size last sent to [value\(\)](#) minus one [linesize\(\)](#). The default is 16.

### **30.78.3.4 int Fl\_Scrollbar::linesize () const [inline]**

This number controls how big the steps are that the arrow keys do.

In addition page up/down move by the size last sent to [value\(\)](#) minus one [linesize\(\)](#). The default is 16.

Referenced by [Fl\\_Browser\\_::draw\(\)](#).

**30.78.3.5 int Fl\_Scrollbar::value () [inline]**

The first form returns the integer value of the scrollbar.

You can get the floating point value with [Fl\\_Slider::value\(\)](#). The second form sets [value\(\)](#), [range\(\)](#), and [slider\\_size\(\)](#) to make a variable-sized scrollbar. You should call this every time your window changes size, your data changes size, or your scroll position changes (even if in response to a callback from this scrollbar). All necessary calls to [redraw\(\)](#) are done.

References [Fl\\_Valuator::value\(\)](#).

Referenced by [Fl\\_Scroll::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Help\\_View::Fl\\_Help\\_View\(\)](#), [handle\(\)](#), [Fl\\_Help\\_View::leftline\(\)](#), [Fl\\_Help\\_View::topline\(\)](#), and [Fl\\_Text\\_Display::v\\_scrollbar\\_cb\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Scrollbar.H](#)
- [Fl\\_Scrollbar.cxx](#)

## 30.79 Fl\_Secret\_Input Class Reference

The [Fl\\_Secret\\_Input](#) class is a subclass of [Fl\\_Input](#) that displays its input as a string of asterisks.

```
#include <Fl_Secret_Input.H>
```

Inheritance diagram for Fl\_Secret\_Input::



### Public Member Functions

- [Fl\\_Secret\\_Input](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Secret\\_Input](#) widget using the given position, size, and label string.*

### 30.79.1 Detailed Description

The [Fl\\_Secret\\_Input](#) class is a subclass of [Fl\\_Input](#) that displays its input as a string of asterisks.

This subclass is usually used to receive passwords and other "secret" information.

### 30.79.2 Constructor & Destructor Documentation

#### 30.79.2.1 [Fl\\_Secret\\_Input::Fl\\_Secret\\_Input](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Secret\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

Inherited destructor destroys the widget and any value associated with it.

References [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl\\_Secret\\_Input.H](#)

## 30.80 Fl\_Select\_Browser Class Reference

The class is a subclass of [Fl\\_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

```
#include <Fl_Select_Browser.h>
```

Inheritance diagram for Fl\_Select\_Browser::

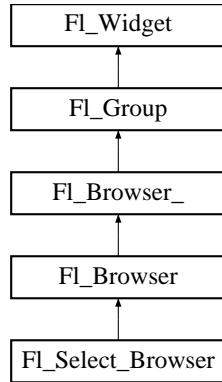

### Public Member Functions

- [Fl\\_Select\\_Browser](#) (int X, int Y, int W, int H, const char \*l=0)

*Creates a new [Fl\\_Select\\_Browser](#) widget using the given position, size, and label string.*

### 30.80.1 Detailed Description

The class is a subclass of [Fl\\_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

As long as the mouse button is held down on an unselected item it is highlighted. Normally the callback is done when the user presses the mouse, but you can change this with [when\(\)](#).

See [Fl\\_Browser](#) for methods to add and remove lines from the browser.

### 30.80.2 Constructor & Destructor Documentation

#### 30.80.2.1 [Fl\\_Select\\_Browser::Fl\\_Select\\_Browser](#) (int X, int Y, int W, int H, const char \* l = 0) [inline]

*Creates a new [Fl\\_Select\\_Browser](#) widget using the given position, size, and label string.*

The default boxtyle is `FL_DOWN_BOX`. The constructor specializes [Fl\\_Browser\(\)](#) by setting the type to `FL_SELECT_BROWSER`. The destructor destroys the widget and frees all memory that has been allocated.

References `FL_SELECT_BROWSER`, and [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl\\_Select\\_Browser.H](#)

## 30.81 Fl\_Shared\_Image Class Reference

This class supports caching, loading, and drawing of image files.

```
#include <Fl_Shared_Image.H>
```

Inheritance diagram for Fl\_Shared\_Image::



### Public Member Functions

- `const char * name ()`  
*Returns the filename of the shared image.*
- `int refcount ()`  
*Returns the number of references of this shared image.*
- `void release ()`  
*Releases and possibly destroys (if refcount <=0) a shared image.*
- `void reload ()`  
*Reloads the shared image from disk.*
- `virtual Fl_Image * copy (int W, int H)`  
*The `copy()` method creates a copy of the specified image.*
- `Fl_Image * copy ()`  
*The `copy()` method creates a copy of the specified image.*
- `virtual void color_average (Fl_Color c, float i)`  
*The `color_average()` method averages the colors in the image with the FLTK color value `c`.*
- `virtual void desaturate ()`  
*The `desaturate()` method converts an image to grayscale.*
- `virtual void draw (int X, int Y, int W, int H, int cx, int cy)`  
*The `draw()` methods draw the image.*
- `void draw (int X, int Y)`  
*The `draw()` methods draw the image.*
- `virtual void uncache ()`  
*If the image has been cached for display, delete the cache data.*

## Static Public Member Functions

- static [Fl\\_Shared\\_Image](#) \* **find** (const char \*n, int W=0, int H=0)  
*Finds a shared image from its named and size specifications.*
- static [Fl\\_Shared\\_Image](#) \* **get** (const char \*n, int W=0, int H=0)  
*Gets a shared image, if it exists already ; it will return it.*
- static [Fl\\_Shared\\_Image](#) \*\* **images** ()  
*Returns the Fl\_Shared\_Image\* array.*
- static int **num\_images** ()  
*Returns the total number of shared images in the array.*
- static void **add\_handler** (Fl\_Shared\_Handler f)  
*Adds a shared image handler, which is basically a test function for adding new formats.*
- static void **remove\_handler** (Fl\_Shared\_Handler f)  
*Removes a shared image handler.*

## Protected Member Functions

- [Fl\\_Shared\\_Image](#) ()  
*Creates an empty shared image.*
- [Fl\\_Shared\\_Image](#) (const char \*n, [Fl\\_Image](#) \*img=0)  
*Creates a shared image from its filename and its corresponding Fl\_Image\* img.*
- virtual ~[Fl\\_Shared\\_Image](#) ()  
*The destructor free all memory and server resources that are used by the image.*
- void **add** ()
- void **update** ()

## Static Protected Member Functions

- static int **compare** ([Fl\\_Shared\\_Image](#) \*\*i0, [Fl\\_Shared\\_Image](#) \*\*i1)

## Protected Attributes

- const char \* **name\_**
- int **original\_**
- int **refcount\_**
- [Fl\\_Image](#) \* **image\_**
- int **alloc\_image\_**

## Static Protected Attributes

- static `Fl_Shared_Image ** images_ = 0`
- static int `num_images_ = 0`
- static int `alloc_images_ = 0`
- static `Fl_Shared_Handler * handlers_ = 0`
- static int `num_handlers_ = 0`
- static int `alloc_handlers_ = 0`

### 30.81.1 Detailed Description

This class supports caching, loading, and drawing of image files.

Most applications will also want to link against the fltk\_images library and call the `fl_register_images()` function to support standard image formats such as BMP, GIF, JPEG, and PNG.

### 30.81.2 Constructor & Destructor Documentation

#### 30.81.2.1 `Fl_Shared_Image::Fl_Shared_Image ()` [protected]

Creates an empty shared image.

The constructors create a new shared image record in the image cache.

The constructors are protected and cannot be used directly from a program. Use the `get()` method instead.

Referenced by `copy()`, `find()`, and `get()`.

#### 30.81.2.2 `Fl_Shared_Image::Fl_Shared_Image (const char * n, Fl_Image * img = 0)` [protected]

Creates a shared image from its filename and its corresponding `Fl_Image*` img.

The constructors create a new shared image record in the image cache.

The constructors are protected and cannot be used directly from a program. Use the `get()` method instead.

References `reload()`.

#### 30.81.2.3 `Fl_Shared_Image::~Fl_Shared_Image ()` [protected, virtual]

The destructor free all memory and server resources that are used by the image.

The destructor is protected and cannot be used directly from a program. Use the `Fl_Shared_Image::release()` method instead.

### 30.81.3 Member Function Documentation

#### 30.81.3.1 `void Fl_Shared_Image::color_average (Fl_Color c, float i)` [virtual]

The `color_average()` method averages the colors in the image with the FLTK color value c.

The *i* argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::color\\_average\(\)](#).

### 30.81.3.2 Fl\_Image\* Fl\_Shared\_Image::copy () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [copy\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [copy\(\)](#).

### 30.81.3.3 Fl\_Image \* Fl\_Shared\_Image::copy (int *W*, int *H*) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [alloc\\_image\\_](#), [Fl\\_Image::copy\(\)](#), [Fl\\_Shared\\_Image\(\)](#), [image\\_](#), [name\\_](#), [refcount\\_](#), and [update\(\)](#).

Referenced by [get\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

### 30.81.3.4 void Fl\_Shared\_Image::desaturate () [virtual]

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::desaturate\(\)](#).

### 30.81.3.5 void Fl\_Shared\_Image::draw (int *X*, int *Y*) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl\\_Image](#).

References [draw\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [draw\(\)](#).

**30.81.3.6 void Fl\_Shared\_Image::draw (int X, int Y, int W, int H, int cx, int cy) [virtual]**

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::draw\(\)](#).

**30.81.3.7 Fl\_Shared\_Image \* Fl\_Shared\_Image::get (const char \* n, int W = 0, int H = 0) [static]**

Gets a shared image, if it exists already ; it will return it.

If it does not exist or if it exist but with other size, then the existing image is deleted and replaced by a new image from the n filename of the proper dimension. If n is not a valid image filename, then [get\(\)](#) will return NULL.

References [add\(\)](#), [copy\(\)](#), [find\(\)](#), [Fl\\_Shared\\_Image\(\)](#), [Fl\\_Image::h\(\)](#), [image\\_](#), and [Fl\\_Image::w\(\)](#).

Referenced by [Fl\\_File\\_Icon::load\\_image\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

**30.81.3.8 int Fl\_Shared\_Image::num\_images () [static]**

Returns the total number of shared images in the array.

**30.81.3.9 int Fl\_Shared\_Image::refcount () [inline]**

Returns the number of references of this shared image.

When reference is below 1, the image is deleted.

**30.81.3.10 void Fl\_Shared\_Image::release ()**

Releases and possibly destroys (if refcount <=0) a shared image.

In the latter case, it will reorganize the shared image array so that no hole will occur.

Referenced by [Fl\\_File\\_Icon::load\\_image\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

**30.81.3.11 void Fl\_Shared\_Image::uncache () [virtual]**

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::uncache\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Shared\\_Image.H](#)
- [Fl\\_Shared\\_Image.cxx](#)

## 30.82 Fl\_Simple\_Counter Class Reference

This widget creates a counter with only 2 arrow buttons.

```
#include <Fl_Simple_Counter.h>
```

Inheritance diagram for Fl\_Simple\_Counter::



### Public Member Functions

- **Fl\_Simple\_Counter** (int x, int y, int w, int h, const char \*l=0)

#### 30.82.1 Detailed Description

This widget creates a counter with only 2 arrow buttons.

Figure 30.28: Fl\_Simple\_Counter

The documentation for this class was generated from the following file:


- [Fl\\_Simple\\_Counter.H](#)

## 30.83 Fl\_Single\_Window Class Reference

This is the same as [Fl\\_Window](#).

```
#include <Fl_Single_Window.H>
```

Inheritance diagram for Fl\_Single\_Window::

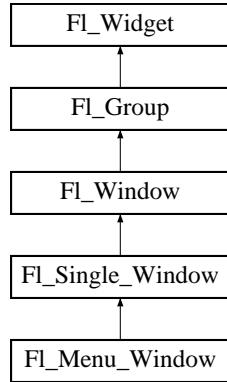

### Public Member Functions

- void [show \(\)](#)

*Put the window on the screen.*

- void [show \(int a, char \\*\\*b\)](#)

*See virtual void [Fl\\_Window::show\(\)](#).*

- void [flush \(\)](#)

*Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).*

- [Fl\\_Single\\_Window \(int W, int H, const char \\*l=0\)](#)

*Creates a new [Fl\\_Single\\_Window](#) widget using the given size, and label (title) string.*

- [Fl\\_Single\\_Window \(int X, int Y, int W, int H, const char \\*l=0\)](#)

*Creates a new [Fl\\_Single\\_Window](#) widget using the given position, size, and label (title) string.*

- int [make\\_current \(\)](#)

*Sets things up so that the drawing functions in <[FL/fl\\_draw.H](#)> will go into this window.*

### 30.83.1 Detailed Description

This is the same as [Fl\\_Window](#).

However, it is possible that some implementations will provide double-buffered windows by default. This can be used to force single-buffering. This may be useful for modifying existing programs that use incremental update, or for some types of image data, such as a movie flipbook.

### 30.83.2 Member Function Documentation

#### 30.83.2.1 void Fl\_Single\_Window::flush () [virtual]

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

Reimplemented from [Fl\\_Window](#).

Reimplemented in [Fl\\_Menu\\_Window](#).

#### 30.83.2.2 int Fl\_Single\_Window::make\_current ()

Sets things up so that the drawing functions in <[FL/fl\\_draw.H](#)> will go into this window.

This is useful for incremental update of windows, such as in an idle callback, which will make your program behave much better if it draws a slow graphic. **Danger: incremental update is very hard to debug and maintain!**

This method only works for the [Fl\\_Window](#) and [Fl\\_Gl\\_Window](#) derived classes.

Reimplemented from [Fl\\_Window](#).

#### 30.83.2.3 void Fl\_Single\_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl\\_Window](#).

Reimplemented in [Fl\\_Menu\\_Window](#).

The documentation for this class was generated from the following files:


- [Fl\\_Single\\_Window.H](#)
- [Fl\\_Single\\_Window.cxx](#)

## 30.84 Fl\_Slider Class Reference

The [Fl\\_Slider](#) widget contains a sliding knob inside a box.

```
#include <Fl_Slider.h>
```

Inheritance diagram for Fl\_Slider::

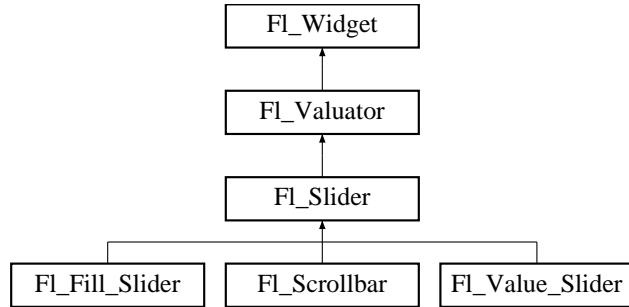

### Public Member Functions

- void [draw\(\)](#)  
*Draw the widget.*
- int [handle\(int\)](#)  
*Handles the specified event.*
- [Fl\\_Slider\(int x, int y, int w, int h, const char \\*l=0\)](#)  
*Creates a new [Fl\\_Slider](#) widget using the given position, size, and label string.*
- [Fl\\_Slider\(uchar t, int x, int y, int w, int h, const char \\*l\)](#)  
*Creates a new [Fl\\_Slider](#) widget using the given position, size, and label string.*
- int [scrollvalue\(int windowtop, int windowsize, int first, int totalsize\)](#)  
*Returns [Fl\\_Scrollbar::value\(\)](#).*
- void [bounds\(double a, double b\)](#)  
*Sets the minimum (a) and maximum (b) values for the valuator widget.*
- float [slider\\_size\(\) const](#)  
*Get or set the dimensions of the moving piece of slider.*
- void [slider\\_size\(double v\)](#)  
*See float [slider\\_size\(\) const](#).*
- [Fl\\_Boxtype slider\(\) const](#)  
*Gets the slider box type.*
- void [slider\(Fl\\_Boxtype c\)](#)  
*Sets the slider box type.*

## Protected Member Functions

- void **draw** (int, int, int, int)
- int **handle** (int, int, int, int)

### 30.84.1 Detailed Description

The [Fl\\_Slider](#) widget contains a sliding knob inside a box.

It is often used as a scrollbar. Moving the box all the way to the top/left sets it to the [minimum\(\)](#), and to the bottom/right to the [maximum\(\)](#). The [minimum\(\)](#) may be greater than the [maximum\(\)](#) to reverse the slider direction.

Use void [Fl\\_Widget::type\(int\)](#) to set how the slider is drawn, which can be one of the following:

- FL\_VERTICAL - Draws a vertical slider (this is the default).
- FL\_HORIZONTAL - Draws a horizontal slider.
- FL\_VERT\_FILL\_SLIDER - Draws a filled vertical slider, useful as a progress or value meter.
- FL\_HOR\_FILL\_SLIDER - Draws a filled horizontal slider, useful as a progress or value meter.
- FL\_VERT\_NICE\_SLIDER - Draws a vertical slider with a nice looking control knob.
- FL\_HOR\_NICE\_SLIDER - Draws a horizontal slider with a nice looking control knob.

Figure 30.29: Fl\_Slider

### 30.84.2 Constructor & Destructor Documentation

#### 30.84.2.1 [Fl\\_Slider::Fl\\_Slider \(int X, int Y, int W, int H, const char \\*l = 0\)](#)

Creates a new [Fl\\_Slider](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_DOWN\\_BOX](#).

References [Fl\\_Widget::box\(\)](#), and [FL\\_DOWN\\_BOX](#).

### 30.84.2.2 `Fl_Slider::Fl_Slider (uchar t, int X, int Y, int W, int H, const char * l)`

Creates a new [Fl\\_Slider](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`.

References `Fl_Widget::box()`, `FL_DOWN_BOX`, `FL_FLAT_BOX`, and `Fl_Widget::type()`.

## 30.84.3 Member Function Documentation

### 30.84.3.1 `void Fl_Slider::bounds (double a, double b)`

Sets the minimum (*a*) and maximum (*b*) values for the valuator widget.

If at least one of the values is changed, a partial redraw is asked.

Reimplemented from [Fl\\_Valuator](#).

References `Fl_Widget::damage()`, `Fl_Valuator::maximum()`, and `Fl_Valuator::minimum()`.

Referenced by `scrollvalue()`.

### 30.84.3.2 `void Fl_Slider::draw () [virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

Reimplemented in [Fl\\_Scrollbar](#), and [Fl\\_Value\\_Slider](#).

References `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `Fl_Widget::h()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.84.3.3 `int Fl_Slider::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited handle() method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

$\leftarrow$  *event* the kind of event received

#### Return values:

0 if the event was not used or understood

*I* if the event was used and can be deleted

See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Scrollbar](#), and [Fl\\_Value\\_Slider](#).

References [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [FL\\_PUSH](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::redraw\(\)](#), [Fl::visible\\_focus\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.84.3.4 int Fl\_Slider::scrollvalue (int *p*, int *W*, int *t*, int *l*)

Returns [Fl\\_Scrollbar::value\(\)](#).

References [bounds\(\)](#), [slider\\_size\(\)](#), [Fl\\_Valuator::step\(\)](#), and [Fl\\_Valuator::value\(\)](#).

Referenced by [Fl\\_Scrollbar::value\(\)](#).

#### 30.84.3.5 void Fl\_Slider::slider (Fl\_Boxtype *c*) [inline]

Sets the slider box type.

#### 30.84.3.6 Fl\_Boxtype Fl\_Slider::slider () const [inline]

Gets the slider box type.

Referenced by [Fl\\_Scrollbar::draw\(\)](#), and [Fl\\_Scrollbar::Fl\\_Scrollbar\(\)](#).

#### 30.84.3.7 void Fl\_Slider::slider\_size (double *v*)

See float [slider\\_size\(\)](#) const.

See float [Fl\\_Slider::slider\\_size\(\)](#) const.

References [Fl\\_Widget::damage\(\)](#).

#### 30.84.3.8 float Fl\_Slider::slider\_size () const [inline]

Get or set the dimensions of the moving piece of slider.

This is the fraction of the size of the entire widget. If you set this to 1 then the slider cannot move. The default value is .08.

For the "fill" sliders this is the size of the area around the end that causes a drag effect rather than causing the slider to jump to the mouse.

Referenced by [Fl\\_Scrollbar::handle\(\)](#), and [scrollvalue\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Slider.H](#)
- [Fl\\_Slider.cxx](#)

## 30.85 Fl\_Spinner Class Reference

This widget is a combination of the input widget and repeat buttons.

```
#include <Fl_Spinner.H>
```

Inheritance diagram for Fl\_Spinner::



### Public Member Functions

- **Fl\_Spinner** (int X, int Y, int W, int H, const char \*L=0)

*Creates a new **Fl\_Spinner** widget using the given position, size, and label string.*

- const char \* **format** ()

*Sets or returns the format string for the value.*

- void **format** (const char \*f)

*Sets or returns the format string for the value.*

- int **handle** (int event)

*Handles the specified event.*

- double **maximum** () const

*Speling mistakes retained for source compatibility.*

- double **maximum** () const

*Gets the maximum value of the widget.*

- void **maximum** (double m)

*Sets the maximum value of the widget.*

- double **minimum** () const

*Speling mistakes retained for source compatibility.*

- double **minimum** () const

*Gets the minimum value of the widget.*

- void **minimum** (double m)

*Sets the minimum value of the widget.*

- void **range** (double a, double b)

*Sets the minimum and maximum values for the widget.*

- void **resize** (int X, int Y, int W, int H)

*This resizes the [Fl\\_Group](#) widget and all of its children.*

- double **step** () const

*Sets or returns the amount to change the value when the user clicks a button.*

- void **step** (double s)

*See double [Fl\\_Spinner::step\(\)](#) const.*

- [Fl\\_Color](#) **textcolor** () const

*Gets the color of the text in the input field.*

- void **textcolor** ([Fl\\_Color](#) c)

*Sets the color of the text in the input field.*

- [Fl\\_Font](#) **textfont** () const

*Gets the font of the text in the input field.*

- void **textfont** ([Fl\\_Font](#) f)

*Sets the font of the text in the input field.*

- [Fl\\_Fontsize](#) **textsize** () const

*Gets the size of the text in the input field.*

- void **textsize** ([Fl\\_Fontsize](#) s)

*Sets the size of the text in the input field.*

- [uchar](#) **type** () const

*Sets or Gets the numeric representation in the input field.*

- void **type** ([uchar](#) v)

*See uchar [Fl\\_Spinner::type\(\)](#) const.*

- double **value** () const

*Gets the current value of the widget.*

- void **value** (double v)

*Sets the current value of the widget.*

### 30.85.1 Detailed Description

This widget is a combination of the input widget and repeat buttons.

The user can either type into the input area or use the buttons to change the value.

## 30.85.2 Constructor & Destructor Documentation

### 30.85.2.1 `Fl_Spinner::Fl_Spinner (int X, int Y, int W, int H, const char *L = 0)` [inline]

Creates a new `Fl_Spinner` widget using the given position, size, and label string.

Inherited destructor Destroys the widget and any value associated with it.

References `Fl_Widget::align()`, `Fl_Widget::callback()`, `Fl_Group::end()`, `FL_ALIGN_LEFT`, `FL_WHEN_ENTER_KEY`, `FL_WHEN_RELEASE`, `Fl_Widget::type()`, `Fl_Input_::value()`, and `Fl_Widget::when()`.

## 30.85.3 Member Function Documentation

### 30.85.3.1 `void Fl_Spinner::format (const char *f)` [inline]

Sets or returns the format string for the value.

### 30.85.3.2 `const char* Fl_Spinner::format ()` [inline]

Sets or returns the format string for the value.

Referenced by `type()`.

### 30.85.3.3 `int Fl_Spinner::handle (int event)` [inline, virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

$\leftarrow$  `event` the kind of event received

#### Return values:

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from `Fl_Group`.

References `Fl_Widget::do_callback()`, `Fl::event_key()`, `FL_Down`, `FL_FOCUS`, `FL_KEYDOWN`, `FL_SHORTCUT`, `FL_Up`, and `Fl_Widget::take_focus()`.

### 30.85.3.4 `void Fl_Spinner::maximum (double m)` [inline]

Sets the maximum value of the widget.

**30.85.3.5 double Fl\_Spinner::maximum () const [inline]**

Gets the maximum value of the widget.

**30.85.3.6 double Fl\_Spinner::maximum () const [inline]**

Speling mistakes retained for source compatibility.

**Deprecated****30.85.3.7 void Fl\_Spinner::minimum (double *m*) [inline]**

Sets the minimum value of the widget.

**30.85.3.8 double Fl\_Spinner::minimum () const [inline]**

Gets the minimum value of the widget.

**30.85.3.9 double Fl\_Spinner::mininum () const [inline]**

Speling mistakes retained for source compatibility.

**Deprecated****30.85.3.10 void Fl\_Spinner::range (double *a*, double *b*) [inline]**

Sets the minimum and maximum values for the widget.

**30.85.3.11 void Fl\_Spinner::resize (int *X*, int *Y*, int *W*, int *H*) [inline, virtual]**

This resizes the [Fl\\_Group](#) widget and all of its children.

The [Fl\\_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for [Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)

**See also:**

[Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)  
[Fl\\_Group::resizable\(\)](#)  
[Fl\\_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Widget::resize\(\)](#), and [Fl\\_Input\\_::resize\(\)](#).

**30.85.3.12 double Fl\_Spinner::step () const [inline]**

Sets or returns the amount to change the value when the user clicks a button.

Before setting step to a non-integer value, the spinner [type\(\)](#) should be changed to floating point.

**30.85.3.13 void Fl\_Spinner::textcolor (Fl\_Color c) [inline]**

Sets the color of the text in the input field.

References [Fl\\_Input\\_::textcolor\(\)](#).

**30.85.3.14 Fl\_Color Fl\_Spinner::textcolor () const [inline]**

Gets the color of the text in the input field.

References [Fl\\_Input\\_::textcolor\(\)](#).

**30.85.3.15 void Fl\_Spinner::textfont (Fl\_Font f) [inline]**

Sets the font of the text in the input field.

References [Fl\\_Input\\_::textfont\(\)](#).

**30.85.3.16 Fl\_Font Fl\_Spinner::textfont () const [inline]**

Gets the font of the text in the input field.

References [Fl\\_Input\\_::textfont\(\)](#).

**30.85.3.17 void Fl\_Spinner::textsize (Fl\_Fontsize s) [inline]**

Sets the size of the text in the input field.

References [Fl\\_Input\\_::textsize\(\)](#).

**30.85.3.18 Fl\_Fontsize Fl\_Spinner::textsize () const [inline]**

Gets the size of the text in the input field.

References [Fl\\_Input\\_::textsize\(\)](#).

**30.85.3.19 uchar Fl\_Spinner::type () const [inline]**

Sets or Gets the numeric representation in the input field.

Valid values are FL\_INT\_INPUT and FL\_FLOAT\_INPUT. The first form also changes the [format\(\)](#) template. Setting a new spinner type via a superclass pointer will not work.

**Note:**

`type` is not a virtual function.

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::type\(\)](#).

### 30.85.3.20 void Fl\_Spinner::value (double v) [inline]

Sets the current value of the widget.

Before setting value to a non-integer value, the spinner [type\(\)](#) should be changed to floating point.

### 30.85.3.21 double Fl\_Spinner::value () const [inline]

Gets the current value of the widget.

The documentation for this class was generated from the following file:


- [Fl\\_Spinner.H](#)

## 30.86 Fl\_Tabs Class Reference

The [Fl\\_Tabs](#) widget is the "file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits.

```
#include <Fl_Tabs.h>
```

Inheritance diagram for Fl\_Tabs::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Widget](#) \* [value](#) ()  
*Gets the currently visible widget/tab.*
- int [value](#) ([Fl\\_Widget](#) \*)  
*Sets the widget to become the current visible widget/tab.*
- [Fl\\_Widget](#) \* [push](#) () const
- int [push](#) ([Fl\\_Widget](#) \*)
- [Fl\\_Tabs](#) (int, int, int, int, const char \*=0)  
*Creates a new [Fl\\_Tabs](#) widget using the given position, size, and label string.*
- [Fl\\_Widget](#) \* [which](#) (int event\_x, int event\_y)

### Protected Member Functions

- void [redraw\\_tabs](#) ()
- void [draw](#) ()  
*Draw the widget.*

### 30.86.1 Detailed Description

The [Fl\\_Tabs](#) widget is the "file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits.



Figure 30.30: Fl\_Tabs

Clicking the tab makes a child [visible\(\)](#) by calling [show\(\)](#) on it, and all other children are made invisible by calling [hide\(\)](#) on them. Usually the children are [Fl\\_Group](#) widgets containing several widgets themselves.

Each child makes a card, and it's [label\(\)](#) is printed on the card tab, including the label font and style. The selection color of that child is used to color the tab, while the color of the child determines the background color of the pane.

The size of the tabs is controlled by the bounding box of the children (there should be some space between the children and the edge of the [Fl\\_Tabs](#)), and the tabs may be placed "inverted" on the bottom, this is determined by which gap is larger. It is easiest to lay this out in fluid, using the fluid browser to select each child group and resize them until the tabs look the way you want them to.

## 30.86.2 Constructor & Destructor Documentation

### 30.86.2.1 [Fl\\_Tabs::Fl\\_Tabs \(int X, int Y, int W, int H, const char \\* l = 0\)](#)

Creates a new [Fl\\_Tabs](#) widget using the given position, size, and label string.

The default boxtyle is [FL\\_THIN\\_UP\\_BOX](#).

Use [add\(Fl\\_Widget\)](#) to add each child, which are usually [Fl\\_Group](#) widgets. The children should be sized to stay away from the top or bottom edge of the [Fl\\_Tabs](#) widget, which is where the tabs will be drawn.

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl\\_Tabs](#) and all of its children can be automatic (local) variables, but you must declare the [Fl\\_Tabs](#) widget *first* so that it is

destroyed last.

References [Fl\\_Widget::box\(\)](#), and [FL\\_THIN\\_UP\\_BOX](#).

### 30.86.3 Member Function Documentation

#### 30.86.3.1 void Fl\_Tabs::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Group::array\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl\\_Group::children\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [Fl\\_Group::draw\\_child\(\)](#), [fl\\_pop\\_clip\(\)](#), [fl\\_push\\_clip\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [Fl\\_Group::update\\_child\(\)](#), [value\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.86.3.2 int Fl\_Tabs::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

$\leftarrow$  *event* the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Group](#).

References [Fl\\_Group::child\(\)](#), [Fl\\_Group::children\(\)](#), [Fl\\_Group::current\(\)](#), [Fl\\_Widget::do\\_callback\(\)](#), [Fl::event\(\)](#), [Fl::event\\_key\(\)](#), [Fl::event\\_x\(\)](#), [Fl::event\\_y\(\)](#), [FL\\_Down](#), [FL\\_DRAG](#), [FL\\_FOCUS](#), [FL\\_KEYBOARD](#), [FL\\_Left](#), [FL\\_MOVE](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [FL\\_Right](#), [FL\\_SHORTCUT](#), [FL\\_SHOW](#), [FL\\_UNFOCUS](#), [Fl\\_Group::focus\(\)](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Widget::label\(\)](#), [Fl\\_Widget::redraw\(\)](#), [Fl\\_Widget::set\\_changed\(\)](#), [Fl\\_Widget::test\\_shortcut\(\)](#), [value\(\)](#), [Fl\\_Widget::visible\(\)](#), [Fl::visible\\_focus\(\)](#), and [Fl\\_Widget::y\(\)](#).

**30.86.3.3 int Fl\_Tabs::value (Fl\_Widget \* *newvalue*)**

Sets the widget to become the current visible widget/tab.

Setting the value hides all other children, and makes this one visible, if it is really a child.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::hide()`, `Fl_Widget::show()`, and `Fl_Widget::visible()`.

**30.86.3.4 Fl\_Widget \* Fl\_Tabs::value ()**

Gets the currently visible widget/tab.

The `value()` is the first visible child (or the last child if none are visible) and this also hides any other children. This allows the tabs to be deleted, moved to other groups, and `show()/hide()` called without it screwing up.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::hide()`, `Fl_Widget::show()`, and `Fl_Widget::visible()`.

Referenced by `draw()`, and `handle()`.

The documentation for this class was generated from the following files:

- [Fl\\_Tabs.H](#)
- [Fl\\_Tabs.cxx](#)

## 30.87 Fl\_Text\_Buffer Class Reference

The `Fl_Text_Buffer` class is used by the `Fl_Text_Display` and `Fl_Text_Editor` to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

```
#include <Fl_Text_Buffer.h>
```

### Public Member Functions

- `Fl_Text_Buffer` (int requestedSize=0)  
*Create an empty text buffer of a pre-determined size (use this to avoid unnecessary re-allocation if you know exactly how much the buffer will need to hold.*
- `~Fl_Text_Buffer` ()  
*Frees a text buffer.*
- `int length ()`  
*Returns the number of characters in the buffer.*
- `char * text ()`  
*Get the entire contents of a text buffer.*
- `void text (const char *text)`  
*Replaces the entire contents of the text buffer.*
- `char * text_range (int start, int end)`  
*Return a copy of the text between start and end character positions from text buffer buf.*
- `char character (int pos)`  
*Returns the character at the specified position pos in the buffer.*
- `char * text_in_rectangle (int start, int end, int rectStart, int rectEnd)`  
*Returns the text from the given rectangle.*
- `void insert (int pos, const char *text)`  
*Inserts null-terminated string text at position pos.*
- `void append (const char *t)`  
*Appends the text string to the end of the buffer.*
- `void remove (int start, int end)`  
*Deletes a range of characters in the buffer.*
- `void replace (int start, int end, const char *text)`  
*Deletes the characters between start and end, and inserts the null-terminated string text in their place in the buffer.*
- `void copy (Fl_Text_Buffer *fromBuf, int fromStart, int fromEnd, int toPos)`  
*Copies text from one buffer to this one; fromBuf may be the same as this.*

- int **undo** (int \*cp=0)  
*Undo text modification according to the undo variables or insert text from the undo buffer.*
- void **canUndo** (char flag=1)  
*Lets the undo system know if we can undo changes.*
- int **insertfile** (const char \*file, int pos, int buflen=128 \*1024)  
*Inserts a file at the specified position.*
- int **appendfile** (const char \*file, int buflen=128 \*1024)  
*Appends the named file to the end of the buffer.*
- int **loadfile** (const char \*file, int buflen=128 \*1024)  
*Loads a text file into the buffer.*
- int **outputfile** (const char \*file, int start, int end, int buflen=128 \*1024)  
*Writes the specified portions of the file to a file.*
- int **savefile** (const char \*file, int buflen=128 \*1024)  
*Saves a text file from the current buffer.*
- void **insert\_column** (int column, int startPos, const char \*text, int \*charsInserted, int \*charsDeleted)  
*Insert s columnwise into buffer starting at displayed character position column on the line beginning at startPos.*
- void **replace\_rectangular** (int start, int end, int rectStart, int rectEnd, const char \*text)  
*Replaces a rectangular area in the buffer, given by start, end, rectStart, and rectEnd, with text.*
- void **overlay\_rectangular** (int startPos, int rectStart, int rectEnd, const char \*text, int \*charsInserted, int \*charsDeleted)  
*Overlay text between displayed character positions rectStart and rectEnd on the line beginning at startPos.*
- void **remove\_rectangular** (int start, int end, int rectStart, int rectEnd)  
*Removes a rectangular swath of characters between character positions start and end and horizontal displayed-character offsets rectStart and rectEnd.*
- void **clear\_rectangular** (int start, int end, int rectStart, int rectEnd)  
*Clears text in the specified area.*
- int **tab\_distance** ()  
*Gets the tab width.*
- void **tab\_distance** (int tabDist)  
*Set the hardware tab distance (width) used by all displays for this buffer, and used in computing offsets for rectangular selection operations.*
- void **select** (int start, int end)  
*Selects a range of characters in the buffer.*

- **int selected ()**  
*Returns a non 0 value if text has been selected, 0 otherwise.*
- **void unselect ()**  
*Cancels any previous selection on the primary text selection object.*
- **void select\_rectangular (int start, int end, int rectStart, int rectEnd)**  
*Achieves a rectangular selection on the primary text selection object.*
- **int selection\_position (int \*start, int \*end)**  
*Gets the selection position.*
- **int selection\_position (int \*start, int \*end, int \*isRect, int \*rectStart, int \*rectEnd)**  
*Gets the selection position, and rectangular selection info.*
- **char \* selection\_text ()**  
*Returns the currently selected text.*
- **void remove\_selection ()**  
*Removes the text in the primary selection.*
- **void replace\_selection (const char \*text)**  
*Replaces the text in the primary selection.*
- **void secondary\_select (int start, int end)**  
*Selects a range of characters in the secondary selection.*
- **int secondary\_selected ()**  
*Returns a non 0 value if text has been selected in the secondary text selection, 0 otherwise.*
- **void secondary\_unselect ()**  
*Clears any selection in the secondary text selection object.*
- **void secondary\_select\_rectangular (int start, int end, int rectStart, int rectEnd)**  
*Achieves a rectangular selection on the secondary text selection object.*
- **int secondary\_selection\_position (int \*start, int \*end)**  
*Returns the current selection in the secondary text selection object.*
- **int secondary\_selection\_position (int \*start, int \*end, int \*isRect, int \*rectStart, int \*rectEnd)**  
*Returns the current selection in the secondary text selection object.*
- **char \* secondary\_selection\_text ()**  
*Returns the text in the secondary selection.*
- **void remove\_secondary\_selection ()**  
*Removes the text from the buffer corresponding to the secondary text selection object.*
- **void replace\_secondary\_selection (const char \*text)**

*Replaces the text from the buffer corresponding to the secondary text selection object with the new string text.*

- void [highlight](#) (int start, int end)  
*Highlights the specified text within the buffer.*
- int [highlight](#) ()  
*Returns the highlighted text.*
- void [unhighlight](#) ()  
*Unhighlights text in the buffer.*
- void [highlight\\_rectangular](#) (int start, int end, int rectStart, int rectEnd)  
*Highlights a rectangular selection in the buffer.*
- int [highlight\\_position](#) (int \*start, int \*end)  
*Highlights the specified text between start and end within the buffer.*
- int [highlight\\_position](#) (int \*start, int \*end, int \*isRect, int \*rectStart, int \*rectEnd)  
*Highlights the specified rectangle of text within the buffer.*
- char \* [highlight\\_text](#) ()  
*Returns the highlighted text.*
- void [add\\_modify\\_callback](#) (Fl\_Text\_Modify\_Cb bufModifiedCB, void \*cbArg)  
*Adds a callback function that is called whenever the text buffer is modified.*
- void [remove\\_modify\\_callback](#) (Fl\_Text\_Modify\_Cb bufModifiedCB, void \*cbArg)  
*Removes a modify callback.*
- void [call\\_modify\\_callbacks](#) ()  
*Calls all modify callbacks that have been registered using the [add\\_modify\\_callback\(\)](#) method.*
- void [add\\_pdelete\\_callback](#) (Fl\_Text\_Predel\_Cb bufPredelCB, void \*cbArg)  
*Adds a callback routine to be called before text is deleted from the buffer.*
- void [remove\\_pdelete\\_callback](#) (Fl\_Text\_Predel\_Cb predelCB, void \*cbArg)  
*Removes a callback routine bufPreDeleteCB associated with argument cbArg to be called before text is deleted from the buffer.*
- void [call\\_pdelete\\_callbacks](#) ()  
*Calls the stored pre-delete callback procedure(s) for this buffer to update the changed area(s) on the screen and any other listeners.*
- char \* [line\\_text](#) (int pos)  
*Returns the text from the entire line containing the specified character position.*
- int [line\\_start](#) (int pos)  
*Returns the position of the start of the line containing position pos.*

- int **line\_end** (int pos)  
*Finds and returns the position of the end of the line containing position pos (which is either a pointer to the newline character ending the line, or a pointer to one character beyond the end of the buffer).*
- int **word\_start** (int pos)  
*Returns the position corresponding to the start of the word.*
- int **word\_end** (int pos)  
*Returns the position corresponding to the end of the word.*
- int **expand\_character** (int pos, int indent, char \*outStr)  
*Expands the given character to a displayable format.*
- int **count\_displayed\_characters** (int lineStartPos, int targetPos)  
*Count the number of displayed characters between buffer position lineStartPos and targetPos.*
- int **skip\_displayed\_characters** (int lineStartPos, int nChars)  
*Count forward from buffer position startPos in displayed characters (displayed characters are the characters shown on the screen to represent characters in the buffer, where tabs and control characters are expanded).*
- int **count\_lines** (int startPos, int endPos)  
*Counts the number of newlines between startPos and endPos in buffer.*
- int **skip\_lines** (int startPos, int nLines)  
*Finds the first character of the line nLines forward from startPos in the buffer and returns its position.*
- int **rewind\_lines** (int startPos, int nLines)  
*Finds and returns the position of the first character of the line nLines backwards from startPos (not counting the character pointed to by startPos if that is a newline) in the buffer.*
- int **findchar\_forward** (int startPos, char searchChar, int \*foundPos)  
*Finds the next occurrence of the specified character.*
- int **findchar\_backward** (int startPos, char searchChar, int \*foundPos)  
*Search backwards in buffer buf for character searchChar, starting with the character BEFORE startPos, returning the result in foundPos returns 1 if found, 0 if not.*
- int **findchars\_forward** (int startPos, const char \*searchChars, int \*foundPos)  
*Finds the next occurrence of the specified characters.*
- int **findchars\_backward** (int startPos, const char \*searchChars, int \*foundPos)  
*Finds the previous occurrence of the specified characters.*
- int **search\_forward** (int startPos, const char \*searchString, int \*foundPos, int matchCase=0)  
*Search forwards in buffer for string searchString, starting with the character startPos, and returning the result in foundPos returns 1 if found, 0 if not.*
- int **search\_backward** (int startPos, const char \*searchString, int \*foundPos, int matchCase=0)  
*Search backwards in buffer for string searchString, starting with the character BEFORE startPos, returning the result in foundPos returns 1 if found, 0 if not.*

- int [substitute\\_null\\_characters](#) (char \*string, int length)

*The primary routine for integrating new text into a text buffer with substitution of another character for ascii nuls.*

- void [unsubstitute\\_null\\_characters](#) (char \*string)

*Converts strings obtained from buffers which contain null characters, which have been substituted for by a special substitution character, back to a null-containing string.*

- char [null\\_substitution\\_character](#) ()

*Returns the current nul substitution character.*

- [Fl\\_Text\\_Selection \\* primary\\_selection](#) ()

*Returns the primary selection.*

- [Fl\\_Text\\_Selection \\* secondary\\_selection](#) ()

*Returns the secondary selection.*

- [Fl\\_Text\\_Selection \\* highlight\\_selection](#) ()

*Returns the current highlight selection.*

## Static Public Member Functions

- static int [expand\\_character](#) (char c, int indent, char \*outStr, int tabDist, char nullSubsChar)

*Expand a single character c from the text buffer into its displayable screen representation (which may be several characters for a tab or a control code).*

- static int [character\\_width](#) (char c, int indent, int tabDist, char nullSubsChar)

*Return the length in displayed characters of character c expanded for display (as discussed above in [expand\\_character\(\)](#) ).*

## Protected Member Functions

- void [call\\_modify\\_callbacks](#) (int pos, int nDeleted, int nInserted, int nRestyled, const char \*deletedText)

*Calls the stored modify callback procedure(s) for this buffer to update the changed area(s) on the screen and any other listeners.*

- void [call\\_preamble\\_callbacks](#) (int pos, int nDeleted)

*Calls the stored pre-delete callback procedure(s) for this buffer to update the changed area(s) on the screen and any other listeners.*

- int [insert\\_](#) (int pos, const char \*text)

*Internal (non-redisplaying) version of BufInsert.*

- void [remove\\_](#) (int start, int end)

*Internal (non-redisplaying) version of BufRemove.*

- void [remove\\_rectangular\\_](#) (int start, int end, int rectStart, int rectEnd, int \*replaceLen, int \*endPos)

*Deletes a rectangle of text without calling the modify callbacks.*

- void [insert\\_column\\_](#) (int column, int startPos, const char \*insText, int \*nDeleted, int \*nInserted, int \*endPos)

*Inserts a column of text without calling the modify callbacks.*

- void [overlay\\_rectangular\\_](#) (int startPos, int rectStart, int rectEnd, const char \*insText, int \*nDeleted, int \*nInserted, int \*endPos)

*Overlay a rectangular area of text without calling the modify callbacks.*

- void [redisplay\\_selection](#) (Fl\_Text\_Selection \*oldSelection, Fl\_Text\_Selection \*newSelection)

*Calls the stored redisplay procedure(s) for this buffer to update the screen for a change in a selection.*

- void [move\\_gap](#) (int pos)

- void [reallocate\\_with\\_gap](#) (int newGapStart, int newGapLen)

*Reallocates the text storage in the buffer to have a gap starting at newGapStart and a gap size of newGapLen, preserving the buffer's current contents.*

- char \* [selection\\_text\\_](#) (Fl\_Text\_Selection \*sel)

- void [remove\\_selection\\_](#) (Fl\_Text\_Selection \*sel)

*Removes the text from the buffer corresponding to sel.*

- void [replace\\_selection\\_](#) (Fl\_Text\_Selection \*sel, const char \*text)

*Replaces the text in selection sel.*

- void [rectangular\\_selection\\_boundaries](#) (int lineStartPos, int rectStart, int rectEnd, int \*selStart, int \*selEnd)

*Finds the first and last character position in a line within a rectangular selection (for copying).*

- void [update\\_selections](#) (int pos, int nDeleted, int nInserted)

*Updates all of the selections in the buffer for changes in the buffer's text.*

## Protected Attributes

- [Fl\\_Text\\_Selection mPrimary](#)

*highlighted areas*

- [Fl\\_Text\\_Selection mSecondary](#)

*highlighted areas*

- [Fl\\_Text\\_Selection mHighlight](#)

*highlighted areas*

- int [mLength](#)

*length of the text in the buffer (the length of the buffer itself must be calculated: gapEnd - gapStart + length)*

- char \* [mBuf](#)

*allocated memory where the text is stored*

- int **mGapStart**  
*points to the first character of the gap*
- int **mGapEnd**  
*points to the first char after the gap*
- int **mTabDist**  
*equiv.*
- int **mUseTabs**  
*True if buffer routines are allowed to use tabs for padding in rectangular operations.*
- int **mNModifyProcs**  
*number of modify-redisplay procs attached*
- Fl\_Text\_Modify\_Cb \* **mNModifyProcs**  
*< procedures to call when buffer is*
- void \*\* **mCbArgs**  
*caller arguments for modifyProcs above*
- int **mNPredeleteProcs**  
*number of pre-delete procs attached*
- Fl\_Text\_Predelete\_Cb \* **mPredeleteProcs**  
*< procedure to call before text is deleted*
- void \*\* **mPredeleteCbArgs**  
*caller argument for pre-delete proc above*
- int **mCursorPosHint**  
*hint for reasonable cursor position after a buffer modification operation*
- char **mNullSubsChar**  
*NEdit is based on C null-terminated strings, so ascii-nul characters must be substituted with something else.*
- char **mCanUndo**  
*if this buffer is used for attributes, it must not do any undo calls*

### 30.87.1 Detailed Description

The **Fl\_Text\_Buffer** class is used by the **Fl\_Text\_Display** and **Fl\_Text\_Editor** to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

The **Fl\_Text\_Buffer** class is used by the **Fl\_Text\_Display** and **Fl\_Text\_Editor** to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

## 30.87.2 Constructor & Destructor Documentation

### 30.87.2.1 `Fl_Text_Buffer::Fl_Text_Buffer (int requestedSize = 0)`

Create an empty text buffer of a pre-determined size (use this to avoid unnecessary re-allocation if you know exactly how much the buffer will need to hold).

Creates a new text buffer of the specified initial size.

References mBuf, mCanUndo, mCbArgs, mCursorPosHint, Fl\_Text\_Selection::mEnd, mGapEnd, mGapStart, mHighlight, mLength, mNModifyProcs, mNodifyProcs, mNPredeleteProcs, mNullSubsChar, mPredeleteCbArgs, mPredeleteProcs, mPrimary, Fl\_Text\_Selection::mRectangular, mSecondary, Fl\_Text\_Selection::mSelected, Fl\_Text\_Selection::mStart, mTabDist, and mUseTabs.

## 30.87.3 Member Function Documentation

### 30.87.3.1 `void Fl_Text_Buffer::add_modify_callback (Fl_Text_Modify_Cb bufModifiedCB, void * cbArg)`

Adds a callback function that is called whenever the text buffer is modified.

The callback function is declared as follows:

```
typedef void (*Fl_Text_Modify_Cb)(int pos, int nInserted, int nDeleted,
                                 int nRestyled, const char* deletedText,
                                 void* cbArg);
```

References mCbArgs, mNModifyProcs, and mNodifyProcs.

Referenced by Fl\_Text\_Display::buffer().

### 30.87.3.2 `void Fl_Text_Buffer::add_predelete_callback (Fl_Text_Predelete_Cb bufPreDeleteCB, void * cbArg)`

Adds a callback routine to be called before text is deleted from the buffer.

References mNPredeleteProcs, mPredeleteCbArgs, and mPredeleteProcs.

### 30.87.3.3 `void Fl_Text_Buffer::append (const char * t) [inline]`

Appends the text string to the end of the buffer.

### 30.87.3.4 `int Fl_Text_Buffer::appendfile (const char *file, int buflen = 128*1024) [inline]`

Appends the named file to the end of the buffer.

Returns 0 on success, non-zero on error (strerror() contains reason). 1 indicates open for read failed (no data loaded). 2 indicates error occurred while reading data (data was partially loaded).

### 30.87.3.5 `char Fl_Text_Buffer::character (int pos)`

Returns the character at the specified position pos in the buffer.

Positions start at 0

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by expand\_character(), Fl\_Text\_Display::find\_wrap\_range(), Fl\_Text\_Display::handle(), Fl\_Text\_Display::in\_selection(), Fl\_Text\_Display::measure\_deleted\_lines(), Fl\_Text\_Display::measure\_proportional\_character(), Fl\_Text\_Display::move\_down(), Fl\_Text\_Display::move\_left(), Fl\_Text\_Display::move\_right(), Fl\_Text\_Display::move\_up(), Fl\_Text\_Display::overstrike(), Fl\_Text\_Display::position\_style(), rectangular\_selection\_boundaries(), Fl\_Text\_Display::redisplay\_range(), search\_backward(), search\_forward(), skip\_displayed\_characters(), word\_end(), word\_start(), Fl\_Text\_Display::wrap\_uses\_character(), and Fl\_Text\_Display::wrapped\_line\_counter().

#### **30.87.3.6 int Fl\_Text\_Buffer::character\_width (char *c*, int *indent*, int *tabDist*, char *nullSubsChar*) [static]**

Return the length in displayed characters of character *c* expanded for display (as discussed above in [expand\\_character\(\)](#) ).

If the buffer for which the character width is being measured is doing null substitution, nullSubsChar should be passed as that character (or nul to ignore).

Referenced by Fl\_Text\_Display::overstrike(), rectangular\_selection\_boundaries(), skip\_displayed\_characters(), and Fl\_Text\_Display::wrapped\_line\_counter().

#### **30.87.3.7 void Fl\_Text\_Buffer::clear\_rectangular (int *start*, int *end*, int *rectStart*, int *rectEnd*)**

Clears text in the specified area.

It clears a rectangular "hole" out of the buffer between character positions start and end and horizontal displayed-character offsets rectStart and rectEnd.

References count\_lines(), and overlay\_rectangular().

#### **30.87.3.8 int Fl\_Text\_Buffer::count\_displayed\_characters (int *lineStartPos*, int *targetPos*)**

Count the number of displayed characters between buffer position *lineStartPos* and *targetPos*.

(displayed characters are the characters shown on the screen to represent characters in the buffer, where tabs and control characters are expanded)

References expand\_character().

Referenced by Fl\_Text\_Display::draw\_vline(), Fl\_Text\_Display::position\_to\_linecol(), Fl\_Text\_Display::wrapped\_column(), and Fl\_Text\_Display::wrapped\_line\_counter().

#### **30.87.3.9 int Fl\_Text\_Buffer::count\_lines (int *startPos*, int *endPos*)**

Counts the number of newlines between *startPos* and *endPos* in buffer.

The character at position *endPos* is not counted.

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by Fl\_Text\_Display::absolute\_top\_line\_number(), Fl\_Text\_Display::buffer\_modified\_cb(), clear\_rectangular(), Fl\_Text\_Display::count\_lines(), Fl\_Text\_Display::position\_to\_linecol(), remove\_rectangular\_(), replace\_rectangular(), and Fl\_Text\_Display::wrapped\_row().

---

**30.87.3.10 int Fl\_Text\_Buffer::expand\_character (char *c*, int *indent*, char \* *outStr*, int *tabDist*, char *nullSubsChar*) [static]**

Expand a single character *c* from the text buffer into it's displayable screen representation (which may be several characters for a tab or a control code).

Returns the number of characters added to *outStr*. *indent* is the number of characters from the start of the line for figuring tabs of length *tabDist*. Output string is guaranteed to be shorter or equal in length to FL\_TEXT\_MAX\_EXP\_CHAR\_LEN Tabs and other control characters are given special treatment. *nullSubsChar* represent the null character to be transformed in <nul>

**30.87.3.11 int Fl\_Text\_Buffer::expand\_character (int *pos*, int *indent*, char \* *outStr*)**

Expands the given character to a displayable format.

Tabs and other control characters are given special treatment. Get a character from the text buffer expanded into its screen representation (which may be several characters for a tab or a control code). Returns the number of characters written to *outStr*. *indent* is the number of characters from the start of the line for figuring tabs. Output string is guranteed to be shorter or equal in length to FL\_TEXT\_MAX\_EXP\_CHAR\_LEN

References character(), mNullSubsChar, and mTabDist.

Referenced by count\_displayed\_characters(), Fl\_Text\_Display::draw\_vline(), Fl\_Text\_Display::measure\_proportional\_character(), Fl\_Text\_Display::position\_to\_xy(), and Fl\_Text\_Display::xy\_to\_position().

**30.87.3.12 int Fl\_Text\_Buffer::findchar\_backward (int *startPos*, char *searchChar*, int \* *foundPos*)**

Search backwards in buffer *buf* for character *searchChar*, starting with the character BEFORE *startPos*, returning the result in *foundPos* returns 1 if found, 0 if not.

(The difference between this and BufSearchBackward is that it's optimized for single characters. The overall performance of the text widget is dependent on its ability to count lines quickly, hence searching for a single character: newline)

References mBuf, mGapEnd, and mLength.

Referenced by line\_start().

**30.87.3.13 int Fl\_Text\_Buffer::findchar\_forward (int *startPos*, char *searchChar*, int \* *foundPos*)**

Finds the next occurrence of the specified character.

Search forwards in buffer for character *searchChar*, starting with the character *startPos*, and returning the result in *foundPos* returns 1 if found, 0 if not. (The difference between this and BufSearchForward is that it's optimized for single characters. The overall performance of the text widget is dependent on its ability to count lines quickly, hence searching for a single character: newline)

References mBuf, mGapEnd, and mLength.

Referenced by line\_end().

**30.87.3.14 int Fl\_Text\_Buffer::findchars\_backward (int *startPos*, const char \* *searchChars*, int \* *foundPos*)**

Finds the previous occurrence of the specified characters.

Search backwards in buffer for characters in *searchChars*, starting with the character BEFORE *startPos*, returning the result in *foundPos* returns 1 if found, 0 if not.

References mBuf, mGapEnd, and mGapStart.

### 30.87.3.15 int Fl\_Text\_Buffer::findchars\_forward (int *startPos*, const char \* *searchChars*, int \* *foundPos*)

Finds the next occurrence of the specified characters.

Search forwards in buffer for characters in *searchChars*, starting with the character *startPos*, and returning the result in *foundPos* returns 1 if found, 0 if not.

References mBuf, mGapEnd, mGapStart, and mLength.

### 30.87.3.16 int Fl\_Text\_Buffer::highlight () [inline]

Returns the highlighted text.

When you are done with the text, free it using the free() function.

### 30.87.3.17 void Fl\_Text\_Buffer::highlight (int *start*, int *end*)

Highlights the specified text within the buffer.

References mHighlight, redisplay\_selection(), and Fl\_Text\_Selection::set().

### 30.87.3.18 int Fl\_Text\_Buffer::highlight\_position (int \* *start*, int \* *end*, int \* *isRect*, int \* *rectStart*, int \* *rectEnd*)

Highlights the specified rectangle of text within the buffer.

References mHighlight, and Fl\_Text\_Selection::position().

### 30.87.3.19 int Fl\_Text\_Buffer::highlight\_position (int \* *start*, int \* *end*)

Highlights the specified text between *start* and *end* within the buffer.

References mHighlight, and Fl\_Text\_Selection::position().

### 30.87.3.20 Fl\_Text\_Selection\* Fl\_Text\_Buffer::highlight\_selection () [inline]

Returns the current highlight selection.

Referenced by Fl\_Text\_Display::draw\_vline(), and Fl\_Text\_Display::position\_style().

### 30.87.3.21 char \* Fl\_Text\_Buffer::highlight\_text ()

Returns the highlighted text.

When you are done with the text, free it using the free() function.

References mHighlight.

**30.87.3.22 void Fl\_Text\_Buffer::insert (int *pos*, const char \* *text*)**

Inserts null-terminated string *text* at position *pos*.

References call\_modify\_callbacks(), call\_predelete\_callbacks(), insert\_(), mCursorPosHint, and mLength.

Referenced by Fl\_Text\_Display::find\_wrap\_range(), insertfile(), and undo().

**30.87.3.23 int Fl\_Text\_Buffer::insert\_ (int *pos*, const char \* *text*) [protected]**

Internal (non-redisplaying) version of BufInsert.

Returns the length of text inserted (this is just strlen(*text*), however this calculation can be expensive and the length will be required by any caller who will continue on to call redisplay). *pos* must be contiguous with the existing text in the buffer (i.e. not past the end).

References mBuf, mCanUndo, mGapEnd, mGapStart, mLength, reallocate\_with\_gap(), and update\_selections().

Referenced by insert(), insert\_column\_(), overlay\_rectangular\_(), remove\_rectangular\_(), replace(), replace\_rectangular(), and substitute\_null\_characters().

**30.87.3.24 void Fl\_Text\_Buffer::insert\_column (int *column*, int *startPos*, const char \* *text*, int \* *charsInserted*, int \* *charsDeleted*)**

Insert *s* columnwise into buffer starting at displayed character position *column* on the line beginning at *startPos*.

Opens a rectangular space the width and height of *s*, by moving all text to the right of *column* right. If *charsInserted* and *charsDeleted* are not NULL, the number of characters inserted and deleted in the operation (beginning at *startPos*) are returned in these arguments.

References call\_modify\_callbacks(), call\_predelete\_callbacks(), Fl::error, insert\_column\_(), line\_end(), line\_start(), mCursorPosHint, skip\_lines(), and text\_range().

**30.87.3.25 void Fl\_Text\_Buffer::insert\_column\_ (int *column*, int *startPos*, const char \* *insText*, int \* *nDeleted*, int \* *nInserted*, int \* *endPos*) [protected]**

Inserts a column of text without calling the modify callbacks.

Note that in some pathological cases, inserting can actually decrease the size of the buffer because of spaces being coalesced into tabs. *nDeleted* and *nInserted* return the number of characters deleted and inserted beginning at the start of the line containing *startPos*. *endPos* returns buffer position of the lower left edge of the inserted column (as a hint for routines which need to set a cursor position).

References insert\_(), line\_end(), line\_start(), mLength, mNullSubsChar, mTabDist, mUseTabs, remove\_(), skip\_lines(), and text\_range().

Referenced by insert\_column(), and replace\_rectangular().

**30.87.3.26 int Fl\_Text\_Buffer::insertfile (const char \* *file*, int *pos*, int *buflen* = 128\*1024)**

Inserts a file at the specified position.

Returns 0 on success, non-zero on error (strerror() contains reason). 1 indicates open for read failed (no data loaded). 2 indicates error occurred while reading data (data was partially loaded).

References `insert()`.

#### 30.87.3.27 int Fl\_Text\_Buffer::length () [inline]

Returns the number of characters in the buffer.

Referenced by `Fl_Text_Display::buffer()`, `Fl_Text_Display::find_wrap_range()`, `Fl_Text_Display::measure_deleted_lines()`, `Fl_Text_Display::offset_line_starts()`, `Fl_Text_Display::overstrike()`, `search_forward()`, `text()`, `word_end()`, `Fl_Text_Display::wrap_uses_character()`, and `Fl_Text_Display::wrapped_line_counter()`.

#### 30.87.3.28 int Fl\_Text\_Buffer::line\_start (int pos)

Returns the position of the start of the line containing position *pos*.

References `findchar_backward()`.

Referenced by `Fl_Text_Display::draw_vline()`, `Fl_Text_Display::find_wrap_range()`, `Fl_Text_Display::in_selection()`, `insert_column()`, `insert_column_()`, `Fl_Text_Display::line_start()`, `line_text()`, `Fl_Text_Display::measure_deleted_lines()`, `overlay_rectangular()`, `overlay_rectangular_()`, `Fl_Text_Display::overstrike()`, `remove_rectangular()`, `remove_rectangular_()`, `replace_rectangular()`, `Fl_Text_Display::rewind_lines()`, `text_in_rectangle()`, and `Fl_Text_Display::wrapped_column()`.

#### 30.87.3.29 char \* Fl\_Text\_Buffer::line\_text (int pos)

Returns the text from the entire line containing the specified character position.

When you are done with the text, free it using the `free()` function.

References `line_end()`, `line_start()`, and `text_range()`.

#### 30.87.3.30 char Fl\_Text\_Buffer::null\_substitution\_character () [inline]

Returns the current nul substitution character.

Referenced by `Fl_Text_Display::draw_vline()`, `Fl_Text_Display::overstrike()`, and `Fl_Text_Display::wrapped_line_counter()`.

#### 30.87.3.31 int Fl\_Text\_Buffer::outputfile (const char \*file, int start, int end, int buflen = 128\*1024)

Writes the specified portions of the file to a file.

Returns 0 on success, non-zero on error (`strerror()` contains reason). 1 indicates open for write failed (no data saved). 2 indicates error occurred while writing data (data was partially saved).

References `text_range()`.

#### 30.87.3.32 void Fl\_Text\_Buffer::overlay\_rectangular (int startPos, int rectStart, int rectEnd, const char \*text, int \*charsInserted, int \*charsDeleted)

Overlay *text* between displayed character positions *rectStart* and *rectEnd* on the line beginning at *startPos*.

If *charsInserted* and *charsDeleted* are not NULL, the number of characters inserted and deleted in the operation (beginning at *startPos*) are returned in these arguments.

References `call_modify_callbacks()`, `call_predelete_callbacks()`, `Fl::error`, `line_end()`, `line_start()`, `mCursorPosHint`, `overlay_rectangular()`, `skip_lines()`, and `text_range()`.

Referenced by `clear_rectangular()`.

### **30.87.3.33 void Fl\_Text\_Buffer::overlay\_rectangular\_(int startPos, int rectStart, int rectEnd, const char \*insText, int \*nDeleted, int \*nInserted, int \*endPos) [protected]**

Overlay a rectangular area of text without calling the modify callbacks.

*nDeleted* and *nInserted* return the number of characters deleted and inserted beginning at the start of the line containing *startPos*. *endPos* returns buffer position of the lower left edge of the inserted column (as a hint for routines which need to set a cursor position).

References `insert_()`, `line_end()`, `line_start()`, `mLength`, `mNullSubsChar`, `mTabDist`, `mUseTabs`, `remove_()`, `skip_lines()`, and `text_range()`.

Referenced by `overlay_rectangular()`.

### **30.87.3.34 Fl\_Text\_Selection\* Fl\_Text\_Buffer::primary\_selection() [inline]**

Returns the primary selection.

Referenced by `Fl_Text_Display::draw_vline()`, `Fl_Text_Display::handle()`, `Fl_Text_Display::in_selection()`, and `Fl_Text_Display::position_style()`.

### **30.87.3.35 void Fl\_Text\_Buffer::rectangular\_selection\_boundaries(int lineStartPos, int rectStart, int rectEnd, int \*selStart, int \*selEnd) [protected]**

Finds the first and last character position in a line within a rectangular selection (for copying).

Includes tabs which cross *rectStart*, but not control characters which do so. Leaves off tabs which cross *rectEnd*.

Technically, the calling routine should convert tab characters which cross the right boundary of the selection to spaces which line up with the edge of the selection. Unfortunately, the additional memory management required in the parent routine to allow for the changes in string size is not worth all the extra work just for a couple of shifted characters, so if a tab protrudes, just lop it off and hope that there are other characters in the selection to establish the right margin for subsequent columnar pastes of this data.

References `character()`, `character_width()`, `mLength`, `mNullSubsChar`, and `mTabDist`.

Referenced by `text_in_rectangle()`.

### **30.87.3.36 void Fl\_Text\_Buffer::remove(int start, int end)**

Deletes a range of characters in the buffer.

References `call_modify_callbacks()`, `call_predelete_callbacks()`, `mCursorPosHint`, `mLength`, `remove_()`, and `text_range()`.

**30.87.3.37 void Fl\_Text\_Buffer::remove\_ (int start, int end) [protected]**

Internal (non-redisplaying) version of BufRemove.

Removes the contents of the buffer between start and end (and moves the gap to the site of the delete).

References mBuf, mCanUndo, mGapEnd, mGapStart, mLength, and update\_selections().

Referenced by insert\_column\_(), overlay\_rectangular\_(), remove(), remove\_rectangular\_(), replace(), and substitute\_null\_characters().

**30.87.3.38 void Fl\_Text\_Buffer::remove\_modify\_callback (Fl\_Text\_Modify\_Cb *bufModifiedCB*, void \* *cbArg*)**

Removes a modify callback.

References Fl::error, mCbArgs, mNModifyProcs, and mNodifyProcs.

**30.87.3.39 void Fl\_Text\_Buffer::remove\_pdelete\_callback (Fl\_Text\_Pdelete\_Cb *bufPreDeleteCB*, void \* *cbArg*)**

Removes a callback routine *bufPreDeleteCB* associated with argument *cbArg* to be called before text is deleted from the buffer.

References Fl::error, mNPredeleteProcs, mPredeleteCbArgs, and mPredeleteProcs.

**30.87.3.40 void Fl\_Text\_Buffer::remove\_rectangular\_ (int *start*, int *end*, int *rectStart*, int *rectEnd*, int \* *replaceLen*, int \* *endPos*) [protected]**

Deletes a rectangle of text without calling the modify callbacks.

Returns the number of characters replacing those between *start* and *end*. Note that in some pathological cases, deleting can actually increase the size of the buffer because of tab expansions. *endPos* returns the buffer position of the point in the last line where the text was removed (as a hint for routines which need to position the cursor after a delete operation)

References count\_lines(), insert\_(), line\_end(), line\_start(), mLength, mNullSubsChar, mTabDist, mUseTabs, remove\_(), and text\_range().

Referenced by remove\_rectangular(), and replace\_rectangular().

**30.87.3.41 void Fl\_Text\_Buffer::remove\_secondary\_selection ()**

Removes the text from the buffer corresponding to the secondary text selection object.

References mSecondary, and remove\_selection\_().

**30.87.3.42 void Fl\_Text\_Buffer::remove\_selection ()**

Removes the text in the primary selection.

References mPrimary, and remove\_selection\_().

Referenced by Fl\_Text\_Editor::handle().

**30.87.3.43 void Fl\_Text\_Buffer::remove\_selection\_ (Fl\_Text\_Selection \* sel) [protected]**

Removes the text from the buffer corresponding to *sel*.

References Fl\_Text\_Selection::position(), and remove\_rectangular().

Referenced by remove\_secondary\_selection(), and remove\_selection().

**30.87.3.44 void Fl\_Text\_Buffer::replace\_rectangular (int start, int end, int rectStart, int rectEnd, const char \* text)**

Replaces a rectangular area in the buffer, given by *start*, *end*, *rectStart*, and *rectEnd*, with *text*.

If *text* is vertically longer than the rectangle, add extra lines to make room for it.

References call\_modify\_callbacks(), call\_predelete\_callbacks(), count\_lines(), Fl::error, insert\_(), insert\_column\_(), line\_end(), line\_start(), mCursorPosHint, remove\_rectangular\_(), and text\_range().

Referenced by replace\_selection\_().

**30.87.3.45 void Fl\_Text\_Buffer::replace\_secondary\_selection (const char \* text)**

Replaces the text from the buffer corresponding to the secondary text selection object with the new string *text*.

References mSecondary, and replace\_selection\_().

**30.87.3.46 void Fl\_Text\_Buffer::replace\_selection (const char \* text)**

Replaces the text in the primary selection.

References mPrimary, and replace\_selection\_().

**30.87.3.47 void Fl\_Text\_Buffer::replace\_selection\_ (Fl\_Text\_Selection \* sel, const char \* text) [protected]**

Replaces the *text* in selection *sel*.

References Fl\_Text\_Selection::mSelected, Fl\_Text\_Selection::position(), redisplay\_selection(), replace(), and replace\_rectangular().

Referenced by replace\_secondary\_selection(), and replace\_selection\_().

**30.87.3.48 int Fl\_Text\_Buffer::rewind\_lines (int startPos, int nLines)**

Finds and returns the position of the first character of the line *nLines* backwards from *startPos* (not counting the character pointed to by *startpos* if that is a newline) in the buffer.

*nLines* == 0 means find the beginning of the line

References mBuf, mGapEnd, and mGapStart.

Referenced by Fl\_Text\_Display::rewind\_lines().

**30.87.3.49 void Fl\_Text\_Buffer::secondary\_select (int *start*, int *end*)**

Selects a range of characters in the secondary selection.

References mSecondary, redisplay\_selection(), and Fl\_Text\_Selection::set().

**30.87.3.50 Fl\_Text\_Selection\* Fl\_Text\_Buffer::secondary\_selection () [inline]**

Returns the secondary selection.

Referenced by Fl\_Text\_Display::draw\_vline(), and Fl\_Text\_Display::position\_style().

**30.87.3.51 int Fl\_Text\_Buffer::secondary\_selection\_position (int \* *start*, int \* *end*, int \* *isRect*, int \* *rectStart*, int \* *rectEnd*)**

Returns the current selection in the secondary text selection object.

References mSecondary, and Fl\_Text\_Selection::position().

**30.87.3.52 int Fl\_Text\_Buffer::secondary\_selection\_position (int \* *start*, int \* *end*)**

Returns the current selection in the secondary text selection object.

References mSecondary, and Fl\_Text\_Selection::position().

**30.87.3.53 char \* Fl\_Text\_Buffer::secondary\_selection\_text ()**

Returns the text in the secondary selection.

When you are done with the text, free it using the free() function.

References mSecondary.

**30.87.3.54 void Fl\_Text\_Buffer::secondary\_unselect ()**

Clears any selection in the secondary text selection object.

Cancels any previous selection on the primary text selection object.

References mSecondary, Fl\_Text\_Selection::mSelected, and redisplay\_selection().

**30.87.3.55 void Fl\_Text\_Buffer::select (int *start*, int *end*)**

Selects a range of characters in the buffer.

References mPrimary, redisplay\_selection(), and Fl\_Text\_Selection::set().

Referenced by Fl\_Text\_Display::handle(), and Fl\_Text\_Editor::handle\_key().

**30.87.3.56 char \* Fl\_Text\_Buffer::selection\_text ()**

Returns the currently selected text.

When you are done with the text, free it using the free() function.

References mPrimary.

Referenced by Fl\_Text\_Display::handle().

### 30.87.3.57 int Fl\_Text\_Buffer::substitute\_null\_characters (char \* string, int len)

The primary routine for integrating new text into a text buffer with substitution of another character for ascii nuls.

This substitutes null characters in the string in preparation for being copied or replaced into the buffer, and if necessary, adjusts the buffer as well, in the event that the string contains the character it is currently using for substitution. Returns 0, if substitution is no longer possible because all non-printable characters are already in use.

References insert\_(), mLength, mNullSubsChar, remove\_(), and text().

### 30.87.3.58 int Fl\_Text\_Buffer::tab\_distance () [inline]

Gets the tab width.

Referenced by Fl\_Text\_Display::draw\_vline(), Fl\_Text\_Display::overstrike(), and Fl\_Text\_Display::wrapped\_line\_counter().

### 30.87.3.59 char \* Fl\_Text\_Buffer::text ()

Get the entire contents of a text buffer.

Memory is allocated to contain the returned string, which the caller must free.

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by substitute\_null\_characters(), tab\_distance(), and text().

### 30.87.3.60 char \* Fl\_Text\_Buffer::text\_in\_rectangle (int start, int end, int rectStart, int rectEnd)

Returns the text from the given rectangle.

When you are done with the text, free it using the free() function.

References line\_end(), line\_start(), mNullSubsChar, mTabDist, mUseTabs, rectangular\_selection\_boundaries(), and text\_range().

### 30.87.3.61 char \* Fl\_Text\_Buffer::text\_range (int start, int end)

Return a copy of the text between *start* and *end* character positions from text buffer *buf*.

Positions start at 0, and the range does not include the character pointed to by *end*. When you are done with the text, free it using the free() function.

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by Fl\_Text\_Display::draw\_vline(), insert\_column(), insert\_column\_(), line\_text(), outputfile(), overlay\_rectangular(), overlay\_rectangular\_(), remove(), remove\_rectangular(), remove\_rectangular\_(), replace(), replace\_rectangular(), and text\_in\_rectangle().

**30.87.3.62 void Fl\_Text\_Buffer::unhighlight ()**

Unhighlights text in the buffer.

References mHighlight, Fl\_Text\_Selection::mSelected, and redisplay\_selection().

**30.87.3.63 void Fl\_Text\_Buffer::unsubstitute\_null\_characters (char \* *string*)**

Converts strings obtained from buffers which contain null characters, which have been substituted for by a special substitution character, back to a null-containing string.

There is no time penalty for calling this routine if no substitution has been done.

References mNullSubsChar.

**30.87.3.64 int Fl\_Text\_Buffer::word\_end (int *pos*)**

Returns the position corresponding to the end of the word.

References character(), and length().

## 30.87.4 Member Data Documentation

**30.87.4.1 Fl\_Text\_Modify\_Cb\* Fl\_Text\_Buffer::mModifyProcs [protected]**

< procedures to call when buffer is

modified to redisplay contents

Referenced by add\_modify\_callback(), call\_modify\_callbacks(), Fl\_Text\_Buffer(), remove\_modify\_callback(), and ~Fl\_Text\_Buffer().

**30.87.4.2 char Fl\_Text\_Buffer::mNullSubsChar [protected]**

NEdit is based on C null-terminated strings, so ascii-nul characters must be substituted with something else.

This is the else, but of course, things get quite messy when you use it

Referenced by expand\_character(), Fl\_Text\_Buffer(), insert\_column\_(), overlay\_rectangular\_(), rectangular\_selection\_boundaries(), remove\_rectangular\_(), skip\_displayed\_characters(), substitute\_null\_characters(), text\_in\_rectangle(), and unsubstitute\_null\_characters().

**30.87.4.3 Fl\_Text\_Predelete\_Cb\* Fl\_Text\_Buffer::mPredeleteProcs [protected]**

< procedure to call before text is deleted

from the buffer; at most one is supported.

Referenced by add\_predelete\_callback(), call\_predelete\_callbacks(), Fl\_Text\_Buffer(), remove\_predelete\_callback(), and ~Fl\_Text\_Buffer().

**30.87.4.4 int Fl\_Text\_Buffer::mTabDist [protected]**

equiv.

number of characters in a tab

Referenced by expand\_character(), Fl\_Text\_Buffer(), insert\_column\_(), overlay\_rectangular\_(), rectangular\_selection\_boundaries(), remove\_rectangular\_(), skip\_displayed\_characters(), tab\_distance(), and text\_in\_rectangle().

The documentation for this class was generated from the following files:


- [Fl\\_Text\\_Buffer.H](#)
- [Fl\\_Text\\_Buffer.cxx](#)

## 30.88 Fl\_Text\_Display Class Reference

This is the FLTK text display widget.

```
#include <Fl_Text_Display.H>
```

Inheritance diagram for Fl\_Text\_Display::



### Classes

- struct [Style\\_Table\\_Entry](#)

*This structure associates the color,font,size of a string to draw with an attribute mask matching attr.*

### Public Types

- enum {
 **NORMAL\_CURSOR, CARET\_CURSOR, DIM\_CURSOR, BLOCK\_CURSOR,**  
**HEAVY\_CURSOR }**  
*text display cursor shapes enumeration*
- enum { **CURSOR\_POS, CHARACTER\_POS** }
- enum { **DRAG\_CHAR = 0, DRAG\_WORD = 1, DRAG\_LINE = 2** }  
*drag types- they match [Fl::event\\_clicks\(\)](#) so that single clicking to start a collection selects by character, double clicking selects by word and triple clicking selects by line.*
- enum { **ATTR\_NONE = 0, ATTR\_UNDERLINE = 1, ATTR\_HIDDEN = 2** }  
*style attributes - currently not implemented!*
- typedef void(\* **Unfinished\_Style\_Cb** )(int, void \*)

### Public Member Functions

- [Fl\\_Text\\_Display](#) (int X, int Y, int W, int H, const char \*l=0)  
*Creates a new text display widget.*
- [~Fl\\_Text\\_Display](#) ()  
*Free a text display and release its associated memory.*

- virtual int **handle** (int e)  
*Handles the specified event.*
- void **buffer** (Fl\_Text\_Buffer \*buf)  
*Attach a text buffer to display, replacing the current buffer (if any).*
- void **buffer** (Fl\_Text\_Buffer &buf)  
*Sets or gets the current text buffer associated with the text widget.*
- Fl\_Text\_Buffer \* **buffer** ()  
*Gets the current text buffer associated with the text widget.*
- void **redisplay\_range** (int start, int end)  
*Marks text from start to end as needing a redraw.*
- void **scroll** (int topLineNum, int horizOffset)  
*Scrolls the current buffer to start at the specified line and column.*
- void **insert** (const char \*text)  
*Inserts "text" at the current cursor location.*
- void **overstrike** (const char \*text)  
*Replaces text at the current insert position.*
- void **insert\_position** (int newPos)  
*Sets the position of the text insertion cursor for text display.*
- int **insert\_position** ()  
*Gets the position of the text insertion cursor for text display.*
- int **in\_selection** (int x, int y)  
*Return 1 if position (X, Y) is inside of the primary Fl\_Text\_Selection.*
- void **show\_insert\_position** ()  
*Scrolls the text buffer to show the current insert position.*
- int **move\_right** ()  
*Moves the current insert position right one character.*
- int **move\_left** ()  
*Moves the current insert position left one character.*
- int **move\_up** ()  
*Moves the current insert position up one line.*
- int **move\_down** ()  
*Moves the current insert position down one line.*
- int **count\_lines** (int start, int end, bool start\_pos\_is\_line\_start)  
*Same as BufCountLines, but takes in to account wrapping if wrapping is turned on.*

- int **line\_start** (int pos)

*Same as BufStartOfLine, but returns the character after last wrap point rather than the last newline.*

- int **line\_end** (int pos, bool start\_pos\_is\_line\_start)

*Same as BufEndOfLine, but takes in to account line breaks when wrapping is turned on.*

- int **skip\_lines** (int startPos, int nLines, bool startPosIsLineStart)

*Same as BufCountForwardNLines, but takes in to account line breaks when wrapping is turned on.*

- int **rewind\_lines** (int startPos, int nLines)

*Same as BufCountBackwardNLines, but takes in to account line breaks when wrapping is turned on.*

- void **next\_word** (void)

*Moves the current insert position right one word.*

- void **previous\_word** (void)

*Moves the current insert position left one word.*

- void **show\_cursor** (int b=1)

*Shows the text cursor.*

- void **hide\_cursor** ()

*Hides the text cursor.*

- void **cursor\_style** (int style)

*Sets the text cursor style to one of the following::*

- **Fl\_Color cursor\_color** () const

*Sets or gets the text cursor color.*

- void **cursor\_color** (**Fl\_Color** n)

*Sets or gets the text cursor color.*

- int **scrollbar\_width** ()

*Sets or gets the width/height of the scrollbars.*

- void **scrollbar\_width** (int W)

*Sets or gets the width/height of the scrollbars.*

- **Fl\_Align scrollbar\_align** ()

*Gets the scrollbar alignment type.*

- void **scrollbar\_align** (**Fl\_Align** a)

*Sets the scrollbar alignment type.*

- int **word\_start** (int pos)

*Moves the insert position to the beginning of the current word.*

- int **word\_end** (int pos)

*Moves the insert position to the end of the current word.*

- void **highlight\_data** (Fl\_Text\_Buffer \*styleBuffer, const Style\_Table\_Entry \*styleTable, int nStyles, char unfinishedStyle, Unfinished\_Style\_Cb unfinishedHighlightCB, void \*cbArg)

*Attach (or remove) highlight information in text display and redisplay.*

- int **position\_style** (int lineStartPos, int lineLen, int lineIndex, int dispIndex)

*Determine the drawing method to use to draw a specific character from "buf".*

- int **shortcut** () const

- void **shortcut** (int s)

- Fl\_Font **textfont** () const

*Gets the default font used when drawing text in the widget.*

- void **textfont** (Fl\_Font s)

*Sets the default font used when drawing text in the widget.*

- Fl\_Fontsize **textsize** () const

*Gets the default size of text in the widget.*

- void **textsize** (Fl\_Fontsize s)

*Sets the default size of text in the widget.*

- Fl\_Color **textcolor** () const

*Gets the default color of text in the widget.*

- void **textcolor** (unsigned n)

*Sets the default color of text in the widget.*

- int **wrapped\_column** (int row, int column)

*Correct a column number based on an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to be relative to the last actual newline in the buffer before the row and column position given, rather than the last line start created by line wrapping.*

- int **wrapped\_row** (int row)

*Correct a row number from an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to a straight number of newlines from the top line of the display.*

- void **wrap\_mode** (int wrap, int wrap\_margin)

*If mode is not zero, this call enables automatic word wrapping at column pos.*

- virtual void **resize** (int X, int Y, int W, int H)

*Change the size of the displayed text area.*

## Protected Member Functions

- virtual void **draw** ()

*Draw the widget.*

- void [draw\\_text](#) (int X, int Y, int W, int H)  
*Refresh a rectangle of the text display.*
- void [draw\\_range](#) (int start, int end)  
*Refresh all of the text between buffer positions "start" and "end" not including the character at the position "end".*
- void [draw\\_cursor](#) (int, int)  
*Draw a cursor with top center at X, y.*
- void [draw\\_string](#) (int style, int x, int y, int toX, const char \*string, int nChars)  
*Draw a string or blank area according to parameter "style", using the appropriate colors and drawing method for that style, with top left corner at X, y.*
- void [draw\\_vline](#) (int visLineNum, int leftClip, int rightClip, int leftCharIndex, int rightCharIndex)  
*Draw the text on a single line represented by "visLineNum" (the number of lines down from the top of the display), limited by "leftClip" and "rightClip" window coordinates and "leftCharIndex" and "rightCharIndex" character positions (not including the character at position "rightCharIndex").*
- void [draw\\_line\\_numbers](#) (bool clearAll)  
*Refresh the line number area.*
- void [clear\\_rect](#) (int style, int x, int y, int width, int height)  
*Clear a rectangle with the appropriate background color for "style".*
- void [display\\_insert](#) ()  
*Scroll the display to bring insertion cursor into view.*
- void [offset\\_line\\_starts](#) (int newTopLineNum)  
*Offset the line starts array, mTopLineNum, mFirstChar and lastChar, for a new vertical scroll position given by newTopLineNum.*
- void [calc\\_line\\_starts](#) (int startLine, int endLine)  
*Scan through the text in the "textD"'s buffer and recalculate the line starts array values beginning at index "startLine" and continuing through (including) "endLine".*
- void [update\\_line\\_starts](#) (int pos, int charsInserted, int charsDeleted, int linesInserted, int linesDeleted, int \*scrolled)  
*Update the line starts array, mTopLineNum, mFirstChar and lastChar for text display "textD" after a modification to the text buffer, given by the position where the change began "pos", and the numbers of characters and lines inserted and deleted.*
- void [calc\\_last\\_char](#) ()  
*Given a [FL\\_Text\\_Display](#) with a complete, up-to-date lineStarts array, update the lastChar entry to point to the last buffer position displayed.*
- int [position\\_to\\_line](#) (int pos, int \*lineNum)  
*Find the line number of position "pos" relative to the first line of displayed text.*
- int [string\\_width](#) (const char \*string, int length, int style)  
*Find the width of a string in the font of a particular style.*

- void **update\_v\_scrollbar** ()  
*Update the minimum, maximum, slider size, page increment, and value for vertical scroll bar.*
- void **update\_h\_scrollbar** ()  
*Update the minimum, maximum, slider size, page increment, and value for the horizontal scroll bar.*
- int **measure\_vline** (int visLineNum)  
*Return the width in pixels of the displayed line pointed to by "visLineNum".*
- int **longest\_vline** ()
- int **empty\_vlines** ()  
*Return true if there are lines visible with no corresponding buffer text.*
- int **vline\_length** (int visLineNum)  
*Return the length of a line (number of displayable characters) by examining entries in the line starts array rather than by scanning for newlines.*
- int **xy\_to\_position** (int x, int y, int PosType=CHARACTER\_POS)  
*Translate window coordinates to the nearest (insert cursor or character cell) text position.*
- void **xy\_to\_rowcol** (int x, int y, int \*row, int \*column, int PosType=CHARACTER\_POS)  
*Translate window coordinates to the nearest row and column number for positioning the cursor.*
- int **position\_to\_xy** (int pos, int \*x, int \*y)  
*Translate a buffer text position to the XY location where the top left of the cursor would be positioned to point to that character.*
- void **maintain\_absolute\_top\_line\_number** (int state)  
*In continuous wrap mode, internal line numbers are calculated after wrapping.*
- int **get\_absolute\_top\_line\_number** ()  
*Returns the absolute (non-wrapped) line number of the first line displayed.*
- void **absolute\_top\_line\_number** (int oldFirstChar)  
*Re-calculate absolute top line number for a change in scroll position.*
- int **maintaining\_absolute\_top\_line\_number** ()  
*Return true if a separate absolute top line number is being maintained (for displaying line numbers or showing in the statistics line).*
- void **reset\_absolute\_top\_line\_number** ()  
*Count lines from the beginning of the buffer to reestablish the absolute (non-wrapped) top line number.*
- int **position\_to\_linecol** (int pos, int \*lineNum, int \*column)  
*Find the line number of position "pos".*
- void **scroll\_** (int topLineNum, int horizOffset)
- void **extend\_range\_for\_styles** (int \*start, int \*end)  
*Extend the range of a redraw request (from \*start to \*end) with additional redraw requests resulting from changes to the attached style buffer (which contains auxiliary information for coloring or styling text).*

- void [find\\_wrap\\_range](#) (const char \*deletedText, int pos, int nInserted, int nDeleted, int \*modRangeStart, int \*modRangeEnd, int \*linesInserted, int \*linesDeleted)
 

*When continuous wrap is on, and the user inserts or deletes characters, wrapping can happen before and beyond the changed position.*
- void [measure\\_deleted\\_lines](#) (int pos, int nDeleted)
 

*This is a stripped-down version of the findWrapRange() function above, intended to be used to calculate the number of "deleted" lines during a buffer modification.*
- void [wrapped\\_line\\_counter](#) (Fl\_Text\_Buffer \*buf, int startPos, int maxPos, int maxLines, bool startPosIsLineStart, int styleBufOffset, int \*retPos, int \*retLines, int \*retLineStart, int \*retLineEnd, bool countLastLineMissingNewLine=true)
 

*Count forward from startPos to either maxPos or maxLines (whichever is reached first), and return all relevant positions and line count.*
- void [find\\_line\\_end](#) (int pos, bool start\_pos\_is\_line\_start, int \*lineEnd, int \*nextLineStart)
 

*Finds both the end of the current line and the start of the next line.*
- int [measure\\_proportional\\_character](#) (char c, int colNum, int pos)
 

*Measure the width in pixels of a character "c" at a particular column "colNum" and buffer position "pos".*
- int [wrap\\_uses\\_character](#) (int lineEndPos)
 

*Line breaks in continuous wrap mode usually happen at newlines or whitespace.*
- int [range\\_touches\\_selection](#) (Fl\_Text\_Selection \*sel, int rangeStart, int rangeEnd)
 

*Return true if the selection "sel" is rectangular, and touches a buffer position withing "rangeStart" to "rangeEnd".*

## Static Protected Member Functions

- static void [scroll\\_timer\\_cb](#) (void \*)
- static void [buffer\\_predelete\\_cb](#) (int pos, int nDeleted, void \*cbArg)
 

*Callback attached to the text buffer to receive delete information before the modifications are actually made.*
- static void [buffer\\_modified\\_cb](#) (int pos, int nInserted, int nDeleted, int nRestyled, const char \*deletedText, void \*cbArg)
 

*Callback attached to the text buffer to receive modification information.*
- static void [h\\_scrollbar\\_cb](#) (Fl\_Scrollbar \*w, Fl\_Text\_Display \*d)
- static void [v\\_scrollbar\\_cb](#) (Fl\_Scrollbar \*w, Fl\_Text\_Display \*d)
 

*Callbacks for drag or valueChanged on scroll bars.*

## Friends

- void [fl\\_text\\_drag\\_me](#) (int pos, Fl\_Text\_Display \*d)

### 30.88.1 Detailed Description

This is the FLTK text display widget.

It allows the user to view multiple lines of text and supports highlighting and scrolling. The buffer that is displayed in the widget is managed by the [Fl\\_Text\\_Buffer](#) class.

### 30.88.2 Constructor & Destructor Documentation

#### 30.88.2.1 [Fl\\_Text\\_Display::Fl\\_Text\\_Display \(int X, int Y, int W, int H, const char \\*l = 0\)](#)

Creates a new text display widget.

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Group::end\(\)](#), [FL\\_BACKGROUND2\\_COLOR](#), [FL\\_DOWN\\_FRAME](#), [FL\\_FOREGROUND\\_COLOR](#), [FL\\_HELVETICA](#), [FL\\_HORIZONTAL](#), [FL\\_NORMAL\\_SIZE](#), [FL\\_SELECTION\\_COLOR](#), [scrollbar\\_align\(\)](#), [Fl::scrollbar\\_size\(\)](#), [scrollbar\\_width\(\)](#), [Fl\\_Widget::set\\_flag\(\)](#), [Fl\\_Widget::SHORTCUT\\_LABEL](#), [textcolor\(\)](#), [textfont\(\)](#), [textsize\(\)](#), and [v\\_scrollbar\\_cb\(\)](#).

#### 30.88.2.2 [Fl\\_Text\\_Display::~Fl\\_Text\\_Display \(\)](#)

Free a text display and release its associated memory.

Note, the text BUFFER that the text display displays is a separate entity and is not freed, nor are the style buffer or style table.

References [buffer\\_modified\\_cb\(\)](#), [buffer\\_predelete\\_cb\(\)](#), and [Fl::remove\\_timeout\(\)](#).

### 30.88.3 Member Function Documentation

#### 30.88.3.1 [Fl\\_Text\\_Buffer\\* Fl\\_Text\\_Display::buffer \(\) \[inline\]](#)

Gets the current text buffer associated with the text widget.

Multiple text widgets can be associated with the same text buffer.

Referenced by [absolute\\_top\\_line\\_number\(\)](#), [count\\_lines\(\)](#), [draw\(\)](#), [find\\_line\\_end\(\)](#), [find\\_wrap\\_range\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [handle\(\)](#), [Fl\\_Text\\_Editor::handle\\_key\(\)](#), [in\\_selection\(\)](#), [line\\_end\(\)](#), [line\\_start\(\)](#), [measure\\_deleted\\_lines\(\)](#), [measure\\_proportional\\_character\(\)](#), [move\\_down\(\)](#), [move\\_left\(\)](#), [move\\_right\(\)](#), [move\\_up\(\)](#), [next\\_word\(\)](#), [position\\_to\\_linecol\(\)](#), [previous\\_word\(\)](#), [redisplay\\_range\(\)](#), [resize\(\)](#), [rewind\\_lines\(\)](#), [skip\\_lines\(\)](#), [wrap\\_mode\(\)](#), [wrap\\_uses\\_character\(\)](#), [wrapped\\_column\(\)](#), [wrapped\\_line\\_counter\(\)](#), and [wrapped\\_row\(\)](#).

#### 30.88.3.2 [void Fl\\_Text\\_Display::buffer \(Fl\\_Text\\_Buffer & buf\) \[inline\]](#)

Sets or gets the current text buffer associated with the text widget.

Multiple text widgets can be associated with the same text buffer.

References [buffer\(\)](#).

Referenced by [buffer\(\)](#).

**30.88.3.3 void Fl\_Text\_Display::calc\_line\_starts (int startLine, int endLine) [protected]**

Scan through the text in the "textD"'s buffer and recalculate the line starts array values beginning at index "startLine" and continuing through (including) "endLine".

It assumes that the line starts entry preceding "startLine" (or mFirstChar if startLine is 0) is good, and re-counts newlines to fill in the requested entries. Out of range values for "startLine" and "endLine" are acceptable.

References find\_line\_end().

Referenced by offset\_line\_starts(), resize(), update\_line\_starts(), and wrap\_mode().

**30.88.3.4 int Fl\_Text\_Display::count\_lines (int startPos, int endPos, bool startPosIsLineStart)**

Same as BufCountLines, but takes in to account wrapping if wrapping is turned on.

If the caller knows that startPos is at a line start, it can pass "startPosIsLineStart" as True to make the call more efficient by avoiding the additional step of scanning back to the last newline.

References buffer(), Fl\_Text\_Buffer::count\_lines(), and wrapped\_line\_counter().

Referenced by display\_insert(), Fl\_Text\_Editor::kf\_ctrl\_move(), resize(), and wrap\_mode().

**30.88.3.5 void Fl\_Text\_Display::cursor\_color (Fl\_Color n) [inline]**

Sets or gets the text cursor color.

**30.88.3.6 Fl\_Color Fl\_Text\_Display::cursor\_color () const [inline]**

Sets or gets the text cursor color.

**30.88.3.7 void Fl\_Text\_Display::cursor\_style (int style)**

Sets the text cursor style to one of the following:

- Fl\_Text\_Display::NORMAL\_CURSOR - Shows an I beam.
- Fl\_Text\_Display::CARET\_CURSOR - Shows a caret under the text.
- Fl\_Text\_Display::DIM\_CURSOR - Shows a dimmed I beam.
- Fl\_Text\_Display::BLOCK\_CURSOR - Shows an unfilled box around the current character.
- Fl\_Text\_Display::HEAVY\_CURSOR - Shows a thick I beam.

References show\_cursor().

**30.88.3.8 void Fl\_Text\_Display::display\_insert () [protected]**

Scroll the display to bring insertion cursor into view.

Note: it would be nice to be able to do this without counting lines twice (scroll\_() counts them too) and/or to count from the most efficient starting point, but the efficiency of this routine is not as important to the overall performance of the text display.

References count\_lines(), insert\_position(), line\_end(), position\_to\_xy(), and wrap\_uses\_character().  
Referenced by resize().

### **30.88.3.9 void Fl\_Text\_Display::draw () [protected, virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Group](#).

References Fl\_Widget::box(), buffer(), Fl\_Widget::color(), Fl\_Widget::damage(), Fl\_Widget::draw\_box(), draw\_cursor(), draw\_range(), draw\_text(), fl\_clip\_box(), fl\_pop\_clip(), fl\_push\_clip(), fl\_rectf(), Fl::focus(), Fl\_Widget::h(), position\_to\_xy(), scrollbar\_width(), Fl\_Group::update\_child(), Fl\_Widget::w(), Fl\_Widget::x(), and Fl\_Widget::y().

### **30.88.3.10 void Fl\_Text\_Display::draw\_line\_numbers (bool *clearAll*) [protected]**

Refresh the line number area.

If clearAll is False, writes only over the character cell areas. Setting clearAll to True will clear out any stray marks outside of the character cell area, which might have been left from before a resize or font change.

References buffer(), Fl\_Widget::visible\_r(), Fl\_Widget::w(), and Fl\_Widget::y().

Referenced by buffer\_modified\_cb(), and draw\_text().

### **30.88.3.11 void Fl\_Text\_Display::draw\_range (int *startpos*, int *endpos*) [protected]**

Refresh all of the text between buffer positions "start" and "end" not including the character at the position "end".

If end points beyond the end of the buffer, refresh the whole display after pos, including blank lines which are not technically part of any range of characters.

References draw\_vline(), empty\_vlines(), and position\_to\_line().

Referenced by draw().

### **30.88.3.12 void Fl\_Text\_Display::draw\_string (int *style*, int *X*, int *Y*, int *toX*, const char \* *string*, int *nChars*) [protected]**

Draw a string or blank area according to parameter "style", using the appropriate colors and drawing method for that style, with top left corner at X, y.

If style says to draw text, use "string" as source of characters, and draw "nChars", if style is FILL, erase rectangle where text would have drawn from X to toX and from Y to the maximum Y extent of the current font(s).

References clear\_rect(), Fl\_Text\_Display::Style\_Table\_Entry::color, Fl\_Widget::color(), fl\_color(), fl\_rectf(), Fl::focus(), Fl\_Text\_Display::Style\_Table\_Entry::font, Fl\_Widget::selection\_color(), Fl\_Text\_Display::Style\_Table\_Entry::size, textcolor(), textfont(), and textsize().

Referenced by draw\_vline().

**30.88.3.13 void Fl\_Text\_Display::draw\_text (int *left*, int *top*, int *width*, int *height*) [protected]**

Refresh a rectangle of the text display.

*left* and *top* are in coordinates of the text drawing window

References draw\_line\_numbers(), draw\_vline(), fl\_pop\_clip(), and fl\_push\_clip().

Referenced by draw().

**30.88.3.14 void Fl\_Text\_Display::find\_line\_end (int *startPos*, bool *startPosIsLineStart*, int \* *lineEnd*, int \* *nextLineStart*) [protected]**

Finds both the end of the current line and the start of the next line.

Why? In continuous wrap mode, if you need to know both, figuring out one from the other can be expensive or error prone. The problem comes when there's a trailing space or tab just before the end of the buffer. To translate an end of line value to or from the next lines start value, you need to know whether the trailing space or tab is being used as a line break or just a normal character, and to find that out would otherwise require counting all the way back to the beginning of the line.

References buffer(), Fl\_Text\_Buffer::line\_end(), and wrapped\_line\_counter().

Referenced by calc\_line\_starts().

**30.88.3.15 void Fl\_Text\_Display::find\_wrap\_range (const char \* *deletedText*, int *pos*, int *nInserted*, int *nDeleted*, int \* *modRangeStart*, int \* *modRangeEnd*, int \* *linesInserted*, int \* *linesDeleted*) [protected]**

When continuous wrap is on, and the user inserts or deletes characters, wrapping can happen before and beyond the changed position.

This routine finds the extent of the changes, and counts the deleted and inserted lines over that range. It also attempts to minimize the size of the range to what has to be counted and re-displayed, so the results can be useful both for delimiting where the line starts need to be recalculated, and for deciding what part of the text to redisplay.

References buffer(), Fl\_Text\_Buffer::character(), Fl\_Text\_Buffer::copy(), Fl\_Text\_Buffer::insert(), Fl\_Text\_Buffer::length(), line\_end(), Fl\_Text\_Buffer::line\_start(), and wrapped\_line\_counter().

Referenced by buffer\_modified\_cb().

**30.88.3.16 int Fl\_Text\_Display::get\_absolute\_top\_line\_number () [protected]**

Returns the absolute (non-wrapped) line number of the first line displayed.

Returns 0 if the absolute top line number is not being maintained.

References maintaining\_absolute\_top\_line\_number().

**30.88.3.17 int Fl\_Text\_Display::handle (int *event*) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← *event* the kind of event received

#### Return values:

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Group](#).

Reimplemented in [Fl\\_Text\\_Editor](#).

References Fl\_Widget::active\_r(), Fl::add\_timeout(), buffer(), Fl\_Text\_Buffer::character(), Fl::copy(), Fl\_Window::cursor(), Fl\_Text\_Selection::end(), Fl\_Group::end(), Fl::event\_clicks(), Fl::event\_dy(), Fl::event\_inside(), Fl::event\_key(), Fl::event\_state(), Fl::event\_x(), Fl::event\_y(), FL\_COMMAND, FL\_CTRL, FL\_DRAG, FL\_ENTER, FL\_FOCUS, FL\_HIDE, FL\_KEYBOARD, FL\_KEYUP, FL\_LEAVE, FL\_MOUSEWHEEL, FL\_MOVE, FL\_PUSH, FL\_RELEASE, FL\_SHIFT, FL\_SHORTCUT, FL\_UNFOCUS, Fl\_Group::focus(), Fl::focus(), Fl\_Group::handle(), insert\_position(), line\_end(), line\_start(), Fl\_Text\_Buffer::primary\_selection(), redisplay\_range(), Fl::remove\_timeout(), Fl\_Text\_Buffer::select(), Fl\_Text\_Buffer::selection\_text(), shortcut(), show\_insert\_position(), Fl\_Text\_Selection::start(), Fl\_Widget::test\_shortcut(), Fl::test\_shortcut(), Fl\_Text\_Buffer::unselect(), Fl::visible\_focus(), Fl\_Widget::window(), word\_end(), word\_start(), and xy\_to\_position().

### 30.88.3.18 void Fl\_Text\_Display::highlight\_data (Fl\_Text\_Buffer \* *styleBuffer*, const Style\_Table\_Entry \* *styleTable*, int *nStyles*, char *unfinishedStyle*, Unfinished\_Style\_Cb *unfinishedHighlightCB*, void \* *cbArg*)

Attach (or remove) highlight information in text display and redisplay.

Highlighting information consists of a style buffer which parallels the normal text buffer, but codes font and color information for the display; a style table which translates style buffer codes (indexed by buffer character - 'A') into fonts and colors; and a callback mechanism for as-needed highlighting, triggered by a style buffer entry of "unfinishedStyle". Style buffer can trigger additional redisplay during a normal buffer modification if the buffer contains a primary [Fl\\_Text\\_Selection](#) (see extendRangeForStyleMods for more information on this protocol).

Style buffers, tables and their associated memory are managed by the caller.

References Fl\_Widget::damage().

### 30.88.3.19 void Fl\_Text\_Display::insert (const char \* *text*)

Inserts "text" at the current cursor location.

This has the same effect as inserting the text into the buffer using BufInsert and then moving the insert position after the newly inserted text, except that it's optimized to do less redrawing.

Referenced by Fl\_Text\_Editor::handle(), Fl\_Text\_Editor::handle\_key(), Fl\_Text\_Editor::kf\_default(), and Fl\_Text\_Editor::kf\_enter().

### 30.88.3.20 int Fl\_Text\_Display::line\_end (int pos, bool startPosIsLineStart)

Same as BufEndOfLine, but takes in to account line breaks when wrapping is turned on.

If the caller knows that startPos is at a line start, it can pass "startPosIsLineStart" as True to make the call more efficient by avoiding the additional step of scanning back to the last newline.

Note that the definition of the end of a line is less clear when continuous wrap is on. With continuous wrap off, it's just a pointer to the newline that ends the line. When it's on, it's the character beyond the last DISPLAYABLE character on the line, where a whitespace character which has been "converted" to a newline for wrapping is not considered displayable. Also note that, a line can be wrapped at a non-whitespace character if the line had no whitespace. In this case, this routine returns a pointer to the start of the next line. This is also consistent with the model used by visLineLength.

References buffer(), Fl\_Text\_Buffer::line\_end(), and wrapped\_line\_counter().

Referenced by calc\_last\_char(), display\_insert(), find\_wrap\_range(), handle(), move\_down(), and move\_up().

### 30.88.3.21 void Fl\_Text\_Display::maintain\_absolute\_top\_line\_number (int state) [protected]

In continuous wrap mode, internal line numbers are calculated after wrapping.

A separate non-wrapped line count is maintained when line numbering is turned on. There is some performance cost to maintaining this line count, so normally absolute line numbers are not tracked if line numbering is off. This routine allows callers to specify that they still want this line count maintained (for use via TextDPosToLineAndCol). More specifically, this allows the line number reported in the statistics line to be calibrated in absolute lines, rather than post-wrapped lines.

References reset\_absolute\_top\_line\_number().

### 30.88.3.22 void Fl\_Text\_Display::measure\_deleted\_lines (int pos, int nDeleted) [protected]

This is a stripped-down version of the findWrapRange() function above, intended to be used to calculate the number of "deleted" lines during a buffer modification.

It is called \_before\_ the modification takes place.

This function should only be called in continuous wrap mode with a non-fixed font width. In that case, it is impossible to calculate the number of deleted lines, because the necessary style information is no longer available \_after\_ the modification. In other cases, we can still perform the calculation afterwards (possibly even more efficiently).

References buffer(), Fl\_Text\_Buffer::character(), Fl\_Text\_Buffer::length(), Fl\_Text\_Buffer::line\_start(), and wrapped\_line\_counter().

Referenced by buffer\_predelete\_cb().

### 30.88.3.23 int Fl\_Text\_Display::measure\_proportional\_character (char c, int colNum, int pos) [protected]

Measure the width in pixels of a character "c" at a particular column "colNum" and buffer position "pos".

This is for measuring characters in proportional or mixed-width highlighting fonts.

A note about proportional and mixed-width fonts: the mixed width and proportional font code in nedit does not get much use in general editing, because nedit doesn't allow per-language-mode fonts, and editing programs in a proportional font is usually a bad idea, so very few users would choose a proportional font as a default. There are still probably mixed-width syntax highlighting cases where things don't redraw properly for insertion/deletion, though static display and wrapping and resizing should now be solid because they are now used for online help display.

References buffer(), Fl\_Text\_Buffer::character(), Fl\_Text\_Buffer::expand\_character(), and string\_width().  
Referenced by wrapped\_line\_counter().

### **30.88.3.24 int Fl\_Text\_Display::move\_down ()**

Moves the current insert position down one line.

References buffer(), Fl\_Text\_Buffer::character(), insert\_position(), line\_end(), line\_start(), position\_to\_line(), and skip\_lines().

Referenced by Fl\_Text\_Editor::kf\_move().

### **30.88.3.25 int Fl\_Text\_Display::move\_left ()**

Moves the current insert position left one character.

References buffer(), Fl\_Text\_Buffer::character(), and insert\_position().

Referenced by Fl\_Text\_Editor::kf\_backspace(), and Fl\_Text\_Editor::kf\_move().

### **30.88.3.26 int Fl\_Text\_Display::move\_right ()**

Moves the current insert position right one character.

References buffer(), Fl\_Text\_Buffer::character(), and insert\_position().

Referenced by Fl\_Text\_Editor::kf\_move().

### **30.88.3.27 int Fl\_Text\_Display::move\_up ()**

Moves the current insert position up one line.

References buffer(), Fl\_Text\_Buffer::character(), insert\_position(), line\_end(), line\_start(), position\_to\_line(), and rewind\_lines().

Referenced by Fl\_Text\_Editor::kf\_move().

### **30.88.3.28 void Fl\_Text\_Display::next\_word (void)**

Moves the current insert position right one word.

References buffer(), and insert\_position().

Referenced by Fl\_Text\_Editor::kf\_ctrl\_move().

**30.88.3.29 void Fl\_Text\_Display::offset\_line\_starts (int *newTopLineNum*) [protected]**

Offset the line starts array, mTopLineNum, mFirstChar and lastChar, for a new vertical scroll position given by newTopLineNum.

If any currently displayed lines will still be visible, salvage the line starts values, otherwise, count lines from the nearest known line start (start or end of buffer, or the closest value in the mLineStarts array)

References absolute\_top\_line\_number(), calc\_last\_char(), calc\_line\_starts(), Fl\_Text\_Buffer::length(), rewind\_lines(), and skip\_lines().

**30.88.3.30 void Fl\_Text\_Display::overstrike (const char \* *text*)**

Replaces text at the current insert position.

References Fl\_Text\_Buffer::character(), Fl\_Text\_Buffer::character\_width(), Fl\_Text\_Buffer::length(), Fl\_Text\_Buffer::line\_start(), Fl\_Text\_Buffer::null\_substitution\_character(), Fl\_Text\_Buffer::replace(), and Fl\_Text\_Buffer::tab\_distance().

Referenced by Fl\_Text\_Editor::handle(), Fl\_Text\_Editor::handle\_key(), and Fl\_Text\_Editor::kf\_default().

**30.88.3.31 int Fl\_Text\_Display::position\_style (int *lineStartPos*, int *lineLen*, int *lineIndex*, int *dispIndex*)**

Determine the drawing method to use to draw a specific character from "buf".

"lineStartPos" gives the character index where the line begins, "lineIndex", the number of characters past the beginning of the line, and "dispIndex", the number of displayed characters past the beginning of the line. Passing lineStartPos of -1 returns the drawing style for "no text".

Why not just: position\_style(pos)? Because style applies to blank areas of the window beyond the text boundaries, and because this routine must also decide whether a position is inside of a rectangular [Fl\\_Text\\_Selection](#), and do so efficiently, without re-counting character positions from the start of the line.

Note that style is a somewhat incorrect name, drawing method would be more appropriate.

References Fl\_Text\_Buffer::character(), Fl\_Text\_Buffer::highlight\_selection(), Fl\_Text\_Selection::includes(), Fl\_Text\_Buffer::primary\_selection(), and Fl\_Text\_Buffer::secondary\_selection().

Referenced by draw\_vline(), position\_to\_xy(), and xy\_to\_position().

**30.88.3.32 int Fl\_Text\_Display::position\_to\_line (int *pos*, int \* *lineNum*) [protected]**

Find the line number of position "pos" relative to the first line of displayed text.

Returns 0 if the line is not displayed.

References empty\_vlines(), and Fl::error.

Referenced by draw\_range(), move\_down(), move\_up(), position\_to\_linecol(), position\_to\_xy(), and update\_line\_starts().

**30.88.3.33 int Fl\_Text\_Display::position\_to\_linecol (int *pos*, int \* *lineNum*, int \* *column*) [protected]**

Find the line number of position "pos".

Note: this only works for displayed lines. If the line is not displayed, the function returns 0 (without the mLineStarts array it could turn in to very long calculation involving scanning large amounts of text in the buffer). If continuous wrap mode is on, returns the absolute line number (as opposed to the wrapped line number which is used for scrolling).

References `buffer()`, `Fl_Text_Buffer::count_displayed_characters()`, `Fl_Text_Buffer::count_lines()`, `line_start()`, `maintaining_absolute_top_line_number()`, and `position_to_line()`.

### **30.88.3.34 int Fl\_Text\_Display::position\_to\_xy (int *pos*, int \**X*, int \**Y*) [protected]**

Translate a buffer text position to the XY location where the top left of the cursor would be positioned to point to that character.

Returns 0 if the position is not displayed because it is VERTICALLY out of view. If the position is horizontally out of view, returns the X coordinate where the position would be if it were visible.

References `empty_vlines()`, `Fl_Text_Buffer::expand_character()`, `position_style()`, `position_to_line()`, `string_width()`, and `vline_length()`.

Referenced by `display_insert()`, and `draw()`.

### **30.88.3.35 void Fl\_Text\_Display::previous\_word (void)**

Moves the current insert position left one word.

References `buffer()`, and `insert_position()`.

Referenced by `Fl_Text_Editor::kf_ctrl_move()`.

### **30.88.3.36 void Fl\_Text\_Display::redisplay\_range (int *startpos*, int *endpos*)**

Marks text from start to end as needing a redraw.

References `buffer()`, `Fl_Text_Buffer::character()`, and `Fl_Widget::damage()`.

Referenced by `buffer_modified_cb()`, `handle()`, `insert_position()`, and `show_cursor()`.

### **30.88.3.37 void Fl\_Text\_Display::reset\_absolute\_top\_line\_number () [protected]**

Count lines from the beginning of the buffer to reestablish the absolute (non-wrapped) top line number.

If mode is not continuous wrap, or the number is not being maintained, does nothing.

References `absolute_top_line_number()`.

Referenced by `buffer_modified_cb()`, `maintain_absolute_top_line_number()`, and `wrap_mode()`.

### **30.88.3.38 void Fl\_Text\_Display::scroll (int *topLineNum*, int *horizOffset*)**

Scrolls the current buffer to start at the specified line and column.

References `Fl_Widget::h()`, `resize()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `Fl_Text_Editor::kf_ctrl_move()`, and `v_scrollbar_cb()`.

**30.88.3.39 void Fl\_Text\_Display::scrollbar\_width (int *W*) [inline]**

Sets or gets the width/height of the scrollbars.

**30.88.3.40 int Fl\_Text\_Display::scrollbar\_width () [inline]**

Sets or gets the width/height of the scrollbars.

Referenced by draw(), Fl\_Text\_Display(), and resize().

**30.88.3.41 void Fl\_Text\_Display::shortcut (int *s*) [inline]****Todo**

FIXME : get set methods pointing on shortcut\_ have no effects as shortcut\_ is unused in this class and derived!

**30.88.3.42 int Fl\_Text\_Display::shortcut () const [inline]****Todo**

FIXME : get set methods pointing on shortcut\_ have no effects as shortcut\_ is unused in this class and derived!

Referenced by Fl\_Text\_Editor::handle(), and handle().

**30.88.3.43 void Fl\_Text\_Display::show\_insert\_position ()**

Scrolls the text buffer to show the current insert position.

References Fl\_Widget::h(), resize(), Fl\_Widget::w(), Fl\_Widget::x(), and Fl\_Widget::y().

Referenced by Fl\_Text\_Editor::handle(), handle(), Fl\_Text\_Editor::handle\_key(), Fl\_Text\_Editor::kf\_backspace(), Fl\_Text\_Editor::kf\_copy(), Fl\_Text\_Editor::kf\_ctrl\_move(), Fl\_Text\_Editor::kf\_default(), Fl\_Text\_Editor::kf\_delete(), Fl\_Text\_Editor::kf\_enter(), Fl\_Text\_Editor::kf\_move(), Fl\_Text\_Editor::kf\_paste(), and Fl\_Text\_Editor::kf\_undo().

**30.88.3.44 int Fl\_Text\_Display::skip\_lines (int *startPos*, int *nLines*, bool *startPosIsLineStart*)**

Same as BufCountForwardNLines, but takes in to account line breaks when wrapping is turned on.

If the caller knows that startPos is at a line start, it can pass "startPosIsLineStart" as True to make the call more efficient by avoiding the additional step of scanning back to the last newline.

References buffer(), Fl\_Text\_Buffer::skip\_lines(), and wrapped\_line\_counter().

Referenced by move\_down(), offset\_line\_starts(), rewind\_lines(), and update\_line\_starts().

**30.88.3.45 void Fl\_Text\_Display::textcolor (unsigned *n*) [inline]**

Sets the default color of text in the widget.

**30.88.3.46 Fl\_Color Fl\_Text\_Display::textcolor () const [inline]**

Gets the default color of text in the widget.

Referenced by draw\_string(), and Fl\_Text\_Display().

**30.88.3.47 void Fl\_Text\_Display::textfont (Fl\_Font s) [inline]**

Sets the default font used when drawing text in the widget.

**30.88.3.48 Fl\_Font Fl\_Text\_Display::textfont () const [inline]**

Gets the default font used when drawing text in the widget.

Referenced by draw\_string(), Fl\_Text\_Display(), measure\_vline(), resize(), and string\_width().

**30.88.3.49 void Fl\_Text\_Display::textsize (Fl\_Fontsize s) [inline]**

Sets the default size of text in the widget.

**30.88.3.50 Fl\_Fontsize Fl\_Text\_Display::textsize () const [inline]**

Gets the default size of text in the widget.

Referenced by draw\_string(), Fl\_Text\_Display(), measure\_vline(), resize(), and string\_width().

**30.88.3.51 int Fl\_Text\_Display::word\_end (int pos) [inline]**

Moves the insert position to the end of the current word.

Referenced by handle().

**30.88.3.52 int Fl\_Text\_Display::word\_start (int pos) [inline]**

Moves the insert position to the beginning of the current word.

Referenced by handle().

**30.88.3.53 void Fl\_Text\_Display::wrap\_mode (int wrap, int wrapMargin)**

If *mode* is not zero, this call enables automatic word wrapping at column *pos*.

Word-wrapping does not change the text buffer itself, only the way that the text is displayed.

References buffer(), calc\_last\_char(), calc\_line\_starts(), count\_lines(), Fl\_Widget::h(), line\_start(), reset\_absolute\_top\_line\_number(), resize(), Fl\_Widget::w(), Fl\_Widget::x(), and Fl\_Widget::y().

**30.88.3.54 int Fl\_Text\_Display::wrap\_uses\_character (int lineEndPos) [protected]**

Line breaks in continuous wrap mode usually happen at newlines or whitespace.

This line-terminating character is not included in line width measurements and has a special status as a non-visible character. However, lines with no whitespace are wrapped without the benefit of a line terminating character, and this distinction causes endless trouble with all of the text display code which was originally written without continuous wrap mode and always expects to wrap at a newline character.

Given the position of the end of the line, as returned by TextDEndOfLine or BufEndOfLine, this returns true if there is a line terminating character, and false if there's not. On the last character in the buffer, this function can't tell for certain whether a trailing space was used as a wrap point, and just guesses that it wasn't. So if an exact accounting is necessary, don't use this function.

References buffer(), Fl\_Text\_Buffer::character(), and Fl\_Text\_Buffer::length().

Referenced by display\_insert(), and vline\_length().

### 30.88.3.55 int Fl\_Text\_Display::wrapped\_column (int row, int column)

Correct a column number based on an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to be relative to the last actual newline in the buffer before the row and column position given, rather than the last line start created by line wrapping.

This is an adapter for rectangular selections and code written before continuous wrap mode, which thinks that the unconstrained column is the number of characters from the last newline. Obviously this is time consuming, because it involves character re-counting.

References buffer(), Fl\_Text\_Buffer::count\_displayed\_characters(), and Fl\_Text\_Buffer::line\_start().

Referenced by in\_selection().

### 30.88.3.56 void Fl\_Text\_Display::wrapped\_line\_counter (Fl\_Text\_Buffer \* buf, int startPos, int maxPos, int maxLines, bool startPosIsLineStart, int styleBufOffset, int \* retPos, int \* retLines, int \* retLineStart, int \* retLineEnd, bool countLastLineMissingNewLine = true) [protected]

Count forward from startPos to either maxPos or maxLines (whichever is reached first), and return all relevant positions and line count.

The provided textBuffer may differ from the actual text buffer of the widget. In that case it must be a (partial) copy of the actual text buffer and the styleBufOffset argument must indicate the starting position of the copy, to take into account the correct style information.

Returned values:

retPos: Position where counting ended. When counting lines, the position returned is the start of the line "maxLines" lines beyond "startPos". retLines: Number of line breaks counted retLineStart: Start of the line where counting ended retLineEnd: End position of the last line traversed

References buffer(), Fl\_Text\_Buffer::character(), Fl\_Text\_Buffer::character\_width(), Fl\_Text\_Buffer::count\_displayed\_characters(), Fl\_Text\_Buffer::length(), line\_start(), measure\_proportional\_character(), Fl\_Text\_Buffer::null\_substitution\_character(), and Fl\_Text\_Buffer::tab\_distance().

Referenced by count\_lines(), find\_line\_end(), find\_wrap\_range(), line\_end(), line\_start(), measure\_deleted\_lines(), rewind\_lines(), and skip\_lines().

### 30.88.3.57 int Fl\_Text\_Display::wrapped\_row (int row)

Correct a row number from an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to a straight number of newlines from the top line of the display.

Because rectangular selections are based on newlines, rather than display wrapping, and anywhere a rectangular selection needs a row, it needs it in terms of un-wrapped lines.

References buffer(), and Fl\_Text\_Buffer::count\_lines().

**30.88.3.58 int Fl\_Text\_Display::xy\_to\_position (int X, int Y, int posType = CHARACTER\_POS)  
[protected]**

Translate window coordinates to the nearest (insert cursor or character cell) text position.

The parameter posType specifies how to interpret the position: CURSOR\_POS means translate the coordinates to the nearest cursor position, and CHARACTER\_POS means return the position of the character closest to (X, Y).

References Fl\_Text\_Buffer::expand\_character(), position\_style(), string\_width(), and vline\_length().

Referenced by handle(), and in\_selection().

**30.88.3.59 void Fl\_Text\_Display::xy\_to\_rowcol (int X, int Y, int \*row, int \*column, int posType = CHARACTER\_POS) [protected]**

Translate window coordinates to the nearest row and column number for positioning the cursor.

This, of course, makes no sense when the font is proportional, since there are no absolute columns. The parameter posType specifies how to interpret the position: CURSOR\_POS means translate the coordinates to the nearest position between characters, and CHARACTER\_POS means translate the position to the nearest character cell.

Referenced by in\_selection().

The documentation for this class was generated from the following files:

- [Fl\\_Text\\_Display.H](#)
- [Fl\\_Text\\_Display.cxx](#)

## 30.89 Fl\_Text\_Display::Style\_Table\_Entry Struct Reference

This structure associates the color,font,size of a string to draw with an attribute mask matching attr.

```
#include <Fl_Text_Display.H>
```

### Public Attributes

- [Fl\\_Color](#) color
- [Fl\\_Font](#) font
- int size
- unsigned attr

### 30.89.1 Detailed Description

This structure associates the color,font,size of a string to draw with an attribute mask matching attr.

The documentation for this struct was generated from the following file:


- [Fl\\_Text\\_Display.H](#)

## 30.90 Fl\_Text\_Editor Class Reference

This is the FLTK text editor widget.

```
#include <Fl_Text_Editor.H>
```

Inheritance diagram for Fl\_Text\_Editor::



### Classes

- struct [Key\\_Binding](#)  
*Simple linked list associating a key/state to a function.*

### Public Types

- [typedef int\(\\* Key\\_Func \)\(int key, Fl\\_Text\\_Editor \\*editor\)](#)  
*Key function binding callback type.*

### Public Member Functions

- [Fl\\_Text\\_Editor \(int X, int Y, int W, int H, const char \\*l=0\)](#)  
*The constructor creates a new text editor widget.*
- [virtual int handle \(int e\)](#)  
*Handles the specified event.*
- [void insert\\_mode \(int b\)](#)  
*Sets the current insert mode; if non-zero, new text is inserted before the current cursor position.*
- [int insert\\_mode \(\)](#)  
*Gets the current insert mode; if non-zero, new text is inserted before the current cursor position.*
- [void add\\_key\\_binding \(int key, int state, Key\\_Func f, Key\\_Binding \\*\\*list\)](#)  
*Adds a key of state "state" with the function "function".*
- [void add\\_key\\_binding \(int key, int state, Key\\_Func f\)](#)  
*Adds a key of state "state" with the function "function".*

- void [remove\\_key\\_binding](#) (int key, int state, [Key\\_Binding](#) \*\*list)  
*Removes the key binding associated with the key "key" of state "state".*
- void [remove\\_key\\_binding](#) (int key, int state)  
*Removes the key binding associated with the key "key" of state "state".*
- void [remove\\_all\\_key\\_bindings](#) ([Key\\_Binding](#) \*\*list)  
*Removes all of the key bindings associated with the text editor or list.*
- void [remove\\_all\\_key\\_bindings](#) ()  
*Removes all of the key bindings associated with the text editor or list.*
- void [add\\_default\\_key\\_bindings](#) ([Key\\_Binding](#) \*\*list)  
*Adds all of the default editor key bindings to the specified key binding list.*
- [Key\\_Func bound\\_key\\_function](#) (int key, int state, [Key\\_Binding](#) \*list)  
*Returns the function associated with a key binding.*
- [Key\\_Func bound\\_key\\_function](#) (int key, int state)  
*Returns the function associated with a key binding.*
- void [default\\_key\\_function](#) ([Key\\_Func](#) f)  
*Sets the default key function for unassigned keys.*

## Static Public Member Functions

- static int [kf\\_default](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Inserts the text associated with the key.*
- static int [kf\\_ignore](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Ignores the keypress.*
- static int [kf\\_backspace](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Does a backspace in the current buffer.*
- static int [kf\\_enter](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Inserts a newline at the current cursor position.*
- static int [kf\\_move](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Moves the text cursor in the direction indicated by key c.*
- static int [kf\\_shift\\_move](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Extends the current selection in the direction of key c.*
- static int [kf\\_ctrl\\_move](#) (int c, [Fl\\_Text\\_Editor](#) \*e)  
*Moves the current text cursor in the direction indicated by control key.*

- static int `kf_c_s_move` (int c, `Fl_Text_Editor` \*e)  
*Extends the current selection in the direction indicated by control key c.*
- static int `kf_home` (int, `Fl_Text_Editor` \*e)  
*Moves the text cursor to the beginning of the current line.*
- static int `kf_end` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor to the end of the current line.*
- static int `kf_left` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor one character to the left.*
- static int `kf_up` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor one line up.*
- static int `kf_right` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor one character to the right.*
- static int `kf_down` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor one line down.*
- static int `kf_page_up` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor up one page.*
- static int `kf_page_down` (int c, `Fl_Text_Editor` \*e)  
*Moves the text cursor down one page.*
- static int `kf_insert` (int c, `Fl_Text_Editor` \*e)  
*Toggles the insert mode in the text editor.*
- static int `kf_delete` (int c, `Fl_Text_Editor` \*e)  
*Does a delete of selected text or the current character in the current buffer.*
- static int `kf_copy` (int c, `Fl_Text_Editor` \*e)  
*Does a copy of selected text or the current character in the current buffer.*
- static int `kf_cut` (int c, `Fl_Text_Editor` \*e)  
*Does a cut of selected text in the current buffer.*
- static int `kf_paste` (int c, `Fl_Text_Editor` \*e)  
*Does a paste of selected text in the current buffer.*
- static int `kf_select_all` (int c, `Fl_Text_Editor` \*e)  
*Selects all text in the current buffer.*
- static int `kf_undo` (int c, `Fl_Text_Editor` \*e)  
*Undo last edit in the current buffer.*

## Protected Member Functions

- int [handle\\_key \(\)](#)  
*Handles a key press in the editor.*
- void [maybe\\_do\\_callback \(\)](#)  
*does or does not a callback according to [changed\(\)](#) and [when\(\)](#) settings*

### 30.90.1 Detailed Description

This is the FLTK text editor widget.

It allows the user to edit multiple lines of text and supports highlighting and scrolling. The buffer that is displayed in the widget is managed by the [Fl\\_Text\\_Buffer](#) class.

### 30.90.2 Constructor & Destructor Documentation

#### 30.90.2.1 [Fl\\_Text\\_Editor::Fl\\_Text\\_Editor \(int X, int Y, int W, int H, const char \\*l = 0\)](#)

The constructor creates a new text editor widget.

References [add\\_default\\_key\\_bindings\(\)](#), [default\\_key\\_function\(\)](#), and [kf\\_default\(\)](#).

### 30.90.3 Member Function Documentation

#### 30.90.3.1 [void Fl\\_Text\\_Editor::add\\_default\\_key\\_bindings \(Key\\_Binding \\*\\*list\)](#)

Adds all of the default editor key bindings to the specified key binding list.

References [add\\_key\\_binding\(\)](#).

Referenced by [Fl\\_Text\\_Editor\(\)](#).

#### 30.90.3.2 [Key\\_Func Fl\\_Text\\_Editor::bound\\_key\\_function \(int key, int state\) \[inline\]](#)

Returns the function associated with a key binding.

References [bound\\_key\\_function\(\)](#).

Referenced by [bound\\_key\\_function\(\)](#).

#### 30.90.3.3 [Fl\\_Text\\_Editor::Key\\_Func Fl\\_Text\\_Editor::bound\\_key\\_function \(int key, int state, Key\\_Binding \\*list\)](#)

Returns the function associated with a key binding.

References [Fl\\_Text\\_Editor::Key\\_Binding::function](#), [Fl\\_Text\\_Editor::Key\\_Binding::key](#), [Fl\\_Text\\_Editor::Key\\_Binding::next](#), and [Fl\\_Text\\_Editor::Key\\_Binding::state](#).

Referenced by [handle\\_key\(\)](#).

**30.90.3.4 void Fl\_Text\_Editor::default\_key\_function (Key\_Func *f*) [inline]**

Sets the default key function for unassigned keys.

Referenced by Fl\_Text\_Editor().

**30.90.3.5 int Fl\_Text\_Editor::handle (int *event*) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Text\\_Display](#).

References Fl\_Widget::active\_r(), Fl::belowmouse(), Fl\_Text\_Display::buffer(), Fl\_Window::cursor(), Fl\_Widget::do\_callback(), Fl::event\_button(), Fl::event\_text(), fl\_beep(), FL\_ENTER, FL\_FOCUS, FL\_HIDE, FL\_KEYBOARD, FL\_PASTE, FL\_PUSH, FL\_SHORTCUT, FL\_UNFOCUS, FL\_WHEN\_CHANGED, FL\_WHEN\_RELEASE, Fl\_Group::focus(), Fl\_Group::handle(), handle\_key(), Fl\_Text\_Display::insert(), insert\_mode(), maybe\_do\_callback(), Fl\_Text\_Display::overstrike(), Fl::paste(), Fl\_Widget::redraw(), Fl\_Text\_Buffer::remove\_selection(), Fl\_Widget::set\_changed(), Fl\_Text\_Display::shortcut(), Fl\_Text\_Display::show\_cursor(), Fl\_Text\_Display::show\_insert\_position(), Fl\_Widget::test\_shortcut(), Fl::test\_shortcut(), Fl::visible\_focus(), Fl\_Widget::when(), and Fl\_Widget::window().

**30.90.3.6 int Fl\_Text\_Editor::insert\_mode () [inline]**

Gets the current insert mode; if non-zero, new text is inserted before the current cursor position.

Otherwise, new text replaces text at the current cursor position.

Referenced by handle(), and handle\_key().

**30.90.3.7 void Fl\_Text\_Editor::insert\_mode (int *b*) [inline]**

Sets the current insert mode; if non-zero, new text is inserted before the current cursor position.

Otherwise, new text replaces text at the current cursor position.

Referenced by kf\_default(), and kf\_insert().

**30.90.3.8 int Fl\_Text\_Editor::kf\_backspace (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Does a backspace in the current buffer.

References Fl\_Text\_Display::buffer(), Fl\_Widget::do\_callback(), FL\_WHEN\_CHANGED, Fl\_Text\_Display::insert\_position(), Fl\_Text\_Display::move\_left(), Fl\_Widget::set\_changed(), Fl\_Text\_Display::show\_insert\_position(), and Fl\_Widget::when().

**30.90.3.9 int Fl\_Text\_Editor::kf\_c\_s\_move (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Extends the current selection in the direction indicated by control key *c*.

References Fl\_Text\_Display::insert\_position(), and kf\_ctrl\_move().

**30.90.3.10 int Fl\_Text\_Editor::kf\_copy (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Does a copy of selected text or the current character in the current buffer.

References Fl\_Text\_Display::buffer(), Fl::copy(), and Fl\_Text\_Display::show\_insert\_position().

Referenced by kf\_cut().

**30.90.3.11 int Fl\_Text\_Editor::kf\_cut (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Does a cut of selected text in the current buffer.

References Fl\_Widget::do\_callback(), FL\_WHEN\_CHANGED, kf\_copy(), Fl\_Widget::set\_changed(), and Fl\_Widget::when().

**30.90.3.12 int Fl\_Text\_Editor::kf\_delete (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Does a delete of selected text or the current character in the current buffer.

References Fl\_Text\_Display::buffer(), Fl\_Widget::do\_callback(), FL\_WHEN\_CHANGED, Fl\_Text\_Display::insert\_position(), Fl\_Widget::set\_changed(), Fl\_Text\_Display::show\_insert\_position(), and Fl\_Widget::when().

**30.90.3.13 int Fl\_Text\_Editor::kf\_down (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Moves the text cursor one line down.

References FL\_Down, and kf\_move().

**30.90.3.14 int Fl\_Text\_Editor::kf\_end (int *c*, Fl\_Text\_Editor \* *e*) [static]**

Moves the text cursor to the end of the current line.

References FL\_End, and kf\_move().

**30.90.3.15 int Fl\_Text\_Editor::kf\_home (int, Fl\_Text\_Editor \* *e*) [static]**

Moves the text cursor to the beginning of the current line.

References FL\_Home, and kf\_move().

**30.90.3.16 int Fl\_Text\_Editor::kf\_insert (int c, Fl\_Text\_Editor \* e) [static]**

Toggles the insert mode in the text editor.

References `insert_mode()`.

**30.90.3.17 int Fl\_Text\_Editor::kf\_left (int c, Fl\_Text\_Editor \* e) [static]**

Moves the text cursor one character to the left.

References `FL_Left`, and `kf_move()`.

**30.90.3.18 int Fl\_Text\_Editor::kf\_move (int c, Fl\_Text\_Editor \* e) [static]**

Moves the text cursor in the direction indicated by key c.

References `Fl_Text_Display::buffer()`, `FL_Down`, `FL_End`, `FL_Home`, `FL_Left`, `FL_Page_Down`, `FL_Page_Up`, `FL_Right`, `FL_Up`, `Fl_Text_Display::insert_position()`, `Fl_Text_Display::move_down()`, `Fl_Text_Display::move_left()`, `Fl_Text_Display::move_right()`, `Fl_Text_Display::move_up()`, and `Fl_Text_Display::show_insert_position()`.

Referenced by `kf_down()`, `kf_end()`, `kf_home()`, `kf_left()`, `kf_page_down()`, `kf_page_up()`, `kf_right()`, `kf_shift_move()`, and `kf_up()`.

**30.90.3.19 int Fl\_Text\_Editor::kf\_page\_down (int c, Fl\_Text\_Editor \* e) [static]**

Moves the text cursor down one page.

References `FL_Page_Down`, and `kf_move()`.

**30.90.3.20 int Fl\_Text\_Editor::kf\_page\_up (int c, Fl\_Text\_Editor \* e) [static]**

Moves the text cursor up one page.

References `FL_Page_Up`, and `kf_move()`.

**30.90.3.21 int Fl\_Text\_Editor::kf\_paste (int c, Fl\_Text\_Editor \* e) [static]**

Does a paste of selected text in the current buffer.

References `Fl_Widget::do_callback()`, `FL_WHEN_CHANGED`, `Fl::paste()`, `Fl_Widget::set_changed()`, `Fl_Text_Display::show_insert_position()`, and `Fl_Widget::when()`.

**30.90.3.22 int Fl\_Text\_Editor::kf\_right (int c, Fl\_Text\_Editor \* e) [static]**

Moves the text cursor one character to the right.

References `FL_Right`, and `kf_move()`.

**30.90.3.23 int Fl\_Text\_Editor::kf\_select\_all (int c, Fl\_Text\_Editor \* e) [static]**

Selects all text in the current buffer.

References `Fl_Text_Display::buffer()`.

**30.90.3.24 int Fl\_Text\_Editor::kf\_shift\_move (int c, Fl\_Text\_Editor \* e) [static]**

Extends the current selection in the direction of key c.

References Fl\_Text\_Display::insert\_position(), and kf\_move().

**30.90.3.25 int Fl\_Text\_Editor::kf\_undo (int c, Fl\_Text\_Editor \* e) [static]**

Undo last edit in the current buffer.

Also deselect previous selection.

References Fl\_Text\_Display::buffer(), Fl\_Widget::do\_callback(), FL\_WHEN\_CHANGED, Fl\_Text\_Display::insert\_position(), Fl\_Widget::set\_changed(), Fl\_Text\_Display::show\_insert\_position(), and Fl\_Widget::when().

**30.90.3.26 int Fl\_Text\_Editor::kf\_up (int c, Fl\_Text\_Editor \* e) [static]**

Moves the text cursor one line up.

References FL\_Up, and kf\_move().

**30.90.3.27 void Fl\_Text\_Editor::remove\_all\_key\_bindings () [inline]**

Removes all of the key bindings associated with the text editor or list.

References remove\_all\_key\_bindings().

Referenced by remove\_all\_key\_bindings().

**30.90.3.28 void Fl\_Text\_Editor::remove\_all\_key\_bindings (Key\_Binding \*\* list)**

Removes all of the key bindings associated with the text editor or list.

References Fl\_Text\_Editor::Key\_Binding::next.

**30.90.3.29 void Fl\_Text\_Editor::remove\_key\_binding (int key, int state) [inline]**

Removes the key binding associated with the key "key" of state "state".

References remove\_key\_binding().

Referenced by remove\_key\_binding().

The documentation for this class was generated from the following files:

- [Fl\\_Text\\_Editor.H](#)
- [Fl\\_Text\\_Editor.cxx](#)

## 30.91 Fl\_Text\_Editor::Key\_Binding Struct Reference

Simple linked list associating a key/state to a function.

```
#include <Fl_Text_Editor.H>
```

### Public Attributes

- int **key**  
*the key pressed*
- int **state**  
*the state of key modifiers*
- **Key\_Func** function  
*associated function*
- **Key\_Binding** \* **next**  
*next key binding in the list*

### 30.91.1 Detailed Description

Simple linked list associating a key/state to a function.

The documentation for this struct was generated from the following file:

- [Fl\\_Text\\_Editor.H](#)

## 30.92 Fl\_Text\_Selection Class Reference

This is an internal class for [Fl\\_Text\\_Buffer](#) to manage text selections.

```
#include <Fl_Text_Buffer.H>
```

### Public Member Functions

- void **set** (int start, int end)
- void **set\_rectangular** (int start, int end, int rectStart, int rectEnd)
- void **update** (int pos, int nDeleted, int nInserted)

*Updates an individual selection for changes in the corresponding text.*

- char **rectangular** ()
- int **start** ()
- int **end** ()
- int **rect\_start** ()
- int **rect\_end** ()
- char **selected** ()

*Returns a non-zero number if any text has been selected, or 0 if no text is selected.*

- void **selected** (char b)
- int **includes** (int pos, int lineStartPos, int dispIndex)

*Return true if position pos with indentation dispIndex is in the [Fl\\_Text\\_Selection](#).*

- int **position** (int \*start, int \*end)
- int **position** (int \*start, int \*end, int \*isRect, int \*rectStart, int \*rectEnd)

### Protected Attributes

- char **mSelected**
- char **mRectangular**
- int **mStart**
- int **mEnd**
- int **mRectStart**
- int **mRectEnd**

### Friends

- class [Fl\\_Text\\_Buffer](#)

#### 30.92.1 Detailed Description

This is an internal class for [Fl\\_Text\\_Buffer](#) to manage text selections.

### Todo

members must be documented

The documentation for this class was generated from the following files:


- [Fl\\_Text\\_Buffer.H](#)
- [Fl\\_Text\\_Buffer.cxx](#)

## 30.93 Fl\_Tile Class Reference

The [Fl\\_Tile](#) class lets you resize the children by dragging the border between them:.

```
#include <Fl_Tile.H>
```

Inheritance diagram for [Fl\\_Tile](#):



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Tile](#) (int X, int Y, int W, int H, const char \*l=0)  
*Creates a new [Fl\\_Tile](#) widget using the given position, size, and label string.*
- void [resize](#) (int, int, int, int)  
*This resizes the [Fl\\_Group](#) widget and all of its children.*
- void [position](#) (int, int, int, int)  
*Drag the intersection at `from_x,from_y` to `to_x,to_y`.*

### 30.93.1 Detailed Description

The [Fl\\_Tile](#) class lets you resize the children by dragging the border between them:.




Figure 30.31: [Fl\\_Tile](#)

For the tiling to work correctly, the children of an [Fl\\_Tile](#) must cover the entire area of the widget, but not overlap. This means that all children must touch each other at their edges, and no gaps can't be left inside the [Fl\\_Tile](#).

`FL_Tile` does not normally draw any graphics of its own. The "borders" which can be seen in the snapshot above are actually part of the children. Their boxtypes have been set to `FL_DOWN_BOX` creating the impression of "ridges" where the boxes touch. What you see are actually two adjacent `FL_DOWN_BOX`'s drawn next to each other. All neighboring widgets share the same edge - the widget's thick borders make it appear as though the widgets aren't actually touching, but they are. If the edges of adjacent widgets do not touch, then it will be impossible to drag the corresponding edges.

`FL_Tile` allows objects to be resized to zero dimensions. To prevent this you can use the `resizable()` to limit where corners can be dragged to.

Even though objects can be resized to zero sizes, they must initially have non-zero sizes so the `FL_Tile` can figure out their layout. If desired, call `position()` after creating the children but before displaying the window to set the borders where you want.

Note on `resizable(Fl_Widget &w)` : The "resizable" child widget (which should be invisible) limits where the border can be dragged to. If you don't set it, it will be possible to drag the borders right to the edge, and thus resize objects on the edge to zero width or height. The `resizable()` widget is not resized by dragging any borders. See also void `Fl_Group::resizable(Fl_Widget &w)`

### 30.93.2 Constructor & Destructor Documentation

#### 30.93.2.1 `Fl_Tile::Fl_Tile (int X, int Y, int W, int H, const char *l = 0)` [inline]

Creates a new `Fl_Tile` widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the `Fl_Tile` and all of it's children can be automatic (local) variables, but you must declare the `Fl_Tile` first, so that it is destroyed last.

### 30.93.3 Member Function Documentation

#### 30.93.3.1 `int Fl_Tile::handle (int event)` [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

← `event` the kind of event received

#### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Group](#).

References `Fl_Widget::active()`, `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::do_callback()`, `Fl::event_x()`, `Fl::event_y()`, `FL_DRAG`, `FL_ENTER`, `FL_LEAVE`, `FL_MOVE`, `FL_PUSH`, `FL_RELEASE`, `Fl_Widget::h()`, `position()`, `Fl_Group::resizable()`, `Fl_Widget::set_changed()`, `Fl_Group::sizes()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

### 30.93.3.2 void Fl\_Tile::position (int *oix*, int *oiy*, int *newx*, int *newy*)

Drag the intersection at `from_x,from_y` to `to_x,to_y`.

This redraws all the necessary children.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::damage_resize()`, `Fl_Widget::h()`, `Fl_Group::resizable()`, `Fl_Group::sizes()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `handle()`.

### 30.93.3.3 void Fl\_Tile::resize (int *X*, int *Y*, int *W*, int *H*) [virtual]

This resizes the [Fl\\_Group](#) widget and all of its children.

The [Fl\\_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for `Fl_Group::resizable(Fl_Widget*)`

See also:

[Fl\\_Group::resizable\(Fl\\_Widget\\*\)](#)  
[Fl\\_Group::resizable\(\)](#)  
[Fl\\_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl\\_Group](#).

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::h()`, `Fl_Widget::resize()`, `Fl_Group::sizes()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

The documentation for this class was generated from the following files:


- [Fl\\_Tile.H](#)
- [Fl\\_Tile.cxx](#)

## 30.94 Fl\_Tiled\_Image Class Reference

This class supports tiling of images over a specified area.

```
#include <Fl_Tiled_Image.h>
```

Inheritance diagram for Fl\_Tiled\_Image::



### Public Member Functions

- [Fl\\_Tiled\\_Image \(Fl\\_Image \\*i, int W=0, int H=0\)](#)  
*The constructors create a new tiled image containing the specified image.*
- virtual [~Fl\\_Tiled\\_Image \(\)](#)  
*The destructor frees all memory and server resources that are used by the tiled image.*
- virtual [Fl\\_Image \\* copy \(int W, int H\)](#)  
*The [copy\(\)](#) method creates a copy of the specified image.*
- [Fl\\_Image \\* copy \(\)](#)  
*The [copy\(\)](#) method creates a copy of the specified image.*
- virtual void [color\\_average \(Fl\\_Color c, float i\)](#)  
*The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value c.*
- virtual void [desaturate \(\)](#)  
*The [desaturate\(\)](#) method converts an image to grayscale.*
- virtual void [draw \(int X, int Y, int W, int H, int cx, int cy\)](#)  
*The [draw\(\)](#) methods draw the image.*
- void [draw \(int X, int Y\)](#)  
*The [draw\(\)](#) methods draw the image.*
- [Fl\\_Image \\* image \(\)](#)  
*Gets The image that is shared.*

### Protected Attributes

- [Fl\\_Image \\* image\\_](#)
- int [alloc\\_image\\_](#)

### 30.94.1 Detailed Description

This class supports tiling of images over a specified area.

The source (tile) image is **not** copied unless you call the [color\\_average\(\)](#), [desaturate\(\)](#), or [inactive\(\)](#) methods.

### 30.94.2 Constructor & Destructor Documentation

#### 30.94.2.1 Fl\_Tiled\_Image::Fl\_Tiled\_Image (`Fl_Image * i, int W = 0, int H = 0`)

The constructors create a new tiled image containing the specified image.

Use a width and height of 0 to tile the whole window/widget.

References [Fl::h\(\)](#), [Fl\\_Image::h\(\)](#), [Fl::w\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [copy\(\)](#).

### 30.94.3 Member Function Documentation

#### 30.94.3.1 void Fl\_Tiled\_Image::color\_average (`Fl_Color c, float i`) [virtual]

The [color\\_average\(\)](#) method averages the colors in the image with the FLTK color value `c`.

The `i` argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::color\\_average\(\)](#), and [Fl\\_Image::copy\(\)](#).

#### 30.94.3.2 Fl\_Image\* Fl\_Tiled\_Image::copy () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [copy\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [copy\(\)](#).

#### 30.94.3.3 Fl\_Image \* Fl\_Tiled\_Image::copy (`int W, int H`) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl\\_Shared\\_Image](#), released) when you are done with it.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Tiled\\_Image\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

**30.94.3.4 void Fl\_Tiled\_Image::desaturate () [virtual]**

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::copy\(\)](#), and [Fl\\_Image::desaturate\(\)](#).

**30.94.3.5 void Fl\_Tiled\_Image::draw (int X, int Y) [inline]**

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl\\_Image](#).

References [draw\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

Referenced by [draw\(\)](#).

**30.94.3.6 void Fl\_Tiled\_Image::draw (int X, int Y, int W, int H, int cx, int cy) [virtual]**

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl\\_Image](#).

References [Fl\\_Image::draw\(\)](#), [fl\\_clip](#), [fl\\_pop\\_clip\(\)](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Tiled\\_Image.H](#)
- [Fl\\_Tiled\\_Image.cxx](#)

## 30.95 Fl\_Timer Class Reference

This is provided only to emulate the Forms Timer widget.

```
#include <Fl_Timer.H>
```

Inheritance diagram for Fl\_Timer::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- [Fl\\_Timer](#) (uchar t, int x, int y, int w, int h, const char \*l)  
*Creates a new [Fl\\_Timer](#) widget using the given type, position, size, and label string.*
- [~Fl\\_Timer](#) ()  
*Destroys the timer and removes the timeout.*
- void [value](#) (double)  
*Sets the current timer value.*
- double [value](#) () const  
*See void [Fl\\_Timer::value\(double\)](#).*
- char [direction](#) () const  
*Gets or sets the direction of the timer.*
- void [direction](#) (char d)  
*Gets or sets the direction of the timer.*
- char [suspended](#) () const  
*Gets or sets whether the timer is suspended.*
- void [suspended](#) (char d)  
*Gets or sets whether the timer is suspended.*

### Protected Member Functions

- void [draw](#) ()  
*Draw the widget.*

### 30.95.1 Detailed Description

This is provided only to emulate the Forms Timer widget.

It works by making a timeout callback every 1/5 second. This is wasteful and inaccurate if you just want something to happen a fixed time in the future. You should directly call [Fl::add\\_timeout\(\)](#) instead.

### 30.95.2 Constructor & Destructor Documentation

#### 30.95.2.1 `Fl_Timer::Fl_Timer (uchar t, int X, int Y, int W, int H, const char *l)`

Creates a new [Fl\\_Timer](#) widget using the given type, position, size, and label string.

The type parameter can be any of the following symbolic constants:

- `FL_NORMAL_TIMER` - The timer just does the callback and displays the string "Timer" in the widget.
- `FL_VALUE_TIMER` - The timer does the callback and displays the current timer value in the widget.
- `FL_HIDDEN_TIMER` - The timer just does the callback and does not display anything.

References `Fl_Widget::align()`, `Fl_Widget::box()`, `Fl_Widget::clear_visible()`, `FL_ALIGN_LEFT`, `FL_DOWN_BOX`, `Fl_Widget::selection_color()`, and `Fl_Widget::type()`.

### 30.95.3 Member Function Documentation

#### 30.95.3.1 `void Fl_Timer::direction (char d) [inline]`

Gets or sets the direction of the timer.

If the direction is zero then the timer will count up, otherwise it will count down from the initial [value\(\)](#).

#### 30.95.3.2 `char Fl_Timer::direction () const [inline]`

Gets or sets the direction of the timer.

If the direction is zero then the timer will count up, otherwise it will count down from the initial [value\(\)](#).

#### 30.95.3.3 `void Fl_Timer::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_label()`, `FL_ALIGN_CENTER`, `fl_color()`, `Fl_Widget::h()`, `Fl_Widget::labelcolor()`, `Fl_Widget::labelfont()`, `Fl_Widget::labelsize()`, `Fl_Widget::selection_color()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

**30.95.3.4 int Fl\_Timer::handle (int *event*) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References [FL\\_RELEASE](#), and [value\(\)](#).

**30.95.3.5 void Fl\_Timer::suspended (char *d*)**

Gets or sets whether the timer is suspended.

References [Fl::add\\_timeout\(\)](#), and [Fl::remove\\_timeout\(\)](#).

**30.95.3.6 char Fl\_Timer::suspended () const [inline]**

Gets or sets whether the timer is suspended.

The documentation for this class was generated from the following files:


- [Fl\\_Timer.H](#)
- [forms\\_timer.cxx](#)

## 30.96 Fl\_Toggle\_Button Class Reference

The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off.

```
#include <Fl_Toggle_Button.H>
```

Inheritance diagram for Fl\_Toggle\_Button::



### Public Member Functions

- [Fl\\_Toggle\\_Button \(int X, int Y, int W, int H, const char \\*l=0\)](#)

*Creates a new Fl\_Toggle\_Button widget using the given position, size, and label string.*

### 30.96.1 Detailed Description

The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off.

The [Fl\\_Toggle\\_Button](#) subclass displays the "on" state by drawing a pushed-in button.

Buttons generate callbacks when they are clicked by the user. You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

### 30.96.2 Constructor & Destructor Documentation

#### 30.96.2.1 Fl\_Toggle\_Button::Fl\_Toggle\_Button (int X, int Y, int W, int H, const char \* l = 0) [inline]

Creates a new [Fl\\_Toggle\\_Button](#) widget using the given position, size, and label string.

The inherited destructor deletes the toggle button.

References [FL\\_TOGGLE\\_BUTTON](#), and [Fl\\_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl\\_Toggle\\_Button.H](#)

## 30.97 Fl\_Tooltip Class Reference

The [Fl\\_Tooltip](#) class provides tooltip support for all FLTK widgets.

```
#include <Fl_Tooltip.H>
```

### Static Public Member Functions

- static float [delay](#) ()  
*Gets the tooltip delay.*
- static void [delay](#) (float f)  
*Sets the tooltip delay.*
- static float [hoverdelay](#) ()  
*Gets the tooltip hover delay, the delay between tooltips.*
- static void [hoverdelay](#) (float f)  
*Sets the tooltip hover delay, the delay between tooltips.*
- static int [enabled](#) ()  
*Returns non-zero if tooltips are enabled.*
- static void [enable](#) (int b=1)  
*Enables tooltips on all widgets (or disables if b is false).*
- static void [disable](#) ()  
*Same as enable(0), disables tooltips on all widgets.*
- static void [enter\\_area](#) (Fl\_Widget \*w, int X, int Y, int W, int H, const char \*tip)  
*You may be able to use this to provide tooltips for internal pieces of your widget.*
- static Fl\_Widget \* [current](#) ()  
*Gets the current widget target.*
- static void [current](#) (Fl\_Widget \*)  
*Sets the current widget target.*
- static Fl\_Font [font](#) ()  
*Gets the typeface for the tooltip text.*
- static void [font](#) (Fl\_Font i)  
*Sets the typeface for the tooltip text.*
- static Fl\_Fontsize [size](#) ()  
*Gets the size of the tooltip text.*
- static void [size](#) (Fl\_Fontsize s)  
*Sets the size of the tooltip text.*

- static [Fl\\_Color color \(\)](#)  
*Gets the background color for tooltips.*
- static void [color \(unsigned c\)](#)  
*Sets the background color for tooltips.*
- static [Fl\\_Color textcolor \(\)](#)  
*Gets the color of the text in the tooltip.*
- static void [textcolor \(unsigned c\)](#)  
*Sets the color of the text in the tooltip.*

## Static Public Attributes

- static void(\* [enter](#))([Fl\\_Widget](#) \*w) = nothing
- static void(\* [exit](#))([Fl\\_Widget](#) \*w) = nothing

## Friends

- void [Fl\\_Widget::tooltip](#) (const char \*)

### 30.97.1 Detailed Description

The [Fl\\_Tooltip](#) class provides tooltip support for all FLTK widgets.

It contains only static methods.

### 30.97.2 Member Function Documentation

#### 30.97.2.1 static void [Fl\\_Tooltip::color \(unsigned c\)](#) [inline, static]

Sets the background color for tooltips.

The default background color is a pale yellow.

#### 30.97.2.2 static [Fl\\_Color Fl\\_Tooltip::color \(\)](#) [inline, static]

Gets the background color for tooltips.

The default background color is a pale yellow.

#### 30.97.2.3 void [Fl\\_Tooltip::current \(Fl\\_Widget \\* w\)](#) [static]

Sets the current widget target.

Acts as though enter(widget) was done but does not pop up a tooltip. This is useful to prevent a tooltip from reappearing when a modal overlapping window is deleted. FLTK does this automatically when you click the mouse button.

References [Fl\\_Widget::parent\(\)](#), and [Fl\\_Widget::tooltip\(\)](#).

**30.97.2.4 static void Fl\_Tooltip::delay (float *f*) [inline, static]**

Sets the tooltip delay.

The default delay is 1.0 seconds.

**30.97.2.5 static float Fl\_Tooltip::delay () [inline, static]**

Gets the tooltip delay.

The default delay is 1.0 seconds.

Referenced by enter\_area().

**30.97.2.6 static void Fl\_Tooltip::disable () [inline, static]**

Same as enable(0), disables tooltips on all widgets.

Referenced by Fl::arg().

**30.97.2.7 static void Fl\_Tooltip::enable (int *b* = 1) [inline, static]**

Enables tooltips on all widgets (or disables if *b* is false).

Referenced by Fl::arg(), and Fl\_Window::show().

**30.97.2.8 static int Fl\_Tooltip::enabled () [inline, static]**

Returns non-zero if tooltips are enabled.

Referenced by enter\_area().

**30.97.2.9 void Fl\_Tooltip::enter\_area (Fl\_Widget \* *wid*, int *x*, int *y*, int *w*, int *h*, const char \* *t*) [static]**

You may be able to use this to provide tooltips for internal pieces of your widget.

Call this after setting [Fl::belowmouse\(\)](#) to your widget (because that calls the above enter() method). Then figure out what thing the mouse is pointing at, and call this with the widget (this pointer is used to remove the tooltip if the widget is deleted or hidden, and to locate the tooltip), the rectangle surrounding the area, relative to the top-left corner of the widget (used to calculate where to put the tooltip), and the text of the tooltip (which must be a pointer to static data as it is not copied).

References Fl::add\_timeout(), delay(), enabled(), hoverdelay(), and Fl::remove\_timeout().

**30.97.2.10 static void Fl\_Tooltip::font (Fl\_Font *i*) [inline, static]**

Sets the typeface for the tooltip text.

**30.97.2.11 static Fl\_Font Fl\_Tooltip::font () [inline, static]**

Gets the typeface for the tooltip text.

**30.97.2.12 static void Fl\_Tooltip::hoverdelay (float *f*) [inline, static]**

Sets the tooltip hover delay, the delay between tooltips.

The default delay is 0.2 seconds.

**30.97.2.13 static float Fl\_Tooltip::hoverdelay () [inline, static]**

Gets the tooltip hover delay, the delay between tooltips.

The default delay is 0.2 seconds.

Referenced by enter\_area().

**30.97.2.14 static void Fl\_Tooltip::size (Fl\_Fontsize *s*) [inline, static]**

Sets the size of the tooltip text.

**30.97.2.15 static Fl\_Fontsize Fl\_Tooltip::size () [inline, static]**

Gets the size of the tooltip text.

**30.97.2.16 static void Fl\_Tooltip::textcolor (unsigned *c*) [inline, static]**

Sets the color of the text in the tooltip.

The default is black.

**30.97.2.17 static Fl\_Color Fl\_Tooltip::textcolor () [inline, static]**

Gets the color of the text in the tooltip.

The default is black.

The documentation for this class was generated from the following files:


- [Fl\\_Tooltip.H](#)
- Fl.cxx
- Fl\_Tooltip.cxx

## 30.98 Fl\_Valuator Class Reference

The [Fl\\_Valuator](#) class controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object.

```
#include <Fl_Valuator.h>
```

Inheritance diagram for Fl\_Valuator::

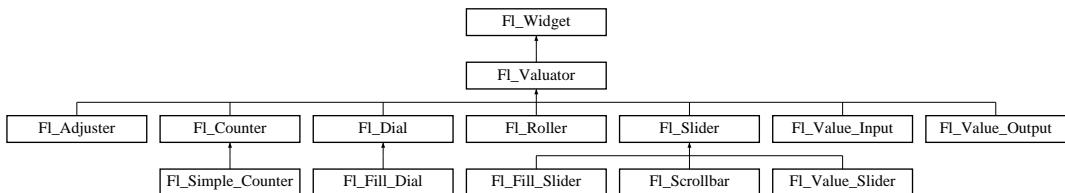

### Public Member Functions

- void [bounds](#) (double a, double b)  
*Sets the minimum (a) and maximum (b) values for the valuator widget.*
- double [minimum](#) () const  
*Gets the minimum value for the valuator.*
- void [minimum](#) (double a)  
*Sets the minimum value for the valuator.*
- double [maximum](#) () const  
*Gets the maximum value for the valuator.*
- void [maximum](#) (double a)  
*Sets the maximum value for the valuator.*
- void [range](#) (double a, double b)  
*Sets the minimum and maximum values for the valuator.*
- void [step](#) (int a)  
*See double [Fl\\_Valuator::step\(\)](#) const.*
- void [step](#) (double a, int b)  
*See double [Fl\\_Valuator::step\(\)](#) const.*
- void [step](#) (double s)  
*See double [Fl\\_Valuator::step\(\)](#) const.*
- double [step](#) () const  
*Gets or sets the step value.*
- void [precision](#) (int)  
*Sets the step value to  $1/10^{digits}$ .*

- **double value () const**  
*Gets the floating point(double) value.*
- **int value (double)**  
*Sets the current value.*
- **virtual int format (char \*)**  
*Uses internal rules to format the fields numerical value into the character array pointed to by the passed parameter.*
- **double round (double)**  
*Round the passed value to the nearest step increment.*
- **double clamp (double)**  
*Clamps the passed value to the valuator range.*
- **double increment (double, int)**  
*Adds n times the step value to the passed value.*

## Protected Member Functions

- **int horizontal () const**  
*Tells if the valuator is an FL\_HORIZONTAL one.*
- **FL\_Valuator (int X, int Y, int W, int H, const char \*L)**  
*Creates a new [FL\\_Valuator](#) widget using the given position, size, and label string.*
- **double previous\_value () const**  
*Gets the previous floating point value before an event changed it.*
- **void handle\_push ()**  
*Stores the current value in the previous value.*
- **double softclamp (double)**  
*Clamps the value, but accepts v if the previous value is not already out of range.*
- **void handle\_drag (double newvalue)**  
*Called during a drag operation, after an FL\_WHEN\_CHANGED event is received and before the callback.*
- **void handle\_release ()**  
*Called after an FL\_WHEN\_RELEASE event is received and before the callback.*
- **virtual void value\_damage ()**  
*Asks for partial redraw.*
- **void set\_value (double v)**  
*Sets the current floating point value.*

### 30.98.1 Detailed Description

The [Fl\\_Valuator](#) class controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object.

There are probably more of these classes in FLTK than any others:

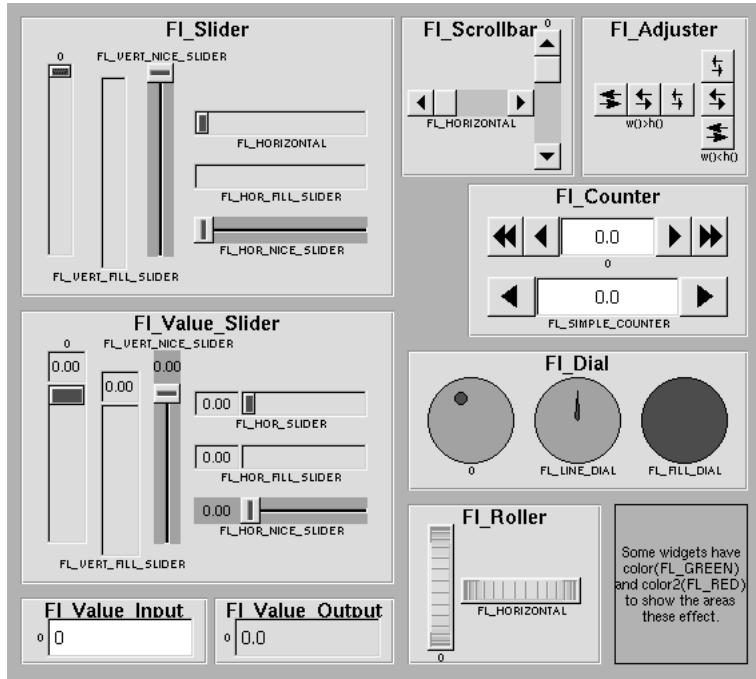


Figure 30.32: Valuators derived from Fl\_Valuator

In the above diagram each box surrounds an actual subclass. These are further differentiated by setting the [type\(\)](#) of the widget to the symbolic value labeling the widget. The ones labelled "0" are the default versions with a type(0). For consistency the symbol FL\_VERTICAL is defined as zero.

### 30.98.2 Constructor & Destructor Documentation

#### 30.98.2.1 [Fl\\_Valuator::Fl\\_Valuator \(int X, int Y, int W, int H, const char \\* L\)](#) [protected]

Creates a new [Fl\\_Valuator](#) widget using the given position, size, and label string.

The default boxtyle is FL\_NO\_BOX.

References [Fl\\_Widget::align\(\)](#), [FL\\_ALIGN\\_BOTTOM](#), [FL\\_WHEN\\_CHANGED](#), and [Fl\\_Widget::when\(\)](#).

### 30.98.3 Member Function Documentation

#### 30.98.3.1 [void Fl\\_Valuator::bounds \(double a, double b\)](#) [inline]

Sets the minimum (a) and maximum (b) values for the valuator widget.

Reimplemented in [Fl\\_Slider](#).

Referenced by Fl\_Counter::Fl\_Counter().

### 30.98.3.2 double Fl\_Valuator::clamp (double v)

Clamps the passed value to the valuator range.

Referenced by Fl\_Value\_Output::handle(), Fl\_Value\_Input::handle(), Fl\_Scrollbar::handle(), Fl\_Roller::handle(), Fl\_Dial::handle(), Fl\_Counter::handle(), and Fl\_Adjuster::handle().

### 30.98.3.3 int Fl\_Valuator::format (char \* buffer) [virtual]

Uses internal rules to format the fields numerical value into the character array pointed to by the passed parameter.

The actual format used depends on the current step value. If the step value has been set to zero then a g format is used. If the step value is non-zero, then a %.\*f format is used, where the precision is calculated to show sufficient digits for the current step value. An integer step value, such as 1 or 1.0, gives a precision of 0, so the formatted value will appear as an integer.

This method is used by the Fl\_Value.... group of widgets to format the current value into a text string. The return value is the length of the formatted text. The formatted value is written into in *buffer*. *buffer* should have space for at least 128 bytes.

You may override this function to create your own text formatting.

References value().

Referenced by Fl\_Value\_Slider::draw(), Fl\_Value\_Output::draw(), and Fl\_Counter::draw().

### 30.98.3.4 void Fl\_Valuator::handle\_drag (double v) [protected]

Called during a drag operation, after an FL\_WHEN\_CHANGED event is received and before the callback.

References Fl\_Widget::do\_callback(), FL\_WHEN\_CHANGED, Fl\_Widget::set\_changed(), value\_damage(), and Fl\_Widget::when().

Referenced by Fl\_Value\_Output::handle(), Fl\_Value\_Input::handle(), Fl\_Scrollbar::handle(), Fl\_Roller::handle(), Fl\_Dial::handle(), Fl\_Counter::handle(), and Fl\_Adjuster::handle().

### 30.98.3.5 void Fl\_Valuator::handle\_release () [protected]

Called after an FL\_WHEN\_RELEASE event is received and before the callback.

References Fl\_Widget::clear\_changed(), Fl\_Widget::do\_callback(), FL\_WHEN\_NOT\_CHANGED, FL\_WHEN\_RELEASE, and Fl\_Widget::when().

Referenced by Fl\_Value\_Output::handle(), Fl\_Value\_Input::handle(), Fl\_Scrollbar::handle(), Fl\_Roller::handle(), Fl\_Dial::handle(), Fl\_Counter::handle(), and Fl\_Adjuster::handle().

### 30.98.3.6 double Fl\_Valuator::increment (double v, int n)

Adds n times the step value to the passed value.

If step was set to zero it uses fabs(maximum() - minimum()) / 100.

Referenced by Fl\_Value\_Output::handle(), Fl\_Value\_Input::handle(), Fl\_Roller::handle(), Fl\_Counter::handle(), and Fl\_Adjuster::handle().

**30.98.3.7 void Fl\_Valuator::maximum (double *a*) [inline]**

Sets the maximum value for the valuator.

**30.98.3.8 double Fl\_Valuator::maximum () const [inline]**

Gets the maximum value for the valuator.

Referenced by Fl\_Slider::bounds(), Fl\_Dial::draw(), Fl\_Scrollbar::handle(), and Fl\_Dial::handle().

**30.98.3.9 void Fl\_Valuator::minimum (double *a*) [inline]**

Sets the minimum value for the valuator.

**30.98.3.10 double Fl\_Valuator::minimum () const [inline]**

Gets the minimum value for the valuator.

Referenced by Fl\_Slider::bounds(), Fl\_Dial::draw(), Fl\_Scrollbar::handle(), and Fl\_Dial::handle().

**30.98.3.11 void Fl\_Valuator::precision (int *p*)**

Sets the step value to  $1/10^{\text{digits}}$ .

**30.98.3.12 void Fl\_Valuator::range (double *a*, double *b*) [inline]**

Sets the minimum and maximum values for the valuator.

When the user manipulates the widget, the value is limited to this range. This clamping is done *after* rounding to the step value (this makes a difference if the range is not a multiple of the step).

The minimum may be greater than the maximum. This has the effect of "reversing" the object so the larger values are in the opposite direction. This also switches which end of the filled sliders is filled.

Some widgets consider this a "soft" range. This means they will stop at the range, but if the user releases and grabs the control again and tries to move it further, it is allowed.

The range may affect the display. You must [redraw\(\)](#) the widget after changing the range.

**30.98.3.13 double Fl\_Valuator::round (double *v*)**

Round the passed value to the nearest step increment.

Does nothing if step is zero.

Referenced by Fl\_Value\_Output::handle(), Fl\_Value\_Input::handle(), Fl\_Roller::handle(), and Fl\_Dial::handle().

**30.98.3.14 void Fl\_Valuator::set\_value (double *v*) [inline, protected]**

Sets the current floating point value.

**30.98.3.15 double Fl\_Valuator::step () const [inline]**

Gets or sets the step value.

As the user moves the mouse the value is rounded to the nearest multiple of the step value. This is done *before* clamping it to the range. For most widgets the default step is zero.

For precision the step is stored as the ratio of two integers, A/B. You can set these integers directly. Currently setting a floating point value sets the nearest A/1 or 1/B value possible.

Referenced by Fl\_Roller::draw(), Fl\_Adjuster::Fl\_Adjuster(), Fl\_Counter::Fl\_Counter(), Fl\_Roller::Fl\_Roller(), Fl\_Scrollbar::Fl\_Scrollbar(), Fl\_Value\_Slider::Fl\_Value\_Slider(), Fl\_Value\_Output::handle(), Fl\_Value\_Input::handle(), Fl\_Slider::scrollvalue(), and Fl\_Counter::step().

**30.98.3.16 int Fl\_Valuator::value (double v)**

Sets the current value.

The new value is *not* clamped or otherwise changed before storing it. Use [clamp\(\)](#) or [round\(\)](#) to modify the value before calling [value\(\)](#). The widget is redrawn if the new value is different than the current one. The initial value is zero.

[changed\(\)](#) will return true if the user has moved the slider, but it will be turned off by [value\(x\)](#) and just before doing a callback (the callback can turn it back on if desired).

References Fl\_Widget::clear\_changed(), and [value\\_damage\(\)](#).

**30.98.3.17 double Fl\_Valuator::value () const [inline]**

Gets the floating point(double) value.

See int [value\(double\)](#)

Referenced by Fl\_Roller::draw(), Fl\_Dial::draw(), format(), Fl\_Value\_Input::handle(), Fl\_Roller::handle(), Fl\_Dial::handle(), Fl\_Counter::handle(), Fl\_Adjuster::handle(), Fl\_Slider::scrollvalue(), and Fl\_Scrollbar::value().

The documentation for this class was generated from the following files:


- [Fl\\_Valuator.H](#)
- [Fl\\_Valuator.cxx](#)

## 30.99 Fl\_Value\_Input Class Reference

The [Fl\\_Value\\_Input](#) widget displays a numeric value.

```
#include <Fl_Value_Input.h>
```

Inheritance diagram for [Fl\\_Value\\_Input](#):



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- void [draw](#) ()  
*Draw the widget.*
- void [resize](#) (int x, int y, int w, int h, const char \*l=0)  
*Change the size or position of the widget.*
- [Fl\\_Value\\_Input](#) (int x, int y, int w, int h, const char \*l=0)  
*Creates a new [Fl\\_Value\\_Input](#) widget using the given position, size, and label string.*
- void [soft](#) (char s)  
*See void [Fl\\_Value\\_Input::soft\(char s\)](#).*
- char [soft](#) () const  
*If "soft" is turned on, the user is allowed to drag the value outside the range.*
- int [shortcut](#) () const  
*The first form returns the current shortcut key for the Input.*
- void [shortcut](#) (int s)  
*See int [Fl\\_Value\\_Input::shortcut\(\) const](#).*
- [Fl\\_Font](#) [textfont](#) () const  
*Gets the typeface of the text in the value box.*
- void [textfont](#) ([Fl\\_Font](#) s)  
*Sets the typeface of the text in the value box.*
- [Fl\\_Fontsize](#) [textsize](#) () const  
*Gets the size of the text in the value box.*

- void `textsize (Fl_Fontsize s)`

*Sets the size of the text in the value box.*

- `Fl_Color textcolor () const`

*Gets the color of the text in the value box.*

- void `textcolor (unsigned n)`

*Sets the color of the text in the value box.*

- `Fl_Color cursor_color () const`

*Gets the color of the text cursor.*

- void `cursor_color (unsigned n)`

*Sets the color of the text cursor.*

## Public Attributes

- `Fl_Input input`

### 30.99.1 Detailed Description

The `Fl_Value_Input` widget displays a numeric value.

The user can click in the text field and edit it - there is in fact a hidden `Fl_Input` widget with type(`FL_FLOAT_INPUT`) or type(`FL_INT_INPUT`) in there - and when they hit return or tab the value updates to what they typed and the callback is done.

If `step()` is non-zero and integral, then the range of numbers is limited to integers instead of floating point numbers. As well as displaying the value as an integer, typed input is also limited to integer values, even if the hidden `Fl_Input` widget is of type(`FL_FLOAT_INPUT`).

If `step()` is non-zero, the user can also drag the mouse across the object and thus slide the value. The left button moves one `step()` per pixel, the middle by 10 `step()`, and the right button by 100 \* `step()`. It is therefore impossible to select text by dragging across it, although clicking can still move the insertion cursor.

If `step()` is non-zero and integral, then the range of numbers are limited to integers instead of floating point values.



Figure 30.33: Fl\_Value\_Input

## 30.99.2 Constructor & Destructor Documentation

### 30.99.2.1 Fl\_Value\_Input::Fl\_Value\_Input (int X, int Y, int W, int H, const char \* l = 0)

Creates a new [Fl\\_Value\\_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

References [Fl\\_Widget::align\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::callback\(\)](#), [Fl\\_Widget::color\(\)](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_WHEN\\_CHANGED](#), [Fl\\_Widget::parent\(\)](#), [Fl\\_Widget::selection\\_color\(\)](#), [Fl\\_Widget::set\\_flag\(\)](#), [Fl\\_Widget::SHORTCUT\\_LABEL](#), and [Fl\\_Widget::when\(\)](#).

## 30.99.3 Member Function Documentation

### 30.99.3.1 void Fl\_Value\_Input::cursor\_color (unsigned n) [inline]

Sets the color of the text cursor.

The text cursor is black by default.

### 30.99.3.2 Fl\_Color Fl\_Value\_Input::cursor\_color () const [inline]

Gets the color of the text cursor.

The text cursor is black by default.

### 30.99.3.3 void Fl\_Value\_Input::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References [Fl\\_Widget::box\(\)](#), [Fl\\_Widget::clear\\_damage\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Input::draw\(\)](#), and [Fl\\_Widget::selection\\_color\(\)](#).

### 30.99.3.4 int Fl\_Value\_Input::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

#### Parameters:

$\leftarrow \text{event}$  the kind of event received

#### Return values:

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

#### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Valuator::clamp\(\)](#), [Fl::event\\_button\(\)](#), [Fl::event\\_is\\_click\(\)](#), [Fl::event\\_x\\_root\(\)](#), [FL\\_DRAG](#), [FL\\_FOCUS](#), [FL\\_PUSH](#), [FL\\_RELEASE](#), [FL\\_SHORTCUT](#), [Fl\\_Input::handle\(\)](#), [Fl\\_Valuator::handle\\_drag\(\)](#), [Fl\\_Valuator::handle\\_push\(\)](#), [Fl\\_Valuator::handle\\_release\(\)](#), [Fl\\_Valuator::increment\(\)](#), [Fl\\_Valuator::previous\\_value\(\)](#), [Fl\\_Valuator::round\(\)](#), [soft\(\)](#), [Fl\\_Valuator::softclamp\(\)](#), [Fl\\_Valuator::step\(\)](#), [Fl\\_Widget::take\\_focus\(\)](#), [Fl\\_Widget::type\(\)](#), [Fl\\_Valuator::value\(\)](#), and [Fl\\_Widget::when\(\)](#).

### 30.99.3.5 void Fl\_Value\_Input::resize (int *x*, int *y*, int *w*, int *h*) [virtual]

Change the size or position of the widget.

This is a virtual function so that the widget may implement its own handling of resizing. The default version does *not* call the [redraw\(\)](#) method, but instead relies on the parent widget to do so because the parent may know a faster way to update the display, such as scrolling from the old position.

Some window managers under X11 call [resize\(\)](#) a lot more often than needed. Please verify that the position or size of a widget did actually change before doing any extensive calculations.

`position(x,y)` is a shortcut for `resize(x,y,w(),h())`, and `size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

**Parameters:**

← *x,y* new position relative to the parent window  
← *w,h* new size

**See also:**

[position\(int, int\)](#), [size\(int, int\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Input\\_::resize\(\)](#).

**30.99.3.6 int Fl\_Value\_Input::shortcut () const [inline]**

The first form returns the current shortcut key for the Input.

The second form sets the shortcut key to key. Setting this overrides the use of '&' in the [label\(\)](#). The value is a bitwise OR of a key and a set of shift flags, for example `FL_ALT | 'a'`, `FL_ALT | (FL_F + 10)`, or just '`a`'. A value of 0 disables the shortcut.

The key can be any value returned by [Fl::event\\_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event\\_state\(\)](#). If the bit is on that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

**30.99.3.7 char Fl\_Value\_Input::soft () const [inline]**

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. The default is true.

Referenced by [handle\(\)](#).

**30.99.3.8 void Fl\_Value\_Input::textcolor (unsigned *n*) [inline]**

Sets the color of the text in the value box.

**30.99.3.9 Fl\_Color Fl\_Value\_Input::textcolor () const [inline]**

Gets the color of the text in the value box.

**30.99.3.10 void Fl\_Value\_Input::textfont (Fl\_Font *s*) [inline]**

Sets the typeface of the text in the value box.

**30.99.3.11 Fl\_Font Fl\_Value\_Input::textfont () const [inline]**

Gets the typeface of the text in the value box.

**30.99.3.12 void Fl\_Value\_Input::textsize (Fl\_Fontsize s) [inline]**

Sets the size of the text in the value box.

**30.99.3.13 Fl\_Fontsize Fl\_Value\_Input::textsize () const [inline]**

Gets the size of the text in the value box.

The documentation for this class was generated from the following files:


- [Fl\\_Value\\_Input.H](#)
- [Fl\\_Value\\_Input.cxx](#)

## 30.100 Fl\_Value\_Output Class Reference

The [Fl\\_Value\\_Output](#) widget displays a floating point value.

```
#include <Fl_Value_Output.H>
```

Inheritance diagram for Fl\_Value\_Output::



### Public Member Functions

- int [handle](#) (int)  
*Handles the specified event.*
- void [draw](#) ()  
*Draw the widget.*
- [Fl\\_Value\\_Output](#) (int x, int y, int w, int h, const char \*l=0)  
*Creates a new [Fl\\_Value\\_Output](#) widget using the given position, size, and label string.*
- void [soft](#) (uchar s)  
*If "soft" is turned on, the user is allowed to drag the value outside the range.*
- uchar [soft](#) () const  
*If "soft" is turned on, the user is allowed to drag the value outside the range.*
- [Fl\\_Font textfont](#) () const  
*Gets the typeface of the text in the value box.*
- void [textfont](#) ([Fl\\_Font](#) s)  
*Sets the typeface of the text in the value box.*
- [Fl\\_Fontsize fontsize](#) () const  
*Gets the size of the text in the value box.*
- void [fontsize](#) ([Fl\\_Fontsize](#) s)  
• [Fl\\_Color textcolor](#) () const  
*Sets the color of the text in the value box.*
- void [textcolor](#) (unsigned s)  
*Gets the color of the text in the value box.*

### 30.100.1 Detailed Description

The [Fl\\_Value\\_Output](#) widget displays a floating point value.

If `step()` is not zero, the user can adjust the value by dragging the mouse left and right. The left button moves one `step()` per pixel, the middle by  $10 * \text{step}()$ , and the right button by  $100 * \text{step}()$ .

This is much lighter-weight than [Fl\\_Value\\_Input](#) because it contains no text editing code or character buffer.

Figure 30.34: Fl\_Value\_Output

### 30.100.2 Constructor & Destructor Documentation

#### 30.100.2.1 `Fl_Value_Output::Fl_Value_Output (int X, int Y, int W, int H, const char * l = 0)`

Creates a new [Fl\\_Value\\_Output](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

Inherited destructor destroys the Valuator.

References `Fl_Widget::align()`, `Fl_Widget::box()`, `FL_ALIGN_LEFT`, `FL_FOREGROUND_COLOR`, `FL_HELVETICA`, `FL_NO_BOX`, and `FL_NORMAL_SIZE`.

### 30.100.3 Member Function Documentation

#### 30.100.3.1 void Fl\_Value\_Output::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl\\_Widget](#).

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::color()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `FL_ALIGN_LEFT`, `fl_color()`, `FL_DOWN_BOX`, `fl_rectf()`, `Fl_Valuator::format()`, `Fl_Widget::h()`, `textcolor()`, `textfont()`, `textsize()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

#### 30.100.3.2 int Fl\_Value\_Output::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

##### Parameters:

← *event* the kind of event received

##### Return values:

**0** if the event was not used or understood

**1** if the event was used and can be deleted

##### See also:

[Fl\\_Event](#)

Reimplemented from [Fl\\_Widget](#).

References `Fl_Valuator::clamp()`, `Fl::event_button()`, `Fl::event_x()`, `FL_DRAG`, `FL_ENTER`, `FL_LEAVE`, `FL_PUSH`, `FL_RELEASE`, `Fl_Valuator::handle_drag()`, `Fl_Valuator::handle_push()`, `Fl_Valuator::handle_release()`, `Fl_Valuator::increment()`, `Fl_Valuator::previous_value()`, `Fl_Valuator::round()`, `soft()`, `Fl_Valuator::softclamp()`, and `Fl_Valuator::step()`.

#### 30.100.3.3 uchar Fl\_Value\_Output::soft () const [inline]

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

Referenced by [handle\(\)](#).

**30.100.3.4 void Fl\_Value\_Output::soft (uchar s) [inline]**

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

**30.100.3.5 void Fl\_Value\_Output::textcolor (unsigned s) [inline]**

Gets the color of the text in the value box.

**30.100.3.6 Fl\_Color Fl\_Value\_Output::textcolor () const [inline]**

Sets the color of the text in the value box.

Referenced by draw().

**30.100.3.7 void Fl\_Value\_Output::textfont (Fl\_Font s) [inline]**

Sets the typeface of the text in the value box.

**30.100.3.8 Fl\_Font Fl\_Value\_Output::textfont () const [inline]**

Gets the typeface of the text in the value box.

Referenced by draw().

**30.100.3.9 Fl\_Fontsize Fl\_Value\_Output::textsize () const [inline]**

Gets the size of the text in the value box.

Referenced by draw().

The documentation for this class was generated from the following files:


- [Fl\\_Value\\_Output.H](#)
- [Fl\\_Value\\_Output.cxx](#)

## 30.101 Fl\_Value\_Slider Class Reference

The [Fl\\_Value\\_Slider](#) widget is a [Fl\\_Slider](#) widget with a box displaying the current value.

```
#include <Fl_Value_Slider.H>
```

Inheritance diagram for Fl\_Value\_Slider::



### Public Member Functions

- void [draw \(\)](#)

*Draw the widget.*

- int [handle \(int\)](#)

*Handles the specified event.*

- [Fl\\_Value\\_Slider \(int x, int y, int w, int h, const char \\*l=0\)](#)

*Creates a new [Fl\\_Value\\_Slider](#) widget using the given position, size, and label string.*

- [Fl\\_Font textfont \(\) const](#)

*Gets the typeface of the text in the value box.*

- void [textfont \(Fl\\_Font s\)](#)

*Sets the typeface of the text in the value box.*

- [Fl\\_Fontsize textsize \(\) const](#)

*Gets the size of the text in the value box.*

- void [textsize \(Fl\\_Fontsize s\)](#)

*Sets the size of the text in the value box.*

- [Fl\\_Color textcolor \(\) const](#)

*Gets the color of the text in the value box.*

- void [textcolor \(unsigned s\)](#)

*Sets the color of the text in the value box.*

### 30.101.1 Detailed Description

The [Fl\\_Value\\_Slider](#) widget is a [Fl\\_Slider](#) widget with a box displaying the current value.

Figure 30.35: Fl\_Value\_Slider

### 30.101.2 Constructor & Destructor Documentation

#### 30.101.2.1 [Fl\\_Value\\_Slider::Fl\\_Value\\_Slider \(int X, int Y, int W, int H, const char \\*l = 0\)](#)

Creates a new [Fl\\_Value\\_Slider](#) widget using the given position, size, and label string.

The default boxtyle is FL\_DOWN\_BOX.

References FL\_FOREGROUND\_COLOR, FL\_HELVETICA, and [Fl\\_Valuator::step\(\)](#).

### 30.101.3 Member Function Documentation

#### 30.101.3.1 [void Fl\\_Value\\_Slider::draw \(\) \[virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Slider](#).

References [Fl\\_Widget::active\\_r\(\)](#), [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::damage\(\)](#), [Fl\\_Widget::draw\\_box\(\)](#), [FL\\_ALIGN\\_CLIP](#), [fl\\_color\(\)](#), [Fl\\_Valuator::format\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Valuator::horizontal\(\)](#), [textcolor\(\)](#), [textfont\(\)](#), [textsize\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

#### 30.101.3.2 [int Fl\\_Value\\_Slider::handle \(int event\) \[virtual\]](#)

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

**0** if the event was not used or understood

**1** if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Slider](#).

References [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [FL\\_PUSH](#), [Fl::focus\(\)](#), [Fl\\_Widget::h\(\)](#), [Fl\\_Valuator::horizontal\(\)](#), [Fl\\_Widget::redraw\(\)](#), [Fl::visible\\_focus\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

### 30.101.3.3 void Fl\_Value\_Slider::textcolor (unsigned *s*) [inline]

Sets the color of the text in the value box.

### 30.101.3.4 Fl\_Color Fl\_Value\_Slider::textcolor () const [inline]

Gets the color of the text in the value box.

Referenced by [draw\(\)](#).

### 30.101.3.5 void Fl\_Value\_Slider::textfont (Fl\_Font *s*) [inline]

Sets the typeface of the text in the value box.

### 30.101.3.6 Fl\_Font Fl\_Value\_Slider::textfont () const [inline]

Gets the typeface of the text in the value box.

Referenced by [draw\(\)](#).

### 30.101.3.7 void Fl\_Value\_Slider::textsize (Fl\_Fontsize *s*) [inline]

Sets the size of the text in the value box.

### 30.101.3.8 Fl\_Fontsize Fl\_Value\_Slider::textsize () const [inline]

Gets the size of the text in the value box.

Referenced by draw().

The documentation for this class was generated from the following files:


- [Fl\\_Value\\_Slider.H](#)
- [Fl\\_Value\\_Slider.cxx](#)

## 30.102 Fl\_Widget Class Reference

[Fl\\_Widget](#) is the base class for all widgets in FLTK.

```
#include <Fl_Widget.h>
```

Inheritance diagram for Fl\_Widget::

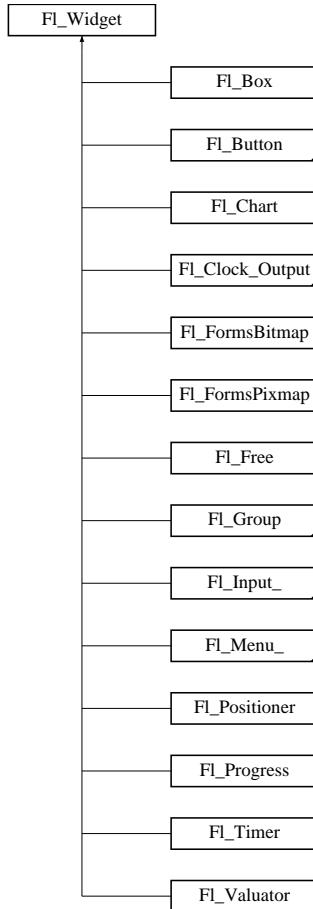

### Public Member Functions

- virtual [~Fl\\_Widget \(\)](#)  
*Destroys the widget.*
- virtual void [draw \(\)=0](#)  
*Draw the widget.*
- virtual int [handle \(int event\)](#)  
*Handles the specified event.*
- [Fl\\_Group \\* parent \(\) const](#)  
*Returns a pointer to the parent widget.*

- void **parent** (**Fl\_Group** \*p)  
*Internal use only.*
- **uchar type** () const  
*Gets the widget type.*
- void **type** (uchar t)  
*Sets the widget type.*
- int **x** () const  
*Gets the widget position in its window.*
- int **y** () const  
*Gets the widget position in its window.*
- int **w** () const  
*Gets the widget width.*
- int **h** () const  
*Gets the widget height.*
- virtual void **resize** (int x, int y, int w, int h)  
*Change the size or position of the widget.*
- int **damage\_resize** (int, int, int, int)  
*Internal use only.*
- void **position** (int X, int Y)  
*Reposition the window or widget.*
- void **size** (int W, int H)  
*Change the size of the widget.*
- **Fl\_Align align** () const  
*Gets the label alignment.*
- void **align** (**Fl\_Align** alignment)  
*Sets the label alignment.*
- **Fl\_Boxtype box** () const  
*Gets the box type for the widget.*
- void **box** (**Fl\_Boxtype** new\_box)  
*Sets the box type for the widget.*
- **Fl\_Color color** () const  
*Gets the background color of the widget.*
- void **color** (unsigned bg)  
*Sets the background color of the widget.*

- `Fl_Color selection_color () const`  
*Gets the selection color.*
- `void selection_color (unsigned a)`  
*Gets or sets the selection color.*
- `void color (unsigned bg, unsigned sel)`  
*Sets the background and selection color of the widget.*
- `const char * label () const`  
*Get the current label text.*
- `void label (const char *text)`  
*Get or set the current label pointer.*
- `void copy_label (Fl_CString new_label)`  
*Sets the current label.*
- `void label (Fl_Labeltype a, const char *b)`  
*Shortcut to set the label text and type in one call.*
- `Fl_Labeltype labeltype () const`  
*Gets the label type.*
- `void labeltype (Fl_Labeltype a)`  
*Sets the label type.*
- `Fl_Color labelcolor () const`  
*Gets the label color.*
- `void labelcolor (unsigned c)`  
*Sets the label color.*
- `Fl_Font labelfont () const`  
*Gets the font to use.*
- `void labelfont (Fl_Font f)`  
*Sets the font to use.*
- `Fl_Fontsize labelsize () const`  
*Gets the font size in pixels.*
- `void labelsize (Fl_Fontsize pix)`  
*Gets or sets the font size in pixels.*
- `Fl_Image * image ()`  
*Gets or sets the image to use as part of the widget label.*
- `void image (Fl_Image *img)`

*Gets or sets the image to use as part of the widget label.*

- void [image \(Fl\\_Image &img\)](#)

*Gets or sets the image to use as part of the widget label.*

- [Fl\\_Image \\* deimage \(\)](#)

*Gets the image to use as part of the widget label.*

- void [deimage \(Fl\\_Image \\*img\)](#)

*Sets the image to use as part of the widget label.*

- void [deimage \(Fl\\_Image &img\)](#)

*Sets the image to use as part of the widget label.*

- const char \* [tooltip \(\) const](#)

*Gets the current tooltip text.*

- void [tooltip \(const char \\*t\)](#)

*Sets the current tooltip text.*

- [Fl\\_Callback\\_p callback \(\) const](#)

*Gets the current callback function for the widget.*

- void [callback \(Fl\\_Callback \\*cb, void \\*p\)](#)

*Sets the current callback function for the widget.*

- void [callback \(Fl\\_Callback \\*cb\)](#)

*Sets the current callback function for the widget.*

- void [callback \(Fl\\_Callback0 \\*cb\)](#)

*Sets the current callback function for the widget.*

- void [callback \(Fl\\_Callback1 \\*cb, long p=0\)](#)

*Sets the current callback function for the widget.*

- void \* [user\\_data \(\) const](#)

*Gets the user data for this widget.*

- void [user\\_data \(void \\*v\)](#)

*Sets the user data for this widget.*

- long [argument \(\) const](#)

*Gets the current user data (long) argument that is passed to the callback function.*

- void [argument \(long v\)](#)

*Sets the current user data (long) argument that is passed to the callback function.*

- [Fl\\_When when \(\) const](#)

*Controls when callbacks are done.*

- void **when** (uchar i)  
*Flags used to decide when a callback is called.*
- int **visible** () const  
*Returns whether a widget is visible.*
- int **visible\_r** () const  
*Returns whether a widget and all its parents are visible.*
- void **show** ()  
*Makes a widget visible.*
- void **hide** ()  
*Makes a widget invisible.*
- void **set\_visible** ()  
*Makes the widget visible.*
- void **clear\_visible** ()  
*Hides the widget.*
- int **active** () const  
*Returns whether the widget is active.*
- int **active\_r** () const  
*active\_r() returns whether the widget and all of its parents are active.*
- void **activate** ()  
*Activate a widget.*
- void **deactivate** ()  
*Deactivate a widget.*
- int **output** () const  
*Return if a widget is used for output only.*
- void **set\_output** ()  
*Set a widget to output only.*
- void **clear\_output** ()  
*Set a widget to accept input.*
- int **takesevents** () const  
*Returns if the widget is able to take events.*
- int **changed** () const  
*Check if the widget value changed since the last callback.*
- void **set\_changed** ()  
*Mark the value of the widget as changed.*

- void **clear\_changed** ()  
*Mark the value of the widget as unchanged.*
- int **take\_focus** ()  
*Give the widget the keyboard focus.*
- void **set\_visible\_focus** ()  
*Enables keyboard focus navigation with this widget.*
- void **clear\_visible\_focus** ()  
*Disables keyboard focus navigation with this widget.*
- void **visible\_focus** (int v)  
*Modifies keyboard focus navigation.*
- int **visible\_focus** ()  
*Check whether this widget has a visible focus.*
- void **do\_callback** ()  
*Call the widget callback.*
- void **do\_callback** (Fl\_Widget \*o, void \*arg=0)  
*Call the widget callback.*
- void **do\_callback** (Fl\_Widget \*o, long arg)  
*Call the widget callback.*
- int **test\_shortcut** ()  
*Internal use only.*
- int **contains** (const Fl\_Widget \*w) const  
*Checks if w is a child of this widget.*
- int **inside** (const Fl\_Widget \*w) const  
*Check if this widget is a child of w.*
- void **redraw** ()  
*Schedule the drawing of the widget.*
- void **redraw\_label** ()  
*Schedule the drawing of the label.*
- uchar **damage** () const  
*Returns non-zero if **draw()** needs to be called.*
- void **clear\_damage** (uchar c=0)  
*Clear damage flags.*
- void **damage** (uchar c)

*Set the damage bits for the widget.*

- void **damage** (uchar c, int x, int y, int w, int h)

*Set the damage bits for an area inside the widget.*

- void **draw\_label** (int, int, int, int, **Fl\_Align**) const

*Anybody can call this to force the label to draw anywhere.*

- void **measure\_label** (int &ww, int &hh)

*Sets width ww, height hh accordingly with the labeltype size, label with images will return w() h() of the image.*

- **Fl\_Window** \* **window** () const

*Returns a pointer to the primary **Fl\_Window** widget.*

- **Fl\_Color** **color2** () const

*For back compatibility only.*

- void **color2** (unsigned a)

*For back compatibility only.*

## Static Public Member Functions

- static void **default\_callback** (**Fl\_Widget** \*cb, void \*d)

*Sets the default callback for all widgets.*

- static char **label\_shortcut** (const char \*t)

*Internal use only.*

- static int **test\_shortcut** (const char \*)

*Internal use only.*

## Protected Types

- enum {

**INACTIVE** = 1, **INVISIBLE** = 2, **OUTPUT** = 4, **SHORTCUT\_LABEL** = 64,

**CHANGED** = 128, **VISIBLE\_FOCUS** = 512, **COPIED\_LABEL** = 1024 }

*flags possible values enumeration.*

## Protected Member Functions

- **Fl\_Widget** (int x, int y, int w, int h, **Fl\_CString** label=0L)

*Creates a widget at the given position and size.*

- void **x** (int v)

*Internal use only.*

- void [y](#) (int v)

*Internal use only.*

- void [w](#) (int v)

*Internal use only.*

- void [h](#) (int v)

*Internal use only.*

- int [flags](#) () const

*Gets the widget flags mask.*

- void [set\\_flag](#) (int c)

*Sets a flag in the flags mask.*

- void [clear\\_flag](#) (int c)

*Clears a flag in the flags mask.*

- void [draw\\_box](#) () const

*Draws the widget box according its box style.*

- void [draw\\_box](#) ([Fl\\_Boxtype](#), [Fl\\_Color](#)) const

*Draws a box of type b, of color c at the widget position and size.*

- void [draw\\_box](#) ([Fl\\_Boxtype](#), int, int, int, int, [Fl\\_Color](#)) const

*Draws a box of type b, of color c at the widget position X,Y and size W,H.*

- void [draw\\_focus](#) ()

*draws a focus rectangle around the widget*

- void [draw\\_focus](#) ([Fl\\_Boxtype](#), int, int, int, int) const

*Draws a focus box for the widget at position X,Y and SIZE W,H .*

- void [draw\\_label](#) () const

*The normal call for a [draw\(\)](#) method.*

- void [draw\\_label](#) (int, int, int, int) const

*[draw\(\)](#) can use this instead to change the bounding box*

## Friends

- class [Fl\\_Group](#)

### 30.102.1 Detailed Description

[Fl\\_Widget](#) is the base class for all widgets in FLTK.

You can't create one of these because the constructor is not public. However you can subclass it.

All "property" accessing methods, such as [color\(\)](#), [parent\(\)](#), or [argument\(\)](#) are implemented as trivial inline functions and thus are as fast and small as accessing fields in a structure. Unless otherwise noted, the property setting methods such as [color\(n\)](#) or [label\(s\)](#) are also trivial inline functions, even if they change the widget's appearance. It is up to the user code to call [redraw\(\)](#) after these.

### 30.102.2 Member Enumeration Documentation

#### 30.102.2.1 anonymous enum [protected]

flags possible values enumeration.

See [activate\(\)](#), [output\(\)](#), [visible\(\)](#), [changed\(\)](#), [set\\_visible\\_focus\(\)](#)

**Enumerator:**

***INACTIVE*** the widget can't receive focus, and is disabled but potentially visible

***INVISIABLE*** the widget is not drawn but can receive events

***OUTPUT*** for output only

***SHORTCUT\_LABEL*** the label contains a shortcut we need to draw

***CHANGED*** the widget value changed

***VISIBLE\_FOCUS*** accepts keyboard focus navigation if the widget can have the focus

***COPIED\_LABEL*** the widget label is internally copied, its destruction is handled by the widget

### 30.102.3 Constructor & Destructor Documentation

#### 30.102.3.1 [Fl\\_Widget::Fl\\_Widget \(int x, int y, int w, int h, Fl\\_CString label = 0L\)](#) [protected]

Creates a widget at the given position and size.

The [Fl\\_Widget](#) is a protected constructor, but all derived widgets have a matching public constructor. It takes a value for [x\(\)](#), [y\(\)](#), [w\(\)](#), [h\(\)](#), and an optional value for [label\(\)](#).

**Parameters:**

← ***x,y*** the position of the widget relative to the enclosing window

← ***w,h*** size of the widget in pixels

← ***label*** optional text for the widget label

References [Fl\\_Group::add\(\)](#), [Fl\\_Label::color](#), [Fl\\_Group::current\(\)](#), [default\\_callback\(\)](#), [Fl\\_Label::deimage](#), [FL\\_ALIGN\\_CENTER](#), [FL\\_FOREGROUND\\_COLOR](#), [FL\\_HELVETICA](#), [FL\\_NO\\_BOX](#), [FL\\_NORMAL\\_LABEL](#), [FL\\_NORMAL\\_SIZE](#), [FL\\_WHEN\\_RELEASE](#), [Fl\\_Label::font](#), [Fl\\_Label::image](#), [Fl\\_Label::size](#), [Fl\\_Label::type](#), [Fl\\_Label::value](#), and [VISIBLE\\_FOCUS](#).

### 30.102.3.2 `Fl_Widget::~Fl_Widget () [virtual]`

Destroys the widget.

Destroys the widget, taking care of throwing focus before if any.

Destroying single widgets is not very common, and it is your responsibility to either remove() them from any enclosing group or destroy that group *immediately* after destroying the children. You almost always want to destroy the parent group instead which will destroy all of the child widgets and groups in that group.

Destruction does not remove from any parent group! And groups when destroyed destroy all their children. This is convenient and fast. However, it is only legal to destroy a "root" such as an `Fl_Window`, and automatic destructors may be called.

References `Fl::clear_widget_pointer()`, `COPIED_LABEL`, `flags()`, and `Fl_Label::value`.

## 30.102.4 Member Function Documentation

### 30.102.4.1 `void Fl_Widget::activate ()`

Activate a widget.

Changing this value will send `FL_ACTIVATE` to the widget if `active_r()` is true.

See also:

[active\(\)](#), [active\\_r\(\)](#), [deactivate\(\)](#)

References `active()`, `active_r()`, `clear_flag()`, `FL_ACTIVATE`, `Fl::focus()`, `handle()`, `INACTIVE`, `inside()`, `redraw()`, `redraw_label()`, and `take_focus()`.

Referenced by `Fl_File_Chooser::rescan()`, `Fl_File_Chooser::rescan_keep_filename()`, `Fl_Help_Dialog::textsize()`, `Fl_File_Chooser::type()`, and `Fl_File_Chooser::value()`.

### 30.102.4.2 `int Fl_Widget::active () const [inline]`

Returns whether the widget is active.

Return values:

`0` if the widget is inactive

See also:

[active\\_r\(\)](#), [activate\(\)](#), [deactivate\(\)](#)

References `INACTIVE`.

Referenced by `activate()`, `Fl_Tile::handle()`, `Fl_Repeat_Button::handle()`, and `Fl_Group::handle()`.

### 30.102.4.3 `int Fl_Widget::active_r () const`

`active_r()` returns whether the widget and all of its parents are active.

Return values:

`0` if this or any of the parent widgets are inactive

**See also:**

[active\(\)](#), [activate\(\)](#), [deactivate\(\)](#)

Referenced by `activate()`, `deactivate()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Scrollbar::draw()`, `Fl_Roller::draw()`, `Fl_Progress::draw()`, `Fl_Menu_Button::draw()`, `Fl_Light_Button::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl_Choice::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `draw_box()`, `draw_label()`, `Fl_Input_::drawtext()`, `Fl_Text_Editor::handle()`, `Fl_Text_Display::handle()`, `Fl_Input::handle()`, `Fl_File_Input::handle()`, and `Fl_Browser::item_draw()`.

**30.102.4.4 void Fl\_Widget::align (Fl\_Align *alignment*) [inline]**

Sets the label alignment.

This controls how the label is displayed next to or inside the widget. The default value is `FL_ALIGN_CENTER`, which centers the label inside the widget.

**Parameters:**

← *alignment* new label alignment

**See also:**

[align\(\)](#), [Fl\\_Align](#)

**30.102.4.5 Fl\_Align Fl\_Widget::align () const [inline]**

Gets the label alignment.

**Returns:**

label alignment

**See also:**

[label\(\)](#), [align\(Fl\\_Align\)](#), [Fl\\_Align](#)

**Todo**

This function should not take uchar as an argument. Apart from the fact that uchar is too short with only 8 bits, it does not provide type safety (in which case we don't need to declare `Fl_Type` an enum to begin with).

Referenced by `Fl_Browser_::bbox()`, `Fl_Scroll::draw()`, `Fl_Browser_::draw()`, `draw_label()`, `Fl_Group::draw_outside_label()`, `Fl_Browser_::Fl_Browser_()`, `Fl_Chart::Fl_Chart()`, `Fl_Choice::Fl_Choice()`, `Fl_Clock_Output::Fl_Clock_Output()`, `Fl_Counter::Fl_Counter()`, `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_FormsBitmap::Fl_FormsBitmap()`, `Fl_FormsPixmap::Fl_FormsPixmap()`, `Fl_Group::Fl_Group()`, `Fl_Input_::Fl_Input_()`, `Fl_Input_Choice::Fl_Input_Choice()`, `Fl_Light_Button::Fl_Light_Button()`, `Fl_Positioner::Fl_Positioner()`, `Fl_Progress::Fl_Progress()`, `Fl_Spinner::Fl_Spinner()`, `Fl_Timer::Fl_Timer()`, `Fl_Valuator::Fl_Valuator()`, `Fl_Value_Input::Fl_Value_Input()`, `Fl_Value_Output::Fl_Value_Output()`, `redraw_label()`, `Fl::reload_scheme()`, `Fl_File_Chooser::rescan_keep_filename()`, `Fl_Scroll::resize()`, `Fl_Browser_::resize()`, `Fl_Browser_::scrollbar_left()`, and `Fl_Browser_::scrollbar_right()`.

**30.102.4.6 void Fl\_Widget::argument (long v) [inline]**

Sets the current user data (long) argument that is passed to the callback function.

**Todo**

The user data value must be implemented using a *union* to avoid 64 bit machine incompatibilities.

**30.102.4.7 void Fl\_Widget::box (Fl\_Boxtype new\_box) [inline]**

Sets the box type for the widget.

This identifies a routine that draws the background of the widget. See `Fl_Boxtype` for the available types. The default depends on the widget, but is usually `FL_NO_BOX` or `FL_UP_BOX`.

**Parameters:**

$\leftarrow$  `new_box` the new box type

**See also:**

[box\(\)](#), [Fl\\_Boxtype](#)

**30.102.4.8 Fl\_Boxtype Fl\_Widget::box () const [inline]**

Gets the box type for the widget.

**Returns:**

the current box type

**See also:**

[box\(Fl\\_Boxtype\)](#), [Fl\\_Boxtype](#)

Referenced by `Fl_Browser_::bbox()`, `Fl_Timer::draw()`, `Fl_FormsPixmap::draw()`, `Fl_FormsBitmap::draw()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Value_Input::draw()`, `Fl_Text_Display::draw()`, `Fl_Tabs::draw()`, `Fl_Slider::draw()`, `Fl_Scrollbar::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Return_Button::draw()`, `Fl_Progress::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Button::draw()`, `Fl_Menu_Bar::draw()`, `Fl_Menu_Item::draw()`, `Fl_Light_Button::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Button::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `Fl_Group::draw_children()`, `draw_focus()`, `draw_label()`, `Fl_Input_::drawtext()`, `Fl_Adjuster::Fl_Adjuster()`, `Fl_Box::Fl_Box()`, `Fl_Browser_::Fl_Browser_()`, `Fl_Button::Fl_Button()`, `Fl_Chart::Fl_Chart()`, `Fl_Check_Button::Fl_Check_Button()`, `Fl_Choice::Fl_Choice()`, `Fl_Clock::Fl_Clock()`, `Fl_Clock_Output::Fl_Clock_Output()`, `Fl_Color_Chooser::Fl_Color_Chooser()`, `Fl_Counter::Fl_Counter()`, `Fl_Dial::Fl_Dial()`, `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_FormsBitmap::Fl_FormsBitmap()`, `Fl_FormsPixmap::Fl_FormsPixmap()`, `Fl_Help_Dialog::Fl_Help_Dialog()`, `Fl_Input_::Fl_Input_()`, `Fl_Input_Choice::Fl_Input_Choice()`, `Fl_Menu_::Fl_Menu_()`, `Fl_Positioner::Fl_Positioner()`, `Fl_Progress::Fl_Progress()`, `Fl_Roller::Fl_Roller()`, `Fl_Round_Button::Fl_Round_Button()`, `Fl_Round_Clock::Fl_Round_Clock()`, `Fl_Scrollbar::Fl_Scrollbar()`, `Fl_Slider::Fl_Slider()`, `Fl_Tabs::Fl_Tabs()`, `Fl_Text_Display::Fl_Text_Display()`, `Fl_Timer::Fl_Timer()`, `Fl_Value_Input::Fl_Value_Input()`, `Fl_Value_Output::Fl_Value_Output()`, `Fl_Wizard::Fl_Wizard()`, `Fl_Value_Slider::handle()`, `Fl_Slider::handle()`, `Fl_Menu_Button::handle()`, `Fl_Light_Button::handle()`, `Fl_Input::handle()`, `Fl_Button::handle()`, `Fl_Menu_Button::popup()`, `redraw_label()`, `Fl_Text_Display::resize()`, `Fl_Help_View::resize()`, and `Fl_Button::value()`.

**30.102.4.9 void Fl\_Widget::callback (Fl\_Callback1 \* cb, long p = 0) [inline]**

Sets the current callback function for the widget.

Each widget has a single callback.

**Parameters:**

← *cb* new callback

← *p* user data

**30.102.4.10 void Fl\_Widget::callback (Fl\_Callback0 \* cb) [inline]**

Sets the current callback function for the widget.

Each widget has a single callback.

**Parameters:**

← *cb* new callback

**30.102.4.11 void Fl\_Widget::callback (Fl\_Callback \* cb) [inline]**

Sets the current callback function for the widget.

Each widget has a single callback.

**Parameters:**

← *cb* new callback

**30.102.4.12 void Fl\_Widget::callback (Fl\_Callback \* cb, void \* p) [inline]**

Sets the current callback function for the widget.

Each widget has a single callback.

**Parameters:**

← *cb* new callback

← *p* user data

**30.102.4.13 Fl\_Callback\_p Fl\_Widget::callback () const [inline]**

Gets the current callback function for the widget.

Each widget has a single callback.

**Returns:**

current callback

Referenced by Fl\_Browser::Fl\_Browser(), Fl\_Color\_Chooser::fl\_color\_chooser(), Fl\_Color\_Chooser::Fl\_Color\_Chooser(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Help\_Dialog::Fl\_Help\_Dialog(), Fl\_Help\_View::Fl\_Help\_View(), Fl\_Input\_Choice::Fl\_Input\_Choice(), Fl\_Scroll::Fl\_Scroll(), Fl\_Spinner::Fl\_Spinner(), and Fl\_Value\_Input::Fl\_Value\_Input().

**30.102.4.14 int Fl\_Widget::changed () const [inline]**

Check if the widget value changed since the last callback.

"Changed" is a flag that is turned on when the user changes the value stored in the widget. This is only used by subclasses of [Fl\\_Widget](#) that store values, but is in the base class so it is easier to scan all the widgets in a panel and [do\\_callback\(\)](#) on the changed ones in response to an "OK" button.

Most widgets turn this flag off when they do the callback, and when the program sets the stored value.

**Return values:**

*0* if the value did not change

**See also:**

[set\\_changed\(\)](#), [clear\\_changed\(\)](#)\*

Reimplemented in [Fl\\_Input\\_Choice](#).

References CHANGED.

Referenced by [Fl\\_Input\\_Choice::changed\(\)](#), [Fl\\_Text\\_Editor::maybe\\_do\\_callback\(\)](#), and [Fl\\_Menu\\_::picked\(\)](#).

**30.102.4.15 void Fl\_Widget::clear\_changed () [inline]**

Mark the value of the widget as unchanged.

**See also:**

[changed\(\)](#), [set\\_changed\(\)](#)

Reimplemented in [Fl\\_Input\\_Choice](#).

References CHANGED.

Referenced by [Fl\\_Input\\_Choice::clear\\_changed\(\)](#), [do\\_callback\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Valuator::handle\\_release\(\)](#), [Fl\\_Input\\_::static\\_value\(\)](#), [Fl\\_Valuator::value\(\)](#), [Fl\\_Positioner::value\(\)](#), [Fl\\_Menu\\_::value\(\)](#), and [Fl\\_Button::value\(\)](#).

**30.102.4.16 void Fl\_Widget::clear\_damage (uchar c = 0) [inline]**

Clear damage flags.

Damage flags are cleared when parts of the widget drawing is repaired.

**Parameters:**

$\leftarrow c$  bitmask of flags to clear

**See also:**

[damage\(uchar\)](#), [damage\(\)](#)

Referenced by [Fl\\_Value\\_Input::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Group::draw\\_child\(\)](#), [Fl\\_Overlay\\_Window::flush\(\)](#), [Fl\\_Gl\\_Window::flush\(\)](#), [Fl\\_Double\\_Window::flush\(\)](#), [Fl::flush\(\)](#), [Fl\\_Overlay\\_Window::redraw\\_overlay\(\)](#), and [Fl\\_Group::update\\_child\(\)](#).

**30.102.4.17 void Fl\_Widget::clear\_output () [inline]**

Set a widget to accept input.

**See also:**

[set\\_output\(\)](#), [output\(\)](#)

References OUTPUT.

**30.102.4.18 void Fl\_Widget::clear\_visible () [inline]**

Hides the widget.

You must still redraw the parent to see a change in the window. Normally you want to use the [hide\(\)](#) method instead.

References INVISIBLE.

Referenced by [Fl\\_Scroll::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Timer::Fl\\_Timer\(\)](#), [Fl\\_Window::Fl\\_Window\(\)](#), and [Fl\\_Window::hide\(\)](#).

**30.102.4.19 void Fl\_Widget::clear\_visible\_focus () [inline]**

Disables keyboard focus navigation with this widget.

Normally, all widgets participate in keyboard focus navigation.

**See also:**

[set\\_visible\\_focus\(\)](#), [visible\\_focus\(\)](#), [visible\\_focus\(int\)](#)

References VISIBLE\_FOCUS.

Referenced by [visible\\_focus\(\)](#).

**30.102.4.20 void Fl\_Widget::color (unsigned *bg*, unsigned *sel*) [inline]**

Sets the background and selection color of the widget.

The two color form sets both the background and selection colors.

**Parameters:**

← *bg* background color

← *sel* selection color

**See also:**

[color\(unsigned\)](#), [selection\\_color\(unsigned\)](#)

**30.102.4.21 void Fl\_Widget::color (unsigned *bg*) [inline]**

Sets the background color of the widget.

The color is passed to the box routine. The color is either an index into an internal table of RGB colors or an RGB color value generated using `fl_rgb_color()`. The default for most widgets is `FL_BACKGROUND_COLOR`. Use [Fl::set\\_color\(\)](#) to redefine colors in the color map.

**Parameters:**

← *bg* background color

**See also:**

[color\(\)](#), [color\(unsigned, unsigned\)](#), [selection\\_color\(unsigned\)](#)

**30.102.4.22 Fl\_Color Fl\_Widget::color () const [inline]**

Gets the background color of the widget.

**Returns:**

current background color

**See also:**

[color\(unsigned\)](#), [color\(unsigned, unsigned\)](#)

Referenced by `Fl_Text_Display::clear_rect()`, `Fl_File_Chooser::color()`, `Fl_Timer::draw()`, `Fl_FormsPixmap::draw()`, `Fl_FormsBitmap::draw()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Value_Input::draw()`, `Fl_Text_Display::draw()`, `Fl_Tabs::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Return_Button::draw()`, `Fl_Progress::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Button::draw()`, `Fl_Menu_Item::draw()`, `Fl_Light_Button::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl.Choice::draw()`, `Fl_Button::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `draw_focus()`, `Fl_Text_Display::draw_string()`, `Fl_Input_::drawtext()`, `Fl_Browser_::Fl_Browser_()`, `Fl_FormsBitmap::Fl_FormsBitmap()`, `Fl_FormsPixmap::Fl_FormsPixmap()`, `Fl_Help_Dialog::Fl_Help_Dialog()`, `Fl_Help_View::Fl_Help_View()`, `Fl_Input_::Fl_Input_()`, `Fl_Progress::Fl_Progress()`, `Fl_Scrollbar::Fl_Scrollbar()`, `Fl_Text_Display::Fl_Text_Display()`, `Fl_Value_Input::Fl_Value_Input()`, and `Fl.Choice::handle()`.

**30.102.4.23 void Fl\_Widget::color2 (unsigned *a*) [inline]**

For back compatibility only.

**30.102.4.24 Fl\_Color Fl\_Widget::color2 () const [inline]**

For back compatibility only.

Referenced by `Fl_Progress::draw()`.

**30.102.4.25 int Fl\_Widget::contains (const Fl\_Widget \* *w*) const**

Checks if *w* is a child of this widget.

**Parameters:**

← *w* potential child widget

**Returns:**

Returns 1 if *w* is a child of this widget, or is equal to this widget. Returns 0 if *w* is NULL.

References parent\_.

Referenced by Fl::belowmouse(), Fl\_Group::handle(), inside(), and take\_focus().

**30.102.4.26 void Fl\_Widget::copy\_label (Fl\_CString *new\_label*)**

Sets the current label.

Unlike [label\(\)](#), this method allocates a copy of the label string instead of using the original string pointer.

**Parameters:**

← *new\_label* the new label text

**See also:**

[label\(\)](#)

Reimplemented in [Fl\\_Window](#).

References clear\_flag(), COPIED\_LABEL, flags(), redraw\_label(), set\_flag(), and Fl\_Label::value.

**30.102.4.27 void Fl\_Widget::damage (uchar *c*, int *x*, int *y*, int *w*, int *h*)**

Set the damage bits for an area inside the widget.

Setting damage bits will schedule the widget for the next redraw.

**Parameters:**

← *c* bitmask of flags to set

← *x,y,w,h* size of damaged area

**See also:**

[damage\(\)](#), [clear\\_damage\(uchar\)](#)

References damage(), damage\_, FL\_WINDOW, h(), parent(), type(), and w().

**30.102.4.28 void Fl\_Widget::damage (uchar *c*)**

Set the damage bits for the widget.

Setting damage bits will schedule the widget for the next redraw.

**Parameters:**

← *c* bitmask of flags to set

**See also:**

[damage\(\)](#), [clear\\_damage\(uchar\)](#)

References damage(), FL\_WINDOW, h(), type(), w(), x(), and y().

### 30.102.4.29 uchar Fl\_Widget::damage () const [inline]

Returns non-zero if [draw\(\)](#) needs to be called.

The damage value is actually a bit field that the widget subclass can use to figure out what parts to draw.

#### Returns:

a bitmap of flags describing the kind of damage to the widget

#### See also:

[damage\(uchar\)](#), [clear\\_damage\(uchar\)](#)

Referenced by [Fl\\_Slider::bounds\(\)](#), [Fl\\_Text\\_Display::buffer\\_modified\\_cb\(\)](#), [damage\(\)](#), [Fl\\_Value\\_Slider::draw\(\)](#), [Fl\\_Value\\_Output::draw\(\)](#), [Fl\\_Value\\_Input::draw\(\)](#), [Fl\\_Text\\_Display::draw\(\)](#), [Fl\\_Tabs::draw\(\)](#), [Fl\\_Slider::draw\(\)](#), [Fl\\_Scrollbar::draw\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Roller::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Input::draw\(\)](#), [Fl\\_Group::draw\(\)](#), [Fl\\_File\\_Input::draw\(\)](#), [Fl\\_Dial::draw\(\)](#), [Fl\\_Counter::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Group::draw\\_children\(\)](#), [Fl\\_Input\\_::drawtext\(\)](#), [Fl\\_Overlay\\_Window::flush\(\)](#), [Fl\\_Gl\\_Window::flush\(\)](#), [Fl\\_Double\\_Window::flush\(\)](#), [Fl::flush\(\)](#), [Fl\\_Scrollbar::handle\(\)](#), [Fl\\_File\\_Input::handle\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Text\\_Display::highlight\\_data\(\)](#), [Fl\\_Input\\_::position\(\)](#), [Fl\\_Text\\_Display::redisplay\\_range\(\)](#), [redraw\(\)](#), [redraw\\_label\(\)](#), [Fl\\_Browser\\_::redraw\\_line\(\)](#), [Fl\\_Overlay\\_Window::redraw\\_overlay\(\)](#), [Fl\\_Gl\\_Window::redraw\\_overlay\(\)](#), [Fl\\_Scroll::scroll\\_to\(\)](#), [Fl\\_Slider::slider\\_size\(\)](#), [Fl\\_Group::update\\_child\(\)](#), [Fl\\_File\\_Input::value\(\)](#), [Fl\\_Clock\\_Output::value\(\)](#), and [Fl\\_Valuator::value\\_damage\(\)](#).

### 30.102.4.30 int Fl\_Widget::damage\_resize (int X, int Y, int W, int H)

Internal use only.

References [h\(\)](#), [redraw\(\)](#), [resize\(\)](#), [w\(\)](#), [x\(\)](#), and [y\(\)](#).

Referenced by [Fl\\_Browser\\_::draw\(\)](#), and [Fl\\_Tile::position\(\)](#).

### 30.102.4.31 void Fl\_Widget::deactivate ()

Deactivate a widget.

Inactive widgets will be drawn "grayed out", e.g. with less contrast than the active widget. Inactive widgets will not receive any keyboard or mouse button events. Other events (including FL\_ENTER, FL\_MOVE, FL\_LEAVE, FL\_SHORTCUT, and others) will still be sent. A widget is only active if [active\(\)](#) is true on it and all of its parents.

Changing this value will send FL\_DEACTIVATE to the widget if [active\\_r\(\)](#) is true.

Currently you cannot deactivate [Fl\\_Window](#) widgets.

#### See also:

[activate\(\)](#), [active\(\)](#), [active\\_r\(\)](#)

Reimplemented in [Fl\\_Repeat\\_Button](#).

References [active\\_r\(\)](#), [FL\\_DEACTIVATE](#), [handle\(\)](#), [INACTIVE](#), [redraw\(\)](#), [redraw\\_label\(\)](#), and [set\\_flag\(\)](#).

Referenced by [Fl\\_Repeat\\_Button::deactivate\(\)](#), [Fl\\_Help\\_Dialog::Fl\\_Help\\_Dialog\(\)](#), [Fl\\_File\\_Chooser::rescan\(\)](#), [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#), [Fl\\_Help\\_Dialog::textsize\(\)](#), [Fl\\_File\\_Chooser::type\(\)](#), and [Fl\\_File\\_Chooser::value\(\)](#).

**30.102.4.32 void Fl\_Widget::default\_callback (Fl\_Widget \* *cb*, void \* *d*) [static]**

Sets the default callback for all widgets.

Sets the default callback, which puts a pointer to the widget on the queue returned by [Fl::readqueue\(\)](#). You may want to call this from your own callback.

**Parameters:**

- ← *cb* the new callback
- ← *d* user data associated with that callback

**See also:**

[callback\(\)](#), [do\\_callback\(\)](#), [Fl::readqueue\(\)](#)

References [parent\(\)](#).

Referenced by [Fl::default\\_atclose\(\)](#), [do\\_callback\(\)](#), and [Fl\\_Widget\(\)](#).

**30.102.4.33 void Fl\_Widget::deimage (Fl\_Image & *img*) [inline]**

Sets the image to use as part of the widget label.

This image is used when drawing the widget in the inactive state.

**Parameters:**

- ← *img* the new image for the deactivated widget

**30.102.4.34 void Fl\_Widget::deimage (Fl\_Image \* *img*) [inline]**

Sets the image to use as part of the widget label.

This image is used when drawing the widget in the inactive state.

**Parameters:**

- ← *img* the new image for the deactivated widget

**30.102.4.35 Fl\_Image\* Fl\_Widget::deimage () [inline]**

Gets the image to use as part of the widget label.

This image is used when drawing the widget in the inactive state.

**Returns:**

the current deactivated image for this widget

**30.102.4.36 void Fl\_Widget::do\_callback (Fl\_Widget \* *o*, long *arg*) [inline]**

Call the widget callback.

Causes a widget to invoke its callback function, optionally with arbitrary arguments.

**Parameters:**

- ← *o* call the callback with *o* as the widget argument
- ← *arg* call the callback with *arg* as the user data argument

**See also:**

[callback\(\)](#)

References clear\_changed(), and default\_callback().

**30.102.4.37 void Fl\_Widget::do\_callback (Fl\_Widget \* *o*, void \* *arg* = 0) [inline]**

Call the widget callback.

Causes a widget to invoke its callback function, optionally with arbitrary arguments.

**Parameters:**

- ← *o* call the callback with *o* as the widget argument
- ← *arg* call the callback with *arg* as the user data argument

**See also:**

[callback\(\)](#)

References clear\_changed(), and default\_callback().

**30.102.4.38 void Fl\_Widget::do\_callback () [inline]**

Call the widget callback.

Causes a widget to invoke its callback function, optionally with arbitrary arguments.

**See also:**

[callback\(\)](#)

References clear\_changed(), and default\_callback().

Referenced by Fl\_Free::handle(), Fl\_Tile::handle(), Fl\_Text\_Editor::handle(), Fl\_Tabs::handle(), Fl\_Spinner::handle(), Fl\_Scrollbar::handle(), Fl\_Return\_Button::handle(), Fl\_Repeat\_Button::handle(), Fl\_Input::handle(), Fl\_Button::handle(), Fl\_Browser\_::handle(), Fl::handle(), Fl\_Valuator::handle\_drag(), Fl\_Text\_Editor::handle\_key(), Fl\_Valuator::handle\_release(), Fl\_Text\_Editor::kf\_backspace(), Fl\_Text\_Editor::kf\_cut(), Fl\_Text\_Editor::kf\_default(), Fl\_Text\_Editor::kf\_delete(), Fl\_Text\_Editor::kf\_enter(), Fl\_Text\_Editor::kf\_paste(), Fl\_Text\_Editor::kf\_undo(), Fl\_Text\_Editor::maybe\_do\_callback(), Fl\_Menu\_::picked(), Fl\_Input\_::replace(), Fl\_Browser\_::select(), Fl\_Help\_View::topline(), and Fl\_Input\_::undo().

**30.102.4.39 virtual void Fl\_Widget::draw () [pure virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implemented in [Fl\\_Adjuster](#), [Fl\\_Box](#), [Fl\\_Browser](#), [Fl\\_Button](#), [Fl\\_Cairo\\_Window](#), [Fl\\_Chart](#), [Fl\\_Choice](#), [Fl\\_Clock\\_Output](#), [Fl\\_Counter](#), [Fl\\_Dial](#), [Fl\\_File\\_Input](#), [Fl\\_FormsBitmap](#), [Fl\\_FormsPixmap](#), [Fl\\_Free](#), [Fl\\_Gl\\_Window](#), [Fl\\_Group](#), [Fl\\_Input](#), [Fl\\_Light\\_Button](#), [Fl\\_Menu\\_Bar](#), [Fl\\_Menu\\_Button](#), [Fl\\_Pack](#), [Fl\\_Positioner](#), [Fl\\_Progress](#), [Fl\\_Return\\_Button](#), [Fl\\_Roller](#), [Fl\\_Scroll](#), [Fl\\_Scrollbar](#), [Fl\\_Slider](#), [Fl\\_Tabs](#), [Fl\\_Text\\_Display](#), [Fl\\_Timer](#), [Fl\\_Value\\_Input](#), [Fl\\_Value\\_Output](#), [Fl\\_Value\\_Slider](#), [Fl\\_Window](#), and [Fl\\_Glut\\_Window](#).

Referenced by [Fl\\_Group::draw\\_child\(\)](#), and [Fl\\_Group::update\\_child\(\)](#).

#### **30.102.4.40 void Fl\_Widget::draw\_box (Fl\_Boxtype b, int X, int Y, int W, int H, Fl\_Color c) const [protected]**

Draws a box of type b, of color c at the widget position X,Y and size W,H.

References [active\\_r\(\)](#).

#### **30.102.4.41 void Fl\_Widget::draw\_box (Fl\_Boxtype b, Fl\_Color c) const [protected]**

Draws a box of type b, of color c at the widget position and size.

References [draw\\_box\(\)](#).

#### **30.102.4.42 void Fl\_Widget::draw\_focus (Fl\_Boxtype B, int X, int Y, int W, int H) const [protected]**

Draws a focus box for the widget at position X,Y and SIZE W,H .

References [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [color\(\)](#), [fl\\_color\(\)](#), [FL\\_DOWN\\_BOX](#), [FL\\_DOWN\\_FRAME](#), [fl\\_point\(\)](#), [fl\\_rect\(\)](#), [FL\\_THIN\\_DOWN\\_BOX](#), [FL\\_THIN\\_DOWN\\_FRAME](#), and [Fl::visible\\_focus\(\)](#).

#### **30.102.4.43 int Fl\_Widget::h () const [inline]**

Gets the widget height.

##### **Returns:**

the height of the widget in pixels.

Referenced by [Fl\\_Browser::bbox\(\)](#), [Fl\\_Text\\_Display::buffer\(\)](#), [damage\(\)](#), [damage\\_resize\(\)](#), [Fl\\_Glut\\_Window::draw\(\)](#), [Fl\\_Timer::draw\(\)](#), [Fl\\_FormsPixmap::draw\(\)](#), [Fl\\_FormsBitmap::draw\(\)](#), [Fl\\_Window::draw\(\)](#), [Fl\\_Value\\_Slider::draw\(\)](#), [Fl\\_Value\\_Output::draw\(\)](#), [Fl\\_Text\\_Display::draw\(\)](#), [Fl\\_Tabs::draw\(\)](#), [Fl\\_Slider::draw\(\)](#), [Fl\\_Scrollbar::draw\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Roller::draw\(\)](#), [Fl\\_Return\\_Button::draw\(\)](#), [Fl\\_Progress::draw\(\)](#), [Fl\\_Positioner::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Menu\\_Button::draw\(\)](#), [Fl\\_Menu\\_Bar::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), [Fl\\_Input::draw\(\)](#), [Fl\\_File\\_Input::draw\(\)](#), [Fl\\_Dial::draw\(\)](#), [Fl\\_Counter::draw\(\)](#), [Fl\\_Clock\\_Output::draw\(\)](#), [Fl\\_Choice::draw\(\)](#), [Fl\\_Chart::draw\(\)](#), [Fl\\_Browser::draw\(\)](#), [Fl\\_Adjuster::draw\(\)](#), [Fl\\_Group::draw\\_children\(\)](#), [draw\\_focus\(\)](#), [Fl\\_Group::draw\\_outside\\_label\(\)](#), [Fl\\_Glut\\_Window::draw\\_overlay\(\)](#), [Fl\\_Gl\\_Window::flush\(\)](#), [Fl\\_Double\\_Window::flush\(\)](#), [Fl\\_Group::forms\\_end\(\)](#), [Fl\\_Window::fullscreen\(\)](#), [Fl\\_Value\\_Slider::handle\(\)](#), [Fl\\_Tabs::handle\(\)](#), [Fl\\_Slider::handle\(\)](#), [Fl\\_Scrollbar::handle\(\)](#), [Fl\\_Positioner::handle\(\)](#), [Fl\\_Menu\\_Bar::handle\(\)](#), [Fl\\_Input::handle\(\)](#), [Fl\\_Dial::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Adjuster::handle\(\)](#), [Fl\\_Window::hotspot\(\)](#), [Fl\\_Gl\\_Window::make\\_current\(\)](#), [Fl\\_Gl\\_Window::ortho\(\)](#), [Fl\\_Menu\\_Button::popup\(\)](#),

`redraw_label()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `Fl_Overlay_Window::resize()`, `Fl_Input_::resize()`, `Fl_Help_View::resize()`, `Fl_Group::resize()`, `Fl_Gl_Window::resize()`, `Fl_Double_Window::resize()`, `Fl_Text_Display::scroll()`, `Fl_Window::show()`, `Fl_Text_Display::show_insert_position()`, `Fl_Group::sizes()`, `Fl_Help_View::topline()`, and `Fl_Text_Display::wrap_mode()`.

#### 30.102.4.44 void Fl\_Widget::h (int v) [inline, protected]

Internal use only.

Use `position(int,int)`, `size(int, int)` or `resize(int,int,int,int)` instead.

Referenced by `Fl_File_Chooser::add_extra()`, `Fl_Text_Display::buffer_modified_cb()`, `Fl::cairo_make_current()`, `damage()`, `Fl_Scroll::draw()`, `Fl_Pack::draw()`, `Fl_Group::draw_child()`, `Fl_Group::draw_outside_label()`, `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_Group::forms_end()`, `Fl_Help_Dialog::h()`, `Fl_Tile::handle()`, `Fl_Window::hotspot()`, `Fl_Gl_Window::make_current()`, `Fl_Tile::position()`, `Fl_File_Chooser::preview()`, `Fl_File_Chooser::rescan_keep_filename()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `Fl_Group::resize()`, `Fl_Group::sizes()`, and `Fl_Group::update_child()`.

#### 30.102.4.45 int Fl\_Widget::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

##### Parameters:

← *event* the kind of event received

##### Return values:

**0** if the event was not used or understood  
**1** if the event was used and can be deleted

##### See also:

[Fl\\_Event](#)

Reimplemented in `Fl_Adjuster`, `Fl_Box`, `Fl_Browser_`, `Fl_Button`, `Fl_Check_Browser`, `Fl_Choice`, `Fl_Clock`, `Fl_Counter`, `Fl_Dial`, `Fl_File_Input`, `Fl_Free`, `Fl_Group`, `Fl_Input`, `Fl_Light_Button`, `Fl_Menu_Bar`, `Fl_Menu_Button`, `Fl_Positioner`, `Fl_Repeat_Button`, `Fl_Return_Button`, `Fl_Roller`, `Fl_Scroll`, `Fl_Scrollbar`, `Fl_Slider`, `Fl_Spinner`, `Fl_Tabs`, `Fl_Text_Display`, `Fl_Text_Editor`, `Fl_Tile`, `Fl_Timer`, `Fl_Value_Input`, `Fl_Value_Output`, `Fl_Value_Slider`, `Fl_Window`, and `Fl_Glut_Window`.

Referenced by `activate()`, `Fl::belowmouse()`, `deactivate()`, `Fl::dnd()`, `Fl::focus()`, `Fl_Group::handle()`, `hide()`, `show()`, and `take_focus()`.

#### 30.102.4.46 void Fl\_Widget::hide ()

Makes a widget invisible.

**See also:**

[show\(\)](#), [visible\(\)](#), [visible\\_r\(\)](#)

Reimplemented in [Fl\\_Browser](#), [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Menu\\_Window](#), [Fl\\_Overlay\\_Window](#), and [Fl\\_Window](#).

References [FL\\_HIDE](#), [handle\(\)](#), [INVISIBLE](#), [parent\(\)](#), [set\\_flag\(\)](#), and [visible\\_r\(\)](#).

Referenced by [Fl::handle\(\)](#), [Fl\\_Browser::hide\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), [Fl\\_Wizard::value\(\)](#), and [Fl\\_Tabs::value\(\)](#).

**30.102.4.47 void Fl\_Widget::image (Fl\_Image & *img*) [inline]**

Gets or sets the image to use as part of the widget label.

This image is used when drawing the widget in the active state.

**Parameters:**

← *img* the new image for the label

**30.102.4.48 void Fl\_Widget::image (Fl\_Image \* *img*) [inline]**

Gets or sets the image to use as part of the widget label.

This image is used when drawing the widget in the active state.

**Parameters:**

← *img* the new image for the label

**30.102.4.49 Fl\_Image\* Fl\_Widget::image () [inline]**

Gets or sets the image to use as part of the widget label.

This image is used when drawing the widget in the active state.

**Returns:**

the current image

Referenced by [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), [Fl\\_Menu\\_Window::Fl\\_Menu\\_Window\(\)](#), [Fl\\_Overlay\\_Window::Fl\\_Overlay\\_Window\(\)](#), [Fl\\_Pixmap::label\(\)](#), [Fl\\_RGB\\_Image::label\(\)](#), [Fl\\_Image::label\(\)](#), [Fl\\_Bitmap::label\(\)](#), [Fl::reload\\_scheme\(\)](#), and [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#).

**30.102.4.50 int Fl\_Widget::inside (const Fl\_Widget \* *w*) const [inline]**

Check if this widget is a child of *w*.

Returns 1 if this widget is a child of *w*, or is equal to *w*. Returns 0 if *w* is NULL.

**Parameters:**

← *w* the possible parent widget.

**See also:**[contains\(\)](#)

References contains().

Referenced by activate(), and show().

**30.102.4.51 void Fl\_Widget::label (Fl\_Labeltype *a*, const char \* *b*) [inline]**

Shortcut to set the label text and type in one call.

**See also:**[label\(Fl\\_CString\)](#), [labeltype\(Fl\\_Labeltype\)](#)**30.102.4.52 void Fl\_Widget::label (const char \* *text*)**

Get or set the current label pointer.

The label is shown somewhere on or next to the widget. The passed pointer is stored unchanged in the widget (the string is *not* copied), so if you need to set the label to a formatted value, make sure the buffer is static, global, or allocated. The [copy\\_label\(\)](#) method can be used to make a copy of the label string automatically.

**Parameters:**

← *text* pointer to new label text

**See also:**[copy\\_label\(\)](#)

Reimplemented in [Fl\\_Window](#).

References clear\_flag(), COPIED\_LABEL, flags(), redraw\_label(), and [Fl\\_Label::value](#).

**30.102.4.53 const char\* Fl\_Widget::label () const [inline]**

Get the current label text.

**Returns:**

a pointer to the current label text

**See also:**[label\(Fl\\_CString\)](#), [copy\\_label\(Fl\\_CString\)](#)

Reimplemented in [Fl\\_Window](#).

Referenced by [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), [Fl\\_Tabs::handle\(\)](#), [Fl\\_Window::label\(\)](#), [Fl\\_File\\_Icon::label\(\)](#), [Fl\\_File\\_Chooser::ok\\_label\(\)](#), [Fl\\_Menu\\_Button::popup\(\)](#), [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#), and [test\\_shortcut\(\)](#).

**30.102.4.54 char Fl\_Widget::label\_shortcut (const char \**t*) [static]**

Internal use only.

Referenced by test\_shortcut().

**30.102.4.55 void Fl\_Widget::labelcolor (unsigned *c*) [inline]**

Sets the label color.

The default color is FL\_FOREGROUND\_COLOR.

**Parameters:**

← *c* the new label color

**30.102.4.56 Fl\_Color Fl\_Widget::labelcolor () const [inline]**

Gets the label color.

The default color is FL\_FOREGROUND\_COLOR.

**Returns:**

the current label color

Referenced by Fl\_Timer::draw(), Fl\_Scrollbar::draw(), Fl\_Progress::draw(), Fl\_Counter::draw(), Fl\_Choice::draw(), Fl\_Button::draw(), and Fl\_Help\_Dialog::Fl\_Help\_Dialog().

**30.102.4.57 void Fl\_Widget::labelfont (Fl\_Font *f*) [inline]**

Sets the font to use.

Fonts are identified by indexes into a table. The default value uses a Helvetica typeface (Arial for Microsoft®Windows®). The function [Fl::set\\_font\(\)](#) can define new typefaces.

**Parameters:**

← *f* the new font for the label

**See also:**

[Fl\\_Font](#)

**30.102.4.58 Fl\_Font Fl\_Widget::labelfont () const [inline]**

Gets the font to use.

Fonts are identified by indexes into a table. The default value uses a Helvetica typeface (Arial for Microsoft®Windows®). The function [Fl::set\\_font\(\)](#) can define new typefaces.

**Returns:**

current font used by the label

See also:

[Fl\\_Font](#)

Referenced by Fl\_Timer::draw(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Help\_Dialog::Fl\_Help\_Dialog(), and Fl\_File\_Chooser::rescan\_keep\_filename().

#### **30.102.4.59 void Fl\_Widget::labelsize (Fl\_Fontsize *pix*) [inline]**

Gets or sets the font size in pixels.

The default size is 14 pixels.

**Parameters:**

← *pix* the new font size

#### **30.102.4.60 Fl\_Fontsize Fl\_Widget::labelsize () const [inline]**

Gets the font size in pixels.

The default size is 14 pixels.

**Returns:**

the current font size

Referenced by Fl\_Timer::draw(), Fl\_Menu\_Button::draw(), Fl\_Light\_Button::draw(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Help\_Dialog::Fl\_Help\_Dialog(), and Fl\_File\_Chooser::rescan\_keep\_filename().

#### **30.102.4.61 void Fl\_Widget::labeltype (Fl\_Labeltype *a*) [inline]**

Sets the label type.

The label type identifies the function that draws the label of the widget. This is generally used for special effects such as embossing or for using the [label\(\)](#) pointer as another form of data such as an icon. The value FL\_NORMAL\_LABEL prints the label as plain text.

**Parameters:**

← *a* new label type

See also:

[Fl\\_Labeltype](#)

#### **30.102.4.62 Fl\_Labeltype Fl\_Widget::labeltype () const [inline]**

Gets the label type.

**Returns:**

the current label type.

See also:

[Fl\\_Labeltype](#)

Referenced by `Fl_Button::draw()`, `Fl_Bitmap::label()`, and `Fl::reload_scheme()`.

#### **30.102.4.63 void Fl\_Widget::measure\_label (int & *ww*, int & *hh*) [inline]**

Sets width *ww*, height *hh* accordingly with the labeltype size, label with images will return `w()` `h()` of the image.

Referenced by `Fl_File_Chooser::ok_label()`.

#### **30.102.4.64 int Fl\_Widget::output () const [inline]**

Return if a widget is used for output only.

`output()` means the same as `!active()` except it does not change how the widget is drawn. The widget will not receive any events. This is useful for making scrollbars or buttons that work as displays rather than input devices.

Return values:

*0* if the widget is used for input and output

See also:

[set\\_output\(\)](#), [clear\\_output\(\)](#)

References OUTPUT.

#### **30.102.4.65 void Fl\_Widget::parent (Fl\_Group \* *p*) [inline]**

Internal use only.

Use `Fl_Group::add(Fl_Widget*)` instead.

#### **30.102.4.66 Fl\_Group\* Fl\_Widget::parent () const [inline]**

Returns a pointer to the parent widget.

Usually this is a `Fl_Group` or `Fl_Window`.

Return values:

*NULL* if the widget has no parent

See also:

[Fl\\_Group::add\(Fl\\_Widget\\*\)](#)

Referenced by `Fl::belowmouse()`, `Fl_Group::clear()`, `Fl_Tooltip::current()`, `damage()`, `default_callback()`, `Fl_Window::draw()`, `Fl_Browser::draw()`, `Fl_Group::end()`, `Fl_Value_Input::Fl_Value_Input()`, `Fl::focus()`, `Fl_Window::handle()`, `Fl::handle()`, `hide()`, `Fl_Window::hide()`, `Fl_Group::insert()`, `Fl_File_Chooser::ok_label()`, `Fl_File_Chooser::preview()`, `Fl_Scroll::scroll_to()`, `Fl_Button::setonly()`, and `window()`.

**30.102.4.67 void Fl\_Widget::position (int X, int Y) [inline]**

Reposition the window or widget.

position(X,Y) is a shortcut for resize(X,Y,[w\(\)](#),[h\(\)](#)).

**Parameters:**

← X,Y new position relative to the parent window

**See also:**

[resize\(int, int, int, int\)](#), [size\(int, int\)](#)

Reimplemented in [Fl\\_Input\\_](#).

References [Fl\\_Group::resize\(\)](#).

Referenced by [Fl\\_File\\_Chooser::add\\_extra\(\)](#), [Fl\\_Input\\_::cut\(\)](#), [Fl\\_Window::hotspot\(\)](#), [Fl\\_Input\\_::mark\(\)](#), [Fl\\_Help\\_Dialog::position\(\)](#), [Fl\\_Scroll::resize\(\)](#), and [Fl\\_Scroll::scroll\\_to\(\)](#).

**30.102.4.68 void Fl\_Widget::redraw ()**

Schedule the drawing of the widget.

Marks the widget as needing its [draw\(\)](#) routine called.

References [damage\(\)](#).

Referenced by [activate\(\)](#), [Fl\\_Chart::add\(\)](#), [Fl\\_Chart::bounds\(\)](#), [Fl\\_Check\\_Browser::check\\_all\(\)](#), [Fl\\_Check\\_Browser::check\\_none\(\)](#), [Fl\\_Check\\_Browser::checked\(\)](#), [Fl\\_Chart::clear\(\)](#), [damage\\_resize\(\)](#), [deactivate\(\)](#), [Fl\\_Value\\_Slider::handle\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Tabs::handle\(\)](#), [Fl\\_Slider::handle\(\)](#), [Fl\\_Roller::handle\(\)](#), [Fl\\_Menu\\_Button::handle\(\)](#), [Fl\\_Light\\_Button::handle\(\)](#), [Fl\\_Counter::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Browser\\_::handle\(\)](#), [Fl\\_Adjuster::handle\(\)](#), [Fl\\_Browser::hide\(\)](#), [Fl\\_File\\_Browser::iconsize\(\)](#), [Fl\\_Chart::insert\(\)](#), [Fl\\_Help\\_View::leftline\(\)](#), [Fl\\_Progress::maximum\(\)](#), [Fl\\_Chart::maxsize\(\)](#), [Fl\\_Progress::minimum\(\)](#), [Fl\\_Menu\\_::picked\(\)](#), [Fl\\_Menu\\_Button::popup\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), [Fl\\_Gl\\_Window::redraw\\_overlay\(\)](#), [Fl::reload\\_scheme\(\)](#), [Fl\\_Chart::replace\(\)](#), [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#), [Fl\\_Text\\_Display::resize\(\)](#), [Fl\\_Scroll::resize\(\)](#), [show\(\)](#), [Fl\\_Browser::show\(\)](#), [Fl\\_Help\\_View::topline\(\)](#), [Fl\\_Timer::value\(\)](#), [Fl\\_Progress::value\(\)](#), [Fl\\_Positioner::value\(\)](#), [Fl\\_File\\_Chooser::value\(\)](#), [Fl\\_Choice::value\(\)](#), [Fl\\_Button::value\(\)](#), [Fl\\_Positioner::xbounds\(\)](#), and [Fl\\_Positioner::ybounds\(\)](#).

**30.102.4.69 void Fl\_Widget::redraw\_label ()**

Schedule the drawing of the label.

Marks the widget or the parent as needing a redraw for the label area of a widget.

References [align\(\)](#), [box\(\)](#), [damage\(\)](#), [FL\\_ALIGN\\_BOTTOM](#), [FL\\_ALIGN\\_INSIDE](#), [FL\\_ALIGN\\_LEFT](#), [FL\\_ALIGN\\_RIGHT](#), [FL\\_ALIGN\\_TOP](#), [FL\\_NO\\_BOX](#), [h\(\)](#), [Fl\\_Label::measure\(\)](#), [w\(\)](#), [window\(\)](#), [x\(\)](#), and [y\(\)](#).

Referenced by [activate\(\)](#), [copy\\_label\(\)](#), [deactivate\(\)](#), [label\(\)](#), [show\(\)](#), and [Fl\\_Button::value\(\)](#).

**30.102.4.70 void Fl\_Widget::resize (int x, int y, int w, int h) [virtual]**

Change the size or position of the widget.

This is a virtual function so that the widget may implement its own handling of resizing. The default version does *not* call the [redraw\(\)](#) method, but instead relies on the parent widget to do so because the parent may know a faster way to update the display, such as scrolling from the old position.

Some window managers under X11 call [resize\(\)](#) a lot more often than needed. Please verify that the position or size of a widget did actually change before doing any extensive calculations.

[position\(x,y\)](#) is a shortcut for [resize\(x,y,w\(\),h\(\)\)](#), and [size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

**Parameters:**

← *x,y* new position relative to the parent window  
← *w,h* new size

**See also:**

[position\(int,int\)](#), [size\(int,int\)](#)

Reimplemented in [Fl\\_Browser\\_](#), [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Group](#), [Fl\\_Help\\_View](#), [Fl\\_Input\\_](#), [Fl\\_Input\\_Choice](#), [Fl\\_Overlay\\_Window](#), [Fl\\_Scroll](#), [Fl\\_Spinner](#), [Fl\\_Text\\_Display](#), [Fl\\_Tile](#), [Fl\\_Value\\_Input](#), and [Fl\\_Window](#).

Referenced by [damage\\_resize\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_File\\_Chooser::ok\\_label\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), [Fl\\_Tile::resize\(\)](#), [Fl\\_Spinner::resize\(\)](#), [Fl\\_Help\\_View::resize\(\)](#), [Fl\\_Group::resize\(\)](#), and [Fl\\_Browser\\_::resize\(\)](#).

**30.102.4.71 void Fl\_Widget::selection\_color (unsigned *a*) [inline]**

Gets or sets the selection color.

The selection color is defined for Forms compatibility and is usually used to color the widget when it is selected, although some widgets use this color for other purposes. You can set both colors at once with [color\(int,int\)](#).

**Parameters:**

← *a* the new selection color

**See also:**

[selection\\_color\(\)](#), [color\(unsigned,unsigned\)](#)

**30.102.4.72 Fl\_Color Fl\_Widget::selection\_color () const [inline]**

Gets the selection color.

**Returns:**

the current selection color

**See also:**

[selection\\_color\(unsigned\)](#), [color\(unsigned,unsigned\)](#)

Referenced by [Fl\\_Text\\_Display::clear\\_rect\(\)](#), [Fl\\_Menu\\_::down\\_color\(\)](#), [Fl\\_Button::down\\_color\(\)](#), [Fl\\_Timer::draw\(\)](#), [Fl\\_FormsPixmap::draw\(\)](#), [Fl\\_FormsBitmap::draw\(\)](#), [Fl\\_Value\\_Input::draw\(\)](#), [Fl\\_Tabs::draw\(\)](#), [Fl\\_Scrollbar::draw\(\)](#), [Fl\\_Return\\_Button::draw\(\)](#), [Fl\\_Menu\\_Item::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), [Fl\\_Dial::draw\(\)](#), [Fl\\_Clock\\_Output::draw\(\)](#), [Fl\\_Button::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#),

Fl\_Adjuster::draw(), Fl\_Text\_Display::draw\_string(), Fl\_Input\_::drawtext(), Fl\_Adjuster::Fl\_Adjuster(), Fl\_Check\_Button::Fl\_Check\_Button(), Fl\_Clock\_Output::Fl\_Clock\_Output(), Fl\_Counter::Fl\_Counter(), Fl\_Dial::Fl\_Dial(), Fl\_Light\_Button::Fl\_Light\_Button(), Fl\_Menu\_::Fl\_Menu\_(), Fl\_Positioner::Fl\_Positioner(), Fl\_Round\_Button::Fl\_Round\_Button(), Fl\_Timer::Fl\_Timer(), Fl\_Value\_Input::Fl\_Value\_Input(), and Fl\_Browser::item\_draw().

### 30.102.4.73 void Fl\_Widget::set\_changed () [inline]

Mark the value of the widget as changed.

See also:

[changed\(\)](#), [clear\\_changed\(\)](#)

Reimplemented in [Fl\\_Input\\_Choice](#).

References CHANGED.

Referenced by Fl\_Tile::handle(), Fl\_Text\_Editor::handle(), Fl\_Tabs::handle(), Fl\_Scrollbar::handle(), Fl\_Button::handle(), Fl\_Browser\_::handle(), Fl\_Valuator::handle\_drag(), Fl\_Text\_Editor::handle\_key(), Fl\_Color\_Chooser::hsv(), Fl\_Text\_Editor::kf\_backspace(), Fl\_Text\_Editor::kf\_cut(), Fl\_Text\_Editor::kf\_default(), Fl\_Text\_Editor::kf\_delete(), Fl\_Text\_Editor::kf\_enter(), Fl\_Text\_Editor::kf\_paste(), Fl\_Text\_Editor::kf\_undo(), Fl\_Help\_Dialog::load(), Fl\_Menu\_::picked(), Fl\_Input\_::replace(), Fl\_Color\_Chooser::rgb(), Fl\_Browser\_::select(), Fl\_Input\_Choice::set\_changed(), Fl\_Input\_::undo(), Fl\_Help\_View::value(), and Fl\_Help\_Dialog::value().

### 30.102.4.74 void Fl\_Widget::set\_output () [inline]

Set a widget to output only.

See also:

[output\(\)](#), [clear\\_output\(\)](#)

References OUTPUT.

### 30.102.4.75 void Fl\_Widget::set\_visible () [inline]

Makes the widget visible.

You must still redraw the parent widget to see a change in the window. Normally you want to use the [show\(\)](#) method instead.

References INVISIBLE.

Referenced by Fl\_Scroll::draw(), Fl\_Browser\_::draw(), Fl\_Window::hide(), and Fl\_Gl\_Window::show().

### 30.102.4.76 void Fl\_Widget::set\_visible\_focus () [inline]

Enables keyboard focus navigation with this widget.

Note, however, that this will not necessarily mean that the widget will accept focus, but for widgets that can accept focus, this method enables it if it has been disabled.

**See also:**

[visible\\_focus\(\)](#), [clear\\_visible\\_focus\(\)](#), [visible\\_focus\(int\)](#)

References VISIBLE\_FOCUS.

Referenced by [visible\\_focus\(\)](#).

### 30.102.4.77 void Fl\_Widget::show ()

Makes a widget visible.

An invisible widget never gets redrawn and does not get events. The [visible\(\)](#) method returns true if the widget is set to be visible. The [visible\\_r\(\)](#) method returns true if the widget and all of its parents are visible. A widget is only visible if [visible\(\)](#) is true on it *and all of its parents*.

Changing it will send FL\_SHOW or FL\_HIDE events to the widget. *Do not change it if the parent is not visible, as this will send false FL\_SHOW or FL\_HIDE events to the widget.* [redraw\(\)](#) is called if necessary on this or the parent.

**See also:**

[hide\(\)](#), [visible\(\)](#), [visible\\_r\(\)](#)

Reimplemented in [Fl\\_Browser](#), [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Menu\\_Window](#), [Fl\\_Overlay\\_Window](#), [Fl\\_Single\\_Window](#), and [Fl\\_Window](#).

References [clear\\_flag\(\)](#), [FL\\_SHOW](#), [Fl::focus\(\)](#), [handle\(\)](#), [inside\(\)](#), [INVISILE](#), [redraw\(\)](#), [redraw\\_label\(\)](#), [take\\_focus\(\)](#), [visible\(\)](#), and [visible\\_r\(\)](#).

Referenced by [Fl\\_Help\\_View::Fl\\_Help\\_View\(\)](#), [Fl::handle\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), [Fl\\_Browser::show\(\)](#), [Fl\\_Wizard::value\(\)](#), and [Fl\\_Tabs::value\(\)](#).

### 30.102.4.78 void Fl\_Widget::size (int W, int H) [inline]

Change the size of the widget.

[size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

**Parameters:**

← *W,H* new size

**See also:**

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented in [Fl\\_Browser](#), [Fl\\_Chart](#), [Fl\\_Help\\_View](#), [Fl\\_Input](#), and [Fl\\_Menu](#).

References [Fl\\_Group::resize\(\)](#).

Referenced by [Fl\\_File\\_Chooser::add\\_extra\(\)](#), [Fl\\_Text\\_Display::measure\\_vline\(\)](#), [Fl\\_Text\\_Display::resize\(\)](#), [Fl\\_Window::show\(\)](#), [Fl\\_Menu::size\(\)](#), [Fl\\_Input::size\(\)](#), [Fl\\_Help\\_View::size\(\)](#), [Fl\\_Chart::size\(\)](#), and [Fl\\_Browser::size\(\)](#).

### 30.102.4.79 int Fl\_Widget::take\_focus ()

Give the widget the keyboard focus.

Tries to make this widget be the [Fl::focus\(\)](#) widget, by first sending it an FL\_FOCUS event, and if it returns non-zero, setting [Fl::focus\(\)](#) to this widget. You should use this method to assign the focus to a widget.

**Returns:**

true if the widget accepted the focus.

References contains(), FL\_FOCUS, Fl::focus(), handle(), takesevents(), and visible\_focus().

Referenced by activate(), Fl\_Group::focus(), Fl\_Value\_Input::handle(), Fl\_Spinner::handle(), Fl\_Input::handle(), Fl\_Group::handle(), show(), and Fl\_File\_Chooser::show().

### 30.102.4.80 int Fl\_Widget::takesevents () const [inline]

Returns if the widget is able to take events.

This is the same as ([active\(\)](#) && ![output\(\)](#) && [visible\(\)](#)) but is faster.

**Return values:**

0 if the widget takes no events

References INACTIVE, INVISIBLE, and OUTPUT.

Referenced by Fl\_Group::handle(), and take\_focus().

### 30.102.4.81 int Fl\_Widget::test\_shortcut (const char \* t) [static]

Internal use only.

References Fl::event\_text(), and label\_shortcut().

### 30.102.4.82 int Fl\_Widget::test\_shortcut ()

Internal use only.

Reimplemented in [Fl\\_Menu\\_](#).

References flags(), label(), and SHORTCUT\_LABEL.

Referenced by Fl\_Text\_Editor::handle(), Fl\_Text\_Display::handle(), Fl\_Tabs::handle(), Fl\_Menu\_Button::handle(), Fl\_Choice::handle(), and Fl\_Button::handle().

### 30.102.4.83 void Fl\_Widget::tooltip (const char \* t)

Sets the current tooltip text.

Sets a string of text to display in a popup tooltip window when the user hovers the mouse over the widget. The string is *not* copied, so make sure any formatted string is stored in a static, global, or allocated buffer.

If no tooltip is set, the tooltip of the parent is inherited. Setting a tooltip for a group and setting no tooltip for a child will show the group's tooltip instead. To avoid this behavior, you can set the child's tooltip to an empty string ("").

**Parameters:**

← t new tooltip

**30.102.4.84 const char\* Fl\_Widget::tooltip () const [inline]**

Gets the current tooltip text.

**Returns:**

a pointer to the tooltip text or NULL

Referenced by Fl\_Tooltip::current(), Fl\_File\_Chooser::Fl\_File\_Chooser(), and Fl\_Help\_Dialog::Fl\_Help\_Dialog().

**30.102.4.85 void Fl\_Widget::type (uchar *t*) [inline]**

Sets the widget type.

This is used for Forms compatibility.

Reimplemented in [Fl\\_Spinner](#).

**30.102.4.86 uchar Fl\_Widget::type () const [inline]**

Gets the widget type.

Returns the widget type value, which is used for Forms compatibility and to simulate RTTI.

Reimplemented in [Fl\\_Spinner](#).

Referenced by damage(), Fl\_Browser\_::deselect(), Fl\_Timer::draw(), Fl\_Scroll::draw(), Fl\_Return\_Button::draw(), Fl\_Menu\_Button::draw(), Fl\_Dial::draw(), Fl\_Counter::draw(), Fl\_Clock\_Output::draw(), Fl\_Chart::draw(), Fl\_Button::draw(), Fl\_Group::draw\_child(), Fl\_Browser\_::Fl\_Browser\_(), Fl\_Check\_Browser::Fl\_Check\_Browser(), Fl\_Clock::Fl\_Clock(), Fl\_Double\_Window::Fl\_Double\_Window(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Fill\_Dial::Fl\_Fill\_Dial(), Fl\_Fill\_Slider::Fl\_Fill\_Slider(), Fl\_Float\_Input::Fl\_Float\_Input(), Fl\_Free::Fl\_Free(), Fl\_Help\_View::Fl\_Help\_View(), Fl\_Hold\_Browser::Fl\_Hold\_Browser(), Fl\_Int\_Input::Fl\_Int\_Input(), Fl\_Light\_Button::Fl\_Light\_Button(), Fl\_Multi\_Browser::Fl\_Multi\_Browser(), Fl\_Multiline\_Input::Fl\_Multiline\_Input(), Fl\_Multiline\_Output::Fl\_Multiline\_Output(), Fl\_Output::Fl\_Output(), Fl\_Round\_Clock::Fl\_Round\_Clock(), Fl\_Scroll::Fl\_Scroll(), Fl\_Secret\_Input::Fl\_Secret\_Input(), Fl\_Select\_Browser::Fl\_Select\_Browser(), Fl\_Slider::Fl\_Slider(), Fl\_Spinner::Fl\_Spinner(), Fl\_Timer::Fl\_Timer(), Fl\_Toggle\_Button::Fl\_Toggle\_Button(), Fl\_Group::forms\_end(), Fl\_Free::handle(), Fl\_Value\_Input::handle(), Fl\_Scrollbar::handle(), Fl\_Menu\_Button::handle(), Fl\_Button::handle(), Fl\_Browser\_::handle(), Fl\_Window::handle(), Fl\_Valuator::horizontal(), Fl\_Pack::horizontal(), Fl\_Input::input\_type(), Fl\_Menu\_Button::popup(), Fl\_Input::readonly(), Fl\_Group::resize(), Fl\_Browser\_::select(), Fl\_Browser\_::select\_only(), Fl\_Button::setonly(), Fl\_Group::sizes(), Fl\_Spinner::step(), Fl\_Spinner::type(), Fl\_File\_Chooser::type(), Fl\_Group::update\_child(), Fl\_Timer::value(), and Fl\_Input::wrap().

**30.102.4.87 void Fl\_Widget::user\_data (void \* *v*) [inline]**

Sets the user data for this widget.

Sets the new user data (void \*) argument that is passed to the callback function.

**Parameters:**

← *v* new user data

**30.102.4.88 void\* Fl\_Widget::user\_data () const [inline]**

Gets the user data for this widget.

Gets the current user data (void \*) argument that is passed to the callback function.

**Returns:**

user data as a pointer

Referenced by Fl\_File\_Chooser::Fl\_File\_Chooser(), and Fl\_Help\_Dialog::Fl\_Help\_Dialog().

**30.102.4.89 int Fl\_Widget::visible () const [inline]**

Returns whether a widget is visible.

**Return values:**

*0* if the widget is not drawn and hence invisible.

**See also:**

[show\(\)](#), [hide\(\)](#), [visible\\_r\(\)](#)

References INVISIBLE.

Referenced by Fl\_Browser\_::bbox(), Fl\_Scroll::draw(), Fl\_Pack::draw(), Fl\_Browser\_::draw(), Fl\_Group::draw\_child(), Fl\_Group::draw\_outside\_label(), Fl\_Tabs::handle(), Fl\_Group::handle(), Fl\_Window::handle(), Fl\_Scroll::resize(), show(), Fl\_Group::update\_child(), Fl\_Wizard::value(), Fl\_Tabs::value(), Fl\_Help\_Dialog::visible(), and Fl\_File\_Chooser::visible().

**30.102.4.90 int Fl\_Widget::visible\_focus () [inline]**

Check whether this widget has a visible focus.

**Return values:**

*0* if this widget has no visible focus.

**See also:**

[visible\\_focus\(int\)](#), [set\\_visible\\_focus\(\)](#), [clear\\_visible\\_focus\(\)](#)

References VISIBLE\_FOCUS.

Referenced by Fl\_Window::show(), and take\_focus().

**30.102.4.91 void Fl\_Widget::visible\_focus (int *v*) [inline]**

Modifies keyboard focus navigation.

**Parameters:**

← *v* set or clear visible focus

**See also:**

[set\\_visible\\_focus\(\)](#), [clear\\_visible\\_focus\(\)](#), [visible\\_focus\(\)](#)

References [clear\\_visible\\_focus\(\)](#), and [set\\_visible\\_focus\(\)](#).

Referenced by [Fl::focus\(\)](#).

**30.102.4.92 int Fl\_Widget::visible\_r () const**

Returns whether a widget and all its parents are visible.

**Return values:**

0 if the widget or any of its parents are invisible.

**See also:**

[show\(\)](#), [hide\(\)](#), [visible\(\)](#)

Referenced by [Fl\\_Text\\_Display::buffer\\_modified\\_cb\(\)](#), [Fl\\_Text\\_Display::draw\\_line\\_numbers\(\)](#), [Fl::flush\(\)](#), [Fl\\_Menu\\_Bar::handle\(\)](#), [hide\(\)](#), and [show\(\)](#).

**30.102.4.93 int Fl\_Widget::w () const [inline]**

Gets the widget width.

**Returns:**

the width of the widget in pixels.

Referenced by [Fl\\_Browser\\_::bbox\(\)](#), [Fl\\_Text\\_Display::buffer\(\)](#), [damage\(\)](#), [damage\\_resize\(\)](#), [Fl\\_Glut\\_Window::draw\(\)](#), [Fl\\_Timer::draw\(\)](#), [Fl\\_FormsPixmap::draw\(\)](#), [Fl\\_FormsBitmap::draw\(\)](#), [Fl\\_Window::draw\(\)](#), [Fl\\_Value\\_Slider::draw\(\)](#), [Fl\\_Value\\_Output::draw\(\)](#), [Fl\\_Text\\_Display::draw\(\)](#), [Fl\\_Tabs::draw\(\)](#), [Fl\\_Slider::draw\(\)](#), [Fl\\_Scrollbar::draw\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Roller::draw\(\)](#), [Fl\\_Return\\_Button::draw\(\)](#), [Fl\\_Progress::draw\(\)](#), [Fl\\_Positioner::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Menu\\_Button::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), [Fl\\_Input::draw\(\)](#), [Fl\\_File\\_Input::draw\(\)](#), [Fl\\_Dial::draw\(\)](#), [Fl\\_Counter::draw\(\)](#), [Fl\\_Clock\\_Output::draw\(\)](#), [Fl\\_Choice::draw\(\)](#), [Fl\\_Chart::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Adjuster::draw\(\)](#), [Fl\\_Group::draw\\_children\(\)](#), [draw\\_focus\(\)](#), [Fl\\_Group::draw\\_outside\\_label\(\)](#), [Fl\\_Glut\\_Window::draw\\_overlay\(\)](#), [Fl\\_Gl\\_Window::flush\(\)](#), [Fl\\_Double\\_Window::flush\(\)](#), [Fl\\_Group::forms\\_end\(\)](#), [Fl\\_Window::fullscreen\(\)](#), [Fl\\_Value\\_Slider::handle\(\)](#), [Fl\\_Slider::handle\(\)](#), [Fl\\_Scrollbar::handle\(\)](#), [Fl\\_Positioner::handle\(\)](#), [Fl\\_Menu\\_Bar::handle\(\)](#), [Fl\\_Input::handle\(\)](#), [Fl\\_Dial::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Browser\\_::handle\(\)](#), [Fl\\_Adjuster::handle\(\)](#), [Fl\\_Window::hotspot\(\)](#), [Fl\\_Help\\_View::leftline\(\)](#), [Fl\\_Gl\\_Window::make\\_current\(\)](#), [Fl\\_Gl\\_Window::ortho\(\)](#), [Fl\\_Menu\\_Button::popup\(\)](#), [redraw\\_label\(\)](#), [Fl\\_Tile::resize\(\)](#), [Fl\\_Text\\_Display::resize\(\)](#), [Fl\\_Scroll::resize\(\)](#), [Fl\\_Overlay\\_Window::resize\(\)](#), [Fl\\_Input\\_::resize\(\)](#), [Fl\\_Help\\_View::resize\(\)](#), [Fl\\_Group::resize\(\)](#), [Fl\\_Gl\\_Window::resize\(\)](#), [Fl\\_Double\\_Window::resize\(\)](#), [Fl\\_Text\\_Display::scroll\(\)](#), [Fl\\_Window::show\(\)](#), [Fl\\_Text\\_Display::show\\_insert\\_position\(\)](#), [Fl\\_Group::sizes\(\)](#), and [Fl\\_Text\\_Display::wrap\\_mode\(\)](#).

**30.102.4.94 void Fl\_Widget::w (int v) [inline, protected]**

Internal use only.

Use [position\(int,int\)](#), [size\(int, int\)](#) or [resize\(int,int,int,int\)](#) instead.

Referenced by Fl\_File\_Chooser::add\_extra(), Fl\_Text\_Display::buffer\_modified\_cb(), Fl::cairo\_make\_current(), damage(), Fl\_Scroll::draw(), Fl\_Pack::draw(), Fl\_Group::draw\_child(), Fl\_Text\_Display::draw\_line\_numbers(), Fl\_Group::draw\_outside\_label(), Fl::first\_window(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Group::forms\_end(), Fl\_Tile::handle(), Fl\_Window::hotspot(), Fl::next\_window(), Fl\_Tile::position(), Fl\_File\_Chooser::preview(), Fl\_File\_Chooser::rescan\_keep\_filename(), Fl\_Tile::resize(), Fl\_Scroll::resize(), Fl\_Group::resize(), Fl\_Group::sizes(), Fl\_Group::update\_child(), and Fl\_Help\_Dialog::w().

### 30.102.4.95 void Fl\_Widget::when (uchar *i*) [inline]

Flags used to decide when a callback is called.

[Fl\\_Widget::when\(\)](#) is a set of bitflags used by subclasses of [Fl\\_Widget](#) to decide when to do the callback. If the value is zero then the callback is never done. Other values are described in the individual widgets. This field is in the base class so that you can scan a panel and [do\\_callback\(\)](#) on all the ones that don't do their own callbacks in response to an "OK" button.

**Parameters:**

← *i* set of flags

### 30.102.4.96 Fl\_When Fl\_Widget::when () const [inline]

Controls when callbacks are done.

The following values are useful, the default value is FL\_WHEN\_RELEASE:

- 0: The callback is not done, but [changed\(\)](#) is turned on.
- FL\_WHEN\_CHANGED: The callback is done each time the text is changed by the user.
- FL\_WHEN\_RELEASE: The callback will be done when this widget loses the focus, including when the window is unmapped. This is a useful value for text fields in a panel where doing the callback on every change is wasteful. However the callback will also happen if the mouse is moved out of the window, which means it should not do anything visible (like pop up an error message). You might do better setting this to zero, and scanning all the items for [changed\(\)](#) when the OK button on a panel is pressed.
- FL\_WHEN\_ENTER\_KEY: If the user types the Enter key, the entire text is selected, and the callback is done if the text has changed. Normally the Enter key will navigate to the next field (or insert a newline for a Fl\_Multiline\_Input), this changes the behavior.
- FL\_WHEN\_ENTER\_KEY|FL\_WHEN\_NOT\_CHANGED: The Enter key will do the callback even if the text has not changed. Useful for command fields.

Return the conditions under which the callback is called.

**Returns:**

set of flags

Referenced by Fl\_Browser\_::Fl\_Browser\_(), Fl\_Check\_Browser::Fl\_Check\_Browser(), Fl\_Choice::Fl\_Choice(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Help\_Dialog::Fl\_Help\_Dialog(), Fl\_Input\_Choice::Fl\_Input\_Choice(), Fl\_Menu\_::Fl\_Menu\_(), Fl\_Positioner::Fl\_Positioner(), Fl\_Spinner::Fl\_Spinner(), Fl\_Valuator::Fl\_Valuator(), Fl\_Value\_Input::Fl\_Value\_Input(), Fl\_Value\_Input::handle(),

`Fl_Text_Editor::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Valuator::handle_drag()`, `Fl_Text_Editor::handle_key()`, `Fl_Valuator::handle_release()`, `Fl_Text_Editor::kf_backspace()`, `Fl_Text_Editor::kf_cut()`, `Fl_Text_Editor::kf_default()`, `Fl_Text_Editor::kf_delete()`, `Fl_Text_Editor::kf_enter()`, `Fl_Text_Editor::kf_paste()`, `Fl_Text_Editor::kf_undo()`, `Fl_Text_Editor::maybe_do_callback()`, `Fl_Menu_::picked()`, `Fl_Input_::replace()`, and `Fl_Input_::undo()`.

#### 30.102.4.97 `Fl_Window * Fl_Widget::window () const`

Returns a pointer to the primary `Fl_Window` widget.

**Return values:**

`NULL` if no window is associated with this widget.

**Note:**

for an `Fl_Window` widget, this returns its *parent* window (if any), not *this* window.

References `FL_WINDOW`, and `parent()`.

Referenced by `Fl_File_Chooser::Fl_File_Chooser()`, `Fl::focus()`, `Fl_Group::forms_end()`, `Fl_Text_Editor::handle()`, `Fl_Text_Display::handle()`, `Fl_Input::handle()`, `Fl_File_Input::handle()`, `Fl_Button::handle()`, `Fl::handle()`, `Fl_Window::hide()`, `Fl_Window::hotspot()`, `Fl_Gl_Window::make_current()`, `Fl_Menu_Item::popup()`, `redraw_label()`, `Fl_Scroll::scroll_to()`, `Fl_Wizard::value()`, `Fl_Window::x_root()`, and `Fl_Window::y_root()`.

#### 30.102.4.98 `int Fl_Widget::x () const [inline]`

Gets the widget position in its window.

**Returns:**

the x position relative to the window

Referenced by `Fl_Browser_::bbox()`, `Fl_Text_Display::buffer()`, `damage()`, `damage_resize()`, `Fl_Timer::draw()`, `Fl_FormsPixmap::draw()`, `Fl_FormsBitmap::draw()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Text_Display::draw()`, `Fl_Tabs::draw()`, `Fl_Slider::draw()`, `Fl_Scrollbar::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Return_Button::draw()`, `Fl_Progress::draw()`, `Fl_Positioner::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Button::draw()`, `Fl_Menu_Bar::draw()`, `Fl_Light_Button::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `Fl_Group::draw_children()`, `draw_focus()`, `Fl_Group::draw_outside_label()`, `Fl_Group::forms_end()`, `Fl_Window::fullscreen()`, `Fl_Value_Slider::handle()`, `Fl_Tile::handle()`, `Fl_Slider::handle()`, `Fl_Scrollbar::handle()`, `Fl_Positioner::handle()`, `Fl_Menu_Bar::handle()`, `Fl_Input::handle()`, `Fl_Dial::handle()`, `Fl_Choice::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Adjuster::handle()`, `Fl_Window::hotspot()`, `Fl_Gl_Window::make_current()`, `Fl_Menu_Button::popup()`, `redraw_label()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `Fl_Help_View::resize()`, `Fl_Group::resize()`, `Fl_Gl_Window::resize()`, `Fl_Text_Display::scroll()`, `Fl_Window::show()`, `Fl_Text_Display::show_insert_position()`, `Fl_Group::sizes()`, `Fl_Text_Display::wrap_mode()`, and `Fl_Window::x_root()`.

#### 30.102.4.99 `void Fl_Widget::x (int v) [inline, protected]`

Internal use only.

Use [position\(int,int\)](#), [size\(int, int\)](#) or [resize\(int,int,int,int\)](#) instead.

Referenced by [Fl\\_Text\\_Display::buffer\\_modified\\_cb\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Group::draw\\_child\(\)](#), [Fl\\_Group::draw\\_outside\\_label\(\)](#), [Fl::event\\_inside\(\)](#), [Fl\\_Group::forms\\_end\(\)](#), [Fl\\_Tile::handle\(\)](#), [Fl\\_Window::hotspot\(\)](#), [Fl\\_File\\_Chooser::ok\\_label\(\)](#), [Fl\\_Tile::position\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), [Fl\\_Tile::resize\(\)](#), [Fl\\_Group::resize\(\)](#), [Fl\\_Scroll::scroll\\_to\(\)](#), [Fl\\_Group::sizes\(\)](#), [Fl\\_Group::update\\_child\(\)](#), and [Fl\\_Help\\_Dialog::x\(\)](#).

### **30.102.4.100 int Fl\_Widget::y () const [inline]**

Gets the widget position in its window.

**Returns:**

the y position relative to the window

Referenced by [Fl\\_Browser\\_::bbox\(\)](#), [Fl\\_Text\\_Display::buffer\(\)](#), [damage\(\)](#), [damage\\_resize\(\)](#), [Fl\\_Timer::draw\(\)](#), [Fl\\_FormsPixmap::draw\(\)](#), [Fl\\_FormsBitmap::draw\(\)](#), [Fl\\_Window::draw\(\)](#), [Fl\\_Value\\_Slider::draw\(\)](#), [Fl\\_Value\\_Output::draw\(\)](#), [Fl\\_Text\\_Display::draw\(\)](#), [Fl\\_Tabs::draw\(\)](#), [Fl\\_Slider::draw\(\)](#), [Fl\\_Scrollbar::draw\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Roller::draw\(\)](#), [Fl\\_Return\\_Button::draw\(\)](#), [Fl\\_Progress::draw\(\)](#), [Fl\\_Positioner::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Menu\\_Button::draw\(\)](#), [Fl\\_Menu\\_Bar::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), [Fl\\_Input::draw\(\)](#), [Fl\\_File\\_Input::draw\(\)](#), [Fl\\_Dial::draw\(\)](#), [Fl\\_Counter::draw\(\)](#), [Fl\\_Clock\\_Output::draw\(\)](#), [Fl\\_Choice::draw\(\)](#), [Fl\\_Chart::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Adjuster::draw\(\)](#), [Fl\\_Group::draw\\_children\(\)](#), [draw\\_focus\(\)](#), [Fl\\_Text\\_Display::draw\\_line\\_numbers\(\)](#), [Fl\\_Group::draw\\_outside\\_label\(\)](#), [Fl\\_Group::forms\\_end\(\)](#), [Fl\\_Window::fullscreen\(\)](#), [Fl\\_Value\\_Slider::handle\(\)](#), [Fl\\_Tile::handle\(\)](#), [Fl\\_Tabs::handle\(\)](#), [Fl\\_Slider::handle\(\)](#), [Fl\\_Scrollbar::handle\(\)](#), [Fl\\_Positioner::handle\(\)](#), [Fl\\_Menu\\_Bar::handle\(\)](#), [Fl\\_Input::handle\(\)](#), [Fl\\_File\\_Input::handle\(\)](#), [Fl\\_Dial::handle\(\)](#), [Fl\\_Choice::handle\(\)](#), [Fl\\_Button::handle\(\)](#), [Fl\\_Adjuster::handle\(\)](#), [Fl\\_Gl\\_Window::make\\_current\(\)](#), [Fl\\_Menu\\_Button::popup\(\)](#), [redraw\\_label\(\)](#), [Fl\\_Tile::resize\(\)](#), [Fl\\_Scroll::resize\(\)](#), [Fl\\_Help\\_View::resize\(\)](#), [Fl\\_Group::resize\(\)](#), [Fl\\_Gl\\_Window::resize\(\)](#), [Fl\\_Text\\_Display::scroll\(\)](#), [Fl\\_Window::show\(\)](#), [Fl\\_Text\\_Display::show\\_insert\\_position\(\)](#), [Fl\\_Group::sizes\(\)](#), [Fl\\_Text\\_Display::wrap\\_mode\(\)](#), and [Fl\\_Window::y\\_root\(\)](#).

### **30.102.4.101 void Fl\_Widget::y (int v) [inline, protected]**

Internal use only.

Use [position\(int,int\)](#), [size\(int, int\)](#) or [resize\(int,int,int,int\)](#) instead.

Referenced by [Fl\\_File\\_Chooser::add\\_extra\(\)](#), [Fl\\_Text\\_Display::buffer\\_modified\\_cb\(\)](#), [Fl\\_Scroll::draw\(\)](#), [Fl\\_Pack::draw\(\)](#), [Fl\\_Browser\\_::draw\(\)](#), [Fl\\_Group::draw\\_child\(\)](#), [Fl\\_Group::draw\\_outside\\_label\(\)](#), [Fl::event\\_inside\(\)](#), [Fl\\_Group::forms\\_end\(\)](#), [Fl\\_Tile::handle\(\)](#), [Fl\\_Window::hotspot\(\)](#), [Fl\\_File\\_Chooser::ok\\_label\(\)](#), [Fl\\_Tile::position\(\)](#), [Fl\\_File\\_Chooser::preview\(\)](#), [Fl\\_Tile::resize\(\)](#), [Fl\\_Group::resize\(\)](#), [Fl\\_Scroll::scroll\\_to\(\)](#), [Fl\\_Group::sizes\(\)](#), [Fl\\_Group::update\\_child\(\)](#), and [Fl\\_Help\\_Dialog::y\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Widget.H](#)
- [Fl.cxx](#)
- [fl\\_boxtype.cxx](#)
- [fl\\_labeltype.cxx](#)
- [fl\\_shortcut.cxx](#)
- [Fl\\_Tooltip.cxx](#)
- [Fl\\_Widget.cxx](#)
- [Fl\\_Window.cxx](#)

## 30.103 Fl\_Window Class Reference

This widget produces an actual window.

```
#include <Fl_Window.h>
```

Inheritance diagram for Fl\_Window::

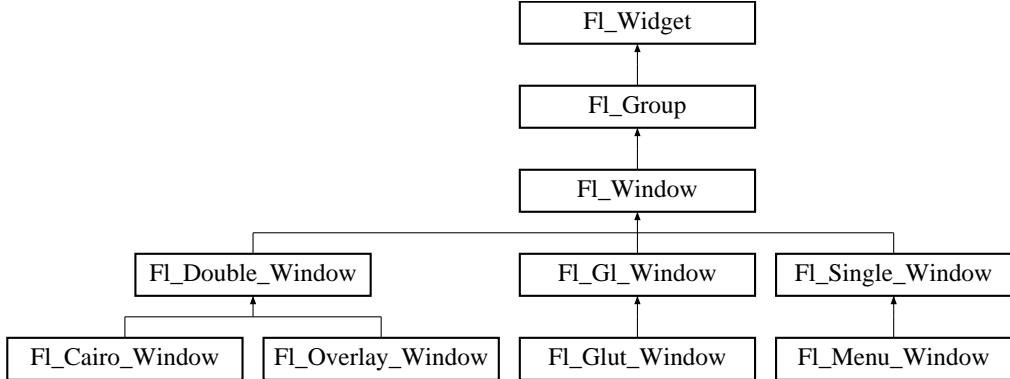

### Public Member Functions

- [Fl\\_Window \(int w, int h, const char \\*title=0\)](#)  
*Creates a window from the given size and title.*
- [Fl\\_Window \(int x, int y, int w, int h, const char \\*title=0\)](#)  
*Creates a window from the given position, size and title.*
- virtual [~Fl\\_Window \(\)](#)  
*The destructor also deletes all the children.*
- virtual int [handle \(int\)](#)  
*Handles the specified event.*
- virtual void [resize \(int, int, int, int\)](#)  
*Changes the size and position of the window.*
- void [border \(int b\)](#)  
*Gets or sets whether or not the window manager border is around the window.*
- void [clear\\_border \(\)](#)  
*Fast inline function to turn the border off.*
- int [border \(\) const](#)  
*See int [Fl\\_Window::border\(int\)](#).*
- void [set\\_override \(\)](#)  
*Activate the flags [FL\\_NOBORDER|FL\\_OVERRIDE](#).*
- int [override \(\) const](#)

*Returns non zero if FL\_OVERRIDE flag is set, 0 otherwise.*

- **void set\_modal ()**

A "modal" window, when [shown\(\)](#), will prevent any events from being delivered to other windows in the same program, and will also remain on top of the other windows (if the X window manager supports the "transient for" property).

- **int modal () const**

*Returns true if this window is modal.*

- **void set\_non\_modal ()**

A "non-modal" window (terminology borrowed from Microsoft Windows) acts like a [modal\(\)](#) one in that it remains on top, but it has no effect on event delivery.

- **int non\_modal () const**

*Returns true if this window is modal or non-modal.*

- **void hotspot (int x, int y, int offscreen=0)**

*Position the window so that the mouse is pointing at the given position, or at the center of the given widget, which may be the window itself.*

- **void hotspot (const Fl\_Widget \*, int offscreen=0)**

*See void [Fl\\_Window::hotspot\(int x, int y, int offscreen = 0\)](#).*

- **void hotspot (const Fl\_Widget &p, int offscreen=0)**

*See void [Fl\\_Window::hotspot\(int x, int y, int offscreen = 0\)](#).*

- **void free\_position ()**

*Undoes the effect of a previous [resize\(\)](#) or [show\(\)](#) so that the next time [show\(\)](#) is called the window manager is free to position the window.*

- **void size\_range (int a, int b, int c=0, int d=0, int e=0, int f=0, int g=0)**

*Set the allowable range the user can resize this window to.*

- **const char \* label () const**

*See void [Fl\\_Window::label\(const char\\*\)](#).*

- **const char \* iconlabel () const**

*See void [Fl\\_Window::iconlabel\(const char\\*\)](#).*

- **void label (const char \*)**

*Sets the window title bar label.*

- **void iconlabel (const char \*)**

*Sets the icon label.*

- **void label (const char \*label, const char \*iconlabel)**

*Gets or sets the icon label.*

- **void copy\_label (const char \*a)**

*Sets the current label.*

- const char \* **xclass** () const

*See void [Fl\\_Window::xclass\(const char\\*\)](#).*

- void **xclass** (const char \*c)

*A string used to tell the system what type of window this is.*

- const void \* **icon** () const

*Gets the current icon window target dependent data.*

- void **icon** (const void \*ic)

*Sets the current icon window target dependent data.*

- int **shown** ()

*Returns non-zero if [show\(\)](#) has been called (but not [hide\(\)](#) ).*

- virtual void **show** ()

*Put the window on the screen.*

- virtual void **hide** ()

*Remove the window from the screen.*

- void **show** (int, char \*\*)

*See virtual void [Fl\\_Window::show\(\)](#).*

- void **fullscreen** ()

*Makes the window completely fill the screen, without any window manager border visible.*

- void **fullscreen\_off** (int, int, int, int)

*Turns off any side effects of [fullscreen\(\)](#) and does resize(x,y,w,h).*

- void **iconize** ()

*Iconifies the window.*

- int **x\_root** () const

*Gets the x position of the window on the screen.*

- int **y\_root** () const

*Gets the y position of the window on the screen.*

- void **make\_current** ()

*Sets things up so that the drawing functions in <[FL/fl\\_draw.H](#)> will go into this window.*

- void **cursor** (Fl\_Cursor, Fl\_Color=FL\_BLACK, Fl\_Color=FL\_WHITE)

*Changes the cursor for this window.*

- void **default\_cursor** (Fl\_Cursor, Fl\_Color=FL\_BLACK, Fl\_Color=FL\_WHITE)

*Sets the default Window cursor as well as its color.*

## Static Public Member Functions

- static [Fl\\_Window \\* current\(\)](#)  
*Returns the last window that was made current.*
- static void [default\\_callback\(Fl\\_Window \\*, void \\*v\)](#)  
*Back compatibility: Sets the default callback v for win to call on close event.*

## Protected Member Functions

- virtual void [draw\(\)](#)  
*Draw the widget.*
- virtual void [flush\(\)](#)  
*Forces the window to be drawn, this window is also made current and calls draw().*

## Static Protected Attributes

- static [Fl\\_Window \\* current\\_](#)  
*Stores the last window that was made current.*

## Friends

- class [Fl\\_X](#)

### 30.103.1 Detailed Description

This widget produces an actual window.

This can either be a main window, with a border and title and all the window management controls, or a "subwindow" inside a window. This is controlled by whether or not the window has a [parent\(\)](#).

Once you create a window, you usually add children [Fl\\_Widget](#)'s to it by using `window->add(child)` for each new widget. See [Fl\\_Group](#) for more information on how to add and remove children.

There are several subclasses of [Fl\\_Window](#) that provide double-buffering, overlay, menu, and OpenGL support.

The window's callback is done if the user tries to close a window using the window manager and `Fl::modal()` is zero or equal to the window. [Fl\\_Window](#) has a default callback that calls [Fl\\_Window::hide\(\)](#).

### 30.103.2 Constructor & Destructor Documentation

#### 30.103.2.1 [Fl\\_Window::Fl\\_Window \(int w, int h, const char \\* title = 0\)](#)

Creates a window from the given size and title.

If [Fl\\_Group::current\(\)](#) is not NULL, the window is created as a subwindow of the parent window.

The first form of the constructor creates a top-level window and asks the window manager to position the window. The second form of the constructor either creates a subwindow or a top-level window at the specified location (x,y) , subject to window manager configuration. If you do not specify the position of the window, the window manager will pick a place to show the window or allow the user to pick a location. Use `position(x,y)` or `hotspot()` before calling `show()` to request a position on the screen. See `Fl_Window::resize()` for some more details on positioning windows.

Top-level windows initially have `visible()` set to 0 and `parent()` set to NULL. Subwindows initially have `visible()` set to 1 and `parent()` set to the parent window pointer.

`Fl_Widget::box()` defaults to FL\_FLAT\_BOX. If you plan to completely fill the window with children widgets you should change this to FL\_NO\_BOX. If you turn the window border off you may want to change this to FL\_UP\_BOX.

References `Fl_Widget::clear_visible()`.

### 30.103.2.2 Fl\_Window::Fl\_Window (int x, int y, int w, int h, const char \*title = 0)

Creates a window from the given position, size and title.

See `Fl_Window::Fl_Window(int w, int h, const char *title = 0)`

References `Fl_Widget::set_flag()`.

### 30.103.2.3 Fl\_Window::~Fl\_Window () [virtual]

The destructor *also deletes all the children*.

This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the `Fl_Window` and all of it's children can be automatic (local) variables, but you must declare the `Fl_Window` *first* so that it is destroyed last.

References `hide()`.

## 30.103.3 Member Function Documentation

### 30.103.3.1 void Fl\_Window::border (int b)

Gets or sets whether or not the window manager border is around the window.

The default value is true. `border(n)` can be used to turn the border on and off, and returns non-zero if the value has been changed. *Under most X window managers this does not work after `show()` has been called, although SGI's 4DWM does work.*

References `border()`, `Fl_Widget::clear_flag()`, `Fl_Widget::set_flag()`, and `shown()`.

### 30.103.3.2 void Fl\_Window::clear\_border () [inline]

Fast inline function to turn the border off.

It only works before `show()` is called.

References `Fl_Widget::set_flag()`.

**30.103.3.3 void Fl\_Window::copy\_label (const char \* new\_label)**

Sets the current label.

Unlike [label\(\)](#), this method allocates a copy of the label string instead of using the original string pointer.

**Parameters:**

← *new\_label* the new label text

**See also:**

[label\(\)](#)

Reimplemented from [Fl\\_Widget](#).

References [Fl\\_Widget::clear\\_flag\(\)](#), [Fl\\_Widget::COPIED\\_LABEL](#), [Fl\\_Widget::flags\(\)](#), [iconlabel\(\)](#), [label\(\)](#), and [Fl\\_Widget::set\\_flag\(\)](#).

**30.103.3.4 Fl\_Window \* Fl\_Window::current () [static]**

Returns the last window that was made current.

**See also:**

[Fl\\_Window::make\\_current\(\)](#)

Reimplemented from [Fl\\_Group](#).

References [current\\_](#).

**30.103.3.5 void Fl\_Window::cursor (Fl\_Cursor *c*, Fl\_Color *fg* = FL\_BLACK, Fl\_Color *bg* = FL\_WHITE)**

Changes the cursor for this window.

This always calls the system, if you are changing the cursor a lot you may want to keep track of how you set it in a static variable and call this only if the new cursor is different.

The type [Fl\\_Cursor](#) is an enumeration defined in [<Enumerations.H>](#). (Under X you can get any XC\_cursor value by passing [Fl\\_Cursor\(\(XC\\_foo/2\)+1\)](#)). The colors only work on X, they are not implemented on WIN32.

For back compatibility only.

References [Fl::get\\_color\(\)](#), and [shown\(\)](#).

Referenced by [default\\_cursor\(\)](#), [Fl\\_Gl\\_Window::flush\(\)](#), [Fl\\_Text\\_Editor::handle\(\)](#), [Fl\\_Text\\_Display::handle\(\)](#), [Fl\\_Input::handle\(\)](#), [Fl\\_File\\_Input::handle\(\)](#), [hide\(\)](#), [Fl\\_File\\_Chooser::rescan\\_keep\\_filename\(\)](#), and [Fl\\_Wizard::value\(\)](#).

**30.103.3.6 void Fl\_Window::default\_cursor (Fl\_Cursor *c*, Fl\_Color *fg* = FL\_BLACK, Fl\_Color *bg* = FL\_WHITE)**

Sets the default Window cursor as well as its color.

For back compatibility only.

References [cursor\(\)](#).

**30.103.3.7 void Fl\_Window::draw () [protected, virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl\\_Group](#).

Reimplemented in [Fl\\_Cairo\\_Window](#), [Fl\\_Gl\\_Window](#), and [Fl\\_Glut\\_Window](#).

References [Fl\\_Widget::box\(\)](#), [Fl::box\\_dh\(\)](#), [Fl::box\\_dw\(\)](#), [Fl::box\\_dx\(\)](#), [Fl::box\\_dy\(\)](#), [Fl::cairo\\_make\\_current\(\)](#), [Fl\\_Widget::clear\\_flag\(\)](#), [Fl\\_Widget::color\(\)](#), [Fl\\_Widget::COPIED\\_LABEL](#), [fl\\_color\(\)](#), [fl\\_line\(\)](#), [Fl\\_Widget::flags\(\)](#), [Fl\\_Widget::h\(\)](#), [label\(\)](#), [Fl\\_Widget::parent\(\)](#), [Fl\\_Group::resizable\(\)](#), [Fl\\_Widget::set\\_flag\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl\\_Widget::x\(\)](#), and [Fl\\_Widget::y\(\)](#).

Referenced by [Fl\\_Cairo\\_Window::draw\(\)](#), [Fl\\_Menu\\_Window::flush\(\)](#), [Fl\\_Double\\_Window::flush\(\)](#), and [flush\(\)](#).

**30.103.3.8 void Fl\_Window::flush () [protected, virtual]**

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

Reimplemented in [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Menu\\_Window](#), [Fl\\_Overlay\\_Window](#), and [Fl\\_Single\\_Window](#).

References [draw\(\)](#), [fl\\_clip\\_region\(\)](#), and [make\\_current\(\)](#).

**30.103.3.9 void Fl\_Window::fullscreen ()**

Makes the window completely fill the screen, without any window manager border visible.

You must use [fullscreen\\_off\(\)](#) to undo this. This may not work with all window managers.

References [border\(\)](#), [Fl::h\(\)](#), [Fl\\_Widget::h\(\)](#), [resize\(\)](#), [Fl::screen\\_xywh\(\)](#), [Fl::w\(\)](#), [Fl\\_Widget::w\(\)](#), [Fl::x\(\)](#), [Fl\\_Widget::x\(\)](#), [Fl::y\(\)](#), and [Fl\\_Widget::y\(\)](#).

**30.103.3.10 int Fl\_Window::handle (int *event*) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

**Parameters:**

← *event* the kind of event received

**Return values:**

0 if the event was not used or understood

*I* if the event was used and can be deleted

**See also:**

[Fl\\_Event](#)

Reimplemented from [Fl\\_Group](#).

Reimplemented in [Fl\\_Glut\\_Window](#).

References `FL_HIDE`, `FL_SHOW`, `FL_WINDOW`, `Fl_Widget::parent()`, `show()`, `shown()`, `Fl_Widget::type()`, and `Fl_Widget::visible()`.

Referenced by `hide()`.

### **30.103.3.11 void Fl\_Window::hide () [virtual]**

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Menu\\_Window](#), and [Fl\\_Overlay\\_Window](#).

References `Fl::cairo_autolink_context()`, `Fl::cairo_make_current()`, `Fl_Widget::clear_visible()`, `cursor()`, `Fl::first_window()`, `FL_HIDE`, `handle()`, `hide()`, `modal()`, `Fl::next_window()`, `non_modal()`, `Fl_Widget::parent()`, `Fl_Widget::set_visible()`, `show()`, `shown()`, and `Fl_Widget::window()`.

Referenced by `Fl::default_atclose()`, `hide()`, and `~Fl_Window()`.

### **30.103.3.12 void Fl\_Window::hotspot (int x, int y, int offscreen = 0)**

Position the window so that the mouse is pointing at the given position, or at the center of the given widget, which may be the window itself.

If the optional offscreen parameter is non-zero, then the window is allowed to extend off the screen (this does not work with some X window managers).

**See also:**

[position\(\)](#)

References `border()`, `Fl::get_mouse()`, `Fl_Widget::h()`, `Fl_Widget::position()`, `Fl::screen_xywh()`, `Fl_Widget::w()`, and `Fl_Widget::x()`.

Referenced by `Fl_Color_Chooser::fl_color_chooser()`, `Fl_File_Chooser::Fl_File_Chooser()`, `hotspot()`, and `Fl_File_Chooser::show()`.

### **30.103.3.13 void Fl\_Window::iconize ()**

Iconifies the window.

If you call this when `shown()` is false it will `show()` it as an icon. If the window is already iconified this does nothing.

Call `show()` to restore the window.

When a window is iconified/restored (either by these calls or by the user) the `handle()` method is called with `FL_HIDE` and `FL_SHOW` events and `visible()` is turned on and off.

There is no way to control what is drawn in the icon except with the string passed to [Fl\\_Window::xclass\(\)](#). You should not rely on window managers displaying the icons.

References [show\(\)](#), and [shown\(\)](#).

#### **30.103.3.14 void Fl\_Window::iconlabel (const char \* *iname*)**

Sets the icon label.

References [Fl\\_Widget::flags\(\)](#), [label\(\)](#), and [Fl\\_Widget::set\\_flag\(\)](#).

#### **30.103.3.15 void Fl\_Window::label (const char \* *label*, const char \* *iconlabel*)**

Gets or sets the icon label.

#### **30.103.3.16 void Fl\_Window::label (const char \* *name*)**

Sets the window title bar label.

Reimplemented from [Fl\\_Widget](#).

References [iconlabel\(\)](#), and [label\(\)](#).

#### **30.103.3.17 void Fl\_Window::make\_current ()**

Sets things up so that the drawing functions in <[FL/fl\\_draw.H](#)> will go into this window.

This is useful for incremental update of windows, such as in an idle callback, which will make your program behave much better if it draws a slow graphic. **Danger: incremental update is very hard to debug and maintain!**

This method only works for the [Fl\\_Window](#) and [Fl\\_Gl\\_Window](#) derived classes.

Reimplemented in [Fl\\_Gl\\_Window](#), [Fl\\_Single\\_Window](#), and [Fl\\_Glut\\_Window](#).

Referenced by [Fl\\_Double\\_Window::flush\(\)](#), and [flush\(\)](#).

#### **30.103.3.18 int Fl\_Window::modal () const [inline]**

Returns true if this window is modal.

References [Fl\\_Widget::flags\(\)](#).

Referenced by [hide\(\)](#).

#### **30.103.3.19 int Fl\_Window::non\_modal () const [inline]**

Returns true if this window is modal or non-modal.

References [Fl\\_Widget::flags\(\)](#).

Referenced by [hide\(\)](#).

**30.103.3.20 int Fl\_Window::override () const [inline]**

Returns non zero if FL\_OVERRIDE flag is set, 0 otherwise.

References Fl\_Widget::flags().

**30.103.3.21 virtual void Fl\_Window::resize (int, int, int, int) [virtual]**

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl\\_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl\\_Widget](#) methods [size\(x,y\)](#) and [position\(w,h\)](#), which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl\\_Group](#).

Reimplemented in [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), and [Fl\\_Overlay\\_Window](#).

Referenced by [fullscreen\(\)](#), [fullscreen\\_off\(\)](#), [Fl\\_Overlay\\_Window::resize\(\)](#), and [show\(\)](#).

**30.103.3.22 void Fl\_Window::set\_modal () [inline]**

A "modal" window, when [shown\(\)](#), will prevent any events from being delivered to other windows in the same program, and will also remain on top of the other windows (if the X window manager supports the "transient for" property).

Several modal windows may be shown at once, in which case only the last one shown gets events. You can See which window (if any) is modal by calling [Fl::modal\(\)](#).

References [Fl\\_Widget::set\\_flag\(\)](#).

Referenced by [Fl\\_Color\\_Chooser::fl\\_color\\_chooser\(\)](#), and [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#).

**30.103.3.23 void Fl\_Window::set\_non\_modal () [inline]**

A "non-modal" window (terminology borrowed from Microsoft Windows) acts like a [modal\(\)](#) one in that it remains on top, but it has no effect on event delivery.

There are *three* states for a window: modal, non-modal, and normal.

References [Fl\\_Widget::set\\_flag\(\)](#).

**30.103.3.24 virtual void Fl\_Window::show () [virtual]**

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#)

serves the purpose of raise() in other toolkits.

Reimplemented from [Fl\\_Widget](#).

Reimplemented in [Fl\\_Double\\_Window](#), [Fl\\_Gl\\_Window](#), [Fl\\_Menu\\_Window](#), [Fl\\_Overlay\\_Window](#), and [Fl\\_Single\\_Window](#).

Referenced by [Fl\\_Color\\_Chooser::fl\\_color\\_chooser\(\)](#), [handle\(\)](#), [Fl::handle\(\)](#), [hide\(\)](#), [iconize\(\)](#), [Fl\\_Single\\_Window::show\(\)](#), [Fl\\_Overlay\\_Window::show\(\)](#), [Fl\\_Gl\\_Window::show\(\)](#), [Fl\\_Double\\_Window::show\(\)](#), and [show\(\)](#).

### **30.103.3.25 int Fl\_Window::shown () [inline]**

Returns non-zero if [show\(\)](#) has been called (but not [hide\(\)](#)).

You can tell if a window is iconified with (`w->shown() &!w->visible()`).

Referenced by [border\(\)](#), [cursor\(\)](#), [Fl\\_Menu\\_Window::erase\(\)](#), [Fl::first\\_window\(\)](#), [Fl\\_Color\\_Chooser::fl\\_color\\_chooser\(\)](#), [Fl\\_Overlay\\_Window::flush\(\)](#), [handle\(\)](#), [hide\(\)](#), [iconize\(\)](#), [Fl\\_Glut\\_Window::make\\_current\(\)](#), [Fl\\_Gl\\_Window::redraw\\_overlay\(\)](#), [Fl\\_Menu\\_Window::show\(\)](#), [Fl\\_Gl\\_Window::show\(\)](#), and [Fl\\_File\\_Chooser::shown\(\)](#).

### **30.103.3.26 void Fl\_Window::size\_range (int *a*, int *b*, int *c* = 0, int *d* = 0, int *e* = 0, int *f* = 0, int *g* = 0) [inline]**

Set the allowable range the user can resize this window to.

This only works for top-level windows.

- minw and minh are the smallest the window can be. Either value must be greater than 0.
- maxw and maxh are the largest the window can be. If either is *equal* to the minimum then you cannot resize in that direction. If either is zero then FLTK picks a maximum size in that direction such that the window will fill the screen.
- dw and dh are size increments. The window will be constrained to widths of minw + N \* dw, where N is any non-negative integer. If these are less or equal to 1 they are ignored. (this is ignored on WIN32)
- aspect is a flag that indicates that the window should preserve it's aspect ratio. This only works if both the maximum and minimum have the same aspect ratio. (ignored on WIN32 and by many X window managers)

If this function is not called, FLTK tries to figure out the range from the setting of [resizable\(\)](#):

- If [resizable\(\)](#) is NULL (this is the default) then the window cannot be resized and the resize border and max-size control will not be displayed for the window.
- If either dimension of [resizable\(\)](#) is less than 100, then that is considered the minimum size. Otherwise the [resizable\(\)](#) has a minimum size of 100.
- If either dimension of [resizable\(\)](#) is zero, then that is also the maximum size (so the window cannot resize in that direction).

It is undefined what happens if the current size does not fit in the constraints passed to [size\\_range\(\)](#).

Referenced by [Fl\\_File\\_Chooser::Fl\\_File\\_Chooser\(\)](#), and [Fl\\_Help\\_Dialog::Fl\\_Help\\_Dialog\(\)](#).

**30.103.3.27 void Fl\_Window::xclass (const char \* c) [inline]**

A string used to tell the system what type of window this is.

Mostly this identifies the picture to draw in the icon. *Under X, this is turned into a XA\_WM\_CLASS pair by truncating at the first non-alphanumeric character and capitalizing the first character, and the second one if the first is 'x'. Thus "foo" turns into "foo, Foo", and "xprog.1" turns into "xprog, XProg".* This only works if called *before* calling [show\(\)](#).

Under Microsoft Windows this string is used as the name of the WNDCLASS structure, though it is not clear if this can have any visible effect. The passed pointer is stored unchanged. The string is not copied.

## 30.103.4 Member Data Documentation

### 30.103.4.1 Fl\_Window\* Fl\_Window::current\_ [static, protected]

Stores the last window that was made current.

See [current\(\)](#) const

Reimplemented from [Fl\\_Group](#).

Referenced by [current\(\)](#), [Fl\\_Menu\\_Window::flush\(\)](#), and [Fl\\_Gl\\_Window::make\\_current\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_Window.H](#)
- Fl.cxx
- Fl\_arg.cxx
- fl\_cursor.cxx
- Fl\_Window.cxx
- Fl\_Window\_fullscreen.cxx
- Fl\_Window\_hotspot.cxx
- Fl\_Window\_iconize.cxx

## 30.104 Fl\_Wizard Class Reference

This widget is based off the [Fl\\_Tabs](#) widget, but instead of displaying tabs it only changes "tabs" under program control.

```
#include <Fl_Wizard.h>
```

Inheritance diagram for Fl\_Wizard::



### Public Member Functions

- [Fl\\_Wizard](#) (int, int, int, int, const char \*=0)

*The constructor creates the [Fl\\_Wizard](#) widget at the specified position and size.*

- void [next](#) ()

*This method shows the next child of the wizard.*

- void [prev](#) ()

*Shows the previous child.*

- [Fl\\_Widget](#) \* [value](#) ()

*Gets the current visible child widget.*

- void [value](#) ([Fl\\_Widget](#) \*)

*Sets the child widget that is visible.*

### 30.104.1 Detailed Description

This widget is based off the [Fl\\_Tabs](#) widget, but instead of displaying tabs it only changes "tabs" under program control.

Its primary purpose is to support "wizards" that step a user through configuration or troubleshooting tasks.

As with [Fl\\_Tabs](#), wizard panes are composed of child (usually [Fl\\_Group](#)) widgets. Navigation buttons must be added separately.

### 30.104.2 Constructor & Destructor Documentation

#### 30.104.2.1 Fl\_Wizard::Fl\_Wizard (int *xx*, int *yy*, int *ww*, int *hh*, const char \* *l* = 0)

The constructor creates the [Fl\\_Wizard](#) widget at the specified position and size.

The inherited destructor destroys the widget and its children.

References `Fl_Widget::box()`, and `FL_THIN_UP_BOX`.

### 30.104.3 Member Function Documentation

#### 30.104.3.1 void Fl\_Wizard::next ()

This method shows the next child of the wizard.

If the last child is already visible, this function does nothing.

References `Fl_Group::array()`, `Fl_Group::children()`, and `value()`.

#### 30.104.3.2 void Fl\_Wizard::prev ()

Shows the previous child.

References `Fl_Group::array()`, `Fl_Group::children()`, and `value()`.

#### 30.104.3.3 void Fl\_Wizard::value (Fl\_Widget \* *kid*)

Sets the child widget that is visible.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Window::cursor()`, `Fl_Widget::show()`, `Fl_Widget::visible()`, and `Fl_Widget::window()`.

#### 30.104.3.4 Fl\_Widget \* Fl\_Wizard::value ()

Gets the current visible child widget.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::hide()`, and `Fl_Widget::show()`.

Referenced by `next()`, and `prev()`.

The documentation for this class was generated from the following files:


- [Fl\\_Wizard.H](#)
- `Fl_Wizard.cxx`

## 30.105 Fl\_XBM\_Image Class Reference

The [Fl\\_XBM\\_Image](#) class supports loading, caching, and drawing of X Bitmap (XBM) bitmap files.

```
#include <Fl_XBM_Image.h>
```

Inheritance diagram for Fl\_XBM\_Image:::



### Public Member Functions

- [Fl\\_XBM\\_Image](#) (const char \*filename)

*The constructor loads the named XBM file from the given name filename.*

### 30.105.1 Detailed Description

The [Fl\\_XBM\\_Image](#) class supports loading, caching, and drawing of X Bitmap (XBM) bitmap files.

### 30.105.2 Constructor & Destructor Documentation

#### 30.105.2.1 Fl\_XBM\_Image::Fl\_XBM\_Image (const char \* *name*)

The constructor loads the named XBM file from the given name filename.

The destructor free all memory and server resources that are used by the image.

References [Fl\\_Bitmap::array](#), [Fl\\_Image::h\(\)](#), and [Fl\\_Image::w\(\)](#).

The documentation for this class was generated from the following files:


- [Fl\\_XBM\\_Image.H](#)
- [Fl\\_XBM\\_Image.cxx](#)

## 30.106 Fl\_XPM\_Image Class Reference

The [Fl\\_XPM\\_Image](#) class supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency.

```
#include <Fl_XPM_Image.h>
```

Inheritance diagram for Fl\_XPM\_Image::



### Public Member Functions

- [Fl\\_XPM\\_Image](#) (const char \*filename)

*The constructor loads the XPM image from the name filename.*

### 30.106.1 Detailed Description

The [Fl\\_XPM\\_Image](#) class supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency.

### 30.106.2 Constructor & Destructor Documentation

#### 30.106.2.1 [Fl\\_XPM\\_Image::Fl\\_XPM\\_Image \(const char \\* name\)](#)

The constructor loads the XPM image from the name filename.

The destructor free all memory and server resources that are used by the image.

References [Fl\\_Image::data\(\)](#).

The documentation for this class was generated from the following files:

- [Fl\\_XPM\\_Image.H](#)
- [Fl\\_XPM\\_Image.cxx](#)

# Chapter 31

## File Documentation

### 31.1 Enumerations.H File Reference

This file contains type definitions and general enumerations.

```
#include "Fl_Export.h"  
#include "fl_types.h"
```

#### Defines

##### Version Numbers

*FLTK defines some constants to help the programmer to find out, for which FLTK version a program is compiled.*

*The following constants are defined:*

- #define **FL\_MAJOR\_VERSION** 1  
*The major release version of this FLTK library.*
- #define **FL\_MINOR\_VERSION** 3  
*The minor release version for this library.*
- #define **FL\_PATCH\_VERSION** 0  
*The patch version for this library.*
- #define **FL\_VERSION**  
*The FLTK version number as a double.*

##### Mouse and Keyboard Events

*This and the following constants define the non-ASCII keys on the keyboard for **FL\_KEYBOARD** and **FL\_SHORTCUT** events.*

##### ***Todo***

***FL\_Button** and **FL\_key...** constants could be structured better (use an enum or some doxygen grouping ?)*

*See also:*

[Fl::event\\_key\(\)](#) and [Fl::get\\_key\(int\)](#) (use ascii letters for all other keys):

- #define **FL\_Button** 0xfee8  
*A mouse button; use **FL\_Button** + n for mouse button n.*
- #define **FL\_Backspace** 0xff08  
*The backspace key.*
- #define **FL\_Tab** 0xff09  
*The tab key.*
- #define **FL\_Enter** 0xff0d  
*The enter key.*
- #define **FL\_Pause** 0xff13  
*The pause key.*
- #define **FL\_Scroll\_Lock** 0xff14  
*The scroll lock key.*
- #define **FL\_Escape** 0xff1b  
*The escape key.*
- #define **FL\_Home** 0xff50  
*The home key.*
- #define **FL\_Left** 0xff51  
*The left arrow key.*
- #define **FL\_Up** 0xff52  
*The up arrow key.*
- #define **FL\_Right** 0xff53  
*The right arrow key.*
- #define **FL\_Down** 0xff54  
*The down arrow key.*
- #define **FL\_Page\_Up** 0xff55  
*The page-up key.*
- #define **FL\_Page\_Down** 0xff56  
*The page-down key.*
- #define **FL\_End** 0xff57  
*The end key.*
- #define **FL\_Print** 0xff61  
*The print (or print-screen) key.*
- #define **FL\_Insert** 0xff63  
*The insert key.*

- #define **FL\_Menu** 0xff67  
*The menu key.*
- #define **FL\_Help** 0xff68  
*The 'help' key on Mac keyboards.*
- #define **FL\_Num\_Lock** 0xff7f  
*The num lock key.*
- #define **FL\_KP** 0xff80  
*One of the keypad numbers; use **FL\_KP** + *n* for number *n*.*
- #define **FL\_KP\_Enter** 0xff8d  
*The enter key on the keypad, same as **Fl\_KP**+'\r'.*
- #define **FL\_KP\_Last** 0xffbd  
*The last keypad key; use to range-check keypad.*
- #define **FL\_F** 0xffbd  
*One of the function keys; use **FL\_F** + *n* for function key *n*.*
- #define **FL\_F\_Last** 0xffe0  
*The last function key; use to range-check function keys.*
- #define **FL\_Shift\_L** 0xffe1  
*The lefthand shift key.*
- #define **FL\_Shift\_R** 0xffe2  
*The righthand shift key.*
- #define **FL\_Control\_L** 0xffe3  
*The lefthand control key.*
- #define **FL\_Control\_R** 0xffe4  
*The righthand control key.*
- #define **FL\_Caps\_Lock** 0xffe5  
*The caps lock key.*
- #define **FL\_Meta\_L** 0xffe7  
*The left meta/Windows key.*
- #define **FL\_Meta\_R** 0xffe8  
*The right meta/Windows key.*
- #define **FL\_Alt\_L** 0xffe9  
*The left alt key.*
- #define **FL\_Alt\_R** 0xffea  
*The right alt key.*
- #define **FL\_Delete** 0xffff

*The delete key.*

## Mouse Buttons

*These constants define the button numbers for `FL_PUSH` and `FL_RELEASE` events.*

*See also:*

[`Fl::event\_button\(\)`](#)

- `#define FL_LEFT_MOUSE 1`  
*The left mouse button.*
- `#define FL_MIDDLE_MOUSE 2`  
*The middle mouse button.*
- `#define FL_RIGHT_MOUSE 3`  
*The right mouse button.*

## Event States

*The following constants define bits in the `Fl::event_state()` value.*

- `#define FL_SHIFT 0x00010000`  
*One of the shift keys is down.*
- `#define FL_CAPS_LOCK 0x00020000`  
*The caps lock is on.*
- `#define FL_CTRL 0x00040000`  
*One of the ctrl keys is down.*
- `#define FL_ALT 0x00080000`  
*One of the alt keys is down.*
- `#define FL_NUM_LOCK 0x00100000`  
*The num lock is on.*
- `#define FL_META 0x00400000`  
*One of the meta/Windows keys is down.*
- `#define FL_SCROLL_LOCK 0x00800000`  
*The scroll lock is on.*
- `#define FL_BUTTON1 0x01000000`  
*Mouse button 1 is pushed.*
- `#define FL_BUTTON2 0x02000000`  
*Mouse button 2 is pushed.*
- `#define FL_BUTTON3 0x04000000`  
*Mouse button 3 is pushed.*
- `#define FL_BUTTONS 0x7f000000`

*Any mouse button is pushed.*

- #define **FL\_BUTTON**(n) (0x00800000<<(n))  
*Mouse button n (n > 0) is pushed.*
- #define **FL\_COMMAND** FL\_CTRL  
*An alias for FL\_CTRL on WIN32 and X11, or FL\_META on MacOS X.*

## Typedefs

- typedef int **FL\_Fontsize**  
*Size of a font in pixels.*

## Enumerations

- enum **Fl\_Event** {

```
FL_NO_EVENT = 0, FL_PUSH = 1, FL_RELEASE = 2, FL_ENTER = 3,
FL_LEAVE = 4, FL_DRAG = 5, FL_FOCUS = 6, FL_UNFOCUS = 7,
FL_KEYDOWN = 8, FL_KEYBOARD = 8, FL_KEYUP = 9, FL_CLOSE = 10,
FL_MOVE = 11, FL_SHORTCUT = 12, FL_DEACTIVATE = 13, FL_ACTIVATE = 14,
FL_HIDE = 15, FL_SHOW = 16, FL_PASTE = 17, FL_SELECTIONCLEAR = 18,
FL_MOUSEWHEEL = 19, FL_DND_ENTER = 20, FL_DND_DRAG = 21, FL_DND_LEAVE = 22,
FL_DND_RELEASE = 23 }
```

*Every time a user moves the mouse pointer, clicks a button, or presses a key, an event is generated and sent to your application.*

- enum **Fl\_Labeltype** {

```
FL_NORMAL_LABEL = 0, FL_NO_LABEL, _FL_SHADOW_LABEL, _FL_ENGRAVED_LABEL,
_FL_EMBOSSSED_LABEL, _FL_MULTI_LABEL, _FL_ICON_LABEL, _FL_IMAGE_LABEL,
FL_FREE_LABELTYPE }
```

*The labeltype() method sets the type of the label.*

## When Conditions

- enum **Fl\_When** {

```
FL_WHEN_NEVER = 0, FL_WHEN_CHANGED = 1, FL_WHEN_NOT_CHANGED = 2, FL_WHEN_RELEASE = 4,
FL_WHEN_RELEASE_ALWAYS = 6, FL_WHEN_ENTER_KEY = 8, FL_WHEN_ENTER_KEY_ALWAYS = 10, FL_WHEN_ENTER_KEY_CHANGED = 11 }
```

*These constants determine when a callback is performed.*

## Variables

- `FL_EXPORT Fl_Fontsize FL_NORMAL_SIZE`  
*normal font size*

### 31.1.1 Detailed Description

This file contains type definitions and general enumerations.

### 31.1.2 Define Documentation

#### 31.1.2.1 `#define FL_MAJOR_VERSION 1`

The major release version of this FLTK library.

**See also:**

[FL\\_VERSION](#)

#### 31.1.2.2 `#define FL_MINOR_VERSION 3`

The minor release version for this library.

FLTK remains mostly source-code compatible between minor version changes.

#### 31.1.2.3 `#define FL_PATCH_VERSION 0`

The patch version for this library.

FLTK remains binary compatible between patches.

#### 31.1.2.4 `#define FL_VERSION`

**Value:**

```
((double) FL_MAJOR_VERSION + \
    (double)FL_MINOR_VERSION * 0.01 + \
    (double)FL_PATCH_VERSION * 0.0001)
```

The FLTK version number as a *double*.

This is changed slightly from the beta versions because the old "const double" definition would not allow for conditional compilation...

`FL_VERSION` is a double that describes the major and minor version numbers. Version 1.1 is actually stored as 1.01 to allow for more than 9 minor releases.

The `FL_MAJOR_VERSION`, `FL_MINOR_VERSION`, and `FL_PATCH_VERSION` constants give the integral values for the major, minor, and patch releases respectively.

Referenced by `Fl::version()`.

### 31.1.3 Typedef Documentation

#### 31.1.3.1 `typedef unsigned Fl_Align`

Flags to control the label alignment.

This controls how the label is displayed next to or inside the widget. The default value is `FL_ALIGN_CENTER` for most widgets, which centers the label inside the widget.

Flags can be or'd to achieve a combination of alignments.

See also:

[FL\\_ALIGN\\_CENTER](#), etc.

#### 31.1.3.2 `typedef int Fl_Font`

A font number is an index into the internal font table.

The following constants define the standard FLTK fonts:

#### 31.1.3.3 `typedef int Fl_Fontsize`

Size of a font in pixels.

This is the approximate height of a font in pixels.

### 31.1.4 Enumeration Type Documentation

#### 31.1.4.1 `enum Fl_Boxtype`

Enumerator:

`FL_NO_BOX` nothing is drawn at all, this box is invisible

`FL_FLAT_BOX` a flat box

`FL_UP_BOX` see figure 1

`FL_DOWN_BOX` see figure 1

`FL_UP_FRAME` see figure 1

`FL_DOWN_FRAME` see figure 1

`FL_THIN_UP_BOX` see figure 1

`FL_THIN_DOWN_BOX` see figure 1

`FL_THIN_UP_FRAME` see figure 1

`FL_THIN_DOWN_FRAME` see figure 1

`FL_ENGRAVED_BOX` see figure 1

`FL_EMBOSS_BOX` see figure 1

`FL_ENGRAVED_FRAME` see figure 1

`FL_EMBOSS_FRAME` see figure 1

`FL_BORDER_BOX` see figure 1

`FL_SHADOW_BOX` see figure 1

*FL\_BORDER\_FRAME* see figure 1  
*FL\_SHADOW\_FRAME* see figure 1  
*FL\_ROUNDED\_BOX* see figure 1  
*FL\_RSHADOW\_BOX* see figure 1  
*FL\_ROUNDED\_FRAME* see figure 1  
*FL\_RFLAT\_BOX* see figure 1  
*FL\_ROUND\_UP\_BOX* see figure 1  
*FL\_ROUND\_DOWN\_BOX* see figure 1  
*FL\_DIAMOND\_UP\_BOX* see figure 1  
*FL\_DIAMOND\_DOWN\_BOX* see figure 1  
*FL\_OVAL\_BOX* see figure 1  
*FL\_OSHADOW\_BOX* see figure 1  
*FL\_OVAL\_FRAME* see figure 1  
*FL\_OFLAT\_BOX* see figure 1  
*FL\_PLASTIC\_UP\_BOX* plastic version of FL\_UP\_BOX  
*FL\_PLASTIC\_DOWN\_BOX* plastic version of FL\_DOWN\_BOX  
*FL\_PLASTIC\_UP\_FRAME* plastic version of FL\_UP\_FRAME  
*FL\_PLASTIC\_DOWN\_FRAME* plastic version of FL\_DOWN\_FRAME  
*FL\_PLASTIC\_THIN\_UP\_BOX* plastic version of FL\_THIN\_UP\_BOX  
*FL\_PLASTIC\_THIN\_DOWN\_BOX* plastic version of FL\_THIN\_DOWN\_BOX  
*FL\_PLASTIC\_ROUND\_UP\_BOX* plastic version of FL\_ROUND\_UP\_BOX  
*FL\_PLASTIC\_ROUND\_DOWN\_BOX* plastic version of FL\_ROUND\_DOWN\_BOX  
*FL\_GTK\_UP\_BOX* gtk+ version of FL\_UP\_BOX  
*FL\_GTK\_DOWN\_BOX* gtk+ version of FL\_DOWN\_BOX  
*FL\_GTK\_UP\_FRAME* gtk+ version of FL\_UP\_FRAME  
*FL\_GTK\_DOWN\_FRAME* gtk+ version of FL\_DOWN\_FRAME  
*FL\_GTK\_THIN\_UP\_BOX* gtk+ version of FL\_THIN\_UP\_BOX  
*FL\_GTK\_THIN\_DOWN\_BOX* gtk+ version of FL\_THIN\_DOWN\_BOX  
*FL\_GTK\_THIN\_UP\_FRAME* gtk+ version of FL\_UP\_FRAME  
*FL\_GTK\_THIN\_DOWN\_FRAME* gtk+ version of FL\_THIN\_DOWN\_FRAME  
*FL\_GTK\_ROUND\_UP\_BOX* gtk+ version of FL\_ROUND\_UP\_BOX  
*FL\_GTK\_ROUND\_DOWN\_BOX* gtk+ version of FL\_ROUND\_DOWN\_BOX  
*FL\_FREE\_BOXTYPE* the first free box type for creation of new box types

### 31.1.4.2 enum *Fl\_Color*

The *Fl\_Color* enumeration type holds a FLTK color value.

Colors are either 8-bit indexes into a virtual colormap or 24-bit RGB color values.

Color indices occupy the lower 8 bits of the value, while RGB colors occupy the upper 24 bits, for a byte organization of RGBI.

**Todo**

enum Fl\_Color needs some more comments for values, see Fl/Enumerations.H

**Enumerator:**

***FL\_FOREGROUND\_COLOR*** the default foreground color (0) used for labels and text

***FL\_BACKGROUND2\_COLOR*** the default background color for text, list, and valuator widgets

***FL\_INACTIVE\_COLOR*** the inactive foreground color

***FL\_SELECTION\_COLOR*** the default selection/highlight color

### 31.1.4.3 enum Fl\_Event

Every time a user moves the mouse pointer, clicks a button, or presses a key, an event is generated and sent to your application.

Events can also come from other programs like the window manager.

Events are identified by the integer argument passed to the [Fl\\_Widget::handle\(\)](#) virtual method. Other information about the most recent event is stored in static locations and acquired by calling the [Fl::event\\_-\\*\(\)](#) methods. This static information remains valid until the next event is read from the window system, so it is ok to look at it outside of the handle() method.

**See also:**

[Fl::event\\_text\(\)](#), [Fl::event\\_key\(\)](#), class [Fl::](#)

**Enumerator:**

***FL\_NO\_EVENT*** No event.

***FL\_PUSH*** A mouse button has gone down with the mouse pointing at this widget.

You can find out what button by calling [Fl::event\\_button\(\)](#). You find out the mouse position by calling [Fl::event\\_x\(\)](#) and [Fl::event\\_y\(\)](#).

A widget indicates that it "wants" the mouse click by returning non-zero from its [Fl\\_Widget::handle\(\)](#) method. It will then become the [Fl::pushed\(\)](#) widget and will get [FL\\_DRAG](#) and the matching [FL\\_RELEASE](#) events. If [Fl\\_Widget::handle\(\)](#) returns zero then FLTK will try sending the [FL\\_PUSH](#) to another widget.

***FL\_RELEASE*** A mouse button has been released.

You can find out what button by calling [Fl::event\\_button\(\)](#).

In order to receive the [FL\\_RELEASE](#) event, the widget must return non-zero when handling [FL\\_PUSH](#).

***FL\_ENTER*** The mouse has been moved to point at this widget.

This can be used for highlighting feedback. If a widget wants to highlight or otherwise track the mouse, it indicates this by returning non-zero from its handle() method. It then becomes the [Fl::belowmouse\(\)](#) widget and will receive [FL\\_MOVE](#) and [FL\\_LEAVE](#) events.

***FL\_LEAVE*** The mouse has moved out of the widget.

In order to receive the [FL\\_LEAVE](#) event, the widget must return non-zero when handling [FL\\_ENTER](#).

***FL\_DRAG*** The mouse has moved with a button held down.

The current button state is in [Fl::event\\_state\(\)](#). The mouse position is in [Fl::event\\_x\(\)](#) and [Fl::event\\_y\(\)](#).

In order to receive [FL\\_DRAG](#) events, the widget must return non-zero when handling [FL\\_PUSH](#).

**FL\_FOCUS** This indicates an *attempt* to give a widget the keyboard focus.

If a widget wants the focus, it should change itself to display the fact that it has the focus, and return non-zero from its handle() method. It then becomes the [Fl::focus\(\)](#) widget and gets FL\_KEYDOWN, FL\_KEYUP, and FL\_UNFOCUS events.

The focus will change either because the window manager changed which window gets the focus, or because the user tried to navigate using tab, arrows, or other keys. You can check [Fl::event\\_key\(\)](#) to figure out why it moved. For navigation it will be the key pressed and interaction with the window manager it will be zero.

**FL\_UNFOCUS** This event is sent to the previous [Fl::focus\(\)](#) widget when another widget gets the focus or the window loses focus.

**FL\_KEYDOWN** A key was pressed or released.

The key can be found in [Fl::event\\_key\(\)](#). The text that the key should insert can be found with [Fl::event\\_text\(\)](#) and its length is in [Fl::event\\_length\(\)](#). If you use the key handle() should return 1. If you return zero then FLTK assumes you ignored the key and will then attempt to send it to a parent widget. If none of them want it, it will change the event into a FL\_SHORTCUT event. To receive FL\_KEYBOARD events you must also respond to the FL\_FOCUS and FL\_UNFOCUS events.

If you are writing a text-editing widget you may also want to call the [Fl::compose\(\)](#) function to translate individual keystrokes into foreign characters.

FL\_KEYUP events are sent to the widget that currently has focus. This is not necessarily the same widget that received the corresponding FL\_KEYDOWN event because focus may have changed between events.

**FL\_KEYBOARD** Equivalent to FL\_KEYDOWN.

See also:

[FL\\_KEYDOWN](#)

**FL\_KEYUP** Key release event.

See also:

[FL\\_KEYDOWN](#)

**FL\_CLOSE** The user clicked the close button of a window.

This event is used internally only to trigger the callback of [Fl\\_Window](#) derived classed. The default callback closes the window calling [Fl\\_Window::hide\(\)](#).

**FL\_MOVE** The mouse has moved without any mouse buttons held down.

This event is sent to the [Fl::belowmouse\(\)](#) widget.

In order to receive FL\_MOVE events, the widget must return non-zero when handling FL\_ENTER.

**FL\_SHORTCUT** If the [Fl::focus\(\)](#) widget is zero or ignores an FL\_KEYBOARD event then FLTK tries sending this event to every widget it can, until one of them returns non-zero.

FL\_SHORTCUT is first sent to the [Fl::belowmouse\(\)](#) widget, then its parents and siblings, and eventually to every widget in the window, trying to find an object that returns non-zero. FLTK tries really hard to not to ignore any keystrokes!

You can also make "global" shortcuts by using [Fl::add\\_handler\(\)](#). A global shortcut will work no matter what windows are displayed or which one has the focus.

**FL\_DEACTIVATE** This widget is no longer active, due to [Fl\\_Widget::deactivate\(\)](#) being called on it or one of its parents.

[Fl\\_Widget::active\(\)](#) may still be true after this, the widget is only active if [Fl\\_Widget::active\(\)](#) is true on it and all its parents (use [Fl\\_Widget::active\\_r\(\)](#) to check this).

**FL\_ACTIVATE** This widget is now active, due to [Fl\\_Widget::activate\(\)](#) being called on it or one of its parents.

**FL\_HIDE** This widget is no longer visible, due to [Fl\\_Widget::hide\(\)](#) being called on it or one of its parents, or due to a parent window being minimized.

[Fl\\_Widget::visible\(\)](#) may still be true after this, but the widget is visible only if [visible\(\)](#) is true for it and all its parents (use [Fl\\_Widget::visible\\_r\(\)](#) to check this).

**FL\_SHOW** This widget is visible again, due to [Fl\\_Widget::show\(\)](#) being called on it or one of its parents, or due to a parent window being restored.

Child Fl\_Windows respond to this by actually creating the window if not done already, so if you subclass a window, be sure to pass FL\_SHOW to the base class [Fl\\_Widget::handle\(\)](#) method!

**FL\_PASTE** You should get this event some time after you call [Fl::paste\(\)](#).

The contents of [Fl::event\\_text\(\)](#) is the text to insert and the number of characters is in [Fl::event\\_length\(\)](#).

**FL\_SELECTIONCLEAR** The [Fl::selection\\_owner\(\)](#) will get this event before the selection is moved to another widget.

This indicates that some other widget or program has claimed the selection. Motif programs used this to clear the selection indication. Most modern programs ignore this.

**FL\_MOUSEWHEEL** The user has moved the mouse wheel.

The [Fl::event\\_dx\(\)](#) and [Fl::event\\_dy\(\)](#) methods can be used to find the amount to scroll horizontally and vertically.

**FL\_DND\_ENTER** The mouse has been moved to point at this widget.

A widget that is interested in receiving drag'n'drop data must return 1 to receive FL\_DND\_DRAG, FL\_DND\_LEAVE and FL\_DND\_RELEASE events.

**FL\_DND\_DRAG** The mouse has been moved inside a widget while dragging data.

A widget that is interested in receiving drag'n'drop data should indicate the possible drop position.

**FL\_DND\_LEAVE** The mouse has moved out of the widget.

**FL\_DND\_RELEASE** The user has released the mouse button dropping data into the widget.

If the widget returns 1, it will receive the data in the immediately following FL\_PASTE event.

#### 31.1.4.4 enum Fl\_Labeltype

The [labeltype\(\)](#) method sets the type of the label.

The following standard label types are included:

##### [Todo](#)

The doxygen comments are incomplete, and some labeltypes are starting with an underscore. Also, there are three external functions undocumented (yet):

- [fl\\_define\\_FL\\_SHADOW\\_LABEL\(\)](#)
- [fl\\_define\\_FL\\_ENGRAVED\\_LABEL\(\)](#)
- [fl\\_define\\_FL\\_EMBOSED\\_LABEL\(\)](#)

##### Enumerator:

**FL\_NORMAL\_LABEL** draws the text (0)

**FL\_NO\_LABEL** does nothing

**FL\_SHADOW\_LABEL** draws a drop shadow under the text

**FL\_ENGRAVED\_LABEL** draws edges as though the text is engraved

---

***\_FL\_EMBOSSED\_LABEL*** draws edges as thought the text is raised  
***\_FL\_MULTI\_LABEL*** ?  
***\_FL\_ICON\_LABEL*** draws the icon associated with the text  
***\_FL\_IMAGE\_LABEL*** ?  
***FL\_FREE\_LABELTYPE*** first free labeltype to use for creating own labeltypes

### 31.1.4.5 enum **Fl\_When**

These constants determine when a callback is performed.

See also:

[Fl\\_Widget::when\(\)](#);

#### Todo

doxygen comments for values are incomplete and maybe wrong or unclear

Enumerator:

***FL\_WHEN\_NEVER*** Never call the callback.  
***FL\_WHEN\_CHANGED*** Do the callback only when the widget value changes.  
***FL\_WHEN\_NOT\_CHANGED*** Do the callback whenever the user interacts with the widget.  
***FL\_WHEN\_RELEASE*** Do the callback when the button or key is released and the value changes.  
***FL\_WHEN\_RELEASE\_ALWAYS*** Do the callback when the button or key is released, even if the value doesn't change.  
***FL\_WHEN\_ENTER\_KEY*** Do the callback when the user presses the ENTER key and the value changes.  
***FL\_WHEN\_ENTER\_KEY\_ALWAYS*** Do the callback when the user presses the ENTER key, even if the value doesn't change.  
***FL\_WHEN\_ENTER\_KEY\_CHANGED*** ?

### 31.1.5 Variable Documentation

#### 31.1.5.1 const **Fl\_Align FL\_ALIGN\_BOTTOM = (Fl\_Align)2**

Align the label at the bottom of the widget.

Referenced by Fl\_Group::draw\_outside\_label(), Fl\_Browser\_::Fl\_Browser\_(), Fl\_Chart::Fl\_Chart(), Fl\_Clock\_Output::Fl\_Clock\_Output(), Fl\_Counter::Fl\_Counter(), Fl\_FormsBitmap::Fl\_FormsBitmap(), Fl\_FormsPixmap::Fl\_FormsPixmap(), Fl\_Positioner::Fl\_Positioner(), Fl\_Valuator::Fl\_Valuator(), Fl\_Widget::redraw\_label(), and Fl\_Text\_Display::resize().

#### 31.1.5.2 const **Fl\_Align FL\_ALIGN\_CENTER = (Fl\_Align)0**

Align the label horizontally in the middle.

Referenced by Fl\_Timer::draw(), Fl\_Counter::draw(), Fl\_Widget::Fl\_Widget(), Fl\_Browser::item\_draw(), and Fl::reload\_scheme().

**31.1.5.3 const Fl\_Align FL\_ALIGN\_CLIP = (Fl\_Align)64**

All parts of the label that are larger than the widget will not be drawn .

Referenced by Fl\_Value\_Slider::draw(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Browser::item\_draw(), Fl::reload\_scheme(), and Fl\_File\_Chooser::rescan\_keep\_filename().

**31.1.5.4 const Fl\_Align FL\_ALIGN\_IMAGE\_OVER\_TEXT = (Fl\_Align)0**

If the label contains an image, draw the text below the image.

**31.1.5.5 const Fl\_Align FL\_ALIGN\_INSIDE = (Fl\_Align)16**

Draw the label inside of the widget.

Referenced by Fl\_Widget::draw\_label(), Fl\_Group::draw\_outside\_label(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Light\_Button::Fl\_Light\_Button(), Fl\_Progress::Fl\_Progress(), Fl\_Widget::redraw\_label(), Fl::reload\_scheme(), and Fl\_File\_Chooser::rescan\_keep\_filename().

**31.1.5.6 const Fl\_Align FL\_ALIGN\_LEFT = (Fl\_Align)4**

Align the label at the left of the widget.

Inside labels appear left-justified starting at the left side of the widget, outside labels are right-justified and drawn to the left of the widget.

Referenced by Fl\_Browser\_::bbox(), Fl\_Value\_Output::draw(), Fl\_Scroll::draw(), Fl\_Menu\_Item::draw(), Fl\_Choice::draw(), Fl\_Browser\_::draw(), Fl\_Widget::draw\_label(), Fl\_Group::draw\_outside\_label(), Fl\_Choice::Fl\_Choice(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Input\_::Fl\_Input\_(), Fl\_Input\_Choice::Fl\_Input\_Choice(), Fl\_Light\_Button::Fl\_Light\_Button(), Fl\_Spinner::Fl\_Spinner(), Fl\_Timer::Fl\_Timer(), Fl\_Value\_Input::Fl\_Value\_Input(), Fl\_Value\_Output::Fl\_Value\_Output(), Fl\_Browser::item\_draw(), Fl\_Widget::redraw\_label(), Fl\_File\_Chooser::rescan\_keep\_filename(), Fl\_Text\_Display::resize(), Fl\_Scroll::resize(), Fl\_Browser\_::resize(), and Fl\_Browser\_::scrollbar\_left().

**31.1.5.7 const Fl\_Align FL\_ALIGN\_RIGHT = (Fl\_Align)8**

Align the label to the right of the widget.

Referenced by Fl\_Widget::draw\_label(), Fl\_Group::draw\_outside\_label(), Fl\_File\_Chooser::Fl\_File\_Chooser(), Fl\_Browser::item\_draw(), Fl\_Widget::redraw\_label(), Fl\_Text\_Display::resize(), and Fl\_Browser\_::scrollbar\_right().

**31.1.5.8 const Fl\_Align FL\_ALIGN\_TEXT\_OVER\_IMAGE = (Fl\_Align)32**

If the label contains an image, draw the text on top of the image.

**31.1.5.9 const Fl\_Align FL\_ALIGN\_TOP = (Fl\_Align)1**

Align the label at the top of the widget.

Inside labels appear below the top, outside labels are drawn on top of the widget.

Referenced by Fl\_Browser\_::bbox(), Fl\_Scroll::draw(), Fl\_Browser\_::draw(), Fl\_Group::draw\_outside\_label(), Fl\_Group::Fl\_Group(), Fl\_Widget::redraw\_label(), Fl\_File\_Chooser::rescan\_keep\_filename(), Fl\_Text\_Display::resize(), Fl\_Scroll::resize(), and Fl\_Browser\_::resize().

### 31.1.5.10 const Fl\_Align FL\_ALIGN\_WRAP = (Fl\_Align)128

Wrap text that does not fit the width of the widget.

## 31.2 Fl.H File Reference

Fl static class .

```
#include <FL/Fl_Cairo.H>
#include "fl_utf8.h"
#include "Enumerations.H"
```

### Classes

- class Fl

*The Fl is the FLTK global (static) containing state information and global methods for the current application.*

### Defines

- #define Fl\_Object Fl\_Widget  
*for back compatibility - use Fl\_Widget!*

### Typedefs

- typedef void( Fl\_Label\_Draw\_F )(const Fl\_Label \*, int, int, int, int, Fl\_Align)  
*signature of some label drawing functions passed as parameters*
- typedef void( Fl\_Label\_Measure\_F )(const Fl\_Label \*, int &, int &)  
*signature of some label measurement functions passed as parameters*
- typedef void( Fl\_Box\_Draw\_F )(int, int, int, int, Fl\_Color)  
*signature of some box drawing functions passed as parameters*
- typedef void(\* Fl\_Timeout\_Handler )(void \*)  
*signature of some timeout callback functions passed as parameters*
- typedef void(\* Fl\_Awake\_Handler )(void \*)  
*signature of some wakeup callback functions passed as parameters*

### 31.2.1 Detailed Description

Fl static class .

## 31.3 Fl\_Adjuster.H File Reference

[Fl\\_Adjuster](#) widget .

```
#include "Fl_Valuator.H"
```

### Classes

- class [Fl\\_Adjuster](#)

*The [Fl\\_Adjuster](#) widget was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range.*

### 31.3.1 Detailed Description

[Fl\\_Adjuster](#) widget .

## 31.4 fl\_arc.cxx File Reference

Utility functions for drawing arcs and circles.

```
#include <FL/fl_draw.H>
#include <FL/math.h>
```

### Functions

- void **fl\_arc** (double x, double y, double r, double start, double end)

*Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl\\_arc\(\)](#).*

### 31.4.1 Detailed Description

Utility functions for drawing arcs and circles.

### 31.4.2 Function Documentation

#### 31.4.2.1 void **fl\_arc** (double *x*, double *y*, double *r*, double *start*, double *end*)

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl\\_arc\(\)](#).

##### Parameters:

← *x,y,r* center and radius of circular arc  
← *start,end* angles of start and end of arc measured in degrees counter-clockwise from 3 o'clock. If *end* is less than *start* then it draws the ark in a clockwise direction.

References [fl\\_transform\\_dx\(\)](#), [fl\\_transform\\_dy\(\)](#), and [fl\\_vertex\(\)](#).

## 31.5 fl\_arci.cxx File Reference

Utility functions for drawing circles using integers.

```
#include <FL/fl_draw.H>
#include <FL/x.H>
#include <config.h>
```

### Functions

- void [fl\\_arc](#) (int x, int y, int w, int h, double a1, double a2)  
*Draw ellipse sections using integer coordinates.*
- void [fl\\_pie](#) (int x, int y, int w, int h, double a1, double a2)  
*Draw filled ellipse sections using integer coordinates.*

### 31.5.1 Detailed Description

Utility functions for drawing circles using integers.

### 31.5.2 Function Documentation

#### 31.5.2.1 void [fl\\_arc](#) (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw ellipse sections using integer coordinates.

These functions match the rather limited circle drawing code provided by X and WIN32. The advantage over using [fl\\_arc](#) with floating point coordinates is that they are faster because they often use the hardware, and they draw much nicer small circles, since the small sizes are often hard-coded bitmaps.

If a complete circle is drawn it will fit inside the passed bounding box. The two angles are measured in degrees counterclockwise from 3'o'clock and are the starting and ending angle of the arc, a2 must be greater or equal to a1.

[fl\\_arc\(\)](#) draws a series of lines to approximate the arc. Notice that the integer version of [fl\\_arc\(\)](#) has a different number of arguments than the double version [fl\\_arc\(double x, double y, double r, double start, double a\)](#)

#### Parameters:

- ← *x,y,w,h* bounding box of complete circle
- ← *a1,a2* start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by [Fl\\_Menu\\_Item::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), and [Fl\\_Dial::draw\(\)](#).

#### 31.5.2.2 void [fl\\_pie](#) (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw filled ellipse sections using integer coordinates.

Like fl\_arc, but [fl\\_pie\(\)](#) draws a filled-in pie slice. This slice may extend outside the line drawn by fl\_arc; to avoid this use w - 1 and h - 1.

**Parameters:**

- ← *x,y,w,h* bounding box of complete circle
- ← *a1,a2* start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by Fl\_Menu\_Item::draw(), Fl\_Light\_Button::draw(), and Fl\_Dial::draw().

## 31.6 Fl\_Bitmap.H File Reference

[Fl\\_Bitmap](#) widget .

```
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_Bitmap](#)

The [Fl\\_Bitmap](#) class supports caching and drawing of mono-color (bitmap) images.

### 31.6.1 Detailed Description

[Fl\\_Bitmap](#) widget .

## 31.7 Fl\_BMP\_Image.H File Reference

[Fl\\_BMP\\_Image](#) widget .

```
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_BMP\\_Image](#)

The [Fl\\_BMP\\_Image](#) class supports loading, caching, and drawing of Windows Bitmap (BMP) image files.

### 31.7.1 Detailed Description

[Fl\\_BMP\\_Image](#) widget .

## 31.8 Fl\_Box.H File Reference

[Fl\\_Box](#) widget .  
#include "Fl\_Widget.H"

### Classes

- class [Fl\\_Box](#)  
*This widget simply draws its box, and possibly it's label.*

### 31.8.1 Detailed Description

[Fl\\_Box](#) widget .

## 31.9 fl\_boxtype.cxx File Reference

drawing code for common box types.

```
#include <FL/F1.H>
#include <FL/F1_Widget.H>
#include <FL/fl_draw.H>
#include <config.h>
```

### Defines

- #define **D1** BORDER\_WIDTH
- #define **D2** (BORDER\_WIDTH+BORDER\_WIDTH)
- #define **fl\_border\_box** fl\_rectbound  
*allow consistent naming*

### Functions

- **uchar \* fl\_gray\_ramp ()**
- **void fl\_frame (const char \*s, int x, int y, int w, int h)**  
*Draws a series of line segments around the given box.*
- **void fl\_frame2 (const char \*s, int x, int y, int w, int h)**  
*Draws a series of line segments around the given box.*
- **void fl\_no\_box (int, int, int, int, Fl\_Color)**  
*Draws a box of type FL\_NO\_BOX.*
- **void fl\_thin\_down\_frame (int x, int y, int w, int h, Fl\_Color)**  
*Draws a frame of type FL\_THIN\_DOWN\_FRAME.*
- **void fl\_thin\_down\_box (int x, int y, int w, int h, Fl\_Color c)**  
*Draws a box of type FL\_THIN\_DOWN\_BOX.*
- **void fl\_thin\_up\_frame (int x, int y, int w, int h, Fl\_Color)**  
*Draws a frame of type FL\_THIN\_UP\_FRAME.*
- **void fl\_thin\_up\_box (int x, int y, int w, int h, Fl\_Color c)**  
*Draws a box of type FL\_THIN\_UP\_BOX.*
- **void fl\_up\_frame (int x, int y, int w, int h, Fl\_Color)**  
*Draws a frame of type FL\_UP\_FRAME.*
- **void fl\_up\_box (int x, int y, int w, int h, Fl\_Color c)**  
*Draws a box of type FL\_UP\_BOX.*
- **void fl\_down\_frame (int x, int y, int w, int h, Fl\_Color)**

*Draws a frame of type FL\_DOWN\_FRAME.*

- void `fl_down_box` (int x, int y, int w, int h, `Fl_Color` c)  
*Draws a box of type FL\_DOWN\_BOX.*
- void `fl_engraved_frame` (int x, int y, int w, int h, `Fl_Color`)  
*Draws a frame of type FL\_ENGRAVED\_FRAME.*
- void `fl_engraved_box` (int x, int y, int w, int h, `Fl_Color` c)  
*Draws a box of type FL\_ENGRAVED\_BOX.*
- void `fl_embossed_frame` (int x, int y, int w, int h, `Fl_Color` c)  
*Draws a frame of type FL\_EMBOSSSED\_FRAME.*
- void `fl_embossed_box` (int x, int y, int w, int h, `Fl_Color` c)  
*Draws a box of type FL\_EMBOSSSED\_BOX.*
- void `fl_rectbound` (int x, int y, int w, int h, `Fl_Color` bgcolor)  
*Draws a bounded rectangle with a given position, size and color; Equivalent to drawing a box of type FL\_BORDER\_BOX.*
- void `fl_border_frame` (int x, int y, int w, int h, `Fl_Color` c)  
*Draws a frame of type FL\_BORDER\_FRAME.*
- void `fl_internal_boxtype` (`Fl_Boxtype` t, `Fl_Box_Draw_F` \*f)  
*Set the drawing function for a given box type.*
- void `fl_draw_box` (`Fl_Boxtype` t, int x, int y, int w, int h, `Fl_Color` c)  
*Draw box using given type, position, size and color.*

### 31.9.1 Detailed Description

drawing code for common box types.

### 31.9.2 Function Documentation

#### 31.9.2.1 void `fl_draw_box` (`Fl_Boxtype` t, int x, int y, int w, int h, `Fl_Color` c)

Draw box using given type, position, size and color.

##### Parameters:

- ← *t* box type
- ← *x,y,w,h* position and size
- ← *c* color

Referenced by `Fl_Menu_Item::draw()`.

### 31.9.2.2 void fl\_frame (const char \**s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: top, left, bottom, right. The results of calling [fl\\_frame\(\)](#) with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and [fl\\_frame2\(\)](#) is the order of the line segments.

**Parameters:**

← *s* sets of 4 grayscale values in top, left, bottom, right order

← *x,y,w,h* position and size

References [fl\\_color\(\)](#), [fl\\_xyline\(\)](#), and [fl\\_yxline\(\)](#).

Referenced by [fl\\_down\\_frame\(\)](#), [fl\\_embossed\\_frame\(\)](#), [fl\\_engraved\\_frame\(\)](#), and [fl\\_up\\_frame\(\)](#).

### 31.9.2.3 void fl\_frame2 (const char \**s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: bottom, right, top, left. The results of calling [fl\\_frame2\(\)](#) with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and [fl\\_frame\(\)](#) is the order of the line segments.

**Parameters:**

← *s* sets of 4 grayscale values in bottom, right, top, left order

← *x,y,w,h* position and size

References [fl\\_color\(\)](#), [fl\\_xyline\(\)](#), and [fl\\_yxline\(\)](#).

Referenced by [fl\\_down\\_frame\(\)](#), [fl\\_thin\\_down\\_frame\(\)](#), [fl\\_thin\\_up\\_frame\(\)](#), and [fl\\_up\\_frame\(\)](#).

### 31.9.2.4 void fl\_internal\_boxtype (Fl\_Boxtype *t*, Fl\_Box\_Draw\_F \**f*)

Set the drawing function for a given box type.

**Parameters:**

← *t* box type

← *f* box drawing function

## 31.10 Fl\_Browser.H File Reference

[Fl\\_Browser](#) widget .

```
#include "Fl_Browser_.H"
```

### Classes

- class [Fl\\_Browser](#)

The [Fl\\_Browser](#) widget displays a scrolling list of text lines, and manages all the storage for the text.

### 31.10.1 Detailed Description

[Fl\\_Browser](#) widget .

## 31.11 Fl\_Browser\_.H File Reference

```
Fl_Browser_ widget .  
#include "Fl_Group.H"  
#include "Fl_Scrollbar.H"
```

### Classes

- class [Fl\\_Browser\\_](#)  
*This is the base for browsers.*

### Defines

- #define [FL\\_NORMAL\\_BROWSER](#) 0  
*type() of Fl\_Browser*
- #define [FL\\_SELECT\\_BROWSER](#) 1  
*type() of FL\_Select\_Browser*
- #define [FL\\_HOLD\\_BROWSER](#) 2  
*type() of Fl\_Hold\_Browser*
- #define [FL\\_MULTI\\_BROWSER](#) 3  
*type() of Fl\_Multi\_Browser*

### 31.11.1 Detailed Description

[Fl\\_Browser\\_](#) widget .

## 31.12 Fl\_Button.H File Reference

[Fl\\_Button](#) widget .  
`#include "Fl_Widget.H"`

### Classes

- class [Fl\\_Button](#)  
*Buttons generate callbacks when they are clicked by the user.*

### Defines

- `#define FL_NORMAL_BUTTON 0`  
*value() remains unchanged after button press.*
- `#define FL_TOGGLE_BUTTON 1`  
*value() is inverted after button press.*
- `#define FL_RADIO_BUTTON (FL_RESERVED_TYPE+2)`  
*is set to 1 after button press, and all other buttons in the current group with type () == FL\_RADIO\_BUTTON are set to zero.*
- `#define FL_HIDDEN_BUTTON 3`  
*for Forms compatibility*

### 31.12.1 Detailed Description

[Fl\\_Button](#) widget .

### 31.12.2 Define Documentation

#### 31.12.2.1 #define FL\_RADIO\_BUTTON (FL\_RESERVED\_TYPE+2)

is set to 1 after button press, and all other buttons in the current group with type () == FL\_RADIO\_BUTTON are set to zero.

Referenced by `Fl_Button::handle()`, and `Fl_Button::setonly()`.

## 31.13 Fl\_Cairo.H File Reference

Handling transparently platform dependent cairo include files.

```
#include <FL/Fl_Export.H>
```

### Classes

- class [Fl\\_Cairo\\_State](#)  
*Contains all the necessary info on the current cairo context.*

#### 31.13.1 Detailed Description

Handling transparently platform dependent cairo include files.

## 31.14 Fl\_Cairo\_Window.H File Reference

[Fl\\_Cairo\\_Window](#) Handling transparently a fltk window incorpore a cairo draw callback.

```
#include <FL/Fl.h>
#include <FL/Fl_Double_Window.h>
```

### Classes

- class [Fl\\_Cairo\\_Window](#)

*This defines a pre-configured cairo fltk window.*

### 31.14.1 Detailed Description

[Fl\\_Cairo\\_Window](#) Handling transparently a fltk window incorpore a cairo draw callback.

## 31.15 Fl\_Chart.H File Reference

[Fl\\_Chart](#) widget .

```
#include "Fl_Widget.h"
```

### Classes

- struct [FL\\_CHART\\_ENTRY](#)

*For internal use only.*

- class [Fl\\_Chart](#)

*Fl\_Chart displays simple charts.*

### Defines

- #define [FL\\_BAR\\_CHART](#) 0

*type() for Bar Chart variant*

- #define [FL\\_HORBAR\\_CHART](#) 1

*type() for Horizontal Bar Chart variant*

- #define [FL\\_LINE\\_CHART](#) 2

*type() for Line Chart variant*

- #define [FL\\_FILL\\_CHART](#) 3

*type() for Fill Line Chart variant*

- #define [FL\\_SPIKE\\_CHART](#) 4

*type() for Spike Chart variant*

- #define [FL\\_PIE\\_CHART](#) 5

*type() for Pie Chart variant*

- #define [FL\\_SPECIALPIE\\_CHART](#) 6

*type() for Special Pie Chart variant*

- #define [FL\\_FILLED\\_CHART](#) [FL\\_FILL\\_CHART](#)

*for compatibility*

- #define [FL\\_CHART\\_MAX](#) 128

*max entries per chart*

- #define [FL\\_CHART\\_LABEL\\_MAX](#) 18

*max label length for entry*

### 31.15.1 Detailed Description

[Fl\\_Chart](#) widget .

## 31.16 Fl\_Check\_Browser.H File Reference

[Fl\\_Check\\_Browser](#) widget .

```
#include "Fl.H"
#include "Fl_Browser_.H"
```

### Classes

- class [Fl\\_Check\\_Browser](#)

*The [Fl\\_Check\\_Browser](#) widget displays a scrolling list of text lines that may be selected and/or checked by the user.*

### 31.16.1 Detailed Description

[Fl\\_Check\\_Browser](#) widget .

## 31.17 Fl\_Check\_Button.H File Reference

[Fl\\_Check\\_Button](#) widget .

```
#include "Fl_Light_Button.H"
```

### Classes

- class [Fl\\_Check\\_Button](#)  
*A button with an "checkmark" to show its status.*

#### 31.17.1 Detailed Description

[Fl\\_Check\\_Button](#) widget .

## 31.18 Fl\_Choice.H File Reference

[Fl\\_Choice](#) widget .

```
#include "Fl_Menu_.H"
```

### Classes

- class [Fl\\_Choice](#)  
*A button that is used to pop up a menu.*

#### 31.18.1 Detailed Description

[Fl\\_Choice](#) widget .

## 31.19 Fl\_Clock.H File Reference

[Fl\\_Clock](#), [Fl\\_Clock\\_Output](#) widgets .

```
#include "Fl_Widget.H"
```

### Classes

- class [Fl\\_Clock\\_Output](#)  
*This widget can be used to display a program-supplied time.*
- class [Fl\\_Clock](#)  
*This widget provides a round analog clock display.*

### Defines

- #define [FL\\_SQUARE\\_CLOCK](#) 0  
*type() of Square Clock variant*
- #define [FL\\_ROUND\\_CLOCK](#) 1  
*type() of Round Clock variant*
- #define [FL\\_ANALOG\\_CLOCK](#) [FL\\_SQUARE\\_CLOCK](#)  
*An analog clock is square.*
- #define [FL\\_DIGITAL\\_CLOCK](#) [FL\\_SQUARE\\_CLOCK](#)  
*Not yet implemented.*

### 31.19.1 Detailed Description

[Fl\\_Clock](#), [Fl\\_Clock\\_Output](#) widgets .

## 31.20 fl\_color.cxx File Reference

Color handling.

```
#include "Fl_XColor.H"
#include <FL/Fl.H>
#include <FL/x.H>
#include <FL/fl_draw.H>
#include "fl_cmap.h"
```

### Defines

- #define **fl\_overlay** 0

### Functions

- **ulong fl\_xpixel (uchar r, uchar g, uchar b)**
- **void fl\_color (uchar r, uchar g, uchar b)**

*Set the color for all subsequent drawing operations.*

- **ulong fl\_xpixel (Fl\_Color i)**
- **void fl\_color (Fl\_Color i)**

*Sets the color for all subsequent drawing operations.*

- **Fl\_Color fl\_color\_average (Fl\_Color color1, Fl\_Color color2, float weight)**
- **Fl\_Color fl\_inactive (Fl\_Color c)**
- **Fl\_Color fl\_contrast (Fl\_Color fg, Fl\_Color bg)**

### Variables

- **uchar fl\_redmask**
- **uchar fl\_greenmask**
- **uchar fl\_bluemask**
- **int fl\_redshift**
- **int fl\_greenshift**
- **int fl\_blueShift**
- **int fl\_extrashift**
- **Fl\_XColor fl\_xmap [1][256]**
- **Fl\_Color fl\_color\_**

### 31.20.1 Detailed Description

Color handling.

### 31.20.2 Function Documentation

#### 31.20.2.1 void fl\_color (Fl\_Color *i*)

Sets the color for all subsequent drawing operations.

For colormapped displays, a color cell will be allocated out of *fl\_colormap* the first time you use a color. If the colormap fills up then a least-squares algorithm is used to find the closest color.

**Parameters:**

← *i* color

References fl\_color().

#### 31.20.2.2 void fl\_color (uchar *r*, uchar *g*, uchar *b*)

Set the color for all subsequent drawing operations.

The closest possible match to the RGB color is used. The RGB color is used directly on TrueColor displays. For colormap visuals the nearest index in the gray ramp or color cube is used.

**Parameters:**

← *r,g,b* color components

## 31.21 Fl\_Color\_Chooser.H File Reference

[Fl\\_Color\\_Chooser](#) widget .

```
#include <FL/Fl_Group.H>
#include <FL/Fl_Box.H>
#include <FL/Fl_Return_Button.H>
#include <FL/Fl_Choice.H>
#include <FL/Fl_Value_Input.H>
```

### Classes

- class [Fl\\_Color\\_Chooser](#)

*The [Fl\\_Color\\_Chooser](#) widget provides a standard RGB color chooser.*

### 31.21.1 Detailed Description

[Fl\\_Color\\_Chooser](#) widget .

## 31.22 Fl\_Counter.H File Reference

[Fl\\_Counter](#) widget .

```
#include "Fl_Valuator.H"
```

### Classes

- class [Fl\\_Counter](#)

*Controls a single floating point value with button (or keyboard) arrows.*

### Defines

- #define [FL\\_NORMAL\\_COUNTER](#) 0  
*type() for counter with fast buttons*
- #define [FL\\_SIMPLE\\_COUNTER](#) 1  
*type() for counter without fast buttons*

### 31.22.1 Detailed Description

[Fl\\_Counter](#) widget .

## 31.23 fl\_curve.hxx File Reference

Utility for drawing Bezier curves, adding the points to the current fl\_begin/fl\_vertex/fl\_end path.

```
#include <FL/fl_draw.H>
#include <math.h>
```

### Functions

- void **fl\_curve** (double X0, double Y0, double X1, double Y1, double X2, double Y2, double X3, double Y3)

*Add a series of points on a Bezier curve to the path.*

### 31.23.1 Detailed Description

Utility for drawing Bezier curves, adding the points to the current fl\_begin/fl\_vertex/fl\_end path.

Incremental math implementation: I very much doubt this is optimal! From Foley/vanDam page 511. If anybody has a better algorithm, please send it!

### 31.23.2 Function Documentation

#### 31.23.2.1 void **fl\_curve** (double **X0**, double **Y0**, double **X1**, double **Y1**, double **X2**, double **Y2**, double **X3**, double **Y3**)

Add a series of points on a Bezier curve to the path.

The curve ends (and two of the points) are at X0,Y0 and X3,Y3.

##### Parameters:

← **X0,Y0** curve start point  
← **X1,Y1** curve control point  
← **X2,Y2** curve control point  
← **X3,Y3** curve end point

References fl\_transform\_x(), fl\_transform\_y(), and fl\_transformed\_vertex().

## 31.24 Fl\_Dial.H File Reference

[Fl\\_Dial](#) widget .

```
#include "Fl_Valuator.H"
```

### Classes

- class [Fl\\_Dial](#)

*The [Fl\\_Dial](#) widget provides a circular dial to control a single floating point value.*

### Defines

- #define [FL\\_NORMAL\\_DIAL](#) 0  
*type() for dial variant with dot*
- #define [FL\\_LINE\\_DIAL](#) 1  
*type() for dial variant with line*
- #define [FL\\_FILL\\_DIAL](#) 2  
*type() for dial variant with filled arc*

### 31.24.1 Detailed Description

[Fl\\_Dial](#) widget .

## 31.25 Fl\_Double\_Window.H File Reference

[Fl\\_Double\\_Window](#) widget .

```
#include "Fl_Window.H"
```

### Classes

- class [Fl\\_Double\\_Window](#)

*The [Fl\\_Double\\_Window](#) provides a double-buffered window.*

### 31.25.1 Detailed Description

[Fl\\_Double\\_Window](#) widget .

## 31.26 fl\_draw.H File Reference

utility header to pull drawing functions together

```
#include "Enumerations.H"
```

### Defines

- #define `fl_clip` `fl_push_clip`

*The `fl_clip()` name is deprecated and will be removed from future releases.*

### Typedefs

- `typedef void(* Fl_Draw_Image_Cb )(void *, int, int, int, uchar *)`

### Enumerations

- enum {
   
**FL\_SOLID** = 0, **FL\_DASH** = 1, **FL\_DOT** = 2, **FL\_DASHDOT** = 3,
   
**FL\_DASHDOTDOT** = 4, **FL\_CAP\_FLAT** = 0x100, **FL\_CAP\_ROUND** = 0x200, **FL\_CAP\_SQUARE** = 0x300,
   
**FL\_JOIN\_MITER** = 0x1000, **FL\_JOIN\_ROUND** = 0x2000, **FL\_JOIN\_BEVEL** = 0x3000 }

### Functions

- `FL_EXPORT void fl_color(Fl_Color i)`

*Sets the color for all subsequent drawing operations.*

- `void fl_color(int c)`

- `FL_EXPORT void fl_color(uchar r, uchar g, uchar b)`

*Set the color for all subsequent drawing operations.*

- `Fl_Color fl_color()`

*Returns the last `fl_color()` that was set.*

- `FL_EXPORT void fl_push_clip(int x, int y, int w, int h)`

*Intersect the current clip region with a rectangle and push this new region onto the stack.*

- `FL_EXPORT void fl_push_no_clip()`

*Pushes an empty clip region onto the stack so nothing will be clipped.*

- `FL_EXPORT void fl_pop_clip()`

*Restore the previous clip region.*

- `FL_EXPORT int fl_not_clipped(int x, int y, int w, int h)`

*Does the rectangle intersect the current clip region?*

- FL\_EXPORT int **fl\_clip\_box** (int, int, int, int, int &x, int &y, int &w, int &h)  
*Intersect the rectangle with the current clip region and return the bounding box of the result.*
- FL\_EXPORT void **fl\_point** (int x, int y)  
*Draw a single pixel at the given coordinates.*
- FL\_EXPORT void **fl\_line\_style** (int style, int width=0, char \*dashes=0)
- FL\_EXPORT void **fl\_rect** (int x, int y, int w, int h)  
*Draw a 1-pixel border inside the given bounding box.*
- void **fl\_rect** (int x, int y, int w, int h, **Fl\_Color** c)  
*Draw a 1-pixel border inside the given bounding box.*
- FL\_EXPORT void **fl\_rectf** (int x, int y, int w, int h)  
*Color a rectangle that exactly fills the given bounding box.*
- void **fl\_rectf** (int x, int y, int w, int h, **Fl\_Color** c)  
*Color a rectangle that exactly fills the given bounding box.*
- FL\_EXPORT void **fl\_line** (int x, int y, int x1, int y1)  
*Draw a line from x,y to x1,y1.*
- FL\_EXPORT void **fl\_line** (int x, int y, int x1, int y1, int x2, int y2)  
*Draw a line from x,y to x1,y1 and another from x1,y1 to x2,y2.*
- FL\_EXPORT void **fl\_loop** (int x, int y, int x1, int y1, int x2, int y2)  
*Outline a 3-sided polygon with lines.*
- FL\_EXPORT void **fl\_loop** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)  
*Outline a 4-sided polygon with lines.*
- FL\_EXPORT void **fl\_polygon** (int x, int y, int x1, int y1, int x2, int y2)  
*Fill a 3-sided polygon.*
- FL\_EXPORT void **fl\_polygon** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)  
*Fill a 4-sided polygon.*
- FL\_EXPORT void **fl\_xyline** (int x, int y, int x1)  
*Draw horizontal line from x,y to x1,y.*
- FL\_EXPORT void **fl\_xyline** (int x, int y, int x1, int y2)  
*Draw horizontal line from x,y to x1,y, then vertical from x1,y to x1,y2.*
- FL\_EXPORT void **fl\_xyline** (int x, int y, int x1, int y2, int x3)  
*Draw horizontal line from x,y to x1,y then a vertical from x1,y to x1,y2 and then another horizontal from x1,y2 to x3,y2.*
- FL\_EXPORT void **fl\_yxline** (int x, int y, int y1)  
*Draw a vertical line from x,y to x,y1.*

- FL\_EXPORT void **fl\_yxline** (int x, int y, int y1, int x2)  
*Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1.*
- FL\_EXPORT void **fl\_yxline** (int x, int y, int y1, int x2, int y3)  
*Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1 then another vertical from x2,y1 to x2,y3.*
- FL\_EXPORT void **fl\_arc** (int x, int y, int w, int h, double a1, double a2)  
*Draw ellipse sections using integer coordinates.*
- FL\_EXPORT void **fl\_pie** (int x, int y, int w, int h, double a1, double a2)  
*Draw filled ellipse sections using integer coordinates.*
- FL\_EXPORT void **fl\_chord** (int x, int y, int w, int h, double a1, double a2)  
*fl\_chord declaration is a place holder - the function does not yet exist*
- FL\_EXPORT void **fl\_push\_matrix** ()  
*Save the current transformation matrix on the stack.*
- FL\_EXPORT void **fl\_pop\_matrix** ()  
*Restore the current transformation matrix from the stack.*
- FL\_EXPORT void **fl\_scale** (double x, double y)  
*Concatenate scaling transformation onto the current one.*
- FL\_EXPORT void **fl\_scale** (double x)  
*Concatenate scaling transformation onto the current one.*
- FL\_EXPORT void **fl\_translate** (double x, double y)  
*Concatenate translation transformation onto the current one.*
- FL\_EXPORT void **fl\_rotate** (double d)  
*Concatenate rotation transformation onto the current one.*
- FL\_EXPORT void **fl\_mult\_matrix** (double a, double b, double c, double d, double x, double y)  
*Concatenate another transformation onto the current one.*
- FL\_EXPORT void **fl\_begin\_points** ()  
*Start drawing a list of points.*
- FL\_EXPORT void **fl\_begin\_line** ()  
*Start drawing a list of lines.*
- FL\_EXPORT void **fl\_begin\_loop** ()  
*Start drawing a closed sequence of lines.*
- FL\_EXPORT void **fl\_begin\_polygon** ()  
*Start drawing a convex filled polygon.*
- FL\_EXPORT void **fl\_vertex** (double x, double y)

*Add a single vertex to the current path.*

- FL\_EXPORT void [fl\\_curve](#) (double X0, double Y0, double X1, double Y1, double X2, double Y2, double X3, double Y3)

*Add a series of points on a Bezier curve to the path.*

- FL\_EXPORT void [fl\\_arc](#) (double x, double y, double r, double start, double a)

*Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl\\_arc\(\)](#).*

- FL\_EXPORT void [fl\\_circle](#) (double x, double y, double r)

*[fl\\_circle\(\)](#) is equivalent to [fl\\_arc\(\)](#).*

- FL\_EXPORT void [fl\\_end\\_points](#) ()

*End list of points, and draw.*

- FL\_EXPORT void [fl\\_end\\_line](#) ()

*End list of lines, and draw.*

- FL\_EXPORT void [fl\\_end\\_loop](#) ()

*End closed sequence of lines, and draw.*

- FL\_EXPORT void [fl\\_end\\_polygon](#) ()

*End convex filled polygon, and draw.*

- FL\_EXPORT void [fl\\_begin\\_complex\\_polygon](#) ()

*Start drawing a complex filled polygon.*

- FL\_EXPORT void [fl\\_gap](#) ()

*Call [fl\\_gap\(\)](#) to separate loops of the path.*

- FL\_EXPORT void [fl\\_end\\_complex\\_polygon](#) ()

*End complex filled polygon, and draw.*

- FL\_EXPORT double [fl\\_transform\\_x](#) (double x, double y)

*Transform coordinate using current transformation matrix.*

- FL\_EXPORT double [fl\\_transform\\_y](#) (double x, double y)

*Transform coordinate using current transformation matrix.*

- FL\_EXPORT double [fl\\_transform\\_dx](#) (double x, double y)

*Transform distance using current transformation matrix.*

- FL\_EXPORT double [fl\\_transform\\_dy](#) (double x, double y)

*Transform distance using current transformation matrix.*

- FL\_EXPORT void [fl\\_transformed\\_vertex](#) (double x, double y)

*Add coordinate pair to the vertex list without further transformations.*

- FL\_EXPORT void [fl\\_font](#) ([Fl\\_Font](#) face, [Fl\\_Fontsize](#) size)

- `Fl_Font fl_font()`
- `Fl_Fontsize fl_size()`
- `FL_EXPORT int fl_height()`
- `int fl_height(int, int size)`
- `FL_EXPORT int fl_descent()`
- `FL_EXPORT double fl_width(const char *)`
- `FL_EXPORT double fl_width(const char *, int n)`
- `FL_EXPORT double fl_width(Fl_Unichar)`
- `FL_EXPORT void fl_draw(const char *, int x, int y)`
- `FL_EXPORT void fl_draw(const char *, int n, int x, int y)`
- `FL_EXPORT void fl_rtl_draw(const char *, int n, int x, int y)`
- `FL_EXPORT void fl_measure(const char *, int &x, int &y, int draw_symbols=1)`
- `FL_EXPORT void fl_draw(const char *, int, int, int, int, Fl_Align, Fl_Image *img=0, int draw_symbols=1)`
- `FL_EXPORT void fl_draw(const char *, int, int, int, int, Fl_Align, void(*callthis)(const char *, int n, int x, int y), Fl_Image *img=0, int draw_symbols=1)`
- `FL_EXPORT const char * fl_latin1_to_local(const char *, int n=-1)`
- `FL_EXPORT const char * fl_local_to_latin1(const char *, int n=-1)`
- `FL_EXPORT const char * fl_mac_roman_to_local(const char *, int n=-1)`
- `FL_EXPORT const char * fl_local_to_mac_roman(const char *, int n=-1)`
- `FL_EXPORT void fl_frame(const char *s, int x, int y, int w, int h)`

*Draws a series of line segments around the given box.*
- `FL_EXPORT void fl_frame2(const char *s, int x, int y, int w, int h)`

*Draws a series of line segments around the given box.*
- `FL_EXPORT void fl_draw_box(Fl_Boxtype, int x, int y, int w, int h, Fl_Color)`

*Draw box using given type, position, size and color.*

  - `FL_EXPORT void fl_draw_image(const uchar *, int, int, int, int, int delta=3, int ldelta=0)`
  - `FL_EXPORT void fl_draw_image_mono(const uchar *, int, int, int, int, int delta=1, int ld=0)`
  - `FL_EXPORT void fl_draw_image(Fl_Draw_Image_Cb, void *, int, int, int, int, int delta=3)`
  - `FL_EXPORT void fl_draw_image_mono(Fl_Draw_Image_Cb, void *, int, int, int, int, int delta=1)`
  - `FL_EXPORT void fl_rectf(int x, int y, int w, int h, uchar r, uchar g, uchar b)`
  - `FL_EXPORT char fl_can_do_alpha_blending()`
  - `FL_EXPORT uchar * fl_read_image(uchar *p, int x, int y, int w, int h, int alpha=0)`
  - `FL_EXPORT int fl_draw_pixmap(char *const *data, int x, int y, Fl_Color=FL_GRAY)`
  - `FL_EXPORT int fl_measure_pixmap(char *const *data, int &w, int &h)`
  - `FL_EXPORT int fl_draw_pixmap(const char *const *data, int x, int y, Fl_Color=FL_GRAY)`
  - `FL_EXPORT int fl_measure_pixmap(const char *const *data, int &w, int &h)`
  - `FL_EXPORT void fl_scroll(int X, int Y, int W, int H, int dx, int dy, void(*draw_area)(void *, int, int, int, int), void *data)`
  - `FL_EXPORT const char * fl_shortcut_label(int)`
  - `FL_EXPORT void fl_overlay_rect(int, int, int, int)`
  - `FL_EXPORT void fl_overlay_clear()`
  - `FL_EXPORT void fl_cursor(Fl_Cursor, Fl_Color=FL_BLACK, Fl_Color=FL_WHITE)`
  - `FL_EXPORT const char * fl_expand_text(const char *from, char *buf, int maxbuf, double maxw, int &n, double &width, int wrap, int draw_symbols=0)`
  - `FL_EXPORT void fl_set_status(int X, int Y, int W, int H)`

- FL\_EXPORT void **fl\_set\_spot** (int font, int size, int x, int y, int w, int h)
- FL\_EXPORT void **fl\_reset\_spot** (void)
- FL\_EXPORT int **fl\_draw\_symbol** (const char \*label, int x, int y, int w, int h, **Fl\_Color**)
- FL\_EXPORT int **fl\_add\_symbol** (const char \*name, void(\*drawit)(**Fl\_Color**), int scalable)

## Variables

- FL\_EXPORT char **fl\_draw\_shortcut**
- FL\_EXPORT **Fl\_Color fl\_color\_**
- FL\_EXPORT **Fl\_Font fl\_font\_**
- FL\_EXPORT **Fl\_Fontsize fl\_size\_**

### 31.26.1 Detailed Description

utility header to pull drawing functions together

### 31.26.2 Function Documentation

#### 31.26.2.1 FL\_EXPORT void fl\_arc (double *x*, double *y*, double *r*, double *start*, double *end*)

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl\\_arc\(\)](#).

**Parameters:**

- ← *x,y,r* center and radius of circular arc  
 ← *start,end* angles of start and end of arc measured in degrees counter-clockwise from 3 o'clock. If *end* is less than *start* then it draws the ark in a clockwise direction.

References [fl\\_transform\\_dx\(\)](#), [fl\\_transform\\_dy\(\)](#), and [fl\\_vertex\(\)](#).

#### 31.26.2.2 FL\_EXPORT void fl\_arc (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw ellipse sections using integer coordinates.

These functions match the rather limited circle drawing code provided by X and WIN32. The advantage over using [fl\\_arc](#) with floating point coordinates is that they are faster because they often use the hardware, and they draw much nicer small circles, since the small sizes are often hard-coded bitmaps.

If a complete circle is drawn it will fit inside the passed bounding box. The two angles are measured in degrees counterclockwise from 3'oclock and are the starting and ending angle of the arc, a2 must be greater or equal to a1.

[fl\\_arc\(\)](#) draws a series of lines to approximate the arc. Notice that the integer version of [fl\\_arc\(\)](#) has a different number of arguments than the double version [fl\\_arc\(double x, double y, double r, double start, double a\)](#)

**Parameters:**

- ← *x,y,w,h* bounding box of complete circle  
 ← *a1,a2* start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by [Fl\\_Menu\\_Item::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), and [Fl\\_Dial::draw\(\)](#).

### 31.26.2.3 FL\_EXPORT void fl\_begin\_complex\_polygon()

Start drawing a complex filled polygon.

The polygon may be concave, may have holes in it, or may be several disconnected pieces. Call [fl\\_gap\(\)](#) to separate loops of the path.

To outline the polygon, use [fl\\_begin\\_loop\(\)](#) and replace each [fl\\_gap\(\)](#) with [fl\\_end\\_loop\(\);fl\\_begin\\_loop\(\)](#) pairs.

**Note:**

For portability, you should only draw polygons that appear the same whether "even/odd" or "non-zero" winding rules are used to fill them. Holes should be drawn in the opposite direction to the outside loop.

References [fl\\_begin\\_polygon\(\)](#).

Referenced by [Fl\\_File\\_Icon::draw\(\)](#).

### 31.26.2.4 FL\_EXPORT void fl\_begin\_points()

Start drawing a list of points.

Points are added to the list with [fl\\_vertex\(\)](#)

### 31.26.2.5 FL\_EXPORT void fl\_circle (double *x*, double *y*, double *r*)

[fl\\_circle\(\)](#) is equivalent to [fl\\_arc\(](#)

.. $0,360$ ) but may be faster. It must be the *only* thing in the path: if you want a circle as part of a complex polygon you must use [fl\\_arc\(\)](#)

**Parameters:**

$\leftarrow x,y,r$  center and radius of circle

References [fl\\_transform\\_x\(\)](#), and [fl\\_transform\\_y\(\)](#).

Referenced by [Fl\\_Dial::draw\(\)](#), and [Fl\\_Clock\\_Output::draw\(\)](#).

### 31.26.2.6 FL\_EXPORT int fl\_clip\_box (int *x*, int *y*, int *w*, int *h*, int & *X*, int & *Y*, int & *W*, int & *H*)

Intersect the rectangle with the current clip region and return the bounding box of the result.

Returns non-zero if the resulting rectangle is different to the original. This can be used to limit the necessary drawing to a rectangle. *W* and *H* are set to zero if the rectangle is completely outside the region.

**Parameters:**

$\leftarrow x,y,w,h$  position and size of rectangle

$\rightarrow X,Y,W,H$  position and size of resulting bounding box. *W* and *H* are set to zero if the rectangle is completely outside the region.

**Returns:**

Non-zero if the resulting rectangle is different to the original.

Referenced by Fl\_Text\_Display::draw(), Fl\_Pixmap::draw(), Fl\_RGB\_Image::draw(), Fl\_Bitmap::draw(), and Fl\_Double\_Window::flush().

### 31.26.2.7 **FL\_Color fl\_color()** [inline]

Returns the last [fl\\_color\(\)](#) that was set.

This can be used for state save/restore.

### 31.26.2.8 **FL\_EXPORT void fl\_color (uchar r, uchar g, uchar b)**

Set the color for all subsequent drawing operations.

The closest possible match to the RGB color is used. The RGB color is used directly on TrueColor displays. For colormap visuals the nearest index in the gray ramp or color cube is used.

**Parameters:**

$\leftarrow r, g, b$  color components

### 31.26.2.9 **FL\_EXPORT void fl\_color (Fl\_Color i)**

Sets the color for all subsequent drawing operations.

For colormapped displays, a color cell will be allocated out of *fl\_colormap* the first time you use a color. If the colormap fills up then a least-squares algorithm is used to find the closest color.

**Parameters:**

$\leftarrow i$  color

References [fl\\_color\(\)](#).

Referenced by Fl\_Text\_Display::clear\_rect(), Fl\_Timer::draw(), Fl\_FormsPixmap::draw(), Fl\_FormsBitmap::draw(), Fl\_Window::draw(), Fl\_Value\_Slider::draw(), Fl\_Value\_Output::draw(), Fl\_Scrollbar::draw(), Fl\_Scroll::draw(), Fl\_Roller::draw(), Fl\_Pack::draw(), Fl\_Menu\_Button::draw(), Fl\_Menu\_Bar::draw(), Fl\_Menu\_Item::draw(), Fl\_Light\_Button::draw(), Fl\_File\_Icon::draw(), Fl\_Dial::draw(), Fl\_Counter::draw(), Fl\_Clock\_Output::draw(), Fl\_Choice::draw(), Fl\_Browser\_::draw(), Fl\_Adjuster::draw(), Fl\_Text\_Display::draw\_cursor(), Fl\_Image::draw\_empty(), Fl\_Widget::draw\_focus(), Fl\_Text\_Display::draw\_string(), Fl\_Input\_::drawtext(), [fl\\_color\(\)](#), [fl\\_down\\_box\(\)](#), [fl\\_embossed\\_box\(\)](#), [fl\\_engraved\\_box\(\)](#), [fl\\_frame\(\)](#), [fl\\_frame2\(\)](#), [fl\\_rect\(\)](#), [fl\\_rectbound\(\)](#), [fl\\_rectf\(\)](#), [fl\\_thin\\_down\\_box\(\)](#), [fl\\_thin\\_up\\_box\(\)](#), [fl\\_up\\_box\(\)](#), and Fl\_Browser::item\_draw().

### 31.26.2.10 **FL\_EXPORT void fl\_curve (double X0, double Y0, double X1, double Y1, double X2, double Y2, double X3, double Y3)**

Add a series of points on a Bezier curve to the path.

The curve ends (and two of the points) are at X0,Y0 and X3,Y3.

**Parameters:**

$\leftarrow X0, Y0$  curve start point

$\leftarrow X1, Y1$  curve control point

$\leftarrow X2, Y2$  curve control point  
 $\leftarrow X3, Y3$  curve end point

References `fl_transform_x()`, `fl_transform_y()`, and `fl_transformed_vertex()`.

### 31.26.2.11 FL\_EXPORT void fl\_draw\_box (Fl\_Boxtype *t*, int *x*, int *y*, int *w*, int *h*, Fl\_Color *c*)

Draw box using given type, position, size and color.

**Parameters:**

$\leftarrow t$  box type  
 $\leftarrow x, y, w, h$  position and size  
 $\leftarrow c$  color

Referenced by `Fl_Menu_Item::draw()`.

### 31.26.2.12 FL\_EXPORT void fl\_frame (const char \* *s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: top, left, bottom, right. The results of calling `fl_frame()` with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and `fl_frame2()` is the order of the line segments.

**Parameters:**

$\leftarrow s$  sets of 4 grayscale values in top, left, bottom, right order  
 $\leftarrow x, y, w, h$  position and size

References `fl_color()`, `fl_xyline()`, and `fl_yxline()`.

Referenced by `fl_down_frame()`, `fl_embossed_frame()`, `fl_engraved_frame()`, and `fl_up_frame()`.

### 31.26.2.13 FL\_EXPORT void fl\_frame2 (const char \* *s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: bottom, right, top, left. The results of calling `fl_frame2()` with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and `fl_frame()` is the order of the line segments.

**Parameters:**

$\leftarrow s$  sets of 4 grayscale values in bottom, right, top, left order  
 $\leftarrow x, y, w, h$  position and size

References `fl_color()`, `fl_xyline()`, and `fl_yxline()`.

Referenced by `fl_down_frame()`, `fl_thin_down_frame()`, `fl_thin_up_frame()`, and `fl_up_frame()`.

**31.26.2.14 FL\_EXPORT void fl\_gap()**

Call [fl\\_gap\(\)](#) to separate loops of the path.

It is unnecessary but harmless to call [fl\\_gap\(\)](#) before the first vertex, after the last vertex, or several times in a row.

References [fl\\_transformed\\_vertex\(\)](#).

Referenced by [fl\\_end\\_complex\\_polygon\(\)](#).

**31.26.2.15 FL\_EXPORT void fl\_mult\_matrix (double *a*, double *b*, double *c*, double *d*, double *x*, double *y*)**

Concatenate another transformation onto the current one.

**Parameters:**

$\leftarrow \mathbf{a}, \mathbf{b}, \mathbf{c}, \mathbf{d}, \mathbf{x}, \mathbf{y}$  transformation matrix elements such that  $X' = aX + cY + x$  and  $Y' = bX + dY + y$

Referenced by [fl\\_rotate\(\)](#), [fl\\_scale\(\)](#), and [fl\\_translate\(\)](#).

**31.26.2.16 FL\_EXPORT int fl\_not\_clipped (int *x*, int *y*, int *w*, int *h*)**

Does the rectangle intersect the current clip region?

**Parameters:**

$\leftarrow \mathbf{x}, \mathbf{y}, \mathbf{w}, \mathbf{h}$  position and size of rectangle

**Returns:**

non-zero if any of the rectangle intersects the current clip region. If this returns 0 you don't have to draw the object.

**Note:**

Under X this returns 2 if the rectangle is partially clipped, and 1 is it is entirely inside the clip region.

Referenced by [Fl\\_Group::draw\\_child\(\)](#), and [Fl\\_Group::update\\_child\(\)](#).

**31.26.2.17 FL\_EXPORT void fl\_pie (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)**

Draw filled ellipse sections using integer coordinates.

Like [fl\\_arc\(\)](#), but [fl\\_pie\(\)](#) draws a filled-in pie slice. This slice may extend outside the line drawn by [fl\\_arc](#); to avoid this use w - 1 and h - 1.

**Parameters:**

$\leftarrow \mathbf{x}, \mathbf{y}, \mathbf{w}, \mathbf{h}$  bounding box of complete circle

$\leftarrow \mathbf{a1}, \mathbf{a2}$  start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by [Fl\\_Menu\\_Item::draw\(\)](#), [Fl\\_Light\\_Button::draw\(\)](#), and [Fl\\_Dial::draw\(\)](#).

**31.26.2.18 FL\_EXPORT void fl\_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*, int *x3*, int *y3*)**

Fill a 4-sided polygon.

The polygon must be convex.

**31.26.2.19 FL\_EXPORT void fl\_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*)**

Fill a 3-sided polygon.

The polygon must be convex.

Referenced by Fl\_Scrollbar::draw(), and Fl\_Choice::draw().

**31.26.2.20 FL\_EXPORT void fl\_pop\_clip ()**

Restore the previous clip region.

You must call [fl\\_pop\\_clip\(\)](#) once for every time you call [fl\\_push\\_clip\(\)](#). Unpredictable results may occur if the clip stack is not empty when you return to FLTK.

References fl\_restore\_clip(), and Fl::warning.

Referenced by Fl\_Tiled\_Image::draw(), Fl\_Text\_Display::draw(), Fl\_Tabs::draw(), Fl\_Scroll::draw(), Fl\_Progress::draw(), Fl\_Choice::draw(), Fl\_Chart::draw(), Fl\_Browser\_::draw(), Fl\_Group::draw\_children(), Fl\_Text\_Display::draw\_text(), and Fl\_Input\_::drawtext().

**31.26.2.21 FL\_EXPORT void fl\_push\_clip (int *x*, int *y*, int *w*, int *h*)**

Intersect the current clip region with a rectangle and push this new region onto the stack.

**Parameters:**

$\leftarrow x, y, w, h$  position and size

References fl\_restore\_clip(), and Fl::warning.

Referenced by Fl\_Text\_Display::draw(), Fl\_Tabs::draw(), Fl\_Chart::draw(), Fl\_Browser\_::draw(), Fl\_Group::draw\_children(), Fl\_Text\_Display::draw\_text(), and Fl\_Input\_::drawtext().

**31.26.2.22 FL\_EXPORT void fl\_push\_matrix ()**

Save the current transformation matrix on the stack.

The maximum depth of the stack is 4.

References Fl::error.

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and Fl\_Clock\_Output::draw().

**31.26.2.23 FL\_EXPORT void fl\_rotate (double *d*)**

Concatenate rotation transformation onto the current one.

**Parameters:**

$\leftarrow d$  - rotation angle, counter-clockwise in degrees (not radians)

References fl\_mult\_matrix().

Referenced by Fl\_Dial::draw(), and Fl\_Clock\_Output::draw().

### 31.26.2.24 FL\_EXPORT void fl\_scale (double *x*)

Concatenate scaling transformation onto the current one.

#### Parameters:

← *x* scale factor in both x-direction and y-direction

References fl\_mult\_matrix().

### 31.26.2.25 FL\_EXPORT void fl\_scale (double *x*, double *y*)

Concatenate scaling transformation onto the current one.

#### Parameters:

← *x,y* scale factors in x-direction and y-direction

References fl\_mult\_matrix().

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and Fl\_Clock\_Output::draw().

### 31.26.2.26 FL\_EXPORT double fl\_transform\_dx (double *x*, double *y*)

Transform distance using current transformation matrix.

#### Parameters:

← *x,y* coordinate

Referenced by fl\_arc().

### 31.26.2.27 FL\_EXPORT double fl\_transform\_dy (double *x*, double *y*)

Transform distance using current transformation matrix.

#### Parameters:

← *x,y* coordinate

Referenced by fl\_arc().

### 31.26.2.28 FL\_EXPORT double fl\_transform\_x (double *x*, double *y*)

Transform coordinate using current transformation matrix.

#### Parameters:

← *x,y* coordinate

Referenced by fl\_circle(), and fl\_curve().

**31.26.2.29 FL\_EXPORT double fl\_transform\_y (double x, double y)**

Transform coordinate using current transformation matrix.

**Parameters:**

← *x,y* coordinate

Referenced by fl\_circle(), and fl\_curve().

**31.26.2.30 FL\_EXPORT void fl\_transformed\_vertex (double xf, double yf)**

Add coordinate pair to the vertex list without further transformations.

**Parameters:**

← *xf,yf* transformed coordinate

References fl\_transformed\_vertex().

Referenced by fl\_curve(), fl\_end\_loop(), fl\_gap(), fl\_transformed\_vertex(), and fl\_vertex().

**31.26.2.31 FL\_EXPORT void fl\_translate (double x, double y)**

Concatenate translation transformation onto the current one.

**Parameters:**

← *x,y* translation factor in x-direction and y-direction

References fl\_mult\_matrix().

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and Fl\_Clock\_Output::draw().

**31.26.2.32 FL\_EXPORT void fl\_vertex (double x, double y)**

Add a single vertex to the current path.

**Parameters:**

← *x,y* coordinate

References fl\_transformed\_vertex().

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and fl\_arc().

## 31.27 Fl\_File\_Browser.H File Reference

[Fl\\_File\\_Browser](#) widget .

```
#include "Fl_Browser.H"
#include "Fl_File_Icon.H"
#include "filename.H"
```

### Classes

- class [Fl\\_File\\_Browser](#)

*The Fl\_File\_Browser widget displays a list of filenames, optionally with file-specific icons.*

### 31.27.1 Detailed Description

[Fl\\_File\\_Browser](#) widget .

## 31.28 Fl\_File\_Icon.H File Reference

[Fl\\_File\\_Icon](#) widget .

```
#include "Fl.H"
```

### Classes

- class [Fl\\_File\\_Icon](#)

The [Fl\\_File\\_Icon](#) class manages icon images that can be used as labels in other widgets and as icons in the [FileBrowser](#) widget.

### Defines

- #define [FL\\_ICON\\_COLOR](#) ([Fl\\_Color](#))0xffffffff  
*icon color [background?]*

### 31.28.1 Detailed Description

[Fl\\_File\\_Icon](#) widget .

## 31.29 Fl\_File\_Input.H File Reference

[Fl\\_File\\_Input](#) widget .  
#include <FL/Fl\_Input.H>

### Classes

- class [Fl\\_File\\_Input](#)  
*This widget displays a pathname in a text input field.*

#### 31.29.1 Detailed Description

[Fl\\_File\\_Input](#) widget .

## 31.30 Fl\_Fill\_Dial.H File Reference

[Fl\\_Fill\\_Dial](#) widget .

```
#include "Fl_Dial.H"
```

### Classes

- class [Fl\\_Fill\\_Dial](#)  
*Draws a dial with a filled arc.*

#### 31.30.1 Detailed Description

[Fl\\_Fill\\_Dial](#) widget .

## 31.31 Fl\_Fill\_Slider.H File Reference

[Fl\\_Fill\\_Slider](#) widget .  
`#include "Fl_Slider.H"`

### Classes

- class [Fl\\_Fill\\_Slider](#)  
*Widget that draws a filled horizontal slider, useful as a progress or value meter.*

#### 31.31.1 Detailed Description

[Fl\\_Fill\\_Slider](#) widget .

## 31.32 Fl\_Float\_Input.H File Reference

[Fl\\_Float\\_Input](#) widget .  
`#include "Fl_Input.H"`

### Classes

- class [Fl\\_Float\\_Input](#)

The [Fl\\_Float\\_Input](#) class is a subclass of [Fl\\_Input](#) that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits).

### 31.32.1 Detailed Description

[Fl\\_Float\\_Input](#) widget .

## 31.33 Fl\_FormsBitmap.H File Reference

[Fl\\_FormsBitmap](#) widget .

```
#include "Fl_Bitmap.H"
```

### Classes

- class [Fl\\_FormsBitmap](#)

*Forms compatibility Bitmap Image Widget.*

### 31.33.1 Detailed Description

[Fl\\_FormsBitmap](#) widget .

## 31.34 Fl\_FormsPixmap.H File Reference

[Fl\\_FormsPixmap](#) widget .

```
#include "Fl_Pixmap.H"
```

### Classes

- class [Fl\\_FormsPixmap](#)

*Forms pixmap drawing routines.*

### 31.34.1 Detailed Description

[Fl\\_FormsPixmap](#) widget .

## 31.35 Fl\_Free.H File Reference

[Fl\\_Free](#) widget .

```
#include "Fl_Widget.h"
```

### Classes

- class [Fl\\_Free](#)

*Emulation of the Forms "free" widget.*

### Defines

- #define [FL\\_NORMAL\\_FREE](#) 1  
*normal event handling*
- #define [FL\\_SLEEPING\\_FREE](#) 2  
*deactivate event handling*
- #define [FL\\_INPUT\\_FREE](#) 3  
*accepts FL\_FOCUS events*
- #define [FL\\_CONTINUOUS\\_FREE](#) 4  
*repeated timeout handling*
- #define [FL\\_ALL\\_FREE](#) 5  
*FL\_INPUT\_FREE and FL\_CONTINUOUS\_FREE.*
- #define [FL\\_MOUSE](#) [FL\\_DRAG](#)  
*for backward compatibility*
- #define [FL\\_DRAW](#) 100  
*for backward compatibility [UNUSED]*
- #define [FL\\_STEP](#) 101  
*for backward compatibility*
- #define [FL\\_FREEMEM](#) 102  
*for backward compatibility [UNUSED]*
- #define [FL\\_FREEZE](#) 103  
*for backward compatibility [UNUSED]*
- #define [FL\\_THAW](#) 104  
*for backward compatibility [UNUSED]*

## Typedefs

- `typedef int(* FL_HANDLEPTR )(Fl_Widget *, int, float, float, char)`  
*appropriate signature for handle function*

### 31.35.1 Detailed Description

`Fl_Free` widget .

## 31.36 Fl\_GIF\_Image.H File Reference

[Fl\\_GIF\\_Image](#) widget .  
`#include "Fl_Pixmap.H"`

### Classes

- class [Fl\\_GIF\\_Image](#)

The [Fl\\_GIF\\_Image](#) class supports loading, caching, and drawing of Compuserve GIF<sup>SM</sup> images.

### 31.36.1 Detailed Description

[Fl\\_GIF\\_Image](#) widget .

## 31.37 Fl\_Gl\_Window.H File Reference

[Fl\\_Gl\\_Window](#) widget .

```
#include "Fl_Window.H"
```

### Classes

- class [Fl\\_Gl\\_Window](#)

The [Fl\\_Gl\\_Window](#) widget sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws.

### Typedefs

- typedef void \* [GLContext](#)  
*opaque pointer type to hide system specific implementation.*

#### 31.37.1 Detailed Description

[Fl\\_Gl\\_Window](#) widget .

## 31.38 Fl\_Group.H File Reference

[Fl\\_Group](#), [Fl\\_End](#) classes .

```
#include "Fl_Widget.H"
```

### Classes

- class [Fl\\_Group](#)

*The [Fl\\_Group](#) class is the FLTK container widget.*

- class [Fl\\_End](#)

*This is a dummy class that allows you to end a [Fl\\_Group](#) in a constructor list of a class:.*

### 31.38.1 Detailed Description

[Fl\\_Group](#), [Fl\\_End](#) classes .

## 31.39 Fl\_Help\_Dialog.H File Reference

[Fl\\_Help\\_Dialog](#) widget .

```
#include <FL/Fl.H>
#include <FL/Fl_Double_Window.H>
#include <FL/Fl_Group.H>
#include <FL/Fl_Button.H>
#include <FL/Fl_Input.H>
#include <FL/Fl_Box.H>
#include <FL/Fl_Help_View.H>
```

### Classes

- class [Fl\\_Help\\_Dialog](#)

*The [Fl\\_Help\\_Dialog](#) widget displays a standard help dialog window using the [Fl\\_Help\\_View](#) widget.*

### 31.39.1 Detailed Description

[Fl\\_Help\\_Dialog](#) widget .

## 31.40 Fl\_Help\_View.H File Reference

```
Fl_Help_View widget .  
#include <stdio.h>  
#include "Fl.H"  
#include "Fl_Group.H"  
#include "Fl_Scrollbar.H"  
#include "fl_draw.H"  
#include "Fl_Shared_Image.H"
```

### Classes

- struct [Fl\\_Help\\_Block](#)
- struct [Fl\\_Help\\_Link](#)

*Definition of a link for the html viewer.*

- struct [Fl\\_Help\\_Target](#)

*Fl\_Help\_Target structure.*

- class [Fl\\_Help\\_View](#)

*The Fl\_Help\_View widget displays HTML text.*

### Typedefs

- typedef const char \*( [Fl\\_Help\\_Func](#) )([Fl\\_Widget](#) \*, const char \*)

### 31.40.1 Detailed Description

[Fl\\_Help\\_View](#) widget .

## 31.41 Fl\_Hold\_Browser.H File Reference

[Fl\\_Hold\\_Browser](#) widget .

```
#include "Fl_Browser.H"
```

### Classes

- class [Fl\\_Hold\\_Browser](#)

The [Fl\\_Hold\\_Browser](#) is a subclass of [Fl\\_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

### 31.41.1 Detailed Description

[Fl\\_Hold\\_Browser](#) widget .

## 31.42 Fl\_Hor\_Fill\_Slider.H File Reference

Fl\_Hor\_Fill\_Slider widget .

```
#include "Fl_Slider.H"
```

### Classes

- class **Fl\_Hor\_Fill\_Slider**

#### 31.42.1 Detailed Description

Fl\_Hor\_Fill\_Slider widget .

## 31.43 Fl\_Hor\_Nice\_Slider.H File Reference

Fl\_Hor\_Nice\_Slider widget .

```
#include "Fl_Slider.H"
```

### Classes

- class **Fl\_Hor\_Nice\_Slider**

#### 31.43.1 Detailed Description

Fl\_Hor\_Nice\_Slider widget .

## 31.44 Fl\_Hor\_Slider.H File Reference

Fl\_Hor\_Slider widget .

```
#include "Fl_Slider.H"
```

### Classes

- class **Fl\_Hor\_Slider**

#### 31.44.1 Detailed Description

Fl\_Hor\_Slider widget .

## 31.45 Fl\_Hor\_Value\_Slider.H File Reference

Fl\_Hor\_Value\_Slider widget .  
#include "Fl\_Value\_Slider.H"

### Classes

- class **Fl\_Hor\_Value\_Slider**

#### 31.45.1 Detailed Description

Fl\_Hor\_Value\_Slider widget .

## 31.46 Fl\_Image.H File Reference

[Fl\\_Image](#), [Fl\\_RGB\\_Image](#) classes .

```
#include "Enumerations.H"
```

### Classes

- class [Fl\\_Image](#)

*Fl\_Image* is the base class used for caching and drawing all kinds of images in FLTK.

- class [Fl\\_RGB\\_Image](#)

The [Fl\\_RGB\\_Image](#) class supports caching and drawing of full-color images with 1 to 4 channels of color information.

### 31.46.1 Detailed Description

[Fl\\_Image](#), [Fl\\_RGB\\_Image](#) classes .

## 31.47 Fl\_Input.H File Reference

[Fl\\_Input](#) widget .

```
#include "Fl_Input_.H"
```

### Classes

- class [Fl\\_Input](#)

*This is the FLTK text input widget.*

### 31.47.1 Detailed Description

[Fl\\_Input](#) widget .

## 31.48 Fl\_Input\_.H File Reference

[Fl\\_Input\\_](#) widget .

```
#include "Fl_Widget.H"
```

### Classes

- class [Fl\\_Input\\_](#)

*This is a virtual base class below [Fl\\_Input](#).*

### Defines

- #define **FL\_NORMAL\_INPUT** 0
- #define **FL\_FLOAT\_INPUT** 1
- #define **FL\_INT\_INPUT** 2
- #define **FL\_HIDDEN\_INPUT** 3
- #define **FL\_MULTILINE\_INPUT** 4
- #define **FL\_SECRET\_INPUT** 5
- #define **FL\_INPUT\_TYPE** 7
- #define **FL\_INPUT\_READONLY** 8
- #define **FL\_NORMAL\_OUTPUT** (**FL\_NORMAL\_INPUT** | **FL\_INPUT\_READONLY**)
- #define **FL\_MULTILINE\_OUTPUT** (**FL\_MULTILINE\_INPUT** | **FL\_INPUT\_READONLY**)
- #define **FL\_INPUT\_WRAP** 16
- #define **FL\_MULTILINE\_INPUT\_WRAP** (**FL\_MULTILINE\_INPUT** | **FL\_INPUT\_WRAP**)
- #define **FL\_MULTILINE\_OUTPUT\_WRAP** (**FL\_MULTILINE\_INPUT** | **FL\_INPUT\_READONLY** | **FL\_INPUT\_WRAP**)

### 31.48.1 Detailed Description

[Fl\\_Input\\_](#) widget .

## 31.49 Fl\_Input\_Choice.H File Reference

[Fl\\_Input\\_Choice](#) widget .

```
#include <FL/Fl.H>
#include <FL/Fl_Group.H>
#include <FL/Fl_Input.H>
#include <FL/Fl_Menu_Button.H>
#include <FL/fl_draw.H>
#include <string.h>
```

### Classes

- class [Fl\\_Input\\_Choice](#)  
*A combination of the input widget and a menu button.*
- class [Fl\\_Input\\_Choice::InputMenuButton](#)

### 31.49.1 Detailed Description

[Fl\\_Input\\_Choice](#) widget .

## 31.50 Fl\_Int\_Input.H File Reference

[Fl\\_Int\\_Input](#) widget .

```
#include "Fl_Input.H"
```

### Classes

- class [Fl\\_Int\\_Input](#)

The [Fl\\_Int\\_Input](#) class is a subclass of [Fl\\_Input](#) that only allows the user to type decimal digits (or hex numbers of the form 0xaef).

### 31.50.1 Detailed Description

[Fl\\_Int\\_Input](#) widget .

## 31.51 Fl\_JPEG\_Image.H File Reference

[Fl\\_JPEG\\_Image](#) class .

```
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_JPEG\\_Image](#)

The [Fl\\_JPEG\\_Image](#) class supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images.

### 31.51.1 Detailed Description

[Fl\\_JPEG\\_Image](#) class .

## 31.52 Fl\_Light\_Button.H File Reference

[Fl\\_Light\\_Button](#) widget .

```
#include "Fl_Button.H"
```

### Classes

- class [Fl\\_Light\\_Button](#)

#### 31.52.1 Detailed Description

[Fl\\_Light\\_Button](#) widget .

## 31.53 Fl\_Line\_Dial.H File Reference

```
Fl_Line_Dial widget .  
#include "Fl_Dial.H"
```

### Classes

- class **Fl\_Line\_Dial**

#### 31.53.1 Detailed Description

```
Fl_Line_Dial widget .
```

## 31.54 Fl\_Menu\_.H File Reference

[Fl\\_Menu\\_](#) widget .

```
#include "Fl_Widget.H"
#include "Fl_Menu_Item.H"
```

### Classes

- class [Fl\\_Menu\\_](#)  
*Base class of all widgets that have a menu in FLTK.*

#### 31.54.1 Detailed Description

[Fl\\_Menu\\_](#) widget .

## 31.55 Fl\_Menu\_Bar.H File Reference

[Fl\\_Menu\\_Bar](#) widget .  
#include "Fl\_Menu\_.H"

### Classes

- class [Fl\\_Menu\\_Bar](#)  
*This widget provides a standard menubar interface.*

### 31.55.1 Detailed Description

[Fl\\_Menu\\_Bar](#) widget .

## 31.56 Fl\_Menu\_Button.H File Reference

[Fl\\_Menu\\_Button](#) widget .

```
#include "Fl_Menu_.H"
```

### Classes

- class [Fl\\_Menu\\_Button](#)

*This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of [Fl\\_Menu\\_Item](#) objects.*

### 31.56.1 Detailed Description

[Fl\\_Menu\\_Button](#) widget .

## 31.57 Fl\_Menu\_Window.H File Reference

[Fl\\_Menu\\_Window](#) widget .

```
#include "Fl_Single_Window.H"
```

### Classes

- class [Fl\\_Menu\\_Window](#)

The [Fl\\_Menu\\_Window](#) widget is a window type used for menus.

### 31.57.1 Detailed Description

[Fl\\_Menu\\_Window](#) widget .

## 31.58 Fl\_Multi\_Browser.H File Reference

[Fl\\_Multi\\_Browser](#) widget .

```
#include "Fl_Browser.H"
```

### Classes

- class [Fl\\_Multi\\_Browser](#)

The [Fl\\_Multi\\_Browser](#) class is a subclass of [Fl\\_Browser](#) which lets the user select any set of the lines.

### 31.58.1 Detailed Description

[Fl\\_Multi\\_Browser](#) widget .

## 31.59 Fl\_Multiline\_Input.H File Reference

[Fl\\_Multiline\\_Input](#) widget .

```
#include "Fl_Input.H"
```

### Classes

- class [Fl\\_Multiline\\_Input](#)

*This input field displays '  
' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys.*

### 31.59.1 Detailed Description

[Fl\\_Multiline\\_Input](#) widget .

## 31.60 Fl\_Multiline\_Output.H File Reference

[Fl\\_Multiline\\_Output](#) widget .

```
#include "Fl_Output.h"
```

### Classes

- class [Fl\\_Multiline\\_Output](#)

*This widget is a subclass of [Fl\\_Output](#) that displays multiple lines of text.*

### 31.60.1 Detailed Description

[Fl\\_Multiline\\_Output](#) widget .

## 31.61 Fl\_Nice\_Slider.H File Reference

```
Fl_Nice_Slider widget .  
#include "Fl_Slider.H"
```

### Classes

- class **Fl\_Nice\_Slider**

#### 31.61.1 Detailed Description

```
Fl_Nice_Slider widget .
```

## 31.62 Fl\_Output.H File Reference

[Fl\\_Output](#) widget .

```
#include "Fl_Input.H"
```

### Classes

- class [Fl\\_Output](#)

*This widget displays a piece of text.*

### 31.62.1 Detailed Description

[Fl\\_Output](#) widget .

## 31.63 Fl\_Overlay\_Window.H File Reference

[Fl\\_Overlay\\_Window](#) class .

```
#include "Fl_Double_Window.H"
```

### Classes

- class [Fl\\_Overlay\\_Window](#)

*This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image.*

### 31.63.1 Detailed Description

[Fl\\_Overlay\\_Window](#) class .

## 31.64 Fl\_Pack.H File Reference

[Fl\\_Pack](#) widget .

```
#include <FL/Fl_Group.H>
```

### Classes

- class [Fl\\_Pack](#)

*This widget was designed to add the functionality of compressing and aligning widgets.*

### 31.64.1 Detailed Description

[Fl\\_Pack](#) widget .

## 31.65 Fl\_Pixmap.H File Reference

[Fl\\_Pixmap](#) widget .  
#include "Fl\_Image.H"

### Classes

- class [Fl\\_Pixmap](#)

The [Fl\\_Pixmap](#) class supports caching and drawing of colormap ( pixmap ) images, including transparency.

### 31.65.1 Detailed Description

[Fl\\_Pixmap](#) widget .

## 31.66 Fl\_PNG\_Image.H File Reference

[Fl\\_PNG\\_Image](#) class .

```
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_PNG\\_Image](#)

*The [Fl\\_PNG\\_Image](#) class supports loading, caching, and drawing of Portable Network Graphics (PNG) image files.*

### 31.66.1 Detailed Description

[Fl\\_PNG\\_Image](#) class .

## 31.67 Fl\_PNM\_Image.H File Reference

[Fl\\_PNM\\_Image](#) class .

```
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_PNM\\_Image](#)

The [Fl\\_PNM\\_Image](#) class supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files.

### 31.67.1 Detailed Description

[Fl\\_PNM\\_Image](#) class .

## 31.68 Fl\_Positioner.H File Reference

[Fl\\_Positioner](#) widget .  
#include "Fl\_Widget.H"

### Classes

- class [Fl\\_Positioner](#)  
*This class is provided for Forms compatibility.*

#### 31.68.1 Detailed Description

[Fl\\_Positioner](#) widget .

## 31.69 Fl\_Preferences.H File Reference

[Fl\\_Preferences](#) class .

```
#include <stdio.h>
#include "Fl_Export.H"
```

### Classes

- class [Fl\\_Preferences](#)

*Fl\_Preferences* provides methods to store user settings between application starts.

- class [Fl\\_Preferences::Name](#)

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

- struct [Fl\\_Preferences::Entry](#)

An entry associates a preference name to its corresponding value.

- class [Fl\\_Preferences::Node](#)

- class [Fl\\_Preferences::RootNode](#)

### 31.69.1 Detailed Description

[Fl\\_Preferences](#) class .

## 31.70 Fl\_Progress.H File Reference

[Fl\\_Progress](#) widget .

```
#include "Fl_Widget.H"
```

### Classes

- class [Fl\\_Progress](#)

*Displays a progress bar for the user.*

### 31.70.1 Detailed Description

[Fl\\_Progress](#) widget .

## 31.71 Fl\_Radio\_Button.H File Reference

Fl\_Radio\_Button widget .  
#include "Fl\_Button.H"

### Classes

- class **Fl\_Radio\_Button**

#### 31.71.1 Detailed Description

Fl\_Radio\_Button widget .

## 31.72 Fl\_Radio\_Light\_Button.H File Reference

Fl\_Radio\_Light\_Button widget .  
#include "Fl\_Light\_Button.H"

### Classes

- class **Fl\_Radio\_Light\_Button**

#### 31.72.1 Detailed Description

Fl\_Radio\_Light\_Button widget .

## 31.73 Fl\_Radio\_Round\_Button.H File Reference

```
Fl_Radio_Round_Button widget .  
#include "Fl_Round_Button.H"
```

### Classes

- class **Fl\_Radio\_Round\_Button**

#### 31.73.1 Detailed Description

```
Fl_Radio_Round_Button widget .
```

## 31.74 fl\_rect.cxx File Reference

Drawing and clipping routines for rectangles.

```
#include <config.h>
#include <FL/F1.H>
#include <FL/F1_Widget.H>
#include <FL/fl_draw.H>
#include <FL/x.H>
```

### Defines

- #define **STACK\_SIZE** 10
- #define **STACK\_MAX** (STACK\_SIZE - 1)

### Functions

- void **fl\_rect** (int x, int y, int w, int h)  
*Draw a 1-pixel border inside the given bounding box.*
- void **fl\_rectf** (int x, int y, int w, int h)  
*Color a rectangle that exactly fills the given bounding box.*
- void **fl\_xyline** (int x, int y, int x1)  
*Draw horizontal line from x,y to x1,y.*
- void **fl\_xyline** (int x, int y, int x1, int y2)  
*Draw horizontal line from x,y to x1,y, then vertical from x1,y to x1,y2.*
- void **fl\_xyline** (int x, int y, int x1, int y2, int x3)  
*Draw horizontal line from x,y to x1,y then a vertical from x1,y to x1,y2 and then another horizontal from x1,y2 to x3,y2.*
- void **fl\_yxline** (int x, int y, int y1)  
*Draw a vertical line from x,y to x,y1.*
- void **fl\_yxline** (int x, int y, int y1, int x2)  
*Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1.*
- void **fl\_yxline** (int x, int y, int y1, int x2, int y3)  
*Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1 then another vertical from x2,y1 to x2,y3.*
- void **fl\_line** (int x, int y, int x1, int y1)  
*Draw a line from x,y to x1,y1.*
- void **fl\_line** (int x, int y, int x1, int y1, int x2, int y2)  
*Draw a line from x,y to x1,y1 and another from x1,y1 to x2,y2.*

- void **fl\_loop** (int x, int y, int x1, int y1, int x2, int y2)  
*Outline a 3-sided polygon with lines.*
- void **fl\_loop** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)  
*Outline a 4-sided polygon with lines.*
- void **fl\_polygon** (int x, int y, int x1, int y1, int x2, int y2)  
*Fill a 3-sided polygon.*
- void **fl\_polygon** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)  
*Fill a 4-sided polygon.*
- void **fl\_point** (int x, int y)  
*Draw a single pixel at the given coordinates.*
- Fl\_Region **XRectangleRegion** (int x, int y, int w, int h)
- void **fl\_restore\_clip** ()  
*Undoes any clobbering of clip done by your program.*
- void **fl\_clip\_region** (Fl\_Region r)  
*Replace the top of the clipping stack with a clipping region of any shape.*
- Fl\_Region **fl\_clip\_region** ()
- void **fl\_push\_clip** (int x, int y, int w, int h)  
*Intersect the current clip region with a rectangle and push this new region onto the stack.*
- void **fl\_push\_no\_clip** ()  
*Pushes an empty clip region onto the stack so nothing will be clipped.*
- void **fl\_pop\_clip** ()  
*Restore the previous clip region.*
- int **fl\_not\_clipped** (int x, int y, int w, int h)  
*Does the rectangle intersect the current clip region?*
- int **fl\_clip\_box** (int x, int y, int w, int h, int &X, int &Y, int &W, int &H)  
*Intersect the rectangle with the current clip region and return the bounding box of the result.*

## Variables

- int **fl\_clip\_state\_number** = 0

### 31.74.1 Detailed Description

Drawing and clipping routines for rectangles.

## 31.74.2 Function Documentation

### 31.74.2.1 int fl\_clip\_box (int *x*, int *y*, int *w*, int *h*, int & *X*, int & *Y*, int & *W*, int & *H*)

Intersect the rectangle with the current clip region and return the bounding box of the result.

Returns non-zero if the resulting rectangle is different to the original. This can be used to limit the necessary drawing to a rectangle. *W* and *H* are set to zero if the rectangle is completely outside the region.

#### Parameters:

← *x,y,w,h* position and size of rectangle

→ *X,Y,W,H* position and size of resulting bounding box. *W* and *H* are set to zero if the rectangle is completely outside the region.

#### Returns:

Non-zero if the resulting rectangle is different to the original.

Referenced by Fl\_Text\_Display::draw(), Fl\_Pixmap::draw(), Fl\_RGB\_Image::draw(), Fl\_Bitmap::draw(), and Fl\_Double\_Window::flush().

### 31.74.2.2 Fl\_Region fl\_clip\_region ()

#### Returns:

the current clipping region.

### 31.74.2.3 void fl\_clip\_region (Fl\_Region *r*)

Replace the top of the clipping stack with a clipping region of any shape.

Fl\_Region is an operating system specific type.

#### Parameters:

← *r* clipping region

References fl\_restore\_clip().

Referenced by Fl\_Menu\_Window::flush(), Fl\_Double\_Window::flush(), and Fl\_Window::flush().

### 31.74.2.4 int fl\_not\_clipped (int *x*, int *y*, int *w*, int *h*)

Does the rectangle intersect the current clip region?

#### Parameters:

← *x,y,w,h* position and size of rectangle

#### Returns:

non-zero if any of the rectangle intersects the current clip region, If this returns 0 you don't have to draw the object.

**Note:**

Under X this returns 2 if the rectangle is partially clipped, and 1 is it is entirely inside the clip region.

Referenced by Fl\_Group::draw\_child(), and Fl\_Group::update\_child().

**31.74.2.5 void fl\_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*, int *x3*, int *y3*)**

Fill a 4-sided polygon.

The polygon must be convex.

**31.74.2.6 void fl\_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*)**

Fill a 3-sided polygon.

The polygon must be convex.

Referenced by Fl\_Scrollbar::draw(), and Fl\_Choice::draw().

**31.74.2.7 void fl\_pop\_clip ()**

Restore the previous clip region.

You must call [fl\\_pop\\_clip\(\)](#) once for every time you call [fl\\_push\\_clip\(\)](#). Unpredictable results may occur if the clip stack is not empty when you return to FLTK.

References fl\_restore\_clip(), and Fl::warning.

Referenced by Fl\_Tiled\_Image::draw(), Fl\_Text\_Display::draw(), Fl\_Tabs::draw(), Fl\_Scroll::draw(), Fl\_Progress::draw(), Fl\_Choice::draw(), Fl\_Chart::draw(), Fl\_Browser\_::draw(), Fl\_Group::draw\_children(), Fl\_Text\_Display::draw\_text(), and Fl\_Input\_::drawtext().

**31.74.2.8 void fl\_push\_clip (int *x*, int *y*, int *w*, int *h*)**

Intersect the current clip region with a rectangle and push this new region onto the stack.

**Parameters:**

← *x,y,w,h* position and size

References fl\_restore\_clip(), and Fl::warning.

Referenced by Fl\_Text\_Display::draw(), Fl\_Tabs::draw(), Fl\_Chart::draw(), Fl\_Browser\_::draw(), Fl\_Group::draw\_children(), Fl\_Text\_Display::draw\_text(), and Fl\_Input\_::drawtext().

## 31.75 Fl\_Repeat\_Button.H File Reference

[Fl\\_Repeat\\_Button](#) widget .

```
#include "Fl.H"
#include "Fl_Button.H"
```

### Classes

- class [Fl\\_Repeat\\_Button](#)

*The [Fl\\_Repeat\\_Button](#) is a subclass of [Fl\\_Button](#) that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down.*

### 31.75.1 Detailed Description

[Fl\\_Repeat\\_Button](#) widget .

## 31.76 Fl\_Return\_Button.H File Reference

[Fl\\_Return\\_Button](#) widget .

```
#include "Fl_Button.H"
```

### Classes

- class [Fl\\_Return\\_Button](#)

The [Fl\\_Return\\_Button](#) is a subclass of [Fl\\_Button](#) that generates a callback when it is pressed or when the user presses the Enter key.

### 31.76.1 Detailed Description

[Fl\\_Return\\_Button](#) widget .

## 31.77 Fl\_Roller.H File Reference

[Fl\\_Roller](#) widget .

```
#include "Fl_Valuator.H"
```

### Classes

- class [Fl\\_Roller](#)

The [Fl\\_Roller](#) widget is a "dolly" control commonly used to move 3D objects.

### 31.77.1 Detailed Description

[Fl\\_Roller](#) widget .

## 31.78 Fl\_Round\_Button.H File Reference

[Fl\\_Round\\_Button](#) widget .

```
#include "Fl_Light_Button.H"
```

### Classes

- class [Fl\\_Round\\_Button](#)

*Buttons generate callbacks when they are clicked by the user.*

### 31.78.1 Detailed Description

[Fl\\_Round\\_Button](#) widget .

## 31.79 Fl\_Round\_Clock.H File Reference

[Fl\\_Round\\_Clock](#) widget .

```
#include "Fl_Clock.H"
```

### Classes

- class [Fl\\_Round\\_Clock](#)

*A clock widget of type FL\_ROUND\_CLOCK.*

### 31.79.1 Detailed Description

[Fl\\_Round\\_Clock](#) widget .

## 31.80 Fl\_Scroll.H File Reference

[Fl\\_Scroll](#) widget .

```
#include "Fl_Group.H"
#include "Fl_Scrollbar.H"
```

### Classes

- class [Fl\\_Scroll](#)

*This container widget lets you maneuver around a set of widgets much larger than your window.*

### 31.80.1 Detailed Description

[Fl\\_Scroll](#) widget .

## 31.81 Fl\_Scrollbar.H File Reference

[Fl\\_Scrollbar](#) widget .

```
#include "Fl_Slider.H"
```

### Classes

- class [Fl\\_Scrollbar](#)

*The [Fl\\_Scrollbar](#) widget displays a slider with arrow buttons at the ends of the scrollbar.*

### 31.81.1 Detailed Description

[Fl\\_Scrollbar](#) widget .

## 31.82 Fl\_Secret\_Input.H File Reference

```
Fl_Secret_Input widget .  
#include "Fl_Input.h"
```

### Classes

- class [Fl\\_Secret\\_Input](#)

The [Fl\\_Secret\\_Input](#) class is a subclass of [Fl\\_Input](#) that displays its input as a string of asterisks.

### 31.82.1 Detailed Description

```
Fl_Secret_Input widget .
```

## 31.83 Fl\_Select\_Browser.H File Reference

[Fl\\_Select\\_Browser](#) widget .

```
#include "Fl_Browser.H"
```

### Classes

- class [Fl\\_Select\\_Browser](#)

*The class is a subclass of [Fl\\_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.*

### 31.83.1 Detailed Description

[Fl\\_Select\\_Browser](#) widget .

## 31.84 Fl\_Shared\_Image.H File Reference

[Fl\\_Shared\\_Image](#) class .

```
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_Shared\\_Image](#)

*This class supports caching, loading, and drawing of image files.*

### Typedefs

- typedef [Fl\\_Image](#) \*(\*[Fl\\_Shared\\_Handler](#) )(const char \*name, [uchar](#) \*header, int headerlen)

### Functions

- [FL\\_EXPORT void fl\\_register\\_images\(\)](#)

#### 31.84.1 Detailed Description

[Fl\\_Shared\\_Image](#) class .

## 31.85 Fl\_Simple\_Counter.H File Reference

[Fl\\_Simple\\_Counter](#) widget .

```
#include "Fl_Counter.H"
```

### Classes

- class [Fl\\_Simple\\_Counter](#)

*This widget creates a counter with only 2 arrow buttons.*

### 31.85.1 Detailed Description

[Fl\\_Simple\\_Counter](#) widget .

## 31.86 Fl\_Single\_Window.H File Reference

[Fl\\_Single\\_Window](#) class .

```
#include "Fl_Window.H"
```

### Classes

- class [Fl\\_Single\\_Window](#)

*This is the same as [Fl\\_Window](#).*

### 31.86.1 Detailed Description

[Fl\\_Single\\_Window](#) class .

## 31.87 Fl\_Slider.H File Reference

[Fl\\_Slider](#) widget .

```
#include "Fl_Valuator.H"
```

### Classes

- class [Fl\\_Slider](#)

*The [Fl\\_Slider](#) widget contains a sliding knob inside a box.*

### Defines

- #define **FL\_VERT\_SLIDER** 0
- #define **FL\_HOR\_SLIDER** 1
- #define **FL\_VERT\_FILL\_SLIDER** 2
- #define **FL\_HOR\_FILL\_SLIDER** 3
- #define **FL\_VERT\_NICE\_SLIDER** 4
- #define **FL\_HOR\_NICE\_SLIDER** 5

### 31.87.1 Detailed Description

[Fl\\_Slider](#) widget .

## 31.88 Fl\_Spinner.H File Reference

[Fl\\_Spinner](#) widget .

```
#include <FL/Enumerations.H>
#include <FL/Fl_Group.H>
#include <FL/Fl_Input.H>
#include <FL/Fl_Repeat_Button.H>
#include <stdio.h>
#include <stdlib.h>
```

### Classes

- class [Fl\\_Spinner](#)

*This widget is a combination of the input widget and repeat buttons.*

### 31.88.1 Detailed Description

[Fl\\_Spinner](#) widget .

## 31.89 Fl\_Tabs.H File Reference

Fl\_Tabs widget .

```
#include "Fl_Group.H"
```

### Classes

- class [Fl\\_Tabs](#)

The [Fl\\_Tabs](#) widget is the "file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits.

### 31.89.1 Detailed Description

Fl\_Tabs widget .

## 31.90 Fl\_Text\_Buffer.H File Reference

[Fl\\_Text\\_Buffer](#), [Fl\\_Text\\_Selection](#) widget .

```
#include "Fl_Export.h"
```

### Classes

- class [Fl\\_Text\\_Selection](#)

*This is an internal class for [Fl\\_Text\\_Buffer](#) to manage text selections.*

- class [Fl\\_Text\\_Buffer](#)

*The [Fl\\_Text\\_Buffer](#) class is used by the [Fl\\_Text\\_Display](#) and [Fl\\_Text\\_Editor](#) to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.*

### Defines

- #define **FL\_TEXT\_MAX\_EXP\_CHAR\_LEN** 20

### Typedefs

- typedef void(\* **Fl\_Text\_Modify\_Cb** )(int pos, int nInserted, int nDeleted, int nRestyled, const char \*deletedText, void \*cbArg)
- typedef void(\* **Fl\_Text\_Predelete\_Cb** )(int pos, int nDeleted, void \*cbArg)

### 31.90.1 Detailed Description

[Fl\\_Text\\_Buffer](#), [Fl\\_Text\\_Selection](#) widget .

## 31.91 Fl\_Text\_Display.H File Reference

[Fl\\_Text\\_Display](#) widget .

```
#include "fl_draw.H"
#include "Fl_Group.H"
#include "Fl_Widget.H"
#include "Fl_Scrollbar.H"
#include "Fl_Text_Buffer.H"
```

### Classes

- class [Fl\\_Text\\_Display](#)  
*This is the FLTK text display widget.*
- struct [Fl\\_Text\\_Display::Style\\_Table\\_Entry](#)  
*This structure associates the color,font,size of a string to draw with an attribute mask matching attr.*

### 31.91.1 Detailed Description

[Fl\\_Text\\_Display](#) widget .

## 31.92 Fl\_Text\_Editor.H File Reference

[Fl\\_Text\\_Editor](#) widget .  
#include "Fl\_Text\_Display.H"

### Classes

- class [Fl\\_Text\\_Editor](#)  
*This is the FLTK text editor widget.*
- struct [Fl\\_Text\\_Editor::Key\\_Binding](#)  
*Simple linked list associating a key/state to a function.*

### Defines

- #define **FL\_TEXT\_EDITOR\_ANY\_STATE** (-1L)

### 31.92.1 Detailed Description

[Fl\\_Text\\_Editor](#) widget .

## 31.93 Fl\_Tile.H File Reference

[Fl\\_Tile](#) widget .

```
#include "Fl_Group.H"
```

### Classes

- class [Fl\\_Tile](#)

*The [Fl\\_Tile](#) class lets you resize the children by dragging the border between them:.*

### 31.93.1 Detailed Description

[Fl\\_Tile](#) widget .

## 31.94 Fl\_Tiled\_Image.H File Reference

```
Fl_Tiled_Image widget .  
#include "Fl_Image.H"
```

### Classes

- class [Fl\\_Tiled\\_Image](#)  
*This class supports tiling of images over a specified area.*

#### 31.94.1 Detailed Description

[Fl\\_Tiled\\_Image](#) widget .

## 31.95 Fl\_Timer.H File Reference

[Fl\\_Timer](#) widget .

```
#include "Fl_Widget.H"
```

### Classes

- class [Fl\\_Timer](#)

*This is provided only to emulate the Forms Timer widget.*

### Defines

- #define **FL\_NORMAL\_TIMER** 0
- #define **FL\_VALUE\_TIMER** 1
- #define **FL\_HIDDEN\_TIMER** 2

### 31.95.1 Detailed Description

[Fl\\_Timer](#) widget .

## 31.96 Fl\_Toggle\_Button.H File Reference

[Fl\\_Toggle\\_Button](#) widget .

```
#include "Fl_Button.H"
```

### Classes

- class [Fl\\_Toggle\\_Button](#)

*The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off.*

### 31.96.1 Detailed Description

[Fl\\_Toggle\\_Button](#) widget .

## 31.97 Fl\_Tooltip.H File Reference

[Fl\\_Tooltip](#) widget .

```
#include <FL/Fl.H>
#include <FL/Fl_Widget.H>
```

### Classes

- class [Fl\\_Tooltip](#)

The [Fl\\_Tooltip](#) class provides tooltip support for all FLTK widgets.

### 31.97.1 Detailed Description

[Fl\\_Tooltip](#) widget .

## 31.98 fl\_types.h File Reference

This file contains simple "C"-style type definitions.

### Typedefs

#### Miscellaneous

- `typedef unsigned char uchar`  
*unsigned char*
- `typedef unsigned long ulong`  
*unsigned long*
- `typedef char * Fl_String`  
*Flexible length utf8 Unicode text.*
- `typedef const char * Fl_CString`  
*Flexible length utf8 Unicode read-only string.*
- `typedef unsigned int Fl_Unichar`  
*24-bit Unicode character + 8-bit indicator for keyboard flags*

### 31.98.1 Detailed Description

This file contains simple "C"-style type definitions.

### 31.98.2 Typedef Documentation

#### 31.98.2.1 `typedef const char* Fl_CString`

Flexible length utf8 Unicode read-only string.

See also:

[Fl\\_String](#)

#### 31.98.2.2 `typedef char* Fl_String`

Flexible length utf8 Unicode text.

#### Todo

FIXME: temporary (?) typedef to mark UTF8 and Unicode conversions

## 31.99 Fl\_Valuator.H File Reference

[Fl\\_Valuator](#) widget .

```
#include "Fl_Widget.H"
```

### Classes

- class [Fl\\_Valuator](#)

*The [Fl\\_Valuator](#) class controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object.*

### Defines

- #define [FL\\_VERTICAL](#) 0  
*The valuator can work vertically.*
- #define [FL\\_HORIZONTAL](#) 1  
*The valuator can work horizontally.*

### 31.99.1 Detailed Description

[Fl\\_Valuator](#) widget .

## 31.100 Fl\_Value\_Input.H File Reference

[Fl\\_Value\\_Input](#) widget .

```
#include "Fl_Valuator.H"
#include "Fl_Input.H"
```

### Classes

- class [Fl\\_Value\\_Input](#)  
*The [Fl\\_Value\\_Input](#) widget displays a numeric value.*

#### 31.100.1 Detailed Description

[Fl\\_Value\\_Input](#) widget .

## 31.101 Fl\_Value\_Output.H File Reference

[Fl\\_Value\\_Output](#) widget .  
`#include "Fl_Valuator.H"`

### Classes

- class [Fl\\_Value\\_Output](#)

*The [Fl\\_Value\\_Output](#) widget displays a floating point value.*

### 31.101.1 Detailed Description

[Fl\\_Value\\_Output](#) widget .

## 31.102 Fl\_Value\_Slider.H File Reference

[Fl\\_Value\\_Slider](#) widget .  
#include "Fl\_Slider.H"

### Classes

- class [Fl\\_Value\\_Slider](#)

The [Fl\\_Value\\_Slider](#) widget is a [Fl\\_Slider](#) widget with a box displaying the current value.

### 31.102.1 Detailed Description

[Fl\\_Value\\_Slider](#) widget .

## 31.103 fl\_vertex.cxx File Reference

Portable drawing code for drawing arbitrary shapes with simple 2D transformations.

```
#include <config.h>
#include <FL/fl_draw.H>
#include <FL/x.H>
#include <FL/Fl.H>
#include <FL/math.h>
#include <stdlib.h>
```

### Defines

- #define **XPOINT** XPoint

### Typedefs

- typedef short **COORD\_T**

### Enumerations

- enum { **LINE**, **LOOP**, **POLYGON**, **POINT\_** }

### Functions

- void **fl\_push\_matrix** ()  
*Save the current transformation matrix on the stack.*
- void **fl\_pop\_matrix** ()  
*Restore the current transformation matrix from the stack.*
- void **fl\_mult\_matrix** (double a, double b, double c, double d, double x, double y)  
*Concatenate another transformation onto the current one.*
- void **fl\_scale** (double x, double y)  
*Concatenate scaling transformation onto the current one.*
- void **fl\_scale** (double x)  
*Concatenate scaling transformation onto the current one.*
- void **fl\_translate** (double x, double y)  
*Concatenate translation transformation onto the current one.*
- void **fl\_rotate** (double d)  
*Concatenate rotation transformation onto the current one.*
- void **fl\_begin\_points** ()

*Start drawing a list of points.*

- void `fl_begin_line()`

*Start drawing a list of lines.*

- void `fl_begin_loop()`

*Start drawing a closed sequence of lines.*

- void `fl_begin_polygon()`

*Start drawing a convex filled polygon.*

- double `fl_transform_x(double x, double y)`

*Transform coordinate using current transformation matrix.*

- double `fl_transform_y(double x, double y)`

*Transform coordinate using current transformation matrix.*

- double `fl_transform_dx(double x, double y)`

*Transform distance using current transformation matrix.*

- double `fl_transform_dy(double x, double y)`

*Transform distance using current transformation matrix.*

- void `fl_transformed_vertex(double xf, double yf)`

*Add coordinate pair to the vertex list without further transformations.*

- void `fl_vertex(double x, double y)`

*Add a single vertex to the current path.*

- void `fl_end_points()`

*End list of points, and draw.*

- void `fl_end_line()`

*End list of lines, and draw.*

- void `fl_end_loop()`

*End closed sequence of lines, and draw.*

- void `fl_end_polygon()`

*End convex filled polygon, and draw.*

- void `fl_begin_complex_polygon()`

*Start drawing a complex filled polygon.*

- void `fl_gap()`

*Call `fl_gap()` to separate loops of the path.*

- void `fl_end_complex_polygon()`

*End complex filled polygon, and draw.*

- void [fl\\_circle](#) (double x, double y, double r)  
*fl\_circle()* is equivalent to [fl\\_arc](#).

### 31.103.1 Detailed Description

Portable drawing code for drawing arbitrary shapes with simple 2D transformations.

### 31.103.2 Function Documentation

#### 31.103.2.1 void [fl\\_begin\\_complex\\_polygon](#) ()

Start drawing a complex filled polygon.

The polygon may be concave, may have holes in it, or may be several disconnected pieces. Call [fl\\_gap\(\)](#) to separate loops of the path.

To outline the polygon, use [fl\\_begin\\_loop\(\)](#) and replace each [fl\\_gap\(\)](#) with [fl\\_end\\_loop\(\);fl\\_begin\\_loop\(\)](#) pairs.

**Note:**

For portability, you should only draw polygons that appear the same whether "even/odd" or "non-zero" winding rules are used to fill them. Holes should be drawn in the opposite direction to the outside loop.

References [fl\\_begin\\_polygon\(\)](#).

Referenced by [Fl\\_File\\_Icon::draw\(\)](#).

#### 31.103.2.2 void [fl\\_begin\\_points](#) ()

Start drawing a list of points.

Points are added to the list with [fl\\_vertex\(\)](#)

#### 31.103.2.3 void [fl\\_circle](#) (double x, double y, double r)

[fl\\_circle\(\)](#) is equivalent to [fl\\_arc](#).

...0,360) but may be faster. It must be the *only* thing in the path: if you want a circle as part of a complex polygon you must use [fl\\_arc\(\)](#)

**Parameters:**

← *x,y,r* center and radius of circle

References [fl\\_transform\\_x\(\)](#), and [fl\\_transform\\_y\(\)](#).

Referenced by [Fl\\_Dial::draw\(\)](#), and [Fl\\_Clock\\_Output::draw\(\)](#).

#### 31.103.2.4 void [fl\\_gap](#) ()

Call [fl\\_gap\(\)](#) to separate loops of the path.

It is unnecessary but harmless to call `fl_gap()` before the first vertex, after the last vertex, or several times in a row.

References `fl_transformed_vertex()`.

Referenced by `fl_end_complex_polygon()`.

### **31.103.2.5 void fl\_mult\_matrix (double *a*, double *b*, double *c*, double *d*, double *x*, double *y*)**

Concatenate another transformation onto the current one.

**Parameters:**

$\leftarrow a, b, c, d, x, y$  transformation matrix elements such that  $X' = aX + cY + x$  and  $Y' = bX + dY + y$

Referenced by `fl_rotate()`, `fl_scale()`, and `fl_translate()`.

### **31.103.2.6 void fl\_push\_matrix ()**

Save the current transformation matrix on the stack.

The maximum depth of the stack is 4.

References `Fl::error`.

Referenced by `Fl_File_Icon::draw()`, `Fl_Dial::draw()`, and `Fl_Clock_Output::draw()`.

### **31.103.2.7 void fl\_rotate (double *d*)**

Concatenate rotation transformation onto the current one.

**Parameters:**

$\leftarrow d$  - rotation angle, counter-clockwise in degrees (not radians)

References `fl_mult_matrix()`.

Referenced by `Fl_Dial::draw()`, and `Fl_Clock_Output::draw()`.

### **31.103.2.8 void fl\_scale (double *x*)**

Concatenate scaling transformation onto the current one.

**Parameters:**

$\leftarrow x$  scale factor in both x-direction and y-direction

References `fl_mult_matrix()`.

### **31.103.2.9 void fl\_scale (double *x*, double *y*)**

Concatenate scaling transformation onto the current one.

**Parameters:**

←  $x,y$  scale factors in x-direction and y-direction

References fl\_mult\_matrix().

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and Fl\_Clock\_Output::draw().

**31.103.2.10 double fl\_transform\_dx (double x, double y)**

Transform distance using current transformation matrix.

**Parameters:**

←  $x,y$  coordinate

Referenced by fl\_arc().

**31.103.2.11 double fl\_transform\_dy (double x, double y)**

Transform distance using current transformation matrix.

**Parameters:**

←  $x,y$  coordinate

Referenced by fl\_arc().

**31.103.2.12 double fl\_transform\_x (double x, double y)**

Transform coordinate using current transformation matrix.

**Parameters:**

←  $x,y$  coordinate

Referenced by fl\_circle(), and fl\_curve().

**31.103.2.13 double fl\_transform\_y (double x, double y)**

Transform coordinate using current transformation matrix.

**Parameters:**

←  $x,y$  coordinate

Referenced by fl\_circle(), and fl\_curve().

**31.103.2.14 void fl\_transformed\_vertex (double xf, double yf)**

Add coordinate pair to the vertex list without further transformations.

**Parameters:**

← *xf,yf* transformed coordinate

References fl\_transformed\_vertex().

Referenced by fl\_curve(), fl\_end\_loop(), fl\_gap(), fl\_transformed\_vertex(), and fl\_vertex().

**31.103.2.15 void fl\_translate (double x, double y)**

Concatenate translation transformation onto the current one.

**Parameters:**

← *x,y* translation factor in x-direction and y-direction

References fl\_mult\_matrix().

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and Fl\_Clock\_Output::draw().

**31.103.2.16 void fl\_vertex (double x, double y)**

Add a single vertex to the current path.

**Parameters:**

← *x,y* coordinate

References fl\_transformed\_vertex().

Referenced by Fl\_File\_Icon::draw(), Fl\_Dial::draw(), and fl\_arc().

## 31.104 Fl\_Widget.H File Reference

[Fl\\_Widget](#), [Fl\\_Label](#) classes .

```
#include "Enumerations.H"
```

### Classes

- struct [Fl\\_Label](#)

*This struct stores all information for a text or mixed graphics label.*

- class [Fl\\_Widget](#)

*Fl\_Widget is the base class for all widgets in FLTK.*

### Defines

- #define [FL\\_RESERVED\\_TYPE](#) 100

*Reserved type numbers (necessary for my cheapo RTTI) start here.*

### Typedefs

- typedef void( [Fl\\_Callback](#) )([Fl\\_Widget](#) \*, void \*)

*Default callback type definition for all fltk widgets (by far the most used).*

- typedef [Fl\\_Callback](#) \* [Fl\\_Callback\\_p](#)

*Default callback type pointer definition for all fltk widgets.*

- typedef void( [Fl\\_Callback0](#) )([Fl\\_Widget](#) \*)

*One parameter Callback type definition passing only the widget.*

- typedef void( [Fl\\_Callback1](#) )([Fl\\_Widget](#) \*, long)

*Callback type definition passing the widget and a long data value.*

### 31.104.1 Detailed Description

[Fl\\_Widget](#), [Fl\\_Label](#) classes .

### 31.104.2 Define Documentation

#### 31.104.2.1 #define FL\_RESERVED\_TYPE 100

Reserved type numbers (necessary for my cheapo RTTI) start here.

grep the header files for "RESERVED\_TYPE" to find the next available number.

## 31.105 Fl\_Window.H File Reference

[Fl\\_Window](#) widget .

```
#include "Fl_Group.H"
```

### Classes

- class [Fl\\_Window](#)

*This widget produces an actual window.*

### Defines

- #define [FL\\_WINDOW](#) 0xF0  
*window type id all subclasses have type() >= this*
- #define [FL\\_DOUBLE\\_WINDOW](#) 0xF1  
*double window type id*

### 31.105.1 Detailed Description

[Fl\\_Window](#) widget .

## 31.106 Fl\_Wizard.H File Reference

[Fl\\_Wizard](#) widget .

```
#include <FL/Fl_Group.H>
```

### Classes

- class [Fl\\_Wizard](#)

*This widget is based off the [Fl\\_Tabs](#) widget, but instead of displaying tabs it only changes "tabs" under program control.*

### 31.106.1 Detailed Description

[Fl\\_Wizard](#) widget .

## 31.107 Fl\_XBM\_Image.H File Reference

[Fl\\_XBM\\_Image](#) class .

```
#include "Fl_Bitmap.H"
```

### Classes

- class [Fl\\_XBM\\_Image](#)

The [Fl\\_XBM\\_Image](#) class supports loading, caching, and drawing of X Bitmap (XBM) bitmap files.

### 31.107.1 Detailed Description

[Fl\\_XBM\\_Image](#) class .

## 31.108 Fl\_XPM\_Image.H File Reference

[Fl\\_XPM\\_Image](#) class .

```
#include "Fl_Pixmap.h"
```

### Classes

- class [Fl\\_XPM\\_Image](#)

The [Fl\\_XPM\\_Image](#) class supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency.

### 31.108.1 Detailed Description

[Fl\\_XPM\\_Image](#) class .

# Index

~Fl\_Browser  
    Fl\_Browser, 276  
~Fl\_Check\_Browser  
    Fl\_Check\_Browser, 310  
~Fl\_Double\_Window  
    Fl\_Double\_Window, 340  
~Fl\_File\_Chooser  
    Fl\_File\_Chooser, 351  
~Fl\_Group  
    Fl\_Group, 394  
~Fl\_Help\_View  
    Fl\_Help\_View, 410  
~Fl\_Menu\_Window  
    Fl\_Menu\_Window, 476  
~Fl\_Preferences  
    Fl\_Preferences, 502  
~Fl\_RGB\_Image  
    Fl\_RGB\_Image, 524  
~Fl\_Scrollbar  
    Fl\_Scrollbar, 539  
~Fl\_Shared\_Image  
    Fl\_Shared\_Image, 546  
~Fl\_Text\_Display  
    Fl\_Text\_Display, 594  
~Fl\_Widget  
    Fl\_Widget, 661  
~Fl\_Window  
    Fl\_Window, 695  
\_FL\_DIAMOND\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_DIAMOND\_UP\_BOX  
    Enumerations.H, 714  
\_FL\_EMBOSSDED\_LABEL  
    Enumerations.H, 717  
\_FL\_ENGRAVED\_LABEL  
    Enumerations.H, 717  
\_FL\_GTK\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_GTK\_DOWN\_FRAME  
    Enumerations.H, 714  
\_FL\_GTK\_ROUND\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_GTK\_ROUND\_UP\_BOX  
    Enumerations.H, 714  
\_FL\_GTK\_THIN\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_GTK\_THIN\_UP\_FRAME  
    Enumerations.H, 714  
\_FL\_ICON\_LABEL  
    Enumerations.H, 718  
\_FL\_IMAGE\_LABEL  
    Enumerations.H, 718  
\_FL\_MULTI\_LABEL  
    Enumerations.H, 718  
\_FL\_OFLAT\_BOX  
    Enumerations.H, 714  
\_FL\_OSHADOW\_BOX  
    Enumerations.H, 714  
\_FL\_OVAL\_BOX  
    Enumerations.H, 714  
\_FL\_OVAL\_FRAME  
    Enumerations.H, 714  
\_FL\_PLASTIC\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_PLASTIC\_DOWN\_FRAME  
    Enumerations.H, 714  
\_FL\_PLASTIC\_ROUND\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_PLASTIC\_ROUND\_UP\_BOX  
    Enumerations.H, 714  
\_FL\_PLASTIC\_THIN\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_PLASTIC\_THIN\_UP\_BOX  
    Enumerations.H, 714  
\_FL\_PLASTIC\_UP\_BOX  
    Enumerations.H, 714  
\_FL\_PLASTIC\_UP\_FRAME  
    Enumerations.H, 714  
\_FL\_RFLAT\_BOX  
    Enumerations.H, 714  
\_FL\_ROUNDED\_BOX  
    Enumerations.H, 714

\_FL\_ROUNDED\_FRAME  
    Enumerations.H, 714  
\_FL\_ROUND\_DOWN\_BOX  
    Enumerations.H, 714  
\_FL\_ROUND\_UP\_BOX  
    Enumerations.H, 714  
\_FL\_RSHADOW\_BOX  
    Enumerations.H, 714  
\_FL\_SHADOW\_BOX  
    Enumerations.H, 713  
\_FL\_SHADOW\_FRAME  
    Enumerations.H, 714  
\_FL\_SHADOW\_LABEL  
    Enumerations.H, 717  
\_remove  
    Fl\_Browser, 276  
  
activate  
    Fl\_Menu\_Item, 467  
    Fl\_Widget, 662  
active  
    Fl\_Menu\_Item, 467  
    Fl\_Widget, 662  
active\_r  
    Fl\_Widget, 662  
activevisible  
    Fl\_Menu\_Item, 468  
add  
    Fl\_Browser, 276  
    Fl\_Chart, 304  
    Fl\_Check\_Browser, 311  
    Fl\_File\_Icon, 359  
    Fl\_Input\_Choice, 437  
    Fl\_Menu\_, 450  
    Fl\_Menu\_Item, 468  
add\_awake\_handler\_  
    Fl, 249  
add\_check  
    Fl, 249  
add\_color  
    Fl\_File\_Icon, 359  
add\_default\_key\_bindings  
    Fl\_Text\_Editor, 611  
add\_extra  
    Fl\_File\_Chooser, 352  
add\_fd  
    Fl, 250  
add\_handler  
    fl\_events, 206  
add\_idle  
    Fl, 250  
add\_modify\_callback  
    Fl\_Text\_Buffer, 574  
add\_pdelete\_callback

    Fl\_Text\_Buffer, 574  
add\_timeout  
    Fl, 250  
add\_vertex  
    Fl\_File\_Icon, 359  
align  
    Fl\_Widget, 663  
angle1  
    Fl\_Dial, 337  
append  
    Fl\_Text\_Buffer, 574  
appendfile  
    Fl\_Text\_Buffer, 574  
arg  
    Fl, 251  
args  
    Fl, 251  
argument  
    Fl\_Menu\_Item, 468  
    Fl\_Widget, 663  
array  
    Fl\_Group, 394  
atclose  
    fl\_windows, 203  
autosize  
    Fl\_Chart, 304, 305  
awake  
    fl\_multithread, 225  
  
b  
    Fl\_Color\_Chooser, 329  
background  
    Fl, 252  
background2  
    Fl, 252  
begin  
    Fl\_Group, 394  
belowmouse  
    fl\_events, 207  
bitmap  
    Fl\_FormsBitmap, 370  
border  
    Fl\_Window, 695  
bottomline  
    Fl\_Browser, 277  
bound\_key\_function  
    Fl\_Text\_Editor, 611  
bounds  
    Fl\_Chart, 305  
    Fl\_Slider, 554  
    Fl\_Valuator, 635  
box  
    Fl\_Widget, 664  
box\_dh

Fl, 253  
 box\_dw  
     Fl, 253  
 box\_dx  
     Fl, 253  
 box\_dy  
     Fl, 254  
 buffer  
     Fl\_Text\_Display, 594  
 Cairo support functions and classes, 229  
 cairo\_autolink\_context  
     group\_cairo, 229  
 cairo\_cc  
     group\_cairo, 230  
 cairo\_make\_current  
     group\_cairo, 230  
 calc\_line\_starts  
     Fl\_Text\_Display, 594  
 callback  
     Fl\_Menu\_Item, 468  
     Fl\_Widget, 664, 665  
 can\_do  
     Fl\_Gl\_Window, 381  
 can\_do\_overlay  
     Fl\_Gl\_Window, 381  
 CHANGED  
     Fl\_Widget, 661  
 changed  
     Fl\_Input\_Choice, 437  
     Fl\_Widget, 665  
 character  
     Fl\_Text\_Buffer, 574  
 character\_width  
     Fl\_Text\_Buffer, 575  
 check  
     Fl, 254  
     Fl\_Menu\_Item, 468  
 check\_all  
     Fl\_Check\_Browser, 311  
 check\_none  
     Fl\_Check\_Browser, 311  
 checkbox  
     Fl\_Menu\_Item, 468  
 checked  
     Fl\_Check\_Browser, 311  
     Fl\_Menu\_Item, 469  
 child  
     Fl\_Group, 395  
 clamp  
     Fl\_Valuator, 636  
 clear  
     Fl\_Button, 296  
     Fl\_Check\_Browser, 311  
     Fl\_File\_Icon, 359  
     Fl\_Group, 395  
     Fl\_Input\_Choice, 437  
     Fl\_Menu\_, 451  
     Fl\_Menu\_Item, 469  
     Fl\_Scroll, 535  
 clear\_border  
     Fl\_Window, 695  
 clear\_changed  
     Fl\_Input\_Choice, 437  
     Fl\_Widget, 666  
 clear\_damage  
     Fl\_Widget, 666  
 clear\_output  
     Fl\_Widget, 666  
 clear\_overlay  
     Fl\_Menu\_Window, 476  
 clear\_rectangular  
     Fl\_Text\_Buffer, 575  
 clear\_selection  
     Fl\_Help\_View, 410  
 clear\_visible  
     Fl\_Widget, 667  
 clear\_visible\_focus  
     Fl\_Widget, 667  
 clip\_children  
     Fl\_Group, 395  
 col  
     FL\_CHART\_ENTRY, 308  
 color  
     Fl\_File\_Chooser, 352  
     Fl\_Tooltip, 630  
     Fl\_Widget, 667, 668  
 Color & Font functions, 222  
 color2  
     Fl\_Widget, 668  
 color\_average  
     Fl\_Image, 417  
     Fl\_Pixmap, 490  
     Fl\_RGB\_Image, 524  
     Fl\_Shared\_Image, 546  
     Fl\_Tiled\_Image, 623  
 column\_char  
     Fl\_Browser, 277  
 column\_widths  
     Fl\_Browser, 277  
 Common Dialogs classes and functions, 231  
 compose  
     fl\_events, 207  
 compose\_reset  
     fl\_events, 207  
 contains  
     Fl\_Widget, 668  
 context

Fl\_Gl\_Window, 381  
context\_valid  
    Fl\_Gl\_Window, 381  
COPIED\_LABEL  
    Fl\_Widget, 661  
copy  
    Fl\_Bitmap, 266  
    fl\_clipboard, 216  
    Fl\_Image, 418  
    Fl\_Input\_, 428  
    Fl\_Menu\_, 451  
    Fl\_Pixmap, 490  
    Fl\_RGB\_Image, 524, 525  
    Fl\_Shared\_Image, 547  
    Fl\_Tiled\_Image, 623  
copy\_cuts  
    Fl\_Input\_, 429  
copy\_label  
    Fl\_Widget, 669  
    Fl\_Window, 695  
count  
    Fl\_File\_Chooser, 352  
    Fl\_Image, 418  
count\_displayed\_characters  
    Fl\_Text\_Buffer, 575  
count\_lines  
    Fl\_Text\_Buffer, 575  
    Fl\_Text\_Display, 595  
current  
    Fl\_Group, 395  
    Fl\_Tooltip, 630  
    Fl\_Window, 696  
current\_  
    Fl\_Window, 702  
cursor  
    Fl\_Window, 696  
cursor\_color  
    Fl\_Input\_, 429  
    Fl\_Text\_Display, 595  
    Fl\_Value\_Input, 641  
cursor\_style  
    Fl\_Text\_Display, 595  
cut  
    Fl\_Input\_, 429  
d  
    Fl\_Image, 418  
damage  
    Fl, 254  
    Fl\_Widget, 669  
damage\_resize  
    Fl\_Widget, 670  
data  
    Fl\_Browser, 277  
Fl\_Image, 418  
deactivate  
    Fl\_Menu\_Item, 469  
Fl\_Repeat\_Button, 518  
Fl\_Widget, 670  
default\_atclose  
    fl\_windows, 202  
default\_callback  
    Fl\_Widget, 670  
default\_cursor  
    Fl\_Window, 696  
default\_key\_function  
    Fl\_Text\_Editor, 611  
deimage  
    Fl\_Widget, 671  
delay  
    Fl\_Tooltip, 630, 631  
delete\_widget  
    fl\_del\_widget, 227  
deleteEntry  
    Fl\_Preferences, 503  
deleteGroup  
    Fl\_Preferences, 503  
deleting  
    Fl\_Browser\_, 288  
desaturate  
    Fl\_Image, 418  
    Fl\_Pixmap, 490  
    Fl\_RGB\_Image, 525  
    Fl\_Shared\_Image, 547  
    Fl\_Tiled\_Image, 623  
deselect  
    Fl\_Browser\_, 288  
direction  
    Fl\_Timer, 626  
directory  
    Fl\_File\_Chooser, 352  
    Fl\_Help\_View, 410  
disable  
    Fl\_Tooltip, 631  
display  
    Fl, 254  
    Fl\_Browser\_, 288  
display\_insert  
    Fl\_Text\_Display, 595  
dnd  
    fl\_clipboard, 216  
dnd\_text\_ops  
    Fl, 255  
do\_callback  
    Fl\_Menu\_Item, 469  
    Fl\_Widget, 671, 672  
do\_widget\_deletion  
    fl\_del\_widget, 227

down\_box  
     Fl\_Button, 296  
     Fl\_File\_Input, 364  
     Fl\_Menu\_, 451  
 draw  
     Fl\_Adjuster, 263  
     Fl\_Bitmap, 267  
     Fl\_Box, 271  
     Fl\_Browser\_, 289  
     Fl\_Button, 296  
     Fl\_Chart, 305  
     Fl\_Choice, 317  
     Fl\_Clock\_Output, 325  
     Fl\_Counter, 334  
     Fl\_Dial, 337  
     Fl\_File\_Icon, 360  
     Fl\_FormsBitmap, 370  
     Fl\_FormsPixmap, 373  
     Fl\_Free, 375  
     Fl\_Gl\_Window, 381  
     Fl\_Glut\_Window, 388  
     Fl\_Group, 395  
     Fl\_Image, 418, 419  
     Fl\_Input, 423  
     Fl\_Label, 443  
     Fl\_Light\_Button, 445  
     Fl\_Menu\_Bar, 457  
     Fl\_Menu\_Button, 460  
     Fl\_Menu\_Item, 469  
     Fl\_Pack, 487  
     Fl\_Pixmap, 490  
     Fl\_Positioner, 496  
     Fl\_Progress, 516  
     Fl\_Return\_Button, 521  
     Fl\_RGB\_Image, 525  
     Fl\_Roller, 528  
     Fl\_Scroll, 535  
     Fl\_Scrollbar, 539  
     Fl\_Shared\_Image, 547  
     Fl\_Slider, 554  
     Fl\_Tabs, 564  
     Fl\_Text\_Display, 596  
     Fl\_Tiled\_Image, 624  
     Fl\_Timer, 626  
     Fl\_Value\_Input, 641  
     Fl\_Value\_Output, 647  
     Fl\_Value\_Slider, 650  
     Fl\_Widget, 672  
     Fl\_Window, 696  
 draw\_box  
     Fl\_Widget, 673  
 draw\_box\_active  
     Fl, 255  
 draw\_child  
     Fl\_Group, 396  
 draw\_children  
     Fl\_Group, 396  
 draw\_empty  
     Fl\_Image, 419  
 draw\_focus  
     Fl\_Widget, 673  
 draw\_line\_numbers  
     Fl\_Text\_Display, 596  
 draw\_outside\_label  
     Fl\_Group, 396  
 draw\_overlay  
     Fl\_Glut\_Window, 388  
 draw\_range  
     Fl\_Text\_Display, 596  
 draw\_string  
     Fl\_Text\_Display, 596  
 draw\_text  
     Fl\_Text\_Display, 596  
 drawtext  
     Fl\_Input\_, 429  
 enable  
     Fl\_Tooltip, 631  
 enabled  
     Fl\_Tooltip, 631  
 end  
     Fl\_Group, 396  
 enter\_area  
     Fl\_Tooltip, 631  
 entries  
     Fl\_Preferences, 503  
 entry  
     Fl\_Preferences, 503  
 entryExists  
     Fl\_Preferences, 504  
 Enumerations.H, 707  
     \_FL\_DIAMOND\_DOWN\_BOX, 714  
     \_FL\_DIAMOND\_UP\_BOX, 714  
     \_FL\_EMBORESSED\_LABEL, 717  
     \_FL\_ENGRAVED\_LABEL, 717  
     \_FL\_GTK\_DOWN\_BOX, 714  
     \_FL\_GTK\_DOWN\_FRAME, 714  
     \_FL\_GTK\_ROUND\_DOWN\_BOX, 714  
     \_FL\_GTK\_ROUND\_UP\_BOX, 714  
     \_FL\_GTK\_THIN\_DOWN\_BOX, 714  
     \_FL\_GTK\_THIN\_DOWN\_FRAME, 714  
     \_FL\_GTK\_THIN\_UP\_BOX, 714  
     \_FL\_GTK\_THIN\_UP\_FRAME, 714  
     \_FL\_GTK\_UP\_BOX, 714  
     \_FL\_GTK\_UP\_FRAME, 714  
     \_FL\_ICON\_LABEL, 718  
     \_FL\_IMAGE\_LABEL, 718  
     \_FL\_MULTI\_LABEL, 718

\_FL\_OFLAT\_BOX, 714  
\_FL\_OSHADOW\_BOX, 714  
\_FL\_OVAL\_BOX, 714  
\_FL\_OVAL\_FRAME, 714  
\_FL\_PLASTIC\_DOWN\_BOX, 714  
\_FL\_PLASTIC\_DOWN\_FRAME, 714  
\_FL\_PLASTIC\_ROUND\_DOWN\_BOX, 714  
\_FL\_PLASTIC\_ROUND\_UP\_BOX, 714  
\_FL\_PLASTIC\_THIN\_DOWN\_BOX, 714  
\_FL\_PLASTIC\_THIN\_UP\_BOX, 714  
\_FL\_PLASTIC\_UP\_BOX, 714  
\_FL\_PLASTIC\_UP\_FRAME, 714  
\_FL\_RFLAT\_BOX, 714  
\_FL\_ROUNDED\_BOX, 714  
\_FL\_ROUNDED\_FRAME, 714  
\_FL\_ROUND\_DOWN\_BOX, 714  
\_FL\_ROUND\_UP\_BOX, 714  
\_FL\_RSHADOW\_BOX, 714  
\_FL\_SHADOW\_BOX, 713  
\_FL\_SHADOW\_FRAME, 714  
\_FL\_SHADOW\_LABEL, 717  
FL\_ACTIVATE, 716  
FL\_BACKGROUND2\_COLOR, 715  
FL\_BORDER\_BOX, 713  
FL\_BORDER\_FRAME, 713  
FL\_CLOSE, 716  
FL\_DEACTIVATE, 716  
FL\_DND\_DRAG, 717  
FL\_DND\_ENTER, 717  
FL\_DND\_LEAVE, 717  
FL\_DND\_RELEASE, 717  
FL\_DOWN\_BOX, 713  
FL\_DOWN\_FRAME, 713  
FL\_DRAG, 715  
FL\_EMBOSSSED\_BOX, 713  
FL\_EMBOSSSED\_FRAME, 713  
FL\_ENGRAVED\_BOX, 713  
FL\_ENGRAVED\_FRAME, 713  
FL\_ENTER, 715  
FL\_FLAT\_BOX, 713  
FL\_FOCUS, 715  
FL\_FOREGROUND\_COLOR, 715  
FL\_FREE\_BOXTYPE, 714  
FL\_FREELABELTYPE, 718  
FL\_HIDE, 716  
FL\_INACTIVE\_COLOR, 715  
FL\_KEYBOARD, 716  
FL\_KEYDOWN, 716  
FL\_KEYUP, 716  
FL\_LEAVE, 715  
FL\_MOUSEWHEEL, 717  
FL\_MOVE, 716  
FL\_NO\_BOX, 713  
FL\_NO\_EVENT, 715  
FL\_NO\_LABEL, 717  
FL\_NORMAL\_LABEL, 717  
FL\_PASTE, 717  
FL\_PUSH, 715  
FL\_RELEASE, 715  
FL\_SELECTION\_COLOR, 715  
FL\_SELECTIONCLEAR, 717  
FL\_SHORTCUT, 716  
FL\_SHOW, 717  
FL\_THIN\_DOWN\_BOX, 713  
FL\_THIN\_DOWN\_FRAME, 713  
FL\_THIN\_UP\_BOX, 713  
FL\_THIN\_UP\_FRAME, 713  
FL\_UNFOCUS, 716  
FL\_UP\_BOX, 713  
FL\_UP\_FRAME, 713  
FL\_WHEN\_CHANGED, 718  
FL\_WHEN\_ENTER\_KEY, 718  
FL\_WHEN\_ENTER\_KEY\_ALWAYS, 718  
FL\_WHEN\_ENTER\_KEY\_CHANGED, 718  
FL\_WHEN\_NEVER, 718  
FL\_WHEN\_NOT\_CHANGED, 718  
FL\_WHEN\_RELEASE, 718  
FL\_WHEN\_RELEASE\_ALWAYS, 718  
FL\_Align, 713  
FL\_ALIGN\_BOTTOM, 718  
FL\_ALIGN\_CENTER, 718  
FL\_ALIGN\_CLIP, 718  
FL\_ALIGN\_IMAGE\_OVER\_TEXT, 719  
FL\_ALIGN\_INSIDE, 719  
FL\_ALIGN\_LEFT, 719  
FL\_ALIGN\_RIGHT, 719  
FL\_ALIGN\_TEXT\_OVER\_IMAGE, 719  
FL\_ALIGN\_TOP, 719  
FL\_ALIGN\_WRAP, 720  
Fl\_Boxtype, 713  
Fl\_Color, 714  
Fl\_Event, 715  
Fl\_Font, 713  
Fl\_Fontsize, 713  
Fl\_Labeltype, 717  
FL\_MAJOR\_VERSION, 712  
FL\_MINOR\_VERSION, 712  
FL\_PATCH\_VERSION, 712  
FL\_VERSION, 712  
Fl\_When, 718  
error  
    group\_comdlg, 237  
errorcolor  
    Fl\_File\_Input, 364  
event  
    fl\_events, 208  
event\_alt  
    fl\_events, 208

event\_button  
     fl\_events, 208  
 event\_button1  
     fl\_events, 208  
 event\_button2  
     fl\_events, 208  
 event\_button3  
     fl\_events, 209  
 event\_buttons  
     fl\_events, 209  
 event\_clicks  
     fl\_events, 209  
 event\_ctrl  
     fl\_events, 209  
 event\_dx  
     fl\_events, 210  
 event\_dy  
     fl\_events, 210  
 event\_inside  
     fl\_events, 210  
 event\_is\_click  
     fl\_events, 210  
 event\_key  
     fl\_events, 210, 211  
 event\_length  
     fl\_events, 211  
 event\_original\_key  
     fl\_events, 212  
 event\_shift  
     fl\_events, 212  
 event\_state  
     fl\_events, 212  
 event\_text  
     fl\_events, 212  
 event\_x\_root  
     fl\_events, 213  
 event\_y\_root  
     fl\_events, 213  
 Events handling functions, 204  
 expand\_character  
     Fl\_Text\_Buffer, 575, 576  
  
 fatal  
     group\_comdlg, 237  
 filename  
     Fl\_Help\_View, 410  
 filetype  
     Fl\_File\_Browser, 344  
 filter  
     Fl\_File\_Browser, 344  
     Fl\_File\_Chooser, 352  
 filter\_value  
     Fl\_File\_Chooser, 353  
 find  
     Fl\_File\_Icon, 360  
     Fl\_Group, 396  
 find\_item  
     Fl\_Browser\_, 289  
     Fl\_Menu\_, 451  
 find\_line\_end  
     Fl\_Text\_Display, 597  
 find\_shortcut  
     Fl\_Menu\_Item, 470  
 find\_wrap\_range  
     Fl\_Text\_Display, 597  
 findchar\_backward  
     Fl\_Text\_Buffer, 576  
 findchar\_forward  
     Fl\_Text\_Buffer, 576  
 findchars\_backward  
     Fl\_Text\_Buffer, 576  
 findchars\_forward  
     Fl\_Text\_Buffer, 577  
 first  
     Fl\_File\_Icon, 360  
     Fl\_Menu\_Item, 470  
 first\_window  
     fl\_windows, 202  
 Fl, 239  
     add\_awake\_handler\_, 249  
     add\_check, 249  
     add\_fd, 250  
     add\_idle, 250  
     add\_timeout, 250  
     arg, 251  
     args, 251  
     background, 252  
     background2, 252  
     box\_dh, 253  
     box\_dw, 253  
     box\_dx, 253  
     box\_dy, 254  
     check, 254  
     damage, 254  
     display, 254  
     dnd\_text\_ops, 255  
     draw\_box\_active, 255  
     flush, 255  
     foreground, 255  
     get\_awake\_handler\_, 255  
     get\_boxtype, 255  
     get\_system\_colors, 256  
     gl\_visual, 256  
     help, 260  
     idle, 260  
     own\_colormap, 256  
     ready, 256  
     release, 256

reload\_scheme, 257  
remove\_check, 257  
remove\_fd, 257  
remove\_timeout, 257  
repeat\_timeout, 257  
run, 258  
scheme, 258  
set\_boxtype, 258  
set\_idle, 258  
set\_labeltype, 259  
version, 259  
visible\_focus, 259  
visual, 259  
wait, 260

FL.H, 721  
FL\_ACTIVATE  
    Enumerations.H, 716  
FL\_BACKGROUND2\_COLOR  
    Enumerations.H, 715  
FL\_BORDER\_BOX  
    Enumerations.H, 713  
FL\_BORDER\_FRAME  
    Enumerations.H, 713  
FL\_CLOSE  
    Enumerations.H, 716  
FL\_DEACTIVATE  
    Enumerations.H, 716  
FL\_DND\_DRAG  
    Enumerations.H, 717  
FL\_DND\_ENTER  
    Enumerations.H, 717  
FL\_DND\_LEAVE  
    Enumerations.H, 717  
FL\_DND\_RELEASE  
    Enumerations.H, 717  
FL\_DOWN\_BOX  
    Enumerations.H, 713  
FL\_DOWN\_FRAME  
    Enumerations.H, 713  
FL\_DRAG  
    Enumerations.H, 715  
FL\_EMBOSSSED\_BOX  
    Enumerations.H, 713  
FL\_EMBOSSSED\_FRAME  
    Enumerations.H, 713  
FL\_ENGRAVED\_BOX  
    Enumerations.H, 713  
FL\_ENGRAVED\_FRAME  
    Enumerations.H, 713  
FL\_ENTER  
    Enumerations.H, 715  
FL\_FLAT\_BOX  
    Enumerations.H, 713  
FL\_FOCUS

    Enumerations.H, 715  
    FL\_FOREGROUND\_COLOR  
        Enumerations.H, 715  
    FL\_FREE\_BOXTYPE  
        Enumerations.H, 714  
    FL\_FREE\_LABELTYPE  
        Enumerations.H, 718  
    FL\_HIDE  
        Enumerations.H, 716  
    FL\_INACTIVE\_COLOR  
        Enumerations.H, 715  
    FL\_KEYBOARD  
        Enumerations.H, 716  
    FL\_KEYDOWN  
        Enumerations.H, 716  
    FL\_KEYUP  
        Enumerations.H, 716  
    FL\_LEAVE  
        Enumerations.H, 715  
    FL\_MOUSEWHEEL  
        Enumerations.H, 717  
    FL\_MOVE  
        Enumerations.H, 716  
    FL\_NO\_BOX  
        Enumerations.H, 713  
    FL\_NO\_EVENT  
        Enumerations.H, 715  
    FL\_NO\_LABEL  
        Enumerations.H, 717  
    FL\_NORMAL\_LABEL  
        Enumerations.H, 717  
    FL\_PASTE  
        Enumerations.H, 717  
Fl\_Preferences  
    SYSTEM, 501  
    USER, 501  
FL\_PUSH  
    Enumerations.H, 715  
FL\_RELEASE  
    Enumerations.H, 715  
FL\_SELECTION\_COLOR  
    Enumerations.H, 715  
FL\_SELECTIONCLEAR  
    Enumerations.H, 717  
FL\_SHORTCUT  
    Enumerations.H, 716  
FL\_SHOW  
    Enumerations.H, 717  
FL\_THIN\_DOWN\_BOX  
    Enumerations.H, 713  
FL\_THIN\_DOWN\_FRAME  
    Enumerations.H, 713  
FL\_THIN\_UP\_BOX  
    Enumerations.H, 713

FL\_THIN\_UP\_FRAME  
    Enumerations.H, 713

FL\_UNFOCUS  
    Enumerations.H, 716

FL\_UP\_BOX  
    Enumerations.H, 713

FL\_UP\_FRAME  
    Enumerations.H, 713

FL\_WHEN\_CHANGED  
    Enumerations.H, 718

FL\_WHEN\_ENTER\_KEY  
    Enumerations.H, 718

FL\_WHEN\_ENTER\_KEY\_ALWAYS  
    Enumerations.H, 718

FL\_WHEN\_ENTER\_KEY\_CHANGED  
    Enumerations.H, 718

FL\_WHEN\_NEVER  
    Enumerations.H, 718

FL\_WHEN\_NOT\_CHANGED  
    Enumerations.H, 718

FL\_WHEN\_RELEASE  
    Enumerations.H, 718

FL\_WHEN\_RELEASE\_ALWAYS  
    Enumerations.H, 718

Fl\_Widget  
    CHANGED, 661  
    COPIED\_LABEL, 661  
    INACTIVE, 661  
    INVISBLE, 661  
    OUTPUT, 661  
    SHORTCUT\_LABEL, 661  
    VISIBLE\_FOCUS, 661

Fl\_Adjuster, 262  
    draw, 263  
    Fl\_Adjuster, 263  
    Fl\_Adjuster, 263  
    handle, 263  
    soft, 264

Fl\_Adjuster.H, 722

fl\_alert  
    group\_comdlg, 232

Fl\_Align  
    Enumerations.H, 713

FL\_ALIGN\_BOTTOM  
    Enumerations.H, 718

FL\_ALIGN\_CENTER  
    Enumerations.H, 718

FL\_ALIGN\_CLIP  
    Enumerations.H, 718

FL\_ALIGN\_IMAGE\_OVER\_TEXT  
    Enumerations.H, 719

FL\_ALIGN\_INSIDE  
    Enumerations.H, 719

FL\_ALIGN\_LEFT  
    Enumerations.H, 719

    Enumerations.H, 719

FL\_ALIGN\_RIGHT  
    Enumerations.H, 719

FL\_ALIGN\_TEXT\_OVER\_IMAGE  
    Enumerations.H, 719

FL\_ALIGN\_TOP  
    Enumerations.H, 719

FL\_ALIGN\_WRAP  
    Enumerations.H, 720

fl\_arc  
    fl\_arc.cxx, 723  
    fl\_arci.cxx, 724  
    fl\_draw.H, 755

    fl\_arc.cxx, 723  
    fl\_arc, 723

    fl\_arci.cxx, 724  
    fl\_arc, 724  
    fl\_pie, 724

fl\_ask  
    group\_comdlg, 232

fl\_attributes  
    free\_color, 223  
    get\_color, 223  
    get\_font, 223  
    get\_font\_name, 223  
    get\_font\_sizes, 223  
    set\_color, 223, 224  
    set\_font, 224  
    set\_fonts, 224

fl\_begin\_complex\_polygon  
    fl\_draw.H, 755  
    fl\_vertex.cxx, 845

fl\_begin\_points  
    fl\_draw.H, 756  
    fl\_vertex.cxx, 845

Fl\_Bitmap, 265  
    copy, 266  
    draw, 267  
    Fl\_Bitmap, 266  
    Fl\_Bitmap, 266  
    label, 267  
    uncache, 267

Fl\_Bitmap.H, 726

Fl\_BMP\_Image, 269  
    Fl\_BMP\_Image, 269  
    Fl\_BMP\_Image, 269

Fl\_BMP\_Image.H, 727

Fl\_Box, 270  
    draw, 271  
    Fl\_Box, 270  
    Fl\_Box, 270  
    handle, 271

Fl\_Box.H, 728

Fl\_Boxtype

Enumerations.H, 713  
fl\_boxtype.cxx, 729  
    fl\_draw\_box, 730  
    fl\_frame, 730  
    fl\_frame2, 731  
    fl\_internal\_boxtype, 731  
Fl\_Browser, 272  
    ~Fl\_Browser, 276  
    \_remove, 276  
    add, 276  
    bottomline, 277  
    column\_char, 277  
    column\_widths, 277  
    data, 277  
    Fl\_Browser, 276  
    Fl\_Browser, 276  
    format\_char, 278  
    full\_height, 278  
    hide, 279  
    incr\_height, 279  
    insert, 279  
    item\_first, 280  
    item\_next, 280  
    item\_prev, 280  
    item\_select, 280  
    item\_selected, 280  
    item\_width, 280  
    lineposition, 280  
    load, 281  
    make\_visible, 281  
    middleline, 281  
    replace, 281  
    select, 281  
    selected, 281  
    show, 282  
    size, 282  
    swap, 283  
    text, 283  
    topline, 283  
    value, 283  
Fl\_Browser.H, 732  
Fl\_Browser\_, 284  
    deleting, 288  
    deselect, 288  
    display, 288  
    draw, 289  
    find\_item, 289  
Fl\_Browser\_, 288  
Fl\_Browser\_, 288  
    full\_height, 289  
    full\_width, 289  
    handle, 289  
    has\_scrollbar, 289  
    incr\_height, 290  
        inserting, 290  
        item\_first, 290  
        item\_height, 290  
        item\_next, 290  
        item\_prev, 291  
        item\_quick\_height, 291  
        item\_select, 291  
        item\_selected, 291  
        item\_width, 291  
        new\_list, 291  
        redraw\_lines, 292  
        replacing, 292  
        resize, 292  
        scrollbar, 293  
        scrollbar\_left, 292  
        scrollbar\_right, 292  
        select, 292  
        select\_only, 293  
        selection, 293  
        top, 293  
Fl\_Browser\_.H, 733  
Fl\_Button, 294  
    clear, 296  
    down\_box, 296  
    draw, 296  
    Fl\_Button, 296  
    Fl\_Button, 296  
    handle, 297  
    set, 297  
    shortcut, 297, 298  
    value, 298  
Fl\_Button.H, 734  
    FL\_RADIO\_BUTTON, 734  
Fl\_Cairo.H, 735  
Fl\_Cairo\_State, 299  
Fl\_Cairo\_Window, 300  
Fl\_Cairo\_Window.H, 736  
Fl\_Chart, 302  
    add, 304  
    autosize, 304, 305  
    bounds, 305  
    draw, 305  
    Fl\_Chart, 304  
    Fl\_Chart, 304  
    insert, 305  
    maxsize, 306  
    replace, 306  
    size, 306  
    textcolor, 307  
    textfont, 307  
    textsize, 307  
Fl\_Chart.H, 737  
FL\_CHART\_ENTRY, 308  
    col, 308

str, 308  
 val, 308  
**Fl\_Check\_Browser**, 309  
 ~Fl\_Check\_Browser, 310  
 add, 311  
 check\_all, 311  
 check\_none, 311  
 checked, 311  
 clear, 311  
**Fl\_Check\_Browser**, 310  
**Fl\_Check\_Browser**, 310  
 handle, 311  
 nchecked, 311  
 nitems, 311  
 remove, 312  
 set\_checked, 312  
 text, 312  
 value, 312  
**Fl\_Check\_Browser.H**, 739  
**Fl\_Check\_Button**, 313  
 Fl\_Check\_Button, 314  
 Fl\_Check\_Button, 314  
**Fl\_Check\_Button.H**, 740  
**Fl\_Choice**, 315  
 draw, 317  
**Fl\_Choice**, 316  
**Fl\_Choice**, 316  
 handle, 317  
 value, 318  
**fl\_choice**  
 group\_comdlg, 232  
**Fl\_Choice.H**, 741  
**fl\_circle**  
 fl\_draw.H, 756  
 fl\_vertex.cxx, 845  
**fl\_clip\_box**  
 fl\_draw.H, 756  
 fl\_rect.cxx, 813  
**fl\_clip\_region**  
 fl\_rect.cxx, 813  
**fl\_clipboard**  
 copy, 216  
 dnd, 216  
 paste, 217  
 selection, 217  
 selection\_owner, 217, 218  
**Fl\_Clock**, 320  
 Fl\_Clock, 321  
 Fl\_Clock, 321  
 handle, 322  
 update, 322  
**Fl\_Clock.H**, 742  
**Fl\_Clock\_Output**, 323  
 draw, 325  
**Fl\_Clock\_Output**, 324  
**Fl\_Clock\_Output**, 324  
 hour, 325  
 minute, 325  
 second, 325  
 value, 325, 326  
**Fl\_Color**  
 Enumerations.H, 714  
**fl\_color**  
 fl\_color.cxx, 744  
 fl\_draw.H, 757  
 fl\_color.cxx, 743  
 fl\_color, 744  
**Fl\_Color\_Chooser**, 327  
 b, 329  
**Fl\_Color\_Chooser**, 329  
**Fl\_Color\_Chooser**, 329  
 g, 329  
 hsv, 329  
 hsv2rgb, 330  
 hue, 330  
 r, 330  
 rgb, 330  
 rgb2hsv, 330  
 saturation, 331  
 value, 331  
**fl\_color\_chooser**  
 group\_comdlg, 233, 234  
**Fl\_Color\_Chooser.H**, 745  
**Fl\_Counter**, 332  
 draw, 334  
**Fl\_Counter**, 334  
**Fl\_Counter**, 334  
 handle, 334  
 lstep, 335  
 step, 335  
**Fl\_Counter.H**, 746  
**Fl\_CString**  
 fl\_types.h, 838  
**fl\_curve**  
 fl\_curve.cxx, 747  
 fl\_draw.H, 757  
**fl\_curve.cxx**, 747  
 fl\_curve, 747  
**fl\_del\_widget**  
 delete\_widget, 227  
 do\_widget\_deletion, 227  
 watch\_widget\_pointer, 227  
**Fl\_Dial**, 336  
 angle1, 337  
 draw, 337  
**Fl\_Dial**, 337  
**Fl\_Dial**, 337  
 handle, 338

Fl\_Dial.H, 748  
fl\_dir\_chooser  
    group\_comdlg, 234  
Fl\_Double\_Window, 339  
    ~Fl\_Double\_Window, 340  
    flush, 340  
    hide, 340  
    resize, 341  
    show, 341  
Fl\_Double\_Window.H, 749  
fl\_draw.H, 750  
    fl\_arc, 755  
    fl\_begin\_complex\_polygon, 755  
    fl\_begin\_points, 756  
    fl\_circle, 756  
    fl\_clip\_box, 756  
    fl\_color, 757  
    fl\_curve, 757  
    fl\_draw\_box, 758  
    fl\_frame, 758  
    fl\_frame2, 758  
    fl\_gap, 758  
    fl\_mult\_matrix, 759  
    fl\_not\_clipped, 759  
    fl\_pie, 759  
    fl\_polygon, 759, 760  
    fl\_pop\_clip, 760  
    fl\_push\_clip, 760  
    fl\_push\_matrix, 760  
    fl\_rotate, 760  
    fl\_scale, 761  
    fl\_transform\_dx, 761  
    fl\_transform\_dy, 761  
    fl\_transform\_x, 761  
    fl\_transform\_y, 761  
    fl\_transformed\_vertex, 762  
    fl\_translate, 762  
    fl\_vertex, 762  
fl\_draw\_box  
    fl\_boxtyle.cxx, 730  
    fl\_draw.H, 758  
Fl\_End, 342  
Fl\_Event  
    Enumerations.H, 715  
fl\_events  
    add\_handler, 206  
    belowmouse, 207  
    compose, 207  
    compose\_reset, 207  
    event, 208  
    event\_alt, 208  
    event\_button, 208  
    event\_button1, 208  
    event\_button2, 208  
    event\_button3, 209  
    event\_buttons, 209  
    event\_clicks, 209  
    event\_ctrl, 209  
    event\_dx, 210  
    event\_dy, 210  
    event\_inside, 210  
    event\_is\_click, 210  
    event\_key, 210, 211  
    event\_length, 211  
    event\_original\_key, 212  
    event\_shift, 212  
    event\_state, 212  
    event\_text, 212  
    event\_x\_root, 213  
    event\_y\_root, 213  
    focus, 213  
    get\_key, 213  
    get\_mouse, 214  
    handle, 214  
    pushed, 214  
    test\_shortcut, 214  
Fl\_File\_Browser, 343  
    filetype, 344  
    filter, 344  
    Fl\_File\_Browser, 344  
    Fl\_File\_Browser, 344  
    iconsize, 344, 345  
    load, 345  
Fl\_File\_Browser.H, 763  
Fl\_File\_Chooser, 346  
    ~Fl\_File\_Chooser, 351  
    add\_extra, 352  
    color, 352  
    count, 352  
    directory, 352  
    filter, 352  
    filter\_value, 353  
    Fl\_File\_Chooser, 351  
    Fl\_File\_Chooser, 351  
    hide, 353  
    iconsize, 353  
    label, 353  
    preview, 354  
    rescan, 354  
    show, 354  
    textcolor, 354  
    textfont, 354, 355  
    textsize, 355  
    type, 355  
    value, 355  
    visible, 355  
    fl\_file\_chooser  
        group\_comdlg, 235

fl\_file\_chooser\_callback  
     group\_comdlg, 236  
 fl\_file\_chooser\_ok\_label  
     group\_comdlg, 236  
 Fl\_File\_Icon, 357  
     add, 359  
     add\_color, 359  
     add\_vertex, 359  
     clear, 359  
     draw, 360  
     find, 360  
     first, 360  
 Fl\_File\_Icon, 358  
 Fl\_File\_Icon, 358  
 label, 360  
 labeltype, 360  
 load, 361  
 load\_fti, 361  
 load\_image, 361  
 load\_system\_icons, 361  
 next, 362  
 pattern, 362  
 size, 362  
 type, 362  
 value, 362  
 Fl\_File\_Icon.H, 764  
 Fl\_File\_Input, 363  
     down\_box, 364  
     errorcolor, 364  
 Fl\_File\_Input, 364  
 Fl\_File\_Input, 364  
 handle, 365  
 value, 365  
 Fl\_File\_Input.H, 765  
 Fl\_Fill\_Dial, 366  
     Fl\_Fill\_Dial, 366  
     Fl\_Fill\_Dial, 366  
 Fl\_Fill\_Dial.H, 766  
 Fl\_Fill\_Slider, 367  
     Fl\_Fill\_Slider, 367  
     Fl\_Fill\_Slider, 367  
 Fl\_Fill\_Slider.H, 767  
 Fl\_Float\_Input, 368  
     Fl\_Float\_Input, 368  
     Fl\_Float\_Input, 368  
 Fl\_Float\_Input.H, 768  
 Fl\_Font  
     Enumerations.H, 713  
 Fl\_Font\_Descriptor, 369  
 Fl\_Fontsize  
     Enumerations.H, 713  
 Fl\_FormsBitmap, 370  
     bitmap, 370  
     draw, 370  
         set, 371  
 Fl\_FormsBitmap.H, 769  
 Fl\_FormsPixmap, 372  
     draw, 373  
 Fl\_FormsPixmap, 372  
     Fl\_FormsPixmap, 372  
     Pixmap, 373  
     set, 373  
 Fl\_FormsPixmap.H, 770  
 fl\_frame  
     fl\_boxtyle.cxx, 730  
     fl\_draw.H, 758  
 fl\_frame2  
     fl\_boxtyle.cxx, 731  
     fl\_draw.H, 758  
 Fl\_Free, 374  
     draw, 375  
 Fl\_Free, 375  
 Fl\_Free, 375  
     handle, 375  
 Fl\_Free.H, 771  
 fl\_gap  
     fl\_draw.H, 758  
     fl\_vertex.cxx, 845  
 Fl\_GIF\_Image, 377  
     Fl\_GIF\_Image, 377  
     Fl\_GIF\_Image, 377  
 Fl\_GIF\_Image.H, 773  
 Fl\_Gl\_Window, 378  
     can\_do, 381  
     can\_do\_overlay, 381  
     context, 381  
     context\_valid, 381  
     draw, 381  
 Fl\_Gl\_Window, 380  
 Fl\_Gl\_Window, 380  
 flush, 382  
     make\_current, 382  
     make\_overlay\_current, 382  
     mode, 382  
     ortho, 383  
     redraw\_overlay, 383  
     resize, 383  
     show, 384  
     swap\_buffers, 384  
     valid, 384  
 Fl\_Gl\_Window.H, 774  
 Fl\_Glut\_Bitmap\_Font, 386  
 Fl\_Glut\_Window, 387  
     draw, 388  
     draw\_overlay, 388  
 Fl\_Glut\_Window, 388  
 Fl\_Glut\_Window, 388  
     handle, 389

make\_current, 389  
Fl\_Group, 391  
  ~Fl\_Group, 394  
  array, 394  
  begin, 394  
  child, 395  
  clear, 395  
  clip\_children, 395  
  current, 395  
  draw, 395  
  draw\_child, 396  
  draw\_children, 396  
  draw\_outside\_label, 396  
  end, 396  
  find, 396  
  Fl\_Group, 394  
  Fl\_Group, 394  
  focus, 397  
  handle, 397  
  init\_sizes, 397  
  insert, 398  
  remove, 398  
  resizable, 399  
  resize, 399  
  sizes, 400  
  update\_child, 400  
Fl\_Group.H, 775  
Fl\_Help\_Dialog, 402  
  Fl\_Help\_Dialog, 403  
  Fl\_Help\_Dialog, 403  
  h, 404  
  hide, 404  
  load, 404  
  position, 404  
  resize, 404  
  show, 404  
  textsize, 404  
  value, 405  
  visible, 405  
  w, 405  
  x, 405  
  y, 405  
Fl\_Help\_Dialog.H, 776  
Fl\_Help\_Link, 406  
Fl\_Help\_Target, 407  
Fl\_Help\_View, 408  
  ~Fl\_Help\_View, 410  
  clear\_selection, 410  
  directory, 410  
  filename, 410  
  leftline, 410  
  link, 410  
  load, 411  
  resize, 411  
  select\_all, 411  
  size, 411  
  textcolor, 411  
  textfont, 412  
  textsize, 412  
  title, 412  
  topline, 412  
  value, 412  
Fl\_Help\_View.H, 777  
Fl\_Hold\_Browser, 414  
  Fl\_Hold\_Browser, 414  
  Fl\_Hold\_Browser, 414  
  Fl\_Hold\_Browser.H, 778  
  Fl\_Hor\_Fill\_Slider.H, 779  
  Fl\_Hor\_Nice\_Slider.H, 780  
  Fl\_Hor\_Slider.H, 781  
  Fl\_Hor\_Value\_Slider.H, 782  
Fl\_Image, 415  
  color\_average, 417  
  copy, 417  
  count, 418  
  d, 418  
  data, 418  
  desaturate, 418  
  draw, 418, 419  
  draw\_empty, 419  
  Fl\_Image, 417  
  Fl\_Image, 417  
  h, 419  
  inactive, 419  
  label, 419, 420  
  ld, 420  
  uncache, 420  
  w, 420  
Fl\_Image.H, 783  
Fl\_Input, 421  
  draw, 423  
  Fl\_Input, 423  
  Fl\_Input, 423  
  handle, 423  
fl\_input  
  group\_comdlg, 236  
Fl\_Input.H, 784  
Fl\_Input\_, 425  
  copy, 428  
  copy\_cuts, 429  
  cursor\_color, 429  
  cut, 429  
  drawtext, 429  
  Fl\_Input\_, 428  
  Fl\_Input\_, 428  
  index, 429  
  input\_type, 430  
  insert, 430

mark, 430  
 maximum\_size, 430  
 position, 430  
 readonly, 431  
 replace, 431  
 resize, 431  
 shortcut, 432  
 size, 432  
 static\_value, 432  
 textcolor, 433  
 textfont, 433  
 textszie, 433  
 undo, 433  
 up\_down\_position, 433  
 value, 434  
 wrap, 434  
**Fl\_Input\_.H**, 785  
**Fl\_Input\_Choice**, 435  
 add, 437  
 changed, 437  
 clear, 437  
 clear\_changed, 437  
**Fl\_Input\_Choice**, 437  
**Fl\_Input\_Choice**, 437  
 input, 438  
 menu, 438  
 menubutton, 438  
 resize, 438  
 set\_changed, 438  
 value, 438  
**Fl\_Input\_Choice.H**, 786  
**Fl\_Int\_Input**, 440  
 Fl\_Int\_Input, 440  
 Fl\_Int\_Input, 440  
**Fl\_Int\_Input.H**, 787  
**fl\_internal\_boxtype**  
 fl\_boxtype.cxx, 731  
**Fl\_JPEG\_Image**, 441  
 Fl\_JPEG\_Image, 441  
 Fl\_JPEG\_Image, 441  
**Fl\_JPEG\_Image.H**, 788  
**Fl\_Label**, 442  
 draw, 443  
 measure, 443  
 type, 443  
**Fl\_Labeltype**  
 Enumerations.H, 717  
**Fl\_Light\_Button**, 444  
 draw, 445  
 Fl\_Light\_Button, 445  
 Fl\_Light\_Button, 445  
 handle, 445  
**Fl\_Light\_Button.H**, 789  
**Fl\_Line\_Dial.H**, 790  
**FL\_MAJOR\_VERSION**  
 Enumerations.H, 712  
**Fl\_Menu\_**, 447  
 add, 450  
 clear, 451  
 copy, 451  
 down\_box, 451  
 find\_item, 451  
**Fl\_Menu\_**, 450  
**Fl\_Menu\_**, 450  
 global, 451  
 menu, 452  
 mode, 452  
 mvalue, 452  
 picked, 452  
 remove, 453  
 replace, 453  
 shortcut, 453  
 size, 453  
 test\_shortcut, 453  
 text, 454  
 textcolor, 454  
 textfont, 454  
 textszie, 454  
 value, 454, 455  
**Fl\_Menu\_.H**, 791  
**Fl\_Menu\_Bar**, 456  
 draw, 457  
**Fl\_Menu\_Bar**, 457  
**Fl\_Menu\_Bar**, 457  
 handle, 457  
**Fl\_Menu\_Bar.H**, 792  
**Fl\_Menu\_Button**, 459  
 draw, 460  
**Fl\_Menu\_Button**, 460  
**Fl\_Menu\_Button**, 460  
 handle, 461  
 popup, 461  
**Fl\_Menu\_Button.H**, 793  
**Fl\_Menu\_Item**, 462  
 activate, 467  
 active, 467  
 activevisible, 468  
 add, 468  
 argument, 468  
 callback, 468  
 check, 468  
 checkbox, 468  
 checked, 469  
 clear, 469  
 deactivate, 469  
 do\_callback, 469  
 draw, 469  
 find\_shortcut, 470

first, 470  
hide, 470  
label, 470  
labelcolor, 470  
labelfont, 471  
labelsize, 471  
labeltype, 471  
measure, 471  
next, 471, 472  
popup, 472  
pulldown, 472  
radio, 472  
set, 473  
setonly, 473  
shortcut, 473  
show, 473  
submenu, 473  
test\_shortcut, 473  
uncheck, 474  
value, 474  
visible, 474

Fl\_Menu\_Window, 475  
  ~Fl\_Menu\_Window, 476  
  clear\_overlay, 476  
  Fl\_Menu\_Window, 476  
  Fl\_Menu\_Window, 476  
  flush, 476  
  hide, 476  
  set\_overlay, 477  
  show, 477

Fl\_Menu\_Window.H, 794  
fl\_message  
  group\_comdlg, 236

FL\_MINOR\_VERSION  
  Enumerations.H, 712

fl\_mult\_matrix  
  fl\_draw.H, 759  
  fl\_vertex.cxx, 846

Fl\_Multi\_Browser, 478  
  Fl\_Multi\_Browser, 478  
  Fl\_Multi\_Browser, 478

Fl\_Multi\_Browser.H, 795

Fl\_Multiline\_Input, 479  
  Fl\_Multiline\_Input, 479  
  Fl\_Multiline\_Input, 479

Fl\_Multiline\_Input.H, 796

Fl\_Multiline\_Output, 480  
  Fl\_Multiline\_Output, 480  
  Fl\_Multiline\_Output, 480

Fl\_Multiline\_Output.H, 797

fl\_multithread  
  awake, 225  
  lock, 226  
  thread\_message, 226

  unlock, 226

Fl\_Nice\_Slider.H, 798

fl\_not\_clipped  
  fl\_draw.H, 759  
  fl\_rect.cxx, 813

Fl\_Output, 481  
  Fl\_Output, 482  
  Fl\_Output, 482

Fl\_Output.H, 799

Fl\_Overlay\_Window, 483  
  Fl\_Overlay\_Window, 484  
  Fl\_Overlay\_Window, 484  
  hide, 484  
  redraw\_overlay, 484  
  resize, 484  
  show, 485

Fl\_Overlay\_Window.H, 800

Fl\_Pack, 486  
  draw, 487  
  Fl\_Pack, 487  
  Fl\_Pack, 487

Fl\_Pack.H, 801

fl\_password  
  group\_comdlg, 236

FL\_PATCH\_VERSION  
  Enumerations.H, 712

fl\_pie  
  fl\_arci.cxx, 724  
  fl\_draw.H, 759

Fl\_Pixmap, 488  
  color\_average, 490  
  copy, 490  
  desaturate, 490  
  draw, 490  
  Fl\_Pixmap, 489  
  Fl\_Pixmap, 489  
  label, 491  
  uncache, 491

Fl\_Pixmap.H, 802

Fl\_PNG\_Image, 492  
  Fl\_PNG\_Image, 492  
  Fl\_PNG\_Image, 492

Fl\_PNG\_Image.H, 803

Fl\_PNM\_Image, 493  
  Fl\_PNM\_Image, 493  
  Fl\_PNM\_Image, 493

Fl\_PNM\_Image.H, 804

fl\_polygon  
  fl\_draw.H, 759, 760  
  fl\_rect.cxx, 814

fl\_pop\_clip  
  fl\_draw.H, 760  
  fl\_rect.cxx, 814

Fl\_Positioner, 494

draw, 496  
 Fl\_Positioner, 496  
 Fl\_Positioner, 496  
 handle, 496  
 value, 496  
 xbounds, 497  
 xstep, 497  
 xvalue, 497  
 ybounds, 497  
 ystep, 497  
 yvalue, 497  
 Fl\_Positioner.H, 805  
 Fl\_Preferences, 498  
   ~Fl\_Preferences, 502  
   deleteEntry, 503  
   deleteGroup, 503  
   entries, 503  
   entry, 503  
   entryExists, 504  
 Fl\_Preferences, 501, 502  
 Fl\_Preferences, 501, 502  
   flush, 504  
   get, 504–506  
   getUserdataPath, 507  
   group, 507  
   groupExists, 508  
   groups, 508  
   Root, 500  
   set, 508–510  
   size, 510  
 Fl\_Preferences.H, 806  
 Fl\_Preferences::Entry, 512  
 Fl\_Preferences::Name, 513  
   Name, 513  
 Fl\_Progress, 515  
   draw, 516  
 Fl\_Progress, 516  
 Fl\_Progress, 516  
   maximum, 516  
   minimum, 516  
   value, 516  
 Fl\_Progress.H, 807  
 fl\_push\_clip  
   fl\_draw.H, 760  
   fl\_rect.cxx, 814  
 fl\_push\_matrix  
   fl\_draw.H, 760  
   fl\_vertex.cxx, 846  
 FL\_RADIO\_BUTTON  
   Fl\_Button.H, 734  
 Fl\_Radio\_Button.H, 808  
 Fl\_Radio\_Light\_Button.H, 809  
 Fl\_Radio\_Round\_Button.H, 810  
 fl\_rect.cxx, 811  
   fl\_clip\_box, 813  
   fl\_clip\_region, 813  
   fl\_not\_clipped, 813  
   fl\_polygon, 814  
   fl\_pop\_clip, 814  
   fl\_push\_clip, 814  
 Fl\_Repeat\_Button, 518  
   deactivate, 518  
 Fl\_Repeat\_Button, 518  
 Fl\_Repeat\_Button, 518  
   handle, 519  
 Fl\_Repeat\_Button.H, 815  
 FL\_RESERVED\_TYPE  
   Fl\_Widget.H, 849  
 Fl\_Return\_Button, 520  
   draw, 521  
 Fl\_Return\_Button, 521  
 Fl\_Return\_Button, 521  
   handle, 521  
 Fl\_Return\_Button.H, 816  
 Fl\_RGB\_Image, 523  
   ~Fl\_RGB\_Image, 524  
   color\_average, 524  
   copy, 524, 525  
   desaturate, 525  
   draw, 525  
 Fl\_RGB\_Image, 524  
 Fl\_RGB\_Image, 524  
   label, 525, 526  
   uncache, 526  
 Fl\_Roller, 527  
   draw, 528  
 Fl\_Roller, 528  
 Fl\_Roller, 528  
   handle, 528  
 Fl\_Roller.H, 817  
 fl\_rotate  
   fl\_draw.H, 760  
   fl\_vertex.cxx, 846  
 Fl\_Round\_Button, 530  
 Fl\_Round\_Button.H, 818  
 Fl\_Round\_Clock, 532  
   Fl\_Round\_Clock, 532  
   Fl\_Round\_Clock, 532  
 Fl\_Round\_Clock.H, 819  
 fl\_scale  
   fl\_draw.H, 761  
   fl\_vertex.cxx, 846  
 fl\_screen  
   h, 219  
   screen\_xywh, 219, 220  
   w, 220  
   x, 220  
   y, 220

Fl\_Scroll, 533  
  clear, 535  
  draw, 535  
  Fl\_Scroll, 535  
  Fl\_Scroll, 535  
  handle, 536  
  resize, 536  
  scroll\_to, 536  
  xposition, 536  
  yposition, 537  
Fl\_Scroll.H, 820  
Fl\_Scrollbar, 538  
  ~Fl\_Scrollbar, 539  
  draw, 539  
  Fl\_Scrollbar, 539  
  Fl\_Scrollbar, 539  
  handle, 540  
  linesize, 540  
  value, 540  
Fl\_Scrollbar.H, 821  
Fl\_Secret\_Input, 542  
  Fl\_Secret\_Input, 542  
  Fl\_Secret\_Input, 542  
Fl\_Secret\_Input.H, 822  
Fl\_Select\_Browser, 543  
  Fl\_Select\_Browser, 543  
  Fl\_Select\_Browser, 543  
Fl\_Select\_Browser.H, 823  
Fl\_Shared\_Image, 544  
  ~Fl\_Shared\_Image, 546  
  color\_average, 546  
  copy, 547  
  desaturate, 547  
  draw, 547  
  Fl\_Shared\_Image, 546  
  Fl\_Shared\_Image, 546  
  get, 548  
  num\_images, 548  
  refcount, 548  
  release, 548  
  uncache, 548  
Fl\_Shared\_Image.H, 824  
Fl\_Simple\_Counter, 549  
Fl\_Simple\_Counter.H, 825  
Fl\_Single\_Window, 550  
  flush, 551  
  make\_current, 551  
  show, 551  
Fl\_Single\_Window.H, 826  
Fl\_Slider, 552  
  bounds, 554  
  draw, 554  
  Fl\_Slider, 553  
  Fl\_Slider, 553  
            handle, 554  
            scrollvalue, 555  
            slider, 555  
            slider\_size, 555  
Fl\_Slider.H, 827  
Fl\_Spinner, 556  
  Fl\_Spinner, 558  
  Fl\_Spinner, 558  
  format, 558  
  handle, 558  
  maximum, 558  
  maximum, 559  
  minimum, 559  
  mininum, 559  
  range, 559  
  resize, 559  
  step, 559  
  textcolor, 560  
  textfont, 560  
  textsize, 560  
  type, 560  
  value, 561  
Fl\_Spinner.H, 828  
Fl\_String  
  fl\_types.h, 838  
Fl\_Tabs, 562  
  draw, 564  
  Fl\_Tabs, 563  
  Fl\_Tabs, 563  
  handle, 564  
  value, 564, 565  
Fl\_Tabs.H, 829  
Fl\_Text\_Buffer, 566  
  add\_modify\_callback, 574  
  add\_predelete\_callback, 574  
  append, 574  
  appendfile, 574  
  character, 574  
  character\_width, 575  
  clear\_rectangular, 575  
  count\_displayed\_characters, 575  
  count\_lines, 575  
  expand\_character, 575, 576  
  findchar\_backward, 576  
  findchar\_forward, 576  
  findchars\_backward, 576  
  findchars\_forward, 577  
  Fl\_Text\_Buffer, 574  
  Fl\_Text\_Buffer, 574  
  highlight, 577  
  highlight\_position, 577  
  highlight\_selection, 577  
  highlight\_text, 577  
  insert, 577

insert\_, 578  
 insert\_column, 578  
 insert\_column\_, 578  
 insertfile, 578  
 length, 579  
 line\_start, 579  
 line\_text, 579  
 mModifyProcs, 585  
 mNullSubsChar, 585  
 mPredeleteProcs, 585  
 mTabDist, 585  
 null\_substitution\_character, 579  
 outputfile, 579  
 overlay\_rectangular, 579  
 overlay\_rectangular\_, 580  
 primary\_selection, 580  
 rectangular\_selection\_boundaries, 580  
 remove, 580  
 remove\_, 580  
 remove\_modify\_callback, 581  
 remove\_predelete\_callback, 581  
 remove\_rectangular\_, 581  
 remove\_secondary\_selection, 581  
 remove\_selection, 581  
 remove\_selection\_, 581  
 replace\_rectangular, 582  
 replace\_secondary\_selection, 582  
 replace\_selection, 582  
 replace\_selection\_, 582  
 rewind\_lines, 582  
 secondary\_select, 582  
 secondary\_selection, 583  
 secondary\_selection\_position, 583  
 secondary\_selection\_text, 583  
 secondary\_unselect, 583  
 select, 583  
 selection\_text, 583  
 substitute\_null\_characters, 584  
 tab\_distance, 584  
 text, 584  
 text\_in\_rectangle, 584  
 text\_range, 584  
 unhighlight, 584  
 unsubstitute\_null\_characters, 585  
 word\_end, 585  
**Fl\_Text\_Buffer.H**, 830  
**Fl\_Text\_Display**, 587  
 ~**Fl\_Text\_Display**, 594  
 buffer, 594  
 calc\_line\_starts, 594  
 count\_lines, 595  
 cursor\_color, 595  
 cursor\_style, 595  
 display\_insert, 595  
 draw, 596  
 draw\_line\_numbers, 596  
 draw\_range, 596  
 draw\_string, 596  
 draw\_text, 596  
 find\_line\_end, 597  
 find\_wrap\_range, 597  
**Fl\_Text\_Display**, 594  
**Fl\_Text\_Display**, 594  
 get\_absolute\_top\_line\_number, 597  
 handle, 597  
 highlight\_data, 598  
 insert, 598  
 line\_end, 599  
 maintain\_absolute\_top\_line\_number, 599  
 measure\_deleted\_lines, 599  
 measure\_proportional\_character, 599  
 move\_down, 600  
 move\_left, 600  
 move\_right, 600  
 move\_up, 600  
 next\_word, 600  
 offset\_line\_starts, 600  
 overstrike, 601  
 position\_style, 601  
 position\_to\_line, 601  
 position\_to\_linecol, 601  
 position\_to\_xy, 602  
 previous\_word, 602  
 redisplay\_range, 602  
 reset\_absolute\_top\_line\_number, 602  
 scroll, 602  
 scrollbar\_width, 602, 603  
 shortcut, 603  
 show\_insert\_position, 603  
 skip\_lines, 603  
 textcolor, 603  
 textfont, 604  
 textsize, 604  
 word\_end, 604  
 word\_start, 604  
 wrap\_mode, 604  
 wrap\_uses\_character, 604  
 wrapped\_column, 605  
 wrapped\_line\_counter, 605  
 wrapped\_row, 605  
 xy\_to\_position, 606  
 xy\_to\_rowcol, 606  
**Fl\_Text\_Display.H**, 831  
**Fl\_Text\_Display::Style\_Table\_Entry**, 607  
**Fl\_Text\_Editor**, 608  
 add\_default\_key\_bindings, 611  
 bound\_key\_function, 611  
 default\_key\_function, 611

Fl\_Text\_Editor, 611  
Fl\_Text\_Editor, 611  
handle, 612  
insert\_mode, 612  
kf\_backspace, 612  
kf\_c\_s\_move, 613  
kf\_copy, 613  
kf\_cut, 613  
kf\_delete, 613  
kf\_down, 613  
kf\_end, 613  
kf\_home, 613  
kf\_insert, 613  
kf\_left, 614  
kf\_move, 614  
kf\_page\_down, 614  
kf\_page\_up, 614  
kf\_paste, 614  
kf\_right, 614  
kf\_select\_all, 614  
kf\_shift\_move, 614  
kf\_undo, 615  
kf\_up, 615  
remove\_all\_key\_bindings, 615  
remove\_key\_binding, 615  
Fl\_Text\_Editor.H, 832  
Fl\_Text\_Editor::Key\_Binding, 616  
Fl\_Text\_Selection, 617  
Fl\_Tile, 619  
    Fl\_Tile, 620  
    Fl\_Tile, 620  
    handle, 620  
    position, 621  
    resize, 621  
Fl\_Tile.H, 833  
Fl\_Tiled\_Image, 622  
    color\_average, 623  
    copy, 623  
    desaturate, 623  
    draw, 624  
    Fl\_Tiled\_Image, 623  
    Fl\_Tiled\_Image, 623  
Fl\_Tiled\_Image.H, 834  
Fl\_Timer, 625  
    direction, 626  
    draw, 626  
    Fl\_Timer, 626  
    Fl\_Timer, 626  
    handle, 626  
    suspended, 627  
Fl\_Timer.H, 835  
Fl\_Toggle\_Button, 628  
    Fl\_Toggle\_Button, 628  
    Fl\_Toggle\_Button, 628  
Fl\_Toggle\_Button.H, 836  
Fl\_Tooltip, 629  
    color, 630  
    current, 630  
    delay, 630, 631  
    disable, 631  
    enable, 631  
    enabled, 631  
    enter\_area, 631  
    font, 631  
    hoverdelay, 631, 632  
    size, 632  
    textcolor, 632  
Fl\_Tooltip.H, 837  
fl\_transform\_dx  
    fl\_draw.H, 761  
    fl\_vertex.cxx, 847  
fl\_transform\_dy  
    fl\_draw.H, 761  
    fl\_vertex.cxx, 847  
fl\_transform\_x  
    fl\_draw.H, 761  
    fl\_vertex.cxx, 847  
fl\_transform\_y  
    fl\_draw.H, 761  
    fl\_vertex.cxx, 847  
fl\_transformed\_vertex  
    fl\_draw.H, 762  
    fl\_vertex.cxx, 847  
fl\_translate  
    fl\_draw.H, 762  
    fl\_vertex.cxx, 848  
fl\_types.h, 838  
    Fl\_CString, 838  
    Fl\_String, 838  
Fl\_Valuator, 633  
    bounds, 635  
    clamp, 636  
    Fl\_Valuator, 635  
    Fl\_Valuator, 635  
    format, 636  
    handle\_drag, 636  
    handle\_release, 636  
    increment, 636  
    maximum, 636, 637  
    minimum, 637  
    precision, 637  
    range, 637  
    round, 637  
    set\_value, 637  
    step, 637  
    value, 638  
Fl\_Valuator.H, 839  
Fl\_Value\_Input, 639

cursor\_color, 641  
 draw, 641  
**Fl\_Value\_Input**, 641  
**Fl\_Value\_Input**, 641  
 handle, 642  
 resize, 642  
 shortcut, 643  
 soft, 643  
 textcolor, 643  
 textfont, 643  
 textszie, 643, 644  
**Fl\_Value\_Input.H**, 840  
**Fl\_Value\_Output**, 645  
 draw, 647  
**Fl\_Value\_Output**, 646  
**Fl\_Value\_Output**, 646  
 handle, 647  
 soft, 647  
 textcolor, 648  
 textfont, 648  
 textszie, 648  
**Fl\_Value\_Output.H**, 841  
**Fl\_Value\_Slider**, 649  
 draw, 650  
**Fl\_Value\_Slider**, 650  
**Fl\_Value\_Slider**, 650  
 handle, 650  
 textcolor, 651  
 textfont, 651  
 textszie, 651  
**Fl\_Value\_Slider.H**, 842  
**FL\_VERSION**  
 Enumerations.H, 712  
**fl\_vertex**  
 fl\_draw.H, 762  
 fl\_vertex.cxx, 848  
**fl\_vertex.cxx**, 843  
 fl\_begin\_complex\_polygon, 845  
 fl\_begin\_points, 845  
 fl\_circle, 845  
 fl\_gap, 845  
 fl\_mult\_matrix, 846  
 fl\_push\_matrix, 846  
 fl\_rotate, 846  
 fl\_scale, 846  
 fl\_transform\_dx, 847  
 fl\_transform\_dy, 847  
 fl\_transform\_x, 847  
 fl\_transform\_y, 847  
 fl\_transformed\_vertex, 847  
 fl\_translate, 848  
 fl\_vertex, 848  
**Fl\_When**  
 Enumerations.H, 718

**Fl\_Widget**, 653  
 ~Fl\_Widget, 661  
 activate, 662  
 active, 662  
 active\_r, 662  
 align, 663  
 argument, 663  
 box, 664  
 callback, 664, 665  
 changed, 665  
 clear\_changed, 666  
 clear\_damage, 666  
 clear\_output, 666  
 clear\_visible, 667  
 clear\_visible\_focus, 667  
 color, 667, 668  
 color2, 668  
 contains, 668  
 copy\_label, 669  
 damage, 669  
 damage\_resize, 670  
 deactivate, 670  
 default\_callback, 670  
 deimage, 671  
 do\_callback, 671, 672  
 draw, 672  
 draw\_box, 673  
 draw\_focus, 673  
**Fl\_Widget**, 661  
**Fl\_Widget**, 661  
 h, 673, 674  
 handle, 674  
 hide, 674  
 image, 675  
 inside, 675  
 label, 676  
 label\_shortcut, 676  
 labelcolor, 677  
 labelfont, 677  
 labelszie, 678  
 labeltype, 678  
 measure\_label, 679  
 output, 679  
 parent, 679  
 position, 679  
 redraw, 680  
 redraw\_label, 680  
 resize, 680  
 selection\_color, 681  
 set\_changed, 682  
 set\_output, 682  
 set\_visible, 682  
 set\_visible\_focus, 682  
 show, 683

size, 683  
take\_focus, 683  
takesevents, 684  
test\_shortcut, 684  
tooltip, 684  
type, 685  
user\_data, 685  
visible, 686  
visible\_focus, 686  
visible\_r, 687  
w, 687  
when, 688  
window, 689  
x, 689  
y, 690  
**Fl\_Widget.H**, 849  
  **FL\_RESERVED\_TYPE**, 849  
**Fl\_Window**, 691  
  ~**Fl\_Window**, 695  
  border, 695  
  clear\_border, 695  
  copy\_label, 695  
  current, 696  
  current\_, 702  
  cursor, 696  
  default\_cursor, 696  
  draw, 696  
  **Fl\_Window**, 694, 695  
  **Fl\_Window**, 694, 695  
  flush, 697  
  fullscreen, 697  
  handle, 697  
  hide, 698  
  hotspot, 698  
  iconize, 698  
  iconlabel, 699  
  label, 699  
  make\_current, 699  
  modal, 699  
  non\_modal, 699  
  override, 699  
  resize, 700  
  set\_modal, 700  
  set\_non\_modal, 700  
  show, 700  
  shown, 701  
  size\_range, 701  
  xclass, 701  
**Fl\_Window.H**, 850  
**fl\_windows**  
  atclose, 203  
  default\_atclose, 202  
  first\_window, 202  
  grab, 202  
modal, 203  
next\_window, 203  
set\_atclose, 203  
**Fl\_Wizard**, 703  
  **Fl\_Wizard**, 703  
  **Fl\_Wizard**, 703  
  next, 704  
  prev, 704  
  value, 704  
**Fl\_Wizard.H**, 851  
**Fl\_XBM\_Image**, 705  
  **Fl\_XBM\_Image**, 705  
  **Fl\_XBM\_Image**, 705  
**Fl\_XBM\_Image.H**, 852  
**Fl\_XPM\_Image**, 706  
  **Fl\_XPM\_Image**, 706  
  **Fl\_XPM\_Image**, 706  
**Fl\_XPM\_Image.H**, 853  
flush  
  **Fl**, 255  
  **Fl\_Double\_Window**, 340  
  **Fl\_Gl\_Window**, 382  
  **Fl\_Menu\_Window**, 476  
  **Fl\_Preferences**, 504  
  **Fl\_Single\_Window**, 551  
  **Fl\_Window**, 697  
focus  
  **fl\_events**, 213  
  **Fl\_Group**, 397  
font  
  **Fl\_Tooltip**, 631  
foreground  
  **Fl**, 255  
format  
  **Fl\_Spinner**, 558  
  **Fl\_Valuator**, 636  
format\_char  
  **Fl\_Browser**, 278  
free\_color  
  **fl\_attributes**, 223  
full\_height  
  **Fl\_Browser**, 278  
  **Fl\_Browser\_**, 289  
full\_width  
  **Fl\_Browser\_**, 289  
fullscreen  
  **Fl\_Window**, 697  
g  
  **Fl\_Color\_Chooser**, 329  
get  
  **Fl\_Preferences**, 504–506  
  **Fl\_Shared\_Image**, 548  
get\_absolute\_top\_line\_number

Fl\_Text\_Display, 597  
 get\_awake\_handler\_  
     Fl, 255  
 get\_boxtype  
     Fl, 255  
 get\_color  
     fl\_attributes, 223  
 get\_font  
     fl\_attributes, 223  
 get\_font\_name  
     fl\_attributes, 223  
 get\_font\_sizes  
     fl\_attributes, 223  
 get\_key  
     fl\_events, 213  
 get\_mouse  
     fl\_events, 214  
 get\_system\_colors  
     Fl, 256  
 getUserdataPath  
     Fl\_Preferences, 507  
 gl\_visual  
     Fl, 256  
 global  
     Fl\_Menu\_, 451  
 grab  
     fl\_windows, 202  
 group  
     Fl\_Preferences, 507  
 group\_cairo  
     cairo\_autolink\_context, 229  
     cairo\_cc, 230  
     cairo\_make\_current, 230  
 group\_comdlg  
     error, 237  
     fatal, 237  
     fl\_alert, 232  
     fl\_ask, 232  
     fl\_choice, 232  
     fl\_color\_chooser, 233, 234  
     fl\_dir\_chooser, 234  
     fl\_file\_chooser, 235  
     fl\_file\_chooser\_callback, 236  
     fl\_file\_chooser\_ok\_label, 236  
     fl\_input, 236  
     fl\_message, 236  
     fl\_password, 236  
     warning, 237  
 groupExists  
     Fl\_Preferences, 508  
 groups  
     Fl\_Preferences, 508  
 h

Fl\_Help\_Dialog, 404  
 Fl\_Image, 419  
 fl\_screen, 219  
 Fl\_Widget, 673, 674  
 handle  
     Fl\_Adjuster, 263  
     Fl\_Box, 271  
     Fl\_Browser\_, 289  
     Fl\_Button, 297  
     Fl\_Check\_Browser, 311  
     Fl\_Choice, 317  
     Fl\_Clock, 322  
     Fl\_Counter, 334  
     Fl\_Dial, 338  
     fl\_events, 214  
     Fl\_File\_Input, 365  
     Fl\_Free, 375  
     Fl\_Glut\_Window, 389  
     Fl\_Group, 397  
     Fl\_Input, 423  
     Fl\_Light\_Button, 445  
     Fl\_Menu\_Bar, 457  
     Fl\_Menu\_Button, 461  
     Fl\_Positioner, 496  
     Fl\_Repeat\_Button, 519  
     Fl\_Return\_Button, 521  
     Fl\_Roller, 528  
     Fl\_Scroll, 536  
     Fl\_Scrollbar, 540  
     Fl\_Slider, 554  
     Fl\_Spinner, 558  
     Fl\_Tabs, 564  
     Fl\_Text\_Display, 597  
     Fl\_Text\_Editor, 612  
     Fl\_Tile, 620  
     Fl\_Timer, 626  
     Fl\_Value\_Input, 642  
     Fl\_Value\_Output, 647  
     Fl\_Value\_Slider, 650  
     Fl\_Widget, 674  
     Fl\_Window, 697  
 handle\_drag  
     Fl\_Valuator, 636  
 handle\_release  
     Fl\_Valuator, 636  
 has\_scrollbar  
     Fl\_Browser\_, 289  
 help  
     Fl, 260  
 hide  
     Fl\_Browser, 279  
     Fl\_Double\_Window, 340  
     Fl\_File\_Chooser, 353  
     Fl\_Help\_Dialog, 404

Fl\_Menu\_Item, 470  
Fl\_Menu\_Window, 476  
Fl\_Overlay\_Window, 484  
Fl\_Widget, 674  
Fl\_Window, 698  
highlight  
  Fl\_Text\_Buffer, 577  
highlight\_data  
  Fl\_Text\_Display, 598  
highlight\_position  
  Fl\_Text\_Buffer, 577  
highlight\_selection  
  Fl\_Text\_Buffer, 577  
highlight\_text  
  Fl\_Text\_Buffer, 577  
hotspot  
  Fl\_Window, 698  
hour  
  Fl\_Clock\_Output, 325  
hoverdelay  
  Fl\_Tooltip, 631, 632  
hsv  
  Fl\_Color\_Chooser, 329  
hsv2rgb  
  Fl\_Color\_Chooser, 330  
hue  
  Fl\_Color\_Chooser, 330  
iconize  
  Fl\_Window, 698  
iconlabel  
  Fl\_Window, 699  
iconsize  
  Fl\_File\_Browser, 344, 345  
  Fl\_File\_Chooser, 353  
idle  
  Fl, 260  
image  
  Fl\_Widget, 675  
INACTIVE  
  Fl\_Widget, 661  
inactive  
  Fl\_Image, 419  
incr\_height  
  Fl\_Browser, 279  
  Fl\_Browser\_, 290  
increment  
  Fl\_Valuator, 636  
index  
  Fl\_Input\_, 429  
init\_sizes  
  Fl\_Group, 397  
input  
  Fl\_Input\_Choice, 438  
            input\_type  
            Fl\_Input\_, 430  
insert  
  Fl\_Browser, 279  
  Fl\_Chart, 305  
  Fl\_Group, 398  
  Fl\_Input\_, 430  
  Fl\_Text\_Buffer, 577  
  Fl\_Text\_Display, 598  
insert\_  
  Fl\_Text\_Buffer, 578  
insert\_column  
  Fl\_Text\_Buffer, 578  
insert\_column\_  
  Fl\_Text\_Buffer, 578  
insert\_mode  
  Fl\_Text\_Editor, 612  
insertfile  
  Fl\_Text\_Buffer, 578  
inserting  
  Fl\_Browser\_, 290  
inside  
  Fl\_Widget, 675  
INVISIBLE  
  Fl\_Widget, 661  
item\_first  
  Fl\_Browser, 280  
  Fl\_Browser\_, 290  
item\_height  
  Fl\_Browser\_, 290  
item\_next  
  Fl\_Browser, 280  
  Fl\_Browser\_, 290  
item\_prev  
  Fl\_Browser, 280  
  Fl\_Browser\_, 291  
item\_quick\_height  
  Fl\_Browser\_, 291  
item\_select  
  Fl\_Browser, 280  
  Fl\_Browser\_, 291  
item\_selected  
  Fl\_Browser, 280  
  Fl\_Browser\_, 291  
item\_width  
  Fl\_Browser, 280  
  Fl\_Browser\_, 291  
kf\_backspace  
  Fl\_Text\_Editor, 612  
kf\_c\_s\_move  
  Fl\_Text\_Editor, 613  
kf\_copy  
  Fl\_Text\_Editor, 613

kf\_cut  
     Fl\_Text\_Editor, 613  
 kf\_delete  
     Fl\_Text\_Editor, 613  
 kf\_down  
     Fl\_Text\_Editor, 613  
 kf\_end  
     Fl\_Text\_Editor, 613  
 kf\_home  
     Fl\_Text\_Editor, 613  
 kf\_insert  
     Fl\_Text\_Editor, 613  
 kf\_left  
     Fl\_Text\_Editor, 614  
 kf\_move  
     Fl\_Text\_Editor, 614  
 kf\_page\_down  
     Fl\_Text\_Editor, 614  
 kf\_page\_up  
     Fl\_Text\_Editor, 614  
 kf\_paste  
     Fl\_Text\_Editor, 614  
 kf\_right  
     Fl\_Text\_Editor, 614  
 kf\_select\_all  
     Fl\_Text\_Editor, 614  
 kf\_shift\_move  
     Fl\_Text\_Editor, 614  
 kf\_undo  
     Fl\_Text\_Editor, 615  
 kf\_up  
     Fl\_Text\_Editor, 615  
  
 label  
     Fl\_Bitmap, 267  
     Fl\_File\_Chooser, 353  
     Fl\_File\_Icon, 360  
     Fl\_Image, 419, 420  
     Fl\_Menu\_Item, 470  
     Fl\_Pixmap, 491  
     Fl\_RGB\_Image, 525, 526  
     Fl\_Widget, 676  
     Fl\_Window, 699  
 label\_shortcut  
     Fl\_Widget, 676  
 labelcolor  
     Fl\_Menu\_Item, 470  
     Fl\_Widget, 677  
 labelfont  
     Fl\_Menu\_Item, 471  
     Fl\_Widget, 677  
 labelsize  
     Fl\_Menu\_Item, 471  
     Fl\_Widget, 678  
  
 labeltype  
     Fl\_File\_Icon, 360  
     Fl\_Menu\_Item, 471  
     Fl\_Widget, 678  
 ld  
     Fl\_Image, 420  
 leftline  
     Fl\_Help\_View, 410  
 length  
     Fl\_Text\_Buffer, 579  
 line\_end  
     Fl\_Text\_Display, 599  
 line\_start  
     Fl\_Text\_Buffer, 579  
 line\_text  
     Fl\_Text\_Buffer, 579  
 lineposition  
     Fl\_Browser, 280  
 linesize  
     Fl\_Scrollbar, 540  
 link  
     Fl\_Help\_View, 410  
 load  
     Fl\_Browser, 281  
     Fl\_File\_Browser, 345  
     Fl\_File\_Icon, 361  
     Fl\_Help\_Dialog, 404  
     Fl\_Help\_View, 411  
 load\_fti  
     Fl\_File\_Icon, 361  
 load\_image  
     Fl\_File\_Icon, 361  
 load\_system\_icons  
     Fl\_File\_Icon, 361  
 lock  
     fl\_multithread, 226  
 lstep  
     Fl\_Counter, 335  
  
 maintain\_absolute\_top\_line\_number  
     Fl\_Text\_Display, 599  
 make\_current  
     Fl\_Gl\_Window, 382  
     Fl\_Glut\_Window, 389  
     Fl\_Single\_Window, 551  
     Fl\_Window, 699  
 make\_overlay\_current  
     Fl\_Gl\_Window, 382  
 make\_visible  
     Fl\_Browser, 281  
 mark  
     Fl\_Input\_, 430  
 maximum  
     Fl\_Progress, 516

Fl\_Spinner, 558  
Fl\_Valuator, 636, 637  
maximum\_size  
    Fl\_Input\_, 430  
maximum  
    Fl\_Spinner, 559  
maxsize  
    Fl\_Chart, 306  
measure  
    Fl\_Label, 443  
    Fl\_Menu\_Item, 471  
measure\_deleted\_lines  
    Fl\_Text\_Display, 599  
measure\_label  
    Fl\_Widget, 679  
measure\_proportional\_character  
    Fl\_Text\_Display, 599  
menu  
    Fl\_Input\_Choice, 438  
    Fl\_Menu\_, 452  
menubutton  
    Fl\_Input\_Choice, 438  
middleline  
    Fl\_Browser, 281  
minimum  
    Fl\_Progress, 516  
    Fl\_Spinner, 559  
    Fl\_Valuator, 637  
mininum  
    Fl\_Spinner, 559  
minute  
    Fl\_Clock\_Output, 325  
mModifyProcs  
    Fl\_Text\_Buffer, 585  
mNullSubsChar  
    Fl\_Text\_Buffer, 585  
modal  
    Fl\_Window, 699  
    fl\_windows, 203  
mode  
    Fl\_Gl\_Window, 382  
    Fl\_Menu\_, 452  
move\_down  
    Fl\_Text\_Display, 600  
move\_left  
    Fl\_Text\_Display, 600  
move\_right  
    Fl\_Text\_Display, 600  
move\_up  
    Fl\_Text\_Display, 600  
mPredeleteProcs  
    Fl\_Text\_Buffer, 585  
mTabDist  
    Fl\_Text\_Buffer, 585

Multithreading support functions, 225  
mvalue  
    Fl\_Menu\_, 452

Name  
    Fl\_Preferences::Name, 513  
nchecked  
    Fl\_Check\_Browser, 311  
new\_list  
    Fl\_Browser\_, 291  
next  
    Fl\_File\_Icon, 362  
    Fl\_Menu\_Item, 471, 472  
    Fl\_Wizard, 704  
next\_window  
    fl\_windows, 203  
next\_word  
    Fl\_Text\_Display, 600  
nitems  
    Fl\_Check\_Browser, 311  
non\_modal  
    Fl\_Window, 699  
null\_substitution\_character  
    Fl\_Text\_Buffer, 579  
num\_images  
    Fl\_Shared\_Image, 548

offset\_line\_starts  
    Fl\_Text\_Display, 600  
ortho  
    Fl\_Gl\_Window, 383  
OUTPUT  
    Fl\_Widget, 661  
output  
    Fl\_Widget, 679  
outputfile  
    Fl\_Text\_Buffer, 579  
overlay\_rectangular  
    Fl\_Text\_Buffer, 579  
overlay\_rectangular\_  
    Fl\_Text\_Buffer, 580  
override  
    Fl\_Window, 699  
overstrike  
    Fl\_Text\_Display, 601  
own\_colormap  
    Fl, 256

parent  
    Fl\_Widget, 679  
paste  
    fl\_clipboard, 217  
pattern  
    Fl\_File\_Icon, 362

picked  
     Fl\_Menu\_, 452  
 Pixmap  
     Fl\_FormsPixmap, 373  
 popup  
     Fl\_Menu\_Button, 461  
     Fl\_Menu\_Item, 472  
 position  
     Fl\_Help\_Dialog, 404  
     Fl\_Input\_, 430  
     Fl\_Tile, 621  
     Fl\_Widget, 679  
 position\_style  
     Fl\_Text\_Display, 601  
 position\_to\_line  
     Fl\_Text\_Display, 601  
 position\_to\_linecol  
     Fl\_Text\_Display, 601  
 position\_to\_xy  
     Fl\_Text\_Display, 602  
 precision  
     Fl\_Valuator, 637  
 prev  
     Fl\_Wizard, 704  
 preview  
     Fl\_File\_Chooser, 354  
 previous\_word  
     Fl\_Text\_Display, 602  
 primary\_selection  
     Fl\_Text\_Buffer, 580  
 pulldown  
     Fl\_Menu\_Item, 472  
 pushed  
     fl\_events, 214  
  
 r  
     Fl\_Color\_Chooser, 330  
 radio  
     Fl\_Menu\_Item, 472  
 range  
     Fl\_Spinner, 559  
     Fl\_Valuator, 637  
 readonly  
     Fl\_Input\_, 431  
 ready  
     Fl, 256  
 rectangular\_selection\_boundaries  
     Fl\_Text\_Buffer, 580  
 redisplay\_range  
     Fl\_Text\_Display, 602  
 redraw  
     Fl\_Widget, 680  
 redraw\_label  
     Fl\_Widget, 680  
  
 redraw\_lines  
     Fl\_Browser\_, 292  
 redraw\_overlay  
     Fl\_Gl\_Window, 383  
     Fl\_Overlay\_Window, 484  
 refcount  
     Fl\_Shared\_Image, 548  
 release  
     Fl, 256  
     Fl\_Shared\_Image, 548  
 reload\_scheme  
     Fl, 257  
 remove  
     Fl\_Check\_Browser, 312  
     Fl\_Group, 398  
     Fl\_Menu\_, 453  
     Fl\_Text\_Buffer, 580  
 remove\_  
     Fl\_Text\_Buffer, 580  
 remove\_all\_key\_bindings  
     Fl\_Text\_Editor, 615  
 remove\_check  
     Fl, 257  
 remove\_fd  
     Fl, 257  
 remove\_key\_binding  
     Fl\_Text\_Editor, 615  
 remove\_modify\_callback  
     Fl\_Text\_Buffer, 581  
 remove\_predelete\_callback  
     Fl\_Text\_Buffer, 581  
 remove\_rectangular\_  
     Fl\_Text\_Buffer, 581  
 remove\_secondary\_selection  
     Fl\_Text\_Buffer, 581  
 remove\_selection  
     Fl\_Text\_Buffer, 581  
 remove\_selection\_  
     Fl\_Text\_Buffer, 581  
 remove\_timeout  
     Fl, 257  
 repeat\_timeout  
     Fl, 257  
 replace  
     Fl\_Browser, 281  
     Fl\_Chart, 306  
     Fl\_Input\_, 431  
     Fl\_Menu\_, 453  
 replace\_rectangular  
     Fl\_Text\_Buffer, 582  
 replace\_secondary\_selection  
     Fl\_Text\_Buffer, 582  
 replace\_selection  
     Fl\_Text\_Buffer, 582

replace\_selection\_  
    Fl\_Text\_Buffer, 582

replacing  
    Fl\_Browser\_, 292

rescan  
    Fl\_File\_Chooser, 354

reset\_absolute\_top\_line\_number  
    Fl\_Text\_Display, 602

resizable  
    Fl\_Group, 399

resize  
    Fl\_Browser\_, 292  
    Fl\_Double\_Window, 341  
    Fl\_Gl\_Window, 383  
    Fl\_Group, 399  
    Fl\_Help\_Dialog, 404  
    Fl\_Help\_View, 411  
    Fl\_Input\_, 431  
    Fl\_Input\_Choice, 438  
    Fl\_Overlay\_Window, 484  
    Fl\_Scroll, 536  
    Fl\_Spinner, 559  
    Fl\_Tile, 621  
    Fl\_Value\_Input, 642  
    Fl\_Widget, 680  
    Fl\_Window, 700

rewind\_lines  
    Fl\_Text\_Buffer, 582

rgb  
    Fl\_Color\_Chooser, 330

rgb2hsv  
    Fl\_Color\_Chooser, 330

Root  
    Fl\_Preferences, 500

round  
    Fl\_Valuator, 637

run  
    Fl, 258

Safe widget deletion support functions, 227

saturation  
    Fl\_Color\_Chooser, 331

scheme  
    Fl, 258

Screen functions, 219

screen\_xywh  
    fl\_screen, 219, 220

scroll  
    Fl\_Text\_Display, 602

scroll\_to  
    Fl\_Scroll, 536

scrollbar  
    Fl\_Browser\_, 293

scrollbar\_left  
    Fl\_Browser\_, 292

scrollbar\_right  
    Fl\_Browser\_, 292

scrollbar\_width  
    Fl\_Text\_Display, 602, 603

scrollvalue  
    Fl\_Slider, 555

second  
    Fl\_Clock\_Output, 325

secondary\_select  
    Fl\_Text\_Buffer, 582

secondary\_selection  
    Fl\_Text\_Buffer, 583

secondary\_selection\_position  
    Fl\_Text\_Buffer, 583

secondary\_selection\_text  
    Fl\_Text\_Buffer, 583

secondary\_unselect  
    Fl\_Text\_Buffer, 583

select  
    Fl\_Browser, 281  
    Fl\_Browser\_, 292  
    Fl\_Text\_Buffer, 583

select\_all  
    Fl\_Help\_View, 411

select\_only  
    Fl\_Browser\_, 293

selected  
    Fl\_Browser, 281

selection  
    Fl\_Browser\_, 293  
    fl\_clipboard, 217

Selection & Clipboard functions, 216

selection\_color  
    Fl\_Widget, 681

selection\_owner  
    fl\_clipboard, 217, 218

selection\_text  
    Fl\_Text\_Buffer, 583

set  
    Fl\_Button, 297  
    Fl\_FormsBitmap, 371  
    Fl\_FormsPixmap, 373  
    Fl\_Menu\_Item, 473  
    Fl\_Preferences, 508–510

set\_atclose  
    fl\_windows, 203

set\_boxtype  
    Fl, 258

set\_changed  
    Fl\_Input\_Choice, 438  
    Fl\_Widget, 682

set\_checked  
    Fl\_Check\_Browser, 312

set\_color  
     fl\_attributes, 223, 224  
 set\_font  
     fl\_attributes, 224  
 set\_fonts  
     fl\_attributes, 224  
 set\_idle  
     Fl, 258  
 set\_labeltype  
     Fl, 259  
 set\_modal  
     Fl\_Window, 700  
 set\_non\_modal  
     Fl\_Window, 700  
 set\_output  
     Fl\_Widget, 682  
 set\_overlay  
     Fl\_Menu\_Window, 477  
 set\_value  
     Fl\_Valuator, 637  
 set\_visible  
     Fl\_Widget, 682  
 set\_visible\_focus  
     Fl\_Widget, 682  
 setonly  
     Fl\_Menu\_Item, 473  
 shortcut  
     Fl\_Button, 297, 298  
     Fl\_Input\_, 432  
     Fl\_Menu\_, 453  
     Fl\_Menu\_Item, 473  
     Fl\_Text\_Display, 603  
     Fl\_Value\_Input, 643  
 SHORTCUT\_LABEL  
     Fl\_Widget, 661  
 show  
     Fl\_Browser, 282  
     Fl\_Double\_Window, 341  
     Fl\_File\_Chooser, 354  
     Fl\_Gl\_Window, 384  
     Fl\_Help\_Dialog, 404  
     Fl\_Menu\_Item, 473  
     Fl\_Menu\_Window, 477  
     Fl\_Overlay\_Window, 485  
     Fl\_Single\_Window, 551  
     Fl\_Widget, 683  
     Fl\_Window, 700  
 show\_insert\_position  
     Fl\_Text\_Display, 603  
 shown  
     Fl\_Window, 701  
 size  
     Fl\_Browser, 282  
     Fl\_Chart, 306  
     Fl\_File\_Icon, 362  
     Fl\_Help\_View, 411  
     Fl\_Input\_, 432  
     Fl\_Menu\_, 453  
     Fl\_Preferences, 510  
     Fl\_Tooltip, 632  
     Fl\_Widget, 683  
 size\_range  
     Fl\_Window, 701  
 sizes  
     Fl\_Group, 400  
 skip\_lines  
     Fl\_Text\_Display, 603  
 slider  
     Fl\_Slider, 555  
 slider\_size  
     Fl\_Slider, 555  
 soft  
     Fl\_Adjuster, 264  
     Fl\_Value\_Input, 643  
     Fl\_Value\_Output, 647  
 static\_value  
     Fl\_Input\_, 432  
 step  
     Fl\_Counter, 335  
     Fl\_Spinner, 559  
     Fl\_Valuator, 637  
 str  
     FL\_CHART\_ENTRY, 308  
 submenu  
     Fl\_Menu\_Item, 473  
 substitute\_null\_characters  
     Fl\_Text\_Buffer, 584  
 suspended  
     Fl\_Timer, 627  
 swap  
     Fl\_Browser, 283  
 swap\_buffers  
     Fl\_Gl\_Window, 384  
 SYSTEM  
     Fl\_Preferences, 501  
 tab\_distance  
     Fl\_Text\_Buffer, 584  
 take\_focus  
     Fl\_Widget, 683  
 takesevents  
     Fl\_Widget, 684  
 test\_shortcut  
     fl\_events, 214  
     Fl\_Menu\_, 453  
     Fl\_Menu\_Item, 473  
     Fl\_Widget, 684  
 text

Fl\_Browser, 283  
Fl\_Check\_Browser, 312  
Fl\_Menu\_, 454  
Fl\_Text\_Buffer, 584  
text\_in\_rectangle  
    Fl\_Text\_Buffer, 584  
text\_range  
    Fl\_Text\_Buffer, 584  
textcolor  
    Fl\_Chart, 307  
    Fl\_File\_Chooser, 354  
    Fl\_Help\_View, 411  
    Fl\_Input\_, 433  
    Fl\_Menu\_, 454  
    Fl\_Spinner, 560  
    Fl\_Text\_Display, 603  
    Fl\_Tooltip, 632  
    Fl\_Value\_Input, 643  
    Fl\_Value\_Output, 648  
    Fl\_Value\_Slider, 651  
textfont  
    Fl\_Chart, 307  
    Fl\_File\_Chooser, 354, 355  
    Fl\_Help\_View, 412  
    Fl\_Input\_, 433  
    Fl\_Menu\_, 454  
    Fl\_Spinner, 560  
    Fl\_Text\_Display, 604  
    Fl\_Value\_Input, 643  
    Fl\_Value\_Output, 648  
    Fl\_Value\_Slider, 651  
textsize  
    Fl\_Chart, 307  
    Fl\_File\_Chooser, 355  
    Fl\_Help\_Dialog, 404  
    Fl\_Help\_View, 412  
    Fl\_Input\_, 433  
    Fl\_Menu\_, 454  
    Fl\_Spinner, 560  
    Fl\_Text\_Display, 604  
    Fl\_Value\_Input, 643, 644  
    Fl\_Value\_Output, 648  
    Fl\_Value\_Slider, 651  
thread\_message  
    fl\_multithread, 226  
title  
    Fl\_Help\_View, 412  
tooltip  
    Fl\_Widget, 684  
top  
    Fl\_Browser\_, 293  
topline  
    Fl\_Browser, 283  
    Fl\_Help\_View, 412  
type  
    Fl\_File\_Chooser, 355  
    Fl\_File\_Icon, 362  
    Fl\_Label, 443  
    Fl\_Spinner, 560  
    Fl\_Widget, 685  
uncache  
    Fl\_Bitmap, 267  
    Fl\_Image, 420  
    Fl\_Pixmap, 491  
    Fl\_RGB\_Image, 526  
    Fl\_Shared\_Image, 548  
unchecked  
    Fl\_Menu\_Item, 474  
undo  
    Fl\_Input\_, 433  
unhighlight  
    Fl\_Text\_Buffer, 584  
unlock  
    fl\_multithread, 226  
unsubstitute\_null\_characters  
    Fl\_Text\_Buffer, 585  
up\_down\_position  
    Fl\_Input\_, 433  
update  
    Fl\_Clock, 322  
update\_child  
    Fl\_Group, 400  
USER  
    Fl\_Preferences, 501  
user\_data  
    Fl\_Widget, 685  
val  
    FL\_CHART\_ENTRY, 308  
valid  
    Fl\_Gl\_Window, 384  
value  
    Fl\_Browser, 283  
    Fl\_Button, 298  
    Fl\_Check\_Browser, 312  
    Fl\_Choice, 318  
    Fl\_Clock\_Output, 325, 326  
    Fl\_Color\_Chooser, 331  
    Fl\_File\_Chooser, 355  
    Fl\_File\_Icon, 362  
    Fl\_File\_Input, 365  
    Fl\_Help\_Dialog, 405  
    Fl\_Help\_View, 412  
    Fl\_Input\_, 434  
    Fl\_Input\_Choice, 438  
    Fl\_Menu\_, 454, 455  
    Fl\_Menu\_Item, 474

**Fl\_Positioner**, 496  
**Fl\_Progress**, 516  
**Fl\_Scrollbar**, 540  
**Fl\_Spinner**, 561  
**Fl\_Tabs**, 564, 565  
**Fl\_Valuator**, 638  
**Fl\_Wizard**, 704  
**version**  
    Fl, 259  
**visible**  
    **Fl\_File\_Chooser**, 355  
    **Fl\_Help\_Dialog**, 405  
    **Fl\_Menu\_Item**, 474  
    **Fl\_Widget**, 686  
**VISIBLE\_FOCUS**  
    **Fl\_Widget**, 661  
**visible\_focus**  
    Fl, 259  
    **Fl\_Widget**, 686  
**visible\_r**  
    **Fl\_Widget**, 687  
**visual**  
    Fl, 259  
  
**w**  
    **Fl\_Help\_Dialog**, 405  
    **Fl\_Image**, 420  
    **fl\_screen**, 220  
    **Fl\_Widget**, 687  
**wait**  
    Fl, 260  
**warning**  
    group\_comdlg, 237  
**watch\_widget\_pointer**  
    **fl\_del\_widget**, 227  
**when**  
    **Fl\_Widget**, 688  
**window**  
    **Fl\_Widget**, 689  
**Windows handling functions**, 201  
**word\_end**  
    **Fl\_Text\_Buffer**, 585  
    **Fl\_Text\_Display**, 604  
**word\_start**  
    **Fl\_Text\_Display**, 604  
**wrap**  
    **Fl\_Input\_**, 434  
**wrap\_mode**  
    **Fl\_Text\_Display**, 604  
**wrap\_uses\_character**  
    **Fl\_Text\_Display**, 604  
**wrapped\_column**  
    **Fl\_Text\_Display**, 605  
**wrapped\_line\_counter**