Evri
Distribution Interface

Standard Label Design and Barcode Specification

Version: **1.6.6**
Dated: **30.06.25**

Copyright © Hermes Parcelnet LTD trading as Evri

Copyright

The information contained within this document is the property of Evri. This information is issued in confidence to the intended recipients only and must not be reproduced, used, or disclosed in whole or in part or given or otherwise communicated to any third party without the prior permission of Evri.

Disclaimer

Any advice given or statements or recommendations made shall not in any circumstances constitute or be deemed to constitute a warranty by Evri as to the accuracy of such advice, statements, or recommendations. Evri shall not be liable for any loss, expense, damage or claim arising out of the advice given or not given or statements made or omitted in connection with this document.

Document Control

Version	Author	Date	Summary
1.0	S Smith	26.05.17	
1.1	S Smith	12.02.18	
1.2	S Smith	27.02.18	Amended Label Layout
1.3	S Smith	31.07.18	Added Example Return Label
1.4	S Smith	07.02.19	Aligned with Barcode spec v1.3.3
1.5	S Smith	29.11.19	Confirmed round is mandatory if known.
1.5.1	M Mackulin	14.04.20	Minor update to show example of Food service Product Sections 2.2
1.5.2	S Smith	06.07.20	Added Mandatory sections for 2D and Notes for Delivery Label
1.5.3	S Smith	25.11.20	Added Play Logo
1.5.4	M Sagar	27.01.21	Added Returns Centre Id and contact to the 2D barcode
1.5.5	M Sagar	26.04.21	Removed return centre ID from the send 2D barcode and added to the return 2D barcode and aligned the 1.7 barcode spec to this document.
1.5.6	M Mackulin	10.11.21	Added Mandatory sections for 2D and Notes for Returns Label at request of Client Integration
1.5.7	M Mackulin	14.07.22	Rebranded document to Evri. Added Font Size Guidance section
1.5.8	S Labarere	24.11.22	Added examples of return labels with a customer reference barcode
1.5.9	M Painter	20.11.23	Added requirement for Return Label to include Sort Level 5 Type to propagate the NRC Sortation Zone ID onto the Label.
1.6	C Henry	18.01.24	Amended specification to a standardised format. Merged with Evri Parcel Barcode Specification to consolidate into one document.
1.6.1	C Henry	13.02.24	Minor correction to label attribute for Sort Level 2 Name.
1.6.2	C Henry	08.04.24	Revision to return label template and populating details for Sort Levels 3 and 4 if applicable.
1.6.3	C Elhage	28.08.24	Updates of 2D Barcode (ParcelShop ID) usage and samples for Deliver To Store and Return to store journey
1.6.4	C Henry	17.04.25	Added zones to return labels
1.6.5	C Elhage	28.04.25	Added details for Depot Returns.
1.6.6	S Smith	30.06.25	Add alphanumeric drop examples.

TABLE OF CONTENTS

Contents

Introduction 4
Client Integration Types 5
Barcodes 6
1D Barcode 6
1D Barcode Content 6
Calculating the Check Digit 7
1D Barcode Printing Requirements 8
Additional Information 9
2D Barcode 11
2D Barcode Content 12
Telephone Number Scrambling 22
2D Barcode Printing Requirements 23
Delivery Labels 24
UK Delivery (Outbound) Label Template 24
Populating the Delivery Label 25
Example UK Delivery (Outbound) Label 29
Example ParcelShop Label 30
Client Store Delivery Label 31
Example International Label 32
Font Size Guidance 33
Zebra Printer Form for Delivery Label 34
Evri Play Logo 35
Return Label 36
Return (Inbound) Label Template 36
Populating the Return Label 37
Example UK Return Label 40
Return label including a Customer Reference Barcode 41
Depot Returns Label (T3RS – Delivery Method 153) 42
Zebra Printer Form for Return Label 43
Zebra Printer Commands for Return Label with customer reference 44

Introduction

This document is intended to define the Label Format Template for Evri Clients or Integration Partners who wish to produce labels for Evri Delivery/Returns. This document also outlines the Evri primary 1D and 2D barcode specifications.

Evri uses a 16-digit alphanumeric 1D barcode and a 2D barcode on parcel labels to facilitate operational scanning and tracking throughout the network.

The 2D barcode is a representation of the existing parcel data in a flexible format that is typically presented by Clients in a pre-advice file or API request.

It should be noted that if the Evri parcel label is scanned within Client's own distribution operations (such as at a point of warehouse despatch or vehicle loading), then it is important to check that the equipment used can scan the different barcode symbologies listed in this document.

The standard label size for the Evri network is 100mm x 150mm.

Note: Any deviations from the Evri Standard label template MUST be approved by the Evri IT and Operations teams prior to injecting labels into the network.

Client Integration Types

There are typically two ways in which new and existing Clients integrate to Evri systems:

Client Hosted

- This is the term given to the integration method where a Client has internal IT systems and uses these to generate Evri barcodes and labels internally.
- The Client refers to the Evri POS file (Refer to **Evri Client Integration - EDI - POS Routing and Pre-advice** specification) for the routing data and to generate the label/barcode.
- These clients are responsible for managing the barcode sequence range in their own systems.

Evri Hosted (Direct Integration)

- This is the term given to the integration method where a Client has internal IT systems and has chosen to integrate with Evri systems via API for the purposes of parcel routing, barcode creation and labelling.
- Client integrates via Evri web service (Refer to **Evri Client Integration - API - Domestic and International Routing and Labels** specification) and the label/barcode data are returned. A PDF/ZPL version of the label can also be generated for printing (clients are responsible for printing their own labels).
- Clients that integrate this way receive the 1D barcode and 2D string in the label details data returned in API response.
- If the client takes the responsibility of designing their own labels (not using the PDF label returned by API), then they will need to construct the label with both the 1D and 2D barcodes on it from the data provided by Evri API response, using the symbology prescribed for each barcode.

Barcodes

1D Barcode

A 16-digit 1D non-routing barcode:

H-00IM-A-000730027-7

Origin	Client Id (base 36)	Sortation Indicator	Barcode Sequence Range	Check Digit
H	00IM	A	000000001	0

- This barcode is 16 digits long.
- The encoded Client ID allows Evri to have a significant number of clients.
- The whole barcode sequence range is available per client (not shared), meaning that the barcode sequence range does not need to be re-used quickly. This also simplifies the management of the sequence range, as it starts at 1 and ends at 999999999 for each client.
- The barcode is alphanumeric and utilises Code 128 a high-density alphanumeric barcode symbology.
- There is no dependency between barcode and network which means Evri can continue to expand the logistics network.

1D Barcode Content

Character(s)	Length	Use	Description
1	1	Origin of barcode generation	H – Evri Hosted. C – Evri Hosted C2C. T – Client Hosted.
2-5	4	Client ID (Encoded in Base 36)	Represents the Client ID of the company trading with Evri. Must include leading zeros as appropriate. e.g. Client ID 670 encoded into Base 36 is IM. Therefore, this would be populated as 00IM.
6	1	Sortation Indicator	A – Domestic Outbound. C – International Outbound. D – Return via NRC. E – Return via Northern Hub.
7-15	9	Barcode Sequence Range	Sequence range rolling from 1 to 999999999 for each client.
16	1	Check Digit	Modulo-10 checksum. See Notes

Calculating the Check Digit

The check digit applied to the Evri barcode will be a Modulo 10 type checksum, with the alphabetic characters being converted to numeric.

Use the following process to determine the value of the check digit:

1. Reference the alphabetic conversion table (below) to obtain the value of the alphabetic characters.
2. Sum the value of the even position characters.
3. Sum the value of the odd position characters and multiply by 2.
4. Add these together to get the checksum total.
5. Divide the checksum by 10. The remainder is equal to the check digit (if remainder is 10, then check digit is 0).

Alphabetic Conversion Table

A	B	C	D	E	F	G	H	I	J	K	L	M
2	3	4	5	6	7	8	9	0	1	2	3	4

N	O	P	Q	R	S	T	U	V	W	X	Y	Z
5	6	7	8	9	0	1	2	3	4	5	6	7

Worked Example

	H	0	0	I	M	A	0	0	0	0	0	0	0	0	1	total
Values	9	0	0	0	4	2	0	0	0	0	0	0	0	0	1	
Even		0		0		2		0		0		0		0		2
Odd x 2	18		0		8		0		0		0		0		2	28

Calculate the Checksum:
30 divided by 10 = 3, with a remainder of 0.
Therefore, the check digit equals "**0**".

1D Barcode Printing Requirements

Description	Requirement
Barcode Symbology	Code-128
Barcode Height	Minimum 20 mm
Barcode Width	Minimum 60mm
Wide Bar or Space Width	Minimum 1.270 mm
Narrow Bar or Space Width	Minimum 0.635 mm
Wide Bar/Space to Narrow Bar/Space Ratio	2:1 or 3:1
Quiet Zone (left and right of barcode)	Minimum 10 mm each end of the barcode
Quiet Zone (Top and Bottom of barcode)	Minimum 1.5 mm above and below the barcode

When printing the human readable Evri barcode number underneath the barcode, it should be formatted with hyphens after the 1st, 5th, 6th, and 15th numbers.

For example, barcode number H00IMA0000000010 should be printed as H-00IM-A-000000001-0.

Space required for the largest 1D barcode is 5.5 cm x 2.5 cm.

Additional Information

1D barcode Symbology

The primary barcode used for parcel labelling and identification is a 1D Code 128 barcode. Code 128 barcodes are compact, high-density codes used in logistics and transportation industries and as such provides excellent density for the representation of the Evri alphanumeric parcel identifier.

H-00IM-A-000730027-7

General details of Code 128

Code 128 is a variable length, high-density alphanumeric symbology.
Three different character subsets can be used within a Code 128 barcode to encode the data more efficiently.

Subset	Description
Subset A	The first sub-set encodes all uppercase and ASCII control characters.
Subset B	The second sub-set encodes all upper- and lower-case characters.
Subset C	The third sub-set encodes numeric digit pairs 00 through 99.

Each subset has its advantages. Each pattern can have different meanings depending upon which subset is used.

Evri UK requires **subset B** for the alphanumeric Parcel barcode. Subset B includes standard ASCII symbols, digits, upper and lower-case letters.

Make-up of the Code 128 Barcode

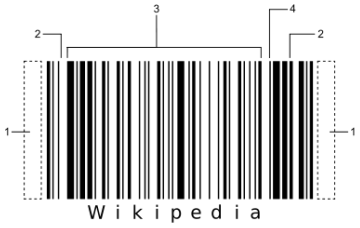

1. Quiet Zone
2. Start/Stop Symbols
3. Encoded data
4. Check digit

Quiet Zone
The minimum width of the Quiet Zone to the left and right of the 128 Bar Code is 10x, where x is the minimum width of a module. It is mandatory at the left and right side of the barcode.

Start/Stop Symbols
Special start characters tell the reader which of the character sets is initially being used and three special shift characters permit changing character sets within a bar code symbol.

Encoded Data
Contains the Evri parcel barcode reference.

Check Digit
Code 128 also employs an internal check digit for data security. This internal check digit is calculated by the bar code printing application. Each barcode reader also reads and re-calculates this check digit as part of the decode process. The internal check digit is separate from any human readable check digit that may be employed for manual data entry accuracy and does not become part of the data stream. For this reason, code 128 is referred to as a self-checking code.

2D Barcode

The secondary barcode is a 2D barcode containing shipment data.

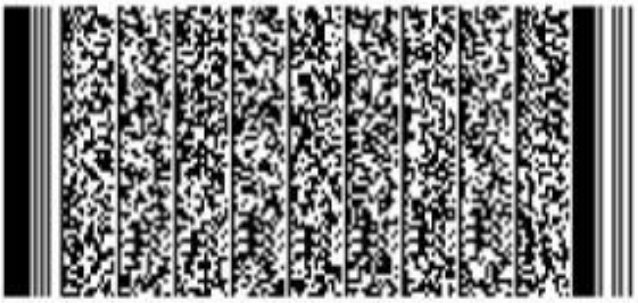

- The 2D barcode allows Evri to encode large amounts of data.
- The 2D barcode supports situations where parcel pre-advice is missing as the HHT can read the shipment details.
- In the event of operating with mobile signal issues or without a manifest, the 2D barcode can be used.
- PDF-417 is a high-density two-dimensional alphanumeric barcode symbology that consists of a series of stacked linear barcodes. The symbology can encode the entire 255-character ASCII data set.

2D Barcode Content

The data content of the Evri 2D PDF-417 barcode symbol is grouped into two categories:

- Mandatory data (M)
- Optional data (O)

Because PDF-417 is a 2-dimensional stacked symbology, it is not possible to illustrate the data content in the same way as with the 1D barcode symbol.

The structure adopted is flexible and allows for the future addition of other formatted data attributes when necessary.

Each 2D barcode consists of:

- A MESSAGE HEADER SYMBOL [)
- A SECTION SEPARATOR SYMBOL ++
- Formatted data text
- A DATA SEPARATOR SYMBOL ||
- A MESSAGE TRAILER SYMBOL (]

A message header containing sections of formatted data followed by a message trailer is considered a MESSAGE ENVELOPE.
More than one message envelope SHOULD NOT be used within the 2D barcode symbol.

The minimum mandatory data fields and separators result in string of approximately 225 characters (including message header, separators, and trailer), the specific string count being determined by the data contents.

If additional optional fields are completed this could produce a string of approximately 400 characters e.g. a delivery parcel with a return address which results in more data represented in the 2D barcode.

NOTE: The total number of characters in the 2D barcode, including message overhead, should ideally not exceed 800 characters as this may affect scan read rate.

By the nature of the PDF417 format the 2D symbol has more of a rectangular shape.

Content for an Outbound Label

Description	Mandatory/ Optional	Example	Typical Length	Max Length	Section is Mandatory/ Optional
Message Header	M	[)	2	2	M
Version	M	1.4	3	10	M
Section Separator	M	++	2	2	M
Barcode	M	H00IMA0000000010	16	16	M
Section Separator	M	++	2	2	M
Client Id	M	670	3	7	M
Data Separator (DS)	M	||	2	2	
Child Client Id	O	1	1	7	
Section Separator	M	++	2	2	M
Customer Ref 1	M	HTEST1	10	20	M
Data Separator (DS)	M	||	2	2	
Customer Ref 2	O	HTEST2	5	20	
Section Separator	M	++	2	2	M
Service List (1..10)	Repeating list	n/a	n/a	n/a	Optional if no Service Offers Required
Service Name	Mandatory for each service	NDAY	3	4	
Data Separator (DS)	Mandatory if more services in list	||	2	2	
Service Name	Mandatory for each service	POD	4	4	
Section Separator	M	++	2	2	M
Name	M	MR JOSEPH BLOGGS	20	32	M
Data Separator (DS)	M	||	2	2	
Address Line1	M	1 CAPITOL CLOSE	32	32	
Data Separator (DS)	M	||	2	2	
Address Line 2	O	MORLEY	32	32	
Data Separator (DS)	M	||	2	2	
Address Line 3	O	LEEDS	32	32	
Data Separator (DS)	M	||	2	2	
Address Line 4	O	WEST YORKSHIRE	32	32	
Data Separator (DS)	M	||	2	2	
Address Line 5	O		32	32	
Data Separator (DS)	M	||	2	2	
Address Line 6	O		32	32	
Data Separator (DS)	M	||	2	2	
Postcode	M	LS270WH	8	8	

Data Separator (DS)	M	||	2	2	
Country Code (ISO 3166-1 – 2 Digit Alpha)	M	GB	2	2	
Data Separator (DS)	M	||	2	2	
Contact	O	The notification contact for the customer. ** for internal use only	32	32	
Data Separator (DS)	M	||	2	2	
Mobile Phone No	O	+455822943537 (This should be scrambled – see notes)	11	15	
Data Separator (DS)	M	||	2	2	
SMS Alert Group	O	0001	4	4	
Data Separator (DS)	M	||	2	2	
Future Use	O	0	1	1	

Section Separator	M	++	2	2	M
Weight in grams (Integer)	M	1500	4	7	M
Data Separator (DS)	M	||	2	2	
Length in cm (Integer)	M	50	2	4	
Data Separator (DS)	M	||	2	2	
Width in cm (Integer)	M	20	2	4	
Data Separator (DS)	M	||	2	2	
Depth in cm (Integer)	M	100	3	4	
Data Separator (DS)	M	||	2	2	
Value in pence (Integer)	M	7927	4	9	
Data Separator (DS)	M	||	2	2	
Currency (ISO 4217)	M	GBP	3	3	
Data Separator (DS)	M	||	2	2	
Type	O	CAT	3	4	
Section Separator	M	++	2	2	M
Delivery Message	O	Leave in Shed	30	32	Optional if no Delivery Message Required
Section Separator	M	++	2	2	M
Delivery Method	M	004	3	3	M
Data Separator (DS)	M	||	2	2	
Courier Round ID	Mandatory if present (i.e. For Courier, Light and Large, Parcelshop, etc) This is a combination of sort level 1 (depot) and sort level 4 codes (c-round)	810010	6	6	
Data Separator (DS)	M	||	2	2	

ParcelShop ID	Mandatory for ParcelShop Deliveries The 2D barcode field (ParcelShop ID) will contain the Client Store ID for "Deliver to store" or the Tier 3 ID for "Depot Return". Client Store ID: 6 base-18 alphanumeric characters (0-9 & A,B,C,D,E,F,G,H) including the prefix "T" Location ID for Depot Return: 6 base-18 alphanumeric characters (0-9 & A,B,C,D,E,F,G,H) including the prefix "V"	ParcelShop example: S07770 Deliver To Store example: T00001 Depot Return example: V0F3SG	6	6	
Data Separator (DS)	M	||	2	2	
ParcelShop Name	Mandatory for ParcelShop Deliveries	Joe's Shop	30	30	
Data Separator (DS)	M	||	2	2	
Depot ID	M	81	2	2	
Data Separator (DS)	M	||	2	2	
Van Route ID	Mandatory if known	41	2	2	
Section Separator	M	++		2	
Client AR Link	O	http://www.hermes-europe.co.uk/AR/1234567890	50	50	O
Data Separator (DS)	M	||	2	2	
Customer AR Link	O	http://www.hermes-europe.co.uk/AR/0987654321	50	50	
Section Separator	M	++	2	2	M
Returns Name	O	RETURN NAME	20	32	Optional if Returns address is not required
Data Separator (DS)	M	||	2	2	
Returns Address Line 1	O	Evri NRC Returns	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line 2	O	Hamilton Way	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line 3	O	Off St Davids Way	32	32	

Data Separator (DS)	M	||	2	2	
Returns Address Line 4	O	Bermuda Park	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line 5	O	Nuneaton	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line 6	O	Address Line 6	32	32	
Data Separator (DS)	M	||	2	2	
Returns Postcode	O	CV10 7SD	8	8	
Data Separator (DS)	M	||	2	2	
Section Separator	M	++	2	2	M
Despatch Date (Date that parcel should leave you)	M	27122023 (in format DDMMYYYY)	10	10	M
Data Separator (DS)	M	||	2	2	
Delivery Date (Date that parcel should arrive at customer)	O	27122023 (in format DDMMYYYY)	10	10	
Message Trailer	M	(]	2	2	M

Example data content string (Parcelshop Delivery):

[)1.4++H00IMA0048827563++1234||++UKDomestic1-1||UKDomestic1-2++HSIG++Mr Joe Bloggs||My House||15 My Street||My Address Line 1||My Address Line 2||Leeds||West Yorkshire||LS27 9TE||GB||||27917885979||||++1000||50||50||20||5999||GBP||CAT++++135||100824||S07770||COSTCUTTER WA14||10||59++||++Dean Pearce||Evri Rugby Hub||Unit 1||Rugby Gateway||OverView Way||Rugby||Warwickshire||CV23 0WE||++18012024||(]

Example data content string (Courier Delivery):

[)1.4++H00IMA0048827638++1234||++UKDomestic1-1||++++Mr Joe Bloggs||15 My Street|||||||Leeds||West Yorkshire||LS27 0WH||GB|||||||++1000||50||50||20||5999||GBP||CAT++++004||150242|||||15||73++||++Dean Pearce||Hermes Parcelnet Rugby Hub||Unit 1||Rugby Gateway||OverView Way||Rugby||Warwickshire||CV23 0WE||++18012024||(]

The delivery method can be found using the following list:

Delivery Method Name	**Delivery Method**
COU-PNET	004
L&L-PNET	020
BFPO	023
C2B Returns	105
Parcelshop	135
EVRi Lockers	138
Depot Return	153
Parcelnet Address Correction	998
Relabel	999
Client Store Delivery	139

Content for an Inbound (Return) Label

Description	Mandatory or Optional	Example	Typical Length	Max Length	Section Mandatory or Optional
Message Header	M	[)	2	2	M
Version	M	1.4	3	10	Mandatory
Section Separator	M	++	2	2	M
Barcode	M	H00IMD0000000013			Mandatory
Section Separator	M	++	2	2	M
Client Id	M	1234	3	7	Mandatory
Data Separator (DS)	M	||	2	2	
Child Client Id	O	1	1	7	
Section Separator	M	++	2	2	M
Customer Ref1	O	Cust Ref 1	10	20	Mandatory
Data Separator (DS)	M	||	2	2	
Customer Ref2	O	Cust Ref 2	10	20	
Section Separator	M	++	2	2	M
Service List (1..10)	Repeating	Note for guidance	n/a	n/a	Optional if no service offers required
Service Name	Mandatory if service	MON	3	4	
Data Separator	Mandatory if >1 service	||	2	2	
Service Name	M	PKGL	4	4	
Section Separator	M	++	2	2	M
Name	O	MR JOE BLOGGS	20	32	Optional but ideally supplied
Data Separator (DS)	M	||	2	2	
addressLine1	O	1 THE STREET	32	32	
Data Separator (DS)	M	||	2	2	
addressLine2	O	THE SUBURB	32	32	
Data Separator (DS)	M	||	2	2	
addressLine3	O	THE TOWN	2	2	
Data Separator (DS)	M	||	2	2	
addressLine4	O	THE COUNTY	32	32	
Data Separator (DS)	M	||	2	2	
addressLine5	O		32	32	
Data Separator (DS)	M	||	2	2	
addressLine6	O		32	32	
Data Separator (DS)	M	||	2	2	

Postcode	O	LS27 0WH	7	8	Optional but ideally supplied (as above)
Data Separator (DS)	M	||	2	2	
Country Code (2 Digit) (ISO 3166-1 – 2 Digit Digit Alpha)	O	GB	2	2	
Data Separator (DS)	M	||	2	2	
Contact	O	Internal use only	32	32	
Data Separator (DS)	M	||	2	2	
Mobile Phone No	O	+455822943537 (This should be scrambled – see notes)	11	15	
Data Separator (DS)	M	||	2	2	
SMS Alert Group	O	0001	4	4	
Data Separator (DS)	M	||	2	2	
Section Separator	M	++	2	2	M
Weight in grams (Integer)	M	1000	4	7	Mandatory
Data Separator (DS)	M	||	2	2	
Length in cm	M	40	2	4	
Data Separator (DS)	M	||	2	2	
Width in cm (Integer)	M	20	2	4	
Data Separator (DS)	M	||	2	2	
Depth in cm (Integer)	M	100	3	4	
Data Separator (DS)	M	||	2	2	
Value in pence	M	1095	4	7	
Data Separator (DS)	M	||	2	2	
Currency (ISO 4217)	M	GBP	3	3	
Data Separator (DS)	M	||	2	2	
Type	O	ABC	3	4	
Section Separator	M	++	2	2	M
Delivery Message (return)	O	Collect from Porch	30	32	Optional if no message required
Section Separator	M	++	2	2	M
Delivery Method	M	105	3	3	Mandatory
Data Separator (DS)	M	||	2	2	
Data Separator (DS)	M	||	2	2	
Data Separator (DS)	M	||	2	2	
Data Separator (DS)	M	||	2	2	
Depot ID	M	34	2	2	
Data Separator (DS)	M	||	2	2	
Van Route ID	M	03	2	2	
Section Separator	M	++	2	2	M
Client AR Link	O	Reserved Future use	50	50	Optional (not applicable)
Data Separator (DS)	M	||	2	2	
Customer AR Link	O	Reserved Future use	50	50	
Section Separator	M	++			M
Returns Name	M	Fred Bloggs	20	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line 1	M	Evri Nuneaton Hub	32	32	
Data Separator (DS)	M	||	2	2	

Returns Address Line 2	O	Hamilton Way	32	32	Mandatory (Returns)
Data Separator (DS)	M	||	2	2	
Returns Address Line 3	O	Off St Davids Way	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line	O	Bermuda Park	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line	O	Nuneaton	32	32	
Data Separator (DS)	M	||	2	2	
Returns Address Line	O		32	32	
Data Separator (DS)	M	||	2	2	
Returns Postcode	M	CV10 7SD	8	8	
Data Separator (DS)	M	||	2	2	
Return Centre Id	O	CWL1	4	4	Optional ** Mandatory for Amazon
Section Separator	M	++	2	2	M
Despatch Date (Return) [Date that parcel should be collected]	M	01122018 (in format DDMMYYYY)	8	8	Mandatory
Data Separator (DS)	M	||	2		
Message Trailer	M	()	2	2	M

The delivery method can be found using the following list:

Delivery Method Name	**Delivery Method**
C2B Returns	105
COU-PNET	004 *
L&L-PNET	020 *

* Only used if raising a courier collection request to home.

Telephone Number Scrambling

The telephone number should be scrambled using the following logic:

1. The phone number should only contain numeric and + characters.
2. Using a repeating pattern of despatch date in YYYYMMDD format, add each numeric digit of the telephone number to the corresponding date digit (keeping the last digit if the sum > 10) to give a scrambled digit. The '+' character does not need to be scrambled.

e.g.

Date	2	0	2	3	1	2	2	7	2	0	2	3	1
Tel No	+	4	4	7	7	1	0	1	2	3	4	5	6
Scrambled	+	4	6	0	8	3	2	8	4	3	6	8	7

Notes

If a section is optional and you do not have requirements for the data in the fields in the section, then the section can be excluded i.e. You do not have to put anything between the section separators, e.g. ++++.

If no services are required then the services section can be excluded, e.g. ++++.
If one service is required then list should contain the service with no additional field separators, e.g. ++NDAY++.
If more than one service is required then the list should contain all services separated by the field separator, e.g. ++NDAY||HSIG++.

2D Barcode Printing Requirements

Description	Requirement
Barcode Symbology	PDF-417
Barcode Height	40mm
Barcode Width	Dependent on contents
Barcode Security (Error Correction Level)	5
Barcode Rows to encode	65
Barcode Columns to encode	Not specified
Barcode Truncate Right	No
Width to Height Ratio	2:1
Quiet Zone (left and right of barcode)	Minimum 10 mm each end of the barcode
Quiet Zone (Top and Bottom of barcode)	Minimum 1.5 mm above and below the barcode
ANSI Grade	B or higher

Space required for the largest barcode is 9.0 cm x 3.2 cm.

Delivery Labels

UK Delivery (Outbound) Label Template

The following template shows the required layout for an Evri UK Delivery Label:

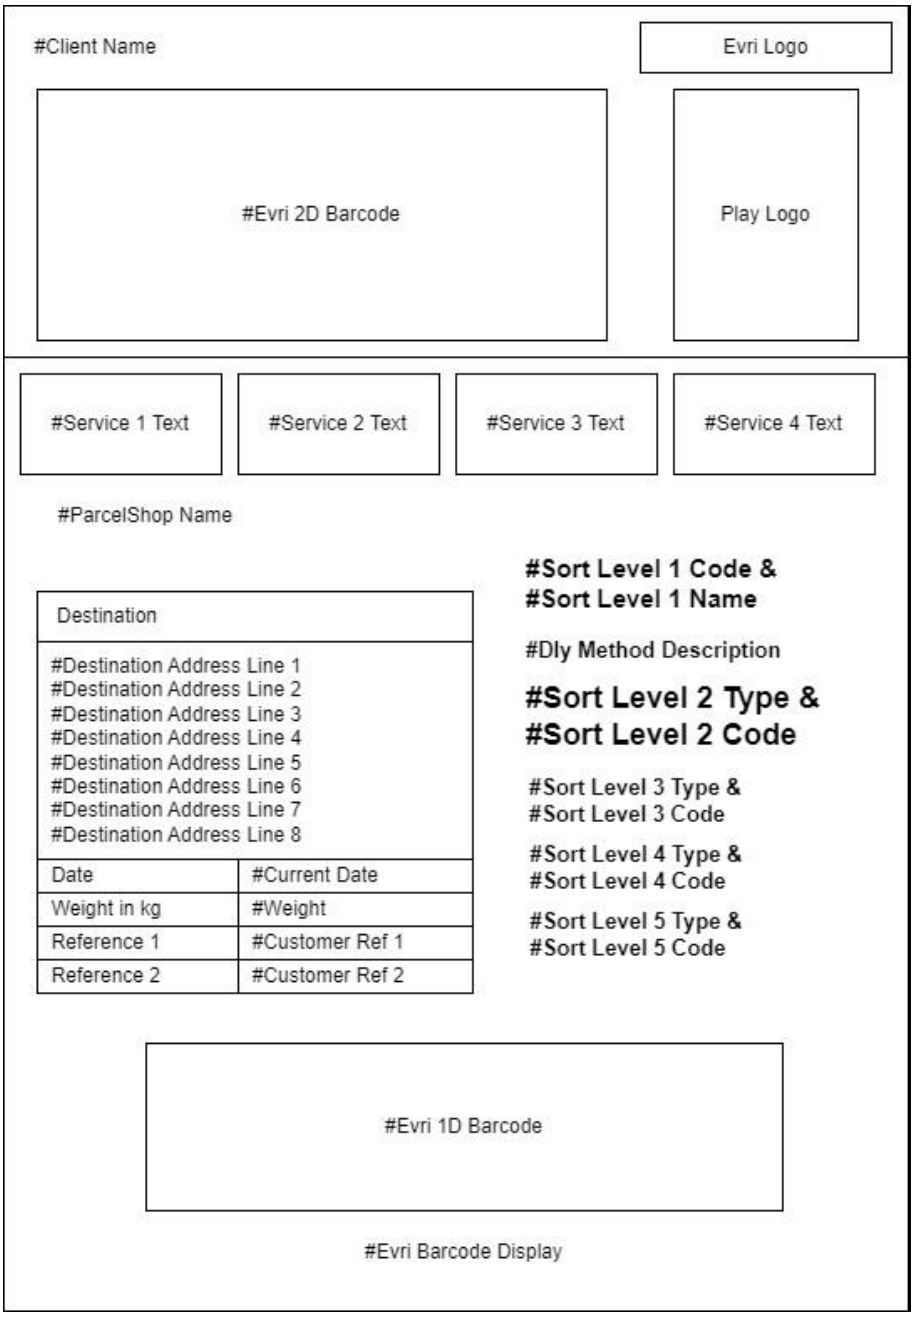

The template provides the layout for the label with place holders for data to be inserted based on the routing information and barcode generated when routing a delivery.

The standard label size is 100 mm x 150 mm.

Populating the Delivery Label

This section describes how to populate the label. All elements with a # in front are variables. All other text is fixed.

Font to be used: Arial

Client Name
Label attributes: #Client Name
This attribute will contain the name of the client (or the brand name if required).

Template Definition	Example
#Client Name	A UK Client

Evri 2D Barcode
Label attribute: #Evri 2D Barcode
The barcode symbology is PDF417. The security level is 5.

Space required for the largest 2D barcode is 9.0 cm x 3.2 cm.

Service Information
Label attribute: #Service 1 Text to #Service 4 Text
These four attributes will contain up to four services that have been requested for the delivery/collection.

The services available are:

Service	Description for Label
Stated Day - Monday	MON *collections only
Stated Day - Tuesday	TUE *collections only
Stated Day - Wednesday	WED *collections only
Stated Day - Thursday	THU *collections only
Stated Day - Friday	FRI *collections only
Stated Day - Saturday	SAT *collections only
Stated Day - Sunday	SUN *collections only
Stated Time – Morning	AM *not currently supported
Stated Time – Afternoon	PM *not currently supported
Stated Time – Evening	EVE *not currently supported
Stated Time – Midday	MIDD *not currently supported
Next Day Service	NDAY
Two Day Service	2DAY
Three Day Service	3DAY
Signature	POD
Household Signature	HSIG
PIN	CPIN
Fresh Food product	FOOD

e.g.

Template Definition	Example
#Service 1 Text	NDAY
#Service 2 Text	POD

#Service 3 Text	<blank>

Carrier logo

Fixed Label attribute: Evri Logo

The Evri Logo should be displayed at this location.

Template Definition	Example
Carrier Logo	EVRi

ParcelShop Name

Label attribute: #ParcelShop Name

If this is a label for the delivery of a parcel to a Parcelshop or Locker then this attribute should contain the name of the Parcelshop or Locker.

Template Definition	Example
Parcelshop Name	Joe's Parcelshop

Sort level information

Label attribute: Sort Level 1 Code

This attribute will contain the type of the destination depot.

Template Definition	Example
Sort Level 1 Code	81

Label attribute: Sort Level 1 Name

This attribute will contain the name of the destination depot.

Template Definition	Example
Sort Level 1 Name	BRAD

Label attribute: Dly Method Description

This attribute will contain the name of the delivery method.

Template Definition	Example
Dly Method Description	COU-PNET

Label attribute: Sort Level 2 Type

This attribute will contain the second level routing type.

Template Definition	Example
Sort Level 2 Type	VAN

Label attribute: Sort Level 2 Code

This attribute will contain the second level routing description.

Template Definition	Example
Sort Level 2 Code	A1

Label attribute: Sort Level 3 Type

This attribute will contain the third level routing type.

Template Definition	Example
Sort Level 3 Type	DROP

Label attribute: Sort Level 3 Code

This attribute will contain the third level routing description.

Template Definition	Example

Sort Level 3 Code	AA-01

Label attribute: Sort Level 4 Type
This attribute will contain the fourth level routing type.

Template Definition	Example
Sort Level 4 Type	P-ROUND

Label attribute: Sort Level 4 Code
This attribute will contain the fourth level routing description.

Template Definition	Example
Sort Level 4 Code	0010

Label attribute: Sort Level 5 Type
This attribute will contain the fifth level routing type.

Template Definition	Example
Sort Level 5 Type	SHOP-ID

Label attribute: Sort Level 5 Code
This attribute will contain the fifth level routing description.

Template Definition	Example
Sort Level 5 Code	S00770

Destination Address information
Label attributes: #Destination Address Line 1 - #Destination Address Line 8.
These eight attributes will contain up to eight address lines for the delivery, including customer name and postcode.

Template Definition	Example
#Destination Address Line 1	MR JOE BLOGGS
#Destination Address Line 2	1 THE STREET
#Destination Address Line 3	THE SUBURB
#Destination Address Line 4	THE TOWN
#Destination Address Line 5	THE COUNTY
#Destination Address Line 6	LS27 0WH

Additional Details
Label attribute: #Current Date
This attribute will contain the current date in the format YYYY-MM-DD

Template Definition	Example
#Date	2023-12-27

Label attribute: #Weight
This attribute will contain the weight of the parcel in kgs (to three decimal places)

Template Definition	Example
#Weight	1.250

Label attribute: #Customer Ref 1
This attribute will contain a reference supplied by the client.

Template Definition	Example
#Customer Ref 1	HTEST1

Label attribute: #Customer Ref 2
This attribute will contain a reference supplied by the client.

Template Definition	Example
#Customer Ref 2	HTEST2

Evri 1D Barcode
Label attribute: #Evri 1D Barcode
This attribute will contain the Evri Barcode. The barcode symbology is Code-128.

Template Definition	Example
#Evri Barcode	H00IMA0000000010

Space required for the largest 1D barcode is 5.5 cm x 2.5 cm.

Label attribute: #Evri Barcode Display
This attribute will contain the hyphenated man readable barcode number.

Template Definition	Example
#Evri Barcode Display	H-00IM-A-000000001-0

Example UK Delivery (Outbound) Label

Parcelnet

EVRi

NDAY POD

81 BRAD

COU-PNET

VAN 73

DROP 15

C-ROUND 5713

Destination
Mr Test Customer 1 Capitol Close Morley LS27 0WH

Date	2023-12-27
Weight in kg	1
Reference 1	HTEST1
Reference 2	HTEST2

H-00IM-A-000829814-4

Example ParcelShop Label

Client Store Delivery Label

Example International Label

Font Size Guidance

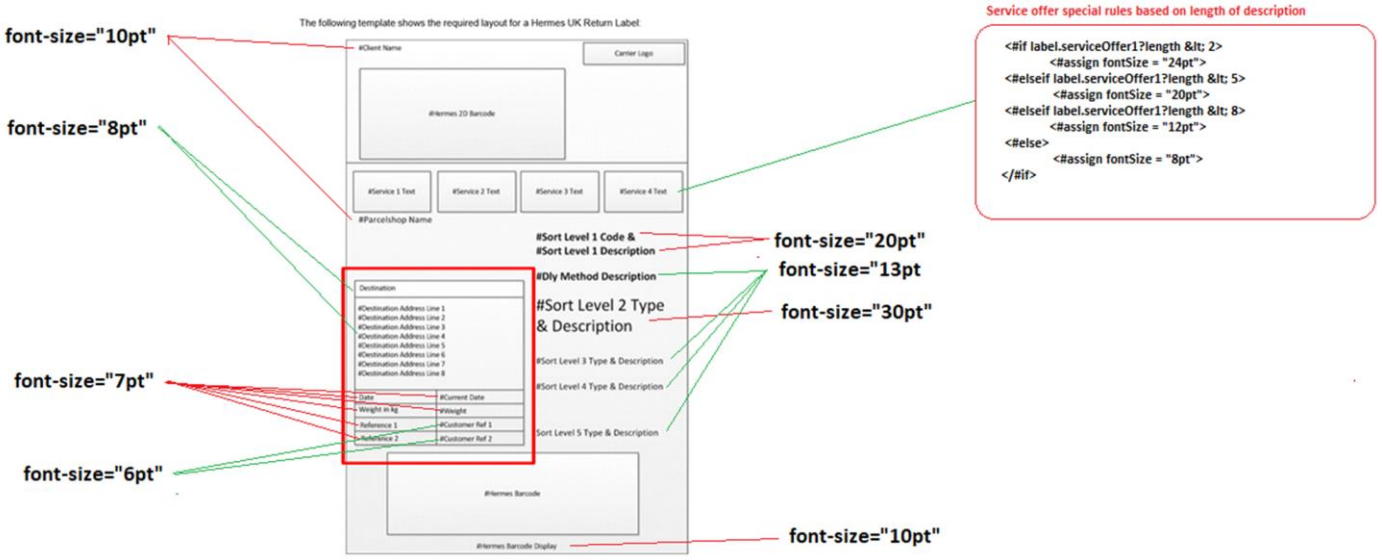

Attribute	Font Size
#Client Name	10pt
#ParcelShop Name	10pt
#Service 1 Text to #Service 4 Text	If less than 2 (char): 24pt If 2 to 4 (char): 20pt If 5 to 7 (char): 12pt Else: 8pt
Destination	8pt
#Destination Address 1 to Destination Address 8	8pt
Date	7pt
#Current Date	7pt
Weight in kg	7pt
#Weight	7pt
Reference 1	7pt
#Customer Ref 1	6pt
Reference 2	7pt
#Customer Ref 2	6pt
#Service Level 1 Code	20pt
#Service Level 1 Description	20 pt
#Sort Level 2 Type	30pt
#Sort Level 2 Description	30pt
#Dly Method Description	13pt
#Sort Level 3 Type	13pt
#Sort Level 3 Description	13pt
#Sort Level 4 Type	13pt
#Sort Level 4 Description	13pt
#Sort Level 5 Type	13pt
#Sort Level 5 Description	13pt
#Evri Barcode Display	10pt

Zebra Printer Form for Delivery Label

If you are using a zebra printer to print your labels, the following zebra printer form can be used.

```
^XA^DFR:PNETLABL.ZPL^FS
^FXCLIENT NAME^FS^FWN
^FO20,20^A0,30,30^FN1^FS
^FXHERMES 2D BARCODE^FS^FWN
^FO020,065^BY3,2^B7N,4,5,,65,N^FN2^FS
^FO610,020^A0,50,50^FDHERMES^FS
^FXSEPARATOR^FS^FWR
^FO000,340^GB800,2,2,B,0^FS
^FXSERVICES^FS^FWN
^FO25,365^A0,60,60^FN3^FS
^FO218,365^A0,60,60^FN4^FS
^FO411,365^A0,60,60^FN5^FS
^FO604,365^A0,60,60^FN6^FS
^FXNODE NAME^FS^FWN
^FO25,430^A0,40,40^FN7^FS
^FXADDRESS BOX^FS^FWR
^FO020,566^GB440,32,2,B,0^FS
^FO020,597^GB440,250,2,B,0^FS
^FO020,846^GB220,32,2,B,0^FS
^FO240,846^GB220,32,2,B,0^FS
^FO020,877^GB220,32,2,B,0^FS
^FO240,877^GB220,32,2,B,0^FS
^FO020,908^GB220,32,2,B,0^FS
^FO240,908^GB220,32,2,B,0^FS
^FO020,939^GB220,32,2,B,0^FS
^FO240,939^GB220,32,2,B,0^FS
^FXDESTINATION TITLE^FS^FWN
^FO25,572^A0,25,25^FDDestination^FS
^FXADDRESS LINES^FS^FWN
^FO25,607^A0,25,25^FN8^FS
^FO25,637^A0,25,25^FN9^FS
^FO25,667^A0,25,25^FN10^FS
^FO25,697^A0,25,25^FN11^FS
^FO25,727^A0,25,25^FN12^FS
^FO25,757^A0,25,25^FN13^FS
^FO25,787^A0,25,25^FN14^FS
^FO25,817^A0,25,25^FN15^FS
^FXENTITY LINES^FS^FWN
^FO25,852^A0,25,25^FDDate^FS
^FO245,852^A0,25,25^FN16^FS
^FO25,883^A0,25,25^FDWeight in kg^FS
^FO245,883^A0,25,25^FN17^FS
^FO25,914^A0,25,25^FD^FS
^FO245,914^A0,25,25^FN18^FS
^FO25,945^A0,25,25^FD^FS
^FO245,945^A0,25,25^FN19^FS
^FXSORT LEVELS^FS^FWN
^FO470,480^A0,60,60^FN20^FS
^FO470,550^A0,45,45^FN21^FS
^FO470,630^A0,100,100^FN22^FS
^FO470,760^A0,45,45^FN23^FS
^FO470,820^A0,45,45^FN24^FS
^FO470,920^A0,40,40^FN25^FS
^FXHERMES 1D BARCODE^FS^FWN
^FO90,990^BY3,2.7^BCN,200,N,N,N,N^FN26^FS
^FO222,1200^A0,30,30^FN27^FS
^XZ
```

Evri Play Logo

If you opt in to the Evri Play service, then you should print the Evri Play logo (below) on the label in the position as outlined in the template above.

The GF ZPL command can be used to print the bit map version of the label below, e.g.

^GF format, dataBytes, totalBytes, rowBytes, dataGraphic field

A typical ZPL image size on a label would be 253 x 138 @ 203 dpi

Return Label

Return (Inbound) Label Template

The following template shows the required layout for a Evri Return Label:

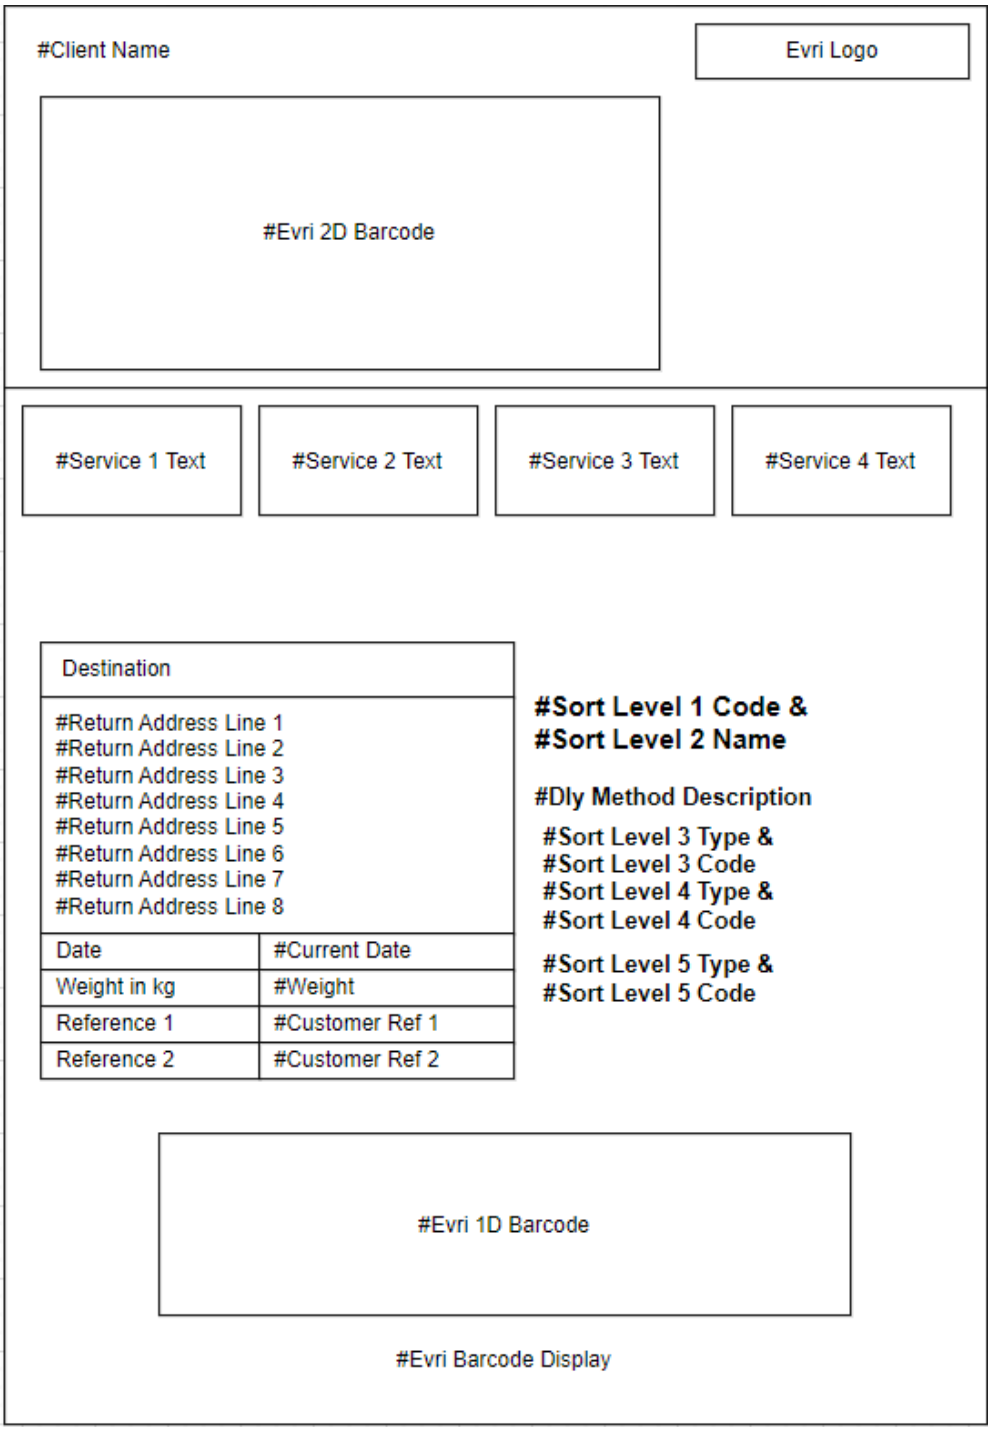

The template provides the layout for the label with place holders for data to be inserted based on the routing information and barcode generated when routing a delivery.

The standard label size is 100 mm x150 mm.

Populating the Return Label

This section describes how to populate the Return Label. All elements with a # in front are variables. All other text is fixed.

Font to be used: Arial

Client Name

Label attributes: #Client Name
This attribute will contain the name of the client or the brand name if required.

Template Definition	Example
#Client Name	A UK Client

Evri 2D Barcode

Label attribute: # Evri 2D Barcode
The barcode symbology is PDF417. The security level is 5.

Space required for the largest barcode is 9.0cm x 3.2cm

Service Information

Label attribute: #Service 1 Text - #Service 4 Text

The services available are:

Service	Description for Label
Stated Day - Monday	MON *collections only
Stated Day - Tuesday	TUE *collections only
Stated Day - Wednesday	WED *collections only
Stated Day - Thursday	THU *collections only
Stated Day - Friday	FRI *collections only
Stated Day - Saturday	SAT *collections only
Stated Day - Sunday	SUN *collections only
Packageless	PKGL * Client restricted

Carrier logo

Fixed Label attribute: Carrier Logo
The Evri Logo should be displayed at this location.

Template Definition	Example
Carrier Logo	EVRi

Sort level information

Label attributes: #Sort Level 1 Code, etc.
This attribute will contain the type of the destination depot.

Template Definition	Example
Sort Level 1 Code	34

Label attribute: #Sort Level 2 Name
This attribute will contain the name of the destination hub.

Template Definition	Example
Sort Level 2 Name	NRC

Label attribute: #Dly Method Description
This attribute will contain the name of the delivery method.

Template Definition	Example
Dly Method Description	C2B Return

Label attribute: Sort Level 3 Type
This attribute will contain the third level routing type.

Template Definition	Example
Sort Level 3 Type	

Label attribute: Sort Level 3 Code
This attribute will contain the third level routing description.

Template Definition	Example
Sort Level 3 Code	

Label attribute: Sort Level 4 Type
This attribute will contain the NRC sortation zone ID and, if value available, is mandatory for Returns (inbound)

Template Definition	Example
Sort Level 4 Type	ZONE

Label attribute: Sort Level 4 Code
This attribute will contain the fourth level routing description.

Template Definition	Example
Sort Level 4 Code	N0

Label attribute: Sort Level 5 Type
This attribute will contain the NRC sortation sub zone ID and, if value available, is mandatory for Returns (inbound)

Template Definition	Example
Sort Level 5 Type	SUB ZONE

Label attribute: Sort Level 5 Code
This attribute will contain the fourth level routing description.

Template Definition	Example
Sort Level 5 Code	15

Destination Address information

Label attributes: #Destination Address Line 1 - # Destination Address Line 8
These eight attributes will contain up to eight address lines for the collection address, including name and postcode.

Template Definition	Example
#Destination Address Line 1	Parcelnet

#Destination Address Line 2	Unit 1
#Destination Address Line 3	Rugby Gateway
#Destination Address Line 4	Overview Way
#Destination Address Line 5	Rugby
#Destination Address Line 6	Warwickshire
#Destination Address Line 7	CV23 0WE

Additional Details

Label attribute: #Current Date

This attribute will contain the current date in the format YYYY-MM-DD

Template Definition	Example
#Date	2023-01-15

1D Barcode

Label attribute: #EvriBarcode

This attribute will contain the Evri Barcode. The barcode symbology is Code-128.

Template Definition	Example
# Evri Barcode	H00IMD0000000013

Space required for the largest barcode is 5.5cm x 2.5cm

Label attribute: #EvriBarcode Display

This attribute will contain the hyphenated man readable barcode number text.

Template Definition	Example
# Evri Barcode Display	H-00IM-D-000000001-3

Depot Return (T3RS) Support

- Label must include `#deliveryMethodDescription = "Depot Return"`
- `SortLevel5` must reflect SME depot ID (e.g. "V0F3SG")

Example UK Return Label

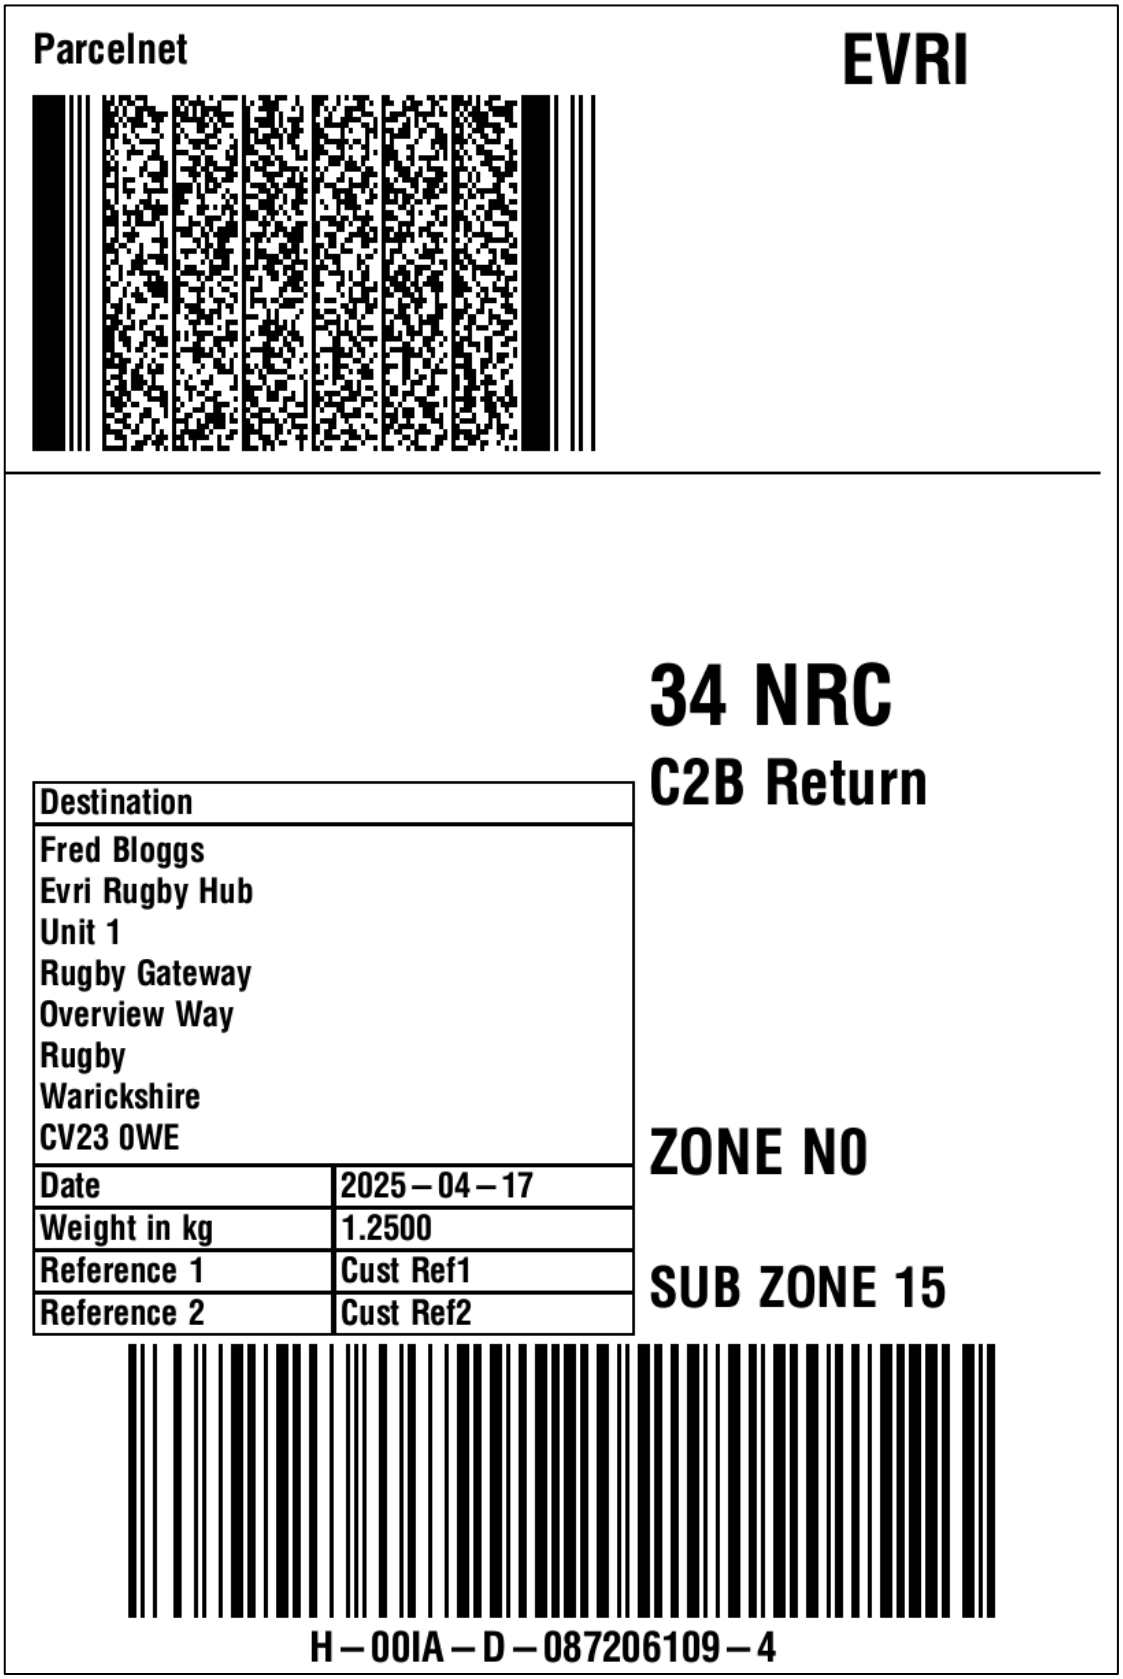

Return label including a Customer Reference Barcode

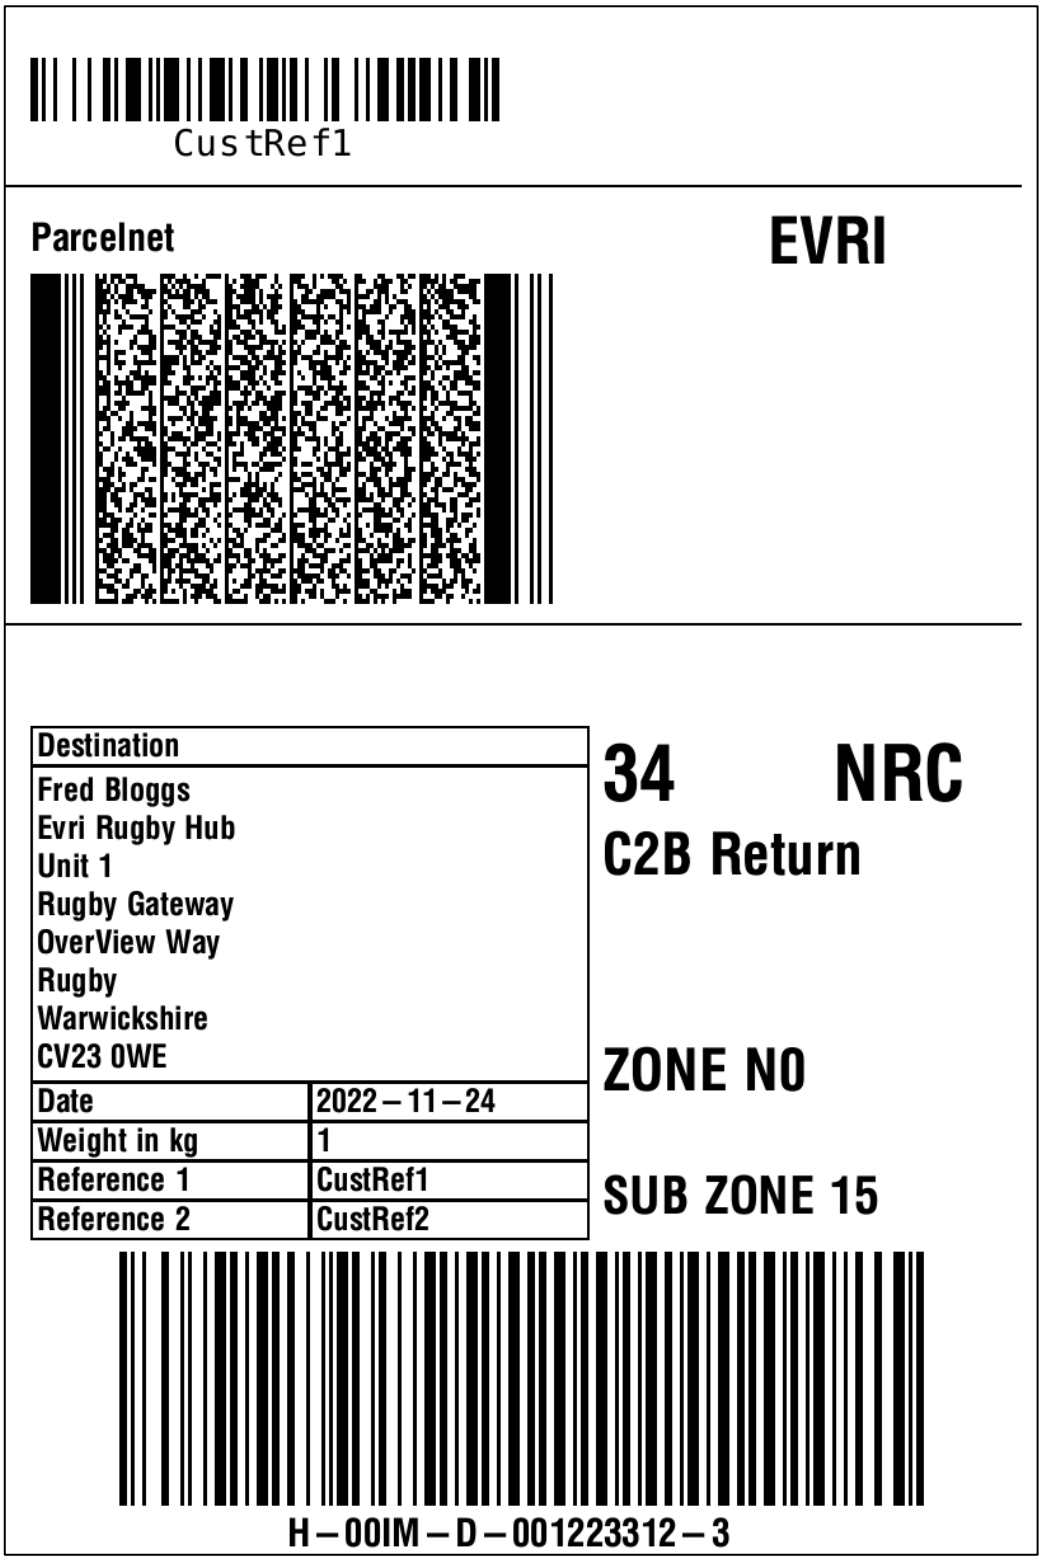

Depot Returns Label (T3RS – Delivery Method 153)

Sample label used for Depot Returns, where the parcel is routed via SME van network to a client depot node (`T3RS`). This label type uses:

- Delivery Method ID: 153
- Delivery Method Description: Depot Returns
- Label Type: Delivery (not Return)
- Sort Level 5: T3RS Node ID (Location ID)
- SME Manifest Routing (VAN / ROUND / DROP)
- Encoded routing info in the 2D barcode

Depot Return Label Example:

Copyright © Hermes Parcelnet LTD trading as Evri 2023

Zebra Printer Form for Return Label

If you are using a zebra printer to print your labels, the following zebra printer form can be used.

```
^XA
^DFR:PNETLABL.ZPL^FS
^LH0,0
^FXCLIENT NAME^FS^FWN
^FO20,20^A0,30,30^FN1^FS
^FX2D BARCODE^FS^FWN
^FO020,065^BY3,2^B7N,4,5,,65,N^FN2^FS
^FO610,020^A0,50,50^FDEVRI^FS
^FXSEPARATOR^FS^FWR
^FO000,340^GB800,2,2,B,0^FS
^FXSERVICES^FS^FWN
^FO25,365^A0,60,60^FN3^FS
^FO218,365^A0,60,60^FN4^FS
^FO411,365^A0,60,60^FN5^FS
^FO604,365^A0,60,60^FN6^FS
^FXNODE NAME^FS^FWN
^FO25,430^A0,40,40^FN7^FS
^FXADDRESS BOX^FS^FWR
^FO020,566^GB440,32,2,B,0^FS
^FO020,597^GB440,250,2,B,0^FS
^FO020,846^GB220,32,2,B,0^FS
^FO240,846^GB220,32,2,B,0^FS
^FO020,877^GB220,32,2,B,0^FS
^FO240,877^GB220,32,2,B,0^FS
^FO020,908^GB220,32,2,B,0^FS
^FO240,908^GB220,32,2,B,0^FS
^FO020,939^GB220,32,2,B,0^FS
^FO240,939^GB220,32,2,B,0^FS
^FXDESTINATION TITLE^FS^FWN
^FO25,572^A0,25,25^FDDestination^FS
^FXADDRESS LINES^FS^FWN
^FO25,607^A0,25,25^FN8^FS
^FO25,637^A0,25,25^FN9^FS
^FO25,667^A0,25,25^FN10^FS
^FO25,697^A0,25,25^FN11^FS
^FO25,727^A0,25,25^FN12^FS
^FO25,757^A0,25,25^FN13^FS
^FO25,787^A0,25,25^FN14^FS
^FO25,817^A0,25,25^FN15^FS
^FXENTITY LINES^FS^FWN
^FO25,852^A0,25,25^FDDate^FS
^FO245,852^A0,25,25^FN16^FS
^FO25,883^A0,25,25^FDWeight in kg^FS
^FO245,883^A0,25,25^FN17^FS
^FO25,914^A0,25,25^FDReference 1^FS
^FO245,914^A0,25,25^FN18^FS
^FO25,945^A0,25,25^FDReference 2^FS
^FO245,945^A0,25,25^FN19^FS
^FXSORT LEVELS^FS^FWN
^FO470,480^A0,60,60^FN20^FS
^FO470,550^A0,45,45^FN21^FS
^FO470,630^A0,100,100^FN22^FS
^FO470,760^A0,45,45^FN23^FS
^FO470,820^A0,45,45^FN24^FS
^FO470,920^A0,40,40^FN25^FS
^FX1D BARCODE^FS^FWN
```


Copyright © Hermes Parcelnet LTD trading as Evri 2023

```
^FO90,977^BY3,2.7^BCN,200,N,N,N,N^FN26^FS
^FO222,1187^A0,30,30^FN27^FS
^XZ
```

This is an example of a call to the above form passing in the variables:

```
^XA
^XFR:PNETLABL.ZPL
^FN1^FDParcelnet^FS
^FN2^FD[)1.3++H00IAD0872061094++670||++CustRef1||CustRef2++++||||||||||||LS270WH||GB||3||||++1000||50||50||20||5999||GBP||++++105||||
||||34||03++||++Fred Bloggs||Evri Rugby Hub||Unit 1||Rugby Gateway||OverView Way||Rugby||Warwickshire||CV23 0WE++2022-11-24||(]^FS
^FN3^FD^FS
^FN4^FD^FS
^FN5^FD^FS
^FN6^FD^FS
^FN7^FD^FS
^FN8^FDFred Bloggs^FS
^FN9^FDEvri Rugby Hub^FS
^FN10^FDUnit 1^FS
^FN11^FDRugby Gateway^FS
^FN12^FDOverview Way^FS
^FN13^FDRugby^FS
^FN14^FDWarickshire^FS
^FN15^FDCV23 0WE^FS
^FN16^FD2025-04-17^FS
^FN17^FD1.2500^FS
^FN18^FDCust Ref1^FS
^FN19^FDCust Ref2^FS
^FN20^FD34 NRC^FS
^FN21^FDC2B Return^FS
^FN22^FD^FS
^FN23^FD^FS
^FN24^FDZONE N0^FS
^FN25^FDSUB ZONE 15^FS
^FN26^FDH00IAD0872061094^FS
^FN27^FDH-00IA-D-087206109-4^FS
^XZ
```

Zebra Printer Commands for Return Label with customer reference

If you are using a zebra printer to print your labels, the following zebra printer code can be used. This example has all variables expanded within the code.

```
^XA
^CI28
^FO20,40^BY3^BCN,50,Y,N,N^FH^FDCustRef1^FS
^FXSEPARATOR^FS^FWR
^FO000,140^GB800,2,2,B,0^FS
^FXCLIENT NAME^FS^FWN
^FO20,170^A0,30,30^FH^FDParcelnet^FS
^FX2D BARCODE^FS^FWN
^FO020,210^BY3,2^B7N,4,5,,65,N^FH^FD[)1.3++H00IMD0012233123++670||++CustRef1||CustRef2++++||||||||||||LS270WH||GB||3||||++1000||50||50||
20||5999||GBP||++++105||||||||34||03++||++Fred Bloggs||Evri Rugby Hub||Unit 1||Rugby Gateway||OverView Way||Rugby||Warwickshire||CV23
0WE++2022-11-24||(]^FS
^FO600,165^A0,50,50^FDEVRI^FS
^FXSEPARATOR^FS^FWR
^FO000,485^GB800,2,2,B,0^FS
^FXSERVICES^FS^FWN
^FO25,365^A0,60,60^FD^FS
^FO218,365^A0,60,60^FD^FS
```


Copyright © Hermes Parcelnet LTD trading as Evri 2023

```
^FO411,365^A0,60,60^FD^FS
^FO604,365^A0,60,60^FD^FS
^FXNODE NAME^FS^FWN
^FO25,505^A0,40,40^FH^FD^FS
^FXADDRESS BOX^FS^FWR
^FO020,566^GB440,32,2,B,0^FS
^FO020,597^GB440,250,2,B,0^FS
^FO020,846^GB220,32,2,B,0^FS
^FO240,846^GB220,32,2,B,0^FS
^FO020,877^GB220,32,2,B,0^FS
^FO240,877^GB220,32,2,B,0^FS
^FO020,908^GB220,32,2,B,0^FS
^FO240,908^GB220,32,2,B,0^FS
^FO020,939^GB220,32,2,B,0^FS
^FO240,939^GB220,32,2,B,0^FS
^FXDESTINATION TITLE^FS^FWN
^FO25,572^A0,25,25^FDDestination^FS
^FXADDRESS LINES^FS^FWN
^FO25,607^A0,25,25^FH^FDFred Bloggs^FS
^FO25,637^A0,25,25^FH^FDEvri Rugby Hub^FS
^FO25,667^A0,25,25^FH^FDUnit 1^FS
^FO25,697^A0,25,25^FH^FDRugby Gateway^FS
^FO25,727^A0,25,25^FH^FDOverView Way^FS
^FO25,757^A0,25,25^FH^FDRugby^FS
^FO25,787^A0,25,25^FH^FDWarwickshire^FS
^FO25,817^A0,25,25^FH^FDCV23 0WE^FS
^FXENTITY LINES^FS^FWN
^FO25,852^A0,25,25^FDDate^FS
^FO245,852^A0,25,25^FH^FD2022-11-24^FS
^FO25,883^A0,25,25^FDWeight in kg^FS
^FO245,883^A0,25,25^FH^FD1^FS
^FO25,914^A0,25,25^FDReference 1^FS
^FO245,914^A0,25,25^FH^FDCustRef1^FS
^FO25,945^A0,25,25^FDReference 2^FS
^FO245,945^A0,25,25^FH^FDCustRef2^FS
^FXSORT LEVELS^FS^FWN
^FO470,580^A0,60,60^FH^FD34      NRC      ^FS
^FO470,650^A0,45,45^FH^FDC2B Return^FS
^FO470,630^A0,100,100^FD^FS
^FO470,760^A0,45,45^FD^FS
^FO470,820^A0,45,45^FDZONE N0^FS
^FO470,920^A0,40,40^FDSUB ZONE 15^FS
^FX1D BARCODE^FS^FWN
^FO090,980^BY3,2.7^BCN,200,N,N,N,N^FH^FDH00IMD0012233123^FS
^FO222,1190^A0,30,30^FH^FDH-00IM-D-001223312-3^FS
^LL1199^PW799
^XZ
```

Zebra Printer Form for Depot Returns (T3RS) label

```
^XA
^CI28
^LH0,0
^FO50,30^A0N,30,30^FDJoe Browns^FS
^FO600,30^A0N,30,30^FDEVRi^FS
^FO50,70^BY2
^BCN,100,Y,N,N
^FDH-00EG-A-001071368-7^FS
^FO50,180^A0N,30,30^FDJoe Browns T3RS^FS
^FO50,220^GB700,3,3^FS
^FO50,230^A0N,30,30^FD79 BEL^FS
^FO250,230^A0N,30,30^FDDepot Returns^FS
^FO50,270^A0N,50,50^FDVAN 18^FS
^FO50,330^A0N,30,30^FDDROP 03^FS
^FO300,330^A0N,30,30^FDT - ROUND 0672^FS
^FO50,370^A0N,30,30^FDSHOP ID V0020C^FS
```


Copyright © Hermes Parcelnet LTD trading as Evri 2023

^FO50,420^GB700,3,3^FS
^FO50,430^A0N,25,25^FDDestination^FS
^FO50,460^A0N,25,25^FDJoe Browns T3RS^FS
^FO50,485^A0N,25,25^FD1 Store Street^FS
^FO50,510^A0N,25,25^FDWest Yorkshire^FS
^FO50,535^A0N,25,25^FDGB^FS
^FO50,560^A0N,25,25^FDEC1A 1BB^FS
^FO400,560^A0N,25,25^FDDate^FS
^FO400,585^A0N,25,25^FD2025-03-19^FS
^FO600,560^A0N,25,25^FDWeight in kg^FS
^FO600,585^A0N,25,25^FD10^FS
^FO50,640^BY2
^BCN,100,Y,N,N
^FDH-00EG-A-001071368-7^FS
^XZ

Copyright © Hermes Parcelnet LTD trading as Evri 2023