

1.Introduction to Computer Hardware

Identify major components of a computer such as Mother board, Daughter cards, Bus slots, SMPS, Internal storage devices, Interfacing Ports.


Physical identification of major components of a computer system such as motherboard, RAM modules, daughter cards, bus slots, SMPS, internal storage devices, interfacing ports. Specifications of desktop and server class computers. Installation of common operating systems for desktop and server use. (Students may be asked to formulate specifications for a computer to be used as a Desktop, Web server.)

MOTHERBOARD

A motherboard (also called mainboard, main circuit board, or mobo) is the main printed circuit board (PCB) in general-purpose computers and other expandable systems. It holds and allows communication between many of the crucial electronic components of a system, such as the central processing unit (CPU) and memory, and provides connectors for other peripherals.

Unlike a backplane, a motherboard usually contains significant sub-systems, such as the central processor, the chipset's input/output and memory controllers, interface connectors, and other components integrated for general use.

Motherboard means specifically a PCB with expansion capabilities. As the name suggests, this board is often referred to as the "mother" of all components attached to it, which often include peripherals, interface cards, and daughterboards: sound cards, video cards, network cards, host bus adapters, TV tuner cards, IEEE 1394 cards, and a variety of other custom components.

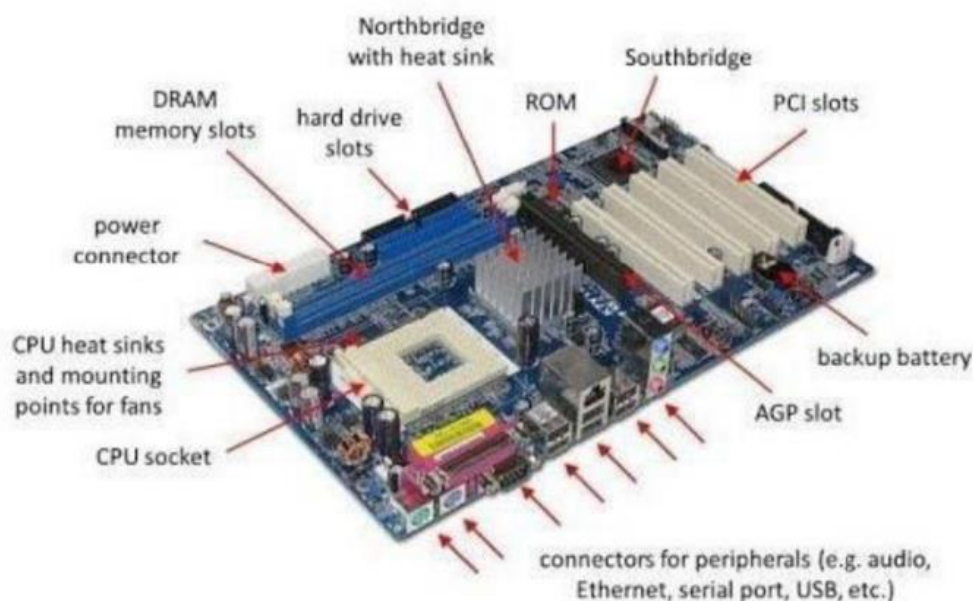

RAM MODULES

In computing, a memory module or RAM (random-access memory) stick is a printed circuit board on which memory integrated circuits are mounted. Memory modules permit easy installation and replacement in electronic systems, especially computers such as personal computers, workstations, and servers. The first memory modules were proprietary designs that were specific to a model of computer from a specific manufacturer. Later, memory modules were standardized by organizations such as JEDEC and could be used in any system designed to use them.

Types of memory modules include:

- TransFlash Memory Module
- SIMM, a single in-line memory module
- DIMM, dual in-line memory module
- Rambus memory modules (subset of DIMMs, normally referred to as RIMMs)
- SO-DIMM, small outline DIMM, a smaller version of the DIMM, used in laptops

Distinguishing characteristics of computer memory modules include voltage, capacity, speed (bit rate), and form factor. For economic reasons, the large (main) memories found in personal computers, workstations, and non-handheld game consoles (such as PlayStation and Xbox) normally consist of dynamic RAM (DRAM). Other parts of the computer, such as cache memories, normally use static RAM (SRAM). Small amounts of SRAM are sometimes used in the same package as DRAM. However, since SRAM has high leakage power and low density, die-stacked DRAM has recently been used for designing multi-megabyte-sized processor caches.



DAUGHTER BOARD

The daughter board is a computer hardware component. It is also known as the piggyback board, riser card, daughter board, daughter card, or daughter card. A daughter board is a printed circuit board that is connected to the motherboard or expansion card. As compared to the motherboard, it is smaller in size.

A daughter board does not act as an expansion card. An expansion card adds extra new functions to the computer, but a daughter board that is connected to the motherboard adds or supports the main functions of the motherboard.

Daughter boards are directly connected to the motherboard. Expansion cards are connected to the motherboard using the bus and other serial interfaces, but daughter boards are directly connected to the board by soldering. As an update of the motherboard or expansion card, daughter boards are released to extend the features and services of the motherboard or expansion cards.



BUS SLOTS

Alternatively known as a bus slot or expansion port, an expansion slot is a connection or port inside a computer on the motherboard or riser card. It provides an installation point for a hardware expansion card to be connected, which provides additional features to a computer such as video, sound, advanced graphics, Ethernet, or memory.

The expansion card has an edge connector that fits precisely into the expansion slot as well as a row of contacts that is designed to establish an electrical connection between

the motherboard and the electronics on the card, which are mostly integrated circuits. Depending on the form factor of the case and motherboard, a computer system generally can have anywhere from one to seven expansion slots. With a backplane system, up to 19 expansion cards can be installed.

Expansion cards can provide various functions including:

- Sound
- Modems
- Solid-state drive
- Network
- Power-on self-test
- Interface adapters
- Advanced multirate codec
- TV and radio tuning
- Basic input/output system (BIOS)
- Video processing
- Host adapting such as redundant array of independent disks or small computer system interface
- Expansion read-only memory (ROM)
- Security devices
- RAM memory



SMPS

A switched-mode power supply (SMPS) is an electronic circuit that converts power using switching devices that are turned on and off at high frequencies, and storage components such as inductors or capacitors to supply power when the switching device is in its non-conduction state.

Switching power supplies have high efficiency and are widely used in a variety of electronic equipment, including computers and other sensitive equipment requiring a stable and efficient power supply.

A switched-mode power supply is also known as a switch-mode power supply or switching-mode power supply.

Switched-mode power supplies are classified according to the type of input and output voltages. The four major categories are:

- AC to DC
- DC to DC
- DC to AC
- AC to AC

A basic isolated AC to DC switched-mode power supply consists of:

- Input rectifier and filter
- Inverter consisting of switching devices such as MOSFETs
- Transformer
- Output rectifier and filter
- Feedback and control circuit



INTERNAL STORAGE DEVICES




A storage unit is a part of the computer system that is employed to store the information and instructions to be processed. A storage device is an integral part of the computer hardware that stores information/data to process the result of any computational work.

Without a storage device, a computer would not be able to run or even boot up. Or in other words, we can say that a storage device is hardware that is used for storing, porting, or extracting data files. It can also store information/data both temporarily and permanently. Computer storage is of two types:

- **Primary Storage Devices:** Also known as internal memory and main memory. This is a section of the CPU that holds program instructions, input data, and intermediate results. It is generally smaller in size. RAM (Random Access Memory) and ROM (Read Only Memory) are examples of primary storage.
- **Secondary Storage Devices:** Secondary storage is a memory that is stored externally to the computer. It is mainly used for permanent and long-term storage of programs and data. Examples include Hard Disk, CD, DVD, Pen/Flash drive, SSD, etc.

INTERFACING PORTS

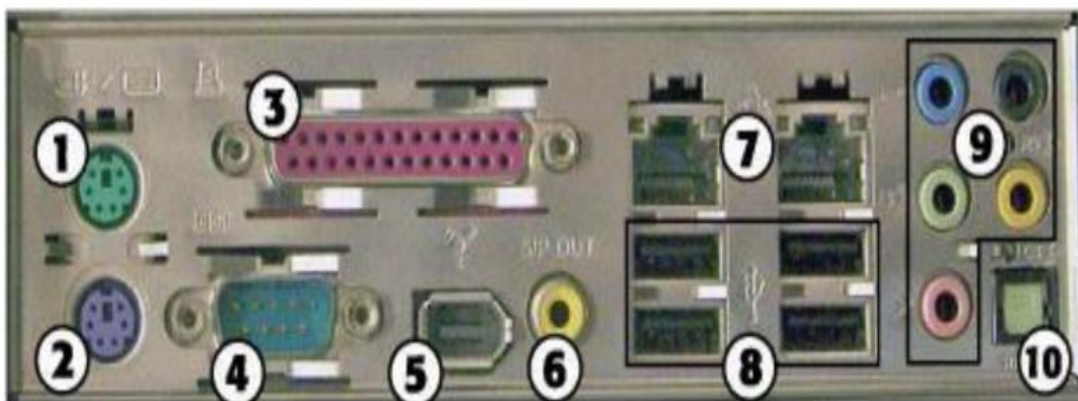

1. PS/2 mouse port
2. PS/2 keyboard port
3. Parallel port
4. Serial port
5. IEEE 1394a port
6. SPDIF coaxial digital audio port
7. Ethernet ports
8. USB ports
9. 1/8-inch mini-jack audio ports
10. SPDIF optical digital audio port

A **port** is a physical docking point used to connect external devices to the computer. It acts as an interface between the computer and external devices like hard drives and printers.

Characteristics of Ports:

- External devices are connected to a computer using cables and ports.
- Ports are slots on the motherboard into which a cable of an external device is plugged.
- Examples of external devices attached via ports: mouse, keyboard, monitor, microphone, speakers, etc.

2.Basic Linux Commands

Study of a terminal based text editor such as Vim or Emacs. (By the end of the course, students are expected to acquire following skills in using the editor: cursor operations, manipulate text, search for patterns, global search and replace)

Basic Linux commands, familiarity with following commands/operations expected

1. man
2. ls, echo, read
3. more, less, cat,
4. cd, mkdir, pwd, find
5. mv, cp, rm ,tar
6. wc, cut, paste
7. head, tail, grep, expr
8. chmod, chown
9. Redirections & Piping
10. useradd, usermod, userdel, passwd
11. df,top, ps
12. ssh, scp, ssh-keygen, ssh-copy-id

1. man :by using this command you can easily learn how to use

```
mits@mits-H610M-H-V2-DDR4:~$ man ls
```

NAME

ls - list directory contents

SYNOPSIS

ls [OPTION]... [FILE]...

DESCRIPTION

List information about the FILES (the current directory by default). Sort entries alphabetically if none of -cftuvSUX nor --sort is specified.

Mandatory arguments to long options are mandatory for short options too.

-a, --all

do not ignore entries starting with .

-A, --almost-all

do not list implied . and ..

--author

with -l, print the author of each file

-b, --escape

print C-style escapes for nongraphic characters

--block-size=SIZE

with -l, scale sizes by SIZE when printing them; e.g., '--block-size=M'; see SIZE format below

- B, --ignore-backups
do not list implied entries ending with ~
- c with -lt: sort by, and show, ctime (time of last modification of file status information); with -l: show ctime and sort by name; otherwise: sort by ctime, newest first
- C list entries by columns

2. ls, echo, read

ls: The ls command is used to view the contents of a directory. By default, this command will display the contents of your current working directory. If you want to see the content of other directories, type ls and then the directory's path.

```
mits@mits-H610M-H-V2-DDR4:~$ ls
```

```
document.docx document.pdf india snap
```

There are variations you can use with the ls command:

- ls -R will list all the files in the sub-directories as well
mits@mits-H610M-H-V2-DDR4:~\$ ls -R
.:
document.docx document.pdf india snap
- ls -l – long listing
mits@mits-H610M-H-V2-DDR4:~\$ ls -l
total 252
-rw-rw-r-- 1 mits mits 26431 Feb 5 11:36 document.docx
-rw-rw-r-- 1 mits mits 218271 Feb 5 10:16 document.pdf
-rw-rw-r-- 1 mits mits 454 Feb 5 10:48 india
drwx----- 4 mits mits 4096 Feb 5 10:08 snap
- ls -a will show the hidden files
mits@mits-H610M-H-V2-DDR4:~\$ ls -a
. .bash_logout .config .fontconfig .lessht .mca.swp
.profile .sudo_as_admin_successful
.. .bashrc document.docx .gnupg .local .mca.txt.swp
snap .thunderbird
.bash_history .cache document.pdf india .~lock.document.docx#
.mozilla .ssh
- ls -al will list the files and directories with detailed information like the permission, size, owner, etc.

```
mits@mits-H610M-H-V2-DDR4:~$ ls -al
total 364
-rw-rw-r-- 1 mits mits 84 Feb 5 11:36 ~/.lock.document.docx#
-rw----- 1 mits mits 12288 Apr 15 2024 .mca.swp
-rw----- 1 mits mits 12288 Apr 15 2024 .mca.txt.swp
drwx----- 3 mits mits 4096 Oct 10 15:30 .mozilla
-rw-r--r-- 1 mits mits 807 Jan 24 2024 .profile
drwx----- 4 mits mits 4096 Feb 5 10:08 snap
drwx----- 2 mits mits 4096 Mar 4 2024 .ssh
-rw-r--r-- 1 mits mits 0 Jan 24 2024 .sudo_as_admin_successful
drwx----- 6 mits mits 4096 Oct 10 15:30 .thunderbird
```

- `ls -t` lists files sorted in the order of “lastmodified”
mits@mits-H610M-H-V2-DDR4:~\$ `ls -t`
document.docx india document.pdf snap
- `ls -r` option will reverse the natural sorting order. Usually used in combination with other switches such as `ls -tr`. This will reverse the time-wise listing.
mits@mits-H610M-H-V2-DDR4:~\$ `ls -r`
snap india document.pdf document.docx

echo: echo command is used to move some data into a file. If you want to add the text, “Hello, my name is John” into a file called name.txt, you would type `echo Hello, my name is John >> name.txt`. `head`.

```
mits@mits-H610M-H-V2-DDR4:~$ echo "god is love"
god is love
mits@mits-H610M-H-V2-DDR4:~$ echo -e "god\nis\nlove"
god
is
love
```

read: read the contents of a line into a variable. The read command can be used with and without arguments. read command is used to read [options] [name...] . `$read $read var1 var2 var3. $echo "[$var1] [$var2] [$var3]`.

```
mits@mits-H610M-H-V2-DDR4:~$ echo "Enter your name:"; read;
Enter your name:
Gokul
mits@mits-H610M-H-V2-DDR4:~$ echo "Enter your name:"; read name;
echo "hello" $name;
Enter your name:
gokul
```

hello Gokul

3. more, less, cat

more: Like cat command, more command displays the content of a file. Only difference is that, in case of larger files, cat command output will scroll off your screen while more command displays output one screenful at a time. Enter key

```
mits@mits-H610M-H-V2-DDR4:~$ more -p india
```

```
india is my country
i love my country
all indians are my brothers and sisters
india, officially the Republic of India,[j][20] is a country in South Asia.
It is the seventh-largest country by area
since its independence in 1947, the world's most populous democracy
Bounded by the Indian Ocean on the south
he Arabian Sea on the southwest
Bay of Bengal on the southeast
shares land borders with Pakistan to the west
China, Nepal, and Bhutan to the north
```

less: The 'less' command is same as 'more' command but include some more features. It automatically adjusts with the width and height of the terminal window, while 'more' command cuts the content as the width of the terminal window get shorter

```
mits@mits-H610M-H-V2-DDR4:~$ less india
```

```
india is my country
i love my country
all indians are my brothers and sisters
india, officially the Republic of India,[j][20] is a country in South Asia.
It is the seventh-largest country by area
since its independence in 1947, the world's most populous democracy
Bounded by the Indian Ocean on the south
he Arabian Sea on the southwest
Bay of Bengal on the southeast
shares land borders with Pakistan to the west
China, Nepal, and Bhutan to the north
india (END)
```

Cat:cat (short for concatenate) is one of the most frequently used commands in Linux. It is used to list the contents of a file on the standard output stdout . To run this command, type cat followed by the file's name and its extension.

```
mits@mits-H610M-H-V2-DDR4:~$ cat > india
```

```
india is my country
```

```
i love my country
```

```
all indians are my brothers and sisters
```

```
india, officially the Republic of India,[j][20] is a country in South Asia.
```

```
^C
```

```
mits@mits-H610M-H-V2-DDR4:~$ cat india
```

```
india is my country
```

```
i love my country
```

```
all indians are my brothers and sisters
```

```
india, officially the Republic of India,[j][20] is a country in South Asia
```

```
mits@mits-H610M-H-V2-DDR4:~$ cat -n india
```

```
1 india is my country
```

```
2 i love my country
```

```
3 all indians are my brothers and sisters
```

```
india, officially the Republic of India,[j][20] is a country in South Asia.
```

4. cd, mkdir, pwd, find

cd :To navigate through the Linux files and directories, use the cd .It requires either the full path or the name of the directory, depending on the current working directory that you're in.

```
mits@ mits-H610M-H-V2-DDR4:~$ cd s1mca
```

```
mits@mits-H610M-H-V2-DDR4:~/s1mca$ cd s2mca
```

```
mits@mits-H610M-H-V2-DDR4:~/s1mca/s2mca$ cd ..
```

```
mits@mits-H610M-H-V2-DDR4:~/s1mca$ cd ..
```

```
mits@ mits-H610M-H-V2-DDR4:~$
```

mkdir : Use mkdir command to make a new directory — if you type mkdir Music it will create a directory called Music.To generate a new directory inside another directory, use this Linux basic command

```
mits@mits-H610M-H-V2-DDR4:~$ ls
```

```
document.docx f1 india kerala linux text snap
```

```
mits@mits-H610M-H-V2-DDR4:~/$ mkdir s1mca
```

```
mits@mits-H610M-H-V2-DDR4:~/$ mkdir s2mca
```

```
mits@mits-H610M-H-V2-DDR4:~$ ls
```

```
document.docx f1 india kerala linux text snap s1mca s2mca
```

pwd (Print Working Directory): Use the pwd command to find out the path of the current working directory (folder) you're in. The command will return an absolute (full) path, which is basically a path of all the directories that starts with a forward slash (/). An example of an absolute path is /home/username.

```
mits@mits-H610M-H-V2-DDR4:~$ pwd
/home/mits
```

find: Similar to the locate command, using find also searches for files and directories. The difference is, you use the find command to locate files within a given directory. As an example, find /home/ -name notes.txt command will search for a file called notes.txt within the home directory and its subdirectories. Other variations when using the find are: To find files in the current directory use, find . -name notes.txt. To look for directories use, / -type d -name notes. txt.

```
mits@mits-H610M-H-V2-DDR4:~$ find ~ -name "india"
/home/mits/india
mits@mits-H610M-H-V2-DDR4:~$ find . -name "*.txt"
./sample.txt
./file1.txt
./file2.txt
```

5. mv, cp, rm ,tar

mv : The primary use of the mv command is to move files, it can also be used to rename files. The arguments in mv are similar to the cp command. You need to type mv, the file's name, and the destination's directory. mv file.txt

/home/username/Documents .To rename files, the Linux is mv oldname.ext newname.ext.

```
mits@mits-H610M-H-V2-DDR4:~/s2mca$ ls
apple f1 linux new orange
mits@mits-H610M-H-V2-DDR4:~/s2mca$ mv f1 f2
mits@mits-H610M-H-V2-DDR4:~/s2mca$ ls
apple f2 linux new orange
```

cp : cp command issued to copy files from the current directory to a different directory. For instance, the command cp scenery.jpg

/home/username/Pictures would create a copy of scenery.jpg (from your current directory) into the Pictures directory. cp -i will ask for user's consent in case of a potential file overwrite. cp -p will preserve source files' mode, ownership and timestamp. cp -r will copy directories recursively. cp -u copies files only if the

destination file is not existing or the source file is newer than the destination file.

```
mits@mits-H610M-H-V2-DDR4:~/gokul$ ls
file1
mits@mits-H610M-H-V2-DDR4:~/gokul$ cp file1 file2
mits@mits-H610M-H-V2-DDR4:~/gokul$ ls
file1 file2
```

rm : The rm command is used to delete directories and the contents within them. If you only want to delete the directory —as an alternative to rmdir — use rm -r. Be very careful with this command and double-check which directory you are in. This will delete everything and there is no undo. To remove a file use rm filename.

```
mits@mits-H610M-H-V2-DDR4:~$ ls
document.docx grapes india kerala linuxtext mca mint s2mca snap yellow
mits@mits-H610M-H-V2-DDR4:~$ rm mca
rm: cannot remove 'mca': Is a directory
mits@mits-H610M-H-V2-DDR4:~$ rm -r mca
mits@mits-H610M-H-V2-DDR4:~$ ls
document.docx grapes india kerala linuxtext mint s2mca snap yellow
```

tar: The Linux ‘tar’ stands for tape archive, is used to create Archive and extract the Archive files. Linux tar command to create compressed or uncompressed Archive files.

```
mits@mits-H610M-H-V2-DDR4:~$ tar -cvf archive.tar myfolder
myfolder/
myfolder/sample.txt
```

6. wc, cut, paste

wc : wc stands for word count. Used for counting purpose. It is used to find out number of lines, word count, byte and characters count in the files specified in the file arguments. #wc state.txt 6 8 54 state.tx . #wc state.txt capital.txt wc -l state.txt wc

-w state.txt capital.txt wc -c state.txt .wc -m state.txt

```
mits@mits-H610M-H-V2-DDR4:~$ cat state
```

Kerala

Tamil nadu

Goa

```
mits@mits-H610M-H-V2-DDR4:~$ wc state
```

3 4 22 state

```
mits@mits-H610M-H-V2-DDR4:~$ wc -l state
```

3 state


```
mits@mits-H610M-H-V2-DDR4:~$ wc -c state
22 state
mits@mits-H610M-H-V2-DDR4:~$ wc -w state
4
```

cut : The cut command is used for cutting out the sections from each line of files and writing the result to standard output. It can be used to cut parts of a line by byte position, character and file.

```
mits@mits-H610M-H-V2-DDR4:~$ cat > state
```

```
andhra pradesh
arunachal pradesh
assam
```

```
bihar
```

```
Chhattisgarh
```

```
india
```

```
^C
```

```
mits@mits-H610M-H-V2-DDR4:~$ cut -b 1,2,3,4 state
```

```
andh
```

```
arun
```

```
assa
```

```
biha
```

```
Chha
```

```
indi
```

```
mits@mits-H610M-H-V2-DDR4:~$ cut -b 1-3,6-7 state
```

```
anda
```

```
aruch
```

```
ass
```

```
bih
```

```
Chhti
```

```
ind
```

```
mits@mits-H610M-H-V2-DDR4:~$ cut -b 3- state
```

```
dhra pradesh
```

```
unachal pradesh
```

```
sam
```

```
har
```

```
hattisgarh
```

```
dia
```

paste : It is used to join files horizontally (parallel merging) by outputting lines consisting of lines from each file specified, separated by tab as delimiter, to the standard

output. paste [OPTION]... [FILES]...\$ paste state.txt capital.txt.

mits@mits-H610M-H-V2-DDR4:~\$ cat number

1

2

3

4

5

mits@mits-H610M-H-V2-DDR4:~\$ cat state

arunachal pradesh

assam

andhra pradesh

bihar

chattisgrah

mits@mits-H610M-H-V2-DDR4:~\$ cat capital

itanagar

dispur

hyderabad

patna

raipur

mits@mits-H610M-H-V2-DDR4:~\$ paste number state capital

1 arunachal pradesh itanagar

2 assam dispur

3 andhra pradesh hyderabad

4 bihar patna

5 chattisgrah raipur

mits@mits-H610M-H-V2-DDR4:~\$ paste -d "|" number state capital

1|arunachal pradesh|itanagar

2|assam|dispur

3|andhra pradesh|hyderabad

4|bihar|patna

5|chattisgrah|Raipur

mits@mits-H610M-H-V2-DDR4:~\$ paste -d "," number state capital

1,arunachal pradesh,itanagar

2,assam,dispur

3,andhra pradesh,hyderabad

4,bihar,patna

5,chattisgrah,raipur

mits@mits-H610M-H-V2-DDR4:~\$ paste -d "|," number state capital

1|arunachal pradesh,itanagar

2|assam,dispur

```
3|andhra pradesh,hyderabad
4|bihar,patna
5|chattisgrah,raipur
mits@mits-H610M-H-V2-DDR4:~$ paste -s number state capital
1 2 3 4 5
arunachal pradesh assam andhra pradesh bihar chattisgrah
itanagar dispur hyderabad patna raipur
mits@mits-H610M-H-V2-DDR4:~$ paste -s -d ":" number state capital
1:2:3:4:5
arunachal pradesh:assam:andhra pradesh:bihar:chattisgrah
itanagar:dispur:hyderabad:patna:raipu
```

7. head, tail, grep, expr

head: The head command is used to view the first lines of any text file. By default, it will show the first ten lines, but you can change this number to your liking. If you only want to show the first five lines, type head -n 5 filename.txt.

```
mits@mits-H610M-H-V2-DDR4:~$ head india
india is my country
i love my country
all indians are my brothers and sisters
india, officially the Republic of India,[j][20] is a country in South Asia.
It is the seventh-largest country by area
since its independence in 1947, the world's most populous democracy
Bounded by the Indian Ocean on the south
he Arabian Sea on the southwest
Bay of Bengal on the southeast
shares land borders with Pakistan to the west
```

```
mits@mits-H610M-H-V2-DDR4:~$ head -5 india
india is my country
i love my country
all indians are my brothers and sisters
india, officially the Republic of India,[j][20] is a country in South Asia.
It is the seventh-largest country by area
```

tail: This one has a similar function to the head command, but instead of showing the first lines, the tail command will display the last ten lines of a text file. tail -n filename.txt.

```
mits@mits-H610M-H-V2-DDR4:~$ tail india
```

i love my country
 all indians are my brothers and sisters
 india, officially the Republic of India,[j][20] is a country in South Asia.
 It is the seventh-largest country by area
 since its independence in 1947, the world's most populous democracy
 Bounded by the Indian Ocean on the south
 he Arabian Sea on the southwest
 Bay of Bengal on the southeast
 shares land borders with Pakistan to the west
 China, Nepal, and Bhutan to the north
 mits@mits-H610M-H-V2-DDR4:~\$ tail -5 india
 Bounded by the Indian Ocean on the south
 he Arabian Sea on the southwest
 Bay of Bengal on the southeast
 shares land borders with Pakistan to the west
 China, Nepal, and Bhutan to the north

grep : Another basic Linux command that is undoubtedly helpful for everyday use is grep. It lets you search through all the text in a given file. To illustrate, grep blue notepad.txt will search for the word blue in the notepad file. Lines that contain the searched word will be displayed fully. Usually output of a previous command is piped into the grep command. For example, ls -l |grep "kernel".

mits@mits-H610M-H-V2-DDR4:~\$ cat exmple
 unix is great os. unix was developed in Bell labs.
 learn operating system.

Unix linux which one you choose.

uNix is easy to learn.unix is a multiuser os.Learn unix .unix is a powerful.

mits@mits-H610M-H-V2-DDR4:~\$ grep -c "unix" exmple

2

mits@mits-H610M-H-V2-DDR4:~\$ grep -h "unix" exmple

unix is great os. unix was developed in Bell labs.

uNix is easy to learn.unix is a multiuser os.Learn unix .unix is a powerful.

mits@mits-H610M-H-V2-DDR4:~\$ grep -i "unix" exmple

unix is great os. unix was developed in Bell labs.

Unix linux which one you choose.

uNix is easy to learn.unix is a multiuser os.Learn unix .unix is a powerful.

mits@mits-H610M-H-V2-DDR4:~\$ grep -l "unix" exmple

exmple

mits@mits-H610M-H-V2-DDR4:~\$ grep -n "unix" exmple

1:unix is great os. unix was developed in Bell labs.

4:uNix is easy to learn.unix is a multiuser os.Learn unix .unix is a powerful.

expr : The expr command evaluates a given expression and displays its corresponding output. It is used for: . Basic operations like addition, subtraction, multiplication, division, and modulus on integers. Evaluating regular expressions,string operations like substring, length of strings etc. Performing operations on variables inside a shell script.

```
mits@mits-H610M-H-V2-DDR4:~$ a="20"
mits@mits-H610M-H-V2-DDR4:~$ b="4"
mits@mits-H610M-H-V2-DDR4:~$ expr $a + $b
24
mits@mits-H610M-H-V2-DDR4:~$ expr $a - $b
16
mits@mits-H610M-H-V2-DDR4:~$ expr $a \* $b
80
mits@mits-H610M-H-V2-DDR4:~$ expr $a / $b
5
```

8. chmod, chown

chmod : To change directory permissions of file/ Directory in Linux. #chmod who what which file/directory chmod +rwx filename to add permissions. chmod -rwx directory name to remove permissions. chmod +x filename to allow executable permissions. chmod -wx filename to take out write and executable permissions. #chmod u+x test #chmod g- rwx test #chmod o-r test 4

```
mits@mits-H610M-H-V2-DDR4:~$ ls -l
drwxrwxr-x 2 mits mits  4096 Feb 20 11:47  mca
-rw-rw-r-- 1 mits mits   18 Feb  6 14:16  mint
-rw-rw-r-- 1 mits mits  148 Mar  5 11:22  myfile1.txt
-rw-rw-r-- 1 mits mits  148 Mar  5 11:22  myfile2.txt
```

```
mits@mits-H610M-H-V2-DDR4:~$ chmod 777 myfile1.txt
mits@mits-H610M-H-V2-DDR4:~$ ls -l
drwxrwxr-x 2 mits mits  4096 Feb 20 11:47  mca
-rw-rw-r-- 1 mits mits   18 Feb  6 14:16  mint
-rwxrwxrwx 1 mits mits  148 Mar  5 11:22  myfile1.txt
-rw-rw-r-- 1 mits mits  148 Mar  5 11:22  myfile2.txt
```

chown : The chown command allows you to change the user and/or group ownership of a given file, directory. #chownTom Test

```
mits@mits-H610M-H-V2-DDR4:~$ ls -l
```

```
-rw-rw-r-- 1 mits mits 148 Mar 5 11:22 myfile1.txt
-rw-rw-r-- 1 mits mits 148 Mar 5 11:22 myfile2.txt
```

```
mits@mits-H610M-H-V2-DDR4:~$ sudo chown gokul myfile1.txt
mits@mits-H610M-H-V2-DDR4:~$ ls -l
-rwxrwxrwx 1 gokul mits 148 Mar 5 11:22 myfile1.txt
-rw-rw-r-- 1 mits mits 148 Mar 5 11:22 myfile2.txt
```

9. Redirections & Piping: A pipe is a form of redirection to send the output of one command/program/process to another command/program/process for further processing. Pipe is used to combine two or more commands, the output of one command acts as input to another command, and this command's output may act as input to the next command and so on.

```
mits@mits-H610M-H-V2-DDR4:~$ echo "Hello" > output.txt
mits@mits-H610M-H-V2-DDR4:~$ echo "Linux" >> output.txt
mits@mits-H610M-H-V2-DDR4:~$ ls -l | grep ".txt"
```

10. useradd, usermod, userdel, passwd

useradd : This is available only to system admins .Since Linux is a multi- user system, this means more than one person can interact with the same system at the same time. useradd is used to create a new user, while passwd is adding a password to that user's account. To add a new person named John type, useradd John and then to add his password type, passwd 123456789

```
mits@mits-H610M-H-V2-DDR4:~$ sudo useradd gokul
[sudo] password for mits:
mits@mits-H610M-H-V2-DDR4:~$ cat /etc/passwd | grep gokul
gokul:x:1003:1003::/home/gokul:/bin/sh
mits@mits-H610M-H-V2-DDR4:~$ cat /etc/passwd | grep "gokul"
gokul:x:1003:1003::/home/gokul:/bin/sh
```

.

usermod : usermod command is used to change the properties of a user in Linux through the command line command-line utility that allows you to modify a user's login information.

```
mits@mits-H610M-H-V2-DDR4:~$ sudo usermod -l gookul gokul
mits@mits-H610M-H-V2-DDR4:~$ cat /etc/passwd | grep "gookul"
gookul:x:1003:1004::/home/gokul:/bin/sh
```


userdel : Remove a user is very similar to adding a new user. To delete the users account type, userdel UserName

```
mits@mits-H610M-H-V2-DDR4:~$ sudo userdel gokul
```

```
mits@mits-H610M-H-V2-DDR4:~$ cat /etc/passwd | tail -3
```

```
mca:x:1001:1001::/home/mca:/bin/sh
```

```
mysql:x:128:136:MySQL Server,,,:/nonexistent:/bin/false
```

```
exam:x:1002:1002:Exam,,,:/home/exam:/bin/bash
```

passwd : Changes passwords for user accounts. A normal user may only change the password for their own account, while the superuser may change the password for any account

11. df, top, ps

df : Use df command to get a report on the system's disk space usage, shown in percentage and KBs. If you want to see the report in megabytes, type df - m.

```
mits@mits-H610M-H-V2-DDR4:~$ df
```

Filesystem	1K-blocks	Used	Available	Use%	Mounted on
tmpfs	789976	2284	787692	1%	/run
/dev/sda5	216888480	16665692	189132664	9%	/
tmpfs	3949860	0	3949860	0%	/dev/shm
tmpfs	5120	4	5116	1%	/run/lock
efivarfs	256	125	127	50%	/sys/firmware/efi/efivars
/dev/sda1	98304	31816	66488	33%	/boot/efi

top: top command is used to show the Linux processes. It provides a dynamic real-time view of the running system

Syntax:

```
top [options]
```

```
mits@mits-H610M-H-V2-DDR4:~$ top
```

```
top - 14:35:28 up 1:28, 1 user, load average: 0.52, 0.44, 0.39
```

```
Tasks: 337 total, 1 running, 336 sleeping, 0 stopped, 0 zombie
```

```
%Cpu(s): 1.0 us, 0.7 sy, 0.0 ni, 98.2 id, 0.0 wa, 0.0 hi, 0.1 si, 0.0 st
```

```
MiB Mem : 7714.6 total, 447.0 free, 3179.0 used, 4088.6 buff/cache
```

```
MiB Swap: 2048.0 total, 2048.0 free, 0.0 used. 3508.2 avail Mem
```

ps : The ps command, short for Process Status, is a command line utility that is used to display or view information related to the processes running in a Linux system. PID – This is the unique process ID TTY – This is the type of terminal that the user is logged in to . TIME – This is the time in minutes and seconds that the process has been running

.CMD – The command that launched the process

Syntax:

ps [options]

```
mits@mits-H610M-H-V2-DDR4:~/gokul$ ps
```

```
  PID TTY          TIME CMD
```

```
  4182 pts/0    00:00:00 bash
```

```
  9697 pts/0    00:00:00 ps
```

12. ssh, scp, ssh-keygen, ssh-copy-id

ssh : ssh stands for “Secure Shell”. It is a protocol used to securely connect to a remote server/system. ssh is secure in the sense that it transfers the data in encrypted form between the host and the client. It transfers inputs from the client to the host and relays back the output. ssh runs at TCP/IP port 22

```
mits@mits-H610M-H-V2-DDR4:~/gokul$ ssh
```

```
usage: ssh [-46AaCfGgKkMNNqsTtVvXxYy] [-B bind_interface]
          [-b bind_address] [-c cipher_spec] [-D [bind_address:]port]
          [-E log_file] [-e escape_char] [-F configfile] [-I pkcs11]
          [-i identity_file] [-J [user@]host[:port]] [-L address]
          [-l login_name] [-m mac_spec] [-O ctl_cmd] [-o option] [-p port]
          [-Q query_option] [-R address] [-S ctl_path] [-W host:port]
          [-w local_tun[:remote_tun]] destination [command [argument ...]]
```

scp : SCP (secure copy) is a command-line utility that allows you to securely copy files and directories between two locations. With scp, you can copy a file or directory: From your local system to a remote system. From a remote system to your local system. Between two remote systems from your local system. Remote file system locations are specified in format [user@]host:/path Syntax: scp [OPTION] [user@]SRC_HOST:]file1 [user@]DEST_HOST:]file2 \$scp

```
/etc/yum.config /etc/hosts
```

```
ServerX:/home/student $scp ServerX:/etc/hostname/home/student
```

```
mits@mits-H610M-H-V2-DDR4:~/gokul$ scp
```

```
usage: scp [-346ABCOpqRrsTv] [-c cipher] [-D sftp_server_path] [-F ssh_config]
          [-i identity_file] [-J destination] [-l limit]
          [-o ssh_option] [-P port] [-S program] source ... target
```

ssh-keygen : ssh-keygen command to generate a public/private authentication key pair. Authentication keys allow a user to connect to a remote system without supplying a password. Keys must be generated for each user separately. If you generate key pairs as the root user, only the root can use the keys. \$ssh-keygen -t rsa

3. Execute the following scenario using basic Linux commands

- a) Login to your home directory
- b) List contents of your current working directory
- c) List all contents of your current working directory, including hidden files
- d) Make a directory called April2024 inside your current working directory. Change to the directory April2024
- e) Create an empty file name file1
- f) Make a copy of file1 to file2
- g) Copy file1 from the current working directory and save it as the name file2 in one Directory up from the current directory
- h) Clear the terminal window

```
mits@mits-H610M-H-V2-DDR4:~$ pwd
/home/mits
mits@mits-H610M-H-V2-DDR4:~$ ls
document.docx document.pdf india snap
mits@mits-H610M-H-V2-DDR4:~$ ls -a
. .bash_logout .config .fontconfig .lessht .mca.swp .profile .sudo_as_admin_
successful
.. .bashrc document.docx .gnupg .local .mca.txt.swp snap .thunderbird
.bash_history .cache document.pdf india .~lock.document.docx# .mozilla .ssh
mits@mits-H610M-H-V2-DDR4:~$ mkdir April2024
mits@mits-H610M-H-V2-DDR4:~$ cd April2024
mits@mits-H610M-H-V2-DDR4:~/April2024$ touch file1
mits@mits-H610M-H-V2-DDR4:~/April2024$ ls
file1
mits@mits-H610M-H-V2-DDR4:~/April2024$ cp file1 file2
mits@mits-H610M-H-V2-DDR4:~/April2024$ ls
file1 file2
mits@mits-H610M-H-V2-DDR4:~/April2024$ cp file1 ../file2
mits@mits-H610M-H-V2-DDR4:~/April2024$ clear
```

4. Execute the following scenario using basic Linux commands

- Login to your home directory
- Write the contents of syslog (located in the /var/log/ directory) onto the screen a page at a time.
- Read documentation on a command: less

```
mits@mits-H610M-H-V2-DDR4:~$ pwd
/home/mits
mits@mits-H610M-H-V2-DDR4:~$ more /var/log/syslog
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1]: rsyslog.service: Sent signal SIGHUP to main process
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1]: logrotate.service: Deactivated successfully.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1]: Finished Rotate log files.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: 128 rollba
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: Creating s
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: Setting fi
ting the file full; Please wait ...
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: File './it
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: 10.6.18 st
ion id 92
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: Loading bu
pool
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] Plugin 'FEEDBACK'
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Warning] You need to use
binlog-expire-logs-seconds work.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] Server socket crea
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Queued start job for default target Main User 1
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 mariadb[951]: 2025-02-27 10:47:05 0 [Note] InnoDB: Buffer po
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1]: e2scrub_reap.service: Deactivated successfully.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1]: Finished Remove Stale Online ext4 Metadata Check
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Created slice User Application Slice.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Created slice User Background Tasks Slice.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Created slice User Core Session Slice.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Started Pending report trigger for Ubuntu Repos
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Reached target Paths.
Feb 27 10:47:05 mits-H610M-H-V2-DDR4 systemd[1085]: Reached target Timers.
mits@mits-H610M-H-V2-DDR4:~$ less capital

itanagar
dispur
hyderabad
patna
raipur
capital (END)
```

5. Execute the following scenario using basic Linux Commands

- a) Create an untitled document myfile.txt using anyone editor
- b) Place the following text in myfile.txt and save it
Neo: What are you trying to tell me?
That I can dodge bullets?
Morpheus: No, Neo. I'm trying to tell
you that when you're ready, you won't have to.
- c) Count the number of characters, words, and lines in the file
- d) Find the occurrence of the word "tell" in the file e.
- e) Make two copies of myfile.txt with names myfile1.txt and myfile2.txt
- f) List all the filenames with the word file in the present working directory

```
mits@mits-H610M-H-V2-DDR4:~$ touch myfile.txt
mits@mits-H610M-H-V2-DDR4:~$ gedit myfile.txt
mits@mits-H610M-H-V2-DDR4:~$ cat myfile.txt
Neo: What are you trying to tell me?
That I can dodge bullets?
Morpheus: No, Neo. I'm trying to tell
you that when you're ready, you won't have to.
mits@mits-H610M-H-V2-DDR4:~$ wc myfile.txt
4 29 148 myfile.txt
mits@mits-H610M-H-V2-DDR4:~$ wc -c myfile.txt
148 myfile.txt
mits@mits-H610M-H-V2-DDR4:~$ wc -w myfile.txt
29 myfile.txt
mits@mits-H610M-H-V2-DDR4:~$ wc -l myfile.txt
4 myfile.txt
mits@mits-H610M-H-V2-DDR4:~$ grep -c "tell" myfile.txt
2
mits@mits-H610M-H-V2-DDR4:~$ grep "tell" myfile.txt
Neo: What are you trying to tell me?
Morpheus: No, Neo. I'm trying to tell
mits@mits-H610M-H-V2-DDR4:~$ cp myfile.txt myfile1.txt
mits@mits-H610M-H-V2-DDR4:~$ cp myfile.txt myfile2.txt
mits@mits-H610M-H-V2-DDR4:~$ ls *file*
file2 myfile1.txt myfile2.txt myfile.txt
```