

ImproTron User Guide for Release v2.2

Introduction

Welcome to v2.2 of ImproTron, a Windows Desktop application designed to support theaters in presenting ComedySportz® shows, based on the design of the Janis Software. The motivation for creating this application was to bring the Janis experience to a supported technical platform and introduce ideas that could further assist theaters in elevating their show quality and experience.

Installation

- Download the latest release from the [ImproTron GitHub Repository](#).
- Unzip into an appropriate directory such as **C:\Program Files\ImproTron**. However, any directory will do. The application is *main.exe*. Create a shortcut

Note on Virus Scanners

Modern virus scanners often give a false positive and tag the executable as a file containing a virus. Once you allow it to run, there should be no other warnings about viruses. Some scanners may detect it using network ports for connection to the Companion software. Once allowed, there should be no more such messages.

Locations of Files

ImproTron will look for and store files in default locations within Windows. Some of these locations can be changed, but should ideally be left to their defaults. <USER> refers to the user under whom the application is installed and run.

Configuration and List Files	C:/Users/<USER>/AppData/Local/ImproTron
Images and GIFs	C:/Users/<USER>/Pictures
Sounds	C:/Users/<USER>/Music
Videos	C:/Users/<USER>/Videos

Preferences Tab - Running ImproTron for the First Time

The screenshot shows the 'Preferences' tab in the ImproTron application. The interface is divided into several sections:

- Team Presets:** Includes buttons for 'Left Team Color', 'LeftTeam Graphic', 'Right Team Color', 'Right Team Graphic', 'DJ Graphic', 'Referee Graphic', and 'Set Troupe'. There is also a checkbox for 'Left Team First'.
- Hot Buttons:** A table with 10 rows, each representing a button. Each row has a 'Title' column and an 'Image File' column with a 'Select ...' button.
- Hot Button Configuration:** Includes buttons for 'Load List', 'Save List', and 'Clear List'.
- Features:** Includes a checkbox for 'Duplicate to Aux', an 'OSC Port' dropdown set to '9000', a 'Set Games List' button, a 'Startup Image' button, a 'Promos Directory' button, a 'Screen Locations' button (with a lock icon), and an 'About' button.

	Title	Image File	
01	ComedySportz	Shared_Backups/Janis Images/MONITOR_Comedy Sportz RIC_logo_black.jpg	Select ...
02	CSz Theater	C:/Shared_Backups/Janis Images/MONITOR_CSz RT_logo_black.jpg	Select ...
03	Groaner	C:/Shared_Backups/Janis Images/Groaner Fowl.png	Select ...
04	Out of Bounds	C:/Shared_Backups/Janis Images/Out of Bounds.png	Select ...
05	Meter	C:/Shared_Backups/Janis Images/meter.gif	Select ...
06	Run Out	C:/Shared_Backups/Janis Images/BATMAN RUNNING IN DIFF.gif	Select ...
07	Run In	C:/Shared_Backups/Janis Images/BATMAN RUNNING IN.gif	Select ...
08	Half Time	C:/Shared_Backups/Janis Images/Half Time Snack Time.png	Select ...
09	Drum Roll	C:/Shared_Backups/Janis Images/Koala Drum Roll.gif	Select ...
10	Winner	C:/Shared_Backups/Janis Images/winner.gif	Select ...

ImproTron will first open a Text Window in which error messages will appear. Do not close this window. When reporting errors, please either screenshot this window or copy the text from it. A log file is also created in the configuration directory.

ImproTron will always start with a delay due to its indexing of pictures and sound files. After that process, the control panel and two monitor windows will appear, showing the words “Main” and “Auxiliary” respectively. Minimize but don’t close the Auxiliary if only one monitor is available.

- Go to the Preferences tab.
- Select the left and right team colors. The names can be set on the main control panel. Both colors and names will be stored.
- If using the Roster feature, select color-appropriate backgrounds for the major roles. This feature uses animated backgrounds. They can be GIF or WEBP formats. WEBP is recommended because of its smaller file size for higher resolution movies.
- Set the CSV file with troupe names and nicknames. A sample is shipped with the application to demonstrate the file format. Line breaks can be forced into a long nickname using the “/” character.
- Check the Left Team First if that team enters first. This is used by the Roster Feature to determine the Call On sort order.
- Set up the ten hot buttons by selecting image files and giving the names of the buttons. Store the buttons in the file “default.hbt”. Load the same file, as ImproTron remembers the last file loaded.
- Set the default start-up image to be shown on both monitors.

- Optional: Set the default promos drive where images and movies should be picked up to play any time the Promos button on the Slide Show feature tab is pressed.
- Unlock the screens by pressing the Screen Locations button, which will show an unlocked icon.
- Move the screens to the monitor they will need to appear on.
- Lock the screens, and the monitor windows will snap to the size of their containing screen. The location will be stored and used when the application is next run.
- On the text display feature tab, click on the colors button. Drag and drop colors to the custom color boxes. The first 8 are displayed on Text Feature. These same colors are available wherever colors can be set.
- On the Roster tab, set the text scaling slider so that for most nicknames the text fits well with the backgrounds selected above.
- On the Games tab, set the default background, the scaling for the game text, and the text color. Game names will be scaled to fit within the size established by the scaling.
- On the Slide Show Feature tab, set the number of seconds to default to when showing slide shows.
- Exit ImproTron and restart to make sure the configuration file is saved.

Other Preferences Options


Set Games List allows you to populate the games available in a predefined CSV file. One is shipped with ImproTron. Use any tool like Google Sheets or Excel to add. If you create an extensive list, please send it to support to share with the community.

The OSC Port applies to a remote control feature described under Companion integration.

The About button shows the current version but also all preferences and presets, which can be useful in support situations.

Main Control Panel


Scoring Control Section

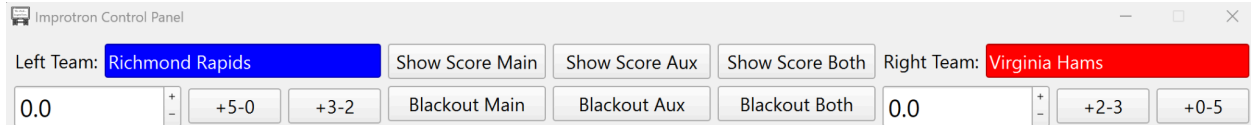

The Main Control Panel houses the controls for managing the team image display, music playback, and the timer. Scores can be shown on the Main, Auxiliary, or both monitors. Team names are entered on the Main Control Panel and are stored for future sessions. Scores can be changed by entering numbers, incrementing with the spin box controls, or using the Quick Add buttons (+5-0, etc). The Quick Add buttons will add to the scores and immediately show on both monitors for quick scoring updates. For example, clicking on +5-0 will add 5 to the Left Blue Team and display.

Monitors can be blacked out individually or both at once.


Monitor Preview Section

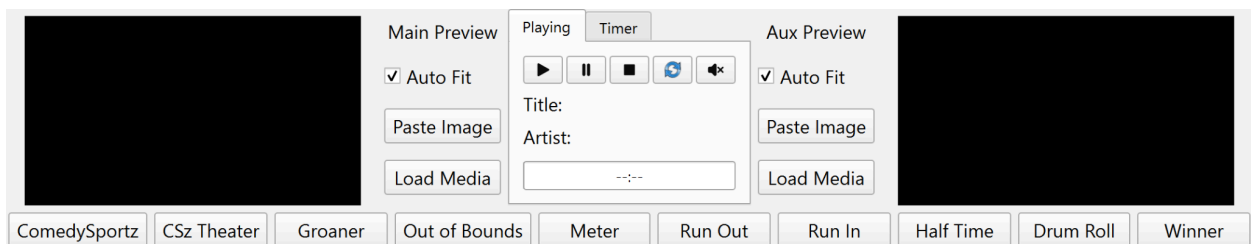

Images or GIFs can be quickly loaded in the Control Panel. The location defaults to the same location as the Image Search Library (See Image Search Tab). Images can be “copied/pasted” from other applications, specifically browsers. Find images in the browser. Right-click and copy the image. Hit the paste button on the target monitor to have it display. Images and GIFs can also be dragged and dropped from a file explorer or the internet. Note that certain web pages render GIFs and images in a manner that can be detected as such. Typically, you have to be on the page with the asset rather than a search results view for drag and drop to work.


The “Fit to Width” check box will expand or contract the image so it fits the width of the Monitor.

Below the monitor previews are the preset Hot Buttons configured in preferences.

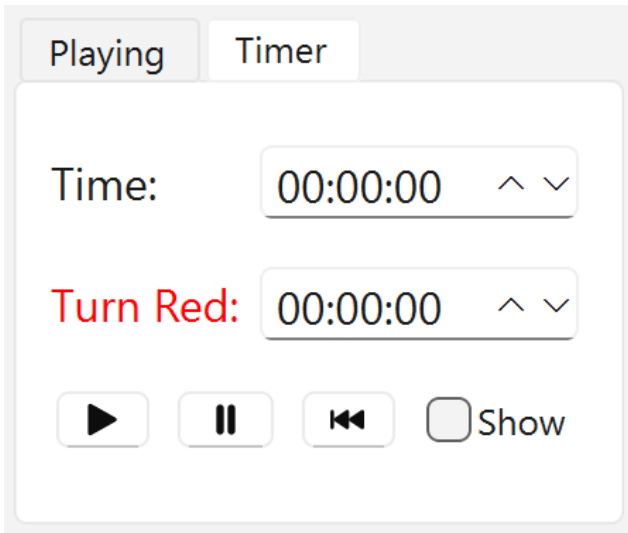

Timer Display

The countdown timer overlays an LCD-style countdown timer on the main monitor. The start time and the time at which the monitor turns red can be set independently. If the Turn Red time is left at zero, then the timer will still turn red as it times out. The timer will continue to run if it is hidden. The Play button will always start the time from the beginning. The Pause button, when toggled, will pause the timer. When clicked again, it will continue counting from where it was paused. The Rewind button will reset to the start time but continue to count down.

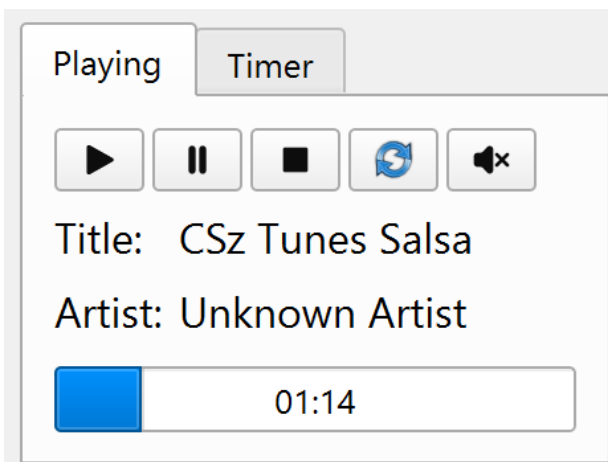


Playing Controls


The playing controls provide universal start, pause, and stop for music. The Playing controls also allow an infinite loop to be set. If looping is disabled mid-playback, it will also immediately stop the currently playing song.

Feature Tabs

Text Display

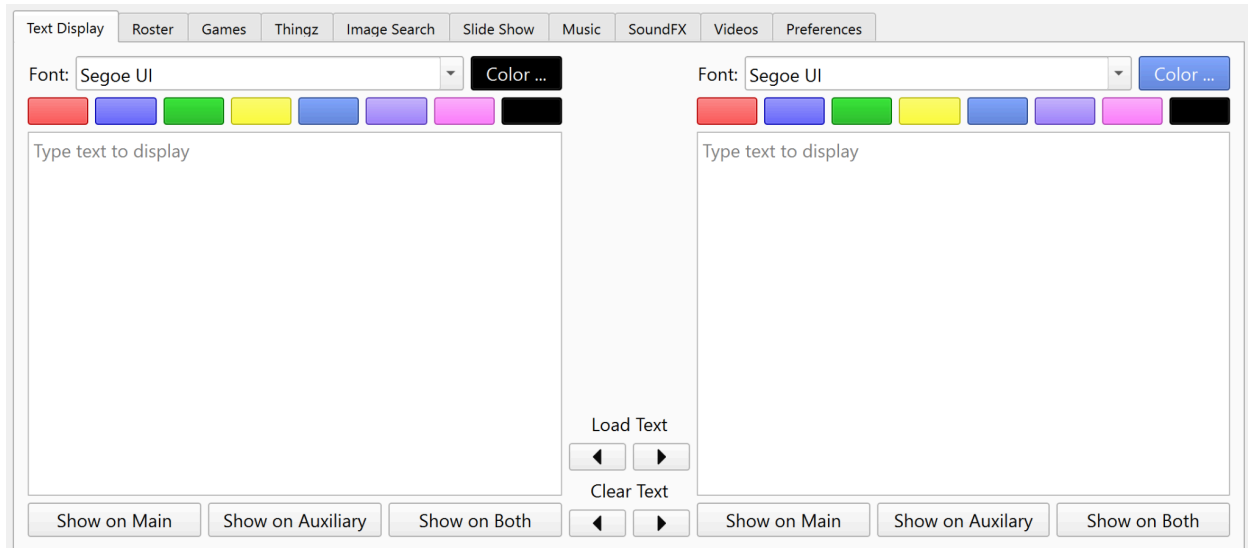

The Text Display offers two independent windows of text that can be directed to either monitor. The text background color and font can be set independently. For accessibility reasons, the text is displayed in black and white on the control panel. It is centered in the font and color selected when pushed to the monitor of choice. Text can also be loaded from storage.

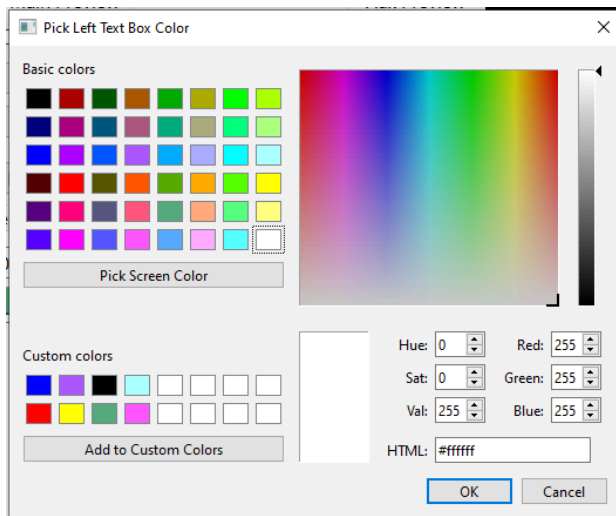

The preset colors are the first eight colors shown on the Color Picker. The presets can be set via the color selection dialog. Use the color picker to set branded colors using numeric values for RGB, HSV, or Hex (HTML).


By adding to the custom colors, the same colors are pulled onto the text display. Note that this is the same color picker used to set Team colors on the preference page.



The font foreground color is automatically calculated as either black or white based on the background color.

Roster Tab

The Roster feature can be used at the beginning and end of a match to show the player names and their nicknames. The default nicknames can be stored as part of a Troupe CSV file configured in Preferences. Each team, the DJ, and the Referee can have their own color-coordinated animation that will play behind their name.

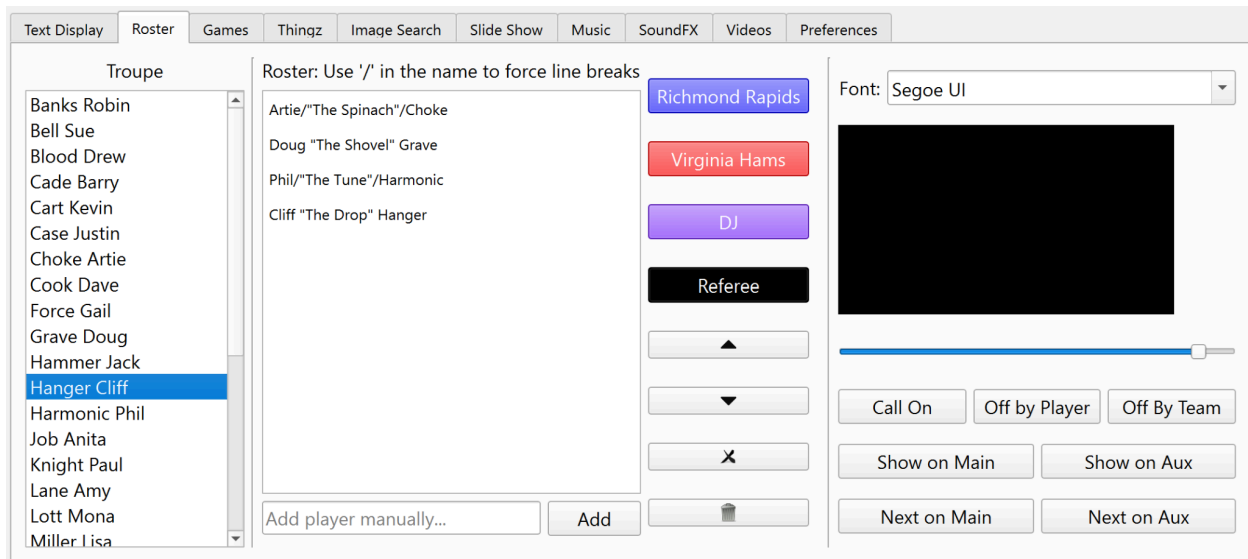

Players can be added via the Troupe list with a single click on their name or via the manual add text box below the roster list. Player names can be edited by double-clicking on their name once added to the roster list. Their troupe name cannot be edited inside the application. You can force line breaks by inserting the '/' symbol into their roster nickname.

The roster can be reordered with the Up and Down arrows. Use the 'X' button to delete single entries and the garbage bin icon to clear the list.


Select multiple names and assign to a role by clicking on the corresponding role button. The preview can be used to check their nickname size and adjust as needed. The scaling applies to the entire roster.

Call On will use the 'Left Team First' preference to sort the teams, followed by the DJ if present, and finally the Referee. The order within the team will be preserved.

At the end of the match, use one of the Call Off buttons to sort the teams. Improtron will use the score and sort the losing team off first. It will also position the selection to the top of the list so that 'Show on Main' (or Aux) will display the right name. Clicking 'Next on Main' (or Aux) will cycle through the list in the right order.

Games Tab

The Games tab is intended to allow Loyal Fans to see what game is being played. It also supports a Whammy feature to allow a random game selection.

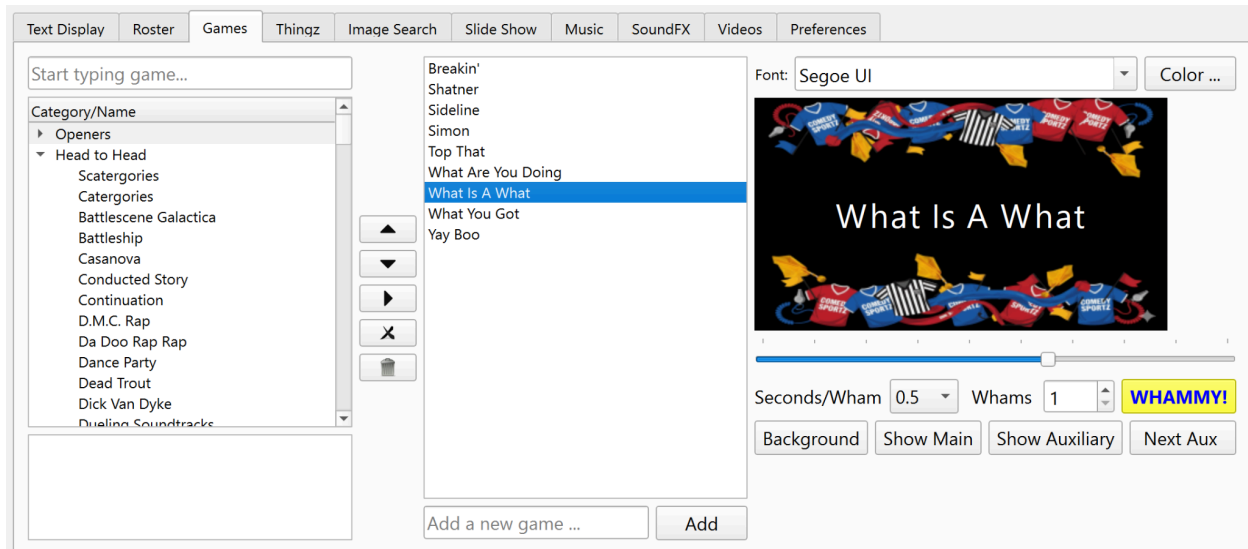

Have a creative person make borders that can act as frames for games. Store them in a directory within the folder selected to house all images. Borders can be static or animated GIFs/WEBPs.

Click on Background and navigate to the desired frame to load. It can also be found via an image search or by navigating the Slide Show tabs. Both have a button to move a slide directly to the game background view on this tab.

Use the Color button to select a contrasting color. Initially, the text will be displayed as 'No Game Selected'. Use the slider right below the game image to scale the text to fit comfortably within the frame.

Enter the games being played by searching for them in the games list. Use the right-pointing arrow button or double-click to add them to the list. You can also use the add text entry and the add button. Reorder as necessary using the Up and Down arrow buttons.

Select the game you want to show and send it typically to the Auxiliary monitor.

Whammy

- Set up the list of games to select from. If you double-click on a game category, the entire category will be added to the games list.
- Set the delay between showing the next game. 1 Second will give enough time to see it.
- Set the number of random selections. 10 can be a good starting point.

Press Whammy! and ImproTron will randomly show games, stopping after the prescribed number of Whams. The choices will be shown on the main monitor.

Thingz Tab

This tab is used to facilitate capture and display during the Thingz round. The flow works best if the activities are entered first, followed by the substitutions.

The screenshot shows a software interface with a tabbed menu at the top: Text Display, Roster, Games, Thingz (selected), Image Search, Slide Show, Music, SoundFX, Videos, and Preferences. The main area is divided into several sections. On the left, there's a 'Font' dropdown set to 'Segoe UI' and an 'Add' button. Below this is a text box 'Name of Thing to Add:' with a placeholder 'Type Thing here then hit the <Enter> key'. A list of items follows: Soccer (blue), Tennis (red), Under Water Basket Weaving (blue), and Curling (red). To the right of this list are buttons: 'Toggle Team', 'Next Thing Main', 'Next Thing Aux', and 'Reverse List'. Further right are up and down arrow buttons, an 'X' button, and a trash can icon. At the bottom left are 'List Main', 'List Auxiliary', and 'List Both' buttons. On the right side, there's a section 'Next Thing is for the' with two colored boxes: 'Richmond Rapids' (blue) and 'Virginia Hams' (red). Below this is a text box labeled 'Tennis' with the placeholder 'Type the elements of the thing that change'. At the bottom right are 'Show Main', 'Show Auxiliary', and 'Show Both' buttons.

Thingz Flow

1. The Referee gets the things. Enter the “Name of Thing to Add” text box and hit the Enter key. This is faster than the Add key. The color will be toggled, starting with blue, then red, in the example.
2. The Referee gets substitutions. Click on each thing, then type the substitutions into the left-hand side text box. In the example, Tennis is selected.
3. Fix any spelling errors or color errors:
 - Double-click on the list item to correct spelling
 - Select the item and edit the substitution to fix.
 - Toggle team to correct colors.
 - Use the X button to delete the selected item. Use the trash can button to clear the list.
 - Use the up and down arrows to move the currently selected up and down the list.
4. For the first guess, use Show Auxiliary while the first thing is selected. After the guess, use Show Main.
5. Subsequently, use Next Thing Aux, followed by Show Main to cycle through the things.

“Twelve Days of” Flow

Enter the things in the format 1 - First Thing, 2 - Second Thing, etc

When the players are about to sing, use the Reverse List button to place the 12th thing at the top of the list.

You can display the list all at once using the List Main Button or use Show Main and cycle through the list, using Next Thing Main.

Image Search Tab

How Image and Sound File Search Works

It is important to understand how image searching has been implemented to set your image library up to be correctly indexed. The same approach has been used for sound files. ImproTron breaks up the file name using these separators: `_+-.\\s+`. It treats each fragment of file name text as a keyword, much like a social media hashtag. It builds an internal database of tags along with the file extensions. It is this database that can be searched. By changing the file name to describe the contents with a few tags, you will make it easier to know what the file contains and, therefore, how to search for it.


For example, imagine a file containing a GIF of a cat shaking its head with the word “nope”. Name the file “cat_nope.gif” or “cat nope.gif” for example. Imagine then you also had a JPEG image of a cat wearing a hat called “cat+hat.jpg”. Searching for “cat” would return both files because “cat” is one of the keywords. Searching for “jpg gif” would return both files because they each have a file extension that matches the list of tags. A search for “cat gif” with the “All Tags” checkbox checked would just return “cat nope.gif” (if that’s how it was named) because all the tags have to apply to the file for it to match.

The application will also match partial tags. For example, horse will return files tagged with horse or horses.


Finding Images

Common file formats such as BMP, JPG, GIF, WEBP, and PNG are supported. The examples below show the impact of forcing all tags to be present. Note that “cat” and “cats” will be treated as separate tags.

Any tag search:

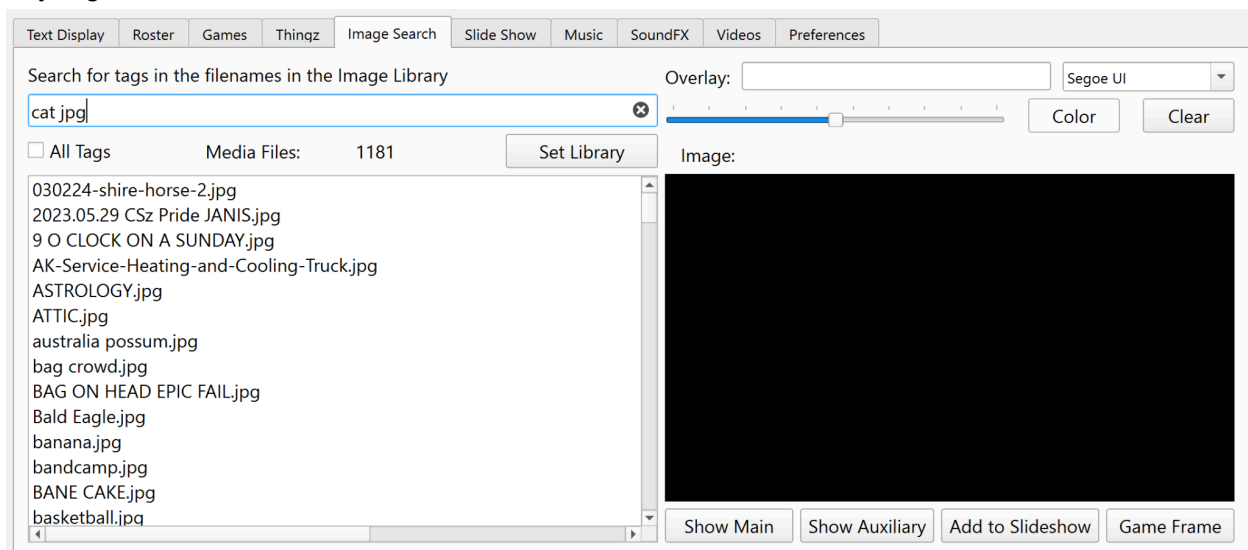

The same search with All Tags required, with partial matches returned as well:

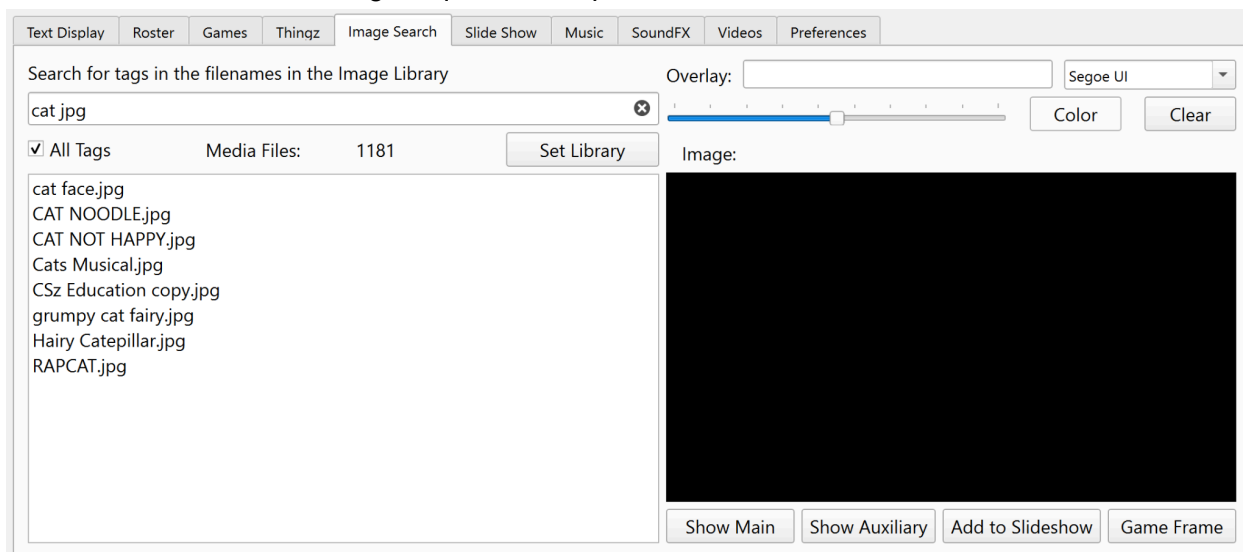


Once a short list of images has been returned, each can be previewed on the tab. The currently previewed file can be pushed to either monitor or added to the slide show list on the Slide Show tab to assist in building slide shows. The location of the file appears above the preview.

The image can be added to the current list of slideshow images. The image can also be sent to the Games Feature to be used as a background.

The location of the image library used on both this tab and the Slide Show tab is set using the “Set Library” button. Once the directory is selected, there will be a short delay while ImproTron builds a new internal database of keywords.


If files are added while ImproTron is running, it will dynamically detect and update so the new files are available in search. The image location is shown above the preview.

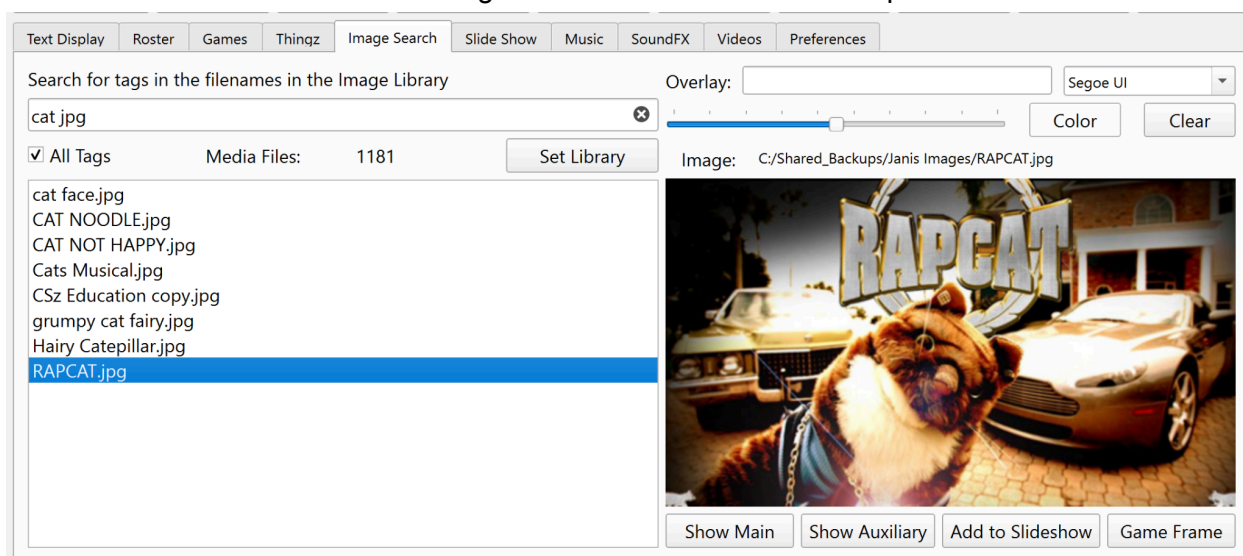

You can add a scaled text overlay with a custom color and font.

Slide Show Tab

The Slide Show tab is where you can build a list of images to be shown before the show or intermission. The tab consists of a few areas. To the left is a hierarchical view of folders within the image library. The location of the image library is set on the Image Search tab. To the right is a list of images that can be viewed and managed. There are buttons to move an image up and down the list, delete images from the list, and clear the list. Lists can be loaded or saved. In the center section of the tab is a preview area. Files that are found via the folder structure will be previewed, as well as any item selected from the list of images. Any image from a list can be pushed to one or both monitors. They can be added to the list or copied to the Game Feature tab to be used as a frame.

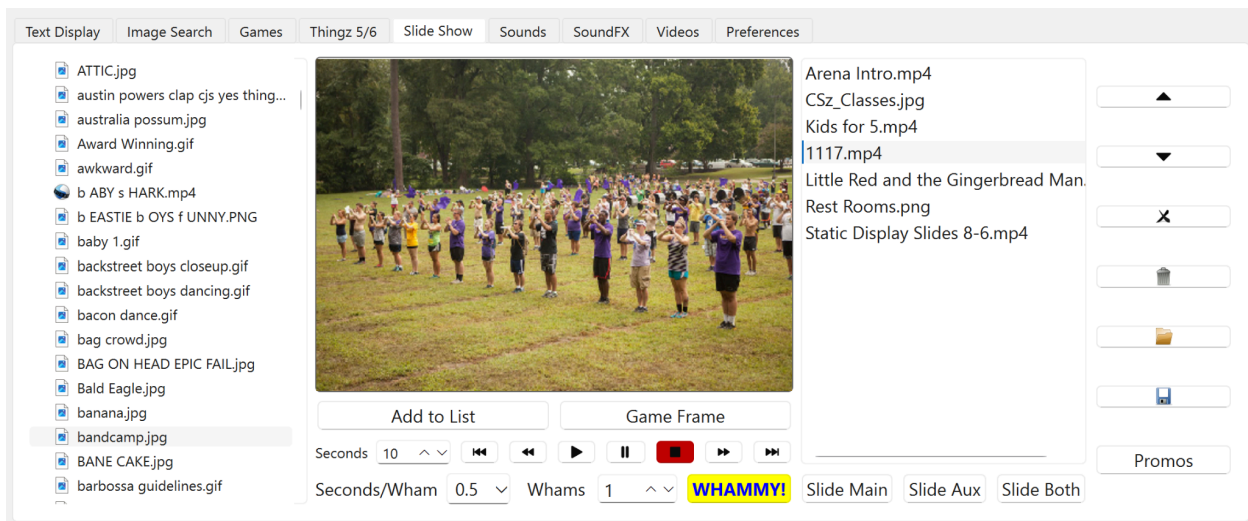

Typical controls for running the slide show are provided below the preview. The main buttons are the Play, Pause, and Stop buttons. The delay between slides can be set via the Seconds spin box. This setting will be remembered between sessions.

This tab also supports a random selection feature. The Whammy button will cause the random selection of slides from the list for as many “Whams” as have been set. The delay between slides can be set to 0.5, 1.0, 1.5, or 2.0 seconds.

The Promos button will automatically load a predefined set of slides from a directory. They can be static slides, animations, or movies. If the movies have sound, it will play at the same time as any music. The intent is that you set up a capability to sync media down from a cloud drive, such as Google Drive or Dropbox. Marketing managers can then define the content, and the media can be synced down. It will be displayed in alphabetical order. Slides will be shown for the length of time given by the Seconds spin box. Movies will play the entire length.

Unless a slide show is explicitly stopped via the red-highlighted stop button, it will write over the top of any other subsequent media actions.


Sounds Tab

The Sounds tab is used for playing audio files. The following are supported:

AAC, AVI, FLAC, M2A, M3A, M4A, M4B, MKV, MOV, MP2, MP2A, MP3, MP4, MP4A, MP4V, MPG4, MPGA, OGV, QT, WAV, WMA, and WMV

A similar strategy as described in the Image Feature section applies to sound files. Name them with file name fragments as to what they contain and what use they are, e.g.

- bird sfx.wav
- high energy bumper.mp3
- singit country ballad.mp3

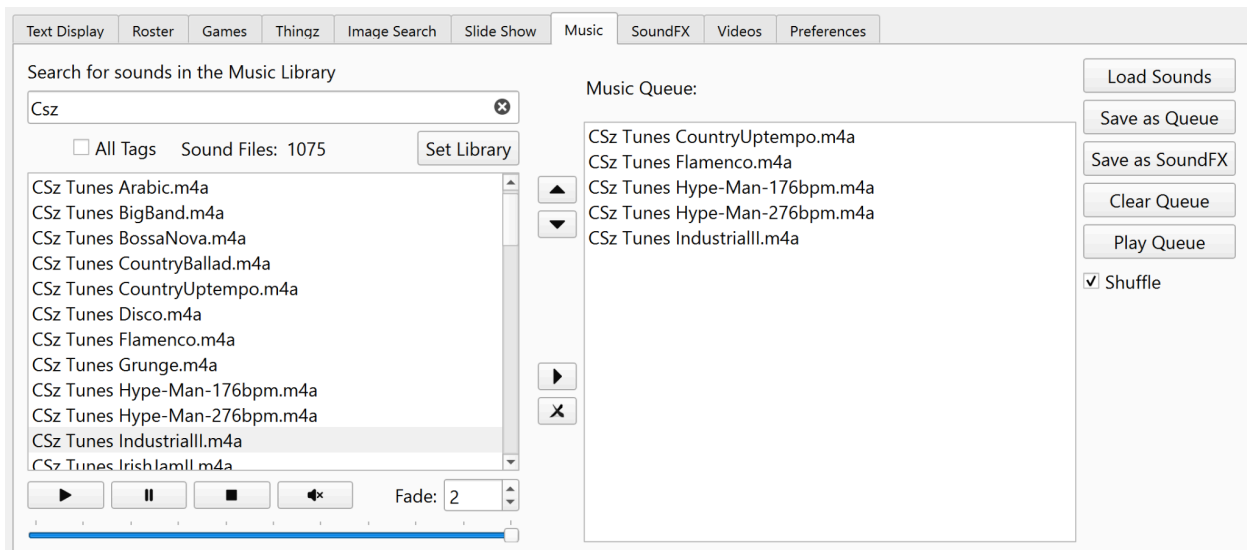

The sound library defaults to where Music files are typically stored, but can be changed via the “Set Library” button. To play a sound from a list, move it back to the search results window. Controls allow for sounds to be played from the search results.

A list of sounds can be created much like lists of images can be created in the Slide Show feature. The main use is to create lists of .wav sounds to be used in the Sound FX Feature. To do this, execute searches and use the left and right arrows to move a result into the Music queue. Use the Save as SoundFX to make available as a sound palette on the Sound FX Feature. Add “wav” to an All Tags search to ensure only WAV files are included.

This list can be used as a holding pen for associated sounds needed for a scene.

If the play button is clicked, it will start the song currently selected in the search results lists. You can start a title in either list by double-clicking an item. Click the Loop in the miniplayer to keep the same song cycling.


“Play Queue” will play all the songs listed in the queue. Check the Shuffle check box to randomize the order before starting to play the list.

Sound FX Tab

The Sound FX tab is intended to be used to enhance a show by using prebuilt lists or palettes of sounds. Currently supported formats: AIF, AIFC, AIFF, and WAV

Any list saved as a Sound FX palette will be made available on the Sound FX Palette drop-down. When a palette is selected, the sounds are assigned to buttons from left to right, top to bottom. If any file type besides supported file types is included in the list, it will be skipped. Playback can be started and then stopped by clicking on the associated button.


Multiple sound effects can be played at once. Volume can be controlled from this tab as well. The 'All Stop' button stops all sound effects currently playing.

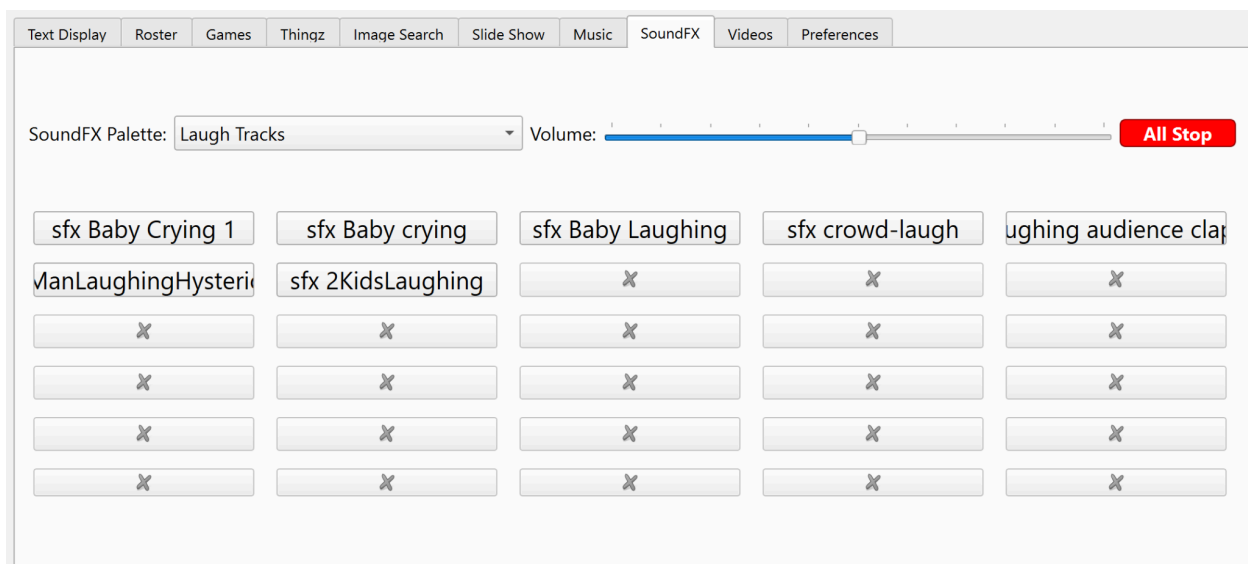

Videos Tab

The Videos tab combines the ability to display MP4s and webcams on monitors. The webcam feature could be used for showing Voice and the booth team during the introductory ref spiel. Currently, the webcam or video can only be shown on one monitor or preview at a time.

Supported Video formats: AVI, MKV, MOV, MP4, MP4V, MPG4, OGV, QT, and WMV.

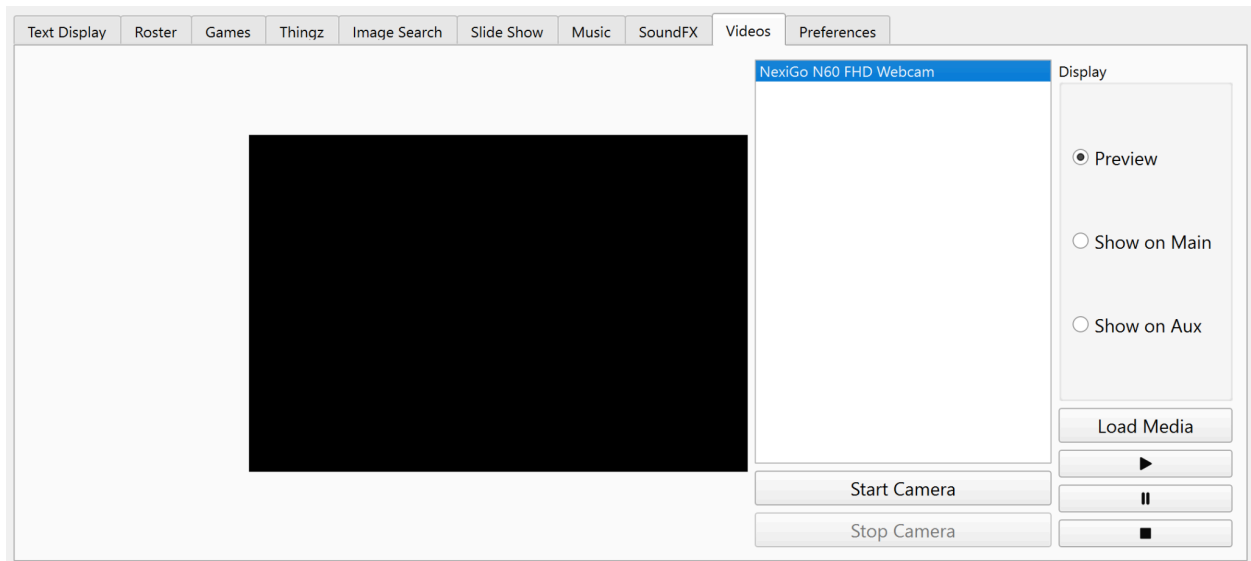

Select where you want to view the media from the three options provided in the Display radio buttons. Load any supported format, then hit play to see the video. If the computer is connected to the sound system, the sound will play.

To use a webcam, select which device you want to use, then “Start Camera”. To halt the webcam, click the “Stop Camera” button.

Companion Integration

[Bitfocus Companion](#) is a free desktop application designed to give operators a unified, customizable control surface for almost any audiovisual device or software. At its core, Companion acts as a command-routing and macro engine: you build “buttons” on virtual pages, and each button can trigger one or more actions across dozens of supported protocols (OSC, HTTP, WebSockets, TCP/UDP, MIDI, DMX, tally, vendor-specific APIs, and more). These buttons can then be executed from a Stream Deck, web browser, tablet, or keyboard—letting you consolidate control of complex AV systems into a single, operator-friendly interface.

Companion’s real strength is its extensibility. It uses a modular architecture where each device or platform is supported by a module (e.g., for QLC+, vMix, OBS, ATEM, Lightkey, HyperDeck, etc.). Modules expose actions, feedback, and variables, allowing you to build sophisticated, state-aware workflows without writing code. Companion can listen to device status and update button colors, text, or logic dynamically—so your control interface doubles as a live status monitor. It can also run sequences, conditional logic, delayed actions, and multi-step macros, making it ideal for show control, broadcast workflows, and theater cueing.

ImproTron can be controlled via the Generic OSC module. It uses the tag method for querying for a set of images or sounds. The diagram below is intended to show how light and sound can be integrated into a simple pushbutton or a more advanced queued control environment. In this setup, ImproTron acts as a simple sound and visual controller.

Supported OSC Commands

In the command table below, tags is a string of space-delimited tags. These operate in the same way tags do in the sound and image search, when “All Tags” is checked. When configuring buttons in Companion, use the search tools in Improtron to isolate a specific file. Otherwise, unless it is the Stinger command, Improtron will use the first item of the set of files returned.


Commands

Feature	Description/Structure	Description
Play Command	<code>/sound/play tags</code>	Plays the first sound of the tag search result set immediately. Send as a string argument.
Play Command	<code>/sound/seek seconds tags</code>	The first sound of the tag search result set plays starting at ‘seconds’ from the start. Seconds are expressed as a floating number. Send as multiple arguments.
Stop Sounds	<code>/sound/stop text</code>	Stop current sound gracefully. Send a dummy string as a string. The value is ignored.

Randomize d Groups	<code>/sound/stinger tags</code>	Random sound of the tag search result set plays immediately. Send as a string argument.
Play Stored Music Queue	<code>/sound/playlist</code>	Loads the queue file from the default location where they are being stored and plays it. Send as string with the playlist, excluding any path, as the parameter, e.g., <i>Playlist.sdq</i>
Stop Command	<code>/media/show monitor tags</code>	Shows the first media (image or GIF) matching tags. Monitor can be <i>main</i> , <i>aux</i> , or <i>both</i> . Send with multiple arguments.
Play FX Command	<code>/soundfx/play tags</code>	Designed for WAV files only. Can play multiple at once. Send as a string.
Stop FX Command	<code>/soundfx/stop text</code>	Stops all active sound effects. Send a dummy text value as a string. The value is ignored.
Button Press	<code>/button/press buttonID</code>	Presses any button on the UI using its text Object ID (provided on request). Send as a string.
Adjust a Spin Box	<code>/spinbox/change spinboxID delta</code>	Changes the number in a spin by the supplied numerical delta. If 0, then resets the spin box to 0. Object ID for scores <i>teamScoreLeft</i> , <i>teamScoreRight</i> . Send as multiple arguments. Delta is a floating-point number like 1.0.
Fade Out	<code>/sound/fade seconds</code>	Sound fades smoothly in seconds. Send as multiple arguments. Seconds is an integer.
Play Movie	<code>/media/movie monitor filename loop</code>	Shows a movie. Monitor can be main or aux but NOT both. Send with multiple arguments. The movie must be the absolute file path enclosed in single quotes. 'Loop' is a flag which, if set to 1 will make the movie replay continuously. Send a 0 for a single loop. Send as multiple arguments. E.g. main 'G:\Shared drives\Display\Assets\Moving Graphic.mp4' 1 Note: to stop a movie, send the Button Press with ID: videoStopPB

The current list of available buttons and spinboxes can be obtained by emailing support. See below.

Architecture Summary

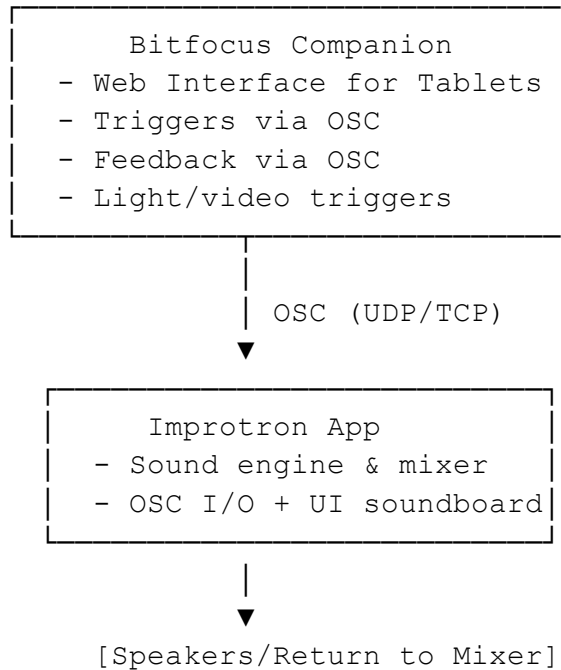

Improtron Control Architecture Overview

Primary Control Modes


Improtron acts as the sound and media player, which any OSC source can control. QLC+ is a free light control software. Lights would be controlled via a [network-attached DMX device](#):

Mode	Master Controller	Improtron Role	Typical Use Case
Standalone / Companion-Controlled	Companion	Performer tool – plays sounds, reacts to button presses, triggers visuals or lights via OSC	Small shows, rehearsals, improv matches
Cue-Integrated / QLC+ Controlled	QLC+	Server module – executes sound cues	Full productions or shows with complex timing and cue lists

Communication Flow

Scenario 1: Companion → Improttron


[Stream Deck / Browser UI / Tablet]



- **Companion** provides a rich, browser-based button interface.
- **Improttron** handles execution: audio playback, visuals, etc.
- Simple, low-latency, one-to-one relationship.

Scenario 2: QLC+ → Improttron (via Companion optional)

[Stream Deck / Browser UI / Tablet]



- **QLC+** becomes the **show control master**: it runs cue lists that trigger both lights and sounds.
- **Companion** still acts as a **front-end** — but now it's just sending cues to QLC+.
- **Improttron** executes only what QLC+ tells it to do (i.e., it becomes a **sound engine**).

OSC Configuration

The Improttron OSC Listener listens on a configurable port. This port must be set in Improttron and in the controlling app. In Companion, this is set up when the Generic: OSC connection is established. Port 9000 is the default for Improttron. If it is changed in preferences, then Improttron must be restarted. The diagram below shows the setup to control Improttron via Generic OSC.

Connections ?

When you want to control devices or software with Companion, you need to add a connection to let Companion know how to communicate with whatever you want to control.

Create Collection

Connection				Disabled	OK	Warning	Error
ImproTron	Generic: OSC	v2.6.0	✓	🔴	⋮		
obs	OBS: Studio	v3.15.3	✓	🔴	⋮		

The settings for Generic OSC. ImproTron and Companion must be installed on the same PC.

Edit Connection: Generic: OSC

Label	ImproTron ✓
Enabled	🔴
Module Version	v2.6.0 ✎
Update Policy ?	Stable ▼

Target Hostname or IP	127.0.0.1 ✓	Target Port	9000 ✓
Protocol	UDP (Default) ▼	Listen for Feedback	🔴

An example button setup which will request ImproTron to look for any matches matching all tags, then play a random selection.

Buttons ?

The squares below represent each button on your Streamdeck. Click on them to set up how you want them to look, and what they should do when you press or click on them.

2 (CSz 1st Half)

Start Promos	Stop Promos	Opener	Groan	Out of Bounds	Half Time	Blank Both	UP
Blue +1	Blue -1	Blue+5 Update	Scoring Update	Next Game	Captains On Field	Fade	CSz 1st Half
Red +1	Red -1	Red+5 Update	Fade Reset	Thingz Runout	Thingz Gets	Thingz Run in	Home 12:40
Show Roster	Reset Main	Next Roster	Loser	Show Thing Aux	Next Thing Aux	Show Thing Both	DOWN

Copy Move Swap Delete Reset page buttons Wipe page

You can use the arrow keys, pageup and pagedown to navigate with the keyboard, and use common key commands such as copy, paste, and cut to rearrange buttons. You can also press the delete or backspace key with any button highlighted to delete it.

Edit Button 2/1/5

Pages Presets Recorder

Notes...

Step 1 Style Feedbacks Local Variables Options

Press actions

ImproTron: Send string

OSC Path

Value

+ Add action

Release actions

+ Add action

+ Add duration group

An example that requests Improtron to show on both monitors the first image file that matches all the tags given: “comedy sportz ric” and to fade out any song in 2 seconds.

Buttons ?

The squares below represent each button on your Streamdeck. Click on them to set up how you want them to look, and what they should do when you press or click on them.

< 2 (CSz 1st Half)

2000 Start Promos

2001 Stop Promos

2002 Opener

2003 Groan

2004 Out of Bounds

2005 Half Time

2006 Blank Both

2007 UP

2010 Blue +1

2011 Blue -1

2012 Blue+5 Update

2013 Scoring Update

2014 Next Game

2015 Captains On Field

2016 Fade

2017 CSz 1st Half

2020 Red +1

2021 Red -1

2022 Red+5 Update

2023 Fade Reset

2024 Thingz Runout

2025 Thingz Gets

2026 Thingz Run in

2027 Home 12:41

2030 Show Roster

2031 Reset Main

2032 Next Roster

2033 Loser

2034 Show Thing Aux

2035 Next Thing Aux

2036 Show Thing Both

2037 DOWN

Copy

Move

Swap

Delete

Reset page buttons

Wipe page

You can use the arrow keys, pageup and pagedown to navigate with the keyboard, and use common key commands such as copy, paste, and cut to rearrange buttons. You can also press the delete or backspace key with any button highlighted to delete it.

Edit Button 2/2/3

Pages Presets Recorder

Test Stop

2/2/3

Fade Reset

Notes...

Step 1 Style Feedbacks Local Variables Options

Press actions

ImproTron: Send message with multiple arguments

OSC Path

/sound/fade

Arguments

2

ImproTron: Send message with multiple arguments

OSC Path

/media/show

Arguments

both comedy sportz ric

+ Add action

In this example, the Promos button kicks off the promos. A specific image of a ComedySportz logo is shown on the aux monitor. A specific playlist is started.

Buttons ?

The squares below represent each button on your Streamdeck. Click on them to set up how you want them to look, and what they should do when you press or click on them.

< 2 (CSz 1st Half)

2000 Start Promos

2001 Stop Promos

2002 Opener

2003 Groan

2004 Out of Bounds

2005 Half Time

2006 Blank Both

2007 UP

2010 Blue +1

2011 Blue -1

2012 Blue+5 Update

2013 Scoring Update

2014 Next Game

2015 Captains On Field

2016 Fade

2017 CSz 1st Half

2020 Red +1

2021 Red -1

2022 Red+5 Update

2023 Fade Reset

2024 Thingz Runout

2025 Thingz Gets

2026 Thingz Run in

2027 Home 12:42

2030 Show Roster

2031 Reset Main

2032 Next Roster

2033 Loser

2034 Show Thing Aux

2035 Next Thing Aux

2036 Show Thing Both

2037 DOWN

Copy

Move

Swap

Delete

Reset page buttons

Wipe page

You can use the arrow keys, pageup and pagedown to navigate with the keyboard, and use common key commands such as copy, paste, and cut to rearrange buttons. You can also press the delete or backspace key with any button highlighted to delete it.

Edit Button 2/0/0

Pages Presets Recorder

Test Stop

2/0/0

Start Promos

Notes...

Step 1 Style Feedbacks Local Variables Options

Press actions

ImproTron: Send string

OSC Path

/button/press

Value

startPromosPB

ImproTron: Send message with multiple arguments

OSC Path

/media/show

Arguments

aux comedy sportz ric

ImproTron: Send string

OSC Path

/sound/playlist

Value

Preshow.sdq

Use of Companion is a more advanced configuration, but quite powerful. Any application that controls via OSC should work. However, this feature is new and untested on the universe of applications, and so contact support to discuss your needs.

Support

You can enter feature requests directly in the associated GitHub repo or email feedback and other issues to guy.winterbotham@gmail.com. Please give the context of the issues, the steps to reproduce, and what you expected would happen. It would also be helpful to click on the About button on the Preferences tab and send along the settings.