

Physical Inventory Counting

Front Royal, VA cold storage · Zebra MC9000-series handhelds

This is the working manual. It assumes you have never opened the app before and takes you from an empty deployment through to a finished count sent to the ERP. Read Part 1 and Part 2 once, when the app is first set up. Parts 3 to 5 are what you do for every count. Part 6 is the cycle-count programme, Part 7 is what to do when something goes wrong.

About the screenshots. Every picture below is the real application, photographed against a count part-way through a morning: the actual Front Royal bin list, three teams, four scanners, two aisles finished and three being counted. The names, pallet IDs and lot codes are made up. If a screen changes, `npm run docs` rebuilds every picture in this manual from scratch and re-prints [SOP.pdf](#) — the same manual typeset for paper.

Printed October 4, 2026


Contents

Part 0 — What the system is	3
Part 1 — First-time setup: getting in	5
Part 2 — First-time setup: the warehouse	
Part 3 — Setting up a count	24
Part 4 — Counting day	30
Part 5 — Finishing a count	48
Part 6 — The cycle-count programme	54
Part 7 — When something goes wrong	56
Part 8 — Capacity: what the system will take	60
Appendix A — File column reference	61
Appendix B — Server settings reference	64

Part 0 — What the system is

One server, four screens. Everything below happens in a browser; nothing is installed on a PC.

SCREEN	ADDRESS	WHO USES IT	SIGN-IN
Scanner	its own link, <code>/?d=...</code>	Counters, on the handhelds	Each scanner has its own link; the bare address opens the supervisor sign-in
Dashboard	<code>/admin</code>	Supervisor running the count	Supervisor login
Settings	<code>/settings</code>	Whoever sets the count up	Supervisor login
Office board	<code>/board</code>	Anyone — put it on the office TV	None. Read-only
Cycle counts	<code>/cycle</code>	Whoever runs the daily programme	Supervisor login
User guide	<code>/guide</code>	Anyone with a login — new starters first	Supervisor login, any access

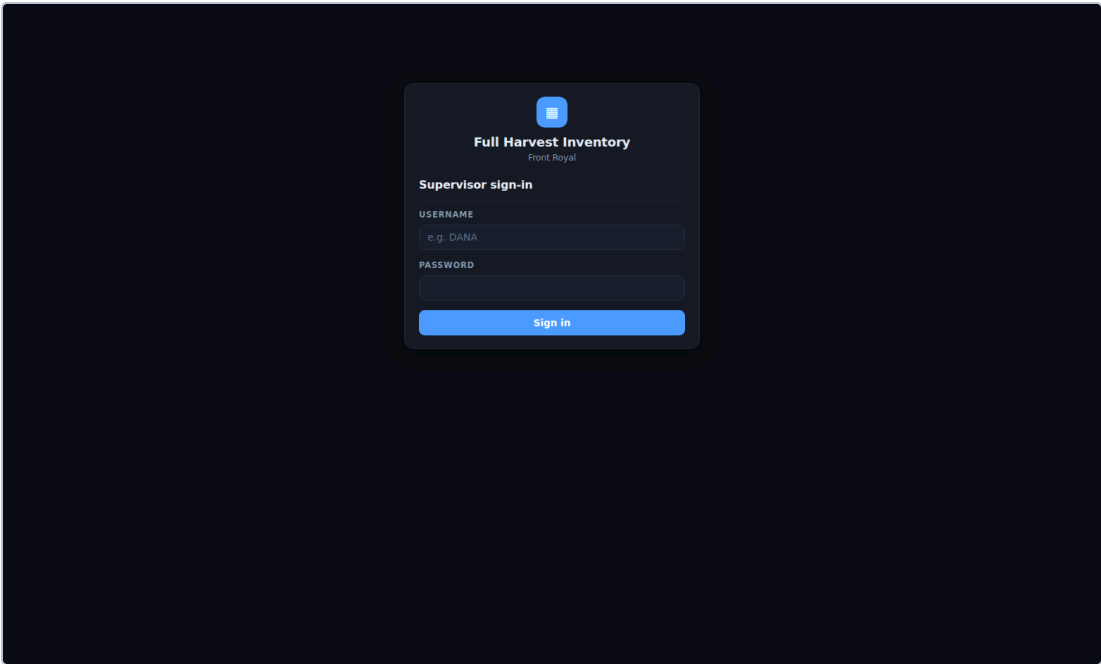

Every supervisor page opens on the same sign-in. Signing in on one carries to all four.

What the system does. It holds a list of every bin in the warehouse and a list of what the ERP thinks is in them. Counters scan pallets into bins on the handhelds. The app compares the two, tells

you where they disagree, sends people back to look again where it matters, and produces an adjustment file for the ERP.

What a "count session" is. One count — a wall-to-wall in October, a spot check of the freezer, the year's cycle-count programme. Everything (bin list, inventory report, team assignments, every scanned line) belongs to a session. You can have several open at once; scanners choose which one they are working on at sign-on.

Two words you need.

- **Aisle** — a rack run, e.g. `F01`. Teams are assigned whole aisles.
- **Block** — aisles that back onto each other share a **block**, and only one team may be active in a block at a time, so two crews never work opposite faces of the same racking. Pairing aisles into blocks is a one-time job (Part 2, step 7).

Bin codes. A code like `F01A001` reads as zone `F`, aisle `01`, level `A`, position `001`. Four positions per bay; odd positions are the front face, even are the back. The app derives the aisle from the code when your file has no aisle column.

Part 1 — First-time setup: getting in

Do this once, with whoever administers the server. Allow 20 minutes.

Step 1 — Deploy the server

On Railway (how this site runs). Deploy the repository; `railway.json` builds the Dockerfile, and the app listens on the port Railway gives it. Attach a **persistent volume** and point `DB_PATH` at it — see step 2 — or the database is wiped on every redeploy.

Your own address (e.g. `fullharvest-inventory.app`). Railway gives the service a `*.up.railway.app` address; a name of your own goes on top of it. In Railway: the service → **Settings** → **Networking** → **Custom Domain**, type the name, and Railway shows the DNS record to add at the registrar. Then at the registrar:

- a **subdomain** such as `count.fullharvest-inventory.app` takes a plain **CNAME** to the target Railway shows — the simplest, and what we suggest for the scanners;
- the **bare name** `fullharvest-inventory.app` cannot carry a CNAME under ordinary DNS, so it needs a registrar or DNS host that offers *CNAME flattening* / an *ALIAS* record (Cloudflare, for one), or point the bare name at the subdomain with a redirect.

Railway issues the HTTPS certificate itself within a few minutes. A `.app` name is HTTPS-only by design (the whole top-level domain is on the browsers' preload list), which the app needs anyway for the scanners' offline mode. Once the new address answers, open **Settings** → **Scanner screen** on it: the scanner links shown there carry the new address, and each handheld is opened from its new link and installed again — an app installed from the old address is a different app to the device. Supervisors just use the new address.

On a PC inside the warehouse (no internet needed).

```
SUPERADMIN_PASSWORD='pick-something' docker compose up -d
```

Then give that PC a static IP or a DHCP reservation, because the handhelds are pointed at its address and that address must never change. Scanners reach it at `http://<that-ip>:3000/`.

Step 2 — Set the server settings

On Railway these are **Variables**; on a PC they go in `docker-compose.yml`. Set these before anybody signs in:

SETTING	SET IT TO	WHY
<code>DB_PATH</code>	A path on the persistent volume, e.g. <code>/data/inventory.db</code>	Otherwise a redeploy loses the count
<code>SITE_TIMEZONE</code>	<code>America/New_York</code>	Dates on reports and cycle-count due dates
<code>SUPERADMIN_USER</code>	e.g. <code>sitelead</code> (defaults to <code>ADMIN</code>)	The one admin login the site starts with, made at start-up
<code>SUPERADMIN_NAME</code>	That person's name, as it should appear in the log	Shown against everything they do
<code>SUPERADMIN_PASSWORD</code>	A strong password, at least 8 characters	Its password; <code>ADMIN_PASSWORD</code> is read as the same thing

The superadmin account is created when the server starts and cannot be deleted from inside the app, so you can never lock yourself out. The app refuses to create it if the password would be the default `changeme` or is shorter than 8 characters — it will say so in the start-up log and carry on without it.

Never put a password in the repository. These are server settings for a reason: anything committed to git is readable by anyone with access to the code, for ever.

Step 3 — Sign in for the first time

Open `/admin`. The page is a plain sign-in until you are in. Sign in as the superadmin — its username and the password you set in Railway (a password typed with no username is taken as the superadmin's). There is no shared password.

Step 4 — Create a login for each supervisor

Settings → Advanced → Supervisor logins.

1. Type the person's **name**, a **username** and choose their **role**: downloads. Nothing on teams, warehouse jobs or cycle counts. aisles, downloads, Testing Suite. The role can be changed on the person's row at any time, and **May use** fine-tunes it (which shows the role as **Custom**).
 - **Admin** — everything, Settings and logins included.
 - **Supervisor** — everything a supervisor can: every page and function except Settings.
 - **Inventory control** — the count only: Dashboard, Testing Suite, approving adjustments,
 - **Count supervisor** — runs the floor: Dashboard, Teams & crew, messages, SOS, queueing
 - **Warehouse jobs** — Front bins, Not in Location, Cycle counts, downloads, Testing Suite.
 - **Cycle counter** — Cycle counts and the Testing Suite only.
2. Press **Add**. The app shows a **starter password** once — something like `winter-4k2p`. Write it down and hand it to them; it is not shown again.
3. The first time they sign in they are made to choose their own password before they can do anything. Nobody but them knows it after that.

If somebody forgets their password, an admin presses **Reset password** on their row and gives them the new starter password. The same forced change happens again.

Roles. Each row has a **Role**: *Admin* (everything, Settings included), *Supervisor* (every page and function but Settings), *Inventory control* (the Dashboard, the Testing Suite, approving adjustments and downloads — nothing to do with teams, warehouse jobs or cycle counts), *Floor lead* (the Dashboard and Teams & crew, messages, SOS and aisles), *Warehouse jobs* (Front bins and Not in Location), *Cycle counts*, and *Custom* for a list of your own. Picking a role sets the list; changing the list makes it Custom.

What each login may use. Every supervisor row has a **May use** column: tick the **pages** they may open (Dashboard, Cycle counts, Front bins, Not in Location, Teams & crew, Testing Suite) and what they **can also** do (approve adjustments, message the floor, answer an SOS, queue aisles and raise second counts, downloads and printouts). A new login may use everything a supervisor can until you untick something; a tick takes effect on their very next click, with no sign-out needed. The sidebar shows them only the pages on their list, and the buttons they may not press are greyed out and say why. **Settings** — Advanced included — is for admins only, whatever the list says; supervisors change their own password from **Change my password** at the foot of the sidebar.

Supervisor logins

everyone who changes something is recorded by name in the log

Give each supervisor their own login. The **role** sets what they may use — **Inventory control** gets the count, adjustments and downloads and nothing on teams, warehouse jobs or cycle counts; **Admins** get everything, Settings included — and **May use** fine-tunes it, which makes the role **Custom**. Deactivating a login keeps its history in the log but stops it being used. The **superadmin** is the login the site started with, set in the server's environment (Railway variables); there is no shared password.

USERNAME	FULL NAME	PASSWORD	ROLE
DANA	Dana Whitfield	leave blank to generate	Supervisor — everything a supervisor can

Leave the password blank and one is generated for you — read it out once, and they choose their own the first time they sign in. Type one instead and they still have to replace it, so nobody but its owner ever knows a working password.

USERNAME	NAME	ROLE	MAY USE	STATUS	LAST SIGNED IN	ADDED
DANA-WHITFIELD	Dana Whitfield	▼	everything	active	10/4/2026, 6:38:49 PM	10/4/2026 Deactivate Reset password
IVY-CHEN	Ivy Chen	▼	Inventory control · 2 of 6 pages · 2 of 5 functions ▼	active	never	10/4/2026 Deactivate Reset password
LUIS-FERREIRA	Luis Ferreira	▼	Count supervisor · 3 of 6 pages · 4 of 5 functions ▼	active starter	never	10/4/2026 Deactivate Reset password
MARCUS-Obi	Marcus Obi	▼	Everything a supervisor can ▼	active	never	10/4/2026 Deactivate Reset password

Your password

CURRENT

NEW

8+ characters

Change password

Settings → Advanced. Each person has their own login, a role and their own password; the starter password is shown once.

Leave the password blank and one is generated for you — read it out once, and they choose their own the first time they sign in. Type one instead and they still have to replace it, so nobody but its owner ever knows a working password.

USERNAME	NAME	ROLE	MAY USE	STATUS	LAST SIGNED IN	ADDED
DANA-WHITFIELD	Dana Whitfield	▼	everything	active	10/4/2026, 6:38:49 PM	10/4/2026 Deactivate Reset password
IVY-CHEN	Ivy Chen	▼	Inventory control · 2 of 6 pages · 2 of 5 functions ▼	active	never	10/4/2026 Deactivate Reset password
LUIS-FERREIRA	Luis Ferreira	▼	Count supervisor · 3 of 6 pages · 4 of 5 functions ▼	active starter	never	10/4/2026 Deactivate Reset password
MARCUS-Obi	Marcus Obi	▼				

Your password

CURRENT

NEW

8+ characters

Microsoft Teams channel

In Teams: --- beside the channel → Workfi...

address works too, while Microsoft still acc...

WEBHOOK ADDRESS

https://...

Save

Send a test card

PAGES THEY MAY OPEN — AND WHICH TABS

☒ Dashboard
 ☐ Progress
 ☒ Map
 ☒ Team plan
 ☒ Alerts
 ☒ Second counts
 ☒ Adjustments
 ☒ Reports

☒ Cycle counts
 ☒ Today
 ☒ Still open
 ☒ Coverage
 ☒ Program & data

☒ Front bins
 ☒ Pallets to move back
 ☒ Move desk
 ☒ Front-placed bins

☒ Not In Location

☒ Teams & crew
 ☒ Crew & teams
 ☒ Equipment rules

☒ Testing Suite

WHAT THEY CAN ALSO DO

☒ Approve adjustments
 ☒ Message the floor
 ☒ Answer an SOS, quiet a stopped-scanning alert
 ☒ Queue aisles, raise second counts, the board note
 ☒ Downloads and printouts

May use, opened on one login: the pages, each page's tabs, and the functions — a tick takes effect on their next click.

Step 5 — Change the superadmin's password

Sign in as the superadmin, press **Change my password** at the foot of the sidebar, and pick one only you know. The environment variable no longer opens the account after that; a restart never puts the old password back.

Step 6 — Upload the bin list

Settings → Lists & racking → Bin list.

This is every location in the warehouse. It is what a scanned bin is checked against, and it is what defines the aisles teams get assigned to. **Upload this before anything else.**

- For this site, press **Load the Front Royal bin list** — the ERP bin export ships with the app: racks F01-F24 and A01-A04 plus WIP, the NIL bin and other areas. Staging lanes and dock doors are counted manually and are deliberately left out.
- Otherwise choose a CSV or Excel file. Column names are matched loosely — see [Appendix A](#). The only column you must have is the bin location.
- **Replace what is there** wipes the existing list first. Leave it unticked to add to it.

The card reports what it read: how many bins, how many aisles, and anything it skipped.

Settings → Lists & racking. Each list has its own card, and each reports exactly what it read.

Step 7 — Pair the aisles into racking blocks

Settings → Lists & racking → Aisles & racking blocks.

Aisles that back onto each other must share a block so two teams are never working the same racking from both sides.

1. Set **Aisles per block** to 2 (most double-deep racking).
2. **Skip first** is 1 if the first aisle has a wall behind it rather than another aisle.
3. Press **Auto-pair aisles**, then read the table and correct anything that is wrong by typing a block name straight onto a row.

If you have uploaded a rack drawing, **Pair from drawing** uses it instead — more reliable than counting aisles off by hand.

Aisles & racking blocks

Aisles in the same **block** share racking, so only one team can be active in a block at a time. Pair them automatically, or type a block name on any row. Teams are queued onto these aisles on the [Dashboard](#).

AISLES PER BLOCK

SKIP FIRST

2

0

Auto-pair aisles

Pair from drawing

aisle	block	bins	counted	progress	status
Dry Dock - Aisle A01	A01+A02	132	0		—
Dry Dock - Aisle A02	A01+A02	258	0		—
Dry Dock - Aisle A03	A03+A04	258	0		—
Dry Dock - Aisle A04	A03+A04	36	0		—
Freezer - Aisle F01	F01+F02	654	652		done
Freezer - Aisle F02	F01+F02	618	240		active team 1 (ABCDEF)

Aisles paired into racking blocks. F01+F02 share racking, so only one team works that block at a time.

Step 8 — Register the scanners

Settings → Scanner screen → Scanner setup.

Each handheld gets its own link. Opening that link once is what signs the scanner in; after that the server accepts counts from it and stamps its name on every line.

1. Type a **scanner name** — use what is written on the device, e.g. `SCANNER-05`. Add notes (asset tag, "freezer unit") if it helps.
2. Press **Add scanner**. Repeat for every handheld.
3. Press **Print setup cards**. You get one card per scanner with its own QR code. Cut them up and tape one inside each cradle.

Scanner setup

scanners must sign in

each scanner gets its own link — open it once on the device and add it to the home screen

SCANNER NAME

NOTES (OPTIONAL)

SCANNER-05

e.g. asset tag, freezer unit

Add scanner

Print setup cards

scanner	link			signed in	last seen	team	notes		
SCANNER-01	http://127.0.0.1:3499/?d=f9hg7tv7	Copy	QR	10/4/2026	10/4/2026, 6:38:47 PM	1	freezer unit A	Reset link	Remove
SCANNER-02	http://127.0.0.1:3499/?d=sbqmfxt	Copy	QR	10/4/2026	10/4/2026, 6:38:47 PM	2	freezer unit B	Reset link	Remove
SCANNER-03	http://127.0.0.1:3499/?d=dxt9bjfb	Copy	QR	10/4/2026	10/4/2026, 6:38:47 PM	3	freezer unit C	Reset link	Remove
SCANNER-04	http://127.0.0.1:3499/?d=8bbs6ez	Copy	QR	10/4/2026	10/4/2026, 6:38:47 PM	—	spare, in the office	Reset link	Remove

On the device: open the link in Chrome (or scan the QR into the address bar), then menu → **Add to Home screen**. Opening the link signs that scanner in — the server accepts counts from signed-in scanners only. Treat a link like a key: **Reset link** issues a new one and kills the old, and removing a scanner stops it entirely. A link used more than once is flagged, which is normal after a scanner is wiped and worth a look otherwise.

Settings → Scanner screen. One row per handheld: its link, when it was last seen, Reset link and Remove.

On each handheld, once:

1. Open Chrome, scan the QR code from its card into the address bar (or type the link).
2. **Install it. Do not leave it running as a browser tab.** Chrome menu → **Install app / Add to Home screen**, or tap **Install on this scanner** on the app's own sign-on screen. Installed, it runs in its own window — no address bar at all — and starts even with no signal.

A browser tab is the one setup that causes trouble: Chrome keeps its address bar above the page, brings it back whenever the page moves, and if the keyboard focus ever leaves the page a scan is typed into that bar instead of into the count. The app warns you when it is running in a tab and offers **Hide the browser bar for this shift** as a stopgap.

Still want a locked-down device? See **Kiosk mode** at the end of this step.

1. Set up **DataWedge** so scans arrive as keystrokes: either as the end of a scan, and neither moves the cursor off the box)*
 - the profile associated with Chrome → **Keystroke output: enabled**
 - **Basic data formatting** → send a suffix: **ENTER** *(or TAB — the app takes
 - **Barcode input** → enable the symbologies your labels use.

Kiosk mode. Three levels, strongest last:

	WHAT IT TAKES	WHAT THE COUNTER SEES
Installed app (do this)	Chrome menu → Install app, once per device	Its own window. No address bar, no tabs, no back button
Full screen for a shift	The button on the sign-on screen, one tap	The bar goes away until the app is closed. The browser says so once, with a banner carrying the address
Locked device	Zebra Enterprise Home Screen (built into the device) or your MDM, set to launch this app and nothing else	The handheld does nothing but count. Survives a reboot

The first two are inside the app. The third is a device setting — it is configured on the handheld or through your MDM, not here, and it is the only one that stops somebody leaving the app altogether.

Treat a scanner link like a key. Reset link issues a new one and kills the old — use it if a device is lost or a link gets out. Removing a scanner stops it entirely. A link used on more than one device is flagged in the table; that is normal after a scanner is wiped and worth asking about otherwise.



Print setup cards: one per scanner, each with its own QR code and the three steps to do on the device.

Step 8a — A barcode test book, to practise on

Settings → Getting started → Barcode test book. A page of real **Code 128** labels to print, cut up and scan — the same symbology the racking uses, so a gun that reads the book reads the rack. Use it to train a crew at a desk, to check a new scanner reads properly, or to dry-run a count before the real one.

The page is a table, one row per line to count: **Bin, Pallet, Qty**. Work down it the way a counter works down an aisle — scan the pallet, key the quantity, scan the bin. The quantity is printed as a number to type; tick **Quantity as a barcode too** and it is scannable as well, for demonstrating a scan-everything workflow.

Two ways to fill it:

- **From this count — Pallets, with their bin and quantity** gives a full practice line per row, straight from the uploaded lists, so what you scan off the paper is what the gun expects. **Bins on their own** prints rack labels with the other two columns empty, which is what you want for practising empty bays. Narrow it to one aisle, and say how many rows.
- **From a spreadsheet — ↓ Excel template** downloads a workbook with four columns:

COLUMN	WHAT GOES IN IT
Bin	The bin barcode for that row — leave it out and the column is blank
Pallet	The pallet barcode

COLUMN	WHAT GOES IN IT
Qty	The quantity to key in (or to scan, if you ticked the box)
Note	A small line under the pallet — the item, or what the row is for

Fill it in, upload it back, and the book opens ready to print. The codes need not exist in any count — that is the point of practising.

Print at 100%. “Fit to page” shrinks the bars and a scanner will refuse them. Plain white paper only: glossy or coloured stock scatters the beam.

Barcode test book

bin, pallet and quantity — real Code 128 to practise on

A printable sheet of practice lines — **bin, pallet, quantity**, one row each — in real Code 128, the same symbology the racking uses. Work down the page the way a counter works down an aisle. For training a crew, demonstrating the app, or dry-running a count before the real one. Take the lines from this count, or fill in the spreadsheet with whatever you want to practise on.

FROM THIS COUNT

ROWS

Pallets, with their bin and quantity ▾

AISLE

F01 — or blan

HOW MANY

40

☐ Quantity as a barcode too

Open the book

FROM A SPREADSHEET

Download the template, type or paste your codes into it, then upload it back. One row per line to practise: **Bin, Pallet, Qty** and an optional **Note**. Leave a cell empty and that column is blank on the page — a bin with no pallet is an empty bay to practise on.

↓ Excel template

Choose File

No file chosen

Turn it into barcodes

The test book card: a practice line per row from the count itself, or from a spreadsheet of whatever you want to practise on.

Step 8b — The SOS list, and the Teams channel

Settings → Scanner screen → SOS from a scanner.

Every gun has an SOS button. What it offers when pressed is this list — write it in the words your floor uses, because the person pressing it is in a hurry. It ships with what usually goes wrong in a cold store, most urgent first: an injury, **equipment broken down, needing a supervisor**, somebody shut in, racking that looks unsafe, a spill, blocked bins, a scanner problem. Each SOS shows on the dashboard (a red bar above every tab, with a chime) and, if the channel is set up, in Teams.

To send alerts to a Teams channel as well (Settings → Advanced → Microsoft Teams channel):

1. In Teams, click **⋮** beside the channel → **Workflows** → *Post to a channel when a webhook request is received*.
2. Follow it through; Teams gives you a web address.
3. Paste that into **Webhook address**, tick **Send alerts to Teams**, and **Save**.

4. **Send a test card** — a card should appear in the channel within a second or two. Do this now, not during an emergency.

An older *Incoming Webhook* connector address also works while Microsoft still accepts them. The address is a key — anybody holding it can post into that channel — so it is stored once and never shown again in full; the page only shows which server it points at.

A Teams outage never costs you an alert. The SOS is on the dashboard either way, and the row says whether the channel took it (`teams` , or `teams failed: ...`).

When a team stops scanning. On the same card: a team that is signed on and still has an aisle, but has not scanned for this many minutes (10 to start with), gets an amber bar on the dashboard — and a card in the Teams channel if **Send it to the Teams channel too** is ticked. **0** turns it off.

SOS from a scanner the shipped list what a counter can raise, and the channel it goes to

Every gun has an **SOS** button. Pressing it offers this list, and whichever one the counter picks lands on the dashboard within seconds — with their team, aisle and last bin — and in a Teams channel if one is set up under **Advanced**. Write the list in the words your floor uses; the counter is in a hurry.

Injury — someone needs help now **Equipment broke down — lift truck, reach truck, jack** **Need a supervisor** **Someone is stuck or shut in**

Racking or a pallet looks unsafe **Spill, leak or damaged stock** **Cannot reach the bins — blocked** **Scanner or app problem**

e.g. Blast freezer door will not close Add

When a team stops scanning

A team that is signed on and still has an aisle, but has not scanned for this long, gets an amber bar on the dashboard — **On break**, **Lunch** or **Seen** quiets it. Signing off on the gun stops a team's clock. **0** turns it off.

ALERT AFTER (MINUTES)

10 ☒ Send it to the Teams channel too (set under Advanced)

Save Restore the shipped list

The SOS list, under Scanner screen.

Microsoft Teams channel where an SOS and a stopped-scanning alert go, besides the dashboard

In Teams: ... beside the channel → **Workflows** → *Post to a channel when a webhook request is received*. That gives you an address — paste it here. (An older *Incoming Webhook* connector address works too, while Microsoft still accepts them.) The address is a key: anyone who has it can post into that channel, so it is stored here and never shown again in full.

WEBHOOK ADDRESS

https://... ☐ Send alerts to Teams ☒ Say when it is dealt with

Save Send a test card No Teams channel set — alerts stay on the dashboard.

The Teams channel it goes to, under Advanced: the address is kept, never shown again in full.

Step 8c — The Testing Suite: try the scanner on test data

Testing Suite in the sidebar. The fastest way to show somebody the gun, or to try a setting before a count, without a handheld and without touching a real count.

On the left is the **real scanner app** — the same one the Zebras run — on a picture of an MC9300. On the right is a sheet of test data: two short aisles of real Front Royal bins (F01 and F02, levels A–B), what is on each shelf, and a made-up inventory report laid over them.

Click any bin, pallet or quantity on the sheet and it is scanned into the gun, exactly as the trigger would send it. The **SCAN** box under the screen sends anything you type — a wrong ID, a typo — to see what the gun does with it. You can also click on the gun's screen and use it directly.

1. **Sign on.** Click team **99** and a clock-in number, then **Sign on & load list** on the gun. Team 99 already has F01, then F02. Your own clock-in number works; **T1001** and **T1002** are made up, so the gun flags them as not on the crew list — which is what it does with a typo.
2. **Start counting**, and work down the sheet. For each pallet: pallet, quantity, bin.
3. **Things to try** ticks itself off from what actually reached the server. The shelves are wrong in places on purpose, each with a **Try this** line saying what to do:

BIN	WHAT IT TEACHES
F01A002, F01B004	Two and three pallets in one bin
F01A003	An empty bin — Bin is EMPTY — scan the bin
F01A004	A pallet short of the report (report 36, shelf 32)
F01A005 / F01A006	A pallet in the next bay, and one the report never heard of
F01B001	A torn pallet label — Label will not scan , then type it
F01B002	Best-before already passed
F01B003	A missing rack label — Bin label will not scan
F01B006	A pallet on the report that has gone — record the bin empty
F02B001	A quantity big enough that the gun asks for it twice

Then **Aisle complete — next aisle**, press **SOS** once, and **Open the dashboard on this count** to see it all from the supervisor's side: progress, the pallet report, the SOS bar, adjustments.

It is walled off from the real thing.

- It counts into a **Practice count** of its own. A gun on the floor is never offered it, and the test gun is never offered anything else.
- The office board never shows it. In every dashboard's count picker it is listed **last** and marked **PRACTICE**, so no page opens on it by mistake.

- **It is yours.** Each login has its own practice count and its own test scanner (**TEST-** and their name, under Scanners), kept from one sign-in to the next. Nobody else sees it, two people practising at once never touch each other's, and a **new user** opens the tab to a fresh one. The test gun keeps its own storage in the browser, separate from a real scanner's and from anyone else's.

First time here? The tab opens with a short guide at the top — what the two halves are, and the six steps from signing on to opening the dashboard — and a **tip bubble** that points at the next thing to click and follows the gun: *click 99, now a clock-in number, tap Sign on on the gun, click this pallet, now the quantity, now the bin*. Both fold away (**Hide, I've got it**) and stay folded for anyone who has counted here before; **Show tips** brings the bubble back.

Before you start at the top of the tab is the checklist: signed in with your own login, test data loaded, the test scanner registered and signed in, team 99 with aisles, the gun running — each with what to do if not. It reads **ready to test** when there is nothing to do.

Your own test pallets. Upload a sheet with **Bin, Pallet** and **Qty** (and, if you have them, **Note, Lot, Best Before**) and the practice run is built from it instead. It is the same sheet as the barcode test book (step 8a): print the book, upload the same file here, and scan the paper. A row with a bin and no pallet is an empty bin. The file is checked row by row and told back plainly (*row 7: "ten" is not a quantity*). **Back to the built-in test data** returns to the shipped aisles.

Try the features that ship turned off. Lot codes, best-before dates, adjustments needing approval (with its thresholds), the pallet check (allow override / no overrides / accept any), automatic second counts, the comments step — each can be switched on for **your practice count only**; nothing else changes. Each one says whether the practice data has what it needs (*✓ 25 of 25 pallets have a lot code*) and, when it does not, what to add to your file. Settings that apply to every scanner (the Teams channel, the stopped-scanning limit, the scanner screen) are not changed from here.


Start over begins a new practice run. The one you were on is kept under **Your earlier runs** — when it started, how many of the twelve things you tried, how much you counted — so you can see your own progress. The last ten are kept. Nothing on a real count is touched.

What to practise. A count is not the only thing a scanner does, so the card under the guide offers the other jobs, each set up on your practice the first time you pick it — and only the jobs your login may do for real (a login without Cycle counts is not offered the cycle count):


PICK	WHAT IS SET UP	WHAT THE GUN DOES
Cycle count	A practice cycle count beside your run, with a five-bin list: a plain bin, two pallets, an empty bin, a short pallet, one whose pallet has gone	Cycle count at the top of the sign-on screen; sign on with a clock-in number alone; Start counting the list ; every pallet in the bin, then Bin done

PICK	WHAT IS SET UP	WHAT THE GUN DOES
Move pallets	Three front pallets to put back in the empty bin behind — one of them into a bin that turns out not to be empty	Move pallets at sign-on; pick the aisle; scan the pallet, put it back, scan the bin; Cannot move it with a reason for the one that will not go
Not in Location	Three lost pallets on the list, for you alone: two are on the shelves, one is nowhere	Count the full count as normal; the gun says found! the moment it scans one, and the office is told where

Each job adds its own lines to **Things to try**, the tips follow it on the gun, and the pane under the card shows the list — bins, pallets, moves, lost pallets — with what is done. The planted lost pallets never reach the real Not in Location page or a scanner on the floor. **Start over** clears the lot.

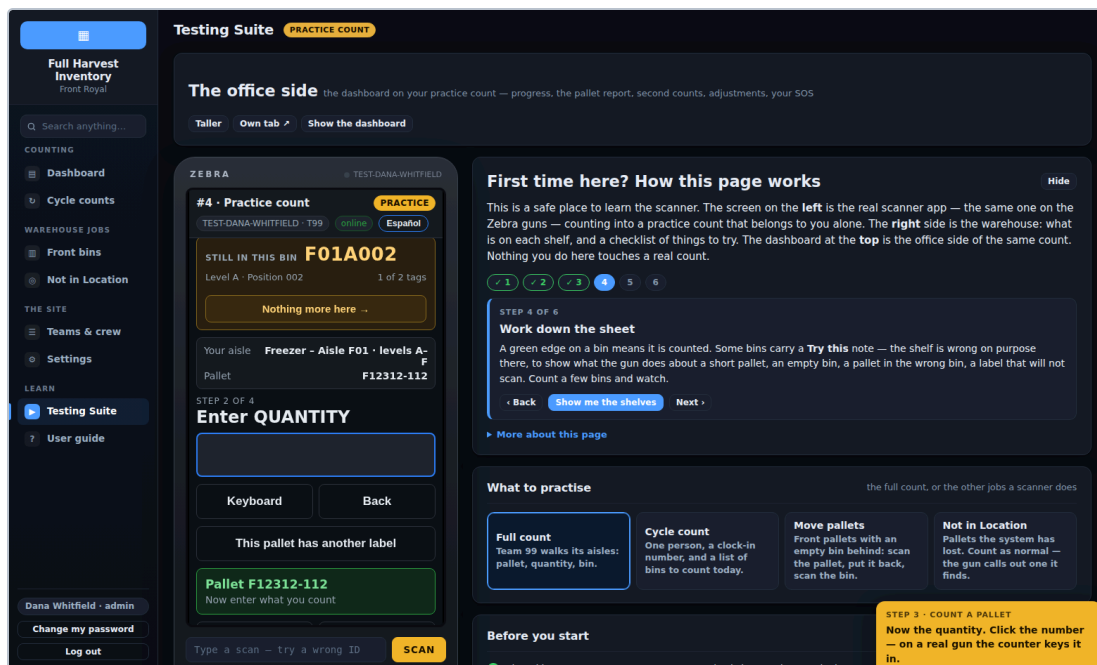

The Testing tab: the real gun on the left, the shelves and what to try on the right.

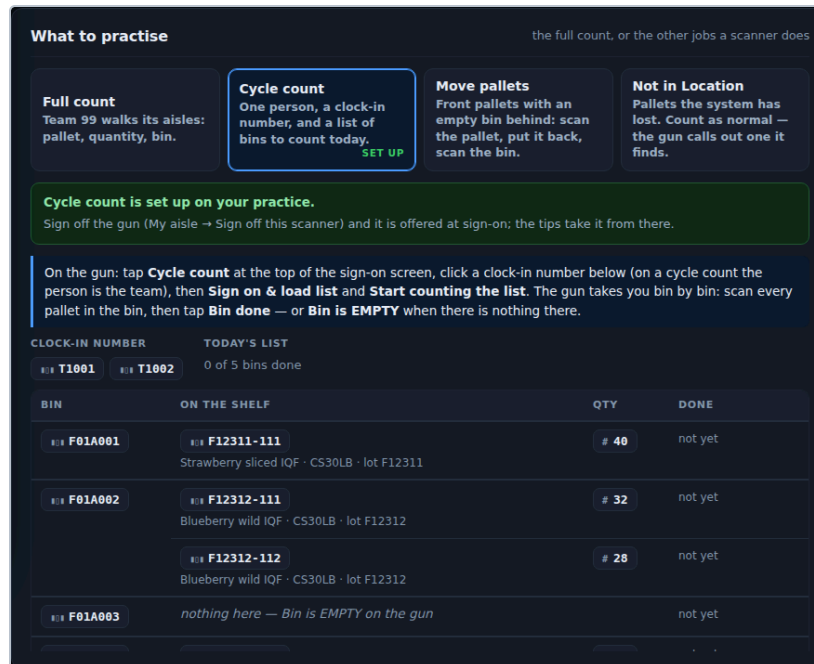

What to practise: the cycle count picked, its five-bin list under the card.

Step 8d — The user guide: this document, inside the app

User guide in the sidebar, under *Learn*. Every login can open it, whatever else it may or may not do. It follows this SOP job by job and is the first place to send a new starter.

- **Journeys.** Your first day, Set the site up, Set up a count, Counting day, Finish a count, Cycle counts, Front bins and pallet moves, Not in Location, and On the scanner (the counter's loop, for training). Each step says what to do, links to the card it is about, and then lists **what tends to go wrong here** — the message you will see, what it means, what to do — and **what people ask at this point**. Tick a step when it is done; the ticks stay in that browser, so each person keeps their own place.
- **Ask the guide.** Type a question in your own words (*"the gun says offline — did we lose the counts?"*, *"how do I approve adjustments"*) or paste a message straight off the gun or the dashboard. It searches every step, every question, and every message the gun and the server can show, and answers with the fix and a link. *Gun*, *handheld* and *Zebra* all mean the scanner; *Wi-Fi* means signal; *variance* means adjustment.
- **Right now.** The guide reads the count in the picker — the guided setup, open SOS, second counts, the thresholds, the scanners, the Teams channel — and lists what is missing, red for required and amber for wanted, each with a link. Under it, **You will probably want to know** offers the questions those gaps usually raise. It refreshes every fifteen seconds.
- **Only doors you can open.** A login without Settings sees *"ask an admin"* in place of a Settings link, never a link that bounces.

Ask the guide

a question, or paste what the screen said

the gun says offline

Clear

The gun says OFFLINE. Did we lose the counts?

No. They are queued on the device and upload themselves. Do not clear the app or reinstall it.

[Try it in the Testing Suite →](#) [See the step →](#)

ON THE SCANNER · OFFLINE, THE KEYBOARD, AND ROTATION

Ask the guide: a question in plain words, the answer, and where to go.

Right now

on "Cycle count programme 2026"

What the guide can see about the count in the picker, and what you are likely to need next.

Set-up is complete

Every step the guided setup asks for is there.

40 second counts open

The guns hand them out nearest first.

[Second counts →](#)

Second-count thresholds are all 0

Every difference will raise a second count. Set Recount over, or over %, and a cap.

[Count session →](#)

No Teams channel

SOS alerts stay on the dashboard and the board. A channel is optional.

[Advanced →](#)

You will probably want to know

Does the same team recount its own bin?

Preferably not: the server offers it to another team when one is near; a lone team gets it after its own aisles.

[Dashboard →](#) [Second counts →](#) [See the step →](#)

FINISH A COUNT · WORK THE SECOND COUNTS

Second-count list is enormous

Thresholds at 0. **Set Recount over, or over %, and a cap.**

[Count session →](#)

WHAT THE SCREEN SAYS


Does an SOS work with no Teams channel?

Yes. It always goes to the dashboard Alerts tab and the office board. Teams is an extra.

[Settings →](#) [Advanced →](#) [See the step →](#)

SET THE SITE UP · SET THE SOS LIST AND THE TEAMS CHANNEL

Right now: what this count is still missing, worked out from the data.

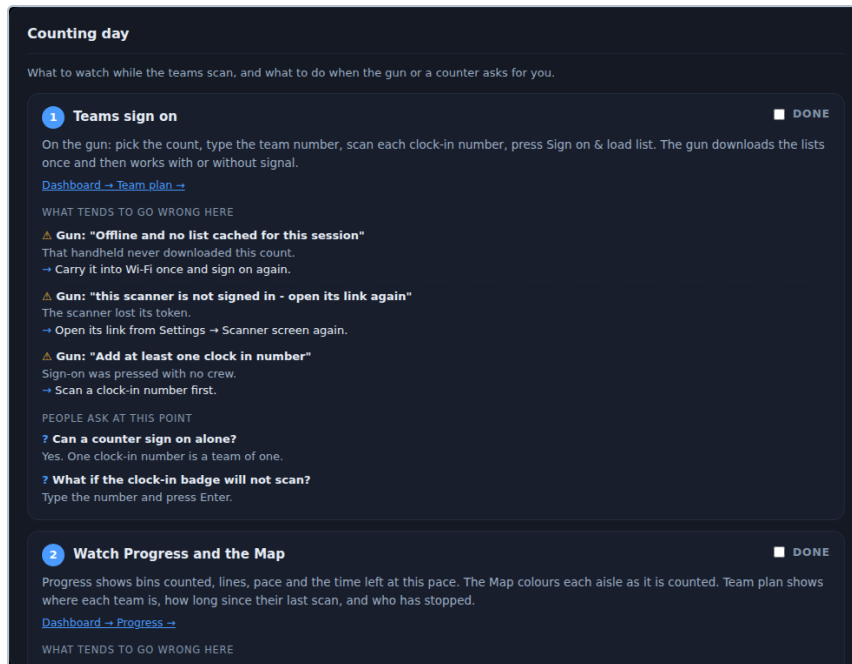

A journey open: the step, what goes wrong there, and what people ask.

Step 9 — Set up the counting screen


Settings → Scanner screen.

This is what a counter actually sees. The preview on the right is drawn at the real pixel size of the device (MC9090 is 240 × 320; MC9200 is 480 × 640) using the scanner's own stylesheet, so it cannot drift from reality.

- **The questions, in order.** Drag to reorder. The default asks for the pallet, then the quantity, then the bin. Counting **location-first** — bin, then what is in it — suits a team working a bay at a time. Lot code and expiry sit in the order too, and only appear on counts that ask for them (Part 3). A question can never be dragged off the list entirely.
- **Show contents after a pallet scan** — shows the SKU and description the ERP has for that pallet, so the counter can see they are at the right one.
- **Show the next bin in the aisle** — once a team starts a section, the gun tells them which bin comes next (001 → 002 → 003), so nothing is skipped. A bin holding several pallets keeps the guide until every tag in it is accounted for — see step 15.
- **The on-screen keyboard never appears by itself**, on any screen — not for the quantity, not for a clock-in number. The scanner is the keyboard. The **Keyboard** button on the counting screen, and **Type it instead** on the sign-on screen, bring one up for whoever has to type.

- **Update itself after a deploy** — on unless you turn it off. A scanner left running keeps the version it started with: these are installed apps that sit on a cradle overnight and are the same page in the morning. With this on, the gun compares what it is running against what the server is serving and reloads itself when it has fallen behind — **never mid-pallet, and never with counts still queued on the device**. If it is in the middle of a line it shows a green **Update ready** bar and waits for the line to finish; tapping the bar takes it at once. It reloads once for any one version: a gun that comes back still behind says *"update did not take"* rather than reloading in a loop halfway down an aisle.
- **Keep it upright** — on unless you turn it off. These are portrait handhelds held one-handed at a rack face, and a screen that flips halfway down an aisle is unusable. There is **one** way up: the installed app asks the device for it by name, and a gun flipped end over end is not "still portrait" as far as this app is concerned. Only an app that owns the screen (installed, or full screen) is allowed to ask at all — a browser tab is always refused — so when the handheld turns anyway, the app turns *itself* back: sideways gets a quarter turn, end over end gets a half turn, and either way the counting screen reads upright in the hand. It is only a picture being turned — scanning, tapping and the comments countdown all carry on exactly as before. Turn it off and the gun is left however the device turned it, with a yellow **Hold the scanner upright** strip across the top. Turning auto-rotate off on the handheld (an Android setting, not an app one) is still the tidiest fix of all.
- **Take the whole screen** — off unless you turn it on. It makes the app fill the display at sign-on, but the browser announces that with a bar carrying the site's address, right over the counting screen. **Installing the app** on the handheld (step 8) is the quiet way to lose the browser, and the one to prefer.
- **Keep the screen awake** — holds the display on while a team is counting, instead of it sleeping between bays.
- **Buzz on a good or bad scan** — useful with ear defenders.
- **Text size: Large** — for gloves and a freezer.
- **Re-key a quantity of at least** — anything this big has to be typed twice. 0 never asks twice.
- **Comments step moves on after N seconds** — how long the comments step waits before it goes to the next bin by itself. It ships at **2 seconds**: long enough to tap a reason, short enough that a counter with nothing to say is not standing there. Use **–** and **+** to change it, or type a number. **0** turns the clock off and waits for the counter. Typing or tapping a chip always stops the countdown, whatever it is set to.

Press **Save**. Scanners pick the change up within about half a minute, between pallets — nobody has to sign out.

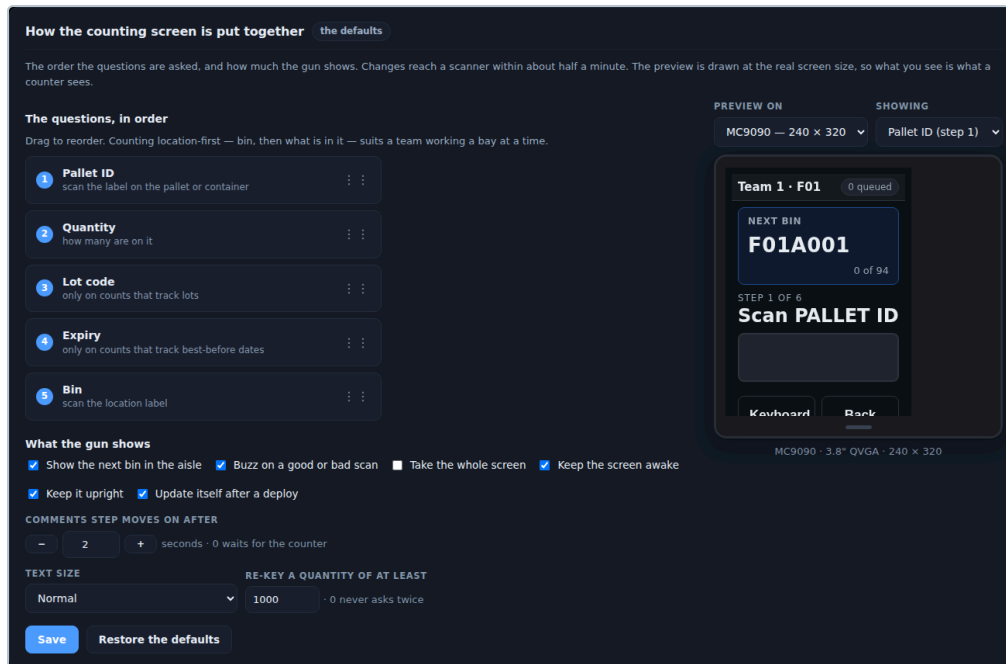

Settings → Scanner screen. Drag the questions into the order your site counts in; the preview is the real MC9090 screen size.

Step 10 — Set the one-tap reasons

Settings → Scanner screen → What the scanners offer.

Counters wearing gloves in a freezer will not type. These are the buttons they tap instead, and the reasons a site needs are its own — "Blocked by a trailer" means something here and nothing anywhere else.

- **Comments** — offered on the last step, after the bin is scanned.
- **Override reasons** — offered when a pallet ID is not on the list and the counter is allowed to accept it anyway. **Other** is always offered on the gun as well, whatever you configure.

The time the comments step waits before moving on is set with the rest of the counting screen — see step 9.

Press **Save**; again, scanners pick it up within about half a minute.

What the scanners offer

the defaults

the one-tap reasons a counter can pick, without typing

The reasons a site needs are the site's own — "Blocked by a trailer" means something here and nothing anywhere else. A scanner picks up a change within about half a minute, without anybody signing out of it.

Comments

Offered on the last step, after the bin is scanned.

Damaged

Partial pallet

Mixed pallet

Label unreadable

Needs recount

Blocked / could not reach

e.g. Frozen to the rack

Add

Override reasons

Offered when a pallet ID is not on the list and the counter is allowed to accept it anyway.

Label unreadable

New receipt, not on the report

Relabelled

Hand-written ID

Supervisor said to count it

e.g. Hand-written ID

Add

How long the comments step waits before moving on by itself is set on the [Scanner screen](#) tab, with the rest of what the counting screen does.

Save

Restore the defaults

Settings → Scanner screen → What the scanners offer. These are the buttons a counter taps instead of typing.

Part 3 — Setting up a count

Do this the day before, not on the morning of the count.

Step 11 — Create the count

Settings → Getting started → Count session → Start a new count.

1. **Name** it something you will recognise later: `Q3 2026 wall-to-wall`.
2. **Type**:
 - **Full count** — teams work whole aisles. This is a wall-to-wall.
 - **Cycle count** — a batch of bins per day or week; see Part 6.
3. **Bin list** — attach it here, or upload it later in Settings.
4. **Inventory report** — what the ERP thinks is on hand. **Attach it.** With it you get variances, second counts and an ERP adjustment file. Without it the count still records what is there, but nothing is compared against anything.
5. Press **Create count**.

The new count inherits the rack drawing the last one used, so the map works immediately.

The screenshot displays the 'Full Harvest Inventory' dashboard. The main header shows the count name 'FULL: Q3 2026 wall-to-wall' with a progress bar at 13%. Below this, a 'Count progress' section shows '13%' and '1,083 of 2,658 bins checked empty'. A 'Count programme' section lists 'CYCLE: Cycle count programme 2026' (40 second) and 'FULL: October spot check' (no bin list uploaded yet). A 'Count session' section shows 'FULL: Q3 2026 wall-to-wall' (19 second) with '1,809 of 13,673 bins - 13%' and 'last scan 1 min ago'. The dashboard includes several summary cards: '2,356 COUNT LINES', '1,003 / 2,000 LISTED PALLETS FOUND (+1 NOT ON LIST)', '3 TEAMS COUNTING', '3 SCANNERS', '1 FLAGGED LINES', and '19 open / 0 done SECOND COUNTS'. Below these are 'ERP - PALLETS FOUND' (453 / 720) and 'LEGACY - PALLETS FOUND' (304 / 480). A 'Teams on the count' table lists three teams with their scanners, employees, active aisles, and time on count. The bottom section, 'Notes on the office board', shows a note about lunch breaks and a table with a note: 'Lunch 11:30-12:00 - Team 4 breaks first'.

TEAM	SHIFT	SCANNER(S)	EMPLOYEES	ACTIVE AISLE	STARTED	TIME ON COUNT	LAST SCAN	LINES	BINS
1	—	SCANNER-01	E1043, E1088	Freezer - Aisle F02	3:03 PM	3 h 35 min	just now	1151	892
2	—	SCANNER-02	E1102, E1157	Freezer - Aisle F04	3:35 PM	3 h 03 min	just now	1027	797
3	—	SCANNER-03	E1163, E1190	Freezer - Aisle F05	6:15 PM	23 min	just now	178	120

NEW NOTE	ADD TO THE BOARD	CLEAR THE BOARD
e.g. Lunch 11:30-12:00 - Team 4 breaks first		
Lunch 11:30-12:00 - Team 4 breaks first - Dock 4 blocked until 2pm		

The count is picked in the header, on every supervisor page. Each row carries its own progress, so two counts are never confused.

Step 12 — Check the guided setup

Settings → Getting started.

A checklist worked out from what is actually in the database, not from a box somebody ticked. It tells you what is still missing and takes you straight to the screen that fixes it. For a full count it wants: the bin list, the inventory report, registered scanners, the scanner screen, racking blocks, a crew roster and a team plan.

Getting a count started October spot check - full count

Worked out from what is actually in the database, not from a box somebody ticked. Pick the count at the top of the page; the steps change for a cycle count.

2 thing(s) still needed before anyone can scan.
The rest is recommended rather than required.

- Upload the bin list** needed to start Upload it
Every location in the warehouse. It is what a scanned bin is checked against, and it defines the aisles teams get assigned to.
nothing uploaded yet
- Upload the inventory report** recommended Upload it
What the system thinks is on hand. Without it a count still records what is there, but nothing is compared, so there are no variances and no second counts.
nothing uploaded yet
- Register the scanners** Change it
Each handheld gets its own link. The server only takes counts from a scanner that has signed in with one.
4 registered · 4 signed in
- Pick the rack drawing** Change it
Draws progress over the real floor plan instead of a schematic.
using front-royal
- Pair the aisles that share racking** recommended Pair them
Two teams either side of the same rack get in each other's way. Pairing them keeps only one team in a block at a time.
every aisle is its own block
- Add the crew and the teams** Change it
Lets the app check a team has the equipment for the levels it is given, and check who signed on.
8 on the crew list · 3 team(s)
- Queue the aisles onto teams** needed to start Queue them
A guided count sends each team to its next aisle. Without a plan the scanners have nothing to hand out.
nothing queued yet

A new count: two things stop anybody scanning, the rest are recommended. Every step links to the screen that fixes it.

Getting a count started Q3 2026 wall-to-wall - full count

Worked out from what is actually in the database, not from a box somebody ticked. Pick the count at the top of the page; the steps change for a cycle count.

This count is running — 1,809 bins have a count already.
Anything still open below can be filled in as you go.

- Upload the bin list** Change it
Every location in the warehouse. It is what a scanned bin is checked against, and it defines the aisles teams get assigned to.
13,673 bins in 28 aisles
- Upload the inventory report** Change it
What the system thinks is on hand. Without it a count still records what is there, but nothing is compared, so there are no variances and no second counts.
2,658 pallets · 1,809 bins carry a last-counted date
- Register the scanners** Change it
Each handheld gets its own link. The server only takes counts from a scanner that has signed in with one.
4 registered · 4 signed in
- Pick the rack drawing** Change it
Draws progress over the real floor plan instead of a schematic.
using front-royal
- Pair the aisles that share racking** Change it
Two teams either side of the same rack get in each other's way. Pairing them keeps only one team in a block at a time.
14 block(s) of more than one aisle
- Add the crew and the teams** Change it
Lets the app check a team has the equipment for the levels it is given, and check who signed on.
8 on the crew list · 3 team(s)
- Queue the aisles onto teams** Change it
A guided count sends each team to its next aisle. Without a plan the scanners have nothing to hand out.
8 aisle assignment(s)

The same checklist once that count is ready to run: every step green, and the count already running.

Step 13 — Set the count's options

Settings → Getting started → Count session. These apply to the count picked at the top of the page, and a scanner that is already counting picks up a change within about half a minute. The questions it asks change between pallets, never mid-line.

OPTION	WHAT IT DOES	SUGGESTED
Pallet ID check	<i>Validate — allow override:</i> a pallet not on the report asks the counter Count it anyway? YES / NO ; YES counts it and it shows as a positive adjustment. <i>Validate — no overrides:</i> it cannot be counted. <i>Accept any ID:</i> no checking, though duplicates are still blocked.	Validate with override
Guided by aisle plan	Teams are sent to their assigned aisle and warned when they scan a bin outside it. Off means anyone can count anything.	On for a wall-to-wall
Ask for comments	Adds the optional comments step at the end of each pallet.	On
Auto second counts	Raises a "go back and look again" task automatically when a line disagrees with the report.	On
Show on the scanners	Untick to keep this count off the scanners' list — while it is being set up, or once the floor is done with it. The dashboards still have it, marked <i>not on scanners</i> .	On, once the lists are uploaded
Scanners start here	Every scanner lands on this count at sign-on. They can still pick another.	On, on count day
Ask for the lot code	Adds a LOT CODE question, checked against the report. Wrong lot is called out at the pallet.	On only if you track lots
Ask for the expiry date	Adds an EXPIRY question and flags anything already out of date.	On for frozen food
Recount over N units	A difference smaller than this raises no second count.	2-5 units
or over N %	...or at least this share of the expected quantity. Either threshold is enough.	5-10 %
Cap open	Stop raising automatic second counts once this many are open, so the list stays walkable.	50-100

OPTION	WHAT IT DOES	SUGGESTED
Adjustments need approval	Every difference from the report has to be approved, with a reason code, before it reaches the ERP file. Off by default.	On for a wall-to-wall that is audited
Approve over N units	A difference smaller than this goes through without a signature.	5-10 units
or over N %	...or at least this share of what the report expected. Either threshold is enough.	5-10 %
Map drawing	Which rack drawing the map uses. <i>Schematic</i> builds one from the bin codes.	Your drawing

Why the thresholds matter. With both at 0 the app sends somebody back for a one-unit difference, and by mid-morning the second-count list is longer than the count. Set them once and the list stays short enough that people actually walk it.

Settings → Getting started → Count session: every option above, on one card, for the count picked at the top of the page.

Step 13a — A trial run, before the real count

Settings → Getting started → Count session → Trial run.

The way to find out that a crew does not know the empty-bin button, or that an aisle has no rack labels, is to run the count for real a shift or a day before it matters. **Make this a trial run** turns the count into a rehearsal on the same bin list, report and team plan:

- the guns show **TRIAL RUN** in the header, and so do the dashboard and the office board;
- nothing can be sent to the ERP, and nothing counted moves a bin's *last counted* date;
- everything else works exactly as on the day — teams, aisles, SOS, second counts, reports.

When it is done, **End the trial — clear it for the real count**, and type **CLEAR**. Every line, sign-on, SOS and second count goes; the bin list, the report, the team plan and every setting stay, and each team's aisles go back to the start. The guns are told the next time they check in (within a minute, between pallets): they forget what they counted in the trial, so no pallet comes back as "already counted", and a trial line a gun sends late is dropped.

Step 14 — Give the teams their aisles

Dashboard → Team plan.

Either upload a **counting plan** (Settings → Lists & racking → Counting plan: one row per aisle, in the order each team counts it, with the levels their equipment reaches), or queue aisles by hand here.

- A team's next aisle starts automatically as soon as the block it belongs to is clear. That is what staggers the crews apart.
- A team is not sent where its equipment cannot reach: if the roster says a crew is on foot, they will not be queued onto level D. A supervisor can override this.
- Two teams **can** share one aisle as long as their levels do not overlap — a forklift crew high and a crew on foot low.

Auto-assign the aisles. The card above the queue does the whole plan at once, staggered:

1. Pick the **teams** (blank is every team on Teams & crew, or one **shift**), the **levels** (blank is all), and which way to **walk the aisles**.
2. **Preview.** The aisles are split into one continuous stretch per team, about the same racking each, so the teams start spread across the building and never bunch up. A team gets only the levels its equipment reaches; what it cannot reach goes to the nearest team that can, after its own stretch (marked *). The preview lists each team's aisles in order, with warnings — two teams starting in the same racking block, a level nobody can reach — and what it left alone.
3. **Queue this plan.** Each team's first aisle starts at once. **Replace what is queued** re-plans the queued aisles and leaves anything being counted, or done, alone.

The rules it follows are shown on the card, with what to fix if one is missing: **racking blocks** (step 7 — without them two teams can be released into back-to-back racking), **equipment** on Teams & crew (a team with nobody on it is given every level), and the **shift**.

Team assignments

Queue aisles per team in counting order, with the **levels** that team's equipment covers (A-C on foot, D-F with the lift, A-F for all). Levels are required. Two teams can share an aisle on different levels. A team's next aisle waits while another team holds those levels in its racking block — that is what staggers them. Which aisles share racking is set under [Settings](#).

TEAM	AISLES, IN ORDER	LEVELS (REQUIRED)	
3	F01, F03, F05	A-C	Queue

Team 1

Freezer → Aisle F01 → levels A-F [reopen](#) [Freezer - Aisle F02 · levels A-F](#) [done](#) [release](#) [Freezer - Aisle F07 · levels A-F](#) [start](#) [x](#)

in Freezer - Aisle F02, levels A-F

Team 2

Freezer → Aisle F03 → levels A-F [reopen](#) [Freezer - Aisle F04 · levels A-F](#) [done](#) [release](#) [Freezer - Aisle F08 · levels A-F](#) [start](#) [x](#)

in Freezer - Aisle F04, levels A-F

Team 3

[Freezer - Aisle F05 · levels A-F](#) [done](#) [release](#) [Freezer - Aisle F06 · levels A-F](#) [start](#) [x](#)

in Freezer - Aisle F05, levels A-F

Dashboard → Team plan: each team's aisles in counting order — what they are on now, and what is queued behind it.

Full Harvest Inventory

Front Royal

Q Search anything...

COUNTING

- Dashboard
- Cycle counts

WAREHOUSE JOBS

- Front bins
- Not in Location

THE SITE

- Teams & crew**
 - Crew & teams
 - Equipment rules
- Settings

LEARN

- Testing Suite
- User guide

Dana Whitfield · admin

[Change my password](#)

[Log out](#)

Teams & crew

8 people · 3 teams

[Crew & teams](#) [Equipment rules](#)

Crew list

clock in number, name, department, equipment

CSV OR EXCEL FILE

[Choose File](#) No file chosen [Replace the whole list](#) [Upload](#) [Sample CSV](#) [Export current list](#)

Columns matched by name: **Clock in Number** (also accepts Badge, Employee ID), then Name, Department, Equipment. Equipment can be a list — Scissor lift; High reach. Spellings like *forklift*, *reach truck*, *pallet jack* are understood.

CLOCK IN NUMBER	NAME	DEPARTMENT	EQUIPMENT	
E1042	Full name	Freezer	☐ Dock truck ☐ Scissor lift ☐ High reach truck	Add / update

Teams

drag people between the crew list and a team — or use the menu on a card

NEW TEAM	SHIFT	NOTES	
3	Not set	e.g. freezer, dock side	Add team

DEPARTMENT [Every department](#)

Not on a team

Drag someone onto a team to assign them.

Nadia Haddad — no team — [Remove](#)

E1204 · Warehouse · reaches level A

On foot

Owen Blackwell — no team — [Remove](#)

E1219 · Warehouse · reaches level A

Dock truck

Team 1 [Shift not set](#) [reaches levels A-F](#)

Between them: High reach truck, Scissor lift, Dock truck, On foot

Marcus Obl [Team 1](#) [Remove](#)

E1043 · Warehouse · reaches levels A, C, D, E, F

High reach truck Scissor lift

Priya Raman [Team 1](#) [Remove](#)

E1088 · Warehouse · reaches level A

Team 2 [Shift not set](#) [reaches levels A-F](#)

Between them: Dock truck, On foot, High reach truck, Scissor lift

Ava Delgado [Team 2](#) [Remove](#)

E1157 · Warehouse · reaches level A

Dock truck On foot

Tom Zielinski [Team 2](#) [Remove](#)

E1102 · Warehouse · reaches levels A, C, D, E, F

Teams & crew (/ teams): the crew list and who is on which team. Equipment is what decides which levels a team can be sent to.

1st and 2nd shift. Each team on Teams & crew has a **shift** — set it when you add the team, or on the team's card. The page can show one shift at a time, and so can the team table on the dashboard, so the 2nd-shift lead sees only their crews.

Physical Inventory Counting · SOP

29

Part 4 — Counting day

Step 15 — The counter's procedure (on the handheld)

There is a film of this. `docs/gun-demo.webm` (about four minutes) is a recording of the real app on real data, working through everything below: signing on, counting a pallet, a bay with three tags, two labels on one pallet, a label that will not scan, an empty bin, a pallet nobody expected, a message from the office, voiding a line, losing the wifi, and handing the aisle back. Open it in any browser. It is worth showing a new crew before their first shift.

English or Spanish

The button at the top right of every screen switches the gun between English and **Español**. It stays that way on that scanner until somebody switches it back. Everything the counter reads is translated; what reaches the office — the lines, the SOS, the reasons — stays in English, so the office reads one language whoever counted.

Signing on

1. Open the app from the home screen. It shows the scanner's own name.
2. Pick the **count session** (it lands on the default one).
3. Enter the **team number**.
4. Scan or type every **clock-in number** on the crew, pressing Enter after each. Tap a number to remove it.
5. Press **Sign on & load list**. The handheld downloads the bin and pallet lists for that count and can work from then on **with no signal**.

Signing on: the count, the team number, and every clock-in number on the crew.

Counting a pallet

The gun asks one question per screen, in the order the site configured:

1. **Scan PALLET ID** — the gun says which pallet, and nothing about what is on it. **This is a blind count:** the counter counts what is in front of them, not what the system expects.
2. **Enter QUANTITY** — big numbers may have to be typed twice.
3. **Scan LOT CODE / Enter EXPIRY** — only on counts that ask for them. A lot that disagrees with the report, or a date already past, is called out on the spot.
4. **Scan BIN LOCATION** — it says where that bin is and which face it is on.
5. **Comments** — optional. Tap a reason or type a note; leave it and the gun moves on by itself after a couple of seconds (Settings → Scanner screen sets how long). Typing or tapping a reason stops the countdown.

The line is saved on the handheld the moment the last question is answered, and pushed to the server whenever there is a signal. The header shows `online` / `OFFLINE` and how many lines are still queued.

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

URGENT · DANA WHITFIELD → EVERY TEAM

Fifteen minute break at 10:30, leave the guns on charge

Got it

Signed on: Marcus Obi, Priya Raman
High reach truck + Scissor lift + Dock truck + On foot - reaches levels A-F

Team 1 — your aisle

F02
Freezer - Aisle F02 · levels A-F
240 of 618 bins have a count · next: Freezer - Aisle F07 ABCDEF

F02A001 F02A002 F02A003
F02A004 F02A005 F02A006
F02A007 F02A008 F02A009

After sign-on — the aisle this team has been given, what is queued behind it, and any second counts waiting

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

STEP 1 OF 6

Scan PALLET ID

Keyboard Back

Bin is EMPTY — scan the bin

Several empty bins in a row

Second label on the same pallet

Label will not scan

Counted F02-357
43 @ F02C065 · flagged

My aisle History

Question 1 — *Next bin* tells the team which bin comes next in the aisle, so nothing gets skipped

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

Pallet **F02-358**

STEP 2 OF 6

Enter QUANTITY

Keyboard Back

This pallet has another label

Pallet F02-358
Now enter what you count

My aisle History

Report a problem — damage, blocked bin

SOS — I need help

Question 2 — the pallet is recognised; the gun does not say what is on it, so the count is blind

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

Your aisle **Freezer - Aisle F02 · levels A-F**

Pallet **F02-358**
Qty **50**

STEP 3 OF 6

Scan LOT CODE

Keyboard Back **Skip**

Qty 50

My aisle History

Report a problem — damage, blocked bin

SOS — I need help

Questions 3 and 4 — only on counts that ask for them. A lot that disagrees with the report is called out here, not a week later in a report

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

Pallet **F02-358**
Qty **50**

STEP 5 OF 6

Scan BIN LOCATION

Keyboard Back

Bin label will not scan

Expires 2028-01-25

My aisle History

Report a problem — damage, blocked bin

SOS — I need help

The last required question — the gun says where that bin is and which face it is on

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

Pallet **F02-358**
Qty **50**

STEP 6 OF 6

Comments (optional)

Type a note or tap one b

Damaged Partial pallet Mixed pallet
Label unreadable Needs recount
Blocked / could not reach

Moving on to the next bin in 1...

Keyboard Back **Skip**

Bin F02C066
Level C · Position 066 · BACK

My aisle History

Report a problem — damage, blocked bin

Comments — tap a reason rather than type one. Left alone, the gun counts down and moves to the next bin by itself

A bin with more than one pallet in it

Four pallet tags in one position is ordinary, and the guide stays put until they are all counted. After the first tag the banner turns amber and reads **Still in this bin** with a tally — *2 of 4 tags* — taken from the inventory report, so the team knows what is left to find before they walk on.

- Scan the next tag in the same bin. The tally goes up; when the report's pallets are all accounted for, the banner turns back to **Next bin** on its own.

- If the report is wrong and there is nothing more there, tap **Nothing more here** →. The bin is closed and the guide moves on.
- A bin the report lists nothing for stays open after a count, for the same reason — there may be a second pallet in it that the ERP has never heard of. Tap **Nothing more here** → when it is clear.
- **Bin is EMPTY** closes a bin outright.
- **This pallet has another label** — on the quantity screen, right after the pallet scan. A pallet wearing two tags: tap it, scan the other tag, and carry on with the quantity. The pallet is counted once; the second tag is saved beside it with no quantity, so neither label comes up as uncounted. (**Second label on the same pallet**, on the pallet screen, does the same after the line is saved.)
- **Report a problem** — damage (a pallet, the racking, the product), a bin **blocked** by a trailer or a forklift to come back to, or something else. Pick what, then why, add a word if it helps. It goes on the office's **Fix list** against the bin and pallet in hand, with no bar and no chime — it is not an emergency, that is what **SOS** is for. With no signal it is kept and sent later.
- **Several empty bins in a row** — for a stretch of an aisle with nothing in it. Scan the **first** empty bin and the **last**; the gun lists every bin between them in walking order, already ticked. Untick any that are not empty, then **Mark N bins EMPTY**. Each is recorded as its own empty bin, exactly as if they had been done one at a time; bins already counted are shown and left alone.

The tally counts what the whole team has done, not just this scanner, so two handhelds working the same aisle never double-walk a bay or leave one half counted.

#1 · Q3 2026 wall-to-wall

SCANNER-01 · T1 online Español

STEP 1 OF 6

Scan PALLET ID

Keyboard Back

Bin is EMPTY — scan the bin

Several empty bins in a row

Second label on the same pallet

Label will not scan

Counted F02-363
45 @ F02C070

My aisle History


One tag into a position that holds three: the banner turns amber and stays on the bin until the other two are counted, or somebody says there is nothing more there.

A pallet with two labels on it


A re-tagged pallet that kept its old label, or one built from two, has two barcodes and is one pallet. Counting both as pallets doubles the stock; ignoring one leaves a live label for the next team to find.

1. Count the pallet once, as normal.
2. Tap **Second label on the same pallet**.
3. Scan the other label.

The tag is recorded against the pallet it is stuck to, with no quantity of its own. It shows on the pallet report as **SECOND LABEL**, the pallet it belongs to says *also tagged*, nobody is sent back for it, and it never reaches the ERP file as an adjustment. If the second tag is not on the inventory report, the gun offers the same answer in the "Pallet not on the list" screen.

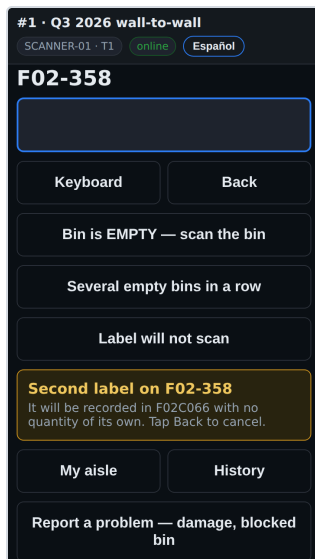

The gun asks for the other label and names the pallet it will belong to

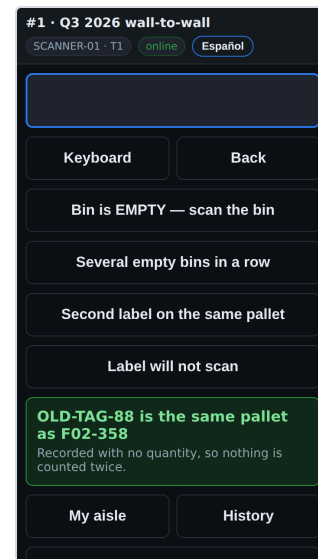

Recorded as the same pallet, with no quantity — so the stock is not counted twice


The SOS button

At the bottom of the counting screen, in red: **SOS — I need help**. A counter in the middle of a freezer aisle cannot radio the office through ear defenders, and walking out to find somebody is five minutes.

1. Tap **SOS**.
2. Pick what is wrong from the list — your site's own list, set in Settings.
3. Add a note if it helps, then it sends.

It carries the team, the aisle and the last bin counted, so nobody has to explain where they are. Within seconds it is on the dashboard, and in your Teams channel if one is set up. The bar at the top of the gun says **SOS sent** while it is waiting, and changes to **Dana has seen your SOS** the moment a supervisor picks it up — which is the thing the person who pressed it is waiting to know.

With no signal it says so. "No signal — this has NOT been sent." It keeps trying and sends the moment there is a signal, but a counter is told the truth rather than left believing help is coming. If it cannot wait, walk to where there is signal or go and find somebody.

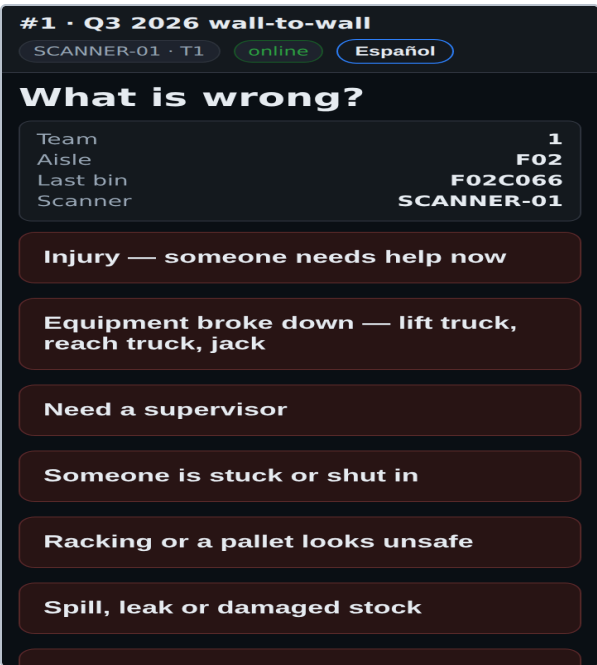

The SOS list — the site's own words, in buttons big enough for a gloved hand in a hurry.

The green "Update ready" bar

A new version of the app is on the server and this scanner has not got it yet. Nothing is wrong and nothing needs doing: it loads itself the moment the pallet in hand is finished and everything counted has reached the server. Tap the bar if you would rather take it now.

When a label will not scan

Freezer labels come off, ice over, get clipped by a forklift. The pallet is still there and still has to be counted, so the gun has a way out that keeps the count going and tells a supervisor where to send somebody with a label printer.

The same button is on both steps that read a label — **PALLET ID** and **BIN LOCATION** — and asks the same question: can you read it or not?


On the PALLET ID step — tap Label will not scan:

CHOICE	WHAT HAPPENS
I can read it — let me type it	The keyboard comes up, the counter types the number off the label, and counting carries on as normal. The line is flagged as a barcode to replace


CHOICE	WHAT HAPPENS
Nothing readable on it	The pallet is counted anyway, under a name made from its bin — <code>NO-LABEL-F01A001-1</code> . Give the quantity and scan the bin as usual

On the **BIN LOCATION** step — tap **Bin label will not scan**:

CHOICE	WHAT HAPPENS
I can read it — let me type it	The keyboard comes up and the counter types the bin code. It is checked against the bin list, the team's aisle and its levels exactly like a scan
It is F01A005	The app names the bin it believes the counter is standing at — the one the guide is on, the one they are already counting out of, or the one the report puts this pallet in — and one tap takes it. Checked the same way
No readable bin label	Only when the app has nothing to offer. The line is recorded against the aisle rather than being lost, and flagged as an unknown bin for a supervisor to sort out

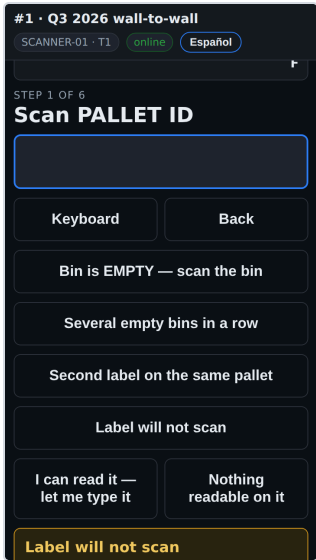

On the pallet step: can you read it, or not?

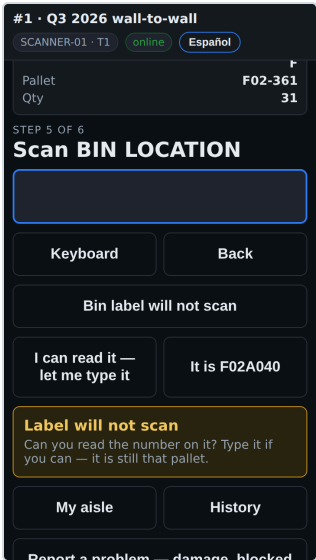

On the bin step the app offers the bin it believes you are at, so nobody types a code off a rack leg in a freezer

Either way the pallet still gets counted — walking away from it is the one thing that would put the count out.

The line is marked either way, and the bin turns up on **Dashboard → Reports → Labels to replace** with what was counted there. A pallet with nothing readable on it counts as a pallet not on the report, so it also shows on the pallet report as `NOT IN MASTER` — which is exactly what it is until somebody puts a label on it.

Print the rack labels first. A pallet's bad label costs one counter one minute. A bin's costs every counter who walks up to that bay for the rest of the count — and the put-away driver afterwards. The relabel list marks them **RACK** and puts them at the top.

A message from the office

A supervisor can put a line on this team's scanners from the dashboard — *"come to the dock when you finish this aisle"*, *"leave F12, the forklift is in it"*. It arrives within about twenty seconds, buzzes, and sits on the screen until somebody taps **Got it**. An urgent one is red. Tapping Got it tells the dashboard who read it.



A message waiting on the counting screen. Nothing else is blocked — the scan box is still live underneath it.

The other buttons

BUTTON	WHEN TO USE IT
Keyboard	Brings the on-screen keyboard up to type an entry by hand — a number pad on the quantity step. It never appears on its own: the scanner is the keyboard, and a keypad covers half the screen. Tap it again to put it away
Back	Wrong entry — steps back one question
Skip	Lot, expiry or comments the pallet does not have
Bin is EMPTY	The bin is genuinely empty. Scan the bin; it is recorded as counted and empty
My aisle	Back to the assignment screen

BUTTON	WHEN TO USE IT
History	The last 50 lines from this scanner. Void removes a wrong line from the totals
Aisle complete — next aisle	Only when the aisle is finished. It frees the racking block and releases the team's next aisle



*History: the last 50 lines this scanner counted. **Void** takes a wrong one out of the totals.*

When the gun stops and asks

A pallet that is not on the list is one question: **Count it anyway? YES** counts it — flagged, and it shows up for a supervisor under **Adjustments** as a pallet to add (a positive adjustment). **NO** if it was simply the wrong barcode.

An unknown bin, a pallet already counted, a bin outside the team's aisle or level — the gun asks why before it will take the line. Pick a reason from the list (or **Other**), add a note if it helps, and press **Accept and continue**. The line is saved and flagged for a supervisor. **Cancel — rescan** if it was simply the wrong barcode.

#1 · Q3 2026 wall-to-wall
SCANNER-01 · T1 online Español

Pallet not on the list

NO-LABEL-4471 is not in the uploaded pallet file.

Scanned NO-LABEL-4471

Count it anyway?

YES NO

It is a second label on F02-358

#1 · Q3 2026 wall-to-wall
SCANNER-01 · T1 online Español

Pallet already counted

F02-357 was already counted in bin F02C065 on this scanner.

Pallet: F02-357
Counted in: F02C065
By team: 1

REASON (REQUIRED TO CONTINUE)

Relabelled

NOTE (OPTIONAL)

old label left on

Accept and continue

Cancel — rescan

A pallet that is not on the inventory report: **YES** to count it, **NO** to rescan

Everything else asks why. The reasons are the ones set in Settings — your site's words. **Other** is always offered

Not in Location (the pallets the system has lost track of)

Not in Location in the sidebar is the site's list of pallets that are not where the ERP says — upload it (Pallet, Item, Description, Qty, Lot, **Last known location**, Note) or type one in. Every scanner then watches for them: the moment any gun scans one, during any count or move, it is marked **found** with the bin, the team and the time, and the counter is told on the gun (*"F03-118 was on the Not in Location list — found!"*). **Found in...** marks one by hand; **Close** writes one off with the outcome. The list is the site's, not a count's: a pallet stays on it across counts until it turns up or is closed. It downloads as a CSV.

Moving pallets back (a job of its own)


Front bins → Pallets to move back builds the list — every pallet the report puts in a front bin with an empty bin behind it — or takes one you upload (Pallet, From bin, To bin). The guns then offer **Move pallets** at sign-on while any are waiting:

1. Pick **Move pallets**, the count, team and clock-in numbers, **Sign on**.
2. Pick an **aisle** — each shows how many are waiting.
3. The gun names the pallet, where it is and where it goes. **Scan the pallet** (the wrong one is refused), move it, **scan the bin it went into** (the front bin it came from, or any other bin, is refused). The next pallet comes up.
4. **Cannot move it** — the bin behind is not empty, the pallet is not there, cannot reach it, damaged — skips it with the reason, for the office.

The move desk. *Front bins → Move desk* is for the person doing the moves in the pallet system rather than on a gun: the next pallet, the bin it is in and the bin it goes to sit at the top, with < > to step through the list, and the pallet system's own screen opens underneath, framed at the size of a

1. Done moves update the report, so the count that follows expects the pallet where it now is. With no signal they queue and send later, like count lines.

Front bins → Pallets to move back: the list built from the report, and how each one went

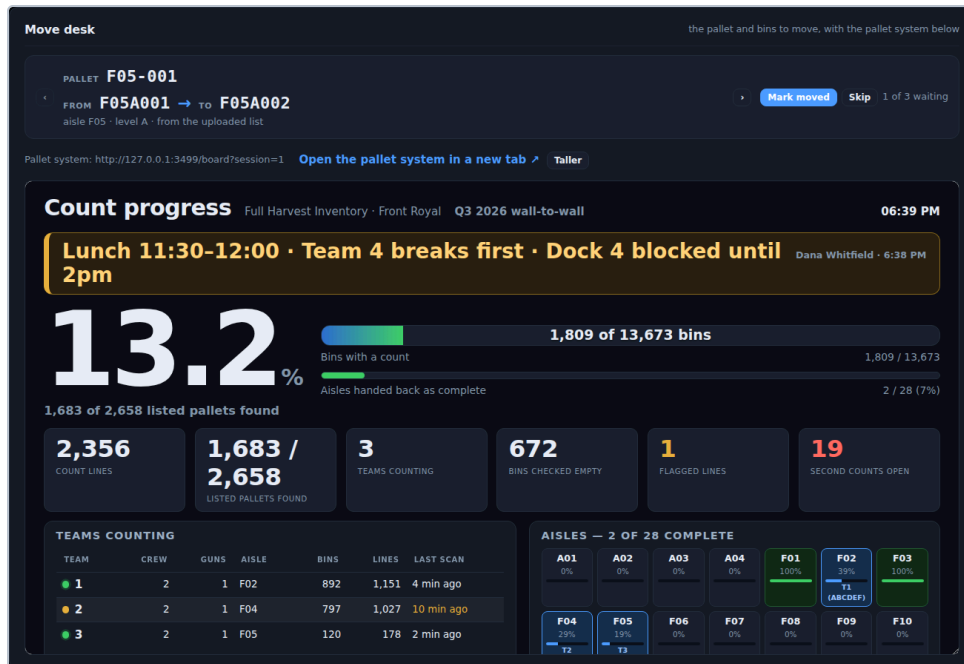

The move desk: the next pallet and its two bins at the top, the pallet system underneath.

Pallet system
the web address of the system the pallets live in, framed under the Front bins move desk

On **Front bins** → **Move desk** the pallet and bins to move sit at the top and this address opens underneath, so the move is made in that system without leaving the page. Some systems refuse to be shown inside another page (their *X-Frame-Options* or content-security policy); the desk then offers **Open in a new tab** instead.

ADDRESS

[Save](#)

Settings → Advanced → Pallet system: the address the desk opens, set once.

Step 16 — The supervisor's procedure (on the dashboard)

Dashboard, with the count picked in the header. It refreshes itself every 30 seconds, fetching only the tab on screen (plus the progress figures and the alerts, which are light), so three dashboards left open on a big count do not keep rebuilding the pallet report.

How it looks is up to you: **Settings** → **Advanced** → **Appearance** offers four themes — *Midnight* (dark blue), *Graphite* (dark grey), *Daylight* and *Frost* (light) — nine accent colours, the text size, how tightly the tables sit, the corners, the sidebar's width and the strength of the lines. It is kept per computer, so the office TV can be dark and a desk can be light. The same tab holds the **site name**: what the app calls itself (*Full Harvest Inventory* out of the box) and the location under it (*Front Royal*). Change either and it lands at once on every supervisor page's sidebar, the sign-in screen, the window titles, the scanner app's header, the office board and the name of the installed app; a blank name goes back to the default. The tab also takes a **logo**: your company's mark at the top of the sidebar and, if you tick it, in the header of every scanner.

Appearance how the supervisor pages look on this computer

A theme, an accent colour, the text size, how tightly the tables sit, the corners, the sidebar's width and the strength of the lines. Kept in this browser, so each person's computer can be set its own way; the scanners are not affected.

Midnight (dark blue) ▼

Accent ● ● ● ● ● ● ● ● ●

Text size Normal ▼

Density Comfortable ▼

Corners Rounded ▼

Sidebar Normal ▼

Lines & borders Normal ▼

Back to the defaults

Settings → Advanced → Appearance: theme, accent, text size, density, corners, sidebar and contrast — per computer.

Site name what the app calls itself, and the location under it

Shown at the top of the sidebar on every supervisor page, on the sign-in screen, in the scanner app's header and the office board, and as the name of the installed app. A change lands everywhere at once; scanners pick it up the next time they are online. Leave the name empty to go back to **Full Harvest Inventory**; the location may be blank.

NAME	LOCATION
Full Harvest Inventory	Front Royal

Save

The site name card: the name and the location, changed here and shown everywhere.

Logo your company's mark at the top of the sidebar, and on the scanners if you like

PNG, JPEG, WebP, GIF or SVG, under about 400 KB. A wide mark on a clear or dark background sits best; it is shown no taller than 56 pixels here and 22 on a gun. Scanners pick it up the next time they are online.

No logo yet — the  mark is shown.


IMAGE FILE

Choose File No file chosen Upload


☒ Show it on the scanners too

The logo card: one upload, shown on every supervisor page and, if ticked, on the scanners.

- **Progress** — lines, bins counted, pallets, exceptions; and a row per team with its **shift**, what it is counting right now, **when it started**, a **clock** of its time on the count, and when it last scanned. *All shifts / 1st shift / 2nd shift* above the table narrows it. A team's clock stops when it signs off on the gun or finishes its last aisle. When the report carries a **System** column — three systems' stock in one warehouse — a tile per system shows how many of its pallets have been found, and the pallet report, adjustments and ERP files can each be narrowed to one system. The scanners never see the difference.

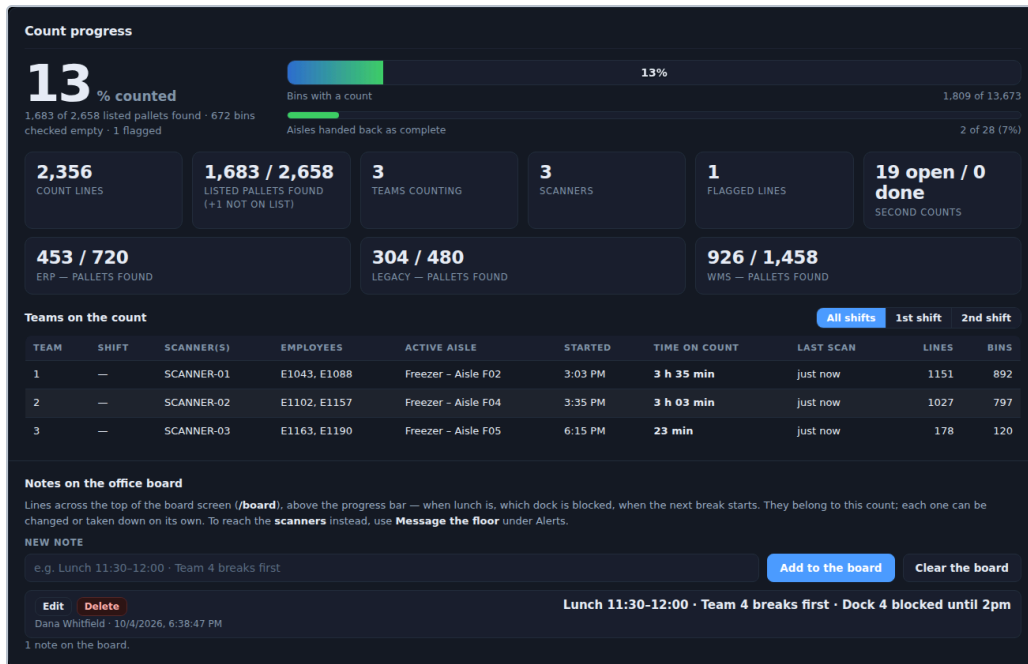


Progress: the count in numbers, then a row per team with its shift, aisle, clock and last scan.

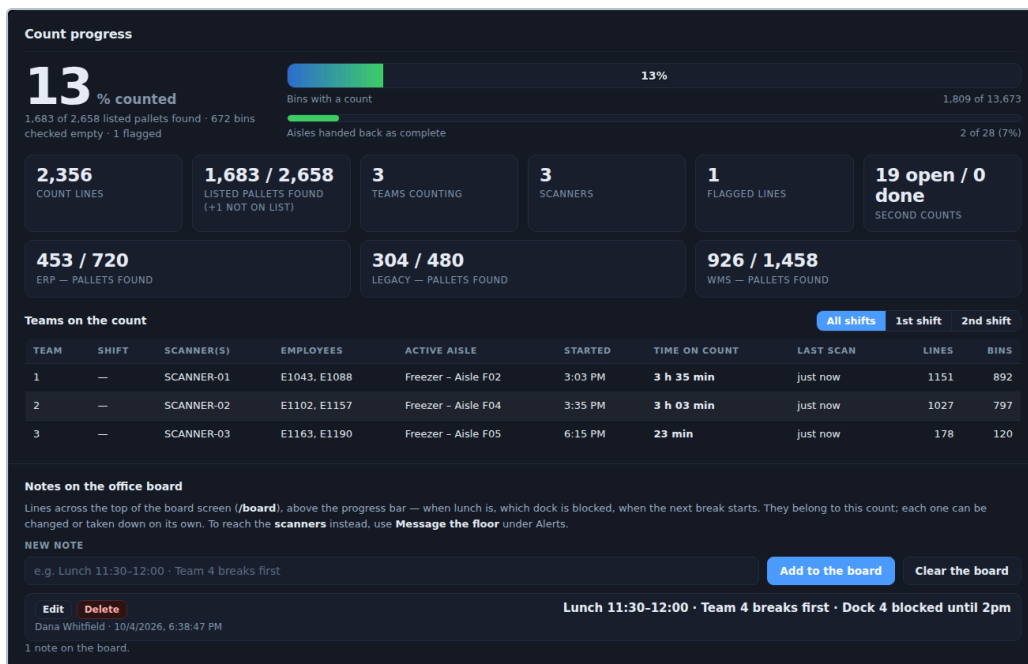

Pallets found, per source system.

- **Stopped scanning** — a team that is signed on and still has an aisle, but has not scanned for the site's limit (Settings → Scanner screen, 10 minutes to start), gets an **amber bar above every tab**, and its last scan turns amber in the table. **On break** (30 minutes) and **Lunch** (45) quiet it for that long; **Seen — I am on it** quiets it until the team scans again. If the site turned it on, the same alert goes to the Teams channel.

- **Map** — the warehouse from above. Aisles are outlined by state: not started, being counted now (with the team's number), done. Click an aisle for its bins, who counted it and what is flagged.

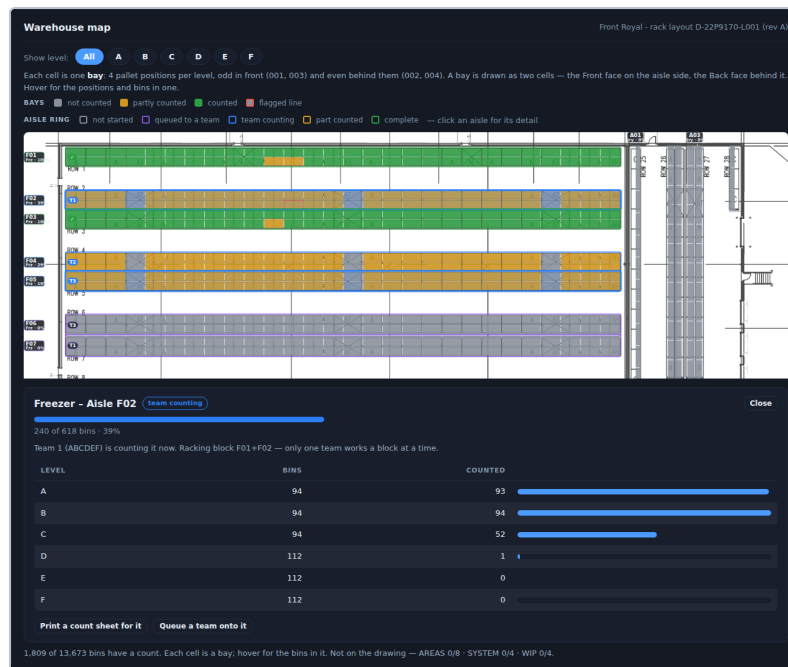

Dashboard → Map, with an aisle picked: 240 of 618 bins, level by level, and which team holds that racking block.

- **Team plan** — who is where, queue the next aisles, hand an aisle back. It also holds **Message the floor**: type a line, pick one team or all of them, tick **Urgent** if it cannot wait. The table underneath shows who has read each one — 2 of 3 means a scanner has not seen it yet, so do not assume. **Take it down** removes a message from the handhelds without losing what was said.

Message the floor a line on the scanners of one team, or all of them

It lands on the handheld within about twenty seconds and stays on the screen until a counter taps **Got it** — so this shows who has actually read it, not who was told.

TO **MESSAGE**

Every team ☐ Urgent Send

SENT	TO	MESSAGE	READ BY	
6:38:47 PM	every team	Fifteen minute break at 10:30, leave the guns on charge urgent	0 of 3	Take it down
6:38:47 PM	team 2	Skip F04 level D — the forklift is in it until 11	1 of 1 SCANNER-02	Take it down

Message the floor, under Alerts. "1 of 1" with the scanner named is a message that landed; "0 of 3" is one nobody has looked at yet.

- **Second counts** — see step 18.
- **Adjustments** — **Positive and negative** at the top, on every count: stock to add (found more, or a pallet not on the report) and stock to take off (found less, or not found), with the units and the net. Click a side to list it, and download that list. Below it, on counts with approvals turned on, who signed for each one; see step 20.

- **Reports** — see step 19.

Watch for, during the count:

- Exceptions climbing on one team — usually a training problem, worth a radio call.
- A team stopped for a long time — dead battery, or stuck behind a trailer. The amber *stopped scanning* bar is there so you do not have to watch for it.
- An aisle nobody has started by mid-afternoon.

Step 16a — Answering an SOS

Anywhere on the dashboard. An SOS from a scanner appears as a red bar across the top of the page, whichever tab you are on, and makes a noise once. It names the team, what is wrong, the aisle and the last bin they counted, and whoever is on that gun.

- **I am on it** — tells the scanner somebody has seen it, by name. This is the one that matters: the counter is standing in an aisle waiting to know that anybody at all has picked it up.
- **Close** — ends it, and asks what happened. That goes in the log, and to Teams if the channel is set up, so nobody drives over for something sorted twenty minutes ago.

Every alert, open or closed, stays in **Alerts → SOS from the floor**, with who raised it, when, what happened and whether the Teams channel took it.

SOS · team 2 — Racking or a pallet looks unsafe
aisle F04 · last bin F04A012 · SCANNER-02 · E1102, E1157 · 6:39:26 PM
"Bay 12 in F04 is leaning"

I am on it

Close

An SOS above the page: team, what is wrong, where they are, and the two things a supervisor can do about it.

SOS from the floor
raised on a scanner · newest first

A counter presses one button and picks what is wrong. It lands here, and in your Teams channel if one is set up (Settings → Advanced). **I am on it** tells the scanner somebody has seen it — which is what the person who pressed it is waiting for. **Close** ends it, with a note of what happened.

WHEN	TEAM	WHAT	WHERE	SCANNER	STATE	SENT ON
10/4/2026, 6:39:26 PM	2	Racking or a pallet looks unsafe — Bay 12 in F04 is leaning	F04 · F04A012	SCANNER-02	OPEN	teams off

I am on it

Close

Alerts → SOS from the floor: every call, open or closed, and what became of it. The tab carries a badge until the open ones are cleared.


Step 16b — Finding anything: the search box

Every supervisor page, top of the sidebar. One box. Press / from anywhere on the page (or **Ctrl-K**) to jump into it.

It searches two things at once:

- **Your data** — a pallet ID, an item number, a word from a description, a bin code, a lot, an aisle, a name or clock-in number, a scanner, a count, a second count, an adjustment, something the office said to the floor, or a line in the log. Each hit carries the answer rather than just a link: a pallet shows what the report expected, what was counted, in which bin and by which team.
- **The app itself** — "upload bin list", "keyboard", "approve", "racking blocks", "lunch note". These come back under **Go to** and take you to the card that does it, on whichever page it lives.

Choosing a hit takes you there: a tab on this page, or a page load that lands on the right tab. A lot code goes one better — it fills the lot box and runs it.

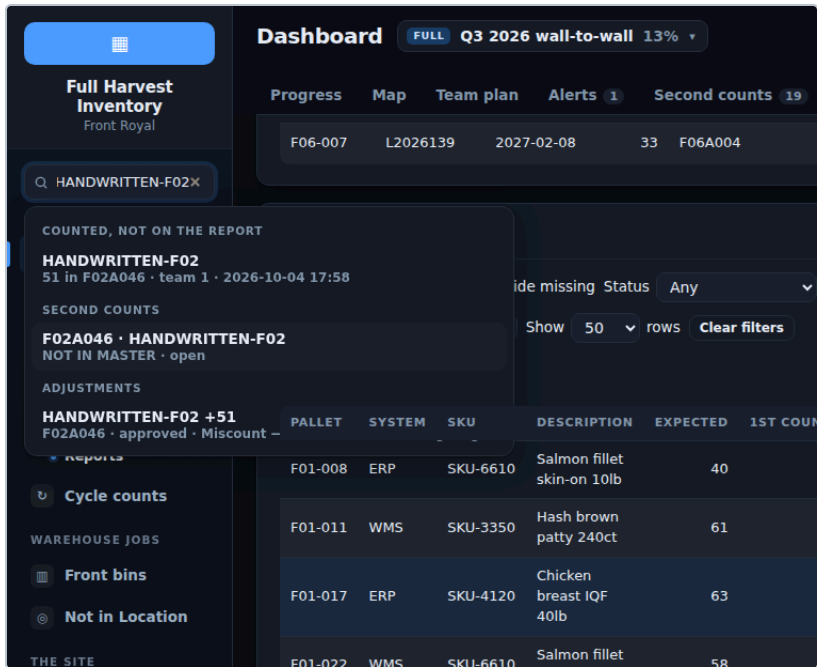

Typing a pallet ID: what the report expected and what was counted, the second count raised for it and the adjustment waiting to be signed — without opening any of those three cards.

Step 17 — The office board

Put `/board` on the office TV. It needs no sign-in and is read-only: the percentage counted, bins with a count, aisles handed back as complete, a row per team with what they are on, and every aisle as a tile coloured by state. It deliberately shows no pallet IDs and no clock-in numbers.

It follows the newest open count on its own. To pin it to a particular one, add the session to the address: `/board?session=12`.


Lunch 11:30-12:00 · Team 4 breaks first · Dock 4 blocked until 2pm

Dana Whitfield · 6:38 PM

The note across the top of the board, above everything else — because it is the one thing somebody walking past is looking for.

The notes across the top. *Dashboard → Progress → Notes on the office board* writes lines that appear above the progress bar on the board, big enough to read from across the room: "Lunch 11:30-12:00 · Team 4 breaks first", "Dock 4 blocked until 2pm". They belong to the count and say who wrote them and when; each has **Edit** and **Delete**, and **Clear the board** takes them all down.

Use the notes for anything the floor reads walking past. To reach the **scanners** instead — one team, or all of them, with a read receipt — use **Message the floor** under Alerts (step 16).

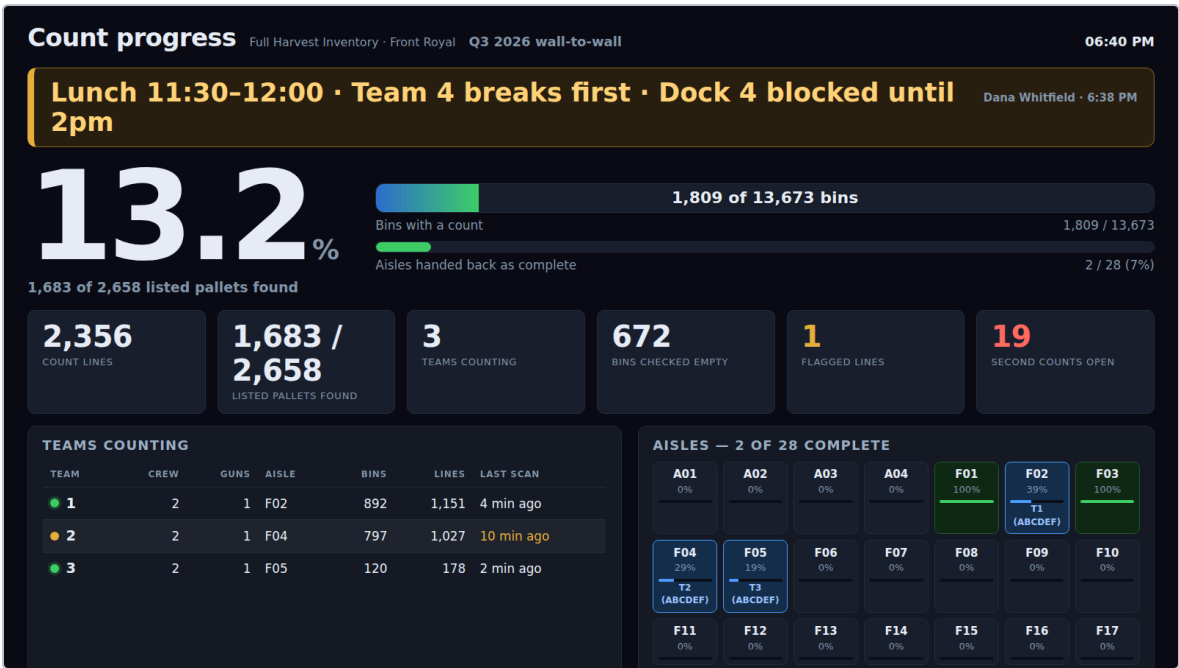

The office board, for the TV: percentage counted, aisles complete, every team, and every aisle coloured by state.

Part 5 — Finishing a count

Step 18 — Work the second counts

Dashboard → Second counts.

A second count is a bin somebody has to walk back to. They are raised automatically when a line disagrees with the inventory report (subject to your thresholds), or by a supervisor.

- **Raise from all variances now** goes through everything that currently disagrees and raises the tasks. It deliberately leaves alone pallets in aisles nobody has counted yet — mid-count those are not missing, just not reached — and tells you how many it skipped and why.
- The tasks appear on the handhelds: a team taps **Start second counts** on the assignment screen, counts the bin again, and presses **Bin done — nothing more here**. The list is **nearest first**: the aisle the team is in, then its racking block, then the aisles nearest by number, so a team finishing F11 is not sent to F01.
- A second count that agrees with the first settles the line.

Work these down before you close the count. A count closed with open second counts is a count with known-wrong numbers in it.

Second counts

19 open · 0 done

A second count is a bin somebody goes back to. They are raised automatically when a first count disagrees with the inventory report (quantity differs, wrong bin, not on the report, counted twice), when an aisle is handed back with expected pallets nobody saw, or by hand here. The counter is told the bin and the reason type, never the numbers, and the team that did the first count is never offered the second. Lines from a second count replace the first for that bin.

BIN

F03B012

or

PALLET ID

PLT03012B

NOTE

why

TEAM (OPTIONAL)

any

Request second count

Raise from all variances now

Export CSV

BIN	PALLET	REASON	DETAIL	SOURCE	1ST TEAM	TEAM	STATUS	1ST COUNT	2ND COUNT
F01A005	F01-008	QTY VARIANCE	expected 40, first count 26	auto	1	any	open	F01-008 ×26.0	done ×
F01A021	F01-024	QTY VARIANCE	expected 32, first count 41	auto	1	any	open	F01-022 ×58.0, F01-023 ×25.0, F01-024 ×41.0	done ×
F01C107	F01-053	WRONG BIN	expected in F01A041, found in F01C107	auto	1	any	open	F01-053 ×35.0, EMPTY ×0.0	done ×
F02A005	F02-008	QTY VARIANCE	expected 40, first count 26	auto	1	any	open	F02-008 ×26.0	done ×
F02A021	F02-024	QTY VARIANCE	expected 32, first count 41	auto	1	any	open	F02-022 ×58.0, F02-023 ×25.0, F02-024 ×41.0	done ×
F02D031	F02-052	WRONG BIN	expected in F02A040, found in F02D031	auto	1	any	open	F02-052 ×28.0	done ×

Dashboard → Second counts. The counter is told the bin and the reason type, never the numbers — and never the team that counted it first.

Step 19 — Read the reports

Dashboard → Reports.

Fix list — what the floor found that somebody has to put right, on one list: **labels that would not scan** (pallet or rack — rack first, every counter after walks up to that bin), **damage** reported from the gun's *Report a problem* button (a pallet, the racking, the product, each with a reason and a note), and **bins blocked** by a trailer or a forklift that a team said it would come back to. Each shows the bin, the pallet, who saw it and when. **Fixed** ticks it off with a word on what was done; *Still open* is the walk-round list. It downloads as a CSV and has its own sheet in the export.

Export everything (Excel) — one workbook with every table the app keeps for this count, in a form a person can read: a **Summary**, every **count line**, the **pallet** report, the **adjustments** (positive and negative), the **bins** and the ones **not counted**, the **teams** and their times, **sign-ons**, **SOS**, **stopped scanning**, **second counts** and the **log**. Headings are plain words, flags are *Yes / No*, and times are on the warehouse's clock. It is the file for an auditor, a manager or the shared drive. (The CSV buttons beside it are for machines — the ERP, a reconciliation sheet.)

- **Pallet report** — one row per pallet: expected vs counted, which bin the ERP expected and where it was actually found, and a status you can act on: **MATCH**, **QTY VARIANCE**, **WRONG BIN**, **MISSING**, **NOT IN MASTER**, **COUNTED TWICE**. Lot and expiry get their own columns, because the right count of the wrong lot is still wrong. **Only exceptions** narrows it to what needs attention — including a wrong lot or a date about to run out, even when the quantity is right.

Pallet report

☒ Hide matching pallets
 ☐ Hide missing
 Status Any
☐ Lot / date problems only
 System Every system
 Aisle / bin F01 or F01A001
 Team e.g. 4

Find
 Show 50 rows
 [Clear filters](#)
[Export everything \(Excel\)](#)
[Pallet report CSV](#)
[Raw counts CSV](#)
[Exceptions CSV](#)

Uncounted bins CSV

PALLET	SYSTEM	SKU	DESCRIPTION	EXPECTED	1ST COUNT	COUNTED	EXPECTED BIN	FOUND IN	LOT	EXPIRY	TEAM	COMMENTS	STAT
F01-008	ERP	SKU-6610	Salmon fillet skin-on 10lb	40		26	F01A005	F01A005	L2026152	2027-02-09	1		QTY
F01-011	WMS	SKU-3350	Hash brown patty 240ct	61		61	F01A008	F01A008	L2026191	2026-10-16 soon	1		MAI
F01-017	ERP	SKU-4120	Chicken breast IQF 40lb	63		63	F01A011	F01A011	L2026230	2026-09-14 expired	1		MAI
F01-022	WMS	SKU-6610	Salmon fillet skin-on 10lb	58		58	F01A021	F01A021	L2026282	2026-10-16 soon	1		MAI
F01-024	WMS	SKU-3310	Fries shoestring 6x5lb	32		41	F01A021	F01A021	L2026282	2027-02-25	1		QTY

Showing 50 of 1233 that match — set Show to All, or export the CSV for the full list. · 2,659 on the report in all

The pallet report with **Hide matching pallets** ticked: a short pallet, an expired date, one expiring soon. This is the list to work down.

The filter row reads the report without exporting it: **Hide missing** drops the pallets nobody has found or counted yet, **Status** picks one kind of difference, **Lot / date problems only** keeps the wrong-lot and out-of-date rows, **System** one of the site's systems, and **Aisle / bin**, **Team** and **Find** narrow by place, crew, pallet, SKU or description. The line under the table says how many rows match out of the whole report; **Clear filters** is back to the usual view.

- **Find a lot** — after a recall notice: type part of a lot code and get every case of it, both where it was actually counted and where the report expected it, so a pallet nobody found still shows up.

Find a lot after a recall notice: where is every case of it

Searches what was actually counted, and what the inventory report expected — so it answers from the floor, not from what the ERP believed before the count started. Needs the lot code question turned on, or a report that carries lot codes.

LOT OR BATCH CODE

L2026139 Find it

15 counted, 18 on the report
Counted rows are where it actually is now.

PALLET	LOT	EXPIRY	QTY	BIN	aisle	ITEM	TEAM	STATE
F01-005	L2026139	2027-02-06	59	F01A004	F01	SKU-2240 — Sweetcorn supersweet 20lb	1	done counted
F01-006	L2026139	2027-02-07	26	F01A004	F01	SKU-6610 — Salmon fillet skin-on 10lb	1	done counted
F01-007	L2026139	2027-02-08	33	F01A004	F01	SKU-6640 — Cod loin 8lb	1	done counted
F02-005	L2026139	2027-02-06	59	F02A004	F02	SKU-2240 — Sweetcorn supersweet 20lb	1	done counted
F02-006	L2026139	2027-02-07	26	F02A004	F02	SKU-6610 — Salmon fillet skin-on 10lb	1	done counted
F02-007	L2026139	2027-02-08	33	F02A004	F02	SKU-6640 — Cod loin 8lb	1	done counted

A recall: five cases of the lot found on the floor, and a sixth the report still expects in an aisle nobody has reached.

Fix list nothing reported — a clean walk

A count walks every bin in the building. What the counters see on the way is written down here instead of lost on the radio: **labels that would not scan** (pallet or rack — rack ones first, every counter after walks up to that bin too), **damage** reported from the gun (a pallet, the racking, the product), and **bins blocked** by a trailer or a forklift that a team said it would come back to. Tick each one off as it is dealt with.

0
LABELS TO REPLACE

0
DAMAGE

0
BLOCKED BINS TO GO BACK TO

0
OTHER

0
FIXED

All Still open Fixed

Fix list CSV Labels only (CSV)

KIND	BIN	aisle	PALLET	PROBLEM	REPORTED BY	WHEN	STATE
Nothing open — every label scanned, nothing reported.							

The fix list: labels that would not scan, damage and blocked bins from the gun, each with the bin, the pallet and who saw it. Fixed ticks it off.

Step 20 — Approve the adjustments

Dashboard → Adjustments. Only on counts with **Adjustments need approval** turned on (step 13). With it off this tab says so, and every difference goes into the ERP file as it always did.

A variance is not an adjustment until somebody owns it. This is where that happens.

1. The list is every pallet that differs from the report, biggest first: what the system says, what was counted, and what the ERP would move.
2. Tick the ones you have satisfied yourself about. **Select all shown** takes the screenful.

3. Pick a **reason** — your site's list, set in Settings → ERP & backups → Adjustment reasons — and add a note if it helps.
4. **Approve selected**, or **Reject selected** if the count is wrong and the system should keep its number.

What the feature is actually for:

- **Nothing unsigned reaches the ERP.** The Adjustments export holds back anything still waiting, and the preview says how many it left out.
- **Anything under the threshold goes through unsigned.** A two-case difference on a pallet of 600 is noise; a count where every line needs a signature gets rubber-stamped, not read.
- **Counted again means signed again.** If a second count changes a pallet after it was approved, it comes back to this list with the approval cleared — the number somebody signed for is no longer the number.
- **A variance a second count clears disappears.** There is nothing left to adjust.
- **It is all in the log:** who approved what, with which reason, and when. That is the answer to "who authorised writing off 400 cases of chicken".

A pallet nobody has reached yet is not on this list while the count is running. Once the count is **closed**, a pallet the report expected and nobody found becomes an adjustment like any other.

Adjustments

what this count would do to the ERP

Every pallet that differs from the inventory report, biggest first. Approve one with a reason code and it goes into the ERP file; reject it and the system keeps its number. Nothing leaves in the Adjustments export until it has been signed for — and a line counted again after it was approved comes back here, because the number somebody signed for is no longer the number.

10
WAITING FOR APPROVAL

1
APPROVED

0
REJECTED — THE SYSTEM KEEPS ITS NUMBER

0
UNDER THE THRESHOLD

115
UNITS STILL UNSIGNED

REASON

NOTE (OPTIONAL)

Choose a reason...

Free text — kept with the approval

Approve selected

Reject selected

Adjustments CSV

☒ Only the ones still waiting
 System
 Every system
 Select all shown
 Select none

	PALLET	SYSTEM	ITEM	BIN	FOUND	REPORT QTY	COUNTED	ADJUSTMENT	STATUS	REASON	SIGNED BY
☐	F01-008	ERP	SKU-6610	F01A005	QTY VARIANCE	40	26	-14	PENDING	—	—
☐	F02-008	ERP	SKU-6610	F02A005	QTY VARIANCE	40	26	-14	PENDING	—	—
☐	F03-008	ERP	SKU-6610	F03A005	QTY VARIANCE	40	26	-14	PENDING	—	—
☐	F04-008	ERP	SKU-6610	F04A005	QTY VARIANCE	40	26	-14	PENDING	—	—
☐	F05-008	ERP	SKU-6610	F05A005	QTY VARIANCE	40	26	-14	PENDING	—	—
☐	F01-024	WMS	SKU-3310	F01A021	QTY VARIANCE	32	41	+9	PENDING	—	—
☐	F02-024	WMS	SKU-3310	F02A021	QTY VARIANCE	32	41	+9	PENDING	—	—
☐	F03-025	WMS	SKU-6640	F03A022	QTY VARIANCE	39	48	+9	PENDING	—	—

10 shown of 11 · anything under 5 units and 5% goes through unsigned

The adjustments waiting for a signature, biggest first. AUTO is under the threshold and goes through without anybody being asked; APPROVED carries the reason and the name.

Step 21 — Send it to the ERP

Settings → ERP & backups → Send to the ERP.

1. Choose the **layout** that matches your ERP. Column names and which rows are included are configuration — add a layout rather than editing the file by hand afterwards. Where three systems share the warehouse, pick the **System** too: one file per system, named for it, with only that system's pallets in it. (Each system's report is named when it is uploaded — Settings → Lists & racking → Inventory report → **System** — or carries a *System* column; the pallet report, adjustments and Export everything show it, and the scanners never do.)
2. **Preview** and read the first rows. On a count with approvals on, the preview says how many adjustments it left out because nobody has signed for them yet.
3. **Download CSV** and import it into the ERP.

The **Adjustments** layout carries the reason code and the name of whoever approved it, so the file the ERP gets is the same story the log tells.

Settings → ERP & backups. Preview before you download; the layout decides the column names and which rows are included.

Step 22 — Close the count

Settings → Getting started → Count session → Close session. A closed count is read-only: scanners can no longer post lines to it, and its reports stay available for ever.

Delete... is separate and deliberately harder: the count must be closed first, you have to type its name, and a backup is taken before anything is removed. Everything counted against it goes with it. Close counts; delete only the ones created by mistake.

Step 23 — Backups and the log

Settings → ERP & backups → Backups & log.

- **Back up now** before and after anything large — an ERP import, a bulk re-upload, a deletion. The app also backs itself up daily and keeps the last 14.
- **The log** records every supervisor action: who signed in, who uploaded what, who overrode what, who raised second counts, who searched for a lot. **Export the log** for an auditor.

Backups & log

Back up now

Export the log

1 kept (newest 10/4/2026, 6:38:46 PM), one a day, 14 retained

BACKUP	SIZE	TAKEN		WHEN	WHO	DID WHAT
inventory-2026-10-04-18-38-46-daily.db	288 KB	10/4/2026, 6:38:46 PM	Download	10/4/2026, 6:38:49 PM	Dana Whitfield	signed in
				10/4/2026, 6:38:48 PM	Dana Whitfield	generated a cycle batch
				10/4/2026, 6:38:48 PM	Dana Whitfield	uploaded pallets
				10/4/2026, 6:38:48 PM	Dana Whitfield	uploaded bins
				10/4/2026, 6:38:47 PM	Dana Whitfield	created session
				10/4/2026, 6:38:47 PM	Dana Whitfield	created session
				10/4/2026, 6:38:47 PM	Dana Whitfield	put a note on the board

Backups on the left, the log on the right. Both export.

Part 6 — The cycle-count programme

A cycle count is the same app with a different rhythm: instead of stopping the warehouse, a handful of bins are counted every day.

1. **Create one count session of type "Cycle count"** and keep using it. It runs for the year — do not create a new one each week, or you lose the history of when each bin was last counted.
2. Upload the bin list and the inventory report. If your ERP export has a *last physical inventory date* column it is read automatically, and the programme picks up where the ERP left off.
3. Go to `/cycle` → **Today's bins**. Choose:
 - **how many bins** in the batch,
 - **which bins**: *longest since it was counted, never counted, or a random sample*,
 - optionally a **zone, aisle or levels** to stay inside.
 - optionally only **front** or only **back** bins (*Face*).
4. **Preview**, then **Generate**. The bins appear on the handhelds as tasks.

The screenshot shows the 'Cycle counts' interface. The sidebar on the left has a search bar and a list of navigation items: 'Full Harvest Inventory', 'COUNTING' (with sub-items 'Dashboard', 'Cycle counts', 'Today', 'Still open', 'Coverage', 'Program & data'), 'WAREHOUSE JOBS' (with sub-items 'Front bins', 'Not in Location'), 'THE SITE' (with sub-items 'Teams & crew', 'Settings'), 'LEARN' (with sub-items 'Testing Suite', 'User guide'), and user controls at the bottom ('Dana Whitfield · admin', 'Change my password', 'Log out'). The main content area is titled 'Cycle counts' with a subtitle 'America/New_York · 2026-10-04'. It has tabs for 'Today', 'Still open', 'Coverage', and 'Program & data'. The 'Today' tab is active, showing 'Today's bins'. A text box explains: 'Bins are picked by how long they have gone without a count — seeded from the Last Phys. Invt. Date in your export and moved forward as counts land, so a batch never re-picks what was counted yesterday.' Below this is a table with columns: BINS, PICK, ZONE, AISLES, LEVELS, FACE, and FOR. The 'BINS' column has a value of '40'. The 'PICK' column has a dropdown menu with 'Longest since counted' selected. The 'ZONE' column has a value of 'any'. The 'AISLES' column has a value of 'any'. The 'LEVELS' column has a value of 'any'. The 'FACE' column has a dropdown menu with 'Front and back' selected. The 'FOR' column has a value of 'anyone'. There are 'Preview' and 'Generate' buttons. Below the table, there are settings for 'Generate automatically' (checked), 'Weekday' (selected), '40' (bins each time), '6' (from site time), and 'Monday' (on weekly). A 'Save schedule' button is also present.

`/cycle` → *Today's bins: how many, which ones, and optionally the zone or aisles to stay inside.*

Front-placed bins. The **Front bins** tab lists the bins on the aisle face of the racking — narrow it by zone, aisle or level — to look at, **download**, or send to the scanners in one go with **Count these — make a batch**. Which face a bin is on comes from the bin list's own description (... *Position # 001 - Front*), or, where the list does not say, from the site drawing (odd positions front, even back).

1. Counters pick **Cycle count** at sign-on. A cycle count is one person with a gun, so the gun asks for **their clock-in number only — no team**. Several people can be on the same programme at once: each signs on as themselves and takes their own bins; a bin one person has taken is not offered to the next. The dashboard shows each by clock-in number and name. They then work the list. Each bin is counted as it stands — it is *the* count for that bin, not a second opinion.
2. **Coverage** shows how much of the warehouse has been counted in the period, and what has not been touched. Export it for the auditors.
3. A **schedule** generates the batch automatically each day or week so nobody has to remember.

The batches that have been generated, and the programme's own bin list and inventory report.

Part 7 — When something goes wrong

WHAT YOU SEE	WHAT IT MEANS	WHAT TO DO
Gun: <i>"this scanner is no longer authorised"</i>	Its link was reset or the scanner was removed	Settings → Scanner screen → Reset link , open the new link on the device
Gun: <i>"Offline and no list cached for this session"</i>	The handheld has never downloaded this count	Carry it into Wi-Fi once and sign on again
Gun says OFFLINE with lines queued	Normal in a dead spot	Nothing. They upload when it gets a signal. Do not wipe the device
A scan does nothing	DataWedge is not sending a suffix	DataWedge → Basic data formatting → send ENTER (or TAB)
A keypad covers the screen	Somebody left the Keyboard button on	Tap Keyboard again. It is off by default and never comes up by itself
The Adjustments tab is empty	Approvals are off for this count, or nothing differs from the report yet	Turn on Adjustments need approval under Count session. A pallet nobody has counted yet is not an adjustment until the count is closed
The ERP file is shorter than the variance list	Adjustments are waiting for approval and are held back deliberately	Work the Adjustments tab, then export again. The preview says how many were left out
A pallet is on the report as NOT IN MASTER with a name like NO-LABEL-F01A001-1	Its label would not scan and nothing on it was readable, so it was counted under the bin's name	Send somebody to relabel it — Reports → Labels to replace has the list
A line is in a bin called NO-LABEL-BIN-F01-1	The rack label would not scan, and the app had nothing to suggest — an unguided count, with the pallet not on the report either	The quantity is safe. Relabel the bay, then correct the bin on the line if it matters; the relabel list says which aisle it was in
The note is not on the board	The board polls every 15 seconds by default, or the note is on a different count	Wait a few seconds; check the board is pinned to the same count (<code>/board?session=12</code>)

WHAT YOU SEE	WHAT IT MEANS	WHAT TO DO
A change you made does not appear on the scanners	The gun is still running the app it loaded before the change	Site settings (questions, reasons, text size) reach a running gun within about half a minute and need nothing. A new version of the app needs the page to reload: with Update itself after a deploy on it does that by itself between pallets, within a couple of minutes of somebody picking the gun up. To force it: tap the green Update ready bar, or close the app fully (not just the home button) and reopen it. Reinstalling is never necessary
An SOS did not reach Teams	The channel address is wrong, expired, or Teams was down	The alert is still on the dashboard — the row says what Teams answered. Settings → Advanced → Send a test card to check the address. Microsoft is retiring the old <i>Incoming Webhook</i> connectors; if yours was one, make a Workflows one instead
A counter says they pressed SOS and nothing happened	The gun had no signal	The gun tells them: <i>"No signal — this has NOT been sent."</i> It sends itself the moment there is signal. In a dead zone, walking ten metres usually fixes it
The printed barcodes will not scan	The page was printed "fit to page", or on glossy paper	Print again at 100% on plain white paper. If a gun still refuses them, print with Per row: 1 — the bars are wider on a bigger label
A code in the spreadsheet will not print	Code 128 carries plain ASCII only — an accented letter or a smart quote cannot be drawn	The book says which character it was; retype that code with plain letters and numbers
The app still shows the old name somewhere	The name was changed under Settings → Advanced → Site name	Supervisor pages change at once. A scanner picks it up when it is next online; the board on its next refresh. The name under a home-screen icon comes from the app's install and updates when the app is next reinstalled
The site's address opens the supervisor sign-in, not the scanner	That is how it works: the bare address is the office's	A scanner is opened from its own link under Settings → Scanner screen (<code>/?d=...</code>); after that its home-screen icon lands on the app. If a handheld lost that (site data cleared), open its link again
You do not know what a message means	The gun or the dashboard said something unfamiliar	Paste it into User guide → Ask the guide : it knows every message the gun and the server can show, with the fix. A new starter should begin at the guide's <i>Your first day</i>

WHAT YOU SEE	WHAT IT MEANS	WHAT TO DO
You cannot find where something is set	The app has four pages and twenty-odd cards	Type what you would call it into the search box at the top of the sidebar — <i>"upload bin list"</i> , <i>"keyboard"</i> , <i>"approve"</i> — and the Go to hits take you straight there. / puts the cursor in it
Not sure whether a gun has the latest version	—	The sign-on screen's bottom line reads <i>"App build a1b2c3d4e5f6 on the server — this scanner is up to date"</i> . Compare it across two guns, or against a fresh reload
A gun keeps saying "update did not take"	It reloaded and is still on the old version — something between it and the server is serving stale files	Close the app fully and reopen it. If it persists, clear the site data for the app on that device (Android → Settings → Apps → the app → Storage), then open its link again
The screen keeps rotating, or reads upside down	Auto-rotate is on, and a browser tab is never allowed to lock the orientation	The app turns itself back upright on its own, sideways or end over end. If it is not, check Keep it upright is ticked under Settings → Scanner screen, then read the grey line at the bottom of the sign-on screen — it says the screen size the handheld gave the app, how far the device says it has turned, and what the app did about it. To stop the device turning at all, install the app (it asks for one way up) or turn auto-rotate off on the handheld
A team says they never got a message	Look at Read by on the dashboard	It shows which scanners have tapped Got it. A scanner that is offline gets it on its next sync
A scan seems to land on a button instead of the box	Something else took the focus	Nothing — the app puts the keystrokes in the box and carries on. Tell us if it still happens
The guide is a bin or two ahead of the team	The bins hold several pallets each	Fixed: the guide now stays on a bin until its tags are counted. Check Show the next bin in the aisle is on
A scan opens the address bar and the text goes into it	The page has lost the keyboard — either the scanner sends a TAB that used to move focus out of the page, or somebody tapped the browser's own bar	Fixed: TAB now ends a scan like ENTER and the focus never leaves the box. If it ever happens again the app shows a red Tap here to scan bar — one tap puts it right

WHAT YOU SEE	WHAT IT MEANS	WHAT TO DO
A bar with the web address appears on every scan	The app is being run as a page in Chrome rather than installed	Install it: Chrome menu → Install app , or the Install on this scanner button on the sign-on screen, then open it from the home-screen icon
The browser's address bar is in the way	Same thing — the app is not installed	As above. For a device that should run nothing else, use Zebra's Enterprise Home Screen
Gun: <i>"Team N is counting aisle X"</i>	Another team holds that racking block	Wait, or hand the other aisle back first
Second-count list is enormous	Thresholds are at 0	Set Recount over and or over % , and a cap (Part 3, step 13)
The map is a schematic, not your drawing	No rack drawing on this count	Settings → Getting started → Count session → Map drawing
A reason code edit "did not reach" a gun	It takes up to about half a minute, and only lands between pallets	Wait for the counter to finish the pallet they are on
Can nobody sign in?	All logins lost	The superadmin is made from the Railway variables the first time the app starts; if it was deleted or demoted later, set <code>SUPERADMIN_USER</code> to a new username and restart, which makes a fresh admin login
Numbers look wrong after an ERP import	The inventory report moved on	Re-upload it with Replace what is there , then re-read the pallet report
A scanner's scan times are hours out	The handheld's clock is wrong	Nothing to do: every line carries the gun's own send time, and the server corrects the scan time by the clock's error. Set the clock when you can, all the same
Everyone was signed out of the dashboards	The server restarted (a deploy, a Railway restart)	Sign-ins now survive a restart; if it still happens, the server lost its database volume — check Railway

Part 8 — Capacity: what the system will take

Two measurements, both against a count bigger than the warehouse.

A whole count, played end to end. Twenty teams with two scanners each counted 20,000 bins over three shifts, with the three shifts compressed into 6.0 hours of real time (`node tools/sim-floor.mjs`): the sign-on rush at six, the breaks, a lunch that trips the stopped-scanning alert, SOS calls, second counts raised behind the variances, and a supervisor approving adjustments over the top of it all. Every ten minutes the dashboard and the office board were photographed; `docs/load-test/index.html` is the result, to scrub through.

Bins counted	20,000 of 20,000, 22,655 count lines, 0 failed requests out of 27,059
Nothing lost, nothing doubled	0 pallets counted twice; every aisle job handed back (71)
A scan, with the whole floor working	9 ms typical, 747 ms at the 95th percentile
A dashboard refresh over the top of it	279 ms typical, 1595 ms at the 95th percentile
The office board	350 ms typical, 1468 ms at the 95th percentile
Forty scanners pulling the whole list at once	11 ms typical, 2574 ms worst
The office: approvals, SOS, messages	296 approved, 62 rejected, 25 SOS raised and 25 closed, 657 second counts walked

The same floor at full tilt. The rehearsal of that run plays the three shifts in eighteen minutes — twenty-eight times real speed, every scanner posting a line every second or two — and the server still answered: 20,000 bins in, a count line at 8 ms typical and 536 ms at the 95th percentile, dashboards at 150 ms typical. (`node tests/run-all.mjs load-15-teams` keeps the older fifteen-team burst test in the suite: thirty scanners posting flat out, nothing lost, nothing doubled, the racking-block rule honoured.)

What the simulation found and fixed. On a count this size the pallet report took six seconds to build, and the adjustments list, its summary and *Export everything* twelve to eighteen; the server answers one request at a time, so while it built them nothing else moved. It is now five indexed passes joined in memory: the report in about a tenth of a second, the export in under one.

The constraints that matter in practice are warehouse Wi-Fi coverage and battery life, not the server. Real counters scan a pallet every ten to twenty seconds; the whole floor at that pace is a small fraction of what the rehearsal threw at it.

Appendix A — File column reference

Files may be CSV, TSV or Excel (.xlsx/.xlsm). Column names are matched loosely — case, spaces and punctuation are ignored — so most ERP exports load unchanged. Each upload card shows exactly which columns it recognised.

Bin list — the only required column is the location.

WHAT	ACCEPTED COLUMN NAMES
Bin (required)	location, loc, bin, bin location, location code, slot, code, warehouse location
Aisle	aisle, row, aisle no, aisle number — <i>derived from the bin code if absent</i>
Zone	zone, area, section, region, warehouse
Level	level, levels, tier, shelf — <i>derived from the bin code if absent</i>
Description	description, desc, name
Last counted	last phys invt date, last counted, last count date, last inventory date

Inventory report — upload it exactly as the site's systems export it. The columns are:

COLUMN	WHAT IT IS	REQUIRED
Bin Code	the position (F18D064); lower case is fine	yes
Container No.	the pallet's number as printed on its label (FR12345678, F61409-006, 4748025); a leading \$ from the ERP is dropped	yes
Item No.	the item	
Description	the item's description	
Variant Code	DIST, REWORK, DONATE, ALLERGEN, DESTROY, REJECTED, RND — kept on the pallet and in the exports	
Quantity	the system's quantity; zero and negative quantities are kept as the report says, and counted in the upload summary	
Unit of Measure Code	CS, CS30LB, C10KG, CASE, BAG, BOX ...	
Entry No.	the ERP's item ledger entry number, carried through to the pallet report and the ERP file so adjustments post against the right entry	

COLUMN	WHAT IT IS	REQUIRED
Lot No.	the lot (F61409, 50479-1, PO123456)	
System	which system the pallet belongs to (JustFood, SGI, NTFF); OPEN with no container is an empty position	

Other names for these columns are understood too (pallet id, LPN, item, SKU, qty, location, bin, lot code, unit, source ...), as is a **Best Before** or **Expiry** column when the file has one.

Three things in a real export, and what the upload does with them:

- **Empty positions.** A row with a bin and no container (System **OPEN**) is a position the count expects to find empty. It is not a pallet; the summary says how many there were.
- **A container on two rows.** In the same bin it is two ledger entries for one pallet (a –134 and a +180 are a pallet of 46): the quantities are added up. In two different bins the first row stands and the summary lists the rest, with both bins, so somebody can look. Nothing is overwritten quietly.
- **Odd quantities.** Zero and negative quantities are kept exactly as the report has them, and the summary counts them.

Barcode test book — one row per practice line.

WHAT	ACCEPTED COLUMN NAMES
Bin	bin, bin location, location, loc
Pallet	pallet, pallet id, tag, LPN
Qty	qty, quantity, count, cases, units
Note	note, notes, label, description

A row needs a bin or a pallet; everything else is optional. Sheets made with the first version of the template (Type / Code) are still read.

Counting plan — one row per aisle, in the order the team counts it.

WHAT	ACCEPTED COLUMN NAMES
Team	team, team number, crew, group
Aisle	aisle, row, aisle no
Levels	level, levels, tier, shelf — e.g. A-C , D-F , A-F

Dates are read in either order — 2027-03-15 and 03/15/2027 both work.

Appendix B — Server settings reference

SETTING	DEFAULT	WHAT IT DOES
<code>SUPERADMIN_PASSWORD</code>	—	The superadmin's password. Set it
<code>SHARED_PASSWORD_LOGIN</code>	<code>on</code>	<code>off</code> requires named logins — ignored if no admin account exists, so it cannot lock you out
<code>SUPERADMIN_USER</code>	—	Username of the permanent admin, created at start-up
<code>SUPERADMIN_NAME</code>	—	That person's name, as it appears in the log
<code>SUPERADMIN_PASSWORD</code>	falls back to <code>ADMIN_PASSWORD</code>	Must be 8+ characters and not <code>changeme</code>
<code>SCANNER_AUTH</code>	<code>on</code>	<code>off</code> lets anything on the network post counts. Leave it on
<code>DB_PATH</code>	<code>data/inventory.db</code>	Put this on a persistent volume
<code>BACKUP_DIR</code>	<code>data/backups</code>	Where the daily backups go
<code>BACKUP_KEEP</code>	14	How many backups to keep
<code>SITE_TIMEZONE</code>	<code>America/New_York</code>	Dates on reports and cycle-count due dates
<code>PORT</code> / <code>HOST</code>	3000 / 0.0.0.0	Where the server listens
<code>MAX_UPLOAD_MB</code>	64	Largest file an upload will accept