



Oskar

User Manual — Engineering Change Notes

DRAFT

Version 1.0 · 25 August 2026

Scanfil APAC

Replaces Stargile for ECN management

About this manual

This is a draft. It has not been formally approved, and has not yet been trialled with users. Treat the content as accurate but provisional, and send corrections to the Lead Engineer, Development & Integration before it is issued.

Version	1.0
Status	Draft
Issued	25 August 2026
Owner	Lead Engineer, Development & Integration
Applies to	Oskar as at August 2026
Source revision	da4f712 (modified)

Revision history

Version	Date	Change
1.0	August 2026	First issue. Covers ECN creation, approval, the DC gate, BOM tools, bulk uploads and onboarding. Includes BOM-only ECNs (ADR-014).

What Oskar does

Oskar is the system Scanfil APAC uses to raise, review and approve **Engineering Change Notices** (ECNs), and to push approved changes into Movex. It replaces **Stargile**.

Movex remains the single source of truth for items, BOMs and routings. Oskar governs how changes get into it.

You do not need to read all of this

If you...	Read	Roughly
Raise changes engineer, designer, originator	1, 2, 3, 7, 9, 10 — plus 6 if you work with BOMs	Two hours, plus hands-on
Approve changes EM, QM, PM, Supply Chain, Finance	1, 2, 4, 8, 10	Thirty minutes
Are a Document Controller	Everything, in order — the DC is the only role that touches every part	Half a day
Are a Senior or Chief Engineer	1, 2, 4 (Engineering Review section), 6	An hour
Came from Stargile	Start at 11 — what moved, what's gone, which habits to unlearn	Twenty minutes
Cannot sign in	12	Five minutes

Getting help

Problem	Who
Can't sign in, or no buttons appear where you expect them	IT
An ECN is stuck, or a Movex write failed	Your Document Controller
Not sure whether something needs an ECN at all	Your Engineering Manager
Something in this manual is wrong or unclear	The Lead Engineer, Development & Integration — please say so, it will be fixed

Screens change. If what you see differs from what is written here, trust the screen and report the difference.

Example spreadsheets

Ready-to-use templates for all four bulk uploads ship alongside this manual in the `templates/` folder: item, routing, BOM change and MPN.

Contents

Getting started	7
Signing in	7
Your worklist	7
Opening an ECN	9
What you can do depends on three things	11
Where to go next	11
Glossary and reference	12
ECN statuses	12
Roles	12
Change scope	13
Facilities	14
Terms	15
Acronyms you may meet	16
Raising an ECN	17
Before you start	17
Step 1 — Create the ECN	17
Step 2 — Add the content	20
Step 3 — Submit	22
What happens next	22
If your ECN is rejected	22
Cancelling	23
Common mistakes	23
Approving an ECN	24
Finding what needs you	24
Why you were asked	24
Management Review happens in parallel	24
Reviewing the change	26
Approving	26
You cannot approve your own ECN	26

Engineering Review — for Senior and Chief Engineers	27
The Cost Accountant is different	27
After you approve	27
If you cannot see an Approve button	29
The Document Controller	30
Your two group memberships	30
The DC gate	30
What happens after you approve	32
Closing the ECN	32
Putting an ECN on hold	32
Recovering a failed write	32
Reassigning roles	34
The audit trail	34
Your daily summary	34
Things only you can do	35
Admin	35
ECN Role Assignments	36
Movex Write Recovery	36
Customer — SE / PM Defaults	36
Active Directory Groups	36
A note on what admin cannot do	38
BOM tools	39
BOM Browser	39
BOM Compare	39
MPN Search	39
When to use which	44
These tools are read-only	44
Bulk uploads	45
How an upload works	46
⚠ Export is not a template	
Items	47


Routing	48
BOM changes	49
MPNs	50
When an upload is rejected	50
Notifications	52
When you get an email	52
The overdue chase	52
The daily summary	53
What Oskar does not email you about	53
🚨 If you are not getting emails	
A caution about filtering	53
Finding ECNs	54
Start with the cards	56
Then narrow it down	56
Sorting	57
Reading the table	57
Finding a change after it is finished	57
Exporting	58
When things go wrong	59
I can't sign in	59
I'm signed in, but I can't see anything / can't do anything	59
There's no Approve button	59
I got an email but there's nothing to do	60
I'm not getting emails at all	60
My upload was rejected	60
I can't edit my ECN any more	61
My ECN is stuck at "Approved"	61
My ECN is stuck at "Movex Updated"	62
The BOM Browser says "No BOM found"	62
"Where used" is empty	62
Something changed underneath my ECN	62

Who to ask	63
Coming from Stargile	64
The five differences that matter most	64
Also fixed	65
Terminology	65
What has genuinely gone away	65
What is not in Oskar yet	66
The switchover	66
Where to go next	66
Access and onboarding	66
There is no Oskar password	67
Two things control what you can do	67
The three access groups	68
How you get into a group	68
New starter checklist	68
⚠️ The email address is not optional	
When someone changes role	69
When someone leaves	69
Diagnosing an access problem	70
What Oskar deliberately will not do	70

Getting started

Signing in

Open Oskar in your browser and sign in with your **normal network username and password** — the same ones you use for Windows. There is no separate Oskar password to remember or reset.

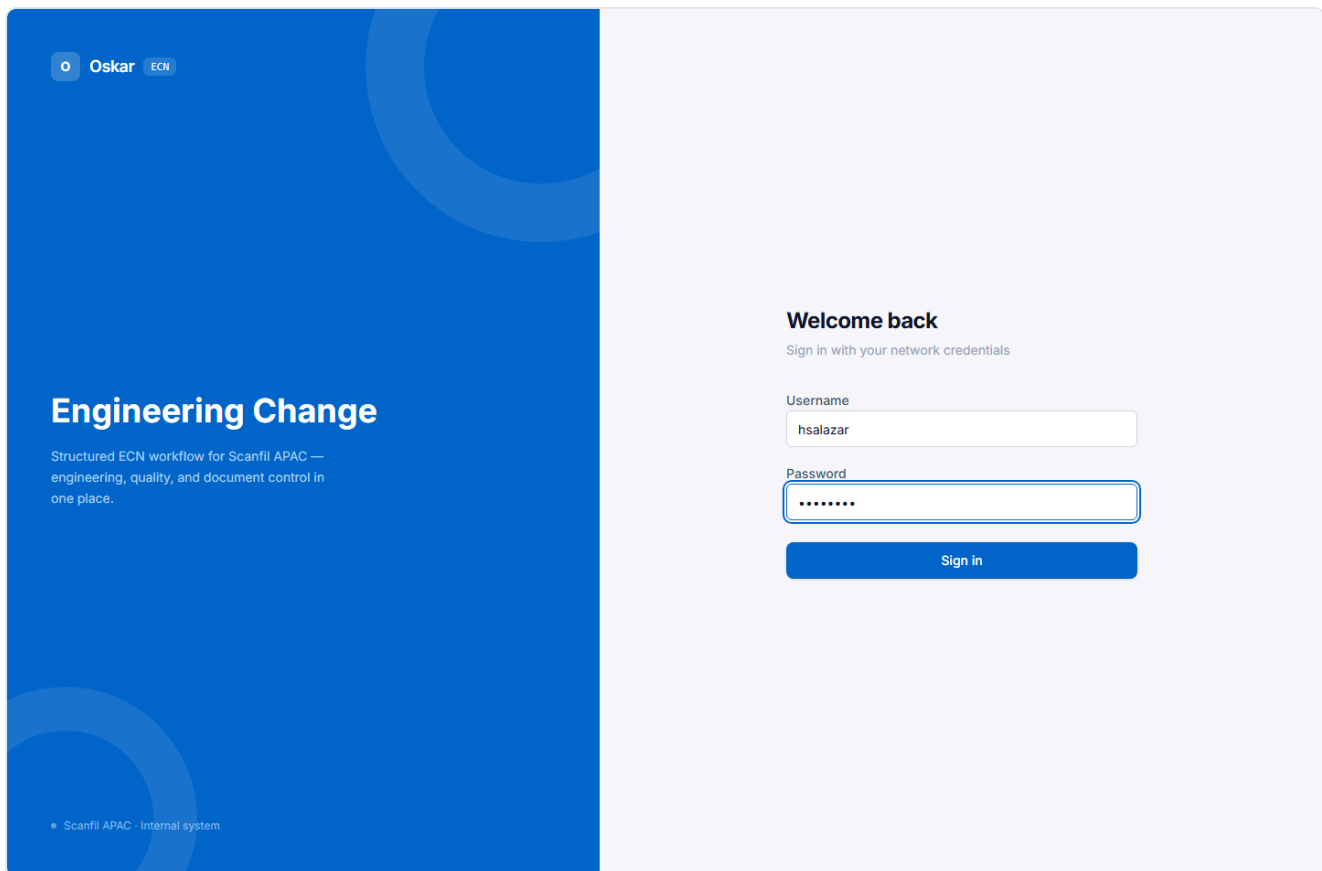

The Oskar sign-in page

If your credentials are rejected, see [When things go wrong](#) — the message "Invalid username or password" does not always mean what it says.

Your worklist

Signing in lands you on the ECN list. This is the screen you will spend most of your time on.

ACTIVE ECNS
18
[Click to filter](#)

REQUIRE MY ACTION
9
[Click to filter](#)

OVERDUE (>7 DAYS)
11
[Click to filter](#)

All statusesAll customersAll originatorsAll next actions27 results

NUMBER	CUSTOMER	TITLE	CUST. ECN	STATUS	ORIGINATOR	NEXT ACTION	ENTRY DATE	AGE
ECN-2026-D-0033		[DEMO] BOM supersession —...		Approved	hsalazar		21 Aug 2026	8d
ECN-2026-D-0032		[DEMO] BOM changes —...		Draft	hsalazar	hsalazar	21 Aug 2026	8d
ECN-2026-D-0031		[DEMO] Phase 1 EOL compone...		Closed	hsalazar		21 Aug 2026	8d
ECN-2026-D-0030		[DEMO] Supplier change — T...		On Hold	hsalazar		21 Aug 2026	8d
ECN-2026-D-0029		[DEMO] Add conformal coatih...		Rejected	hsalazar	hsalazar	21 Aug 2026	8d
ECN-2026-D-0028		[DEMO] BOM rationalisation —...		Moves Updated	hsalazar		21 Aug 2026	8d
ECN-2026-D-0027		[DEMO] Routing change —...		DC Approved	hsalazar		21 Aug 2026	8d
ECN-2026-D-0026		[DEMO] New IC — LM2596...		Mgmt Review	hsalazar	em_user, gm_user, gm_user	21 Aug 2026	8d
ECN-2026-D-0025		[DEMO] Replace connector J4...		Eng Review	hsalazar		21 Aug 2026	8d
ECN-2026-D-0024		[DEMO] SMT line capacitor...		Draft	hsalazar	hsalazar	21 Aug 2026	8d
ECN-2026-D-0023		[BOM] Testing		Draft	hsalazar	hsalazar	11 Aug 2026	19d
ECN-2026-D-0012		Bulk routing/MPN upload test		Draft	hsalazar	hsalazar	16 July 2026	36d
ECN-2026-D-0011		TESTING 140726		Eng Review	hsalazar	eng_user, branko.podak	15 July 2026	37d
ECN-2026-D-0010		S9-S Moves WRITE flow test		Moves Updated	hsalazar	dic_user	14 July 2026	38d
ECN-2026-D-0009		S9-S Moves flow test		Moves Updated	hsalazar	dic_user	14 July 2026	38d
ECN-2026-D-0008		Testing ECN Flow		Draft	hsalazar	hsalazar	14 July 2026	38d
ECN-2026-D-0007		TESTING Routing Panel		Draft	hsalazar	hsalazar	10 July 2026	42d
ECN-2026-D-0006		Add component to BOM		Moves Updated	hsalazar	dic_user	25 June 2026	57d
ECN-2026-D-0005		BOM Update		Cancelled	eng_user		25 June 2026	57d
ECN-2026-D-0004		xxxxxxxxxxxx		Moves Updated	hsalazar	dic_user	23 June 2026	59d
ECN-2026-D-0003		aaaa		Mgmt Review	hsalazar	eng_user	18 June 2026	64d
ECN-2026-D-0002		Facility D verification		Moves Updated	hsalazar	dic_user	16 June 2026	66d
ECN-2026-D-0001		Facility D verification		Approved	hsalazar		16 June 2026	66d
ECN-2026-L-0011		aaaaaaaa		Draft	hsalazar	hsalazar	16 June 2026	66d
ECN-2026-L-0010		E2E test customer field		Draft	hsalazar	hsalazar	16 June 2026	66d
ECN-2026-L-0009		TEST		Eng Review	eng_user	eng_user, eng_user	28 May 2026	85d
ECN-2026-L-0001		Test ECN - Docker local stand...		Approved	hsalazar		19 May 2026	94d

The ECN list, with stat cards, filters and the results table

(Customer names are blurred in this manual, not in the real screen.)

The three cards

The cards across the top are **filters, not just counters**. Click one and the list below narrows to match; click again to clear it.

Card	Shows
Active ECNs	Everything still in progress — excludes Closed and Cancelled
Require my action	ECNs waiting on <i>you</i> , right now. This is the one that matters.
Overdue (>7 days)	Open more than seven days, whoever they're waiting on

If you read nothing else on this screen, read **Require my action**. It answers "what do I need to do today?" without opening a single ECN.

The table

Column	What it tells you
Number	The ECN's reference, e.g. <code>ECN-2026-D-0026</code> . <code>D</code> is Melbourne, <code>L</code> is Johor Bahru.
Customer	Who the change is for, if it's customer-driven
Title	What the change is
Cust. ECN	The customer's own reference, when they have one
Status	Where it is in the workflow — see the Glossary
Originator	Who raised it
Next action	Who it is waiting on. Blank means nobody — it's finished or paused.
Entry date / Age	When it was raised, and how long it's been open. Ages over a week turn red.

Click any column header with an arrow to sort by it. Click an ECN number to open it.

Finding a specific ECN

Four dropdowns sit above the table — status, customer, originator and next action — plus a search box that matches on number and title. They combine, so you can ask for "everything at Management Review waiting on the Quality Manager" in two clicks.

More on this in [Finding ECNs](#).

Opening an ECN

Clicking an ECN opens its detail screen. Every ECN looks the same regardless of status; what changes is which buttons you see.

The screenshot displays the 'Management Review' stage of an ECN workflow. At the top, a header bar shows navigation links for ECNs, the current ECN number (ECN-2026-D-0026), the review stage (Mgmt Review), and the item title ([DEMO] New IC — LM2596 buck converter). A 'Cancel ECN' button is in the top right.

The main content area is titled '[DEMO] New IC — LM2596 buck converter' and includes a description: 'Introducing LM2596 step-down DC/DC converter on PCBA-LF-003 to replace linear regulator LM7805. Reduces heat dissipation by ~60%. New layout required — drawing number to be assigned by DC.' Below this is a table with metadata:

ORIGINATOR	FACILITY	CUSTOMER	REVISION	CREATED	AGE
hsalazar	D	—	Rev 1	21 Aug 2026	0 days

Below the table, there is a 'DMR DOCUMENT' section with a link to 'Add link' and a note 'No document linked'. At the bottom of this section are buttons for 'New Item' and 'Routing change'.

The 'Workflow' section shows a vertical timeline of stages: Draft (Done), Engineering Review (Done), Management Review (current stage, indicated by a blue ring), DC Approval, Approved — Movex Write, Movex Updated, and Closed. The Management Review stage is expanded to show a list of roles and their status:

Role	Manager	Status
ER	Engineering Manager em_user	pending
FR	Finance —	skipped
PR	Production Manager pm_user	pending
QR	Quality Manager qm_user	pending
SC	Supply Chain —	skipped

Below the workflow, there is an 'Actions' section with a 'Reject' button. This is followed by a table of items with tabs for 'Items (1)', 'Routing', 'BOM Changes', and 'MPNs'. The table shows one item: 'LF-IC-0220 IC Buck Conv LM2596 TO-263' with a 'New' tag. Below the table is a 'Notes & Comments' section with a text input field and a 'Post comment' button. At the bottom, there is a 'Revision Lineage' section showing 3 events and a 'Chain verified' status.

An ECN at Management Review

Four things are stacked down the page:

- 1. The header** — title, description, originator, facility, customer, revision and age. The grey pills at the bottom are the **change scope**: what this ECN affects, and therefore who has to approve it.
- 2. Workflow** — the approval timeline. Green ticks are done, the blue ring is where it is now, grey circles are still to come. At Management Review you will see several roles listed together because **they are asked in parallel, not in sequence** — the screenshot above shows Engineering Manager, Production Manager and Quality Manager all **pending** at once, while Finance and Supply Chain are marked **skipped** because this change didn't affect them.

Your action buttons, if you have any, are at the bottom of this panel.

3. The tabs — Items, Routing, BOM Changes and MPNs: the actual content of the change. Each has **Export** ↓ and **Upload** ↑ buttons. See [Bulk uploads](#).

4. Notes & Comments, and Revision Lineage — the discussion thread, and the tamper-evident audit trail of every status change. The "Chain verified" badge means the audit record is intact.

What you can do depends on three things

If a button you expect isn't there, it is almost always one of these:

- **The ECN's status.** You cannot edit items on an ECN that has already been approved.
- **Your role on *this* ECN.** Being a Quality Manager doesn't mean you're the QM on every ECN — role assignment is per ECN and per plant.
- **Your access groups.** Set by IT, separately from the above. See [Access and onboarding](#).

Oskar hides actions you cannot take rather than showing them greyed out, so an empty Actions row means there is genuinely nothing for you to do right now.

Where to go next

You are	Read
Raising changes	Raising an ECN
Reviewing and approving	Approving an ECN
A Document Controller	The Document Controller
Coming from Stargile	Coming from Stargile

Glossary and reference

Everything in this chapter is a lookup. Read it once to get oriented, then come back when you meet a term you don't recognise.

ECN statuses

An ECN has exactly one status at a time. The **label** column is what you see on screen — the code in brackets appears in exports and in the API.

Label on screen	What it means	Who acts next
Draft 0	Being written. Only the originator can see it in their list as work-in-progress, and only they can edit it.	Originator
Eng Review 30	Submitted. A Senior or Chief Engineer is checking the technical content.	SE or CE
Mgmt Review 40	Under parallel review — several managers are asked at once, and each approves independently.	EM, QM, and any conditional roles
DC Approved 25	Everyone required has approved. Waiting on the Document Controller's final gate.	Document Controller
Approved 50	The DC has released it. Oskar is now writing the changes into Movex.	Nobody — the system is working
Movex Updated 60	Every Movex write succeeded. The change is live in the ERP.	Document Controller, to close it
Closed 70	Finished. The record is kept for audit.	Nobody — terminal
Rejected 65	Sent back with a reason. The originator can revise and resubmit.	Originator
Cancelled 80	Abandoned deliberately. Cannot be reopened.	Nobody — terminal
On Hold 90	Paused by the DC or an Administrator. Returns to whatever status it was in before the hold.	DC or Administrator

Why the numbers jump around. **DC Approved** is 25 even though it comes *after* **Mgmt Review** (40). The codes reflect an earlier design; two old statuses (10 and 20) were removed and their numbers deliberately never reused, so historical records stay unambiguous. The order on screen is the real order.

Roles

Oskar has 14 role codes. Most people hold one; a Document Controller often holds two.

Always required

Code	Name	What they do
OR	Originator	Raises the ECN, fills it in, submits it, and resubmits it if rejected.
SE	Senior Engineer	Technical review at Eng Review.
CE	Chief Engineer	Alternative to SE, and the escalation route for harder changes.
EM	Engineering Manager	Approves at Mgmt Review. Always required.
QM	Quality Manager	Approves at Mgmt Review. Always required.
DC	Document Controller	The final gate before anything reaches Movex, and the only role that closes an ECN.

Required only in certain conditions

These are added automatically when the ECN's change scope calls for them. If the condition doesn't apply, the step is skipped and that person is never notified.

Code	Name	Added when
PM	Production Manager	The ECN changes routing or operations
SC	Supply Chain	The ECN adds new parts or affects lead times
FN	Finance	The cost change exceeds the configured threshold
CA	Cost Accountant	Reviews cost impact. Has no veto — cannot block the ECN.

Notified, but never asked to approve

Code	Name	Notified when
RD	R&D / Product Engineering	The change affects their product family
TE	Test Engineering	The ECN updates a controlled document
MQ	Manufacturing Quality	The ECN reaches Closed

Administration

Code	Name	What they do
AD	Administrator	Places ECNs on hold, resumes them, and overrides role assignments. No approval authority.

Being in a role is not the same as having access. Your role decides what you're *asked* to do on a particular ECN. Whether you can sign in at all is controlled separately by Active Directory groups — see [Access and onboarding](#).

Change scope

When you create an ECN you tick the boxes describing what the change touches. **These determine who has to approve it**, so they are worth getting right — see [Raising an ECN](#).

Scope	Effect
New parts	Supply Chain review
Change to existing parts	Supply Chain review
BOM structure change	Engineering Manager review
Routing / process change	Production Manager review
Work centre or run-time change	Production Manager review
Supplier lead time affected	Supply Chain review
Drawing or document update	Test Engineering notified
Add or update an MPN	Supply Chain review
Regulatory / compliance impact	Mandatory Quality Manager review

Facilities

Code	Plant
D	Melbourne — the default
L	Johor Bahru

Facility matters more than it looks. Role assignments are **per plant**: the Quality Manager for Melbourne and the Quality Manager for Johor Bahru are different people, and Oskar picks the right one based on the ECN's facility.

Terms

BOM — Bill of Materials. The structured list of components that make up an assembly, including quantity and which operation consumes each part.

Component — a part that appears *inside* a BOM. The assembly it belongs to is the **parent item**.

Controlled document — a drawing, work instruction, test spec or similar whose revisions must be tracked for quality compliance.

ECN — Engineering Change Notice. The formal record that a product design, bill of materials, or manufacturing process has been changed, who approved it, and when it took effect. It is both a workflow and an audit record: quality standards require that changes to a released product are reviewed and approved before they take effect, by people qualified to judge the impact.

Effectivity — when a change takes effect. Every item on an ECN needs one, and Oskar will not let you submit without it.

MPN — Manufacturer Part Number. The manufacturer's own code for a component, as distinct from your internal item number. One item can have several MPNs from different manufacturers; one is marked the default for purchasing.

Movex (also **M3**) — the ERP system that runs the business. Movex is the **single source of truth** for items, BOMs and routings. Oskar does not replace it: Oskar governs *how changes get into* Movex. Once an ECN is approved, Oskar writes the change into Movex automatically.

Operation — a single step in manufacturing a part, performed at a work centre. Routing is the ordered set of operations.

Outbox — the queue Oskar uses to write approved changes into Movex. If a write fails it is retried automatically; persistent failures are visible to the DC in the admin console. You will only encounter the term when something has gone wrong.

Routing — the sequence of manufacturing operations for an item: which work centre, how long to set up, how long to run.

Stargile — the legacy system Oskar replaces. See [Coming from Stargile](#).

Work centre — the machine, cell or station where an operation is performed.

Acronyms you may meet

Term	Meaning
CPN	Customer Part Number — the customer's code for a part you also number internally
IPN	Internal Part Number — your own item number
MPN	Manufacturer Part Number
BOM	Bill of Materials
ECN	Engineering Change Notice
ERP	Enterprise Resource Planning — the business system, here Movex/M3
EOL	End of Life — a component the manufacturer has discontinued
NRND	Not Recommended for New Designs — still available, but avoid designing it in
WAPC	Weighted Average Purchase Cost

⚠ **IPN, CPN and WAPC are used in the system but never defined anywhere in it.** The meanings above are the working definitions used by this manual and should be confirmed with Engineering before anyone relies on them.

Raising an ECN

For engineers, designers and anyone who needs a change made to a product, its bill of materials, or the way it is manufactured.

This is the longest chapter in the manual, because raising the ECN is where most of the thinking happens. Everything after it is review.

Before you start

Have ready:

- **What is changing, and why.** You will be asked to write this in plain language for people who are not you.
- **The item numbers involved.** If parts are new, they do not need to exist in Movex yet — Oskar creates them. **Do not create them in Movex first.**
- **Which plant** the change is for: Melbourne (D) or Johor Bahru (L).

You do **not** need to work out who has to approve it. Oskar does that from the change scope.

Step 1 — Create the ECN

Click + **New ECN** from the ECN list.

← ECNs

+ New Engineering Change Notice

Change details

Describe what is changing and why

Title *

e.g. Replace C0402 caps on PCBA-LF-001 with Murata equivalent

Description *

Explain what is changing, why it's necessary, and any relevant part numbers or references.

Facility

D — Melbourne

Customer *

Type to search customers...

Customer ECN Refs (optional, comma-separated)

e.g. ECN-2024-001, CR-45678

Change scope *

Select all categories that apply

☐ New parts

One or more part numbers being introduced that do not yet exist in Movex — triggers Supply Chain review

☐ BOM structure change

Adding, removing or re-quantifying components in an existing Bill of Materials — triggers Engineering Manager review

☐ Work centre or run-time change

Modifying an existing operation's work centre code, run time or setup time without adding or removing the operation itself — triggers Production Manager review

☐ Drawing or document update

A controlled document is being revised: assembly drawing, schematic, work instruction, test spec or similar — notifies Test Engineering

☐ Regulatory / compliance impact

The change may affect RoHS, REACH, IPC class, customer qualification, or product certification (e.g. UL, CE mark) — triggers mandatory Quality Manager review under ISO 13485 §7.3.9

☐ Change to existing parts

Modifying an existing part's specification, unit of measure, or status in Movex — triggers Supply Chain review

☐ Routing / process change

Adding, removing or resequencing manufacturing operations (e.g. SMT, wave solder, conformal coat) — triggers Production Manager review

☐ Supplier lead time affected

The change is expected to alter the procurement lead time for one or more parts — triggers Supply Chain review

☐ Add or update an MPN

A Manufacturer Part Number is being introduced or changed — triggers Supply Chain review to validate the supplier and sourcing data in Movex

Cancel

Create ECN

The new ECN form, showing change details and the nine change-scope options

Change details

Field	Notes
Title	Required. One line, specific. <i>"Replace C0402 caps on PCBA-LF-001 with Murata equivalent"</i> beats <i>"Cap change"</i> — it is what everyone sees in their workload.
Description	Required. What is changing, why it is necessary, and any part numbers or references. Reviewers judge the change from this.
Facility	Melbourne (D) is the default. This decides who reviews it — role assignment is per plant.
Customer	Type to search. Leave blank if the change is not customer-driven.
Customer ECN Refs	Optional. The customer's own reference, if they raised the change. Comma-separated for several.

Change scope — the part that matters

The nine tick-boxes are **not** documentation. They decide who has to approve your ECN.

Tick this	If	It summons
New parts	Part numbers are being introduced that do not exist in Movex yet	Supply Chain
Change to existing parts	An existing part's specification, unit of measure or status is changing	Supply Chain
BOM structure change	Components are being added, removed or re-quantified	Engineering Manager
Routing / process change	Manufacturing operations are being added, removed or resequenced	Production Manager
Work centre or run-time change	An existing operation's work centre, run time or setup time changes	Production Manager
Supplier lead time affected	Procurement lead time will change	Supply Chain
Drawing or document update	A controlled document is being revised	Test Engineering (<i>notified</i>)
Add or update an MPN	A manufacturer part number is being introduced or changed	Supply Chain
Regulatory / compliance impact	RoHS, REACH, IPC class, customer qualification or certification may be affected	Quality Manager (<i>mandatory</i>)

Tick everything that genuinely applies. Under-ticking is the more common mistake and the more damaging one: a routing change that does not summon the Production Manager gets approved by people who never saw the part that matters to them.

Over-ticking wastes a colleague's time. Under-ticking puts an unreviewed change into production.

Click **Create ECN**. It is now in **Draft**, and only you can see it as work in progress.

Step 2 — Add the content

A Draft ECN with a title and description is not yet a change — you need to say what actually changes. That happens on the four tabs.

[DEMO] BOM changes — Widget Assembly A rev

Edit

Rev change on Widget Assembly A (LF100001): add a new bypass capacitor at op 10, swap the MCU for a pin-compatible variant with higher flash, and remove the now-redundant status LED.

ORIGINATOR	FACILITY	CUSTOMER	REVISION	CREATED	AGE
hsalazar	D	—	Rev 1	21 Aug 2026	0 days

DMR DOCUMENTAdd link

No document linked

New parts

Workflow

DC may reassign roles at any stage

Draft

In progress

← ECNs | ECN-2026-D-0032 | Draft | [DEMO] BOM changes — Widget Assembly A rev

Submit for ReviewCancel ECN

Engineering Review

Management Review

DC Approval

Approved — Movex Write

Movex Updated

Closed

Items (1)RoutingBOM ChangesMPNs

↓ Export↑ Upload BOM Changes

LF200021LF100001ADDNew: 1 EA @ OPNO 10

LF200012LF100001CHANGEOld: 1 @ OPNO — New: 1 EA @ OPNO 10

LF200015LF100001DELETEOld: — @ OPNO —

Notes & CommentsHistory

No comments yet. Be the first to add a note.

Add a note... (Ctrl+Enter to submit)

Post comment

Revision Lineage1 eventChain verifiedExpand

Immutable audit chain — every status transition, SHA-256 linked.

The BOM Changes tab on a Draft ECN

Tab	What goes here
Items	The parts themselves — new items to create, or existing items whose master data changes
Routing	Manufacturing operations: work centre, run time, setup time
BOM Changes	Components going into an assembly, or coming out of it
MPNs	Manufacturer part numbers against your items

Each tab has + **Add** for one row at a time, and **Upload** ↑ for a spreadsheet. For more than a handful of rows, use the upload — see [Bulk uploads](#).

Order matters — for routing and MPNs

Add items before routing operations or MPNs. Both reference an item number and will be rejected if the item is not already on the ECN. Routing upload in particular does not create items.

BOM changes are the exception — they do not need an item. A BOM change names its parent assembly directly, so an ECN that revises only a structure needs no items at all. See [BOM-only ECNs](#) below.

Effectivity — the field that catches people out

Every item needs an **effectivity type**, which says *when* the change takes effect:

Type	Meaning
IMMEDIATE	Takes effect as soon as the ECN is implemented
DATE	Takes effect on a specific date — you must also give the date
ECN	Takes effect when tied to another ECN

Choosing **DATE** without filling in the date is the single most common reason an item will not save.

BOM change types

On the BOM Changes tab each row is one of three kinds, shown as coloured badges in the screenshot above:

- **ADD** — a component going into the assembly
- **CHANGE** — an existing line being modified. Needs the *old* values so Oskar knows which line you mean.
- **DELETE** — a component coming out

BOM-only ECNs — changing a structure with no item change

Revising an assembly's structure without touching any item master record is a normal, frequent case. You do **not** need to add the parent as an item to do it.

On the **BOM Changes** tab, click + **Add BOM change**. Type the parent assembly's item number and the change stands on its own. Rows created this way are labelled **BOM only**, which tells reviewers no item-master change is implied — previously you had to add a dummy item row, which made it look like the item itself was

changing when it was not.

The parent must already exist in Movex. Oskar checks this when you save, and will tell you if the number is wrong.

Browsing the current BOM. In the same panel, enter a parent number and click **Browse** to see that assembly's live Movex structure. Click **Change** or **Remove** on any line to author against it — the existing values, including the *old from date*, are filled in for you. This is worth using for CHANGE and DELETE rows: the old from date has to match the live Movex line exactly, and typing it by hand is the easiest thing to get wrong.

Step 3 — Submit

When the ECN is complete, click **Submit for Review**.

Oskar checks three things:

- You are the originator — **only you can submit your own ECN**
- The title is not empty
- The ECN carries **some content** — at least one item, routing operation, BOM change or MPN

The content check is deliberately loose. It stops a completely empty ECN reaching a reviewer, but it cannot tell whether what you have added is *right* or complete. A BOM-only ECN with no items passes, because that is a legitimate change. Check the tabs before you submit — nothing else will.

Once submitted the ECN moves to **Engineering Review** and **you can no longer edit it**. That is deliberate: reviewers must be able to trust that what they approved is what gets built.

What happens next

1. **Engineering Review** — a Senior or Chief Engineer checks the technical content.
2. **Management Review** — everyone required by your change scope reviews **in parallel**.
3. **DC Approval** — the Document Controller does the final check.
4. **Movex write** — Oskar writes your change into the ERP automatically.
5. **Closed** — the Document Controller closes it.

You are emailed if anything needs you. You do not need to chase it.

If your ECN is rejected

Rejection is normal and not a black mark. You will get an email with the reviewer's reason, and the ECN returns to you.

1. Read the reason. It is mandatory, so there will always be one.
2. Open the ECN — **you can edit it again** now that it is back with you.
3. Fix what was raised. Use **Notes & Comments** if you need to discuss it.
4. Click **Resubmit**.

The ECN goes back to **Engineering Review**, not to whoever rejected it. The whole technical review runs again, because your changes may affect things that were already approved.

Only you can resubmit. If you are away, the Document Controller can reassign the originator role.

Cancelling

If a change is abandoned, click **Cancel ECN** and give a reason. Cancelling is **permanent** — a cancelled ECN cannot be reopened, so raise a new one if the change comes back.

Originators, Document Controllers and Administrators can cancel.

Common mistakes

Mistake	What happens
Creating the item in Movex first	Duplicate items. Oskar writes to Movex for you — let it.
Under-ticking the change scope	The right reviewers are never asked
Uploading routing before items	Every row rejected: the items do not exist on the ECN yet
DATE effectivity with no date	The item will not save
Raising separate ECNs for items, routing and BOM	Unnecessary. One ECN covers all four — that is the point of the tabs.
Submitting an empty ECN	Nothing stops you. A reviewer's time is wasted.

Approving an ECN

For Engineering Managers, Quality Managers, Production Managers, Supply Chain, Finance, Cost Accountants, and Senior or Chief Engineers.

Finding what needs you

Two ways, and you don't need both:

- **Email.** Oskar emails you when an ECN needs your approval, and chases you at 48 hours — copying your Engineering Manager. See [Notifications](#).
 - **The worklist.** Click the **Require my action** card on the ECN list. That is the definitive answer to "what's waiting on me?"
-

Why you were asked

You are asked for one of two reasons.

You are a mandatory approver. Engineering Manager and Quality Manager are asked on *every* ECN, no exceptions.

The change scope pulled you in. The originator ticked something that requires your judgement:

If they ticked...	You are asked, as...
Routing / process change, or work centre / run-time change	Production Manager
New parts, changed parts, supplier lead time, or add/update an MPN	Supply Chain
Regulatory / compliance impact	Quality Manager (mandatory review)
BOM structure change	Engineering Manager

If the scope doesn't apply to you, Oskar marks your step **skipped** and never notifies you. You will see **skipped** against roles that weren't needed — that is normal, not an oversight.

Management Review happens in parallel

This is the biggest difference from a traditional approval chain, and the thing most worth understanding.

[← ECNs](#)
[ECN-2026-D-0026](#)
[Mgmt Review](#)
[\[DEMO\] New IC — LM2596 buck converter](#)
[Cancel ECN](#)

[DEMO] New IC — LM2596 buck converter

Introducing LM2596 step-down DC/DC converter on PCBA-LF-003 to replace linear regulator LM7805. Reduces heat dissipation by ~60%. New layout required — drawing number to be assigned by DC.

ORIGINATOR	FACILITY	CUSTOMER	REVISION	CREATED	AGE
hsalazar	D	—	Rev 1	21 Aug 2026	0 days

DMR DOCUMENT [Add link](#)
No document linked

[New Item](#) [Routing change](#)

Workflow

DC may reassign roles at any stage

- ✓

Draft

Done

Originator

hsalazar auto
- ✓

Engineering Review

Done
- Management Review

ER	Engineering Manager	em_user	pending
FR	Finance	—	skipped
PR	Production Manager	pm_user	pending
QR	Quality Manager	qm_user	pending
SC	Supply Chain	—	skipped
- DC Approval
- Approved — Movex Write
- Movex Updated
- Closed

Actions [Reject](#)

Items (1)

Routing

BOM Changes

MPNs

↓ Export

↑ Upload

+ Add item

LF-IC-0220

IC Buck Conv LM2596 TO-263

New

1 item total

Notes & Comments

History

No comments yet. Be the first to add a note.

Add a note... (Ctrl+Enter to submit)

Post comment

Revision Lineage

3 events
Immutable audit chain — every status transition, SHA-256 linked.

Chain verified

Expand

Management Review with three roles pending and two skipped

Everyone required at Management Review is asked **at the same time**. You are not waiting for the person above you, and nobody is waiting for you before they can start.

In the screenshot: Engineering Manager, Production Manager and Quality Manager are all **pending** simultaneously. Finance and Supply Chain are **skipped** — this change affected neither.

The ECN moves on by itself once the last required approval lands. Nobody has to push it. If you are the last of three to approve, clicking Approve advances the whole ECN to the Document Controller.

Reviewing the change

Before you approve, the detail screen gives you everything you need:

- **The header** — what's changing and why, in the originator's words, plus the scope pills showing what it touches.
- **The tabs** — Items, Routing, BOM Changes and MPNs. This is the substance. Check the tab that matches your area: a Production Manager should be reading **Routing**; Supply Chain should be reading **Items** and **MPNs**.
- **Notes & Comments** — ask a question here rather than by email, so the answer stays attached to the ECN and the next reviewer can see it.

What to check

Your role	Worth checking
Engineering Manager	Is the change technically sound? Is the BOM impact understood?
Quality Manager	Regulatory impact, customer qualification, whether controlled documents need revising
Production Manager	Can the line actually run this? Are routing times realistic?
Supply Chain	Are the new parts sourceable? Do lead times work? Is the default MPN right?
Finance	Cost impact against the threshold
Senior / Chief Engineer	The whole technical package, before it reaches management

Approving

The action buttons sit at the bottom of the Workflow panel.

Approve — records your approval for *your* role. If other roles are still pending, the ECN stays at Management Review until they are done.

Reject — sends it back to the originator. **A reason is mandatory** and Oskar will not let you proceed without one. Write something the originator can act on: "*obtain coating compatibility report from the supplier and resubmit*" is useful; "*not acceptable*" is not.

Rejecting is not a failure of the process — it is the process working. A rejected ECN can be revised and resubmitted, and it returns to Engineering Review so the change is re-checked from the top.

You cannot approve your own ECN

If you raised it, you cannot approve it, even where you legitimately hold the role. Oskar blocks self-approval outright — it is a quality requirement, not a configuration choice.

If you are the only person in your role and you need to raise a change yourself, the Document Controller can assign that role to someone else for that ECN. Ask them.

Engineering Review — for Senior and Chief Engineers

Senior and Chief Engineers act one stage earlier, at **Engineering Review**, before management sees the ECN at all. This is the technical gate: the change should be right before managers are asked to sign it off.

The button reads "**Approve — send to Management Review**". Either role can act; you do not both need to.

The Cost Accountant is different

The Cost Accountant reviews cost impact but **has no veto**. You will be asked, and your view is recorded, but the ECN does not stop for you. If you have a real objection, raise it in the comments and speak to the Engineering Manager or Document Controller.

After you approve

Once everyone required has approved, the ECN goes to the **Document Controller** for a final check before anything is written into Movex.

-- ECNs | **ECN-2026-D-0027** **DC Approved** [DEMO] Routing change — remove wave solder op **DC Approve — send to Movex** **Cancel ECN**

[DEMO] Routing change — remove wave solder op

Wave solder operation (op 30) on PCBA-LF-007 is redundant following conversion to full SMT. Removing to reduce cycle time by 8 min/board.

ORIGINATOR	FACILITY	CUSTOMER	REVISION	CREATED	AGE
hsalazar	D	—	Rev 1	21 Aug 2026	0 days

DMR DOCUMENT [Add link](#)
No document linked

Routing change Operation change

Workflow

DC may reassign roles at any stage

- Draft** Done

Originator
 or
 hsalazar auto
- Engineering Review** Done

ER Engineering Manager em_user approved
- Management Review** Done

FR Finance — skipped

PR Production Manager pm_user approved

QR Quality Manager qm_user approved

SC Supply Chain — skipped
- DC Approval** In progress

Approved — Movex Write

Movex Updated

Closed

Actions **Reject**

Items (1)

Routing BOM Changes MPNs Export Upload Add item

LF-PCBA-007 PCBA Power Supply LF-007 >

1 item total

Notes & Comments

History

No comments yet. Be the first to add a note.

Add a note... (Ctrl+Enter to submit)

Post comment

Revision Lineage

4 events
Immutable audit chain — every status transition, SHA-256 linked.

Chain verified Expand

The Document Controller's gate, with all approvals in

Notice the three roles now marked **approved** and the two still **skipped** — the same ECN as before, one stage further on. The Document Controller's button reads "**DC Approve — send to Movex**", which is the point of no return: after that, Oskar starts writing to the ERP.

You will not hear about the ECN again unless it is rejected later and resubmitted — or you are a Manufacturing Quality observer, who is notified when it closes.

If you cannot see an Approve button

In order of likelihood:

1. **You have already approved.** Check the Workflow panel — your row will say **approved**.
2. **You are not assigned to that role on this ECN.** Role assignment is per ECN and per plant.
3. **You raised it.** Self-approval is blocked.
4. **It is not at your stage yet.** A Senior Engineer cannot approve at Management Review.
5. **Your access groups are wrong** — a question for IT rather than the DC. See [Access and onboarding](#).

More detail in [When things go wrong](#).

The Document Controller

The Document Controller is the last human gate before a change reaches Movex, and the only role that can close an ECN. It is also the only role with hold, resume and recovery powers.

If you are a DC, this chapter is yours — but read [Approving an ECN](#) first, because you are an approver too.

Your two group memberships

A DC needs **both** `ecn-doc-controller` and `ecn-approver`. Oskar checks them independently, so an account with only the DC group passes the document-control gate but is rejected on ordinary approvals.

If you can DC-approve but not approve at Management Review, that is the cause. See [Access and onboarding](#).

The DC gate

When everyone required has approved, the ECN reaches **DC Approved** and waits for you.

← ECNs | **ECN-2026-D-0027** | **DC Approved** | [DEMO] Routing change — remove wave solder op

DC Approve — send to Movex **Cancel ECN**

[DEMO] Routing change — remove wave solder op

Wave solder operation (op 30) on PCBA-LF-007 is redundant following conversion to full SMT. Removing to reduce cycle time by 8 min/board.

ORIGINATOR	FACILITY	CUSTOMER	REVISION	CREATED	AGE
hsalazar	D	—	Rev 1	21 Aug 2026	0 days

DMR DOCUMENT [Add link](#)
No document linked

Routing change **Operation change**

Workflow
DC may reassign roles at any stage

- Draft** Done
Originator: hsalazar auto
- Engineering Review** Done
- Management Review** Done
 - ER Engineering Manager em_user approved
 - FR Finance — skipped
 - PR Production Manager pm_user approved
 - QR Quality Manager qm_user approved
 - SC Supply Chain — skipped
- DC Approval** In progress
- Approved — Movex Write
- Movex Updated
- Closed

Actions **Reject**

Items (1) **Routing** **BOM Changes** **MPNs** **Export** **Upload** **Add item**

LF-PCBA-007 PCBA Power Supply LF-007 >

1 item total

Notes & Comments History

No comments yet. Be the first to add a note.

Add a note... (Ctrl+Enter to submit)

Post comment

Revision Lineage 4 events Chain verified **Expand**

Immutable audit chain — every status transition, SHA-256 linked.

An ECN at the DC gate, with all approvals in

Your button reads "DC Approve — send to Movex", and it is worth taking that label literally. Clicking it authorises Oskar to write the change into the ERP. Everything before this point is reversible; this is the point of no return.

What to check before you click

- **The approvals are all in.** The Workflow panel shows **approved** or **skipped** against every role. Anything still **pending** means the ECN should not have reached you.
- **The content matches the description.** Open each tab that the change scope implies. A "routing change" ECN with an empty Routing tab is a mistake someone should catch, and you are the last person who can.

- **Customer approval, if required.** If the ECN is flagged as needing customer approval, Oskar **will not let you approve** until it is recorded. This is an ISO 13485 requirement and the system enforces it rather than trusting memory.
- **Drawing numbers**, if your process expects them. Oskar treats these as optional — it will not stop you.

You can also **Reject** from here, with a mandatory reason, exactly as any other reviewer can.

What happens after you approve

Oskar queues the change and writes it into Movex — item master records, BOM lines, routing operations, MPN aliases — in the correct order, retrying automatically if a write fails.

When every write succeeds, the ECN advances to "Movex Updated" on its own. You do not need to do anything. If it has not advanced after a few minutes, something failed — see [Recovering a failed write](#) below.

Closing the ECN

This is a deliberate action, and only you can take it. An ECN at "Movex Updated" stays there until a Document Controller clicks **Close ECN**.

Nothing closes automatically. If your open-ECN list is growing, ECNs sitting at "Movex Updated" are the likely reason — the change is already live in Movex, and only the paperwork is open.

Before closing, check the **Implementation Schedule** panel if your site uses it. It carries the post-implementation checklist — engineering tasks and Program Manager WIP impact — with a progress ring showing how much is done.

Closing is final. A closed ECN is kept for audit and cannot be reopened.

Putting an ECN on hold

Holds are for changes that are genuinely paused — waiting on a supplier report, a customer decision, a test result — rather than ones that are merely slow.

← ECNs | **ECN-2026-D-0030** On Hold [DEMO] Supplier change — TDK to Murata inductors
Resume Cancel ECN

[DEMO] Supplier change — TDK to Murata inductors

Second-source the 10uH power inductor on PCBA-LF-004 from Murata following extended TDK lead times. Electrically equivalent; footprint identical.

ORIGINATOR	FACILITY	CUSTOMER	REVISION	CREATED	AGE
hsalazar	D	—	Rev 1	21 Aug 2026	0 days

DMR DOCUMENT [Add link](#)
No document linked

[New parts](#) [Lead time change](#)

Workflow

DC may reassign roles at any stage

On Hold
DC may resume when ready.

Items (1)
Routing
BOM Changes
MPNs

↓ Export
↑ Upload
+ Add Item

LF-IND-0010 Inductor 10uH 20% 1210 New

1 item total

Notes & Comments

History

No comments yet. Be the first to add a note.

Add a note... (Ctrl+Enter to submit)

Post comment

Revision Lineage

4 events
Immutable audit chain — every status transition, SHA-256 linked.

Chain verified [Expand](#)

Implementation Schedule

Mark items as applicable to begin [View Open Orders](#)

0 / 0 No tasks marked applicable yet

ENGINEERING

PROGRAM MANAGER — WIP IMPACT

An ECN on hold, showing the Resume button

Only a **DC** or an **Administrator** can hold or resume. Oskar requires two things and will not proceed without them:

- **A reason** — visible to everyone, so the originator knows why their change stopped
- **An expected resume date** — so a hold does not quietly become abandonment

A held ECN keeps its place. **Resume** returns it to exactly the status it was in before, with all approvals intact.

Use hold rather than rejection when the change itself is fine and the timing is not. Rejecting sends it back to the originator and discards the review progress; holding preserves it.

Recovering a failed write

Sometimes a Movex write fails — the ERP is down, a field is rejected, a network drops. Oskar retries automatically on a back-off schedule and alerts you if retries keep failing.

Go to **Admin → Movex Write Recovery**. You will see any writes that failed or were abandoned, with the error Movex returned.

For each one you can **Retry**, which re-queues it. Retry once the underlying cause is fixed — retrying against an ERP that is still down just burns another attempt.

A stuck write is not a silent failure. Oskar knows the write did not land and will not advance the ECN. What it cannot do is fix the cause, which is why this screen exists.

If retries do not clear it, the change did not reach Movex and someone needs to look at why. Escalate rather than closing the ECN — closing it would record a change that never happened.

Reassigning roles

You can change who holds a role on a specific ECN — useful when someone is on leave, has left, or when the originator legitimately holds the only approving role.

The Workflow panel notes *"DC may reassign roles at any stage"*. Reassignment applies to that ECN only; it does not change anyone's standing role, which lives in **Admin → ECN Role Assignments** (see [Admin](#)).

The audit trail

Every ECN carries a **Revision Lineage** panel: every status change, who made it, when, and why, linked cryptographically so the record cannot be altered after the fact. A **Chain verified** badge means it is intact.

This is what you show an auditor who asks to see the history of a change. Click **Expand** for the full sequence.

Your daily summary

You get one email a day listing every open ECN for **your plant**: number, title, status, originator, age, and who it is waiting on. Melbourne DCs see Melbourne ECNs; Johor Bahru DCs see Johor Bahru ECNs.

This replaces the old nightly Stargile report. See [Notifications](#).


Things only you can do

Action	Who else can
DC-approve, sending the change to Movex	Nobody
Close an ECN	Nobody
Place on hold / resume	Administrators
Retry a failed Movex write	Administrators
Reassign a role on an ECN	Administrators
Cancel an ECN	The originator, and Administrators

Admin

For Document Controllers and Administrators. Nobody else needs this chapter — the Admin link does not appear for other roles.

Reach it from **Admin** in the top navigation.

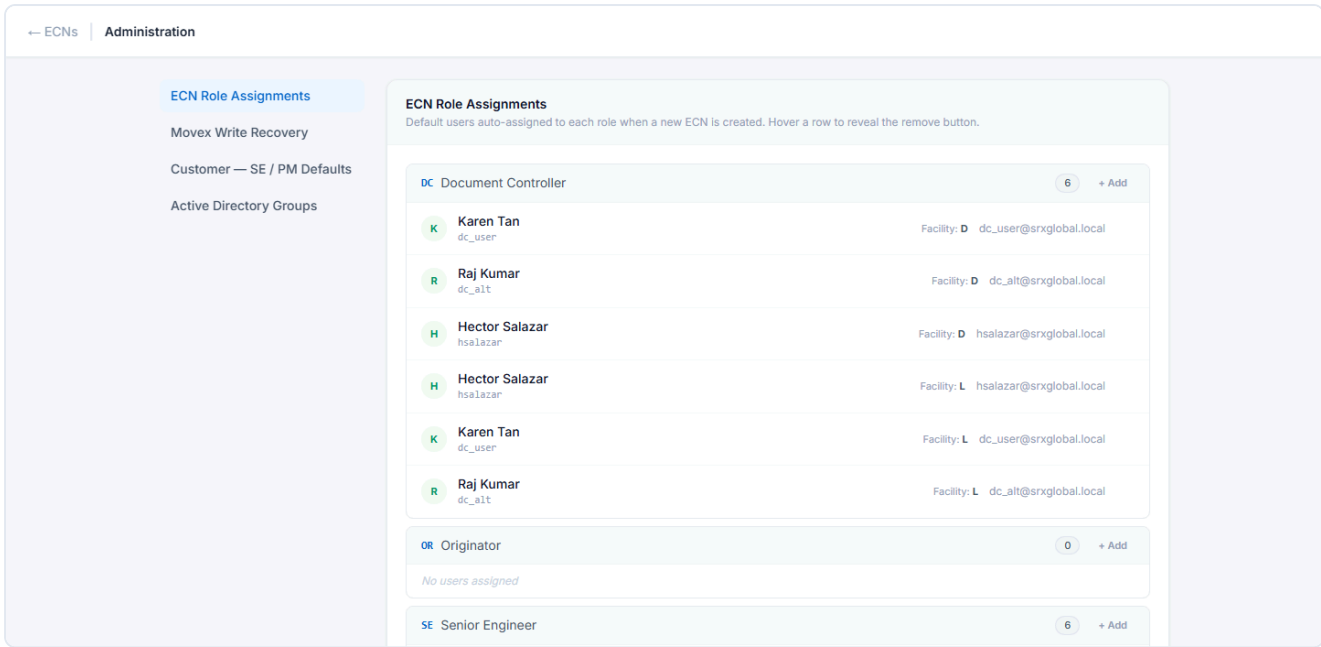

The Admin console, showing the four sections

Four sections down the left:

Section	What it is for
ECN Role Assignments	Who holds each role, per plant. The most-used screen here.
Movex Write Recovery	Retry writes to Movex that failed
Customer — SE / PM Defaults	Pre-set the Senior Engineer and Production Manager per customer
Active Directory Groups	Read-only view of who is in which access group

ECN Role Assignments

This is the **standing** roster: who is the Quality Manager for Melbourne, who are the Document Controllers for Johor Bahru, and so on. When someone raises an ECN, Oskar fills the approval steps from this list.

Roles are grouped, each showing its members with their plant and email. To add someone, click **+ Add** on the role, enter their **AD username** (e.g. `jsmith`), optionally a display name, and pick the facility.

Two things to get right

Facility is not optional in practice. A user added to Quality Manager for Melbourne (D) will never be assigned to a Johor Bahru ECN. If someone covers both plants, **add them twice** — once per facility.

Order matters. The first person listed for a role at a facility is the **default assignee**. Later entries are backups who can act but are not auto-assigned. If the wrong person is being picked, it is because they are first in the list.

Removing someone

Use **Remove this user from role**. This affects future ECNs only — it does not disturb ECNs already in flight, and it does not erase their past approvals, which stay in the audit trail permanently.

Removing a leaver is not optional housekeeping. If the only Document Controller for a plant leaves and is not replaced here, every ECN at that plant stalls at the DC gate with nobody able to act. Do this as part of offboarding.

Assignment vs access

This screen decides *who is asked*. It does not decide *who can sign in* — that is Active Directory, covered in [Access and onboarding](#).

Both must be right. Someone on this list but not in the right AD group is assigned work they cannot action, which looks like a broken ECN rather than an access problem.

Movex Write Recovery

When the Document Controller approves, Oskar writes the change into Movex. If a write fails — the ERP is down, a field is rejected, the network drops — Oskar retries automatically on a back-off schedule, and surfaces persistent failures here.

Each entry shows the ECN, the transaction attempted, and the error Movex returned. **Retry now** re-queues it.

Fix the cause before retrying. Retrying against an ERP that is still unreachable just consumes another attempt. A `Communication link failure` or `CWBC01004` means the AS/400 is not reachable — that is an infrastructure problem, not an Oskar one, and retrying will not help until it is fixed.

The ECN stays at **Approved** until every write succeeds. That is deliberate: Oskar will not report a change as implemented when it has not reached the ERP.

If retries keep failing after the cause is fixed, escalate rather than closing the ECN — closing it would record a change that never happened.

Customer — SE / PM Defaults

Some customers are always handled by the same Senior Engineer or Production Manager. This screen pre-sets that, so an ECN raised against that customer is assigned to the right person without the originator having to know.

Search by customer name or CUNO, then add candidates for **SE** or **PM**. Where several exist, one is marked **Default**.

Only those two roles support customer defaults. Everything else comes from the standing roster above.

This is a convenience, not a control. The Document Controller can still reassign on any individual ECN.

Active Directory Groups

A **read-only** view of the three application groups and their members, read live from AD.

You cannot change anything here — group membership is IT's, not yours. The value is diagnostic: when someone says "I can't approve", this screen tells you whether they are in `ecn-approver` at all, without waiting on IT.

The groups are `ecn-initiator`, `ecn-approver` and `ecn-doc-controller`. Remember that a Document Controller needs **both** `ecn-doc-controller` and `ecn-approver` — a common and confusing misconfiguration.

You may also see `mes-*` and `pur-*` groups. Those belong to other systems and have no effect in Oskar.

If this screen shows an error rather than an empty list, the directory is unreachable — that is an IT problem. An error is not the same as "nobody is in the group", and Oskar deliberately distinguishes the two.

A note on what admin cannot do

Not possible here	Why
Change AD group membership	IT owns it
Edit an ECN's content	Even admins cannot — ask a reviewer to reject it back to the originator
Reopen a Closed or Cancelled ECN	Terminal states are final. Raise a new ECN.
Undo a Movex write	The change is in the ERP. Correct it with another ECN.
Alter the audit trail	It is tamper-evident by design

BOM tools

Three tools sit outside the ECN workflow and can be used at any time, without raising anything:

- **BOM Browser** — look up any assembly's structure, live from Movex
- **BOM Compare** — put two BOMs side by side and see what differs
- **MPN Search** — find which items use a given manufacturer part number

You do not need an ECN open to use any of them. They are reference tools.

BOM Browser

Reach it from **BOM** in the top navigation. Type an item number and click **Browse**.

Oskar / BOM Browser

hsalazar ECNs Sign out

LFAM050001

Browse

☐ Include expired lines

LFAM050001 SOLSHARE 35A PACKAGED UNIT

Compare against...

Facility: D Structure: 001 11 lines

Lines

Indented

Where used

SEQ	COMPONENT	DESCRIPTION	OP	QTY	UOM	EFFECTIVE	EXPIRES
10	LFAM050002	SOLSHARE 35A UNIT	190	1	EA	2024-01-19	—
20	LFAM050011	ASSY ACCS KIT SOLSHARE 35A	190	1	EA	2024-01-19	—
100	LFAM680001	CARTON SHIPPING SOLSHARE SET	190	1	EA	2024-01-18	—
105	LFAM680004	EXPORT PALLET 1200×1200 HEAT	190	0.166666	EA	2024-02-22	—
120	LFAM700002	LABEL RETURN SHIPMENT	190	1	EA	2024-01-18	—
140	LFAM700004	LABEL 3P-35A NAMEPLATE HELIOS	190	2	EA	2025-04-29	—
150	LFAM700006	LABEL UK Auth Representative	190	2	EA	2026-09-01	—
160	LFAM900001	RESIN RIBBON 110mmX300m RICOH	190	0.0005	M	2024-02-22	—
170	LFAM700030	DOCUMENT SolShare 3P Ref Guide	190	1	EA	2024-11-25	—
180	LFAM700031	DOC SolShare Mounting Template	190	1	EA	2025-02-28	—
200	LFAX700010	LABEL 0.5"H X 2"W WHT	190	3	EA	2025-04-29	—

The BOM Browser showing an assembly's component lines

The header confirms what you are looking at: item number, description, facility, structure type and line count. Underneath are three tabs.

Lines — the single-level view

The direct components of this assembly and nothing deeper.

Column	Meaning
Seq	Sequence number — the line's position in the BOM
Component	The part number going in
Description	What it is
Op	The operation that consumes it
Qty	How many per assembly
UOM	Unit of measure
Effective	The date this line came into force
Expires	When it stops applying, or – if open-ended

Include expired lines shows superseded lines as well as current ones. Leave it off for day-to-day work; turn it on when you need to understand what a BOM looked like historically.

Indented — the full explosion

Every level, not just the first.

Oskar / BOM Browser

hsalazar ECNs Sign out

LFAM050001

Browse

☐ Include expired lines

LFAM050001 SOLSHARE 35A PACKAGED UNIT

Facility: D Structure: 001 11 lines

Compare against...

Lines

Indented

Where used

▼ LFAM050001

▼ LFAM050002 SOLSHARE 35A UNIT

▶ LFAM050003 ASSY 3P ENCLOSURE MODULE

▶ LFAM050004 ASSY 3P BAFFLE BRACKET MODULE

▶ LFAM050005 ASSY CT MODULE #1

▶ LFAM050006 ASSY CT MODULE #2

▶ LFAM050007 ASSY CT MODULE #3

▶ LFAM050012 ASSY BOTTOM PLATE

▶ LFAM050013 ASSY GROUND ASSEMBLY

▶ LFAM050014 ASSY 3P RELAY MODULE L1,L2,L3

LFAM810001 firmware-OSv1.18_APPv1.0.5

LFAM810002 app-v1.0.6: SolShare Software

LFAM620001 CABLE POWER LINK CABLE

LFAM620002 CABLE L3 OUTPUT POWER LOOM

LFAM620003 CABLE L2 OUTPUT POWER LOOM

LFAM620004 CABLE L1 OUTPUT POWER LOOM

LFAM620005 Input power cable 10mm2 L1

LFAM620006 Input power cable 10mm2 L2

LFAM620007 Input Power Cable 10mm2 L3

LFAM620008 CABLE L1 REF VOLT CABLE LOOM

LFAM620009 CABLE L2 REF VOLT CABLE LOOM

LFAM620010 CABLE L3 REF VOLT CABLE LOOM

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 0 · cum 0

qty 0 · cum 0

qty 15 · cum 15

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

qty 1 · cum 1

The indented view, showing the full multi-level explosion


Sub-assemblies with their own components carry a **triangle** you can expand. Two quantities are shown per line:

- **qty** — how many per immediate parent
- **cum** — the cumulative quantity per *top-level* assembly

The distinction matters. A component with **qty 2** inside a sub-assembly used three times has **cum 6** — that is the number you order.

Where used — the reverse lookup

Which assemblies consume this part.

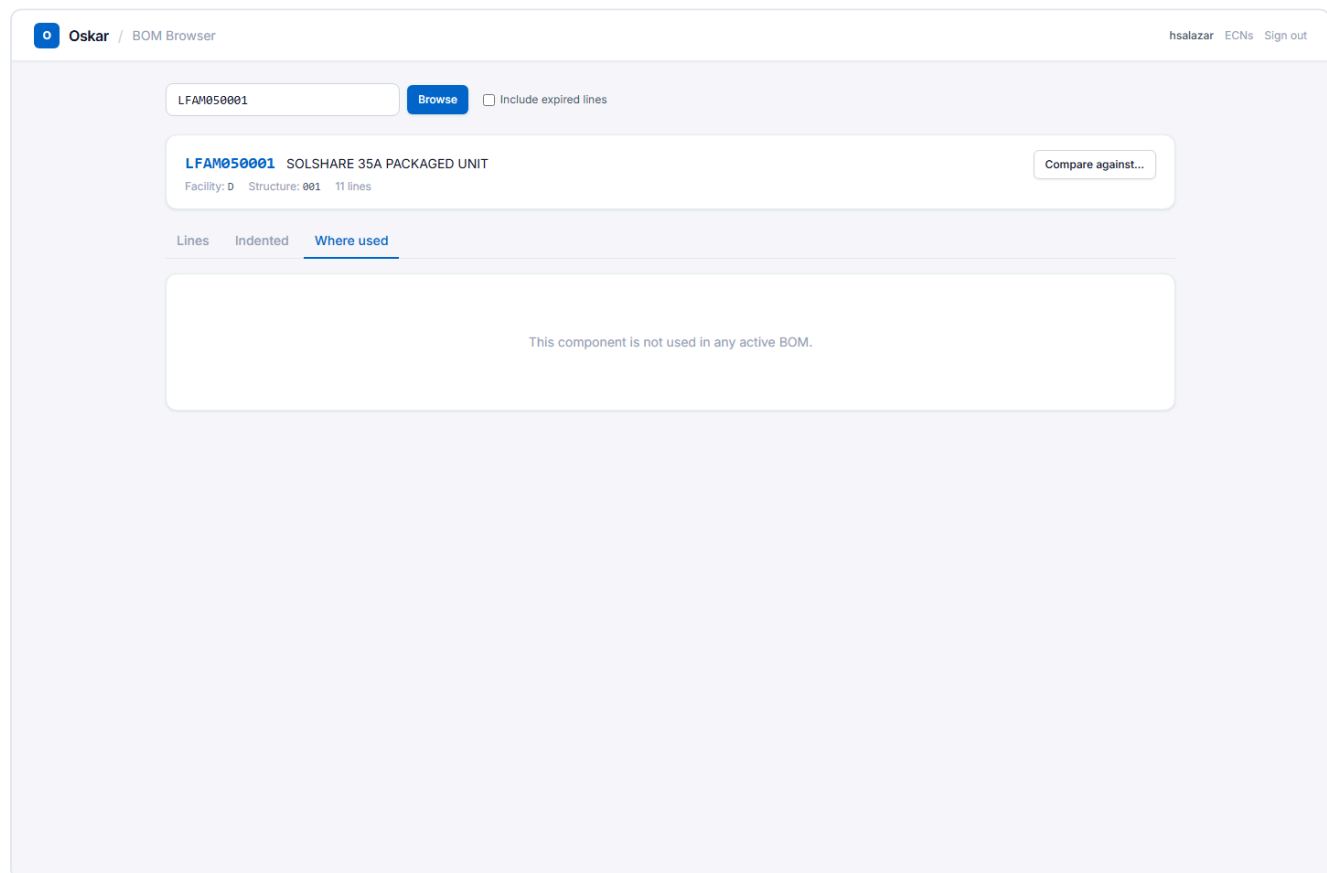

The where-used tab

This is the question to ask **before changing or obsoleting a component**: if a part appears in eleven assemblies, an ECN against one of them may not be the whole job.

A top-level assembly like the one above returns nothing, because it is not a component of anything. That is a correct answer, not an error.

BOM Compare

Reach it from **Compare against...** on the BOM Browser, or from **BOM → Compare** directly.

Oskar / BOM Compare

hsalazar Back to BOM Browser

OLD (LEFT)

Movex item

Upload file

Item number

D

NEW (RIGHT)

Movex item

Upload file

Item number

D

Comparison key

component_number,operation_num

Compare

The BOM Compare setup, with two sources and a comparison key

Two sides, **Old (left)** and **New (right)**. Each can be loaded from either of two sources:

- **Movex item** — a live BOM straight from the ERP. Enter the item number and facility.
- **Upload file** — a spreadsheet, typically a customer's BOM or one exported from CAD

That mix is the point. The common cases are:

Compare	Against	Answers
Movex item	Movex item	How do two revisions or two similar assemblies differ?
Upload	Movex item	Does what the customer sent match what we actually build?
Upload	Upload	Did the customer's new BOM change from their last one?

The comparison key

The **Comparison key** decides how lines from the two sides are matched up. The default is `component_number, operation_number` — two lines are "the same line" when both agree.

That default is right for comparing two Movex BOMs. When comparing against a customer's spreadsheet, their part numbers may not be yours, so you may need to key on something both sides share.

Reading the result

Results come back as **Differences**, **Additions** and **Subtractions**, with a side-by-side table: the old BOM on the left, the new on the right, and changes highlighted between them.

- **Additions** — lines on the new side only
- **Subtractions** — lines on the old side only
- **Differences** — lines on both sides where something changed (quantity, operation, unit)

You can export the result to `.xlsx` to send on or attach to an ECN.

MPN Search

Reach it from **MPN** in the top navigation.

 Oskar / MPN Search

hsalazar [Back to ECNs](#)

MPN Search

Search the Oskar MPN master (item_mpnns). Use * as a wildcard, e.g. STM32*.

MPN

Search

Item Number	Supplier	MPN	Manufacturer	Status
LF-RES-0010	—	RC0402FR-0710KL	YAGEO GROUP	Default CURRENT

1 result

MPN Search, showing a result with Default and CURRENT badges

Search the MPN master by **MPN**, **item number** or **manufacturer** — pick which with the dropdown beside the search box.

***** is the wildcard. `STM32*` finds every MPN starting with STM32. A bare `*` returns everything.

Reading the results

Column	Meaning
Item Number	The internal part this MPN belongs to
Supplier	The supplier, where recorded
MPN	The manufacturer's own part number
Manufacturer	Who makes it
Status	Badges — see below

Two badges matter:

- **Default** — this is the MPN purchasing buys by default. One per item.
- **CURRENT / EOL / NRND** — lifecycle. **EOL** means the manufacturer has discontinued it; **NRND** means it is still available but should not be designed into anything new.

An **EOL** badge on a default MPN is worth acting on: it means the part you buy by default is going away.

When to use which

Question	Tool
What goes into this assembly?	BOM Browser → Lines
What is the full parts breakdown, all levels?	BOM Browser → Indented
What else uses this component?	BOM Browser → Where used
Does the customer's BOM match ours?	BOM Compare, upload vs Movex
What changed between two revisions?	BOM Compare, Movex vs Movex
Who makes this part, and is it still current?	MPN Search
Which of our items use this manufacturer part?	MPN Search, by MPN

These tools are read-only

Nothing here changes anything. Browsing, comparing and searching leave no trace and cannot break anything — use them freely.

To actually change a BOM you need an ECN. See [Raising an ECN](#).

Bulk uploads


Anything you can add to an ECN one row at a time, you can also upload as a spreadsheet. For an ECN touching more than a handful of items this is much faster and far less error-prone than typing.

There are four upload types, one per tab on the ECN detail screen: **Items**, **Routing**, **BOM Changes** and **MPNs**. They all work the same way.

Ready-made example files are in the `templates/` folder next to this manual. Open the one you need, replace the example rows with your own data, and keep the header row exactly as it is.

Upload	Example file
Items	<code>item-upload-example.csv</code>
Routing	<code>routing-upload-example.csv</code>
BOM changes	<code>bom-changes-upload-example.csv</code>
MPNs	<code>mpn-upload-example.csv</code>

How an upload works

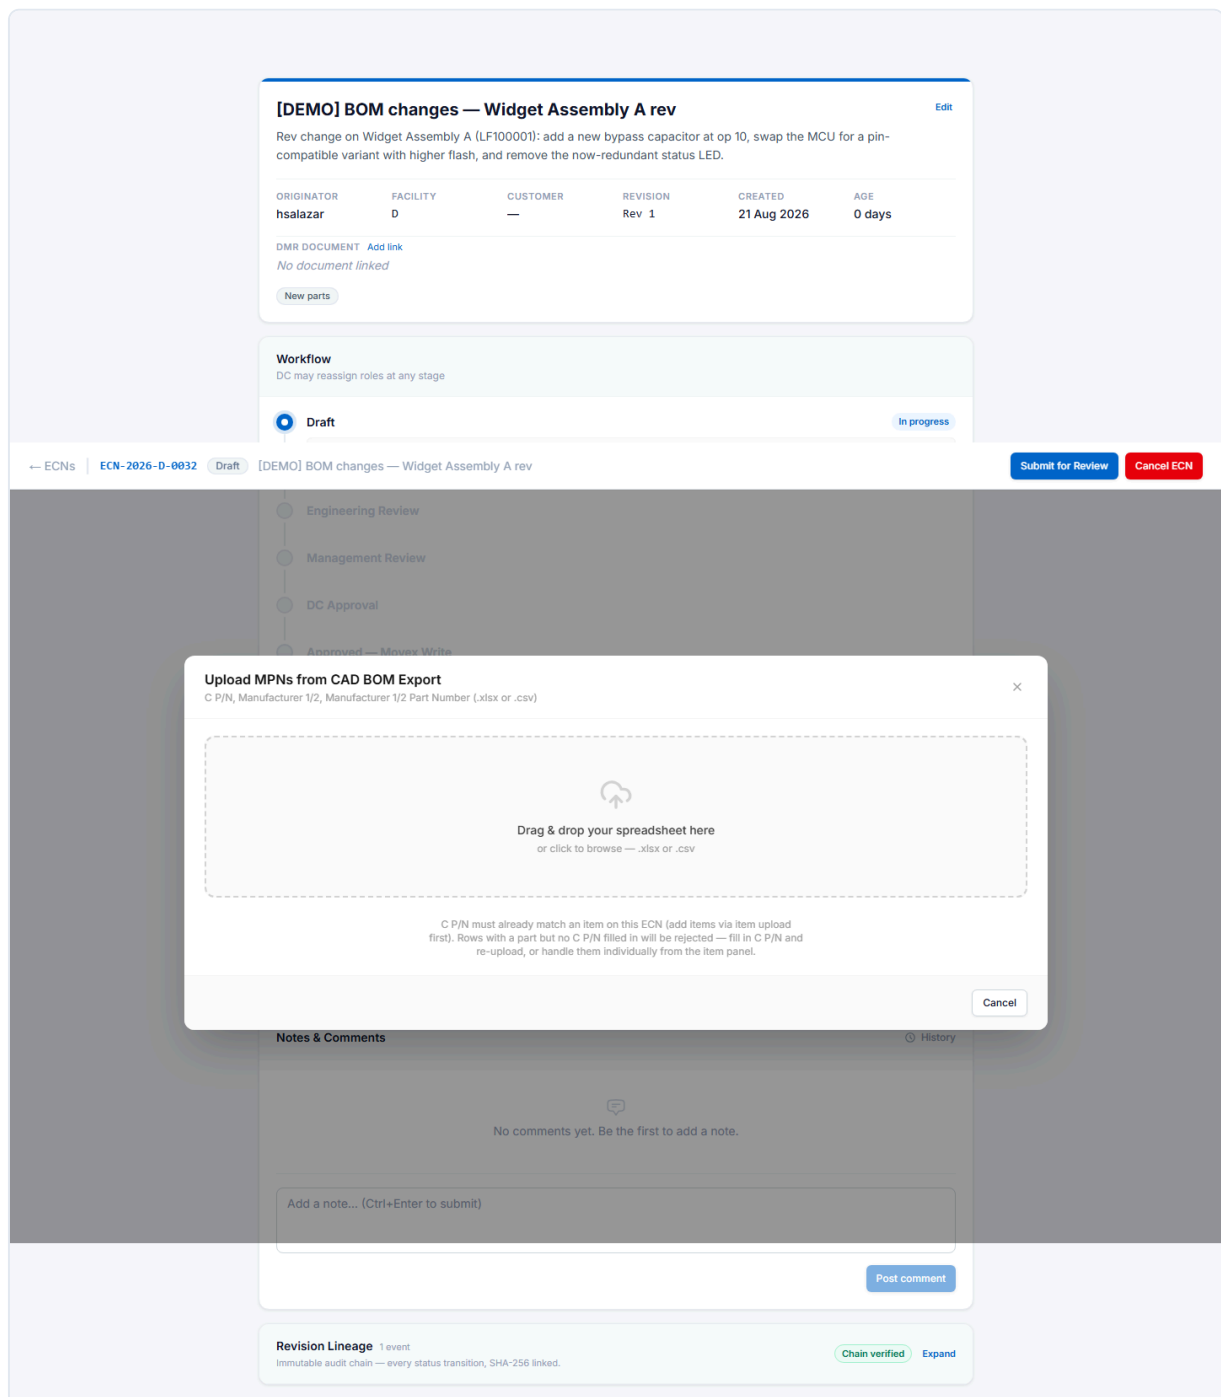

An upload drawer, showing the drop zone

1. Open the relevant tab on your ECN and click **Upload** ↑.
2. Drag your file onto the drop zone, or click to browse.
3. Oskar parses the file **in your browser** and shows you a preview — every row it read, with any problems marked per row.
4. Fix anything flagged, or confirm.

Nothing is saved until you confirm. If the preview looks wrong, close the drawer and nothing has changed.

File requirements

Formats	<code>.xlsx</code> or <code>.csv</code>
Maximum size	1 MB
Header row	Must be the first row
Column order	Doesn't matter — columns are matched by name
Capitalisation	Doesn't matter — <code>Item No</code> , <code>ITEM NO</code> and <code>item no</code> all work

Extra columns Oskar doesn't recognise are ignored, so you can upload a working spreadsheet with your own notes in it without stripping them out first. The MPN example file demonstrates this — it carries `Comment` , `Description` and `Designator` columns straight from a CAD export, and Oskar simply skips them.

Export is not a template

Every tab has an **Export** ↓ button as well as **Upload** ↑. It is natural to assume you can export, edit, and upload the file back. **You cannot.** The two formats are different, and the upload will be rejected.

For items, export gives you `Item Description` , `Drawing No` and `Is New Item` — but **omits four columns that upload requires**:

- `Item Status`
- `Order Type`
- `Lead Free Code`
- `Good Receiving Method`

For BOM changes, export writes `Operation No` where upload expects `Operation Number` .

Use export for reviewing and sharing. Use the example files in `templates/` for uploading.

Items

Adds or updates item master data. Start from `item-upload-example.csv` .

Required columns

Column	Max length
Item No	15
Item Name	30
Item Status	2
Procurement Group	3
Product Group	5
Order Type	10
Lead Free Code	10
Good Receiving Method	10

Optional columns

Column	Max length
Is New Item	— (yes/no)
Item Description	60
Drawing No	20
Item Group	4
Unit of Measurement	3
Revision No	—
Supplier	—
Responsible	—
Customer Alias	30

Over-length values are the most common upload error. **Item Name** in particular is only 30 characters — that is Movex's limit, not Oskar's. The item editor shows a live character counter for this reason.

Routing

Adds, changes or removes manufacturing operations. Start from `routing-upload-example.csv`.

Required columns: **Item No**, **Operation No**, **Operation Description**, **Work Centre**, **Run Time**, **Change Type**

Optional: Setup Time

Column	Max length	Notes
Item No	15	Must already be on the ECN — see below
Operation Description	30	
Work Centre	8	Work Center is also accepted
Change Type	—	ADD , UPDATE or DELETE

Two things to know:

- **Routing upload does not create items.** Every Item No must already exist on the ECN. Upload your items first, then your routing.
- **The ECN must be in Draft.** Once submitted, routing is locked.

The example file shows a realistic sequence — Kitting, Labelling, Prepping, SMT, X-Ray, ICT, Functional Test, QC, Packing — across two items in one upload. Note that operation numbers are spaced in tens, leaving room to insert steps later without renumbering.

BOM changes

Adds, changes or removes components within an assembly. Start from `bom-changes-upload-example.csv`.

Required columns: Item No , Component Number , Change Type

Column	Max length	Notes
Item No	15	The parent assembly. Does not have to be an item on the ECN — see below
Component Number	15	The part going into it
Change Type	—	ADD , CHANGE or DELETE

Optional: Quantity , Unit of Measure (max 3), Operation Number , Sequence Number , From Date , Old From Date , Old Quantity , Circuit Reference , Notes

CHANGE , not UPDATE . Routing uses UPDATE ; BOM changes use CHANGE . The two uploads genuinely differ here, and using the wrong word fails validation.

The parent does not need to be on the ECN. Unlike the routing and MPN uploads, a BOM-change row whose Item No is not an item on this ECN is accepted — the row stands on its own and is labelled **BOM only**. This means a BOM-change upload can be the *only* thing on an ECN. The parent must exist in Movex, which Oskar checks on upload.

CHANGE and **DELETE** need **Old From Date**. Oskar has to know which existing BOM line you mean, and the same component can appear more than once with different effective dates. Without it the row is rejected. The example file shows all three change types together, including a **CHANGE** row carrying both the old and the new quantity.

MPNs

Adds manufacturer part numbers to items. Start from `mpn-upload-example.csv`.

This upload takes the **CAD BOM export format** directly — the file your CAD tool already produces. You do not need to reshape it.

Required columns: `C P/N`, `Manufacturer 1`, `Manufacturer 1 Part Number`

Optional: `Manufacturer 2`, `Manufacturer 2 Part Number`

Column	Max length	Meaning
<code>C P/N</code>	15	The item number
<code>Manufacturer 1</code>	60	Primary manufacturer
<code>Manufacturer 1 Part Number</code>	30	Becomes the default MPN
<code>Manufacturer 2</code>	60	Alternate manufacturer
<code>Manufacturer 2 Part Number</code>	30	Becomes an alternate MPN

One row can become two MPN records. A line with both manufacturers filled in creates the primary (marked default for purchasing) and the alternate. A line with only Manufacturer 1 creates one. The example file has one of each: an op-amp with a single source, and a resistor with a Yageo primary and a Vishay alternate.

When an upload is rejected

The preview marks problems per row, so you can usually see immediately what to fix.

Message	What it means
Missing required column	A required header is absent or misspelled. Compare against the example file.
Could not parse the file	Not a valid <code>.xlsx</code> or <code>.csv</code> — often a <code>.xls</code> saved with the wrong extension.
File exceeds the 1 MB limit	Split it, or save as <code>.csv</code> , which is much smaller than <code>.xlsx</code> .
Unsupported content type	Upload <code>.xlsx</code> or <code>.csv</code> . Google Sheets and OpenDocument files need exporting first.
Duplicate row	The same key appears twice in your file. Oskar checks within the file as well as against the ECN.
Value too long	Over the max length for that column — see the tables above.

If a row is rejected and you can't see why, the row number in the preview matches the row number in your spreadsheet, counting the header as row 1.

Still stuck? See [When things go wrong](#).

Notifications

Oskar emails you when it needs something from you, and chases you if you don't respond. You do not have to keep checking the app.

All emails come from Oskar with a subject beginning **[OSKAR]**, so they are easy to filter into a folder — though see the warning at the end of this chapter before you do.

When you get an email

Email	Goes to	When
Action required	The person whose approval is needed	An ECN reaches a stage where you have to act
ECN rejected	The originator	A reviewer rejects it, with their reason included
Action overdue	The person who owes the action, and their Engineering Manager	48 hours after the action was assigned
URGENT — severely overdue	The Document Controller	96 hours, and only at Management Review
Open ECN summary	Document Controllers	Once a day

The overdue chase

Oskar checks every six hours for approvals that have been sitting too long.

At 48 hours, it emails the person who owes the action *and copies their Engineering Manager*. The email names the ECN, the stage, the role, and how many hours it has been waiting.

At 96 hours, if the ECN is at Management Review, the Document Controller is emailed as well.

Two things worth knowing:

- **Your manager is copied on the first chase, not the second.** The 48-hour email already goes to the EM. If you want to avoid your manager being emailed, respond within two working days.
 - **Because the check runs every six hours, an email arrives within six hours of the threshold**, not exactly on it. A 48-hour chase may land at 51 hours.
-

The daily summary

Document Controllers receive one email a day listing every open ECN for **their plant**: ECN number, title, status, originator, age in days, and who it is waiting on.

Melbourne DCs see only Melbourne ECNs; Johor Bahru DCs see only Johor Bahru ECNs. If you cover both plants you will receive two emails.

This is the replacement for the old nightly Stargile report.

What Oskar does not email you about

- **Approvals you are not required for.** If your role was skipped because the change scope didn't call for it, you hear nothing. That is intended, not an oversight.
 - **Observer roles.** R&D, Test Engineering and Manufacturing Quality are notified at defined points only, and are never asked to approve.
 - **Someone else's approval landing.** Only the person who owes the *next* action is told.
 - **Successful Movex writes.** Silence means it worked. Failures are surfaced to the Document Controller in the app.
-

If you are not getting emails

Oskar looks up your email address from Active Directory. **If your AD account has no email address recorded, Oskar skips the notification silently** — no error, no bounce, nothing in your inbox. From your side it simply looks as though the system never asked you.

The tell-tale sign is that you find out about ECNs waiting on you only by opening Oskar and seeing them in your list.

If that happens, **ask IT to check the `mail` attribute on your AD account**. This is not something you or the Document Controller can fix from inside Oskar.

Other things to check first:

- Look in your junk folder, and whether a rule is filing `[OSKAR]` mail somewhere you don't watch
 - Confirm with your DC that you are actually assigned to the role on that ECN — see [Access and onboarding](#)
-

A caution about filtering

It is tempting to file all `[OSKAR]` mail into a subfolder. Be careful: the overdue chase copies your Engineering Manager at 48 hours, so a filter that hides these from you does not hide them from your manager.

If you would rather work from the app than the inbox, use the **Require my action** card on the ECN list instead — see [Finding ECNs](#).

Finding ECNs

The ECN list is more capable than it first looks. Learning it properly is the difference between "where is that change?" taking ten seconds or ten minutes.

ACTIVE ECNS18Click to filter

REQUIRE MY ACTION9Click to filter

OVERDUE (>7 DAYS)11Click to filter

Q Search ECNs...

All statuses

All customers

All originators

All next actions

27 results

NUMBER	CUSTOMER	TITLE	CUST. ECN	STATUS	ORIGINATOR	NEXT ACTION	ENTRY DATE	AGE
ECN-2026-D-0013		[DEMO] BOM supersession —...	—	Approved	hsalazar	—	21 Aug 2026	8d
ECN-2026-D-0012		[DEMO] BOM changes —...	—	Draft	hsalazar	hsalazar	21 Aug 2026	8d
ECN-2026-D-0011		[DEMO] Phase 1 EOL compone...	—	Closed	hsalazar	—	21 Aug 2026	8d
ECN-2026-D-0010		[DEMO] Supplier change — T...	—	On Hold	hsalazar	—	21 Aug 2026	8d
ECN-2026-D-0029		[DEMO] Add conformal coat...	—	Rejected	hsalazar	hsalazar	21 Aug 2026	8d
ECN-2026-D-0028		[DEMO] BOM rationalisation —...	—	Moves Updated	hsalazar	—	21 Aug 2026	8d
ECN-2026-D-0027		[DEMO] Routing change —...	—	DC Approved	hsalazar	—	21 Aug 2026	8d
ECN-2026-D-0026		[DEMO] New IC — LM2596...	—	Mgmt Review	hsalazar	em_user, eng_user, gm_user	21 Aug 2026	8d
ECN-2026-D-0025		[DEMO] Replace connector J4...	—	Eng Review	hsalazar	—	21 Aug 2026	8d
ECN-2026-D-0024		[DEMO] SMT line capacitor...	—	Draft	hsalazar	hsalazar	21 Aug 2026	8d
ECN-2026-D-0023		[BOM] Testing	—	Draft	hsalazar	hsalazar	11 Aug 2026	18d
ECN-2026-D-0012		Bulk routing/MPN upload test	—	Draft	hsalazar	hsalazar	16 July 2026	36d
ECN-2026-D-0011		TESTING 140726	—	Eng Review	hsalazar	eng_user, brentko.polak	15 July 2026	37d
ECN-2026-D-0010		S9-6 Moves WRITE flow test	—	Moves Updated	hsalazar	dc_user	14 July 2026	38d
ECN-2026-D-0009		S9-6 Moves flow test	—	Moves Updated	hsalazar	dc_user	14 July 2026	38d
ECN-2026-D-0008		Testing ECN Flow	—	Draft	hsalazar	hsalazar	14 July 2026	38d
ECN-2026-D-0007		TESTING Routing Panel	—	Draft	hsalazar	hsalazar	10 July 2026	42d
ECN-2026-D-0006		Add component to BOM	—	Moves Updated	hsalazar	dc_user	25 June 2026	57d
ECN-2026-D-0005		BOM Update	—	Cancelled	eng_user	—	25 June 2026	57d
ECN-2026-D-0004		xxxxxxxxxxxx	—	Moves Updated	hsalazar	dc_user	23 June 2026	59d
ECN-2026-D-0003		aaaa	—	Mgmt Review	hsalazar	eng_user	18 June 2026	64d
ECN-2026-D-0002		Facility D verification	—	Moves Updated	hsalazar	dc_user	16 June 2026	66d
ECN-2026-D-0001		Facility D verification	—	Approved	hsalazar	—	16 June 2026	66d
ECN-2026-L-0011		aaaaaaaa	—	Draft	hsalazar	hsalazar	16 June 2026	66d
ECN-2026-L-0010		E2E test customer field	—	Draft	hsalazar	hsalazar	16 June 2026	66d
ECN-2026-L-0009		TEST	—	Eng Review	eng_user	eng_user, eng_user	28 May 2026	85d
ECN-2026-L-0001		Test ECN - Docker local stand...	—	Approved	hsalazar	—	19 May 2026	94d

The ECN list with stat cards, filters and results

(Customer names are blurred in this manual, not on the real screen.)

Start with the cards

The three cards are **toggles**, not just counters. Click one to filter; click again to clear.

Card	Shows
Active ECNs	Everything not Closed or Cancelled
Require my action	ECNs waiting on you specifically
Overdue (>7 days)	Open more than seven days, whoever they are waiting on

Require my action is the one to use daily. It answers "what do I need to do?" without opening anything.

Overdue counts from when the ECN was *raised*, not from when it arrived with the current person. An ECN eight days old that reached you yesterday still counts as overdue — it measures the change's total age, which is usually what matters to a customer waiting on it.

Terminal ECNs are never counted as overdue, however old.

Then narrow it down

Four dropdowns and a search box sit above the table. **They all combine**, so you can be quite specific in a couple of clicks.

Control	Filters on
Search ECNs...	ECN number and title
All statuses	A single workflow status
All customers	One customer
All originators	Who raised it
All next actions	Who it is waiting on

Useful combinations:

- **All next actions = your name** — same as the *Require my action* card, but you can add a status on top, e.g. only the ones sitting at Management Review.
- **Status = Approved** — ECNs mid-Movex-write. If any are more than a few minutes old, a write has probably failed. See [When things go wrong](#).
- **Status = Movex Updated** — changes already live in the ERP but not yet closed. For a Document Controller this is the "paperwork to finish" list.
- **Originator = someone on leave** — what to pick up while they are away.

The result count sits to the right of the filters, so you can see at a glance how much you have narrowed things.

Sorting

Click any column header carrying an arrow. **Entry date** and **Age** are the useful ones — oldest first shows what has been waiting longest.

Reading the table

Column	What it tells you
Number	ECN-2026-D-0026 — the D is Melbourne, L is Johor Bahru
Customer	Who the change is for, if customer-driven
Title	What the change is
Cust. ECN	The customer's own reference
Status	Where it is in the workflow
Originator	Who raised it
Next action	Who it is waiting on. Blank means nobody — finished or paused.
Entry date / Age	When raised, and how long open. Over a week turns red.

Next action is the most useful column on the screen. It is computed from the ECN's live state, not typed by anyone, so it cannot be stale. If it is blank on an open ECN, the ECN is either On Hold or waiting on the system rather than a person.

Finding a change after it is finished

Closed ECNs are kept permanently and remain searchable — just clear the **Active** filter, or set **Status = Closed**.

This is how you answer *"when did we change this, and who approved it?"*, which is exactly what an auditor asks.

Open the ECN and look at **Revision Lineage** at the bottom: every status change, who made it, when, and why. Click **Expand** for the full sequence. The **Chain verified** badge means the record has not been altered since it was written.

For a specific part rather than a specific ECN, the **BOM Browser** and **MPN Search** are usually the faster route — see [BOM tools](#).

Exporting

Each ECN's tabs have **Export** ↓ buttons for its items, routing, BOM changes and MPNs — useful for sharing a change with someone who does not use Oskar.

Two limits worth knowing:

- **Export format is not upload format.** You cannot export, edit and re-upload. See [Bulk uploads](#).
- **BOM change export is only available once the ECN reaches Movex Updated.** Before that the change is not final, and Oskar will not produce a document implying it is.

When things go wrong

Organised by symptom — find what you are seeing, not what you think is causing it.

Most entries end with "ask your Document Controller", and that is genuinely the right answer. The DC has recovery tools nobody else does.

I can't sign in

"Invalid username or password"

Check the obvious first: caps lock, and that you are using your **network** password, not an old Oskar-specific one. There isn't one — Oskar uses your Windows credentials.

If you are certain the password is right, the message can be misleading. Oskar reports some connection and configuration problems using the same wording, so a directory or network fault can look like a wrong password. If a colleague can sign in and you cannot, it is probably your account; if nobody can, it is not.

Ask IT if: you are sure the credentials are right, or several people are affected at once.

I'm signed in, but I can't see anything / can't do anything

You are authenticated but not authorised. Oskar hides actions you cannot take rather than greying them out, so a missing button and a missing permission look identical.

Ask IT to confirm you are in the right access groups. There are three, and which you need depends on your job — see [Access and onboarding](#).

A specific trap for **Document Controllers**: you need **two** groups. If you can DC-approve but get refused on ordinary approvals, that is exactly this.

There's no Approve button

In order of likelihood:

1. **You've already approved.** Check the Workflow panel — your row will say **approved**.
2. **You're not assigned to that role on this ECN.** Roles are assigned per ECN *and* per plant. The Melbourne QM is not automatically the Johor Bahru QM.
3. **You raised the ECN.** Self-approval is blocked and cannot be overridden.
4. **It isn't at your stage.** A Senior Engineer cannot approve at Management Review.

5. **Your step was skipped.** If the change scope didn't call for your role, your row says **skipped** and there is nothing to approve.

Ask your DC if: none of these fit. They can reassign roles on an ECN.

I got an email but there's nothing to do

Usually one of:

- **Someone else got there first.** On a parallel review another approver may have rejected the ECN after your email went out.
- **It's a notification, not a request.** Observers (R&D, Test Engineering, Manufacturing Quality) are told what happened; they are not asked to act.
- **The ECN moved on.** The chase email fires up to six hours after the threshold, so it can arrive just after you actioned it.

Open the ECN and read its status. If it says Closed or Rejected, no action is needed.

I'm not getting emails at all

This is the one to chase, because Oskar fails silently here.

Oskar takes your email address from Active Directory. If your AD account has no address recorded, **Oskar skips the notification without any error** — nothing bounces, nothing is logged where you would see it. From your side it just looks as though the system never asked you.

The tell-tale sign: you only discover ECNs waiting on you by opening Oskar and finding them.

Ask IT to check the `mail` attribute on your AD account. Neither you nor your DC can fix this from inside Oskar.

Before that, rule out the boring causes: junk folder, and any rule filing **[OSKAR]** mail into a folder you don't watch.

My upload was rejected

The preview marks problems per row, and the row numbers match your spreadsheet (counting the header as row 1).

Message	Cause
Missing required column	A required header is absent or misspelled — compare with the example files in templates/
"Could not parse the uploaded file"	Not a valid <code>.xlsx</code> or <code>.csv</code> . Often a <code>.xls</code> renamed, or a Google Sheets export
"The file contains no data rows"	Only a header row, or your data starts below a blank row
File exceeds the 1 MB limit	Split it, or save as <code>.csv</code> — much smaller than <code>.xlsx</code>
Duplicate row	The same key appears twice. Oskar checks within your file as well as against the ECN
Value too long	Over the column's maximum — <code>Item Name</code> is only 30 characters
"item_number ... was not found on this ECN"	The item isn't on the ECN yet. Upload items before routing or MPNs. Does not apply to BOM changes — those name their parent directly and no longer need an item
"Parent item ... does not exist in Movex"	A BOM change named a parent assembly Movex does not have. Check the number — this is the ERP being asked, not Oskar
"An ECN must have at least one item, routing operation, BOM change or MPN"	You tried to submit an empty ECN. Add content on one of the four tabs first

Do not export and re-upload. The export format is deliberately different from the upload format and will be rejected — see [Bulk uploads](#).

I can't edit my ECN any more

Once submitted, an ECN is locked. That is intended: reviewers must be able to trust that what they approved is what gets built.

You can edit again if it is **rejected** back to you.

For BOM changes specifically, the lock message is: *"BOM changes cannot be edited once the ECN has reached DC_APPROVED (DC role only)"* — after that point only the Document Controller can adjust them.

Need a change to a submitted ECN? Either ask a reviewer to reject it back to you, or ask the DC. Don't raise a duplicate ECN.

My ECN is stuck at "Approved"

"Approved" means the DC has released it and **Oskar is writing to Movex**. It should advance to "Movex Updated" within a few minutes, on its own.

If it hasn't after, say, fifteen minutes, a write has failed. Oskar retries automatically, but persistent failures need attention.

Tell your DC. They have **Admin** → **Movex Write Recovery**, which shows the failure and the error Movex returned, with a Retry button.

This is not a silent failure. Oskar knows the write didn't land and deliberately will not advance the ECN. What it cannot do is fix the cause.

My ECN is stuck at "Movex Updated"

This is not stuck — **it is waiting for a Document Controller to close it.** Nothing closes automatically.

The change is already live in Movex. Only the paperwork is open.

Ask your DC to close it, once any post-implementation checklist is done.

The BOM Browser says "No BOM found"

- **Check the item number** — they are case-sensitive and easy to mistype.
 - **Check the facility.** An item can exist at Melbourne and not Johor Bahru.
 - **The item may genuinely have no BOM.** A purchased component has no structure of its own.
 - **Movex may be unreachable.** If nothing at all returns a BOM, tell your DC.
-

"Where used" is empty

Usually correct rather than broken. A top-level assembly isn't a component of anything, so nothing uses it.

If you expected results for a component, check the facility, and whether the parent BOMs are still active — expired lines don't count as "used".

Something changed underneath my ECN

If someone else modified the same BOM lines between your submission and the DC's approval, Oskar detects it and shows the DC a conflict rather than silently overwriting.

You may be asked to review and resubmit. This is the system protecting your colleague's change and yours — in Stargile, the second change silently overwrote the first.

Who to ask

Problem	Who
Can't sign in; no buttons anywhere; not getting emails	IT
Stuck ECN; failed Movex write; need a role reassigned; need something unlocked	Your Document Controller
Whether a change needs an ECN at all; what scope to tick	Your Engineering Manager
Something in this manual is wrong or unclear	The Lead Engineer — please say so

When reporting a problem, include **the ECN number** and **what you were trying to do**. It saves a round trip.

Coming from Stargile

If you have raised ECNs in Stargile, most of what you know still applies. The *process* has not changed: someone raises a change, the right people review it, and it goes into Movex. What has changed is how much of that you have to do by hand.

This chapter is the fastest way in. Read it, then go to your role's chapter.

The five differences that matter most

1. One ECN covers everything

In Stargile you raised **separate ECNs** for items, routings, BOM changes and MPNs. A single real-world change routinely meant three or four ECNs to keep in step.

In Oskar, one ECN carries all four. The ECN detail screen has a tab for each, and they are approved together as one change.

Unlearn: don't raise a second ECN because your change touches both the BOM and the routing. Use the tabs.

2. It works in a normal browser

Stargile needed Internet Explorer 9. Oskar works in Chrome, Edge, Firefox and Safari, and it works on a laptop away from your desk.

3. Approvers are worked out for you

In Stargile you picked a distribution list by name, and there was nothing checking that the list you chose matched the boxes you had ticked. Choose the wrong list and the ECN went to the wrong people — silently.

In Oskar you tick what the change *affects*, and Oskar works out who has to approve from that. Tick "Routing / process change" and the Production Manager is added automatically.

Unlearn: you no longer choose your approvers. If you think the wrong people were added, the fix is to correct the change scope, not to reassign the list.

4. Movex is written for you

In Stargile you created the item in Movex yourself, then raised the ECN to record that you had. The ECN was paperwork *after* the fact.

In Oskar the ECN is the mechanism. When the Document Controller approves, **Oskar writes the change into Movex** — items, BOM lines, routing operations, MPN aliases. You do not re-key anything, and the two can't drift apart.

Unlearn: do not create the item in Movex first. Raise the ECN and let it do the write.

5. Two people can't quietly overwrite each other

In Stargile, two ECNs against the same part number would both go through, and the second silently overwrote the first.

Oskar takes a snapshot of the BOM when you submit, and re-checks it at the Document Controller's gate. If someone else changed the same lines in between, the DC is shown the conflict and has to resolve it before anything is written.

Also fixed

- **BOM changes don't need an item on the ECN.** As in Stargile, a BOM change names its parent assembly directly, so an ECN that revises only a structure needs no items at all. An earlier version of Oskar required a parent item row, which meant adding a dummy item that made it look like the item master was changing — this now matches how Stargile always worked. Oskar does enforce the rule Stargile actually had: the parent must exist in Movex.
- **BOM upload no longer accepts duplicate sequence numbers.** Stargile took them and corrupted the data; Oskar rejects the file and tells you which row.
- **No currency field on MPN uploads.** It was mandatory in Stargile and never used. It's gone.
- **Manufacturer name only.** Stargile wanted both a manufacturer code and a name. Oskar needs the name.
- **You can't upload to a finished ECN.** Stargile let you add items to a completed ECN, where they quietly went nowhere.

Terminology

Stargile	Oskar
ECN status numbers (13 of them)	10 statuses with plain-English names — see the Glossary
Distribution list	Change scope — you tick what the change affects, Oskar picks the people
DMR path typed as text	Attachments on the ECN itself
Separate item / route / BOM / MPN ECNs	One ECN, four tabs

What has genuinely gone away

Some Stargile habits have no Oskar equivalent because the underlying problem was removed:

- **Typing DMR paths.** Files attach to the ECN.

- **Manually keeping parallel ECNs in step.** There is only one.
 - **Checking Movex afterwards to see whether your change landed.** Oskar shows you the write status, and tells the DC if it failed.
-

What is not in Oskar yet

Being straight about the gaps, so you're not hunting for something that isn't there:

- **Transmittals and document distribution** are not yet in Oskar. Continue as you do today.
- **MTS upload** is unchanged — Oskar does not push to MTS.
- **MPN purge / end-dating** is not automated.

If your work depends on any of these, raise it — knowing which gaps hurt most is how they get prioritised.

The switchover

Oskar and Stargile will not run side by side. The plan is:

1. **A two-week drain.** Finish the ECNs you have open in Stargile. Don't start new ones there.
2. **Cutover day.** Stargile goes read-only. Every new ECN is raised in Oskar.
3. **Anything still open in Stargile** is either completed there or cancelled and re-raised in Oskar. Nothing is migrated mid-workflow — a half-approved ECN cannot be moved across without losing the approvals already given.

Your closed Stargile records remain available for audit. They are not being deleted.

During the drain, get an Oskar login and raise one practice ECN. Ten minutes then is worth more than an hour of reading on cutover day.

Where to go next

You are	Read
An engineer raising changes	Raising an ECN
An approver	Approving an ECN
A Document Controller	The Document Controller

If you can't sign in on day one, that's an access question, not an Oskar question — see [Access and onboarding](#).

Access and onboarding

How people get into Oskar, and what to do when someone joins, changes role, or leaves.

This chapter is for **new starters** who cannot sign in, **Document Controllers** diagnosing why a colleague has no buttons, and **IT** setting accounts up.

There is no Oskar password

Oskar uses your **normal network credentials** — the same username and password as Windows. There is nothing separate to set up, remember or reset.

If your network password changes, Oskar follows automatically.

Two things control what you can do

This is the single most useful idea in this chapter, and the source of most confusion.

	Set by	Controls	Where
Access group	IT	Whether you can sign in, and broadly what kind of thing you can do	Active Directory
Role assignment	Document Controller	Whether <i>you</i> are asked on <i>this</i> ECN, at <i>this</i> plant	Oskar, Admin → ECN Role Assignments

Both must be right. They fail in different, easily-confused ways:

- Wrong access group → you sign in but see no buttons anywhere, on every ECN
- Missing role assignment → everything looks normal, but you are never asked to do anything

If a colleague says "Oskar isn't working", establishing which of these it is takes about ten seconds and saves a lot of guessing.

The three access groups

Group	Gives you
<code>ecn-initiator</code>	Raise ECNs, view items and BOMs
<code>ecn-approver</code>	Action approval steps
<code>ecn-doc-controller</code>	The Document Controller gate

You can hold more than one. An engineering manager who raises changes *and* approves them needs both `ecn-initiator` and `ecn-approver`.

⚠ Document Controllers need two groups

`ecn-doc-controller` does **not** include `ecn-approver`. Oskar checks them independently.

A Document Controller with only the DC group can pass the DC gate but is **rejected on ordinary approvals**. It looks like a bug and is not — it is a missing group membership.

This is the most common access misconfiguration. If you are setting up a DC, add both.

How you get into a group

You do not usually get added to `ecn-initiator` or `ecn-approver` individually. Instead they are granted through the group that reflects your **job** — engineering, quality, production, and so on.

The practical consequence: **Oskar access arrives with normal onboarding**. A new quality manager gets ECN approval rights as part of being set up as a quality manager, with no separate Oskar request. When someone leaves, removing their normal access removes Oskar too.

`ecn-doc-controller` is the exception and is granted directly, because Document Controller is a duty within the ECN process rather than a job title.

New starter checklist

For whoever is onboarding someone into an ECN-facing role:

- 1. IT — access** - Confirm they are in the right access group(s) for their job - For a Document Controller, confirm **both** `ecn-doc-controller` and `ecn-approver` - **Confirm their email address is recorded in Active Directory**. Without it Oskar silently sends them nothing — see below
- 2. Document Controller — role assignment** - Add them in **Admin → ECN Role Assignments**, under their role - **Pick the right facility**. Melbourne (`D`) and Johor Bahru (`L`) are separate. Someone covering both must be added twice. - Decide whether they are the default assignee. **The first person listed for a role at a facility is the default**; later entries are backups.

3. **Them — orientation** - [Getting started](#), then their role's chapter - If they used Stargile, [Coming from Stargile](#) first

The email address is not optional

Oskar reads your email address from Active Directory. **If it is missing, Oskar skips your notifications entirely** — no error, no bounce, nothing anywhere you would see it.

The person simply never hears that an ECN is waiting on them, and finds out only by opening Oskar.

There is no way to fix this from inside Oskar. **Ask IT to check the `mail` attribute on the account.** It is worth confirming during onboarding rather than discovering it when an ECN has sat untouched for a week.

When someone changes role

Both halves need attention:

- **IT** — update their access groups if the new role needs different ones
- **Document Controller** — remove them from their old role in Admin, add them to the new one

Removing them from a role does not affect ECNs already in flight, and never erases past approvals, which stay in the audit trail permanently.

When someone leaves

Do the role assignment removal, not just the AD one. Disabling the AD account stops them signing in, but their name stays on the Oskar roster — and if they were the *default* assignee for a role, new ECNs will keep being assigned to someone who cannot act.

The damaging case is Document Controllers. If the only DC for a plant leaves and is not replaced in Admin, **every ECN at that plant stalls at the DC gate** with nobody able to approve. There is no warning; ECNs simply stop moving.

Checklist:

1. IT disables the account
 2. DC removes them from every role in **Admin → ECN Role Assignments**
 3. DC checks each role they held still has someone — especially at their facility
 4. DC reassigns any in-flight ECN currently waiting on them
-

Diagnosing an access problem

Symptom	Likely cause	Who fixes it
Can't sign in at all	Network credentials, or no access group	IT
Signs in, no buttons anywhere	Not in any <code>ecn-*</code> group	IT
Can DC-approve but not approve normally	Missing <code>ecn-approver</code> alongside <code>ecn-doc-controller</code>	IT
Everything looks normal, never asked to do anything	Not on the role roster, or wrong facility	Document Controller
Assigned to ECNs but gets no emails	Missing <code>mail</code> attribute in AD	IT
Was fine, now isn't	Group membership changed, or removed from a role	Check both

Document Controllers can check the first three themselves: Admin → Active Directory Groups shows who is in each group, read live. That tells you whether it is an IT problem or yours before you raise a ticket.

What Oskar deliberately will not do

- **Let you approve your own ECN**, however senior you are or how many roles you hold
- **Grant access by role assignment alone** — being on the roster does not let you sign in
- **Tell an unauthenticated visitor anything** about whether a username exists

These are quality and security requirements, not settings.