
Phase 2 & 3 Specifications

Phase 3 – Event Processing

- Phase three introduces event processing into the scale ecosystem.
- Events are triggered by an Event Controller and/or a specified time.
- Events are processed by HTTP REST services with a formatted request and response bodies.
- Event URLs are obtained by the Event Controller service response and/or configuration file stored in the scale.
- Event request and response bodies are predefined and specific for each event.
- Each event will perform specific scale tasks based on the HTTP Response body attributes.
- All request and response data payloads will use JSON format

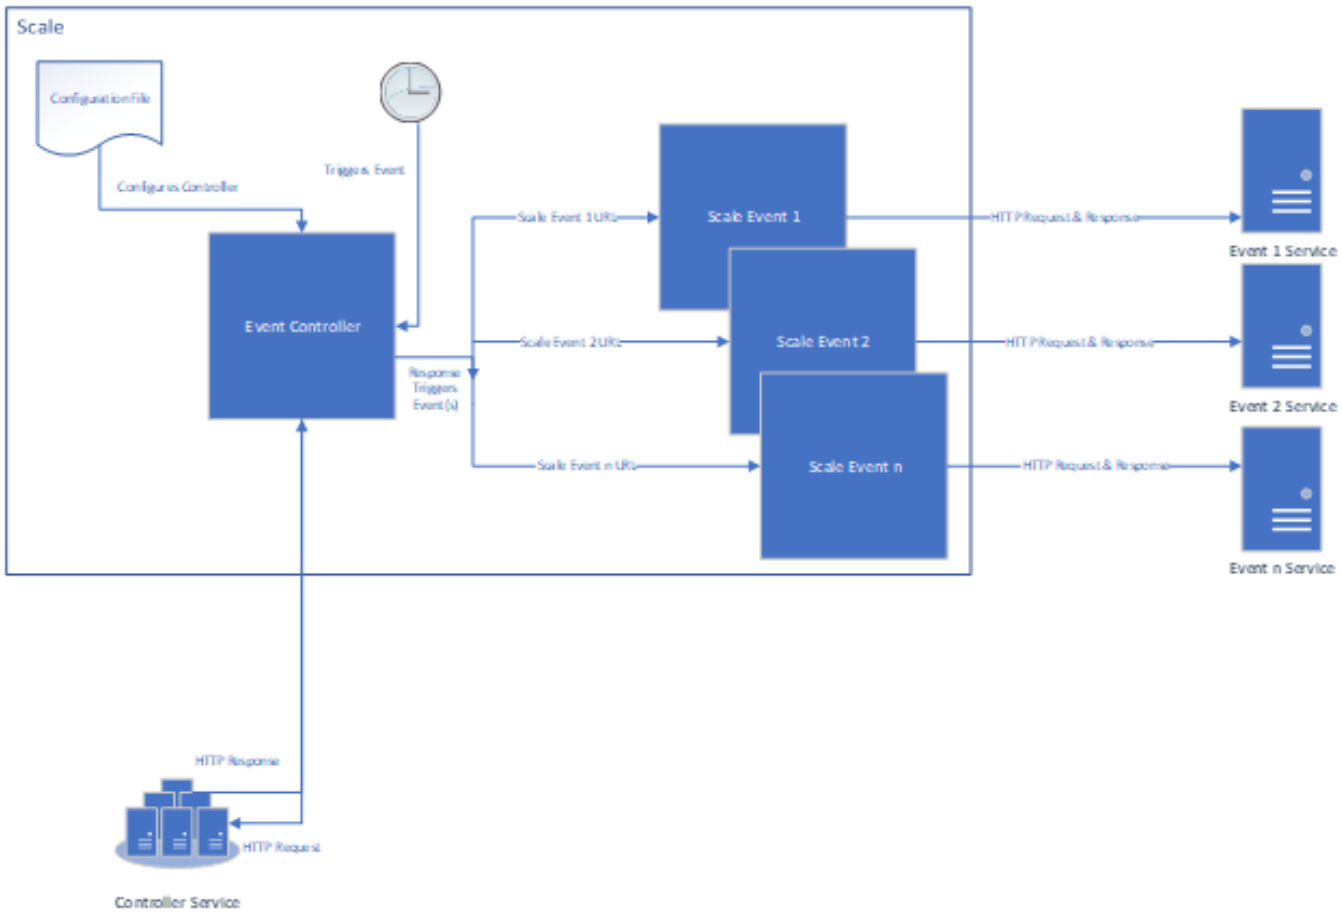

Event Controller (aka Health Check)

- The Event Controller is responsible for calling the Controller Service with a request payload.
- The Controller Service processes the request, formulates and sends a response back with details on what Scale Events should be triggered.
- The Event Controller Service base URL and the CRON job configurations are stored in the configuration file.
- Parameters: (NONE)
- Request Header

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Event Controller Request
{

```
"SerialNumber": 451155881,
"StoreNumber": 337,
"CountryCode": "US",
"ScaleVendor": "HOBART",
"ScaleModel": "HTi-LH",
"RequestUuid": "32e0b3eb-0d71-11eb-8b79-fa163e078af2",
"RequestTriggerType": "WAS_OFFLINE, SCALE_POWER_UP, SCALE_POWER_DOWN, INTERVAL, MANUAL",
"RequestTimestamp": "2020-10-13T09:46:00-05:00",
"ConfigUuid": "ab666a03-0e26-11eb-8b79-fa163e078af2",
"LastRebootTimestamp": "2020-10-13T09:04:14-05:00",
"LastCommunicationTimestamp": "2020-10-13T09:58:17-05:00",
"LastItemChangeReceivedTimestamp": "2020-10-12T20:45:57-05:00",
"Settings": {
  "ScaleMode": "MANUAL",
  "ScaleItemEntryType": "PRODUCTION_ENTRY",
  "LabelStock": "Continuous",
  "HasLoadCell": false,
  "WeigherPrecision": "12 x 0.005 lb",
  "WeigherCalibratedTimestamp": "2020-03-25T14:32:22-05:00",
  "WeigherConfiguredTimestamp": "2020-03-25T14:33:00-05:00",
  "HasCustomerDisplay": false,
  "Timezone": "America/Chicago",
  "TimeKeeper": "NTP",
  "Ntp": {
    "Server": "0.0.0.0",
    "Frequency": 0,
    "DayOfWeek": 0,
    "TimeOfDay": "03:30:00",
    "TimeZone": "America/Chicago",
    "AntiMeridian": "AM"
  },
  "Network": {
    "HostName": "SCALE12S00337US",
    "ConnectionType": "Wired",
    "ConnectionSpeed": "negotiated 100base Tx-FD",
    "Wired": {
      "MacAddress": "00:02:6B:18:C9:9D"
    },
    "Wireless": {
      "MacAddress": "28:24:FF:45:A9:20",
      "Channel": "Auto : Roaming",
      "LinkRate": "Automatic",
      "SignalStrength": "51% -71dBm",
      "Adapter": {
        "Ssid": "Walmartwifi",
        "SecurityMethod": "OPEN",
        "Encryption": "WEP"
      },
      "Authentication": {
        "DefaultKey": 1,
        "Key1": null,
        "Key2": null,
        "Key3": null,
        "Key4": null
      }
    },
    "IpConfig": {
      "IsStatic": true,
      "DhcpServer": null,
      "IpAddress": "55.42.136.76",
      "SubnetMask": "255.255.255.0",
      "Gateway": "55.42.136.1"
    },
    "Dns": {
      "AutoDns": false,
      "DnsServer1": "55.42.136.129",
      "DnsServer2": null,
      "DnsServer3": null,
      "DnsSuffix1": "s00337.us.wal-mart.com",
      "DnsSuffix2": "wal-mart.com",
      "DnsSuffix3": null,
```

```
        "DnsSuffix4": null,
        "DnsSuffix5": null,
        "DnsSuffix6": null
      }
    },
    "Snmp": {
      "IsEnbaled": false,
      "VariablesPort": 161,
      "TrapsIp": null,
      "TrapsPort": 162
    }
  },
  "Firmware": {
    "BuildNumber": "hte-3.3.162-04042020_144057",
    "Application": "3.3.162",
    "OperatingSystem": "3.14.52-1.1.0-hobart-3.0.0-gc488e3d",
    "SystemController": 2.3,
    "Loader": "3.5.0",
    "PeripheralController": 4.7,
    "SmBackend": "3.3.3",
    "Features": [
      "OFFICE_VIEWER",
      "FBVNC",
      "RDP",
      "WM_CAKE_LABELLIC",
      "PDF_VIEWER",
      "BLUEZ",
      "WALMART",
      "WPASUPPLICANT"
    ],
    "Licenses": [
      "WalMart\nWAL-MART STORES INC.\nBENTONVILLE, AR 72716\nProducts:
\nSCALE_PDF_VIEWER\nSCALE_REMOTE_MONITOR\nSCALE_FPP\nType: USB_SERIAL_NUMBER\nAllotment: 1\nKey:
00F67C49BCF5A88AB2BE0B4B4A3EF2CA49B1E27E",
      "SPENCER STOKES\nWAL-MART INC.\n805 MOBERLY LANE\nProducts:\nSCALE_REMOTE_PRINTING\nType:
USB_SERIAL_NUMBER\nAllotment: 1\nKey: 023FC05B7B392D98DAAEFFA390801342007A95F0"
    ]
  },
  "Peripherals": [
    {
      "Description": "Weigher",
      "Type": "APC",
      "SoftwareVersion": "6.0.104",
      "HardwareVersion": 1
    },
    {
      "Description": "Primary Printer",
      "Type": "APC",
      "SoftwareVersion": 6,
      "HardwareVersion": 1
    },
    {
      "Description": "Graphical Customer Display",
      "Type": "Unknown",
      "SoftwareVersion": 3.3,
      "HardwareVersion": 0
    }
  ],
  "Disk": {
    "Size": 12345678901234567000,
    "Used": 1,
    "Free": 12345678901234567000
  },
  "Labels": [
    {
      "LabelNumber": 100,
      "Version": "2.0"
    },
    {
      "LabelNumber": 201,
      "Version": "N/A"
```

```
    },
    {
      "LabelNumber": 300,
      "Version": "1"
    },
    {
      "LabelNumber": 301,
      "Version": "rev2"
    }
  ],
  "PluRecordCount": 611,
  "BlockedPlus": [
    989,
    60477,
    60478
  ],
  "LastFetchPluOffsetTimestamp": "2020-10-13T14:46:13Z",
  "UsageToday": {
    "CakePrints": 4,
    "PluPrints": [
      {
        "PluNbr": 989,
        "ManualPrints": 1,
        "RemotePrints": 2
      },
      {
        "PluNbr": 122,
        "ManualPrints": 0,
        "RemotePrints": 7
      }
    ]
  }
}
```

- Response Header: (NONE)
- Response Body:
    - NOTE: Checksum values are *SHA-256* encoded.

Event Controller Response

```
{
  "SerialNumber": 451155881,
  "StoreNumber": 337,
  "CountryCode": "US",
  "ScaleVendor": "HOBART",
  "ScaleModel": "HTi-LH",
  "ResponseUuid": "32e0b3eb-0d71-11eb-8b79-fa163e078af2",
  "ResponseTimestamp": "2020-10-13T15:46:01Z",
  "Events": [
    {
      "Event": "UPDATE_CONFIGURATION",
      "Uuid": "91421949-0d9e-11eb-8b79-fa163e078af2",
      "Url": "https://example.wal-mart.com/v1/UpdateConfiguration",
      "AlwaysEnabled": true,
      "CallbackUrl": null,
      "Metadata": {}
    },
    {
      "Event": "APPLY_SETTINGS",
      "Uuid": "9fd4991d-0d9e-11eb-8b79-fa163e078af2",
      "Url": "https://example.wal-mart.com/v1/ApplySettings?rebootFlg=true",
      "AlwaysEnabled": false,
      "CallbackUrl": "https://example.wal-mart.com/v1/Callback",
      "Metadata": {}
    },
    {
```

```
  "Event": "FETCH_PLU",
  "Uuid": "ac0cbfef-0d9e-11eb-8b79-fa163e078af2",
  "Url": "https://example.wal-mart.com/v1/FetchPlu?offsetTimestamp=2020-10-13T14:46:13Z",
  "AlwaysEnabled": false,
  "CallbackUrl": null,
  "Metadata": {}
},
{
  "Event": "UPGRADE_FIRMWARE",
  "Uuid": "b9c70a2f-0d9e-11eb-8b79-fa163e078af2",
  "Url": "https://example.wal-mart.com/v1/UpgradeFirmware?fileName=",
  "AlwaysEnabled": false,
  "CallbackUrl": "https://example.wal-mart.com/v1/Callback",
  "Metadata": {
    "FirmwareName": "HOBART-3.3.162-04072020_0935",
    "PackageFileName": "hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz",
    "FirmwareSize": 12345678901234568,
    "CheckSum": "8fceac7c39dac0ae2ea654eee095ba32e",
    "Files": [
      {
        "FileName": "hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz.partaa",
        "FileSize": 10000,
        "FileCheckSum": "8fceac..",
        "FileSequenceNbr": 1
      },
      {
        "FileName": "hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz.partab",
        "FileSize": 10000,
        "FileCheckSum": "8fceac..",
        "FileSequenceNbr": 2
      },
      {
        "FileName": "hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz.partac",
        "FileSize": 1234,
        "FileCheckSum": "8fceac..",
        "FileSequenceNbr": 3
      }
    ]
  }
},
{
  "Event": "INSTALL_FEATURE",
  "Uuid": "c0df9ef6-0d9e-11eb-8b79-fa163e078af2",
  "Url": "https://example.wal-mart.com/v1/InstallFeature/CustomerDisplay.ht",
  "AlwaysEnabled": false,
  "CallbackUrl": "https://example.wal-mart.com/v1/Callback",
  "Metadata": {}
},
{
  "Event": "INSTALL_FEATURE",
  "Uuid": "0ba88aee-5ce2-11eb-998a-fa163e138193",
  "Url": "https://example.wal-mart.com/v1/InstallFeature/SomeFeatureFile.ht",
  "AlwaysEnabled": false,
  "CallbackUrl": "https://example.wal-mart.com/v1/Callback",
  "Metadata": {}
},
{
  "Event": "INSTALL_FEATURE",
  "Uuid": "26a8e70b-5ce2-11eb-998a-fa163e138193",
  "Url": "https://example.wal-mart.com/v1/InstallFeature/SomeFeautreFile2.ht",
  "AlwaysEnabled": false,
  "CallbackUrl": "https://example.wal-mart.com/v1/Callback",
  "Metadata": {}
},
{
  "Event": "LOAD_LABELS",
  "Uuid": "cbfd7217-0d9e-11eb-8b79-fa163e078af2",
  "Url": "https://example.wal-mart.com/v1/LoadLabels?fileName=",
  "AlwaysEnabled": false,
  "CallbackUrl": null,
  "Metadata": {
```

```
        "LabelTemplateSetName": "US-WM-HOB-HTI-DELI_20210122",
        "Files": [
          {
            "FileName": "UW-WM-HOB-HTI-DELI_20210122-103.ht",
            "FileSize": 13,
            "FileCheckSum": "8fceac.."
          },
          {
            "FileName": "US-WM-HOB-HTI-DELI_20210122-203.ht",
            "FileSize": 1234,
            "FileCheckSum": "8fceac.."
          },
          {
            "FileName": "US-WM-HOB-HTI-DELI_20210122-603.ht",
            "FileSize": 1234,
            "FileCheckSum": "8fceac.."
          }
        ]
      }
    }
  ]
}
```

Configuration File

- Contains attributes that configures the Event Controller

Event Controller Configuration

```
Config:
   Uuid: "ab666a03-0e26-11eb-8b79-fa163e078af2"

Scale:
   SerialNumber: 451155881
   Vendor: "HOBART"
   Model: "HTi-LH"

Site:
   StoreNumber: 337
   CountryCode: "US"
   ScaleNbr: 12
   LocationDeptNbr: 98

OfflineDialogs:
   MessageFade: 5
   FirstOfflineMessage:
      Start: 120
      Stop: 72
      Frequency: 60
   SecondOfflineMessage:
      Start: 72
      Stop: 24
      Frequency: 30
   FirstPrintingMessage:
      Start: 144
      Stop: 120
   SecondPrintingMessage:
      Start: 24
      Stop: 0

EventController:
   Url: "https://example.wal-mart.com/v1/EventController"
   Triggers:
      OnInterval: true
      OnStartup: true
      OnShutdown: true
      OnReconnect: true
      ReconnectOffset: 0
   TimerInterval: 0 */1 * * *
   Events:
      ChangeConfiguration: true
      ApplyScaleSettings: true
      FetchPlu: true
      UpgradeFirmware: true
      InstallFeature: true
      LoadLabel: true
      CaptureMetrics: true
```

Scale Events:

1) Change Configuration Event & Initialize Scale Event

- When this event is triggered, it calls a service that retrieves and persists Configuration File details and applies changes.
- Parameters:
    - initializeScaleFlg
        - True/False
        - Optional
        - Default = False
        - Examples
            - ?initializeScaleFlg=true

        - ?initializeScaleFlg=false
        - <No Parameters> defaults to false
- When the 'initializeScaleFlg' parameter is set to true will cause the following events to be dispatched on the next health-check event trigger.
    - UPDATE CONFIGURATION
    - APPLY SETTINGS
    - FETCH PLU (Full Load)
    - INSTALL FEATURE (All applicable features)
    - LOAD LABELS (All applicable labels)
    - UPGRADE FIRMWARE (If needed)

- Request Header:

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Configuration Event Request

```
{
  "SerialNumber": 451155881,
  "StoreNumber": 337,
  "CountryCode": "US",
  "ScaleIpAddress": "55.42.136.76",
  "ScaleVendor": "HOBART",
  "ScaleModel": "HTi-LH",
  "RequestUuid": "91421949-0d9e-11eb-8b79-fa163e078af2",
  "RequestTimestamp": "2020-10-14T10:13:00-05:00",
  "ConfigTimestamp": "2020-10-14T09:14:44-05:00",
  "CurrentConfiuration": {
    "Config": {
      "Uuid": "ab666a03-0e26-11eb-8b79-fa163e078af2"
    },
    "Scale": {
      "SerialNumber": 451155881,
      "Vendor": "HOBART",
      "Model": "HTi-LH"
    },
    "Site": {
      "StoreNumber": 337,
      "CountryCode": "US",
          "ScaleNbr": 12,
      "LocationDeptNbr": 98
    },
    "OfflineDialogs": {
      "MessageFade": 5,
      "FirstOfflineMessage": {
        "Start": 120,
        "Stop": 72,
        "Frequency": 60
      },
      "SecondOfflineMessage": {
        "Start": 72,
        "Stop": 24,
        "Frequency": 30
      },
      "FirstPrintingMessage": {
        "Start": 144,
        "Stop": 120
      },
      "SecondPrintingMessage": {
        "Start": 24,
        "Stop": 0
      }
    },
    "EventController ": {
      "Url": "https://example.wal-mart.com/v1/EventController",
      "Triggers": {
        "OnInterval": true,
        "OnStartup": true,
        "OnShutdown": true,
        "OnReconnect": true,
        "ReconnectOffset": 0
      },
      "TimerInterval": "0 */1 * * *",
      "Events": {
        "ChangeConfiguration": true,
        "ApplyScaleSettings": true,
        "FetchPlu": true,
        "UpgradeFirmware": true,
        "InstallFeature": true,
        "LoadLabel": true,
        "CaptureMetrics": true
      }
    }
  }
}
```

- Response Header: (NONE)
- Response Body:

Configuration Event Response


```
{
   "ResponseUuid": "91421949-0d9e-11eb-8b79-fa163e078af2",
   "ResponseTimestamp": "2020-10-14T15:13:01Z",
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "NewConfiuration": {
      "Config": {
         "Uuid": "f198db33-0e33-11eb-b25f-fa163e078af2"
      },
      "Scale": {
         "SerialNumber": 451155881,
         "Vendor": "HOBART",
         "Model": "HTi-LH"
      },
      "Site": {
         "StoreNumber": 337,
         "CountryCode": "US",
             "ScaleNbr": 12,
         "LocationDeptNbr": 98
      },
      "OfflineDialogs": {
        "MessageFade": 5,
        "FirstOfflineMessage": {
          "Start": 120,
          "Stop": 72,
          "Frequency": 60
        },
        "SecondOfflineMessage": {
          "Start": 72,
          "Stop": 24,
          "Frequency": 30
        },
        "FirstPrintingMessage": {
          "Start": 144,
          "Stop": 120
          },
        "SecondPrintingMessage": {
          "Start": 24,
          "Stop": 0
        }
      },
      "EventController": {
         "Url": "https://example.wal-mart.com/v1/EventController",
         "Triggers": {
            "OnInterval": true,
            "OnStartup": true,
            "OnShutdown": true,
            "OnReconnect": true,
            "ReconnectOffset": 0
         },
         "TimerInterval": "0 */1 * * *",
         "Events": {
            "ChangeConfiguration": true,
            "ApplyScaleSettings": true,
            "FetchPlu": true,
            "UpgradeFirmware": true,
            "InstallFeature": true,
            "LoadLabel": true,
            "CaptureMetrics": true
         }
      }
   }
}
```

2) Apply Scale Settings Event

- When this event is triggered, it calls a service that retrieves changes in configurable scale settings and applies those changes.
- Parameters:
    - rebootFlg
        - True/False
        - Optional
        - Default = False
        - Examples
            - ?rebootFlg=true
            - ?rebootFlg=false
            - <No Parameters> defaults to false
- Request Header

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Apply Scale Settings Event Request


```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "9fd4991d-0d9e-11eb-8b79-fa163e078af2",
   "RequestTimestamp": "2020-10-14T11:48:00-05:00",
   "CurrentSettings": {
      "ScaleMode": "MANUAL",
      "ScaleItemEntryType": "PRODUCTION_ENTRY",
      "LabelStock": "Continuous",
      "HasLoadCell": false,
      "WeigherPrecision": "12 x 0.005 lb",
      "WeigherCalibratedTimestamp": "2020-03-25T14:32:22-05:00",
      "WeigherConfiguredTimestamp": "2020-03-25T14:33:00-05:00",
      "HasCustomerDisplay": false,
      "Timezone": "America/Chicago",
      "TimeKeeper": "NTP",
      "Ntp": {
         "Server": "0.0.0.0",
         "Frequency": 0,
         "DayOfWeek": 0,
         "TimeOfDay": "03:30:00",
         "TimeZone": "America/Chicago",
         "AntiMeridian": "AM"
      },
      "Network": {
         "HostName": "SCALE12S00337US",
         "ConnectionType": "Wired",
         "ConnectionSpeed": "negotiated 100base Tx-FD",
         "Wired": {
            "MacAddress": "00:02:6B:18:C9:9D"
         },
         "Wireless": {
            "MacAddress": "28:24:FF:45:A9:20",
            "Channel": "Auto : Roaming",
            "LinkRate": "Automatic",
            "SignalStrength": "51% -71dBm",
            "Adapter": {
               "Ssid": "Walmartwifi",
               "SecurityMethod": "OPEN",
               "Encryption": "WEP"
```

```
            },
            "Authentication": {
               "DefaultKey": 1,
               "Key1": null,
               "Key2": null,
               "Key3": null,
               "Key4": null
            }
         },
         "IpConfig": {
            "IsStatic": true,
            "DhcpServer": null,
            "IpAddress": "55.42.136.76",
            "SubnetMask": "255.255.255.0",
            "Gateway": "55.42.136.1"
         },
         "Dns": {
            "AutoDns": false,
            "DnsServer1": "55.42.136.129",
            "DnsServer2": null,
            "DnsServer3": null,
            "DnsSuffix1": "s00337.us.wal-mart.com",
            "DnsSuffix2": "wal-mart.com",
            "DnsSuffix3": null,
            "DnsSuffix4": null,
            "DnsSuffix5": null,
            "DnsSuffix6": null
         }
      },
      "Snmp": {
         "IsEnbaled": false,
         "VariablesPort": 161,
         "TrapsIp": null,
         "TrapsPort": 162
      }
   }
}
```


- Response Header: (NONE)
- Response Body:

Apply Settings Event Response

```
{
   "ResponseUuid": "9fd4991d-0d9e-11eb-8b79-fa163e078af2",
   "ResponseTimestamp": "2020-10-14T16:48:01Z",
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RebootScale": true,
   "NewSettings": {
      "Timezone": "America/Chicago",
      "TimeKeeper": "MANUAL",
      "Ntp": {
         "Server": "0.0.0.0",
         "Frequency": 0,
         "DayOfWeek": 0,
         "TimeOfDay": "03:30:00",
         "TimeZone": "America/Chicago",
         "AntiMeridian": "AM"
      },
      "Network": {
         "HostName": "SCALE12S00337US",
         "ConnectionType": "Wired",
         "Wireless": {
            "Channel": "Auto : Roaming",
            "LinkRate": "Automatic",
            "Adapter": {
               "Ssid": "Walmartwifi",
               "SecurityMethod": "OPEN",
               "Encryption": "WEP"
            },
            "Authentication": {
               "DefaultKey": 1,
               "Key1": null,
               "Key2": null,
               "Key3": null,
               "Key4": null
            }
         },
         "IpConfig": {
            "IsStatic": true,
            "DhcpServer": null,
            "IpAddress": "55.42.136.76",
            "SubnetMask": "255.255.255.0",
            "Gateway": "55.42.136.1"
         },
         "Dns": {
            "AutoDns": false,
            "DnsServer1": "55.42.136.129",
            "DnsServer2": null,
            "DnsServer3": null,
            "DnsSuffix1": "s00337.us.wal-mart.com",
            "DnsSuffix2": "wal-mart.com",
            "DnsSuffix3": null,
            "DnsSuffix4": null,
            "DnsSuffix5": null,
            "DnsSuffix6": null
         }
      },
      "Snmp": {
         "IsEnbaled": false,
         "VariablesPort": 161,
         "TrapsIp": null,
         "TrapsPort": 162
      }
   }
}
```

3) Callback Event

- The event is triggered by other events, when requested, after that event is completed so that information about the execution of the event can be transmitted to the Walmart servers.
- Parameters: (NONE)
- Request Header

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Callback Event Request


```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "78e82521-0f00-11eb-b25f-fa163e078af2",
   "RequestTimestamp": "2020-10-14T11:48:00-05:00",
   "CallbackUuid": "9fd4991d-0d9e-11eb-8b79-fa163e078af2",
   "CallbackEventType": "APPLY_SETTINGS",
   "IsEventSuccessful": true,
   "IsBackoutSuccessful": null,
   "Output": {
      "LogText": "The operation was successful.",
      "ErrorText": null
   }
}
```


- Response Header: (NONE)
- Response Body:

Callback Event Response


```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "78e82521-0f00-11eb-b25f-fa163e078af2",
   "RequestTimestamp": "2020-10-14T11:48:00-05:00",
   "CallbackUuid": "9fd4991d-0d9e-11eb-8b79-fa163e078af2",
   "CallbackEventType": "APPLY_SETTINGS",
   "IsEventSuccessful": true,
   "IsBackoutSuccessful": null,
   "Output": {
      "LogText": "The operation was successful.",
      "ErrorText": null
   }
}
```


4) Fetch PLU Event

- **NOTE: COOL DATA STRUCTURES NEEDS REFINING**
- When this event is triggered, it calls a service that retrieves a list of PLU data to update in the scale.
- Parameters
- offsetTimestamp
    - Timestamp (UTC)
    - Optional
    - Default = *NULL*
    - Examples:
        - ? offsetTimestamp=2020-10-13T14:46:13Z
        - ?offsetTimestamp=null
        - <No Parameter> defaults to null
- Request Header:

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Fetch Plu Event Request

```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "ac0cbfef-0d9e-11eb-8b79-fa163e078af2",
   "RequestTimestamp": "2020-10-15T11:39:00-05:00",
   "PluRecordCount": 611,
   "BlockedPlus": [
      989,
      60477,
      60478
   ],
   "LastFetchPluOffsetTimestamp": "2020-10-13T14:46:13Z"
}
```

- Response Header: (NONE)
- Response Body:

Fetch Plu Event Response

```
{
   "ResponseUuid": "ac0cbfef-0d9e-11eb-8b79-fa163e078af2",
   "ResponseTimestamp": "2020-10-15T16:39:01Z",
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RemoveProductsOnNotInList": true,
   "NewFetchPluOffsetTimestamp": "2020-10-15T16:39:00Z",
   "Products": [{
         "ProductNumber": 989,
         "Description": "FRENCH BREAD<BR>FRESH BAKED IN STORE",
         "ProductType": "RANDOM_WEIGHT, FIXED_WEIGHT, BY_COUNT, FLUID_OUNCES",
         "BarCodeType": 2,
         "BarCode": 989,
         "ReportingClass": 999999,
         "IsRemotePrintOnly": true,
         " Pricing": {
            "ByCount": 1,
            "NetWeight": 14,
            "TareWeight": null,
```

```
            "UnitPrice": 1.49
         },
         " ProductLife": {
            "ShelfLifeDays": 3,
            "ShfelfLifeHours": 0,
            "ProductLifeDays": 0,
            "ProductLifeHours": 0
         },
         " Labeling": {
            "LabelPlacement": null,
            "LabelRotation": null,
            "LabelType1": 103,
            "LabelType2": 203,
            "LabelType3": null,
            "Graphic1": null,
            "Graphic2": null,
            "Graphic3": null,
            "Graphic4": null
         },
         "Texts": {
            "ExpandedText1": "INGREDIENTS: ENRICHED FLOUR (WHEAT FLOUR, MALTED BARLEY FLOUR, NIACIN,
FERROUSSULFATE, THIAMINMONONITRATE, RIBOFLAVIN, FOLIC ACID), WATER, YEAST. CONTAINS 2% OR LESS OF: SALT, SUGAR,
SOYBEANOIL, DATEM, CALCIUM SULFATE, ASCORBIC ACID, AMMONIUM SULFATE, ENZYMES, VITALWHEAT GLUTEN. CONTAINS WHEAT
AND SOY.",
            "ExpandedText2": null,
            "SpecialMessage": null,
            "ProductNote": null,
            "ProductMarquee": null,
            "Recipe": null,
            "CookingInstructions": null,
            "SuggestiveSelling": null,
            "Allergens": null
         },
         "Cool": {
            "Category": 9999,
            "IsForced": true,
            "IsRequired": true,
            "Text": "PRODUCT OF United States"
         },
         "NutritionFacts": {
            "ServingSizeText": "1/8 OF LOAF",
            "ServingsPerContainerText": "8",
            "NutriCommentText": null,
            "ServingsPerContainerQty": 80,
            "TotalFatQty": 10,
            "TotalFatPct": 10,
            "BetaCarotenePct": 0,
            "BiotinPct": 0,
            "CalciumQty": 0,
            "CalciumPct": 0,
            "CaloriesQty": 140,
            "CaloriesPct": 0,
            "CaloriesFromFatQty": 100,
            "CaloriesFromSaturatedFatQty": 0,
            "CarbohydrateQty": 280,
            "CarbohydratePct": 100,
            "CholesterolQty": 0,
            "CholesterolPct": 0,
            "CopperPct": 0,
            "DietaryFiberQty": 10,
            "DietaryFiberPct": 40,
            "SoluableFiberQty": 0,
            "InsolFiberQty": 0,
            "FolatePct": 0,
            "IodinePct": 0,
            "IronQty": 17,
            "IronPct": 100,
            "MonousatFatQty": 0,
            "MagnesiumPct": 0,
            "NiacinPct": 0,
            "OtherCarboQty": 0,
```

```
            "PantotthenicPct": 0,
            "PhosphorusPct": 0,
            "PolyusatFatQty": 0,
            "PotassiumQty": 0,
            "PotassiumPct": 0,
            "ProteinQty": 50,
            "ProteinPct": 0,
            "RiboflavinPct": 0,
            "SaturatedFatQty": 0,
            "SaturatedFatPct": 0,
            "SodiumQty": 2900,
            "SodiumPct": 130,
            "SugarQty": 10,
            "SugarAlcoholQty": 0,
            "AddedSugarQty": 0,
            "AddedSugarPct": 0,
            "ThiaminPct": 0,
            "TransfatQty": 0,
            "VitaminAPct": 0,
            "VitaminB12Pct": 0,
            "VitaminB6Pct": 0,
            "VitaminCPct": 0,
            "VitaminDQty": 0,
            "VitaminDPct": 0,
            "VitaminEPct": 0,
            "ZincPct": 0
         }
      }, {
         "ProductNumber": 122,
         "Description": "6CT BAVARIAN FILLED<BR>BISMARKS",
         "ProductType": "FIXED_WEIGHT",
         "BarCodeType": 2,
         "BarCode": 7874298122,
         "ReportingClass": 999999,
         "IsRemotePrintOnly": false,
         " Pricing": {
            "ByCount": 1,
            "NetWeight": 16,
            "TareWeight": null,
            "UnitPrice": 2.97
         },
         " ProductLife": {
            "ShelfLifeDays": 2,
            "ShfelfLifeHours": 0,
            "ProductLifeDays": 0,
            "ProductLifeHours": 0
         },
         " Labeling": {
            "LabelPlacement": null,
            "LabelRotation": null,
            "LabelType1": 105,
            "LabelType2": null,
            "LabelType3": null,
            "Graphic1": null,
            "Graphic2": null,
            "Graphic3": null,
            "Graphic4": null
         },
         "Texts": {
            "ExpandedText1": "INGREDIENTS: DONUT: ENRICHED FLOUR (WHEAT FLOUR, MALTED BARLEY FLOUR, NIACIN,
REDUCED IRON, THIAMINE MONONITRATE, RIBOFLAVIN, FOLIC ACID), WATER, PALM OIL, HIGH FRUCTOSE CORN SYRUP, SUGAR,
DEXTROSE, CONTAINS 2% OR LESS OF SOY OIL, YEAST, MODIFIED CORNSTARCH, SALT, WHEY (MILK), MONO- AND
DIGLYCERIDES, SODIUM ACID PYROPHOSPHATE, SODIUM BICARBONATE, SOY FLOUR, PRE-GELATINIZED WHEAT STARCH, SODIUM
STEAROYL LACTYLATE, NATURAL AND ARTIFICIAL FLAVORS, PROPYLENE GLYCOL, XANTHAN GUM, PRESERVATIVES (SORBIC ACID,
SODIUM BENZOATE), COLOR ADDED, EGG WHI TES, LACTIC ACID, CORN SYRUP, PHOSPHORIC ACID, GLYCERIN, YELLOW 5,
YELLOW 6, EGGS, POLYSORBATE 60, SKIM MILK, EGG YOLKS, DATEM, CALCIUM STEAROYL-2-LACTYLATE, WHEAT GLUTEN,
CALCIUM SULFATE, WHEAT STARCH, AMMONIUM SULFATE. ARTIFICIALLY FLAVORED CHOCOLATE ICING: SUGAR, WATER,CORN
SYRUP, PALM OIL, COCOA PROCESSED  WITH ALKALI, CONTAINS 2% OR LESS OF SOYOIL, MONO- AND DIGLYCERIDES (WITH CITR
IC ACID ADDED A PRESERVATIVE), POLYSORBATE 60, SALT, PRESERVATIVES (SODIUM PROPIONATE, SORBIC ACID), SOY
LECITHIN, COLOR ADDED, NATURAL AND ARTIFICIAL FLAVOR, PROPYLENE GLYCOL, DEXTROSE, CORNSTARCH, XANTHAN GUM,
CITRIC ACID. POWDERED SUGAR: SUGAR, MODIFIED CORNSTARCH. CONTAINS MILK, EGGS, WHEAT AND SOY. MAY CONTAIN TRACES
```

```
OF COCONUT, PECANS, WALNUTSAND PEANUTS.                                ",
            "ExpandedText2": null,
            "SpecialMessage": null,
            "ProductNote": null,
            "ProductMarquee": null,
            "Recipe": null,
            "CookingInstructions": null,
            "SuggestiveSelling": null,
            "Allergens": null
         },
         "Cool": "null",
         "NutritionFacts": "null"
      }
   ],
   "CustomCool": {
      "CategoryProductionStep": [{
            "Category": 7601,
            "ProductionStep": "PRODUCT OF"
         }, {
            "Category": 7601,
            "ProductionStep": "BORN IN"
         }
      ],
      "CategoryCountry": [{
            "Category": 7601,
            "Country": "United States"
         }, {
            "Category": 7601,
            "Country": "Canada"
         }
      ]
   }
}
```

5) Upgrade Firmware Event

- When this event is triggered, it calls a service that delivers files needed for a firmware upgrade (.tgz file).
- Parameters:
  - fileName
    - String
    - Required
    - Examples
      - ?fileName="hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz.partaa"
      - ?fileName="hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz.partab"
- Request Header:

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Upgrade Firmware Event Request

```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "b9c70a2f-0d9e-11eb-8b79-fa163e078af2",
   "RequestTimestamp": "2020-10-14T11:48:00-05:00",
   "FileName": "hti-linux-feature-wm_cake_label-3.3.162-04072020_0935.package.tgz.partaa"
}
```

- Response Header:
    - Applicable headers that specify the file is being downloaded as a tgz file.

- Response Body:
    - Attached File needed to install the firmware upgrade.

6) Install Feature Event

- When this event is triggered, it calls a service that delivers files needed to install a Hobart Feature File (.ht file)
- Parameters: (NONE)
- Request Header:

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

- Request Body:

Install Feature Event Request

```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "c0df9ef6-0d9e-11eb-8b79-fa163e078af2",
   "RequestTimestamp": "2020-10-14T11:48:00-05:00",
   "FileName": "CustomerDisplay.ht"
}
```

- Response Header:
    - Applicable headers that specify the file is being downloaded as a tgz file.

- Response Body:

    - Attached File needed to install the firmware upgrade.

7) Load Label Formats Event

- When this event is triggered, it calls a service that delivers file(s) need to update the label format templates (.std file)
- Parameters:
    - fileName
        - String
        - Required
        - Examples
            - ?fileName="US-WM-HOB-HTI-DELI_20210122-103.ht"
            - ?fileName="US-WM-HOB-HTI-DELI_20210122-203.ht"
    - Request Header:

```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```

    - Request Body:

Load Labels Event Request


```
{
   "SerialNumber": 451155881,
   "StoreNumber": 337,
   "CountryCode": "US",
   "ScaleVendor": "HOBART",
   "ScaleModel": "HTi-LH",
   "RequestUuid": "cbfd7217-0d9e-11eb-8b79-fa163e078af2",
   "RequestTimestamp": "2020-10-14T11:48:00-05:00",
   "FileName": "US-WM-HOB-HTI-DELI_20210122-103.ht"
}
```


- Response Header:
  - Applicable headers that specify the file is being downloaded as a tgz file.
- Response Body:
  - Attached File needed to install the firmware upgrade.

8) Capture Metrics Event

- When this event is triggered, it calls a service to deliver scale usage/reporting metrics.
- Metrics: **TBD** but can include:
  - Number of labels printed (by PLU) (by manual key or Remote Print)
  - Offline metrics
  - Scale Errors
  - Service Recommendations
  - Etc.
- Request Headers:


```
{
  "method": "POST",
  "headers": {
    "wm_consumer.id": "30bb1a61-5a78-11eb-998a-fa163e138193"
  }
}
```


- Request Parameters: **TBD**
- Request Body: **TBD**
- Response Header: (NONE)
- Response Body: **TBD**