

REIMAGINED TOPIC SEARCH USER GUIDE

Table of Contents

Topic Search	2
What is Topic Search	2
Introducing Re-imagined Topic Search	2
Topic Access URLs	3
Topic Search New Data Source Onboarding Playbook	4
Re-imagined Topic Known Issues.....	4
Re-imagined Topic Important Updates	4
Changes in Newsgroup	4
Home Page Features.....	5
Selecting data sources	6
Setting User Preferences.....	6
Setting Preferred Typeaheads.....	7
CDETS preferred URL	8
CSOne preferred URL.....	9
Auto Suggestion	10
Topic User Guide, Trainings, FAQ & Support links	10
Dark Mode	11
Natural Language search for CSOne	12
Results Page Features	14
Sort By	14
Filters/navigators	14
Retaining Filter Selection	14
Retaining User Preferred Data Source in Left pane.....	14
Copy / Pasting Topic search URL.....	14
Multiple filter options	14
Edit Filters	14
Search Suggestions	14
Simple View/Detailed View	14
Collapsed Left.....	14
Export to Excel	14
Result specific functions	14
Highlighting (Snippet Behavior)	14
Cached links	14
Preview.....	14
Field Notice Public and Confidential URL redirect.....	14
Metadata customization.....	14
Edit Data sources.....	14
CSOne, AppD Zendesk, Umbrella Zendesk & Newsgroup Data Protection.....	14

User ID Boost (UIB).....	14
Reference Links	14
Context Based Filter	14
Semantic Search (ON / OFF)	14
EOL Link	14
Data Retention	14
Search Help.....	14
Simple Search.....	14
Advanced Search	14
Phrase search.....	14
Ranges.....	14
Boolean Operators.....	14
Fielded Search / Metadata search	14
Wildcards	14
Fuzzy Search.....	14
Frequently used field names for Advanced search:	14
Literal Search	14
Literal Search Fields	14
Data Source Update frequency in Topic	14
Common Fields for all Data Sources.....	14
Acano fields	14
Accedian fields	14
AIX Fields	14
Anonymized Case RCAs Fields	14
AppD Zendesk Fields.....	14
AS Templates (ICT) Fields	14
ASApedia Fields.....	14
BDB Fields	14
BEMS Fields.....	14
Broadhop fields	14
Broadsoft SVN Fields	14
BORG Alerts Fields.....	14
CDETS Fields.....	14
Ciam Fields.....	14
Cisco DNA Spaces (Zendesk) Fields	14
Cisco.com Fields	14
CliQr Fields.....	14
Composite Fields	14
CSOne Fields	14
CX Catalog Fields	14
CX Training Fields	14
DCP Fields	14
Dynamicsoft Fields	14

Exablaze Fields	14
Field Notice Fields	14
Gnosis Fields	14
Guided (GPS-lite) Workflows Fields	14
Intucell Fields	14
IT Wiki Fields	14
Jira AMP Fields	14
Jira Webex Fields.....	14
Lancope Fields.....	14
Licensing Fields.....	14
Newscale Fields.....	14
Newsgroup Fields	14
Policy Central (CPPC) Fields.....	14
PSIRT External Fields.....	14
PSIRT Internal Fields	14
Service Grid Fields	14
Shogun Fields	14
Sourcefire Fields.....	14
Starent Fields	14
Tandberg Fields	14
Tech Zone / NPI Training Fields	14
NPI Training Fields (exclusive other than Techzone fields).....	14
Ubiquisys Fields.....	14
Umbrella Zendesk Fields.....	14
Vidcast Fields	14
Viptela Fields.....	14
Webex Help Center (Collab help Portal) Fields.....	14
Whiptail Fields	14
<i>Appendix: Topic Queries Cheat Sheet</i>	<i>14</i>
Search Modes.....	14
Common Operators	14
Common SR Searches	14
Common CDETS Searches	14
Common TechZone Searches.....	14
Common Newsgroup Searches.....	14

Topic Search

What is Topic Search

Topic is a google-like search engine for finding information within Cisco. It is a commonly used tool to find related cases, bugs, training, documents and more when working on customer cases.

The common use case for searching in Topic Search is to research an issue seen by your customer and

- Exploring the possibility that someone else out there may have seen the same problem
- Trying to find a defect or hot page that could be related to the issue
- Reviewing the intellectual capital available within various sources like TechZone

Topic helps you find the proverbial "*needle in a haystack*" considering it searches across over **50 million** documents from over 43 **Data sources** including C3, CDETS, TechZone, Newsgroups etc.

Introducing Re-imagined Topic Search

The new Reimagined Topic Search application is built on a new cloud native search engine (Elasticsearch on GCP) and solves several challenges present in legacy Topic Search

1. It brings in a **Near Realtime** search capability made possible by Elasticsearch and GCP architecture
 - CSOne, CDETS, Techzone content findable within minutes (~10 to 30 min) vs multiple hours on legacy Topic
 - The new engine supports partial updates for indexed documents. This improves efficiency and speed.
2. It introduces "**Literal Search**" mode in Topic Search along with Simple and Advanced modes
 - Literal search helps to exactly match debug output / code segments / special characters etc. in the content. Given that 30% of searches in Topic are of this type, this promises to be a big productivity boost.
3. It simplifies the Topic Search **UI / UX** by leveraging UX best practices and design suggestions and should make it easier to use
4. It introduces **AI powered capabilities**
 - AI powered relevancy improvements provide an extendable engine that leverages NLP and Machine Learning
 - 3 powerful AI features integrated on Search UI

- i. DeepQA – Deep Learning based solution suggestions
- ii. Similar SRs (AIRA) – automatically identifies similar SRs using NLP matches
- iii. SR resolution summaries – automatically displays top resolution summaries for the query for a quick scan

5. The application is **Zero Trust enabled** - zero trust architecture allows users to get borderless access to Topic Search. Zero Trust allows Topic users to benefit from information security checks that make sure the user and device is safe every single time of access - and this check is done without disturbing our end users. (No VPN needed for Topic search access.)

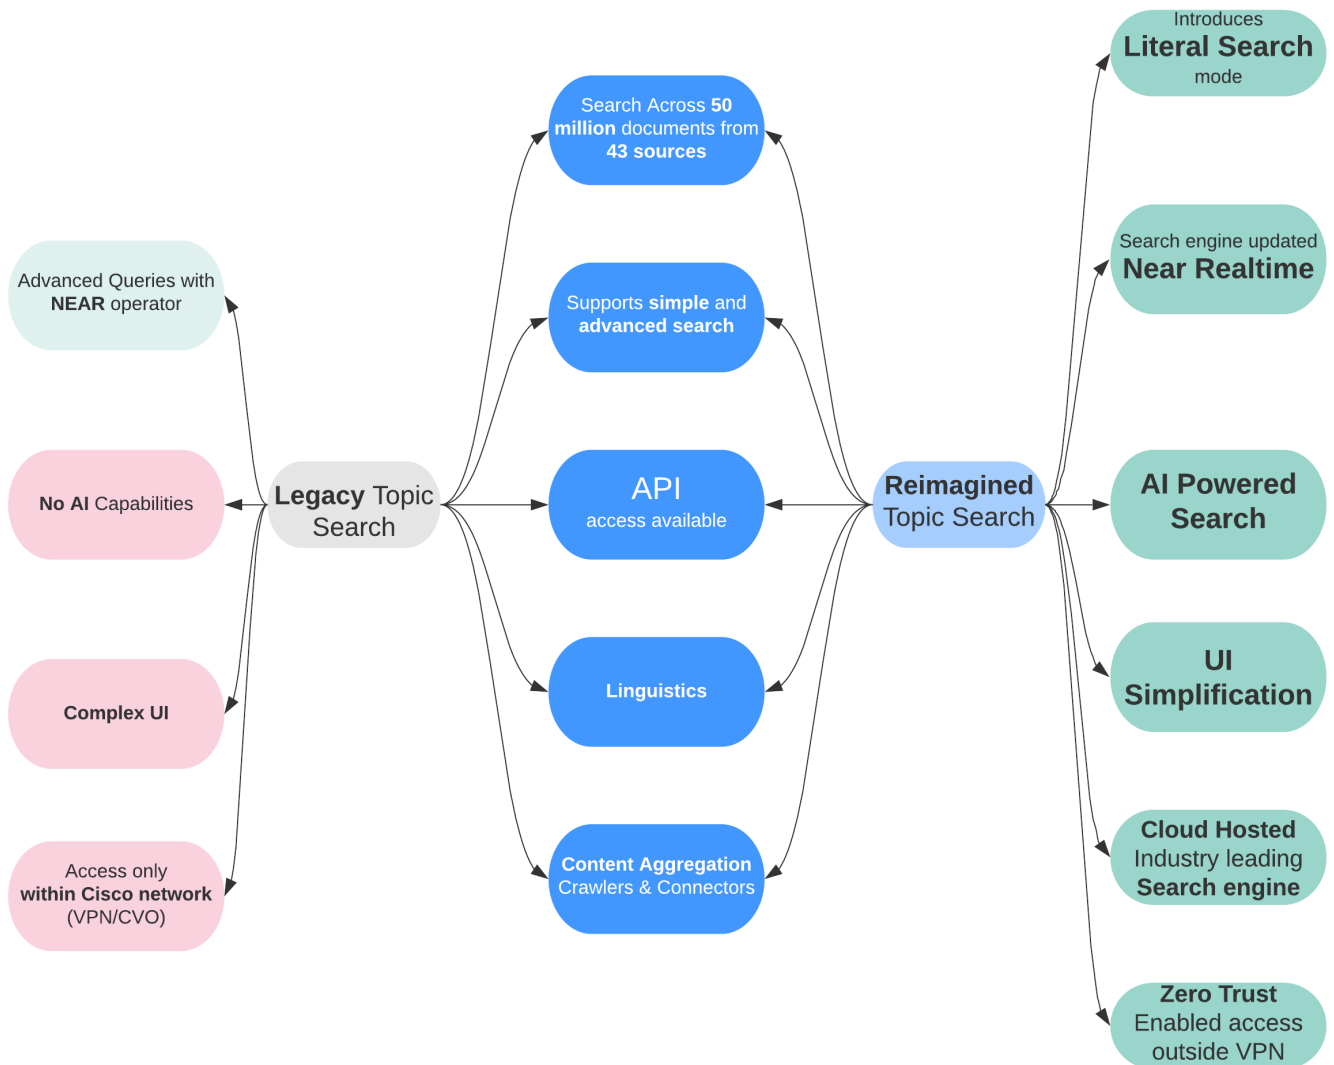


Figure: Comparison of Reimagined Topic search and Legacy Topic Search

Topic Access URLs

<https://topic.cisco.com> is the main URL to access Reimagined Topic Search.

Notes:

1. Note the new Reimagined Topic is only accessible over **https** when not connected over VPN. This is aligned to Reimagined Topic's support for **Zero Trust** for Cisco trusted machines. You can access Topic without being on Cisco VPN.

Note: When connected to the Cisco VPN, accessing <http://topic.cisco.com> will redirect users to <https://topic.cisco.com>

2. Please ensure that you update your bookmarks and scripts that link to legacy Topic URLs (<https://srchui.cloudapps.cisco.com/shrui/>) OR to the soft-launch URLs (<https://topic-prd.cisco.com>); to change to the topic vanity URL, (<https://topic.cisco.com>), after December 15, 2021, but before February 2022.

Topic API Access Endpoints

New Reimagined Topic API is live as of December 6, 2021, and the details of the new endpoints (<https://wsgi.cisco.com/cso/search/v1/topic/api>) and request structure/payloads are covered in the [API User Guide](#)

Topic Search New Data Source Onboarding Playbook

To learn more about new source onboarding, visit the SharePoint link -

https://cisco.sharepoint.com/:u:/r/sites/Enterprise-Search-Team/SitePages/Topic.aspx?csf=1&web=1&share=ERuQ161Ac4dLrKZjKx4WpPcB4jx4K-iJcAGL-J-lv_L3g&e=Tkogw9

Re-imagined Topic Known Issues

The queried fields may not appear in snippets when using fielded search except for the fields resolutionsummary, problemdescription, description, actionplan & customersymptom and the value should not contain some special chars like (,) etc.

Other known issues are covered in this document in the section detailing the impacted feature.

Re-imagined Topic Important Updates

Changes in Newsgroup

Cisco Email lists will no longer be archived to newsgroups. Email lists are created through Mailer and sometimes called "mailers". New messages will stop appearing in news.cisco.com, **snews.cisco.com**, and under the "Newsgroups" Datasource in Topic Search. Messages will start appearing in TechZone boards.

Going forward Email lists that are archived will appear as discussion boards in Techzone. Users can continue searching email archives with Topic Search. In Topic, check the box for "TechZone" to get

search results for emails archived to TechZone. In Topic use the checkbox for Newsgroups to see older emails from before July 15.

For more information click [here](#).

Home Page Features

Topic search has a home page where you can start your search journey. This page enables you to select data sources of interest, links to personalization preferences for the search experience

Selecting data sources

All the data sources checked by default would appear under the search box. Click on the "show more" link to view all the remaining options for data sources. All the options will come alphabetically sorted.

Users can update the default data sources list by selecting only the preferred ones and checking the box for "Always search within these checked data sources.", doing so will ensure that all future searches retain the new list of data sources as default. The "Reset" option can be clicked to return to the original list of data sources.

CISCO HIGHLY CONFIDENTIAL



Topic Search





February 21st, Topic 15.21.1 - NPI training datasource addition, literal search enhancement and bug fixes [More details](#)

Find User and API guides at the top right. [Questions?](#)



Topic Search

🔍

[Advanced Search Tips](#)

Data Sources

☐ All	☒ BDB	☒ CDETS	☒ CSOne
☒ CX Catalog	☒ CX Training	☒ Field Notice	☒ Newsgroup
☒ NPI Training	☒ PSIRT External	☒ Tech Zone	

[Show less](#)

☐ Acano	☐ Accedian	☐ AIX	☐ AppD Zendesk
☐ AS Templates (ICT)	☐ ASApedia	☐ BEMS	☐ Broadhop
☐ Broadsoft SVN	☐ Broadsoft Xchange	☐ CIAM	☐ Cisco DNA Spaces
☐ Cisco.com	☐ CliQr	☐ Composite	☐ DCP
☐ Dynamicsoft	☐ Exablaze	☐ Gnosis	☐ GPS-lite Workflows
☐ GRwiki	☐ Intucell	☐ IT Wiki	☐ Jira AMP
☐ Jira Webex	☐ Lancope	☐ Licensing	☐ Newscale
☐ Policy Central(CPPC)	☐ PSIRT Internal	☐ ServiceGrid	☐ Shogun
☐ Sourcefire	☐ Starent	☐ TAC Wiki	☐ Tandberg
☐ Ubiquisys	☐ Umbrella Zendesk	☐ Viptela	☐ Webex Help Center
☐ Whiptail			


☐ Always search within these checked data sources

[Clear All](#) | [Reset](#)

Setting User Preferences

"My Preferences" gets displayed when the user mouse overs on the logged-in user image in the header section, as shown below.

- A pop up gets displayed, which allows the user to update the following settings in the user profile.
- The type of auto-suggest gets displayed when they key in the search query in the text box.
- The customizable base URLs for CDETS and CSOne as per preference.

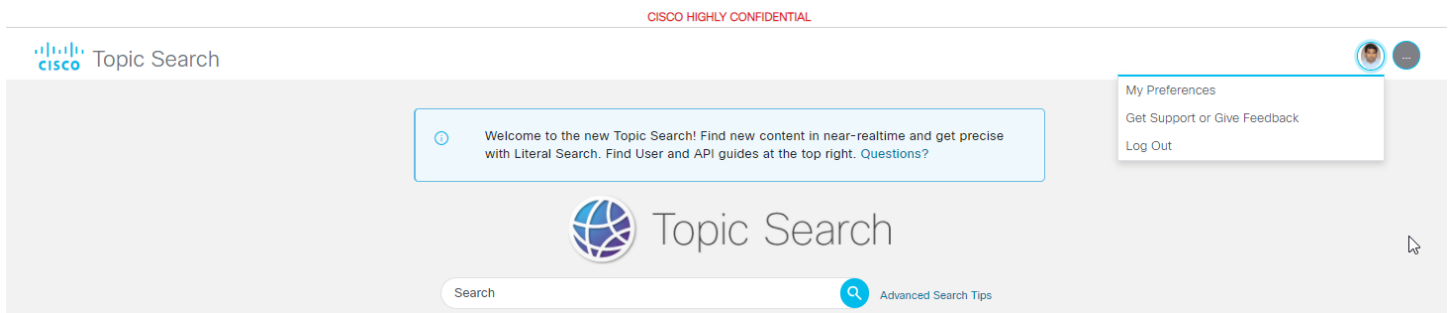

Setting Preferred Typeaheads

This setting controls the type of query recommendation for the user. Based on the chosen option, as shown below, auto-suggestion gets applied either on "browser history" or "system data".

Opting for "*System Data*" ensures the auto-suggest data displays more relevant suggestions. These are the ML phrases extracted as part of Topic vocabulary. If "*Your Browser search history*" is opted, the user's most recent and frequently searched queries are suggested as query recommendations.

Note: Topic typeaheads are generated using past one year worth of user queries and past few months of CSOne case titles.

Users can set the "Sort By" order of their choice in the User Preference window, saved preference is used as default sort order for all results. irrespective of search starts at the homepage or if the user arrives at results from a crafted URL. By default, "Relevancy" will be set as default Sort by order and the user can change from 3 preferences (i.e., **Relevancy / Date - Latest / Date - Oldest**). Other than these 3 Sort By options, there are few others displayed only for specific Data sources in the Search results page. If users select any of these sorting options, it will be retained till the user stays within that Data source tab and if toggles between other data source tabs, the sort by option changes to the one set in the User preferences.

Users also can override the preferred sort by order only in the Search Results page within the browser session.

The default option is "*System Data*". Users can choose the preferred option, click the "Save" button and reload the page for the changes to reflect.

There is an option for users to choose whether organic search results from the **Past 3 Years** or **All Results** should be displayed. The **Past 3 Years** will be served by default.

Under My Preferences, users should be able to change the "Semantic Search" setting.

Semantic Search is enabled by default. Users have the option to turn ON / OFF. This can be overridden in the SRP for that session.

My Preferences

Typeaheads based on

☐ My browser search history
 ☒ System Data

Default search results to

☒ Past 3 years
 ☐ All Time

User can set Search results display option ("Past 3 years" is the default option)

Note: Defaulting to All Time will give slower search results.

CDETS preferred URL
 ((%s) will be replaced by BugID)

CSOne preferred URL
 ((%s) will be replaced by SR)

Preferred Sort Order

User can set Sort By option ("Relevance" is the default option)

Dark mode settings

☐ Enabled
 ☒ Button
 ☐ use OS Setting

User can set UI background settings ("use OS Setting" is the default option)

Semantic search

☐ On
 ☐ Off
 ☒ Default

User can set Semmantic Search option (By default is Turned ON)

CDETS preferred URL

Users will be able to insert their preferred base URL and have the BugID appended to the end. This way, users can prefer their bug viewer of choice. The baseURL, as shown below, can be configured, and saved in the user profile. The BugID will be appended to that base URL for viewing bug details.

Default Preference CDETS URL (replace {%s} with Bug Id):

<https://cdetsng.cisco.com/summary/#/defect/{%s}> - (Clicking on reset button will save the default URL.)

Other CDETS Tool URL:

https://scripts.cisco.com/app/quicker_cdets/?bug={%s}

Steps to customize the URL:

1. Click on the "My Preferences" option from the login image icon on the header.
2. Click on the "Edit" icon to enter the preferred CDETS URL. *Note: {%s} will be replaced by BugID. The substitution string {%s} must appear at the end.*
3. Click on Apply to save and reload the page for the changes to get reflected.

CSOne preferred URL

Users will be able to insert their preferred base URL and have the SR appended to the URL. This way, users can prefer their SR viewer of choice. The base URL, as shown below, can be configured, and saved in the user profile. The SR will get appended to that base URL for viewing CSOne details.

Default Preference CSOne URL (replace {%s} with SR):

https://scripts.cisco.com/app/quicker_csone/?sr={%s} - (Clicking on reset button will save the default URL.)

Other CSOne Tool URL:


<http://mwz.cisco.com/{%s}>

Steps to customize the URL:

1. Click on the "My Preference" option from the login image icon on the header.
2. Click on the "Edit" icon to enter the preferred CSOne URL. *Note: {%s} will be replaced by SR number. The substitution string {%s} must appear at the end.*
3. Click on Apply to save and reload the page for the changes to get reflected.

Links to other documents in the header

The "more icon" in the header provides links to open the [API Document](#), this User Guide, Support, FAQ page and an option to join "Topic Search Questions" WebEx Teams Space. Clicking on this, it will navigate to the EURL page <https://eurl.io/#rkp-WXKwE>. This is a bot that will auto-add the user to the Webex Teams Space. This space is used for Topic feedback and discussions

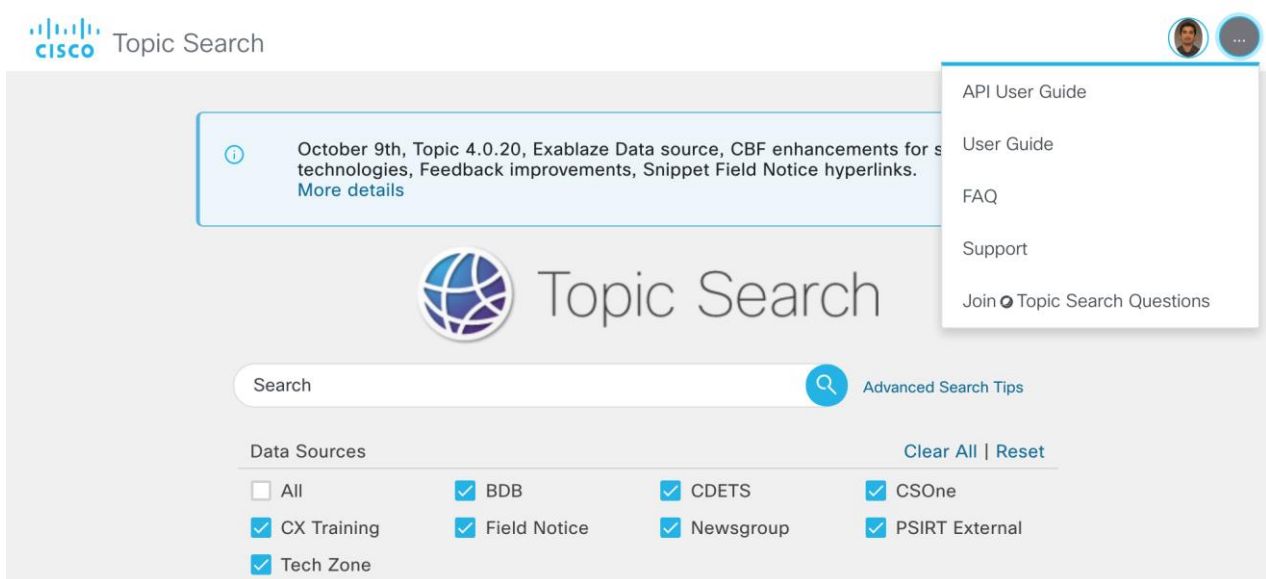


Auto Suggestion


The auto-suggest feature, as the name suggests, recommends the expansion of the query, which the user is typing to ease the process of querying the search engine. These suggestions will get sorted by popularity. The auto-suggest feature extends to sub-queries as well when the user is typing.

Based on the chosen option in the My Preferences à Edit Settings pop up, auto-suggestion gets applied either on "browser history" or "system data". The default option is "System Data."

Opting for "System Data" ensures the auto-suggest data returns more relevant suggestions. These are the ML phrases extracted as part of Topic vocabulary.

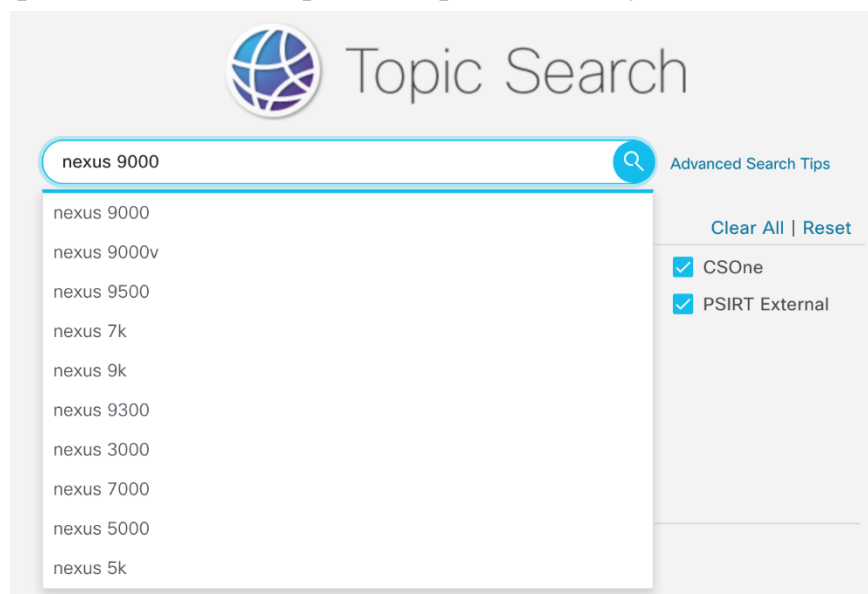


When System data is chosen

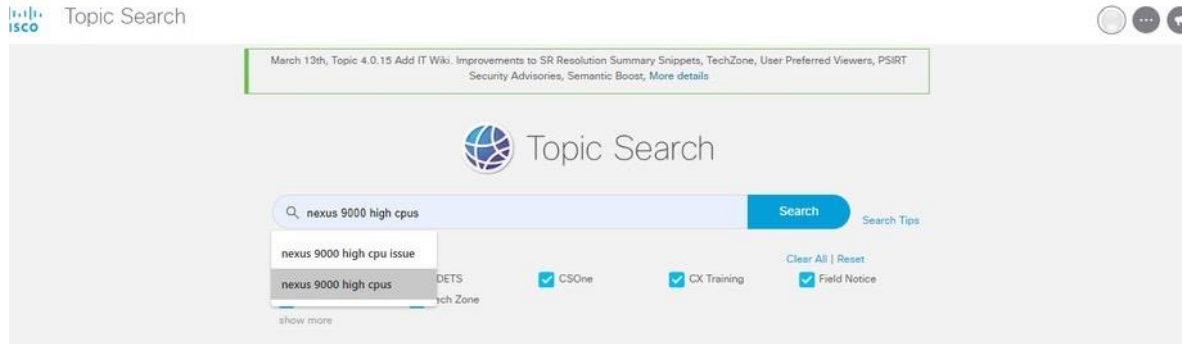

When Browser history option is chosen


Topic User Guide, Trainings, FAQ & Support links


Provided links in the header for the Topic Search Trainings, User Guides, FAQs, and Support.

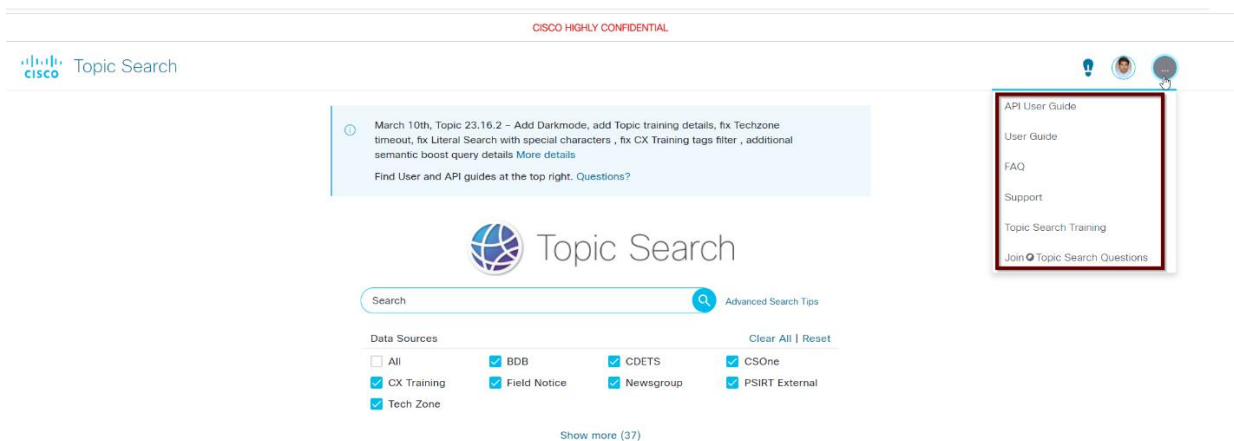

Dark Mode

A new bulb icon has been added to the header to toggle light and dark modes.

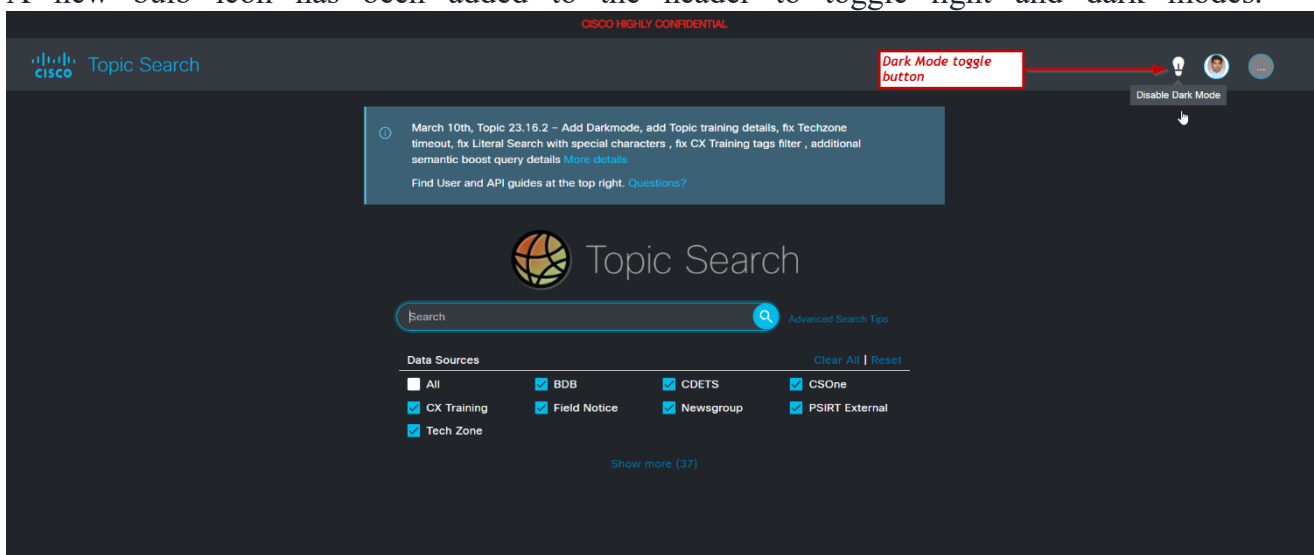

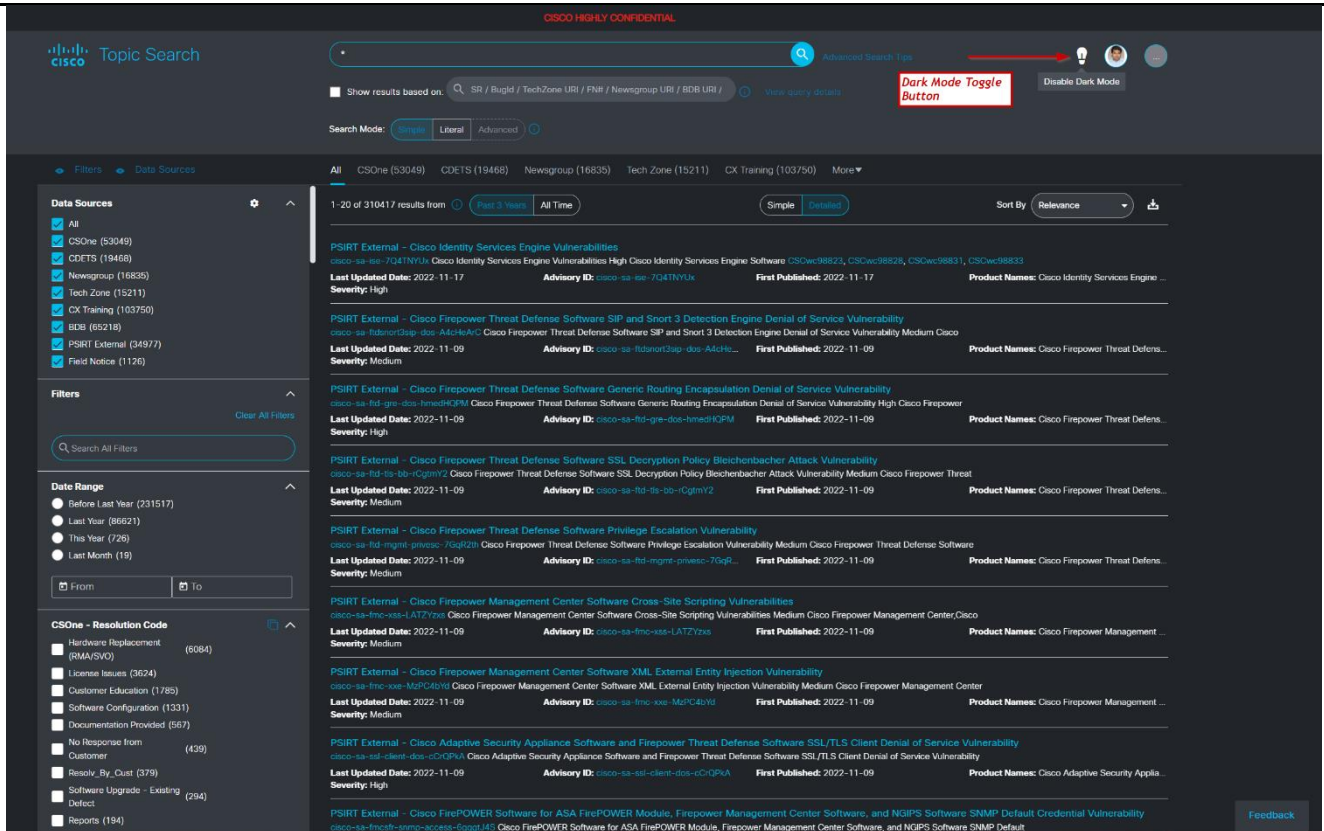

Natural Language search for CSOne

Natural Language (NL) search is an additional Topic search UI feature developed to improve accessibility and usability, especially for non-technical users with no or limited knowledge of Advanced search criteria in Topic search.

New design



Classic mode (default): Traditional keyword-based search.

AI mode (Beta): Natural language is parsed by an LLM to generate structured field: value queries or fallback terms which are applied to regular Topic search queries.

Benefits :

- Reduces learning curves for new users.
- Enables quick, conversational queries like:
"List all closed cases with ISR 4000 routers having BGP neighbor flaps"
"Find software failures in firewall configs"
- Increase engagement and user confidence.
- Reduces time taken to find relevant information to resolve cases or find information.

This feature is currently available to only Topic search users with **CSOne (C3)** access.

Frequently asked questions

What is the purpose of Natural Language search?

While powerful, keyword-based Elasticsearch search requires users to know specific fields, filters, and structure. Natural language search creates friction, especially when:

- Users are unfamiliar with underlying data structures.
- Queries span multiple fields or require intent-based interpretation.

Is this an AI assistant?

No. It is a limited UI feature that helps with alleviating the user burden of learning the Topic search user guide and advanced Topic search features like **operators, wildcards, simple, literal, advanced, fielded search** etc. especially for new users while they get use to these advanced features.

Does AI search can be used for follow-up conversation to resolve the case?

No. Only search parameters are identified by AI, and relevant Topic search CSOne metadata filters are applied to search. No follow-up conversation is available.

What does the AI use to form the Topic query from the Natural language query?


Open AI LLM is used to analyze the submitted query and uses Topic search metadata to retrieve the appropriate filters matching the query.

Is the feature open to all Topic search users?

No.

Which users can access the feature?

Currently, only users who have access to CSOne data source can see and use this feature. A new toggle button to switch to AI mode can be seen for users with CSOne access.

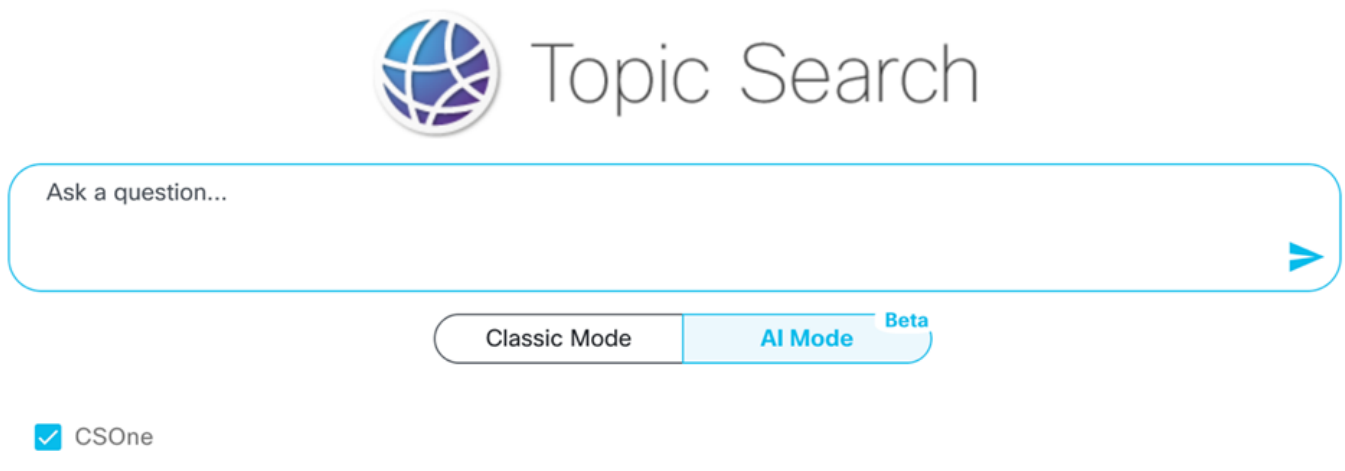

The screenshot shows the Topic Search interface. At the top, there is a logo consisting of a blue and purple globe icon next to the text "Topic Search". Below this is a large, rounded rectangular search bar with the placeholder text "Ask a question...". To the right of the search bar is a blue arrow icon. Below the search bar, there are two toggle buttons: "Classic Mode" and "AI Mode". The "AI Mode" button is highlighted with a blue border and has a small "Beta" label next to it. At the bottom left, there is a checkbox labeled "CSOne" which is checked.

Is there a Topic search api available for Natural language search?

No. This is a Beta only feature for now, and there is no Topic search API to consume for this feature.

Is all the content available in CSOne searchable?

Yes. Most of the CSOne content is available to search in this mode.

How can a Natural language question be asked?

A proper question can be formed with relevant details like mentioned below.

 Try these Questions

Show cases which are closed and have no defects attached

list all closed cases related to Cat9200 Ipv4 Routing issues

list all cases with IOS XE EIGRP neighbor stuck in initializing

bootup errors on mds9000 device

give me all the cases with unexpected BMC reset on pilot 4 servers on UCS blade

give me all cases with vpc peer link down intermittently

How are the results different from classic mode/regular search?

The submitted query will be interpreted by AI to form a structured Topic query with relevant metadata filters applied automatically on the search similar to when you select a filter from left nav filters in results page.

What happens if no AI interpreted filters are found for the given query?

If no matching AI filters are found for given query, a fallback search is performed with a keyword based regular simple search.

 Search parameters identified by AI ⓘ

AI didn't identify any search terms; showing keyword based search results

Can I still use the left nav in results page to apply relevant filters on top of AI filters?

Yes. Additional filters from left pane in the results page can be applied to get better results, like in regular search.

 Search parameters identified by AI ⓘ

status : Closed ✕ 

technology : LAN Switching ✕ Routing Protocols (Includes NAT and HSRP) ✕ 

subtech : Cat9200 ✕ Cat9200 - IPv4 Routing (OSPF, EIGRP, ISIS, RIP) ✕ 

Search terms : list all cases ✕ ipv4 routing issues ✕

  Search

Can we modify these search parameters to get better results?

Yes. The edit icon on the right for each metadata field can be used to remove or add additional field values, and clicking the search button below modifies the previous search with updated field values. It helps to get better results.

 Search parameters identified by AI ⓘ

status : Closed ✕ 

technology : LAN Switching ✕ Routing Protocols (Includes NAT and HSRP) ✕ 

- Other
- Security - Access Control - AAA and Policy Management
- Security - VPN and Mobility
- NMS (Network Management Services)
- Cisco Catalyst Center (Formerly Cisco DNA Center)
- Enterprise Platforms (Routing)

Will Natural language search be available to additional data sources in Topic search?

Yes. The topic search team is looking to extend this feature based on user feedback in Beta mode and working on additional AI based search solutions. Please submit your feedback and ideas to support space.

Demo Video - <https://app.vidcast.io/share/3472dcb4-4b6d-4153-911c-8e1e40879953>

Results Page Features

Sort By

The default sort option is "Relevance". The results will come sorted with the most relevant on top. Users can click on the "Sort By" drop-down and change the "sort" option. But, when the user changes the option to their preference, the "sort" option will be sticky within the browser session in the search results page.

Scenarios when the changed "sort" option is retained, which is different than the user preference sort by settings:

- Check/Uncheck filter options

- Check/Uncheck data sources Pagination and results per page Navigating to the data source tab switch
- On subsequent new searches on the results page.

Any search performed from Home page always inherit the Sort by option from the User Preference settings. Users can override the sort by options only in the Search Results page within the browser session.

The common options for all data sources are "Date - Latest", "Date - Oldest", and the default "Relevance". Certain data sources like BDB, DCP, etc. can have additional sort options that are more specific to their data source data.

Recently added Sort By options:

Metadata Name	Data Source
Defect Count	CSONE
Priority	CSONE
Linked SR's	CDETS
Tickets Count Direct	CDETS
depriority	CDETS
Severity	CDETS
Count of Linked SRs	Tech Zone
Kudos	Tech Zone
Views	Tech Zone
Replies	Tech Zone
Article Count	NewsGroup
Duration	CX Training

The screenshot shows the Cisco Topic Search interface. At the top, there's a search bar and a 'Show results based on' dropdown. Below that, there's a 'Search Mode' section with 'Simple', 'Literal', and 'Advanced' options. The main results area shows a list of search results. A dropdown menu for 'Sort By' is open, showing options: Date - Latest, Date - Oldest, Relevance, Trending, Usage, and Addition. A red arrow points to the 'Addition' option.

Filters/navigators

Search results can be further narrowed down by

- Data source à Uncheck unneeded data sources or use 'edit data sources' pop up to change selected collections
- Date à Use specific date filter (last week/last month/this year, last year, before last year, etc.) or use the calendars to provide a specific period.
- Using source-specific filters

Filter for a specific field will only appear if

1. It is enabled
2. The field takes different values in the search results. For example, the '*severity*' filter will not appear if all found documents have the same severity.

Source-specific filters appear when a single data source is selected. Every piece of metadata can serve as a filter/navigator. One can customize which filters show up and in which order by using 'edit filters' pop up. Customization can be applied to 1 session or made permanent by ticking 'Always display selected filters' checkbox.

While in “All” tab, source-specific filters will have its source name as prefix. Only the filters explicitly configured to appear in “All” tab will be displayed. Thus, not all filters available in the data source tab might appear in the “All” tab.

The screenshot shows the Cisco Topic Search interface. At the top, there's a search bar with the query 'nexus 9000 high cpu issue'. Below the search bar, there are tabs for 'All', 'CSOne (52910)', 'CDETS (1399)', 'Tech Zone (57)', 'CX Training (98)', 'BDB (41)', and 'More'. The 'CDETS (1399)' tab is selected. On the left, there's a 'Filters' sidebar with options like 'Date Range' (Before Last Year, Last Year, This Year, Last Month) and 'Product' (enterprise_sdm, n9k-standalone-sw, cat9300h, ewlc, cat9400, mig-to-ld, cat9500, app-nfr). The main content area shows search results for 'CDETS CSCvs72572 - High CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB'. Each result includes a title, a brief description, and a table of metadata such as Component, Status, Last-changed, Engineer, Product, Submitter-id, Bug has Diff, Bug is OIB, Date, Found, Project, Versions, Bug is SS, Trouble Tickets, BEMSO, Customer Visible, and Tickets Count Direct.

Retaining Filter Selection

Filter options like Date Range Filter, which is shared across all data sources, can be retained when we switch between the data source tabs or for subsequent query changes. Other filters can be retained for new searches too.

- Step 1: Select a filter option from the filters section. "Retain Selection" option as below in the filters section will be displayed.
- Step 2: On click of the "Retain Selection" link, the selected filter option gets applied

for further searches in the same session.

When in a single data source tab, for example, in CDETS, the selected filter options can be retained within this tab for further searches by following the same steps above. The caveat is that the user must stay in the same tab for the source-specific filter option to be retained.

The screenshot shows the Topic Search interface. At the top, there's a search bar with the query 'SR / BugId / TechZone URI / FNN / Newsgroup URI / BDB URI'. Below it, the 'Data Sources' section on the left lists various sources, with 'BDB' selected. The main results pane shows a list of search results, with the top result being 'BDB - BORG_NXOS_CSCvs72572_High_CPU_Nexus_9000_running_VXLAN_due_to_high_IPFIB'. This result includes details like 'Author: ...', 'Last Update Date: 2021-04-05', 'Language: python3', 'Usage: 0', 'Creation Date: 2020-06-03', 'Additions: 0', and 'Labels: ...'. A 'Show Related Results' link is also present.

Retaining User Preferred Data Source in Left pane

When the topic search is performed with a single data source, then the complete list of the user preferred data source(s) is still shown in the left pane (if any) i.e. If the user saves any preferred Data source and performs search by selecting Data source other than the preferred one, then the organic results will be based on the current selection and the user preferred data source will be listed in the left pane without selected.

The screenshot shows the Topic Search interface with a search for 'BEMS - (SNT)kddi:SPGW:PRD:Session SF was switched from slot7 to #9 and call failure keeps happening because of lack of flow-key-ip-pfcp'. The left pane shows the 'Data Sources' section with 'BEMS' selected. A red box highlights the 'Data Sources' list, indicating that the user's preferred sources are still visible. The main results pane shows search results for 'BEMS - (SNT)kddi:SPGW:PRD:Session SF was switched from slot7 to #9 and call failure keeps happening because of lack of flow-key-ip-pfcp'. This result includes details like 'Last Update Date: 2022-02-07', 'Product Family: GLO', 'Customer Name: KDDI', 'Owner: prile', 'Assistance: We got core file for both nor...', 'Case Owner Full Name: Pragati Tole', 'Customer Sentiment: This problem has b...', 'BEMS Case Number: BEMS01359581', and 'Submitter Full Name: Nobuyuki Kubota'. A 'Show Related Results' link is also present.

Copy / Pasting Topic search URL

There is a difference between “repos” parameter Vs “checkedds” parameter in the URL

e.g.,

Consider ASApedia, AIX, AS Templates (ICT) & Acano are the four user preferred data sources in the scenarios mentioned below

<https://topic.cisco.com/results?queryText=data&checkedds=fieldnotice> => We are not


considering checkedds for UI and if there are no repos parameter in the URL, then it will consider the user preferred data source and show the results based on that.

<https://topic.cisco.com/results?queryText=data&repos=fieldnotice> => If the "repos" parameter is provided in the URL, then the data source mentioned in repos will be considered for search results i.e., the "Field Notice" data source is checked, and the user-preferred data sources are unchecked in the search results page.

Multiple filter options

Multiple selections are supported in filters. For example, one can select 'severity' 1 and 'severity' 2.


To remove multiple selections, click on the 'cross' icon in the top right corner of the corresponding filter.

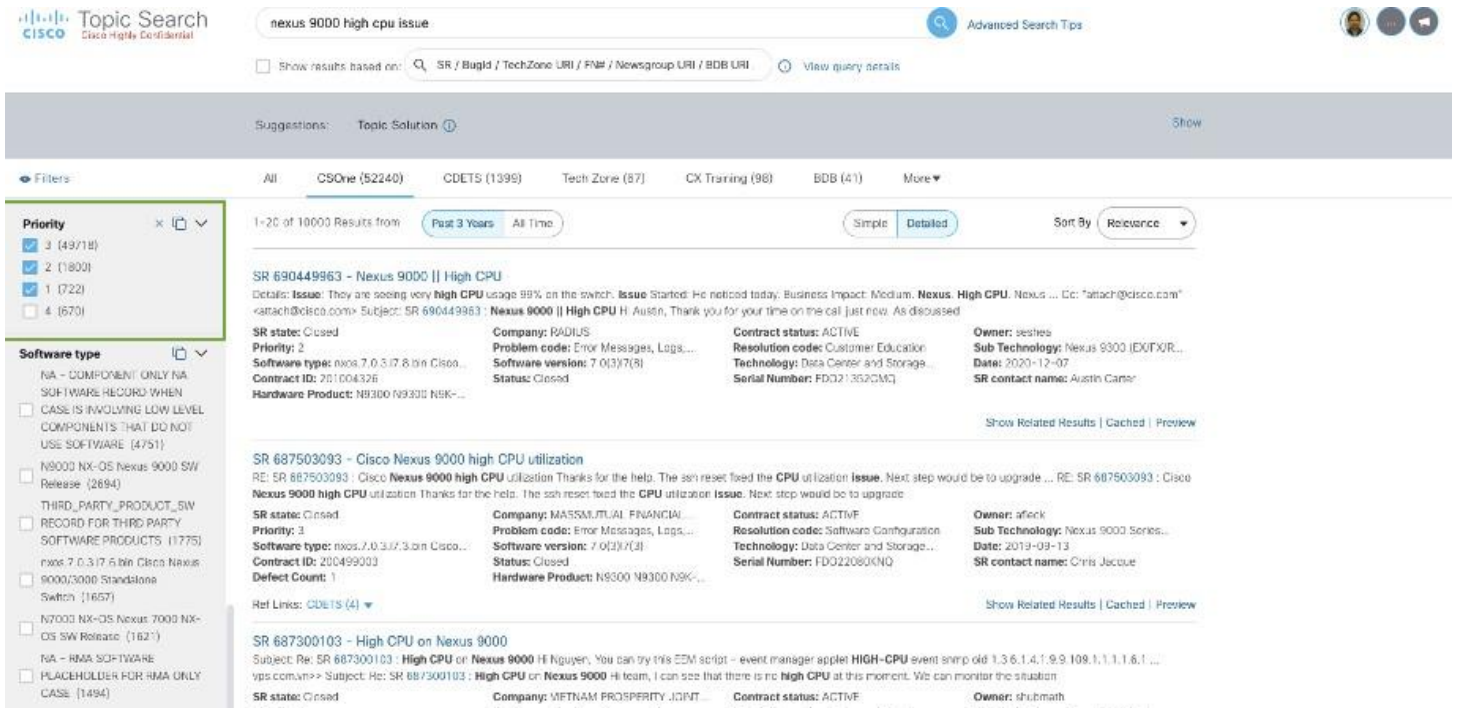

The screenshot shows the Cisco Topic Search interface. On the left, there is a 'Filters' sidebar with sections for 'Priority' (3, 2, 1, 4) and 'Software type' (NA - COMPONENT, THIRD_PARTY_PRODUCT_SW, RECORD FOR THRD PARTY SOFTWARE PRODUCTS, 9000/3000 Standalone Switch, N7000 NX-OS Nexus 7000 NX-OS SW Release, NA - RMA SOFTWARE, PLACEHOLDER FOR RMA ONLY CASE). The main search bar contains 'nexus 9000 high cpu issue'. Below the search bar, there are tabs for 'All', 'CSONe (52240)', 'CDETS (1395)', 'Tech Zone (87)', 'CX Training (98)', 'BDB (41)', and 'More'. The search results are displayed in a table format, showing details for SR 690449963 and SR 687503093.

Edit Filters


When a single data source is selected, filters for that data source will be displayed. For Example, when the user selects only CSONe data source they will be able to see all filters respective to CSONe data source in the filters section.

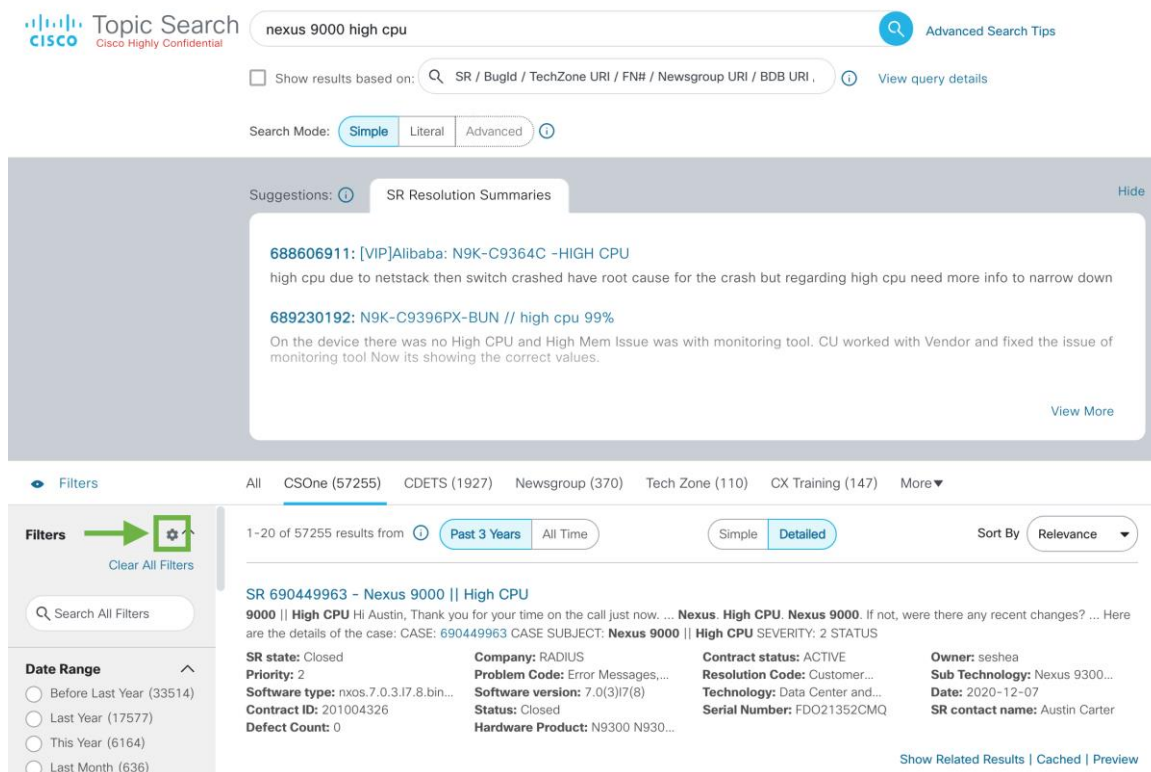

The screenshot shows the Cisco Topic Search interface with the 'Edit Filters' pop-up for the CSONe data source. The pop-up displays a list of filters for the CSONe data source, including 'Date Range' (Before Last Year, Last Year, This Year, Last Month) and 'Search All Filters'. The main search bar contains 'nexus 9000 high cpu'. Below the search bar, there are tabs for 'All', 'CSONe (57255)', 'CDETS (1927)', 'Newsgroup (370)', 'Tech Zone (110)', 'CX Training (147)', and 'More'. The search results are displayed in a table format, showing details for SR 690449963 and SR 689230192.


Users can configure the display of filters using the gear icon as shown above.

Edit Filters pop up for CSONe Data source:

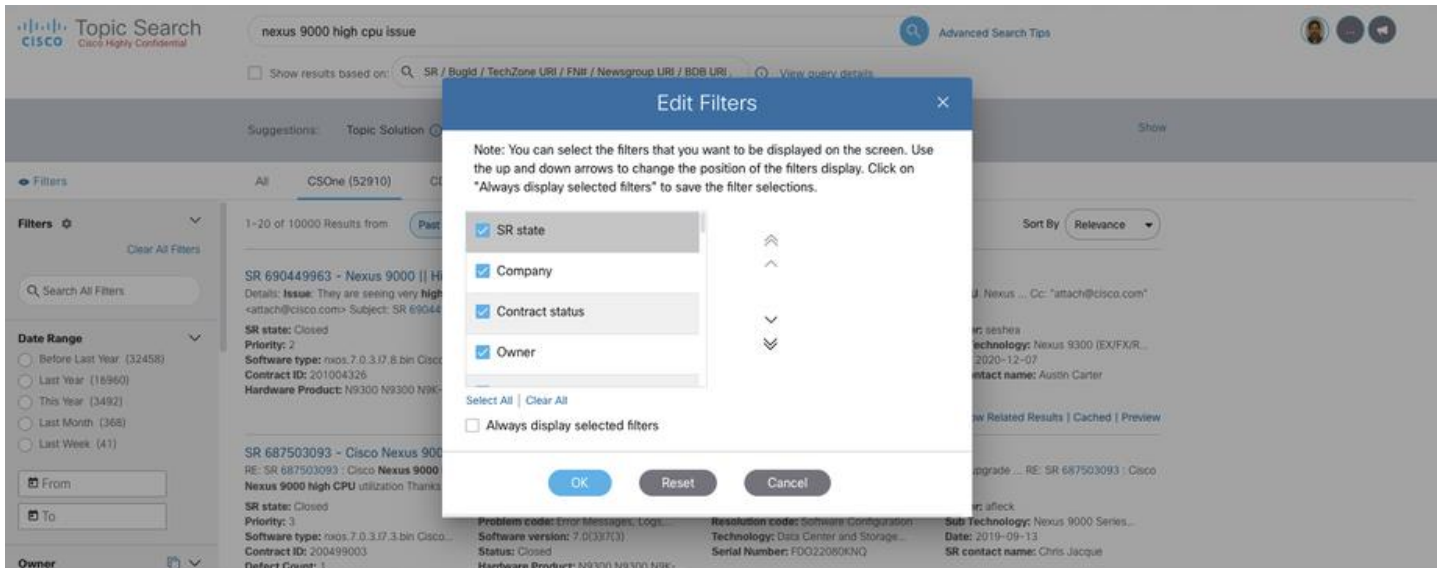

Edit Filter icon available only for Individual Datasource and not applicable for “All” tab right now.

By clicking "Select All" link and applying the checkbox in the Edit Filters window, display all applicable filters in the Filter pane based on the search criteria.

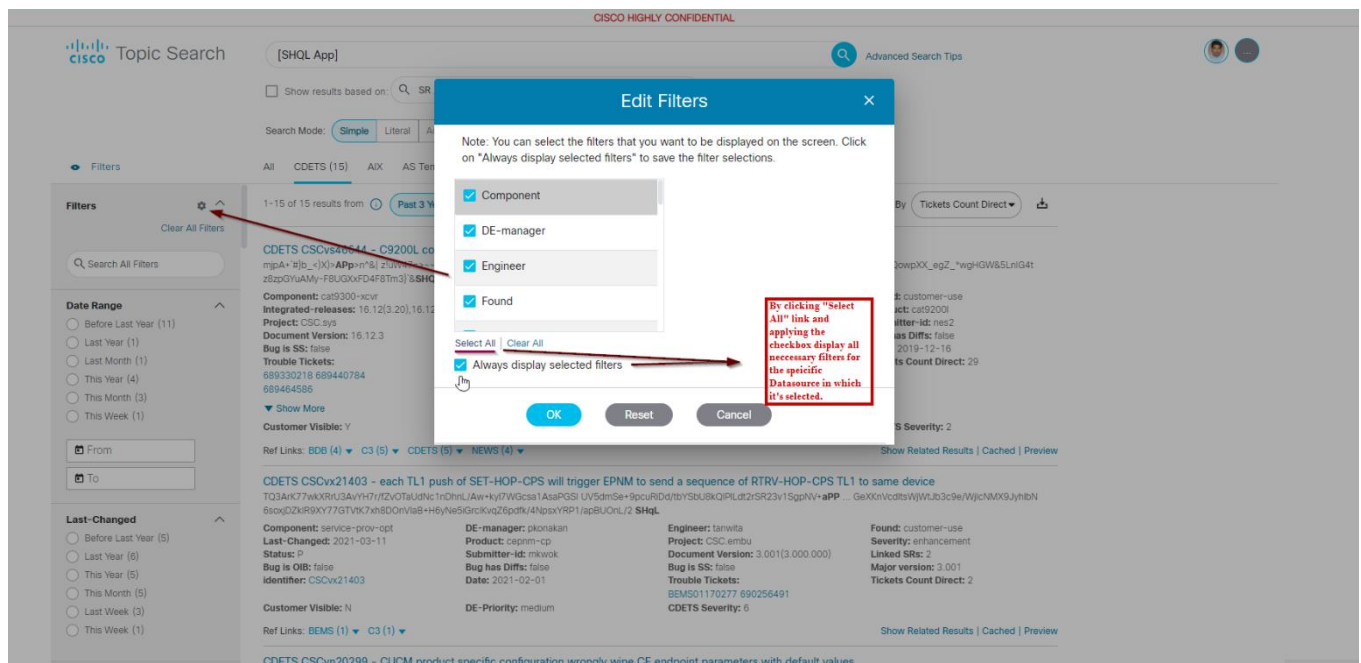

When multiple data sources are selected and User is in the “All” tab, only a few of the filters for each selected data source will get displayed with data source as a prefix with filtername. Example: CDETS data source "Product" filter is prefixed with CDETS as shown below.

nexus 9000 high cpu issue



Advanced Search Tips

☐ Show results based on:

SR / BugId / TechZone URI / FNN / Newsgroup URI / BDB URI ,



View query details

Search Mode:

Simple

Literal

Advanced



Suggestions:

SR Resolution Summaries

Show

Filters Data Sources

All Gnosis (1) CSOne (57084) CDETS (1700) Newsgroup (302) Tech Zone (84) More ▾

BDB - Language



Tech Zone - Style



CDETS - Project



CDETS - Severity



CDETS - Found



BDB - Labels



CX Training - Organization



☐ Engineering (103)

CDETS - Status



☐ V (1196)

☐ R (637)

☐ U (234)

1-20 of 59186 results from



Past 3 Years

All Time

Simple

Detailed

Sort By

Relevance ▾

CDETS CSCvs72572 - High CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB

gateway=NXOSSSTP&module=BORG_NXOS_CSCvs72572_High_CPU_Nexus_9000_running_VXLAN_due_to_high_IPFIB&sr=687294611&... CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB. ... CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB::CSC.datacenter Hi, I am currently evaluating

Component: vxlan-nve

Integrated-releases:...

Severity: severe

Linked SRs: 3

Major version: 9.3

DE-manager: sabadala

Last-changed: 2021-04-28

Status: V

Bug is OIB: false

Identifier: CSCvs72572

Engineer: sabadala

Product: n9k-standalone-sw

Submitter-id: sonag

Bug has Diffs: false

Date: 2020-01-18

Found: customer-use

Project: CSC.datacenter

Versions: 9.3(3)

Bug is SS: false

Trouble Tickets:

BEMS01007553

687607218 688280045

Customer Visible: Y

Attribute: citi-fixed-...

relateddefects:...

Resolved-on: 2020-02-25

Tickets Count Direct: 3

Ref Links: [BEMS \(1\)](#) [C3 \(5\)](#) [CDETS \(5\)](#) [NEWS \(3\)](#) [TZ \(1\)](#)

[Show Related Results](#) | [Cached](#) | [Preview](#)

CDETS CSCvx66917 - Cisco NX-OS Software VXLAN OAM (NGOAM) Denial of Service Vulnerability

.* Issue affects Nexus 9000 switches with software versions: 9.2.x 9.3(1) to 9.3(7) 10.1(1) Note: 7x ... A successful exploit could allow the attacker to cause an affected device to experience high CPU usage ... My customer has a N9K-C93180YC-FX running 9.3(2) and had an issue with High MTS that crashed the CFS

Component: ng-oam

Integrated-releases:...

Severity: severe

Linked SRs: 3

DE-manager: fedcolas

Last-changed: 2021-09-21

Status: V

Bug is OIB: false

Engineer: iabdelja

Product: n9k-standalone-sw

Submitter-id: deydav

Bug has Diffs: false

Found: customer-use

Project: CSC.datacenter

Versions: 9.2(1),9.3(1)

Bug is SS: false

Search Suggestions

Based on the search query, the suggestions to external systems will be recognized, and a link to the document will be suggested if it matches the Regexp pattern.

The search suggestions feature will include CVE, Failure analysis and other patterns.

S · N o ·	Regex Pattern	M e s s a g e d i s p l a y e d t o u s e r	URL Pattern
1	<code>^((?i)(bems)+\\d{4,7})\$ changing t0 8 digits</code>	D i d y o u e n t e r a B E M S I d e n t i f i e r?	https://clpsvs.cloudapps.cisco.com/services/clip/main/BEMS/{identifier}
2	<code>^((?i)(Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec)\\d{2}\\w{3,8}((?i)(BGL BJN BxB BxB_AS CAGSP CR CSTG DL C EUR EUR_AS FSP JAPAN JAPAN_AS KRK LWR MGRS MIAMI_AS MXC OT PERMS RCDN RCDN_AS RTP RTP_AS SCC SJ SJ_AS SYD SYD_AS TRNG VCE WEB)\\d{3,4}))\$</code>	D i d y o u e n t e r a C A L O C a s e N u m b e r?	http://omnitool.cisco.com/?db=16&startURL=/omnitool%3Fdb=16%26tool=314%26queue=149%26type=87%26action_two=ajax_open_existing_case_front%26action_two_param_one=dCodeEQUALS{identifier}
3	<code>^((?i)(cap)+\\d{4, 8})\$</code>	D i d y o u e n t e r a C A P I d e n t i f i e r?	https://clpsvs.cloudapps.cisco.com/services/clip/main/transaction/{identifier}

4	^((?i)(fa)+[-]+\d{7})\$	Di d yo u ent er a <u>En</u> <u>gi</u> <u>ne</u> <u>eri</u> <u>ng</u> <u>Fa</u> <u>ilu</u> <u>re</u> <u>An</u> <u>aly</u> <u>sis</u> <u>Id</u> <u>ent</u> <u>ifi</u> <u>er?</u>	https://www-plmprd.cisco.com/Agile/object/StandardFA Case/{identifier}
5	^((?i)(rrr)+\d{5,7})\$	Di d yo u ent er a <u>Re</u> <u>gi</u> <u>on</u> <u>al</u> <u>Ri</u> <u>sk</u> <u>Re</u> <u>gis</u> <u>tra</u> <u>r</u> <u>(R</u> <u>R</u> <u>R)</u> <u>Id</u> <u>ent</u> <u>ifi</u> <u>er?</u>	https://clpsvs.cloudapps.cisco.com/services/clip/main/transaction/{identifier}

6	^((?i)(edcs)+[-]+\d{4,7})\$	Did you enter a Document Number?	http://wwwin-eng.cisco.com/protected-cgi-bin/edcs/edcs_attr_search.pl?search_type=Doc_No&start=1&per=20&topic_query={identifier}
7	^((?i)(edcs)+[-]+1\d{7,8})\$	Did you enter a Document Number?	https://docs.cisco.com/share/page/site/nextgen-edcs/dp/ws/faceted-search#scope=repo&sortField=Relevance&searchTerm={identifier}

8	^((cve)+[-]\d{4}[-]\d{4}\d+)\$	Did you enter a Cisco Vulnerability Repository URL?	https://sec.cloudapps.cisco.com/security/center/cvr?cveIdList={identifier}#~cve
9	^((AUTOINFRA CALL CE DCS EVS INF ONL OSA NOVUM PROVISION PRO SPARK WBXPLTFM WBXWAP WXI WXS WXCNP VOL PORTAL PRVTCLOUD AMP4E AMPCX AMPCXM AMP4AND PET AMPCSC)+[-]+\d{1,6})\$	Did you enter a JIRA Identifier?	http://jira-eng-gpk2.cisco.com/jira/browse/{identifier}

Topic Search

Advanced Search Tips

Did you enter a CVE? Consider searching **Cisco Vulnerability Repository(CVR)**

☐ Show results based on:

Search Mode:

Simple

Literal

Advanced

Semantic search:

On

Off

View query details

Filters
Data Sources

All
AIX (0)
BDB (0)
BEMS (1)
CDETS (2)
CSOne (52)
More

Data Sources

☒ All
☒ CSOne (52)
☒ CDETS (2)
☒ GRWiki (0)
☒ CX Training (0)
☒ Broadhop (0)
☒ Intucell (0)
☒ Composite (0)
☒ Whiptail (0)
☒ Sourcefire (0)
☒ Ubiquisys (0)
☒ BDB (0)
☒ AIX (0)
☒ Newsgroup (1)
☒ AS Templates (ICT) (0)
☒ BEMS (1)
☒ Cisco.com (0)
☒ Acano (0)
☒ DCP (2)
☒ PSIRT Internal (0)
☒ CliQr (0)
☒ PSIRT External (0)
☒ ServiceGrid (0)
☒ Lancopé (0)
☒ Tech Zone (0)
☒ CIAM (1)
☒ Webex Help Center (0)
☒ Licensing (0)
☒ Broadsoft SVN (0)

1-20 of 59 results from

Past 3 Years
All Time

Simple
Detailed

Sort By
Relevance

CIAM - CVE-2017-13099
CVE-2017-13099 wolfSSL prior to version 3.12.2 provides a weak Bleichenbacher oracle when any TLS cipher suite using RSA key exchange is negotiated. ... An attacker can recover the private key from a vulnerable **wolfSSL** application. This vulnerability is referred to as "ROBOT."
Date: 2023-11-08

SR 690884101 - Vulnerability of CVE-2017-13099 ROBOT
 yinan 2021-02-22 06:56:27 PROBLEM DESCRIPTION Vulnerability of **CVE-2017-13099 ROBOT** yinan 2021-02-24 01:24:25 KT ACTION PLAN **CVE-2017-13099 wolfSSL** prior to version 3.12.2 provides a weak Bleichenbacher ... asked if Expressway hit **CVE-2017-13099 ... CVE-2017-13099 wolfSSL** prior to version 3.12.2 provides a weak Bleichenbacher oracle when any TLS cipher suite using RSA key exchange is negotiated.

SR State: Closed	Company Name: MITSUI KNOWLEDGE IN...	Contract Status: EXPIRED	Owner: yinan
Priority: 4	Problem Code: Product Feature/Function ...	Sub Technology: Expressway-C and E (Do...	Software type: s42700x8_11_4.ova Cisc...
Software Version: X8.11.4	Technology: Telepresence	identifier: 690884101	Date: 2021-02-22
Contract ID: 203110879	Serial Number: FCH1914V0RZ	SR contact name: hironon fuse	Defect Count: 0
Hardware Product: EXPY EXPY EXPY-C...	Additional Email: tec-vs31-ml-dg@mki.co...		

Ref Links: BDB (1) ▼ BEMS (1) ▼ C3 (2) ▼ CDETS (2) ▼ CVE (5) ▼
 [Show Related Results](#) | [Cached](#) | [Preview](#)

SR 693605942 - Vulnerabilities in Expressway E & C and CMS
 disabled SSLv2 so is not affected]] 9-**CVE-2017-13099 wolfSSL** prior to version 3.12.2 provides a weak Bleichenbacher oracle when any TLS cipher suite using RSA key exchange is negotiated. ... disabled SSLv2 so is not affected]] 9-**CVE-2017-13099 wolfSSL** prior to version 3.12.2 provides a weak Bleichenbacher oracle when any TLS cipher suite using RSA key exchange is negotiated. ... disabled SSLv2 so is not affected]] 9-**CVE-2017-13099 wolfSSL** prior to version 3.12.2 provides a weak Bleichenbacher oracle when any TLS cipher suite using RSA key exchange is negotiated.

SR State: Closed	Company Name: AL RAJHI BANKING AND...	Contract Status: ACTIVE	Owner: dkasasbe
Priority: 3	Problem Code: Interoperability	Sub Technology: Expressway-C and E (Do...	Software type: s42700x12_5_6.tar.gz Cisc...
Software Version: X12.5.6	Technology: Telepresence	identifier: 693605942	Date: 2022-05-19
Contract ID: 203201550	Serial Number:	SR contact name: Tarek Alamoudi	Defect Count: 0
Hardware Product: EXPY EXPY EXP-EDG...	Additional Email: CheriyaSPo@alrajhibank...		

Ref Links: CDETS (5) ▼ CVE (3) ▼
 [Show Related Results](#) | [Cached](#) | [Preview](#)

BEMS - QA about if hits TLS ROBOT Vulnerability [After disabling RSA, TLS ROBOT Vulnerability was detected again].
 ~2012-5081, **CVE-2016-6883**, **CVE-2017-6168**, **CVE-2017-1000385**, **CVE-2017-13098**, **CVE-2017-13099**, **CVE-2017-17382**, **CVE-2017-17427**, **CVE-2017-17428**, **CVE-2017-12373** TLS ROBOT Vulnerability TCP Sequence Number Approximation ... ~2012-5081, **CVE-2016-6883**, **CVE-2017-6168**, **CVE-2017-1000385**, **CVE-2017-13098**, **CVE-2017-13099**, **CVE-2017-17382**, **CVE-2017-17427**, **CVE-2017-17428**, **CVE-2017-12373** TLS ROBOT Vulnerability TCP Sequence Number Approximation ... ~2017-13098: BouncyCastle TLS prior to version 1.0.3, when configured to use the JCE (Java Cryptography Extension) [Expressway does not include bouncycastle TLS] **CVE-2017-13099 wolfSSL** prior to version

Creation Date: 2021-02-10	Product Family: Expressway	SR Number: 690757682	BEMS Case Number: BEMS01205065
----------------------------------	-----------------------------------	-----------------------------	---------------------------------------



Simple View/Detailed View

By default, all users would have the "*Detailed View*" selected, in this view, all the metadata for a result will get displayed. Clicking the "*Simple View*" button would collapse the metadata section for every result. The user can switch between these two views and the latest option would be saved in the user's profile so all further searches will retain it.

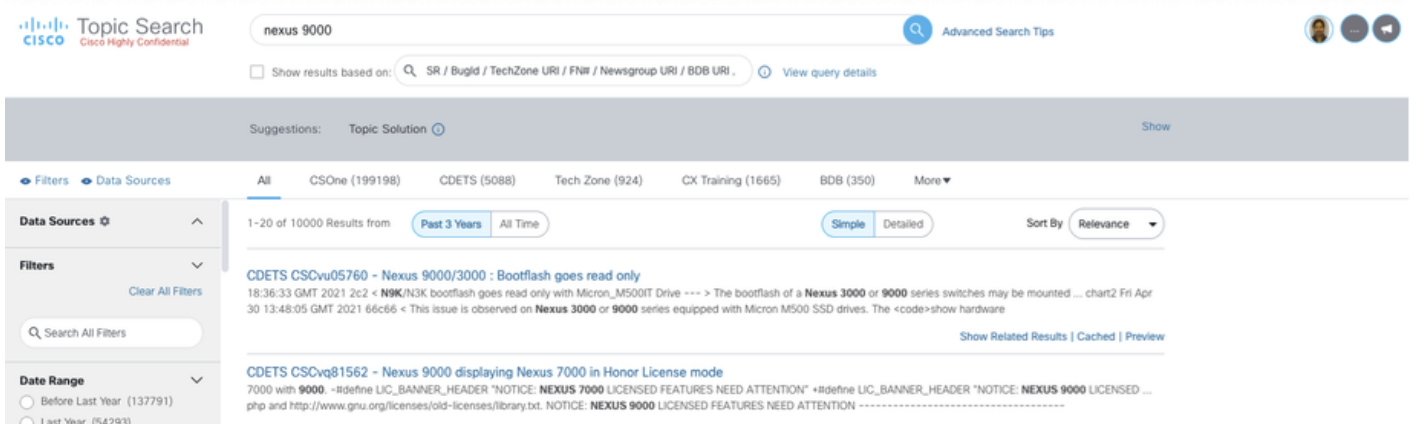


Figure: Simple View

Figure: Detailed View

Known Limitation: In the detailed view, when metadata field values are long, the entire value will not be displayed; the value will be displayed as per the column length and terminate with ellipses. E.g., subtech field value

SR 690756681 - Prime Infrastructure can't show client count when use Unified AP Monitor

@cisco.com wrote: ----- To: "mailto:cisco@samtel.com cisco@samtel.com" <mailto:cisco@samtel.com cisco ... Cc: "Cisco Sct" <cisco@samtel.commailto:cisco@samtel.com>>, "attach@cisco.commailto:attach@cisco.com ... <mailto:rduvada@cisco.com>> Cc: Cisco Sct <cisco@samtel.commailto:cisco@samtel.com>>, "attach@cisco.com


SR state: Closed	Company: MINISTRY OF JUSTICE	Contract status: ACTIVE	Owner: rduvada
Priority: 3	Problem Code: Error Messages, Logs,...	Resolution Code: Software Configuration	Sub Technology: Prime Infrastructure 3.7...
SW Product Type: PRIME...	Software version: 3.7	Technology: NMS (Network Management...	Date: 2021-02-02
Contract ID: 201824289	Status: Closed	SR contact name: Cisco Samart Comtech	Defect Count: 0
Hardware Product: N/A N/A NA - NMS	additionalemail: ...		

Workaround: Please view the cached file for the result, in case you need to see the full value of these fields

Collapsed Left


The left section of the page can be collapsed/expanded by clicking on the "Filters" and "Data sources" buttons.

Results page with left navigators collapsed is shown below.

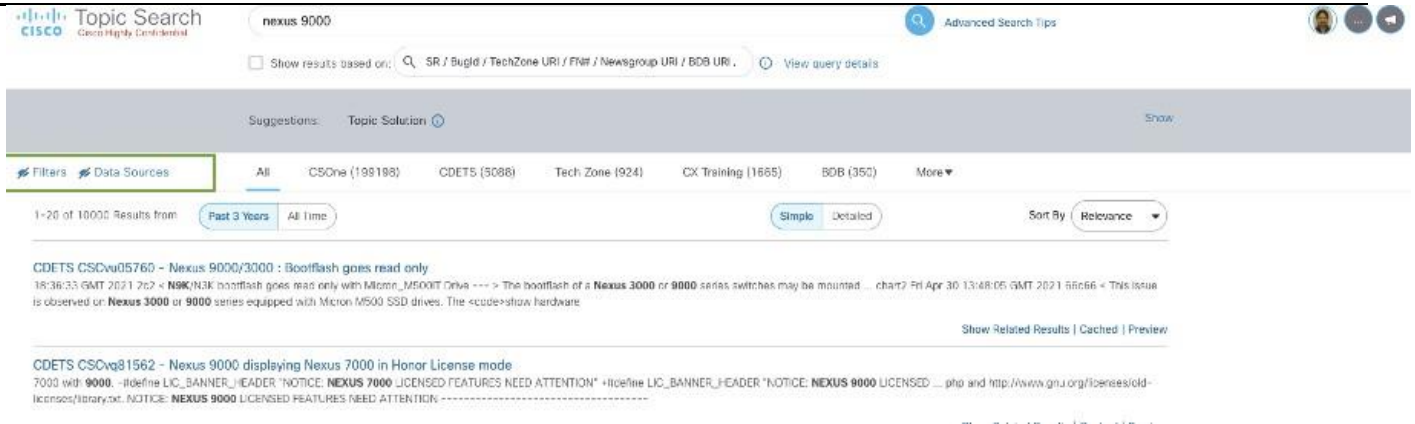

Export to Excel

Topic Search application allows you to export the search results for any query. You can click on the "Export" icon to get started. Topic results downloaded are **Highly Confidential**.

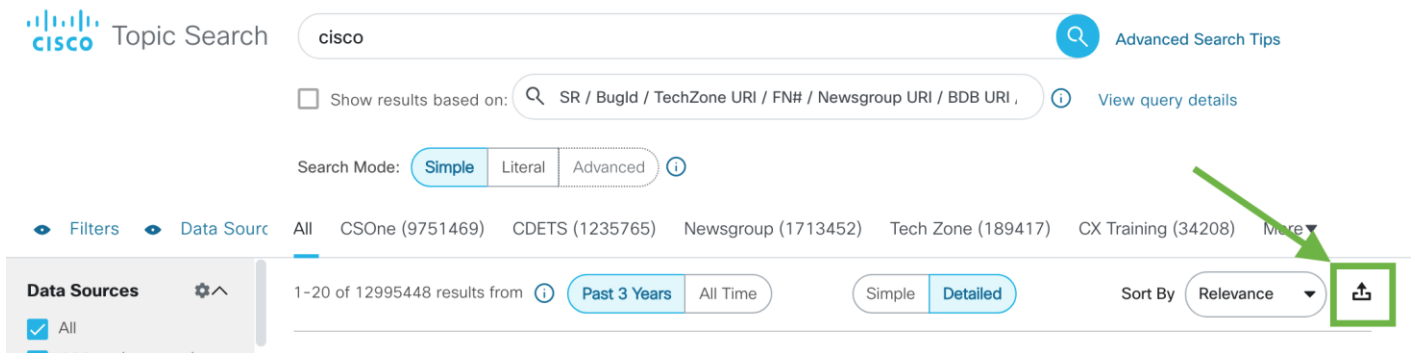

This will export the top 1000 results for the query as an excel file. The following fields will be included

- Title
- Collection (which indicates the data source type)
- Date (in YYYY-MM-DD hh:mm:ss format)
- Snippet (a dynamic teaser text from the result)

CISCO HIGHLY CONFIDENTIAL									
Topic BDB Search Results									
Download from Individual DS Tab Results (e.g. BDB)									
Note: Entries in the Title column are clickable 1000 of 9383 hits displayed below									
Title	Snippet	Last Updated Date	Author	Language	Usage	Addition	Trending	Creation Date	Tags
ipic_em_pod_state_chk	import bdblib from borg	2024-06-17 01:11:39	yukoga,yushimaz,kkajur	borg_module	0			2024-04-16 02:11:02	Automation,Diagnostic_Signature,APIC_EM
atc_dr_status	from borg3.result impor	2023-11-01 15:51:58	karanand	borg_module	0			2023-10-26 19:01:25	Automation,Diagnostic_Signature,APIC_EM
ipic_em_ntp_chk	import bdblib from borg	2024-06-17 01:08:44	yukoga,yushimaz,kkajur	borg_module	0			2024-03-27 03:07:45	Automation,Diagnostic_Signature,APIC_EM
pof_parser_error_check	from borg3.result impor	2023-11-03 16:34:15	karanand	borg_module	0			2023-10-26 15:45:37	APIC_EM,Diagnostic_Signature,Automation
fnac_rabbitmq_partition	from borg3.result impor	2023-06-28 17:07:18	karanand	borg_module	0			2023-06-28 16:03:35	Automation,APIC_EM,Diagnostic_Signature
fnac_node_status	from borg3.result impor	2023-07-02 00:29:08	karanand	borg_module	0			2023-06-28 17:34:14	Automation,APIC_EM,Diagnostic_Signature
ipic_em_vip_chk	import bdblib from borg	2024-06-17 01:07:44	yukoga,yushimaz,kkajur	borg_module	0			2024-03-22 09:12:05	Automation,Diagnostic_Signature,APIC_EM
atc_workflow_status	from borg3.result impor	2023-11-02 15:38:34	karanand	borg_module	0			2023-10-26 17:02:09	Automation,Diagnostic_Signature,APIC_EM
ATC_missing_memory	from borg3.result impor	2023-10-30 18:27:42	andporra	borg_module	0			2023-10-26 16:11:49	APIC_EM,Automation,Diagnostic_Signature
fnac_dns_count_check	from borg3.result impor	2023-07-11 00:59:37	karanand	borg_module	0			2023-07-02 00:34:05	APIC_EM,Diagnostic_Signature,Automation
nventory_netconf_rpc	from borg3.result impor	2023-11-02 15:30:16	karanand	borg_module	0			2023-10-26 11:37:51	Automation,Diagnostic_Signature,APIC_EM
nventory_jdbc_check	from borg3.result impor	2023-11-02 15:20:13	karanand	borg_module	0			2023-10-25 17:34:30	APIC_EM,Diagnostic_Signature,Automation
herlock_process_device	import logging import js	2024-03-18 21:51:08	psimien,ricguzma,psimie	python3.11	0			2024-03-18 14:43:30	
trinath_dnac_check	from borg3.result impor	2023-06-29 15:47:15	orphan.gen	borg_module	0			2023-06-29 15:22:50	APIC_EM,Diagnostic_Signature,Automation
CISCO HIGHLY CONFIDENTIAL									
Topic Search Results									
Download from "All" Tab results									
Note: Entries in the Title column are clickable 1000 of 2013 hits displayed below									
Title	Collection	Date	Snippet						
abric interface asic ASI	Gnosis	2021-07-14 20:47:07	60ef464b76146c0123d32986 binho diag_command_based_advanced_xr DIAGNOSTIC rthiku INTERNAL_USE syslog Fabric interface asic ASICEncountered fatal fault 0x0 - DDR BIST FAILURE show logging This is DDR ... Fabric interface asic ASI						
xanic DDR questions	BEIMS	2021-06-01 04:32:34	BEM501254967 Exanic DDR questions Numerous questions regarding addressing DDR using FDK. 1. DDR Addressing Query : a. What is the addressing method followed? I. Word Addressing li. ... What is the first and last DDR address? c. Synthesize						
DDR Planning	IT Wiki	2022-01-12 11:08:51	Installing LM and DDR LM DDR - DDR Python User Guide CLIPS RULES DEVELOPMENT DEMO: https://cisco.webex.com/cisco/fdk.php? ... C-CD framework Frederic Detienne DDR Use Case Development Automation Web-based framework to fac						
DDR automatic calibration	Gnosis	2022-06-27 08:45:17	MEM_DDR-1-AC_ERR Jan 23 09:02:40.108 <<ipaddress>> : %MEM_DDR-1-AC_ERR: [chars]: DDR automatic calibration error detected at XXXXXTHIS IS A SAMPLE MESSAGE ... Most probably it indicates a malfunctioning DDR (Double data rate) r						
DDR bus data bit got stu	Gnosis	2022-06-03 11:13:01	BRIDGE-1-DDR_BUS_BIT_STUCK_0 Jan 23 09:02:40.108 <<ipaddress>> : %BRIDGE-1-DDR_BUS_BIT_STUCK_0: DDR bus data bit stuck-X THIS IS A SAMPLE MESSAGE ... 6299ecbd7f15c9853e5dbae49 kramakri syslog_basic SYSLOG PUBLISHED rule1						
DDR memory select error	Gnosis	2021-05-04 21:54:50	MEM_DDR-0-M5_ERR Jun 09 08:14:39 <<ipaddress>> : %MEM_DDR-0-M5_ERR : DDR Memory Select error detected at xxxxxxx THIS IS A SAMPLEMESSAGE ... 6091c2aaa1eeec02d0705768 kurathod syslog_basic SYSLOG jarita redivaka chinjosh						
bailey: Add 16GB Micron	Jira Webex	2022-04-06 09:02:25	We will be using the same dram strap (2) as used by Xavier NX for this DDR type. This requires a BOM change in resistor on modulealong with new DDR type. ... CE-90384 Bailey: Add 16GB Micron + Hynix DDR support (same as supported on Xavi						
P-DDR initialization fail	Gnosis	2021-04-28 16:19:51	CMRR-0-DDR_INITIALIZATION Apr 15 07:39:16 <<ipaddress>> %CMRR-0-DDR_INITIALIZATION: The RP DDR has failed initialization becauseofchacal THIS IS A SAMPLE MESSAGE ... 60898b27a1eeec02d0705768 kurathod syslog_basic SYSLOG PUBLISHED rule1						

Note: This export can take a bit of time to execute. The snippet can include html encoded characters

Result specific functions

Every result, depending on which data source it belongs to, will have the following functions

Highlighting (Snippet Behavior)

Topic search provides a highlighting capability that allows users to see why the document matched their query. This helps when the query string is exceedingly long and there are only partial matches.

Highlighting Limitations

1. The snippet highlighting logic is different from the search logic.
2. The order in which the query is entered affects the highlighting of the snippets. The query can be restructured or reordered to get relevant results and improved snippet highlighting.

for e.g., **microsoft fabric_6 label** => On the first page of the results, there are a few instances of **fabric_6** highlighted in the snippets. There are **14574** results returned for this query.

"fabric_6" microsoft label => On the first page of the results, there are more instances of **"fabric_6"** highlighted in the snippets compared to the above keyword. There are only **118** results returned for this query.

Special characters are treated as spaces in Simple and Advanced Search, so they match **fabric_6 / _fabric-6 / fabric 6** etc.

The image displays two side-by-side screenshots of the Cisco Topic Search interface. Both screenshots show a search results page with various filters and a list of search results. The left screenshot shows results for the query 'SR 695463476 - ovr02.waw02 incorrect label programming'. The right screenshot shows results for the query 'SR 695746820 - *Dumping Core File : iad02-0101-0200-13t2, CorrelationId: GSHealth/DumpingCore'. Both screenshots show a list of search results with details such as the search ID, title, and a snippet of the document content. The interface includes a sidebar with filters for Data Sources, Filters, Date Range, and CSOne - Resolution Code. The search results are displayed in a table-like format with columns for the search ID, title, and snippet.

3. When using *Fielded Search* highlighted text, there **will not** be any highlighted text available in the meta data except for the fields **resolutionsummary**, **problemdescription**, **description**, **actionplan** & **customersymptom**. However, when fielded search is used along with other query types, highlighting of results will be available; In such a scenario it might appear that parts of documents highlighted do not correspond to query matches

Note: Fielded searches that contain special characters like (,) will not be highlighted.

- Highlighters do not reflect the *Boolean* logic of a query when extracting terms to highlight. Thus, for some complex Boolean, parts of documents may be highlighted that do not correspond to query matches.
- When using *Literal search*, there could be a scenario where, in addition to the exact literal, portions of the literal string could be highlighted separately – if they are present in the document. e.g., a) "**num_labels=1,**" (*From Advanced Search to Literal Search mode*) => In Literal Search, keywords can be highlighted in the snippets separately, but the result document must contain the exact literal.

CISCO HIGHLY CONFIDENTIAL

Advanced Search Tips

☐ Show results based on: SR / BugId / TechZone URI / FNN / Newsgroup URI / BDB URI
View query details

Search Mode: Simple **Literal** Advanced

All CSONe (1) CDETS (18) Newsgroup (0) Tech Zone (10) CX Training (0) More ▾

1-20 of 29 results from Past 3 Years All Time
Simple **Detailed**
Sort By: Relevance

Tech Zone - ISIS crash in latest r76x

=30, load_metric=0, rib_rtype=64, path_id=1 \"001\", **num_labels=1**, label_stack=0x7fc05fa7ad9c, srv6_sid_list=0x0, rib_source_address=0x7fc0400106a8, is_mcast_intact=0, path_msg=0xc1a19c \"frr backup\", backup ... ; **num_labels=1**, label_stack=0x7fc05fa7ad9c, srv6_sid_list=0x0, rib_source_address=0x7fc0400106a8, is_mcast_intact=0, path_msg=0xc1a19c \"frr backup\", backup=0x1222360, pg_node=0x0, own_net=0x1136d30, real_frst_hop ... -1638958384.core.gz Local copy of same files: /auto/http-crstme/ssidor/isis_ip_rib_batch_buffer_add_path/ rtrB_0_1_CPU0_tmp_isis-12549-1638958384.core.gz rtrB_0_1_CPU0_tmp_isis-12549-1638958384.core.txt

Author: ssidor **Board:** IOS XR PI IS-IS Eng **Count of Linked SRs:** 0 **State:** Closed
Style: forum **Date:** 2021-12-08 **Views:** 20 **Kudos:** 0
Replies: 5

Ref Links: CDETS (1) ▾ Show Related Results | Preview

Tech Zone - fia_driver crash on J1 LC 133i + V1 smu

-6.5.16/tp-035/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:4587 #15 0x00007fda3791db9b in bcm_mpls_tunnel_initiator_create (unit=0, intf=0, **num_labels=1**, label_array=0x7fd9ba6beaa0) ... /fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:4561 #14 0x00007fda355bb16e in bcm_petra_mpls_tunnel_initiator_create (unit=0, intf=0, **num_labels=1**, label_array=0x7fd9ba6beaa0) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-035/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:4044 #13 0x00007fda355bafd4 in _bcm_petra_mpls_tunnel_initiator_set (unit=0, intf=0, **num_labels=1**, label_array=0x7fd9ba6beaa0) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-035/thirdparty/broadcom-pp

Author: ramarr **Board:** IOS XR PD NCS5500 QoS Discussi... **Count of Linked SRs:** 0 **State:** Closed
Style: forum **Date:** 2019-05-02 **Views:** 1201 **Kudos:** 0
Replies: 1

Ref Links: CDETS (2) ▾ Show Related Results | Preview

Tech Zone - 712: fia_driver crash on Jplus LC on Fretta with mpls encap scale

(unit=0, intf=0, **num_labels=1**, label_array=0x7f24d342e9e8) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-r71x-49/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:4595 #15 0x00007f254fb5ef18 ... in bcm_mpls_tunnel_initiator_create (unit=unit@entry=0, intf=intf@entry=0, **num_labels=num_labels**, label_array=label_array@entry=0x7f24d342e9e8) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-r71x-49 ... at /auto/panini-projs2/brcm-sdk-6.5.16/tp-r71x-49/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:4229 #13 0x00007f254ded882b in _bcm_petra_mpls_tunnel_initiator_set (unit=0, intf=0, **num_labels**

Author: ramarr **Board:** IOS XR PD NCS5500 L3FIB Eng **Count of Linked SRs:** 0 **State:** Closed
Style: forum **Date:** 2020-08-06 **Views:** 55 **Kudos:** 0
Replies: 5

Ref Links: CDETS (1) ▾ TZ (2) ▾ Show Related Results | Preview

Tech Zone - 652: fia_driver crashed at sw_state_dpp_soc_sand_hash_table_hashes_array_hash_data_next_memread ()

in bcm_mpls_tunnel_initiator_create (unit=unit@entry=0, intf=intf@entry=0, **num_labels=1**, label_array=label_array@entry=0x7f1dd5adeae0) at /auto/panini-projs/fabric/brcm-sdk-6.5.9/tp-r65x- ... (unit=0, intf=0, **num_labels=1**, label_array=0x7f1dd5adeae0) at /auto/panini-projs/fabric/brcm-sdk-6.5.9/tp-r65x-66/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:4188 #14 0x00007f1e27b55e78 ... /panini-projs/fabric/brcm-sdk-6.5.9/tp-r65x-66/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mppls.c:3702 #12 0x00007f1e25fd186b in _bcm_petra_mpls_tunnel_initiator_set (unit=0, intf=0, **num_labels**

Author: mbellign **Board:** IOS XR PD NCS5500 L3FIB Eng **Count of Linked SRs:** 0 **State:** Closed
Style: forum **Date:** 2018-12-13 **Views:** 512 **Kudos:** 0
Replies: 0

e.g., b) **num_labels=1,** (*From Simple search to Literal Search mode*)

CISCO HIGHLY CONFIDENTIAL

Advanced Search Tips

☐ Show results based on: SR / BugId / TechZone URI / FNR / Newsgroup URI / BDB URI
[View query details](#)

Search Mode: Simple Literal Advanced

All CSOne (1) CDETS (18) Newsgroup (0) Tech Zone (10) CX Training (0) More ▼

1-20 of 29 results from Past 3 Years All Time

Simple Detailed

Sort By Relevance

Tech Zone - ISIS crash in latest r76x

=30, load_metric=0, rib_type=64, path_id=1 \001: num_labels=1, label_stack=0x7fc05fa7ad9c, srv6_sid_list=0x0, rib_source_address=0x7fc0400106a8, is_mcast_intact=0, path_msg=0xc1a19c "frr backup", backup ... ; num_labels=1, label_stack=0x7fc05fa7ad9c, srv6_sid_list=0x0, rib_source_address=0x7fc0400106a8, is_mcast_intact=0, path_msg=0xc1a19c "frr backup", backup=0x1222360, pg_node=0x0, own_net=0x1136d30, real_first_hop ... -1638958384 core gz Local copy of same files: /auto/http-crmtime/ssidor/isis_ip_rib_batch_buffer_add_path/ rtrB_0_1_CPU0_tmp_isis-12549-1638958384 core gz rtrB_0_1_CPU0_tmp_isis-12549-1638958384 core.txt

Ref Links: [CDETS \(1\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - fia_driver crash on J1 LC 133i + V1 smu

-6.5.16/tp-035/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:4587 #15 0x00007da3791db9b in bcm_mpls_tunnel_initiator_create (unit=0, intf=0, num_labels=1, label_array=0x7fd9ba6bea0) ... /fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:4561 #14 0x00007da355bb16e in bcm_petra_mpls_tunnel_initiator_create (unit=0, intf=0, num_labels=1, label_array=0x7fd9ba6bea0) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-035/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:4044 #13 0x00007da355baf04 in _bcm_petra_mpls_tunnel_initiator_set (unit=0, intf=0, num_labels=1, label_array=0x7fd9ba6bea0) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-035/thirdparty/broadcom-pp

Ref Links: [CDETS \(2\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - 712: fia_driver crash on Jplus LC on Fretta with mpls encaps scale

(unit=0, intf=0, num_labels=1, label_array=0x724d342e9e8) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-r71x-49/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:4595 #15 0x00007254f5ef18 ... in bcm_mpls_tunnel_initiator_create (unit=unit@entry=0, intf=intf@entry=0, num_labels=num_labels@entry=1, label_array=label_array@entry=0x724d342e9e8) at /auto/panini-projs2/brcm-sdk-6.5.16/tp-r71x-49 ... at /auto/panini-projs2/brcm-sdk-6.5.16/tp-r71x-49/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:4229 #13 0x00007f254ded882b in _bcm_petra_mpls_tunnel_initiator_set (unit=0, intf=0, num_labels=1, label_array=0x7fd9ba6bea0)

Ref Links: [CDETS \(1\)](#) [TZ \(2\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - 652: fia_driver crashed at sw_state_dpp_soc_sand_hash_table_hashes_array_hash_data_next_memread ()

in bcm_mpls_tunnel_initiator_create (unit=unit@entry=0, intf=intf@entry=0, num_labels=1, label_array=label_array@entry=0x7f1dd5adeae0) at /auto/panini-projs/fabric/brcm-sdk-6.5.9/tp-r65x-66/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:4188 #14 0x00007f1e27b55e78 ... /panini-projs/fabric/brcm-sdk-6.5.9/tp-r65x-66/thirdparty/broadcom-pp/fabric/sources/bcmsdk/src/bcm/dpp/mpis.c:3702 #12 0x00007f1e25f186b in _bcm_petra_mpls_tunnel_initiator_set (unit=0, intf=0, num_labels=1, label_array=0x7fd9ba6bea0)

Ref Links: [CDETS \(2\)](#) [TZ \(5\)](#) [Show Related Results](#) | [Cached](#) | [Preview](#)

Tech Zone - SIT:652:30i: continuous fia_driver crash on Zermatt upon loading 30i

ingress@entry=0) at platforms/common/bcm-dpa/sdk/dnx/src/dnxsdk_j2.c:9981 #16 0x00007f6fe311130c in dnxsdk_mpls_encap_create (trans_id=1836459, unit=unit@entry=0,

- When using *Phrase search*, there could be a scenario where, in addition to the exact literal, portions of the literal string could be highlighted separately – if they are present in the document. e.g., a) "**num_labels=1,**" => Keywords can be highlighted separately in the snippets during Advanced Search, but the result document contains the keywords in that same order close to each other. However, the special characters can be substituted with the same or different special character.

CISCO HIGHLY CONFIDENTIAL

☐ Show results based on:

Search Mode:

Suggestions:

All
 CSOne (248)
 CDETS (1119)
 Newsgroup (125)
 Tech Zone (728)
 CX Training (19)
 More ▼

1 - 20 of 2239 results from

Sort By

Tech Zone - J2: 7.8.1.261: continuous fib_mgr: %PLATFORM-PLAT_FIB-3-HW_PROG_ERROR : HW Programming failed for table,mplsnh,failure-reason,InvalidParam

.1,mpls_encap_id,0x400264ca,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0 Sep 6 13:55:44.065 dnx_fib_lwldi_event 0/3/CPU0 t4255 TP508,dpa_mplsnh_update_success,trans_id,2220516,dpa_trans_id,3767501,num_labels ...,1,mpls_encap_id,0x400264ca,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0 Sep 6 13:55:44.071 dnx_fib_lwldi_event 0/3/CPU0 t4255 TP508,dpa_mplsnh_update_success,trans_id,2220611,dpa_trans_id,3767787,num_labels1,mpls_encap_id,0x400264ca,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0 Sep 6 13:55:44.388 dnx_fib_lwldi_event 0/3/CPU0 t4255 TP508,dpa_mplsnh_update_success,trans_id,2221158,dpa_trans_id,3768598,num_labels

Ref Links: [C3 \(1\)](#) [CDETS \(1\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - 7.8.22.002: J+: fib_mgr[133]: %PLATFORM-PLAT_FIB-3-HW_PROG_ERROR : HW Programming failed for table,mplsnh,failure-reason,EnNotFound

.96359690,num_labels.1,mpls_encap_id,0x4001346c,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x9 Jan 22 03:39:32.192 dnx_fib_retry_event 0/0/CPU0 t4669 TP512,dpa_mplsnh_update_success,trans_id,50945027 ... num_labels.1,mpls_encap_id,0x4001346c,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x9 Jan 22 03:39:17.192 dnx_fib_retry_event 0/0/CPU0 t4669 TP512,dpa_mplsnh_update_success,trans_id,50944317,dpa_trans_id ... ,dpa_trans_id,96363088,num_labels.1,mpls_encap_id,0x4001346c,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x9 Jan 22 03:39:47.192 dnx_fib_retry_event 0/0/CPU0 t4669 TP512,dpa_mplsnh_update_success,trans_id

Ref Links: [C3 \(1\)](#) [CDETS \(1\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - 762 Video: fib_mgr - HW Programming failed for table,mplsnh,key,unit,0,dpa_trans_id,failure-reason,InternalEr

0/1/CPU0 t4377 TP488,dpa_mplsnh_create_success,trans_id,238977,dpa_trans_id,225311,num_labels.1,mpls_encap_id,0x4001444d,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x8 Aug 11 23:13:00.946 dnx_fib_lwldi_event ... 0/1/CPU0 t4377 TP488,dpa_mplsnh_create_success,trans_id,238977,dpa_trans_id,225312,num_labels.1,mpls_encap_id,0x4001444f,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x8 Aug 11 23:13:00.946 dnx_fib_lwldi_event ... 0/1/CPU0 t4377 TP488,dpa_mplsnh_create_success,trans_id,238977,dpa_trans_id,225313,num_labels.1,mpls_encap_id,0x40014451,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x8 Aug 11 23:13:00.946 dnx_fib_lwldi_event

Ref Links: [CDETS \(5\)](#) [TZ \(1\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - MTB GB: L3VPN traffic blackholing due to outgoing labels missing on 7315.8l GISO

0 num_labels[1]: 1 label_array[1]: 3001 encap_id[1]: ffffffff b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id[1]: 0 is_protected[2]: 0 num_labels[2]: 1 label_array[2]: 4001 encap_id[2]: ... [0]: bkup_encap_id[0]: 0 is_protected[1]: 0 num_labels[1]: 1 label_array[1]: 24549 encap_id[1]: ffffffff b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id[1]: 0 is_protected[2]: 0 num_labels ... [0]: bkup_encap_id[0]: 0 is_protected[1]: 0 num_labels[1]: 1 label_array[1]: 33680 encap_id[1]: ffffffff b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id[1]: 0 is_protected[2]: 0 num_labels

Ref Links: [C3 \(1\)](#) [CDETS \(1\)](#) [Show Related Results](#) | [Preview](#)

Tech Zone - 8800: (bgp pic and ti-ifa) Shutting down remote or local interface of active primary path shows 1200ms packet loss for IPv6

bkup_path_id[0]: 0 is_protected[1]: 1 num_labels[1]: 1 label_array[1]: 27032 encap_id[1]: ffffffff path_id[1]: 10000100000002 b_num_labels[1]: 1 bkup_label_array[1]: ... [0]: 5dc400000001 is_protected[1]: 1 num_labels[1]: 1 label_array[1]: 3 encap_id[1]: ffffffff path_id[1]: 5dc400000001 b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id ... [0]: 5dc800000001 is_protected[1]: 1 num_labels[1]: 1 label_array[1]: 3 encap_id[1]: ffffffff path_id[1]: 5dc800000001 b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id

e.g., b) "num_labels\$1," => Here the \$ matches to any special character (i.e., [

Cisco Confidential

7. When using *Simple search*, there could be a scenario where the snippets could be highlighted independently or in accordance with the query. e.g., a) **num_labels=1**, => During Simple search, it is possible to highlight keywords separately in the snippets.

CISCO HIGHLY CONFIDENTIAL

☐ Show results based on:

Search Mode: Simple Literal Advanced

Suggestions: SR Resolution Summaries Show

All CSOne (8377) CDETS (27429) Newsgroup (1227) Tech Zone (4267) CX Training (319) More ▼

1-20 of 42755 results from Past 3 Years All Time
Simple Detailed
Sort By Relevance

Tech Zone - J2: 7.8.1.261: continuous fib_mgr: %PLATFORM-PLAT_FIB-3-HW_PROG_ERROR : HW Programming failed for table,mplsnh,failure-reason,InvalidParam

,1,mpls_encap_id,0x400264ca,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0 Sep 6 13:55:44.065 dnx_fib_lwldi_event 0/3/CPU0 t4255 TP508,dpa_mplsnh_update_success,trans_id,2220516,dpa_trans_id,3767501,num_labels ... ,1,mpls_encap_id,0x400264ca,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0 Sep 6 13:55:44.071 dnx_fib_lwldi_event 0/3/CPU0 t4255 TP508,dpa_mplsnh_update_success,trans_id,2220611,dpa_trans_id,3767787,num_labels ... ,1,mpls_encap_id,0x400264ca,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0 Sep 6 13:55:44.388 dnx_fib_lwldi_event 0/3/CPU0 t4255 TP508,dpa_mplsnh_update_success,trans_id,2221158,dpa_trans_id,3768598,num_labels

Ref Links: C3 (1) CDETS (1) Show Related Results | Preview

Tech Zone - 7.8.22.021: J+: fib_mgr[133]: %PLATFORM-PLAT_FIB-3-HW_PROG_ERROR : HW Programming failed for table,mplsnh,failure-reason,EnNotFound

,96359690,num_labels,1,mpls_encap_id,0x4001346c,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x9 Jan 22 03:39:32.192 dnx_fib_retry_event 0/0/CPU0 t4669 TP512,dpa_mplsnh_update_success,trans_id,50945027 ... ,num_labels,1,mpls_encap_id,0x4001346c,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x9 Jan 22 03:39:17.192 dnx_fib_retry_event 0/0/CPU0 t4669 TP512,dpa_mplsnh_update_success,trans_id,50944317,dpa_trans_id ... ,dpa_trans_id,96363088,num_labels,1,mpls_encap_id,0x4001346c,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x9 Jan 22 03:39:47.192 dnx_fib_retry_event 0/0/CPU0 t4669 TP512,dpa_mplsnh_update_success,trans_id

Show Related Results | Preview

Tech Zone - 762 Video: fib_mgr - HW Programming failed for table,mplsnh,key,unit,0,dpa_trans_id,failure-reason,InternalEr

0/1/CPU0 t4377 TP488,dpa_mplsnh_create_success,trans_id,238977,dpa_trans_id,225311,num_labels,1,mpls_encap_id,0x4001444d,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x8 Aug 11 23:13:00.946 dnx_fib_lwldi_event ... 0/1/CPU0 t4377 TP488,dpa_mplsnh_create_success,trans_id,238977,dpa_trans_id,225312,num_labels,1,mpls_encap_id,0x4001444f,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x8 Aug 11 23:13:00.946 dnx_fib_lwldi_event ... 0/1/CPU0 t4377 TP488,dpa_mplsnh_create_success,trans_id,238977,dpa_trans_id,225313,num_labels,1,mpls_encap_id,0x40014451,action,MPLS_PUSH,num_encap_ids,1,nh_npu_mask,0x8 Aug 11 23:13:00.946 dnx_fib_lwldi_event

Ref Links: CDETS (5) TZ (1) Show Related Results | Preview

Tech Zone - MTB GB: L3VPN traffic blackholing due to outgoing labels missing on 7315.8I GISO

0 num_labels[1]: 1 label_array[1]: 3001 encap_id[1]: ffffffff b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id[1]: 0 is_protected[2]: 0 num_labels[2]: 1 label_array[2]: 4001 encap_id[2]: ... [0]: bkup_encap_id[0]: 0 is_protected[1]: 0 num_labels[1]: 1 label_array[1]: 24549 encap_id[1]: ffffffff b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id[1]: 0 is_protected[2]: 0 num_labels ... [0]: bkup_encap_id[0]: 0 is_protected[1]: 0 num_labels[1]: 1 label_array[1]: 33680 encap_id[1]: ffffffff b_num_labels[1]: 0 bkup_label_array[1]: bkup_encap_id[1]: 0 is_protected[2]: 0 num_labels

Ref Links: C3 (1) CDETS (1) Show Related Results | Preview

Cached links

This feature allows the user to view the full cached pages for CSOne and CDETS documents in a new tab. For every document from these two data sources, the icon is present on the top right corner as shown below

CDETS CSCvs72572 - High CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB

gateway=NXOSSSTP&module=BORG_NXOS_CSCvs72572_High_CPU_Nexus_9000_running_VXLAN_due_to_high_IPFIB&sr=687294611& ... CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB. ... CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB::CSC.datacenter Hi, I am currently evaluating

Component: vxlan-nve
Integrated-releases: ...
Severity: severe
Linked SRs: 3
Major version: 9.3

DE-manager: sabadala
Last-changed: 2021-04-28
Status: V
Bug is OIB: false
identifier: CSCvs72572

Engineer: sabadala
Product: n9k-standalone-sw
Submitter-id: sonag
Bug has Diff: false
Date: 2020-01-18

Found: customer-use
Project: CSC.datacenter
Versions: 9.3(3)
Bug is SS: false
Trouble Tickets:
[BEMS01007553](#)
[687607218](#) [688280045](#)
Customer Visible: Y

Attribute: citi-fixed-...
relateddefects:...

Resolved-on: 2020-02-25

Tickets Count Direct: 3

Ref Links: BEMS (1) C3 (5) CDETS (5) NEWS (3) TZ (1)

Show Related Results Cached Preview

Note: Temporary Limitation for December 2021: There could be a scenario where the cache file is not updated at the time the search is performed and keywords searched for are not present in the cache file. The cache file will be updated and eventually consistent.

Preview

On click of "Preview" link right navigator slides open to show preview details. It is available for all CSOne, CDETS, Techzone and Newsgroup data source results. Click on "close" or click outside the navigator to hide the popup.

CDETS CSCvs72572 - High CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB

gateway=NXOSSSTP&module=BORG_NXOS_CSCvs72572_High_CPU_Nexus_9000_running_VXLAN_due_to_high_IPFIB&sr=687294611&... CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB, ... CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB::CSC.datacenter Hi, I am currently evaluating

Component: vxlan-nve
Integrated-releases:...
Severity: severe
Linked SRs: 3
Major version: 9.3

DE-manager: sabadala
Last-changed: 2021-04-28
Status: V
Bug is OIB: false
identifier: CSCvs72572

Engineer: sabadala
Product: n9k-standalone-sw
Submitter-id: sonag
Bug has Diffs: false
Date: 2020-01-18

Found: customer-use
Project: CSC.datacenter
Versions: 9.3(3)
Bug is SS: false
Trouble Tickets:
[BEMS01007553](#)
[687607218](#) [688280045](#)
Customer Visible: Y


Attribute: citi-fixed-...
relateddefects:...

Resolved-on: 2020-02-25

Tickets Count Direct: 3

Ref Links: [BEMS \(1\)](#) [C3 \(5\)](#) [CDETS \(5\)](#) [NEWS \(3\)](#) [TZ \(1\)](#)

[Show Related Results](#) | [Cached](#) [Preview](#)

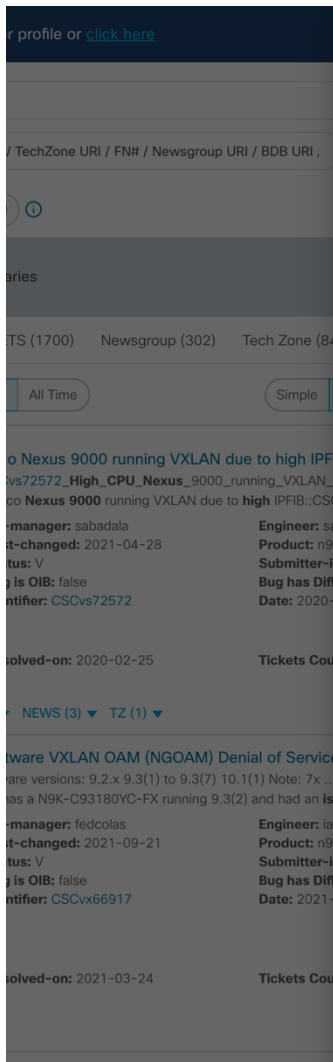

CSCvs72572 - High CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB

Bug-ID : CSCvs72572																								
Status : V	Severity : severe	Last-change :																						
Submitter-id : sonag	DE-manager : sabadala	Engineer : sabadala																						
Product and Components : n9k-standalone-sw : vxlan-nve																								
Found :	customer-use																							
Versions :	9.3(3)																							
Severity :	severe																							
Integrated-releases :	9.3(3.39),9.3(4),9.3(4)IIL9(0),9.3(4)IIL9(0.270),SMU_BUILD_5																							
Release Notes :	Symptom: High CPU on Cisco Nexus 9000 running VXLAN due to high IPFIB. NX-OS show process cpu may indicate IPFIB consistently between 10-20% of CPU utilization. # show processes cpu inc ig ipfib 804 1240 492 0 0.00% ipfib 2439 51140 3250 0 12.50% ipfib >>>> Linux bash top command will show ipfib consistently on 99-100% CPU utilization: bash-4.3# top top - 11:37:20 up 5 min, 2 users, load average: 2.32, 1.95, 0.94 <table><tr><th>PID</th><th>USER</th><th>PR</th><th>NI</th><th>VIRT</th><th>RES</th><th>SHR</th><th>S</th><th>%CPU</th><th>%MEM</th><th>TIME+</th></tr><tr><td>2439</td><td>root</td><td>-2</td><td>0</td><td>756204</td><td>170084</td><td>37868</td><td>R</td><td>99.7</td><td>0.7</td><td>1:39.53</td></tr></table> ipfib Delay on terminal printing outputs/dumping show techs. Show techs like show tech vxlan-evpn, show tech forwarding I3 unicast may not complete. Unable to shutdown NVE interface or make changes to the NVE config Conditions: Too many discontinuous VLANs with Ingress Replication. VXLAN with Ingress replication enabled for VLANs/VNIs. NX-OS release 9.3.x Workaround: Make the VLAN list/range contiguous as much as possible on Remote Peers and then reload the switch facing this high CPU issue. Further Problem Description: IPFIB receives the VLAN list with ingress replication en given VXLAN/NVE peer. This list is passed on as string		PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	%MEM	TIME+	2439	root	-2	0	756204	170084	37868	R	99.7	0.7	1:39.53
PID	USER	PR	NI	VIRT	RES	SHR	S	%CPU	%MEM	TIME+														
2439	root	-2	0	756204	170084	37868	R	99.7	0.7	1:39.53														

Feedback

Show Related Results

On click of "Show Related Results" link a new context-based search is triggered (in the below example, a contextual search based on the CDETS bug is triggered). The search opens a new page

CDETS CSCvu05760 - Nexus 9000/3000 : Bootflash goes read only

18:36:33 GMT 2021 2c2 < **N9K/N3K** bootflash goes read only with Micron_M500IT Drive --- > The bootflash of a **Nexus 3000** or **9000** series switches may be mounted ... chart2 Fri Apr 30 13:48:05 GMT 2021 66c66 < This issue is observed on **Nexus 3000** or **9000** series equipped with Micron M500 SSD drives. The <code>show hardware

Component: hw-tor
integrated-releases:...
Severity: moderate
Linked SRs: 55
Major version: 7.0

DE-manager: blulsege
Last-changed: 2021-07-12
Status: D
Bug is OIB: false
identifier: CSCvu05760

Engineer: jbatra
Product: n9k-hw
Submitter-id: clsulliv
Bug has Diffs: false
Date: 2020-04-29

Found: customer-use
Project: CSC.datacenter
Versions: 7.0(3)I7(7)
Bug is SS: false
Trouble Tickets:
688968121 689002033
689102226

▼ Show More

Attribute: j-plus-rel,iplus-b-tbp-...

Duplicate-of: CSCvx21260

Tickets Count Direct: 55

Customer Visible: Y

Show Related Results | Cached | Preview

Field Notice Public and Confidential URL redirect

External and internal field notice documents are now merged into one single data source, "Filed Notice". Internal/External documents can be filtered out by selecting the "Field notice Type" option from the left navigation section on the results page.

The "Cisco Confidential" hyperlinks to the internal version of FN documents, whereas the "Cisco Public" hyperlinks to external FN documents.

"Cisco Public" button will not be displayed, if the ExtURL metadata field is not present (OR) Null value

 Topic Search CISCO HIGHLY CONFIDENTIAL

1 Advanced Search Tips

☐ Show results based on: View query details

Search Mode: Simple Literal Advanced

Filters **Data Sources**

Data Sources

- ☐ All
- ☐ CSOne
- ☐ Newsgroup
- ☐ Cisco.com
- ☐ Acano
- ☒ Field Notice (1095)

Filters

Clear All Filters

Date Range

- ☐ This Year (1095)
- ☐ Last Month (32)
- ☐ Last Week (7)
- ☐ This Month (2)
- ☐ This Week (2)

From

To

Field Notice Type

- ☐ external (776)
- ☐ internal (319)

All Field Notice (1095)

1-20 of 1095 results from Past 3 Years All Time Simple Detailed Sort By: Relevance

Field Notice - PAK Licenses Will Not Be Supported on ASR 920 and NCS 520 Routers with Cisco IOS XE Release 17.7.x and Later Cisco Confidential Cisco Public

FN72270 PAK Licenses Will Not Be Supported on ASR 920 and NCS 520 Routers with Cisco IOS XE Release 17.7.x and Later Rakesh Kanchan Software Upgrade Recommended

Date: 2022-02-22 **Date Modified:** 2022-02-22 **Identifier:** FN72270 **ExtURL:** https://www.cisco.com/c/en/us/s... **Defect ID:** CSCvj52804 **Field Notice Type:** External

[Show Related Results](#)

Field Notice - IE3x00 Rugged Series, Embedded Series ESS3x00, and ESS9300 Switches: QuoVadis Root CA 2 Decommission Might Affect Smart Licensing and Smart Call Home Functionality Cisco Confidential Cisco Public

FN72298 IE3x00 Rugged Series, Embedded Series ESS3x00, and ESS9300 Switches: QuoVadis Root CA 2 Decommission Might Affect Smart Licensing and Smart Call Home Functionality

Date: 2022-02-24 **Date Modified:** 2022-02-24 **Subject:** Products->Cisco Products->Swit... **Identifier:** FN72298 **ExtURL:** https://www.cisco.com/c/en/us/s... **Defect ID:** CSCvx00521 **Field Notice Type:** External

[Show Related Results](#)

Field Notice - Some NCS540 routers may exhibit Cisco IOS XR upgrade failures due to slow SSD performance Cisco Confidential

FN72268 Some NCS540 routers may exhibit Cisco IOS XR upgrade failures due to slow SSD performance Rakesh Kanchan BIOS/Firmware Upgrade Recommended Internal

Date: 2022-02-22 **Date Modified:** 2022-02-22 **Identifier:** FN72268 **Defect ID:** CSCvj03814,CSCvz69186 **Field Notice Type:** Internal

[Show Related Results](#)

Field Notice - Cisco Unified Contact Center Enterprise (UCCE) and Express (UCX): QuoVadis Root CA 2 Decommission Might Affect Smart Licensing Cisco Confidential

FN72306 Cisco Unified Contact Center Enterprise (UCCE) and Express (UCX): QuoVadis Root CA 2 Decommission Might Affect Smart Licensing Nancy Ryan Software

Date: 2022-02-22 **Date Modified:** 2022-02-22 **Identifier:** FN72306 **Defect ID:** CSCvx00537,CSCvx00554,CS... **Field Notice Type:** External

[Show Related Results](#)

Metadata customization

Feature not implemented currently

Edit Data sources

When present in "All" tab, click on the gear icon in the left navigator to open the "EditData Sources" pop-up. Uncheck unneeded data sources or use 'edit data sources' dialog to change selected collections.

The screenshot shows the Topic Search interface. On the left, the 'Data Sources' sidebar is open, showing a list of data sources with checkboxes. The 'Edit data sources' button is highlighted. The main content area shows search results for 'nexus 9000'. The results include a detailed view of a specific issue (CDETS CSCvu05760) with fields like Component, DE-manager, Last-changed, Status, Bug is OIB, Identifier, Engineer, Product, Submitter-id, Bug has Diff's, Date, Found, Project, Versions, Bug is SS, Trouble Tickets, and Customer Visible.

Edit Data Sources

☐	Broadsoft Xchange
☒	CDETS
☐	CIAM
☒	CSOne
☒	CX Training
☐	Cisco DNA Spaces
☐	Cisco.com

Select All | Clear All

☐ Always search within these checked data sources

OK

Reset


Cancel

Use below option to reset metadata for all data sources to default settings

Reset


Note: If you do not see expected filters for a data source on the left navigation, please check if the "data sources" are selected. You can click on "Select All"

Clicking on standalone "Reset" button will reset metadata field for all data sources. i.e., any additional metadata fields will appear.


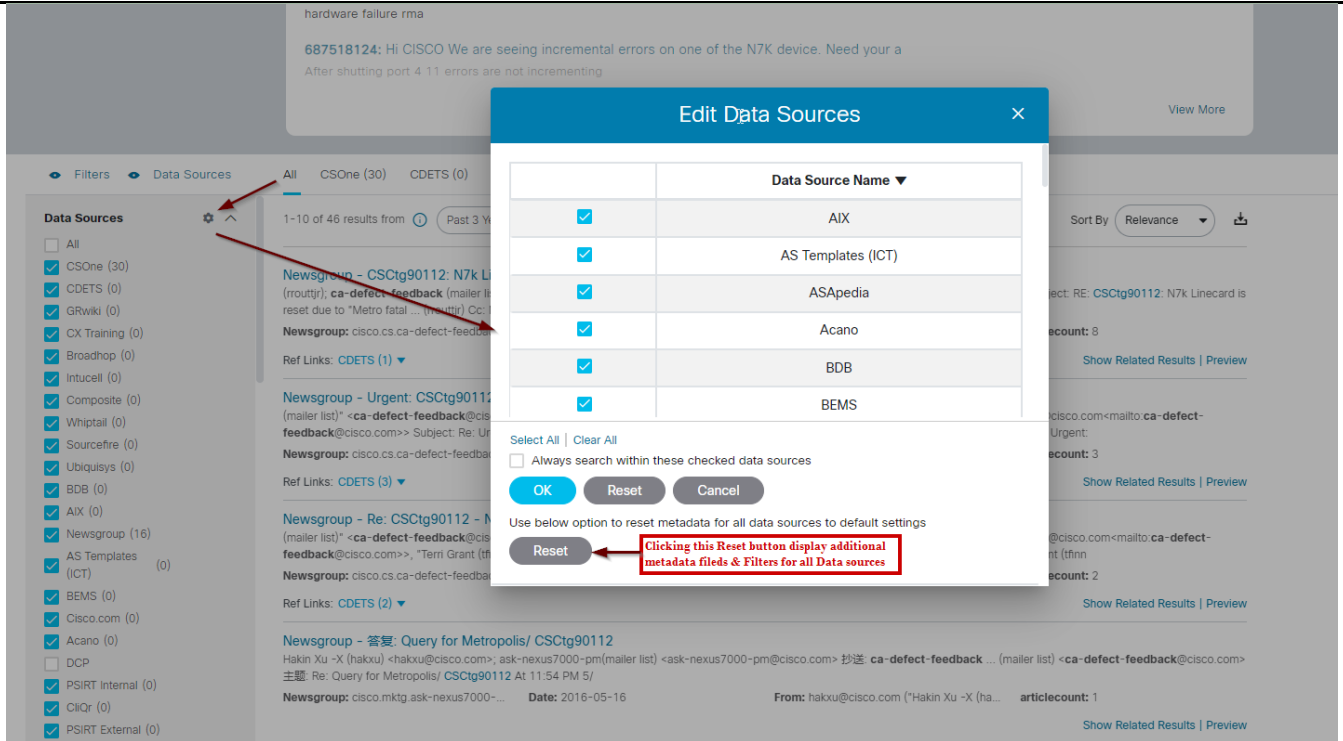


CSOne, AppD Zendesk, Umbrella Zendesk & Newsgroup Data Protection

As per data protection compliance, CSOne data source is restricted in Topic Search application. Only users having access to CSOne application will be allowed to access/search C3/CSOne/CARE, AppD Zendesk, Umbrella Zendesk data in Topic Search.

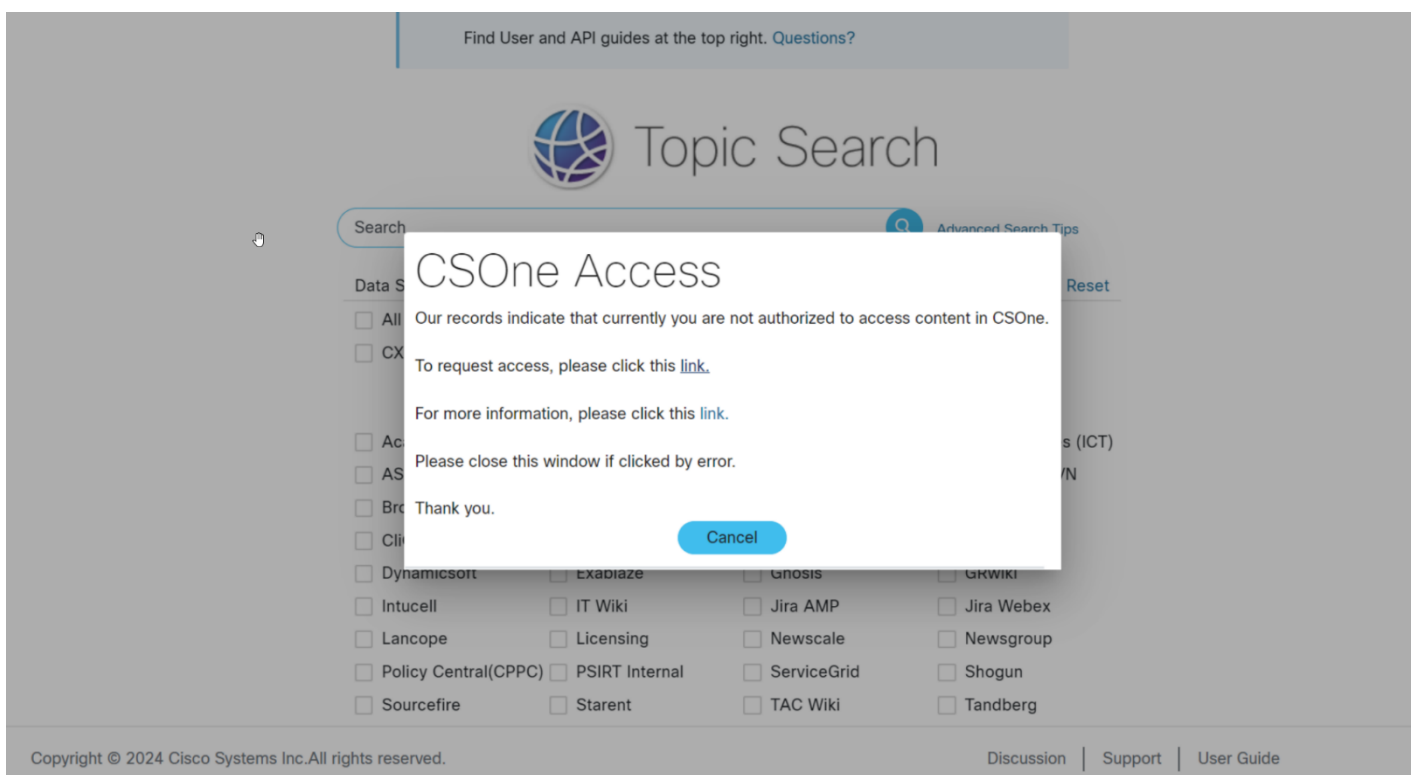


CSOne Role Based Access Controls (RBAC) / policy based access controls (PBAC) information:
<https://cisco.sharepoint.com/sites/RBACInfo/SitePages/About-RBAC.aspx>

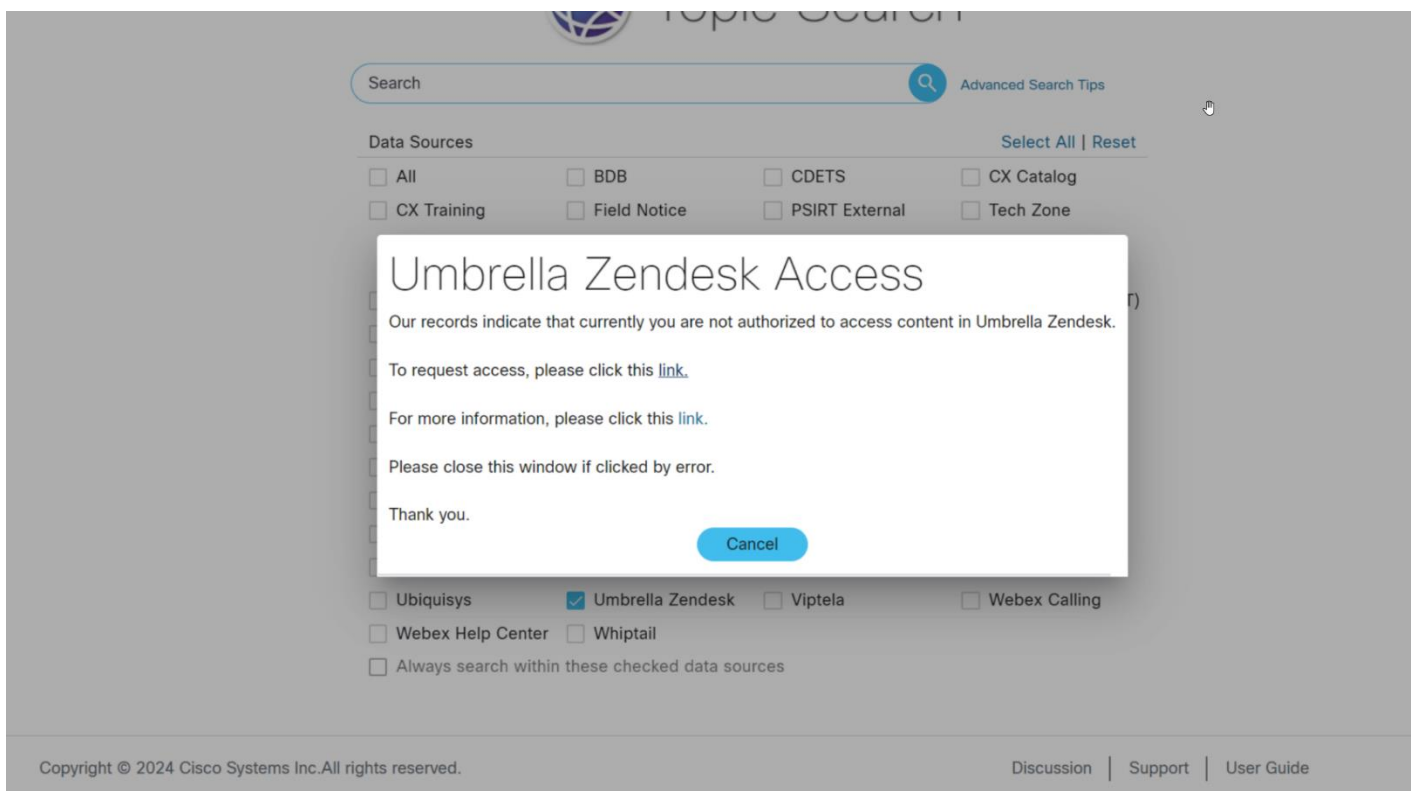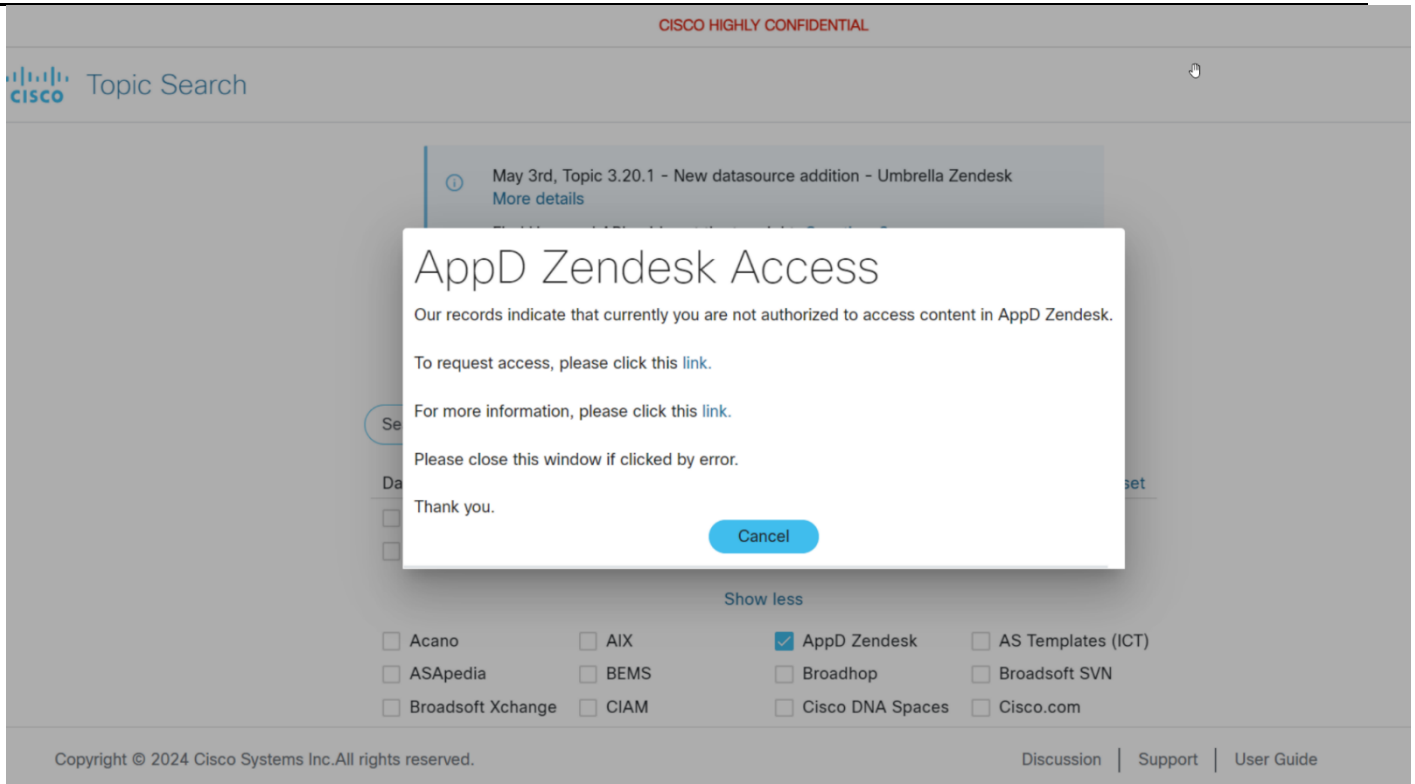

As part of Newsgroup data protection, access restriction for the Newsgroup datasource is enabled in Topic.

Please follow [the link](#) for steps to get access through Access Request Tool (ART).

Users without newsgroup access will be restricted to access the newsgroup data. Click on "Newsgroup" data source the below pop up will open. A similar pop-up would open when a user does not have CSOne access and tries to check the data source on the homepage.

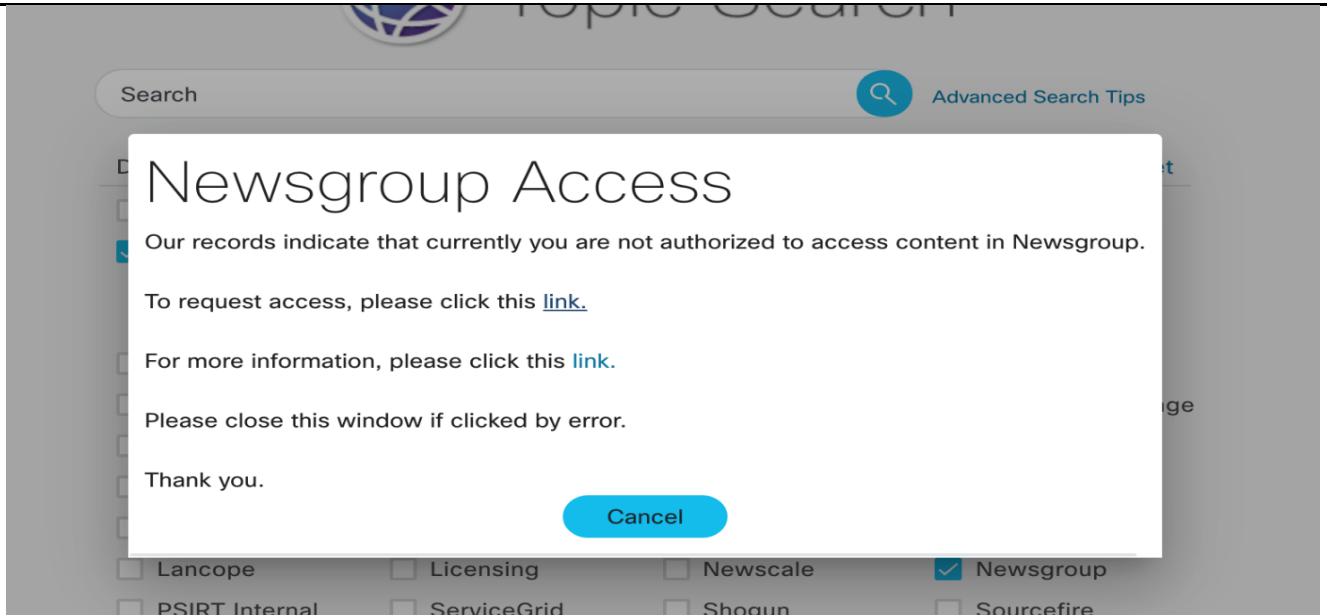

Note: The access check service runs every 3 hrs., and CSOne / Newsgroup results can be accessed by users for up to 3 hrs. after access expiration.

User ID Boost (UIB)

This feature provides users with a means to boost relevant documents based on a given User CEC ID.

If a CEC User ID is detected in the given query, then the "Add User ID boost" button option will be displayed. When clicked, it will boost the User ID and change the button background color to blue. On boosting, a new relevancy model ID will get applied, and documents that match the User ID will be ranked higher.

Note: UIB selection will remain sticky in the following scenarios.

- On data source tab switch, Check/Uncheck data sources, Pagination and results per page, Check/Uncheck filter options.

The screenshot displays the Cisco Topic Search interface. A red arrow points to the 'Add User ID boost' button, which is highlighted in blue. A callout box states: 'Upon clicking "Add User ID boost" the userid will be boosted. The bgcolor will be changed to Blue bgcolor.' The interface shows search results for 'rma cran' with filters for Data Sources (All, AIX (1), DCP (54)) and Date Range (Before Last Year (54), This Year (1), Last Month (1)). The search results list documents such as 'DCP - Lessons Learnt From Last Upgrade - 6.5.26' and 'DCP - Comcast_CRS_6.1.4_SMU_Upgrade_MOP v1.0'.

Reference Links

Reference links are the links referred to by users inside the documents.

Reference links include bidirectional information, meaning both "From" and "To" the document. An incoming arrow on the right side of the reference link shows that the link is referenced in an external document. Only the top 5 links based on the popularity (High Page-Ranked documents) are displayed in the section.

Data sources that have reference links enabled:

C3, CDETS, Tech-Zone, Newsgroup, PSIRT and Field-Notice, BEMS, and CVE

documents

Frequency of reference data refresh: Sunday, Tuesday & Thursday.

In reference links for CDETS, CSONE, TechZone and Newsgroup results section, the hard links are displayed first and then the soft links. The hard links are the bugs that are linked to the case and vice versa. Soft links are mentions of a case/bug in another document.

Example in the context below: TechZone article is referenced inside CSCuv74517 bug.Bug CSCuf20035 is mentioned in the TechZone article.

For a SR, if a bug is mapped as a linked defect by an Engineer, then the corresponding Reference

Tech Zone - Nexus 7000 FEX MTU QoS Configuration 6.2(2)

https://techzone.cisco.com/t5/Layer-2-Features-Services/Nexus-7000-FEX-MTU-QoS-Configuration-6-2-2/ta-p/516123

... on the **Nexus 7000**, the **MTU** for **FEX** interfaces must be set in conjunction with the network- qos policy on ... Basic **Nexus 7000** CLI Knowledge Basic **Nexus 7000** VDC Knowledge Basic **Nexus 7000** QoS Knowledge Components ... wp1084349 Re: **Nexus 7000 FEX MTU** QoS Configuration 6.2(2) xiaobinh Hi

Regarding the comment from your document, ...

Article type	None	Author	apeacock	Board	Layer 2 Features/Ser...	Count of Linked SRs	6
Labels	Configure,QoS,Nexus...	State	None	Style	tkb	Views	6491
Kudos	18	Replies	1				
Linked SR	None						
Date	2018-07-24						

Ref Links : C3 (5) CDETS (2) Tech Zone (2)

CSCuf20035 : FEX MTU changes not taking effect on fex queues

CSCuv74517 : jumbo frame packet drops on FEX EVPN leaf

Tech Zone - Nexus 7000 FEX MTU QoS Configuration 6.2(2) xiaobinh Hi

https://techzone.cisco.com/t5/Layer-2-Features-Services/Nexus-7000-FEX-MTU-QoS-Configuration-6-2-2/ta-p/516123

... on the **Nexus 7000**, the **MTU** for **FEX** interfaces must be set in conjunction with the network- qos policy on ... Basic **Nexus 7000** CLI Knowledge Basic **Nexus 7000** VDC Knowledge Basic **Nexus 7000** QoS Knowledge Components ... wp1084349 Re: **Nexus 7000 FEX MTU** QoS Configuration 6.2(2) xiaobinh Hi

Regarding the comment from your document, ...

link displays with a **bug** icon in Topic search results page.

[illegible]

Internal/External PSIRT and field notice documents within the reference links section in each result set are differentiated by "I" and "E" icon indication. An incoming arrow on the right side of the reference link shows that the link is referenced in an external document.

Example in the context below: CDETS bug is referenced with field notice document.

CDETS CSCun60400- VccP Memory Component Issue: N7K

<http://www.win-metrics.cisco.com/cgi-bin/dtdsdisp.cgi?id=CSCun60400>

... Info-awaiting: Info-req-on: Assigner-id: jmenon Code-reviewer: Assigned-on: 08-DEC-14 OS-type: End: CSCun60400

Component hw-n7k	DE-manager jmenon	Engineer jmenon	Found customer-use
Integrated-releases None	Keywords None	Last-changed 2018-11-16	Project CSC.hw
Severity 2	Status R	Submitter-id nigupta	Versions all
Trouble Tickets 629152171 ...	Duplicate-of None	Resolved-on 2014-12-08	
Product n7k			
Linked SRs 45			
Tickets Count Direct None			

Ref Links : C3 (5) ▾ CDETS (1) ▾ Tech Zone (1) ▾ FN (1) ▾ BDB (2) ▾ GNOSIS (1) ▾

Nexus 7000 Products Affected Might Fail to Boot Up After a Softw...  

CDETS CSCvs12565- Multihop Upgrade: injecti...

Example in the below sample: CVE is referenced inside CSCvr56406 bug. Bug CSCvr56406 is mentioned in CVE.

CDETS CSCvr56406- Network Time Protocol Daemon Security Update for June 2, 2016

<http://www.win-metrics.cisco.com/cgi-bin/dtdsdisp.cgi?id=CSCvr56406>

... Info-awaiting: Info-req-on: Assigner-id: Code-reviewer: Assigned-on: OS-type: End: CSCvr56406

Component security	DE-manager ganguly	Engineer None	Found None
Integrated-releases None	Keywords None	Last-changed 2020-03-4	Project CSC.embu
Severity 2	Status J	Submitter-id dmccowan	Versions None
Trouble Tickets None	Duplicate-of None	Resolved-on None	
Product openstack			
Linked SRs 0			
Tickets Count Direct None			

Ref Links : CVE (5) ▾

- CVE-2016-4954
- CVE-2016-4953
- CVE-2016-4956
- CVE-2016-4957
- CVE-2016-4955

Context Based Filter

The intent of the Context based Filter (CBF) feature is to provide users with a seamless approach to filter relevant documents based on the Context on which the user is working on. It automates the process of logically filtering data across the data sources listed below.

Data Source	What to use as Context-ID
CSOne	SR number
CDETS	Bug-ID
TechZone	document's URL
Newsgroup	document's URL
FieldNotice	FN Identifier
PSIRT	
External & Internal	document's URL

GNOSIS	document's URL
BEMS	document's URL
BDB	document's URL

Given the context-id Topic search can auto-filter records across multiple datasources using Context based filter.

For example, given a SR number as context, Topic Search will apply filter on related products (CDETS), Boards (TechZone), Groups (Newsgroups), Field notices, GNOSIS, BEMS, BDB and Webex Help Center mappings. During contextual search, the same filters are applied when using CDETS Defects or TechZone URLs or Newsgroups or FN Identifiers or PSIRT External/Internal URLs or GNOSIS or BEMS or BDB URLs.

Users can also straight away perform a context-based filter search by appending the param "**contextId**" into Topic URL.

When crafting the URL, append the ID into the URL like shown below and load the page

- For home page
<https://topic.cisco.com/?contextId=<<contextID>>>

- For results page
<https://topic.cisco.com/results?queryText=nexus%209000&repos=c3&repos=cdets&repos=techzone&repos=tstraining&repos=bdb&repos=psirt&repos=fieldnotice&basicSearch=false&userIdBoost=false&hotWarm=false&checkedds=c3&checkedds=cdets&checkedds=techzone&checkedds=tstraining&checkedds=bdb&checkedds=psirt&checkedds=fieldnotice&&contextId=<<contextID>>>

Also, with Context based filter feature we are enabling Semantic boosts for all searches. Meaning "High cpu" is also searched when system recognizes "High Spike" in the query text. This additional boost feature is extended, only for SR based searches, to include the title and description of the document that is used for Context-based filter. The phrases from the title and description are used to boost the filtered documents; thus, semantically similar documents will get ranked higher on the page.

By giving the Context-ID in the text box and clicking on the apply button, the user can filter the documents.

Please refer to the screen capture below for SR/Case as context-id:

The first screenshot shows a search for 'nexus 9000'. The 'Query Details' sidebar lists applied filters: CSOne SubTechs(BEMS/BDB), various Nexus 9000 series switch issues, CDET Products, TechZone Boards, and Newsgroup groups. The main results area shows a document titled 'Configuring MPLS Layer 3 VPNs Intro'.

The second screenshot shows a search for 'https://techzone.cisco.com/t5/Nexus-9300/Nexus-9000-Mac'. The 'Query Details' sidebar lists applied filters: CSOne SubTechs, CDET Products, Newsgroup groups, Phrases Boosted, and Synonyms. The main results area shows a document titled '588034110: Nexus 9000: Licensing'.

Semantic Search (ON / OFF)

With this feature, Topic is introducing phrases and semantic recognition from the user's query. It means the entity and context of every query are recognized and are used to search as a phrase. Also, the semantic meaning of every phrase is included as a boost. Thus, it helps to boost the ranking of similar & relevant documents to the top of the page.

In the Search Results page, users have the option to override the Semantic search settings set under

My Preferences for that browser session.

CISCO HIGHLY CONFIDENTIAL

Topic Search

vedge

Show results based on: CScvp99988

Search Mode: Simple Literal Advanced Semantic search: **On** Off View query details

Filters Data Sources

All AIX (0) AS Templates (ICT) (0) ASApedia (0) Acano (0) AppD Zendesk (0) More

1-20 of 96466 results from Past 3 Years All Time

PSIRT External - Cisco SD-WAN vEdge Routers Denial of Service Vulnerability

cisco-sa-sdwan-vedge-dos-jerVm4B Cisco SD-WAN vEdge Routers Denial of Service Vulnerability Medium Cisco SD-WAN vEdge router CScvp99988 A vulnerability in the NETCONF process ... This advisory is available at the following link: https://sec.cloudapps.cisco.com/security/center/content/CiscoSecurityAdvisory/cisco-sa-sdwan-vedge-dos-jerVm4B ... of Cisco SD-WAN vEdge Routers could allow an authenticated, local attacker to cause an denial of service condition.

Last Updated Date: 2022-04-13 Advisory ID: cisco-sa-sdwan-vedge-dos-... First Published: 2022-04-13 Severity: Medium Ref Links: CDETS (1)

Query Details

Applied filter on:

CSONe SubTechs(BEMS/BDB)-
'IC Creation - SDWAN (DO NOT USE FOR SR ROUTING)',
'vEdge (100, 1000, 2000, 5000, Cloud)',
'IOS-XE SD-WAN (cEdge) routers in controller mode',
'vManage - Templates, Deep Packet Inspection (DPI)',
'vEdge routers (ViptelaOS)'
CDETS Products(PSIRT/GNOSIS/FN)- 'vedge'
TechZone Boards- 'Viptela', 'Viptela KB'
Newsgroup groups- 'cisco.cs.rep-jp-sdwan',
'cisco.eng.ngena-nfv-test', 'cisco.cs.ca-defect-feedback',
'cisco.cs.ask-cisco-sdwan'

Topic Search

vedge

Show results based on: CScvp99988

Search Mode: Simple Literal Advanced Semantic search: **On** Off

Filters Data Sources

All AIX (18) AS Templates (ICT) (0) ASApedia (0) Acano (0) AppD Zendesk (0) More

1-20 of 226112 results from Past 3 Years All Time

PSIRT External - Cisco SD-WAN vEdge Routers Denial of Service Vulnerability

cisco-sa-sdwan-vedge-dos-jerVm4B Cisco SD-WAN vEdge Routers Denial of Service Vulnerability Medium Cisco SD-WAN vEdge router CScvp55609 NA CVE-2022-20717 5.5 CWE-789 A vulnerability in the NETCONF process ... This advisory is available at the following link: https://sec.cloudapps.cisco.com/security/center/content/CiscoSecurityAdvisory/cisco-sa-sdwan-vedge-dos-jerVm4B ... of Cisco SD-WAN vEdge Routers could allow an authenticated, local attacker to cause an affected device to run out of memory, resulting in a denial of service (DoS) condition.

Last Updated Date: 2022-04-13 Advisory ID: cisco-sa-sdwan-vedge-dos-... First Published: 2022-04-13 Product Names: Cisco SD-WAN vEdge ro...

Ref Links: CDETS (1)

SR 696626781 - Hub vedge unable to ping branch site vedge, branch site vedge can ping hub vedge

unable to ping branch site vedge, branch site vedge can ping hub vedge Hi Munwhy, I am Dexi chand from Cisco. ... unable to ping branch site vedge, branch site vedge can ping hub vedge Hi Naga, I think you got the issues wrong. ... Case details: Case: 696626781 Case Subject: Hub vedge unable to ping branch site vedge, branch site vedge can ping hub vedge

Severity: 3 Status: Open Please REPLY ALL to this email so that

SR State: Closed
Priority: 3
Technology: SDWAN - Cisco-Hosted
Serial Number: 110G435170330
Additional Email:

Company Name: PERKIN ELMER
Problem Code: Error Messages, Logs, De...
Identifier: 696626781
SR contact name: Mun Whye Leong

Contract Status: ACTIVE
Sub Technology: vEdge routers (ViptelaOS)
Date: 2022-12-15
Defect Count: 0

Owner: nveeraga
Software type: THRD_PARTY_PRODUCT...
Contract ID: 94134755
Hardware Product: VIPTELA VIPTELA HW ...

Feedback

EOL Link

The link to EOL document will be prominently displayed whenever the user search cites an End-of-life Product identifier (EOL PID). EOL pids data is retrieved from the EOX API once a day.

The EOL notice will be displayed for eol pids and its spare parts.

e.g., L-FL-AA-CA-VSM=
L-FL-AA-CA-VSM

The screenshot shows the Cisco Topic Search interface. The search bar contains 'L-FL-AA-CA-VSM='. The search mode is set to 'Simple'. The results show 1-1 of 1 results from 'Past 3 Years'. The search includes an end-of-life PID/Product L-FL-AA-CA-VSM - EOL Notice. The results list includes SR 691873164 - BNG issue on template profile. The search results are displayed in a table with columns for SR Number, SR State, Priority, Software type, Date, SR contact name, Company Name, Problem Code, Software Version, Contract ID, Contract Status, Resolution Code, Technology, Status, Hardware Product, Owner, Sub Technology, Identifier, Serial Number, and Additional Email. A red arrow points to the 'EOL Notice' link in the search results. Below the search results, there is a 'Product part numbers' section with a table showing affected product part numbers.

End-of-Sale Product Part Number	Product Description
L-FL-AA-AG-VSM=	Aggression Detection Application for Cisco IP Camera for VSM
L-FL-AA-AG=	Aggression Detection Application for Cisco IP Cameras
L-FL-AA-CA-VSM=	Car Alarm Detection Application for Cisco IP Cameras for VSM
L-FL-AA-CA=	Car Alarm Detection Application for Cisco IP Cameras

The screenshot shows the Cisco Topic Search interface. The search bar contains 'L-FL-AA-CA-VSM'. The search mode is set to 'Simple'. The results show 1-20 of 29 results from 'Past 3 Years'. The search includes an end-of-life PID/Product L-FL-AA-CA-VSM - EOL Notice. The results list includes SR 691873164 - BNG issue on template profile. The search results are displayed in a table with columns for SR Number, SR State, Priority, Software type, Date, SR contact name, Company Name, Problem Code, Software Version, Contract ID, Contract Status, Resolution Code, Technology, Status, Hardware Product, Owner, Sub Technology, Identifier, Serial Number, and Additional Email. A red arrow points to the 'EOL Notice' link in the search results. Below the search results, there is a 'Product part numbers' section with a table showing affected product part numbers.

End-of-Sale Product Part Number	Product Description
L-FL-AA-AG-VSM=	Aggression Detection Application for Cisco IP Camera for VSM
L-FL-AA-AG=	Aggression Detection Application for Cisco IP Cameras
L-FL-AA-CA-VSM=	Car Alarm Detection Application for Cisco IP Cameras for VSM
L-FL-AA-CA=	Car Alarm Detection Application for Cisco IP Cameras
L-FL-AA-GB-VSM=	Glass Break Detection App for Cisco IP Cameras for VSM
L-FL-AA-GB=	Glass Break Detection Application for Cisco IP Cameras

Display only one EoL link even if the query contains multiple EoL PIDs and can of any order.
e.g., PWR-CORD-UK-C= WS-C2960+24PC-L++

Cisco Topic Search

Search Query: PWR-CORD-UK-C= WS-C2960+24PC-L++

Show results based on: SR / BugId / TechZone URI / FNA / Newsgroup URI / BDB URI | View query details

Search Mode: Simple | Literal | Advanced

Filters: Retain Filters | Clear All Filters | Search All Filters

Date Range: Before Last Year (76)

ServiceGrid - Case-Type: Error outside of ServiceGrid (76)

ServiceGrid - Contact: MS ONDUTY/servicegrid-managed-services@cisco.com (21) | Michael Cooner/mjcooan@us.ibm.com (6) | Jiang Jialing/jiangl@esidco.com (5) | Ratna Patil/ratna.patil@ms-onduty.com (3)

Results: 1-20 of 76 results from Past 3 Years | All Time | Sort By Relevance

Showing simple search results using OR operator. PWR-CORD-UK-C= WS-C2960+24PC-L++
No matches found using AND operator. Consider using AllTime. PWR-CORD-UK-C= WS-C2960+24PC-L++
Perform a literal search instead?
Search includes an end-of-life PID/Product WS-C2960+24PC-L++ - EOL Notice

ServiceGrid - 401039510
Thank you, >> >> >> IT Engineer Government Trust and ... Thank you, IT Engineer Government Trust and Technology Services Cisco ... Thank you, IT Engineer Government Trust and Technology Services Cisco
Ticket Open Date: 2017-03-31
Country: AUSTRIA
Contact: Derek Drake/dedrake@cisco.com
Ticket Close Date: 2017-05-24
Categories: Incident,Bridge,Workflow Port
Customer Name: Cisco Systems, Inc.
Priority: P2-Error
Service: SolveDirect
Case-Type: Error outside of ServiceGrid

ServiceGrid - 401026231
+43 1 5320949 1733 General Shared Services S.c.a.r.l... Österreich Kratochvíještraža 4 1220 Wien / Österreich general at generalbank at Generali Shared Services S.c.a.r.l... | unqi
+c i wc +1 13 Sincerely, Flamar...
Ticket Open Date: 2017-03-08
Country: AUSTRIA
Contact: Flamar Gogopill/gogopill@cisco.com
Ticket Close Date: 2017-03-24
Categories: Service Request,Other Servic...
Customer Name: Cisco Systems, Inc.
Priority: P3-Question
Service: SolveDirect
Case-Type: Error outside of ServiceGrid

ServiceGrid - 401057282
ve Direct com --- An error occurred - ve Direct com --- An error occurred
Ticket Open Date: 2017-05-09
Country: AUSTRIA
Contact: Emira Wagner/Emira.Wagner@m...
Ticket Close Date: 2017-06-06
Categories: Incident,Online
Customer Name: ms-CNS Communicatio...
Priority: P2-Error
Service: T-Mobile
Case-Type: Error outside of ServiceGrid

ServiceGrid - 401036184
On 27/03/2017, 06:38, "Clifton L Doss@wellsfargo.com" wrote: We're investigating... thanks C... On 27/03/2017, 06:38, "Clifton L Doss@wellsfargo.com" wrote: We're investigating... thanks C...
Ticket Open Date: 2017-03-27
Country: AUSTRIA
Contact: MS ONDUTY/servicegrid-manag...
Ticket Close Date: 2017-04-10
Categories: Incident,Bridge,Workflow Port
Customer Name: Cisco Systems, Inc.
Priority: P1-System Failure
Service: Wells Fargo
Case-Type: Error outside of ServiceGrid

ServiceGrid - 401059893

In the case of an exact phrase search for the EoL PID (i.e., enclosed PID with double quotes), will display the EoL Link. (e.g., **ac power cord rma "PWR-CORD-UK-C"**)

Cisco Topic Search

ac power cord rma "PWR-CORD-UK-C"

Show results based on: SR / BugId / TechZone URI / FNN / Newsgroup URI / BDB URI | View query details

Search Mode: Simple Literal Advanced

Filters Data Sources

1-20 of 6312 results from Past 3 Years All Time | Sort By Relevance

Showing advanced search results using OR operator. ac power cord rma "PWR-CORD-UK-C"
No matches found using AND operator. Consider using All Time. ac power cord rma "PWR-CORD-UK-C"
Perform a literal search instead?

Search includes an end-of-life PID/Product PWR-CORD-UK-C - EOL Notice

CDETS CSCvz07678 - Cat9300 Stack port remains down after standby power cord OR
cord of standby switch ... cable of standby device SW2. After standby device come back, stack port 2 of SW1 was down and showing ... cord of standby switch.

CDETS CSCvp56289 - 9300 switch silent reload with platinum power supply (PWR-C1-350WAC-P)
If issue matches raise mfg-new RMA for any failing power supplies ... If issue matches raise mfg-new RMA for any failing power supplies ... If issue matches raise mfg-new RMA for any failing power supplies.

CDETS CSCvq97626 - Support for Blade RMA
Supply Current' + RACK_PS_POWER + Power Supply Power' + RACK_PS_INPUT = Power Supply ... Supply Current' + RACK_PS_POWER = Power Supply Power' + RACK_PS_POWER = Power Supply ... Supply Current' + RACK_PS_POWER = Power Supply Power' + RACK_PS_POWER = Power Supply Power'

CDETS CSCvi62014 - PWR-6KW-AAC-V3 detecting false alarm
a/src/asrk9_pem_util_common.c b/src/asrk9_pem_util_common.c index 3d91a90..8e126b0 100644 --- b/src/a/src/asrk9_pem_util_common.c b/src/asrk9_pem_util_common.c index 3d91a90..8e126b0 100644 --- b/src/a/src/asrk9_pem_util_common.c b/src/asrk9_pem_util_common.c index 37103b..f74d904 100644 --- a/src/a/src/

CDETS CSCwa54463 - PWR-TST: QuakeTJ VoreTJ48P DVT-1 (P1A): 2.5V Power Up Sequence Failure
METASTART klineep hw-quaket glocvalc 3 lchanam dvt quaketQ CSC hw moderate R elaphm PWR-TST: QuakeTJ ... VoreTJ48P DVT-1 (P1A): 2.5V Power Up Sequence Failure The 2.5V is not in order of the power up sequence ... The 2.5V should power up after 3.3V. The 2.5V power up 104us before 3.3V.

CDETS CSCwa54462 - PWR-TST: QuakeTJ VoreTJ48T DVT-1 (P1B): 2.5V Power Up Sequence Failure
METASTART klineep hw-quaket glocvalc 3 lchanam dvt quaketQ CSC hw moderate R elaphm PWR-TST: QuakeTJ ... VoreTJ48T DVT-1 (P1B): 2.5V Power Up Sequence Failure The 2.5V is not in order of the power up sequence ... The 2.5V should power up after 3.3V. The 2.5V power up 163us before 3.3V.

Integrated-releases

- 15/2(04/00)ST (118)
- 15/6(01)SN (112)
- 8/1(1) (111)
- 15/2(04/00)644 (109)
- E
- 15/2(06/03)000 (108)
- E
- 15/2(05/00)ST (102)
- 17/9/0/2 (86)
- 15/3(03)JK05 (81)
- 17/9/0/3 (80)
- 7/9/0/1/1/1/78

EoL Notice has been updated, and functionality remains the same. (e.g., **L-NS-200-500S-TS=**)

Note:
1- Partial PIDs search will not display EoL link at this moment
2- EOL notices are considered for PIDS modified after 2012.

Data Retention

Data Retention and Purge Scope:

Cisco Data Protection Standard mandates compliance with the Data Retention and Destruction process as described in the Standard.

Management action required that we define and implement Services data retention and disposal requirements for key data repositories, including exceptions with ERIM (Enterprise Records Information Management).

Why Data Retention?

- To comply with Cisco's Data Privacy and Enterprise Records & Information Management (ERIM) policies
- Meeting Cisco's Governance, Risk and Controls (GRC) audit remediation requirements
- To build Customer trust in Cisco's ability to protect their data
- To reduce the number of potential data incidents and/or breaches
- To protect the Cisco brand
- Good data hygiene

See [TAC Case Data Retention](#) for more information

What data will be purged in Topic Search?

- Agreed Data Retention schedule
- Scope: All TAC case data/case attachments:
 - In Closed Status.
 - Older than 10 years.

All CSOne (formerly known as C3) closed cases older than 10 years will be purged. The content will not be searchable or accessible.

Newsgroup Data Purge:

Newsgroup data purge deletes the discussions older than 10 years based on the creation date of the discussion. The purged content will not be searchable or accessible.

The purge process is executed every weekend to delete discussions which are older than 10 years.

AppD Zendesk Data Purge:

AppD Zendesk data purge deletes the cases older than 10 years based on the updated date of the cases.

The purge process is executed every weekend to delete cases which are older than 10 years.

Note: Currently the Notification for purged contents showing only for CSOne & AppD Zendesk in the application, only for the query containing the case id's.

For any questions or concerns

Email topic-team@cisco.com

Search Help

'Search Mode' buttons are displayed below Topic search box. Upon performing a search, the Topic application automatically assigns a search mode (simple or advanced) based on query formation. Once the results are displayed, the user can perform a 'literal' search using the Search mode button or a 'literal search' option above organic result. Please refer to the screenshot below.


There are two groups of content base that you can search on –

- **Past 3 years** - content comprises of documents created or updated recently in the las 3 years. And despite the name, it also includes documents that Topic users have clicked on in the last 1 year.
- **AllTime** - content has all documents

Note that a search on 'Past 3 years' responds faster than a search on 'All Time' content.

By default, a search is performed against the 'Past 3 years' content. Users can decide to search for 'All Time' content by using the button above the organic results once the results for the initial search are displayed. There is no automatic fallback implemented currently to search on 'All Time', if result(s) are not found in 'Past 3 years'.

An exception to the above scenario is when a C3, CDETS or Newsgroup document ID is present in the query string. In that case, 'search' is *automatically* done on 'All Time' content to ensure that the user finds the document.

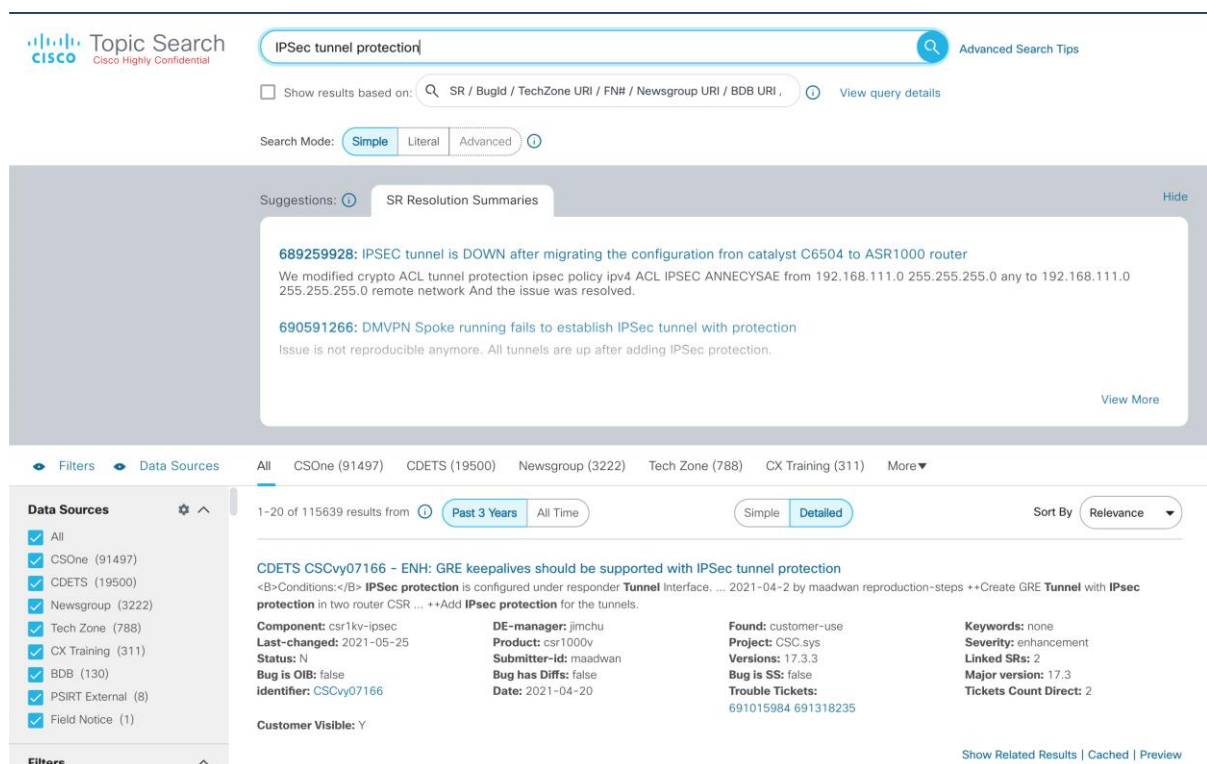

The screenshot displays the Cisco Topic Search interface. At the top, the search bar contains the query "IPSec tunnel protection". Below the search bar, there are options to show results based on "SR / BugId / TechZone URI / FN# / Newsgroup URI / BOB URI" and a "View query details" link. The search mode is set to "Simple".

Below the search bar, there are suggestions for "SR Resolution Summaries". Two suggestions are visible:

- 689259928:** IPSEC tunnel is DOWN after migrating the configuration from catalyst C6504 to ASR1000 router. We modified crypto ACL tunnel protection ipsec policy ipv4 ACL IPSEC ANNECYSAE from 192.168.111.0 255.255.255.0 any to 192.168.111.0 255.255.255.0 remote network. And the issue was resolved.
- 690591266:** DMVPN Spoke running fails to establish IPsec tunnel with protection. Issue is not reproducible anymore. All tunnels are up after adding IPsec protection.

Below the suggestions, there are filters for "Data Sources" and "Filters". The "Data Sources" filter shows a list of sources with checkboxes: All, CSOne (91497), CDETS (19500), Newsgroup (3222), Tech Zone (788), CX Training (311), BDB (130), PSIRT External (8), and Field Notice (1). The "Filters" section shows "1-20 of 115639 results from" and buttons for "Past 3 Years" and "All Time". The search results are sorted by "Relevance".

The first search result is titled "CDETS CSCvy07166 - ENH: GRE keepalives should be supported with IPSec tunnel protection". The description states: "Conditions: IPsec protection is configured under responder Tunnel Interface. ... 2021-04-2 by maadwan reproduction-steps ++Create GRE Tunnel with IPsec protection in two router CSR ... ++Add IPsec protection for the tunnels."

The result details are as follows:

Component: csr1ky-ipsec	DE-manager: jimchu	Found: customer-use	Keywords: none
Last-changed: 2021-05-25	Product: csr1000v	Project: CSC.sys	Severity: enhancement
Status: N	Submitter-id: maadwan	Versions: 17.3.3	Linked SRs: 2
Bug is OIB: false	Bug has Diff: false	Bug is SS: false	Major version: 17.3
Identifier: CSCvy07166	Date: 2021-04-20	Trouble Tickets: 691015984 691318235	Tickets Count Direct: 2

At the bottom right, there are links for "Show Related Results", "Cached", and "Preview".

Simple Search

Search matches both the exact terms and stemmed versions of the search terms to provide better results. However, stemming has a limitation of technical jargon. Stemming is similar to lemmatization and different. For documents indexing we have used the elastic snowball English stemmer and more info about how stemming works can be found at <https://www.elastic.co/docs/manage-data/data-store/text-analysis/stemming>.

Search terms are not case-sensitive. Simple Search is when a search query does not contain any search operator with keywords or symbols. Note that the Topic Search auto- detects if there is any search operator present in the search query and if present, treats it as an 'Advanced Search'. All the search operators that are detected are mentioned in the Advanced Search section below.

If you did not notice any terms in the search box, you can choose the 'literal' search mode presented below the search box or the literal search option presented above the organic results, to get the best results.

Search Logic:

1. When a search is performed, Topic Search first looks for documents that have all terms in the query (**AND operator**).
2. If the above scenario results in zero results, Topic Search resubmits the query with an **OR operator** so that documents with majority of the search terms present, can be displayed as results. In this case, a message is displayed above the organic results indicating an OR search.

In case there are open quotes (that is part of the content) in your query, a helpful hint will be shown in the result suggesting that escaping the quotes with a backslash could provide better results.

Search query contains open quotes which may limit your results. For better results, add an additional quote or escape (\") an existing quote.

failed  aaron click-ap

Note: Numeric queries in Topic search, resulting in intermittent timeouts for specific queries, is a known issue. After thorough investigation, it has been determined that this issue currently does not have an immediate fix due to large effort and additional infra resources needed for it. (e.g. 0.0.0.0/0)

Advanced Search

Phrase search

Terms surrounded by double quotes (treated as phrase). A phrase search query string is surrounded by double quotes, which searches for all the words in the phrase, in the same order

Syntax is "< Phrase to search for >"

For example, "**nexus 9000**" searches for 'nexus' and '9000' in that same order close to each other, but it will also match **nexus_9000**; **_nexus#9000_** etc., by considering the special character as a space.

Multiple phrases can be included in a single search query

e.g., **"nexus 9000" "highcpu"**

*Note: If the phrase query contains quotes that are part of the content, these need to be **escaped** with a backslash.*

E.g., to search for

print \$1":"\$2

the query will need to be entered as

print \$1\\":"\\\$2

Note: Please use regular double quote characters for phrase search as far as possible.

Application converts 'MS office version of double quotes' to regular one's while searching.

Ranges

Numeric metadata fields support more, less, and range operators. Currently, ranges can be specified for numeric fields. Inclusive ranges are specified with square brackets **[min TO max]** and exclusive ranges with curlybrackets **{min TO max}**

E.g.,

priority:<2

Range with one side unbounded

priority:<=2

Range with one side unbounded

priority:[1 TO 3]

both 1 and 3 included

priority:[1 TO 5}

1 included, 5 excluded

Note: Date filtering can also be done using the 'Date Range' facet available on the left column.

These can also be mixed and matched e.g.,

caseslinked:{0 TO 5]

will match Techzone articles with linked cases 1 to 5 (0 is excluded)

Date Ranges: Metadata fields of type 'date' have format: **yyyy-mm-dd** and support ranges and more/less operator (just like numeric metadata), but do not support wildcards. Please note that the "TO" needs to be in upper case.

date:[2020-01-01 TO 2021-01-01]

date:>2021-01-01

Boolean Operators

+ term must be present

- term must not be present (negation)

AND - must be in capital letters (also written as **&&**)

OR - must be in capital letters (also written as **||**)

NOT - must be in capital letters (also written as **!**)

The default operator for Topic Search is **'AND'**. This means all terms in search query must be present in the result documents.

Familiar Boolean operators such as **AND**, **OR** and **NOT** are supported. When multiple operators are used together, use parentheses to specify precedence.

For example, this query **((nexus AND switch) OR (catalyst AND switch)) AND NOT 9000** specifies that

1. term 'switch' must be present in document
2. one of 'nexus' or 'catalyst' must be present
3. term '9000' must not be present

Other operators supported are + (term must be present) and - (term must not be present).

For example, this query **switch +nexus -9000** specifies that

1. 'nexus' must be present
2. '9000' must not be present
3. 'switch' is optional (if OR operator is used between terms). Its presence increases relevancy scores.

Example:

identifier:(CSCvb99135 OR CSCvu12566)

Fielded Search / Metadata search

Syntax is

<fieldname>:<value> (search can retrieve the partial match in value)

<fieldname.keyword>:<value> (search retrieves exact match in value and case sensitive)

<fieldname.exact>:<value> (search retrieves the exact match in value)

Note: there is no space after ':'

e.g., **status:D**

Please note that there is no space after the colon.

Fielded search can support *phrase* searches. If a Phrase (enclosed in quotes) is used for a fielded search, the entire string will be matched within the field.

<fieldname>:"<Phrase value>"

Each Topic Search data source has a certain structured metadata. For example, technology, sub-technology, problem code etc. for CSOne; project, component, version, state etc. for CDETs. As well there are metadata common to all data sources, such as date, title, etc.

Metadata is extremely helpful in narrowing down the search results, and fielded search allows you to search within metadata.

Available metadata fields are documented and available in the section: [Common Fields for all Data Sources](#).

Values support wildcards.

e.g., **project:CSC***

Multiple fields can be searched in the same query:

e.g. **crash component:aaa majorversion:6.06 found:customer**

finds customer-found bugs that have keyword crash anywhere, component aaa and version 6.06

Advanced Fielded Search Query:

e.g., **project:csc.embu product:enterprise_sdn component:maglev date:[2021-07-01 TO 2022-01-31] version:(DNAC2.2.2.6 OR DNAC2.2.2.8)**

If value contains spaces, surround it with double quotes.

e.g., **technology:"Data Center"**

Other Notes:

1. For many available fields, filters in the left rail on UI help you to filter on
2. field values without doing a fielded search within the search box Fielded search on text fields performs a 'contains' match.
3. The field name does not get highlighted in the results. Only the term used for the fielded search would be highlighted

Special Case: `_exists_` field can be used to find documents that have a non-null value for the specified field

e.g., **_exists_:problemcode**

Wildcards

Two types of wildcards are supported: single character '?' and multi-character '*'. The multi-character wildcard will also match zero characters. Wildcards could be useful in matching versions, addresses, product IDs, serial numbers, and more.

Implemented rules

1. Leading wildcard operator on search terms not supported. This is disabled to avoid performance impact on search engine.
e.g., ***9000** is not supported. * is treated as literal here.
2. Standalone wildcard characters are not implemented. “*” or “?” is treated as a literal here.
3. Only one “*” operator (not leading) supported on a search term
e.g., **cat9***
4. Up to three “?” operators (not leading) supported on a search term
e.g., **cat65??**
Cat?l??t

Note: Using wildcards in a phrase is considered as a general token and not a wildcard (e.g. **"ipv4-dhcp?relay"** => This might also match the string **"ipv4 dhcp#relay"** by tokenizing the special characters.

Wildcard Fielded Phrase search:

The `match\_bool\_prefix` query is designed to perform a Boolean prefix match on fields. This enables more flexible patterns-based searches when combined with wildcards in the query string.

It's recommended the usage of wildcard be only placed at the **end** of the query string to match different patterns. Rather than requiring a sequence of matches, it applies like contains match.

For example:

(i) *title:"Identity Services Engine Command **Inj*** Vulnerabil*"* => By matching zero or more characters for the wildcard *, it returns result for the title containing the given combination.

The screenshot shows the Cisco Topic Search interface. The search bar contains the query: `title:"Identity Services Engine Command Inj* Vulnerabil*"`. The search mode is set to 'Advanced'. The results are filtered by 'All Time' and show 1-6 of 6 results. The first result is titled 'PSIRT External - Cisco Identity Services Engine Command Injection Vulnerabilities' and details a high-severity vulnerability in Cisco Identity Services Engine (ISE) software. The second result is titled 'PSIRT External - Cisco Identity Services Engine Command Injection Vulnerabilities' and details a medium-severity vulnerability in Cisco Identity Services Engine (ISE) software. The third result is titled 'PSIRT External - Cisco Identity Services Engine Command Injection Vulnerabilities' and details a medium-severity vulnerability in Cisco Identity Services Engine (ISE) software. The fourth result is titled 'PSIRT External - Cisco Identity Services Engine Command Injection Vulnerabilities' and details a high-severity vulnerability in Cisco Identity Services Engine (ISE) software. The fifth result is titled 'PSIRT External - Cisco Identity Services Engine Command Injection Vulnerabilities' and details a high-severity vulnerability in Cisco Identity Services Engine (ISE) software. The sixth result is titled 'PSIRT External - Cisco Identity Services Engine Command Injection Vulnerabilities' and details a medium-severity vulnerability in Cisco Identity Services Engine (ISE) software.

(ii) *title:"Identity **Vulnerabil*** Serv* Engine Command **Inj***"* => Irrespective of token placement it also fetches the result by matching zero or more characters for the wildcard * like a contains match.

CISCO HIGHLY CONFIDENTIAL

Topic Search

Advanced Search Tips

Show results based on: View query details

Search Mode: ☐ Simple ☐ Literal ☒ Advanced

Filters

Data Sources

- ☐ All
- ☒ CSOne (0)
- ☒ CDETS (0)
- ☒ AppD Zendesk (0)
- ☒ CX Catalog (0)
- ☒ Policy Central(CPPC) (0)
- ☒ Newsgroup (0)
- ☒ Tech Zone (0)
- ☒ CX Training (0)
- ☒ Whiptail (0)
- ☒ BDB (0)
- ☒ PSIRT External (6)
- ☒ Webex Help Center (0)
- ☒ Field Notice (0)

Filters

Search All Filters

Date Range

Refresh Last Year (7)

1-6 of 6 results from

Simple Detailed

Sort By Relevance

PSIRT External - Cisco **Identity Services Engine Command Injection Vulnerabilities**
cisco-sa-ise-injection-QeXegrCw Cisco Identity Services Engine Command Injection Vulnerabilities High Cisco Identity Services Engine Software CSCwd07353
Last Updated Date: 2023-11-01 Advisory ID: cisco-sa-ise-injection-QeXe... First Published: 2023-11-01 Product Names: Cisco Identity Services E...
Severity: High

PSIRT External - Cisco **Identity Services Engine Command Injection Vulnerabilities**
cisco-sa-ise-injection-sRQn9E09 Cisco Identity Services Engine Command Injection Vulnerabilities Medium Cisco Identity Services Engine Software CSCwd30039
Last Updated Date: 2023-05-17 Advisory ID: cisco-sa-ise-injection-sRQn... First Published: 2023-05-17 Product Names: Cisco Identity Services E...
Severity: Medium

PSIRT External - Cisco **Identity Services Engine Command Injection Vulnerabilities**
cisco-sa-ise-injection-2XbOg9Dg Cisco Identity Services Engine Command Injection Vulnerabilities Medium Cisco Identity Services Engine Software CSCwd07349
Last Updated Date: 2023-04-05 Advisory ID: cisco-sa-ise-injection-2XbO... First Published: 2023-04-05 Product Names: Cisco Identity Services E...
Severity: Medium

PSIRT External - Cisco Evolved Programmable Network Manager, Cisco Identity Services Engine, and Cisco Prime Infrastructure **Command Injection Vulnerabilities**
cisco-sa-adeos-MLAyEcvk Cisco Evolved Programmable Network Manager, Cisco Identity Services Engine, and Cisco Prime Infrastructure Command Injection Vulnerabilities
Last Updated Date: 2023-04-05 Advisory ID: cisco-sa-adeos-MLAyEcvk First Published: 2023-04-05 Product Names: Cisco Identity Services E...
Severity: High

PSIRT External - Cisco **Identity Services Engine Local Command Injection Vulnerability**
cisco-sa-20180307-ise3 Cisco Identity Services Engine Local Command Injection Vulnerability Medium Cisco Identity Services Engine Software CSCv49844 NA
Last Updated Date: 2018-03-07 Advisory ID: cisco-sa-20180307-ise3 First Published: 2018-03-07 Product Names: Cisco Identity Services E...
Severity: Medium

PSIRT External - Cisco Identity Services Engine Command Injection to Underlun Operation System Vulnerability

Limitations:

a) It is recommended placing wildcard at the end of the token, rather than at the beginning of query strings, which are resource intensive.

b) It will not work if the given fielded search phrase contains any special characters like /,;,?,* etc. (e.g., **title:"why contain*?"**; defectgroupid:CSC*_1) => **It will work if we modify the query as title:"why contain*"**

c) This applies only for Advanced Search mode.

d) The given fielded search phrase should not contain any trailing spaces within the quotes. (e.g., **title:"Identity Services Engine Command Injection Vulnerabil*"** => **Trailing space provides inaccurate results.**

e) Wildcard search unlikely to work in a substring (e.g. **ipv4-dhcpd-relay-202*** is a substring within **showtech-BO-NCS540-ipv4-dhcpd-relay-2023-Nov-21.101904.EST.tgz.** and it will retrieve results upon providing it as **showtech-BO-NCS540-ipv4-dhcpd-relay-202*)**

Fuzzy Search

Fuzzy search permits you to find tokens that match search terms at least to a specified degree.

Syntax is: **<term>~<optional edit distance>**

The default editing distance is 2. This feature uses Damerau-Levenshtein distance to find all terms with a maximum of two changes, where a change is the insertion, deletion or substitution of a single character, or transposition of two adjacent characters.

e.g., **nexes~** this will find nexus as a potential term.

See http://en.wikipedia.org/wiki/Damerau-Levenshtein_distance

One of the useful applications of fuzzy search is searching for terms with typos. When no suitable matches are found for the query, one could try matching key terms with fuzzy search - to include matches with typos.

e.g., **title:nexes~**

Frequently used field names for Advanced search:

These are the metadata field names one can use in advanced search

Note: field names should be in lowercase!

Field names are listed in the section below: [Common Fields for all Data Sources](#)

Literal Search

Literal search aims to find all the documents that have exact matches (including special characters except double quotes) for all the tokens in the search query.

Note: If you intend to search for a continuous content string copied from a document and it has special characters in some of the tokens, literal search is the best search mode for this. It is recommended to put such strings in double quotes for best results. Please ensure that while copying strings from a document for literal search, the entire words/tokens are copied along with any special characters at the end.

e.g.

If you intend to do a literal search for **awk '{print \$1 ":" \$2}';**

- Please make sure all special characters are included
- Escape double quotes with a backslash
- Put the complete string in quotes

Final query will look like this **"awk '{print \$1\ ":" \$2}';"**

*Note: if there are one or more phrases (surrounded by double quotes) in the search query, they will be retained as phrases while performing literal search. This means that the double quote characters are not converted to a literal match. If you need a double quote character to be part of the literal search, please escape it using a **backslash**.*

Literal Search can be triggered using the 'search mode' button below the search box or by using 'literal search' option above the organic results. Literal search can be performed on both simple and advanced search queries. For advanced search queries limited to the following fields (title, resolutionsummary, problemdescription, customersymptom, actionplan). In Literal Search, keywords can be highlighted in the snippets separately, but the result document must contain the exact literal at least once.

e.g., search for **MISC_FATAL_ERROR** with the search mode set as “**Literal**” should return the result content containing exact literal i.e., **MISC_FATAL_ERROR** without any leading or trailing special characters.

[illegible]

e.g., search for **rm -rf** with search mode set as "Literal" will return exact matches for the string (and *not* convert it as an advanced search query with not condition applied to rf).

 Topic Search

☐ Show results based on:

Search Mode: ☐ Simple ☒ Literal ☐ Advanced 

Some examples of Literal searches

- `sudo rm -rf`
- `tar -xvzf /cisco/software/images/onprem-0.0.1-332.tar.gz -C .`
- `VPN_GROUP_100 service-policy qos_policy_4class_10Mbps`
- "Internal error, Lock of ipv6_sisf_engine_semaphore failed" aaron click-ap
- "intel(r) xeon(r) cpu d-1526 @ 1.80ghz"
- "in failure state.txt vm1#show sdw"
- title:13%
- title:Title:A-FLEX-3//having
- resolutionsummary:ISR4351-AXV/K9

An option to perform Literal search will also be shown when there are no results using advanced search **AND** operator and the search engine has opted to display results using **OR** operator

1-20 of 1720616 results from ⓘ

Past 3 Years

All Time

Simple

Detailed

Add User ID boost

Sort By

Relevance ▼

Showing advanced search results using OR operator. "Internal error, Lock of ipv6_sisf_engine_semaphore failed" aaron click-ap

No matches found using AND operator. "Internal error, Lock of ipv6_sisf_engine_semaphore failed" aaron click-ap

Perform a [literal search](#) instead?

Note:

"Literal search" still is not GREP. It is an attempt to get close to that with what is available in elastic. Phrase fielded search on Literal mode, will not fetch results. (e.g. title:"13%")

Literal Search Fields

Literal search is not available for all fields of all documents. Literal Search applies to the following fields in the following data sources:

Source	Literal Search Field Names	Elastic Field Names
COMMON for ALL DS	title	title
AIX	content	identifier
AIX		version
AIX		updatedby
AIX		lockedby
AIX		title
AIX		type
AIX		status
AIX		certificationstatus
AIX		overallrulestatus
AIX		owner
AIX		creator
AIX		contributor
AIX		tags
AIX		description
AIX		recommendation
AIX		correctiveaction
AIX		caveat
AIX		hardware
AIX		audiencetype
AIX		software
AIX		operatingsystem
AIX		productid
AIX		groupname
AIX		productfamily
AIX		producttype
AIX		networksolutions
AIX		technology
AIX	description	description
AIX	recommendedaction	recommendedaction
Anonymized Case RCAs	title	title
Anonymized Case RCAs	content	content

AppD Zendesk	content	description
AppD Zendesk		comments
AppD Zendesk		assignerid
AppD Zendesk		customersupporttype
AppD Zendesk		organization
AppD Zendesk		group
AppD Zendesk		controllerversion
AppD Zendesk		agentversion
AppD Zendesk		component
AppD Zendesk		subcomponent
AppD Zendesk		resolution
AppD Zendesk		problemarea
AppD Zendesk		problemtype
AppD Zendesk		escalationsource
AppD Zendesk		productarea
AppD Zendesk		parentid
AppD Zendesk		parentcustomername
BDB	content	title
BDB		tags
BDB		similar
BDB		srclanguage
BDB		contributors
BDB		author
BDB		description
BEMS	content	identifier
BEMS		title
BEMS		resolutionsummary
BEMS		assistance
BEMS		troubleshooting
BEMS		customersentiment
BEMS		engagementupdates
BEMS		productfamily
BEMS		product
BEMS		sourcecomponent
BEMS		submitterid
BEMS		customername
BEMS		owner
BEMS		ownerfullname
BEMS		submitterfullname
BEMS		srnumber
BEMS	troubleshooting	troubleshooting
BEMS	resolutionsummary	resolutionsummary
BEMS	customersentiment	customersentiment
BEMS	engagementupdates	engagementupdates
Broadhop	description	description
Broadsoft	description	description

Callinghelp	description	description
CDETS	content	assignerid
CDETS	content	component
CDETS		demanager
CDETS		depriority
CDETS		engineer
CDETS		found
CDETS		product
CDETS		project
CDETS		severity
CDETS		status
CDETS		submitterid
CDETS		duplicateof
CDETS		description
CDETS		software
CDETS		customervisible
CDETS		notcustomervisiblereason
CDETS		hardware
CDETS		careupdate
CDETS		platform
CDETS		windowenv
CDETS		windowver
CDETS		resolverid
CDETS		majorversion
CDETS		class
CDETS		frequency
CDETS		osversion
CDETS		sector
CDETS		urgency
CDETS		allcasesclosed
CDETS		updatedby
CDETS		defecttype
CDETS		cdetsseverity
CDETS		branch
CDETS		forwardedfrom
CDETS		infoawaiting
CDETS		ostype
CDETS		held
CDETS		attribute
CDETS		applyto
CDETS		integratedreleases
CDETS		tobefixed
CDETS		version
CDETS		troubletickets
CDETS		keywords
CDETS		relateddefects

CDETS		otheremail
CDETS		enclosures
CDETS		codereviewer
CDETS	description	description
CDETS	enclosures	enclosures
CHP	content	role
CHP		release
CHP		product
CHP		operatingsystem
CHP		activities
CHP		type
CHP		tags
CHP		model
CHP		devices
CHP		title
CHP		description
CHP		status
CHP		identifier
CHP	description	description
Composite	resolutionsummary	resolutionsummary
CSOne	content	status
CSOne		company
CSOne		contactname
CSOne		email
CSOne		helpdesknum
CSOne		owner
CSOne		routername
CSOne		problemcode
CSOne		resolutioncode
CSOne		technology
CSOne		subtech
CSOne		contractid
CSOne		contractstatus
CSOne		contracttype
CSOne		csone
CSOne		hwproducttype
CSOne		protocol
CSOne		sitename
CSOne		swproducttype
CSOne		swversion
CSOne		thirdpartyticketnumber
CSOne		vendor
CSOne		ccoid
CSOne		resolutionsummaryby
CSOne		product
CSOne		productfamily

CSOne		creator
CSOne		siteid
CSOne		tag
CSOne		linkeddefects
CSOne		keywords
CSOne		additionalEmail
CSOne		serialnumber
CSOne	resolutionsummary	resolutionsummary
CSOne	description	description
CSOne	actionplan	actionplan
CSOne	problemdescription	problemdescription
CSOne	customersymptom	customersymptom
FieldNotice	content	identifier
FieldNotice		title
FieldNotice		author
FieldNotice		recommendedaction
FieldNotice		distribution
FieldNotice		type
FieldNotice		tags
FieldNotice		bugid
FieldNotice	recommendedaction	recommendedaction
GNOSIS	content	identifier
GNOSIS		author
GNOSIS		filename
GNOSIS		type
GNOSIS		contributor
GNOSIS		lifecycle
GNOSIS		rules
GNOSIS		rules
GNOSIS		rules
GNOSIS		condition
GNOSIS		title
GNOSIS		symptom
GNOSIS		description
GNOSIS		distribution
GNOSIS		bugid
GNOSIS		product
GNOSIS		cdetsproduct
GNOSIS		project
GNOSIS	description	description
GNOSIS	condition	condition
GNOSIS	symptom	symptom
Intucell	description	description
Jira AMP	description	description
Jira AMP	enclosures	enclosures
Jira Webex	description	description

Jira Webex	enclosures	enclosures
Lancop	description	description
Licensing	description	description
PSIRTSEexternal	content	identifier
PSIRTSEexternal		title
PSIRTSEexternal		severity
PSIRTSEexternal		productnames
PSIRTSEexternal		bugid
PSIRTSEexternal		identifier
PSIRTSEexternal		title
ServiceGrid	description	description
Sourcefire	description	description
TacWiki	description	description
Tandberg	description	description
TechZone / NPI Training	content	articletype
TechZone / NPI Training		author
TechZone / NPI Training		board
TechZone / NPI Training		associatedcase
TechZone / NPI Training		status
TechZone / NPI Training		title
TechZone / NPI Training		labels
Templates	content	identifier
Templates		title
Templates		author
Templates		owner
Templates		contributor
Templates		createdby
Templates		trustlevel
Templates		filename
Templates		status
Templates		tags
Templates		collateralttype
Templates		businessservice
Templates		audiencetype
Templates		itservicemgmt
Templates		servicetype
Templates		technology
Templates		architecture
TSTraining		title
TSTraining		description
TSTraining		organization
TSTraining		skilllevel
TSTraining		bu
TSTraining		spriority
TSTraining		tags
TSTraining		technology

TSTraining		mimetype
TSTraining		creator
TSTraining		categories
TSTraining		objective
TSTraining		npitechnology
TSTraining	description	description
Ubiquisys	description	description
Umbrella Zendesk	content	description
Umbrella Zendesk		comments
Vidcast	content	content
Vidcast	title	title
Viptela	description	description

Data Source Update frequency in Topic

Sources	Crawl Frequency
Anonymized Case RCAs	Near Real Time (If c3 metadata gets updated, sync to anon rca happens once in a day)
NPI Training	Every 30 minutes
CDC	Near Real Time
AIX	Every 4 hours
CX Catalog	Once a day
BEMS	Every 4 hours
JIRA Webex	Data PUSH from Jira Webex Team
JIRA AMP	Data PUSH from Jira AMP Team
Templates	Every 4 hours
Accedian	Monthly incremental Update (most recent update Dec 31st, 2024)
Umbrella Zendesk	Monthly incremental Update (most recent update Sep 30, 2024)
CX Training	Once a day
BDB	Every 1 hour
CDETS	Near Real Time
CSOne	Near Real Time
POLICY CENTRAL(CPPC)	Every 6 hours
PSIRT External	Every 1 hour
Asapedia	Once a day
PSIRT Internal	Once a day
Sourcefire	Static source
Newsgroup	Data is populated to Tech Zone
Techzone	Every 30 mins
DCP	Every 4 hours
Field Notice	Every 12 hours
Webex Help Center	Every 1 hour
Licensing	Data PUSH from Licensing Team
CIAM	Once a day
Broadsoft SVN	Once a day

IT-Wiki	Once a day
Gnosis	Once a day

Common Fields for all Data Sources

Field name	Type	Meaning
date (Date Range Filter)	date	Creation date mapped for C3, CDETS, Newsgroup, CX Training, Dynamicsoft, Acano, Broadhop, Jira Webex, Exablaze, Lancop, Cliqr, Ubiquisys, Whiptail, Viptela, Starent, Tandberg, Intucell, Newscale, Sourcefire, ServiceGrid, Shogun, AIX, AS Templates (ICT), BEMS, BDB, Gnosis & PISIRT External, Vidcast Last Updated date mapped for DCP, IT Wiki, Webex Help Center, Field Notice, Tech Zone, ASApedia, Broadsoft SVN, Licensing, Cisco.com, Cisco DNA Spaces. Resolved date mapped for Composite.
title	string	Document title
source	string	Name of the source.
content	string	Anything which is not metadata is text
url	string	URL of the document

Acano fields

Field Name	Type
identifier	numeric
status	string
customername	string
resolvedon	date
bugid	numeric
company	string

Accedian fields

Field Name	Type
casenumber	string
date	date
accountname	string
contactname	string
contactphone	string
contactemail	string

skylightsupport	string
skylightsupportexpiration	string
caseowner	string
externalchattoolid	string
type	string
spriority	string
product	string
softwarerelease	string
softwarereleaseother	string
rmanumber	string
serialnumber	string
jirakey	string

AIX Fields

Field name	Type
lastupdateduser	string
islocked	string
lockedby	string
numberofratings	number
type	string
checkoutstatus	string
owner	string
author	string
contributingauthors	string
hardware	string
ciscosoftware	string
ostype	string
networksolutions	string
icctechnology	string
usagecount	number
Id	string

Anonymized Case RCAs Fields

Field name	Type	Meaning
identifier	string	SR number, ex. 610001234
csone	string	CSOne SR id, ex. 1104121234
priority	numeric	SR priority (1 to 4)
lastmodifieddate	date	Date of last update of the bug
casestate	string	SR State, ex. Closed, Customer Pending, Restoration of Service etc. Look at the “SR State” filter at the left to find out possible values

linkeddefects	string	String of bugs linked to this SR. Can use this to find SRs that have bugs attached linkeddefects:csc*
technology	string	SR Technology, ex. LAN Switching, Data Center, and Storage Networking. Look at the “Technology” filter at the left to glean possible values, along with subtech this is good general filter to reduce results
subtech	string	Subtechnology, e.g. “Nexus 7000 Series Switch - Switching Issue”. To see a list of possible values, match a single keyword and glean “Subtechnology” filter values at the left. For example, subtech:nexus
problemcode	string	Problem code, ex. Configuration Assistance, Software Failure etc.
resolutioncode	string	Resolution code, ex. Software Configuration, Software Upgrade - Existing Defect etc.
defectcount	numeric	Defects/Bugs related to the SR
fduration	numeric	Duration in decimal
bwithbug	boolean	Boolean value set if have defect associated
icomplexity	string	
status	string	
voltroncomponentaffected	string	

AppD Zendesk Fields

Field Name	Type
identifier	int32
assignerid	string
customersupporttype	string
organization	string
group	string
controllerversion	string
agentversion	string
component	string
subcomponent	string
resolution	string
problemarea	string
problemtype	string
escalationsource	string
productarea	string
parentid	string
parentcustomername	string
tags	string
escalationticket	int32

AS Templates (ICT) Fields

Field name	Type
author	string
owner	string
contributingauthors	string
trustlevel	string
isprivate	string
createdby	string
createdate	date
numberofratings	number
usagecount	number
downloadsct	number
templatefilename	string
checkoutstatus	string
ictags	string
collateraltype	string
businessservice	string
audiencetype	string
itservicemanagement	string
servicetype	string
mdftechnology	string
tmplarchitecture	string
Id	string

ASApedia Fields

Field name	Type
keywords	string

BDB Fields

Field name	Type
author	string
srclanguage	string
uses	string
addiction	string
trending	string
creationdate	date

labels	string
similar	string
lastuseon	date
reliability	numeric
updated	date
filename	string
tags	string
code	string

BEMS Fields

Field name	Type
productfamily	string
srnumber	number
casenumber	number
customername	string
submitterfullname	string
ownerfullname	string
caseowner	string
assistance	
component	
customersentiment	
product	
resolutionsummary	
subtech	
technology	

Broadhop fields

Field name	Type
caseowneralias	string
created	date
accountnamecountry	string
owner	string
spriority	
status	string
identifier	

Broadsoft SVN Fields

Field name	Type
docutype	string
vendor	string
release	string

BORG Alerts Fields

Field name	Type
identifier	string
externaltitle	string
module	string
severitytext	string
resulttype	string
filename	string
borggateway	string
runtype	string
name	string
external_text	string

Note - Only the last 3 months of data will be available in the BORG Alerts data source.

CDETS Fields

Field name	Type	Meaning
identifier	string	Bug ID, ex. CSCee10005
found	string	Where bug was found:customer-use, dev-test etc.
lastupdated	date	Date of last update of the bug
cdetsseverity	numeric	CDETS bug severity: 1, 2, 3, 7 etc.
severity	string	CDETS bug severity: e.g., catastrophic, severe, moderate etc.
status	string	CDETS bug state: N, A, I, R, V, J, C etc.
Project	string	CDETS project, e.g., CSC.sys, CSC.datacenter
product	string	CDETS product, e.g., cat6500
component	string	CDETS component, e.g., ospf
version	string	CDETS version field, e.g., 12.2(33)SXF14a
integratedreleases	string	CDETS integrated releases field
attribute	string	CDETS attribute field
submitterid	string	Username of submitter of the bug
demanager	string	DE manager of the bug
engineer	string	DE of the bug
resolvedon	date	CDETS bug resolved date
releasenote	string	CDETS release notes enclosure
ticketscount	numeric	Tickets associated or linked to CDETS bug id.
headline	string	Brief description of the Bug similar to title.

keywords	string	Bug keywords name ex: rel-crystal.
isoib	boolean	bug is OIB.
withdiffs	boolean	.
withtickets	boolean	.
isss	boolean	bug is SS
majorversion	string	Derived from the version field.
description	string	
duplicateof	string	
sourcepath	string	
ticketscountdirect	numeric	
customervisible	string	
relateddefects	string	
software	string	
troubletickets	string	
versions	string	
visiblereason	string	
psirtcves	string	CDETS - PSIRT CVEs
defectgroupid	string	CSCwi42894-0

Ciam Fields

Field Name	Type
date	date

Cisco DNA Spaces (Zendesk) Fields

Field Name	Type
assignerid	string
date	date
updated	date
cloudservice	string
email	string
identifier	string
spriority	string
severity	string
status	string
submitterid	string
type	string

Cisco.com Fields

Field name	Type
cdccontenttype	string
conceptparent	string
concept	string

CliQr Fields

Field Name	Type
identifier	keyword

Composite Fields

Field Name	Type
assignerid	string
customername	
type	string
identifier	string
spriority	string
reporter	
resolutionsummary	
resolvedon	
severity	string
status	string

CSOne Fields

Field name	Type	Meaning
identifier	string	SR number, ex. 610001234
csone	string	CSOne SR id, ex. 1104121234
priority	numeric	SR priority (1 to 4)
lastmodifieddate	date	Date of last update of the bug
casestate	string	SR State, ex. Closed, Customer Pending, Restoration of Service etc. Look at the “SR State” filter at the left to find out possible values
linkeddefects	string	String of bugs linked to this SR. Can use this to find SRs that have bugs attached linkeddefects:csc*

technology	string	SR Technology, ex. LAN Switching, Data Center, and Storage Networking. Look at the “Technology” filter at the left to glean possible values, along with subtech this is good general filter to reduce results
subtech	string	Subtechnology, e.g. “Nexus 7000 Series Switch - Switching Issue”. To see list of possible values, match single keyword and glean “Subtechnology” filter values at the left. For example, subtech:nexus
problemcode	string	Problem code, ex. Configuration Assistance, Software Failure etc.
resolutioncode	string	Resolution code, ex. Software Configuration, Software Upgrade - Existing Defect etc.
swproducttype	string	Software product type, ex. “N9000 NX-OS Nexus 9000 NX-OS SW Release”
company	string	Company name
contractid	numeric	Contract number
contractstatus	string	Contract status, e.g., active, overdue, expired, terminated etc
contactname	string	Customer contact name for SR
creator	string	Case Creator
owner	string	SR owner from Cisco side
srserialnum	string	Serial number of the service request
ccoid	string	Ccoid of the internal/external customer
resolutionsummary	string	Resolution summary of the SR
problemdescription	string	Brief summary of the case description
defectcount	numeric	Defects/Bugs related to the SR
swversion	string	Software version of the product
hwproducttype	string	Hardware Type name
fduration	numeric	Duration in decimal
bwithbug	boolean	Boolean value set if have defect associated
additionalemail	string	
caseid	string	
customersymptom	string	
icomplexity	string	
sitename	string	
status	string	
thirdpartyticketnumber	string	
actionplan	string	Action plan of the SR
radkitserialnum	string	
voltroncomponentaffected	string	

CX Catalog Fields

Field Name	Type
architecture	string
assettypes	string
author	string

contributors	string
csdlid	string
csdlstatus	string
customers	string
dependants	string
isarchived	boolean
isxpmcertified	boolean
itemtype	string
cxcataloglifecycles	string
rating	integer
repourl	string
supportmodels	string
tags	string
targetaudiences	string
technicalqualifiers	strings
outcomes	string
usecases	string

CX Training Fields

Field name	Type
tags	string
creator	string
size	number
duration	number
npitechnology	string
objective	string
sourceorg	string
skilllevel	string
bu	string
priority	string
tacttechnology	string
categories	string
mimetype	string
creationdate	date
courseurl	string

DCP Fields

Field name	Type
------------	------

dcptitle	string
author	string
dcpcontentid	string
contentsummary	string
dcpcontentcategory	string
dcpversion	string
projectid	string
customername	string
contentowner	string
contributors	string
contentlastmodifieddate	date
contentstatus	string
keywords	string
contentorgsecurity	string

Dynamicsoft Fields

Field Name	Type
severity	string
contactname	string
created	date
identifier	
owner	string
sitename	string

Exablaze Fields

Field name	Type
identifier	string
brandname	string
requestername	string
requesteremail	string
organization	string
agentname	string
teamname	string
status	string
spriority	string
postcount	string

Field Notice Fields

Field name	Type
subject	string
identifier	string
relateddefects	
datemodified	
distribution	
exturl	

Gnosis Fields

Field name	Type
author	string
condition	string
contributor	string
description	string
distribution	string
bugid	string
lifecycle	string
product	string
type	string
symptom	string
filename	string
cdetsproduct	string
project	string
identifier	string
created	

Guided (GPS-lite) Workflows Fields

Field name	Type
tech	string
issue	string
subissue	string
author	string

Intucell Fields

Field Name	Type
caseowneralias	string

created	date
accountname	string
caseowner	string
assignerid	string
status	string
type	
spriority	
categories	

IT Wiki Fields

Field Name	Type
author	string
ceccompositetags	string
contentcategory	string

Jira AMP Fields

Field Name	Type
identifier	string
project	string
issuetype	string
jiraapriority	string
component	string
labels	string
status	string
resolution	string
majorversion	string
version	string
assignerid	string
submitterid	string
description	string
created	date
updated	date
bugid	string
comments	string
jiraemail	string
srnumber	string
epiclink	string
resolvedon	date

subtasks	string
linkedissues	string
jiraurgency	string

Jira Webex Fields

Field Name	Type
identifier	string
project	string
issuetype	string
jirapriority	string
component	string
labels	string
status	string
resolution	string
majorversion	string
version	string
assignerid	string
submitterid	string
description	string
created	date
updated	date
bugid	string
comments	string

Lancope Fields

Field Name	Type
closedon	Date
bugid	string
escalationticket	
status	string
systemversion	string
version	
owner	string
severity	numeric
identifier	numeric
accountname	string
problemtype	string
origin	string

Licensing Fields

Field Name	Type
date	date

Newscale Fields

Field Name	Type
createdate	date
identifier	numeric
site	string
severity	string
owner	string
contactname	string

Newsgroup Fields

Field name	Type	Meaning
from	string	Email address and name of sender
newsgroup	string	Newsgroup of the article
articlecount	Integer	

Policy Central (CPPC) Fields

Field name	Type
date	date

PSIRT External Fields

Field name	Type
firstpublished	date
advisoryid	string
productnames	string
severity	string

PSIRT Internal Fields

Field name	Type
------------	------

date

date

Service Grid Fields

Field Name	Type
closedon	date
platform	
categories	string
spriority	string
problemtype	string
customername	string
businessservice	string
contactname	string
contactaccountnamecountry	string

Shogun Fields

Field name	Type
size	

Sourcefire Fields

Field Name	Type
assetid	
assetname	string
serialnumber	
identifier	
closedon	
contactaccount	
escalatedon	
resolvedon	
contactname	
parentcaseid	
version	
bugid	
type	
company	
origin	
owner	

status	
spriority	

Starent Fields

Field Name	Type
identifier	
owner	string
contactname	string
severity	string
Status	

Tandberg Fields

Field Name	Type
owner	string
contactname	string
identifier	numeric
severity	string

Tech Zone / NPI Training Fields

Field name	Type	Meaning
date	date	For Techzone, this field represents the last modified date
board	string	Board name, ex. ASA Firewall, Routing Protocols
style	string	Document style: tkb, forum.
author	string	No prizes for guessing what this is
labels	string	TZ Labels, ex. Troubleshooting, CUCM, System etc
hascaseslinked	boolean	Whether document has SRs linked to it, values: true or false
caseslinked	numeric	Count of linked SRs
views	numeric	How many times has this document been viewed on TZ
haskudos	boolean	Whether document has kudos
kudos	numeric	Count of kudos
articletype	string	Content type of the TechZone document
associatedcase	string	SR ticket linked to TechZone document
status	string	State of the TechZone article, example: "Open/Closed/Answered"
cqfscore		
keywords		
replies		
created	date	Creation date

NPI Training Fields (exclusive other than Techzone fields)

Field Name	Type
npi_technology	string
npi_audience	string
npi_target_fcs_ga	string
npi_prod_family	string

Ubiquisys Fields

Field Name	Type
version	
customeraffecting	
description	string
fixversions	
severity	
jiraissue	string
phase	
reporter	
resolvedon	
rootcause	
assignerid	string
problemtype	string
customername	string
spriority	string
status	string

Umbrella Zendesk Fields

Field Name	Type
brand	string
group	string
identifier	integer
requesteremail	string
assignerid (assignee's value)	string
title	string
component	string
subcomponent	string
trigger	string

closecode	string
issuetype	string
spriority	string
date	date
resolvedon	date
content	string
bemsid	string
cdetsid	string
linkedjiraaid	string
tags	string

Vidcast Fields

Field Name	Type
identifier	numeric
title	string
type	string
created	date
author	string
authoremail	string
topics	string
conversationtype	string
language	string

Viptela Fields

Field Name	Type
accountname	string
identifier	numeric
origin	string
problemtype	string
collaborators	string
customername	string
description	string
email	string
frudescription	string
part	string
jiraissue	
owner	string

product	string
productmodule	string
rmanumber	
rmserialnumber	
serialnumber	
softwarerelease	
status	string

Webex Help Center (Collab help Portal) Fields

Field name	Type
activities	date
activitytype	string
model	
devices	string
operatingsystem	
productnames	string
integratedreleases	
role	string
identifier	string
title	
viewcount	
helpcount	string
keywords	

Whiptail Fields

Field Name	Type
status	string
type	string
spriority	string
accountname	
identifier	
origin	
owner	string
problemtype	
closedon	date
date	date
escalated	
escalatedto	
serialnumber	

Appendix: Topic Queries Cheat Sheet

Search Modes

Operator	Description	Example
Simple	Most basic search with query terms	CC Details
Literal	Search for the exact string match as is <i>* Note quotes within string need to be escaped with backslash</i>	"for syspkg in \$(maglev catalog system_update_package display -v grep partial awk '{print \$1\"\":\"\$2}');"
Advanced	A search with one or more operators presents (boolean, phrase, search in specific fields, ranges, wildcards, fuzzy search etc.)	linkeddefects:CSCvg64969 linkeddefects.keyword:CSCwa47133

Common Operators

Operator	Description	Example
?	? is a single character wildcard. Up to 3 ? are supported	catalyst65???
*	* is a multi-character wildcard. <i>Leading wildcard not supported.</i>	cat9*
title:< term / phrase>	Search just the title of an SR/bug/article for a term.	title:"unexpected reload"
date:>yyyy-mm-dd	Search for something that first appeared on the date given.	date:>2021-01-01
date:[yyyy-mm-dd TO yyyy-mm-dd]	Search for something that first appeared within date range given. <i>* Note: "TO" should be in upper case</i>	date:[2020-01-01 TO 2021-01-01]
term~#	Fuzzy Searches "your-term" for similar words within edit distance specified	nexes~2
[min TO max]	Inclusive Numeric ranges	caseslinked:[0 TO 5]
{min TO max}	Exclusive Numeric ranges	caseslinked:{0 TO 5}

Common SR Searches

Usage	Description
linkeddefects:CSC*	Any SR with a bug attached to it
-linkeddefects:CSCvg64969	Exclude results with a specific bug attached
technology:tech-name	Any SR opened in a specific technology space (e.g., LAN Switching)
subtech:"subtech name"	Any SR opened in a specific subtech technology (e.g., Cat4000)
resolutioncode:hardware	Any SR closed for a specific reason (e.g., hw failure)
casestate:closed	Any SR matching the current case state (Ex: closed)

Common CDETS Searches

Usage	Description
-------	-------------

project:CSC.sys	Any defect in the specific project space
found:customer-use	Only externally found defects seen by customers
severity:<4	Defect of severity 1, 2 or 3
status:R OR status:V	Defect in a Resolved or Verified state
ticketscount:>0	Bug with at least 1 SR attached already
integratedreleases:21.23.9	Any defect with a software fix in this release

Common TechZone Searches

Usage	Description
style:tkb or style:forum	Techzone Knowledge Board or forum results
state:answered	Forum posts that are marked as answered only
board:boardname	Techzone articles specific to a general board
caseslinked:>0	Article or posts with at least 1 SR linked to it.
ticketscount:>0	Bug with at least 1 SR attached already
kudos:>5	Articles or posts with 6 or more Kudos given.

Common Newsgroup Searches

Usage	Description
newsgroup:email-alias	Search any discussion for this specific alias or group (e.g., cisco.gurus.macintosh)