

COEN 241 HW 1

System vs OS Virtualization

Ruopu He

W1650128

Detailed configurations of your experimental setup

CPU: Apple M2

Memory: 8 GB

OS: macOS Monterey version 12.6

Disk space: 256 GB



main steps to enable a QEMU VM

Install QEMU by brew:

```
brew install qemu
```

Create a hard disk:

```
qemu-img create -f qcow2 disk.qcow2 10G
```

Run QEMU with following commands to install Ubuntu:

```
qemu-system-aarch64 \
  -accel hvf -cpu cortex-a57 -M virt,highmem=off -m 2048 -smp 2 \
  -drive file=/opt/homebrew/Cellar/qemu/7.1.0/share/qemu/edk2-aarch64-
  code.fd,if=pflash,format=raw,readonly=on \
  -drive if=none,file=disk.qcow2,format=qcow2,id=hd0 \
  -device virtio-blk-device,drive=hd0,serial="dummyserial" \
  -device virtio-net-device,netdev=net0 \
  -netdev user,id=net0 \
  -vga none -device ramfb \
  -cdrom /Users/ruopuhe/Downloads/ubuntu-20.04.5-live-server-arm64.iso \
  -device usb-ehci -device usb-kbd -device usb-mouse -usb \
  -nographic
```

```
ruopuhe — qemu-system-aarch64 -accel hvf -cpu cortex-a57 -M virt,highme...
Ubuntu 20.04.5 LTS ruopuhe ttyAMA0
ruopuhe login: ruopuhe
Password:
Welcome to Ubuntu 20.04.5 LTS (GNU/Linux 5.4.0-128-generic aarch64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

System information as of Mon 17 Oct 2022 10:11:10 AM UTC

System load:          0.13
Usage of /:            48.0% of 7.50GB
Memory usage:         10%
Swap usage:           0%
Processes:            114
Users logged in:      0
IPv4 address for eth0: 10.0.2.15
IPv6 address for eth0: fec0::5054:ff:fe12:3456

12 updates can be applied immediately.
To see these additional updates run: apt list --upgradable
```

Main steps to enable the Docker container

Install docker desktop:

```
brew install --cask docker
```

Start docker container:

```
open /Applications/Docker.app
```

Installed the docker image zyclonite/sysbench:

```
docker pull zyclonite/sysbench
```

Run sysbench and get my own image in docker:

```
docker run --rm -it --entrypoint /bin/sh zyclonite/sysbench
```

```
ruopuhe@Ruopus-MacBook-Pro ~ % docker run --rm -it --entrypoint /bin/sh zyclonite/sysbench
/ # touch Dockerfile
/ # vi Dockerfile
/ # exit
ruopuhe@Ruopus-MacBook-Pro ~ % docker ps
CONTAINER ID   IMAGE                COMMAND             CREATED        STATUS              PORTS
8f5904aa1281   zyclonite/sysbench   "/bin/sh"          40 minutes ago Up 40 minutes
471a0f0cba6b   zyclonite/sysbench   "/bin/sh"          About an hour ago Up About an hour
ruopuhe@Ruopus-MacBook-Pro ~ % docker images
REPOSITORY          TAG         IMAGE ID           CREATED          SIZE
docker101tutorial   latest      c47ee4f83ac0       5 hours ago     27.4MB
ruopuhe/docker101tutorial latest      c47ee4f83ac0       5 hours ago     27.4MB
alpine/git           latest      8bfbb50cd816       10 days ago     43.4MB
ubuntu               20.04      f12f227aa3fd       12 days ago     65.6MB
zyclonite/sysbench   latest      8731aa4184ff       10 months ago   9.19MB
```

```
dcoker commit 8f5904aa1281 my_sysbench
```

```

ruopuhe@Ruopus-MacBook-Pro ~ % docker commit 8f5904aa1281 my_sysbench
sha256:da60f980ef8c75480261730c79012b3172ef9de462046944cec1cefa36fda951
ruopuhe@Ruopus-MacBook-Pro ~ % docker images
REPOSITORY          TAG         IMAGE ID      CREATED        SIZE
my_sysbench          latest      da60f980ef8c  18 seconds ago 9.19MB
docker101tutorial    latest      c47ee4f83ac0  5 hours ago    27.4MB
ruopuhe/docker101tutorial latest      c47ee4f83ac0  5 hours ago    27.4MB
alpine/git           latest      8bfb50cd816   10 days ago    43.4MB
ubuntu               20.04      f12f227aa3fd  12 days ago    65.6MB
zyclonite/sysbench   latest      8731aa4184ff  10 months ago  9.19MB
ruopuhe@Ruopus-MacBook-Pro ~ % docker history my_sysbench
IMAGE              CREATED            CREATED BY          SIZE      COMMENT
da60f980ef8c       2 minutes ago     /bin/sh -c #(nop) CMD [ "--help" ]  31B
8731aa4184ff       10 months ago     /bin/sh -c #(nop) ENTRYPOINT [ "sysbench" ]  0B
<missing>          10 months ago     |1 version=1.0.20-r0 /bin/sh -c apk add --no...  0B
<missing>          10 months ago     /bin/sh -c #(nop) ARG version=1.0.20-r0  0B
<missing>          10 months ago     /bin/sh -c #(nop) LABEL description "Sysbenc...  0B
<missing>          10 months ago     /bin/sh -c #(nop) LABEL version "1.0.20"  0B
<missing>          10 months ago     /bin/sh -c #(nop) CMD [ "/bin/sh" ]  0B
<missing>          10 months ago     /bin/sh -c #(nop) ADD file:df538113122843069...  5.33MB

```

useful docker operations:

Check running docker containers:

`docker ps`

Check local docker images:

`docker images`

Commit a Docker image:

`docker commit <container ID><images_name>`

Shell scripts for running the experiment:

CPU-test.sh

`sysbench --test=cpu --cpu-max-prime=100000 --time=30 run`

`sysbench --test=cpu --cpu-max-prime=300000 --time=30 run`

`sysbench --test=cpu --cpu-max-prime=500000 --time=30 run`

FileIO-test.sh

`sysbench --threads=8 --test=fileio --file-total-size=1GB prepare`

`sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndrw --time=30 --max-requests=0 run`

`sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup`

`sysbench --threads=8 --test=fileio --file-total-size=1GB prepare`

`sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=seqwr --max-time=30 --max-requests=0 run`

`sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup`

`sysbench --threads=8 --test=fileio --file-total-size=1GB prepare`

`sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndwr --max-time=30 --max-requests=0 run`

`sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup`

Screenshots of the experiments

CPU test:

Run different prime numbers on both Docker and QEMU. All three tests result are shown as screen snapshots.

Docker:

Run sysbench: `docker run --rm -it --entrypoint /bin/sh my_sysbench`

Test 1: sysbench --test=cpu --cpu-max-prime=100000 --time=30 run

```
ruopuhe — com.docker.cli • docker run --rm -it --entrypoint /bin/sh my_sysbench — 113x36
[ruopuhe@Ruopus-MacBook-Pro ~ % docker run --rm -it --entrypoint /bin/sh my_sysbench
[/ # sysbench --test=cpu --cpu-max-prime=100000 --time=30 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.20-f6f6117dc4 (using bundled LuaJIT 2.1.0-beta2)

Running the test with following options:
Number of threads: 1
Initializing random number generator from current time

Prime numbers limit: 100000

Initializing worker threads...

Threads started!

CPU speed:
  events per second:   465.35

General statistics:
  total time:          30.0004s
  total number of events: 13961

Latency (ms):
  min:                 2.12
  avg:                 2.15
  max:                 11.12
  95th percentile:    2.22
  sum:                 29989.71

Threads fairness:
  events (avg/stddev):   13961.0000/0.00
  execution time (avg/stddev): 29.9897/0.00

/ # █
```

Test 2: sysbench --test=cpu --cpu-max-prime=300000 --time=30 run

```
ruopuhe — com.docker.cli • docker run --rm -it --entrypoint /bin/sh my_sysbench — 113x35
[/ # sysbench --test=cpu --cpu-max-prime=300000 --time=30 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.20-f6f6117dc4 (using bundled LuaJIT 2.1.0-beta2)

Running the test with following options:
Number of threads: 1
Initializing random number generator from current time

Prime numbers limit: 300000

Initializing worker threads...

Threads started!

CPU speed:
  events per second:   110.83

General statistics:
  total time:          30.0007s
  total number of events: 3325

Latency (ms):
  min:                 8.89
  avg:                 9.02
  max:                 36.11
  95th percentile:    9.22
  sum:                 29984.93

Threads fairness:
  events (avg/stddev):   3325.0000/0.00
  execution time (avg/stddev): 29.9849/0.00

/ # █
```

Test 3: sysbench --test=cpu --cpu-max-prime=500000 --time=30 run

```
ruopuhe — com.docker.cli • docker run --rm -it --entrypoint /bin/sh my_sysbench — 113x35
[/ # sysbench --test=cpu --cpu-max-prime=500000 --time=30 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.20-f6f6117dc4 (using bundled LuaJIT 2.1.0-beta2)

Running the test with following options:
Number of threads: 1
Initializing random number generator from current time

Prime numbers limit: 500000

Initializing worker threads...

Threads started!

CPU speed:
  events per second:   56.70

General statistics:
  total time:          30.0142s
  total number of events: 1702

Latency (ms):
  min:                 17.52
  avg:                 17.63
  max:                 46.23
  95th percentile:    17.63
  sum:                 30009.28

Threads fairness:
  events (avg/stddev): 1702.0000/0.00
  execution time (avg/stddev): 30.0093/0.00
/ # █
```

QEMU:

Run QEMU with 2 Cores, 2G memory:

```
qemu-system-aarch64 \
-accel hvf -cpu cortex-a57 -M virt,highmem=off -m 2048 -smp 2 \
-drive file=/opt/homebrew/Cellar/qemu/7.1.0/share/qemu/edk2-aarch64-code.fd,if=pflash,format=raw,readonly=on \
-drive if=none,file=disk.qcow2,format=qcow2,id=hd0 \
-device virtio-blk-device,drive=hd0,serial="dummyserial" \
-device virtio-net-device,netdev=net0 \
-netdev user,id=net0 \
-vga none -device ramfb \
-device usb-ehci -device usb-kbd -device usb-mouse -usb \
-nographic
```

Test 1: sysbench --test=cpu --cpu-max-prime=100000 --time=30 run

```
ruopuhe — qemu-system-aarch64 -accel hvf -cpu cortex-a57 -M virt,hig...
ruopuhe@ruopuhe:~$ sysbench --test=cpu --cpu-max-prime=100000 --time=30 run
WARNING: the --test option is deprecated. You can pass a script name or path on
the command line without any options.
sysbench 1.0.18 (using system LuaJIT 2.1.0-beta3)

Running the test with following options:
Number of threads: 1
Initializing random number generator from current time

Prime numbers limit: 100000

Initializing worker threads...

Threads started!

CPU speed:
  events per second:   514.46

General statistics:
  total time:          30.0018s
  total number of events: 15435

Latency (ms):
  min:                 1.91
  avg:                 1.94
  max:                 3.79
  95th percentile:    2.03
  sum:                 29988.74

Threads fairness:
  events (avg/stddev): 15435.0000/0.00
  execution time (avg/stddev): 29.9887/0.00

ruopuhe@ruopuhe:~$
```

Test 2: sysbench --test=cpu --cpu-max-prime=300000 --time=30 run

```
ruopuhe — qemu-system-aarch64 -accel hvf -cpu cortex-a57 -M virt,hig...
ruopuhe@ruopuhe:~$ sysbench --test=cpu --cpu-max-prime=300000 --time=30 run
WARNING: the --test option is deprecated. You can pass a script name or path on
the command line without any options.
sysbench 1.0.18 (using system LuaJIT 2.1.0-beta3)

Running the test with following options:
Number of threads: 1
Initializing random number generator from current time

Prime numbers limit: 300000

Initializing worker threads...

Threads started!

CPU speed:
  events per second:   118.81

General statistics:
  total time:          30.0037s
  total number of events: 3565

Latency (ms):
  min:                 8.32
  avg:                 8.41
  max:                 15.13
  95th percentile:    8.74
  sum:                 29998.95

Threads fairness:
  events (avg/stddev): 3565.0000/0.00
  execution time (avg/stddev): 29.9989/0.00

ruopuhe@ruopuhe:~$
```

Test 3: sysbench --test=cpu --cpu-max-prime=500000 --time=30 run

```
ruopuhe — qemu-system-aarch64 -accel hvf -cpu cortex-a57 -M virt,hig...
[ruopuhe@ruopuhe:~$ sysbench --test=cpu --cpu-max-prime=500000 --time=30 run ]
WARNING: the --test option is deprecated. You can pass a script name or path on
the command line without any options.
sysbench 1.0.18 (using system LuaJIT 2.1.0-beta3)

Running the test with following options:
Number of threads: 1
Initializing random number generator from current time


Prime numbers limit: 500000

Initializing worker threads...

Threads started!

CPU speed:
  events per second:    59.64

General statistics:
  total time:           30.0132s
  total number of events: 1790

Latency (ms):
  min:                  16.61
  avg:                  16.76
  max:                  29.58
  95th percentile:     17.32
  sum:                  30006.66

Threads fairness:
  events (avg/stddev):  1790.0000/0.00
  execution time (avg/stddev): 30.0067/0.00

ruopuhe@ruopuhe:~$ █
```

FileIO test:

QEMU:

Test 1: Random read and write

sysbench --threads=8 --test=fileio --file-total-size=1GB prepare

sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndrw --time=30 --max-requests=0 run

sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup

ruopuhe — qemu-system-aarch64 -accel hvf -cpu cortex-a57 -M virt,hig...

```
ruopuhe@ruopuhe:~$ sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndrw --time=30 --max-requests=0 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.18 (using system LuaJIT 2.1.0-beta3)
```

Running the test with following options:
Number of threads: 8
Initializing random number generator from current time

Extra file open flags: (none)
128 files, 8MiB each
1GiB total file size
Block size 16KiB
Number of IO requests: 0
Read/Write ratio for combined random IO test: 1.50
Periodic FSYNC enabled, calling fsync() each 100 requests.
Calling fsync() at the end of test, Enabled.
Using synchronous I/O mode
Doing random r/w test

File operations:	
reads/s:	19017.21
writes/s:	12678.18
fsyncs/s:	40604.09

Throughput:	
read, MiB/s:	297.14
written, MiB/s:	198.10

General statistics:	
total time:	30.0103s
total number of events:	2168739

Latency (ms):	
min:	0.00
avg:	0.11
max:	62.40
95th percentile:	0.35
sum:	238948.07

Threads fairness:	
events (avg/stddev):	271092.3750/1313.13
execution time (avg/stddev):	29.8685/0.00

Test 2: Sequential write

```
sysbench --threads=8 --test=fileio --file-total-size=1GB prepare
sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=seqwr --time=30 --max-requests=0 run
sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup
```

```
[ruopuhe@ruopuhe:~$ sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=seqwr --time=30 --max-requests=0 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.18 (using system LuaJIT 2.1.0-beta3)
```

```
Running the test with following options:
Number of threads: 8
Initializing random number generator from current time
```

```
Extra file open flags: (none)
128 files, 8MiB each
1GiB total file size
Block size 16KiB
Periodic FSYNC enabled, calling fsync() each 100 requests.
Calling fsync() at the end of test, Enabled.
Using synchronous I/O mode
Doing sequential write (creation) test
Initializing worker threads...
```

```
Threads started!
```

File operations:

reads/s:	0.00
writes/s:	41191.43
fsyncs/s:	52755.78

Throughput:

read, MiB/s:	0.00
written, MiB/s:	643.62

General statistics:

total time:	30.0105s
total number of events:	2818435

Latency (ms):

min:	0.00
avg:	0.08
max:	195.72
95th percentile:	0.32
sum:	237571.97

Threads fairness:

events (avg/stddev):	352304.3750/1832.16
execution time (avg/stddev):	29.6965/0.01

Test 3: Random write

```
sysbench --threads=8 --test=fileio --file-total-size=1GB prepare
sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndwr --time=30 --max-requests=0 run
sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup
```

```
[ruopuhe@ruopuhe:~$ sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndwr --time=30 --max-requests=0 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.18 (using system LuaJIT 2.1.0-beta3)
```

Running the test with following options:
Number of threads: 8
Initializing random number generator from current time

Extra file open flags: (none)
128 files, 8MiB each
1GiB total file size
Block size 16KiB
Number of IO requests: 0
Read/Write ratio for combined random IO test: 1.50
Periodic FSYNC enabled, calling fsync() each 100 requests.
Calling fsync() at the end of test, Enabled.
Using synchronous I/O mode
Doing random write test
Initializing worker threads...

Threads started!

File operations:

reads/s:	0.00
writes/s:	22689.64
fsyncs/s:	29072.96

Throughput:

read, MiB/s:	0.00
written, MiB/s:	354.53

General statistics:

total time:	30.0132s
total number of events:	1552563

Latency (ms):

min:	0.00
avg:	0.15
max:	190.13
95th percentile:	0.46
sum:	239390.46

Threads fairness:

events (avg/stddev):	194070.3750/1529.31
execution time (avg/stddev):	29.9238/0.00

Docker:

Run sysbench with this command: `docker run --rm -it --entrypoint /bin/sh my_sysbench`

Test 1: Random read and write

```
sysbench --threads=8 --test=fileio --file-total-size=1GB prepare
sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndrw --time=30 --max-requests=0 run
sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup
```

```
ruopuhe — com.docker.cli ◀ docker run --rm -it --entrypoint /bin/sh my_s...

/ # sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndrw --time=30 --max-requests=0 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.20-f6f6117dc4 (using bundled LuaJIT 2.1.0-beta2)

Running the test with following options:
Number of threads: 8
Initializing random number generator from current time

Extra file open flags: (none)
128 files, 8MiB each
1GiB total file size
Block size 16KiB
Number of IO requests: 0
Read/Write ratio for combined random IO test: 1.50
Periodic FSYNC enabled, calling fsync() each 100 requests.
Calling fsync() at the end of test, Enabled.
Using synchronous I/O mode
Doing random r/w test
Initializing worker threads...

Threads started!
```

```
ruopuhe — com.docker.cli ◀ docker run --rm -it --entrypoint /bin/sh my_s...

File operations:
  reads/s:                12963.44
  writes/s:               8642.29
  fsyncs/s:              27685.71

Throughput:
  read, MiB/s:            202.55
  written, MiB/s:         135.04

General statistics:
  total time:              30.0285s
  total number of events:  1479152

Latency (ms):
  min:                     0.00
  avg:                     0.16
  max:                     17.34
  95th percentile:        0.48
  sum:                     239565.16

Threads fairness:
  events (avg/stddev):     184894.0000/1123.18
  execution time (avg/stddev): 29.9456/0.00
```

Test 2: Sequential write

```
sysbench --threads=8 --test=fileio --file-total-size=1GB prepare
sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=seqwr --time=30 --max-requests=0 run
sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup
```

```
ruopuhe — com.docker.cli < docker run --rm -it --entrypoint /bin/sh my_s...

/ # sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=seqwr --time=30 --max-requests=0 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.20-f6f6117dc4 (using bundled LuaJIT 2.1.0-beta2)

Running the test with following options:
Number of threads: 8
Initializing random number generator from current time

Extra file open flags: (none)
128 files, 8MiB each
1GiB total file size
Block size 16KiB
Periodic FSYNC enabled, calling fsync() each 100 requests.
Calling fsync() at the end of test, Enabled.
Using synchronous I/O mode
Doing sequential write (creation) test
Initializing worker threads...

Threads started!

File operations:
  reads/s:                0.00
  writes/s:               21546.07
  fsyncs/s:               27611.14

Throughput:
  read, MiB/s:            0.00
  written, MiB/s:         336.66

General statistics:
  total time:              30.0328s
  total number of events:  1475330

Latency (ms):
  min:                     0.00
  avg:                     0.16
  max:                     525.97
  95th percentile:        0.44
  sum:                     239606.48

Threads fairness:
  events (avg/stddev):     184416.2500/1100.38
  execution time (avg/stddev): 29.9508/0.00
```

Test 3: Random write

```
sysbench --threads=8 --test=fileio --file-total-size=1GB prepare
sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndwr --time=30 --max-requests=0 run
sysbench --threads=8 --test=fileio --file-total-size=1GB cleanup
```

```
ruopuhe — com.docker.cli ◀ docker run --rm -it --entrypoint /bin/sh my_s...

/ # sysbench --threads=8 --test=fileio --file-total-size=1GB --file-test-mode=rndrw --time=30 --max-requests=0 run
WARNING: the --test option is deprecated. You can pass a script name or path on the command line without any options.
sysbench 1.0.20-f6f6117dc4 (using bundled LuaJIT 2.1.0-beta2)

Running the test with following options:
Number of threads: 8
Initializing random number generator from current time

Extra file open flags: (none)
128 files, 8MiB each
1GiB total file size
Block size 16KiB
Number of IO requests: 0
Read/Write ratio for combined random IO test: 1.50
Periodic FSYNC enabled, calling fsync() each 100 requests.
Calling fsync() at the end of test, Enabled.
Using synchronous I/O mode
Doing random write test
Initializing worker threads...

Threads started!

ruopuhe — com.docker.cli ◀ docker run --rm -it --entrypoint /bin/sh my_s...

File operations:
  reads/s:                0.00
  writes/s:               15525.66
  fsyncs/s:               19903.08

Throughput:
  read, MiB/s:            0.00
  written, MiB/s:         242.59

General statistics:
  total time:              30.0333s
  total number of events:  1063048


Latency (ms):
  min:                     0.00
  avg:                     0.23
  max:                     17.58
  95th percentile:        0.61
  sum:                     239669.87

Threads fairness:
  events (avg/stddev):     132881.0000/509.37
  execution time (avg/stddev): 29.9587/0.00
```


CPU utilization for user-level and kernel -level:

QEMU:

Screen snapshot of activity monitor while QEMU is idle:

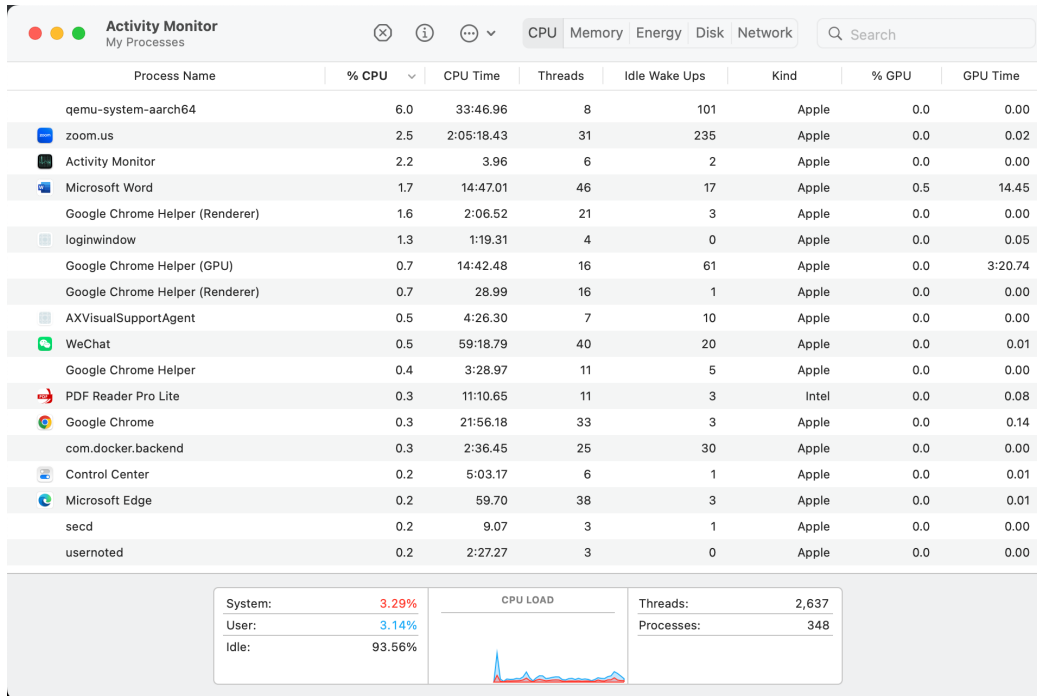


Screen snapshot of activity monitor while sysbench run fileio test on QEMU:

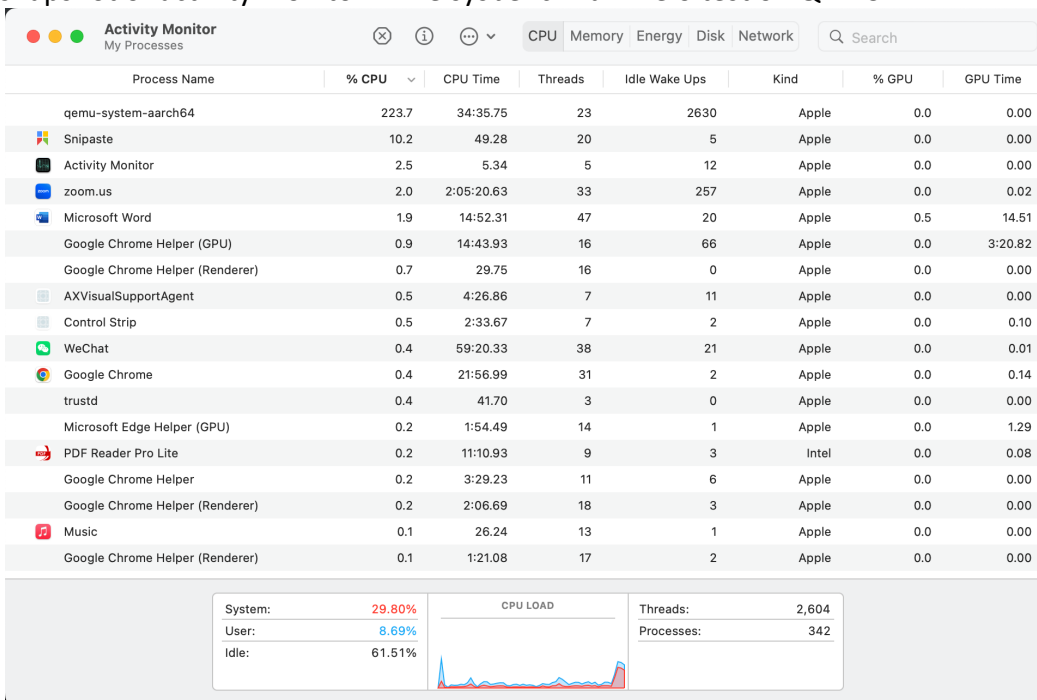


From the above snapshots, we can see the CPU usage increases from 6% to 223.7%

Docker:

The Screenshot of activity monitor while docker is idle:

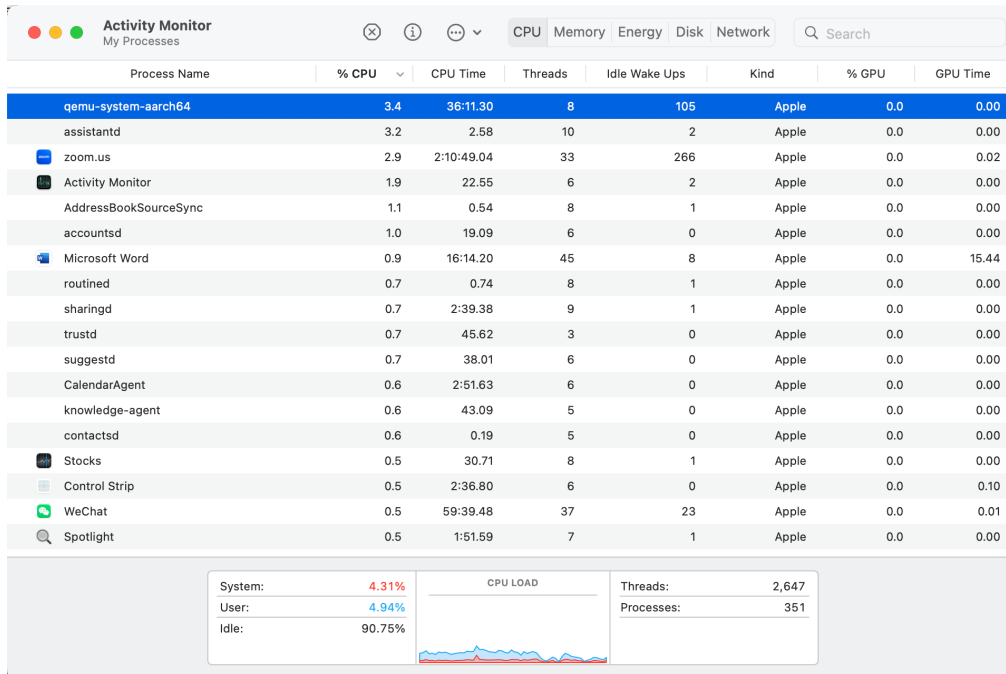

The Screenshot when sysbench run fileio test on docker:

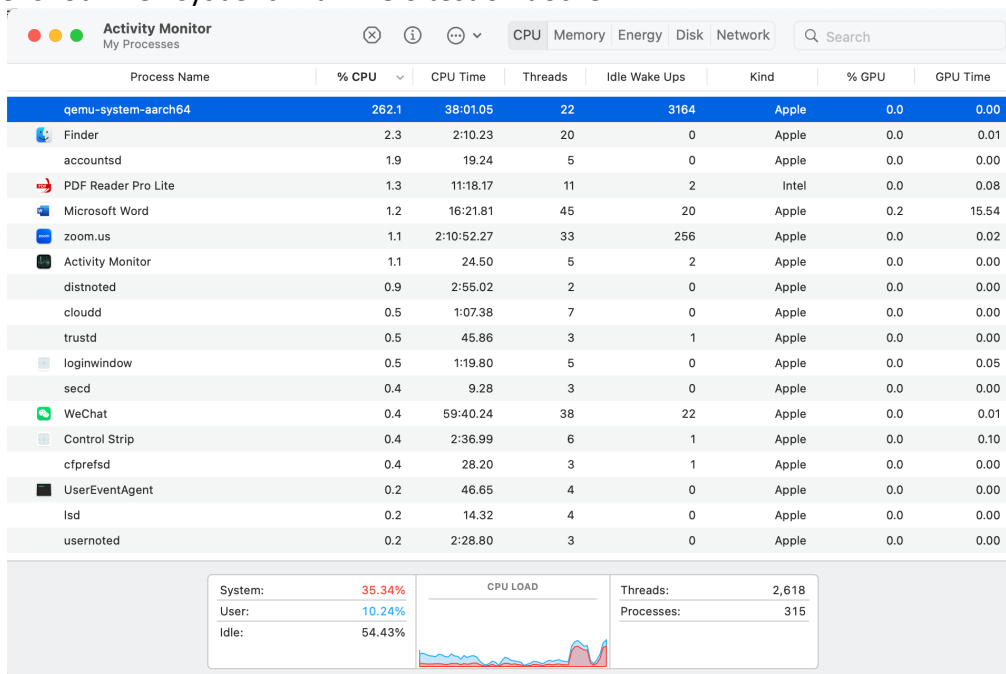

	Sysbench not running	Sysbench running
User level CPU	3.29%	29.80%
Kernel level CPU	4.31%	35.34%

Presentation and analysis of the performance data:

Manually drop cache in the Host using this command:

`sync && sudo purge`

CPU test for Docker:

Test 1: --cpu-max-prime=100000

	avg	min	max	Events per sec
1	2.15	2.12	11.12	465.35
2	2.16	2.12	12.69	461.79
3	2.16	2.13	13.48	463.66
4	2.15	2.12	14.63	464.28
5	2.14	2.12	14.71	466.10

Test 2: --cpu-max-prime=300000

	avg	min	max	Events per sec
1	9.02	8.89	36.11	110.83
2	9.00	8.89	29.97	111.05
3	9.00	8.89	31.44	111.00
4	8.98	8.89	34.06	111.27
5	9.00	8.89	29.99	111.12

Test 3: --cpu-max-prime=500000

	avg	min	max	Events per sec
1	17.56	17.23	46.23	56.70
2	17.72	17.52	50.66	56.42
3	17.81	17.55	49.73	56.14
4	17.72	17.52	33.87	56.42
5	17.74	17.52	51.47	56.34

CPU test for QEMU:

Test 1: --cpu-max-prime=100000

	avg	min	max	Events per sec
1	1.94	1.91	3.79	514.46
2	1.93	1.91	5.26	518.17
3	1.94	1.91	4.81	515.91
4	1.94	1.91	5.23	516.01
5	1.94	1.91	5.50	514.53

Test 2: --cpu-max-prime=300000

	avg	min	max	Events per sec
1	8.41	8.32	15.13	118.81
2	8.40	8.32	15.50	118.99
3	8.41	8.32	16.12	118.86
4	8.38	8.32	16.10	119.27
5	8.37	8.32	16.12	119.45

Test 3: --cpu-max-prime=500000

	avg	min	max	Events per sec
1	16.74	16.61	29.98	59.64
2	16.79	16.61	31.81	59.54
3	16.82	16.61	27.07	59.42
4	16.76	16.61	31.71	59.66
5	16.78	16.61	30.86	59.56

FileIO test for Docker:

Test 1: Random read and write

	avg	min	max	read	write
1	0.16	0.00	17.34	202.55	135.04
2	0.17	0.00	13.50	197.34	131.56
3	0.16	0.00	31.90	199.54	133.03
4	0.17	0.00	34.63	193.76	129.17
5	0.16	0.00	25.10	203.90	135.93

Test 2: Sequential write

	avg	min	max	read	write
1	0.16	0.00	525.97	0.00	336.66
2	0.16	0.00	16.27	0.00	325.03
3	0.17	0.00	27.46	0.00	331.28
4	0.16	0.00	27.79	0.00	333.19
5	0.17	0.00	26.93	0.00	327.92

Test 3: Random write

	avg	min	max	read	write
1	0.23	0.00	17.58	0.00	242.59
2	0.23	0.00	19.02	0.00	234.88
3	0.23	0.00	33.89	0.00	235.55
4	0.23	0.00	18.54	0.00	237.11
5	0.22	0.00	25.53	0.00	253.08

FileIO test for QEMU:

Test 1: Random read and write

	avg	min	max	read	write
1	0.11	0.00	62.40	297.14	198.10
2	0.11	0.00	22.39	293.61	195.74
3	0.09	0.00	16.62	347.45	231.63
4	0.10	0.00	15.28	342.27	228.18
5	0.09	0.00	19.69	355.79	237.19

Test 2: Sequential write

	avg	min	max	read	write
1	0.08	0.00	195.72	0.00	643.62
2	0.08	0.00	24.63	0.00	687.59
3	0.08	0.00	17.88	0.00	686.43
4	0.08	0.00	811.77	0.00	643.26
5	0.08	0.00	18.95	0.00	661.17

Test 3: Random write

	avg	min	max	read	write
1	0.15	0.00	190.13	0.00	354.53
2	0.14	0.00	24.97	0.00	386.13
3	0.15	0.00	33.91	0.00	373.25
4	0.14	0.00	9.74	0.00	381.98
5	0.15	0.00	27.97	0.00	373.70

Observation and Analysis of the performance data:

From the above result data, we can see that QEMU has a better performance rather than docker in CPU tests and FileIO test. The number of events per second for Docker(OS Virtualization) is lower than QEMU(System Virtualization) in CPU tests. And Docker also has the lower throughput of reading and writing and the higher latency than QEMU in FileIO test. This is pretty unusual because Docker which is OS Virtualization should perform better than QEMU, which is System Virtualization.

I think this is because native Docker is not available in my Apple Silicon laptop, I have to use Docker desktop instead of native Docker. Docker Desktop may add another layer which cause the low performance in my laptop.

Git Repository:

URL: https://github.com/kinghe233/Ruopuhe_COEN241.git