VHF / UHF Handheld — Channel & Net Reference

RX 108–136 (AM air) · 136–174 · 350–390 · 400–520 MHz TX 136–174 · 400–480 MHz (FM, 5 W)

Indianapolis Metro

GMRS ch → GMRS licence · Ham 2m/70cm → Technician · MURS/FRS licence-free

WEEKLY NET SCHEDULE (times Eastern; * = unverified, confirm on air)

Day	Time	Net	Ch#	Freq	Tone / Access
Sun	7:00p	Johnson ARES/Mid-State ARC	335	146.835	PL151.4
Sun	7:00p	Michigantown 625 [GMRS]	126	462.625	PL131.8
Sun	7:30p	Marion Co ARES	343	146.700	PL88.5
Sun	8:00p	Hamilton Co ARES / CIARA	350	145.170	PL77.0
Sun	9:00p	Anderson WA9EOC net *	615	444.675	CSQ
Mon	7:00p	Central Indiana GMRS Net [GMRS]	120	462.575	**Courtesy req.**
Mon	7:15p	Marion Co CERT Net	623	443.250	PL100.0
Mon	7:30p	Blue River Valley ARC/ARES	358	145.480	PL88.5
Mon	7:30p	Emergency Simplex Test ch19 [GMRS]	128	462.650	simplex
Mon	7:30p	Fusion Tech MinWis [DIGITAL]	620	WIRES-X	C4FM
Mon	8:00p	Tipton County Net (K9TRC)	637	443.125	PL131.8
Mon	8:00p	Crossroads DMR [DIGITAL]	-	TG 31189	DMR
Mon	9:00p	Mesh Monday (DRP) [ZELLO]	-	Zello app	mesh net
Mon	11:00p	The Papa Chat [DIGITAL]	-	TG 31077	DMR
Tue	7:30p	Hancock County (W9ATG)	617	444.450	DCS465
Tue	7:30p	Hendricks County ARES	334	145.130	PL88.5
Tue	8:00p	Absolute Tech Net (natl) *	356	146.745	D346
Tue	8:00p	Mid-State WIRES-X [DIGITAL]	619	443.525	C4FM
Tue	8:00p	Hoosier DMR Net [DIGITAL]	-	441.200	TG 3118
Tue	9:00p	INDY 600 net [GMRS]	122	462.600	**$25/yr if regular**
Wed	7:00p	Newsline bulletin (W9IRA)	343	146.700	PL88.5
Wed	7:30p	Marion County ARES	343	146.700	PL88.5
Wed	8:00p	Welcome Net (W9ICE)	346	146.970	PL107.2
Wed	8:00p	Madison Co ARC (W9VCF)	329	145.390	PL151.4
Thu	6:30p	EchoLink Youth Net	356	146.745	D346
Thu	7:00p	SATERN (Salvation Army)	345	146.880	PL88.5
Thu	8:00p	Indiana Statewide / AUXCOMM	339	147.210	PL88.5
Thu	8:00p	IN Statewide D-STAR [DIGITAL]	-	REF024 B	D-STAR
Thu	8:00p	Who Knows What Net (K9EOC)	620	443.950	PL77.0
Sat	8:00p	Doomsday Preppers Net [ZELLO]	-	Zello app	internet PTT

MONTHLY · HF / STATEWIDE ([HF] = beyond this handheld — needs HF rig or SDR)

1st Fri	10:50a	Marion Co Siren Check	343	146.700	PL88.5
1st/3rd Sun	8:00p	WC9IN Sunday Night Net (linked) *	356	146.745	D346
1st/3rd Thu	7:30p	AUXCOMM HF pre-net [HF]	-	7.250 / 3.844	SSB
Daily	—	Indiana Traffic Net [HF]	-	3.910	SSB
Daily	—	Indiana Section CW Net (QIN) [HF]	-	3.535	CW
Sun	5:00p	IN Section ARES HF Net [HF]	-	3.900 / 7.280	SSB
Sat	9:00p	WVARA HF Ragchew [HF]	-	3.679	LSB

ANTENNA CUT LENGTHS (in.)

Band	MHz	1/4-wave	1/2-wave
10 m ham	28.4	98.9"	197.7"
6 m ham	52.5	53.5"	107.0"
Airband RX	121.5	23.1"	46.2"
2 m ham	146.0	19.2"	38.5"
MURS	151.9	18.5"	37.0"
Marine/NOAA	159.5	17.6"	35.2"
1.25 m ham	223.5	12.6"	25.1"
70 cm ham	440.0	6.4"	12.8"
GMRS / FRS	462.6	6.1"	12.1"
LoRa mesh	915.0	3.1"	6.1"

1/4-wave in. = 2808 / MHz (0.95 vel. factor)

RADIO SETTINGS (known-good)

Squelch	2
Timeout timer	120 s
Roger beep	**OFF**
DTMF / ANI ID	**OFF**
Key beep	OFF
Side tone	OFF
VOX	OFF
Tail Clear (STE)	ON
Scan mode	Carrier
Work mode	Channel
Save mode	ON
Dual watch	your pref

Roger + ANI OFF — required on some repeaters.

POWER · OFFSETS · CALLING

GMRS TX POWER LIMITS

ch 1–7 462.5625–462.7125 5 W
ch 8–14 467 MHz (FRS only) 0.5 W
ch 15–22 462.550–462.725 50 W
MURS 151 / 154 MHz 2 W

REPEATER OFFSETS

2 m ± 0.600 70 cm + 5.000
GMRS ch15–22 + 5.000 (in 467.x)

CALLING / EMERGENCY

2 m simplex call 146.520
70 cm simplex call 446.000
GMRS travel/emerg. 462.675 PL141.3
Marine distress ch16 156.800
Aircraft emergency 121.500

NATO PHONETIC ALPHABET — for net check-ins

A Alfa **B** Bravo **C** Charlie **D** Delta **E** Echo **F** Foxtrot **G** Golf **H** Hotel **I** India **J** Juliett **K** Kilo **L** Lima **M** Mike
N November **O** Oscar **P** Papa **Q** Quebec **R** Romeo **S** Sierra **T** Tango **U** Uniform **V** Victor **W** Whiskey **X** X-ray **Y** Yankee **Z** Zulu

HOW TO CHECK INTO A NET

1. Listen first — wait for net control to call for check-ins.
2. Key up, pause 1/2 second (let the repeater open), then talk.
3. Give: call sign (phonetically) · first name · city.
4. Add "no traffic" — or briefly state what you have.
5. UNKEY, then listen — net control will acknowledge you.

REPEATER ETIQUETTE & TROUBLESHOOTING

- Pause after keying — repeaters take ~1/2 s to come up.
- Leave 2 s between overs so others can break in.
- ID with your call sign every 10 min and at sign-off.
- Can't hear it? Out of range, or it needs a receive tone.

SKYWARN — severe weather nets

NBL145	350	145.170	Hamilton Co (home)	PL77.0
NBL355	633	443.550	Hamilton Co UHF	PL77.0
IND970	346	146.970	Central IN — primary	PL107.2
IND265	621	442.650	Central IN UHF	PL77.0
IND760	344	146.760	Marion Co — primary	PL151.4
IND325	623	443.250	Marion Co — backup	PL100.0

SKYWARN — WHAT TO REPORT

- Tornado, funnel cloud, or wall cloud
- Hail 1 inch (quarter) or larger
- Wind 58 mph+, or any wind damage
- Flash flooding / water over a roadway

Report: what · where (town + county) · when · your call sign
Listen first — never break into an active report.

LINKED — EchoLink / IRLP / AllStar

NBL355	633	443.550	Noblesville K9EOC	IRLP · 77.0
IND970	346	146.970	Indianapolis W9ICE	IRLP · 107.2
IND131	340	147.315	Indianapolis K9DC	IRLP · 94.8
IND342	625	443.425	Indianapolis K9IP	IRLP · D043
IND880	345	146.880	Indianapolis W9RCA	EchoLink · 88.5
IND121	339	147.210	Indianapolis W9FBZ	EchoLink · 88.5
IND332	624	443.325	Indianapolis W9EIB	EchoLink · 156.7
AND775	330	146.775	Anderson W2NAP	AllStar+Echo · 88.5
AND422	613	442.275	Anderson W2NAP	AllStar · 151.4
NCS739	353	147.390	New Castle W9OB	AllStar · 127.3
IND745	356	146.745	Indianapolis W9AMT	AllStar 662640 · D346


Courtesy: register w/ DREGs on myGMRS · INDY 600 asks $25/yr donation for regular use.
Listening is always legal. Ham = RX-only until Technician.
NOAA weather: hold 0 . Scan=Manual → skipped, still selectable.

US BAND PLAN — quick ranges (MHz)

HAM 160m 1.8–2 · 80m 3.5–4 · 40m 7–7.3 · 20m 14–14.35 · 15m 21–21.45
10m 28–29.7 · 6m 50–54 · 2m 144–148 · 1.25m 222–225 · 70cm 420–450
Tech HF: all of 10m voice 28.3–28.5 + CW slices on 80/40/15
OTHER Air 108–137 AM · MURS 151.8/154.6 · Marine 156–157 · WX 162.4–.55

MESHCORE — off-grid text mesh (LoRa 902–928 · licence-free)

Indiana preset: 910.525 · BW 62.5 · SF 7 · CR 5 · Hash 2B · TX 22 dBm
Flash at flasher.meshcore.io — Companion = handheld · Repeater = fixed node
#public · #okimesh · #info · #test · #emergency · #skywarn · #hamradio
#weather · #meshcore · #porchlight — send !echo in #test to check reach
CIMN cimesh.net (FREE rptr hardware, prime sites) · okimesh.org · map.okimesh.org

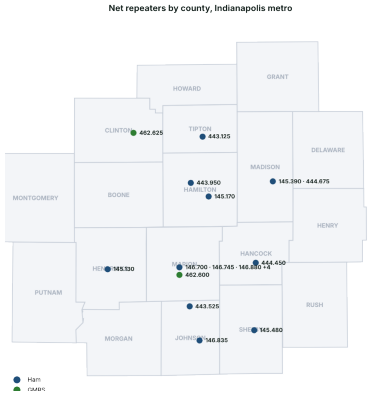

#MeshNet — Sun & Thu 7:00p · MeshCore + Meshtastic, #MeshNet channel · 10 min
A stress test of the mesh. Check in with: closest airport code · device model · months on mesh
Postponed if weather or another emergency is on the air; emergency traffic comes first.

VHF / UHF Handheld — Channel & Net Reference

RX 108–136 (AM air) · 136–174 · 350–390 · 400–520 MHz TX 136–174 · 400–480 MHz (FM, 5 W)

● **BOLD / shaded = high-activity: net repeaters · SKYWARN · linked (EchoLink/IRLP/AllStar) · open GMRS repeaters · calling & emergency channels**

NOAA Weather				
●	001	**WXINDY**	**162.5500**	NOAA Wx - 162.550 is Indianapolis p…
Weather / Data Satellites				
	002	**ORBCM1**	137.2500	ORBCOMM satellite data bursts
	003	**ORBCM2**	137.7400	ORBCOMM satellite data bursts
	004	**WXSAT1**	137.1000	NOAA-19 APT - SDR to decode, hear w…
	005	**WXSAT2**	137.6200	NOAA-15 APT
	006	**WXSAT3**	137.9125	NOAA-18 APT
	007	**WXSAT4**	137.9000	Meteor-M LRPT wx-sat
Satellites (Voice / ISS)				
	012	**ISS**	145.8000	ISS voice downlink when crew active
	013	**ISSAPRS**	145.8250	ISS/sat APRS digipeater data
	014	**ISSRPTR**	437.8000	ISS crossband FM voice repeater dow…
	015	**PO101**	145.9000	PO-101 Diwata-2 FM (scheduled passe…
	016	**SO50**	436.7950	SO-50 FM satellite downlink
	017	**TEVEL**	436.4000	TEVEL FM repeater cubesats (~436.4)
MURS				
	020	**MURS1**	151.8200	MURS license-free
	021	**MURS2**	151.8800	MURS license-free
	022	**MURS3**	151.9400	MURS license-free
	023	**MURS4**	154.5700	MURS license-free
	024	**MURS5**	154.6000	MURS license-free
Marine				
	030	**MAR09**	156.4500	Marine Ch09 hailing/recreational
	031	**MAR13**	156.6500	Marine Ch13 bridge/navigation
●	032	**MAR16**	**156.8000**	Marine Ch16 distress/calling
	033	**MAR22A**	157.1000	Marine Ch22A USCG liaison
	034	**MAR68**	156.4250	Marine Ch68 recreational
	035	**MAR69**	156.4750	Marine Ch69 recreational
	036	**MAR71**	156.5750	Marine Ch71 recreational
	037	**MAR72**	156.6250	Marine Ch72 recreational
	038	**MAR78**	156.9250	Marine Ch78 recreational
Railroad				
	040	**CSXdsp**	160.3200	CSX dispatcher Big Four Yard
	041	**CSXrd**	160.2300	CSX road - Avon/St Louis Line
	042	**EOT1**	452.9375	Railroad EOT/DPU telemetry (data bu…
	043	**EOT2**	457.9375	Railroad EOT/HTU telemetry (data bu…
	044	**INRDrd**	160.7700	Indiana Rail Road road 44-44
	045	**INRDyd**	161.4300	Indiana Rail Road yard 88-88
	046	**NS2**	160.9500	Norfolk Southern road AAR42
	047	**NS3**	161.1900	Norfolk Southern road AAR58
	048	**NS4**	161.2500	Norfolk Southern road AAR62
	049	**NSrd**	160.8000	Norfolk Southern road AAR46
Interop / EMS / Fire				
●	028	**FEDNC1**	**169.5375**	Federal interop NC-1/IR-5 calling -…
	029	**FEDLE**	167.2500	Federal LE interop LE-2/LE-6 (NIFOG)
	050	**SAR160**	155.1600	National Search & Rescue
	051	**UCALL40**	453.2125	UHF national interop calling UCALL40
	052	**UTAC41**	453.4625	UHF national interop tactical UTAC41
	053	**UTAC42**	453.7125	UHF national interop tactical UTAC42
	054	**UTAC43**	453.8625	UHF national interop tactical UTAC43
	055	**VCALL10**	155.7525	National interop calling VCALL10
	056	**VFIR21**	154.2800	Fire mutual aid VFIRE21
	057	**VFIR22**	154.2650	Fire mutual aid VFIRE22
	058	**VFIR23**	154.2950	Fire mutual aid VFIRE23
	059	**VLAW31**	155.4750	Law enforcement interop calling
	060	**VMED28**	155.3400	EMS/hospital national HEAR
	061	**VTAC11**	151.1375	National interop VTAC11 (TX PL156.7)
	062	**VTAC12**	154.4525	National interop VTAC12
	063	**VTAC13**	158.7375	National interop VTAC13
	064	**VTAC14**	159.4725	National interop VTAC14
	065	**VTAC17**	161.8500	National interop VTAC17
	066	**VFIR24**	154.2725	Fire mutual aid VFIRE24 (NIFOG)
	067	**VFIR25**	154.2875	Fire mutual aid VFIRE25 (NIFOG)
	068	**VFIR26**	154.3025	Fire mutual aid VFIRE26 (NIFOG)
	069	**VMED29**	155.3475	EMS interop VMED29 secondary (NIFOG)
	078	**VLAW32**	155.4825	Law enforcement interop VLAW32 seco…
	098	**SAR123**	123.1000	Aeronautical SAR on-scene 123.1 AM …
UHF Hospital (MED)				
	070	**MED1**	463.0000	UHF EMS/hospital MED-1
	071	**MED2**	463.0250	UHF EMS/hospital MED-2
	072	**MED3**	463.0500	UHF EMS/hospital MED-3
	073	**MED4**	463.0750	UHF EMS/hospital MED-4
	074	**MED5**	463.1000	UHF EMS/hospital MED-5
	075	**MED6**	463.1250	UHF EMS/hospital MED-6
	076	**MED7**	463.1500	UHF EMS/hospital MED-7
	077	**MED8**	463.1750	UHF EMS/hospital MED-8
Aircraft				
	080	**AIRAIR**	122.7500	Air-to-air
	081	**CAP**	148.1500	Civil Air Patrol
●	082	**GUARD**	**121.5000**	Aircraft emergency / guard
	083	**INDapp**	127.1500	Indianapolis Approach (east)
	084	**KEYEct**	122.8000	Eagle Creek CTAF/UNICOM
	085	**KINDap**	128.7500	Indianapolis Intl Approach
	086	**KINDat**	134.2500	Indianapolis Intl ATIS
	087	**KINDdp**	119.0500	Indianapolis Intl Departure
	088	**KINDgd**	121.8000	Indianapolis Intl Ground
	089	**KINDtw**	120.9000	Indianapolis Intl Tower
	090	**KMQJcl**	119.2500	Mt Comfort Clearance
	091	**KMQJct**	122.7000	Mt Comfort CTAF
	092	**KMQJwx**	124.1750	Mt Comfort AWOS
	093	**KUMPcl**	121.6250	Indy Metro Clearance
	094	**KUMPct**	123.0000	Indy Metro/Fishers CTAF
	095	**KUMPwx**	119.3750	Indy Metro/Fishers AWOS
	096	**MULTI**	122.9000	Multicom (uncontrolled fields)
	097	**UNICOM**	122.9500	UNICOM (towered GA)
FRS / GMRS				
	100	**G01-562**	462.5625	FRS/GMRS ch1 - HCEM community emerg..
	101	**G02-587**	462.5875	FRS/GMRS ch2
	102	**G03-612**	462.6125	FRS/GMRS ch3
	103	**G04-637**	462.6375	FRS/GMRS ch4
	104	**G05-662**	462.6625	FRS/GMRS ch5
	105	**G06-687**	462.6875	FRS/GMRS ch6
	106	**G07-712**	462.7125	FRS/GMRS ch7
	107	**F08-562**	467.5625	FRS/GMRS ch8
	108	**F09-587**	467.5875	FRS/GMRS ch9
	109	**F10-612**	467.6125	FRS/GMRS ch10
	110	**F11-637**	467.6375	FRS/GMRS ch11
	111	**F12-662**	467.6625	FRS/GMRS ch12
	112	**F13-687**	467.6875	FRS/GMRS ch13
	113	**F14-712**	467.7125	FRS/GMRS ch14
	114	**G15-550**	462.5500	FRS/GMRS ch15 (GMRS repeater output)
●	115	**ICE550**	**462.5500**	77.0 ICE 550 GMRS rptr WQPV948 (Indianap…
	116	**I15-550**	467.5500	GMRS repeater INPUT for ch15 - list…
	117	**G16-575**	462.5750	FRS/GMRS ch16 (GMRS repeater output)
	118	**BURL575**	462.5750	131.8 Burlington GMRS rptr WQSK928 (Carro…
	119	**ELWD575**	462.5750	136.5 Elwood GMRS rptr WROI852 (Madison) …
●	120	**DREG575**	**462.5750**	D043 DREGs 575 (Mighty 575) GMRS rptr ch…
	121	**I16-575**	467.5750	GMRS repeater INPUT for ch16 - list…
●	122	**G17-600**	**462.6000**	FRS/GMRS ch17 (GMRS repeater output)
	123	**I17-600**	467.6000	GMRS repeater INPUT for ch17 - list…
	124	**G18-625**	462.6250	FRS/GMRS ch18 (GMRS repeater output)
	125	**ALEX625**	462.6250	123.0 Alexandria GMRS rptr WRKY635 (Madis…
●	126	**MTWN625**	**462.6250**	131.8 Michigantown 625 GMRS rptr WROU622 …
	127	**I18-625**	467.6250	GMRS repeater INPUT for ch18 - list…
●	128	**G19-650**	**462.6500**	FRS/GMRS ch19 (GMRS repeater output)
●	129	**MOS650**	**462.6500**	141.3 Moses GMRS rptr WSFW943 (Lizton, He…
	130	**WLF650**	462.6500	D664 TRAVEL - West Lafayette 650 GMRS rp…
●	131	**CAL-650**	**462.6500**	141.3 GMRS ch19 road-travel simplex - 141…
	132	**I19-650**	467.6500	GMRS repeater INPUT for ch19 - list…
	133	**G20-675**	462.6750	FRS/GMRS ch20 (GMRS repeater output)
●	134	**ANDR675**	**462.6750**	167.9 Anderson GMRS rptr WSFQ575 MCEMA (M…
●	135	**AVON675**	**462.6750**	136.5 Avon GMRS rptr WSHP321 (Hendricks) …
	136	**FLSH675**	462.6750	PLACEHOLDER Flashes 675 GMRS rptr (…
	137	**I20-675**	467.6750	GMRS repeater INPUT for ch20 - list…
	138	**G21-700**	462.7000	FRS/GMRS ch21 (GMRS repeater output)
	139	**RUSS700**	462.7000	131.8 Russiaville GMRS rptr WQSK928 (Howa…
	140	**BRWN700**	462.7000	D411 TRAVEL - Brown County 700 GMRS rptr…
	141	**BBG700**	462.7000	PLACEHOLDER 502 Repeater GMRS rptr …
	142	**AVN700**	462.7000	PLACEHOLDER Old School Indy GMRS rp…
	143	**HEN700**	462.7000	151.4 Hendricks County GMRS rptr ch21 - A…
	144	**I21-700**	467.7000	GMRS repeater INPUT for ch21 - list…
	145	**G22-725**	462.7250	FRS/GMRS ch22 (GMRS repeater output)
●	146	**SHAK725**	**462.7250**	118.8 Shackleford725 K931 GMRS rptr (NE I…
	147	**I22-725**	467.7250	GMRS repeater INPUT for ch22 - list…
●	148	**CAL-675**	**462.6750**	141.3 GMRS ch20 road-travel/emergency cal…
●	999	**LNGHAUL**	**462.6750**	141.3 Project LongHaul calling - 462.675 …
Business / Itinerant				
	200	**BIZ01**	151.6250	Itinerant red dot - retail/business
	201	**BIZ02**	151.7000	Business itinerant
	202	**BIZ03**	151.7600	Business itinerant
	203	**BIZ04**	151.9550	Itinerant purple dot / also Noblesv…
	204	**BIZ05**	158.4000	Itinerant white dot
	205	**BIZ06**	464.5000	Itinerant brown dot - stores
	206	**BIZ07**	464.5500	Itinerant yellow dot
	207	**BIZ08**	469.5000	Itinerant brown dot input
	208	**BIZ09**	469.5500	Itinerant yellow dot input
	209	**BIZ10**	467.8500	UHF itinerant
	210	**BIZ11**	467.8750	UHF itinerant

VHF / UHF Handheld — Channel & Net Reference

RX 108–136 (AM air) · 136–174 · 350–390 · 400–520 MHz TX 136–174 · 400–480 MHz (FM, 5 W)

● **BOLD / shaded = high-activity: net repeaters · SKYWARN · linked (EchoLink/IRLP/AllStar) · open GMRS repeaters · calling & emergency channels**

211	**BIZ12**	467.9000	—	UHF itinerant
212	**BIZ13**	467.9250	—	UHF itinerant
213	**BIZ14**	451.8000	—	UHF business
214	**BIZ15**	452.9000	—	UHF business
215	**BIZ16**	461.0000	—	UHF business
216	**BIZ17**	464.4750	—	UHF business
217	**BIZ18**	464.5250	—	UHF business
Venues / Events				
220	**VEN01**	151.5125	—	Venue/retail/event itinerant - scan…
221	**VEN02**	151.6325	—	Venue/retail/event itinerant - scan…
222	**VEN03**	154.5275	—	Venue/retail/event itinerant - scan…
223	**VEN04**	457.5375	—	Venue/retail/event itinerant - scan…
224	**VEN05**	457.5625	—	Venue/retail/event itinerant - scan…
225	**VEN06**	457.6125	—	Venue/retail/event itinerant - scan…
226	**VEN07**	461.0375	—	Venue/retail/event itinerant - scan…
227	**VEN08**	461.0625	—	Venue/retail/event itinerant - scan…
228	**VEN09**	467.7625	—	Venue/retail/event itinerant - scan…
229	**VEN10**	467.8125	—	Venue/retail/event itinerant - scan…
230	**VEN11**	469.2625	—	Venue/retail/event itinerant - scan…
Speedway (IMS)				
240	**IMS1**	454.0000	—	IMS race team UHF - scan during Spe…
241	**IMS2**	456.5000	—	IMS race team UHF - scan during Spe…
242	**IMS3**	458.0000	—	IMS race team UHF - scan during Spe…
243	**IMS4**	461.5000	—	IMS race team UHF - scan during Spe…
Public Svc / Schools				
245	**HSE461**	461.3250	—	HSE Schools ops 1 WPDU924 (Fishers)
246	**HSE462**	461.8500	—	HSE Schools ops 2 WPDU924 (Fishers)
247	**HSE463**	462.3250	—	HSE Schools ops 3 WPDU924 (Fishers)…
248	**HSEBUS**	463.3250	—	HSE School BUSES WPDU924 (Fishers) …
249	**HSE464**	463.4000	—	HSE Schools ops 4 WPDU924 (Fishers)…
250	**NOBBUS**	155.1750	—	Noblesville School buses WQDY357
251	**NOBSC1**	152.9450	—	Noblesville Schools ops WQHJ807
252	**NOBCRS**	154.5400	—	Noble Crossing Elementary WQHH509
253	**STNYCK**	152.3600	—	Stony Creek Elementary WQBJ508
254	**CARGOV**	453.2375	—	Carmel Government Services WPXH695
255	**CARPRK**	453.1500	—	Carmel Parks / Monon Center WQIA462
256	**CARUTA**	155.8650	—	Carmel Utility A KSZ831
257	**CARUTB**	453.7500	—	Carmel Utility B KNIM261
258	**CARUTC**	453.8750	—	Carmel Utility C WNIF564
259	**OLMC1**	457.4125	—	Our Lady Mt Carmel ops1 WQOX476 PL1…
260	**OLMC2**	457.8875	—	Our Lady Mt Carmel ops2 WQOX476 PL1…
261	**HHSCV**	151.7150	—	Hamilton Heights Schools VHF WPWF63…
262	**HHSCU**	462.2000	—	Hamilton Heights Schools UHF WPWF63…
263	**SIRHAM**	460.5250	—	Hamilton Co outdoor warning siren D…
264	**SIRCAR**	453.6000	—	Carmel weather siren DATA WPML424 (…
Ham 2 m				
300	**144200**	144.2000	—	2m SSB DX/weak-signal calling - SSB…
301	**145500**	145.5000	—	IARU R1 2m FM calling (internationa…
302	**146400**	146.4000	—	2m FM simplex
303	**146415**	146.4150	—	2m FM simplex
304	**146430**	146.4300	—	2m FM simplex
305	**146445**	146.4450	—	2m FM simplex
306	**146475**	146.4750	—	2m FM simplex
307	**146490**	146.4900	—	2m FM simplex
308	**146505**	146.5050	—	2m FM simplex
309	**146535**	146.5350	—	2m FM simplex
310	**146565**	146.5650	—	2m FM simplex
311	**147435**	147.4350	—	2m FM simplex
312	**147450**	147.4500	—	2m FM simplex
313	**147465**	147.4650	—	2m FM simplex
314	**147495**	147.4950	—	2m FM simplex
315	**147525**	147.5250	—	2m FM simplex
316	**147570**	147.5700	—	2m FM simplex
317	**147585**	147.5850	—	2m FM simplex
318	**2M-46**	146.4600	—	2m simplex
319	**2M-55**	146.5500	—	2m simplex
320	**2M-58**	146.5800	—	2m simplex
321	**2M-742**	147.4200	—	2m simplex
322	**2M-748**	147.4800	—	2m simplex
323	**2M-751**	147.5100	—	2m simplex
324	**2M-754**	147.5400	—	2m simplex
325	**2M-755**	147.5550	—	2m simplex
● 326	**2MCALL**	**146.5200**	—	2m national calling
327	**AND090**	147.0900	110.9	Anderson K9DYR IRLP (Madison) PL110…
328	**AND150**	147.1500	151.4	Anderson KD9SZA (Madison) PL151.4
● 329	**AND390**	**145.3900**	151.4	Anderson Hospital W9VCF (Madison) P…
● 330	**AND775**	**146.7750**	88.5	Anderson W2NAP AllStar/EchoLink (Ma…
331	**AND820**	146.8200	110.9	Anderson Madison Co Dispatch W9OBH …
332	**APRS**	144.3900	—	APRS data (national) - digital burs…
333	**BEL147**	147.0150	88.5	Belleville N9HC (Hendricks) PL88.5
● 334	**DAN145**	**145.1300**	88.5	Danville W9HCA (Hendricks) PL88.5
● 335	**FRA146**	**146.8350**	151.4	Franklin (Johnson Co) repeater - Su…
336	**GFD145**	145.3300	88.5	Greenfield W9ATG (Hancock) PL88.5
337	**HOR146**	146.8650	77.0	Hortonville K9EOC (Hamilton) PL77.0
338	**IND112**	147.1200	88.5	Indianapolis W9IRA PL88.5
● 339	**IND121**	**147.2100**	88.5	Indianapolis W9FBZ Echo PL88.5
● 340	**IND131**	**147.3150**	94.8	Indianapolis K9DC IRLP PL94.8
341	**IND625**	146.6250	88.5	Indianapolis W9IRA Fusion PL88.5
342	**IND670**	146.6700	88.5	Indianapolis K9IPL Fusion PL88.5
● 343	**IND700**	**146.7000**	88.5	Indianapolis W9IRA WTHR tower PL88.5
● 344	**IND760**	**146.7600**	151.4	Indianapolis K9LPW Fusion PL151.4 |…
● 345	**IND880**	**146.8800**	88.5	Indianapolis W9RCA Echo/Fusion PL88…
● 346	**IND970**	**146.9700**	107.2	Indianapolis W9ICE IRLP PL107.2 | S…
347	**KEM145**	145.2800	131.8	Kempton K9TRC (Tipton) PL131.8
348	**LEB147**	147.1050	77.0	Lebanon N9HLL (Boone) PL77.0
349	**MTC147**	147.1650	88.5	Montclair KO9F (Hendricks) PL88.5
● 350	**NBL145**	**145.1700**	77.0	Noblesville K9EOC (Hamilton) PL77.0…
351	**NCS145**	145.4500	127.3	New Castle NT9J (Henry) PL127.3
● 353	**NCS739**	**147.3900**	127.3	New Castle W9OB AllStar (Henry) PL1…
354	**STL145**	145.2900	88.5	Stilesville AB9D (Hendricks) PL88.5
355	**SUM310**	145.3100	131.8	Summitville WB9UCF (Madison) PL131.8
● 356	**IND745**	**146.7450**	D346	Indianapolis W9AMT AllStar (Marion)…
357	**MRV110**	145.1100	88.5	Mooresville W9WWV (Morgan) PL88.5
● 358	**SHB480**	**145.4800**	88.5	Shelbyville W9NTP (Shelby) PL88.5
360	**MTV706**	147.0600	88.5	Martinsville K9PYI (Morgan) CSQ
361	**MTV725**	147.2550	88.5	Martinsville W9ZSK (Morgan) PL88.5
362	**MGN230**	145.2300	151.4	Morgan Co K4IO (Martinsville area) …
363	**RSH147**	147.0000	127.3	Rushville W9NTP (Rush Co ~40mi) PL1…
364	**NBLDIG**	145.0900	—	Hamilton Co EM packet/APRS digipeat…
Ham 70 cm				
218	**CPR464**	464.1125	—	Conner Prairie 1 ops WQLH307 (Fishe…
219	**CPR463**	463.6375	—	Conner Prairie 3 ops WQLH307 (Fishe…
231	**CPRdmr**	463.7250	—	Conner Prairie 2 ops WQLH307 (Fishe…
600	**432100**	432.1000	—	70cm SSB DX/weak-signal calling - S…
601	**433500**	433.5000	—	70cm FM calling (international) / c…
602	**445950**	445.9500	—	70cm FM simplex
603	**445975**	445.9750	—	70cm FM simplex
604	**446125**	446.1250	—	70cm FM simplex
605	**446175**	446.1750	—	70cm FM simplex
606	**70-025**	446.0250	—	70cm simplex
607	**70-050**	446.0500	—	70cm simplex
608	**70-075**	446.0750	—	70cm simplex
609	**70-100**	446.1000	—	70cm simplex
610	**70-150**	446.1500	—	70cm simplex
611	**70-200**	446.2000	—	70cm simplex
● 612	**70CALL**	**446.0000**	—	70cm national calling
● 613	**AND422**	**442.2750**	151.4	Anderson W2NAP AllStar (Madison) PL…
614	**AND433**	443.3500	110.9	Anderson Fire Trng WA9CWE (Madison)…
615	**AND446**	444.6750	—	Anderson WA9EOC (Madison) CSQ
616	**ARC362**	443.6250	88.5	Arcadia K3HTK Fusion (Hamilton) PL8…
● 617	**GFD444**	**444.4500**	D465	Greenfield W9ATG (Hancock) DCS465
618	**GWD423**	442.3500	151.4	Greenwood KQ9Y Fusion (Johnson) PL1…
619	**GWD435**	443.5250	151.4	Greenwood W9MID Fusion (Johnson) PL…
● 620	**HOR395**	**443.9500**	77.0	Hortonville K9EOC WIRES-X (Hamilton…
● 621	**IND265**	**442.6500**	77.0	Indianapolis KM9E PL77.0 | SKYWARN …
622	**IND300**	443.0000	100.0	Indianapolis WB9PGW PL100.0
● 623	**IND325**	**443.2500**	100.0	Indianapolis KM9E PL100.0 | SKYWARN…
● 624	**IND332**	**443.3250**	156.7	Indianapolis W9EIB Echo PL156.7
● 625	**IND342**	**443.4250**	D043	Indianapolis K9IP IRLP DCS043
626	**IND375**	443.7500	100.0	Indianapolis K9LPW WIRES-X PL100.0
627	**IND380**	443.8000	—	Indianapolis KC9COP CSQ
628	**IND385**	443.8500	88.5	Indianapolis W9IRA WTHR PL88.5
629	**IND400**	444.0000	100.0	Indianapolis NE9T PL100.0
630	**IND432**	444.3250	136.5	Indianapolis KB9SGN PL136.5
632	**MTC442**	442.9000	88.5	Montclair KO9F Fusion (Hendricks) P…
● 633	**NBL355**	**443.5500**	77.0	Noblesville K9EOC (Hamilton) PL77.0…
634	**NCS441**	441.4000	141.3	New Castle K9TDX (Henry) PL141.3
635	**NCS444**	444.2750	127.3	New Castle NT9J (Henry) PL127.3
636	**SHP443**	443.7000	131.8	Sharpsville K9TRC (Tipton) PL131.8
● 637	**TIP443**	**443.1250**	131.8	Tipton K9TRC (Tipton) PL131.8
638	**ICE390**	443.9000	77.0	W9ICE 900MHz-system HUB (WB9OPR QTH…
639	**IND237**	442.3750	—	Indianapolis K9DC IRLP (Marion) CSQ
640	**GFD472**	444.7250	—	Greenfield W9ATG (Hancock) 444.725 …
641	**EDB025**	443.0250	103.5	Edinburgh N9JWR (Shelby) PL103.5
642	**MTV425**	444.2500	100.0	Martinsville W9ZSK (Morgan) CSQ
643	**MTV495**	444.9500	100.0	Martinsville K9PYI (Morgan) CSQ
644	**SHB975**	444.9750	—	Shelbyville W9NTP (Shelby) CSQ
645	**NBL25**	444.6250	—	NF9K P25 NAC293 (Noblesville) - NEW…

VHF / UHF Handheld — Channel & Net Reference

RX 108–136 (AM air) · 136–174 · 350–390 · 400–520 MHz TX 136–174 · 400–480 MHz (FM, 5 W)

Indianapolis Metro

GMRS ch → GMRS licence · Ham 2m/70cm → Technician · MURS/FRS licence-free

US AMATEUR BANDS & PRIVILEGES

Band	MHz	Who can use it
160 m	1.8 - 2.0	General+
80 m	3.5 - 4.0	Gen+ (Tech: CW slice)
60 m	5 chans ~5.3	General+ (shared federal)
40 m	7.0 - 7.3	Gen+ (Tech: CW slice)
30 m	10.1 - 10.15	General+ - CW/digital only
20 m	14.0 - 14.35	General+
17 m	18.068 - 18.168	General+
15 m	21.0 - 21.45	Gen+ (Tech: CW slice)
12 m	24.89 - 24.99	General+
10 m	28.0 - 29.7	**TECH: 28.3-28.5 SSB + CW**
6 m	50 - 54	**Technician+**
2 m	144 - 148	**Technician+**
1.25 m	222 - 225	**Technician+**
70 cm	420 - 450	**Technician+**
33 cm	902 - 928	Tech+ (also MeshCore LoRa)
23 cm	1240 - 1300	**Technician+**

LICENSE LADDER

TECHNICIAN - 35 Q: all VHF/UHF + 10 m voice slice.
GENERAL - 35 Q: most of every HF band.
AMATEUR EXTRA - 50 Q: everything.
Study free at hamstudy.org - local exam sessions:
indianahamradio.com/exams - no Morse code required.

CALLING & ACTIVITY FREQUENCIES

FM SIMPLEX CALLING

6 m	**52.525**
2 m	**146.520**
1.25 m	**223.500**
70 cm	**446.000**

SSB CALLING

10 m (Tech!)	**28.400**
6 m	**50.125**
2 m	**144.200**
70 cm	**432.100**

FT8 - busiest mode in ham radio

80/40/30 m	**3.573 / 7.074 / 10.136**
20/17/15 m	**14.074 / 18.100 / 21.074**
12/10/6 m	**24.915 / 28.074 / 50.313**

CW / QRP

CW QRP	**7.030 / 14.060**
SSB QRP	**14.285**

DX WATERING HOLE

20 m SSB DX	**14.150 - 14.300**

TIME SIGNALS & BEACONS

WWV (AM): 2.5 / 5 / 10 / 15 / 20 MHz - atomic time
CHU Canada: 3.330 / 7.850 / 14.670 MHz
NCDXF beacons: 14.100 / 18.110 / 21.150 / 24.930 / 28.200
Hear a beacon = that band is open to that region.

Q-CODES - the shorthand you'll hear

QSO	a contact / conversation
QRZ?	who is calling me?
QTH	my location
QSL	received & confirmed
QRM	man-made interference
QRN	static / noise
QRP	low power operating
QSY	changing frequency
QRT	shutting down
QST	bulletin to all hams
73	best regards
88	hugs & kisses


Signal report RST: "59" = readability 5, strength 9

RESOURCES

arrl.org	national assoc + band charts
hamstudy.org	free exam prep
indianahamradio.com	clubs / nets / exams statewide
repeaterbook.com	ham repeater directory
mygmrs.com	GMRS repeaters + network
pota.app	Parks on the Air spots
brandmeister.network	DMR + Hoseline listening
netlogger.org	watch net check-ins live
pigletradio.org	local club N9BCN, POTA, Discord
HAMCOHAM group	net reports: groups.google.com/g/hamcoham
okimesh.org	MeshCore LoRa mesh (region)


New here? Listen first - then: HamStudy -> Technician exam ->
check into the Who Knows What Net (Thu 8 PM, 443.950 +5, PL 77.0).

HOW A REPEATER WORKS

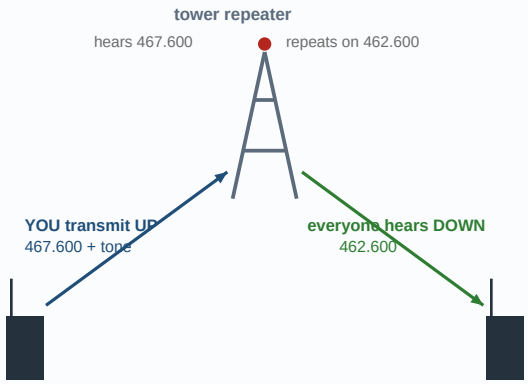

offset: UHF +5 MHz · 2 m ±0.6 MHz
tone (PL/DCS) = the key that opens the door
height beats power — a 5 W HT works 40+ mi via tower
pause 1/2 s after keying before you talk

HOW MESHCORE WORKS (LoRa mesh)

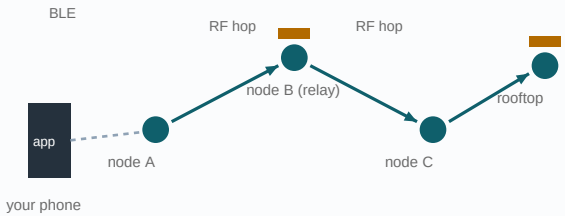

SETTINGS — flash at flasher.meshcore.io (Companion=handheld, Repeater=fixed)
RADIO (Indiana preset): 910.525 · BW 62.5 · SF 7 · CR 5 · Hash 2B · TX 22 dBm
CHANNELS: #public (default) · #okimesh · #info · test nodes in #test
also: #emergency · #skywarn · #hamradio · #weather
Encrypted text · no internet/towers/licence (902–928 ISM Part 15).
LOCAL: CIMN (cimesh.net) — FREE repeater hardware for prime sites!
okimesh.org · cimesh.net · live map: map.okimesh.org · IN Mesh Discord

DMR IN 4 STEPS (digital voice)

1. Get your ham licence (Technician is enough).
2. Get a free DMR ID at radioid.net — it's your digital call sign.
3. Build the codeplug. Each channel needs FOUR things:
   Frequency · Color Code (like a PL tone) ·
   Time Slot (1 or 2) · Talkgroup (the "room")
4. Key up — the talkgroup routes you: local repeater or a
   $100 hotspot → BrandMeister → the world.

WHY IT'S DIFFERENT: 2 time slots = 2 conversations on one
repeater at once. Talkgroups = chat rooms spanning networks
(TG 3118 = all Indiana · TG 31189 = Crossroads · TG 91 = world).
One radio + one hotspot reaches every DMR net on earth.

LISTEN FREE FIRST: hose.brandmeister.network (no radio needed)
DECODE LOCALLY: RTL-SDR + SDRTrunk hears DMR off the air.
Local DMR RF: 441.200 Indy · W9AMT 146.745 (mixed FM/DMR).