

Document Production (C.0)

Installation Guide

This guide provides information to install Document Production. It also outlines steps for testing the application after installation.

Revision date - May 30, 2008



© 2008 Computer Sciences Corporation. El Segundo, California. All rights reserved. No part of this publication may be reproduced by any means without written permission from Computer Sciences Corporation. Printed in U.S.A. All questions regarding this documentation should be routed through customer assistance, Blythewood, SC, 803-333-6200 or email pcssupport@csc.com.

Table of Contents

Chapter 1: Overview.....	4
Chapter 2: Contents of the DVD.....	6
Chapter 3: Pre-Installation Checklist.....	9
Chapter 4: Installing the System	11
Install Document Production (C.0)	13
Install Document Print (C.0) - 1 Server Configuration.....	21
Install Document Print (C.0) - 2 Servers Configuration	28
Application Server Installation	28
Web Server Installation.....	37
Install Additional Skywire Products—Optional	43
Docucorp Version 11.2 Software.....	43
Install Skywire 11.2 Documentation.....	45
Create Desktop Shortcuts on Client PC.....	46
Chapter 5: Required Post-Installation Steps.....	47
Create SQL Server Database	48
Create ODBC Connection.....	51
Configure INI Files	54
Set Primary Key in CATALOG Table	55
Chapter 6: Running Antivirus Software	57
Chapter 7: Checking Your Installation	58
Test Document Production Using POINT IN Sample Resource Library.....	59
Test Document Print Using the Document Print Test Page.....	62
Test Document Print Using POINT IN Sample Resource Library	63
Chapter 8: Troubleshooting.....	65
Chapter 9: Post-Installation Checklist.....	68
Chapter 10: Running Document Production – POINT IN.....	69
Configuring CpyExtr.bat File.....	69
Appendix A: Additional Environment and Setup Considerations for	

Document Print	71
NTFS File System Permissions Required For Document Print	71
IIS Anonymous Security Considerations for Document Print.....	72
Synchronization of IWAM_<ServerName> ID on Communicating Servers...	73

Chapter 1: Overview



Before you begin installing Document Production, please ensure that you have completed the following tasks. Failure to do so may result in rework and problems during the installation.

- 1 Verified that your server(s) meet the hardware and software requirements defined in the [Installation Readiness Assessment Guide](#).
- 2 Have access to technicians familiar with the technologies defined in the [Installation Readiness Assessment Guide](#).

If you have any questions about these requirements, please contact the CSC technician assigned to your implementation.

This guide is designed to provide you with steps to install and test the current release of Document Production. The content of this guide contains the following topics:

- **Contents of the DVD**
Describes what the installation DVD contains.
- **Pre-Installation Checklist**
Provides a checklist of tasks to perform before installing the system.
- **Installing the System**
Explains how to install the system.
- **Checking Your Installation**
Explains how to test your installation using the sample extract file provided with the POINT IN master resource library.
- **Post-Installation Checklist**
Provides a checklist of tasks to perform after installing the system.
- **Running Document Production**
Provides a list of prerequisites and steps to configure Document Production to process an extract file generated from POINT IN.

Chapter 2: Contents of the DVD

This release of Document Production includes one DVD and contains the following:

- Skywire Documaker RP 11.2 patch 07
- Skywire Documaker RP 11.2 Documentation
- Document Production (C.0)
- Document Print (C.0)

Skywire RP 11.2 patch 07 installation contains the following:

Skywire Documaker RP 11.2

Includes the following components:

- Documaker Studio - Development environment for developing customized solutions (form, help, etc.)
- Docucreate Workstation Tools - Windows-based tools used in developing customized solutions; forms, help, etc.
- Documaker Server – Documaker Server Rules Publishing programs: GENTRN, GENDATA, etc.
- Documaker Workstation – Allows you to work with the transaction visually, print, etc.

Common Objects

Tools used with Skywire products to perform many common tasks. Required for PrintCommander.

Control Panel

Performs many of the tasks required to configure and coordinate Skywire products. Required for PrintCommander.

PrintCommander

Functions as a printer driver that formats Microsoft Word (or any other Windows application that can print) documents into a .FAP file for Document Production.

TagCommander

Allows tags to be inserted into Microsoft Windows documents for ultimate data merging with Documaker RP. Used with PrintCommander.

FontCommander

FontCommanderTM, a Skywire® utility program, controls all manner of font issues including tasks associated with converting and maintaining fonts in either the IBM AFP or Xerox Metacode font environment.

Transall Lite

A universal data translator that bridges information between applications. Useful for creating and manipulating extract files.

Documanager 6.4 (including Docusave Server 2.0)

A client/server solution that archives, retrieves, displays, and prints documents originally created using Documaker RP archive files or either Xerox Metacode or IBM AFP printer data streams.

Sample Master Resource Libraries

Sample resource libraries containing test results and sample data.

Skywire RP 11.2 Documentation includes documentation for Skywire's RP products.

Document Production (C.0) installation includes the following:

Program Files

Contains the base Skywire's RP 11.2 system and CSC's value add program files.

Agency Link Sample Library

Sample Library used by the Agency Link application. Library contains sample Personal Auto ID card and ACORD policy applications.

Exceed Sample Libraries

Contains two versions of the sample resource library, a non Documaker Studio and a Documaker Studio

The non Documaker Studio is a flat-file version (resources not stored in library manager) and cannot be used with the Documaker Studio workbench. The Documaker Studio version was converted from the flat-file version to library manager and can be used with the Documaker Studio workbench.

POINT Sample Libraries

Contains two versions of the sample resource library, a non Documaker Studio and a Documaker Studio

The non Documaker Studio is a flat-file version (resources not stored in library manager) and cannot be used with the Documaker Studio workbench. The Documaker Studio version was converted from the flat-file version to library manager and can be used with the Documaker Studio workbench.

Media Management Sample Libraries

Contains sample libraries that are used by Media Management for demonstration purposes and for testing the installation of Media Management.

CSC Documentation

Documentation for custom rules and functions added to Skywire's base system.

SDK - Software Development Kit

Source libraries that may be modified and re-compiled for custom solutions.

PDF Print Driver

PDF print driver to produce PDF print files for Document Print.

Note: Customers who are licensed for Media Management with Skywire's Internet Document Server (IDS) will have a key value printed on the inside of the jewel case. This key value is needed to install the PDF print driver.

Document Print installation includes the Document Print system, a test page use for testing, and sample resource libraries.

Chapter 3: Pre-Installation Checklist

Use the checklist below to ensure that you have all the necessary information before installing Document Production.

Installing Document Production	
Installation Path (for example, <drive>:\DocProd)	
Note: It is recommended that Document Production not be installed on the operating system drive.	
PDF Print Driver Key Value If you are licensed for Media Management with IDS, a key value will be located on the inside cover of the jewel case. This key value is required to install the PDF print driver for Document Print.	

Installing Document Print	
Web Server IP Address (2 server configuration)	
Application IP Address (2 server configuration)	
Installation Path of Document Production	
Available Port on the Application Server (2 server configuration)	
ODBC Data Source Name	
SQL Server Authentication Login ID	
SQL Server Authentication Login Password	

For existing Document Production customers:

It is highly recommended that you install the system into a new environment. The installation will overwrite any existing files in the target directory. If you are planning to install into an existing environment, back up any custom coded version of the

files. For example, if you have made any custom changes to CLNTLIB, CSCCLIB, or CUSLIB in the SDK library, you will need to back up these libraries before installing. After the installation, you will need to merge your custom code with the new files.

Below is a recommendation list of libraries you should back up if you have made changes to them:

Drive:\<path>\mstrres\PNTBASE
Drive:\<path>\mstrres\PNTBASEDMS
Drive:\<path>\mstrres\EXCDBASE
Drive:\<path>\mstrres\EXCDBASEDMS
Drive:\<path>\mstrres\FMRES
Drive:\<path>\SDK

Chapter 4: Installing the System

Before proceeding with the installation, ensure that you have closed all applications that are currently running.

When the install DVD is inserted into the DVD drive, installation starts automatically and the main menu screen will appear.

Note: *If the install DVD does not start automatically, browse the DVD and execute `SETUP.EXE`, which will be located on the root of the DVD.*

The following options are available on the main menu screen:

Main Menu	Display Main Menu screen
Documentation	Display screen to view documentation
Install Product	Display screen containing list of products to install
Browse Content	Browse contents of the DVD
Visit Our Web Site	Display CSC Web site
Contact Us	Display CSC contact information
Exit	Exit the DVD


If you have not reviewed the system requirements, it is strongly recommended that you do. To view the system requirements, click **Documentation > System Requirements**. This will display the *Installation Readiness Assessment Guide*.

Doc-


Note: Most documents are in PDF format and require the Adobe Acrobat Reader to view them. To install the Acrobat Reader, click the *Install Adobe Acrobat Reader* button on the *Documentation* menu screen.

After all system requirements have been met, begin installing Document Production.

From the **Main Menu** screen, click **Install Product** to display the **Install Product** screen. The following sections will provide installation steps for each product listed on the screen.

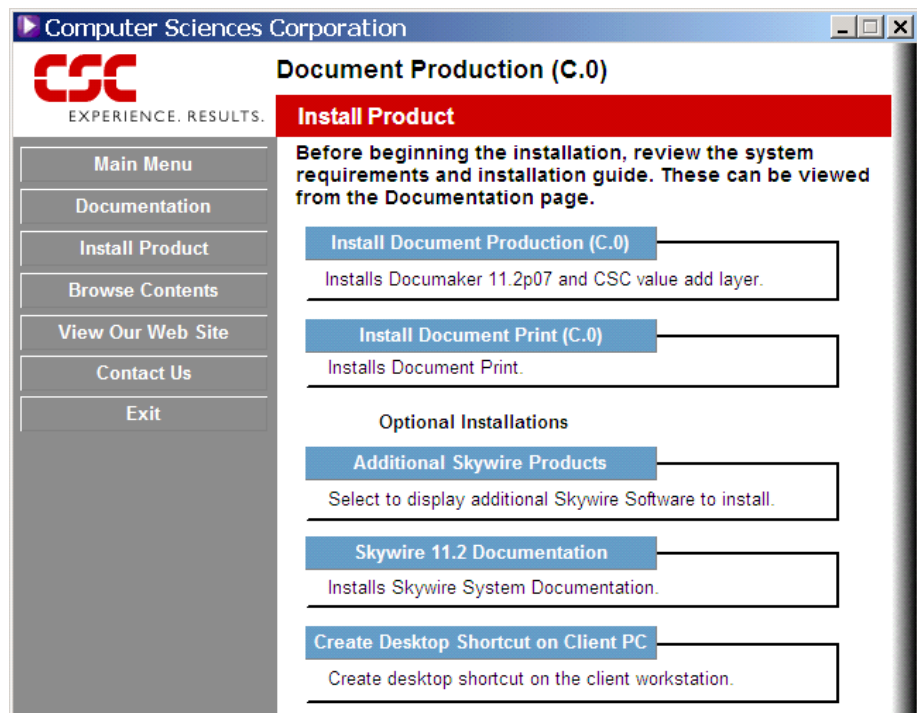


Install Document Production (C.0)

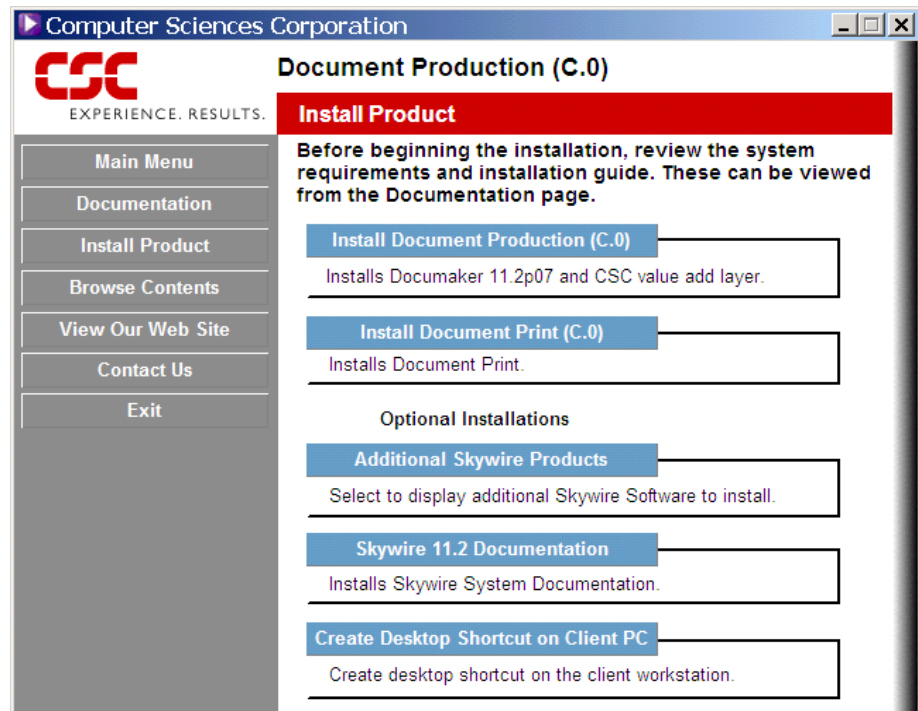


- 1 Click **Install Document Production (C.0)** to install the Document Production C.0 system.

Note: The installation of Document Production (C.0) now includes the base Skywire 11.2 system and the CSC Value Add layer. The separate installation of the base Skywire system is no longer a requirement.


The base Skywire 11.2 system can be installed independently of Document Production by clicking on “Additional Skywire Components.”

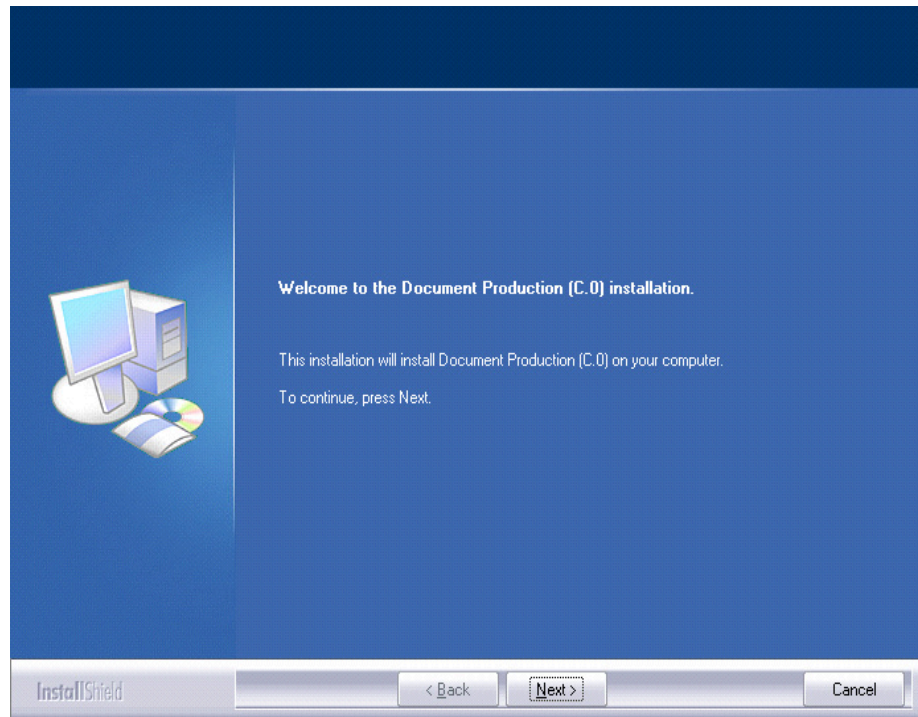


- 2 Click **Next**.

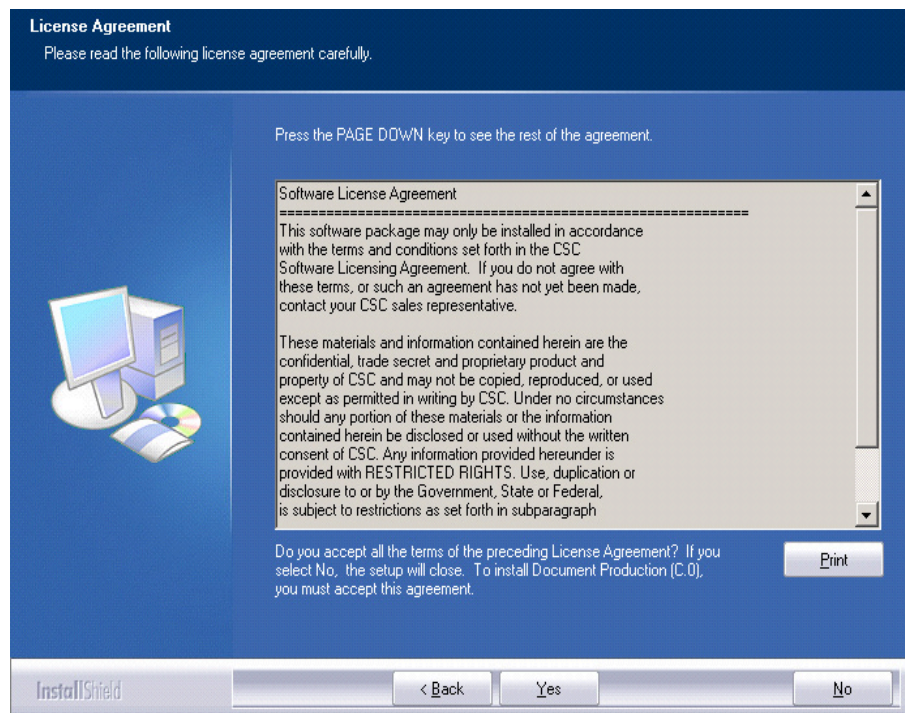

- 3 Please read the Software License Agreement carefully. Click **Yes** to accept the licensing terms and conditions.

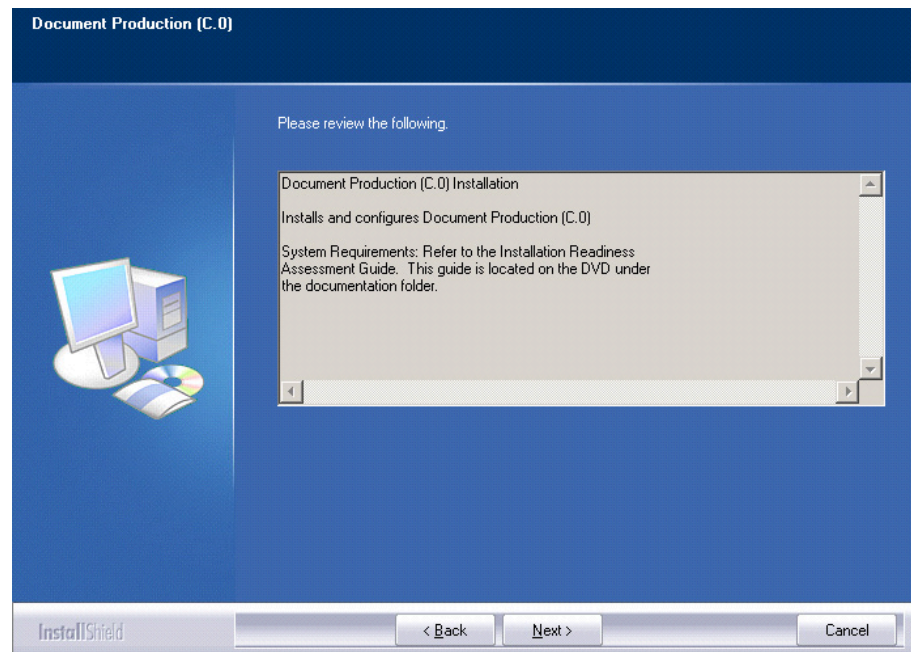


4 Click **Next**

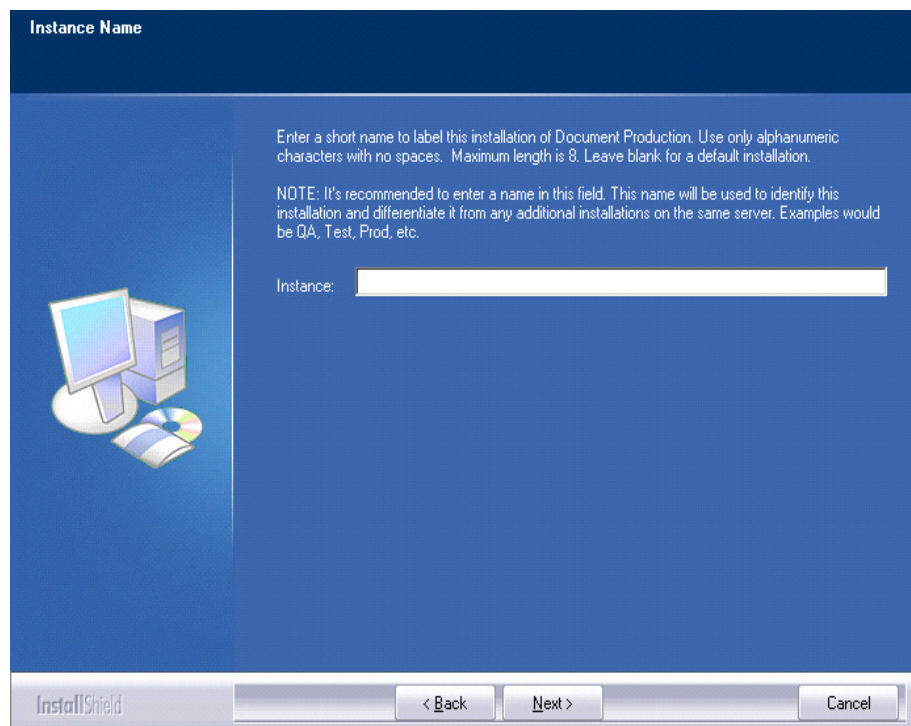


5 Enter a short name to label this installation of Document Production. Use only alphanumeric characters with no spaces. Maximum length is 8 characters. Leave blank for a default installation. Click **Next**.

NOTE: *It is recommended to enter a name in this field. This name will be used to identify this installation and differentiate it from any additional installations on the same server. Examples would be DEV, TEST, PROD, etc.*

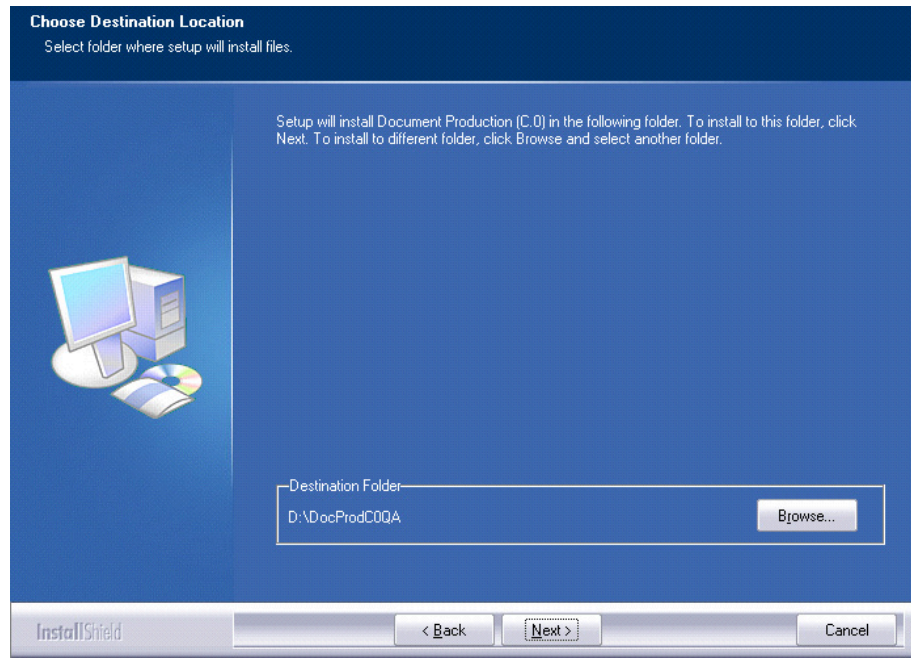

- 6 The default folder name is DocProdC0 plus the instance label entered on the previous screen.

Click **Next** to accept the default path, or click **Browse** to select the path for the installation and then click **Next**.

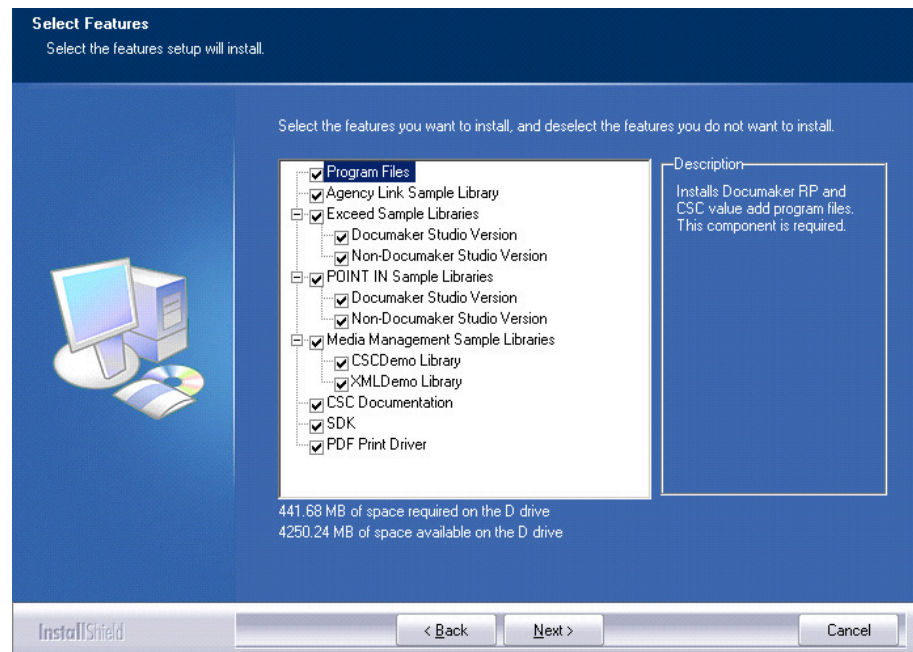

- 7** Select the component(s) you want to install. Clear the component(s) you do not want to install. The default is for all components to be selected.

Below is a description of each component to help you decide which one you will need:

- **Program Files**

Contains the base Skywire's 11.2 system and CSC's value add program files. This component is required.

- **Agency Link Sample Library**

Sample library used by the Agency Link application. Library contains sample Personal Auto ID card and ACORD policy applications.

- **Exceed Sample Libraries**

Contains two versions of the sample resource library, a non Documaker Studio and a Documaker Studio

The non Documaker Studio version is a flat-file version (resources not stored in library manager) and cannot be used with the Documaker Studio workbench. The Documaker Studio version was converted from the flat-file version to library manager and can be used with the Documaker Studio workbench.

- **POINT Sample Libraries**

Contains two versions of the sample resource library, a non Documaker Studio and a Documaker Studio

The non Documaker Studio is a flat-file version (resources not stored in library manager) and cannot be used with the Documaker Studio workbench. The Documaker Studio version was converted from the flat-file version to library manager and can be used with the Documaker Studio workbench.

- **Media Management Sample Libraries**

The CSCDEMO and XMLDEMO libraries are used by Media Management for demonstration purposes and for testing the installation of Media Management.

- **CSC Documentation**

Documentation for custom rules and functions added to Skywire's base system.


- **SDK - Software Development Kit**

Source code that can be modified - except for RULLIB - and recompiled for custom solutions.

- **PDF Print Driver**


The PDF print driver allows Document Production to produce PDF print files for Document Print.

Note: Step 8 only applies if you have selected the PDF Print Driver component to be installed.

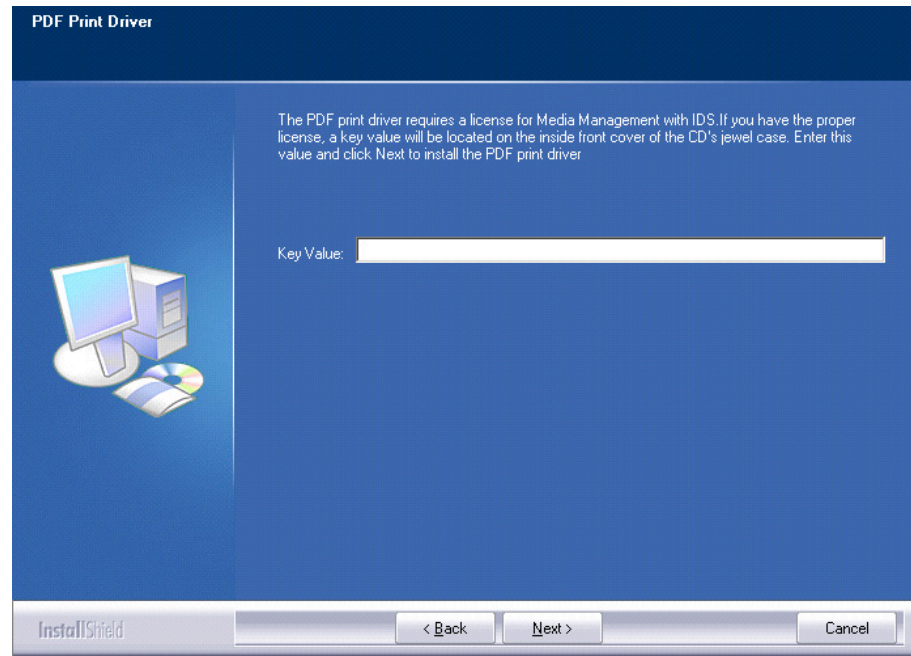

- 8 The PDF print driver allows Document Production to produce PDF print files for Document Print. Because the PDF print driver is a component of Skywire's Internet Document Server (IDS) and not Document Production, you must be licensed for Media Management with IDS before you can install the PDF print driver. If you have the proper licensing, there will be a key value printed on the inside of the jewel case. Enter this key value in the space provided. If you do not have a key value, leave the field blank and click **Next** to continue.

If you have questions on whether or not you are licensed for Media Management with IDS, contact your CSC Account Representative or the CSC Help Desk at PCSSupport@CSC.com.

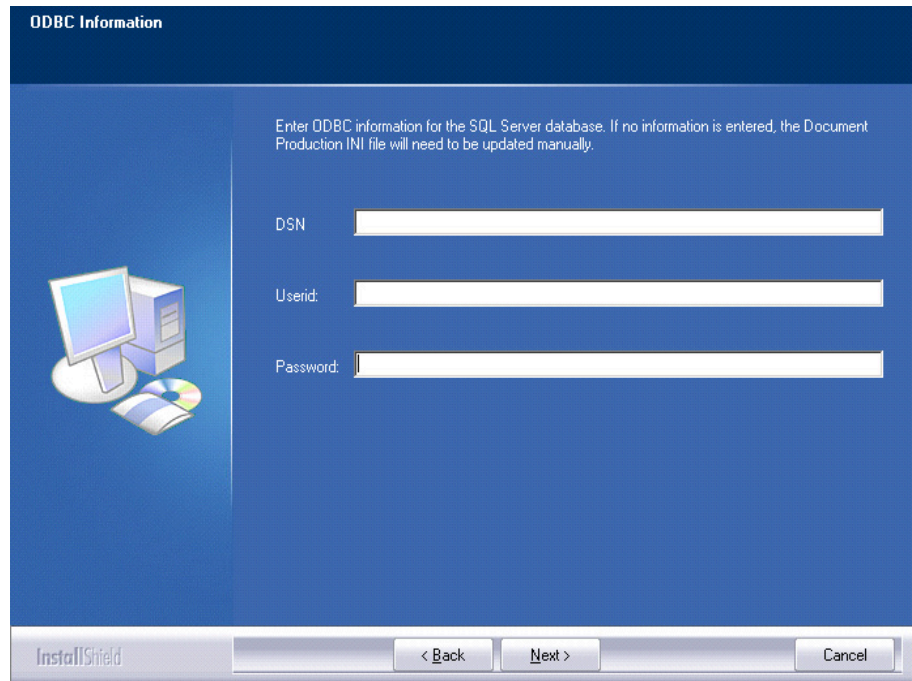

ODBC Information

Enter ODBC information for the SQL Server database. If no information is entered, the Document Production INI file will need to be updated manually.


DSN:

Userid:

Password:

InstallShield

- 9 Enter the ODBC information that will be used for connecting to the Document Production SQL Server database. If no information is entered, the Document Production FSISYS.INI file will need to be updated manually. Refer to Chapter 5 “Required Post-Installation Steps” for additional information. Click **Next**.

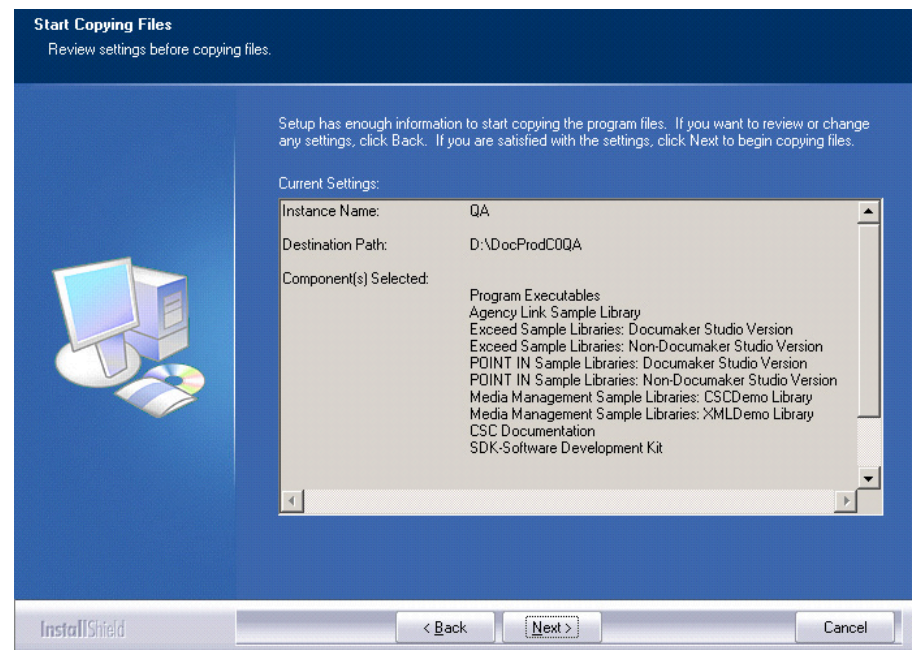

Start Copying Files
Review settings before copying files.

Setup has enough information to start copying the program files. If you want to review or change any settings, click Back. If you are satisfied with the settings, click Next to begin copying files.

Current Settings:

Instance Name: QA


Destination Path: D:\DocProdC0QA

Component(s) Selected:

- Program Executables
- Agency Link Sample Library
- Exceed Sample Libraries: Documaker Studio Version
- Exceed Sample Libraries: Non-Documaker Studio Version
- POINT IN Sample Libraries: Documaker Studio Version
- POINT IN Sample Libraries: Non-Documaker Studio Version
- Media Management Sample Libraries: CSCDemo Library
- Media Management Sample Libraries: XMLDemo Library
- CSC Documentation
- SDK-Software Development Kit

InstallShield

- 10 Review the information on this screen. Click **Back** to make changes or click **Next** to start the installation.

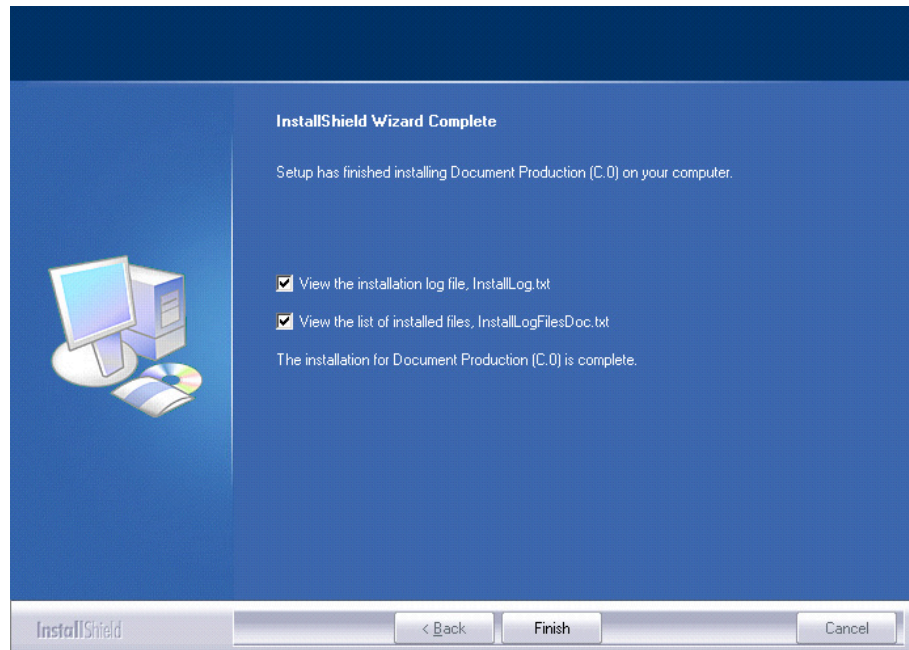


- 11 Click **Finish** to complete the installation.


Install Document Print (C.0) - 1 Server Configuration

This section provides installation instruction on how to install Document Print as a one server configuration. A one server configuration means that both the Web and application components of Document Print are installed together on the same server where Document Production (C.0) was installed. To install Document Print as a two server configuration, please see the next section Install Document Print (C.0) - 2 Server Configuration.


To begin installation of Document Print, insert the DVD on the server where Document Production was installed and follow the installation steps given below.

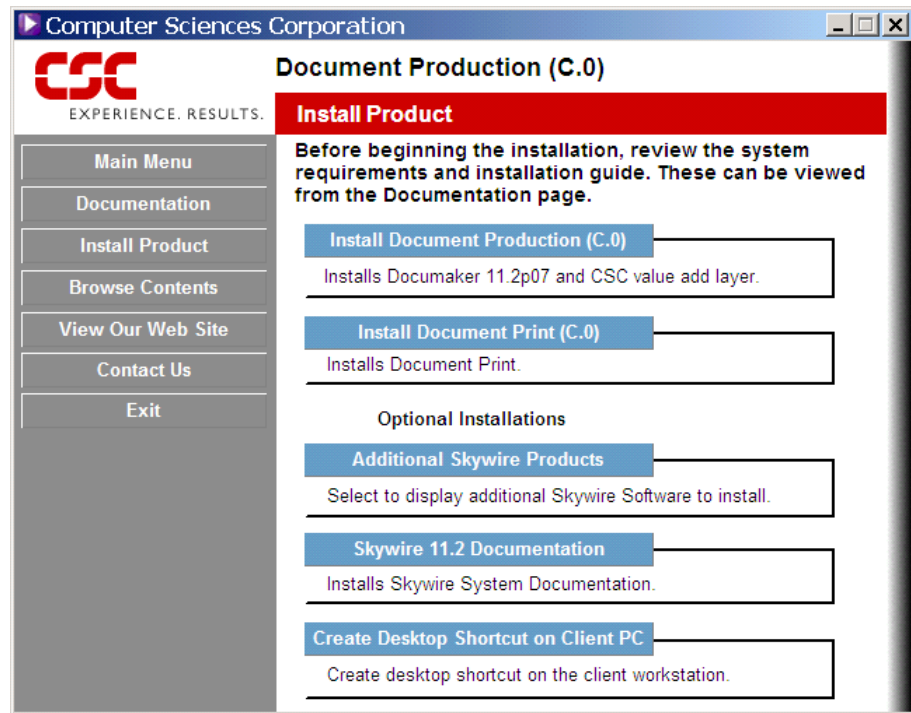


- 1 Click **Install Document Print (C.0)** to begin installation of Document Print.

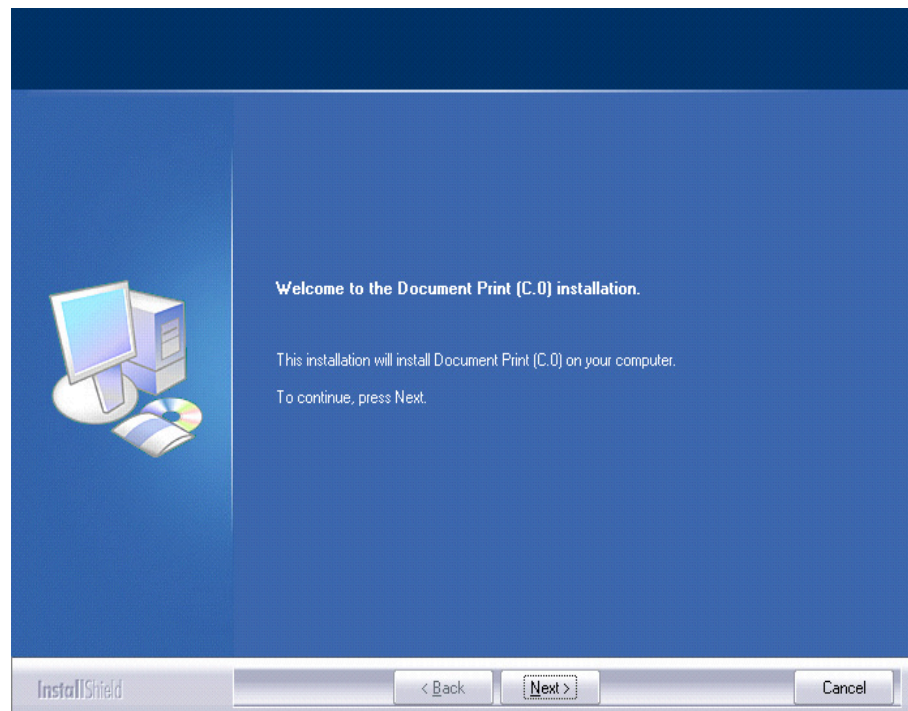


- 2 Click **Next**.

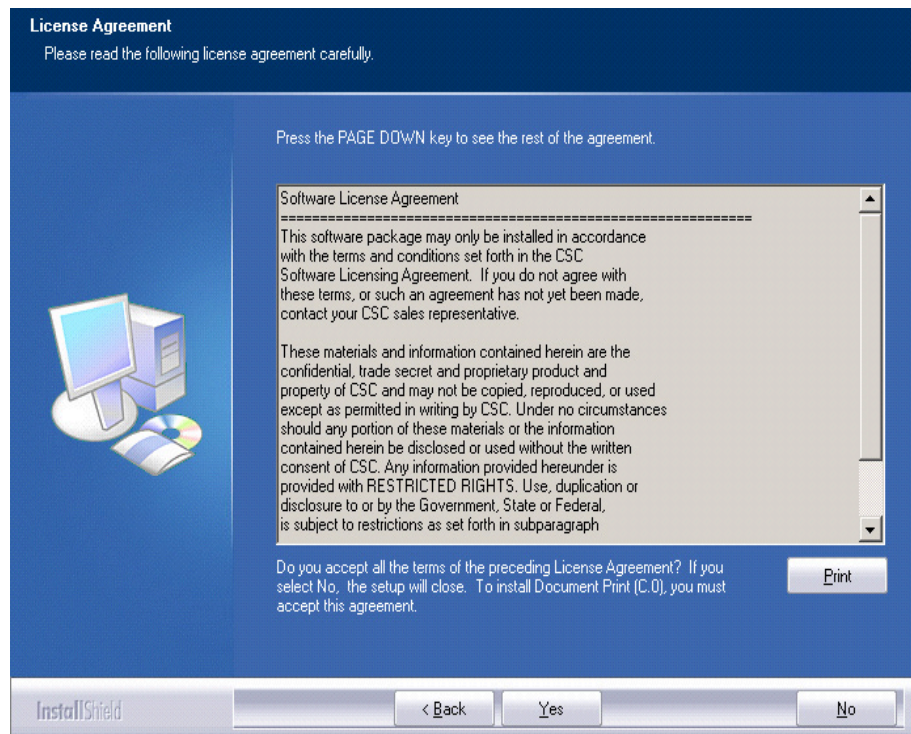


- 3 Please read the Software License Agreement carefully, and then click **Yes** to accept the licensing terms and conditions.

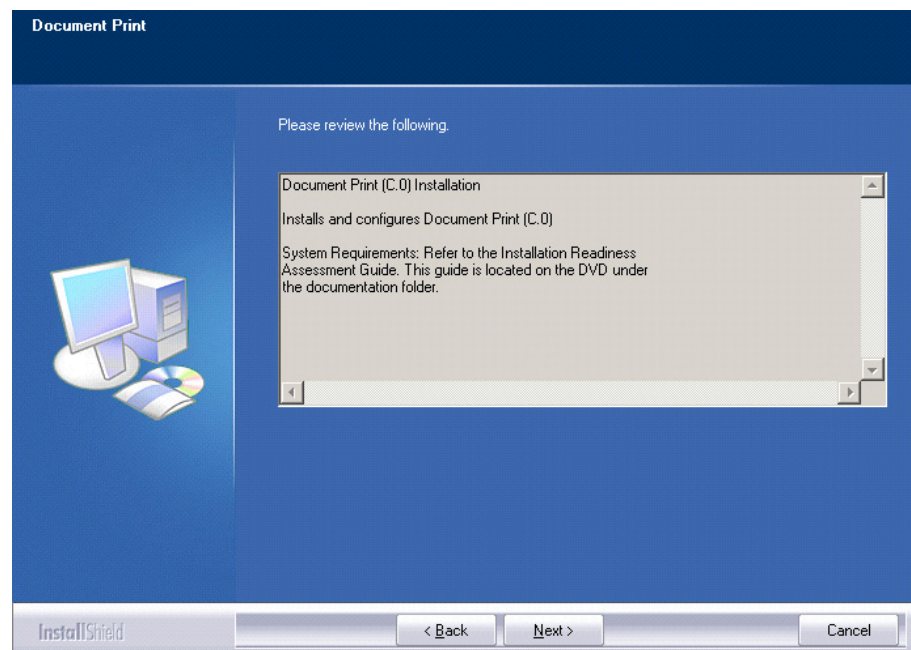

- 4 Click **Next**.

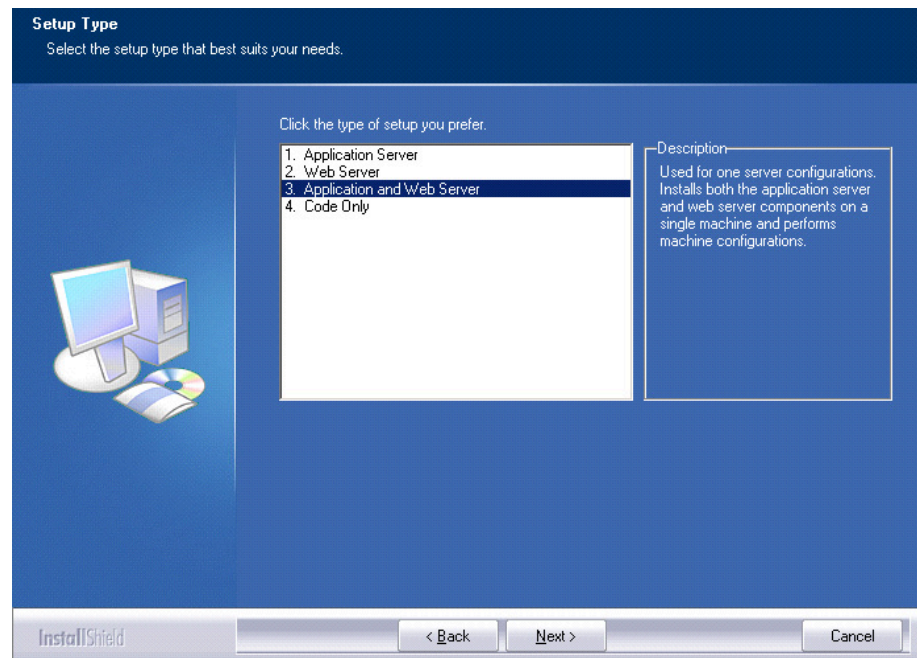


- 5 Select option three, **Application and Web Server** and click **Next** . Option three allows you to install Document Print as a one server configuration.

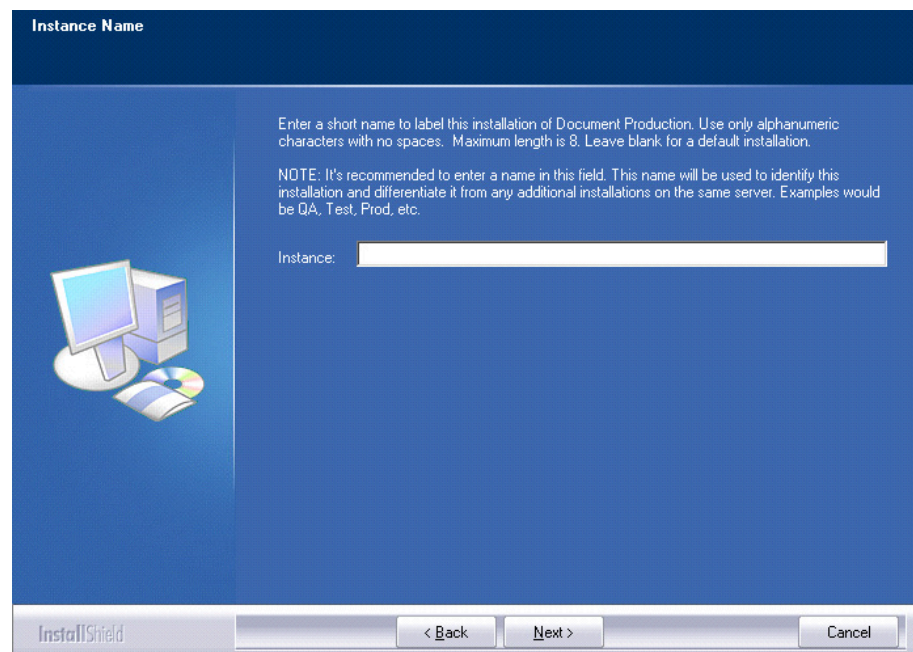


- 6 On the **Instance Name** page, enter a named instance for your installation or leave blank for a default name. A named instance labels this installation and it allows additional named instances to be installed side-by-side on the same server. Use only alphanumeric

characters with no space. Maximum length is 8. Examples would be QA, TEST, PROD, etc. Click **Next**.

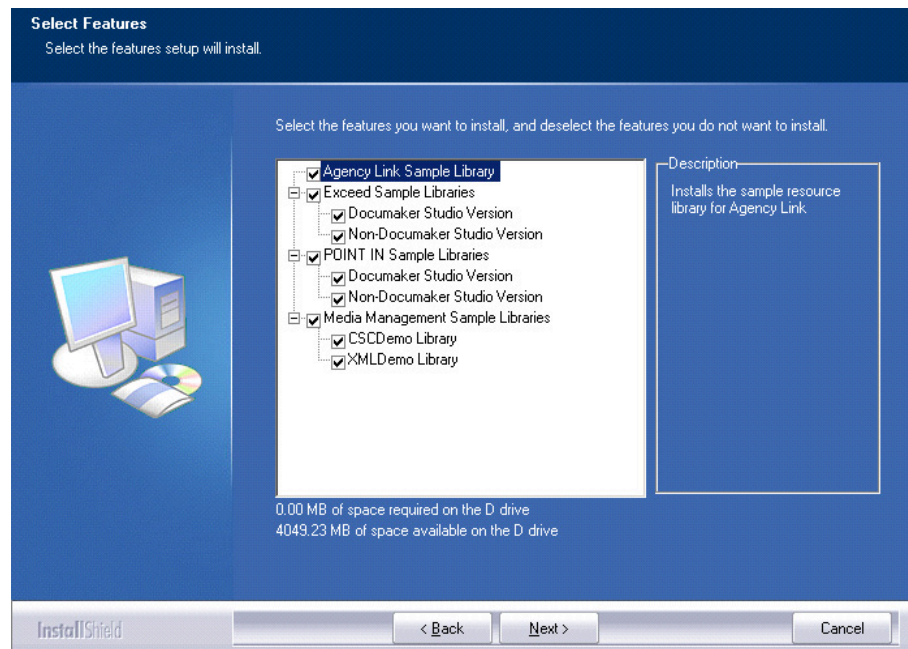


- 7 The **Select Feature** page allows you to select the sample resource libraries you want to install for Document Print. All components are selected by default. Clear the ones you don't want to install. Click **Next**.

Note: If you are installing *Media Management (C.0)*, you will need to install the **Media Management Sample Libraries** because it is required to test the installation of *Media Management*.

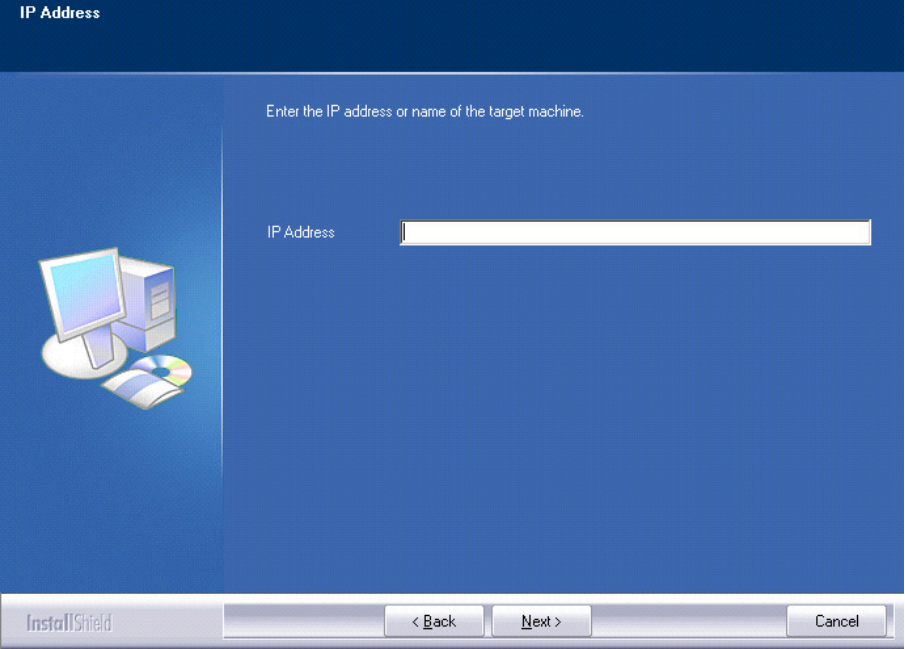


The dialog box is titled "IP Address" and has a blue background. On the left, there is an icon of a computer monitor, a tower unit, and a CD/DVD. The main area contains the text "Enter the IP address or name of the target machine." Below this text is a label "IP Address" followed by a text input field. At the bottom, there is a "Back" button, a "Next >" button, and a "Cancel" button. The "InstallShield" logo is in the bottom left corner.

- 8 Enter the IP address or server name of the target machine. Click **Next**.

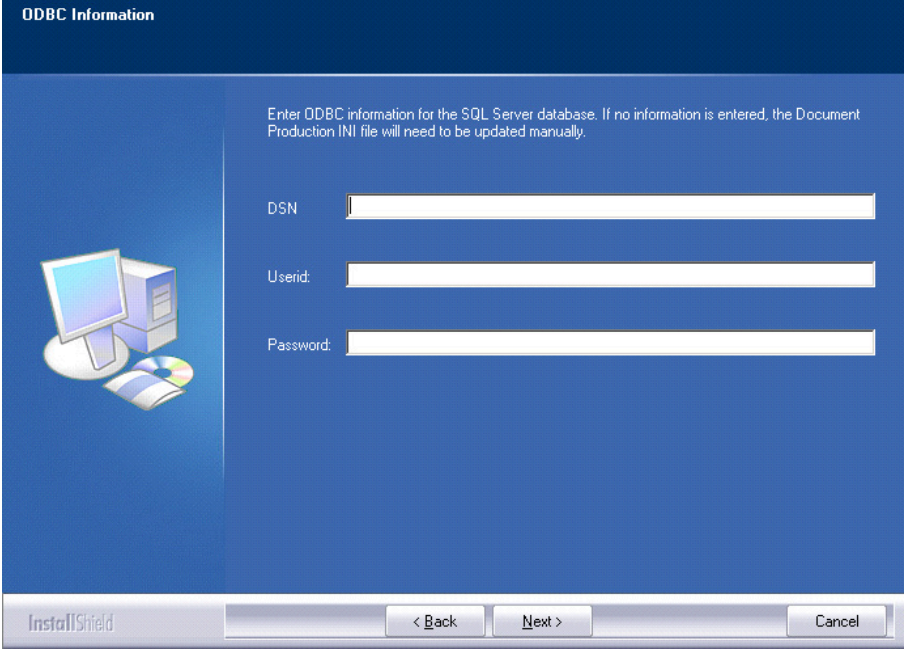


The dialog box is titled "ODBC Information" and has a blue background. On the left, there is an icon of a computer monitor, a tower unit, and a CD/DVD. The main area contains the text "Enter ODBC information for the SQL Server database. If no information is entered, the Document Production INI file will need to be updated manually." Below this text are three labels: "DSN", "Userid:", and "Password:", each followed by a text input field. At the bottom, there is a "Back" button, a "Next >" button, and a "Cancel" button. The "InstallShield" logo is in the bottom left corner.


- 9 Enter the ODBC information that will be used for connecting to the Document Production SQL Server database. If no information is entered, the Document Print FSISYS.INI file will need to be updated manually. Refer to Chapter 5: Required Post-Installation Steps for additional information. Click **Next**.

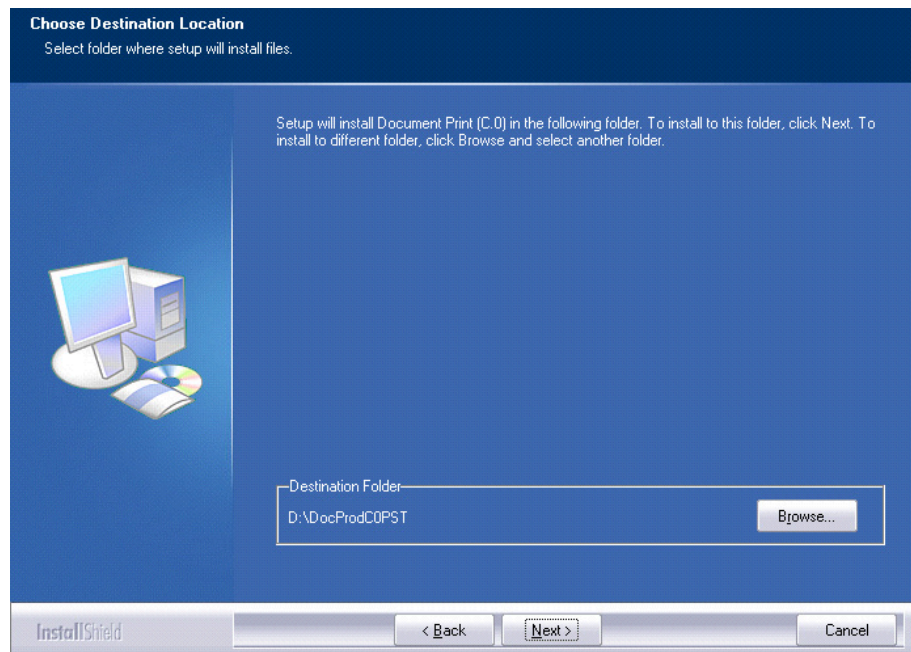

- 10 Click **Browse** and select the path where Document Production (C.0) was installed. For example, if Document Production (C.0) was installed in D:\DocProdC0QA then browse to this folder. Click **Next**.

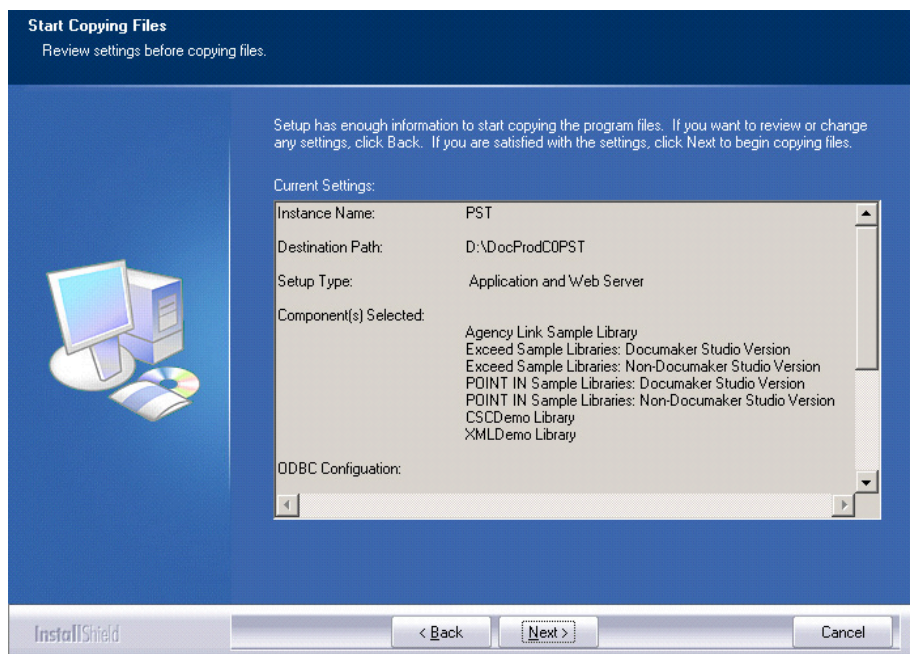

- 11 Review your settings and selections presented on this screen. Click **Back** to make changes or click **Next** to start the installation.

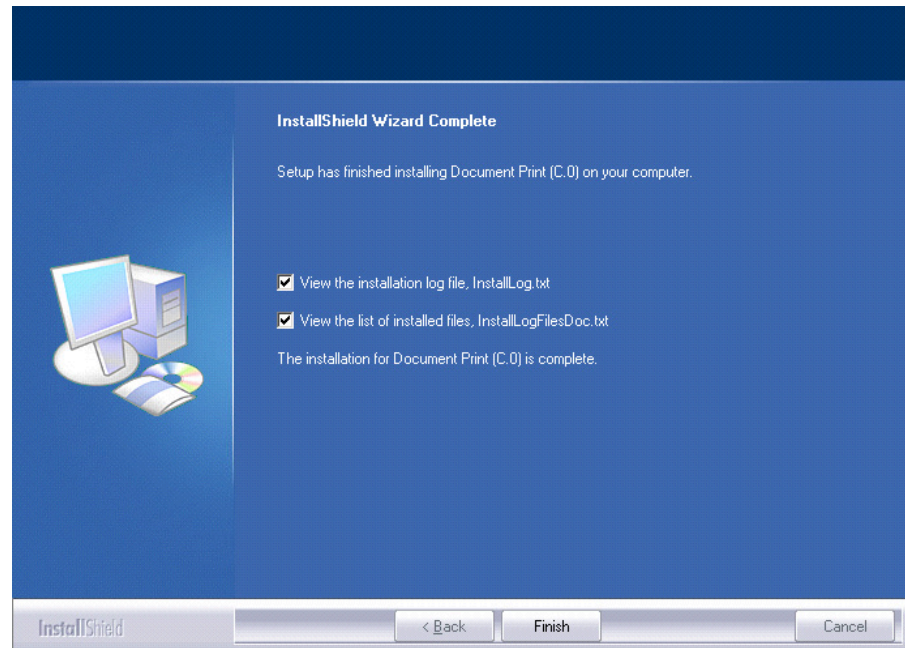


- 12 Click **Finish** to complete the installation.
- 13 Go to chapter 5 for required post-installation steps.

Install Document Print (C.0) - 2 Servers Configuration


This section provides installation instruction on how to install Document Print as a two servers configuration. A two servers configuration means that the Web and application components of Document Print are installed on separate servers. The Web component is installed on the Web server and the application component is installed on the application server where Document Production (C.0) was installed. To install Document Print as a one server configuration, please see the previous section Install Document Print (C.0) - 1 Server Configuration.

Application Server Installation


- 1 Insert the DVD on the application server, and click **Install Product** from the Main Menu screen.

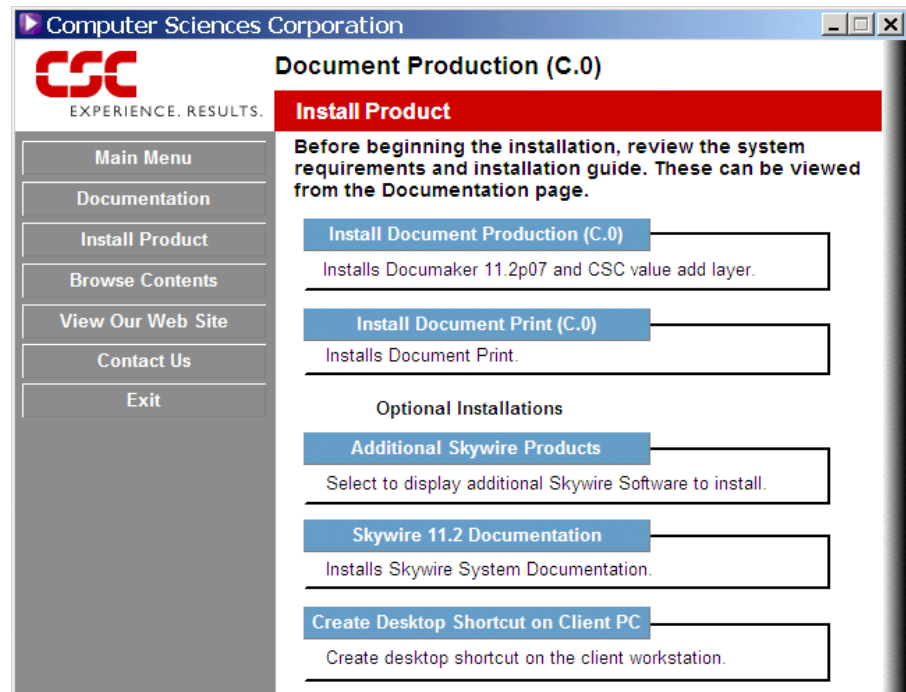


- 2 Click **Install Document Print (C.0)** to begin installation of Document Print.

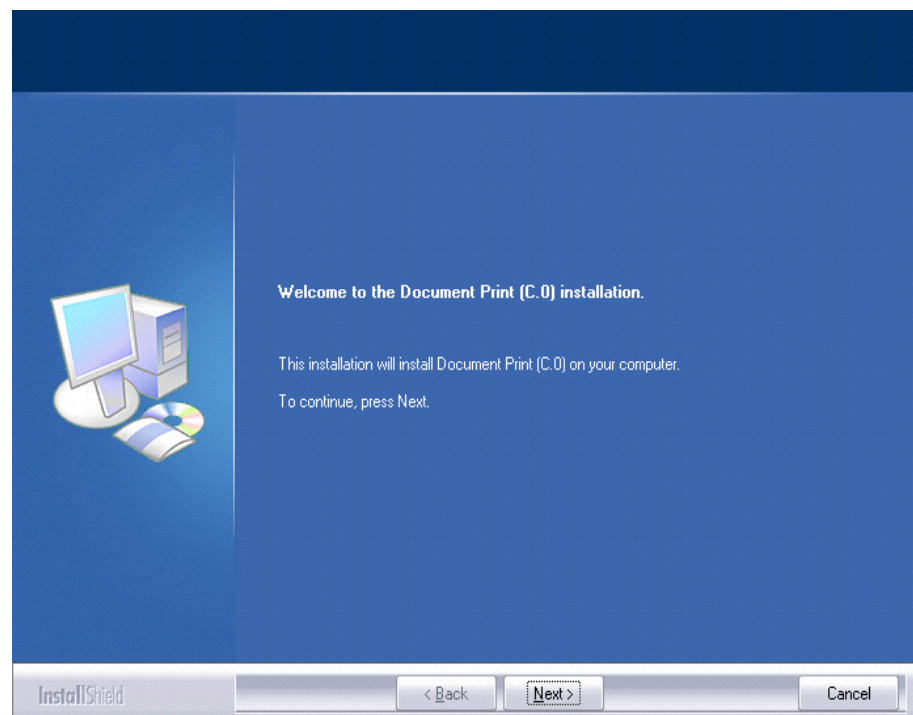


- 3 Click **Next**

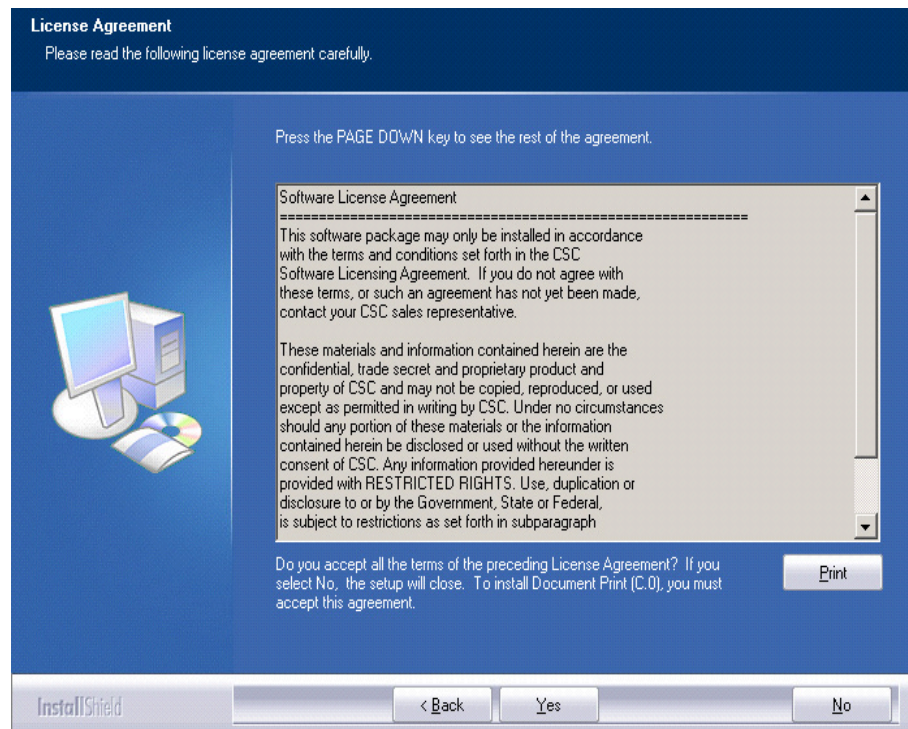


- 4 Please read the **Software License Agreement** carefully, and then click **Yes** to accept the licensing terms and conditions

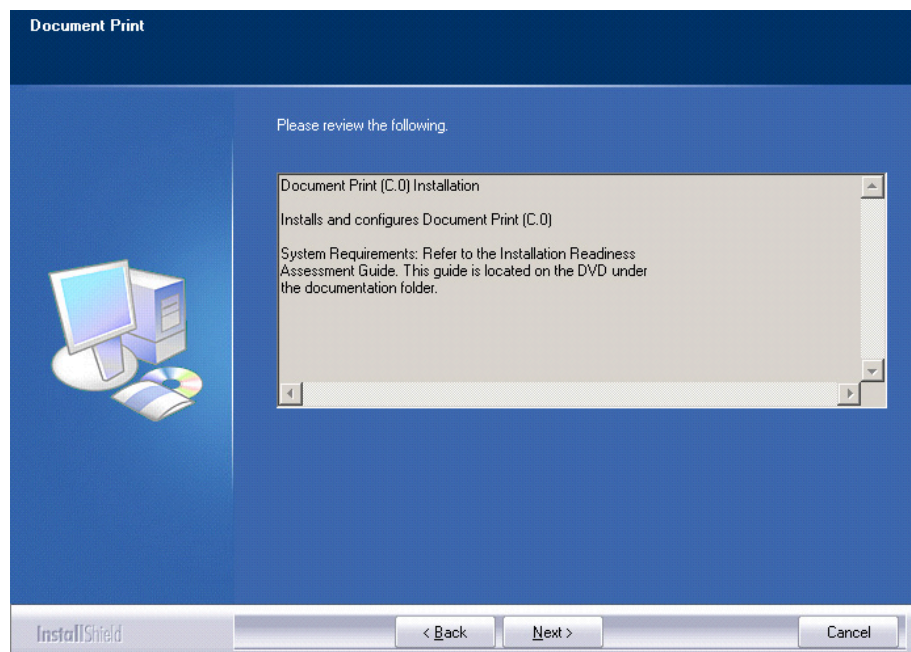


- 5 Click **Next**.

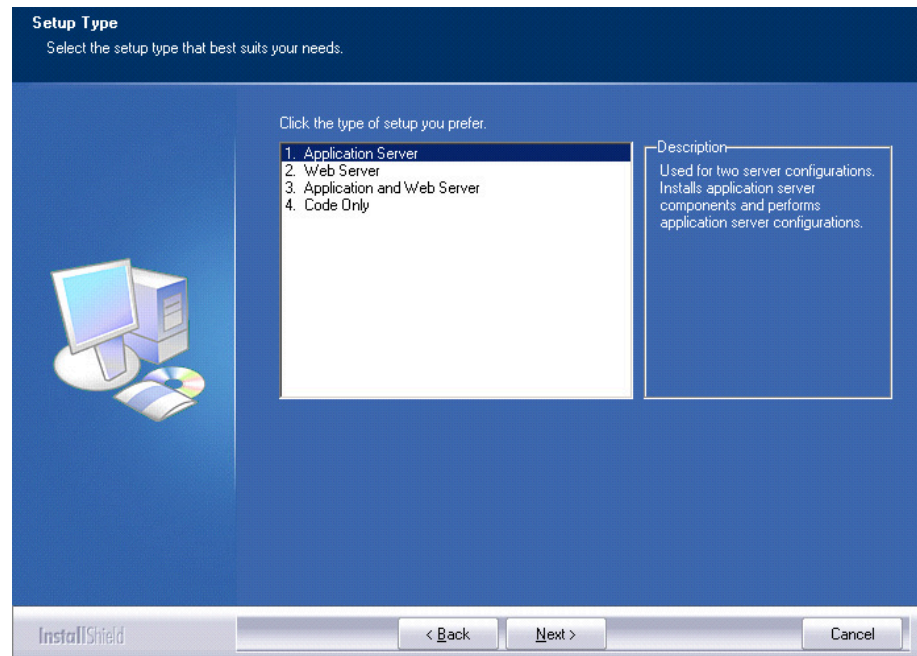

- 6 Select option one, **Application Server** and click **Next**. Option one installs the application server components for Document Print.

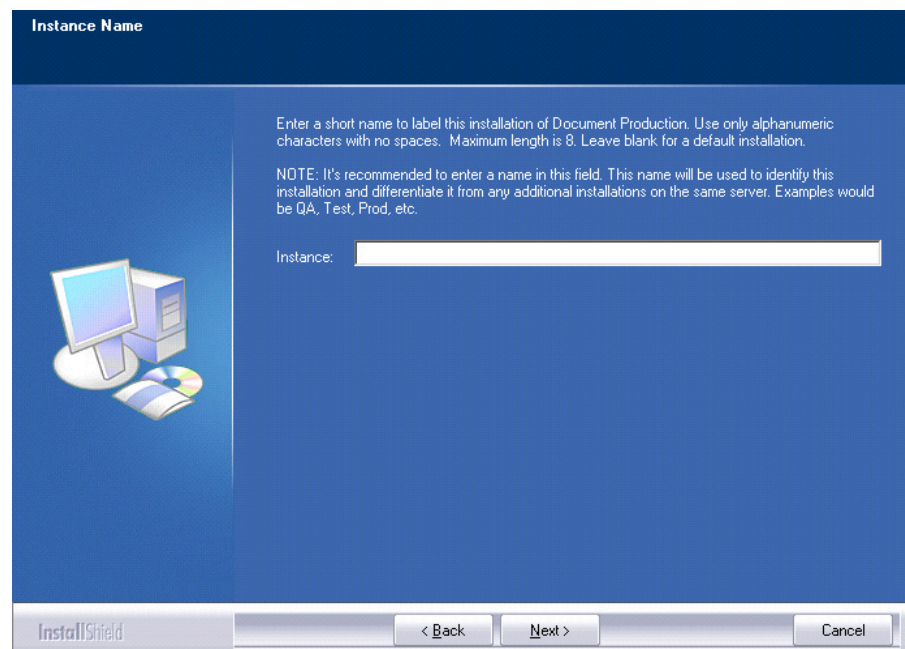


- 7 On the **Instance Name** page, enter a named instance for your installation or leave blank for a default name. A named instance labels this installation and it allows additional named instances to be installed side-by-side on the same server. Use only alphanumeric characters with no space. Maximum length is eight. Examples would be QA, TEST, PROD, etc. Click **Next**.

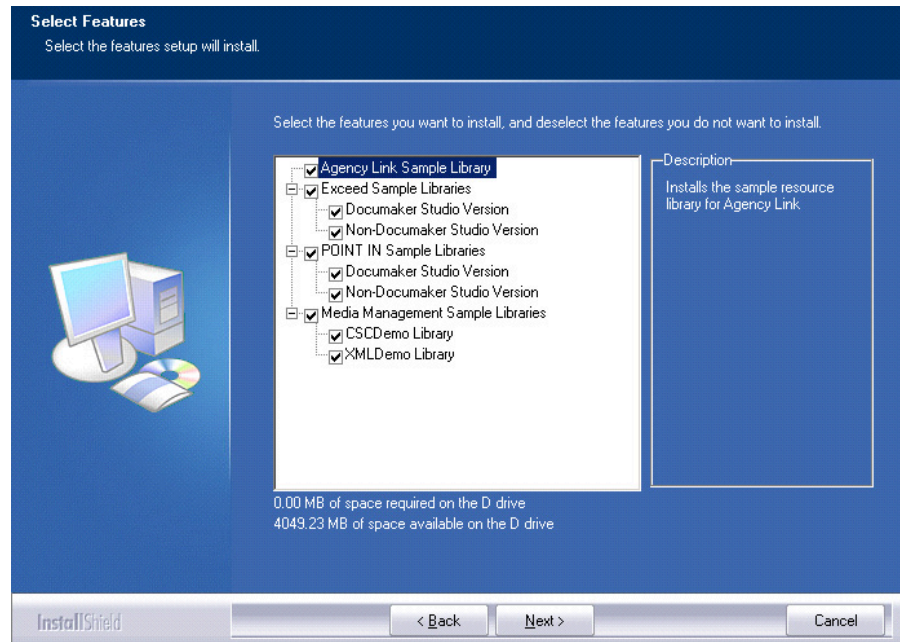


- 8 The **Select Feature** page allows you to select the sample resource libraries you want to install for Document Print. All components are selected by default. Clear the ones you don't want to install. Click **Next**.

Note: If you are installing Media Management (C.0), you will need to install the Media Management Sample Libraries because it is required to test the installation of Media Management.

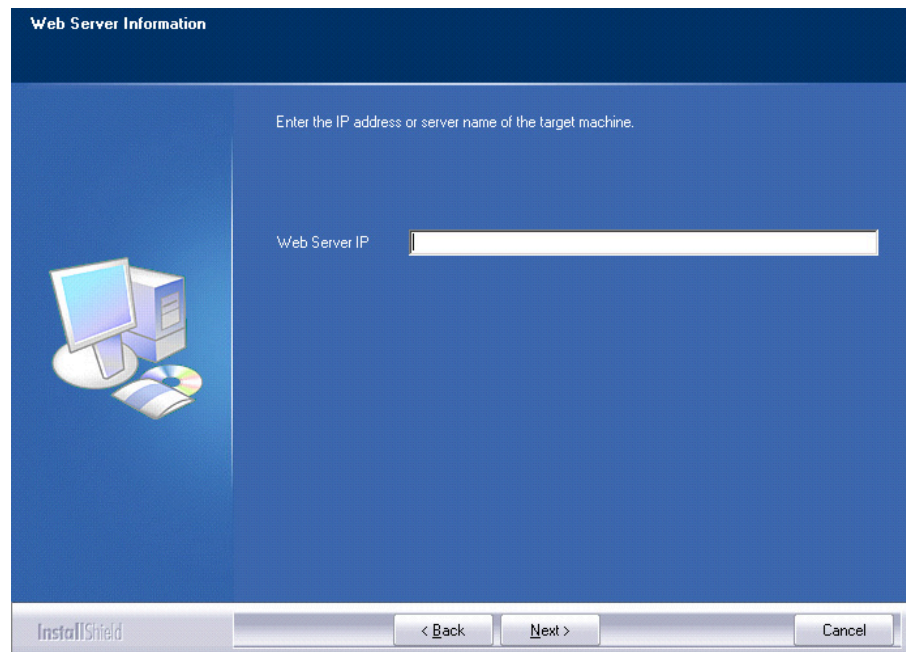

The dialog box is titled "Web Server Information". It has a blue background with a dark blue header. On the left side, there is an illustration of a computer monitor, a tower unit, and a CD/DVD. The main area contains the text "Enter the IP address or server name of the target machine." followed by a text input field labeled "Web Server IP". At the bottom, there is a grey bar with the "InstallShield" logo on the left and three buttons: "< Back", "Next >", and "Cancel".


- 9 Enter the IP address or server name of the **Web server** . This is needed by the installation to update some settings in the INI file. Click **Next** .

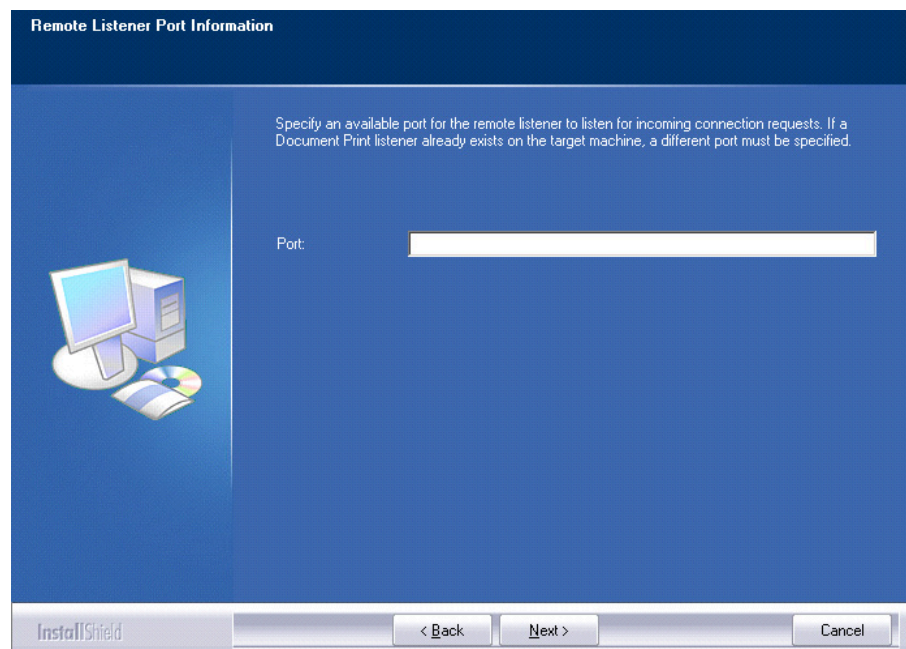

The dialog box is titled "Remote Listener Port Information". It has a blue background with a dark blue header. On the left side, there is an illustration of a computer monitor, a tower unit, and a CD/DVD. The main area contains the text "Specify an available port for the remote listener to listen for incoming connection requests. If a Document Print listener already exists on the target machine, a different port must be specified." followed by a text input field labeled "Port:". At the bottom, there is a grey bar with the "InstallShield" logo on the left and three buttons: "< Back", "Next >", and "Cancel".

- 10 Document Print uses a listener on the application server to listen on a specified port for any incoming connection requests from the Web server. Enter an available Port for the listener to listen on and click **Next**.

Note: If a listener already exists on the target machine, a different port must be specified.

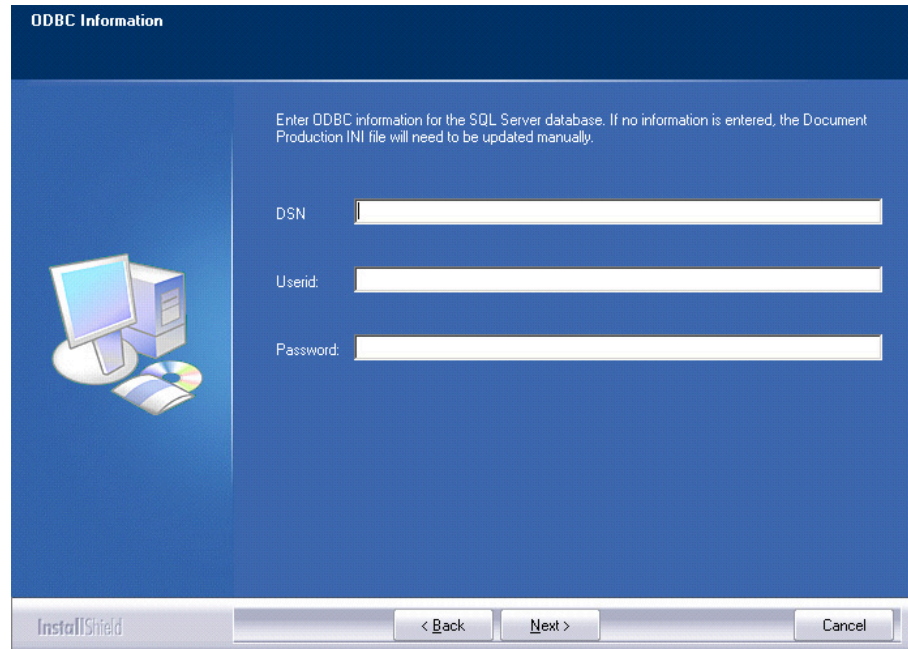The screenshot shows a window titled "ODBC Information" with a dark blue header. On the left is a graphic of a computer monitor, tower, and CD. The main area has a blue background with white text: "Enter ODBC information for the SQL Server database. If no information is entered, the Document Production INI file will need to be updated manually." Below this are three input fields labeled "DSN", "Userid:", and "Password:". At the bottom is a grey bar with the "InstallShield" logo, "< Back" button, "Next >" button, and "Cancel" button.

ODBC Information

Enter ODBC information for the SQL Server database. If no information is entered, the Document Production INI file will need to be updated manually.


DSN

Userid:


Password:

InstallShield < Back Next > Cancel


- 11 Enter the ODBC information that will be used for connecting to the Document Production SQL Server database. If no information is entered, the Document Print FSISYS.INI file will need to be updated manually. Refer to Chapter 5 “Required Post-Installation Steps” for additional information. Click **Next**.

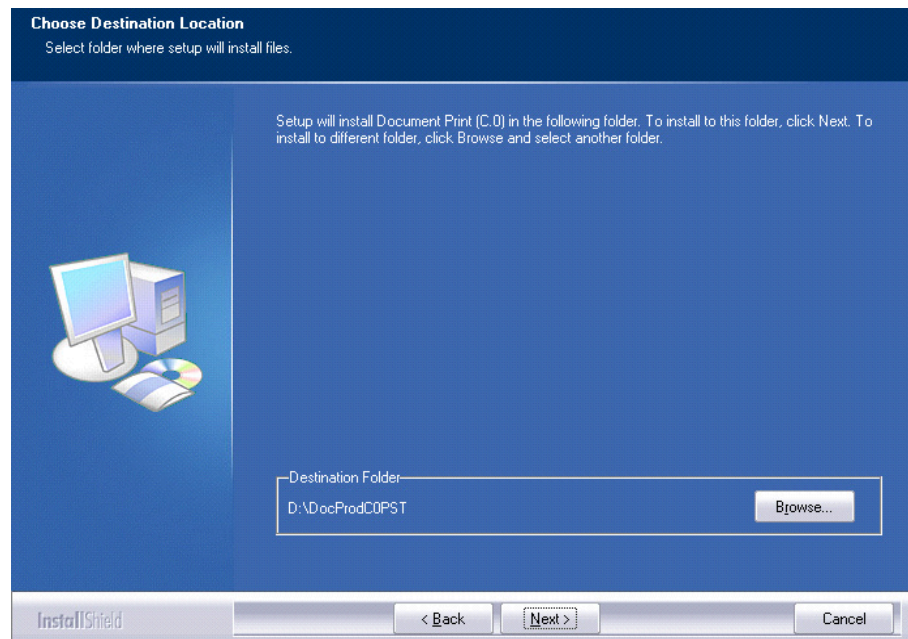

- 12** Click **Browse** and select the path where Document Production (C.0) was installed. For Example, if Document Production (C.0) was installed in D:\DocProdC0QA then browse to this folder. Click **Next**.

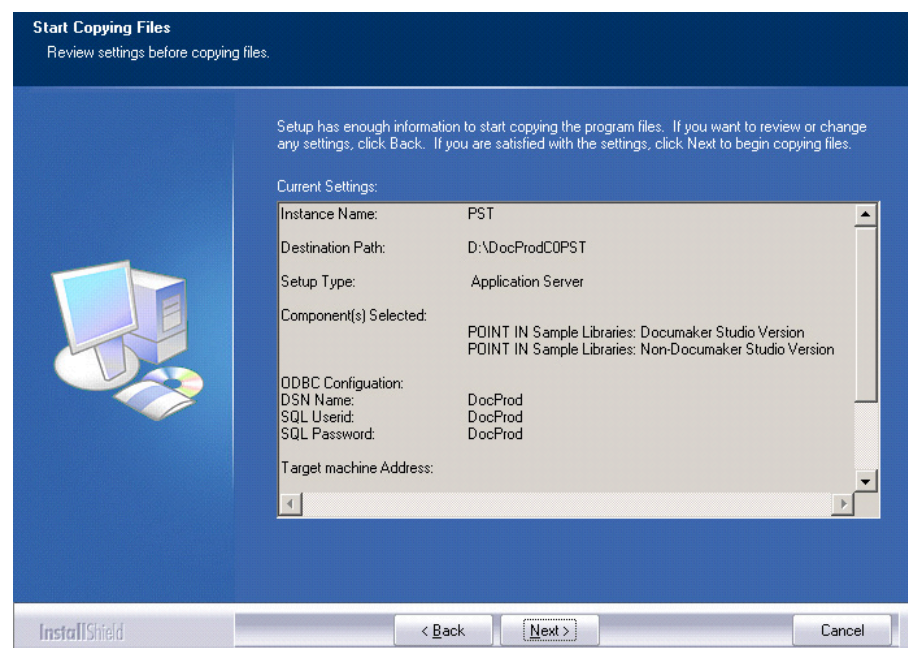


- 13** Review your settings and selections presented on this screen. Click **Back** to make changes or click **Next** to start the installation.

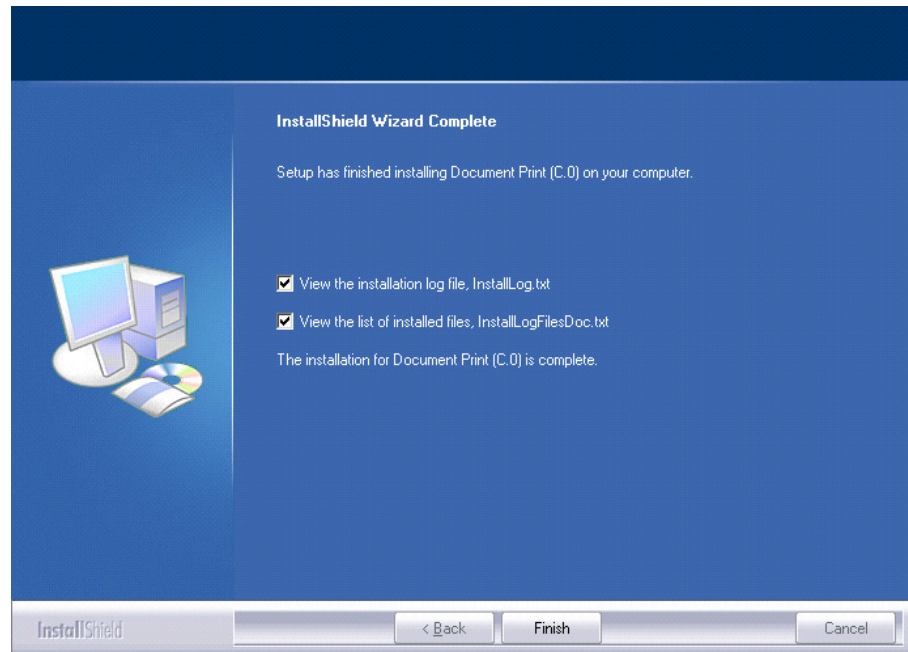


- 14** Click **Finish** to complete the installation.

Web Server Installation


- 1 Insert the DVD on the Web server and click **Install Product** from the Main Menu screen.

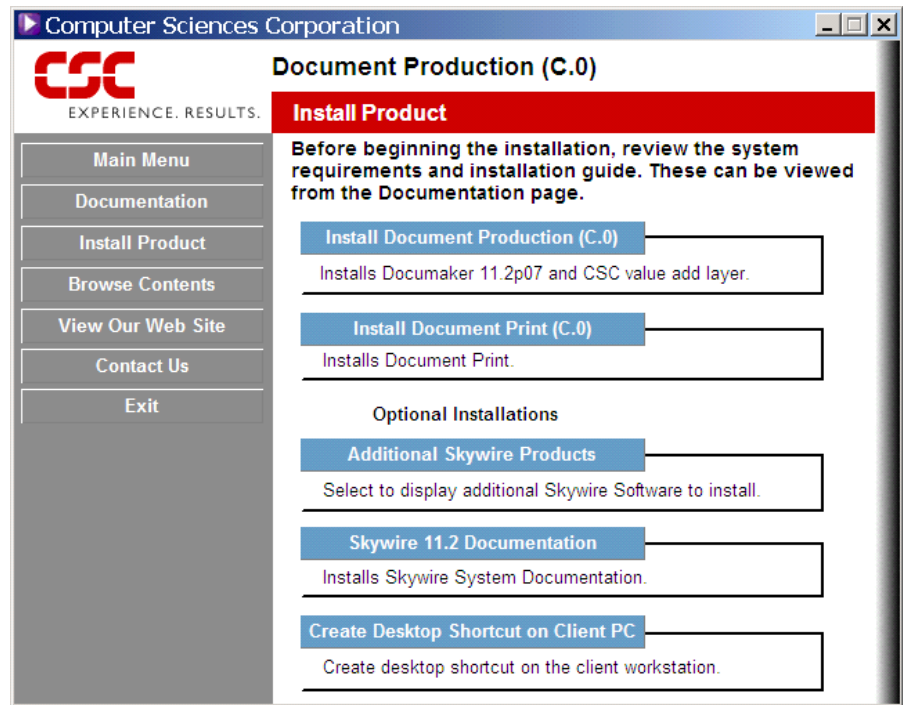


- 2 Click **Install Document Print (C.0)** to begin installation of Document Print.

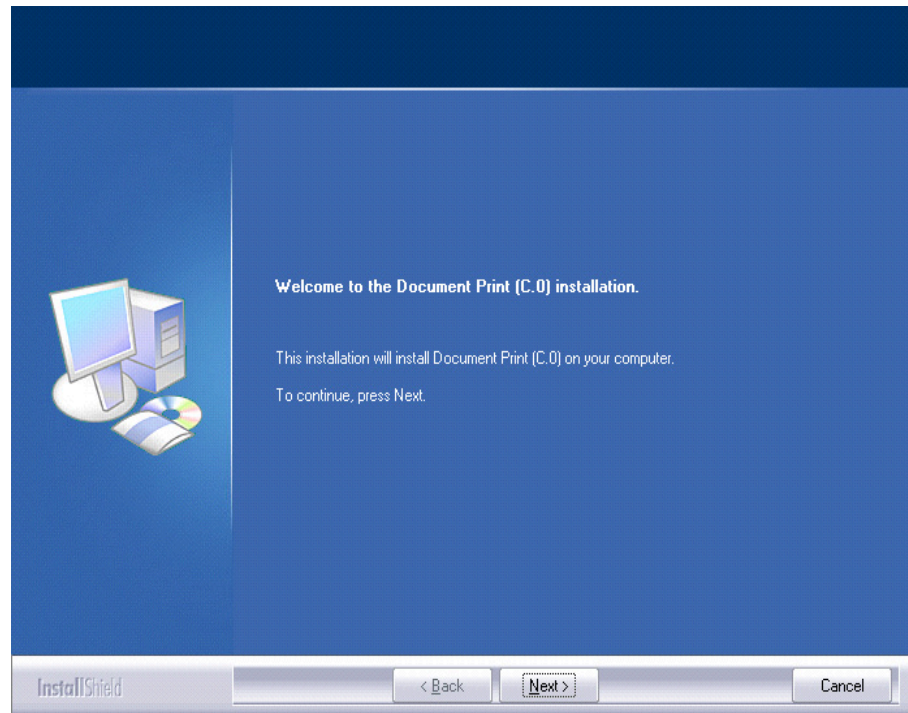


- 3 Click **Next**.

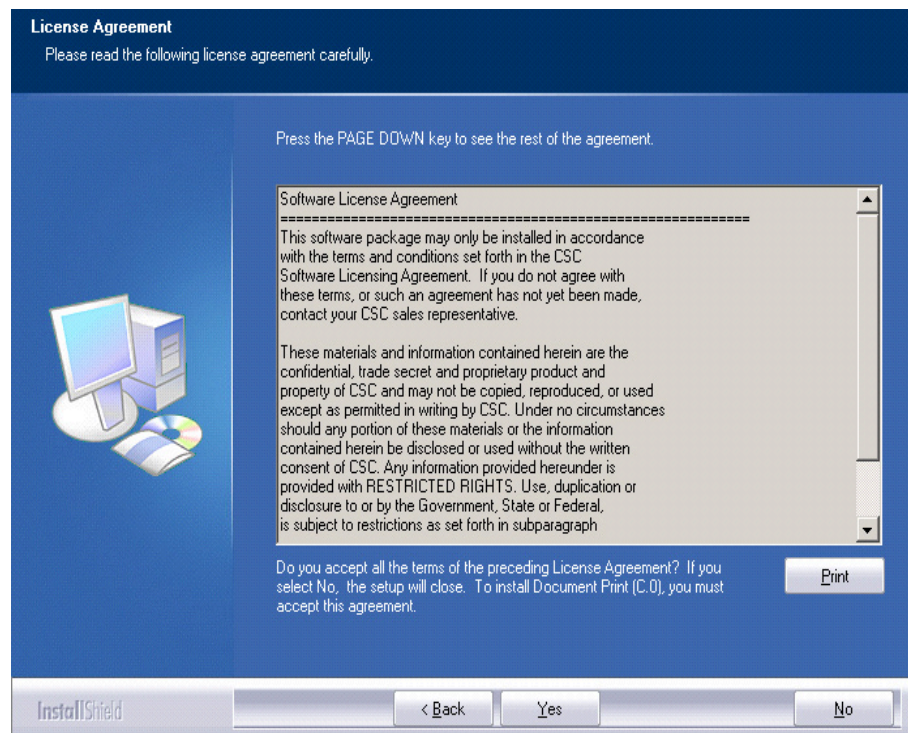


- 4 Please read the **Software License Agreement** carefully, and then click **Yes** to accept the licensing terms and conditions.

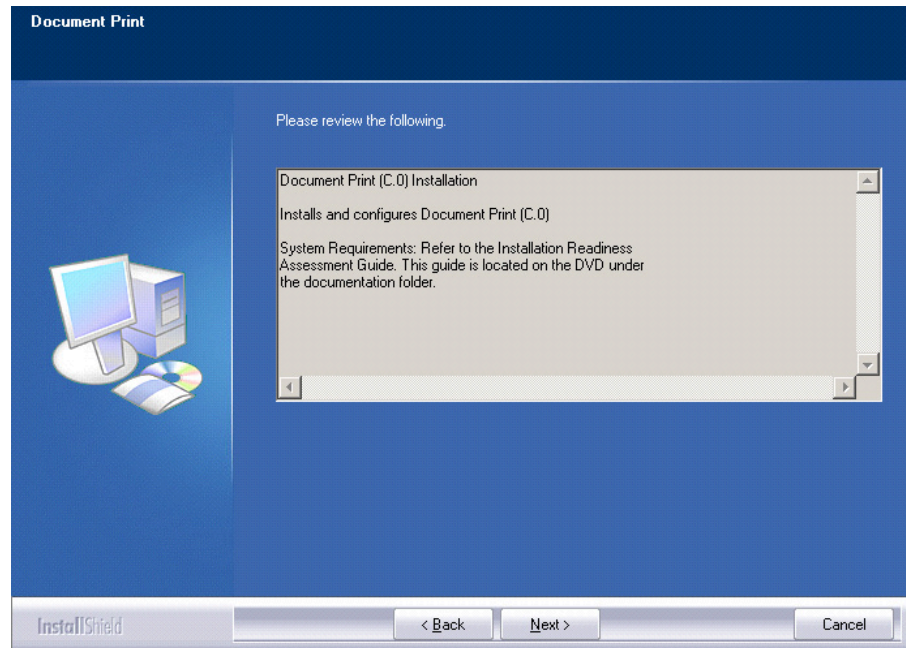


5 Click **Next**.

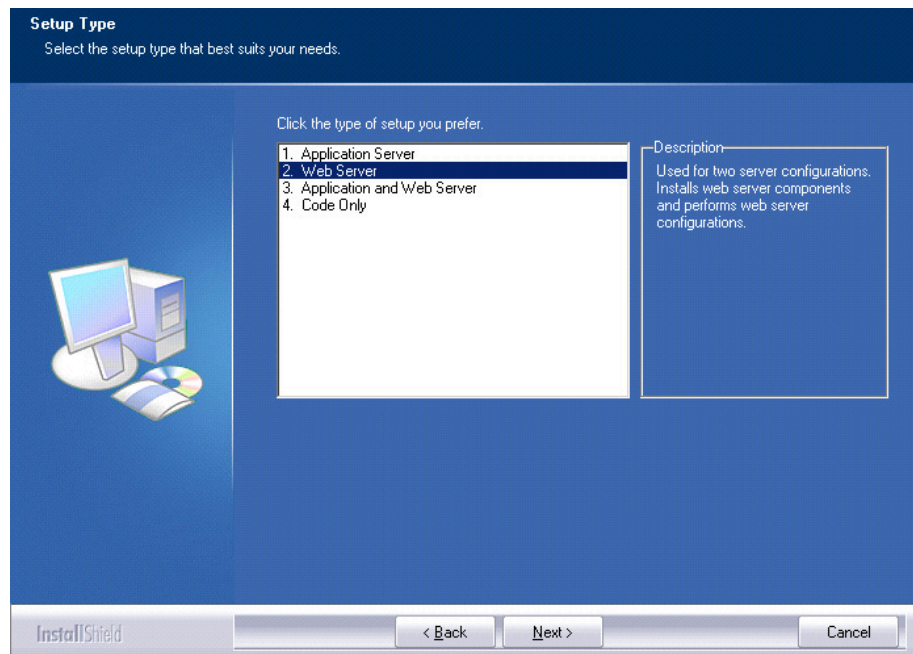

6 Select option two, **Web Server** and click **Next**. Option two installs the Web server components for Document Print.

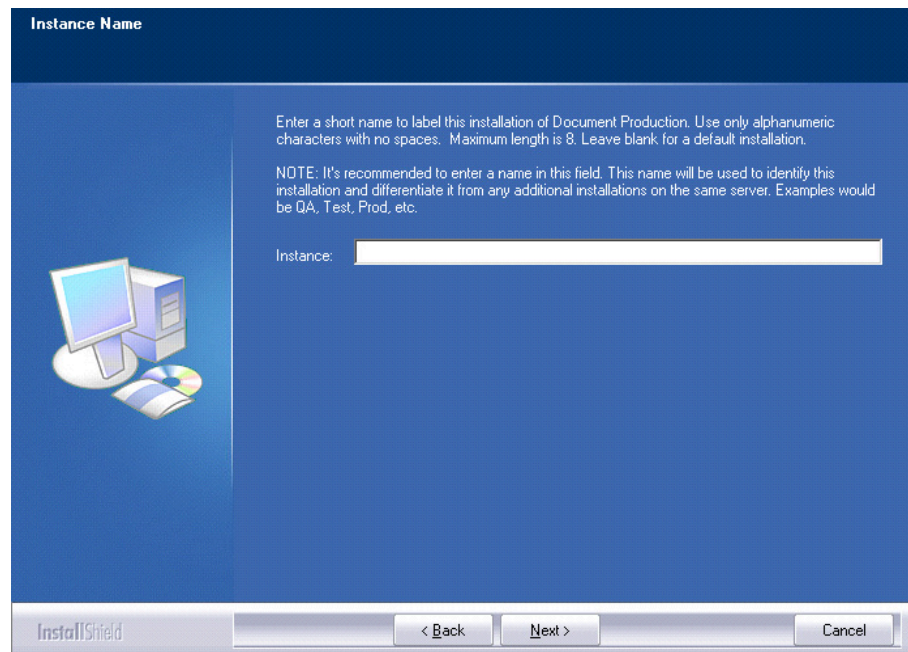


- 7 On the **Instance Name** page, enter a named instance for your installation or leave blank for a default name. A named instance labels this installation and it allows additional named instances to be installed side-by-side on the same server. Use only alpha-numeric characters with no space. Maximum length is eight. Examples would be QA, TEST, PROD, etc. Click **Next**.

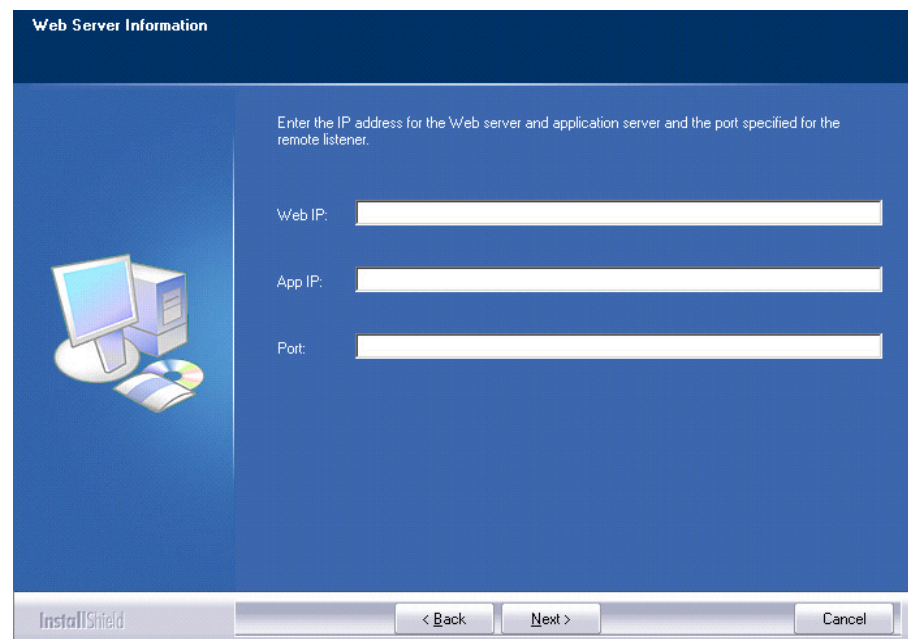


- 8 Enter the IP address or server name for the Web and application servers in the appropriate entry box. Also, enter the port the


remote listener is listening on. The port is the value you entered when installing the application server components. Click **Next**.

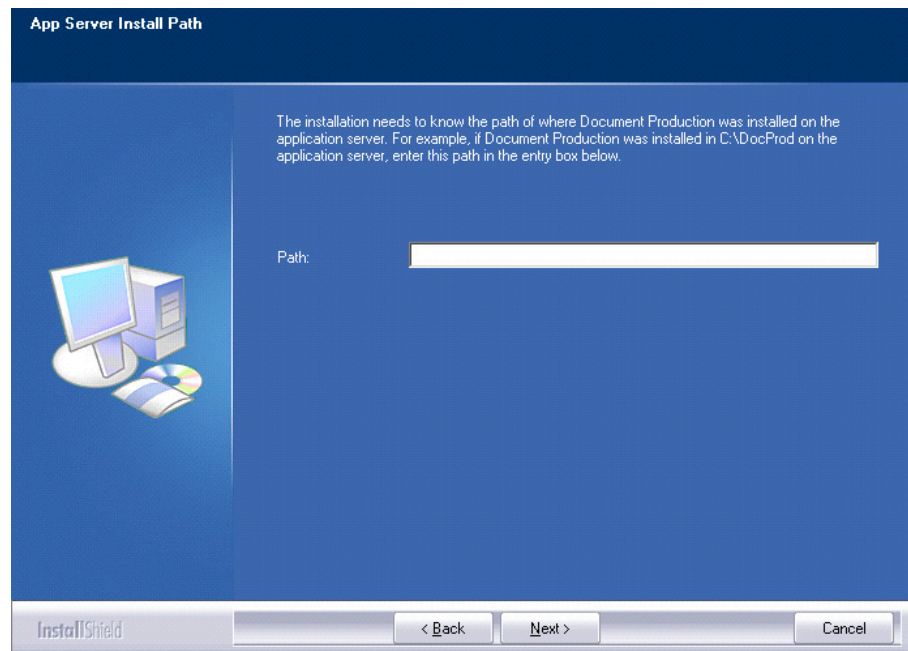


- 9 Enter the path where Document Production was installed on the application server. For example, if Document Production was installed in D:\DocProd, then enter this path. Click **Next**.

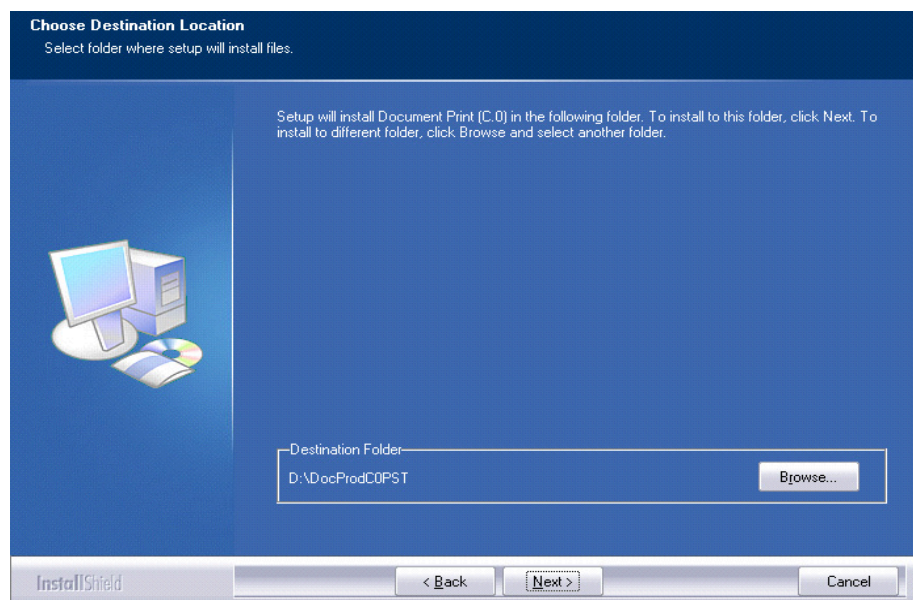

- 10 The default folder name is DocProdC0 plus the instance name. Click **Next** to accept the default path, or click **Browse** to select the path for the installation and then click **Next**.

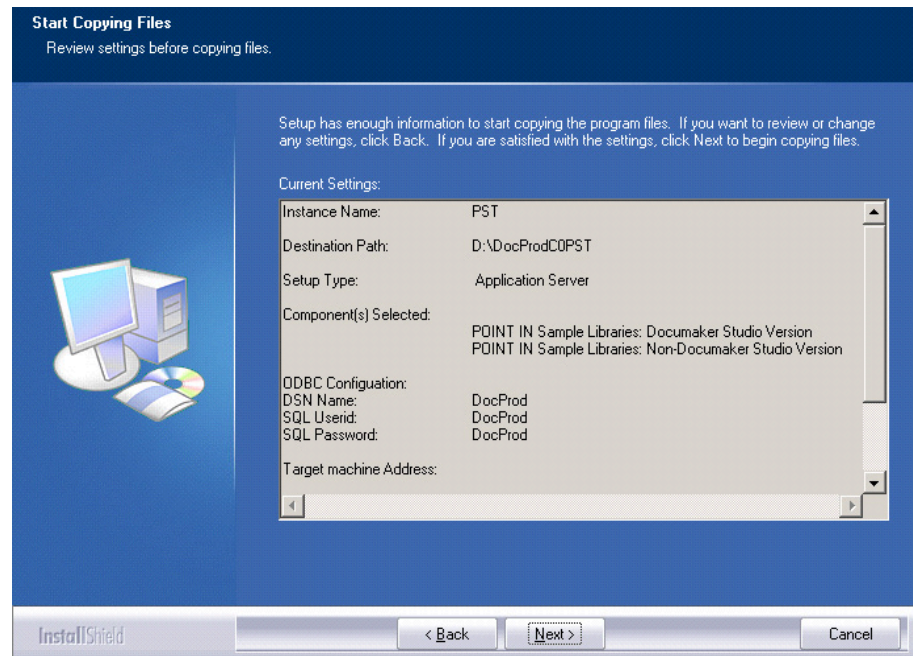

- 11 Review your settings and selections presented on this screen. Click **Back** to make changes or click **Next** to start the installation.

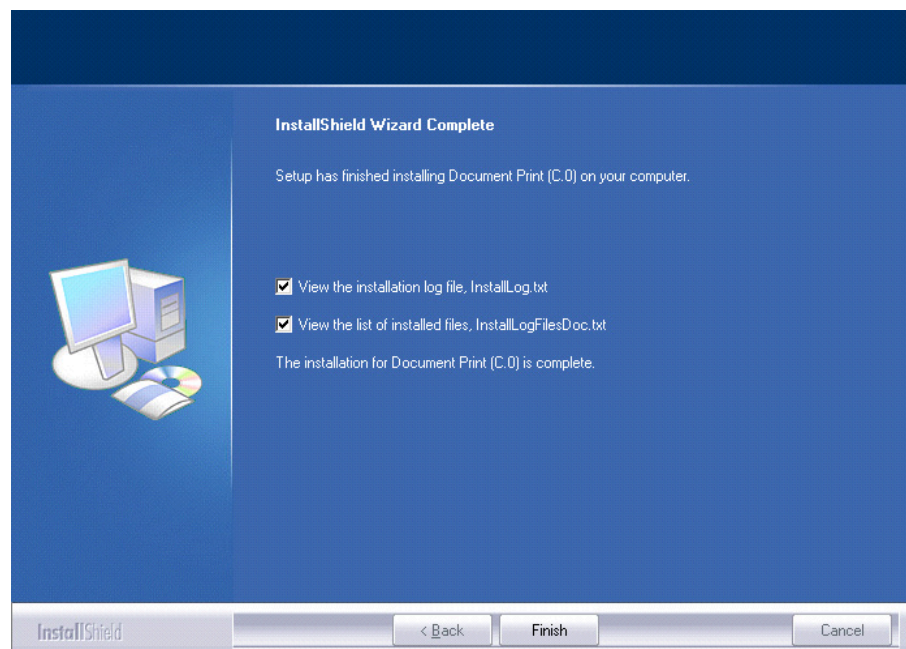

- 12 Click **Finish** to complete the installation.
- 13 Go to Chapter 5 for required post-installation steps.

Install Additional Skywire Products—Optional

The installation of Documaker (RP) is now included with the Document Production (C.0) installation. If you want to install a base version of Documaker (RP), without CSC value add, specify a target path different from the one specified for Document Production (C.0).

To install a separate base Skywire system without the CSC Value Add, click the "Install Documaker (RP)" link. The installation steps are self-explanatory.

Docucorp Version 11.2 Software

Install [Documaker \(RP\)](#)

Note: You do not need to install Documaker (RP) because it is included with the Document Production (C.0) installation. If you want to install a base version of Documaker (RP), without CSC value add, specify a target path different from the one specified for Document Production (C.0).

Install [Common Objects](#)

Install [Control Panel](#)

Install [Printcommander](#)

Install [Tagcommander](#)

Install [Fontcommander](#)

Install [Transall Lite](#)

Install [Documanager 6.4 SR2](#)

Install [Docusave Server 2.0](#)

Sample Master Resource Libraries:

[A4sampco](#)

[HPINT](#)

[RPEX1](#)

[Sampco](#)

[Sampco Canadian French](#)

[UTEX1](#)

The other components listed on the Skywire Products screen are optional.


You can find information for installing these products by clicking the Documaker Product Documentation button on the Documentation screen. Click the link for the product you are installing.

For Installing...	Click the link for...
Common Objects	Installation and Reference Guide: Common Objects
Control Panel	Installation and Reference Guide: Control Panel
PrintCommander	Installation and Reference Guide: PrintCommander/NT
TagCommander	Reference Guide: TagCommander
Transall Lite	Reference Guide: TransAll
Documanage 6.4	Documanage 6.4 Documentation

Install Skywire 11.2 Documentation

You can install Skywire's documentation on your hard drive or you can access it from the DVD.

To install Skywire's documentation on your machine, click **Skywire 11.2 Documentation**. When asked for the destination location, browse to where **Document Production (C.0)** was installed and click **Next**. The installation screens that follow are standard and self-explanatory.

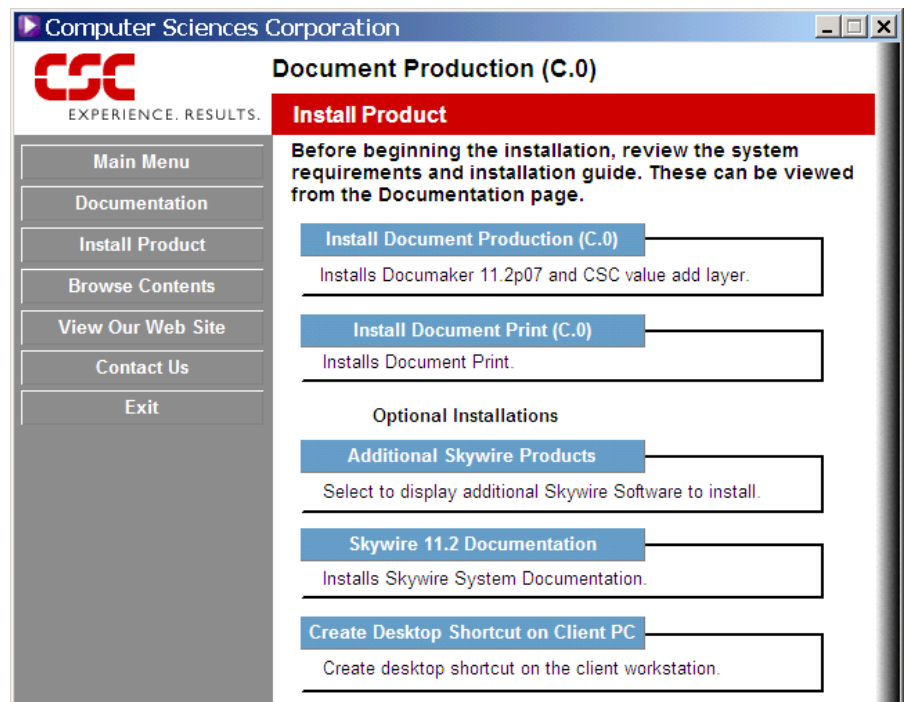


Create Desktop Shortcuts on Client PC

This installation will create a desktop folder, containing shortcuts, on the client machine for each CSC's sample resource library that was installed during the installation of Document Production.

Prior to creating the desktop folder(s) on the client machine, you will need to map a drive letter to the server and shared folder where Document Production was installed. For example, if you installed Document Production on **Server1** under the shared folder **DocProd**, map a drive letter to \\Server1\DocProd.

- 1 Insert the DVD on the machine you want to create the desktop folder. Click **Install Product** from the **Main Menu** screen.

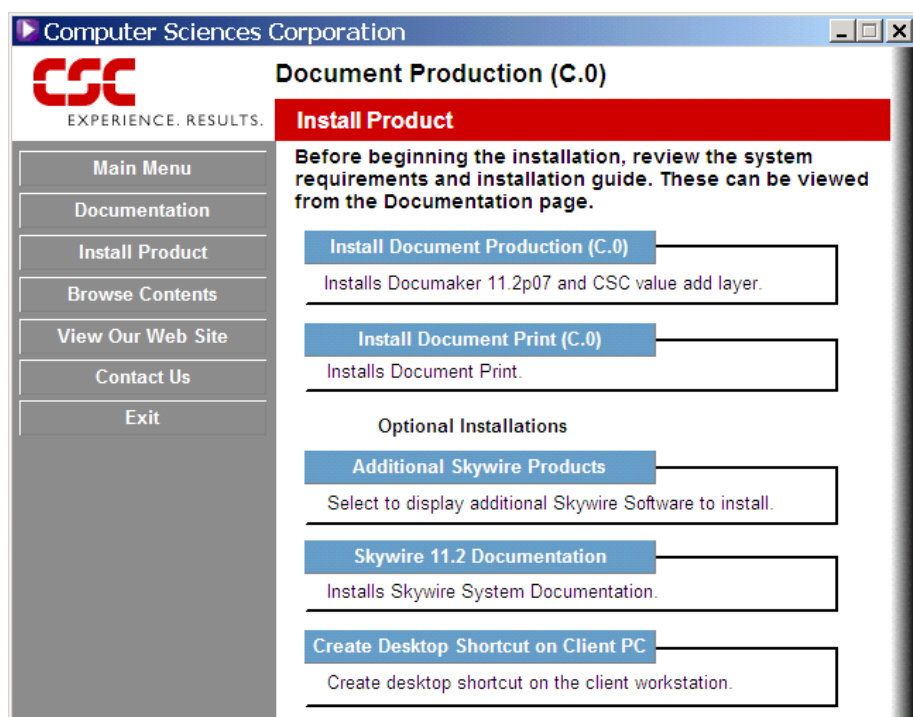

- 2 Click **Create Desktop Shortcut on Client PC**. When asked for the destination location, browse to the location where Document Production was installed and click **Next**. The installation screens that follow are standard and self-explanatory.

Chapter 5: Required Post-Installation Steps


To complete your installation, you must manually configure Document Production to use an ODBC-compliant database, such as SQL Server, to house the WIP and Archive tables. This section will provide the following required steps to:

- Create SQL Server Database
- Create ODBC Connection
- Configure INI Files
- Set Primary Key in CATALOG Table


Create SQL Server Database

To create a SQL Server database, follow the steps given below from the server where your database will reside.


- 1 Open SQL Server Management Studio.

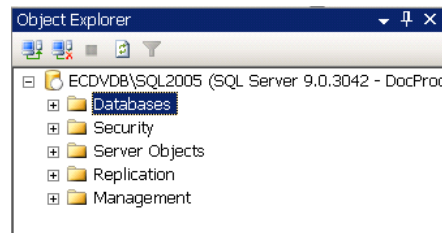


- 2 Right click on the **Databases** folder and select **New Database**.

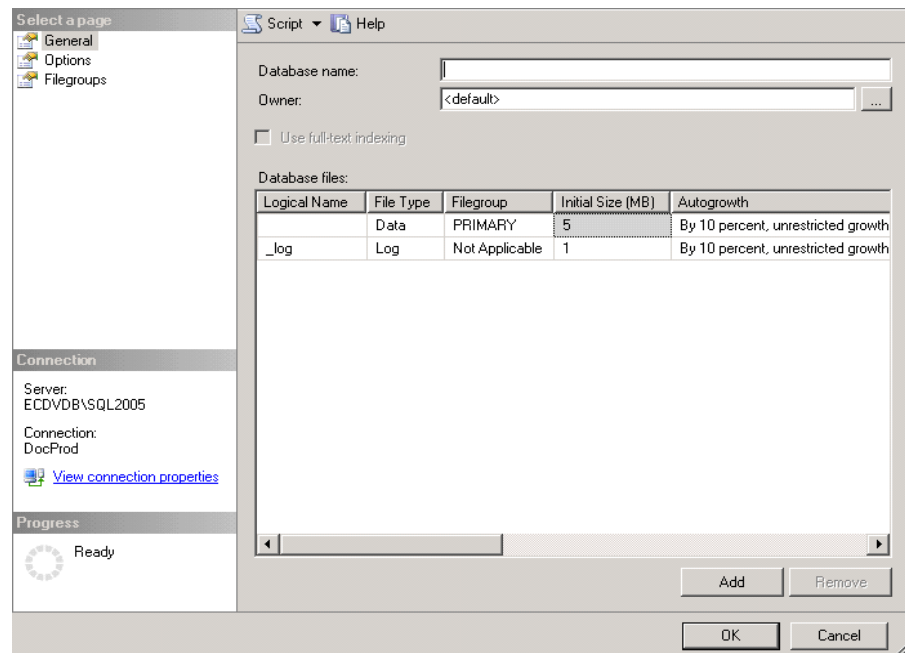


- 3 Enter a name for the database (for example, DocProd). Click **OK**

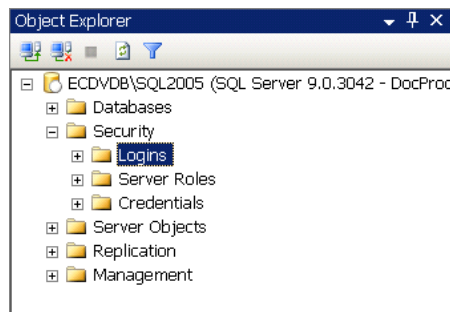

- 4 Create a new login for the database by right clicking the **Security** folder. Select **New Logins**.

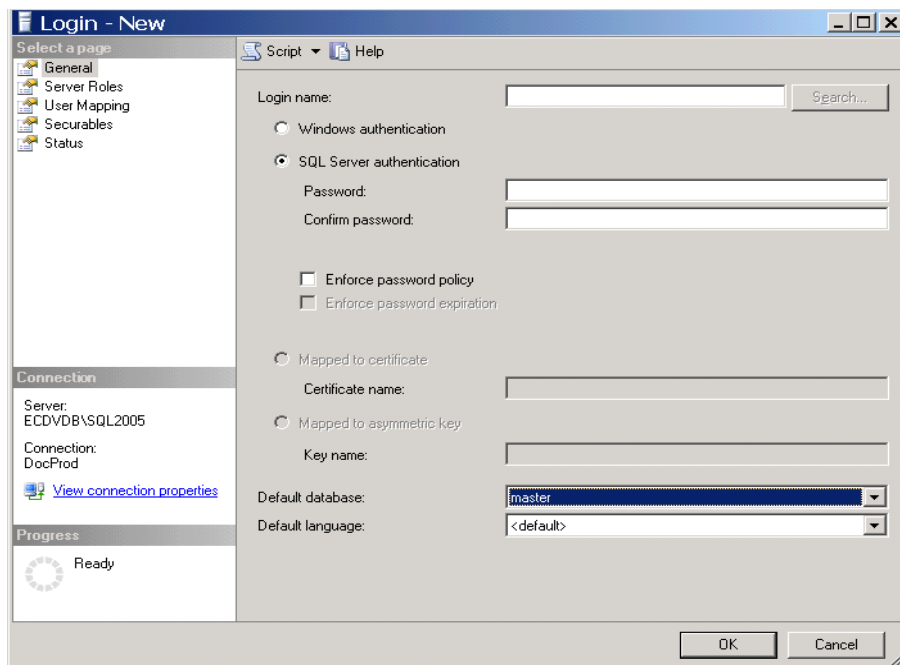

- 5 Enter a login name. Set login for **SQL Server authentication** and enter a **Password**. Select the **Database** (for example, DocProd) from the selection box.

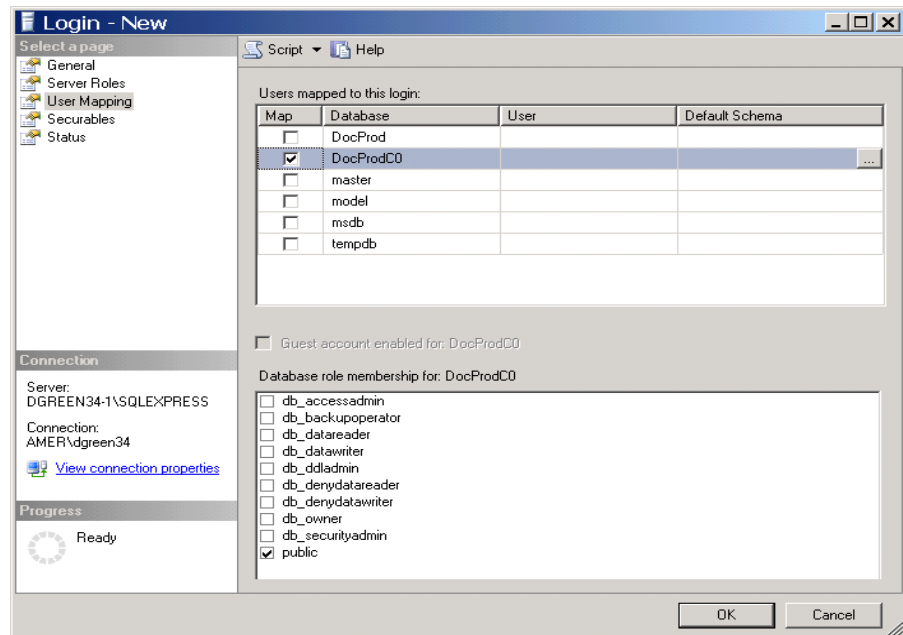


- 6 On the **User Mapping screen** , select your database (for example, DocProd) from the database list and select **public** and **db_owner** for the database role membership.
- 7 Click **OK** and confirm password to complete the process.


Create ODBC Connection

Once the database has been created, an ODBC connection will need to be created between the application server where Document Production was installed and the database server where the database resides. From your Document Production application server, follow the steps listed below:


- 1 Select **Start > Programs > Administrative Tools > Data Source (ODBC)**

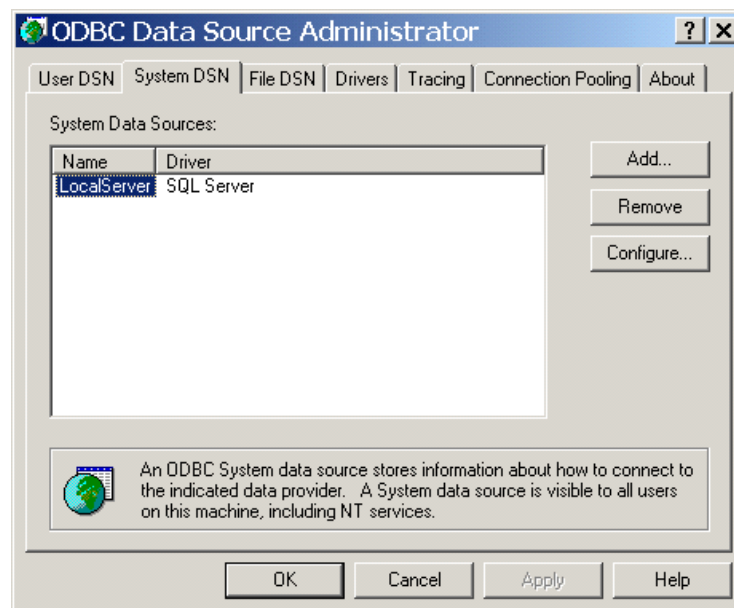


- 2 On the **System DSN** tab, click **Add**.

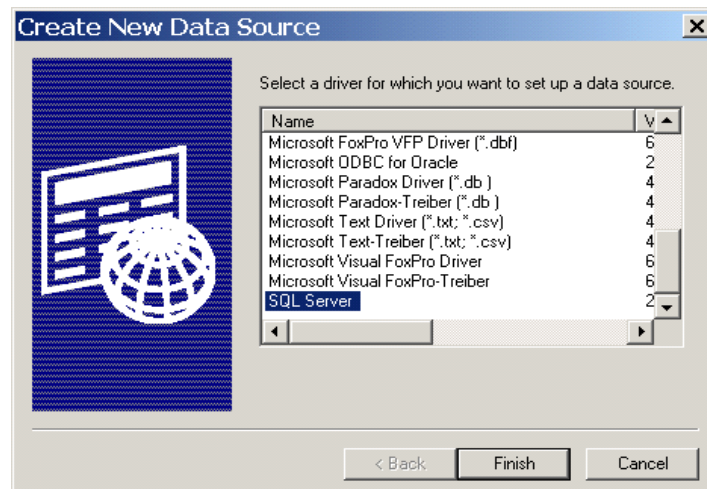

- 3 Select **SQL Server** from the selection box, and click **Finish**.

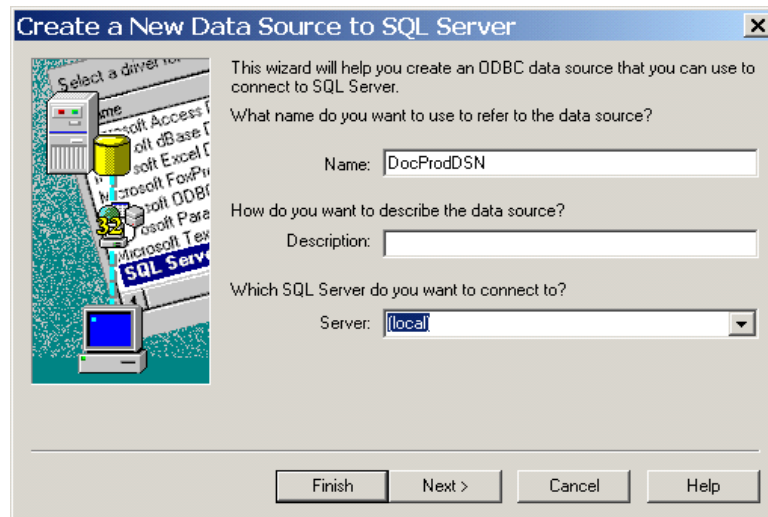


- 4 Enter a data source name and select which SQL Server to connect to. Click **Next**.

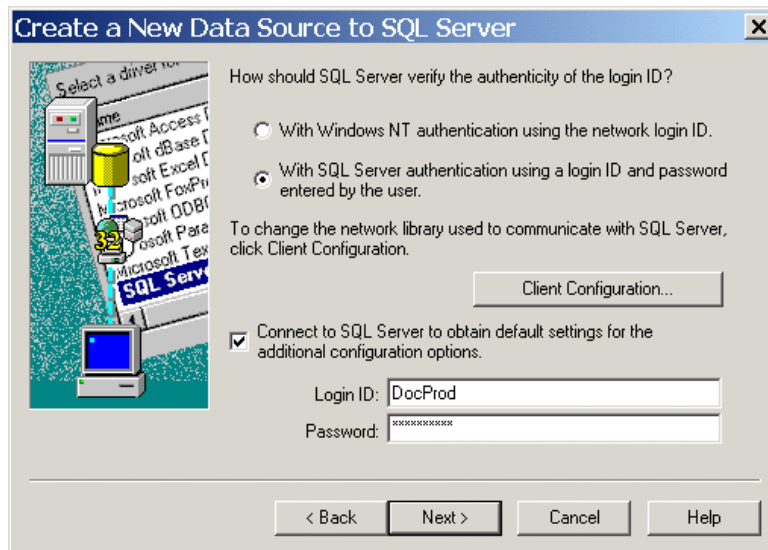


- 5 Select SQL Server authentication and provide the appropriate ID and Password. Click **Next**.

Login

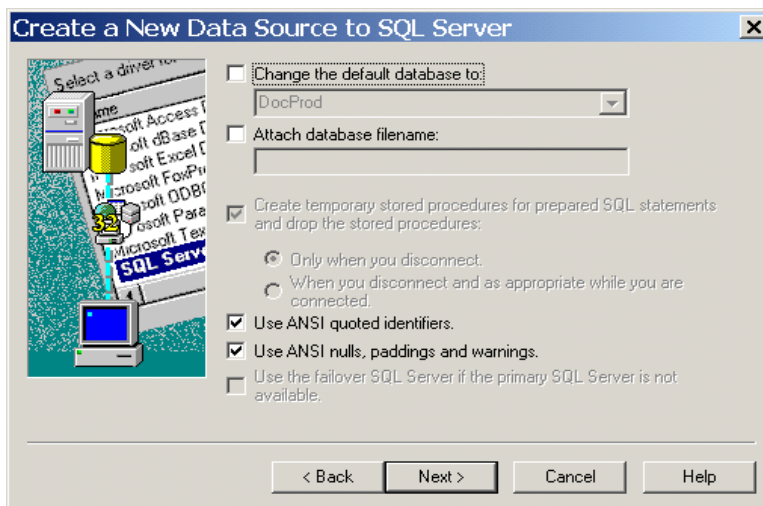

- 6 Make any necessary changes to the above screen and click **Next.**

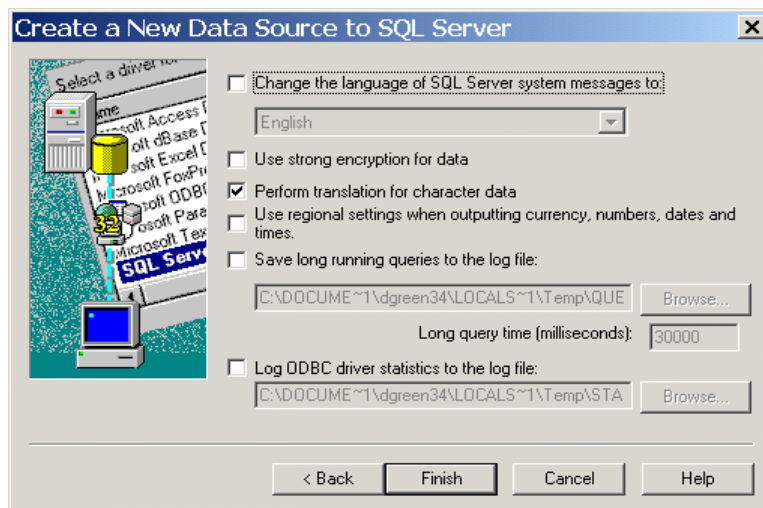

- 7 Make any necessary changes to the above screen and click **Finish.**

- 8 Test your ODBC connection.

Configure INI Files

Before you can send documents to SQL Server, the FSISYS.INI files for Document Print and the Document Production batch process must be configured properly. The base INI files that get installed comes already configured for SQL Server. The only thing needed is to provide the appropriate ODBC connection information created in the section [Create ODBC Connection](#)

- 1 Depending on which resource library you selected to install, you will need to update the following FSISYS.INI file(s), located on the application server, for Document Print:

```
<drive>:\<target>\Mstres\Docprint\POINT\FISISYS.INI
<drive>:\<target>\Mstres\Docprint\POINTDMS\FISISYS.INI
```

Open the FSISYS.INI file for each resource library and fill in the ODBC connection information for the settings under the <DBHANDLER:ODBC> group. Do not include the angle brackets (<>).

```
< DBHANDLER:ODBC >
    Server          = <ODBC Data Source Name>
```

Note: This is name of the DSN created in the ODBC Data Source Administrator.

```
;Qualifier          = <database name in the ODBC. Optional>
Connect              = Yes
CreateTable           = Yes
CreateIndex           = Yes
AlwaysSQLPrepare     = Yes
UserID                = <SQL Server authentication logon ID>
Passwd                = <SQL Server authentication logon password>
```

- 2 You will also need to update the following FSISYS.INI file(s), located on the application server, for the batch processing resource library:

```
<drive>:\<target>\Mstres\PNTBASE\FISISYS.INI
<drive>:\<target>\Mstres\PNTBASEDMS\FISISYS.INI
```

Open the FSISYS.INI file for each batch resource library and update the same settings as described above.

Set Primary Key in CATALOG Table

You will need to set a primary key for the CATALOG table. However, you must first create the table by archiving a transaction.

Archiving a transaction for the first time will automatically create the table for you. This can be accomplished in 1 of 2 ways:


- 1 Archive a transaction using the Document Print Test page. See the section [Test Document Print Using POINT IN Sample Resource Library](#) on page 63 for more information.
- 2 Run the test install of Document Production. See the section [Test Document Production Using POINT IN Sample Resource Library](#) on page 59 for more information.

Once the archive tables are created, the CATALOGID field in the CATALOG table must be set as the primary key. Setting this field as the primary key will allow Document Print to run concurrent GENARCs.

Note: Table names are prefixed as POINT, POINTDMS, etc., followed by the name of the table. For example, POINTDMS_CATALOG is the Catalog table for the Documaker Studio version of the POINT IN resource library.

Steps to set primary key using SQL Server Enterprise Manager:

- 1 Select **Start > Programs > Administrative Tools > Enterprise Manager**.
- 2 Expand the name of the database under the folder Databases and click on **Tables**.

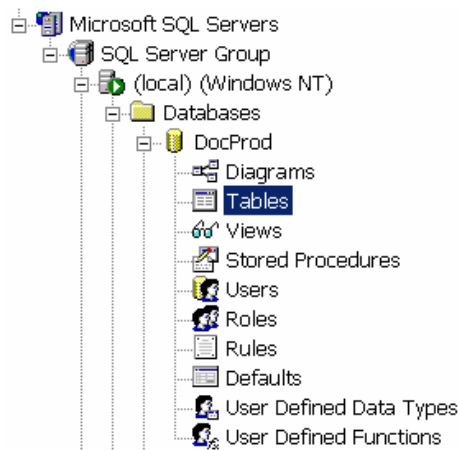

- 3 In the window on the right side, right click on the CATALOG table (for example, POINT_CATALOG).
- 4 Select **Design Table**.
- 5 Right click on the CATALOGID row and select **Set Primary Key**. A key icon should appear beside the column name.
- 6 Close window and click **Yes** to accept the change.
- 7 Repeat for the other Catalog table (for example, POINTDMS_CATALOG).

Chapter 6: Running Antivirus Software

Running antivirus protection on your server can have an affect on the performance of Document Print. If not configured properly, it can cause a process, launched by Document Print, to hang or take a long time to execute. This occurs when the antivirus, real-time scanning feature is on and is scanning a file produced by one process and does not allow another process to have access to it.

For example, GENDATA produces files that are needed by GENWIP. When the files are created by GENDATA, the antivirus software will start scanning the files. This causes a lock on the resources, which prevents access by GENWIP. As a result, GENWIP will hang or take a long time to execute.

If you are running antivirus software on your application server, you will need to exclude the following processes and/or directory from real-time scanning.

Processes	Directory
DPRTCALL.EXE GENTNW32.EXE GENDAW32.EXE GENWPW32.EXE GENACW32.EXE GENPTW32.EXE IAWCALL.EXE	Installation Path of Document Production For example, <drive>:\DocProd*. *

Chapter 7: Checking Your Installation

The installation DVD includes sample resource libraries for the POINT IN application. You can check your installation of Document Production by using the sample extract file provided with the resource library you installed. You can also check the installation of Document Print by using a test page that is provided.


Test Document Production Using POINT IN Sample Resource Library

For each POINT IN sample resource library installed, the installation will create a Document Production desktop folder, containing short-cuts, on the target machine. For example if the non Documaker Studio version was installed, a POINT Document Production desktop folder was created. For the Documaker Studio version, a POINTDMS Document Production desktop folder was created.

Note: *POINT and PNTBASE refers to the non Documaker Studio version. POINTDMS and PNTBASEDMS refers to the Documaker Studio version.*

The instruction steps given below apply to both the POINT and POINTDMS sample resource libraries.

- 1** Open the Document Production desktop folder and click the **Test Install** shortcut. This will run the Document Production batch system using a sample extract file that was created from the POINT IN system.
- 2** If Document Production ran successfully, the DOS window will close automatically.
- 3** If an error occurred, view the ErrFile.dat file, located in the Data folder under the PNTBASE or PNTBASEDMS resource library. For possible causes of errors, see [Troubleshooting](#) on page 65.
- 4** To view the forms in archive, click **2. View Documents** shortcut to display the window for the Document Production Archive and WIP system.

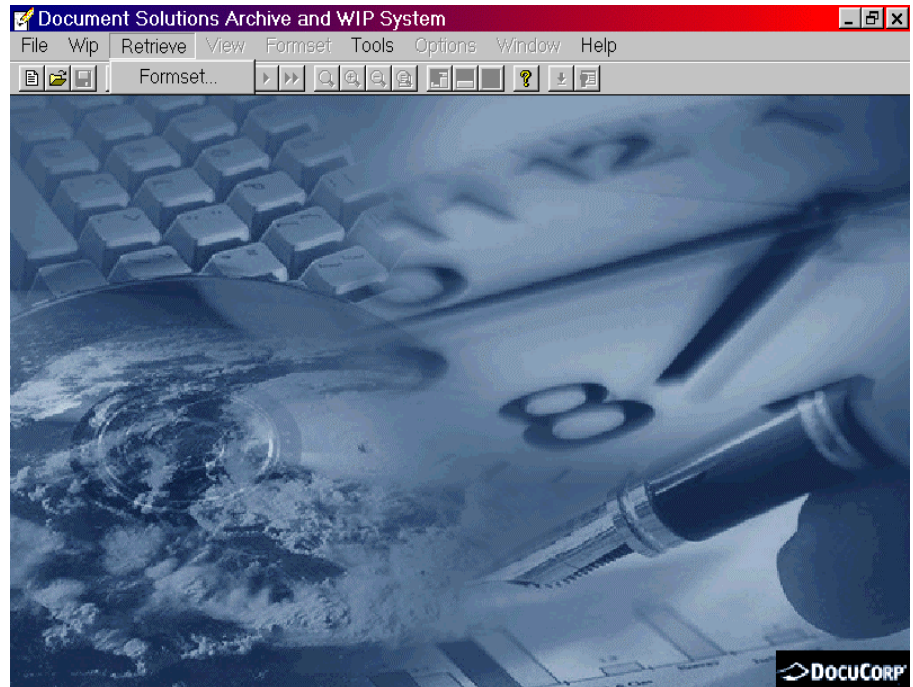

- 5 Click **Retrieve > Formset** from the toolbar.

Company Name	Line of Business	Sym/Pol/Mod	Run Date
			05/23/2003

Company Name	Line of Business	Policy ID	Run Date	Transac
--------------	------------------	-----------	----------	---------

- 6 From the Retrieve Document window, enter “CSC” for Company and click **OK**. This will display a list of all the forms.

Company Name	Line of Business	Sym/Pol/Mod	Run Date
csc			07/05/2006

Company Name	Line of Business	Policy ID	Run Date	Trans
CSC	ALL LINES	BOP000036300	02/02/2002	FD
CSC	PERSONAL AUTO	APV083105100	09/09/2005	FD
CSC	BUSINESS OWNERS	BOP000036300	02/02/2002	NB
CSC	CPP	ACV000000100	12/31/1999	BI
CSC	CPP	CF 000000600	06/20/2001	CN
CSC	CPP	ACV000000100	11/01/1999	NB
CSC	CPP	CPP000000100	11/01/1999	NB
CSC	CPP	CPP000000200	11/01/1999	NB
CSC	CPP	CF 000000100	06/20/2001	RI

OK Refresh Options Cancel Help

- 7 Select any entry and click **OK** to display the form.
- 8 To send all documents to your local printer, click the **2. Print Documents** shortcut in the POINT IN Document Production folder. Make sure the computer is configured to print to a local printer.

Test Document Print Using the Document Print Test Page

If you installed Document Print, the installation will install and configure a test page that you can use to test Document Print. The test page can test the calling of Document Print to make sure that Document Print was installed and configured correctly and to test the communication with Document Print using Web Service.

Test Document Print Using POINT IN Sample Resource Library


.....

The instruction steps given below apply to both the POINT and POINTDMS sample resource libraries.

Note: Before you can use the Document Print Test Page, the proper NTFS file system permissions must be set on certain folders. See the section [NTFS File System Permissions Required For Document Print](#) on page 71 in Appendix A for more information.

- 1 In the Document Production desktop folder, located on the target machine's desktop, click the **Document Print Test Page** shortcut.

This will display the Document Print Test Page in Internet Explorer.

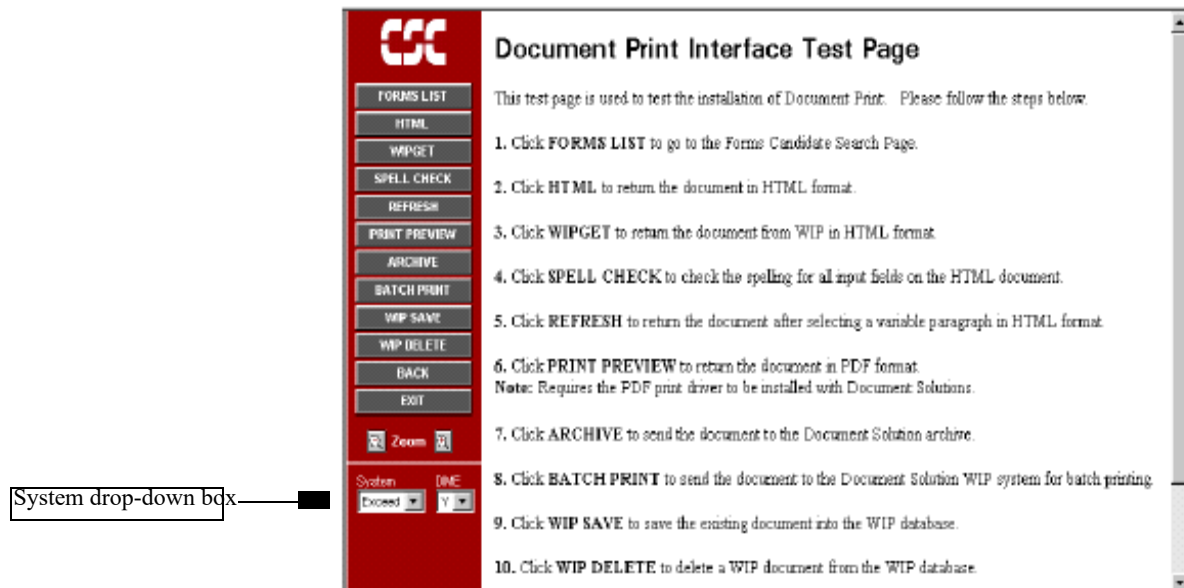

- 2 In the bottom left corner, select **POINT** or **POINTDMS** from the **System** drop-down box.
- 3 Click the **FORMS LIST** button to go to the Forms Candidate Search Page.
- 4 Enter **1,M-** (1 comma M dash) in the **Document Description** entry box and click the **SEARCH** button that is located on the right side of the page. This will take you to the Forms Candidate List Page.

- 5 Select **Request Additional Information** form from the Available Forms list and click the **HTML** button that is located on the left side of the page. This will render the document in HTML format.
- 6 Click the **PRINT PREVIEW** button to render the document in PDF format.

***Note:** The PRINT PREVIEW button requires the PDF print driver to be installed.*

- 7 Click the **ARCHIVE** button to archive the document or click the **BATCH PRINT** button to send the document to WIP.
- 8 Click the **FORMS LIST** button to take you back to the Forms Candidate Search page.
- 9 Close your browser.

Chapter 8: Troubleshooting

This section lists problems and describes possible causes/solutions.

Problem

When running Document Production, I get the following error message:

The name specified is not recognized as an internal or external command, operable program, or batch file.

Solution

The NT path variable was not updated with the installation path for Document Production.

Manually update the environment path variable by following the steps below:

For Windows NT:

- 1 Click **Start > Settings > Control Panel > System**.
- 2 On the Environment tab, click the **Path System Variable** and, to the end of the value field, enter the installation path plus “\dll.” For example, if you installed to C:\DocProd, you will enter C:\DocProd\Dll to the end of the current path (unless it was already there).
- 3 Click **Set > Apply > and OK**

For Windows 2000:

- 1 Click **Start > Settings > Control Panel > System**.
- 2 From the Advanced tab, click **Environment Variables**.
- 3 Under System Variables, double click **Path**.
- 4 Go to the end of the variable value field and enter the installation path plus “\dll.” For example, if you installed to C:\DocProd, you

will enter C:\DocProd\DII to the end of the current path (unless it was already there).

- 5 Click **Set** > **Apply** > and **OK**

Problem

Can't map a drive to the AS/400 Shared Folder.

Possible Cause

The netserver is running on the AS/400 but it needs to be configured to start the shared folders. You can find out if the netserver is running by typing NETSTAT *CNN on the AS/400. Look under the local port column for netbios. If you see netbios, then the netserver is running. Configure this to include QDLS.

Possible Cause

If your AS/400 operating system is RPS 5.1 or higher, you must use Client Access Express. Client Access 3.XX is no longer supported under RPS 5.1. Only versions 4.XX and 5.XX of Client Access Express are supported. If you are running Windows 95/98, the ability to map shared drives on the AS/400 is not feasible because of the way passwords are used. If the end user is running Windows 2000 or NT with Client Access Express, the ability to map drives will be available.

If your AS/400 operating system is prior to RPS 5.1, Client Access 3.XX can be used for Windows 95/98. Because there is no cost associated with the upgrade to Client Access Express, it is recommended that the upgrade be performed. However, it may prove to be a labor intensive effort.

Problem

Access denied when trying to copy files from the AS/400 shared folder (QDLS).

Solutions Checklist

You might need to change access rights to the shared folder.

These instructions are based on a Windows NT environment using Client Access Express and should be performed by a system administrator or QSECOFR.

- 1 Start IBM AS/400 Client Access Express.
- 2 Select and start **AS/400 Operation Navigator**.

- 3 Click the appropriate **AS/400 icon** .
- 4 You may be prompted to log on. Log on with a QSECOFR login.
- 5 Find and Open **QDLS**
- 6 Make sure the access rights are Read/Write.

Chapter 9: Post-Installation Checklist

Use this checklist to ensure that you complete all necessary tasks after installing the system.

See Running Document Production for prerequisites and steps to configure Document Production to process an extract file generated from POINT IN or Exceed.

If you installed Document Print, see [Additional Environment and Setup Considerations for Document Print](#) on page 71 of Appendix A.

For existing Document Production customers:

You will need to merge and recompile any custom changes you have made to the source code. For example, if you have made any custom changes to CLNTLIB, CSCCLIB, or CUSLIB in the SDK library, you will need to merge your changes with the newer version of the files and recompile. The new version of the DLL should be copied/moved to drive:\<path>\DLL.

Add your current resource libraries to the new release of the system.

Chapter 10: Running Document Production – POINT IN

Before clicking the Run Document Production icon created during installations, make sure the following prerequisites have been met.

- 1 The POINT IN system must successfully issue a policy, either through the immediate print menu option or through the daily cycle.
- 2 An extract file must successfully be created in an AS/400 shared folder.
- 3 The user running Run Document Production must have authority and access to this folder.

After the above prerequisites have been met, configure the batch files on the Document Production server with host user information and directory locations. See the section below.

Configuring CpyExtr.bat File

For Document Production to download the extract file from the host, the CpyExtr.bat must be configured with the correct host information. Follow the steps below to configure this file:

- 1 Browse to the where PNTBASE library was installed (for example, <Drive>:\<path>\mstres\PNTBASE).
- 2 Open CpyExtr.bat with Notepad or another editor and replace the following fields with your host information:

\\<hostname>\<folder name>

hostname - Your AS/400 shared folder URL or IP address. Contact your system administrator for this information. The connectivity software and Windows environment used will dictate the information used. See the **Document Production Interface Guide** for further information.

Example:

```
\\xxx.xx.xx.xxx\qdl\CSCd90
```

```
\\AS400Name\qdl\CSCd90
```

Folder Name - Your AS/400 shared folder name or IP address. Contact your system administrator for this information.

Example:

```
\\xxx.xx.xx.xxx\qdl\CSCd90
```

```
\\xxx.xx.xx.xxx\qdl\CSCp90
```

Note: The Shared Folder name is system sensitive. Each AS/400 POINT IN system will have its own Shared Folder. This is determined by the contents of the AS/400 Download Folder data area object. If you set up a DAP system for each AS/400 POINT IN system, Development, Interface and Production, for example, change this batch file to point to the AS/400 Shared Folder for each system.

Appendix A: Additional Environment and Setup Considerations for Document Print

This section describes some additional setup requirements that may be needed for Document Print.

NTFS File System Permissions Required For Document Print

Proper permissions on certain folders are required to allow Document Print to create, modify, and delete files. The table below documents the required NTFS file system permissions.

Server	Directory	Add Users\Groups	Permissions
Windows 2003	DocProd	IIS_WPG	Modify or Full Control

IIS Anonymous Security Considerations for Document Print

This section describes some setup considerations using IIS Anonymous authentication in a multiple server configuration with CSC Surround Solutions such as Document Production and Media Management. Because Document Production, for example, has a Document Archive accessed by Media Management, a file share is established for this Archive. To access the file shares using this Anonymous authentication, you must define the local Anonymous IDs and synchronize the passwords (IWAM_<ServerName>) for each server (Exceed Web Server, Document Production Server, and Media Management Server). You must always be given access to create files in the file share associated with the archive. Microsoft provides some VB scripts that can be useful in managing these Anonymous IDs, and this document refers to these scripts, but you should not rely on this information as a tutorial or as a complete guide to the installation and configuration of the products referred to below. Microsoft at <http://www.microsoft.com> should be your primary source of information regarding their products and configuration.

Synchronization of IWAM_<ServerName> ID on Communicating Servers

In order to interface Exceed with Surround Production such as Document Production and Media Management using IIS Anonymous authentication, it is necessary to define each Servers' local IWAM_<ServerName> ID on each of the other servers. As part of this process you will need to capture the generated passwords for the IWAM_<ServerName> IDs on each server in order to define them on the other servers with the password synchronized. Microsoft provides a VB script in \Inetpub\AdminScripts\Adutil.vbs to identify the generated password associated with the IWAM_<ServerName> ID. For additional detailed information on this situation, refer to the Microsoft Tech Net site at <http://support.microsoft.com>.

Steps for capturing IWAM_<ServerName> ID password:

- 1 Edit \Inetpub\AdminScripts\Adutil.vbs by paging to the bottom of the script and change the last IF/THEN/ELSE condition statement from TRUE/FALSE to FALSE/FALSE and save.
- 2 Execute \Inetpub\AdminScripts\Adutil.vbs script as follows to capture the IWAM_<ServerName> ID password:

```
\Inetpub\Adminscripts\Adutil.vbs GET w3svc/WAMUserPass
```

Result returned:

```
WAMUserPass:"*****"
```

Where "*****" is the password displayed by the utility.

- 3 Define Local IWAM_<ServerName> ID on each corresponding Server with the same password captured in step 2.

Attach all IWAM_<ServerName> ID(s) to any groups defined for file share access needed.