# **CS: COMPUTER SCIENCE & INFORMATION TECHNOLOGY**

Maximum Marks: 100

#### Read the following instructions carefully.

Duration: Three Hours

- 1. Do not open the seal of the Question Booklet until you are asked to do so by the invigilator.
- 2. Take out the Optical Response Sheet (ORS) from this Question Booklet without breaking the seal and read the instructions printed on the ORS carefully. If you find that the Question Booklet Code printed at the right hand top corner of this page does not match with the Booklet Code on the ORS, exchange the booklet immediately with a new sealed Question Booklet.
- 3. On the right half of the **ORS**, using ONLY a **black ink ball point pen**, (i) darken the bubble corresponding to your test paper code and the appropriate bubble under each digit of your registration number and (ii) write your registration number, your name and name of the examination centre and put your signature at the specified location.
- 4. This Question Booklet contains **20** pages including blank pages for rough work. After you are permitted to open the seal, please check all pages and report discrepancies, if any, to the invigilator.
- 5. There are a total of 65 questions carrying 100 marks. All these questions are of objective type. Each question has only **one** correct answer. Questions must be answered on the left hand side of the **ORS** by darkening the appropriate bubble (marked A, B, C, D) using ONLY a **black ink ball point pen** against the question number. **For each question darken the bubble of the correct answer**. More than one answer bubbled against a question will be treated as an incorrect response.
- 6. Since bubbles darkened by the black ink ball point pen **cannot** be erased, candidates should darken the bubbles in the ORS **very carefully**.
- 7. Questions Q.1 Q.25 carry 1 mark each. Questions Q.26 Q.55 carry 2 marks each. The 2 marks questions include two pairs of common data questions and two pairs of linked answer questions. The answer to the second question of the linked answer questions depends on the answer to the first question of the pair. If the first question in the linked pair is wrongly answered or is unattempted, then the answer to the second question in the pair will not be evaluated.
- 8. Questions Q.56 Q.65 belong to General Aptitude (GA) section and carry a total of 15 marks. Ouestions Q.56 Q.60 carry 1 mark each, and questions Q.61 Q.65 carry 2 marks each.
- 9. Unattempted questions will result in zero mark and wrong answers will result in **NEGATIVE** marks. For all 1 mark questions, ½ mark will be deducted for each wrong answer. For all 2 marks questions, ½ mark will be deducted for each wrong answer. However, in the case of the linked answer question pair, there will be negative marks only for wrong answer to the first question and no negative marks for wrong answer to the second question.
- 10. Calculator is allowed whereas charts, graph sheets or tables are **NOT** allowed in the examination hall.
- 11. Rough work can be done on the question paper itself. Blank pages are provided at the end of the question paper for rough work.
- 12. Before the start of the examination, write your name and registration number in the space provided below using a black ink ball point pen.

Name					
Registration Number	CS				

CS-A 1/20

#### O. 1 – O. 25 carry one mark each.

Q.1 Consider the following logical inferences.

**Nptel Reference** 

I<sub>1</sub>: If it rains then the cricket match will not be played.

The cricket match was played.

**Inference**: There was no rain.

I<sub>2</sub>: If it rains then the cricket match will not be played. It did not rain.

**Inference**: The cricket match was played.

Which of the following is **TRUE**?

- (A) Both  $I_1$  and  $I_2$  are correct inferences
- (B) I<sub>1</sub> is correct but I<sub>2</sub> is not a correct inference
- (C)  $I_1$  is not correct but  $I_2$  is a correct inference
- (D) Both I<sub>1</sub> and I<sub>2</sub> are not correct inferences
- Q.2 Which of the following is **TRUE**?

Nptel Reference 1

- (A) Every relation in 3NF is also in BCNF
- (B) A relation R is in 3NF if every non-prime attribute of R is fully functionally dependent on every key of R
- (C) Every relation in BCNF is also in 3NF

Nptel Reference 2

**Nptel Reference** 

- (D) No relation can be in both BCNF and 3NF
- Q.3 What will be the output of the following C program segment?

```
char inChar = 'A'
switch ( inChar ) {
        : printf ("Choice A\ n") ;
case 'A'
case 'B':
case 'C' : printf ("Choice B") ;
case 'D'
case 'E'
        : printf ( " No Choice" ) ; }
default
(A) No Choice
```

- (B) Choice A
- (C) Choice A

Choice B No Choice

- (D) Program gives no output as it is erroneous
- **Q.4** Assuming  $P \neq NP$ , which of the following is **TRUE**?

**Nptel Reference** 

(A) NP-complete = NP

(B) NP-complete  $\cap$  P =  $\emptyset$ 

(C) NP-hard = NP

- (D) P = NP-complete
- Q.5 The worst case running time to search for an element in a balanced binary search tree with  $n2^n$ elements is **Nptel Reference** 
  - (A)  $\Theta$  ( $n \log n$ )
- (B)  $\Theta(n2^n)$
- (C)  $\Theta(n)$
- (D)  $\Theta$  (log n)

CS-A

Q.6 The truth table

X	Y	<b>f</b> ( <b>X</b> , <b>Y</b> )
0	0	0
0	1	0
1	0	1
1	1	1

Nptel Reference

**Nptel Reference** 

**Nptel Reference** 

**Nptel Reference** 

represents the Boolean function

- (A) X
- (B)X+Y
- (C)  $X \oplus Y$
- (D) Y
- Q.7 The decimal value 0.5 in IEEE single precision floating point representation has
  - (A) fraction bits of 000...000 and exponent value of 0
    - (B) fraction bits of 000...000 and exponent value of -1
    - (C) fraction bits of 100...000 and exponent value of 0
    - (D) no exact representation
- O.8 A process executes the code

fork();

fork();

fork();

The total number of **child** processes created is

- (A)3
- (B)4
- (C) 7
- (D) 8
- Q.9 Consider the function  $f(x) = \sin(x)$  in the interval  $x \in [\pi/4, 7\pi/4]$ . The number and location(s) of the local minima of this function are
  - (A) One, at  $\pi/2$
  - (B) One, at  $3\pi/2$
  - (C) Two, at  $\pi/2$  and  $3\pi/2$
  - (D) Two, at  $\pi/4$  and  $3\pi/2$
- Q.10 The protocol data unit (PDU) for the application layer in the Internet stack is Nptel Reference-Lec-1
  - (A) Segment
- (B) Datagram
- (C) Message
- (D) Frame
- Q.11 Let A be the 2  $\times$  2 matrix with elements  $a_{11} = a_{12} = a_{21} = +1$  and  $a_{22} = -1$ . Then the eigenvalues of the matrix  $A^{19}$  are
  - (A) 1024 and -1024 (C)  $4\sqrt{2}$  and  $-4\sqrt{2}$


(B)  $1024\sqrt{2}$  and  $-1024\sqrt{2}$ 

(D)  $512\sqrt{2}$  and  $-512\sqrt{2}$ 

Q.12 What is the complement of the language accepted by the NFA shown below? Assume  $\Sigma = \{a\}$  and  $\varepsilon$  is the empty string.

**Nptel Reference** 

Nptel Reference-Mod2Lec13



- $(A) \varnothing$
- (B)  $\{\epsilon\}$
- (C) a\*
- (D)  $\{a, \epsilon\}$

Q.13	What is the correct tran		g statement into mathemates umbers are rational"	atical logic	??
	(A) $\exists x \text{ (real}(x) \lor \text{ ration}$ (B) $\forall x \text{ (real}(x) \to \text{ ration}$ (C) $\exists x \text{ (real}(x) \land \text{ ration}$ (D) $\exists x \text{ (rational}(x) \to \text{ ration}$	$\operatorname{nal}(x)$ ) $\operatorname{nal}(x)$ ) $\operatorname{nal}(x)$ )	unioers are radional		Nptel Reference
Q.14	Given the basic ER an	d relational models, whi	ch of the following is <b>I</b> N	NCORRE	C <b>T</b> ?
	<ul><li>(B) An attribute of an (C) In a row of a relati</li></ul>		an one value an have more than one v can have exactly one value		Nptel Reference Lec 3 & 7  LL value
Q.15	Which of the following	g statements are TRUE	about an SQL query?		Nptel Reference
	Q: An SQL query can R: All attributes used	contain a HAVING clausin the GROUP BY claus	use even if it does not hause only if it has a GRO se must appear in the SE clause need to appear in	UP BY cla LECT cla	use use
	(A) P and R	(B) P and S	(C) Q and R	(D) Q a	nd S
Q.16	The recurrence relation <i>n</i> discs is	n capturing the optimal	execution time of the T	lowers of H	•
	(A) $T(n) = 2T(n-2) +$ (C) $T(n) = 2T(n/2) + 1$	2	(B) $T(n) = 2T(n-1) + (D) T(n) = 2T(n-1) + (D) T(n$		Nptel Reference
Q.17	_		10 vertices with 15 edg edding of G on the plane		
	(A) 3	(B) 4	(C) 5	(D) 6	repter Reference
Q.18			e worst case and avera ch of the following is A		
	(A) $A(n) = \Omega(W(n))$ (C) $A(n) = O(W(n))$		(B) $A(n) = \Theta(W(n))$ (D) $A(n) = O(W(n))$		Nptel Reference
Q.19	The amount of ROM r	needed to implement a 4	bit multiplier is		Nptel Reference
	(A) 64 bits	(B) 128 bits	(C) 1 Kbits	(D) 2 K	bits
Q.20	Register renaming is d	one in pipelined process	sors		
					Nptel Reference
Q.21		riable $X$ that takes value at ion function $F(x)$ at $x = x$	es +1 and -1 with proba =-1 and +1 are	bility 0.5	each. The values of Nptel Reference
	(A) 0 and 0.5	(B) 0 and 1	(C) 0.5 and 1	(D) 0.25	5 and 0.75


CS-A 4/20

2012			COMPUTER S	CIENCE & INFO	ORMATION TECH CS
Q.22	Which of the fo	ollowing transport layer	protocols is used to support ele	ectronic mail	?
	(A) SMTP	(B) IP	(C) TCP	(D) UDP	Nptel Reference-Lec-39
Q.23	In the IPv4 add	ressing format, the num	nber of networks allowed under	Class C add	lresses is
	(A) $2^{14}$	(B) $2^7$	(C) $2^{21}$	(D) $2^{24}$	Nptel Reference-Lec-28
Q.24	Which of the fo	ollowing problems are d	lecidable?		
	1)		ever produce an output?		Nptel Reference
	2)		anguage, then, is $L$ also contex	kt-free?	•
	3)		age, then, is $L$ also regular?		
	4)	If L is a recursive lang	guage, then, is $L$ also recursive	?	
	(A) 1, 2, 3, 4	(B) 1, 2	(C) 2, 3, 4	(D) 3, 4	
Q.25	Given the langu	$age L = \{ab, aa, baa\},\$	which of the following strings	are in $L^*$ ?	
	1) 2) 3) 4)	abaabaaabaa aaaabaaaa baaaaabaaaab baaaaabaa			Nptel Reference
	(A) 1, 2 and 3		(B) 2, 3 and 4		
	(C) 1, 2 and 4		(D) 1, 3 and 4		

CS-A 5/20


### Q. 26 to Q. 55 carry two marks each.

#### 0.26 Which of the following graphs is isomorphic to




Nptel Reference-Lec-14


(A)




(B)



(C)



(D)



Q.27 Consider the following transactions with data items P and Q initialized to zero:

```
T_1: \text{read } (P); \\ \text{read } (Q); \\ \text{if } P = 0 \text{ then } Q := Q + 1 ; \\ \text{write } (Q). \\ T_2: \text{read } (Q); \\ \text{read } (P); \\ \text{if } Q = 0 \text{ then } P := P + 1 ; \\ \text{write } (P). \\ \end{cases}
```

Nptel Reference

Any non-serial interleaving of  $T_1$  and  $T_2$  for concurrent execution leads to

- (A) a serializable schedule
- (B) a schedule that is not conflict serializable
- (C) a conflict serializable schedule
- (D) a schedule for which a precedence graph cannot be drawn
- Q.28 The bisection method is applied to compute a zero of the function  $f(x) = x^4 x^3 x^2 4$  in the interval [1,9]. The method converges to a solution after \_\_\_\_\_\_ iterations. Nptel Reference
  - (A) 1
- (B) 3
- (C) 5
- (D) 7

Q.29 Let G be a weighted graph with edge weights greater than one and G' be the graph constructed by squaring the weights of edges in G. Let T and T' be the minimum spanning trees of G and G', respectively, with total weights t and t'. Which of the following statements is **TRUE**?

- (A) T' = T with total weight  $t' = t^2$
- (B) T' = T with total weight  $t' < t^2$
- (C)  $T' \neq T$  but total weight  $t' = t^2$
- (D) None of the above

Nptel Reference

Q.30 What is the minimal form of the Karnaugh map shown below? Assume that **X** denotes a don't care term.

ab cd	00	01	11	10
00	1	X	X	1
01	X			1
11				
10	1			X

Nptel Reference

- (A)  $\bar{b}\bar{d}$
- (B)  $\overline{b}\overline{d} + \overline{b}\overline{c}$
- (C)  $\overline{b}\overline{d} + a\overline{b}\overline{c}d$
- (D)  $\overline{b}\overline{d} + \overline{b}\overline{c} + \overline{c}\overline{d}$
- Q.31 Consider the 3 processes, P1, P2 and P3 shown in the table.

Nptel Reference

Process	Arrival time	Time Units Required
P1	0	5
P2	1	7
P3	3	4

The completion order of the 3 processes under the policies FCFS and RR2 (round robin scheduling with CPU quantum of 2 time units) are

- (A) **FCFS:** P1, P2, P3 **RR2:** P1, P2, P3
- (B) **FCFS:** P1, P3, P2 **RR2:** P1, P3, P2
- (C) **FCFS:** P1, P2, P3 **RR2:** P1, P3, P2
- (D) **FCFS:** P1, P3, P2 **RR2:** P1, P2, P3
- Q.32 Fetch\_And\_Add(X,i) is an atomic Read-Modify-Write instruction that reads the value of memory location X, increments it by the value i, and returns the old value of X. It is used in the pseudocode shown below to implement a busy-wait lock. L is an unsigned integer shared variable initialized to 0. The value of 0 corresponds to lock being available, while any non-zero value corresponds to the lock being not available.

**Nptel Reference** 

```
AcquireLock(L){
     while (Fetch_And_Add(L,1))
     L = 1;
}
ReleaseLock(L){
    L = 0;
}
```

This implementation

- (A) fails as L can overflow
- (B) fails as L can take on a non-zero value when the lock is actually available
- (C) works correctly but may starve some processes
- (D) works correctly without starvation
- Q.33 Suppose a fair six-sided die is rolled once. If the value on the die is 1, 2, or 3, the die is rolled a second time. What is the probability that the sum total of values that turn up is at least 6?
  - (A) 10/21
- (B) 5/12
- (C) 2/3
- (D) 1/6

Nptel Reference

CS-A 7/20

Q.34 An Internet Service Provider (ISP) has the following chunk of CIDR-based IP addresses available with it: 245.248.128.0/20. The ISP wants to give half of this chunk of addresses to Organization A, and a quarter to Organization B, while retaining the remaining with itself. Which of the following is a valid allocation of addresses to A and B?

Nptel Reference-Lec-28

- (A) 245.248.136.0/21 and 245.248.128.0/22
- (B) 245.248.128.0/21 and 245.248.128.0/22
- (C) 245.248.132.0/22 and 245.248.132.0/21
- (D) 245.248.136.0/24 and 245.248.132.0/21
- Q.35 Suppose a circular queue of capacity (n-1) elements is implemented with an array of n elements. Assume that the insertion and deletion operations are carried out using REAR and FRONT as array index variables, respectively. Initially, REAR = FRONT = 0. The conditions to detect *queue full* and *queue empty* are

  Nptel Reference
  - (A) full: (REAR+1) mod n == FRONTempty: REAR == FRONT
    - empty: REAR == FRONT empty: (FRONT+1) mod n == REAR
  - (C) full: REAR == FRONT empty: (REAR+1) mod n == FRONT
- (D) *full*: (FRONT+1) mod *n* == REAR *empty*: REAR == FRONT


(B) full: (REAR+1) mod n == FRONT


CS-A 8/20

Q.36 Consider the program given below, in a block-structured pseudo-language with lexical scoping and nesting of procedures permitted.

Nptel Reference Program main; Var ... Procedure A1; Var ... Call A2; End A1 Procedure A2; Var ... Procedure A21; Var ... Call A1; End A21 Call A21; End A2 Call A1; End main. Consider the calling chain: Main  $\rightarrow$  A1  $\rightarrow$  A2  $\rightarrow$  A21  $\rightarrow$  A1

The correct set of activation records along with their access links is given by

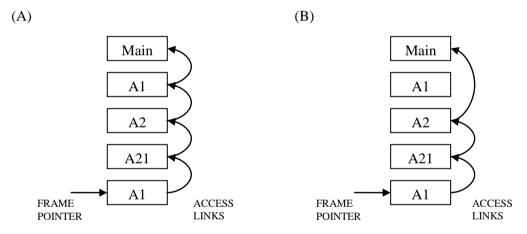

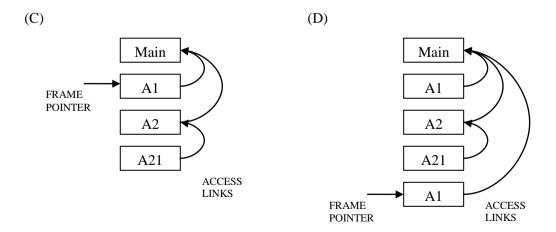

CS-A 9/20

- Q.37 How many onto (or surjective) functions are there from an *n*-element ( $n \ge 2$ ) set to a 2-element set?
  - (A)  $2^{n}$
- (B)  $2^n 1$
- (C)  $2^n 2$
- (D)  $2(2^n 2)$  Nptel Reference
- Q.38 Let G be a complete undirected graph on 6 vertices. If vertices of G are labeled, then the number of distinct cycles of length 4 in G is equal to


Nptel Reference

- (A) 15
- (B) 30
- (C) 90
- (D) 360
- Q.39 A list of n strings, each of length n, is sorted into lexicographic order using the merge-sort algorithm. The worst case running time of this computation is

Nptel Reference

- (A) O  $(n \log n)$
- (B) O  $(n^2 \log n)$
- (C) O  $(n^2 + \log n)$
- (D) O  $(n^2)$
- Q.40 Consider the directed graph shown in the figure below. There are multiple shortest paths between vertices S and T. Which one will be reported by Dijkstra's shortest path algorithm? Assume that, in any iteration, the shortest path to a vertex v is updated only when a strictly shorter path to v is discovered.

Nptel Reference

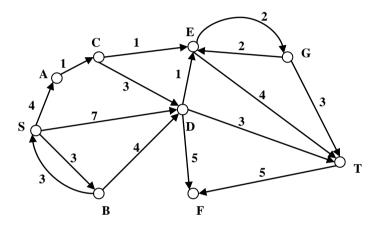

- (A) SDT
- (B) SBDT
- (C) SACDT
- (D) SACET
- Q.41 A file system with 300 GByte disk uses a file descriptor with 8 direct block addresses, 1 indirect block address and 1 doubly indirect block address. The size of each disk block is 128 Bytes and the size of each disk block address is 8 Bytes. The maximum possible file size in this file system is
  - (A) 3 KBytes

Nptel Reference

- (B) 35 KBytes
- (C) 280 KBytes
- (D) dependent on the size of the disk
- Q.42 Consider the virtual page reference string

on a demand paged virtual memory system running on a computer system that has main memory size of 3 page frames which are initially empty. Let LRU, FIFO and OPTIMAL denote the number of page faults under the corresponding page replacement policy. Then

Nptel Reference

- (A) OPTIMAL < LRU < FIFO
- (B) OPTIMAL < FIFO < LRU

(C) OPTIMAL = LRU

- (D) OPTIMAL = FIFO
- Q.43 Suppose  $R_1(\underline{A}, B)$  and  $R_2(\underline{C}, D)$  are two relation schemas. Let  $r_1$  and  $r_2$  be the corresponding relation instances. B is a foreign key that refers to C in  $R_2$ . If data in  $r_1$  and  $r_2$  satisfy referential integrity constraints, which of the following is **ALWAYS TRUE**?

**Nptel Reference** 


- (A)  $\prod_{\mathbf{B}}(r_1) \prod_{\mathbf{C}}(r_2) = \emptyset$
- (B)  $\prod_{\mathcal{C}}(r_2) \prod_{\mathcal{B}}(r_1) = \emptyset$
- (C)  $\prod_{B}(r_1) = \prod_{C}(r_2)$
- (D)  $\prod_{B}(r_1) \prod_{C}(r_2) \neq \emptyset$

- Q.44 Consider a source computer (S) transmitting a file of size 10<sup>6</sup> bits to a destination computer (D) over a network of two routers (R<sub>1</sub> and R<sub>2</sub>) and three links (L<sub>1</sub>, L<sub>2</sub>, and L<sub>3</sub>). L<sub>1</sub> connects S to R<sub>1</sub>; L<sub>2</sub> connects R<sub>1</sub> to R<sub>2</sub>; and L<sub>3</sub> connects R<sub>2</sub> to D. Let each link be of length 100 km. Assume signals travel over each link at a speed of 10<sup>8</sup> meters per second. Assume that the link bandwidth on each link is 1Mbps. Let the file be broken down into 1000 packets each of size 1000 bits. Find the total sum of transmission and propagation delays in transmitting the file from S to D?

  Nptel Reference-Lec15
  - (A) 1005 ms
- (B) 1010 ms
- (C) 3000 ms
- (D) 3003 ms
- Q.45 Consider an instance of TCP's Additive Increase Multiplicative Decrease (AIMD) algorithm where the window size at the start of the slow start phase is 2 MSS and the threshold at the start of the first transmission is 8 MSS. Assume that a timeout occurs during the fifth transmission. Find the congestion window size at the end of the tenth transmission.

Nptel Reference-Lec35

- (A) 8 MSS
- (B) 14 MSS
- (C) 7 MSS
- (D) 12 MSS
- Q.46 Consider the set of strings on {0,1} in which, every substring of 3 symbols has at most two zeros. For example, 001110 and 011001 are in the language, but 100010 is not. All strings of length less than 3 are also in the language. A partially completed DFA that accepts this language is shown below.

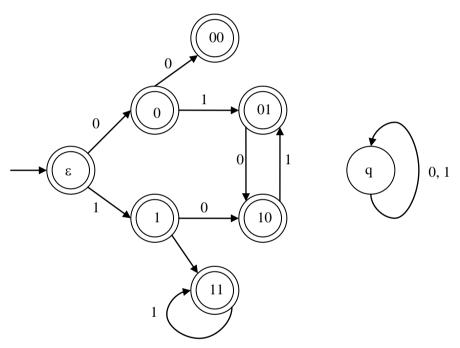

**Nptel Reference** 

The missing arcs in the DFA are

(A)

	00	01	10	11	q
00	1	0			
01				1	
10	0				
11			0		

(B)

	00	01	10	11	q
00		0			1
01		1			
10				0	
11		0			

(C)

	00	01	10	11	q
00		1			0
01		1			
10			0		
11		0			

(D)

	00	01	10	11	q
00		1			0
01				1	
10	0				
11			0		

CS-A 11/20

Q.47 The height of a tree is defined as the number of edges on the longest path in the tree. The function shown in the pseudocode below is invoked as height(root) to compute the height of a binary tree rooted at the tree pointer root.

**Nptel Reference** 

The appropriate expressions for the two boxes B1 and B2 are

- (A) B1:  $(1+\text{height}(n \rightarrow \text{right}))$ B2: (1+max(h1, h2))
- (B) B1:  $(height(n \rightarrow right))$ B2: (1+max(h1,h2))

(C) B1: height(n  $\rightarrow$  right) B2: max(h1, h2) (D) B1:  $(1 + \text{height}(n \rightarrow \text{right}))$ B2:  $\max(h1, h2)$ 

CS-A 12/20

### **Common Data Questions**

#### Common Data for Questions 48 and 49:

Consider the following C code segment.

```
int a, b, c = 0;
void prtFun(void);
main( )
                                    /* Line 1 */
   static int a = 1;
   prtFun();
   a += 1;
   prtFun( );
   printf(" \n %d %d ", a, b);
}
void prtFun(void)
                                       Line 2 */
   static int a = 2;
   int b = 1;
   a += ++b;
   printf(" \n %d %d ", a, b);
}
```

Q.48 What output will be generated by the given code segment?

Nptel Reference

```
(C)
                                                                         (D)
(A)
                        (B)
                                 2
                                                          2
 3
        1
                         4
                                                  4
                                                                          3
                                                                                   1
                                                          2
 4
        1
                         6
                                 1
                                                  6
                                                                          5
                                                                                   2
 4
        2
                         6
                                 1
                                                  2
                                                          0
                                                                          5
                                                                                   2
```

Q.49 What output will be generated by the given code segment if:

Line 1 is replaced by auto int a = 1; Line 2 is replaced by register int a = 2;

Nptel Reference

```
(D)
(A)
                       (B)
                                               (C)
 3
                                2
                                                                                2
                        4
                                                4
                                                        2
                                                                        4
        1
 4
                                                        2
                                                                        4
                                                                                2
        1
                        6
                                1
                                                6
 4
        2
                                                2
                                                        0
                                                                        2
                                                                                0
                        6
                                1
```

CS-A 13/20

### Common Data for Questions 50 and 51:

Consider the following relations A, B and C:

$\mathbf{A}$					
Id	Name	Age			
12	Arun	60			
15	Shreya	24			
99	Rohit	11			

В				
Id	Name	Age		
15	Shreya	24		
25	Hari	40		
98	Rohit	20		
99	Rohit	11		

C			
Id	Phone	Area	
10	2200	02	
99	2100	01	

Q.50 How many tuples does the result of the following relational algebra expression contain? Assume that the schema of  $A \cup B$  is the same as that of A.

Nptel Reference

$$(A \cup B) \bowtie_{A.Id > 40 \lor C.Id < 15} C$$

- (A) 7
- (B) 4
- (C) 5
- (D) 9

Q.51 How many tuples does the result of the following SQL query contain?

SELECT A.Id Nptel Reference

FROM A

WHERE A.Age > ALL (SELECT B.Age

FROM B

**WHERE** B.Name = 'Arun')

- (A) 4
- (B) 3
- (C) 0
- (D) 1

#### **Linked Answer Questions**

#### Statement for Linked Answer Questions 52 and 53:

For the grammar below, a partial LL(1) parsing table is also presented along with the grammar. Entries that need to be filled are indicated as **E1**, **E2**, and **E3**.  $\varepsilon$  is the empty string, \$ indicates end of input, and, | separates alternate right hand sides of productions.

$$S \rightarrow a A b B \mid b A a B \mid \varepsilon$$
  
 $A \rightarrow S$   
 $B \rightarrow S$ 

	a	b	\$
S	<b>E</b> 1	<b>E2</b>	$S \rightarrow \varepsilon$
A	$A \rightarrow S$	$A \rightarrow S$	error
В	$B \rightarrow S$	$B \rightarrow S$	<b>E3</b>

- Q.52 The FIRST and FOLLOW sets for the non-terminals A and B are
  - (A)  $FIRST(A) = \{a, b, \epsilon\} = FIRST(B)$   $FOLLOW(A) = \{a, b\}$  $FOLLOW(B) = \{a, b, \$\}$
- (B)  $FIRST(A) = \{a, b, \$\}$   $FIRST(B) = \{a, b, \epsilon\}$   $FOLLOW(A) = \{a, b\}$  $FOLLOW(B) = \{\$\}$
- (C) FIRST(A) =  $\{a, b, \epsilon\}$  = FIRST(B) FOLLOW(A) =  $\{a, b\}$ FOLLOW(B) =  $\emptyset$
- (D)  $FIRST(A) = \{a, b\} = FIRST(B)$   $FOLLOW(A) = \{a, b\}$  $FOLLOW(B) = \{a, b\}$
- Q.53 The appropriate entries for E1, E2, and E3 are
  - (A) E1:  $S \rightarrow aAbB$ ,  $A \rightarrow S$ E2:  $S \rightarrow bAaB$ ,  $B \rightarrow S$ E3:  $B \rightarrow S$

(B) E1: S  $\rightarrow$  aAbB, S  $\rightarrow$   $\epsilon$ E2: S  $\rightarrow$  bAaB, S  $\rightarrow$   $\epsilon$ E3: S  $\rightarrow$   $\epsilon$ 

(C) E1: S  $\rightarrow$  aAbB, S  $\rightarrow$   $\epsilon$ E2: S  $\rightarrow$  bAaB, S  $\rightarrow$   $\epsilon$ E3: B  $\rightarrow$  S (D) E1: A  $\rightarrow$  S, S  $\rightarrow$   $\epsilon$ E2: B  $\rightarrow$  S, S  $\rightarrow$   $\epsilon$ E3: B  $\rightarrow$  S

#### Statement for Linked Answer Questions 54 and 55:

A computer has a 256 KByte, 4-way set associative, write back data cache with block size of 32 Bytes. The processor sends 32 bit addresses to the cache controller. Each cache tag directory entry contains, in addition to address tag, 2 valid bits, 1 modified bit and 1 replacement bit.

Q.54 The number of bits in the tag field of an address is

Nptel Reference-Lec30

(A) 11

(B) 14

(C) 16

(D) 27

Q.55 The size of the cache tag directory is

Nptel Reference

(A) 160 Kbits

(B) 136 Kbits

(C) 40 Kbits

(D) 32 Kbits

# **General Aptitude (GA) Questions**

Q. 56 –	Q.	<b>60</b>	carry	one	mark	each.
---------	----	-----------	-------	-----	------	-------

•	· ·							
Q.56	The cost function for a product in a firm is given by $5q^2$ , where $q$ is the amount of production. The firm can sell the product at a market price of $\mathbb{Z}$ 50 per unit. The number of units to be produced by the firm such that the profit is maximized is  Nptel Reference							
	(A) 5	(B) 10	(C) 15	(D) 25				
Q.57	Choose the most apsentence:	Choose the most appropriate alternative from the options given below to complete the following sentence:						
	Despite several	the mission	succeeded in its attempt	t to resolve the conflict.				
	(A) attempts	(B) setbacks	(C) meetings	(D) delegations				
Q.58	Which one of the following options is the closest in meaning to the word given below?							
	Mitigate							
	(A) Diminish	(B) Divulge	(C) Dedicate	(D) Denote				
Q.59	Choose the grammatically <b>INCORRECT</b> sentence:							
	<ul><li>(B) This country's e</li><li>(C) The committee sum.</li></ul>	expenditure is not less initially asked for a	e service charges of Three s than that of Bangladesh. funding of Fifty Lakh ru tional reforms is very less	pees, but later settled for a lesser				
Q.60	Choose the most appropriate alternative from the options given below to complete the following sentence:							
	Suresh's dog is the one was hurt in the stampede.							
	(A) that	(B) which	(C) who	(D) whom				
Q. 61	- Q. 65 carry two	marks each.						
Q.61	interviews to colle	ect and collate econ	omic data. Requiremen	Interviewer to conduct personal nts: High School-pass, must be n paid, expenses reimbursed.				
	Which one of the following is the best inference from the above advertisement?							
	<ul><li>(A) Gender-discrime</li><li>(B) Xenophobic</li><li>(C) Not designed to</li><li>(D) Not gender-disc</li></ul>	make the post attract	ive					
Q.62	A political party orders an arch for the entrance to the ground in which the annual convention is being held. The profile of the arch follows the equation $y = 2x - 0.1x^2$ where y is the height of the arch in meters. The maximum possible height of the arch is  Nptel Reference							
	(A) 8 meters	(B) 10 meters	(C) 12 meters	(D) 14 meters				

CS-A 16/20 Q.63 An automobile plant contracted to buy shock absorbers from two suppliers X and Y. X supplies 60% and Y supplies 40% of the shock absorbers. All shock absorbers are subjected to a quality test. The ones that pass the quality test are considered reliable. Of X's shock absorbers, 96% are reliable.

Of Y's shock absorbers, 72% are reliable.

Nptel Reference

The probability that a randomly chosen shock absorber, which is found to be reliable, is made by Y is

(A) 0.288

(B) 0.334

(C) 0.667

(D) 0.720

Q.64 Which of the following assertions are **CORRECT**?

P: Adding 7 to each entry in a list adds 7 to the mean of the list

Q: Adding 7 to each entry in a list adds 7 to the standard deviation of the list

R: Doubling each entry in a list doubles the mean of the list

S: Doubling each entry in a list leaves the standard deviation of the list unchanged

(A) P, Q

(B) Q, R

(C) P, R

(D) R, S

Q.65 Given the sequence of terms, AD CG FK JP, the next term is

(A) OV

(B) OW

(C) PV

(D) PW

## END OF THE QUESTION PAPER

CS-A 17/20

# Space for Rough Work

CS-A 18/20

# Space for Rough Work

CS-A 19/20

# Space for Rough Work

CS-A 20/20