

WebLogic Multitenancy Workshop

Contents

INTRODUCTION:	4
Domain Partition:	4
Resource Groups:	4
Virtual Target:	4
Virtual Box Environment	7
The Hands on Lab Environment	7
LAB 1: DOMAIN CREATION AND NON-MT CONFIG	8
Overview	8
Start the database	8
Create WebLogic Restricted JRF Domain	8
Configuration of WebLogic base_domain	10
LAB 2: MULTITENANCY CONFIGURATION	14
Overview:	14
Configuration of Medrec Application in Domain Partition 1	15
Accessing Medrec Application in Domain Partition dp1	35
Configuration of Medrec Application in Domain Partition 2	37
Accessing Medrec Application in Domain Partition dp2	38
Configuration of Day Trader application in domain partition 3	39
Access Day Trader Application in Domain Partition dp3	40
LAB 3: SECURITY ISOLATION	41
Overview	41
Creating a New Security Realm	42

Assign the mynewrealm security realm to domain partition dp1.....	45
Verified that we have two security realms in different domain partition in single domain	46
LAB 4: EXPORT/IMPORT DOMAIN PARTITION.....	47
Overview	47
Stop and remove domain partition dp1 from base_domain	48
Create a new dev single server (Admin Server) domain	50
Configure domain for Medrec Application.....	51
Exporting the domain partition.....	64
Importing the domain partition.....	65
LAB 5: RESOURCE CONSUMPTION MANAGEMENT.....	67
Overview	67
Enabling RCM by adding extra arguments in Server JAVA_OPTION Arguments	68
Creating a Resource Manager and Configuring Resource Manager for a domain partition	70
Associate the Resource Manager with Medrec-Dev domain partition.....	71
LAB 6: OTD INTEGRATION AND RESOURCE MIGRATION.....	74
Overview	74
Create OTD Restricted JRF Domain.....	75
Registering an OTD Runtime Instance.....	83
Creating Domain Partition front ended by OTD	85
Deploying simple application to test OTD integration with weblogic	88
Migration Resource Group from one Cluster to other Cluster	90
Access Application through OTD	92
LAB 7: CLONING A PARTITION.....	94
Overview:	94
Applying Patch to domain:.....	94

Exporting a domain:.....	94
Importing a domain:.....	94
CLEANING AND RESETING	98
Cleaning up Environment	98
Appendix:	99
Appendix- Multitenancy Workshop in Cloud	100
Lab 1: CREATING DBCS/JCS INSTANCES.....	100
LAB 2: MULTITENANCY CONFIGURATION.....	101
LAB 3: SECURITY ISOLATION.....	101
LAB 4: EXPORT/IMPORT PARTITION	101
LAB 5: RESOURCE CONSUMPTION MANAGEMENT	102
LAB 7: CLONNING A PARTITION.....	103
CLEANUP:.....	103

INTRODUCTION:

Multitenancy in WebLogic Server provides a sharable infrastructure for use by client organizations (tenants). By allowing one domain to support multiple tenants, WLS MT improves density and achieves a more efficient use of resources while eliminating the trade-offs that are traditionally made in a shared environment: Isolation issues. Multitenancy essentially creates the tension between isolation and sharing. Isolation separates both the administration and runtime of different tenants from each other, where resource sharing among tenants improves efficiency and reduces operation costs.

Domain Partition:

WebLogic Server MT provides resource isolation with in domain partitions, an administrative and runtime slice of a WebLogic domain that is dedicated to running application instances and related resources for a tenant. Domain Partition achieve greater density by allowing application instances and related resources to share the domain, WebLogic Server itself, the Java virtual machine, and the operating system while isolating tenant specific application data, configuration, and runtime traffic. Each domain partition has its own runtime copy of the application and resources.

Resource Groups:

WLS MT introduces resource groups, simply as a convenient way to group together Java EE applications and the resources they use into a distinct administrative unit within the domain. The resources and applications are “fully qualified” in that administrator provides all information needed to start or connect to those resources, including credentials for connecting to data source and targeting information for Java EE application. A resource group will either contain these deployable resources directly or refer to a resource group templates which contain the resources. Resource group can be defined at the domain level, or be specific to domain partition.

All the resources in or referenced by a resource group are targeted together (to the same target). Resource group can be started and stopped.


Virtual Target:

Encapsulate where a partition or resource group runs and how to route traffic to them, including addresses, protocol settings, and targeting, Request routing is determined by the host name and optional URI.

May Include:-

- Host name and port
- Optional URI
- Network Access Point or Channel
- Protocol specific configuration
 - T3, IIOP
 - Web Server
- Target Clusters and managed servers

In Multitenant environment, We create Virtual Target first, In previous versions of WebLogic Server, We Targeted our application, system resources (JDBC or JMS Resources) to Clusters, Managed Servers part of Cluster or stand alone managed server. But here we target our resources to Virtual Target. After creation of Virtual Target, we create a domain partition, while creating domain partition we can create resource group. A domain partition can have multiple resource groups. Then we target domain partition to the Virtual Target. Below diagram gives you the picture how they work together.

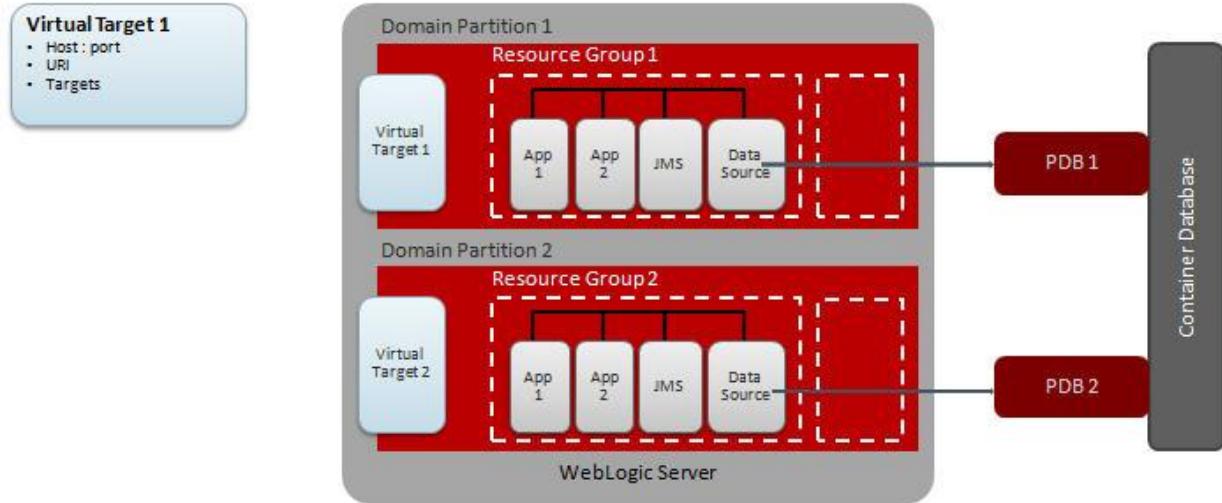

As in the Above Diagram, We created Virtual target 1, Virtual Target 2 which are Targeted to WebLogic Server. Then we created Two Domain partitions, Domain partition 1 has Resource Group 1 and Domain Partition 2 has Resource Group 2.

To know more about the Multitenancy, you can follow the link [here](#).

We have total 6 Labs; the brief information about each lab is given below.

Lab 1 consist Non MT configuration, in this Lab we create basic configuration required for each lab. First we create **base_domain** using the **Restricted-JRF** template. This is the domain we are using in each lab. Using the Fusion Middleware Control Console, we will create machine and one dynamic cluster of initial size of two managed server inside it.

Lab 2 consist creation of MT configuration, in which we creates virtual target, domain partition and resource group. We show you can easily deploy one application twice in a domain in different domain partition. In this case both applications will be connected to different database. Good thing is that you don't need to modify the application deploying to different domain partition because we have JNDI isolation. We also use day trader application which is build by IBM, we made few changes in the application to run the application in Non MT environment, and we took the same application to deploy in MT environment (inside domain partition). So you don't need any specific application development to deploy the application in Multitenant environment.

Lab3 shows how you can have two or more security realms active inside a domain. Traditionally in WebLogic server, we have more than one Security realm but only one is active for the domain. Here, we have multiple domain partition, so you can have separate security realm for each domain partition. In Lab 2 we deploy Medrec application in domain partition dp1 and dp2. As while creating domain partition dp2 we do not choose any security realm so it uses the default security realm. In Lab 3 we create a new security realm and assign it to domain partition dp1. So both domain partitions will have different set of authorized user.

Lab 4 shows how you can easily move domain partition from one environment to another environment. Generally we work in simple development environment, like no restricted JRF, no cluster. But we need to test our application in testing environment, run in production environment. In Lab 4 we create a **dev_domain** using a by default templates and it consist only admin server. We do the required configuration for Medrec Application in **dev_domain**, once we have Medrec application is deployed in domain partition Medrec-Dev in **dev_domain**, we export the domain and import it in **base_domain**.

Lab 5 shows how you can configure the resource configuration manager. As the domain partition is targeted to the Virtual target which is targeted to a cluster. So multiple domain partition may be using the same cluster, in that scenario to avoid one partition to use the resources excessively, we set the limit using resource configuration management, we specify the limit for notify, slow and shutdown action. As the resource uses reaches that limit, particular action happens.

Lab 6 shows how you can integrate OTD as a front end in domain partition. It shows the steps how to integrate OTD while creating the domain partition. This Lab also shows you the Resource group migration from one cluster to other cluster. As OTD is front ending your domain partition, so without any interruption you can access the application using the same URL.

Lab 7 shows how you can clone existing domain partition. We are importing the domain partition in the same domain from where we exported the domain partition to perform the clone operation. We need to create virtual target and specify the name of new virtual target in **partition-attributes.json** file. We also need to specify new partition name while importing the partition.

You create three domains as part of this workshop. There role are as given:

base_domain: We create this domain as part of Lab 1. This is the main domain which we are using in each lab. We create machine, dynamic cluster and domain partitions.

dev_domain: We create this domain as part of Lab 4. This domain uses default template and contain Admin Server only. This domain represent domain which we generally uses for development purposes. We create a domain partition Medrec-Dev inside it, which we later export and import it to **base_domain**.

otd_domain: We create this domain as part of Lab 6. This domain consist Admin Server, and Load Balance instance.

How to Use Individual Labs:

Lab 1 and Lab 2 are compulsory.

Lab 3: You need to run Lab 1 and Lab2 before executing Lab 3.

Lab 4: You need to run Lab 1 and Lab 2 before executing Lab 4.

Lab 5: You need to run Lab 1 and Lab 2 compulsory for it. And if you do not execute Lab 4 before running Lab 5, then instead of modifying the changes to Medrec-Dev domain, you need to modify the domain partition dp1.

Lab 6: You need to run Lab 1 before executing the Lab 6.

Virtual Box Environment

The Hands on Lab Environment

Operating System Details

Operating System	Oracle Linux 6.4 x86_64
Hostname	localhost, wins-vbox
Root User	root/oracle
Oracle User	oracle/welcome1

Note: For this hand on lab you should only need to use **oracle** user account.

Installation Directories

JDK 1.8.0_60	/usr/java/jdk1.8.0_60/
WebLogic Server 12.2.1	/u01/wins/wls1221/
Oracle Traffic Director 12.2.1	/u01/wins/wls1221/
Oracle Database 12c	/u01/app/oracle/product/12.1.0/dbhome_1/

Workshop Content:

Labs Directory	/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/
----------------	---

LAB 1: DOMAIN CREATION AND NON-MT CONFIG

Overview

In this lab, we are going to perform the below operations.

- We create a WebLogic domain, in that domain we create machine, dynamic cluster.

Start the database


We have two Pluggable database **pdborcl** and **pdb2**; we are going to start both the database.

- a. In Desktop, Double Click on Icon “**Start Database**”.


Note: Wait until the Window disappears.

Create WebLogic Restricted JRF Domain

- a. Open a new terminal.
- b. cd /u01/wins/wls1221/oracle_common/common/bin/
- c. ./config.sh
- d. Select “**Create a new domain**” and Enter
“/u01/wins/wls1221/user_projects/domains/base_domain” as Domain Location then click on **Next**.

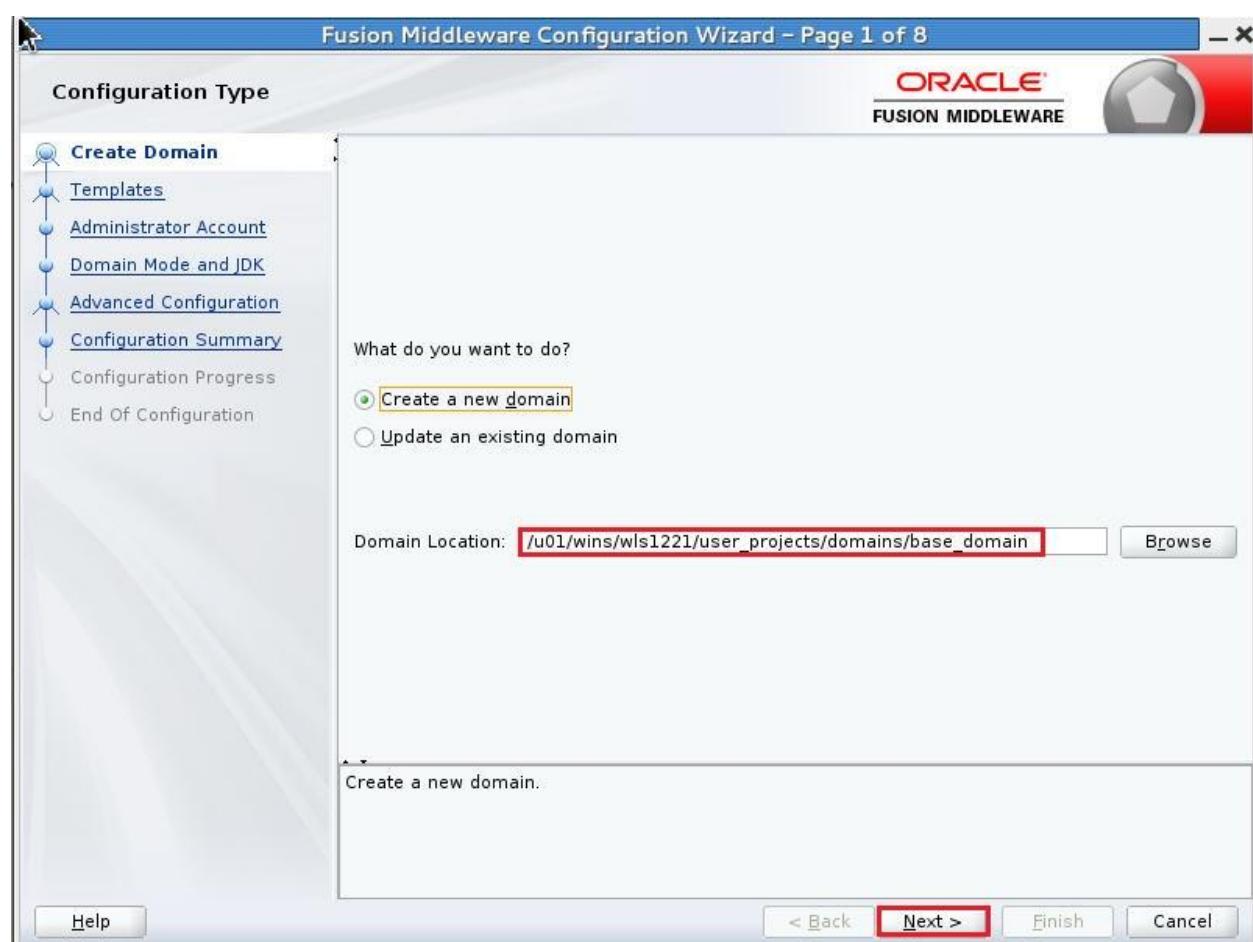


- e. Select “**Oracle Enterprise Manager –Restricted JRF-12.2.1 [em]**” as it also select the remaining required check boxes then click on **Next**.

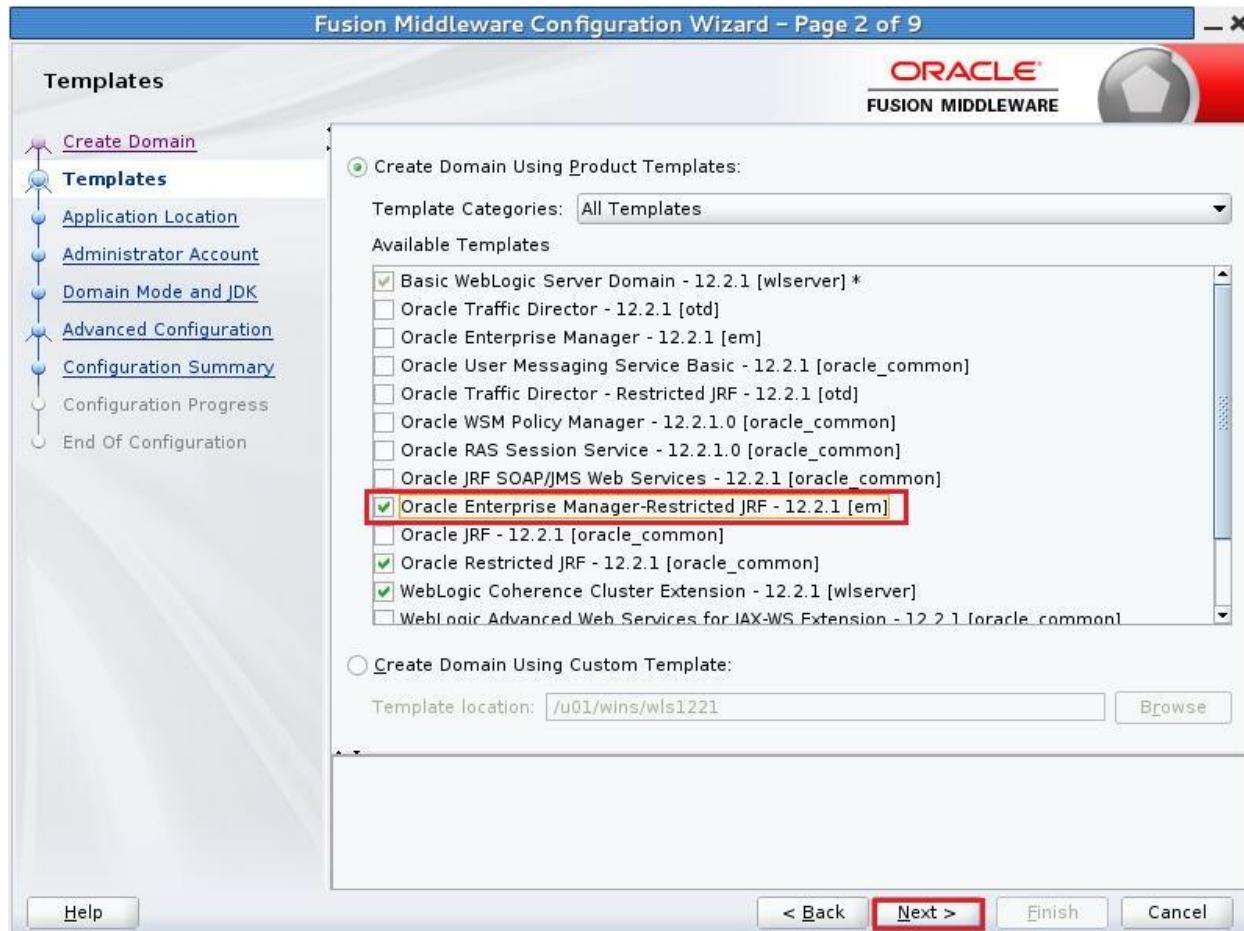

- f. Leave Default on **Application Location** then click on **Next**.
g. Enter **weblogic/welcome1** as Name/Password then click on **Next**.
h. Leave Default on **Domain Mode and JDK Screen** then click on **Next**.
i. Leave Default on **Advanced Configuration** then click on **Next**.
j. Click on **Create**.
k. Click on **Next** then click on **Finish**.

Configuration of WebLogic base_domain

- a. cd /u01/wins/wls1221/user_projects/domains/base_domain/bin/
- b. ./startNodeManager.sh
- c. In tab, Click on **Terminal -> Set Title**. Enter **base_nm** as Title then click on OK.
- d. Open a new tab.
- e. cd /u01/wins/wls1221/user_projects/domains/base_domain/bin/
- f. ./startWebLogic.sh
- g. In tab, Click on **Terminal -> Set Title**. Enter **base_admin** as Title then click on OK.
- h. Go back to Firefox and type the Fusion Middleware Control URL <http://localhost:7001/em>
- i. Enter **weblogic/welcome1** as **username/password** then click on **Login**.

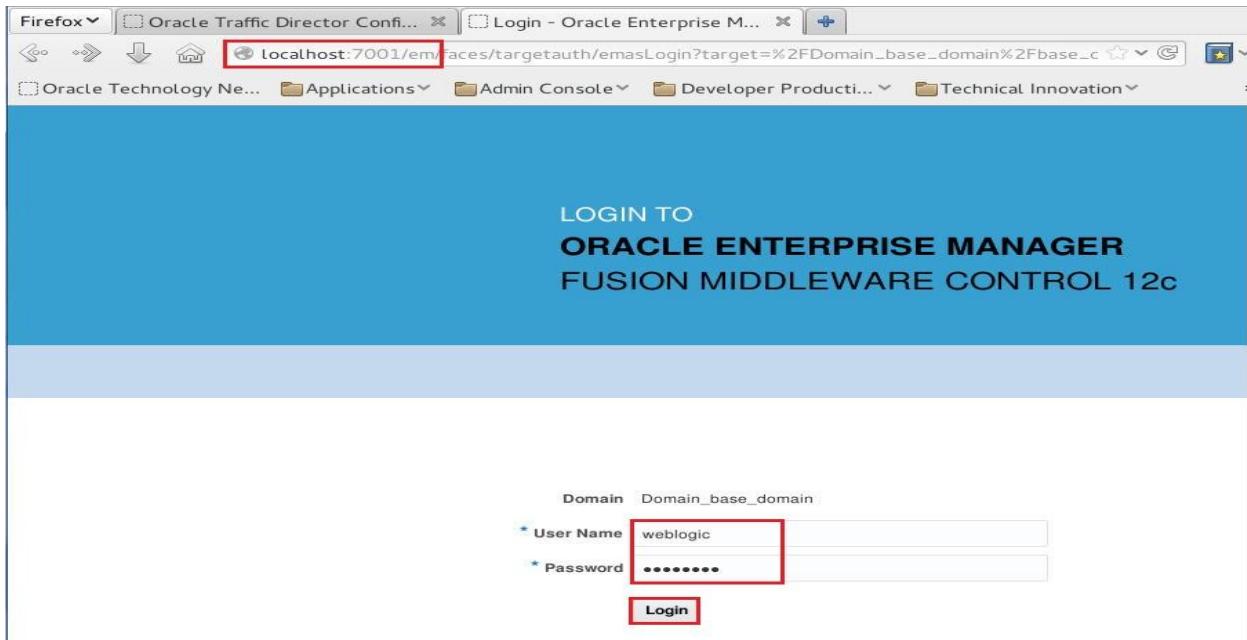

- j. Create a Machine.
 - i. Click on **WebLogic Domain-> Environment -> Machine**.
 - ii. Click on **Create**.
 - iii. Enter “**machine**” as Name, Select “**Unix**” as Machine OS, then click on **Next**.
 - iv. Leave Defaults on Node Manager Properties then click on **Create**.
 - v. Click on the Machine name **machine**.
 - vi. Click on **Monitoring** tab and verify the status as **Reachable**.

k. Create a Dynamic Cluster

- Click on **WebLogic Domain -> Environment -> Clusters.**

The screenshot shows the Oracle Enterprise Manager interface. The left sidebar has three main categories: Server, Cluster, and Deployment. Under the Cluster category, the 'Environment' link is highlighted with a red box. The main content area shows a 'Domain Server' configuration with fields for Name (AdminServer), Host (localhost), and Port (7001). A dropdown menu is open under 'Environment' with 'Clusters' highlighted by a red box. To the right is a table titled 'Clusters' with columns for Cluster, Machine, and State. The table shows one entry: 'app-cluster' with 'Machine' and 'State' both set to 'Running'. At the bottom right of the table, it says 'Servers 1 of 1'.

- Click on **Create -> Dynamic Cluster.**

The screenshot shows the 'Clusters' creation page. At the top, there's a 'Create' button with a dropdown arrow, which is also highlighted with a red box. Below the button is a table with columns: Name, Cluster, Cluster Type, Servers, Cluster Messaging Mode, Default Load Algorithm, Replication Type, Multicast Address, and Multicast Port. The 'Name' column has a row labeled 'Dynamic Cluster' with its 'Cluster' field also highlighted with a red box. Below the table, a message says 'No clusters found'.

- Enter **app-cluster** as Name then click on **Next.**

- Leave Default on **Dynamic Server Properties** page and click on **Next.**

- v. Select “**Use a single machine for all dynamic servers**” and choose the **machine**, then click on **Next**.

Create a Dynamic Cluster: Machine Bindings

Use this page to associate dynamic servers with machines.

How do you want to distribute dynamic servers across machines?

Use any machine configured in this domain
 Use a single machine for all dynamic servers

Selected Machine **machine**

Use a subset of machines in this domain

Machine Name Match Expression

- vi. Leave Default on Listen Port Bindings, and then click on **Next**.
vii. Review the Configuration and click on **Create**.

I. Start Managed Servers.

- i. Click on **WebLogic Domain -> Control ->Clusters**.

base_domain

WebLogic Domain

- Control
- Servers
- Clusters
- Deployments
- JDBC Data Sources
- Messaging
- Cross Component Wiring
- Web Services
- Other Services
- Administration
- Refresh WebLogic Domain
- Security

Clusters

Admin Server Port	Username	OTD Domain
8001	weblogic	otd_domain

- ii. Check the box near to **app-cluster** to make it highlighted and then Click on **Control -> Start -> Start Servers**.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. The title bar reads "ORACLE Enterprise Manager Fusion Middleware Control 12c". The top navigation bar includes "WebLogic Domain" and "weblogic", along with various icons and a timestamp "Nov 5, 2015 2:26:48 AM PST". The main content area is titled "Clusters (Control)". A pie chart indicates "Down (1)" status. Below it is a table with columns: Name, Cluster Type, Servers, Cluster Messaging Mode, Default Load Algorithm, and Replication Type. One row is selected, showing "app-cluster" in the Name column, "Dynamic" in Cluster Type, "2" in Servers, "Unicast" in Cluster Messaging Mode, "Round Robin" in Default Load Algorithm, and "(None)" in Replication Type. The "Control" dropdown menu is open over the "app-cluster" row, with the "Start" option highlighted by a red box.




LAB 2: MULTITENANCY CONFIGURATION

Overview:

In this lab, we are going to learn the following:

- Configuration of Virtual Target, Domain Partition and Resource Group
- Run multiple instances of Medrec application in different domain partition without modifying the application. We try to show **JNDI Isolation** for that we are using the same Medrec applications and same JNDI name for the Datasources, connection factory and Distributed queue in both the domain partition.
- Run Day trader application which is build by WebSphere to WebLogic 12.2.1.
- You don't need to modify your application to run in Multitenant environment. So no special application development needed.

The final deployment architecture will look like the below where we will create three domain partitions .Deploy Medrec application in domain partition dp1 and dp2. And Day Trader application on domain partition dp3.

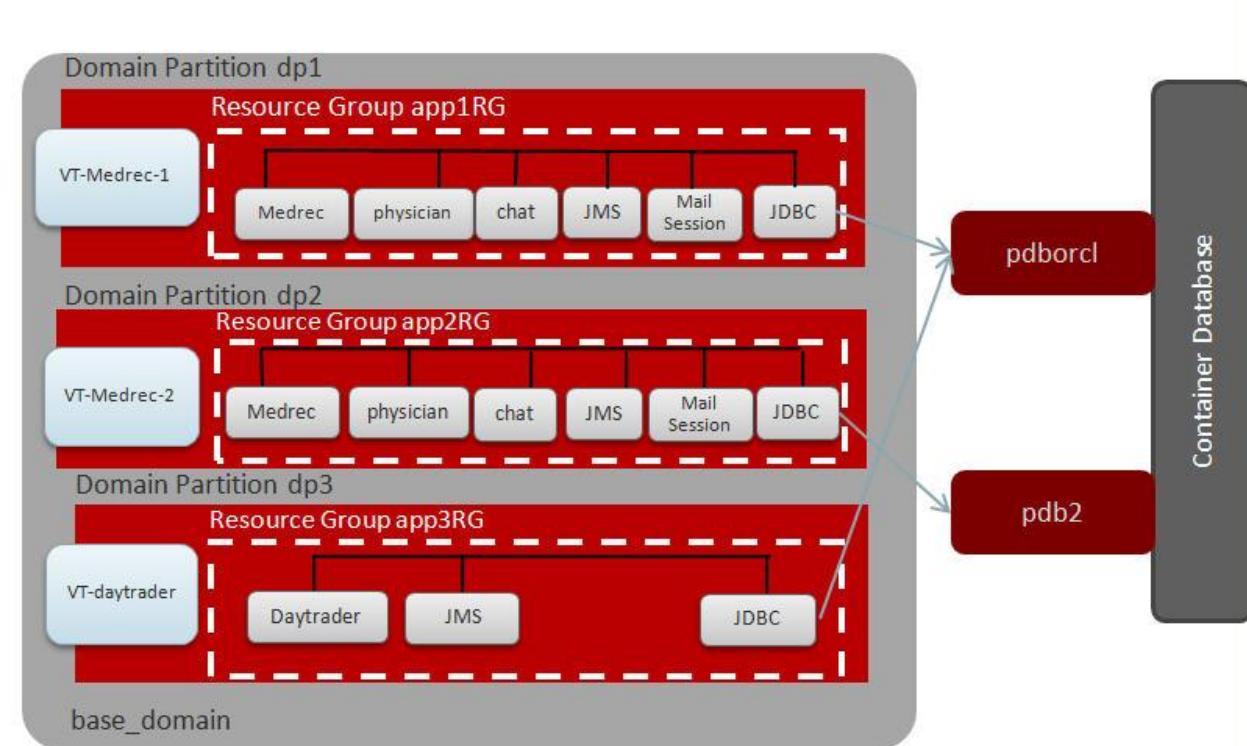

Configuration of Medrec Application in Domain Partition 1

In the next step we are creating the below configuration for Medrec application in domain partition dp1.

Virtual Target: VT-Medrec-1
Domain Partition: dp1
Resource Group app1RG
app1RG:
 Datasource:
 Name: MedRecGlobalDataSourceXA
 JNDI Name: jdbc/MedRecGlobalDataSourceXA
 Mail Session:
 Name: MedRecMailSession
 JNDI Name: mail/MedRecMailSession
 Persistence Store: MedRec-fs
 JMS Server: MedRecJMSServer
 JMS Module: MedRecModule
 MedRecModule:
 Subdeployment: MedRecJMS
 Connection Factory:
 Name: MedRecConnectionFactory
 JNDI Name: com.oracle.medrec.jms.connectionFactory
 Distributed Queue:
 Name: PatientNotificationQueue
 JNDI Name: com.oracle.medrec.jms.PatientNotificationQueue
Applications: medrec.ear
 physician.ear
 chat.war

- a. Open a new tab.
- b. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2/
- c. **./Medrec1DB.sh** (It creates the required database user and populate sample data into database)
- d. Close the tab.
- e. In Enterprise Manager, Click on **WebLogic Domain -> Environment -> Virtual Targets**.

The screenshot shows the Oracle Enterprise Manager interface. The left sidebar has a tree view with nodes like 'Clusters' (expanded), 'Deployment' (selected), 'Virtual Hosts' (selected), and 'Virtual Targets'. The main content area shows a list of virtual targets under 'Virtual Targets' with columns: Cluster Messaging Mode, Default Load Algorithm, and Replication Type. A tooltip above the list says 'the selected Server(s):app-cluster-2, app-cluster-1'. The status bar at the bottom right shows 'Nov 5, 2015 2:26:48 AM PST'.

Cluster Messaging Mode	Default Load Algorithm	Replication Type
Unicast	Round Robin	(None)

Clusters 1 of 1

- f. Click on **Create**.
- g. Enter **VT-Medrec-1** as Name and **/dp1** as Uri Prefix and Add **localhost** as Hosts then click on **Next**.

The screenshot shows the 'Create Virtual Target: General' dialog in Oracle Enterprise Manager. It's Step 1 of 2. The 'General' tab is selected. The 'Targets' tab is also visible. The 'Name' field contains 'VT-Medrec-1' and the 'Uri Prefix' field contains '/dp1'. Under the 'Hosts' section, there's a table with a single row containing 'localhost'. Buttons for 'Back', 'Step 1 of 2', 'Next', and 'Cancel' are at the top right.

Host Name
localhost

h. Select Cluster **app-cluster** as Target then click on **Create**.

base_domain i

General Targets

Create Virtual Target: Targets

Choose a server or cluster to be associated with this virtual target.

Cluster app-cluster

Server

Back Step 2 of 2 Next **Create** Cancel

i. Click on **WebLogic Domain -> Environment -> Domain Partitions**.

base_domain i

WebLogic Domain ▼ weblogic ▼

Nov 5, 2015 2:34:08 AM PST

/Domain ▼

Virtua
A virtual allowing use by a

View ▼

Nar

WebLogic Domain ▼

Home

Monitoring

Diagnostics

Control

Logs

Environment

Deployments

JDBC Data Sources

Messaging

Cross Component Wiring

Web Services

Other Services

Administration

Refresh WebLogic Domain

Security

Servers

Server Templates

Clusters

Machines

Domain Partitions

OTD Runtimes

Resource Groups

Resource Group Templates

Partition Work Managers

Resource Consumption Managers

Used By

Log File Name

Virtual Targets 1 of 1

- j. Click on “**Enable Lifecycle Manager**”.
- k. Go back to base_admin terminal, press CTRL+C, to stop the admin server.
- l. `./startWebLogic.sh`
- m. Go back to Firefox, and type the Fusion Middleware Control Console URL <http://localhost:7001/em>.
- n. Enter **weblogic/welcome1** as User Name/Password then Click on **Login**.
- o. Click on **WebLogic Domain -> Environment -> Domain Partition**.
- p. Click on **Create**.
- q. Enter **dp1** as Name then click on Next.

Create Domain Partition: General

Use this page to specify general attributes for this domain partition.

* Name dp1

Security Realm

Primary Identity Domain

Load Balancer Configuration

If you wish to use a load balancer to front-end this domain partition, choose an Oracle Traffic Director runtime from the list of registered runtimes shown below. If you wish to register a new OTD runtime, please use the Environment->OTD Runtimes menu item on the WebLogic Domain menu.

Use OTD for load balancing

OTD Runtime

- r. Check the left box near **VT-Medrec-1** and also check the box for **Set as Default** then click on **Next**.

Select	Virtual Target	Set as Default
<input checked="" type="checkbox"/>	VT-Medrec-1	<input checked="" type="checkbox"/>

- s. Enter **app1RG** as Resource Group name and **None** as Resource Group Template, Move the **VT-Medrec-1** virtual target to **Selected targets** then click on **Next**.

Create Domain Partition: Resource Group

A resource group needs to be created within a partition before you can deploy applications or resources. The resource group can optionally extend a resource group template specified at the domain level.

* Resource Group Name **app1RG**

Resource Group Template **None**

Targets for the Resource Group Select a target for the resource group from the list of available targets. If the partition has a default target specified, the resource group will implicitly inherit that target.

Available Targets	Selected Targets
VT-Medrec-1	VT-Medrec-1

- t. Verify the configuration and click on **Create**.
u. Check the box near **dp1** and click on **Control -> Start**. Once you notice the message “**Partition state after the operation is RUNNING**” then Click on Close.

Domain Partitions

Domain partitions are the building blocks of WebLogic server multi-tenancy (MT). Multi-tenancy permits multiple client organizations to share a domain, improving efficiency and reducing operation costs. Before creating a domain partition, you must first create one or more virtual targets. Look at the Getting Started topics for more information.

► Getting Started with Multi-Tenancy

Hide Pie Chart

Name	Status	OTD Partition	Realm	Default Targets	Available Targets
dp1	Down	OTD Partition	Realm	Default Targets	Available Targets

Control ▾ Start



v. Click on the Domain Partition **dp1**.

Name	Status	State	OTD Partition	Realm	Default Targets	Available Targets
dp1		Running			VT-Medrec-1	VT-Medrec-1

w. Click on Domain Partition -> Administration -> Resource Group.

The screenshot shows the ORACLE Enterprise Manager Fusion Middleware Control 12c interface. The left sidebar has sections for Monitoring, Resource Groups, Deployment, and Administration. The "Administration" section is currently selected, with its sub-options (Security, System MBean Browser, Target Sitemap) visible. The main content area is for the domain partition "dp1". Under "dp1", there are tabs for "Domain Partition" (which is selected), "Start Up", and "Shut Down". The "Domain Partition" tab has a sub-menu with "Home", "Monitoring", "Diagnostics", "Control", "Logs", "Deployments", "JDBC Data Sources", "Messaging", "Coherence Caches", "Web Services", "Other Services", and "Administration". The "Administration" sub-menu is expanded, showing "Resource Groups" (which is selected and highlighted with a red box), "Load Balancer Configuration", "Resource Overrides", "Resource Sharing", "Coherence Caches", and "Notes". To the right of the menu, there are two sections: "JDBC and JTA Usage" and "Resource Usage". The "JDBC and JTA Usage" section shows metrics like Open JDBC Connections (0), JDBC Connection Creates (per minute) (0.00), Active Transactions (0), Transaction Commits (per minute) (0.00), and Transaction Rollbacks (per minute) (0.00). The "Resource Usage" section shows CPU Usage (%) as Unavailable and Open Files as Unavailable. At the top right, there are navigation buttons for "WebLogic Domain", "weblogic", and "Auto Refresh Off". The date and time displayed are Nov 5, 2015 2:42:47 AM PST.


- x. Click on Resource Group **app1RG**.
- y. Creation of Datasource.
 - i. Select the **Services** tab.
 - ii. Choose JDBC tab, click on **Create -> Generic Data Source**.

The screenshot shows the Oracle Enterprise Manager interface for a WebLogic Domain named 'weblogic'. The URL is /Domain_base_domain/base_domain/dp1 > Resource Groups > Resource Group : app1RG. The 'Services' tab is active, and the 'JDBC' tab is selected. In the center, there's a table titled 'JDBC Data Sources' with columns: Name, JNDI Name, Type, and Targets. A modal dialog is open over the table, showing options: 'Create' (with 'Generic Data Source' highlighted), 'Create Like', 'Delete', and 'Detach'. Below the table, it says 'No system d' and 'Columns Hidden 4'. At the bottom right of the modal, it says 'JDBC Data Sources 0 of 0'.

- iii. Enter **MedRecGlobalDataSourceXA** as Data Source Name and **jdbc/MedRecGlobalDataSourceXA** as JNDI Name, and then click on Select.

The screenshot shows the 'Create a JDBC Data Source: Data Source Properties' step of a wizard. The tabs at the top are: Data Source Properties (selected), Connection Properties, Transaction Properties, Select Targets, and Review. The main area shows the configuration for a JDBC data source. It includes fields for Data Source Name ('MedRecGlobalDataSourceXA'), Scope ('Resource group "app1RG" in domain partition "dp1"'), Type ('Generic'), Database Type ('Oracle'), Driver Class Name ('oracle.jdbc.OracleDriver'), and JNDI Name ('jdbc/MedRecGlobalDataSourceXA'). A 'Select...' button is located next to the Driver Class Name field, and it is highlighted with a red box. At the bottom right, there are buttons for Back, Step 1 of 5, Next, and Cancel.


- iv. Select **Oracle** as Database Type and “**Oracle’s Driver (Thin XA) for service connections; Versions: Any**” as JDBC Driver then click on OK.

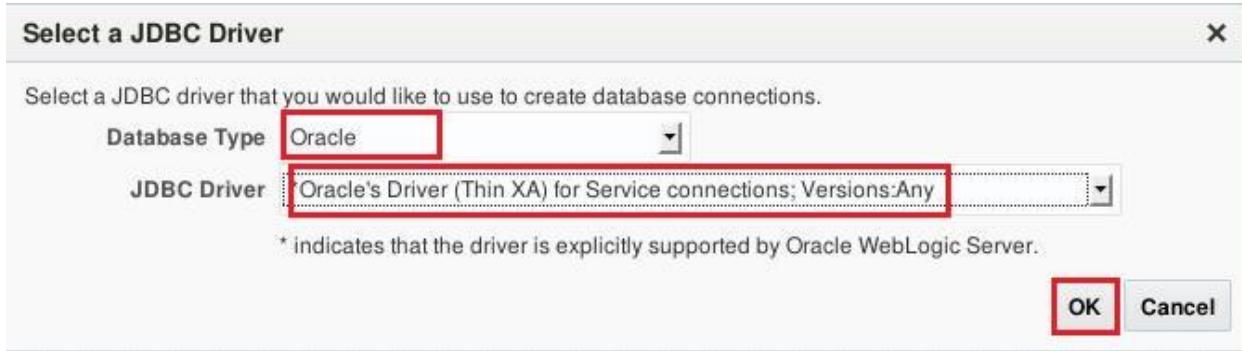

- v. Click on **Next**.
 vi. Click on **Generate URL and Properties** and Enter the following:

Host Name:	localhost
Listen Port:	1521
Database Name:	pdborcl
User Name:	medrec1
Password:	medrec1
Confirm Password	medrec1

Click OK.

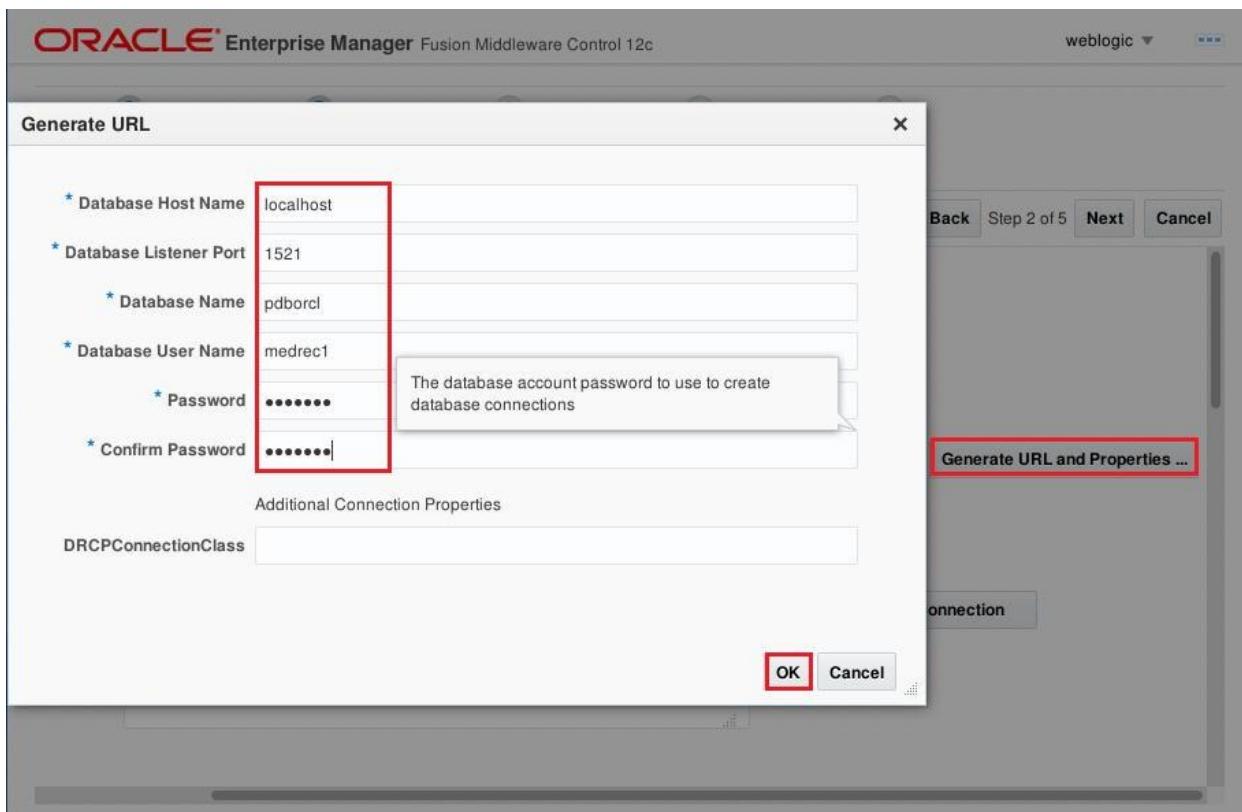

vii. Click on **Test Database Connection** to verify the connection. Click **Next**.

Create a JDBC Data Source: Connection

Use this page to define the connection properties for this JDBC Data Source.

Database Connection Information

Driver: oracle.jdbc.xa.client.OracleXADataSource

Class: oracle.jdbc.xa.client.OracleXADataSource

Name:

* Database URL: jdbc:oracle:thin:@//localhost:1521/pdborcl

Password: *****

Confirm Password: *****

SQL ISVALID

Test Table Name or SQL Statement

Properties

localhost:7001/em/faces/as-emas-createDS_taskflow/as/jdbc/createDSStep2#

viii. Leave Default on **Transaction Options** and click on **Next**.

ix. Verify the configuration and click on **Create**.

z. Adding User to Default Realm.

i. Click on **Weblogic Domain -> Security -> Users and Groups**.

base_domain

WebLogic Domain

Confirmation

JDBC Data Source "MedRecGlobalDataSourceXA" has been created successfully. All changes have been saved.

/Domain_base_domain/base_domain > Resource Groups > Resource Group : app1RG

Resource Group : app1RG

General Deployments Services Targets Monitoring Control Notes

JDBC Messaging Mail Persistent Stores Foreign JNDI Providers Diagnostics

This page lists the JDBC system data sources that have been created in this resource group. You can edit, delete, or detach them.

View Create Create Like Delete Detach

Name	JNDI Name	Security Realms
MedRecGlobalDataSourceXA	jdbc/MedRecGlobalDataSourceXA	Users and Groups Keystore

Columns Hidden 4

WebLogic Domain weblogic

- Home
- Monitoring
- Diagnostics
- Control
- Logs
- Environment
- Deployments
- JDBC Data Sources
- Messaging
- Cross Component Wiring
- Web Services
- Other Services
- Administration
- Refresh WebLogic Domain
- Security**
- System MBean Browser
- WebLogic Server Administration Console

Target Sitemap

- ii. In **Users** tab, click on **Create**.

Users and Groups

This page displays information about the users and groups that have been configured in the selected security realm in this WebLogic Server domain.

Select a Realm myrealm

Default Realm for This WebLogic Domain true

Users Groups

Create Delete Detach

Name	Description	Provider
LCMUser	This is the default service account ...	DefaultAuthenticator
OracleSystemUser	Oracle application software syste...	DefaultAuthenticator
weblogic	This user is the default administrator.	DefaultAuthenticator

Columns Hidden 1

Users 3 of 3

- iii. Enter the following then click on **Create**.

Name: administrator
 Description: Medrec Admin
 Provider: Default Authenticator
 Password: administrator123
 Confirm Password: administrator123

aa. Configuring Mail Session.

- i. Click on **Weblogic Domain ->Environment ->Domain Partition**.
- ii. Click on Domain Partition **dp1**.
- iii. Click on **Domain Partition -> Other Services -> Mail Sessions**.

ORACLE® Enterprise Manager Fusion Middleware Control 12c

WebLogic Domain | weblogic

dp1

Domain Partition Start Up Shut Down

Nov 5, 2015 7:09:41 AM PST

Monit

- Home
- Monitoring
- Diagnostics
- Control
- Logs

Resou

- Deployments
- JDBC Data Sources
- Messaging
- Coherence Caches
- Web Services
- Other Services**
- Administration
- Security
- System MBean Browser
- Target Sitemap

Start Up Shut Down

General

State: Running

Default Targets: VT-Medrec-1

Available Targets: VT-Medrec-1

JDBC and JTA Usage

Open JDBC Connections: 0

JDBC Connection Creates (per minute): 0.00

Active Transactions: 0

Work Manager

Requests (per minute): 6.41

Pending Requests: 0

Transaction Commits (per minute): 0.00

Transaction Rollbacks (per minute): 0.00

Resource Usage

CPU Usage (%): Unavailable

Open Files: Unavailable

Persistent Stores

Mail Sessions

Foreign JNDI Providers

Current Messages: 0

iv. Click on **Create**.

v. Enter the following and click on **Next**.

Name: MedRecMailSession
Scope: Leave as default
JNDI Name: mail/MedRecMailSession

The screenshot shows the 'Create a Mail Session: General Configuration' page. The 'General Configuration' tab is active. The 'Name' field contains 'MedRecMailSession'. The 'Scope' dropdown shows 'Domain Partition Resource Group' with 'app1RG in partition dp1' selected. The 'JNDI Name' field contains 'mail/MedRecMailSession'. Below these fields are three empty input fields for 'Session Username', 'Session Password', and 'Confirm Session Password'. At the top right, there are 'Back', 'Step 1 of 3', 'Next' (which is highlighted with a red box), and 'Cancel' buttons.

vi. Click on **Create**.

bb. Configuring JMS Server.

i. Click on **Domain Partition** -> **Messaging** -> **JMS Servers**.

The screenshot shows the 'Domain Partition' section of the Oracle Enterprise Manager interface. The 'Messaging' option under the 'Domain Partition' menu is selected and highlighted with a red box. A tooltip message 'as been created successfully. All changes have been activated.' is displayed above the 'JMS Servers' link, which is also highlighted with a red box. The 'JMS Servers' link is currently being hovered over, indicated by a cursor icon. The right panel displays information about Mail Sessions and JMS Resources.

- ii. Click on **Create**. Enter **MedRecJMSServer** as Name then click on **Create a Store** -> **File Store**.

JMS servers act as management containers for the queues and topics in JMS modules that are targeted to them. A JMS server's primary responsibility for its destinations is to maintain information on what persistent store is used for any persistent messages that arrive on the destinations, and to maintain the states of durable subscribers created on the destinations.

Use this page to define the general configuration parameters for this JMS server.

* Name

Scope Domain Partition Resource Group

Persistent Store

- iii. Enter **MedRec-fs** as Name then click on **Next**. Click on **Create**.
 iv. In **JMS Server: General Setting**, Select the newly created file store as persistent store then click on **Next**.

Information
Persistent store "MedRec-fs" has been created successfully. All changes have been activated.

JMS servers act as management containers for the queues and topics in JMS modules that are targeted to them. A JMS server's primary responsibility for its destinations is to maintain information on what persistent store is used for any persistent messages that arrive on the destinations, and to maintain the states of durable subscribers created on the destinations.

Use this page to define the general configuration parameters for this JMS server.

* Name

Scope Domain Partition Resource Group

Persistent Store

v. Click on **Create**.

cc. Configure JMS Module.

i. Click on **Domain Partition -> Messaging -> JMS Resources and Modules**.

The screenshot shows the Oracle Enterprise Manager interface for a WebLogic Domain named 'weblogic'. The left sidebar is expanded to show the 'Domain Partition' section, which is currently selected. Under 'Messaging', the 'JMS Resources and Modules' link is highlighted with a red box. A tooltip message 'A new JMS module has been created successfully. All changes have been activated.' is displayed above the main content area. The main content area displays a table titled 'Resource Group' with one entry: 'app1RG'. At the bottom right of the main content area, it says 'JMS Servers 1 of 1'.

ii. Under the **JMS Modules** tab, click on **Create**.

The screenshot shows the same Oracle Enterprise Manager interface as the previous one, but now the 'JMS Modules' tab is selected. The 'Create' button in the top navigation bar is highlighted with a red box. Below the navigation bar, there is a message: 'To configure and manage JMS modules, use the [WebLogic Server Administration Console](#)'. The main content area displays a table with columns: Name, Resource Group, Queues, Topics, Connection Factories, Distributed Queues, Distributed Topics, Foreign Servers, Quotas, and Hand. A note at the bottom left says 'The table is empty'. At the bottom right, it says 'JMS Modules 0 of 0'.

- iii. Enter **MedRecModule** as Name then click on **Next**. Click on **Create**.
- iv. Under **JMS Modules** tab, click on **MedRecModule**.

JMS Resources and Modules

To configure and manage JMS modules, use the [WebLogic Server Administration Console](#).

Name	Resource Group	Queues	Topics	Connection Factories	Distributed Queues	Distributed Topics	Foreign Servers	Quotas	Handlers
MedRecModule	app1RG	0	0	0	0	0	0	0	

Columns Hidden 2 JMS Modules 1 of 1

- v. Under **Subdeployment** tab, click on **Create**.

JMS Module: MedRecModule

To configure and manage this JMS module, use the [WebLogic Server Administration Console](#).

Name	Resources	Targets
The table is empty		

- vi. Enter **MedRecJMS** as Name and Select the box near **MedRecJMSServer** then click on **Create**.

Create a Subdeployment

Subdeployment Name **Create** **Cancel**

Select targets for this subdeployment.

JMS Servers

Select Name

MedRecJMSServer

SAF Agents

Select Name

No data to display

- vii. Under **General** tab, click on **Create**.

JMS Module: MedRecModule

To configure and manage this JMS module, use the [WebLogic Server Administration Console](#).

General Subdeployments Notes

This page displays general information about a JMS system module and its resources. It also allows you to configure new resources and access existing resources.

Name: MedRecModule


Scope: Resource group "app1RG" in domain partition "dp1"

Descriptor File Name: partitions/dp1/jms/medrecmodule-jms.xml

This page summarizes the JMS resources that have been created for this JMS system module, including queue and topic destinations, connection factories, JMS templates, destination sort keys, destination quota, distributed destinations, foreign servers, and store-and-forward parameters.


View **Create** **Delete** **Detach**

viii. Select box near **Connection Factory** then click on **Next**.

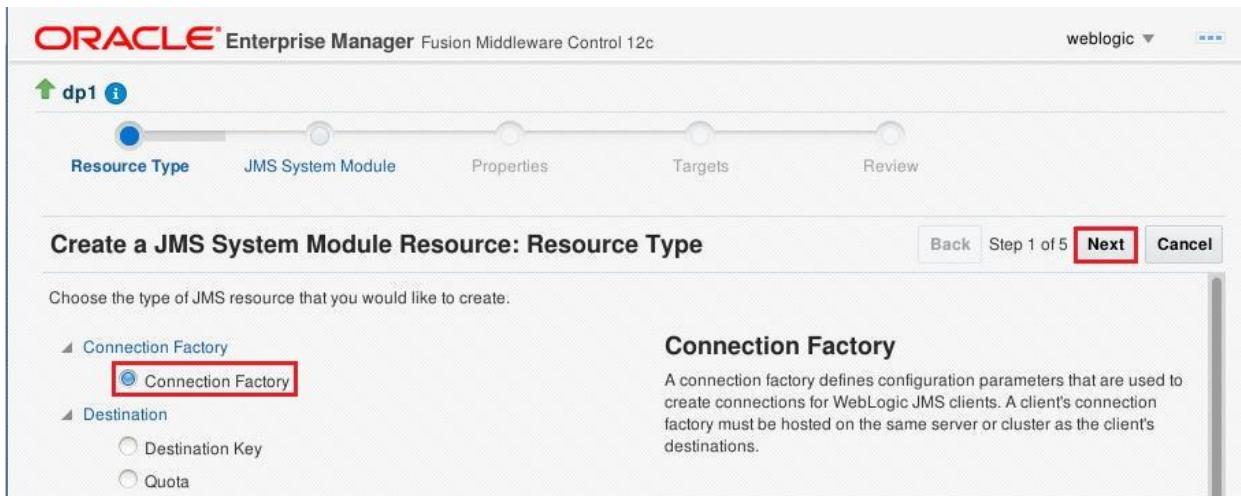

The screenshot shows the Oracle Enterprise Manager interface for creating a JMS System Module Resource. The top navigation bar indicates 'ORACLE Enterprise Manager Fusion Middleware Control 12c' and 'weblogic'. The main title is 'Create a JMS System Module Resource: Resource Type'. A progress bar at the top shows five steps: 'Resource Type' (selected), 'JMS System Module', 'Properties', 'Targets', and 'Review'. Below the title, a sub-header says 'Choose the type of JMS resource that you would like to create.' A tree view on the left lists 'Connection Factory' (selected) and 'Destination'. Under 'Connection Factory', 'Connection Factory' is selected and highlighted with a red box. To the right, a detailed description of 'Connection Factory' is provided: 'A connection factory defines configuration parameters that are used to create connections for WebLogic JMS clients. A client's connection factory must be hosted on the same server or cluster as the client's destinations.' At the bottom right of the screen are 'Back', 'Step 1 of 5', 'Next' (highlighted with a red box), and 'Cancel' buttons.

- ix. Leave Default in **JMS System Module** Page then click on **Next**.
x. Enter **MedRecConnectionFactory** as Name and
com.oracle.medrec.jms.connectionFactory as JNDI Name then click on **Next**. Click on **Create**.

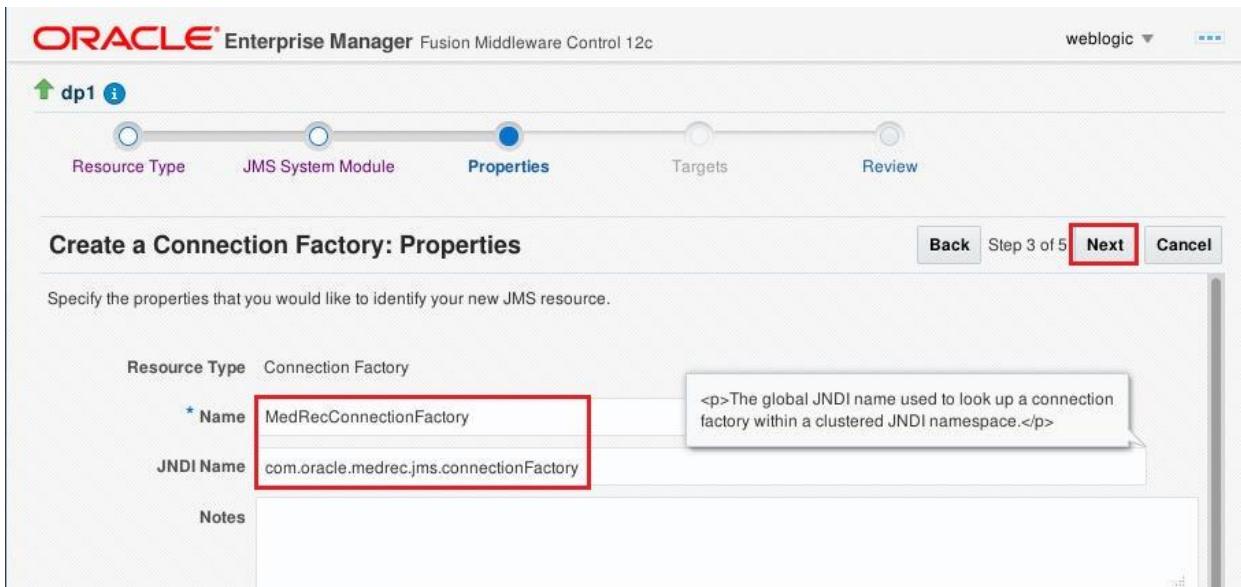

The screenshot shows the Oracle Enterprise Manager interface for creating a Connection Factory. The top navigation bar indicates 'ORACLE Enterprise Manager Fusion Middleware Control 12c' and 'weblogic'. The main title is 'Create a Connection Factory: Properties'. A progress bar at the top shows four steps: 'Resource Type' (selected), 'JMS System Module', 'Properties' (selected), 'Targets', and 'Review'. Below the title, a sub-header says 'Specify the properties that you would like to identify your new JMS resource.' A table shows the properties:

Resource Type	Connection Factory
* Name	MedRecConnectionFactory
JNDI Name	com.oracle.medrec.jms.connectionFactory
Notes	

A tooltip for the 'JNDI Name' field is displayed, stating: '<p>The global JNDI name used to look up a connection factory within a clustered JNDI namespace.</p>'. At the bottom right of the screen are 'Back', 'Step 3 of 5', 'Next' (highlighted with a red box), and 'Cancel' buttons.

- xi. Under **General** tab, Click on **Create**.
- xii. Select **Uniform Distributed Queue** then click on **Next**.

Create a JMS System Module Resource: Resource Type

Choose the type of JMS resource that you would like to create.

- Resource Type: Uniform Distributed Queue
- JMS System Module
- Properties
- Targets
- Review

Uniform Distributed Queue

A uniform distributed topic is a logical topic that references a set of automatically generated JMS topic instances, each hosted on a different JMS server.

Note: depending on the type of resource selected, you will be prompted to enter basic information for the new JMS resource to be created in next step. For targetable resources, like stand-alone queues and topics, connection factories, distributed queues and topics, foreign servers, and SAF import destinations, you can also proceed to "Targets" step for selecting the appropriate targeting policy. For untargetable resources, like destination keys, quotas, templates, SAF error handling, and remote SAF context, the "Targets" step will be skipped.

xiii. Click on **Next**.

xiv. Enter the following and click on **Next**.

Name: PatientNotificationQueue

JNDI Name: com.oracle.medrec.jms.PatientNotificationQueue

Create a Uniform Distributed Queue: Properties

Specify the properties that you would like to identify your new JMS resource.

- Resource Type: Uniform Distributed Queue
- Properties
- Targets
- Review

Name: PatientNotificationQueue

Notes: *<p>The name used to bind a virtual destination to the JNDI tree. Applications can use the JNDI name to look up the virtual destination.</p>*

JNDI Name: com.oracle.medrec.jms.PatientNotificationQueue

Template: (None)

- xv. Click on **Create**. Click on **PatientNotificationQueue**, Under **Targeting**, Select **Subdeployment targeting as Targeting Policy** and **MedRecJMS** as **Subdeployment** then click on **Apply**.

The screenshot shows the Oracle Enterprise Manager interface for configuring a JMS resource. In the 'Targeting' section, the 'Subdeployment targeting' radio button is selected, and the 'Subdeployment' dropdown is set to 'MedRecJMS'. A red box highlights the 'Subdeployment targeting' selection.

Note: You must restart domain partition before going to deploy Medrec Application.

- Click on Change Center -> View Restart Checklist.

The screenshot shows the Oracle Enterprise Manager interface with a context menu open over a domain partition named 'dp1'. The 'View Restart Checklist' option is highlighted with a red box. Other menu items include Edit Sessions, Lock & Edit, View Change List, View & Resolve Conflicts, Release Configuration, Activate Changes, Undo All Changes, and Console.

b. Select the box near to dp1 then click on Restart.

Restart Checklist			
This page lists servers, domain partitions, system components, and other resources that must be restarted for configuration changes to take effect. To restart, select the resource you would like to restart and click Restart button.			
Name	Resource Type	Targets	Status of Last Action
dp1	Domain Partition		START (TASK COMPLETED)

c. On Confirmation Screen, Click on Restart.

dd. Deployment of Medrec Application.

i. Click on **WebLogic Domain -> Environment -> Resource Groups**.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. On the left, there's a navigation bar with 'WebLogic Domain' set to 'weblogic'. Below it, a sidebar lists various management options like Home, Monitoring, Diagnostics, Control, Logs, Environment (which is highlighted with a red box), Deployments, JDBC Data Sources, Messaging, Cross Component Wiring, Web Services, Other Services, Administration, Refresh WebLogic Domain, Security, System MBean Browser, and WebLogic Server Administration Console. The main content area is titled 'Uniform Distributed Queue: PatientNotificationQueue' and contains tabs for Configuration, Monitoring, and Notes. Under Configuration, there are sections for General, Advanced Configuration, Delivery Failure, and a note about defining general configuration parameters. A table shows settings for 'PatientNotificationQueue': Name (PatientNotificationQueue), Scope (Resource g), JNDI Name (com.oracle), and Template (None). A cursor is hovering over the 'Resource Groups' link in the sidebar.

- ii. Click on Resource Group **app1RG**, click on **Deployments** tab.
- iii. Click on **Deployment -> Deploy**.

The screenshot shows the Oracle Enterprise Manager interface for a WebLogic Domain. The top navigation bar includes 'WebLogic Domain' and 'weblogic'. The main title is 'Resource Group : app1RG'. Below it, the 'Deployments' tab is selected. In the center, there's a table with columns: Name, Status, State, Health, and Type. A context menu is open over the table, with 'Deploy' highlighted. Other options in the menu include 'Redeploy', 'Undeploy', and 'Fetch Deployment Plan'.


- iv. Select “Archive or exploded directory is on the server where Enterprise Manager is running” then click on **Browse**. Specify the location of **medrec.ear** from **/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2** then click on **OK**.

The screenshot shows the 'Deploy Java EE Application: Select Archive' wizard. Step 1 of 4. The 'Archive or Exploded Directory' section is active. It shows a radio button for 'Archive is on the machine where this Web browser is running.' and another for 'Archive or exploded directory is on the server where Enterprise Manager is running.' The second option is selected. Below it, a text input field contains the path '/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2/medrec.ear'. A 'Browse...' button is located to the right of the input field. A vertical scroll bar is visible on the right side of the form.

- v. Click on **Next** then click on **Deploy**. Click on Close.
- vi. Deploy **physician.ear** file similarly from the **/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2** location.
- vii. Deploy **chat.war** file similarly from the **/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2** location.

Accessing Medrec Application in Domain Partition dp1

- i. Go to Firefox and type the URL: <http://localhost:7101/dp1/medrec/>
- ii. Click on Getting Started.

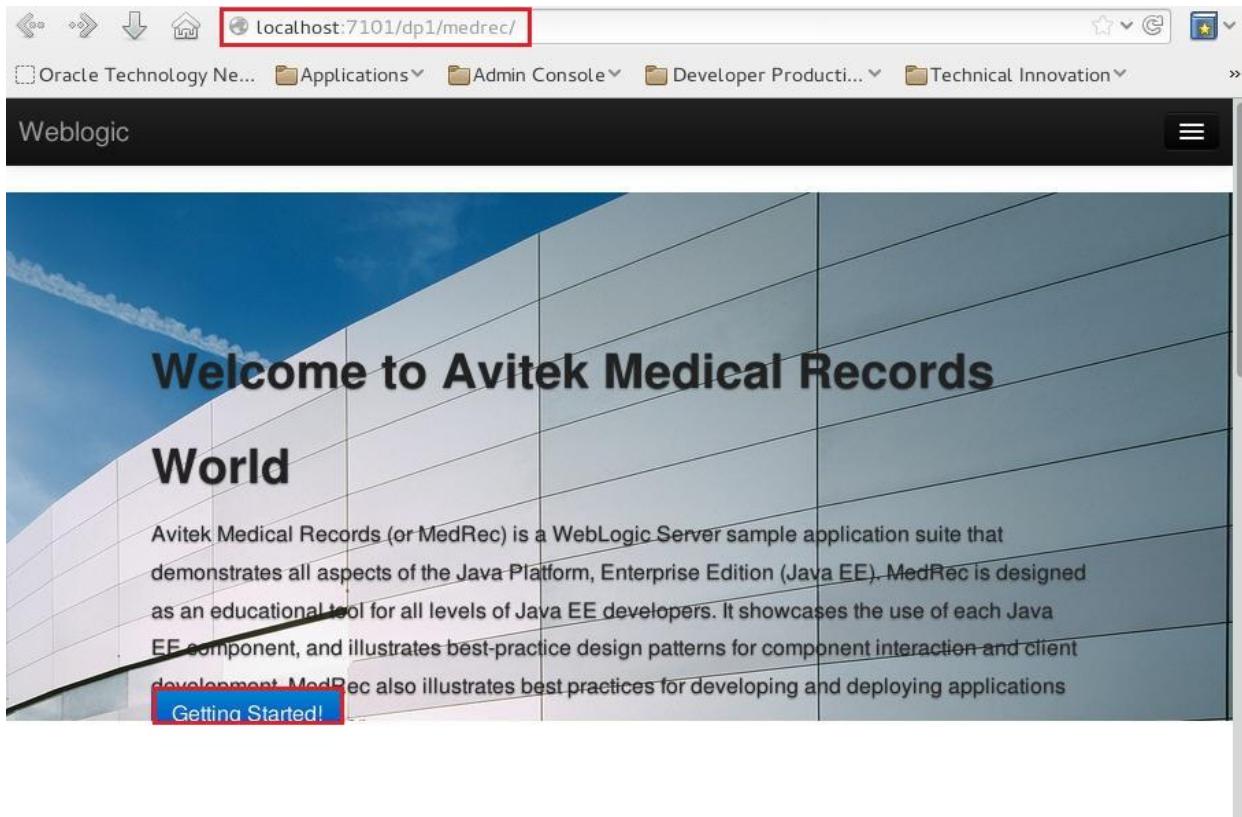

- iii. Under Patient, Click on **I'm New Here**
- iv. Enter the following or any other data then click on Submit.

Email:	weblogic@oracle.com
Password:	welcome1
Confirm Password:	welcome1
First Name:	Ankit
Last Name:	Pandey
Gender:	Male
DOB:	Jun 23, 1988
SSN:	123456788

Note: Make sure you not use 123456789 as SSN Number.

- v. Click on **Getting Started** again on Medrec Home Page.
- vi. Under Administrator, Click on **Login**.

- vii. Enter **administrator/administrator123** as username and password then click on **Sign In**.



The image shows a login interface titled "Administrator". The main message is "Please sign in.". There are two input fields: "Username" containing "administrator" and "Password" containing a series of dots. A blue "Sign In" button is at the bottom right.

- viii. Under **Pending Requests**, click on **Go**.
ix. Click on the Email Id, and then click on **Approve**.
x. Click on Logout. Click on Logout again.
xi. You can login as weblogic@oracle.com/welcome1 as username/password as Patient.
xii. You can view your record summary, and you can also have interaction with physician.



Patient look up and view your visit and prescription history and edit your profile information.

The Patient application allows patients to log in, edit their profile information, or request that their profile be added to the system. Patients can also view prior medical records of visits with their physician.

[Login](#)

[I'm New Here](#)

Configuration of Medrec Application in Domain Partition 2

In the next step we are creating the below configuration for Medrec application in domain partition dp2. We are using the same Medrec applications and same JNDI name for the Datasources, connection factory and Distributed queue but we will connect to different database. So there are two benefits of Multitenancy.

- In a domain, you can deploy the same application in two different domain partitions and there will be no JNDI conflict. You do not have to make any changes in application.
- In single domain, you can have same application deployed in two different domain partitions and connected to two databases. So both the application will have different Set of Users in our case or different set of Application Specific Data.

Virtual Target: VT-Medrec-2

Domain Partition: dp2

Resource Group app2RG

app1RG:

Datasource:	MedRec2GlobalDataSourceXA, jdbc/MedRecGlobalDataSourceXA
Mail Session:	MedRecMailSession, mail/MedRecMailSession
Persistence Store:	MedRec2-fs
JMS Server:	MedRec2JMSServer
JMS Module:	MedRec2Module
MedRecModule:	
Subdeployment:	MedRec2JMS
Connection Factory:	MedRec2ConnectionFactory, com.oracle.medrec.jms.connectionFactory
Distributed Queue:	PatientNotificationQueue com.oracle.medrec.jms.PatientNotificationQueue
Applications:	medrec.ear physician.ear chat.war

The Scripts MedrecInDP2.sh creates the Virtual Target, Domain Partition, Resource Group, JDBC Datasource, JMS Server, JMS Module, Distributed Queue and Connection Factory then deploys the medrec.ear, physician.ear and chat.war.


- a. Open a new tab.
- b. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2
- c. ./Medrec2DB.sh (It creates the required user medrec2 in pdb2 and populates the sample data.)
- d. ./MedrecInDP2.sh
- e. Go back to Fusion Middleware Control <http://localhost:7001/em>.
- f. Verify the creation of the following resources.
 - i. Click on **WebLogic Domain ->Environment ->Virtual Target**. Here we have **dp2** as **URI Prefix** for the Virtual Target **VT-Medrec-2**.
 - ii. Click on **WebLogic Domain ->Environment ->Domain Partition**.
 - iii. Click on Domain Partition **dp2** then Select **Domain Partition -> Administration -> Resource Groups**.
 - iv. Click on Resource group **app2RG**.

- v. In the “Services” and “Deployments” tab, you can verify the creation of above System Resources here.

Accessing Medrec Application in Domain Partition dp2

While accessing the application we need to use the Virtual Target URL. As domain partition dp2 is targeted to Virtual Target VT-Medrec-2, which has /dp2 as URI, we need to add it in URL for the accessing the application.

- a. In Firefox, type the URL: <http://localhost:7101/dp2/medrec/>

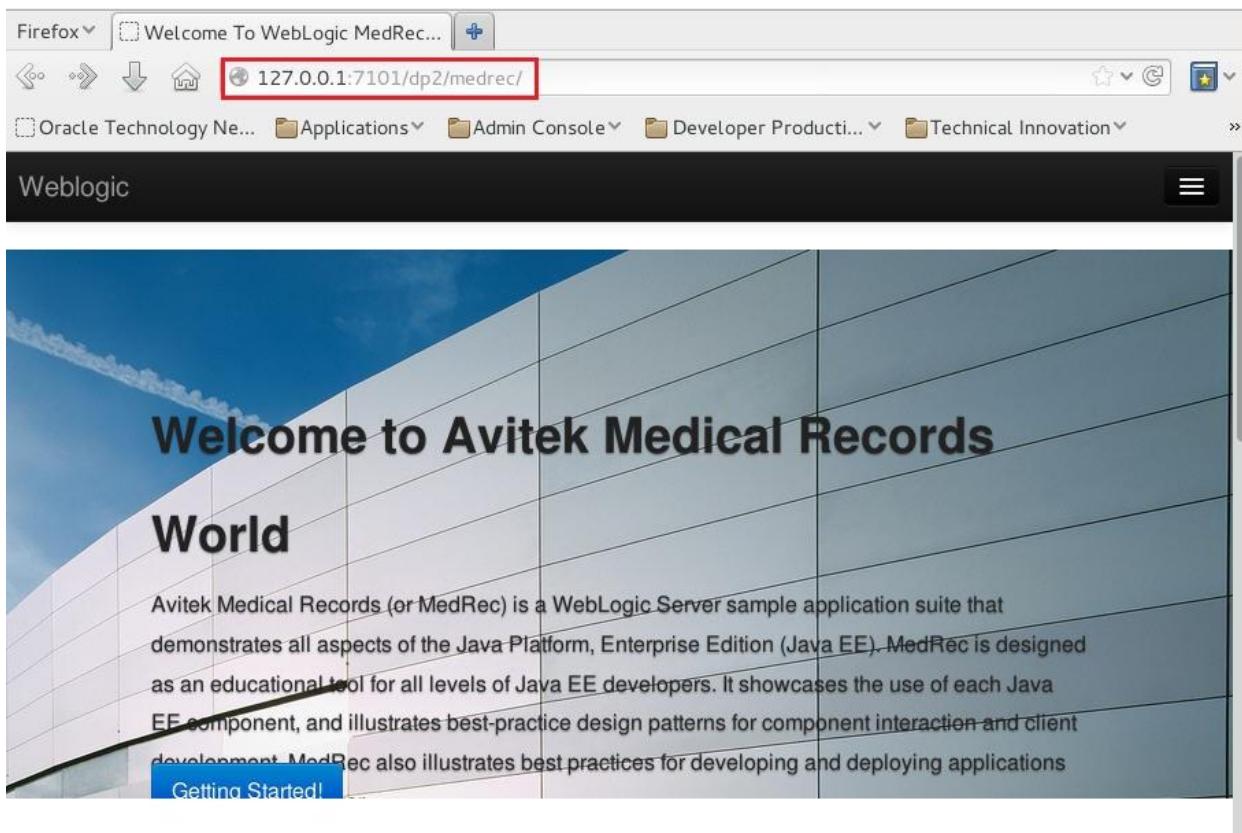

- b. As both this application has exactly same JNDI name used within application, JNDI name of Datasource, JMS connection factory, mail sessions, Distributed Queue.
c. Click on Getting Started!
d. Under **Patient**, Click on Login, Try to login with weblogic@oracle.com/welcome1. You will not be able to login. As both Medrec application is connected to different database. So in Multitenant WebLogic Server, you can deploy exactly same application with same configuration but with different database and there will be no JNDI conflict in domain.

Configuration of Day Trader application in domain partition 3

Here we will create the below configuration through WLST to Run Day Trader Application on Domain Partition dp3.

Virtual Target: VT-daytrader

Domain Partition: dp3

Resource Group app3RG

app1RG:

Datasource:

Name:	jdbc/datasources/TradeDataSource,
JNDI Name:	jdbc/datasources/TradeDataSource
Name:	jdbc/datasources/NoTxTradeDataSource
JNDI Name:	jdbc/datasources/NoTxTradeDataSource

Persistence Store: MyFileStore

JMS Server: MyJMSServer

JMS Module: MyJMSModule

MyJMSModule:

Subdeployment: MySubdeployment

Connection Factory:

Name:	jms/myQueueConnectionFactory,
JNDI Name:	jms/myQueueConnectionFactory
Name:	jms/myTopicConnectionFactory
JNDI Name:	jms/myTopicConnectionFactory

Distributed Queue:

Name:	jms/TradeBrokerQueue
JNDI Name:	jms/TradeBrokerQueue

Distributed Topic:

Name:	jms/TradeStreamerTopic
JNDI Name:	jms/TradeStreamerTopic

Applications: web-3.0.0.war

This DayTraderInDP3.sh creates the Virtual Target, Domain Partition, Resource Group, JDBC Datasource, JMS Server, JMS Module, Distributed Queue and Connection Factory then deploys the web-3.0.0.war.

- a. cd/ **u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2**
- b. **./DayTrader3DB.sh** (It creates the required user for pdborcl database.)
- c. **./DayTraderInDP3.sh**
- d. Go back to Fusion Middleware Control <http://localhost:7001/em>
- e. Verify the creation of the following resources.
 - i. Click on **WebLogic Domain ->Environment ->Virtual Target**. Here we have **dp3** as **URI Prefix** for the Virtual Target **VT-daytrader**.
 - ii. Click on **WebLogic Domain ->Environment ->Domain Partition**.
 - iii. Click on Domain Partition to **dp3** then Select **Domain Partition -> Administration -> Resource Groups**.
 - iv. Click on Resource group **app3RG**.
 - v. In **Services** and **Deployments** tab, you can verify the creation of above System Resources here.

Access Day Trader Application in Domain Partition dp3

- a. Go to Firefox and type the URL: <http://localhost:7101/dp3/daytrader/>
- b. We will not test here the application behavior. The application is loaded and is running inside partition.

You can create many domain partitions in WebLogic 12.2.1. Your application does not require any specific application development. Your application which is working in previous version of WebLogic 12c, you can deploy them in multitenant environment without modifying the application. Daytrader application is developed by IBM which we deployed in domain partition dp3. So you can also easily deployed application build on different platform to WebLogic Server.

LAB 3: SECURITY ISOLATION

Overview

A security realm comprises mechanism for protecting WebLogic resources. Each security realm consists of a set of configured security providers, users, groups, security roles, and security policies. You use realms to configure authentication, authorization, role mapping, credential mapping, auditing and other services.

WebLogic Server traditionally supports multiple realms in a domain configuration, but only one realm—typically referred to as the “default realm” or “admin realm”—can be active at any given time.

In contrast, WebLogic Server MT supports multiple active realms and allows each partition to execute against a different realm.

This means that a partition can have unique security providers, users, groups, security roles and security policies. Resources and applications in the domain partition are available to only to users within the domain partition’s security realm. Other tenants cannot see or access the resources or applications.

Note: Partition can share a security realm, with consequent loss of independence isolation. In particular if you do not specify a realm when you create a partition, the default realm is shared with the partition and there is no security isolation between the partition and the domain.


In this Lab, first we will create a new security realm then we will assign the security realms to a partition dp1. So we will have two security realms in our domain one which we created and one is default security realm. Domain partition dp1 will have new security realm and other domain partitions will have default security realm. Default security realm has a user administrator with password administrator123. And new security realm will have user administrator with password welcome1. So Medrec application deployed in dp1 can be used by users of new security realm. You will not be able to login as an Admin in Medrec Application with default security realm user (administrator/administrator123).

In this lab we are going to perform the following operations:

- Creation of New Security Realm.
- Assigning a new Security realm to Domain Partition.
- Medrec application deployed in two different domain partitions which are using two different security realms in single domain.

Creating a New Security Realm

- i. The creation of Security Realm is more automated still inside WebLogic Console versus Fusion Middleware Control. This is why we will use WebLogic Console for that action. Go to Firefox and type the WebLogic Admin Console URL: <http://localhost:7001/console>.
- ii. Enter **weblogic/welcome1** as username/password then click on Login.

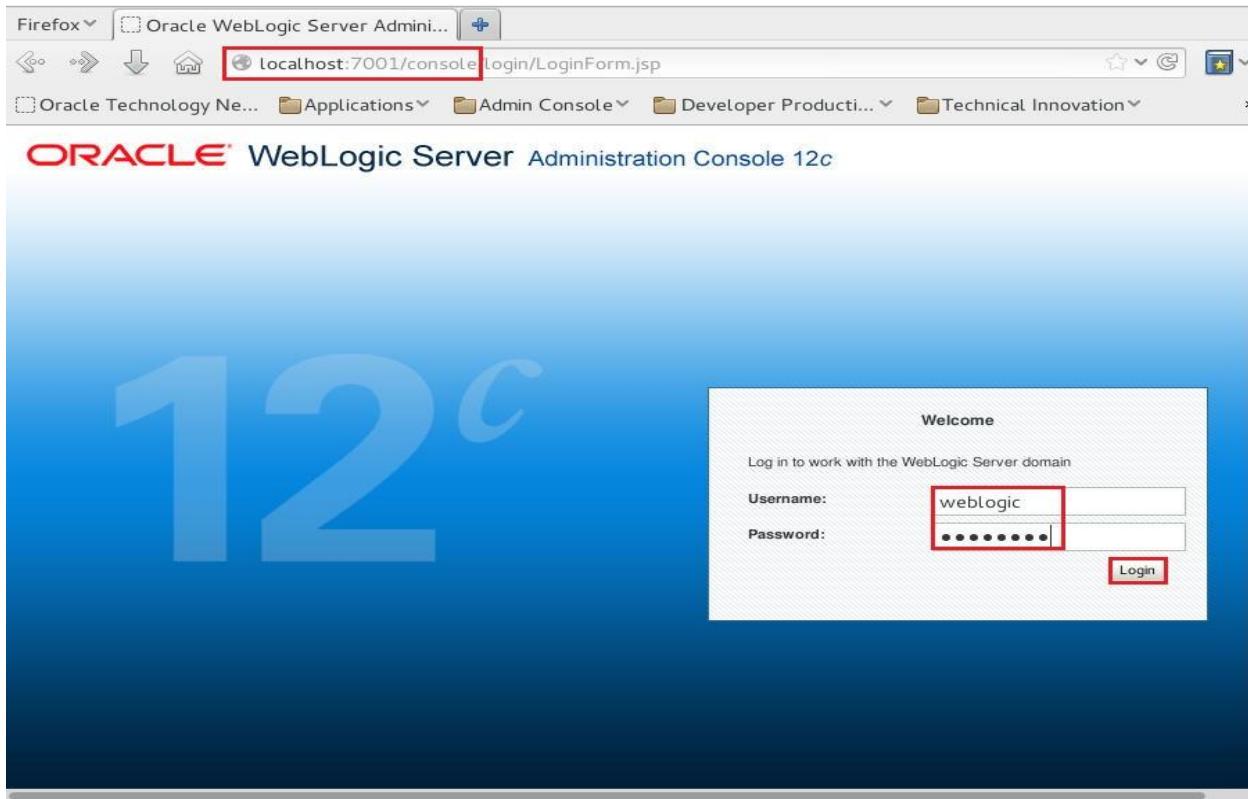

- iii. Under Domain Structure, click on **Security Realms**.

A screenshot of the Oracle WebLogic Server Administration Console 12c home page. The left sidebar shows a 'Domain Structure' tree with nodes like 'base_domain', 'Services', and 'Security Realms' (which is highlighted with a red box). The main content area has sections for 'Information and Resources' (with links to 'Configure applications', 'GridLink', etc.) and 'General Information' (with links to 'Common Administration Task Descriptions', 'Documentation', etc.). The top navigation bar includes 'Home', 'Log Out', 'Preferences', and a search bar. The top right shows the user 'Welcome, weblogic' and the domain 'Connected to: base_domain'.

- iv. Click on **New**.
- v. Enter **mynewrealm** as Name; check the box for “**Create default providers within new realm**” and “**Ignore Deploy Credential Mapping**” then click on **OK**.

Create a New Realm

Realm Properties

The following properties will be used to identify your new realm.

* Indicates required fields

What would you like to name your new realm?

* Name:

Valid security realms must include a number of providers, each of which is responsible for some aspect of the overall security framework. You can use either the WebLogic Server supplied providers or your own custom providers.

Create default providers within this new realm

To avoid overwriting new credential mapping information with old information in a weblogic-ra.xml deployment descriptor file, check the Ignore Deploy Credential Mapping setting below.

Ignore Deploy Credential Mapping

- vi. Click on **mynewrealm**.
- vii. Click on **Users and Groups -> Users** tab.

Settings for mynewrealm

Configuration **Users and Groups** Credential Mappings Providers Migration

Users Groups

This page displays information about each user that has been configured in this security realm.

Customize this table

Users (Filtered - More Columns Exist)

<input type="checkbox"/>	Name	Description	Provider
There are no items to display			

New Delete Showing 0 to 0 of 0 Previous | Next

- viii. Click on New.
 - ix. Enter the following then click on **OK**.
- | | |
|-------------------|--------------------------|
| Name: | administrator |
| Description: | Domain Partition 1 users |
| Provider: | Default Authenticator |
| Password: | welcome1 |
| Confirm Password: | welcome1 |

Create a New User

OK **Cancel**

User Properties

The following properties will be used to identify your new User.

* Indicates required fields

What would you like to name your new User?

* Name:

How would you like to describe the new User?

Description:

Please choose a provider for the user.

Provider:

The password is associated with the login name for the new User.

* Password:

* Confirm Password:

Assign the mynewrealm security realm to domain partition dp1.

- i. Click on **Domain Partitions**, then on **Control** tab.
- ii. Check the box near dp1 and click on **Shutdown ->Force Shutdown Now**.

The screenshot shows the Oracle WebLogic Server Administration Console interface. On the left, there's a navigation tree under 'Domain Structure' with 'Domain Partitions' highlighted. The main area is titled 'Summary of Domain Partitions' with tabs for 'Configuration' and 'Control'. The 'Control' tab is active. Below it, a table lists three domain partitions: dp1, dp2, and dp3. For dp1, the 'Shutdown' dropdown is open, showing 'When work completes' and 'Force Shutdown Now' options. The 'Force Shutdown Now' option is highlighted with a red box.

Name	Default Target	Status of Last Action
<input checked="" type="checkbox"/> dp1	VT-Medrec-1	RUNNING
<input type="checkbox"/> dp2	VT-Medrec-2	RUNNING
<input type="checkbox"/> dp3	VT-daytrader	RUNNING

- iii. Once domain partition shutdown, click on dp1.
- iv. In **Configuration-> General** tab, Under Use Realm, select **mynewrealm** then click on **Save**.

The screenshot shows the 'Settings for dp1' configuration page. At the top, there are two tabs: 'Configuration' (highlighted with a red box) and 'Resource Groups', followed by other tabs like 'Deployments', 'Services', etc. Below that, there are sub-tabs: 'General' (highlighted with a red box), 'Available Targets', 'File Systems', 'JTA', 'Concurrency', and 'Partition Work Manager'. There's also a 'Resource Management' button. A 'Save' button is located at the bottom left. The main content area is titled 'Select Default Targets:' and shows two sections: 'Available' (empty) and 'Chosen' (containing 'VT-Medrec-1'). A note on the right says 'Select de These ta that does'. At the bottom, there's a 'Use Realm:' dropdown set to 'mynewrealm' (highlighted with a red box), and a 'Primary Identity Domain:' input field containing 'idd_dp1'.

- v. Click on **Domain Partitions**, then on **Control** tab.
- vi. Select the box near dp1 and click on **Start**.

The screenshot shows the Oracle WebLogic Server Administration Console interface. On the left, there's a navigation tree under 'Domain Structure' for 'base_domain' with 'Domain Partitions' selected. A red box highlights this selection. The main content area is titled 'Summary of Domain Partitions' and shows a table of domain partitions. The table has columns: Name, Default Target(s), State, and Status of Last Action. It lists three partitions: dp1 (selected), dp2, and dp3. The 'dp1' row has a checked checkbox in the first column. Below the table are buttons for Start, Resume, Suspend, and Shutdown. The status bar at the bottom indicates 'Showing 1 to 3 of 3 Previous | Next'.

	Name	Default Target(s)	State	Status of Last Action
<input checked="" type="checkbox"/>	dp1	VT-Medrec-1	SHUTDOWN	TASK COMPLETED
<input type="checkbox"/>	dp2	VT-Medrec-2	RUNNING	TASK COMPLETED
<input type="checkbox"/>	dp3	VT-daytrader	RUNNING	TASK COMPLETED

Verified that we have two security realms in different domain partition in single domain

- i. Go to Firefox and type the URL: <http://localhost:7101/dp1/medrec/index.xhtml>
- ii. Under Administrator, click on Login.
- iii. Login with old security realm credential that is administrator/administrator123.
- iv. You must get “Incorrect username or password!”
- v. Login with new security realm credential that is administrator/welcome1.
- vi. Click on Logout. Click on Logout again.
- vii. Go to Firefox and type the URL: <http://localhost:7101/dp2/medrec/index.xhtml>
- viii. Under Administrator, click on Login.
- ix. Login with new security realm credential that is administrator/welcome1.
- x. You must get “Incorrect username or password!”
- xi. Login with old security realm credential that is administrator/administrato123.
- xii. Click on Logout. Click on Logout again.

Here we learned how you can have two security realms in a domain. So one of your domain partitions can use default security realm and other can use custom security realm created by you in same domain.

LAB 4: EXPORT/IMPORT DOMAIN PARTITION

Overview

Exporting and importing partitions let WLS system administrators easily move partitions from one domain to another, including the applications that are deployed to the partition. This feature is useful for replicating partitions across the domains and for moving domains from a development to a testing then production environment.

Exporting a domain partition creates a partition backup and stores it in an archived format. You can export a domain partition from source domain with its entire configuration and data. With few configuration changes, you can then import the partition archive into another instance of multi-tenant WLS (the target domain). You might need to update any domain dependencies, such as targets and security realms, and optionally update other attributes in the partition configuration to make it valid.

When a partition is exported from the source domain it is packaged in a partition archive. Included in the partition archive is:

- The partition configuration.
- Any resource group contained in the partitions.
- Any resource group templates referred to by those resource groups.
- The contents of the file system, <partition-file-system>/config directory.
- Optionally, application binaries and configuration for applications deployed to the partition.

No application runtime state or application-specific runtime configuration is included in the partition archive. Examples of what would not be exported are JMS messages in queues, users in an embedded LDAP realm.

In this Lab, We will create a Non-JRF domain dev_domain and configure it with all required resources for Medrec application. You will remove domain partition dp1 from base_domain. As this domain partition is targeted to Virtual Target VT-Medrec-1 and we are going to import a new domain partition on this Virtual target. So we need to remove this domain partition dp1 for this Lab2.

We are going to learn the following:

- Exporting a domain partition from a Non-JRF domain dev_domain and importing it to a Restricted JRF domain base_domain.

Note: To simplify import/export both domains contain Virtual Target with the same name. In our case, base_domain and dev_domain has VT-Medrec-1 as Virtual Target. It is possible to make import/export without that restriction. To import partition and bind it to virtual target of different name, you should modify settings inside associated “*-attributes.JSON” file

Please remember that Virtual Target may be assigned to the one and only one domain partition. This is why before importing please ensure that original domain partition “dp1” was completely removed from domain configuration (don’t miss step c on page 47!)

Stop and remove domain partition dp1 from base_domain.

- a. In Fusion Middleware Control <http://localhost:7001/em> , Click on **WebLogic Domain -> Environment -> Domain Partition**.
- b. Check the **box** near **dp1** then click on **Control -> Stop->Force Stop Now**. On the Confirmation Screen Click on **OK**. Once you see the message “**Partition state after the operation is SHUTDOWN**” then click on **Close**.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface for managing domain partitions. At the top, it says "ORACLE Enterprise Manager Fusion Middleware Control 12c" and "WebLogic Domain weblogic". The date and time are Nov 5, 2015 6:11:54 PM PST. The main area shows two pie charts: "Status" (Up: 3) and "State" (Running: 3). Below them is a table of domain partitions:

Name	Status	OTD Partition	Realm	Default Targets	Available Targets
dp1	Up	Stop	When work completes	vt-medrec-1	vt-medrec-1
dp2	Up	Running	vtrealm	vt-medrec-2	vt-medrec-2
dp3	Up	Running		vt-daytrader	vt-daytrader

A red box highlights the "Control" dropdown menu for the dp1 row. Another red box highlights the "Force stop now" option in the dropdown menu. The status bar at the bottom right says "Domain Partitions 3 of 3".

- c. Check the box near **dp1** and make it highlighted then click on **Delete**. In Delete Domain Partition Screen, click on OK.

Name	Status	State	OTD Partition	Realm	Default Targets	Available Targets
dp1		Shutdown		mynewrealm	VT-Medrec-1	VT-Medrec-1
dp2		Running			VT-Medrec-2	VT-Medrec-2

- d. Go to Firefox and type the URL: <http://localhost:7101/dp1/medrec/>
e. Confirm that page return “Error 404—Not Found”.

Error 404--Not Found

From RFC 2068 Hypertext Transfer Protocol -- HTTP/1.1:

10.4.5 404 Not Found


The server has not found anything matching the Request-URI. No indication is given of whether the condition is temporary or permanent.

If the server does not wish to make this information available to the client, the status code 403 (Forbidden) can be used instead. The 410 (Gone) status code SHOULD be used if the server knows, through some internally configurable mechanism, that an old resource is permanently unavailable and has no forwarding address.

Create a new dev single server (Admin Server) domain


We are going to create a domain which contains only Admin Server, as the previous domain base_domain is created with RESTRICTED-JRF template. But this domain will be created by default template that is with basic template.

- a. Open a new tab.
- b. cd /u01/wins/wls1221/oracle_common/common/bin/
- c. ./config.sh
- d. Select “Create a new domain” and Enter “/u01/wins/wls1221/user_projects/domains/dev_domain” as Domain Location then click on **Next**.

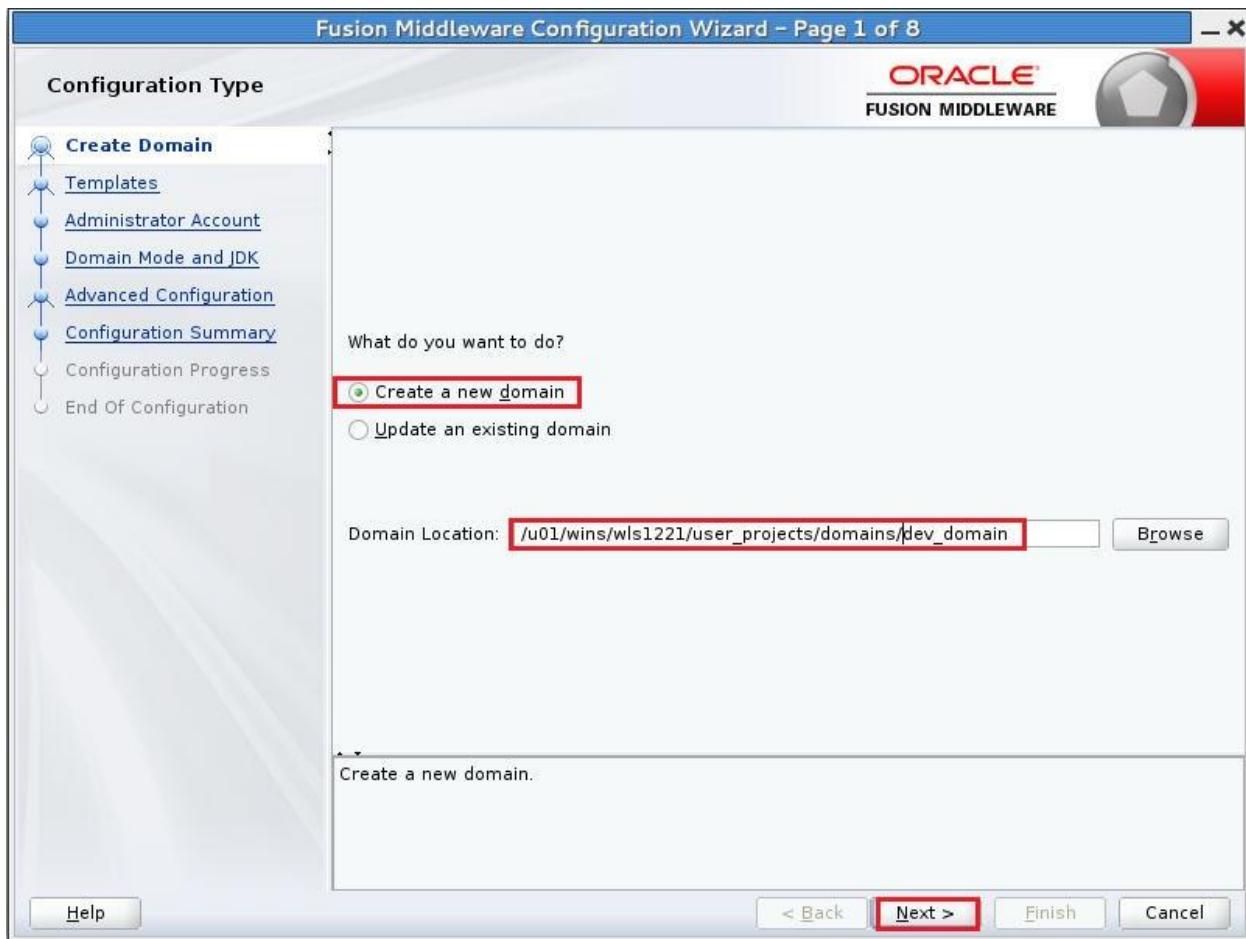

- e. Leave **Default** on Templates then click on **Next**.
- f. Enter **weblogic/welcome1** as Name/Password in Administrator Account then click on **Next**.
- g. Leave default on Domain Mode and JDK then click on **Next**.
- h. Check the box near to Administration Server then click on **Next**.

- i. In Administration Server, Enter 9001 as Listen Port then click on **Next**.

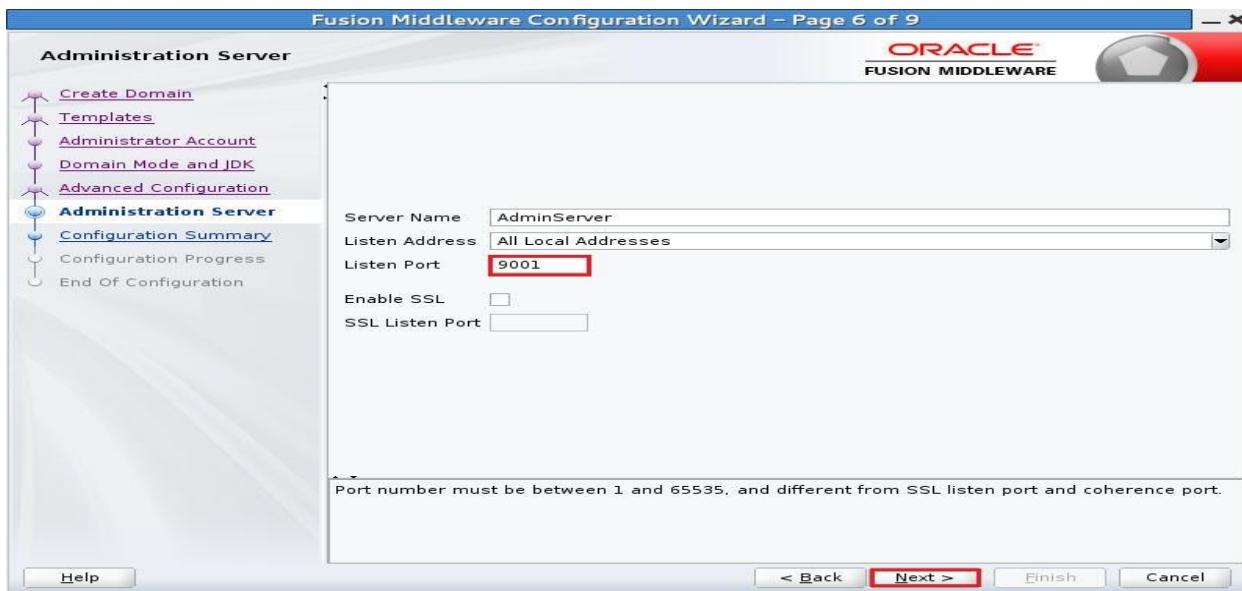

- j. Click on **Create** then click on Next. Click on **Finish**.

Configure domain for Medrec Application.

In Lab 2, you configure the domain using Fusion Middleware console, but here we are going to configure domain using Weblogic Admin Console. The operation related to Multitenancy, we can also perform using WebLogic Admin Console.

- cd /u01/wls/wls1221/user_projects/domains/dev_domain/
- ./startWebLogic.sh
- In Tab, Click on Terminal -> Set Title, Enter **dev_admin** as Title then Click on OK.
- Go to Firefox and type the WebLogic Admin Console URL:
<http://localhost:9001/console>.
- Enter **weblogic/welcome1** as Username/Password then click on Login.
- Creation of Virtual Target.
 - Click on **Environment -> Virtual Targets**.



- ii. Click on New.
- iii. Enter the following then click on **OK**.
- | | |
|-------------|---|
| Name: | VT-Medrec-1 (Both Virtual Target Name will be same) |
| Target: | Admin Server |
| URI Prefix: | /devDP |

Home >Summary of Virtual Targets

Create a New Virtual Target

OK | **Cancel**

Virtual Target Properties

The following properties will be used to identify your new virtual target.

What would you like to name your new virtual target?

Name: **VT-Medrec-1**

Select one managed server or cluster on which you would like to deploy this virtual target

Target: **AdminServer**

Enter one or more hostnames, each on separate lines within the text box.

Host Names:

Enter an URI prefix starting with a / (forward slash).

URI Prefix: **/devDP**

- g. Creation of Domain Partition.
- i. Click on **Domain Partition -> New**.

ORACLE WebLogic Server Administration Console 12c

Change Center

View changes and restarts

Configuration editing is enabled. Future changes will automatically be activated as you modify, add or delete items in this domain.

Domain Structure

- dev_domain
 - + **Domain Partitions**
 - Environment
 - Servers
 - Clusters
 - Coherence Clusters
 - Resource Groups
 - Resource Group Templates
 - Machines
 - Virtual Hosts
 - Virtual Targets
 - Work Managers
 - Concurrent Templates
 - Resource Management

How do I...

- Create Domain Partitions
- Configure Domain Partition General Settings
- Export partitions
- Import partitions

System Status

Health of Running Servers

Home >Summary of Virtual Targets >Summary of Domain Partitions

Welcome, weblogic | Connected to: dev_domain

Summary of Domain Partitions

Configuration | **Control**

Domain partitions are an administrative and runtime slice of a WebLogic domain that is dedicated to running application instances and related resources for a tenant.

This page summarizes the domain partitions that have been configured in the current WebLogic Server domain.

Customize this table

Domain Partitions (Filtered - More Columns Exist)

New	Delete	Import	Export	Showing 0 to 0 of 0 Previous Next			
	Name	Resource Groups		Default Target(s)	State		
There are no items to display							

New | **Delete** | **Import** | **Export** | Showing 0 to 0 of 0 Previous | Next

- ii. Enter **Medrec-Dev** as Name and **unchecked** the box for **Default Resource Group**. Click on **Next**.
- iii. Check the box for **VT-Medrec-1** then click on **Next**.
- iv. In Default Targets, Move **VT-Medrec-1** to Chosen. Click on **Finish**.

Create a New Domain Partition

Domain Partition Configuration

The following properties will be used to configure your new domain partition.

Default Targets:

Available:	Chosen:
[Empty]	<input checked="" type="checkbox"/> VT-Medrec-1

Security: Not assigned
Realm:

Partition File System

- v. In **Domain Partition -> Control tab**, check the box near Medrec-Dev and click on Start.

Summary of Domain Partitions

Control

This page lists the state of the domain partitions in this WebLogic Server domain.

Domain Partitions

<input checked="" type="checkbox"/>	Name	Default Target(s)	State	Status of Last Action
<input checked="" type="checkbox"/>	Medrec-Dev	VT-Medrec-1	SHUTDOWN	None

Start **Resume** **Suspend** **Shutdown** Showing 1 to 1 of 1 Previous | Next

Start **Resume** **Suspend** **Shutdown** Showing 1 to 1 of 1 Previous | Next

- h. Creation of Resource Group
- Click on domain partition **Medrec-Dev**.
 - Click on **Resource Groups -> Configuration tab** then click on New.

This page summarizes the resource groups of a domain partition that have been configured in the current WebLogic Server domain.

Resource Groups

Name	Resource Group Template	Effective Targets	State	Notes
There are no items to display				

- Enter **appRG** as Name, Leave others as default then click on **OK**.

Note: We have created script through which you can create the remaining resources, you need to run the file **MedrecInMedrec-Dev.sh** inside **/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4**, and then you can directly go to **Exporting the domain partition** section.

- Creation of Data Source.
 - Click on **dev_domain -> Services -> Data Sources** then click on **New-> Generic Data Sources**.

A JDBC data source is an object bound to the JNDI tree that provides database connectivity through a pool of JDBC connections. Applications can look up a data source on the JNDI tree and then borrow a database connection from a data source.

Data Sources (Filtered - More Columns Exist)

New	Type	JNDI Name	Targets	Scope	Domain Partitions
There are no items to display					

- ii. Enter the following and click on **Next**.

Name: MedRecGlobalDataSourceXA
JNDI Name: jdbc/MedRecGlobalDataSourceXA
Scope: appRG in Medrec-Dev
Database Type: Oracle

Create a New JDBC Data Source

Back **Next** | Finish | Cancel

JDBC Data Source Properties

The following properties will be used to identify your new JDBC data source.
* Indicates required fields

What would you like to name your new JDBC data source?

* Name: **MedRecGlobalDataSourceXA**

What scope do you want to create your data source in ?

Scope: **appRG in Medrec-Dev**

What JNDI name would you like to assign to your new JDBC Data Source?

JNDI Name: **jdbc/MedRecGlobalDataSourceXA**

What database type would you like to select?

Database Type: **Oracle**

- iii. Select “**Oracle’s Driver (Thin XA) for Service connections; Version: Any**” then click on **Next**.

- iv. In Transaction Options, click on **Next**.

v. Enter the following and click on **Next**.

Database Name: pdborcl
Host Name: localhost
Port: 1521
Database User Name: medrec1
Password: medrec1

Create a New JDBC Data Source

Back **Next** Finish Cancel

Connection Properties

Define Connection Properties.

What is the name of the database you would like to connect to?

Database Name: **pdborcl**

What is the name or IP address of the database server?

Host Name: **localhost**

What is the port on the database server used to connect to the database?

Port: **1521**

What database account user name do you want to use to create database connections?

Database User Name: **medrec1**

What is the database account password to use to create database connections?

Password: *********

Confirm Password: *******|**

- vi. Click on **Test Configuration** and verify the connectivity.
vii. Click on **Next** then Click on **Finish**.

j. Creation of JMS Server.

- i. Click on **Services -> Messaging -> JMS Servers**.
- ii. Click on **New**.

ORACLE WebLogic Server Administration Console 12c

Change Center

View changes and restarts

Configuration editing is enabled. Future changes will automatically be activated as you modify, add or delete items in this domain.

Domain Structure

- dev_domain
 - + Domain Partitions
 - + Environment
 - Deployments
 - Services
 - Message
 - JMS Servers
 - Store-and-Forward Agents
 - JMS Modules
 - Path Services
 - + Bridges
 - Data Sources
 - Persistent Stores
 - Foreign JNDI Providers

How do I...

- Configure JMS servers
- Configure JMS system modules

Welcome, weblogic | Connected to: dev_domain

Home >Summary of Virtual Targets >Summary of Domain Partitions >Medrec-Dev >Summary of JDBC Data Sources >Summary of JMS Servers

Summary of JMS Servers

JMS servers act as management containers for the queues and topics in JMS modules that are targeted to them. This page summarizes the JMS servers that have been created in the current WebLogic Server domain.

Customize this table

JMS Servers (Filtered - More Columns Exist)

<input type="checkbox"/>	Name	Persistent Store	Target	Current Target	Health	Scope	Domain Partitions
There are no items to display							

New Delete Showing 0 to 0 of 0 Previous | Next

<input type="checkbox"/>	Name	Persistent Store	Target	Current Target	Health	Scope	Domain Partitions
Showing 0 to 0 of 0 Previous Next							

New Delete Showing 0 to 0 of 0 Previous | Next

iii. Enter the following and click on **Next**.

Name: DevJMSServer
Scope: appRG in Medrec-Dev

Create a New JMS Server

Back | **Next** | Finish | Cancel

JMS Server Properties

The following properties will be used to identify your new JMS Server.

* Indicates required fields

What would you like to name your new JMS Server?

 * Name: **DevJMSServer**

Would you like this new JMS Bridge Destination to be restricted to a specific resource group template or resource group ?

Scope: **appRG in Medrec-Dev**

Back | **Next** | Finish | Cancel

iv. Click on **Create a New Store**.

v. Select “File Store” as Type then click on **Next**.

vi. Enter “MedrecDev-fs” as Name and “appRG in Medrec-Dev” as Scope then click on **Next**. Click on **Finish**.

Create a New JMS Server

Back | **Next** | Finish | Cancel

File Store Properties

The following properties will be used to identify your new file store.

* Indicates required fields

What would you like to name your new file store?

* Name: **MedrecDev-fs**

What scope do you want to create your jms file store in ?

Scope: **appRG in Medrec-Dev**

The pathname to the directory on the file system where the file store is kept. This directory must exist on your system, so be sure to create it before completing this tab.

Directory:

Back | **Next** | Finish | Cancel

vii. Select “**MedrecDev-fs**” as Persistent Store then click on **Next**.



viii. Click on **Finish**.


k. Creation of JMS Module.

i. Click on **Services -> Messaging -> JMS Modules** then click on New.

The screenshot shows the Oracle WebLogic Server Administration Console. The left sidebar has a tree view of domain structure, with 'JMS Modules' selected and highlighted with a red box. The main content area is titled 'Summary of JMS Modules' and contains a table with columns: Name, Type, Scope, and Domain Partitions. The table is currently empty, displaying the message 'Showing 0 to 0 of 0'. There is also a 'Customize this table' link above the table.

ii. Enter **DevJMSModule** as Name and “**appRG in Medrec-Dev**” then click on **Next**.

- iii. Check the box for “Would you like to add resources to this JMS system module” then click on **Finish**.

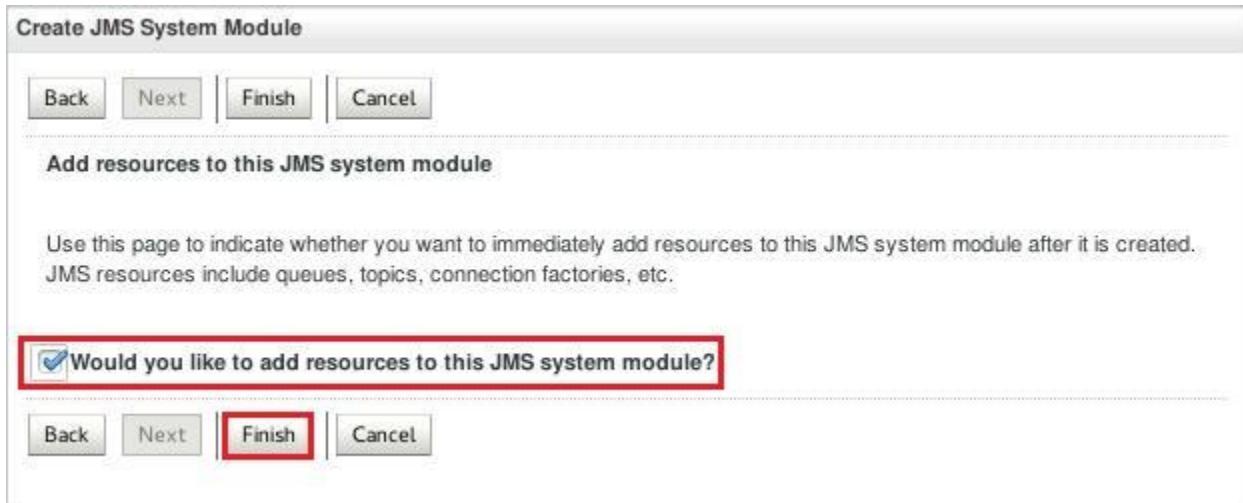

- I. Creation of Subdeployment.
i. Select **Subdeployments** tab then click on New.

	Name	Resources	Targets
There are no items to display			

- ii. Enter **DevMedrecJMS** as Name then click on **Next**.
iii. Select **DevJMSServer** as Target then click on **Finish**.

- m. Creation of Connection Factory.
- i. Click on Configuration tab then click on New.

Settings for DevJMSModule

Configuration	Subdeployments	Security	Notes																								
This page displays general information about a JMS system module and its resources. It also allows you to configure new resources and access existing resources.																											
Name:	DevJMSModule																										
			The name of this JMS system module. More Info...																								
Scope:	appRG in Medrec-Dev																										
			Specifies if the JMS system module is accessible within the domain, a partition, or a resource group template. More Info...																								
Descriptor File Name:	partitions/Medrec-Dev/jms/devjmsmodule-jms.xml																										
			The name of the JMS module descriptor file. More Info...																								
This page summarizes the JMS resources that have been created for this JMS system module, including queue and topic destinations, connection factories, JMS templates, destination sort keys, destination quota, distributed destinations, foreign servers, and store-and-forward parameters.																											
<p>▶ Customize this table</p> <p>Summary of Resources</p> <table border="1"> <thead> <tr> <th>New</th> <th>Delete</th> <th colspan="4">Showing 0 to 0 of 0 Previous Next</th> </tr> <tr> <th><input type="checkbox"/></th> <th>Name </th> <th>Type</th> <th>JNDI Name</th> <th>Subdeployment</th> <th>Targets</th> </tr> </thead> <tbody> <tr> <td colspan="6">There are no items to display</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>New</th> <th>Delete</th> <th colspan="4">Showing 0 to 0 of 0 Previous Next</th> </tr> </thead> </table>				New	Delete	Showing 0 to 0 of 0 Previous Next				<input type="checkbox"/>	Name	Type	JNDI Name	Subdeployment	Targets	There are no items to display						New	Delete	Showing 0 to 0 of 0 Previous Next			
New	Delete	Showing 0 to 0 of 0 Previous Next																									
<input type="checkbox"/>	Name	Type	JNDI Name	Subdeployment	Targets																						
There are no items to display																											
New	Delete	Showing 0 to 0 of 0 Previous Next																									

- ii. Select the box for Connection Factory then click on **Next**.
- iii. Enter **DevMedRecConnectionFactory** as Name and **com.oracle.medrec.jms.connectionFactory** and leave other default then click on **Next**.
- iv. Click on **Finish**.
- n. Creation of Distributed Queue.
 - i. Click on New.
 - ii. Select the box for Distributed Queue then click on **Next**.
 - iii. Enter **PatientNotificationQueue** as Name and **com.oracle.medrec.jms.PatientNotificationQueue** as JNDI Name and leave other default then click on **Next**.

- iv. Click on **Advanced Targeting**, Select DevMedrecJMS as Subdeployments and DevJMSServer as Targets then click on **Finish**.

Create a New JMS System Module Resource

Back | Next | **Finish** | Cancel

The following properties will be used to target your new JMS system module resource

Use this page to select a subdeployment to assign this system module resource. A subdeployment is a mechanism by which JMS resources are grouped and targeted to a server instance, cluster, or SAF agent. If necessary, you can create a new subdeployment by clicking the **Create a New Subdeployment** button. You can also reconfigure subdeployment targets later by using the parent module's subdeployment management page.

Select the subdeployment you want to use. If you select (none), no targeting will occur.

Subdeployments: **DevMedrecJMS** | Create a New Subdeployment

What targets do you want to assign to this subdeployment?

Targets: **DevJMSServer**

Back | Next | **Finish** | Cancel

- o. Creation of Mail Session.
i. Click on **Services -> Mail Sessions**.



- ii. Click on **New**.
- iii. Enter the following then click on **Next**.

Name: MedRecMailSession
JNDI Name: mail/MedRecMailSession
Scope: appRG in Medrec-Dev

Create a New Mail Session

Back **Next** | Finish | Cancel

Mail Session Properties

The following property will be used to identify your new mail session.

* Indicates required fields

What would you like to name your new mail session?

* Name:

* JNDI Name:

What scope do you want to create your mail session in ?


Scope:



- iv. Click on **Finish**.

- p. Deployments of Application
 - i. Click on **Deployments** then on **Install**.
 - ii. Select the medrec.ear application from the Path /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4/ then click on **Next**.

- iii. Select “**Install this deployment as an application**” and “**appRG in Medrec-Dev**” as Scope then click on **Next**. Click on **Finish**.

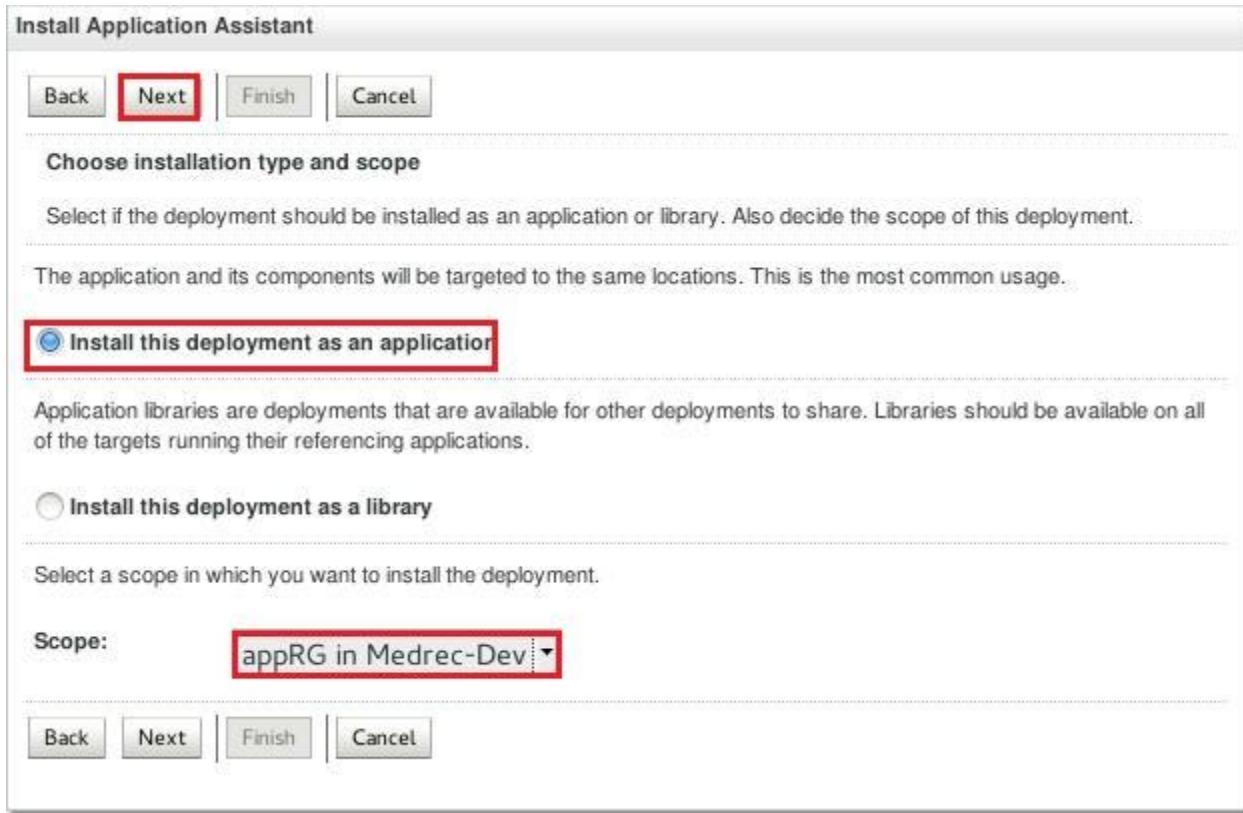

- iv. Click on **Install** then Select the physician.ear application from the Path /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4/ then click on **Next**.
- v. Select “**Install this deployment as an application**” and “**appRG in Medrec-Dev**” as Scope then click on **Next**. Click on **Finish**.
- vi. Click on **Install** then Select the chat.war application from the Path /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4/ then click on **Next**.
- vii. Select “**Install this deployment as an application**” and “**appRG in Medrec-Dev**” as Scope then click on **Next**. Click on **Finish**.
- viii. Go to Firefox and type the URL: <http://localhost:9001/devDP/medrec/> and confirm the execution of application.

Exporting the domain partition

- Go back to admin console <http://localhost:9001/console/> of dev_domain.
- Click on **Domain Partition**, and then check the box near to “**Medrec-Dev**” then click on Export.

Name	Resource Groups	Default Target(s)	State
Medrec-Dev	appRG	VT-Medrec-1	RUNNING

- Select the box for “**Include Application Bits**” and enter **/home/oracle/Desktop** as Path then click on **OK**.

OK | Cancel

Export a Domain Partition

Select or enter the directory where the domain partition archive should be placed. Each domain partition should be located in its own directory. The domain partition archive will be overwritten if it already exists. Other files in the directory may be overwritten as well.

Domain: Medrec-Dev
Partition Name: Medrec-Dev

Do you want to include the installed applications in the exported ZIP file?

Include Application Bits

What is the full path to the key file you want to use to encrypt attributes in the partition archive?

Full path to the Key File:

Where do you want the domain partition archive to be placed ?

Path:

- Go to Desktop and Verify the Creation of **Medrec-Dev-attributes.json** and **Medrec-Dev.zip** file.

Importing the domain partition

- Go back to EM console of base_domain. Go to Firefox and type the WebLogic Admin Console URL: <http://localhost:7001/em>.
- Enter **weblogic/welcome1** as Username/Password and click on Login.
- Click on **WebLogic Domain-> Environment ->Domain Partition**.
- Click on Import. Click on **Browse** button, Select the file **Medrec-Dev.zip** from **/home/oracle/Desktop** directory then click on **OK**.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. The top navigation bar includes 'WebLogic Domain' and 'weblogic'. The main content area is titled 'base_domain' and shows 'Domain Partitions'. A pie chart indicates 2 Up and 2 Running partitions. Below the chart is a table listing two partitions: dp2 and dp3, both in the 'Running' state. The 'Import' button in the toolbar is highlighted with a red box.

Name	Status	State	OTD Partition	Realm	Default Targets	Available Targets
dp2	Up	Running			VT-Medrec-2	VT-Medrec-2
dp3	Up	Running			VT-daytrader	VT-daytrader

Domain Partitions 2 of 2

The screenshot shows the 'Import Domain Partition' dialog box. It instructs the user to import a partition archive from a zip file. The 'Import domain partition from zip file' field contains the path '/home/oracle/Desktop/Medrec-Dev.zip'. The 'Browse...' button next to it is highlighted with a red box. Below the field are two optional settings: 'Overwrite existing resource group templates' (unchecked) and 'Override domain partition name (optional)' with an empty input field. At the bottom are 'OK' and 'Cancel' buttons, with 'OK' also highlighted with a red box.

- e. Initially it will have State “**Unknown**”. Wait for 1 or 2 minute, click on Refresh icon to get the current state.
- f. Once the status for **Medrec-Dev** domain partition is **Shutdown**, check the box, near Medrec-Dev then click on **Control -> Start**. Click on **Close**. Click on the Refresh icon to get the current state.

The screenshot shows the Oracle Enterprise Manager interface for a WebLogic Domain named 'base_domain'. At the top, there are two pie charts: one for 'Status' showing 'Up (3)' and another for 'State' showing 'Running(3)'. Below these are two tabs: 'Status' and 'State'. A table lists domain partitions:

Name	Status	State	OTD Partition	Realm	Default Targets	Available Targets
dp2		Running			VT-Medrec-2	VT-Medrec-2
dp3		Running			VT-daytrader	VT-daytrader
Medrec-Dev		Running			VT-Medrec-1	VT-Medrec-1

- g. Go to Firefox and type the URL: <http://localhost:7101/dp1/medrec/>
- h. Click on “**Getting Started!**” Under Administrator, click on Login.
- i. Enter **administrator/administrator123** as Username/Password then click on Sign in.
- j. Click on Logout. Click on Logout again.

Note: As we have VT-Medrec-1 as Virtual target in both the domains `base_domain` and `dev_domain`. In `base_domain`, we have added `administrator` user to default security realm. So as this domain partition becomes part of this domain. It also uses the default security realm. Here you are accessing the application using `/dp1` in the URL because, we have Virtual target `VT-Medrec-1` has `/dp1` as URI, So Virtual target definition do not change during import.

- k. Come back to tab **dev_admin**.
- l. Stop the Weblogic Server running in `dev_domain`, by pressing `Ctrl +C` in tab in which Admin Server is running. Close the Tab.

LAB 5: RESOURCE CONSUMPTION MANAGEMENT

Overview

When applications that are deployed to multiple collocated Domain Partitions, access shared resources (low level resources such as CPU, network, storage) two key problems are likely to be faced:

- Contention and unfairness during allocation: Multiple request for a Shared resources results in contention and interference. Abnormal resource consumption requests may happen due to benign reasons (high traffic-genuine or DDoS), misbehaving, buggy applications or malicious code. These requests could overload the capacity of shared resources, thereby preventing another consumer's access to the resource.
- Variable performance leading to potential Service Level Agreement (SLA) violations: From a cloud operations perspective, performance for different collocated consumers.

It is therefore critical to manage and isolate access to shared resources in the WebLogic application Server by domain partition to ensure fairness in allocation, prevent contention/interferences of access to shared resources and to provide consistent performance for multiple co resident tenants. The Resource Consumption Management (RCM) feature in WebLogic 12.2.1 Multitenancy allows WebLogic System administrator to specify resource consumption management policies (allows the specification of constraints, recourse actions and notification) on shared resources such as CPU, Heap, File and Network. You can create resource manager based on the following parameter:

- Retained Heap
- CPU Time
- Open File Descriptor

You need to provide the value for below action, as it reaches to that value. It will trigger the following action:

- Notify:** Inform administrator that a threshold has been crossed.
Slow: Reduce Partition ability to consume more resources.
Stop: Initiate the shutdown sequence for the offending partition.


In this lab first we create a resource manager based on the Heap size then we specify the values with respective actions. So as following values reaches that action get triggered. We will use sample application through which we can modify the value of Heap size and we will see the action associated.

In this lab we are going to perform the following operations:

- Enabling RCM by adding extra arguments in Server Java Arguments.
- Creating Resource manager on the basis of Heap Size.
- Assign Resource manager to a Domain Partition.
- Running an example to understand the functioning of RCM.


Enabling RCM by adding extra arguments in Server JAVA_OPTION Arguments

- Go to Firefox and type the Fusion Middleware Control Console URL:
<http://localhost:7001/em>
- Click on **WebLogic Domain -> Control -> Clusters.**

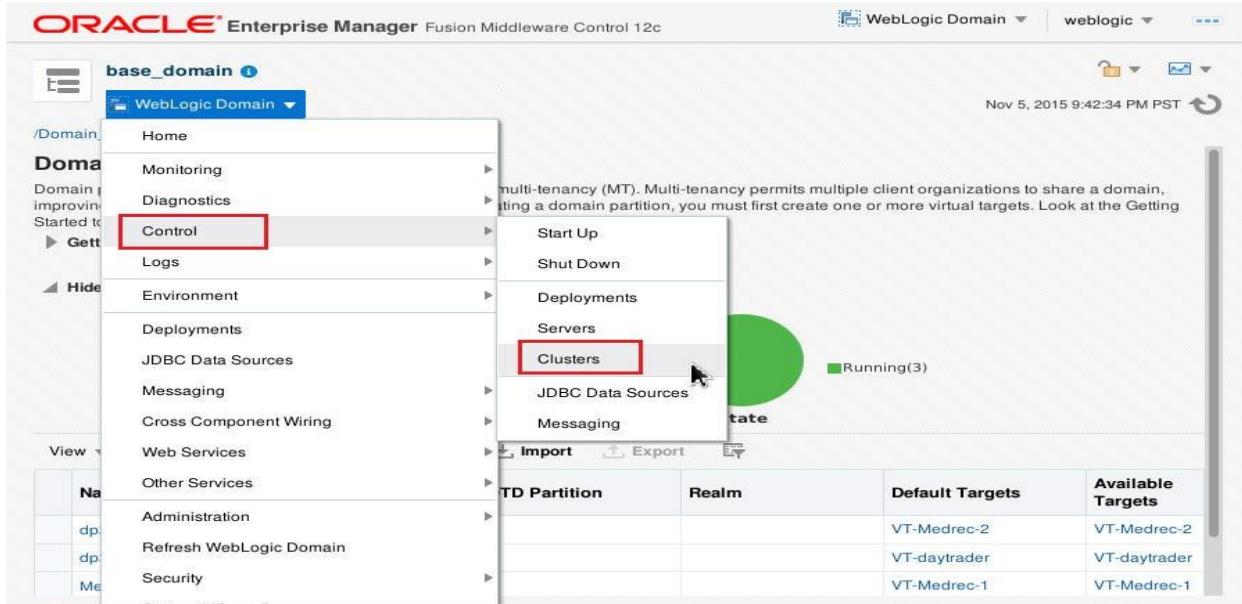

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. The left sidebar shows a tree view with 'Domain' selected. Under 'Domain', 'Control' and 'Clusters' are highlighted with red boxes. The main content area shows a pie chart indicating 'Running(3)' and a table for 'TD Partition'. The table has columns: TD Partition, Realm, Default Targets, and Available Targets. It lists three partitions: VT-Medrec-2, VT-daytrader, and VT-Medrec-1, each with its corresponding targets.

- Check the boxes near app-cluster then click on **Control -> Shutdown ->Force Shutdown Now**. Click on **Forcibly Shutdown Servers**.

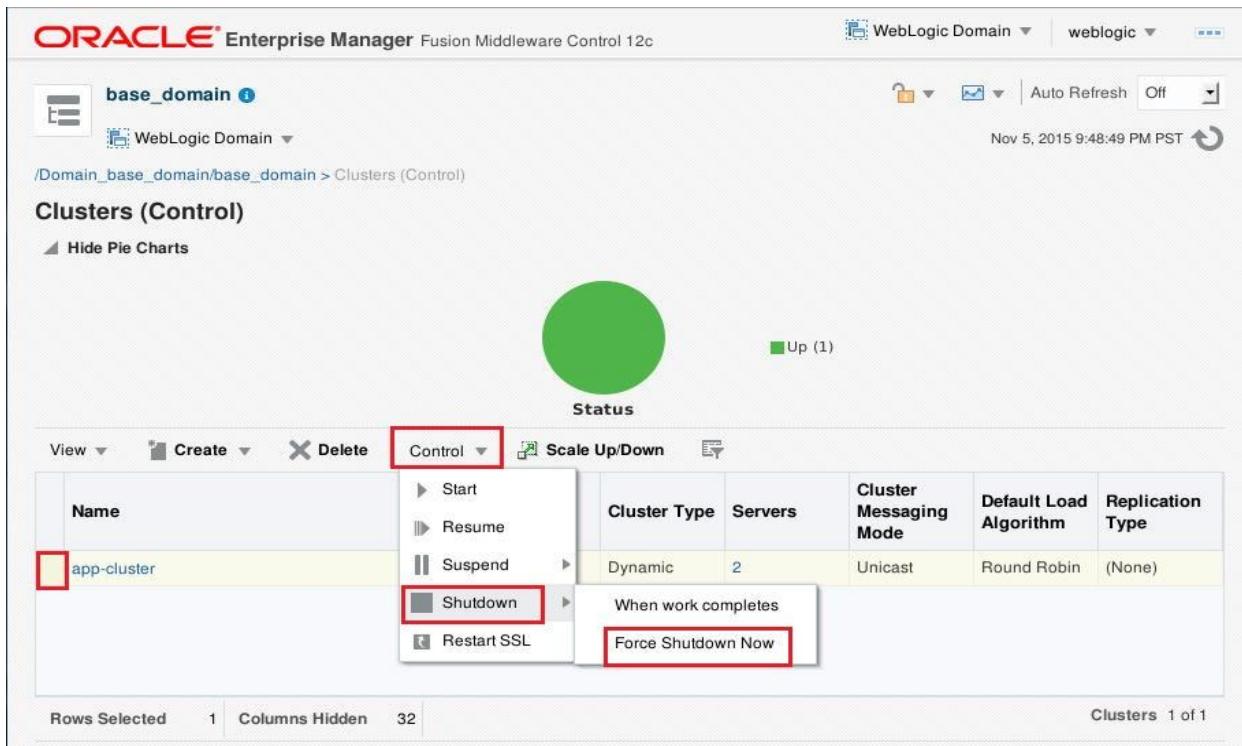


The screenshot shows the 'Clusters (Control)' page. A context menu is open over the row for 'app-cluster'. The menu items are: Start, Resume, Suspend, Shutdown, and Restart SSL. The 'Shutdown' item is highlighted with a red box, and a sub-menu for it is also shown, with 'Force Shutdown Now' highlighted with a red box.

- d. Open a new tab.
- e. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab5
- f. cp setDomainEnv.sh /u01/wins/wls1221/user_projects/domains/base_domain/bin/
- g. In above command we have modified the JAVA_OPTIONS as specified below.
`JAVA_OPTIONS="-XX:+UnlockCommercialFeatures -XX:+ResourceManagement -XX:+UseG1GC ${JAVA_OPTIONS} ${JAVA_PROPERTIES}"`
- h. Go back to Fusion middleware control then click on **WebLogic Domain -> Control -> Clusters**.
- i. Check the box near to **app-cluster** to make it highlighted and then click on **Control -> Start -> Start Servers**.
- j. tail -f /u01/wins/wls1221/user_projects/domains/base_domain/servers/app-cluster-1/logs/app-cluster-1.log
- k. In this tab, Click on Enter Terminal -> Set Title and app-cluster-1 then click on **OK**.
We will use these logs to monitor resource consumption manager lab.

Creating a Resource Manager and Configuring Resource Manager for a domain partition

- a. Go to FMW control <http://localhost:7001/em>
 - b. Enter weblogic/welcome1 as Username/Password then click on Login.
 - c. Click on **WebLogic Domain->Environment -> Resource Consumption Managers**.
 - d. Click on **Add Resource Manager** and Enter the following value then click on **OK**
- | | |
|-------------------|--------------|
| Resource Manager: | smallHeap |
| Policy Type: | HeapRetained |
| Shutdown: | 400 |
| Slow: | 250 |
| Notify: | 200 |

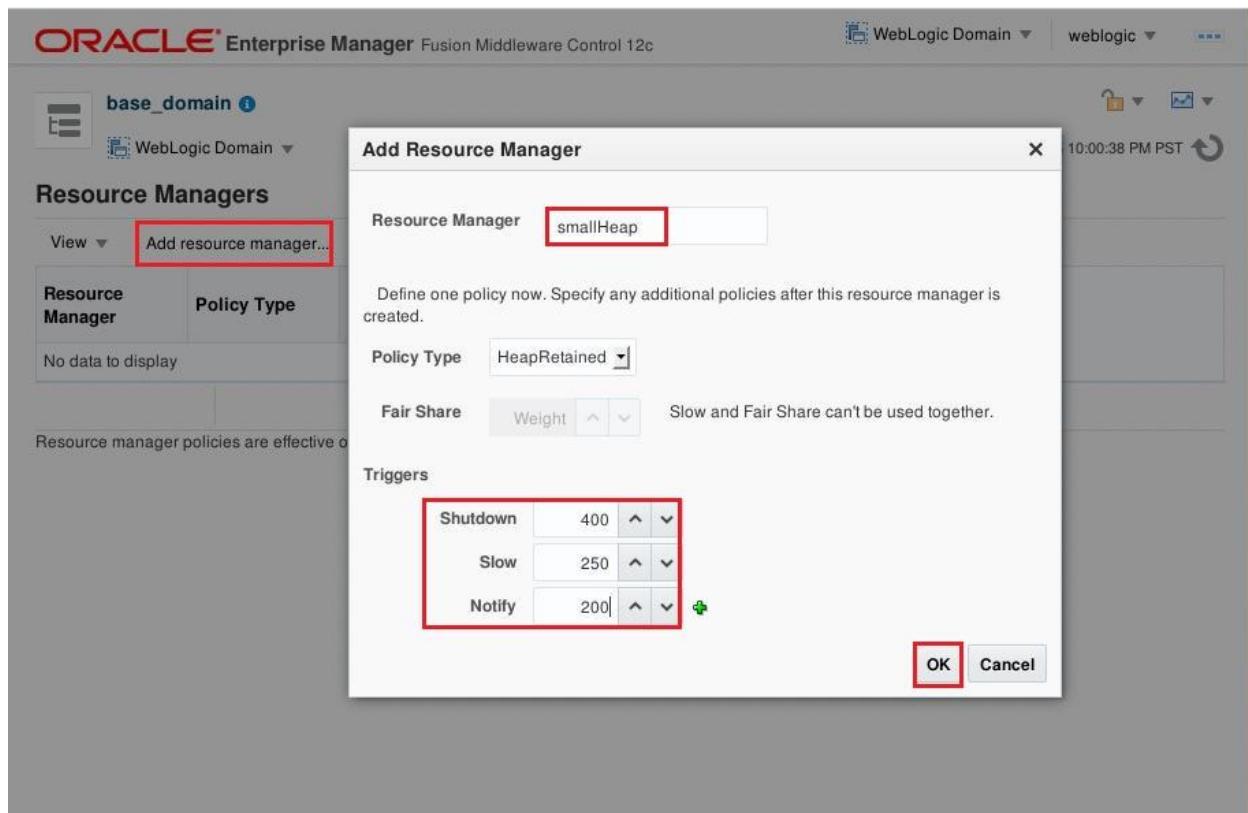

Associate the Resource Manager with Medrec-Dev domain partition.

- Click on **WebLogic Domain** -> **Environment->Domain Partition** then click on **Medrec-Dev**.
- Click on **Domain Partition** ->**Administration** -> **Resource Sharing**.

The screenshot shows the Oracle Enterprise Manager interface for the Medrec-Dev domain. The left sidebar has sections for Monitoring, Resource, Deployment, and Administration. Under Administration, the 'Resource Sharing' option is highlighted with a red box. The main content area displays 'General' settings for the partition, including state (Running), default targets (VT-Medrec-1), and various resource usage metrics like JDBC and JTA Usage and Resource Usage. The 'Resource Sharing' link in the dropdown menu is also highlighted with a red box.

- Under **Resource Manager Configuration**, and Select “**Use a Resource Manager configured for the domain**” and choose “**smallHeap**” then click on **Save**.

The screenshot shows the 'Partition Work Manager Configuration' and 'Resource Manager Configuration' pages for the Medrec-Dev partition. In the 'Partition Work Manager Configuration' section, the 'No Partition Work Manager' radio button is selected. In the 'Resource Manager Configuration' section, the 'Use a resource manager configured for the domain: smallHeap' radio button is selected and highlighted with a red box. The 'Save' button at the top right is also highlighted with a red box.

- d. Click on **Start Up** near Domain partition. Click on Close.



- e. Open a new tab.
- f. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab5
- g. ./DeployHeap.sh
- h. Close the tab.
- i. Go back to Firefox and type the URL: <http://localhost:7101/dp1/heapApp/>
- j. Enter 160 in **Allocate Heap** then click on Submit then observe the logs of app-cluster-1 managed server. After that no Warning message should be observed in the log as we didn't cross the boundary of any RCM action.

- k. Enter 50 in **Allocate Heap** then click on Submit then observe the logs of app-cluster-1 managed server. We will cross the first ("Notify") boundary of RCM actions. So we should see associated log message.

```
####<Nov 5, 2015 10:12:23 PM PST> <Notice> <RCM> <localhost.localdomain> <app-cluster-1> <Thread-73> <weblogic> <> <f11a4b64-f694-4af6-8b28-7f32a9f96d47-0000003c> <1446790343249> <[Notifying Quota Reached For Partition: Medrec-Dev] [severity-value: 32] [rid: 0] [Previous Usage: 207153216] [partition-id: cd3147a2-5e49-4731-bad1-94689b69cd5b] [Resource Name: com.oracle.weblogic.rcm.framework.base.HeapRetainedResourceAttributes] [Current Usage: 215825984] [partition-name: Medrec-Dev]> <BEA-2165799> <Resource Consumption Management Notification Message: Given quota has been reached for the partition and a notify action has been executed.>
```

- l. Enter 50 in **Allocate Heap** then click on Submit then observe the logs of app-cluster-1 managed server. We crossed the second limit ("Slow") so the associated message should be seen in the log.

```
####<Nov 5, 2015 10:14:04 PM PST> <Notice> <RCM> <localhost.localdomain> <app-cluster-1> <Thread-72> <weblogic> <> <f11a4b64-f694-4af6-8b28-7f32a9f96d47-0000003d> <1446790444011> <[Slow Action Quota Reached For Partition: Medrec-Dev] [Current Usage: 299741448] [severity-value: 32] [Previous Usage : 298576032] [Was Required action to Slow the Partition is executed?: true] [Resource Name: com.oracle.weblogic.rcm.framework.base.HeapRetainedResourceAttributes] [partition-id: cd3147a2-5e49-4731-bad1-94689b69cd5b] [partition-name: Medrec-Dev] [rid: 0]> <BEA-2165800> <Resource Consumption Management Slow Message: Given quota has been reached for the partition and a slow action has been executed.>
```

- m. Enter 150 in **Allocate Heap** then click on Submit then observe the logs of app-cluster-1 managed server. This will exceed the limit of memory allowed to be used by that partition. So to prevent other partitions from suffering of lack of memory WebLogic will shutdown the partition.

```
####<Nov 5, 2015 10:15:15 PM PST> <Notice> <RCM> <localhost.localdomain> <app-cluster-1> <Thread-74> <weblogic> <> <f11a4b64-f694-4af6-8b28-7f32a9f96d47-0000003e> <1446790515227> <[severity-value: 32] [Proposed Usage: 459764600] [rid: 0] [partition-id: cd3147a2-5e49-4731-bad1-94689b69cd5b] [Shutdown Action Quota Reached For Partition: Medrec-Dev] [Resource Name: com.oracle.weblogic.rcm.framework.base.HeapRetainedResourceAttributes] [Current Usage: 442240104] [partition-name: Medrec-Dev]> <BEA-2165801> <Resource Consumption Management Shutdown Message: Given quota has been reached for the partition and a shutdown action has been executed.>
```

- i. Refresh the page, <http://localhost:7101/dp1/heapApp/> which return 404 and confirm shutdown of the domain partition Medrec-dev in managed server 1.



Error 404--Not Found

From RFC 2068 *Hypertext Transfer Protocol -- HTTP/1.1*:

10.4.5 404 Not Found

The server has not found anything matching the Request-URI. No indication is given of whether the condition is temporary or permanent.

If the server does not wish to make this information available to the client, the status code 403 (Forbidden) can be used instead. The 410 (Gone) status code SHOULD be used if the server knows, through some internally configurable mechanism, that an old resource is permanently unavailable and has no forwarding address.

Note: As this domain partition is target to virtual target which is target at cluster which consists of two managed servers. So this domain partition stopped working on managed server 1, but if you access the application on managed server 2, you still will be able to access the application in this domain partition. If similar things happen in managed server 2 and domain partition shutdown on managed server 2 as well, then domain partition will be shutdown.

LAB 6: OTD INTEGRATION AND RESOURCE MIGRATION

Overview

This lab describes how Oracle Traffic Director can front end a WLS MT Deployment topology for a large enterprise, providing an integrated, end to end administration experience for the server life cycle, and partition management.

For this lab, we installed OTD in Collocated mode. We create one domain otd_domain for OTD instance then we show how to register an OTD instance in WebLogic Domain base_domain. Then we show how you can create partition front ended by OTD.

Oracle Traffic Director has an administration plug in which is responsible for handling life cycle events and automatically configuring Oracle Traffic Director with the corresponding configuration

When you create a WLS MT partition, a corresponding Oracle Traffic Director partition is created for you. The Oracle Traffic Director partition is simply a grouping with the same name as the partition and the resource group. The life cycle of an Oracle Traffic Director partition and its corresponding artifacts are linked to the life cycle of the partition.

The Oracle Traffic Director console provided a partition table with the list of Oracle Traffic Director Partitions to identify the Oracle Traffic director artifacts that are mapped to partitions and resource groups.

Oracle Traffic Director Artifacts map to WebLogic Server MT artifacts as follows:

- Each cluster maps to an origin server pool.
- The hostnames of a virtual target that is associated with the partitions and/or resource groups maps to a virtual server.
- Each partition or resource group maps to a route within the virtual server corresponding to the hostname of the virtual target.


In this lab, we are going to perform the below operations.

- We create an OTD domain; in that domain we create a machine and OTD configuration.
- We register that OTD Runtime instance inside the WebLogic domain.
- We create a domain partition front ended by OTD.
- We deploy a simple application to verify the OTD integration with domain partition.
- We migrate a resource group from one cluster to other cluster.


Note: - SCRABBLE APPLICATION NEEDS INTERNET CONNECTION, OTHERWISE, YOU WILL NOT BE ABLE TO SEE GRAPH IN IT. IF YOU DON'T HAVE IT, YOU CAN USE HEAPAPP TO DEPLOY IN DP4.

Create OTD Restricted JRF Domain


- a. Open a new tab.
- b. cd /u01/wins/wls1221/oracle_common/common/bin/
- c. ./config.sh
- d. Select “Create a new domain” and enter “**/u01/wins/wls1221/user_projects/domains/otd_domain**” as Domain Location then Click on Next.

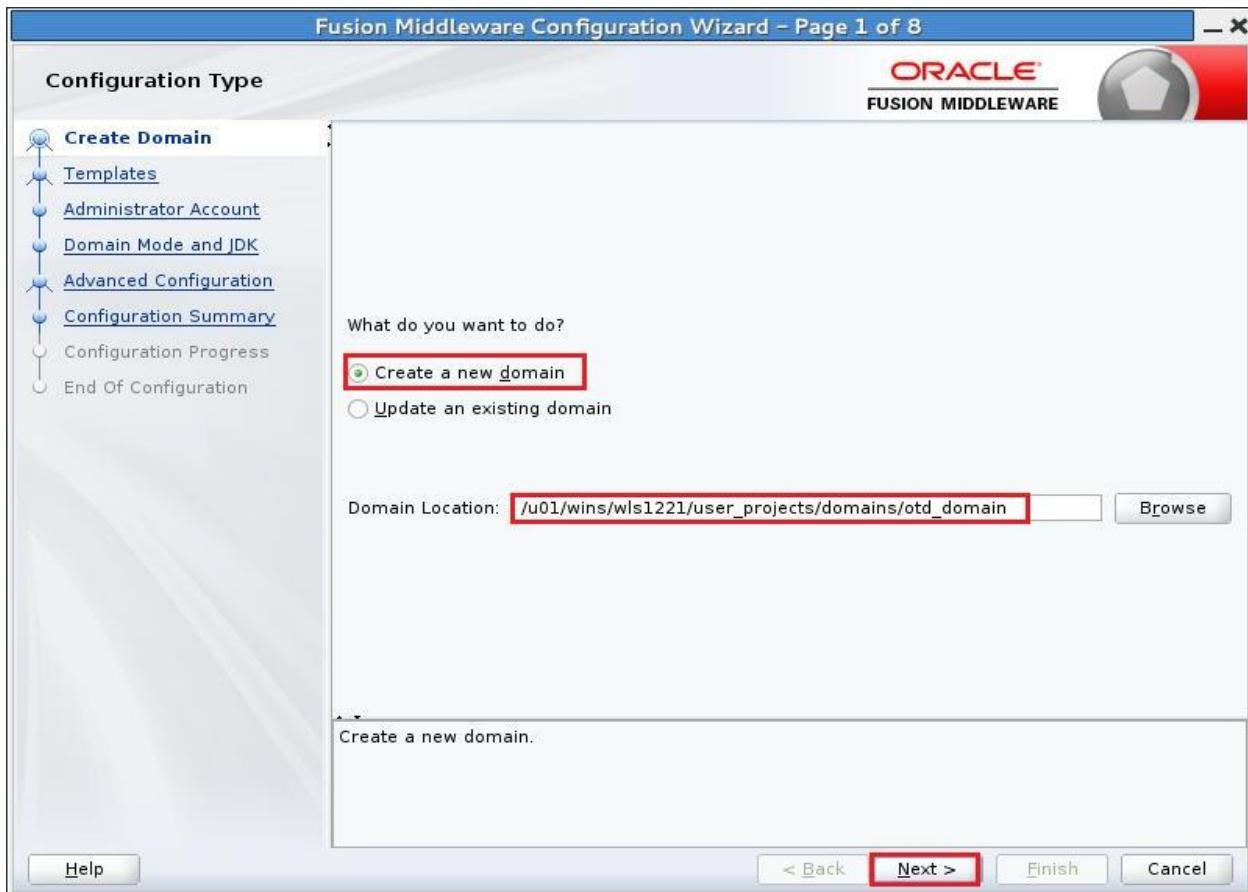


- e. Enter “**Oracle Traffic Director- Restricted JRF**” Template as it also selects other required template then Click on Next.

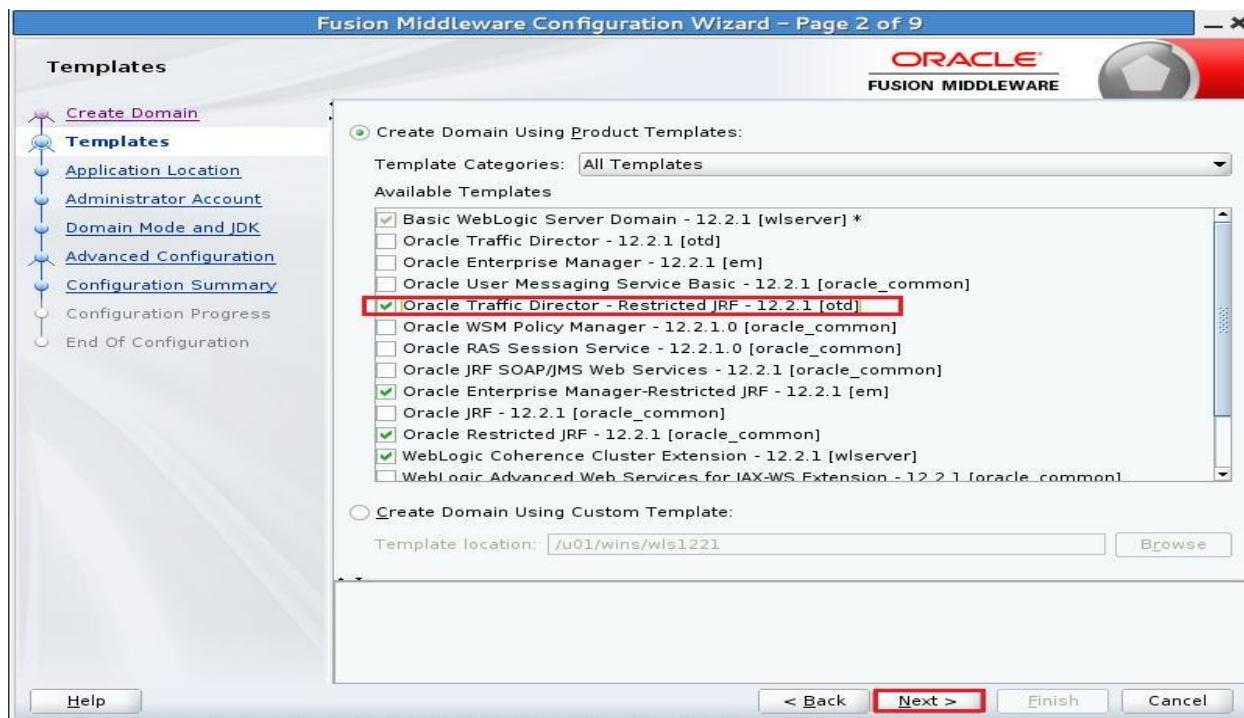


- f. Enter “**/u01/wins/wls1221/user_projects/applications/otd_domain**” as Application Location then Click on Next.

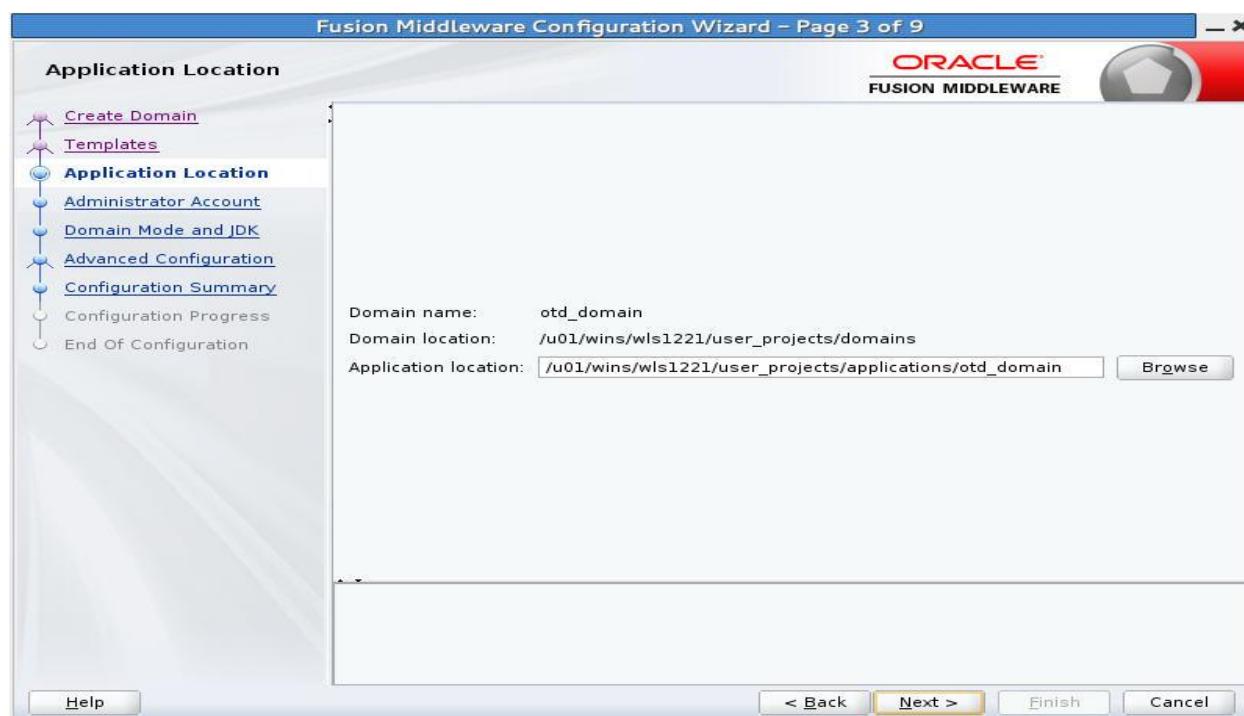

- g. Enter “**weblogic/welcome1**” as **Username/Password** then Click on Next.
- h. Leave Default in **Domain Mode and JDK** then Click on Next.
- i. In **Advanced Configuration**, Select the box near **Administration Server** then Click on Next.

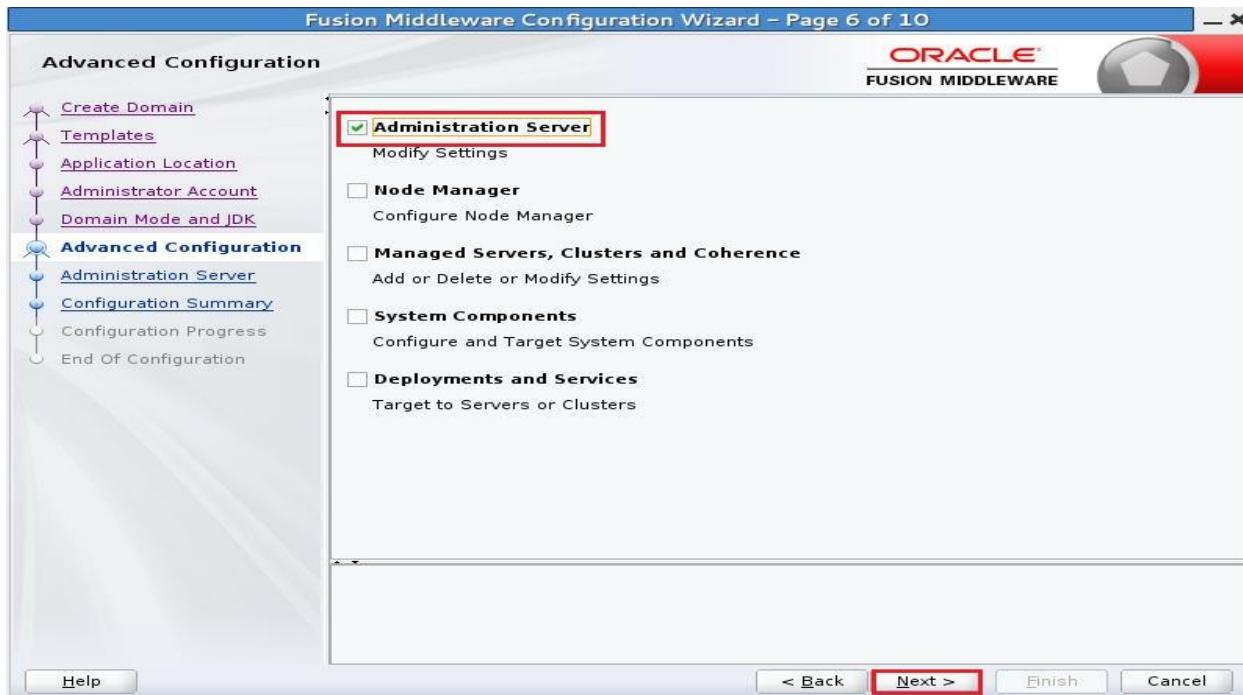

- j. Change Listen port to **8001** then click on Next.

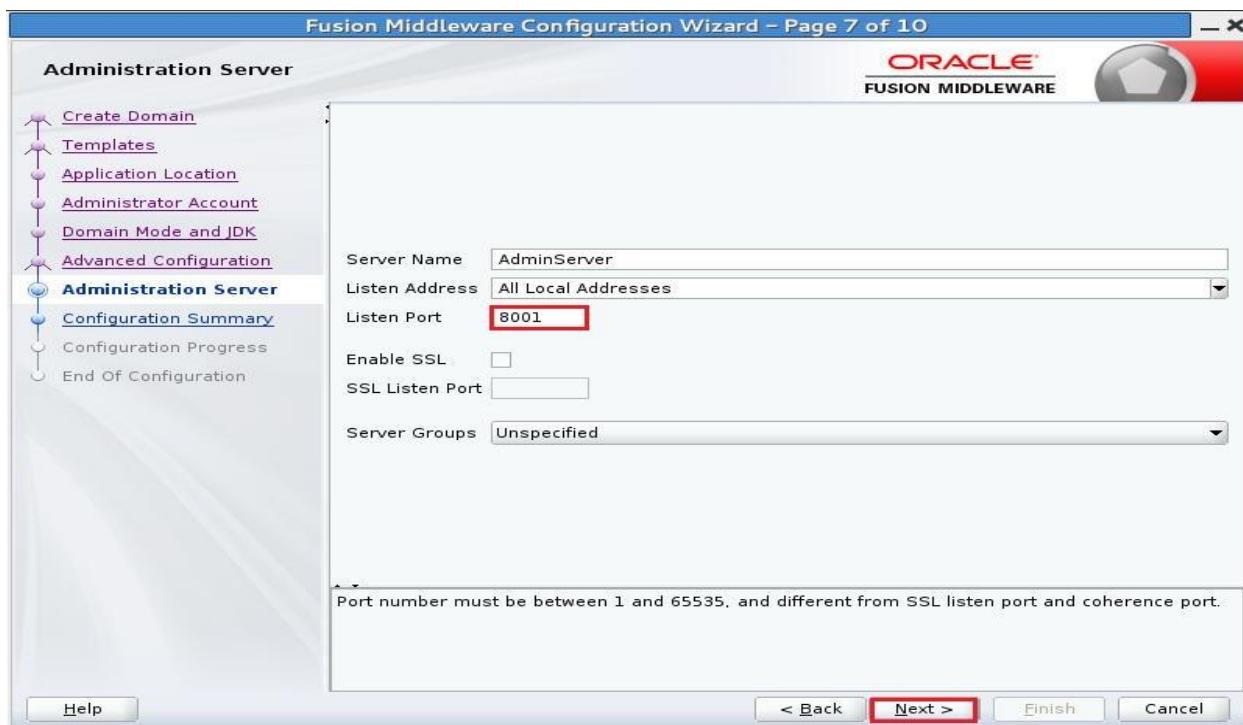

- k. Click on **Create**.
- l. Click on **Next** then Click on **Finish**.
- m. cd /u01/wins/wls1221/user_projects/domains/otd_domain/
- n. ./startWebLogic.sh
- o. In terminal, Click on **Terminal -> Set Title**. Enter **otd_admin** as Title then click on OK.

```

oracle@localhost:u01/wins/wls1221/user_projects/domains/otd_domain
File Edit View Search Terminal Help
2015-11-05 01:40:58.5
' for queue: 'weblogi
"cache-factory-config
2015-11-05 01:40:58.5
' for queue: 'weblogi
"cache-factory-build
2015-11-05 01:40:58.5
' for queue: 'weblogi
"/custom-mbeans.xml"
Oracle Coherence Vers
Grid Edition: Develo
Copyright (c) 2000, 2
2015-11-05 01:40:58.7
d: '3' for queue: 'weblogic.kernel.default (seti-tuning)', member=n/a): Loaded FMW commons version:
12.2.1-0-0-SNAPSHOT b60603
1. 80x24
2. 80x43
3. 132x24
es. All rights reserved.
2.2.1.0.0 <Info> (thread=[STANDBY] ExecuteThrea

```

- p. Open a New tab.
- q. cd /u01/wins/wls1221/user_projects/domains/otd_domain/
- r. vi nodemanager/nodemanager.properties
- s. Change Listen Port to 5557 then save the file and close it.


```

#Node manager properties
#Thu Nov 05 01:39:36 PST 2015
DomainsFile=/u01/wins/wls1221/user_projects/domains/otd_domain/nodemanager/nodemanager.domains
LogLimit=0
PropertiesVersion=12.2.1
AuthenticationEnabled=true
NodeManagerHome=/u01/wins/wls1221/user_projects/domains/otd_domain/nodemanager
JavaHome=/u01/java/jdk1.8.0_60
LogLevel=INFO
DomainsFileEnabled=true
StartScriptName=startWebLogic.sh
ListenAddress=localhost
NativeVersionEnabled=true
ListenPort=5557
LogIostderr=true
SecureListener=true
LogCount=1
StopScriptEnabled=false
QuitEnabled=false
LogAppend=true
StateCheckInterval=500
CrashRecoveryEnabled=false
StartScriptEnabled=true
LogFile=/u01/wins/wls1221/user_projects/domains/otd_domain/nodemanager/nodemanager.log
LogFormatter=weblogic.nodemanager.server.LogFormatter
ListenBacklog=50

```

- t. bin/startNodeManager.sh
- u. In tab, Click on **Terminal -> Set Title**. Enter **otd_nm** as Title then click on OK.

- v. Go to Firefox and type the Fusion Middleware Control URL <http://localhost:8001/em>.
w. Enter “weblogic/welcome1” as Username/Password then click on Login.

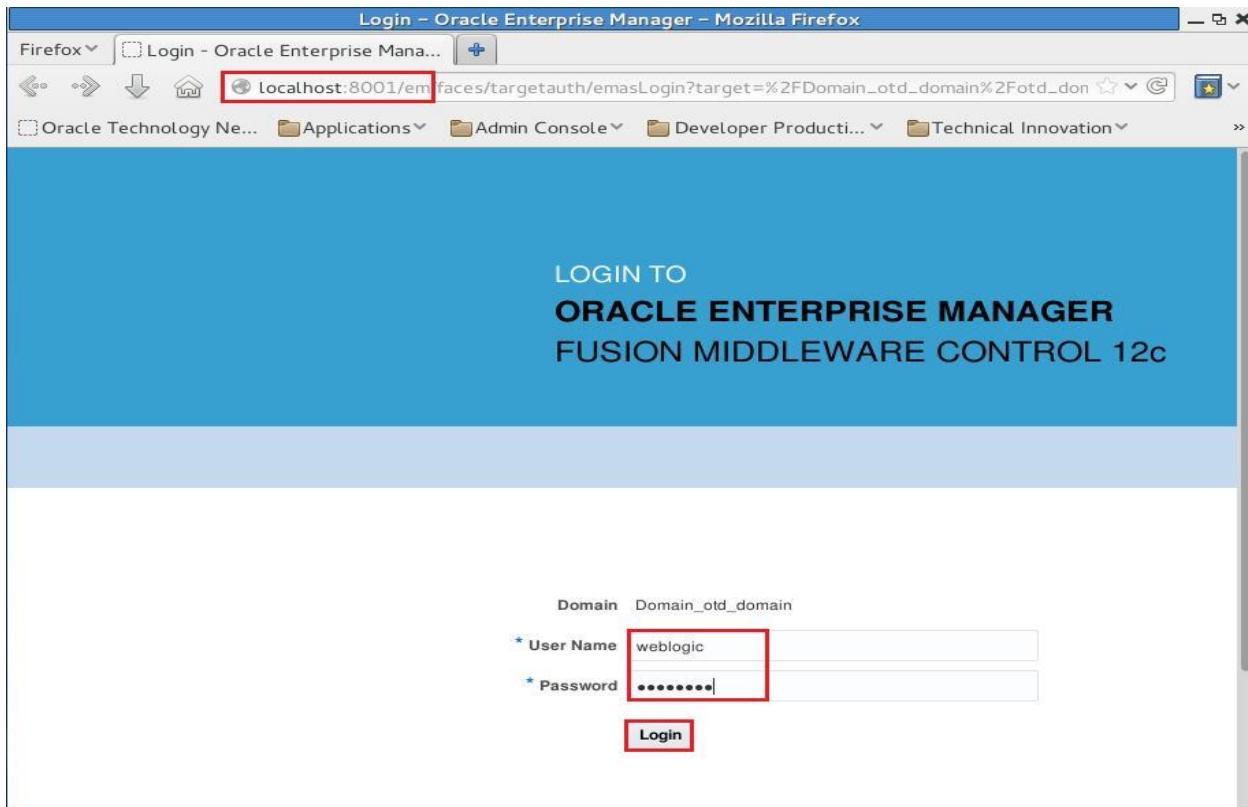

- x. Create a Machine.
i. Click on WebLogic Domain ->Environment ->Machines.

Server	Machine	State
		Running

- ii. Click on Create, Enter “**otd_machine**” as Name and “**Unix**” as Machine OS then Click on Next.


The screenshot shows the Oracle Enterprise Manager interface for creating a machine. The top navigation bar says "ORACLE Enterprise Manager Fusion Middleware Control 12c" and "weblogic". Below it, a progress bar indicates "otd_domain" with three steps: "Machine Identity" (selected), "Node Manager Properties", and "Review". The main content area is titled "Create a Machine: Machine Identity". It contains fields for "Name" (set to "otd_machine") and "Machine OS" (set to "Unix"). At the bottom right are buttons for "Back", "Step 1 of 3", "Next" (highlighted with a red box), "Create", and "Cancel".

- iii. Change Listen Port to **5557** then Click on Next.

The screenshot shows the Oracle Enterprise Manager interface for creating a machine, specifically the "Node Manager Properties" step. The top navigation bar and progress bar are identical to the previous screenshot. The main content area is titled "Create a Machine: Node Manager Properties". It includes a note about configuring Node Manager for Managed Servers. Below it, there's a "Node Manager Type" dropdown set to "SSL". Under "For Java-based Node Manager, enter the listen address and listen port.", the "Listen Address" is "localhost" and the "Listen Port" is "5557" (highlighted with a red box). At the bottom right are buttons for "Back", "Step 2 of 3", "Next" (highlighted with a red box), "Create", and "Cancel".

- iv. Click on **Create**.


- y. Create an OTD Configuration.
- Click on **WebLogic Domain -> Administration -> OTD Configurations**.

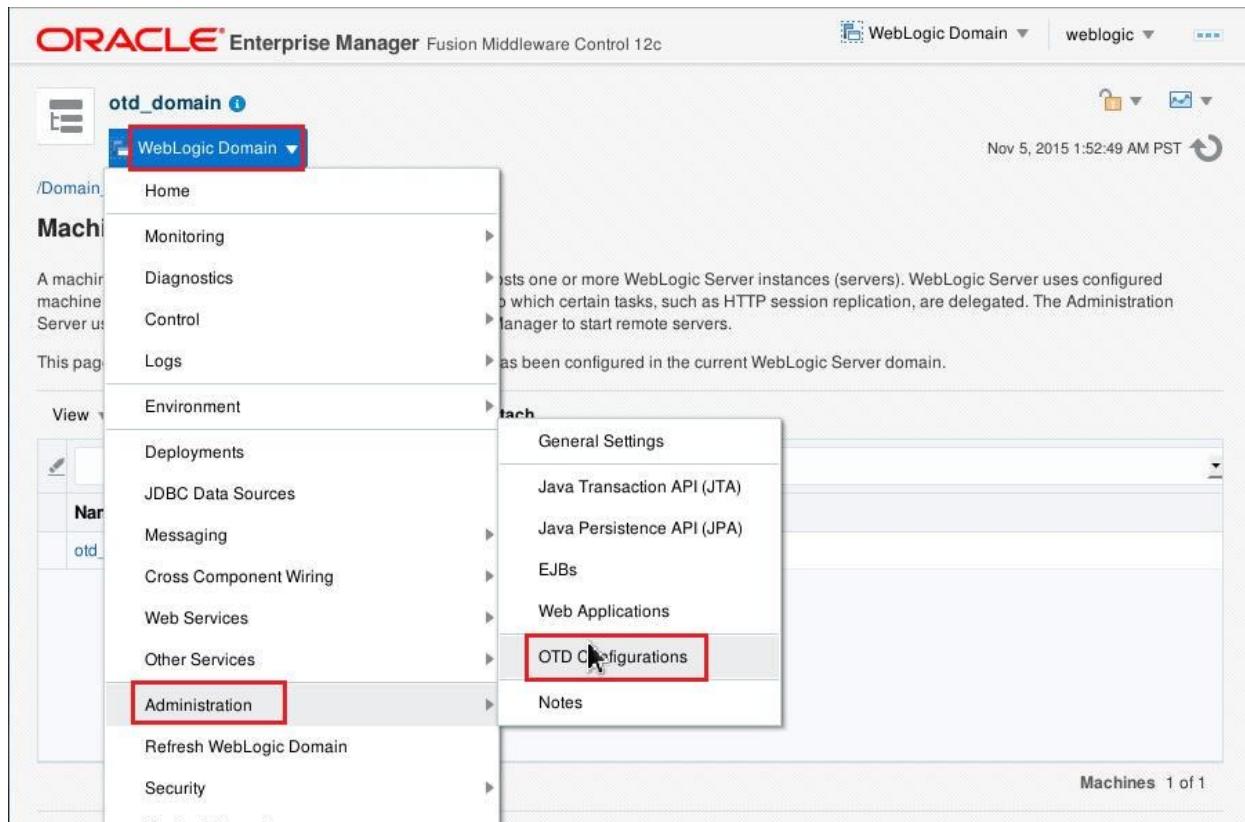

- Click on Create.
- Enter "mt" as Name and "HTTP" as Origin Server Type then click on Next.

The screenshot shows the 'New Configuration Wizard' with 'Step 1 of 5' selected. The 'General' tab is active. The 'Create Configuration: General' section contains a text input for 'Name' with 'mt' entered, and a radio button for 'Origin Server Type' with 'HTTP' selected. A tooltip for the 'Name' field explains its purpose and lists restrictions. A tooltip for the 'Origin Server Type' field provides examples. The 'Next' button is highlighted with a red box.

- Leave Default in "Create Configuration: Listener" then click on Next.
- Leave Default in "Create Configuration: Server Pool" then click on Next.
- Select the "otd_machine" then click on Next.

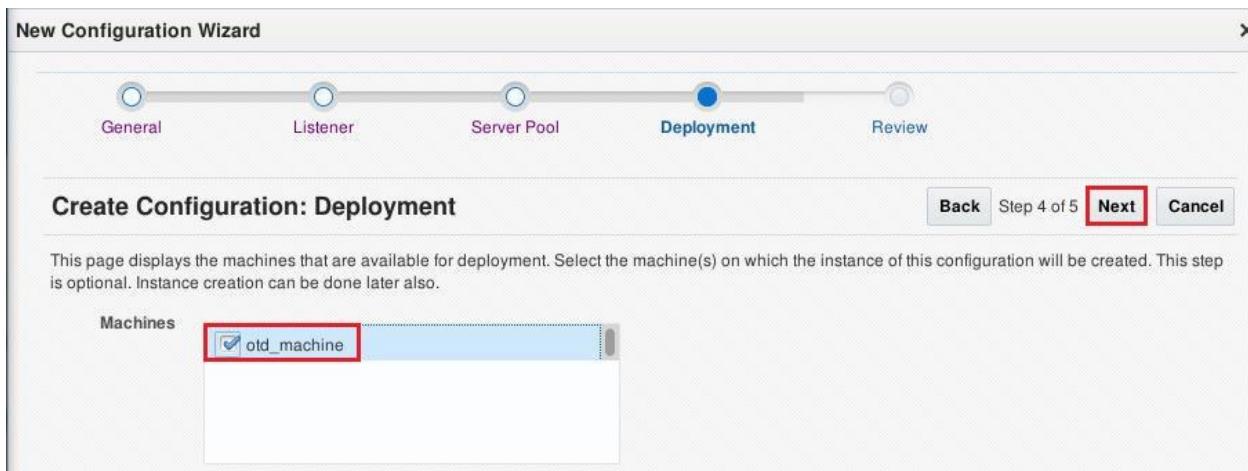

- vii. Click on “**Create Configuration**”.
- viii. Check the box near “**mt**” to make it highlighted and then click on **Start Instances**. Click on Close.

ORACLE® Enterprise Manager Fusion Middleware Control 12c

WebLogic Domain ▾ weblogic ▾ ...

Nov 5, 2015 2:00:12 AM PST

otd_domain ⓘ

WebLogic Domain ▾

i Information

Successfully created configuration "mt".

Successfully created instance(s) of configuration "mt" on machine(s) "otd_machine".
All changes have been activated.

Oracle Traffic Director Configurations

This page displays all the Oracle Traffic Director configurations. A configuration is a collection of elements that determine the run-time behavior of an Oracle Traffic Director instance. Click on 'Delete' to delete the selected configuration.

Configuration Name	Target Full Name
mt	/Domain_otd_domain/otd_domain/mt

Create... Duplicate Delete... Stop Instances Start Instances



Note: Go to Firefox and type the URL <http://localhost:8080> to verify that server is listening.

The screenshot shows a Firefox browser window with the address bar set to 'localhost:8080'. The main content area displays a large red-bordered box containing the text 'Service Unavailable'. Below this, a smaller message reads 'The server is too busy to respond to your request. Please try again later.'

Registering an OTD Runtime Instance

- i. Go to base domain Fusion Middleware Control Console <http://localhost:7001/em> .
- ii. Enter weblogic/welcome1 as User Name/Password then click on Login.
- iii. Click on **Weblogic Domain -> Environment -> OTD Runtimes**.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. The left sidebar is collapsed, showing 'base_domain'. The main navigation bar has 'WebLogic Domain' selected. The 'Environment' menu item is highlighted with a red box. The 'OTD Runtimes' sub-menu item is also highlighted with a red box. A message box in the center states 'All changes have been activated.' To the right, a table lists 'OTD Runtimes' with one entry: a partition named 'n' with replication type '(None)', multicast address '239.192.0.0', and multicast port '7001'. The table has columns for ID, Replication Type, Multicast Address, and Multicast Port. The footer of the table indicates 'Clusters 1 of 1'.

iv. Click on **Register Runtime**.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. The top navigation bar includes 'ORACLE Enterprise Manager' and 'Fusion Middleware Control 12c'. Below it, there's a breadcrumb trail: 'base_domain' > 'WebLogic Domain'. The main content area is titled 'OTD Runtimes'. A sub-header states: 'Oracle Traffic Director can be used to front-end domain partitions created in this WebLogic domain. Oracle Traffic Director can be installed within this same domain or in a separate domain. OTD runtimes need to be registered with this WebLogic domain before they can be used.' Below this, there's a table with columns: 'Name', 'OTD Configuration Name', 'Admin Server Host', 'Admin Server Port', 'Username', and 'OTD Domain Name'. A message at the bottom says 'No Oracle Traffic Director runtimes have been registered in this WebLogic domain.'

v. Enter the following and then click on OK.

Runtime Name:	otd_runtime
OTD Configuration Name:	mt
Admin Server Host:	localhost
Admin Server Port:	8001
Username:	weblogic
Password:	welcome1
OTD Domain Name:	otd_domain

The screenshot shows the 'Register Runtime' dialog box. The title bar says 'Register Runtime'. The instructions inside say: 'An OTD configuration will be used to front-end domain partitions. Provide the OTD configuration name and connection information (host, port and credentials) for the WebLogic Admin Server where this configuration is located.' There are six input fields, each with a red box highlighting it: 'Runtime Name' (value: otd_runtime), 'OTD Configuration Name' (value: mt), 'Admin Server Host' (value: localhost), 'Admin Server Port' (value: 8001), 'Username' (value: weblogic), and 'OTD Domain Name' (value: otd_domain). At the bottom right are 'OK' and 'Cancel' buttons, with 'OK' also having a red box.

Creating Domain Partition front ended by OTD

- a. Click on **WebLogic Domain -> Environment ->Virtual Targets**.
- b. Click on Create.
- c. Enter **VT-1** as Name and **/dp4** as Uri Prefix then click on Add to Enter **localhost** as Host Name then click on Next.

ORACLE® Enterprise Manager Fusion Middleware Control 12c

base_domain

General Targets

Create Virtual Target: General

Name * VT-1

Uri Prefix /dp4

Hosts

Specify the host name(s) that will be used for front-end access. If you are not using Oracle Traffic Director (OTD) to load balance connections for a domain partition, specify the actual host name(s) of the WebLogic server cluster or managed server. If you are using OTD to load balance connections for a domain partition, specify the host name(s) of the OTD administration server.

+ Add X Delete

Host Name

localhost

Back Step 1 of 2 **Next** Cancel

- d. Select “app-cluster” as Cluster then click on **Create**.

ORACLE® Enterprise Manager Fusion Middleware Control 12c

base_domain

General Targets

Create Virtual Target: Targets

Choose a server or cluster to be associated with this virtual target.

Cluster app-cluster

Server

Logging Configuration

Log File Name

Notes

Notes

Back Step 2 of 2 **Create** Cancel

- e. Click on **WebLogic Domain -> Environment -> Domain Partition**.
- f. Click on **Create**.

- g. Enter **dp4** as name and Check the box for “**Use OTD for load balancing**” and select “**otd_runtime**” then click on Next.

Create Domain Partition: General

Use this page to specify general attributes for this domain partition.

* Name Security Realm

Primary Identity Domain

Load Balancer Configuration

If you wish to use a load balancer to front-end this domain partition, choose an Oracle Traffic Director runtime from the list of registered runtimes shown below. If you wish to register a new OTD runtime, please use the Environment->OTD Runtimes menu item on the WebLogic Domain menu.

Use OTD for load balancing
 OTD Runtime

- h. Check the box for “VT-1” as shown below then click on Next.

Create Domain Partition: Available Targets

Select the virtual targets that will be available for this domain partition to use. Note that virtual targets can only be used by one partition; so, only available virtual targets are listed below.

Select	Virtual Target	Set as Default
<input checked="" type="checkbox"/>	VT-1	<input checked="" type="checkbox"/>

- i. Enter **app4RG** as Resource Group Name and Move **VT-1** to **Selected Targets** then click on Next.

Create Domain Partition: Resource Group

Back Step 3 of 4 **Next** Cancel

A resource group needs to be created within a partition before you can deploy applications or resources. The resource group can optionally extend a resource group template specified at the domain level.

* Resource Group Name: app4RG

Resource Group Template: None

Targets for the Resource Group: Select a target for the resource group from the list of available targets. If the partition has a default target specified, the resource group will implicitly inherit that target.

Available Targets	Selected Targets
	VT-1

- j. Review the Configuration then click on **Create**.
k. Check box near to **dp4** and click on **Control -> Start**. Click on Close.

Domain Partitions 4 of 4

Name	Status	OTD Partition	Realm	Default Targets	Available Targets
dp2	Up			VT-Medrec-2	VT-Medrec-2
dp3	Running			VT-daytrader	VT-daytrader
dp4	Shutdown	dp4		VT-1	VT-1
Medrec-Dev	Running			VT-Medrec-1	VT-Medrec-1

Deploying simple application to test OTD integration with weblogic

Here we are going to deploy heapApp.war which we used in Lab5. We will access that application through **load balancer** now.

- a. Click on dp4.
- b. Click on **Domain Partition -> Administration -> Resource Groups**.
- c. Click on Resource Group **app4RG**.
- d. Click on **Deployments** tab, and then click on **Deployment -> Deploy**.

The screenshot shows the Oracle Enterprise Manager interface for a WebLogic Domain named 'weblogic'. The top navigation bar includes 'WebLogic Domain' and 'weblogic'. Below the header, there are buttons for 'Start Up' and 'Shut Down'. The URL in the address bar is '/Domain_base_domain/base_domain/dp4 > Resource Groups > Resource Group : app4RG'. The main content area is titled 'Resource Group : app4RG' and shows the 'Deployments' tab selected. A sub-header states: 'This page displays a list of Java EE applications and standalone application modules that have been deployed to this resource group.' Below this, there is a table with columns: Name, Status, State, Health, and Type. A tooltip for the 'Deploy' button indicates: 'Deploys Java EE applications, resource adapters, and libraries.' At the bottom right of the table, it says 'Deployments 0 of 0'. The 'Deploy' button is highlighted with a red box.

- e. Select “Archive or exploded directory is on the server where Enterprise Manager is running” then click on **Browse**. Select the file **ScrabbleStage.war** from **/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab6/** location then click on **OK**.

ORACLE® Enterprise Manager Fusion Middleware Control 12c

base_domain [i](#)

Select Archive Select Target Application Attributes Deployment Settings

Deploy Java EE Application: Select Archive

Back Step 1 of 4 [Next](#) [Cancel](#)

Scope
The scope that this application will be deployed to : Resource group "app4RG" in domain partition "dp4"

Archive or Exploded Directory
Java EE archives, Web Modules (WAR files), EJB Modules (EJB JAR files), Resource Adapter Modules (RAR files), Coherence Archives (GAR files), JDBC Modules, JMS Modules, and library files (Jar files) can be deployed. You can also deploy an exploded archive that is present on the server where Enterprise Manager is running.

Archive is on the machine where this Web browser is running.
 Archive or exploded directory is on the server where Enterprise Manager is running.

Browse... No file selected.

/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab6/ScrabbleStage.war [Browse...](#)

Deployment Plan
The deployment plan is a file that contains the deployment settings for an application. You can use a previously saved deployment plan for this application. Later in the deployment process, you can optionally edit the deployment plan and save it for a future deployment of this application. If you

Inform
Use this page to applications through the Metadata Service. Take advantage of the Application Deployment Framework (ADF). If your application is a composite, use Composite deployment. If your application is a composite or it uses MDS repository connections, then use the Oracle WebLogic Administration

- f. Click on **Next** then click on **Deploy**. Click on **Close**.
- g. Go to Firefox and type the URL <http://localhost:8080/dp4/ScrabbleStage/Scrabble.jsp> .

Firefox ▾ [Resource Group : app4RG: b...](#) [Zero Downtime Patching De...](#) +

localhost:8080/dp4/ScrabbleStage/Scrabble.jsp

Oracle Technology Ne... Applications Admin Console Developer Producti... Technical Innovation Operations >

ORACLE®

Zero Downtime Patching Demo - Scrabble Example - Stage Mode - Version 1


Illustrating session replication and continuous serviceability

This Zero Downtime Patching Demo uses a JSP to demonstrate the use of replication of a session in memory, using an OTD load balancer front end. An end-user client adds or deletes words to a session. The words are scored according to the rules of a popular board game and then displayed in the table. Server affinity allows WebLogic Server to retrieve the same session the next time the client visits the page.

The server currently hosting this session is app-cluster-2 (WebLogic Server 12.2.1.0.0 Tue Oct 6 10:05:47 PDT 2015 1721936)

Migration Resource Group from one Cluster to other Cluster

Now we are going to migrate Resource Group app4RG from app-cluster to another cluster. As the application deployed in app4RG are front ended by OTD, when you migrate your resource group on other cluster. WebLogic automatically detect the server setting and you can access the application continuously without doing any manual configuration.

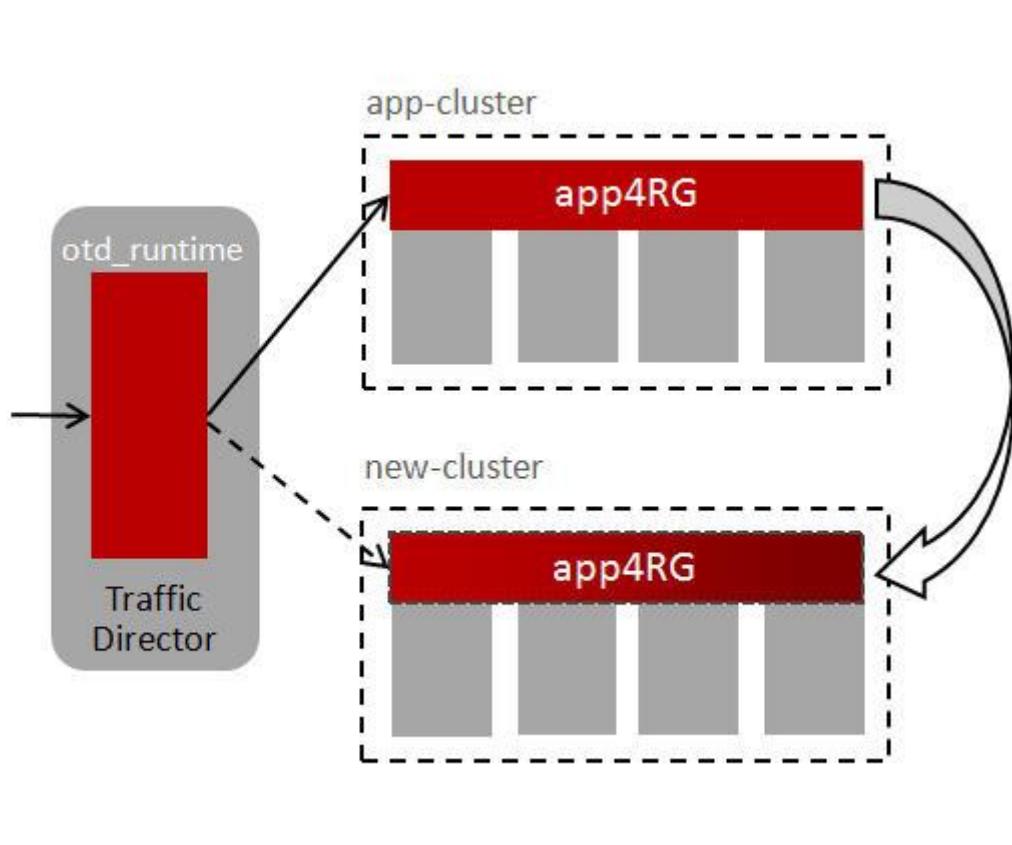

- When you click on **migrate** the following actions performs:
- Migrate API is called
- Resource Group starts on new hosts
- Sessions are replicated to new hosts.
- New origin server pool added to the OTD Configuration
 - Old pool used for sticky request to old pool only
 - New pool used for all new requests.
- Graceful shutdown called on resource group on original hosts.
- Virtual target configuration updated with new cluster only.

So using the same URL, you can access the application.

- a. Go back to Fusion middleware control console <http://localhost:7001/em>
- b. Create a new Cluster.
 - i. Click on **WebLogic Domain -> Environment -> Clusters.**
 - ii. Click on **Create -> Dynamic Cluster.**
 - iii. Enter **new-cluster** as Name then click on Next.
 - iv. Enter 1 as Dynamic Cluster Size then click on Next.
 - v. Select the box for "**Use a single machine for all dynamic servers**" and choose "**machine**" as Selected Machine then click on Next.
 - vi. Enter 9100 and 10101 as **Base Listen Port** and **SSL Base Listen Port** Respectively then click on Next.
 - vii. Review the Configuration then click on **Create**.
 - viii. Click on **WebLogic Domain -> Control -> Clusters**.
 - ix. Check the box near **new-cluster** to make it highlighted and then click on **Control -> Start -> Start Servers**.

Note: Before going to next step, wait till managed server in new-cluster get started, you can monitor the progress in base_nm tab.

- c. Migration of Resource Group.
 - i. Click on **WebLogic Domain -> Environment -> Resource Groups..**
 - ii. Check the box near to app4RG to make it highlighted and then click on Migrate. Select **new-cluster** as New Target then click on Migrate. In Confirmation window, click on Migrate.
 - iii. Once you notice "**Migrating resource group "app4RG" – Completed successfully**" message then click on Close.

The screenshot shows the Oracle Enterprise Manager interface for a WebLogic domain named 'base_domain'. On the left, there's a sidebar for 'Resource Groups' with a table listing several groups: app2RG, app3RG, app4RG (which is selected and highlighted), and appRG. The main panel displays a 'Resource Group Migration' dialog. Inside the dialog, the 'Resource Group' is set to 'app4RG', 'Virtual Target' is 'VT-1', 'Current Target' is 'app-cluster (Cluster)', and 'New Target' is set to 'new-cluster (Dynamic cluster)' (highlighted with a red box). A confirmation dialog box is overlaid on the main screen, stating 'Migrating resource group "app4RG" - Completed Successfully' and providing a detailed message about the migration. The 'Close' button in the confirmation dialog is also highlighted with a red box.

Access Application through OTD

- Go to Firefox and type the URL <http://localhost:8080/dp4/ScrabbleStage/Scrabble.jsp>.

The screenshot shows a Firefox browser window with the address bar containing "localhost:8080/dp4/ScrabbleStage/Scrabble.jsp". The page itself is titled "Zero Downtime Patching Demo - Scrabble Example - Stage Mode - Version 1" and features the ORACLE logo. Below the title, it says "Illustrating session replication and continuous serviceability". A note at the bottom states: "This Zero Downtime Patching Demo uses a JSP to demonstrate the use of replication of a session in memory, using an OTD load balancer front end. An end-user client adds or deletes words to a session. The words are scored according to the rules of a popular board game and then displayed in the table. Server affinity allows WebLogic Server to retrieve the same session the next time the client visits the page." A red box highlights the text "The server currently hosting this session is new-cluster-1 (WebLogic Server 12.2.1.0.0 Tue Oct 6 10:05:47 PDT 2015 1721936)".

- As the Resource group migrated from app-cluster to new-cluster. But still you are able to access the application through same URL. Load balancer is redirecting all requests to new cluster. new-cluster-1 is running on 9101 port and app-cluster-2 is running on 7102.

The screenshot shows a Firefox browser window with the address bar containing "localhost:7102/dp4/ScrabbleStage/Scrabble.jsp". The page displays an "Error 404--Not Found" message. Below it, a section titled "From RFC 2068 Hypertext Transfer Protocol -- HTTP/1.1:" contains the definition of the 404 status code: "The server has not found anything matching the Request-URI. No indication is given of whether the condition is temporary or permanent." It also notes that if the server does not wish to make this information available to the client, the status code 403 (Forbidden) can be used instead. The 410 (Gone) status code SHOULD be used if the server knows, through some internally configurable mechanism, that an old resource is permanently unavailable and has no forwarding address.

The screenshot shows a Firefox browser window with the following details:

- Address Bar:** localhost:9101/dp4/ScrabbleStage/Scrabble.jsp
- Toolbar:** Oracle Technology Ne..., Applications, Admin Console, Developer Producti..., Technical Innovation, Operations
- Content Area:**
 - Header:** ORACLE
 - Title:** Zero Downtime Patching Demo - Scrabble Example - Stage Mode - Version 1
 - Subtext:** Illustrating session replication and continuous serviceability
 - Description:** This Zero Downtime Patching Demo uses a JSP to demonstrate the use of replication of a session in memory, using an OTD load balancer front end. An end-user client adds or deletes words to a session. The words are scored according to the rules of a popular board game and then displayed in the table. *Server affinity* allows WebLogic Server to retrieve the same session the next time the client visits the page.
 - Footer:** The server currently hosting this session is **new-cluster-1 (WebLogic Server 12.2.1.0.0 Tue Oct 6 10:05:47 PDT 2015 1721936)**

So you can successfully migrate the resource group from one cluster to another cluster without affecting the front end of your application.

LAB 7: CLONING A PARTITION

Overview:

This lab describes, how you can clone the existing partition, Earlier in Lab 2, we created two domain partitions dp1, dp2 for Medrec applications. The differences are both the partitions were targeted to different Virtual target and database connections and they were using different security realms. Instead of creating dp2 manually and configure it manually through WLST, Admin Console or Fusion Middleware Console. We can use the dp2 partition and we can clone it and later modify it to use different database and use different security realms.

We will use dp2 partition for cloning.

Applying Patch to domain:

We have found some bug in existing installer, so we are using an interim patch Patch.jar as a workaround. There is bug opened for it [OWLS-35927](#).

- a. In Fusion Middleware Console, Click on Weblogic Domain -> Environment -> Clusters.
- b. Check the box near app-cluster to make it highlighted, and then click on **Control -> Shutdown -> Force Shutdown Now -> Forcibly Shutdown Servers**.
- c. Go back to terminal named **base_admin**.
- d. Press CTRL+C to shutdown the Admin Server in base_domain.
- e. **export PATCH_CLASSPATH="/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab7/Patch.jar"**
- f. **./startWebLogic.sh**
- g. Once Admin Server up and running, go back to FMW Console, and Click on **WebLogic Domain -> Environment -> Clusters**.
- h. Check the box near app-cluster to make it highlighted and then click on **Control -> Start -> Start Servers**.

Exporting a domain:

- a. Go back to Firefox and type the Fusion Middleware Control Console URL:
<http://localhost:7001/em> .
- b. Enter **weblogic/welcome1** as **Username/Password** then Click on **Login**.
- c. Click on **WebLogic Domain -> Environment -> Domain Partitions**.
- d. Check the box near **dp2** to make it highlighted, and then Click on **Export**.
- e. Click on Browse and Select the **Desktop** folder from **/home/oracle** location and click on **OK**.
- f. Check the box for **“Include application bits in the zip archive”** then click **OK**.
- g. You can go to the Desktop and verify the creation of **dp2.zip** and **dp2-attributes.json** file.

Importing a domain:

- a. Click on **WebLogic Domain -> Environment -> Virtual Targets**.
- b. Click on **Create**.
- c. Enter the following and then click on Next.

Name:	VT5
Uri Prefix:	/dp5
Hosts:	localhost

ORACLE® Enterprise Manager Fusion Middleware Control 12c

base_domain [i](#)

General Targets

Create Virtual Target: General

Step 1 of 2 **Next** [Cancel](#)

Name * VT5

Uri Prefix /dp5

Hosts


Specify the host name(s) that will be used for front-end access. If you are not using Oracle Traffic Director (OTD) to load balance connections for a domain partition, specify the actual host name(s) of the WebLogic server cluster or managed server. If you are using OTD to load balance connections for a domain partition, specify the host name(s) of the OTD administration server.

View [▼](#) [+ Add](#) [X Delete](#)

Host Name
localhost

[Advanced Options](#)

- d. Select **app-cluster** as Cluster and then click on **Create**.
- e. Go back to the terminal. The below command will modify the Virtual Target name in JSON file.
- f. sed -i -e 's/VT-Medrec-2/VT5/g' /home/oracle/Desktop/dp2-attributes.json
- g. Go back to Firefox in Fusion Middleware Control Console, Click on **WebLogic Domain -> Environment -> Domain Partitions**.
- h. Click on Import, Browse to the /home/oracle/Desktop/dp2.zip and click on OK.
- i. Specify the new domain partition name dp5 in "**Override domain partition name (optional)**" and then click on Ok.

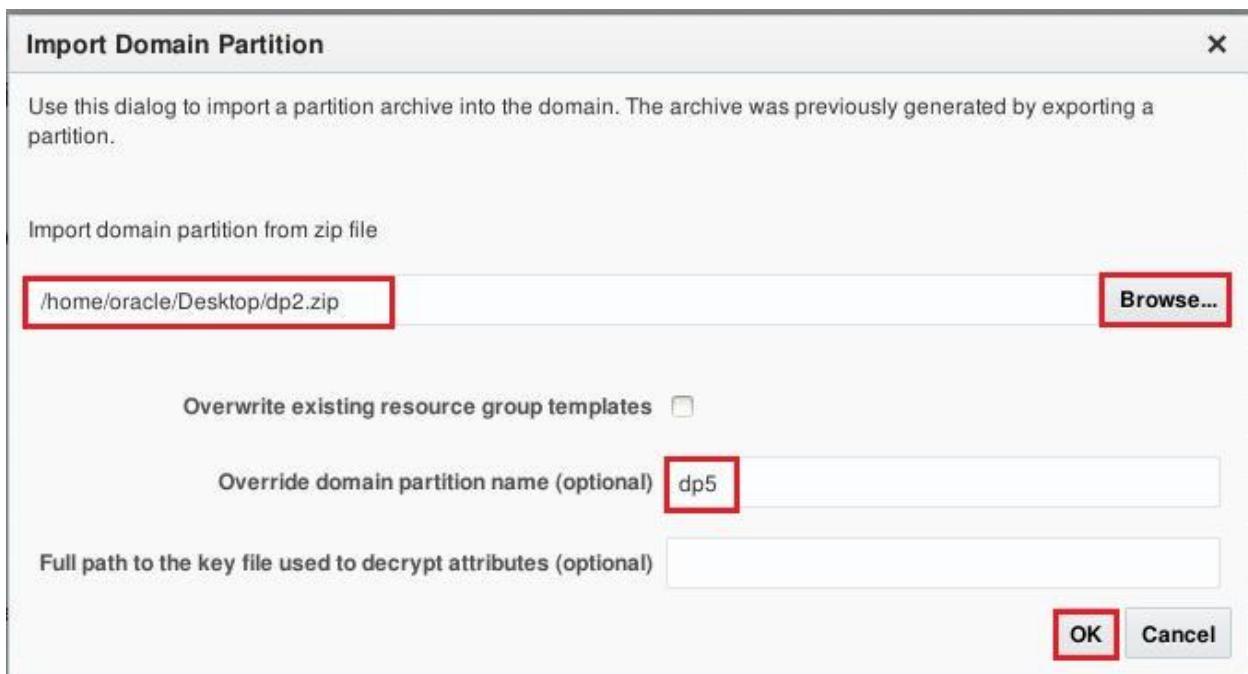

j. Click on Refresh icon.

The screenshot shows the Oracle Enterprise Manager Fusion Middleware Control 12c interface. The top navigation bar includes "WebLogic Domain" and "weblogic". The main area displays "Domain_Partitions" under "base_domain". Two pie charts are shown: one for "Status" (Up 4, Down 1) and one for "State" (Running 4, Shutdown 1). Below the charts is a table of domain partitions:

Name	Status	State	OTD Partition	Realm	Default Targets	Available Targets	Res Gro
dp2		Running			VT-Medrec-2	VT-Medrec-2	app
dp3		Running			VT-daytrader	VT-daytrader	app
dp4		Running	dp4			VT-1	app
dp5		Shutdown			VT5	VT5	app
Medrec-Dev		Running			VT-Medrec-1	VT-Medrec-1	app

At the bottom right of the table, it says "Domain Partitions 5 of 5".

- k. Check the box near **dp5** to make it highlighted, and then click on **Control -> Start**.
l. Once you see “Start Operation on target **dp5** successful” in Confirmation window, click on **Close**.

m. Verify the execution of Medrec application in dp5 at <http://localhost:7101/dp5/medrec> .

CLEANING AND RESETING

Cleaning up Environment

- a. Go back to Fusion Middleware Control <http://localhost:7001/em>
- b. Click on WebLogic Domain -> Control -> Cluster.
- c. Check the boxes near to both the cluster then click on Control -> Shutdown -> Force Shutdown now. Click on Forcibly Shutdown Servers.

Name	Cluster Type	Servers	Cluster Messaging Mode	Default Load Algorithm	Replication Type
app-cluster	Dynamic	2	Unicast	Round Robin	(None)
new-cluster	Dynamic	1	Unicast	Round Robin	(None)

- d. Press CTRL + C on Tab title with otd_admin, otd_nm, base_nm, base_admin, dev_admin, app-cluster-1.
- e. Open a new terminal.
- f. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/CleanUp/
- g. ./CleanEnvironment.sh

Appendix:

This Section is to provide you help, if you already run this workshop once, and only interested to showcase any specific features or any specific lab. We created few scripts about which the description is given below.

Lab1-2.sh: It starts the DB, and create user and populates the DB for all domain partition we need. Then it creates the base_domain, in that domain we create the machine and dynamic cluster. After that we create three domain partition dp1, dp2 and dp3. Basically after execution of this script, you will be at the end of Lab 2.

Note: After executing Lab1-2.sh, if you want to see proper metrics/state of cluster/servers you need to manually apply JRF template to cluster. You need to restart the cluster as well.

Lab3.sh: This script stops the domain partition dp1 and creates new security realm newrealm and assigns this security realm to dp1, and starts the domain partition dp1. It performs the same task what Lab 3 does.

Lab4.sh: This script creates dev_domain, it configures the Medrec application in Medrec-Dev domain partition in dev_domain, and then it removes the dp1 in base_domain. So you can login to admin console of dev_domain and export the partition and later import it in base_domain through admin console.

Lab5.sh: It sets the configuration parameter for RCM in SetDomainEnv.sh script then it restarts the cluster and also deploys heapApp.war in dp2 partition in base_domain.

Lab6.sh: This script creates otd_domain first, inside otd_domain; it creates otd_machine and OTD Configuration. Then it creates load balancer instance and starts it. Then in base_domain, it creates the Virtual target VT-1, and registers OTD Runtime, after that it creates domain partition dp4 with otd_runtime and then deploys the heapApp.war in app4RG resource group inside dp4 partition. It also creates new-cluster dynamic cluster, and starts domain partition dp4 and server in new-cluster. After running this script, you can move to resource group app4RG in dp4 in FMW console, and migrate the resource group.

Lab7_prep.sh: This script applies the patch, for this it stops the Cluster and Admin Server first, then it starts Admin Server and Cluster, and later it creates virtual target VT5. To perform Lab 7 as demo, user needs to run this script, then he needs to export partition, modify json file to include new virtual target, then he can import partition.

CleanEnvironment.sh: This script stops the servers and Node managers, removes the otd_domain, base_domain, dev_domain. It also removes the user from pluggable database, and then it stops the DB.

Appendix- Multitenancy Workshop in Cloud

This section helps you to demo the features of Multitenancy on Cloud; we have seen Lab2, Lab3, Lab4, Lab5 and Lab7 in on premise. Multitenancy Workshop as demo exactly goes parallel to Multitenancy workshop in on premise. You need to follow the below steps to perform the same.

Lab 1: CREATING DBCS/JCS INSTANCES

In this, we create the required environment. We expect the user to run command in Lab 1 as pre-requisite before he comes to workshop, as these steps are time taking.

Creation of pair of SSH Key:

- a. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop
- b. ./createSSHkeys.sh

createSShKeys.sh scripts create the pair of public and private key for you with name winsmt.pub and winsmt respectively.

Preparation of environment:

You need to modify the **environment.properties.MT** file present in **/u01/content/weblogic-innovation-seminars/cloud.demos** folder. We expect the user to modify the following parameter values:

opc.identity, **opc.username**, **opc.password** and **ssh.public.key**, he needs to copy the public key value from winsmt.pub file and put it in ssh.public.key value. You can modify the values of other parameter as well, but in order to keep things simple, modify only these four values and then you need to rename the file with new name **environment.properties**.

- a. We assume that it is your fresh oracle cloud account, and you didn't perform any operation on it, so we will start from scratch. As the steps for creating Cloud storage container, DBCS and JCS takes 15-20 minutes, you can refer the doc **WInS - Demo Guides - JCS Setup.PDF** available in **/u01/content/weblogic-innovation-seminars/cloud.demos/common/doc** folder inside the Virtual Box for more information.
- b. We need to create the Storage cloud container first.
- c. **cd /u01/content/weblogic-innovation-seminars/cloud.demos**
- d. **mvn install -DexecuteCloudUtil -Dgoal=storage-create**
- e. Verify the creation of storage container by below command.
- f. **mvn install -DexecuteCloudUtil -Dgoal=storage-list**
- g. We create the DBCS instance with name **winsdemo**.
- h. **mvn install -DexecuteCloudUtil -Dgoal=dbcs-create**
- i. Verify the creation of DBCS instance. You will also get the Public IP of the DBCS instance, which we use later, so keep it save somewhere.
- j. **mvn install -DexecuteCloudUtil -Dgoal=dbcs-get-instance-details**
- k. We create the JCS instance with name **winsdemoWLS**.
- l. **mvn install -DexecuteCloudUtil -Dgoal=jcs-create**
- m. Verify the creation of JCS instance. You will also get the Public IP of the JCS instance, which we use later, so keep it save somewhere.
- n. **mvn install -DexecuteCloudUtil -Dgoal=jcs-get-instance-details**

The above steps creates a domain **winsdemoWLS_domain** inside the JCS VM, and pluggable database **PDB1.<opc.identity>.oraclecloud.internal**. A WebLogic domain contains the cluster

winsdemoWLS_cluster with **winsdemo_adminserver** as Admin Server and **winsdemo_server_1** as managed server.

LAB 2: MULTITENANCY CONFIGURATION

- a. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab2
- b. mvn install -DLab2 -Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE

The above maven commands create users and populate the database for all the domain partitions, after that it creates three domain partitions dp1, dp2 and dp3. Basically it creates the similar environment as we have at the end of Lab 2 in workshop for on premise, but here on the cloud environment.

You can access the Medrec application running in domain partition dp1 and dp2; you can also access the day trader application running in dp3 partition.

Accessing Medrec application in dp1: <http://{PUBLIC IP OF JCS INSTANCE}/dp1/medrec>

Accessing Medrec application in dp2: <http://{PUBLIC IP OF JCS INSTANCE}/dp2/medrec>

Accessing Daytrader application in dp3: <http://{PUBLIC IP OF JCS INSTANCE}/dp3/daytrader>

LAB 3: SECURITY ISOLATION

- a. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab3
- b. mvn install -DLab3 -Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE

The above maven commands stops the domain partition dp1 and creates new security realm **newrealm** and assign this security realm to dp1, and adds the user **administrator** to new security realm with password **welcome1**, and then starts the domain partition dp1. It perform the same task, we do as part of Lab 3 of Multitenancy workshop in on premise.

LAB 4: EXPORT/IMPORT PARTITION

- a. cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4
- b. ./Lab4_cloud.sh

This Lab4_cloud.sh scripts start the Database in local Virtual box, then it creates the user and populate the database with sample data. Then it creates a dev_domain, and starts admin server in it, later we configure all the resources required for conference planner application. This is simple application which we used during Java One in 2011 for registration purpose for various events. At the end of execution of this script, you can access the application on <http://localhost:9001/dp6/ConferencePlanner/>.

- c. Open a new tab in browser, and type the URL for Admin Console for **dev_domain** <http://localhost:9001/console> .
- d. Enter **weblogic/welcome1** as **Username/Password** then click on **Login**.
- e. Click on **Domain Partitions** from left side, then check the box for **dp6** and then click on **Export**.
- f. Check the box for “**Include Application Bits**” and Enter the Path “/u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4/JCS” and then click on **OK**.
- g. Verify the creation of **dp6.zip** and **dp6-attributes.json** file in the JCS folder inside Lab4 folder.
- h. ls /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab4/JCS
- i. mvn install -DLab4 -Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE

The above maven command copies the required files to DBCS instance first, and populate the database with sample data. Here we used the SQL scripts for that, In general, you can unplug the local database, copies related files to DBCS instance and then plug the pluggable database to database in DBCS or you can export and import database. But to simply the demo, we used the SQL scripts here.

Then it copies the ZIP and JSON file to **/tmp** folder of JCS instance, and provides it sufficient permissions. It also creates the Virtual Target **VT6**, which we will use during the import partition.

- j. Open a new tab in terminal.
- k. Click on **Terminal -> Set Title**, enter “**remote**” as Title and then click on **OK**.
- l. **cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop**
- m. **ssh -i winsmt -L 7001:PUBLIC IP OF JCS INSTANCE:7001 opc@PUBLIC IP OF JCS INSTANCE**

The above ssh commands, open an ssh tunnel to remote jcs instance, and port forwarding for admin server port 7001, in that way you can run the commands in remote machine as opc user. And access the admin console running in JCS by <http://localhost:7001/console> .

- n. Go to Admin Console of JCS instance <http://localhost:7001/console> and enter **weblogic/welcome1** as **Username/Password** and then click on **Login**.
- o. Click on **Domain Partitions** and then click on **Lock & Edit**.
- p. Click on **Import**, specify the file **/tmp/dp6.zip** in **Path** and click on **OK**.
- q. Click on **Lock & Edit**, and then click on **Services -> Data Sources -> cp**.
- r. Click on the **Connection Pool** tab for **cp** datasource, and modify the URL
jdbc:oracle:thin:@localhost:1521/pdborcl with
jdbc:oracle:thin:@DBCS_INSTANCE_NAME:1521/PDB1.<opc.identity>.oraclecloud.internal and
then click on **Save**. Click on **Activate Changes**.
Where DBCS_INSTANCE_NAME should be **winsdemo**, if you did not modify it in
environment.properties file, and **opc.identity** name is your identity domain name, you specified
in environment.properties file.
- s. Click on **Domain Partitions**, go to **Control** tab, Check the box near **dp6** partition and then click
on **Start**. On Confirmation screen click on **Yes**.
- t. Click on the refresh icon, once the partition is in RUNNING state, go to the browser and access
the application [http://\[PUBLIC IP OF JCS INSTANCE\]/dp6/ConferencePlanner/](http://[PUBLIC IP OF JCS INSTANCE]/dp6/ConferencePlanner/).

Here we showed how can you lift and shift the partition running in development mode in on premise to production mode domain in Java Cloud Service.

LAB 5: RESOURCE CONSUMPTION MANAGEMENT

- a. **cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab5**
 - b. **mvn install -DLab5 -Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE**
- The above maven commands configure the parameter for RCM in **setDomainEnv.sh** script then it restart the cluster and also deploys the **heapApp.war** in **dp2** partition in **winsdemoWLS_domain**.
- c. You need to **Lock & Edit** in Fusion middleware console of **winsdemoWLS_domain**, then you need to create “**Add resource manager**” as specified in workshop or you can specify the value 200,300 and 400 respectively for **Notify**, **Slow** and **Shutdown** action for **smallHeap** and then you need **to assign it to domain partition dp2**. Make sure to activate the changes at the end.
 - d. Go back to **remote** tab, where you open **ssh tunnel** to JCS instance.
 - e. **sudo su**

- f. `tail -f /u01/data/domains/winsdemoWLS_domain/servers/winsdemo_server_1/logs/winsdemo_server_1.log |grep 'RCM'`
- g. Add the Value 100 each time, and observe the logs output, wait for 10 seconds after entering 100 every time. At the end of this lab, your partition dp2 will be shutdown. As in this case, Cluster has only one managed server, while in on premise Lab5, we have cluster with two managed server.

LAB 7: CLONNING A PARTITION

- a. `cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/Lab7`
- b. `mvn install -DLab7 -Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE`

The above maven scripts applies the patch, for this it stops the cluster and Admin Server first, add the patch jar in PATCH_CLASSPATH and then it starts Admin Server and Cluster, and later it creates Virtual target **VT5** in **winsdemoWLS_domain**.

- c. Go back to **remote** tab; enter **CTRL+C** to stop the execution of tail command.
- d. `chmod -Rf 777 /tmp`
- e. Go back to Admin Console of winsdemoWLS_domain <http://localhost:7001/console> .
- f. Enter **weblogic/welcome1** as **Username/Password** then click on **Login**.
- g. Click on **Domain Partitions**, then check the box for **dp6** and then click on **Export**.
- h. Check the box for “**Include Application Bits**” and Enter the Path “**/tmp**” and then click on **OK**.
- i. Go back to **remote** tab; modify the Virtual target name in **dp6-attributes.json** file.
- j. `sed -i 's/VT6/VT5/g' /tmp/dp6-attributes.json`
- k. The above commands, replace the string ‘VT6’ with ‘VT5’. VT5 is the virtual target name, which we use for importing the partition.
- l. Click on **Domain Partitions**, and then Click on **Import**, Enter **dp5** as domain partition name and specify the file **/tmp/dp6.zip** in **Path** and click on **OK**.
- m. In **Domain Partitions**, click on **Control** tab.
- n. Check the box for **dp5**, and click on **Start**, on confirmation screen, click on **Yes**.
- o. Click on refresh icon, once the Status for **dp5** is **RUNNING**.
- p. You can access the application on <http://{PUBLIC IP OF JCS INSTANCE}/dp5/ConferencePlanner/> .

Note: In Lab 4, we also copied the dp6.zip to /tmp folder, But here when we Export the partition dp6, it override the dp6.zip and dp6-attributes.json. That's why we don't need to change the URL for JDBC data source cp in domain partition dp5.

CLEANUP:

- a. `cd /u01/content/weblogic-innovation-seminars/WInS_Demos/MT-Workshop/CleanUp`
- b. Here we have two options for the cleanup. First case, if you execute all the labs Lab2, Lab3, Lab4, Lab5 and Lab7. Then you can reuse both the JCS instance and DBCS instance for the demo purpose. You need to perform the next step.
- c. `mvn install -DCleanUp -Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE`

- d. Second case, if you did not run any of the above lab or you runs only Lab1 and Lab4 or you configured the database for Medrec, Daytrader and Conference Planner application. You need to perform the next step. So that you can reuse the DBCS instance for the demo purpose again.
- e. **mvn install -DCleanDBCS-Djcs.ip=PUBLIC IP OF JCS INSTANCE -Ddbc.ip=PUBLIC IP OF DBCS INSTANCE**
- f. In Second case, you need to delete the JCS instance and create the JCS instance again.
- g. **cd /u01/content/weblogic-innovation-seminars/cloud.demos**
- h. **mvn install -DexecuteCloudUtil -Dgoal=jcs-delete**

The above steps take 10-15 minutes; you can confirm the status from browser through your cloud account access. Once it is deleted then executes the next command only.

- i. **mvn install -DexecuteCloudUtil -Dgoal=jcs-create**

The above steps take 15-20 minutes; you can confirm the status from browser through your cloud account access.

- j. **./CleanEnvironment.sh**

This script stops the admin server running in dev_domain and deletes the domain. It removes the user conference from database and stops the database.