User's Guide for 4ti2 version 1.6.9

A software package for algebraic, geometric and combinatorial problems on linear spaces

August 29, 2018

Contents

1	\mathbf{Beg}	ginner'	s guide	5
	1.1	Linear	r systems and their encodings	5
		1.1.1	Linear systems and integer linear systems	5
		1.1.2	Specifying a linear system in 4ti2	6
		1.1.3	What does an explicit solution to linear systems look like? $$. $$.	7
	1.2	Brief	tutorial	8
		1.2.1	Solving linear systems over $\mathbb Z$ with zsolve	8
		1.2.2	Solving linear systems over $\mathbb Q$ with qsolve	10
		1.2.3	Computing extreme rays and Hilbert bases	10
		1.2.4	Computing circuits and Graver bases	14
		1.2.5	Integer programming and toric Gröbner bases	17
		1.2.6	Markov Bases in Statistics	19
2	Adv	vanced	guide	23
	2.1	Affine	systems and their encodings	23
3	Cor	nmand	l-line reference	25
	3.1	circuit	ts	25
	3.2	genmo	odel	27
	3.3	gensy	mm	29
	3.4	graver		30

CONTENTS	0.0.	_
C/C/INTP/INTO	/ '/ \N!/ \L'\N!/ \C	1
	CONTENIS	4

	3.5	groebner	32
	3.6	hilbert	34
	3.7	markov	36
	3.8	minimize	38
	3.9	normalform	39
	3.10	output	40
	3.11	ppi	43
	3.12	qsolve	44
	3.13	rays	45
	3.14	walk	46
	3.15	zbasis	47
	3.16	zsolve	48
4	4ti2	as a callable library	51
	4.1	C API header file: 4ti2/4ti2.h	51
	4.2	Example program: zsolve	54
	4.3	Example program: qsolve	56
5	DE.	ADME. Instructions on configuring and building 4tip	59
3	RE	ADME: Instructions on configuring and building 4ti2	39
6	NEV	WS: Changes to 4ti2 since version 1.2	63
		WS: Changes to 4ti2 since version 1.2 ORS: The 4ti2 team	63 69
Al		ORS: The 4ti2 team	

Chapter 1

Beginner's guide

In this part, we use a few sample problems to introduce you to the basic functionality of 4ti2. After working through this part, you should know about *linear systems* and their encodings in 4ti2, and should be able to do computations using the following functions:

- qsolve, rays, circuits
- zsolve, hilbert, graver, ppi
- minimize, groebner, normalform
- genmodel, markov

1.1 Linear systems and their encodings

In this section you learn about the data structure linear system and how it is specified in 4ti2.

1.1.1 Linear systems and integer linear systems

In 4ti2, a linear system is defined by d constraints $Ax \sim b$ in n unknowns x, where each constraint is either \leq , = or \geq , that is $\sim \in \{\leq, =, \geq\}^d$. Moreover, one may

specify sign constraints on the variables that need to be respected in an explicit continuous/integer representation of all solutions.

There is no particular difference in 4ti2 between a linear system and an integer linear system. Currently, the user chooses between one of the two by calling the appropriate functions on the linear system.

1.1.2 Specifying a linear system in 4ti2

In order to use a linear system as input, we need to specify its parts to 4ti2. As our running example, take

$$\left(\begin{array}{ccc} 1 & 1 & 1 & 1 \\ 1 & 2 & 3 & 4 \end{array}\right) x \stackrel{\leq}{\leq} \left(\begin{array}{c} 6 \\ 10 \end{array}\right)$$

with sign constraints (1, 2, 2, 0), which we will explain below.

First, we have to give our problem a project name, say PROJECT.

- The matrix A has to be put into the file PROJECT.mat.
 - 2 4
 - 1 1 1 1
 - 1 2 3 4
- The relations \sim then have to be specified in PROJECT.rel.
 - 1 2
 - < <
- The right-hand side vector goes into PROJECT.rhs.
 - 1 2
 - 6 10
- And finally, the sign constraints end up in PROJECT.sign.
 - 1 4
 - 1 2 2 0

Note.

- The input files all have the format of a matrix, preceded by the matrix dimensions. As the dimensions already specify how many symbols have to be read, the matrix could also be given in only one line or even in many lines of different lengths.
- In 4ti2 version 1.3.1 and later, all appearing numbers have to be integers.
- Consequently, this implies that, at the moment, qsolve only supports homogeneous linear systems, that is systems with b = 0, since minimal inhomogeneous solutions could have rational components.

1.1.3 What does an explicit solution to linear systems look like?

If the system is solved over \mathbb{R} (using qsolve), 4ti2 returns two sets of integer vectors:

- a set H of support-minimal homogeneous solutions, and
- a set F defining the linear vector space the solution set lives in.

As only homogeneous linear systems are supported in this version of 4ti2, no list of minimal inhomogeneous solutions is computed. Any solution z of the linear system can now be written as

$$z = \sum \alpha_j h_j + \sum \beta_k f_k \tag{1.1}$$

with $h_j \in H$, $f_k \in F$, and $\alpha_j \geq 0$.

If the system is solved over \mathbb{Z} (using zsolve), 4ti2 returns three sets of integer vectors:

- a set H of minimal homogeneous *integer* solutions,
- a set I of minimal inhomogeneous integer solutions, and
- a set F defining the sublattice of \mathbb{Z}^n the solution set lives in.

Any solution z of the linear system can now be written as

$$z = i + \sum \alpha_j h_j + \sum \beta_k f_k \tag{1.2}$$

for some $i \in I$ and with $h_j \in H$, $f_j \in F$, and $\alpha_j \in \mathbb{Z}_+$.

Sign file. Let us finally clarify what the sign file PROJECT.sign is good for. The sign file may declare a variable to be non-negative (1), to be non-positive (-1), or to consider both cases independently and unite the answers (2). If a nonzero sign has been assigned to a variable, the explicit representations (1.1) and (1.2) above of a solution z have to respect the sign on that variable. The default setting for each variable is 0 (when using qsolve and zsolve), that is, the sign need not be respected in the explicit representation. In our example above, the first variable is declared to be non-negative, the second and the third one expand to $2 \cdot 2 = 4$ orthant constraints, and the fourth variable is unconstrained. Note, however, that 4 ti 2 does not decompose the problem internally into the four problems with sign patterns (1, 1, 1, 0), (1, 1, -1, 0), (1, -1, 1, 0), and (1, -1, -1, 0), but deals with them more efficiently at the same time.

1.2 Brief tutorial

1.2.1 Solving linear systems over \mathbb{Z} with zsolve

In this example you learn about the function zsolve.

Let us have a look at the linear system

$$\begin{array}{rcl}
x & - & y & \leq & 2 \\
-3x & + & y & \leq & 1 \\
x & + & y & \geq & 1 \\
y & \geq & 0
\end{array}$$

over \mathbb{Z} . We have to create the files encoding the linear system. Let us call our project system. Then the input files look as follows:

system.mat	system.rel	system.rhs	system.sign
3 2	1 3	1 3	1 2
1 -1	< < >	2 1 1	0 1
-3 1			
1 1			


Then we call

./zsolve system

This call creates two files

system.zinhom	system.zhom
4 2	3 2
0 1	1 1
2 0	1 2
1 0	1 3
1 1	

which correspond to the explicit description of all integer solutions:

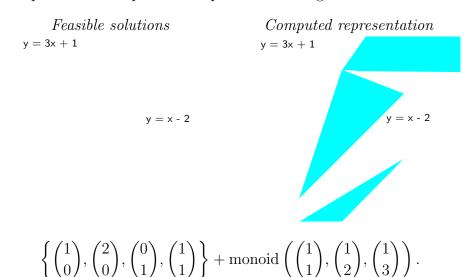

Note that in the pictures above, we are only interested in the *lattice points* inside the colored regions! The full regions are colored only for the purpose of visualizing the covering of all feasible integer solutions by finitely many shifted copies of the monoid

monoid
$$\begin{pmatrix} 1 \\ 1 \end{pmatrix}, \begin{pmatrix} 1 \\ 2 \end{pmatrix}, \begin{pmatrix} 1 \\ 3 \end{pmatrix} \end{pmatrix}$$
.

1.2.2 Solving linear systems over \mathbb{Q} with qsolve

qsolve solves linear systems over \mathbb{Q} ; however, note that it only supports homogeneous linear systems, that is, systems with b = 0.

./qsolve system

This call creates files

system.qhom	system.qfree
by bucini. quoin	by bucini. qiree

To solve an inhomogeneous system Ax = b, $x \ge 0$, you (still) need to do some work yourself:

- 1. Solve system Ax bu = 0, $x \ge 0$, $u \ge 0$ using qsolve.
- 2. Keep those solutions with u = 0. (These generate the recession cone (of unbounded directions).
- 3. Normalize those solutions with u > 0 to have u = 1 (by dividing the vector by u). Be aware that this could create rational numbers.
- 4. Drop the *u*-component.

Any solution to Ax = b, $x \ge 0$ can then be obtained by adding one solution from 3. to a nonnegative linear combination of solutions from 2.

1.2.3 Computing extreme rays and Hilbert bases

In this example you learn about the functions rays and hilbert. (They are convenient versions of qsolve and zsolve for particular cases.)

Let us consider the set of magic 3×3 squares with non-negative real entries, that is, the set of all 3×3 arrays with non-negative real entries whose row sums, column sums, and main diagonal sums all add up to the same number, the magic constant of the square.

Clearly, addition of two magic squares gives another magic square, as well as does multiplication of a magic square by a non-negative number. Therefore, we may talk about the *cone* of magic 3×3 squares. In fact, this cone is a pointed rational polyhedral cone described by the linear system

$$x_{11} + x_{12} + x_{13} = x_{21} + x_{22} + x_{23}$$

$$= x_{31} + x_{32} + x_{33}$$

$$= x_{11} + x_{21} + x_{31}$$

$$= x_{12} + x_{22} + x_{32}$$

$$= x_{13} + x_{23} + x_{33}$$

$$= x_{11} + x_{22} + x_{33}$$

$$= x_{31} + x_{22} + x_{13}$$

$$x_{ij} \ge 0, \text{ for all } i, j = 1, 2, 3.$$

Bringing all x_{ij} to the left-hand side of these equations, the matrix $A_{3\times 3}$ defining this linear system is

$$A_{3\times3} = \begin{pmatrix} 1 & 1 & 1 & -1 & -1 & -1 & 0 & 0 & 0 \\ 1 & 1 & 1 & 0 & 0 & 0 & -1 & -1 & -1 \\ 0 & 1 & 1 & -1 & 0 & 0 & -1 & 0 & 0 \\ 1 & 0 & 1 & 0 & -1 & 0 & 0 & -1 & 0 \\ 1 & 1 & 0 & 0 & 0 & -1 & 0 & 0 & -1 \\ 0 & 1 & 1 & 0 & -1 & 0 & 0 & 0 & -1 \\ 1 & 1 & 0 & 0 & -1 & 0 & -1 & 0 & 0 \end{pmatrix}.$$

Below, we will deal with the more interesting case of *integer* magic squares. For the moment, however, we wish to compute the extreme rays of the magic square cone $\{z: A_{3\times 3}z=0, z\geq 0\}.$

In order to call the function rays, we only have to create one file, say magic3x3.mat, in which we specify the problem matrix $A_{3\times3}$. The remaining data is set by default to

"equations only", to "homogeneous system", and to "all variables are non-negative". Note that we are allowed to change these defaults (except homogeneity) by specifying data in magic3x3.rel and magic3x3.sign

magic3x3.mat											
7	9										
1	1	1	-1	-1	-1	0	0	0			
1	1	1	0	0	0	-1	-1	-1			
0	1	1	-1	0	0	-1	0	0			
1	0	1	0	-1	0	0	-1	0			
1	1	0	0	0	-1	0	0	-1			
0	1	1	0	-1	0	0	0	-1			
1	1	0	0	-1	0	-1	0	0			

Now we call

./rays magic3x3

which creates the single file

magic3x3.ray										
4	9									
0	2	1	2	1	0	1	0	2		
1	2	0	0	1	2	2	0	1		
2	0	1	0	1	2	1	2	0		
1	0	2	2	1	0	0	2	1		

that corresponds to the four extremal rays of the 3×3 magic square cone:

0	2	1	1	2	0	2	0	1	1	0	2
2	1	0	0	1	2	0	1	2	2	1	0
1	0	2	2	0	1	1	2	0	0	2	1

Every magic 3×3 square is a non-negative linear combination of these four magic squares.

If we turn now to *integer* magic squares, we are looking for a Hilbert basis of the 3×3 magic square cone. As the default settings for hilbert are the same as for rays, we can use the same input file

mag	ic3:	x3.1	mat						
7	9								
1	1	1	-1	-1	-1	0	0	0	
1	1	1	0	0	0	-1	-1	-1	
0	1	1	-1	0	0	-1	0	0	
1	0	1	0	-1	0	0	-1	0	
1	1	0	0	0	-1	0	0	-1	
0	1	1	0	-1	0	0	0	-1	
1	1	0	0	-1	0	-1	0	0	

for this computation. However, to compute the Hilbert basis, we call

./hilbert magic3x3

which creates the single output file

magic3x3.hil										
5	9									
0	2	1	2	1	0	1	0	2		
1	2	0	0	1	2	2	0	1		
2	0	1	0	1	2	1	2	0		
1	0	2	2	1	0	0	2	1		
1	1	1	1	1	1	1	1	1		

that corresponds to the five elements in the minimal Hilbert basis of the 3×3 magic square cone:

0	2	1
2	1	0
1	0	2

1	2	0
0	1	2
2	0	1

2	0	1
0	1	2
1	2	0

1	0	2
2	1	0
0	2	1

1	1	1
1	1	1
1	1	1

Every integer magic 3×3 square is a non-negative *integer* linear combination of these five integer magic squares. Note that the all-1 square is in the interior of the magic square cone.

See [?, section 3.8] or [?] for details on the algorithm implemented.

1.2.4 Computing circuits and Graver bases

In this example you learn about the functions graver, ppi, and circuits.

As an example of a Graver basis computation, let us compute the primitive partition identities of order n = 4. Before we do the simple computation, let us explain what a primitive partition identity is.

A partition identity is any identity of the form

$$a_1 + \ldots + a_k = b_1 + \ldots + b_l$$

with (generally not distinct) integer numbers $0 < a_i, b_j \le n$. A partition identity is called **primitive** if no proper subidentity exists.

For example,

$$1+2+3=2+2+2$$

is a partition identity which is not primitive, since it contains the subidentity

$$1 + 3 = 2 + 2$$

which is in fact primitive.

The description of the primitive partition identities for fixed n, however, is exactly the description of the Graver basis of the matrix

$$A_n = \left(\begin{array}{ccccc} 1 & 2 & 3 & \dots & n \end{array} \right).$$

Let us finally do the computation for n = 3. We create an input file ppi3 for 4ti2 which looks as follows:

ppi3.mat						
1	3					
1	2	3				

and call

This call will create an output file ppi3.gra that looks like:

ppi3.gra					
5	3				
3	0	-1			
2	-1	0			
0	3	-2			
1	1	-1			
1	-2	1			

Thus, there are 5 primitive partition identities of order n = 3:

$$1+1+1 = 3$$

$$1+1 = 2$$

$$2+2+2 = 3+3$$

$$1+2 = 3$$

$$1+3 = 2+2$$

You may try and compute the primitive partition identities for bigger n, say n = 17, 20, or 23. Be aware, especially the latter two problems take a long, long time. What is the biggest n for which you can compute the primitive partition identities of order n on your machine within one hour?

Due to the very special structure of the matrix, there are algorithmic speed-ups [?, ?, ?]. The currently fastest algorithm to compute primitive partition identities is implemented in the function ppi of 4ti2. Try running

which creates two files ppi17.mat (so we do not really have to create this file ourselves) and the file ppi17.gra containing the desired identities. Compare this running time with the time taken by

./graver ppi17

Do you notice the speed-up?

Let us now turn to the question of determining the support-minimal partition identities. This, in fact, is the question of computing the circuits of the matrix

$$A_n = \left(\begin{array}{cccc} 1 & 2 & 3 & \dots & n \end{array} \right).$$

We use the same input file

ppi3.mat				
1	3			
1	2 3			

as above and call

./circuits ppi3

This call will create an output file ppi3.cir that looks like:

ppi3	.cir		
3	3		
3	0	-1	
2	-1	0	
0	3	-2	

Thus, there are 3 support-minimal partition identities of order n=3:

$$1+1+1 = 3$$

 $1+1 = 2$
 $2+2+2 = 3+3$

Note that support-minimal partition identities are primitive, since the circuits of a matrix are contained in the Graver basis of this matrix.

See the book [?, section 3.8], or Hemmecke [?] for details on the algorithm implemented.

1.2.5 Integer programming and toric Gröbner bases

In this example you learn about the functions minimize, groebner, and normalform.

The following neat example is based on the example presented in [?]. Let us assume that we want to give change worth 99 cents using only pennies (1ct), nickels (5ct), dimes (10ct), and quarters (25ct). Clearly,

$$4 \cdot 1 + 4 \cdot 5 + 0 \cdot 10 + 3 \cdot 25 = 99$$

would be one way to do it. Is this there another choice of 11 coins that sums up to 99ct but uses fewer nickels and quarters (in total)? In other words, we would like to solve

$$\min\{x_2 + x_4 : x_1 + x_2 + x_3 + x_4 = 11, x_1 + 5x_2 + 10x_3 + 25x_4 = 99, x_1, x_2, x_3, x_4 \in \mathbb{Z}_+\}$$

Let us set up the problem in 4ti2.

4coins.mat	4coins.zsol	4coins.sign	4coins.cost
2 4	1 4	1 4	1 4
1 1 1 1	4 4 0 3	1 1 1 1	0 1 0 1
1 5 10 25			

Note that we do not have to specify a relations file 4coins.rel, since already by default all relations are assumed to be equations. Now we simply call

which creates the single output file

4coins.min					
1	4				
4	1	4	2		

From this, we conclude that

$$4 \cdot 1 + 1 \cdot 5 + 4 \cdot 10 + 2 \cdot 25 = 99$$

is an optimal choice, using only 3 instead of 7 nickels and quarters.

Remark. Earlier versions of 4ti2 allowed to specify the right-hand side vector in a file called 4coins.rhs, instead of giving a solution in 4coins.zsol. This is no longer supported.

Since we already know a feasible solution, there is another way we might attack this problem, namely via toric Gröbner bases. (See [?, Chapter 11] for an introduction to toric ideals and their Gröbner bases, and also their generalizations, lattice ideals.) For this, we first need to specify the matrix A and the cost vector c in the two files a 4coins.mat and a 4coins.cost:

4coins.mat		4coins.cost							
2	4				1	4			
1	1	1	1		0	1	0	1	
1	5	10	25						

Then we compute the Gröbner basis of the toric ideal

$$I_A = \langle x^u - x^v : Au = Av, u, v \in \mathbb{Z}_+^4 \rangle$$

with respect to a term ordering \prec compatible with c, that is, $c^{\mathsf{T}}v < c^{\mathsf{T}}u$ implies $x^v \prec x^u$. This toric Gröbner basis is computed by

./groebner 4coins

and gives the output file

4coins.gro

Remark. Many algorithm options are available and can be selected by command-line options of groebner, see section 3.5. As reference to the algorithms we recommend the book [?, section 11.4] or Hemmecke and Malkin [?], as well as Bigatti, LaScala, and Robbiano [?], Gebauer and Möller [?], and Hoşten and Sturmfels [?]. Since runnning times of the various algorithms are hard to predict, it may for some hard problems make sense to start several computations in parallel, each with different algorithms.

Then we specify our feasible solution in

4coins.feas					
1	4				
4	4	0	3		

and call

./normalform 4coins

to produce the file

4coins.nf					
1	4				
4	1	4	2		

that also contains the desired optimal solution.

Remark. We could also specify a list of feasible solutions in 4coins.feas. Then the call

./normalform 4coins

creates a file 4coins.nf containing the minima to the corresponding integer programs. (If z_0 is a feasible solution, the corresponding integer program is defined by putting the right-hand side to Az_0 .)

1.2.6 Markov Bases in Statistics

In this example you learn about the functions markov and genmodel.

Let us consider the following 4×4 table of non-negative integer numbers together with all row and column sums.

$$\begin{pmatrix} 11 & 23 & 34 & 3 \\ 4 & 15 & 12 & 11 \\ 17 & 2 & 3 & 25 \\ 16 & 12 & 22 & 7 \end{pmatrix} \quad \begin{array}{c} 71 \\ 42 \\ 47 \\ 57 \\ 48 & 52 & 71 & 46 \\ \end{array}$$

In statistics, one wishes to sample among arrays that have fixed counts, say fixed row and column sums. In order to sample, one needs a set of moves that, in particular, do not change the counts when added to the current table. Clearly, these moves must have counts 0 and thus quite naturally lead us to the toric ideal

$$I_A = \langle x^u - x^v : Au = Av, u, v \in \mathbb{Z}^{16}_+ \rangle,$$

where

It turns out that for any set of fixed counts, a (minimal) Markov basis is given by a minimal generating set of this toric ideal. Note that a Markov basis connects all non-negative tables with these counts in the sense that for any two non-negative tables T_1 and T_2 with these counts, there is a sequence of non-negative tables $T_1 = S_0, \ldots, S_N = T_2$ with the same counts as T_1 and T_2 and such that $S_i - S_{i-1}$ or $S_{i-1} - S_i$ is in the Markov basis for $i = 1, \ldots, N$.

For two-way tables the situation is still very simple as our computations with 4×4 tables will now demonstrate. Write the matrix that defines our toric ideal in the file 4x4.mat:

4x4.	mat														
8	16														
1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	1	1	1	1	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	1	1	1	1	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1
1	0	0	0	1	0	0	0	1	0	0	0	1	0	0	0
0	1	0	0	0	1	0	0	0	1	0	0	0	1	0	0
0	0	1	0	0	0	1	0	0	0	1	0	0	0	1	0
0	0	0	1	0	0	0	1	0	0	0	1	0	0	0	1

Let us compute the Markov basis via the call

./markov 4x4

which creates a single output file 4x4.mar containing the 36 Markov basis elements. Up to symmetry (swapping rows or columns), the Markov basis consists of the single move

$$\left(\begin{array}{cccc}
1 & -1 & 0 & 0 \\
-1 & 1 & 0 & 0 \\
0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0
\end{array}\right).$$

In fact, this elementary move is (up to symmetry) the only representative of the minimal Markov moves for arbitrary $m \times n$ tables using row and column counts.

Creating the matrices for statistical models may be pretty cumbersome. 4ti2 provides a little function, genmodel, that helps the user with creating matrices for hierarchical models defined by a complex.

The $m \times n$ tables problem above corresponds to the complex $\{\{1\}, \{2\}\}\}$ on two nodes with levels m and n, respectively. Let us encode the complex for 3×6 tables with 1-marginals (row and column sums) in 3x6.mod.

3x6.	mod	
3		
3	6	
2		
1	1	
1	2	

and call

./genmodel 3x6

to produce the desired matrix file 3x6.mat.

The encoding of the complex should be obvious from the example: first we state the number of nodes and their levels, then we give the number of maximal faces. Finally,

we list each maximal face by first specifying the number of nodes on it and then by listing these nodes.

Thus, a $3 \times 4 \times 6$ table with 2-marginals (that is, again only counts along coordinate axes) corresponds to the complex $\{\{(1,2)\}, \{(2,3)\}, \{(3,1)\}\}$ on 3 nodes with levels 3, 4, and 6, respectively. Thus, its encoding is in 4ti2 would look like:

3x4x6.mod				
3				
3	4	6		
3				
2	1	2		
2	2	3		
2	3	1		

A binary model on the bipartite graph $K_{2,3}$ then reads as

k2_3.mod					
5					
2	2	2	2	2	
6					
2	1	3			
2	1	4			
2	1	5			
2	2	3			
2	2	4			
2	2	5			

Chapter 2

Advanced guide

In this part, we deal with several more advanced problem specifications in 4ti2.

First we introduce *affine systems* and their encodings. In fact, affine systems are the basic objects used in 4ti2, since every linear system is transformed into an affine system. However, in the integer situation, it is not always possible to transform an affine system back into a linear system without adding variables or modulo constraints.

2.1 Affine systems and their encodings

Let $a + \mathcal{L}_{\mathbb{Z}}$ be an "integer linear affine space" given by the vector $a \in \mathbb{Z}^n$ and by generators for the lattice $\mathcal{L}_{\mathbb{Z}} \subseteq \mathbb{Z}^n$. We wish to find a finite sign-compatible description for the set of all (integer) vectors $x \in a + \mathcal{L}_{\mathbb{Z}}$.

As an example, let consider the linear space $\mathcal{L}_{\mathbb{R}}$ and the lattice $\mathcal{L}_{\mathbb{Z}}$ both spanned by the two vectors (1, -2, 1, 0) and (2, -3, -0, 1). Moreover, consider the sign-constraints (1, 2, 2, 0). Thus, we are looking for a finite explicit sign-compatible description for all x that can be written as

$$x = \begin{pmatrix} 1 & 2 \\ -2 & -3 \\ 1 & 0 \\ 0 & 1 \end{pmatrix} \lambda,$$

with $\lambda \in \mathbb{R}^2$ and $\lambda \in \mathbb{Z}^2$, respectively.

In order to solve this affine system using zsolve, we create the following input files to encode the affine system:

affine.lat	affine.sign
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	1 4 1 2 2 0

and then call

./zsolve affine

This creates the files affine.zhom and affine.zinhom.

Chapter 3

Command-line reference

3.1 circuits

Usage: circuits [options] PROJECT

Computes the circuits of a cone.

Input Files:

PROJECT.mat A matrix (compulsory).

PROJECT.sign The sign constraints of the variables ('1' means

non-negative, '0' means a free variable, and '2' means

both non-negative and non-positive).

It is optional, and the default is both.

PROJECT.rel The relations on the matrix rows ('<','>','=').

It is optional and the default is all '='.

The mat must be given with this file.

Output Files:

PROJECT.cir The circuits of the cone.

PROJECT.qfree A basis for the linear subspace of the cone.

If this file does not exist then the linear subspace

is trivial.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

3.1. circuits 26

PREC is one of the following: '64' (default), '32', and 'arbitrary' (only 'arb' is needed). Use the Matrix algorithm (default for 32 and 64). -m, --mat Use the Support algorithm (default for arbitrary). -s, --support -o, --order=ORDERING Set ORDERING as the ordering in which the columns are chosen. The possible orderings are 'maxinter', 'minindex', 'maxcutoff' (default), and 'mincutoff'. Set the frequency of output (default is 1000). -f, --output-freq=n -q, --quiet Do not output anything to the screen. -h, --help Display this help and exit.

usage: genmodel [--options] FILENAME

3.2 genmodel

```
Computes the problem matrix corresponding to graphical statistical models
given by a simplicial complex and levels on the nodes.
Options:
-q, --quiet No output is written to the screen
Input file:
FILENAME.mod
          Simplicial complex and levels on the nodes
Output file:
FILENAME.mat
          Matrix file
Example: Consider the problem of 3x3x3 tables with 2-marginals. These
are given by K_3 as the simplicial complex on 3 nodes and with levels
of 3 on each node. In '333.mod' write:
3
3 3 3
3
2 1 2
2 2 3
2 3 1
Calling 'genmodel 333' produces the following file '333.mat':
27 27
0 1 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 1 0 0 0 0 0
[...]
[...]
```

3.2. genmodel 28

[...]

3.3 gensymm

usage: gensymm [--options] A B C D FILENAME

Computes the generators for the symmetry group acting on 4-way tables with 3-marginals. By putting one side length to 1, this includes 3-way tables with 2-marginals.

Options:

-q, --quiet No output is written to the screen

Output file:

FILENAME.sym generators for the symmetry group

Example: Consider the problem of 3x3x3 tables with 2-marginals. Calling gensymm 3 3 3 1 333 produces the file '333.sym' containing the following lines.

9 27

10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 1 2 3 4 5 6 7 8 9 19 20 21 22 23 24 25 26 27 4 5 6 7 8 9 1 2 3 13 14 15 16 17 18 10 11 12 22 23 24 25 26 27 19 20 21 4 5 6 1 2 3 7 8 9 13 14 15 10 11 12 16 17 18 22 23 24 19 20 21 25 26 27 2 3 1 5 6 4 8 9 7 11 12 10 14 15 13 17 18 16 20 21 19 23 24 22 26 27 25 2 1 3 5 4 6 8 7 9 11 10 12 14 13 15 17 16 18 20 19 21 23 22 24 26 25 27 1 2 3 10 11 12 19 20 21 4 5 6 13 14 15 22 23 24 7 8 9 16 17 18 25 26 27 1 10 19 4 13 22 7 16 25 2 11 20 5 14 23 8 17 26 3 12 21 6 15 24 9 18 27 1 4 7 2 5 8 3 6 9 10 13 16 11 14 17 12 15 18 19 22 25 20 23 26 21 24 27

3.4. graver 30

3.4 graver

Usage: graver [options] PROJECT

Computes the Graver basis of a matrix or a given lattice.

```
Basic options:
```

```
-p PREC, --precision=PREC Use precision (32, 64, gmp). Default is 32 bit
-m, --maxnorm Write vectors with maximum norm to PROJECT.maxnorm
-b [FREQ], --backup[=FREQ] Frequently backup status to PROJECT.backup
-r, --resume Resume from backup file PROJECT.backup
-h, --help Display this help
--version Display version information
```

Output options:

```
-q, --quiet Quiet mode
-u, --update[=1] Updated output on console (default)
-uu, --update=2 More verbose updated output on console
-v, --verbose[=1] Output once every variable computation
-vv, --verbose=2 Output once every norm sum computation
-vvv, --verbose=3 Output once every norm computation
```

Logging options:

```
-n, --log=0 Disable logging (default)
-1, --log[=1] Log once every variable computation to PROJECT.log
-11, --log=2 Log once every norm sum computation to PROJECT.log
-111, --log=3 Log once every norm computation to PROJECT.log
```

Input files:

PROJECT.mat Matrix

PROJECT.lat Lattice basis (can be provided instead of matrix)

PROJECT.sign Sign of columns (optional)

PROJECT.lb Lower bounds of columns (optional)

PROJECT.ub Upper bounds of columns (optional)

Backup files:

PROJECT.backup Backup file

PROJECT.backup~ Temporary backup file

(if it exists, it may be newer than PROJECT.backup)

Output files:

PROJECT.gra Graver basis

PROJECT.zfree Free part of the solution

 ${\tt PROJECT.maxnorm\ Vectors\ with\ maximum\ norm\ (if\ -m,\ --maxnorm\ is\ in\ use)}$

3.5. groebner 32

3.5 groebner

Usage: groebner [options] PROJECT

Computes a Groebner basis of the toric ideal of a matrix, or, more general, of the lattice ideal of a lattice.

Input Files:

PROJECT.mat A matrix (optional if lattice basis is given).

PROJECT.lat A lattice basis (optional if matrix is given).

PROJECT.cost The cost matrix, which determines the term ordering

(optional, default is degrevlex). Ties are broken with degrevlex.

PROJECT.sign The sign constraints of the variables ('1' means

non-negative and '0' means a free variable).

It is optional, and the default is all non-negative.

PROJECT.mar The Markov basis/generating set of the lattice (optional).

PROJECT.weights The weight vectors used for truncation (optional).

PROJECT.weights.max The maximum weights used for truncation.

This file is needed when PROJECT.weights exists.

PROJECT.zsol An integer solution to specify a fiber (optional).

The integer solution is used for truncation.

Output Files:

PROJECT.gro The Groebner basis of the lattice.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

PREC is one of the following: '64' (default), '32', and 'arbitrary' (only 'arb' is needed).

-a, --algorithm=ALG Select ALG as the completion procedure for

computing Groebner bases. ALG is one of

'fifo', 'weighted', or 'unbounded.'

-g, --generation=ALG Select ALG as the procedure for computing

a generating set or Markov basis. ALG is

one of 'hybrid' (default), 'project-and-lift',

'max-min', or 'saturation'.

-t,truncation=TRUNC	Set TRUNC as the truncation method. TRUNC is
	of the following: 'ip', 'lp', 'weight' (default),
	or 'none'. Only relevant if 'zsol' is given.
-m,minimal=STATE	If STATE is 'yes' (default), then 4ti2 will
	compute a minimal Markov basis. If STATE is
	'no', then the Markov basis will not
	necessarily be minimal.
-r,auto-reduce-freq=n	Set the frequency of auto reduction.
	(default is 2500).
-f,output-freq=n	Set the frequency of output (default is 1000).
-q,quiet	Do not output anything to the screen.
-h,help	Display this help and exit.

3.6. hilbert 34

3.6 hilbert

Usage: hilbert [options] PROJECT

Computes the Hilbert basis of a matrix or a given lattice.

```
Basic options:
```

```
-p PREC, --precision=PREC Use precision (32, 64, gmp). Default is 32 bit
-m, --maxnorm Write vectors with maximum norm to PROJECT.maxnorm
-b [FREQ], --backup[=FREQ] Frequently backup status to PROJECT.backup
-r, --resume Resume from backup file PROJECT.backup
-h, --help Display this help
--version Display version information
```

Output options:

```
-q, --quiet Quiet mode
-u, --update[=1] Updated output on console (default)
-uu, --update=2 More verbose updated output on console
-v, --verbose[=1] Output once every variable computation
-vv, --verbose=2 Output once every norm sum computation
-vvv, --verbose=3 Output once every norm computation
```

Logging options:

```
-n, --log=0 Disable logging (default)
-1, --log[=1] Log once every variable computation to PROJECT.log
-11, --log=2 Log once every norm sum computation to PROJECT.log
-111, --log=3 Log once every norm computation to PROJECT.log
```

Input files:

```
PROJECT.mat Matrix

PROJECT.lat Lattice basis (can be provided instead of matrix)

PROJECT.rel Relations (<, >, =)

PROJECT.sign Sign of columns (optional)

PROJECT.ub Upper bounds of columns (optional)
```

Backup files:

PROJECT.backup Backup file

PROJECT.backup~ Temporary backup file

(if it exists, it may be newer than PROJECT.backup)

Output files:

PROJECT.hil Hilbert basis

PROJECT.zfree Free part of the solution

 ${\tt PROJECT.maxnorm\ Vectors\ with\ maximum\ norm\ (if\ -m,\ --maxnorm\ is\ in\ use)}$

3.7. markov 36

3.7 markov

Usage: markov [options] PROJECT

Computes a Markov basis (generating set) of the toric ideal of a matrix or, more general, of the lattice ideal of a lattice.

Input Files:

PROJECT. A matrix (optional only if lattice basis is given).

PROJECT.lat A lattice basis (optional only if matrix is given).

PROJECT.sign The sign constraints of the variables ('1' means non-negative and '0' means a free variable).

It is optional, and the default is all non-negative.

PROJECT.weights The weight vectors used for truncation (optional).

PROJECT.weights.max The maximum weights used for truncation.

This file is needed when PROJECT.weights exists.

PROJECT.zsol An integer solution to specify a fiber (optional).

The integer solution is used for truncation.

Output Files:

PROJECT.mar The Markov basis/generating set of the lattice.

Options:

PCTO	15.	
-p,	precision=PREC	Select PREC as the integer arithmetic precision.
		PREC is one of the following: '64' (default),
		'32', and 'arbitrary' (only 'arb' is needed).
-a,	algorithm=ALG	Select ALG as the completion procedure for
		computing Groebner bases. ALG is one of
		'fifo', 'weighted', or 'unbounded.'
-g,	generation=ALG	Select ALG as the procedure for computing
		a generating set or Markov basis. ALG is
		one of 'hybrid' (default), 'project-and-lift',
		'max-min', or 'saturation'.
-t,	truncation=TRUNC	Set TRUNC as the truncation method. TRUNC is
		of the following: 'ip', 'lp', 'weight' (default),
		or 'none'. Only relevant if 'zsol' is given.
-m,	minimal=STATE	If STATE is 'yes' (default), then 4ti2 will

compute a minimal Markov basis. If STATE is

'no', then the Markov basis will not

necessarily be minimal.

-r, --auto-reduce-freq=n Set the frequency of auto reduction.

(default is 2500).

-f, --output-freq=n Set the frequency of output (default is 1000).

-q, --quiet Do not output anything to the screen.

3.8. minimize 38

3.8 minimize

Usage: minimize [options] PROJECT

Computes the minimal solution of an integer linear program or, more general, a lattice program, using a Groebner basis.

Input Files:

PROJECT.mat	A matrix (optional only if lattice basis is given).
PROJECT.lat	A lattice basis (optional only if matrix is given).
PROJECT.cost	The cost vector. Exactly one vector allowed.
PROJECT.zsol	An integer solution to specify a fiber (needed).
PROJECT.sign	The sign constraints of the variables ('1' means
	non-negative and '0' means a free variable).
	It is optional, and the default is all non-negative.

Output Files:

PROJECT.min The minimal solution for the given fiber.

Options:

-p,precision=PREC	Select PREC as the integer arithmetic precision.
	PREC is one of the following: '64' (default),
	'32', and 'arbitrary' (only 'arb' is needed).
-a,algorithm=ALG	Select ALG as the completion procedure for
	computing Groebner bases. ALG is one of
	'fifo', 'weighted', or 'unbounded.'
-t,truncation=TRUNC	Set TRUNC as the truncation method. TRUNC is
	of the following: 'ip', 'lp', 'weight' (default),
	or 'none'. Only relevant if 'zsol' is given.
-r,auto-reduce-freq=n	Set the frequency of auto reduction.
	(default is 2500).
-f,output-freq=n	Set the frequency of output (default is 1000).
-q,quiet	Do not output anything to the screen.
-h,help	Display this help and exit.

3.9 normalform

Usage: normalform [options] PROJECT

Computes the normal form of a list of feasible points.

Input Files:

PROJECT.mat A matrix (optional if lattice basis is given).

PROJECT.lat A lattice basis (optional if matrix is given).

PROJECT.gro The Groebner basis of the lattice (needed).

PROJECT.cost The cost matrix (optional, default is degrevlex).

Ties are broken with degrevlex.

PROJECT.feas An list of integer feasible solutions (needed).
PROJECT.sign The sign constraints of the variables ('1' means

non-negative and '0' means a free variable).

It is optional, and the default is all non-negative.

Output Files:

PROJECT.nf The normal forms of the feasible solutions.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

PREC is one of the following: '64' (default), '32', and 'arbitrary' (only 'arb' is needed).

-q, --quiet Do not output anything to the screen.

3.10. output 40

3.10 output

usage: output [--options] FILENAME.EXT

Transforms a 4ti2 matrix file to something else.

General options:

--quiet No output is written to the screen.

Options that control what to output: their output files:
--binomials Write vectors as binomials. FILENAME.EXT.bin

Use an optional input file

'FILENAME.EXT.vars'

to specify variable names.

--maple Write vectors as Maple list. FILENAME.EXT.maple

This format is suitable also for CoCoA, Mathematica, Macaulay2.

--0-1 Extract vectors with 0-1

components only. FILENAME.EXT.O-1

--transpose Transpose matrix and write it FILENAME.EXT.tra

in 4ti2 format.

--degree Print 1-norms of all vectors.

--degree N Extract all vectors of 1-norm FILENAME.EXT.deg.N

equal to N.

--degree N1 N2 Extract all vectors of 1-norm FILENAME.EXT.deg.N1-N2

between N1 and N2 (inclusive).

--support Print supports of all vectors.

--support S Extract all vectors of support FILENAME.EXT.supp.S

size equal to S.

--support S1 S2 Extract all vectors of support FILENAME.EXT.supp.S1-S2 size between S1 and S2 (incl.)

--positive Extract positive parts of vectors. FILENAME.EXT.pos

Corresponds to leading terms of

binomials.

--3way A B C Write vectors as 3-way tables FILENAME.EXT.3way of size A \times B \times C.

--nonzero-at K Extract all vectors that have FILENAME.EXT.nonzero.K nonzero K-th coordinate.

Undocumented or obscure options for experts:

--representatives

--dominated Extract all non-dominated vectors FILENAME.EXT.nondom
--maximal-non-dominated FILENAME.EXT.maxnondom

--expand-representatives-to-full-orbits

--type T

--AxB Computes a matrix-vector product.

--macaulay2

--mathematica

--cocoa

--sum Print the sum of the columns.

--submatrix LISTFILENAME FILENAME.EXT.submat
--remove-column I FILENAME.EXT.remcol
--remcol I FILENAME.EXT.remcol

--stabilizer SYMMFILENAME FILENAME.EXT.stab
--fill-column FILENAME.EXT.fil

--add-column FILENAME.EXT.addcol
--fix I1 ... IK Extract fixed vectors, FILENAME.EXT.fix

that is, those vectors that have x[i]=i for the given i.

--fox I1 ... IK Extract relaxed fixed vectors. FILENAME.EXT.fox

3.10. output 42

--initial-forms Extract initial forms.

FILENAME.ini (Call with FILENAME rather FILENAME.ini.bin

than FILENAME.EXT. Reads

FILENAME.gro and

optionally FILENAME.cost and

FILENAME.vars.

Examples:

'output --binomials file.gra' writes the Graver basis elements as binomials in 'file.gra.bin'.

'output --0-1 foo.gra' extracts the 0-1 elements from the Graver basis elements and writes them into 'foo.gra.0-1'.

3.11 ppi

usage: ppi [--binary-output] N

Computes the primitive partition identities, that is, the Graver basis of [1 2 3 \dots N].

Options:

-b, --binary-output

Create a binary file ppiN.dat instead of text file ppiN.gra

3.12. qsolve 44

3.12 qsolve

Usage: qsolve [options] PROJECT

Computes a generator description of a cone.

Input Files:

PROJECT.mat A matrix (compulsory).

PROJECT.sign The sign constraints of the variables ('1' means

non-negative, '0' means a free variable, and '2' means

both non-negative and non-positive).

It is optional, and the default is all free.

PROJECT.rel The relations on the matrix rows ('<','>','=').

It is optional and the default is all '='.

The mat must be given with this file.

Output Files:

PROJECT.qhom The homogeneous generators of the linear system.

PROJECT.qfree A basis for the linear subspace of the cone.

If this file does not exist then the linear subspace

is trivial.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

PREC is one of the following: '64' (default),

'32', and 'arbitrary' (only 'arb' is needed).

-m, --mat Use the Matrix algorithm (default for 32 and 64).

-s, --support Use the Support algorithm (default for arbitrary).

-o, --order=ORDERING Set ORDERING as the ordering in which the columns

are chosen. The possible orderings are 'maxinter',

'minindex', 'maxcutoff' (default), and 'mincutoff'.

-f, --output-freq=n Set the frequency of output (default is 1000).

-q, --quiet Do not output anything to the screen.

3.13 rays

Usage: rays [options] PROJECT

Computes the extreme rays of a cone.

Input Files:

PROJECT.mat A matrix (compulsory).

PROJECT.sign The sign constraints of the variables ('1' means

non-negative, '0' means a free variable, and '2' means

both non-negative and non-positive).

It is optional, and the default is all non-negative.

PROJECT.rel The relations on the matrix rows ('<','>','=').

It is optional and the default is all '='.

The mat must be given with this file.

Output Files:

PROJECT.ray The extreme rays of the cone.

PROJECT.qfree A basis for the linear subspace of the cone.

If this file does not exist then the linear subspace

is trivial.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

PREC is one of the following: '64' (default), '32', and 'arbitrary' (only 'arb' is needed).

-m, --mat Use the Matrix algorithm (default for 32 and 64).

-s, --support Use the Support algorithm (default for arbitrary).

-o, --order=ORDERING Set ORDERING as the ordering in which the columns

are chosen. The possible orderings are 'maxinter',

'minindex', 'maxcutoff' (default), and 'mincutoff'.

-f, --output-freq=n Set the frequency of output (default is 1000).

-q, --quiet Do not output anything to the screen.

3.14. walk 46

3.14 walk

Usage: walk [options] PROJECT

Computes the minimal solution of an integer linear program or, more general, a lattice program using a Groebner basis.

Input Files:

PROJECT.mat A matrix (optional only if lattice basis is given).
PROJECT.lat A lattice basis (optional only if matrix is given).

PROJECT.gro.start The starting Groebner basis (needed).

PROJECT.gro.cost The starting cost vector (optional, default is degrevlex).

Ties are broken with degrevlex.

PROJECT.cost The target cost vector (optional, default is degrevlex).

Ties are broken with degrevlex.

PROJECT.zsol An integer solution to specify a fiber (needed).

PROJECT.sign The sign constraints of the variables ('1' means

non-negative and '0' means a free variable).

It is optional, and the default is all non-negative.

Output Files:

PROJECT.gro The Groebner basis of the lattice.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

PREC is one of the following: '64' (default),

'32', and 'arbitrary' (only 'arb' is needed).

-t, --truncation=TRUNC Set TRUNC as the truncation method. TRUNC is

of the following: 'ip', 'lp', 'weight' (default),

or 'none'. Only relevant if 'zsol' is given.

-f, --output-freq=n Set the frequency of output (default is 1000).

-q, --quiet Do not output anything to the screen.

3.15 zbasis

Usage: zbasis [options] PROJECT

Computes an integer lattice basis.

Input Files:

PROJECT A matrix (needed).

Output Files:

PROJECT.lat A lattice basis.

Options:

-p, --precision=PREC Select PREC as the integer arithmetic precision.

PREC is one of the following: '64' (default), '32', and 'arbitrary' (only 'arb' is needed).

-q, --quiet Do not output anything to the screen.

3.16. zsolve 48

3.16 zsolve

PROJECT.ub

```
Usage: zsolve [options] PROJECT
Solves linear inequality and equation systems over the integers.
Basic options:
 -p PREC, --precision=PREC Use precision (32, 64, gmp). Default is 32 bit
 -m, --maxnorm
                            Write vectors with maximum norm to PROJECT.maxnorm
 -b [FREQ], --backup[=FREQ] Frequently backup status to PROJECT.backup
 -r, --resume
                            Resume from backup file PROJECT.backup
 -h, --help
                            Display this help
 --version
                            Display version information
Output options:
 -q, --quiet
                    Quiet mode
 -u, --update[=1]
                    Updated output on console (default)
 -uu, --update=2
                    More verbose updated output on console
 -v, --verbose[=1] Output once every variable computation
 -vv, --verbose=2
                    Output once every norm sum computation
 -vvv, --verbose=3 Output once every norm computation
Logging options:
 -n, --log=0
               Disable logging (default)
 -1, --log[=1] Log once every variable computation to PROJECT.log
 -11, --log=2
                Log once every norm sum computation to PROJECT.log
 -111, --log=3 Log once every norm computation to PROJECT.log
Input files:
PROJECT.mat
                Matrix
PROJECT.lat
                Lattice basis (can be provided instead of matrix)
PROJECT.rhs
                Right hand side
PROJECT.rel
                Relations (<, >, =)
PROJECT.sign
                Sign of columns (optional)
PROJECT.1b
                Lower bounds of columns (optional)
```

Upper bounds of columns (optional)

Backup files:

PROJECT.backup Backup file

PROJECT.backup~ Temporary backup file

(if it exists, it may be newer than PROJECT.backup)

Output files:

 ${\tt PROJECT.zinhom} \quad {\tt Inhomogeneous} \ \, {\tt part} \ \, {\tt of} \ \, {\tt the} \ \, {\tt solution}$

PROJECT.zhom Homogeneous part of the solution

PROJECT.zfree Free part of the solution

 ${\tt PROJECT.maxnorm\ Vectors\ with\ maximum\ norm\ (if\ -m,\ --maxnorm\ is\ in\ use)}$

3.16. zsolve 50

Chapter 4

4ti2 as a callable library

Some portions of 4ti2 can be used as a callable library to avoid I/O and process overhead. It has a simple C API that closely mirrors the commands: qsolve, rays, circuits, zsolve, hilbert, graver.

Depending on its configuration, 4ti2 builds and installs several libraries, either as static or shared libraries, using libtool.

The functions equivalent to zsolve, hilbert, graver require the use of libzsolve. The functions equivalent to qsolve, rays, circuits require the use of lib4ti2common and, depending on the arithmetic precision requested, the use of lib4ti2int32, lib4ti2int64, or lib4ti2gmp.

4.1 C API header file: 4ti2/4ti2.h

A single header file, <4ti2/4ti2.h>, provides the C API. It is reproduced below for reference.

```
/*
4ti2 -- A software package for algebraic, geometric and combinatorial
problems on linear spaces.

Copyright(C) 2008 4ti2 team.
Main author(s): Peter Malkin

This program is free software; you can redistribute it and/or
modify it under the terms of the GNU General Public License
```

```
as published by the Free Software Foundation; either version 2
of the License, or(at your option) any later version.
This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.
You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.
*/
#ifndef _4ti2_H
#define _4ti2_H
#include <inttypes.h>
#include "4ti2/4ti2_config.h"
#ifdef _4ti2_HAVE_GMP
#include <gmp.h>
#endif
#ifdef __cplusplus
extern "C"
{
#endif
// Enum representing the possible arithmetic precision settings available.
typedef enum { _4ti2_PREC_INT_32 = 32, _4ti2_PREC_INT_64 = 64, _4ti2_PREC_INT_ARB = 0 } _4ti2_precision;
// Enum representing values describing the constraints on a variable or row of the constraint matrix.
typedef enum { _4ti2_FR = 0, _4ti2_LB = 1, _4ti2_UB = -1, _4ti2_DB = 2, _4ti2_FX = 3 } _4ti2_constraint;
// Enum representing the exit status of an API call to 4ti2.
typedef enum { _4ti2_OK = 0, _4ti2_ERROR = 1 } _4ti2_status;
// 4ti2 data structures.
typedef struct _4ti2_state _4ti2_state;
typedef struct _4ti2_matrix _4ti2_matrix;
// Create a QSolve 4ti2 state object.
_4ti2_state* _4ti2_qsolve_create_state(_4ti2_precision prec);
// Create a QSolve 4ti2 rays object.
_4ti2_state* _4ti2_rays_create_state(_4ti2_precision prec);
// Create a QSolve 4ti2 circuits object.
_4ti2_state* _4ti2_circuits_create_state(_4ti2_precision prec);
// Create a ZSolve 4ti2 state object.
```

```
_4ti2_state* _4ti2_zsolve_create_state(_4ti2_precision prec);
// Create a ZSolve 4ti2 state object.
_4ti2_state* _4ti2_hilbert_create_state(_4ti2_precision prec);
// Create a ZSolve 4ti2 state object.
_4ti2_state* _4ti2_graver_create_state(_4ti2_precision prec);
// Read in options for the 4ti2 state object.
// These options are exactly the same as the command line options without the project filename at the end.
// Note that argv[0] is ignored!
_4ti2_status _4ti2_state_set_options(_4ti2_state* state, int argc, char** argv);
#if 0
  /* Implementation does not exist. --mkoeppe */
// Read in the state object from "project"
_4ti2_status _4ti2_state_read(_4ti2_state* state, const char* project);
// Write out the state object to "project"
_4ti2_status _4ti2_state_write(_4ti2_state* state, const char* project);
#endif
// Deletes a 4ti2 state object.
void _4ti2_state_delete(_4ti2_state* state);
// Runs the main algorithm of the 4ti2 state object.
_4ti2_status _4ti2_state_compute(_4ti2_state* state);
// Create a 4ti2 matrix. Previous matrix is deleted if it exists. Pointer is 0 if "name" is not valid.
_4ti2_status _4ti2_state_create_matrix(_4ti2_state* state, int num_rows, int num_cols, const char* name, _4ti2_matrix** mat
// Read a 4ti2 matrix from a file. Previous matrix is deleted if it exists. Returns 0 if "name" is not valid.
_4ti2_status _4ti2_state_read_matrix(_4ti2_state* state, const char* filename, const char* name, _4ti2_matrix** matrix);
// Get a 4ti2 matrix. Returns 0 if "name" is not valid or if matrix has not been created.
_4ti2_status _4ti2_state_get_matrix(_4ti2_state* state, const char* name, _4ti2_matrix** matrix);
// Returns the number of rows of the matrix.
int _4ti2_matrix_get_num_rows(const _4ti2_matrix* matrix);
\ensuremath{//} Returns the number of columns of the matrix.
int _4ti2_matrix_get_num_cols(const _4ti2_matrix* matrix);
// Write the 4ti2 matrix to stdout.
void _4ti2_matrix_write_to_stdout(const _4ti2_matrix* matrix);
// Write the 4ti2 matrix to sterr.
void _4ti2_matrix_write_to_stderr(const _4ti2_matrix* matrix);
// Write the 4ti2 matrix to the file called "filename".
void _4ti2_matrix_write_to_file(const _4ti2_matrix* matrix, const char* filename);
```

```
// Operations on the matrix.
_4ti2_status _4ti2_matrix_set_entry_int32_t(_4ti2_matrix* matrix, int r, int c, _4ti2_int32_t value);
_4ti2_status _4ti2_matrix_get_entry_int32_t(const _4ti2_matrix* matrix, int r, int c, _4ti2_int32_t* value);
_4ti2_status _4ti2_matrix_set_entry_int64_t(_4ti2_matrix* matrix, int r, int c, _4ti2_int64_t value);
_4ti2_status _4ti2_matrix_get_entry_int64_t(const _4ti2_matrix* matrix, int r, int c, _4ti2_int64_t* value);
#ifdef _4ti2_HAVE_GMP
_4ti2_status _4ti2_matrix_set_entry_mpz_ptr(_4ti2_matrix* matrix, int r, int c, mpz_ptr value);
_4ti2_status _4ti2_matrix_get_entry_mpz_ptr(const _4ti2_matrix* matrix, int r, int c, mpz_ptr value);
#endif
#ifdef __cplusplus
} // extern "C"
#endif
```

4.2 Example program: zsolve

Example programs using the C API can be found in the source tree of 4ti2, in the directories test/qsolve/api and test/zsolve/api.

Below we reproduce the example program test/zsolve/api/test_zsolve_api.cpp.

```
/*
4ti2 -- A software package for algebraic, geometric and combinatorial problems on linear spaces.

Copyright (C) 2006 4ti2 team.
Main author(s): Peter Malkin.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.
```

```
*/
#include "4ti2/4ti2.h"
int
main()
    // Input data.
    const int m = 4;
    const int n = 3;
    _4ti2_int64_t mat[m][n] = {
                { 2, 3, -6 },
                { 2, -1, -4 },
                { 1, 2, -11 },
                { 1, -1, 1 }
            };
    _4ti2_int64_t rel[m] = { _4ti2_LB, _4ti2_UB, _4ti2_UB, _4ti2_LB };
    _4ti2_int64_t sign[n] = { _4ti2_LB, _4ti2_LB, _4ti2_LB };
///
       // Output data.
///
        const int k = 4;
111
       int64_t zhom[k][n] = {
///
                   { 3, 4, 1 },
111
                    { 3, 8, 5 },
///
                    { 9, 2, 4 },
///
                    {19,18, 5}
///
                };
    _4ti2_state* zsolve_api = _4ti2_zsolve_create_state(_4ti2_PREC_INT_64);
    const int argc = 2;
    char*argv[2] = { (char*)"zsolve", (char*)"-q" };
    _4ti2_state_set_options(zsolve_api, argc, argv);
    _4ti2_matrix* cons_matrix;
    _4ti2_state_create_matrix(zsolve_api, m, n, "mat", &cons_matrix);
    for (int i = 0; i < m; ++i) {
        for (int j = 0; j < n; ++j) {
            _4ti2_matrix_set_entry_int64_t(cons_matrix, i, j, mat[i][j]);
    //_4ti2_matrix_write_to_stdout(cons_matrix);
    _4ti2_matrix* rel_matrix;
    _4ti2_state_create_matrix(zsolve_api, 1, m, "rel", &rel_matrix);
    for (int i = 0; i < m; ++i) {
        _4ti2_matrix_set_entry_int64_t(rel_matrix, 0, i, rel[i]);
    //_4ti2_matrix_write_to_stdout(rel_matrix);
    _4ti2_matrix* sign_matrix;
    _4ti2_state_create_matrix(zsolve_api, 1, n, "sign", &sign_matrix);
    for (int i = 0; i < n; ++i) {
```

```
_4ti2_matrix_set_entry_int64_t(sign_matrix, 0, i, sign[i]);
    //_4ti2_matrix_write_to_stdout(sign_matrix);
    _4ti2_state_compute(zsolve_api);
    _4ti2_matrix* zhom_matrix;
    _4ti2_state_get_matrix(zsolve_api, "zhom", &zhom_matrix);
   //_4ti2_matrix_write_to_stdout(zhom_matrix);
   // Check the output
///
       if (_4ti2_matrix_get_num_rows(zhom_matrix) != k) { return 1; }
///
        if (_4ti2_matrix_get_num_cols(zhom_matrix) != n) { return 1; }
///
       for (int i = 0; i < k; ++i) {
           for (int j = 0; j < n; ++j) {
///
///
               int64_t value;
///
                _4ti2_matrix_get_entry_int64_t(zhom_matrix, i, j, &value);
///
                if (value != zhom[i][j]) { return 1; }
///
///
    _4ti2_state_delete(zsolve_api);
   return 0;
```

4.3 Example program: qsolve

Below we reproduce the example program test/qsolve/api/qsolve_main.cpp.

```
/*
4ti2 -- A software package for algebraic, geometric and combinatorial problems on linear spaces.

Copyright (C) 2006 4ti2 team.

Main author(s): Peter Malkin.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.
```

You should have received a copy of the GNU General Public License

```
along with this program; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.
#include "4ti2/4ti2.h"
int
main()
    // Input data.
    const int m = 4;
    const int n = 3;
    _4ti2_int64_t mat[m][n] = {
               { 2, 3, -6 },
               { 2, -1, -4 },
               { 1, 2, -11 },
                { 1, -1, 1 }
            };
    _4ti2_int64_t rel[m] = { _4ti2_LB, _4ti2_UB, _4ti2_UB, _4ti2_LB };
    _4ti2_int64_t sign[n] = { _4ti2_LB, _4ti2_LB, _4ti2_LB };
    // Output data.
    const int k = 4;
    _4ti2_int64_t qhom[k][n] = {
                { 3, 4, 1 },
                { 3, 8, 5 },
                { 9, 2, 4 },
                {19,18, 5 }
            };
    _4ti2_state* qsolve_api = _4ti2_qsolve_create_state(_4ti2_PREC_INT_64);
    const int argc = 2;
    char*argv[2] = { (char*) "qsolve", (char*) "-q" };
    _4ti2_state_set_options(qsolve_api, argc, argv);
    _4ti2_matrix* cons_matrix;
    _4ti2_state_create_matrix(qsolve_api, m, n, "mat", &cons_matrix);
    for (int i = 0; i < m; ++i) {
        for (int j = 0; j < n; ++j) {
            _4ti2_matrix_set_entry_int64_t(cons_matrix, i, j, mat[i][j]);
        }
    }
    //_4ti2_matrix_write_to_stdout(cons_matrix);
    _4ti2_matrix* rel_matrix;
    _4ti2_state_create_matrix(qsolve_api, 1, m, "rel", &rel_matrix);
    for (int i = 0; i < m; ++i) {
        _4ti2_matrix_set_entry_int64_t(rel_matrix, 0, i, rel[i]);
    //_4ti2_matrix_write_to_stdout(rel_matrix);
    _4ti2_matrix* sign_matrix;
```

```
_4ti2_state_create_matrix(qsolve_api, 1, n, "sign", &sign_matrix);
   for (int i = 0; i < n; ++i) {
       _4ti2_matrix_set_entry_int64_t(sign_matrix, 0, i, sign[i]);
   //_4ti2_matrix_write_to_stdout(sign_matrix);
   _4ti2_state_compute(qsolve_api);
   _4ti2_matrix* qhom_matrix;
   _4ti2_state_get_matrix(qsolve_api, "qhom", &qhom_matrix);
   //_4ti2_matrix_write_to_stdout(qhom_matrix);
   // Check the output
   if (_4ti2_matrix_get_num_rows(qhom_matrix) != k) { return 1; }
   if (_4ti2_matrix_get_num_cols(qhom_matrix) != n) { return 1; }
   for (int i = 0; i < k; ++i) {
       for (int j = 0; j < n; ++j) {
            _4ti2_int64_t value;
            _4ti2_matrix_get_entry_int64_t(qhom_matrix, i, j, &value);
           if (value != qhom[i][j]) { return 1; }
       }
   }
    _4ti2_state_delete(qsolve_api);
   return 0;
}
```

Chapter 5

README: Instructions on configuring and building 4ti2

4ti2 -- A software package for algebraic, geometric and combinatorial problems on linear spaces.

Copyright (C) 1998, 2002, 2006, 2015 4ti2 team.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

COMPILING 4ti2

59

Run the following commands with the 4ti2 directory:

The final command will install 4ti2 in a directory tree below the INSTALLATION-DIRECTORY that you gave with the first command. If you omit the --prefix option, 'make install' will install 4ti2 in the /usr/local hierarchy.

You will need glpk and gmp installed first (see below).

The first command, 'make', compiles all the executables. The second command, 'make check', runs a lot of automatic checks. This will take a while. If a check fails, then please notify the 4ti2 team.

You will need gcc version 3.4 or higher.

You will need an installed version of glpk (linear programming software). See the website http://www.gnu.org/software/glpk for more information. The version 4.7 has been tested. If you do not have glpk installed or 4ti2 cannot find glpk, then the compilation will fail saying that it cannot find the file "glpk.h". If you have installed glpk but not in a location that 4ti2 finds by default, then you will need to invoke

./configure --with-glpk=/ROOT/OF/GLPK/INSTALLATION/HIERARCHY

You will also need an installed version of gmp, The GNU MP Bignum Library, with c++ support enabled (see http://www.swox.com/gmp/ for more details). Versions 4.2.1 and 4.1.4 have been tested. If you are compiling a version of gmp from the source, make sure that you enable c++ support (--enable-cxx configure option). If you have installed gmp but not in a location that 4ti2 finds by default, then you

will need to invoke

./configure --with-gmp=/ROOT/OF/GMP/INSTALLATION/HIERARCHY

If you have gmp but not with c++ support, then ./configure will fail with an error saying that the file "gmpxx.h" cannot be found.

USING MACPORTS ON MAC OS X

Use the following commands.

sudo port install gmp glpk
./configure --with-gmp=/opt/local --with-glpk=/opt/local
make
sudo make install

INSTALLATION ON WINDOWS USING CYGWIN

1. Install Cygwin from https://www.cygwin.com/

In the installer, select the following packages:

Devel: gcc-core gcc-g++ make

Math: glpk gmp libglpk-devel libgmp-devel

- 2. Make sure you unpack the 4ti2 sources into a
 C:\DIRECTORY\WITHOUT\SPACES\IN\IT
 (for example, C:\4ti2)
- 3. Open the Cygwin terminal
- 4. Type:

cd /cygdrive/c/DIRECTORY/WITHOUT/SPACES/IN/IT
./configure
make
make install

5. Now you can run 4ti2's commands from the Cygwin terminal.

DOCUMENTATION

=========

See the manual or the website http://www.4ti2.de for information on using 4ti2.

Chapter 6

NEWS: Changes to 4ti2 since version 1.2

News in 4ti2 version 1.6.9, compared to 1.6.8:

- * Updates to test suite.
- * qsolve/groebner code: More detailed warnings for PROJECT vs. PROJECT.mat
- * Fix out of bounds vector access in circuits.

 Reported by Jerry James for Fedora.

News in 4ti2 version 1.6.8, compared to 1.6.7:

- * Updates to test suite and build.
- * Fix _4ti2_rays_create_state, _4ti2_circuits_create_state.

 Reported by Alfredo Snchez-R. Navarro.
- * Merge Debian patch for PATH_MAX on Hurd. Patch from Jerome Benoit.

News in 4ti2 version 1.6.7, compared to 1.6.6:

- * Add missing amsabbrvurl.bst file required for rebuilding the documentation.

 Reported by Jerome Benoit for Debian.
- * Add tests for "walk -p arb" to testsuite
- * Build fix for Debian bug 801117 (underlinked library).

 Patch from Jerome Benoit.
- * Fix division-by-zero in "walk -p arb" for testcase 344.

 Reported by Jerome Benoit for Debian.

News in 4ti2 version 1.6.6, compared to 1.6.5:

* Fix segfault in graver when a matrix with trivial kernel is input (testcase graver/trivial-kernel).

Reported by Alfredo Sanchez.

News in 4ti2 version 1.6.5, compared to 1.6.4:

* Fix build failure with gcc 4.9.2.

News in 4ti2 version 1.6.4, compared to 1.6.3:

- * Improved error checking while reading zsolve input files.
 Reported by Sebastian Gutsche.
- * The PDF manual has been updated to include a reference to commands and their options and a reference to the API. The command reference on www.4ti2.de has also been updated.
- * Better option handling. Make long options available in non-GNU platforms such as Mac OS X. All commands now support the standard --help and --version options.
- * Minor fix to the test suite.

Reported by Luis David Garcia-Puente.

News in 4ti2 version 1.6.3, compared to 1.6.2:

- * The manual has been updated.
- * Minor build fixes.

News in 4ti2 version 1.6.2, compared to 1.6.1:

* Use GLPK's new glp_* API instead of the old lpx_* API (declared obsolete in glpk 4.47 and removed in 4.52).

(Patch by Jerry James for Fedora.)

News in 4ti2 version 1.6.1, compared to 1.6:

* Compile fix for XCode 5.0.2, Apple LLVM version 5.0 (clang-500.2.79).

News in 4ti2 version 1.6, compared to 1.5.2:

- * Restore the functionality of "hilbert" in versions up to 1.3.2 to accept "rel" files. This signalled an error in the 1.4 and 1.5 series. (Note that "zsolve" did accept "rel" files in the 1.4 and 1.5 series.)
- * When the cone is not pointed, "hilbert" now outputs a "zfree" file, containing a lattice basis, in addition to the "hil" file.

Note that in the non-pointed case, Hilbert bases are not uniquely determined. Let zfree_1, ..., zfree_k be the vectors in the "zfree" file and hil_1, ..., hil_l be the vectors in the "hil" file.

Then a Hilbert basis of the non-pointed cone is hil_1, ..., hil_l, -(hil_1 + ... + hil_l), zfree_1, ..., zfree_k.

(In the 1.3 series, "hilbert" silently appended the lattice generators to the "hil" file. Thus the list of vectors in the "hil" file was not a Hilbert basis of the non-pointed cone; this

was a bug. Note that "zsolve" did work correctly in the 1.3 series.)

- * Fix a bug of zsolve and hilbert on 64-bit platforms (where sizeof(unsigned long) > sizeof(int)), which affected problems with more than 32 variables and could lead to wrong results. (Testcases a1, dutour-testcase-2013-08-21).
- * Accept longer filenames.
- * Enable shared library builds on the Cygwin platform (using the libtool -no-undefined flag). (However, this requires that shared libraries of GMP, GLPK are available.)
- * Use gnulib to provide getopt_long if not available in the system libraries.
- * If the C++ compiler does not have int32_t and int64_t, use int and long int instead.
- * Fixed bug in lattice transformation with too few rows. (Reported by Jerry James for Fedora.)
- * Fix a build failure with gcc 4.7.

 (Patch by Jerry James for Fedora.)

News in 4ti2 version 1.5.2, compared to 1.5.1:

* Build a GMP-only 4ti2 if the C++ compiler does not have int32_t and int64_t.

News in 4ti2 version 1.5.1, compared to 1.5:

* Fix a build problem with --enable-shared.

News in 4ti2 version 1.5, compared to 1.4:

* Latest version of new qsolve.

News in 4ti2 version 1.4, compared to 1.3.2:

- * Portability fixes
- * New abstract C and C++ API (callable library), header files in 4ti2/
- * New implementation of zsolve in C++

News in 4ti2 version 1.3.2, compared to 1.3.1:

* New build system, using GNU Autoconf, Automake, and Libtool.

This allows 4ti2 to be built using the standard "./configure && make && make install" sequence.

- * Bug fixes
- * Portability fixes (for GCC versions 4.3.x and 4.4.x)

News in 4ti2 version 1.3.1, compared to 1.2:

- * 'groebner' and 'markov' are again heavily improved.
- * 'groebner' and 'markov' allow non-homogeneous lattice ideals.
- * 'groebner' and 'markov' allow truncation.
- * There is a new function 'walk' performing a Grbner walk.

- * There are new functions 'qsolve' and 'zsolve' for solving linear systems over the reals or the integers, respectively.
- * There are new functions 'rays' and 'circuits' to compute extreme rays and circuits.
- * The functions 'circuits' and 'graver' allow to fix certain orthants.
- * One may compute with projections by specifying variables to be ignored.
- * There is a new function 'minimize' to solve integer linear programs.

AUTHORS: The 4ti2 team

Ralf Hemmecke Raymond Hemmecke Matthias Koeppe Peter Malkin Matthias Walter

THANKS

Many thanks to Kris Nairn for suggesting the name '4ti2'. Cool. :-)

Moreover, lots of thanks to many 4ti2 users for suggesting many interesting and useful improvements.

