Writeup Network Scanning

Naufarrel Zhafif Abhista
13523149

Tugas

Melakukan *network scanning* di kos atau di kafe.

Detail:

1. Lokasi: Ayam-ayaman Dago
2. Tools: nmap

Script

What it does :

1. Ambil IP *device*,
2. *Scanning* untuk IP yang ada di suatu *network*
3. Simpan ke file
4. *Feed* file untuk iterasi fingerprint per IP

```bash
#!/bin/bash
set -euo pipefail

OUTDIR="scan_$(date +%Y%m%d_%H%M%S)"
mkdir -p "$OUTDIR"
HOSTS="$OUTDIR/hosts.txt"

INTERFACE=$(ip route get 1.1.1.1 | awk '{print $5; exit}')
CIDR=$(ip -o -f inet addr show "$INTERFACE" | awk '{print $4; exit}')
IP=${CIDR%/*}

echo "IP: $CIDR"

nmap -sn "$CIDR" -oG - | awk '/Up$/{print $2}' > "$HOSTS"
echo "Network scan result:"
cat "$HOSTS"

i=0
while read -r ip; do
  i=$((i+1))
  echo "[*] Fingerprinting $ip ..."
  sudo nmap -Pn -sS -sV -O --osscan-guess -T3 \
    "$ip" -oA "$OUTDIR/fp_$ip"
done < "$HOSTS"
```

Hasil:

```
 IF/Sem 7/IF4033 Keamanan Siber ❯
sudo ./script.sh                                                
```

```
SF:\">\r\n\t\tfunction\x20doNothing\(e\){\r\n\t\t\twindow\.event\.returnVa
SF:lue=false;\r\n\t\t\treturn\x20false;\r\n\t\t}\r\n\t\tvar\x20curDate\x20
SF:=\x20new\x20Date;\r\n\x20\x20\x20\x20\x20\x20\x20\x20\$LAB\.script\(\"p
SF:luginVersion\.js\?v")%r(HTTPOptions,27DC,"HTTP/1\.0\x20200\x20OK\r\nCon
SF:tent-type:\x20text/html\r\nExpires:\x200\r\n\r\n<!DOCTYPE\x20html>\r\n<
SF:html\x20xmlns=\"http://www\.w3\.org/1999/xhtml\">\r\n<head>\r\n\x20\x20
SF:\x20\x20<meta\x20http-equiv=\"Pragma\"\x20content=\"no-cache\"/>\r\n\x2
SF:0\x20\x20\x20<meta\x20http-equiv=\"Cache-Control\"\x20content=\"no-cach
SF:e,no-store,\x20must-revalidate\"/>\r\n\x20\x20\x20\x20<meta\x20http-equ
SF:iv=\"Expires\"\x20content=\"0\"/>\r\n\x20\x20\x20\x20<meta\x20http-equi
SF:v=\"Content-Type\"\x20content=\"text/html;\x20charset=utf-8\"/>\r\n\x20
SF:\x20\x20\x20<meta\x20name=\"ROBOTS\"\x20content=\"NOINDEX,\x20NOFOLLOW\
SF:"/>\r\n\x20\x20\x20\x20<meta\x20http-equiv=\"X-UA-Compatible\"\x20conte
SF:nt=\"IE=Edge\"\x20/>\r\n\x20\x20\x20\x20<title>Web\x20Viewer</title>\r\
SF:n\x20\x20\x20\x20<script\x20type=\"text/javascript\"\x20src=\"js/LAB\.m
SF:in\.js\"></script>\r\n\x20\x20\x20\x20<link\x20href=\"css/RSUI\.css\"\x
SF:20rel=\"stylesheet\"/>\r\n\x20\x20\x20\x20<link\x20href=\"css/main\.css
SF:\"\x20rel=\"stylesheet\"\x20type=\"text/css\"/>\r\n\x20\x20\x20\x20<scr
SF:ipt\x20type=\"text/javascript\">\r\n\t\tfunction\x20doNothing\(e\){\r\n
SF:\t\t\twindow\.event\.returnValue=false;\r\n\t\t\treturn\x20false;\r\n\t
SF:\t}\r\n\t\tvar\x20curDate\x20=\x20new\x20Date;\r\n\x20\x20\x20\x20\x20\
SF:x20\x20\x20\$LAB\.script\(\"pluginVersion\.js\?v");
==============NEXT SERVICE FINGERPRINT (SUBMIT INDIVIDUALLY)==============
SF-Port8899-TCP:V=7.991%I=7%D=9/3%Time=6A988097%P=x86_64-pc-linux-gnu%r(Fo
SF:urOhFourRequest,B0,"HTTP/1\.0\x20200\x20OK\r\nContent-type:\x20text/htm
SF:l\r\nExpires:\x200\r\n\r\n<html><head><title>404\x20File\x20Not\x20Foun
SF:d</title></head>\n<body>The\x20requested\x20URL\x20was\x20not\x20found\
SF:x20on\x20this\x20server</body></html>\n");
MAC Address: 90:31:4B:EB:78:22 (AltoBeam)
Device type: general purpose
Running: Linux 3.X
OS CPE: cpe:/o:linux:linux_kernel:3
OS details: Linux 3.2 - 3.16
Network Distance: 1 hop
Service Info: Device: storage-misc

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/
Nmap done: 1 IP address (1 host up) scanned in 58.95 seconds
```


```
SF:v=\"Content-Type\"\x20content=\"text/html;\x20charset=utf-8\"/>\r\n\x20
SF:\x20\x20\x20<meta\x20name=\"ROBOTS\"\x20content=\"NOINDEX,\x20NOFOLLOW\
SF:"/>\r\n\x20\x20\x20\x20<meta\x20http-equiv=\"X-UA-Compatible\"\x20conte
SF:nt=\"IE=Edge\"\x20/>\r\n\x20\x20\x20\x20<title>Web\x20Viewer</title>\r\
SF:n\x20\x20\x20\x20<script\x20type=\"text/javascript\"\x20src=\"js/LAB\.m
SF:in\.js\"></script>\r\n\x20\x20\x20\x20<link\x20href=\"css/RSUI\.css\"\x
SF:20rel=\"stylesheet\"/>\r\n\x20\x20\x20\x20<link\x20href=\"css/main\.css
SF:\"\x20rel=\"stylesheet\"\x20type=\"text/css\"/>\r\n\x20\x20\x20\x20<scr
SF:ipt\x20type=\"text/javascript\">\r\n\t\tfunction\x20doNothing\(e\){\r\n
SF:\t\t\twindow\.event\.returnValue=false;\r\n\t\t\treturn\x20false;\r\n\t
SF:\t}\r\n\t\tvar\x20curDate\x20=\x20new\x20Date;\r\n\x20\x20\x20\x20\x20\
SF:x20\x20\x20\$LAB\.script\(\"pluginVersion\.js\?v");
==============NEXT SERVICE FINGERPRINT (SUBMIT INDIVIDUALLY)==============
SF-Port8899-TCP:V=7.991%I=7%D=9/3%Time=6A988097%P=x86_64-pc-linux-gnu%r(Fo
SF:urOhFourRequest,B0,"HTTP/1\.0\x20200\x20OK\r\nContent-type:\x20text/htm
SF:l\r\nExpires:\x200\r\n\r\n<html><head><title>404\x20File\x20Not\x20Foun
SF:d</title></head>\n<body>The\x20requested\x20URL\x20was\x20not\x20found\
SF:x20on\x20this\x20server</body></html>\n");
MAC Address: 90:31:4B:EB:78:22 (AltoBeam)
Device type: general purpose
Running: Linux 3.X
OS CPE: cpe:/o:linux:linux_kernel:3
OS details: Linux 3.2 - 3.16
Network Distance: 1 hop
Service Info: Device: storage-misc

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 58.95 seconds
```

```
[*] Fingerprinting 192.168.0.111 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:01 +0700
Nmap done: 1 IP address (0 hosts up) scanned in 1.52 seconds
[*] Fingerprinting 192.168.0.117 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:01 +0700
Nmap scan report for 192.168.0.117
Host is up (0.018s latency).
Not shown: 997 closed tcp ports (reset)
PORT     STATE SERVICE    VERSION
80/tcp   open  http
554/tcp  open  rtsp       H264DVR rtspd 1.0
8899/tcp open  ospf-lite?
2 services unrecognized despite returning data. If you know the service/version, please submit the following fingerprints at https://nmap.org/cgi-bin/submit.cgi?new-service :
==============NEXT SERVICE FINGERPRINT (SUBMIT INDIVIDUALLY)==============
SF-Port80-TCP:V=7.991%I=7%D=9/3%Time=6A9880B9%P=x86_64-pc-linux-gnu%r(GetR
SF:equest,27DC,"HTTP/1\.0\x20200\x20OK\r\nContent-type:\x20text/html\r\nEx
SF:pires:\x200\r\n\r\n<!DOCTYPE\x20html>\r\n<html\x20xmlns=\"http://www\.w
SF:3\.org/1999/xhtml\">\r\n<head>\r\n\x20\x20\x20\x20<meta\x20http-equiv=\
SF:"Pragma\"\x20content=\"no-cache\"/>\r\n\x20\x20\x20\x20<meta\x20http-eq
SF:uiv=\"Cache-Control\"\x20content=\"no-cache,no-store,\x20must-revalidat
SF:e\"/>\r\n\x20\x20\x20\x20<meta\x20http-equiv=\"Expires\"\x20content=\"0
SF:\"/>\r\n\x20\x20\x20\x20<meta\x20http-equiv=\"Content-Type\"\x20content
SF:=\"text/html;\x20charset=utf-8\"/>\r\n\x20\x20\x20\x20<meta\x20name=\"R
SF:OBOTS\"\x20content=\"NOINDEX,\x20NOFOLLOW\"/>\r\n\x20\x20\x20\x20<meta\
SF:x20http-equiv=\"X-UA-Compatible\"\x20content=\"IE=Edge\"\x20/>\r\n\x20\
SF:x20\x20\x20<title>Web\x20Viewer</title>\r\n\x20\x20\x20\x20<script\x20t
SF:ype=\"text/javascript\"\x20src=\"js/LAB\.min\.js\"></script>\r\n\x20\x2
SF:0\x20\x20<link\x20href=\"css/RSUI\.css\"\x20rel=\"stylesheet\"/>\r\n\x2
SF:0\x20\x20\x20<link\x20href=\"css/main\.css\"\x20rel=\"stylesheet\"\x20t
SF:ype=\"text/css\"/>\r\n\x20\x20\x20\x20<script\x20type=\"text/javascript
SF:\">\r\n\t\tfunction\x20doNothing\(e\){\r\n\t\t\twindow\.event\.returnVa
SF:lue=false;\r\n\t\t\treturn\x20false;\r\n\t\t}\r\n\t\tvar\x20curDate\x20
SF:=\x20new\x20Date;\r\n\x20\x20\x20\x20\x20\x20\x20\x20\$LAB\.script\(\"p
SF:luginVersion\.js\?v")%r(HTTPOptions,27DC,"HTTP/1\.0\x20200\x20OK\r\nCon
SF:tent-type:\x20text/html\r\nExpires:\x200\r\n\r\n<!DOCTYPE\x20html>\r\n<
SF:html\x20xmlns=\"http://www\.w3\.org/1999/xhtml\">\r\n<head>\r\n\x20\x20
SF:\x20\x20<meta\x20http-equiv=\"Pragma\"\x20content=\"no-cache\"/>\r\n\x2
SF:0\x20\x20\x20<meta\x20http-equiv=\"Cache-Control\"\x20content=\"no-cach
SF:e,no-store,\x20must-revalidate\"/>\r\n\x20\x20\x20\x20<meta\x20http-equ
==============NEXT SERVICE FINGERPRINT (SUBMIT INDIVIDUALLY)==============
SF-Port8899-TCP:V=7.991%I=7%D=9/3%Time=6A9880D2%P=x86_64-pc-linux-gnu%r(Fo
SF:urOhFourRequest,B0,"HTTP/1\.0\x20200\x20OK\r\nContent-type:\x20text/htm
SF:l\r\nExpires:\x200\r\n\r\n<html><head><title>404\x20File\x20Not\x20Foun
SF:d</title></head>\n<body>The\x20requested\x20URL\x20was\x20not\x20found\
SF:x20on\x20this\x20server</body></html>\n");
MAC Address: 90:31:4B:EA:9C:C2 (AltoBeam)
Device type: general purpose
Running: Linux 3.X
OS CPE: cpe:/o:linux:linux_kernel:3
OS details: Linux 3.2 - 3.16
Network Distance: 1 hop
Service Info: Device: storage-misc

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 58.79 seconds
Nmap scan report for 192.168.0.138
Host is up (0.26s latency).
All 1000 scanned ports on 192.168.0.138 are in ignored states.
Not shown: 1000 closed tcp ports (reset)
MAC Address: C0:87:EB:90:6B:71 (Samsung Electronics)
Too many fingerprints match this host to give specific OS details
Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 3.77 seconds
[*] Fingerprinting 192.168.0.142 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:02 +0700
Nmap scan report for 192.168.0.142
Host is up (0.028s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE    VERSION
49152/tcp open  tcpwrapped
62078/tcp open  tcpwrapped
MAC Address: 66:EA:03:0B:F2:C7 (Unknown)
Device type: phone
Running: Apple iOS 15.X
OS CPE: cpe:/o:apple:iphone_os:15
OS details: Apple iOS 15.0 - 15.6 (Darwin 21.1.0 - 21.6.0)
Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 2.94 seconds
[*] Fingerprinting 192.168.0.149 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:03 +0700
Nmap scan report for 192.168.0.149
Host is up (0.063s latency).
Not shown: 999 closed tcp ports (reset)
PORT     STATE    SERVICE VERSION
5060/tcp filtered sip
MAC Address: 0C:98:38:1E:39:2F (Xiaomi Communications)
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Device type: general purpose
Running: Linux 2.6.X
OS CPE: cpe:/o:linux:linux_kernel:2.6.23
OS details: Linux 2.6.23, Linux 2.6.27
Network Distance: 1 hop
```

```
[*] Fingerprinting 192.168.0.153 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:03 +0700
Nmap scan report for 192.168.0.153
Host is up (0.17s latency).
All 1000 scanned ports on 192.168.0.153 are in ignored states.
Not shown: 1000 closed tcp ports (reset)
MAC Address: 5C:D0:6E:25:B1:37 (Xiaomi Communications)
Too many fingerprints match this host to give specific OS details
Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 278.87 seconds
[*] Fingerprinting 192.168.0.167 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:07 +0700
Nmap scan report for 192.168.0.167
Host is up (0.023s latency).
Not shown: 999 closed tcp ports (reset)
PORT     STATE SERVICE VERSION
8089/tcp open  unknown
1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new
-service :
SF-Port8089-TCP:V=7.991%I=7%D=9/3%Time=6A98824D%P=x86_64-pc-linux-gnu%r(LA
SF:NDesk-RC,47,"\x18\x08\x038\x01\0\0\0\0\0\0\x007\0\0\0{\"id\":0,\"chn\":
SF:0,\"ts\":1788379506,\"result\":{\"code\":1102}}");
MAC Address: 5C:4E:EE:C3:0D:D3 (AltoBeam)
Device type: specialized|general purpose|webcam
Running (JUST GUESSING): OSRAM embedded (89%), lwIP 2.X|1.4.X (89%), Milight embedded (89%), Denver Electronics embedded (89%), Philips embedded (89%), IHome embe
dded (88%), iRobot embedded (88%)
OS CPE: cpe:/h:osram:lightify cpe:/a:lwip_project:lwip:2 cpe:/a:lwip_project:lwip cpe:/h:denver_electronics:ac-5000w cpe:/a:lwip_project:lwip:1.4.0 cpe:/h:philips
:hue_bridge cpe:/h:ihome:isp5wwc cpe:/h:irobot:roomba_980
Aggressive OS guesses: OSRAM Lightify ZigBee gateway (89%), lwIP 2.1.0 - 2.2.0 (89%), lwIP 1.4.1 - 2.0.3 (89%), Milight WiFi Receiver bridge (89%), Denver Electro
nics AC-5000W MK2 camera (89%), lwIP 1.4.0 or earlier (89%), Philips Hue Bridge (lwIP 1.4.1) (89%), IHome SmartPlug iSP5WWC (88%), iRobot Roomba 980 vacuum cleane
r (88%), AudioControl D3400 network amplifier (88%)
No exact OS matches for host (If you know what OS is running on it, see https://nmap.org/submit/ ).
TCP/IP fingerprint:
OS:SCAN(V=7.991%E=4%D=9/3%OT=8089%CT=1%CU=43675%PV=Y%DS=1%DC=D%G=Y%M=5C4EEE
OS:%TM=6A98826E%P=x86_64-pc-linux-gnu)SEQ(SP=41%GCD=1%ISR=9C%TI=I%CI=I%TS=U
OS:)SEQ(SP=45%GCD=1%ISR=9C%TI=I%CI=I%II=RI%SS=S%TS=U)SEQ(SP=46%GCD=1%ISR=9C
OS:%TI=I%CI=I%TS=U)SEQ(SP=48%GCD=1%ISR=9C%TI=I%CI=I%TS=U)OPS(O1=M578NW3%O2=
OS:M578NW3%O3=M578NW3%O4=M578NW3%O5=M578NW3%O6=M578)WIN(W1=A410%W2=A410%W3=
OS:A410%W4=A410%W5=A410%W6=A410)ECN(R=Y%DF=N%T=FF%W=A410%O=M578NW3%CC=N%Q=)
OS:T1(R=Y%DF=N%T=FF%S=O%A=S+%F=AS%RD=0%Q=)T2(R=N)T3(R=Y%DF=N%T=FF%W=A410%S=
```

```
[*] Fingerprinting 192.168.0.179 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:09 +0700
Nmap scan report for 192.168.0.179
Host is up (0.18s latency).
All 1000 scanned ports on 192.168.0.179 are in ignored states.
Not shown: 1000 closed tcp ports (reset)
MAC Address: C4:6E:33:7F:E8:8D (Zhong Ge Smart Technology)
Too many fingerprints match this host to give specific OS details
Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 858.42 seconds
[*] Fingerprinting 192.168.0.180 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:23 +0700
Nmap scan report for 192.168.0.180
Host is up (0.14s latency).
All 1000 scanned ports on 192.168.0.180 are in ignored states.
Not shown: 1000 closed tcp ports (reset)
MAC Address: E0:1F:88:6C:88:28 (Xiaomi Communications)
Too many fingerprints match this host to give specific OS details
Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 6.32 seconds
[*] Fingerprinting 192.168.0.214 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:23 +0700
Nmap done: 1 IP address (0 hosts up) scanned in 1.53 seconds
[*] Fingerprinting 192.168.0.215 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:23 +0700
Nmap scan report for 192.168.0.215
Host is up (0.11s latency).
Not shown: 999 closed tcp ports (reset)
PORT  STATE    SERVICE VERSION
7/tcp filtered echo
MAC Address: 0A:D2:E5:80:90:2C (Unknown)
Too many fingerprints match this host to give specific OS details
Network Distance: 1 hop
```

```
[*] Fingerprinting 192.168.0.234 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:23 +0700
Nmap scan report for 192.168.0.234
Host is up (0.017s latency).
Not shown: 999 closed tcp ports (reset)
PORT      STATE SERVICE    VERSION
62078/tcp open  tcpwrapped
MAC Address: 3A:5E:F4:BB:DC:C0 (Unknown)
Device type: phone
Running: Apple iOS 15.X
OS CPE: cpe:/o:apple:iphone_os:15
OS details: Apple iOS 15.0 - 15.6 (Darwin 21.1.0 - 21.6.0)
Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 2.59 seconds
[*] Fingerprinting 192.168.0.239 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:23 +0700
Nmap scan report for 192.168.0.239
Host is up (0.029s latency).
Not shown: 999 closed tcp ports (reset)
PORT     STATE SERVICE VERSION
8089/tcp open  unknown
1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new
-service :
SF-Port8089-TCP:V=7.991%I=7%D=9/3%Time=6A98861A%P=x86_64-pc-linux-gnu%r(LA
SF:NDesk-RC,47,"\x18\x08\x038\x01\0\0\0\0\0\0\x007\0\0\0{\"id\":0,\"chn\":
SF:0,\"ts\":1788380478,\"result\":{\"code\":1102}}");
MAC Address: 4C:37:DE:DC:CA:11 (AltoBeam)
Device type: specialized|general purpose|webcam|security-misc
Running (JUST GUESSING): OSRAM embedded (89%), lwIP 2.X|1.4.X (89%), Denver Electronics embedded (89%), Meross embedded (89%), Chamberlain Group embedded (88%), I
Home embedded (88%), iRobot embedded (88%), Henry Electronic embedded (88%)
OS CPE: cpe:/h:osram:lightify cpe:/a:lwip_project:lwip:2 cpe:/a:lwip_project:lwip cpe:/h:denver_electronics:ac-5000w cpe:/a:lwip_project:lwip:1.4.0 cpe:/h:ihome:i
sp5wwc cpe:/h:irobot:roomba_980
Aggressive OS guesses: OSRAM Lightify ZigBee gateway (89%), lwIP 2.1.0 - 2.2.0 (89%), lwIP 1.4.1 - 2.0.3 (89%), Denver Electronics AC-5000W MK2 camera (89%), lwIP
 1.4.0 or earlier (89%), Meross Smart Wi-Fi Hub (89%), Chamberlain myQ garage door opener (88%), IHome SmartPlug iSP5WWC (88%), iRobot Roomba 980 vacuum cleaner (
88%), Henry Argos biometric access control (88%)
No exact OS matches for host (If you know what OS is running on it, see https://nmap.org/submit/ ).
TCP/IP fingerprint:
```

```
[*] Fingerprinting 192.168.0.243 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:25 +0700
Nmap scan report for 192.168.0.243
Host is up (0.069s latency).
Not shown: 998 closed tcp ports (reset)
PORT     STATE SERVICE      VERSION
443/tcp  open  ssl/https?
8800/tcp open  sunwebadmin?
1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new
-service :
```

```
SF:"HTTP/1\.0\x20400\x20Bad\x20Request\r\nCSeq:\x200\r\nDate:\x20Wed,\x200
SF:2\x20Sep\x202026\x2020:23:26\x20UTC\r\n\r\n");
MAC Address: AC:15:A2:1E:52:BE (TP-Link Systems)
Aggressive OS guesses: OpenWrt Attitude Adjustment 12.09-RC2 (Linux 3.3.8) (96%), Asus RT-N10 router or AXIS 211A Network Camera (Linux 2.6) (95%), Linux 2.6.18 (
95%), Linksys WRV54G WAP (95%), Linux 2.6.16 (94%), MikroTik RouterOS 6.36 - 6.48 (Linux 3.3.5) (93%), Linux 2.6.32 - 3.10 (93%), Dell Integrated Remote Access Co
ntroller (iDRAC7) (92%), OpenWrt Attitude Adjustment 12.09 (Linux 2.6) (92%), OpenWrt Attitude Adjustment (Linux 3.3) (92%)
No exact OS matches for host (If you know what OS is running on it, see https://nmap.org/submit/ ).
TCP/IP fingerprint:
OS:SCAN(V=7.991%E=4%D=9/3%OT=443%CT=1%CU=39445%PV=Y%DS=1%DC=D%G=Y%M=AC15A2%
OS:TM=6A9886F1%P=x86_64-pc-linux-gnu)SEQ(SP=101%GCD=1%ISR=105%TI=Z%CI=Z%TS=
OS:7)SEQ(SP=102%GCD=1%ISR=10C%TI=Z%CI=Z%II=I%TS=7)SEQ(SP=104%GCD=1%ISR=10A%
OS:TI=Z%CI=Z%TS=7)SEQ(SP=105%GCD=1%ISR=10C%TI=Z%CI=Z%TS=7)SEQ(SP=FF%GCD=1%I
OS:SR=107%TI=Z%CI=Z%TS=7)OPS(O1=M5A0ST11NW0%O2=M5A0ST11NW0%O3=M5A0NNT11NW0%
OS:O4=M5A0ST11NW0%O5=M5A0ST11NW0%O6=M5A0ST11)WIN(W1=37C8%W2=37C8%W3=37C8%W4
OS:=37C8%W5=37C8%W6=37C8)ECN(R=Y%DF=Y%T=40%W=3840%O=M5A0NNSNW0%CC=N%Q=)T1(R
OS:=Y%DF=Y%T=40%S=O%A=S+%F=AS%RD=0%Q=)T2(R=N)T3(R=N)T4(R=Y%DF=Y%T=40%W=0%S=
OS:A%A=Z%F=R%O=%RD=0%Q=)T5(R=Y%DF=Y%T=40%W=0%S=Z%A=S+%F=AR%O=%RD=0%Q=)T6(R=
OS:Y%DF=Y%T=40%W=0%S=A%A=Z%F=R%O=%RD=0%Q=)T7(R=Y%DF=Y%T=40%W=0%S=Z%A=S+%F=A
OS:R%O=%RD=0%Q=)U1(R=Y%DF=N%T=40%IPL=164%UN=0%RIPL=G%RID=G%RIPCK=G%RUCK=G%R
OS:UD=G)IE(R=N)IE(R=Y%DFI=N%T=40%CD=S)

Network Distance: 1 hop

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 180.93 seconds
[*] Fingerprinting 192.168.0.185 ...
Starting Nmap 7.991 ( https://nmap.org ) at 2026-09-03 03:28 +0700
Nmap scan report for 192.168.0.185
Host is up (0.00016s latency).
Not shown: 999 filtered tcp ports (no-response)
PORT     STATE SERVICE VERSION
3306/tcp open  mysql   MariaDB 12.3.3
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port
Aggressive OS guesses: Linux 5.0 - 6.2 (96%), Linux 6.17 (96%), Linux 5.8 (93%), HP P2000 G3 NAS device (92%), Linux 3.12 (91%), Linux 3.7 - 4.19 (91%), Linux 6.8
 (91%), Linux 2.6.32 (91%), Linux 3.8 - 3.9 (91%), Linux 4.1 (91%)
No exact OS matches for host (test conditions non-ideal).
Network Distance: 0 hops

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 12.82 seconds
```

Kesimpulan

Ringkasan

Scanning dilakukan di Ayam-ayaman Dago lewat Wi-Fi yang sama dengan pelanggan lain.

1. Jaringannya *flat* `192.168.0.0/24` (satu broadcast domain, tanpa VLAN), gateway di `192.168.0.1`, dan mesin *scanner* dapat IP `192.168.0.185/24`.
2. *Host discovery* (`nmap -sn`), dapat ~17 host. Tidak ada *client isolation* / *AP isolation*: dari posisi sebagai *guest* biasa, semua host di subnet bisa di-*probe*, di-*port scan*, dan dicoba di-*fingerprint* tanpa hambatan L2.

Tabel Host

IP	MAC	Vendor (OUI)	Port terbuka	OS guess (nmap)	Dugaan device
`.1`	`A8:42:A1:9F:08:E4`	TP-Link Systems	53/domain (REFUSED), 80/http `BusyBox httpd 1.19.4`, 443/ssl-http `BusyBox 1.19.4`, 1900/upnp `MiniUPnP 1.8`	no exact match; guess Linux 3.x / MikroTik RouterOS	Router / gateway consumer TP-Link
`.105`	`90:31:4B:EB:78:22`	AltoBeam	80/http, 554/rtsp `H264DVR rtspd 1.0`, 8899/ `ospf-lite?`	Linux 3.2 – 3.16	DVR / NVR CCTV (title "Web Viewer")
`.111`	–	–	–	–	Sempat *up* saat *discovery*, hilang saat *fingerprint* (0 hosts up)
`.117`	`90:31:4B:EA:9C:C2`	AltoBeam	80/http, 554/rtsp `H264DVR rtspd 1.0`, 8899/ `ospf-lite?`	Linux 3.2 – 3.16	DVR / NVR CCTV
`.138`	`C0:87:EB:90:6B:71`	Samsung Electronics	semua 1000 port `closed`	too many fingerprints	HP / perangkat Samsung
`.142`	`66:EA:03:0B:F2:C7`	Unknown (LAA / randomized)	49152/ `tcpwrapped`, 62078/ `tcpwrapped` (iOS `lockdownd`)	Apple iOS 15.0 – 15.6 (Darwin 21)	iPhone, MAC di-random
`.149`	`0C:98:38:1E:39:2F`	Xiaomi Communications	5060/tcp `filtered` sip	Linux 2.6.23 / 2.6.27 (OSScan unreliable)	HP Xiaomi / Android
`.153`	`5C:D0:6E:25:B1:37`	Xiaomi Communications	semua 1000 port `closed`	too many fingerprints	HP Xiaomi / Android

IP	MAC	Vendor (OUI)	Port terbuka	OS guess (nmap)	Dugaan device
`.167`	`5C:4E:EE:C3:0D:D3`	AltoBeam	8089/tcp `NDesk-RC` (JSON `{"chn":0,...,"result":{"code":1102}}`)	no exact match; guess embedded (lwIP / OSRAM / iRobot — *just guessing*)	IP camera
`.179`	`C4:6E:33:7F:E8:8D`	Zhong Ge Smart Technology	semua 1000 port `closed`	too many fingerprints	IoT / smart device
`.180`	`E0:1F:88:6C:88:28`	Xiaomi Communications	semua 1000 port `closed`	too many fingerprints	HP / IoT Xiaomi
`.214`	–	–	–	–	Sempat *up* saat *discovery*, hilang saat *fingerprint* (0 hosts up)
`.215`	`0A:D2:E5:80:90:2C`	Unknown (LAA / randomized)	7/tcp `filtered` echo	too many fingerprints	Kemungkinan HP, MAC di-random
`.234`	`3A:5E:F4:BB:DC:C0`	Unknown (LAA / randomized)	62078/`tcpwrapped` (iOS `lockdownd`)	Apple iOS 15.0 – 15.6 (Darwin 21)	iPhone, MAC di-random
`.239`	`4C:37:DE:DC:CA:11`	AltoBeam	8089/tcp `NDesk-RC` (JSON `code:1102`)	no exact match; guess embedded	IP camera (sekelas `.167`)
`.243`	`AC:15:A2:1E:52:BE`	TP-Link Systems	443/`ssl/https?`, 8800/`sunwebadmin?` (respons ada header `CSeq:` → RTSP)	no exact match; guess OpenWrt / Linux 2.6, "Asus RT-N10 atau AXIS 211A Network Camera"	IP camera TP-Link (Tapo/Kasa)
`.185`	*(self)*	–	3306/tcp mysql `MariaDB 12.3.3`	Linux 5.x – 6.x	Mesin *scanner* sendiri (Arch)


Kesimpulan

Note:

- Gateway `.1` = router consumer TP-Link jalan `BusyBox httpd 1.19.4` (rilis ~2011). UPnP (`MiniUPnP 1.8`, port 1900) terbuka ke LAN. Port 53 kebuka tapi DNS query di-`REFUSED`. Tidak ada *exact OS match*, *service info* hanya mengatakan "Device: broadband router; Linux".
- **Device class dominan = CCTV / surveillance.** Minimal 5 device kamera:
  - `.105`, `.117` → DVR/NVR pakai `H264DVR rtspd 1.0` di port 554 + web UI "Web Viewer" di 80 (chipset AltoBeam).
  - `.167`, `.239` → IP camera AltoBeam, protokol `NDesk-RC` di port 8089, balas JSON `{"chn":..., "result":{"code":1102}}`.
  - `.243` → IP camera TP-Link, jawab *handshake* mirip RTSP (`CSeq:`) di 443/8800.
  Semua kamera ini **satu subnet dengan device *customer***, tidak dipisah.
- HP: iPhone iOS 15 (`.142`, `.234`), Xiaomi/Android (`.149`, `.153`, `.180`), Samsung (`.138`), *most likely* punya pelanggan. Sisanya IoT (`.179` Zhong Ge Smart).
- HP modern menutup/men-*filter* semua port. `nmap` OSScan butuh minimal 1 port `open` + 1 port `closed` untuk kalibrasi; kalau semua `closed` / `filtered`, hasilnya "Too many fingerprints match this host" atau "No exact OS matches", dan sering muncul "Warning: OSScan results may be unreliable".
- `.142`, `.215`, `.234` pakai *locally-administered address* (bit ke-2 oktet pertama = 1: `66:`, `0A:`, `3A:`). *Vendor lookup* OUI jadi "Unknown", jadi *fingerprinting* berbasis OUI mati total. Yang MAC-nya asli (Apple/Samsung/Xiaomi/TP-Link) masih ketahuan pabrikannya.
- `.111` dan `.214` terbaca *up* pas *host discovery* (ARP), tetapi ketika di-*fingerprint* beberapa menit kemudian sudah `0 hosts up`.
  - Penyebabnya bisa karena DHCP ganti, *device disconnected*
- Beberapa *scan* lambat (`.153` 278 s, `.167` ~910 s, `.179` 858 s, `.243` 181 s) karena kombinasi port `filtered` + *rate limiting* + retry `--osscan-guess`.

Catatan Keamanan

- CCTV/DVR se-subnet dengan *guest*. Kalau salah satu kamera masih pakai *default credential*, siapa pun yang konek Wi-Fi bisa akses *stream* RTSP dan web UI-nya. Idealnya kamera ditaruh di VLAN/SSID terpisah dari pelanggan

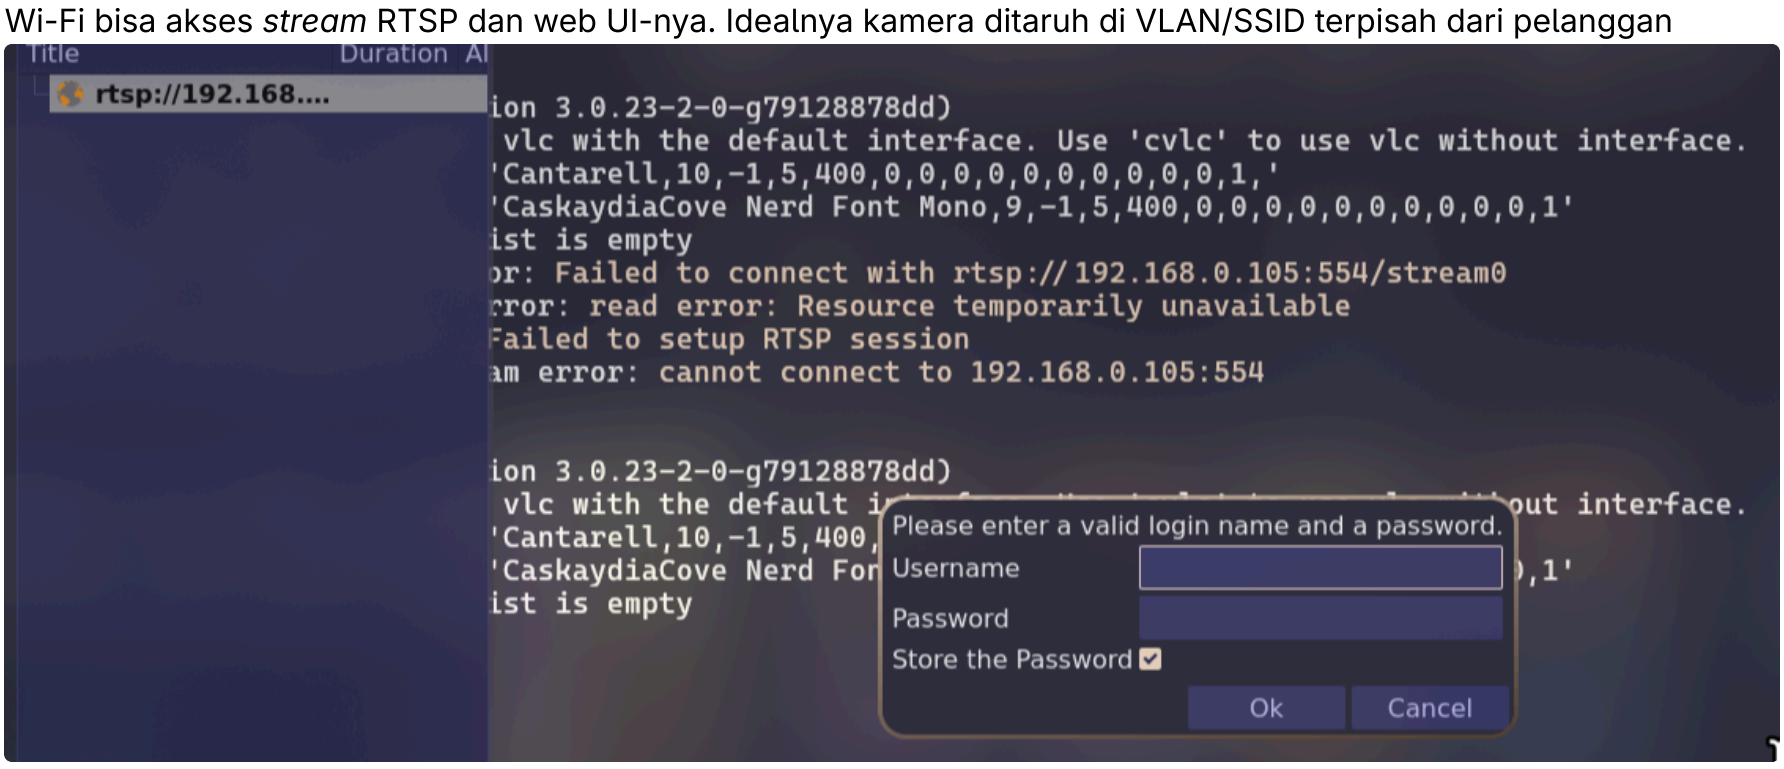

  Di sini masih aman (belum coba bypass auth), *default* tidak ada yang tembus.
- Router jalan BusyBox 1.19.4, versinya sangat *outdated* :)
- UPnP aktif di gateway (routernya), padahal *wi-fi*-nya publik.
  - *A UPnP protocol could permit devices with critical vulnerabilities to connect to your network and sensitive resources.* (Bacaan)
  - Jika ada *device* yang terjangkit malware, penyebarannya lebih mudah (tetapi tidak serta menjadi mudah) dengan memanfaatkan protokol UPnP.
- Tidak terlihat VLAN maupun *client isolation* Satu jaringan datar untuk router + CCTV + kasir(?) + semua HP pelanggan.