

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

# OSRAM Lighting Private Limited

## Warehouse Standard Operating Procedure (SOP)

|                    |                |
|--------------------|----------------|
| Document reference | : SOP          |
| Document Version   | : 1.0          |
| Issue date         | : 01-03-2020   |
| Created by         | : Pavan Pathak |
| Status             | : Approved     |

Customer: All India Warehouse Program:  
SOP

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### **Revision history:**

| Version | Issue Date | Author       | Remarks  | Status * |
|---------|------------|--------------|----------|----------|
| 1.0     | 01.03.2020 | Pavan Pathak | Revision |          |

### **Document change request:**

Any request for change or addition to this document should be done by e-mail to one of the following persons:

| Name                      | Role             | Organization                         |
|---------------------------|------------------|--------------------------------------|
| Mr. Anand Singh Bhadauria | Head - Logistics | OSRAM<br>Lighting Private<br>Limited |

Any new release of this document can only be issued by Mr. Anand Bhadauria and must be distributed with an acknowledgement of reception to all the people mentioned below in the distribution list

### **Distribution & approval list:**

| Name                      | Role/ Title      | Organization | Action *       |
|---------------------------|------------------|--------------|----------------|
| Mr. Anand Singh Bhadauria | Head - Logistics | OLPL         | Final Approval |
|                           |                  |              |                |

### **Document sign off:**

| Name                      | Title            | Organization | Date | Signature |
|---------------------------|------------------|--------------|------|-----------|
| Mr. Anand Singh Bhadauria | Head - Logistics | OLPL         |      |           |
|                           |                  |              |      |           |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 1. Introduction of Standard Operating Procedure

Standard Operating Procedures (SOPs) have been developed to serve as guidelines for both OSRAM and 3PL. The aim of this report is to define the standard operating procedures (SOP) applied to warehousing.

An SOP is an authorized written procedure giving instructions for performing operations. SOPs can be defined as established methods to be followed routinely for the performance of designated operations or in designated situations. These are concise and specific step-by-step instructions that allow an individual with limited knowledge or experience on the procedure to successfully reproduce the activities.

SOPs are also very useful in training employees and in establishing a consistent method for conducting daily operations.

#### ▪ Document objective

The cornerstone of an effective solution is the development and implementation of standard operating procedures, (SOP's) Service consistency and reliability is in part the outcome of compliance to these procedures. On OSRAM selecting 3PL as their service provider, a full audit of the business processes both physical and data flows would be conducted. Shared SOP's will be outline what is physically required from each individual involved in the process. The SOP's form a template for each transaction and ensure consistency and clarity for all concerned.

Furthermore, SOP's will be reviewed on a regular basis to ensure that the agreed procedures are being maintained. These reviews will also highlight opportunities for continual service improvement and / or uncover areas where costs savings to OSRAM and 3PL can be implemented.

#### ▪ Warehousing

Warehousing functions are playing an increasingly important role in the business world and are now being recognized for the contribution they have to the profitability of a company.

#### ▪ Abbreviation

| Acronym | Business term            |
|---------|--------------------------|
| 3PL     | Service Provider         |
| SAP     | SAP R3, OSRAM ERP system |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

|      |                             |
|------|-----------------------------|
| IB   | Inbound Delivery            |
| OB   | Outbound Delivery           |
| RO   | Receiving Order             |
| GR   | Inbound Receipts            |
| DO   | Delivery Order              |
| STO  | Stock Transfer Order        |
| SI   | Shipping Instruction        |
| GI   | Goods Issue                 |
| POD  | Proof of Delivery           |
| INV  | Invoice                     |
| WH   | Warehouse                   |
| CI   | Commercial Invoice          |
| PL   | Packing List                |
| PDCs | Gurgaon / Mumbai            |
| CHEN | Chennai OSRAM Factory       |
| IMP  | Imports                     |
| PO   | Purchase Order              |
| HO   | Head Office                 |
| LOG  | Logistics                   |
| IBT  | Inter Branch Transfer       |
| STO  | Stock Transfer Order        |
| WMS  | Warehouse Management System |

### ■ Important project assumptions

OSRAM had appointed 3PL as a Logistics partner, which provides warehousing services to support the customers' requirements.

The following table outlines the facilities and services to be provided by 3PL.

| Scope             | Requirements                                                                                                                                                                                                                                                                                                  |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Facilities</b> | Warehouse Storage <ul style="list-style-type: none"><li>- Loading area/unloading area</li><li>- Receiving area</li><li>- Unrestricted storage area</li><li>- Stacking area</li><li>- Issuing area</li><li>- Packing area on demand</li><li>- Block area</li><li>- Quality inspection area (In PDCs)</li></ul> |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

|                              |                                                                                                                                                                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Warehousing Services-</b> | <ul style="list-style-type: none"> <li>- Goods receiving/ issue</li> <li>- Picking/packing</li> <li>- Returning and Scrapping</li> <li>- Stock taking / cycle counting</li> <li>- Value added service</li> <li>- Documentation &amp; Records</li> <li>- Administration and performance reporting</li> </ul> |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

The objective is to provide a solution that can offload Logistics operation management from OSRAM, so that OSRAM can focus on its core business needs.

### ▪ Transaction types (inward / outward/ returns)


| Sr. No. | Description                         | Type of Receipts               | Type of Material Receipts |              |
|---------|-------------------------------------|--------------------------------|---------------------------|--------------|
|         |                                     | Inbound Goods                  | Normal Goods              | Excise Goods |
|         | <b>INBOUND</b>                      |                                |                           |              |
| 1       | Receipts from Import vendor         | Purchase                       | YES                       | YES          |
| 2       | Receipts from Domestic/Local Vendor | Purchase                       |                           |              |
| 3       | Receipts from WH to WH              | Stock Transfers                |                           |              |
|         | <b>OUTBOUND</b>                     |                                |                           |              |
| 1       | Customer Sale Invoice               | Sale                           | YES                       | YES          |
| 2       | Sample / FOC Invoice/Export Invoice | Sale / Testing / Scheme/Export |                           |              |
| 3       | Inter Branch transfer               | Stock Transfers                |                           |              |
| 4       | Vendors Returns                     | Defective                      |                           |              |
|         | <b>Return From customer to 3PL</b>  |                                |                           |              |
| 1       | Receipts Sales Return               | Returns                        | YES                       | YES          |
| 2       | Receipts of Defective               | Defective                      |                           |              |

# OSRAM Lighting Private Limited


## Standard Operating Procedure (SOP)

### Inbound (Material Receipts)

#### Inbound flow Chart:

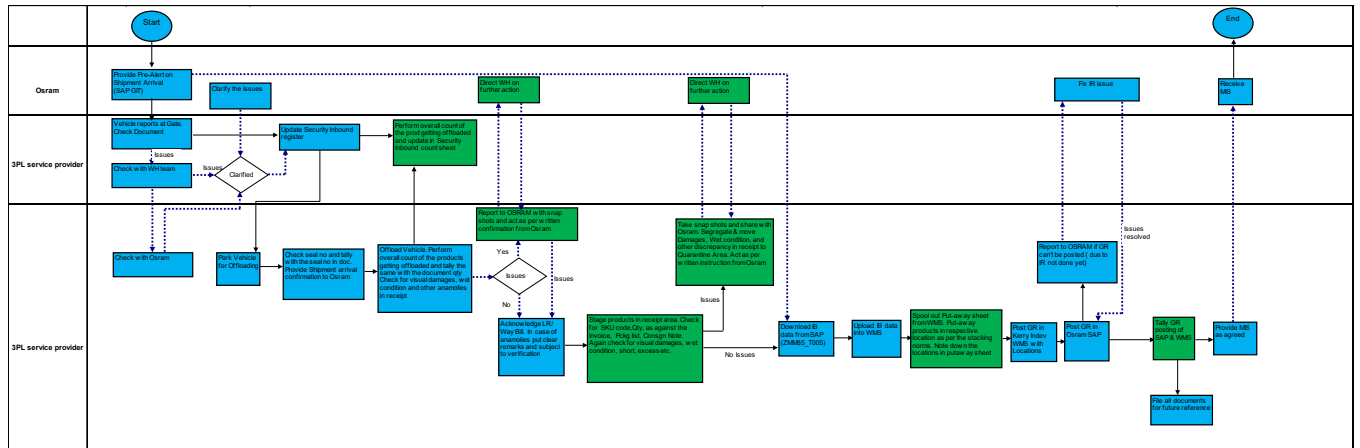


#### Full view (Zoom view given below in two parts)

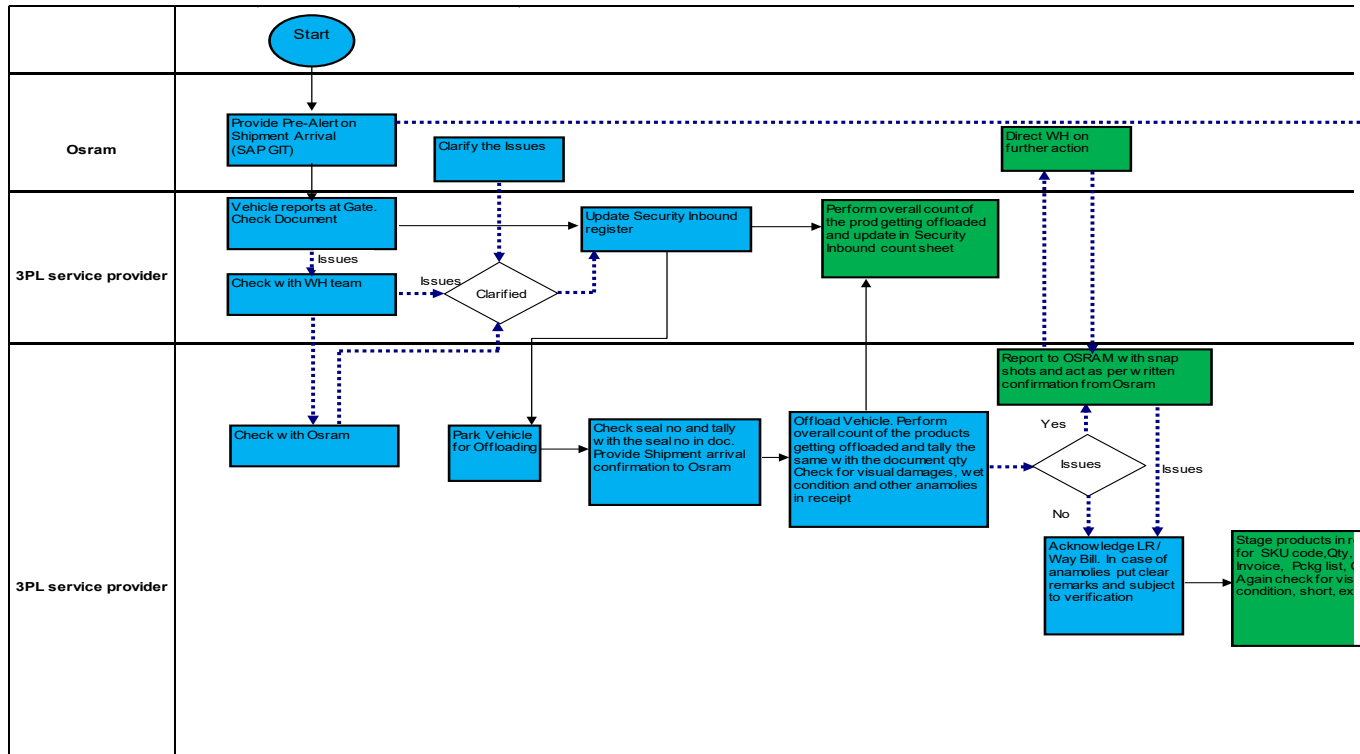

#### Zoom view (Part-1)

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

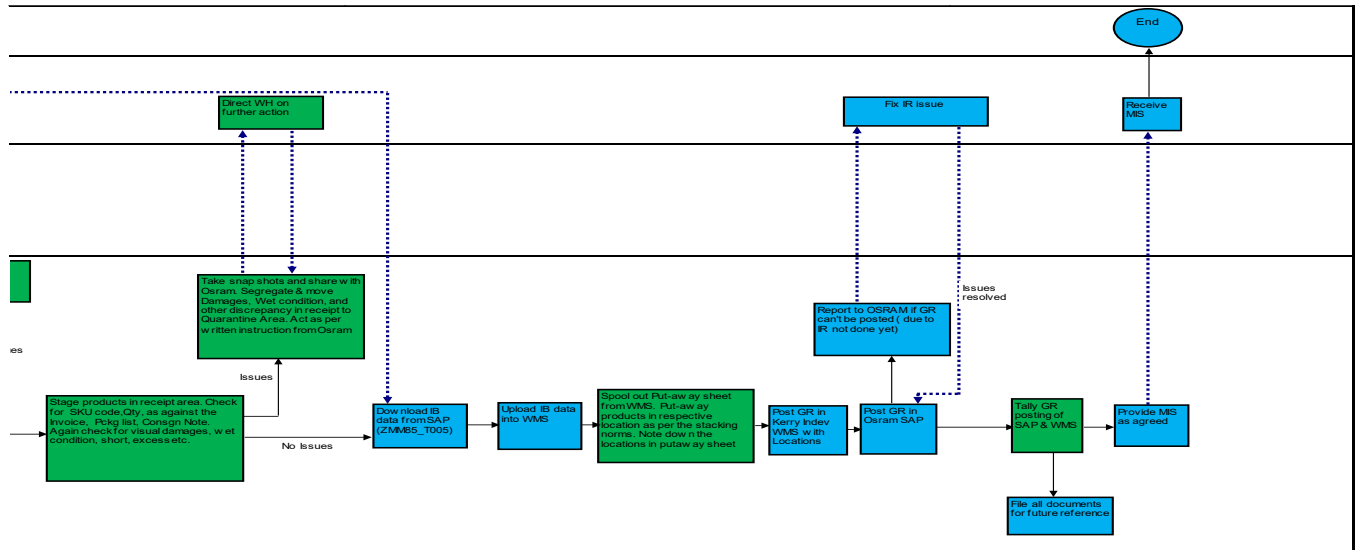

### Zoom view (Part-2)

OSRAM is responsible for collaborative planning, stock level optimization, placing order and inventory replenishment. The frequency and shipping method are determined by OSRAM. Shipments are to be cleared and moved to 3PL warehouse.

#### ■ Physical material Receipts Processes from Imports

- Import Consignment are cleared by CHA (Custom House Agent) appointed by the company to clear the consignment received from different Locations like – Germany, Indonesia, China & Dubai etc.
- CHA sends intimation to Concerned Person in Custom Clearance Department at OSRAM H.O.
- Concern Person inform to PDCS about the Shipment Arrival along with necessary details.
- When truck is reported at PDCS following initial checks have to be conducted.
  - Check the Original & Duplicate copy of challan
  - Check the Purchase Order number
  - Check the Bill of Lading/Bill of Entry / Invoice
  - Declaration Forms / E-Waybill, wherever applicable
  - Any other instruction along with the copy of invoice.
- Enter the details of the truck in the Manual Inward Register maintained at warehouse.
- 3PL will arrange unload of material and tallying Material with documents V/S physically within required timeline.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Prepare the unloading report for discrepancies
- Sign off the Receipts with signature, date and time point, and chop with 3PL stamp after. Handover acknowledgement to transporter if any Short / breakage / Damage Remarks to be given on acknowledgement document to transporter.
- And any change in shipment needs to be updated to OSRAM.
- In case, any Short/Excess material received, the same need to be highlighted to OSRAM through written communication and GR to be done for all the invoice quantity. OSRAM will later adjust the short and Excess material through system adjustment.
- Any quality issue must be recorded and reported to OSRAM, with related goods putting-away in block area physically and in system, which needs to follow related exceptional handling process.
- 3PL will inform concern person in LOGISTICS at H.O. to process for MIRO for Imports Material
- Responsible Person in H.O. will do MIRO and will inform to 3PL to post GR in SAP
- After confirmation from OSRAM H.O. 3PL will post GR in SAP based on IB to update inventory

Based on GR details placement team will place the physical material to Storage location product wise

### ■ **Physical material Receipts Processes from Local Vendor**

- Local Vendors are those who manufacture the goods for OSRAM. Local Vendor will supply the material to OSRAM Based on Purchase Order it may be to PDCS or to other WH as per delivery address in Purchase order.
- On arrival of material from local vendor at the PDCS following initial checks have to be conducted.
  - Check the Tax Invoice / Delivery Challan
  - Check the Purchase Order number
  - Check GST No. of the Consignee & Consignor
  - Declaration Forms / E-Waybill, wherever applicable

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Check Inbound Number (IB)
- Any other instruction along with the copy of Tax Invoice.
- Enter the details of the truck in the Manual Inward Register maintained at warehouse.
- 3PL will arrange unload of material and tallying Material with documents V/S physically within required timeline.
- Prepare the unloading report for discrepancies
- Sign off the Receipts with signature, date and time point, and chop with 3PL stamp after. Handover acknowledgement to transporter if any Short / breakage / Damage Remarks to be given on acknowledgement document to transporter.
- And any change in shipment needs to be updated to OSRAM.
- Partial inbound confirmation will be done only with the actual received quantity, which needs to follow related exceptional handling process.
- Any quality issue must be recorded and reported to OSRAM, with related goods putting-away in block area physically and in system, which needs to follow related exceptional handling process.
- After confirmation from OSRAM H.O. 3PL will post GR in SAP based on IB to update inventory
- 3PL will inform concern person in LOGISTICS at H.O. to process for MIRO or IR.

Based on GR details placement team will place the physical material to Storage location product wise

- **Physical material Receipts Processes from PDC to SDC & Vice-Versa**
  - Carrier or transporter will report to 3PL to deliver the shipment
  - 3PL will get inbound related documents along with shipments. After checking and ensured all required complete document is attached along with shipment as below.
    - Check the P.O. number/Inbound no.
    - Original & Transport copy of Stock Transfer Invoice / Delivery Challan
    - Declaration Forms / E-Waybill, wherever applicable

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Any other instruction along with the copy of invoice.
- Enter the details of the truck in the Manual Inward Register maintained at warehouse.
- 3PL will arrange unload of material and tallying Material with documents V/S physically within required timeline.
- Prepare the unloading report for discrepancies
- Sign off the Receipts with signature, date and time point, and chop with 3PL stamp after. Handover acknowledgement to transporter if any Short / breakage / Damage Remarks to be given on acknowledgement document to transporter.
- And any change in shipment needs to be updated to OSRAM.
- Partial inbound confirmation will be done only with the actual received quantity, which needs to follow related exceptional handling process.
- Any quality issue must be recorded and reported to OSRAM, with related goods putting-away in block area physically and in system, which needs to follow related exceptional handling process.
- After completion of physical material receipts 3PL will post GR in SAP based on IB to update inventory

Based on GR details placement team will place the physical material to Storage location product wise.

### ■ Operation guideline

- 3PL coordinates and works with OSRAM to ensure of inbound being done with the time scope agreed by OSRAM and 3PL
- Inbound process completing lead time is depending on volume of shipment it will be vary WH to WH or 1 working day (from the point of documentation receipts along with shipment to the point of goods available in SAP).
- All containers condition shall be visually checked and ensure of seal being intact. (Photos must be taken before breaking the seal with the container number)
- Upon unloading of container, photos and unloading report should be used for tallying. All


# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

products shall be placed on wooded pallets for storage and ensure stacking limit is adhere at all time. And make sure that all stacking must follow OSRAM Policies & guidelines.

- In the event of discrepancy / goods damage during unloading, refer to exception handling process.
- All products shall be handled with proper facilities/equipment, were ever is required this will be very WH to WH such pallet jack, reach truck or forklift. Any goods damaged happened while inbound receiving is not acceptable.
- Monthly report for inbound delivery shipment actual arrival date is required.
- All inbound unloading and sorting must be monitored under Securities personal as well as WH Concern person or supervisor and related record is required to be kept in records.

### Outbound Flowchart

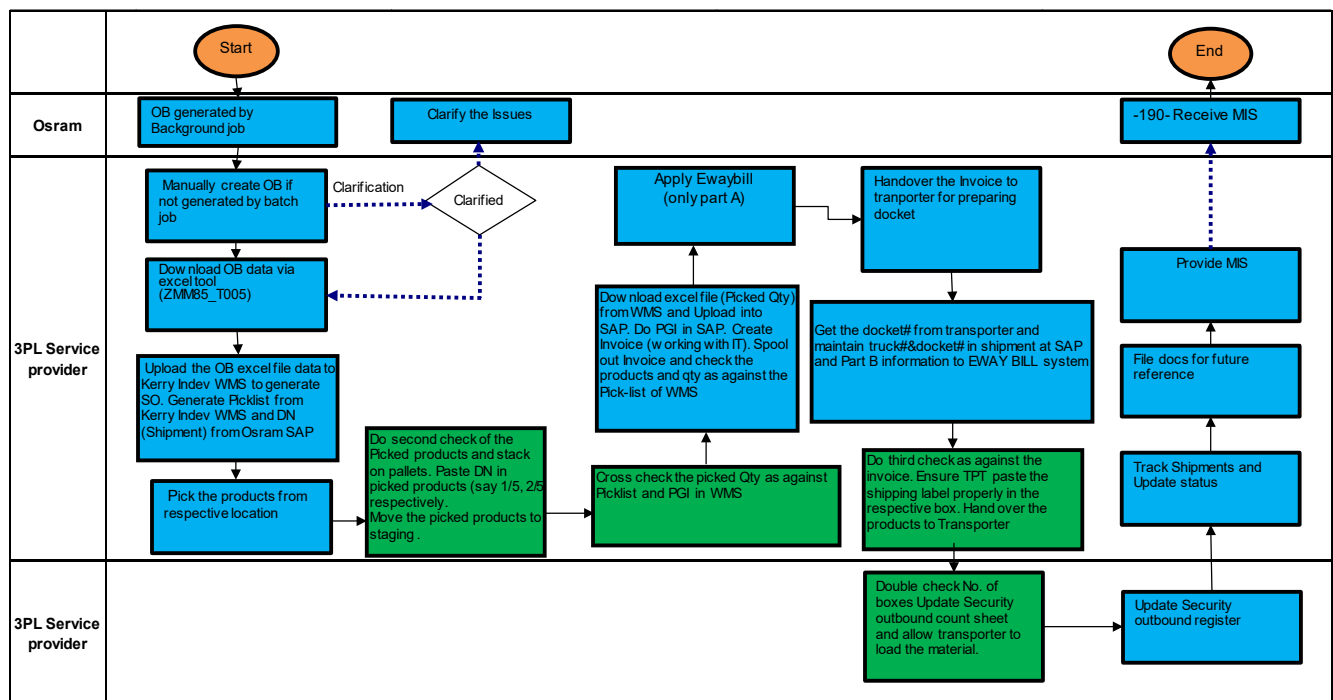

## 2. Outbound (Material Dispatch)-

We have Process out bound two types in sap system, first is Manual Process & second excel tool download & upload Process.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### Outbound manual Process:

- Below given billing or invoice creation Process being done at 3PL WH
- For Invoice creation there are 6 steps to follow.
- Order Creation by Sales
- Credit Release by Credit control Department
- Auto OB Creation / Delivery Creation by WH
- Post Goods Issue done by WH
- E-Waybill Data Upload to GSP Portal

### E-Waybill Data Download from GSP Portal

- E-Waybill Data Upload To SAP
- Printing of invoice in 3PL WH
- Dispatch the Material as per the Invoice

| Order -> Credit Release -> Delivery -> P.G.I. -> Billing->E-Waybill Generation -> Print |                         |            |                                                                                                                     |
|-----------------------------------------------------------------------------------------|-------------------------|------------|---------------------------------------------------------------------------------------------------------------------|
| Descriptions                                                                            | T-Codes                 | T-Codes    | Remarks                                                                                                             |
|                                                                                         | SINGLE                  | COLLECTIVE |                                                                                                                     |
| Order Entry                                                                             | VA01                    |            |                                                                                                                     |
| Credit Release                                                                          | VKM4                    |            |                                                                                                                     |
| Delivery Creation                                                                       | Auto OB Creation/VL 10I | Batch Run  | Soft Allocation of Materials, is done by the system, after checking availability of the Material (i.e. Book Stocks) |
| Delivery Confirmation                                                                   | VL02N                   | VL06P      |                                                                                                                     |
| Shipment Creation                                                                       | VT01N                   |            |                                                                                                                     |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

|                           |                                  |      |                                      |
|---------------------------|----------------------------------|------|--------------------------------------|
| Shipment Completion & PGI | VT02N                            |      | System Stocks Will Be Reduced        |
| E-Waybill Generation      | ZLE85_T20<br>0<br>/<br>ZLE85_210 |      | E-Waybill Generated via GSP Portal   |
| Invoice Printing          | VF03                             | VF31 | Invoices Printed with E-Waybill Nos. |

- An Invoice contains the following information which 3PL need to be check immediate after printing
  - Customer Code, name and address
  - Shipped WH Name & address
  - Invoice No. and date
  - Sold to Customer Name and Ship to Customer Name and Address
  - GST. No. of the Consignee - this is a legal requirement
  - Product -wise details
  - Product Name, IC Code, EAN Code
  - No. of Packages / Weight/Volume
  - Quantity in nos.
  - Unit Rate & Total Amount
  - Tax Rate as applicable

Invoice should be having 3 copies (Original, duplicate, Triplicate)

- **Outbound (Customer Billing)**
  - Once the Outbound Delivery is Received and picklist is printed by 3PL material picking will be done by picking team
  - Physical material will be kept in outward bay

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Dispatch team of 3PL will check the material
- Picking will be confirmed in SAP and PGI will be done
- E-Waybill data download and upload (Post E-Waybill Generation)
- Invoice Printing is done
  - 3PL will arrange Loading of material in truck.
- Fill up the Transporter LR with all details – like (Consigner Name, Consignee Name, and Invoice No. & Date – Mention all Invoice if more than one Invoice, Value of Invoice – Mention consolidated value of Invoices if more than one Invoice, Description of Material, No. of packages, Paid basis, To Pay Basis or To be Billed Basis )
- At last make an entry in Manual dispatch register as maintained in the branch by 3PL
- Transporter will carry 2 copies of Invoice – one for customer and second copy for customer acknowledgment.
- Once the customer receives the material and give the receiving on the second copy of the invoice or Docket copy, 3PL will ensure that the following procedure is followed by the transporter.
  - Signature on the Invoice/Docket
  - Acknowledgement Stamp
  - Date of Receiving of the Material
  - Time of Receiving of the Material
- 3PL will keep records of POD (Soft copy & Hard copy) serially month wise. And the same to be submitted to OSRAM whenever it is required
- **Outbound (FOC / Sample invoice)**
- Once the Outbound Delivery is created by Warehouse SAP Operator and picklist is printed by 3PL material picking will be done by picking team

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Physical material will be kept in outward bay
- Dispatch team of 3PL will check the material
- Picking will be confirmed in SAP and PGI will be done
- E-Waybill data download and upload (Post E-Waybill Generation)
- Invoice Printing is done
- 3PL will arrange loading of material in truck
- Fill up the Transporter LR with all details – like (Consigner Name, Consignee Name, and Invoice No. & Date – Mention all Invoice if more than one Invoice, Value of Invoice – Mention consolidated value of Invoices if more than one Invoice, Description of Material, No. of packages, Paid basis, To Pay Basis or To be Billed Basis )
- At last make an entry in Manual dispatch register as maintained in the branch by 3PL.
- Transporter will carry 2 copies of Invoice – one for customer and second copy for customer acknowledgment.
- Once the customer receives the material and give the receiving on the second copy of the invoice or Docket copy, 3PL will ensure that the following procedure is followed by the transporter.
  - Signature on the Invoice/Docket
  - Acknowledgement Stamp
  - Date of Receiving of the Material
  - Time of Receiving of the Material
- 3PL will keep records of POD (Soft copy & Hard copy) serially month wise. And the same to be submitted to OSRAM whenever it is required

If any problem in dispatch of invoice material 3PL has to inform LOGISTICS H.O. within 24 hours from the time of invoice received for dispatch.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

| YUB STO-> Delivery -> P.G.I. -> Billing->E-Waybill Generation -> Print |                                  |            |                                                     |
|------------------------------------------------------------------------|----------------------------------|------------|-----------------------------------------------------|
| Descriptions                                                           | T-Codes                          | T-Codes    | Remarks                                             |
|                                                                        | SINGLE                           | COLLECTIVE |                                                     |
| STO Creation                                                           | ME21n                            |            | By BU SCP                                           |
| Delivery Creation                                                      | VL10D                            | VL10D      |                                                     |
| Delivery Confirmation                                                  | VL02N                            |            |                                                     |
| Shipment Creation                                                      | VT01N                            |            |                                                     |
| Shipment Completion & PGI                                              | VT02N                            |            | System Stocks Will Be Reduced                       |
| E-Waybill Generation                                                   | ZLE85_T20<br>0<br>/<br>ZLE85_210 |            | E-Waybill Generated via GSP Portal                  |
| Invoice Printing                                                       | VF03                             | VF31       | Stock Transfer Invoices Printed with E-Waybill Nos. |

- **Outbound (Inter Branch Transfer - Stock Transfer Invoice)**
- Primary Distribution Planning is being done at H.O by SCP team.
- Stock Transfer order punched in SAP from H.O.
- Planning & arranging of Vehicle for transportation of material is being done by 3PL.
- At 3PL checks and execute the STO into out bound delivery.
- 3PL will pull pick list for picking of material form WH and will kept in outward staging area.
- Dispatch team will tally physical material V/s Pick list
- Nominated transporter vehicle will report at 3PL
- Examine of vehicle will be done by 3PL
- Loading of vehicle will be done.
- After loading of vehicle 3PL will convert out bound Delivery/ pick list into IBT.
- E-Waybill data download and upload (Post E-Waybill Generation)

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- 3PL prints IBT from SAP and transit document will be prepare
- Material will be handover to Transporter and take booking receipts document LR / Docket with Transporter signature a proof of booking.
- At last make an entry in Manual dispatch register as maintained in the branch by 3PL
- 3PL will keep records of POD serially month wise.
- **Operation guidelines**
  - FIFO is required based on products physical GR date.
  - Cut-Offs time is 01:00 pm to consider all released sales order/STO/OBs for same day execution.
  - Local delivery is to be delivered to customer same day for Sales orders released up to 1 PM.
  - All OB's created after 01:00 pm execution must happen by next working day. However urgent cases may be dealt on best effort basis in-line with instructions from HO Logistics.
  - In general, goods outgoing type from 3PL will be in original packing, and other small volume material must be re-packed.
  - 3PL must ensure truck or container loading safely.
  - 3PL has to bring the goods at the specified area outward bay for the Transporter / Forwarder to check.
  - 3PL has to witness the handover of goods to Transporter / Forwarder
  - No temporary storage after GI against customer request is allowed, unless written approval from OSRAM is available.
  - No delivery could be made without OSRAM Stock Transport Invoice / Delivery Challan / Customer Tax Invoice.
  - Shipment Releasing Approval Sheet or gate pass is required to driver to show to the gate guard, which is approved by OSRAM or 3PL.
  - Daily outbound delivery report is required (Report data at least includes invoices no or IBT,

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Customer #, IC#, QTY and exceptional case remark)

- All outbound loading must be done under supervision of CCTV if possible or personal securities and related video record is required to keep in records or manual record register.

### 3. Inbound/Outbound Automated Process (Bulk upload through Excel Tool)

Background:

OIN uses excel file tool (ZMM85\_T005) to complete picking confirmation and PGI function, but for shipment function, need to be manually created and manually completed. They request to include the shipment creation

and completion at excel file tool, thus ZMM85\_T005N is developed for this purpose.

Inbound function is same as ZMM85\_T005.

Outbound download function change to:

ZMM85\_T005: upload OB -> picking + PGI via  
zmm85\_t005 -> shipment manual creation

ZMM85\_T005N: upload OB -> picking + shipment  
creation/completion (including PGI+Billing)

Plant / shipping point scope of this transaction (other plant/shipping point is not applicable:

D960 (Gurgaon) – D960 / D962

D987 (Mumbai) – D987/ D990




**Screen: Initial screen**

Choose if you want to download or upload a file

The screenshot displays the 'File Exchange Service Provider' window. It features a title bar with a green checkmark icon. Below the title bar, there is a section for 'Document type' with two radio button options: 'Inbound delivery' and 'Outbound delivery'. The 'Outbound delivery' option is selected, indicated by a blue dot and a red bracket. Below this, there is a section for 'Download/Upload' with two radio button options: 'Download' and 'Upload'. The 'Download' option is selected, indicated by a blue dot.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)
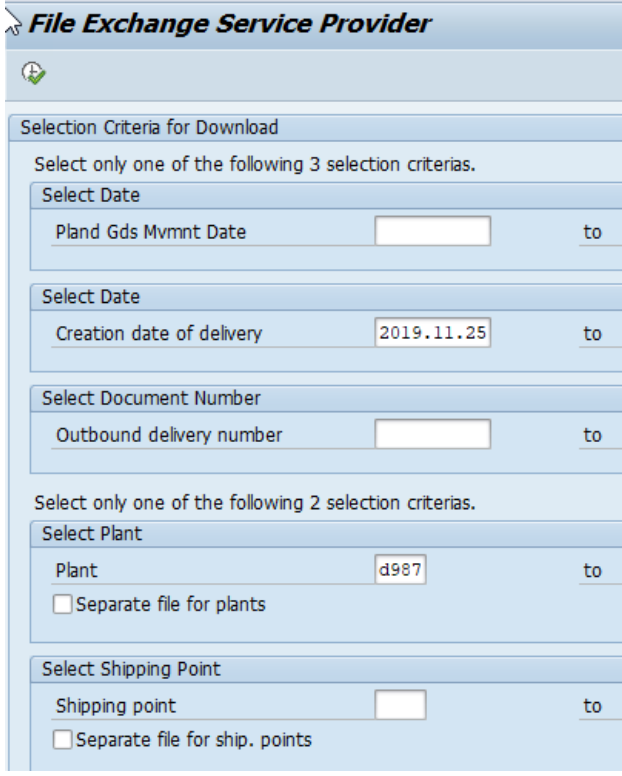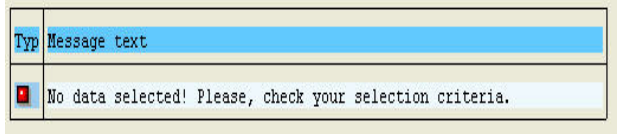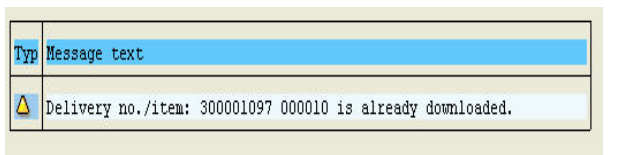
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Screen: File exchange service provider - DOWNLOAD</b></p> <p>Enter the planned goods movement date – either a single date or a range of dates.</p> <p>Select EITHER plant OR shipping point. If you enter the plant the program selects all possible shipping points automatically.</p> <p>The shipping point(s) you enter must be in the list maintained in ZMOD.</p> <p>The plant(s) you enter must be in table TVSWZ, which is also relevant to ZMOD.</p> <p>If you enter a range of plants or shipping points, select “separate file for plants” (or shipping points) as well.</p> |  <p><b>File Exchange Service Provider</b></p> <p>Selection Criteria for Download</p> <p>Select only one of the following 3 selection criterias.</p> <p>Select Date</p> <p>Plant Gds Mvmnt Date <input type="text"/> to</p> <p>Select Date</p> <p>Creation date of delivery <input type="text" value="2019.11.25"/> to</p> <p>Select Document Number</p> <p>Outbound delivery number <input type="text"/> to</p> <p>Select only one of the following 2 selection criterias.</p> <p>Select Plant</p> <p>Plant <input type="text" value="d987"/> to</p> <p><input type="checkbox"/> Separate file for plants</p> <p>Select Shipping Point</p> <p>Shipping point <input type="text"/> to</p> <p><input type="checkbox"/> Separate file for ship. points</p> |
| <p><b>Screen: File exchange service provider - DOWNLOAD</b></p> <p>If you get this message, no delivery fit into your selections.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  <p>Typ Message text</p> <p>No data selected! Please, check your selection criteria.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <p><b>Screen: File exchange service provider - DOWNLOAD</b></p> <p>If you get this warning message, the displayed delivery was already downloaded. It will not be in the downloaded file again.</p>                                                                                                                                                                                                                                                                                                                                                                                          |  <p>Typ Message text</p> <p>Delivery no./item: 300001097 000010 is already downloaded.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

The file will be created in path C:/.

The file name consists of the plant number / shipping point and the actual date + counter, i.e.

D987\_20040807\_01.xls

**Warning: Do not double-click on the downloaded file to open it!**

**Always start Excel first, then use “open file” to do it! Otherwise, any local language characters can not be displayed!**

Attention:

User need to fill up Forwarding agent, Container ID, Description, FA tracking ID during manually creating shipment. These 4 data to be manually maintained at outbound excel file tool from column Q-T.

Then when upload the excel file, shipment can also be created, and the 4 data be maintained at the following SAP fields.

D800\_20040722\_01.xls  
D800\_20040726\_01.xls  
D800\_20040728\_01.xls  
D801\_20040721\_01.xls  
D801\_20040721\_02.xls  
D802\_20040721\_01.xls  
D811\_20040721\_01.xls  
D811\_20040721\_02.xls  
D811\_20040722\_01.xls  
D811\_20040722\_02.xls  
D811\_20040722\_03.xls

|                             |                  |
|-----------------------------|------------------|
| Customer Purchase Order No. | Forwarding agent |
| Customer Part No.           | Container ID     |
| Header Text                 | Description      |

| Q                       | R                 | S               | T                 |
|-------------------------|-------------------|-----------------|-------------------|
| Customer Purchase Order | Customer Part No. | Header Text     | Item Text         |
| 99013012 Truck#123      |                   | Road permit#123 | Lorry receipt#123 |
| 99013012 Truck#123      |                   | Road permit#123 | Lorry receipt#123 |
| 99013012 Truck#123      |                   | Road permit#123 | Lorry receipt#123 |

**Screen: Initial screen**

Choose if you want to download or upload a file.

**File Exchange Service Provider**



Document type

☐ Inbound delivery

☒ Outbound delivery

Download/Upload

☐ Download


☒ Upload

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### Screen: File exchange service provider - UPLOAD

Select path and file name to upload the file.

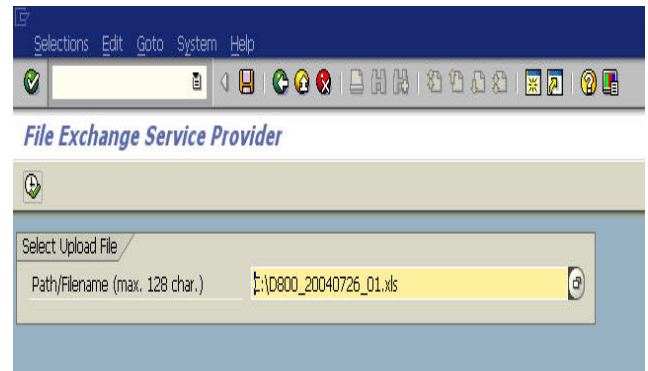

#### 4. Value Added Services

3PL will carry out value added services as defined in contract.

In case of VAS not defined in contract, 3PL will take prior approval of rates from Logistech Head.

#### 5. Handling of Excess/ Shortage/ Breakage

Handling processes are used to manage unexpected events during daily operations, which ensure related processes to be executed properly, timely and accurately. OSRAM and 3PL have defined these exceptional cases listed below:

- Goods short landing found during inbound.
- Goods damage found during inbound
- Damaged goods found during daily operation
- Inventory discrepancy found during daily operation
- Inventory discrepancy – wrong IC# for one product while inbound
- Return from customer to 3PL
- Return from 3PL to vendor
- Scraping (to be showed in 3PL working instruction)
- Operation guidelines: Photos are required for goods damage case for evidence.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 5.1. Goods discrepancy found during inbound

- 3PL need to report to OSRAM about this exceptional case, just keep record actual received quantity into SAP.
- Goods discrepancy is found when 3PL checks inbound goods according to inbound delivery documents.
- Confirm the inbound delivery in system as per actual received quantity. For example: inbound delivery states 100 pcs of item A, but physically only received 90 pcs. Then 3PL confirms the inbound quantity of item A with 90 pcs.

### 5.2. Goods damage found during inbound

- 3PL informs immediately the supervisor & OSRAM and quarantines the cargo.
- 3PL treats such a case as follows: (for example)
  - Inbound delivery indicates 100 pcs for one IC#, among which 90 pcs is good and 10 pcs in damaged.
  - Inbound delivery confirmation should be separated into 2 lines:
    - 1<sup>st</sup> line is for 90 pcs to be put-away to unrestricted area.
    - 2<sup>nd</sup> line is for 10 pcs to be put-away to block area.
- 3PL moves the damage good to the block area physically.
- 3PL reports to OSRAM by email.
- 3PL does goods movement in SAP in block.
- OSRAM LOGISTICS will check with vendor / consignor / transporter and feedback appropriate instruction to 3PL
- If scrap is required by OSRAM, OSRAM LOGISTICS will process the same as per the OSRAM scrap policy
- OSRAM LOGISTICS needs to give feedback related instruction to 3PL within 24 hours.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 5.3. Goods damage found during daily operation Goods on the shelf)

- 3PL person informs immediately the supervisor, quarantines the cargo, and informs OSRAM once damage product is found.
- 3PL does goods movement in SAP in block.
- 3PL put damaged goods to block area physically and reports to OSRAM by email.
- OSRAM quality department is reported with this case and feedback scrap instruction to 3PL.
- If scrap is required by OSRAM quality department, OSRAM LOGISTICS will process the same as per the OSRAM scrap policy

Operation guidelines for all goods movement case: Goods movement can only be done based on OSRAM material documentation, which is created in SAP either OSRAM or 3PL

### 5.4. Inventory discrepancy found during daily operation

- Such cases happened during daily operation comparing the balance of goods inventory in SAP and Physically
- 3PL has to do the 1<sup>st</sup> step of investigation by checking the stock transaction list for error.
- Once shortage is confirmed based on checking, 3PL has to report to OSRAM with complete explanations by email.
- OSRAM does inventory adjustment in SAP and charge 3PL for the discrepancy (as agreed in contract).

### 5.5. Inventory discrepancy --- Wrong IC# for one product while inbound

- Such cases could be happened during inbound receiving based on inbound delivery.
- 3PL treats such a case as follows: (for example)
  - Inbound delivery indicates 100 pcs for one IC A. Actual quantity received is 90 pcs of IC A and 10 pcs of IC B.
- Inbound GR quantity confirmation for IC A should be “90”

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- 3PL reports to OSRAM with above information by email before put away in system.
- OSRAM LOGISTICS feedback related instruction to 3PL with two options:
  - OSRAM LOGISTICS creates a new order line for IC#B for its GR, based on which BU follows the inbound delivery process.
  - OSRAM LOGISTICS feedback return instruction, based on which 3PL is in charge of return process for IC#B to consignor.
- 3PL confirms this new inbound delivery into SAP.
- OSRAM reports to customs with the discrepancy for approval to adjust the record in customs. in case of imported goods.

### 6. Return from Customer to 3PL

#### 6.1. Defectives Return

- OSRAM LOGISTICS notifies 3PL the returning case.
- 3PL will receive goods, only if OSRAM quality department defective report (DCR) is attached along with defective return shipment. DCR copy must be mention on customer name, IC code, IC description & qty etc.
- 3PL will GR or posts Defective Return in SAP based on Osram team provide Inbound no. in sap system.
- 3PL will create goods movement documentation in SAP based on quality result, and posts documentation in SAP, and accordingly physical put away segregation will be done same time vendor wise.
- If scrap is required by OSRAM quality department, OSRAM LOGISTICS will process the same as per the OSRAM scrap policy.

#### 6.2. Sales Return

- OSRAM LOGISTICS notifies 3PL or 3PL notifies OSRAM LOGISTICS the return case
- 3PL receives goods and will judge and check physically if material is in original packing and

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

saleable if suspicious inform to LOGISTICS to arrange quality inspection LOGISTICS will coordinate with OSRAM quality department to check Sales return material quality. based on the quality 3PL will process in SAP.

- 3PL will receive sale return Invoice based on GST norms, if customer received shipment then they refused due to certain reason, after that this sales return must attached with customer Invoice copy with reference of Osram invoice no.
- 3PL will GR or posts Sales Return in SAP upon receipt of Return Order from OSRAM.
- 3PL will create goods movement documentation in SAP based on quality result, and posts documentation in SAP, and accordingly physical put away.
- If scrap is required by OSRAM quality department, OSRAM LOGISTICS will process the same as per the OSRAM scrap policy.

### 6.3. Delivery return (If shipment undelivered and returned to Warehouse)

- 3PL has to provide the reason to OSRAM regarding the undelivered shipment
- 3PL will take confirmation from OSRAM for Rebooking of the shipment
- Once the confirmation received, 3PL need to call back the shipment to warehouse
- Once the shipment reaches warehouse 3PL need to check the material physically and confirm whether salable or not.
- OSRAM will provide the Sales Return number and warehouse will process the GR based on the Sales Return (Inbound) number.

### 6.4. Return to vendor:

- OSRAM LOGISTICS notifies 3PL the returning case
- OSRAM LOGISTICS report to OSRAM purchase and get the instruction of return from purchase.
- OSRAM LOGISTICS will process in SAP outbound delivery for returning and notifies 3PL to post it.
- 3PL return goods following outbound delivery process.
- 3PL need to follow the billing process once the billing done 3PL need to take the printout SAP debit note using the SAP T code: **ZFI85\_T119**

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- OSRAM Accounts process for debit note release to Vendor & inform to purchase and LOGISTICS
- 3PL follow Return process and keep related document.
- If we will dispatch material to Vendor for job work purpose on manual delivery challan, then we will move goods in sap **stock Provided vendor location** by SAP movement 541 & after job work shipment receipt in warehouse then we will move this material in sap by movement type 542. Delivery challan copy attached for reference purpose.



Microsoft Excel  
97-2003 Worksheet

### 7. Inventory management

- **Stock taking Processes**
  - OSRAM notifies 3PL the stock taking time.
  - 3PL prints the stock taking sheet and counts stock.
  - 3PL sends the stock taking report to OSRAM after double checking the discrepancy.
  - 3PL provides detail explanation for any discrepancy.
  - If any discrepancy, related exceptional handling process needs to be followed.
- **Operation guidelines**
  - OSRAM notify 3PL the stock taking time by email.
  - Stock taking need to be done without any operation done in warehouse.
  - Stock taking need to be done with OSRAM's supervision.
  - Any discrepancy needs to report to OSRAM by e-mail.
  - Disaster recovery plan / contingency plan are required for warehousing and operation.
  - Annual stock taking target: inventory accuracy ratio is 99.99%.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### ■ Inventory control

- 3PL need to run daily inventory report for daily inventory control for self.
- 3PL need process daily cycle count for their internal controls.
- 3PL process the cycle counting and report to OSRAM monthly basis.
- 3PL provides stock aging report monthly if possible or facilitated reports in OSRAM SAP
- Stock Surveillance / Monitoring is required, and related records are required to be stored.

### 8. Reports from 3PL to OSRAM

The following reports are required from 3PL:

- Daily Reports:
  - Logbook
  - Open issues report
- Monthly Reports
  - Performance Report
  - Transport KPI
  - Warehouse KPI
  - Customer Complaint data
  - Monthly inventory SAP vs WMS vs Physical
  - Monthly provision for Warehouse and transportation bill (1<sup>st</sup> working day of every month)
  - MIS for warehousing bill
  - MIS for transportation freight

### 9. Documentation

The following documents are required to be kept for 5 year:

- Inbound Delivery Notes signed by 3PL
- The set of documents of inbound customs declaration including vendor import/ export invoice.
- 3PL list signed by Supervisor for goods receiving checking
- Picking List / Packing List
- The set of documents of outbound sales tax declaration
- Outbound Delivery Note signed by 3PL and Transporter
- Exceptional case report applied by 3PL and approved by OSRAM

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Monthly cycle counting list signed by OSRAM and 3PL
- Annual stock taking list signed by OSRAM and 3PL

3PL is responsible for filing those above documents for 5 years, and then handover to OSRAM every 5 years.

### 10. PDC Performance:

Performance Distribution Centre (PDC)

3PL has to ensure the Goods are issued as per SAP Planned Good Issue Date, any deviation in the same has to be informed to OSRAM Logistics and an approval is to be availed from Head – Logistics in such cases The SAP Planned Goods Issue Date can be tracked and monitored by Open OB Report VL06O.

### 11. Insurance claim

- OSRAM will ensure all OSRAM Goods under its All Risk policy (transit + storage of goods in warehouse) excluding undetected losses and pillage.
- If 3PL found any Discrepancies, at the time of Inward / goods receipts remarks are to be noted down on the LR/ Docket / Waybill of Transporter Service Providers. (i.e. if there are any Shortages / Breakages)
- Transporter is not liable to pay any claim, if the details of the Shortages / Damages, not written on the 'acknowledgement' given to the transporter In that case, OSRAM will recover same amount from 3PL
- Service Provider shall also maintain at its own cost any additional insurance required by applicable laws, rules and regulations governing the country wherein the warehouse is located for the Term of this Agreement.
- Service Provider may take insurance coverage with a reputable insurance company on stock variances to the extent that Service Provider may deem necessary and appropriate.
- Service Provider shall deliver to OSRAM, upon OSRAM request, certificates of insurance as evidence of maintenance of the required coverage and OSRAM as an additional insured. All policies shall provide that such coverage under these policies shall not be cancelled or materially changed without at least thirty (30) days prior written notice to OSRAM.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- The cancellation or termination of this Agreement by either Party hereto shall not affect the insurance coverage for losses occurring during the Term of this Agreement.

### Damage claim Assessment Process

- During shipment of Finished Goods, material may damage in transit. This may happen for various reasons like improper loading, bad condition of vehicle, rash driving, poor condition of roads, overloading, transshipment, poor quality of packing materials etc.
- Based on reasons for all shortages/breakages/lost material reported at the receiving location as per assessment of receiving location, Insurance Claim has to be filed.
- 3PL has to send the entire document to OSRAM H.O. in LOGISTICS to responsible person who take care of Insurance matter.

## 12. Scope of Warehouse Agreement

The Parties have agreed that OSRAM will procure from Service Provider, and Service Provider will provide OSRAM with certain warehousing facility to store OSRAM's goods and products ("OSRAM Goods") and will also provide certain related services for OSRAM Goods under the terms and conditions of this Agreement.

## 13. Service Provider's General Responsibility

OSRAM Goods stored in the Warehouse are at all time under the care, control and sole responsibility of Service Provider regardless of whether there is any fault found on Service Provider's side, provided that Service Provider shall not be liable for any damages or shortages in the following situations:

- (1) if the damages or shortages are caused by a Force Majeure event
- (2) if the damages or shortage are caused by OSRAM's fault;
- (3) if Service Provider can provide a police report or other proof (mutually acceptable by both OSRAM & Service Provider) showing that the damages or shortages are caused by a third party;
- (4) If the shortage is caused by unknown or undetected reasons and such shortage is within the monthly acceptance level (i.e. 0.01% of total stock value) as permitted under Agreement.

"Stored at the Warehouse" shall mean the period from the time when OSRAM Goods are checked into the Warehouse until the same OSRAM Goods are collected at the Warehouse by

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

OSRAM's representatives, customers, vendors, other warehouse service providers, forwarders or other entities/persons designated by OSRAM ("OSRAM Designees") following procedures described in Standard Operating Procedures ("SOP")

No specific obligation of this Agreement is intended to restrict in any way the generality of Service Provider's responsibility described in this Article 2. When OSRAM Goods stored in the Warehouse are missing or damaged for any reason, Service Provider cannot raise satisfactory performance of all the specific obligations or Services Tasks to avoid liabilities, unless it falls within one of the four (4) situations described in the first paragraph of this Article 15.

### 14. Service Provider's Responsibilities

Without restricting the generality of, Service Provider undertakes the following:

#### 14.1 Warehouse

OSRAM Goods shall be stored at the warehouse facility which is owned and operated or otherwise legally operated by Service Provider, or any other duly licensed warehouse(s) operated by Service Provider to be mutually agreed upon by the Parties in writing ("Warehouse").

Service Provider shall ensure that the Warehouse will protect OSRAM Goods from the elements of nature and any/or any other effects such as contamination or pollution. The Warehouse shall be clean, enclosed, sheltered and safeguarded against damage from weather, improper storage, pilferage and theft, etc. The other conditions of the Warehouse shall be no

worse than the customary conditions of warehouses in the international warehousing industry for storing the types of goods as OSRAM Goods.

Service Provider shall ensure that the Warehouse satisfies the following conditions, unless any deviations from such conditions are notified to and approved by OSRAM before OSRAM Goods are stored at the Warehouse:

- i. Min. Floor loading capacity: 3,000 kg/m<sup>2</sup>
- ii. Separate receiving/ shipping docks available
- iii. Lighting intensity: 280 ~ 300 lux
- iv. Fire Safety system available
- v. Emergency lighting available

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- vi. CCTV.
- vii. Security staffing available
- viii. Access control available

### 14.2 Operating System

Service Provider shall deploy and maintain a proper and effective computerized warehousing management system with over 98% of availability during operating hours for OSRAM Goods at its own cost, including but not limited to that Service Provider shall comply with SOP

Service Provider shall provide adequate IT and related personnel to ensure ongoing technical support, between Service Provider's and OSRAM's SAP at its own cost, working together with OSRAM's SAP project team, including participating in related workshops at OSRAM's or the Service Provider's premises upon OSRAM's request.

### 14.3 Service Tasks

Service Provider shall perform the specific service tasks Even OSRAM is free to enter into Transportation Agreement(s) with third party (ies) other than Service Provider.

### 14.4 Personnel

Service Provider shall provide all the necessary and qualified personnel in all Warehouse functions. Personnel of Service Provider of administrative functions in contact with OSRAM shall have reasonable knowledge of English language as necessarily required for the performance of this Agreement by Service Provider.

### 14.5 Handling Equipment

Service Provider shall provide at its own cost all Material Handling Equipment (MHE), which is appropriate for the handling of OSRAM Goods, including but not limited to pallet jack, forklift truck, label printer, office printer, and an office PC (in full compliance with OSRAM's IT guideline) with VPN access to OSRAM's SAP terminal (if system interface implemented).

Service Provider shall further provide all maintenance for the equipment and replacement equipment if any equipment is no longer fully operational at any time during the Term of this Agreement.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

Additional equipment for the Warehouse may be purchased by OSRAM when OSRAM deems it appropriate and desirable at its discretion (hereinafter referred to as "OSRAM Owned

Equipment") and such OSRAM Owned Equipment shall be OSRAM's property. Service Provider shall hold all OSRAM Owned Equipment and shall exercise reasonable care in the use and custody of such property and shall use such property only in performing its obligations under this Agreement. OSRAM assumes full responsibility for all maintenance of OSRAM's Owned Equipment. Service Provider shall not grant any security interest or incur any liens or any other encumbrances on the OSRAM Owned Equipment. Upon termination or expiration of this Agreement, or upon OSRAM's written request at any time, Service Provider shall promptly return all OSRAM Owned Equipment.

### 14.6 Flexibility

Service Provider shall at all time exercise flexibility in its provision of storage space, performance of services and provision of manpower bearing in mind that the requirements of storage space, amount of freight volume of OSRAM and the services may vary in size and frequency. In the event the storage space requirement of OSRAM is envisaged to increase to a higher tune in comparison to that of the previous month, OSRAM shall notify Service Provider

of the same by giving one-month advance notice, and Service Provider shall make a good faith effort to secure the necessary storage space on behalf of OSRAM at the same then current rate

## 15. General Performance Requirements

### 15.1 Movement of OSRAM Goods

Service Provider shall make movement of OSRAM Goods strictly in accordance with orders given by OSRAM regarding collection of OSRAM Goods from the Warehouse ("Delivery Orders"), which shall be filed and maintained by Service Provider. OSRAM shall have easy access to such information/documents at all time.

Service Provider shall be responsible for selecting the appropriate area within the Warehouse for storing OSRAM Goods which is fit for such purpose and may, without notice, move them within the Warehouse, but shall not, without the prior written consent of OSRAM, move OSRAM's Goods to another warehouse or another building. This provision does not prevent Service Provider from moving OSRAM Goods within

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

the Warehouse for security, fire prevention, sanitation or other Service Provider's internal warehousing management purpose and Service Provider shall take full responsibility for such movement.

### **15.2 Customer Inquiries**

All enquiries from OSRAM customers or vendors about storage or dispatch of any OSRAM Goods shall be made only via OSRAM.

### **15.3 FIFO Management**

Service Provider shall ensure a First-In-First-Out ("FIFO") methodology to be applied at all-time in Service Provider's warehouse and to the physical movement of OSRAM Goods. Under FIFO methodology, Service Provider shall always first pick up and check out those OSRAM Goods for collection which have been checked into the Warehouse the earliest within the same type of OSRAM Goods.

### **15.4 OSRAM's Competitors' Goods**

Service Provider shall not store any of OSRAM's Competitors' goods in the Warehouse. "OSRAM's Competitor" shall mean a light source company in OSRAM's sole judgment. In case of doubt, Service Provider shall consult with OSRAM on whether a particular entity is an OSRAM's Competitor.

### **15.5 Taking Over-Handing Over**

At the point of taking over and handing over of OSRAM Goods from/ to OSRAM Designees (e.g. when Service Provider is receiving and issuing OSRAM Goods at the Warehouse), both Service Provider and OSRAM Designate shall sign and indicate time of taking over/ handing over on the Delivery Order, or other appropriate take over-hand over document,

### **15.6 Missing OSRAM Goods**

Service Provider shall provide OSRAM accurate stock count following procedures described in this Agreement. Service Provider shall be liable to compensate OSRAM for any stock deficit beyond the monthly acceptance level (i.e. 0.01% of total stock value) at the amount equivalent to the Cost selling price of such missing OSRAM Goods. Service Provider shall not raise surplus of one type of OSRAM Goods to avoid liability for the missing OSRAM Goods of another type. Compensation for missing OSRAM Goods shall be paid to OSRAM Via debit note & credit note.

### **15.7 Opening Hours**

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

Service Provider shall keep the Warehouse open during the opening hours and shall provide the service of releasing/ issue of OSRAM Goods during the hours. Timings is 9:00am to 6:00 pm

### **15.8 People Having Access**

Access to the Warehouse areas where OSRAM Goods are stored shall be limited to the assigned personnel and/or designated representatives of Service Provider and OSRAM during normal opening hours.

### **15.9 Target Delivery Service Level:**

As defined KPI in agreement.

Service Provider guarantees that it shall successfully achieve a target Delivery Service Level as defined of 98%, meaning that 98% of the monthly Delivery Orders shall be served (that is, packed and made available for delivery or collection) accurately. A Delivery Order shall be deemed as served accurately if it is served strictly in compliance with the following requirements to be contained in the Delivery Order without visible damages:

- i. The type of OSRAM Goods;
- ii. The quantity;
- iii. The packaging required;
- iv. The collection time; and
- v. The identity of the recipient.

If Service Provider fails to meet a minimum of 90% of the Delivery Service Level for two consecutive months, excluding the initial first three months after the Commencement Date, OSRAM shall have the right to take penal action as per the agreement.

### **15.10 Monthly Meeting**

The representatives of Service Provider and OSRAM shall meet monthly to review the performance of Service Provider and any complaints from OSRAM's own personnel and/or its customers, such as complaints about packing mistakes, inventory differences, damages, incorrect and/or delayed performance of Delivery Orders, etc.

### **15.11 Future Improvement of Efficiency**

Both Parties will strive to continuously improve the efficiency of the services of Service Provider and reduce costs by common optimizations, utilization of productivity and rationalization of all working procedures. Further cost reductions where possible shall

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

be taken into account when the Parties negotiate the future rates.

### **15.12 Codes of OSRAM Goods**

Service Provider shall record all OSRAM Goods and any movements or services performed in relation to any OSRAM Goods in accordance with OSRAM's IC Codes and/ or Part Numbers for such OSRAM Goods, and shall input all the above into Service Provider's electronic warehouse management system in accordance with such OSRAM IC Codes and/ or Part Numbers. IC Code and Part Number are OSRAM's standard codes for finished goods or any other type of goods.

### **15.13 Compliance with SOP**

Service Provider shall comply with the SOP.

### **15.14 Compliance with OSRAM security and emergency plan requirement**

Service Provider shall comply with the OSRAM security and emergency plan requirement.

## **16. OSRAM Security and Emergency Plan Requirement**

### **16.1 Objective**

The purpose of this document is to ensure daily warehouse operation done smoothly and be able to minimize the impact as much as possible and recover normal operation in case of any crisis, disaster or accidents happened in any form.

### **16.2 Scope**

The Security Requirements of Preventive Crisis Management and Disaster Recovery Plan are OSRAM's standard/basic contractual requirements for Service Provider to meet OSRAM's minimum-security standards. In case OSRAM feel the Securities is insufficient to protect OSRAM's Goods, OSRAM might enhance the Securities and the Securities shall be incorporated into the Agreement, and Service Provider is required to meet the Securities.

The resources to meet the Securities shall be the responsibility of Service Provider and at Service Provider's own expense.

### **16.3 General**

At acceptance of the contract, Service Provider shall submit to OSRAM Corporate Logistics Manager and Corporate Preventive Crisis Management or their designees, a copy of Service Provider's security measures meeting all requirements. Service

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

Provider shall provide and maintain adequate security measures at any facility that handles or stores OSRAM's Goods. The facility security is to be based on good physical barriers, the efficient operation of intruder alarm and CCTV surveillance if required by OSRAM and strict adherence to agreed standard operational procedures.

Facilities will be audited and approved by OSRAM Corporate or Logistics prior to commencement of operations. In exceptional circumstances OSRAM can issue waivers or exceptions. OSRAM Corporate or Logistics must approve all waiver requests.

### 17. Security Requirements

#### 17.1 Adequate documented security procedures

- Appropriate maintenance of all security equipment to ensure that all systems are fully operable, in good working condition, with all parts intact.
- Local documented procedures for handling OSRAM's Goods and escalation procedures for communicating security incidents to OSRAM.
- An inventory of OSRAM goods should be available and updated regularly in order to detect
- missing goods. Process for timely reporting incidents of lost or missing OSRAM's Goods. Such incidents are to be reported by Service Provider to OSRAM within 24 hours of detecting missing OSRAM's Goods.
- Emergency customer, local management and local police/fire brigade contacts and phone numbers for incidents to be listed and readily available.
- Service Provider security policy statement available and communicated to all employees.
- Adequate control of paperwork. Restricting knowledge of transit/movement of OSRAM's Goods to need to know only (Information Security), and important information/documentation referring to OSRAM's Goods shall be locked up.

#### 17.2 Facility Security

- The facility shall be constructed of reinforced concrete or steel construction with adequate protection.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 17.3 Enclosed external loading/unloading area:

- Compound perimeter will be enclosed with a secure fence or hard walls with traffic and pedestrian entrances controlled by guards.
- Fence should be well maintained, no gaps, enough to deter climbing (e.g. steel palisade fencing)
- Controlled gates, well maintained, no gaps, enough to deter climbing. Closed when not in use and only authorized vehicles admitted to area.

### 17.4 Perimeter windows, doors & other openings:

- Procedures in place for dock doors to be closed/secured when not in use. It might be allowed to use dock security screens (wire mesh doors), which will allow airflow into the building, while maintaining a level of security/intrusion avoidance, during normal operating hours.
- All windows & doors reinforced to prevent entry
- Reinforced exit doors from warehouse (steel doors & frames or suitable alternative).
- Any windows or other openings in warehouse walls must be secured by steel bars/mesh
- All windows & doors should be locked outside normal working hours.

## 18. Access Control General

- Access control processes in place during and outside normal operating hours to ensure only authorized personnel gain access, which is subject to review from time to time upon OSRAM's request.
- Access control processes in place for Incoming/Outgoing traffic screened for driver identify/authorization for OSRAM Goods receiving or release.
- Access to Service Provider facilities will be limited to only employees working there.
- All entrances shall be protected by security officer or access control system

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Professional security guard presence on site at all times with regular ongoing training. Security personnel will be randomly rotated so as not to become too familiar with Service Provider employees.
- Controlled access to vehicles and pedestrians to ensure there is a secure environment for vehicle loading or unloading.
- Access list is in place and updated timely, which is maintained for 90 days and reviewed on monthly basis to ensure it remains current.
- Restricted access to areas where OSRAM Goods is stored or handled, esp. applicable to Service Provider visitors and contractors, and otherwise take all precautions necessary to ensure the security of personnel, equipment and OSRAM's Goods.

### 18.1 Access Areas

- Access at visitor office entry point(s) securely controlled and monitored
- Limited access to dock/warehouse areas
- Access to dock areas based on operational need and restricted. Only Service Provider's authorized employees and escorted visitors are permitted access to dock/warehouse.
- High value storage area (if deemed applicable by OSRAM) High-grade security mesh/wall.
- Complete coverage of storage location Restricted-access, cage/vault area for assets
- All external dock/warehouse doors secured unless required to be opened for normal transit operations.

### 18.2 Badge policy

- Employee ID picture badges required to be issued and worn.
- Badge policy for visitors/contractors in place.
- A photo ID badge will always be worn by employees and contractors. The identity of visitors will be verified against government issued ID. Visitors will always be issued with distinct badges and be escorted.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 18.3 Personal Securities or CCTV should have control in below areas specially.

Service Provider shall invest in on-going team efforts to assess risks to unit integrity and provide security guard services system.

### 18.4 General

- Securities system able to view perimeter fence, entry gates, all loading/unloading docks, main passages and storage areas in the Warehouse.
- Securities should be capable of capturing the identity of all individuals entering the area.

### 18.5 Lighting

- Flood lighting of enclosed loading/unloading areas.
- Dock doors illuminated externally at night.
- Docks: All interior (shipping and receiving) dock doors shall be afforded 100% Securities coverage.
- Truck Yard: Each access and egress point (gates) to the truck yard as well as each exterior dock door shall be afforded 100% Securities coverage.
- Warehouse Areas: Areas of pack on demand, consolidation and staging area shall be afforded 100% Securities coverage.
- Sensitive Areas (if deemed applicable by OSRAM) : All high value item, computer rooms, and other areas deemed sensitive by management and the security managers shall be afforded 100% Securities coverage.

## 19. Emergency alarm system

- Monitored Fire Protection System, including but not limited to fire alarm system, fire sprinkler system, Gas fire suppression system and fire Hydrant system.

### 19.1 High Value Inventory (HVI) Storage/Processing Area (If applicable)

- Secure storage location(s) for OSRAM's Goods within the Warehouse to store High Value Inventory designated as "Secure" items. Access to these areas will be further restricted and controls will be enough to deter and prevent unauthorized access. The entry procedure must include a method to establish the identity of persons (names and addresses) who have entered the High Value Inventory area. Examples of such controls include key logs and card reader access list. Under some circumstances, product stored in racks at enough height and benefiting from appropriate CCTV coverage may meet the provisions of this requirement. However, the decision to approve the method lies solely with OSRAM.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 19.2 Information Technology Security

- Service Provide shall propose the disaster recovery plan and submit to OSRAM for review to meet OSRAM corporate security policy.

### 19.3 Training

- Robbery and burglary awareness training provided critical for all personnel. (All security, dock, etc.)
- Training to all employees pertaining to access to the Warehouse and how to address unauthorized personnel, suspicious actions or theft.
- Training to all employees how to handle/use portable fireextinguishers.

### 19.4 Employees & contractors screening

- The background checks and other mandatory legal requirements for employment of 3PL Staff are under Scope of 3PL .

### 19.5 Terminated employees & contractors' procedure

- Termination procedures in place for employees and contractors, ensuring return of ID's, access cards, keys and other sensitive information.
- Procedures in place preventing systems access to OSRAM data by terminated employees.
- Records kept preventing Service Provider re-hiring terminated employee/contractor without considering previous background.

### 19.6 Disaster Recovery Plan

Service Provide shall propose their emergency/disaster recovery plan to OSRAM for review to ensure compliance with OSRAM corporate security policy, which including but not limited to:

- Procedure for dealing with Storms
- Procedure for dealing with Fire-Alarm

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- Procedure for dealing with Floods
- Procedure for dealing with Theft/Robbery
- Procedure for dealing with Oil Leakage
- Procedure for dealing with Emergency Injured Employees
- Procedure for dealing with Chemical Spill
- Procedure for dealing with Earthquake
- Procedure for dealing with Communication Breakdown
- Emergency Contact List

### 20. Pricing and Payment

#### ■ Pricing Method

- OSRAM shall pay Service Provider for its warehousing and related services as per the Agreement.

#### ■ Rates

- The rates for warehousing and related services provided will be as per the warehousing agreement or contract

#### ■ Invoicing and Payment

- Service Provider shall, within seven (10) working days after the end of each calendar month provide to OSRAM a billing summary containing details on the composition of the charges incurred for the services provided by Service Provider to OSRAM during the preceding month, including a description of the OSRAM Goods stored at the Warehouse and/or services performed and the applicable charging rate(s)
- OSRAM shall, within seven (10) working days after its receipt of the above summary, confirm or dissent on the charges with Service Provider via a written notice. If OSRAM does not provide Service Provider such a written notice within the above-mentioned seven (10) working days period, all charges shall automatically be deemed to be confirmed.
- After the confirmation of the charges, Service Provider shall issue an official tax invoice or debit note to OSRAM within the month immediately following the month for which the payment is made, bearing the amount of the charges that were confirmed.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- OSRAM shall make the payment within the time period as specified in contract or agreement
- **Deduction of Penalty**
- If the Service Provider fails to achieve the target KPI, it shall be subject to a penalty calculated in accordance of this Agreement. OSRAM is entitled to deduct such penalty from any payment due to Service Provider upon submission of the specific Credit Notes. If Service Provider disputes OSRAM's deduction of penalty, the Parties shall resolve the dispute in accordance with clause mentioned in agreement.

### 21. SAP Warehouse Manual (QRC's Additional) General Guidelines

#### 21.1 Scope of Work

Responsible for warehousing activities on behalf of OSRAM Lighting Pvt. Ltd, including receipt of material, dispatch of material, timely reporting to OSRAM Management as per guidelines provided, Compliance of all statutory requirements and compliance with guidelines and operating procedures issued by OSRAM Lighting.

#### 21.2 Warehouse Layout.

Should have proper layout of warehouse marking designated area for storage of different group of material, office area, passage, loading & unloading point, emergency and/or fire exits etc. Warehouse layout must be on display board of office.

#### 21.3 Warehousing Organization Chart

Warehouse must have Organization Chart, with clear definition of roles and responsibilities of individuals. Warehouse layout also must mention warehouse working hours.

### 22. Goods Receipt in SAP

#### 22.1 Good Receipts in 3PL Warehouse. (/ Local Vendor/ Stock Transport Order)

- After completing all the physical material checking activities 3PL will check for IB in SAP.
- 3PL will go ahead for GR upon IB is confirmed.
- T-code is MIGO movement type 101 or Automated process as mentioned in Inbound process.
- Put Inbound Delivery No. in SAP.
- Press Enter and next screen appears.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- All the item in particular IB will be displayed
- Fill Delivery note (Invoice no / IBT no )
- Fill Bill Of Lading (LR No. / BOE No.)
- Check the Product and Quantity of the material as per the STO / IBT / Invoice.
- If everything is OK then check mark all items and press Post.
- At the bottom near Status bar the screen will give you the Good Receipt No and will show document posted.
- Note down the SAP GR NO.- Like “5000140720” and date on the copy of the STO / IBT / Invoice.
- On completion of above process placement team will place the material in unrestricted area based on GR Details.
- Final all inward document will be kept in records for future.
- In case any shortage /breakage are noticed more than excess clause please process for insurance claim.

### **22.2 Good Receipts in 3PL Warehouse. (Imports)**

- After completing all the physical material checking activities 3PL will check for MIRO confirmation from HO Logistics
- Upon confirmation of MIRO, IB is checked by 3PL in SAP
- Upon IB confirmation 3PL will go ahead with GR in SAP
- T-code is MIGO movement type 101.
- Put Inbound / Outbound Delivery No. in SAP
- Press Enter and next screen appears
- All the item IB / OB will be displayed
- Fill Delivery note (invoice no / IBT no)
- Fill Bill of Lading (LR No. / BOE No.)
- Check the Product and Quantity of the material as per the STO / IBT / Invoice
- If everything is OK, then check mark all items and press Post
- At the bottom near Status bar the screen will give you the Good Receipt No and will show document posted
- Note down the SAP GR NO.- Like “5000140720” and date on the copy of the STO / IBT / Invoice
- On completion of above process placement team will place the material in unrestricted area based on GR Details.
- Final all inward document will be kept in records for future
- In case any shortage /breakage are noticed more than excess clause please process for insurance claim
- On completion of above process placement team will place the material in unrestricted area
- Final all inward document will be kept in records for future

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

- In case any shortage /breakage are noticed more than excess clause please process for insurance claim

### **22.3 General guidelines for Goods Receipt in SAP**

- Under no circumstance, Goods Receipt can be done without physically receiving of the materials. This is a very important point, and has to be adhered in totally, as it has serious implications on various statutes. Any violation in this regard shall be viewed seriously.
- Whether all the SKUs have got properly updated, is to be verified by using Transaction Code MB03. The Document Number posted is to be keyed in. The SKUs will appear on the screen; this can be checked with the copy of the Stock Transfer Invoice / Delivery Challan / Tax Invoices.
- Promotional Consignments, like Publicity material, Stationery items / Shade Cards, etc. should be kept separately. The receipt of such items should be notified to the concerned dept.

## **23. Outward Process in SAP**

- Stock transfers (IBT)
- Invoice dispatch to customers (Local & Upcountry)
- FOC Samples.

### **23.1 Stock Transfer Order**

- Create Outbound Deliveries by VL10D
- Put shipping points
- Put delivery creation date
- Press F8
- Select Line item and click on background to create the delivery

## **24. Reversal or Cancellation of Stock Transport Order / Tax Invoice**

### **24.1 Stock Transport Order / Tax Invoice Cancellation in SAP: - Normal**

- Cancel Billing Document using T-Code VF11
- Cancel the Shipment using T-Code VT02N
- Reverse the delivery using T-code VL09
- Delete the Delivery by using T-code VL02N
- Open PO closure in case of Stock Transport Order is to be done by respective BU SCP

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

---

### 25. *Return receipts from customer to 3PL process in SAP*

#### 25.1 Sales Return / Customer Refusals

- For Taking Sales Return in SAP, below are the steps to follow to complete the process
- A Return Order YRO (n) will be created in SAP by Logistics / Controlling / Customer Service
- 3PL will check for YRO in VL10C.
- Will check the relevant YRO and press background for Delivery Creation
- Will put the Delivery No. in VL02N and fill in the Physical Qty received in Picking Qty
- Will press the “Post Goods Receipt” button to complete the process.

#### 25.2 Defective Return

- For Taking Defective Return in SAP, below are the steps to follow to complete the process
  - A Defective Return Order YRO (k) will be created in SAP by OSRAM.
  - 3PL will check for YRO in VL10C.
  - Will check the relevant YRO and press background for Delivery Creation
  - Will put the Delivery No. in VL02N and fill in the Physical Qty received in Picking Qty
  - Will press the “Post Goods Receipt” button to complete the process
26. In case of defective returns, no movement will be created, material will be scrapped off automatically in SAP.

### *Procedure for posting shortage / breakage in SAP*

- USE T-CODE – MB1A
- Material Slip – Enter IBT No.
- Doc Header Text – Enter “Approved By”.
- Movement Type – 551
- Plant Code – e.g. “D960”
- Storage Location – e.g. “0001”
- Reason for Movement – Put 0009 – For In-Transit Shortage /Breakage
- GL Account – 60100290
- Cost Centers - 80V0DS9800 / 80V0TX9800 / 80V0AM9800/80VPIA9800  
(Cost centers are also created for each Plants)  
Ex. For If you want to scrap posting in AM material in D987 Plant then you use GL account same as above & Cost center you can use 80V0AM D987.

### 27. *DG Process*


- a) DG Products needs to be stored separately at a designated area for DG Products
- b) Radiation Monitoring to be done at least 3 times in a day
- c) Readings of Radiations are to be maintained in a manual register
- d) Radiation Meter (provided by OSRAM) should be always in the custody of DG Trained Person.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### 28. Stock transfer Process in SAP:

*RUN T-Code – VL10D and fill in the details as shown below:*

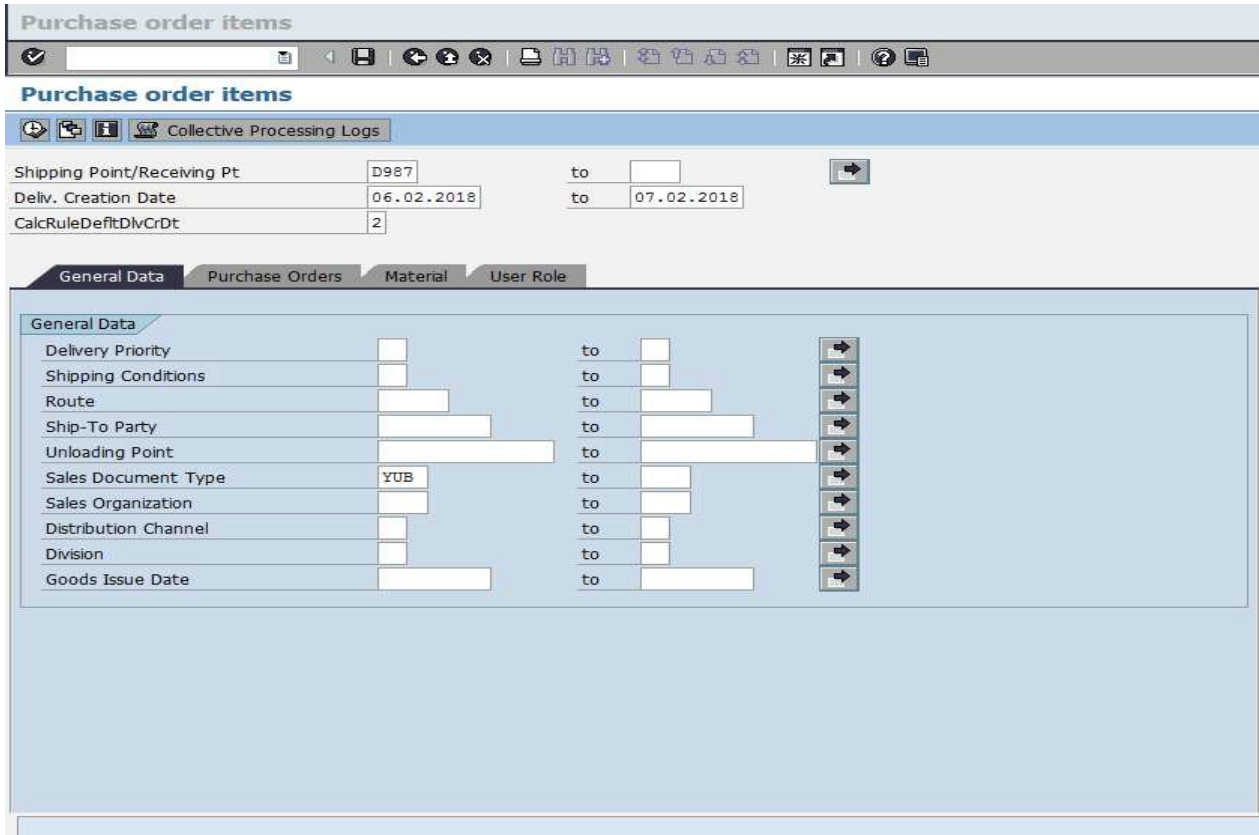

The screenshot displays the SAP VL10D 'Purchase order items' form. At the top, there is a title bar 'Purchase order items' and a standard SAP toolbar. Below this, a sub-header 'Purchase order items' is followed by a 'Collective Processing Logs' button. The form contains several input fields for shipping and delivery details. Below these, there are four tabs: 'General Data', 'Purchase Orders', 'Material', and 'User Role'. The 'General Data' tab is active, showing a list of fields for delivery and shipping information, each with a 'to' field and a right-pointing arrow button.

| Field                       | Value      | to | Value      |
|-----------------------------|------------|----|------------|
| Shipping Point/Receiving Pt | D987       | to |            |
| Deliv. Creation Date        | 06.02.2018 | to | 07.02.2018 |
| CalcRuleDefitDlvCrDt        | 2          |    |            |

| Field                | Value | to | Value |
|----------------------|-------|----|-------|
| Delivery Priority    |       | to |       |
| Shipping Conditions  |       | to |       |
| Route                |       | to |       |
| Ship-To Party        |       | to |       |
| Unloading Point      |       | to |       |
| Sales Document Type  | YUB   | to |       |
| Sales Organization   |       | to |       |
| Distribution Channel |       | to |       |
| Division             |       | to |       |
| Goods Issue Date     |       | to |       |

You will get the screen like below displaying all the Stock Transfer to be executed and dispatched from your plant

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Activities Due for Shipping "Purchase order items"

Select the line items of the Stock Transfer Purchase Order and then click on Background to convert the same to Outbound Delivery (process is same as the Customer Sales Order OB creation)

|                                                                                                               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 4551438474 51053129 INM016 CIF Gurgaon 606,615.000 1,853.700                                                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 10 AM104530155 BA-ECO-M-780-G1 13,5W 12V 80X1 OSRAM 3,700.000 PCE 606,615.000 G 1,853.700 CD3 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 20 AB420820055 BL-4400-865-1120 VS50 G1 OSRAM 500.000 PCE 36,680.000 G 637.000 CD3            |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 30 AA1393601GT CFL MAG.BALLAST 13W/240 40X1 OSRAM 320.000 PCE 106,440.000 G 62.720 CD3        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 40 AA1391E01GT CFL MAG.BALLAST 18W/240 40X1 OSRAM 2,000.000 PCE 665,250.000 G 392.000 CD3     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 50 AA328440355 OT 240/24 DIM P 8X1 OSRAM 64.000 PCE 115,680.000 G 333.504 CD3                 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 60 AA328440355 OT 80/24 DIM P 10X1 OSRAM 260.000 PCE 289,900.000 G 713.960 CD3                |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 70 AB4532500GF OT FIT 45/220-240/1A0 CS VS20 IN OSRAM 500.000 PCE 81,275.000 G 190.000 CD3    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 80 AA614290255 OTE 13/220-240/350 PC VS20 OSRAM 2,000.000 PCE 227,000.000 G 530.000 CD3       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 90 AA626860255 OTE 18/220-240/500 PC VS20 OSRAM 500.000 PCE 61,950.000 G 147.000 CD3          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 100 AA611730255 OTE 25/220-240/700 PC VS20 OSRAM 100.000 PCE 12,390.000 G 29.400 CD3          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 110 AA403530355 OTE 35/220-240/700 PC VS10 OSRAM 100.000 PCE 20,550.000 G 44.900 CD3          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| D987 07.02.2018 120 AA691950755 PT-FIT 70/220-240 E VS20 OSRAM 300.000 PCE 79,050.000 G 127.800 CD3           |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

| Activities Due for Shipping "Purchase order items" |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|----------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Activities Due for Shipping "Purchase order items" |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Dialog Background                                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

In case of any error please inform HO Logistics Team,  
Once the delivery is created please run VL02N

## Standard Operating Procedure (SOP)

Change Outbound Delivery

✓

<

🖨️

↺

🔍

⌂

📄

👤

🗃️

🔄

🏠

🧾

👤

❓

📋

Change Outbound Delivery

🔄

📄

📅

🔄

🚚

📅

📅

🔄

📄

📅

📅

Post Goods Issue

Outbound Delivery

360202935


Press Enter

[illegible]


# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Then select Go to from main menu

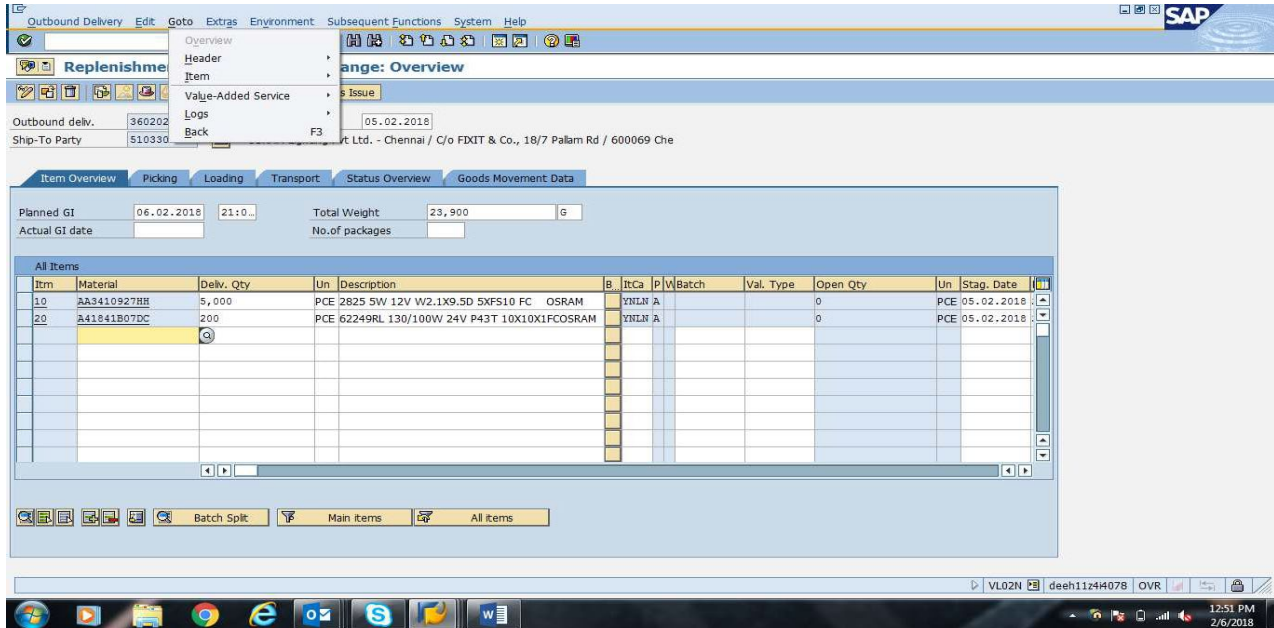

Go to Header and then administration

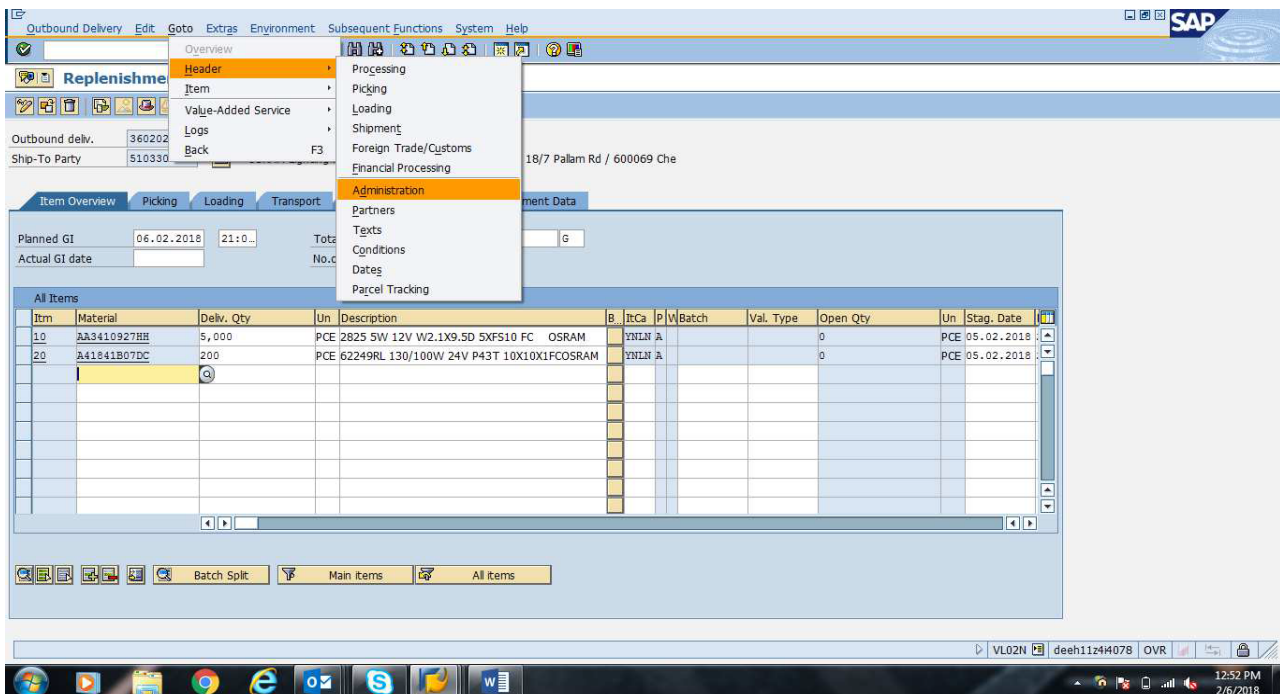

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

You will find Delivery Block of “YH Compliance”

The screenshot shows the SAP Outbound Delivery Header Details for document 360202935. The 'Organization' section includes Ext. Delivery (Free Usage), Shipping Point (D987 PDC Mumbai), Sales Org. (0080 OSRAM Lighting Pvt.), and Sales Office. The 'Document Editing' section shows it was created by VIVEK.SINGH on 05.02.2018. The 'Control' section shows 'Delivery block' set to 'YH Compliance', 'Delivery Type' as 'YHCL Replenishment Div.', and 'Document cat.' as 'Delivery'. The 'CD Process' field is empty. The taskbar at the bottom shows various application icons and the system clock at 12:53 PM on 2/6/2018.

Then from drop down menu select Blank in place of “YH Compliance”

This screenshot shows the same SAP Outbound Delivery Header Details, but with the 'Delivery block' dropdown menu open. The menu lists various delivery block options, with 'YH Compliance' highlighted. Other visible options include 'YD Del.block:Cent.Cust.', 'YE Doc. incomplete', 'YF Awaiting price appro', 'YG LED-Position', 'YI Delivery Block', 'YJ OERI DG Short Sea ?', 'YL Minimum Order value', 'YM Drawings not be appr', 'Z1 St. Cust. Incomplet', 'ZL Wrong Delivery', and 'ZX St. Cust.bankruptcy'. The rest of the form fields remain the same as in the previous screenshot.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Outbound Delivery Edit Goto Extras Environment Subsequent Functions System Help

Replenishment Div. 3 Save (Ctrl+S) Change: Header Details

Post Goods Issue

Ship-To Party 51033028 OSRAM Lighting Pvt Ltd. - Chennai / C/o FXIT & Co., 18/7 Pallam Rd / 600069 Che

Processing Picking Loading Shipment Foreign Trade/Customs Financial Processing Administration Partner Texts Conditions Dates Parcel Tracking

Organization

Ext. Delivery Free Usage

Shipping Point D987 PDC Mumbai

Sales Org. 0080 OSRAM Lighting Pvt.

Sales Office

Document Editing

Created By VIVEK.SINGH Created on 05.02.2018 19:20:29

Changed by Changed On

Control

Delivery Prior. Complete div.

Delivery block Order Combinat.

Delivery Type YNL Replenishment Div. CD Process

Document cat. j Delivery

VL02N deeh11z4H078 OVR

12:55 PM 2/6/2018

Outbound Delivery Edit Goto Extras Environment Subsequent Functions System Help

Change Outbound Delivery

Post Goods Issue

Outbound Delivery 360202935

Replenishment Div. 360202935 has been saved

VL02N deeh11z4H078 OVR

12:55 PM 2/6/2018

Then Press Save.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Now Rest of the Process is same as the Customer Invoice Creation.

### 29. Cancellation of Invoice:

**YF2 Invoice 981004356 (YF2) Display Billing Document**

Billing document: 981004356

More Search Criteria

Document Number:

Company Code:

Fiscal Year:

Reference:

Put Invoice No. in Billing Document Column Then press document flow (highlighted in yellow)

**YF2 Invoice 981004356 (YF2) Display Billing Document**

Billing document: 981004356

More Search Criteria

Document Number:

Company Code:

Fiscal Year:

Reference:

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Document Flow**

Business partner 0051053813 Tv18 Broadcast Ltd

| Document                       | On         | Status      |
|--------------------------------|------------|-------------|
| YAG Quotation 0150102782       | 12.10.2017 |             |
| YTA Standard Order 0252133546  | 13.10.2017 | Completed   |
| Outbound delivery 0360160701   | 13.10.2017 | Completed   |
| YF2 Invoice 0981004356         | 13.10.2017 | Completed   |
| Accounting document 0312001016 | 13.10.2017 | Not cleared |

Now note down this Outbound Delivery No. and go to VL03N and put this OB No. there and again press Document Flow (highlighted in Yellow).


**Display Outbound Delivery**

Outbound Delivery 0360160701

# OSRAM Lighting Private Limited


## Standard Operating Procedure (SOP)

please contact HO – Logistics for their confirmation if all the Invoices are to be cancelled or only one of these Invoices is to be cancelled, in case only 1 or 2 Invoices out of multiple Invoices is to be cancelled then **PLEASE DO NOT GO AHEAD WITH CANCELLATION SUCH CASES WILL BE TAKEN CARE BY ANOTHER METHOD**

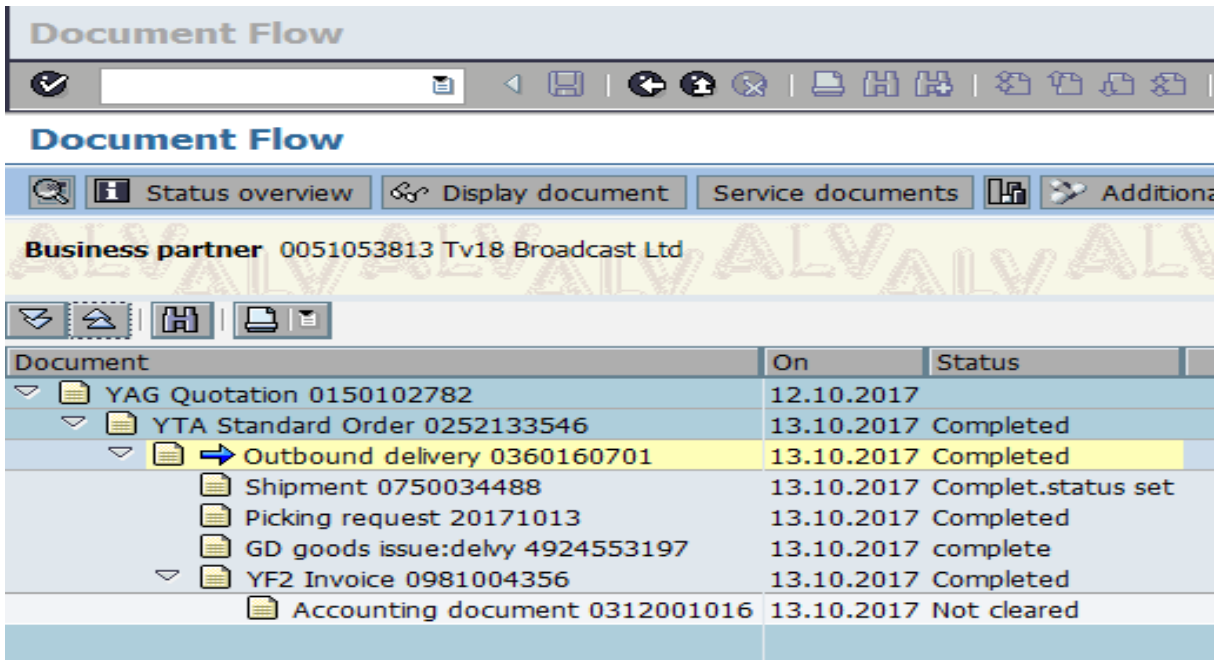

| Document                        | On         | Status              |
|---------------------------------|------------|---------------------|
| YAG Quotation 0150102782        | 12.10.2017 |                     |
| YTA Standard Order 0252133546   | 13.10.2017 | Completed           |
| Outbound delivery 0360160701    | 13.10.2017 | Completed           |
| Shipment 0750034488             | 13.10.2017 | Comple.t.status set |
| Picking request 20171013        | 13.10.2017 | Completed           |
| GD goods issue:delvy 4924553197 | 13.10.2017 | complete            |
| YF2 Invoice 0981004356          | 13.10.2017 | Completed           |
| Accounting document 0312001016  | 13.10.2017 | Not cleared         |

below process, open a new session and put T – Code VF11, put Invoice Date and No. as per below

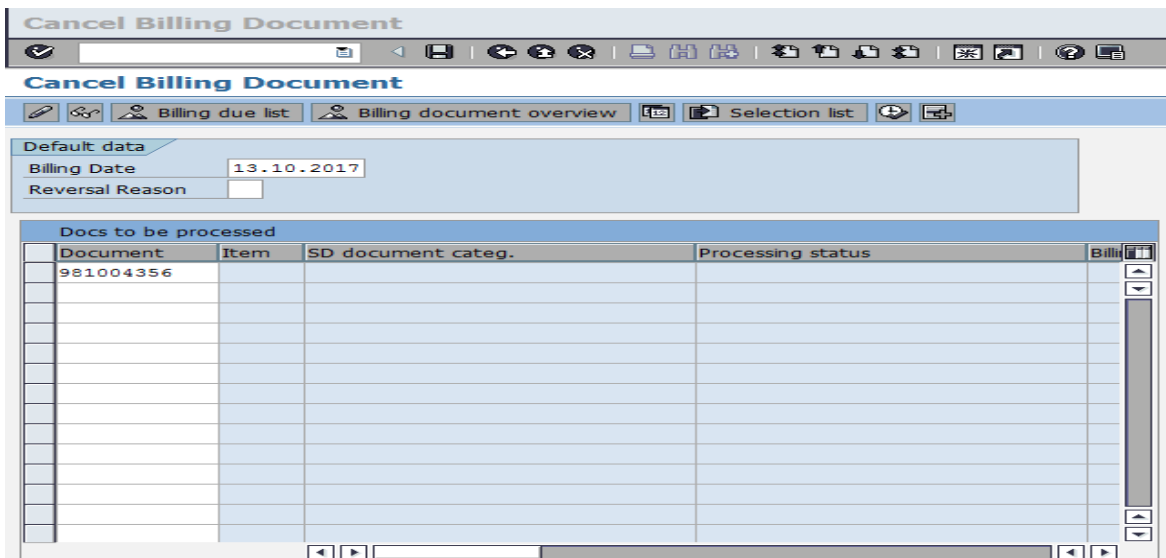

| Document  | Item | SD document categ. | Processing status | Bill |
|-----------|------|--------------------|-------------------|------|
| 981004356 |      |                    | Billed            |      |

screen shot.

## Standard Operating Procedure (SOP)

yellow at the bottom of below screenshot, in case you find any error then please contact HO –

[illegible]

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Logistics (Mr. Pavan Pathak & Mr. Rampal Rath)

Now go back to the VL03N Screen and hit back button and again press Document Flow, you will get the status as below

**Document Flow**

Business partner 0051053813 Tv18 Broadcast Ltd

| Document                       | On         | Status              |
|--------------------------------|------------|---------------------|
| YAG Quotation 0150102782       | 12.10.2017 |                     |
| YTA Standard Order 0252133546  | 13.10.2017 | Completed           |
| → Outbound delivery 0360160701 | 13.10.2017 | Being processed     |
| Shipment 0750034488            | 13.10.2017 | Comple.t.status set |
| Picking request 20171013       | 13.10.2017 | Completed           |
| GD goods issue:delv 4924553197 | 13.10.2017 | complete            |
| YF2 Invoice 0981004356         | 13.10.2017 | Completed           |
| Accounting document 0312001016 | 13.10.2017 | Cleared             |
| YS1 Cancel. Invoice 0799000732 | 16.10.2017 | Completed           |
| Accounting document 0312001245 | 16.10.2017 | Cleared             |

Now go back to the other session where you have completed VF11 and put VL09, and put your Outbound Delivery No. of Cancelled Invoice in Inbound / Outbound Delivery as shown in below screenshot and press execute

**Reverse Goods Movement**

Transacts to Be Canceled

|                             |           |    |  |   |
|-----------------------------|-----------|----|--|---|
| Shipping Point              |           | to |  | → |
| Route                       |           | to |  | → |
| Goods Movement Date         |           | to |  | → |
| Inbound / Outbound Delivery | 360160701 | to |  | → |
| Group of Deliveries         |           | to |  | → |
| Shipment Number             |           | to |  | → |


☒ Inbound Delivs & Outbound Delivs  
☐ Outbound Dely  
☐ Inbound Dlvs

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)


You will get below screen

Now press Select All (highlighted in Yellow) and then press Reverse

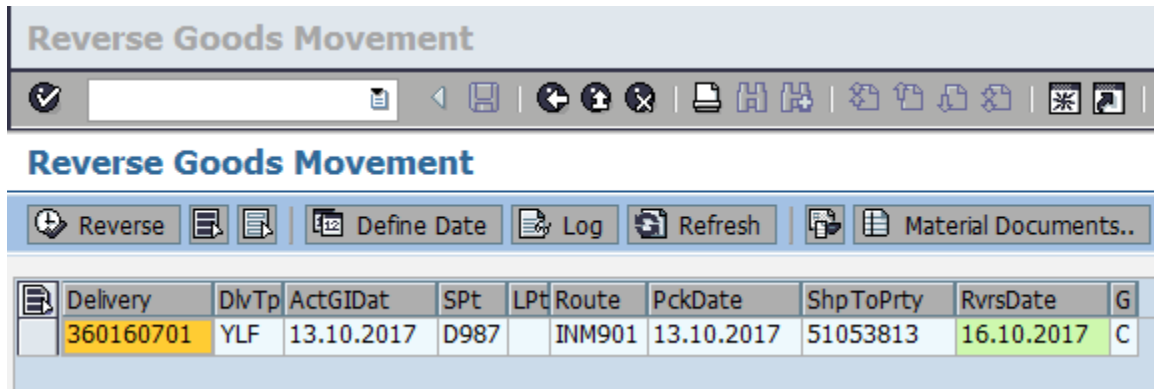

The screenshot shows the 'Reverse Goods Movement' window. At the top, there is a title bar and a toolbar with various icons. Below the toolbar, there is a section titled 'Reverse Goods Movement' with a sub-toolbar containing buttons for 'Reverse', 'Define Date', 'Log', 'Refresh', and 'Material Documents..'. The main area contains a table with the following data:

| Delivery  | DlvTp | ActGIDat   | SPT  | LPT | Route  | PckDate    | ShpToPrty | RvrsDate   | G |
|-----------|-------|------------|------|-----|--------|------------|-----------|------------|---|
| 360160701 | YLF   | 13.10.2017 | D987 |     | INM901 | 13.10.2017 | 51053813  | 16.10.2017 | C |

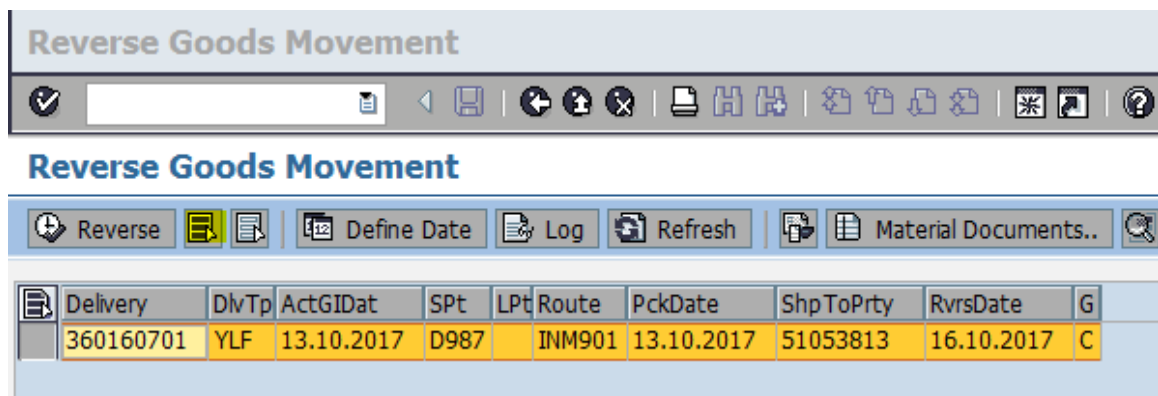


The screenshot shows the 'Reverse Goods Movement' window. At the top, there is a title bar and a toolbar with various icons. Below the toolbar, there is a section titled 'Reverse Goods Movement' with a sub-toolbar containing buttons for 'Reverse', 'Define Date', 'Log', 'Refresh', and 'Material Documents..'. The main area contains a table with the following data:

| Delivery  | DlvTp | ActGIDat   | SPT  | LPT | Route  | PckDate    | ShpToPrty | RvrsDate   | G |
|-----------|-------|------------|------|-----|--------|------------|-----------|------------|---|
| 360160701 | YLF   | 13.10.2017 | D987 |     | INM901 | 13.10.2017 | 51053813  | 16.10.2017 | C |


You will get the below Pop – Up, then please press the Right Tick Button (highlighted in Yellow)

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

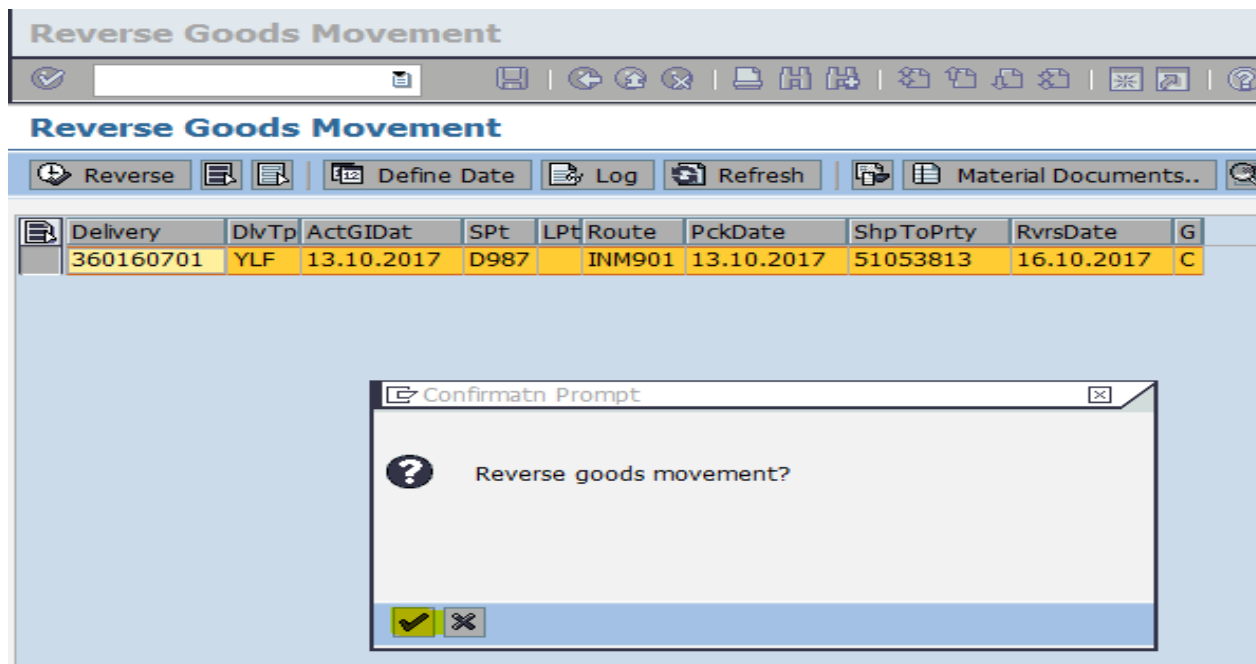

You will get below screen, in case you find any error then please contact HO – Logistics ( (Mr. Rampal Rathi or Mr. Pavan Pathak).

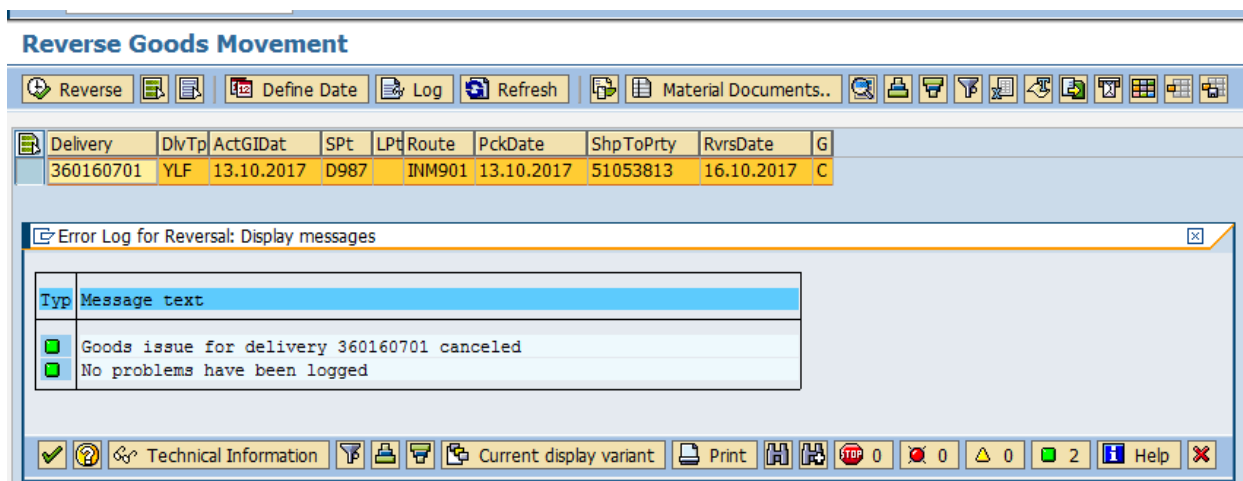

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

After this please go back to the session with VL03N screen and again hit back and then again Document Flow, you will see the details as below, now double click the Shipment.

**Document Flow**

Business partner 0051053813 Tv18 Broadcast Ltd

| Document                        | On         | Status           |
|---------------------------------|------------|------------------|
| YAG Quotation 0150102782        | 12.10.2017 |                  |
| YTA Standard Order 0252133546   | 13.10.2017 | Completed        |
| Outbound delivery 0360160701    | 13.10.2017 | Being processed  |
| Shipment 0750034488             | 13.10.2017 | Comple.statu set |
| Picking request 20171013        | 13.10.2017 | Completed        |
| GD goods issue:delv 4924553197  | 13.10.2017 | complete         |
| YF2 Invoice 0981004356          | 13.10.2017 | Completed        |
| Accounting document 0312001016  | 13.10.2017 | Cleared          |
| YS1 Cancel. Invoice 0799000732  | 16.10.2017 | Completed        |
| Accounting document 0312001245  | 16.10.2017 | Cleared          |
| RE goods deliv. rev. 4924557053 | 16.10.2017 | complete         |

**A5 IN PDC/SDC 750034488 Display: Overview**

Processing Identification Shipment Cst Cal Control Administr.

|                |                                                |                                                                             |                                |            |        |
|----------------|------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------|------------|--------|
| Shipment type  | Z013 A5 IN PDC/SDC                             | TransportPlanPt                                                             | T987                           | TransPlnPt | Mumbai |
| Overall status | 5 Shipment completion                          | Tender status                                                               | Not offered to forwarding a... |            |        |
| FwdAgent       | 99024039                                       | Safexpress Pvt. Ltd. / National Highway No.8,Mahipalpur / IN - 110048 Delhi |                                |            |        |
| Shipment route | INM901 Delhi to 9999999999(Special Case) Truck |                                                                             |                                |            |        |
| Shipping type  | M                                              | Carrier                                                                     |                                |            |        |
| Service Level  |                                                | Shp.Cond.                                                                   |                                |            |        |
| Container ID   | SAFEXPRESS Pvt.Ltd.                            | Spec. Process.                                                              |                                |            |        |
| AlwdTotWgt     | 0                                              | KG                                                                          | External ID 1                  |            |        |


Deadl. Further Dates Stages Partner Texts Duration and Distnce Status Tender Addit

| Planning         |  |       | Execution  |       |   |
|------------------|--|-------|------------|-------|---|
| Check-in         |  | 00:00 | 13.10.2017 | 17:07 | ✓ |
| Loading start    |  | 00:00 | 13.10.2017 | 17:08 | ✓ |
| Loading end      |  | 00:00 | 13.10.2017 | 17:08 | ✓ |
| Shpmt completion |  | 00:00 | 13.10.2017 | 17:08 | ✓ |
| Shipment start   |  | 00:00 |            | 00:00 |   |
| Shipment end     |  | 00:00 |            | 00:00 |   |


Planning  
Check-in  
Loading start  
Loading end  
Shpmt completion  
Shipment start  
Shipment end

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

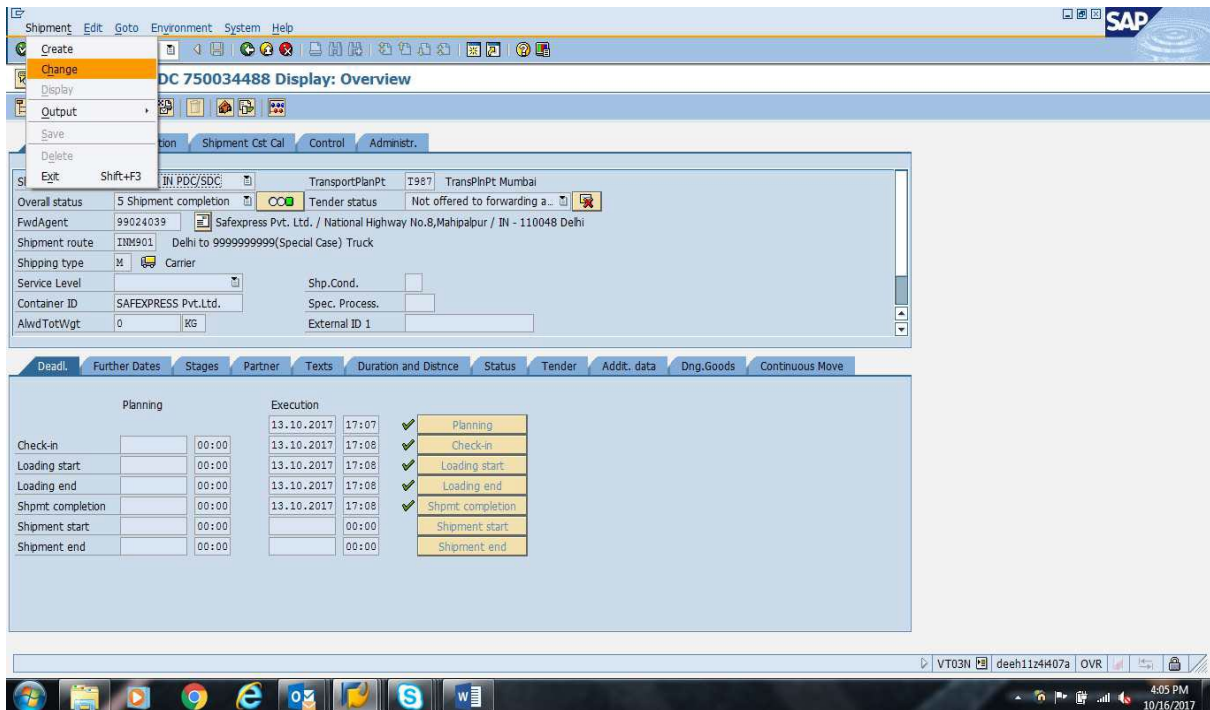

You will get the screen like below, press enter

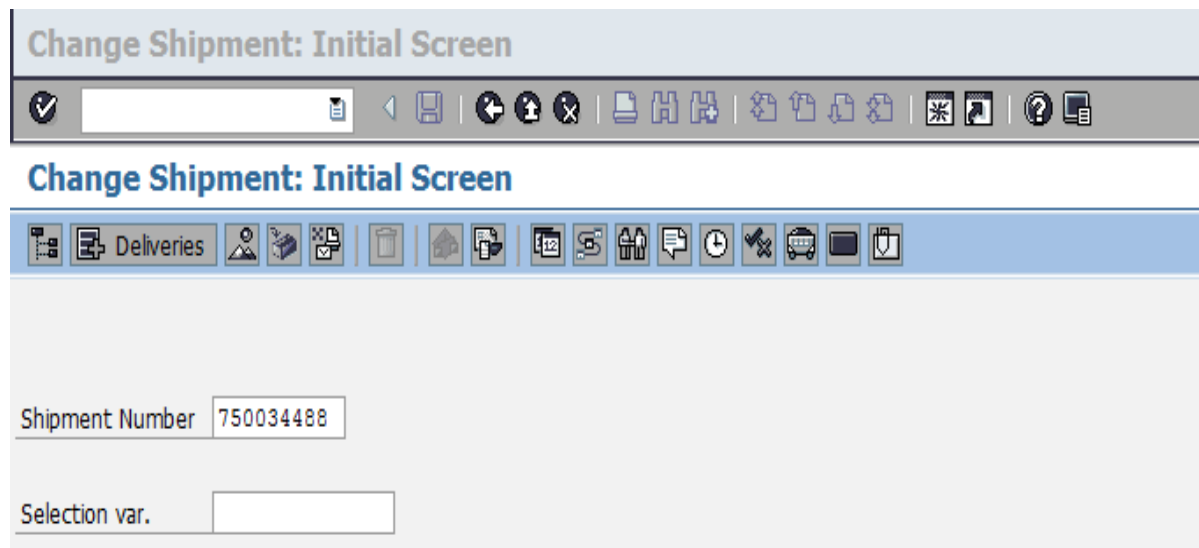

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Shipment Edit Goto Environment System Help

**A5 IN PDC/SDC 750034488 Change: Overview**

Processing Identification Shipment Cst Cal Control Administr.

Shipment type: 2013 A5 IN PDC/SDC TransportPlanPt: T987 TransPnPt: Mumbai  
Overall status: 5 Shipment completion COO Tender status: Not offered to forwarding a...  
FwdAgent: 99024039 Safexpress Pvt. Ltd. / National Highway No.8, Mahipalpur / IN - 110048 Delhi  
Shipment route: INM901 Delhi to 9999999999(Special Case) Truck  
Shipping type: M Carrier  
Service Level: Shp.Cond. Spec. Process.  
Container ID: SAFEXPRESS Pvt.Ltd. External ID 1  
AlwdTotWgt: KG

Deadl. Further Dates Stages Partner Texts Duration and Distnce Status Tender Addit. data Dng.Goods Continuous Move

| Planning         |  |       | Execution  |       |                    |
|------------------|--|-------|------------|-------|--------------------|
| Check-in         |  | 00:00 | 13.10.2017 | 17:07 | ✓ Planning         |
| Loading start    |  | 00:00 | 13.10.2017 | 17:08 | ✓ Check-in         |
| Loading end      |  | 00:00 | 13.10.2017 | 17:08 | ✓ Loading start    |
| Shpmt completion |  | 00:00 | 13.10.2017 | 17:08 | ✓ Loading end      |
| Shipment start   |  | 00:00 |            | 00:00 | ✓ Shpmt completion |
| Shipment end     |  | 00:00 |            | 00:00 | Shipment start     |
|                  |  |       |            |       | Shipment end       |

VT02N deeh11z4H07a OVR 4:07 PM 10/16/2017

Screen will appear like this (Please untick all click button) after that you can see below screen.

Shipment Edit Goto Environment System Help

**A5 IN PDC/SDC 750034488 Change: Overview**

Processing Identification Shipment Cst Cal Control Administr.

Shipment type: 2013 A5 IN PDC/SDC TransportPlanPt: T987 TransPnPt: Mumbai  
Overall status: 0 Planned COO Tender status: Not offered to forwarding a...  
FwdAgent: 99024039 Safexpress Pvt. Ltd. / National Highway No.8, Mahipalpur / IN - 110048 Delhi  
Shipment route: INM901 Delhi to 9999999999(Special Case) Truck  
Shipping type: M Carrier  
Service Level: Shp.Cond. Spec. Process.  
Container ID: SAFEXPRESS Pvt.Ltd. External ID 1  
AlwdTotWgt: KG

Deadl. Further Dates Stages Partner Texts Duration and Distnce Status Tender Addit. data Dng.Goods Continuous Move

| Planning         |  |       | Execution |       |                  |
|------------------|--|-------|-----------|-------|------------------|
| Check-in         |  | 00:00 |           | 00:00 | Planning         |
| Loading start    |  | 00:00 |           | 00:00 | Check-in         |
| Loading end      |  | 00:00 |           | 00:00 | Loading start    |
| Shpmt completion |  | 00:00 |           | 00:00 | Loading end      |
| Shipment start   |  | 00:00 |           | 00:00 | Shpmt completion |
| Shipment end     |  | 00:00 |           | 00:00 | Shipment start   |
|                  |  |       |           |       | Shipment end     |

Start VT02N deeh11z4H07a OVR 4:08 PM 10/16/2017

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**A5 IN PDC/SDC 750034488 Change: Overview**

Deliveries

Processing Identification Shipment Cst Cal Control Administr.

Shipment type: Z013 A5 IN PDC/SDC TransportPlanPt: T987 TransPlnPt: Mumbai  
Overall status: 0 Planned Tender status: Not offered to forwarding a...  
FwdAgent: 99024039 Safexpress Pvt. Ltd. / National Highway No.8, Mahipalpur / IN - 110048 Delhi  
Shipment route: INM901 Delhi to 9999999999(Special Case) Truck  
Shipping type: M Carrier  
Service Level: Shp.Cond.:  
Container ID: SAFEXPRESS Pvt.Ltd. Spec. Process.:  
AlwdTotWgt: KG External ID 1:

Deadl. Further Dates Stages Partner Texts Duration and Distnce Status Tender A

Planning Execution

| Check-in         |  | 00:00 |  | 00:00 | Planning         |
|------------------|--|-------|--|-------|------------------|
| Loading start    |  | 00:00 |  | 00:00 | Check-in         |
| Loading end      |  | 00:00 |  | 00:00 | Loading start    |
| Shpmt completion |  | 00:00 |  | 00:00 | Loading end      |
| Shipment start   |  | 00:00 |  | 00:00 | Shpmt completion |
| Shipment end     |  | 00:00 |  | 00:00 | Shipment start   |
|                  |  |       |  |       | Shipment end     |

Transport Edit Goto Environment System Help

**A5 IN PDC/SDC 750034488 Change: Shipments and Deliveries**

Deliveries Planning Selection Log Split Deliveries Shipments

| Shipments and deliveries | OverallSta | Deliv.Date | ShpmtRoute | S | Address         | ShpToParty         | Volume/M3 | Total wght/KG |
|--------------------------|------------|------------|------------|---|-----------------|--------------------|-----------|---------------|
| 0750034488               | 000        |            | INM901     |   |                 |                    | 0.545     | 136.2         |
| 0360160701               |            | 14.10.2017 | INM901     | M | IN 201301 Noida | Tv18 Broadcast Ltd | 0.545     | 136.2         |

Deliveries not assigned

| Deliveries not assigned          | OverallSta | Deliv.Date | ShpmtRoute | S | Address | ShpToParty | Volume/M3 | Total wght/KG | Ship Point |
|----------------------------------|------------|------------|------------|---|---------|------------|-----------|---------------|------------|
| Total of deliveries not assigned |            |            |            |   |         |            |           |               |            |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Now select the delivery no. and press the button Remove Delivery from Shipment.

The screenshot shows the SAP A5 IN PDC/SDC 750034488 Change: Shipments and Deliveries screen. The 'Shipments and deliveries' table has the following data:

| Shipments and deliveries | Deliv.Date | ShpmtRoute | S | Address         | ShpToParty         | Volume/M3 | Total wght/KG |
|--------------------------|------------|------------|---|-----------------|--------------------|-----------|---------------|
| 075003448                | 14.10.2017 | INM901     | M | IN 201301 Noida | Tv18 Broadcast Ltd | 0.545     | 136.2         |
| 0360160701               | 14.10.2017 | INM901     | M | IN 201301 Noida | Tv18 Broadcast Ltd | 0.545     | 136.2         |

The 'Deliveries not assigned' table is empty. The status bar at the bottom indicates 'Route INM901 has no valid legs'.

The screenshot shows the SAP A5 IN PDC/SDC 750034488 Change: Shipments and Deliveries screen. The 'Shipments and deliveries' table has the following data:



| Shipments and deliveries | OverallSta | Deliv.Date | ShpmtRoute | S | Address | ShpToParty | Volume/M3 | Total wght/KG |
|--------------------------|------------|------------|------------|---|---------|------------|-----------|---------------|
| 075003448                | 00         |            | INM901     |   |         |            |           |               |

The 'Deliveries not assigned' table has the following data:

| Deliveries not assigned | OverallSta | Deliv.Date | ShpmtRoute | S | Address         | ShpToParty       | Volume/M3 | Total wght/KG | Ship Point |
|-------------------------|------------|------------|------------|---|-----------------|------------------|-----------|---------------|------------|
| 0360160701              |            | 14.10.2017 | INM901     | M | IN 201301 Noida | Tv18 Broadcas... | 0.545     | 136.275       | D987       |


# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

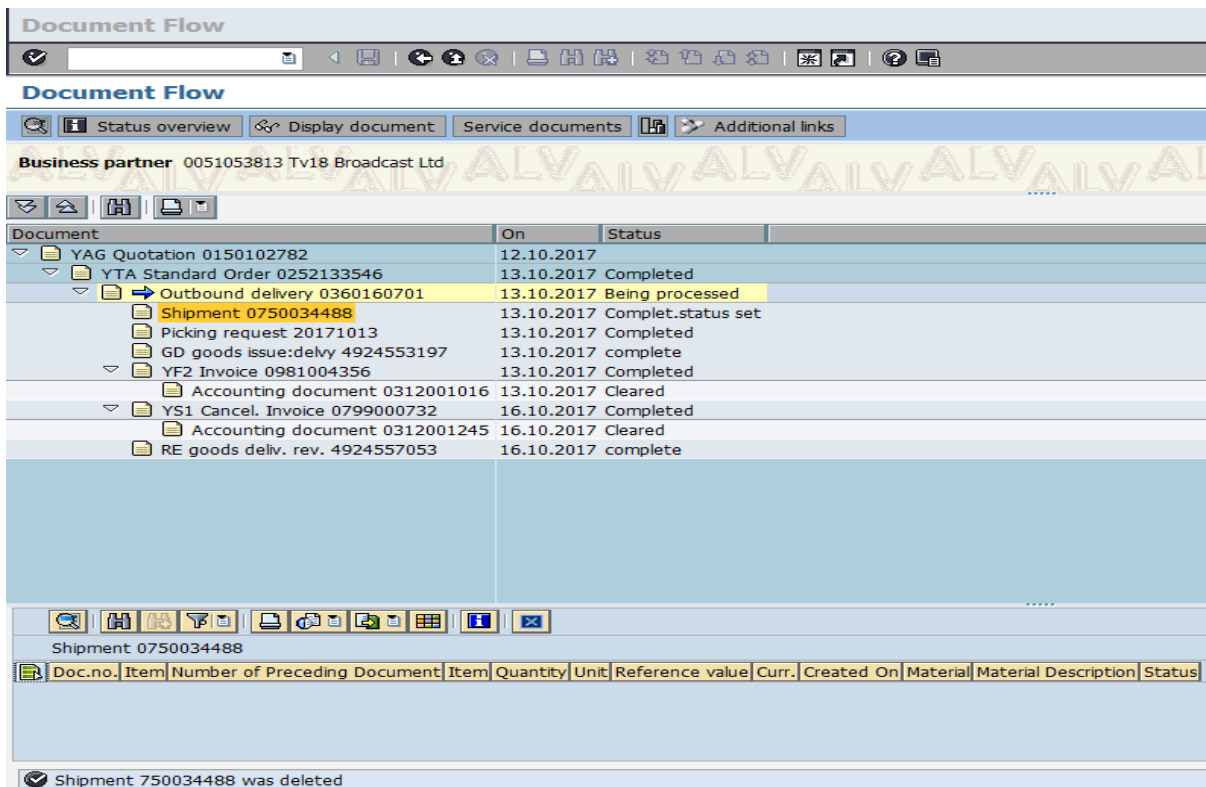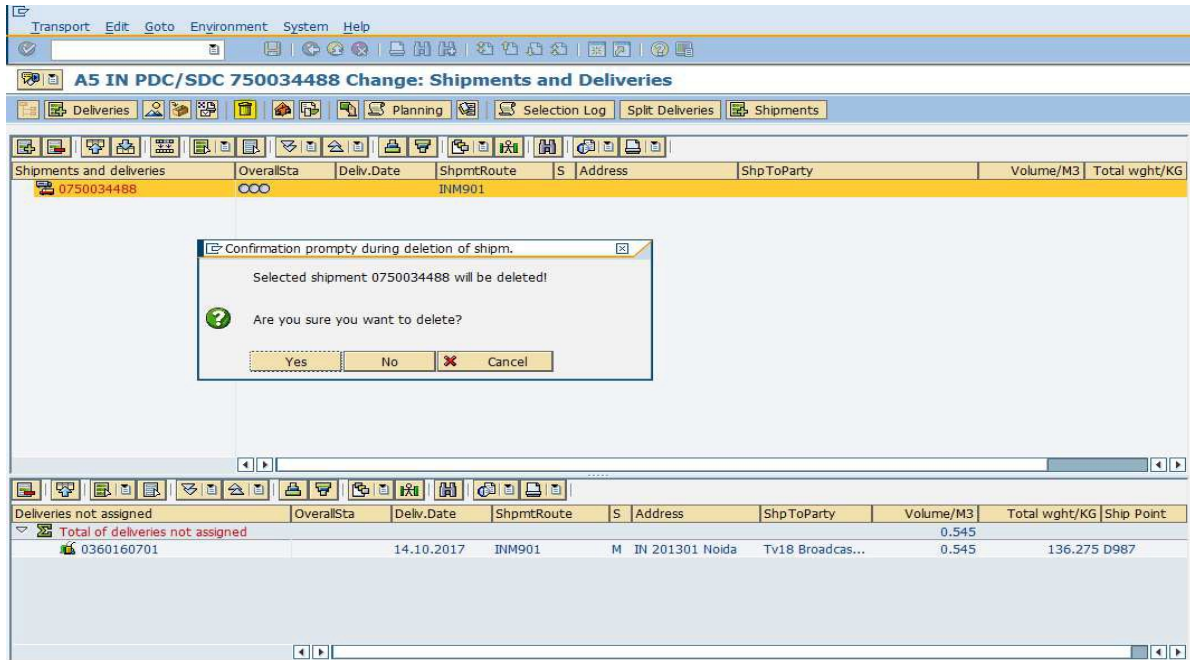


# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

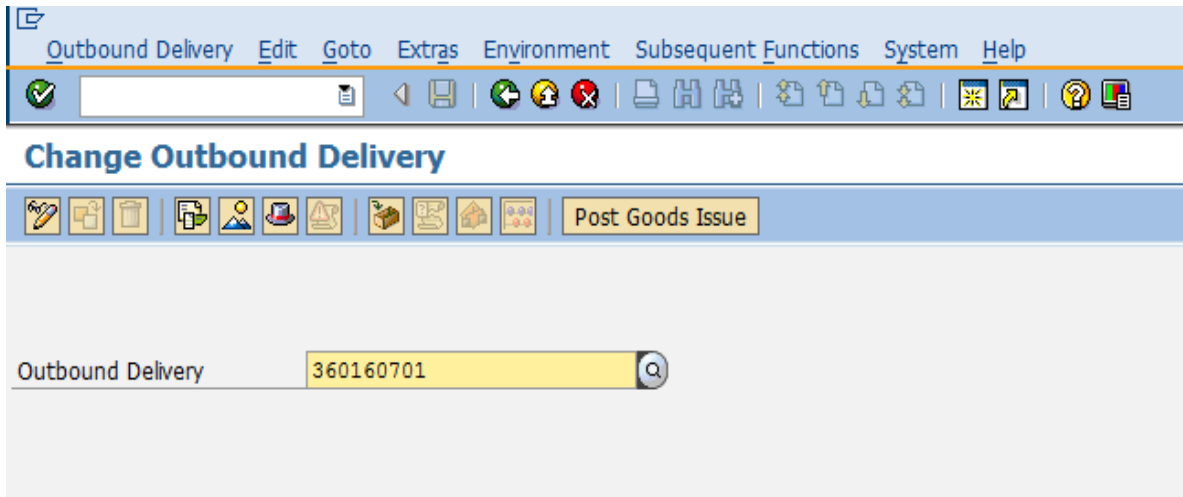

The screenshot shows the SAP 'Change Outbound Delivery' screen. The menu bar includes 'Outbound Delivery', 'Edit', 'Goto', 'Extras', 'Environment', 'Subsequent Functions', 'System', and 'Help'. The toolbar contains various icons for navigation and actions. Below the title bar, there is a search field with the value '360160701' and a magnifying glass icon. The 'Post Goods Issue' button is visible on the right.

Now press enter and go to Picking Tab

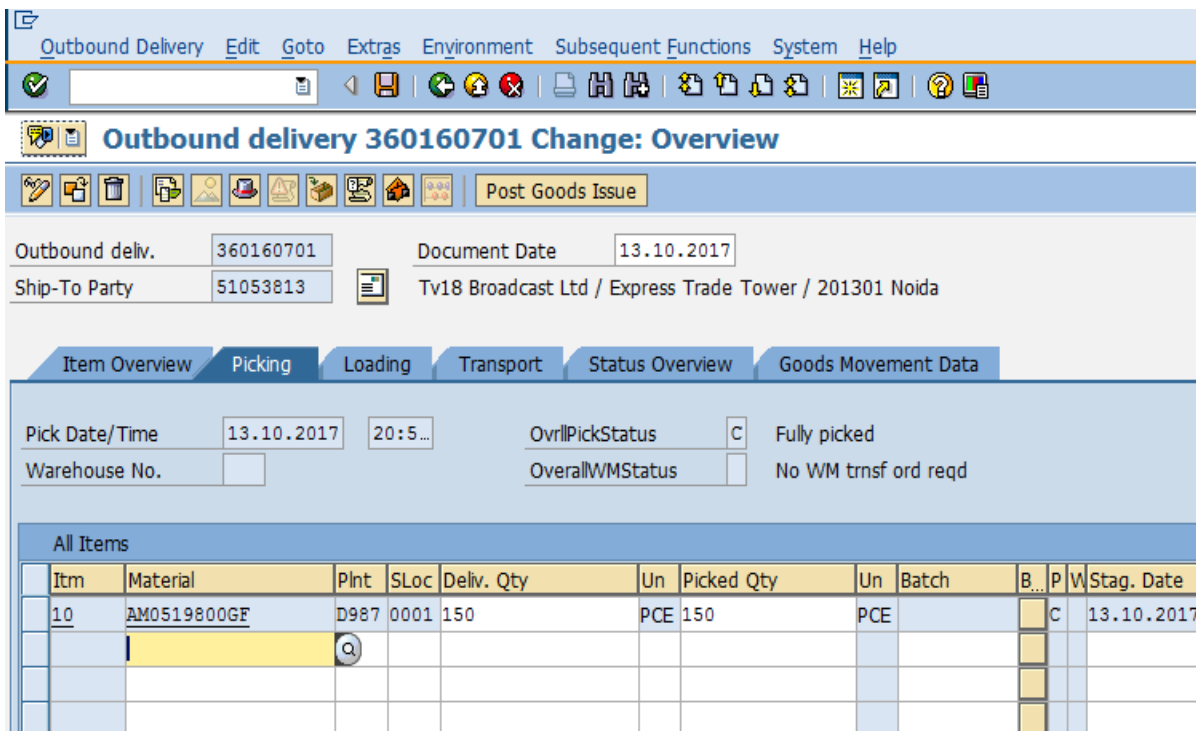

The screenshot shows the 'Outbound delivery 360160701 Change: Overview' screen. The menu bar is the same as the previous screen. The toolbar includes a 'Post Goods Issue' button. The main area displays the following information:

Outbound deliv. 360160701 Document Date 13.10.2017  
Ship-To Party 51053813 Tv18 Broadcast Ltd / Express Trade Tower / 201301 Noida

The 'Picking' tab is selected, showing the following details:

Pick Date/Time 13.10.2017 20:5... OvrllPickStatus C Fully picked  
Warehouse No. OverallWMStatus No WM trnsf ord reqd

The 'All Items' table is displayed below:

| Item | Material    | Plnt | SLoc | Deliv. Qty | Un  | Picked Qty | Un  | Batch | B... | P | V | Stag. Date |
|------|-------------|------|------|------------|-----|------------|-----|-------|------|---|---|------------|
| 10   | AM0519800GF | D987 | 0001 | 150        | PCE | 150        | PCE |       |      | C |   | 13.10.2017 |
|      |             |      |      |            |     |            |     |       |      |   |   |            |
|      |             |      |      |            |     |            |     |       |      |   |   |            |
|      |             |      |      |            |     |            |     |       |      |   |   |            |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Outbound delivery 360160701 Change: Overview**

Outbound deliv.  Document Date   
Ship-To Party  Tv18 Broadcast Ltd / Express Trade Tower / 201301 Noida

Item Overview **Picking** Loading Transport Status Overview Goods Movement Data

Pick Date/Time   OvrllPickStatus  Not yet picked  
Warehouse No.  OverallWMStatus  No WM trnsf ord reqd

All Items

| Itm | Material    | Plnt | SLoc | Deliv. Qty | Un  | Picked Qty | Un  | Batch | B... | P | V |
|-----|-------------|------|------|------------|-----|------------|-----|-------|------|---|---|
| 10  | AM0519800GF | D987 | 0001 | 150        | PCE |            | PCE |       |      | A |   |

**Outbound delivery 360160701 Change: Overview**

Outbound deliv.  Document Date   
Ship-To Party  Tv18 Broadcast Ltd / Express Trade Tower / 201301 Noida

Item Overview **Picking** Loading Transport Status Overview Goods Movement Data

Pick Date/Time   OvrllPickStatus  Not yet picked  
Warehouse No.  OverallWMStatus  No WM trnsf ord reqd

All Items

| Itm | Material    | Plnt | SLoc | Deliv. Qty | Un  | Picked Qty | Un  | Batch | B... | P | V | Stag. Date | Matl... |
|-----|-------------|------|------|------------|-----|------------|-----|-------|------|---|---|------------|---------|
| 10  | AM0519800GF | D987 | 0001 | 150        | PCE |            | PCE |       |      | A |   | 13.10.2017 | 20:5... |

Delete Delivery Processing

Do you really want  
360160701 to delete?

Yes No Cancel

Batch Split Main items All items

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Outbound Delivery 360160701 Change: Overview

Post Goods Issue

Outbound deliv. 360160701 Document Date 13.10.2017

Ship-To Party 51053813 Tv18 Broadcast Ltd / Express Trade Tower / 201301 Noida

Item Overview Picking Loading Transport Status Overview Goods Movement Data

Pick Date/Time 13.10.2017 20:5... OvrllPickStatus A Not yet picked

Warehouse No. OverallWMStatus No WM trnsf ord reqd

| Itm | Material    | Plnt | SLoc | Deliv. Qty | Un  | Picked Qty | Un  | Batch | B... | P | W |
|-----|-------------|------|------|------------|-----|------------|-----|-------|------|---|---|
| 10  | AM0519800GF | D987 | 0001 | 150        | PCE |            | PCE |       |      | A |   |

Delete Items

Warnings Exist  
Delete Items Anyway?

Delete Log Cancel

Batch Split Main items All items

Then write to HO – Logistics (Rampal Rathi & Pavan Pathak) for getting the SO Closed so as Outbound Delivery is not made again.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### 30. Material Block, Unblock in sap system & location Transfer:

Use Sap T-code: MB1B

Then you will below sap screen after that Please put Plant & movement type 344, Storage location as per current location of material in system.

The screenshot displays the SAP MB1B 'Enter Transfer Posting: Initial Screen'. At the top, there is a title bar 'Enter Transfer Posting: Initial Screen' with a standard SAP toolbar. Below the title bar, there are four buttons: 'New Item', 'To Reservation...', 'To Purchase Order...', and 'WM Parameters...'. The main area contains several input fields: 'Document Date' (16.10.2017), 'Posting Date' (16.10.2017), 'Material Slip' (empty), and 'Doc.Header Text' (empty). Below these is a section titled 'Defaults for Document Items' with a light blue background. It contains two columns of fields: 'Movement Type' (344), 'Plant' (D987), 'Storage Location' (0001), 'Special Stock' (checkbox), 'Reason for Movement' (empty), and 'Suggest Zero Lines' (checkbox). At the bottom is a section titled 'GR/GI Slip' with a light blue background. It contains a 'Print' checkbox (checked) and three radio button options: 'Individual Slip', 'Indiv.Slip w.Inspect.Text', and 'Collective Slip' (selected).

|                                           |                                                  |                                             |                          |
|-------------------------------------------|--------------------------------------------------|---------------------------------------------|--------------------------|
| Document Date                             | 16.10.2017                                       | Posting Date                                | 16.10.2017               |
| Material Slip                             |                                                  |                                             |                          |
| Doc.Header Text                           |                                                  |                                             |                          |
| <b>Defaults for Document Items</b>        |                                                  |                                             |                          |
| Movement Type                             | 344                                              | Special Stock                               | <input type="checkbox"/> |
| Plant                                     | D987                                             | Reason for Movement                         | <input type="text"/>     |
| Storage Location                          | 0001                                             | <input type="checkbox"/> Suggest Zero Lines |                          |
| <b>GR/GI Slip</b>                         |                                                  |                                             |                          |
| <input checked="" type="checkbox"/> Print | <input type="radio"/> Individual Slip            |                                             |                          |
|                                           | <input type="radio"/> Indiv.Slip w.Inspect.Text  |                                             |                          |
|                                           | <input checked="" type="radio"/> Collective Slip |                                             |                          |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Enter Transfer Posting: New Items**

**Enter Transfer Posting: New Items**

**To Reservation...** **To Order...** **To Purchase Order...**

Movement Type **344** TR blocked to unre.  
Iss. SLoc.

**Items**

| Item | Material             | Quantity             | UnE                  | SLoc | Batch                | Re                   | Plnt |
|------|----------------------|----------------------|----------------------|------|----------------------|----------------------|------|
| 1    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 2    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 3    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 4    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 5    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 6    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 7    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 8    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 9    | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |
| 10   | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0001 | <input type="text"/> | <input type="text"/> | D987 |

Then Please put material code & qty. location

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Transfer Posting Edit Goto Movement Type Environment System Help

Enter Transfer Posting: New Items

To Reservation... To Order... To Purchase Order...

Movement Type 344 TR blocked to unre.  
Iss. SLoc.

| Item | Material    | Quantity | UnE | SLoc | Batch | Re | Plnt |
|------|-------------|----------|-----|------|-------|----|------|
| 1    | AA724580002 | 720      |     | 0001 |       |    | D987 |
| 2    | A3892410272 | 7200     |     | 0001 |       |    | D987 |
| 3    |             |          |     | 0001 |       |    | D987 |
| 4    |             |          |     | 0001 |       |    | D987 |
| 5    |             |          |     | 0001 |       |    | D987 |
| 6    |             |          |     | 0001 |       |    | D987 |
| 7    |             |          |     | 0001 |       |    | D987 |
| 8    |             |          |     | 0001 |       |    | D987 |
| 9    |             |          |     | 0001 |       |    | D987 |
| 10   |             |          |     | 0001 |       |    | D987 |

Enter Transfer Posting: Collective Processing

To Reservation... To Order... To Purchase Order...

Movement Type 344 TR blocked to unre.  
Iss. SLoc. 0001

| Item | Material    | Quantity | UnE | SLoc | Batch | Re | Plnt |
|------|-------------|----------|-----|------|-------|----|------|
| 1    | AA724580002 | 720      | PCE | 0001 |       |    | D987 |
| 2    | A3892410272 | 7,200    | PCE | 0001 |       |    | D987 |
| 3    |             |          |     | 0001 |       |    | D987 |
| 4    |             |          |     | 0001 |       |    | D987 |
| 5    |             |          |     | 0001 |       |    | D987 |
| 6    |             |          |     | 0001 |       |    | D987 |
| 7    |             |          |     | 0001 |       |    | D987 |
| 8    |             |          |     | 0001 |       |    | D987 |
| 9    |             |          |     | 0001 |       |    | D987 |
| 10   |             |          |     | 0001 |       |    | D987 |

Entry 1 of 2

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Enter Transfer Posting: Initial Screen**

Document Date: 16.10.2017      Posting Date: 16.10.2017

Material Slip:

Doc.Header Text:

**Defaults for Document Items**

|                  |      |                                             |                          |
|------------------|------|---------------------------------------------|--------------------------|
| Movement Type    | 344  | Special Stock                               | <input type="checkbox"/> |
| Plant            | D987 | Reason for Movement                         | <input type="text"/>     |
| Storage Location | 0001 | <input type="checkbox"/> Suggest Zero Lines |                          |

**GR/GI Slip**

☒ Print      ☐ Individual Slip  
☐ Individ.Slip w.Inspect.Text  
☒ Collective Slip

Document 4924557115 posted

Location Transfer in sap One location to another location by using movement type 325.

**Enter Transfer Posting: Initial Screen**

Document Date: 16.10.2017      Posting Date: 16.10.2017

Material Slip:

Doc.Header Text:

**Defaults for Document Items**

|                  |      |                                             |                          |
|------------------|------|---------------------------------------------|--------------------------|
| Movement Type    | 325  | Special Stock                               | <input type="checkbox"/> |
| Plant            | D987 | Reason for Movement                         | <input type="text"/>     |
| Storage Location | 0001 | <input type="checkbox"/> Suggest Zero Lines |                          |

**GR/GI Slip**

☒ Print      ☐ Individual Slip  
☐ Individ.Slip w.Inspect.Text  
☒ Collective Slip

and press Enter

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Enter Transfer Posting: New Items**



**Enter Transfer Posting: New Items**

   **To Reservation...** **To Order...** **To Purchase Order...**

Movement Type  TF blocked in plant  
Recipient   
Rcvg SLoc

**Items**

| Item | Material    | Quantity | UnE | SLoc | Batch | Re   | Plnt |
|------|-------------|----------|-----|------|-------|------|------|
| 1    | AA724580002 | 720      |     | 0001 |       | D987 |      |
| 2    | A3892410272 | 7200     |     | 0001 |       | D987 |      |
| 3    |             |          |     | 0001 |       | D987 |      |
| 4    |             |          |     | 0001 |       | D987 |      |
| 5    |             |          |     | 0001 |       | D987 |      |
| 6    |             |          |     | 0001 |       | D987 |      |
| 7    |             |          |     | 0001 |       | D987 |      |
| 8    |             |          |     | 0001 |       | D987 |      |
| 9    |             |          |     | 0001 |       | D987 |      |
| 10   |             |          |     | 0001 |       | D987 |      |

**Enter Transfer Posting: Collective Processing**



**Enter Transfer Posting: Collective Processing**

   **To Reservation...** **To Order...** **To Purchase Order...**

Movement Type  TF blocked in plant  
Rcvg SLoc

**Items**

| Item | Material    | Quantity | UnE | SLoc | Batch | Re   | Plnt |
|------|-------------|----------|-----|------|-------|------|------|
| 1    | AA724580002 | 720      | PCE | 0001 |       | D987 |      |
| 2    | A3892410272 | 7,200    | PCE | 0001 |       | D987 |      |
| 3    |             |          |     | 0001 |       | D987 |      |
| 4    |             |          |     | 0001 |       | D987 |      |
| 5    |             |          |     | 0001 |       | D987 |      |
| 6    |             |          |     | 0001 |       | D987 |      |
| 7    |             |          |     | 0001 |       | D987 |      |
| 8    |             |          |     | 0001 |       | D987 |      |
| 9    |             |          |     | 0001 |       | D987 |      |
| 10   |             |          |     | 0001 |       | D987 |      |

Entry  of

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Enter Transfer Posting: Initial Screen**

Document Date: 16.10.2017      Posting Date: 16.10.2017

Material Slip:

Doc.Header Text:

**Defaults for Document Items**

|                  |      |                                             |                          |
|------------------|------|---------------------------------------------|--------------------------|
| Movement Type    | 325  | Special Stock                               | <input type="checkbox"/> |
| Plant            | D987 | Reason for Movement                         | <input type="text"/>     |
| Storage Location | 0001 | <input type="checkbox"/> Suggest Zero Lines |                          |

**GR/GI Slip**

☒ Print

☐ Individual Slip  
☐ Indiv.Slip w.Inspect.Text  
☒ Collective Slip

Document 4924557116 posted

### 31. MB1B—for material unblocking purpose in SAP.

Put Mvt Type, Plant – Your Plant D\*\*\*, and Storage Location – From Where you need to unblock

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Enter Transfer Posting: Initial Screen**

**Enter Transfer Posting: Initial Screen**

Document Date  Posting Date

Material Slip

Doc.Header Text

**Defaults for Document Items**

|                  |                                   |                                             |                          |
|------------------|-----------------------------------|---------------------------------------------|--------------------------|
| Movement Type    | <input type="text" value="343"/>  | Special Stock                               | <input type="checkbox"/> |
| Plant            | <input type="text" value="D992"/> | Reason for Movement                         | <input type="text"/>     |
| Storage Location | <input type="text" value="b103"/> | <input type="checkbox"/> Suggest Zero Lines |                          |

**GR/GI Slip**

☒ Print

☐ Individual Slip

☐ Indiv.Slip w.Inspect.Text

☒ Collective Slip

Press Enter.

Put Rcvg Sloc – 0001

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

Put IC and Qty (Qty to be unblocked)

Enter Transfer Posting: New Items

Enter Transfer Posting: New Items

To Reservation... To Order... To Purchase Order...

Movement Type 343 TF blocked to unre.  
Rcvg SLoc 0001

| Item | Material    | Quantity | UnE | SLoc | Batch | Re | Plnt |
|------|-------------|----------|-----|------|-------|----|------|
| 1    | A4834330202 | 5000     |     | BL03 |       |    | D992 |
| 2    |             |          |     | BL03 |       |    | D992 |
| 3    |             |          |     | BL03 |       |    | D992 |
| 4    |             |          |     | BL03 |       |    | D992 |
| 5    |             |          |     | BL03 |       |    | D992 |
| 6    |             |          |     | BL03 |       |    | D992 |
| 7    |             |          |     | BL03 |       |    | D992 |
| 8    |             |          |     | BL03 |       |    | D992 |
| 9    |             |          |     | BL03 |       |    | D992 |
| 10   |             |          |     | BL03 |       |    | D992 |

Enter Transfer Posting: New Items

Enter Transfer Posting: New Items

To Reservation... To Order... To Purchase Order...

Movement Type 343 TF blocked to unre.  
Rcvg SLoc 0001

| Item | Material    | Quantity | UnE | SLoc | Batch | Re | Plnt |
|------|-------------|----------|-----|------|-------|----|------|
| 1    | A4834330202 | 5000     |     | BL03 |       |    | D992 |
| 2    |             |          |     | BL03 |       |    | D992 |
| 3    |             |          |     | BL03 |       |    | D992 |
| 4    |             |          |     | BL03 |       |    | D992 |
| 5    |             |          |     | BL03 |       |    | D992 |
| 6    |             |          |     | BL03 |       |    | D992 |
| 7    |             |          |     | BL03 |       |    | D992 |
| 8    |             |          |     | BL03 |       |    | D992 |
| 9    |             |          |     | BL03 |       |    | D992 |
| 10   |             |          |     | BL03 |       |    | D992 |

Press Enter and Save

32. E-way Bill:

### 32.1 Overview—Business description

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### Outward data for E-way bill

- Extract outward delivery data and invoice data and send to E-way bill portal to generate E-way bill number.
- Update E-way bill number to SAP system and print out in invoice.

### Inward data for E-way bill

- Extract intercompany vendor inward delivery data and vendor invoice number and send to clearing and forwarding agents for applicate E-way bill number.


## 32.2 Scope:

Company: 1080

Function Unit: Extract outward/inward data for E-way bill number generation

## 32.3 Process


- Outward process

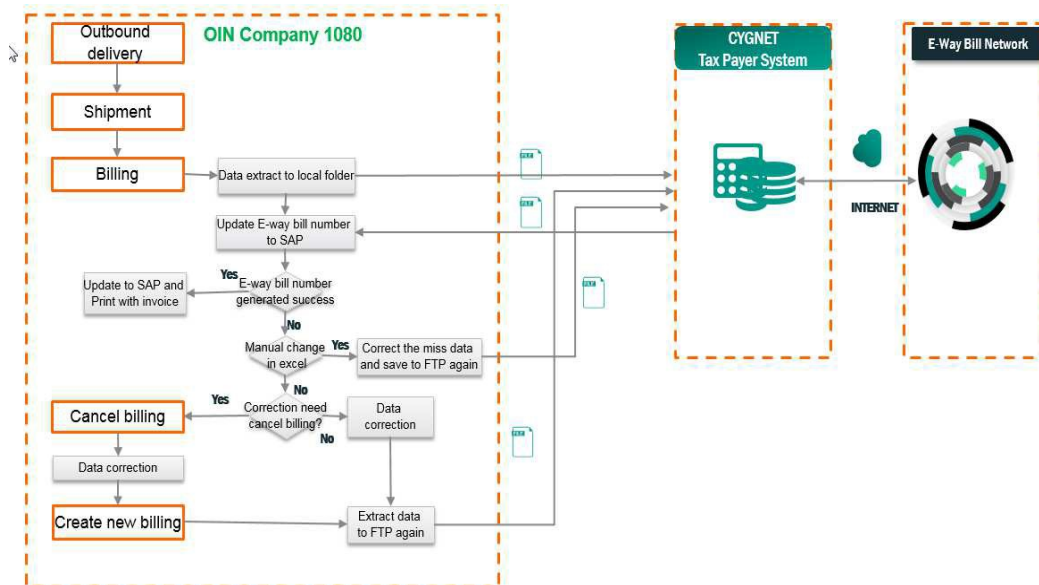

- Inward process

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

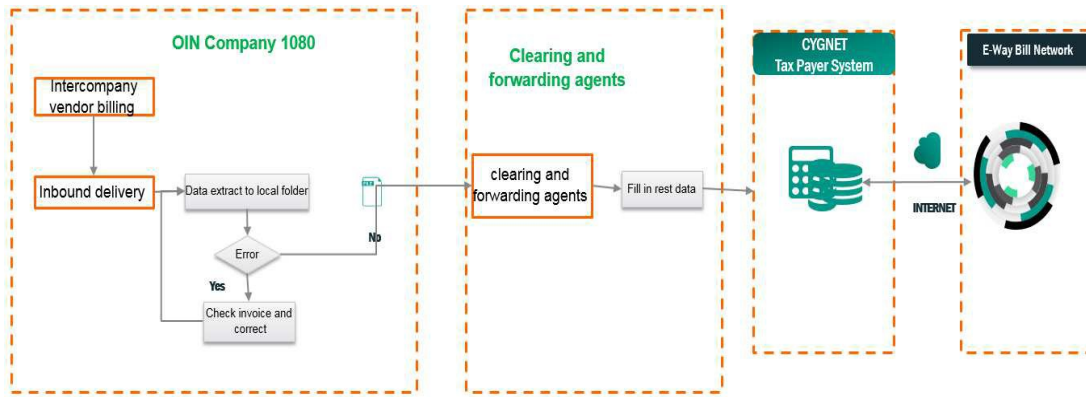

### 32.4 Maintain master data

(a) T-code: ZLE85\_T205, click button “” to maintain E-way bill unit conversion.

The screenshot shows the SAP Display View for 'Eway Bill unit conversion.' The table lists various units and their corresponding counters.

|     | +   | + | Deno... | Counter |
|-----|-----|---|---------|---------|
| BAG | NOS | 1 |         | 1       |
| BLI | NOS | 1 |         | 1       |
| FHS | NOS | 1 |         | 1       |
| FLH | NOS | 1 |         | 1       |
| FS  | NOS | 1 |         | 1       |
| PCE | NOS | 1 |         | 1       |
| RWL | NOS | 1 |         | 1       |
| UNV | NOS | 1 |         | 1       |
| VS  | NOS | 1 |         | 1       |

(b) T-code: ZLE85\_T206, click button “” to maintain E-way bill transport mode.


The screenshot shows the SAP Display View for 'Eway bill Transport Mode'. The table lists various transport modes and their corresponding field names.

| ITYPE | M             | Field name |
|-------|---------------|------------|
| A     | 1 Street      | ROAD       |
| B     | 1 Street      | ROAD       |
| C     | 3 Sea         | SEA        |
| E     | 1 Street      | ROAD       |
| F     | 6 Air (Cargo) | AIR        |
| L     | 1 Street      | ROAD       |
| M     | 1 Street      | ROAD       |
| N     | 1 Street      | ROAD       |
| O     | 1 Street      | ROAD       |
| P     | 1 Street      | ROAD       |
| U     | 1 Street      | ROAD       |
| V     | 3 Sea         | SEA        |
| W     | 2 Rail        | RAIL       |
| Z     | 1 Street      | ROAD       |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**Display View "Table to maintain Distnace for OIN E way bill": Overview**

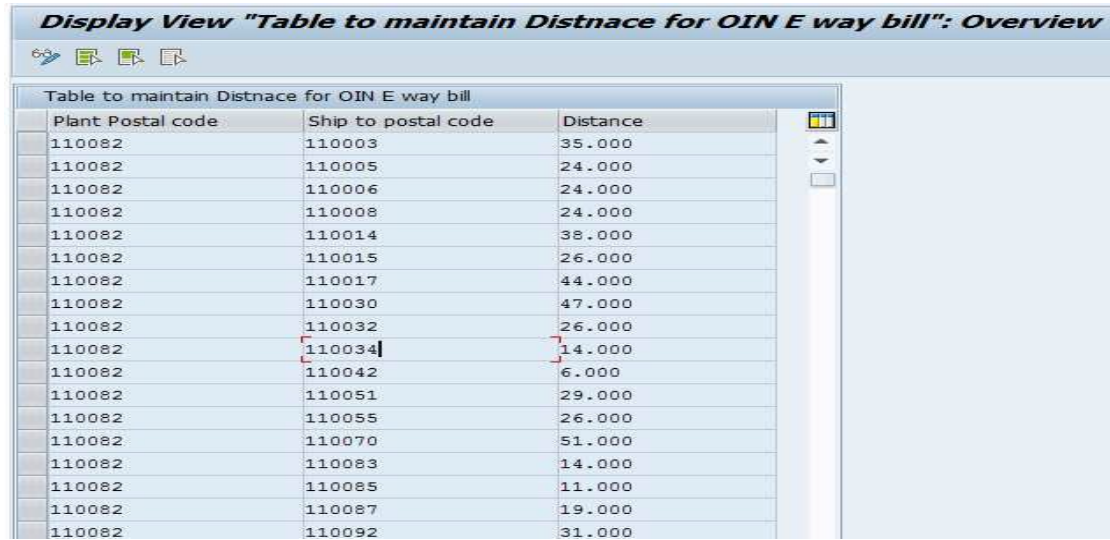


| Plant Postal code | Ship to postal code | Distance |
|-------------------|---------------------|----------|
| 110082            | 110003              | 35.000   |
| 110082            | 110005              | 24.000   |
| 110082            | 110006              | 24.000   |
| 110082            | 110008              | 24.000   |
| 110082            | 110014              | 38.000   |
| 110082            | 110015              | 26.000   |
| 110082            | 110017              | 44.000   |
| 110082            | 110030              | 47.000   |
| 110082            | 110032              | 26.000   |
| 110082            | 110034              | 14.000   |
| 110082            | 110042              | 6.000    |
| 110082            | 110051              | 29.000   |
| 110082            | 110055              | 26.000   |
| 110082            | 110070              | 51.000   |
| 110082            | 110083              | 14.000   |
| 110082            | 110085              | 11.000   |
| 110082            | 110087              | 19.000   |
| 110082            | 110092              | 31.000   |

(c) T-code: ZLE85\_T207, click button “” to maintain distance between different postal code for E-way bill.

(d) T-code: ZLE85\_T208, click button “” to maintain go live date for different state.

**Change View "Eway Bill State table": Overview**

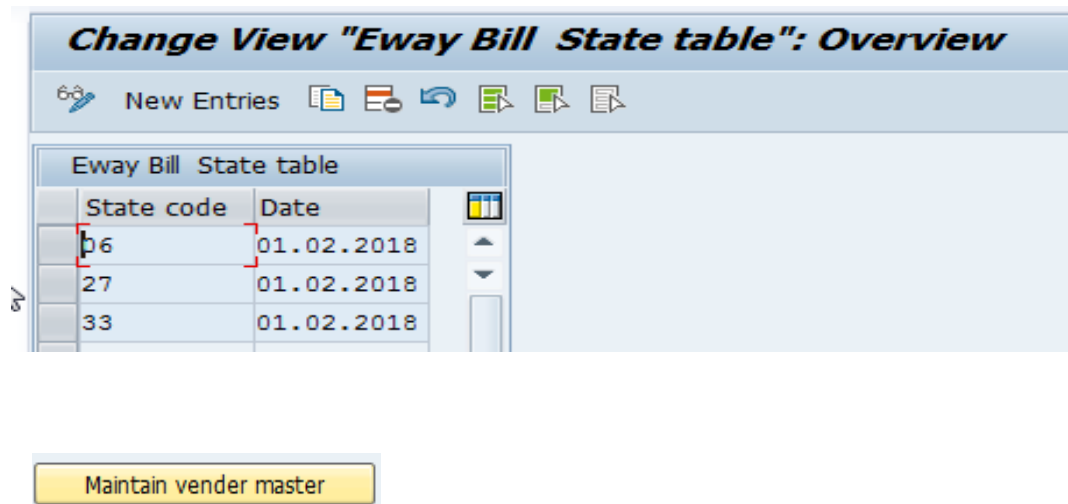

New Entries       

| State code | Date       |
|------------|------------|
| 6          | 01.02.2018 |
| 27         | 01.02.2018 |
| 33         | 01.02.2018 |



Maintain vender master

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

**IB data Extact for E way Bill**

Upload file path: C:\Users\xibin.yu\Desktop\Eway bill\EWayBill\_2840\_05\_...

Maintain vender master

**Display View "India Eway bill vendor destination": Overview**

| Vendor   | Destination            |
|----------|------------------------|
| 2        | 5_050 025 client 050   |
| 13       | NO EDI No EDI vendor   |
| 36       | 085_050 085 client 050 |
| 85       | 085_050 085 client 050 |
| 10006    | 085_050 085 client 050 |
| 10162    | NO EDI No EDI vendor   |
| 10020026 | 085_050 085 client 050 |
| 10020035 | 085_050 085 client 050 |

(e) 4.5: T-code: ZLE85\_T214, click button "" to maintain destination for intercompany vendor.

### 32.5 Download E-way bill data from SAP system

#### Outward E-way bill

T-code: ZLE85\_T200. Outward E-way bill data extract.

- You can entry billing date, billing type, plant or billing number to extract data.
- Once have corresponding record was found, then save data to folder C:\Ewbill.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

- If no data found, then a message screen to show “No data to download”.

**EWAY BILL REPORT**


Sales Organization: 1080

Billing Type: [ ] to: [ ]

Billing Date: 2018.05.29 to: 2018.06.01

Plant: D960

Billing number: [ ] to: [ ]

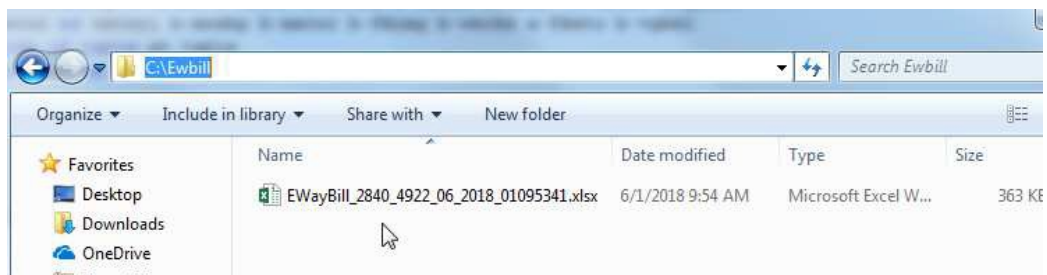

**EWAY BILL REPORT**

EWAY BILL REPORT

No data to download

T-code: ZLE85\_T210. Upload E-way bill number to SAP

**EwayBill number Upload**

Type of Upload

☐ Background Mode

☒ Foreground Mode

File Name for Upload

File name: [ ]

You can select in background mode or foreground mode to upload E-way bill number to SAP. Background mode: will select file from folder:

C:\Ewaybill\OUT\.

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

T-code: ZLE85\_T211. Display and manual change E-way bill number for outward You can display download outward E-way bill data and E-way bill number update in this report.

We have 3 status in the report.



Gray light: Extract data from system, but no update E-way bill data back to system yet.




Green light: Generated E-way bill number successful and update to the system.



Red light: Generated E-way bill number fail and update to the system.

3 operation buttons:



Change button: Switch to change mode, use can manual update the E-way bill Number.



Save button: save change data.

| Eway bill Report                                                                                                                                                       |                 |          |              |               |            |            |        |                   |       |                  |               |                |         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|--------------|---------------|------------|------------|--------|-------------------|-------|------------------|---------------|----------------|---------|
|   |                 |          |              |               |            |            |        |                   |       |                  |               |                |         |
| Exce...                                                                                                                                                                | Billing Numb... | Bilin... | Billing Date | Sold-To Party | EWAY_BILL  | EWAY_DATE  | Fro... | GST Inv           | TO... | Name of Perso... | Last Chang... | Date of Las... | Message |
| 000                                                                                                                                                                    | 600000434       | YF3      | 2018.01.30   | 51033028      |            |            | 33     | G179900000000191  | 33    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 600000435       | YF3      | 2018.01.30   | 51033028      |            |            | 33     | G179900000000192  | 33    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 600000436       | YF3      | 2018.01.30   | 51033028      |            |            | 33     | G179900000000193  | 33    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 601000644       | YF2      | 2018.01.30   | 51053638      |            |            | 33     | A179900000000359  | 33    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 601000645       | YF2      | 2018.01.30   | 51053638      |            |            | 33     | A179900000000360  | 33    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 601000646       | YF3      | 2018.01.30   | 51033026      |            |            | 33     | A179900000000361  | 27    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002290       | YF2      | 2018.01.30   | 51033664      |            |            | 06     | A1798000000006372 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002291       | YF2      | 2018.01.30   | 51033664      |            |            | 06     | A1798000000006373 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002292       | YF2      | 2018.01.30   | 51033664      |            |            | 06     | A1798000000006374 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002293       | YF2      | 2018.01.30   | 51033664      |            |            | 06     | A1798000000006375 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002294       | YF2      | 2018.01.30   | 51033664      |            |            | 06     | A1798000000006376 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002295       | YF2      | 2018.01.30   | 51033664      |            |            | 06     | A1798000000006377 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 930002297       | YF2      | 2018.01.30   | 51052811      |            |            | 06     | A1798000000006449 | 06    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007114       | YF2      | 2018.01.30   | 51053108      |            |            | 06     | A1798000000006370 | 07    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007115       | YF2      | 2018.01.30   | 51053712      | 11232455   | 2018.02.12 | 06     | A1798000000006378 | 09    | K.DWIVEDI        |               |                | Sucess  |
| 000                                                                                                                                                                    | 931007116       | YF2      | 2018.01.30   | 51037298      | 11232455   | 2018.02.29 | 06     | A1798000000006379 | 05    | K.DWIVEDI        |               |                | Sucess  |
| 000                                                                                                                                                                    | 931007117       | YF2      | 2018.01.30   | 51052524      | 4543267    | 2018.03.29 | 06     | A1798000000006380 | 24    | K.DWIVEDI        |               |                | Sucess  |
| 000                                                                                                                                                                    | 931007118       | YF2      | 2018.01.30   | 51052527      | 5463463    | 2018.01.29 | 06     | A1798000000006381 | 08    | K.DWIVEDI        |               |                | Sucess  |
| 000                                                                                                                                                                    | 931007119       | YF2      | 2018.01.30   | 51033690      |            |            | 06     | A1798000000006382 | 08    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007121       | YF2      | 2018.01.30   | 51034814      |            |            | 06     | A1798000000006384 | 19    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007122       | YF2      | 2018.01.30   | 51034814      |            |            | 06     | A1798000000006385 | 19    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007123       | YF2      | 2018.01.30   | 51034581      | 5353634643 | 2018.01.29 | 06     | A1798000000006386 | 23    | K.DWIVEDI        |               |                | Sucess  |
| 000                                                                                                                                                                    | 931007124       | YF2      | 2018.01.30   | 51034681      | 76765667   | 2018.07.29 | 06     | A1798000000006387 | 27    | K.DWIVEDI        |               |                | Sucess  |
| 000                                                                                                                                                                    | 931007125       | YF2      | 2018.01.30   | 51034090      |            |            | 06     | A1798000000006388 | 09    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007126       | YF2      | 2018.01.30   | 51034090      |            |            | 06     | A1798000000006389 | 09    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007127       | YF2      | 2018.01.30   | 51033748      |            |            | 06     | A1798000000006390 | 24    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007128       | YF2      | 2018.01.30   | 51033748      |            |            | 06     | A1798000000006391 | 24    | K.DWIVEDI        |               |                |         |
| 000                                                                                                                                                                    | 931007129       | YF2      | 2018.01.30   | 51053180      |            |            | 06     | A1798000000006392 | 06    | K.DWIVEDI        |               |                | Error1  |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)



Delete button: delete download data.

T-code: VF03. Print E-way bill number in billing form.

Both form ZSD85\_IN\_PRT11 and ZSD85\_IN\_PRT14 will print the E-way bill number.

Page 1 of 1

| Transporter Name                                                                                                                                                                                                                   | LR No. & Date                                                                                           | Truck No. & R.F.N. No. | TAX INVOICE                                                                                                                                                                                                                   |                |                             |                             |                  |             |               |            |                    |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------|-----------------------------|------------------|-------------|---------------|------------|--------------------|------------|
| Blue Dart Express Ltd.                                                                                                                                                                                                             | 50488394423 30.01.2018                                                                                  | HR8SV 0217             | ( Original for Recipient ) UCR 40208857413602006416                                                                                                                                                                           |                |                             |                             |                  |             |               |            |                    |            |
| Invoice No. & Date                                                                                                                                                                                                                 | Internal Doc.                                                                                           | Sales Order No. & Date | Purchase Order No. & Date                                                                                                                                                                                                     | E-Way Bill No. | Payment Terms               |                             |                  |             |               |            |                    |            |
| A17980000006387 & 30.01.2018                                                                                                                                                                                                       | 931007124                                                                                               | 252160469 & 30.01.2018 | mail... & 30.01.2018                                                                                                                                                                                                          | 76765667       | 0074 Within 45 days Due net |                             |                  |             |               |            |                    |            |
| Shipped from Branch Office : OSRAM Lighting Pvt. Ltd.<br>Via Bala Logistics, Shreeva No. 5/43/1/14/15/1, Vidyanagar, Gurgaon, 122001, Haryana<br>GSTIN : 06AAC00571C117 PAN No. : AACCO971C<br>State Code : 06                     |                                                                                                         |                        | SOLD TO : 51834081<br>Transco. Bala Logistics Ltd.<br>M/V No. Unit No.342, Sapsa, Andheri (East), Mumbai, 400092, Maharashtra<br>GSTIN : 27AAACT2038C225<br>Cust's Vendor No. : Place of supply : Maharashtra State Code : 27 |                |                             |                             |                  |             |               |            |                    |            |
| SHIP TO : 51834081<br>Transco. Bala Logistics Ltd.<br>M/V No. Unit No.342, Sapsa, Andheri (East), Mumbai, 400092, Maharashtra<br>GSTIN : 27AAACT2038C225<br>Incoterms : CIF Mumbai Place of delivery : Maharashtra State Code : 27 |                                                                                                         |                        |                                                                                                                                                                                                                               |                |                             |                             |                  |             |               |            |                    |            |
| Sr                                                                                                                                                                                                                                 | Description of Goods<br>with SC Code /Cost material /Country of Origin /HSN/SAC Code                    | Weight<br>(Kgs)        | Volume<br>(CBM)                                                                                                                                                                                                               | No of boxes    | Rate of IGST<br>Tax         | Basic Price<br>per Unit(Rs) | Qty.<br>(in Nos) | Gross Value | Cash Discount | Net value  | Retand IGST<br>Tax | Total      |
| 1                                                                                                                                                                                                                                  | 64258 20W 12V VS250 TRANS<br>4006594749105 ; AA394410013 ; AL/ECCN No. : NNN / HSN: 85392190<br>Germany | 6.270                  | 30.750                                                                                                                                                                                                                        | 3              | 0%                          | 721.0000                    | 750              | 540,750.00  | 0.00          | 540,750.00 | 0.00               | 540,750.00 |

### 33. Inward E-way bill

T-code: ZLE85\_T214. Inward E-way bill data extract.

Select excel file which is save vendor code and vendor invoice number.

FILE HOME INSERT PAGE LAYOUT FORMULAS DATA

E8 :

|   | A      | B              | C | D | E | F |
|---|--------|----------------|---|---|---|---|
| 1 | Vendor | Vendor invoice |   |   |   |   |
| 2 | 2      | 90008765       |   |   |   |   |
| 3 | 85     | 60008765       |   |   |   |   |
| 4 |        |                |   |   |   |   |

File format upload invoice number.

**IB data Extract for E way Bill**

Upload file path:

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

- If the vendor invoice number in the upload file exist in the system, then download the file into folder C:\Ewbill.
- If the vendor invoice number in the upload file not exist in the system, then download error file in folder C:\Ewbill\_error.

### 34. Traceability Management:

#### 1. Scan traceability information into SAP database

Own warehouse with wireless scanner (PDA)

SAP Transaction: ZLE85\_T018


Own warehouse use wireless scanner should login with:

[https://app22p85.mch.osram.de:8222/sap/zle85\\_its01?sap-client=850&sap-language=EN](https://app22p85.mch.osram.de:8222/sap/zle85_its01?sap-client=850&sap-language=EN)

Chinese Version:

[https://app22p85.mch.osram.de:8222/sap/zle85\\_its01?sap-client=850](https://app22p85.mch.osram.de:8222/sap/zle85_its01?sap-client=850) Its characteristics:

- a Normally only available for outbound before PGI, except outbounds in ZLE85\_T024 b Do not accept blocked p. Code.

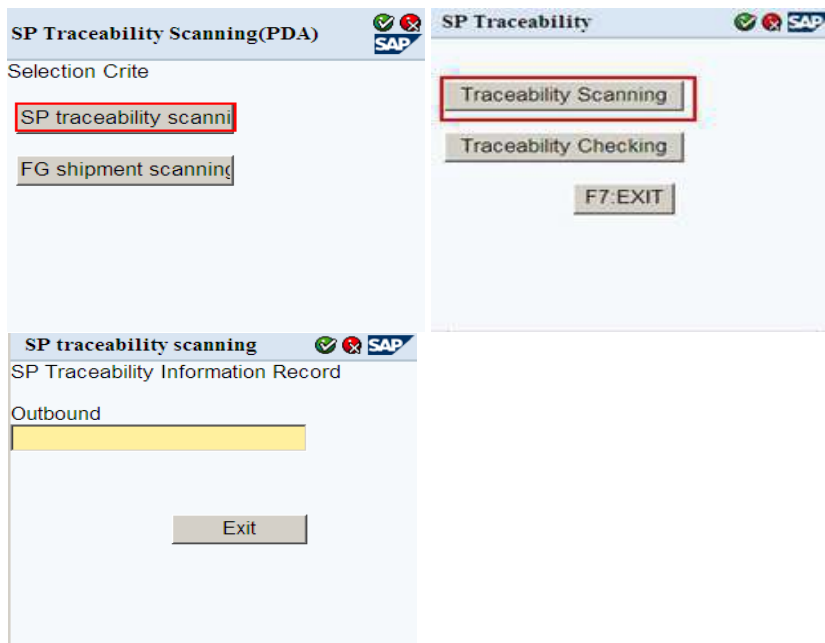

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

The screenshot shows a SAP dialog box titled "Save Scanning Data information". It contains a green checkmark icon and the text "Save scanning data success!". Below this, it says "SP Traceability Information Record" and "Scanned Record Saved!". At the bottom, there are two buttons: "Next outbound" and "Exit".

### 2. 3PL warehouse with cable scanner

The left screenshot shows the "Scanning P.Code/Pall.No for Outbound: 0302065801" screen. It displays "Last scanned:" and "To be scanned total: 48 / 48". Below this, it says "To be scanned mat:" and "P.code/pall.No.". There is a yellow input field for the P.code/pall.No. with a red arrow pointing to it and the text "Area to scan the p.code or pallet number.". At the bottom, there are "Finish" and "Back" buttons. Red arrows point from the "Finish" button to the text "Save the scanned record" and from the "Back" button to the text "Back to the ZLE85\_T018 initial screen".

The right screenshot shows the same screen after scanning. It displays "Last scanned: A62941C00DG" and "To be scanned total: 47 / 48". Below this, it says "To be scanned mat: 35" and "P.code/pall.No.". At the bottom, there are "Finish" and "Back" buttons.

Transaction code:

ZLE85\_T023 Its

characteristics:

- a Can monitor outbound before PGI
- b Normally only available for outbound before PGI, except outbound in ZLE85\_T024
- c User can delete records

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

- d Print out Advise Note after finish scanning automatically Do not accept blocked p. Code.

**SP Traceability Information Record**

Organizational Data

Plant  

Shipping Point

Document

Outbound Delivery  to

Outbound Create On  to

Display

☒ Only Open Outbound

☐ All Outbound

### Field descriptions

|                    |   |                                                                                               |
|--------------------|---|-----------------------------------------------------------------------------------------------|
| Plant              | M |                                                                                               |
| Shippint point     | M |                                                                                               |
| Outbound delivery  | O |                                                                                               |
| Outbound create on | O | Outbound creation date                                                                        |
| Display            | M | Choose “only open outbound” when the outbound is first scan, otherwise, choose “all outbound” |

**SP Traceability Outbound List**

 Record

| Flag                                | Rescan | Outbound  | Ship-to party | Ship to Party | PLGI date  | Plant |
|-------------------------------------|--------|-----------|---------------|---------------|------------|-------|
| <input checked="" type="checkbox"/> |        | 302065951 | 57026263      | Jell Co       | 2013.01.07 | D500  |

## Standard Operating Procedure (SOP)

**SP traceability information recording record. Outbound: 302065951**

Save Record ☐ Display Records ☐

P.Code/Pallet number: (P)A49520C0604(W)02(L)014(D)031212(S)2(V)0008

| Material    | Last Scanned P.Code/Pallet No.                | Carton QTY(EAN 40) | QTY to be scanned |
|-------------|-----------------------------------------------|--------------------|-------------------|
| A43432C0302 | (P)A43432C0302(W)02(L)014(D)030112(S)2(V)0018 | 20                 | 0                 |
| A45722F0302 | (P)A45722F0302(W)02(L)014(D)031212(S)2(V)0007 | 7                  | 0                 |
| A49520C0604 | (P)A49520C0604(W)02(L)014(D)031212(S)2(V)0007 | 8                  | 1                 |

**IE\* Caution**

Outbound 0302065951 Scanning finished, are you want to save?

[illegible]


## Transaction: ZLE85 T018

Own warehouse use wireless scanner should login with:

**March 01,**

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

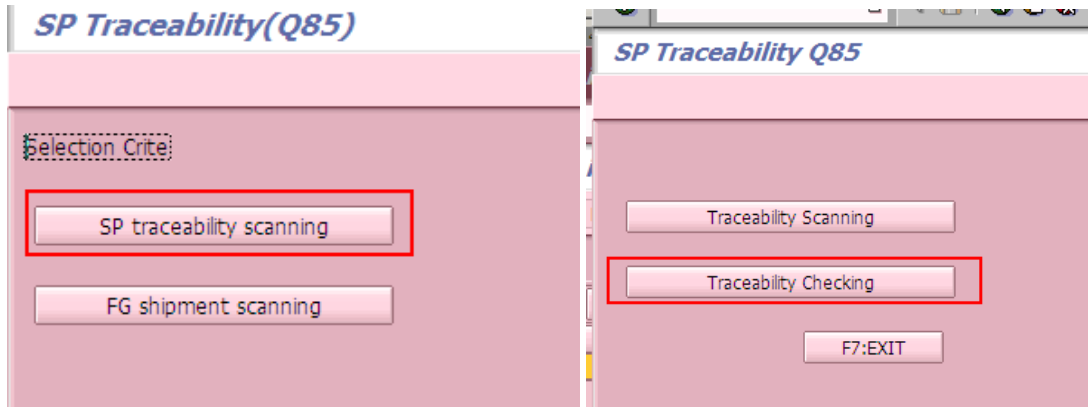

**SP Blocking Checking Q85**

Production Code

Ship-to

F7:EXIT

**SP Blocking Checking Q85**

Production Code

(P)AA3857300DG(W)DG(L)SP2(D)10101...

Ship-to

P.Code blocked.You should pick it out.

OK

F7:EXIT

- a. Scan p. code without ship-to party.
- b. Scan p. code with ship-to party.

**SP Blocking Checking Q85**

Production Code

(L)SP2(D)101013(C)001011100(V)0001

Ship-to 51003082

F7:EXIT

**SP Blocking Checking Q85**

Production Code

(P)AA3857300DG(W)DG(L)SP2(D)10101...

Ship-to 57000232

P.Code blocked.You should pick it out.

OK

F7:EXIT

✗ PCode is blocked


# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### 36.Traceability Monitor report

Transaction: ZLE85\_T025

This report is to monitor the scanning performance of warehouse. If scanning is complete, the message is green; otherwise there will be red or yellow messages.

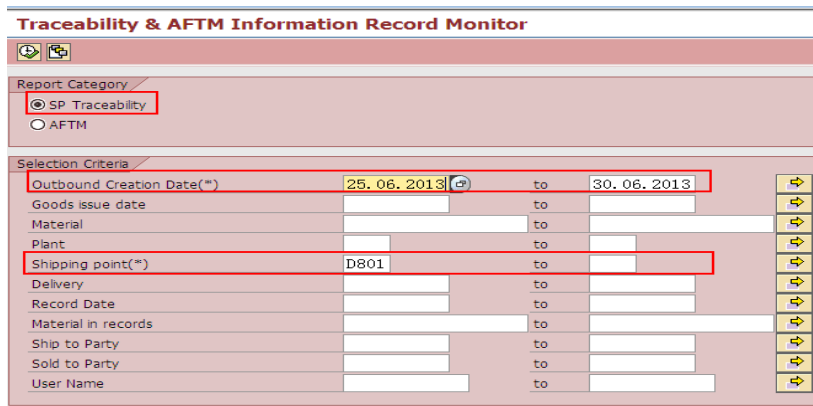

**Traceability & AFTM Information Record Monitor**

Report Category

☒ SP Traceability

☐ AFTM

Selection Criteria

|                           |            |    |            |  |
|---------------------------|------------|----|------------|--|
| Outbound Creation Date(*) | 25.06.2013 | to | 30.06.2013 |  |
| Goods issue date          |            | to |            |  |
| Material                  |            | to |            |  |
| Plant                     |            | to |            |  |
| Shipping point(*)         | D801       | to |            |  |
| Delivery                  |            | to |            |  |
| Record Date               |            | to |            |  |
| Material in records       |            | to |            |  |
| Ship to Party             |            | to |            |  |
| Sold to Party             |            | to |            |  |
| User Name                 |            | to |            |  |

#### [Field descriptions](#)

| Field                  | Mandatory / optional | Description                            |
|------------------------|----------------------|----------------------------------------|
| Outbound creation date | M                    |                                        |
| Goods issue date       | O                    |                                        |
| Material               | O                    |                                        |
| Plant                  | O                    |                                        |
| Shipping point         | M                    |                                        |
| Delivery               | O                    | Outbound delivery                      |
| Record Date            | O                    | Date of scanning                       |
| Material in records    | O                    | Material number in the p.code recorded |
| Ship to Party          | O                    |                                        |
| Sold to Party          | O                    |                                        |
| User Name              | O                    | User of scanning                       |

# OSRAM Lighting Private Limited

## Standard Operating Procedure (SOP)

### Traceability Information Record Monitor

| Outbound   | Item | Shipping | Plant | Material No. | Description | Qty       | UM | PGI | Qty/Ship | CartonBox | Material Scanned | Scanned Q | Block | User  | Last Recor | Message C | Status        |
|------------|------|----------|-------|--------------|-------------|-----------|----|-----|----------|-----------|------------------|-----------|-------|-------|------------|-----------|---------------|
| 0302065533 | 10   | 8702     | 8700  | A57082B00    | 35XT6-L-D3  | 96.000    | ST | Y   | 32.000   | 3.000     |                  | 0.000     |       |       |            | Error     | Miss scanning |
| 0302065533 | 20   | 8702     | 8700  | A62941C00    | 35XT6-A-D   | 64.000    | ST | Y   | 32.000   | 2.000     |                  | 0.000     |       |       |            | Error     | Miss scanning |
| 0302065533 | 30   | 8702     | 8700  | A70525700    | 25XT6-A/1   | 32.000    | ST | Y   | 32.000   | 1.000     |                  | 0.000     |       |       |            | Error     | Miss scanning |
| 0302065755 | 10   | 8702     | 8700  | A57082B00    | 35XT6-L-D3  | 64.000    | ST | Y   | 32.000   | 2.000     | A57082B00DG      | 2.000     |       | J.YAN | 2012.11.27 | OK        | Complete      |
| 0302065755 | 20   | 8702     | 8700  | A62941C00    | 35XT6-A-D   | 128.000   | ST | Y   | 32.000   | 4.000     | A62941C00DG      | 4.000     |       | J.YAN | 2012.11.27 | OK        | Complete      |
| 0302065756 | 10   | 8702     | 8700  | A57082B00    | 35XT6-L-D3  | 64.000    | ST | Y   | 32.000   | 2.000     | A57082B00DG      | 2.000     |       | J.YAN | 2012.11.27 | OK        | Complete      |
| 0302065756 | 20   | 8702     | 8700  | A62941C00    | 35XT6-A-D   | 160.000   | ST | Y   | 32.000   | 5.000     | A62941C00DG      | 5.000     | X     | J.YAN | 2012.11.27 | Warning   | Blocked P.C.  |
| 0302065822 | 30   | 8702     | 8700  | A57082B00    | 35XT6-L-D3  | 384.000   | ST | Y   | 32.000   | 12.000    |                  | 0.000     |       |       |            | Error     | Miss scanning |
| 0302065822 | 40   | 8702     | 8700  | A62941C00    | 35XT6-A-D   | 1,152.000 | ST | Y   | 32.000   | 36.000    |                  | 0.000     |       |       |            | Error     | Miss scanning |

Transaction: ZLE85\_T025a

Similar operation as ZLE85\_T025, users are able to enter reasons for miss scanning:

### Traceability Information Record Monitor

| Qty/Ship                          | CartonBox | Material Scanned | Scanned Q  | Block | P.code | User   | Last Recor | Message Co | Status        | Reason code | Reason text          |
|-----------------------------------|-----------|------------------|------------|-------|--------|--------|------------|------------|---------------|-------------|----------------------|
| 200.000                           | 1         | S                | A477996 01 | 3.000 |        | R.SHEN | 2013. 07.  | Error      | Miss scanning |             |                      |
| 180.000                           | 1         |                  |            | 0.000 |        |        |            | Error      | Miss scanning |             |                      |
| 200.000                           | 1         |                  |            | 0.000 |        |        |            | Error      | Miss scanning | ROS         | 3PL pay it for scrap |
| @ Reason code (1) 7 Entries found |           |                  |            |       |        |        |            |            |               |             | 0 /                  |
| 200                               | 1         |                  |            | 0.000 |        |        |            | Error      | Miss scanning |             |                      |
| 180.000                           |           |                  |            |       |        |        |            | Error      | Miss scanning |             |                      |
| 200                               | 1         |                  |            | 0.000 |        |        |            | Error      | Miss scanning |             |                      |
| 180.000                           |           |                  |            |       |        |        |            | Error      | Miss scanning |             |                      |

Reason

Reason text

R01 TCS special release for blocked stock CS

R02 sample release

R03 Manual error

R04 Defect returned for sorting

ROS 3PL pay it for scrap

R99 Others(please specify)

Blank